


Introduction to I/O and Disk Management


Secondary Storage Management

Disks — just like memory, only different

- ◆ Why have disks?
 - Memory is small. Disks are large.
 - ◆ Short term storage for memory contents (e.g., swap space).
 - ◆ Reduce what must be kept in memory (e.g., code pages).
 - Memory is volatile. Disks are forever (?)
 - ◆ File storage.



	GB/dollar	dollar/GB
RAM	0.013(0.015,0.01)	\$77(\$68,\$95)
Disks	3.3(1.4,1.1)	30¢ (71¢,90¢)



Capacity : 2GB vs. 1TB
2GB vs. 400GB
1GB vs 320GB

How to approach persistent storage

- ◆ Disks first, then file systems.
 - Bottom up.
 - Focus on device characteristics which dominate performance or reliability (they become focus of SW).
- ◆ Disk capacity (along with processor performance) are the crown jewels of computer engineering.
- ◆ File systems have won, but at what cost victory?
 - Ipod, iPhone, TivO, PDAs, laptops, desktops all have file systems.
 - Google is made possible by a file system.
 - File systems rock because they are:
 - ◆ Persistent.
 - ◆ Heirarchical (non-cyclical (mostly)).
 - ◆ Rich in metadata (remember cassette tapes?)
 - ◆ Indexible (hmmm, a weak point?)
- ◆ The price is complexity of implementation.

Different types of disks

- ◆ Advanced Technology Attachment (ATA)
 - Standard interface for connecting storage devices (e.g., hard drives and CD-ROM drives)
 - Referred to as IDE (Integrated Drive Electronics), ATAPI, and UDMA.
 - ATA standards only allow cable lengths in the range of 18 to 36 inches. CHEAP.
- ◆ Small Computer System Interface (SCSI)
 - Requires controller on computer and on disk.
 - Controller commands are sophisticated, allow reordering.
- ◆ USB or Firewire connections to ATA disc
 - These are new bus technologies, not new control.
- ◆ Microdrive – impressively small motors


Different types of disks

- ◆ Bandwidth ratings.
 - These are unachievable.
 - 50 MB/s is max off platters.
 - Peak rate refers to transfer from disc device' s memory cache.
- ◆ SATA II (serial ATA)
 - 3 Gb/s (still only 50 MB/s off platter, so why do we care?)
 - Cables are smaller and can be longer than pATA.
- ◆ SCSI 320 MB/s
 - Enables multiple drives on same bus


Mode	Speed
UDMA0	16.7 MB/s
UDMA1	25.0 MB/s
UDMA2	33.3 MB/s
UDMA3	44.4 MB/s
UDMA4	66.7 MB/s
UDMA5	100.0 MB/s
UDMA6	133 MB/s


Flash: An upcoming technology







- ◆ Flash memory gaining popularity
 - One laptop per child has 1GB flash (no disk)
 - Vista supports Flash as accelerator
 - Future is hybrid flash/disk or just flash?
 - Erased a block at a time (100,000 write-erase-cycles)
 - Pages are 512 bytes or 2,048 bytes
 - Read 18MB/s, write 15MB/s
 - Lower power than (spinning) disk



	GB/dollar	dollar/GB
RAM	0.013(0.015,0.01)	\$77(\$68,\$95)
Disks	3.3 (1.4,1.1)	30¢ (71¢,90¢)
Flash	0.1	\$10





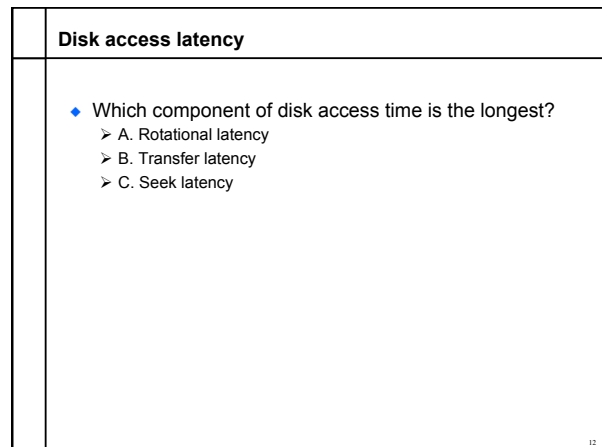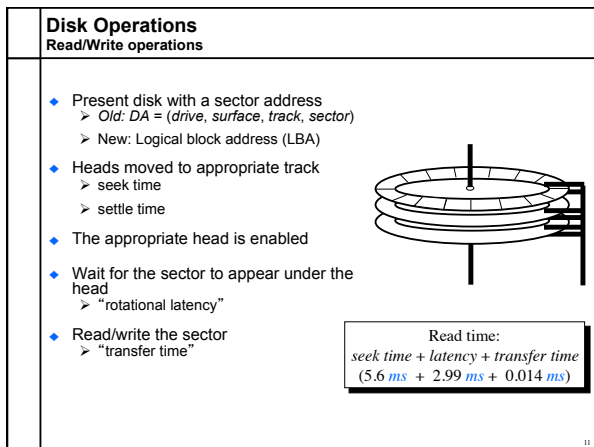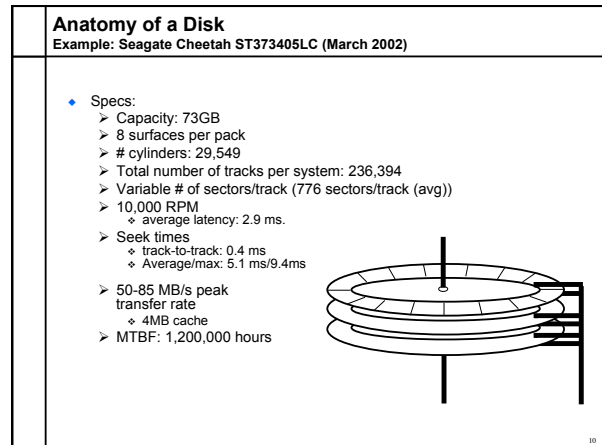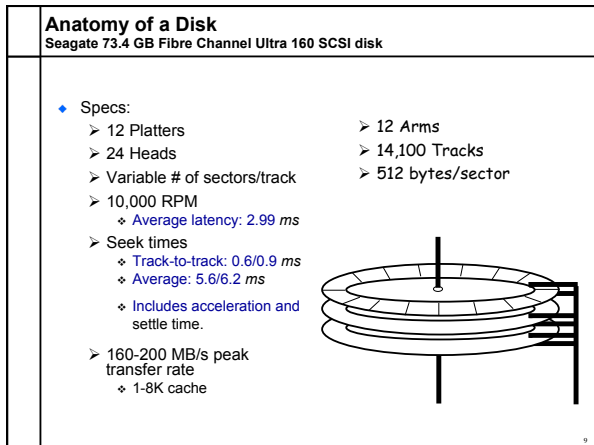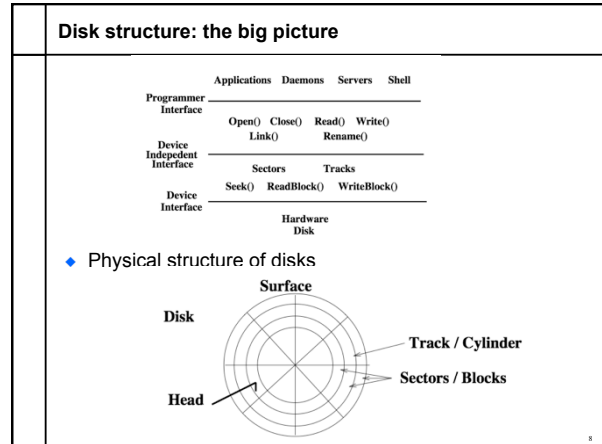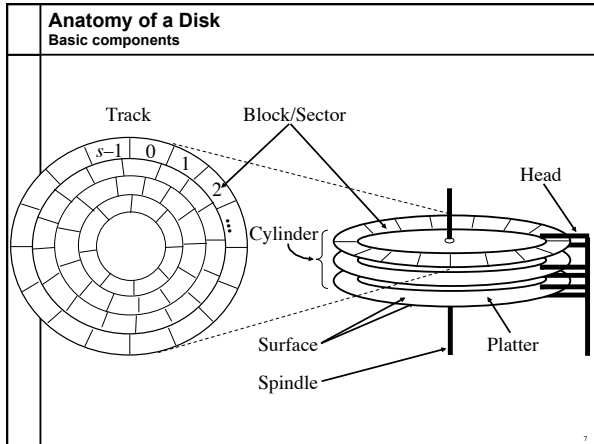

Disk Addressing

- Software wants a simple “disc virtual address space” consisting of a linear array of sectors.
 - Sectors numbered 1..N, each 512 bytes (typical size).
 - Writing 8 surfaces at a time writes a 4KB page.
- Hardware has structure:
 - Which platter?
 - Which track within the platter?
 - Which sector within the track?
- The hardware structure affects latency.
 - Reading from sectors in the same track is fast.
 - Reading from the same cylinder group is faster than seeking.

13

Disk Addressing

Mapping a 3-D structure to a 1-D structure

- Mapping criteria
 - block $n+1$ should be as “close” as possible to block n

14

The Impact of File Mappings

File access times: Contiguous allocation

- Array elements map to contiguous sectors on disk
 - Case1: Elements map to the middle of the disk

$$5.6 + 3.0 + 6.0 \frac{2,048}{424} = 8.6 + 29.0 = 37.6 \text{ ms}$$

Seek Time

Latency

Transfer Time

=

$\frac{\text{time per revolution}}{\text{revolution}} \times \text{number of revolutions required to transfer data}$

Constant Terms

Variable Term

15

The Impact of File Mappings

File access times: Contiguous allocation

- Array elements map to contiguous sectors on disk
 - Case1: Elements map to the middle tracks of the platter

$$5.6 + 3.0 + 6.0 \frac{2,048}{424} = 8.6 + 29.0 = 37.6 \text{ ms}$$

Case2: Elements map to the inner tracks of the platter

$$5.6 + 3.0 + 6.0 \frac{2,048}{212} = 8.6 + 58.0 = 66.6 \text{ ms}$$

Case3: Elements map to the outer tracks of the platter

$$5.6 + 3.0 + 6.0 \frac{2,048}{636} = 8.6 + 19.3 = 27.9 \text{ ms}$$

16

Disk Addressing

The impact of file mappings: Non-contiguous allocation

- Array elements map to random sectors on disk
 - Each sector access results in a disk seek

$$2,048 \times (5.6 + 3.0) = 17.6 \text{ seconds}$$

17

Practical Knowledge

- If the video you are playing off your hard drive skips, defragment your file system.
- OS block allocation policy is complicated. Defragmentation allows the OS to revisit layout with global information.
- Unix file systems need defragmentation less than Windows file systems, because they have better allocation policies.

18

Defragmentation Decisions

- Files written when the disk is nearly full are more likely to be fragmented.
 - A. True
 - B. False

19

Disk Head Scheduling

Maximizing disk throughput

- In a multiprogramming/timesharing environment, a queue of disk I/O requests can form

The OS maximizes disk I/O throughput by minimizing head movement through *disk head scheduling*

20

Disk Head Scheduling

Examples

- Assume a queue of requests exists to read/write tracks:

83	72	14	147	16	150
----	----	----	-----	----	-----

 and the head is on track 65

21

Disk Head Scheduling

Examples

- Assume a queue of requests exists to read/write tracks:

83	72	14	147	16	150
----	----	----	-----	----	-----

 and the head is on track 65

FCFS scheduling results in the head moving 550 tracks
Can we do better?

22

Disk Head Scheduling

Minimizing head movement

- Greedy scheduling: *shortest seek time first*
 - Rearrange queue from:

83	72	14	147	16	150
----	----	----	-----	----	-----
 - To:

14	16	150	147	82	72
----	----	-----	-----	----	----

23

Disk Head Scheduling

Minimizing head movement

- Greedy scheduling: *shortest seek time first*
 - Rearrange queue from:

83	72	14	147	16	150
----	----	----	-----	----	-----
 - To:

14	16	150	147	82	72
----	----	-----	-----	----	----

SSTF scheduling results in the head moving 221 tracks
Can we do better?

24

Disk Head Scheduling

SCAN scheduling

- Rearrange queue from:

83	72	14	147	16	150
----	----	----	-----	----	-----

To:

150	147	83	72	14	16
-----	-----	----	----	----	----

"SCAN" scheduling: Move the head in one direction until all requests have been serviced and then reverse. Also called elevator scheduling.
Moves the head 187 tracks

25

Disk Head Scheduling

Other variations

- C-SCAN scheduling ("Circular"-SCAN)
 - Move the head in one direction until an edge of the disk is reached and then reset to the opposite edge

LOOK scheduling
Same as C-SCAN except the head is reset when no more requests exist between the current head position and the approaching edge of the disk

26

Disk Performance

Disk partitioning

- Disks are typically partitioned to minimize the largest possible seek time
 - A partition is a collection of cylinders
 - Each partition is a logically separate disk

27

Disks – Technology Trends

- Disks are getting smaller in size
 - Smaller → spin faster; smaller distance for head to travel; and lighter weight
- Disks are getting denser
 - More bits/square inch → small disks with large capacities
- Disks are getting cheaper
 - 2x/year since 1991
- Disks are getting faster
 - Seek time, rotation latency: 5-10%/year (2-3x per decade)
 - Bandwidth: 20-30%/year (~10x per decade)
- Overall:
 - Disk capacities are improving much faster than performance

28

Management of Multiple Disks

Using multiple disks to increase disk throughput

- Disk striping (RAID-0)
 - Blocks broken into sub-blocks that are stored on separate disks
 - similar to memory interleaving
 - Provides for higher disk bandwidth through a larger effective block size

29

Management of Multiple Disks

Using multiple disks to improve reliability & availability

- To increase the reliability of the disk, redundancy must be introduced
 - Simple scheme: disk mirroring (RAID-1)
 - Write to both disks, read from either.

30

Who controls the RAID?

- ◆ **Hardware**
 - +Tend to be reliable (hardware implementers test)
 - +Offload parity computation from CPU
 - Hardware is a bit faster for rewrite intensive workloads
 - -Dependent on card for recovery (replacements?)
 - -Must buy card (for the PCI bus)
 - -Serial reconstruction of lost disk
- ◆ **Software**
 - -Software has bugs
 - -Ties up CPU to compute parity
 - +Other OS instances might be able to recover
 - +No additional cost
 - +Parallel reconstruction of lost disk

Management of Multiple Disks

Using multiple disks to increase disk throughput

- ◆ RAID (*redundant array of inexpensive disks*) disks
 - Byte-wise striping of the disks (RAID-3) or block-wise striping of the disks (RAID-0/4/5)
 - Provides better performance and reliability
- ◆ Example: storing the byte-string 101 in a RAID-3 system

Improving Reliability and Availability

RAID-4

- ◆ Block interleaved parity striping
 - Allows one to recover from the crash of any one disk
 - Example: storing 8, 9, 10, 11, 12, 13, 14, 15, 0, 1, 2, 3

RAID-4 layout:

Disk 1	Disk 2	Disk 3	Parity Disk
1111	0000	0011	1100
1111	1111	0011	0011
0000	0000	0011	0011

Improving Reliability and Availability

RAID-5 Block interleaved parity striping

Disk 1	Disk 2	Disk 3	Disk 4	Disk 5
1111	0000	0041	0101	Block x Parity
1111	1111	0051	0120	0110
0000	0000	0001	0130	0110

Improving Reliability and Availability

RAID-5 Block interleaved parity striping

Disk 1	Disk 2	Disk 3	Disk 4	Disk 5
Block x	0000	0041	0101	Block x Parity
Block x+1 Parity	0000	0011	0101	0110
Block x+2	Block x+2 Parity	0011	0101	0110
Block x+3	0000	Block x+3 Parity	0101	0110