GPUSync: A Framework for Real-Time GPU Management *

Glenn A. Elliott, Bryan C. Ward, and James H. Anderson
Department of Computer Science, University of North Carolina at Chapel Hill

Abstract

The integration of graphics processing units (GPUs) into real-time systems has recently become an active area of research. However, prior research on this topic has failed to produce real-time GPU allocation methods that fully exploit the available parallelism in GPU-enabled systems. In this paper, a GPU management framework called GPUSync is described that enables increased parallelism while providing predictable real-time behavior. GPUSync can be applied in multi-GPU real-time systems, is cognizant of the system bus architecture, and fully exposes the parallelism offered by modern GPUs, even when closed-source GPU drivers are used. Schedulability tests presented herein that incorporate empirically measured overheads, including those due to bus contention, demonstrate that GPUSync offers real-time predictability and performs well in practice.

1 Introduction

Graphics processing units (GPUs) are commonly used today to accelerate intensive general-purpose computations, a practice termed *GPGPU*. The breadth of application domains that can benefit from GPGPU includes many in which *real-time* constraints exist. In automotive systems, for example, GPUs can be utilized to perform eye tracking [18], pedestrian detection [25], navigation [14], and obstacle avoidance [23]. If a single platform consolidates such features, then it may require a multicore system with multiple GPUs. Such systems are the focus of this paper.

CPU scheduling in such a system can follow a partitioned, clustered, or global approach. Under clustered scheduling, a system's m CPUs are partitioned into clusters of c CPUs each, and each task is scheduled within a specific cluster. Partitioned and global scheduling are special cases, where $c = 1$ and $c = m$, respectively. Similarly, GPUs can be organized by following a partitioned, clustered, or global approach. This categorization yields nine possible allocation categories, as illustrated in matrix form in Fig. 1.

It is currently unclear which allocation categories in Fig. 1 should be preferred in practice. To determine this, we are currently engaged in a long-term study in which these categories will be compared on the basis of real-time schedulability, for both fixed-priority (FP) and earliest-deadline-first (EDF) task prioritizations—18 categories in total. For such a comparison to be meaningful, per-category methods are needed for utilizing the considerable parallelism available in multi-GPU systems. After all, GPU-enabled systems are architected with the goal of fostering parallelism in mind.



Figure 1: Matrix of CPU and GPU organization.

This paper is directed at such methods. Our goal is to determine how GPU-related parallelism can be dealt with within a *single* category in Fig. 1 when assessing schedulability (cross category comparisons are left for future work). Due to space constraints, we cannot consider all 18 alternatives. Thus, we limit attention to EDF scheduling under the shaded categories, as these sufficiently expose most interesting parallelism-related issues.

GPU-related parallelism. In any GPU-enabled multicore system, parallelism-related issues arise at several levels. For example, data must be transmitted to a GPU before computation begins; ideally, GPU transmissions and computation should overlap in time. Additionally, such transmissions result in increased traffic on shared buses, which are utilized in parallel by different tasks for different purposes. Bus traffic needs to be managed carefully or *all* computations in the system may be slowed [20]. If a system has multiple GPUs, as we assume, then further opportunities for parallelism exist. For example, on such a platform, it may be desirable to use a clustered or global GPU organization in order to avoid the utilization loss common to partitioned approaches. However, a GPU-using task may develop memory-based *affinity* for a particular GPU as it executes. In such cases, program state (data) is stored in GPU memory that is accessed each time the task executes on that particular GPU. This state must be *migrated* each time the task uses a GPU different from the one it used previously. Such migrations increase bus traffic and thus affect system-wide performance and predictability.

As explained in greater detail later, prior work on real-time GPU management has only partially addressed these parallelism-related issues. Furthermore, issues unique to multi-GPU systems have received very little attention.

Contributions. In this paper, we present a real-time GPU management framework called GPUSync, which is cognizant of system architecture and task GPU affinity and exploits the parallelism offered by modern GPUs. While the management of GPUs is viewed as a *scheduling* problem in

*Supported by NSF grants CNS 1016954, CNS 1115284, and CNS 1218693; ARO grant W911NF-09-1-0535; AFOSR grant FA9550-09-1-0549; AFRL grant FA8750-11-1-0033; and an NSF graduate fellowship.

most prior related efforts (e.g., see [2, 6, 15, 16]), we view such management as a *synchronization* problem. This viewpoint reflects the fact that GPUs are treated as I/O devices by the scheduler within the OS (even in on-chip architectures).

As noted above, we focus exclusively herein on EDF scheduling applied to the shaded categories in Fig. 1. However, variants of GPUSync that utilize different synchronization techniques can be applied to the other categories.

This paper's organization and our specific contributions are as follows. After addressing necessary preliminaries in Secs. 2 and 3, we describe the design of GPUSync in Sec. 4. GPUSync utilizes real-time locking protocols to manage GPU-related resources, so blocking bounds are needed for schedulability analysis—these we derive in Sec. 5. GPUSync is configurable in many respects. For example, the "distance" (with respect to the interconnection topology) that GPU data can migrate and the "chunking size" to use are configurable. Sec. 6 presents an assessment of tradeoffs concerning such configurable settings from both schedulability and runtime-performance perspectives. For the former purpose, we implemented GPUSync in UNC's Linux-based LITMUS$^{\mathrm{RT}}$ real-time OS [5], measured relevant overheads, and applied these overheads within overhead-aware schedulability studies. For the latter purpose, we conducted studies in which various real-time-related metrics were recorded for test workloads. Many of our proposed GPU management techniques proved able to either improve schedulability or improve actual performance without degrading schedulability. After discussing these results, we conclude in Sec. 7.

2 Target Platform

Our assumed target platform is a multicore system with one or more GPUs. The task systems we envision being hosted on such a platform are motivated by the automotive systems mentioned in Sec. 1. Specifically, we assume that such tasks are sporadic, have provisioned worst-case execution times that are rarely (if ever) exceeded, and are subject to the soft real-time (SRT) constraint of bounded deadline tardiness. In work on CPU scheduling, the clustered and global scheduling alternatives highlighted in Fig. 1 have been shown to be particularly effective in supporting such task systems [4].

It may seem counterintuitive to allow deadline tardiness in a safety-critical automotive application. However, "bounded tardiness" does not necessarily equate to "unsafe." For example, the reaction time of an *alert* driver is about 700ms [13]. Thus, a pedestrian avoidance system may only need to react to events within a 700ms window to be a viably safe system. Furthermore, a system designer may only be able to implement basic safety features under hard real-time (HRT) constraints (no tardiness), yet more complex and robust systems may be possible if stringent requirements are relaxed.[1] These robust systems may indeed be *safer* than basic ones, despite bounded tardiness. This is especially true if empirical tests show that deadline misses are rare even when tardiness is merely bounded analytically.

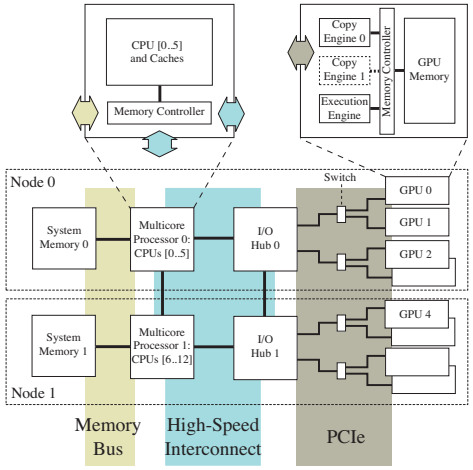

Figure 2: Assumed system architecture.

High-level architecture of assumed system. GPUSync should expose the parallelism offered by the underlying hardware to the extent possible while maintaining bounded tardiness. We now describe the canonical architecture assumed in this paper and the parallelism it offers. This canonical system is based on the lab machine used in our experiments. We note potentially interesting architectural alternatives found in other systems where appropriate. Due to space limitations, we limit attention to GPU technologies from NVIDIA, whose CUDA [1] platform is a popular GPGPU solution. However, our techniques may also be used with GPUs from other manufacturers.

Fig. 2 depicts the high-level architecture of the assumed system, which is a large-scale GPU-enabled system. There are four major types of components: system memory, multicore (MC) processors,[2] I/O hubs, and GPUs. These components are connected via three bus interconnects: the memory bus, high-speed processor interconnect, and PCIe bus.

The CPUs in each MC processor are connected to system memory by an on-chip memory controller attached directly to the memory bus. The MC processors are linked through full-duplex high-speed interconnects that allow data to travel in both directions simultaneously at full speed. On the MC processors, these interconnects communicate directly with the memory controller, allowing access to system memory. The I/O hubs also connect to each other and the MC processors using the same high-speed interconnect. Thus, I/O hubs can also access system memory.

The I/O hubs connect to GPUs using a packet-switched, dual-simplex, PCIe bus.[3] Each I/O hub has many independent "lanes" that are bundled in parallel to form "links." Each

[1] True HRT constraints are problematic in a GPU-enabled system anyway due to hardware complexity in such systems, the closed-source nature of GPU drivers, and the lack of timing analysis tools for such systems [8].

[2] We use the terms "CPU" and "core" interchangeably. We use the term "multicore processor" to refer an entire multicore chip.

[3] A dual-simplex bus is functionally equivalent to a full-duplex bus. The two only differ at the physical level.

link attaches to a PCIe *switch* that multiplexes additional links to increase the number of supported GPUs. Thus, the PCIe bus is organized hierarchically.[4] The GPUs attach to the links provided by the switches.[5] Devices can also *transmit directly to each other* if they share an I/O hub.

At the highest level, components are partitioned into non-uniform memory access (NUMA) nodes. As seen in Fig. 2, each NUMA node includes a pool of system memory, a MC processor, an I/O hub, and a collection of GPUs.[6] Memory and device access across nodes is supported, but requires an additional "hop" over the high-speed interconnect. Thus, memory traffic should be localized within a node if possible.

GPU architecture. As seen in Fig. 2, a GPU has four major components: an *execution engine*, one or more DMA *copy engines*, a memory controller, and specialized high-speed memory. The execution engine consists of many parallel processors and performs computations, similar to a CPU. The copy engines, connected to the PCIe bus, transmit data between system memory and GPU memory. Though the PCIe bus is dual-simplex, most GPUs only have one copy engine, and thus cannot send and receive data at the same time. However, high-end GPUs may have an additional copy engine, enabling simultaneous bi-directional transmissions.

The execution and copy engines operate independently—a copy engine may transmit data while the execution engine executes. Also, some modern GPUs have the capability to transmit directly to each other, bypassing system memory.

GPGPU operations and state migration. GPGPU programs execute on CPUs and invoke programs on GPUs called *kernels*. The typical execution sequence is as follows: (i) transmit input data for GPU kernels from system memory to GPU memory; (ii) execute kernels to operate on the input data, storing results in GPU memory; (iii) copy results from GPU memory back to system memory. A program may repeat this sequence several times before completing. Each action, unless explicitly broken up by the programmer, is performed non-preemptively by the GPU.

In addition to memory used for input and output, recurrent tasks may maintain *state* in GPU memory. For example, motion-tracking algorithms maintain information about the movement of objects between video frames. A task has *affinity* with the GPU that holds its most recent state. State must migrate with tasks from one GPU to another.[7] The *cost* of migration is the time it takes to move state from one GPU to another. Cost is partly dependent upon the method used to copy state between GPUs as well as the *distance* between GPUs. Distance is the number of links to the nearest common switch or I/O hub of two GPUs. For example, in Fig. 2, the distance between GPUs 0 and 2 is two (one link to a switch, a second link to a common I/O hub). Migrations using direct GPU-to-GPU memory copies, especially over short distances, are fast due to proximity and likely reduce bus contention since less distance is traveled.

Architectural implications. From a real-time perspective, we wish to constrain system utilization the least while maintaining predictable real-time performance. System utilization can be increased by exploiting parallelism. In the architecture above, GPU-related parallelism includes the dual-simplex PCIe bus and the independent operation of the execution and copy engines. Efficient GPU management techniques should allow the simultaneous use of these components. However, this is difficult due to bus contention issues.

GPGPU programs are data intensive and generate significant traffic between system and GPU memory. Within the same NUMA node in Fig. 2, data copied between system and GPU memory traverses the three buses, a system memory controller, and one PCIe switch. These elements are *shared* by concurrently executing operations. The speed of such a data copy is a function of contention, interconnect bandwidth, and bus arbitration protocols.

The management of bus contention in real-time systems has been explored extensively by Pellizzoni in his Ph.D. thesis [20]. However, his approach requires custom elements at every system level: specialized PCI hardware interposed between devices, OS modifications for memory and PCI bus scheduling, a custom compiler, and customized source code. While impressive in its scope, such an approach is currently infeasible in GPU-enabled real-time systems due to software complexity: the software stack that manages GPUs is exceedingly complex and often closed-source. Also, [20] does not address issues of GPU allocation and state migration. Instead, we endeavor to design efficient GPU resource management techniques that: (i) are cognizant of system architecture issues; (ii) aware of task GPU affinity; (iii) exploit the parallelism offered by modern GPUs; (iv) maintain real-time predictability; and (v) can be easily applied to existing systems and support a variety of real-time schedulers.

3 Prior GPU Approaches

Table 1 compares features of other notable GPU management frameworks related to GPUSync. PTasks [21], developed by Rossbach et al., creates a new OS-level infrastructure for GPU management. RGEM is a user-space real-time GPU scheduler designed by Kato et al. [15]. In more recent work, Kato et al. also developed Gdev, which extends many of the ideas developed in RGEM to the OS kernel space [16].

Other than GPUSync, only RGEM is designed for predictable real-time systems. RGEM schedules GPU operations by fixed priority. RGEM also addresses schedulabil-

[4] Unlike the older PCI bus where only one device on a bus may transmit data at a time, PCIe devices can transmit data simultaneously.

[5] Smaller systems may not be equipped with PCIe switches in which case GPUs attach directly to the I/O hubs.

[6] Nodes may share a single I/O hub in other configurations. Smaller systems may have only a single node and a single GPU.

[7] Memory must be pre-allocated on each GPU where a task may run to facilitate fast migrations. This is a reasonable constraint given that memory footprints of real-time GPU applications are relatively small. For example, the per-GPU memory footprint of an implementation of a complex computer vision algorithm that processes 640x480 resolution video streams is only 40MB [17]—much smaller than the 2GB and 6GB available in today's mid-range and high-end GPUs, respectively.

	Real-Time		Data/ Comp. Overlap	Auto. GPU Alloc.	P2P Migr.	Supports Clsd.-Src. Drivers
	FP	EDF				
PTasks			x	x		x
RGEM	x					x
Gdev			x			
GPUSync	x	x	x	x	x	x

Table 1: GPUSync vs. notable prior work.

ity problems caused by long non-preemptive copies between system and GPU memory by breaking large copies into smaller chunks, reducing the duration of priority inversions and thus improving schedulability. This chunking approach is also adopted by GPUSync.

PTasks and Gdev support the overlapping of GPU data transmissions and computation. PTasks uses data-flow graphs to describe flows of execution, and this is leveraged to individually schedule execution and copy engines. Gdev accomplishes overlapping by separately scheduling the execution and copy engines of a GPU. This is possible because Gdev is implemented in an open-source GPU device driver. This can be a limitation since these drivers lag behind vendor-provided ones with respect to performance, available features, and support for the most recent GPUs.

Excluding GPUSync, only PTasks supports automatic GPU allocation in multi-GPU systems. PTasks includes a data-aware GPU scheduler that attempts to greedily schedule GPU computations on the "best" available GPU at the time of an issued operation, where "best" is defined by GPU capabilities (such as speed) and affinity. However, data migration between GPUs must be performed by copying data to and from system memory. In the field of responsive or real-time GPGPU, no prior work has supported direct GPU-to-GPU, commonly referred to as *peer-to-peer* (*P2P*), migrations, let alone with real-time determinism.

Precursors to GPUSync use a synchronization-based approach for real-time GPU management in [10], with support for multiple GPUs added in [7] and [9]. GPUSync greatly expands upon these prior efforts by enabling fine-grained management of GPU resources.

4 GPUSync

We describe GPUSync's design by focusing on the platform depicted in Fig. 2, where EDF is used for CPU scheduling on a per-node basis, and the tasks assigned to a node can compete for any GPU within that node. This corresponds to the case of clustered CPU and GPU scheduling in Fig. 1. The other shaded regions in this figure can be seen as special-case instantiations of the case we consider.

GPUSync is made up of several components: a *GPU allocator* that utilizes a real-time k-exclusion locking protocol;[8] per-GPU real-time mutual exclusion (mutex) *engine locks*, one for each GPU copy and execution engine, to arbitrate access to those engines; and *API routines* that facilitate memory copies and P2P migrations.

[8] k-exclusion extends ordinary mutual exclusion by allowing up to k tasks to simultaneously hold a lock.

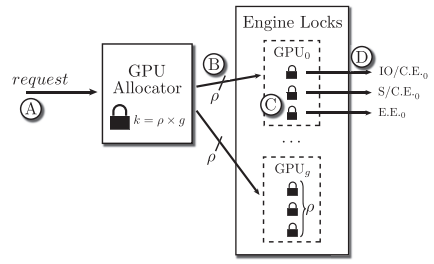

Figure 3: High-level design of GPUSync.

Fig. 3 illustrates how tasks acquire GPU-related resources. A request is issued to the GPU allocator in Step A. The GPU allocator determines the GPU to be allocated to satisfy the request, though the GPU may not be immediately available. The requesting job is allowed access to the assigned GPU once the GPU becomes available in Step B. In Step C, the job competes with other jobs allocated the same GPU for GPU engines; access is arbitrated by the engine locks. A job may access an engine on its assigned GPU after acquiring the corresponding engine lock in Step D.

We now describe GPUSync's individual components.

4.1 GPU Allocation and Engine Access

GPU allocation is performed using a k-exclusion locking protocol, and engine access is arbitrated by nested mutex locks. This overall locking strategy is derived from the *real-time nested locking protocol* (*RNLP*), which has been shown to be asymptotically optimal for supporting nested resource requests in multiprocessor real-time systems [27].

GPU allocator. We explain how GPU allocation is done by considering a single cluster with g GPUs (in Fig. 2, each node is a cluster and $g = 4$). GPU allocation is token-based. We associate ρ *GPU tokens* with each GPU. A job can only compete for access to a GPU's engines when it holds one of that GPU's tokens. The portion of a job's execution where a token must be held is called a *token critical section*. All GPU tokens are pooled and managed by a *single* k-exclusion lock, where $k = \rho \times g$. ρ is a configurable parameter. We explore the effect ρ has on schedulability further in Secs. 5 and 6.

We use a modified version of the Replica-Request Donation Global Locking Protocol (R^2DGLP), a recently proposed real-time k-exclusion locking protocol that is asymptotically optimal for globally-scheduled systems, to perform token allocation within a cluster [28]. Our modifications to the R^2DGLP are limited to load-balancing requests among GPUs and a few other technical details having to do with our particular usage of it. Due to space constraints, we cannot fully describe the R^2DGLP and only give a brief overview.

Access to each token in the R^2DGLP is arbitrated by a per-token FIFO-ordered queue, as seen in Fig 4. Jobs are enqueued on the shortest token queue upon token request. If

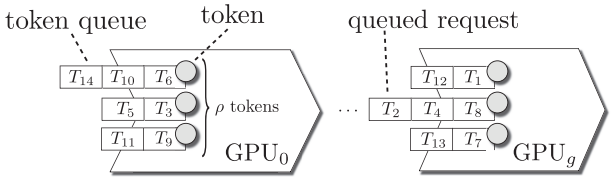

Figure 4: R^{2}DGLP token queues populated with token requests, identified by the task identifier, T_i, of the requesting task.

$k > 1$, then requests are load-balanced across queues.[9] An enqueued job suspends until it is at the head of its queue, in which case it is granted the corresponding token.

Engine locks. A mutex is associated with each GPU copy and execution engine, as seen in Fig. 3. For GPUs with *two* copy engines, there is some flexibility in how copy engines may be used. For example, one copy engine may be reserved only for P2P operations with the remaining engine used both for inbound and outbound data. For a machine like our evaluation platform, which has *one* copy engine per GPU, we are not able to take advantage of separate copy engines.

Each engine mutex prioritizes requests in FIFO order. Blocked jobs suspend while waiting for an engine. A job that holds an engine lock may inherit the priority of any job it blocks. Priority inheritance relations from the R^{2}DGLP may propagate to an engine holder to ensure timely real-time scheduling. A job releases an engine lock once all of its engine-related operations (e.g., GPU kernel execution or memory copy) complete. In order to reduce worst-case blocking, a job is allowed to hold at most *one* engine lock at a time, *except* during P2P migrations. Engine locks enable the parallelism offered by GPUs to be utilized while simultaneously obviating the need for the (unpredictable) GPU driver to make resource arbitration decisions.

4.2 Migrations

GPUSync supports both P2P and system memory migrations. The rules governing each type of migration differ.

P2P migrations. When migrating from GPU$_a$ to GPU$_b$, a job must hold copy engine locks for both GPU$_a$ and GPU$_b$. As shown in the full version of this paper [11], if these locks are acquired separately, then worst-case blocking grows quadratically with respect to the total number of GPU tokens. We avoid such excessive blocking by instead using *dynamic group locks* (*DGLs*) [26]. Using DGLs, a job atomically requests *both* copy engine locks simultaneously.

A job may issue memory copies to carry out migration once both engine locks are held. This isolates migration traffic to the PCIe bus: copied data does not traverse the high-speed processor interconnect or system memory buses—computations utilizing these interconnects are not disturbed.

[9]It is possible to use affinity-aware heuristics to estimate queue length in terms of time instead of number of requests. Such heuristics can improve average-case performance while maintaining real-time predictability. Due to space constraints, we do not consider such heuristics further.

System memory migrations. Migrations through system memory are also supported by GPUSync. Such migrations are performed *speculatively*, i.e., migrations are always assumed to be necessary. Thus, state data is aggregated with input and output data. State is always copied off of a GPU after per-job GPU computations have completed. State is then copied back to the next GPU used by the task for the subsequent job if a different GPU is allocated. An advantage of this approach over P2P migrations is that a job never has to hold two copy engine locks at once. This reduces lock contention and may improve blocking bounds, depending upon system and task set parameters.

Speculative migrations may seem heavy handed, especially when migrations between GPUs may not always be necessary. Instead, an "on demand" approach could be taken where each migration forces data to be copied off of the previously-allocated GPU to system memory and then to the newly-allocated GPU. However, this method offers no analytical real-time benefits over P2P migrations and would likely increase interconnect contention.

4.3 Memory Copy Routines

Recall from Sec. 2 that GPU copy engines perform operations non-preemptively, and large memory transactions can cause tasks to experience long periods of blocking. Prior work has shown that response times can be improved if these large copy operations are broken up, or chunked, into smaller ones [15, 16]. We adopt this method. Chunking is implemented via user-space memory copy APIs. The programmer specifies the source, destination, and amount of memory to be copied. The copy is carried out incrementally in configurable chunk sizes. The API also automatically acquires the necessary copy engine locks before copying each chunk.

5 Analysis

For completeness, we now present a coarse analysis of blocking under GPUSync. Our main purpose here is to expose analytical differences among various configurations of GPUSync. Fine-grained blocking analysis can be found in [11]. We make the simplifying assumption that each job of any task competes for a GPU token at most once.

We assume that the tasks utilizing GPUSync execute globally on m CPUs (perhaps a cluster or the entire system) and compete for access to g GPUs. Each task T_i is an implicit-deadline sporadic task specified by a tuple $(e_i, c_i, p_i, N_i^I, N_i^O, N_i^S, N_i^K, K_i)$. p_i is the minimum job separation parameter for T_i. The other terms are defined by focusing on an arbitrary job J_i of T_i. e_i (c_i) bounds the amount of CPU execution time J_i receives outside (inside[10]) a token critical section. N_i^I, N_i^O, and N_i^S bound the number of data chunks making up J_i's GPU input, output, and state, respectively. N_i^K bounds the number of GPU kernels issued by J_i, each of which executes for at most K_i time (the CPU execu-

[10]The CPU may execute control logic during GPU computations.

tion time required to dispatch a kernel assumed negligible).

We now present various blocking-related notation. Let C_i denote the maximum token critical section length of T_i, b_i^C denote the maximum time J_i may be blocked while waiting for a token, and b_i^E denote the maximum time J_i may be blocked *within* a token critical section for *all* engine locks. Then, the maximum time a job may be blocked accessing locks *and* tokens is give by $b_i \triangleq b_i^C + b_i^E$. Let X^I, X^O, and X^{P2P} denote the maximum time it takes to transmit a chunk of GPU data for input, output, and P2P migration, respectively, and let X^{max} denote the maximum of X^I, X^O, and X^{P2P}. Also, let S_i denote the maximum time to perform a GPU migration. For P2P migrations, $S_i = X^{P2P} N_i^S$. For migrations through system memory, $S_i = X^I N_i^S + X^O N_i^S$. $S_i = 0$ when GPUs are partitioned (no migrations). Let K^{max} denote the longest duration an execution engine lock is held by any other task, and let C^{max} denote the longest token critical section among all tasks.

A job must first acquire a token from the GPU allocator before it can begin using a GPU. This allocator uses the R^{2}DGLP to control access to ρg tokens. Using the blocking analysis presented in [28] for the R^{2}DGLP, a token-requesting job is blocked by at most $2\lceil m/(\rho g)\rceil - 1$ token critical sections of other jobs. Thus, the total duration of blocking while waiting for a token is bounded by $b_i^C = C^{max}(2\lceil m/(\rho g)\rceil - 1)$. Bounds on C^{max} must be computed since tasks may block while acquiring engine locks. By construction, the token critical section length for T_i is $C_i = c_i + b_i^E + X^I N_i^I + X^O N_i^O + K_i N_i^k + S_i$. All parameters for this equation have been derived, except for b_i^E.

b_i^E is the sum of all blocking experienced within the token critical section. Let b_i^K denote J_i's maximum total blocking time for the execution engine lock, let $b_i^{I/O}$ denote its maximum total blocking time while waiting to transmit input and output chunks, and let b_i^{P2P} denote its maximum total blocking time while waiting for copy engines locks to perform a P2P migration. Then, $b_i^E = b_i^K + b_i^{I/O} + b_i^{P2P}$.

A job may be blocked for every GPU kernel it executes when acquiring the execution engine lock of its allocated GPU. At most $\rho - 1$ other jobs at a time may compete for this lock for a given request. Since requests are FIFO ordered, the resulting blocking is bounded by $b_i^K = (\rho - 1)K^{max}$.

Bounds for $b_i^{I/O}$ and b_i^{P2P} depend on whether migrations are P2P or through system memory and on the number of copy engines per GPU. In our analysis, we assume that all migrations are supported using the same mechanism, though in practice GPUSync could support both types in the same system. Due to space constraints, we only present blocking analysis for GPUs with *one* copy engine here. (Analysis for GPUs with two copy engines is available in [11].)

Copy engine blocking with P2P. Under P2P migrations, any task holding a GPU token may request the copy engine lock of the GPU it used in its prior job in order to perform a migration. There are ρg such tasks. In the worst-case, they may all attempt to access the same copy engine lock at the same instant. Thus, *any* request for a copy engine lock may be blocked by $\rho g - 1$ other requests. From the blocking analysis of DGLs [26], the total number of blocking requests for the copy engine is at most $(\rho g - 1)$. Since no task requires more than X^{max} time to complete $b_i^{I/O} = ((\rho g - 1)X^{max})(N_i^I + N_i^O)$ and $b_i^{P2P} = ((\rho g - 1)X^{max})N_i^S$.

Copy engine blocking with system memory migration. In this case, copy engines are only accessed by tasks that have been given a token for an allocated GPU, so at most $\rho - 1$ other jobs may compete for the copy engine lock at a given instant. Recall that state is aggregated with input and output data. Thus, $b_i^{P2P} = 0$. However, now $b_i^{I/O} = ((\rho - 1)X^{max})(N_i^I + N_i^O + 2N_i^S)$ since state data must be handled twice.

Note the analytical differences between P2P migrations and system memory migrations. In the case of P2P migrations, copy engine lock contention is $O(\rho g)$, which results in $O(m)$ blocking total when including token blocking, while in the case of system memory migrations, copy engine lock contention is is $O(\rho)$, which results in $O(m/g)$ total blocking. Despite its inferior order of complexity, P2P migration may still result in better analytical bounds if the advantages of fewer and faster memory copies can be exploited (it is faster because state is not copied to memory). Furthermore, there are benefits to P2P migrations that cannot be captured in the above analysis, namely, isolation from the system memory bus and improved average-case performance.

Number of per-GPU tokens. We conclude this section by discussing trade-offs in selecting ρ. If ρ is small, then b_i^C is large and b_i^E is small. The converse is true if ρ is large. What value for ρ should be used? Is there a balance between b_i^C and b_i^E to be made? Analytically speaking, the ρ term often cancels out between b_i^C and b_i^E. However, this is not always the case due to the ceiling taken when computing b_i^C. In practice, ρ should only be great enough to keep GPU resources busy while maintaining acceptable blocking bounds.

6 Experimental Results

In this section, we assess trade-offs in the design choices affecting GPUSync by presenting the results of overhead-aware schedulability studies. We also discuss experiments involving real-time computer vision workloads. To obtain the overhead information needed in our schedulability study, we implemented GPUSync in LITMUS$^{\mathrm{RT}}$ [5][11] and measured various overheads while executing workloads devised to expose worst-case scenarios. We then incorporated these overheads into schedulability experiments. We also used our LITMUS$^{\mathrm{RT}}$ implementation for the computer vision study. These experimental efforts are discussed in detail next.

6.1 Overhead Measurements

Our implementation of GPUSync was run on a test platform much like that in Fig. 2. This platform has two "nodes,"

[11] Source code is available at `www.litmus-rt.org`.

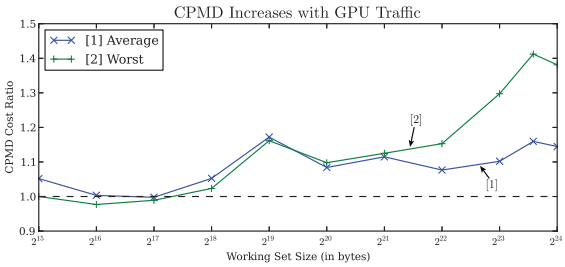

Figure 5: CPMD cost increase with GPU traffic.

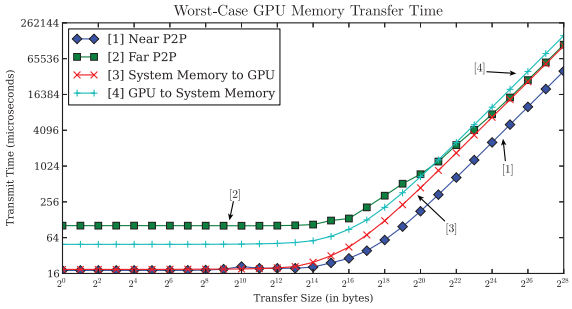

Figure 6: Worst-case GPU memory transmission times.

each with one Xeon X5060 processor with six 2.67GHz cores and four closely connected NVIDIA GTX-470 GPUs. Within each node, we used EDF scheduling globally and either pooled GPUs or statically assigned them to cores. We used a CUDA 5.0 for our GPGPU runtime environment.

Relevant overheads include those of an algorithmic nature and those related to memory accesses. *Algorithmic overheads* include: thread context switching, scheduling, job release queuing, inter-processor interrupt latency, CPU clock tick processing, and GPU interrupt processing. We measured these overheads by using light-weight tracing techniques while executing workloads that stress the various hardware components managed by GPUSync.[12]

Memory overheads reflect lost capacity due to cache affinity loss and GPU memory transfer rates. These overheads are dependent on the interleaving of memory accesses by different tasks and thus are more difficult to measure. Cache affinity loss manifests as *cache preemption/migration delays* (*CPMDs*) [3, 4], which reflect the increased execution time of a task needed to repopulate caches after it is preempted or migrated. Overheads due to GPU memory traffic, called *GPU memory traffic delays* (*GMTDs*), affect the rate at which GPU memory copies can be executed. CPMDs and GMTDs are interrelated because CPUs and GPUs share the system memory bus. This interrelation has not been fully considered in prior work in which CPMDs or GMTDs were measured [3, 4, 15]. We account for this interrelation by stressing buses with respect to both GPU and CPU traffic simultaneously. We now describe our CPMD and GMTD measurement process in more detail and discuss a subset of the measurement results presented in full in [11].

Measuring CPMDs. We measured CPMDs using methods described in [3, 4], extended to include the effects of GPU memory traffic. Specifically, a test thread that performs memory operations was executed in the presence of "cache-polluting" threads that cause cache evictions and heavy system memory bus load, and additional threads that copy data between GPUs and system memory. The test thread periodically sleeps and migrates among CPUs to simulate preemptions and migrations. CPMDs were computed by comparing the execution time of a sequence of read/write operations upon data of a given *working set size* (*WSS*) in the presence and absence of preemptions and migrations. CPMDs are sensitive to read:write ratios; to keep our study tractable, we limited attention to a read:write ratio of 3:1. Many thousands of samples are required for good measurements.

Fig. 5 shows the relative increase in CPMDs we observed in the presence of GPU traffic on the system memory bus. The cost increase is depicted as a ratio of CPMDs with GPU traffic to CPMDs without GPU traffic. CPMDs increased between 10% and 20% for average-case measurements, and up to 40% for worst-case measurements.

Measuring GMTDs. GMTDs were measured in the presence of system memory bus load caused by CPU cache polluters. GPU bus polluters were also executed to stress the PCIe bus. A test thread then performed GPU memory copies of various sizes. Memory pages were pinned so that memory copies would be exempt from page faults and be as fast as possible. Measurements for sending, receiving, and performing P2P memory copies were made.

Fig. 6 illustrates the measured times; note that both axes are on a base-2 logarithmic scale. *Far* (*near*) P2P copies are between GPUs with a distance of two (one). Note that far P2P copies take only slightly longer than copies between system memory and GPUs. However, near P2P copies take less than half the time of any other copy method for copies 256KB or greater in size—reduced bus contention is a clear win. Note also that small memory copies (4K or less) take roughly the same time within (but not among) each copy method, indicating that fixed-cost overheads dominate for small copies, though these overheads differ for each type of copy. These fixed costs gradually have less of an effect between 8K to 256K, after which transmit times scale linearly with data size. This implies that chunk sizes should at least be 256K to minimize overhead-related utilization loss.

Fig. 7(a) shows the relative increase in *worst-case* GPU memory copy times we observed in the presence of CPU traffic on the system memory bus. There are some surprising results. First, there appears to be an anomaly for near P2P copies of 512B, where worst-case transmissions are actually faster with CPU traffic. Another surprise is that the worst-case system-memory-to-GPU transfer time for *small* transfers is also faster with CPU traffic. Both anomalies per-

[12] As is done in [3, 4] and suggested by the US National Institute of Standards and Technology [22], we used an interquartile range filter to remove outliers in all measurements that can be affected by non-deterministic events such as interrupt handling since these events introduce measurement errors.

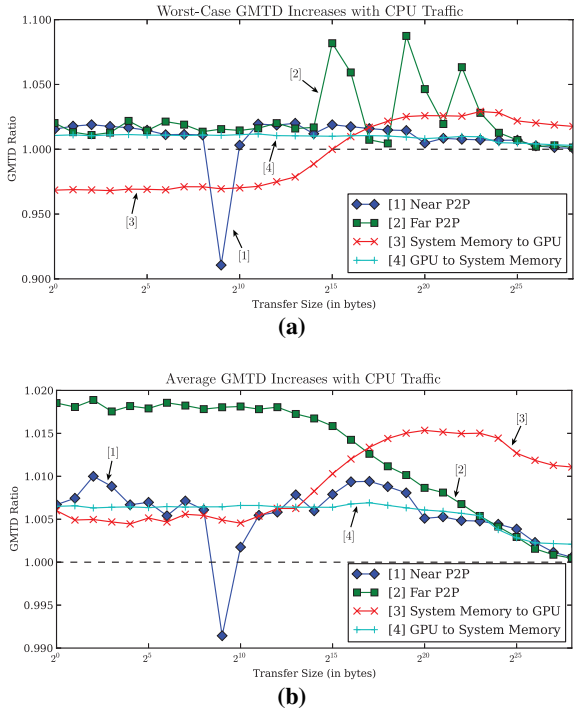

Figure 7: **(a)** Worst-case and **(b)** average GMTD cost increase with CPU system bus traffic.

sisted across many trials, so additional investigation is merited. These anomalies may be due to behaviors within the closed-source GPU driver that are difficult to discern. In any event, the time-scale of these transfer times is less than 32µs so they are of little practical impact. Also, when we examine the relative increase in *average* GPU memory copy times in Fig. 7(b), we see that system-memory-to-GPU copy times do increase, as expected. Despite these anomalies, our data indicates that GMTDs rarely increase by more than 5% in the worst case, and less than 2% in the average case. Thus, this data suggests that GMTDs, unlike CPMDs, are not strongly affected by system memory traffic from the CPUs.

6.2 Schedulability Experiments

We evaluated GPUSync with overhead-aware schedulability tests to better understand the real-time properties of GPUSync and trade-offs in design choices. We randomly generated task sets of varying characteristics and tested them for SRT schedulability using the methods described in [12]. We now describe the experimental process we used.

Experimental setup. There is a wide space of task set and system configuration parameters to explore. Task set parameters include: task set utilization distribution, task set period distribution, CPU cache WSS distribution, number and duration of GPU kernels, size of per-job GPU input and output data, size of task state stored in GPU memory, GPU memory transmission chunk size, the critical section length of the GPUSync token, and the ratio of GPU-using tasks to CPU-only tasks. System configuration parameters include: the number of GPU tokens, migration method used, and GPU cluster configuration. In order to keep our study tractable, we kept several of these parameters constant and allowed others to vary between (what we believe to be) realistic real-world bounds for the automotive systems discussed earlier. For example, task periods were uniformly distributed in the range [33ms, 100ms], reflecting the sensor rates of video cameras and LIDAR detectors found in advanced vehicle prototypes [14]. Due to page constraints, we cannot fully describe the full range of task set parameters here and refer the reader to [11] for details. We merely state that each unique permutation of parameters yields a single *task set scenario*, and that there were 360 task set scenarios in total.

Each task set scenario was combined with several *system configurations*, assuming a platform like our test platform (as illustrated in Fig. 2). System configurations varied in ρ, chunk size, and CPU/GPU organization. GPU management methods using GPUSync with P2P migrations, GPUSync with migrations through system memory, and exclusive GPU allocation through a R^{2}DGLP k-exclusion lock were also tested. Each permutation of these parameters resulted in a unique system configuration, for a total of 54 system configurations. Task set scenarios and system configurations were combined and then tested under both average- and worst-case overhead assumptions, for a total of 38,880 experiments. We generated task sets for each experiment with task set utilizations ranging from (0, 12], capturing the possible system utilizations on our test platform. Each task set was partitioned using a two-pass, worst-fit, heuristic that first partitioned GPU-using tasks among GPU clusters and associated CPU clusters in one pass, and then partitioned CPU-only tasks in another. Schedulability for bounded tardiness was then tested. Blocking terms were computed using *fine-grained* analysis from [11] (in contrast to the coarse-grained analysis in Sec. 5). Enough task sets were tested for each experiment to generate smooth schedulability curves; this came to roughly 400,000 task sets per experiment.

Results. Our schedulability results are given in full in [11]. Key observations following from these results are stated below and supported using representative graphs that compare different GPUSync settings in terms of *schedulability* (the fraction of generated task sets deemed schedulable). In the presented graphs, "P2P" denotes P2P migrations, "System memory" denotes system memory migrations, and "Exclusive alloc." denotes exclusive allocation using the R^{2}DGLP to arbitrate access to the GPU as a whole.

Obs. 1. When tasks' state sizes are large, P2P migrations offer better schedulability, despite greater worst-case copy engine contention. When the state size is small, such contention leads to worse schedulability.

In Fig. 8, we observe that when each task's state is 64MB (curves 3 and 4), GPUSync with P2P migrations has better schedulability than exclusive GPU allocation. However, when the state size is only 4MB, GPUSync with memory migrations (curves 1 and 2) has better schedulability

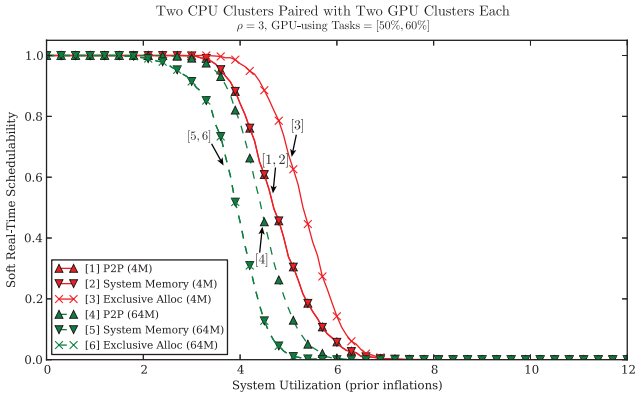

Figure 8: Effect of state size on schedulability.

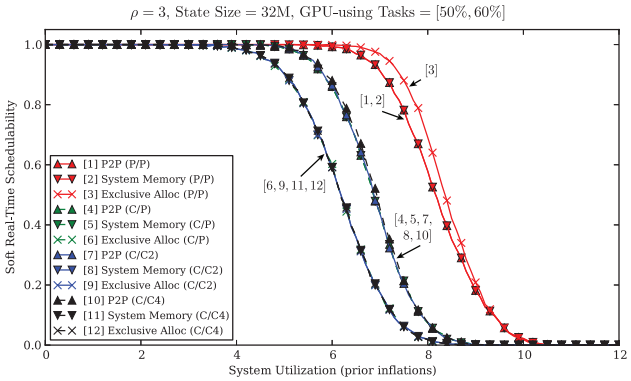

Figure 9: Effect of organizational method on schedulability.

than P2P migrations. Recall from Sec. 5 that P2P migrations cause $O(m)$ blocking, while memory migrations only cause $O(m/g)$ blocking. The increased asymptotic blocking in the case of P2P migrations is offset by the improved bus contention and therefore transfer times of migrations. However, when the state size is small, such gains do not offset increased blocking bounds.

Obs. 2. Schedulability of fine-grained locking meets or exceeds that of coarse-grained locking when state sizes are large. However, the parallelism afforded by this approach can have a negative effect on schedulability when state size is small. In either case, we expect improved average-case response times in practice.

This can also be seen in Fig. 8, where the curve for system memory migration (5) and exclusive GPU locking (6) overlap. Given that coarse- and fine-grained locking are comparable for applications with larger state sizes, from a schedulability point of view, it makes sense to employ fine-grained locking in practice to improve average-case response times, as will be discussed later.

Obs. 3. ρ does not significantly impact schedulability, but larger values of ρ support more average-case parallelism.

Due to space constraints, we omit a graph demonstrating this observation since schedulability curves are nearly indistinguishable among tested values of ρ. However, such graphs are available in [11]. In our experiments, we only tested $\rho \in \{1, 2, 3\}$ because larger values negatively impact blocking when applying fine-grained analysis. Our results do however suggest that ρ can be set to the number of engines per GPU. This allows copy and execute engines to be used concurrently, which can improve average-case response times.

While comparing different organizational methods is not the focus of this paper, we note the following.

Obs. 4. Regarding the clustering of GPUs, schedulability is generally better with a cluster size of one (partitioning) and is similar for other cluster sizes.

This observation is supported by Fig. 9. In this figure, curves 4, 5, 6; 7, 8, 9; and 10, 11, 12 depict a system in which the six CPUs on one node form a cluster and the four GPUs on that node are organized, respectively, in four clusters of size one (partitioned), two clusters of size two, and one cluster of size four. Curves 1, 2, and 3 depict a partitioned system, in which both GPUs and CPUs are partitioned; each GPU is mapped to a single processor, and tasks cannot migrate among processors. In the partitioned case, four processors host tasks that cannot access any GPU.

We believe that different non-unit cluster sizes exhibit similar schedulability because migration data is only part of a job's use of the copy engines—there is also input and output data. Additionally, as is seen in Fig. 7, the difference in transfer times between near and far migrations is small. GPU partitioning avoids these migration costs. However, partitioning approaches are subject to capacity loss on account of bin-packing-related issues, and may not be as responsive as systems in which migrations are allowed.

6.3 Real-Time Vision Workloads

We now describe the vision-related experiments mentioned earlier. In these experiments, we adapted a freely-available CUDA-based feature tracking program to GPUSync on LITMUS$^{\mathrm{RT}}$ [24].[13] Feature tracking is an important application in automotive systems (our motivating application) that sense and monitors the environment. The tracker represents a scheduling challenge since it utilizes both CPUs and GPUs to carry out its computations. Though feature tracking is only one GPGPU application, its image processing operations are emblematic of many others.

We stressed the system by applying featuring tracking to many independent video streams simultaneously, each with 320x240 resolution. Each video stream was handled by one task, with each frame being processed by one job. Tasks were partitioned between the two NUMA nodes of our system.

Frames were preloaded into memory in order to avoid disk latencies (such latencies would be non-existent with real video cameras). All data was page-locked in system memory to facilitate fast and deterministic memory operations. Memory copies for input and output data between system

[13] Source code available at `www.litmus-rt.org`.

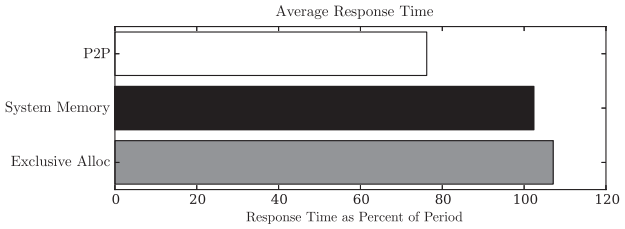

Figure 10: Observed response times under GPUSync

and GPU memory was roughly 1MB per frame, combined. However, task state data was about 6.5MB in size.

We let $\rho = 2$, and tested P2P and system memory migrations and exclusive GPU arbitration. We used a chunk size of 2MB for the P2P and system memory migrations (chunking is not necessary under exclusive GPU arbitration).

Measurements of job response times were made within a five minute execution window. Response times, as a *percent of period*, were averaged and are plotted in Fig. 10. Note that P2P migrations improve average-case response times rather significantly over either exclusive GPU arbitration, or system memory migrations. These results, together with those of the prior section, suggest that our techniques for managing parallelism can improve average-case responsiveness without compromising predictablility.

7 Conclusion

We have presented GPUSync, a GPU management framework that can be flexibly applied under different real-time schedulers to manage GPU-related resources in multi-GPU muticore systems. GPUSync's design leverages recently developed asymptotically optimal multiprocessor real-time locking protocols to manage GPU-related resources that can be accessed in parallel. While we have focused on certain scheduler and synchronization-protocol choices, variants of GPUSync can be applied assuming other choices. In fact, GPUSync enables schedulability to be assessed in a parallelism-cognizant way for all of the CPU/GPU allocation categories reflected in Fig. 1. Using these results, we next intend to conduct an overhead-aware schedulability study in which all of these categories are compared.

References

[1] CUDA Zone. `http://www.nvidia.com/object/cuda_home_new.html`.

[2] B. Andersson, G. Raravi, and K. Bletsas. Assigning real-time tasks on heterogeneous multiprocessors with two unrelated types of processors. In *31st RTSS*, 2010.

[3] A. Bastoni. *Towards the Integration of Theory and Practice in Multiprocessor Real-Time Scheduling*. PhD thesis, Univ. of Rome, 2011.

[4] B. Brandenburg. *Scheduling and Locking in Multiprocessor Real-Time Operating Systems*. PhD thesis, Univ. of North Carolina at Chapel Hill, 2011.

[5] J. Calandrino, H. Leontyev, A. Block, U. Devi, and J. Anderson. LITMUS^{RT}: A testbed for empirically comparing real-time multiprocessor schedulers. In *27th RTSS*, 2006.

[6] J. Correa, M. Skutella, and J. Verschae. The power of preemption on unrelated machines and applications to scheduling orders. In *12th APPROX and 13th RANDOM*, 2009.

[7] G. Elliott and J. Anderson. An optimal k-exclusion real-time locking protocol motivated by multi-GPU systems. In *19th RTNS*, 2011.

[8] G. Elliott and J. Anderson. Real-world constraints of GPUs in real-time systems. *17th RTCSA*, 2, 2011.

[9] G. Elliott and J. Anderson. Building a real-time multi-GPU platform: Robust real-time interrupt handling despite closed-source drivers. In *24th ECRTS*, 2012.

[10] G. Elliott and J. Anderson. Globally scheduled real-time multiprocessor systems with GPUs. *Real-Time Systems*, 48, 2012.

[11] G. Elliott, B. Ward, and J. Anderson. GPUSync: A framework for real-time GPU management (full version). `http://www.cs.unc.edu/~anderson/papers.html`, 2012.

[12] J. Erickson, U. Devi, and J. Anderson. Improved tardiness bounds for Global EDF. In *22nd ECRTS*, 2010.

[13] M. Green. "How long does it take to stop?" Methodological analysis of driver perception-brake times. *Transportation Human Factors*, 2(3), 2000.

[14] F. Homm, N. Kaempchen, J. Ota, and D. Burschka. Efficient occupancy grid computation on the GPU with LIDAR and radar for road boundary detection. In *Intelligent Vehicles Symposium*, 2010.

[15] S. Kato, K. Lakshmanan, A. Kumar, M. Kelkar, Y. Ishikawa, and R. Rajkumar. RGEM: A responsive GPGPU execution model for runtime engines. In *32nd RTSS*, 2011.

[16] S. Kato, M. McThrow, C. Maltzahn, and S. Brandt. Gdev: First-class GPU resource management in the operating system. In *USENIX ATC*, 2012.

[17] J. S. Kim, M. Hwangbo, and T. Kanade. Realtime affine-photometric KLT feature tracker on GPU in CUDA framework. In *12th ICCV Workshop*, 2009.

[18] M. Lalonde, D. Byrns, L. Gagnon, N. Teasdale, and D. Laurendeau. Real-time eye blink detection with GPU-based SIFT tracking. In *Canadian Conf. on Computer and Robot Vision*, 2007.

[19] PCI-SIG. *PCIe Base 3.0 Specification*, 2010.

[20] R. Pellizzoni. *Predictable and Monitored Execution for COTS-based Real-Time Embedded Systems*. PhD thesis, Univ. of Illinois at Urbana Champaign, 2010.

[21] C. J. Rossbach, J. Currey, M. Silberstein, B. Ray, and E. Witchel. PTask: operating system abstractions to manage GPUs as compute devices. In *23rd SOSP*, 2011.

[22] S. Thrun. e-handbook of statistical methods. `http://www.itl.nist.gov/div898/handbook/`, 2010.

[23] S. Thrun. GPU Technology Conf. Keynote, Day 3. `http://livesmooth.istreamplanet.com/nvidia100923`, 2010.

[24] C. Tomasi and T. Kanade. Shape and motion from image streams under orthography: A factorization method. *J. of Computer Vision*, 9(2), 1992.

[25] Y. Wang and J. Kato. Integrated pedestrian detection and localization using stereo cameras. In *Digital Signal Processing for In-Vehicle Systems and Safety*. 2012.

[26] B. Ward and J. Anderson. Nested multiprocessor real-time locking with improved blocking. in submission.

[27] B. Ward and J. Anderson. Supporting nested locking in multiprocessor real-time systems. In *24th ECRTS*, 2012.

[28] B. Ward, G. Elliott, and J. Anderson. Replica-request priority donation: A real-time progress mechanism for global locking protocols. In *18th RTCSA*, 2012.

A Blocking Analysis

In this appendix, we present the following: (1) proof for the claim made in Sec. 4 that if copy engine locks are acquired separately for P2P copies, worst-case blocking grows quadratically with respect to the total number of GPU tokens; (2) coarse-grain blocking analysis for GPUs with two copy engines; and (3) fine-grain blocking analysis for systems with one copy engine.

A.1 Quadratic Blocking Without DGLs

If copy engine locks for P2P migrations are acquired via separate, nested requests, as may be done using traditional approaches, the worst-case blocking a task may experience is quadratic with respect to the total number of GPU tokens, ρ.

Lemma 1. *If tasks may require multiple copy engines concurrently, and such requests are satisfied via separate requests, a job holding GPU token a can be blocked by at most $(\rho g - 1)(\rho g - 2)/2$ requests per outermost copy engine request.*

Proof. Consider the pathological worst case scenario in which a request is enqueued behind $\rho g - 1$ other requests for a copy engine of GPU_a. Because there can be at most ρg total requests for any same copy engine, if the i^{th} request in the queue for a copy engine of GPU_a issues a nested request, there may be at most $i - 1$ other requests enqueued ahead of it (directly or transitively) after it issues its nested request. Thus the total number of blocking requests is $\sum_{i=1}^{\rho g}(i-1) = (\rho g - 1)(\rho g - 2)/2$. □

Theorem 1. *If tasks may require multiple copy engines concurrently, and such requests are satisfied via separate requests, $b_i^{P2P} = O(\rho^2 g^2)$.*

Proof. By Lemma 1, a task that requests copy engine locks through separate requests may be blocked by $(\rho g - 1)(\rho g - 2)/2$ other requests. A task makes N_i^S requests per migration. Thus, $b_i^{P2P} = ((\rho g - 1)(\rho g - 2)/2)X^{max}N_i^S = O(\rho^2 g^2)$. □

By Theorem 1, worst-case blocking grows quadratically with respect to ρ, when copy engine locks for P2P migrations are acquired via separate requests.

A.2 Coarse-Grain Analysis For Two Copy Engines

Here we present coarse-grain analysis similar to that presented in Sec. 5 for GPUs with two copy engines. As noted in Sec. 4, there is some flexibility in how these copy engines may be used. The copy engines may be managed in one of two ways. Under the first management scheme, one copy engine may be reserved for P2P operations while the remaining engine is used for *both* inbound and outbound data transmission. Under the second scheme, one copy engine may be reserved for outbound data transmissions and the other for inbound data transmissions. The appropriate locks would then be acquired via DGLs to perform P2P migrations.

We term the first scheme as the *isolated engine* (IE) approach since engines used for data and state transmission are isolated from one another. We term the second scheme as the *isolated bus* (IB) approach since the copy engines are guaranteed to operate in opposing directions on the full-simplex PCIe bus; that is, one engine always sends data and the other always receives data. We show here that IE offers better worst-case blocking behavior than IB. However, we speculate that IB may offer better behavior in the average-case, if state sizes are sufficiently small, due to reduced bus contention. Unfortunately, we are unable to confirm this speculation since GPUs with two copy engines were unavailable to us.

The availability of two copy engines per GPU does not affect the kernel blocking time, b_i^K, already derived in Sec. 5. However, we must revisit the derivations for $b_i^{I/O}$ and b_i^{P2P}.

Isolated engine (IE) approach. Under IE, each copy engine on the same GPU may both send or both receive data at the same time. Thus, each copy engine may share the PCIe bus link with the other in the worst-case. The available bandwidth to each engine is thus $1/2$ the normal bandwidth due to PCIe's round-robin scheduling of data packets [19]. Hence, we assume transmission times are doubled under IE, without available hardware for testing.

At most $\rho - 1$ other jobs that may compete for the inbound/outbound copy engine lock at a given instant. Thus, $b_i^{I/O} = (\rho - 1)(2\max(X^I, X^O))(N_i^I + N_i^O)$. However, at most $\rho g - 1$ other jobs may complete for the P2P migration copy engine lock at a given instant, so $b_i^{P2P} = (\rho g - 1)(2X^{P2P})N_i^S$. While we double the time it takes to transmit a data chunk due to increased bus contention, note that X^{max} does not appear in these formulas, so IE is able to take advantage of faster P2P memory copies, analytically.

Isolated bus (IB) approach. Under IB, the copy engines of a GPU are guaranteed to operate in opposite directions, so we may assume no bus contention at the lowest level of the PCIe bus hierarchy. However, now any task with a GPU token can potentially request any copy engine lock, since migrating tasks may request both inbound and outbound locks. However, since inbound and outbound traffic is now isolated on the bus, we may split $b_i^{I/O}$ into component terms b_i^I and b_i^O such that $b_i^{I/O} = b_i^I + b_i^O$. We derive these component terms separately.

At most $\rho g - 1$ other jobs may compete for an inbound copy engine lock at a given instant when a job needs a copy engine to send input data. No blocking request takes more than $\max(X^I, X^{P2P})$ time to complete, so $b_i^I = (\rho g - 1)\max(X^I, X^{P2P})N_i^I$. Likewise, at most $\rho g - 1$ other jobs may compete for an outbound copy engine lock at a given instant when a job needs a copy engine to copy back output data. No blocking request takes more than $\max(X^O, X^{P2P})$ time to complete, so $b_i^O = (\rho g - 1)\max(X^O, X^{P2P})N_i^O$.

Similar to P2P copies with GPUs with a single copy en-

gine, the total number of blocking requests for the copy engine is at most $(\rho g - 1)$. Since no task requires more than X^{max} time to complete, so $b_i^{P2P} = (\rho g - 1)X^{max}N_i^S$.

System memory migrations under IB. System memory migrations only make sense in the context of the IB approach. There is no reason to reserve a copy engine for P2P transmissions if P2P migrations are not used. As before, we may split $b_i^{I/O}$ into component terms b_i^I and b_i^O. We can simply derive formulas using the reasoning above and in Sec. 5: $b_i^I = (\rho - 1)X^I(N_i^I + N_i^S)$, $b_i^O = (\rho - 1)X^O(N_i^O + N_i^S)$, and $b_i^{P2P} = 0$.

The derivation for $b_i^{I/O}$ under IB is very similar to system memory migrations using a single GPU. The only difference is the finer use of X^I and X^O instead of the generalized X^{max}. However, it was shown in Sec. 6 that the disparity between X^I and X^O is not great. Thus, it appears that there is little *analytical* advantage to having two copy engines per GPU when migrations through system memory are used. Of course, average-case performance is likely to be greater in practice when two copy engines are available.

This concludes our derivation of coarse-grain blocking bounds for GPUs with two copy engines. We remark that there are trade-offs between IE and IB approaches. Worst-case blocking under IE is asymptotically less than IB. However, we must assume that transmissions take twice as long due to bus contention. Still, if we consider applications where GPU-using tasks have no/little state or GPUs are partitioned, IB is clearly the better approach—there is little sense in reserving a copy engine for P2P migrations if that engine is significantly underutilized. This implies that there may be a break-even point, both analytically and in practice, between the two approaches. Further study is necessary to better understand the trade-offs between IE and IB.

A.3 Fine-Grain Analysis

We now present fine-grain blocking analysis for GPUs with one copy engine. As just noted above, further study of GPUs with two copy engines is merited, so we defer fine-grain analysis for GPUs with two copy engine to future work.

The coarse-grain analysis in Sec. 5 assumed generalized worst-case conditions for all blocking computations. While fine-grain analysis also assumes worst-case conditions, it derives less pessimistic worst-case conditions from the interrelations between specific tasks. This results in less pessimistic blocking bounds and improves schedulability. This fine-grain analysis technique is based upon that found in [4].

We first describe the fine-grain analytical process and later derive the detailed formulas that are plugged into this process. For task T_i, we first determine the *number* of jobs of another task, T_j where $i \neq j$, that may be ready to run at the same time as J_i. This is characterized by the *task interference function*, *tif*(T_i, T_j). From *tif*(T_i, T_j), we generate a set of interfering resource requests that the interfering jobs $J_{j,v}$ may make when J_i requests a resource of the same *type*, where *type* may be GPU token, execution engine lock, or copy engine lock. This set is generated by the *request interference function*, *xif*(T_i, T_j, R_k), where R_k is a given resource. We aggregate the set of interfering requests of all tasks (excluding T_i) into a single set of *all* interfering resource requests that may be made, as given by the *total request interference function*, *txif*(T_i, R_k).

Each interfering request, Q_j, has an associated blocking length, $l_j \triangleq |Q_j|$. For example, a copy engine lock may be held for at most X^{max} time units (as ensured by priority inheritance), so $l_j = X^{max}$ for such a copy engine request. The set defined by $\mathcal{S}_{i,k} \triangleq$ *txif*(T_i, R_k) is *sorted* in descending order by blocking length. To compute the blocking experienced by J_i for a given single resource request, the top y blocking requests are removed from $\mathcal{S}_{i,k}$, depleting $\mathcal{S}_{i,k}$ by y requests, and summed. This process is repeated iteratively for each request of a given type made by J_i until $\mathcal{S}_{i,k}$ is empty. In general, the value of y depends upon the locking protocol used and resource organization. For example, under GPUSync, $y = (\rho g - 1)$ for copy engine lock requests when P2P migrations are used. This is derived directly from the coarse-grain analysis given in Sec. 5.

This entire process must be repeated for each type of resource: GPU token, execution engine lock, copy engine lock.

In the case of soft real-time scheduling, *tif*(T_i, T_j) depends upon tardiness bounds, which in turn depend upon blocking bounds. A fixed-point iterative method must then also be used ensure schedulability, outlined by the following steps: (1) initialize tardiness bounds to zero; (2) compute blocking bounds; (3) compute tardiness bounds; (4) compute new blocking bounds; (5) check schedulability, if schedulable but new blocking bounds from step (4) differ from bounds previously computed, go back to step (3). This method will terminate when either blocking bounds have reached a steady state or the task set is unschedulable.

Before proceeding, we make two assumptions. First, we assume that the total number of GPU-using tasks is greater than g; otherwise, the GPU allocator (as implemented by the modified R^{2}DGLP) load-balances GPU token requests such that no two tasks share a GPU *and* that each task always receives the same GPU for every job—there is no blocking or migration under this scenario. Second, we assume that a GPU-using tasks only requests a GPU token once per job. The following analysis can be extended to handle multiple token requests per job, though it becomes cumbersome to express.

We now proceed to define the above formulas for the various resource types.

Def. 1. For hard real-time systems,

$$\textit{tif}(T_i, T_j) \triangleq \left\lceil \frac{p_i + rt_j}{p_j} \right\rceil, \tag{1}$$

where rt_j is the worst-case response time of a job of T_j [4].

Def. 2. For soft real-time systems (under the "bounded tar-

diness" definition of soft real-time),

$$\mathit{tif}(T_i, T_j) \triangleq \left\lceil \frac{p_i + x_i + p_j + x_j}{p_j} \right\rceil, \tag{2}$$

where x_i and x_j denote tardiness bounds of job completion for tasks T_i and T_j, respectively [10].

tif(T_i, T_j) gives us the number of jobs of T_j that may interfere with a job J_i. We now derive the set of requests from T_j that may interfere with requests of J_i for resource R_k.

Def. 3. The set of requests of T_j that interfere with requests of a job of T_i for resource R_k is given by

$$\mathit{xif}(T_i, T_j, R_k) \triangleq \left\{ Q_{j,v} \mid 1 \leq v \leq \mathit{tif}(T_i, T_j) \times \mathcal{N}_j^{R_k} \right\}, \tag{3}$$

where $\mathcal{N}_j^{R_k}$ is the maximum number of requests for R_k that a job of T_j may make.

We say that *xif*(T_i, T_j, R_k) defines a set of generic requests because request $Q_{j,v} \in \mathit{xif}(T_i, T_j, R_k)$ does not denote the v^{th} request made by task T_j after the release of T_j's first job. Rather, $Q_{j,v}$ denotes the v^{th} resource request in a worst-case string of consecutive requests of T_j that may interfere with request Q_i of T_i.

Finally, we can derive an aggregate of all interfering requests.

We aggregate the set of interfering requests of all tasks (excluding T_i) into a single set of *all* interfering resource requests that may be made, as given by the *total request interference function*.

Def. 4. The set of all interfering resource requests of other jobs that may interfere with requests of a job of T_i for resource R_k is given by

$$\mathit{txif}(T_i, R_k) \triangleq \bigcup_{T_j \in T \setminus \{T_i\}} \mathit{xif}(T_i, T_j, R_k). \tag{4}$$

Fine-grain execution engine blocking. We can now compute the worst-case blocking job J_i experiences when it requests an execution engine, b_i^K.

Def. 5. Let the function $top(v, \mathcal{S})$ denote the v longest requests in the set of requests $\mathcal{S}$, where request length is given by $l_i = |Q_i|$.

Def. 6. Let $\mathcal{S}_i^{EE} \triangleq \mathit{txif}(T_i, R^{EE})$, denoting the sorted set of interfering requests for execution engines of any single GPU, where $\mathcal{N}_j^{EE} = N_j^K$.

Def. 7. The total worst-case blocking experienced by J_i while waiting for an execution engine is given by

$$b_i^K = \sum_{Q_k \in top((\rho-1) \times N_i^K,\ \mathcal{S}_i^{EE})} |Q_k|, \tag{5}$$

where $|Q_k|$ is equal to K_j of the interfering task T_j that generated Q_k as defined in Sec. 5.

For simplicity, we have assumed that all GPU kernels executed by job J_j are of the same length. Of course, finer-grain bounds may be accommodated by modifying Eq. (3) to generate requests with finer per-kernel lengths.

We must derive fine-grain bounds for $b_i^{I/O}$ and b_i^{P2P} under P2P and system memory migrations. We begin with systems that use P2P migrations.

Fine-grain copy engine blocking with P2P. Fine-grain bounds for $b_i^{I/O}$ and b_i^{P2P} when P2P migrations are used are as follows.

Def. 8. Let $\mathcal{S}_i^{I/O} \triangleq \mathit{txif}(T_i, R^{I/O})$, denoting the sorted set of interfering requests for the copy engine of any single GPU used to copy input and output data, where $\mathcal{N}_j^{I/O} = N_j^I + N_j^O$.

Def. 9. Let $\mathcal{S}_i^{P2P} \triangleq \mathit{txif}(T_i, R^{P2P})$, denoting the sorted set of interfering requests for copy engines of any single GPU used to perform migrations, where $\mathcal{N}_j^{P2P} = N_j^S$.

Def. 10. Let $\mathcal{S}_i^{CE} \triangleq \mathcal{S}_i^{I/O} \bigcup \mathcal{S}_i^{P2P}$, denoting the sorted set of requests that may interfere with any copy engine request of any single GPU.

Def. 11. The total worst-case blocking experienced by J_i while waiting for a copy engine to be used for sending/receiving input/output data when P2P migrations are used is given by

$$b_i^{I/O} = \sum_{Q_k \in top((\rho g-1) \times (N_i^I + N_i^O),\ \mathcal{S}_i^{CE})} |Q_k|, \tag{6}$$

where $|Q_k|$ is equal to the length of the associated copy engine operation (i.e., X^I, X^O, or X^{P2P}).

Def. 12. Let $\widehat{\mathcal{S}}_i^{CE} \triangleq \mathcal{S}_i^{CE} \setminus \left\{ top((\rho g - 1) \times (N_i^I + N_i^O),\ \mathcal{S}_i^{CE}) \right\}$. That is, $\widehat{\mathcal{S}}_i^{CE}$ is the set of remaining requests after $b_i^{I/O}$ has been computed.

Def. 13. The total worst-case blocking experienced by J_i while waiting for copy engine locks via DGLs is given by

$$b_i^{P2P} = \sum_{Q_k \in top((\rho g-1) \times N_i^S,\ \widehat{\mathcal{S}}_i^{CE})} |Q_k|, \tag{7}$$

where $|Q_k|$ is equal to the length of the associated copy engine operation (i.e., X^I, X^O, or X^{P2P}).

Fine-grain copy engine blocking with system memory migration. Fine-grain bounds for $b_i^{I/O}$ and b_i^{P2P} when system memory migrations are used are as follows. We reuse our prior definition of $\mathcal{S}_i^{I/O}$.

Def. 14. Let $\mathcal{S}_i^S \triangleq \mathit{txif}(T_i, R^{I/O})$, denoting the sorted set of interfering requests for copy engines of any single GPU used to copy *state* to or from a GPU, where $\mathcal{N}_j^S = N_j^S$.

Def. 15. Let $\widetilde{\mathcal{S}}_i^{CE} \triangleq \mathcal{S}_i^{I/O} \bigcup \mathcal{S}_i^S$, denoting the sorted set of requests that may interfere with any copy engine request of

any single GPU.

Def. 16. The total worst-case blocking experienced by J_i while waiting for a copy engine when system memory migrations are used is given by

$$b_i^{I/O} = \sum_{Q_k \in top((\rho-1)\times(N_i^I+N_i^O+2N_i^S),\, \widetilde{\mathcal{S}}_i^{CE})} |Q_k|\,, \quad (8)$$

where $|Q_k|$ is equal to the length of the associated copy engine operation (i.e., X^I, X^O, or X^{P2P}). Note that g does not appear in Eq. (8) for the reasons given at the end of Sec. 5.

This concludes fine-grain blocking analysis for engine locks.

GPU token blocking. We now derive fine-grain blocking bounds for GPU tokens. Recall from Sec. 5 that C_i denotes the maximum token critical section length of T_i. A fine-grain value for C_i can be computed using the fine-grain blocking analysis above for engine locks. Also recall that b_i^C denotes the time a job of T_i may be blocked while waiting for a GPU token.

Def. 17. Let $|T|$ denote the number of GPU-using tasks.

Def. 18. Let N^{TCX} denote the maximum number of token critical sections that may block a given token request.

There are three modes of worst-case blocking under the R^{2}DGLP [28], the k-exclusion locking protocol used to allocate GPU tokens to tasks. If $|T| \leq \rho g$, then token requests are trivially satisfied since there is always an available token for any requesting task; $N^{TCX} = 0$. If $\rho g < |T| \leq m$, then $N^{TCX} = \lfloor (|T|-1)/\rho g \rfloor$. If $|T| > m$, then $N^{TCX} = 2\lceil m/(\rho g) \rceil - 1$.

Given these task set-dependent values for N^{TCX}, we can compute b_i^C.

Def. 19. Let $\mathcal{S}_i^{TCX} \triangleq \mathit{txif}(T_i, R^{TCX})$, denoting the sorted set of interfering requests for GPU tokens, where $\mathcal{N}_j^{TCX} = 1$ (that is, a token is requested at most once per job for all tasks).

Def. 20. The total worst-case blocking experienced by J_i while waiting for a GPU token is given by

$$b_i^C = \sum_{Q_k \in top(N^{TCX},\, \mathcal{S}_i^{TCX})} |Q_k|\,, \quad (9)$$

where $|Q_k|$ is equal to C_j of the task T_j that generated Q_k.

This concludes the fine-grain analysis for GPUSync.

B Overheads

Here we present more details about the overheads used in our schedulability experiments, detailing algorithmic and memory overheads, and measurement methods.

Overhead	Average Overhead	Worst-Case Overhead
Δ^{sch}	$0.63\mu s$	$1.34\mu s$
Δ^{cxs}	$0.36\mu s$	$0.7\mu s$
Δ^{ipi}	$0.60\mu s$	$0.84\mu s$
Δ^{rel}	$0.67\mu s$	$1.36\mu s$
Δ^{th}	$16.44\mu s$	$19.33\mu s$
Δ^{bh}	$29.90\mu s$	$35.59\mu s$
Δ^{bhrel}	$1.39\mu s$	$1.99\mu s$
Δ^{tck}	$0.86\mu s$	$2.64\mu s$
Q	$1ms$	

Table 2: Observed overheads on our evaluation platform.

B.1 Algorithmic Overheads

The Appendix B in the online version of [9] gives detailed information on algorithmic overheads in GPU-enabled systems. We direct the reader to that work for information on how these overheads are incorporated into overhead-aware schedulability analysis. We briefly summarize the source of each overhead here. This is followed with the average and worst-case values measured for each overhead.

Δ^{sch} is the duration of a scheduling decision. Δ^{cxs} is the time taken to perform a context switch. Δ^{ipi} is the delay caused by inter-processor interrupt (IPI) communication. Δ^{rel} is the time taken to add a newly released job to the scheduler ready queue. Δ^{th} is the duration of top-half execution for GPU interrupts. Likewise, Δ^{bh} is the time taken to execute the bottom-half of a GPU interrupt. Δ^{bhrel} is the time taken to add a newly arrived bottom-half to the GPU bottom-half scheduler (in this case, klmirqd [9]). Δ^{tck} is the time taken to process a scheduler tick interrupt, which executes at the end of every scheduler quantum that is Q in length. Note that Q is a configuration value set when the operating system is compiled.

Table 2 gives the measured values for each of these overheads. Note, as stated in Sec 6, we used an interquartile range filter (with a range of 1.5) to remove outliers since these measurements may be affected by non-deterministic events such as interrupt handling since these events introduce measurement errors. Unfortunately, this method does run the risk of filtering out valid measurements in long-tail distributions.

B.2 CPMDs

We measured CPMDs using methods described in [3, 4], extended to include the effects of GPU memory traffic. A single test thread is performs memory operations while in the presence of cache-polluting and GPU-using threads.

The test and cache polluting threads were scheduled on NUMA *node*$_0$ of our test system. The test thread was scheduled with a POSIX real-time SCHED_FIFO priority, while the cache polluting threads ran as regular background threads. Thus, the test thread was immediately scheduled whenever it was ready to run. GPU-using threads were scheduled on NUMA *node*$_1$. *However*, the Linux tool

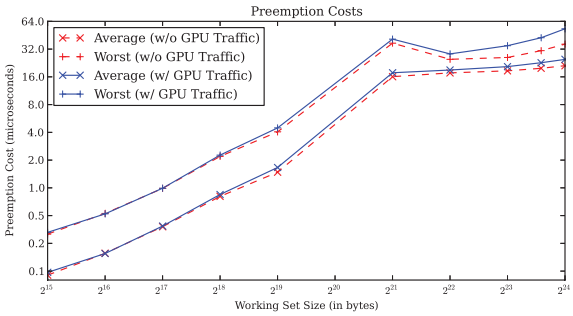

Figure 11: Preemption cost increase with GPU traffic.

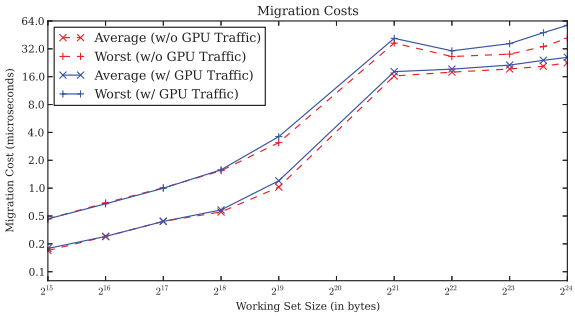

Figure 12: Migration cost increase with GPU traffic.

`numactl` was used to ensure that the memory for the GPU-using threads was allocated on $node_0$. The GPU-using threads then accessed the GPUs on $node_0$ directly to perform large memory copies. A 2:1 mix of 128MB copies from system memory GPUs and 64MB copies from GPUs to system memory was used to perform both read and write operations on system memory. All GPU-based memory traffic was limited to $node_0$.

Within this framework, the test thread periodically slept and migrated among CPUs in $node_0$ to simulate preemptions and migrations. High-resolution timers were used to control the duration of preemptions and migrations. CPMDs were computed by comparing the execution time of a sequence of read/write operations upon data of a given *working set size* (*WSS*) in the presence and absence of preemptions and migrations. CPMDs are sensitive to read:write ratios; to keep our study tractable, we limited attention to a read:write ratio of 3:1. Working set sizes between 32KB and 16MB were tested.

Each processor of the test platform had a 12MB L3 shared cache. Each core had a private L1 and L2 cache of 64KB and 256KB, respectively. On an Intel platform such as ours, caches are inclusive, where the Ln cache is a proper subset of L$n+1$. Note that for WSSs larger than 12MB, the test thread evicts some of its own data from the L3 cache during execution.

Fig. 5 of Sec. 6 already presented the relative increase in CPMDs caused by GPU memory traffic. Here we present the actual average-case and worst-case measurements for both preemptions and migrations. Note, as prescribed by [3, 4], a CPMD for a given WSS is given by the maximum between

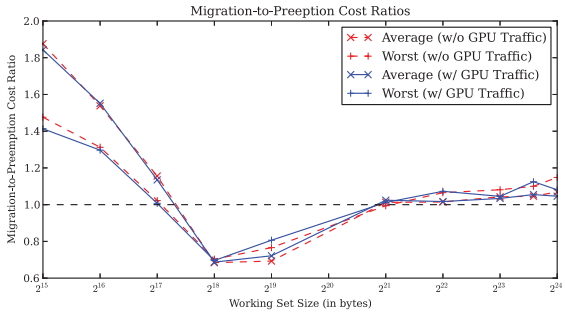

Figure 13: Preemption cost increase with GPU traffic.

the preemption and migration cost for the given WSS.

Figs. 11 and 12 give the preemption and migration costs for the tested WSSs, respectively. Both axes in each figure are on a base-2 log scale. We can observe that the graphs are largely indistinguishable for WSSs larger than 64KB. Upon closer examination, we find that there is some variation between migrations and preemptions. This is depicted in Fig. 13, where the measured migration cost is divided by preemption cost to compute a migration-to-preemption ratio. Values greater than 1.0 indicate instances where migrations were more expensive than preemptions. Migrations were more expensive than preemptions for WSSs on the ranges [32KB, 128KB] and [2MB, 16MB]. Preemptions were more expensive than migrations for WSSs on the range [256KB, 512KB] (note, WSSs of 1MB were not measured). Fig. 13 illustrates the importance of taking the maximum between preemption and migration costs to compute accurate CPMD costs.

B.3 GTMDs

As described in Sec. 6, GMTDs were measured in the presence of system memory bus load caused by CPU cache polluters. GPU bus polluters were also executed to stress the PCIe bus.

The GMTD test framework used the same arrangement used for CPMDs: the test thread and cache polluters were scheduled on NUMA $node_0$, and GPU bus polluters were scheduled on $node_1$ with their memory allocated on $node_0$. As before the GPU bus polluters accessed the GPUs on $node_0$.

Unlike before, the test thread now performed GPU copy operations between system and GPU memory. The bus polluters were configured to generate the worst-case bus contention for a given memory copy scenario. For example, when measuring far P2P migrations from GPU_0 to GPU_3, one bus polluter executed large memory copies (512MB) from GPU_1 to system memory, and another bus polluter executed large memory copies (512MB) from system memory to GPU_2. This generated the worst-case bus contention on the full-simplex PCIe bus for far P2P migrations between GPUs with one copy engine.

We note that worst-case bus contention can be *greater* for

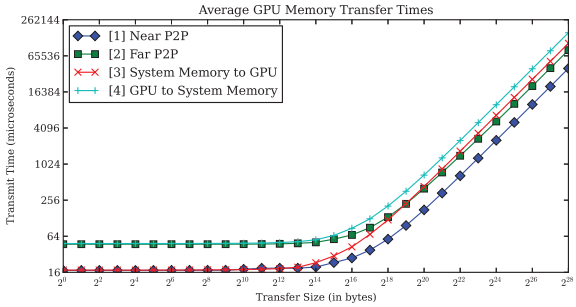

Figure 14: Average-case GPU memory transmission times.

GPUs with two copy engines, depending upon how copy engines are managed, since both copy engines may operate in the same *direction* (sending or receiving, with respect to GPU memory). We left GMTD measurements for GPUs with two copy engines to future work, since we did not have GPUs with two copy engines available to us.

Sec. 6 already gives complete information for worst-case GPU memory transmission times. For the sake of completeness, we give the average-case GPU memory transmission times in Fig. 14. Similar trends observed in Fig. 6 may also be observed in Fig. 14. However, unlike in Fig. 6, we observe that far P2P copies take about as long as GPU to system memory copies for transmissions between one byte and 8KB. Far P2P copies take *less* time than GPU to system memory copies for transmissions greater than 16KB. This was not always the case in Fig. 6; far P2P copies took *more* time, in the worst-case, than GPU to system memory copies for transmission sizes less than 2MB. This indicates that far P2P copies are competitive with GPU to system memory copies in the average case. However, to optimize worst-case behavior for far P2P copies in comparison to system memory migrations, chunk sizes should be 2MB or greater. This is the reason 2MB and 4MB chunk sizes were tested in our schedulability experiments (Sec. 6 and Appendix C), instead of the 1MB chunk size suggested in [15].

C Schedulability Tests

We now provide more detail on the schedulability experiments carried out in Sec. 6.

C.1 Experimental Setup

As described in Sec. 6, a wide parameter space was explored in our schedulability experiments. Parameters were either task set parameters or system configuration parameters. These parameters are summarized in Tables 3 and 4 for task set and system configuration parameters, respectively. Each unique combination of task set and system configuration parameters yielded a unique schedulability experiment (scenario).

Note that the schedulability experiments presented in this appendix include experiments for GPUs with two copy engines. We made best-guess data transmission rates based upon the data we gathered for GPUs with a single copy engine. These estimates included doubling the transmission time for the 2-copy-engine-IE scenarios, as discussed in Appendix A.

We generated task sets for each experiment with task set utilizations ranging from (0, 12], capturing the possible system utilizations on our test platform. Task sets where any GPU-using task did not have enough time to send one chunk of input or output data were discarded (not tested). Task sets where the prerequisite percentage number of GPU-using tasks could not be generated were also discarded.

Each task set was partitioned using a two-pass, worst-fit, heuristic that first partitioned GPU-using tasks among GPU clusters and associated CPU clusters in one pass, and then partitioned CPU-only tasks in another. Schedulability for bounded tardiness was then tested. Blocking terms were computed using fine-grained analysis from Appendix A. Enough task sets were tested for each experiment to generate smooth schedulability curves; this came to roughly 400,000 task sets per experiment, though some experiments required as many as 800,000 task sets.

C.2 Results

The results from schedulability experiments are partially combined into single graphs. Each graph combines the results for P2P, system memory migration, exclusive locking, and copy engine configuration parameters, for a total of six lines per graph. There is a unique graph for each combination of remaining parameters. Graphs are then grouped by CPU organization, GPU organization, utilization distribution, total GPU time, state size, chunk size, and finally, percentage of GPU-using tasks in each task set. We display results for each value of ρ for the above parameters on a single page. Further, average-case results in the left column and worst-case results in the right column. Parameters not given in each figure caption remained unchanged across all experiments. These unlisted parameters are those in Tables 3 and 4 that have only one value or range. For example, the number of GPU kernels per GPU-using task were selected uniformly from the *single* range [1, 5].

Parameter	Description	Scenario Values/Ranges
Overheads	Overhead values were selected upon whether average- or worst-case provisioning was assumed.	Average-Case, Worst-Case
Task set utilization distribution	Task utilizations were bi-modal. A given task's utilization was uniformly selected from the range [0.1, 0.4] with a probability of q, or uniformly selected from the range [0.5,0.9], otherwise. q was selected on a per-scenario basis.	8/9, 6/9, 4/9
Task set period distribution	Task periods were uniformly selected from the scenario's range.	[33.33ms, 100ms]
CPU cache WSS distribution of CPU-only tasks	WSSs were selected uniformly from the scenario's range.	[32KB, 512KB]
CPU cache WSS distribution of GPU-using tasks	WSSs were selected uniformly from the scenario's range.	[512KB, 2MB]
Number of GPU kernels per GPU-using task	Number of kernels were selected uniformly from the scenario's range.	[1, 5]
GPU state size	State size was set according the scenario value.	0MB, 4MB, 8MB, 16MB, 32MB, 64MB
Percentage of GPU-using tasks in task set	The percentage of GPU-using tasks in a task set was selected uniformly from a given range.	[10%, 20%], [20%, 30%], [30%, 40%], [40%, 50%], [50%, 60%], [60%, 70%], [80%, 90%], [90%, 100%]
Token critical section length as percent of utilization	A task's total execution time was derived from period and utilization sections. A selected percentage of this execution time is considered the token critical section for a GPU-using task. The token critical section length percentage was selected uniformly from the scenario's range.	[50%, 90%]
Total GPU time	A percentage of a task's token critical section was considered total GPU time (time spent copying input/output data and executing kernels). The total GPU time percentage was selected uniformly from the scenario's range.	[75%, 95%], [25%, 50%]
Total GPU kernel execution and input/output time	The total GPU time was split into GPU kernel and input/output time. The total input/output time percentage was selected uniformly from the scenario's range. Given chunk size transmit rate data, the number of data chunks for input and output were computed. The remaining time was considered GPU kernel execution time. Per-kernel execution times were computed from the selected number of GPU kernels (total GPU time divided by number of kernels).	[25%, 50%]

Table 3: Task set parameters.

Parameter	Description	Scenario Values/Ranges
ρ	Number of tokens per GPU. If ρ was zero, then exclusive locking was used instead of GPUSync.	0, 1, 2, 3
Migration	Migration method used. Migration was only disabled (none) when GPUs were partitioned (8x1).	P2P, System Memory, none
Number of copy engines	Number of copy engines per GPU. System memory migrations were not tested under the 2 (IE) scenarios for the reasons given in Appendix A.	1, 2 (IE), 2(IB)
CPU organization	Partitioned or clustered (expressed as # clusters x # CPUs-per-cluster).	12x1, 2x6
GPU organization	Partitioned or clustered (expressed as # clusters x # GPUs-per-cluster).	8x1, 2x4, 4x2
GPU chunk size	Chunk size was set according the scenario value. Chunking was only disabled (none) when exclusive locking was used.	2MB, 4MB, none

Table 4: System configuration parameters.

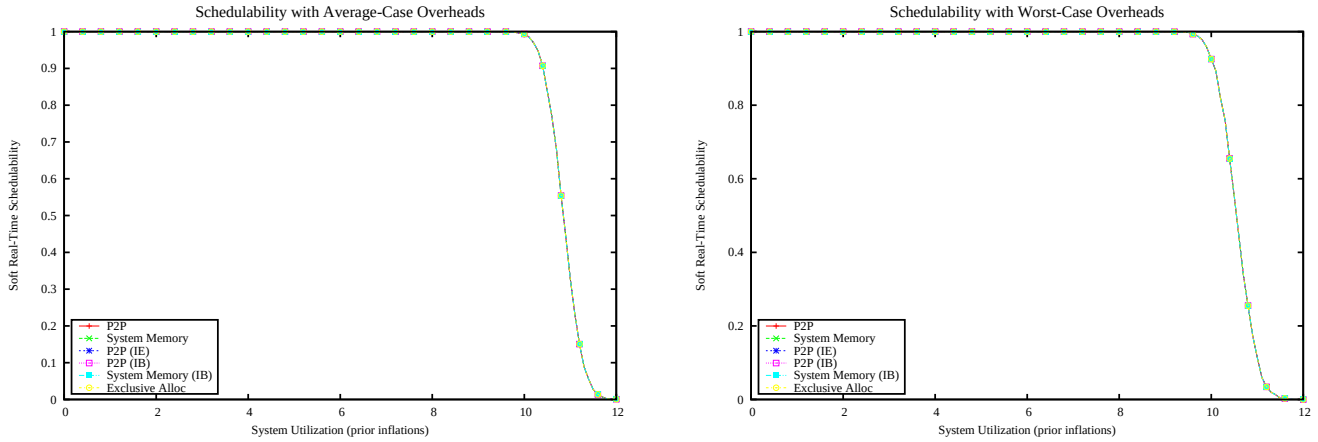

Figure 15: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

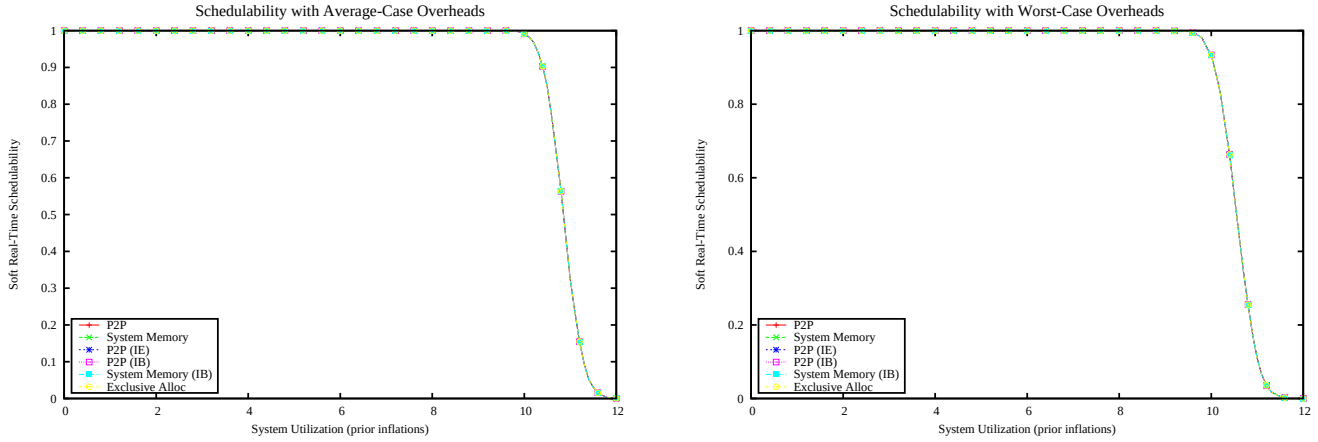

Figure 16: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

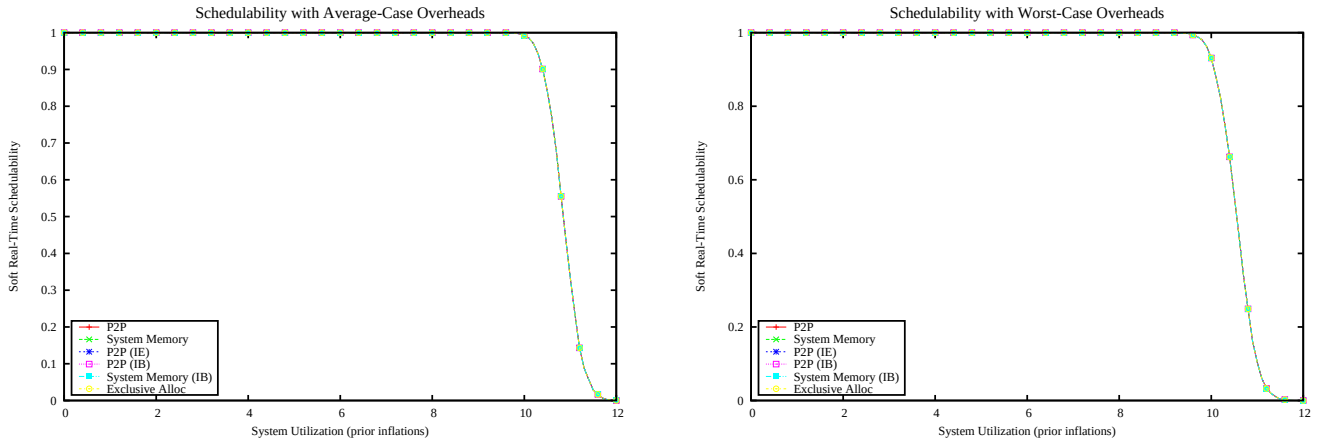

Figure 17: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

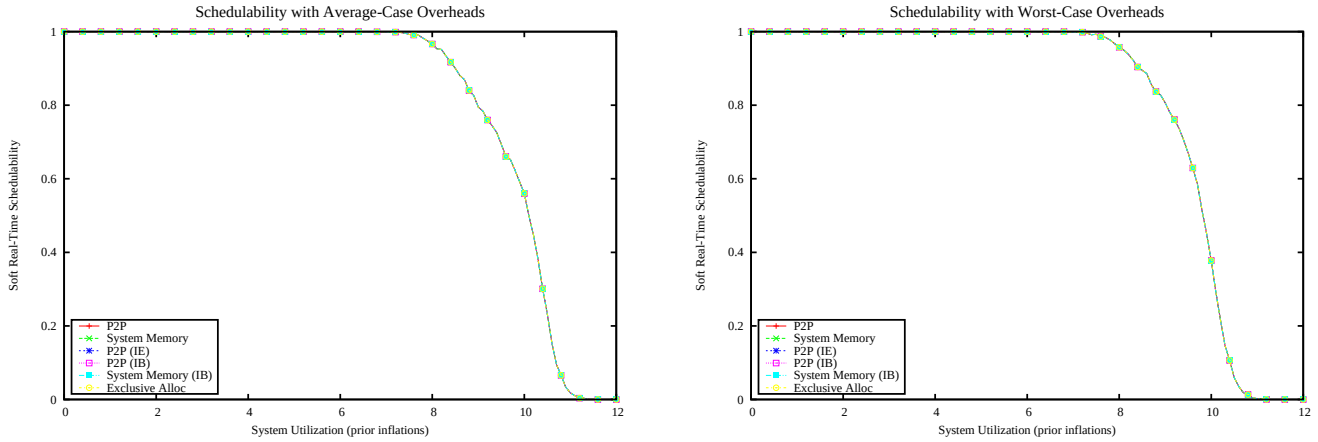

Figure 18: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

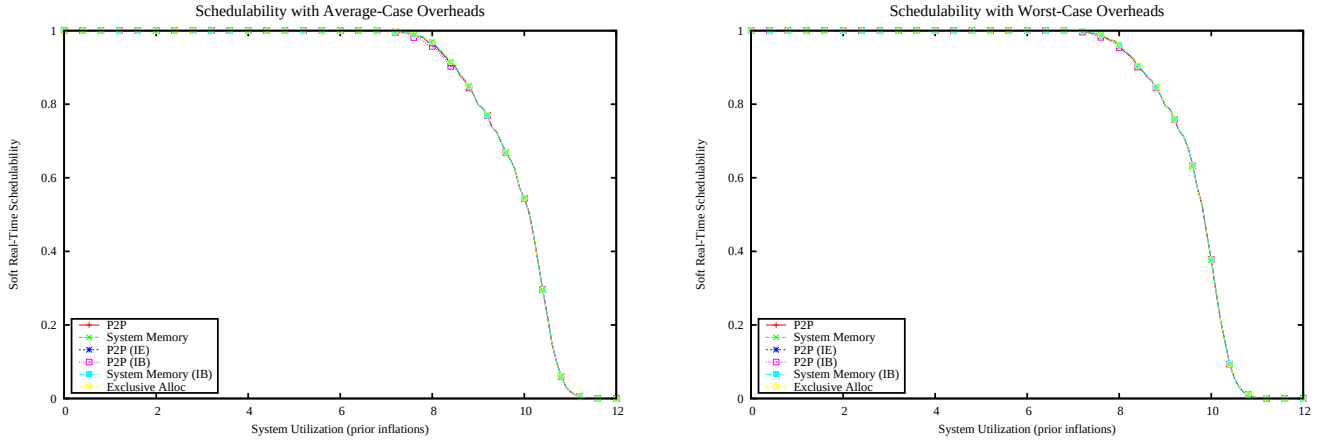

Figure 19: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

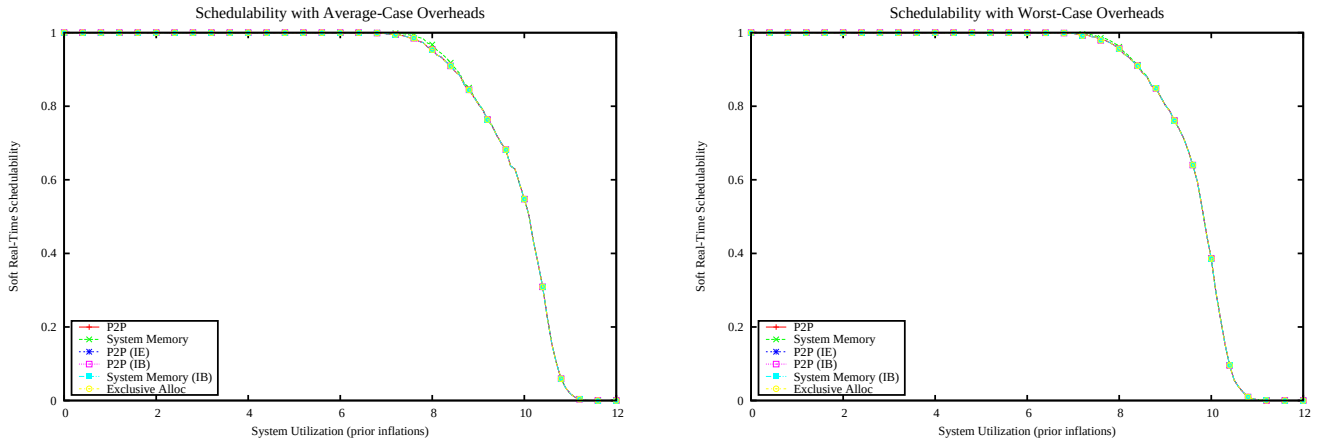

Figure 20: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

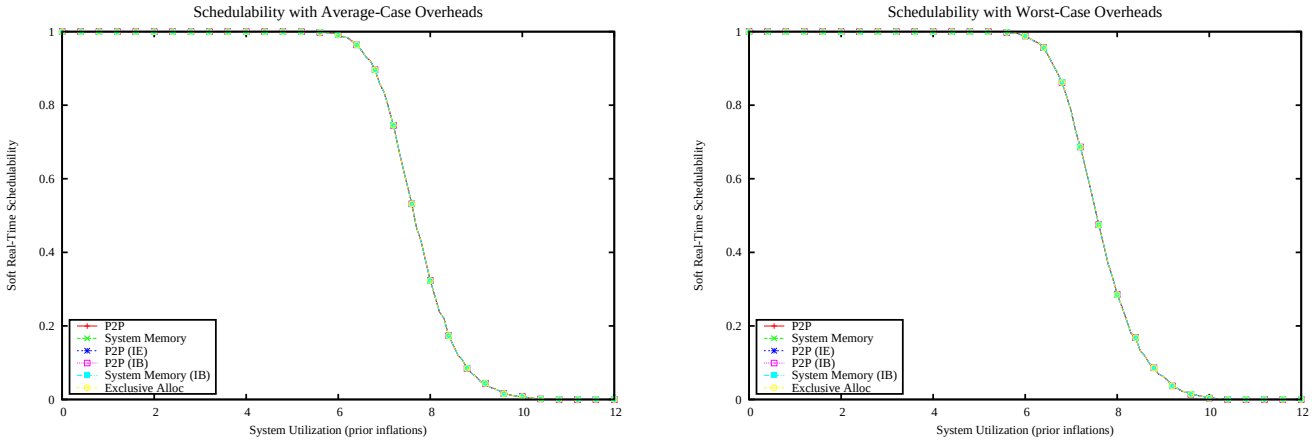

Figure 21: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

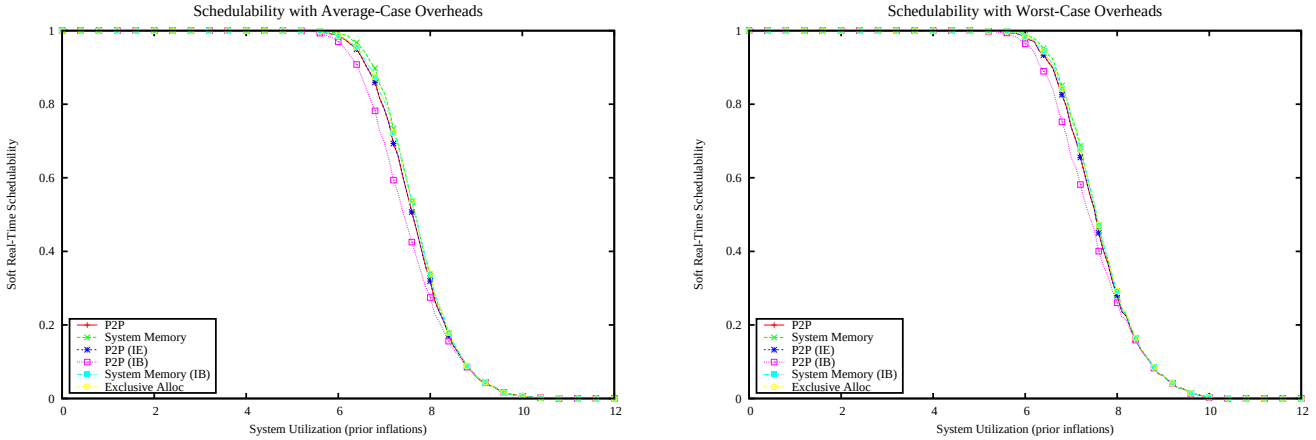

Figure 22: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

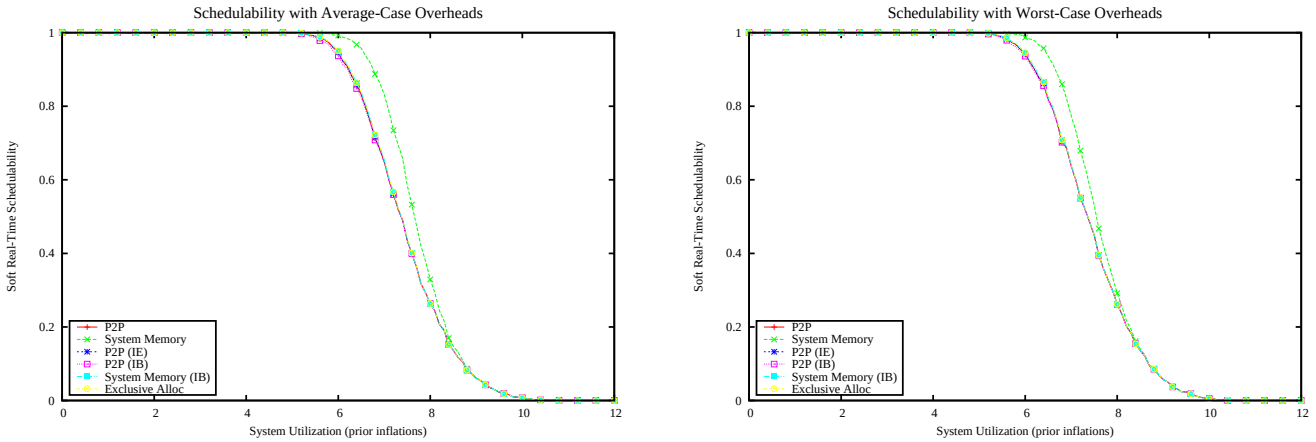

Figure 23: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

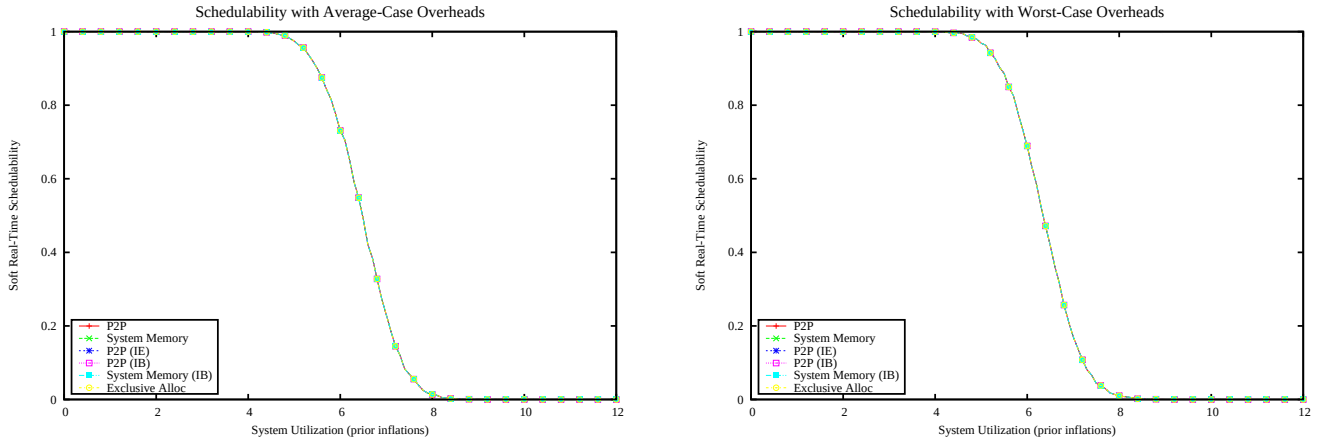

Figure 24: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

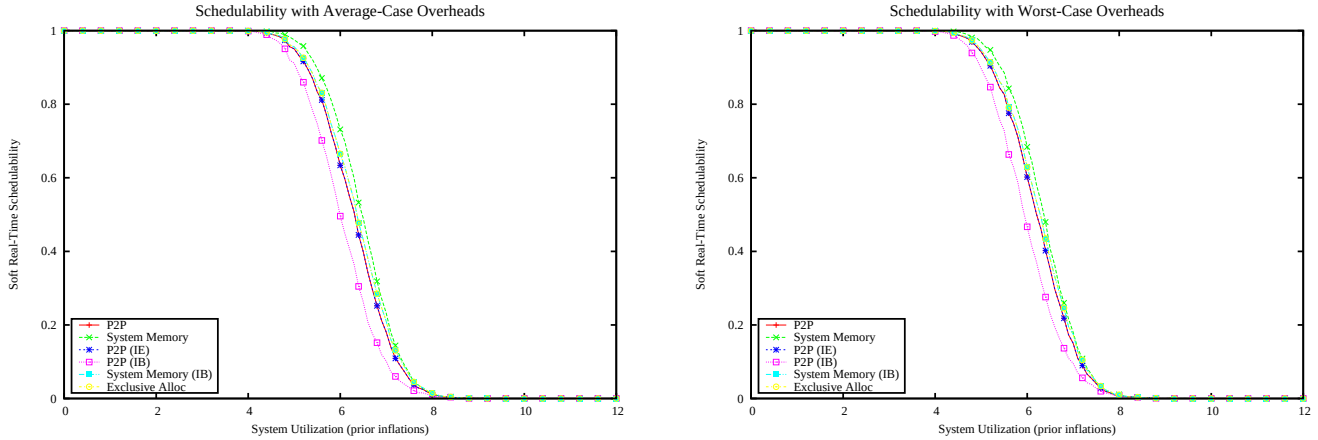

Figure 25: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

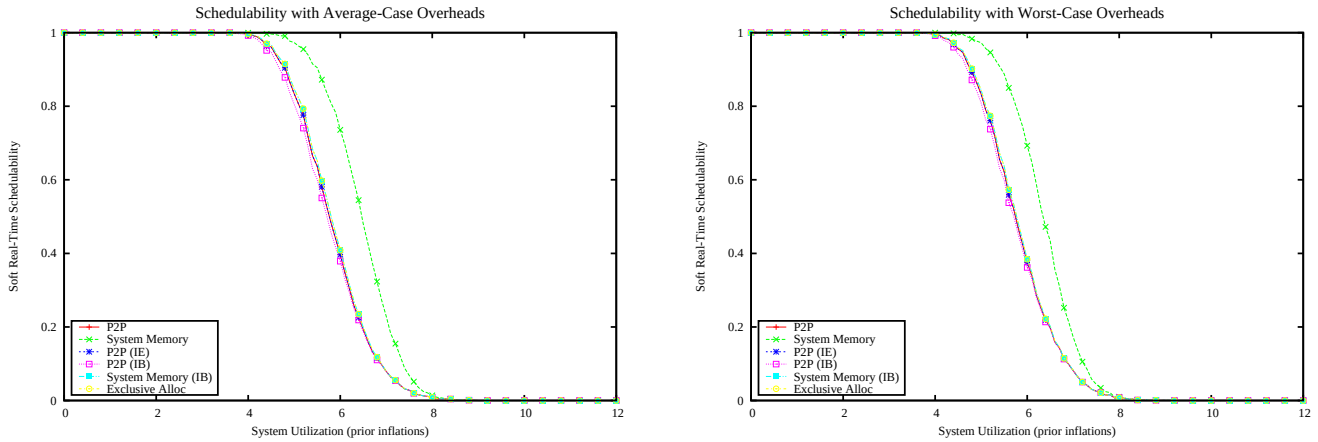

Figure 26: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

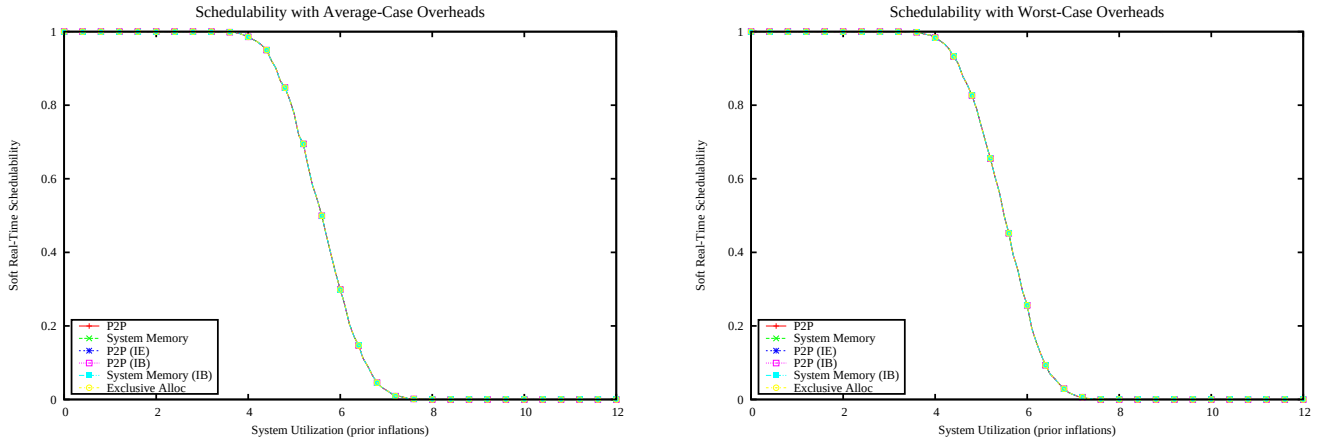

Figure 27: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

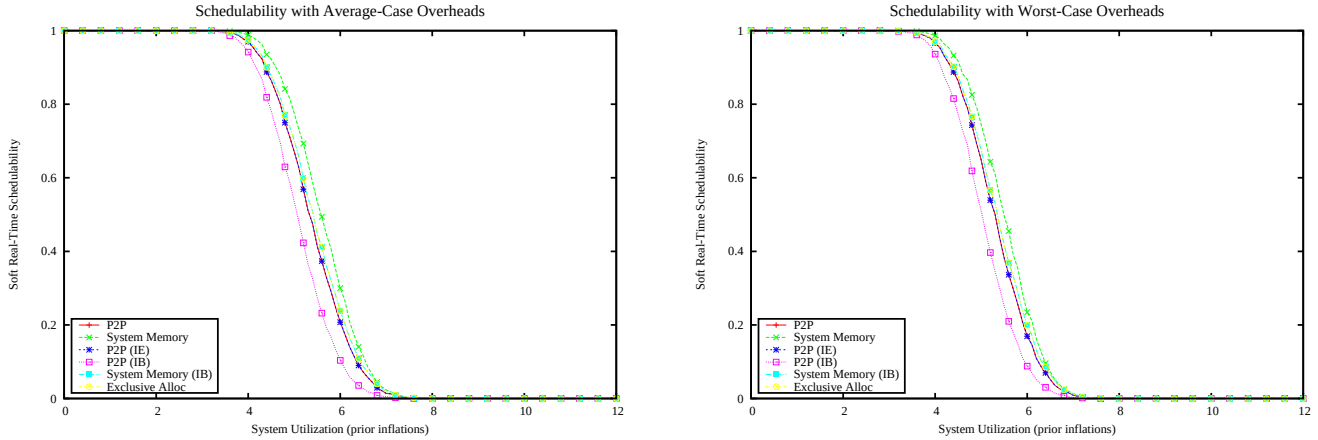

Figure 28: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

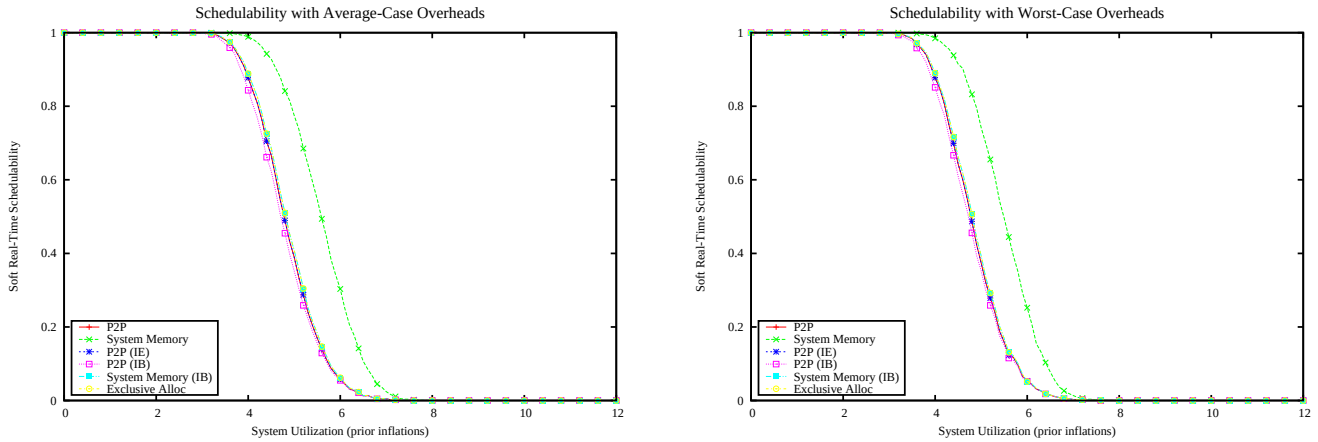

Figure 29: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

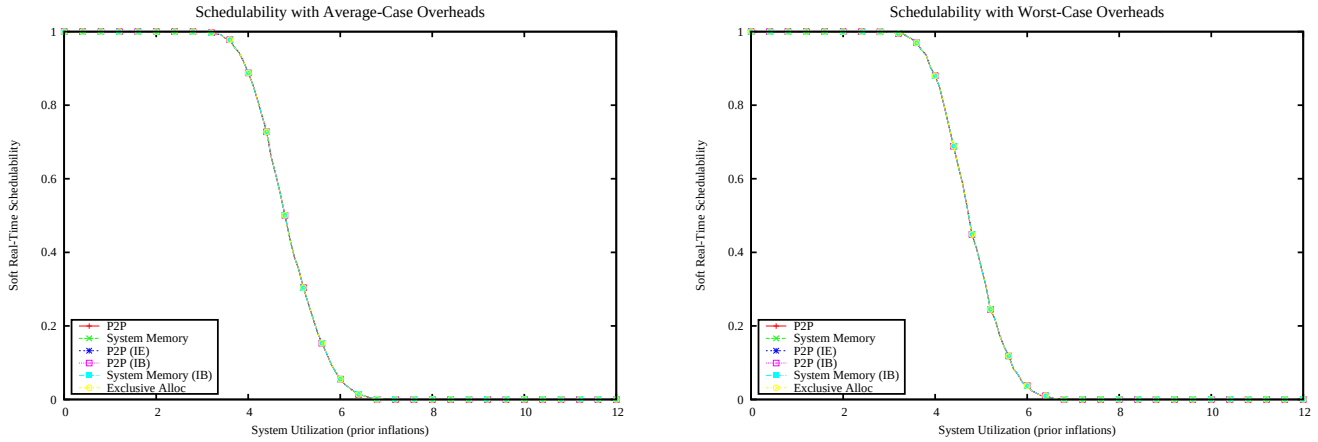

Figure 30: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

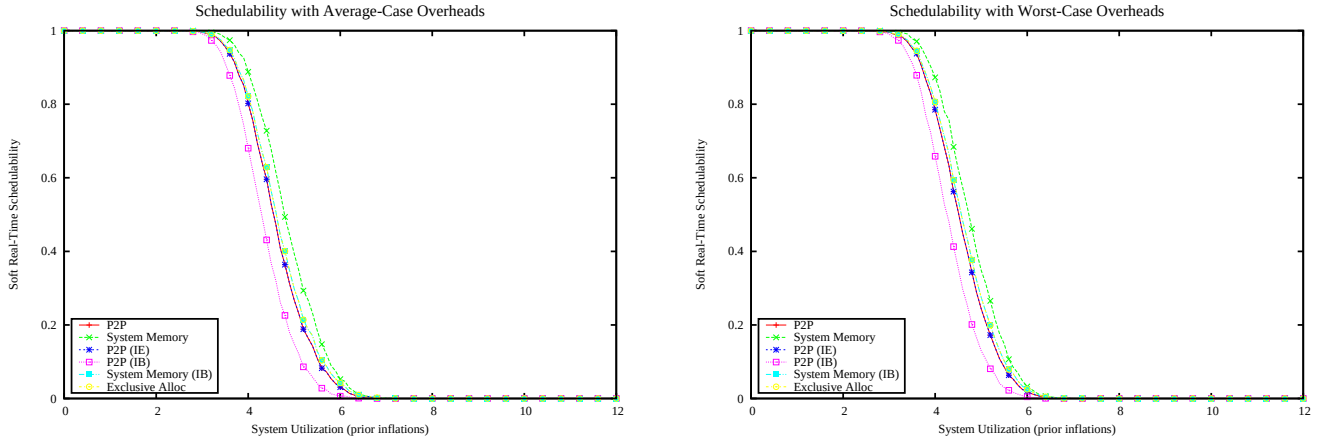

Figure 31: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

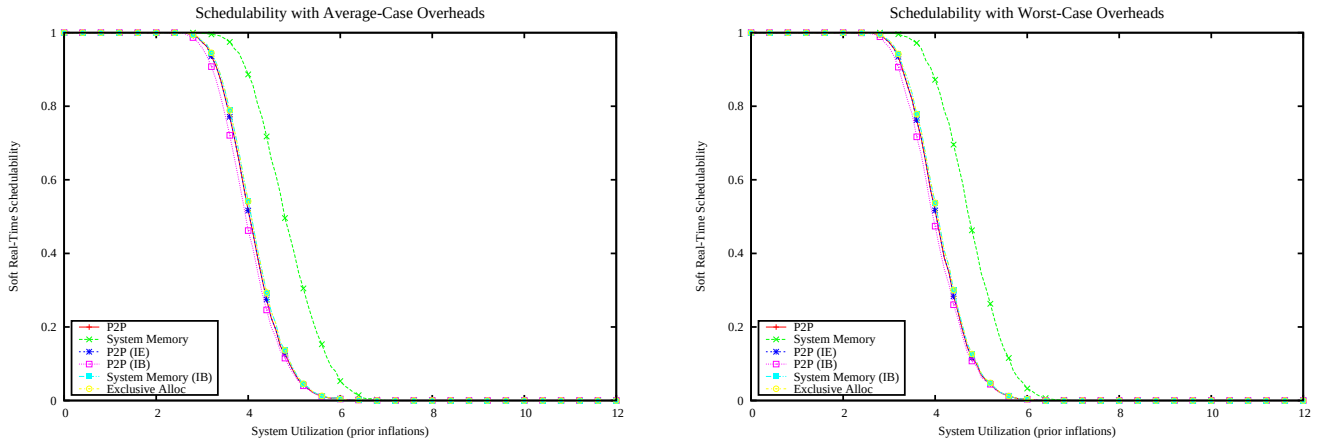

Figure 32: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

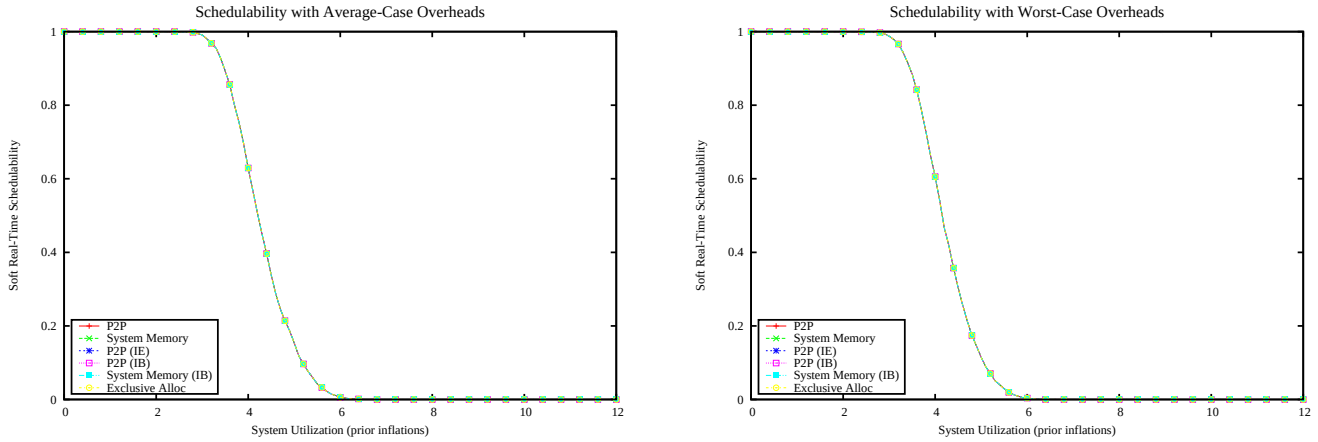

Figure 33: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

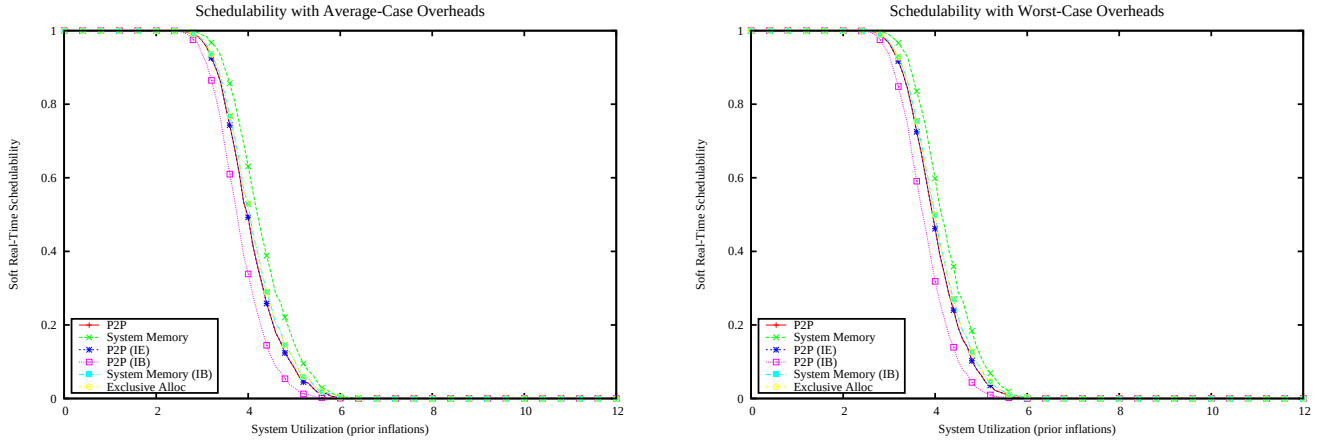

Figure 34: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

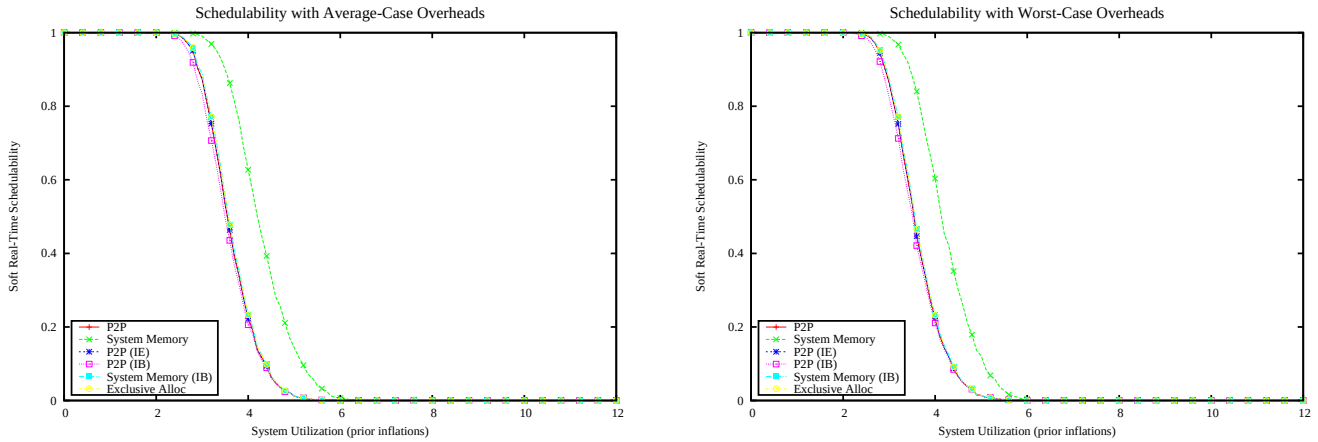

Figure 35: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

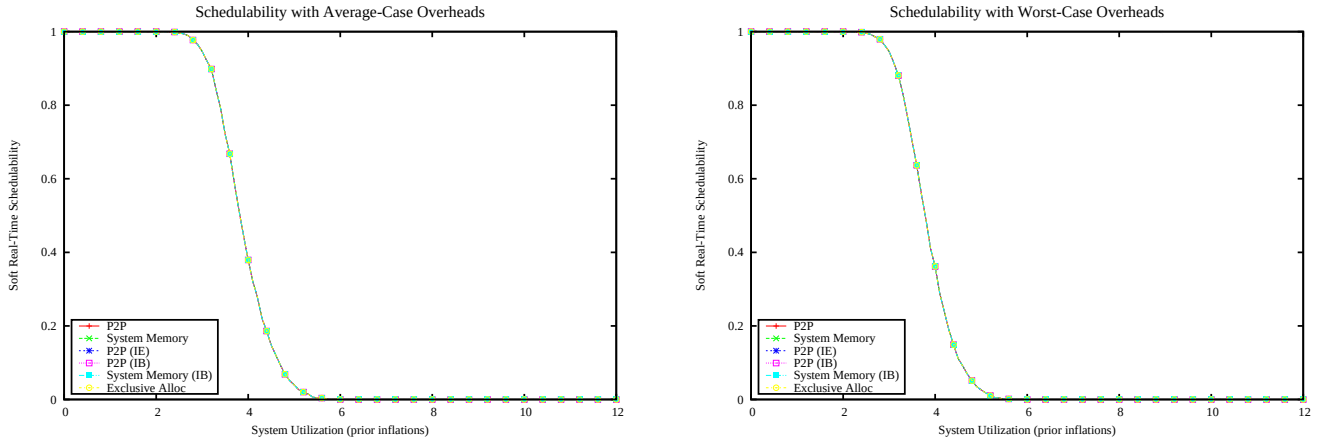

Figure 36: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

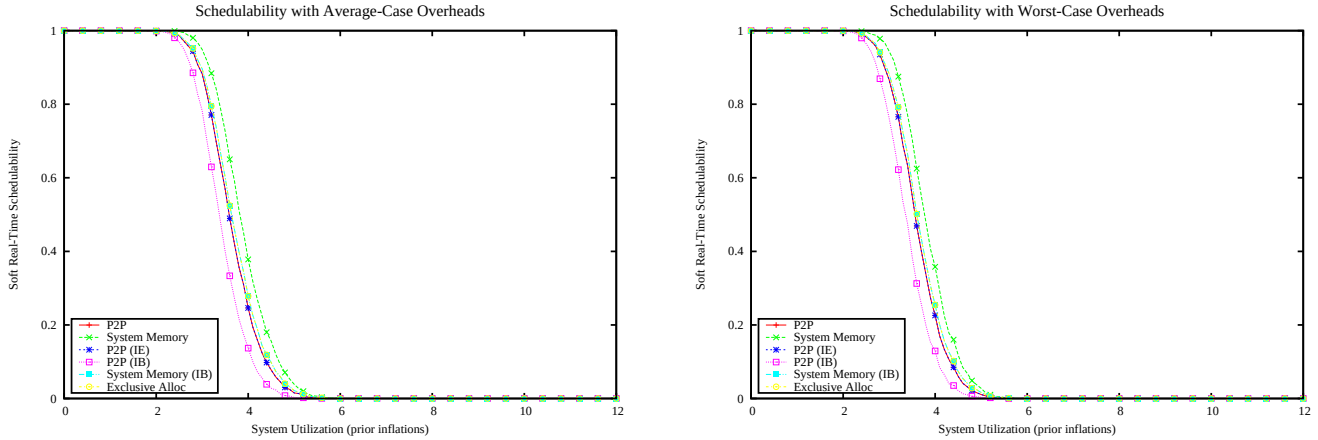

Figure 37: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

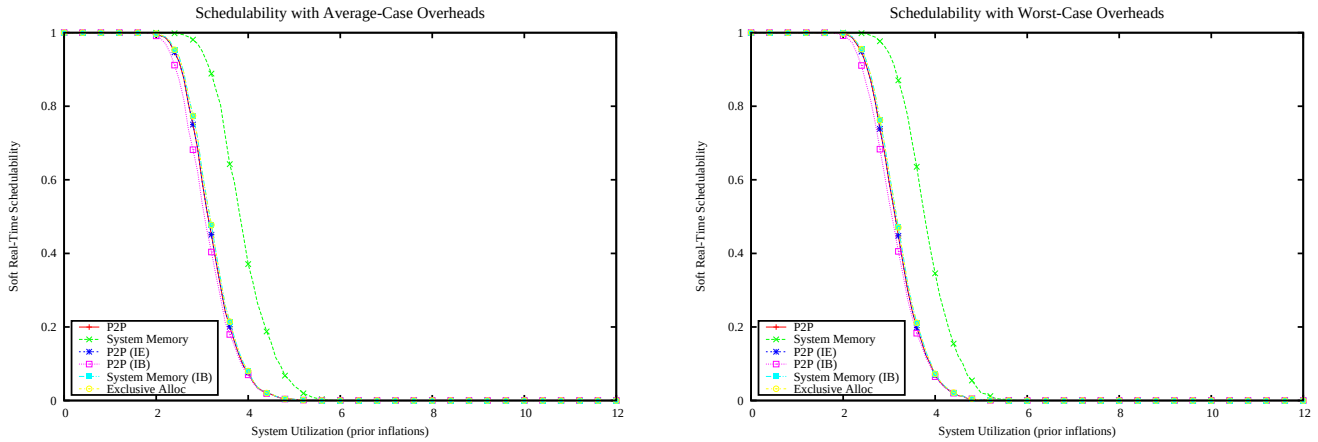

Figure 38: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

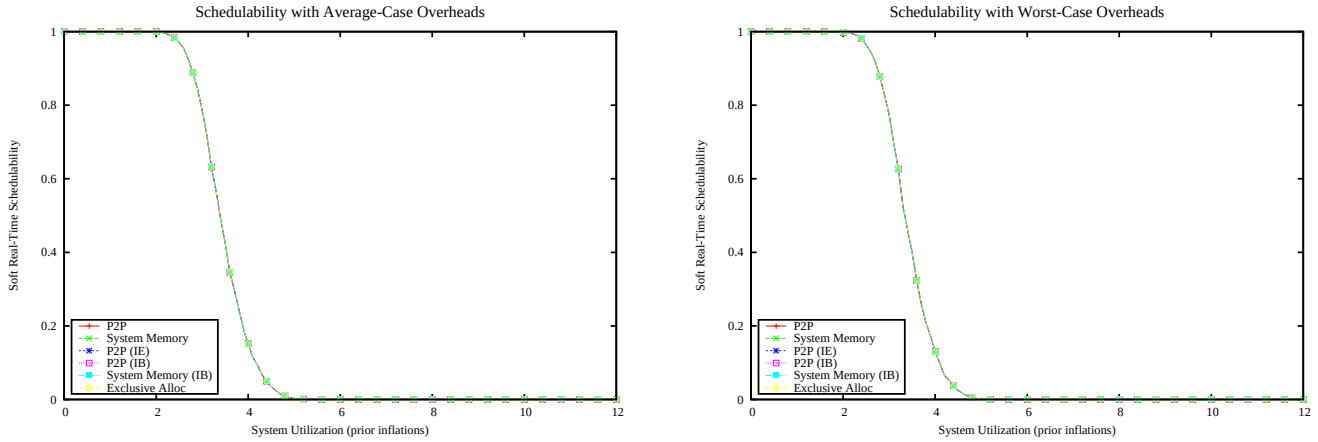

Figure 39: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

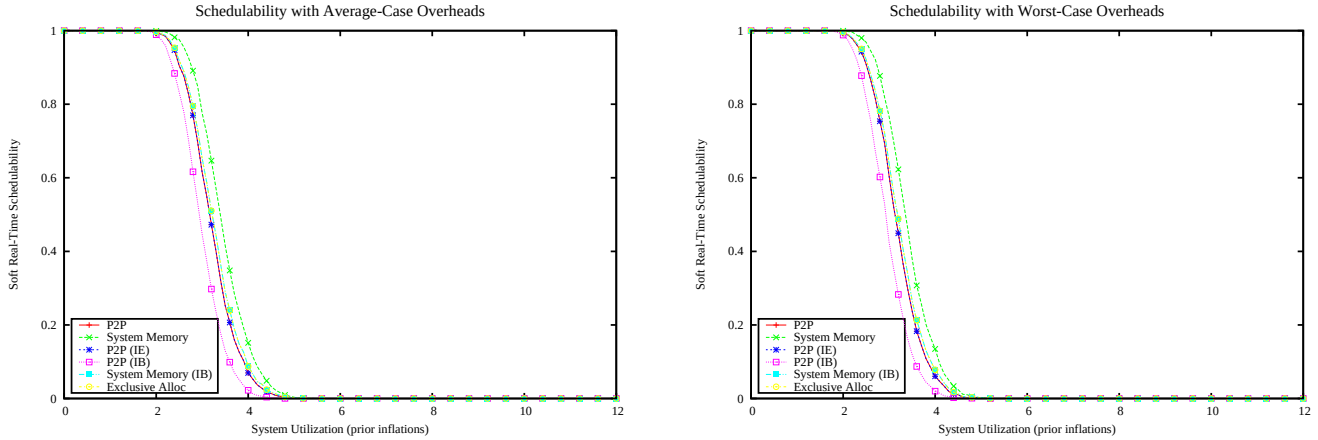

Figure 40: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

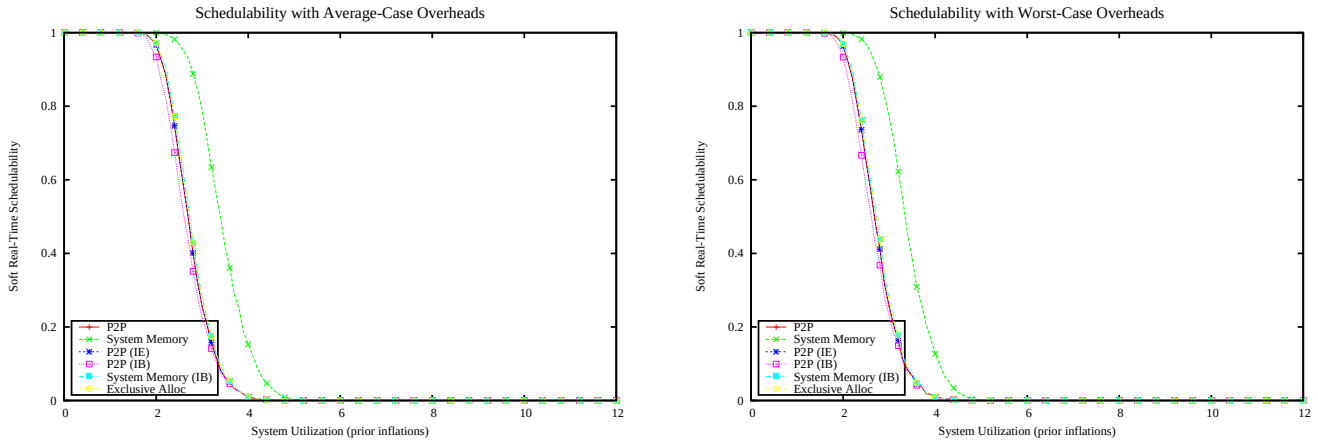

Figure 41: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

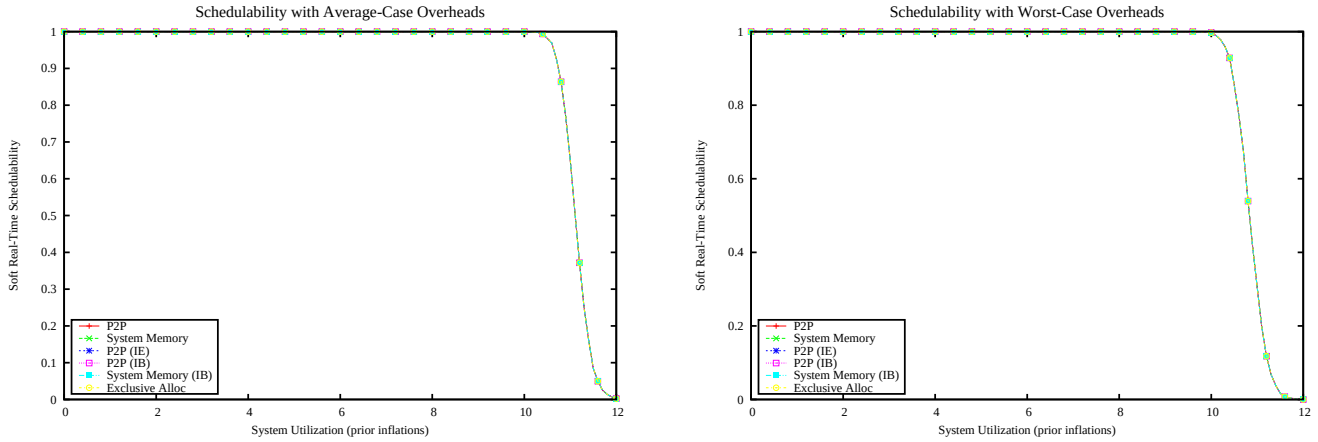

Figure 42: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

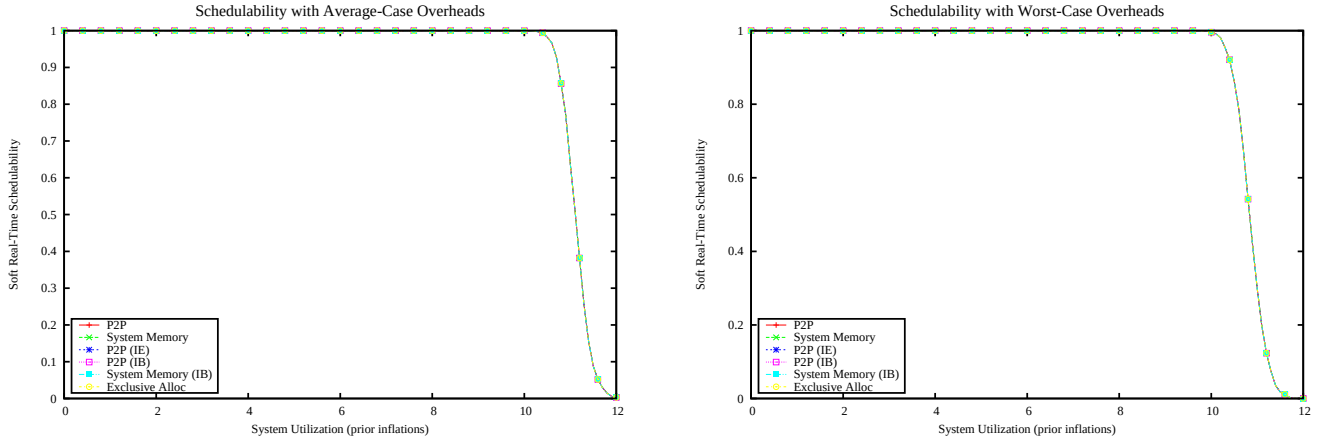

Figure 43: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

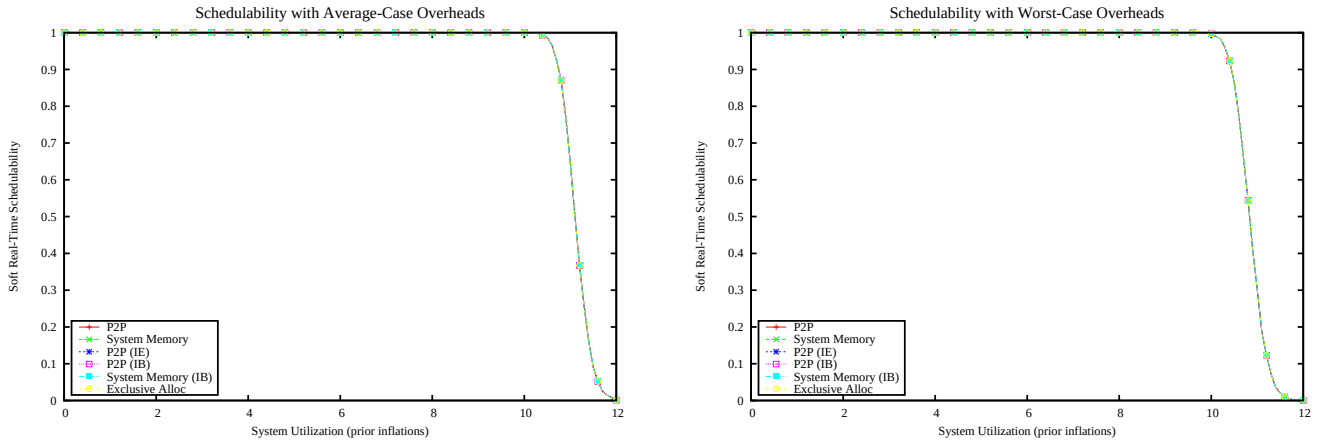

Figure 44: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

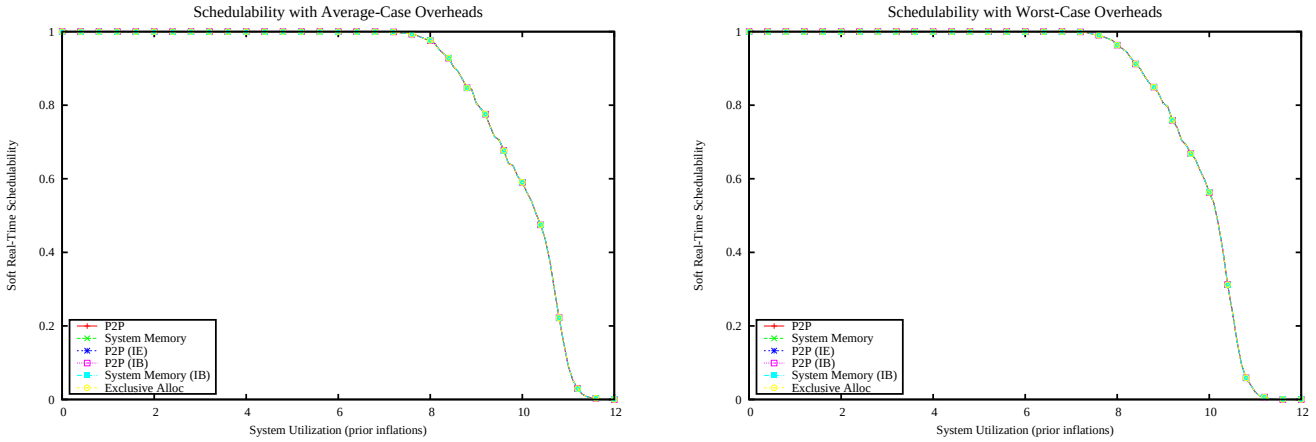

Figure 45: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

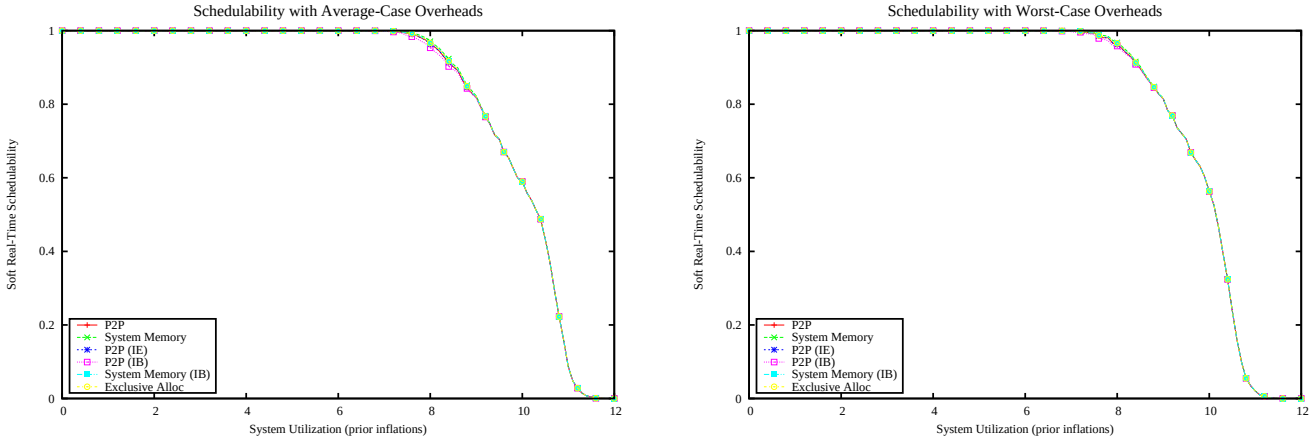

Figure 46: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

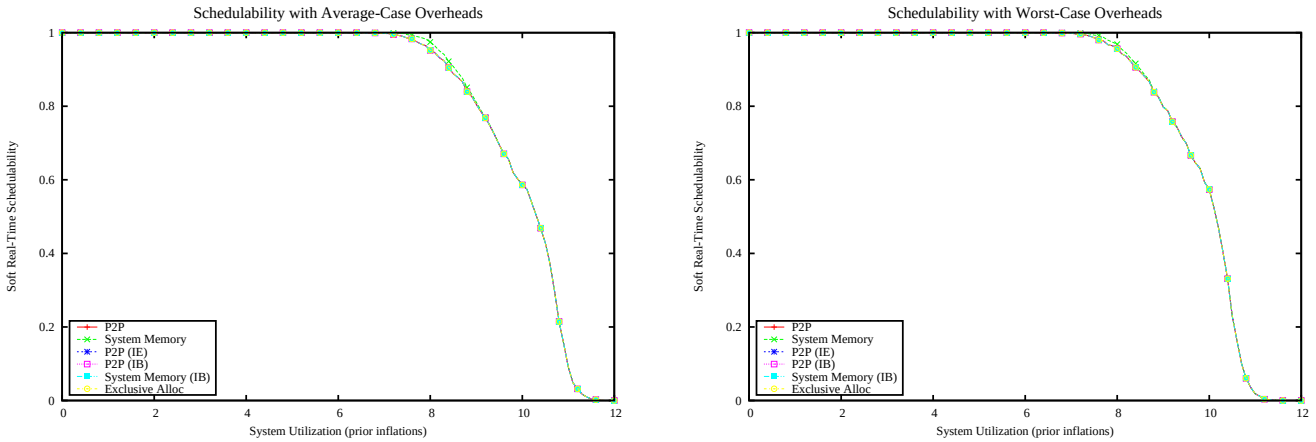

Figure 47: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

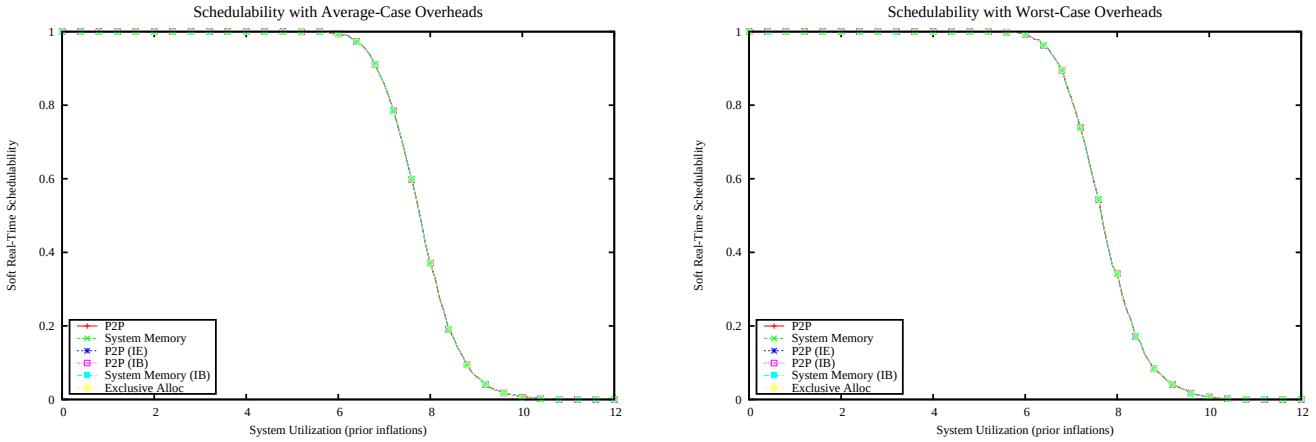

Figure 48: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

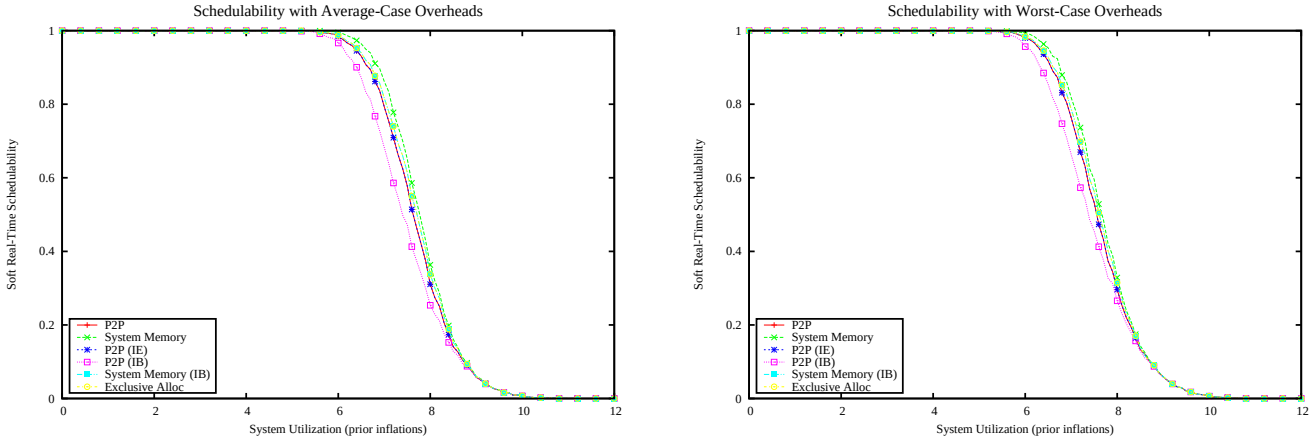

Figure 49: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

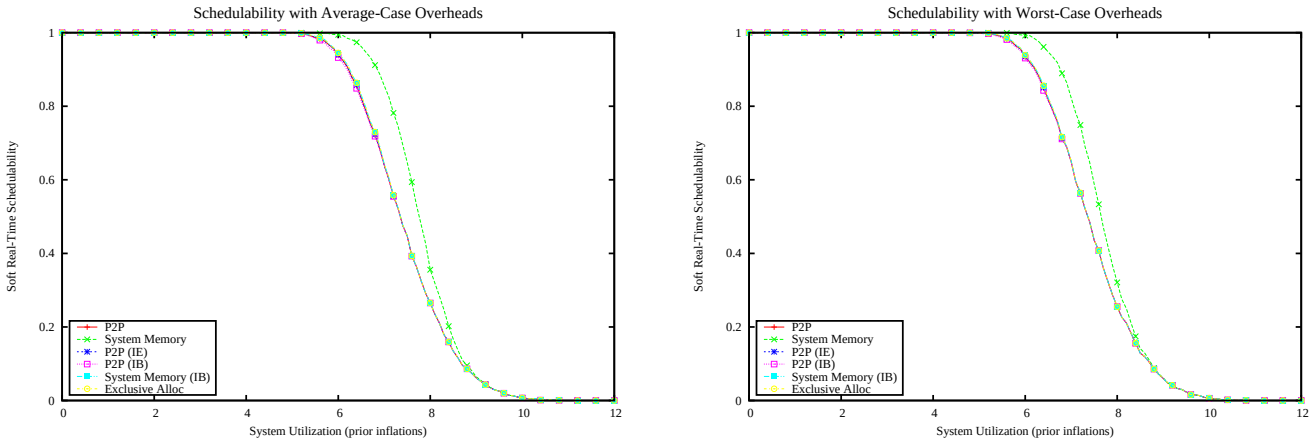

Figure 50: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

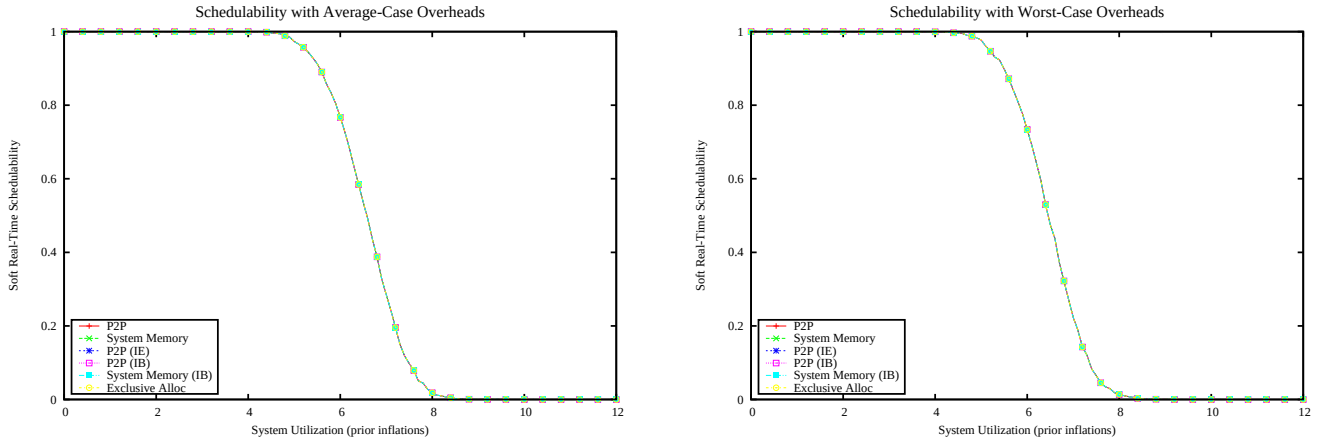

Figure 51: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

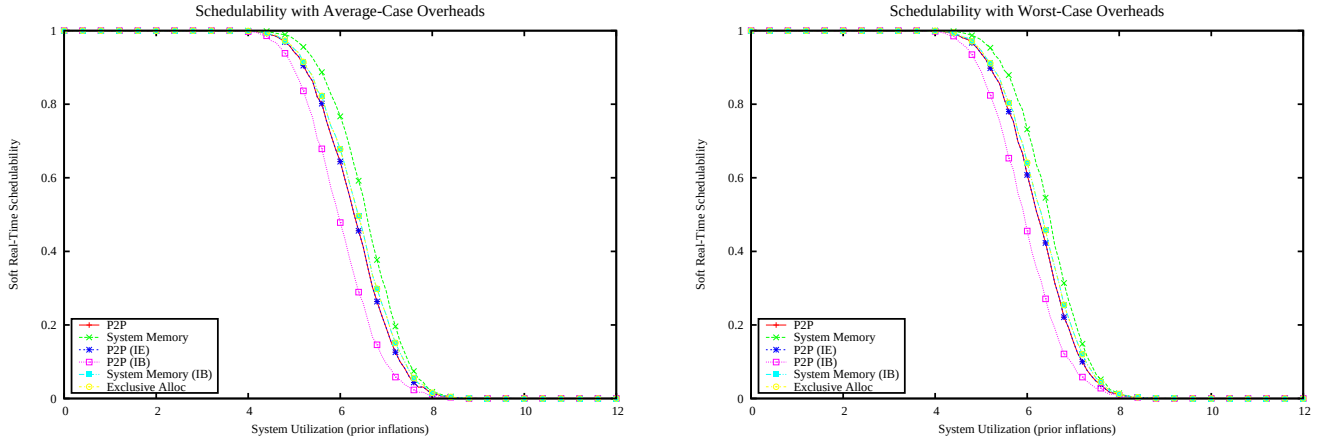

Figure 52: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

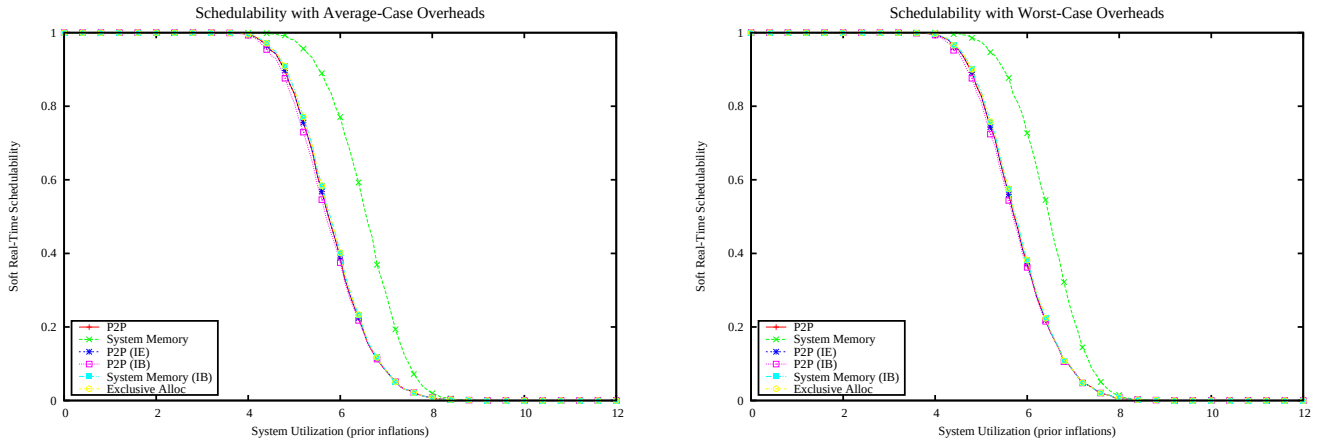

Figure 53: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

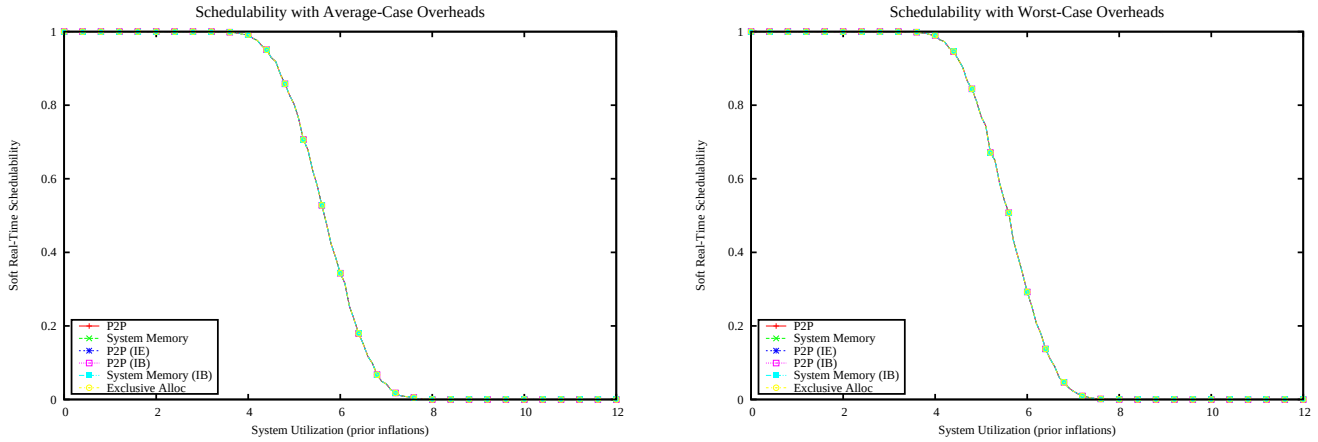

Figure 54: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

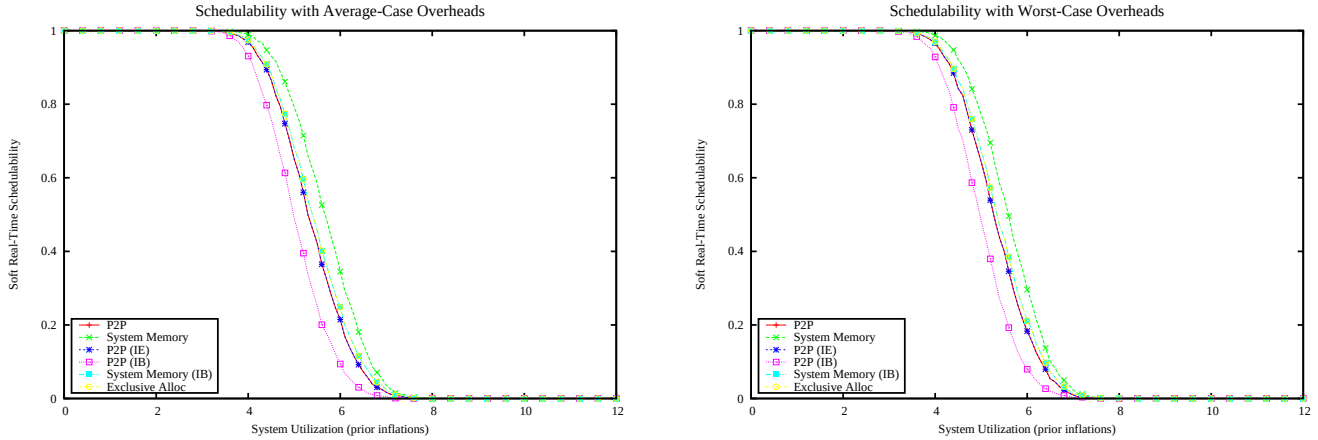

Figure 55: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

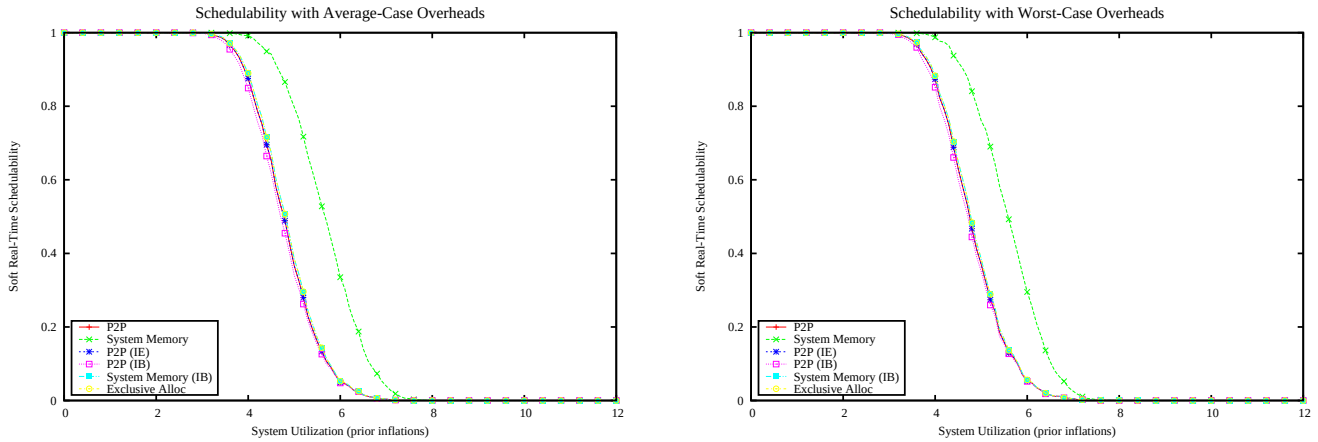

Figure 56: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

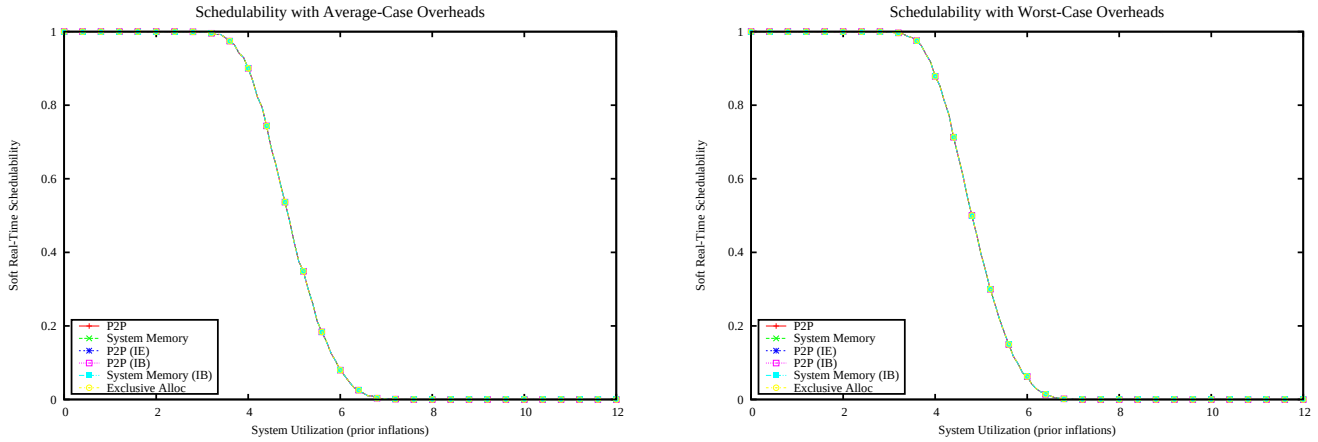

Figure 57: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

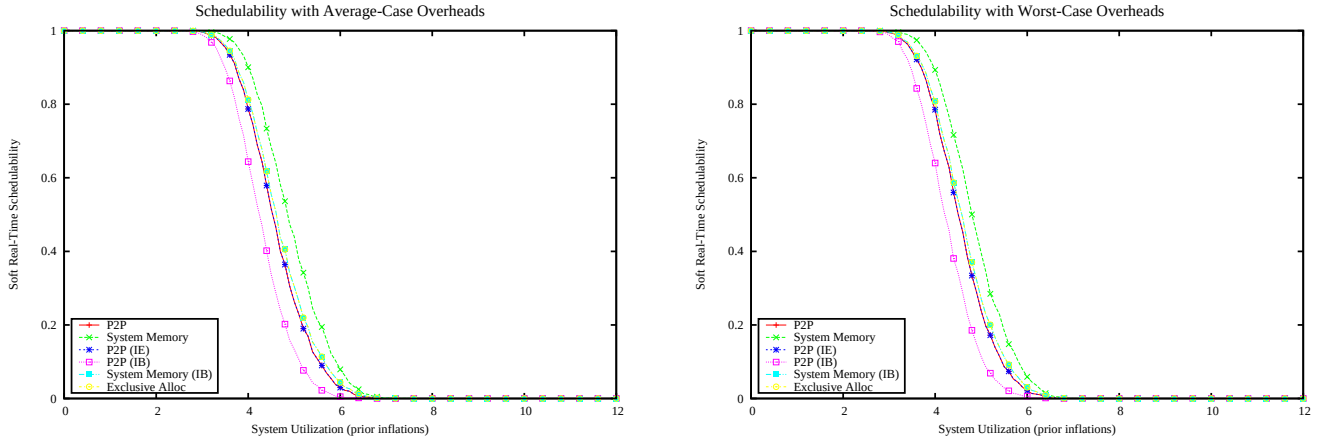

Figure 58: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

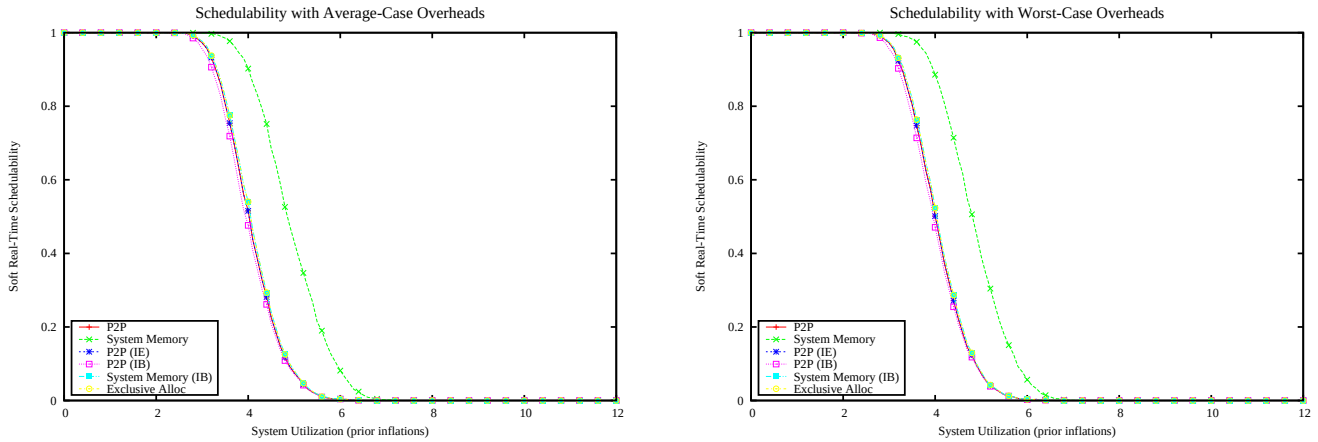

Figure 59: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

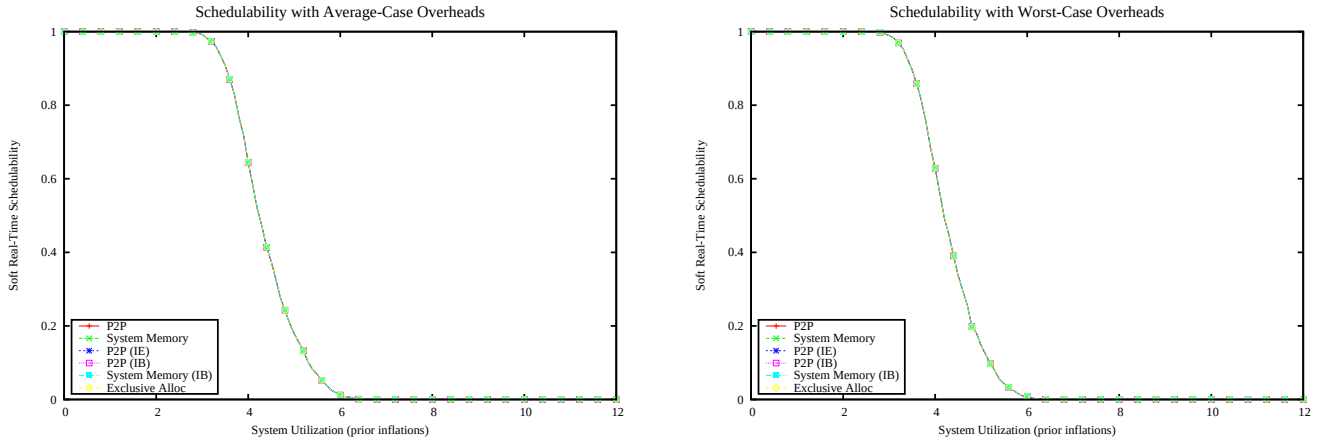

Figure 60: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

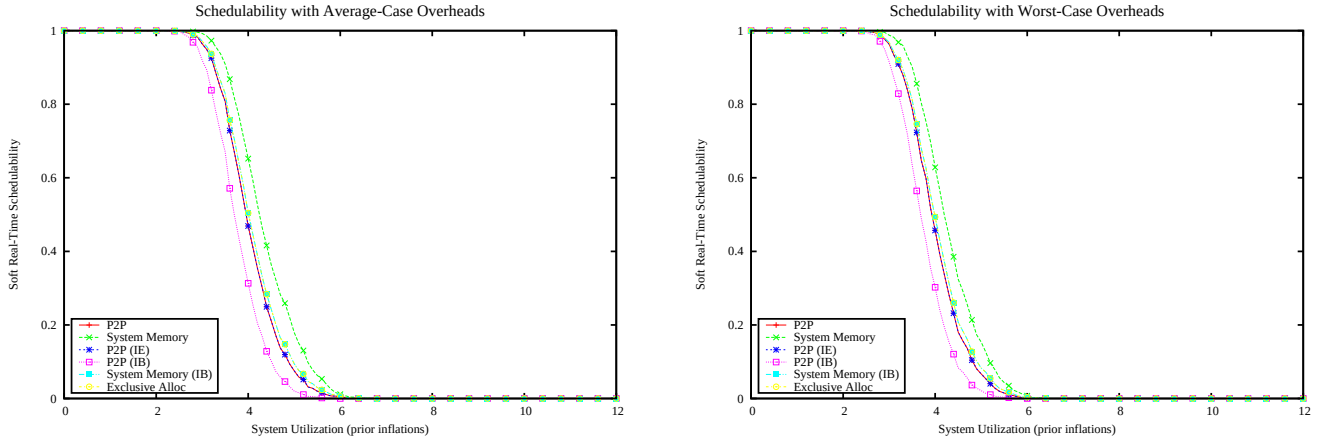

Figure 61: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

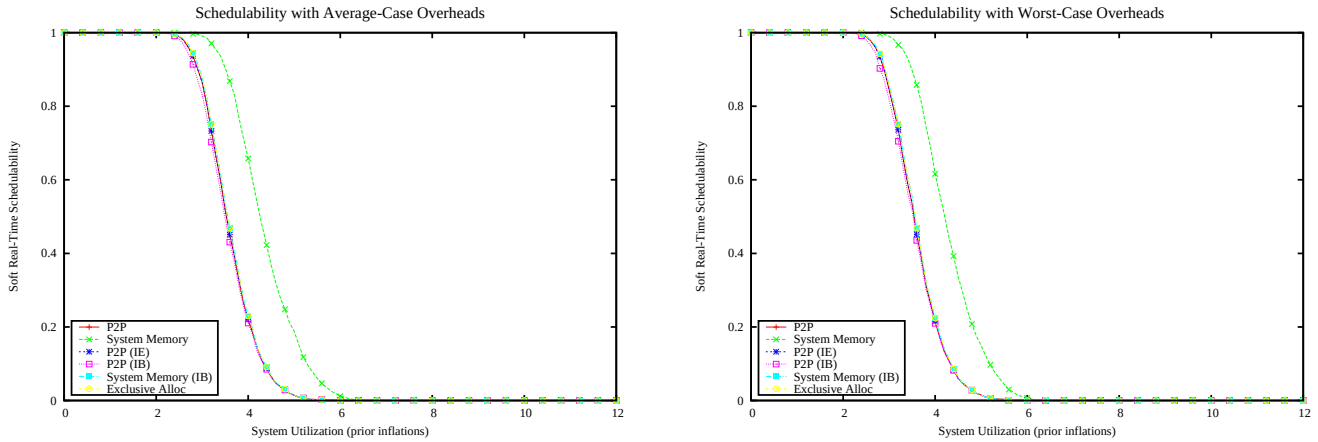

Figure 62: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

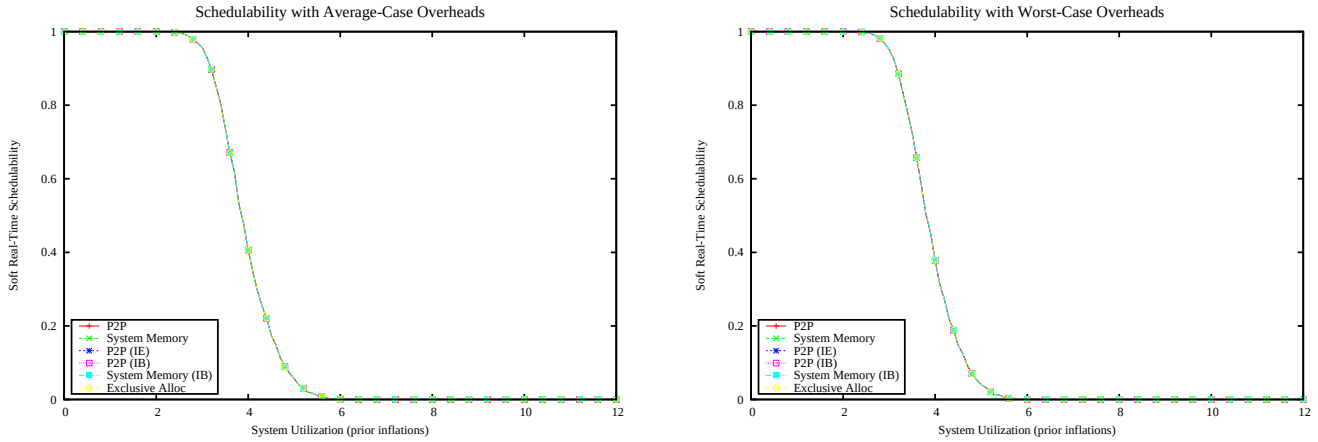

Figure 63: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

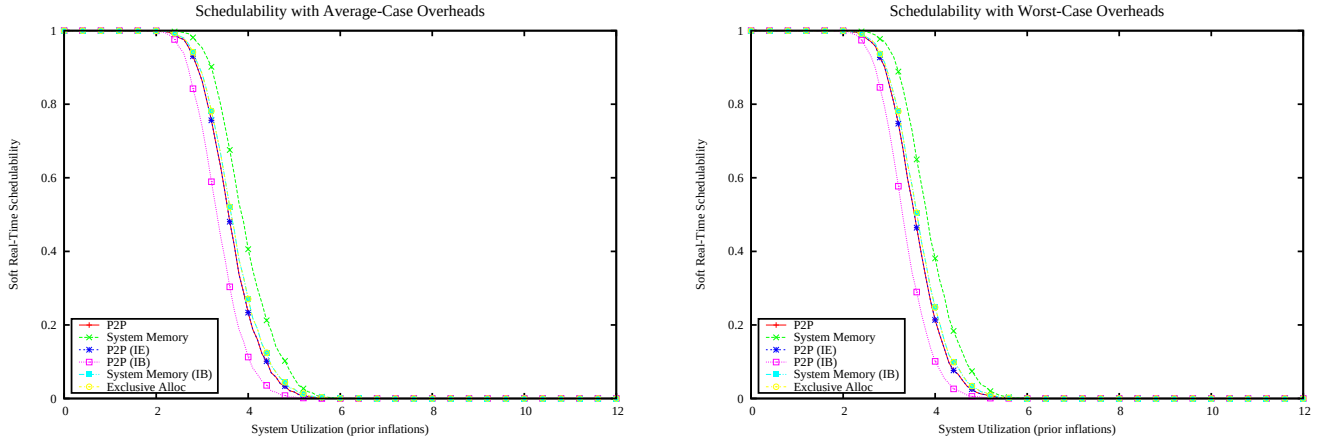

Figure 64: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

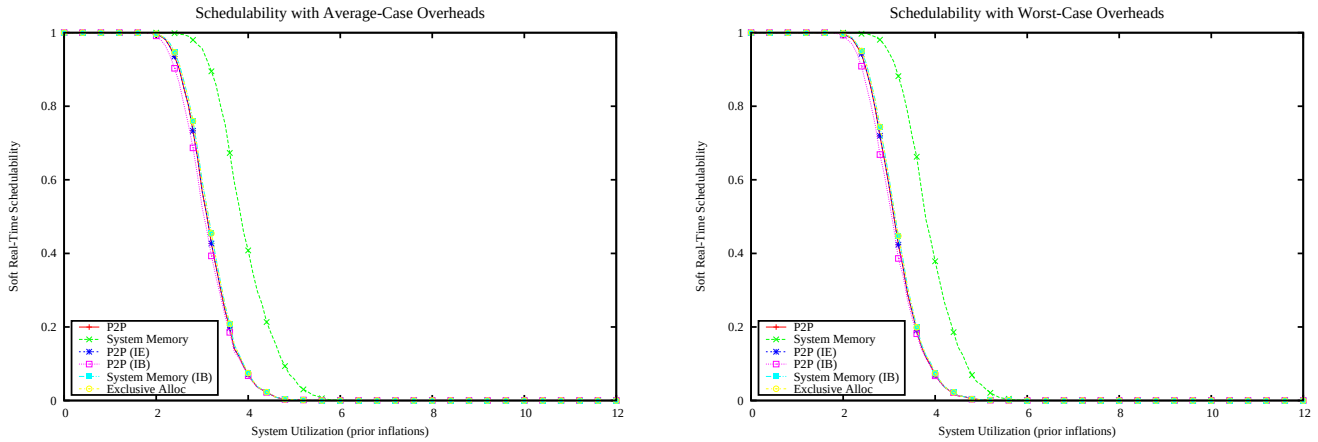

Figure 65: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

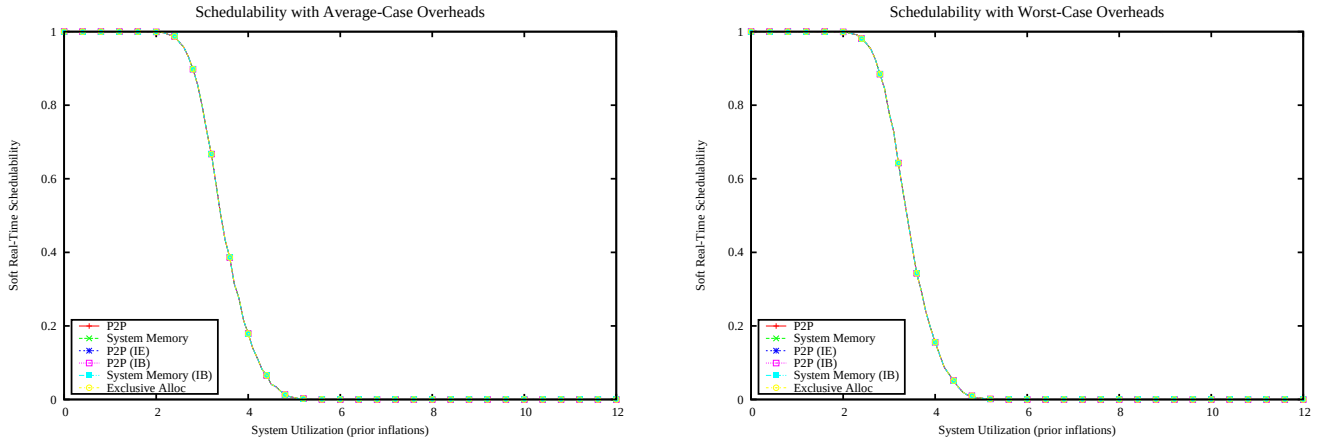

Figure 66: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

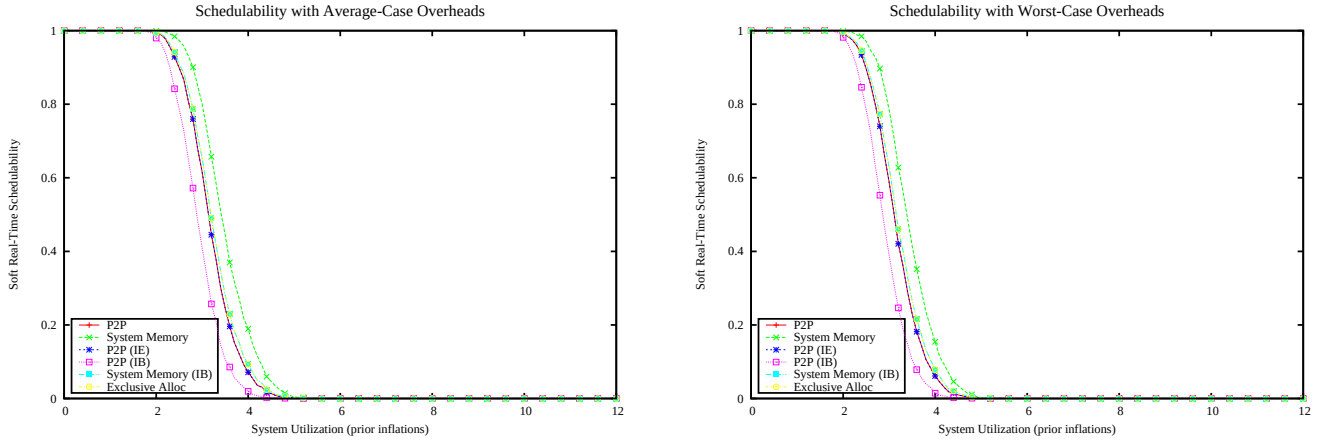

Figure 67: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

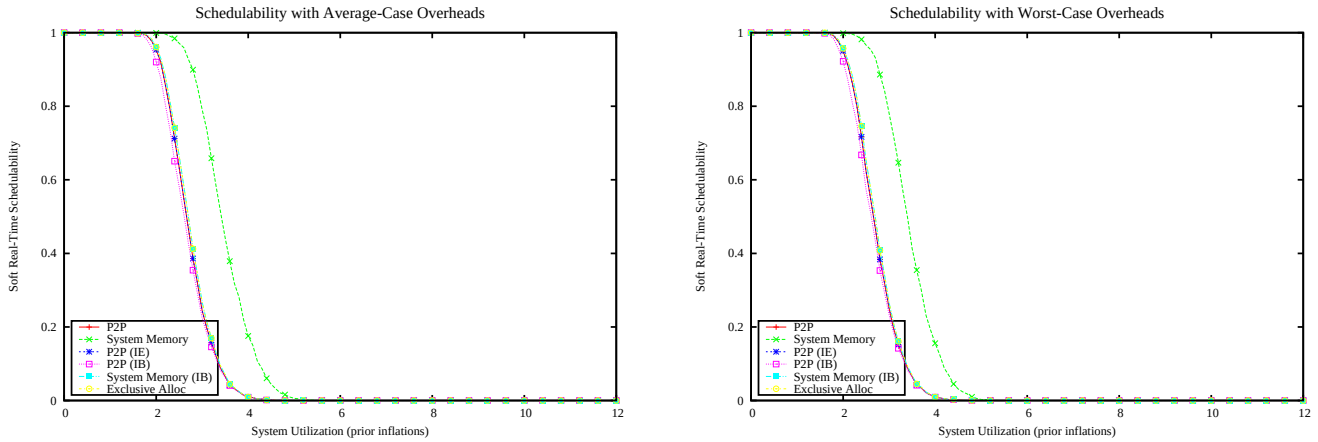

Figure 68: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

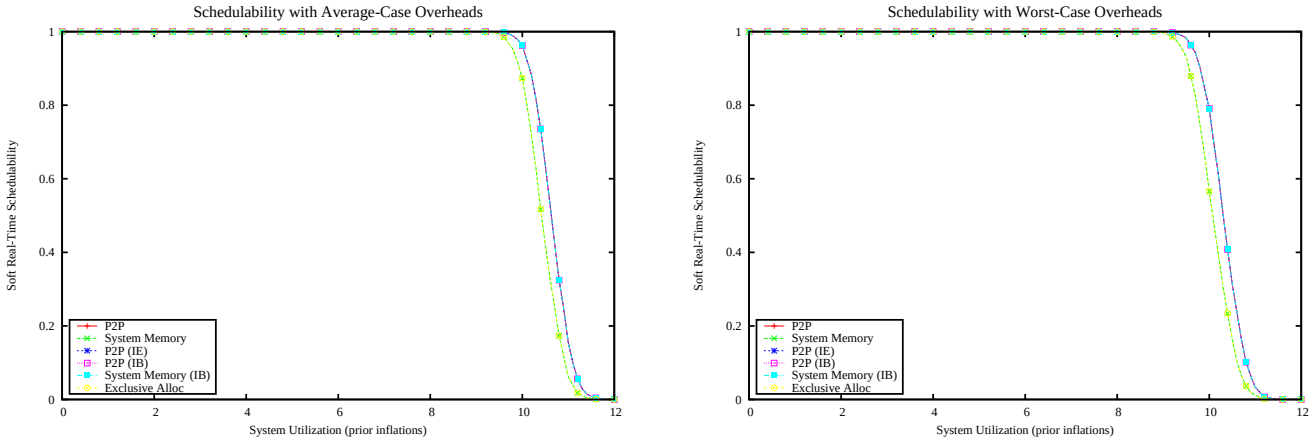

Figure 69: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

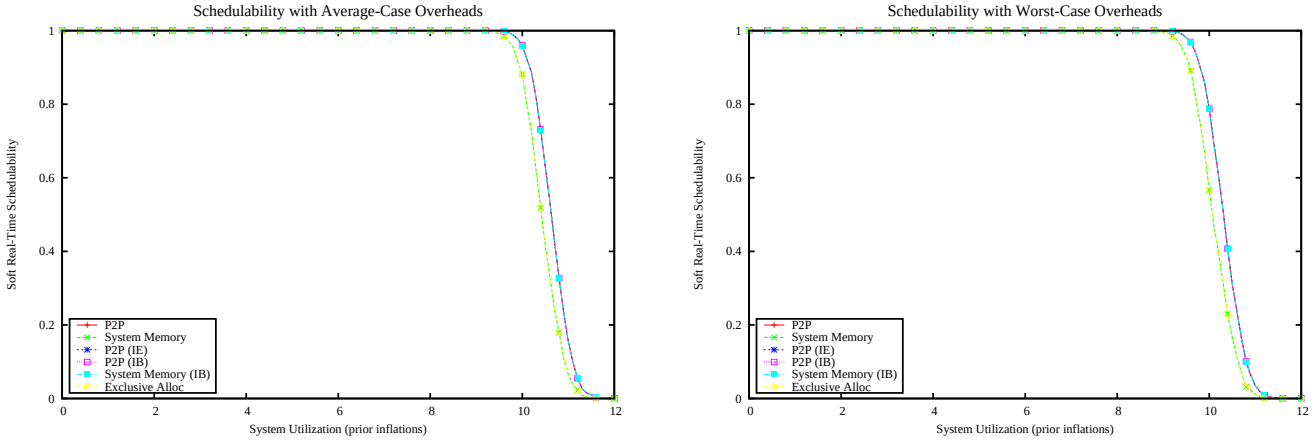

Figure 70: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

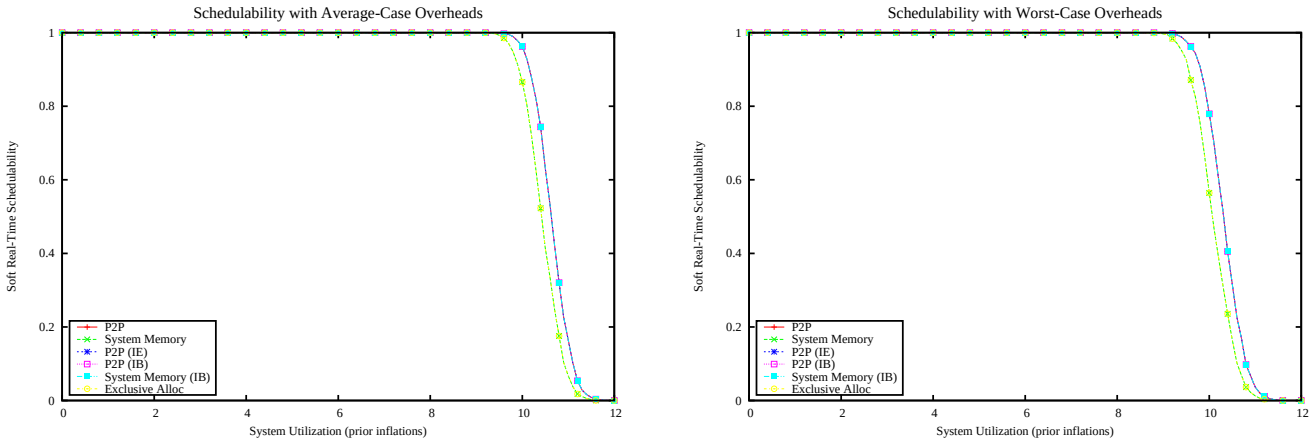

Figure 71: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

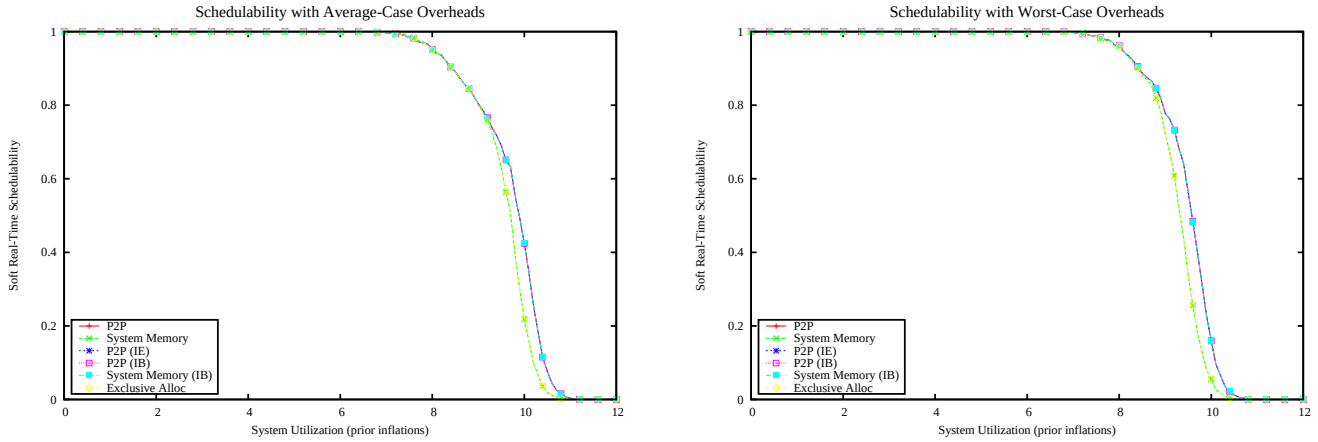

Figure 72: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

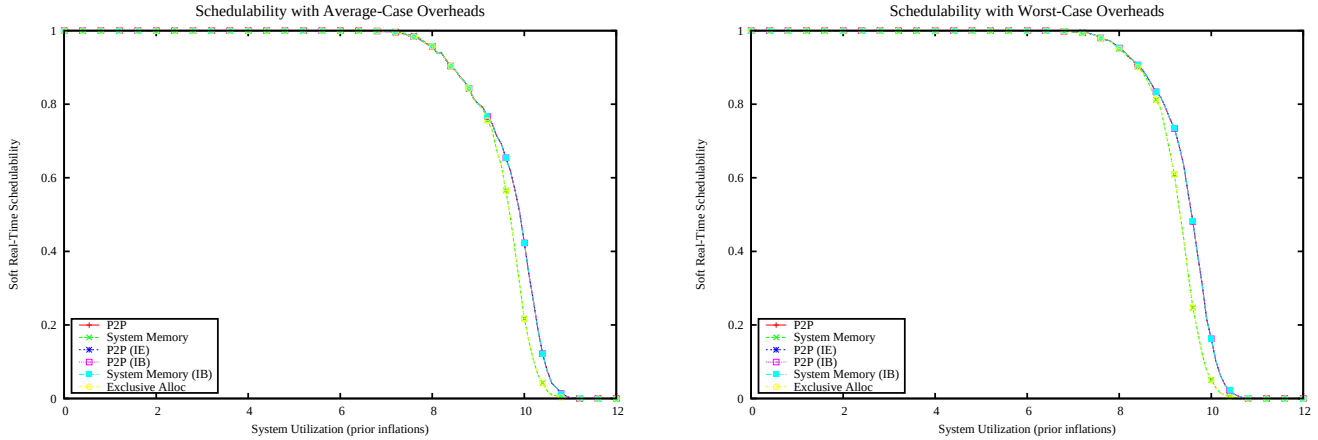

Figure 73: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

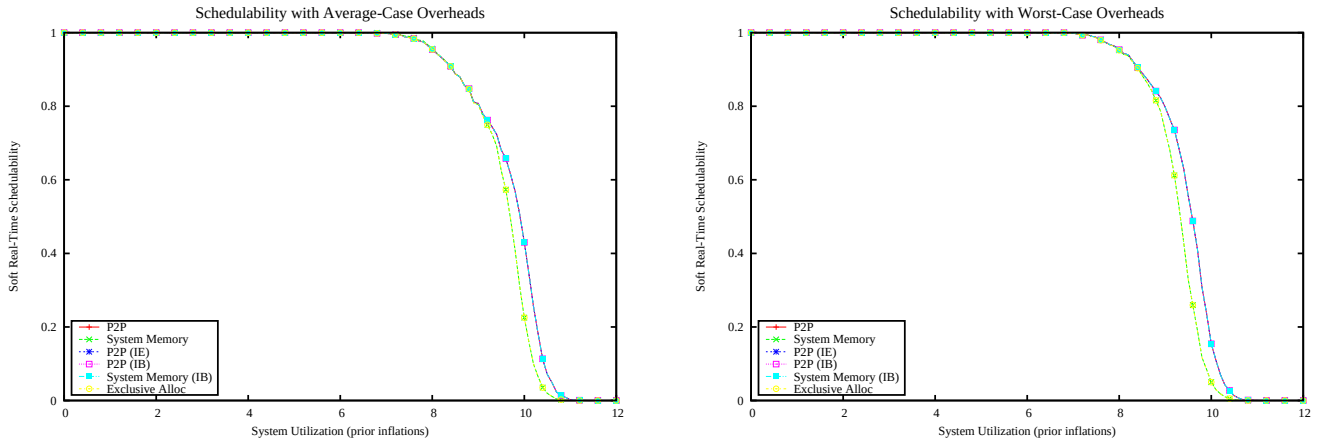

Figure 74: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

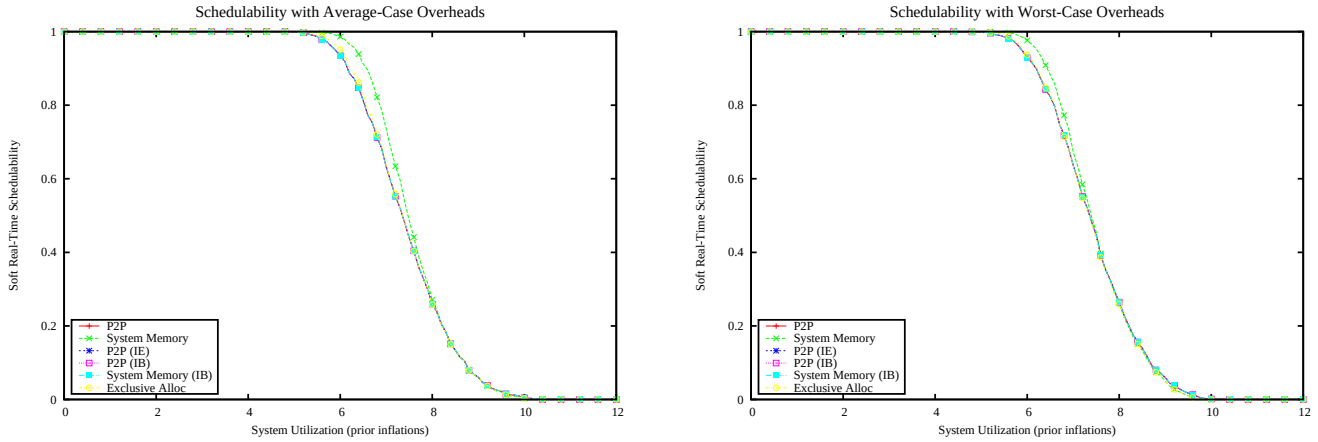

Figure 75: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

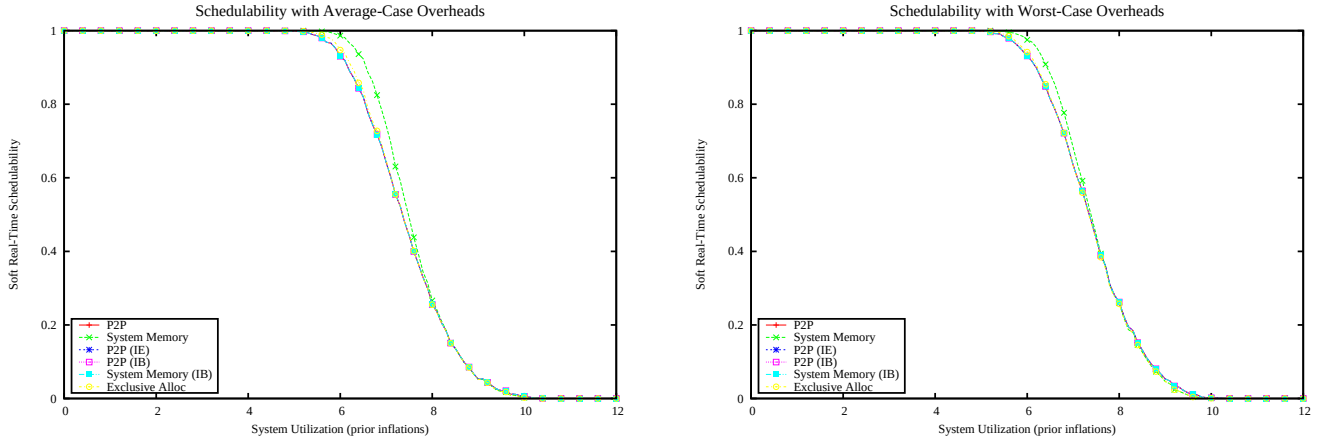

Figure 76: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

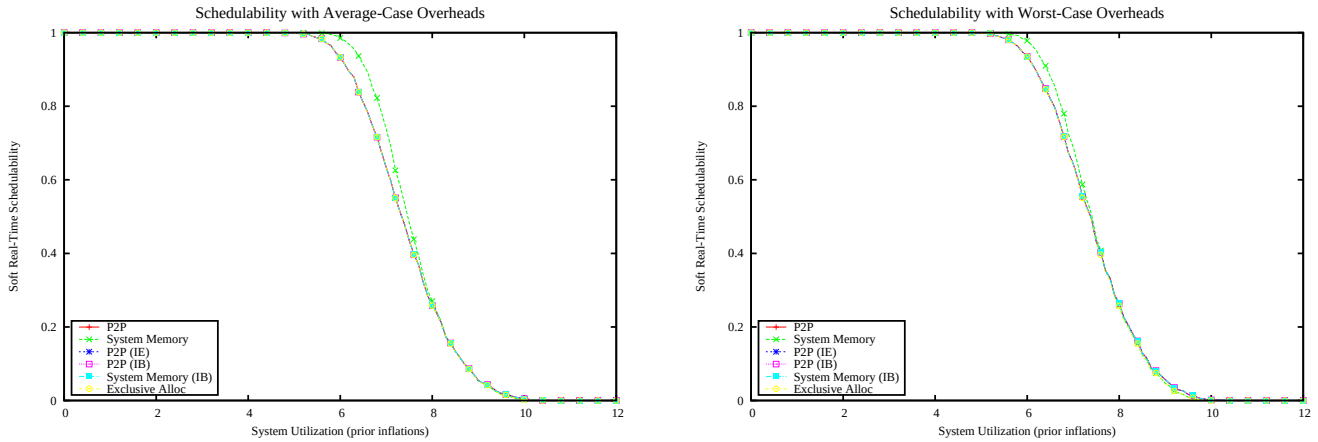

Figure 77: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

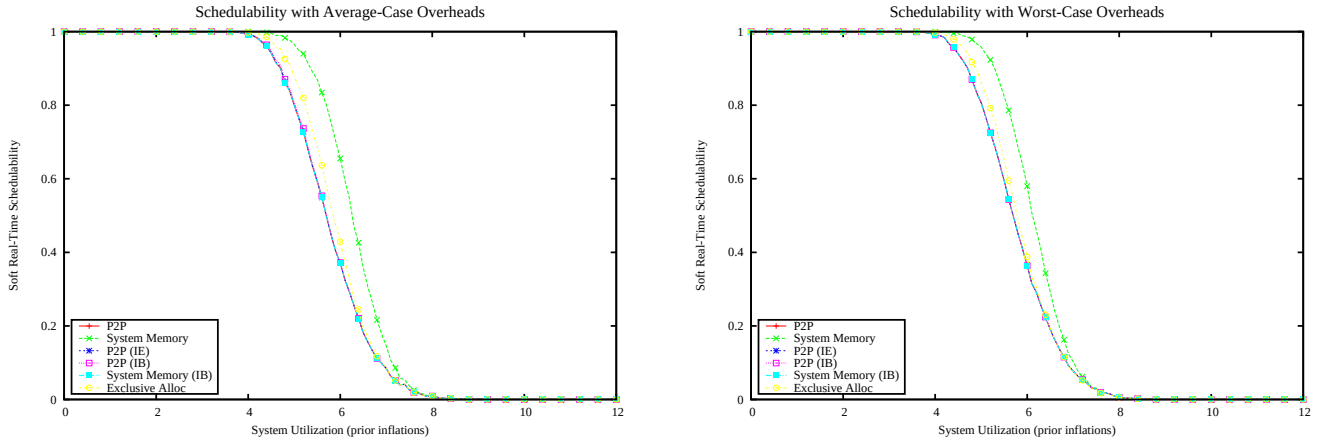

Figure 78: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

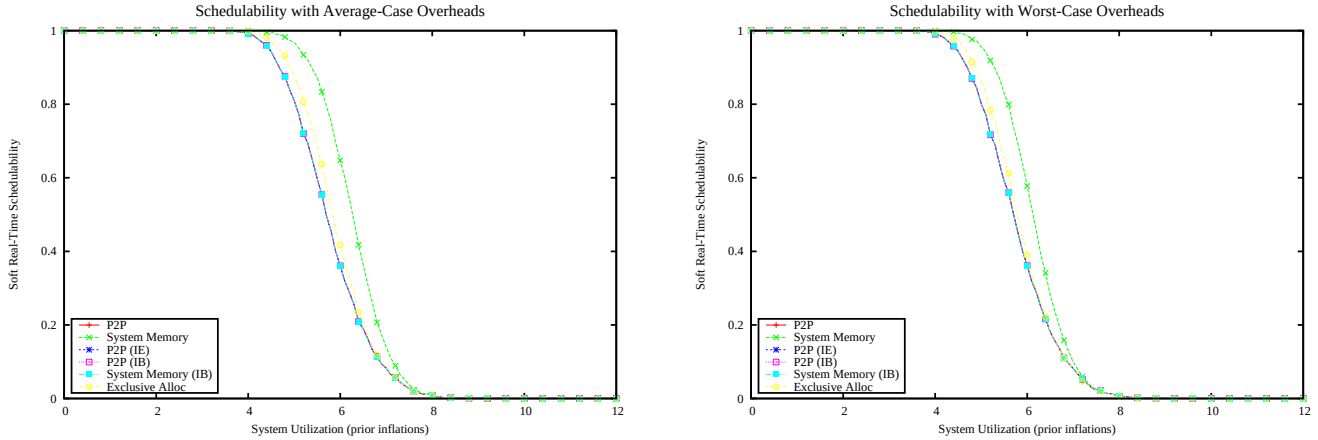

Figure 79: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

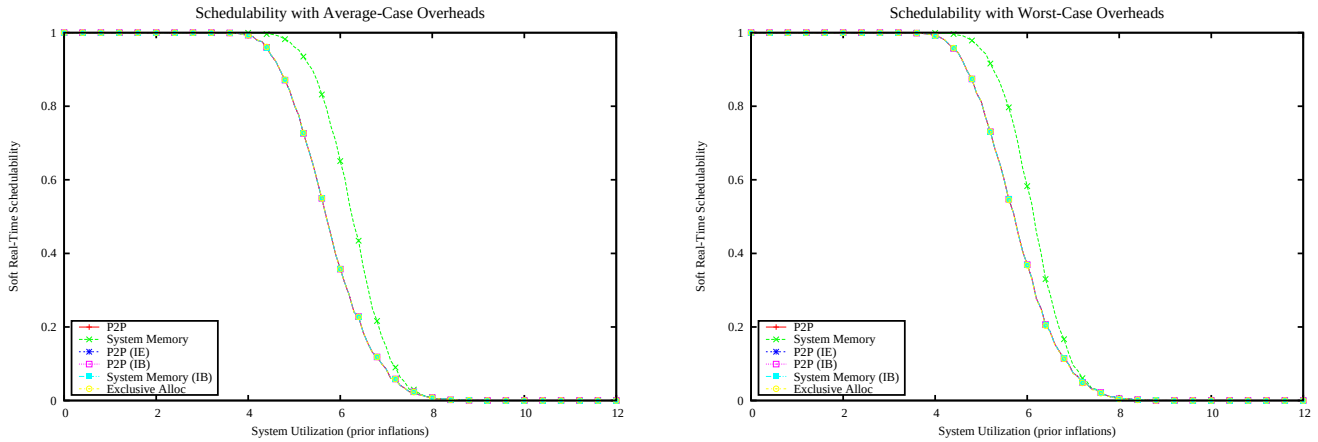

Figure 80: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

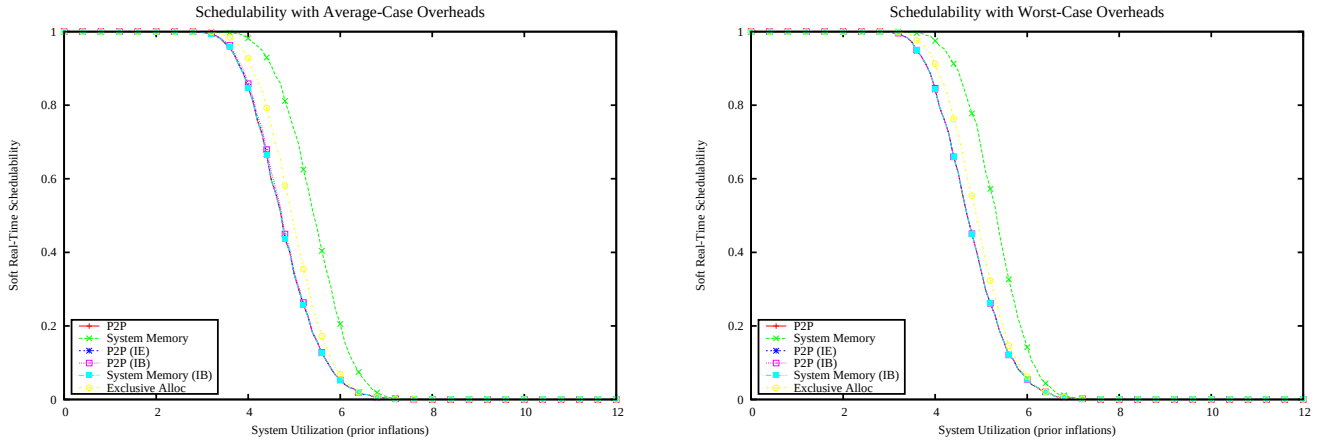

Figure 81: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

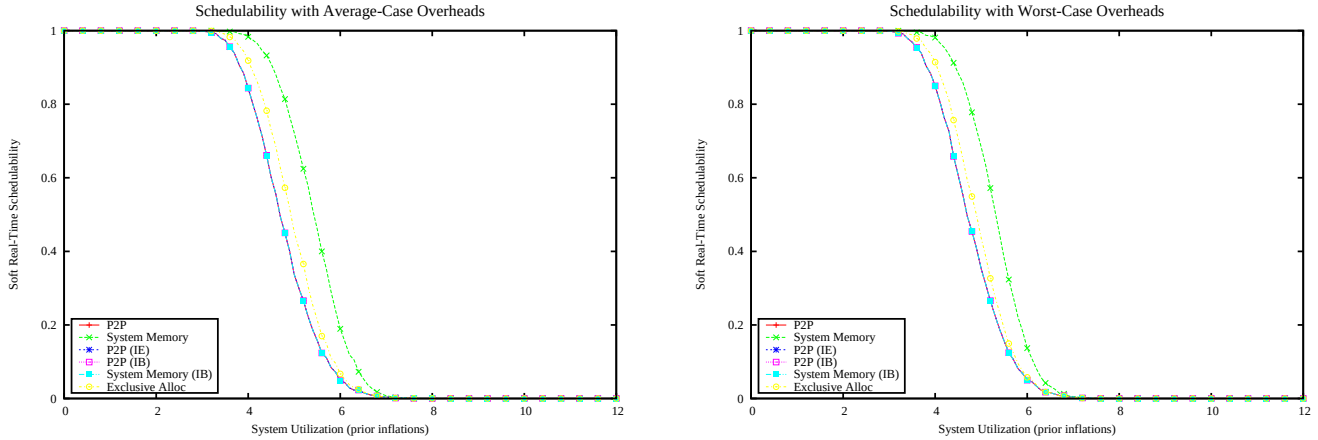

Figure 82: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

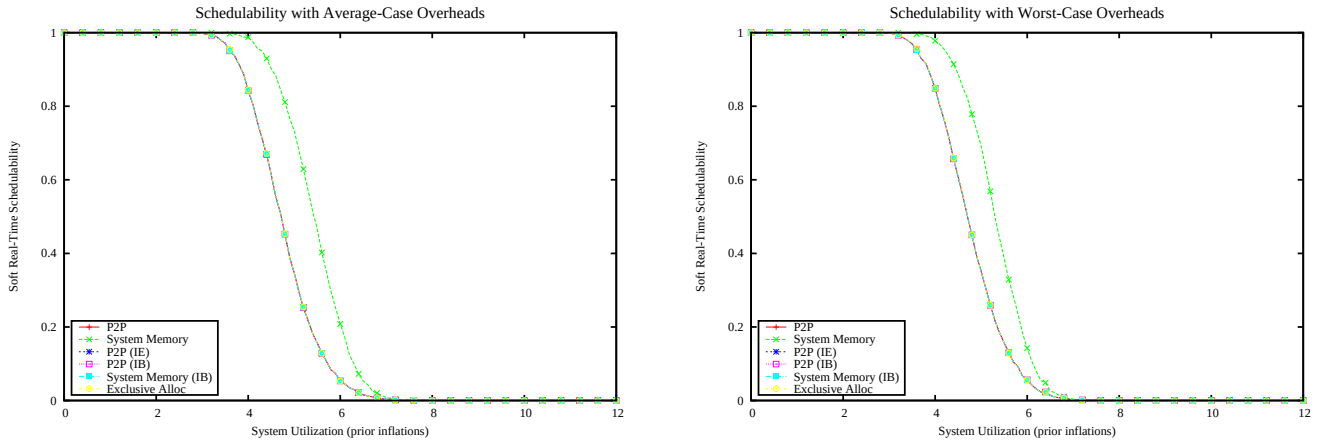

Figure 83: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

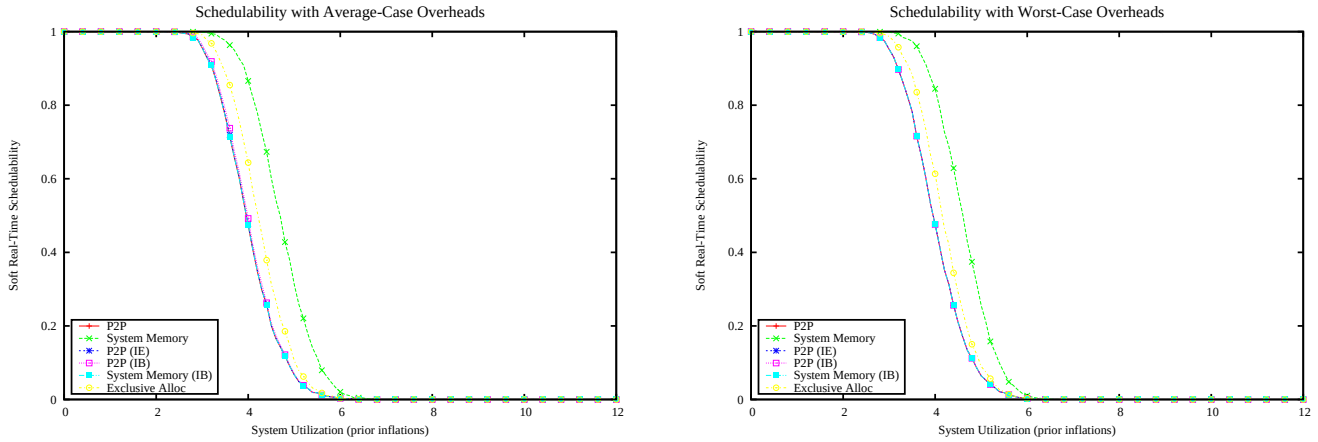

Figure 84: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

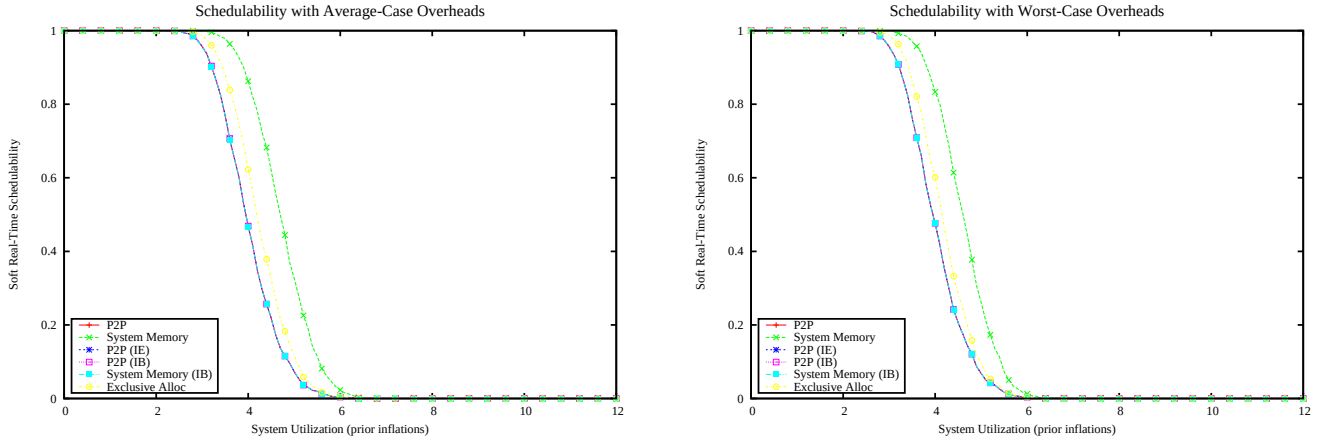

Figure 85: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

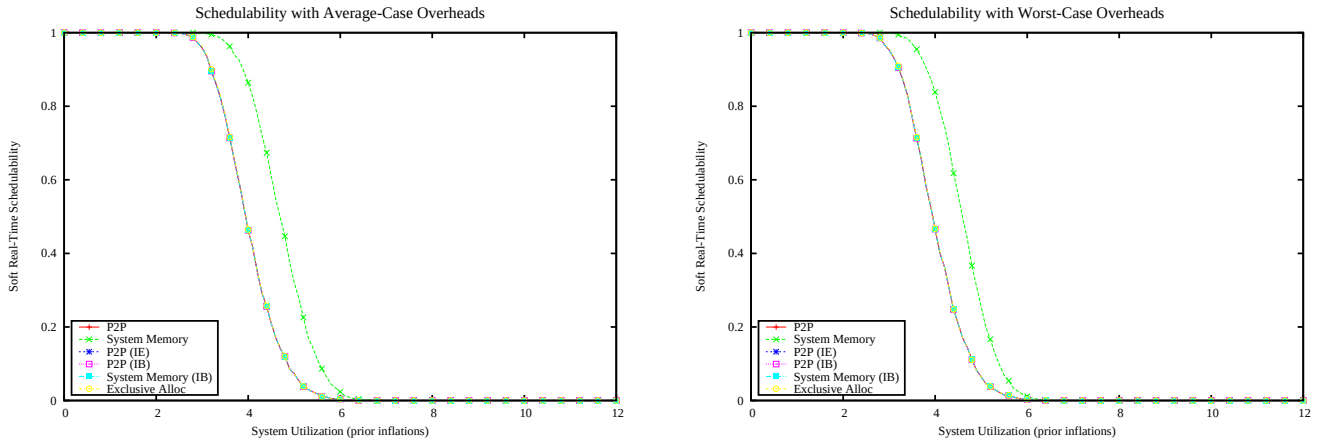

Figure 86: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

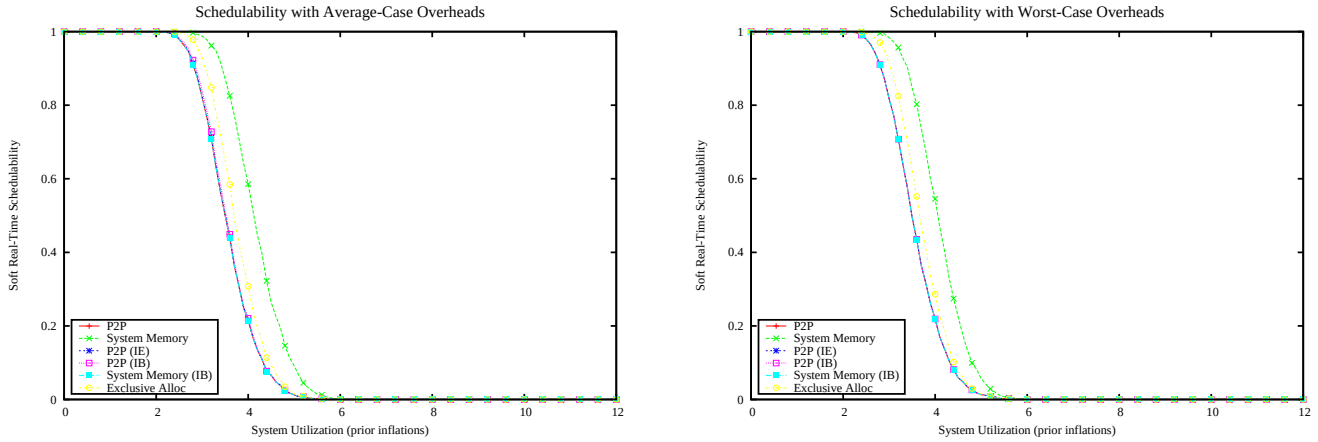

Figure 87: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

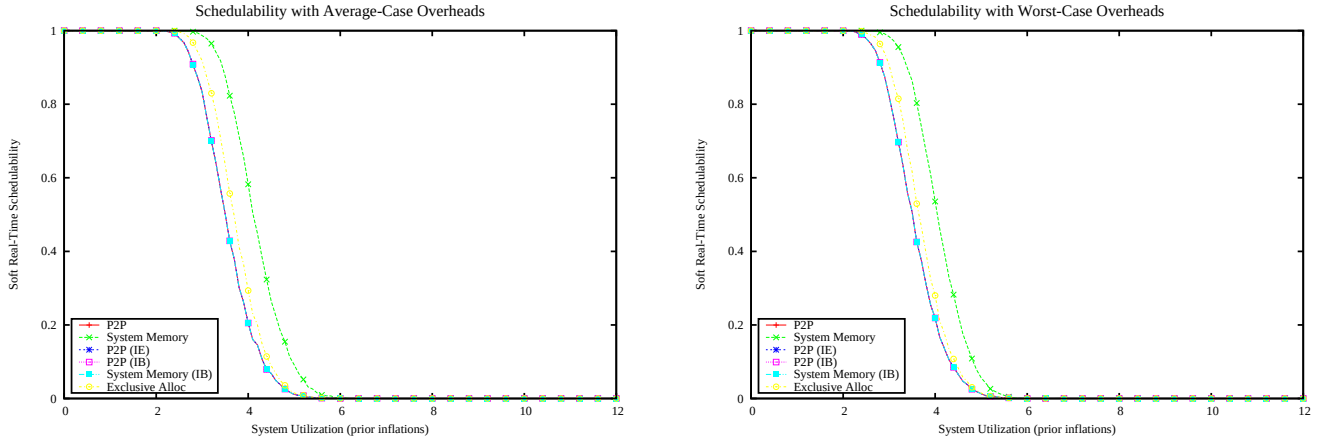

Figure 88: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

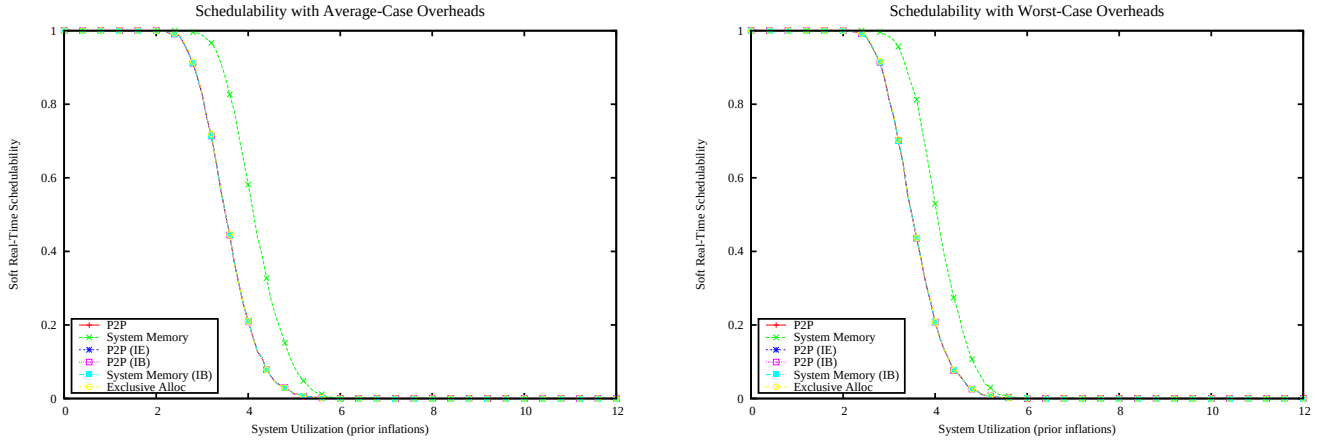

Figure 89: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

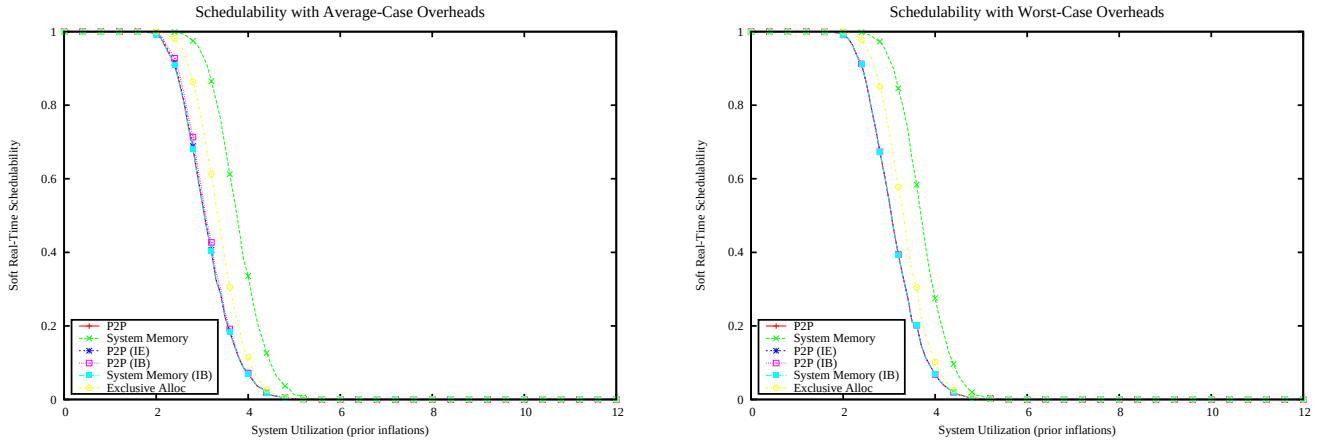

Figure 90: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

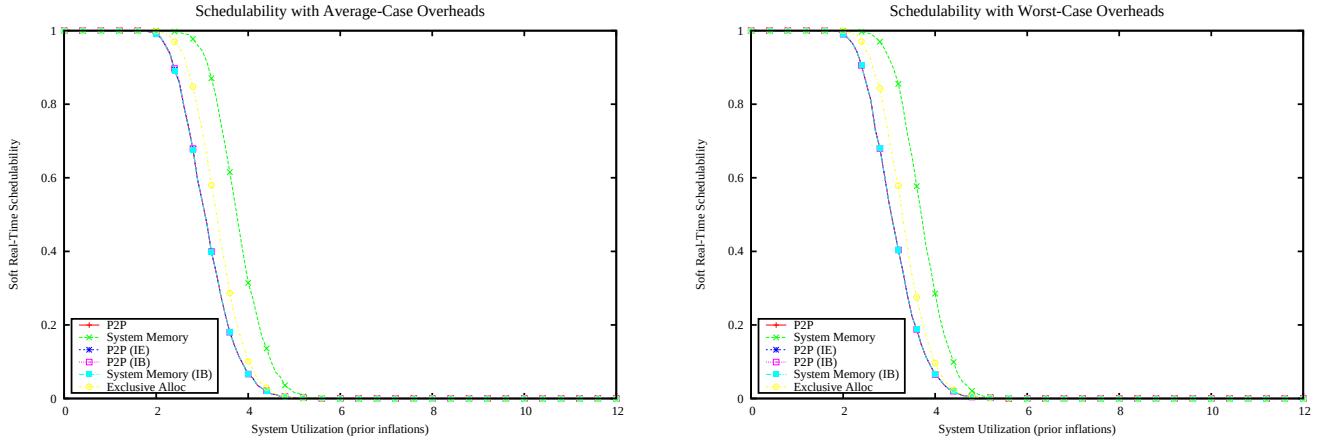

Figure 91: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

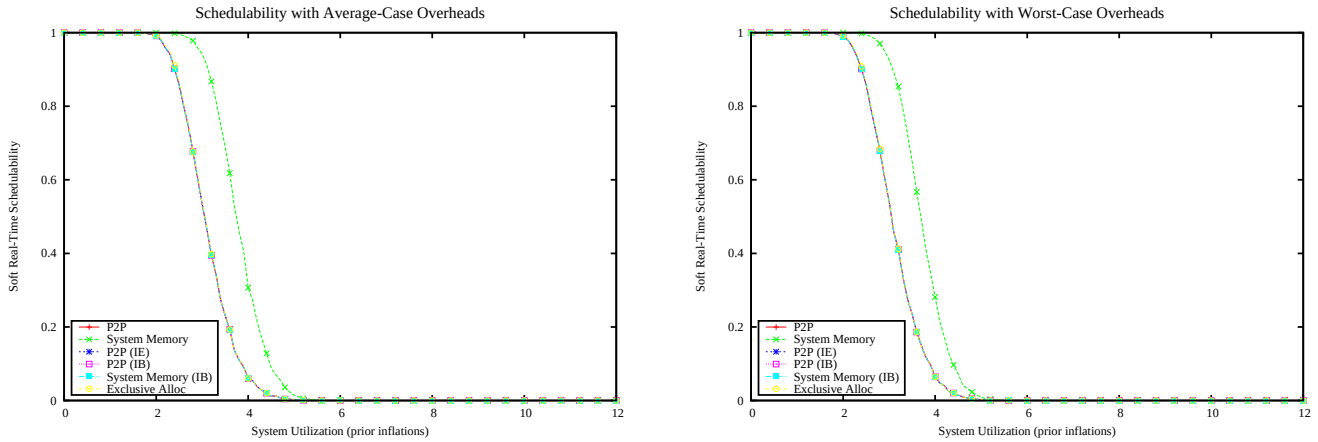

Figure 92: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

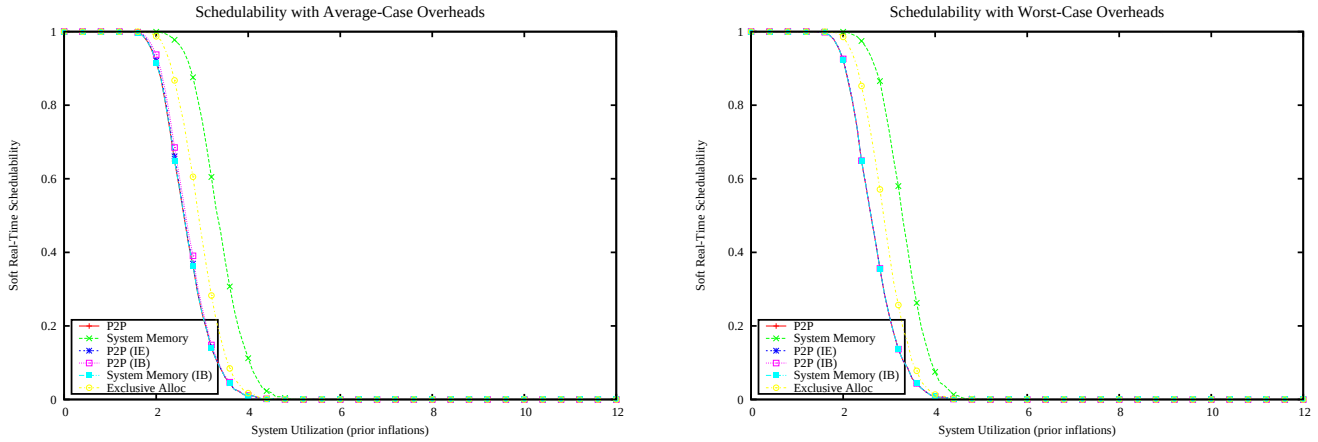

Figure 93: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

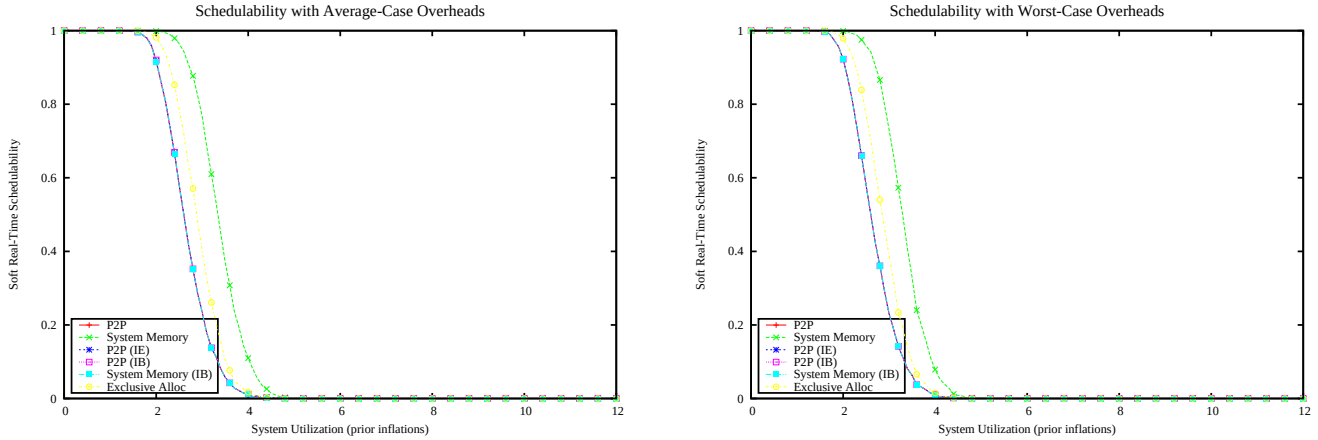

Figure 94: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

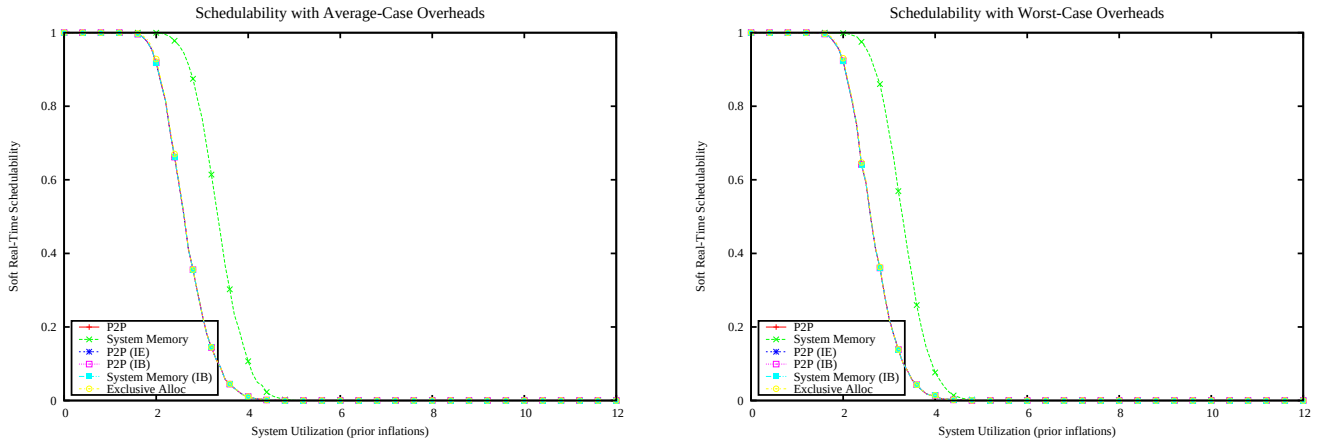

Figure 95: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

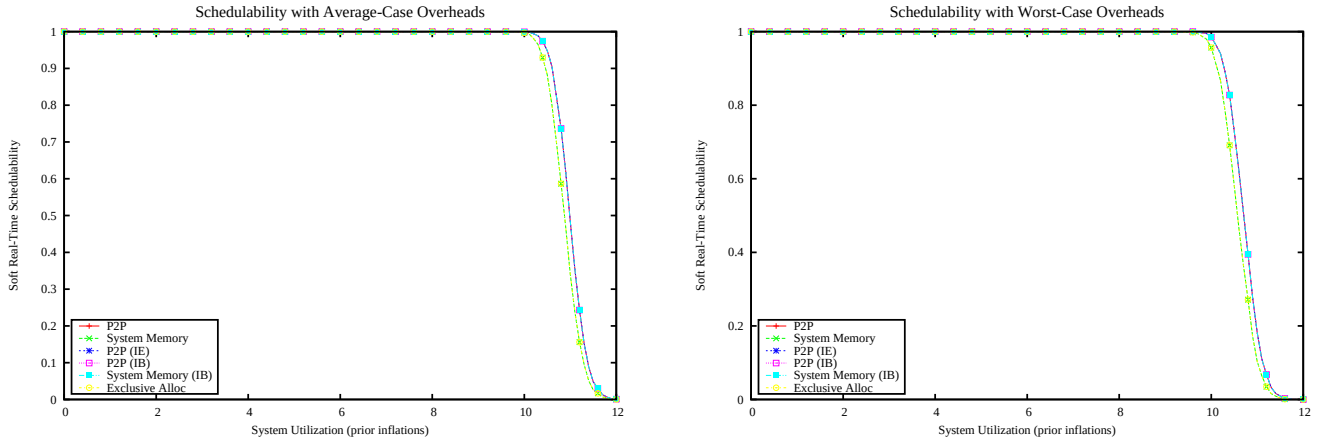

Figure 96: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

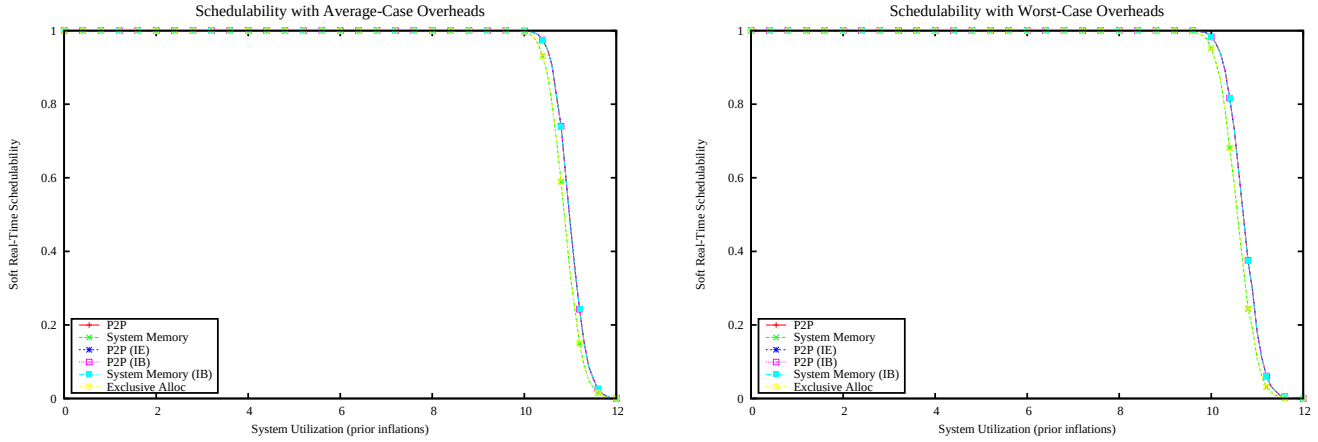

Figure 97: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

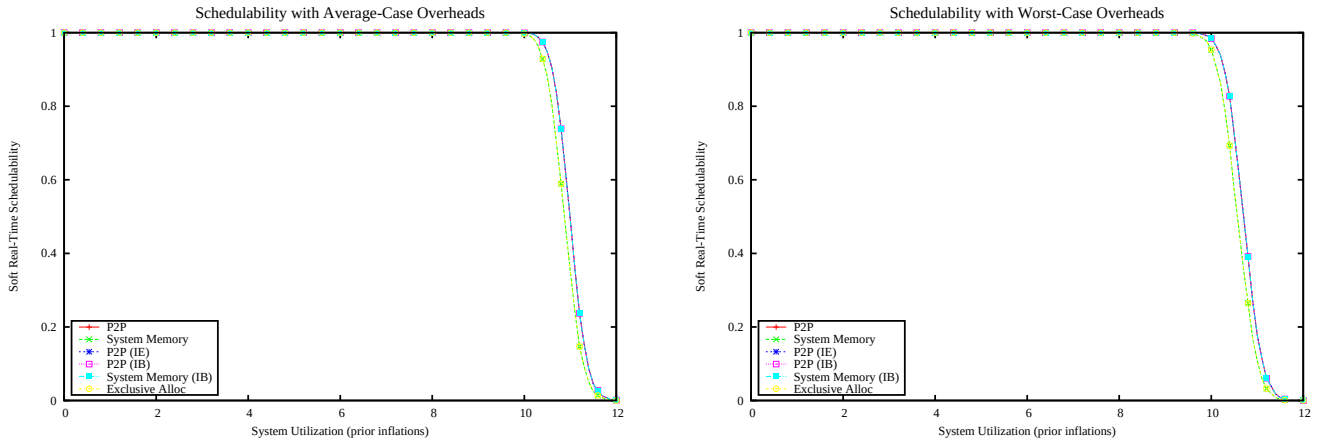

Figure 98: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

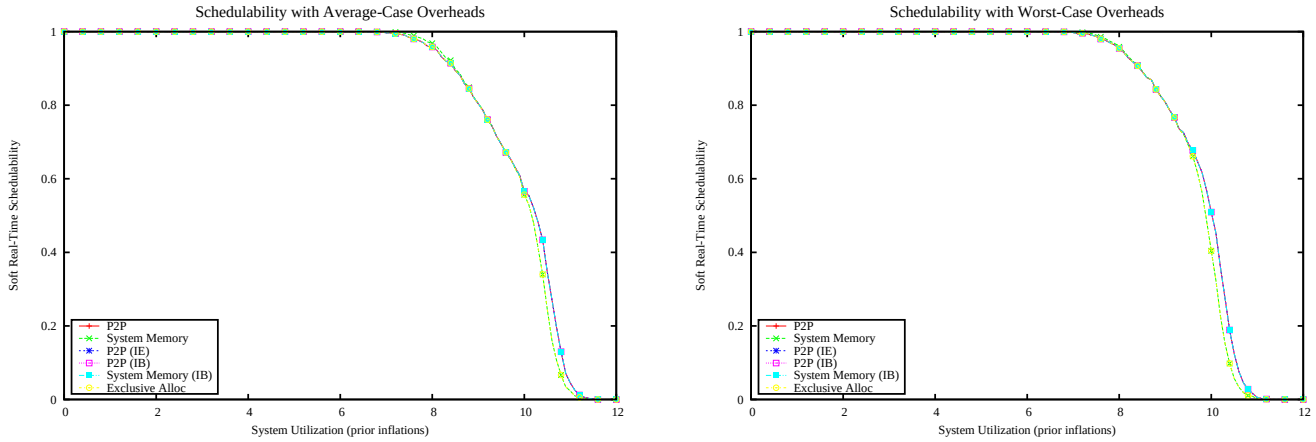

Figure 99: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

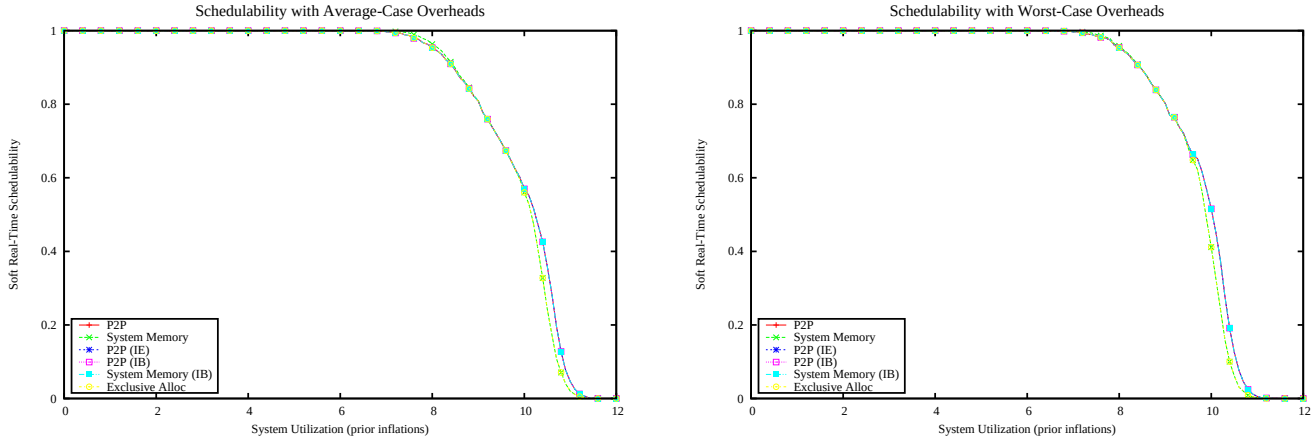

Figure 100: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

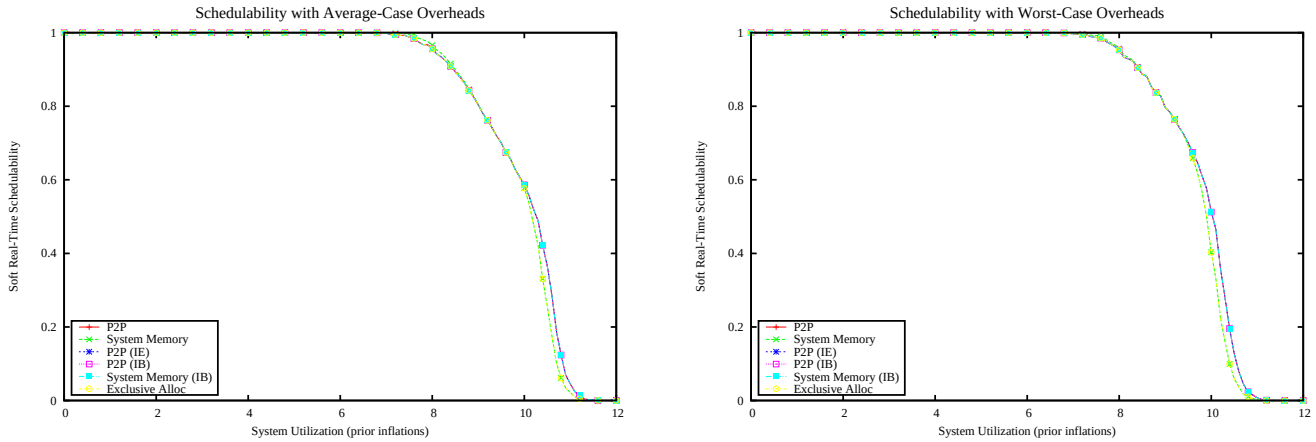

Figure 101: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

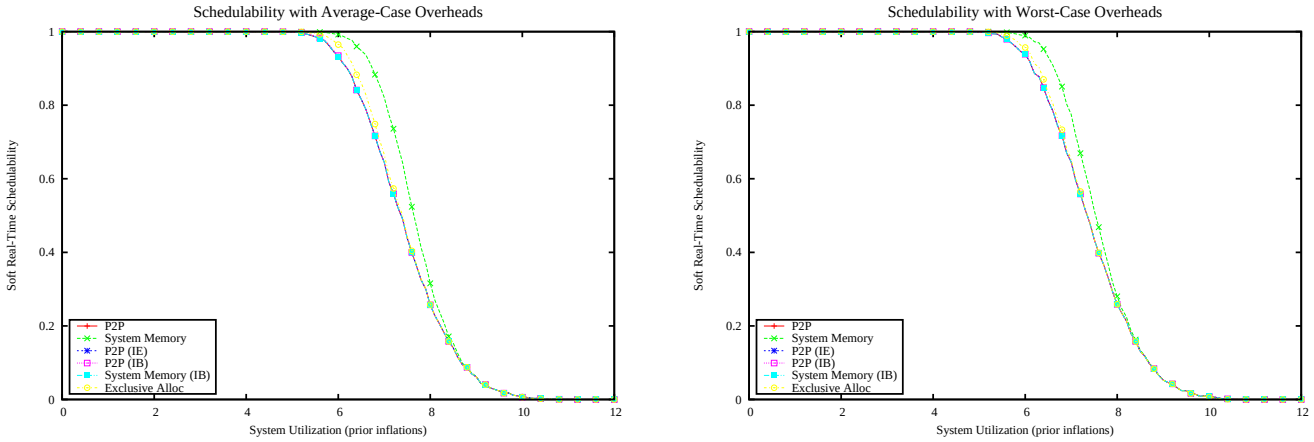

Figure 102: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

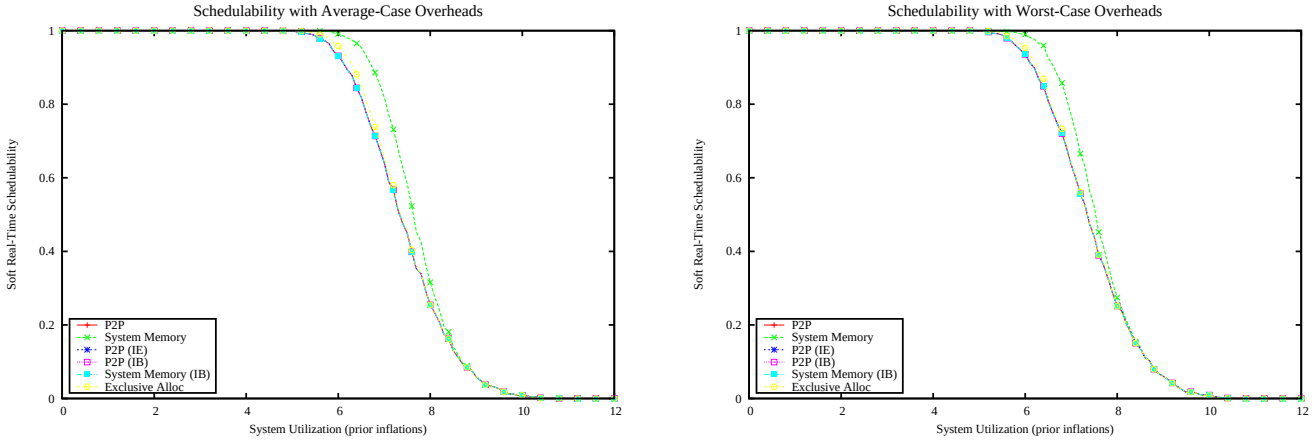

Figure 103: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

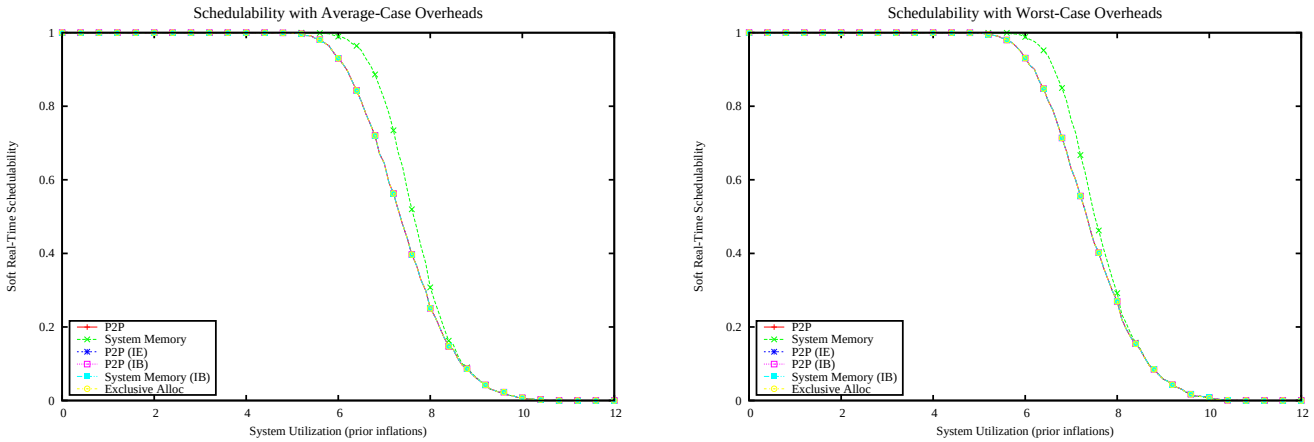

Figure 104: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

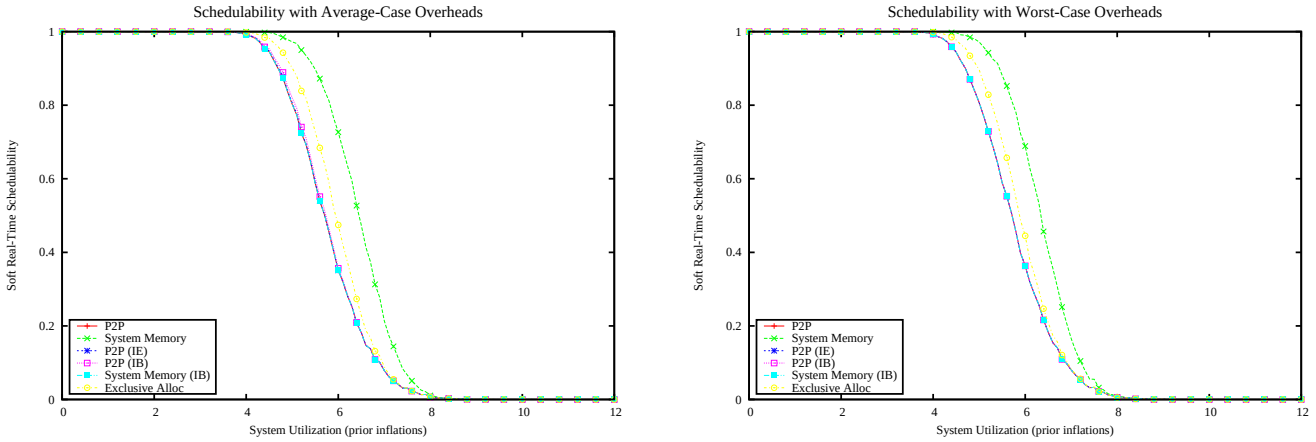

Figure 105: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

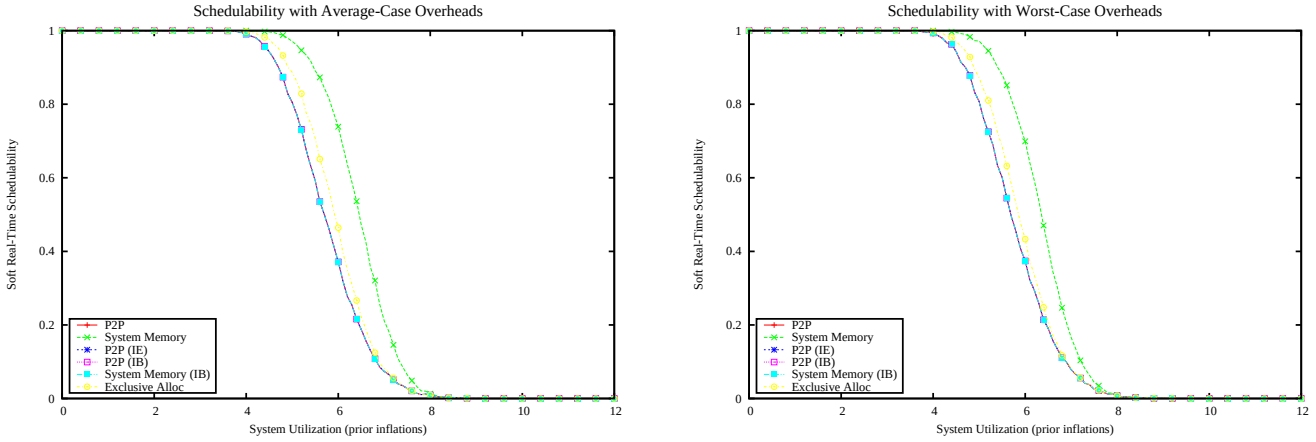

Figure 106: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

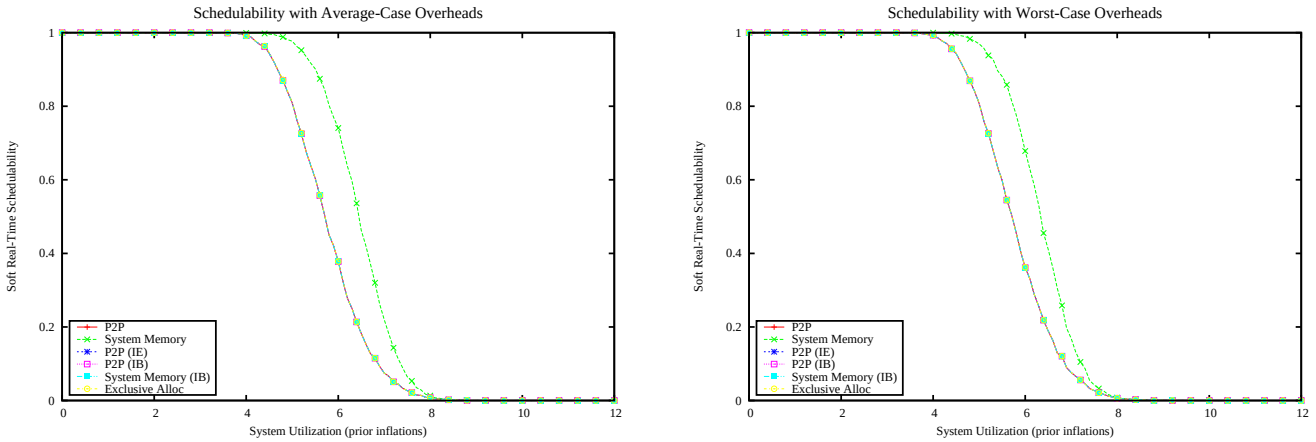

Figure 107: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

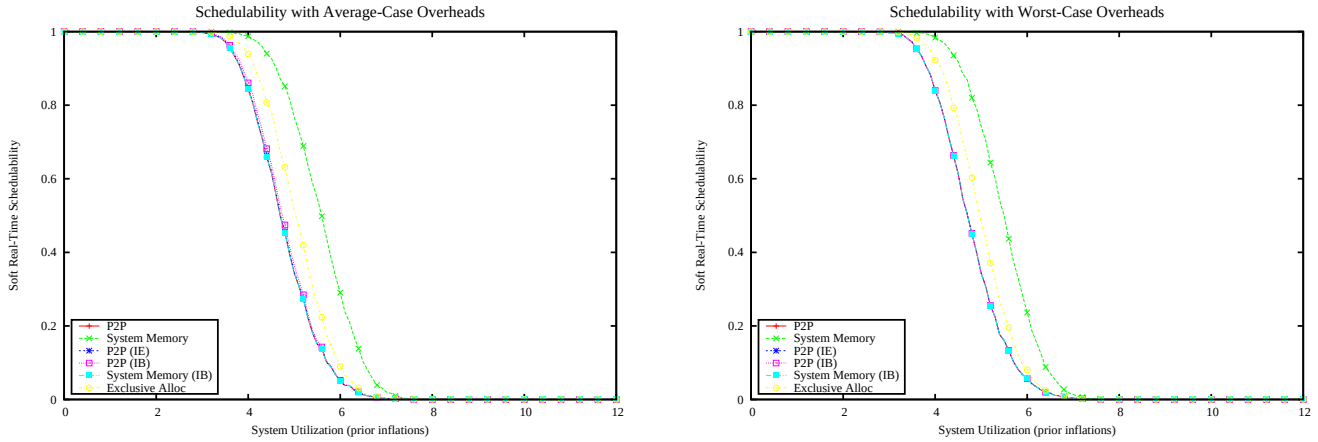

Figure 108: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

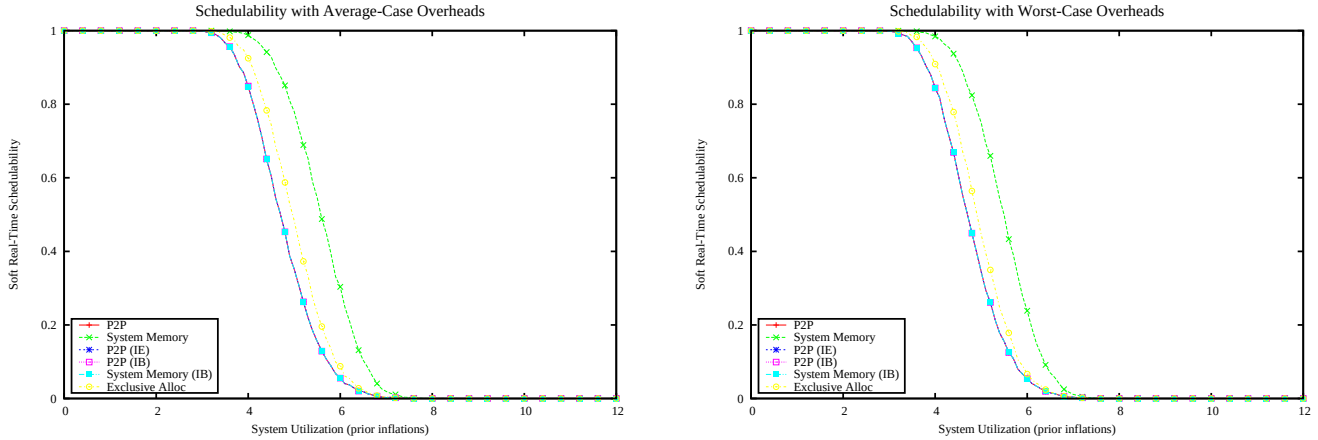

Figure 109: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

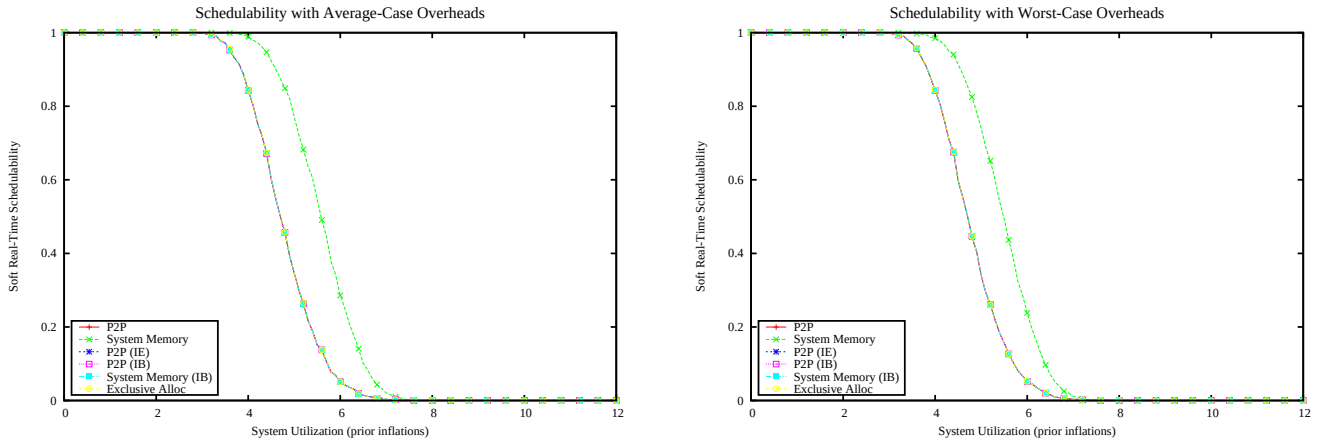

Figure 110: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

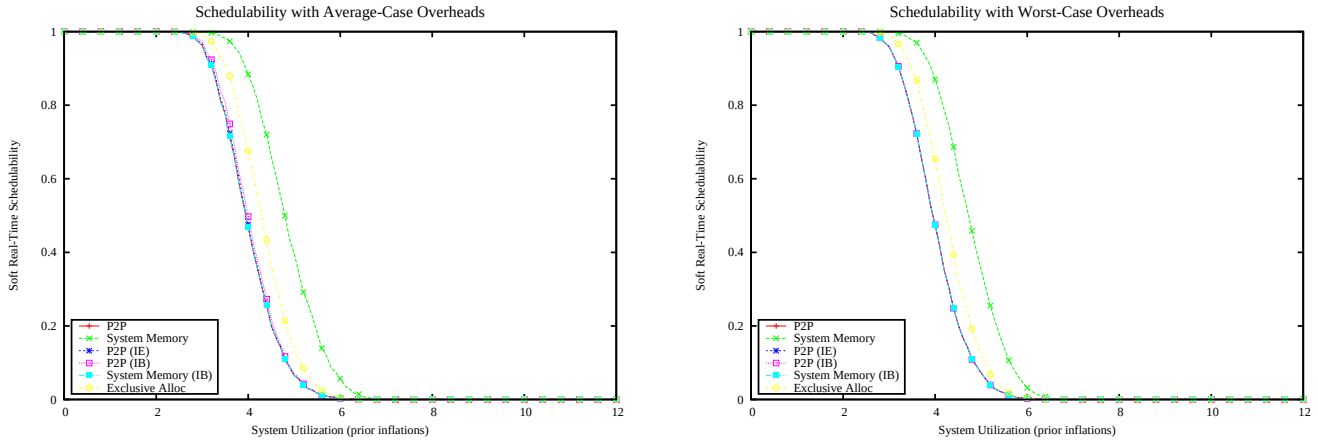

Figure 111: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

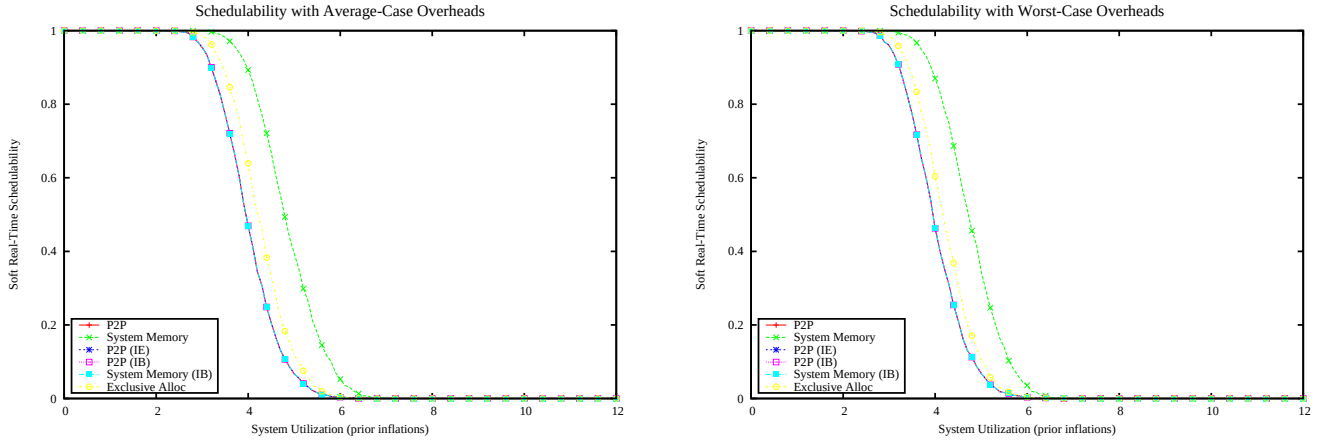

Figure 112: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

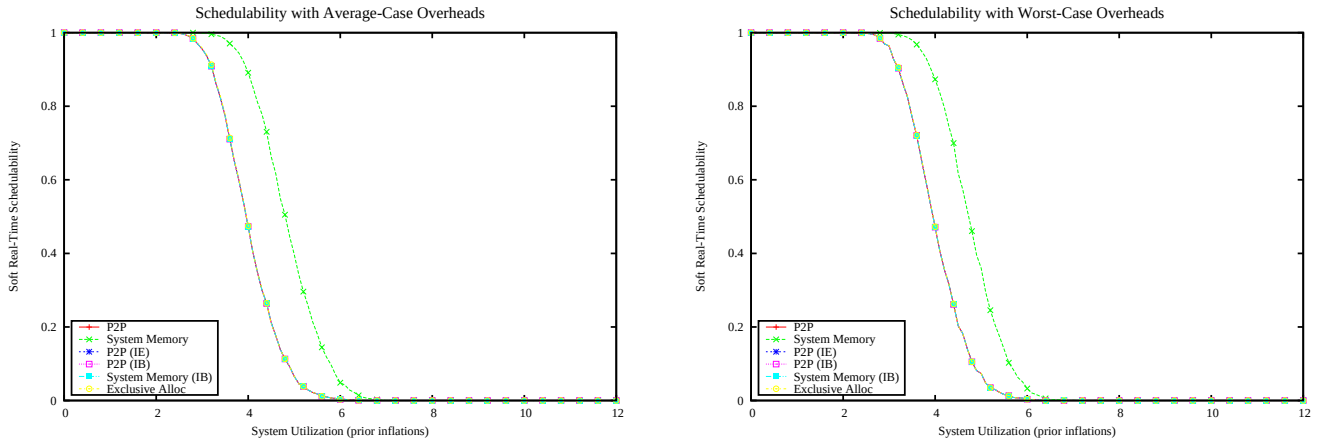

Figure 113: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

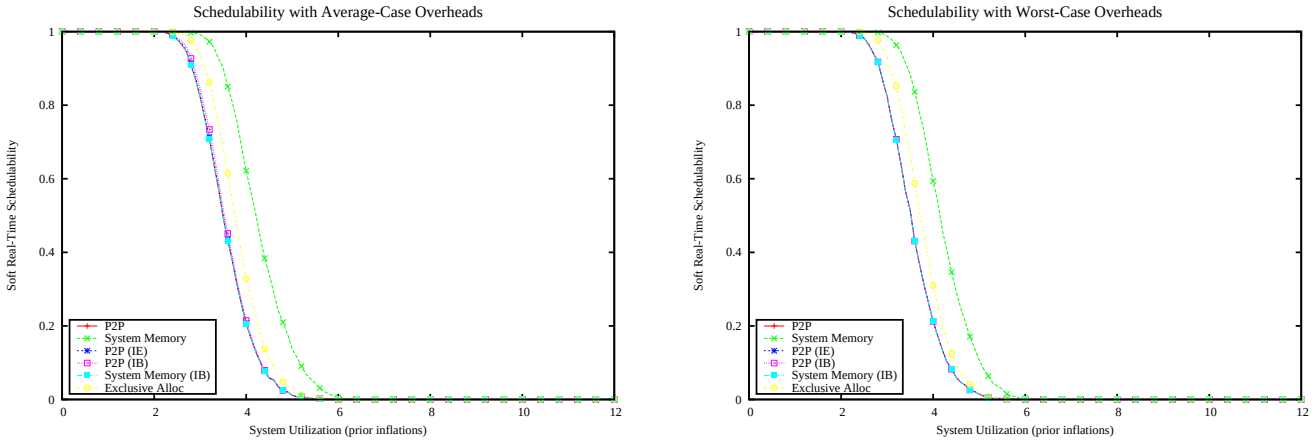

Figure 114: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

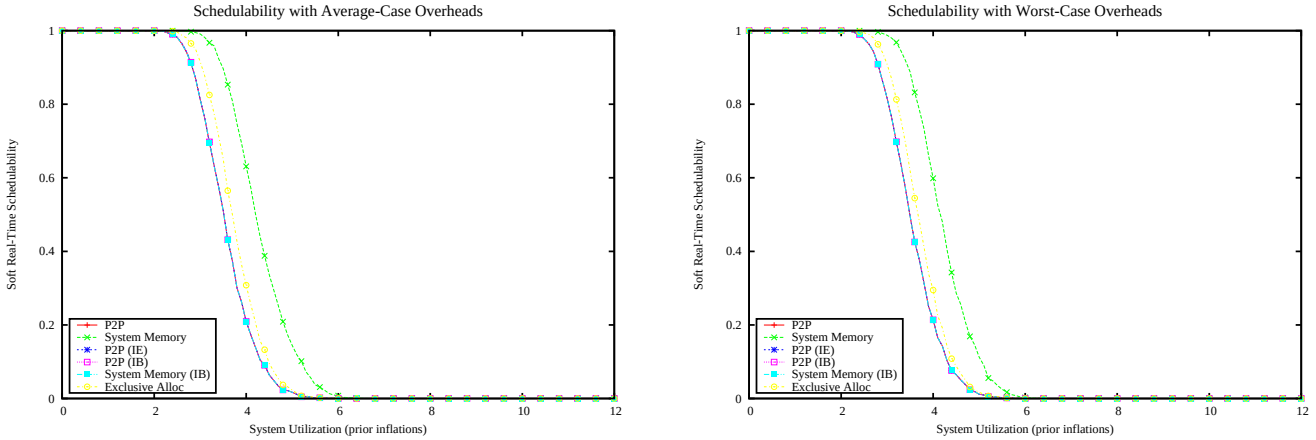

Figure 115: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

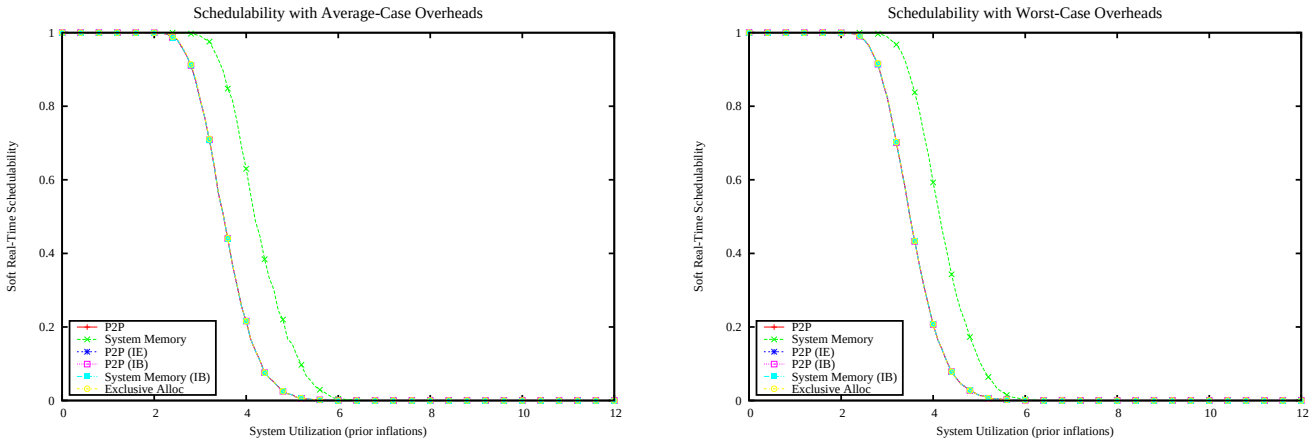

Figure 116: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

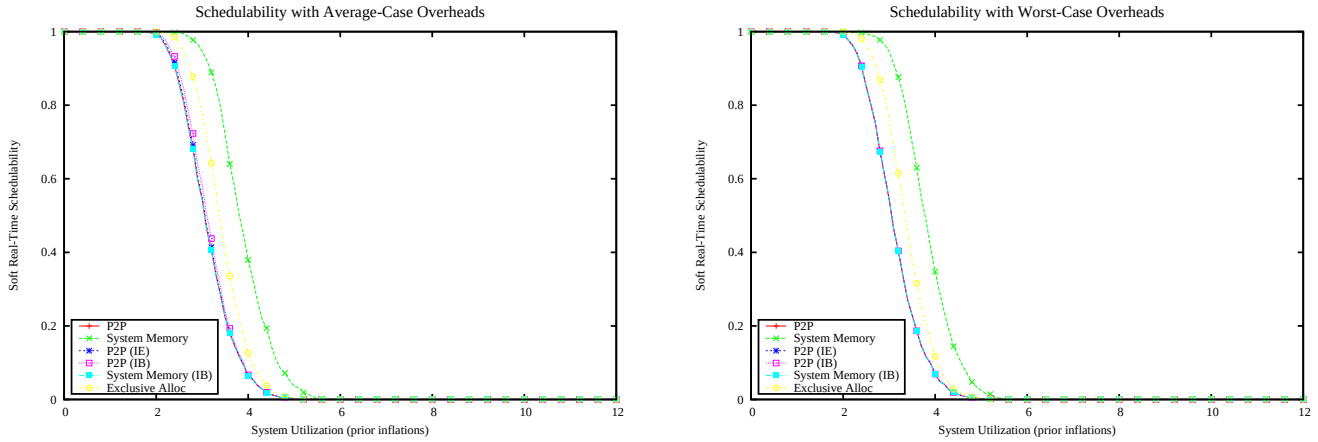

Figure 117: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

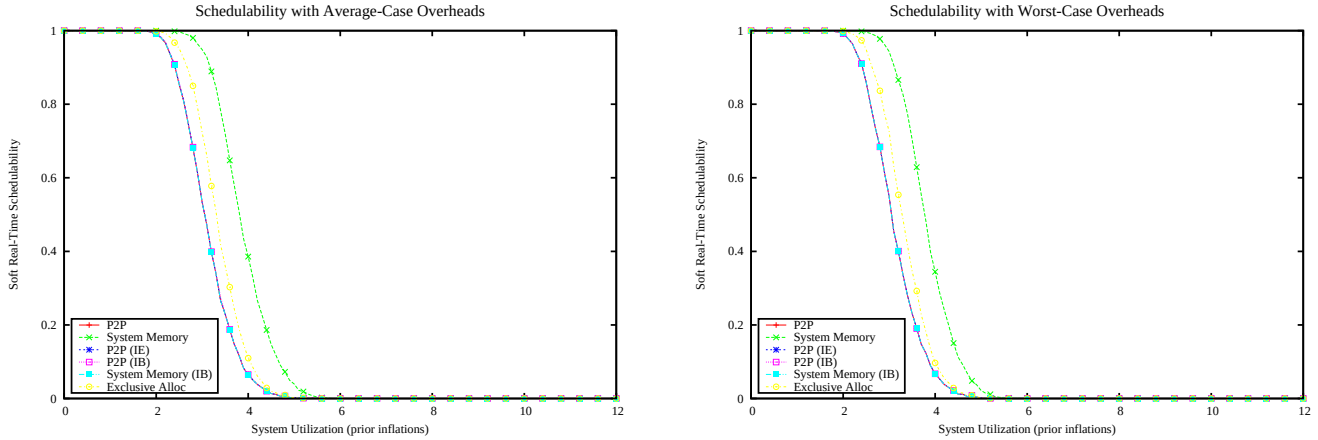

Figure 118: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

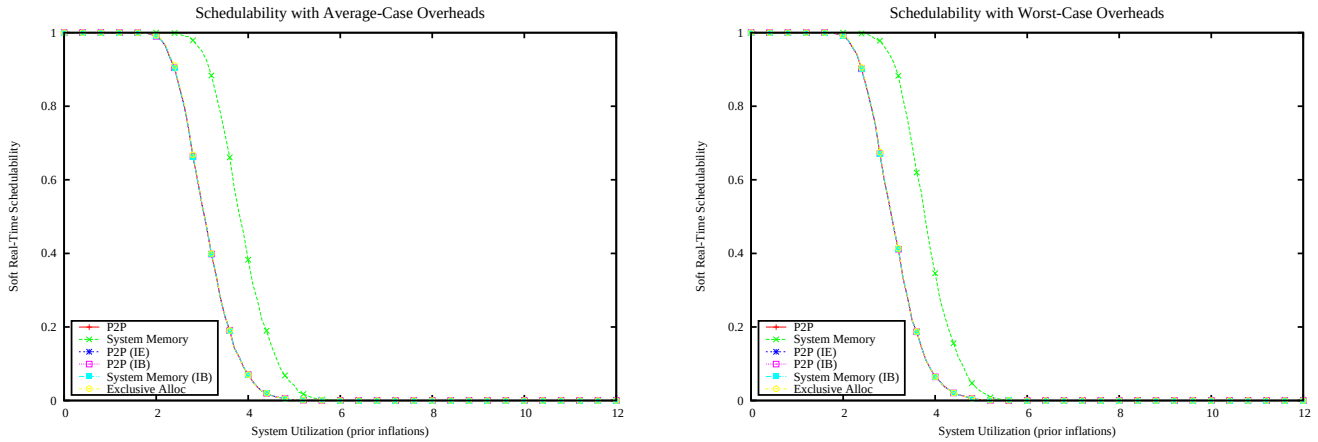

Figure 119: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

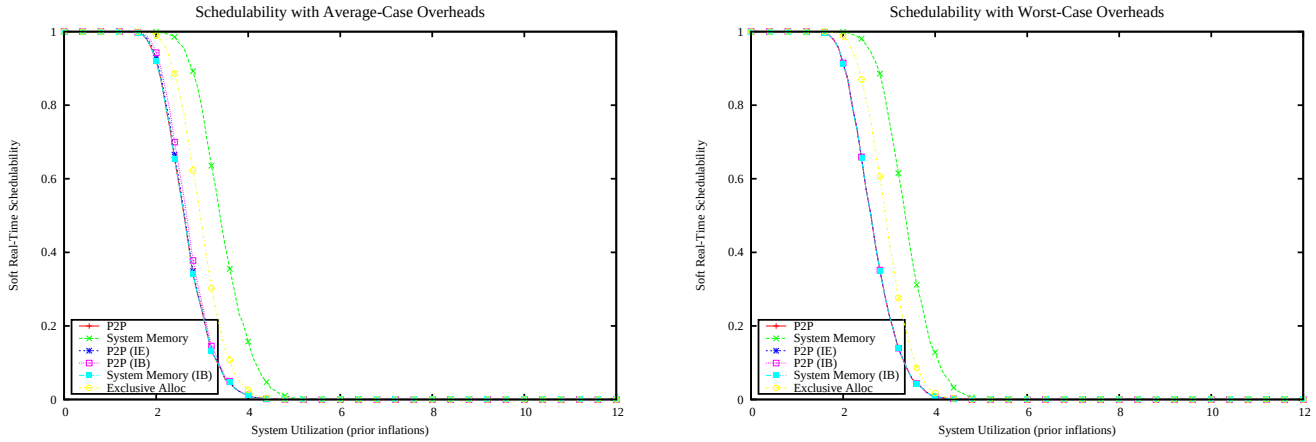

Figure 120: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

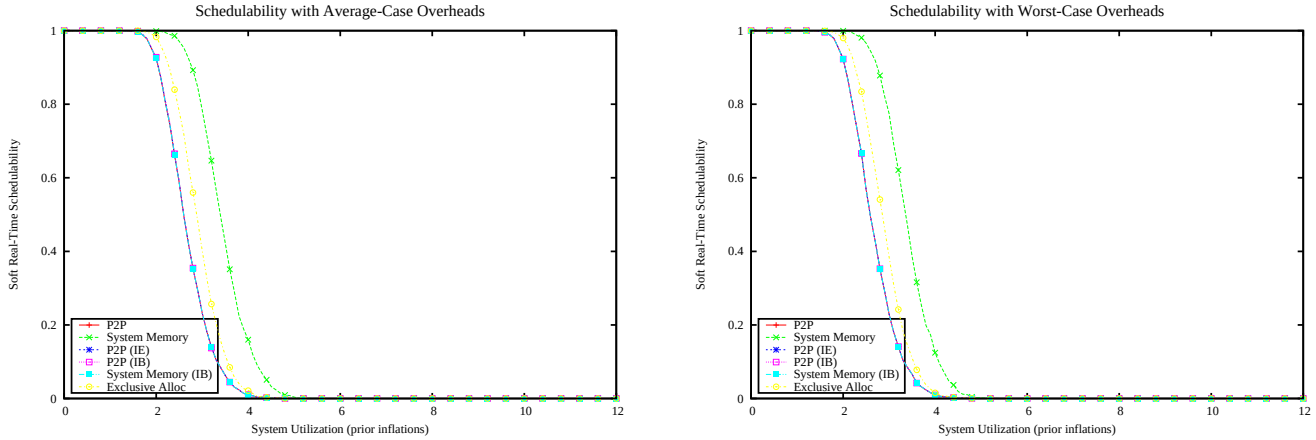

Figure 121: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

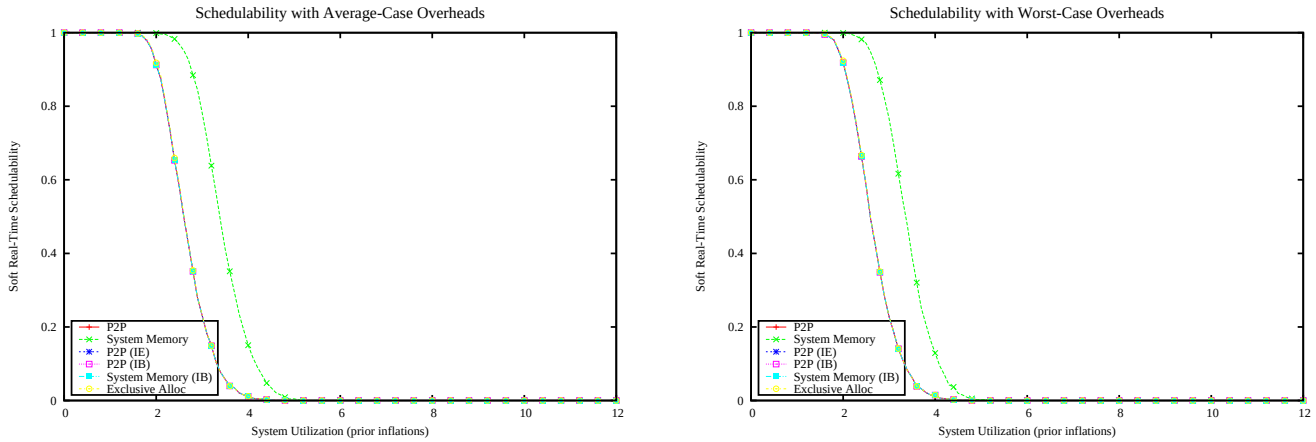

Figure 122: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

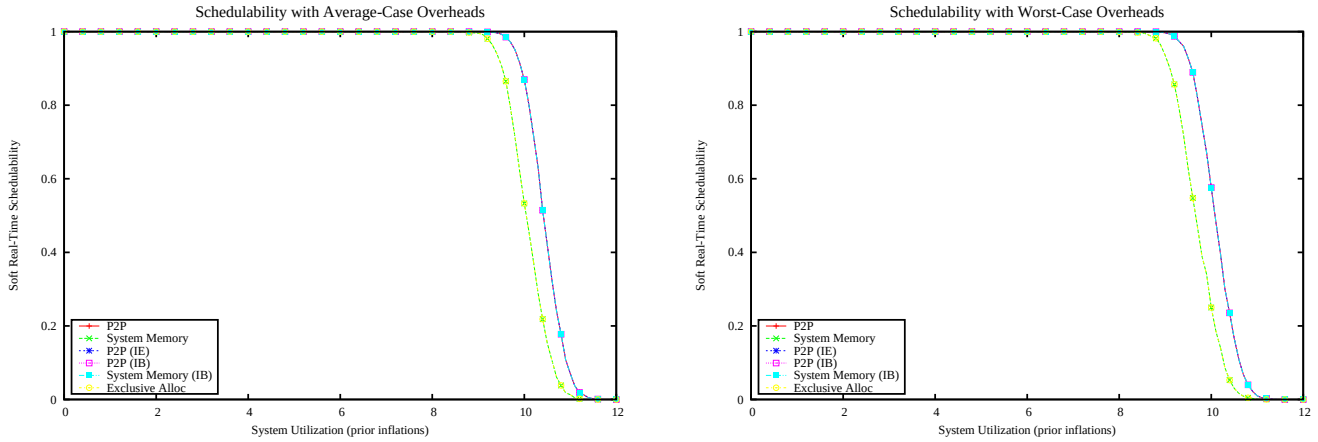

Figure 123: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

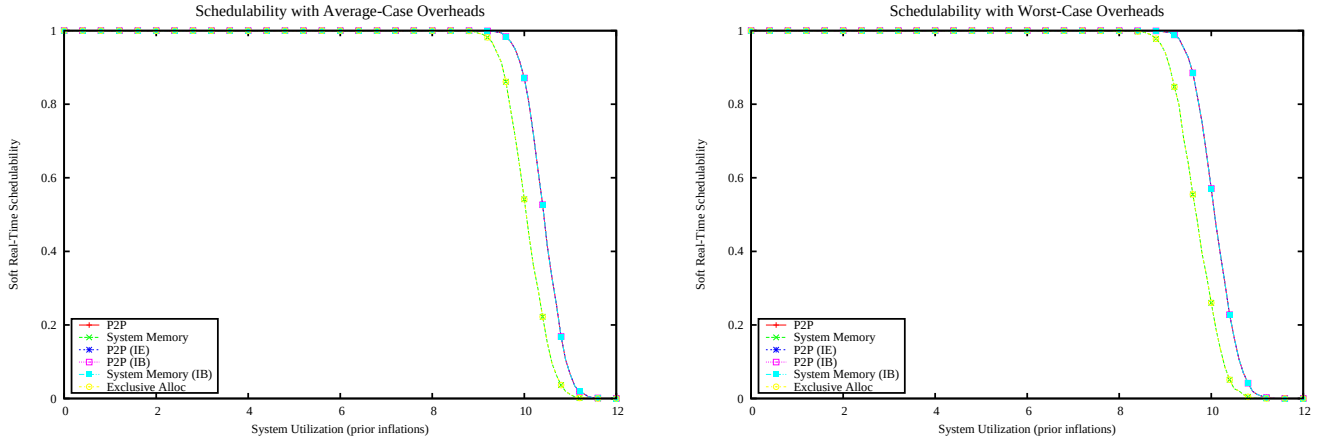

Figure 124: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

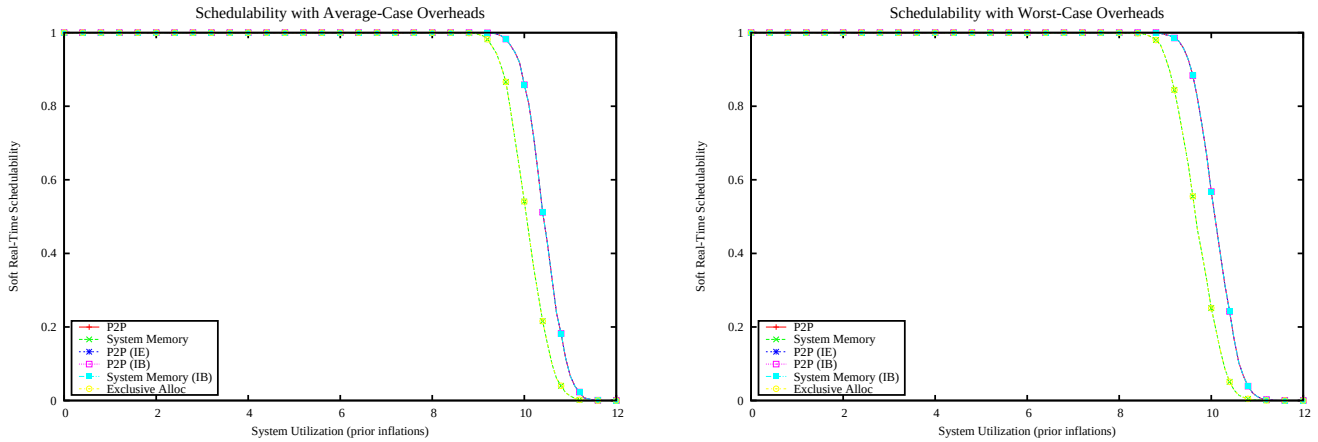

Figure 125: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

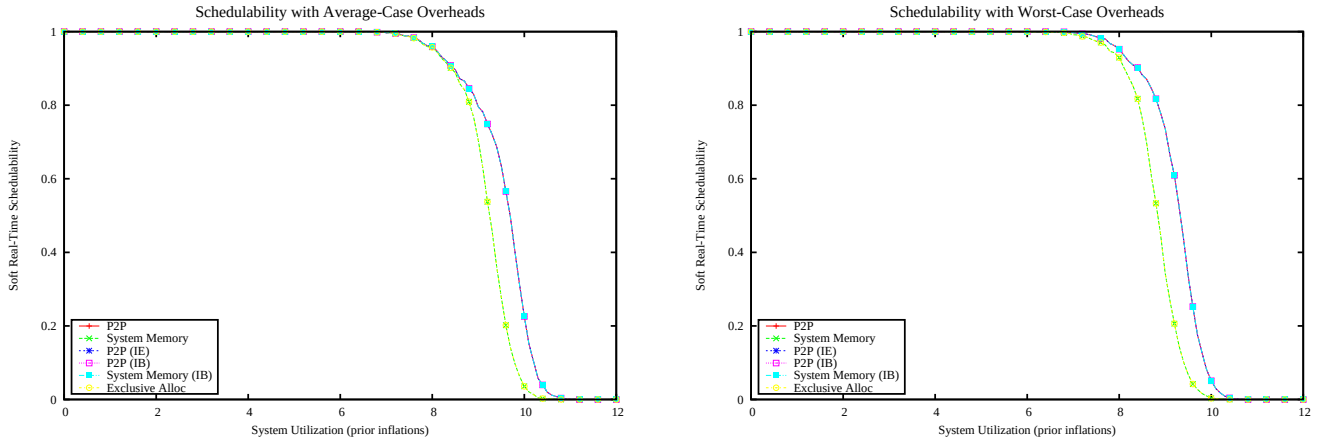

Figure 126: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

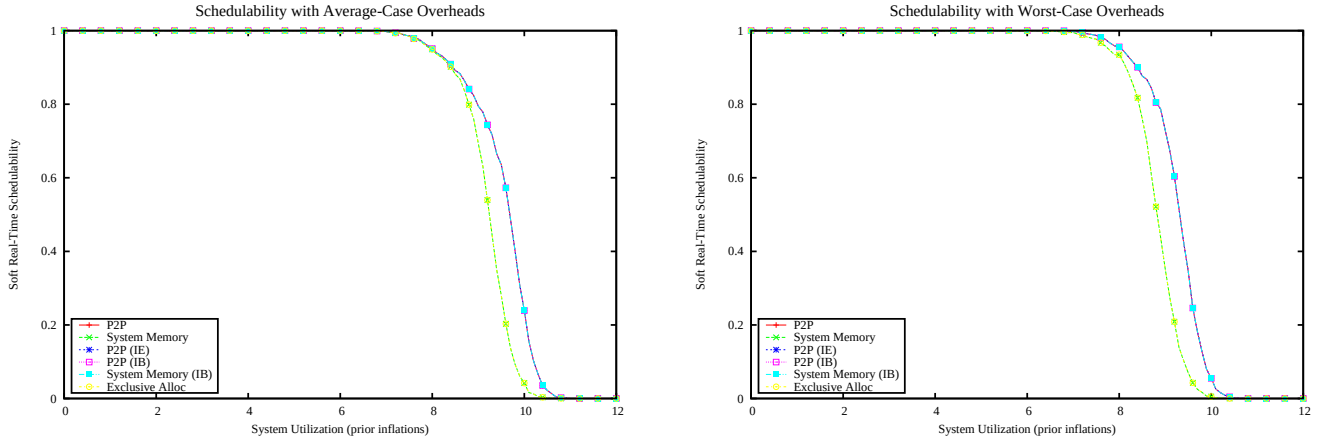

Figure 127: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

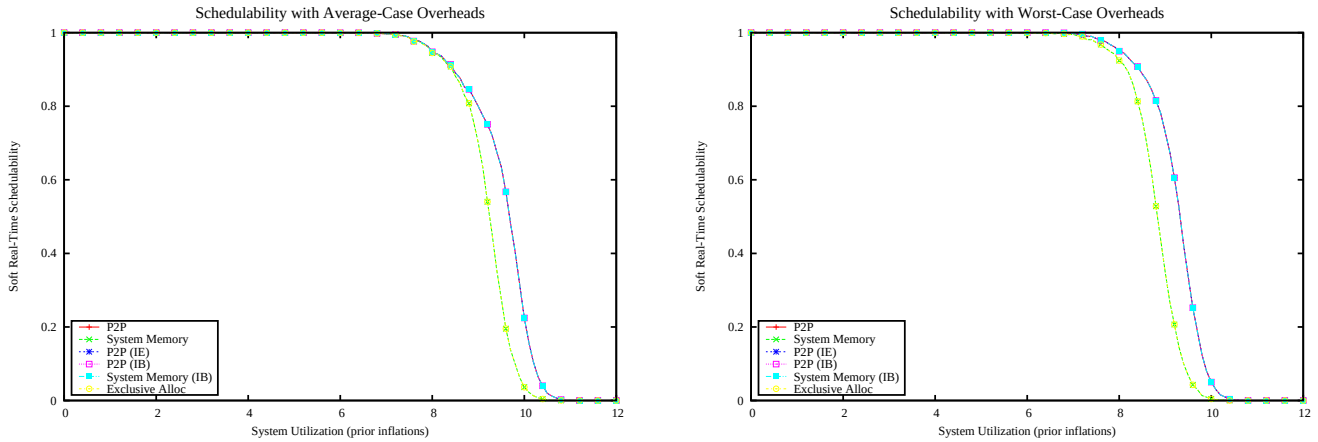

Figure 128: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

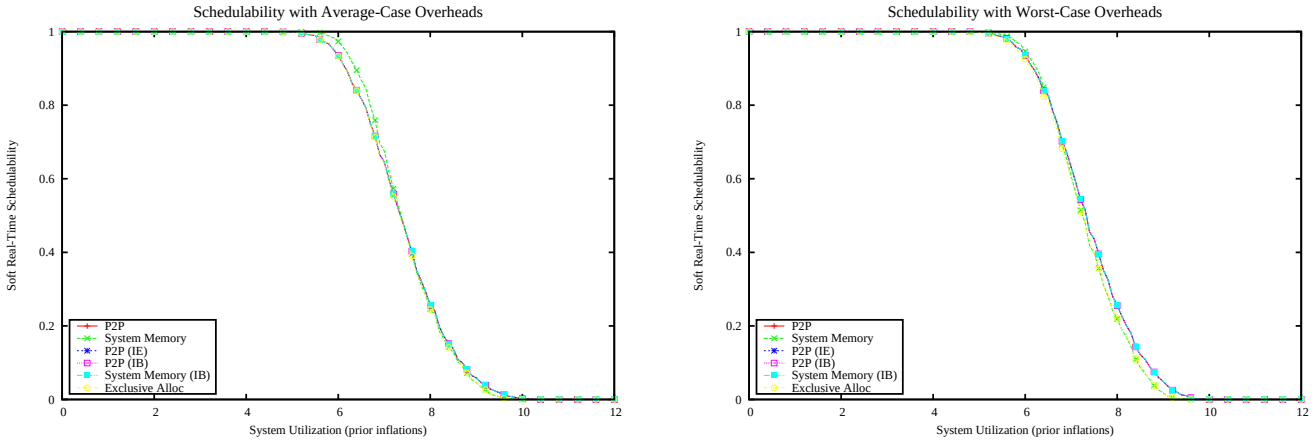

Figure 129: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

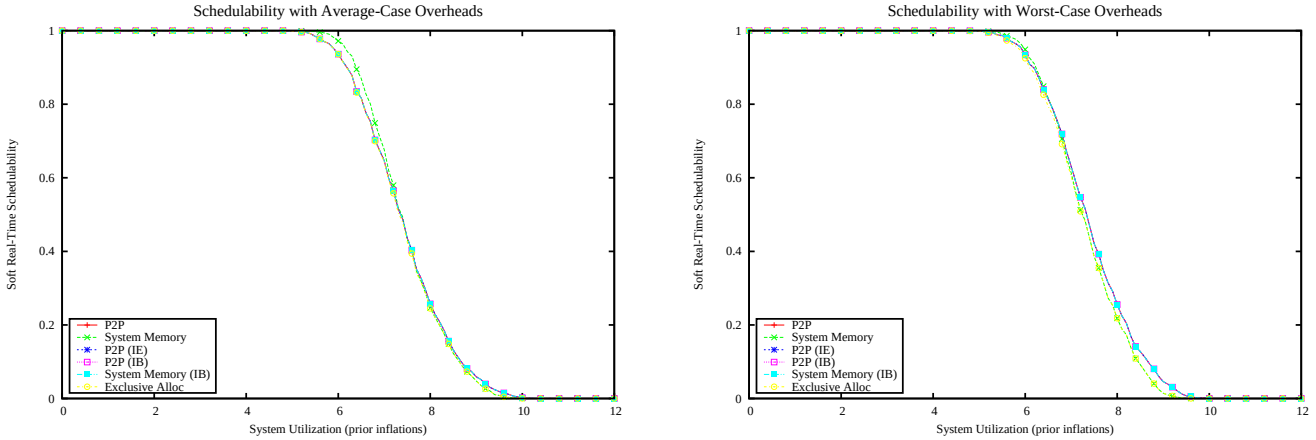

Figure 130: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

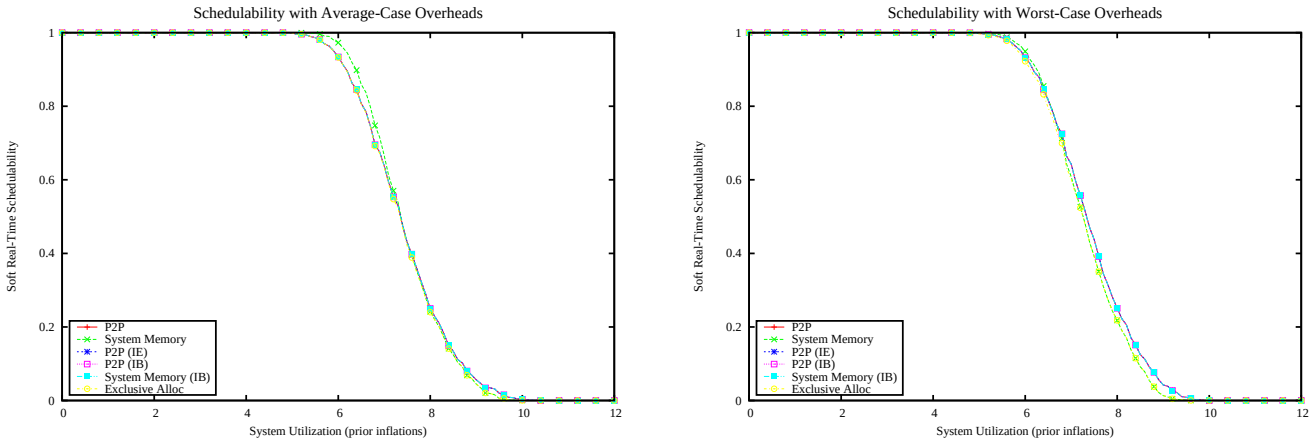

Figure 131: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

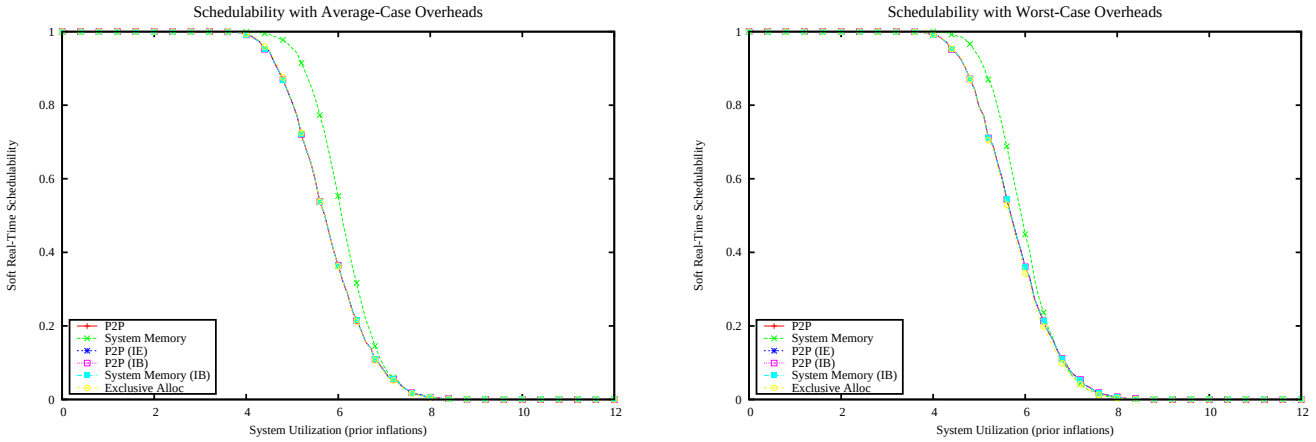

Figure 132: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

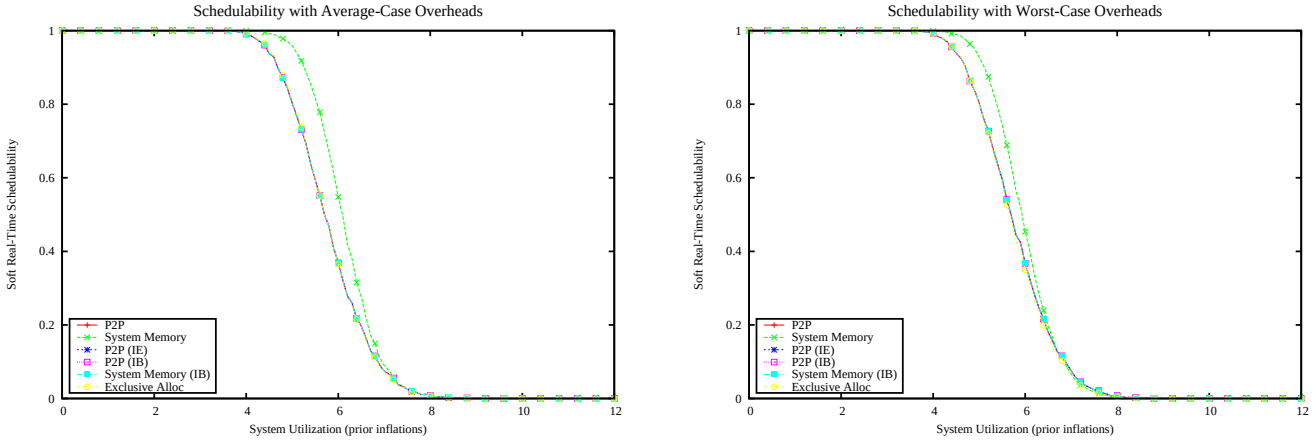

Figure 133: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

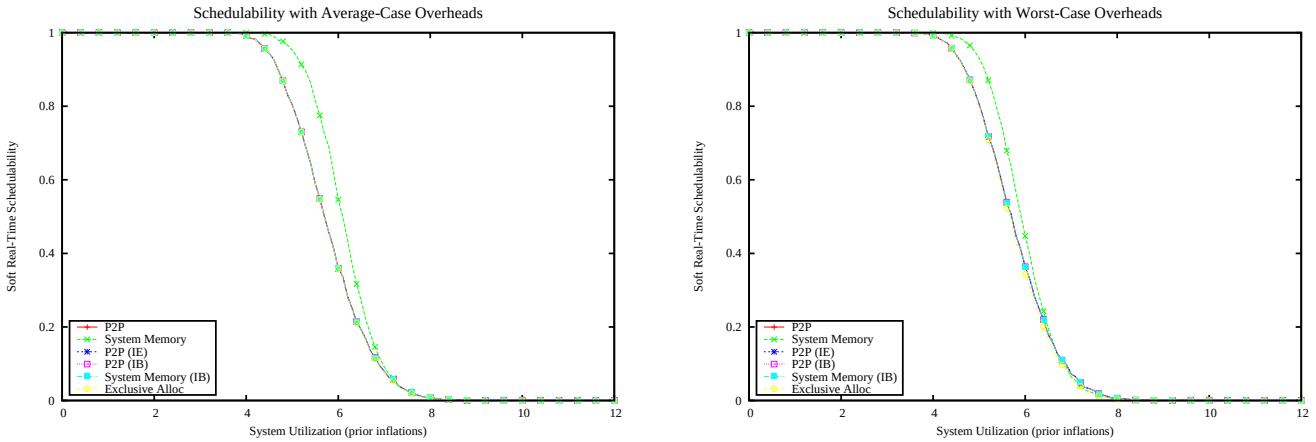

Figure 134: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

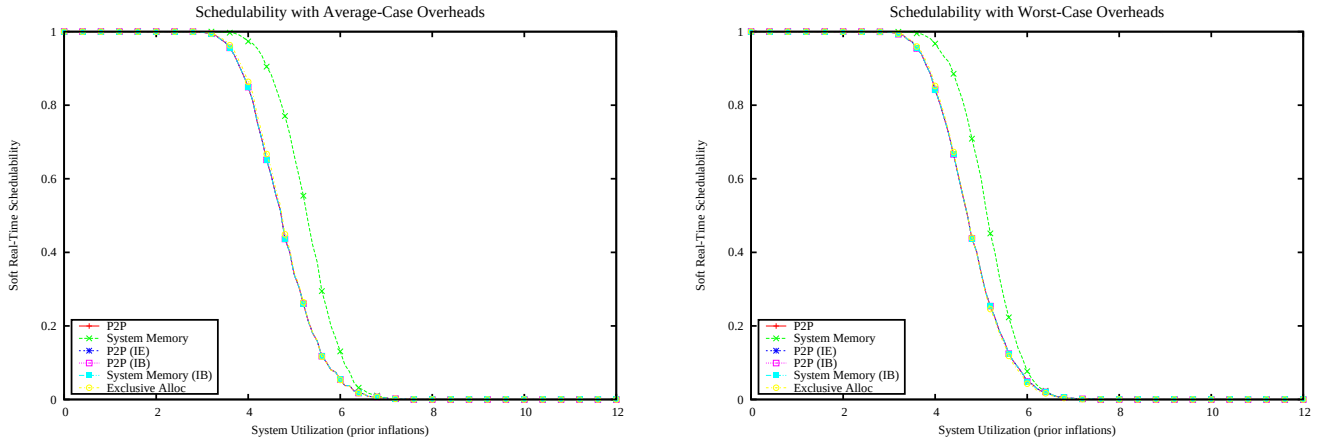

Figure 135: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

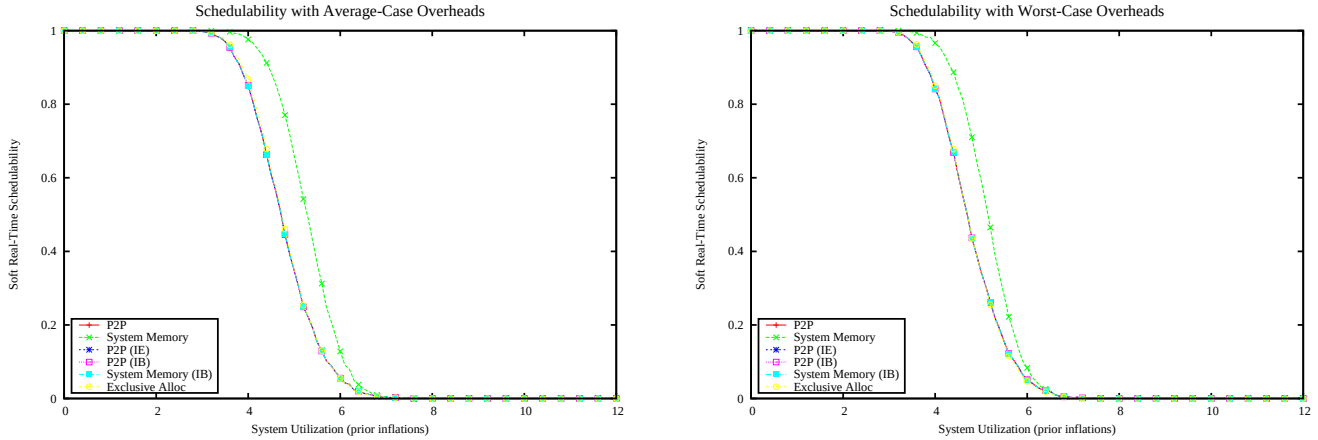

Figure 136: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

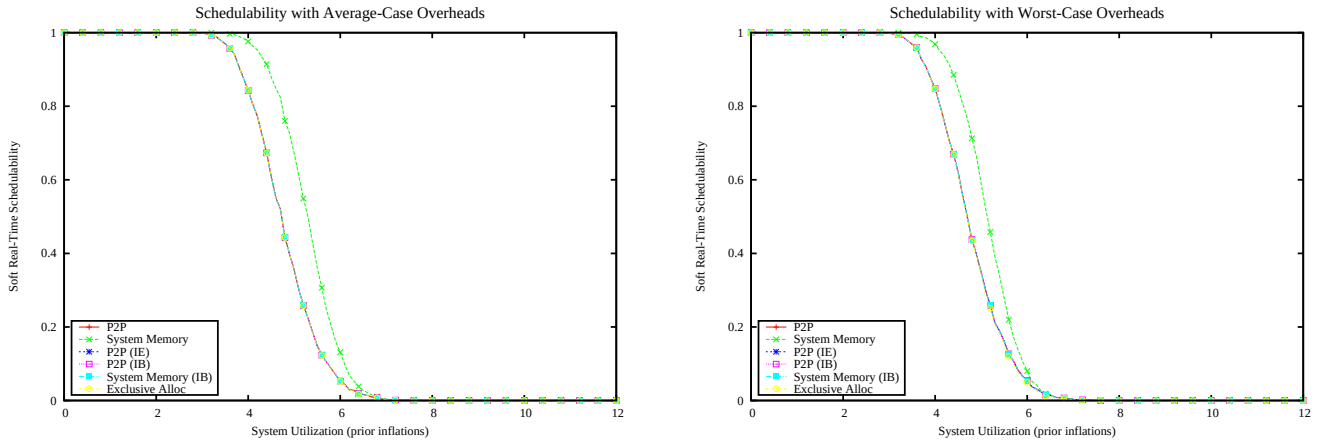

Figure 137: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

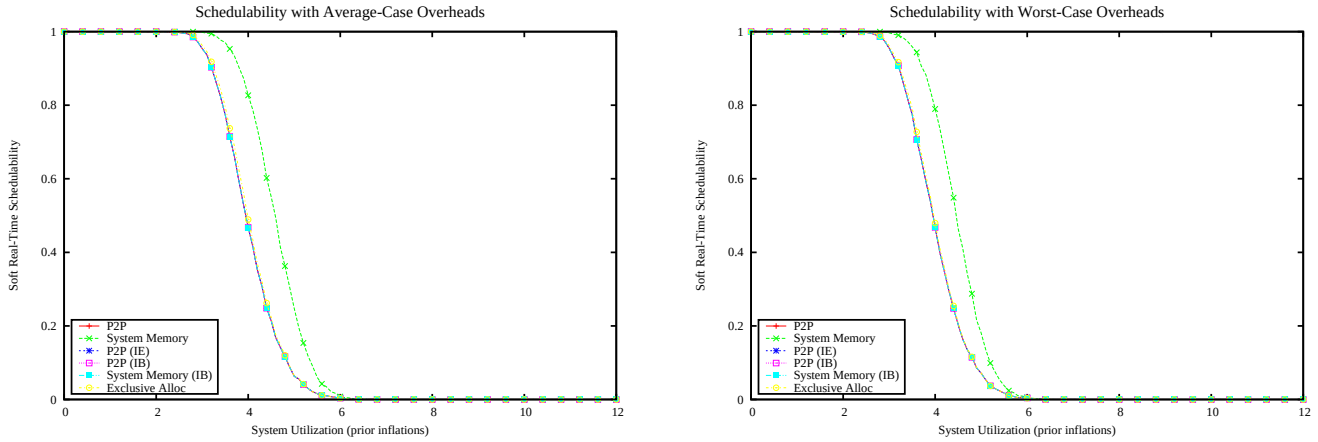

Figure 138: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

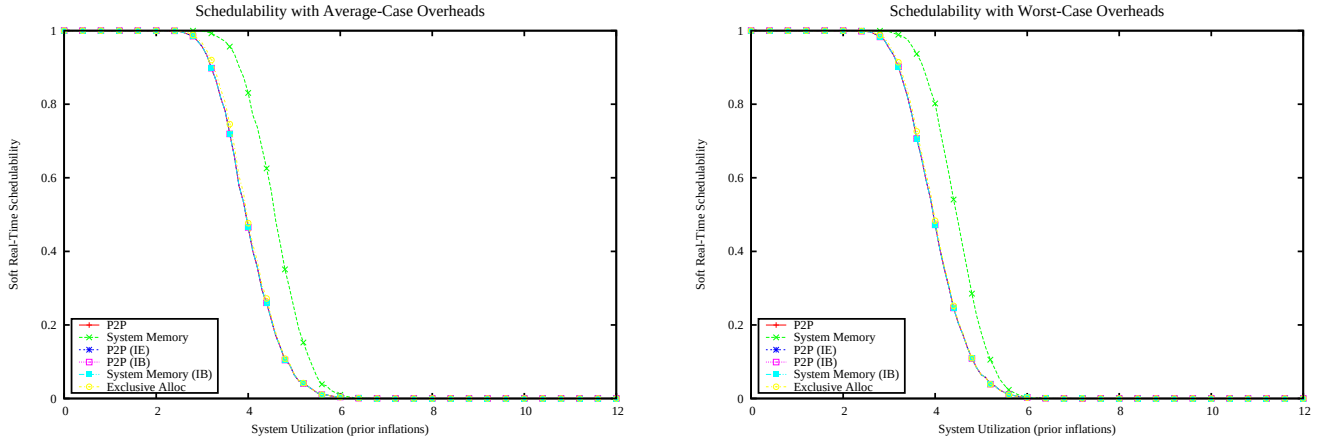

Figure 139: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

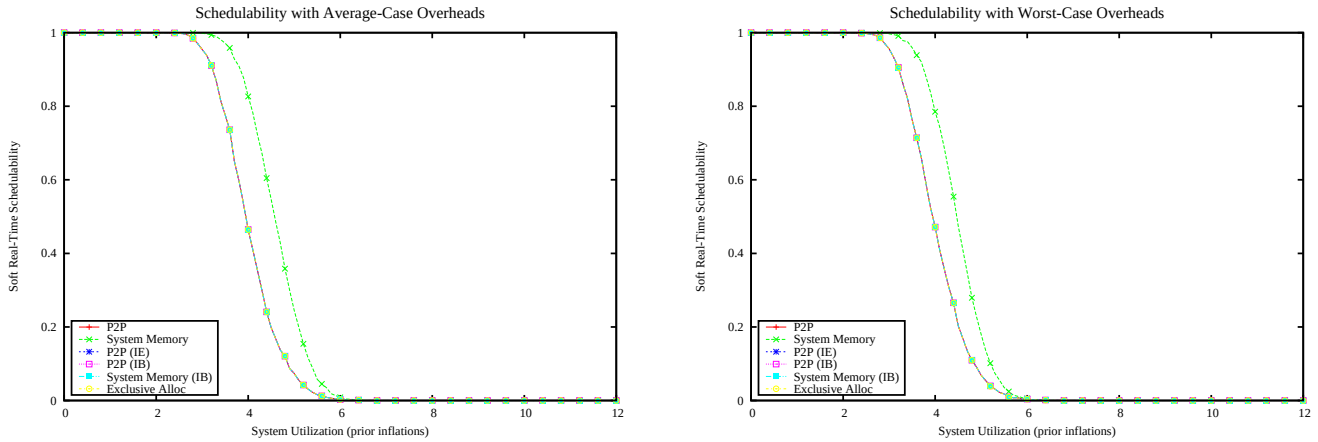

Figure 140: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

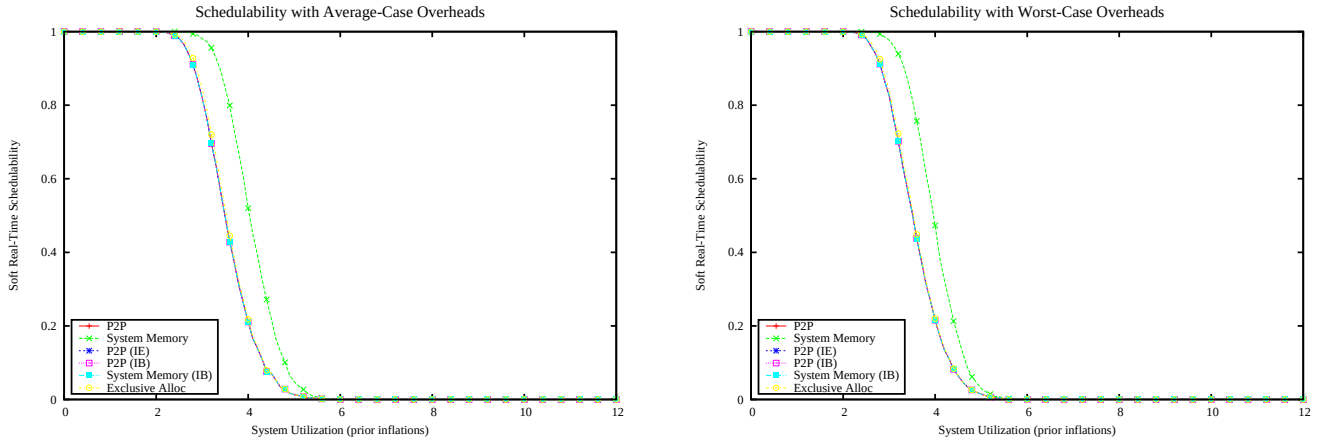

Figure 141: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

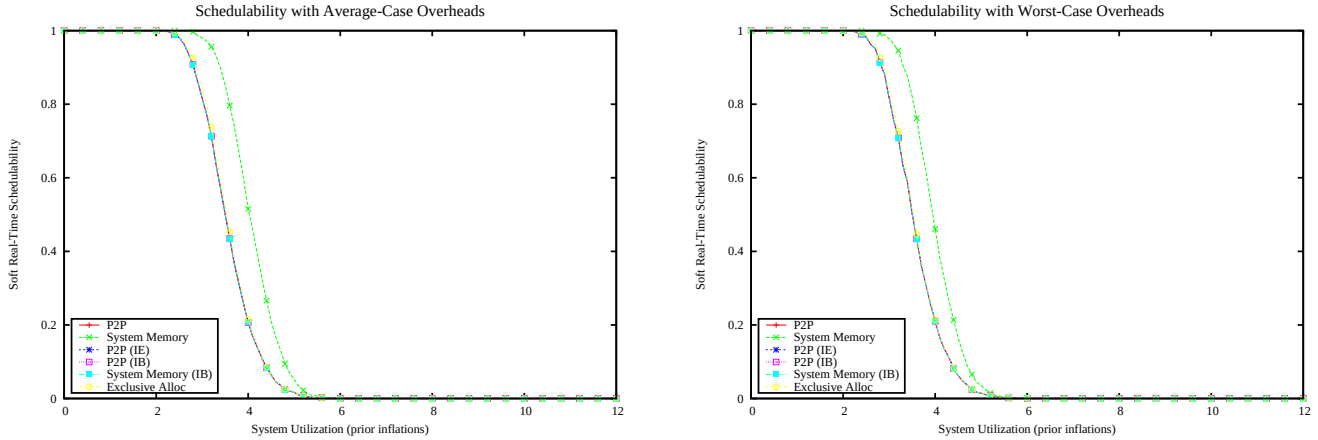

Figure 142: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

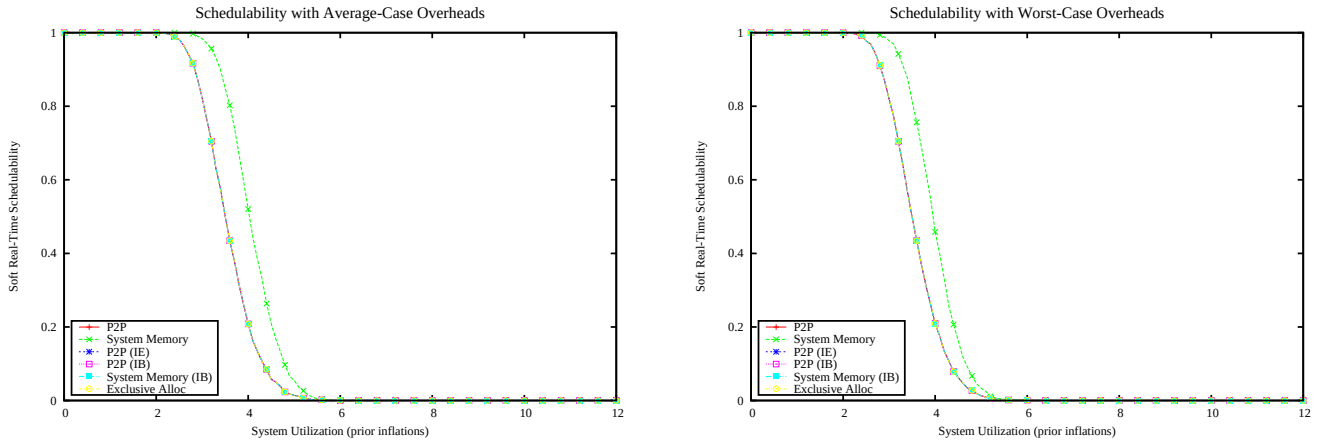

Figure 143: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

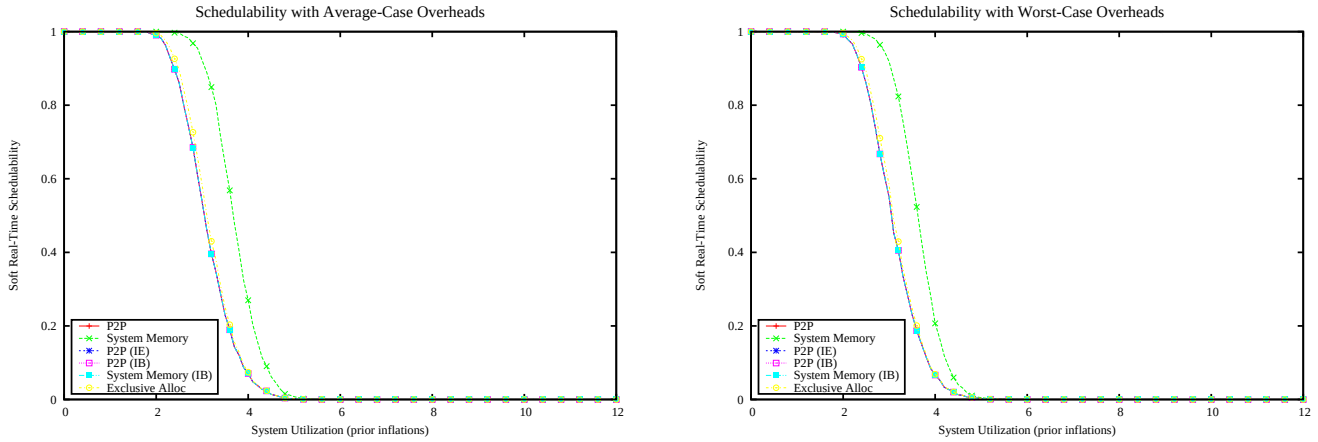

Figure 144: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

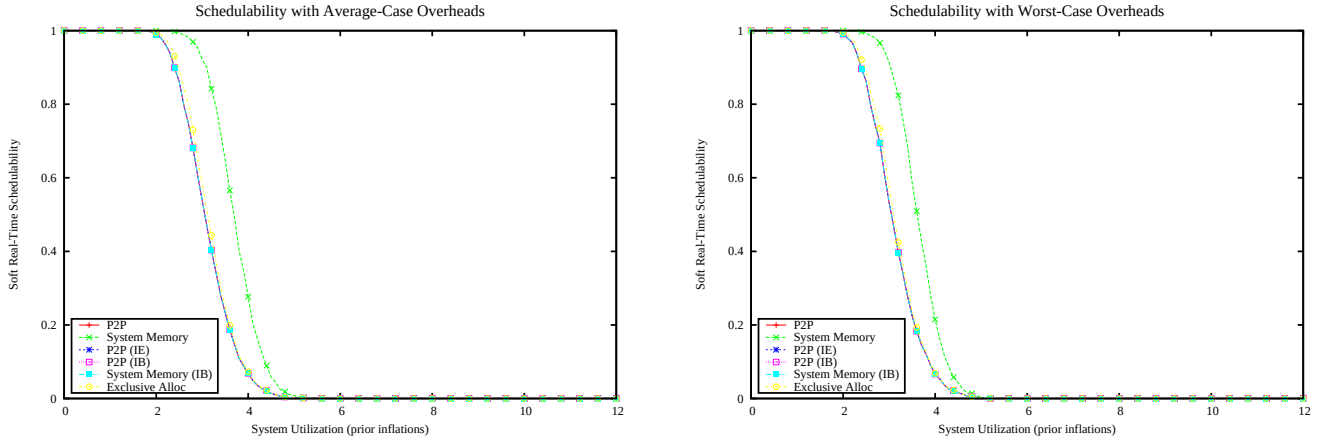

Figure 145: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

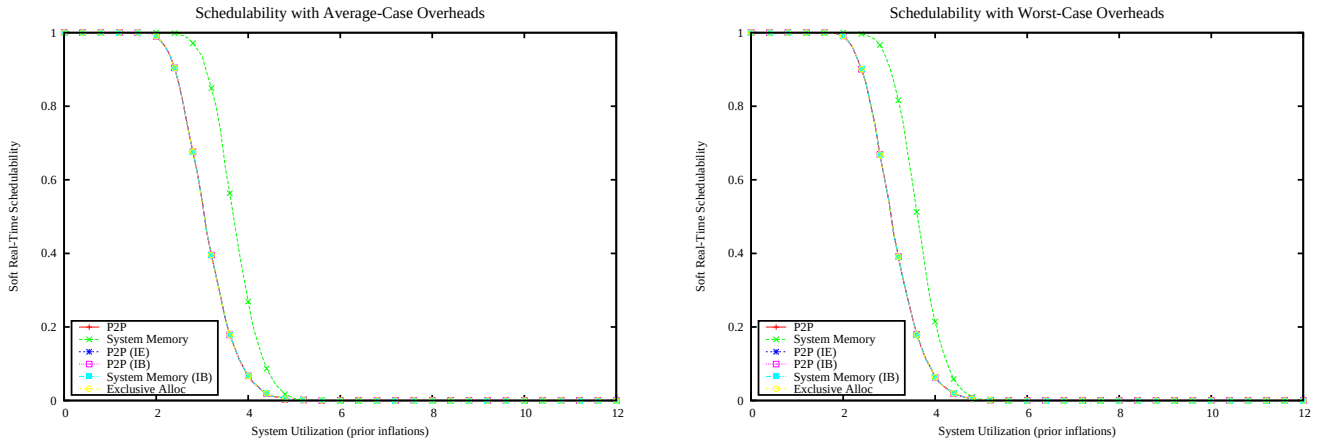

Figure 146: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

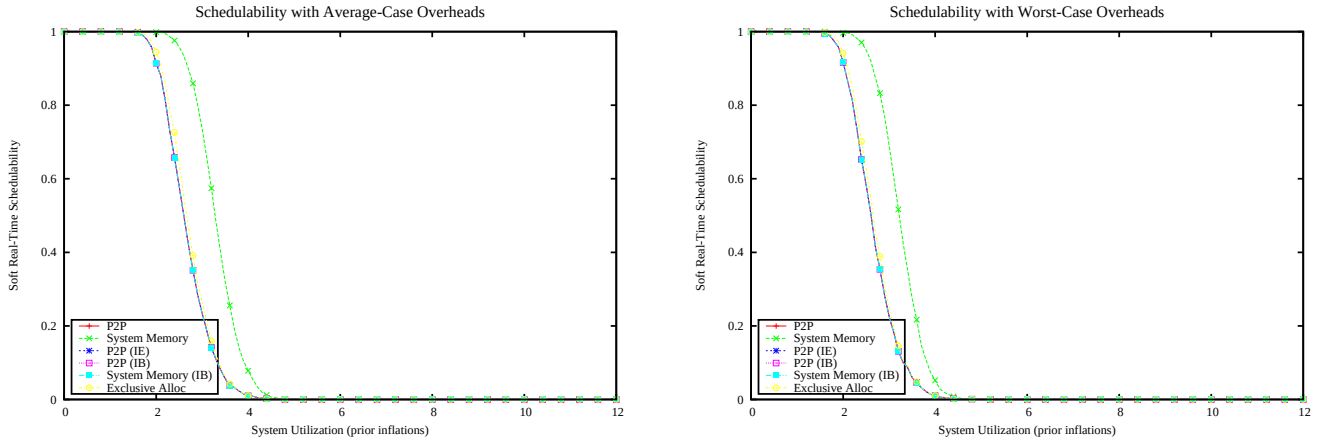

Figure 147: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

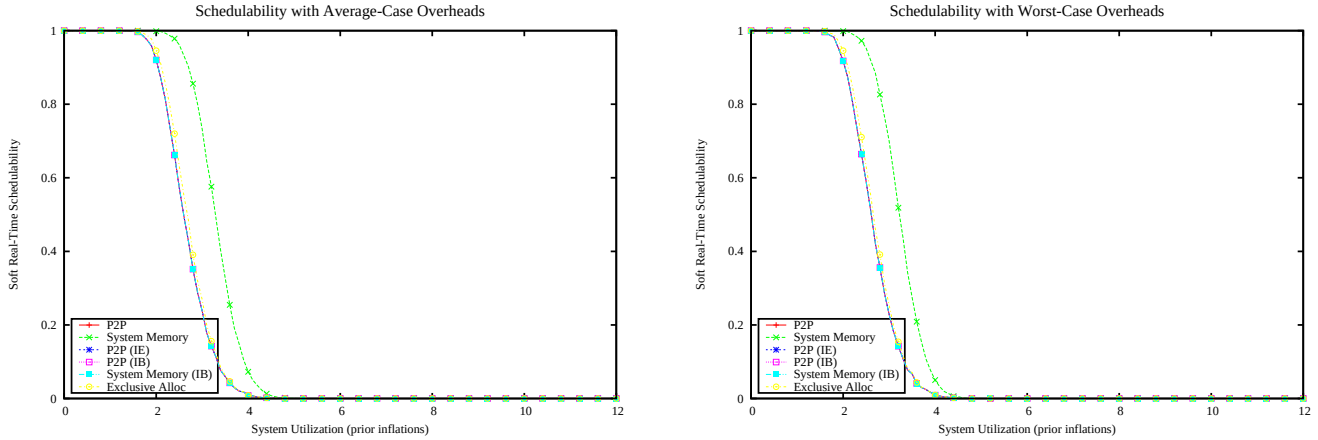

Figure 148: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

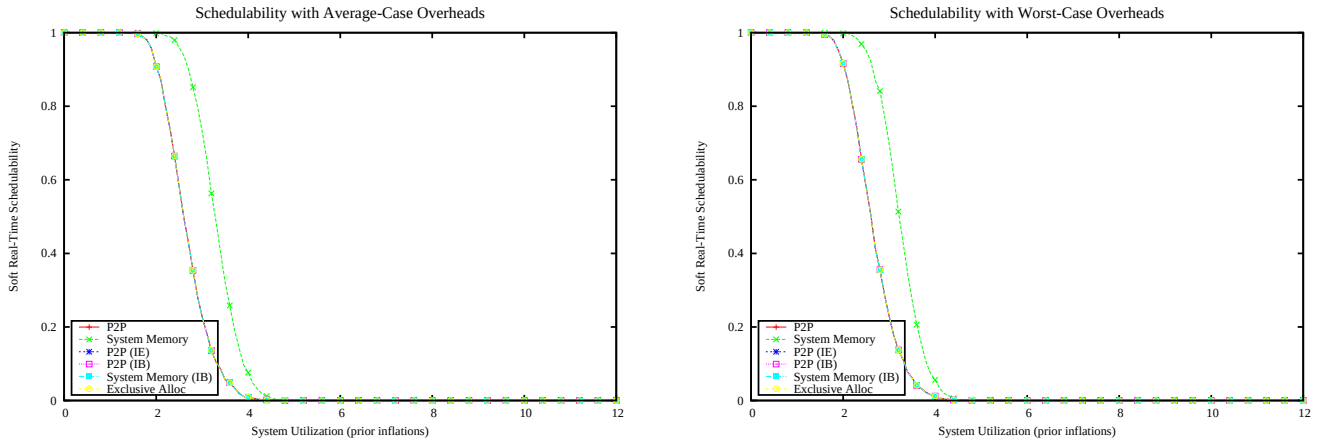

Figure 149: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

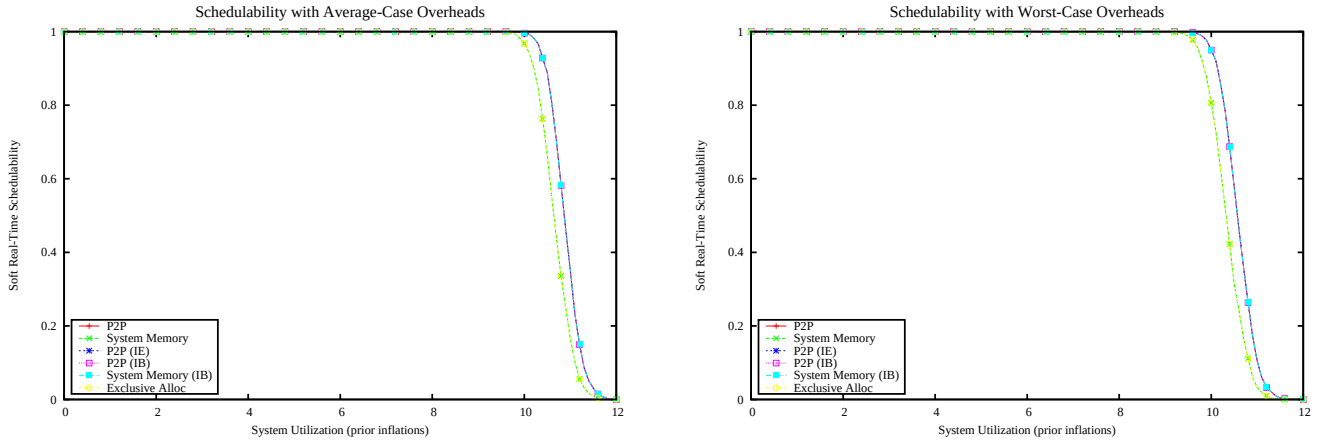

Figure 150: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

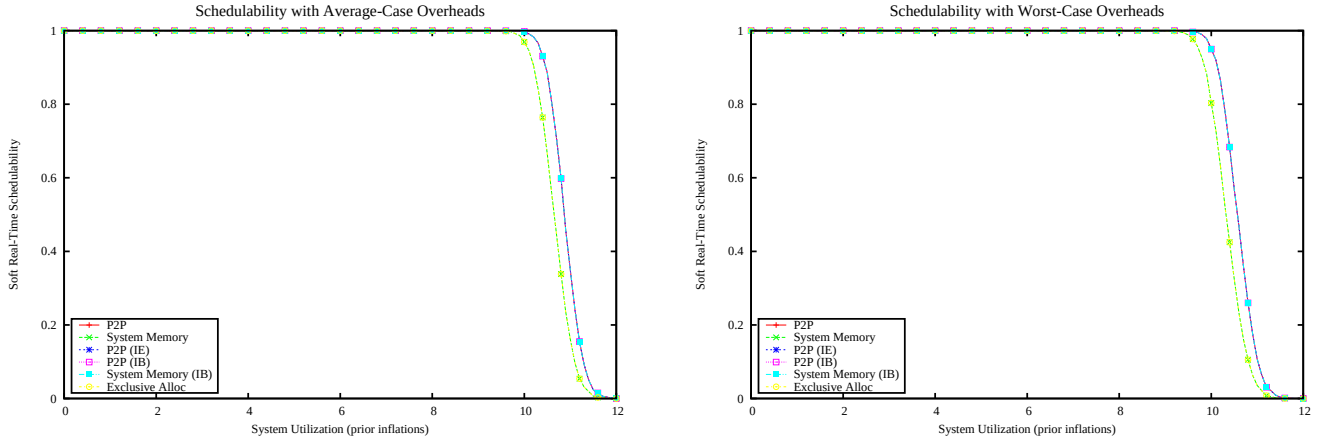

Figure 151: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

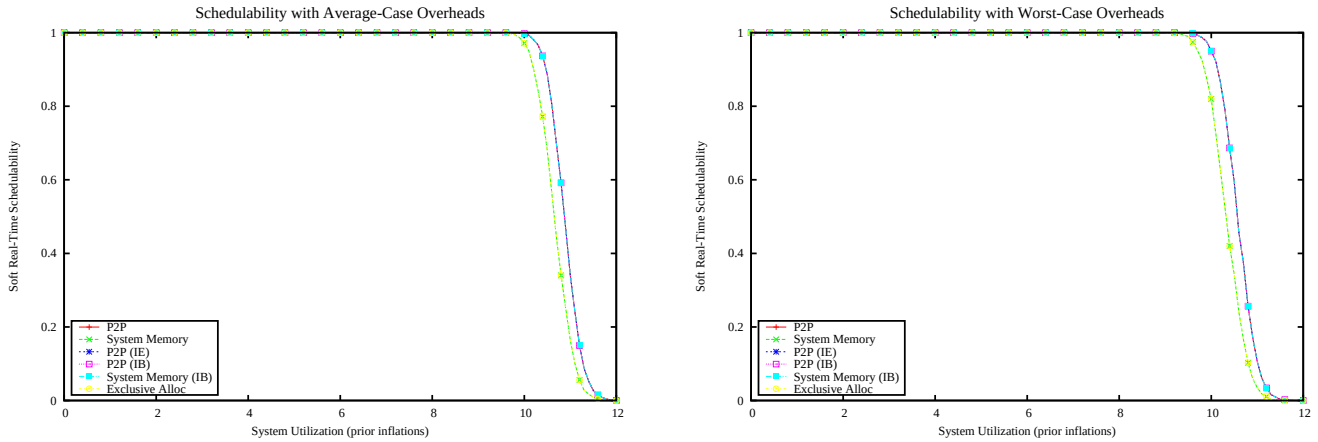

Figure 152: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

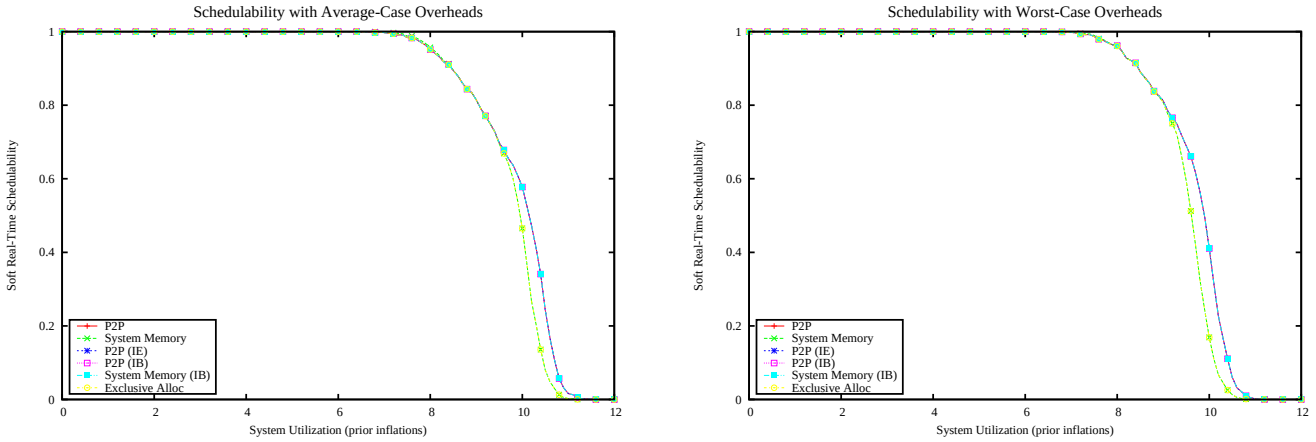

Figure 153: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

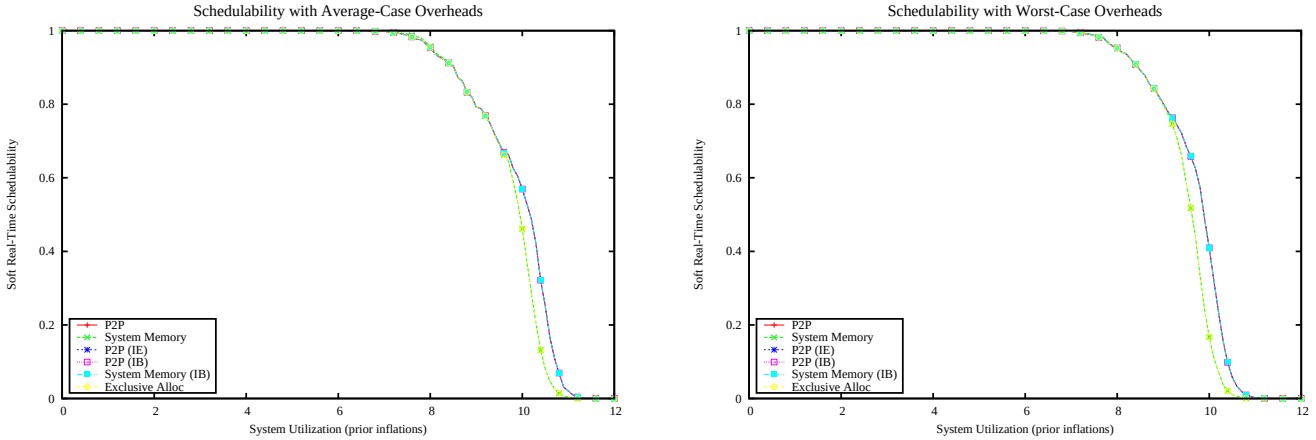

Figure 154: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

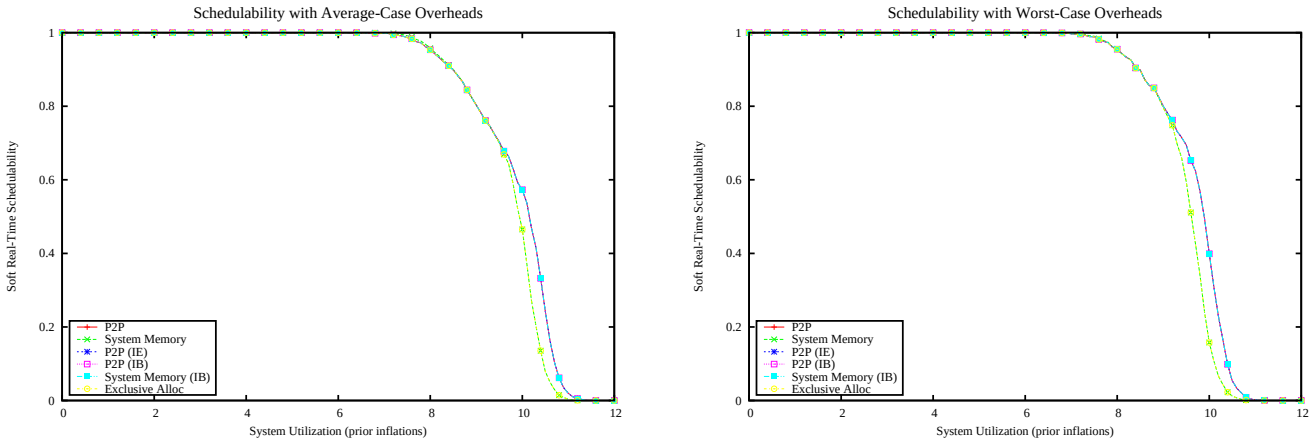

Figure 155: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

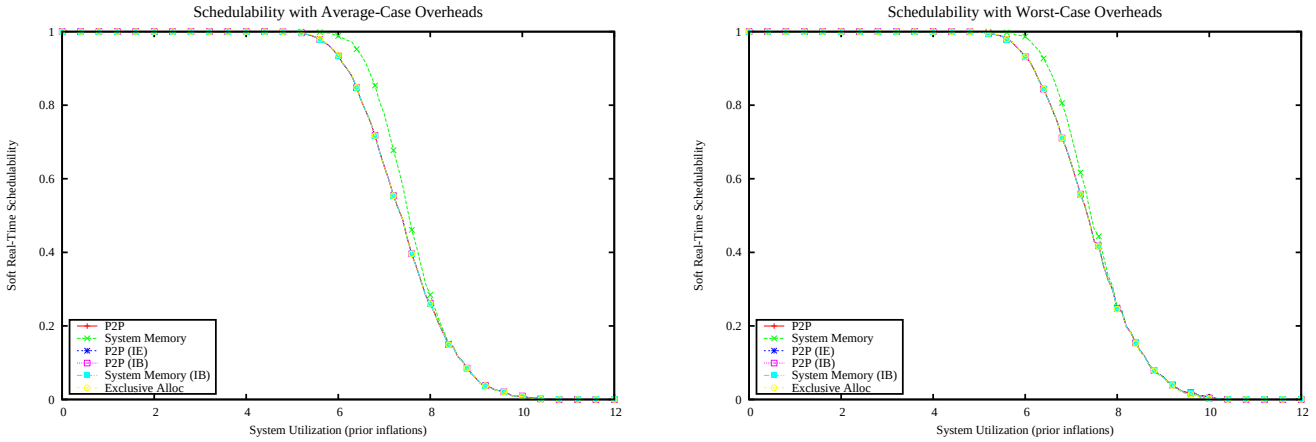

Figure 156: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

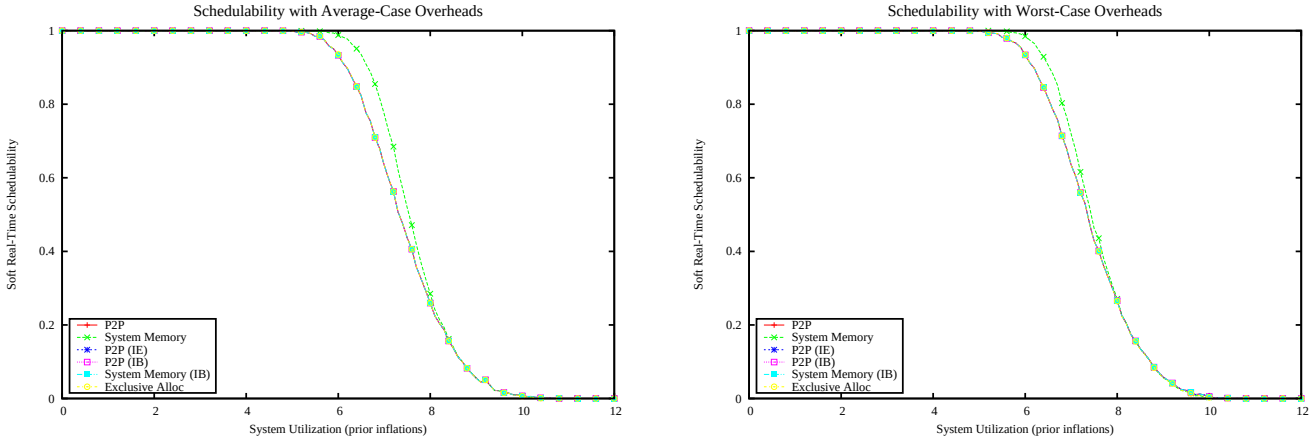

Figure 157: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

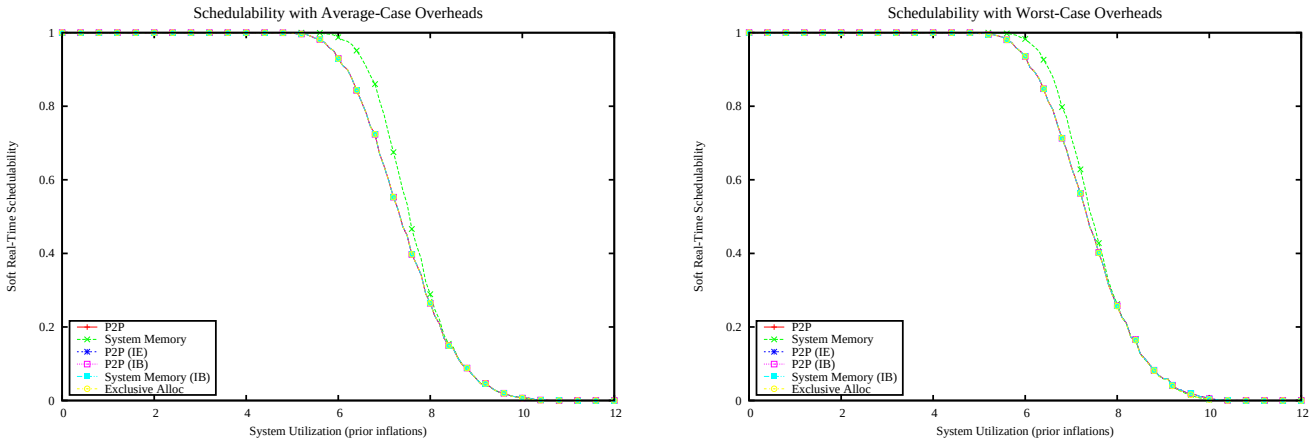

Figure 158: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

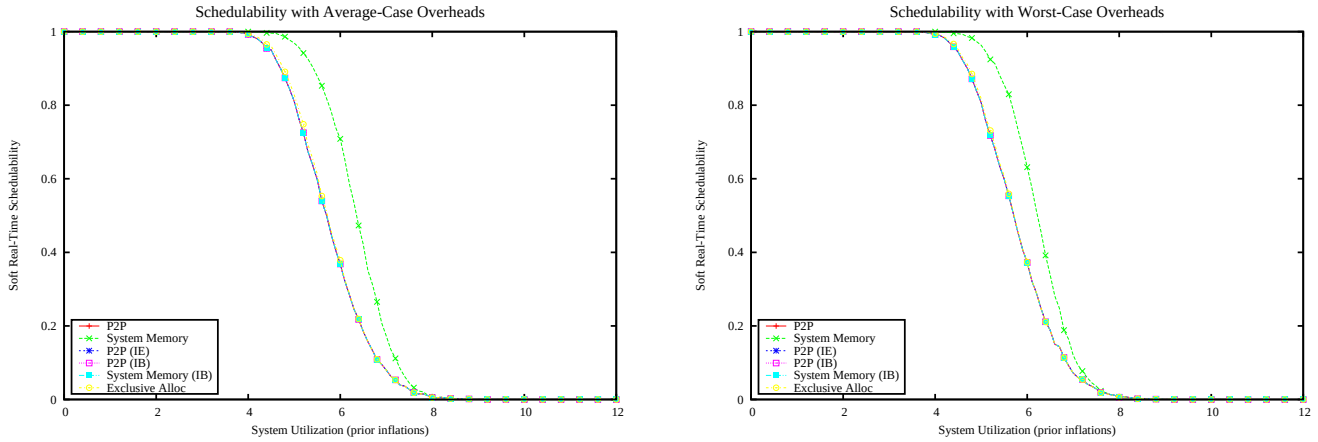

Figure 159: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

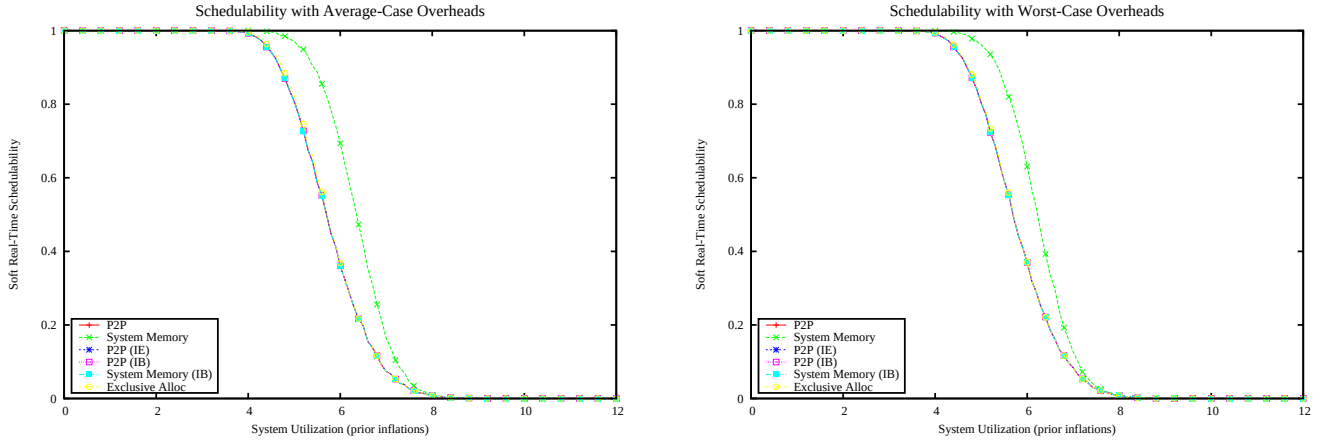

Figure 160: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

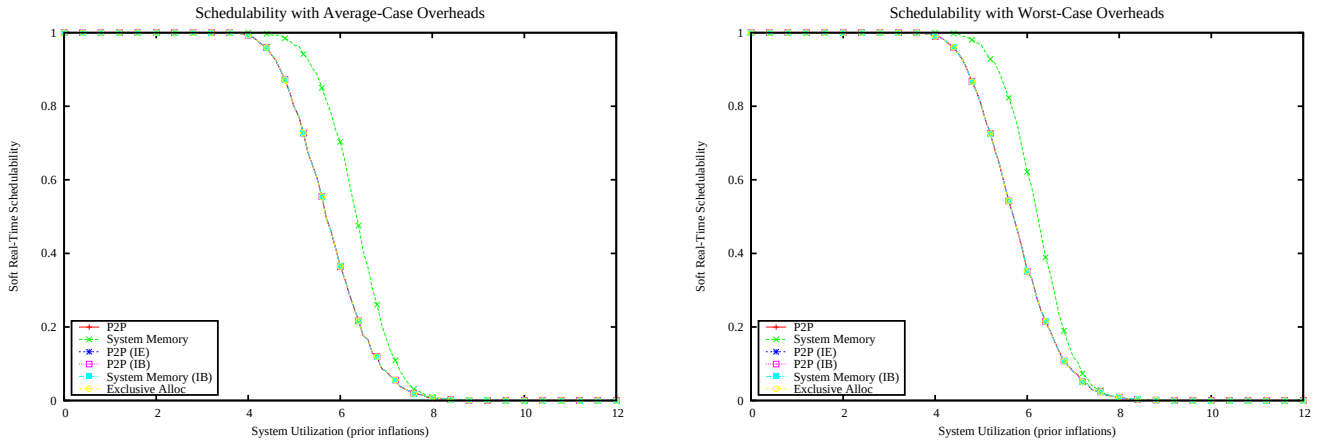

Figure 161: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

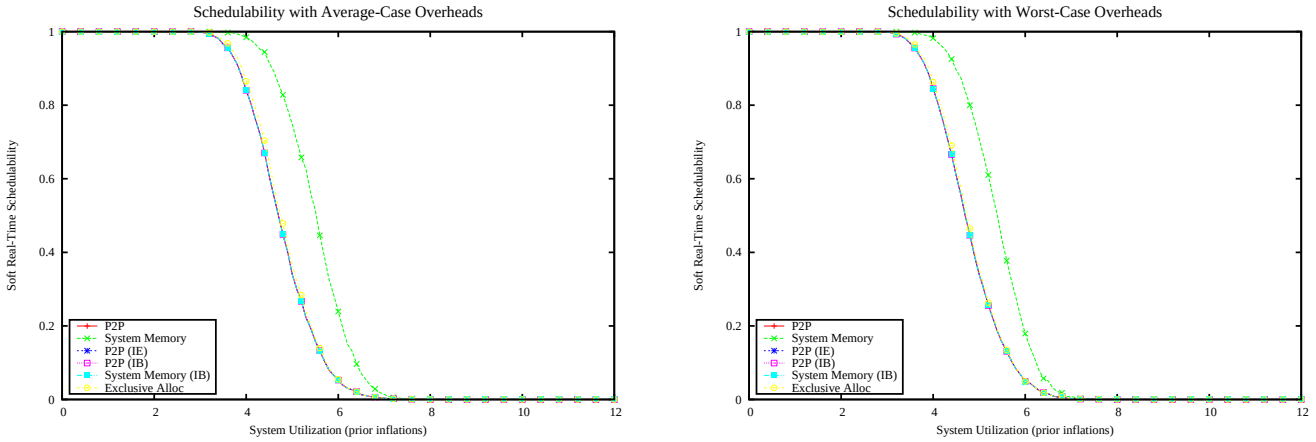

Figure 162: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

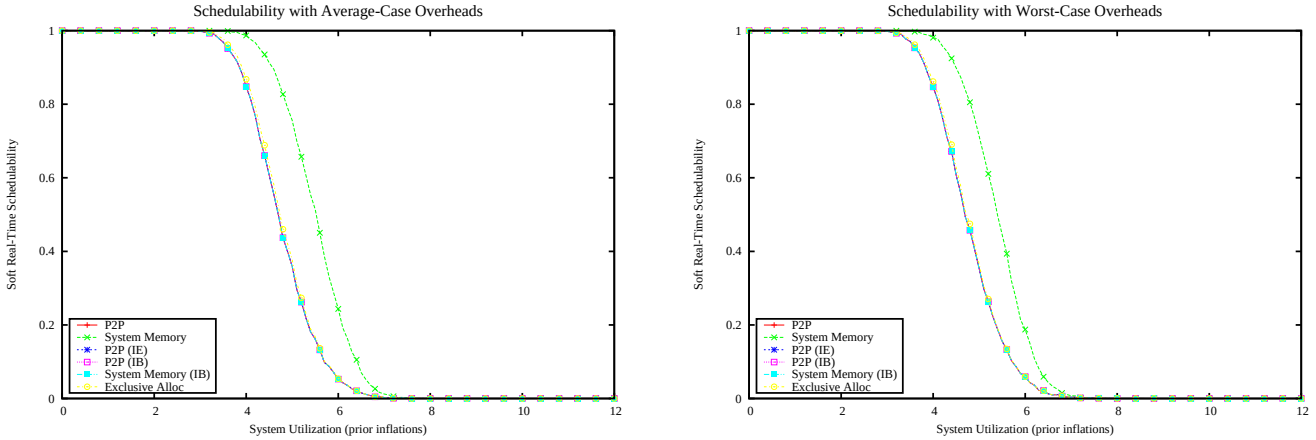

Figure 163: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

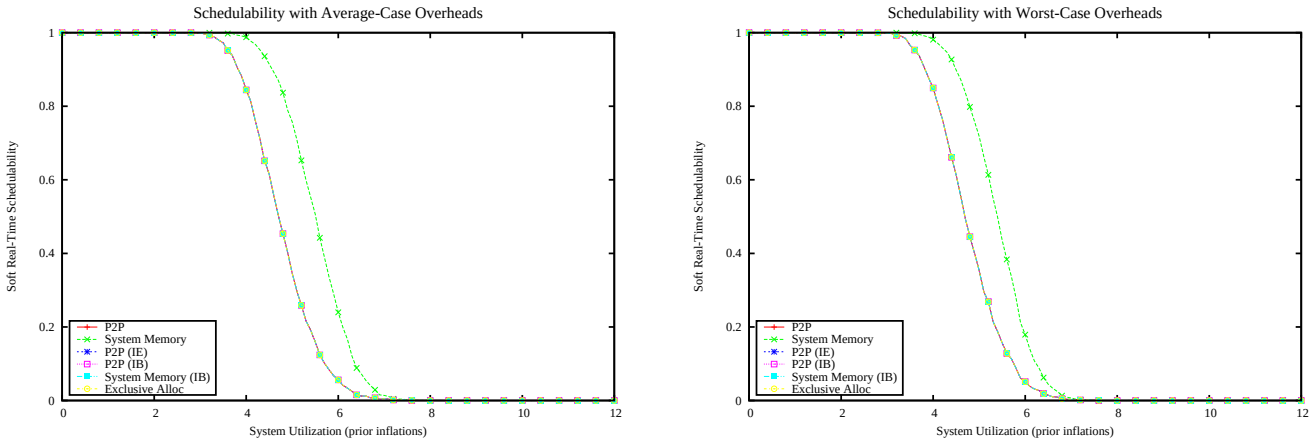

Figure 164: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

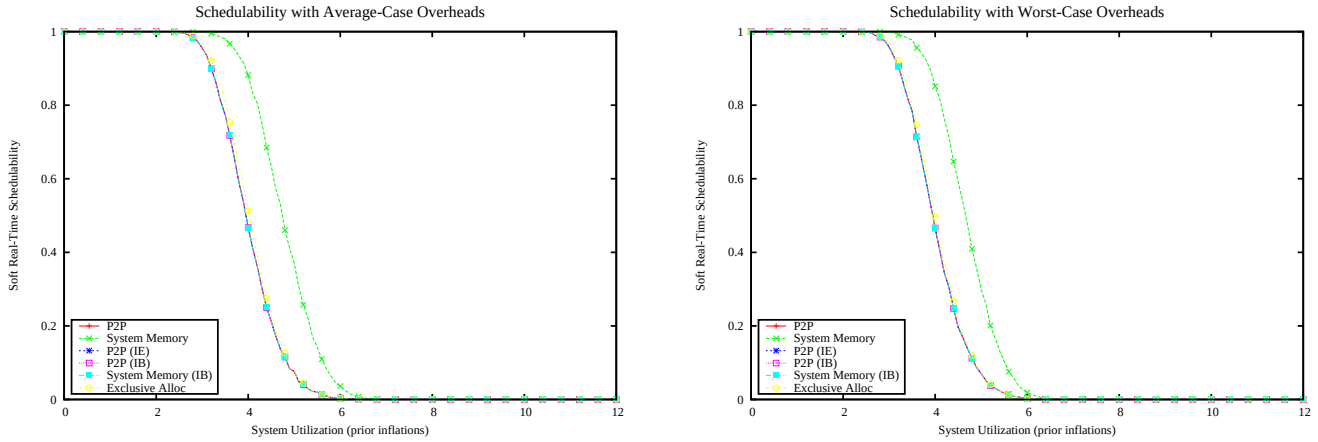

Figure 165: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

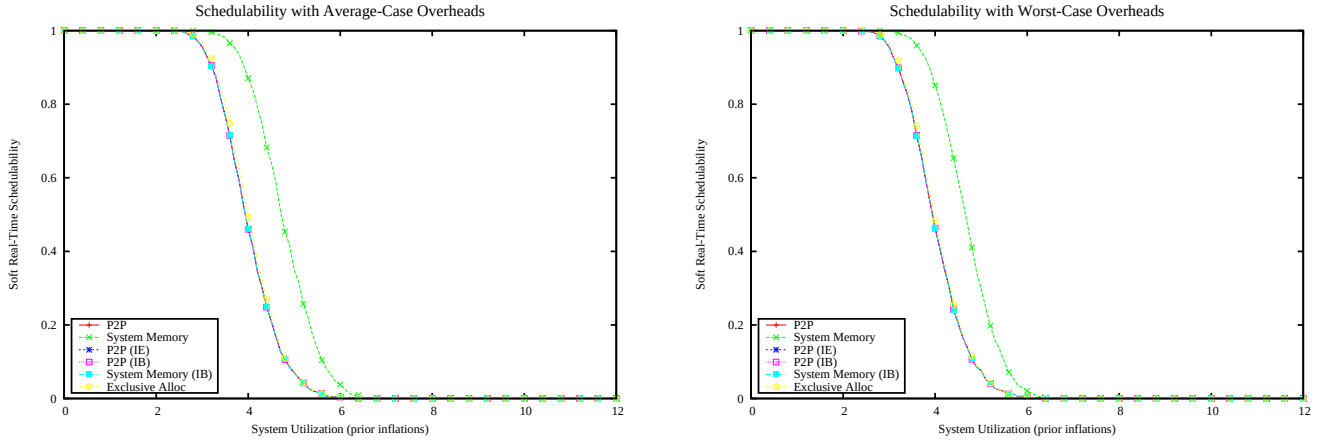

Figure 166: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

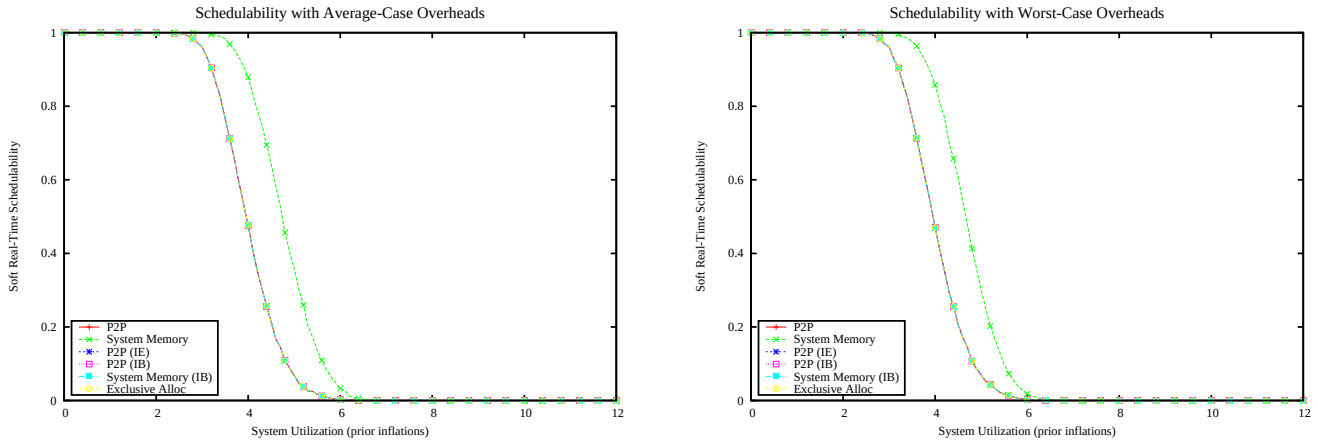

Figure 167: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

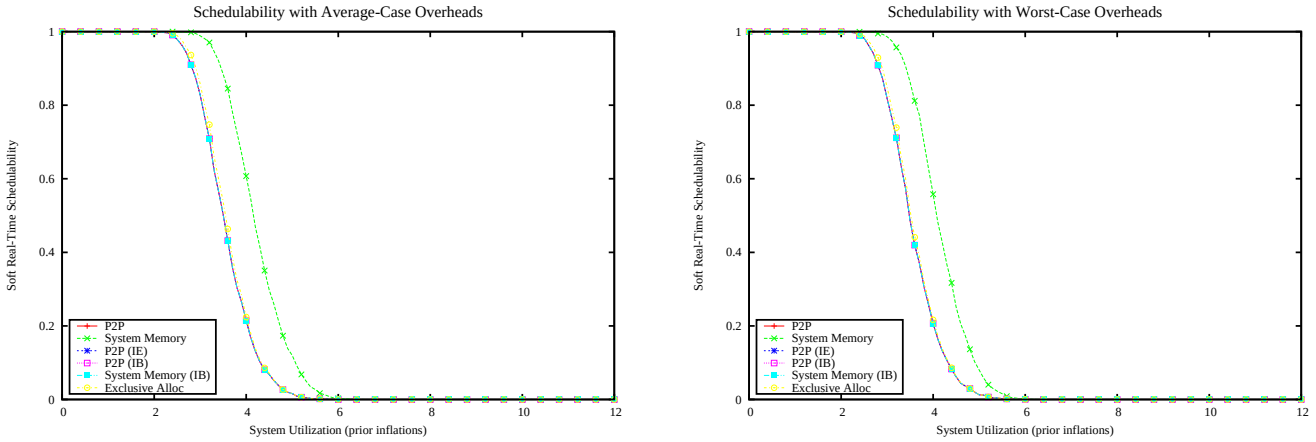

Figure 168: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

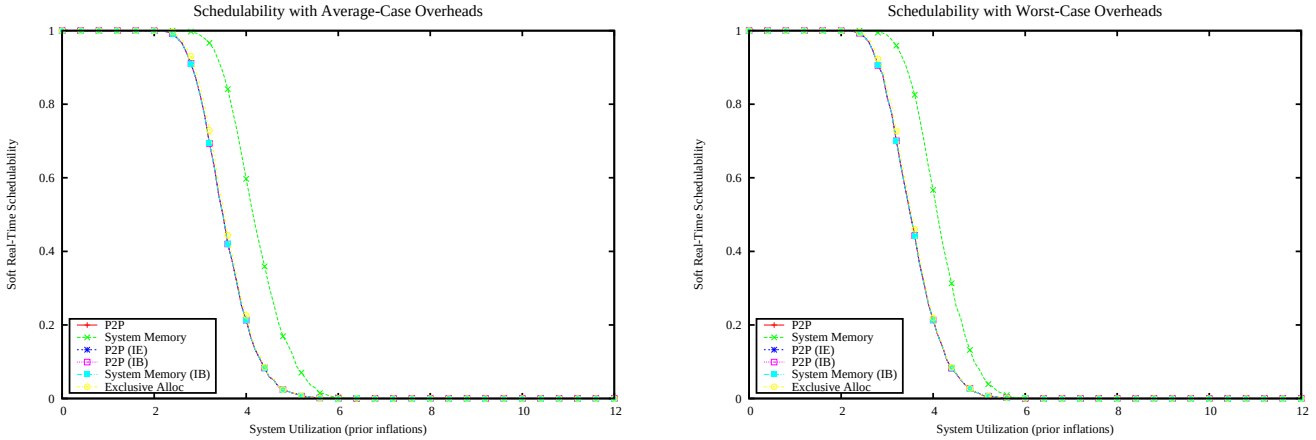

Figure 169: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

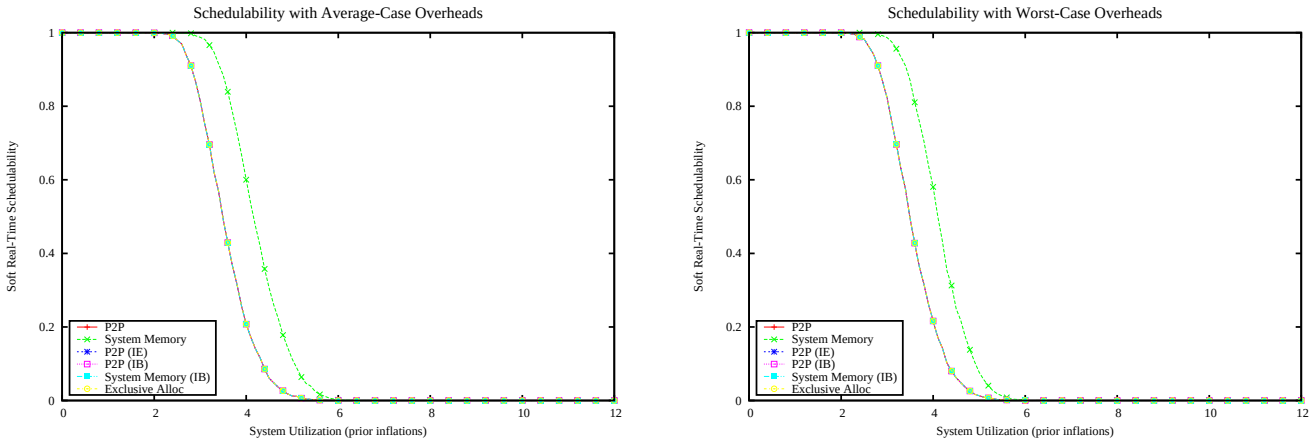

Figure 170: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

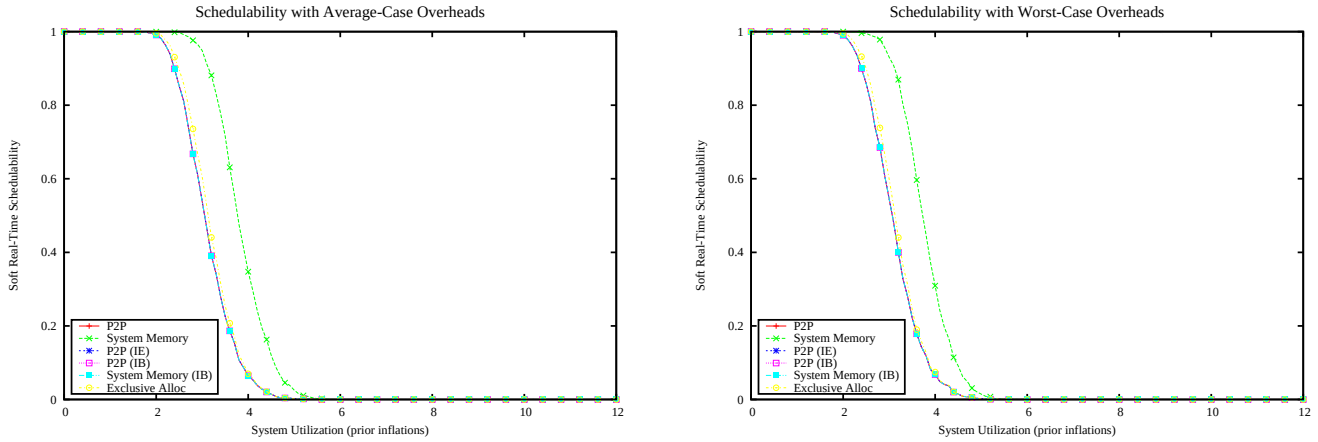

Figure 171: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

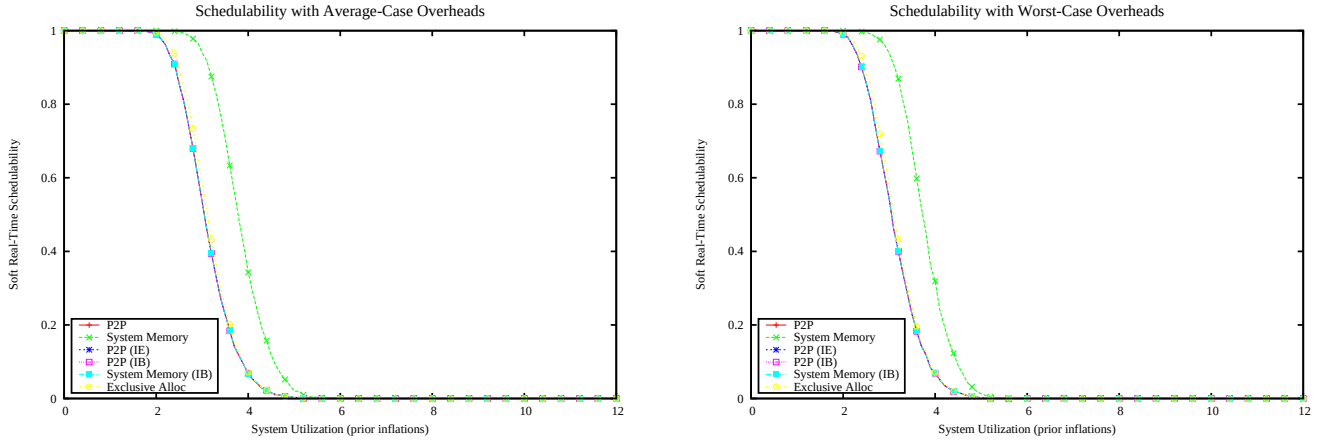

Figure 172: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

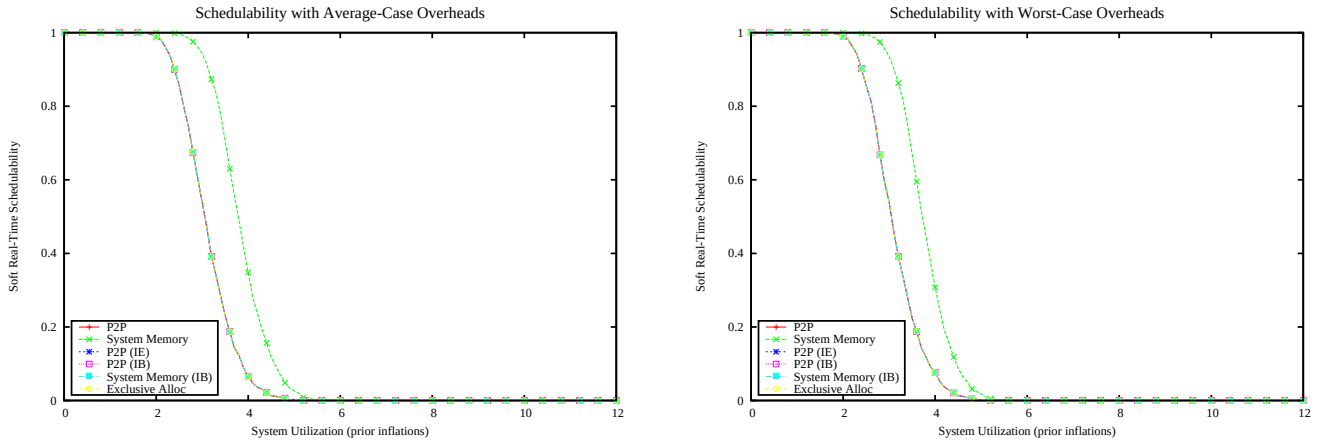

Figure 173: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

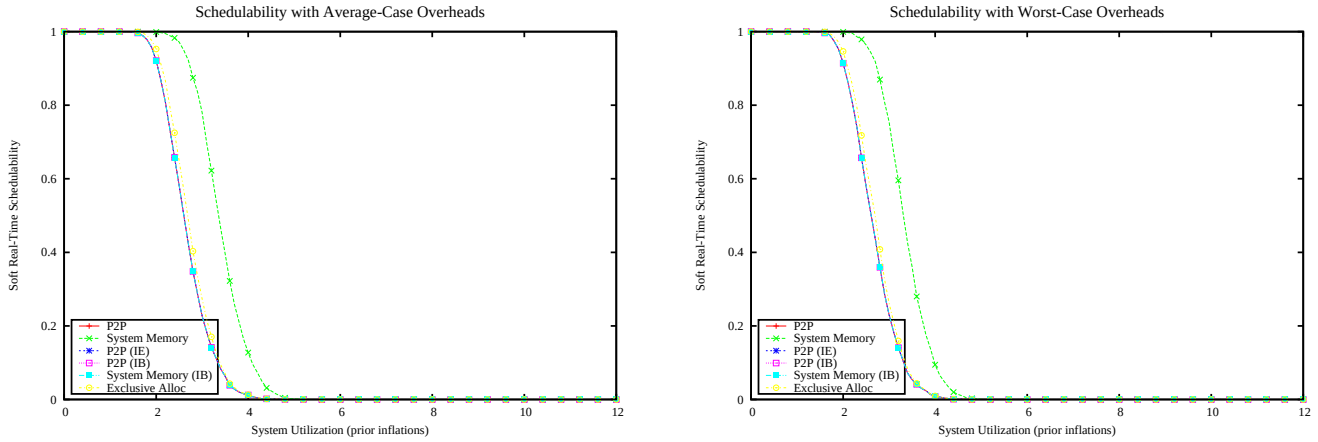

Figure 174: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

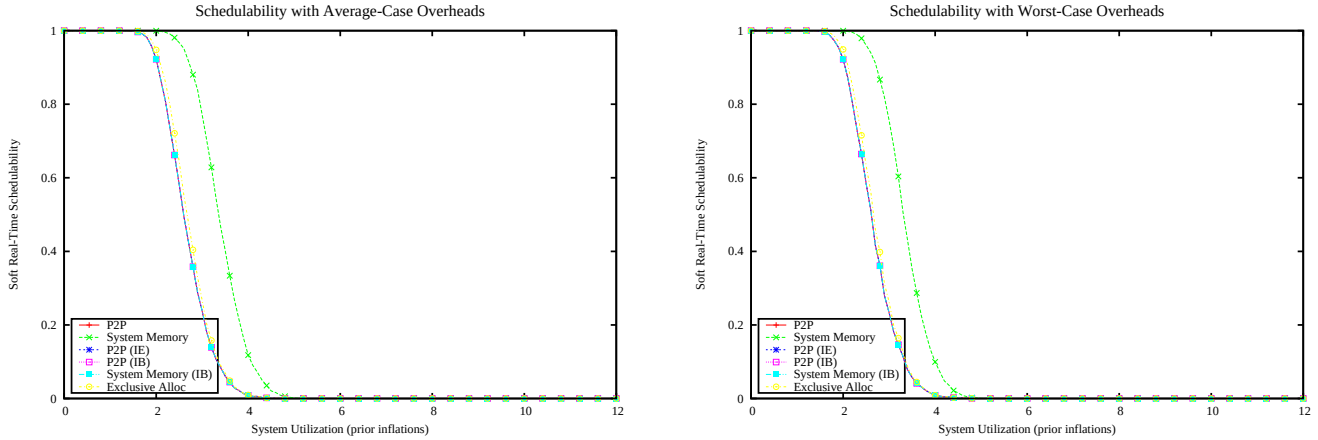

Figure 175: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

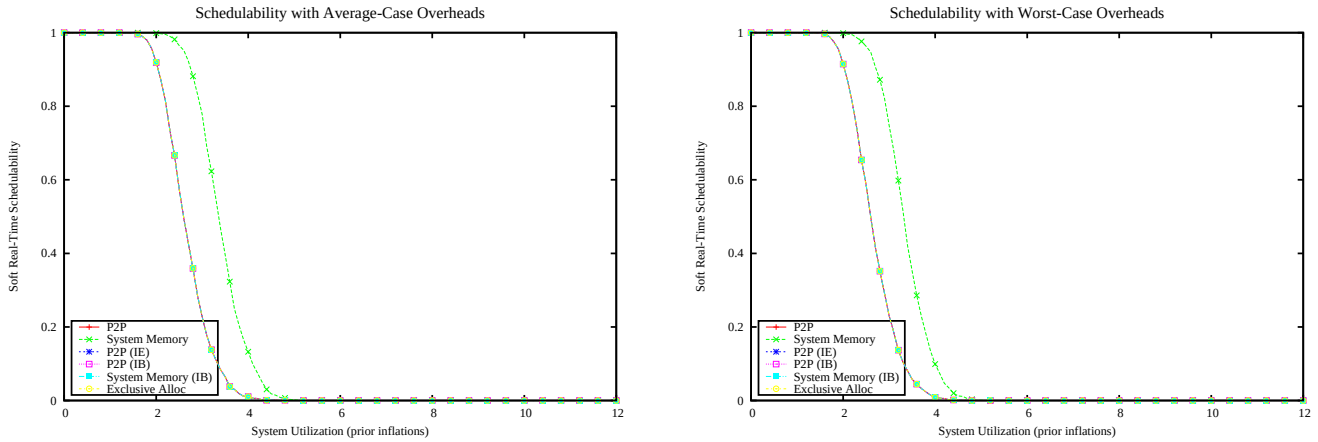

Figure 176: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

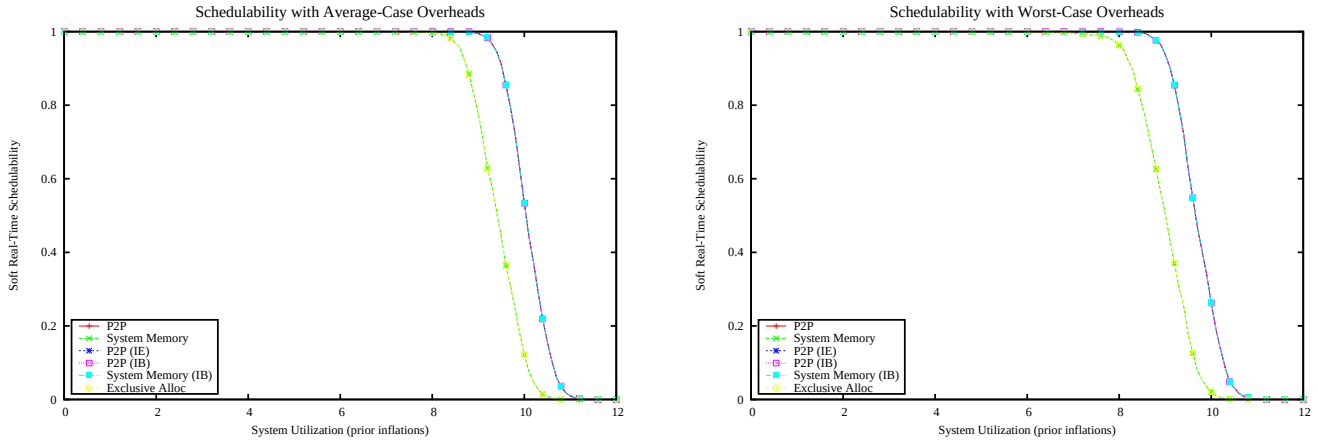

Figure 177: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

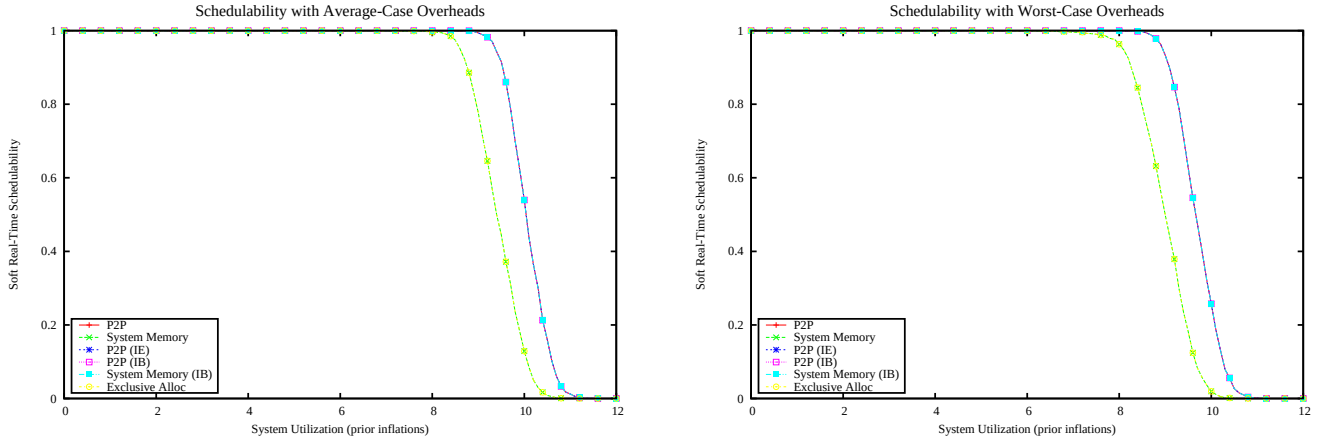

Figure 178: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

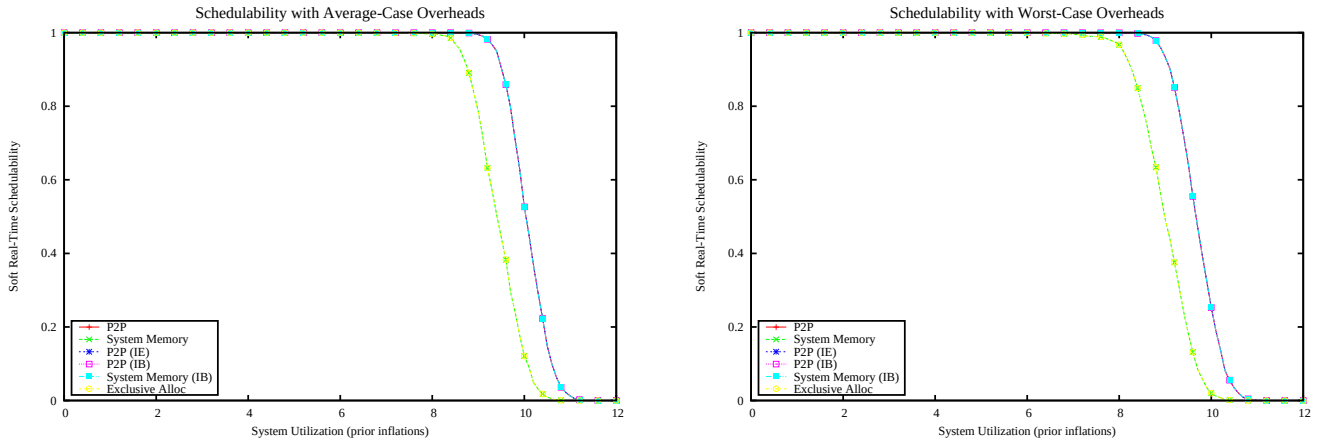

Figure 179: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

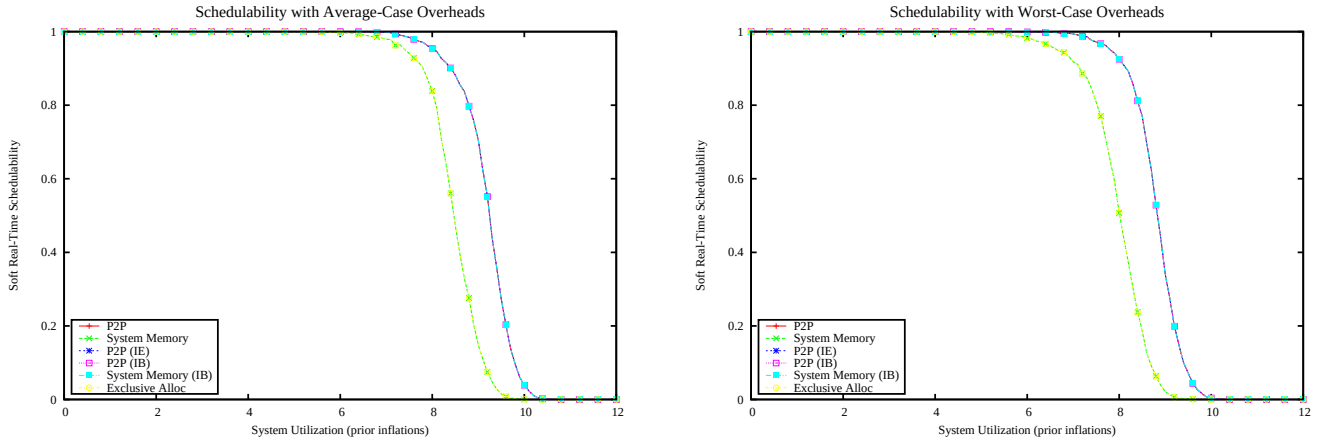

Figure 180: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

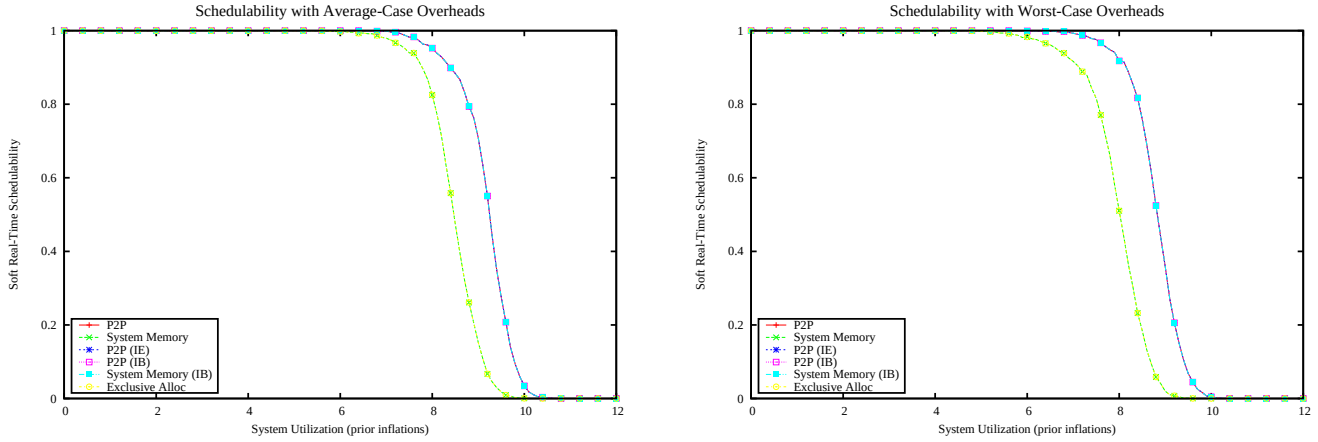

Figure 181: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

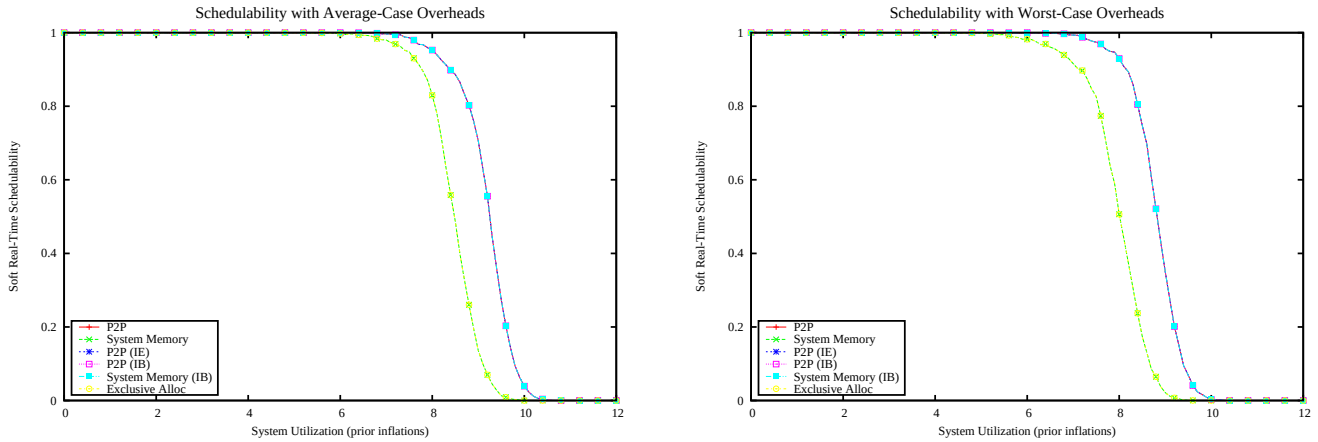

Figure 182: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

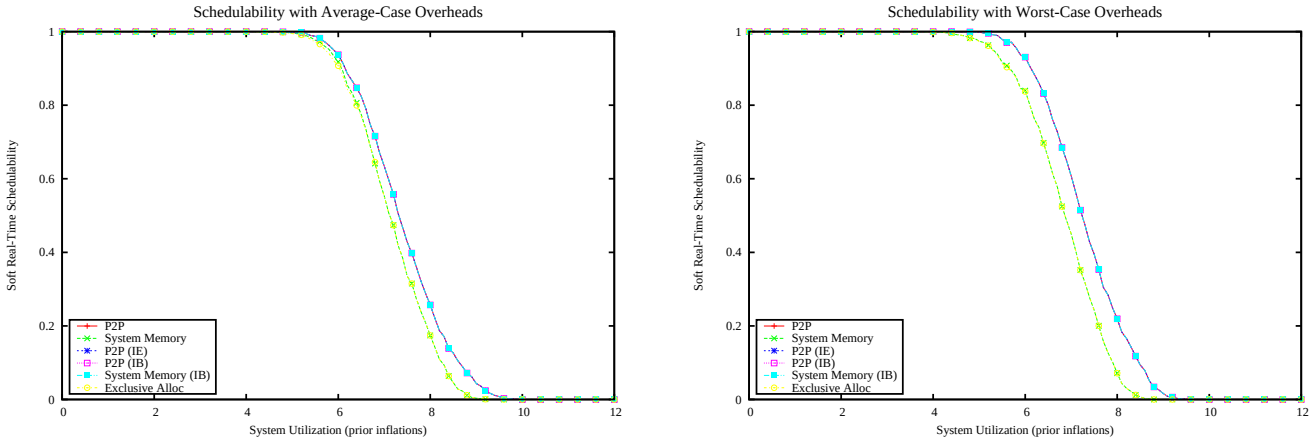

Figure 183: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

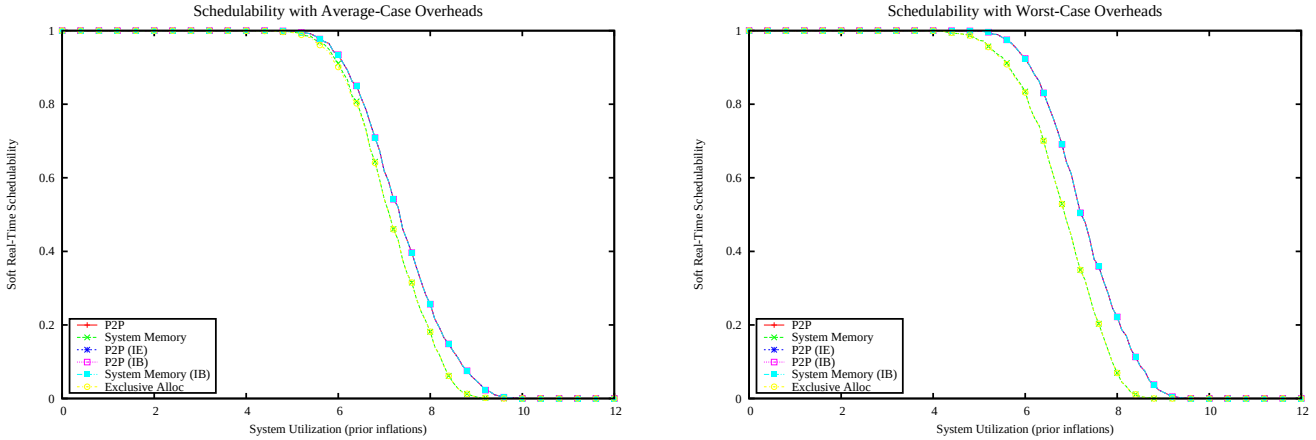

Figure 184: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

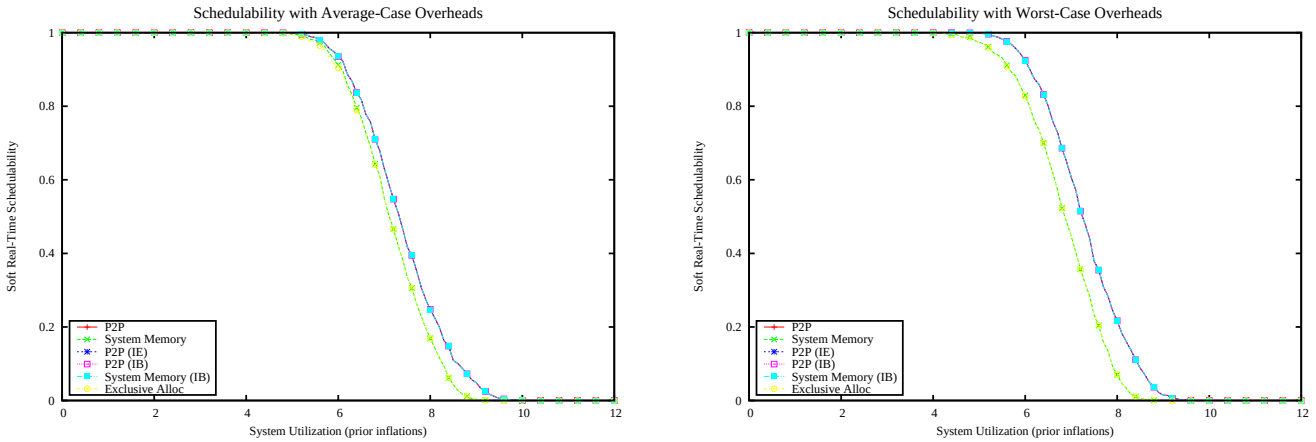

Figure 185: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

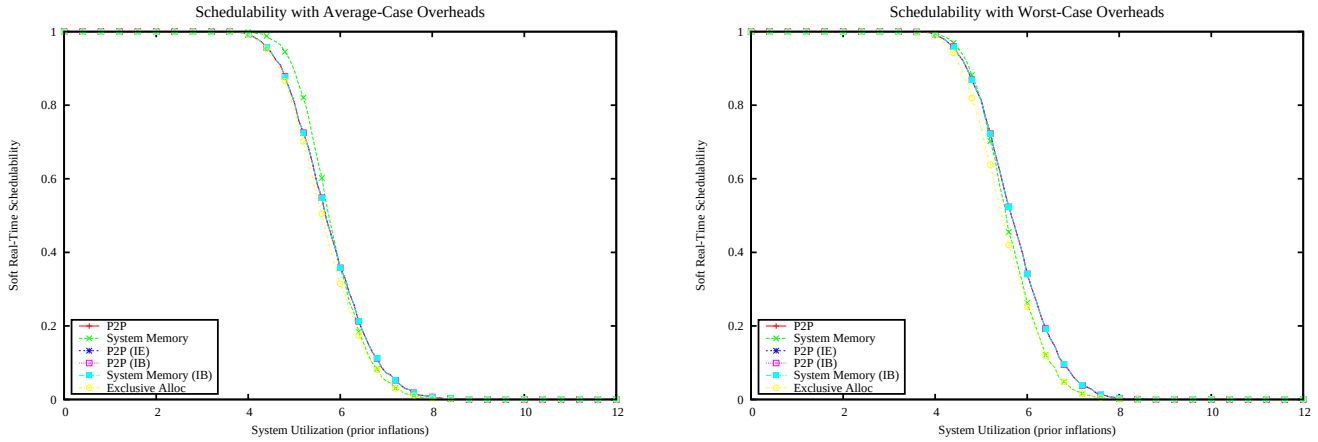

Figure 186: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

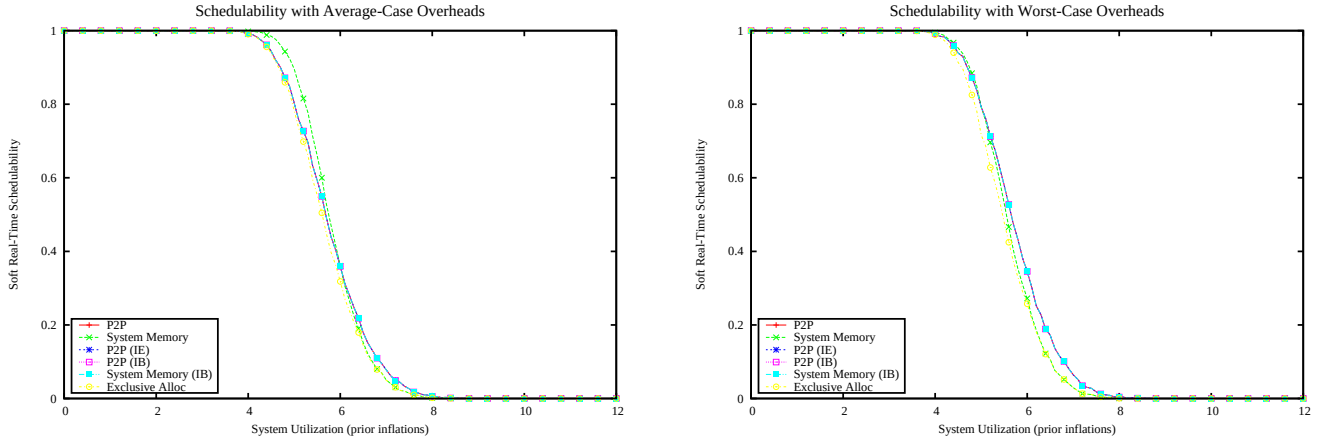

Figure 187: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

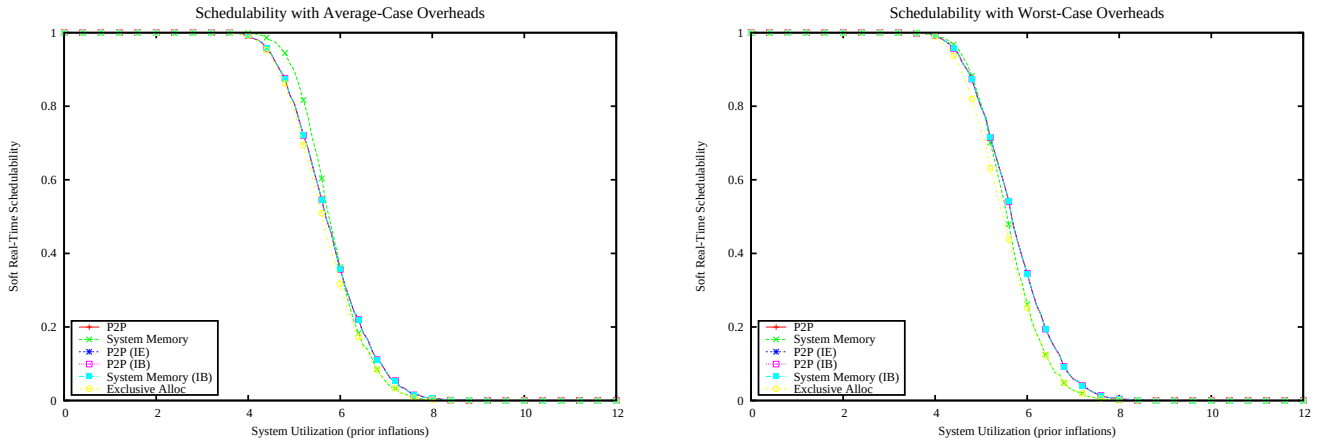

Figure 188: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

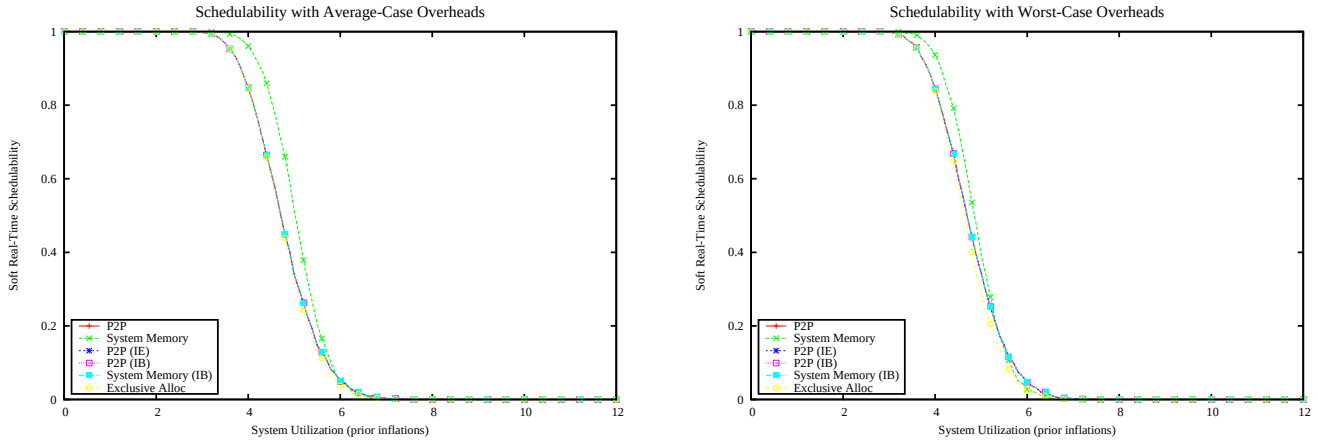

Figure 189: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

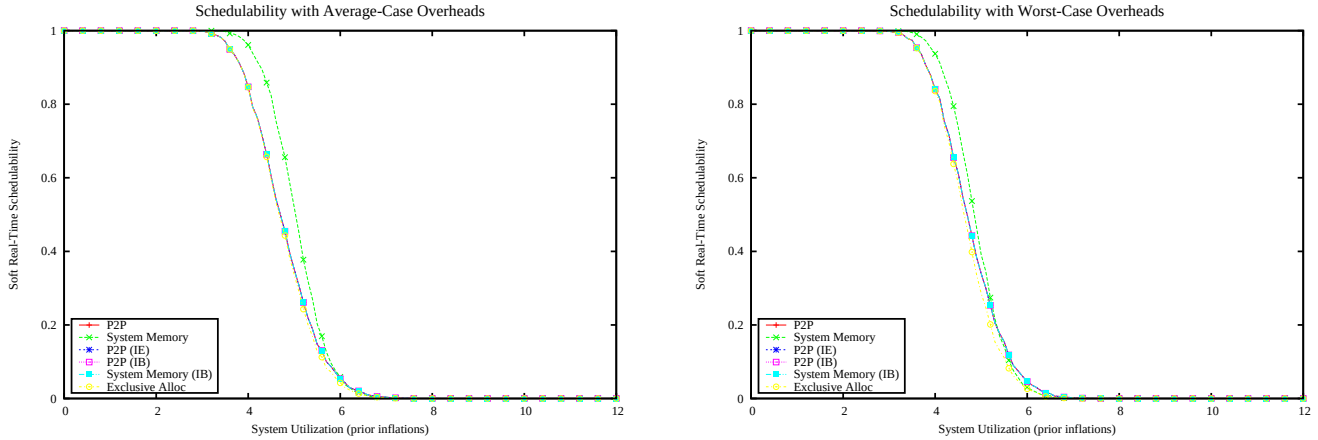

Figure 190: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

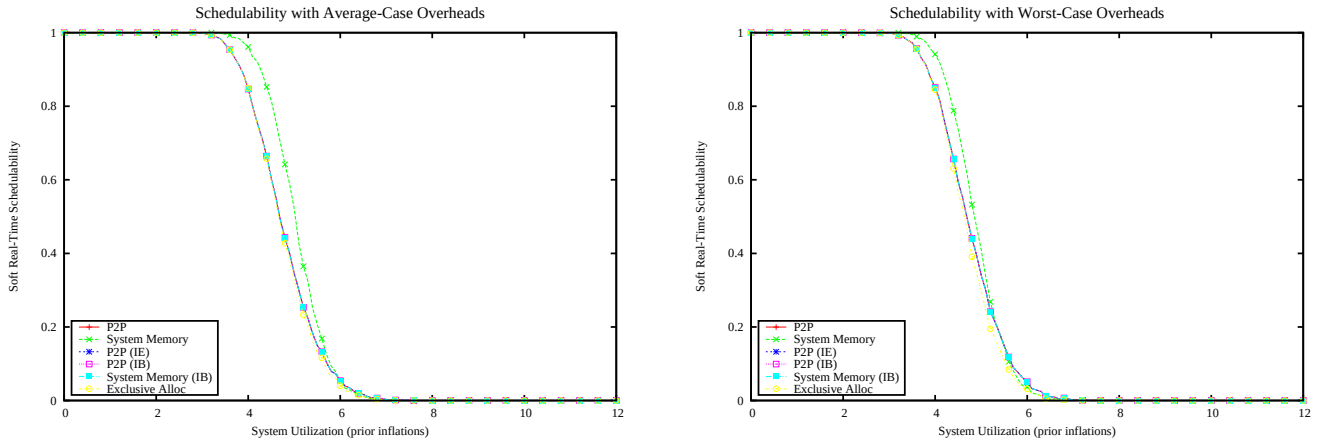

Figure 191: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

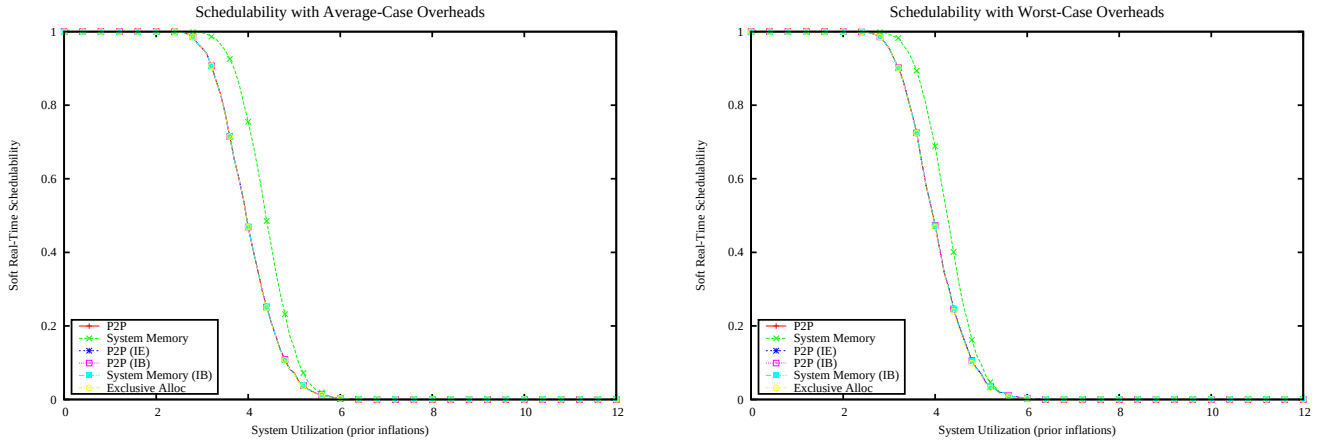

Figure 192: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

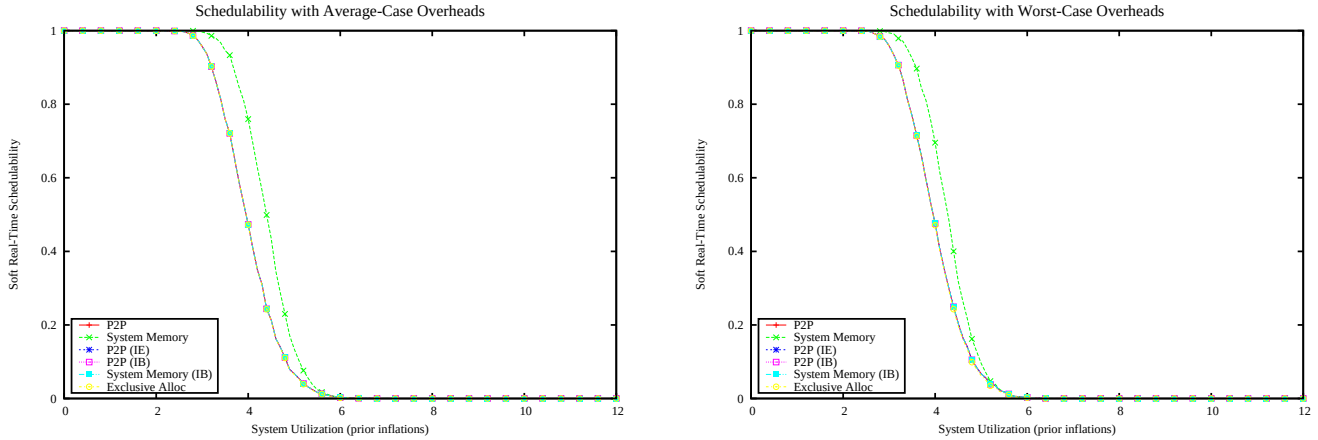

Figure 193: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

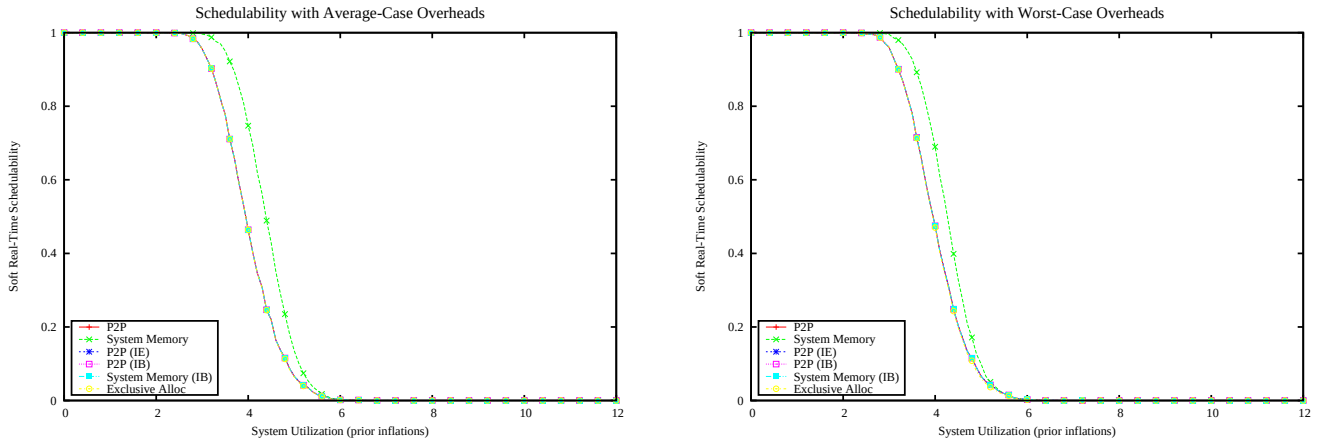

Figure 194: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

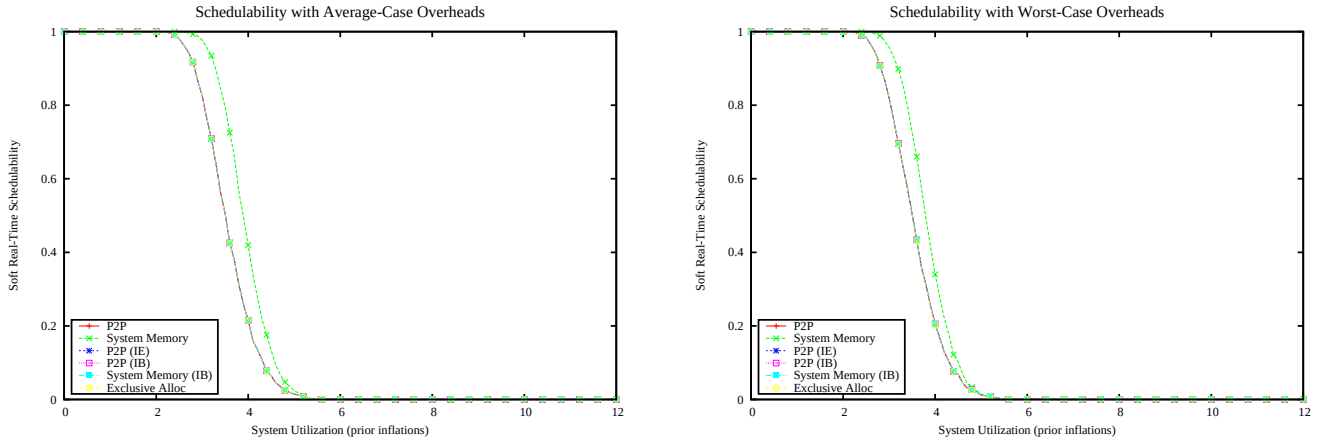

Figure 195: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

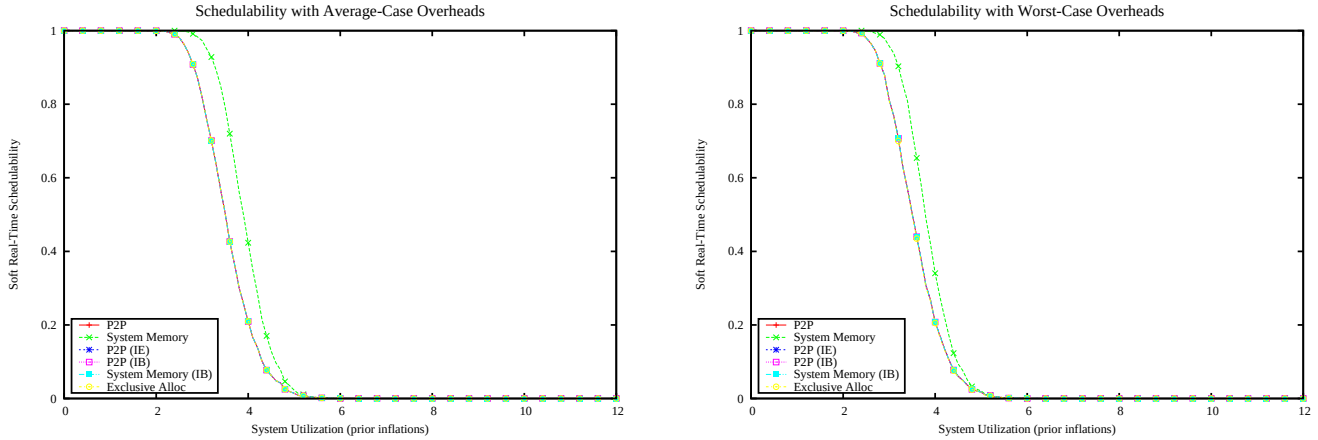

Figure 196: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

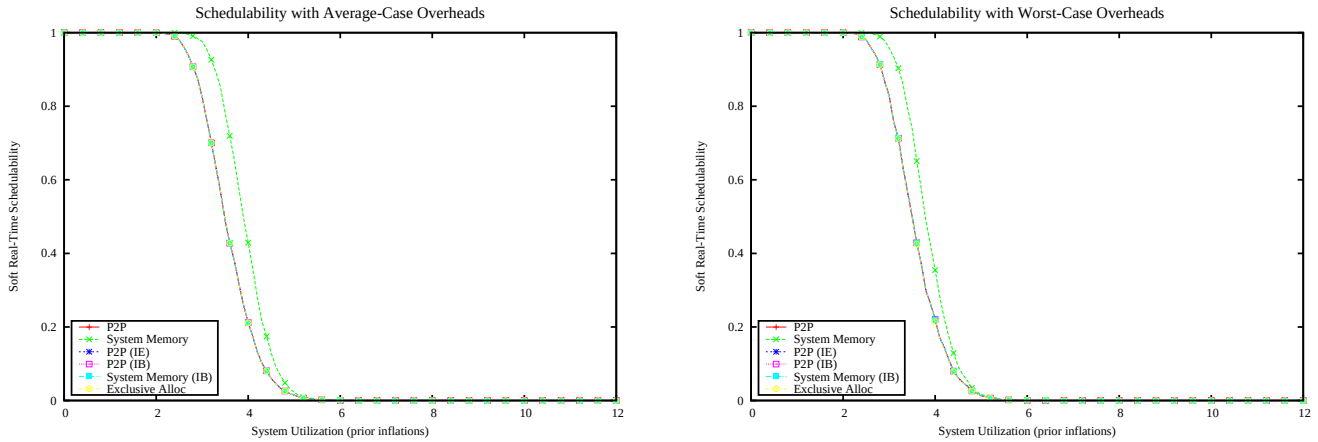

Figure 197: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

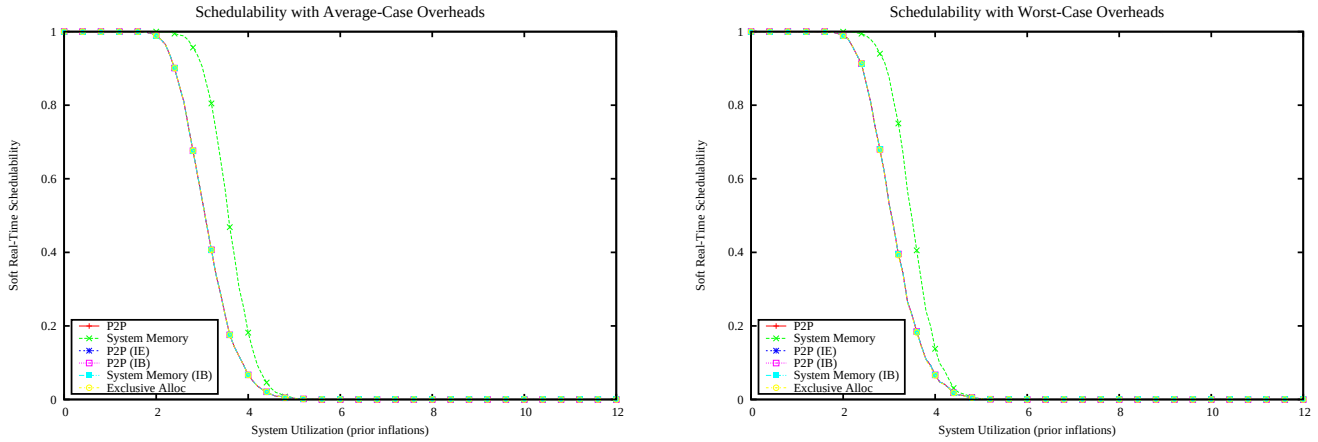

Figure 198: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

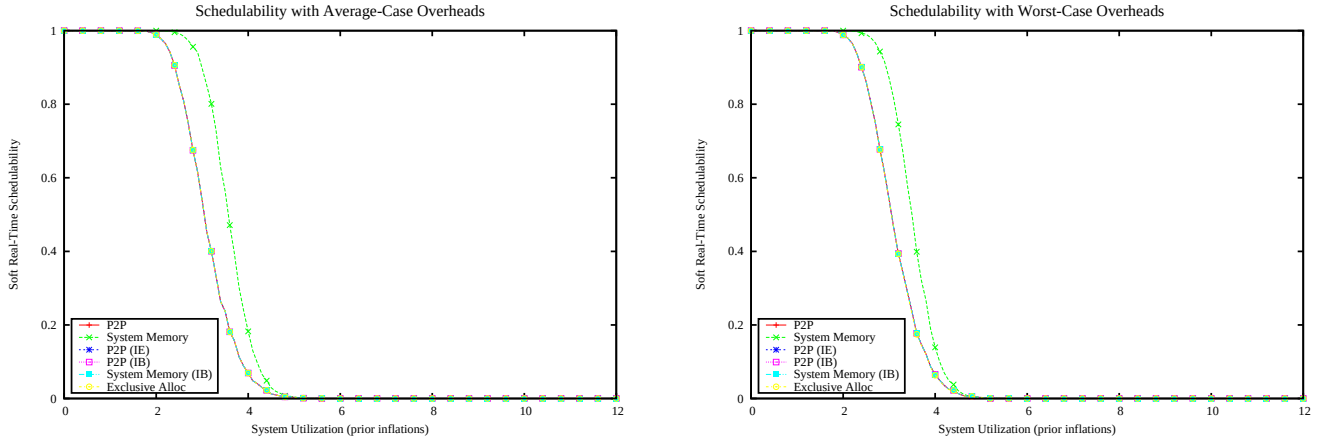

Figure 199: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

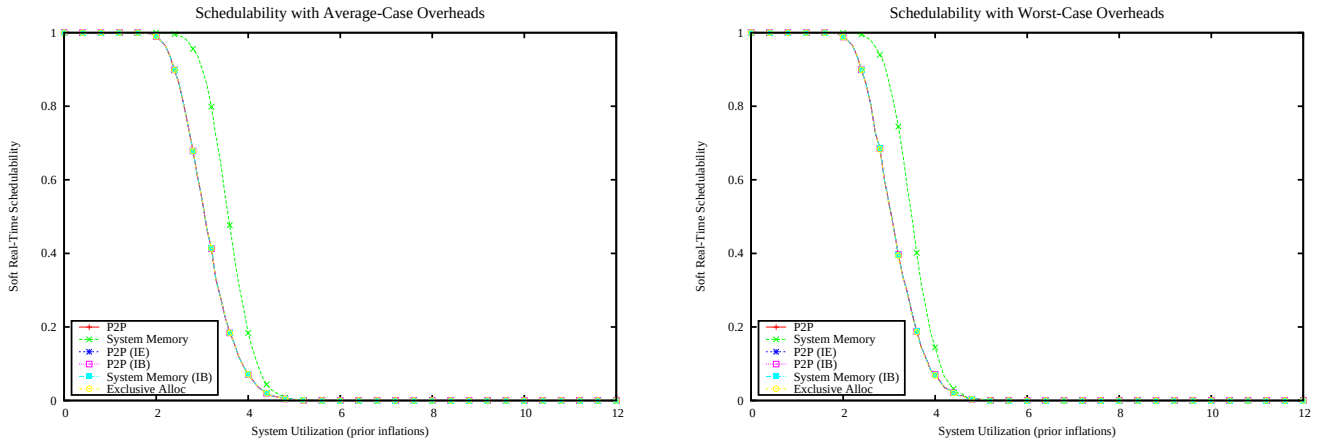

Figure 200: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

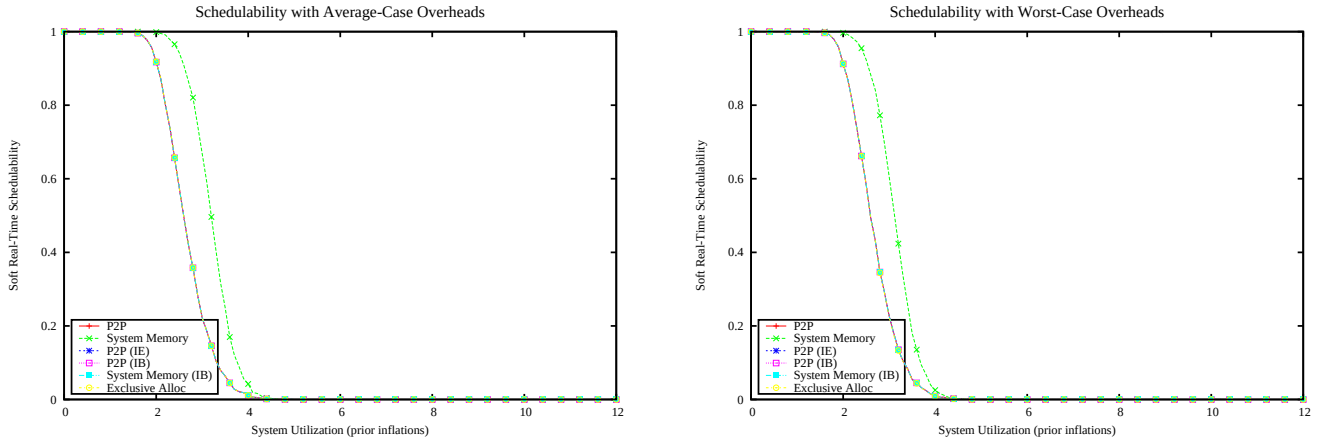

Figure 201: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

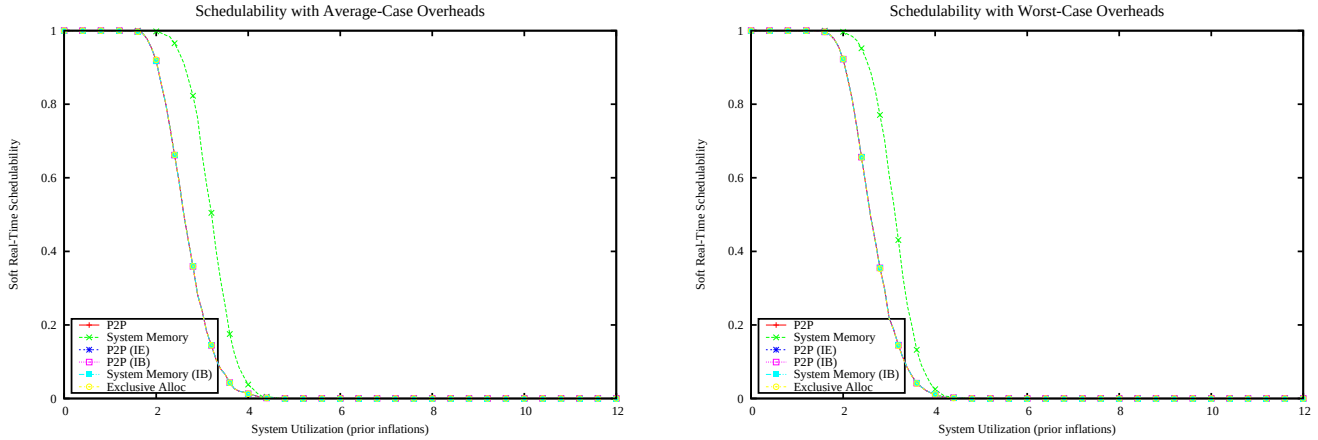

Figure 202: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

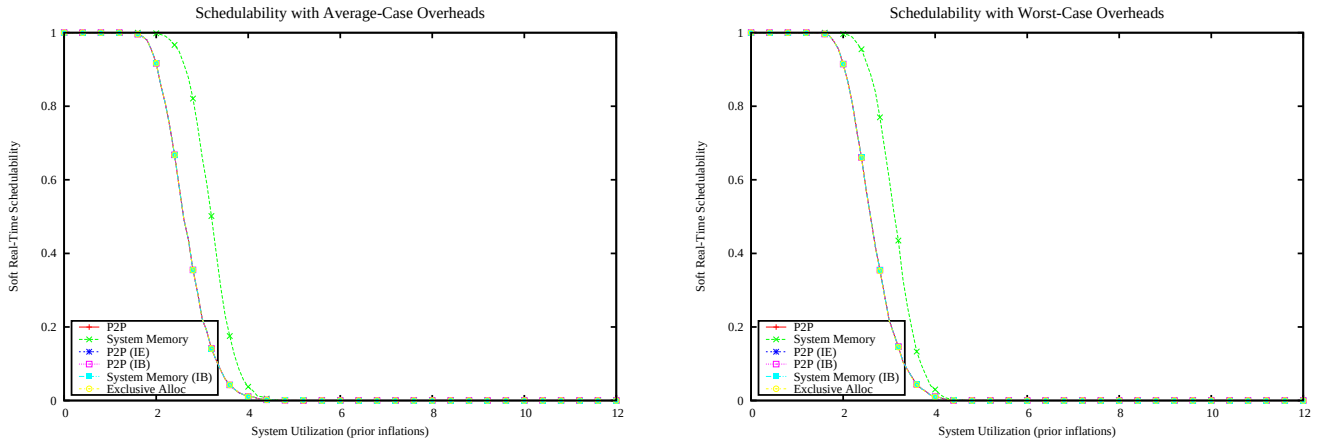

Figure 203: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

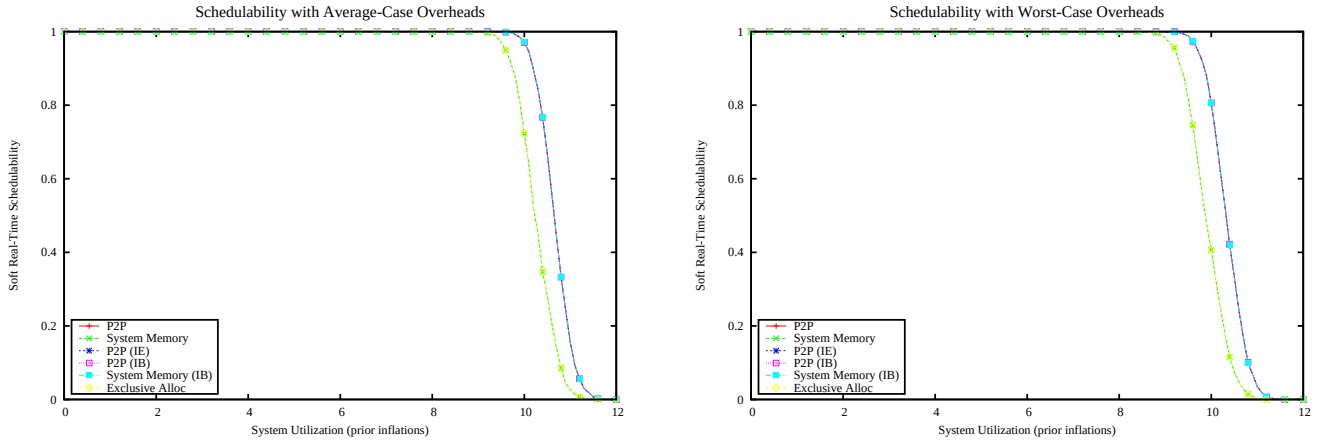

Figure 204: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

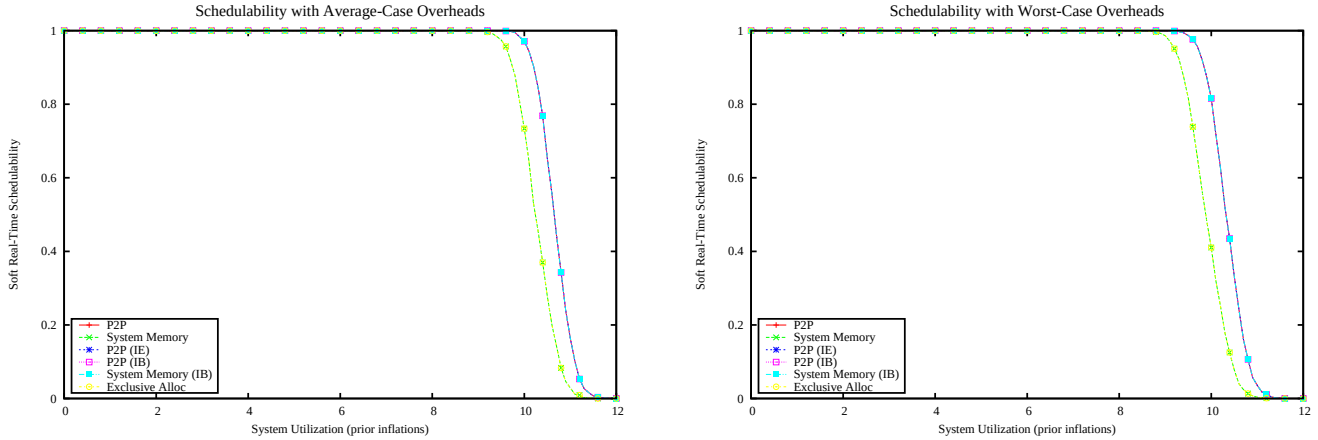

Figure 205: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

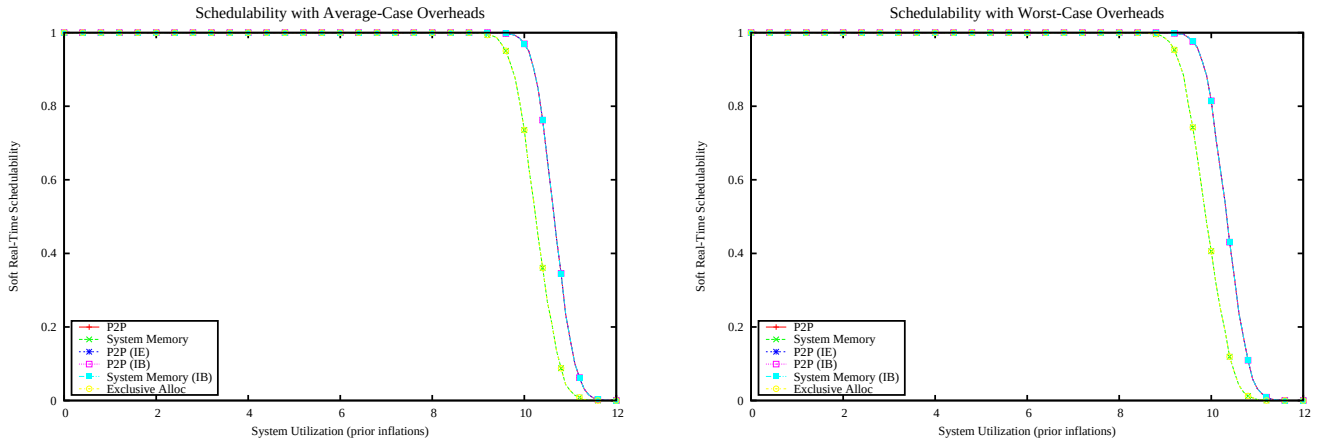

Figure 206: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

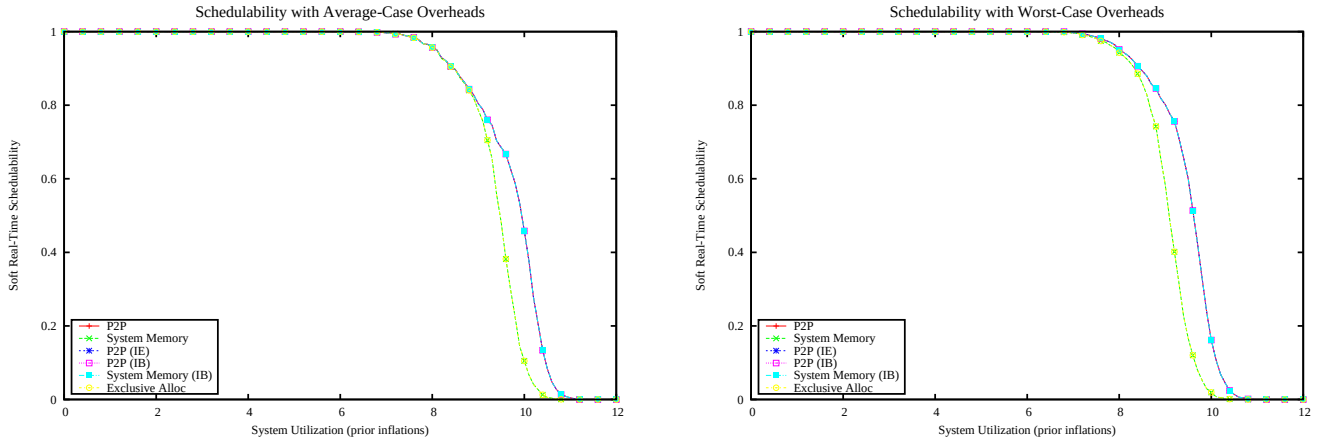

Figure 207: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

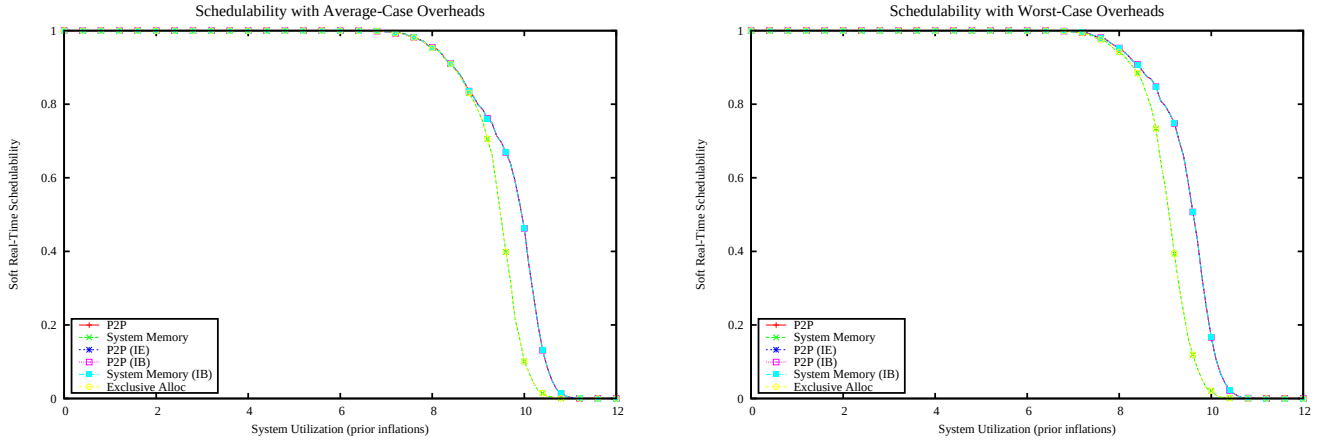

Figure 208: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

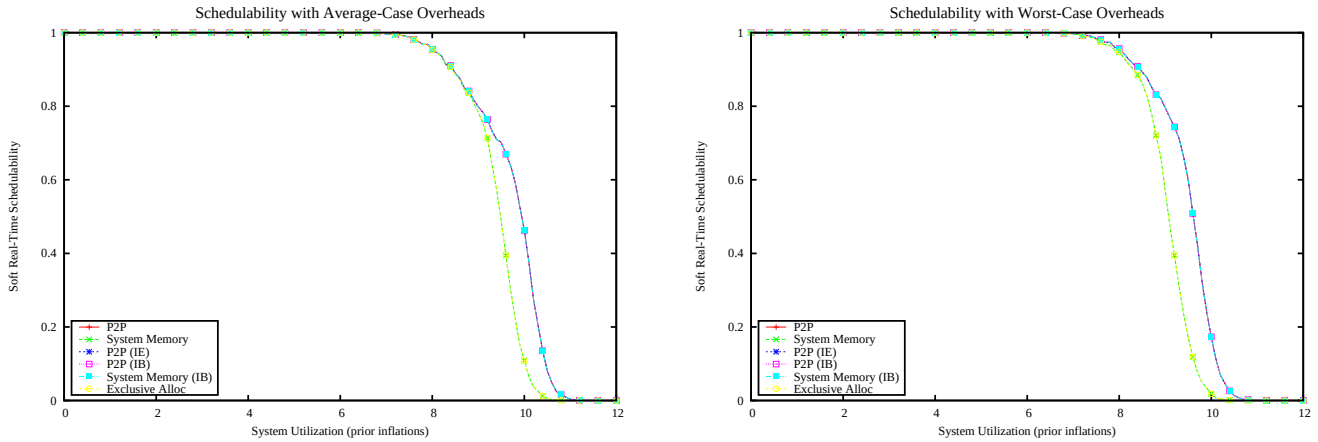

Figure 209: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

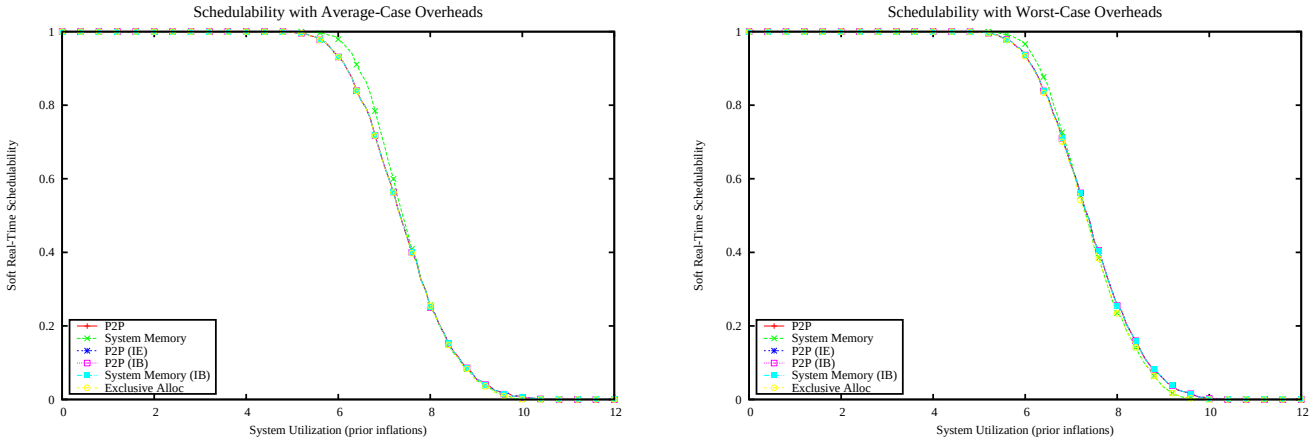

Figure 210: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

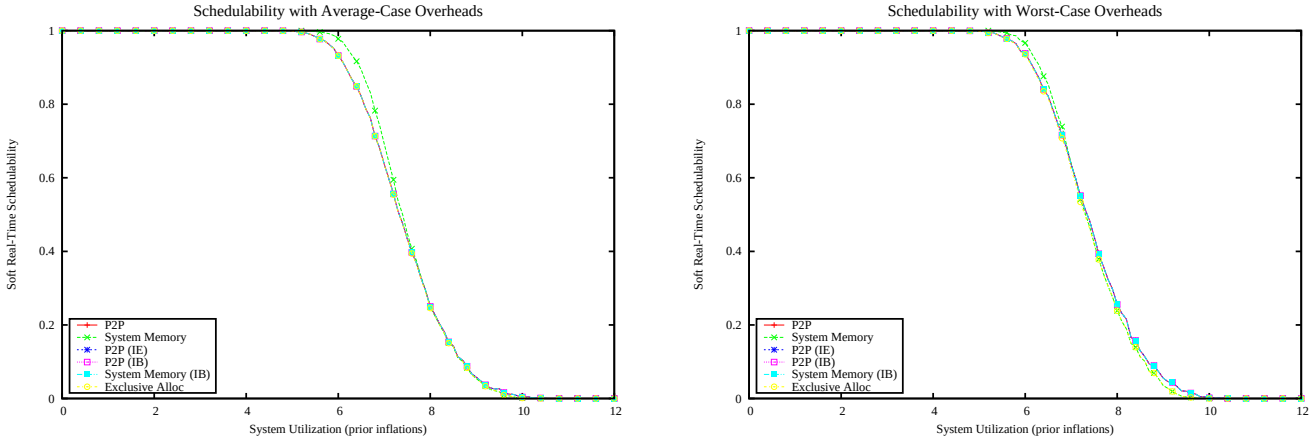

Figure 211: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

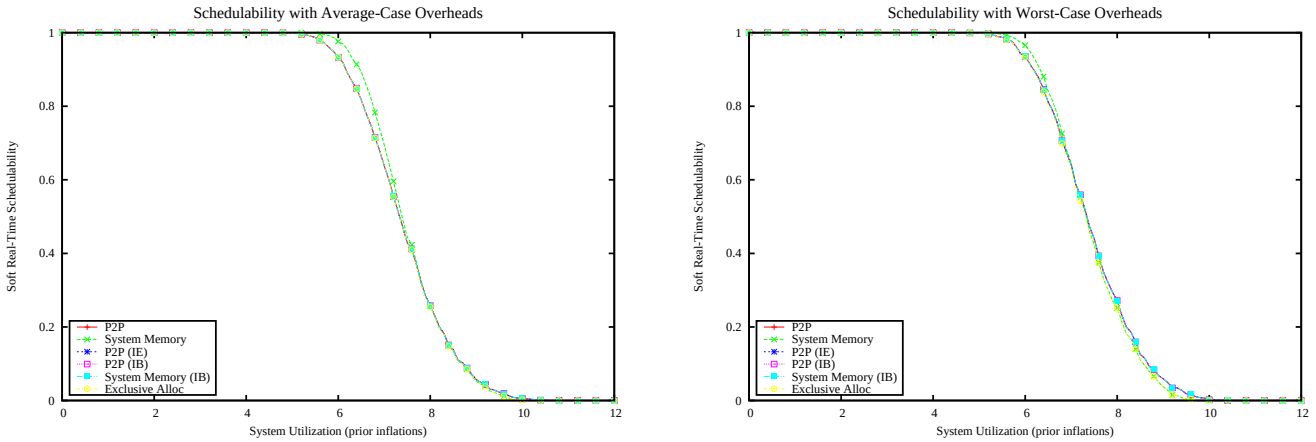

Figure 212: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

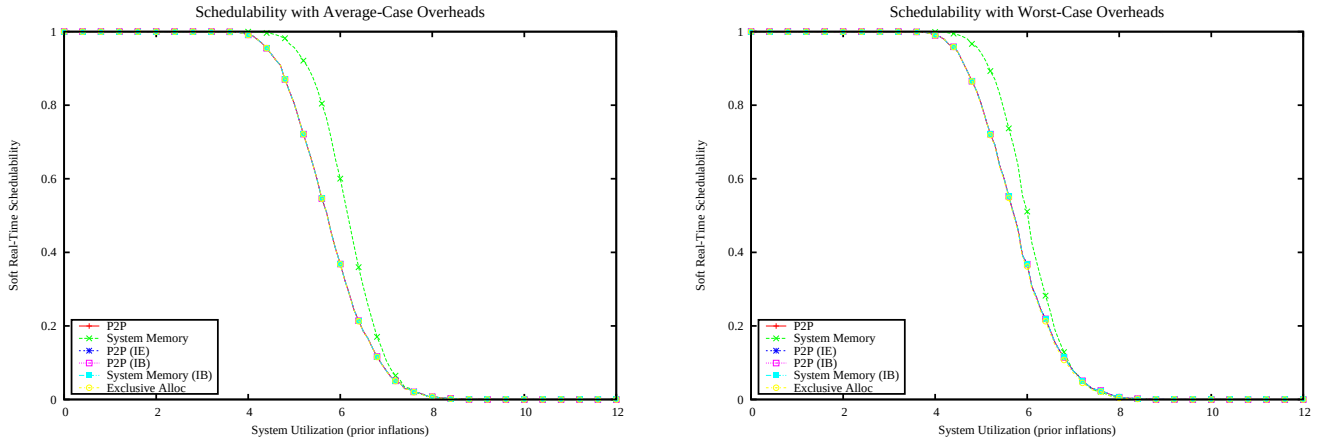

Figure 213: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

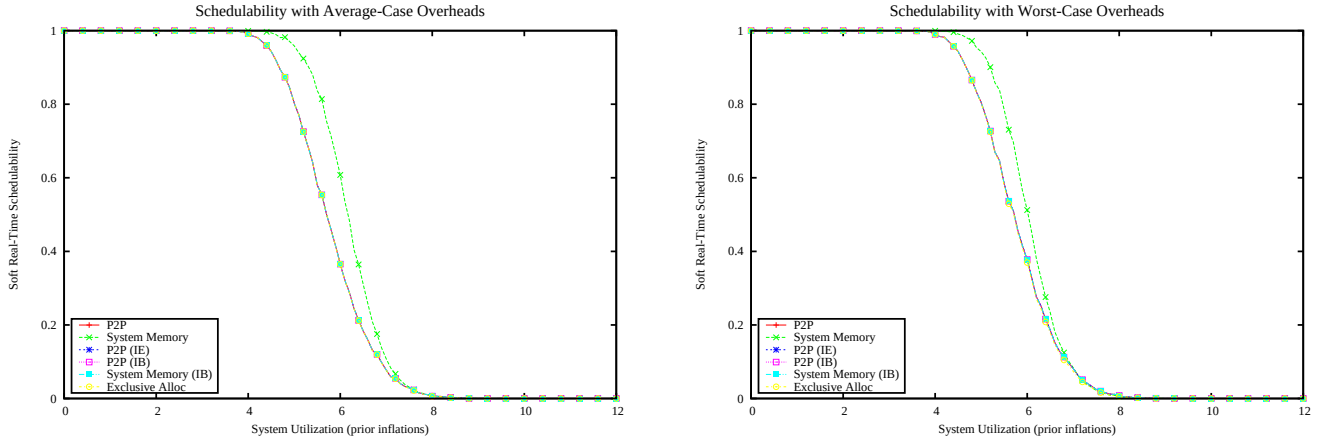

Figure 214: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

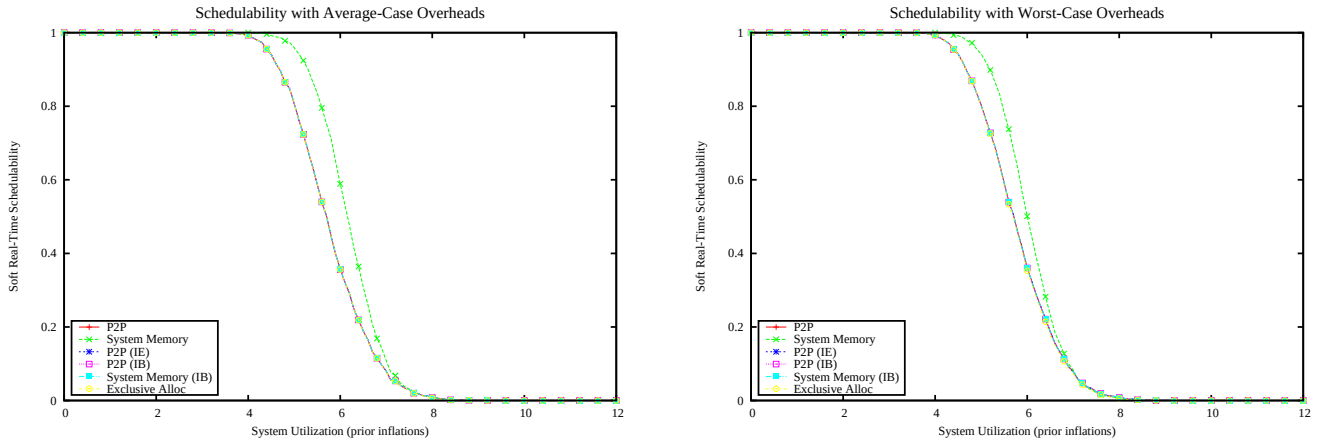

Figure 215: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

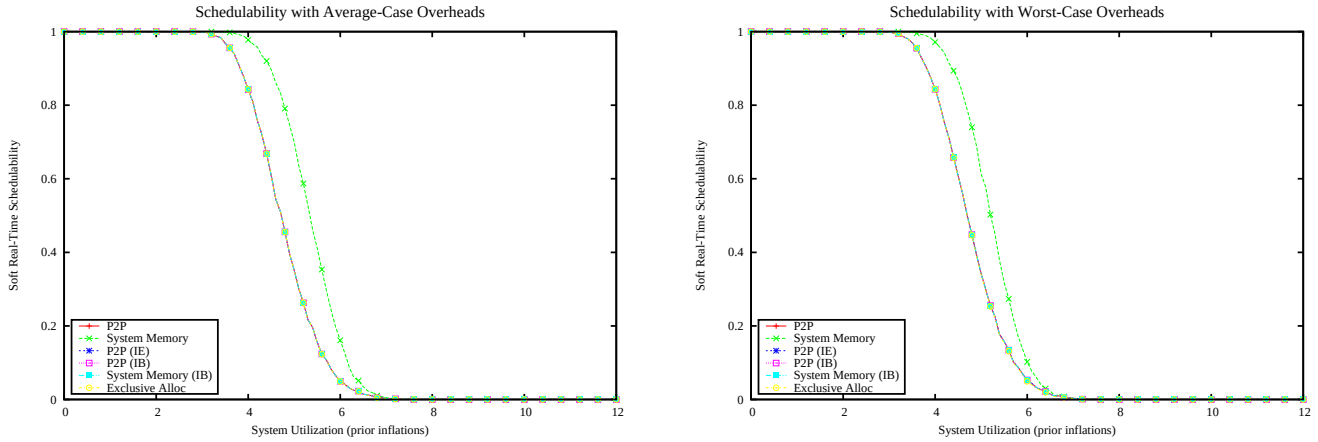

Figure 216: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

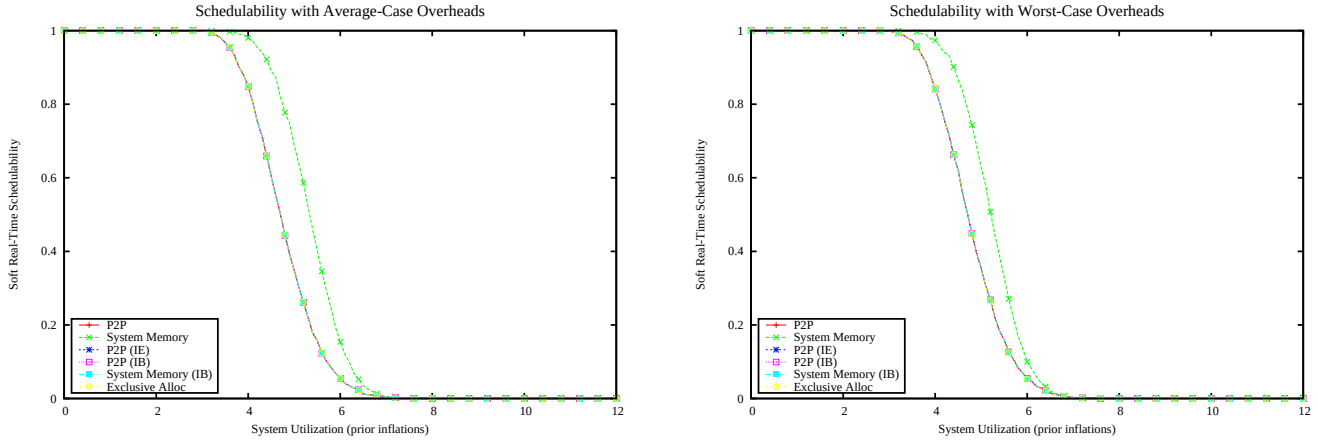

Figure 217: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

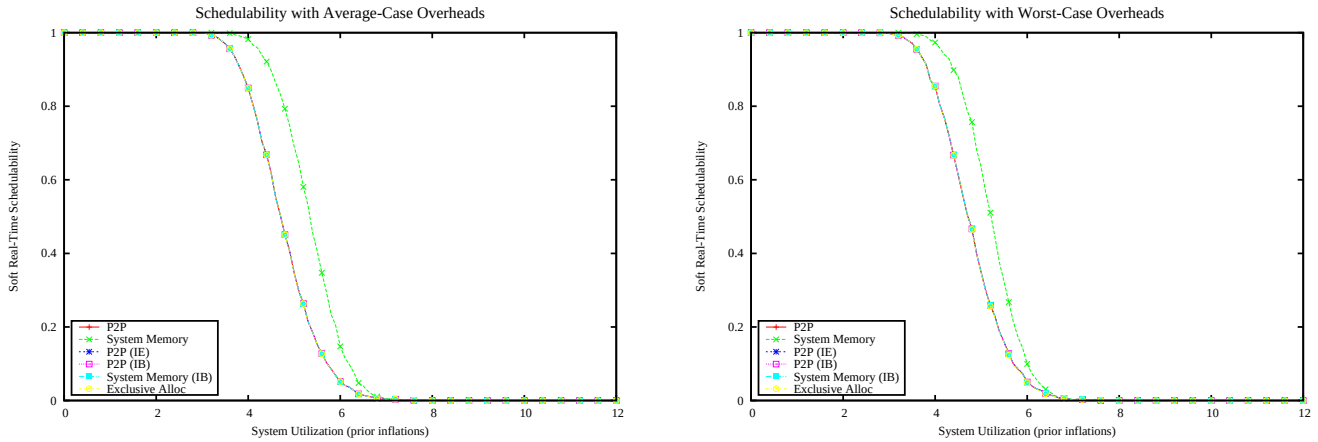

Figure 218: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

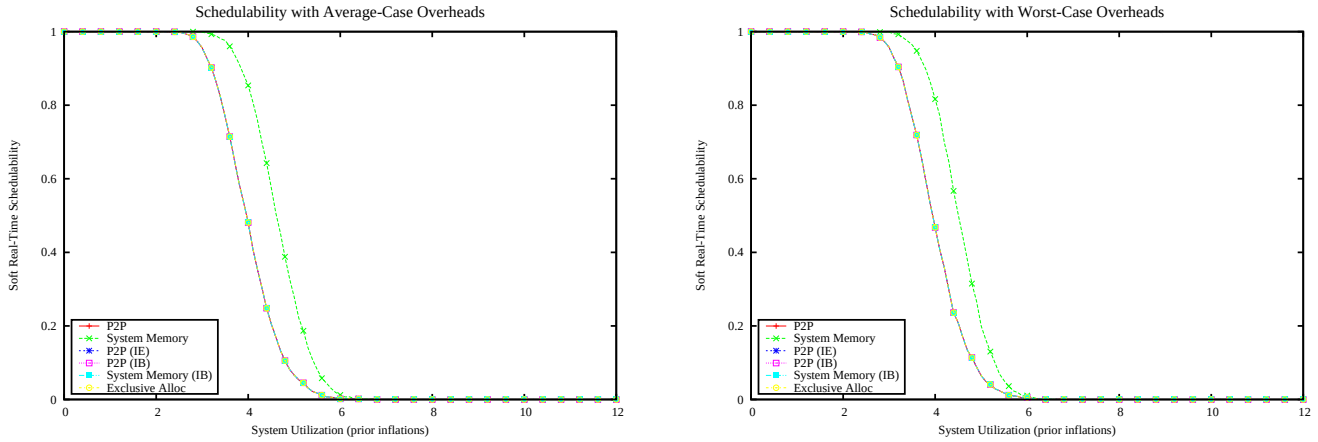

Figure 219: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

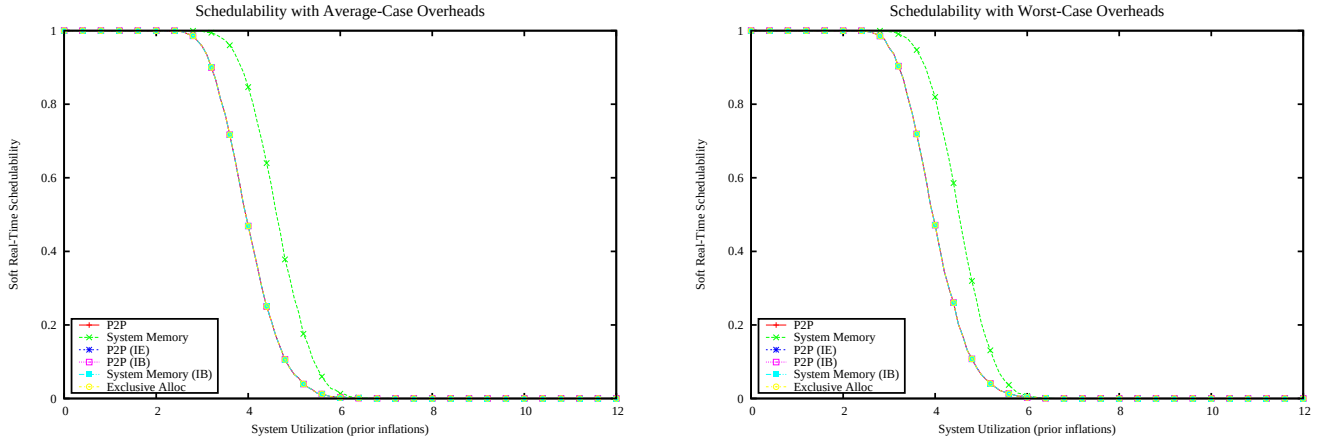

Figure 220: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

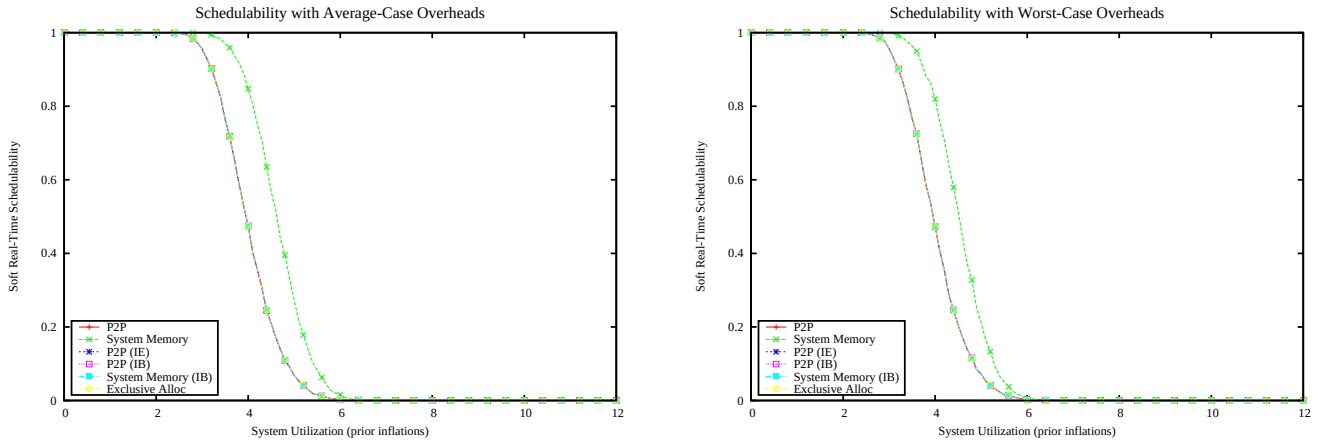

Figure 221: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

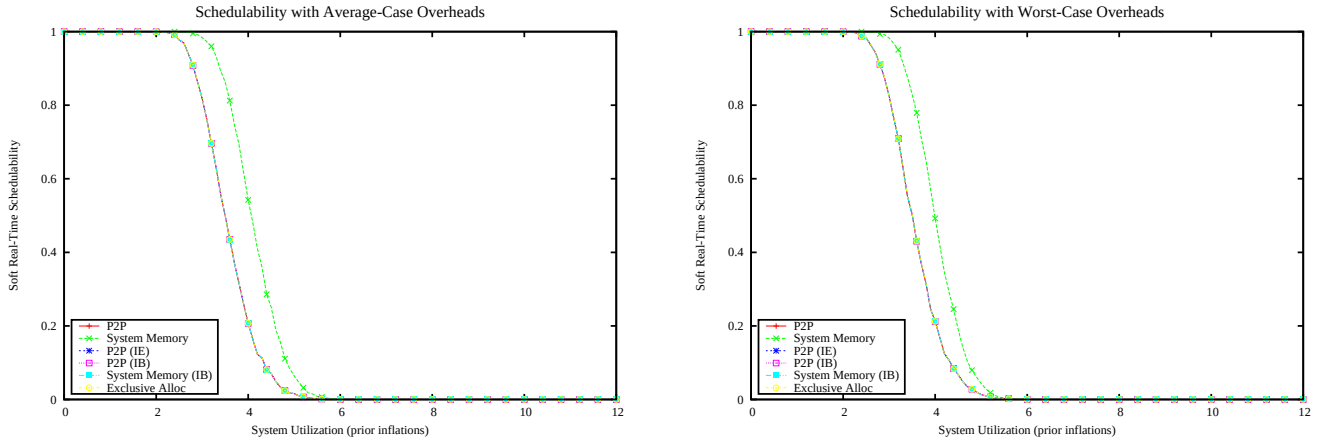

Figure 222: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

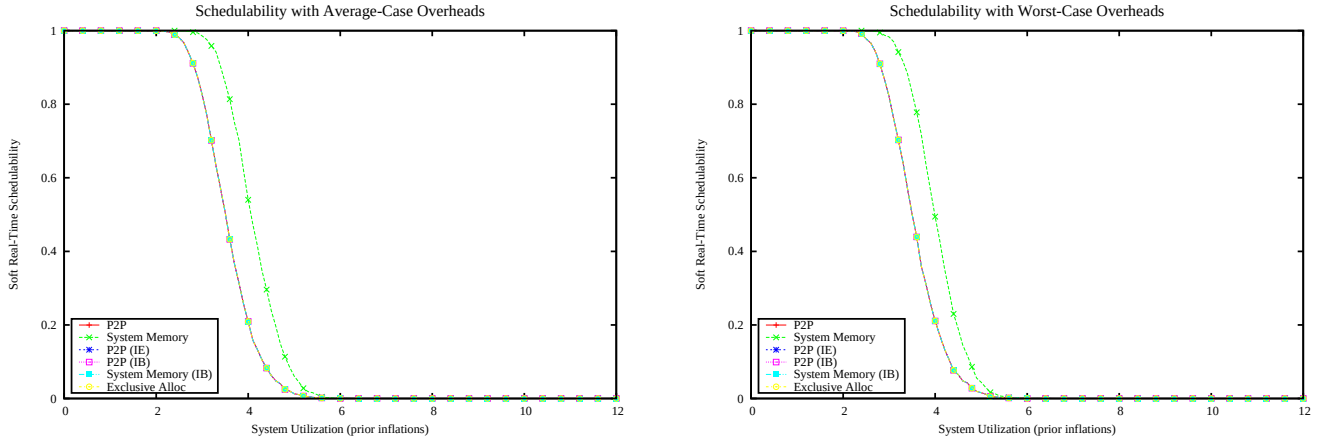

Figure 223: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

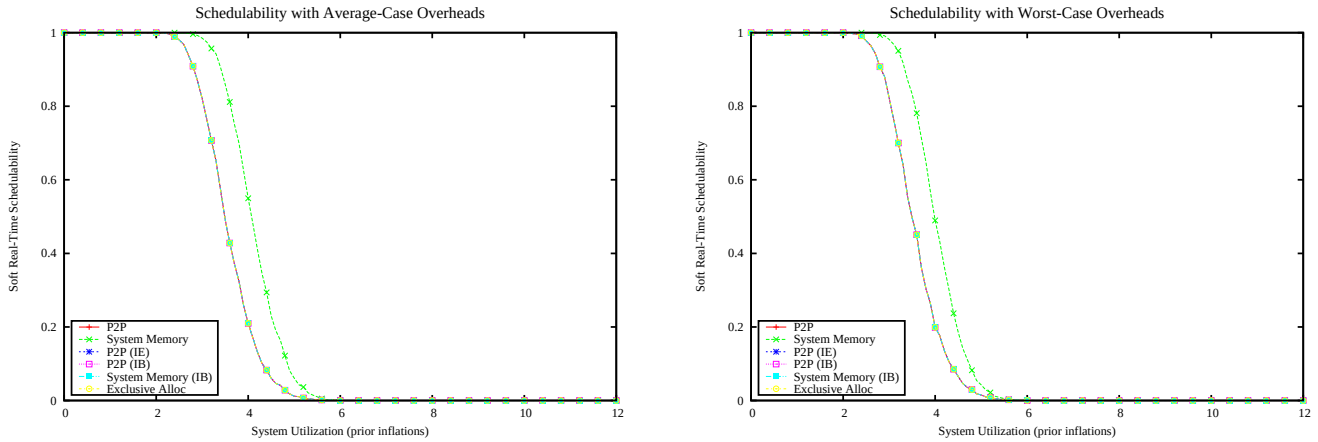

Figure 224: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

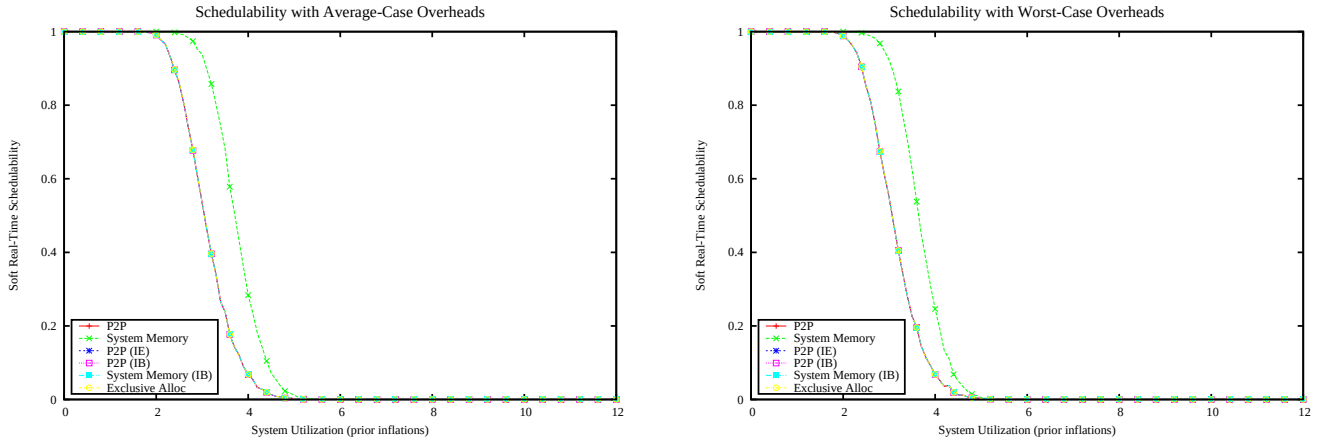

Figure 225: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

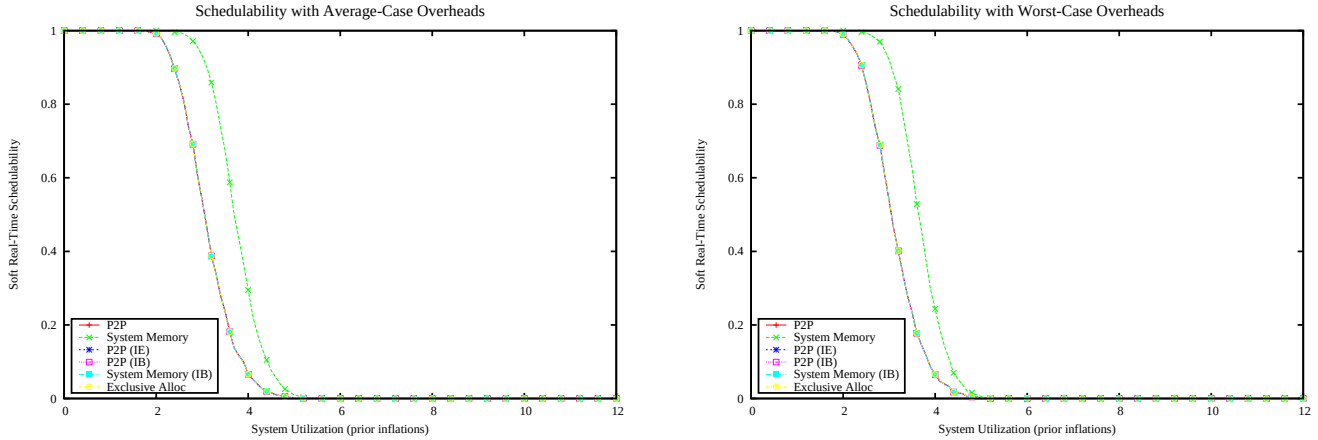

Figure 226: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

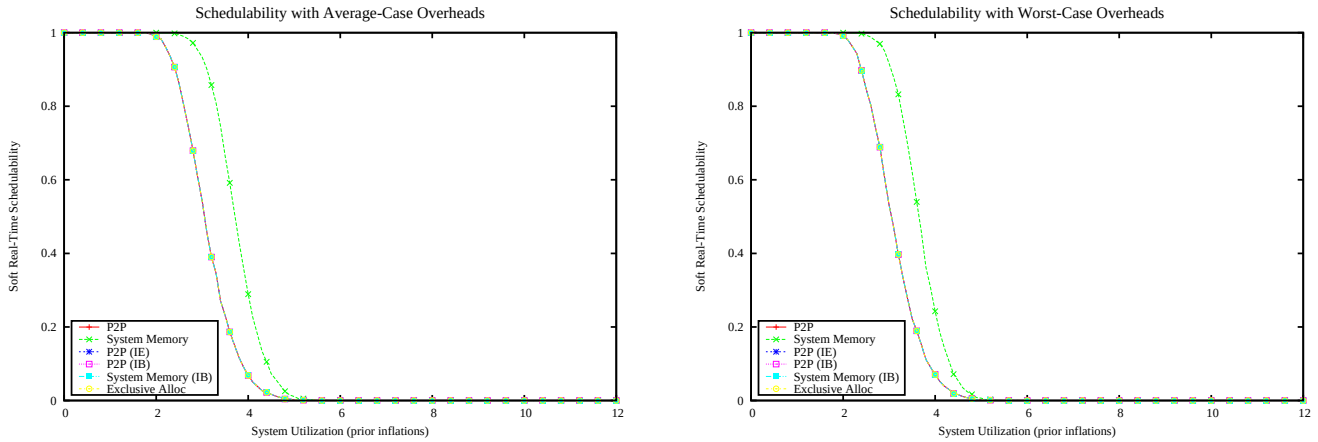

Figure 227: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

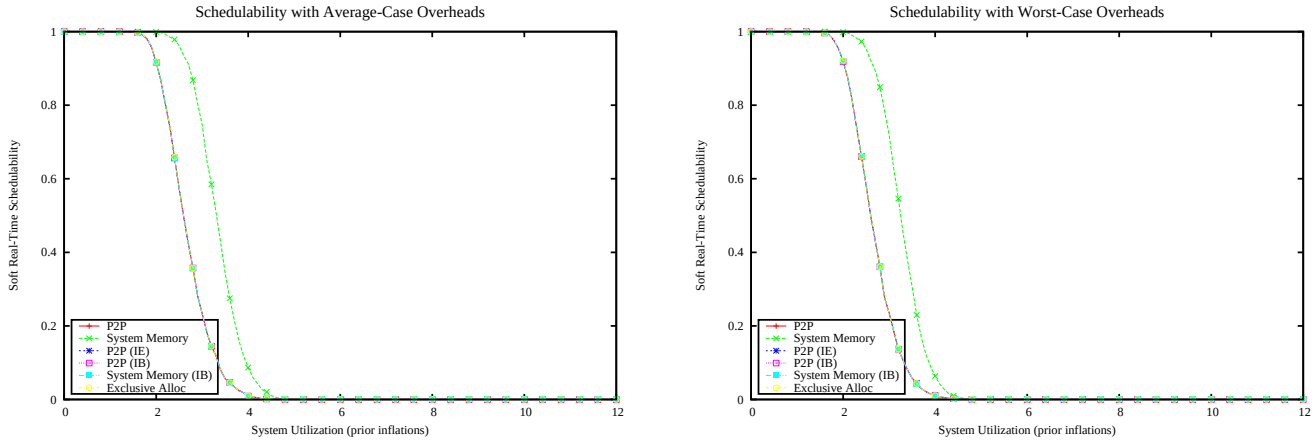

Figure 228: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

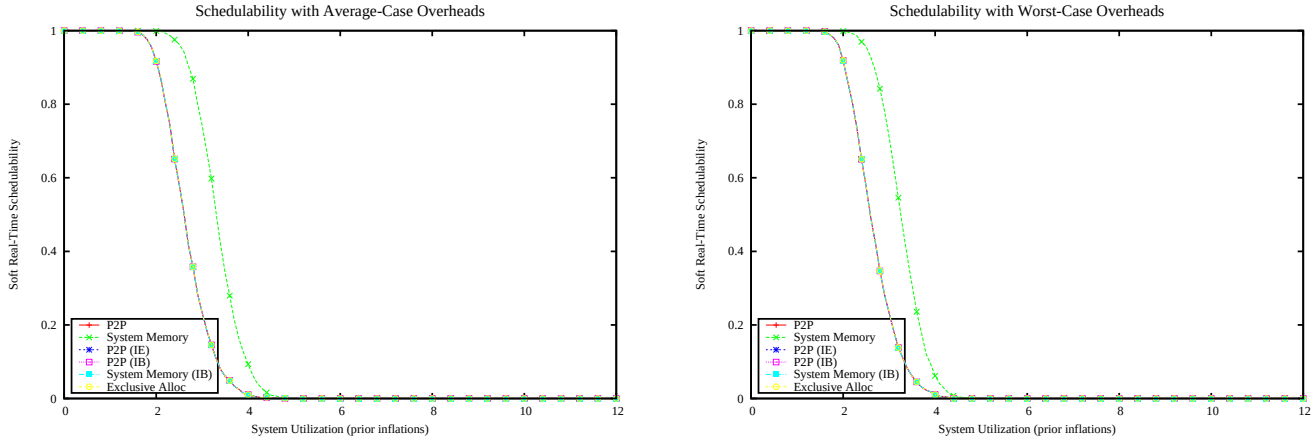

Figure 229: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

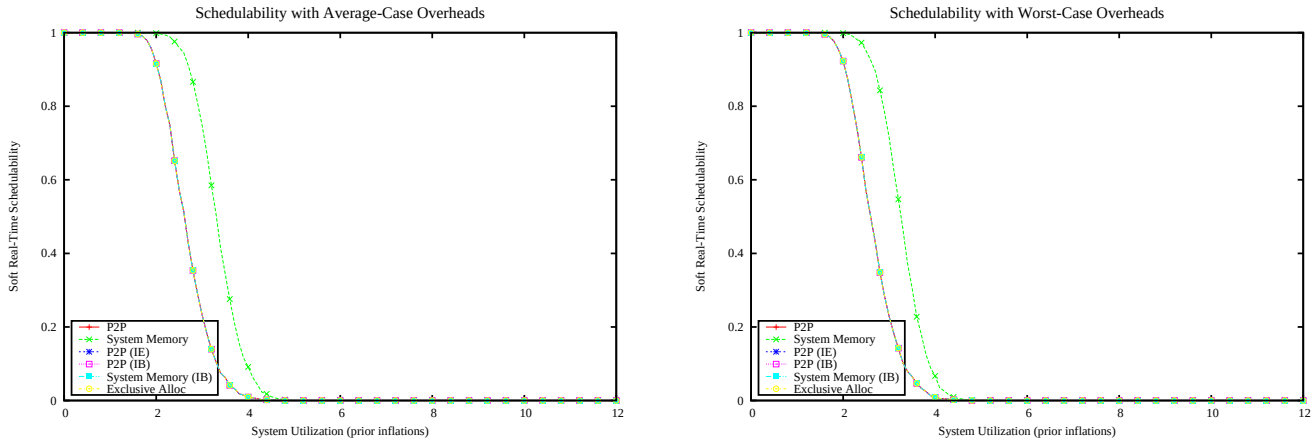

Figure 230: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

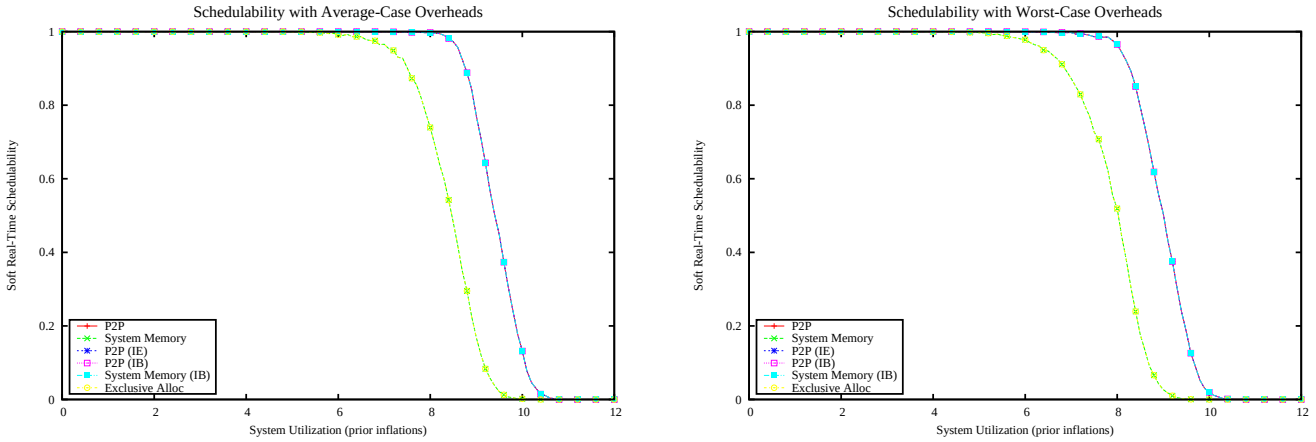

Figure 231: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

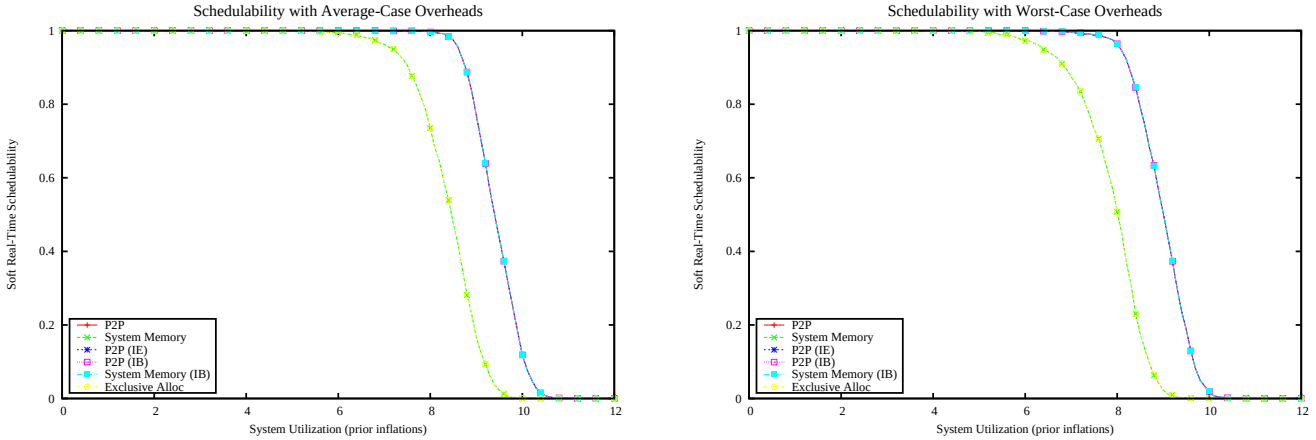

Figure 232: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

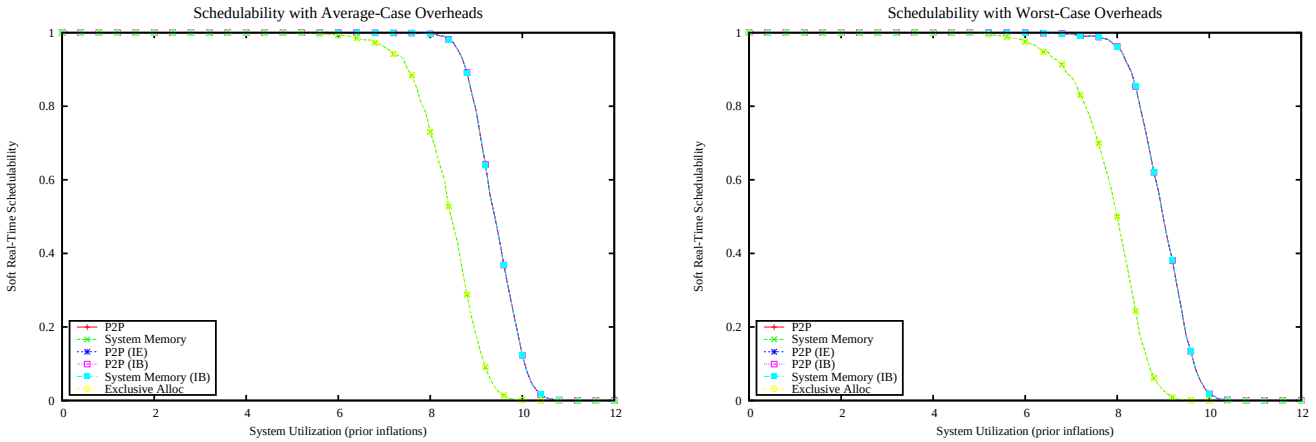

Figure 233: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

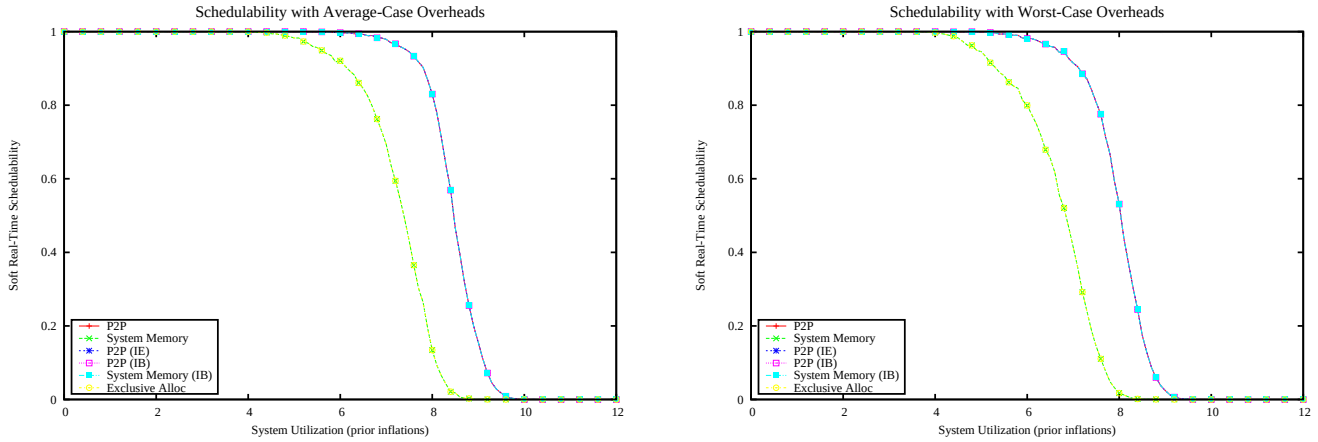

Figure 234: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

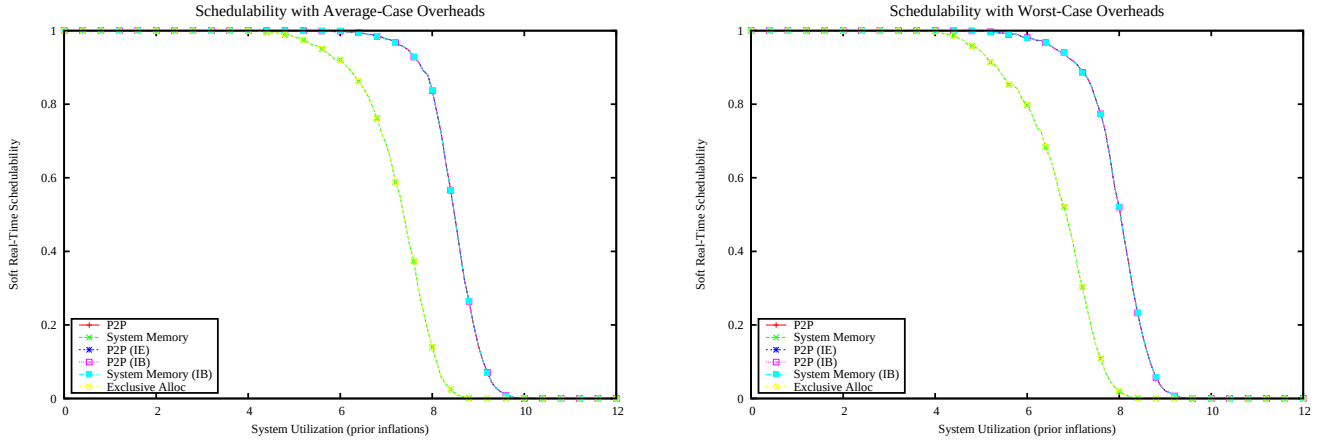

Figure 235: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

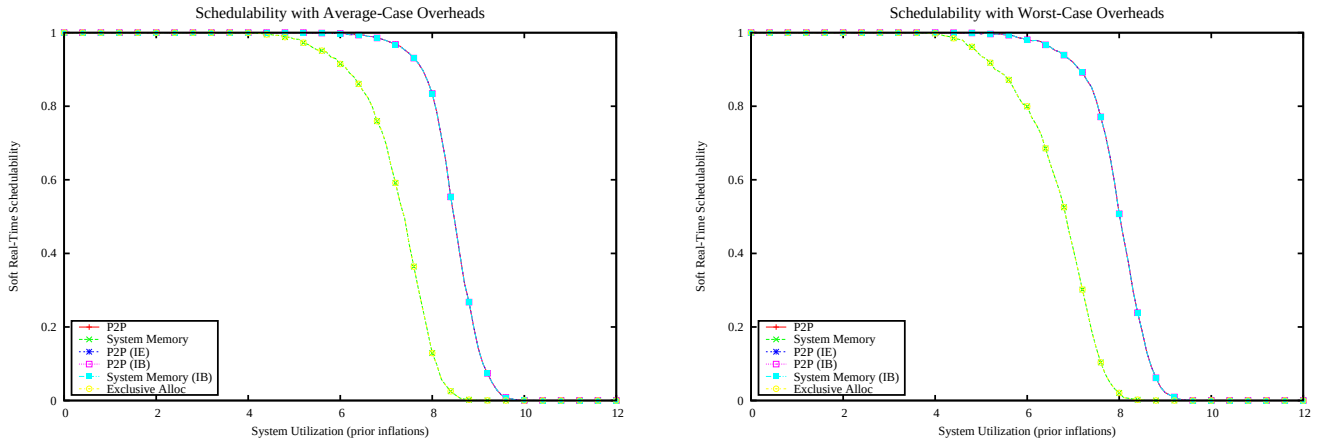

Figure 236: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

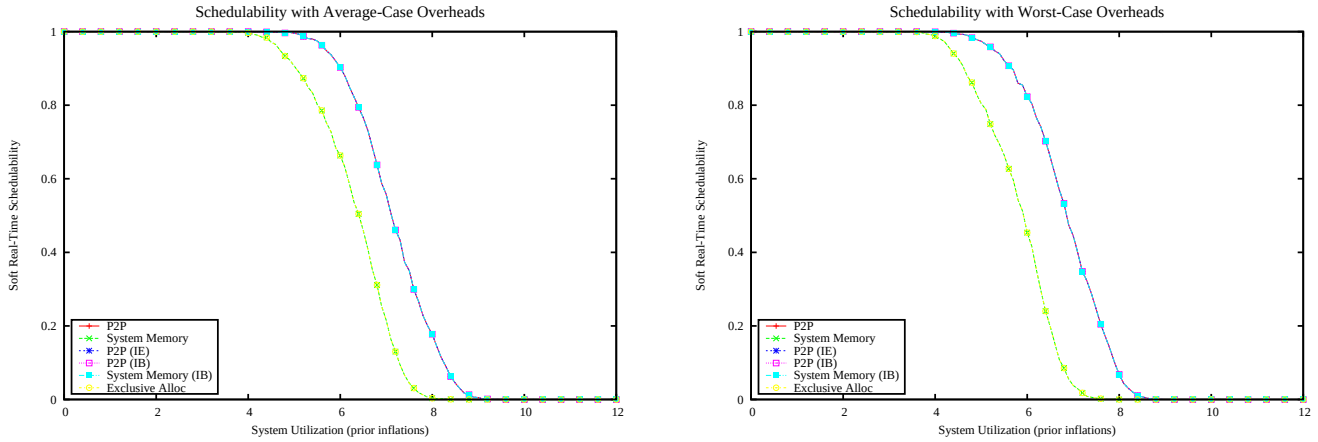

Figure 237: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

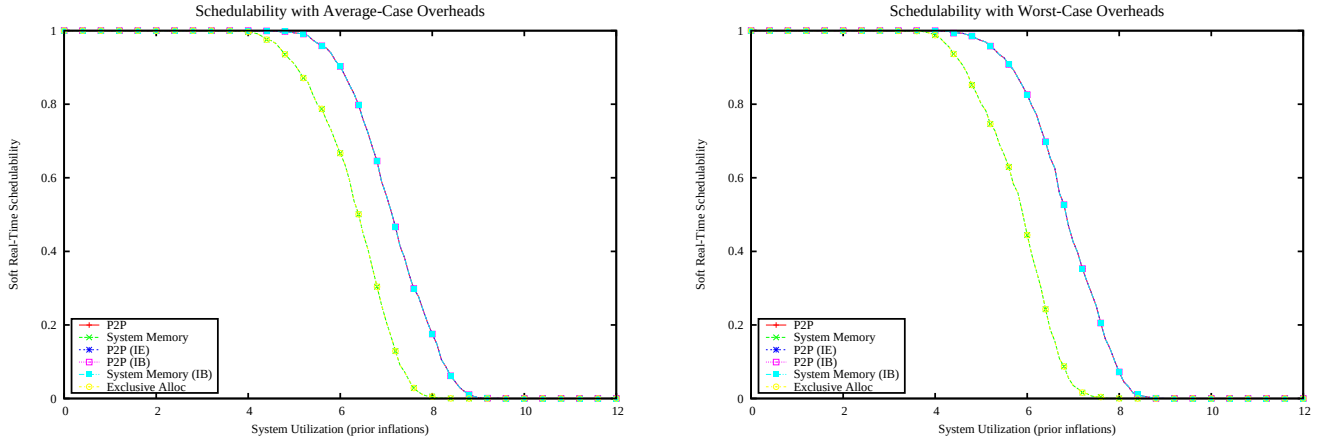

Figure 238: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

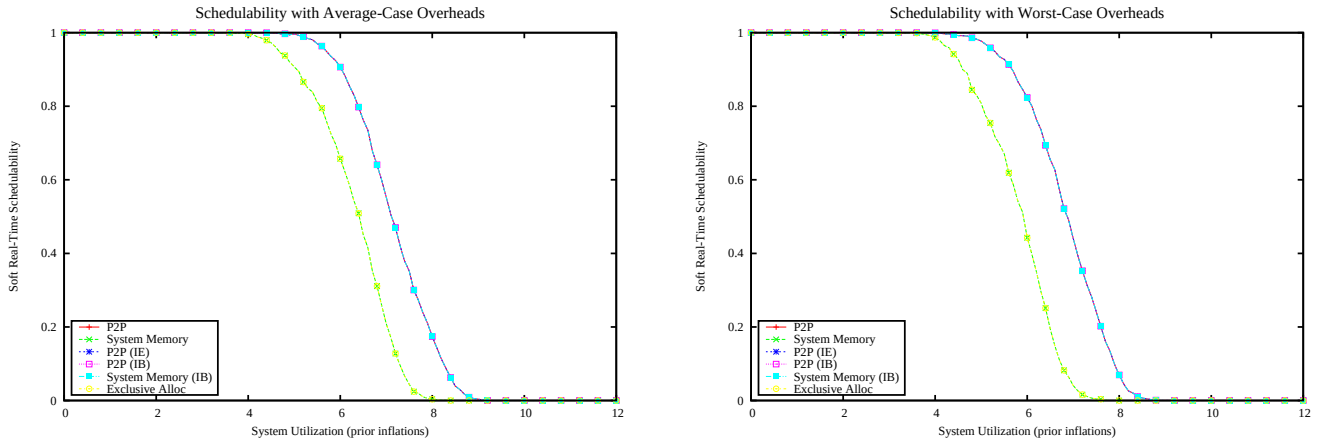

Figure 239: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

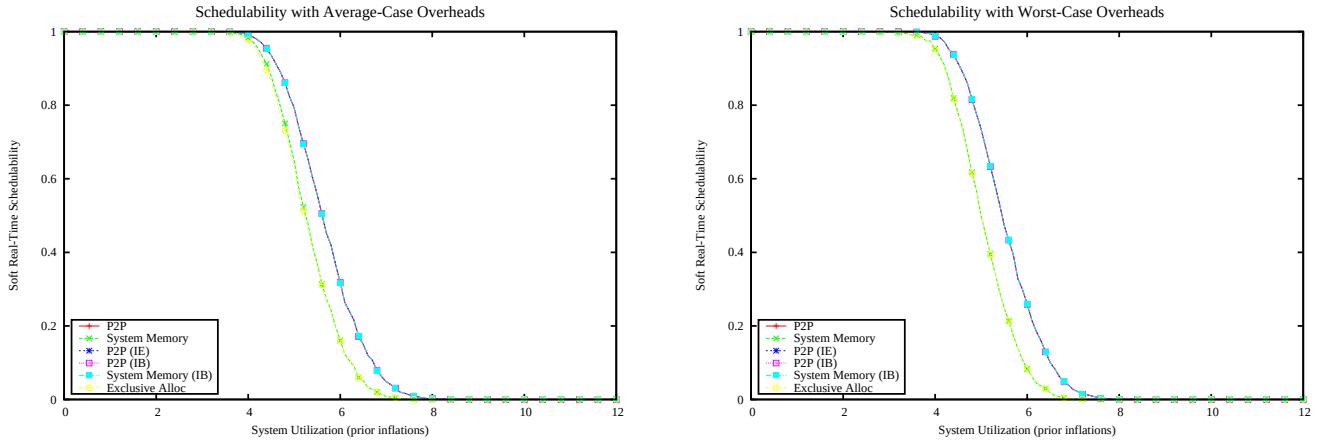

Figure 240: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

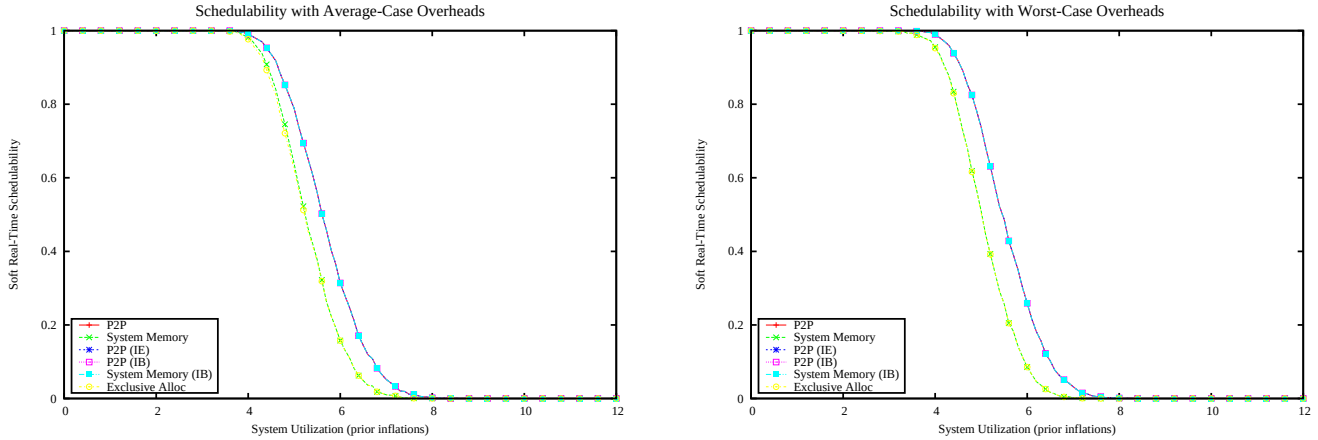

Figure 241: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

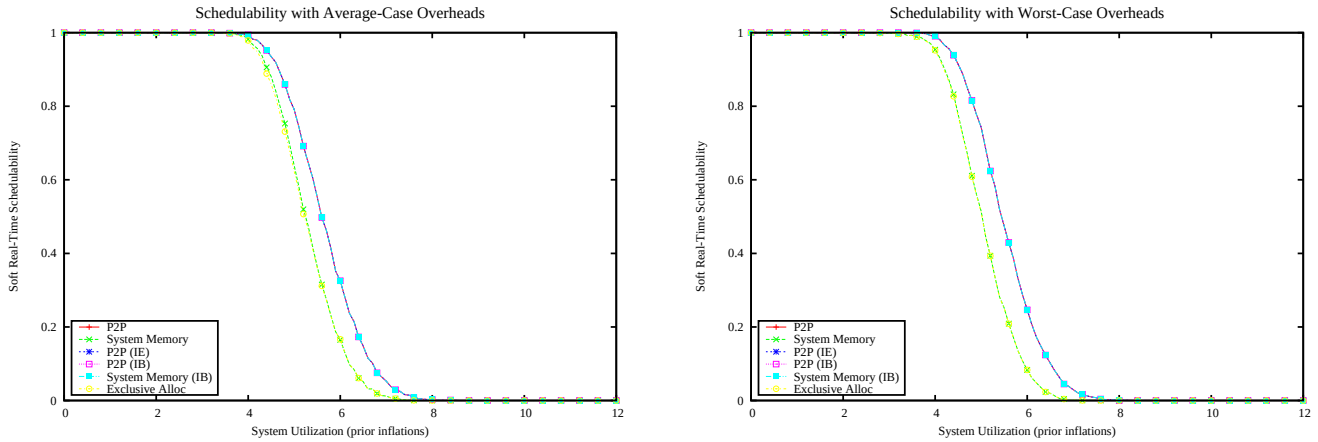

Figure 242: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

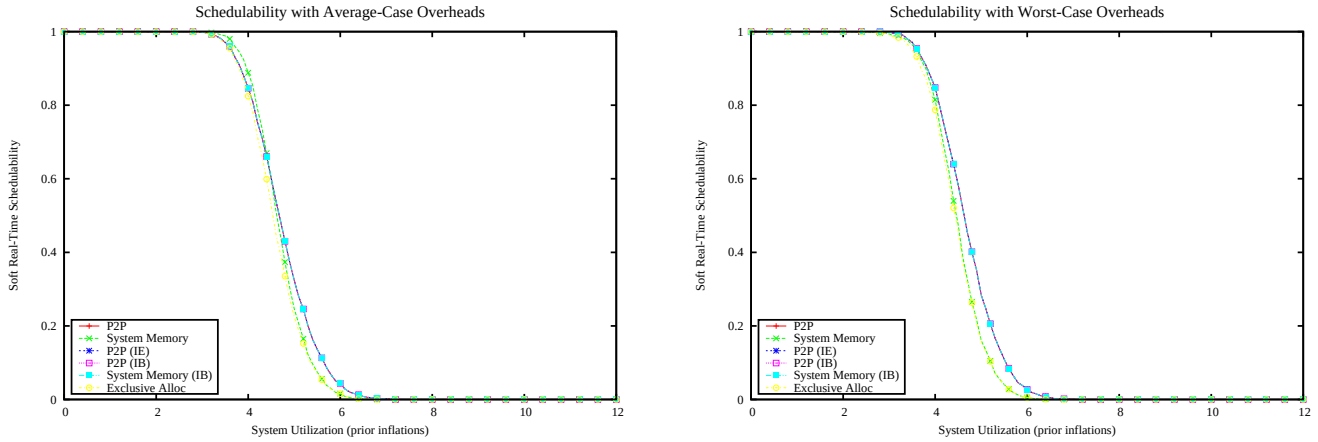

Figure 243: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

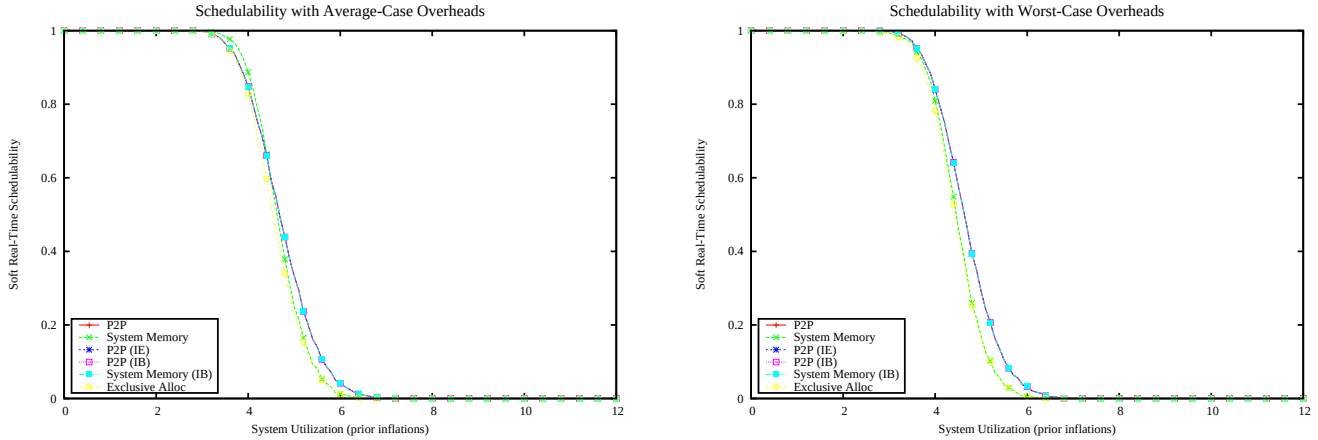

Figure 244: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

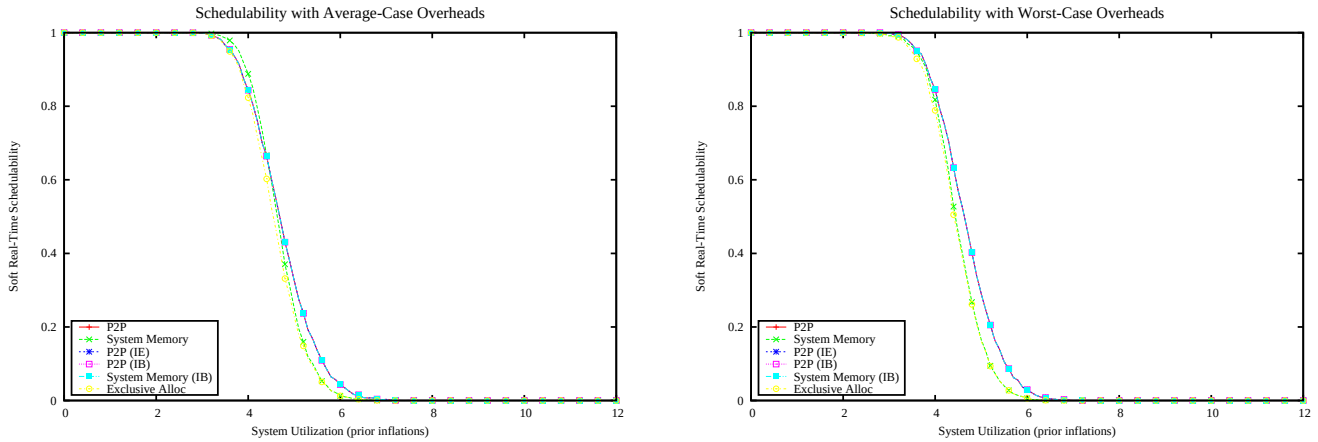

Figure 245: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

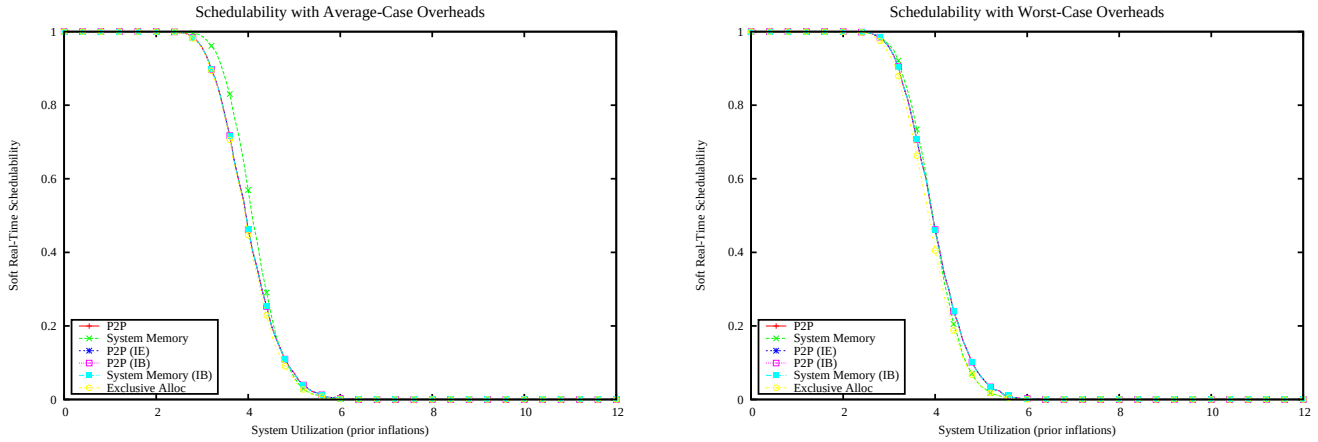

Figure 246: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

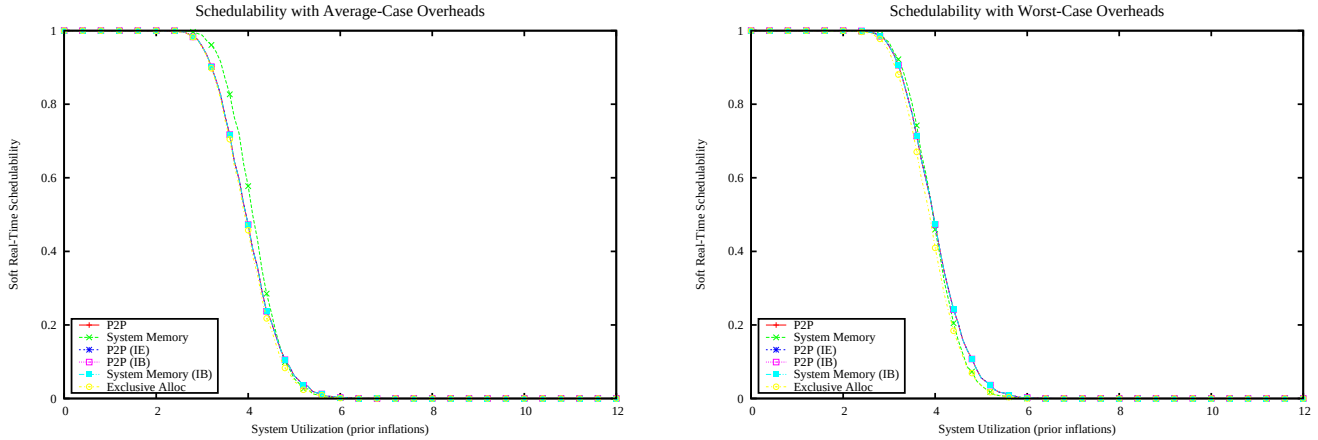

Figure 247: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

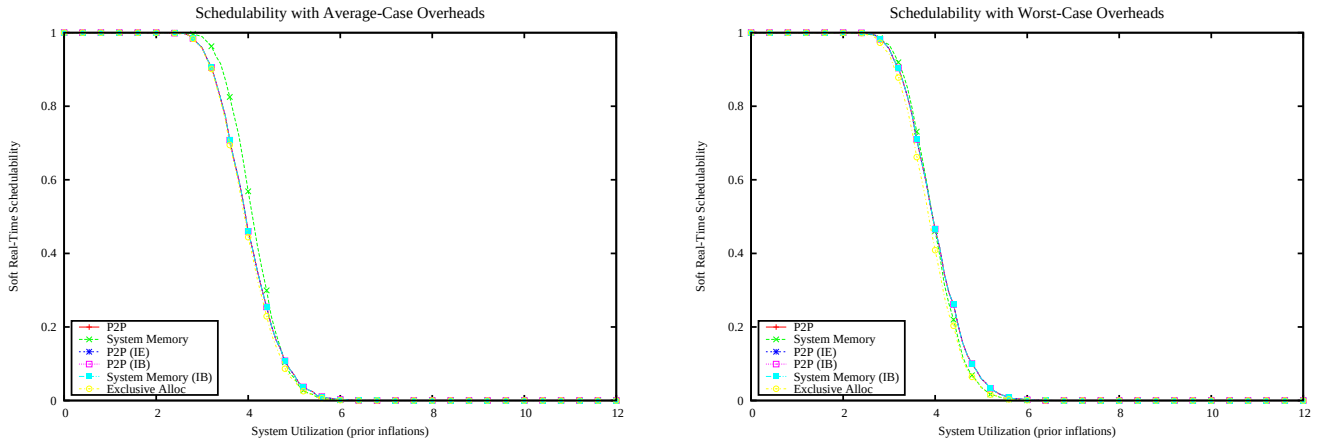

Figure 248: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

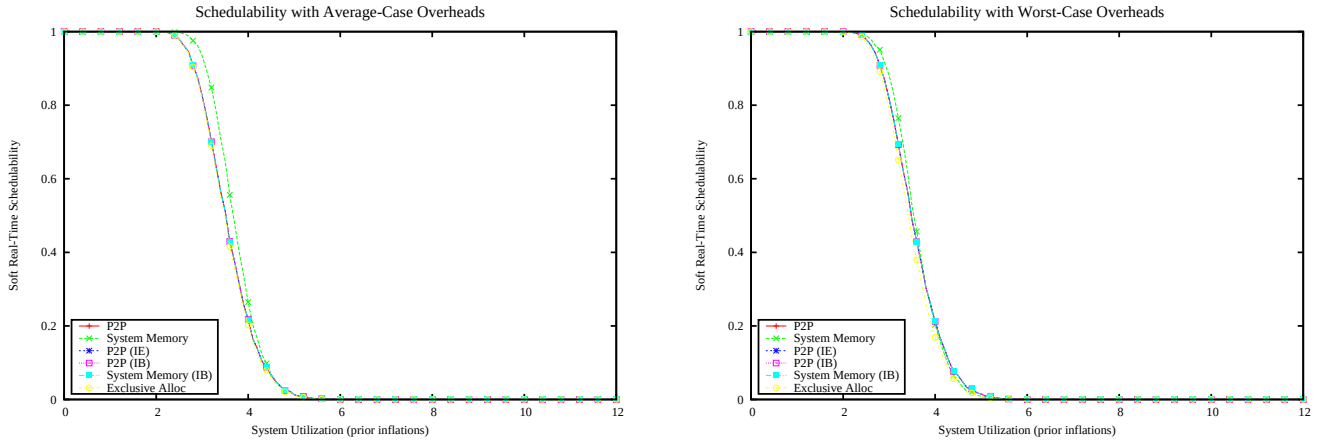

Figure 249: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

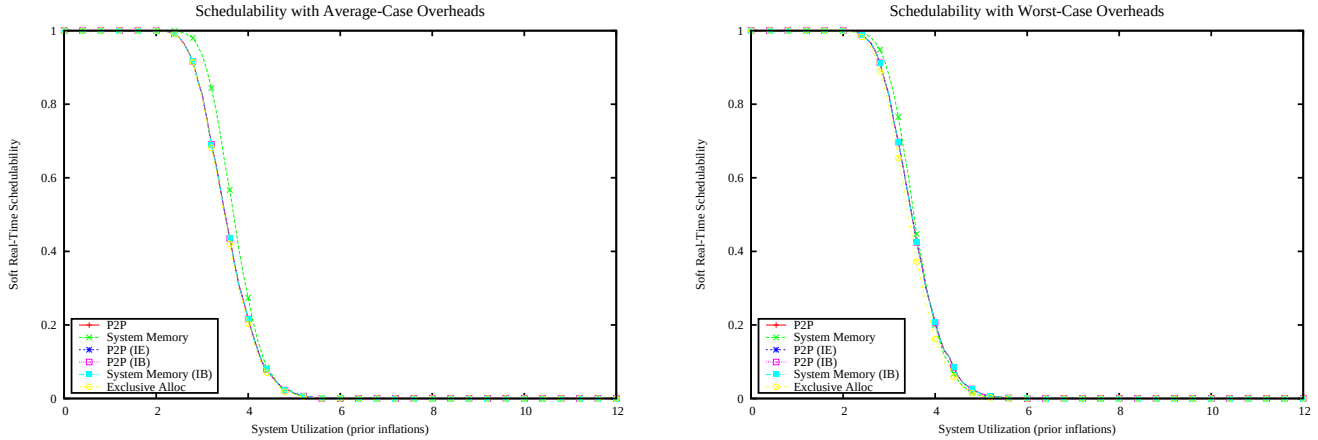

Figure 250: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

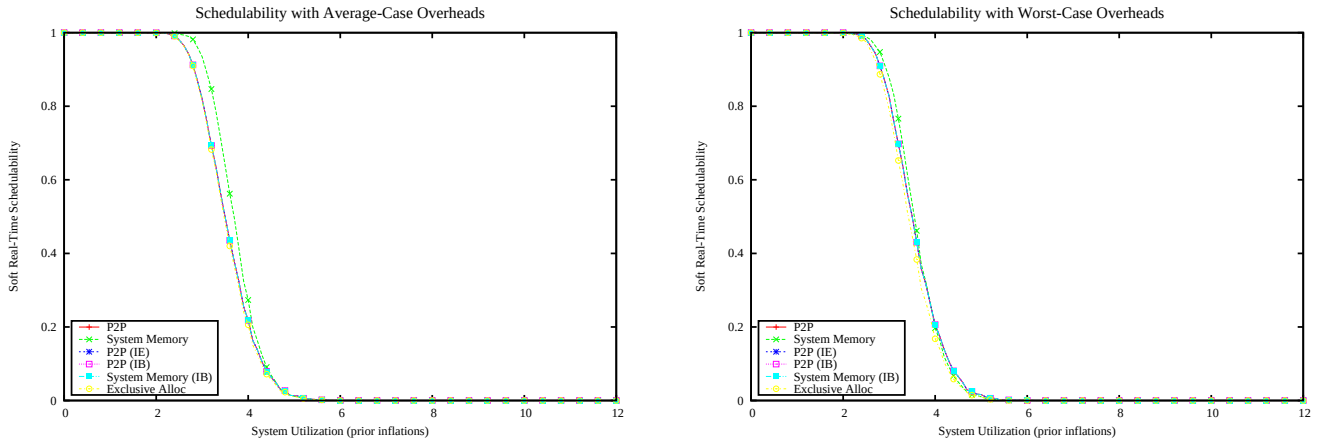

Figure 251: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

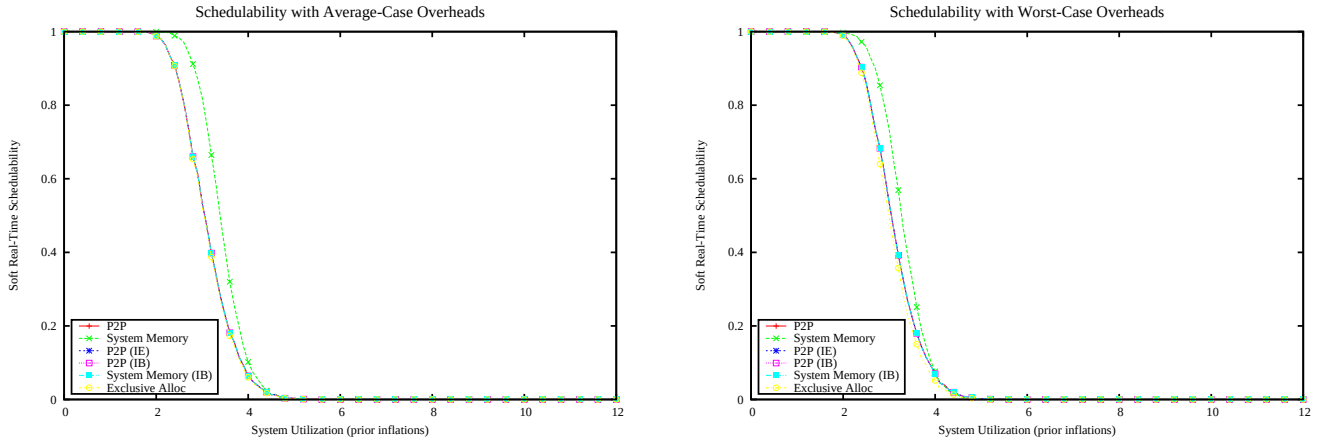

Figure 252: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

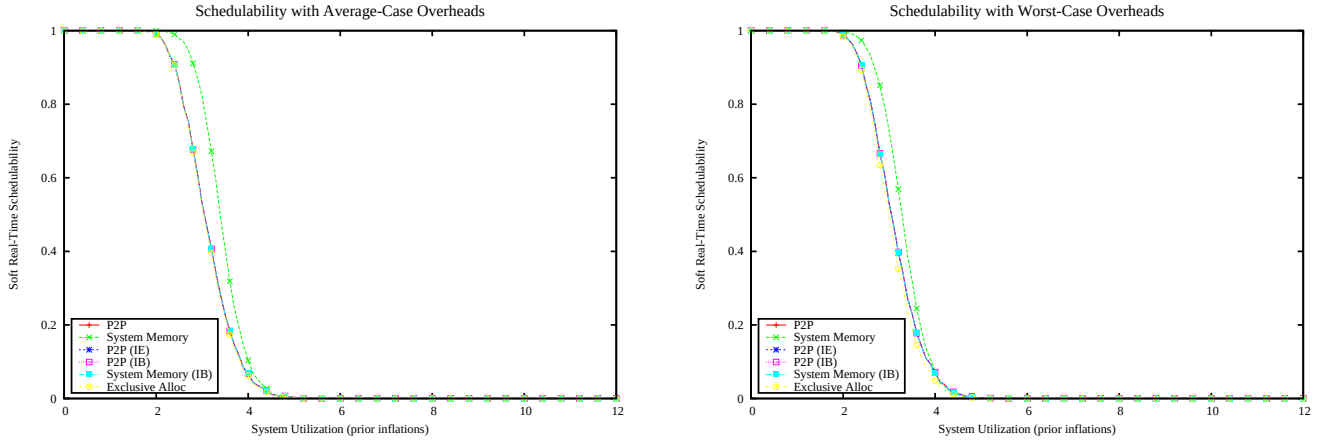

Figure 253: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

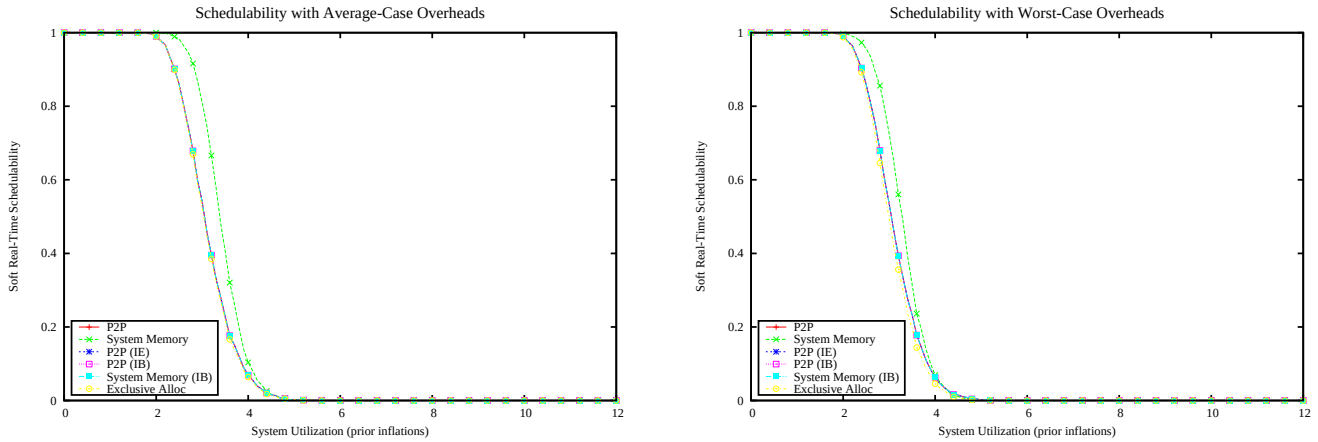

Figure 254: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

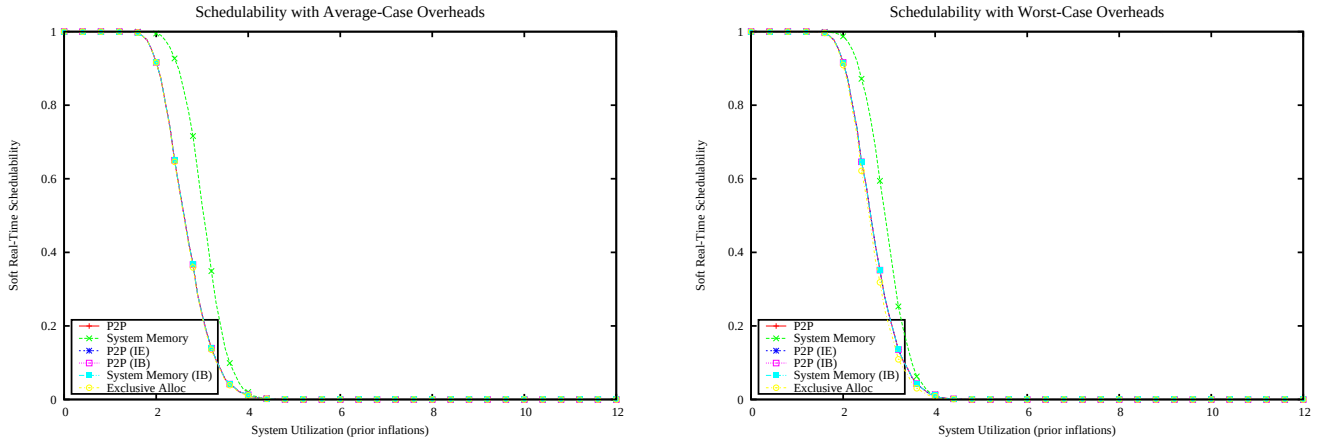

Figure 255: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

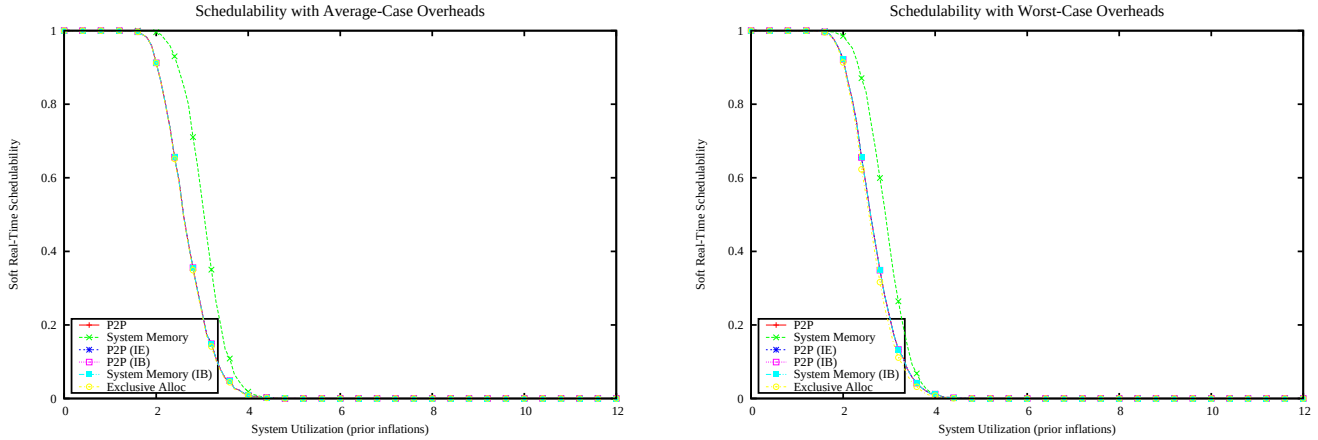

Figure 256: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

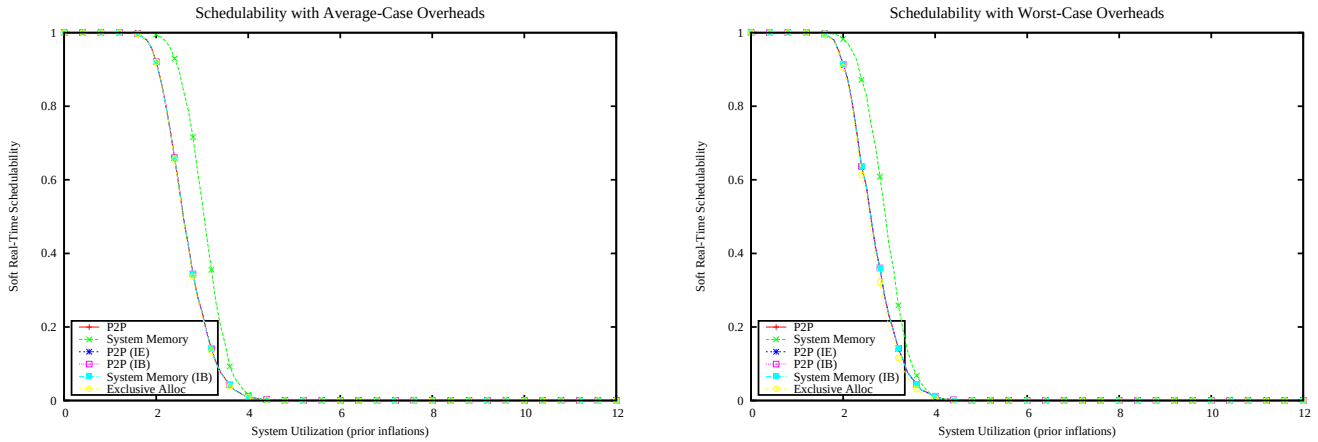

Figure 257: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

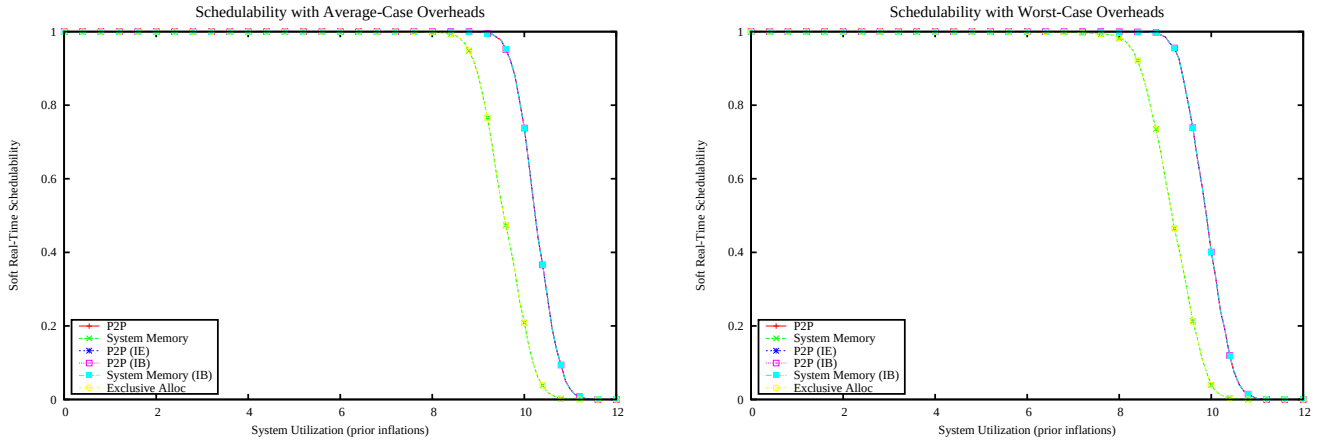

Figure 258: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

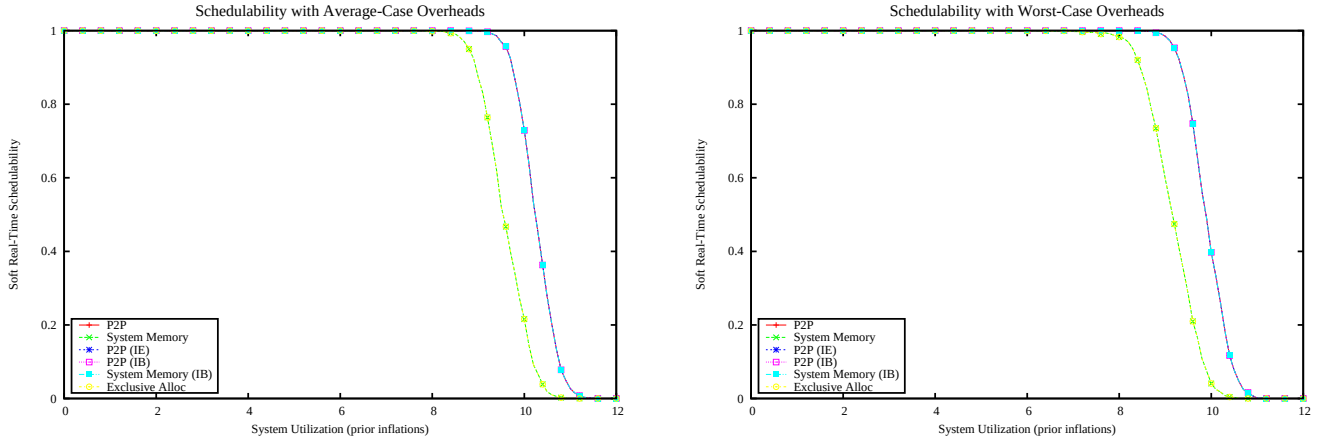

Figure 259: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

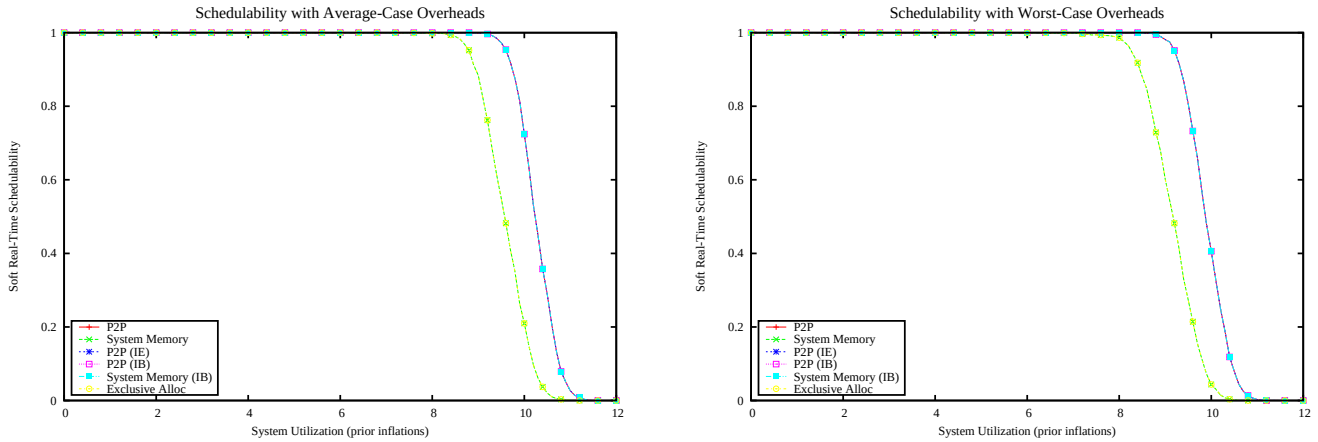

Figure 260: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

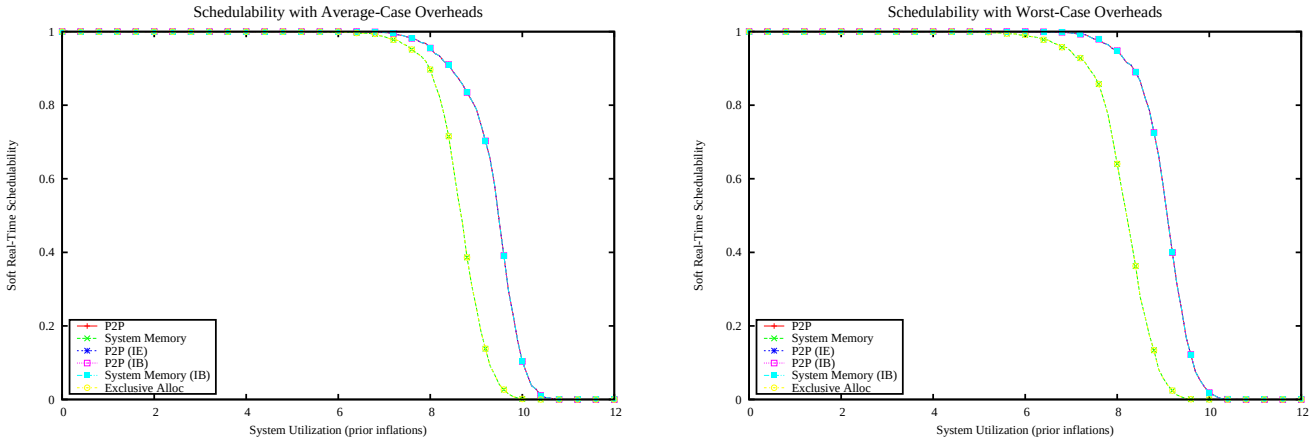

Figure 261: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

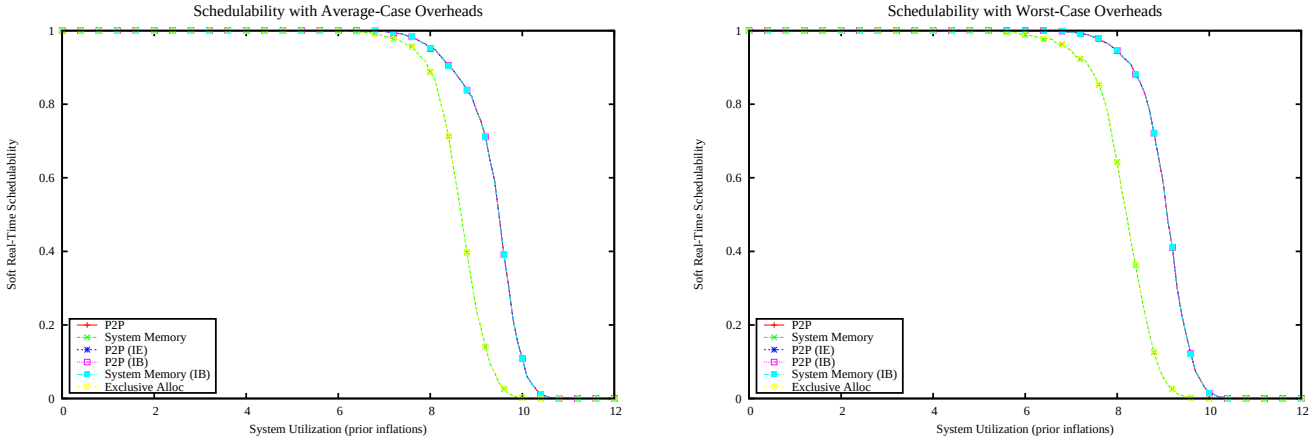

Figure 262: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

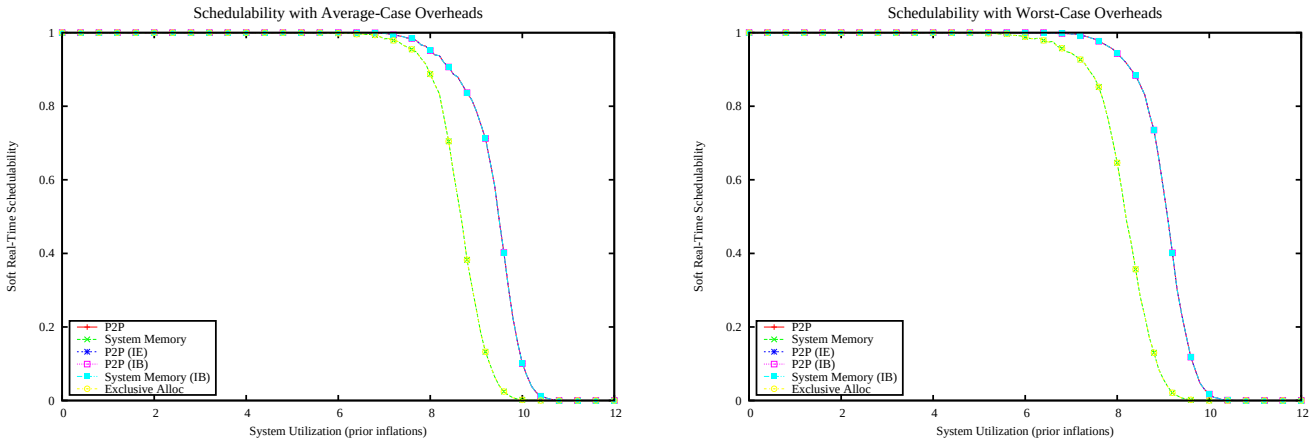

Figure 263: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

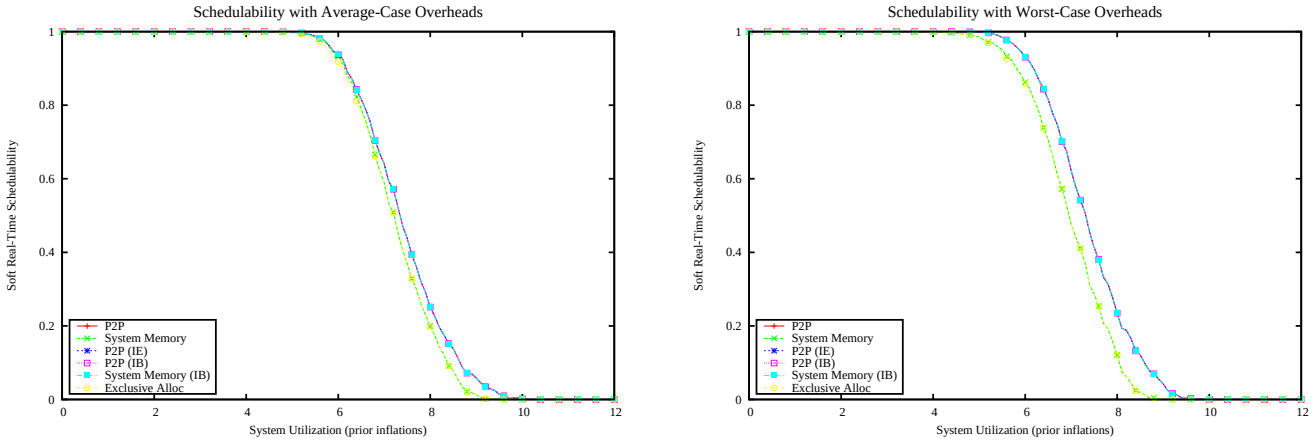

Figure 264: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

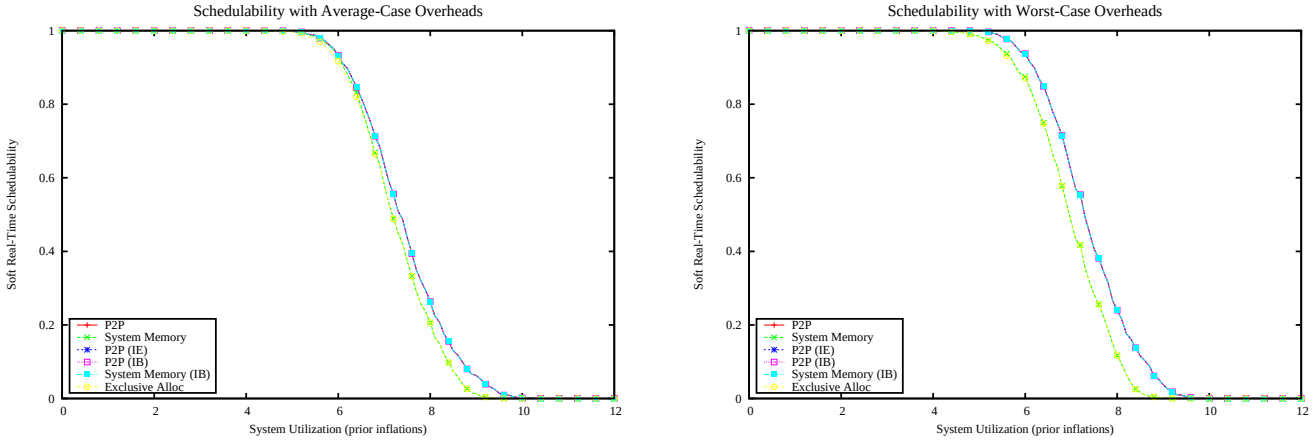

Figure 265: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

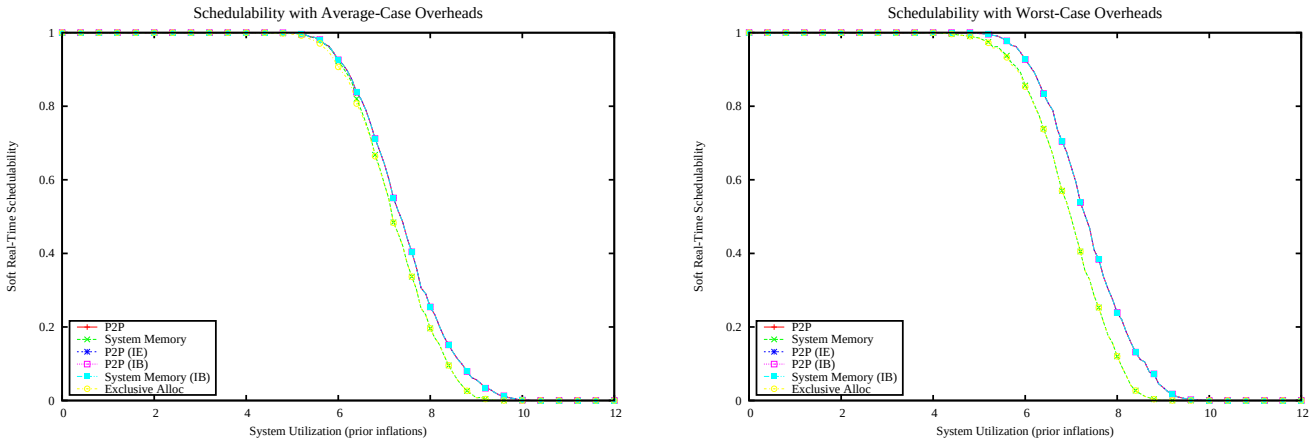

Figure 266: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

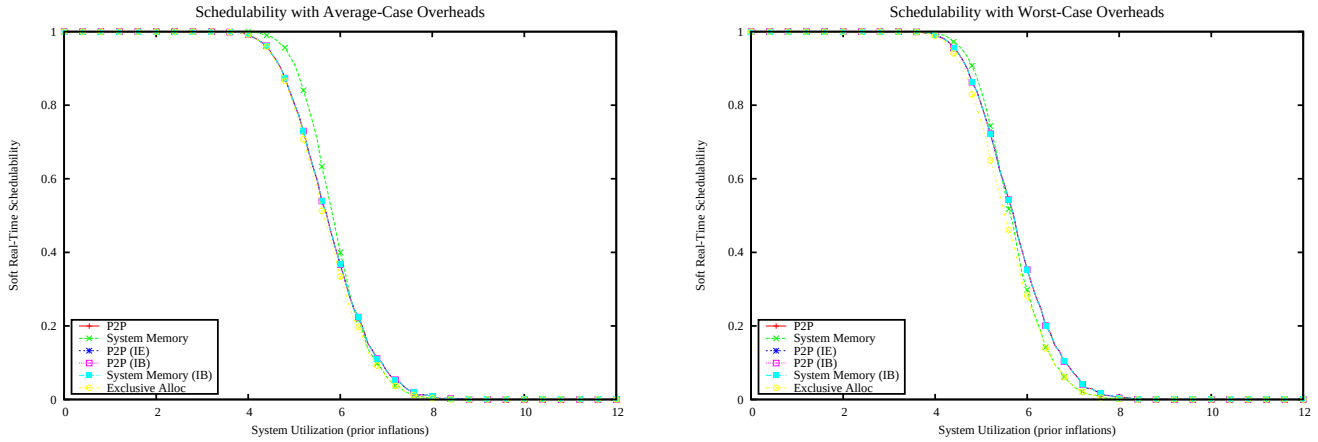

Figure 267: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

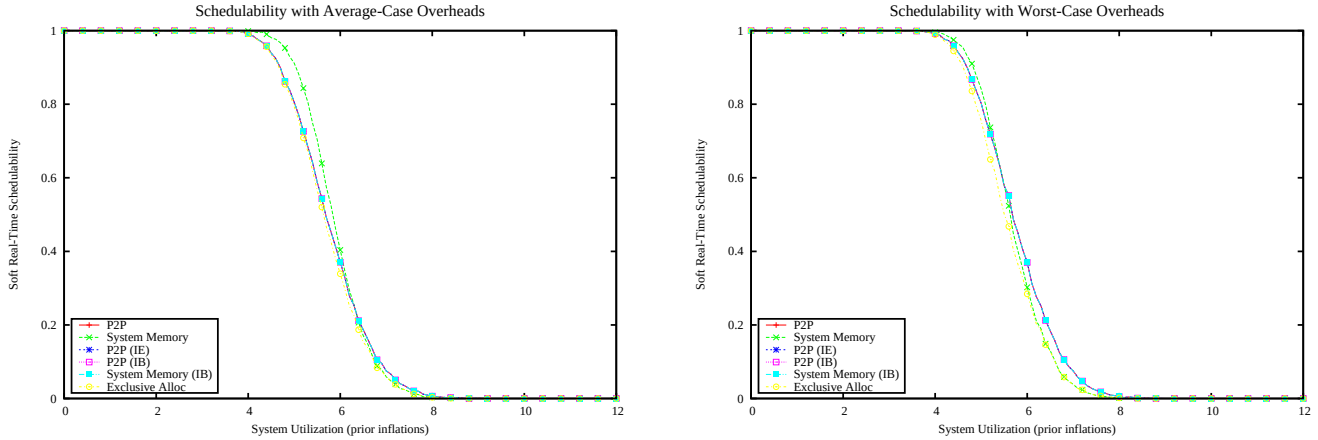

Figure 268: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

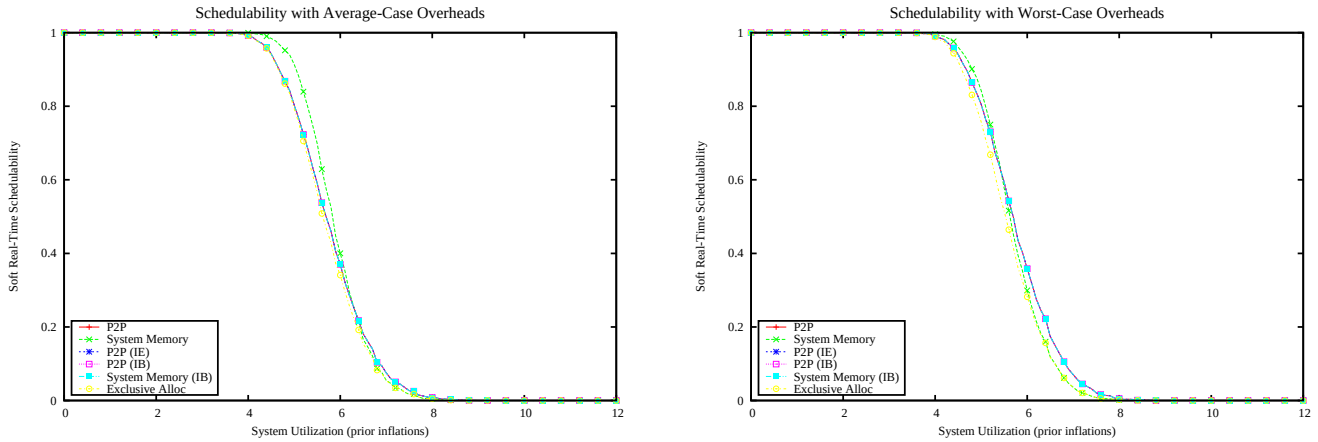

Figure 269: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

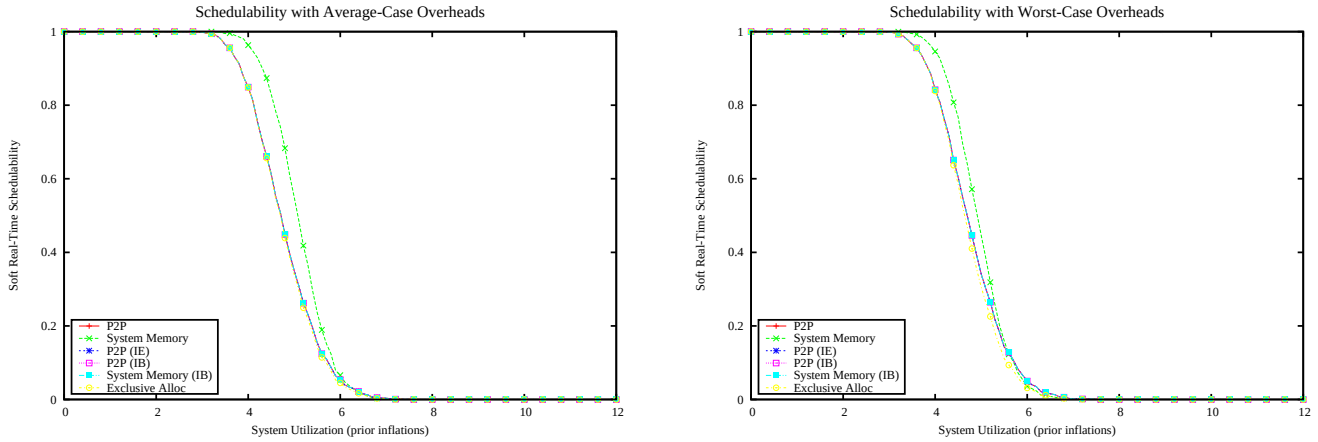

Figure 270: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

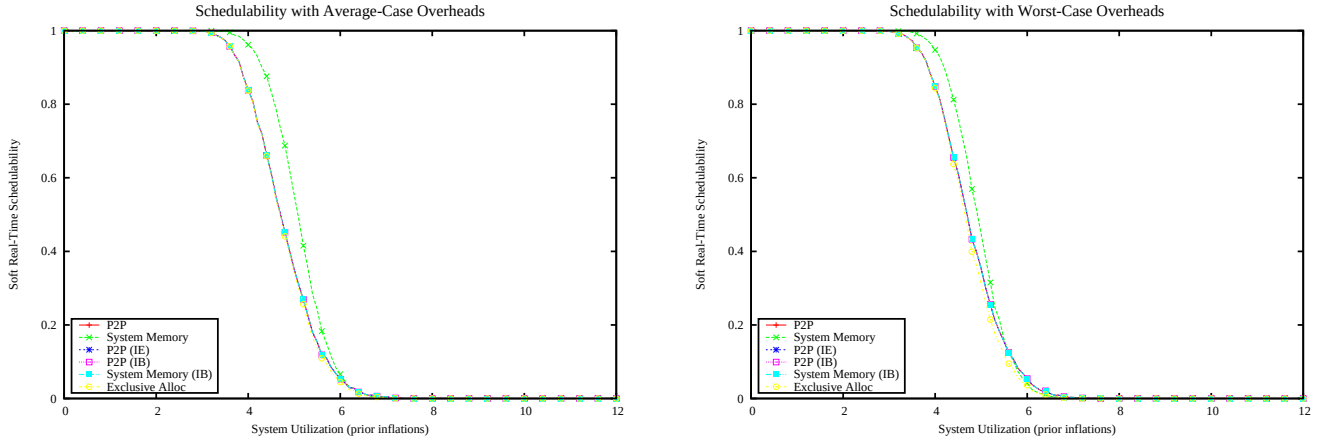

Figure 271: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

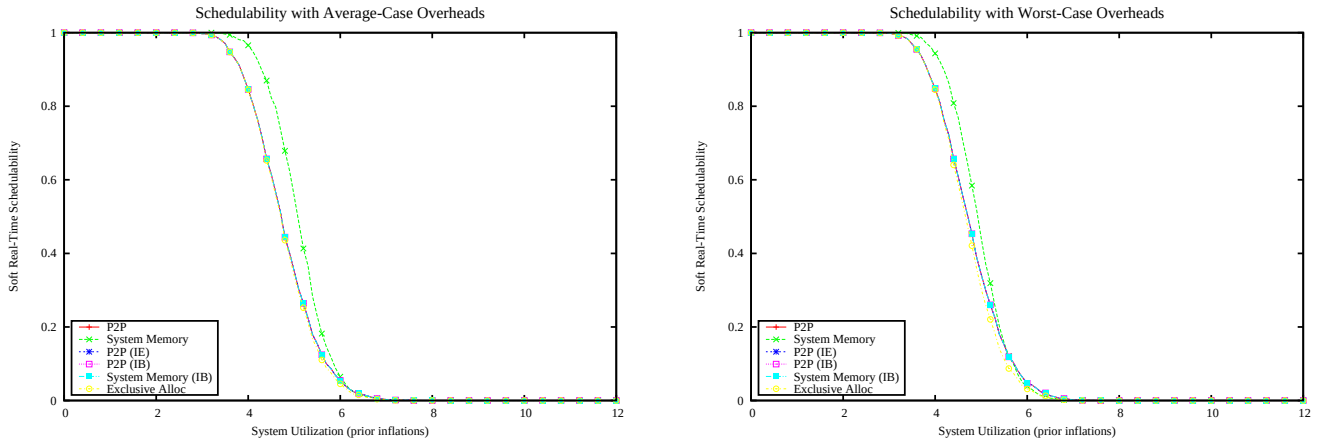

Figure 272: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

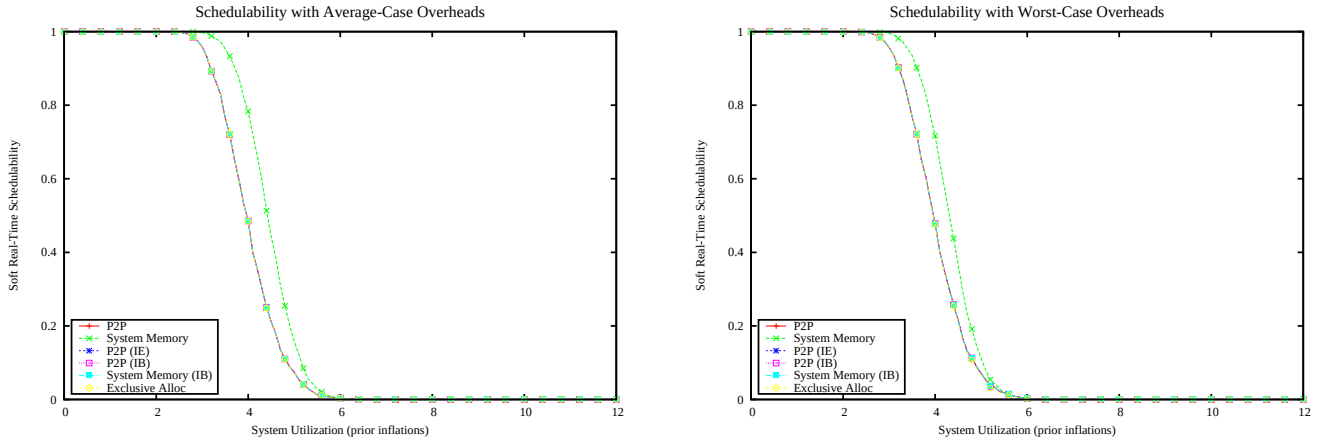

Figure 273: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

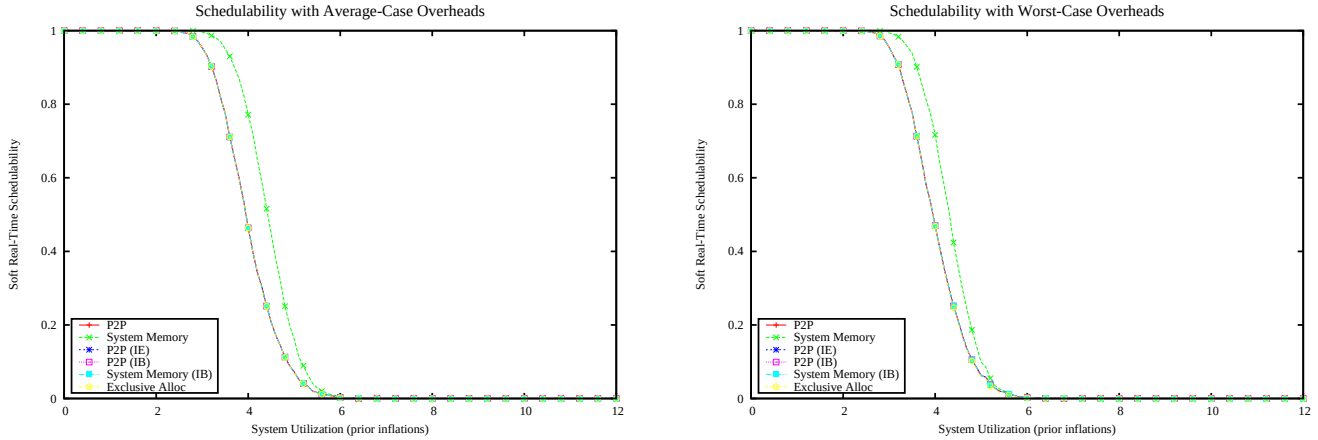

Figure 274: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

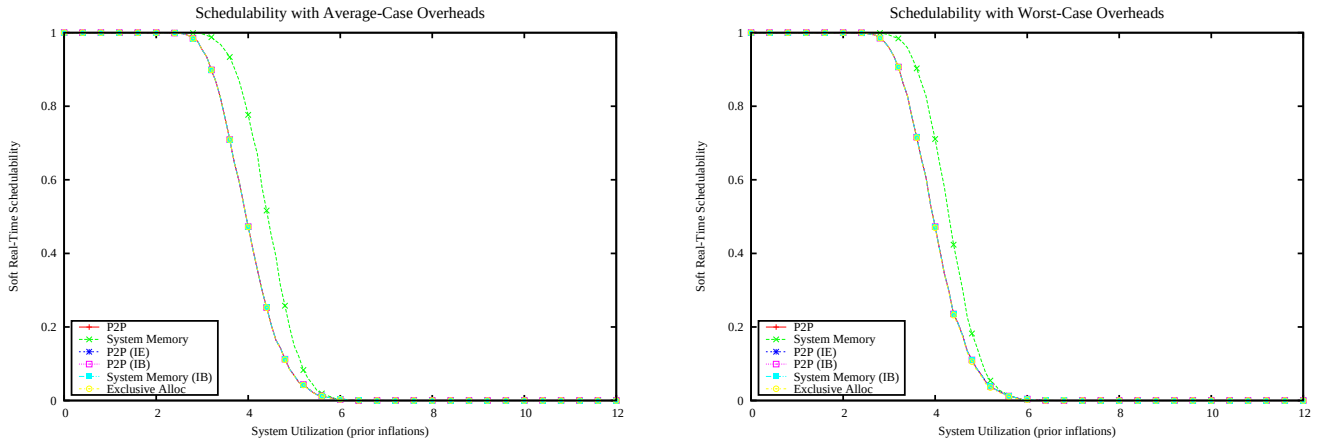

Figure 275: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

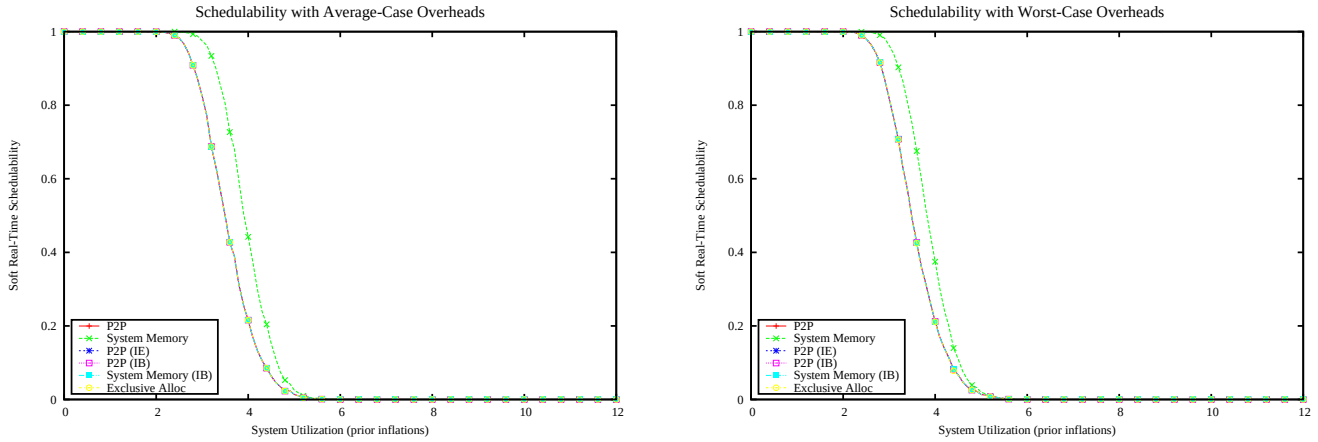

Figure 276: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

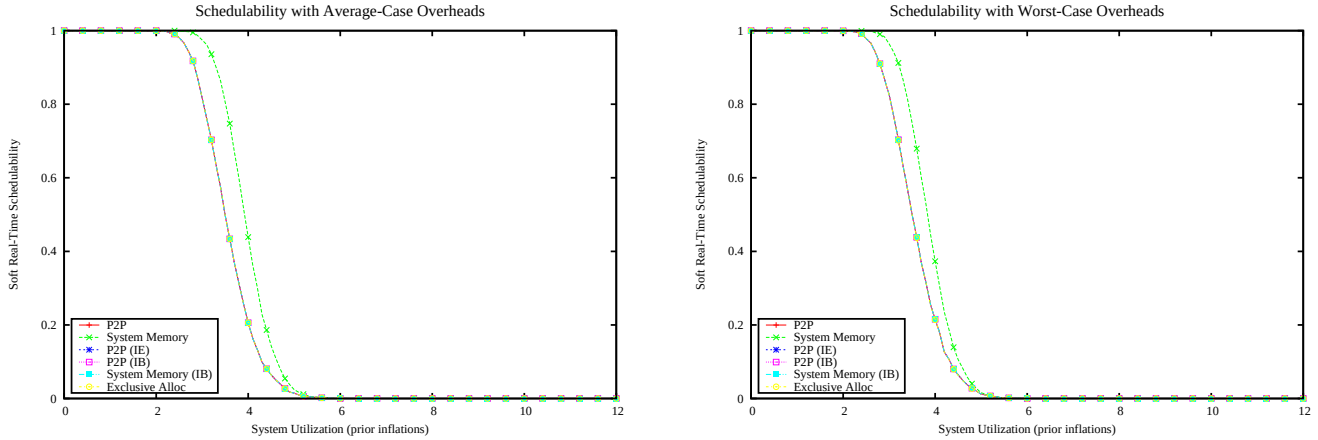

Figure 277: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

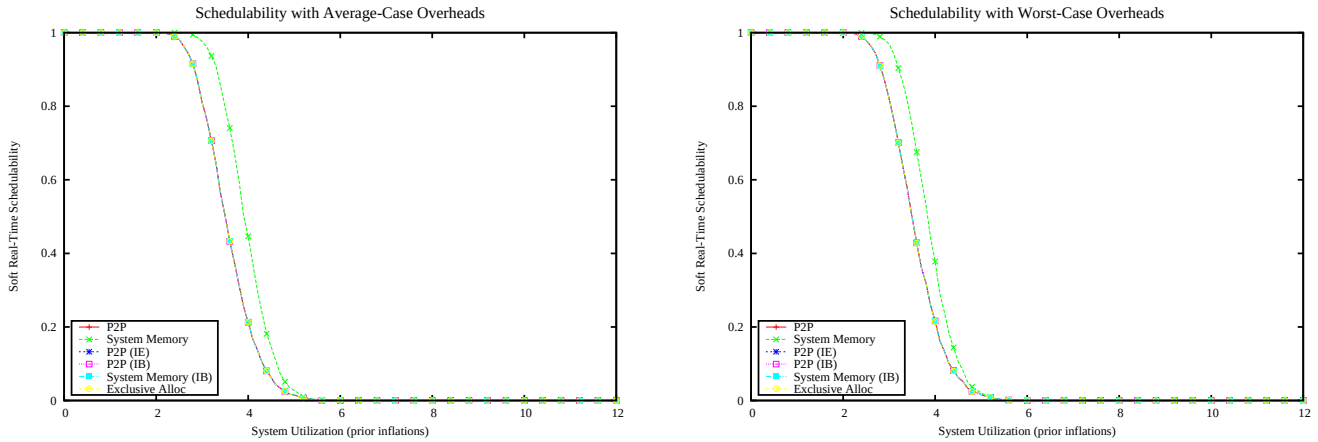

Figure 278: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

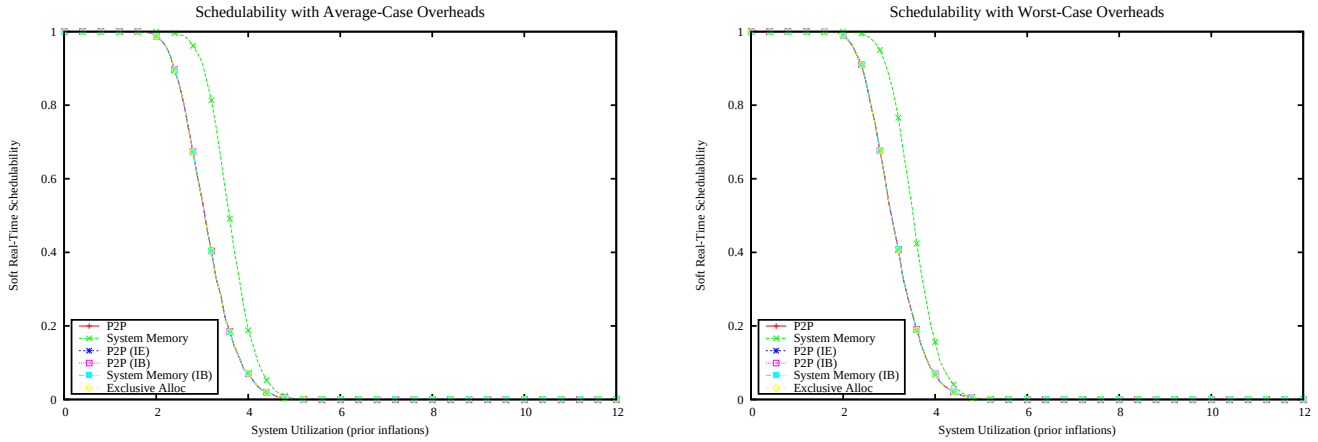

Figure 279: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

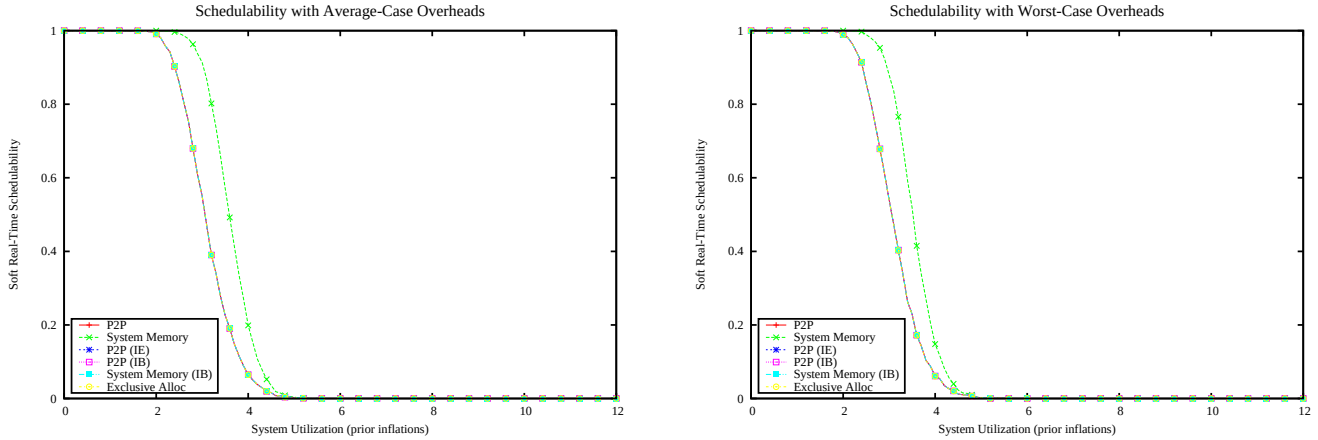

Figure 280: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

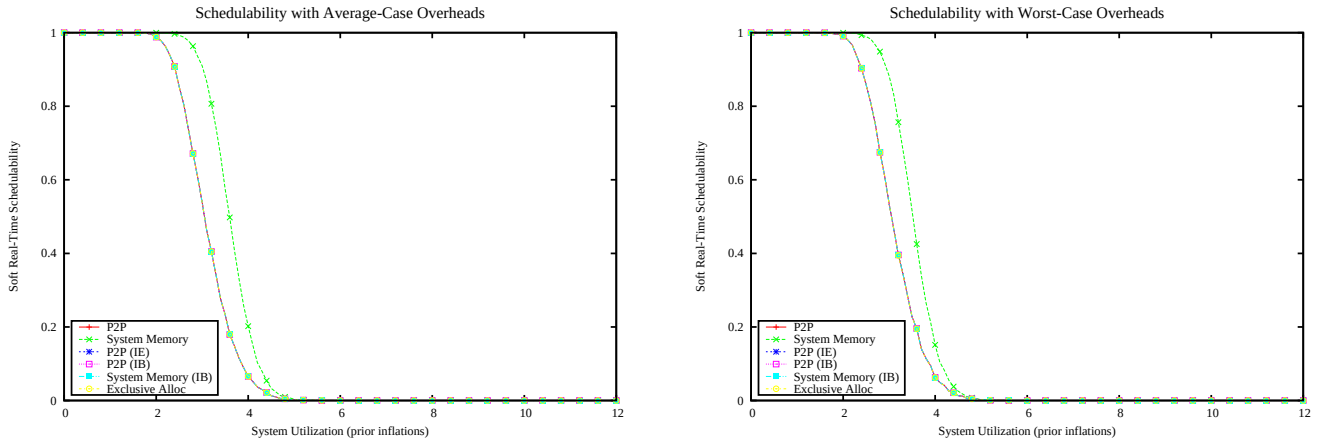

Figure 281: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

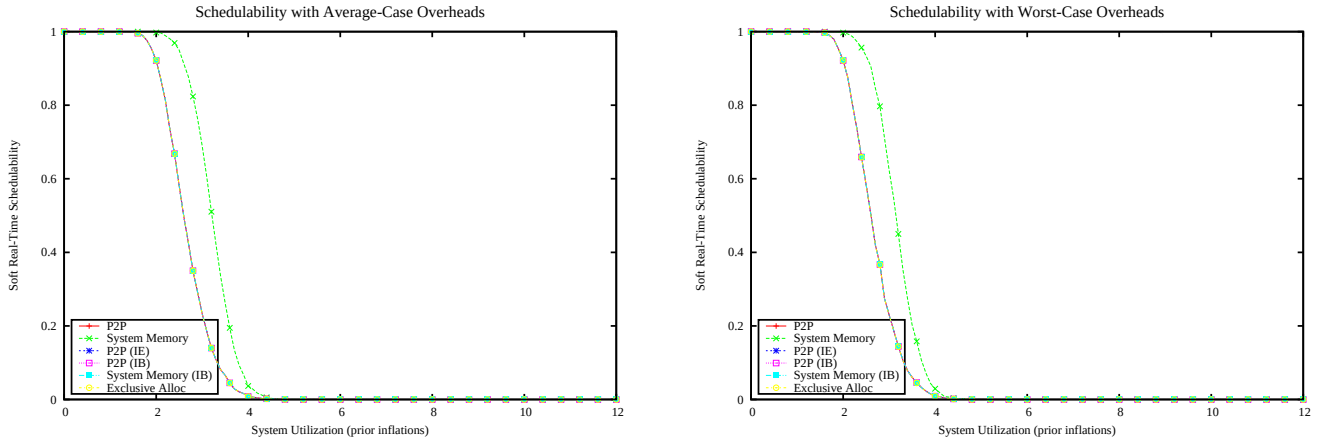

Figure 282: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

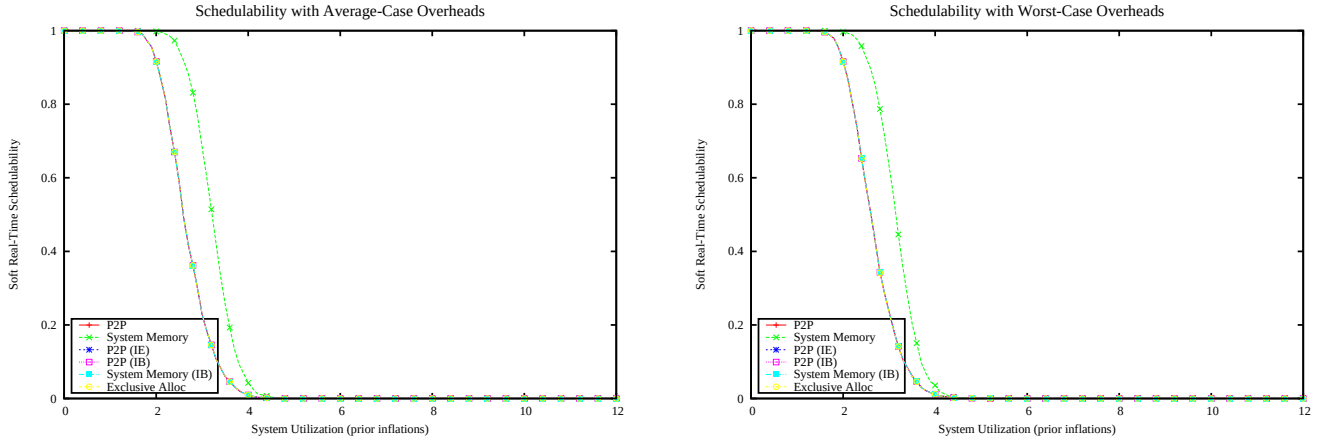

Figure 283: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

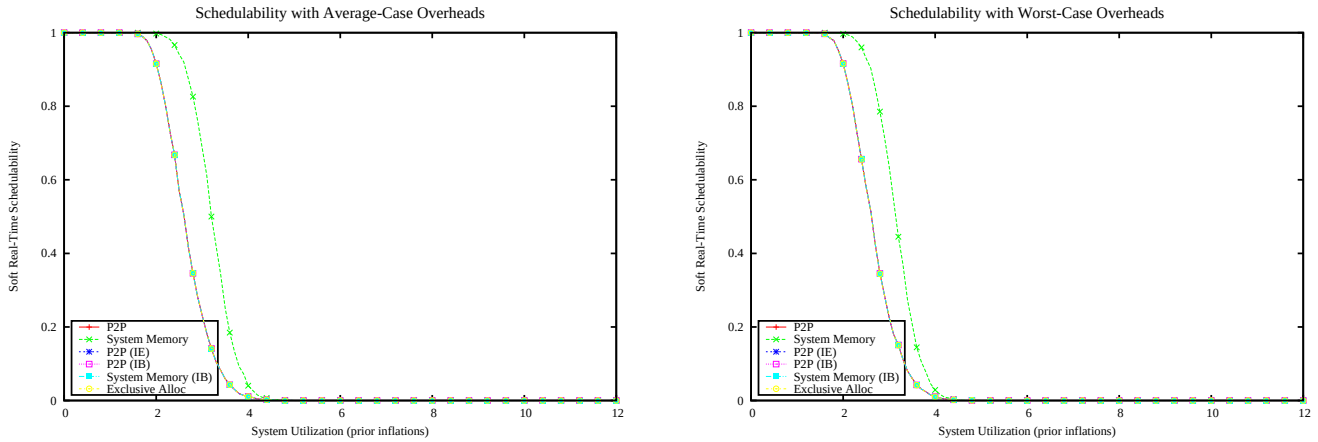

Figure 284: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

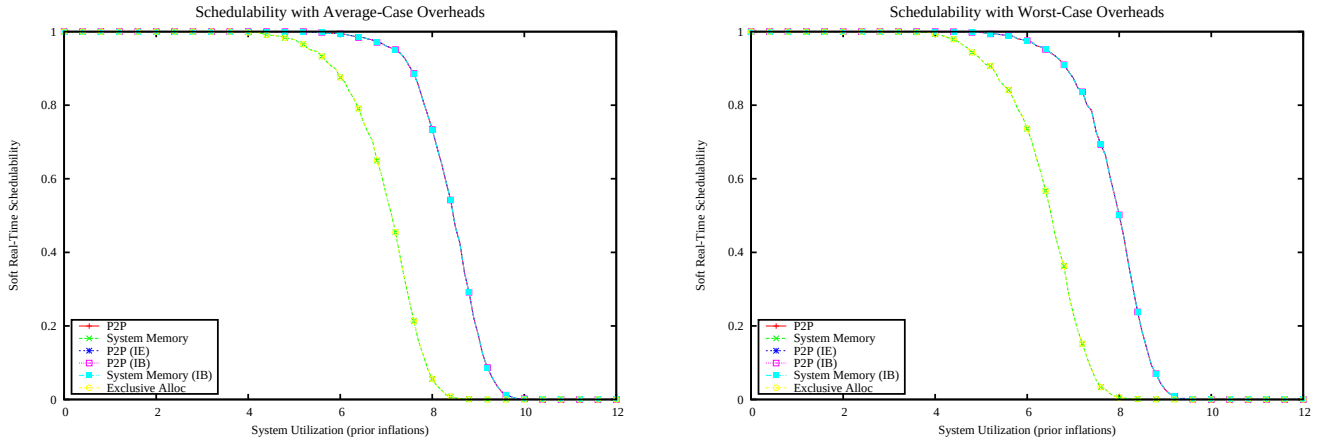

Figure 285: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

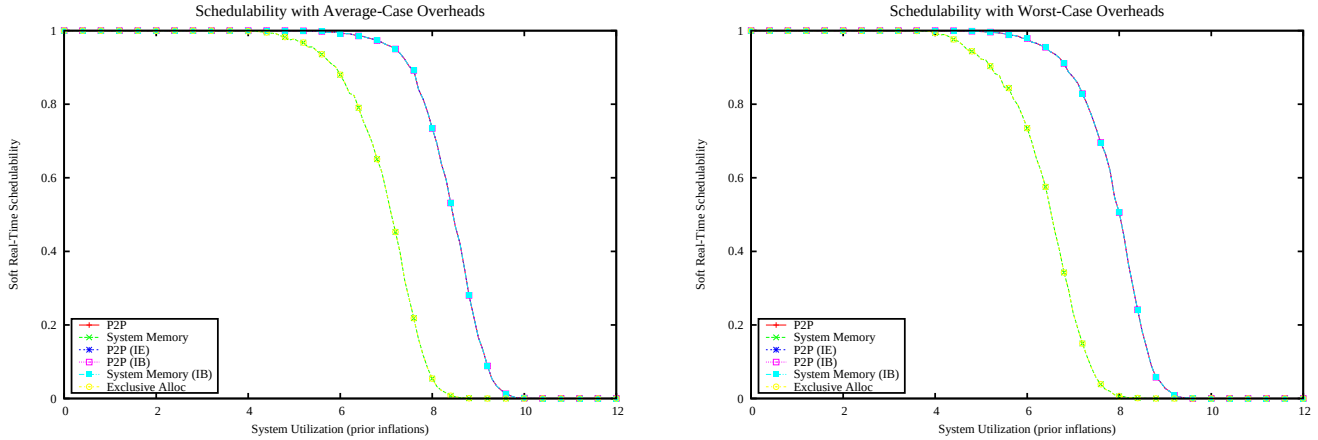

Figure 286: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

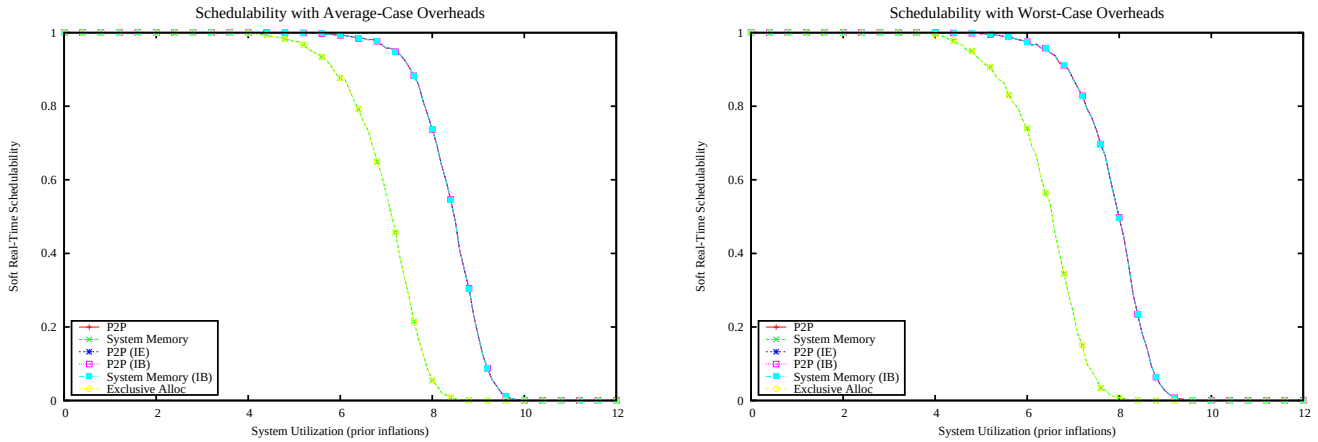

Figure 287: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

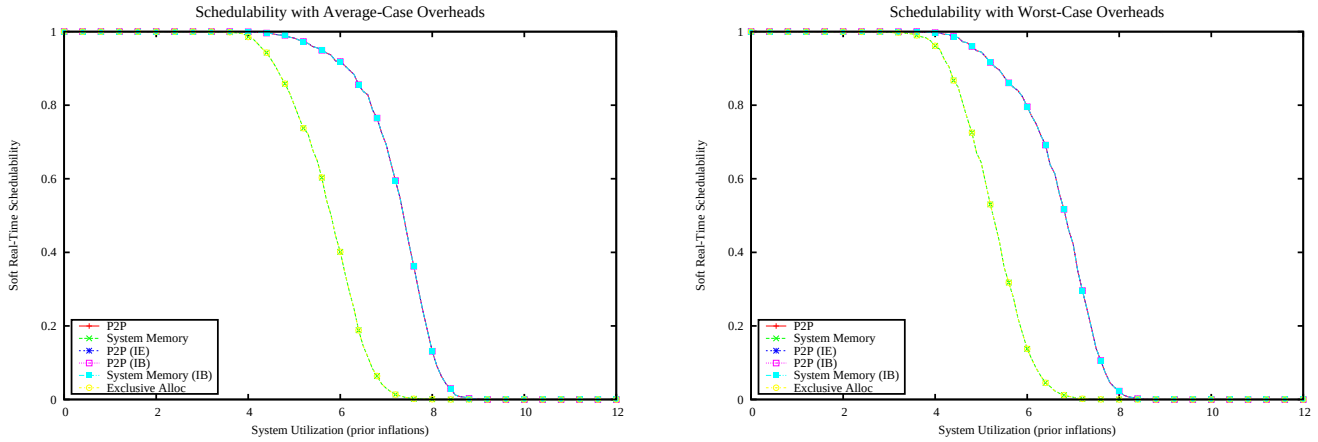

Figure 288: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

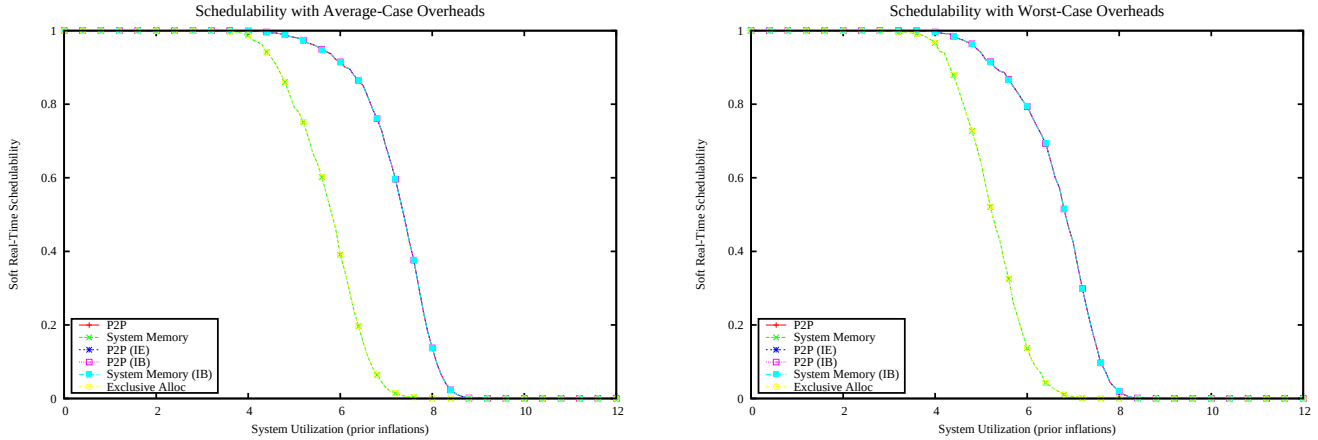

Figure 289: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

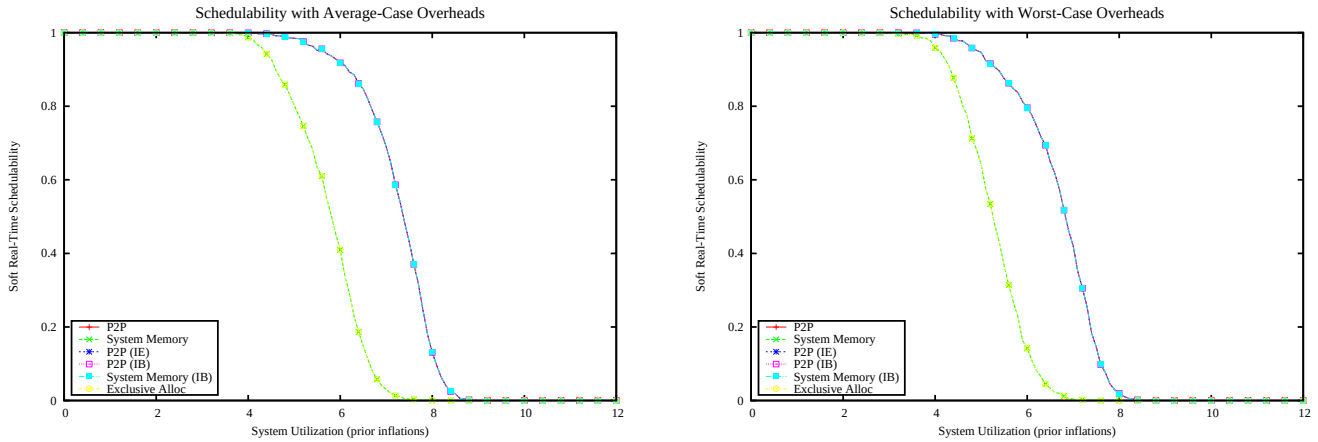

Figure 290: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

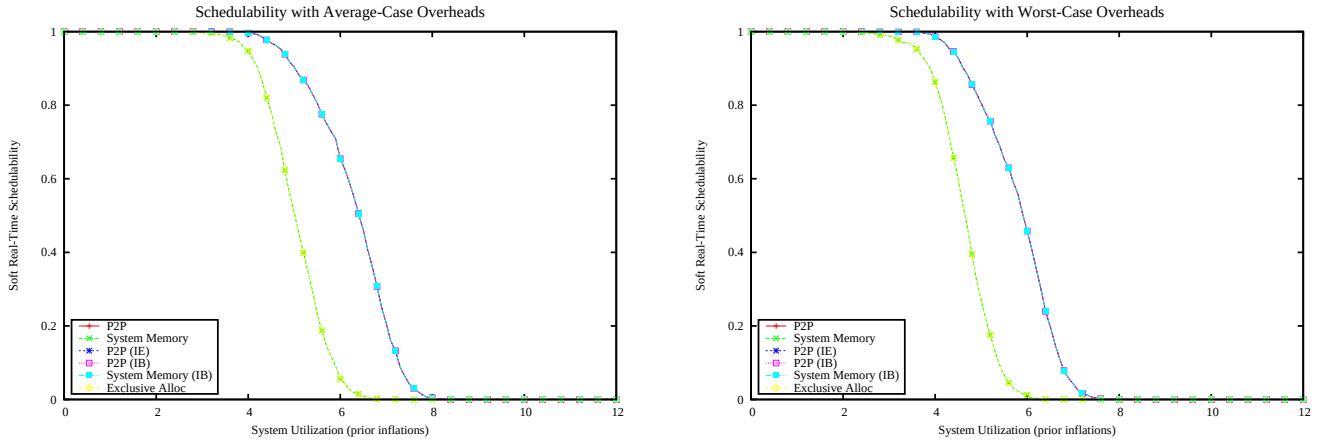

Figure 291: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

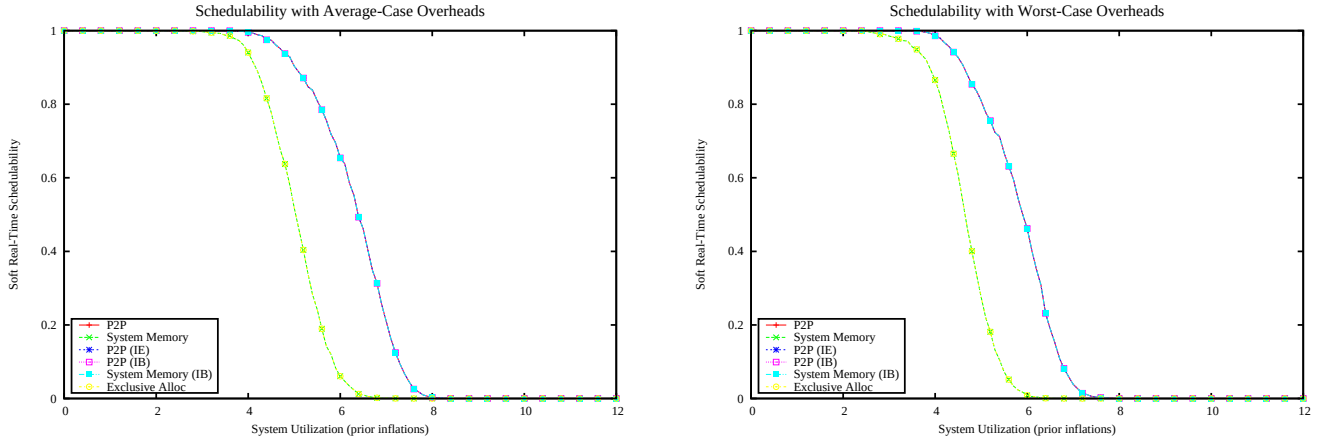

Figure 292: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

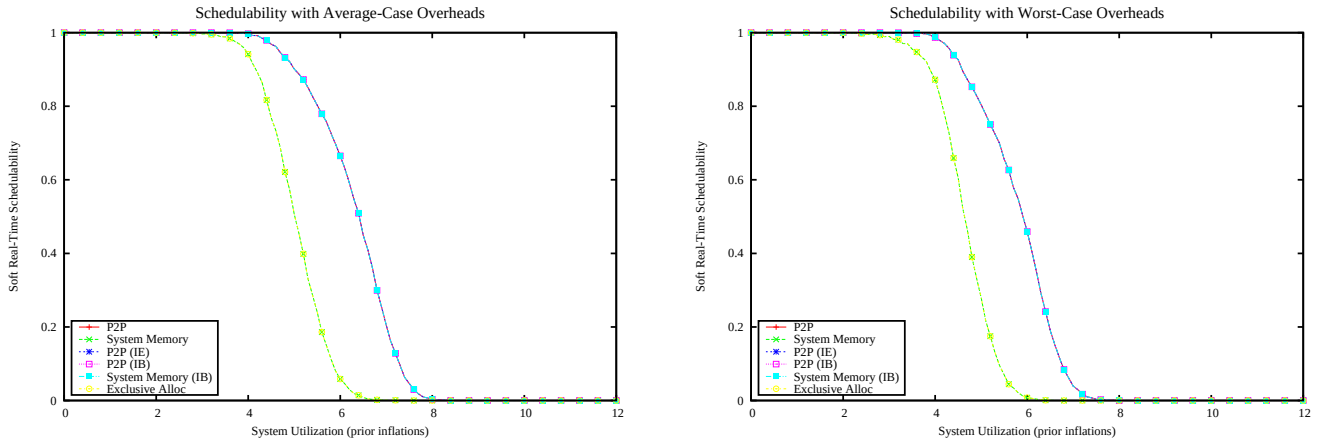

Figure 293: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

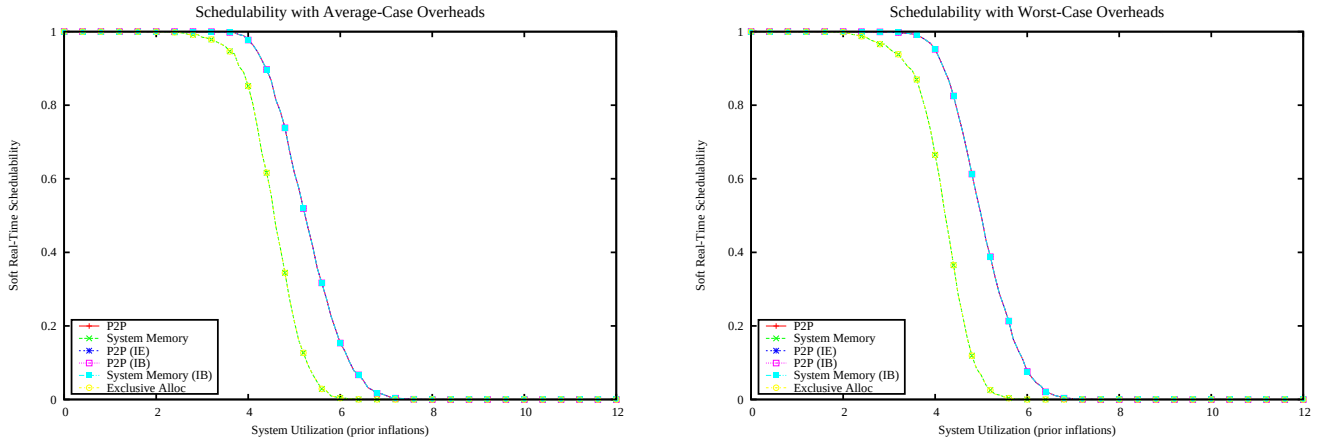

Figure 294: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

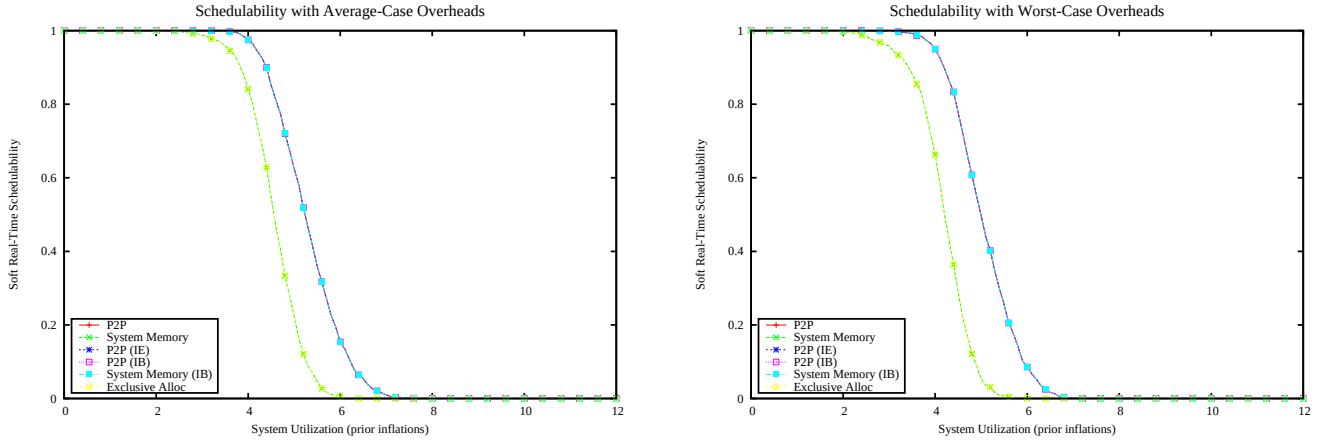

Figure 295: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

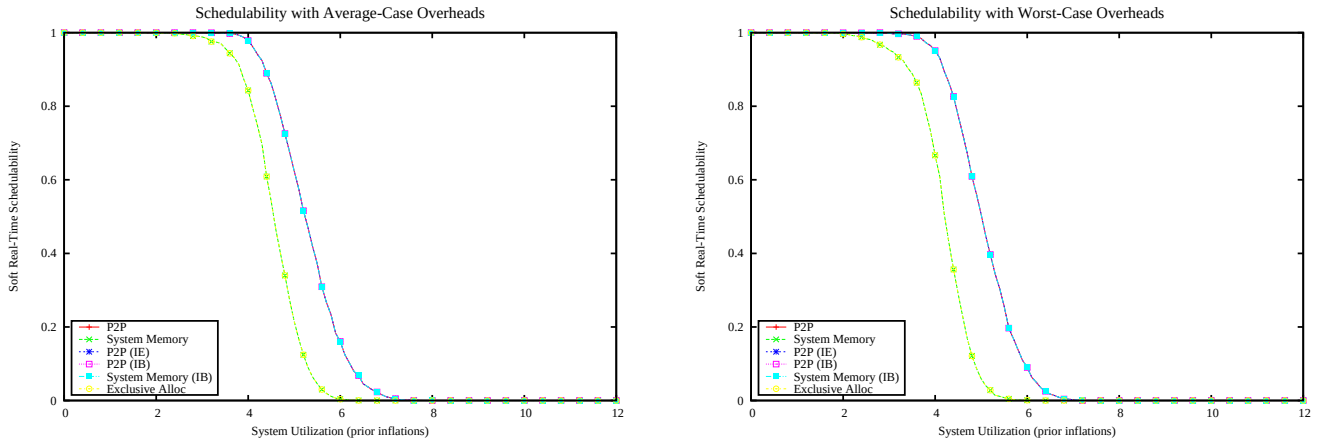

Figure 296: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

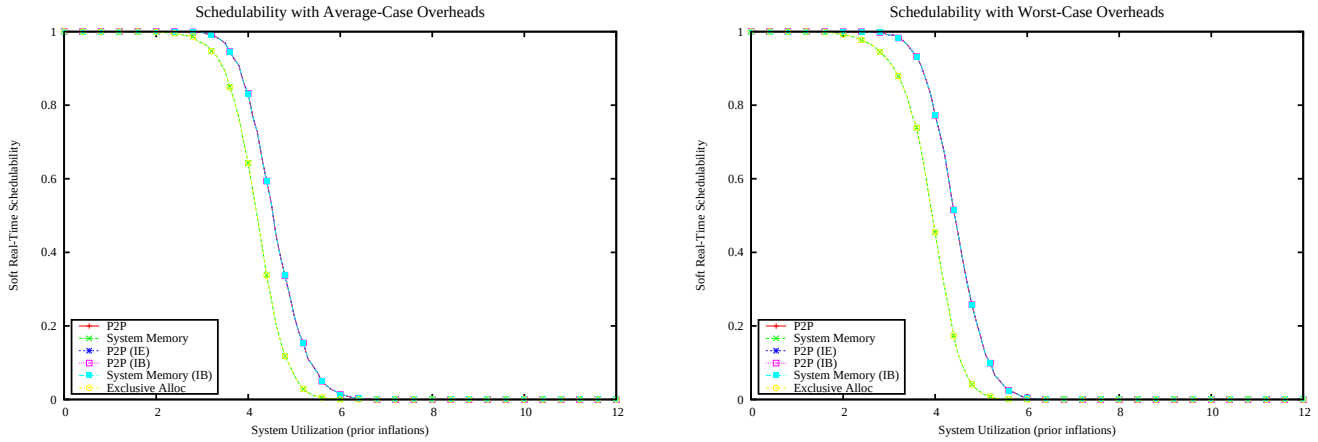

Figure 297: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

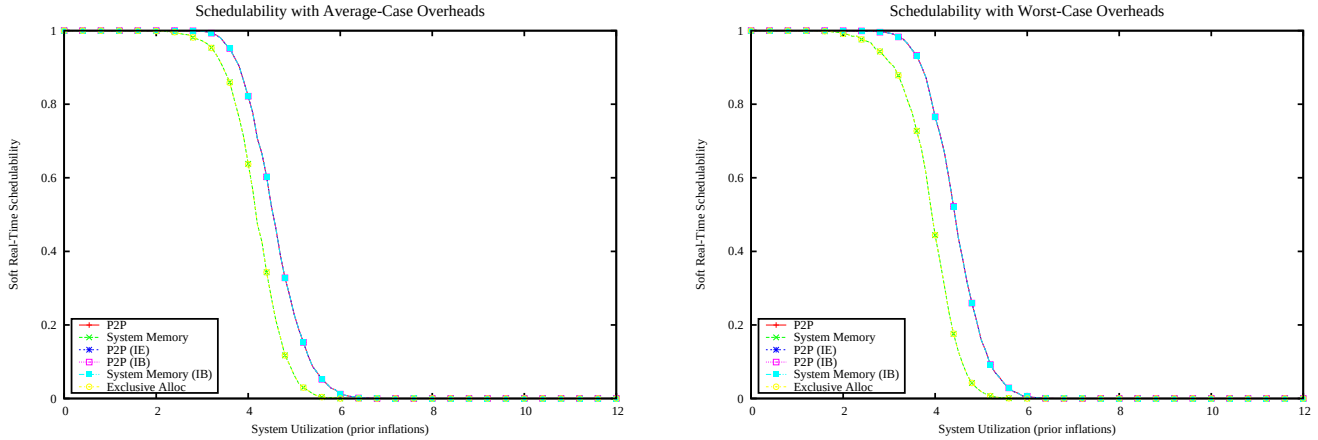

Figure 298: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

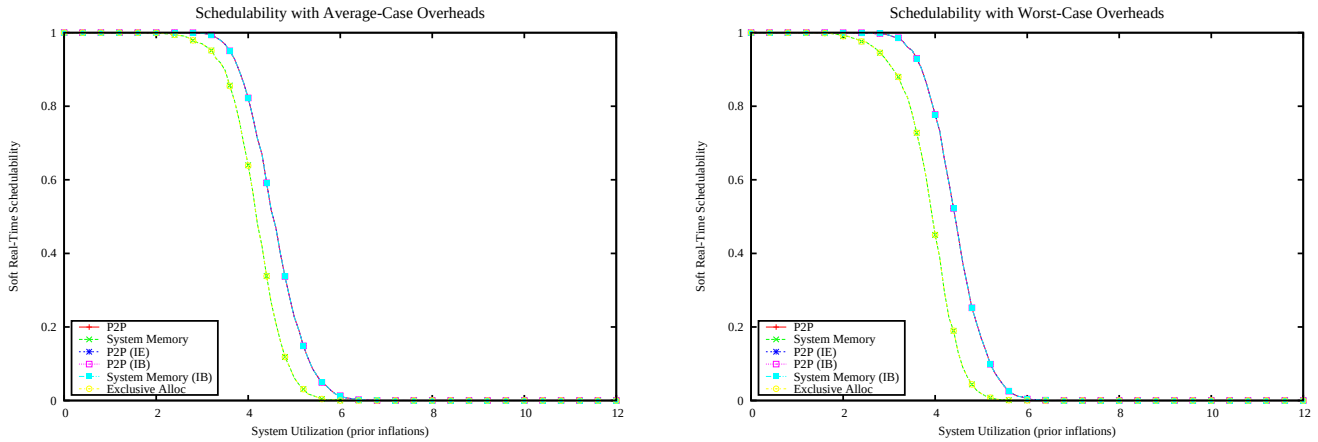

Figure 299: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

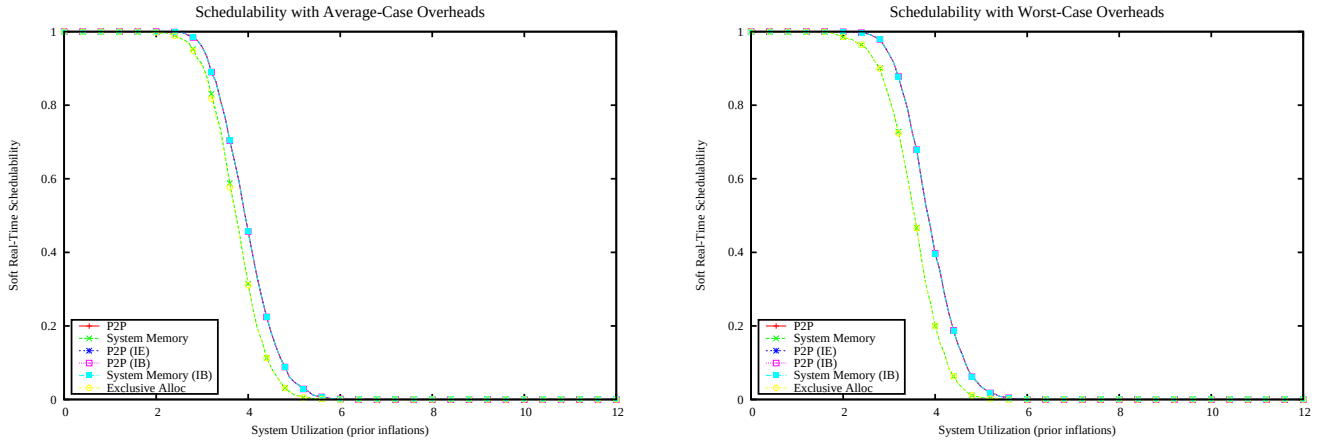

Figure 300: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

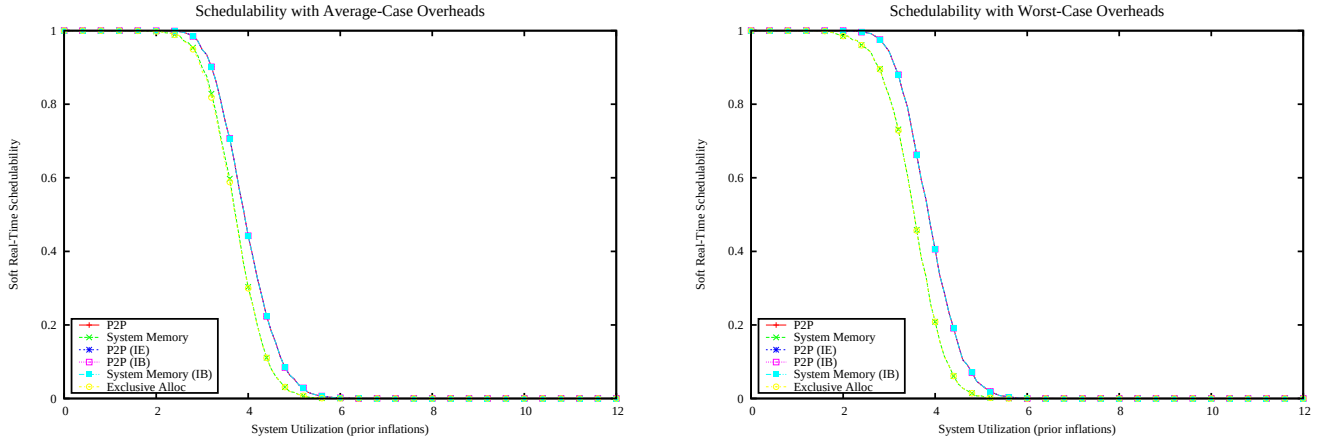

Figure 301: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

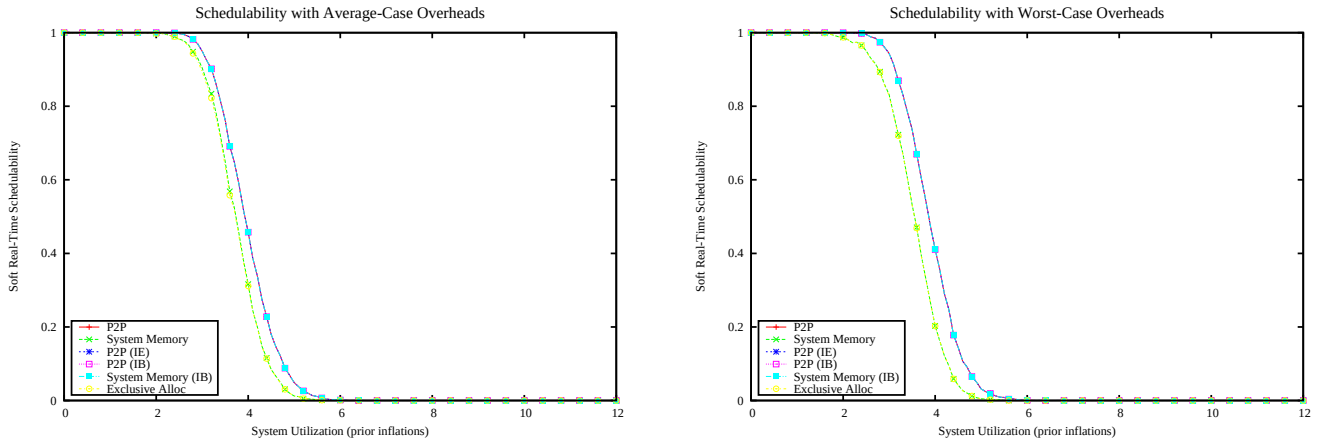

Figure 302: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

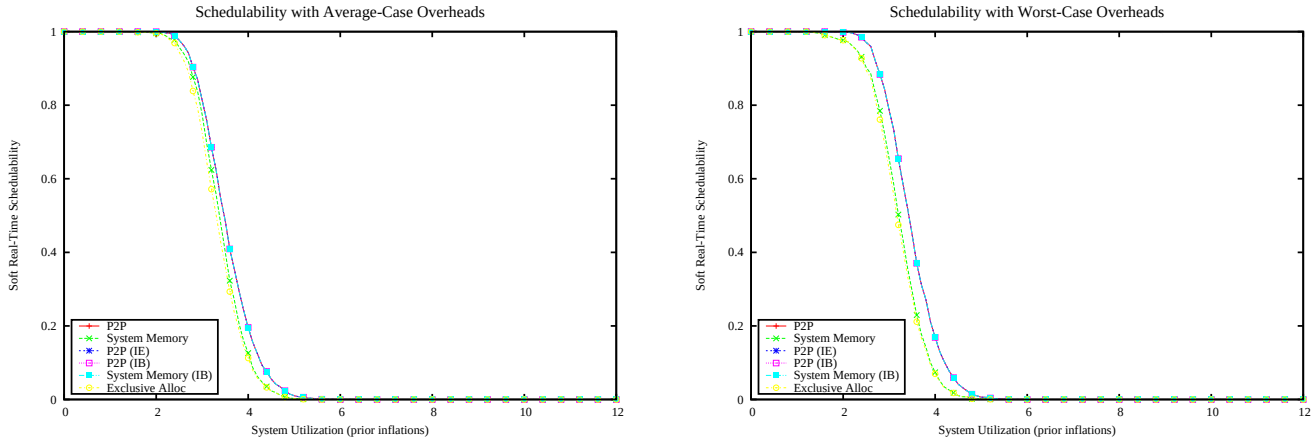

Figure 303: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

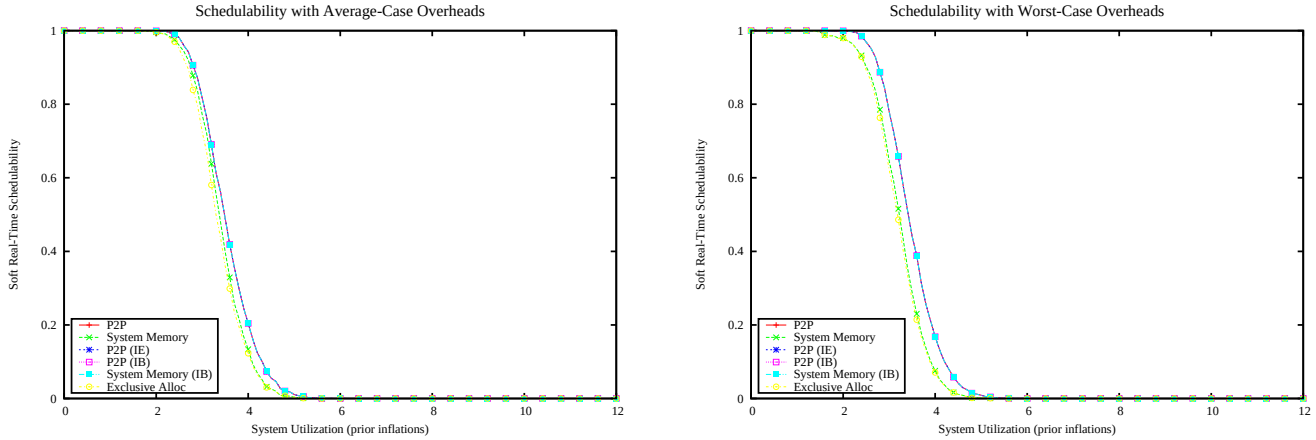

Figure 304: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

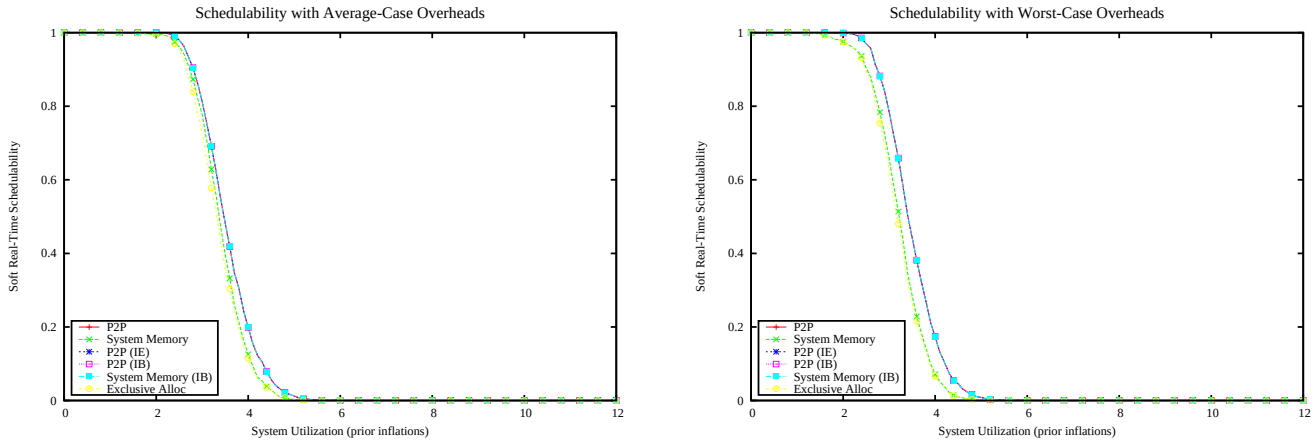

Figure 305: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

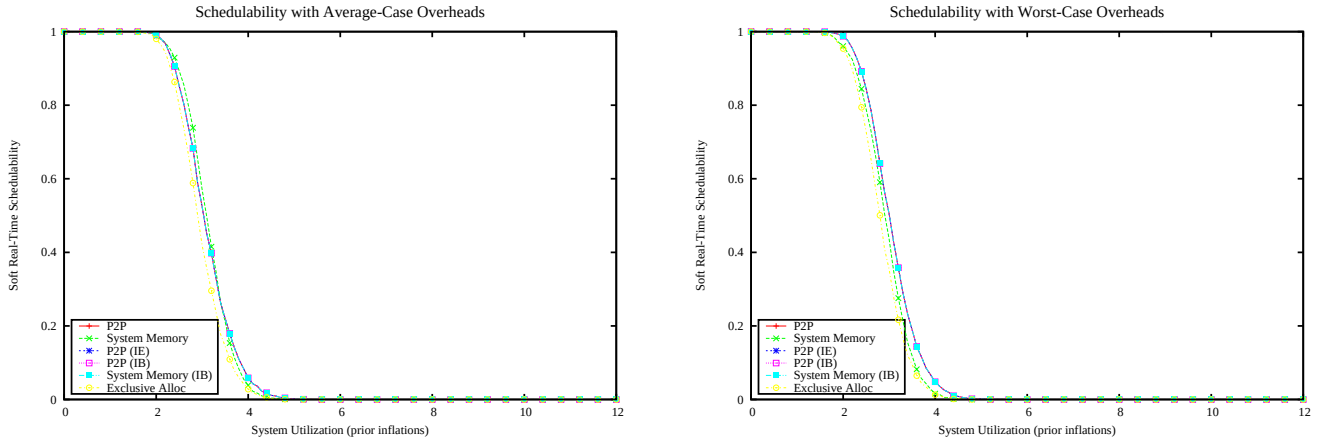

Figure 306: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

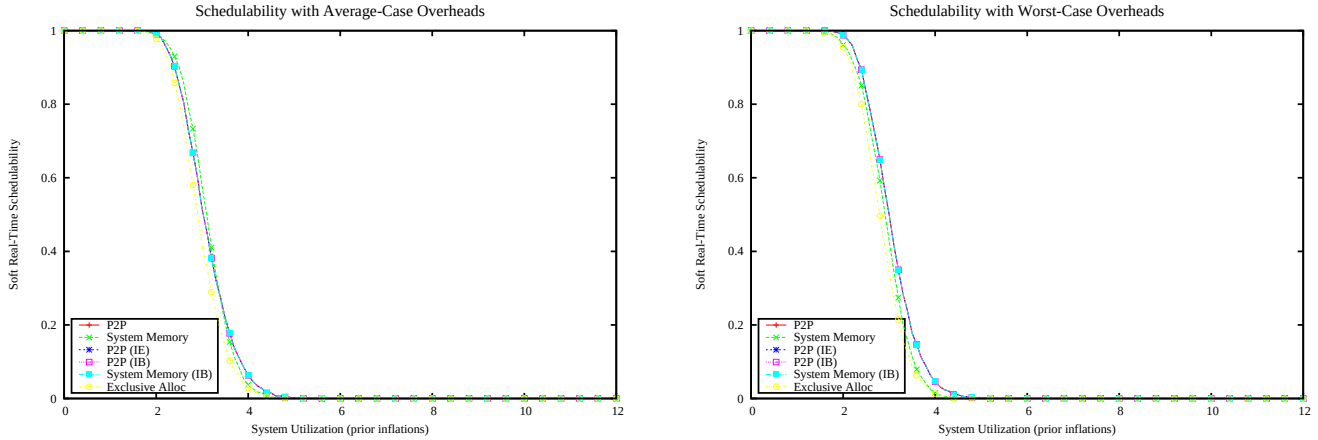

Figure 307: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

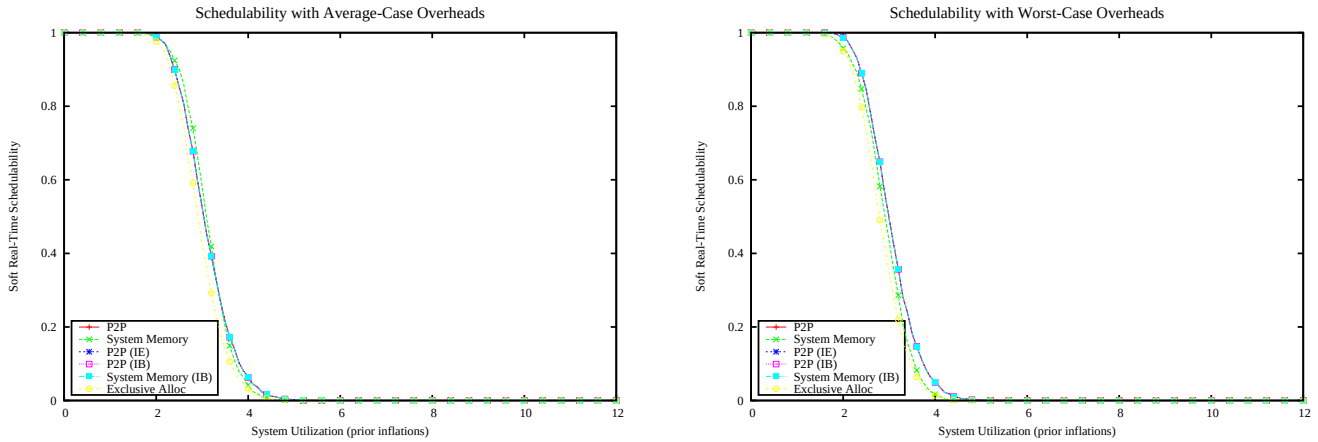

Figure 308: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

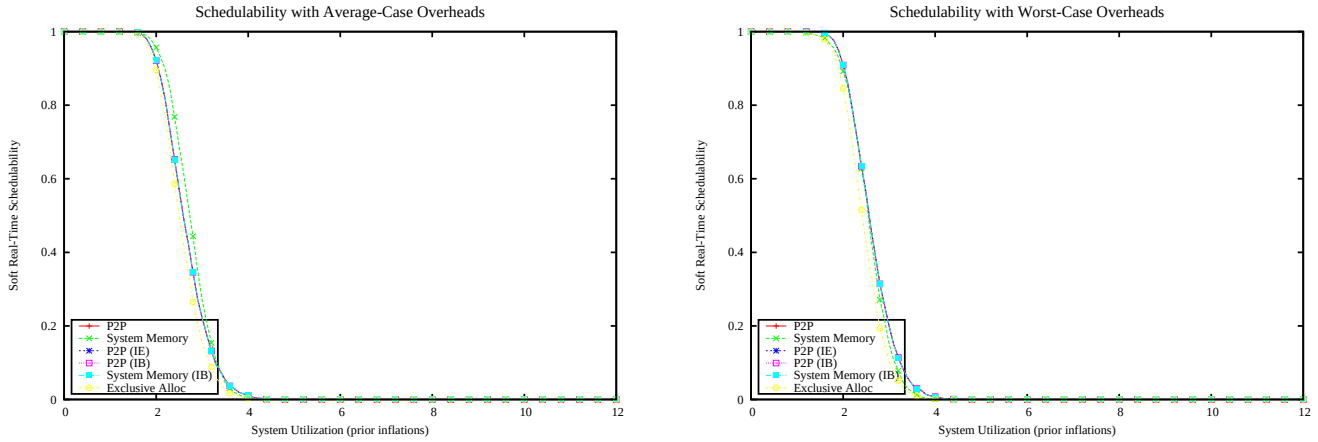

Figure 309: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

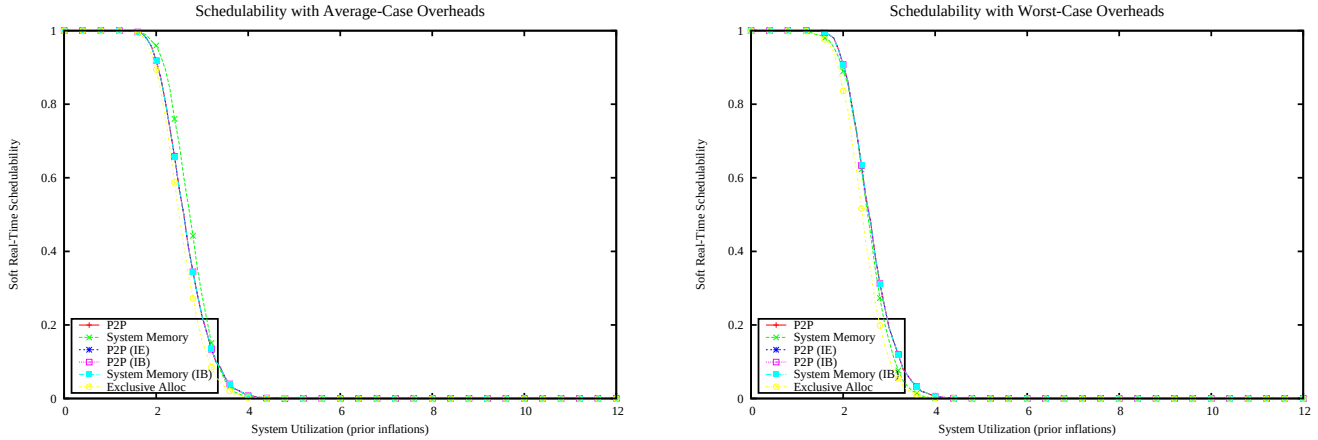

Figure 310: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

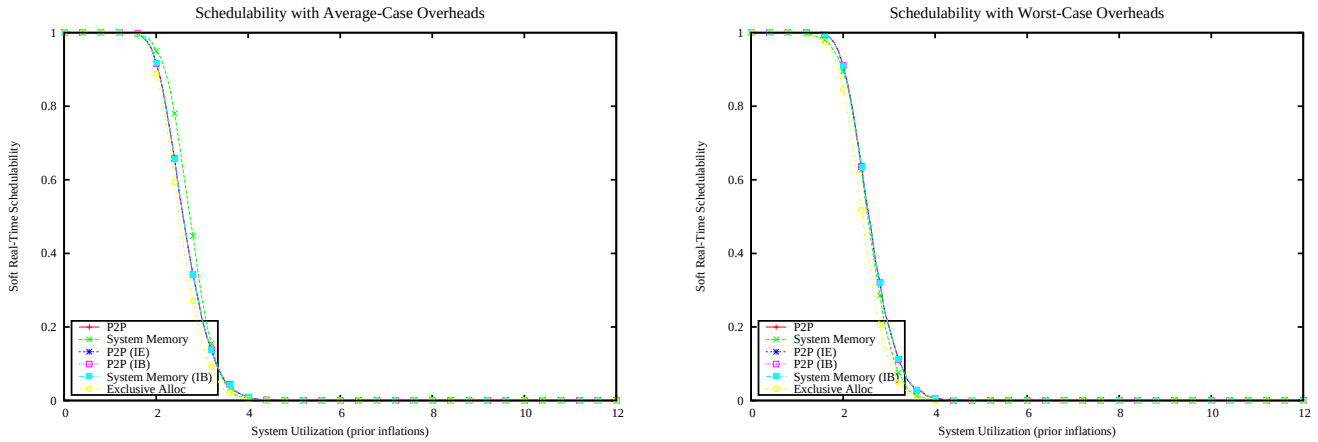

Figure 311: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

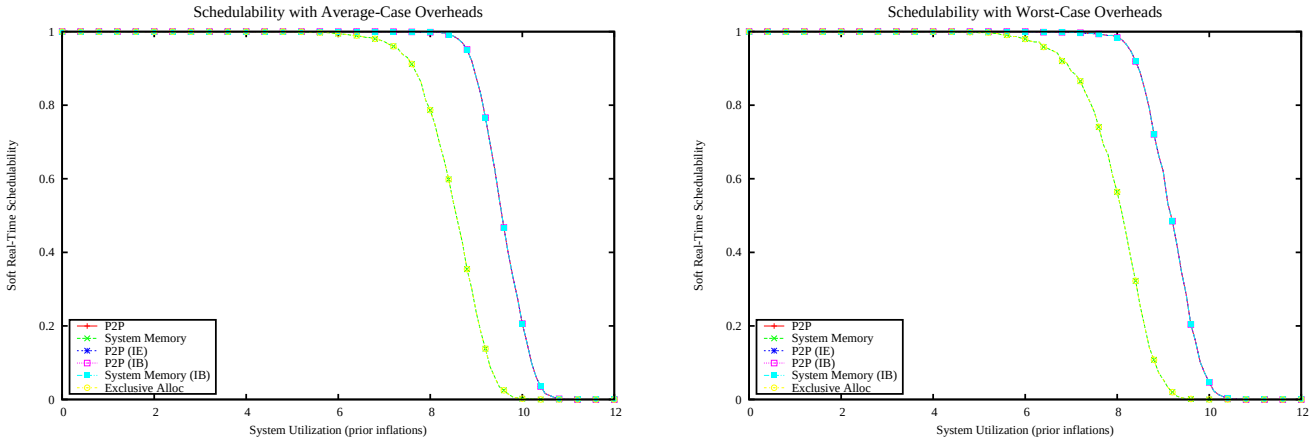

Figure 312: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

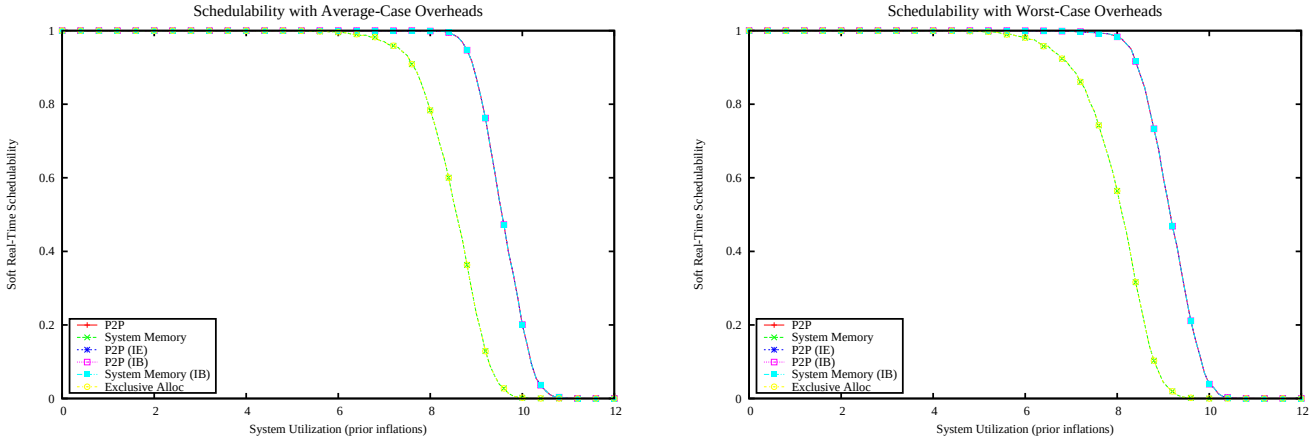

Figure 313: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

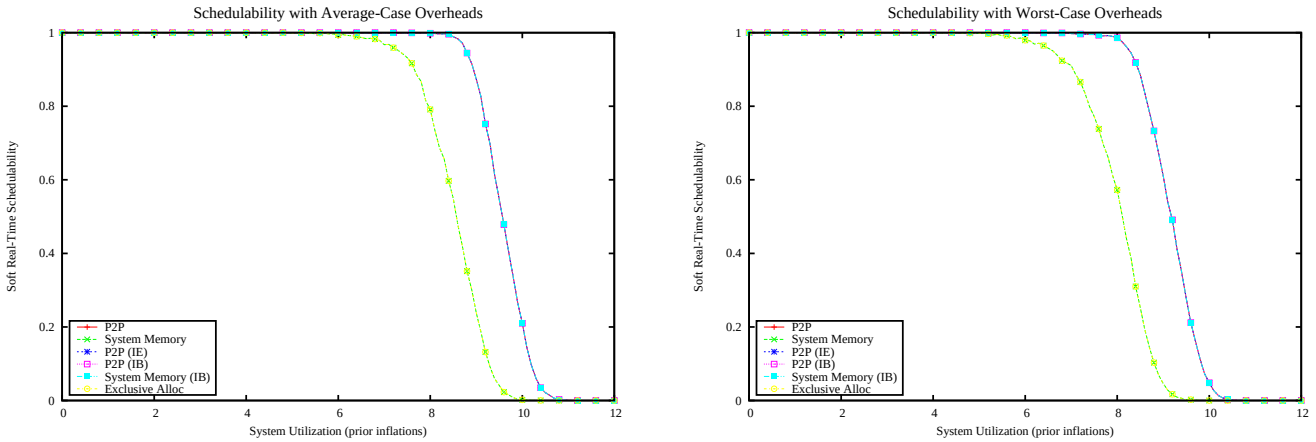

Figure 314: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

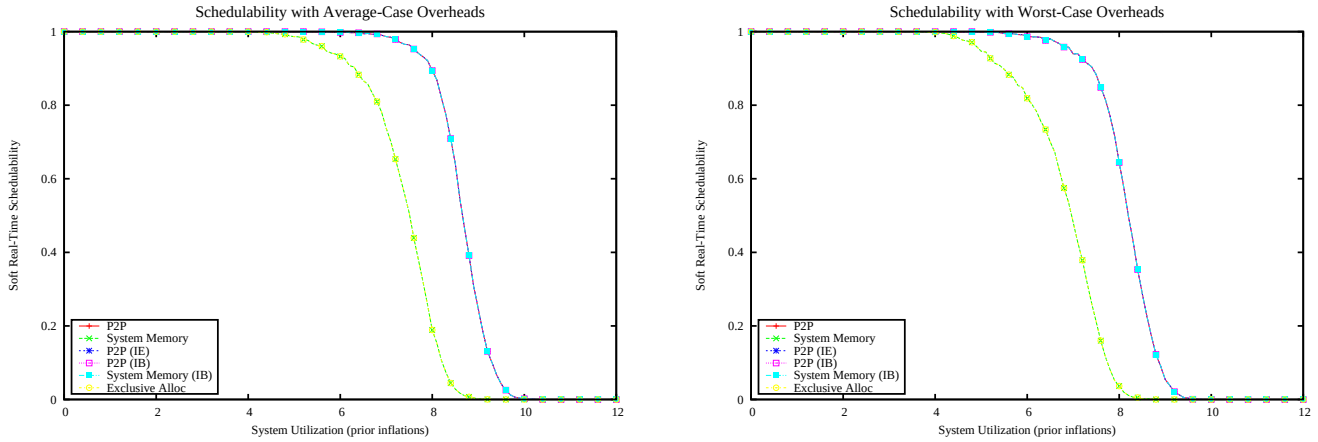

Figure 315: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

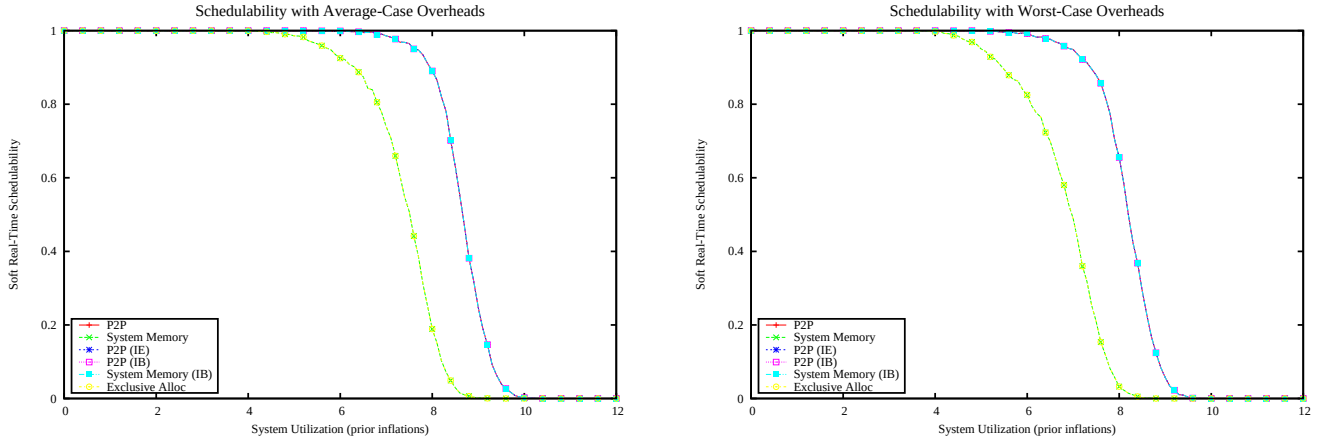

Figure 316: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

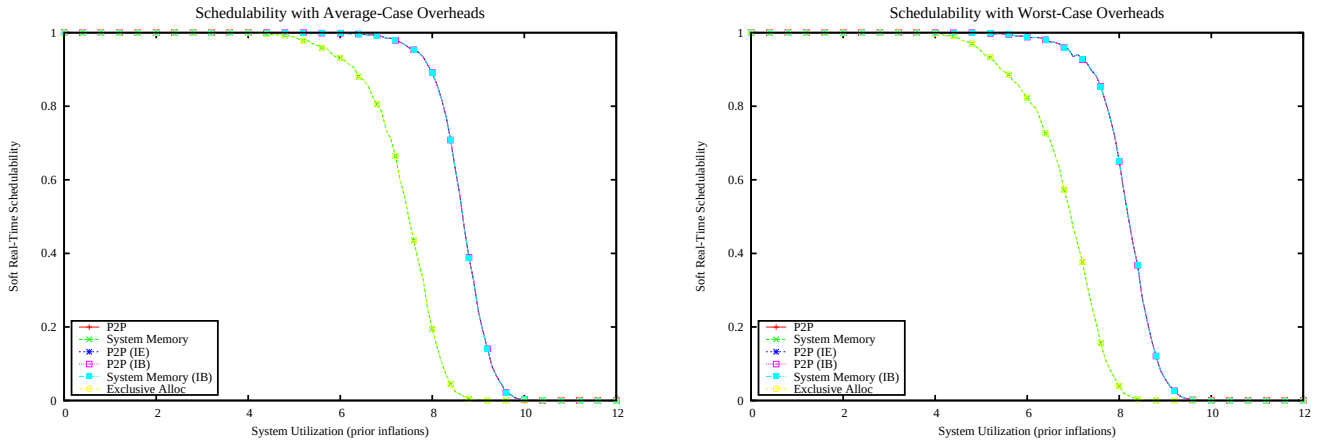

Figure 317: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

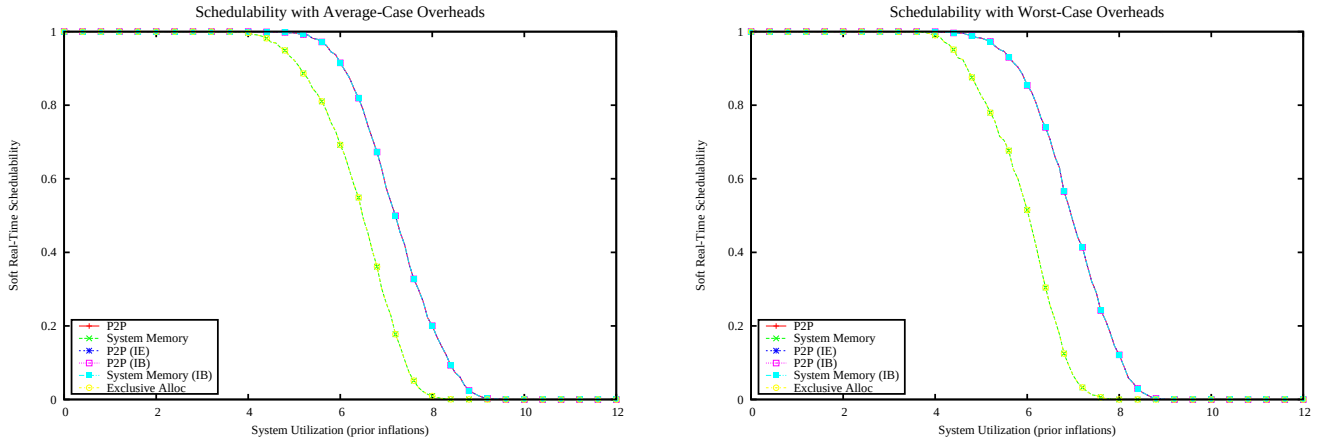

Figure 318: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

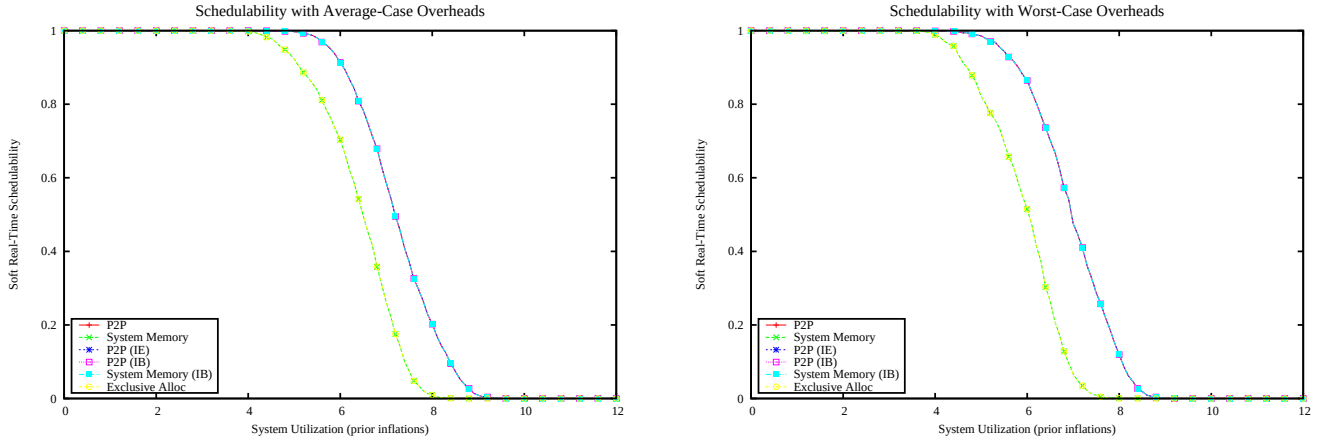

Figure 319: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

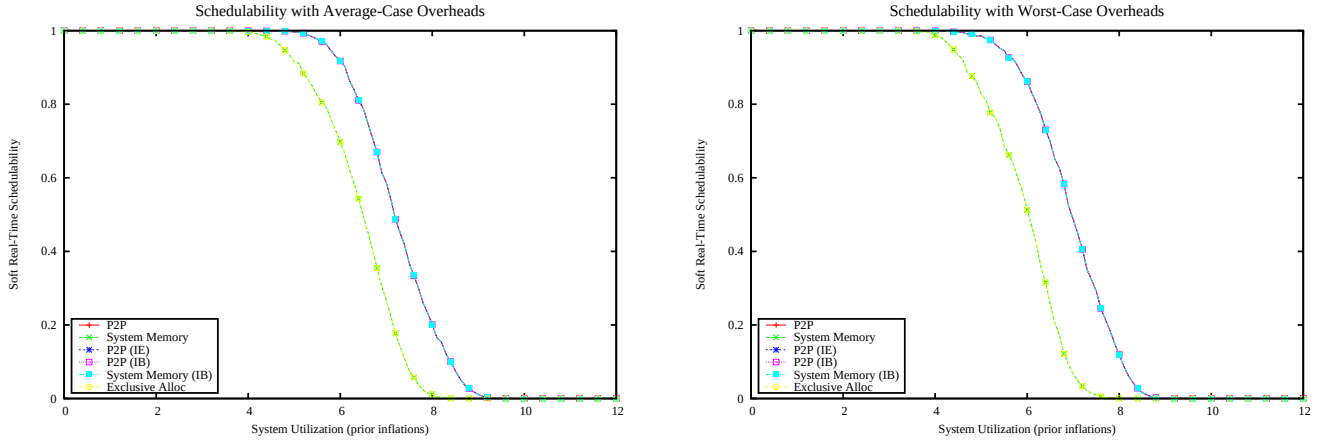

Figure 320: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

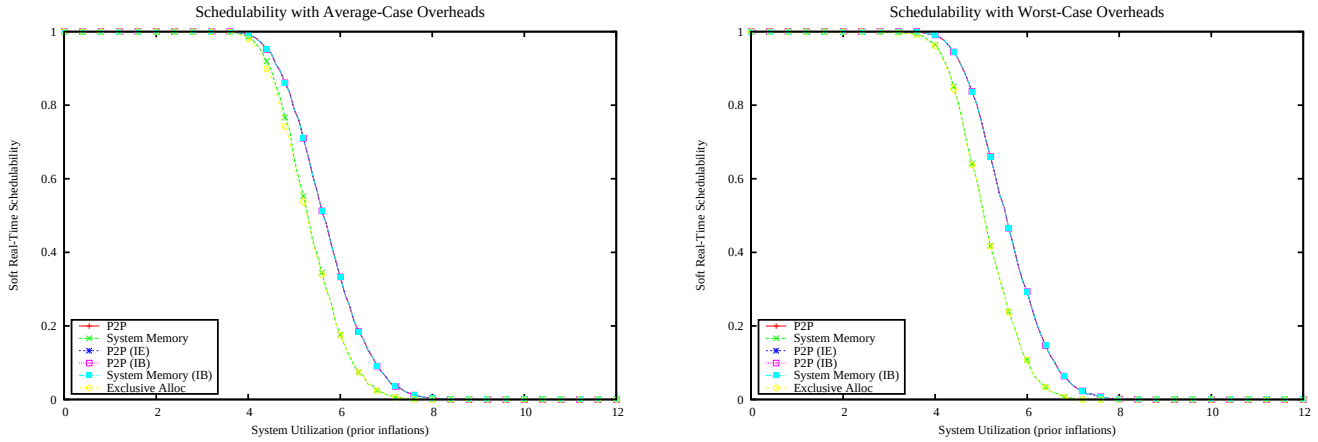

Figure 321: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

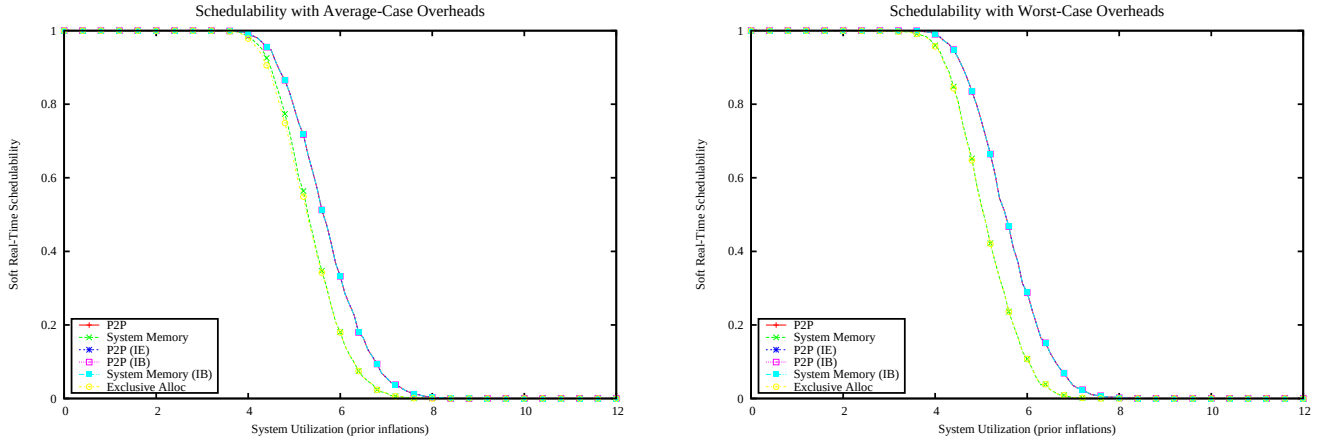

Figure 322: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

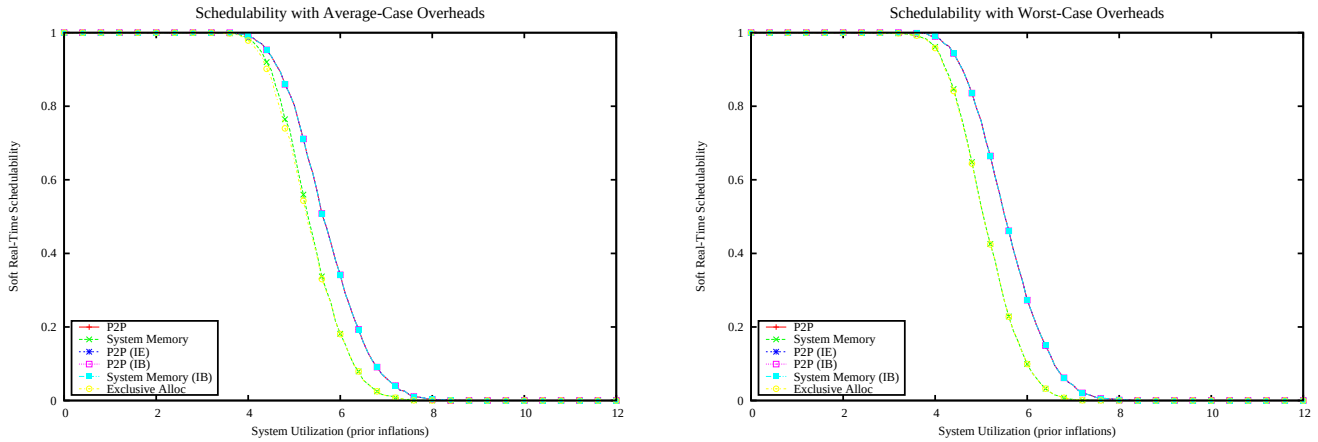

Figure 323: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

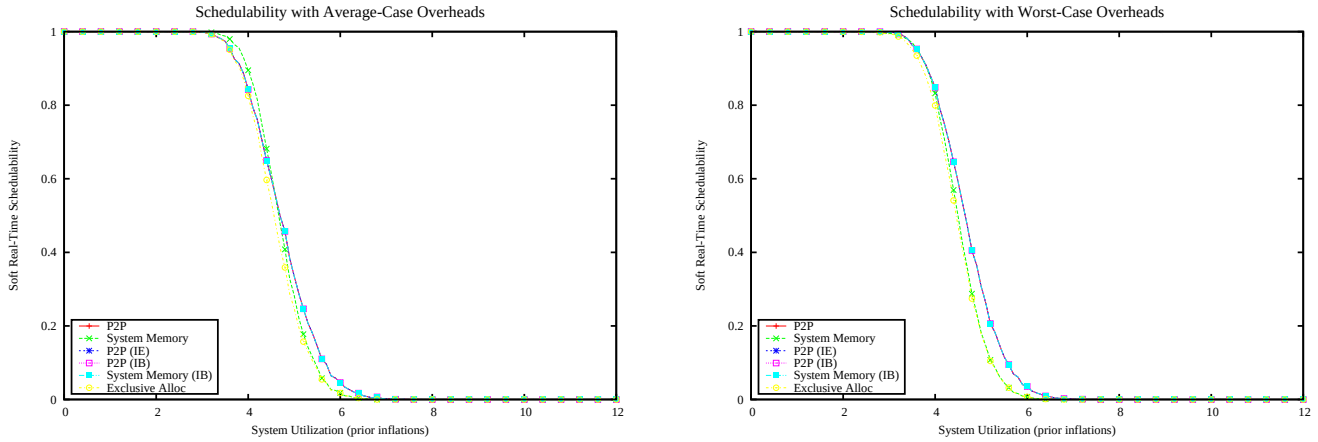

Figure 324: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

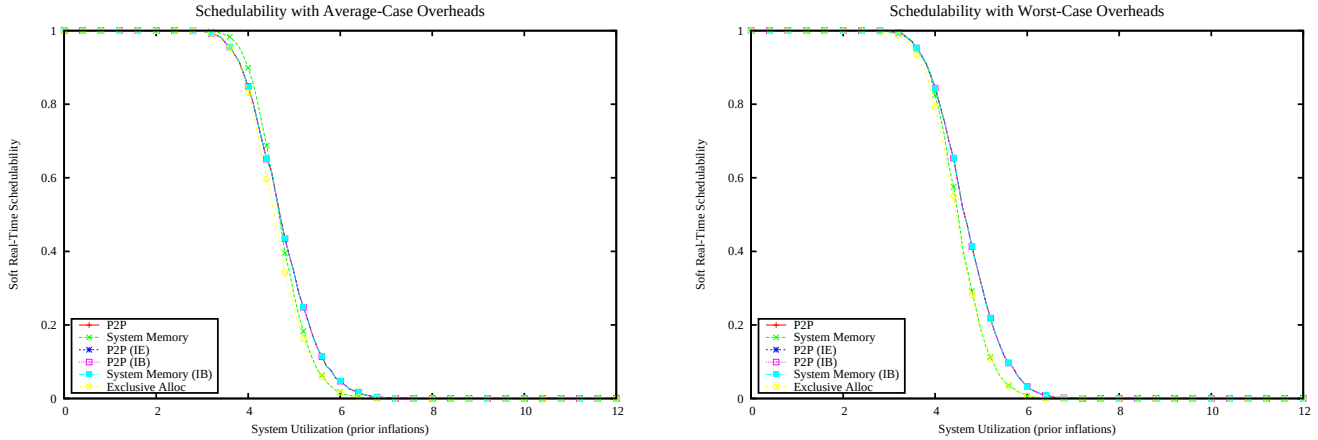

Figure 325: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

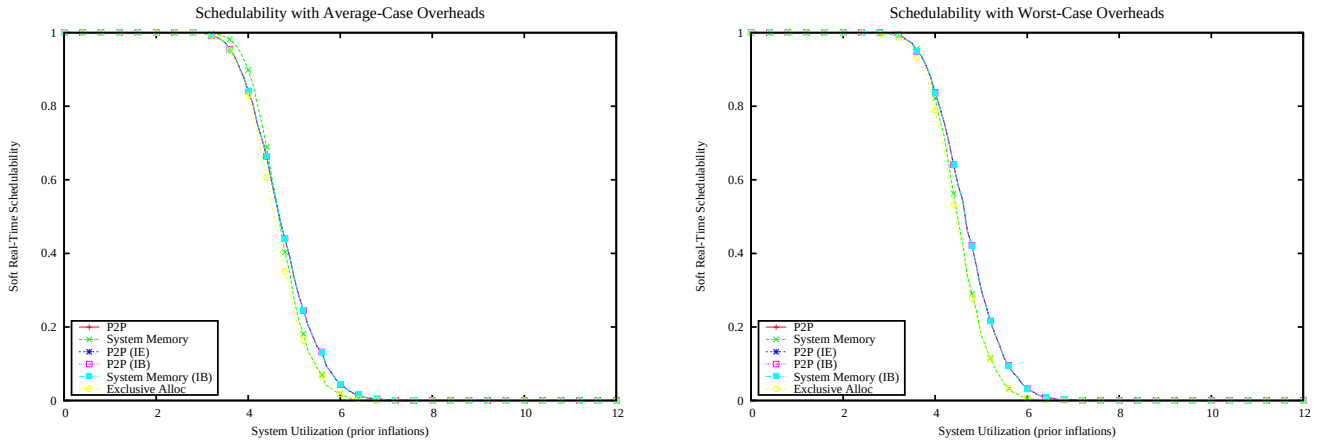

Figure 326: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

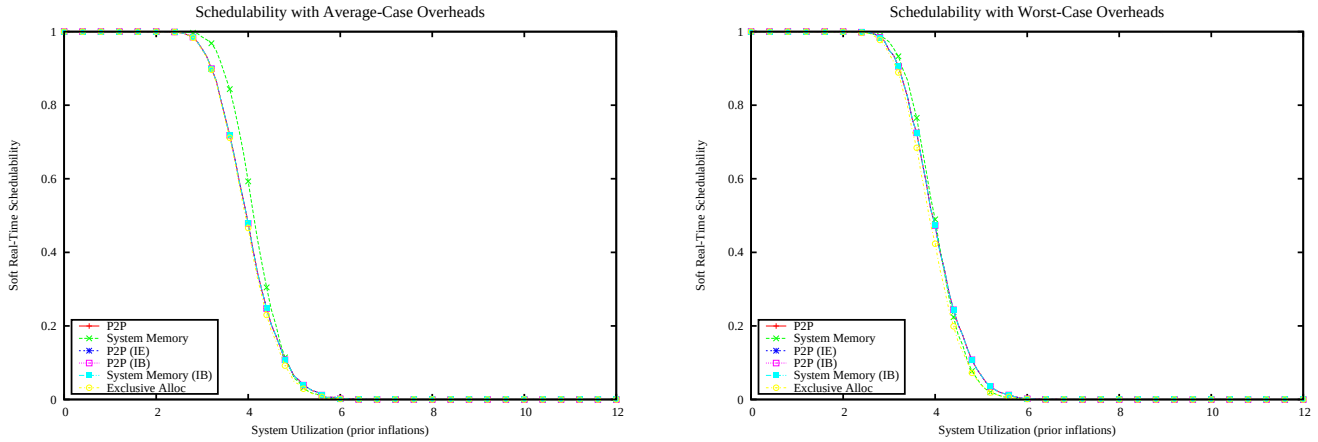

Figure 327: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

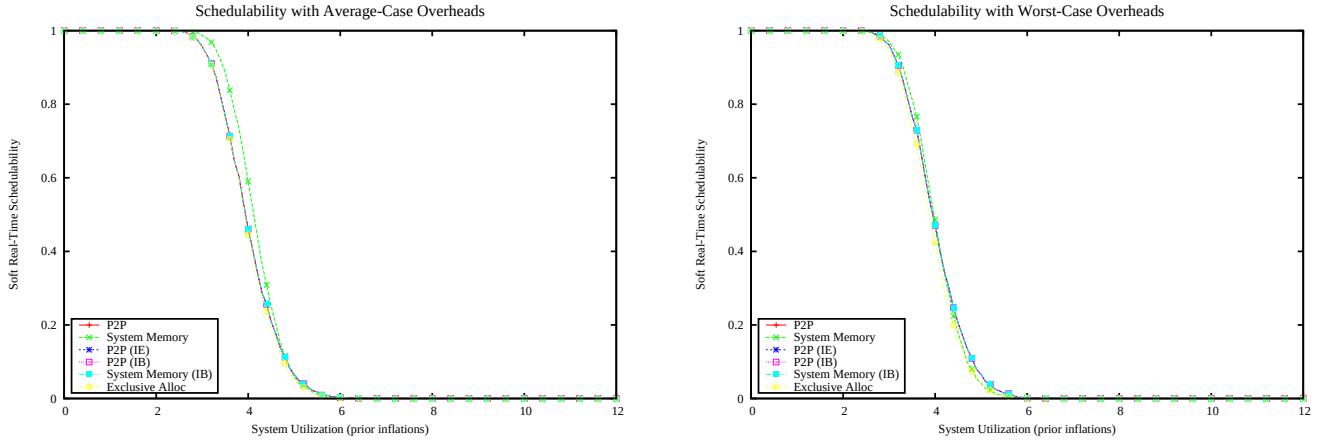

Figure 328: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

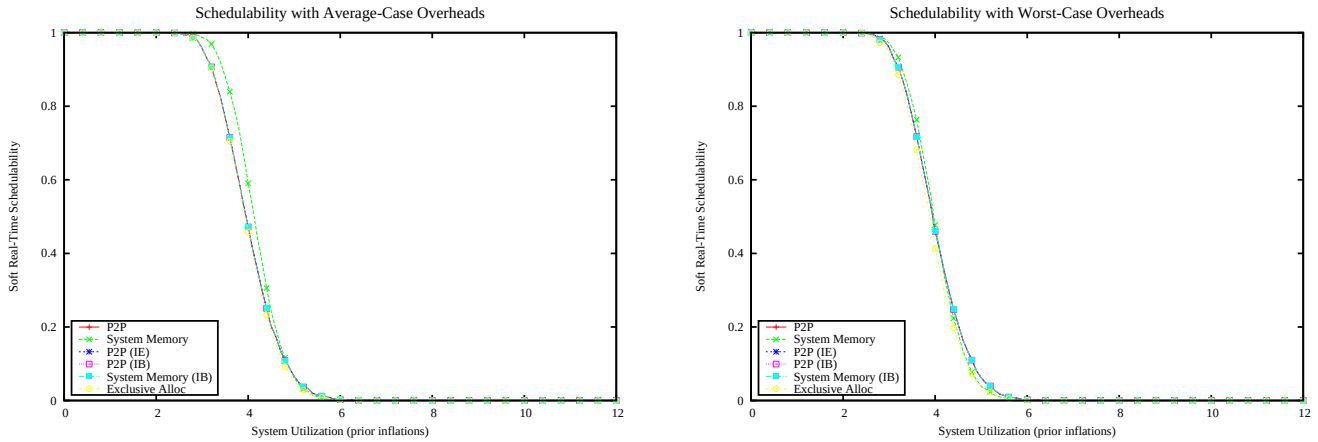

Figure 329: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

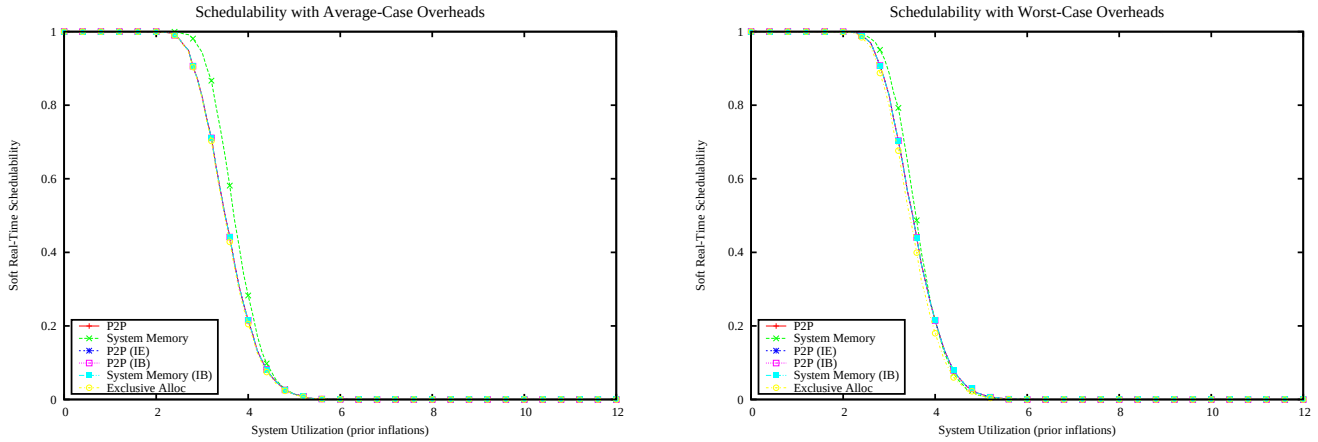

Figure 330: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

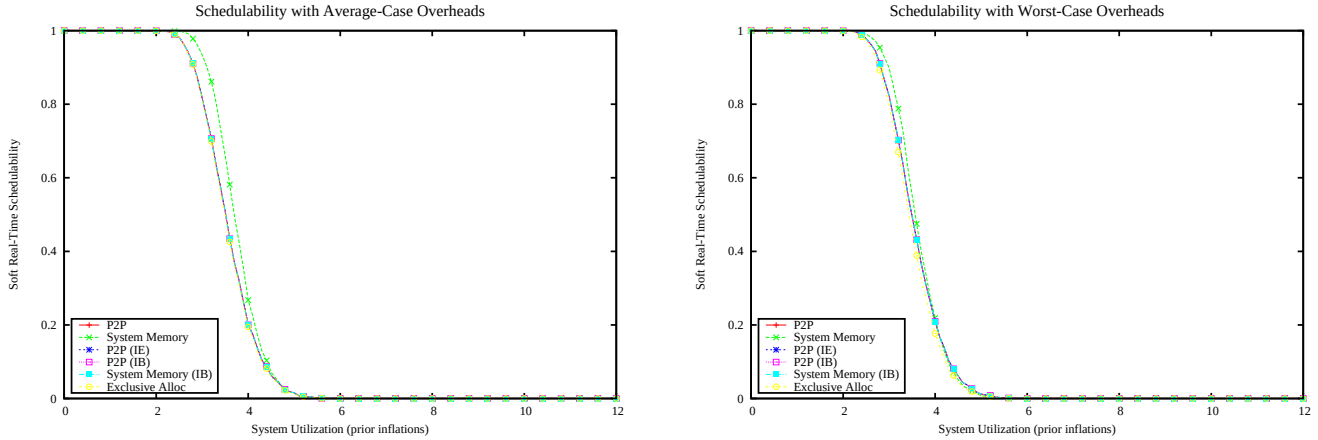

Figure 331: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

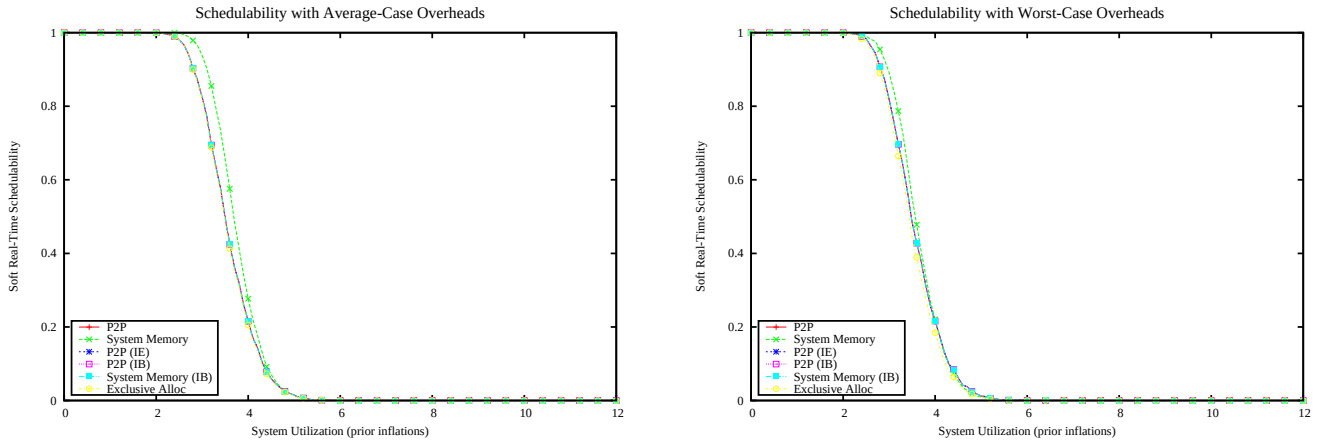

Figure 332: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

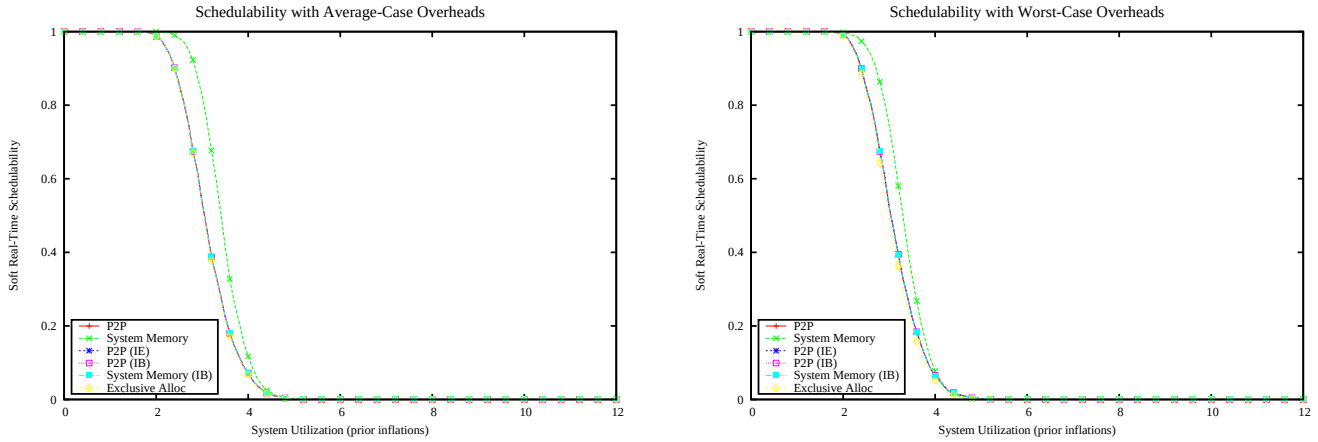

Figure 333: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

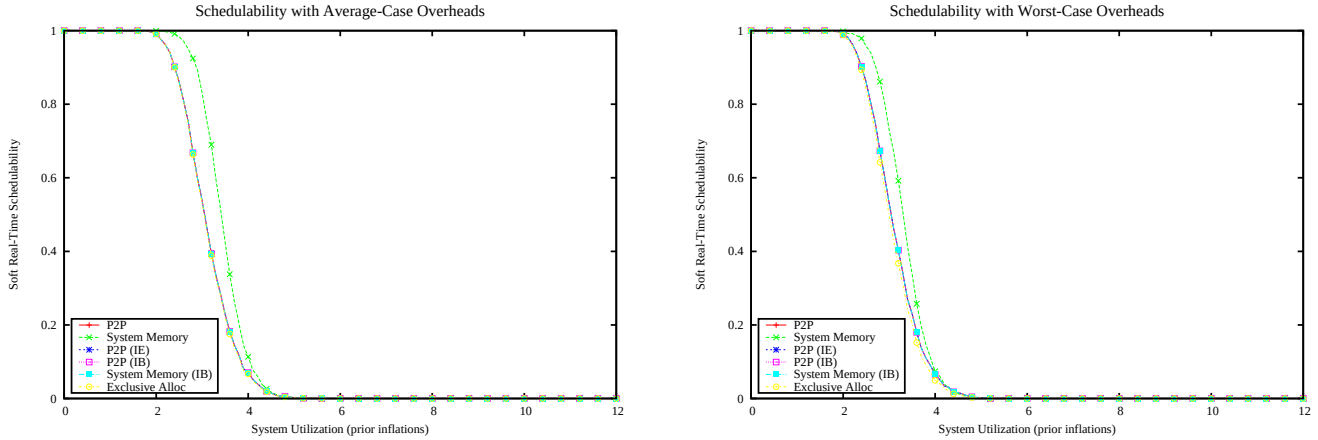

Figure 334: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

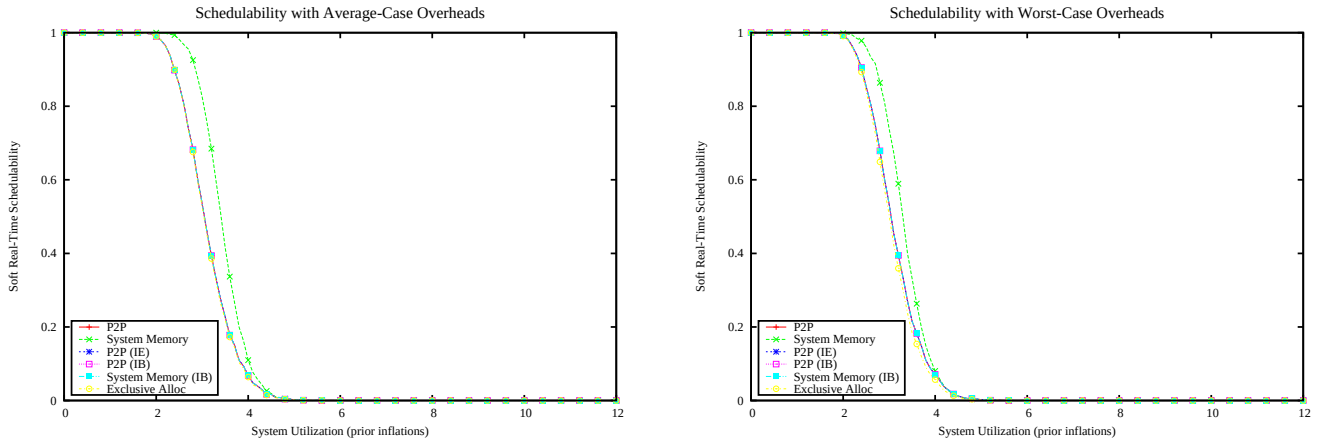

Figure 335: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

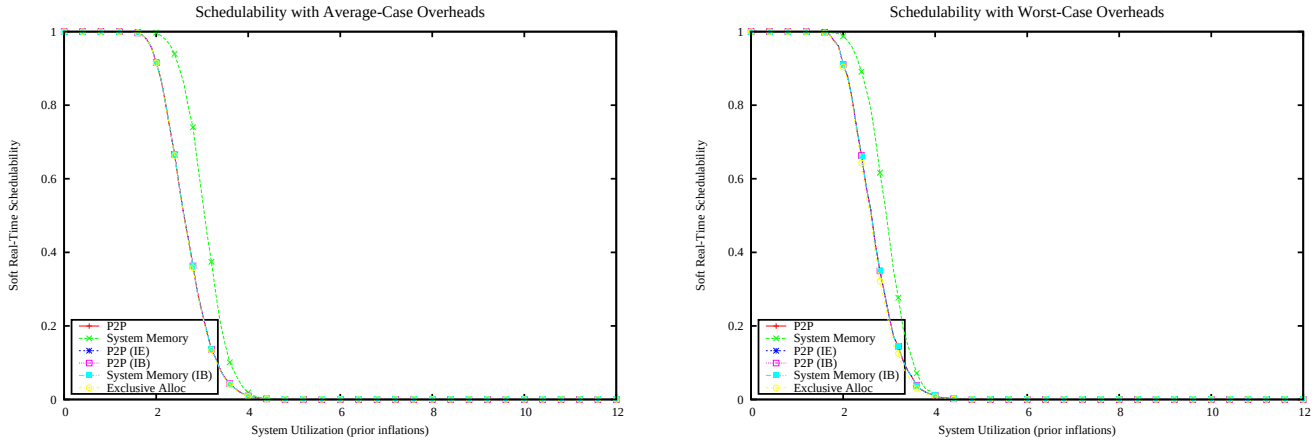

Figure 336: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

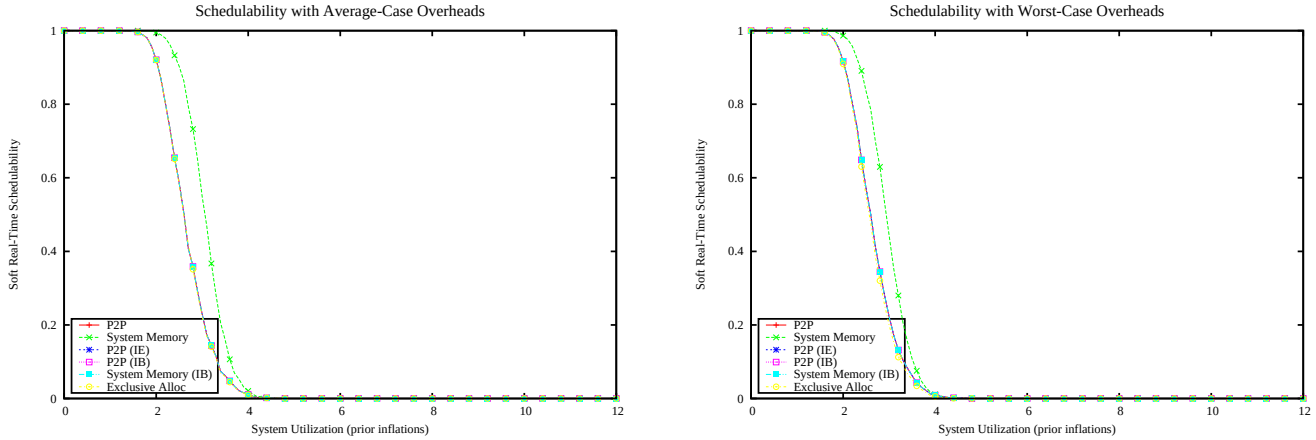

Figure 337: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

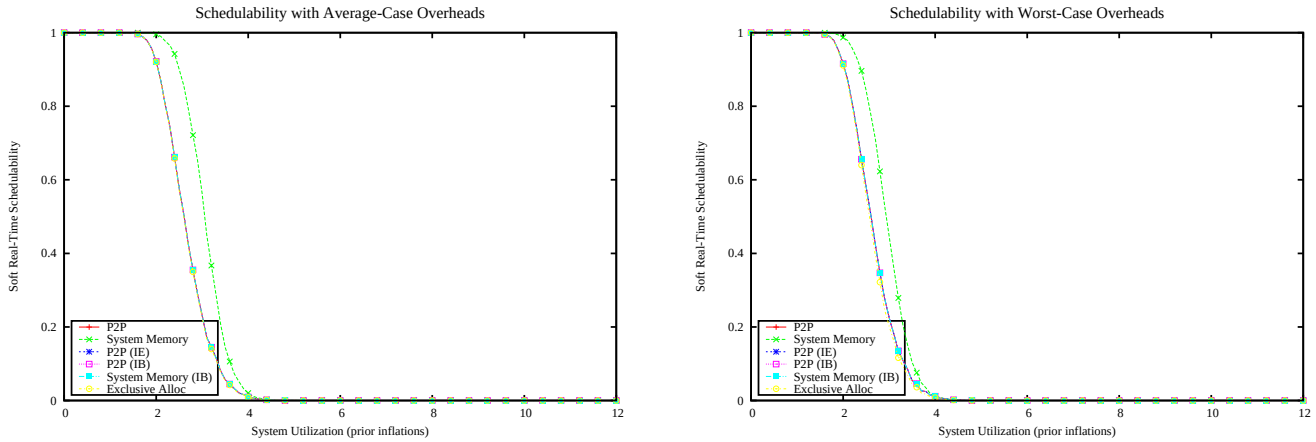

Figure 338: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

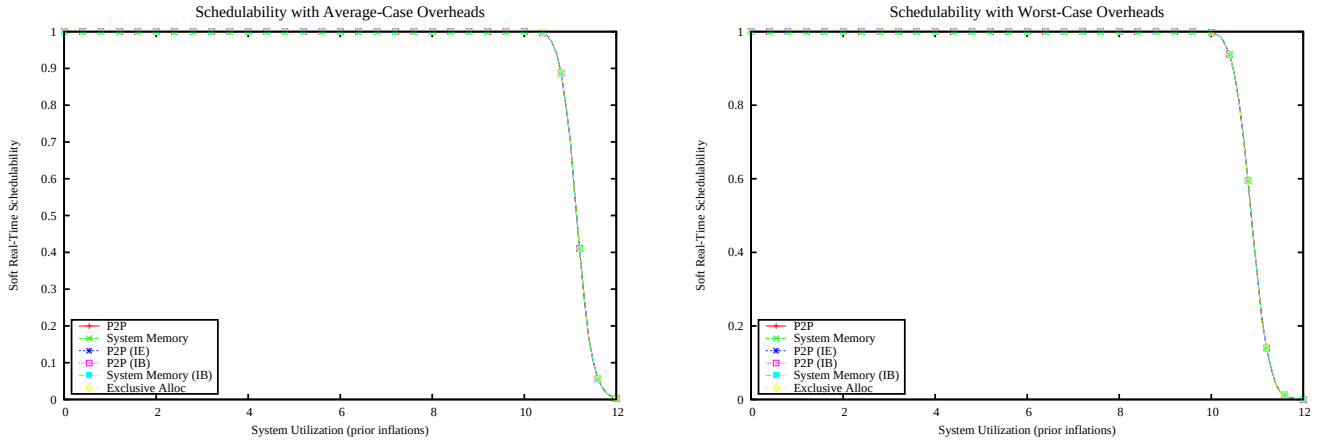

Figure 339: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

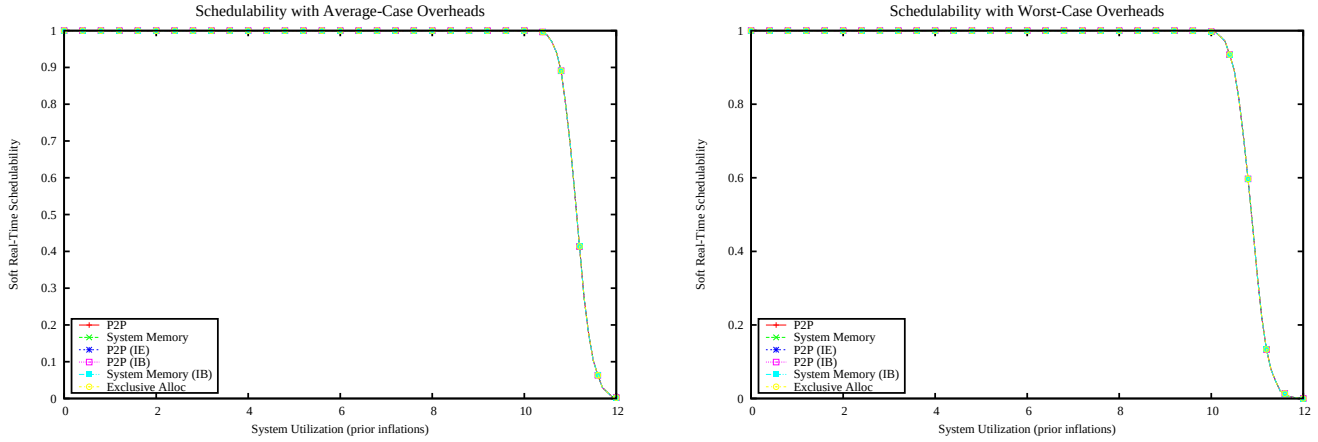

Figure 340: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

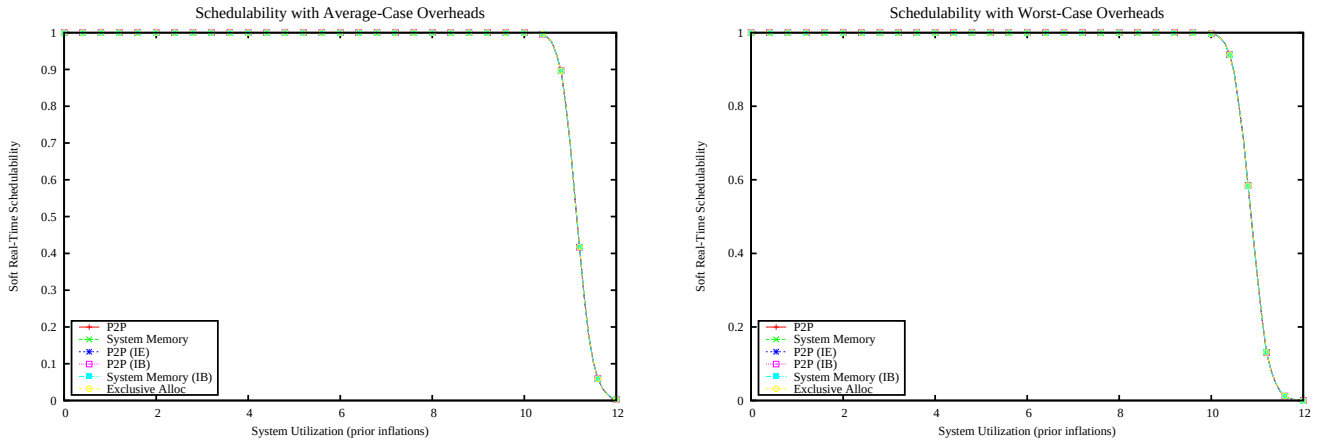

Figure 341: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

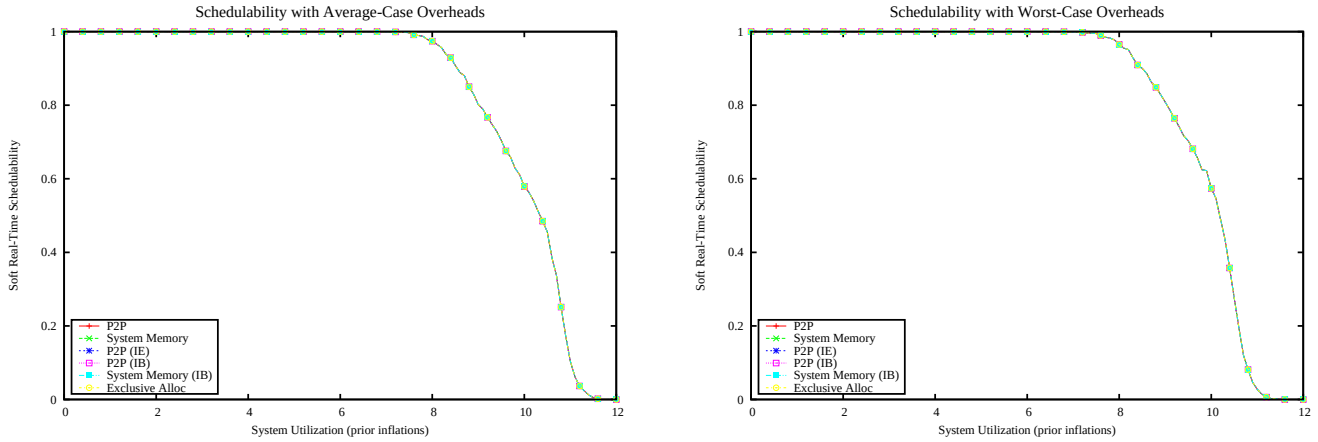

Figure 342: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

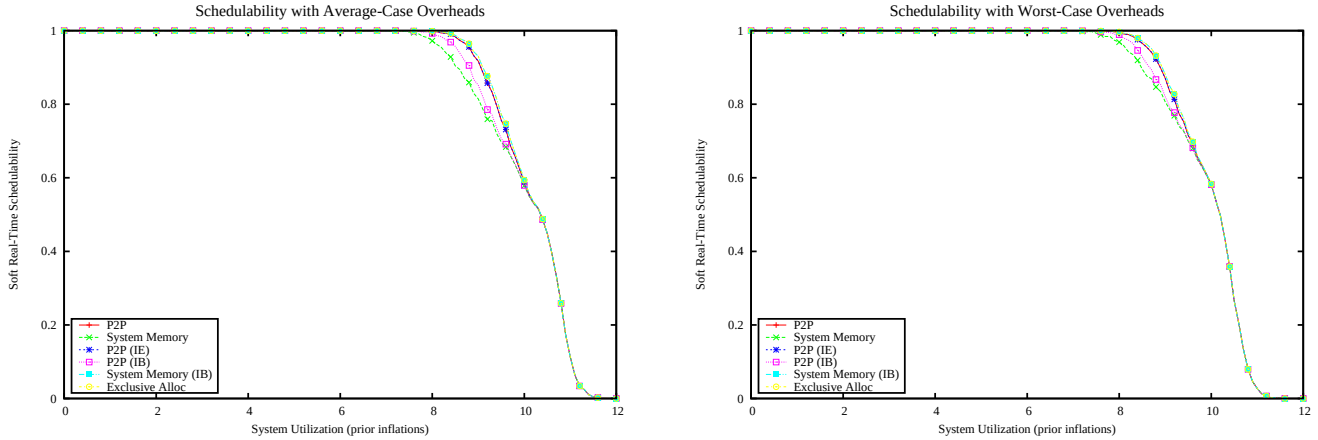

Figure 343: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

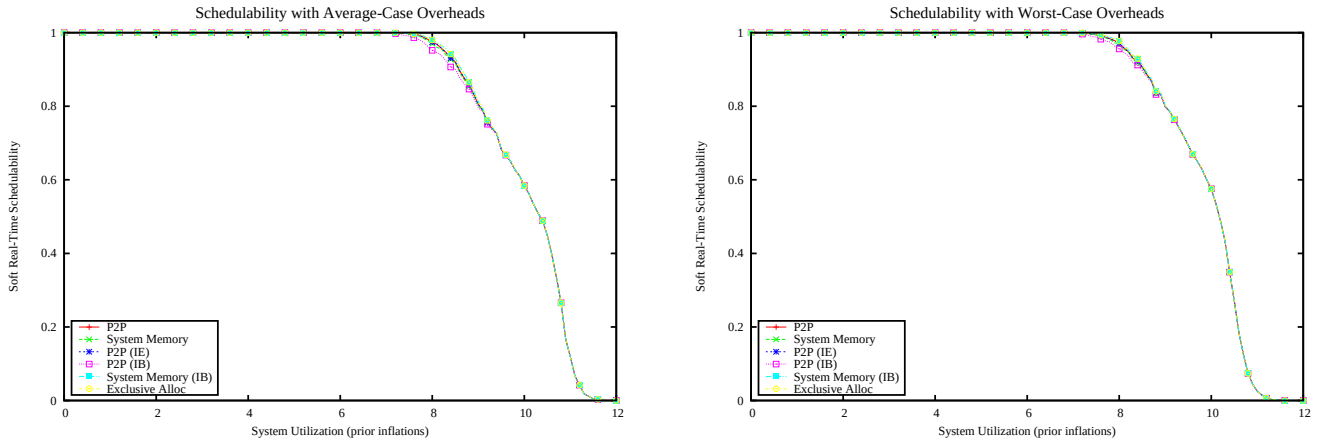

Figure 344: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

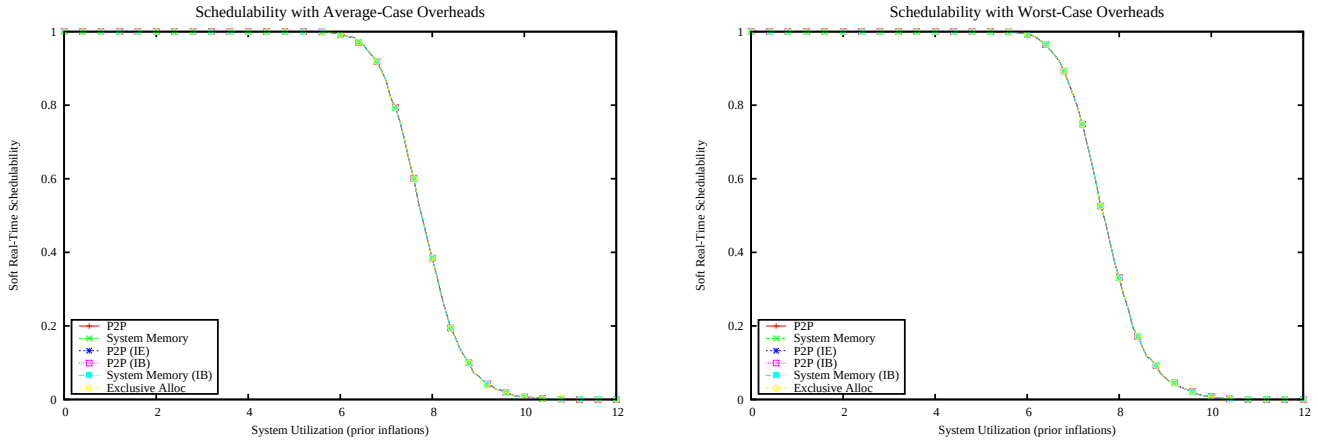

Figure 345: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

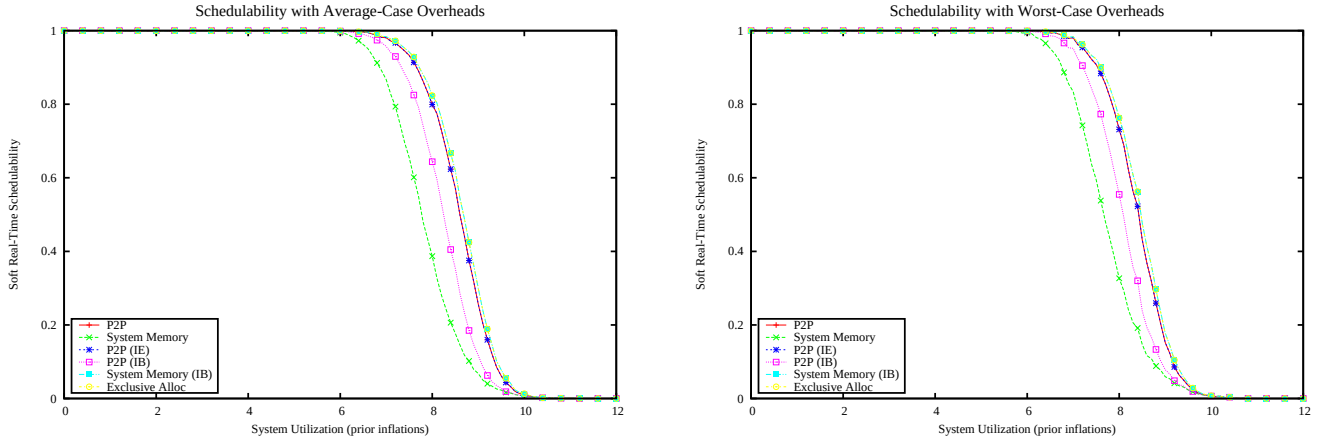

Figure 346: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

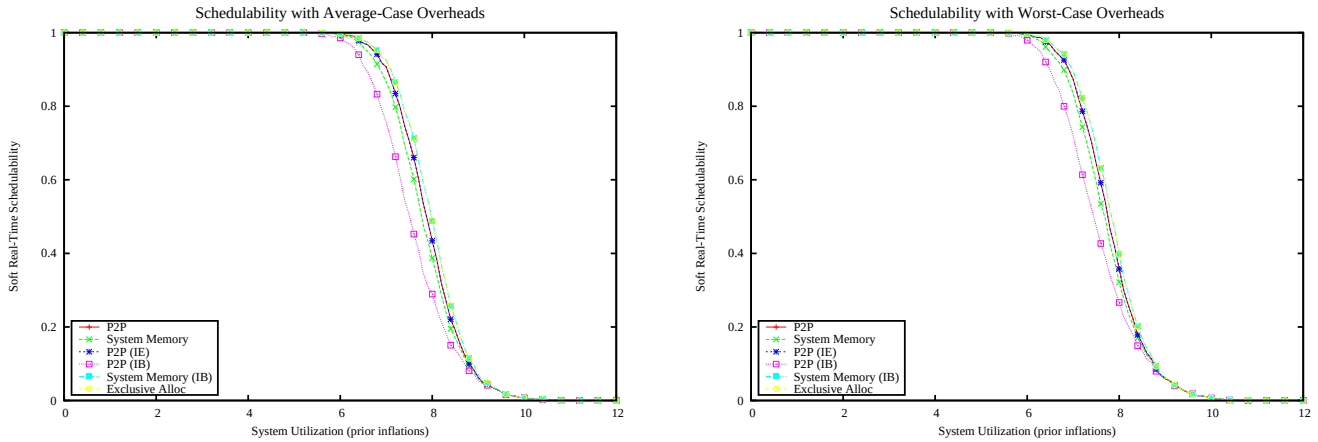

Figure 347: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

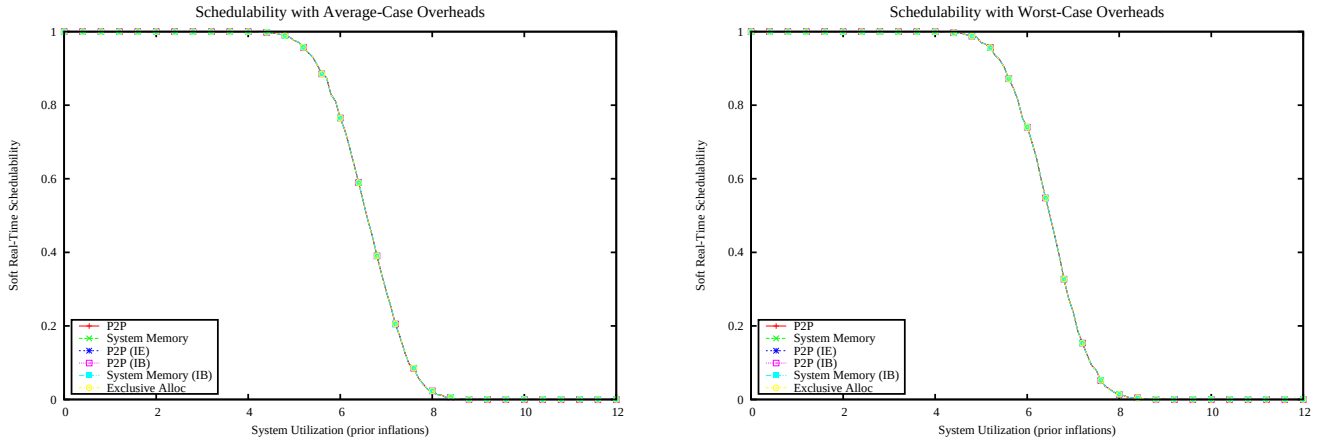

Figure 348: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

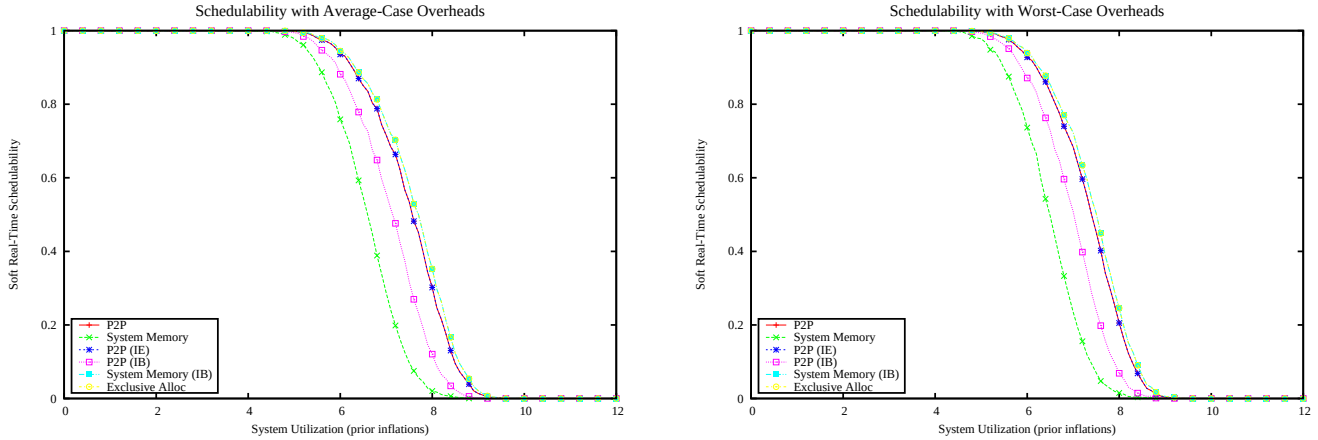

Figure 349: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

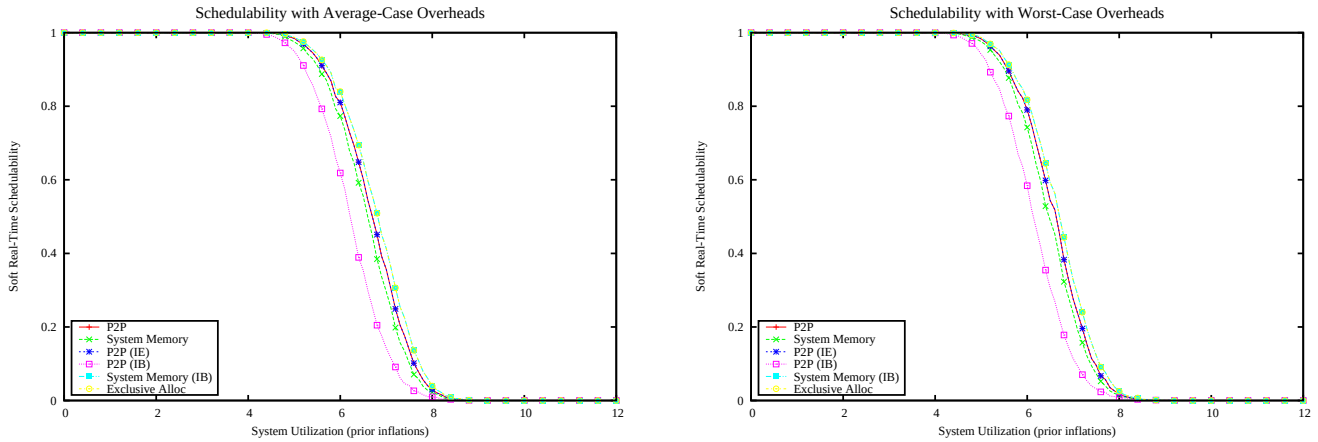

Figure 350: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

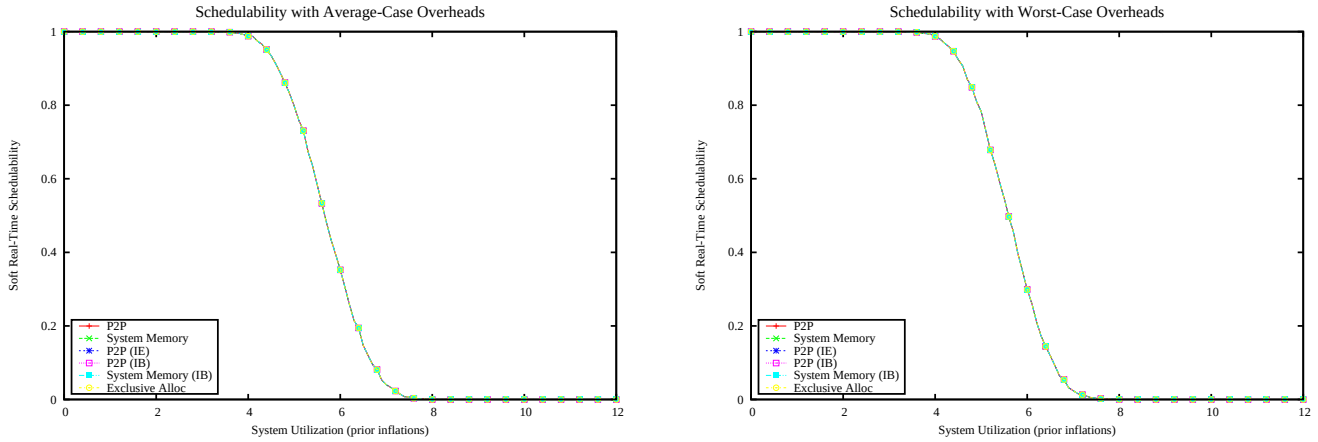

Figure 351: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

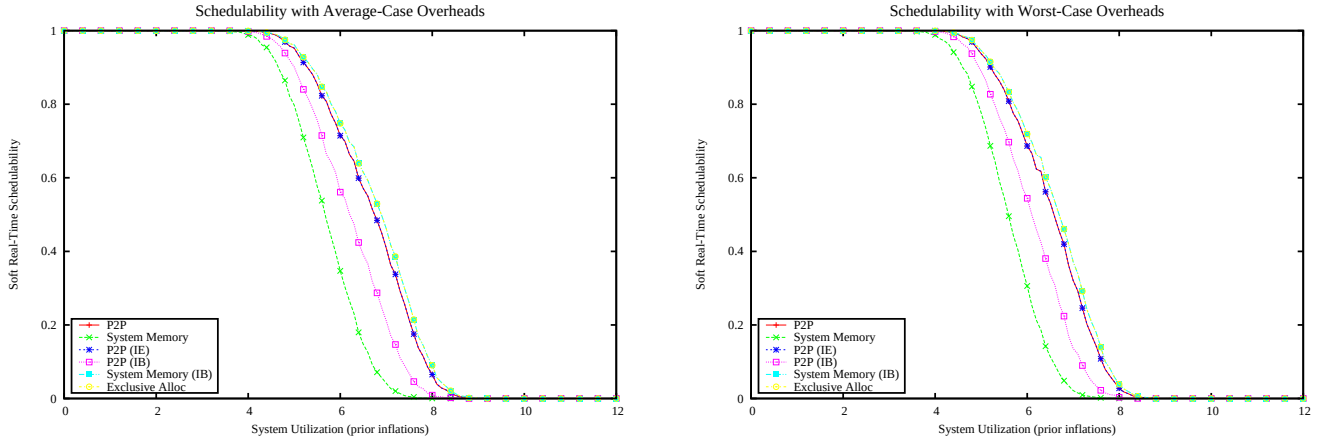

Figure 352: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

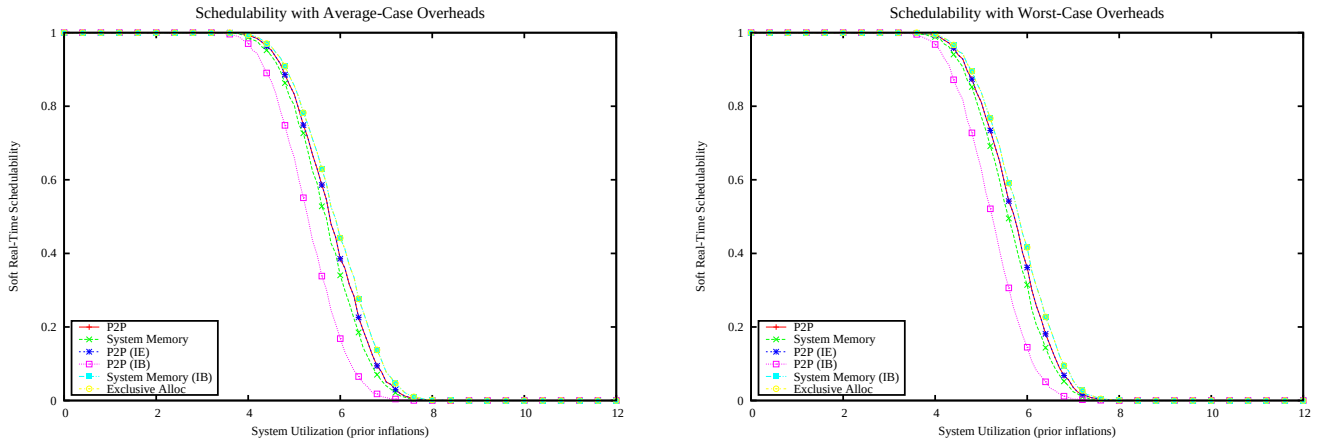

Figure 353: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

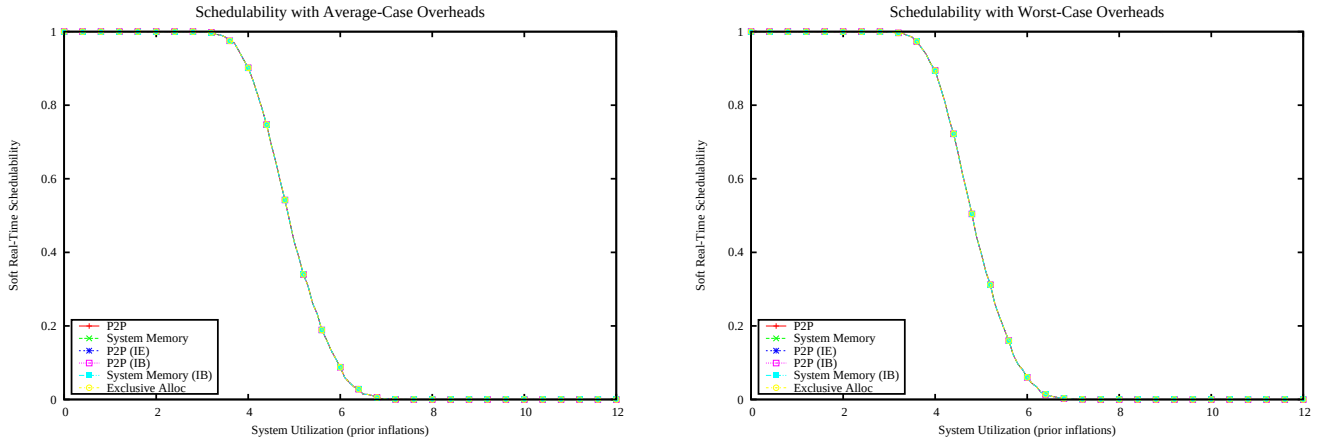

Figure 354: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

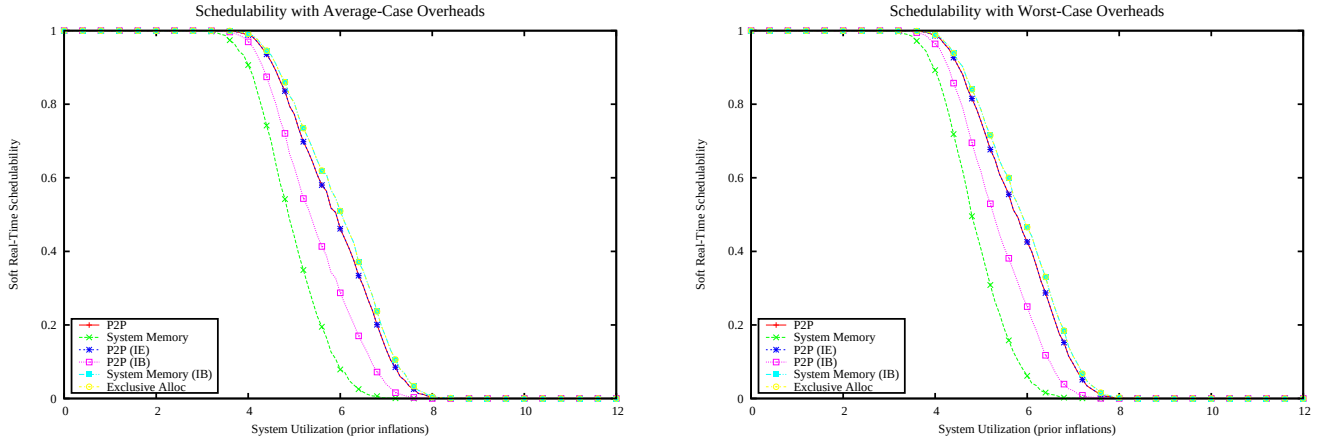

Figure 355: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

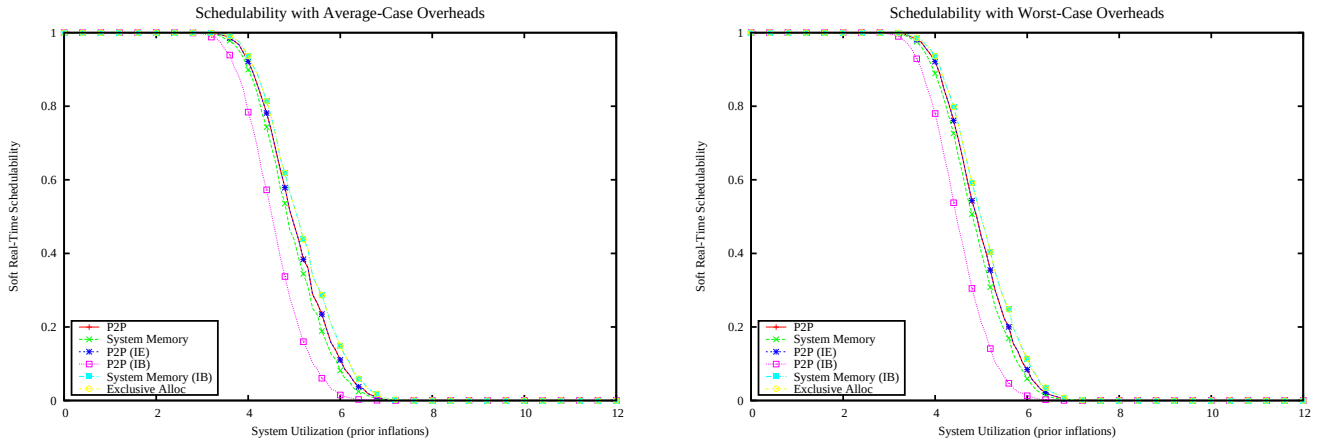

Figure 356: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

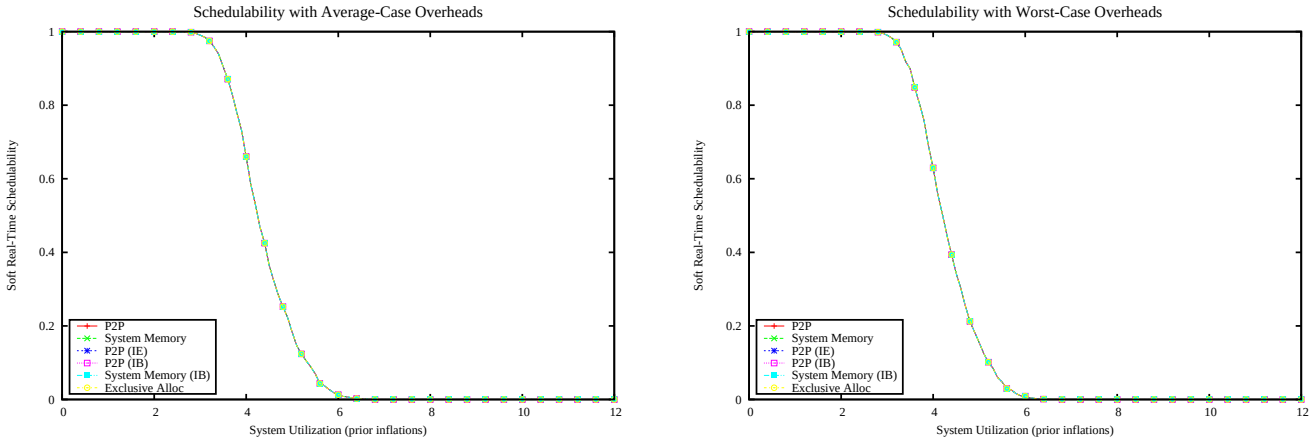

Figure 357: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

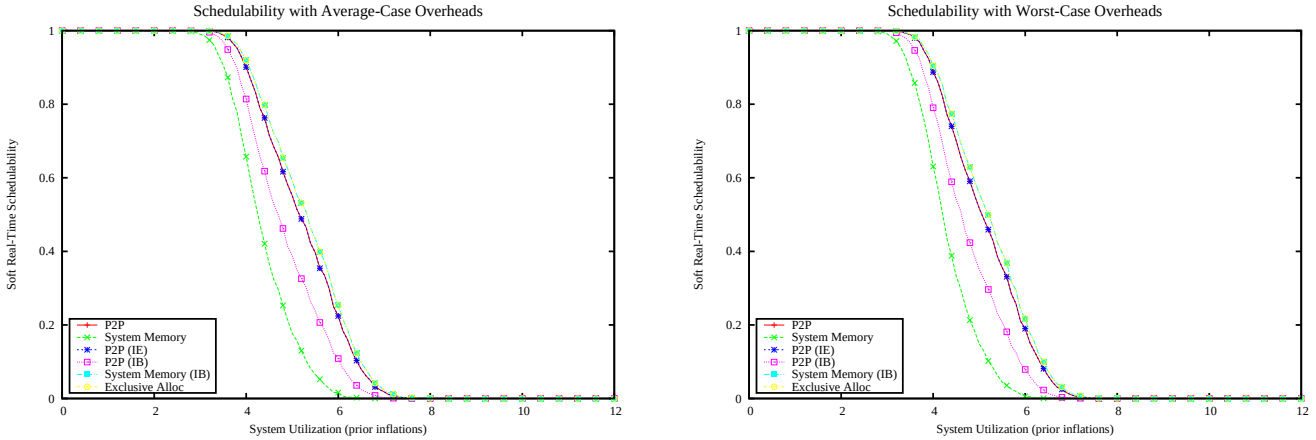

Figure 358: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

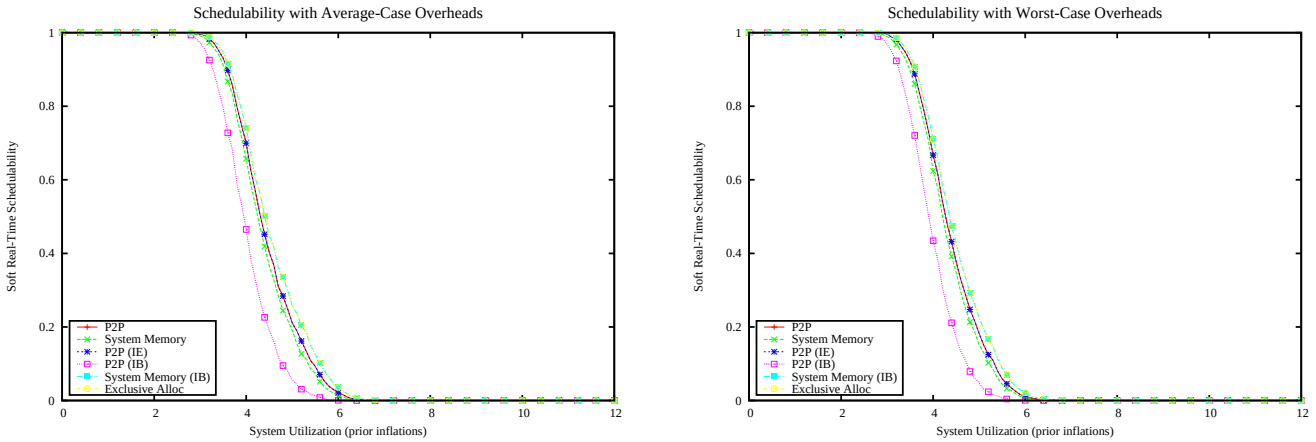

Figure 359: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

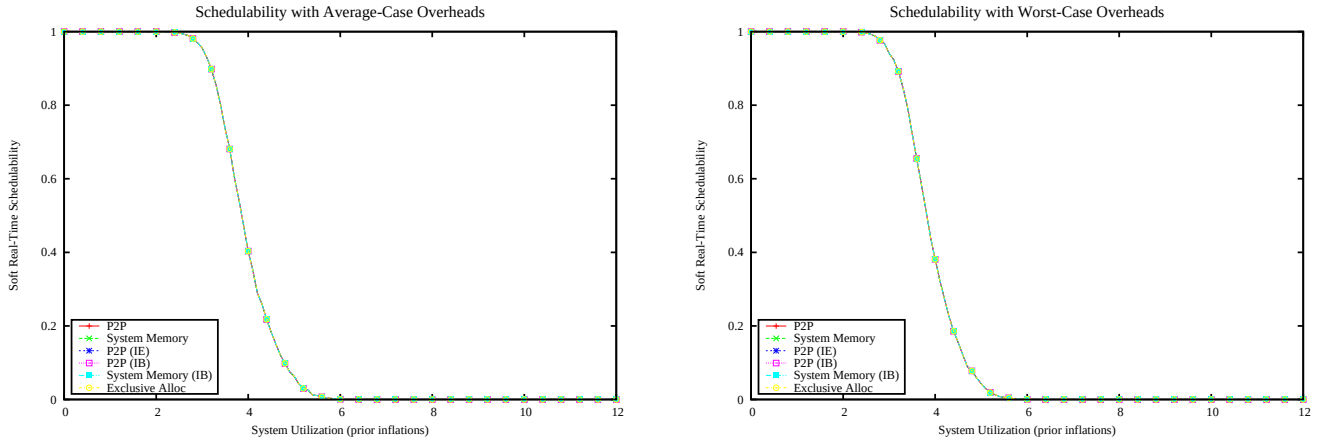

Figure 360: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

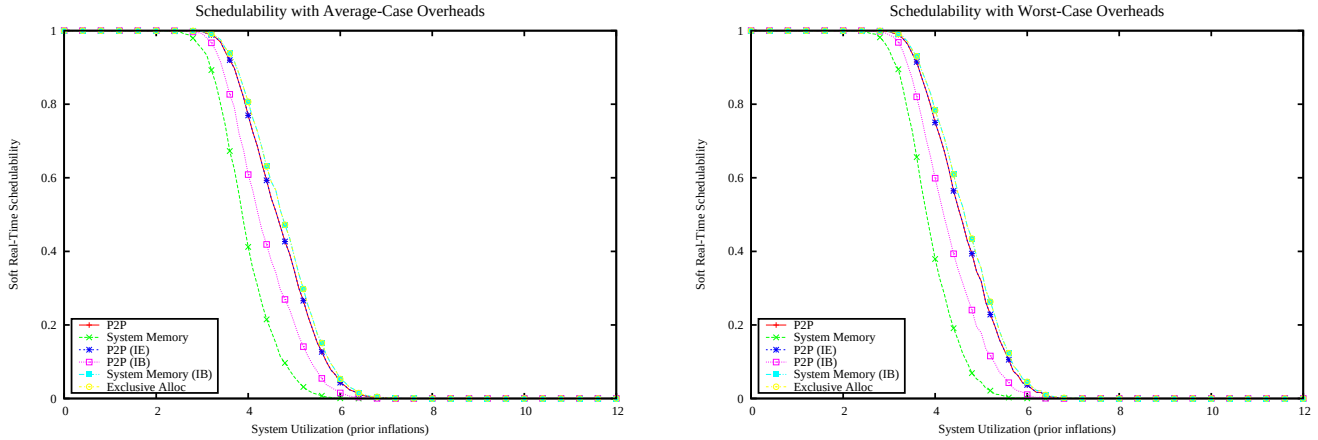

Figure 361: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

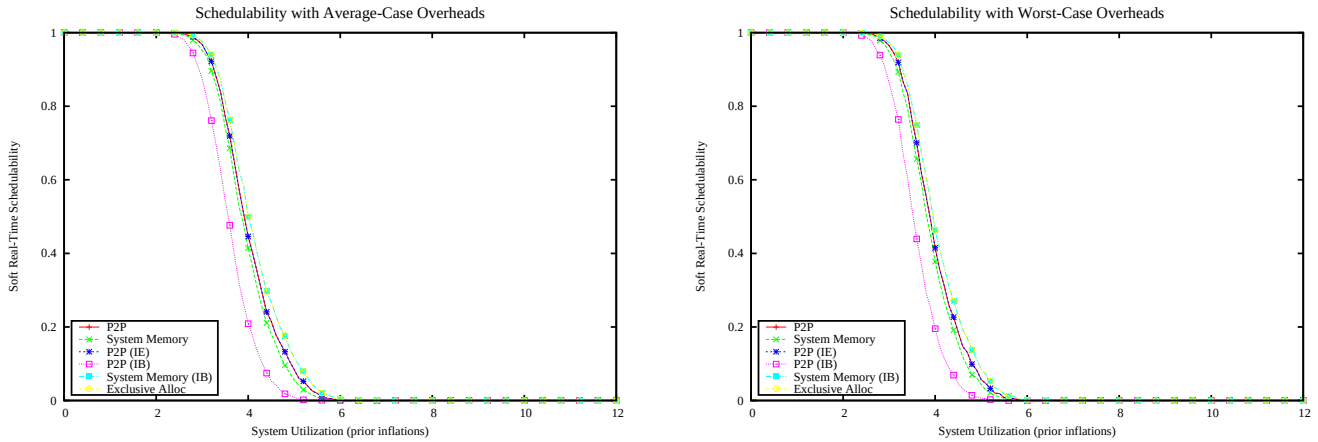

Figure 362: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

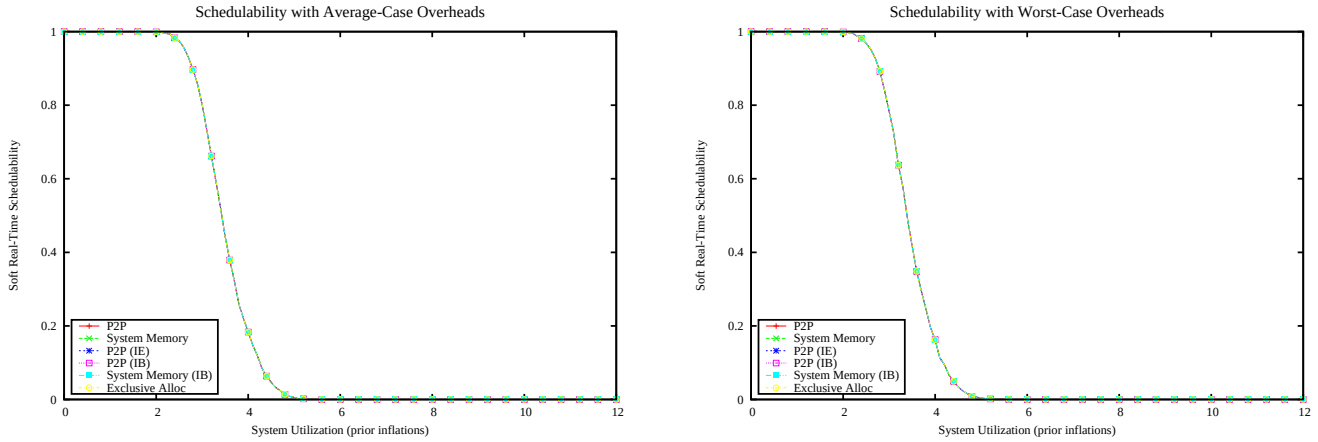

Figure 363: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

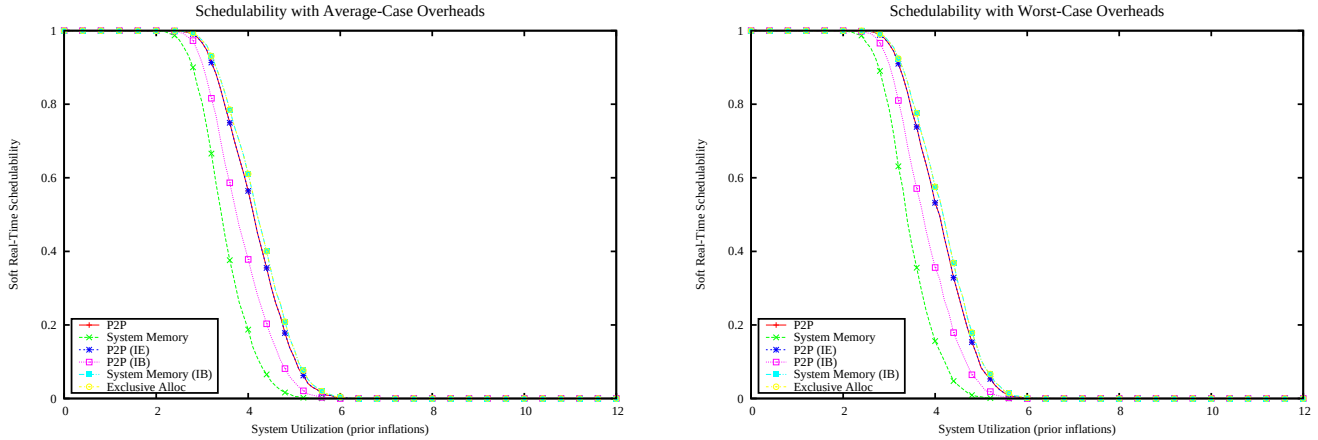

Figure 364: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

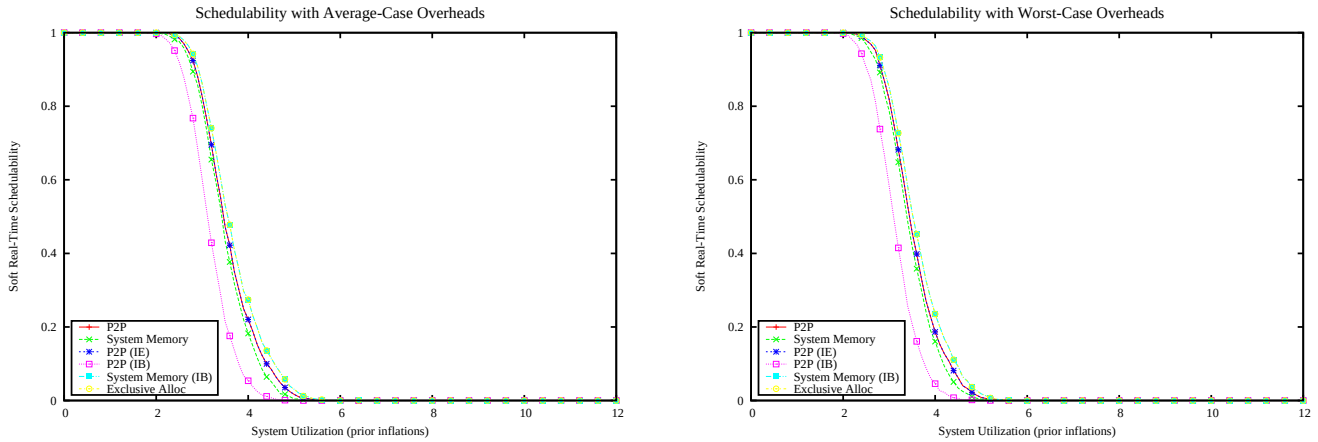

Figure 365: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

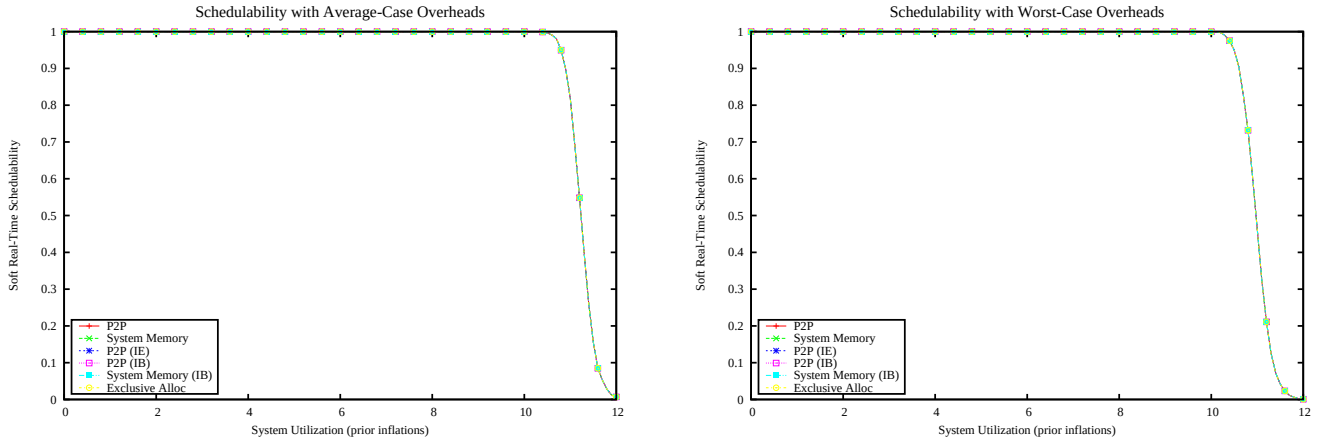

Figure 366: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

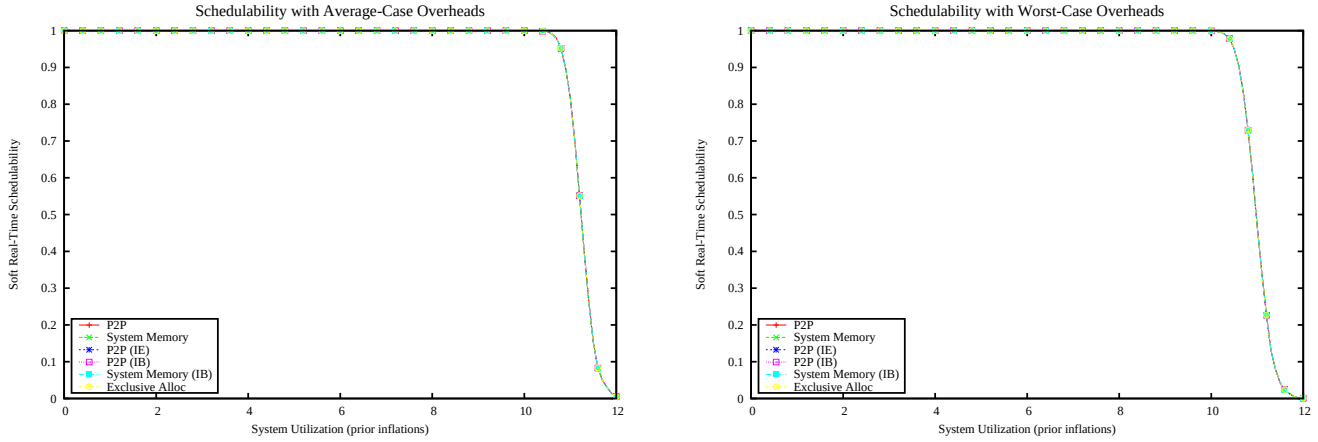

Figure 367: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

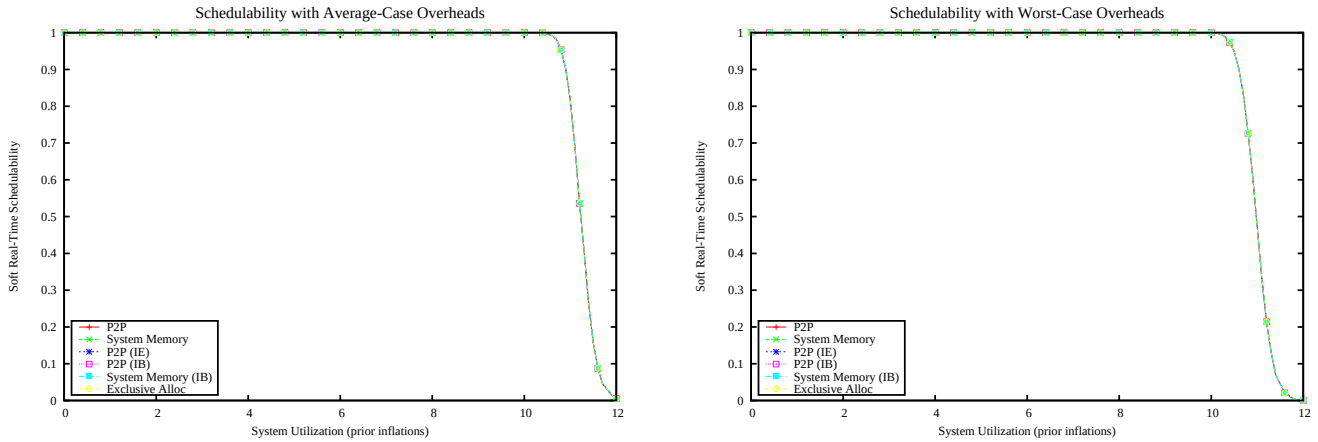

Figure 368: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

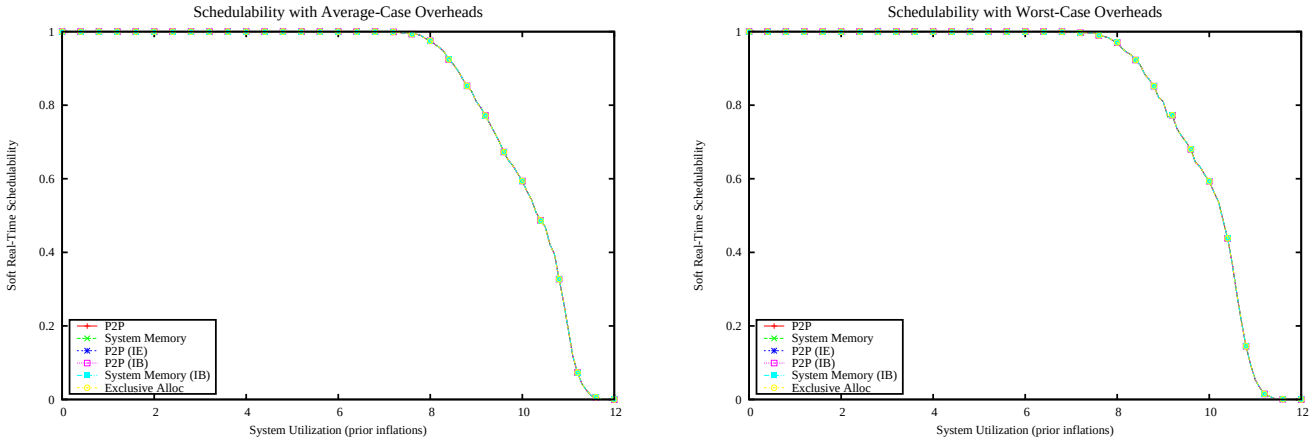

Figure 369: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

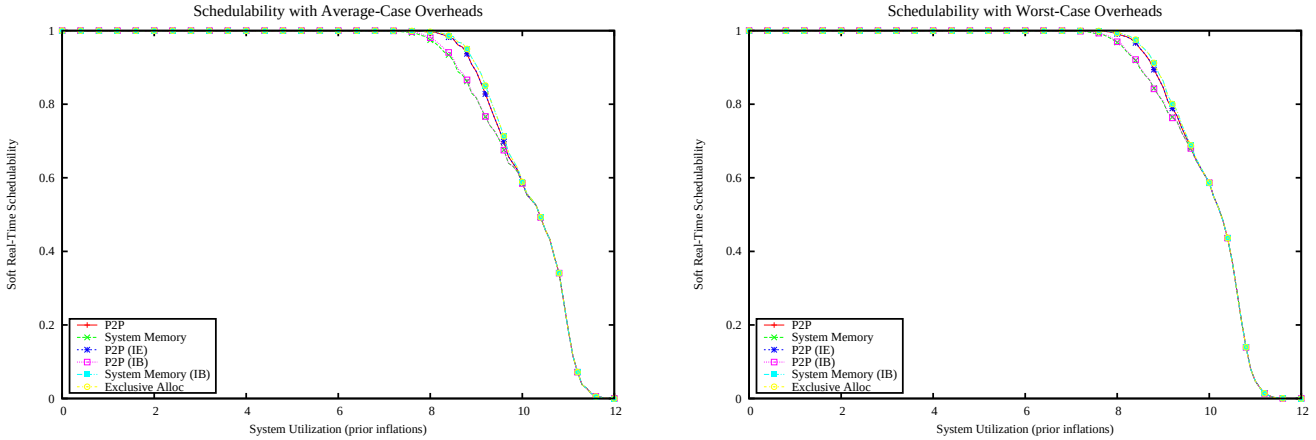

Figure 370: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

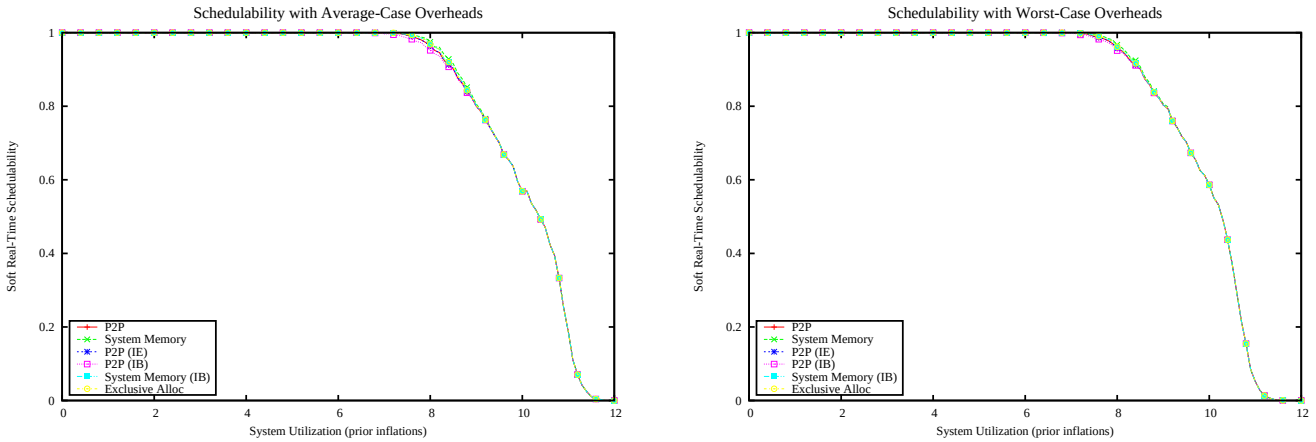

Figure 371: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

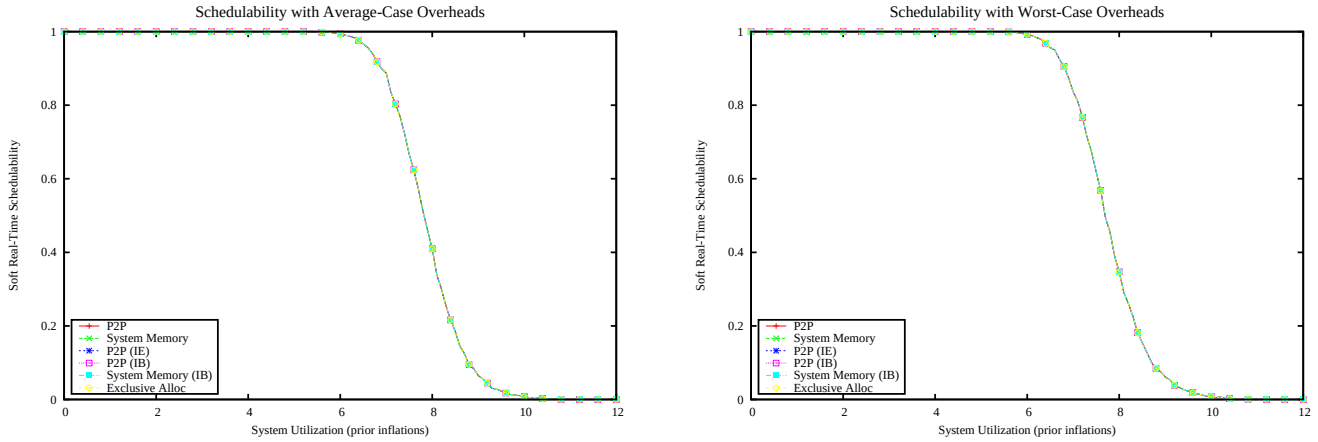

Figure 372: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

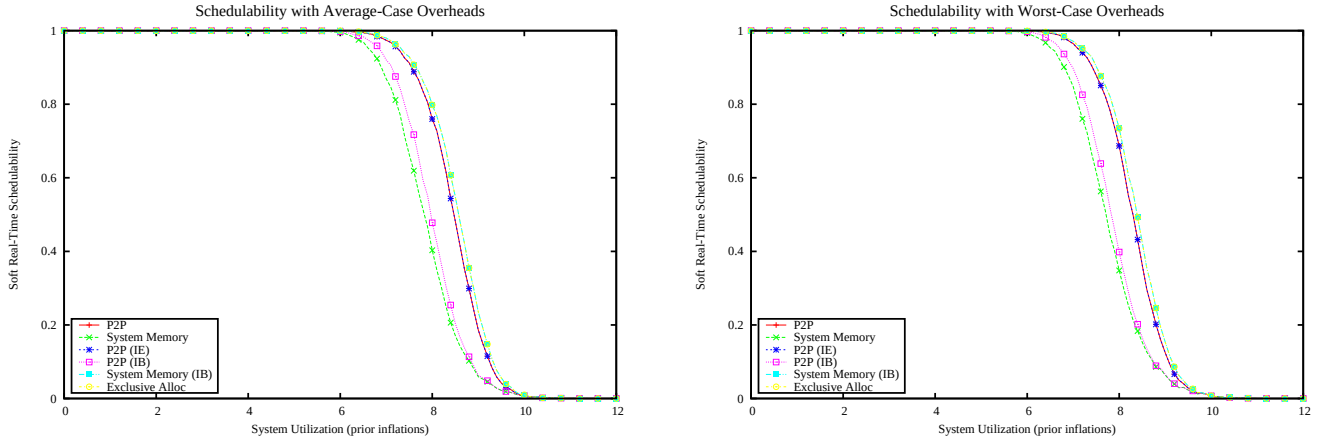

Figure 373: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

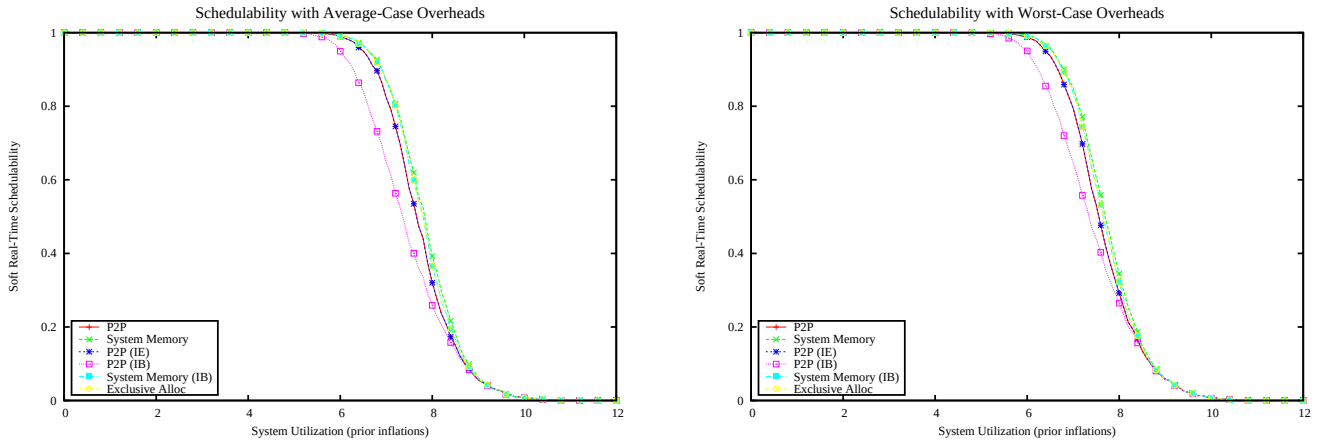

Figure 374: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

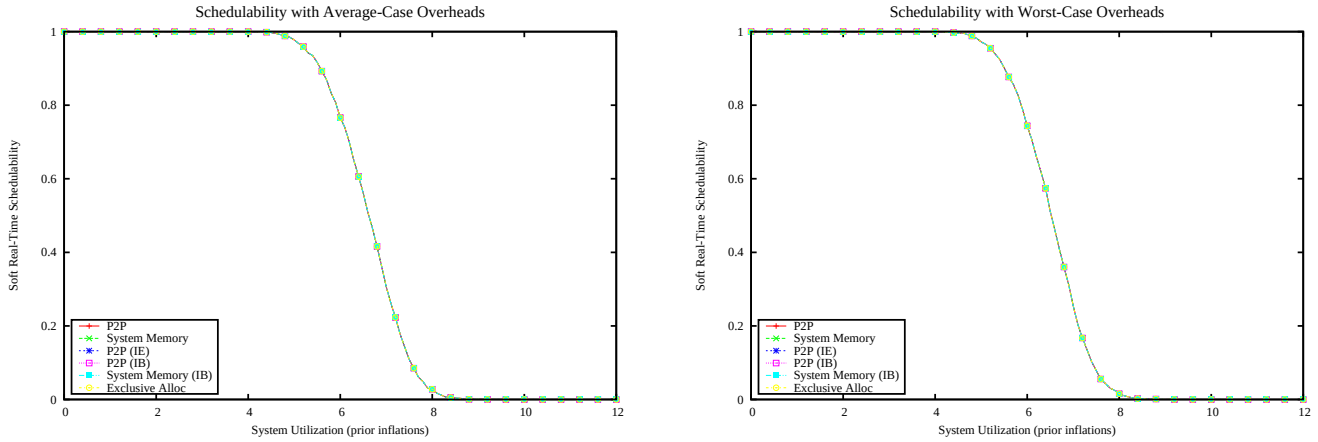

Figure 375: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

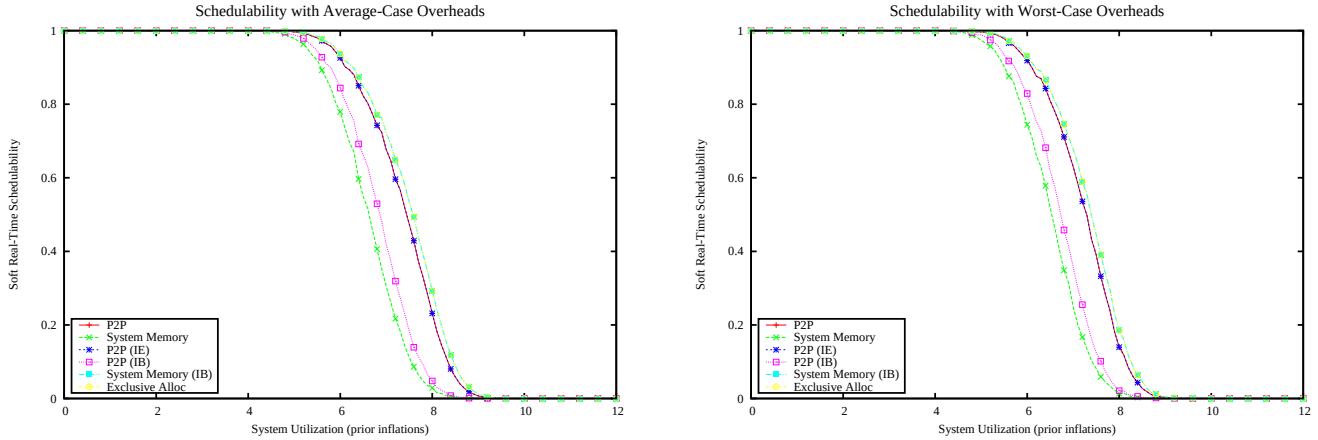

Figure 376: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

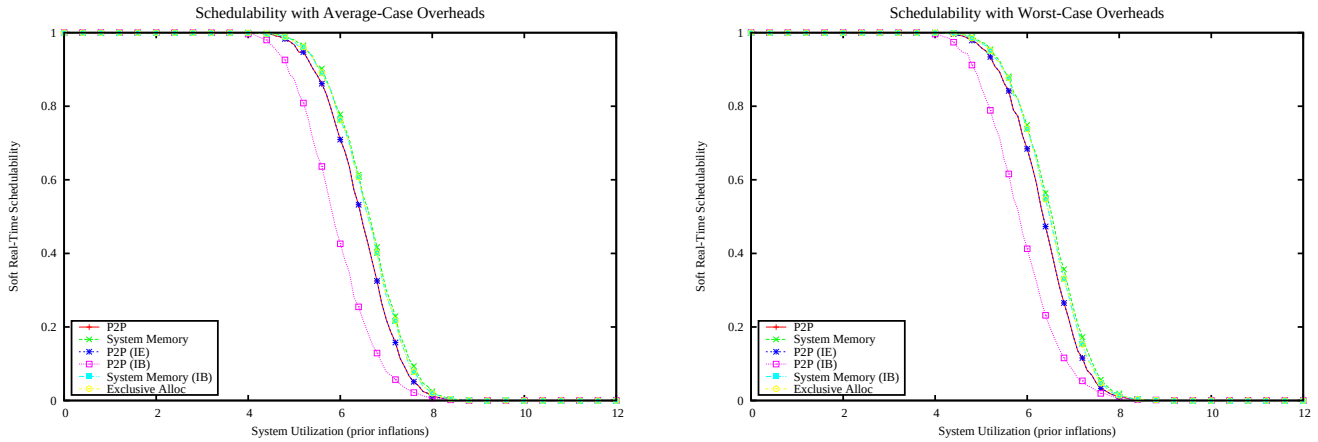

Figure 377: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

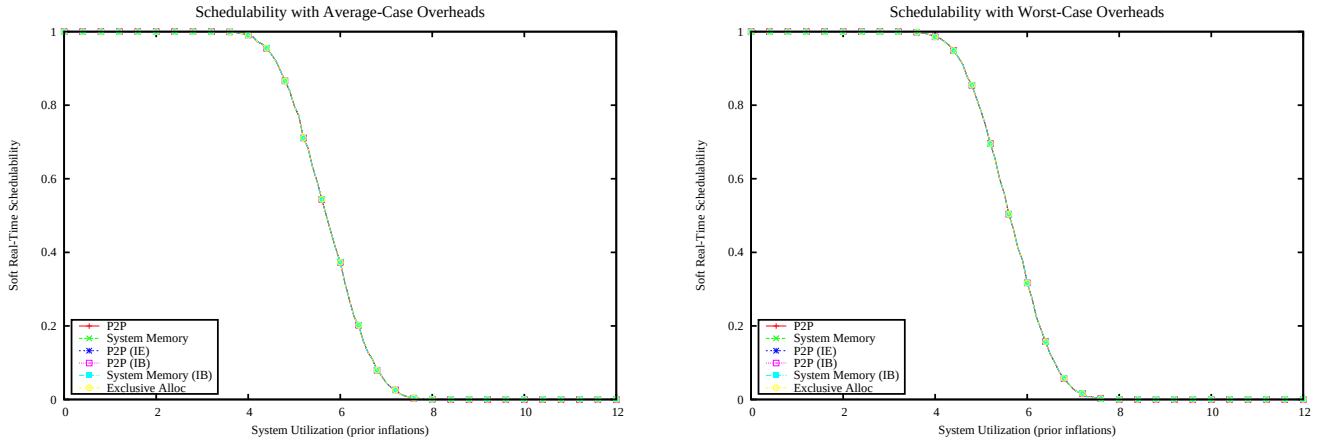

Figure 378: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

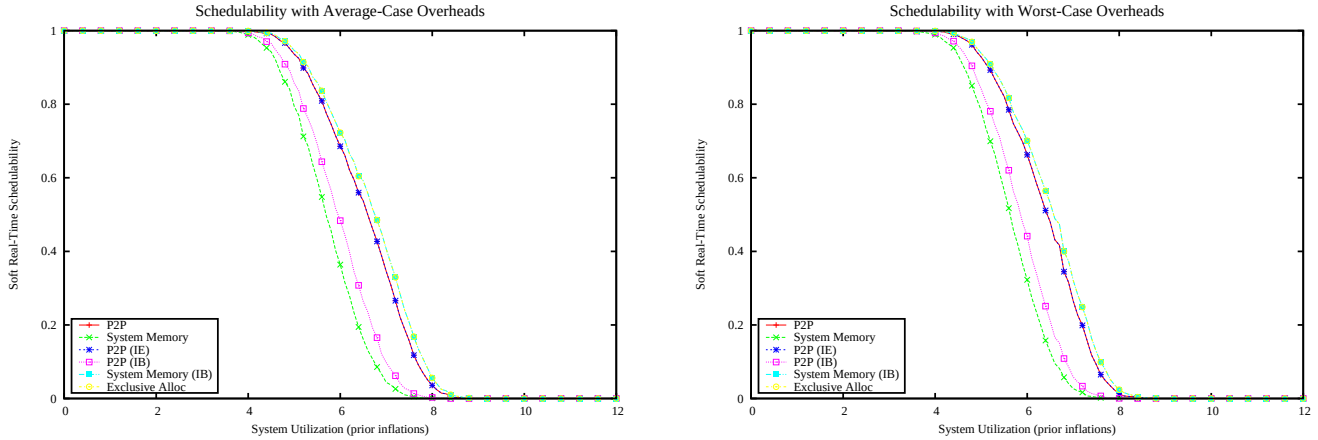

Figure 379: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

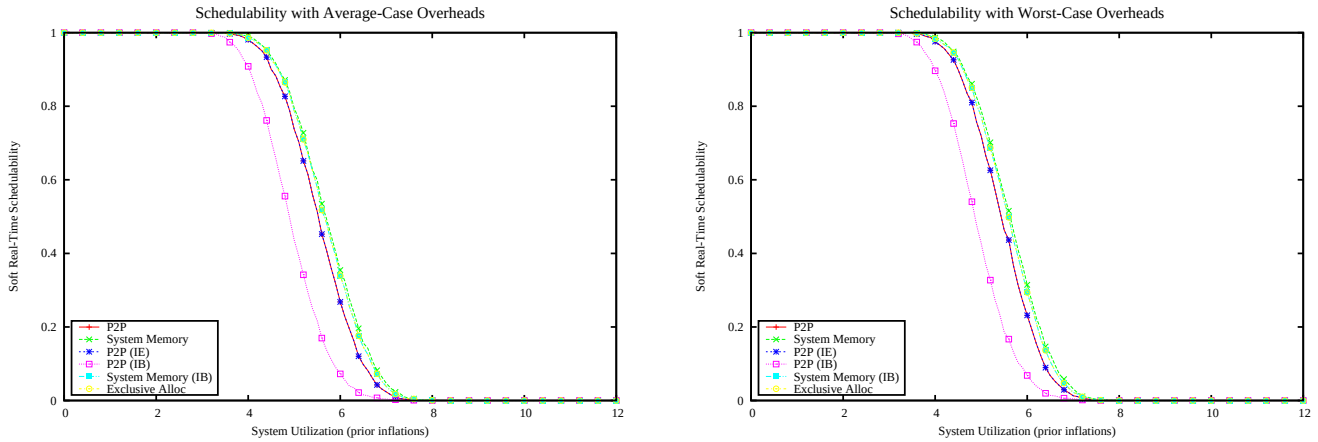

Figure 380: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

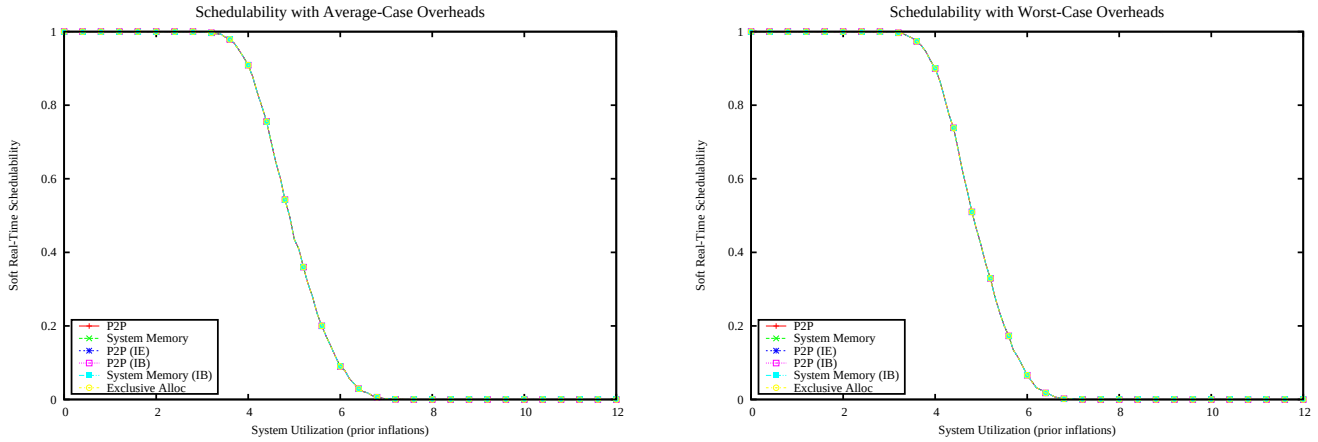

Figure 381: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

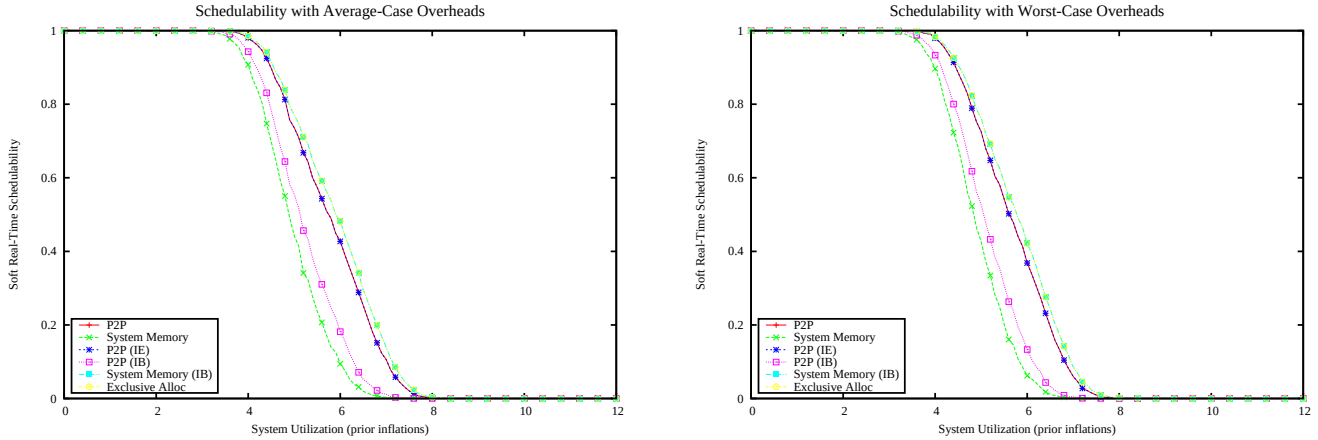

Figure 382: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

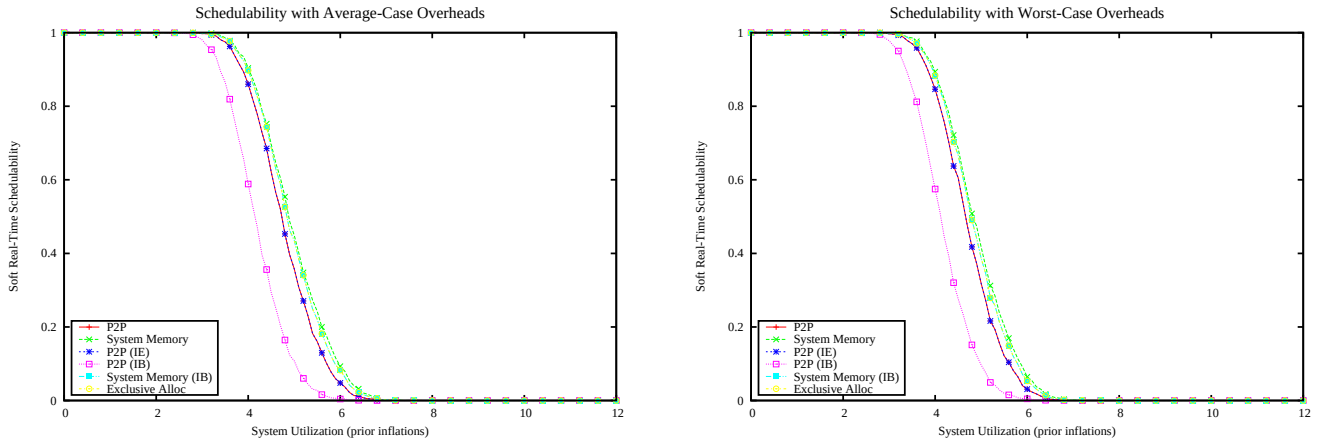

Figure 383: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

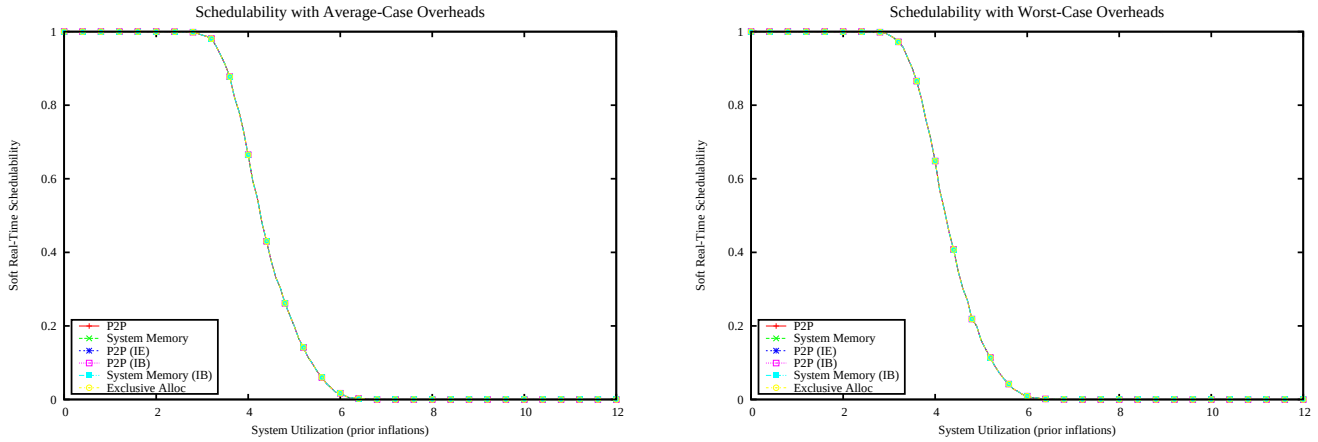

Figure 384: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

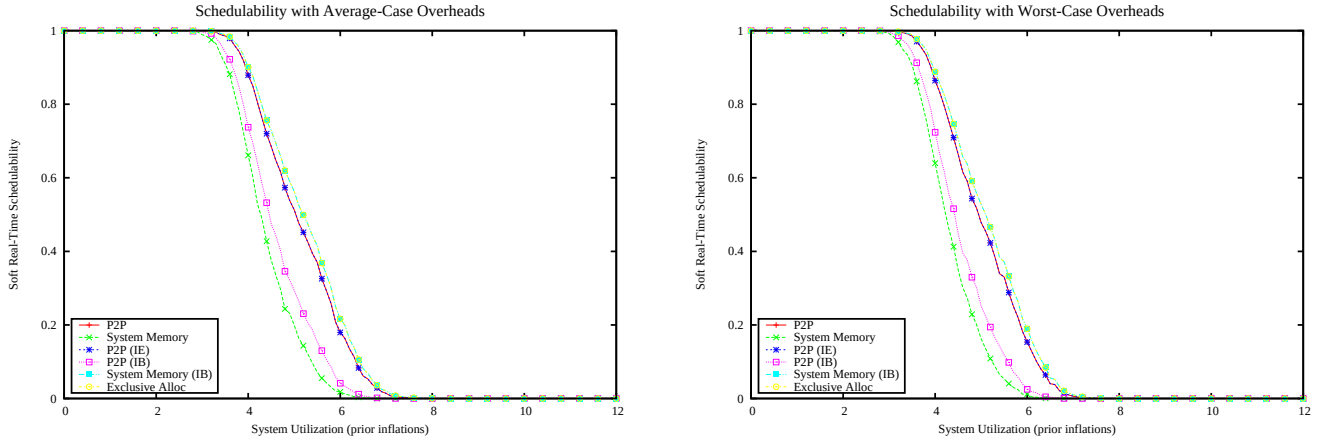

Figure 385: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

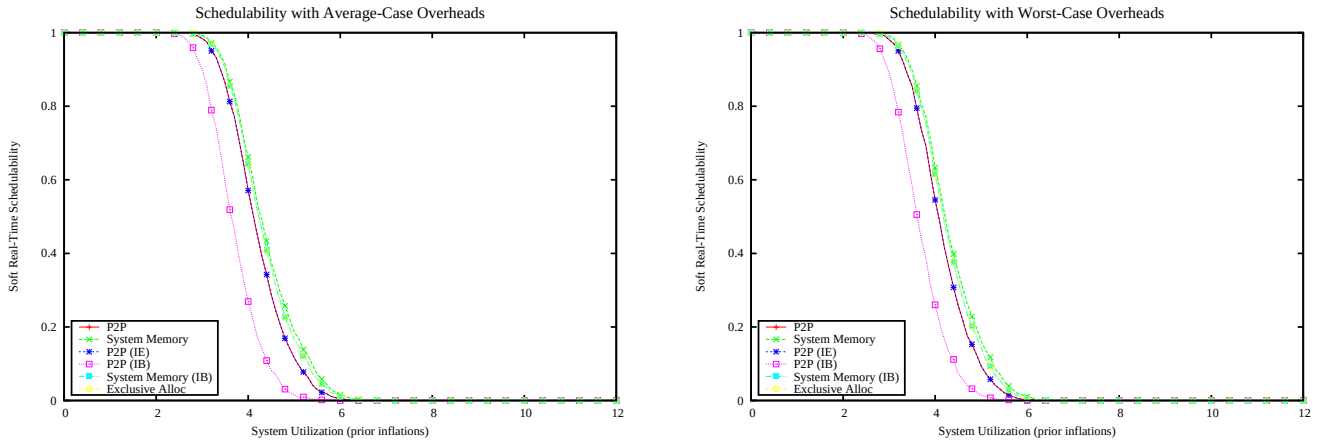

Figure 386: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

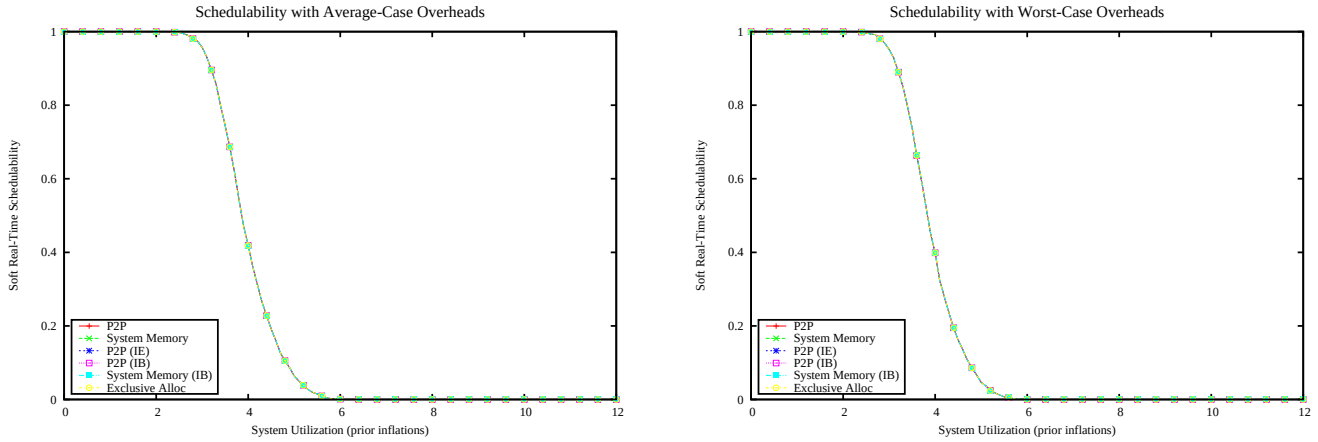

Figure 387: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

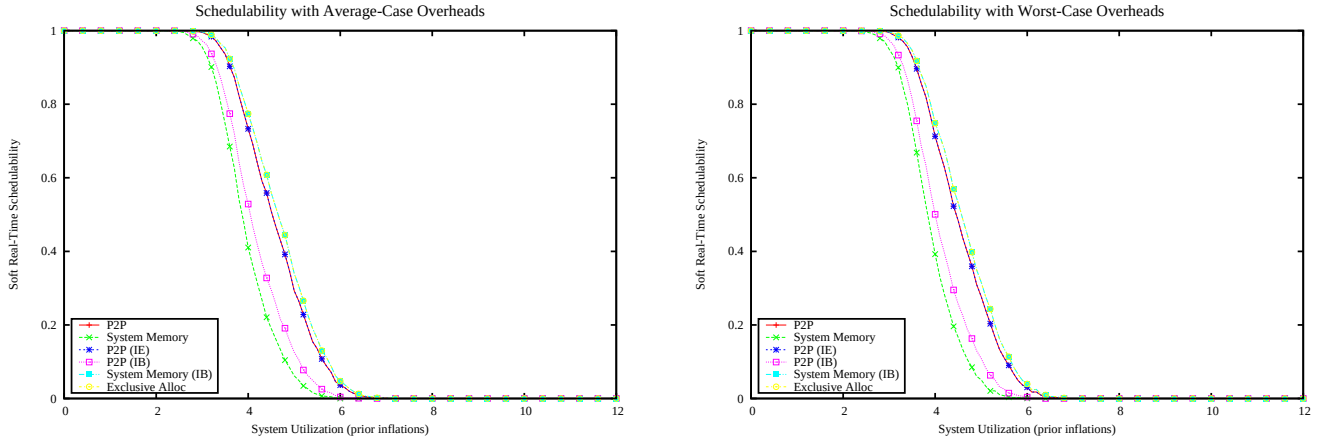

Figure 388: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

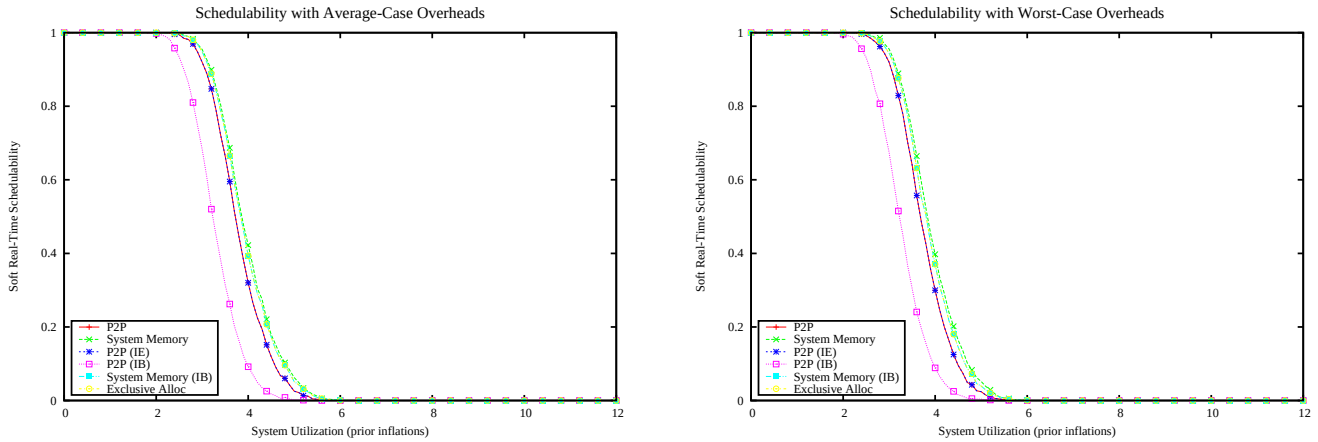

Figure 389: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

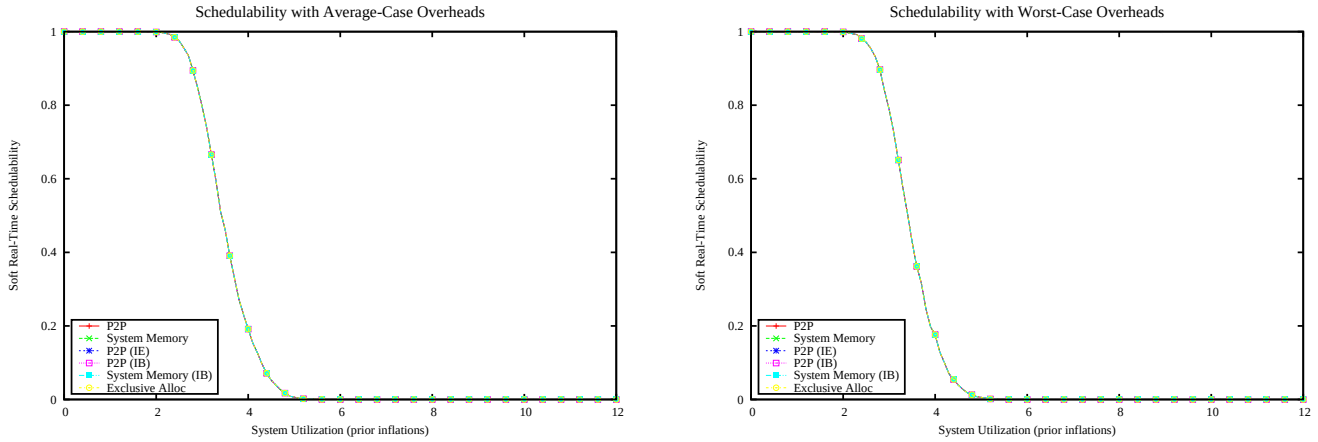

Figure 390: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

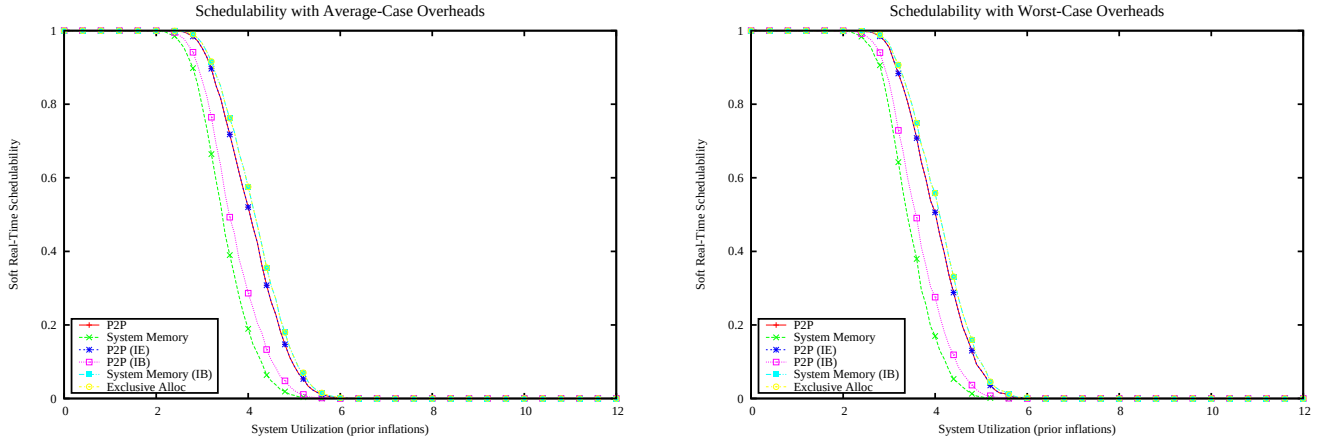

Figure 391: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

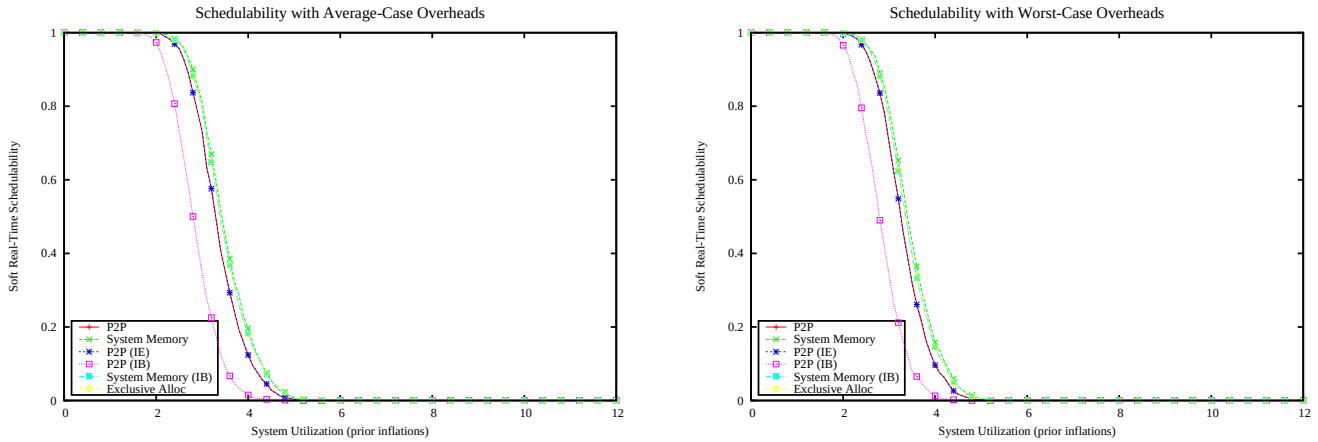

Figure 392: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

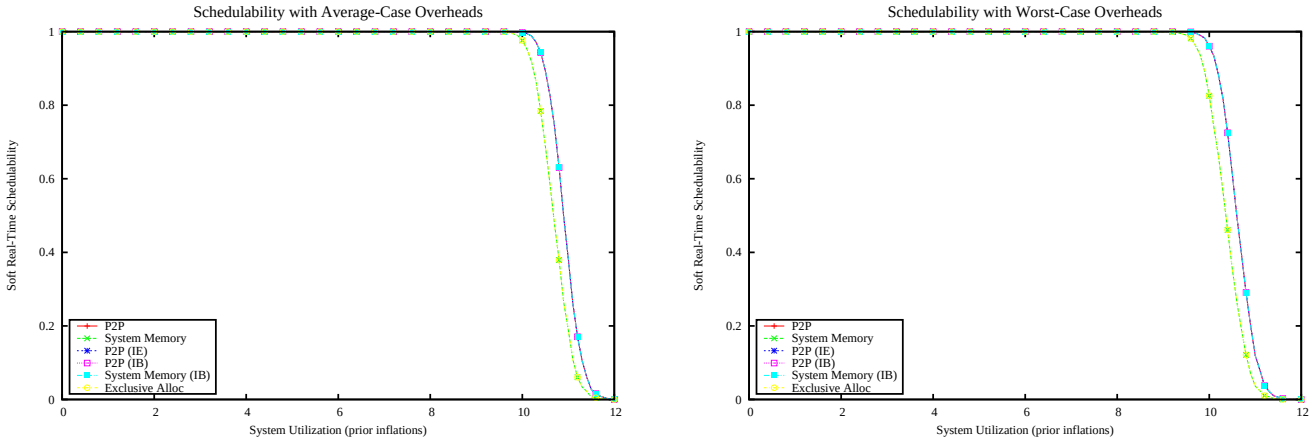

Figure 393: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

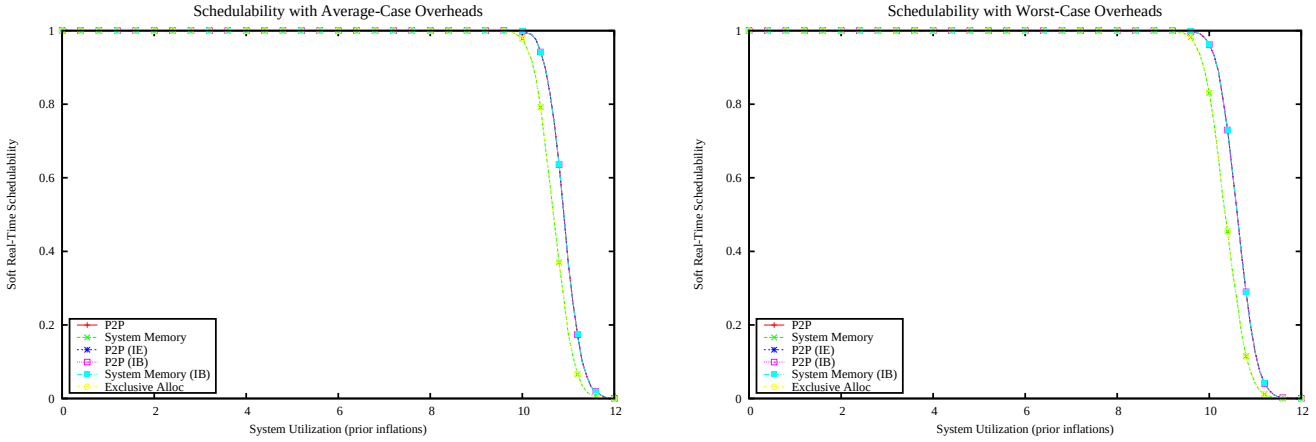

Figure 394: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

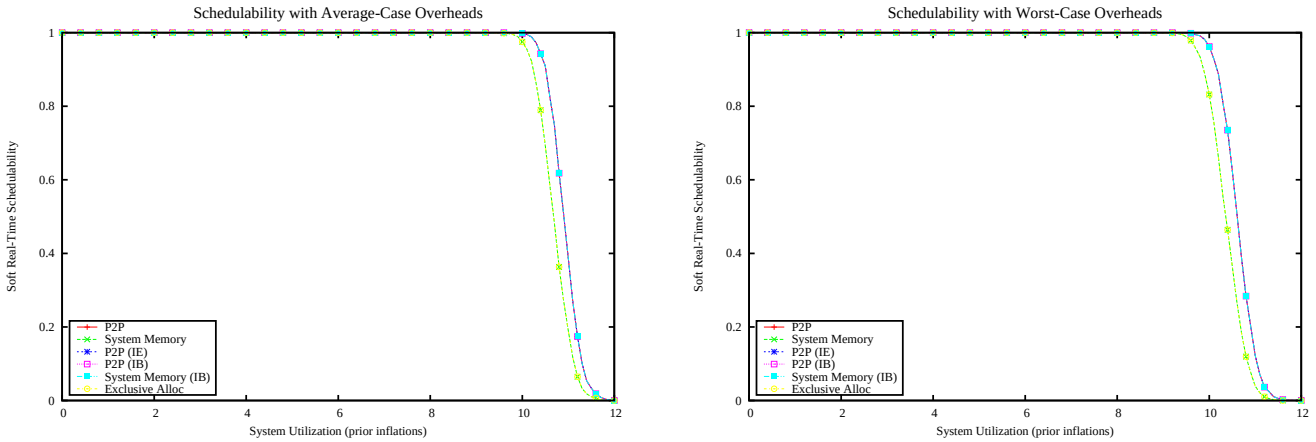

Figure 395: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

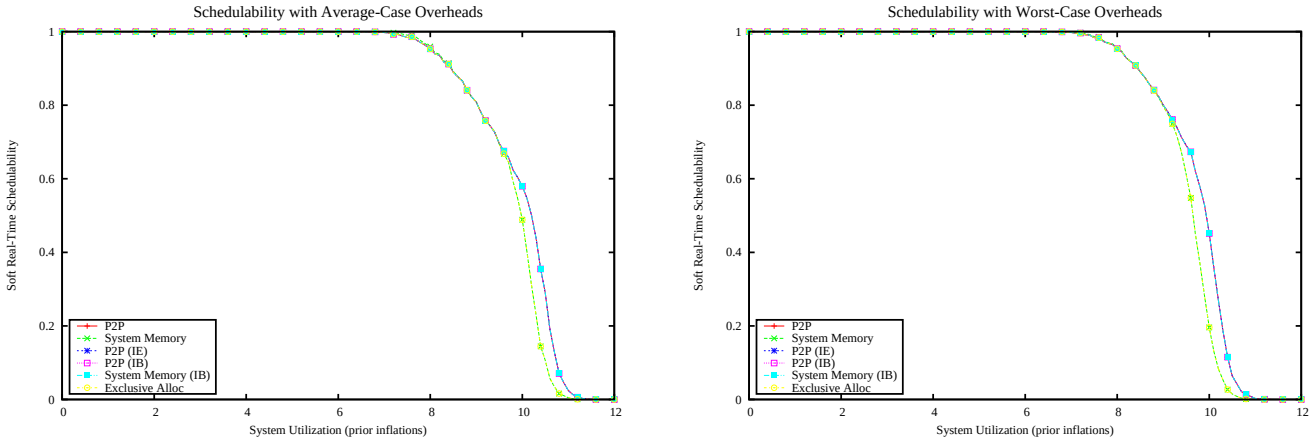

Figure 396: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

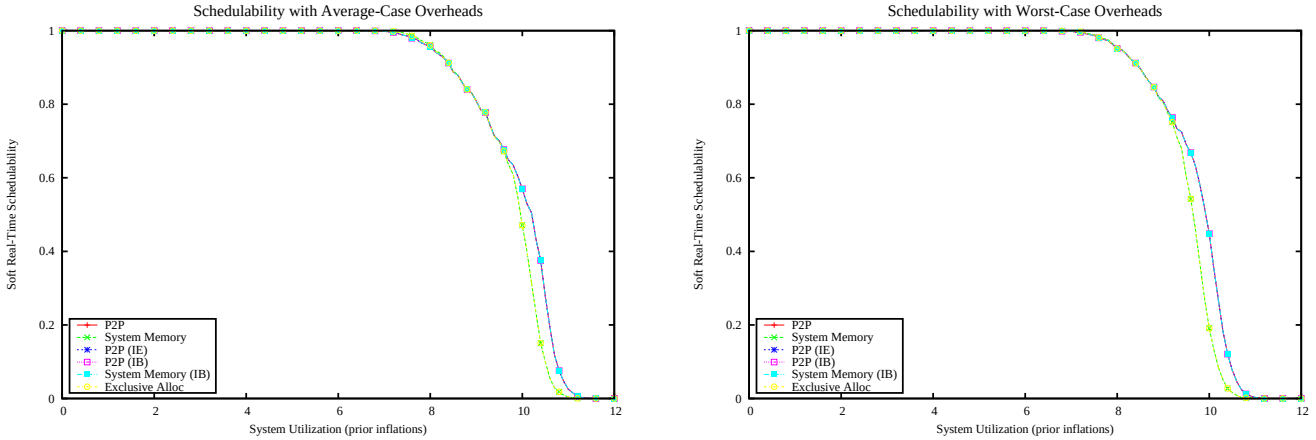

Figure 397: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

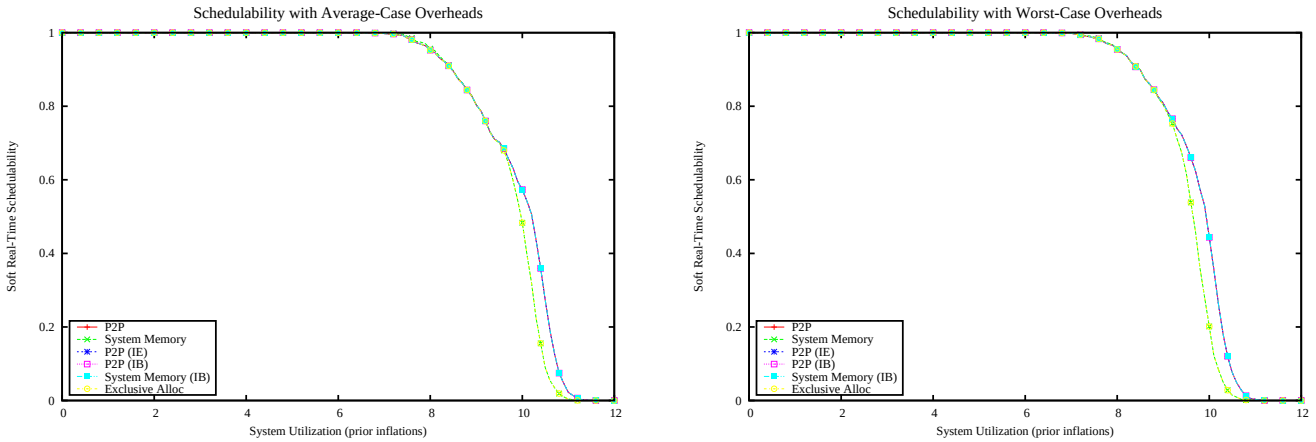

Figure 398: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

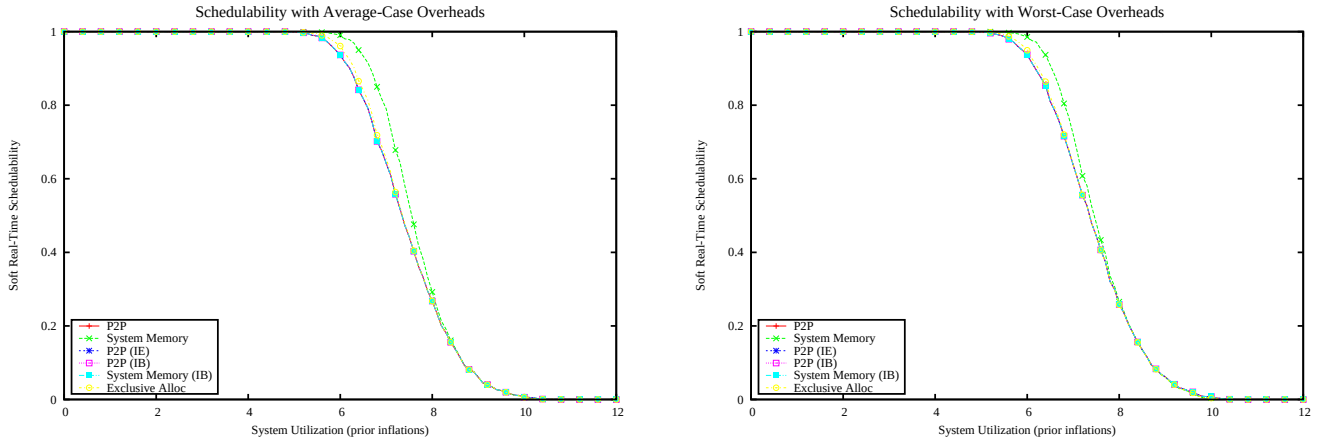

Figure 399: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

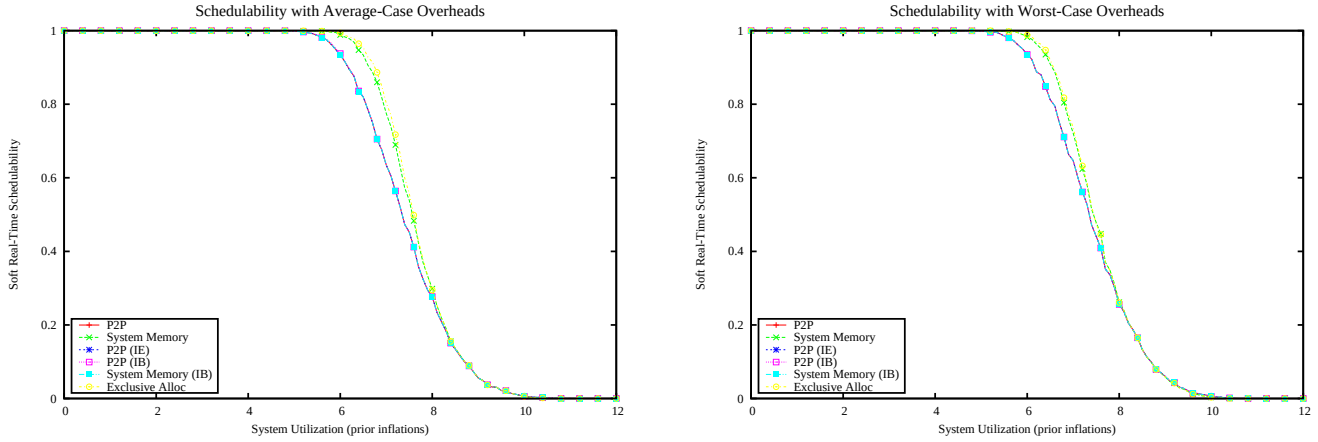

Figure 400: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

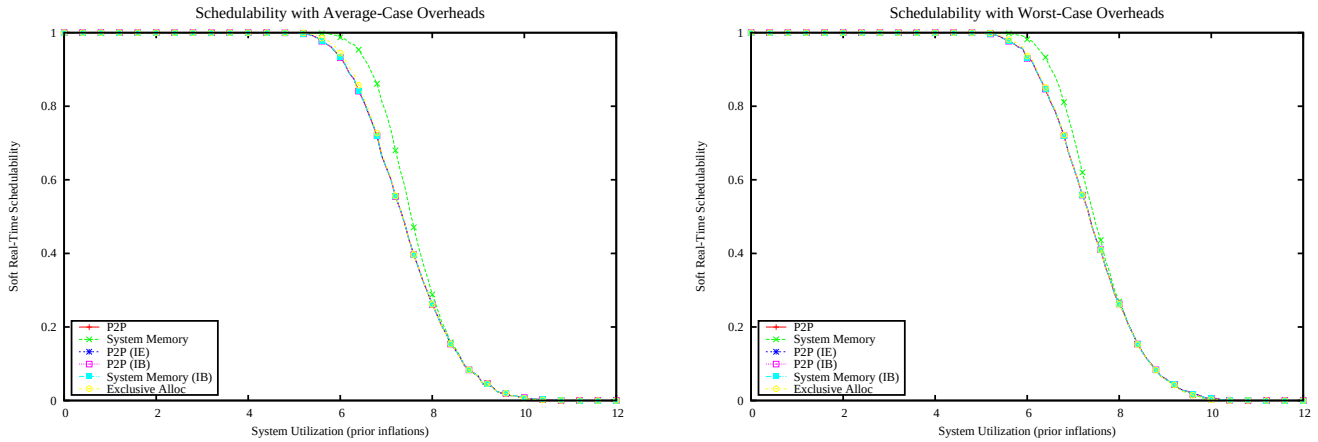

Figure 401: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

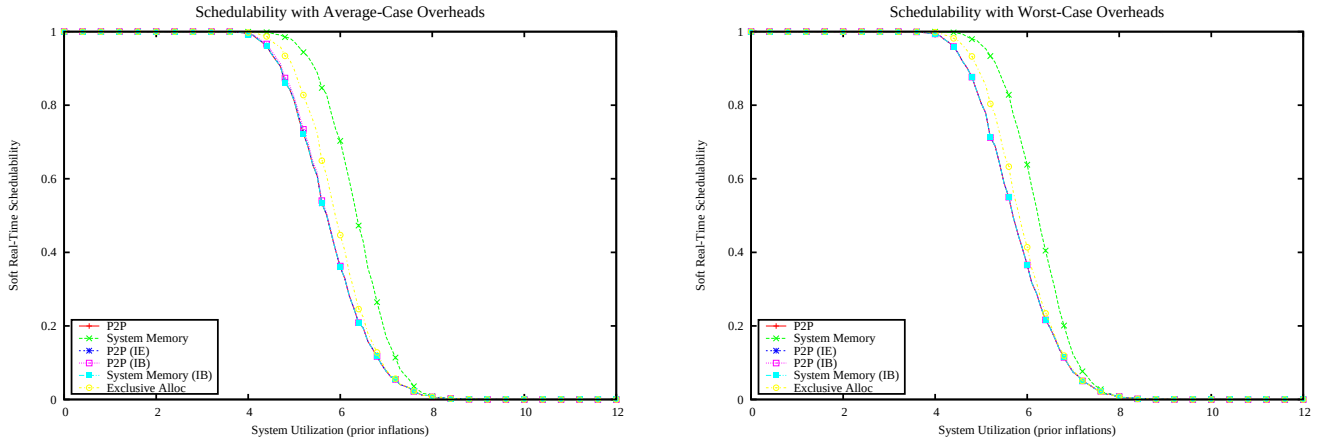

Figure 402: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

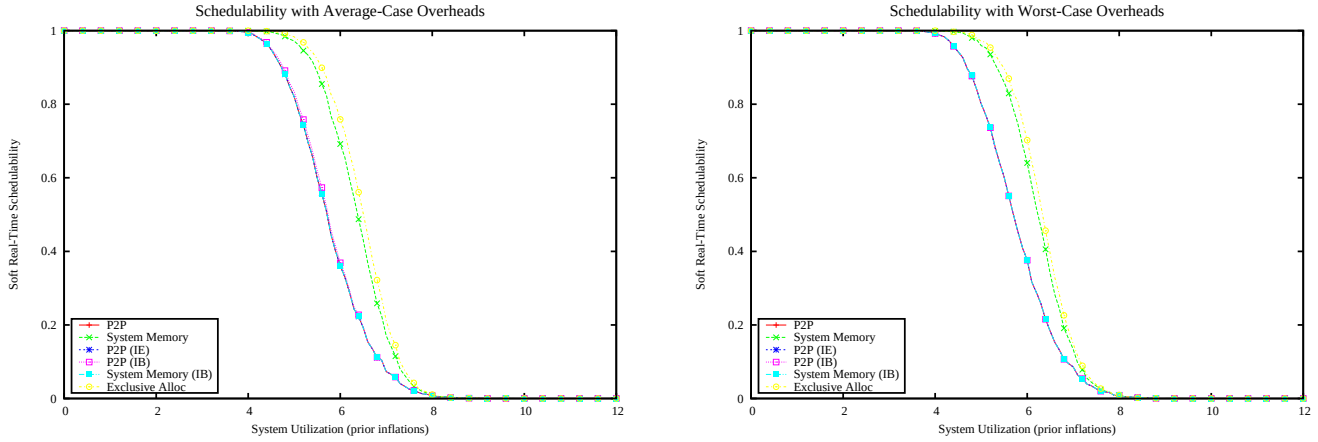

Figure 403: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

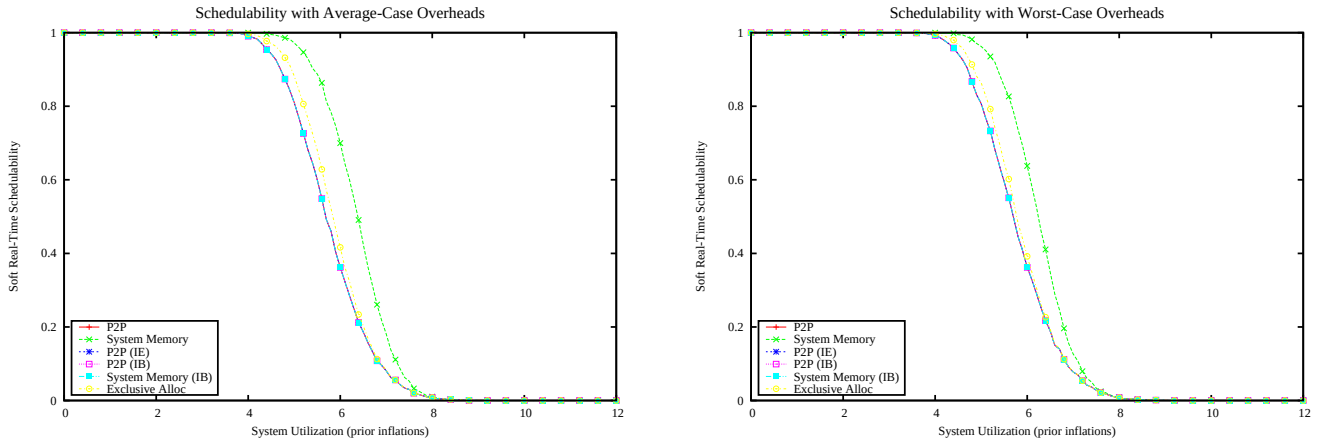

Figure 404: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

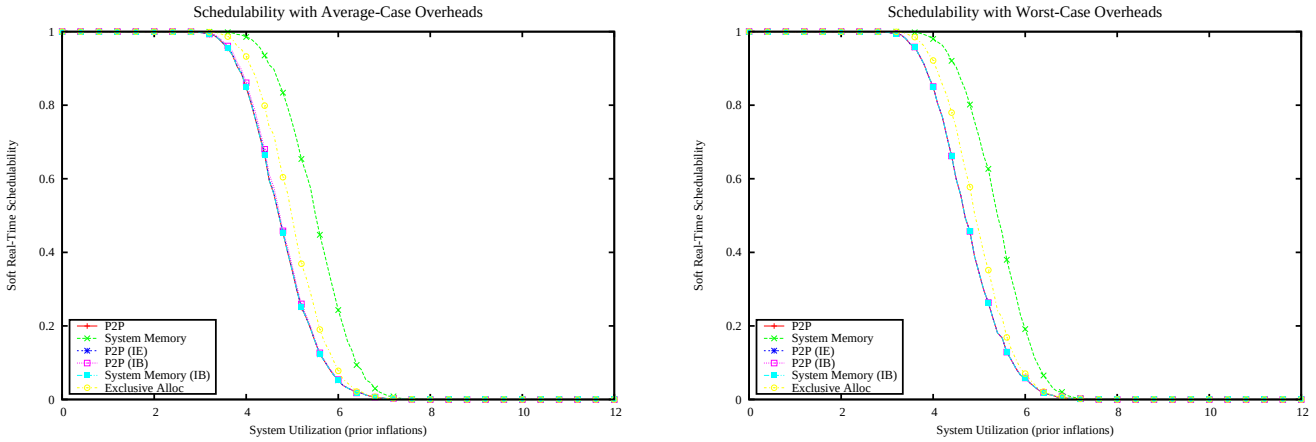

Figure 405: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

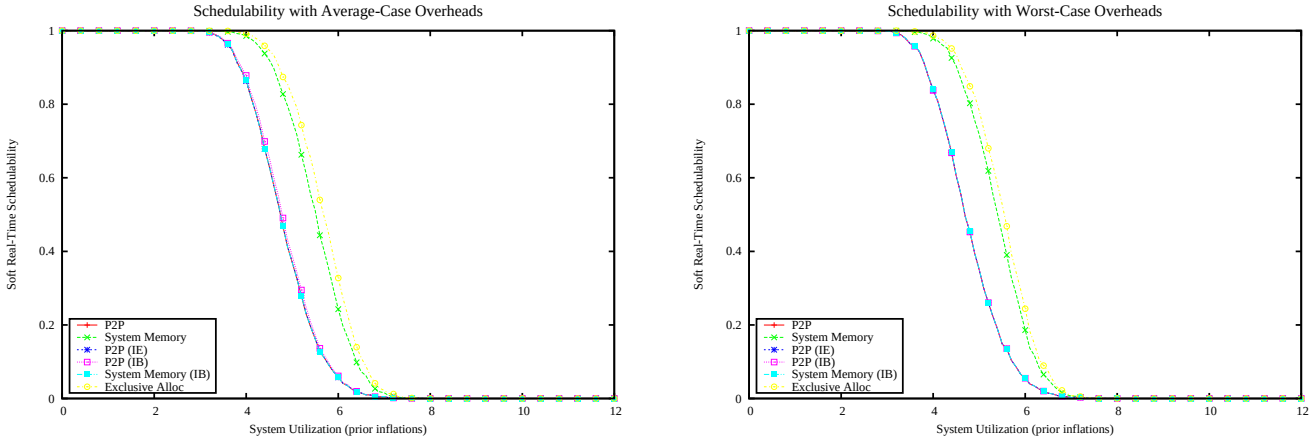

Figure 406: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

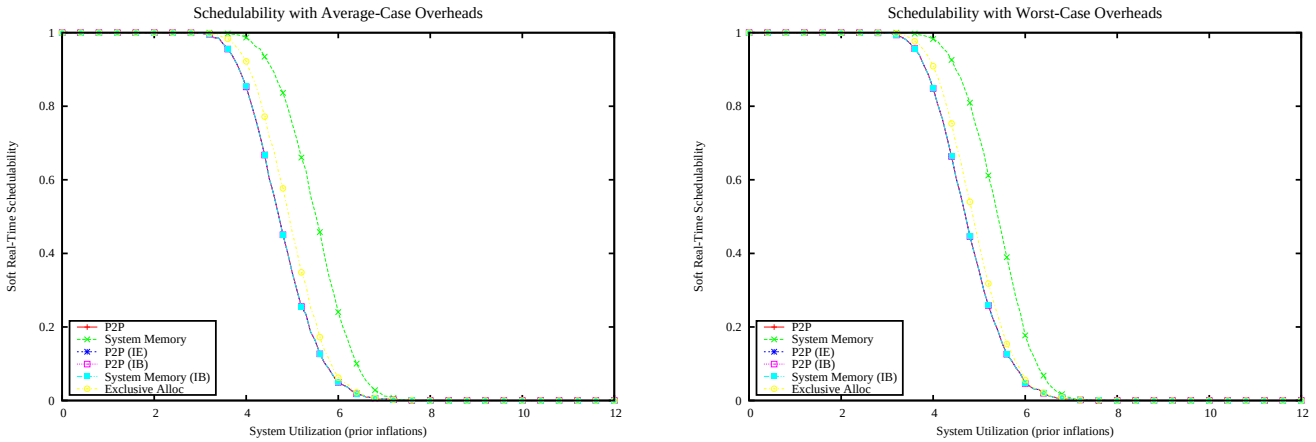

Figure 407: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

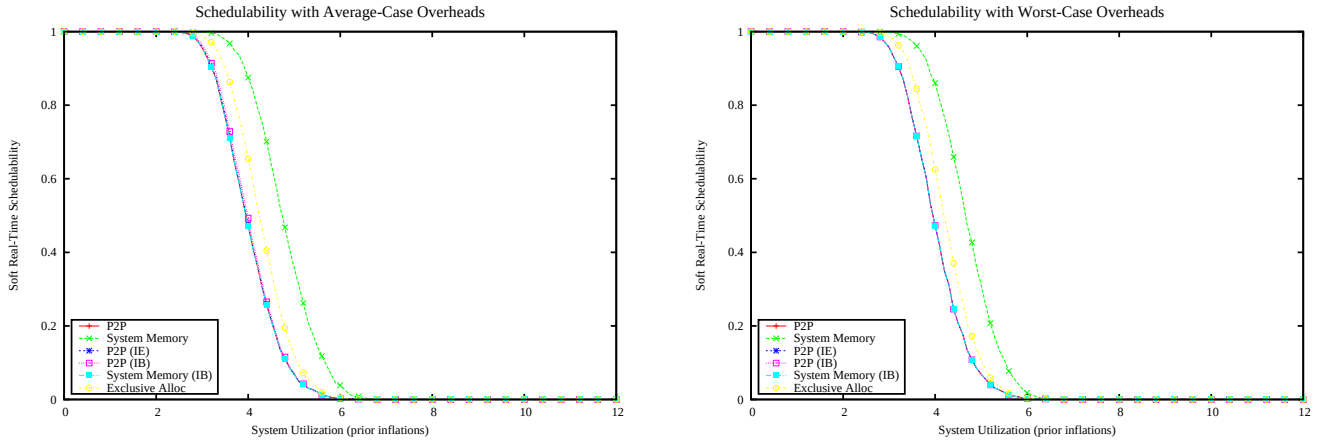

Figure 408: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

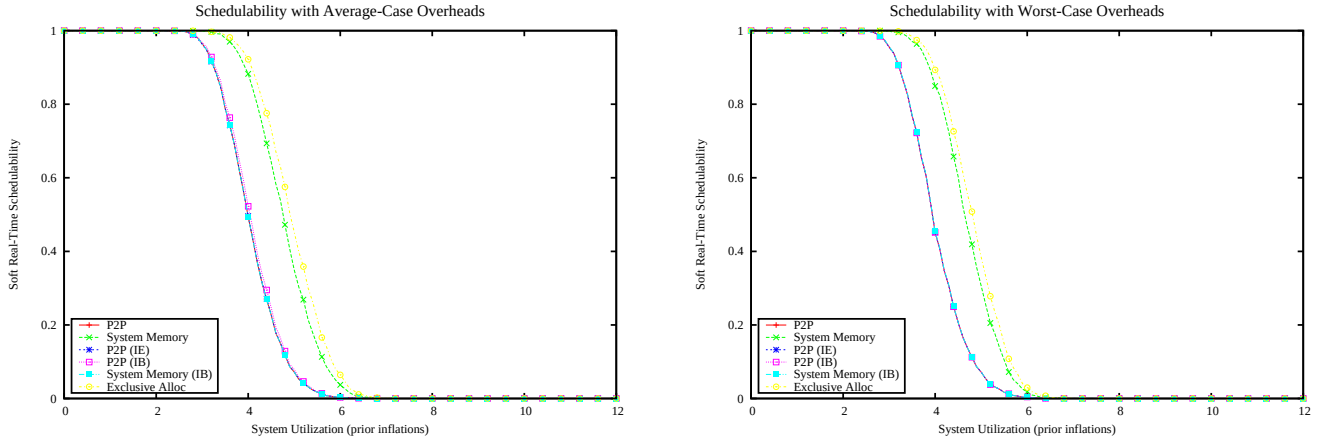

Figure 409: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

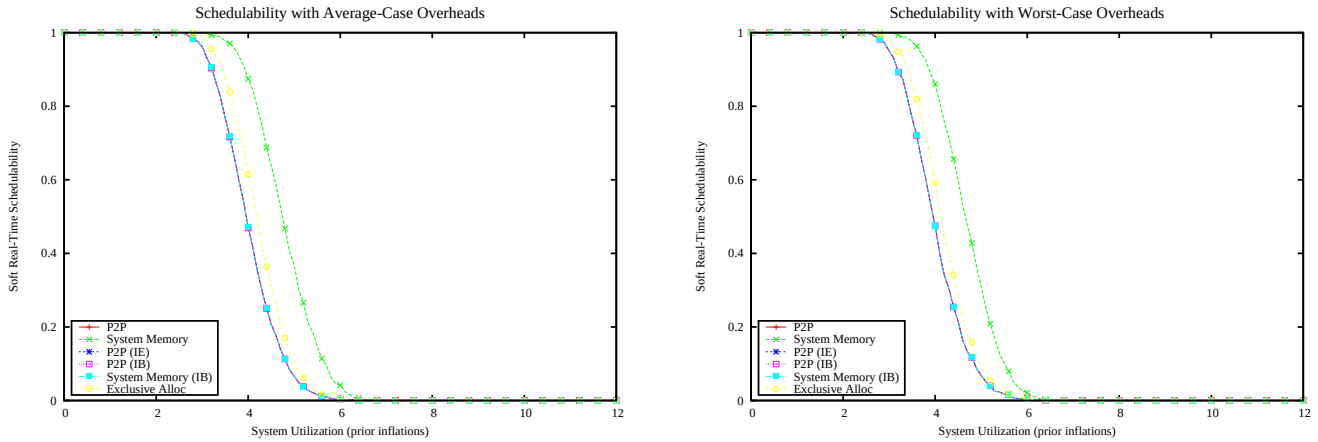

Figure 410: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

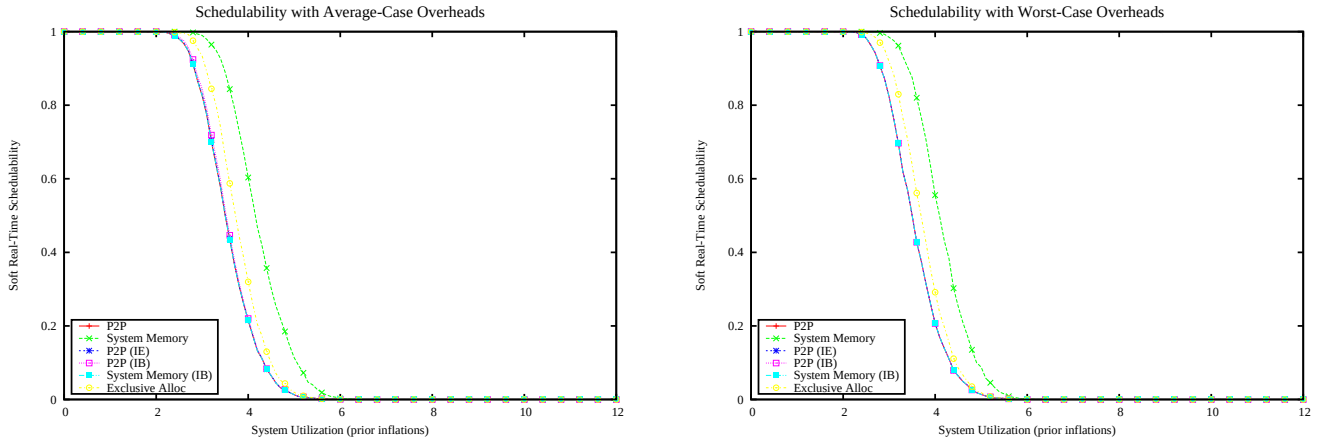

Figure 411: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

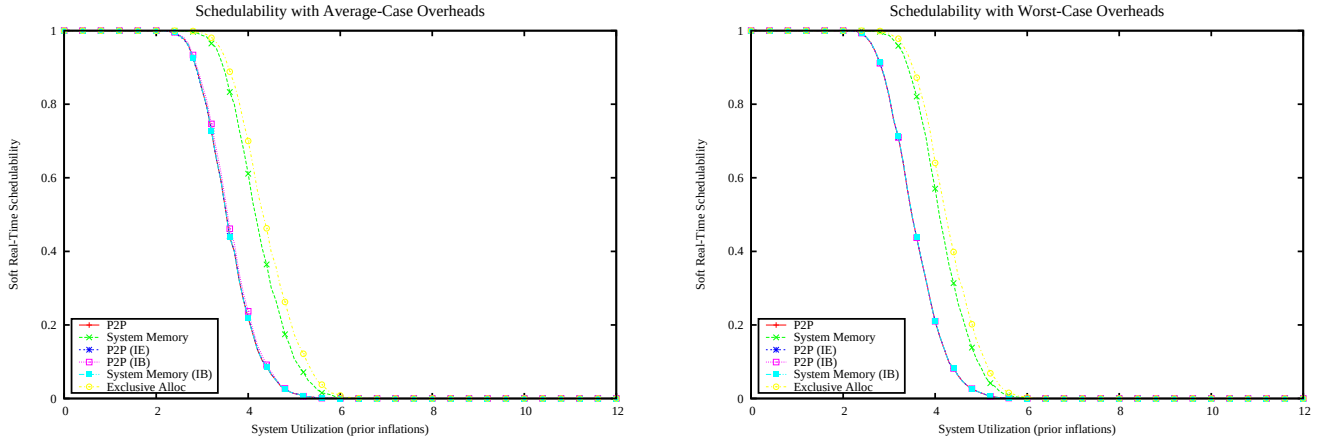

Figure 412: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

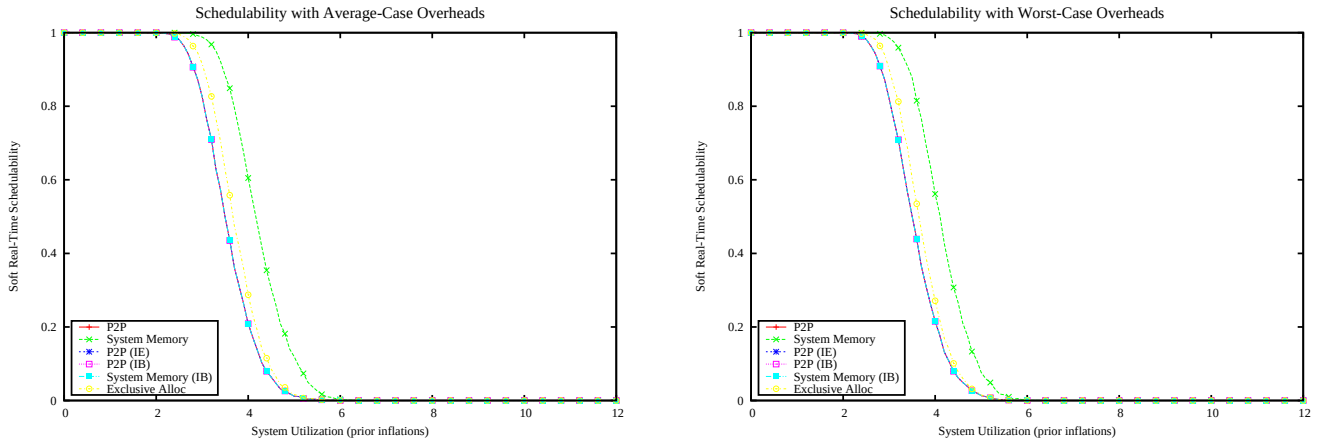

Figure 413: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

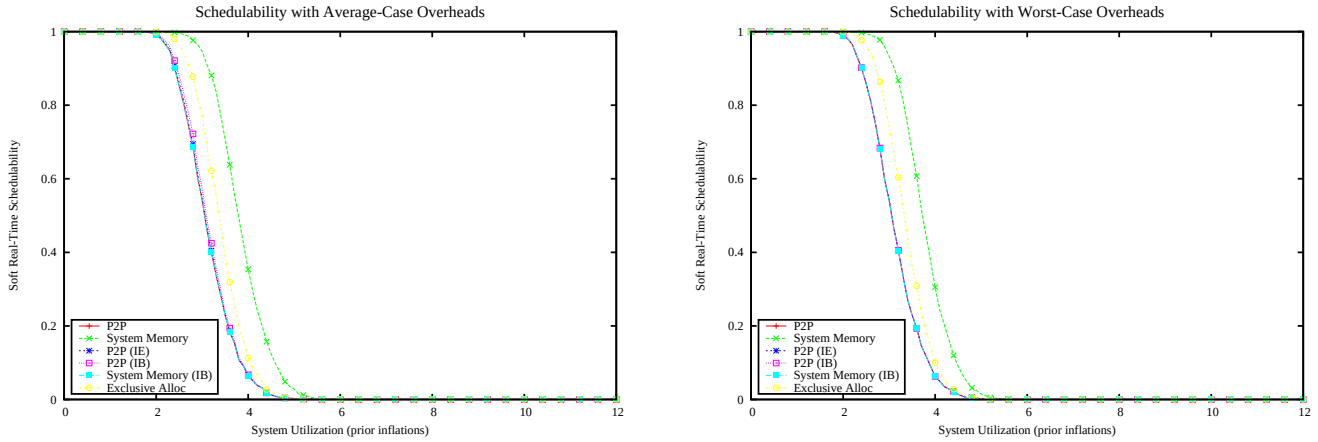

Figure 414: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

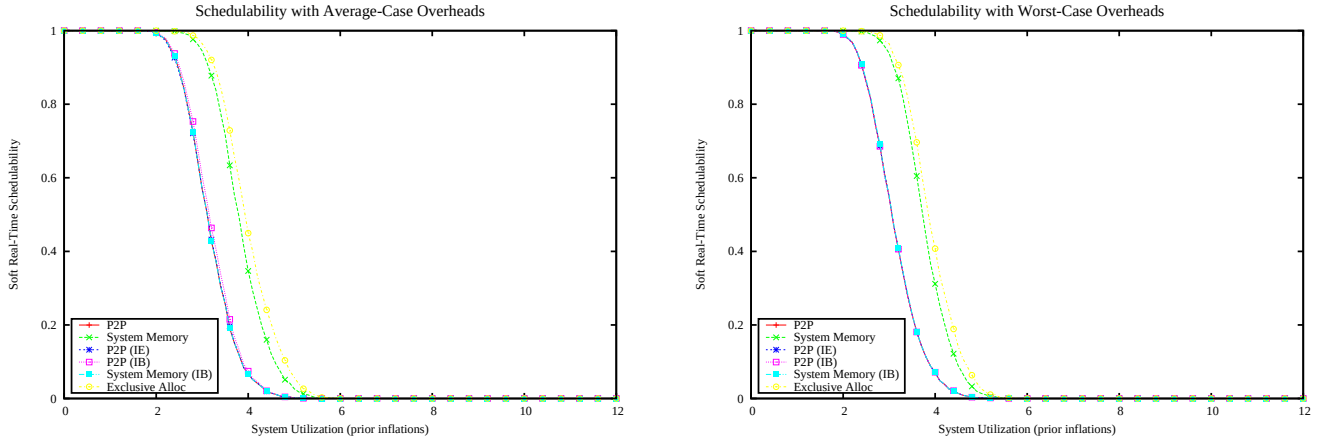

Figure 415: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

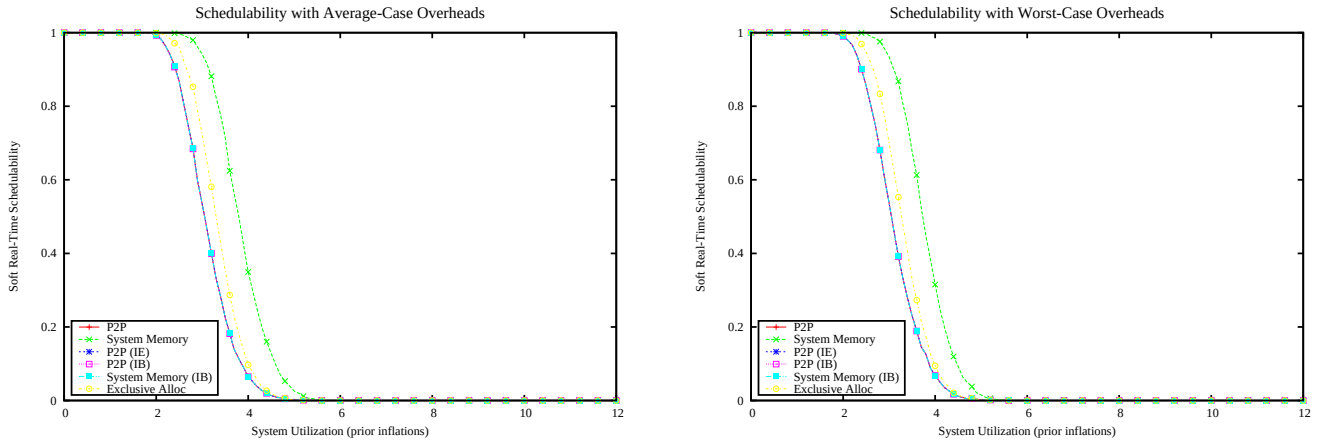

Figure 416: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

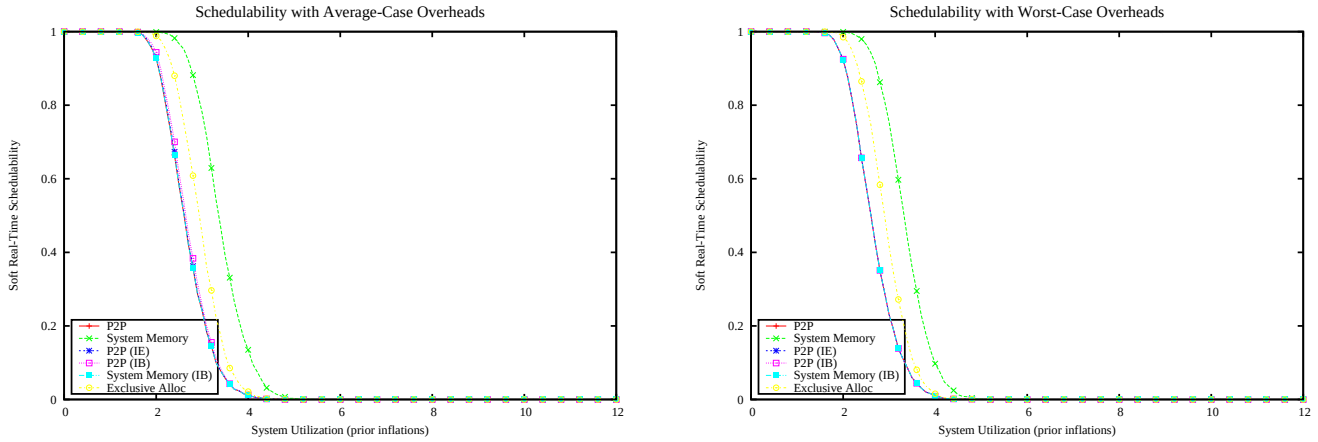

Figure 417: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

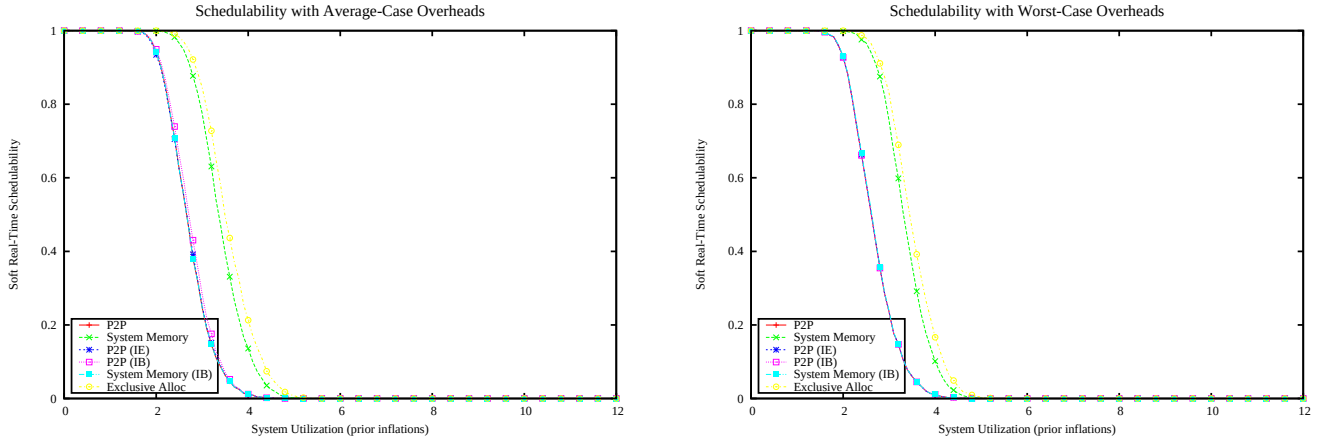

Figure 418: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

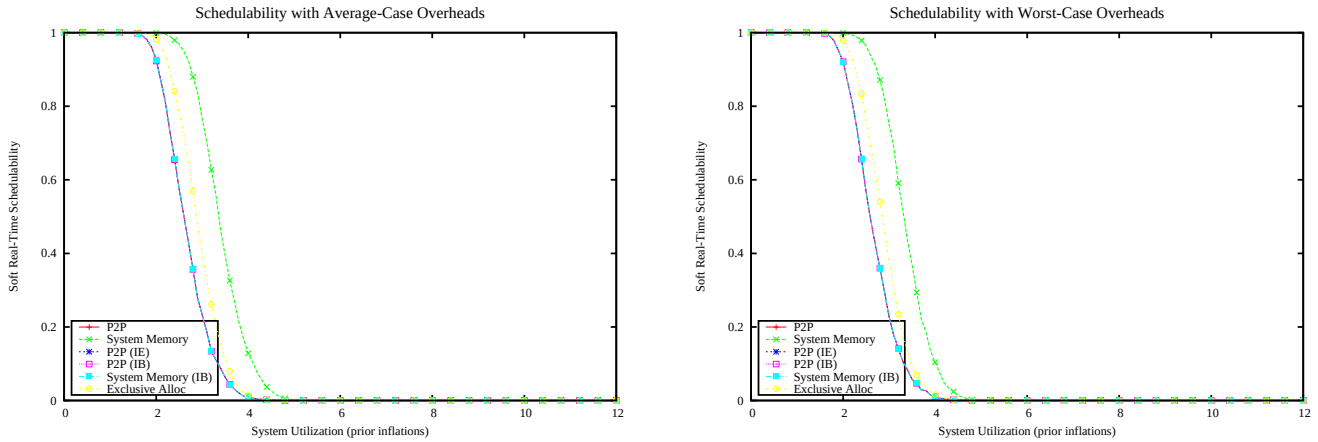

Figure 419: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

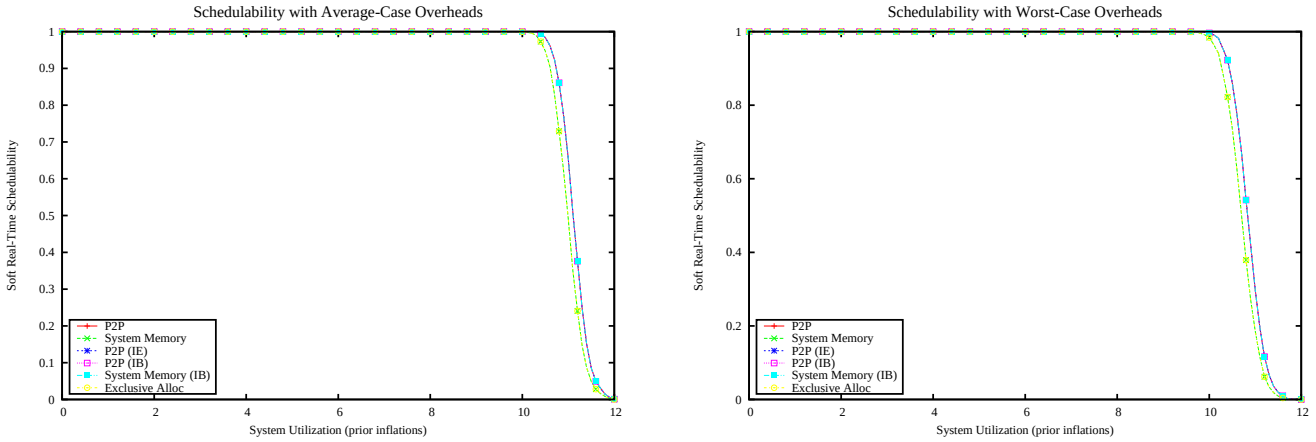

Figure 420: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

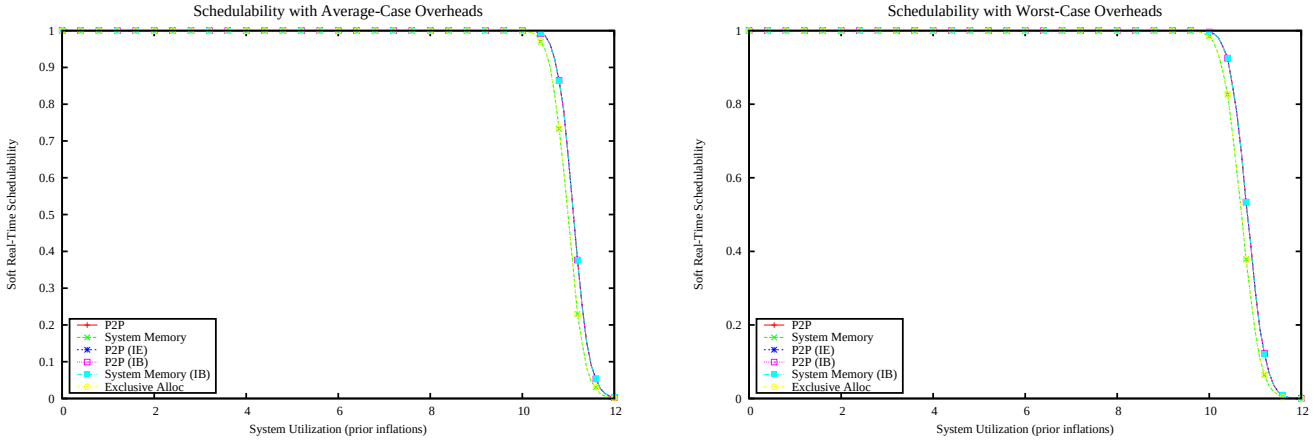

Figure 421: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

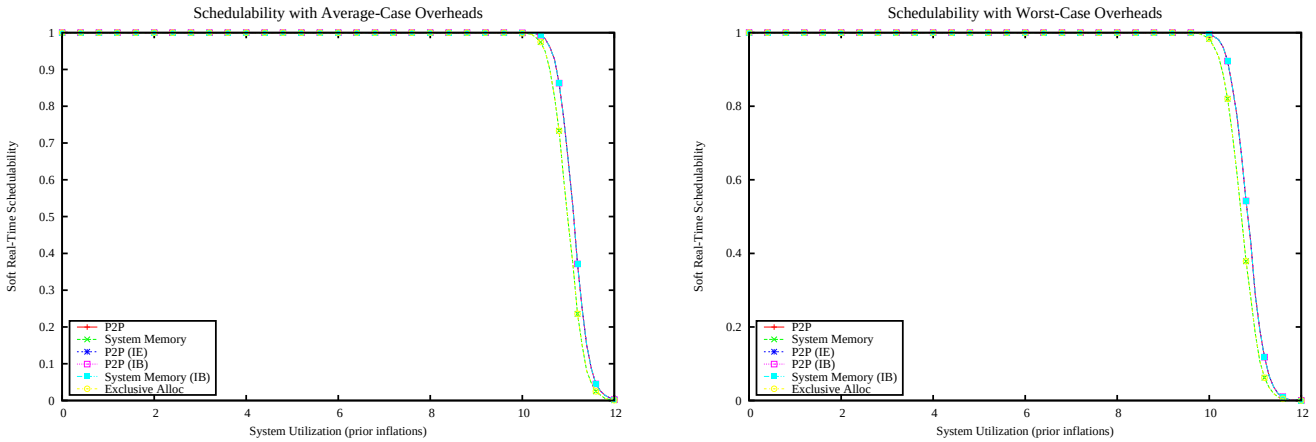

Figure 422: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

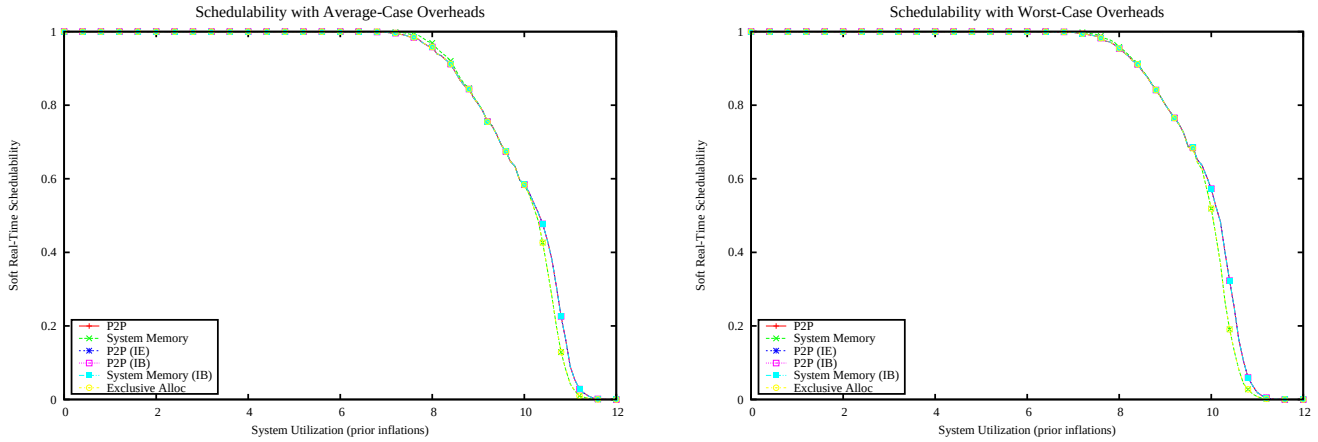

Figure 423: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

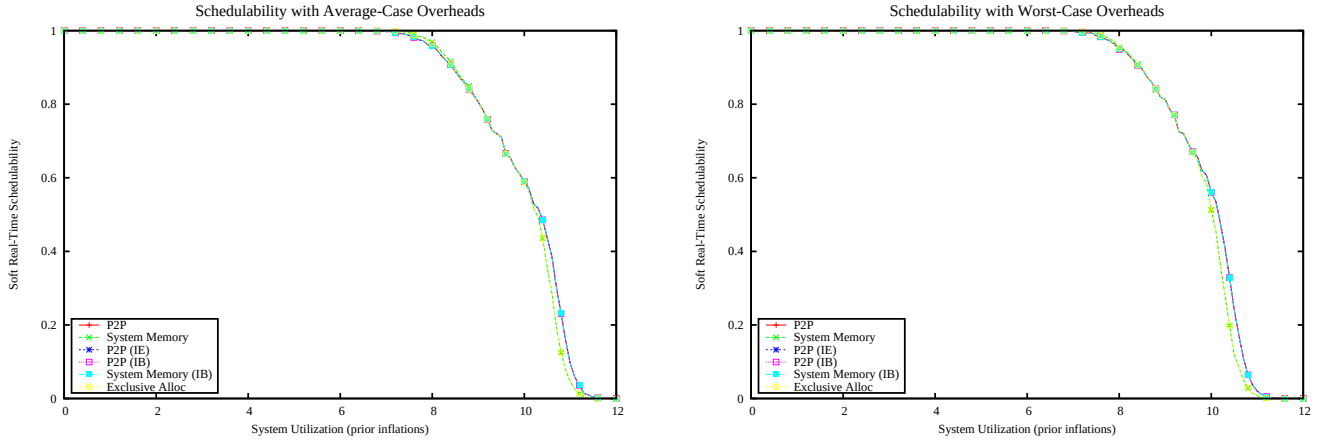

Figure 424: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

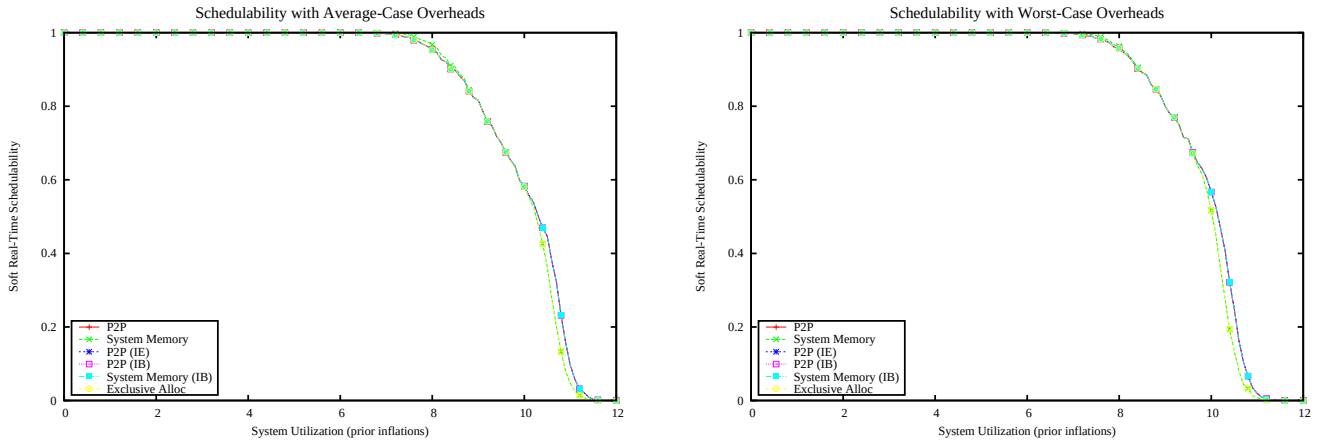

Figure 425: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

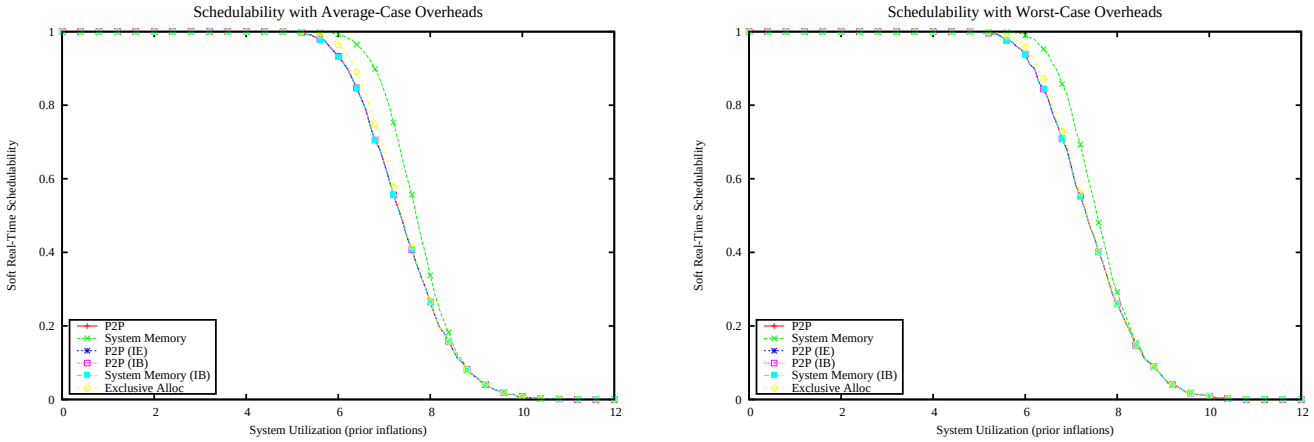

Figure 426: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

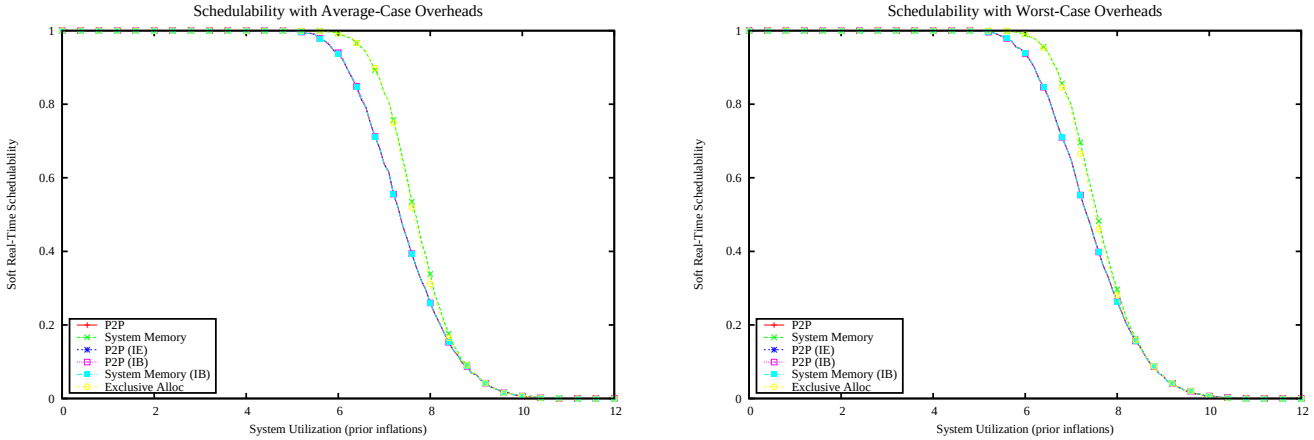

Figure 427: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

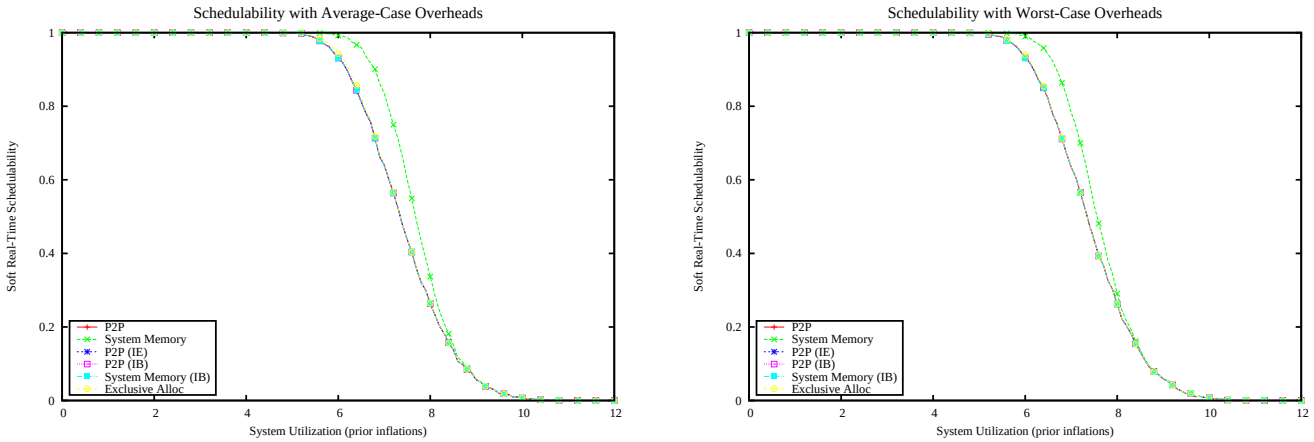

Figure 428: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

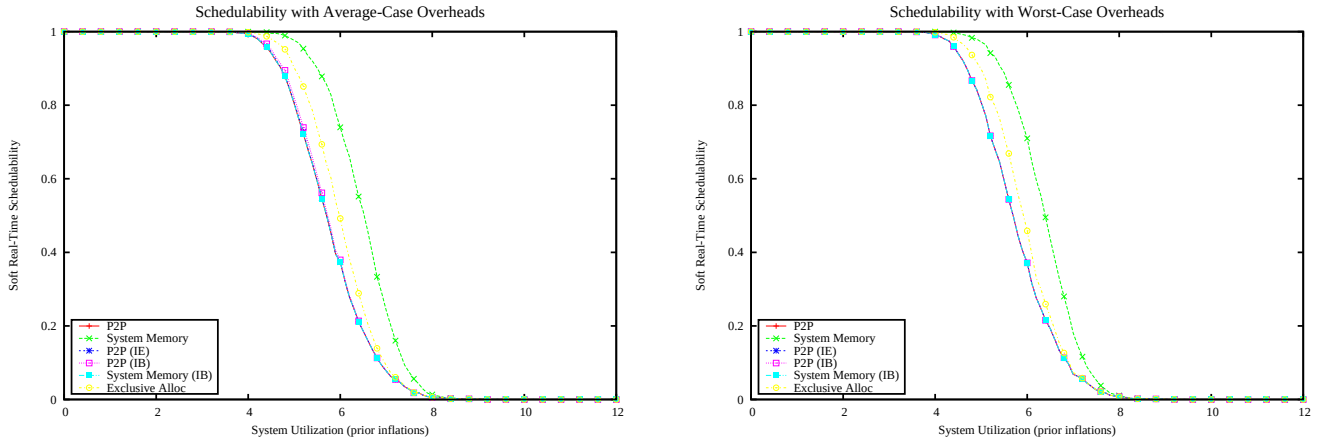

Figure 429: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

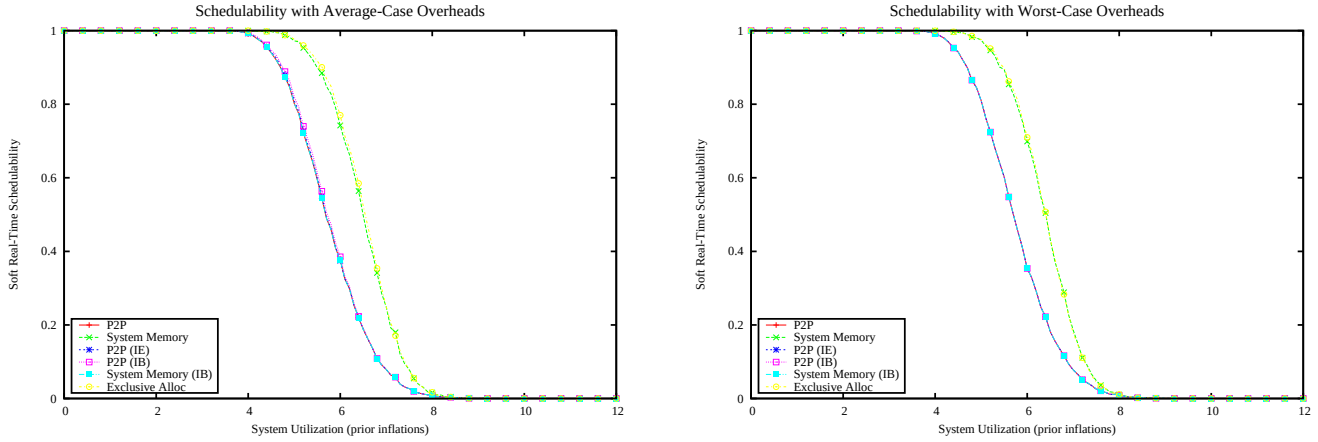

Figure 430: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

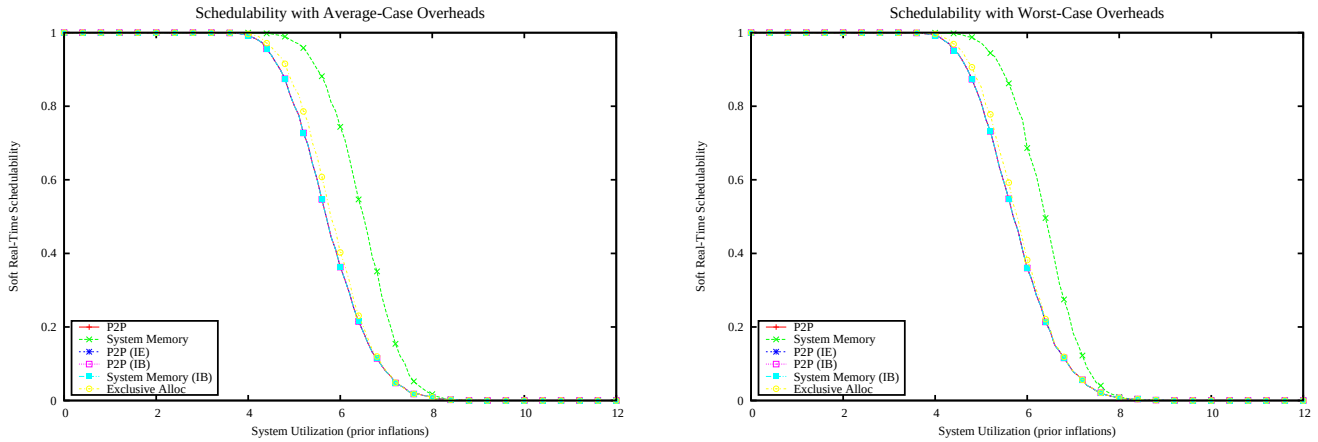

Figure 431: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

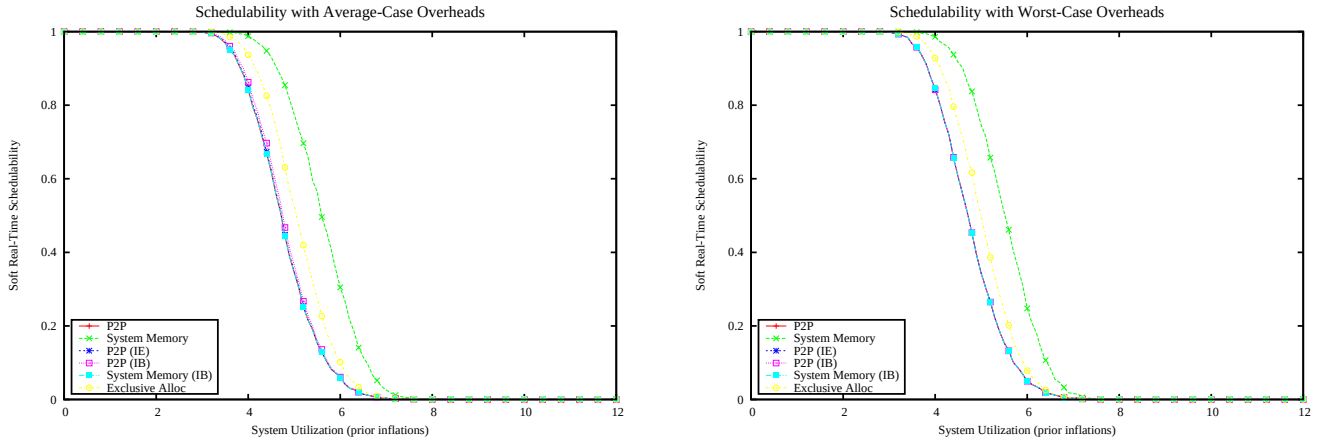

Figure 432: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

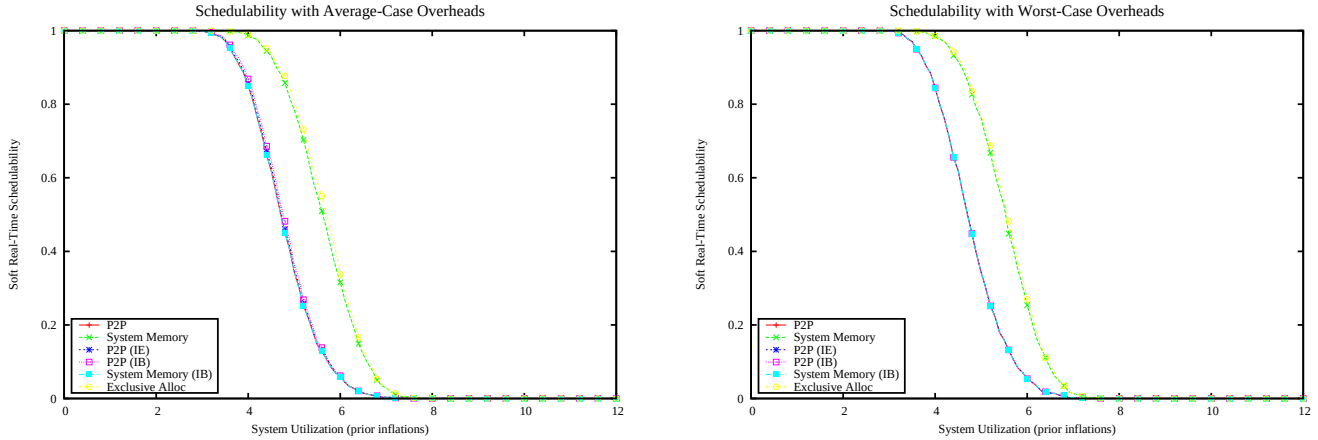

Figure 433: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

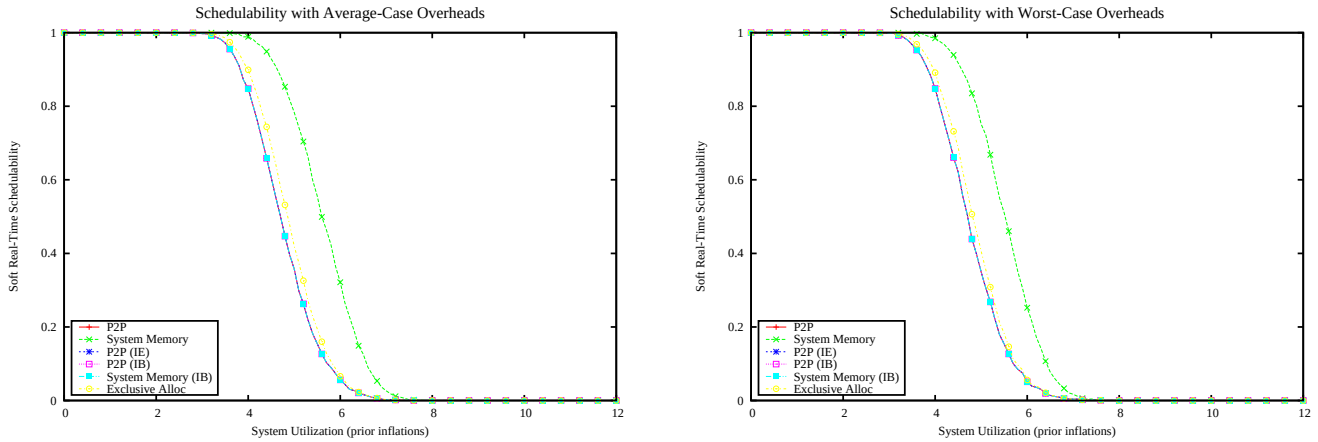

Figure 434: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

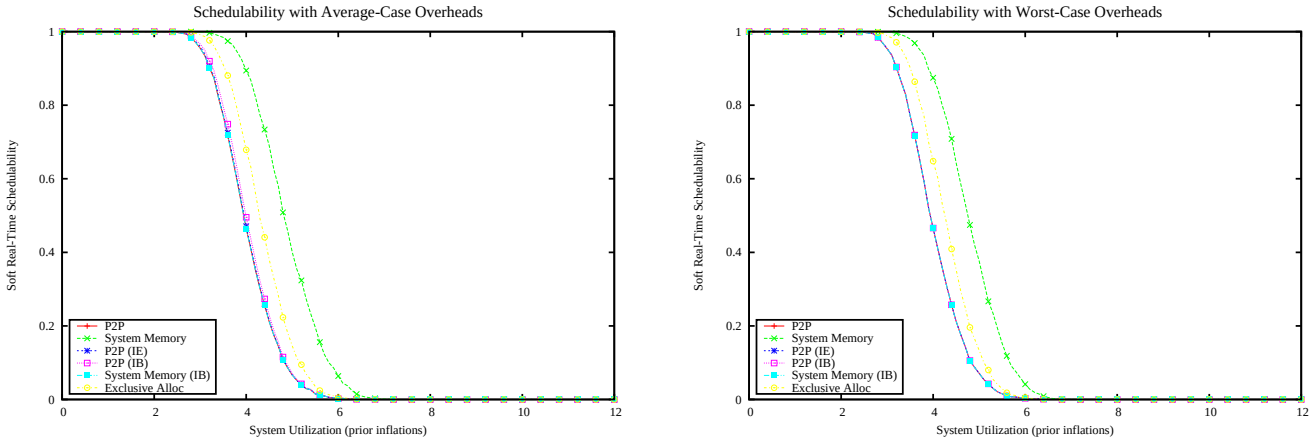

Figure 435: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

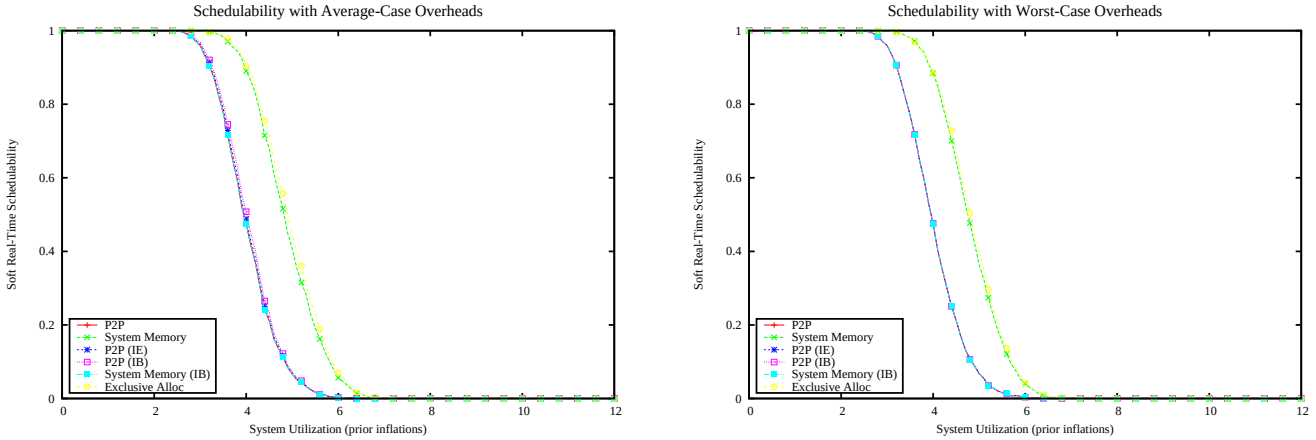

Figure 436: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

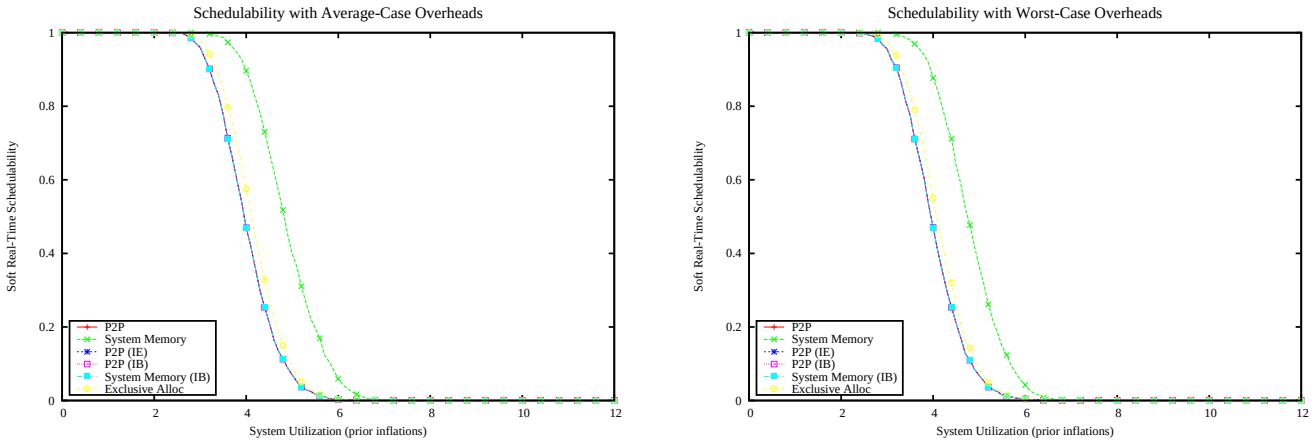

Figure 437: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

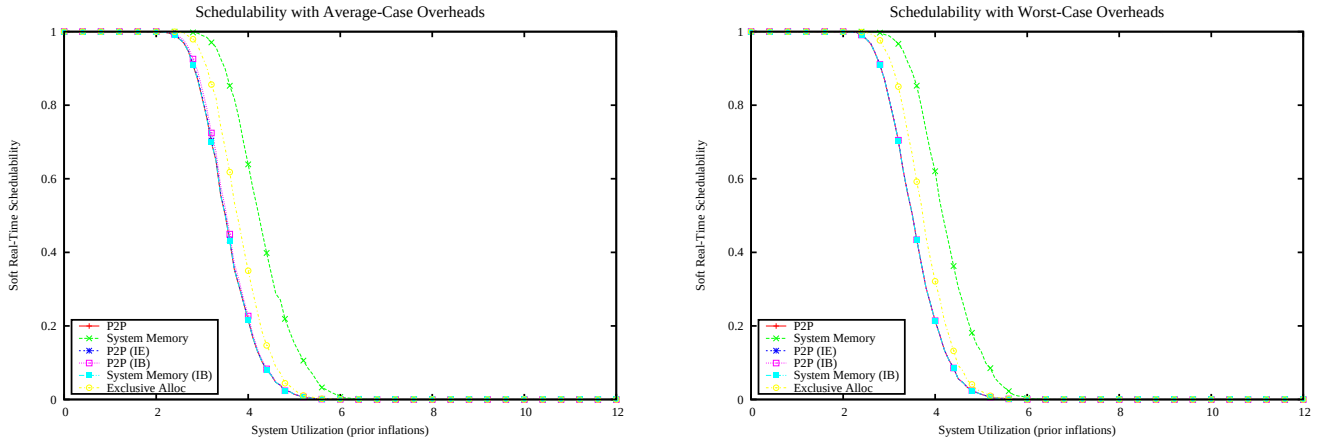

Figure 438: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

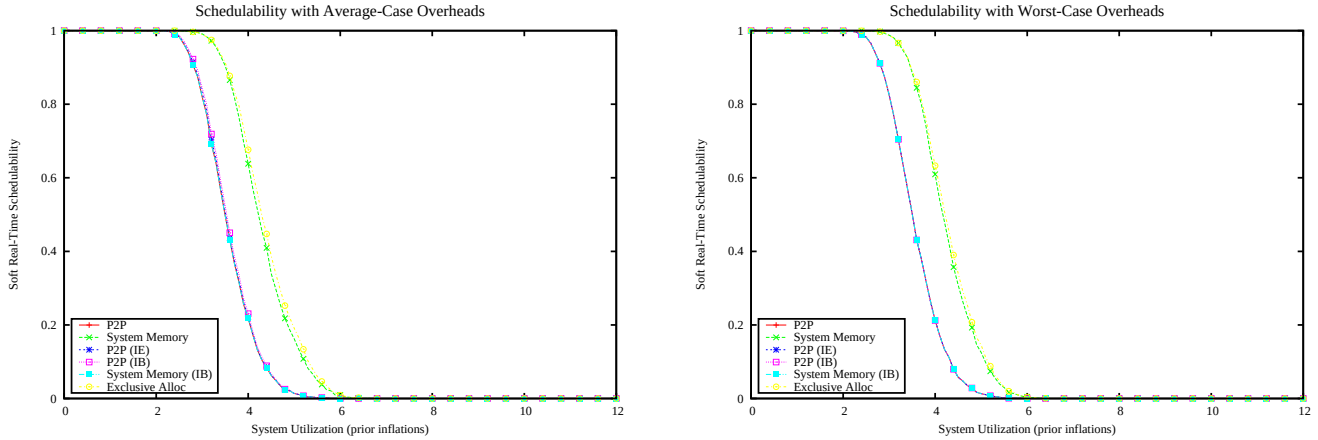

Figure 439: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

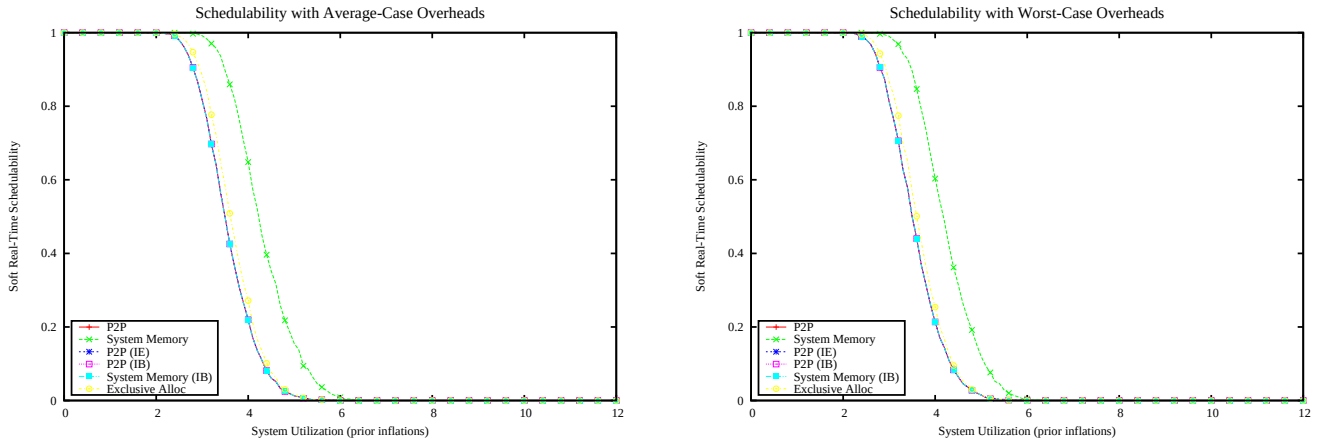

Figure 440: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

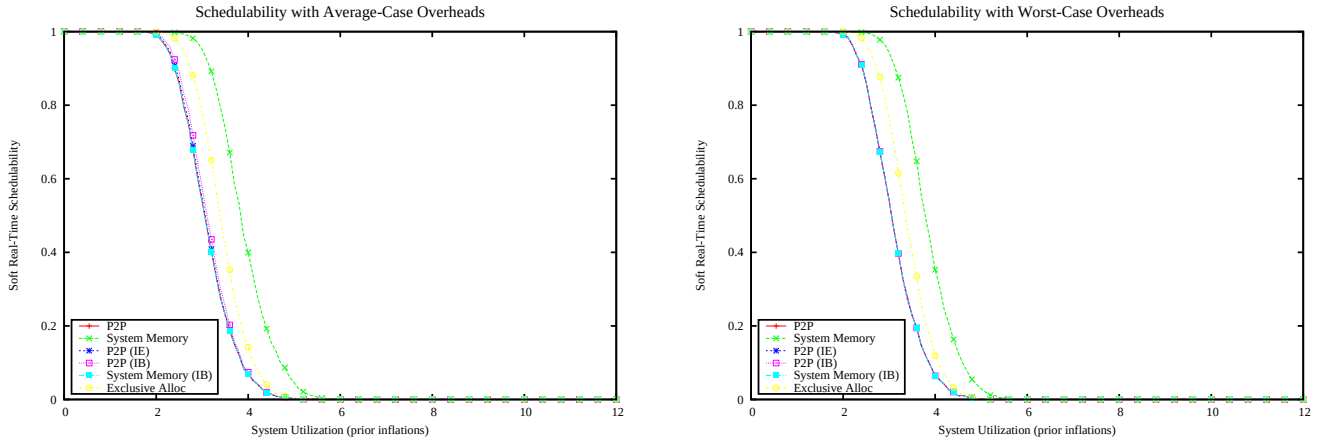

Figure 441: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

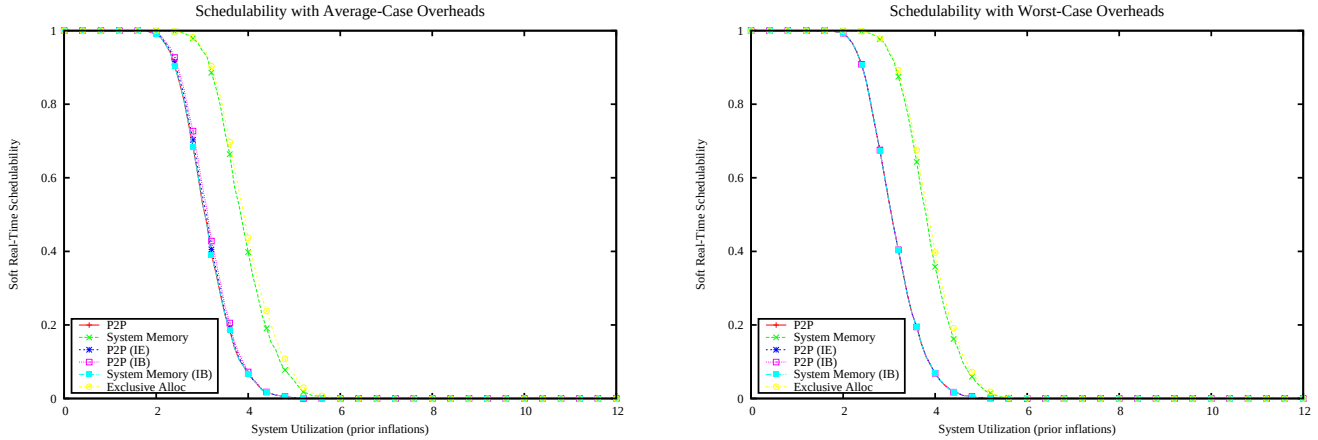

Figure 442: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

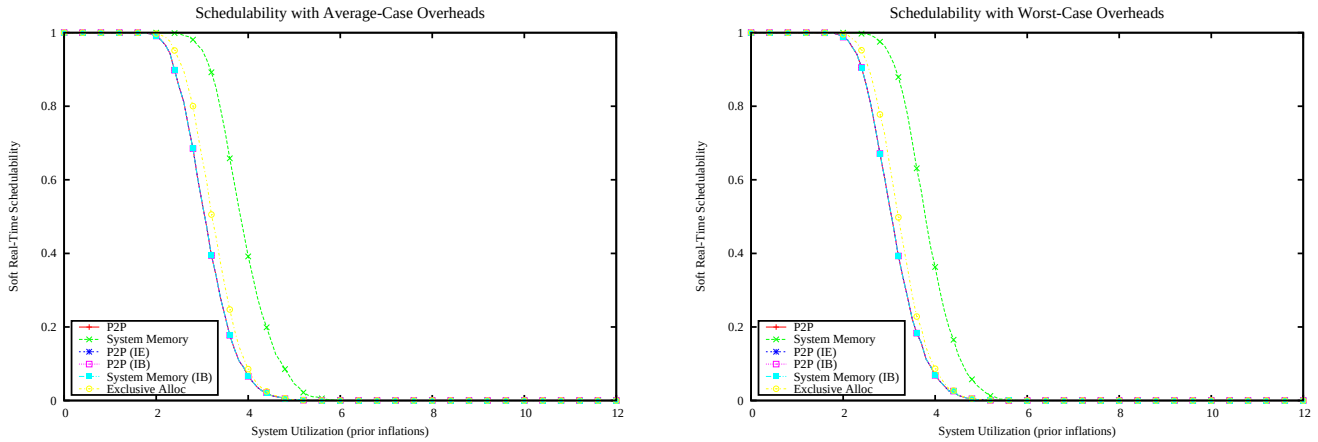

Figure 443: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

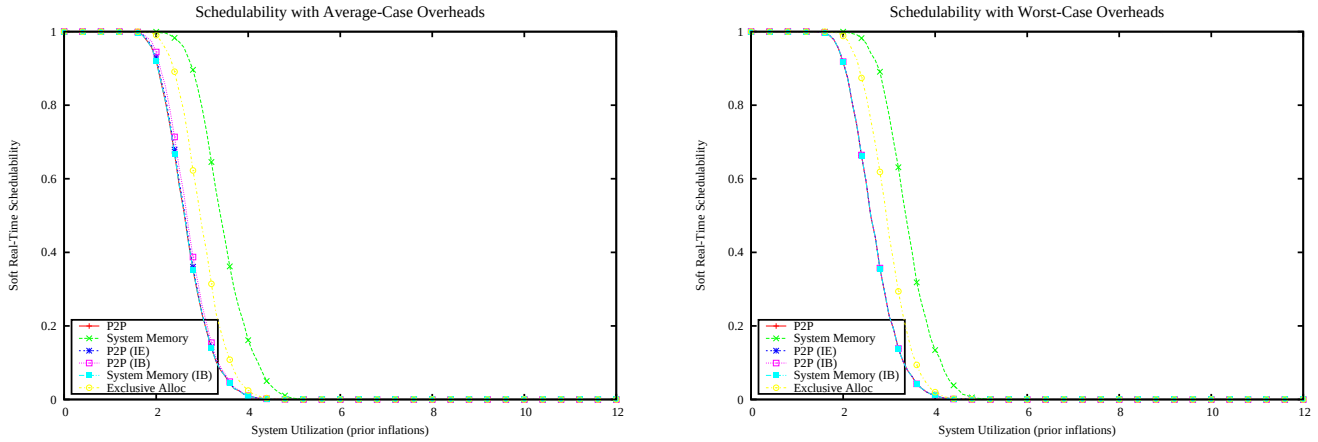

Figure 444: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

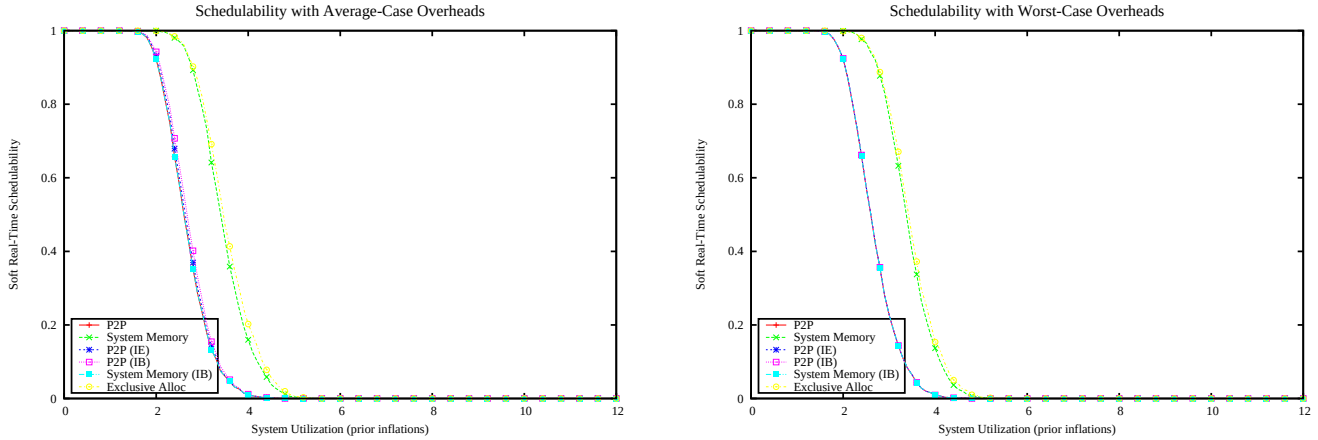

Figure 445: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

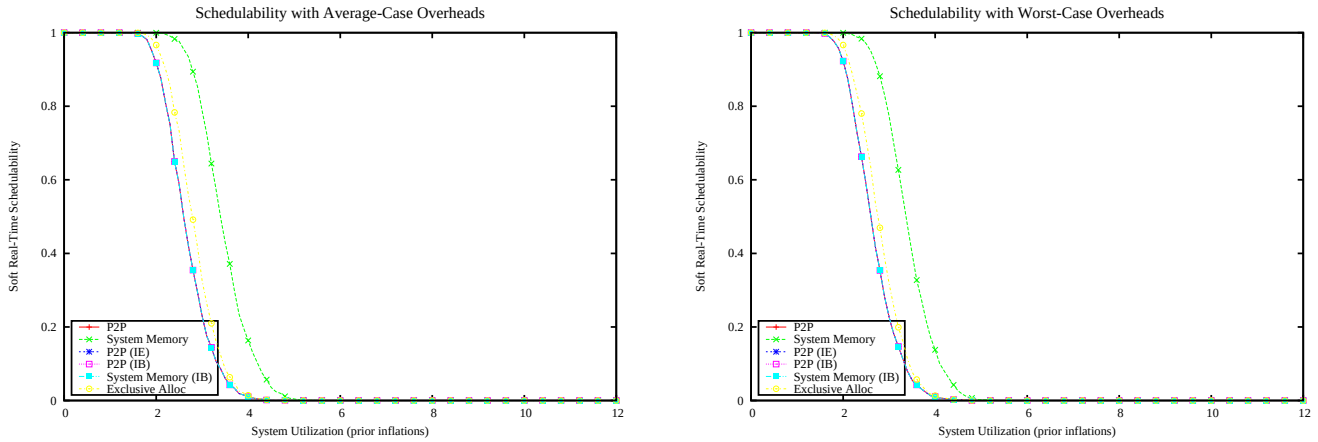

Figure 446: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

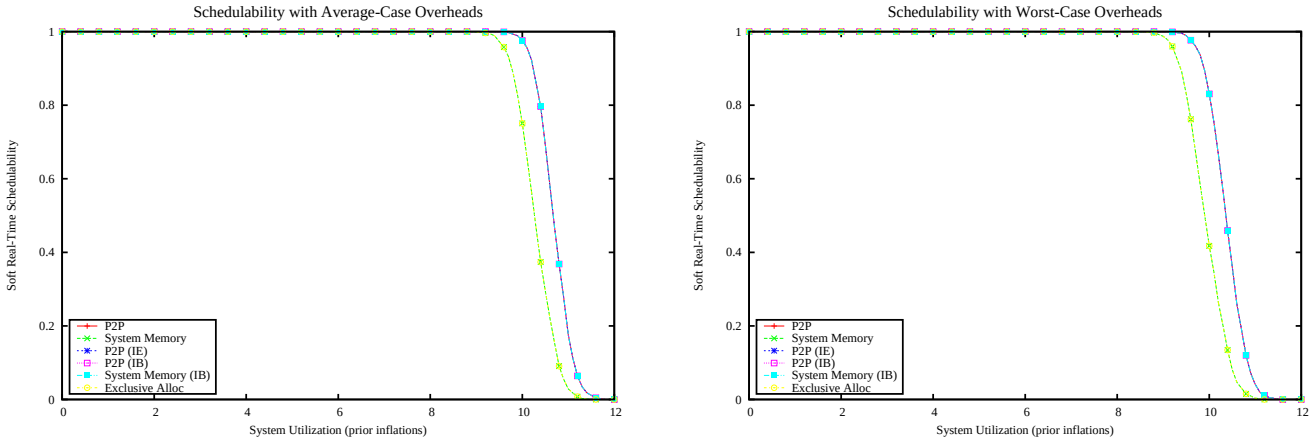

Figure 447: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

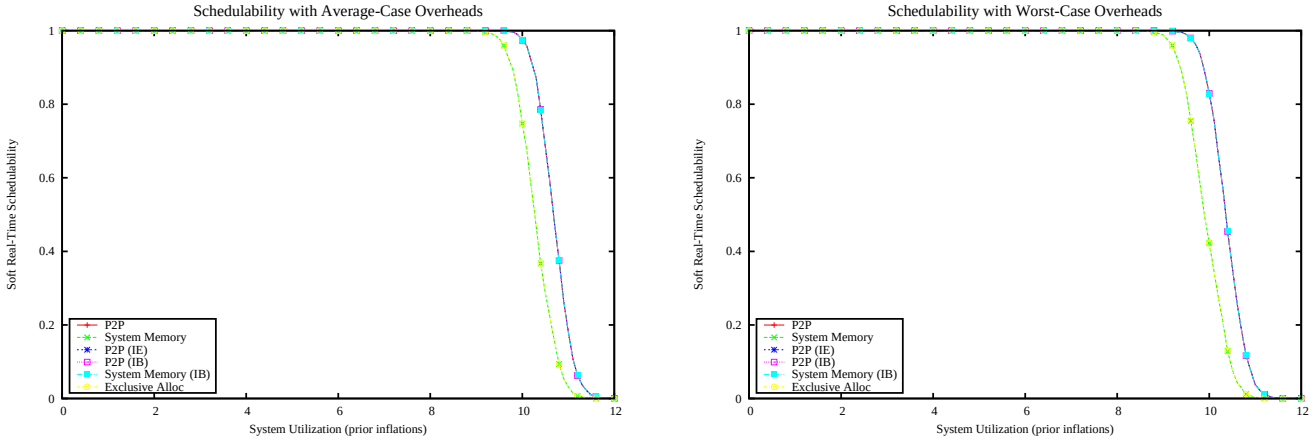

Figure 448: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

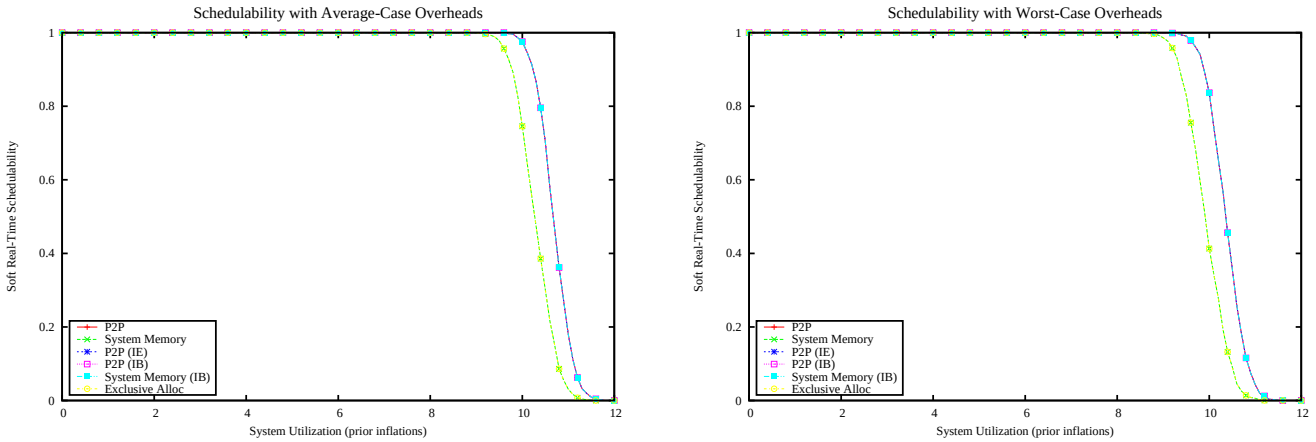

Figure 449: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

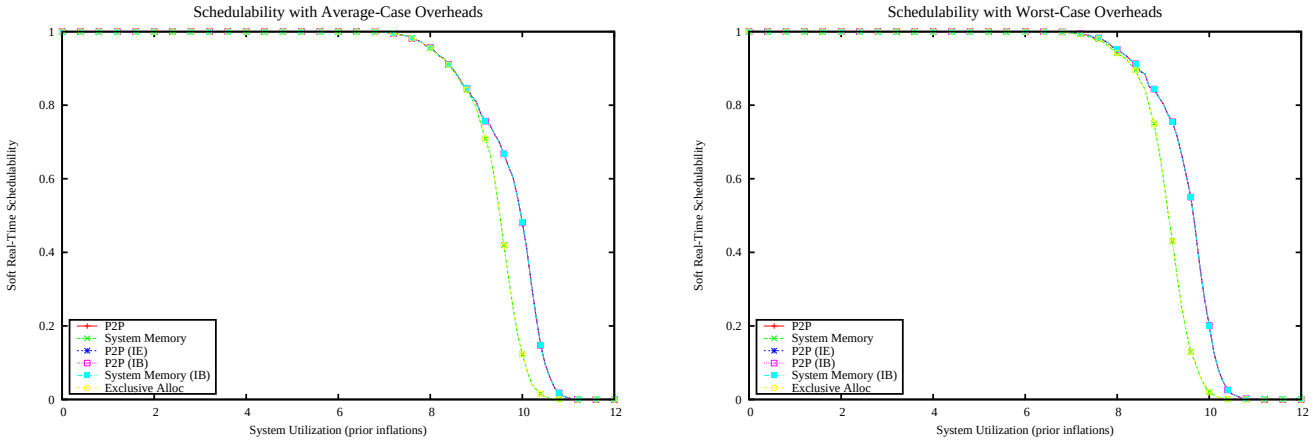

Figure 450: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

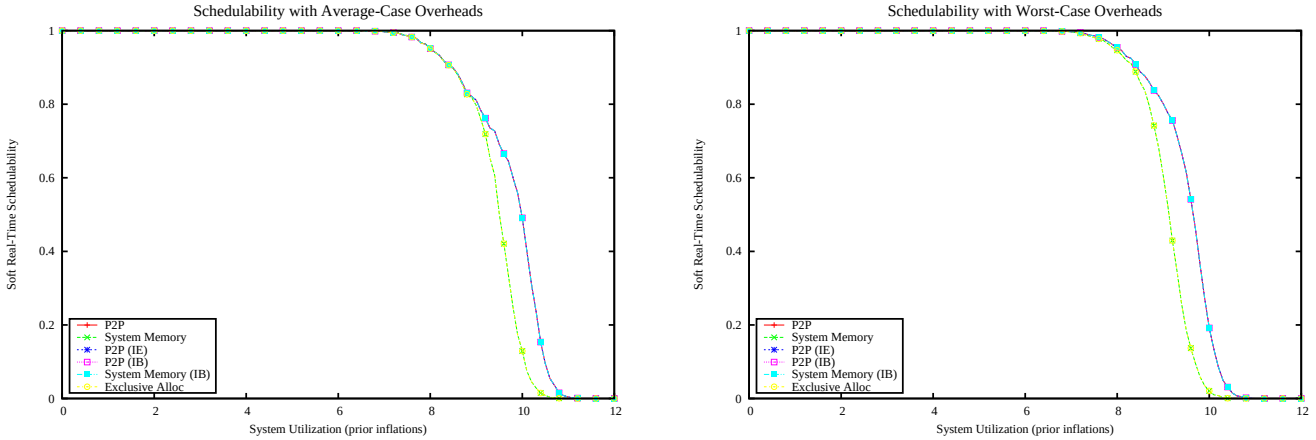

Figure 451: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

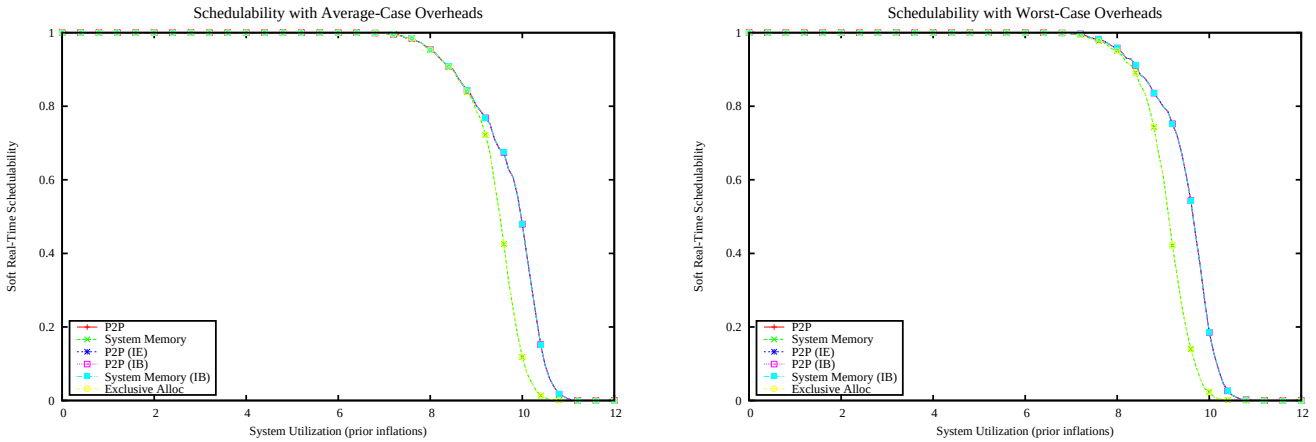

Figure 452: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

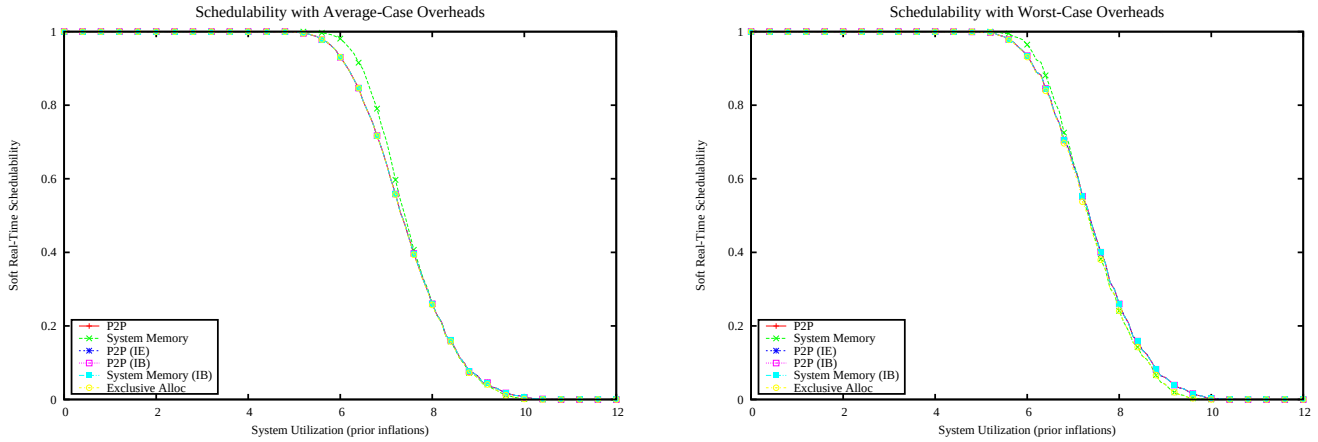

Figure 453: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

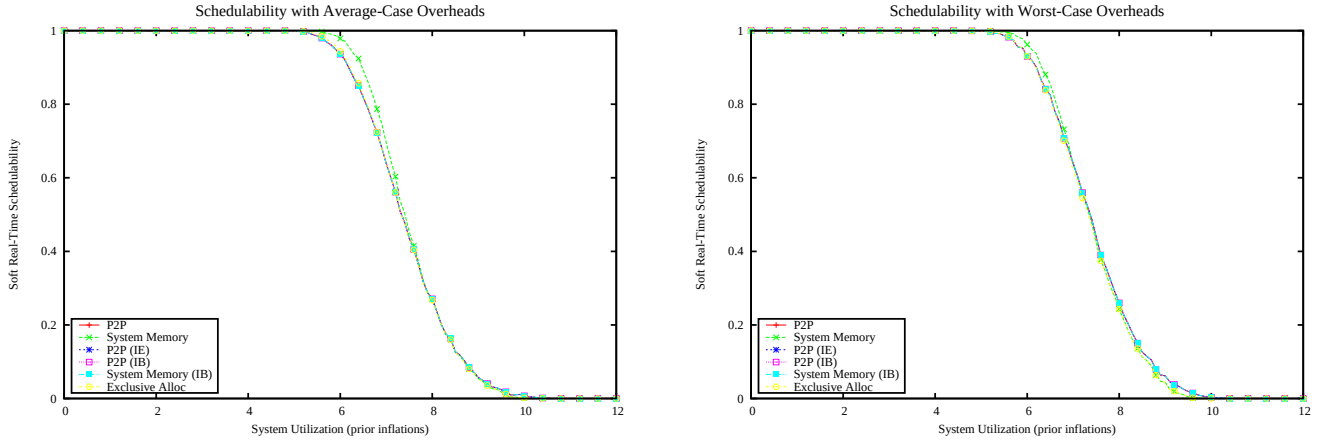

Figure 454: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

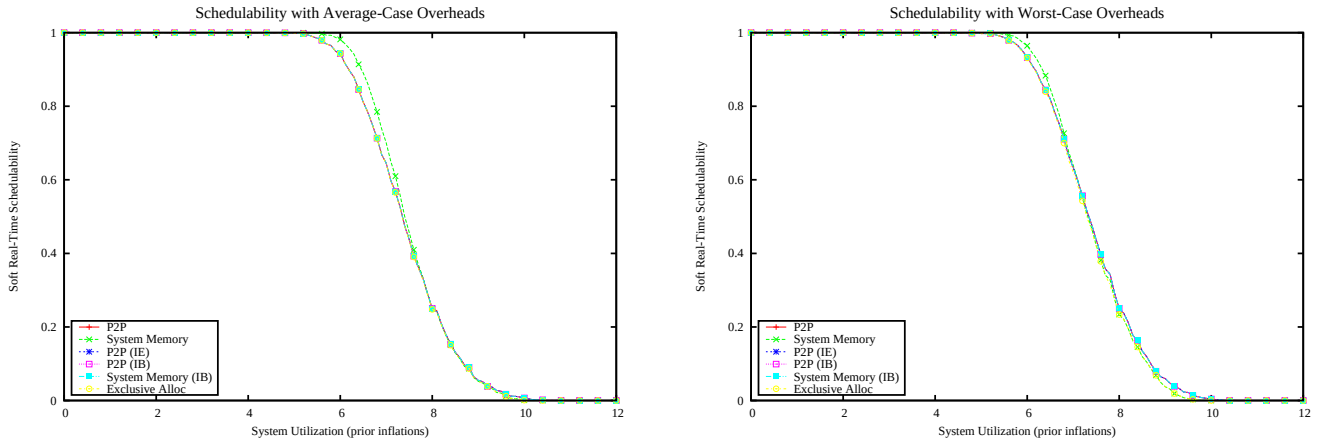

Figure 455: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

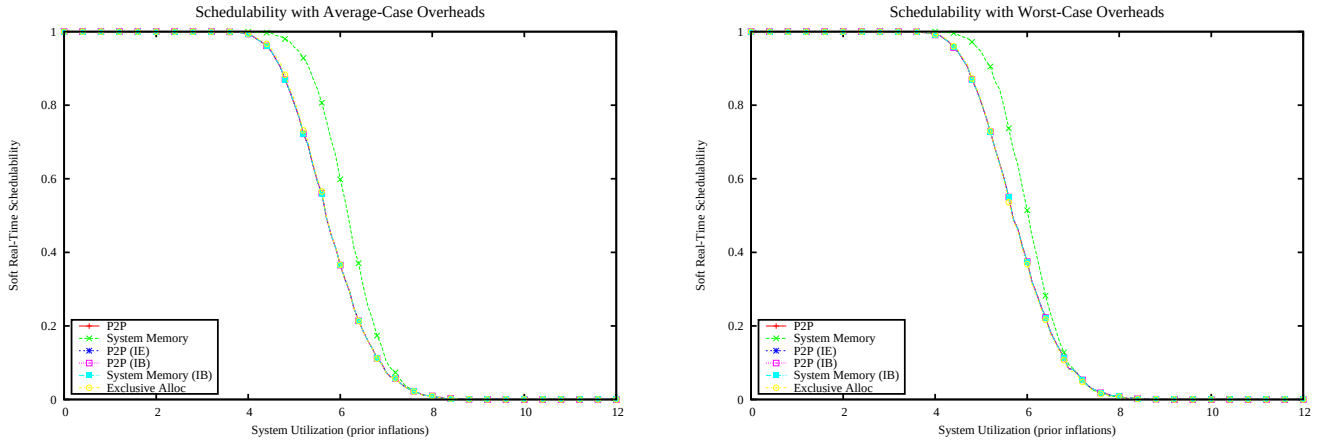

Figure 456: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

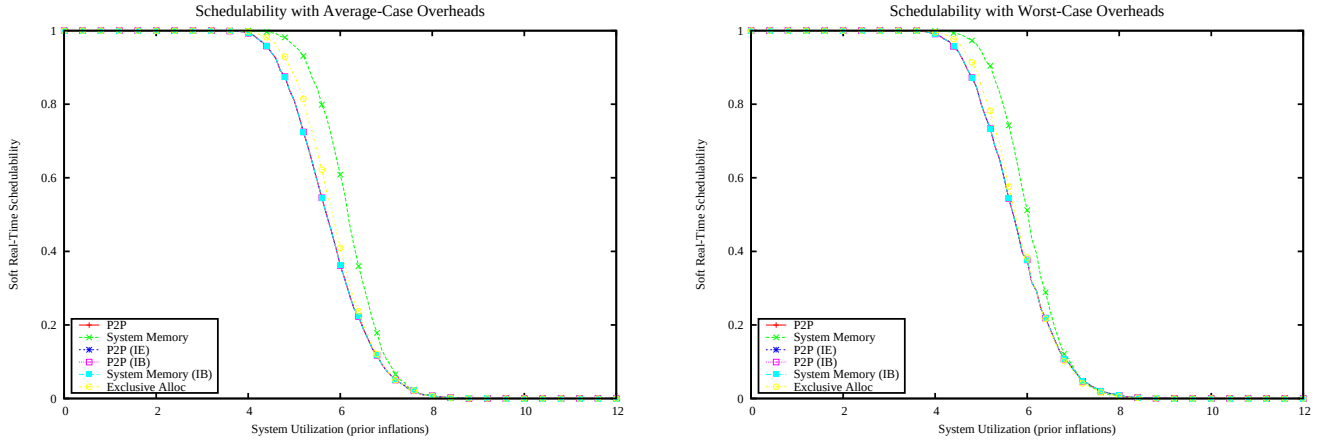

Figure 457: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

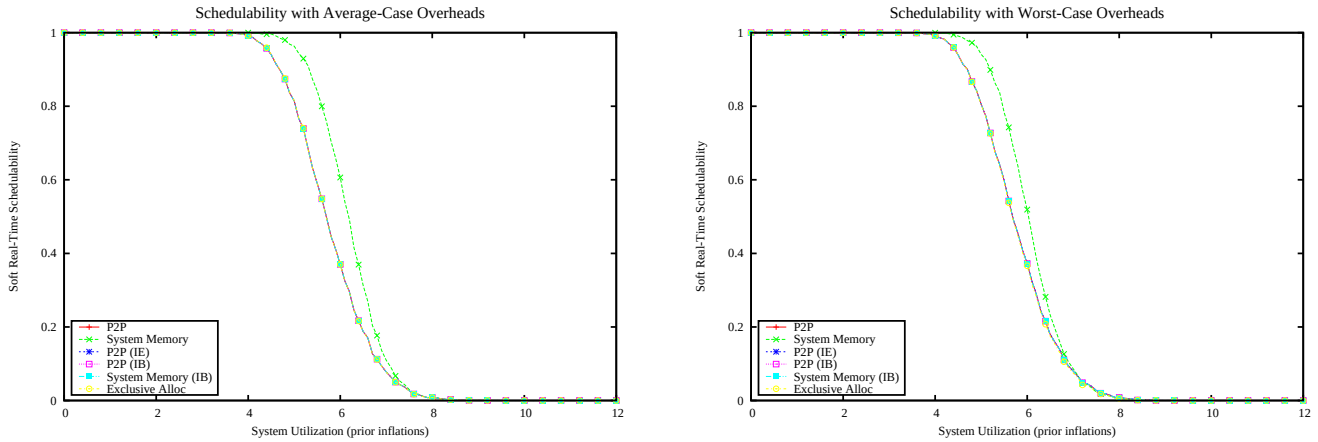

Figure 458: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

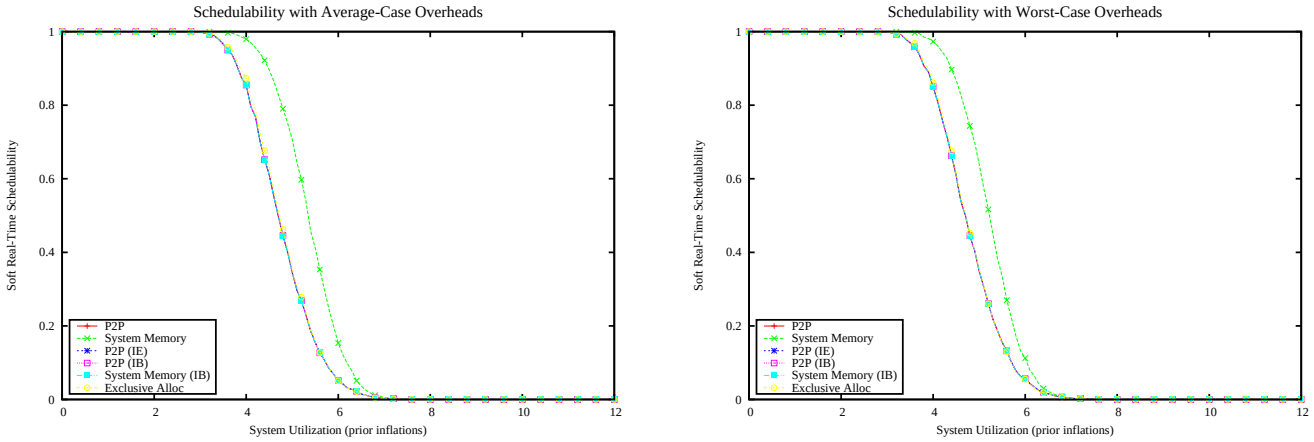

Figure 459: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

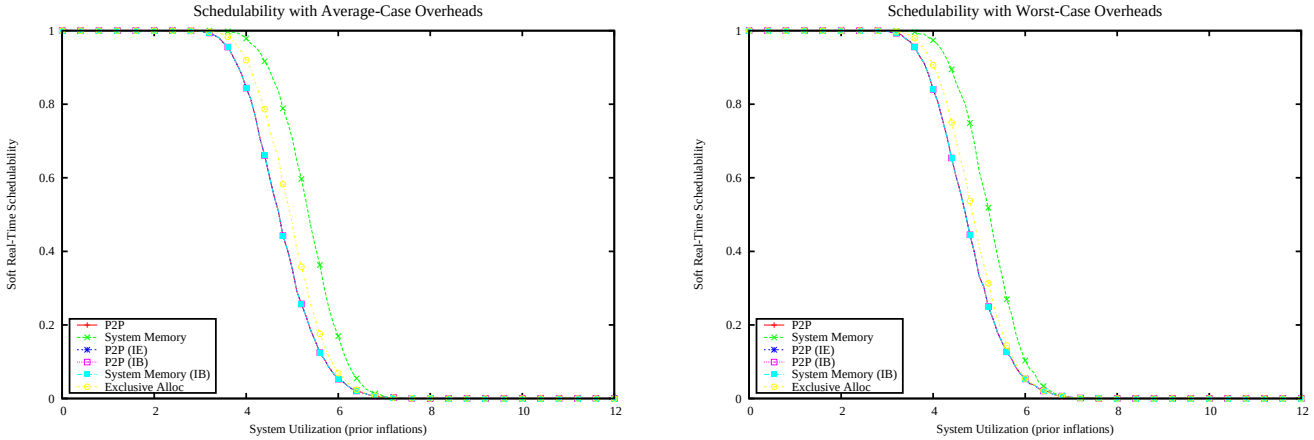

Figure 460: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

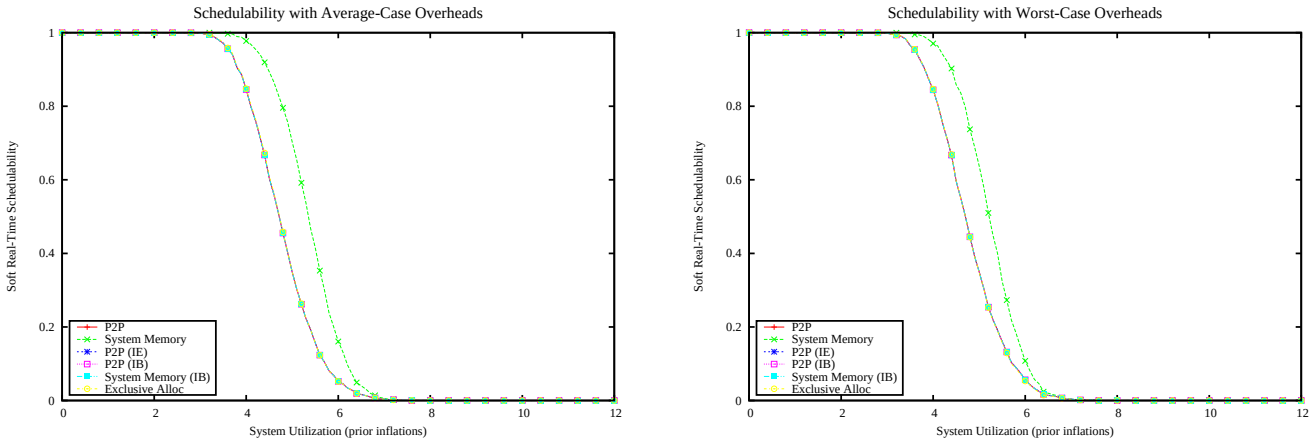

Figure 461: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

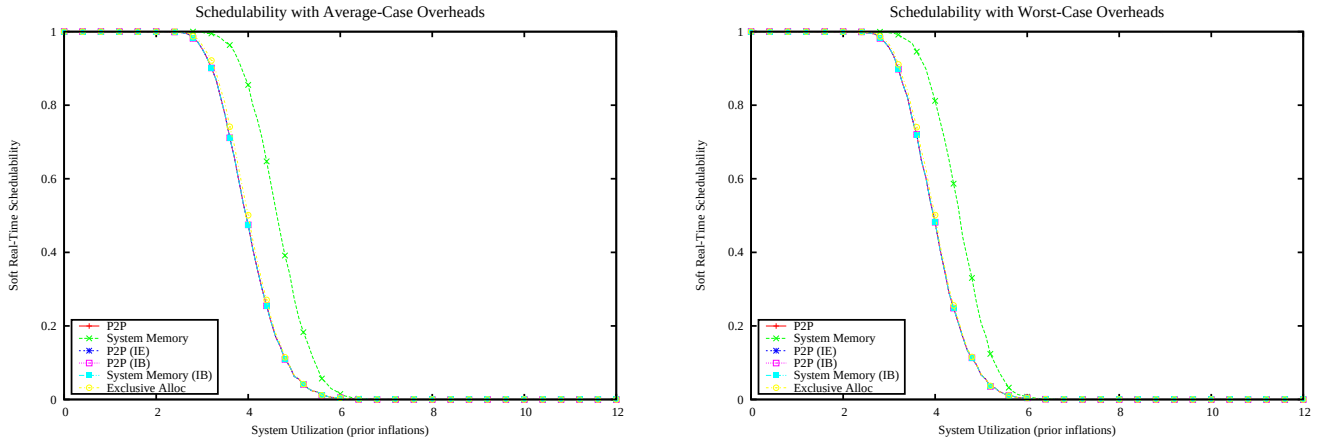

Figure 462: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

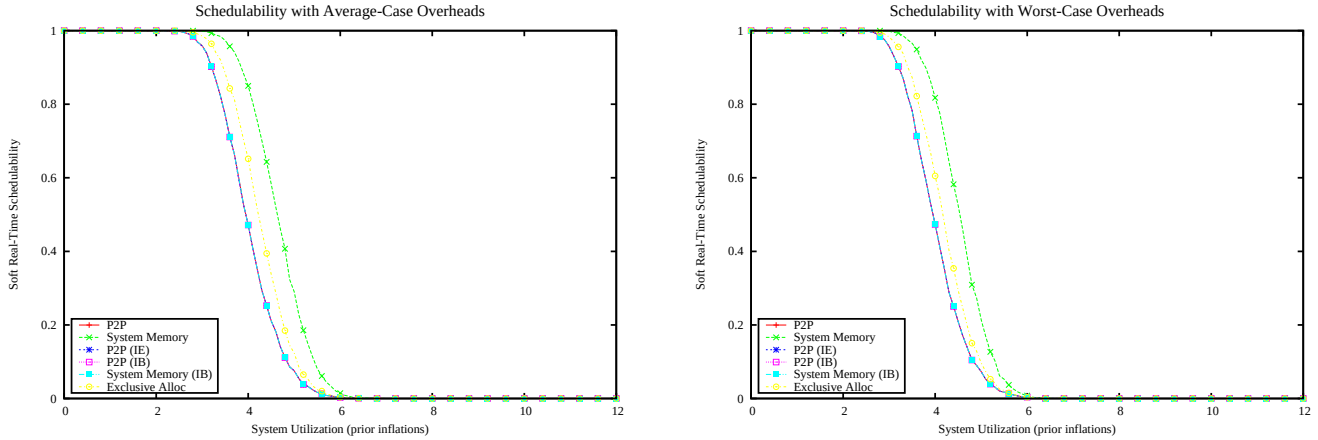

Figure 463: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

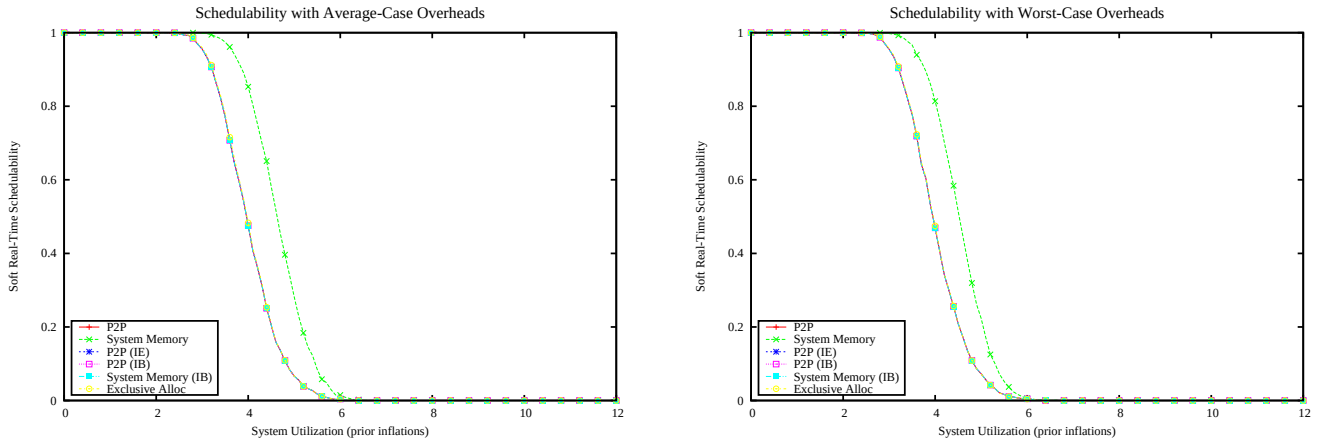

Figure 464: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

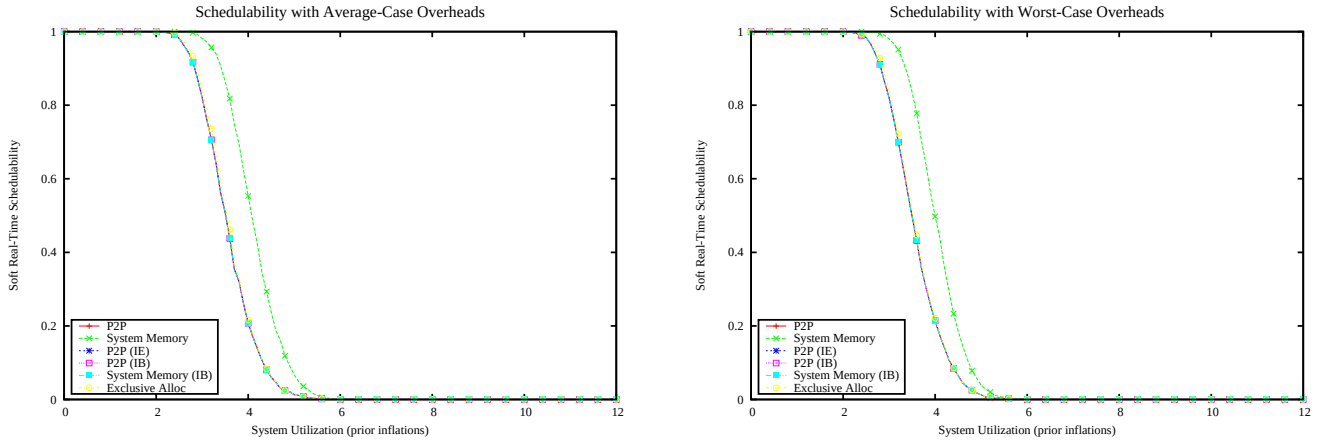

Figure 465: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

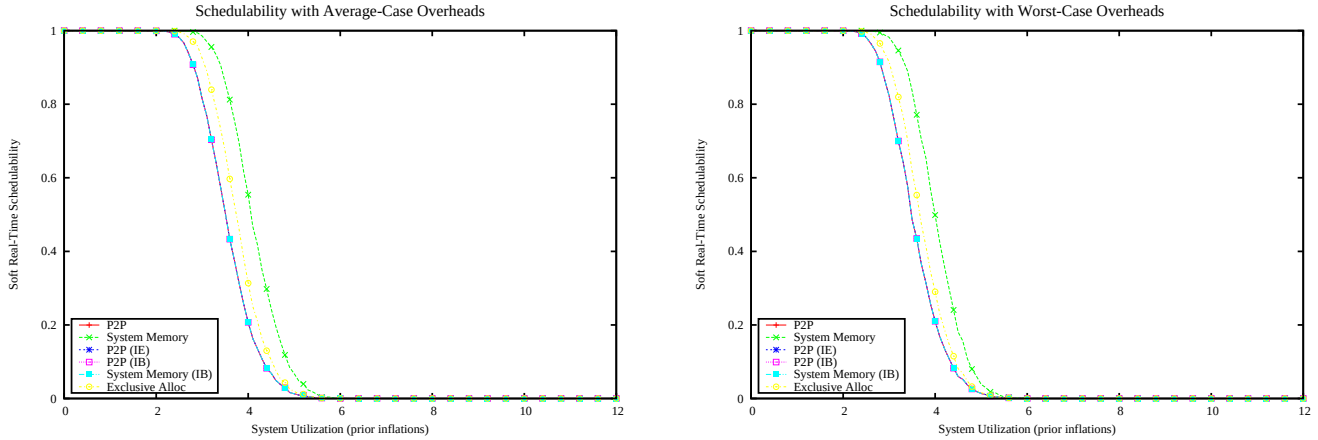

Figure 466: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

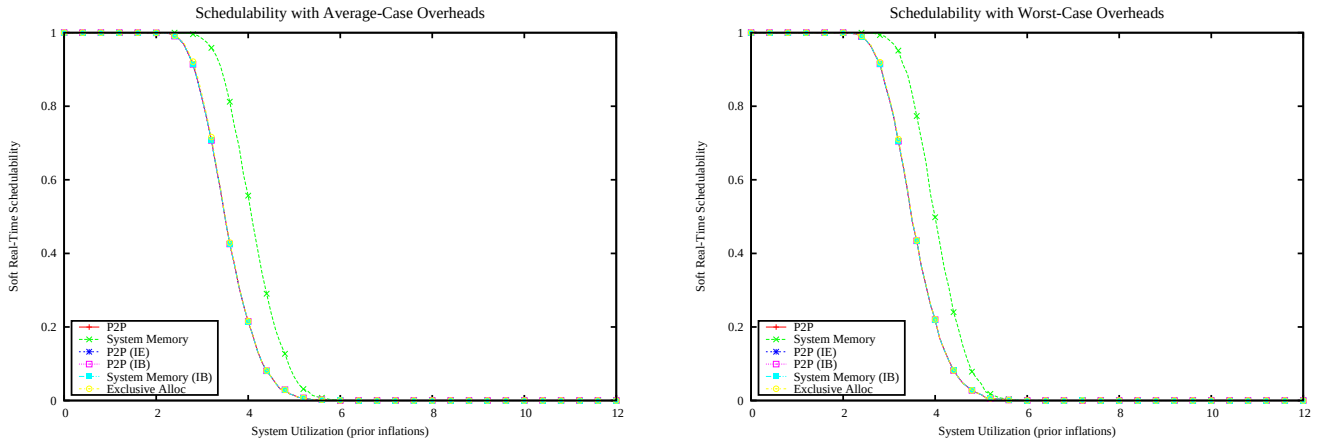

Figure 467: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

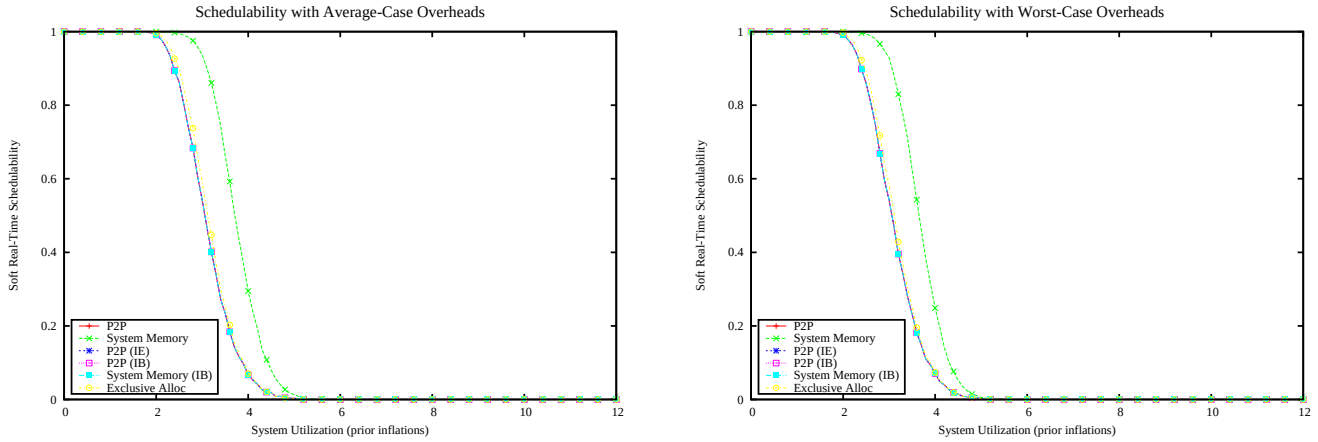

Figure 468: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

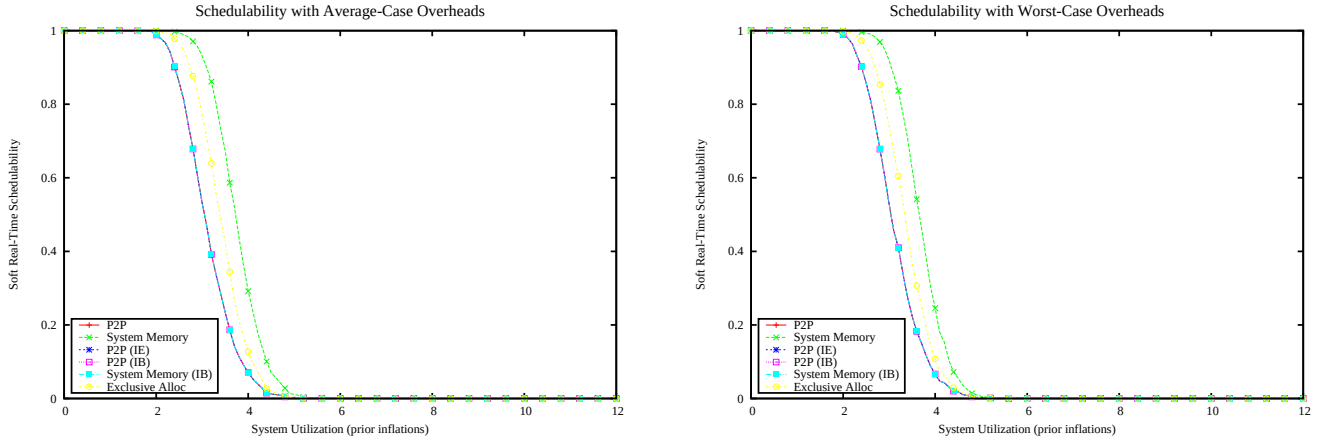

Figure 469: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

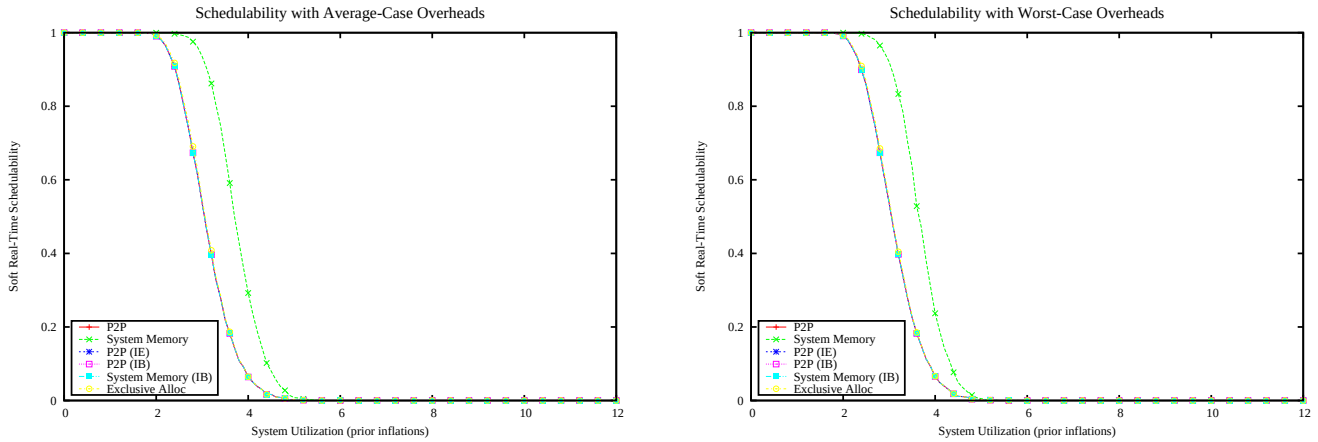

Figure 470: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

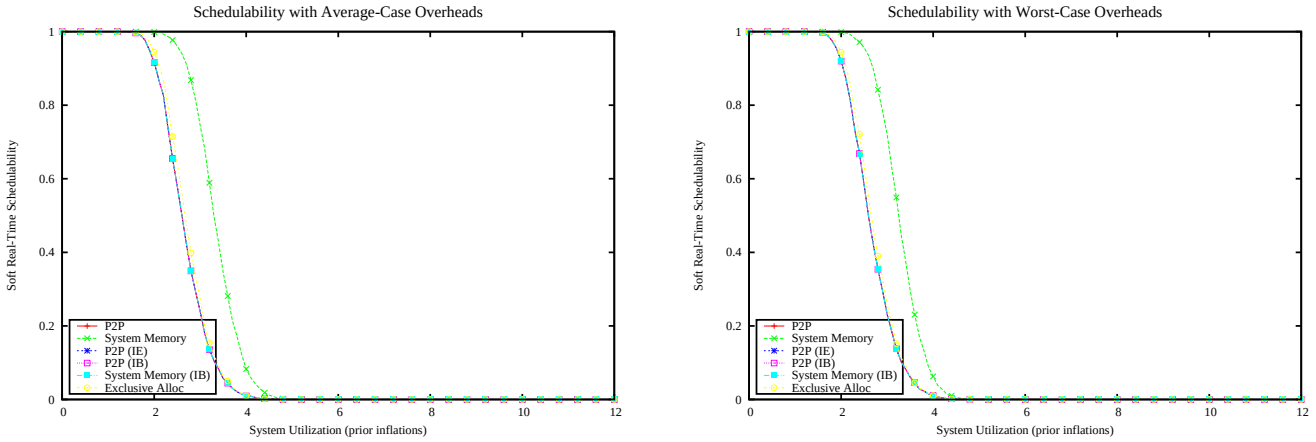

Figure 471: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

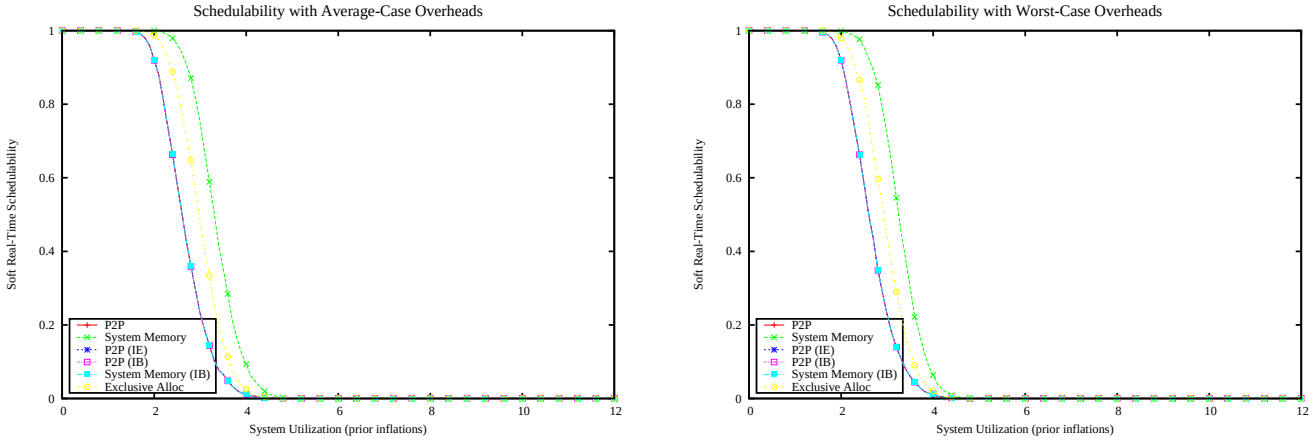

Figure 472: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

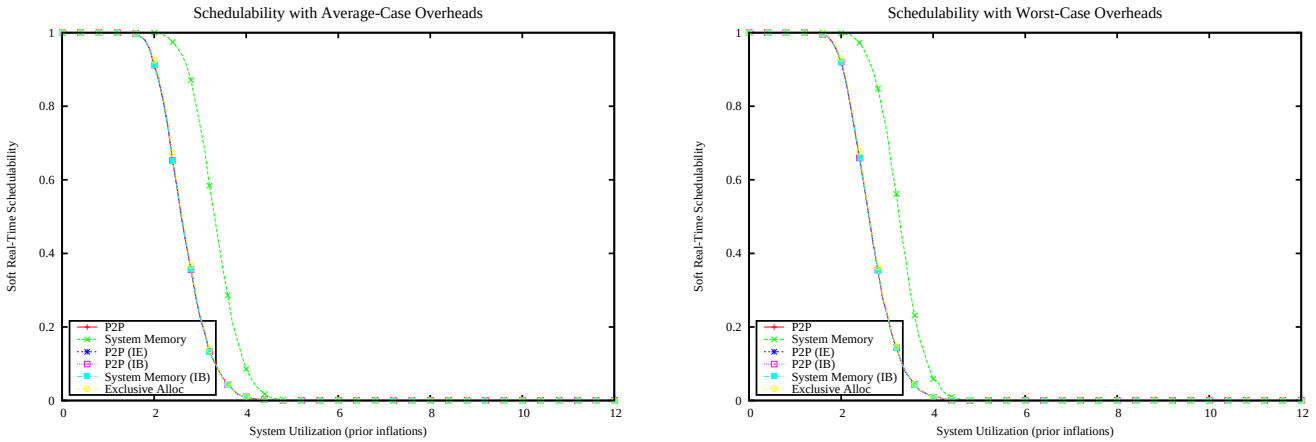

Figure 473: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

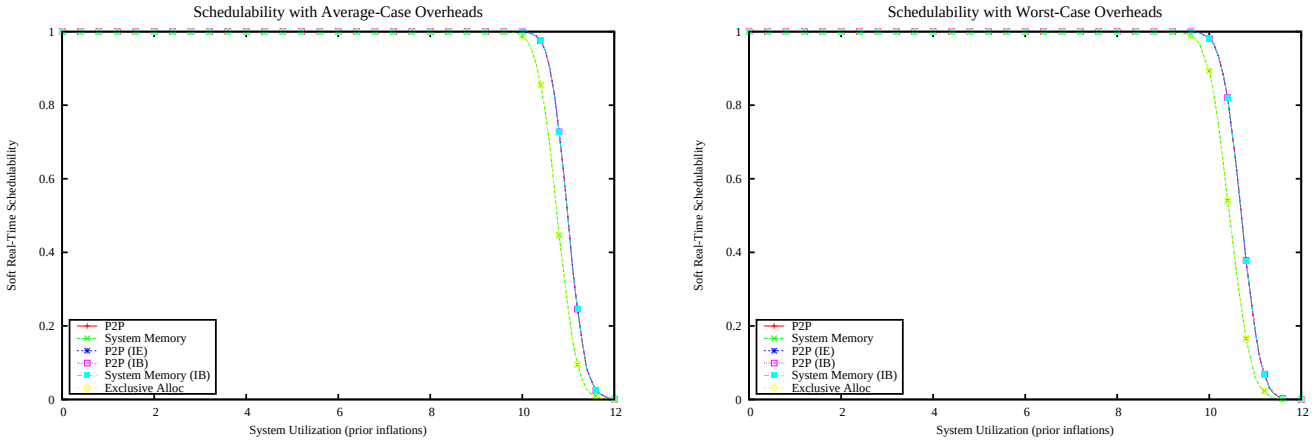

Figure 474: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

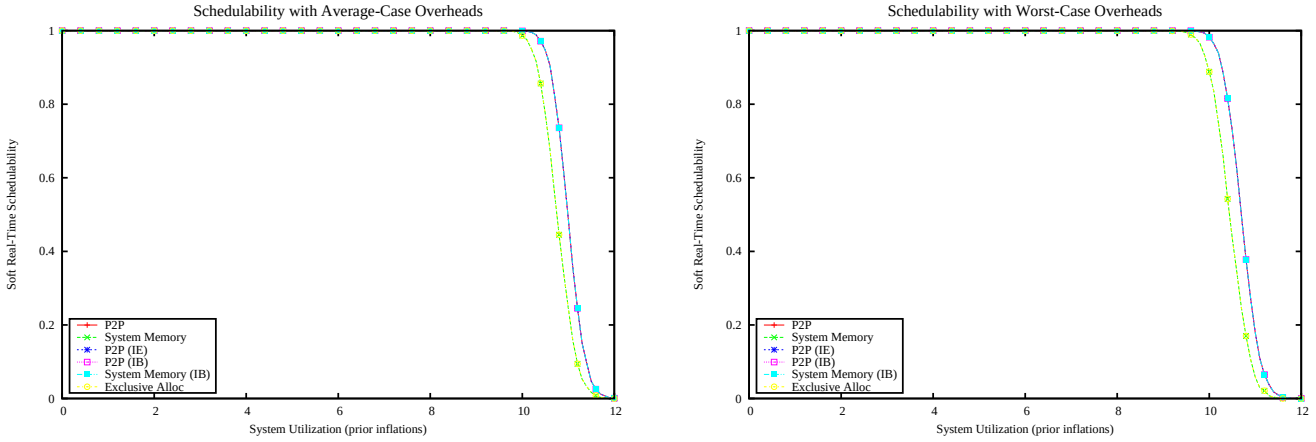

Figure 475: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

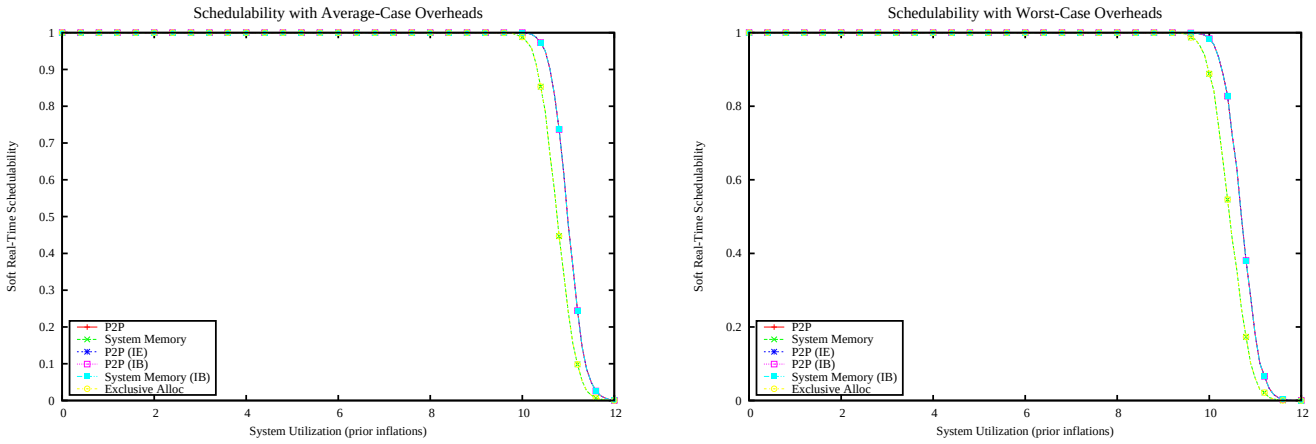

Figure 476: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

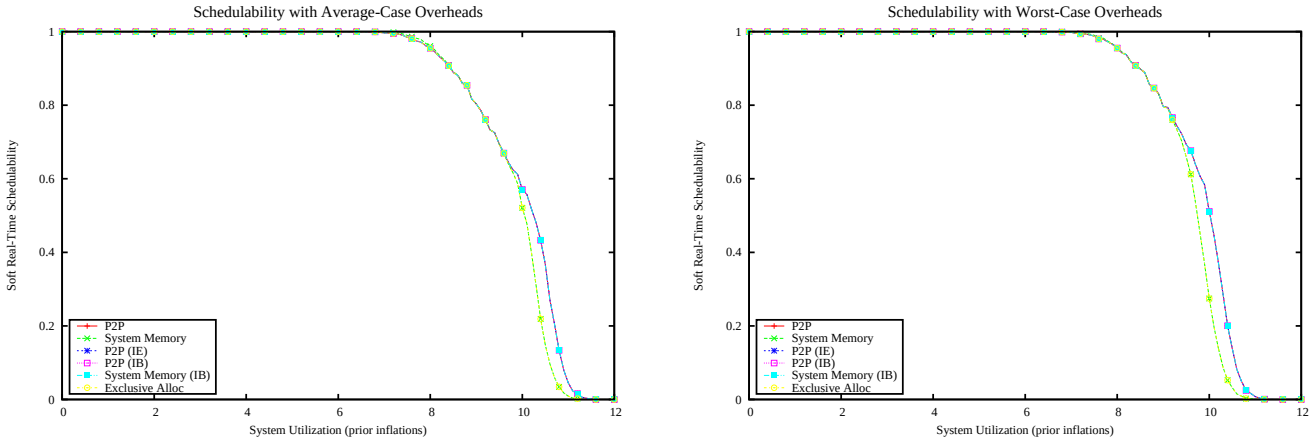

Figure 477: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

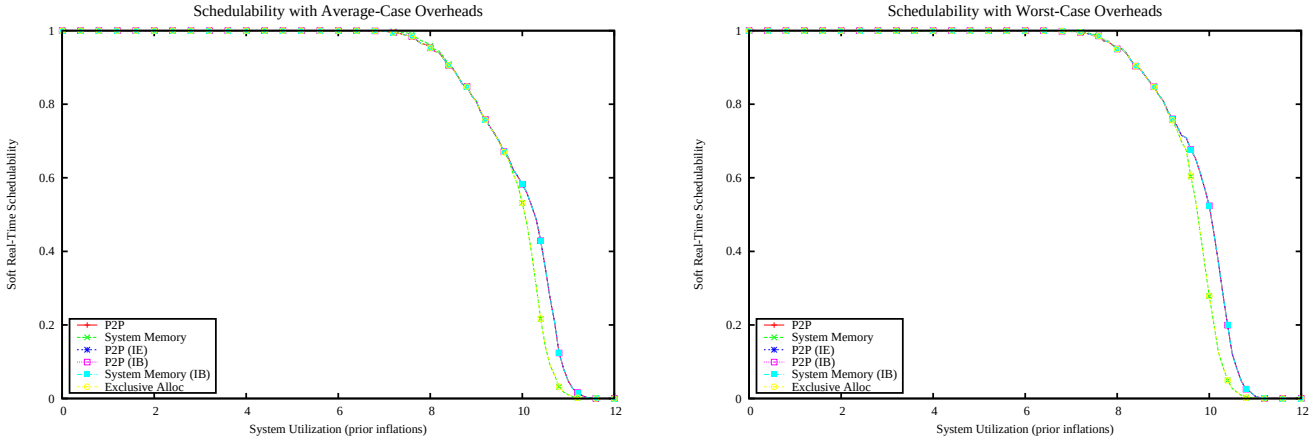

Figure 478: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

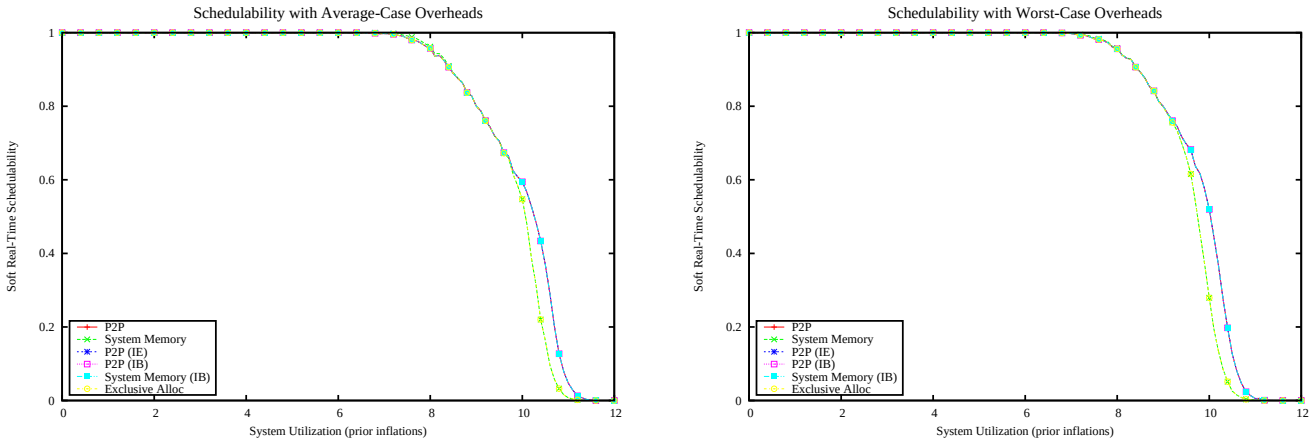

Figure 479: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

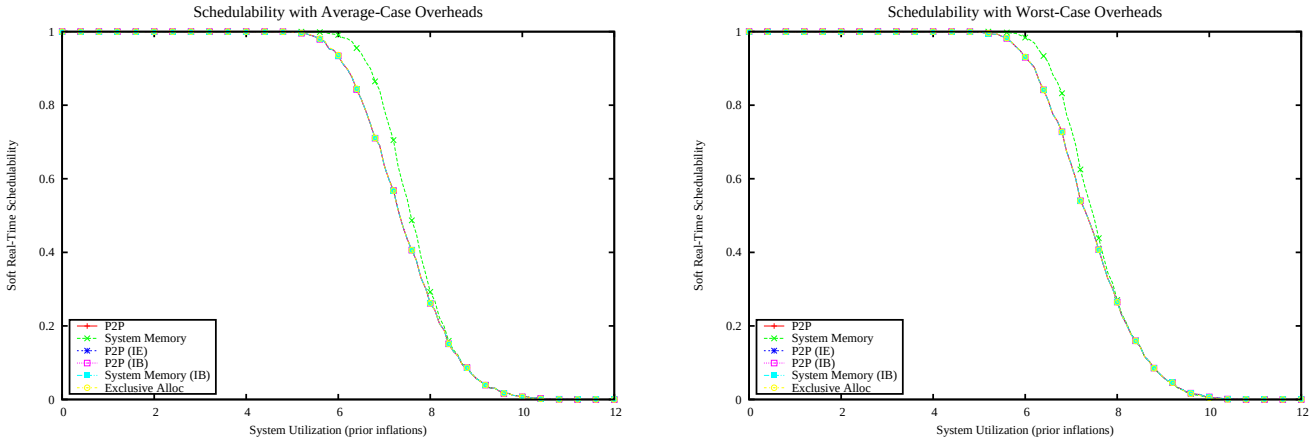

Figure 480: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

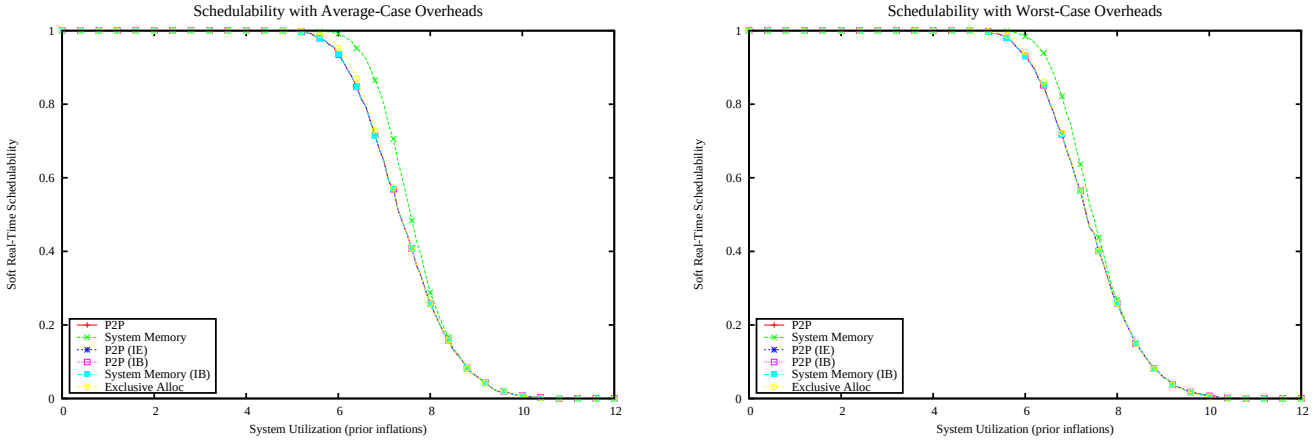

Figure 481: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

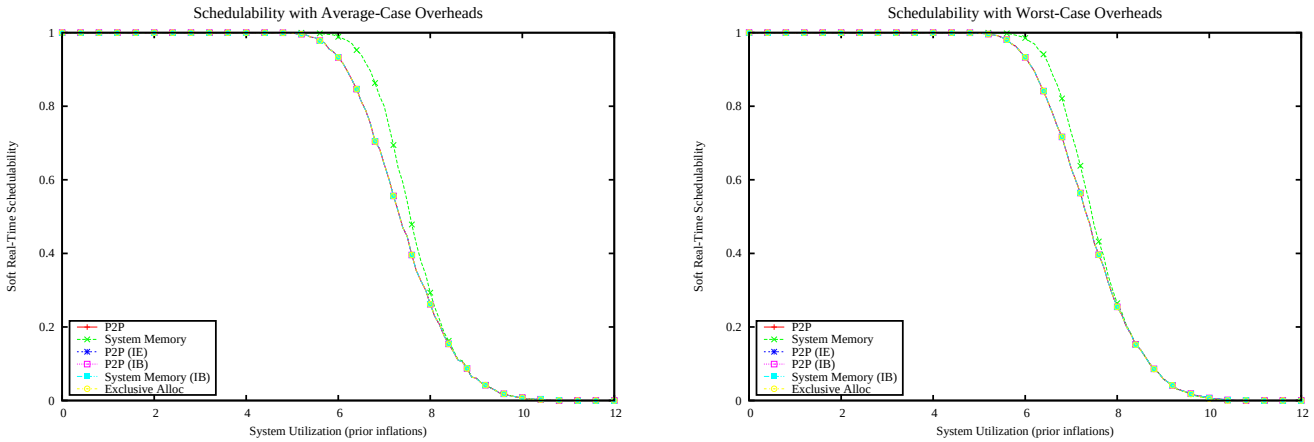

Figure 482: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

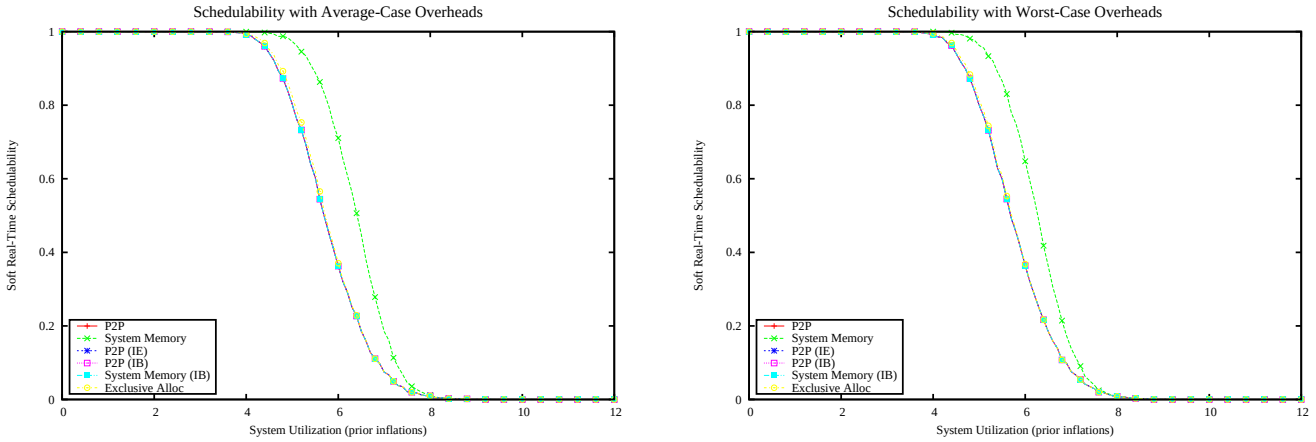

Figure 483: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

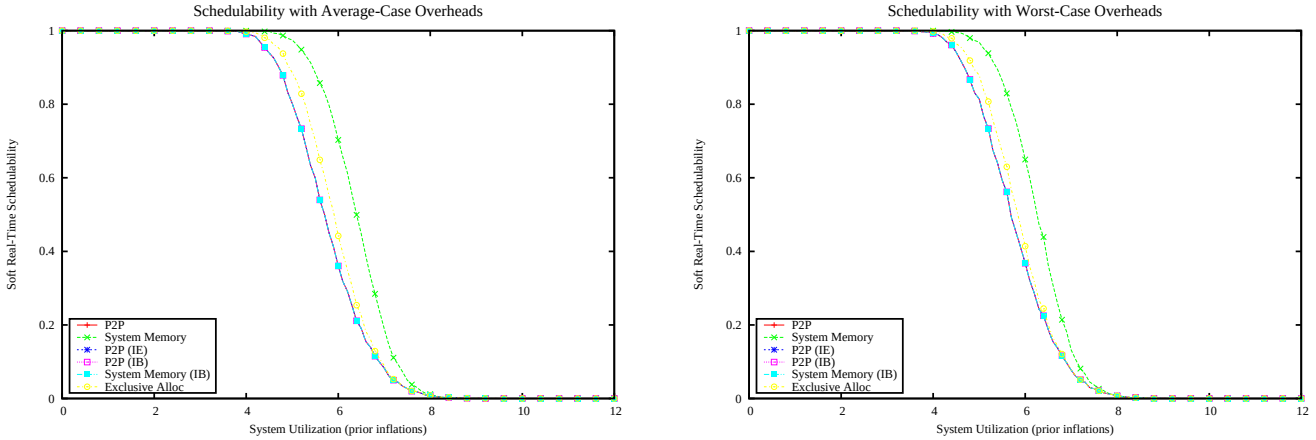

Figure 484: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

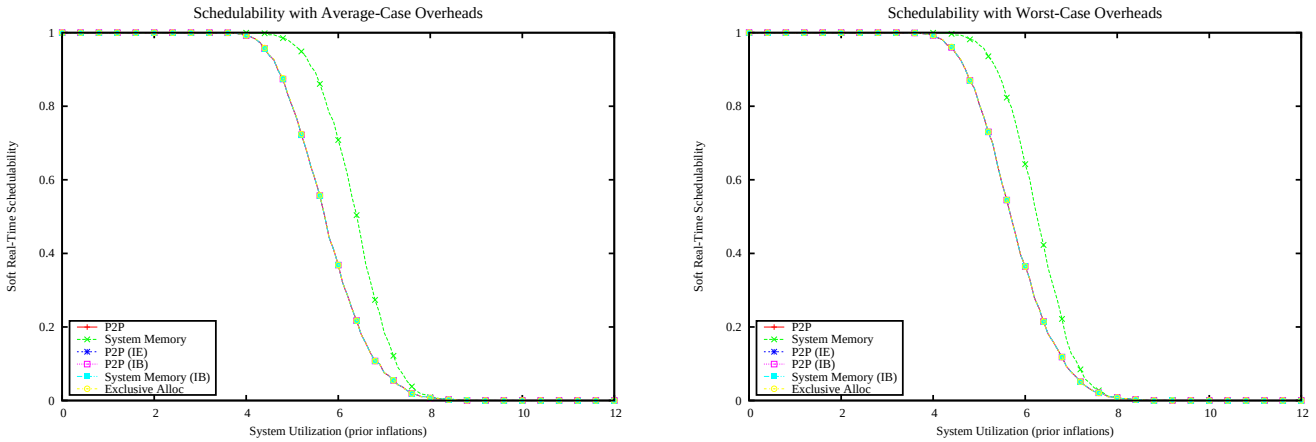

Figure 485: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

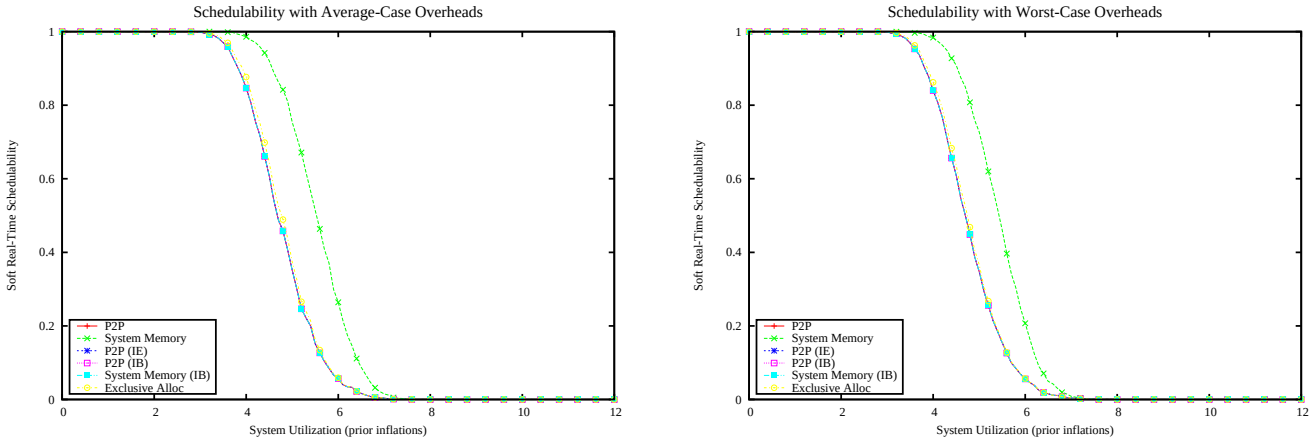

Figure 486: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

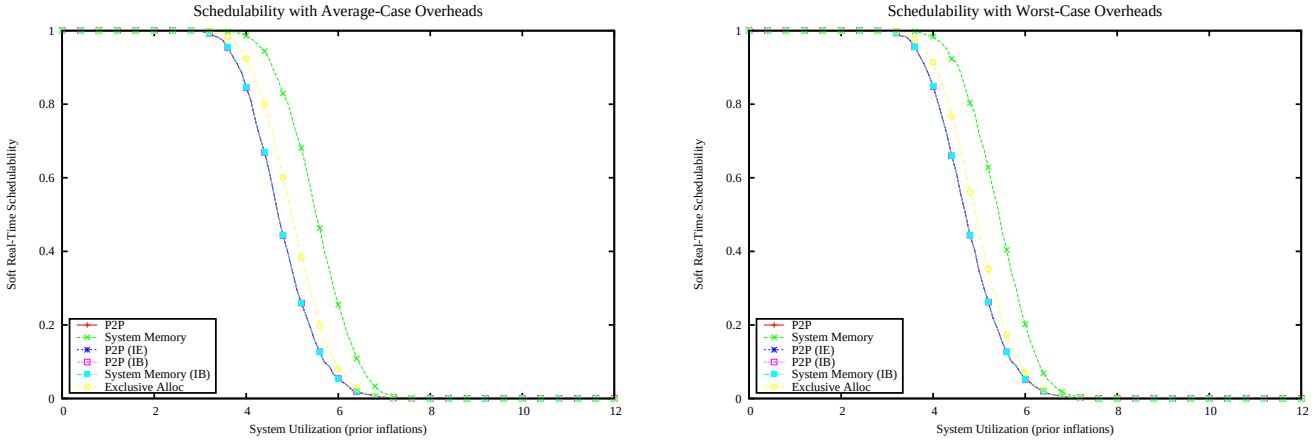

Figure 487: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

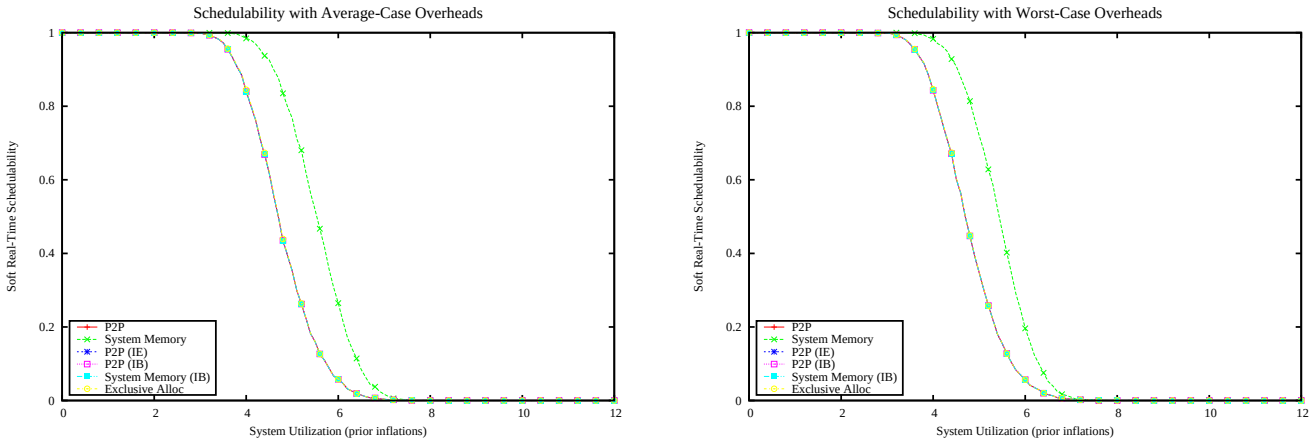

Figure 488: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

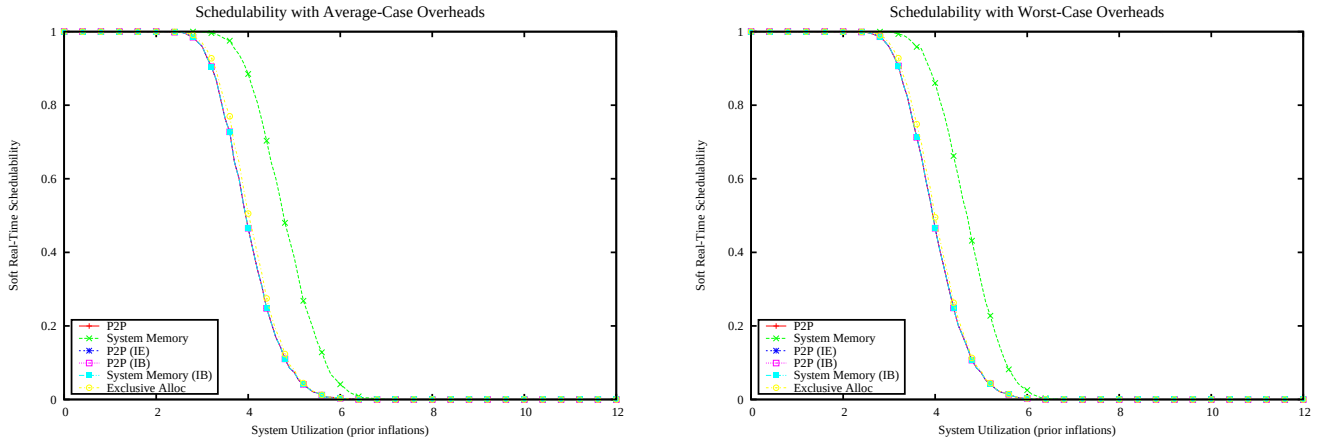

Figure 489: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

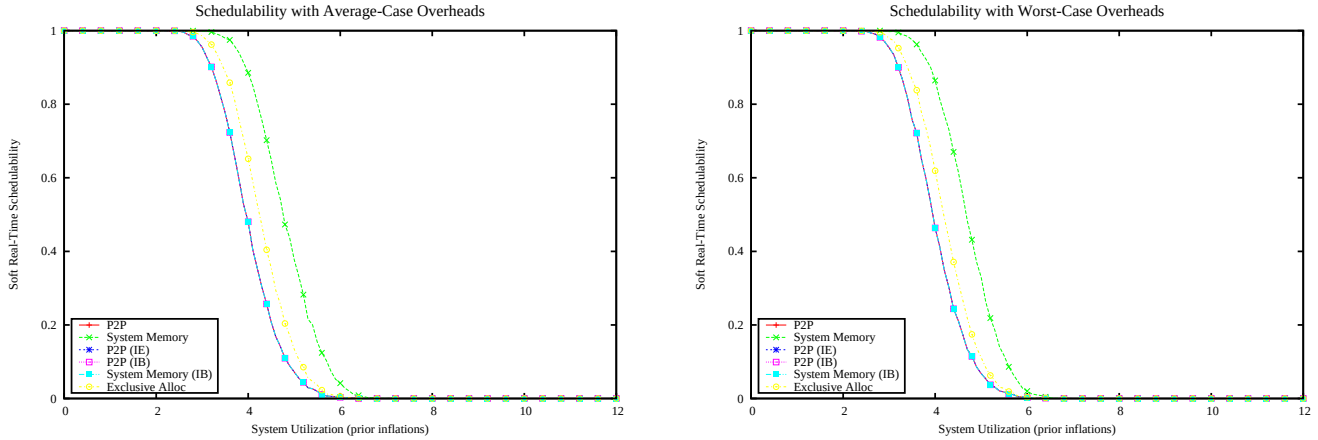

Figure 490: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

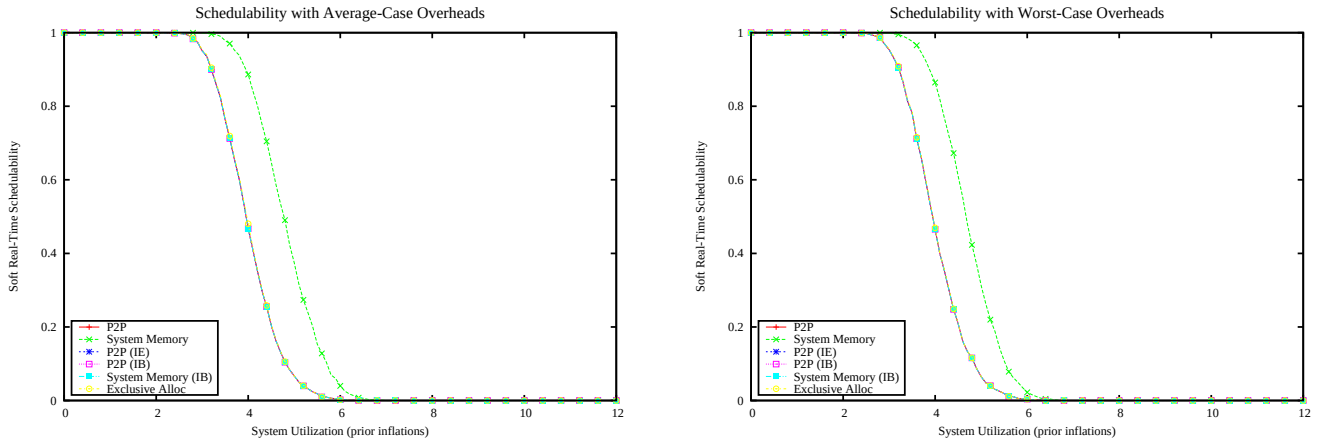

Figure 491: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

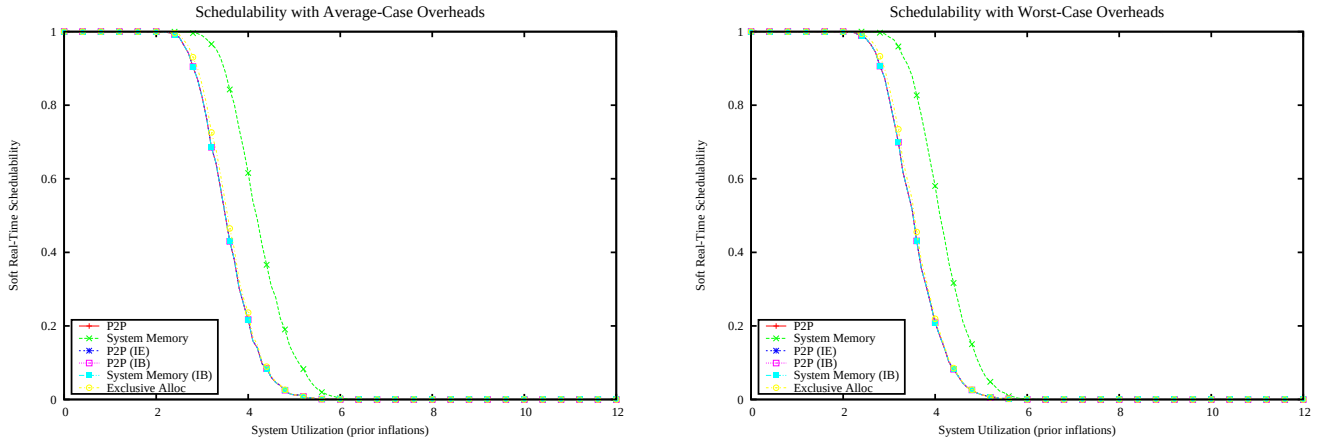

Figure 492: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

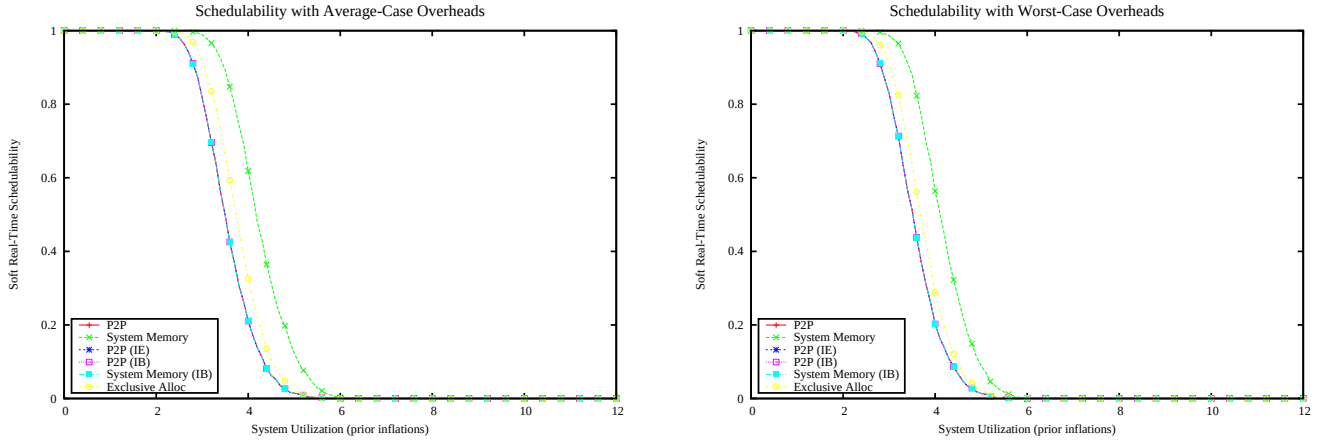

Figure 493: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

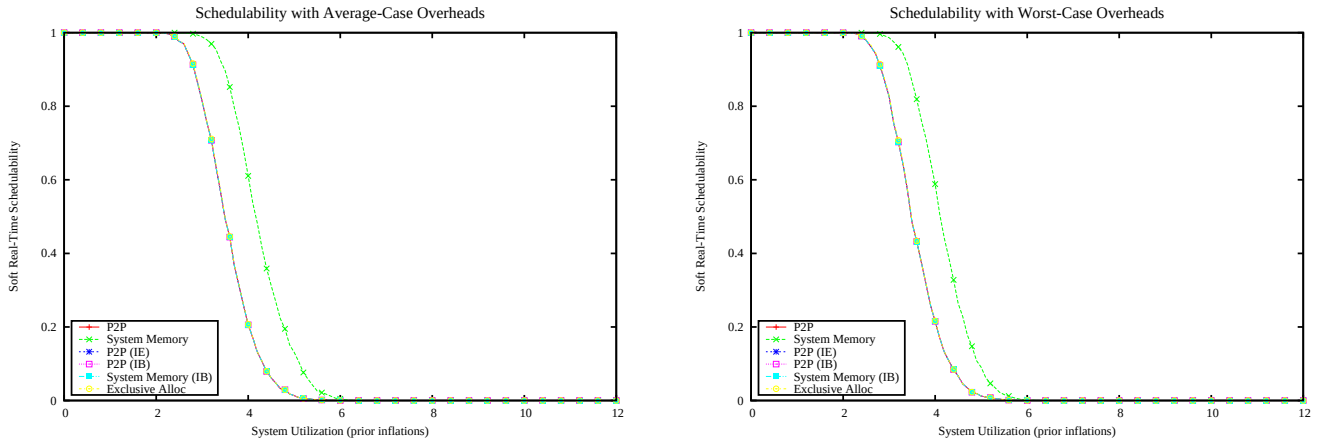

Figure 494: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

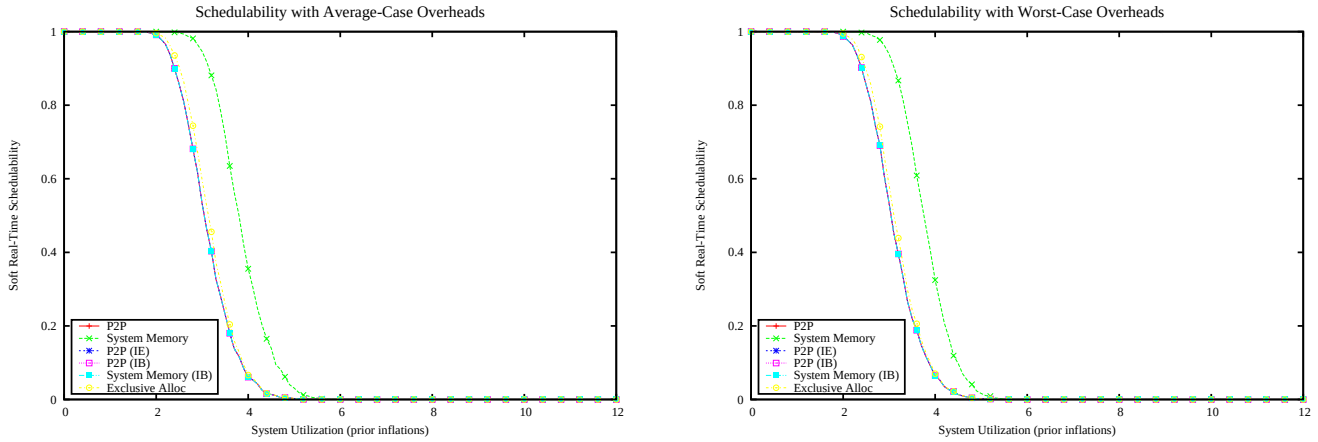

Figure 495: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

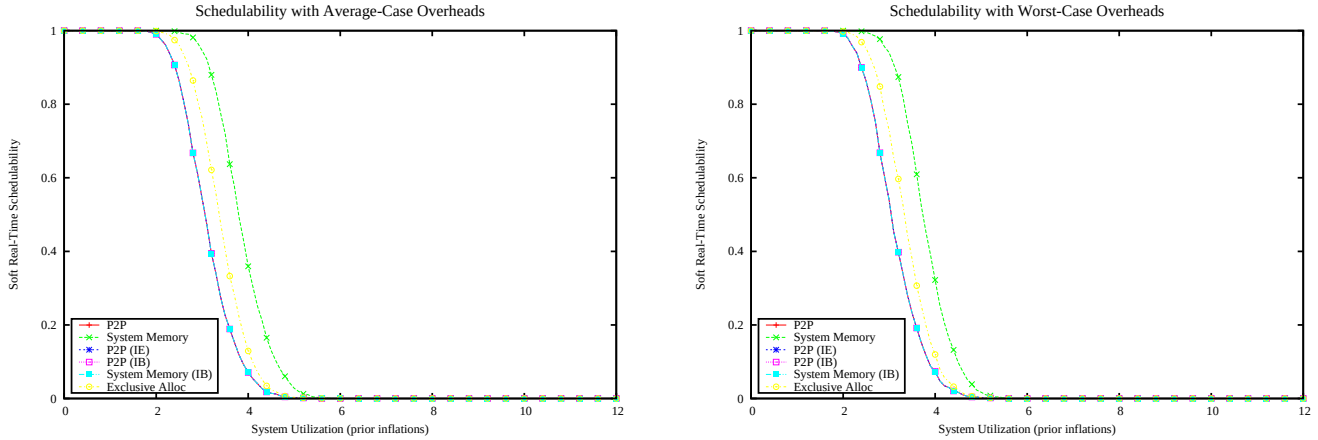

Figure 496: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

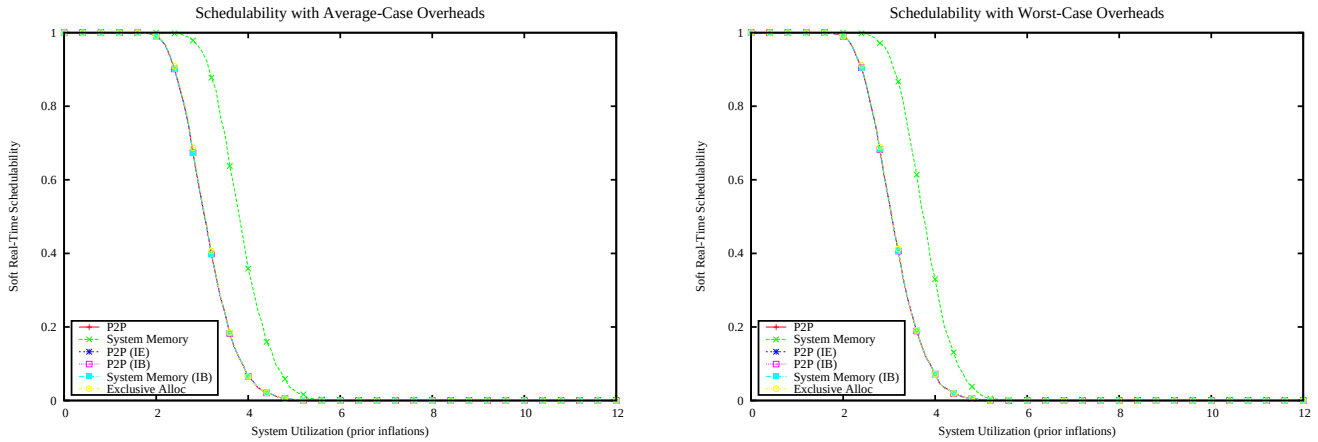

Figure 497: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

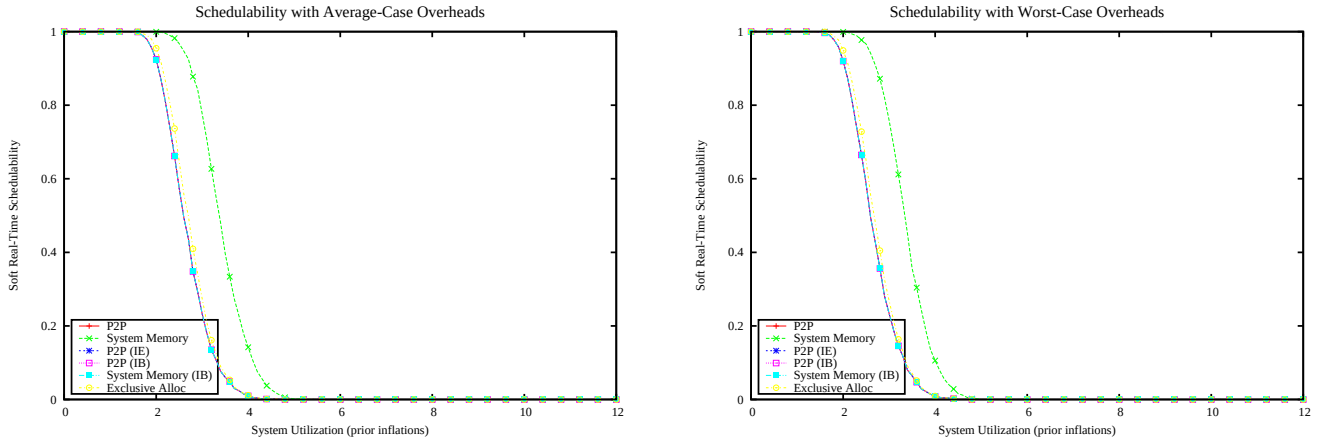

Figure 498: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

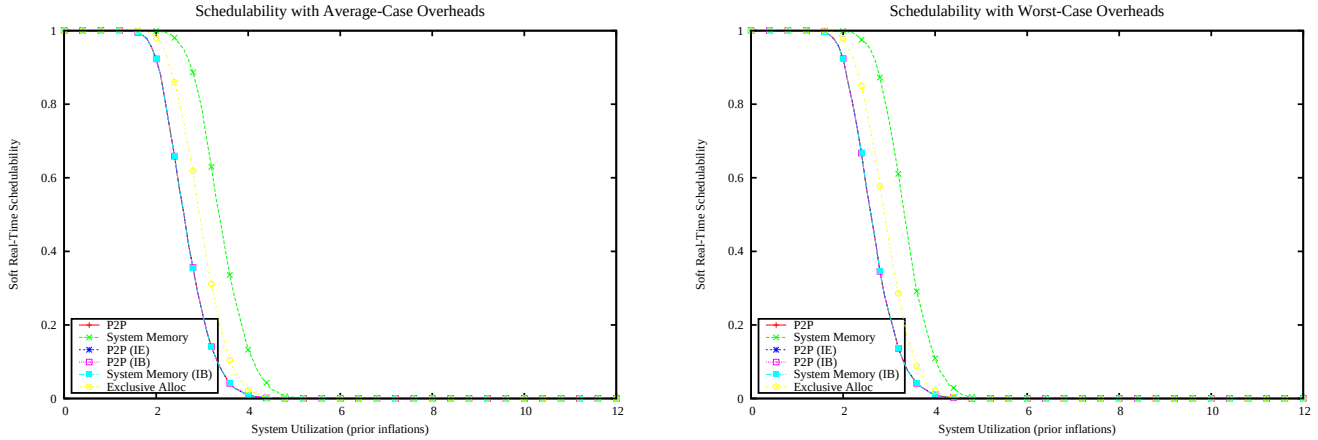

Figure 499: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

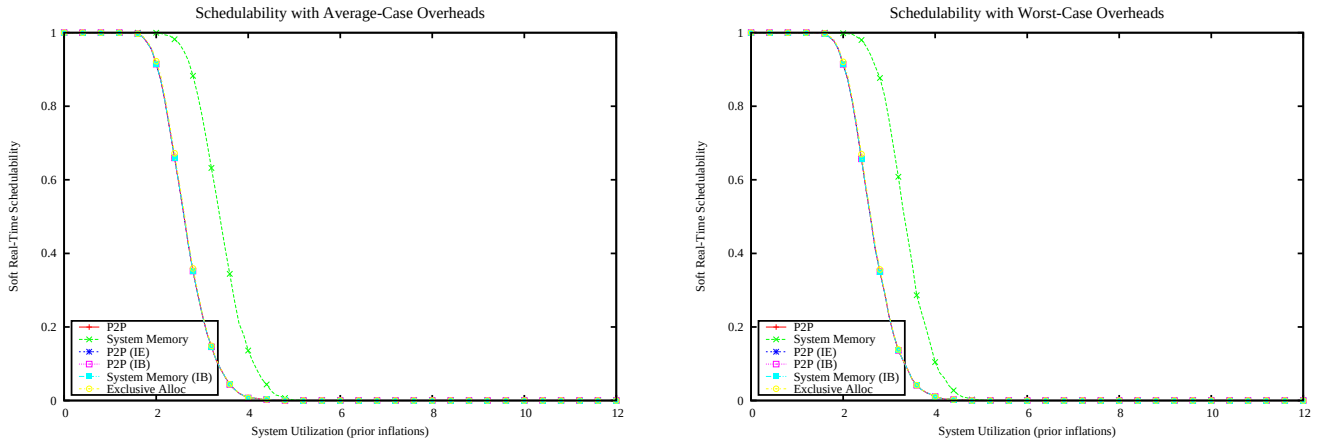

Figure 500: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

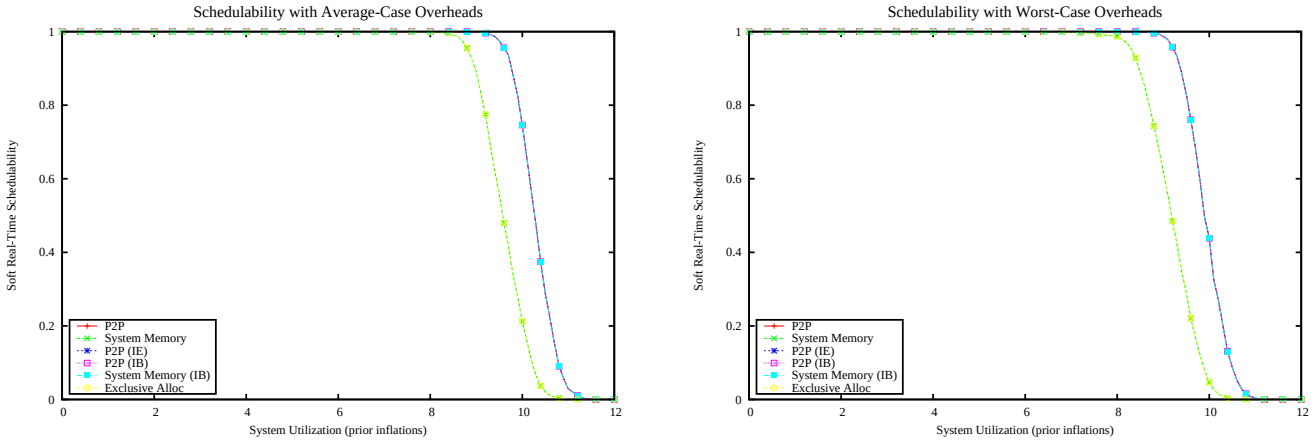

Figure 501: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

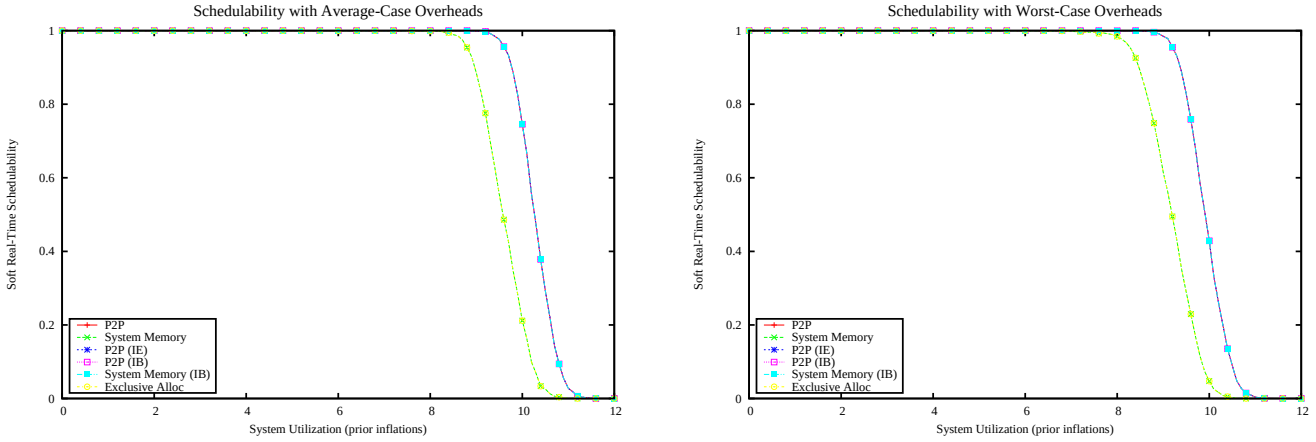

Figure 502: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

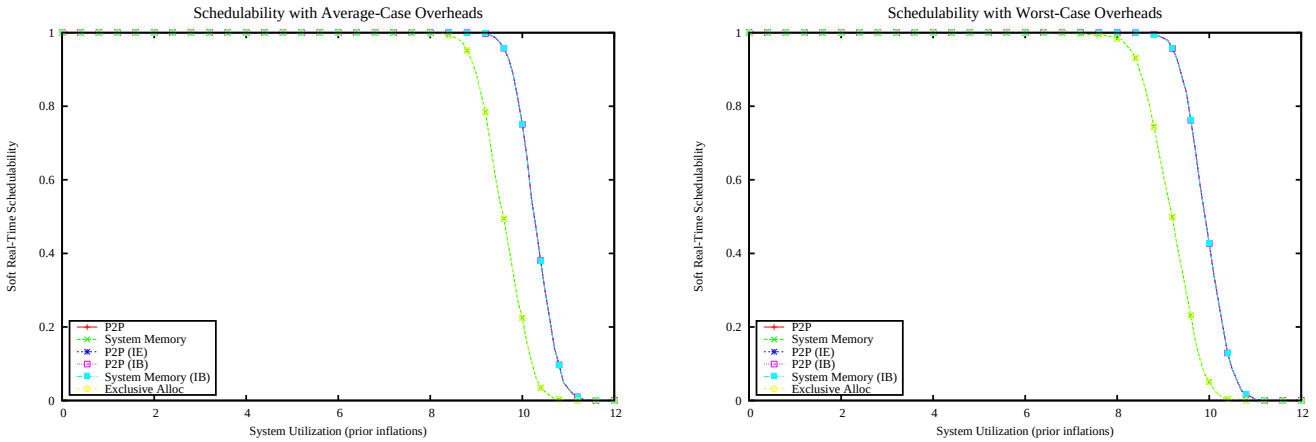

Figure 503: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

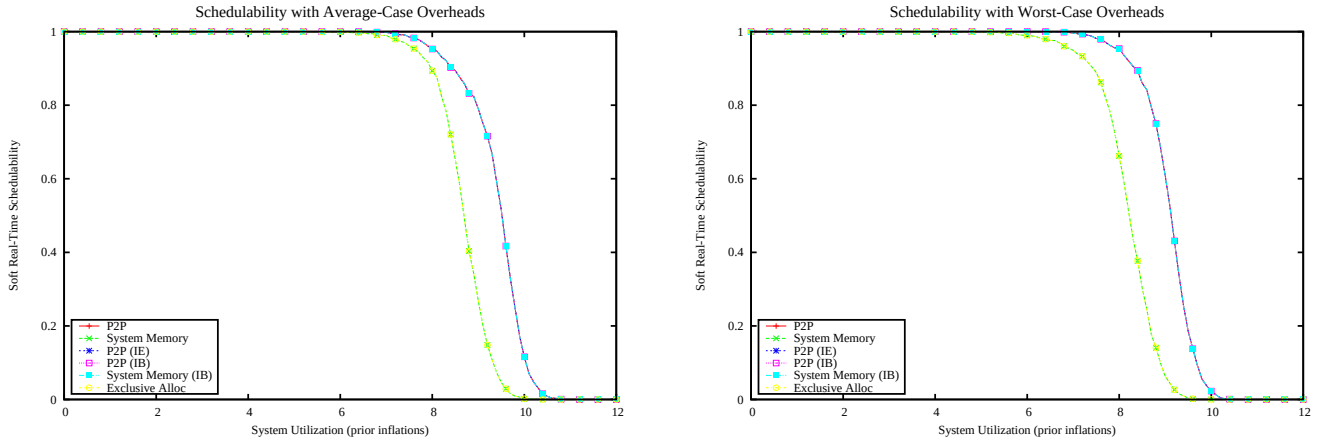

Figure 504: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

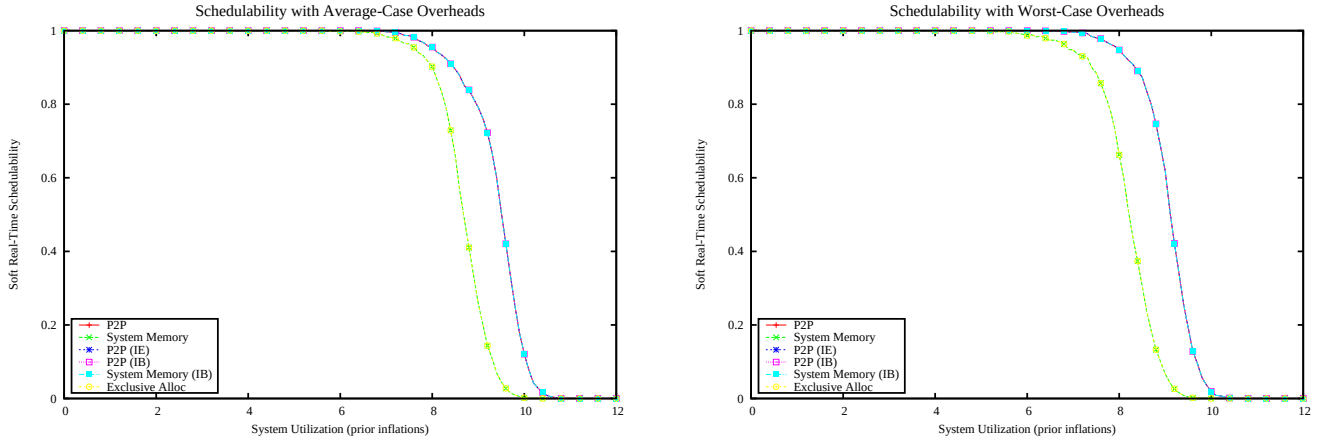

Figure 505: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

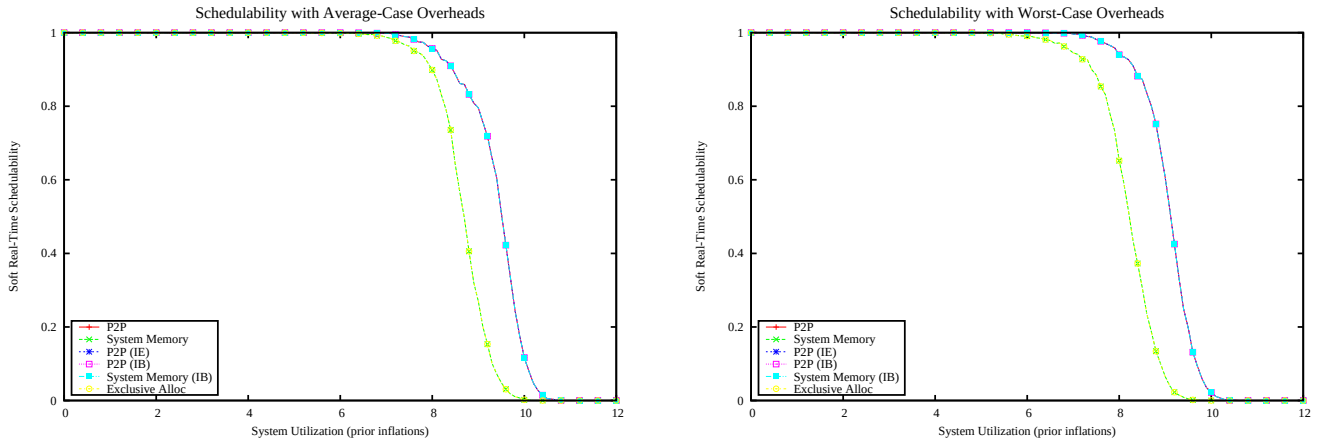

Figure 506: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

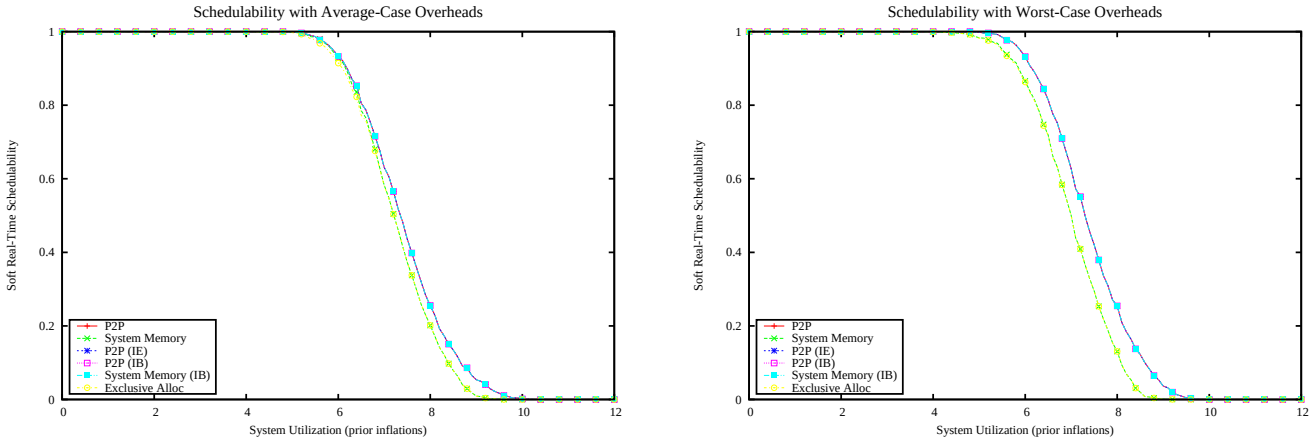

Figure 507: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

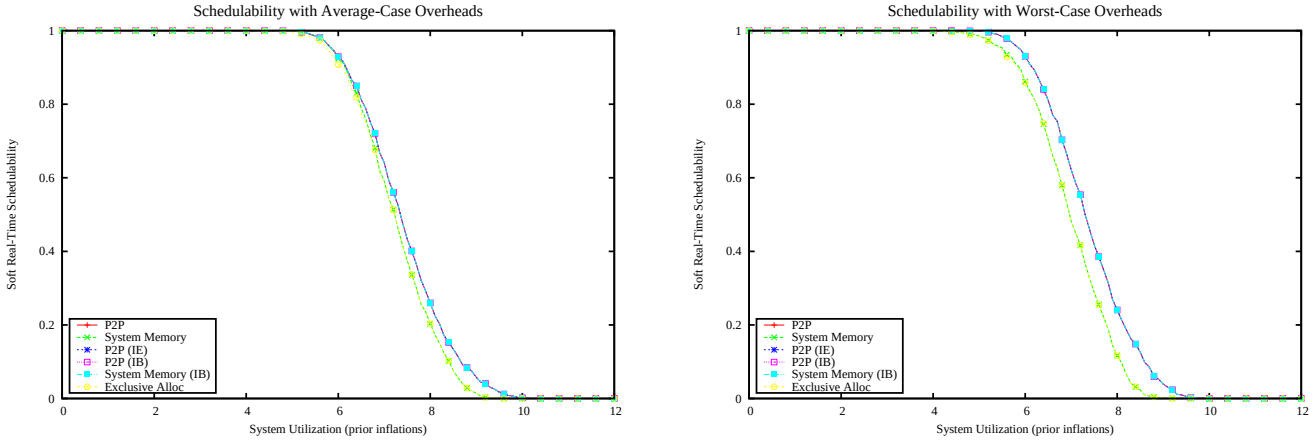

Figure 508: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

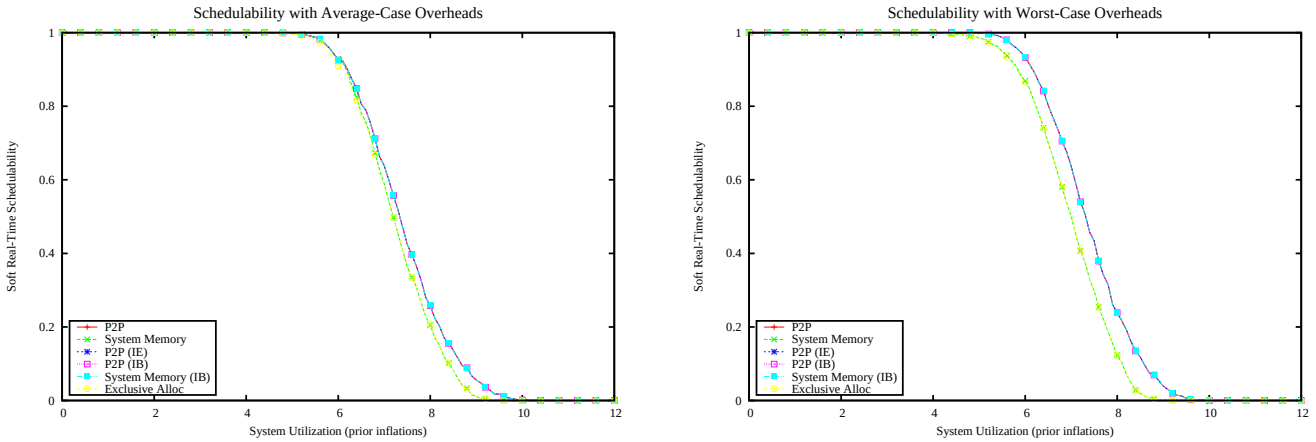

Figure 509: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

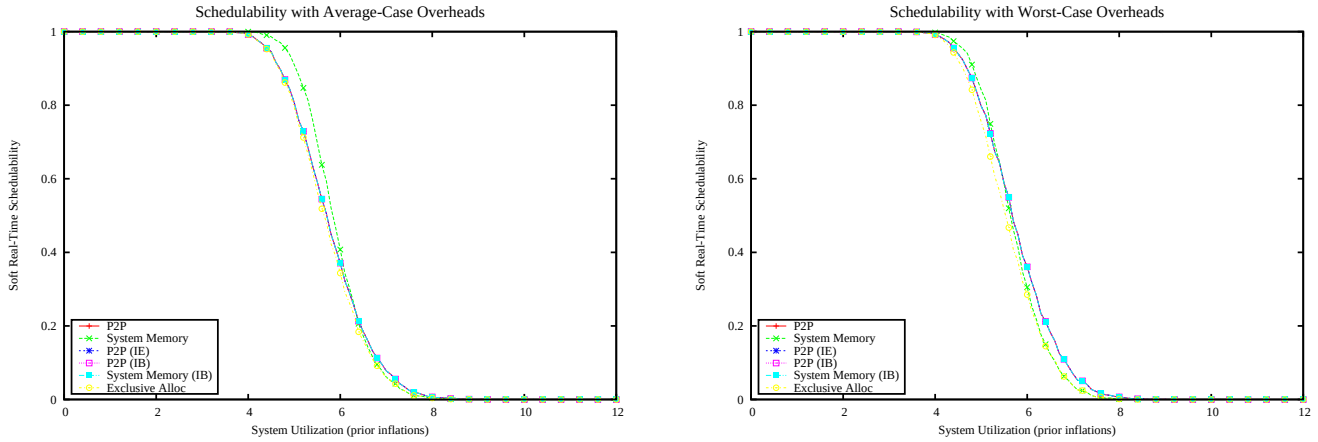

Figure 510: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

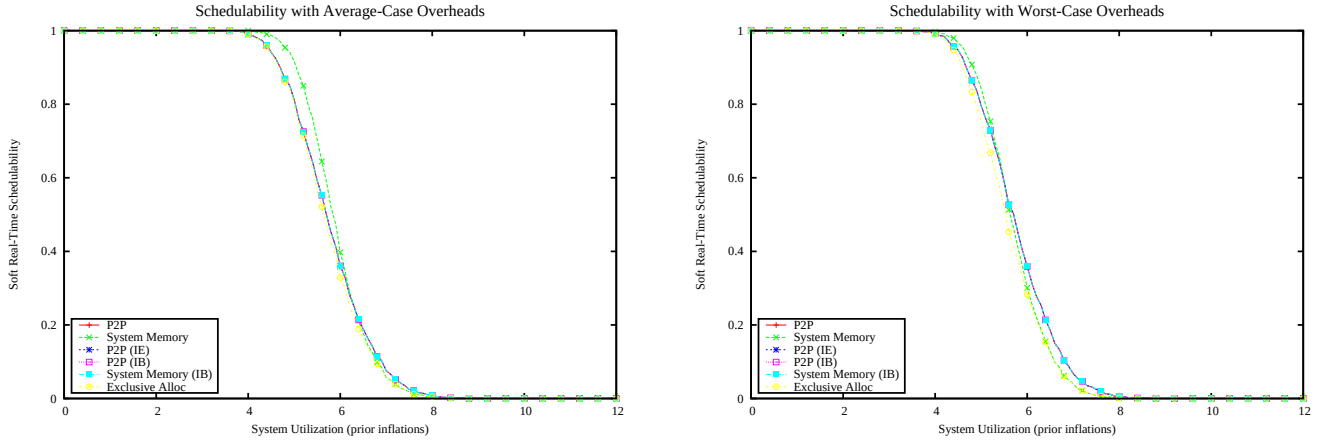

Figure 511: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

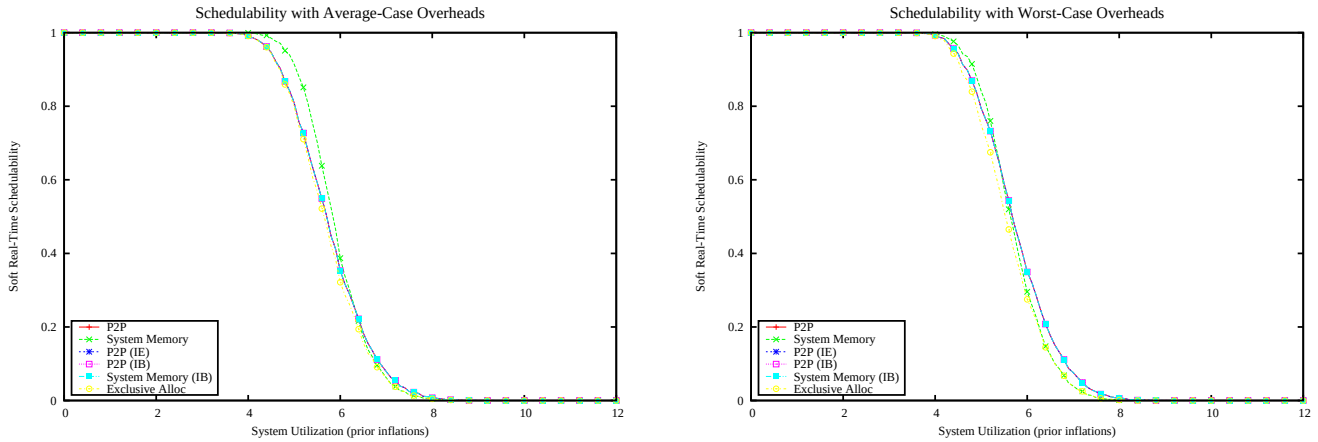

Figure 512: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

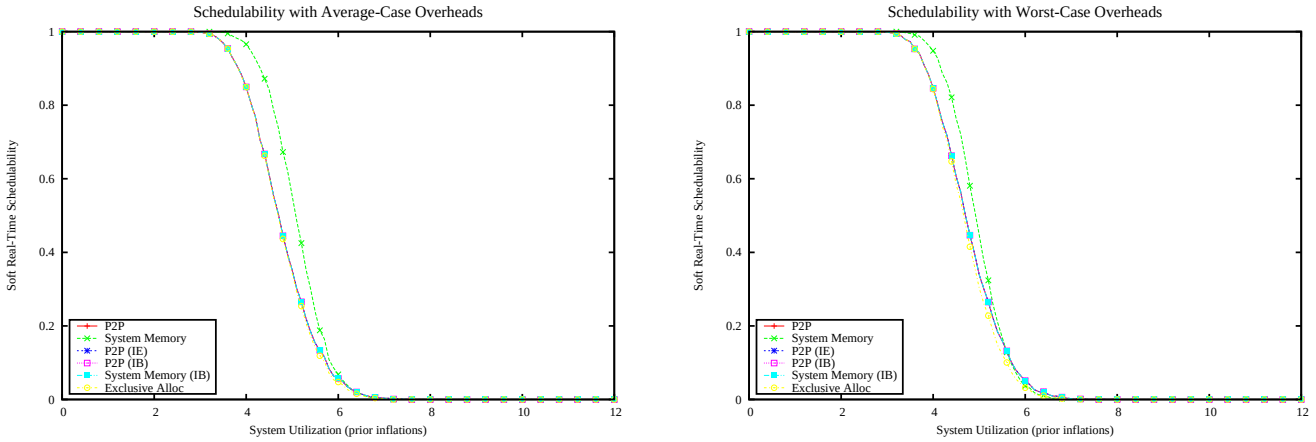

Figure 513: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

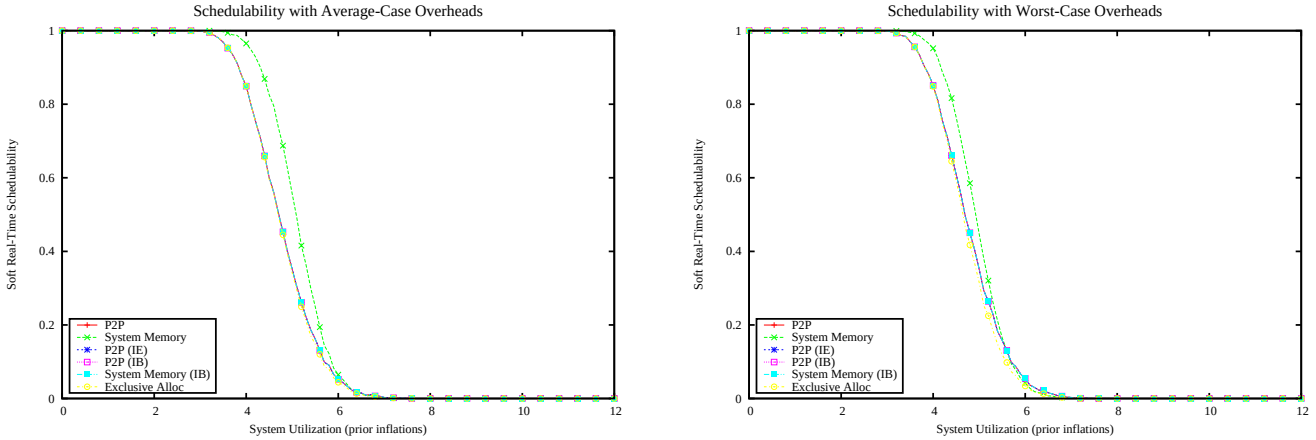

Figure 514: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

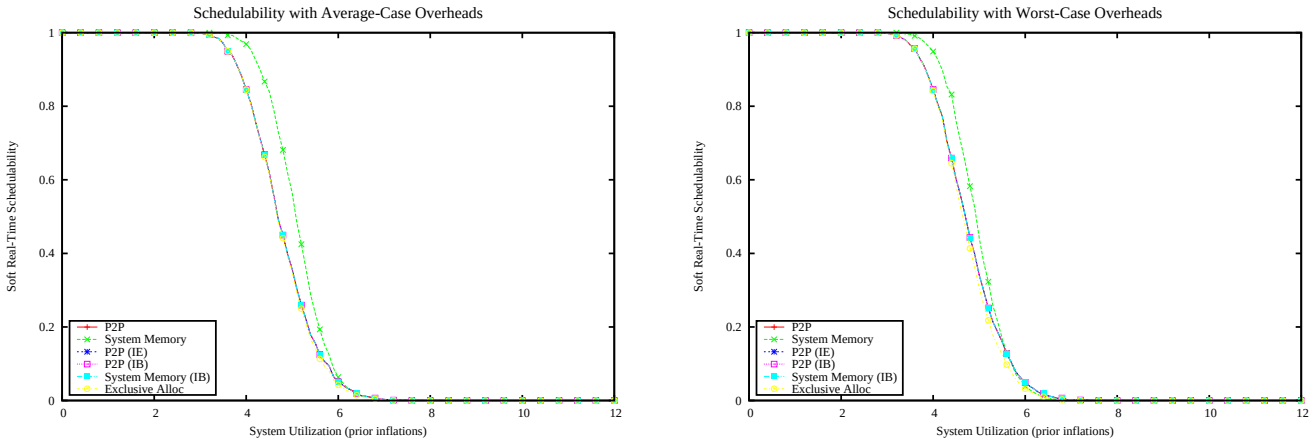

Figure 515: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

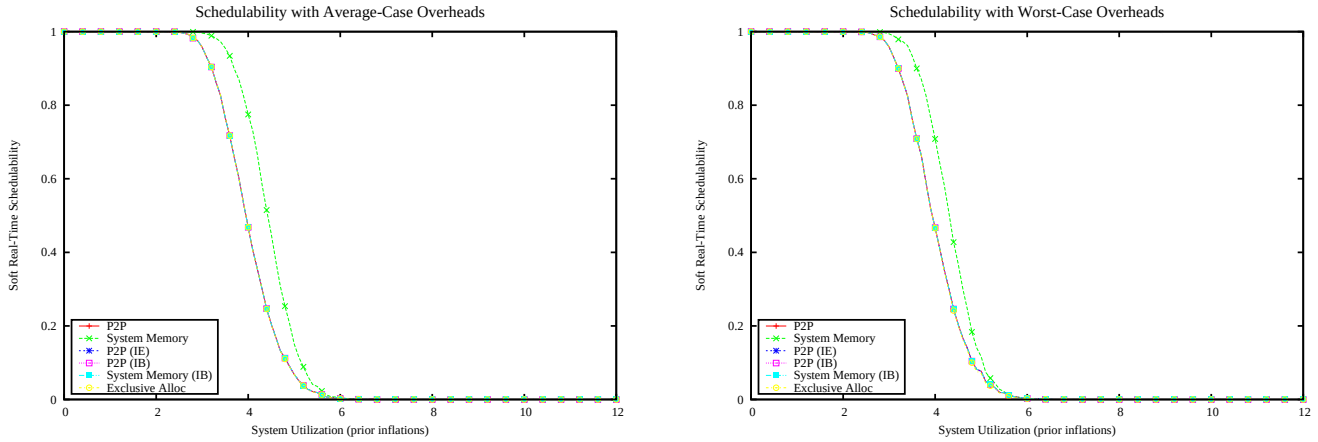

Figure 516: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

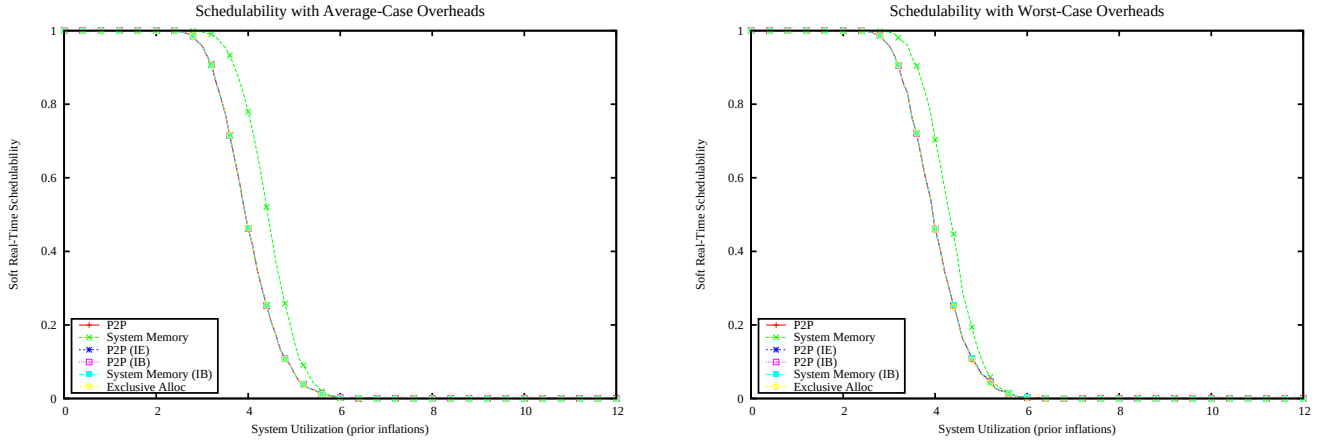

Figure 517: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

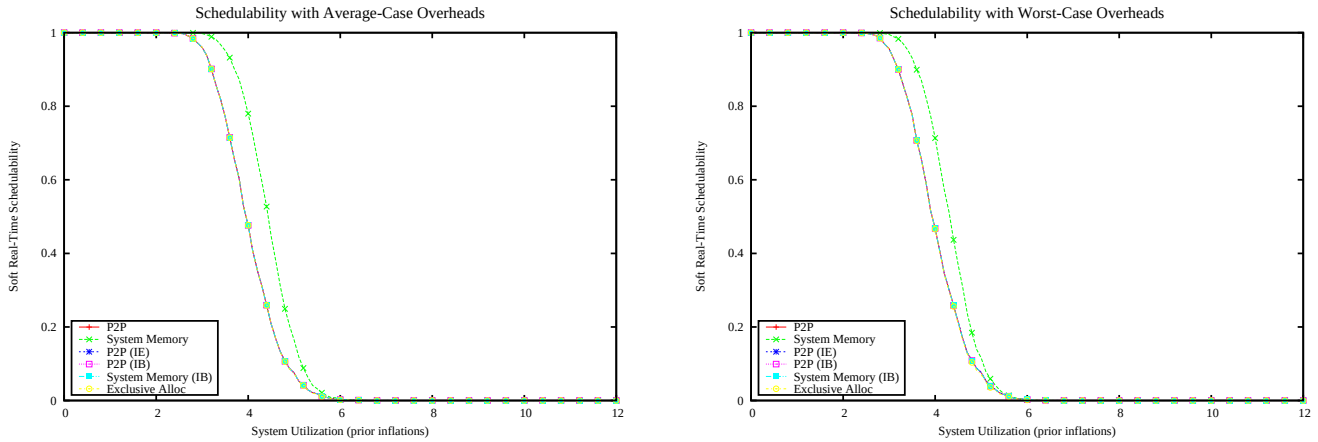

Figure 518: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

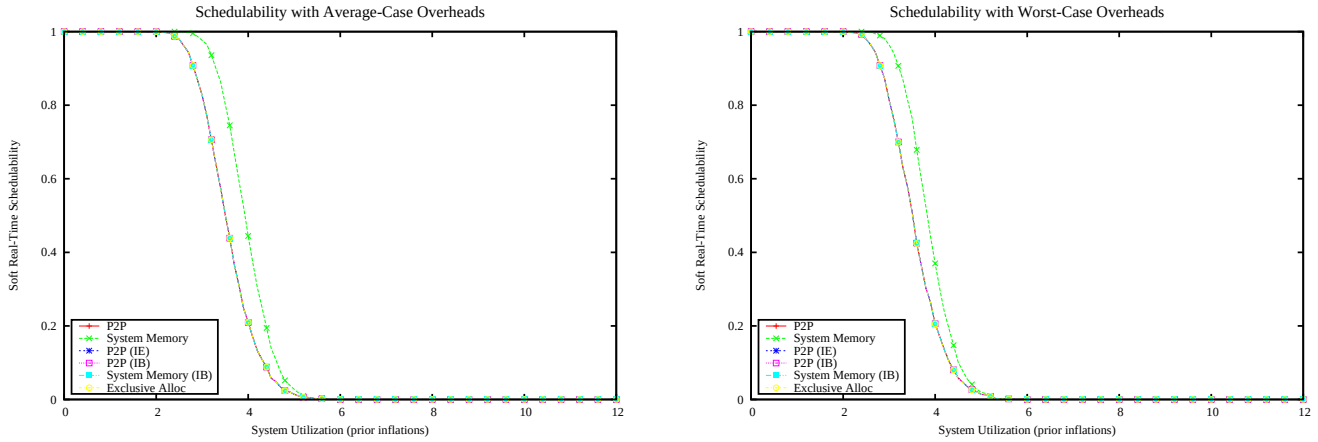

Figure 519: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

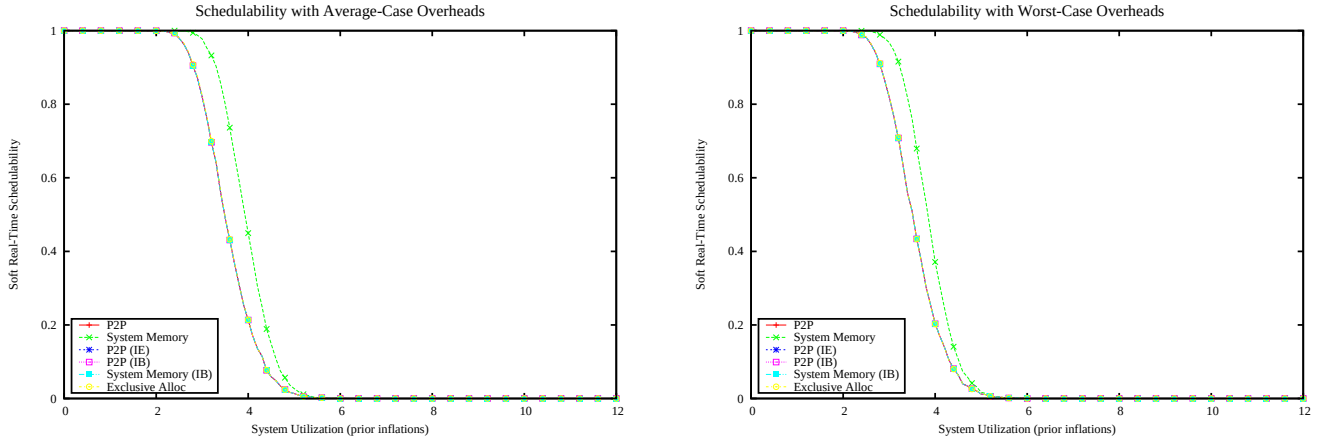

Figure 520: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

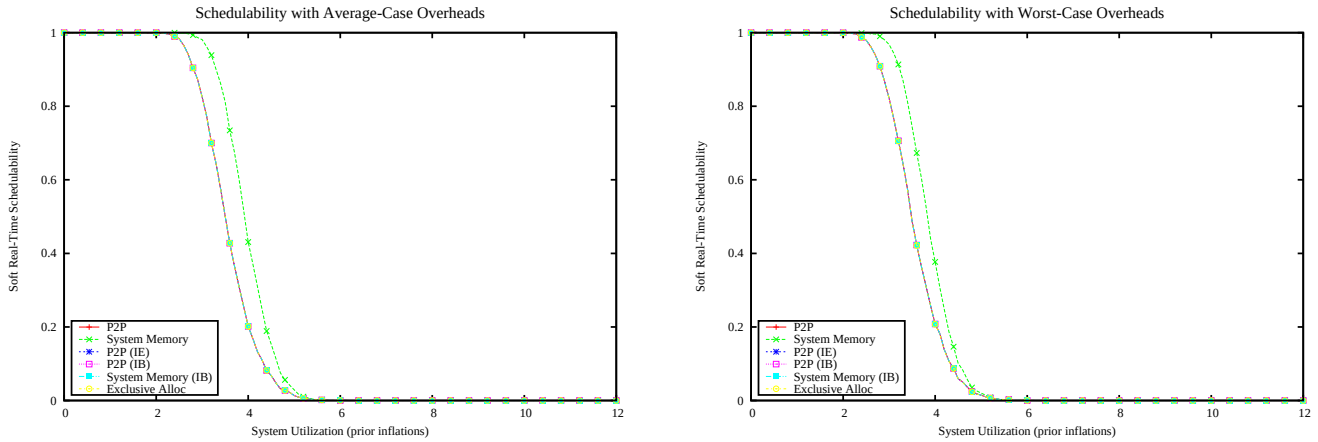

Figure 521: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

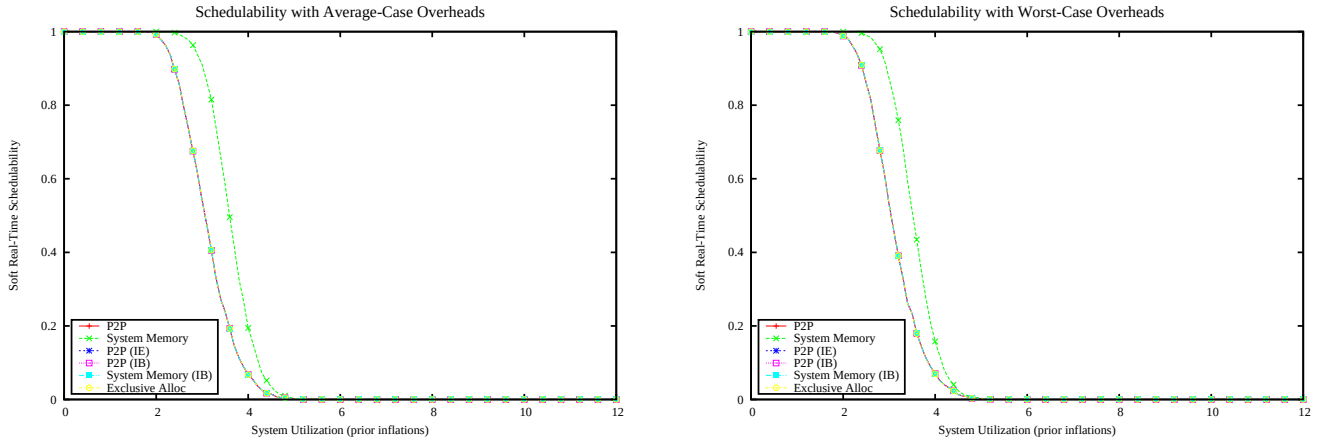

Figure 522: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

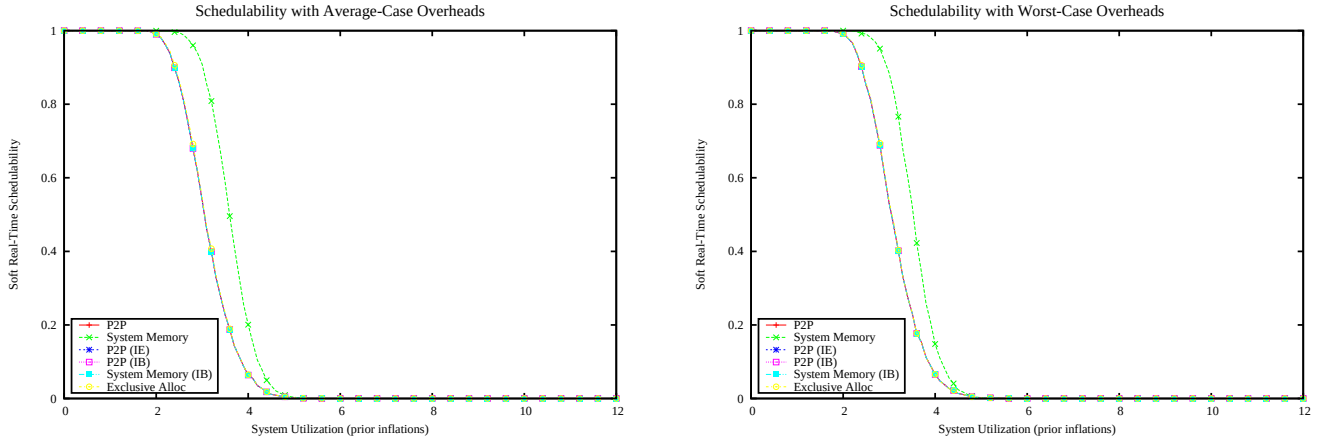

Figure 523: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

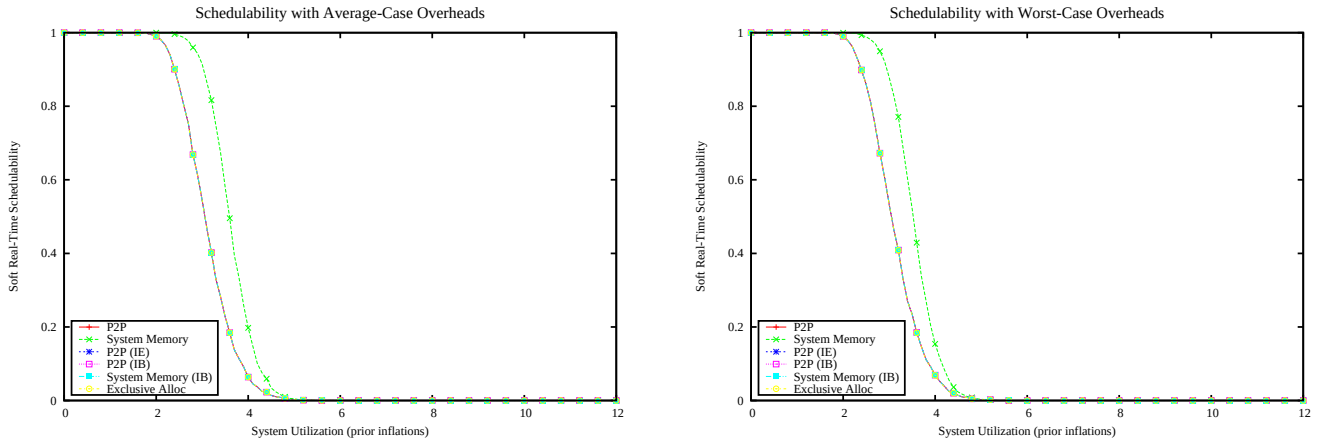

Figure 524: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

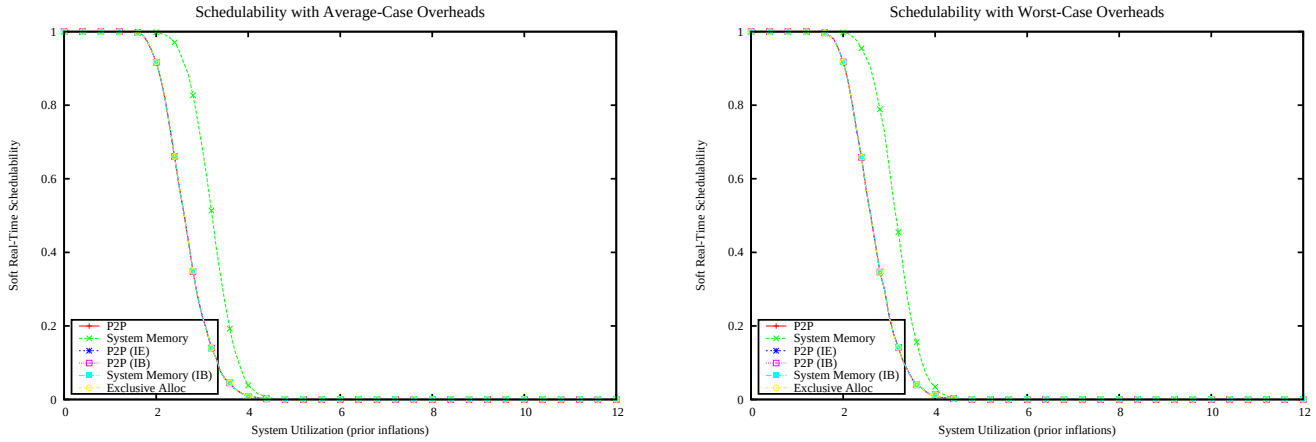

Figure 525: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

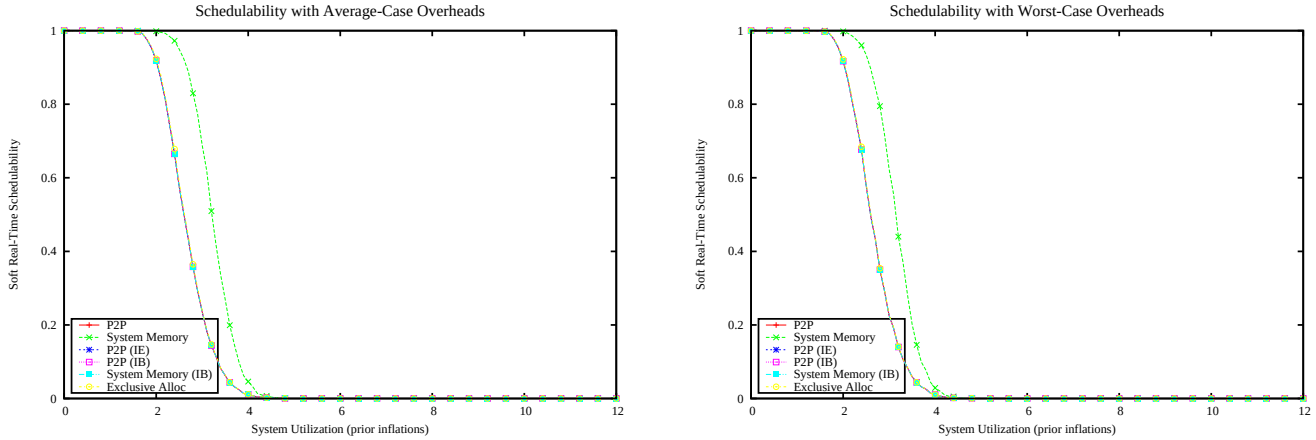

Figure 526: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

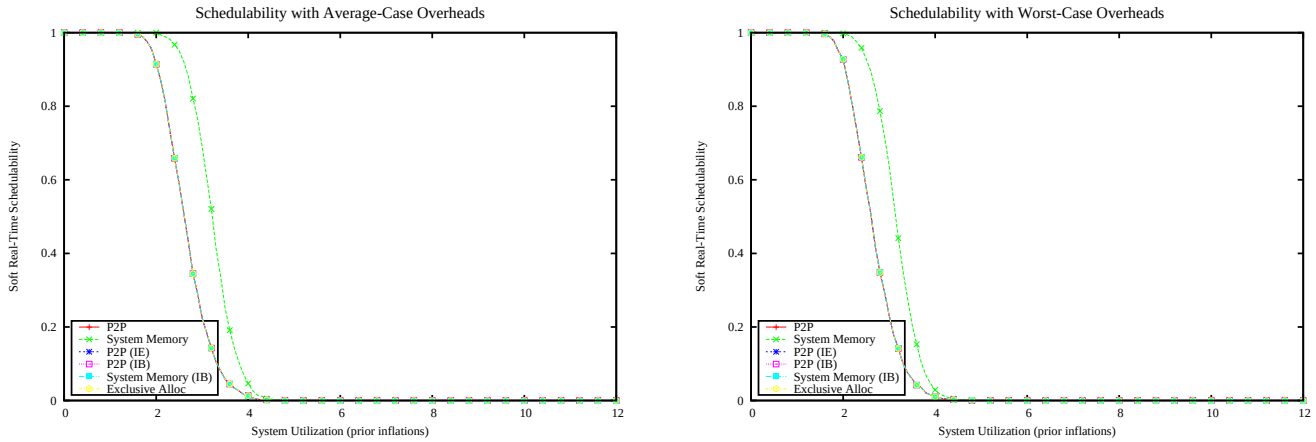

Figure 527: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

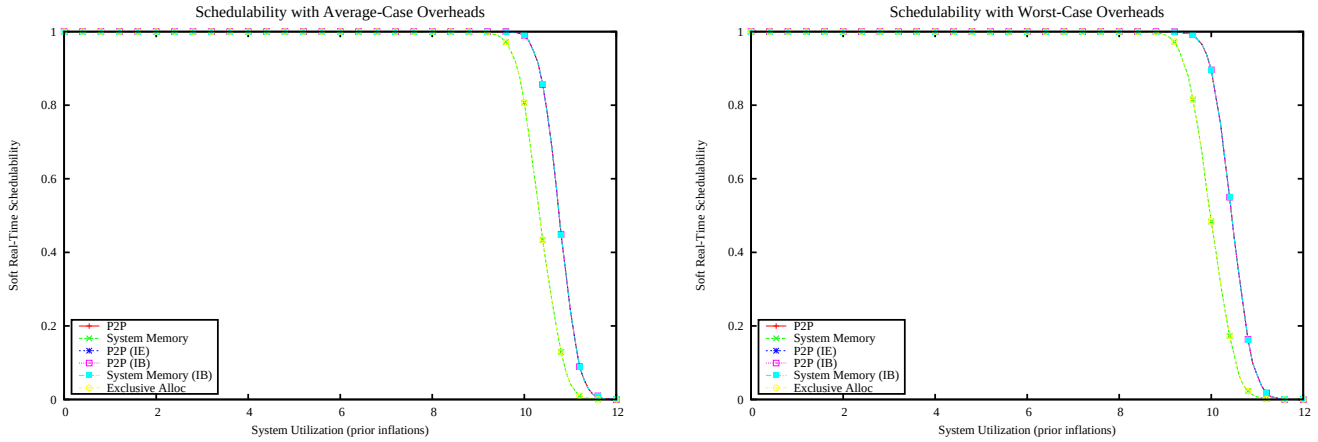

Figure 528: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

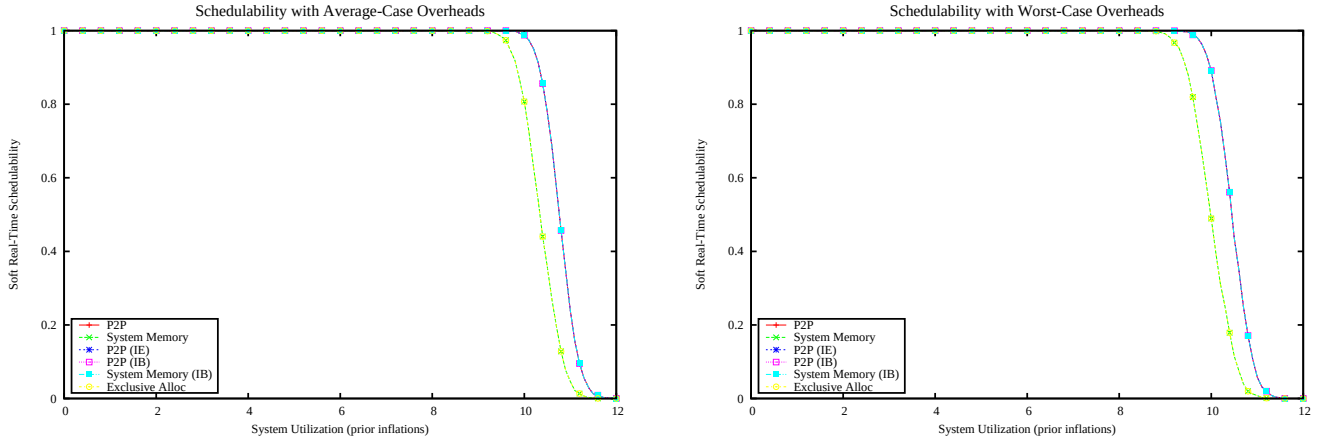

Figure 529: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

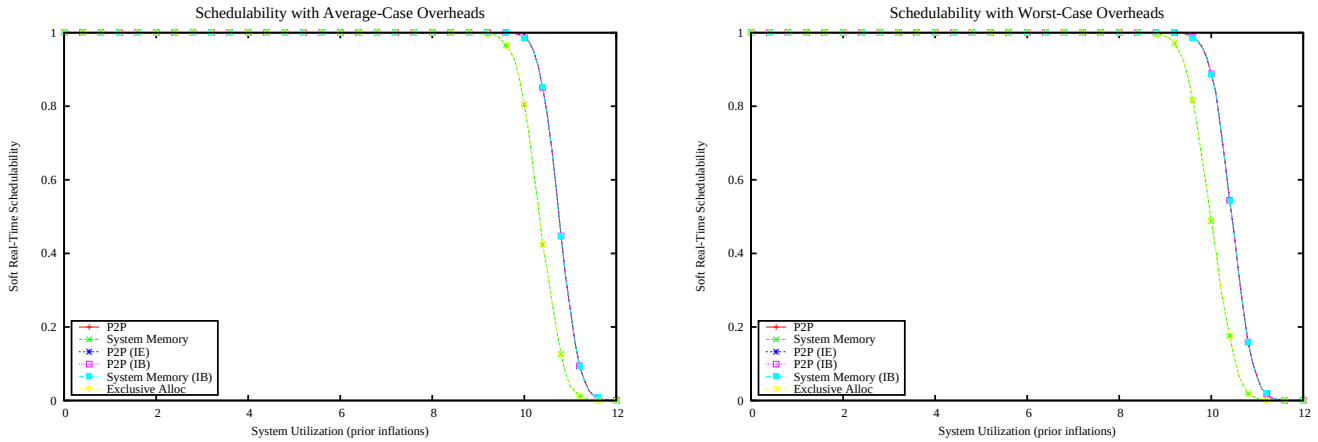

Figure 530: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

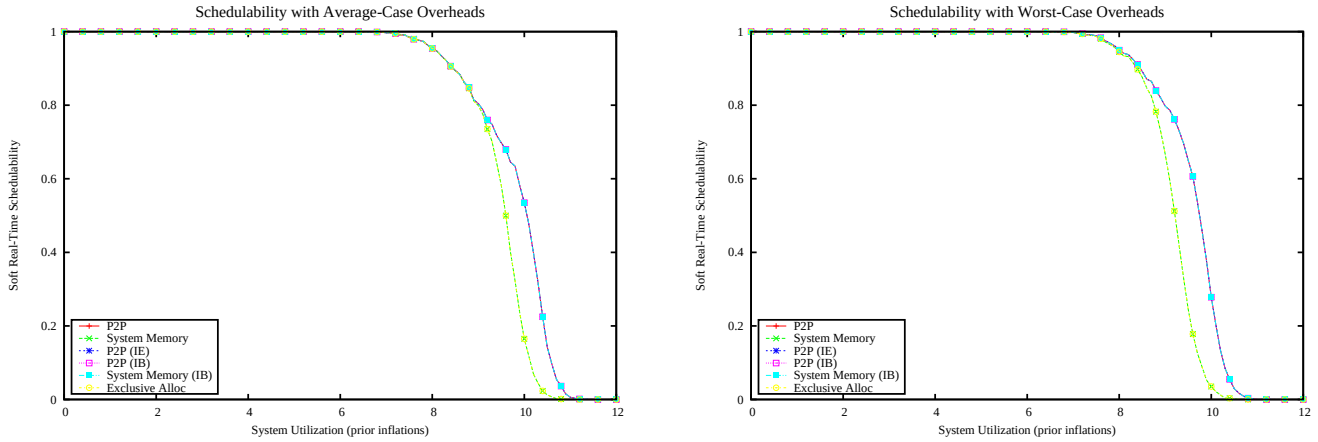

Figure 531: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

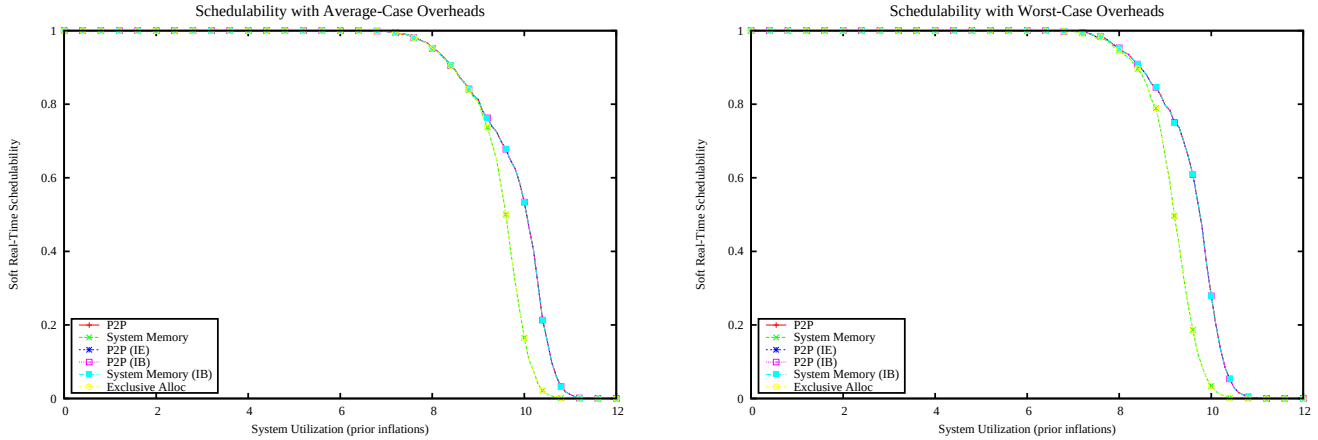

Figure 532: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

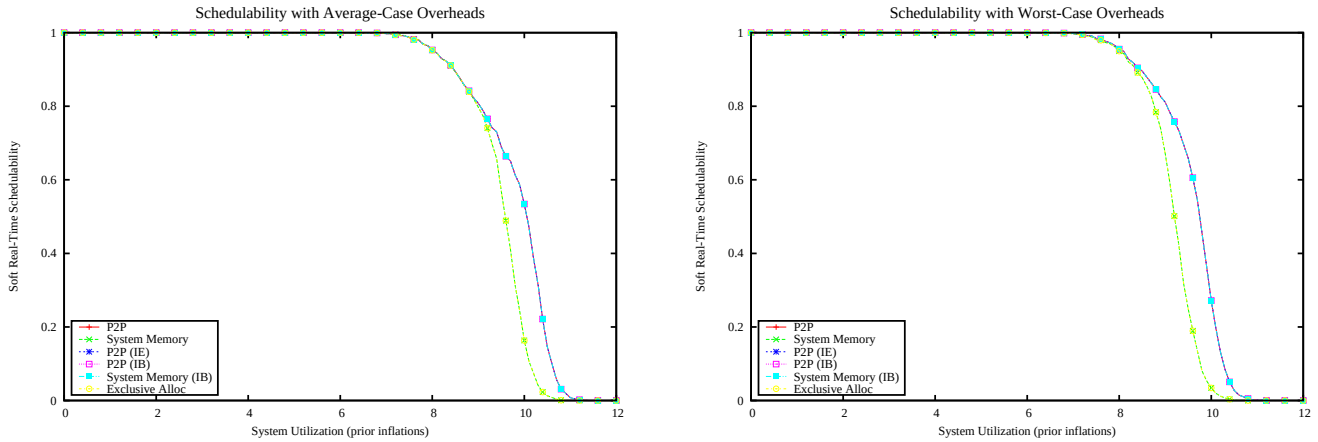

Figure 533: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

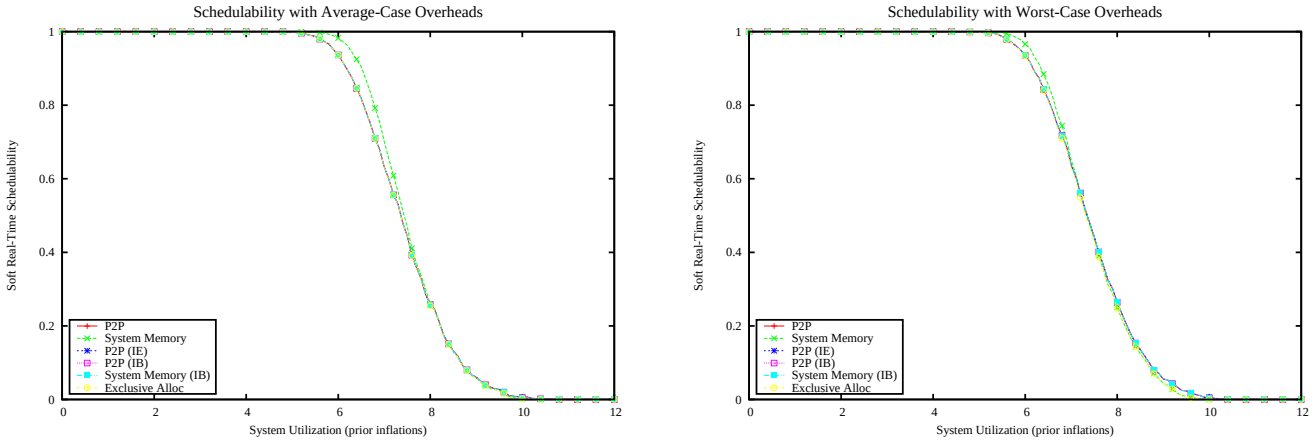

Figure 534: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

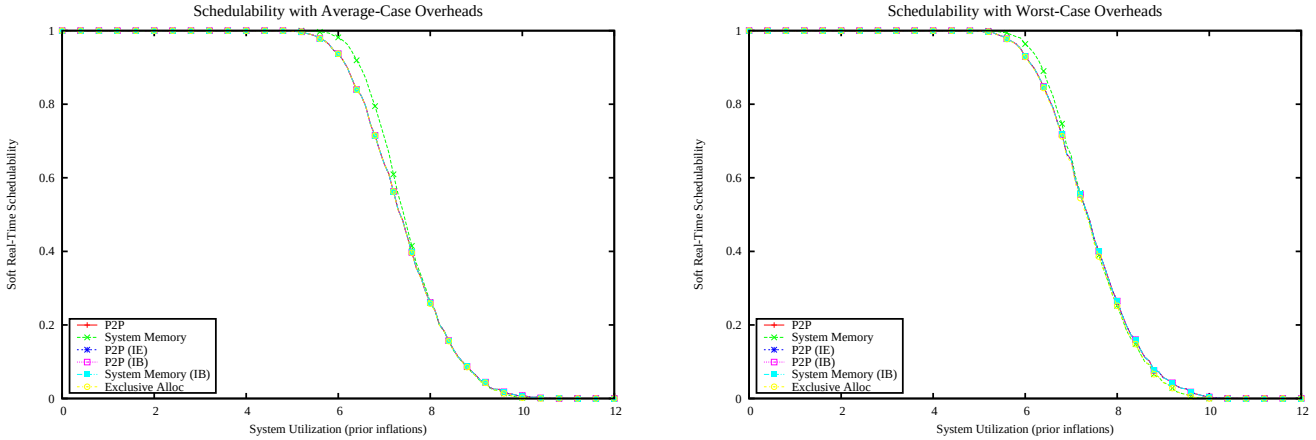

Figure 535: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

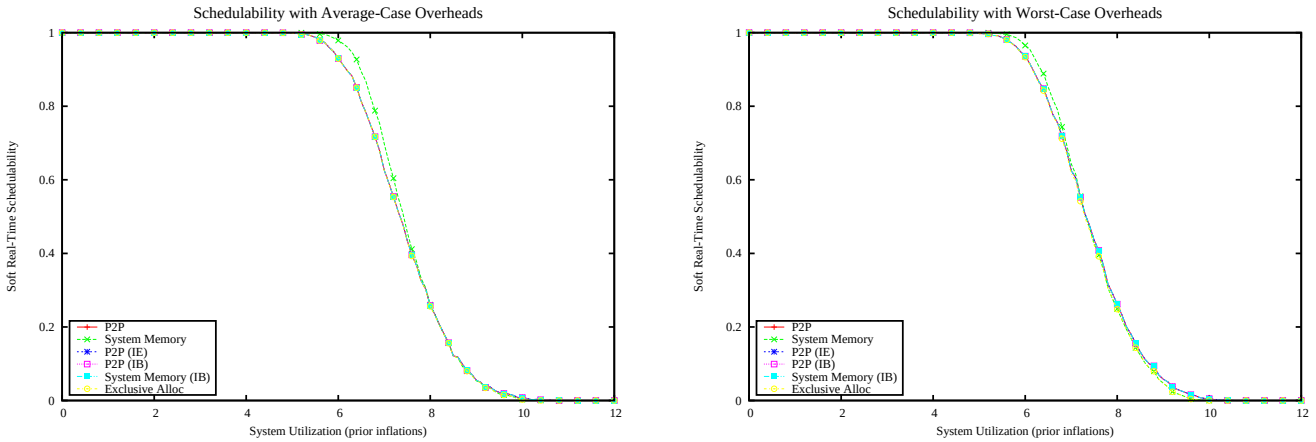

Figure 536: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

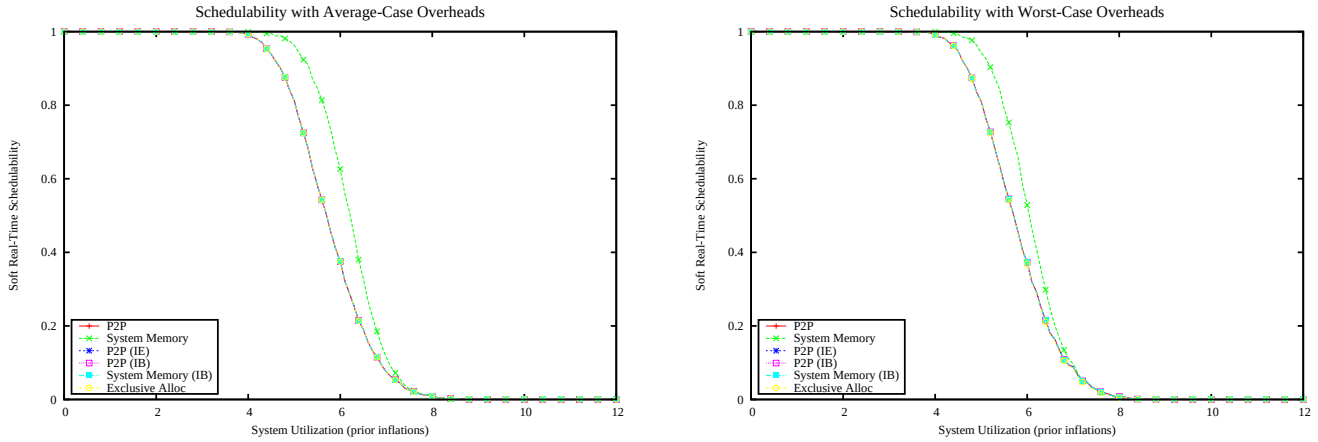

Figure 537: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

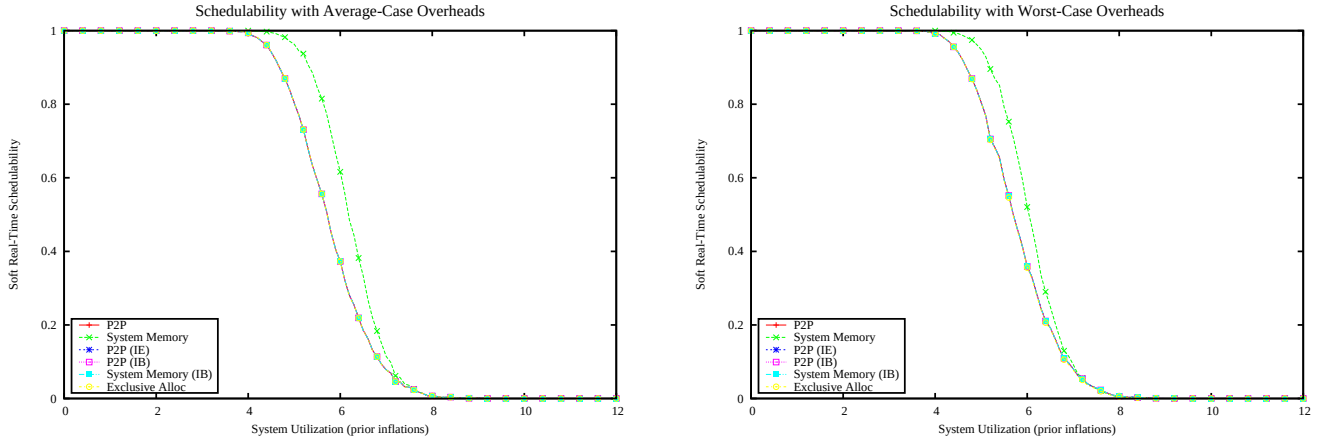

Figure 538: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

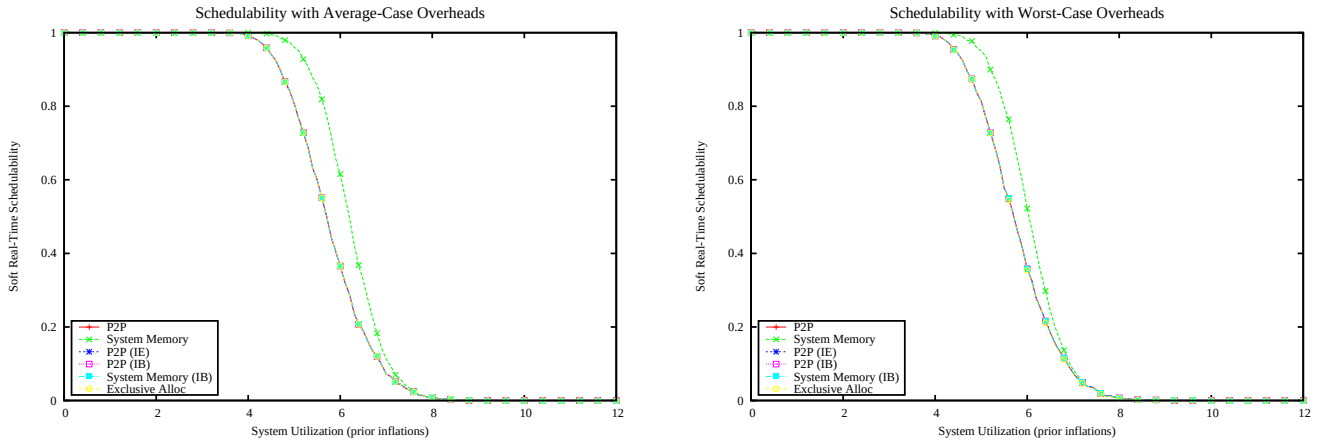

Figure 539: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

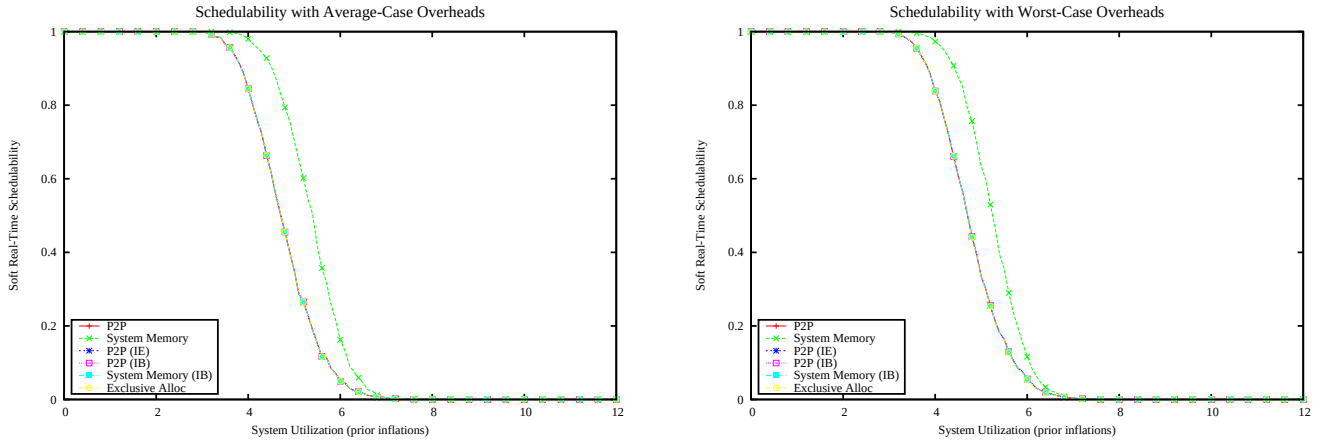

Figure 540: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

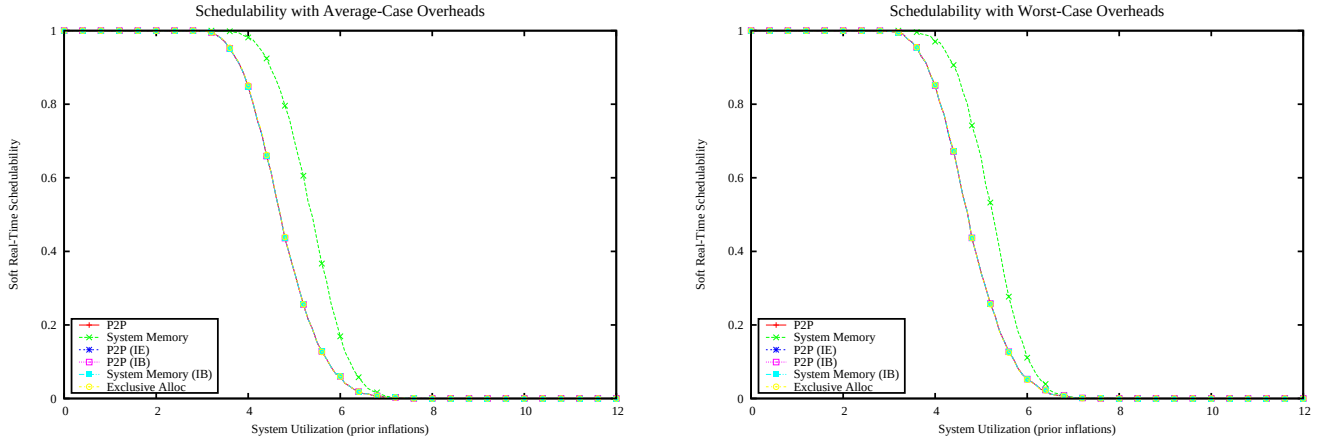

Figure 541: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

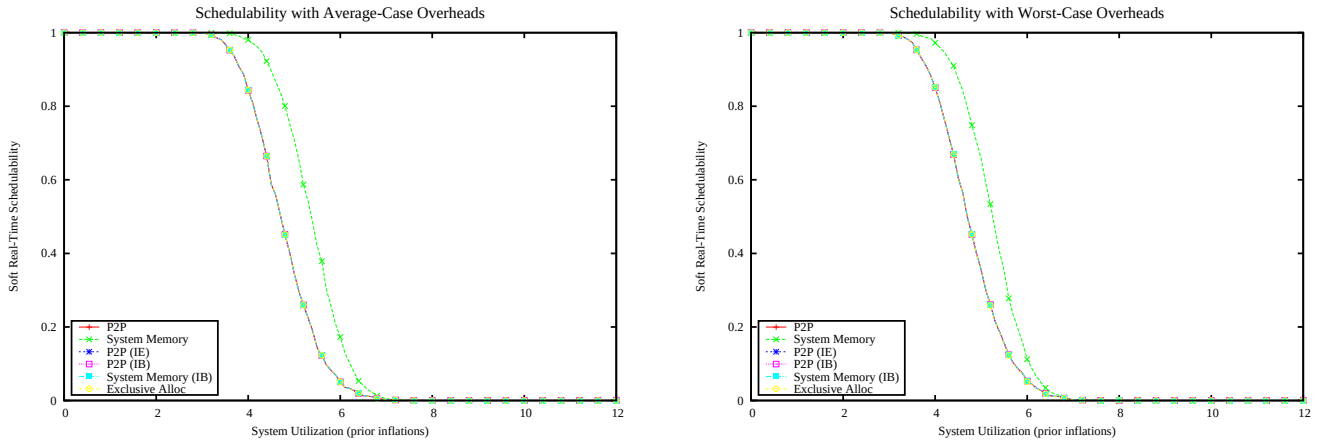

Figure 542: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

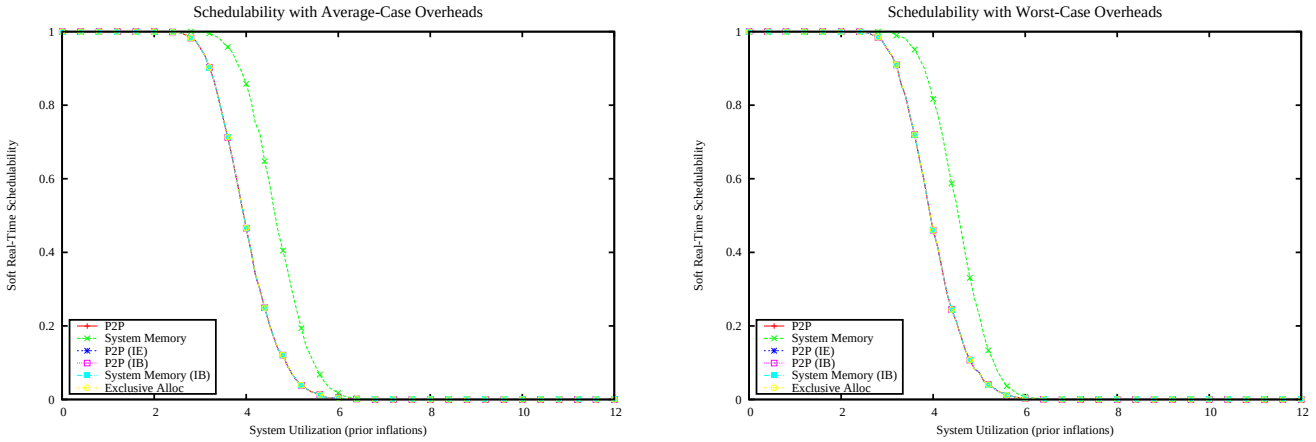

Figure 543: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

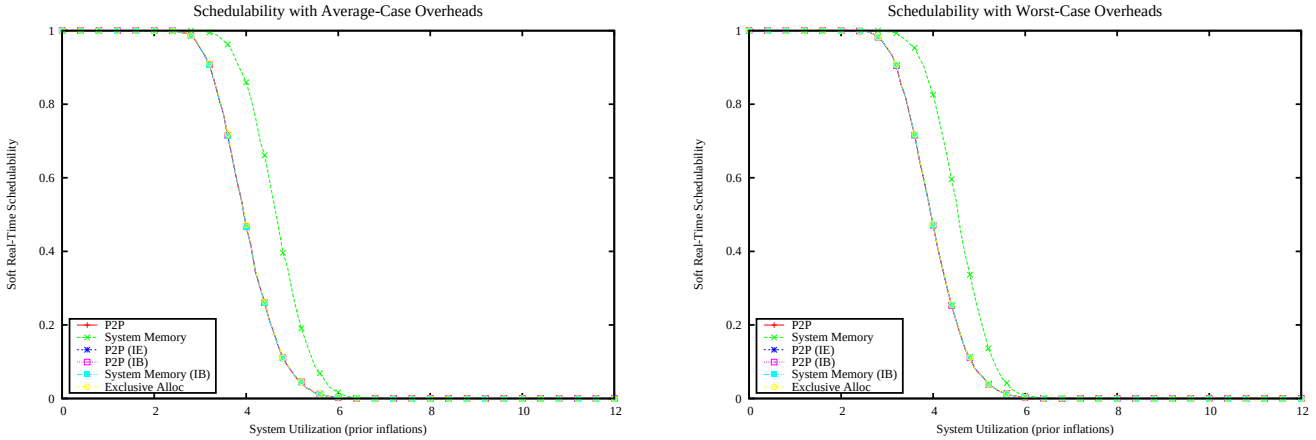

Figure 544: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

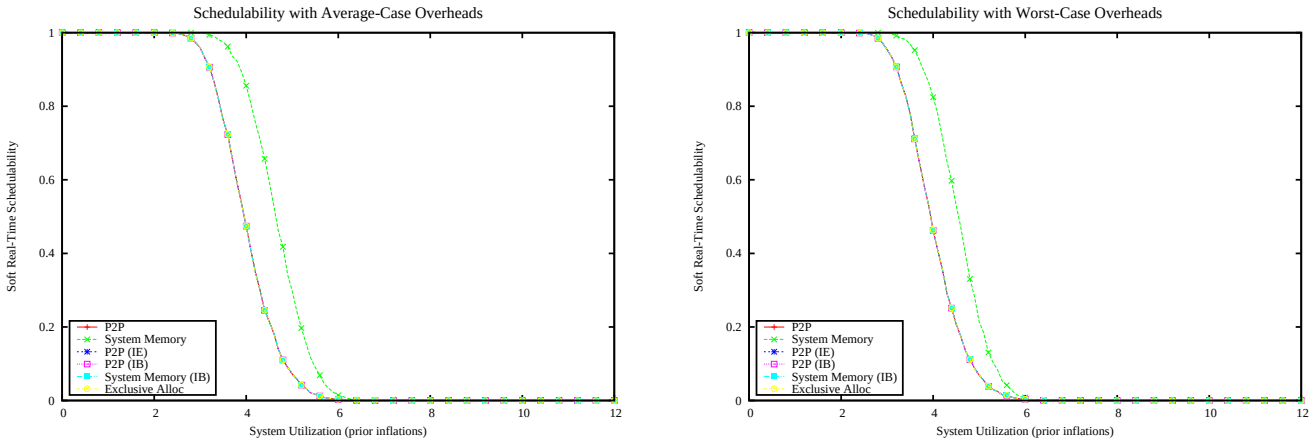

Figure 545: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

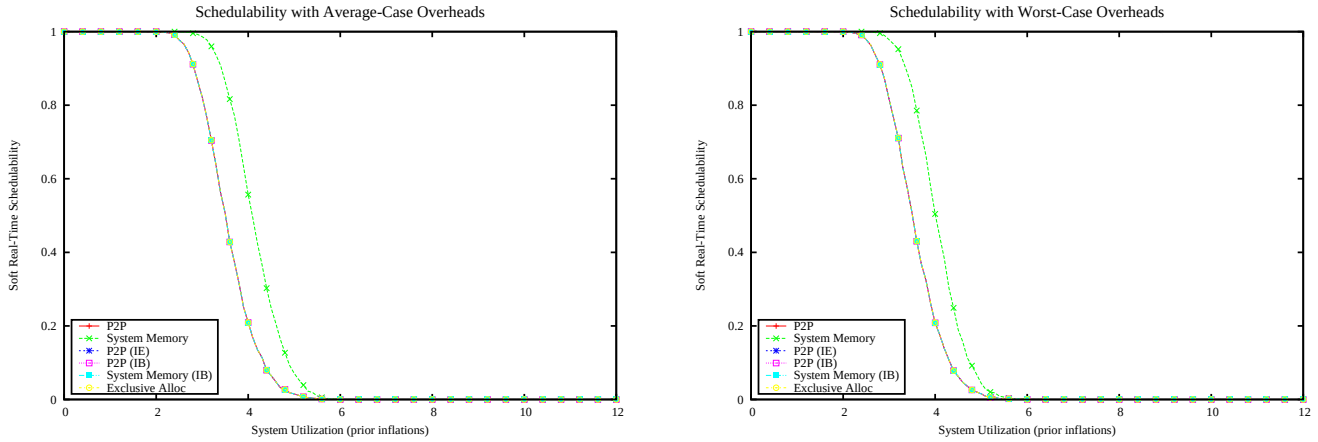

Figure 546: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

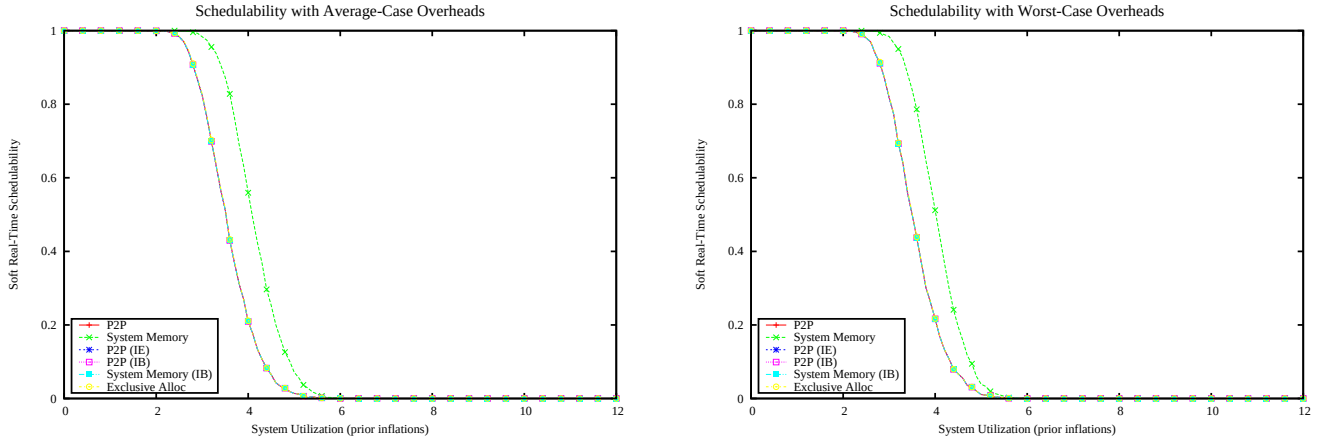

Figure 547: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

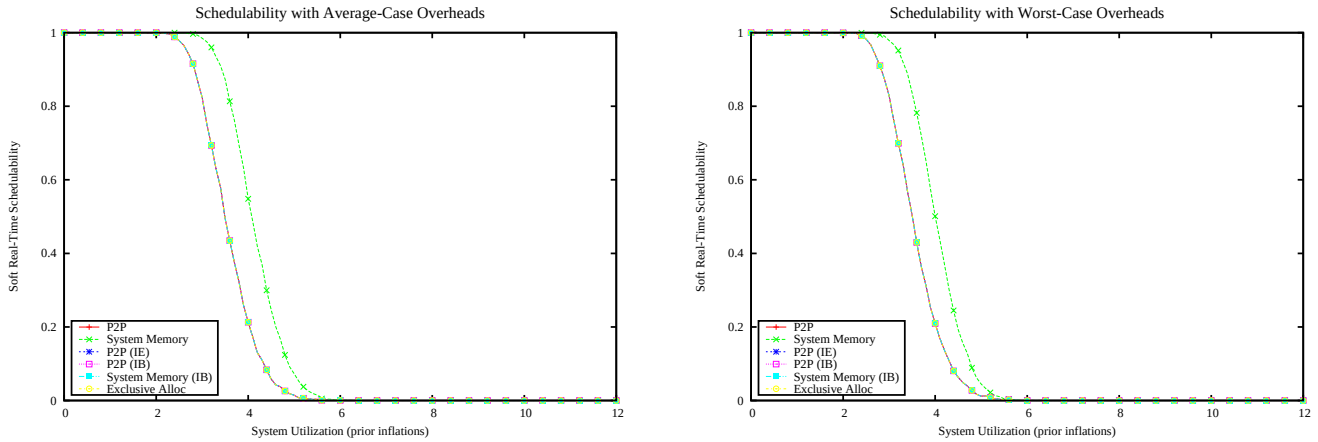

Figure 548: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

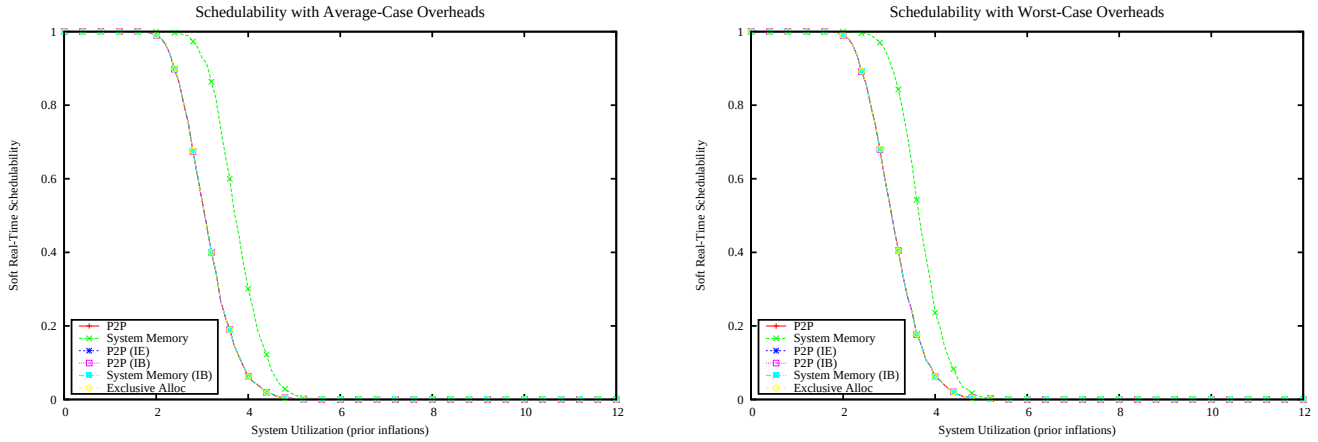

Figure 549: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

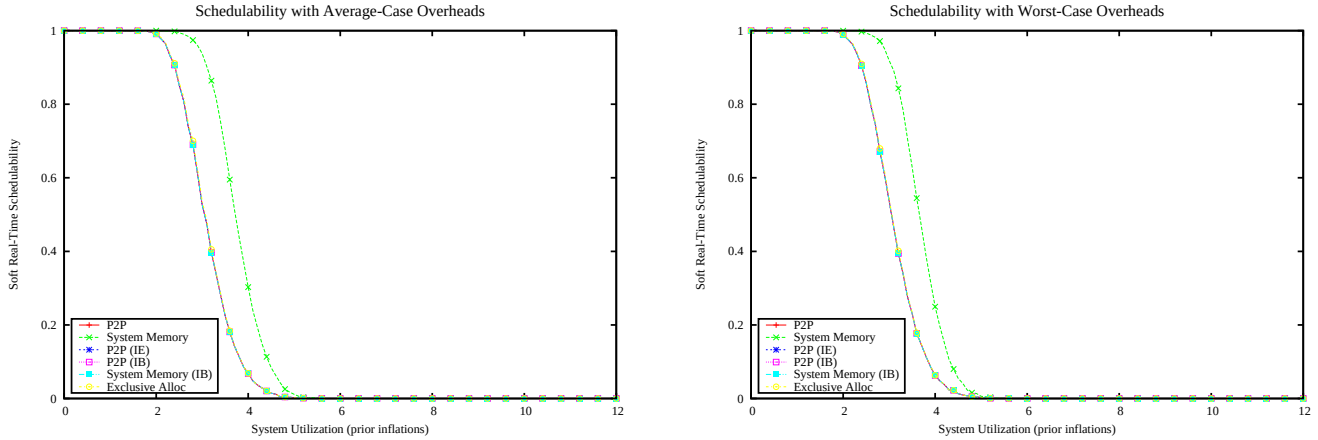

Figure 550: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

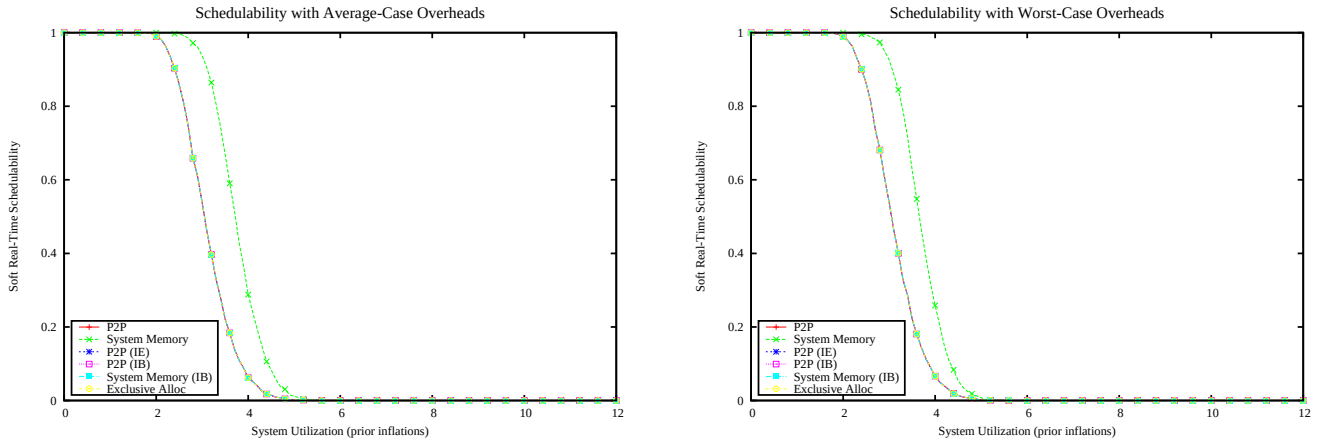

Figure 551: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

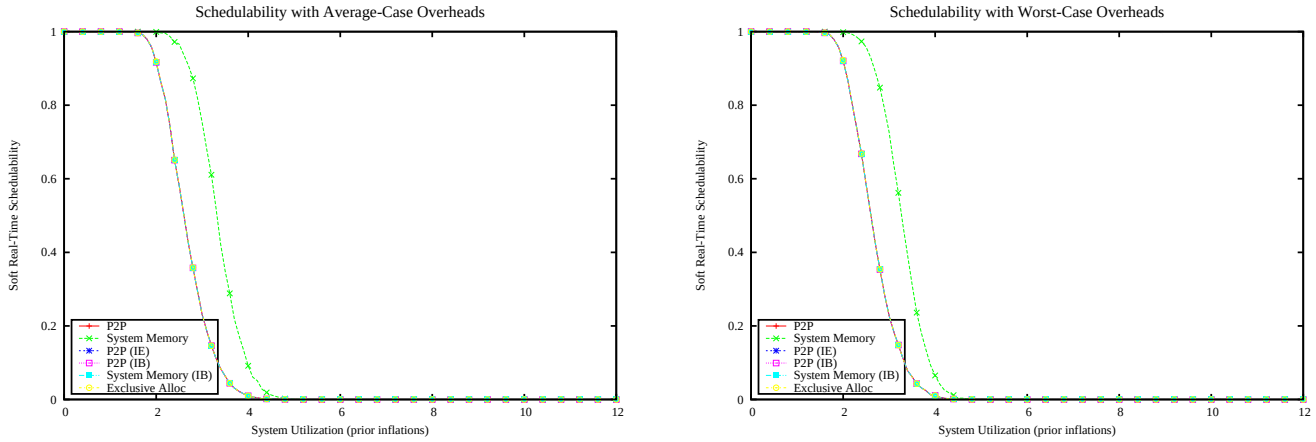

Figure 552: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

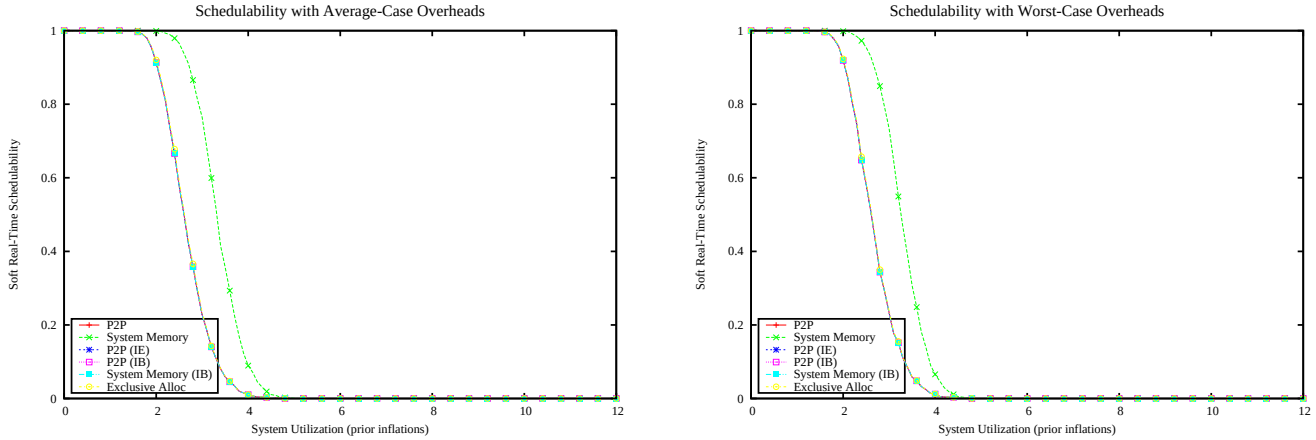

Figure 553: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

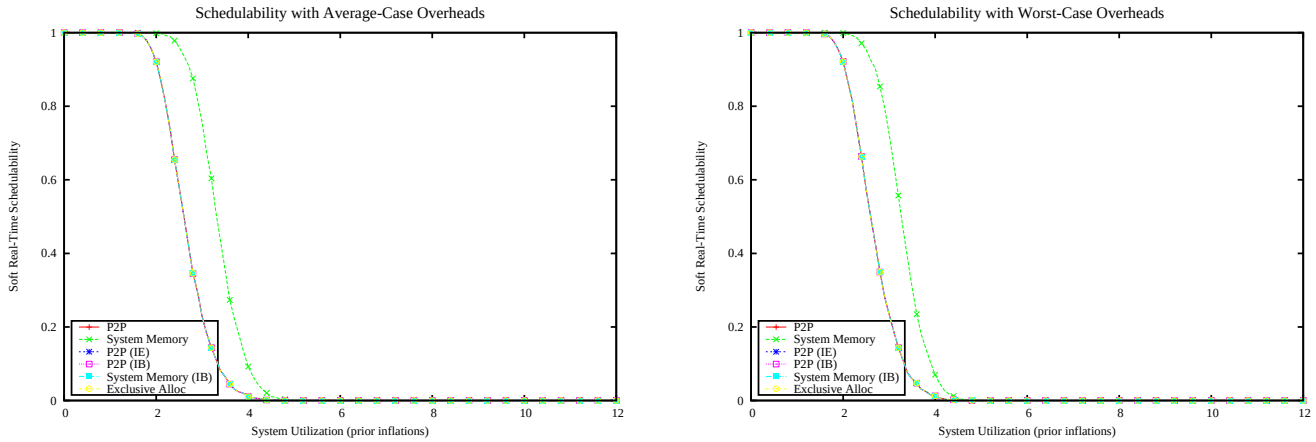

Figure 554: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

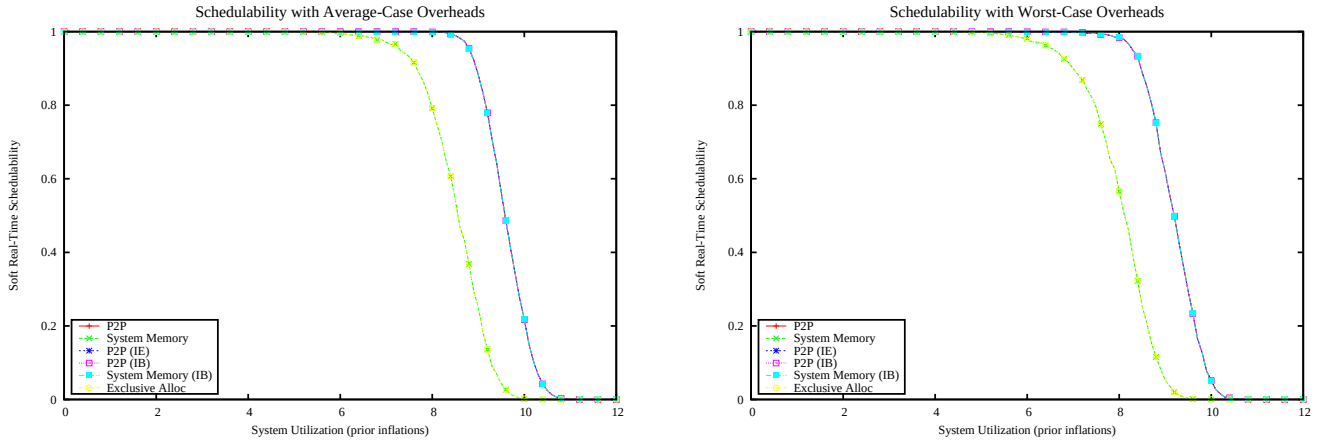

Figure 555: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

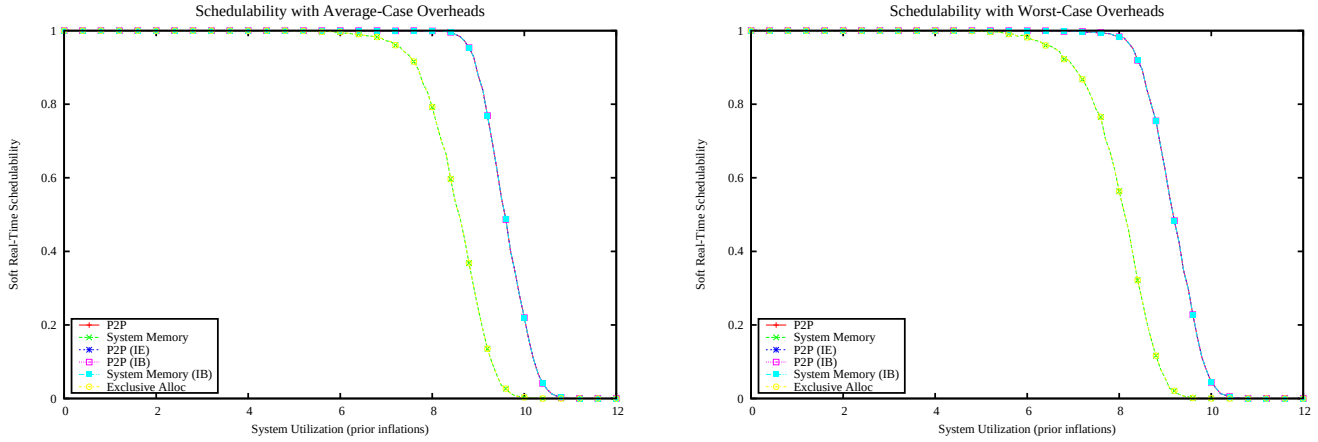

Figure 556: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

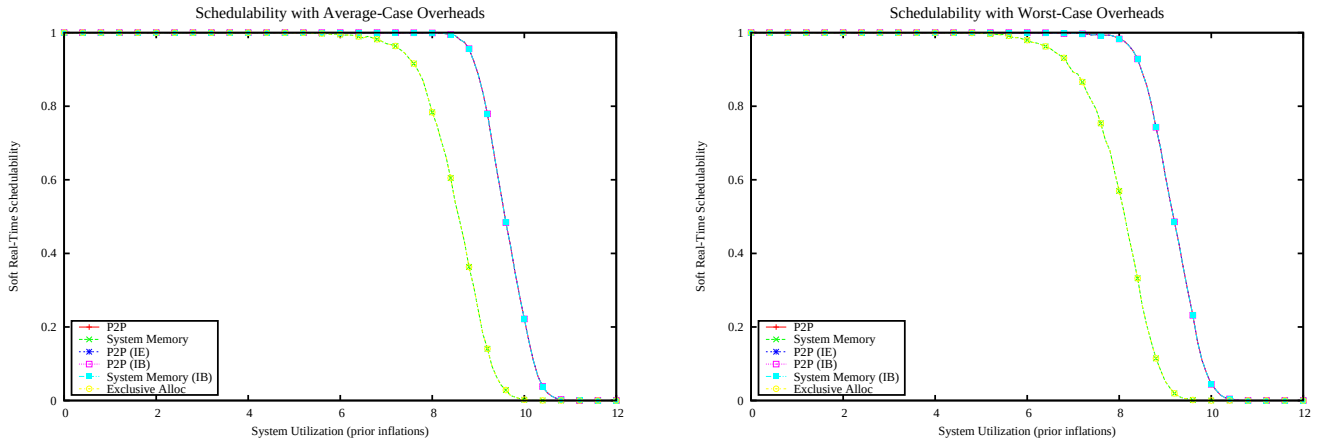

Figure 557: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

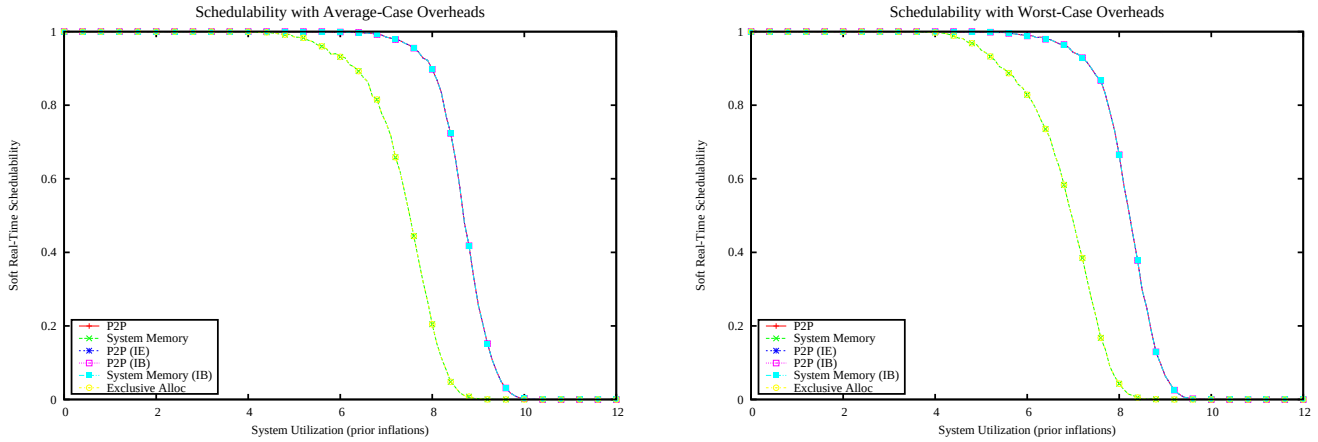

Figure 558: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

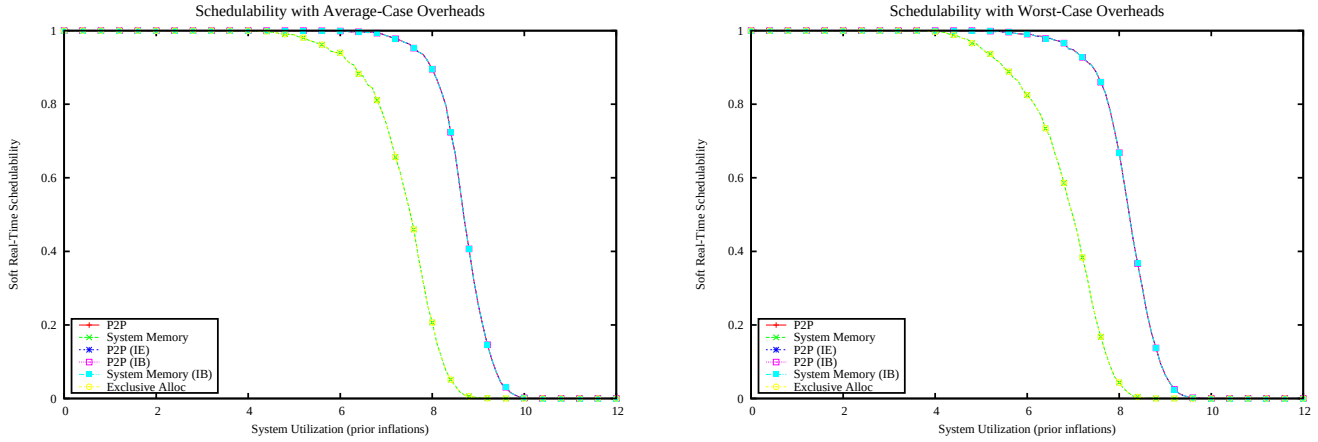

Figure 559: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

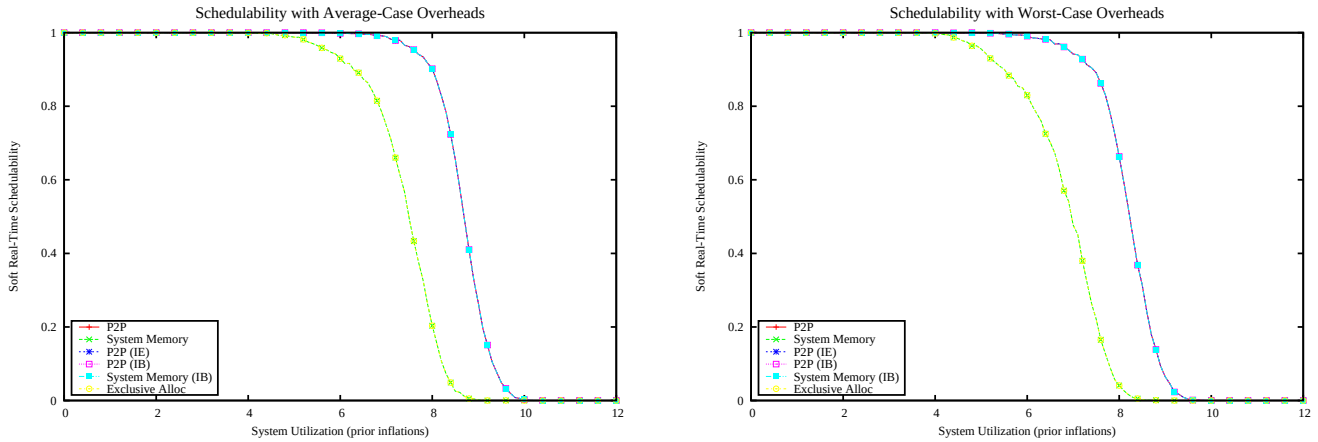

Figure 560: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

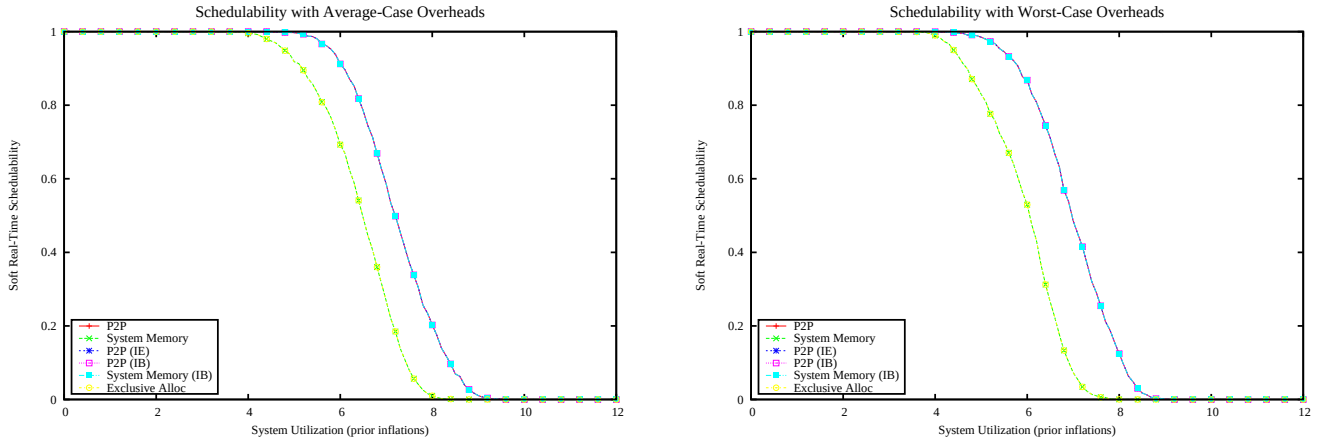

Figure 561: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

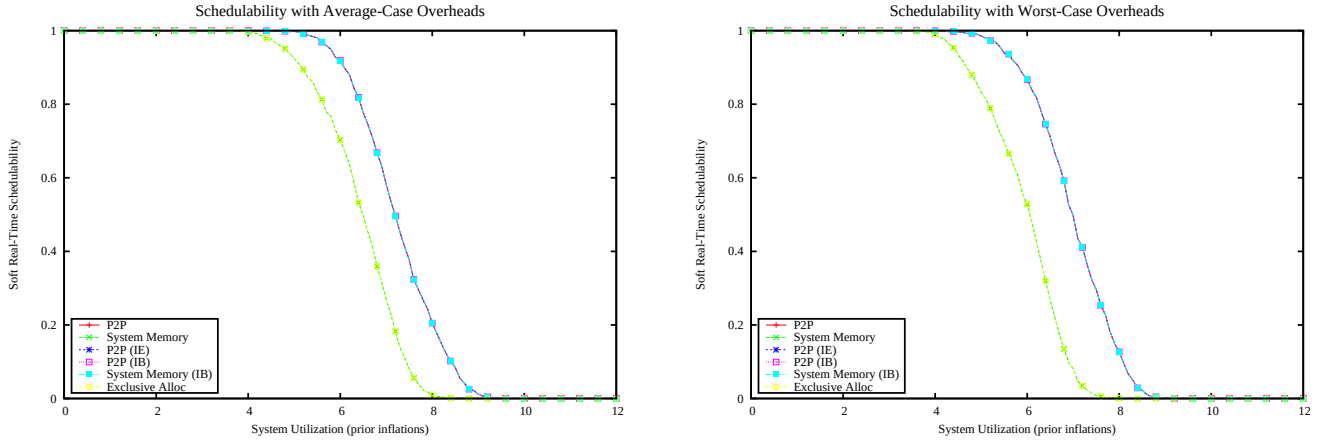

Figure 562: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

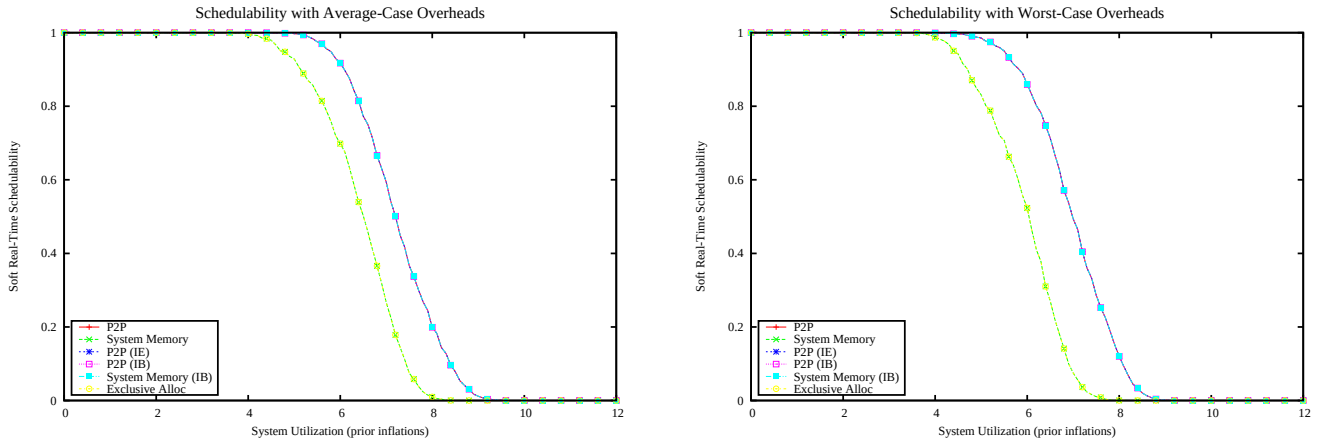

Figure 563: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

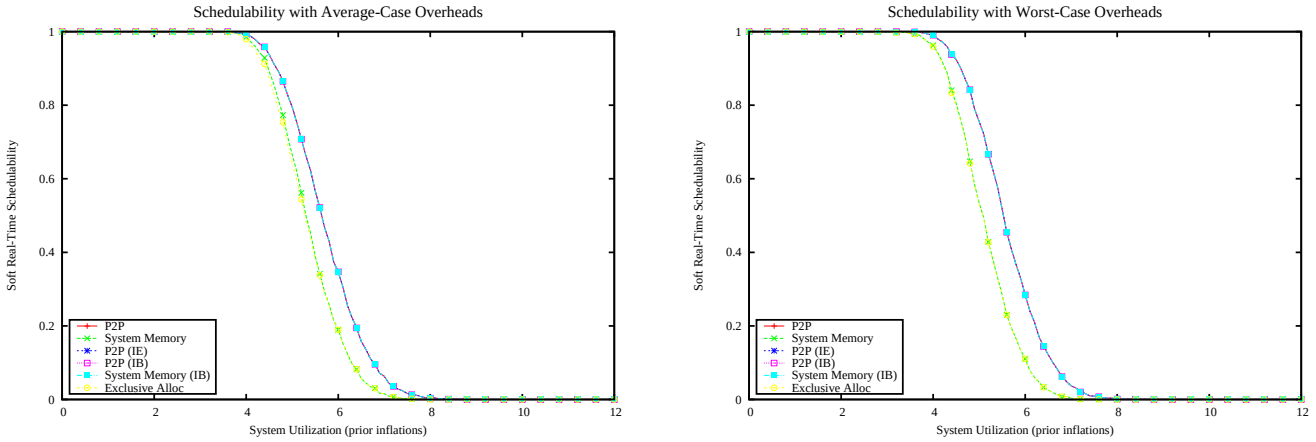

Figure 564: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

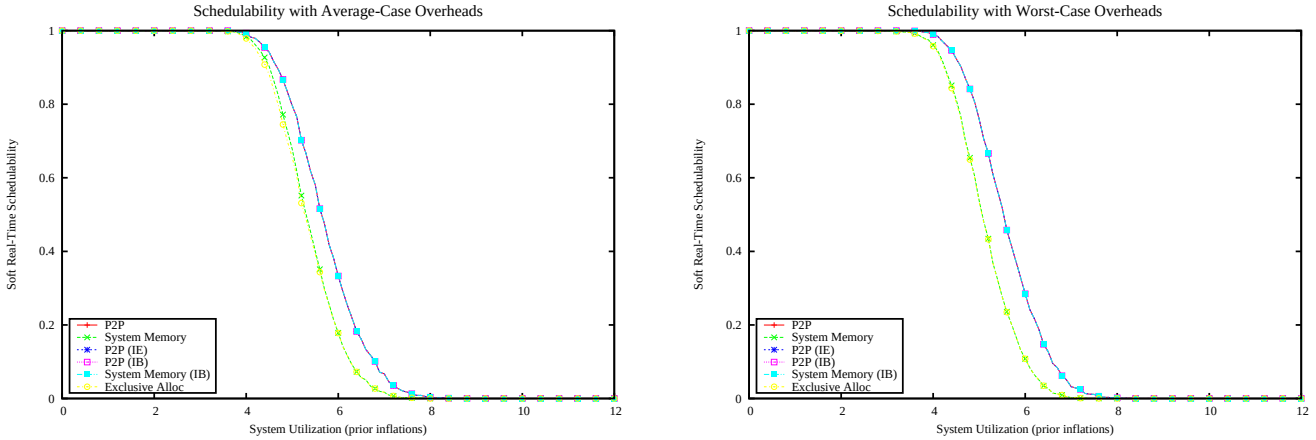

Figure 565: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

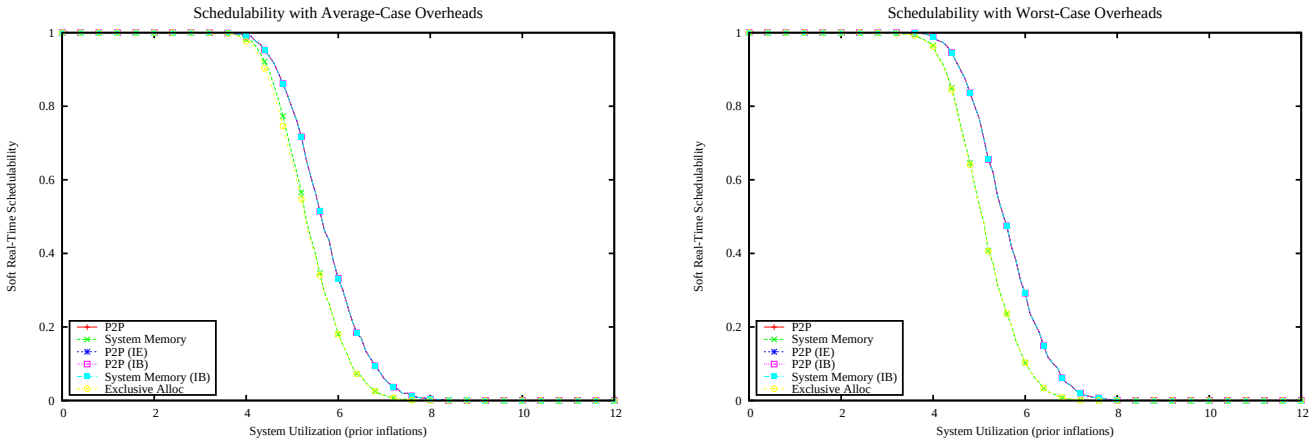

Figure 566: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

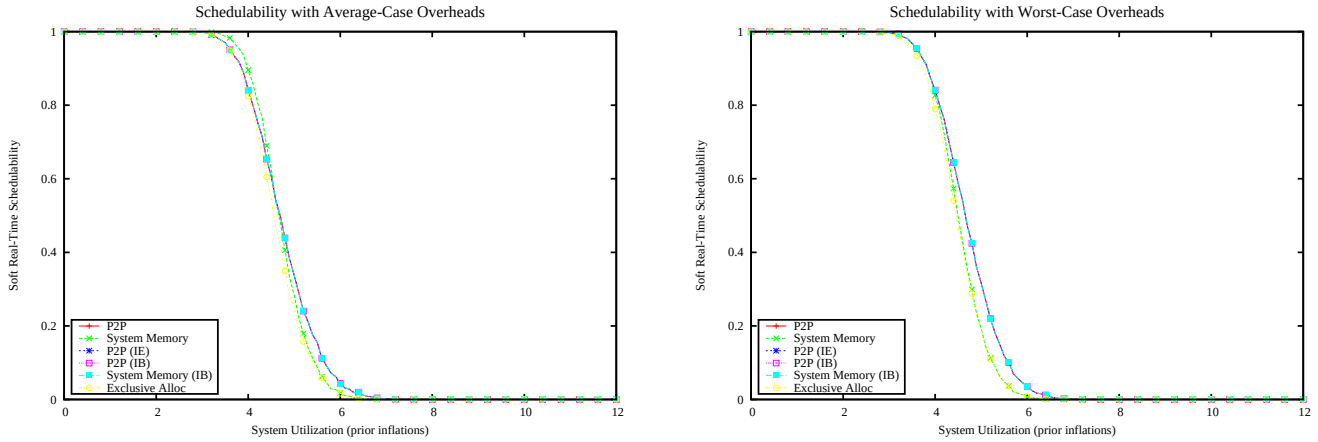

Figure 567: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

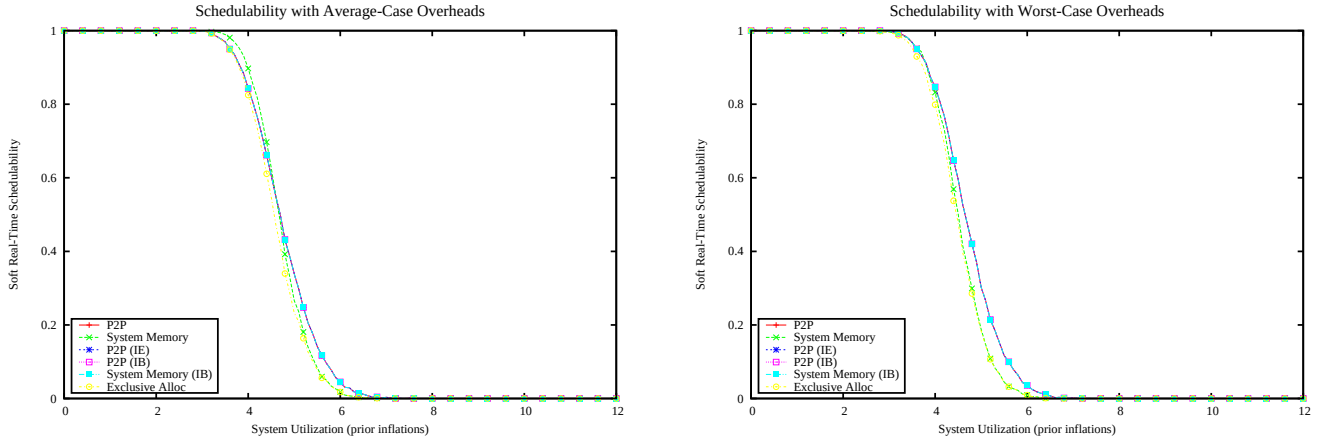

Figure 568: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

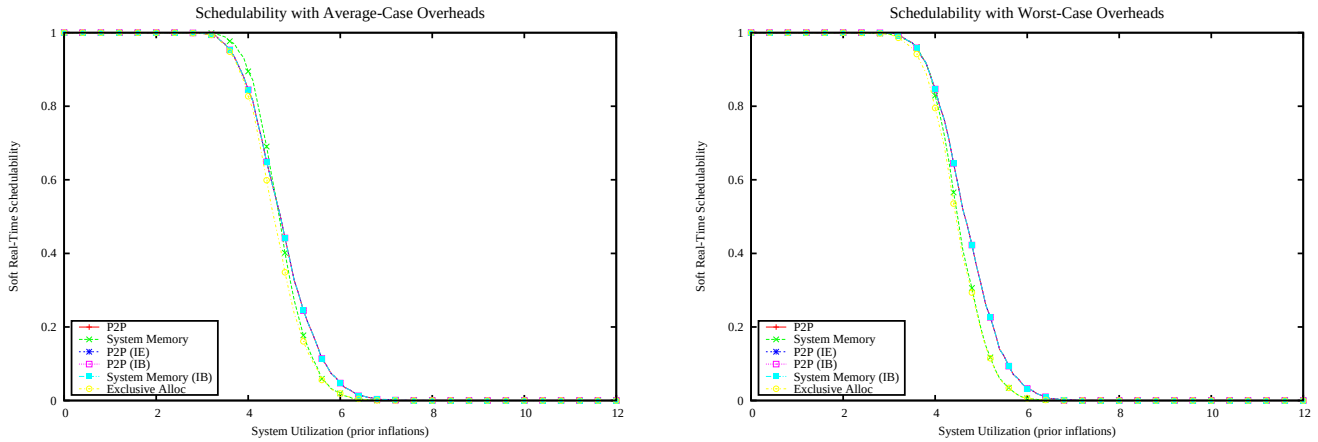

Figure 569: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

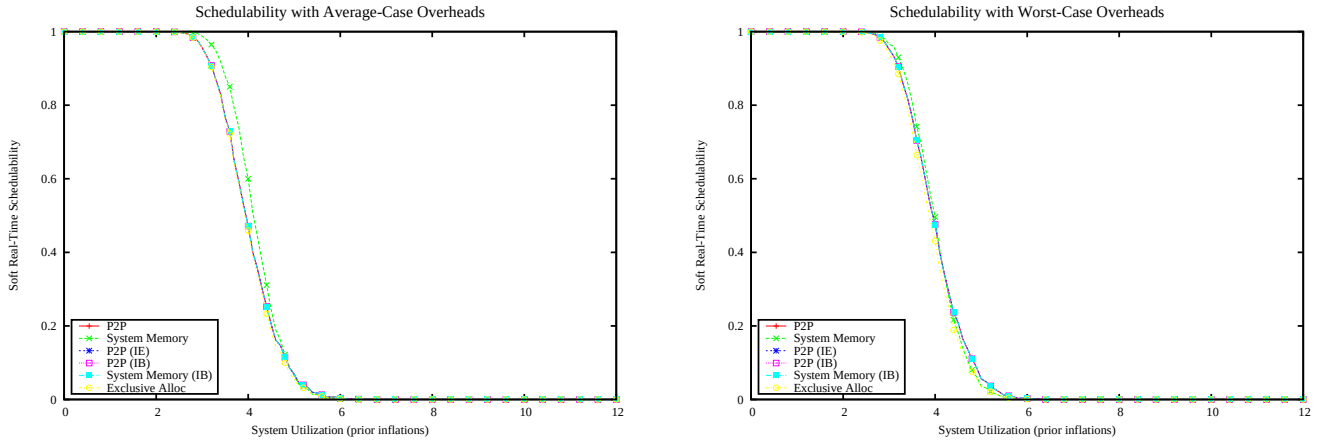

Figure 570: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

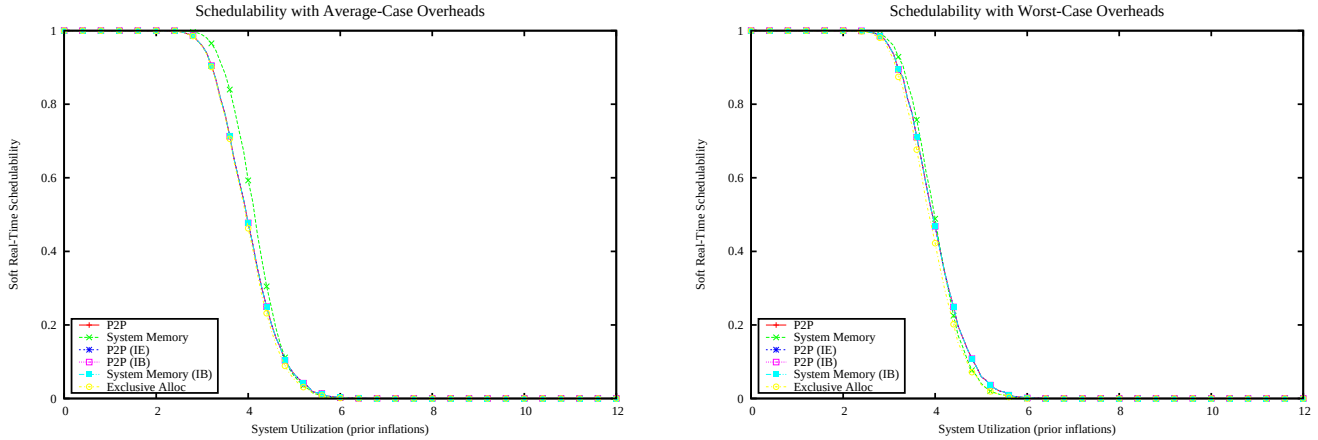

Figure 571: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

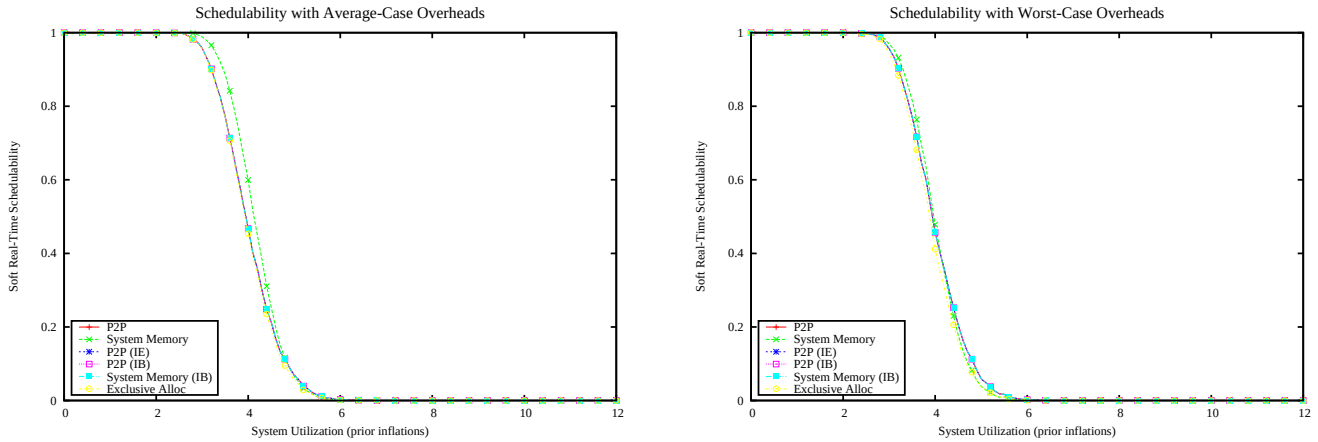

Figure 572: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

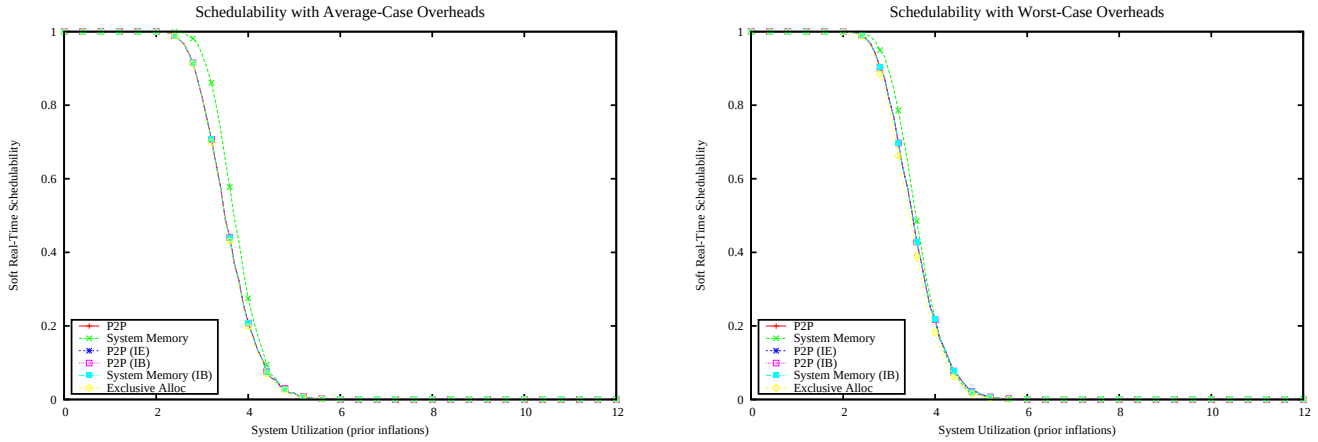

Figure 573: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

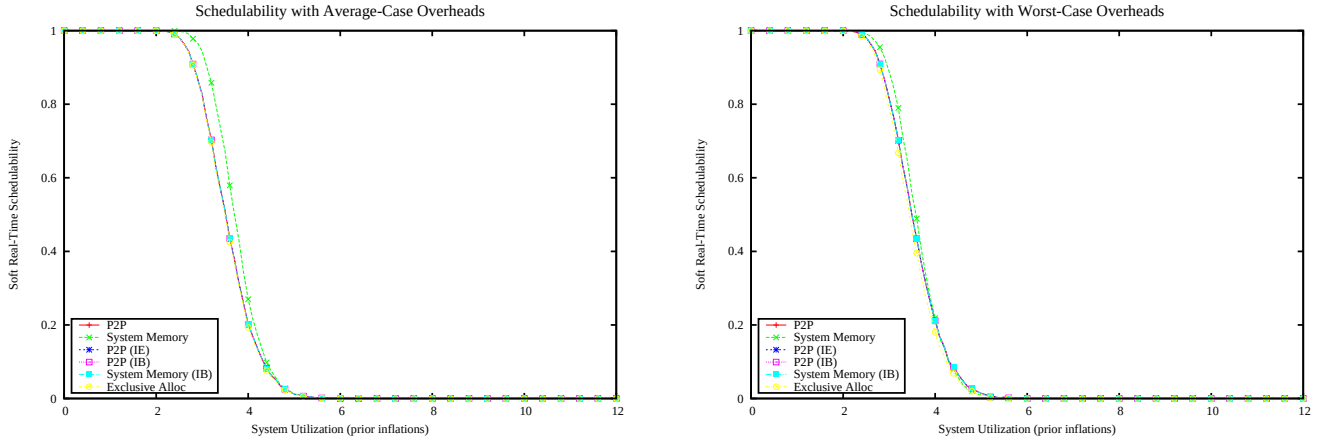

Figure 574: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

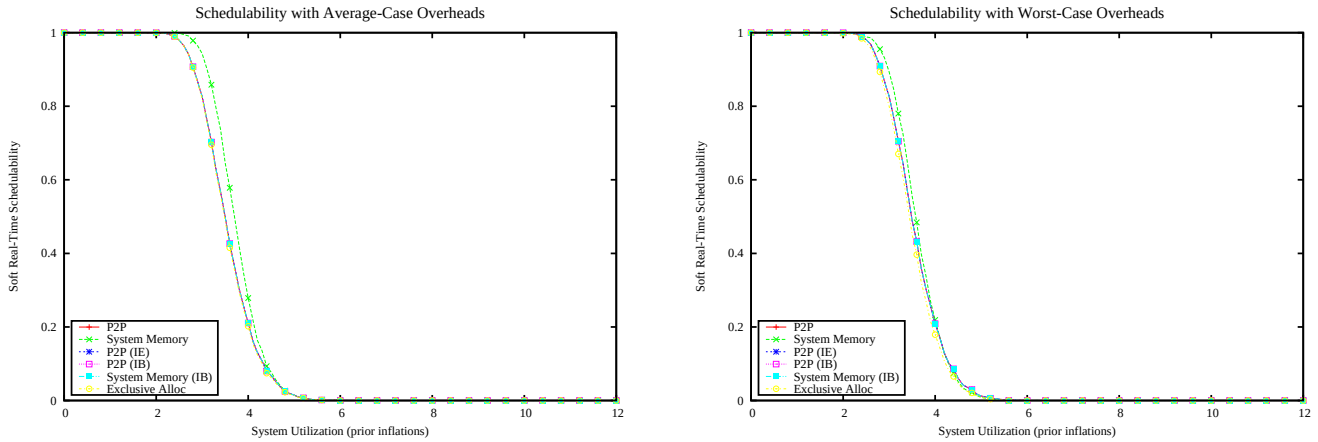

Figure 575: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

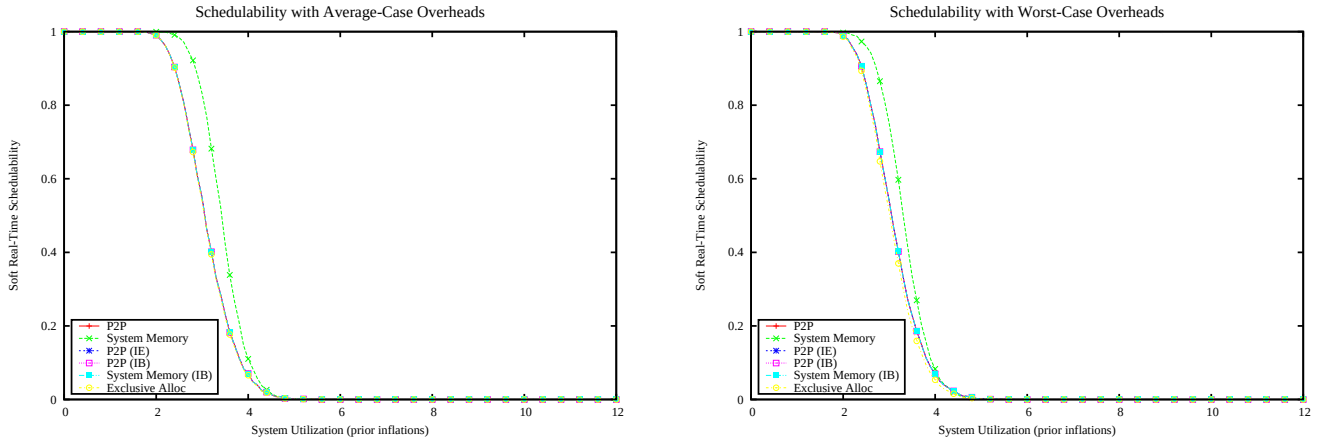

Figure 576: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

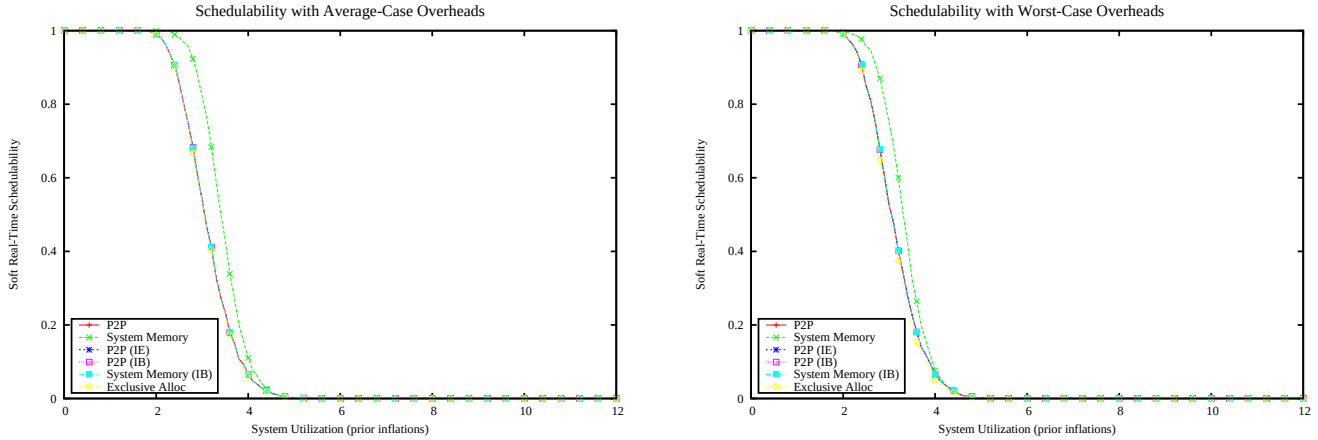

Figure 577: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

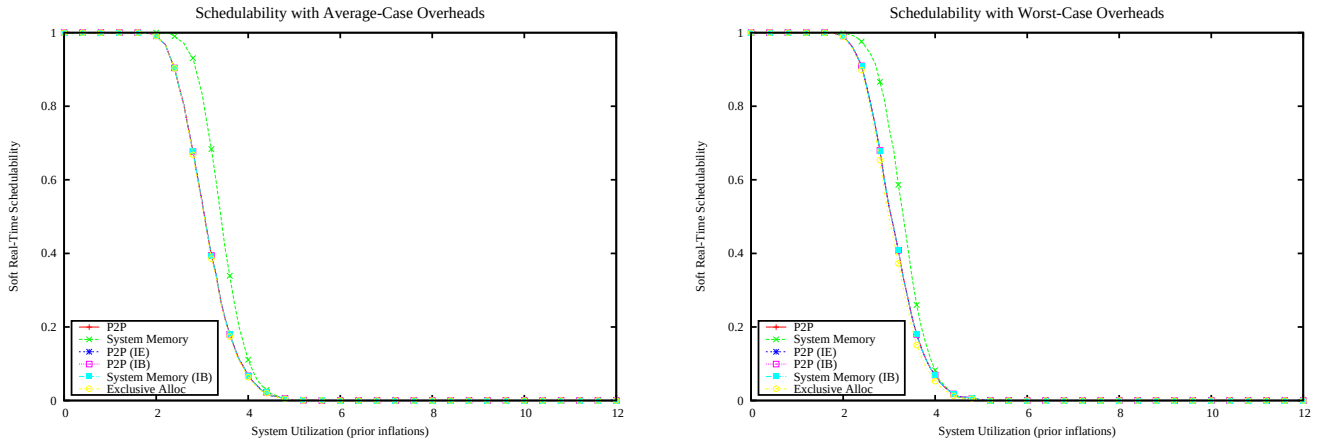

Figure 578: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

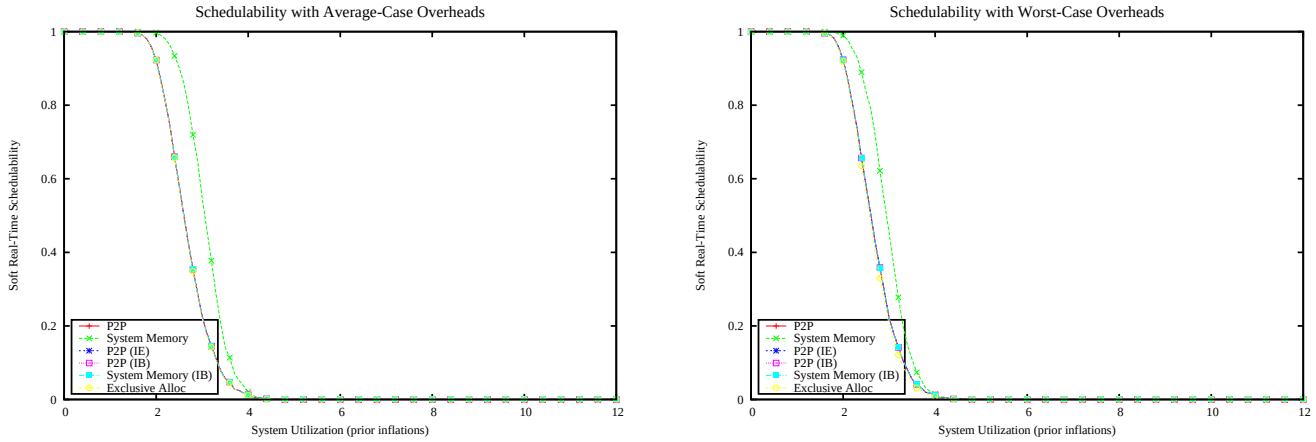

Figure 579: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

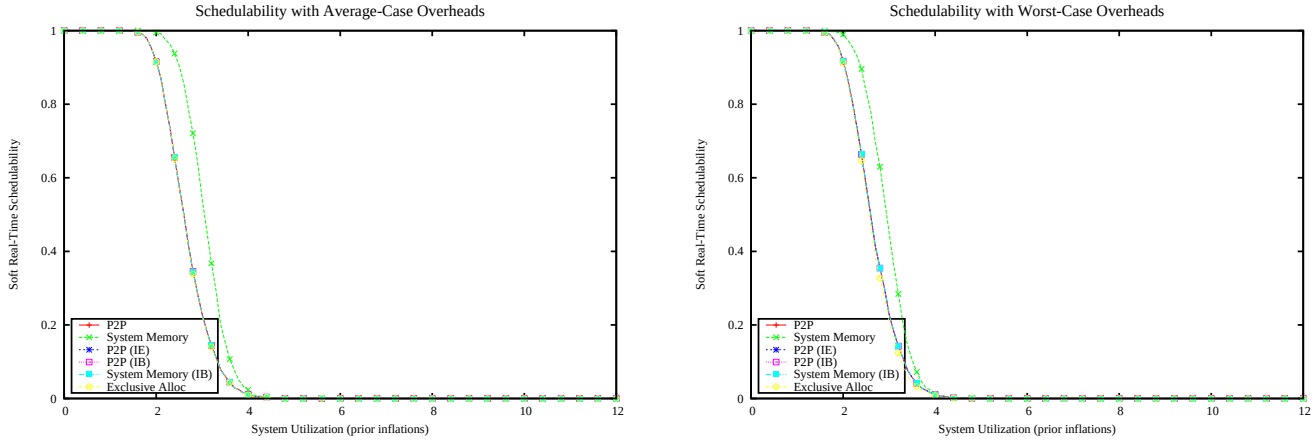

Figure 580: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

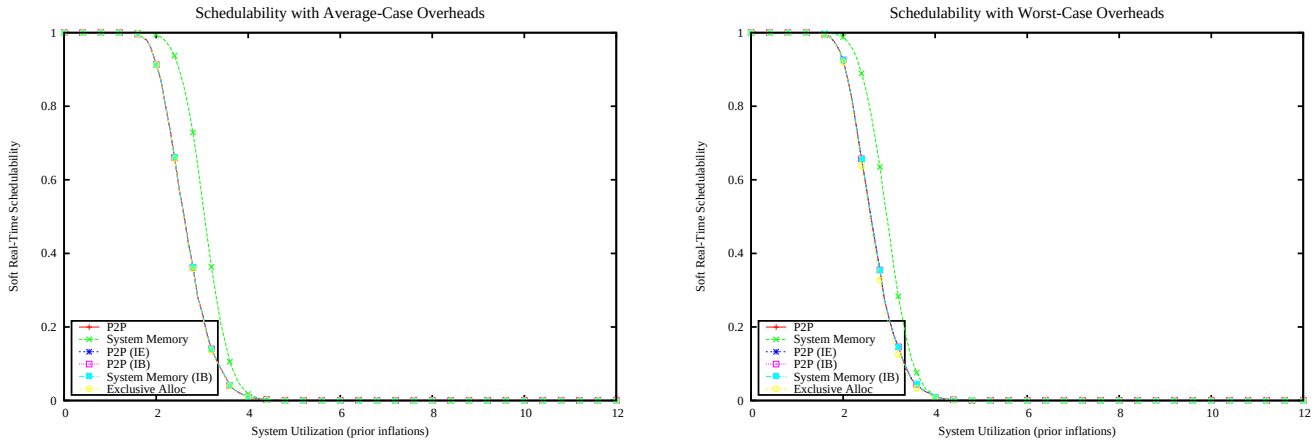

Figure 581: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

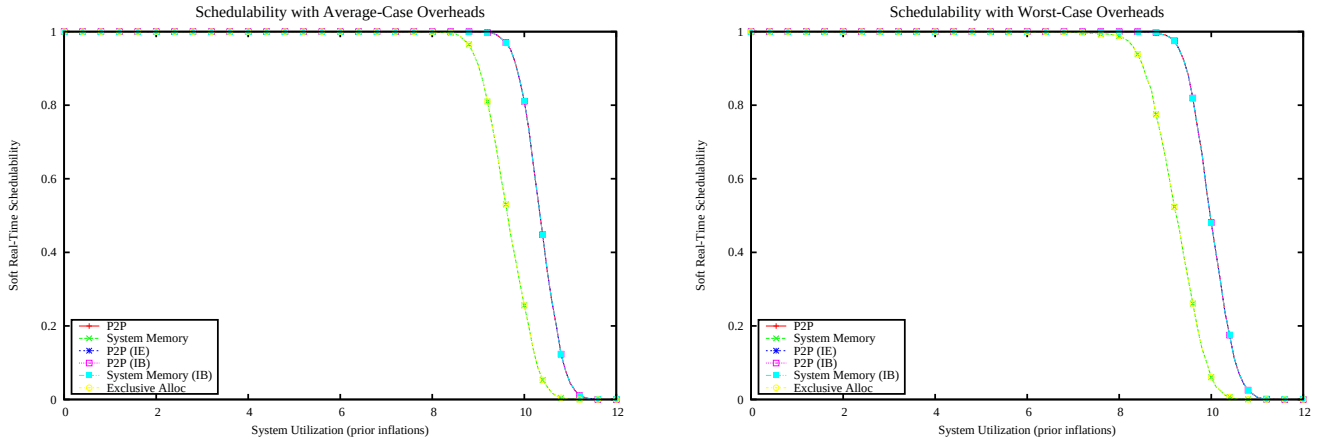

Figure 582: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

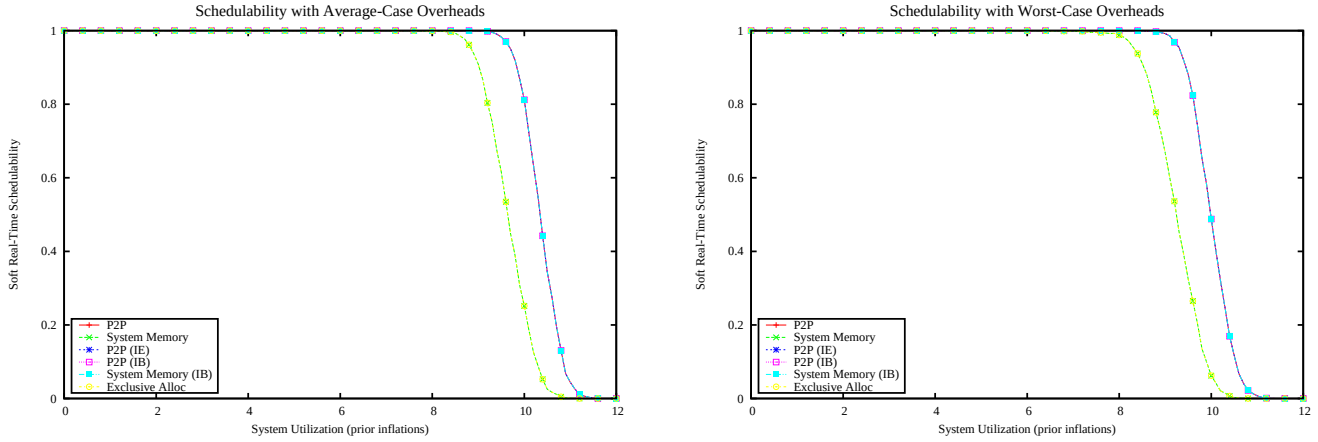

Figure 583: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

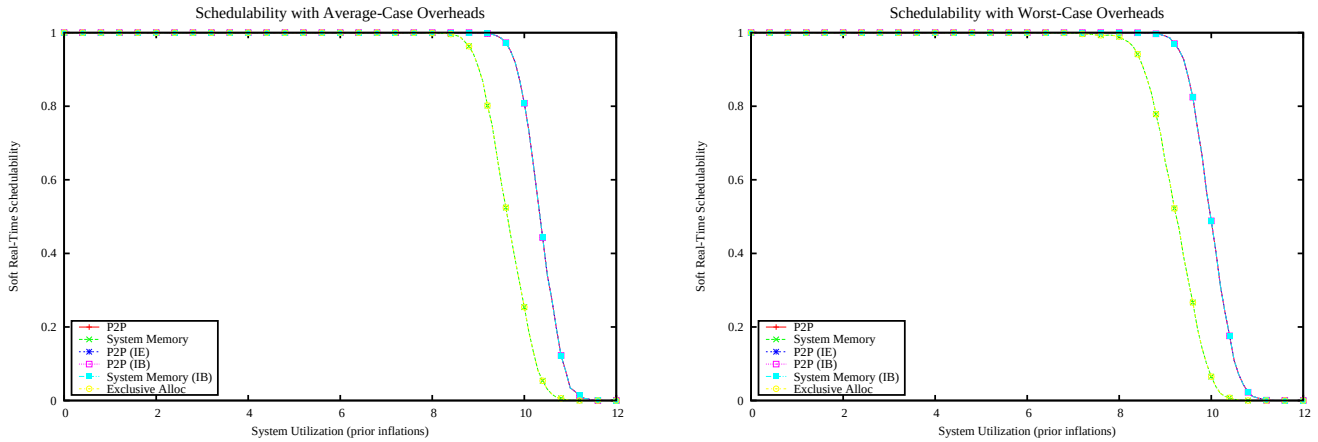

Figure 584: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

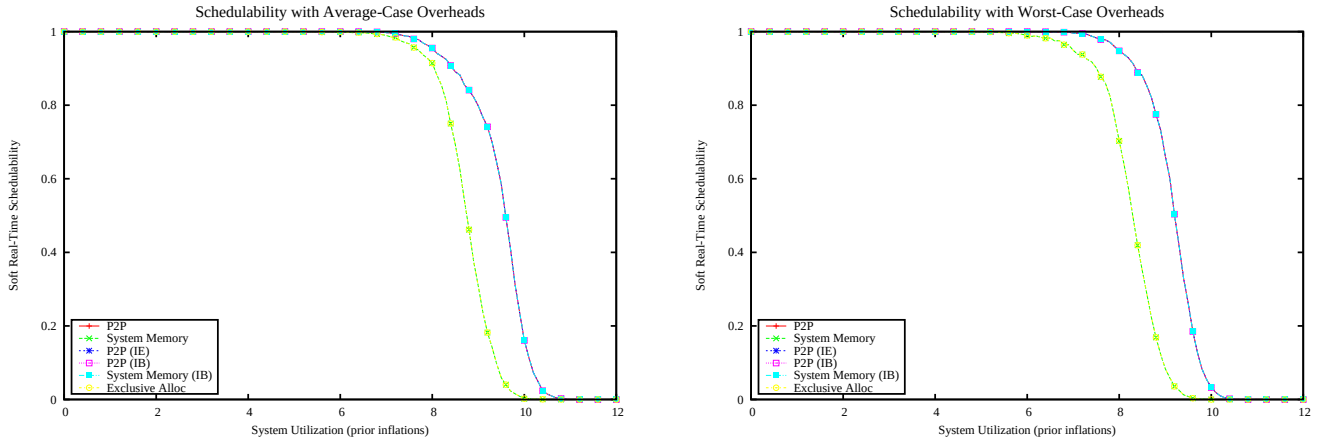

Figure 585: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

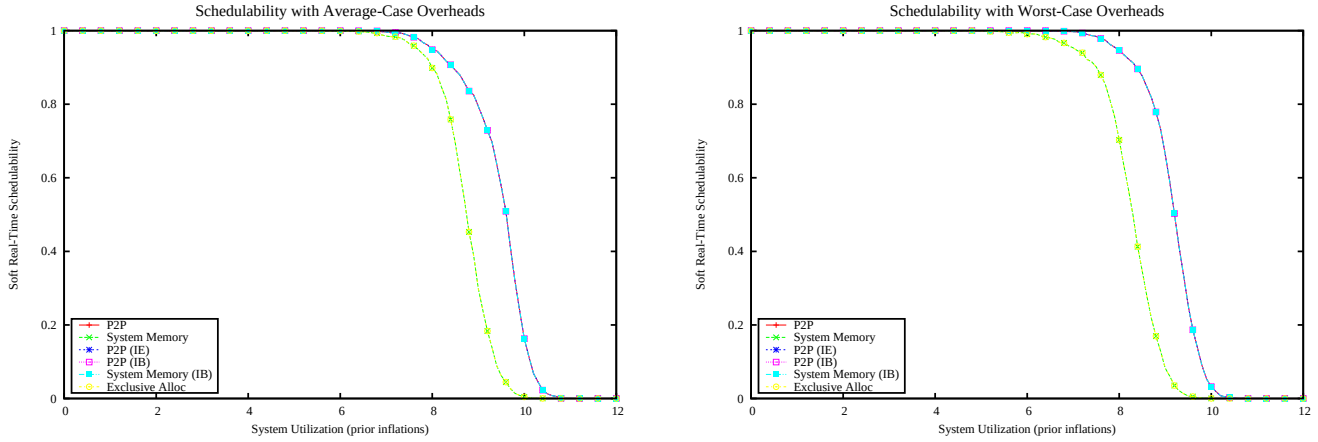

Figure 586: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

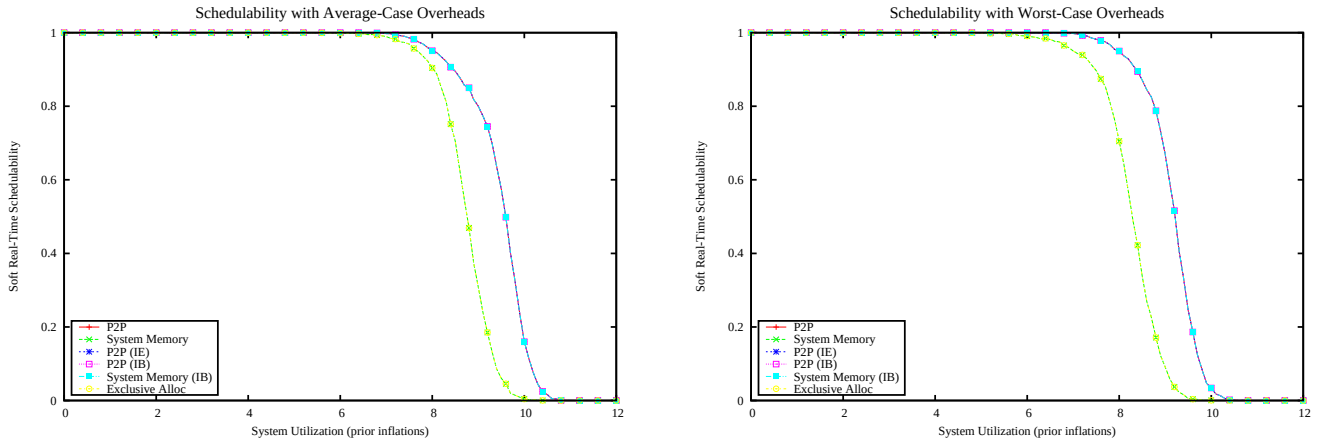

Figure 587: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

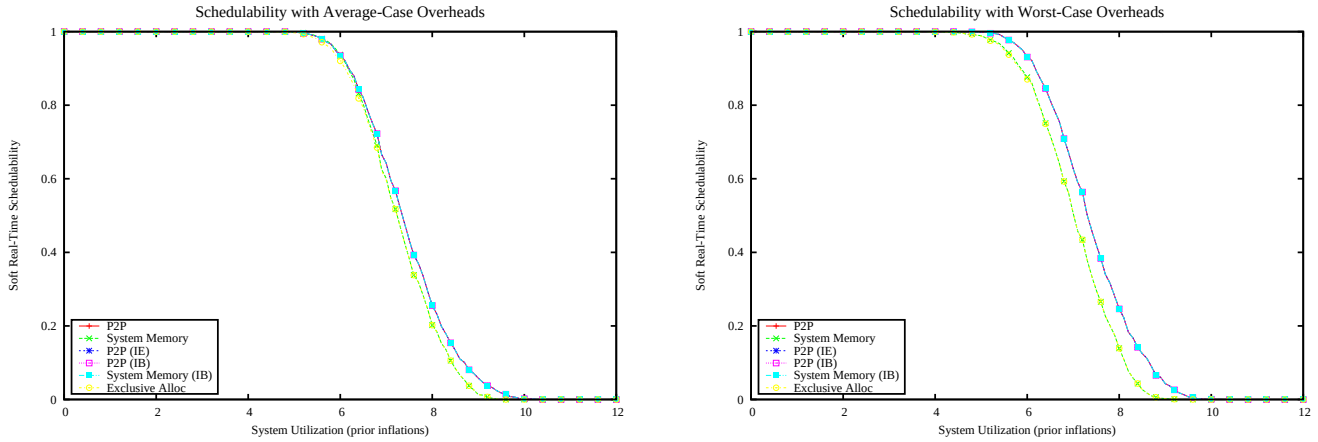

Figure 588: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

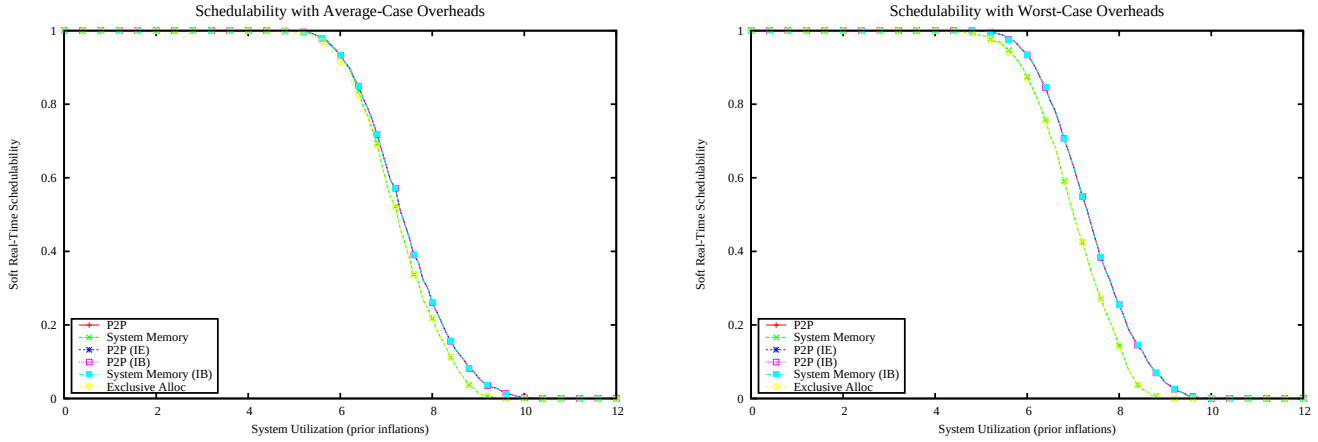

Figure 589: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

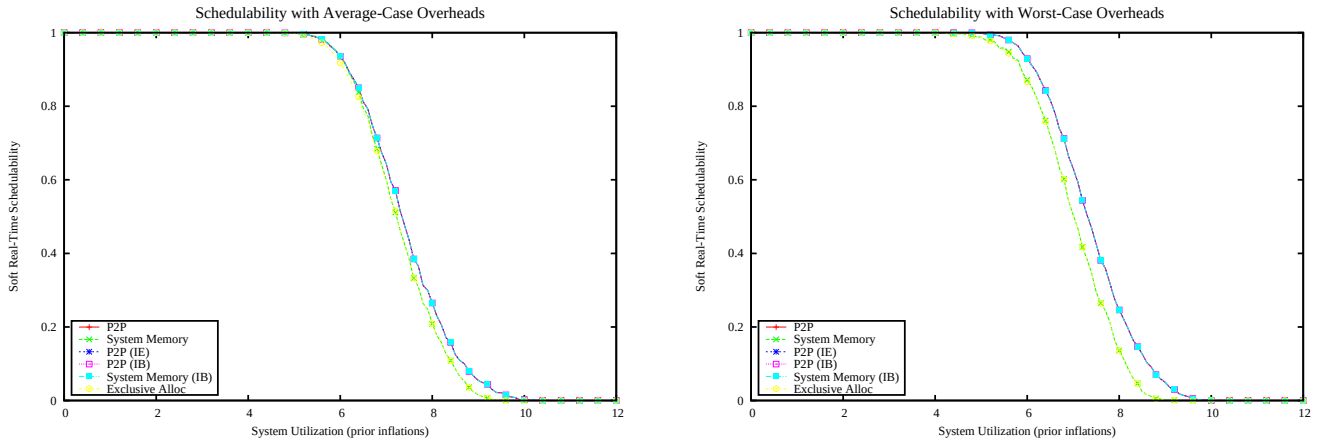

Figure 590: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

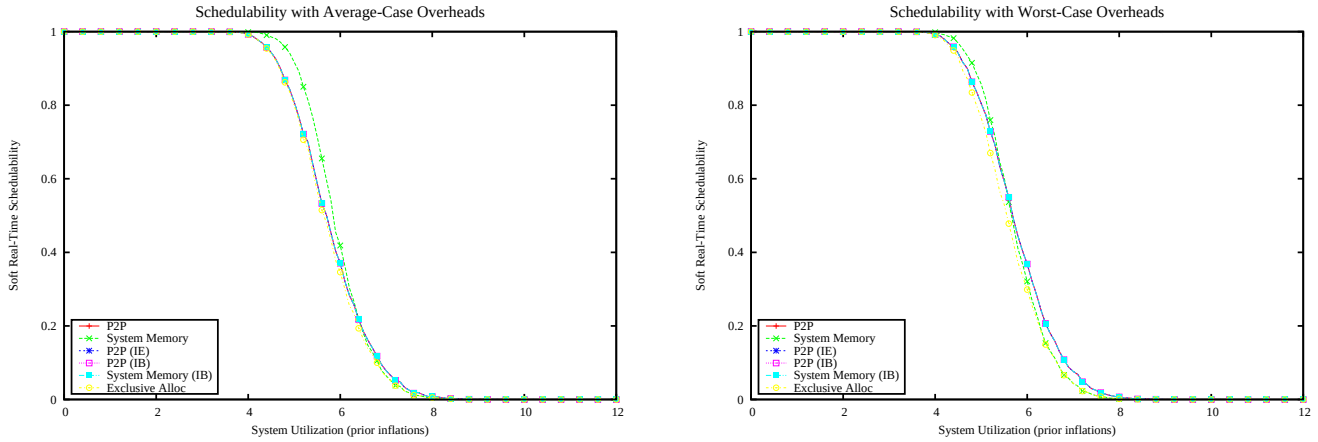

Figure 591: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

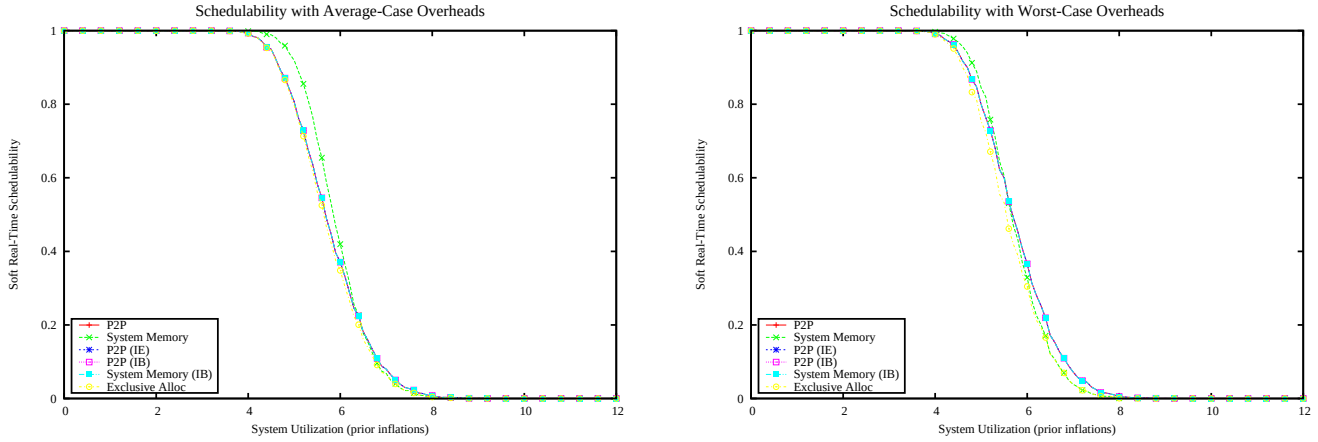

Figure 592: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

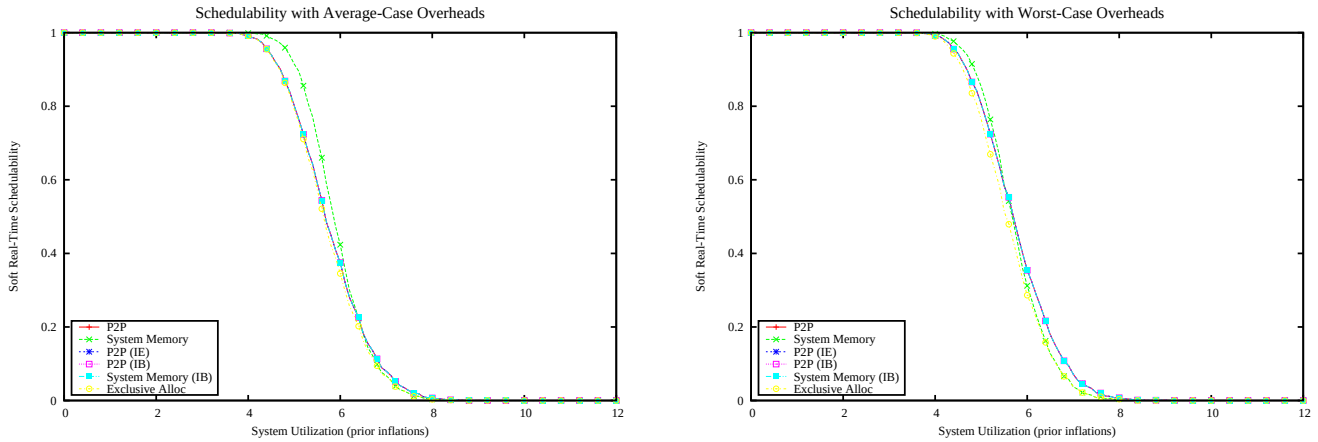

Figure 593: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

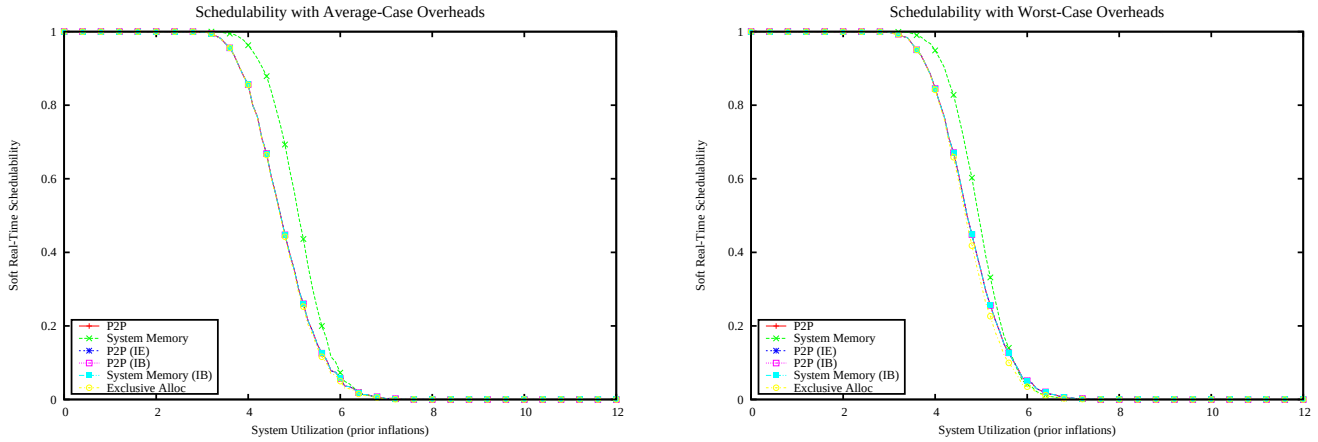

Figure 594: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

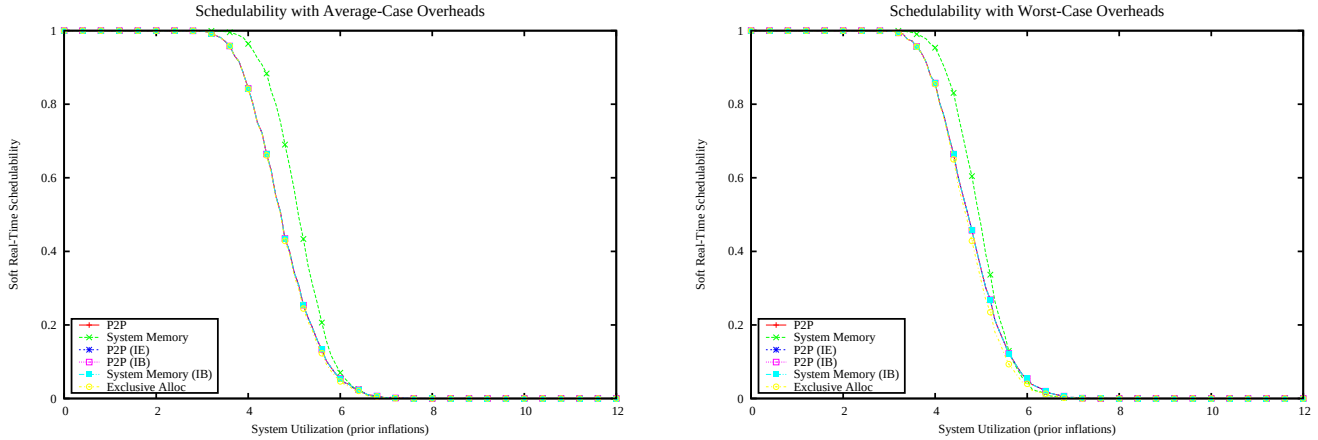

Figure 595: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

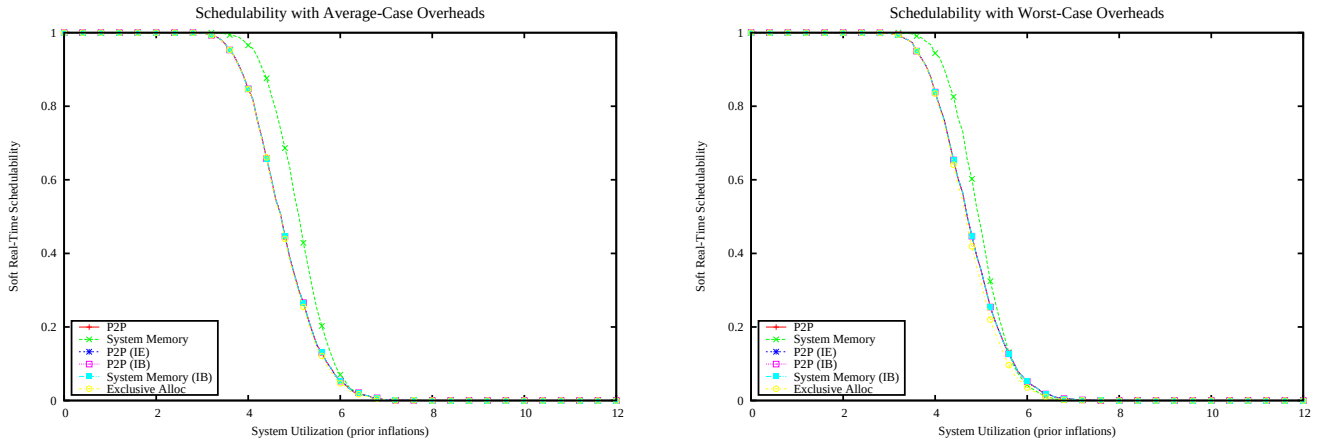

Figure 596: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

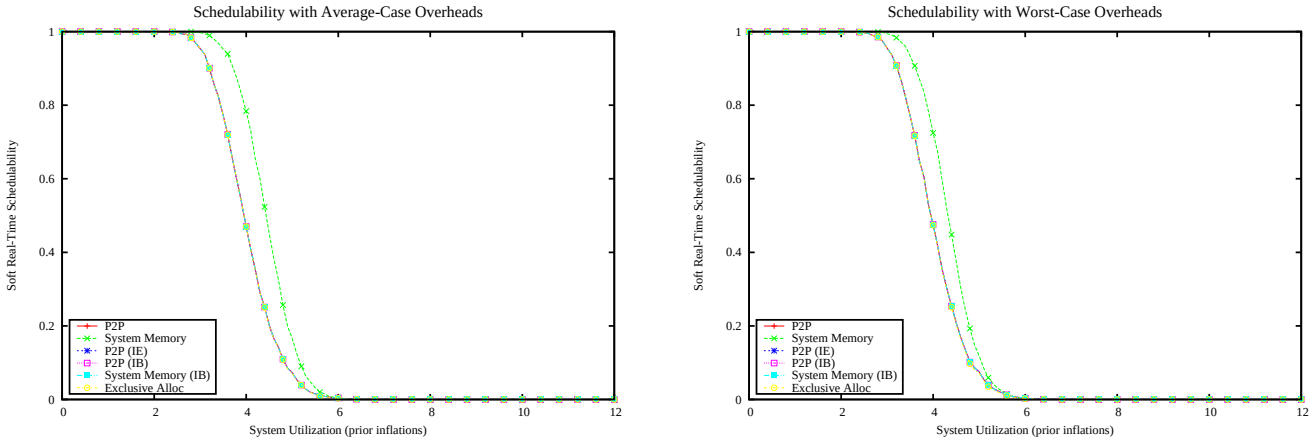

Figure 597: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

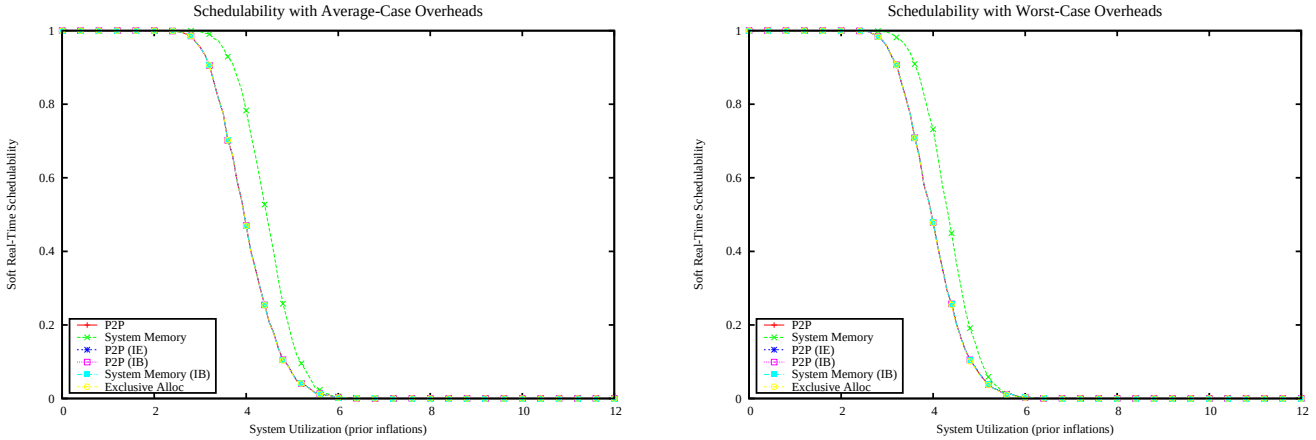

Figure 598: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

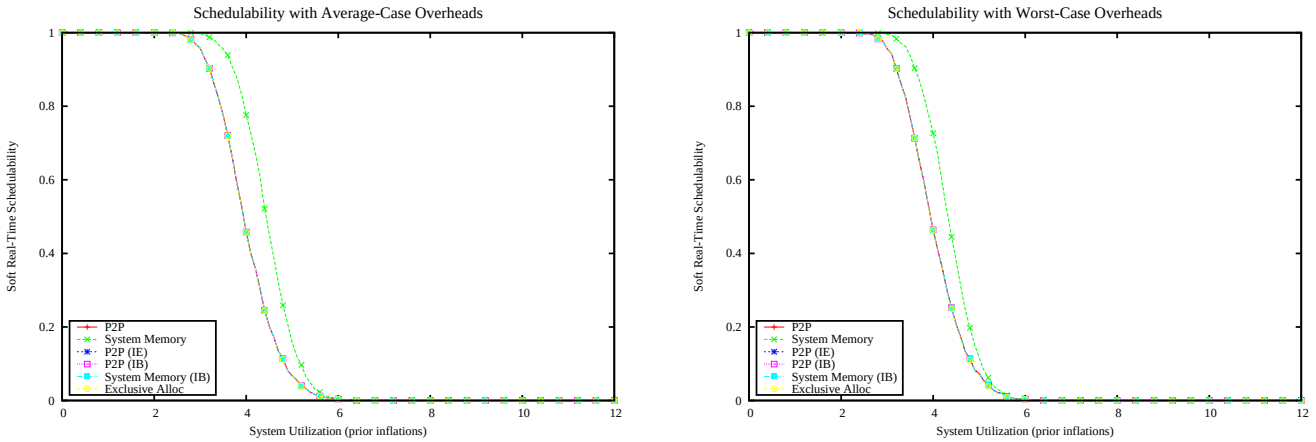

Figure 599: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

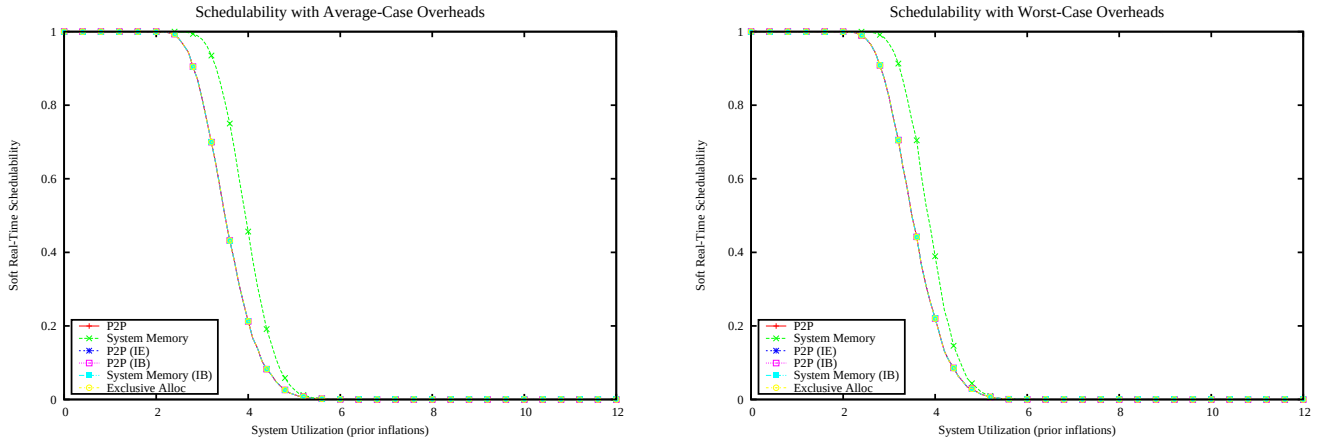

Figure 600: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

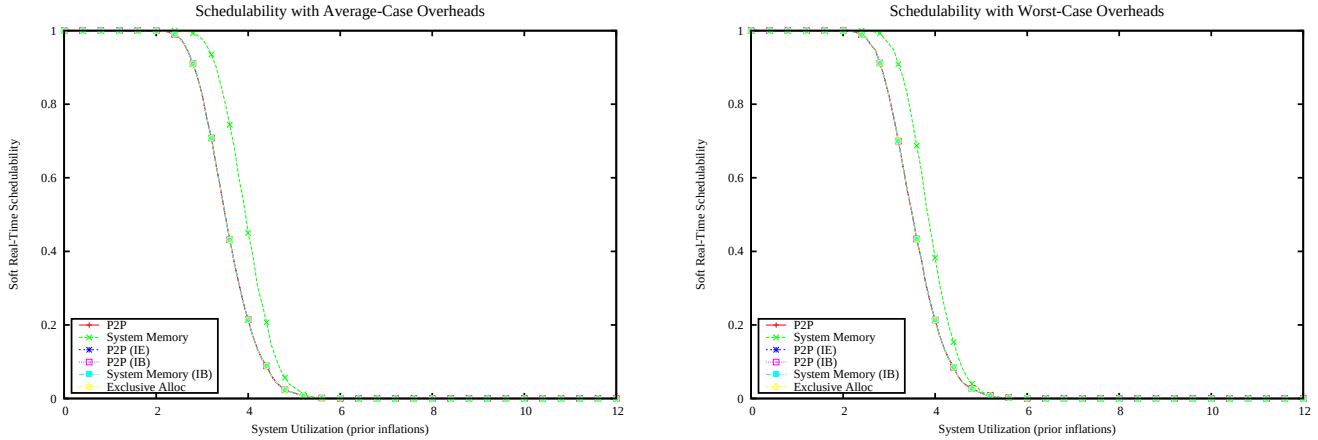

Figure 601: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

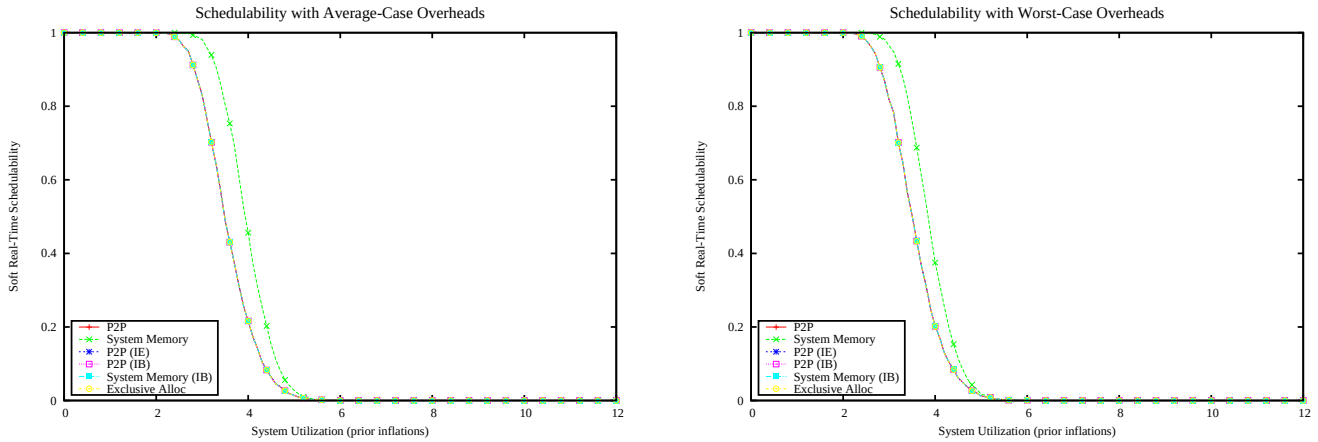

Figure 602: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

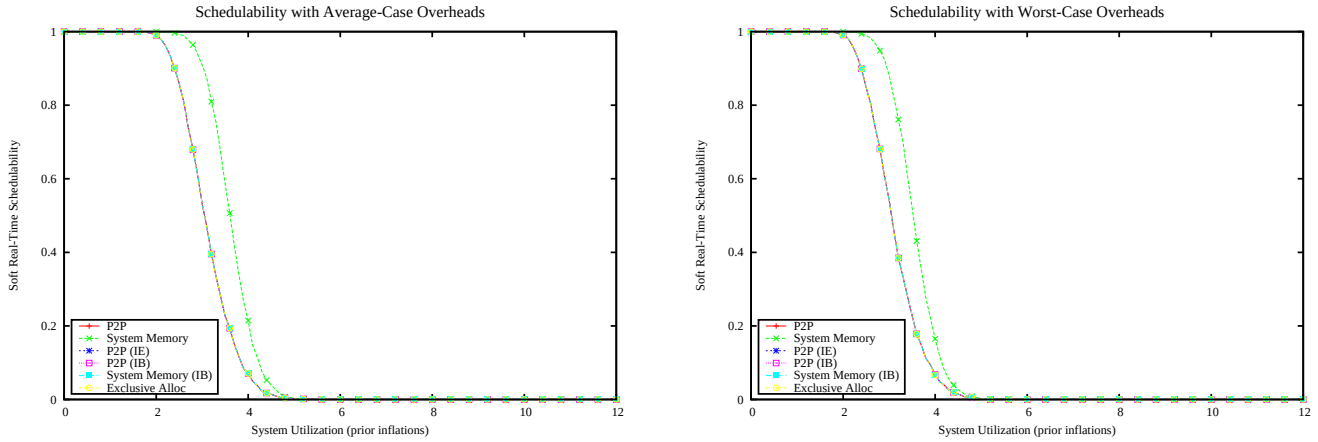

Figure 603: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

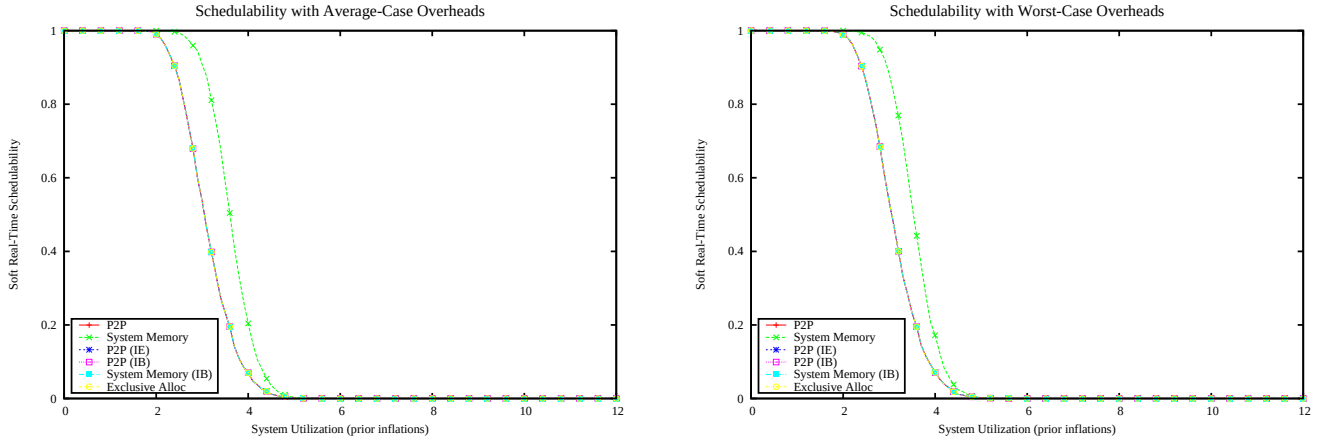

Figure 604: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

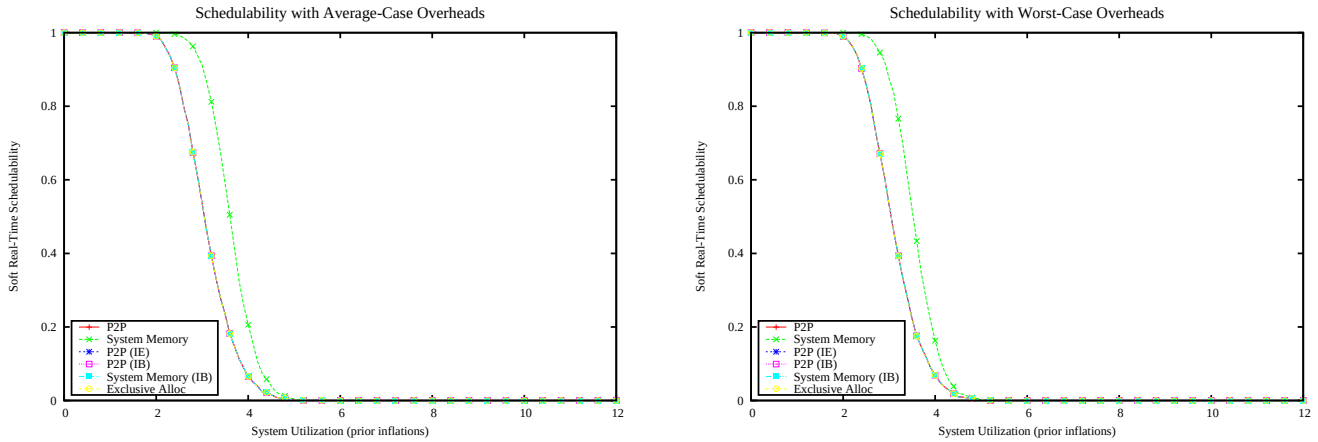

Figure 605: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

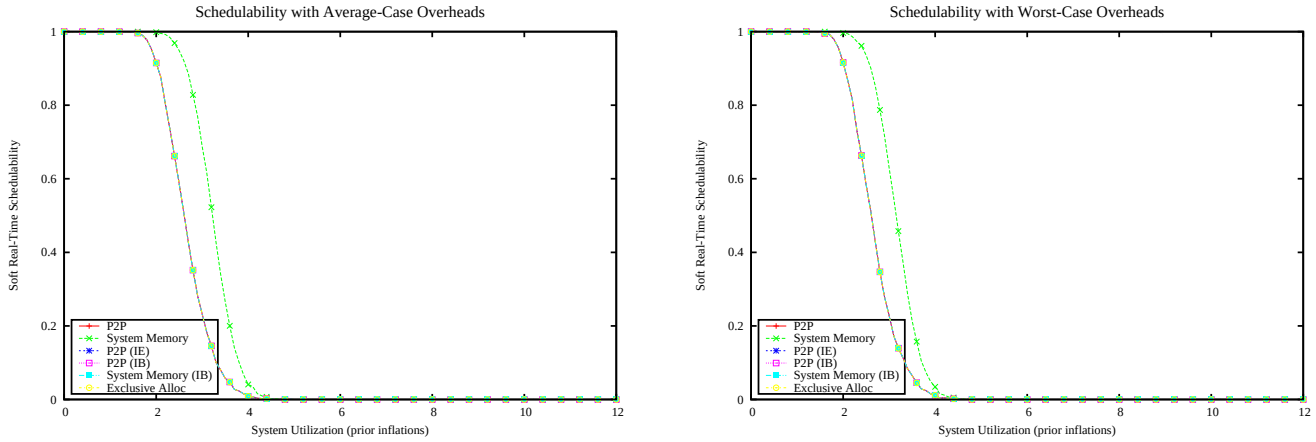

Figure 606: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

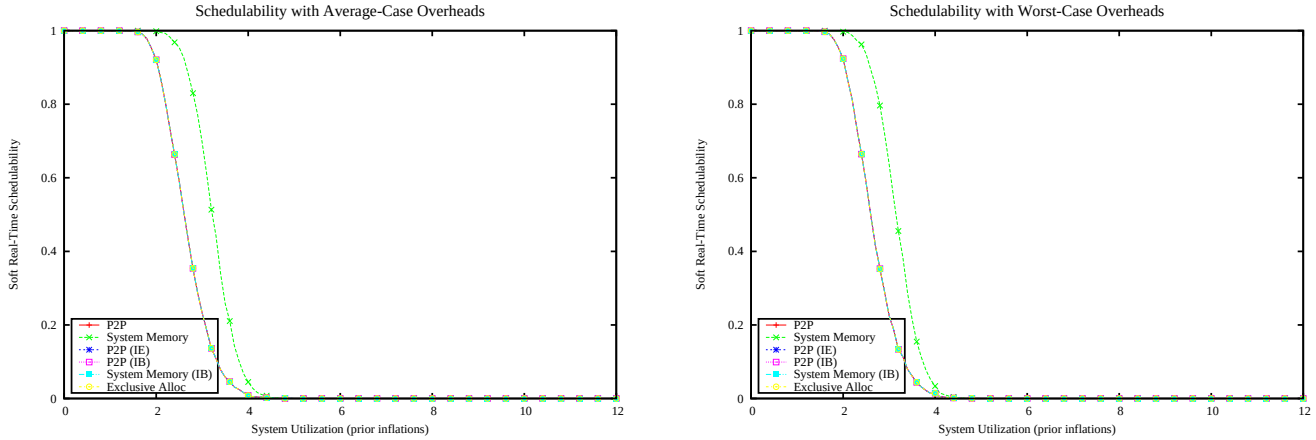

Figure 607: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

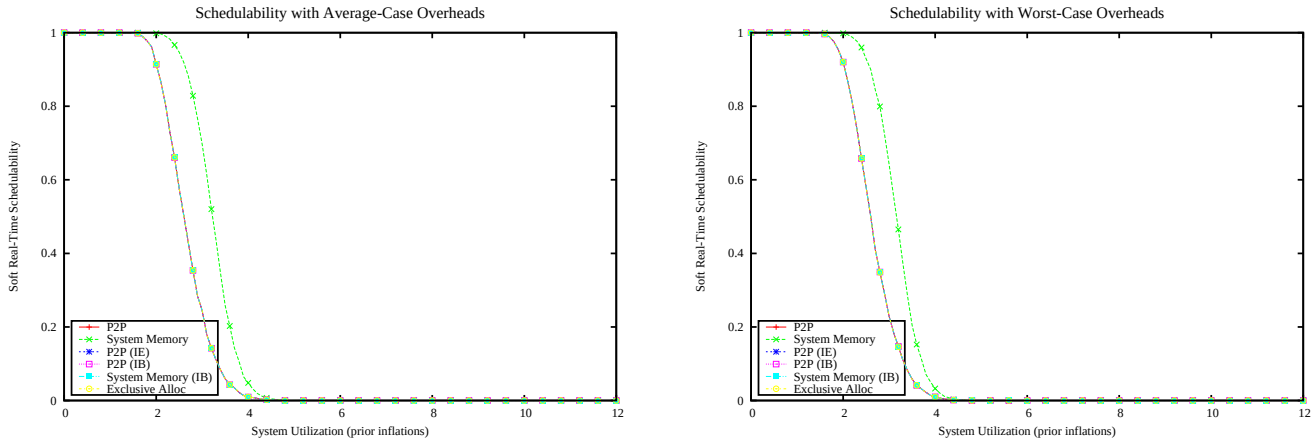

Figure 608: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

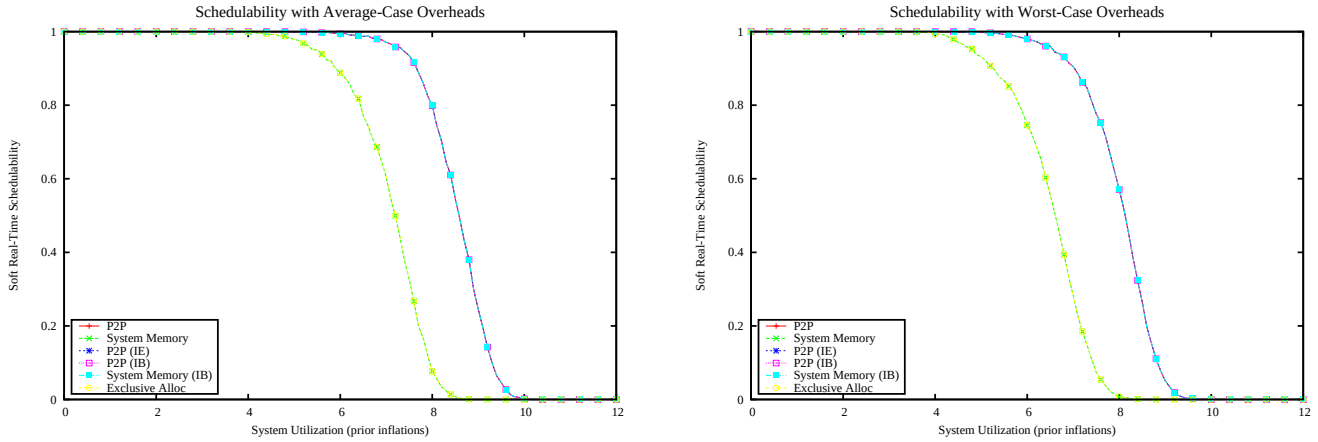

Figure 609: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

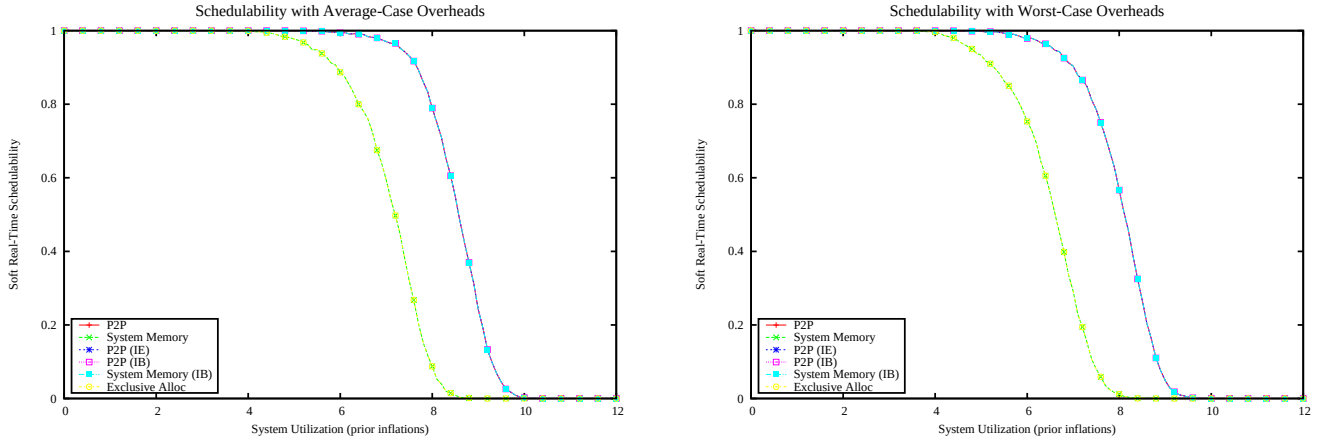

Figure 610: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

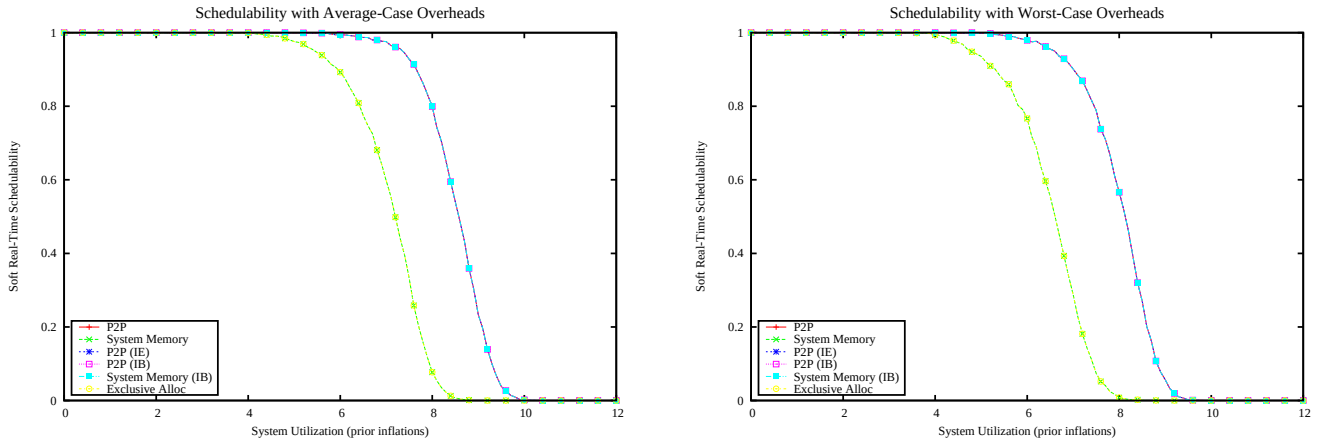

Figure 611: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

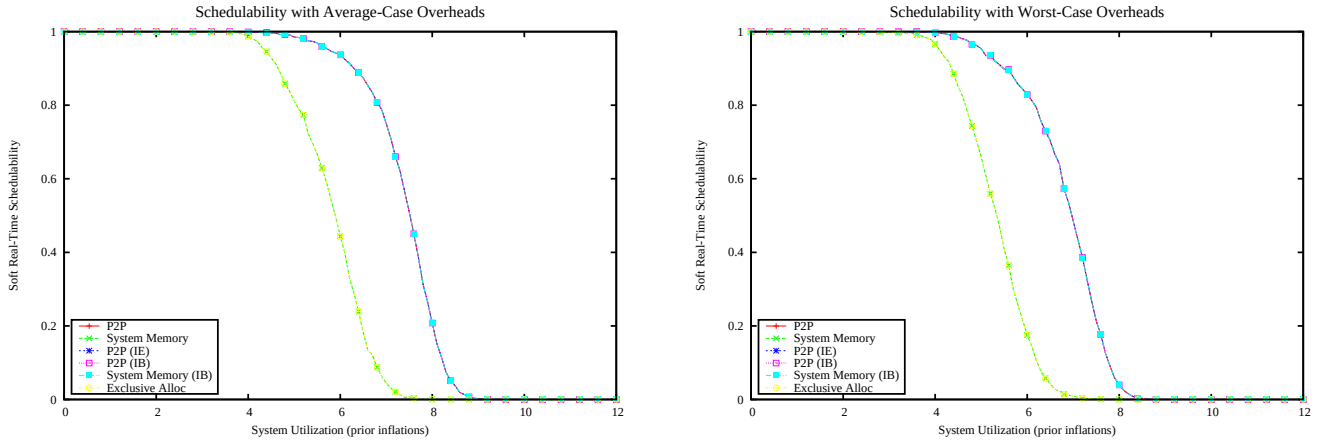

Figure 612: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

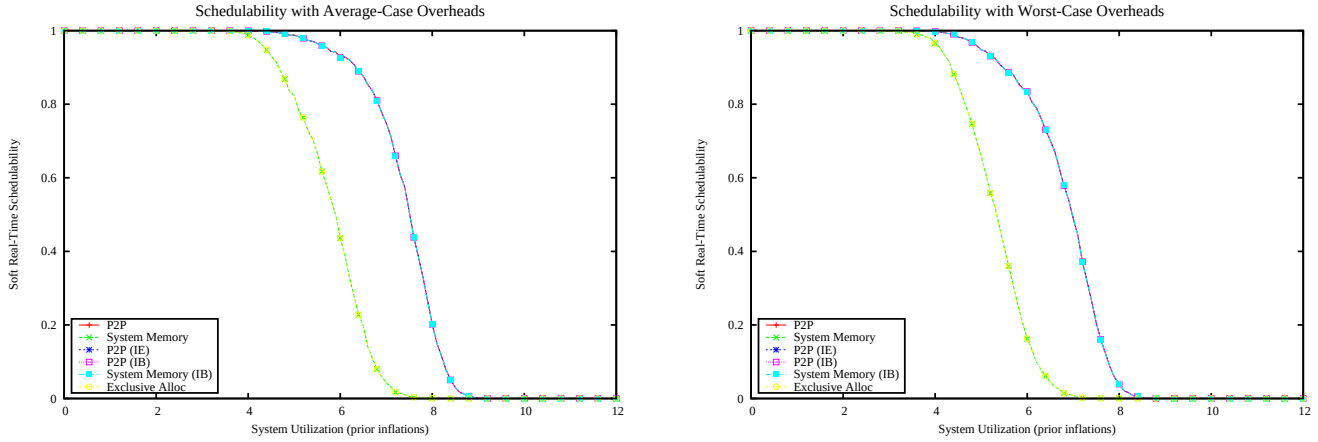

Figure 613: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

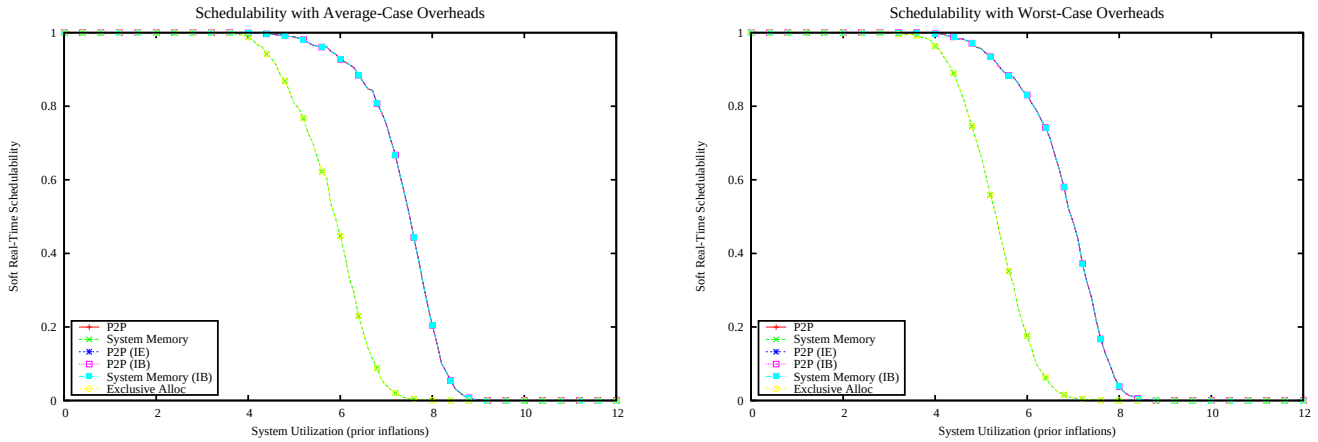

Figure 614: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

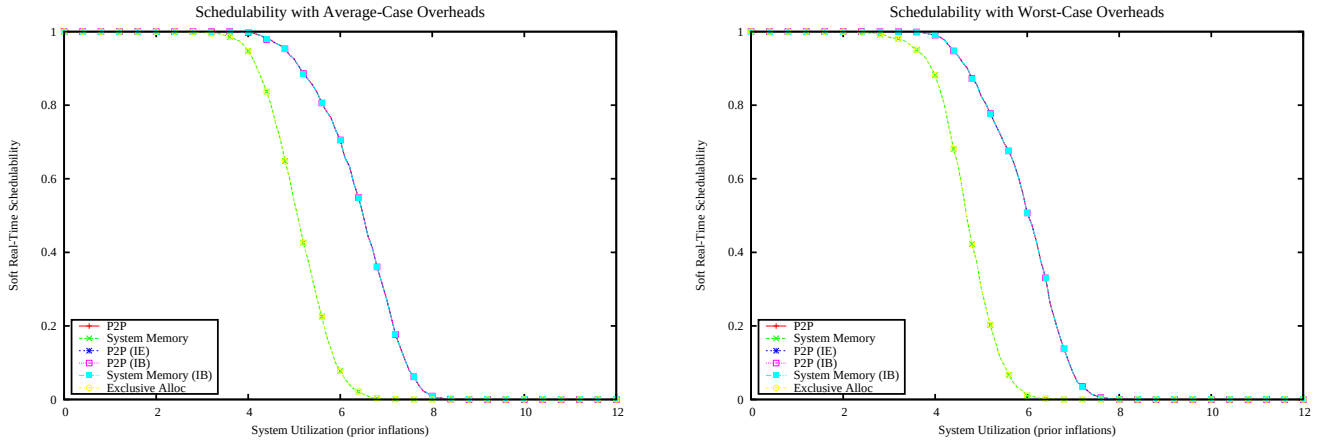

Figure 615: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

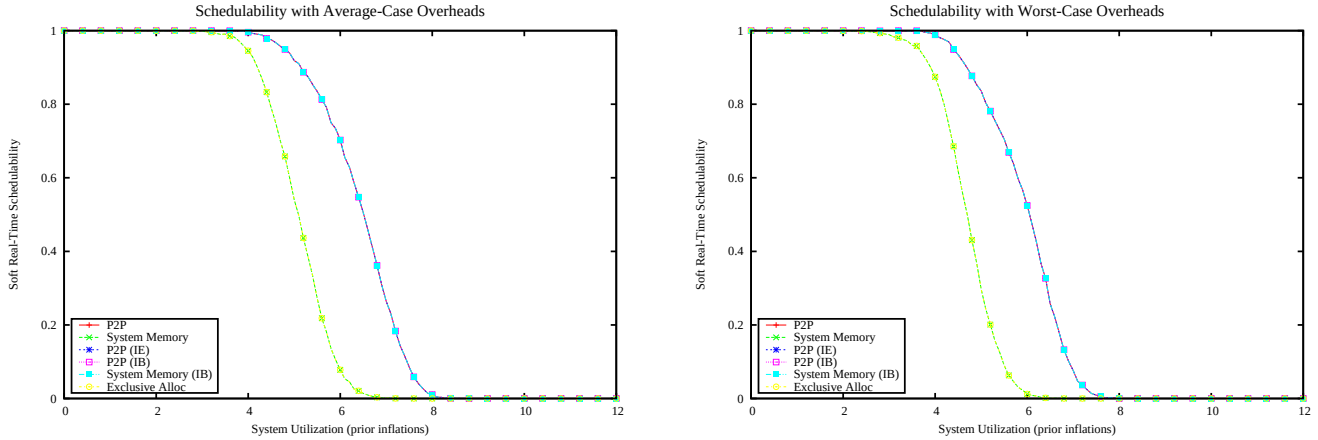

Figure 616: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

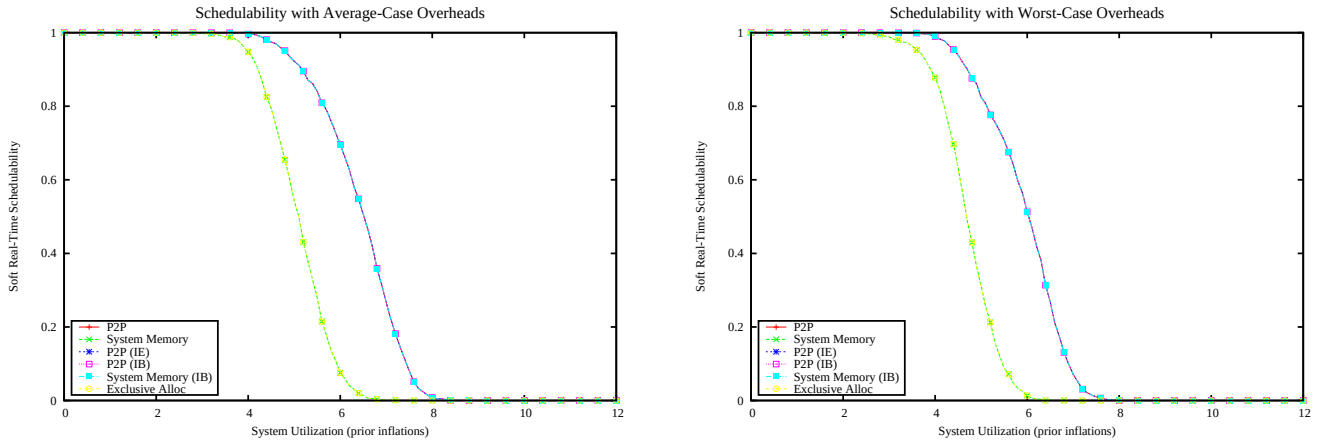

Figure 617: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

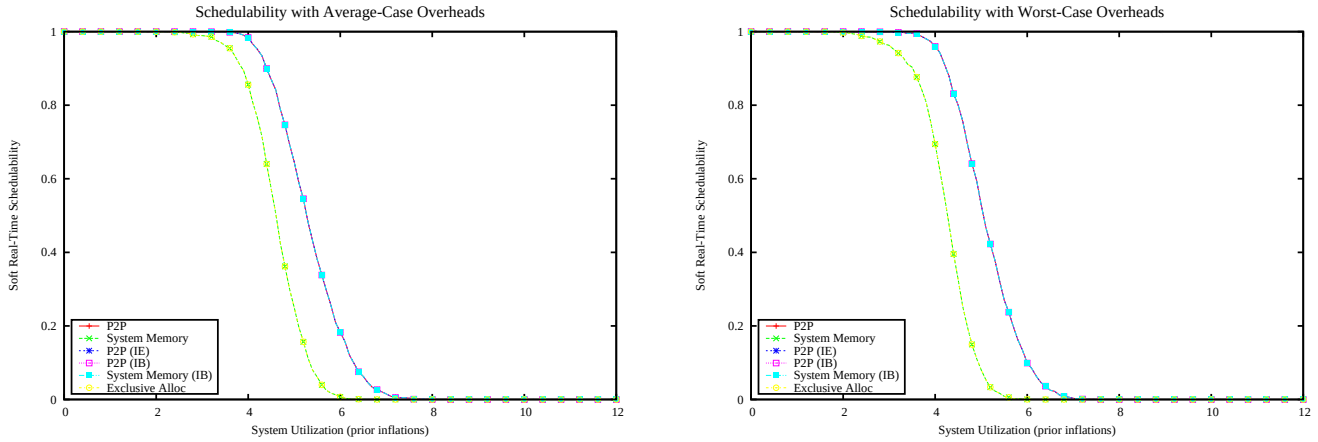

Figure 618: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

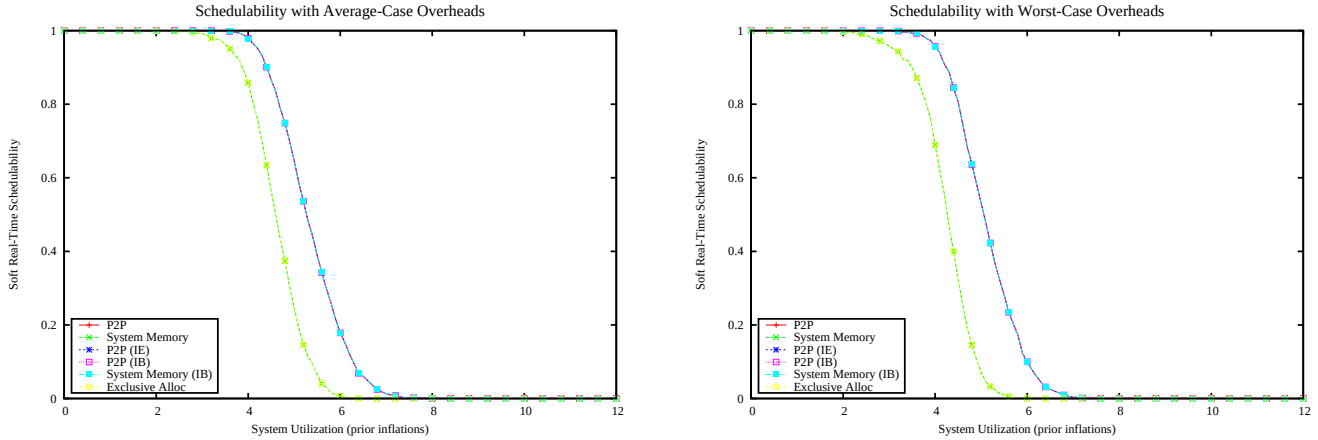

Figure 619: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

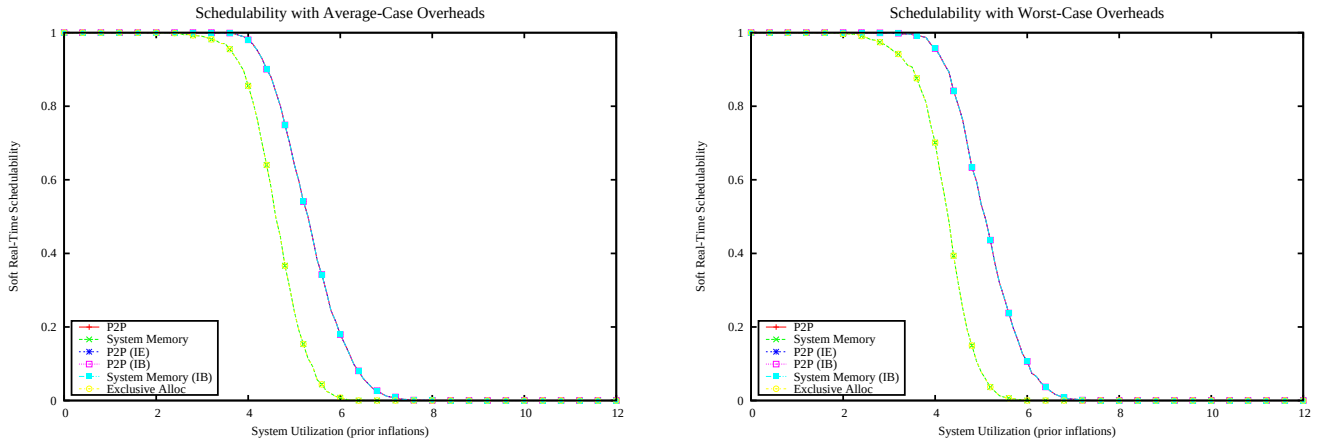

Figure 620: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

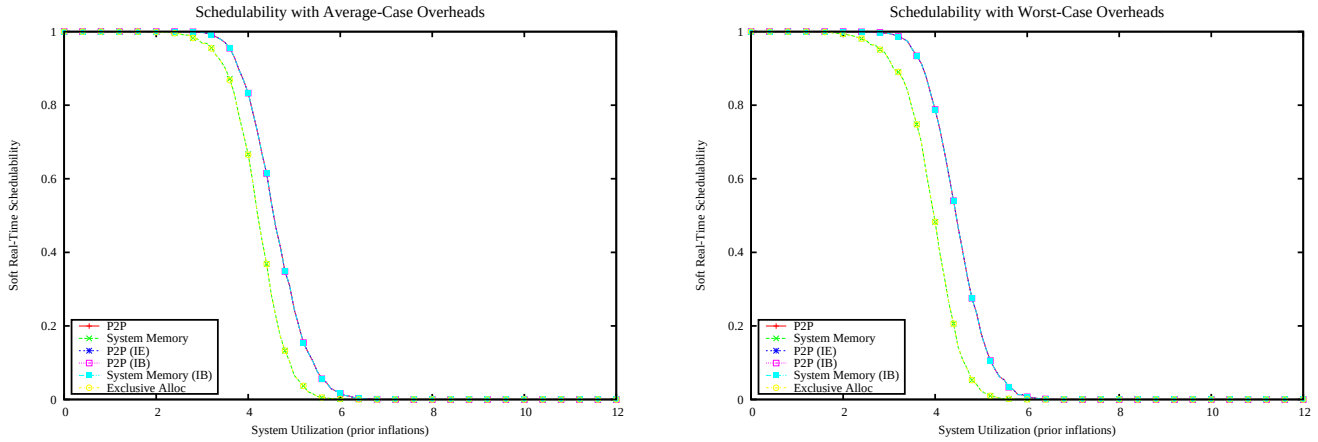

Figure 621: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

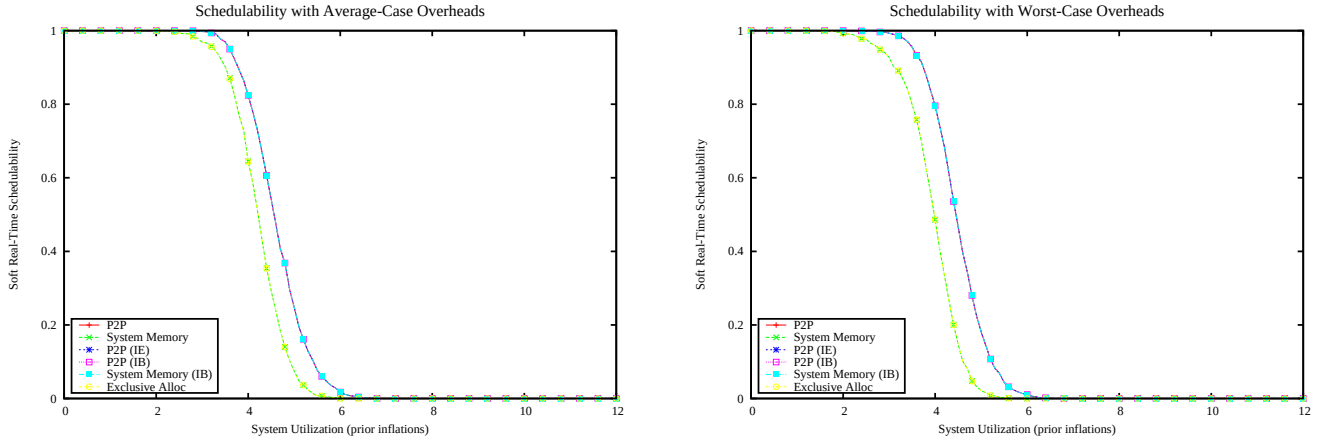

Figure 622: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

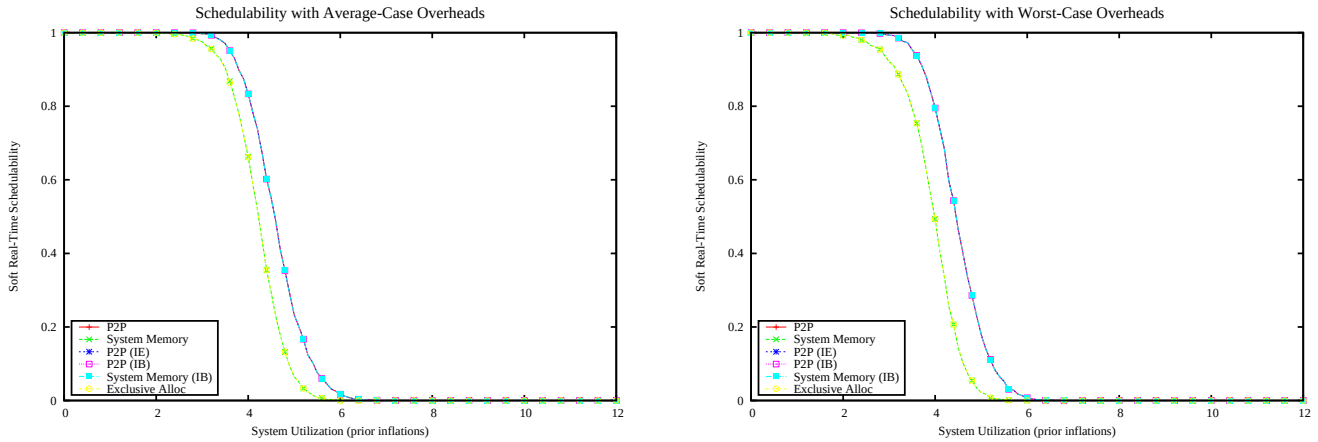

Figure 623: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

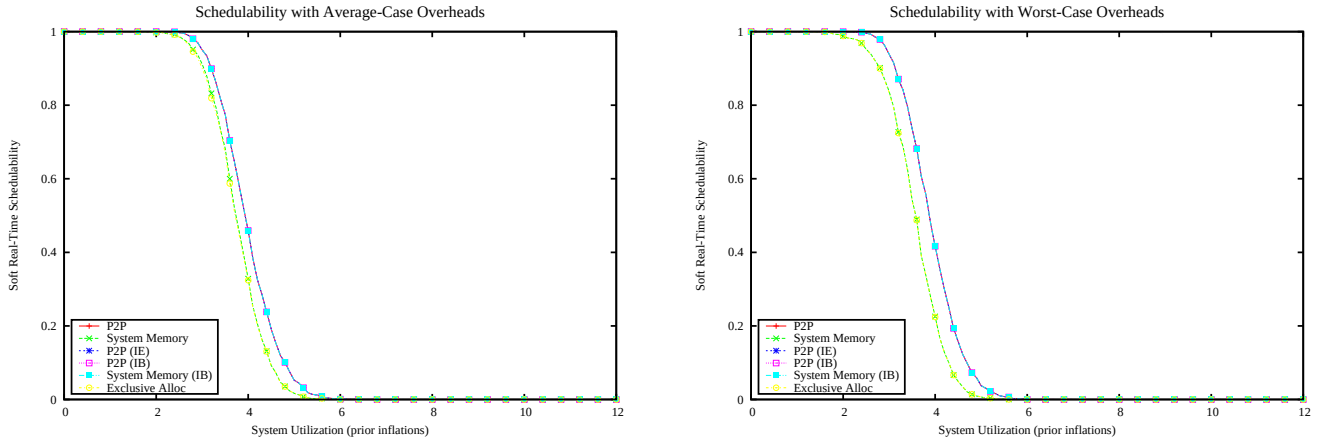

Figure 624: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

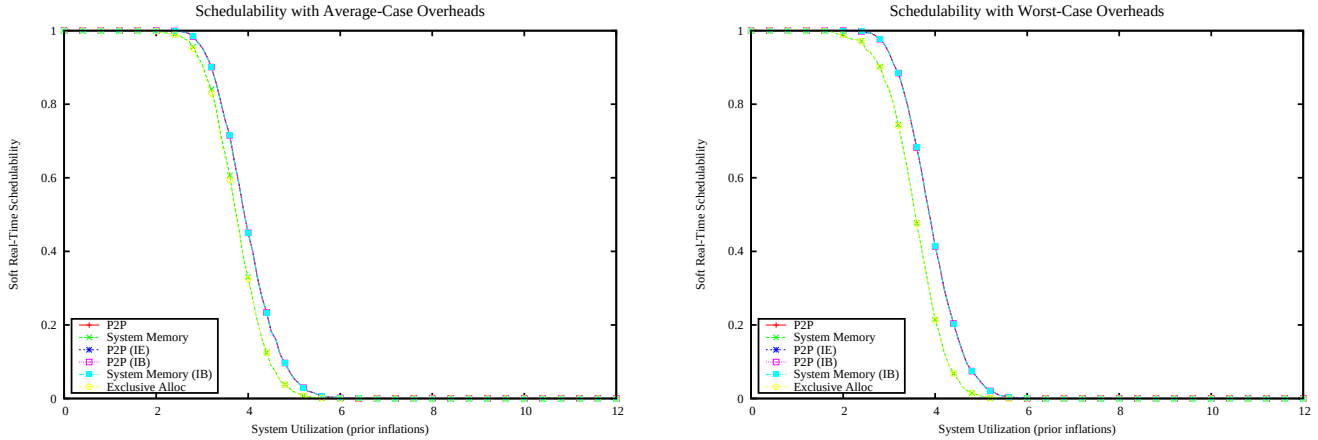

Figure 625: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

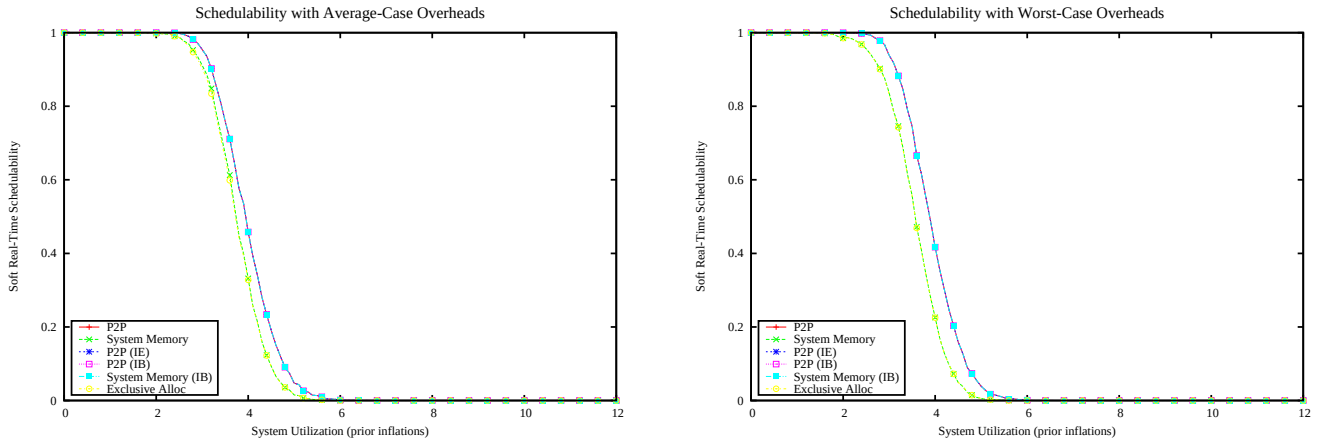

Figure 626: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

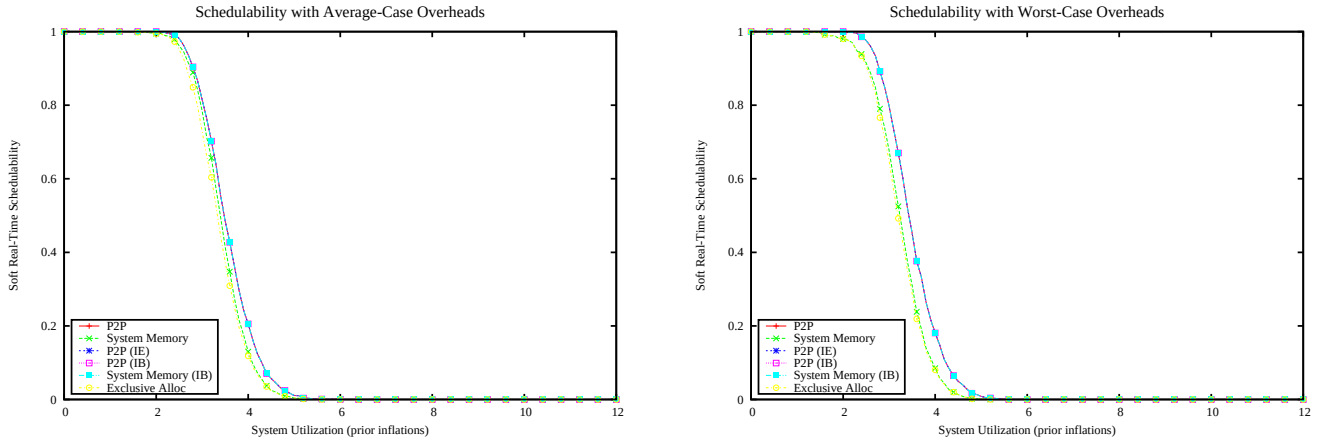

Figure 627: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

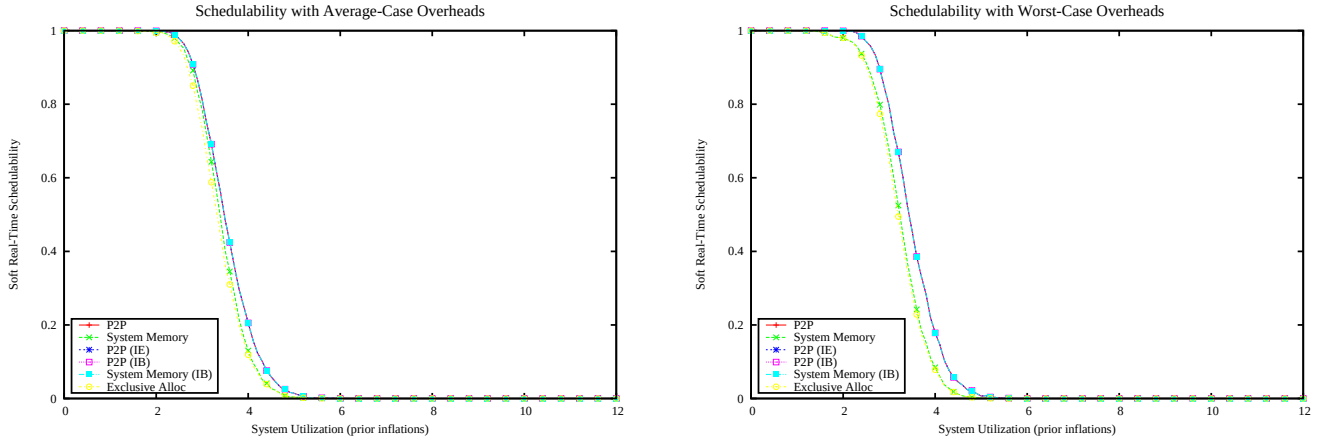

Figure 628: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

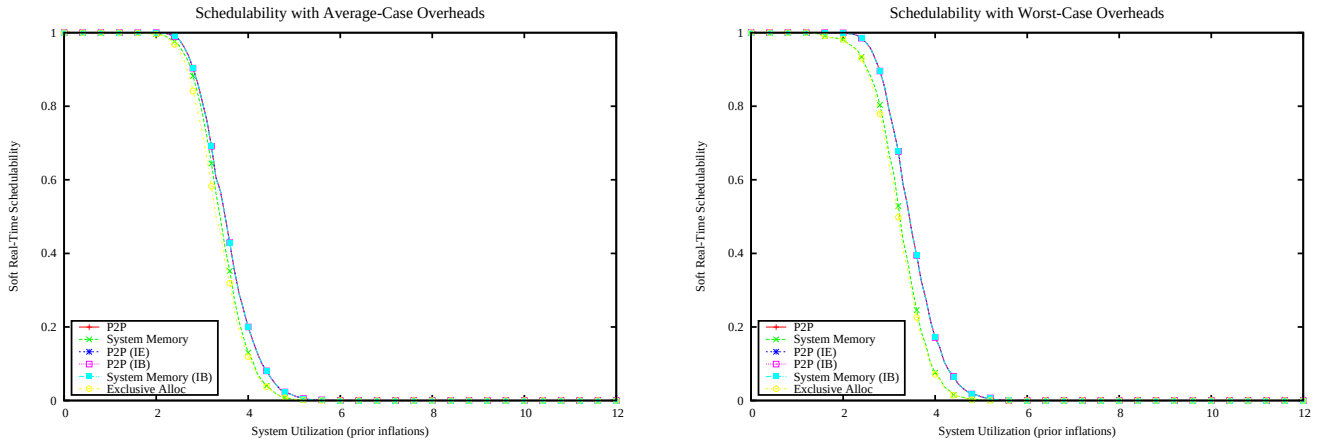

Figure 629: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

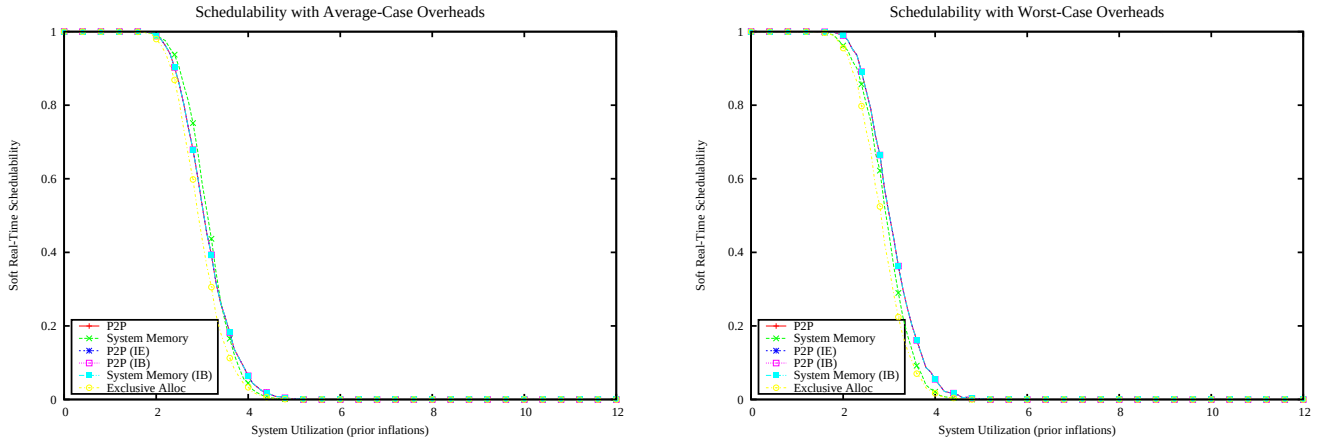

Figure 630: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

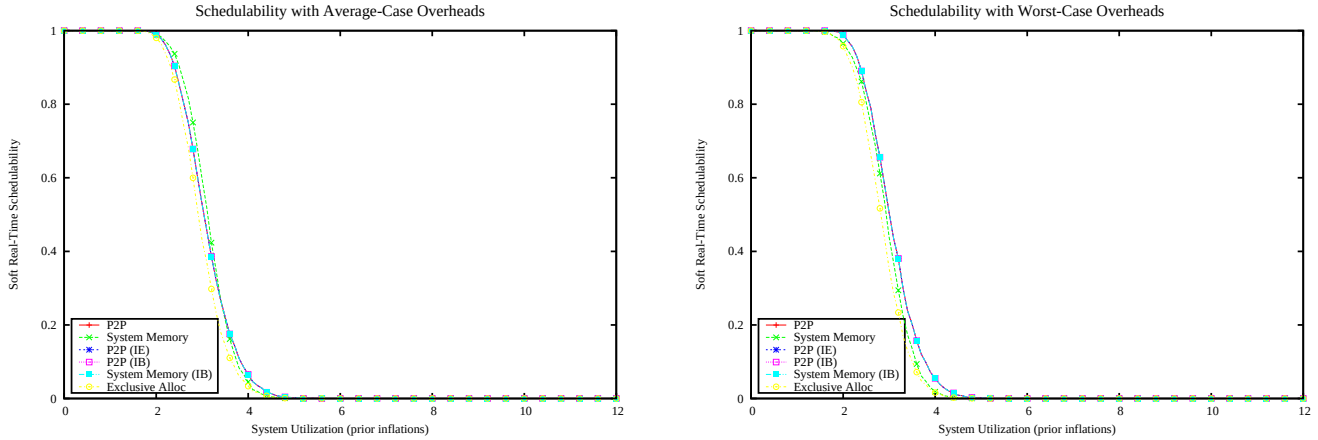

Figure 631: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

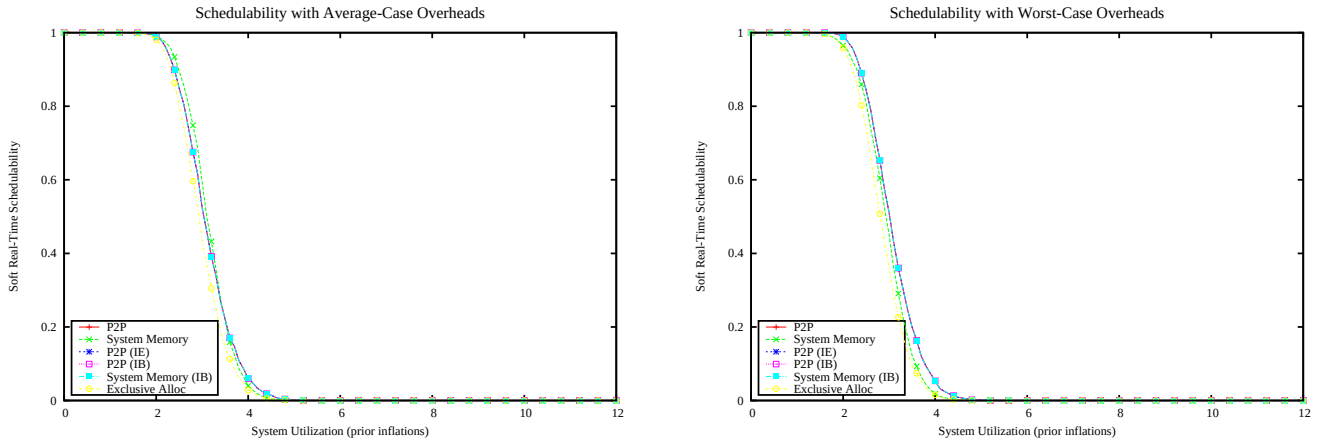

Figure 632: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

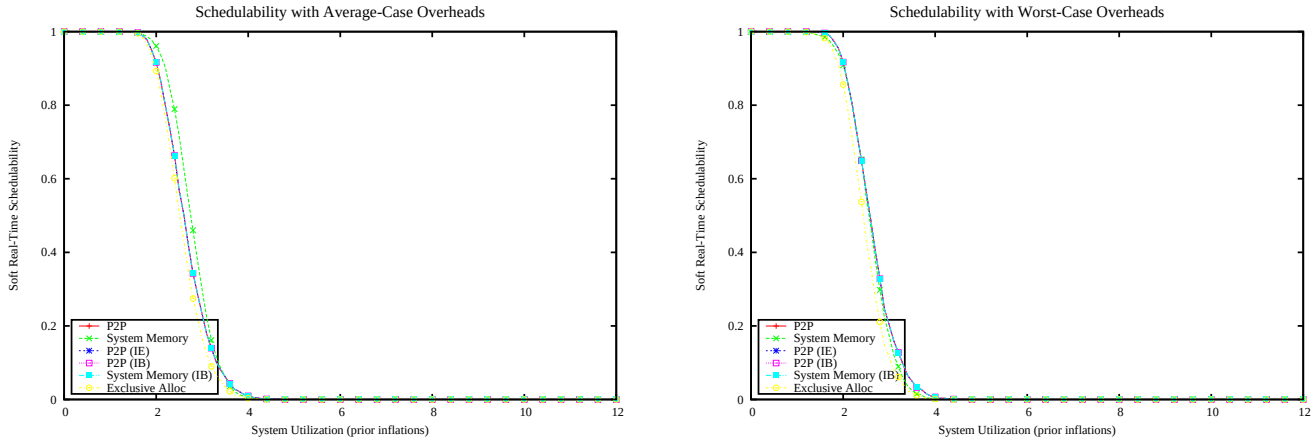

Figure 633: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

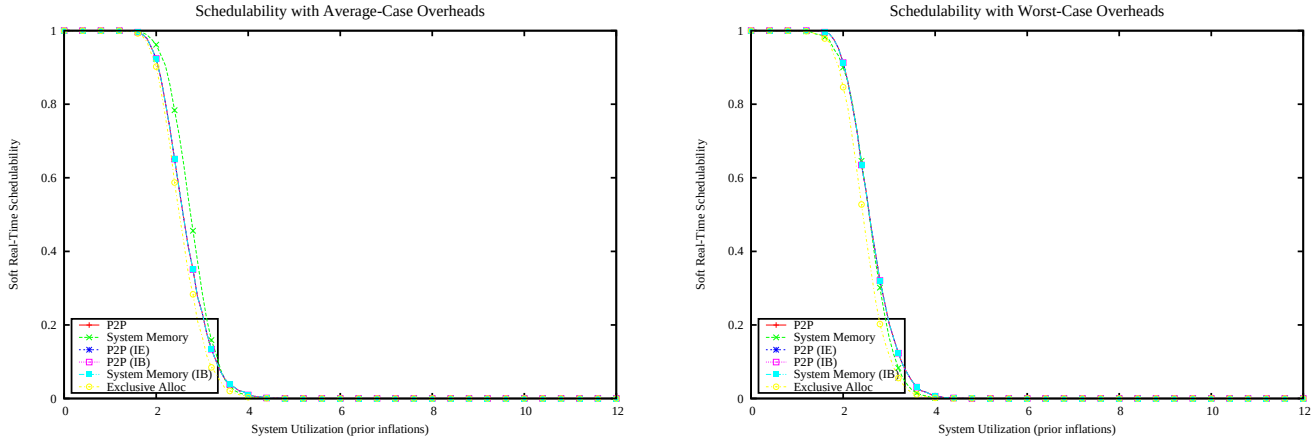

Figure 634: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

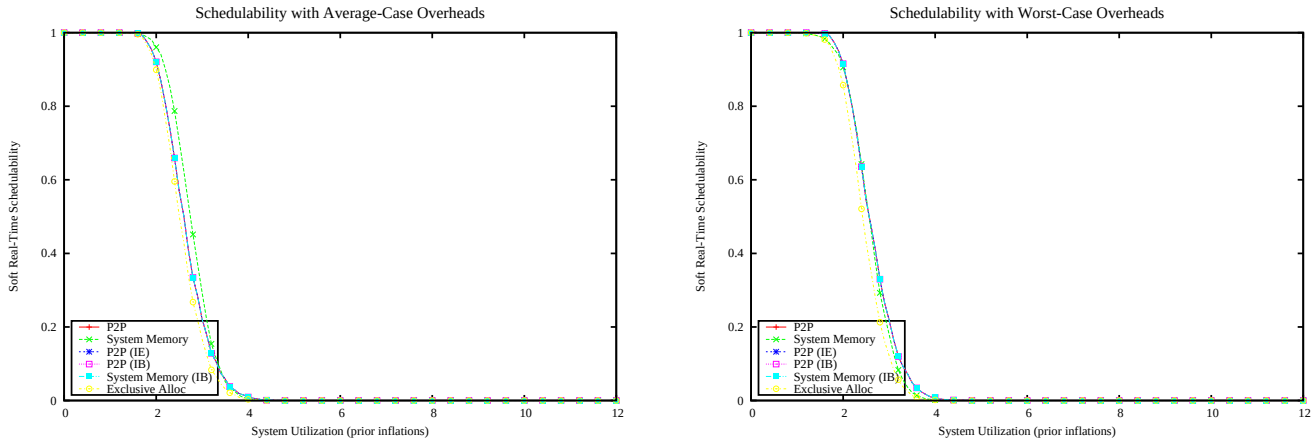

Figure 635: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

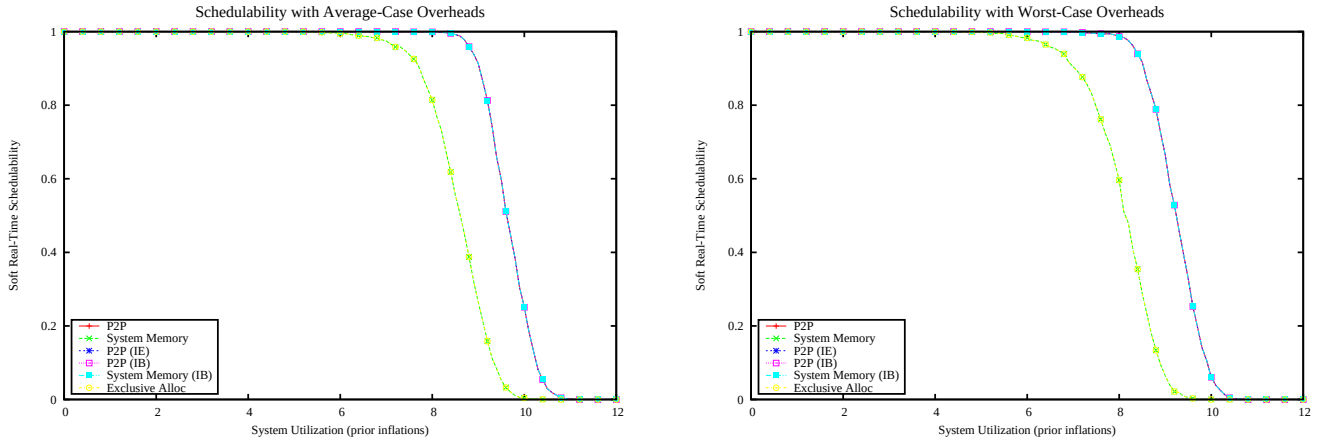

Figure 636: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

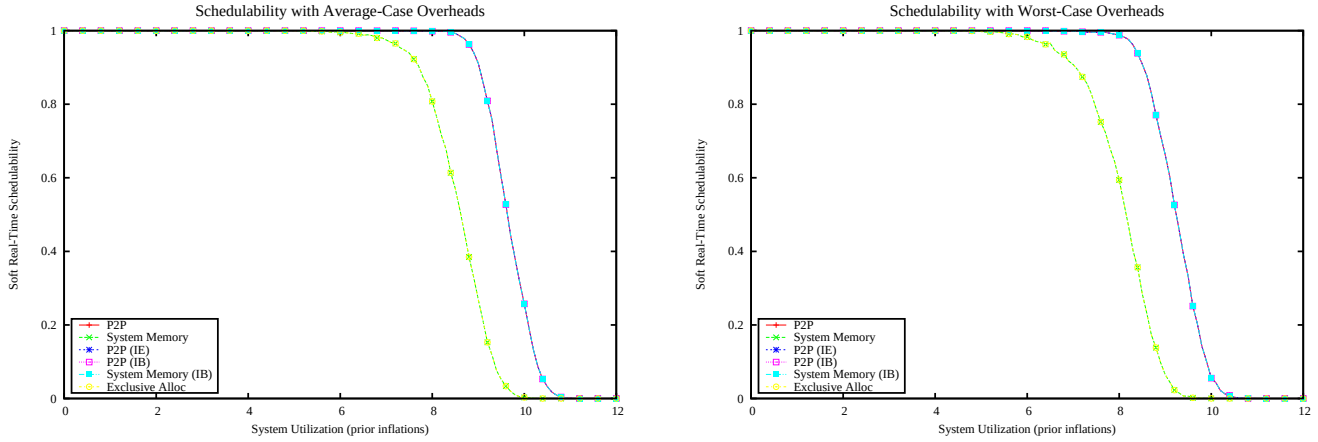

Figure 637: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

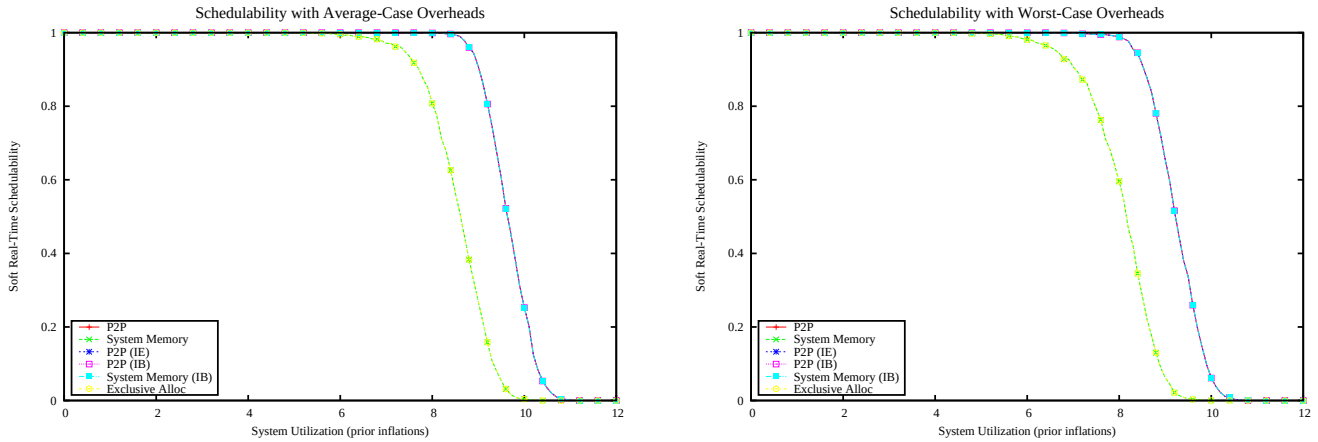

Figure 638: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

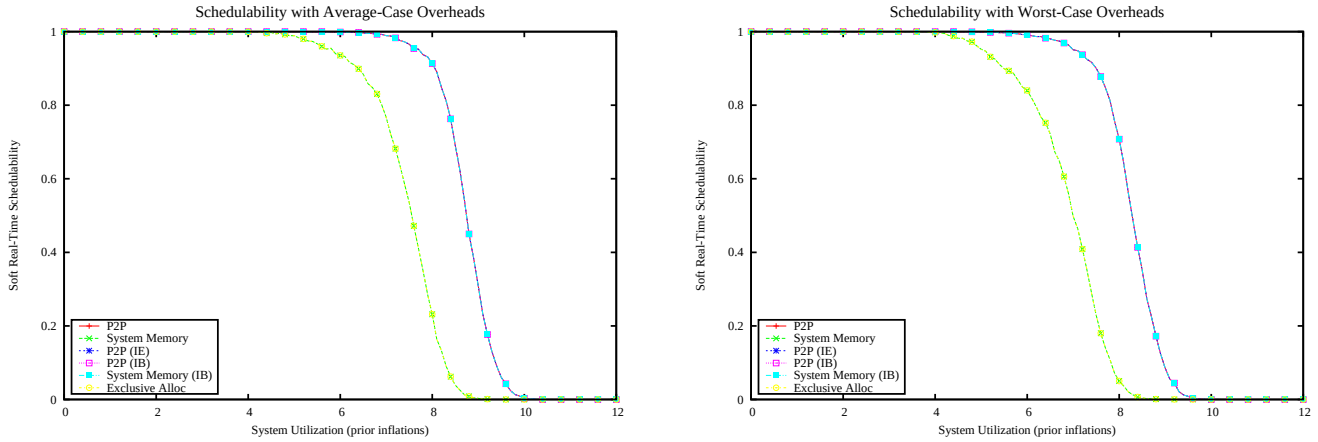

Figure 639: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

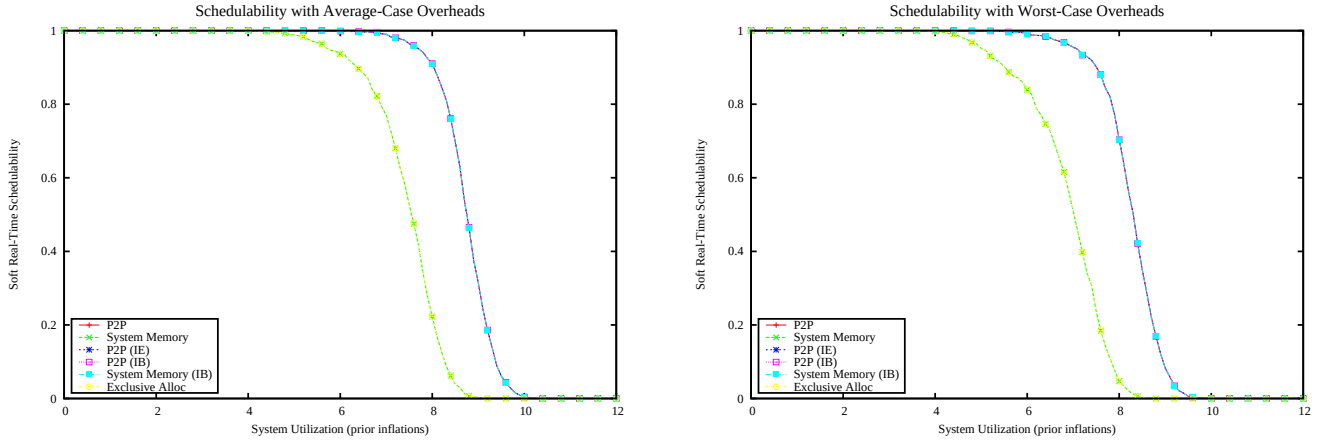

Figure 640: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

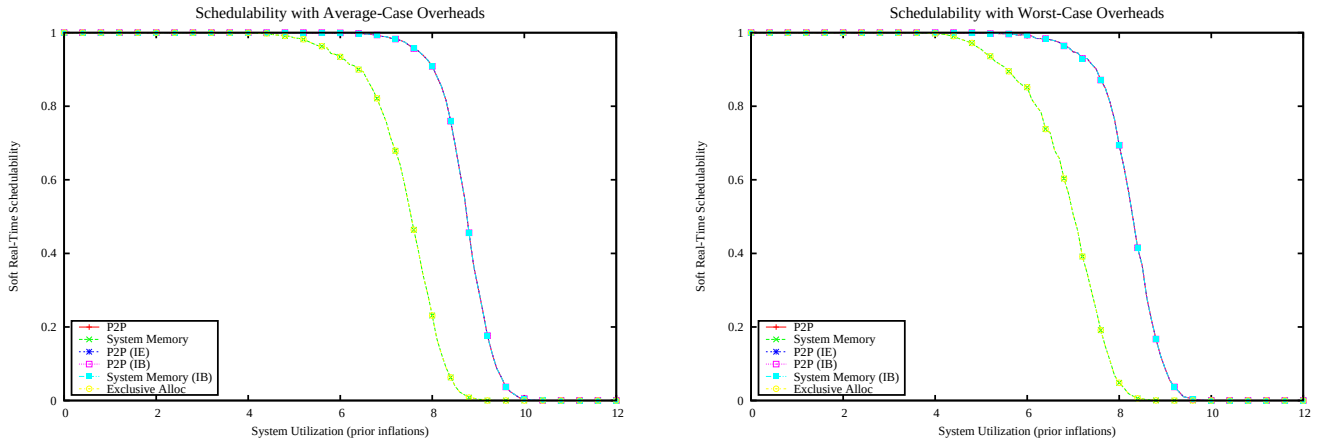

Figure 641: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

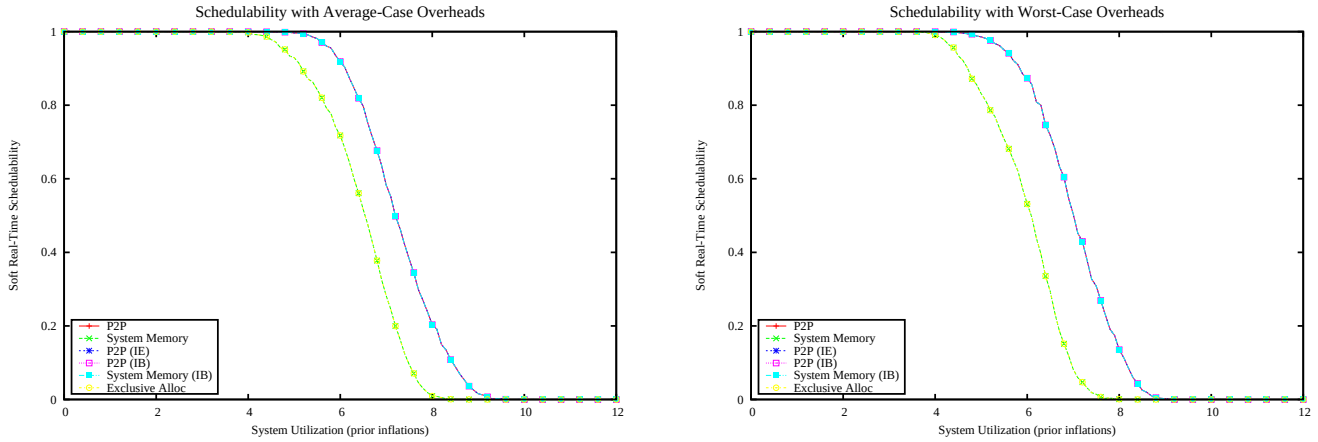

Figure 642: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

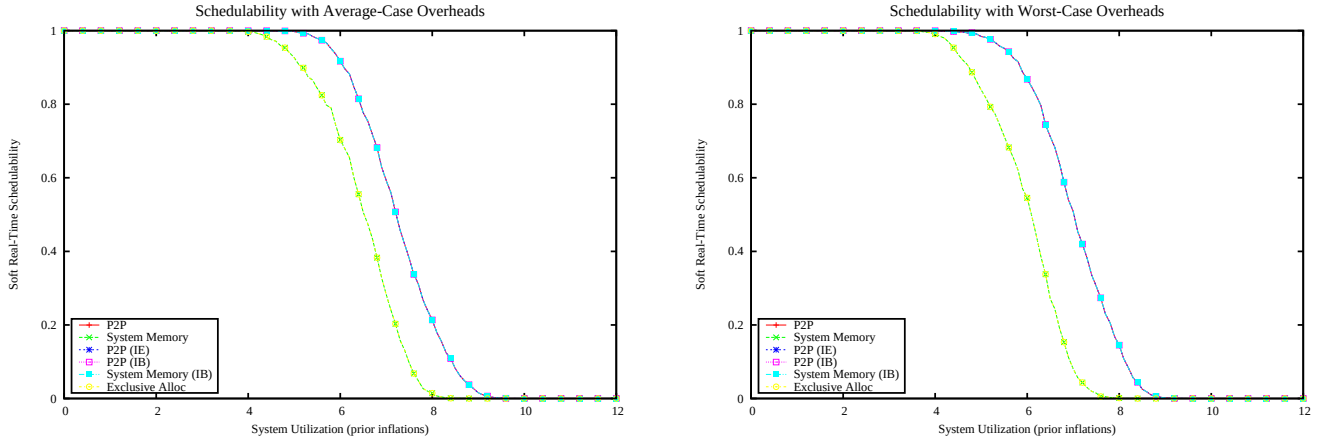

Figure 643: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

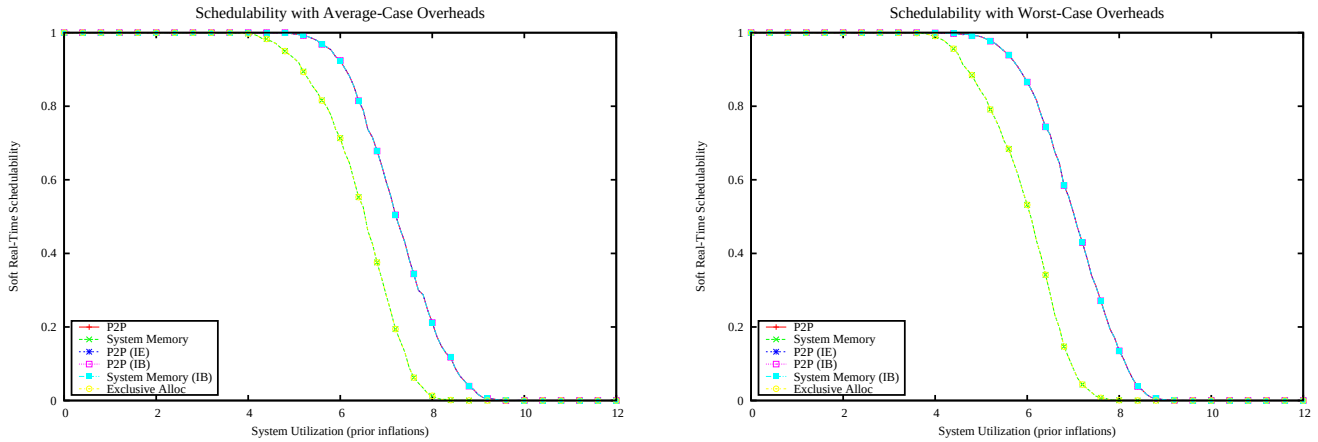

Figure 644: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

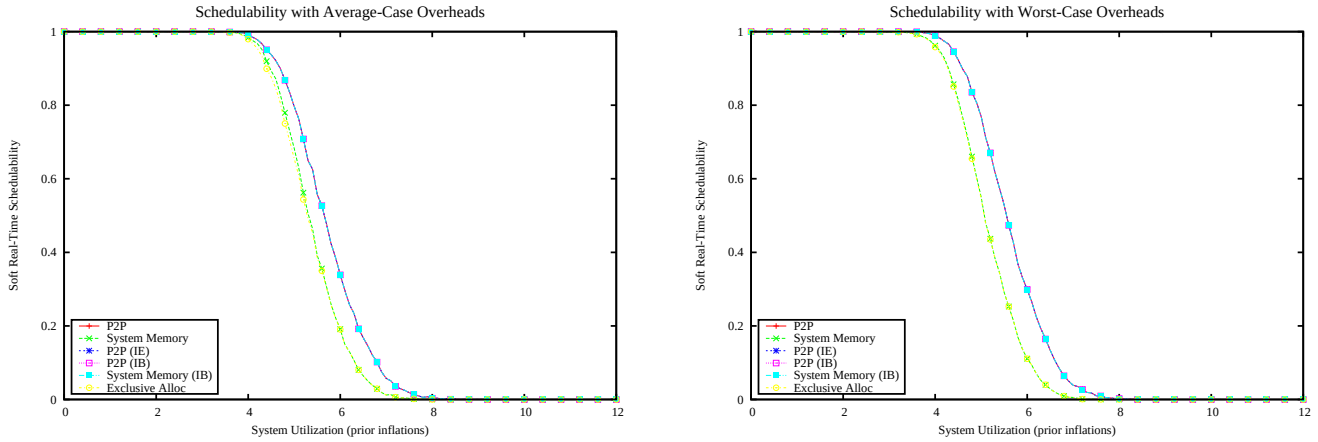

Figure 645: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

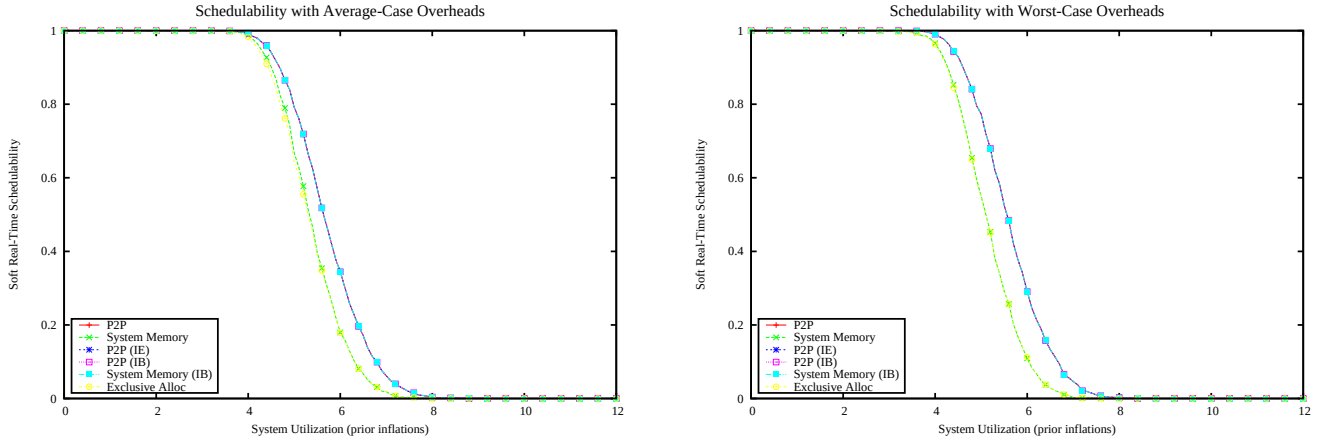

Figure 646: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

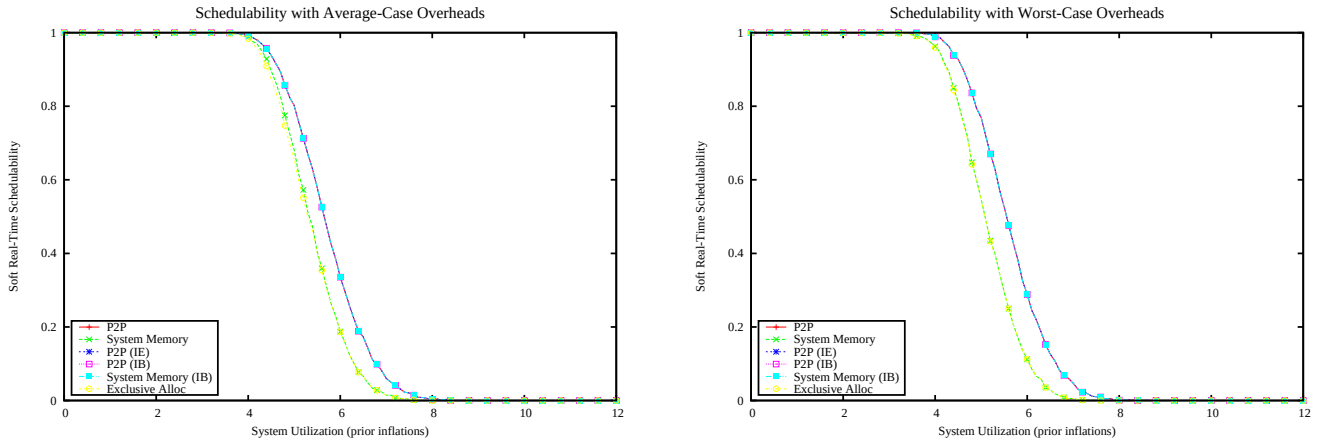

Figure 647: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

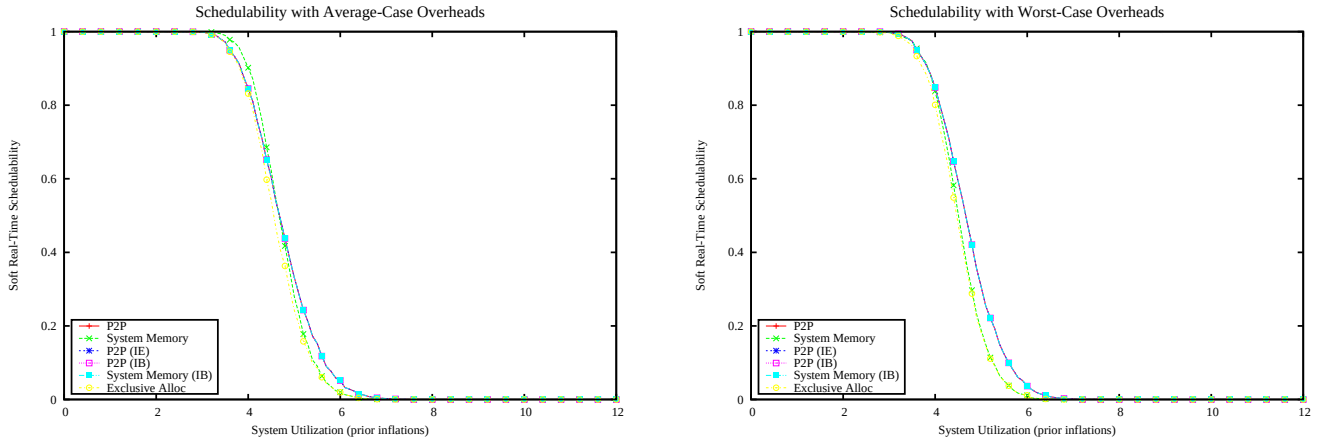

Figure 648: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

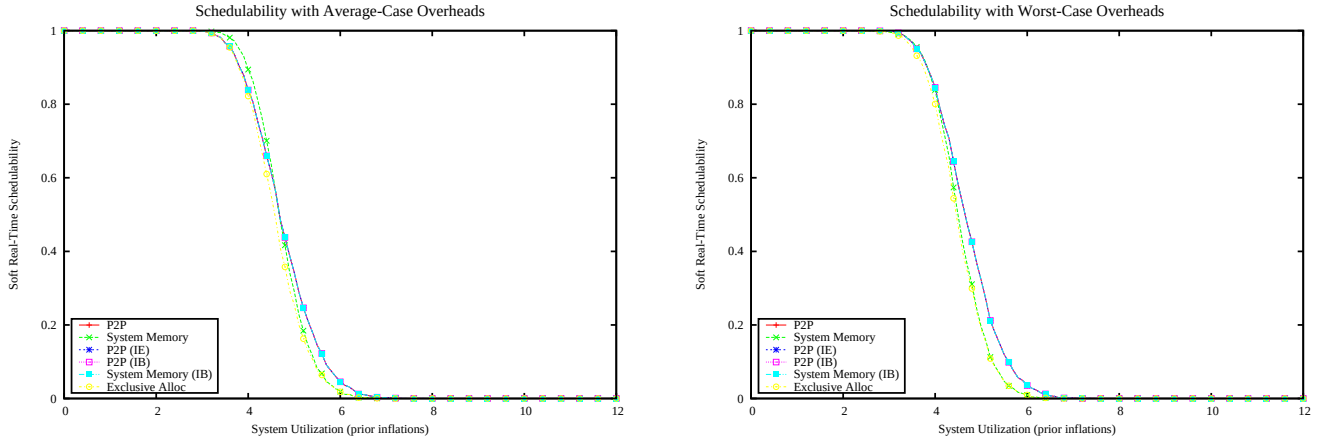

Figure 649: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

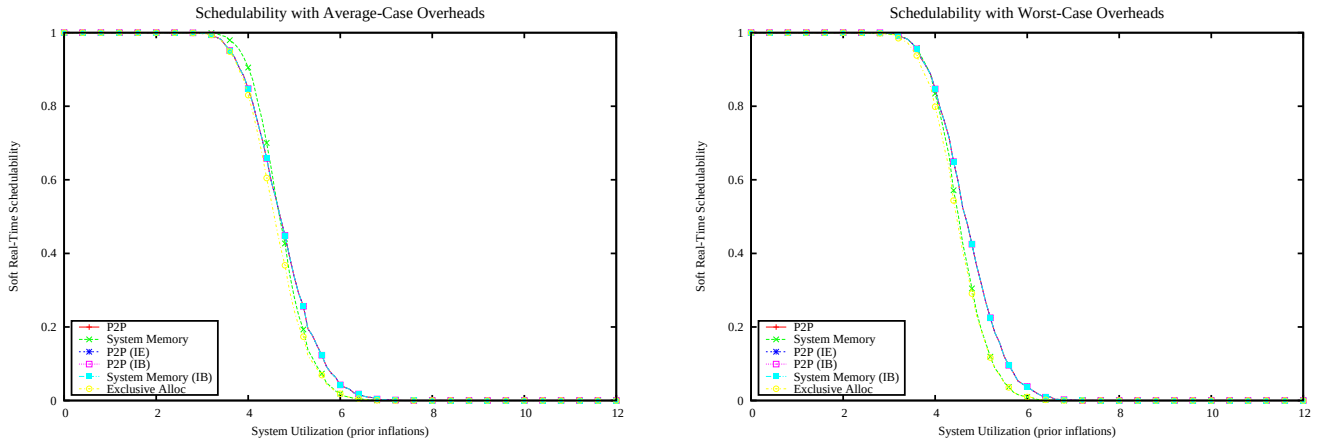

Figure 650: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

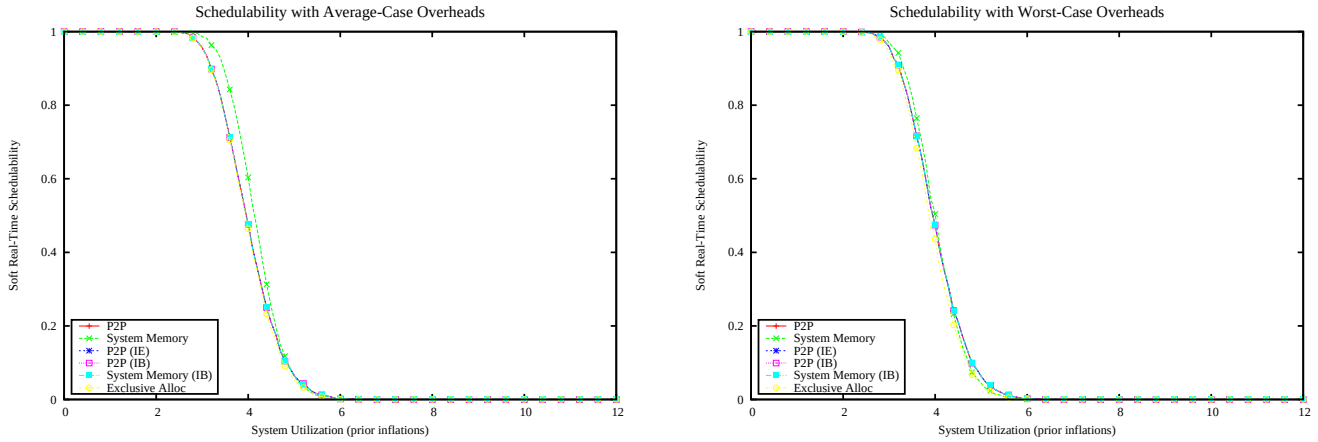

Figure 651: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

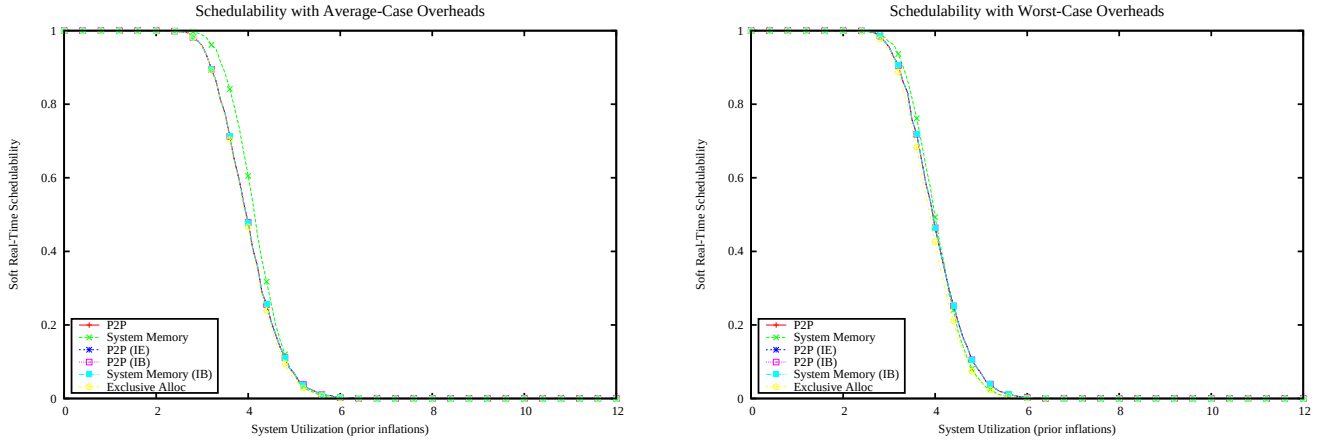

Figure 652: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

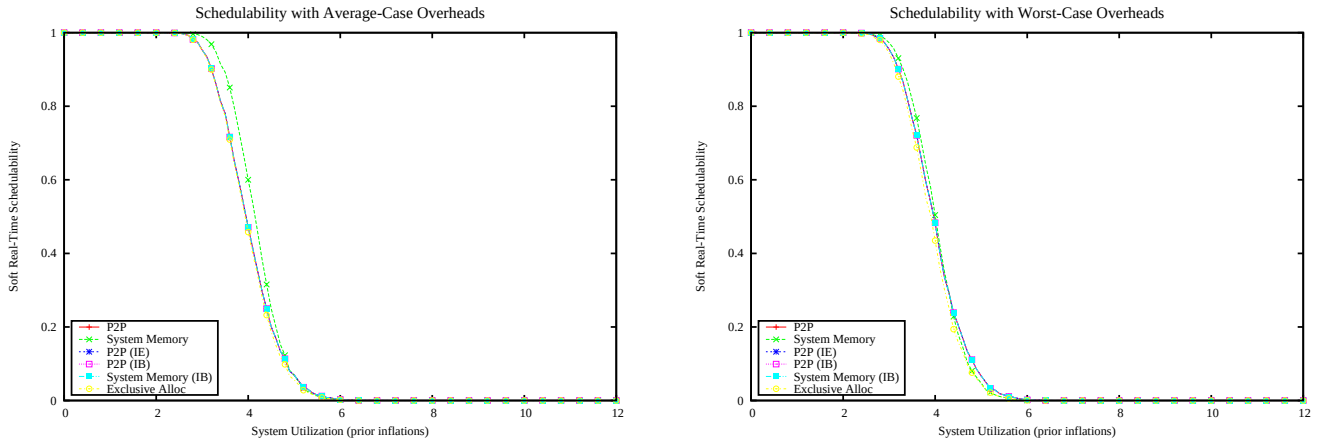

Figure 653: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

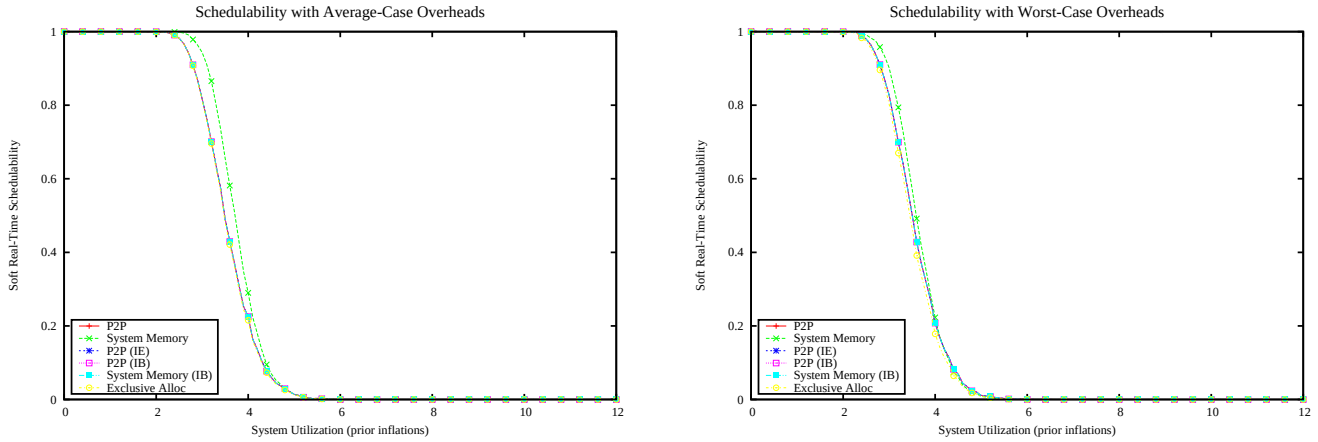

Figure 654: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

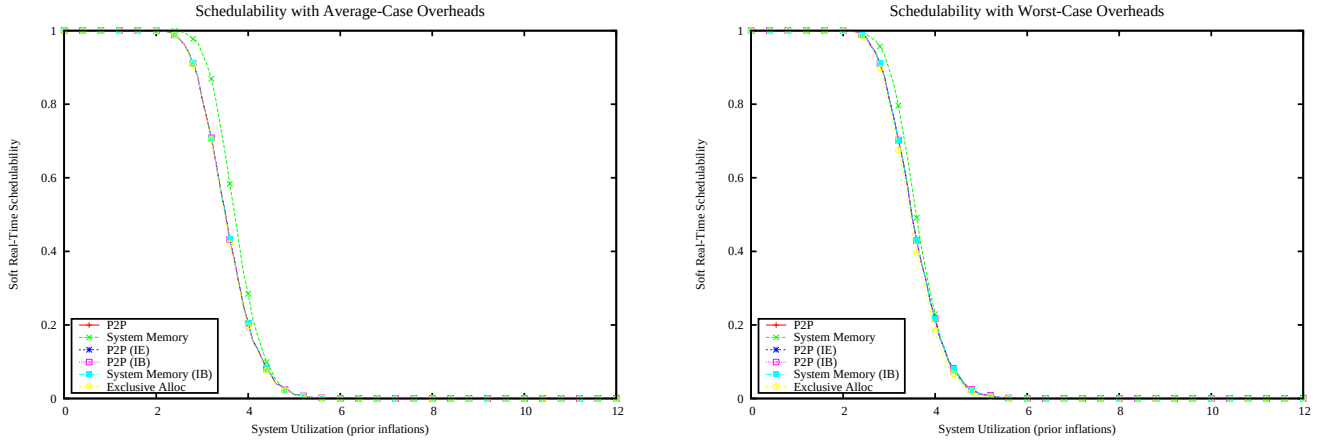

Figure 655: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

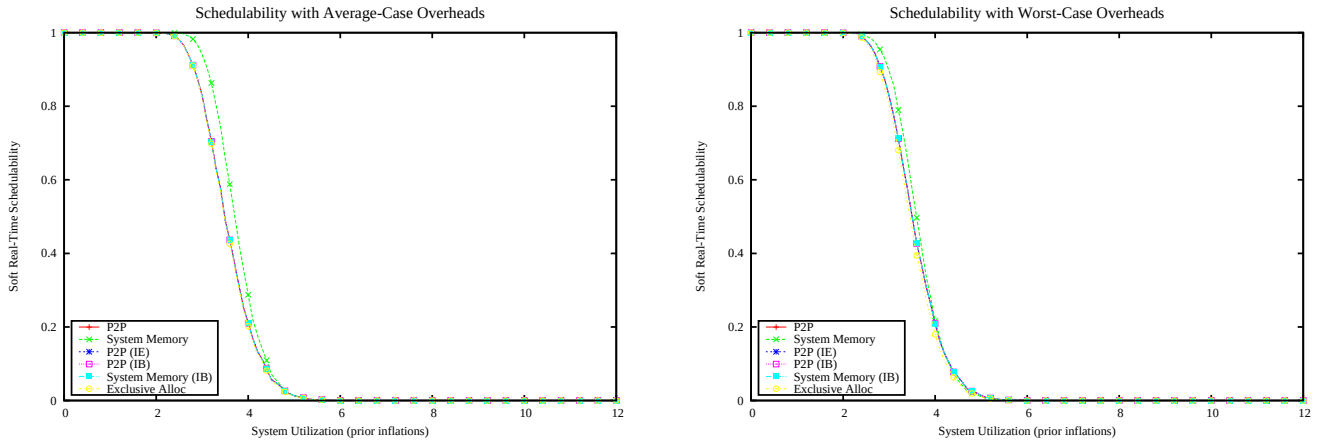

Figure 656: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

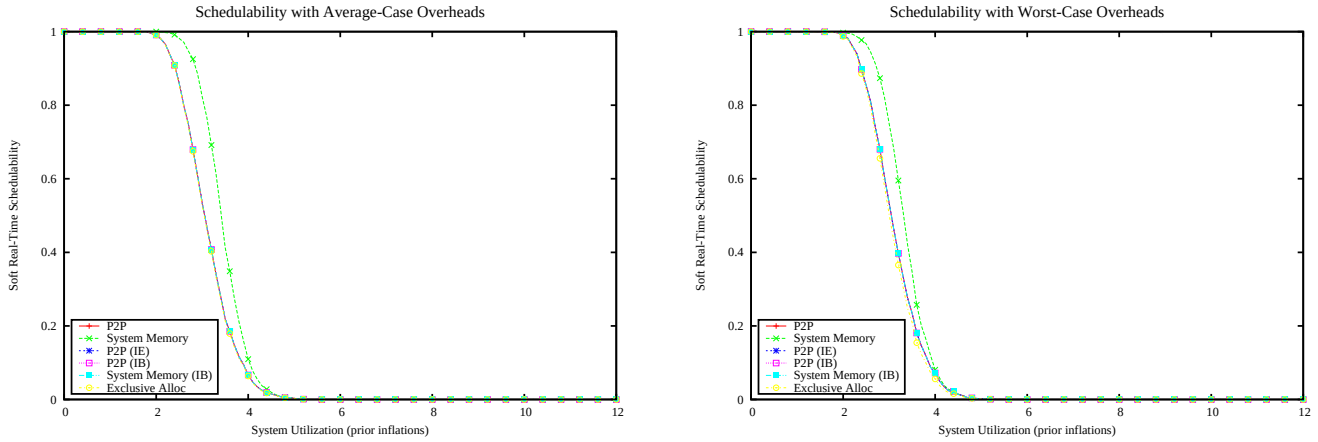

Figure 657: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

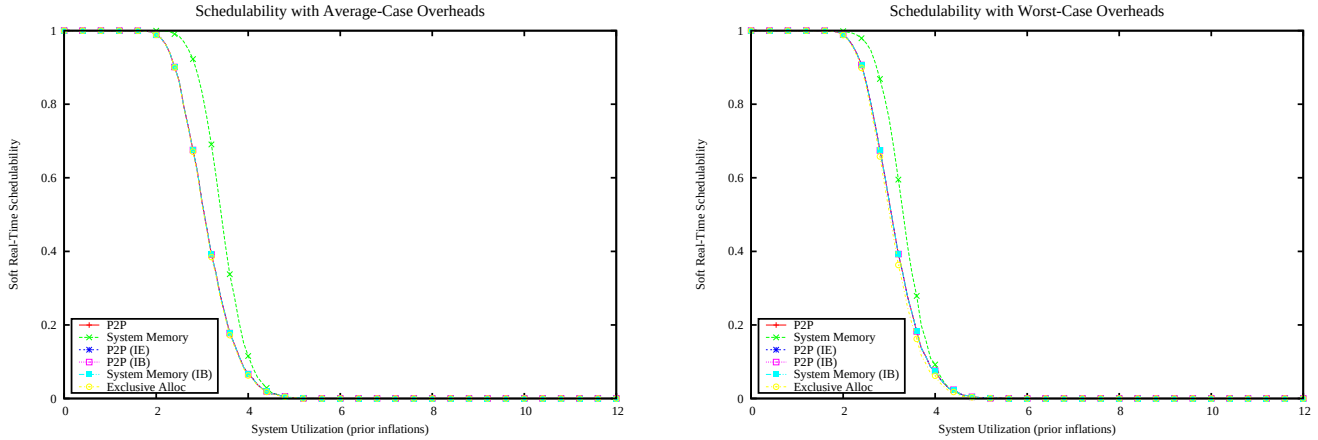

Figure 658: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

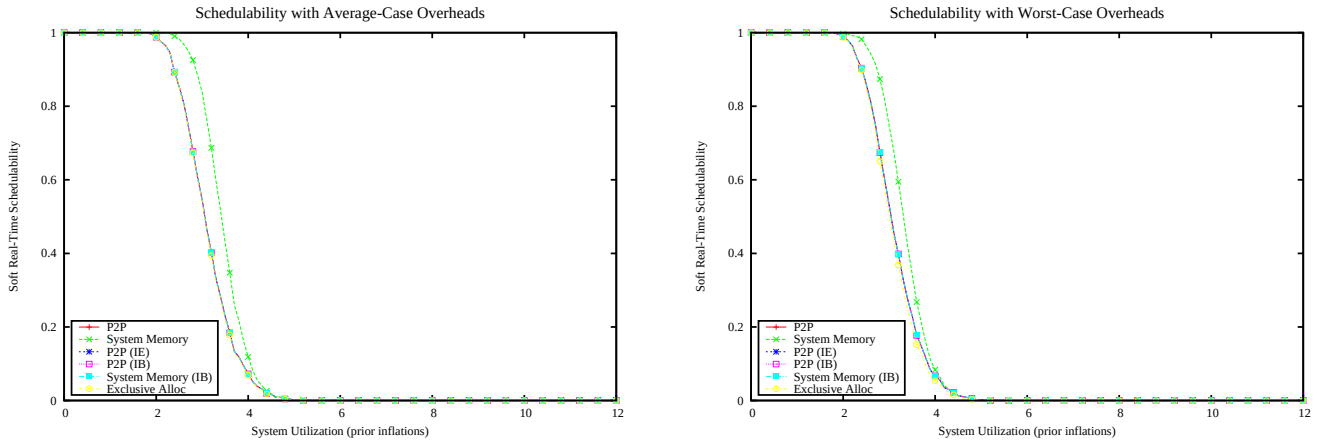

Figure 659: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

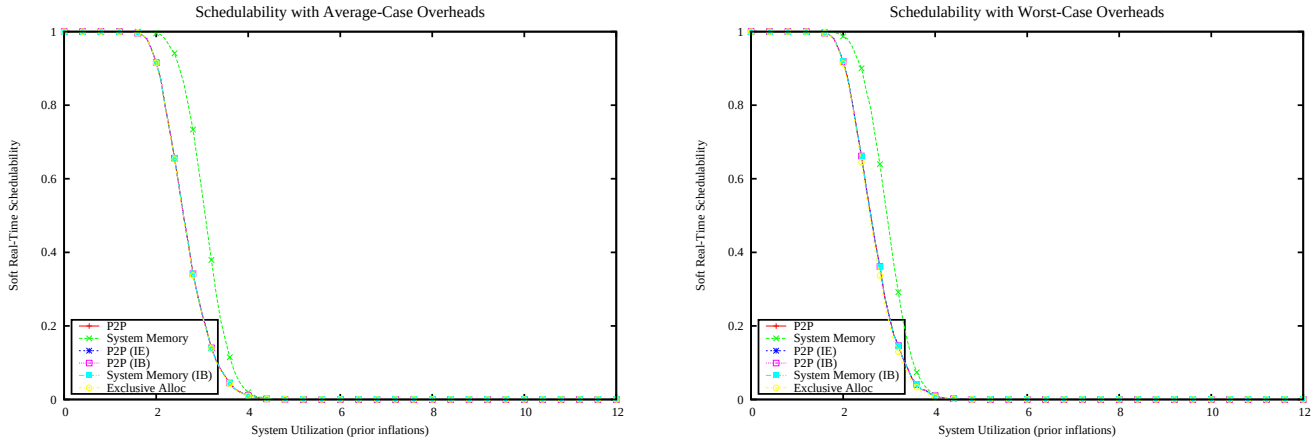

Figure 660: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

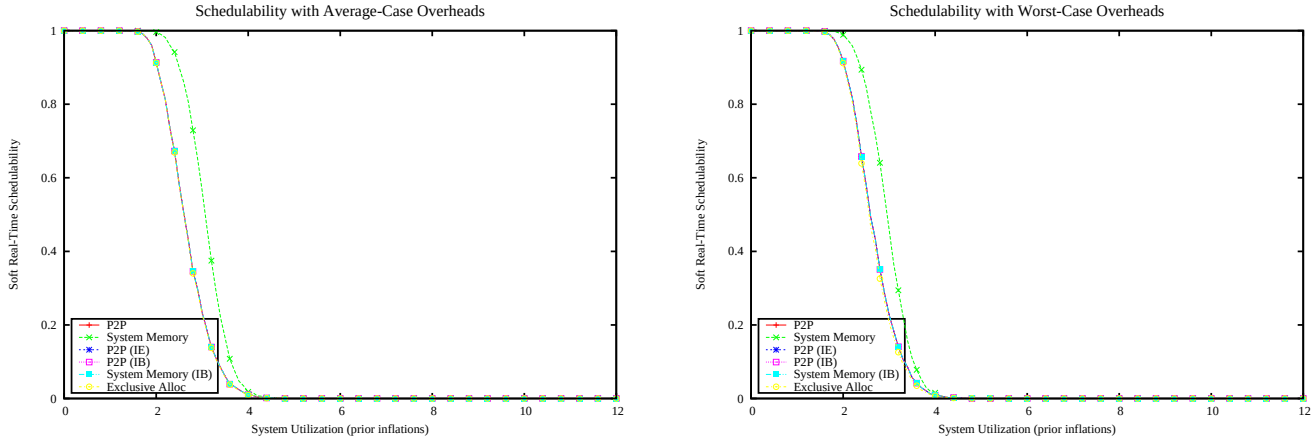

Figure 661: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

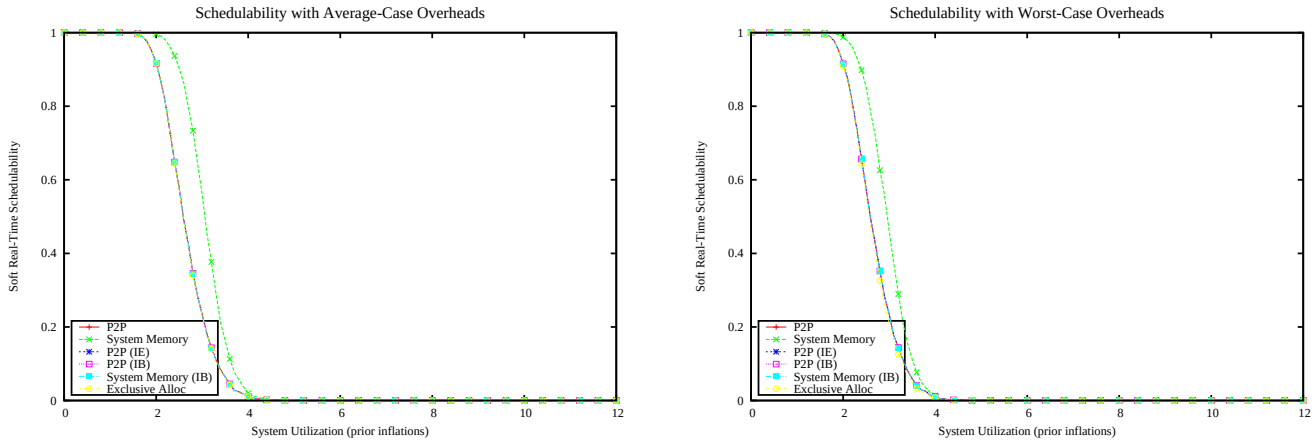

Figure 662: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

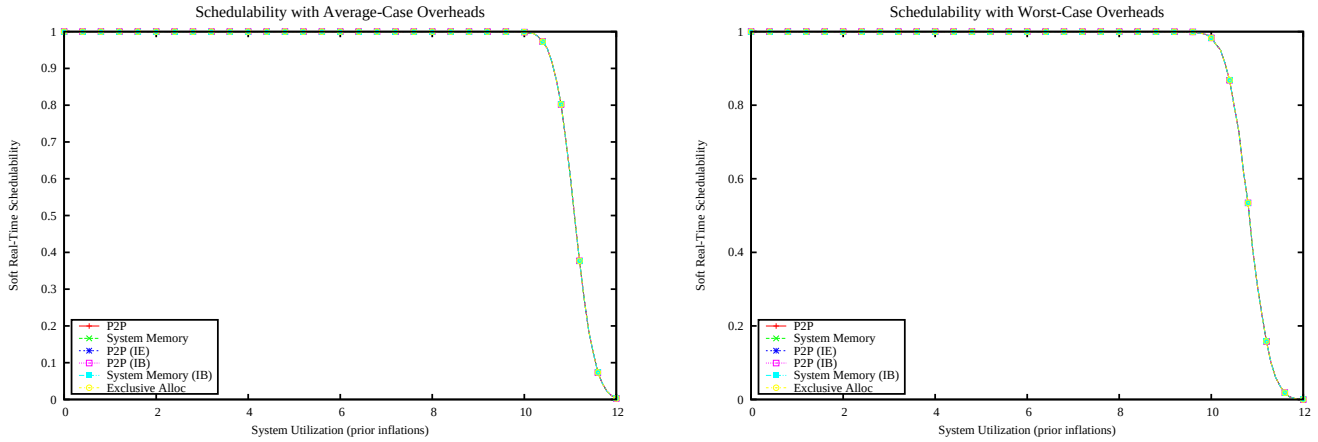

Figure 663: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

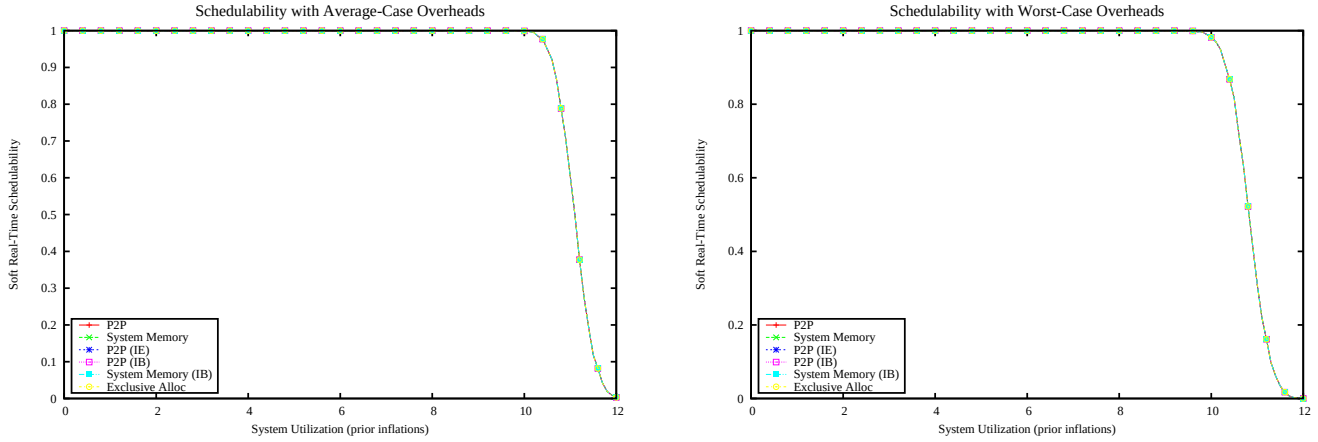

Figure 664: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

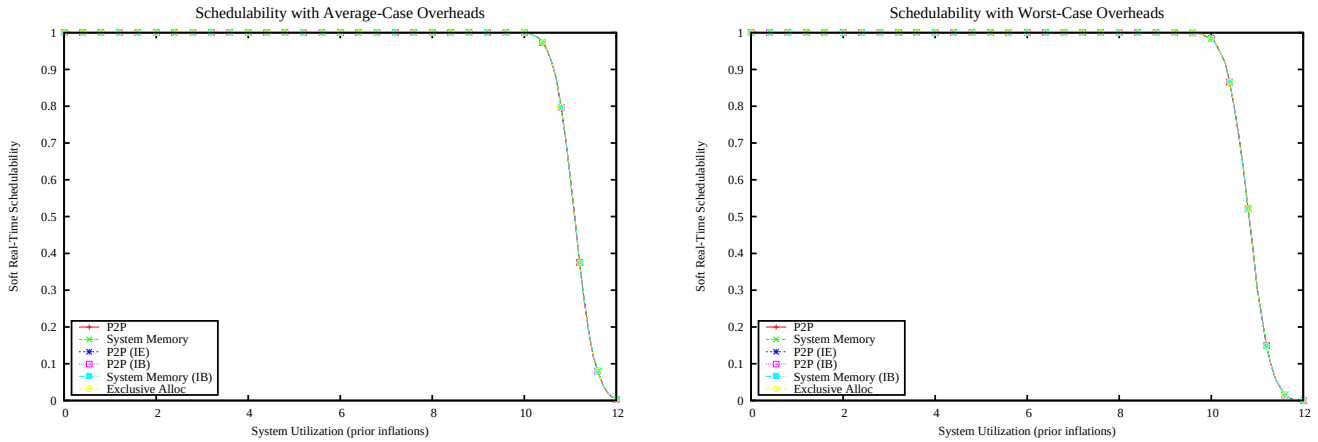

Figure 665: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

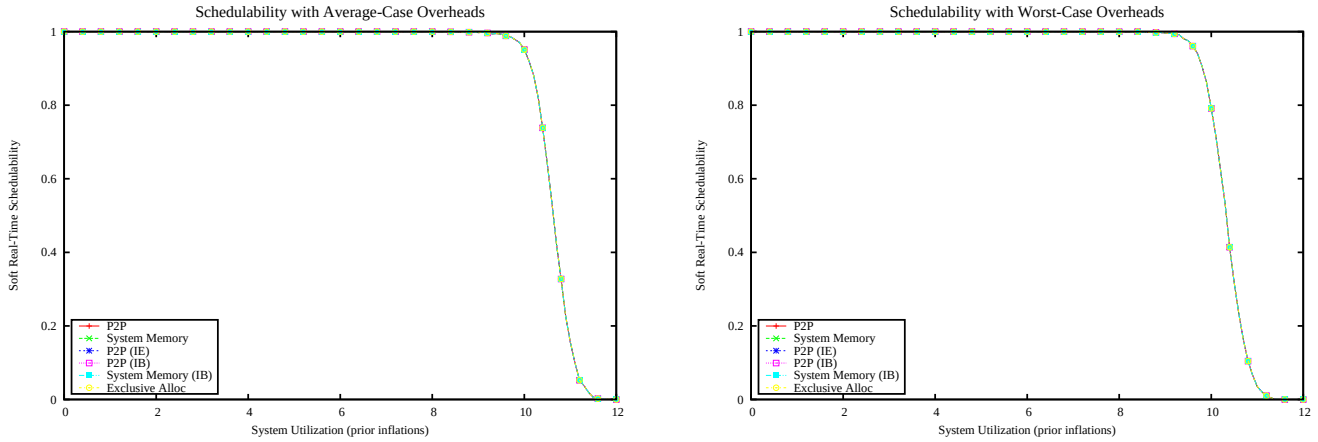

Figure 666: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

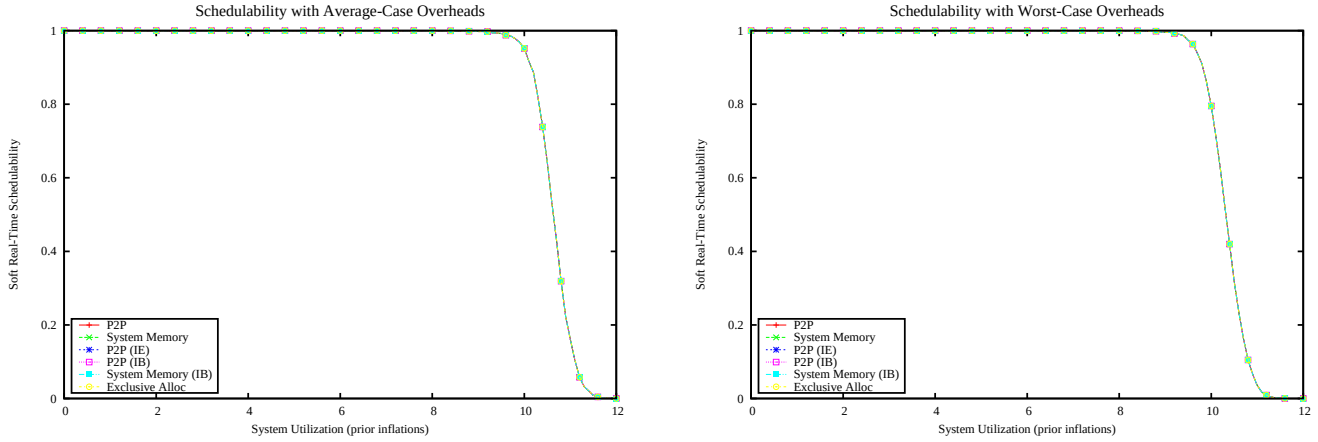

Figure 667: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

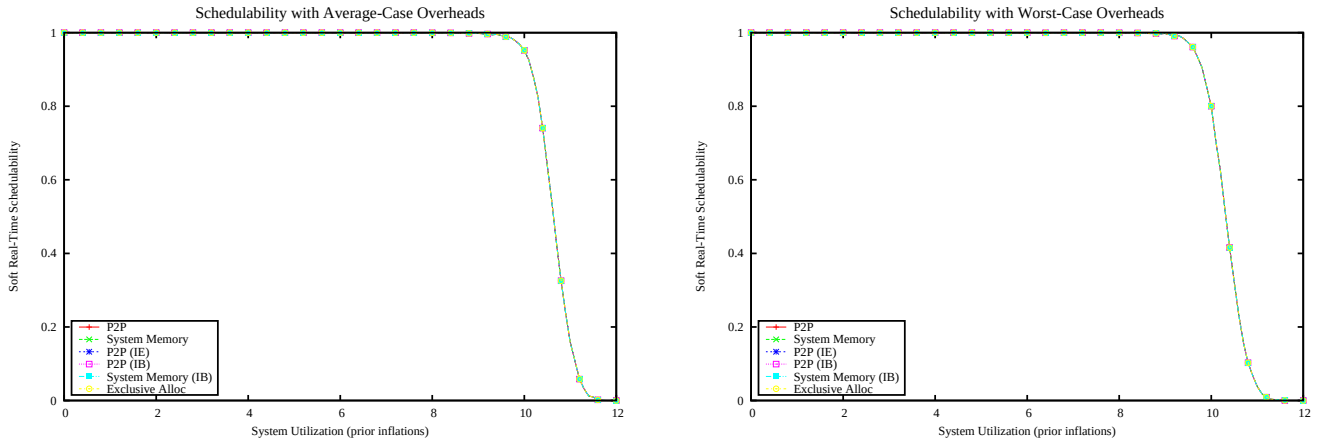

Figure 668: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

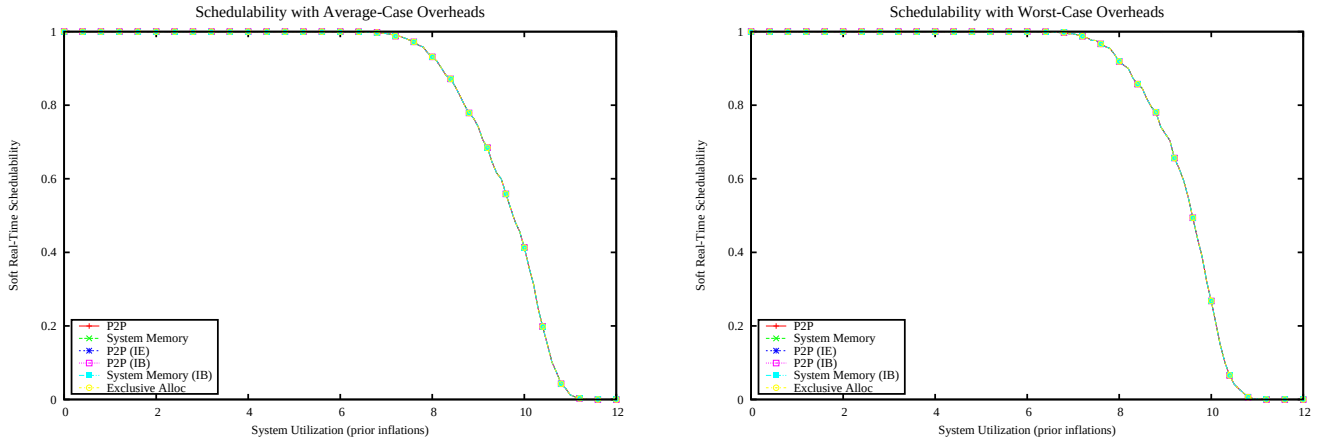

Figure 669: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

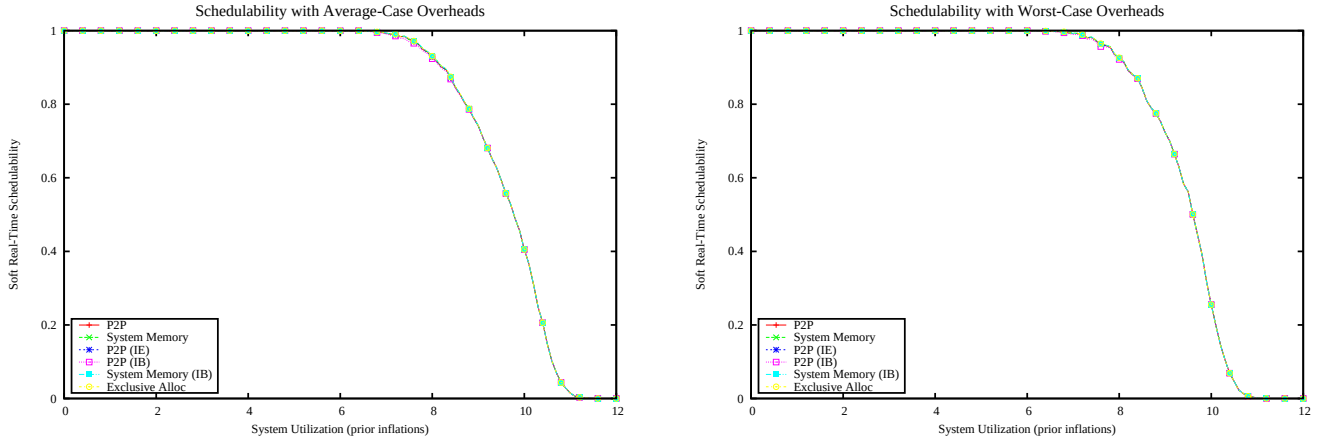

Figure 670: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

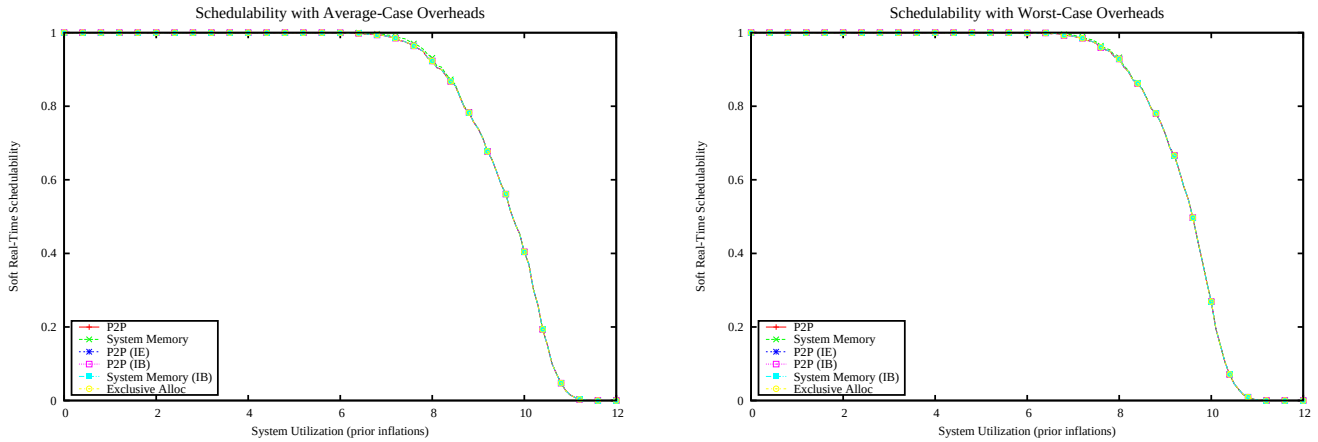

Figure 671: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

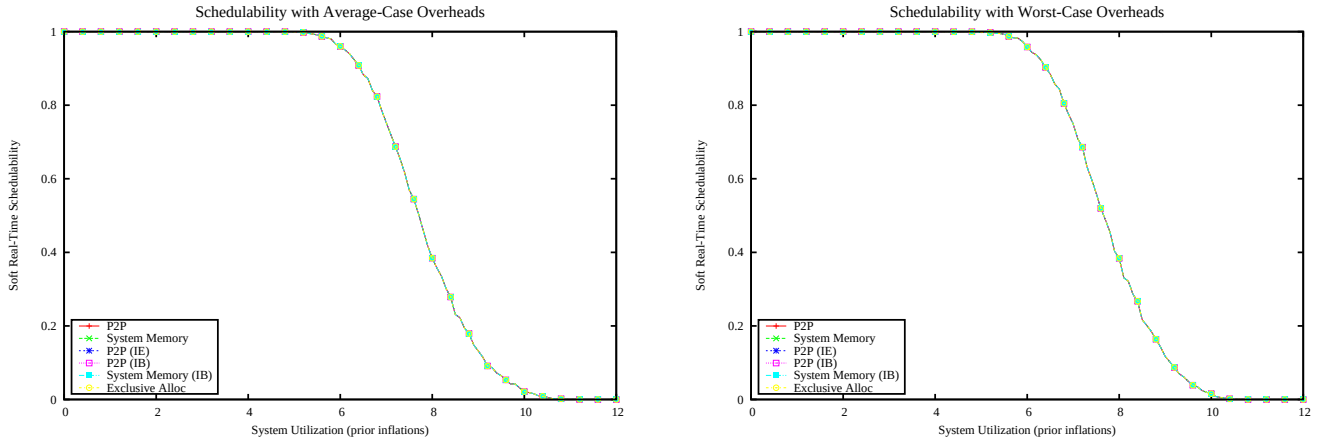

Figure 672: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

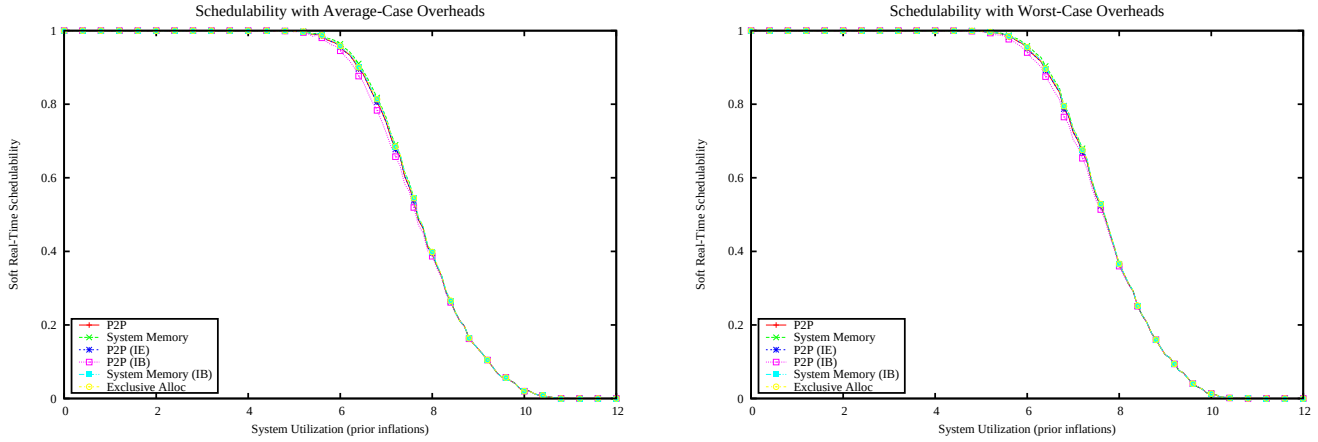

Figure 673: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

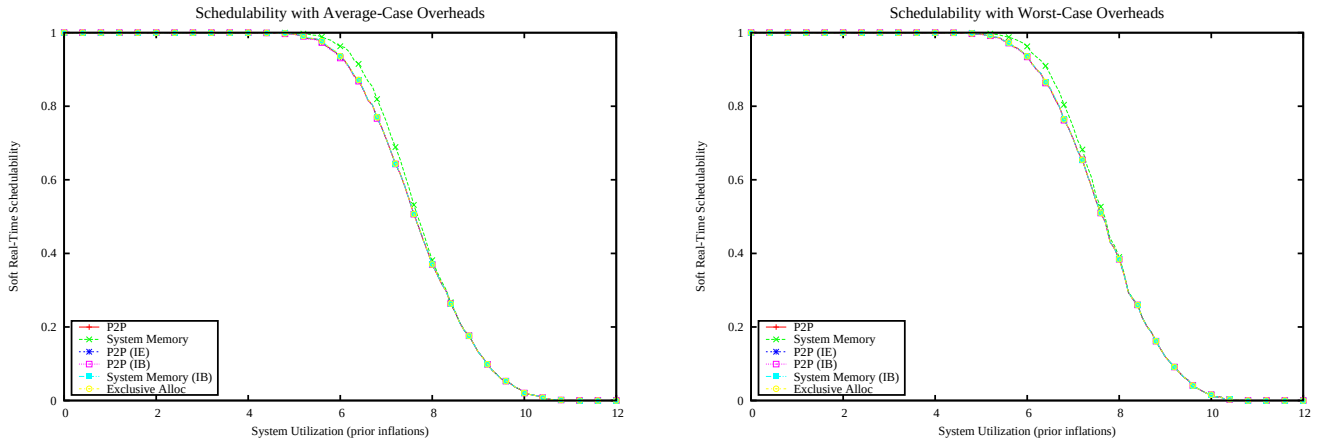

Figure 674: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

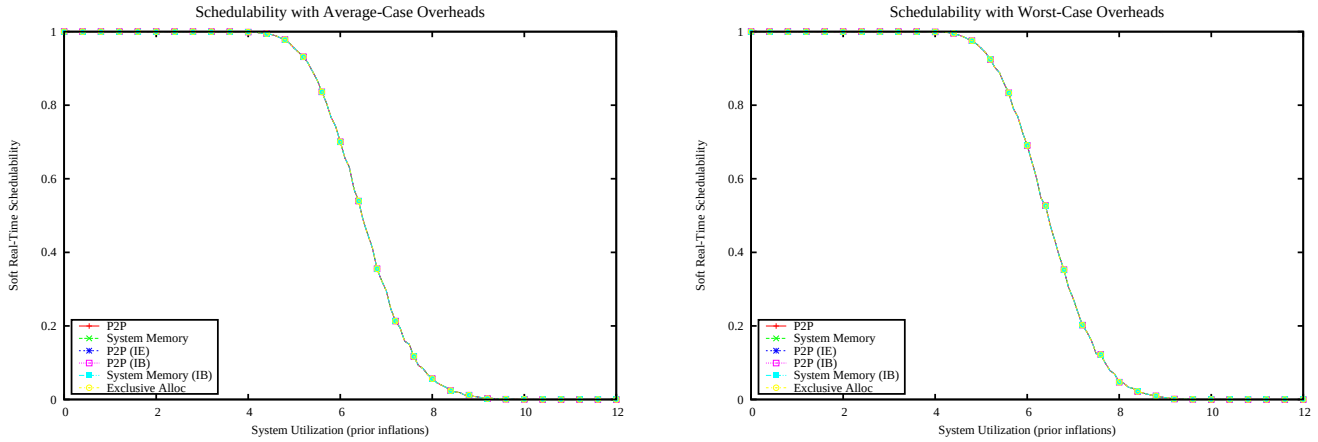

Figure 675: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

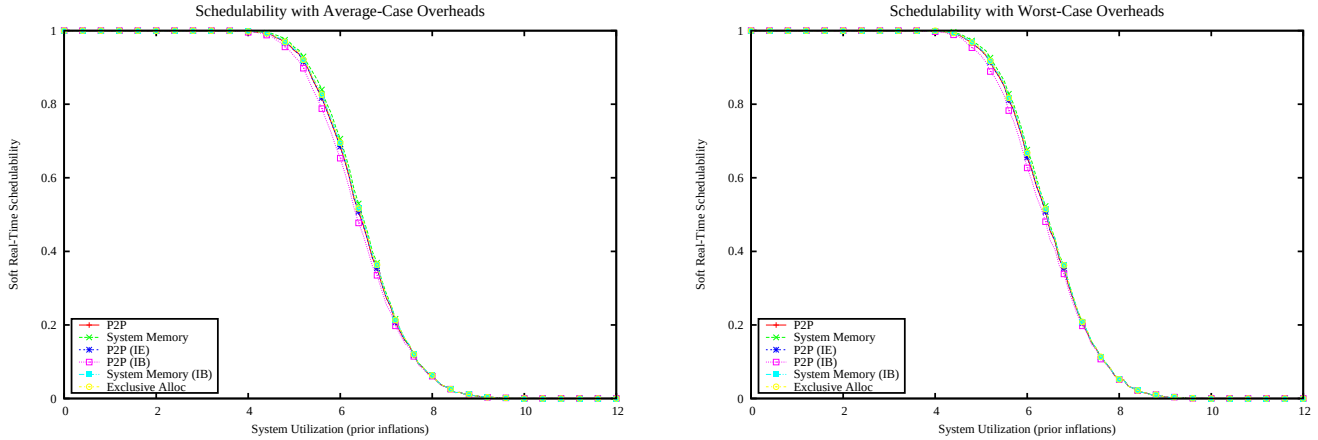

Figure 676: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

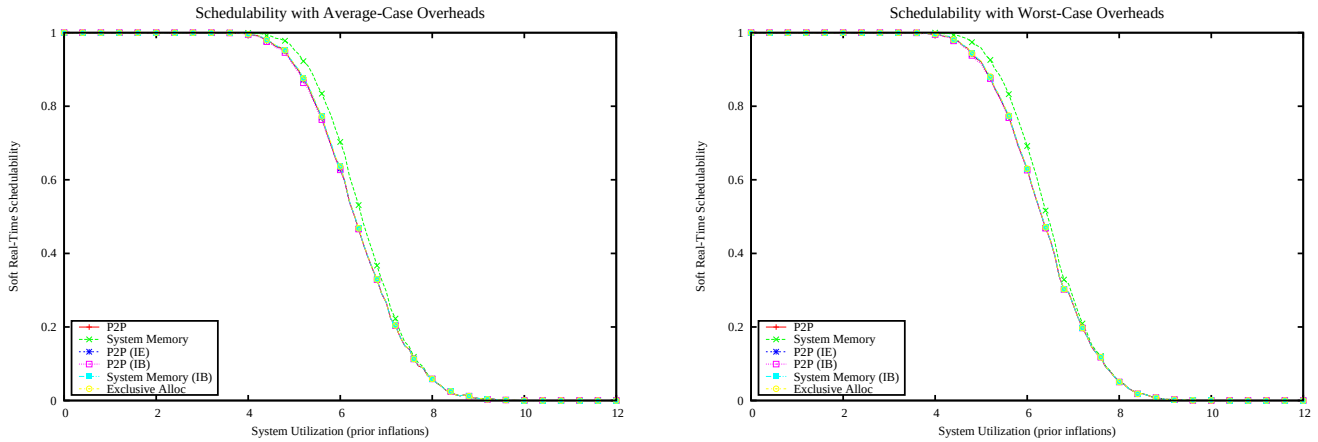

Figure 677: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

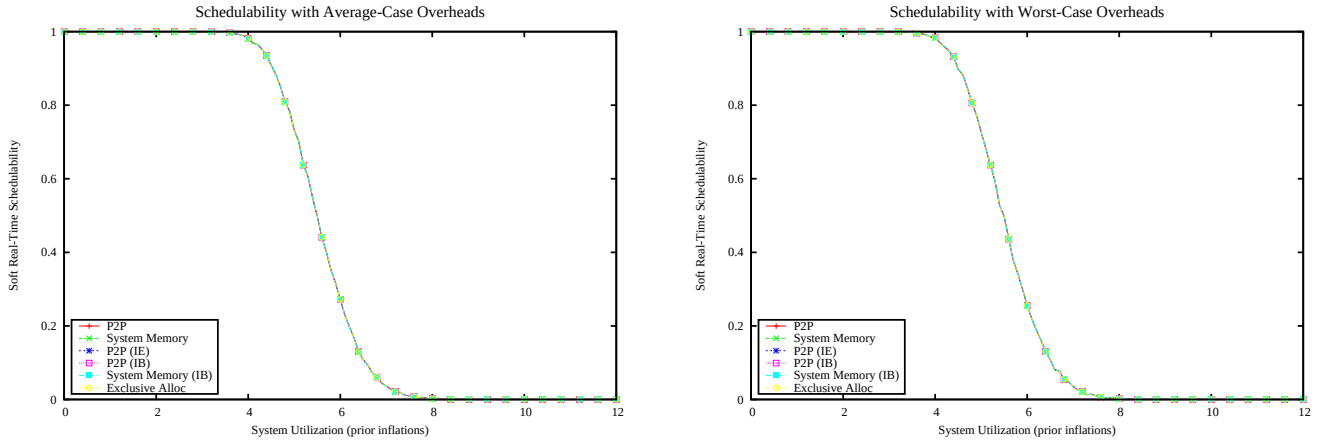

Figure 678: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

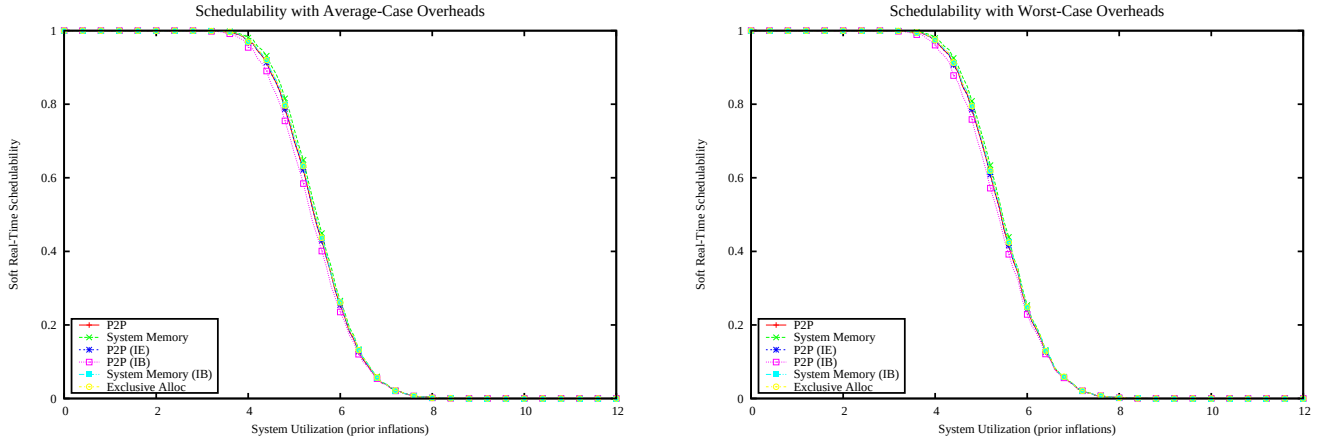

Figure 679: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

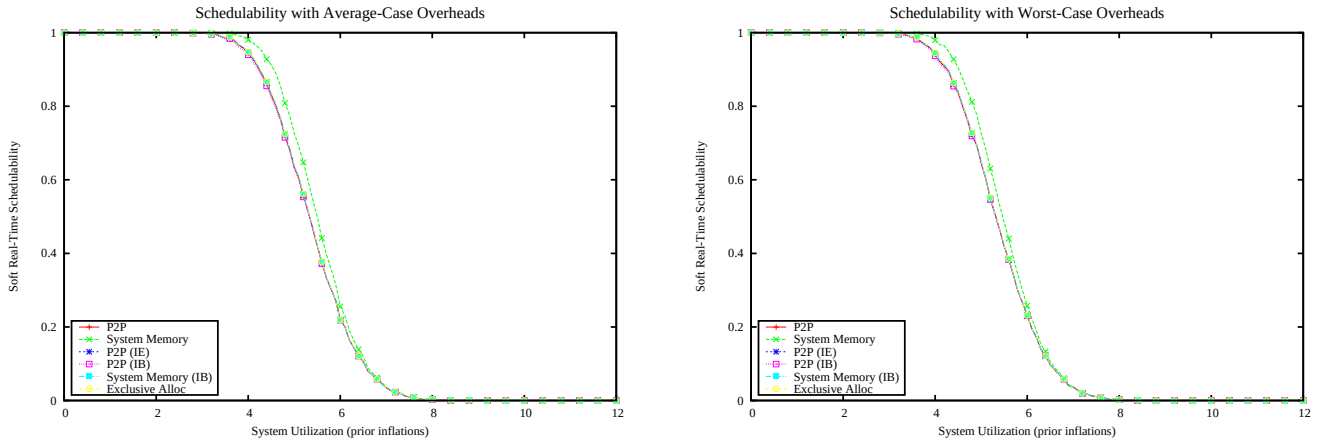

Figure 680: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

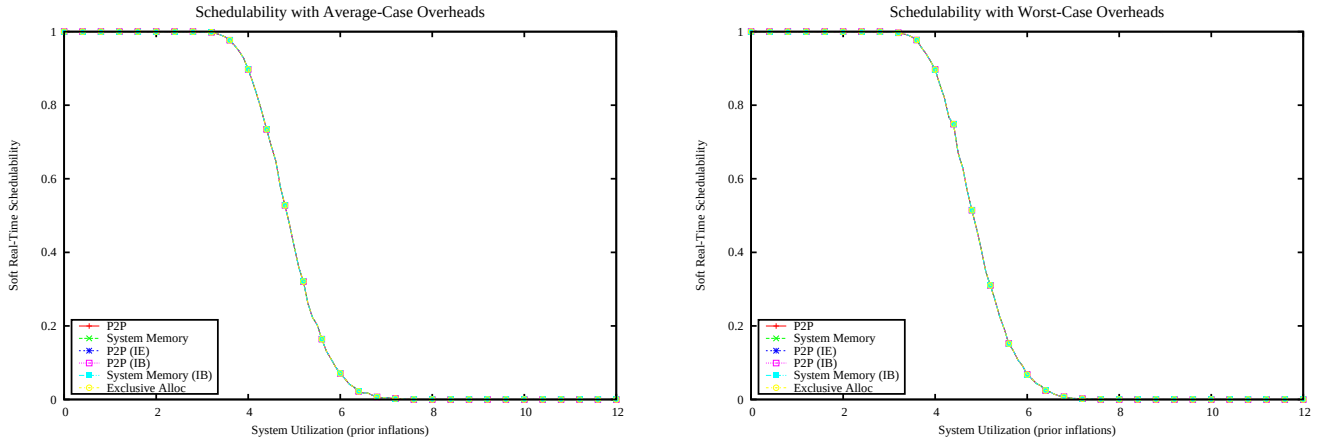

Figure 681: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

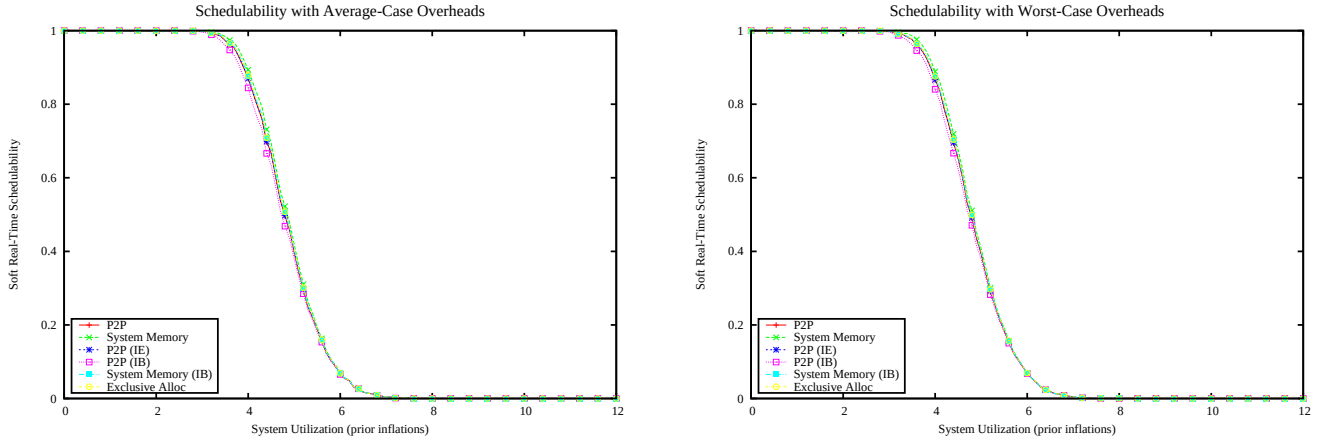

Figure 682: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

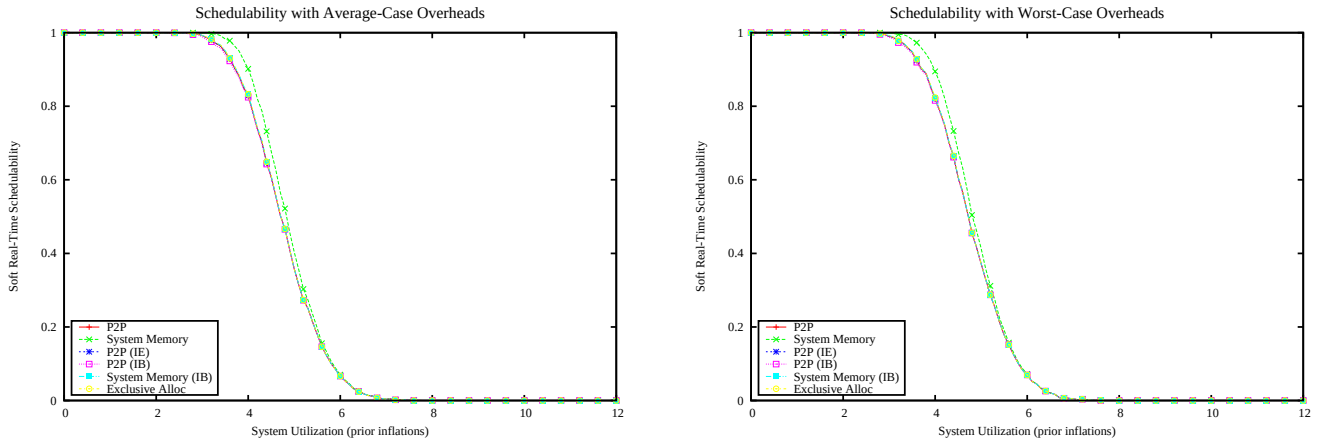

Figure 683: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

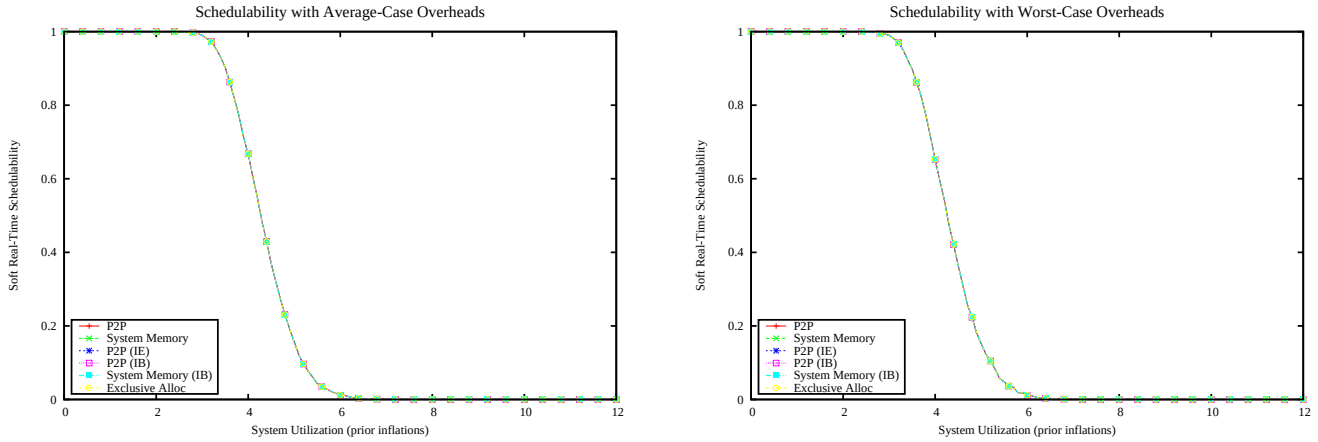

Figure 684: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

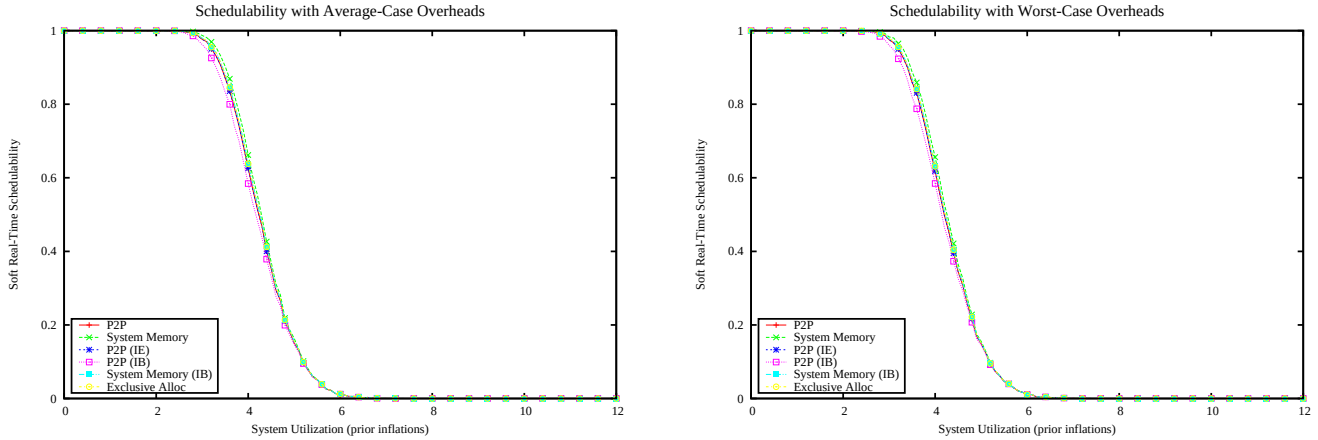

Figure 685: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

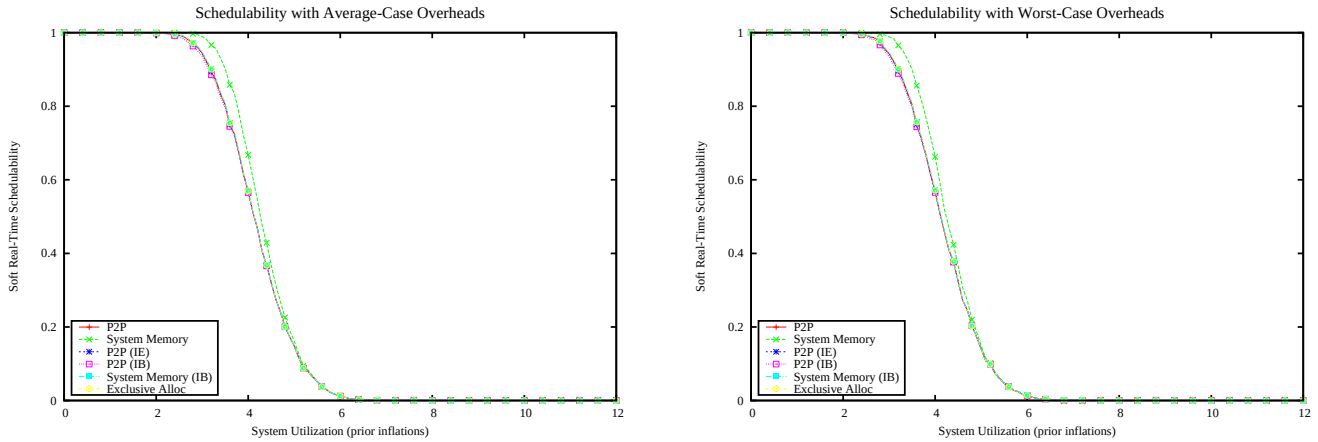

Figure 686: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

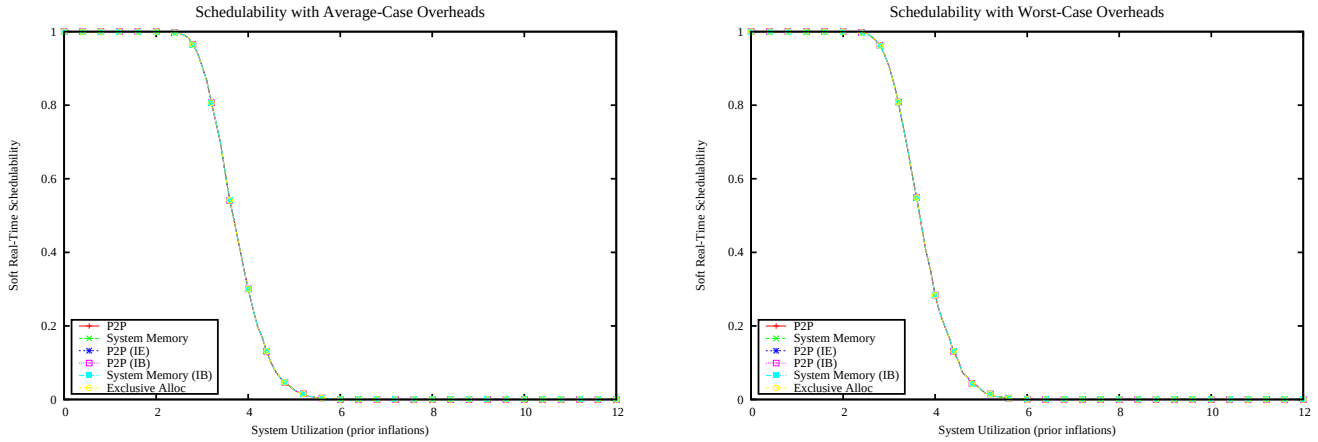

Figure 687: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

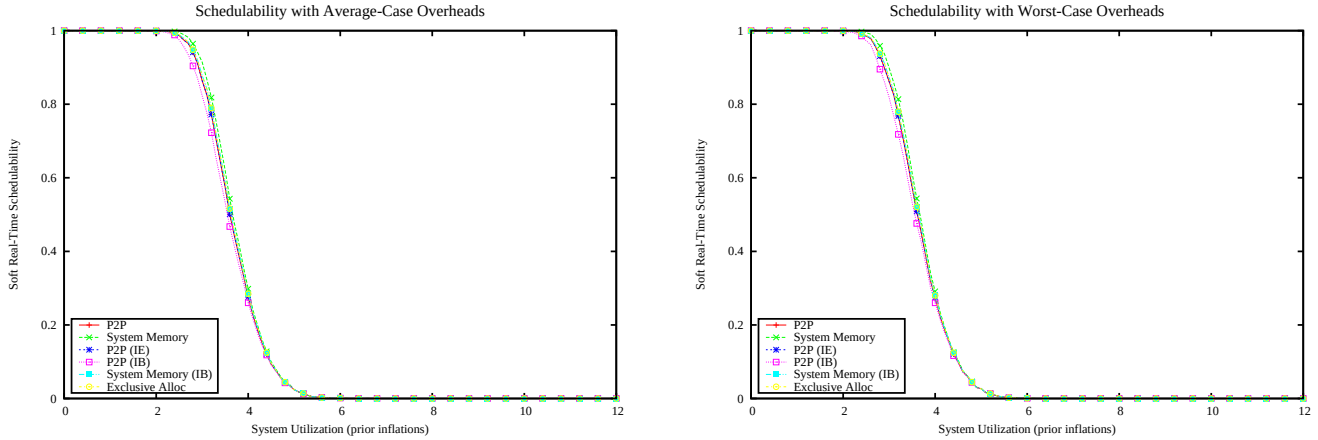

Figure 688: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

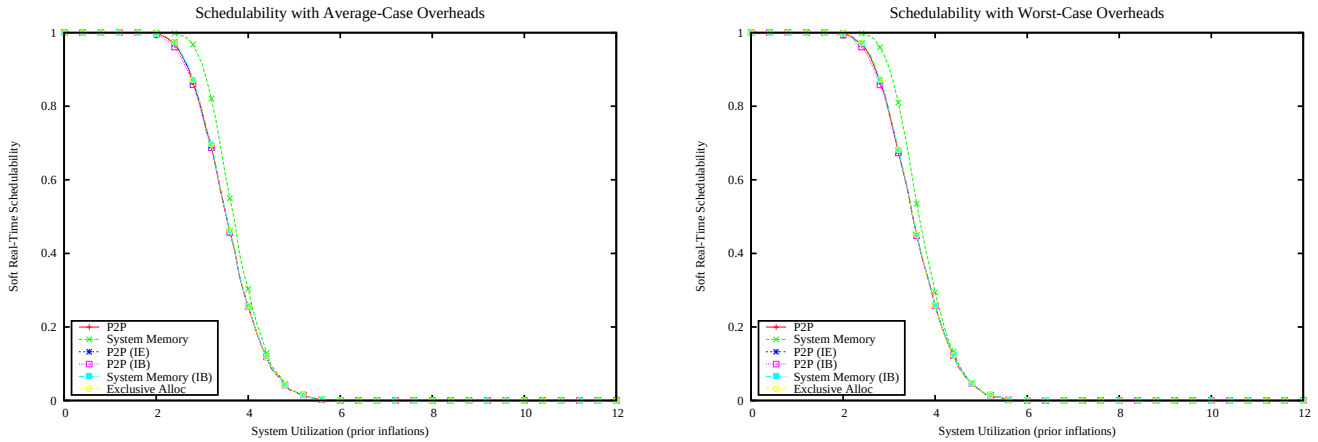

Figure 689: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

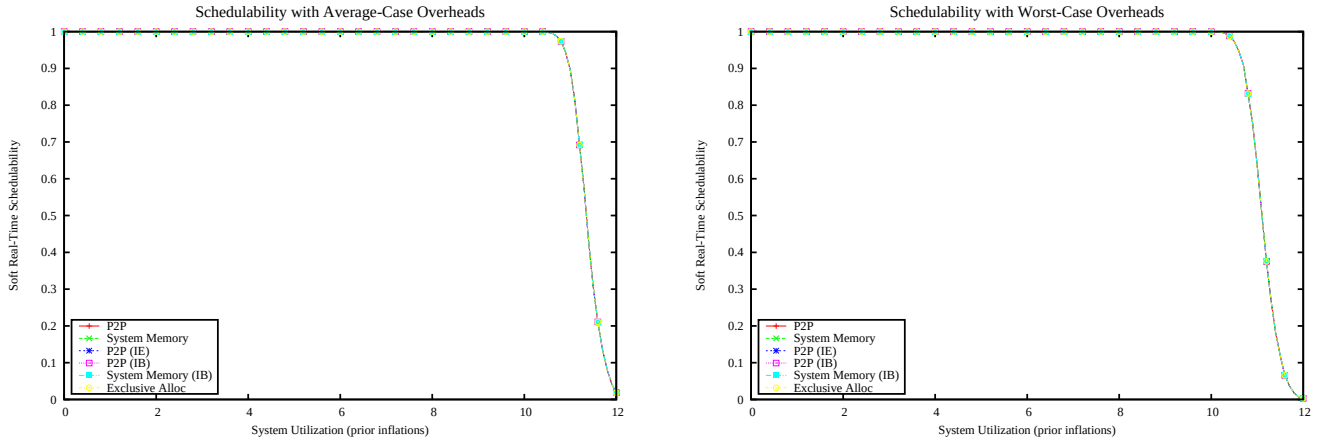

Figure 690: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

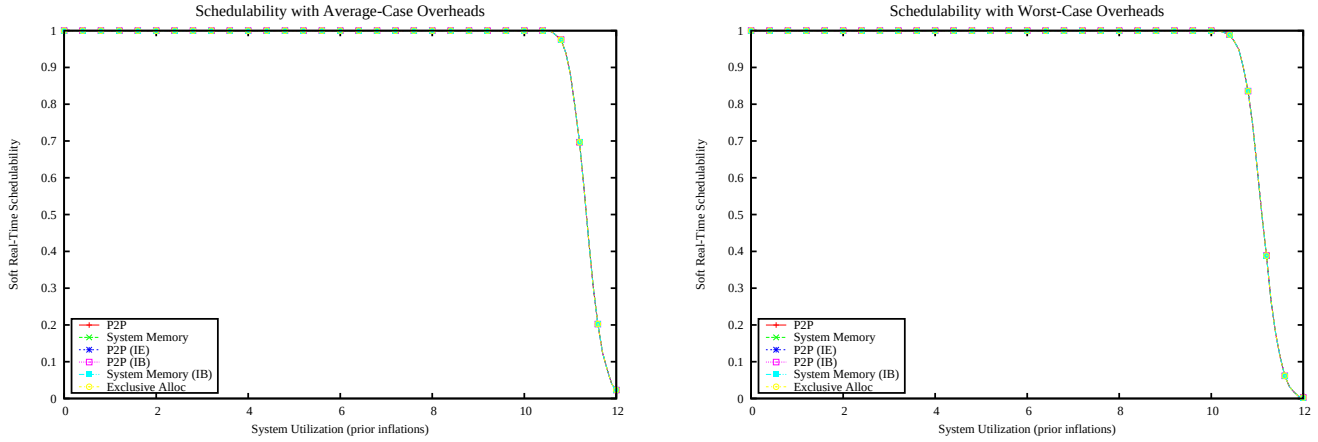

Figure 691: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

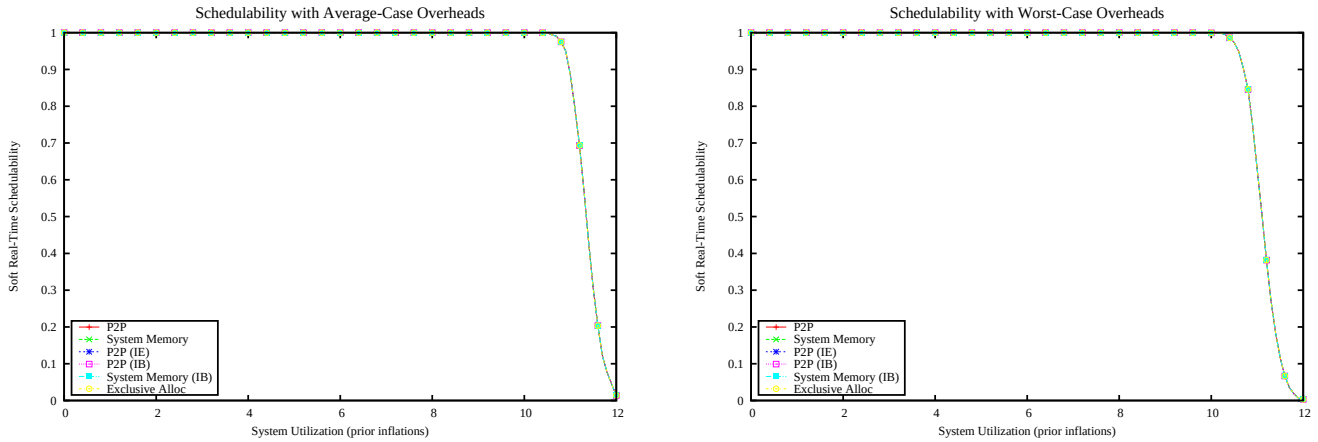

Figure 692: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

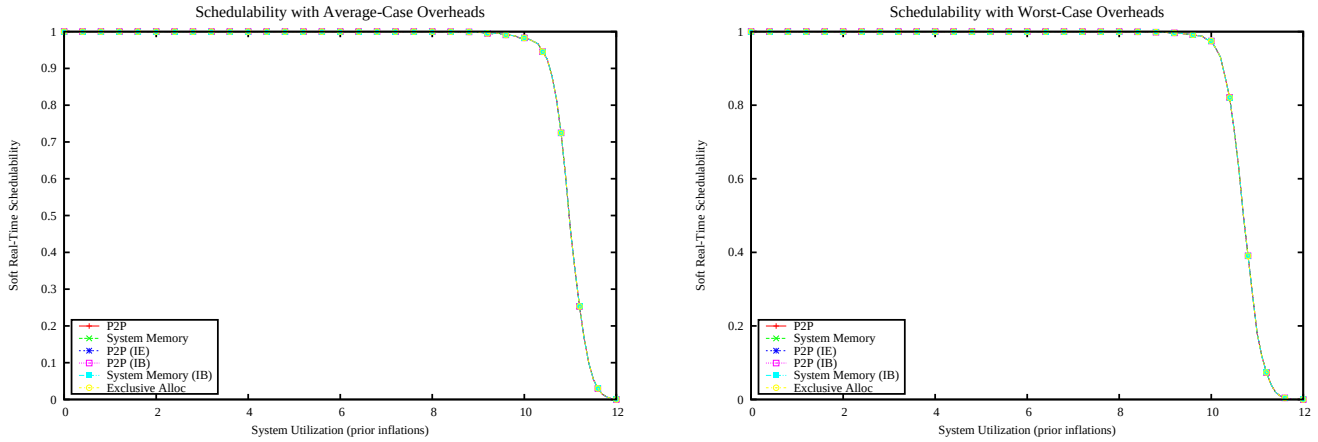

Figure 693: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

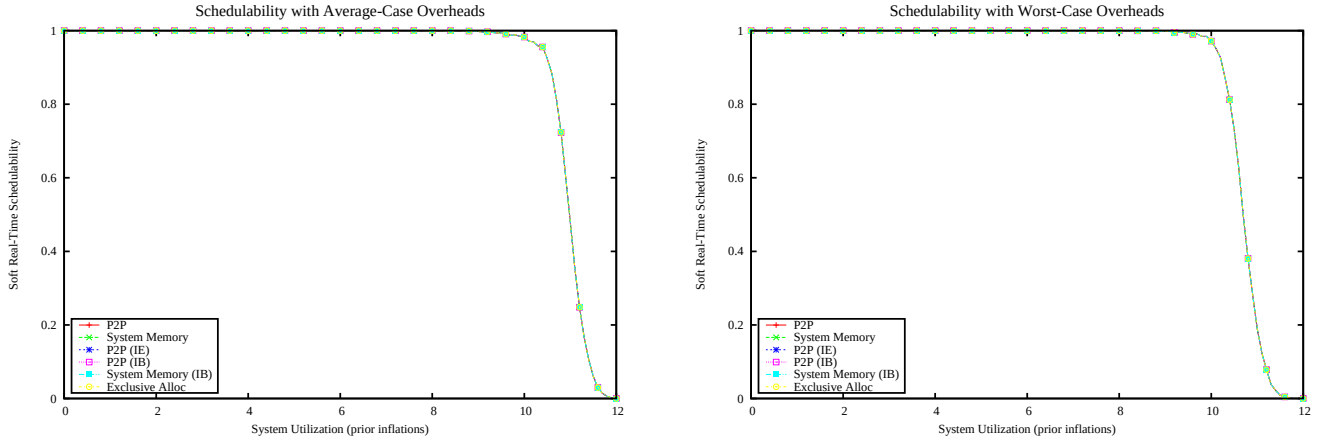

Figure 694: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

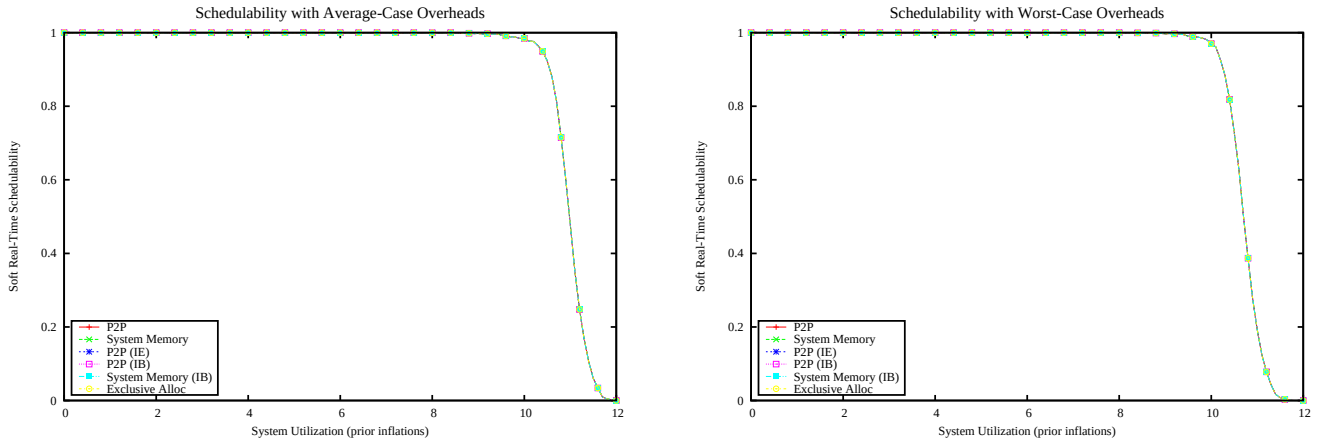

Figure 695: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

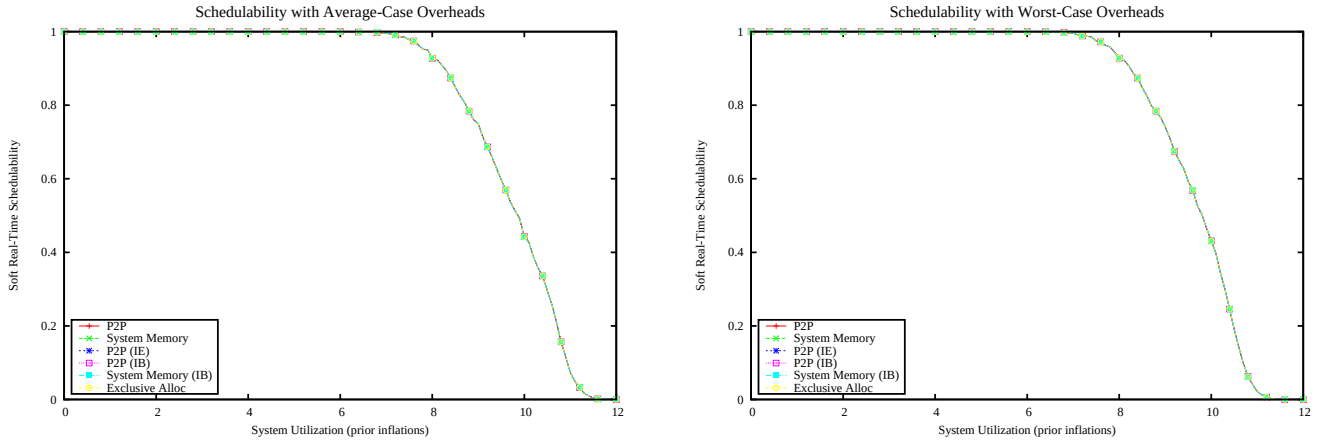

Figure 696: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

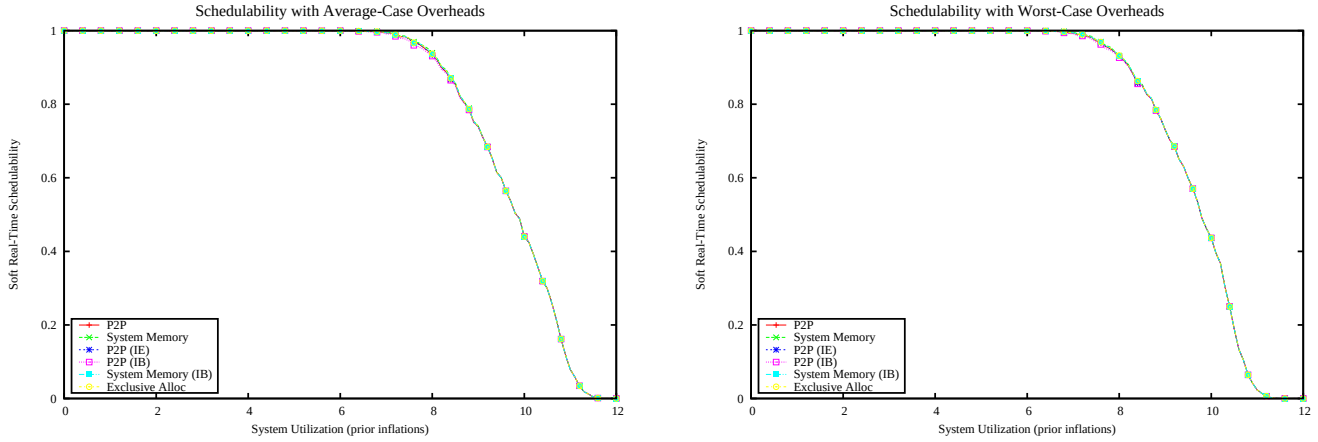

Figure 697: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

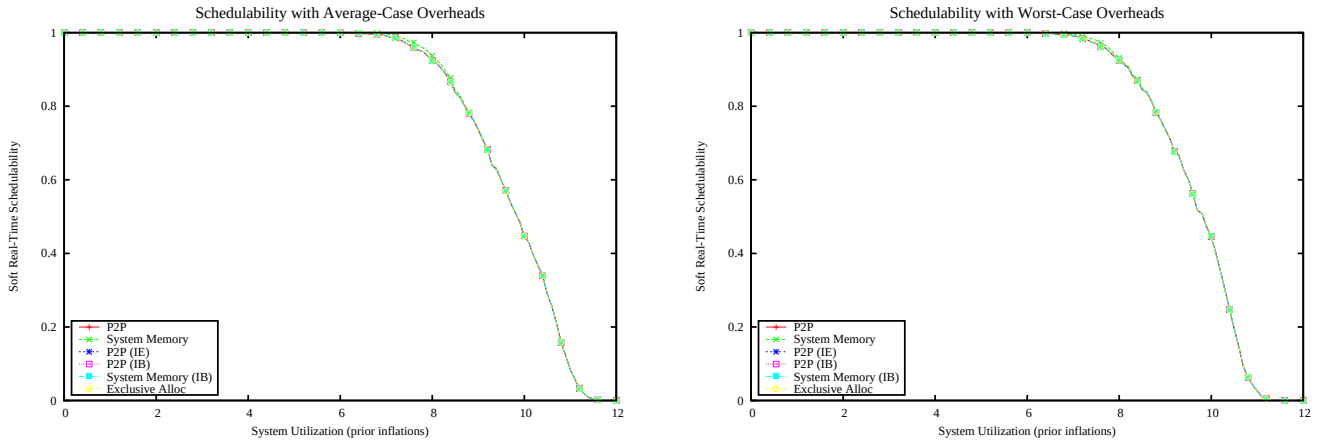

Figure 698: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

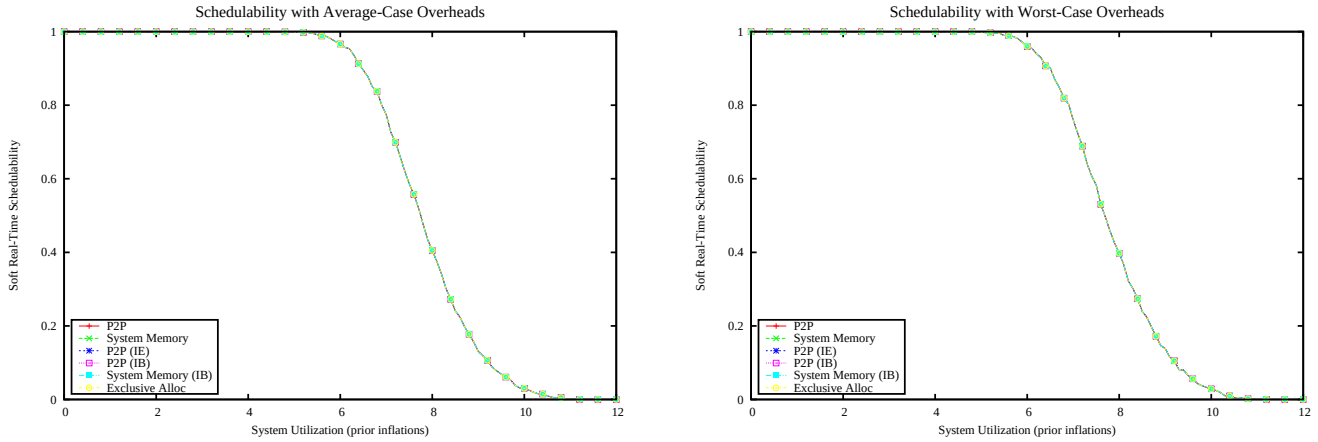

Figure 699: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

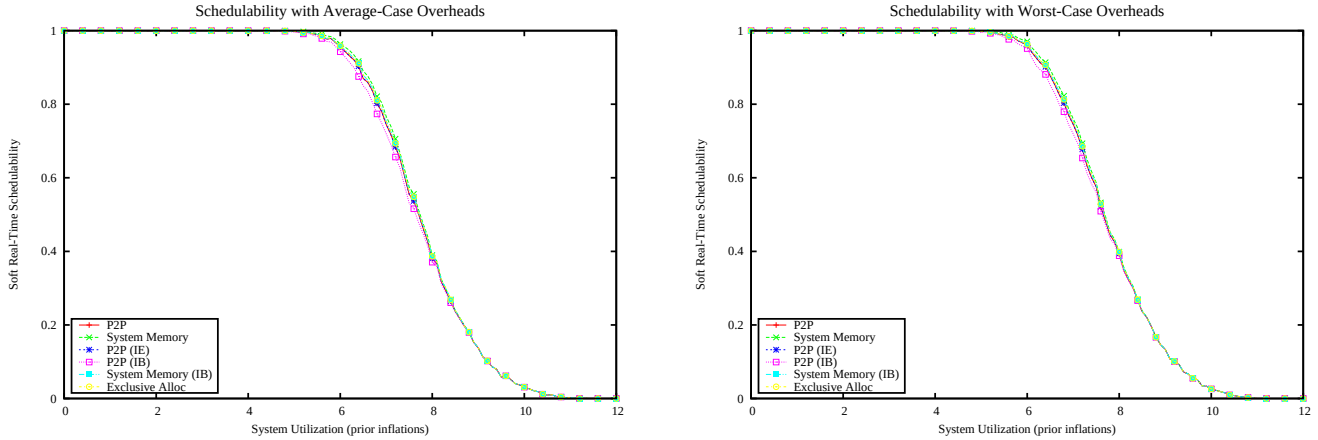

Figure 700: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

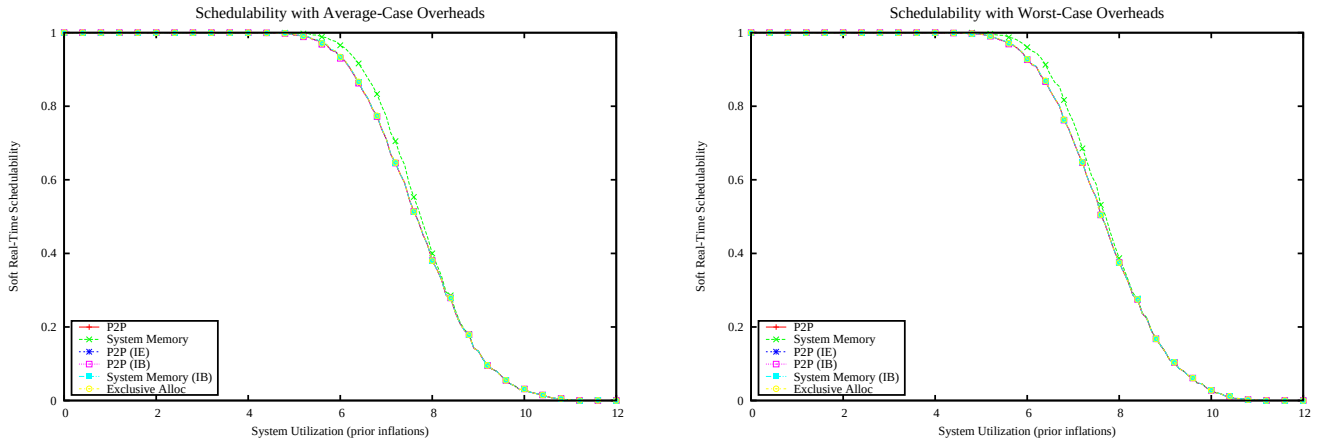

Figure 701: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

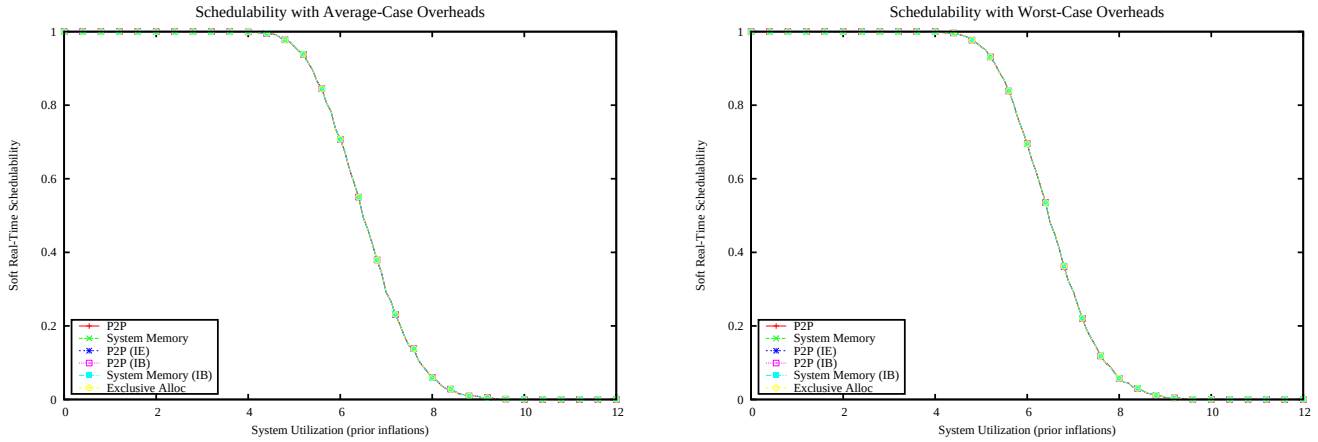

Figure 702: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

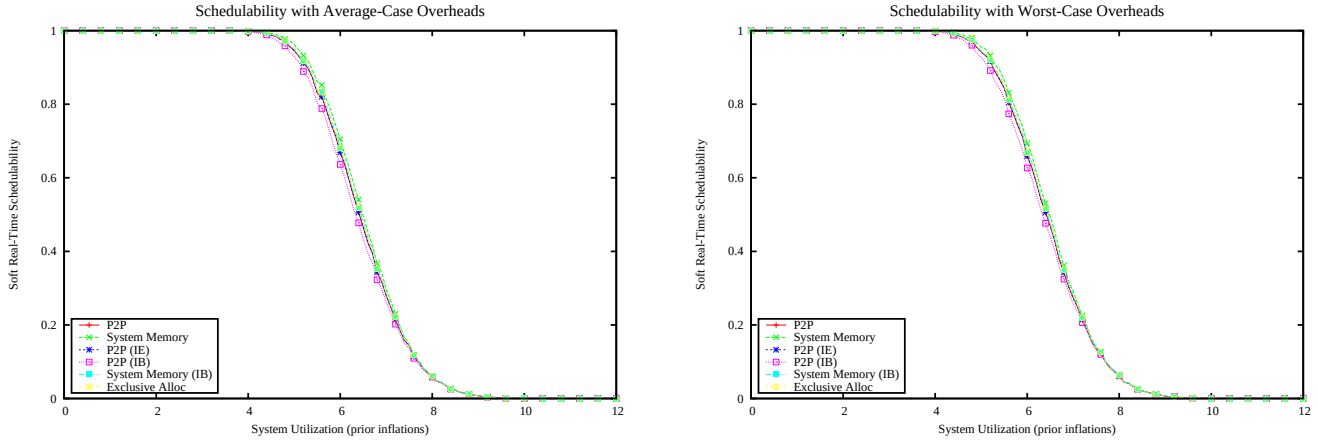

Figure 703: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

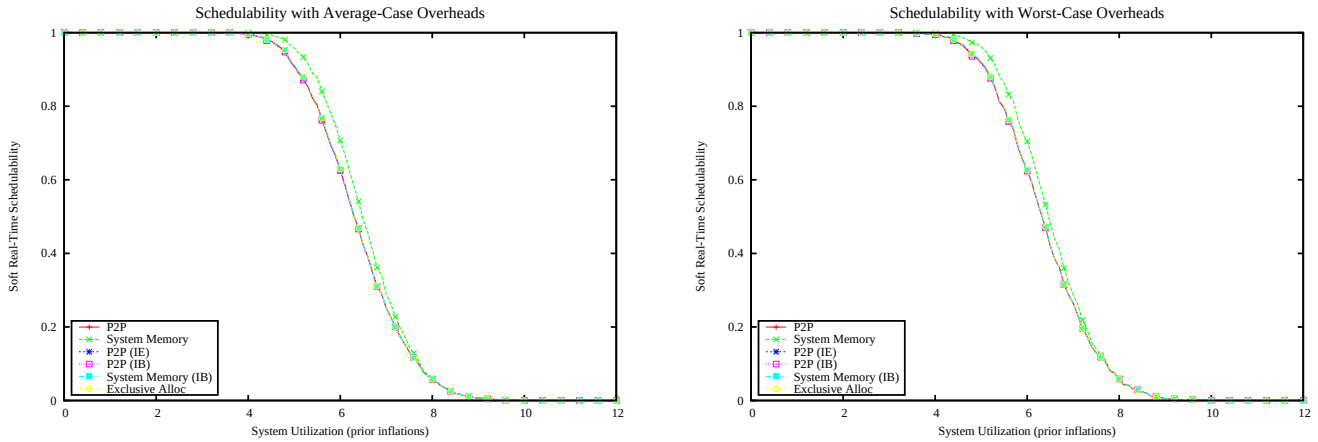

Figure 704: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

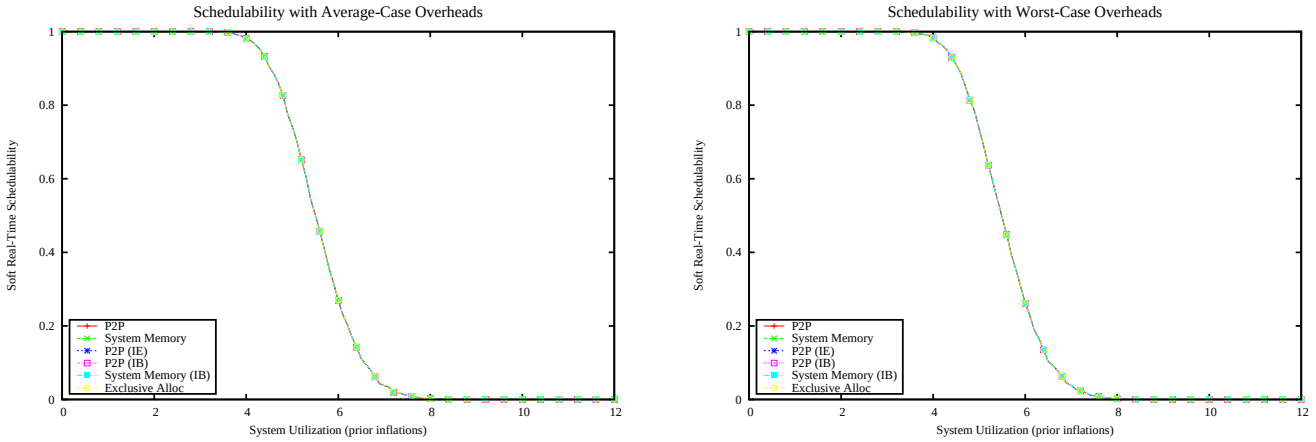

Figure 705: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

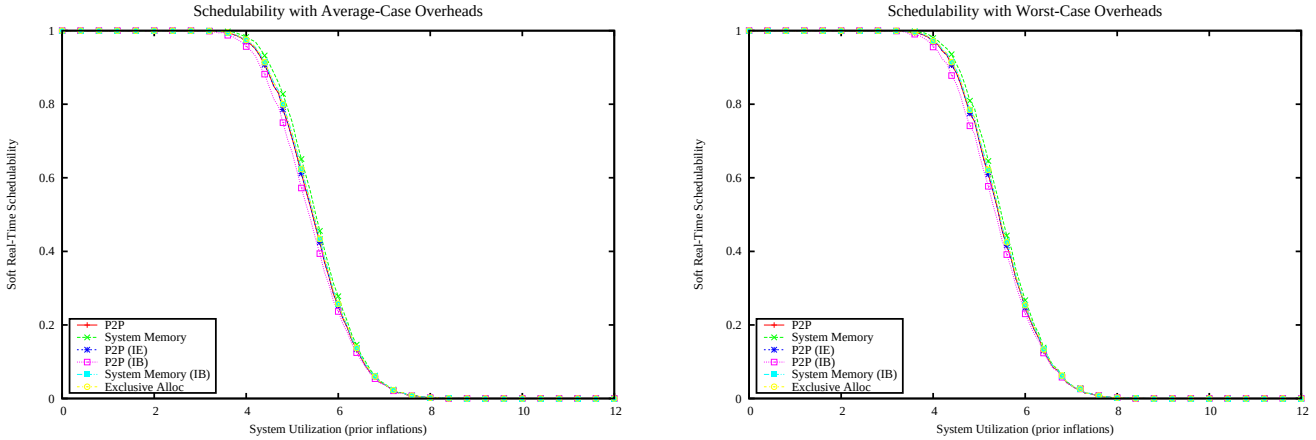

Figure 706: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

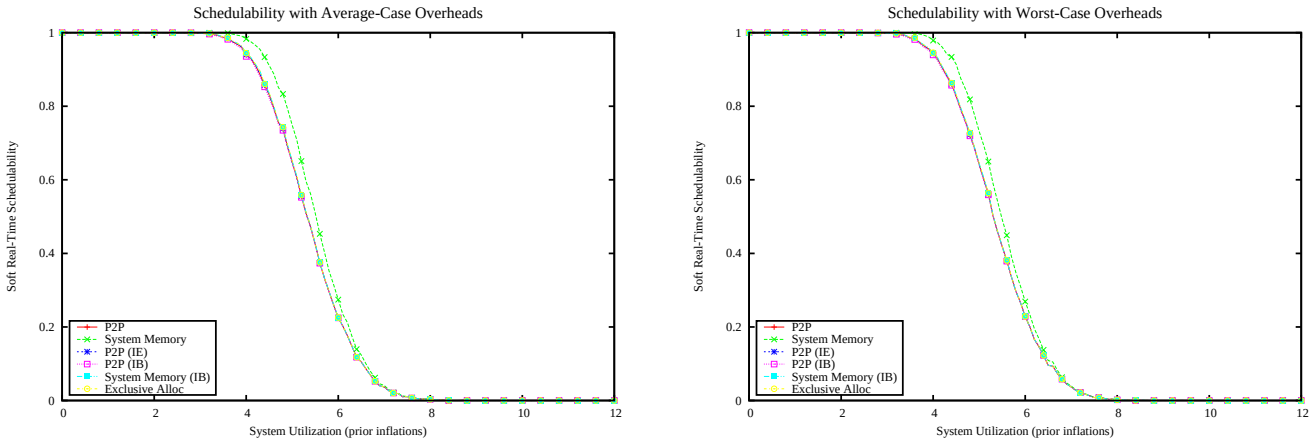

Figure 707: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

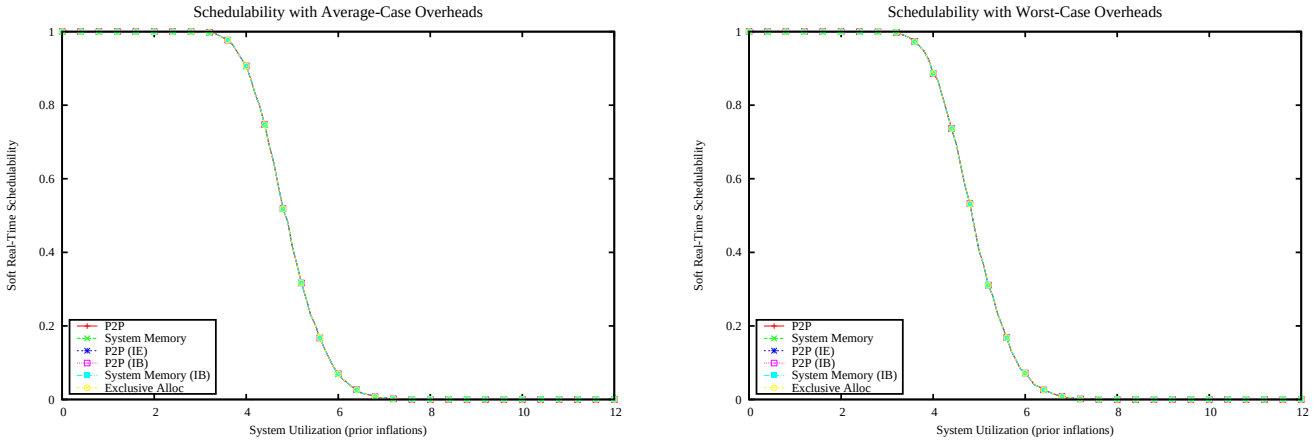

Figure 708: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

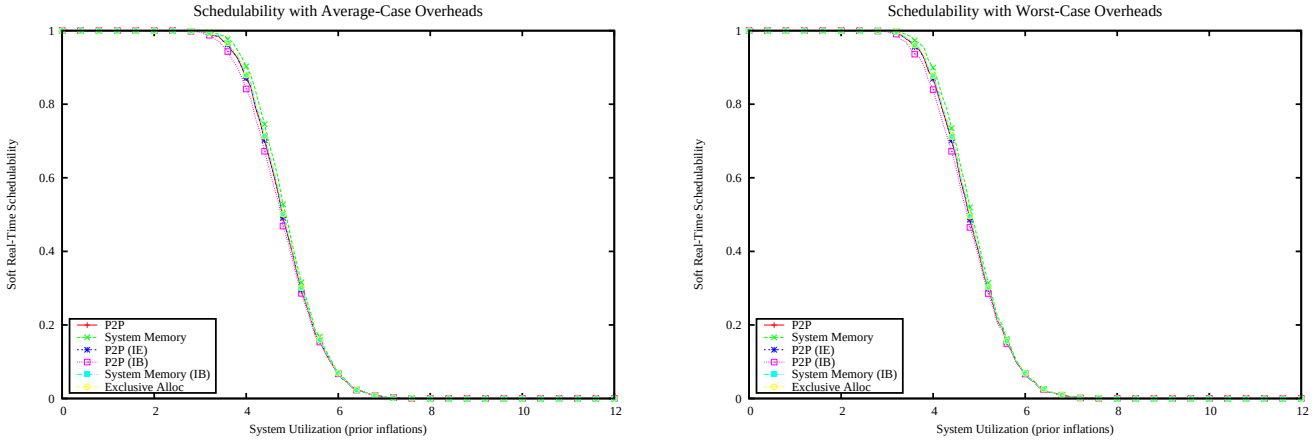

Figure 709: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

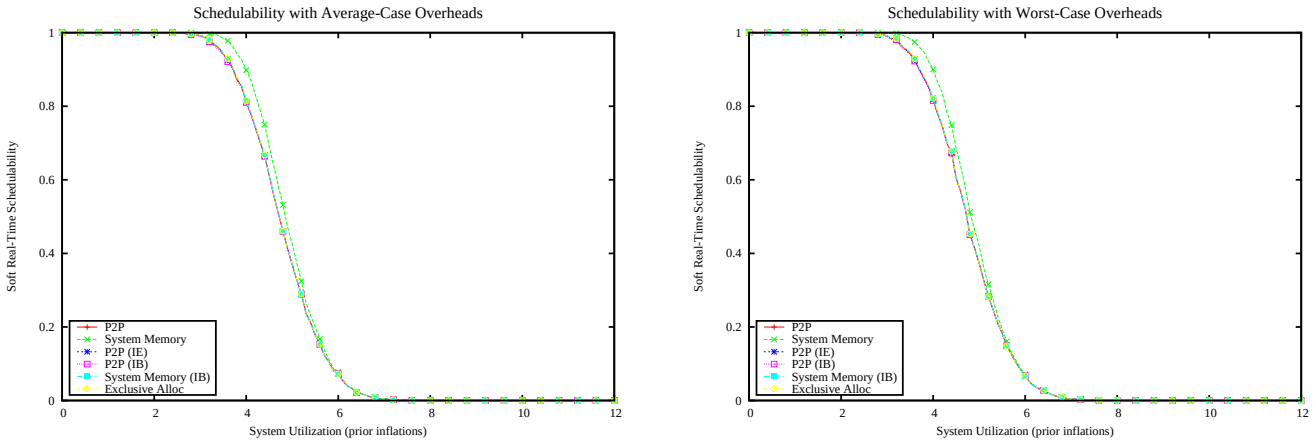

Figure 710: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

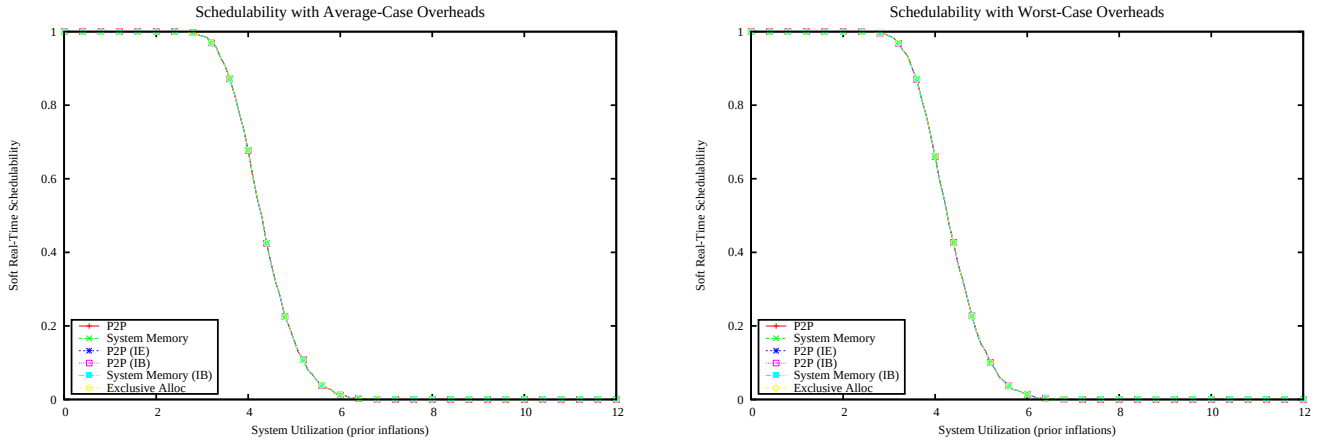

Figure 711: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

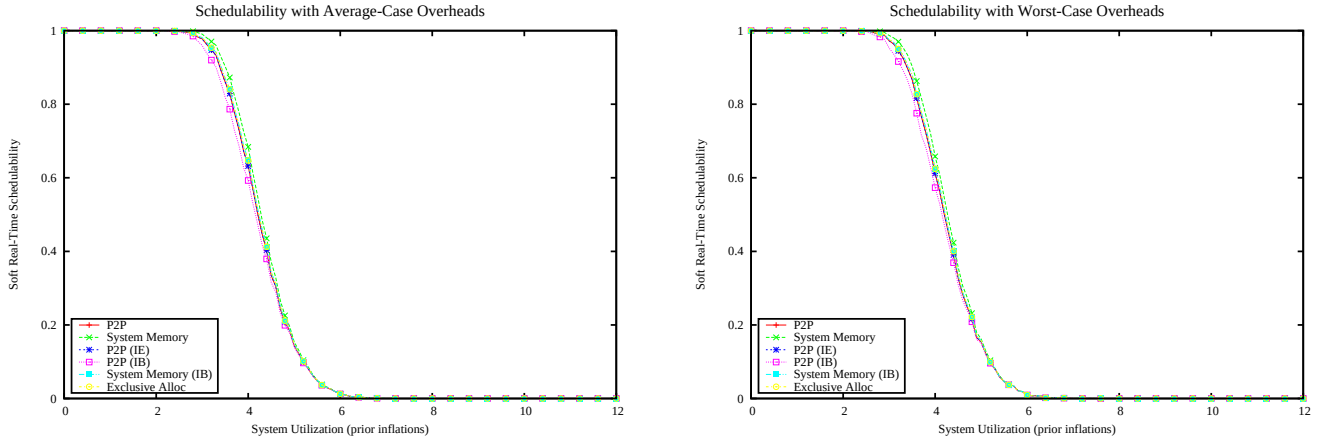

Figure 712: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

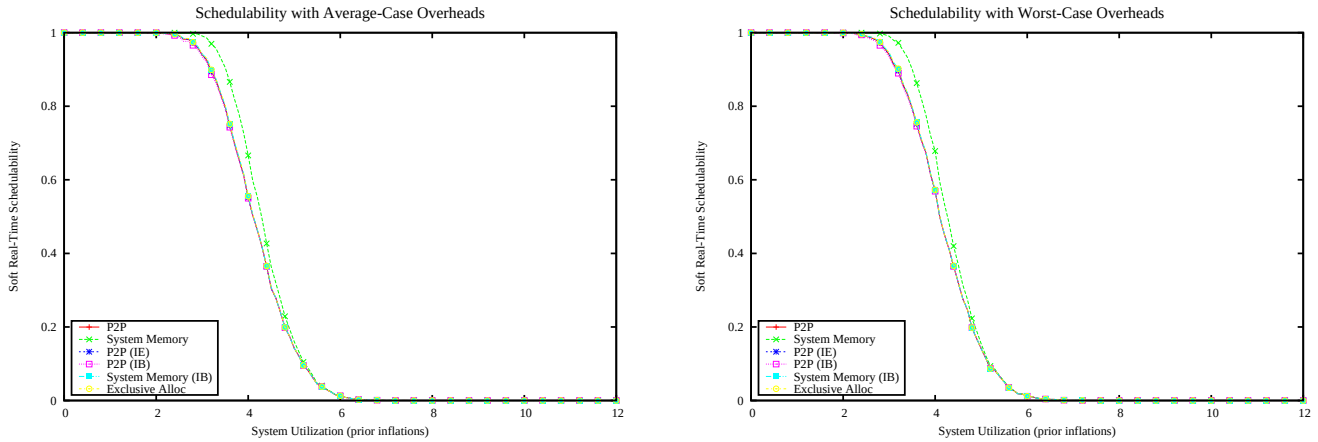

Figure 713: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

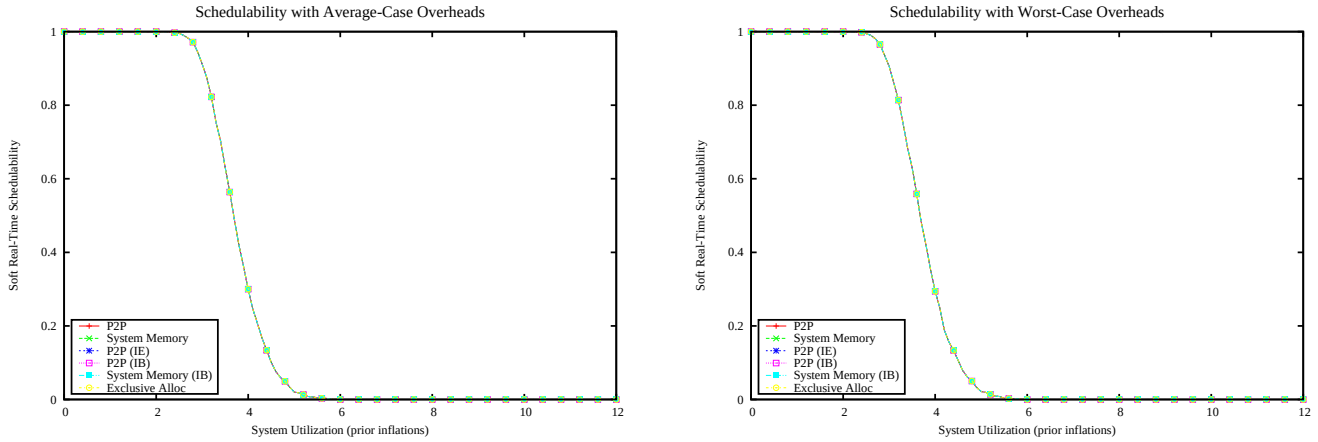

Figure 714: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

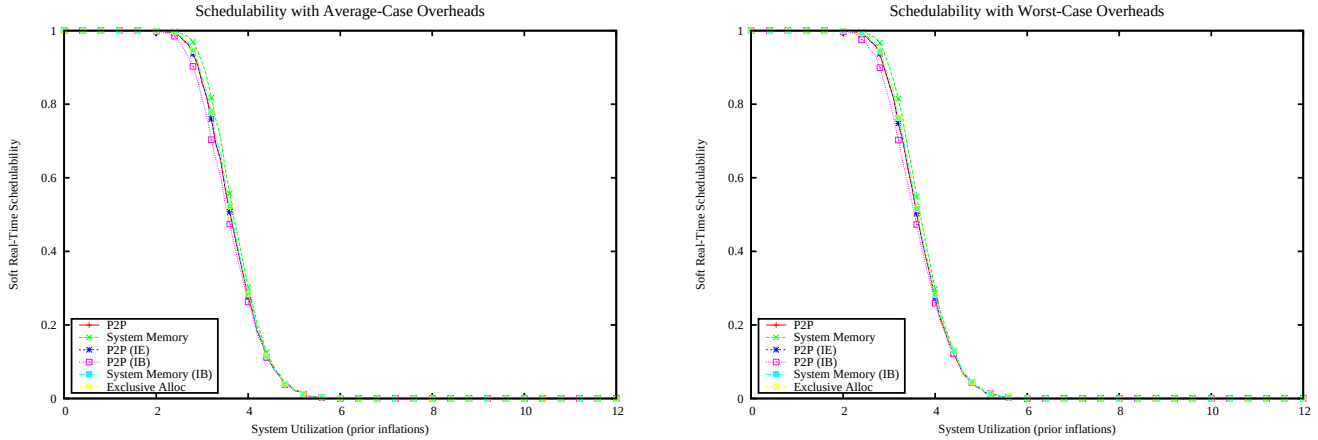

Figure 715: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

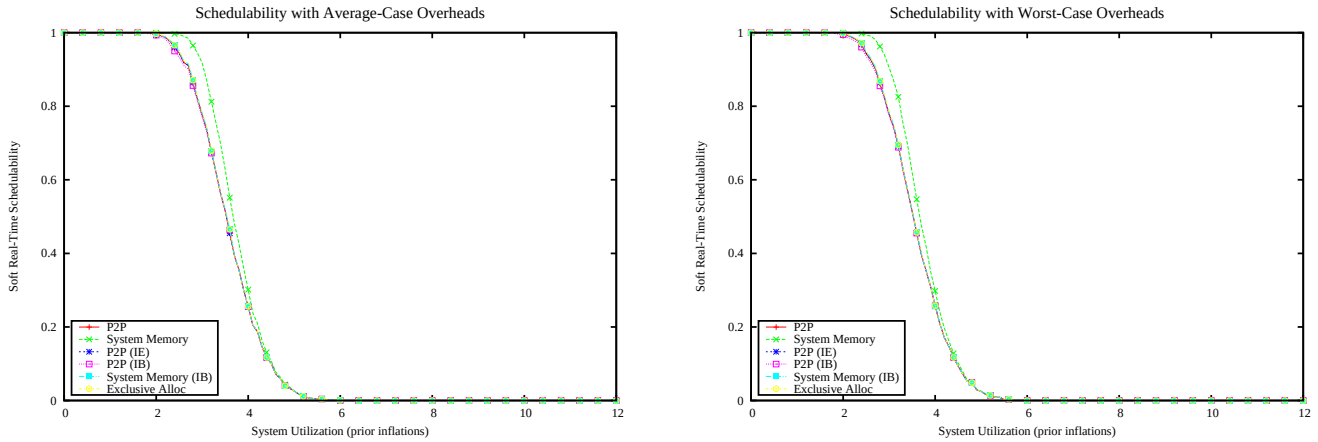

Figure 716: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

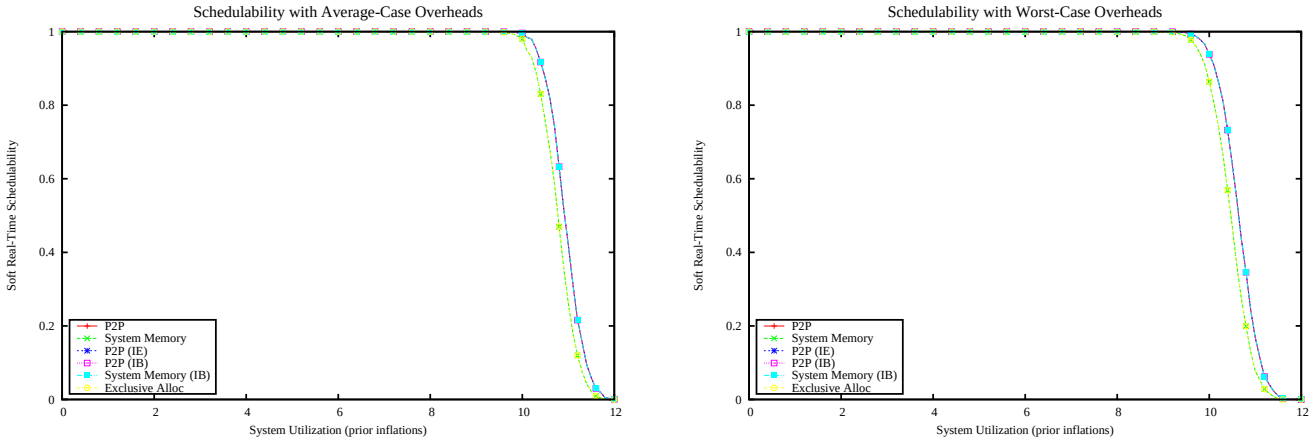

Figure 717: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

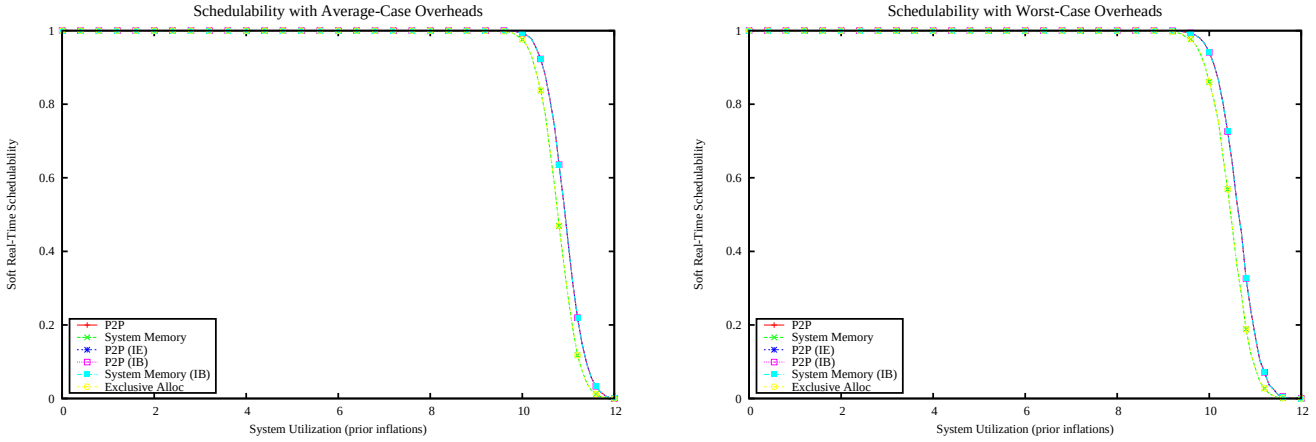

Figure 718: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

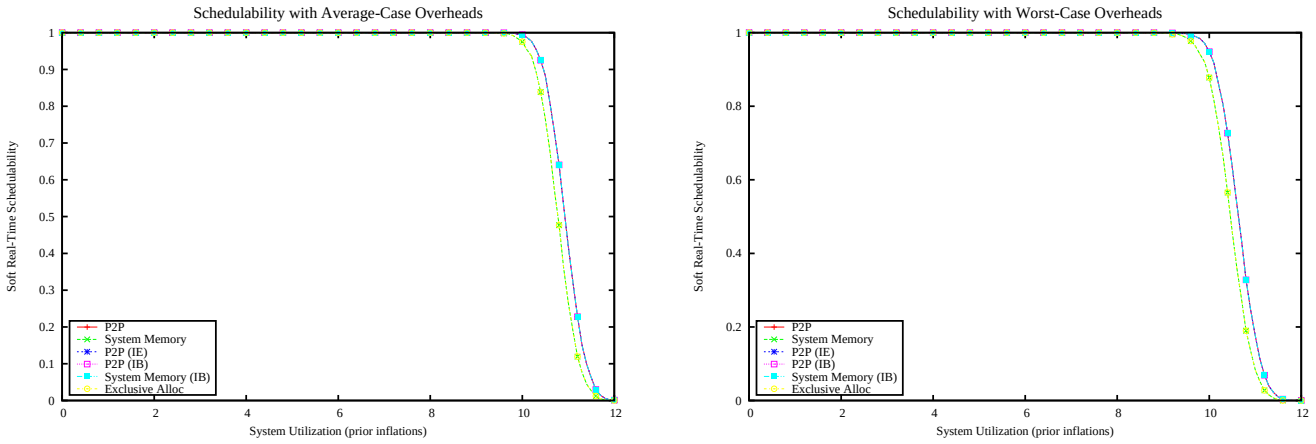

Figure 719: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

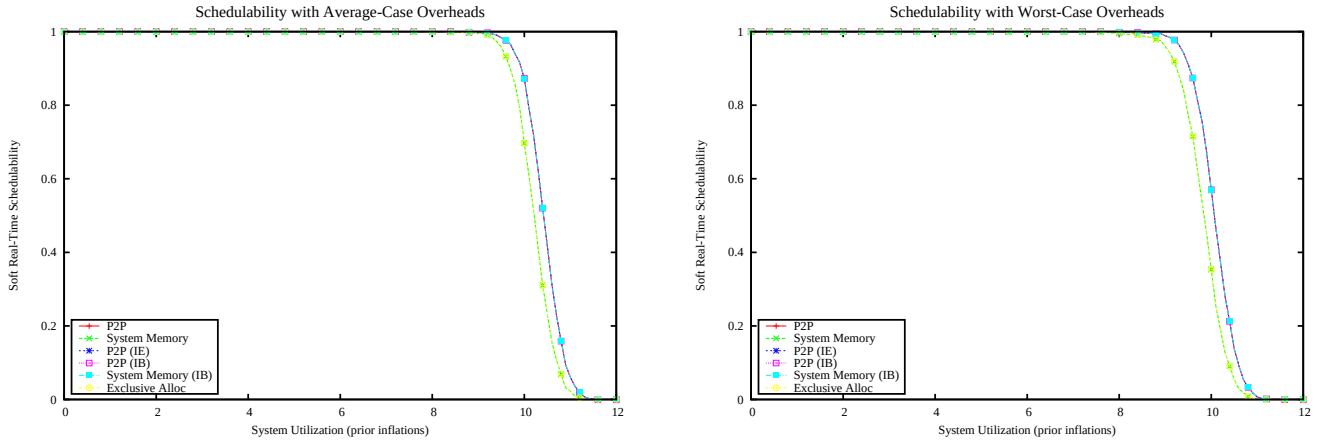

Figure 720: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

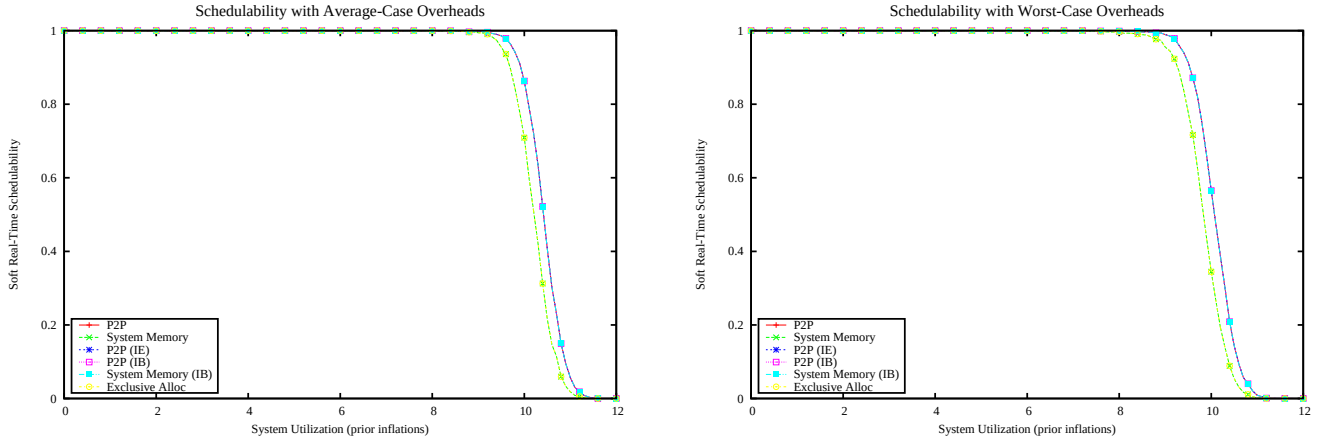

Figure 721: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

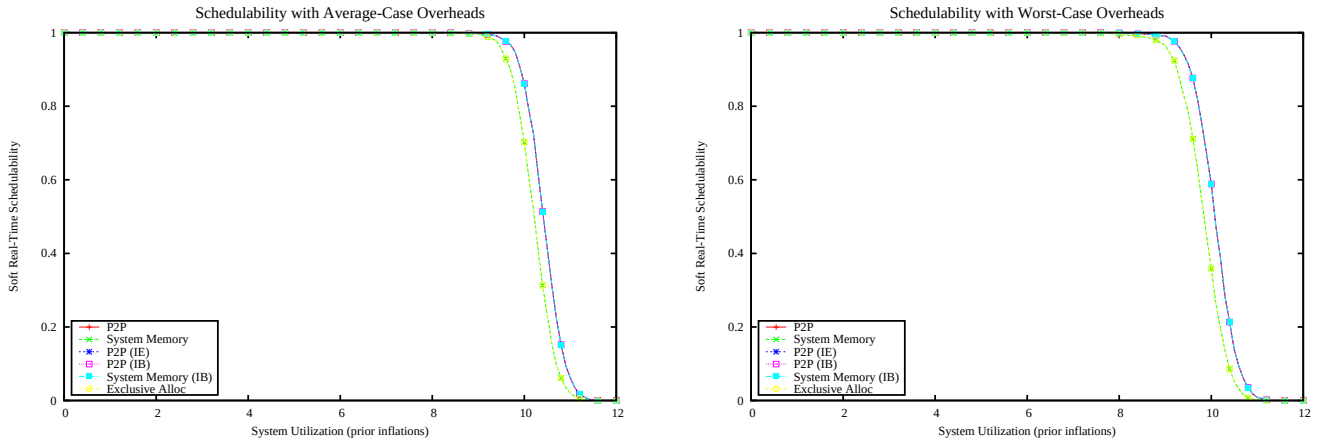

Figure 722: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

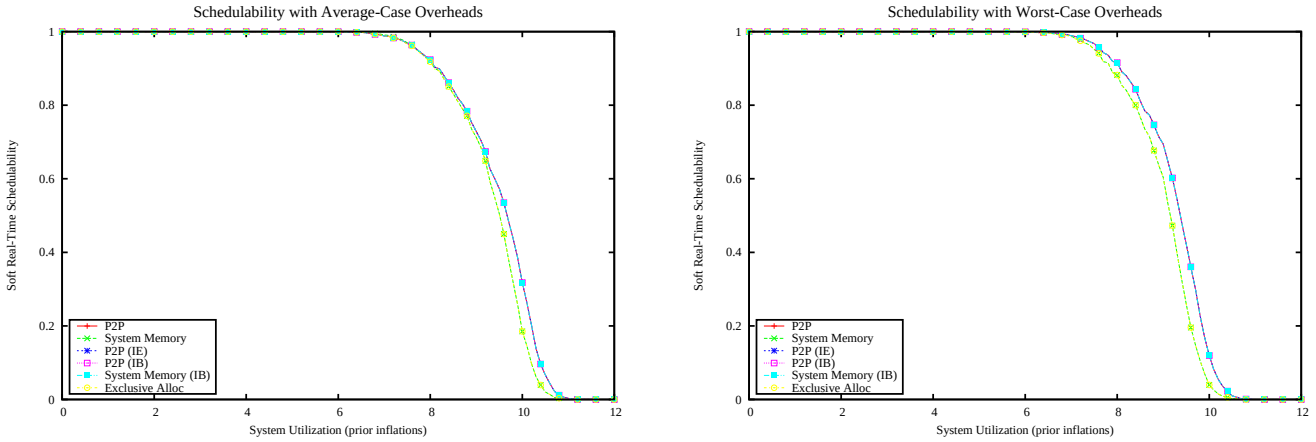

Figure 723: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

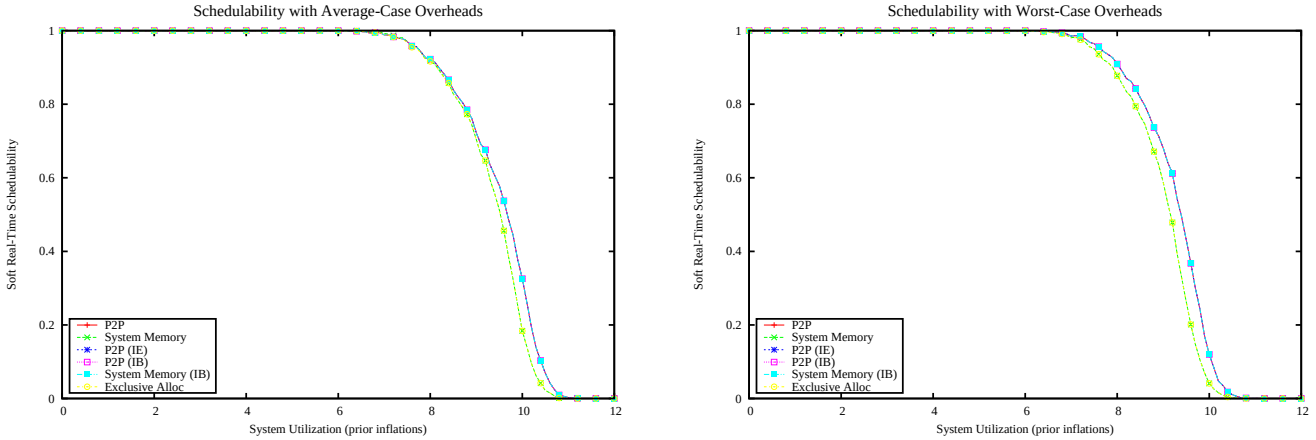

Figure 724: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

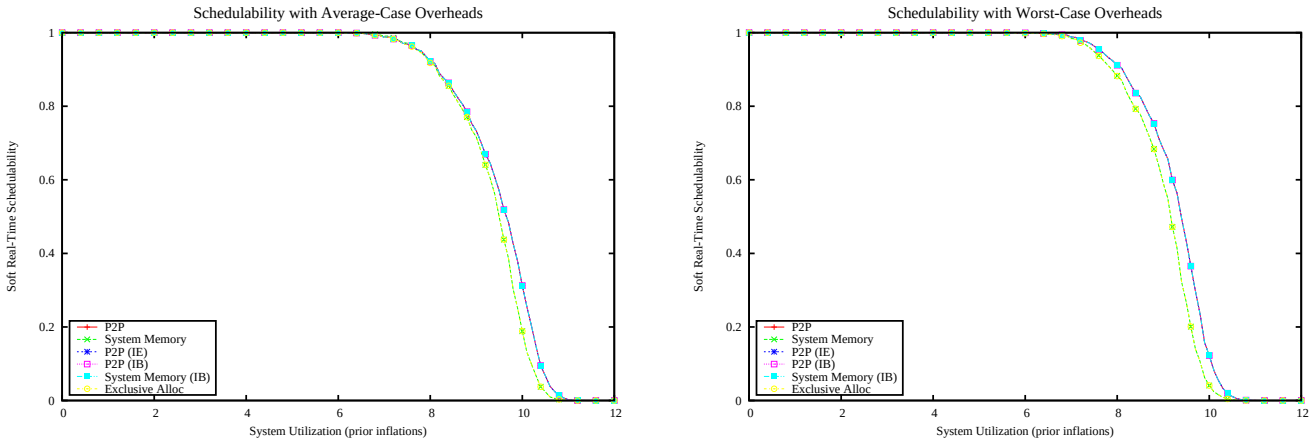

Figure 725: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

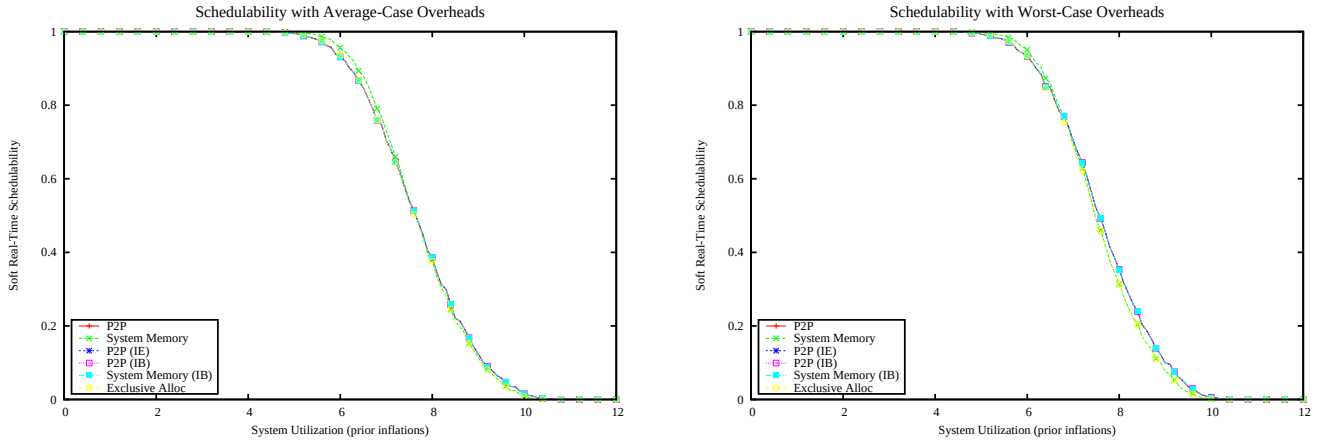

Figure 726: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

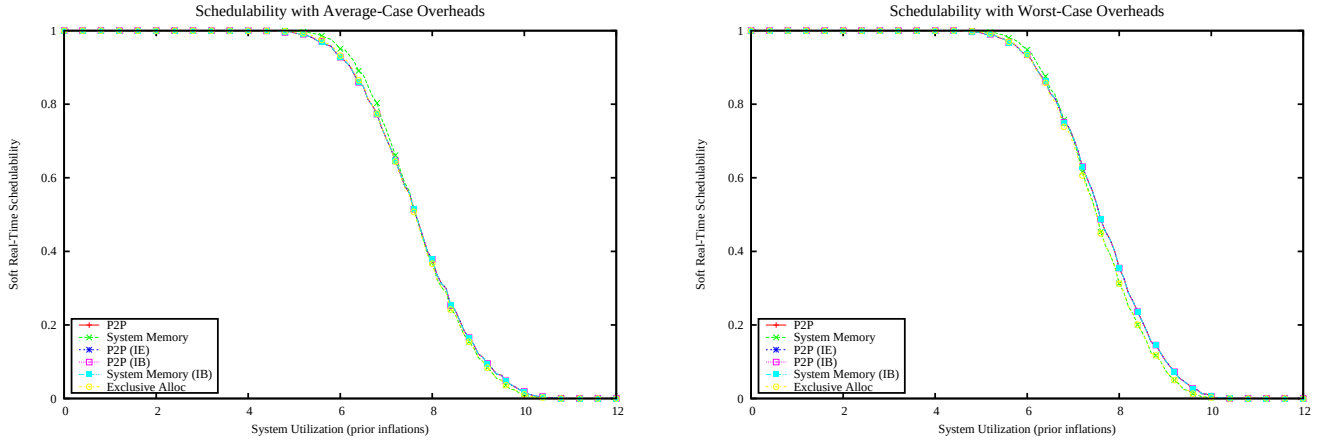

Figure 727: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

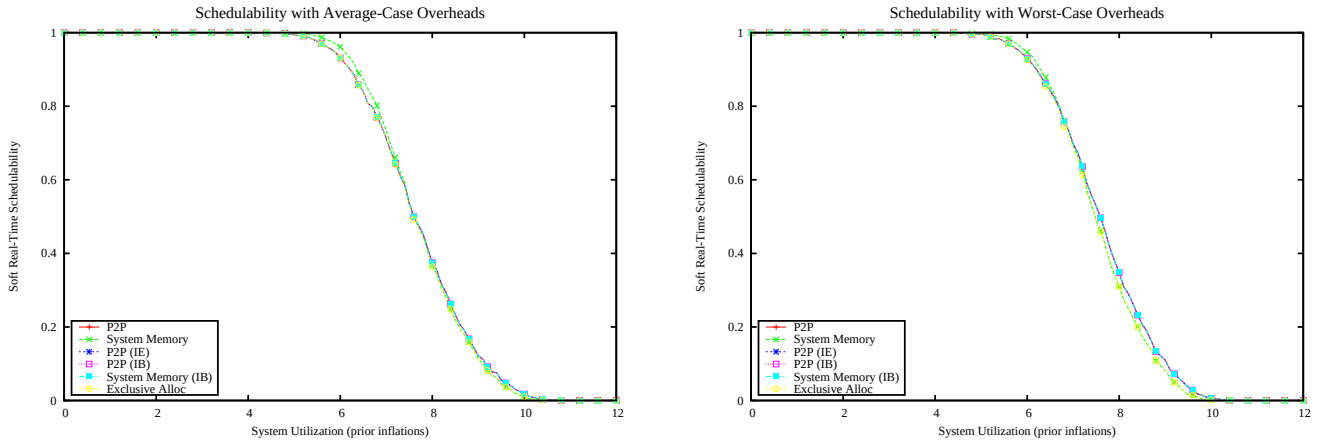

Figure 728: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

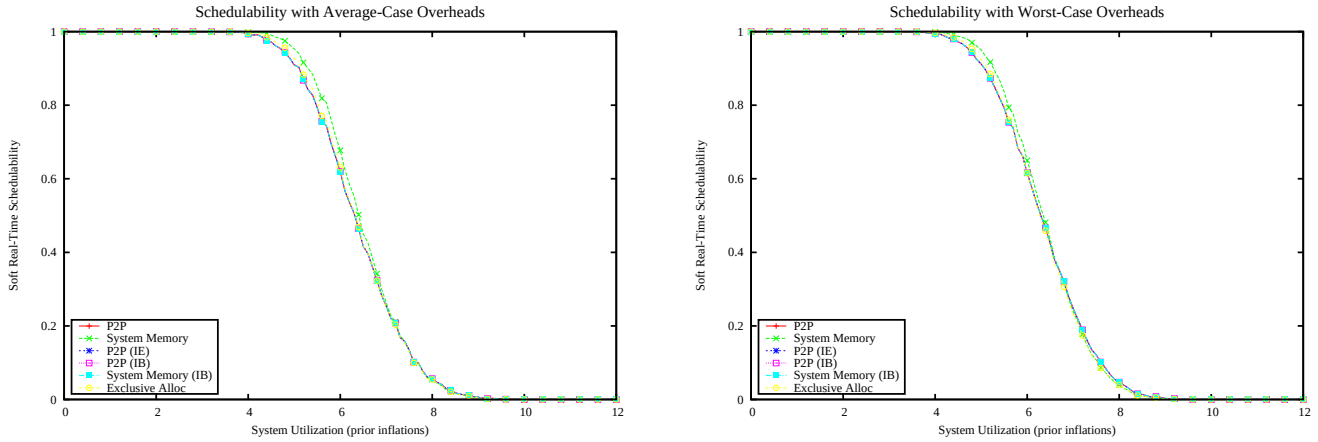

Figure 729: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

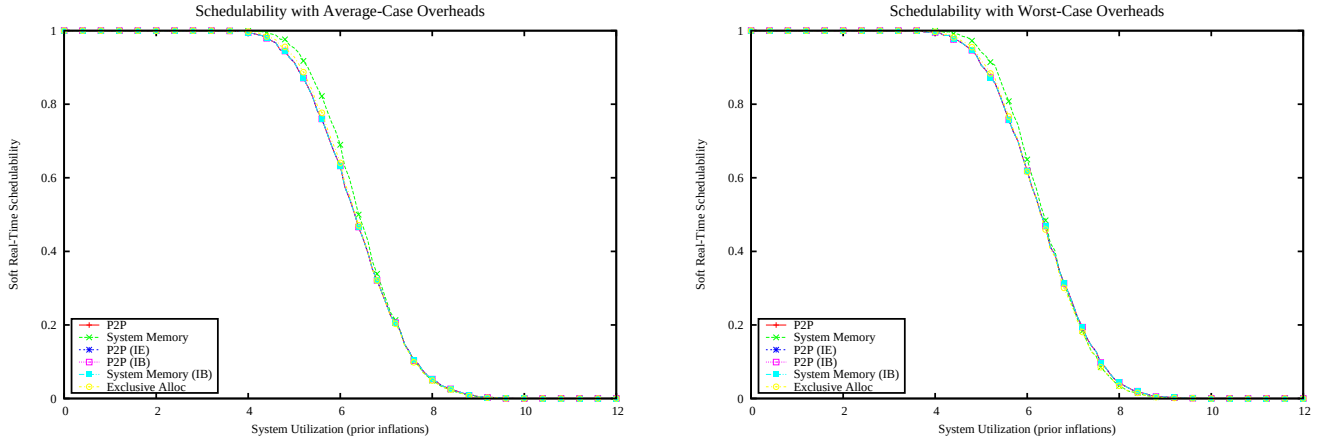

Figure 730: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

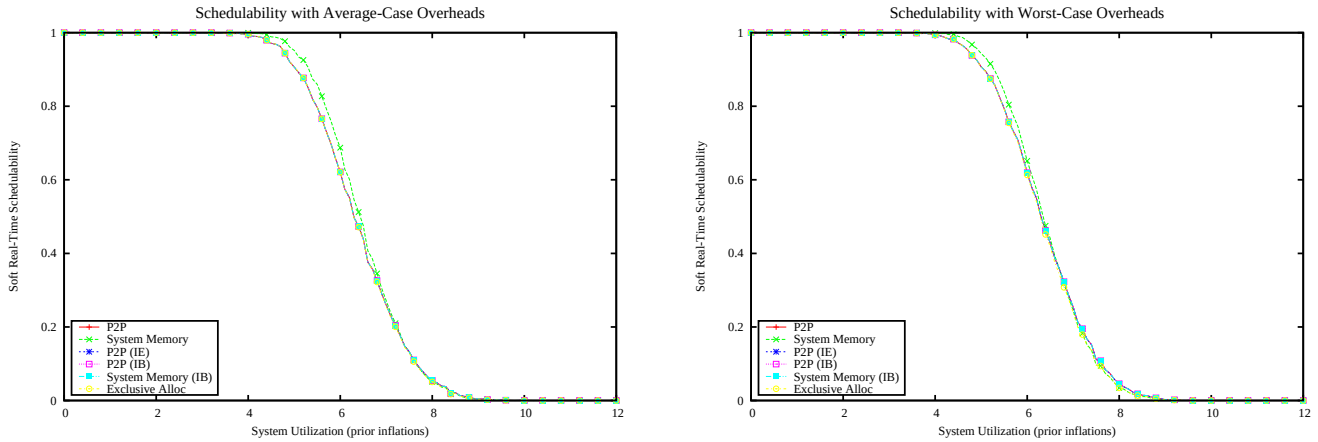

Figure 731: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

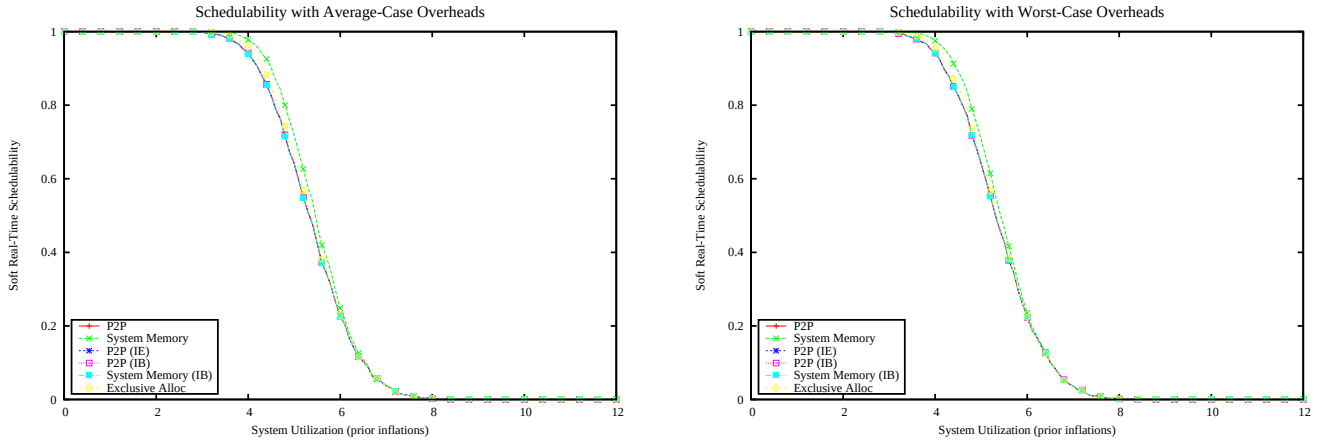

Figure 732: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

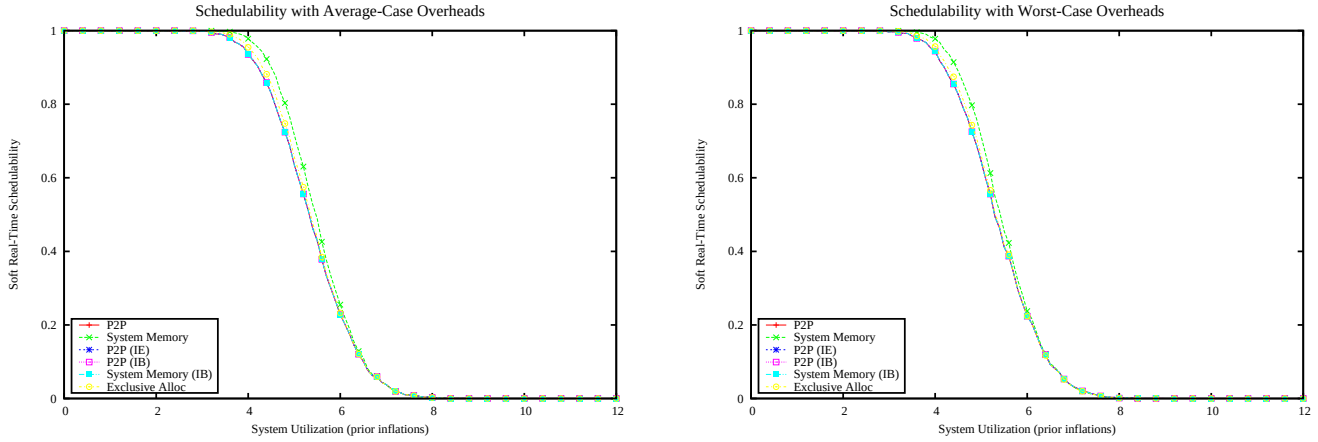

Figure 733: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

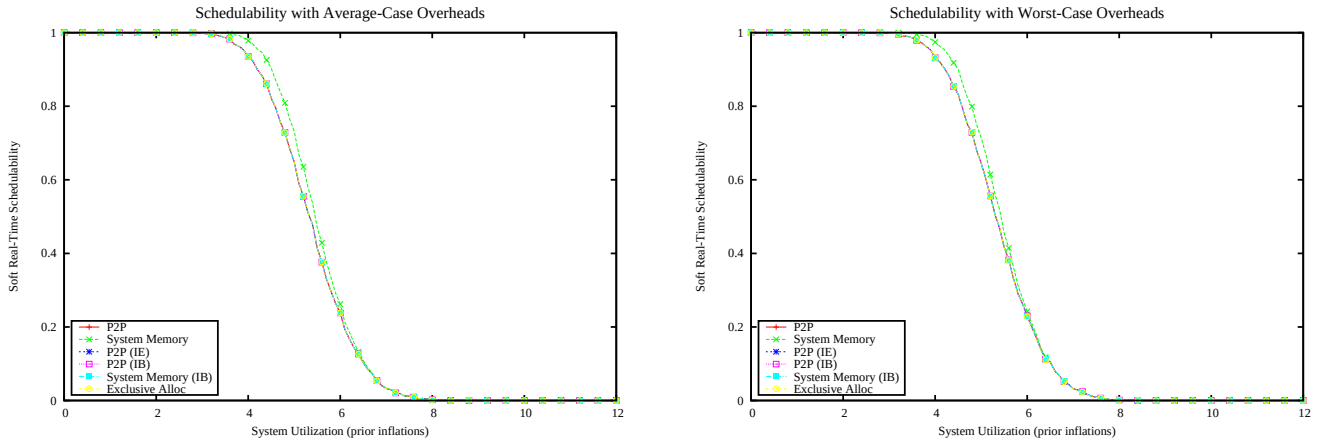

Figure 734: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

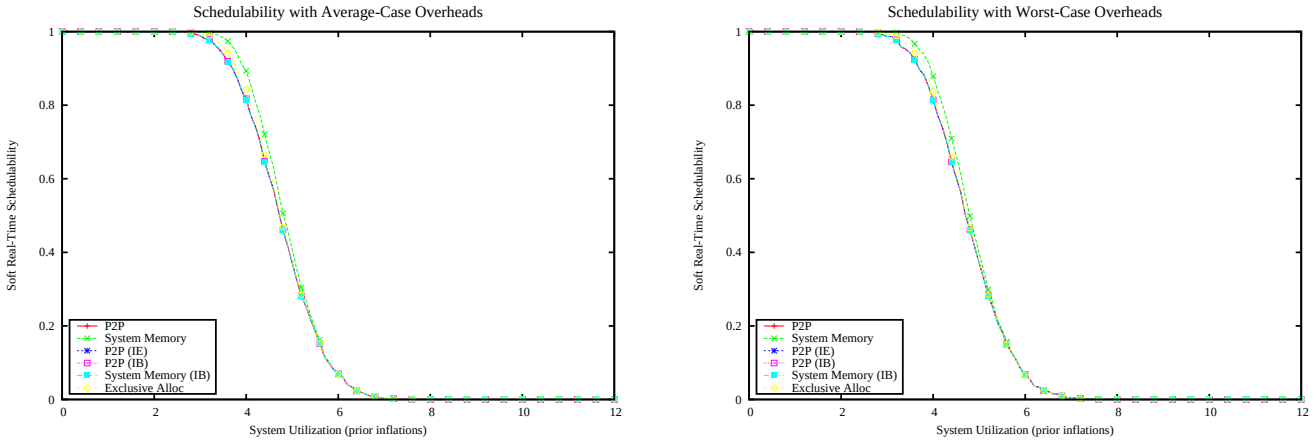

Figure 735: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

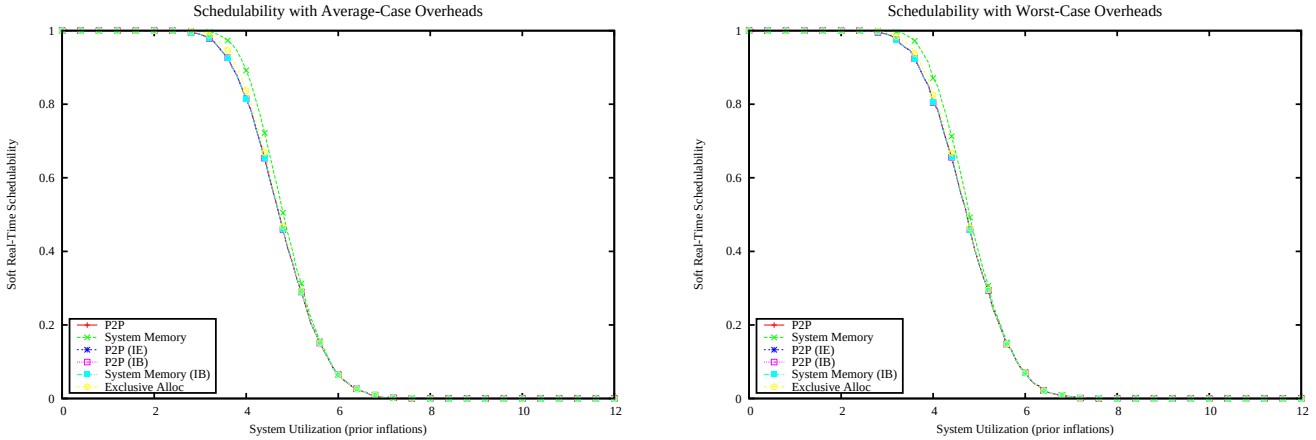

Figure 736: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

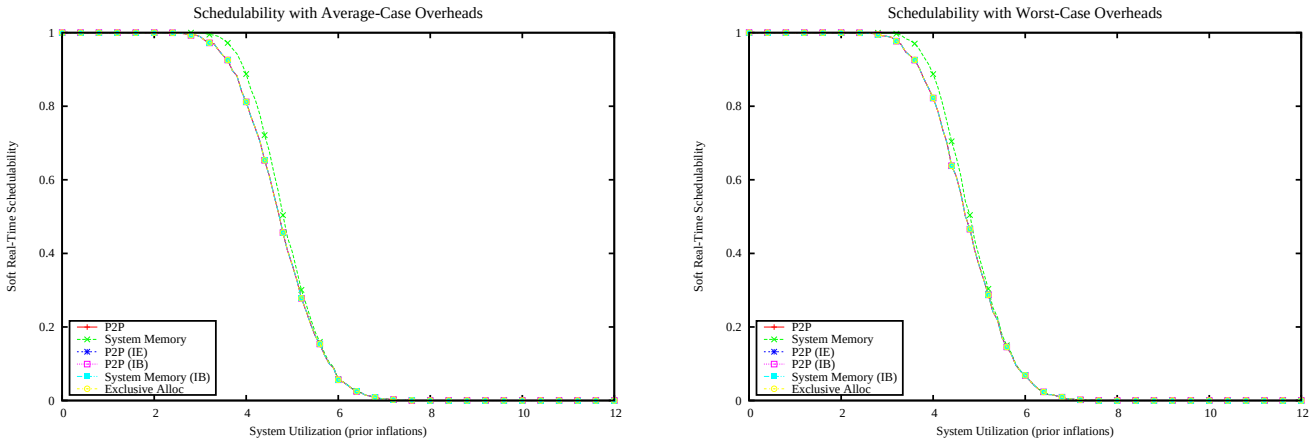

Figure 737: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

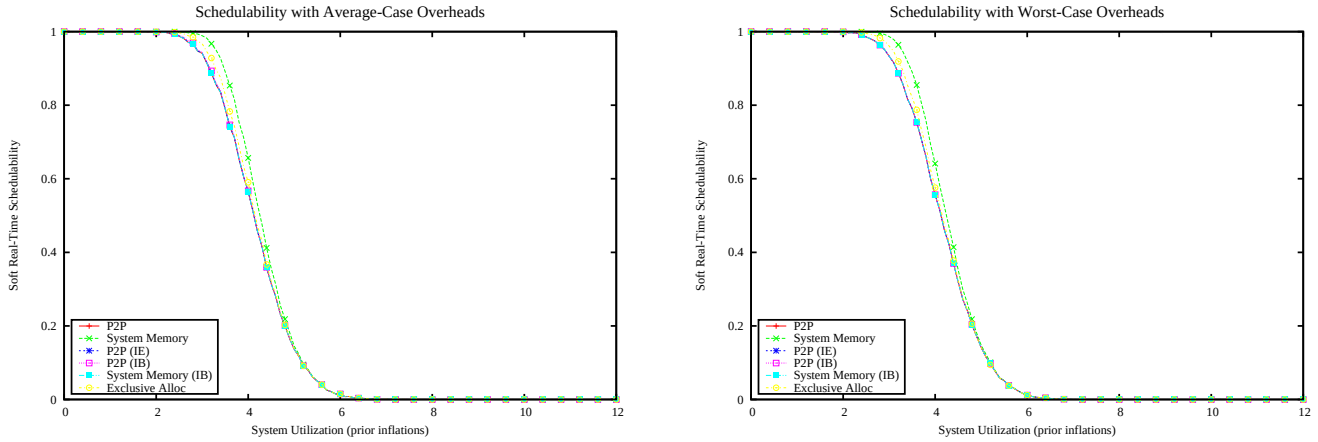

Figure 738: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

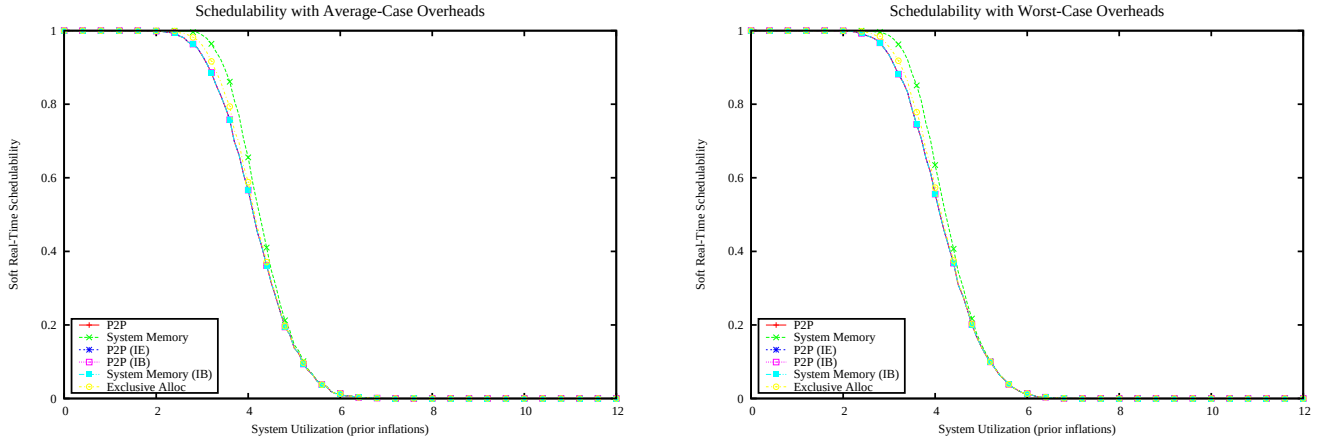

Figure 739: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

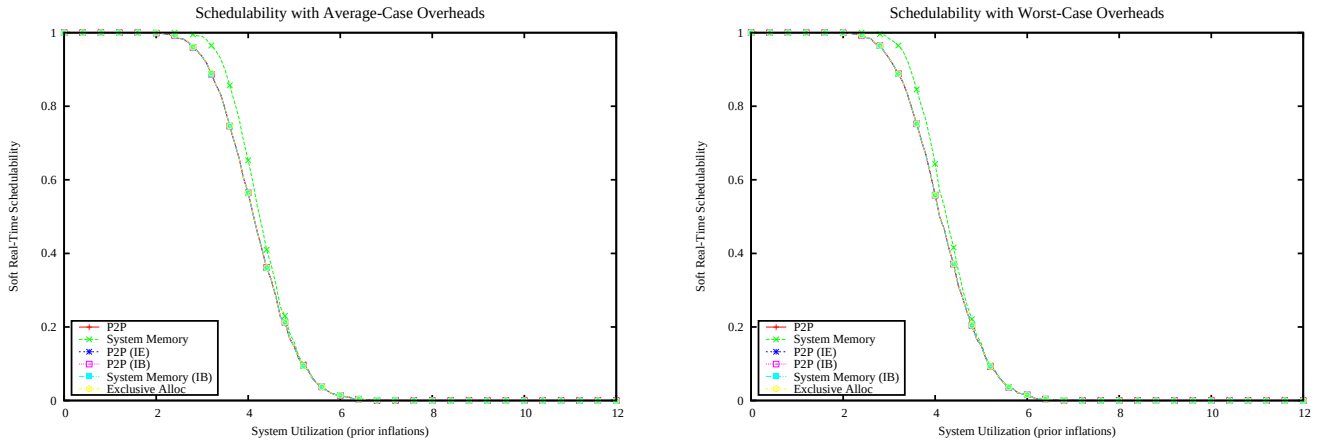

Figure 740: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

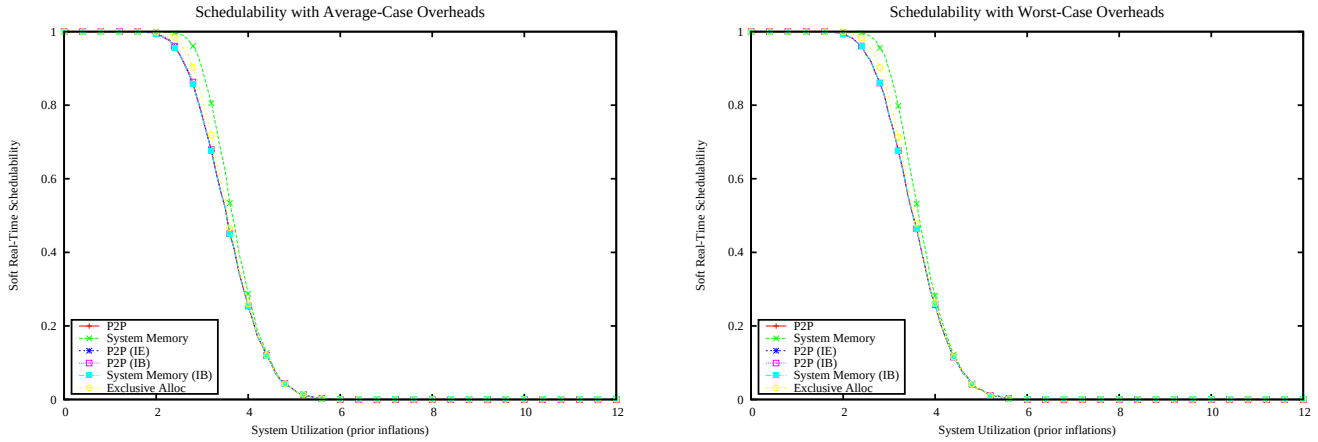

Figure 741: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

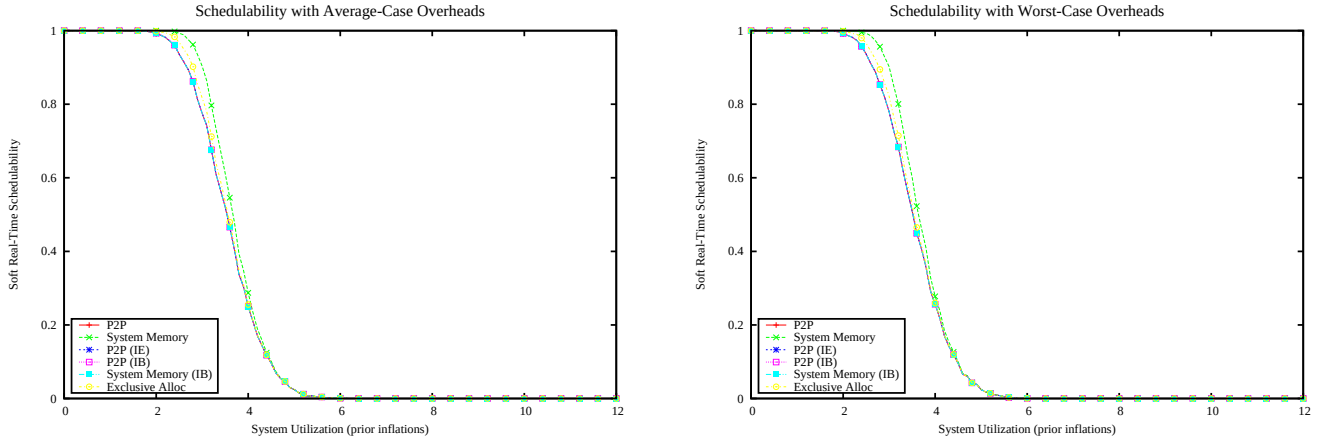

Figure 742: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

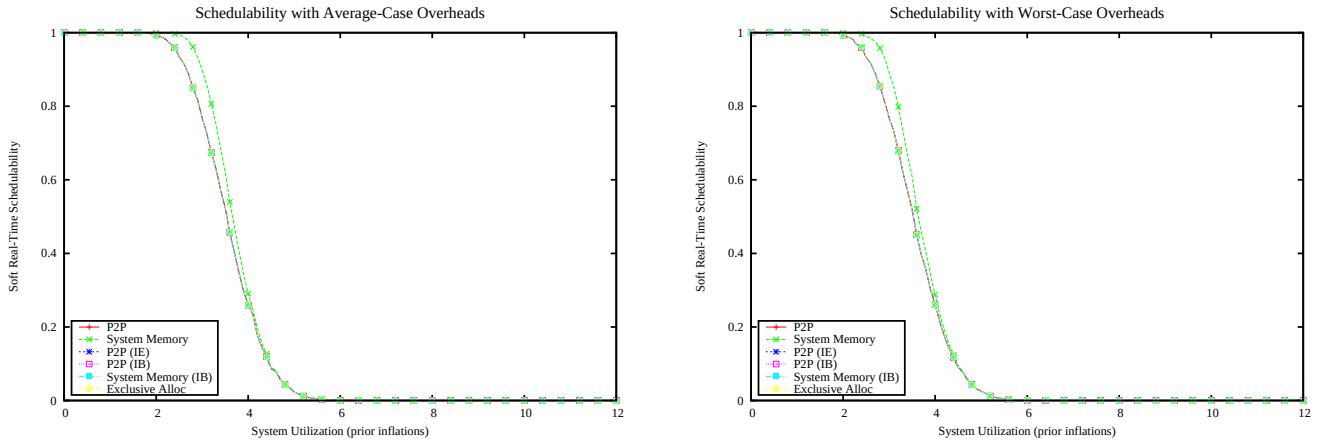

Figure 743: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

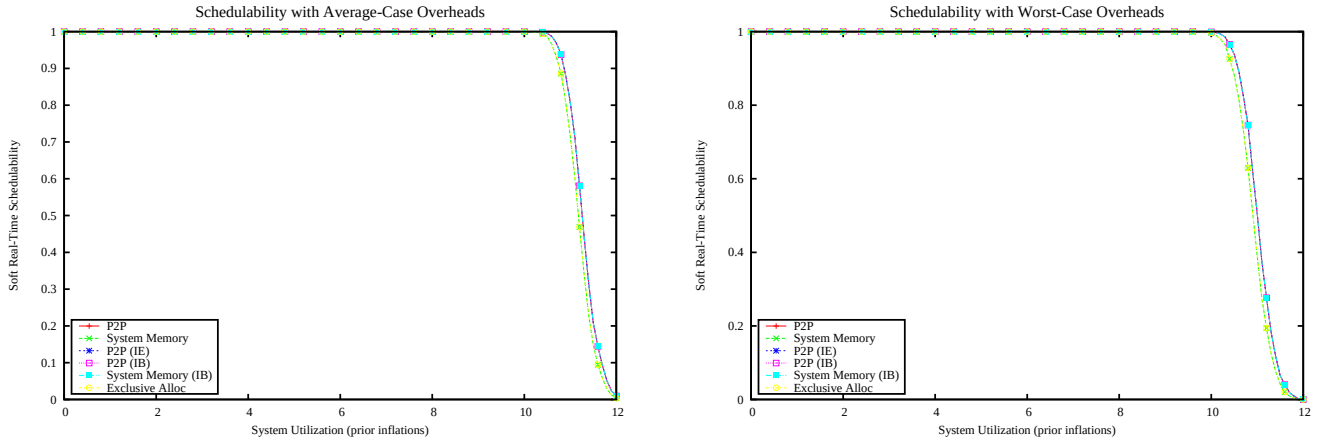

Figure 744: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

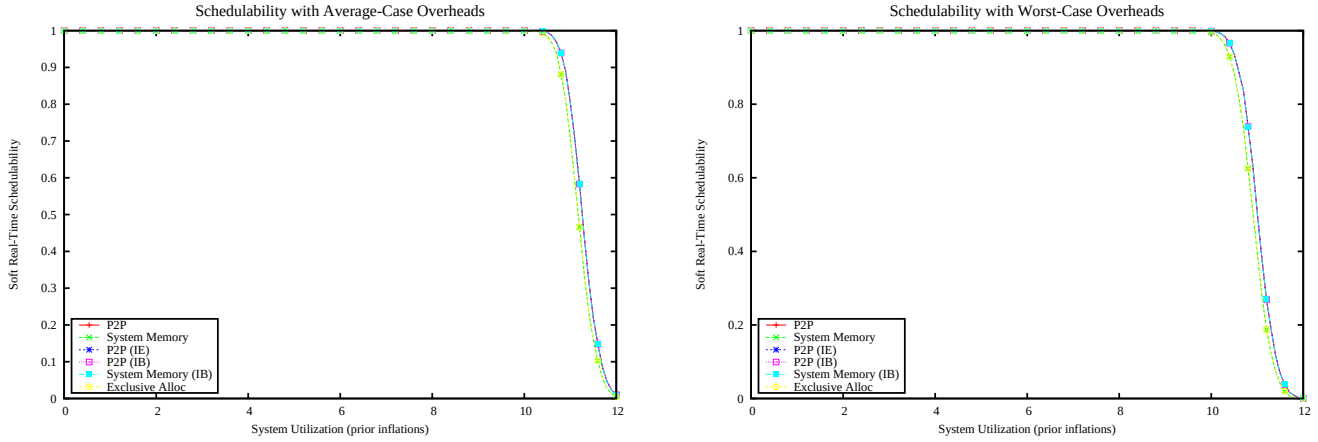

Figure 745: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

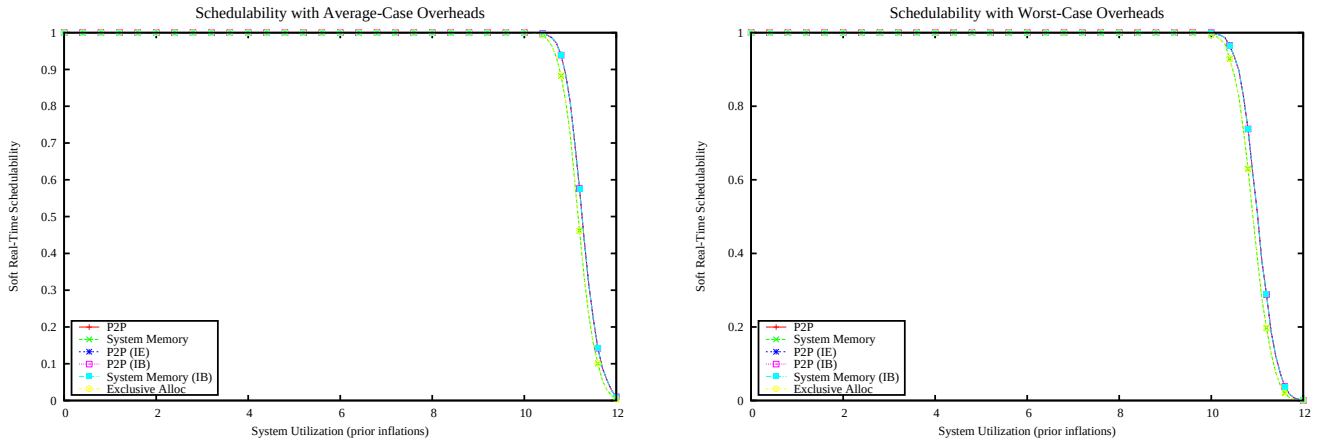

Figure 746: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

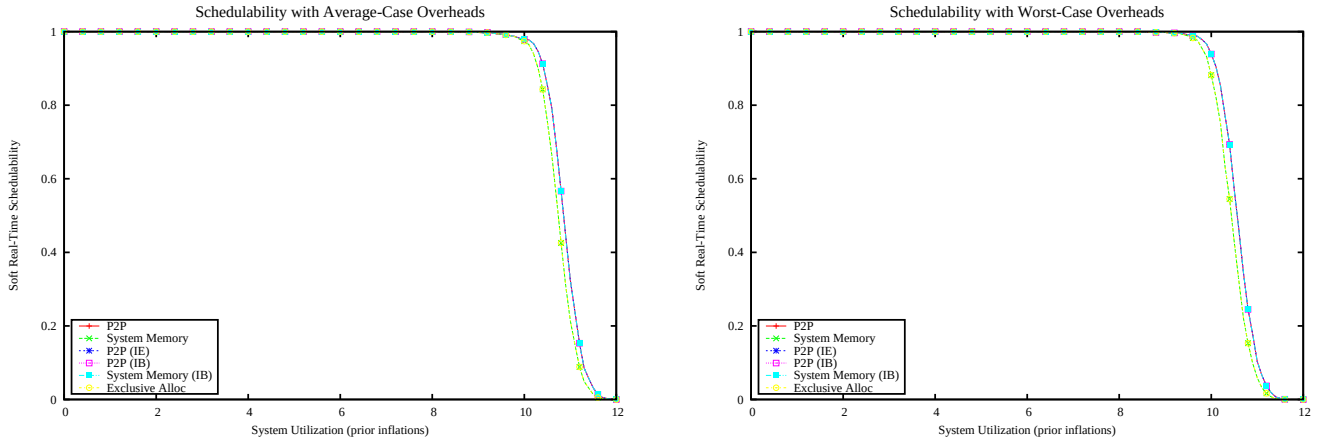

Figure 747: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

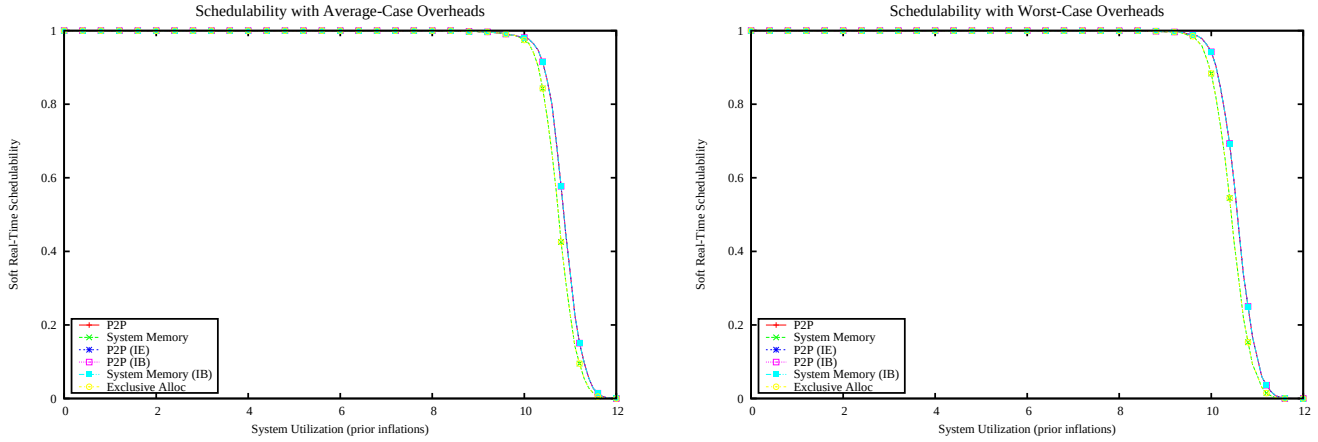

Figure 748: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

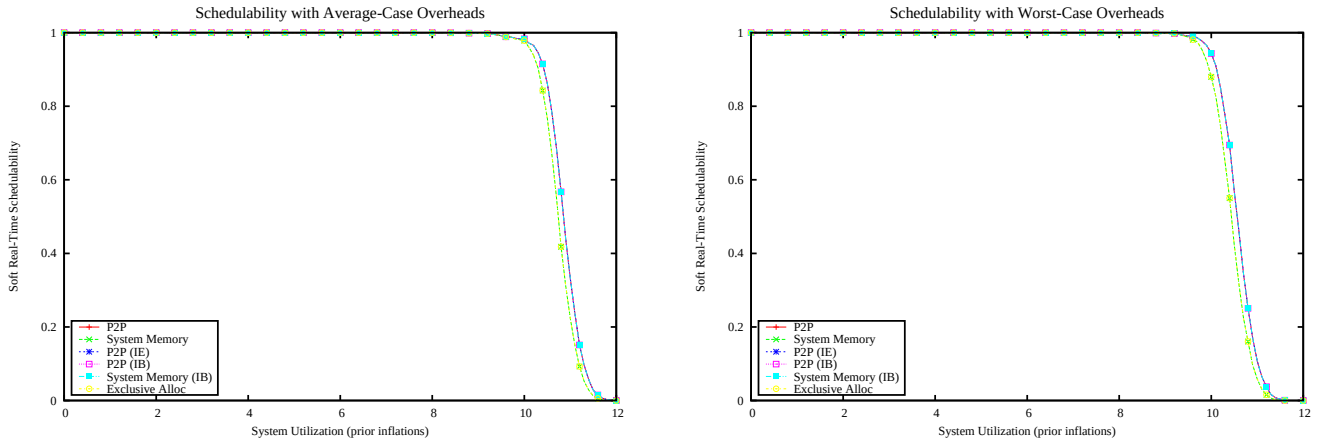

Figure 749: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

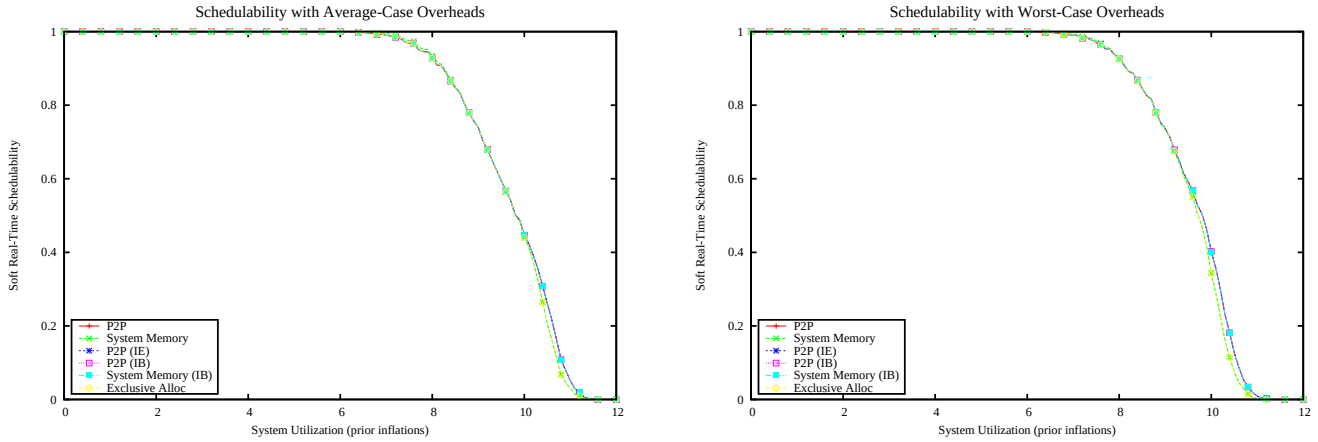

Figure 750: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

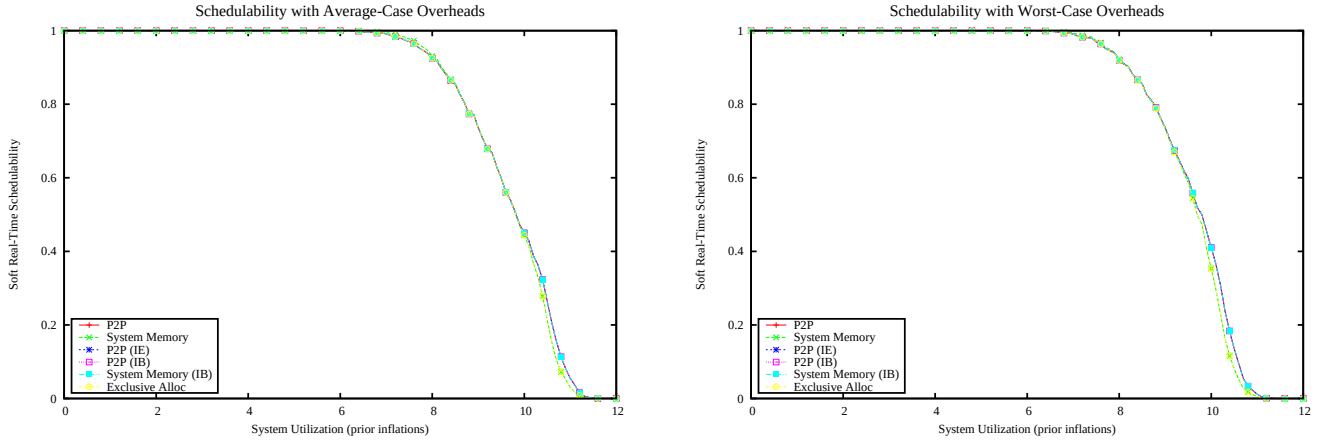

Figure 751: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

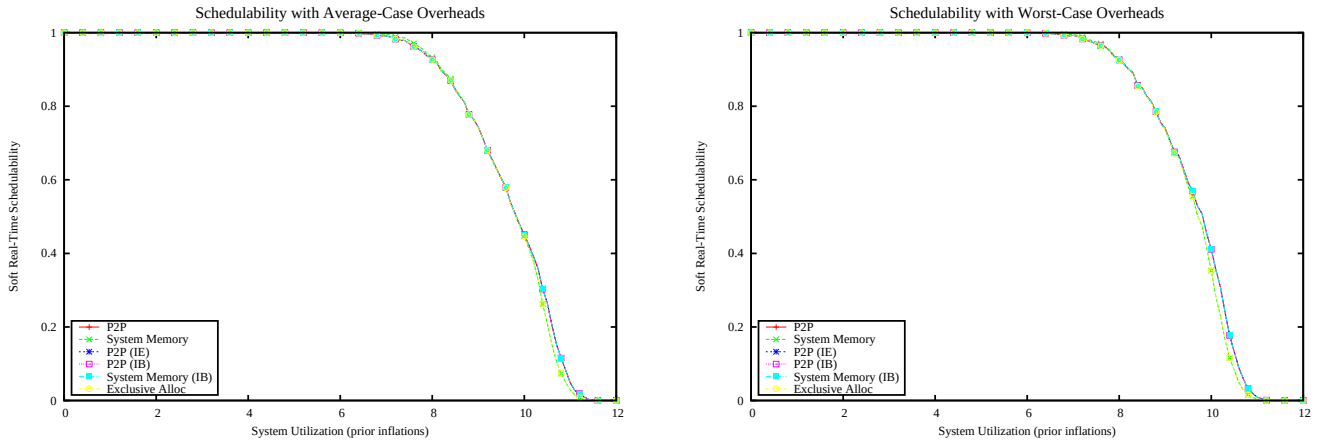

Figure 752: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

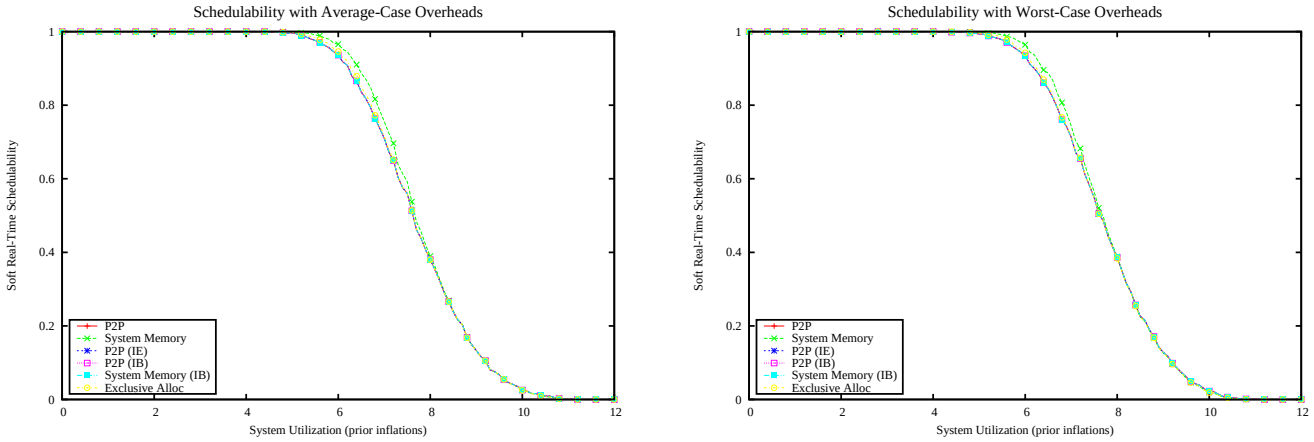

Figure 753: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

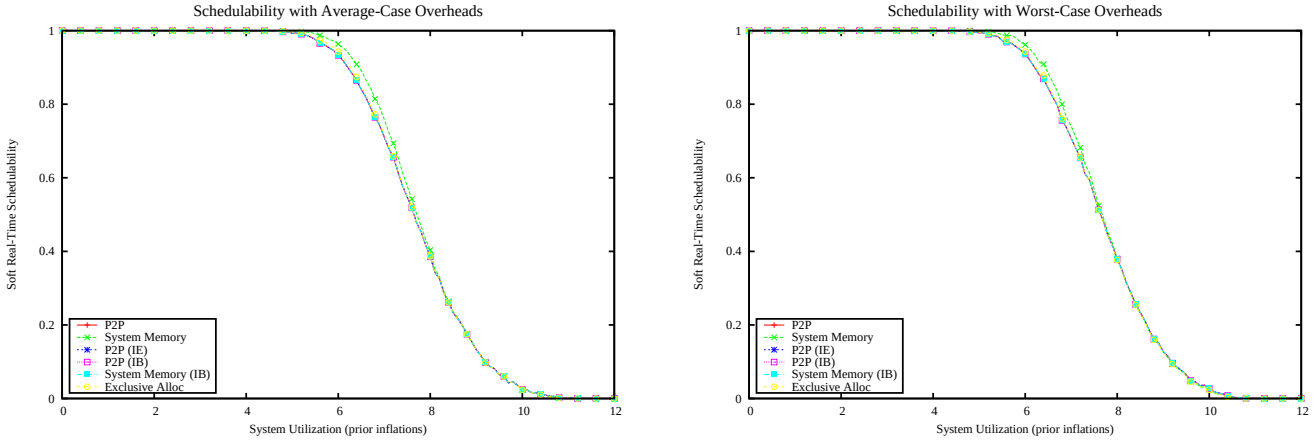

Figure 754: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

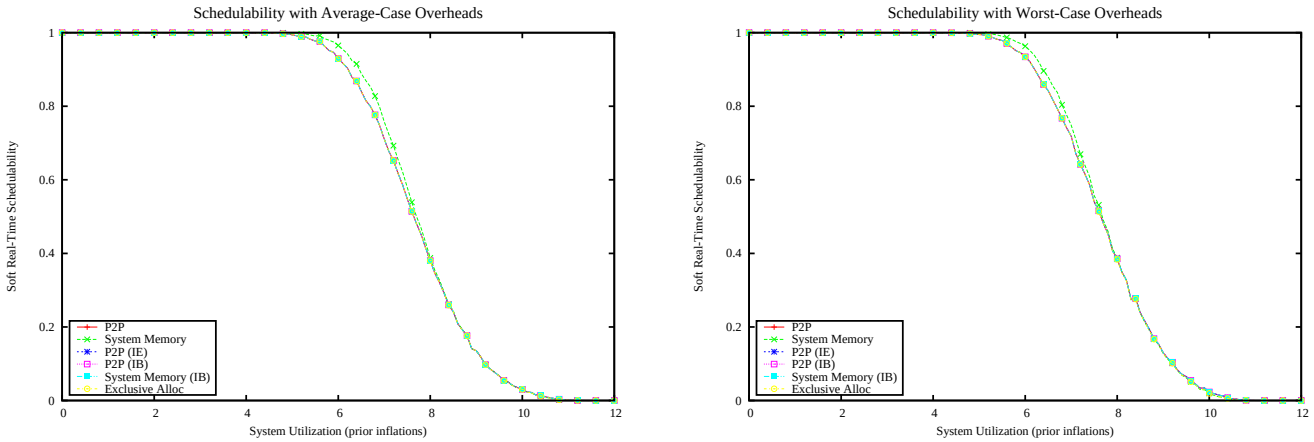

Figure 755: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

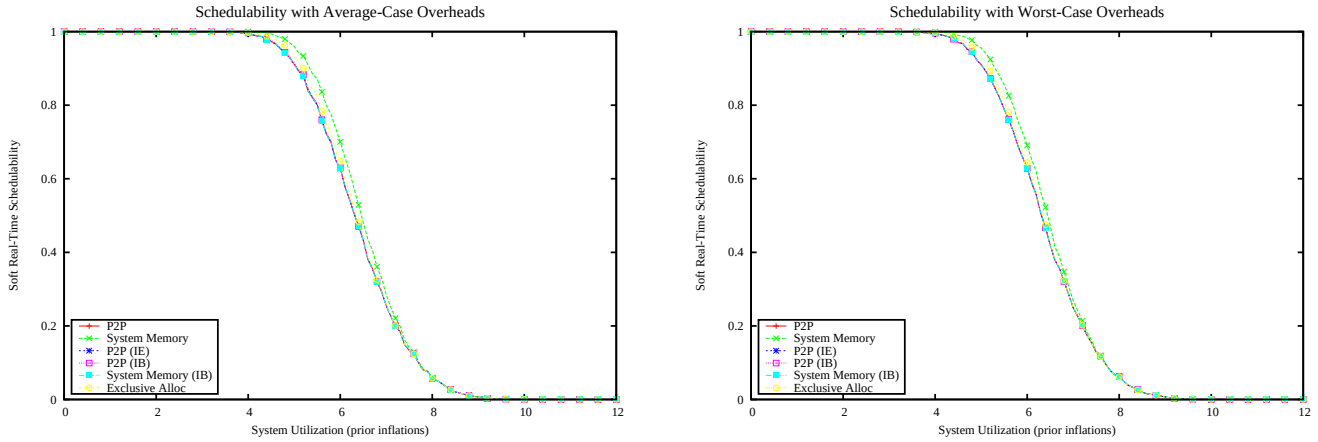

Figure 756: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

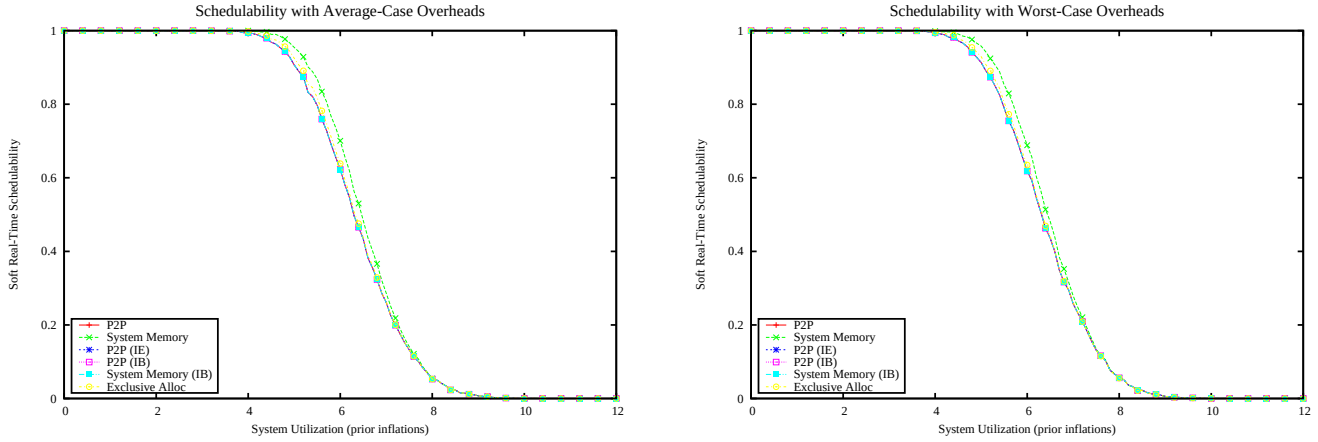

Figure 757: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

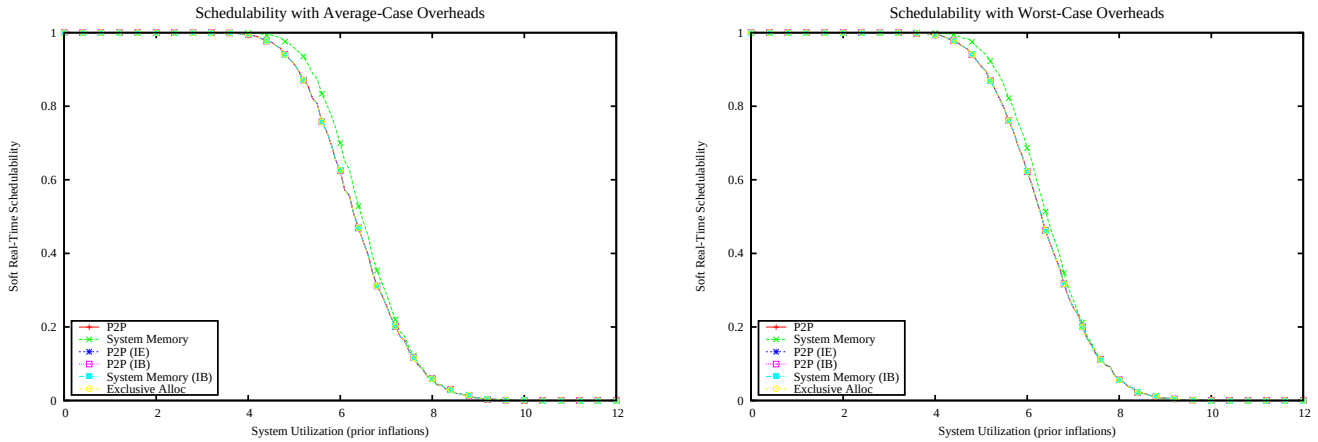

Figure 758: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

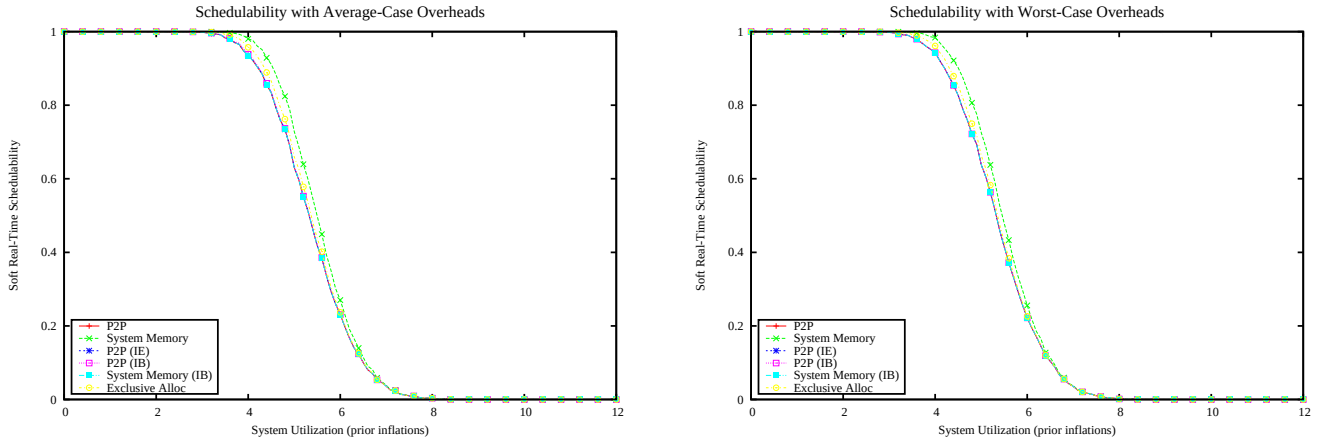

Figure 759: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

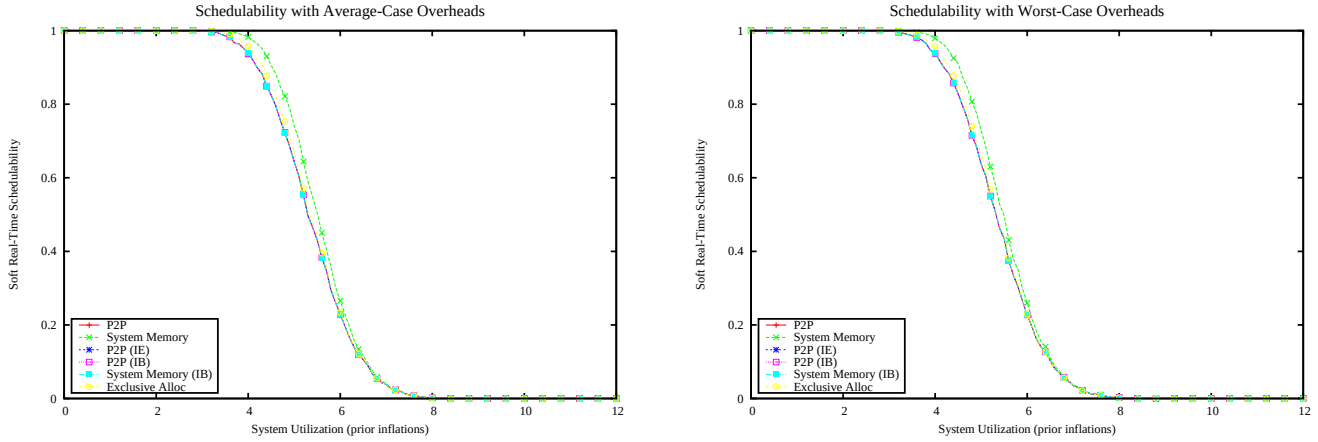

Figure 760: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

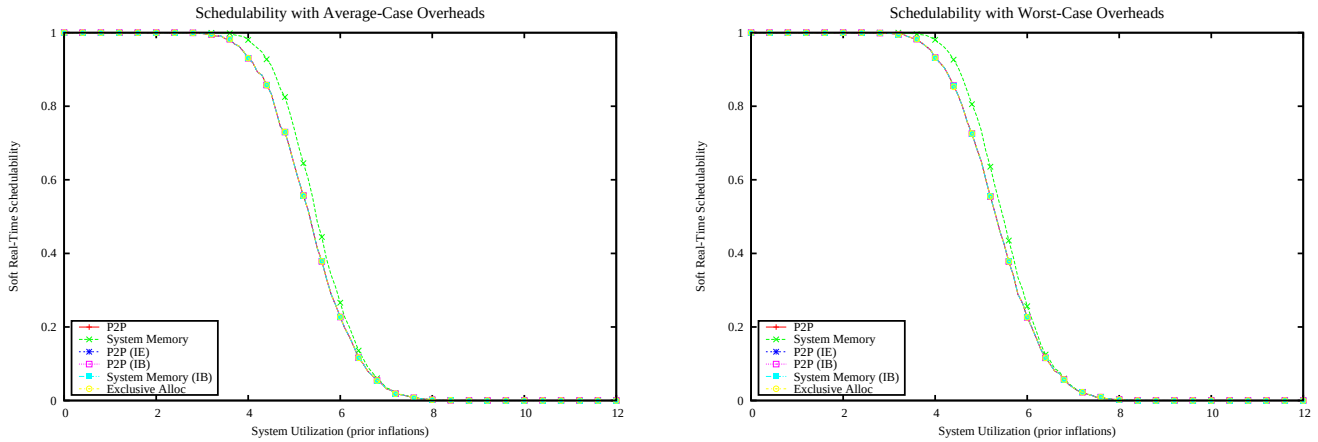

Figure 761: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

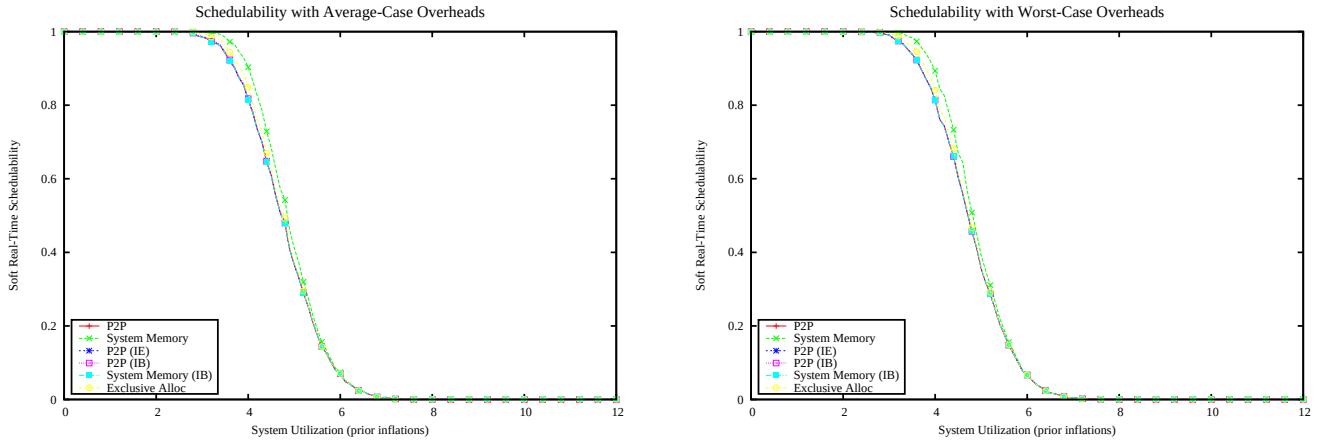

Figure 762: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

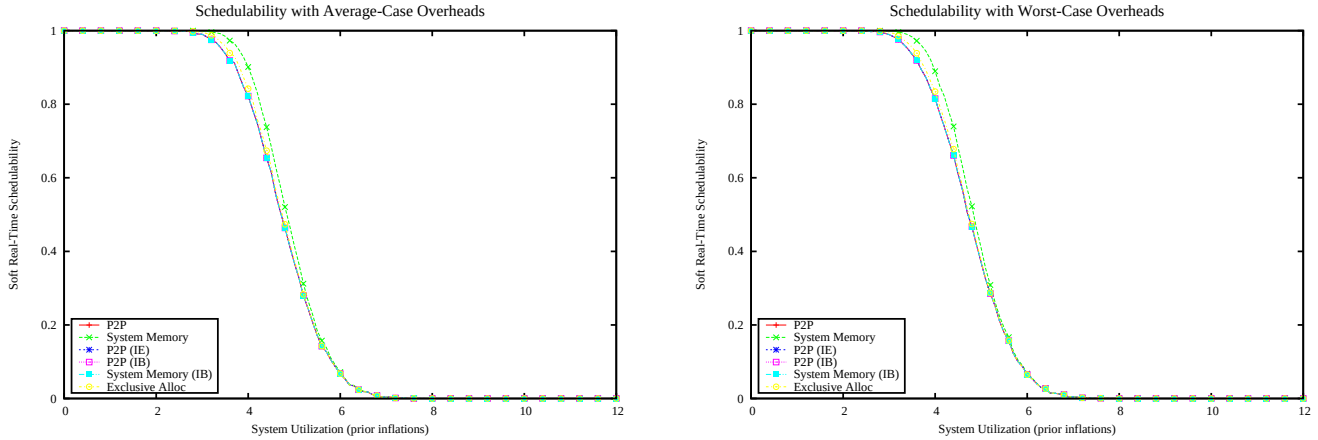

Figure 763: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

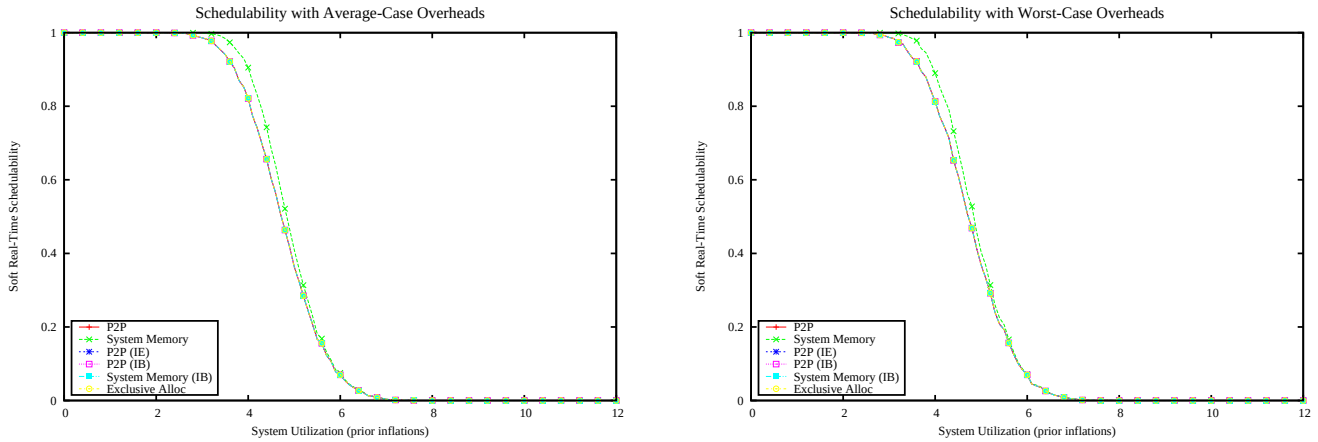

Figure 764: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

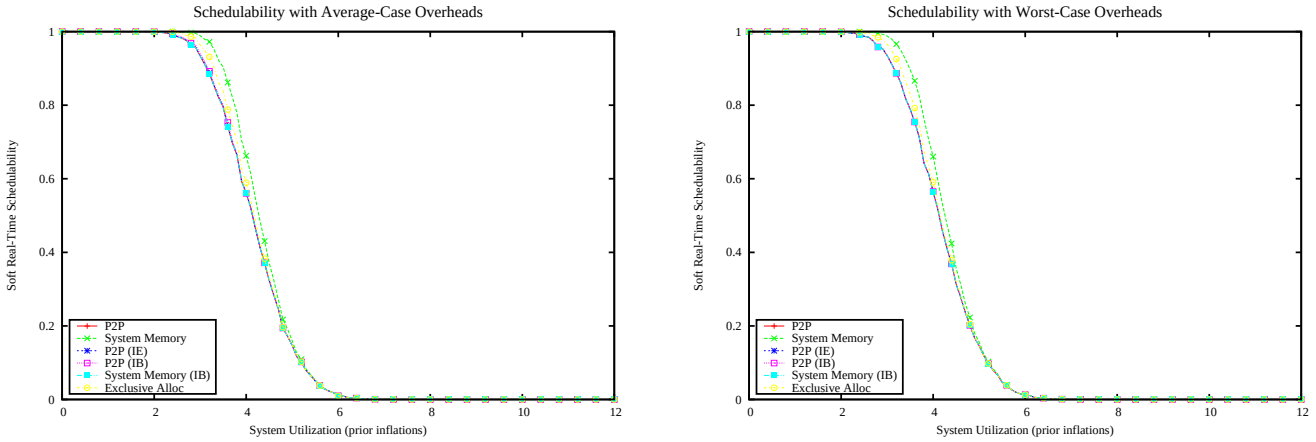

Figure 765: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

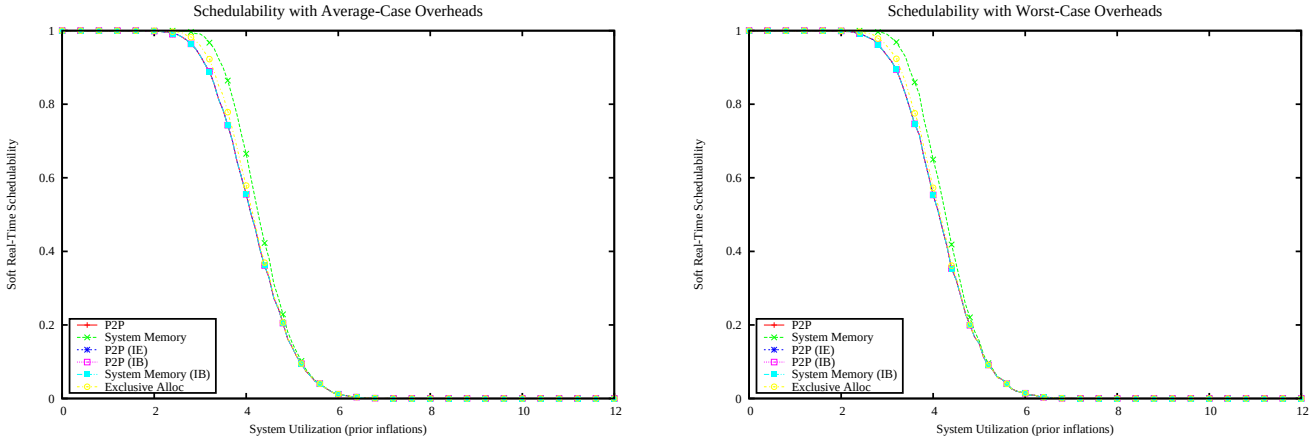

Figure 766: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

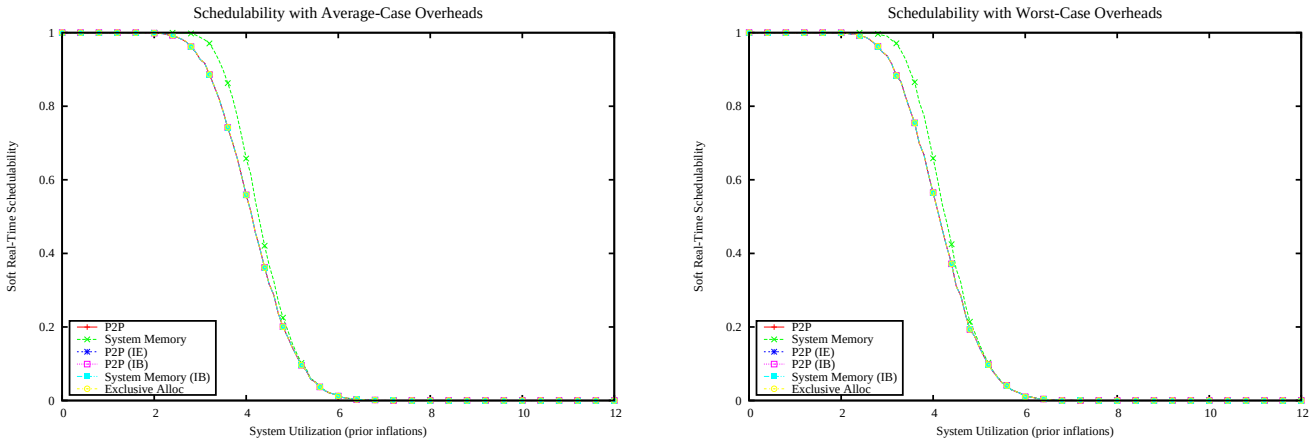

Figure 767: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

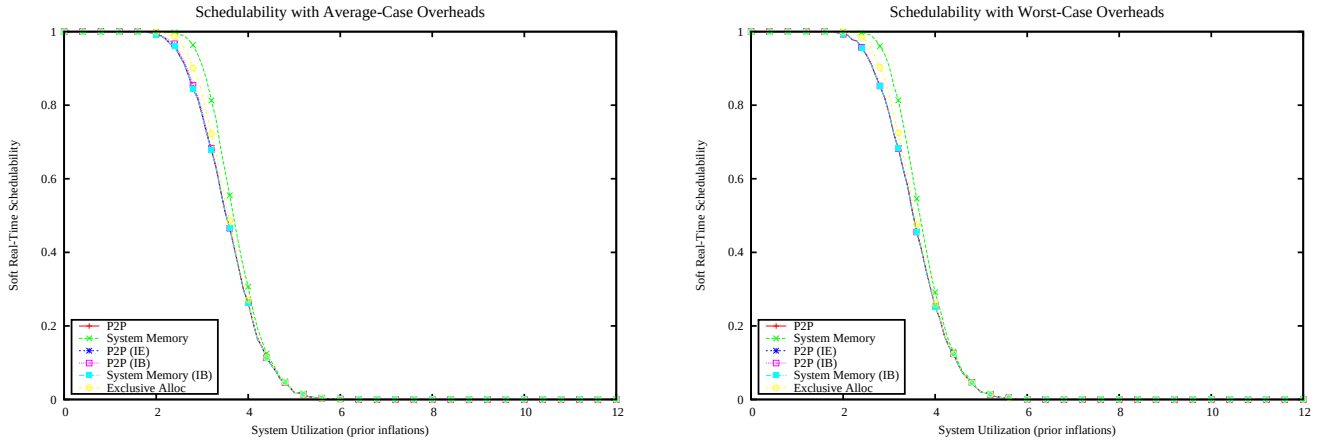

Figure 768: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

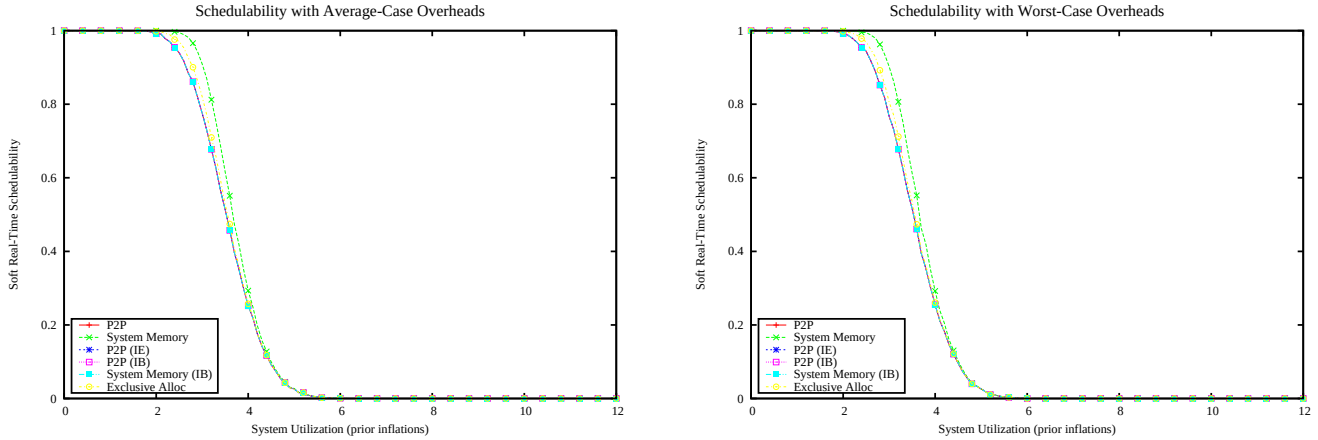

Figure 769: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

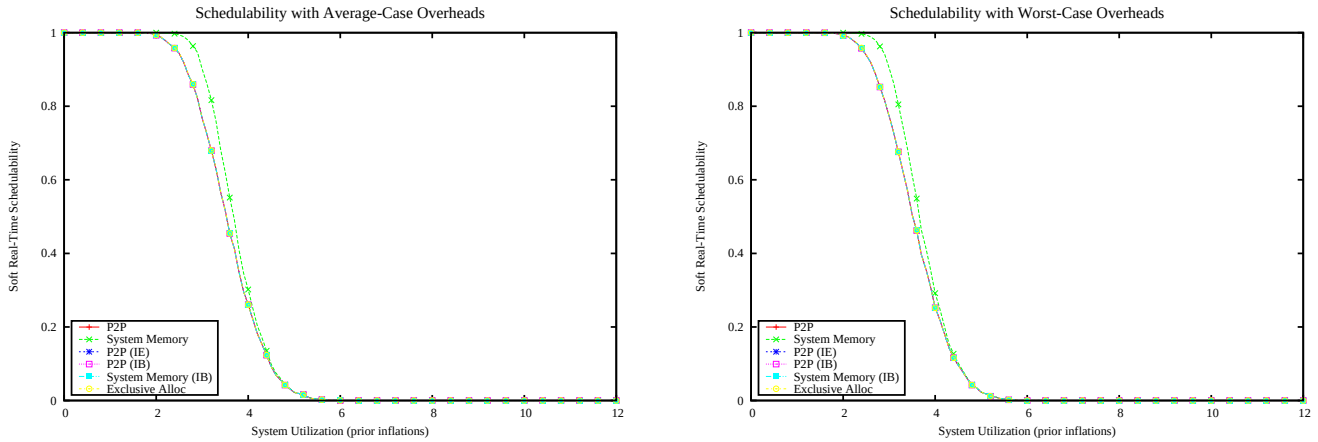

Figure 770: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

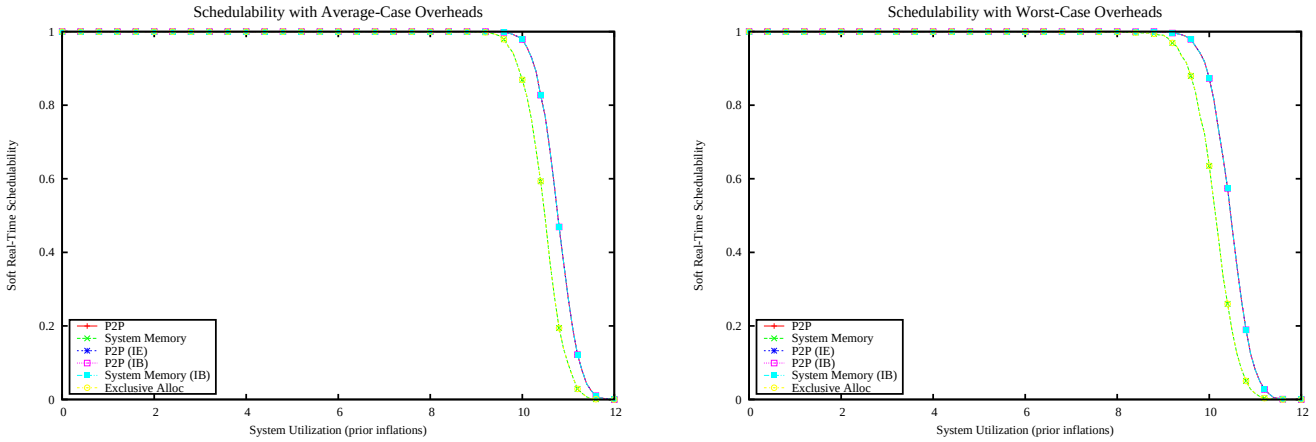

Figure 771: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

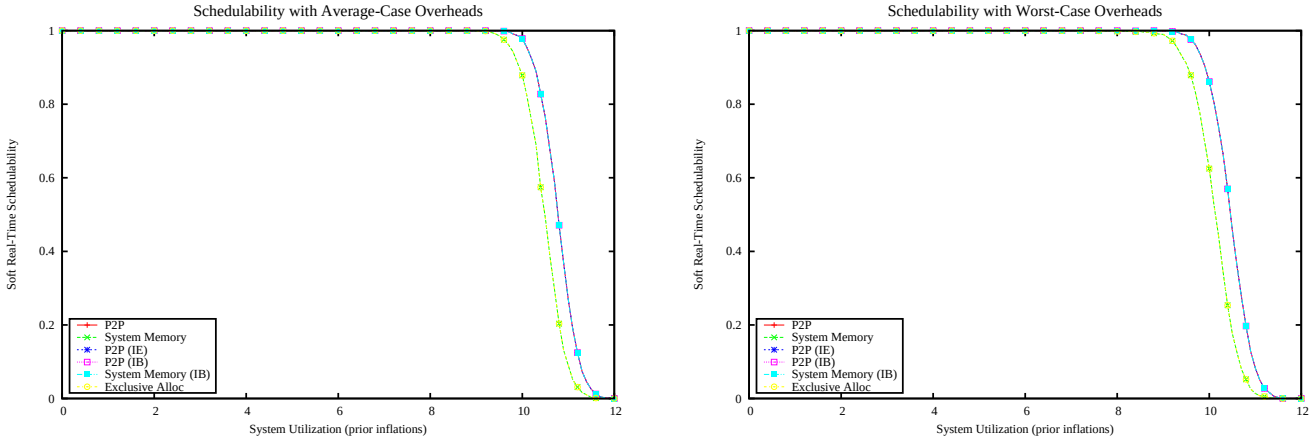

Figure 772: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

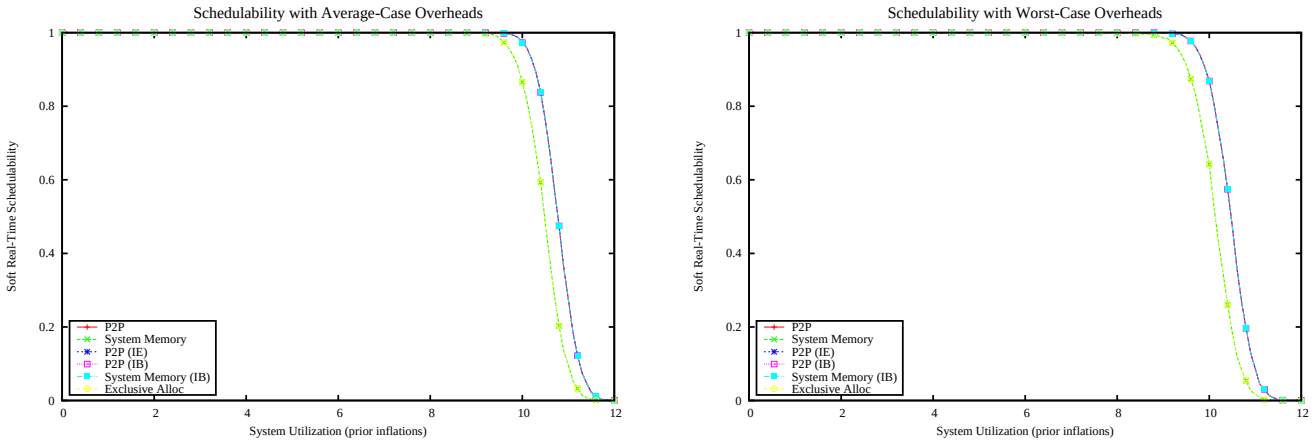

Figure 773: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

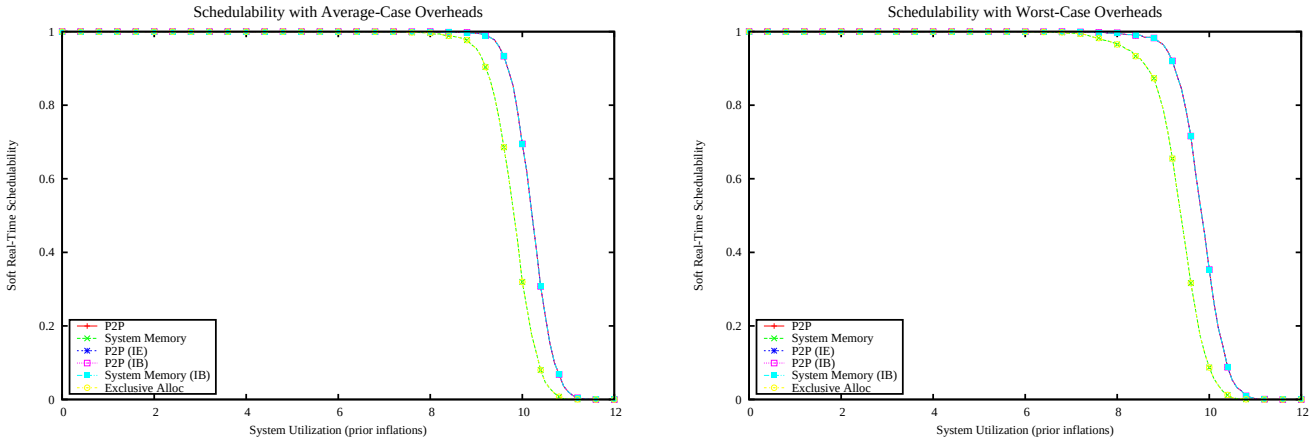

Figure 774: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

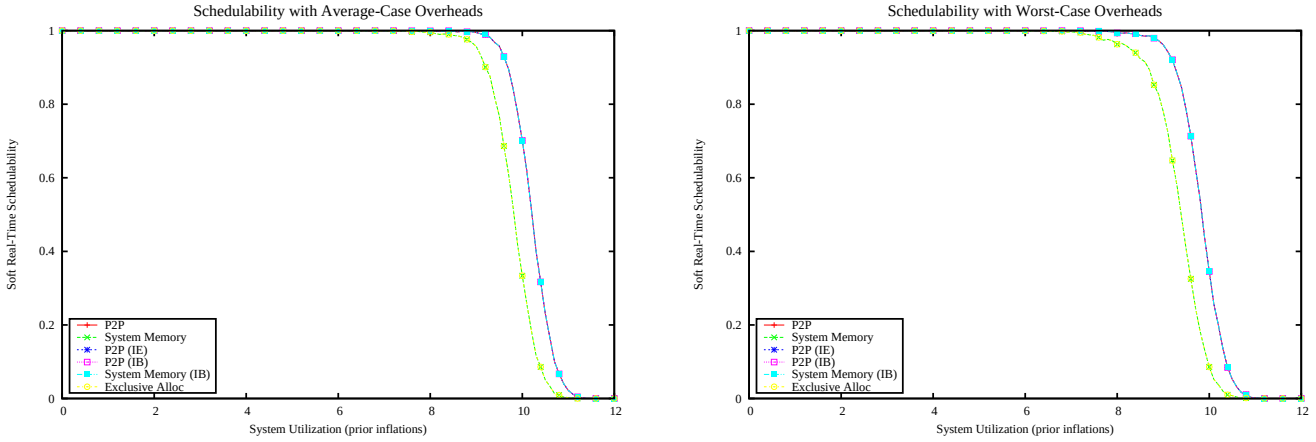

Figure 775: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

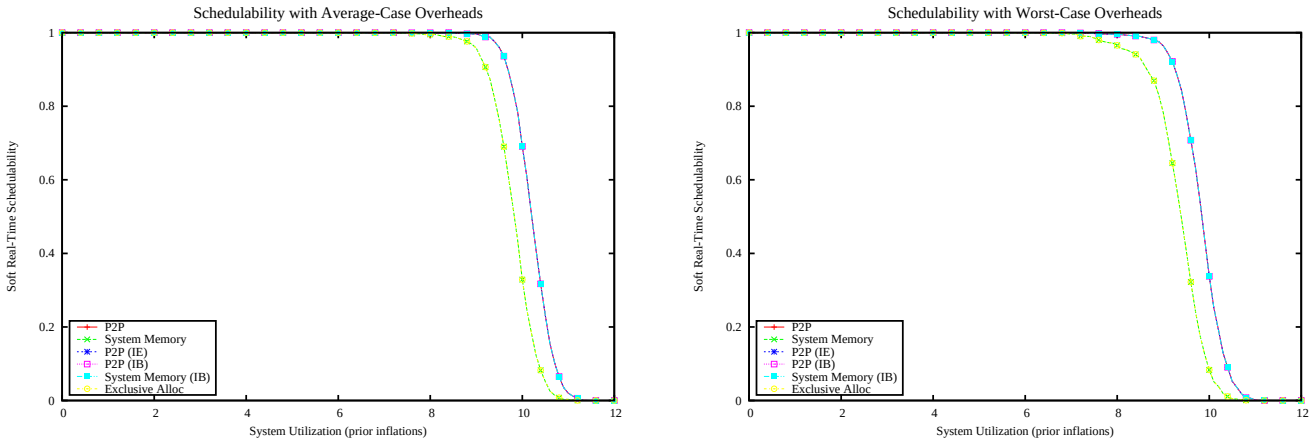

Figure 776: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

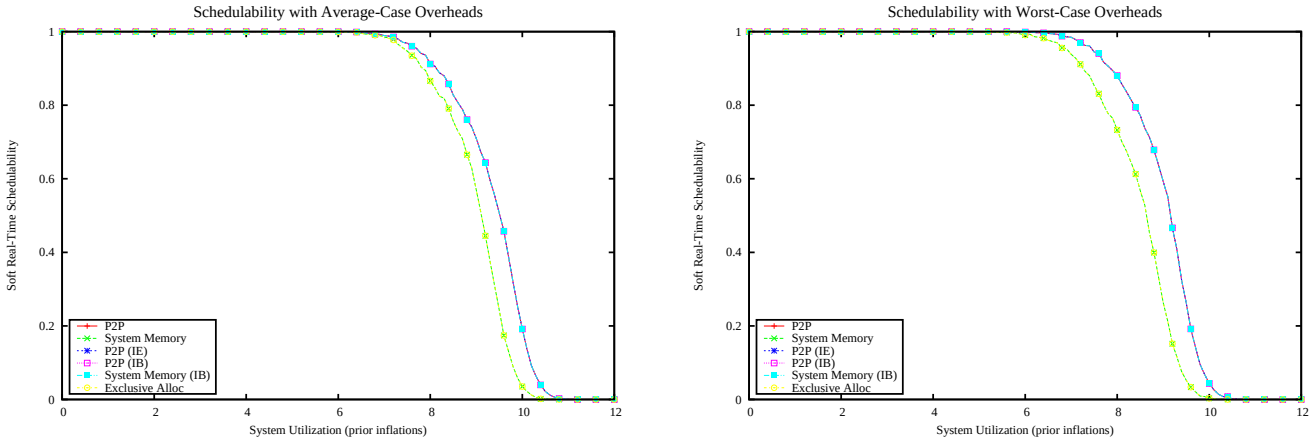

Figure 777: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

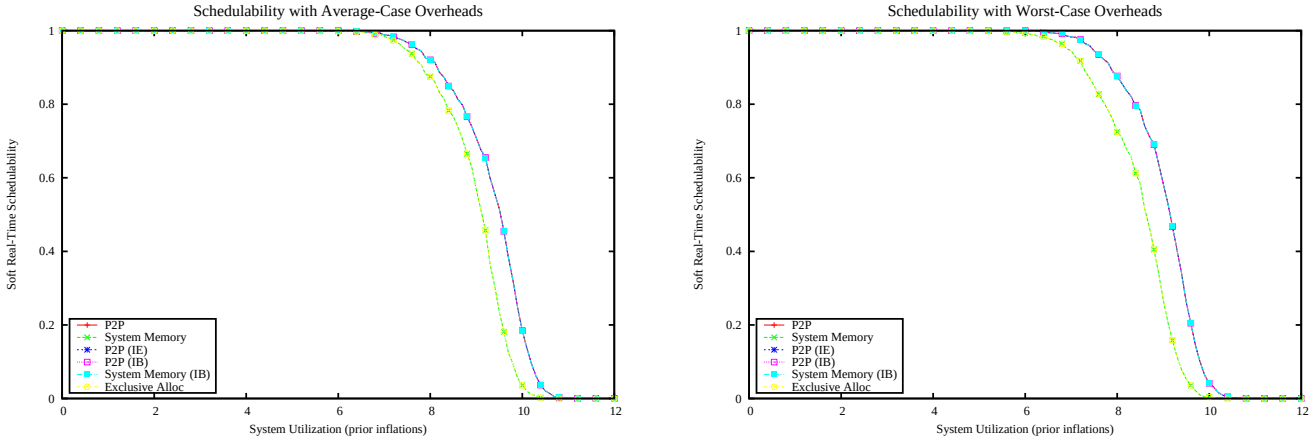

Figure 778: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

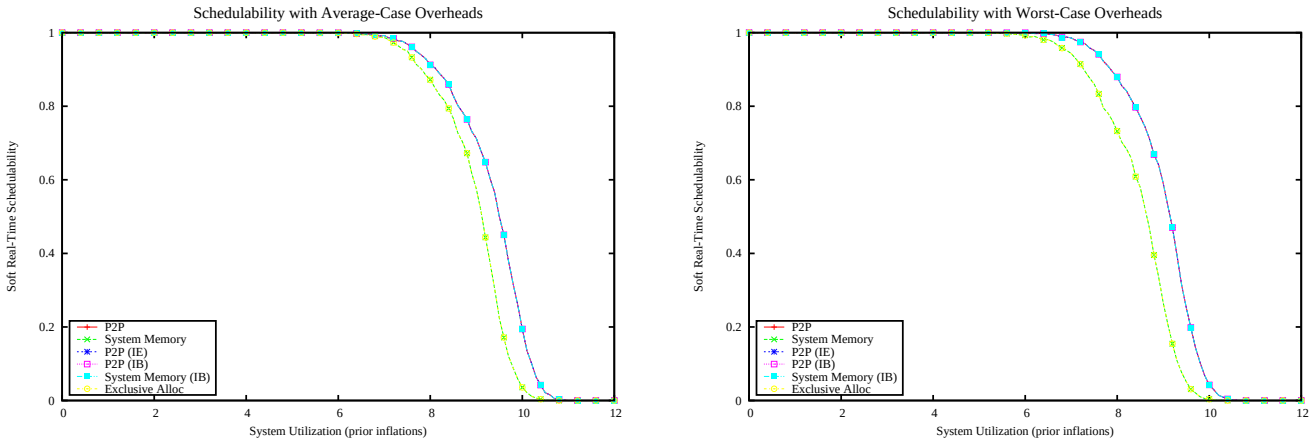

Figure 779: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

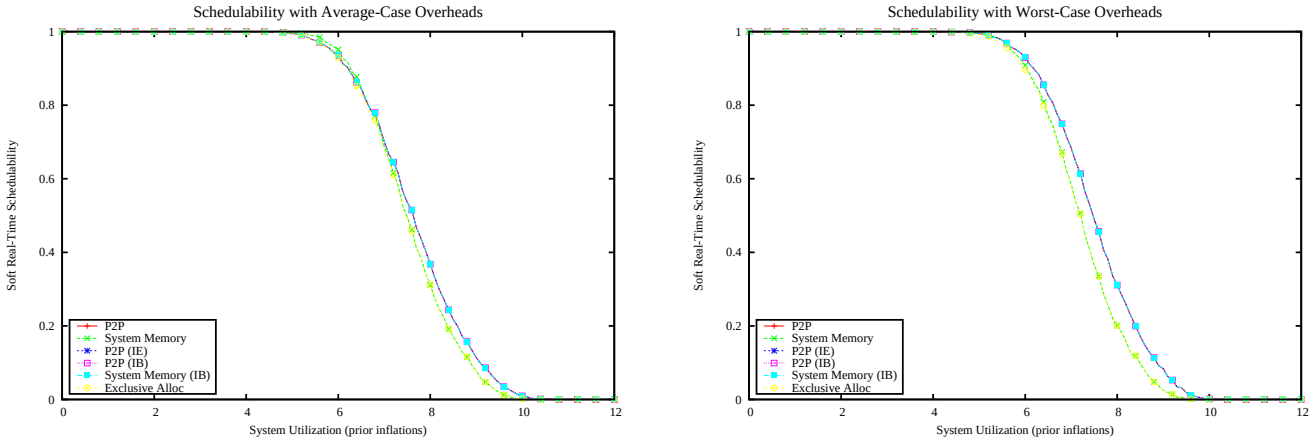

Figure 780: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

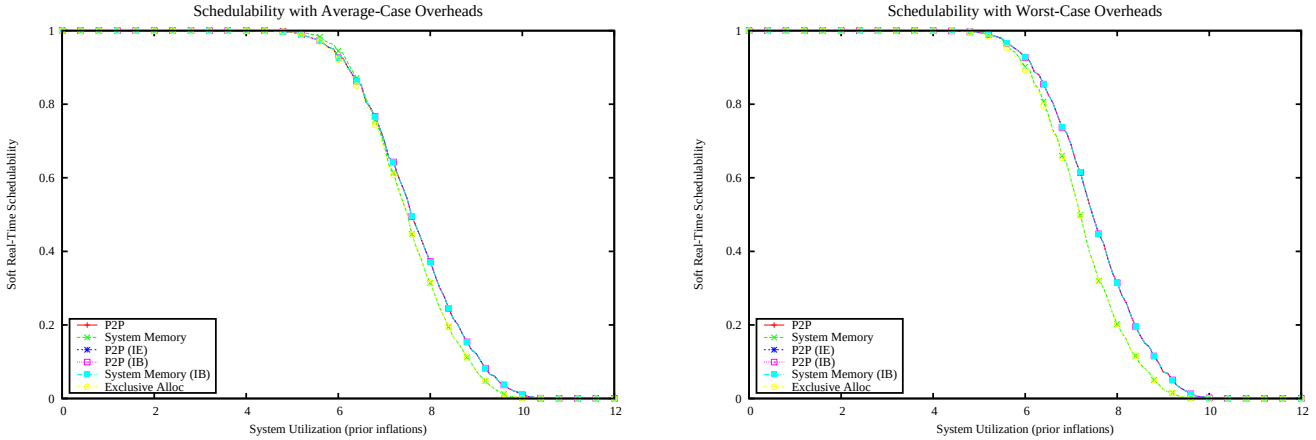

Figure 781: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

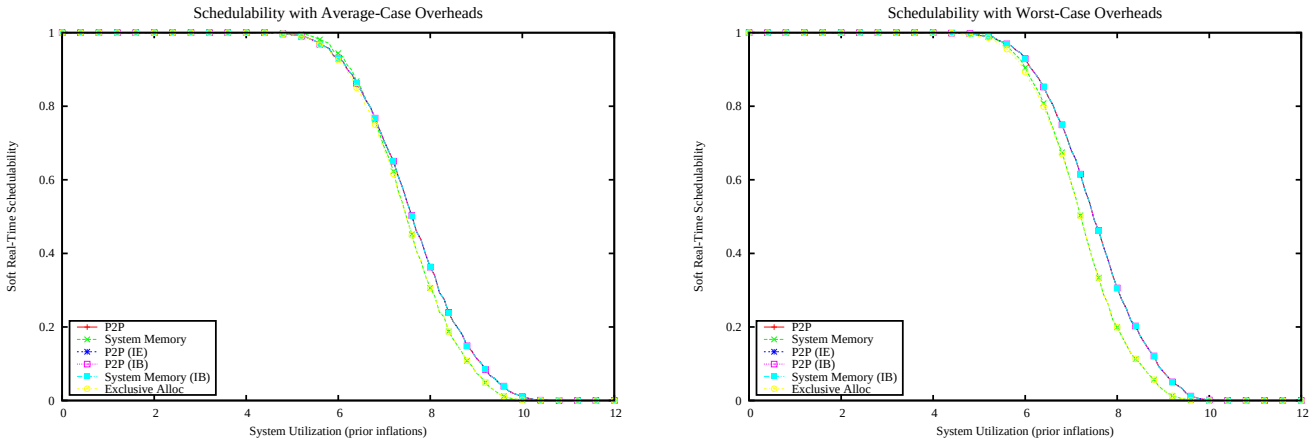

Figure 782: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

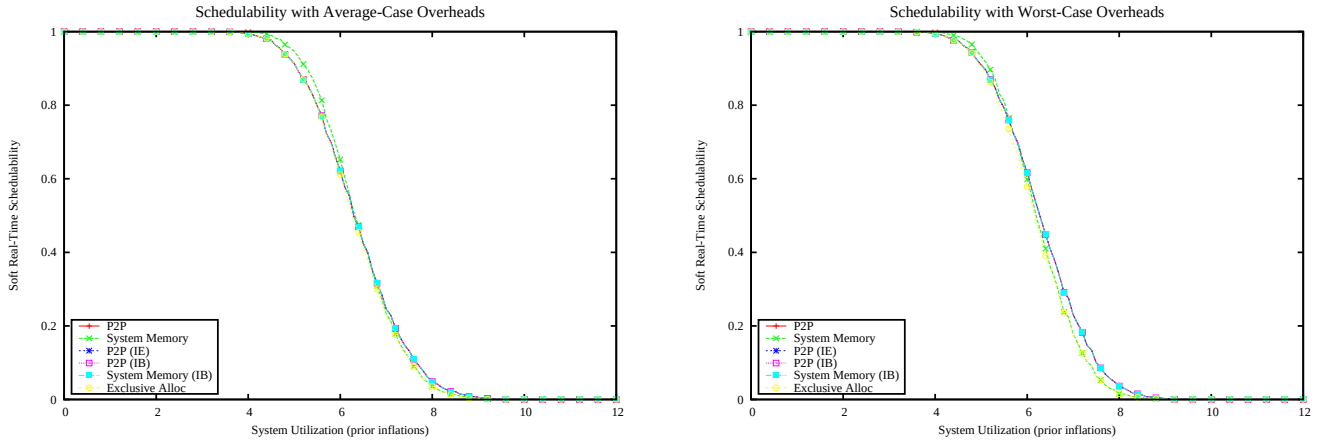

Figure 783: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

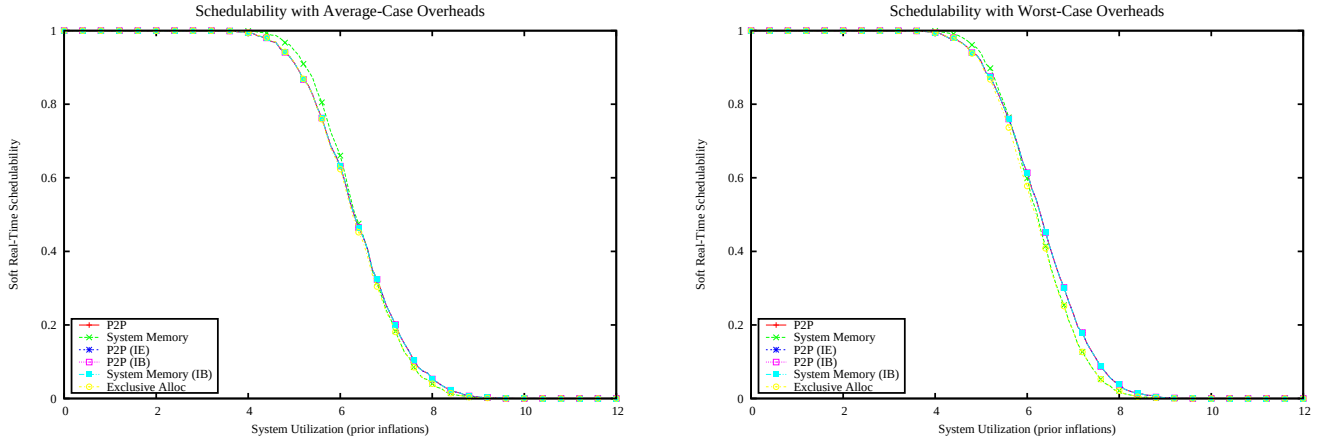

Figure 784: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

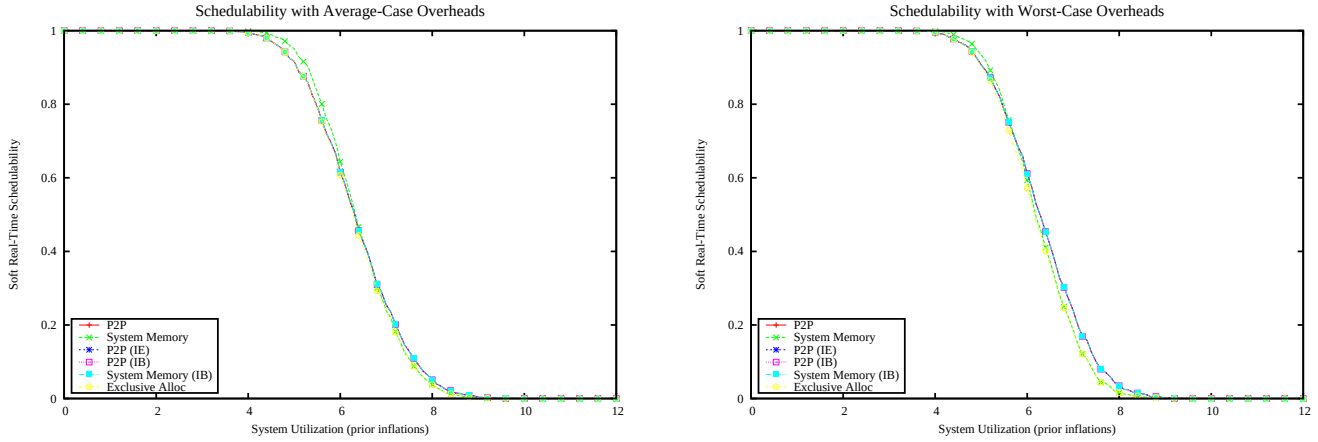

Figure 785: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

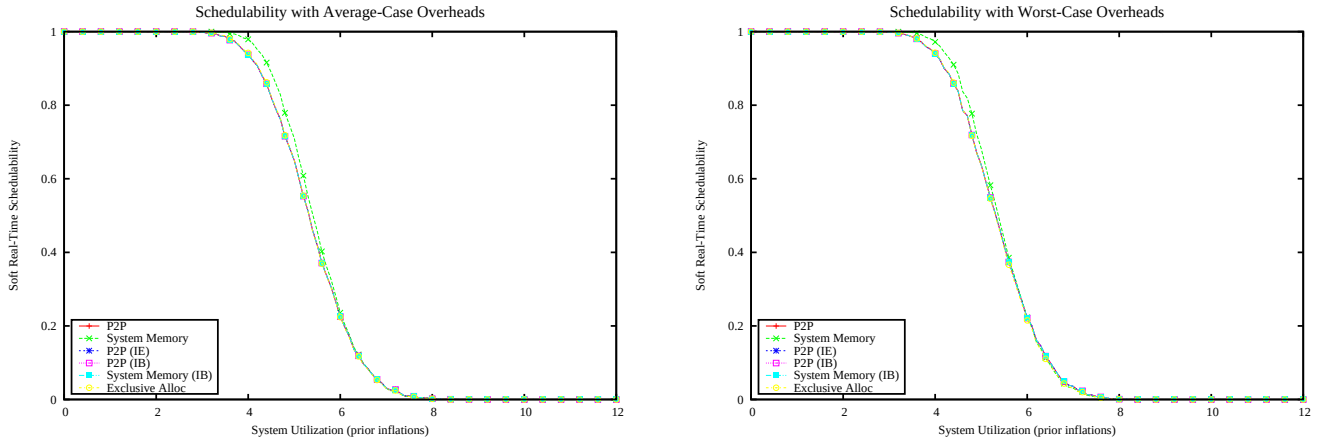

Figure 786: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

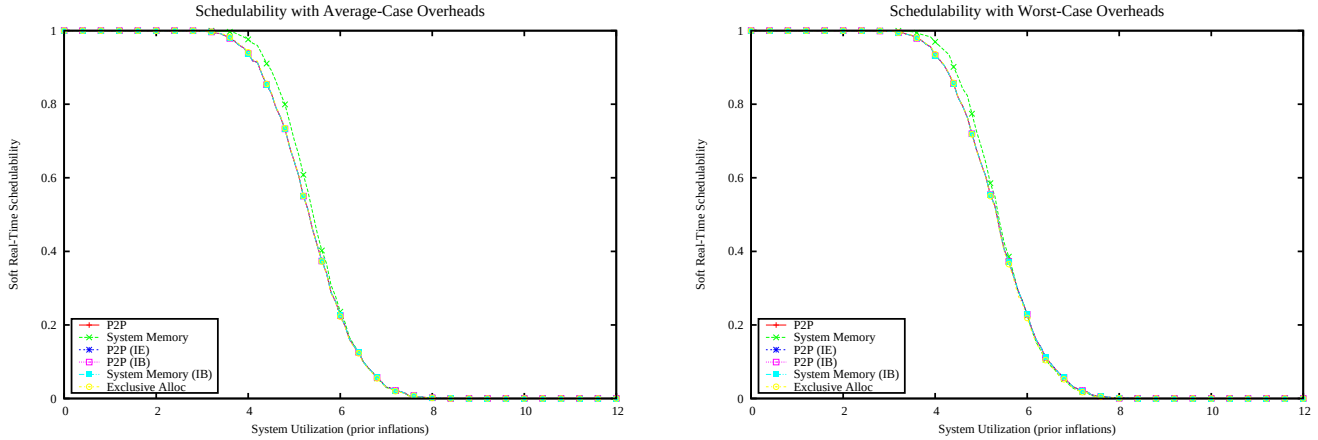

Figure 787: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

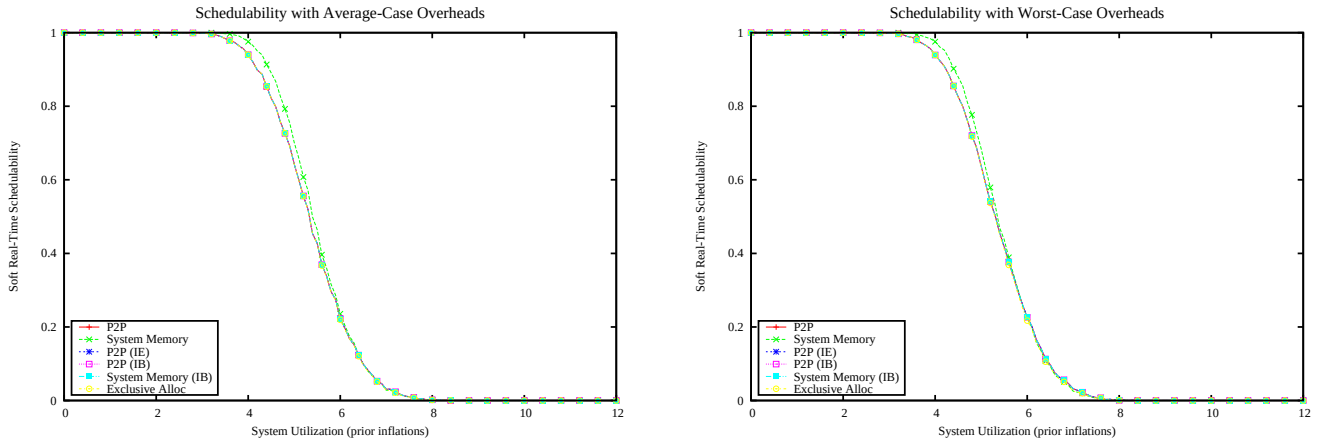

Figure 788: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

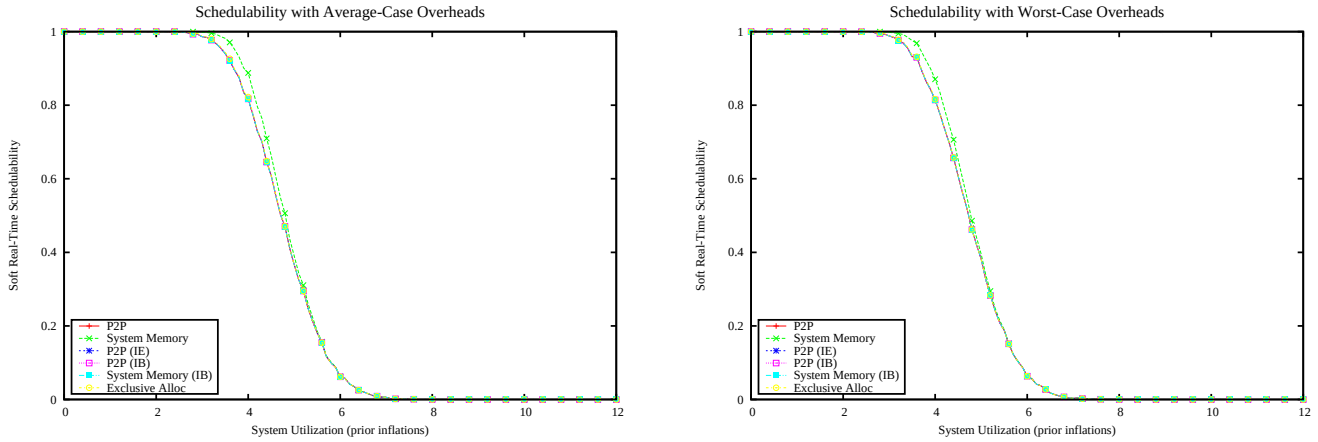

Figure 789: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

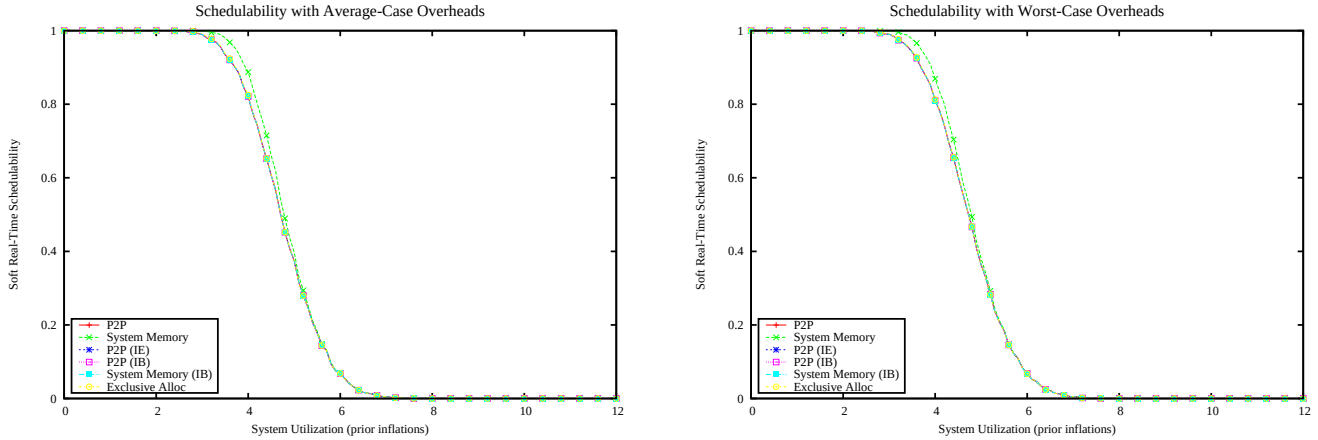

Figure 790: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

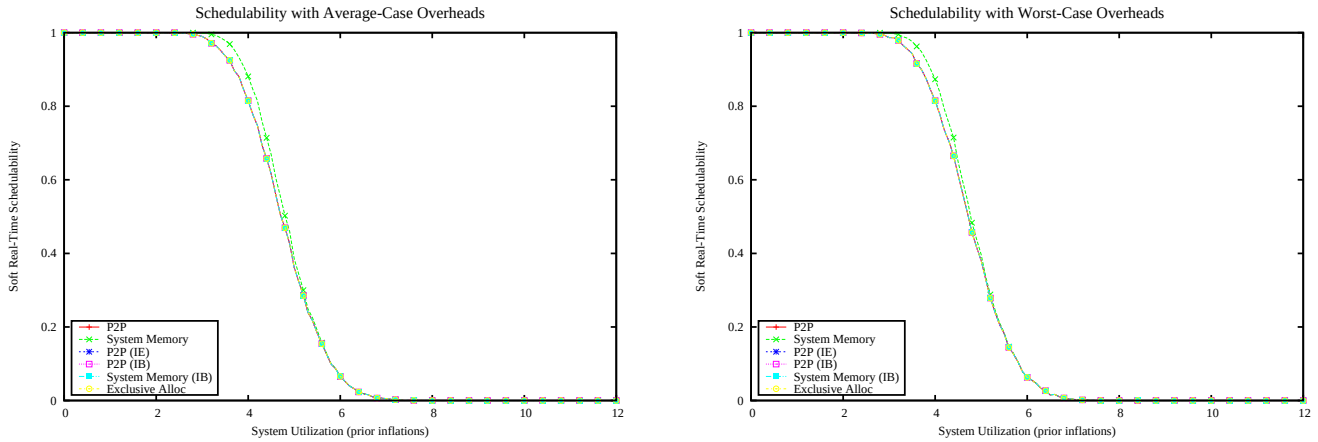

Figure 791: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

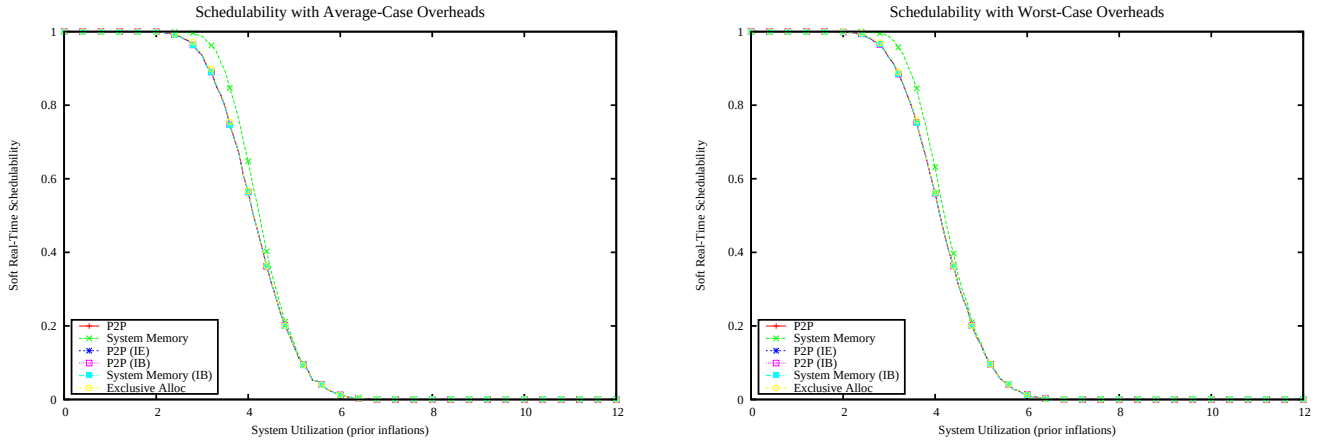

Figure 792: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

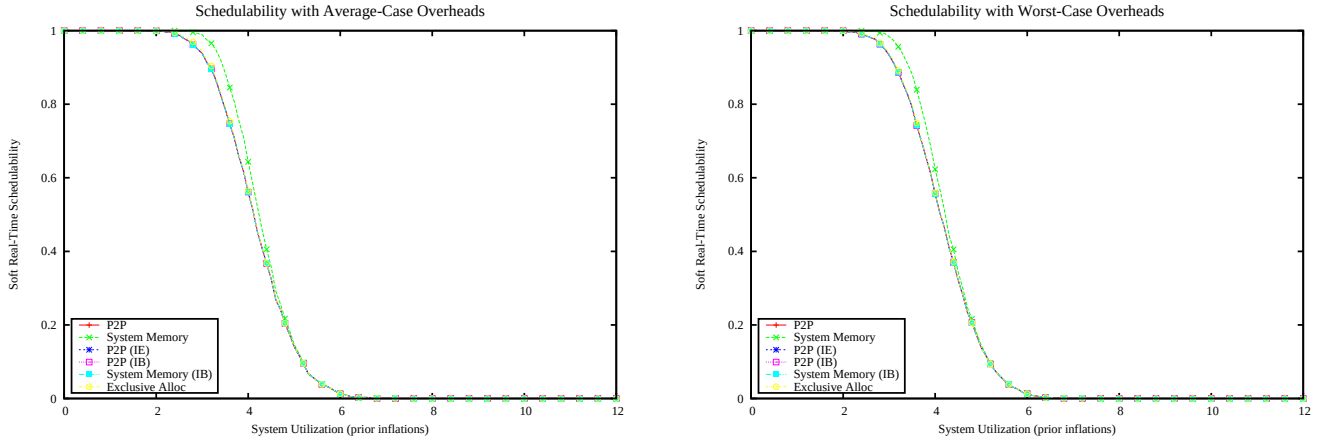

Figure 793: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

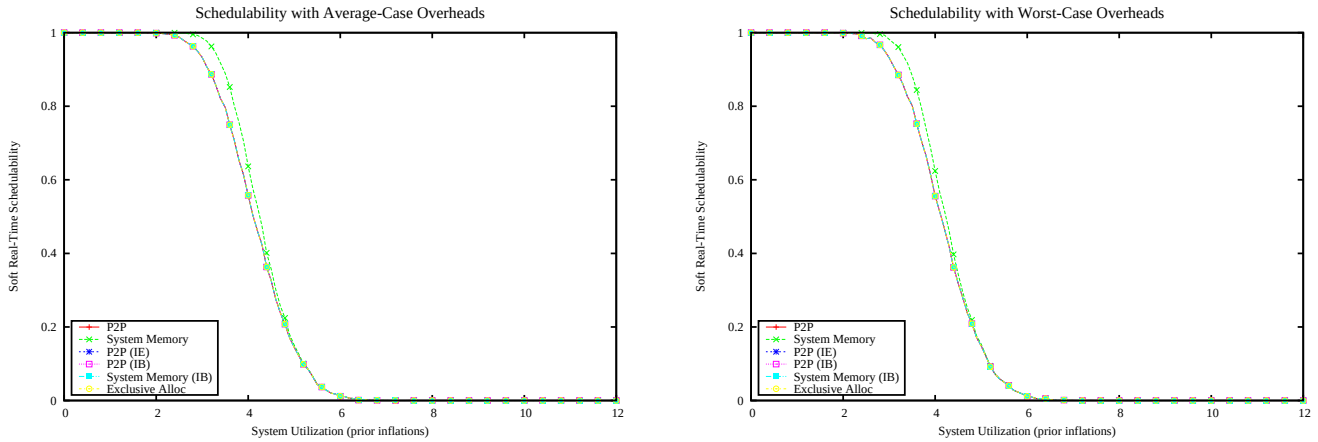

Figure 794: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

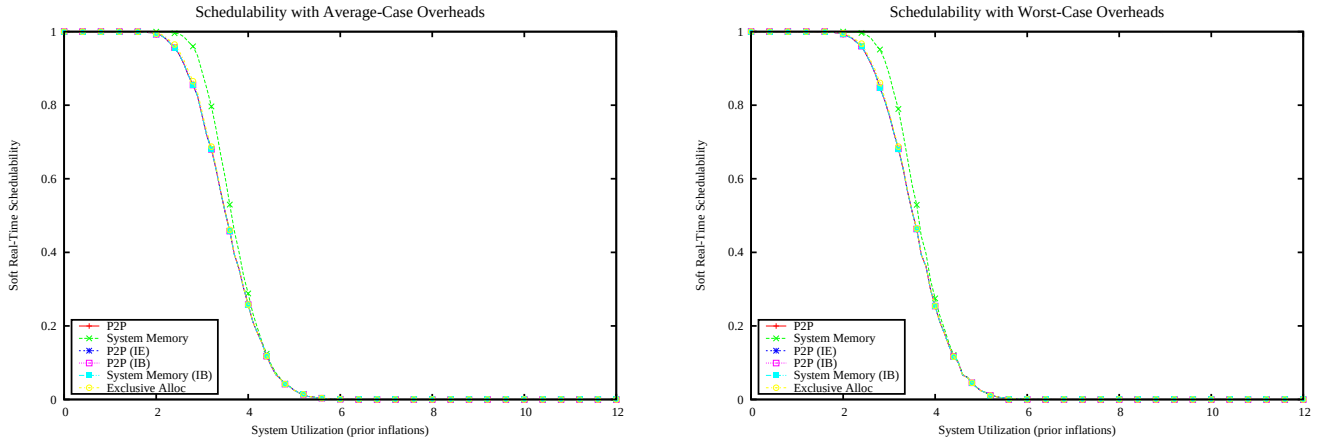

Figure 795: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

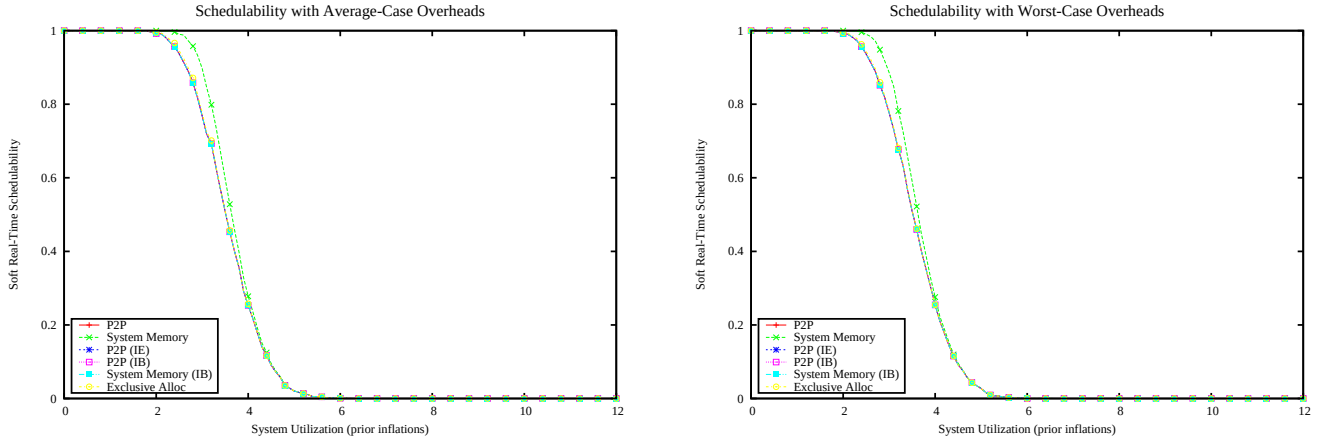

Figure 796: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

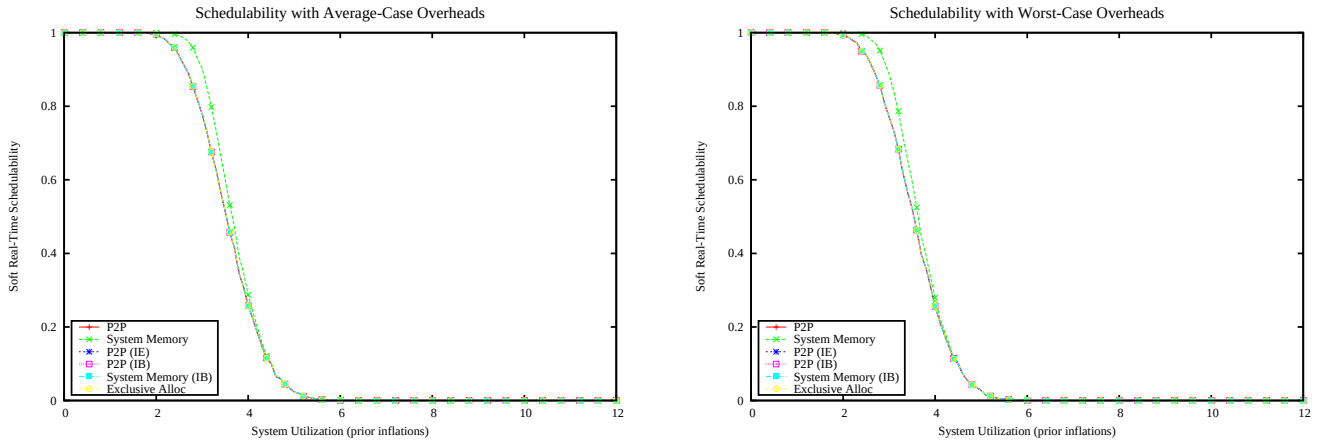

Figure 797: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

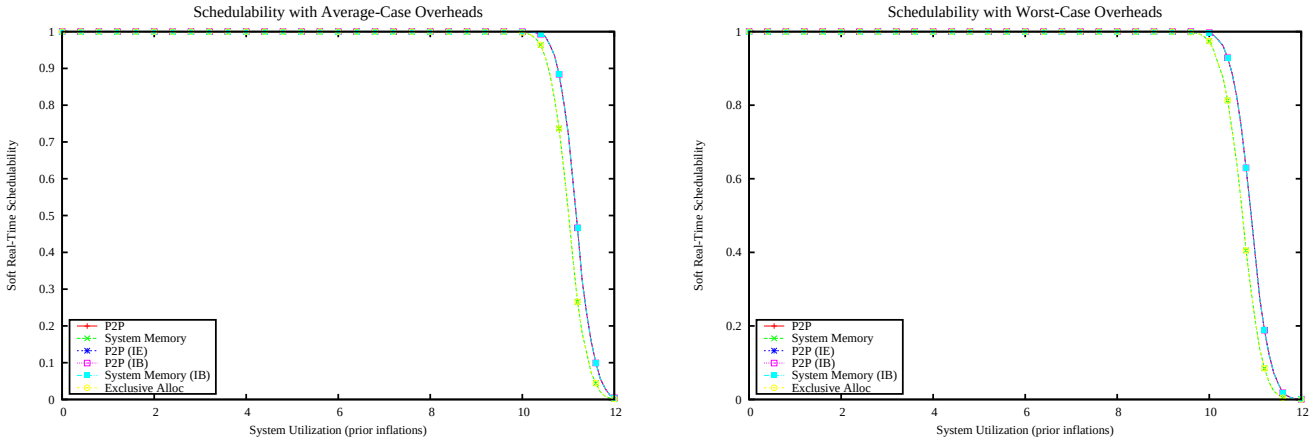

Figure 798: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

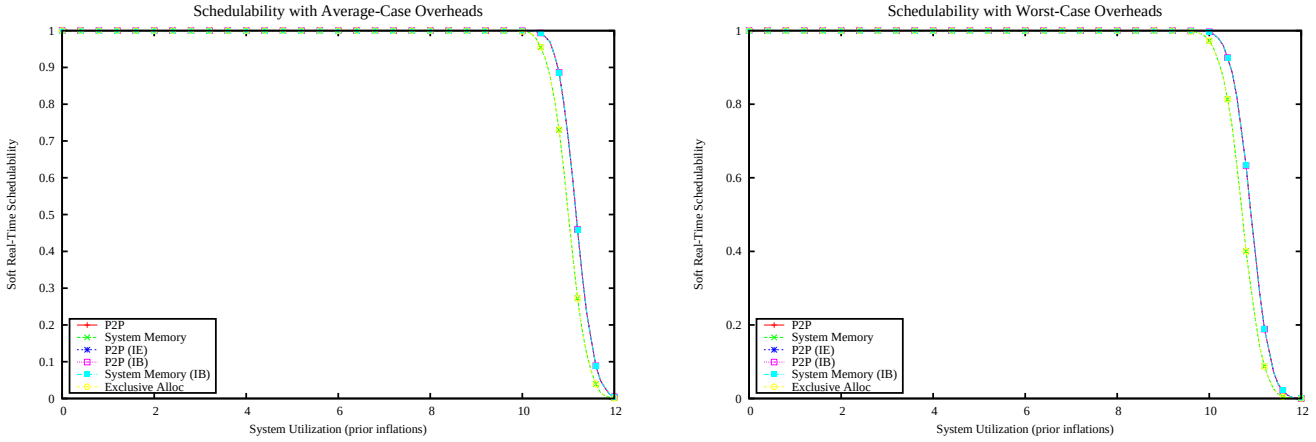

Figure 799: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

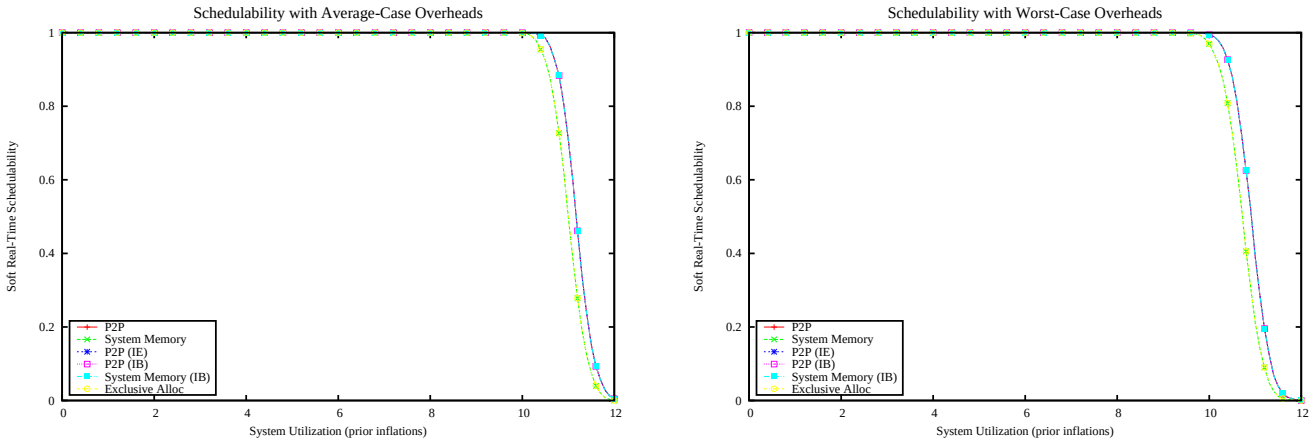

Figure 800: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

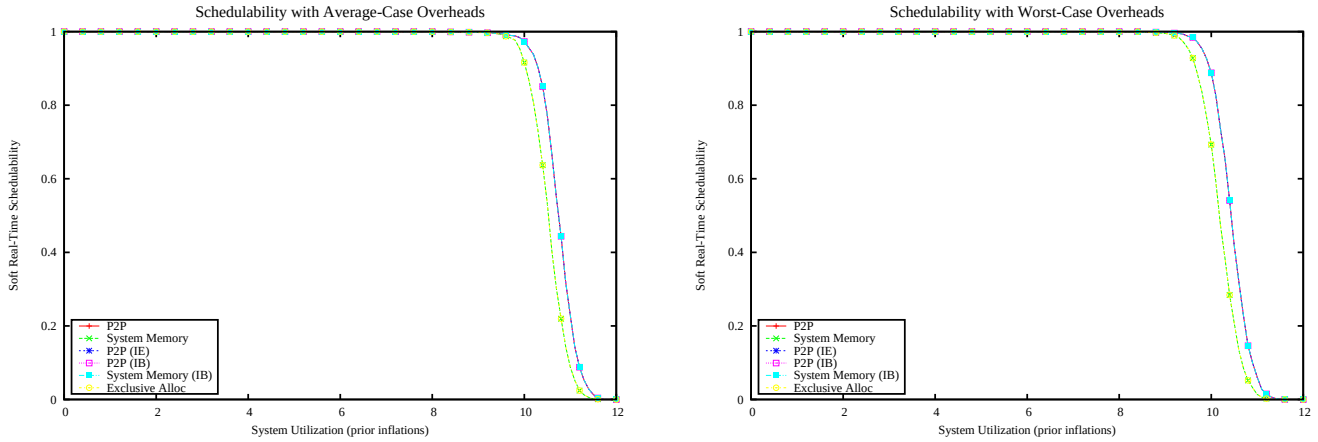

Figure 801: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

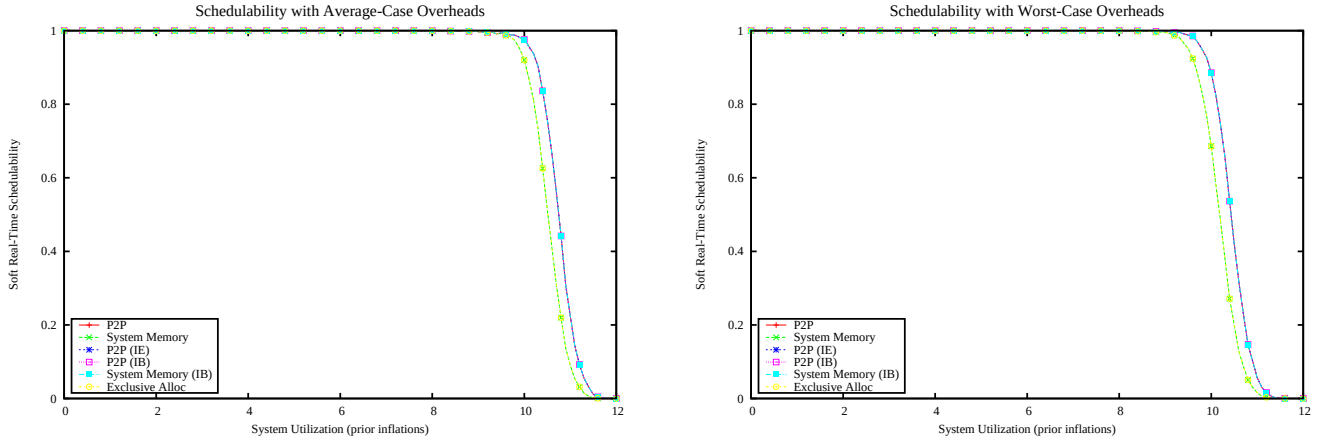

Figure 802: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

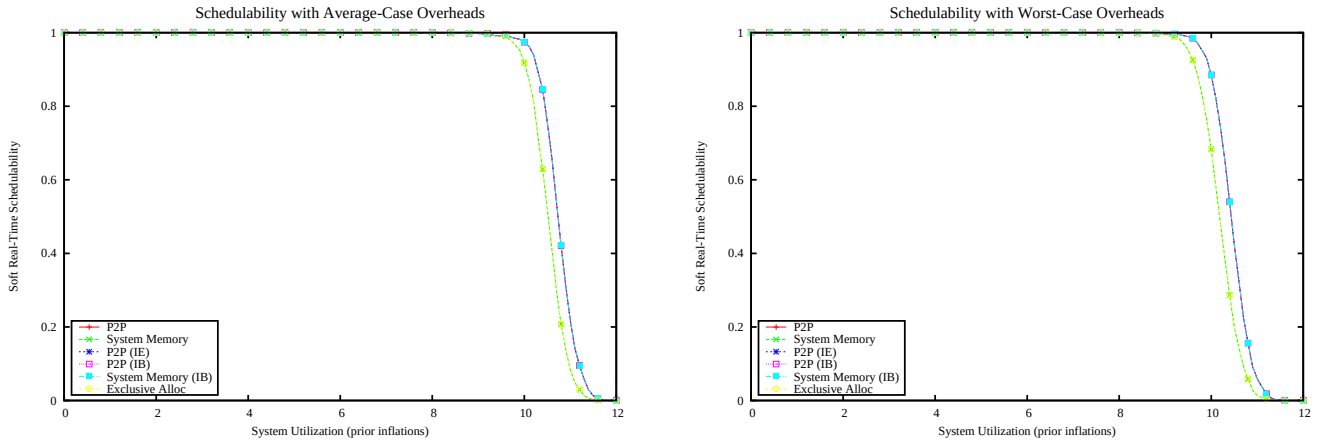

Figure 803: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

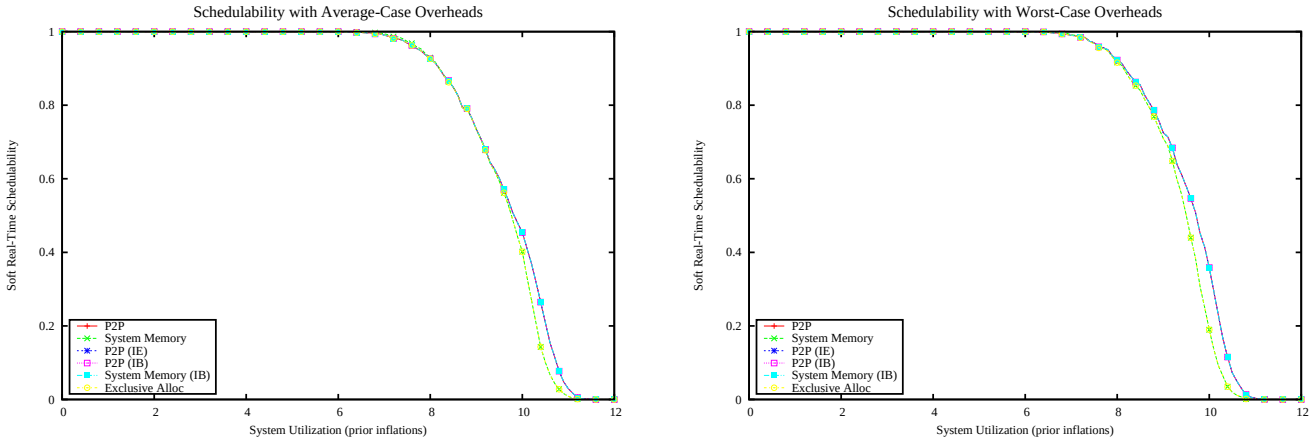

Figure 804: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

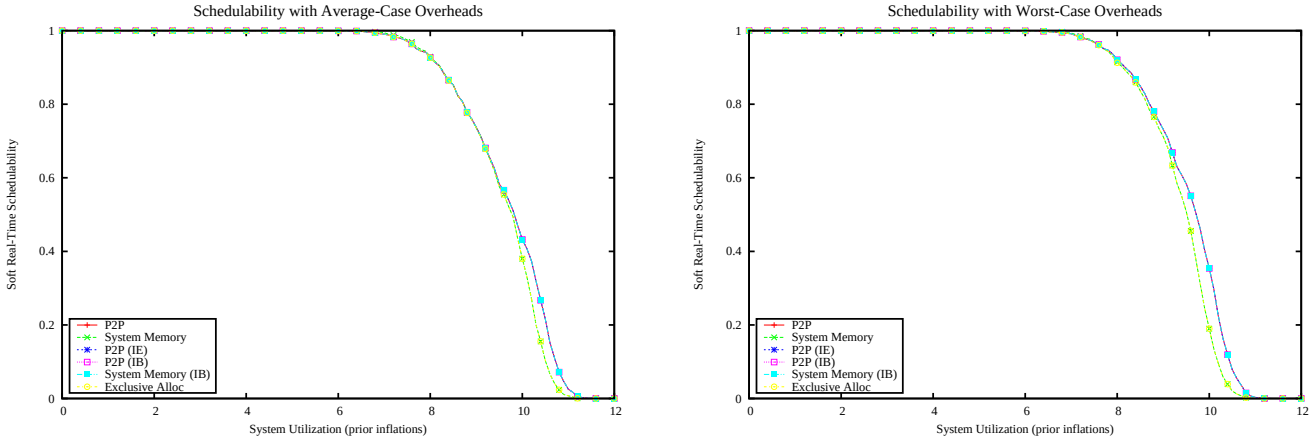

Figure 805: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

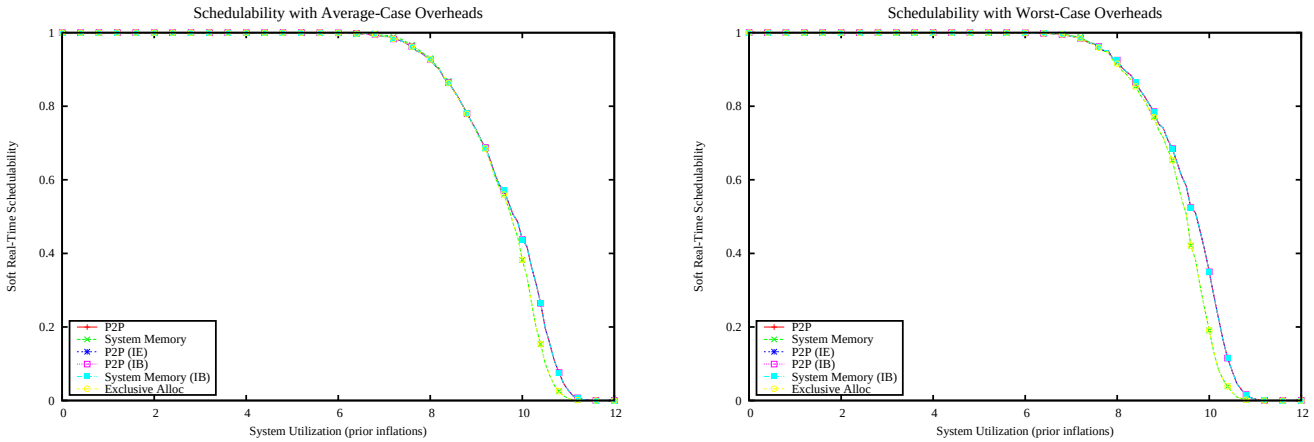

Figure 806: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

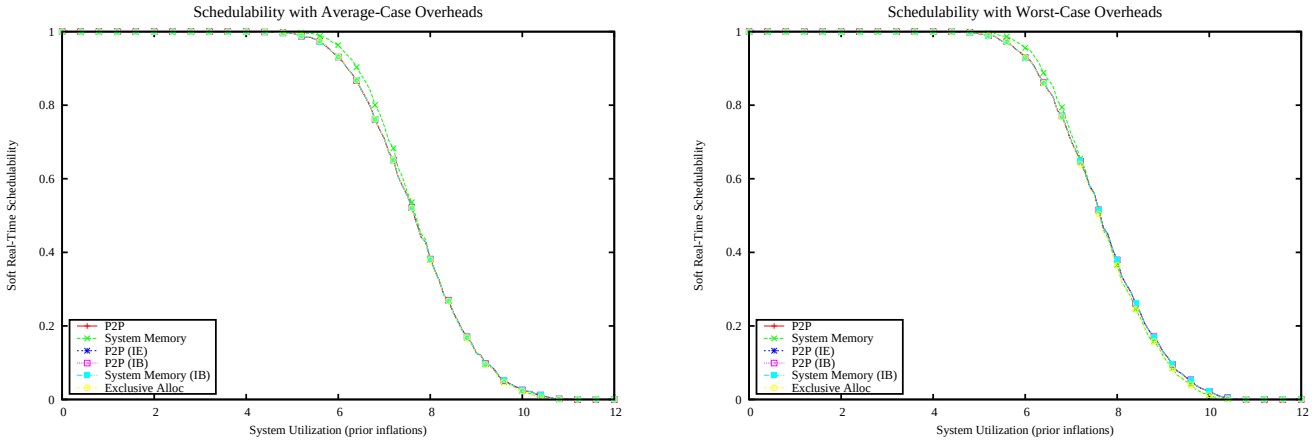

Figure 807: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

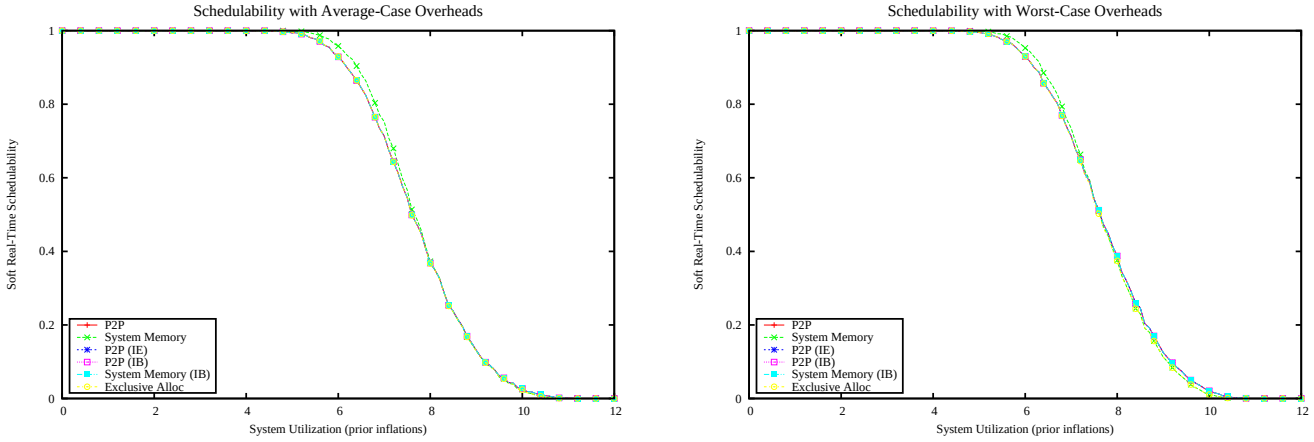

Figure 808: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

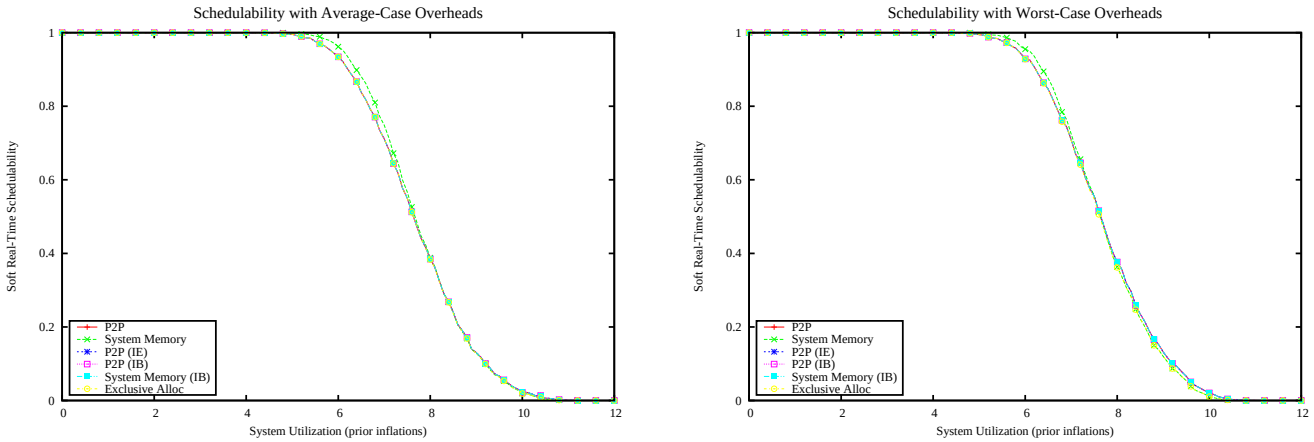

Figure 809: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

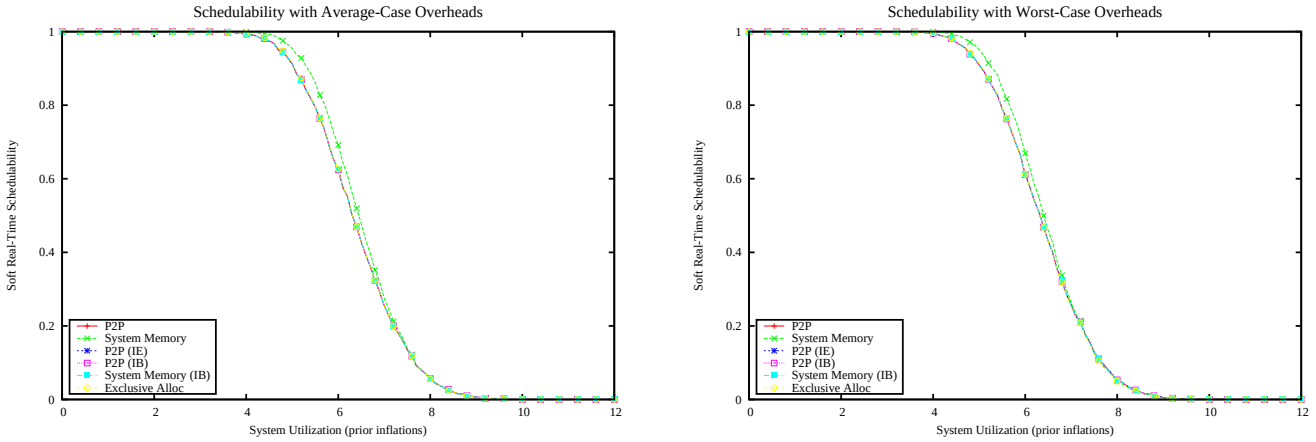

Figure 810: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

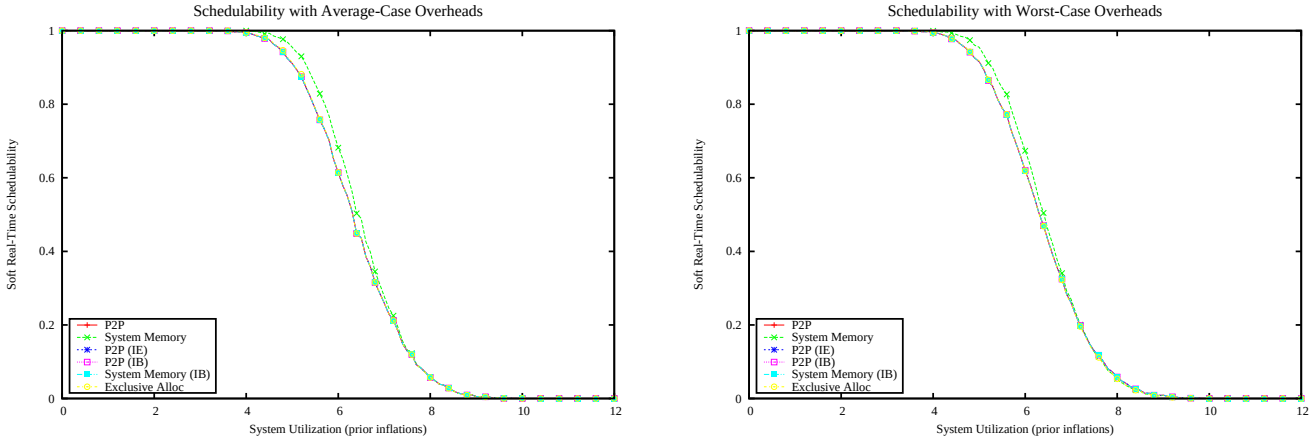

Figure 811: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

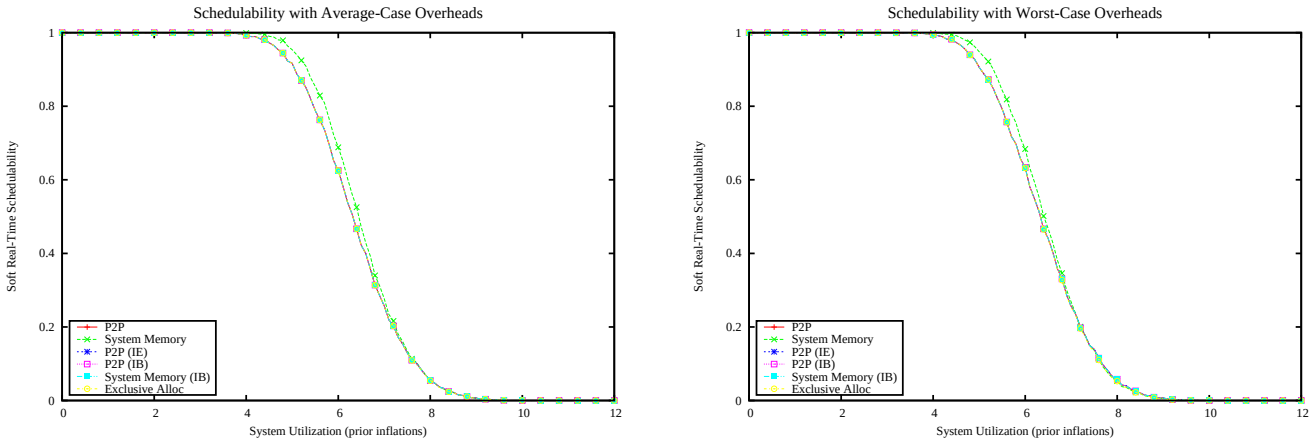

Figure 812: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

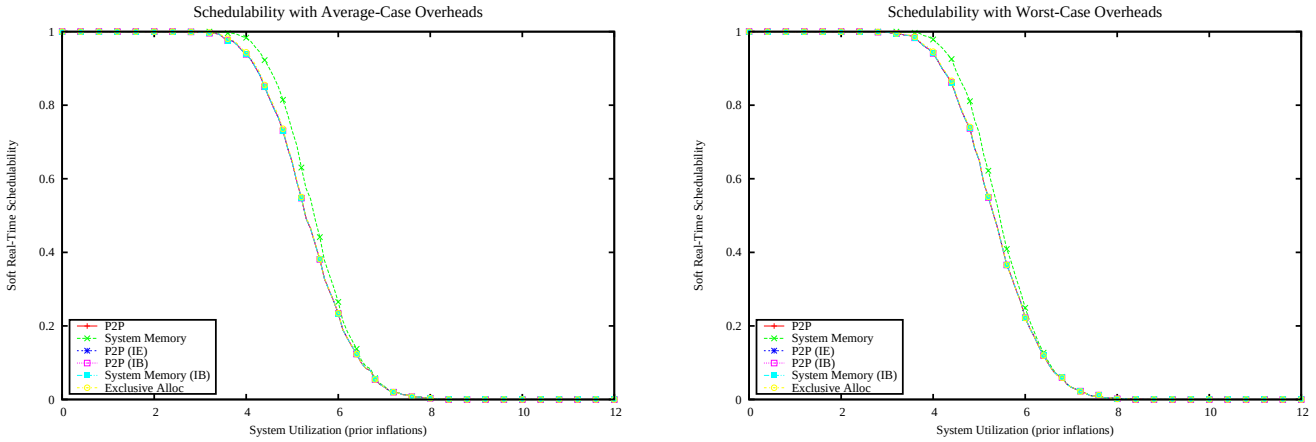

Figure 813: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

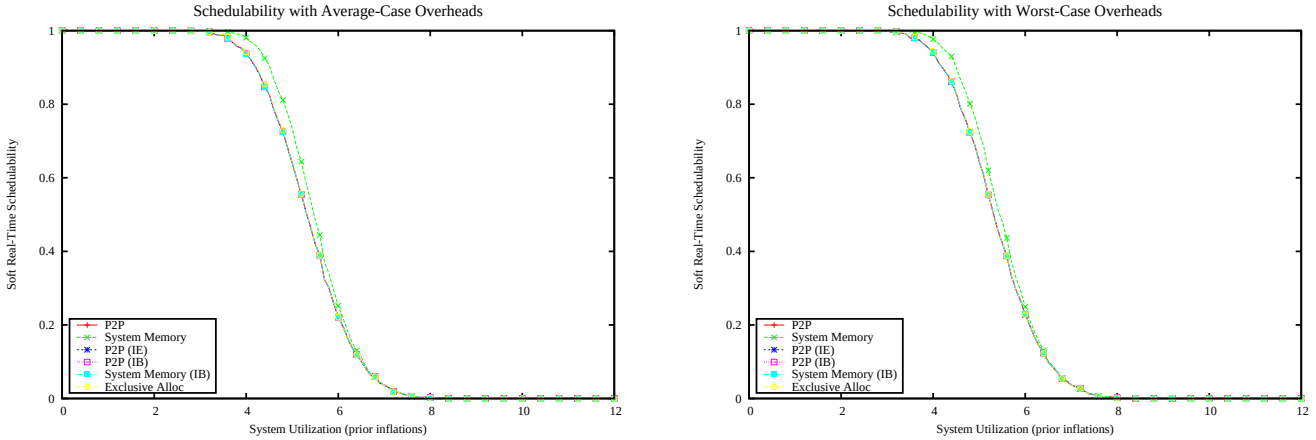

Figure 814: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

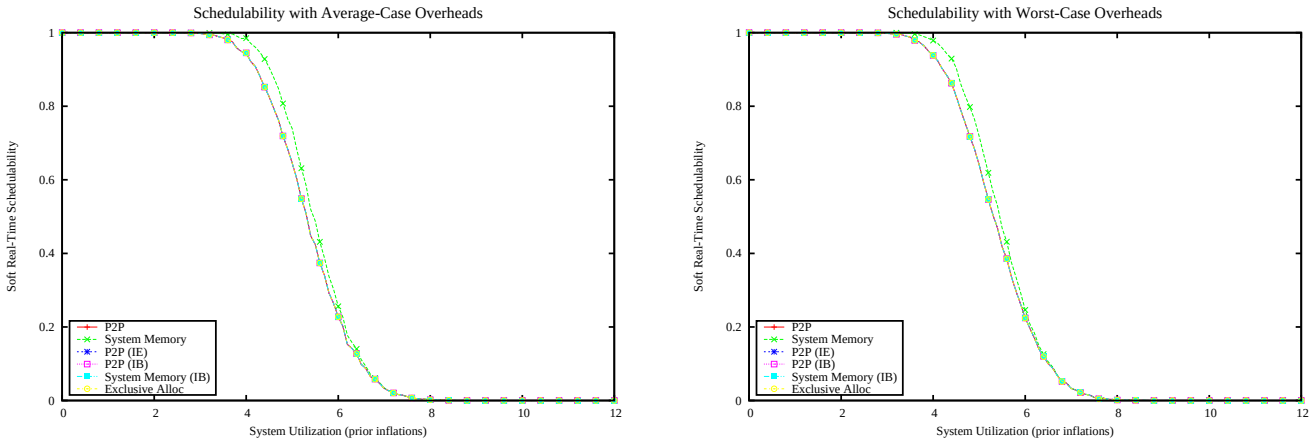

Figure 815: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

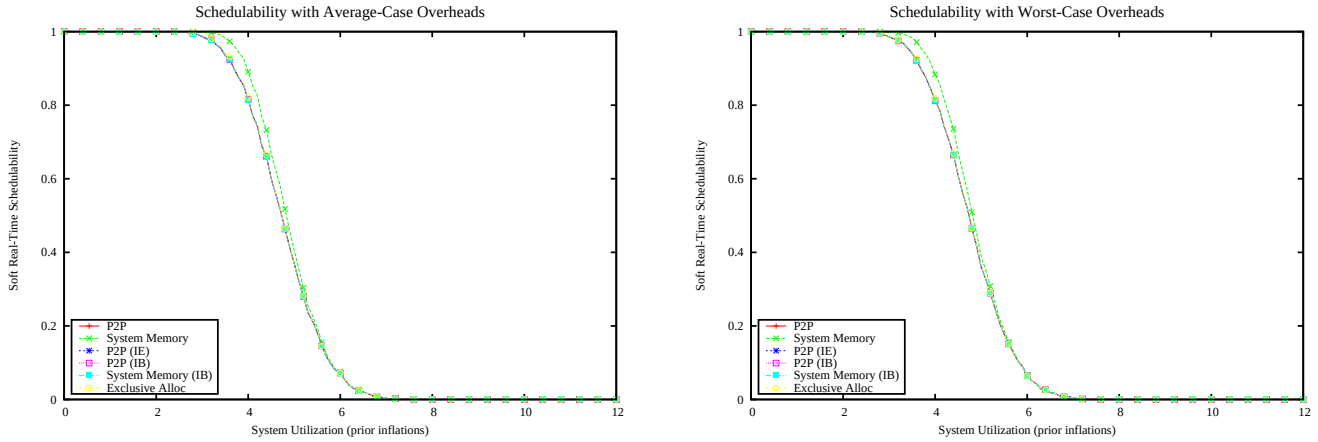

Figure 816: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

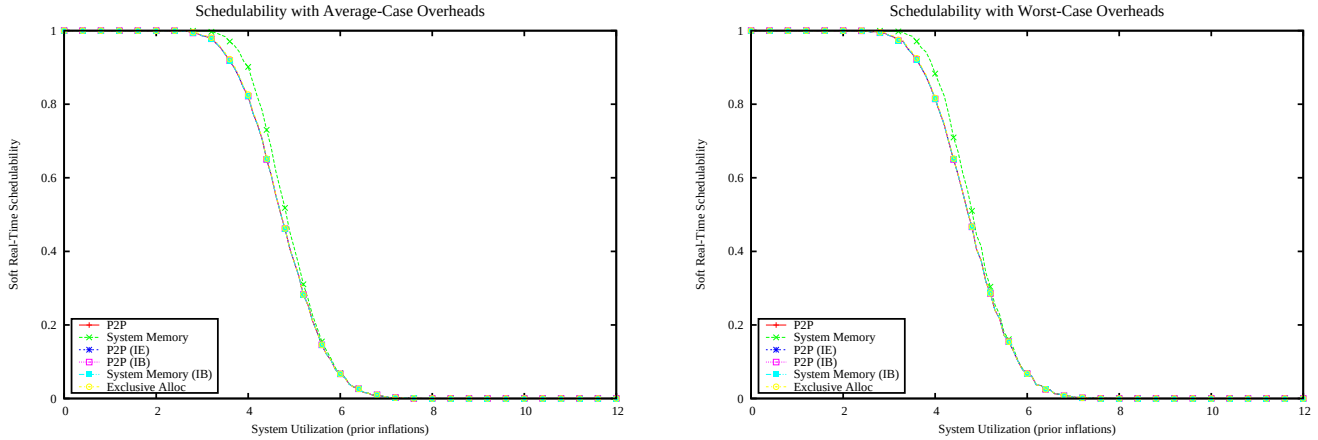

Figure 817: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

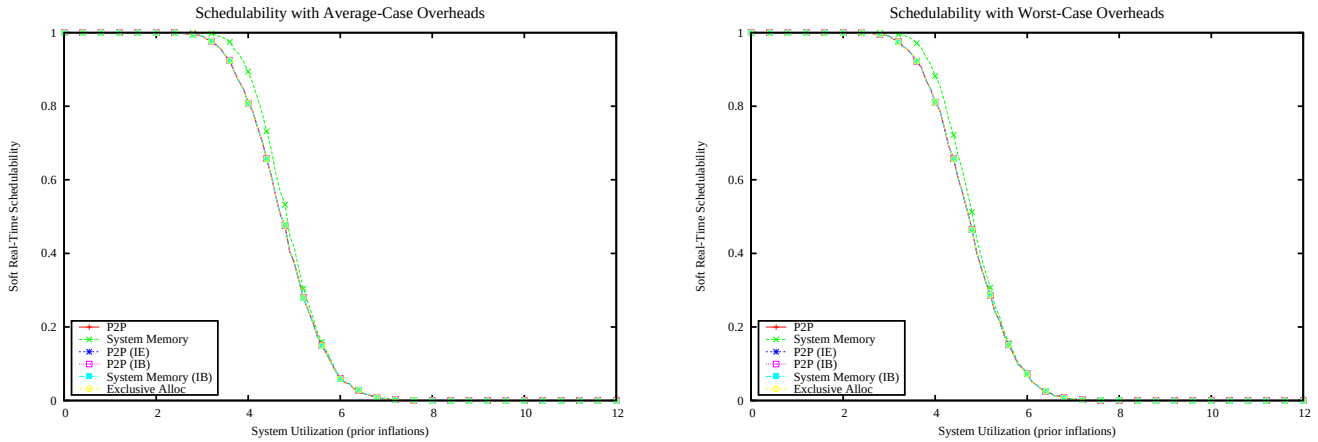

Figure 818: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

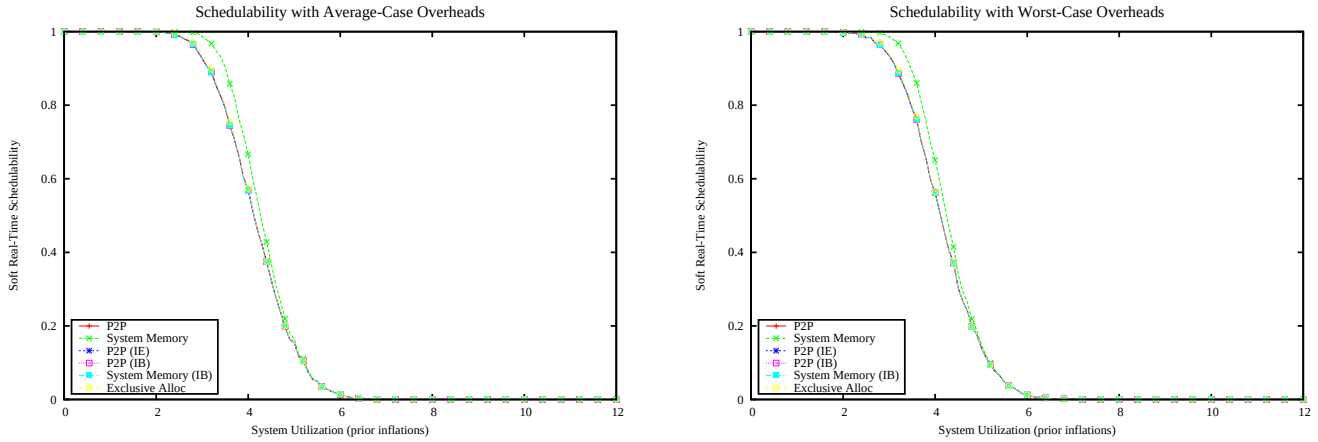

Figure 819: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

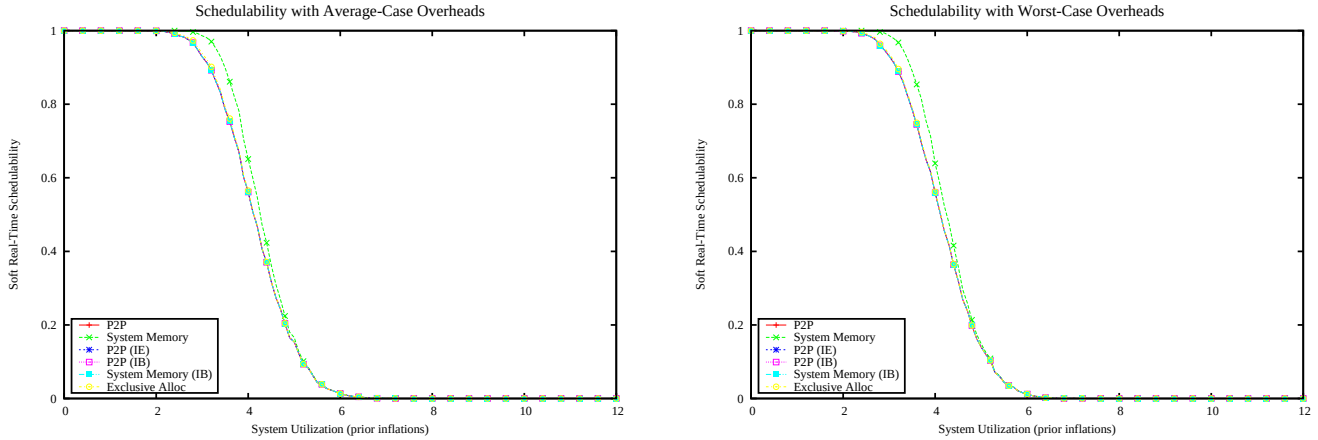

Figure 820: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

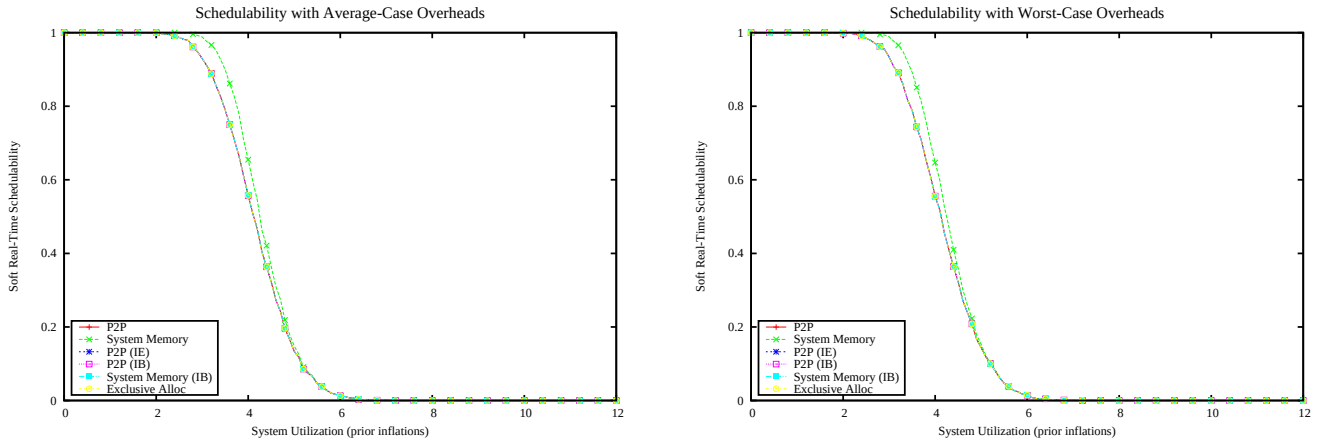

Figure 821: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

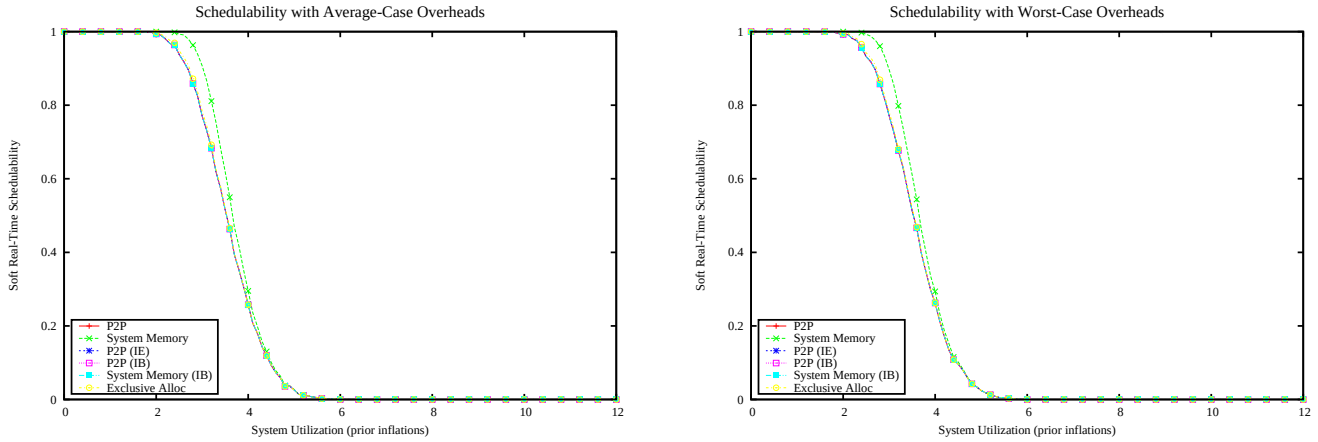

Figure 822: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

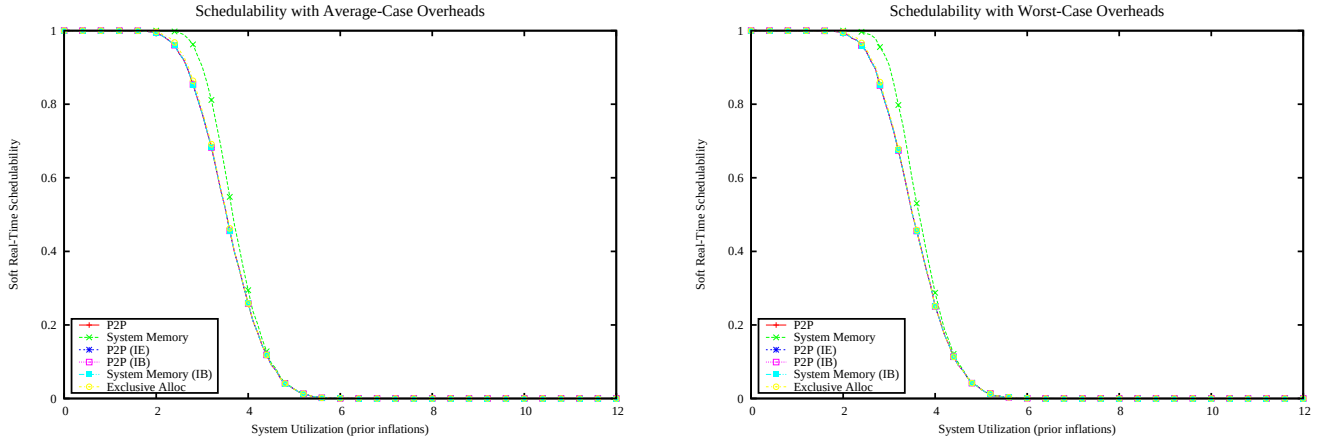

Figure 823: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

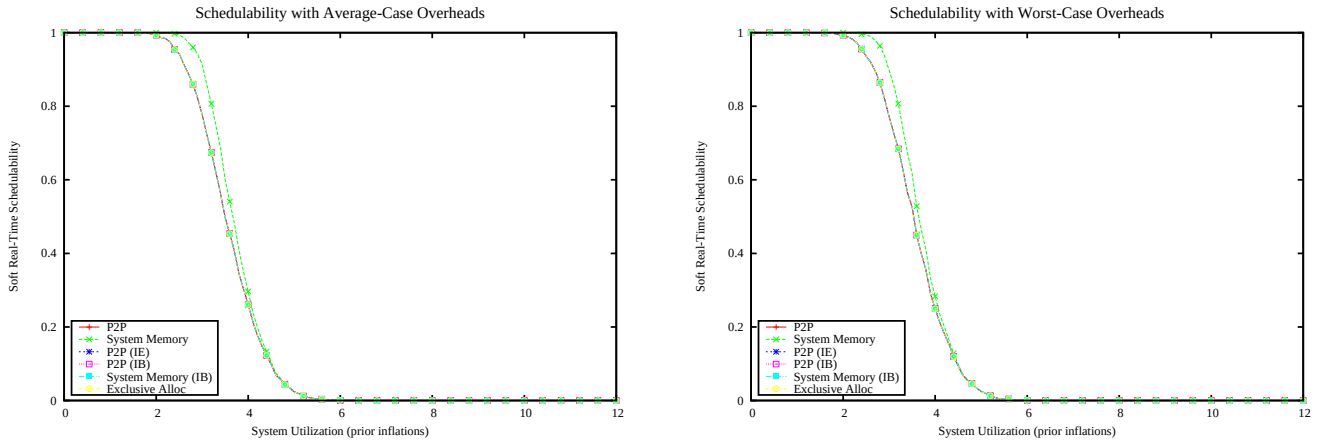

Figure 824: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

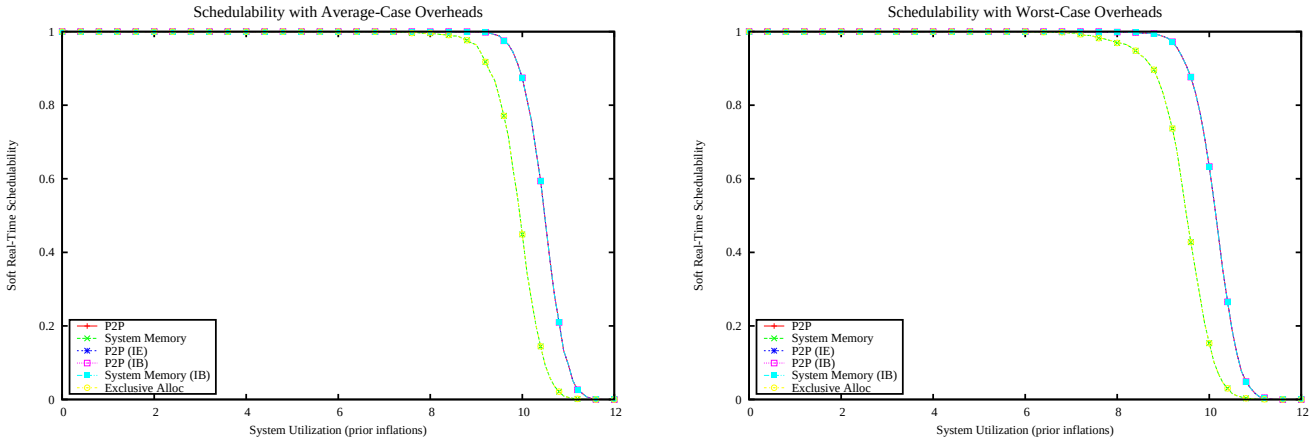

Figure 825: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

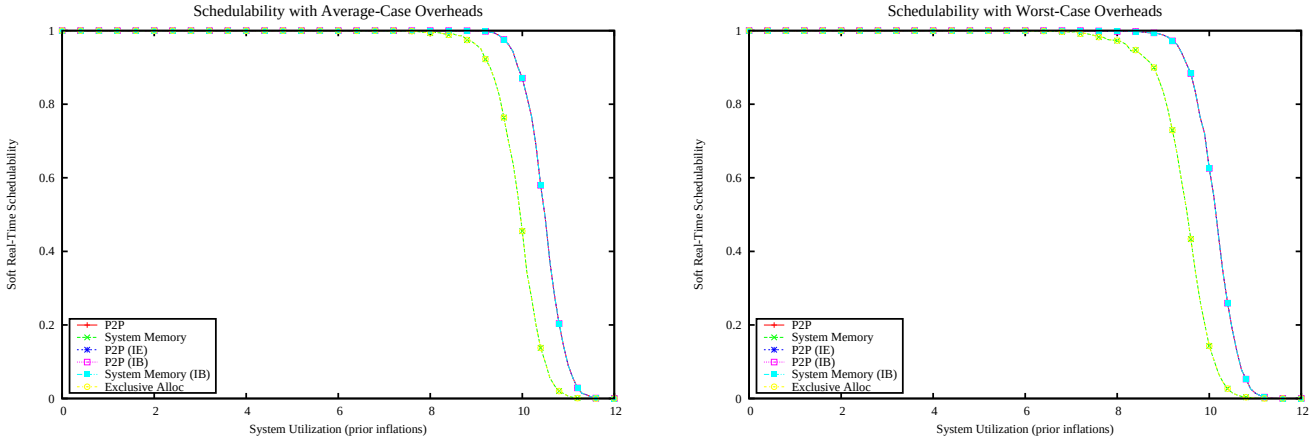

Figure 826: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

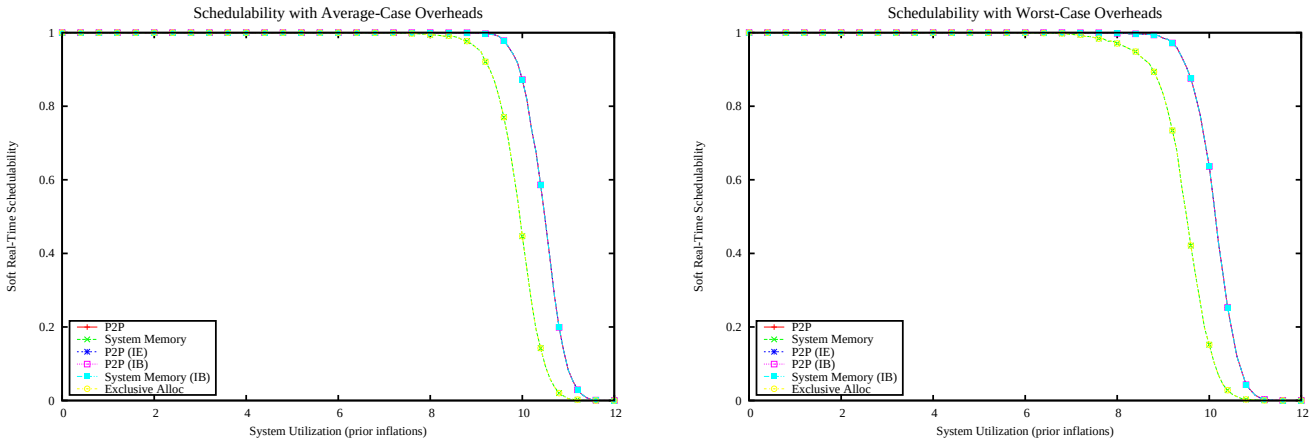

Figure 827: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

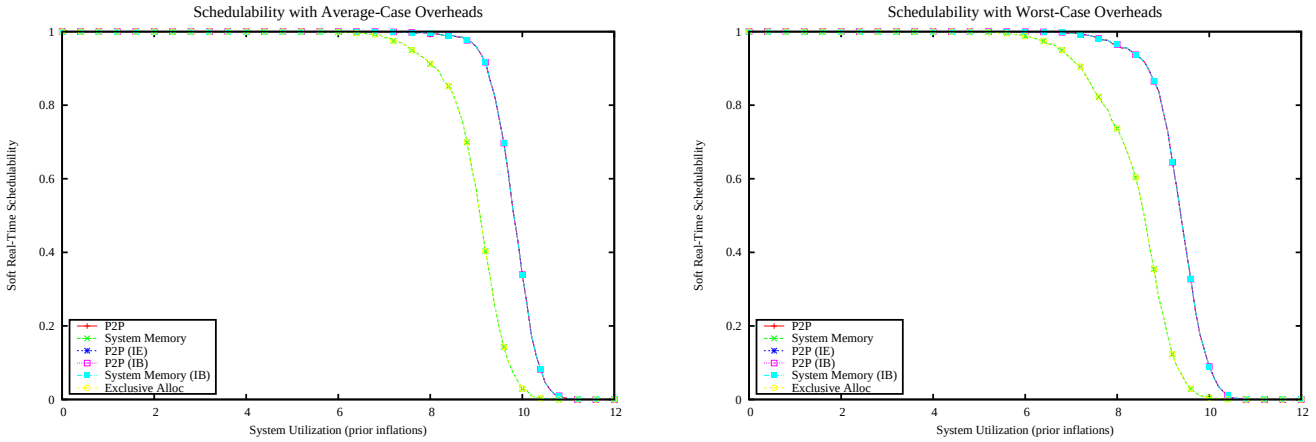

Figure 828: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

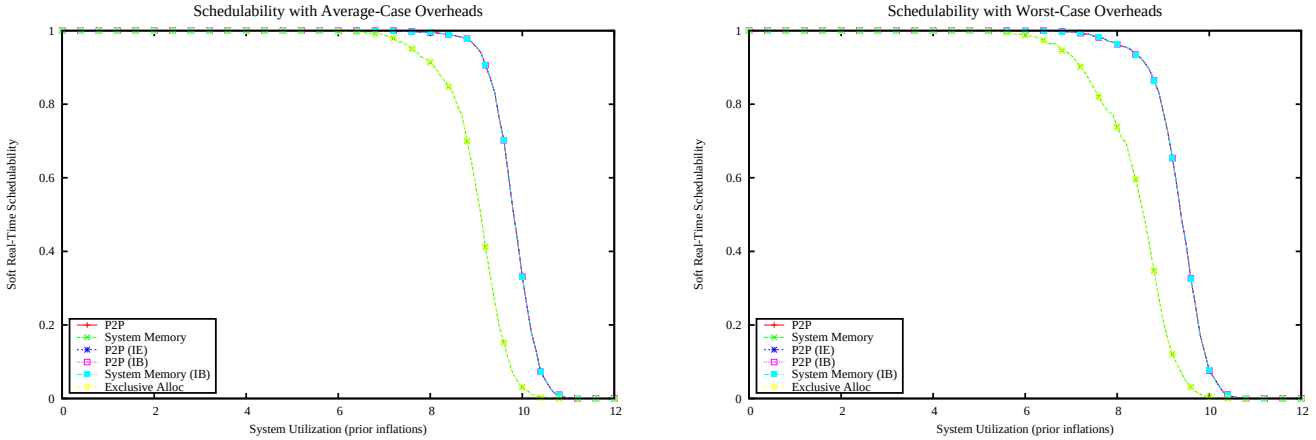

Figure 829: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

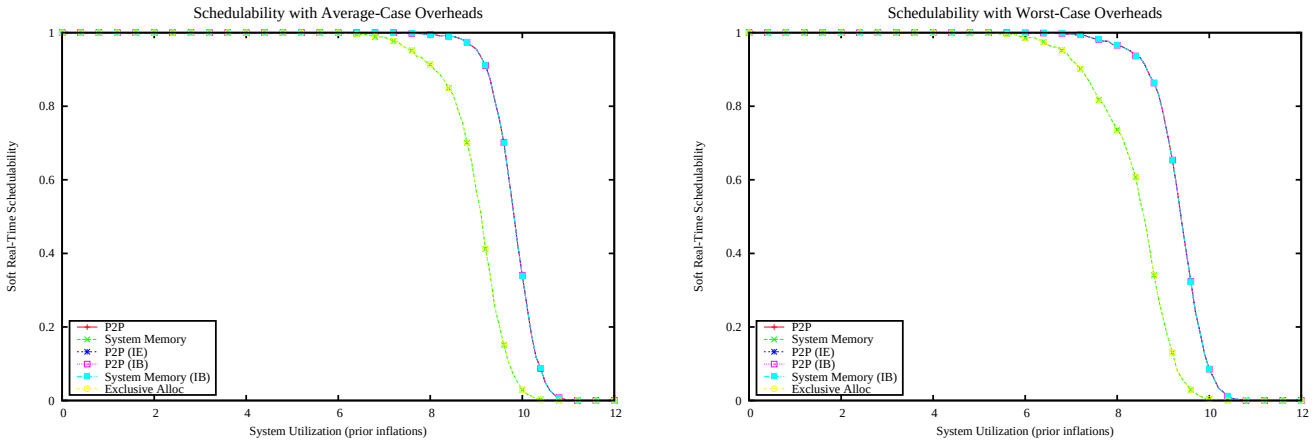

Figure 830: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

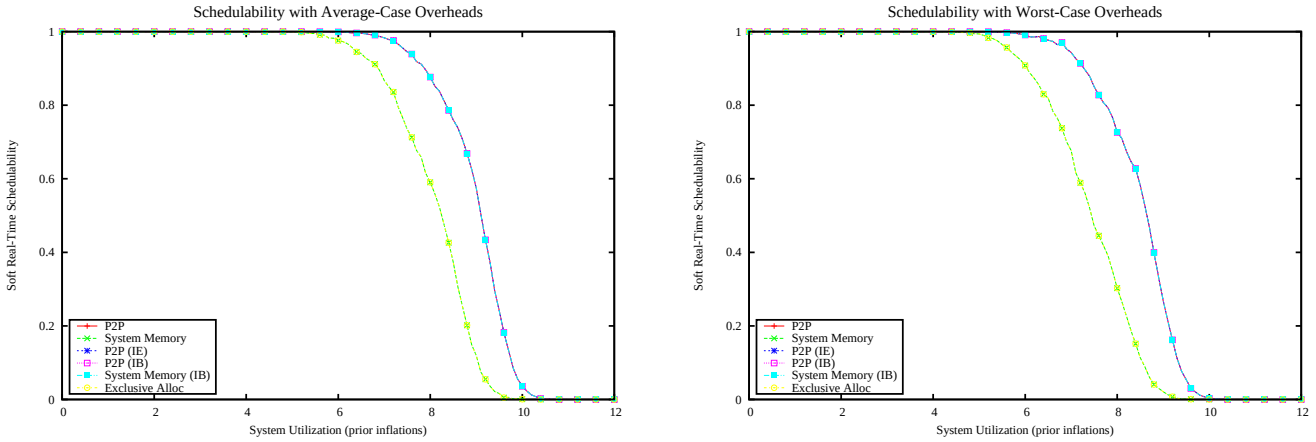

Figure 831: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

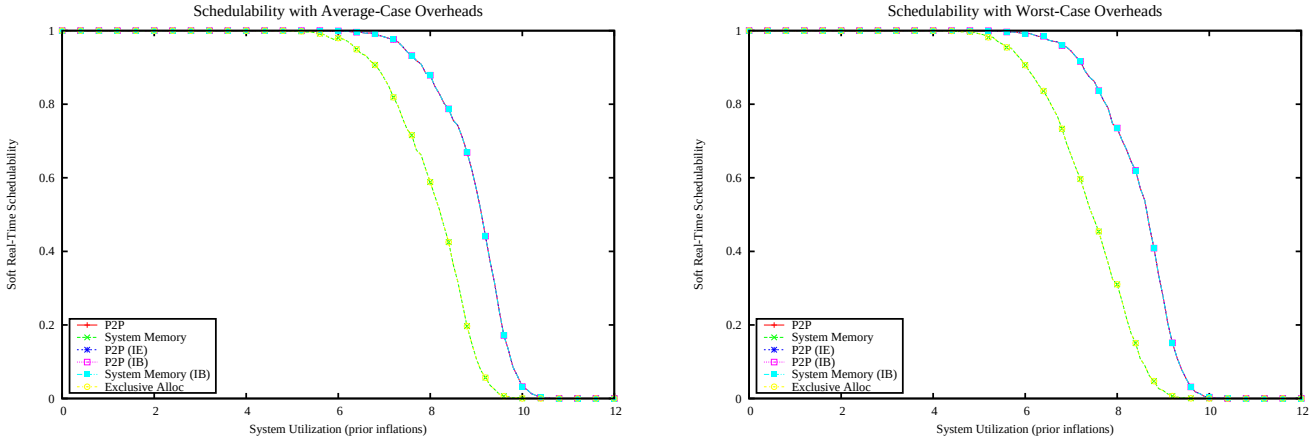

Figure 832: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

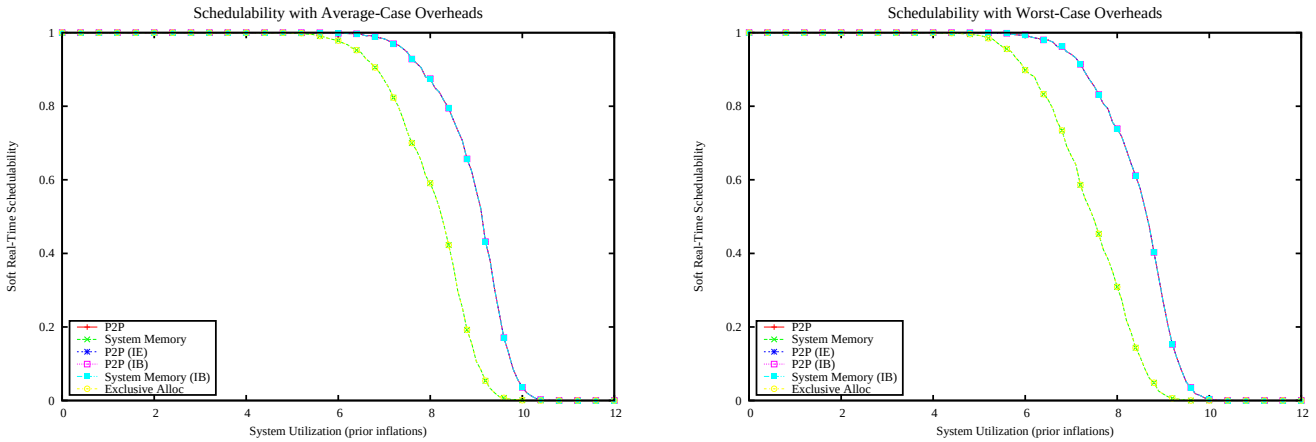

Figure 833: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

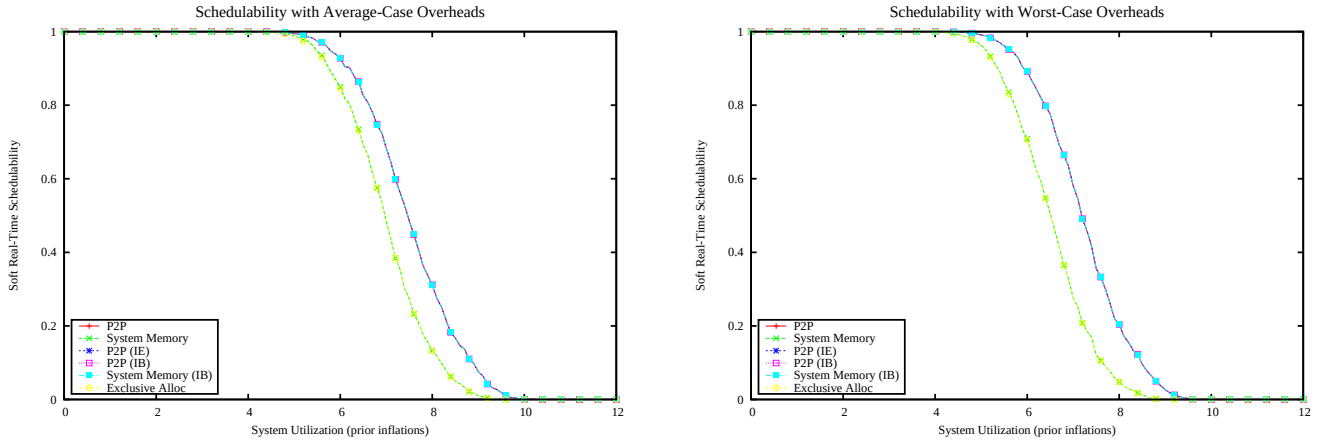

Figure 834: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

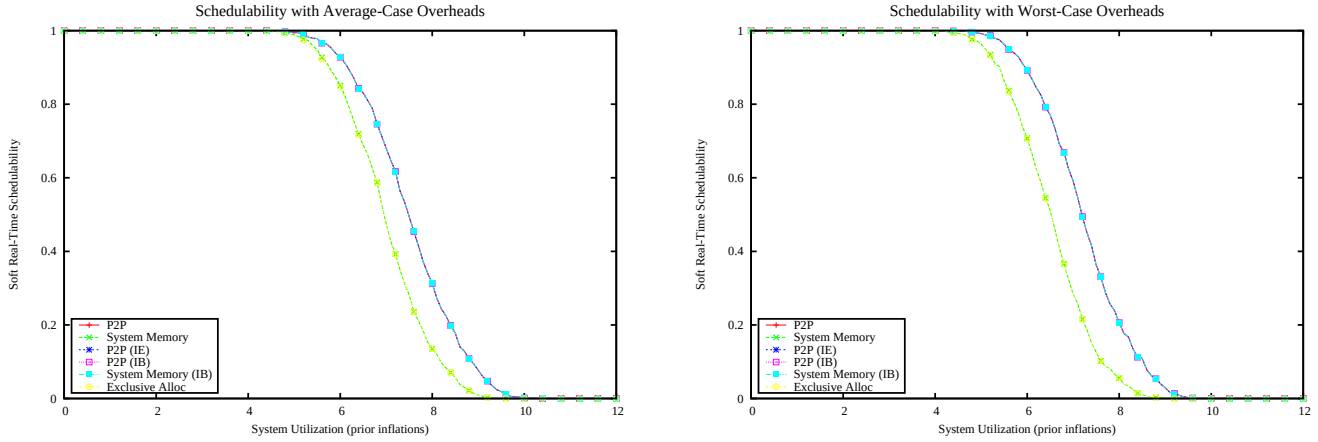

Figure 835: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

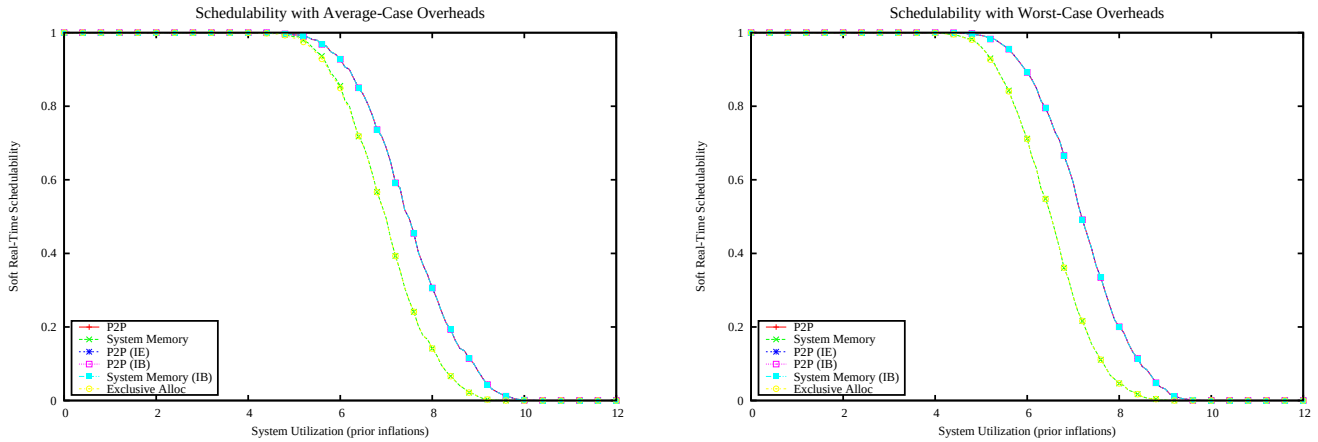

Figure 836: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

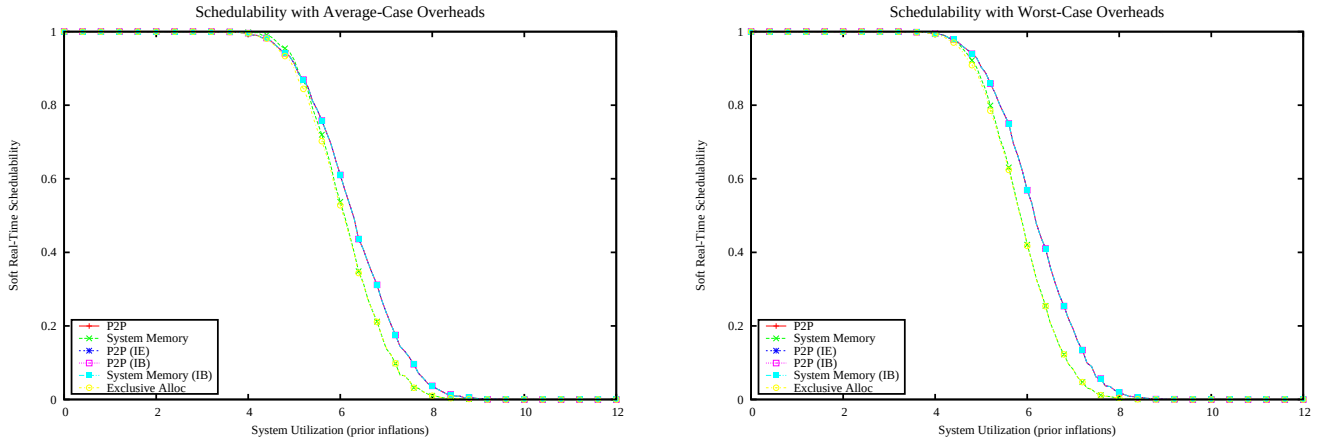

Figure 837: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

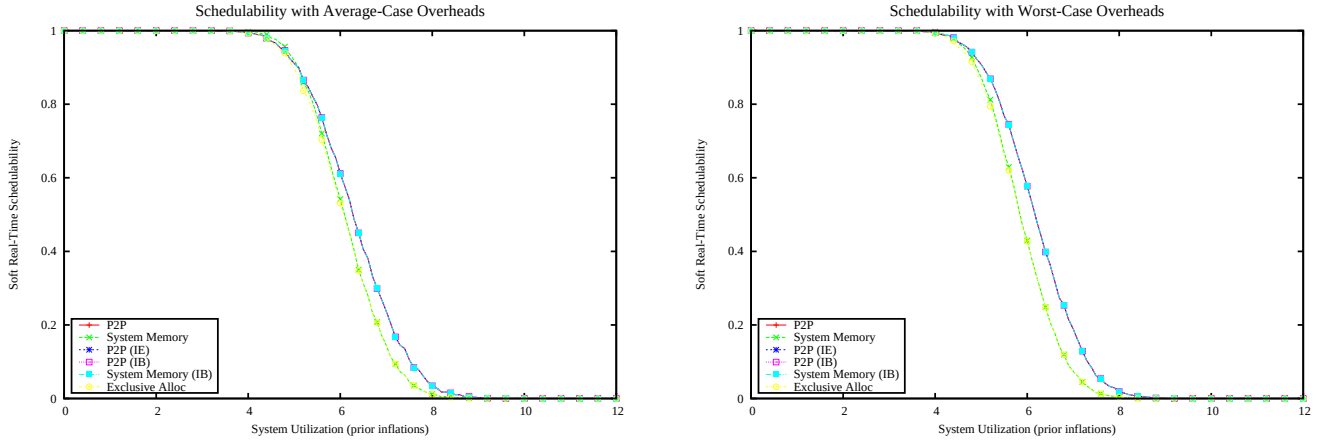

Figure 838: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

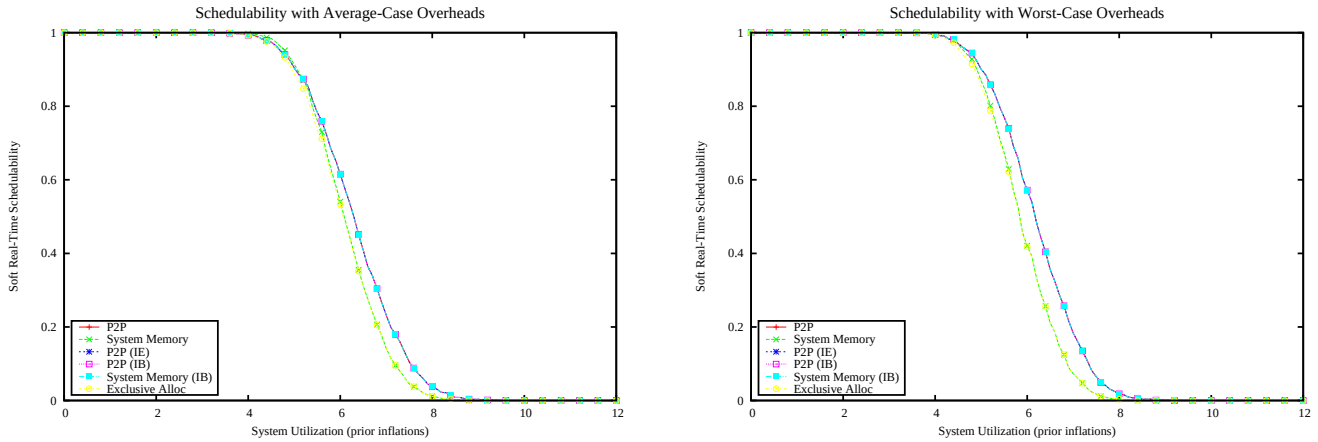

Figure 839: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

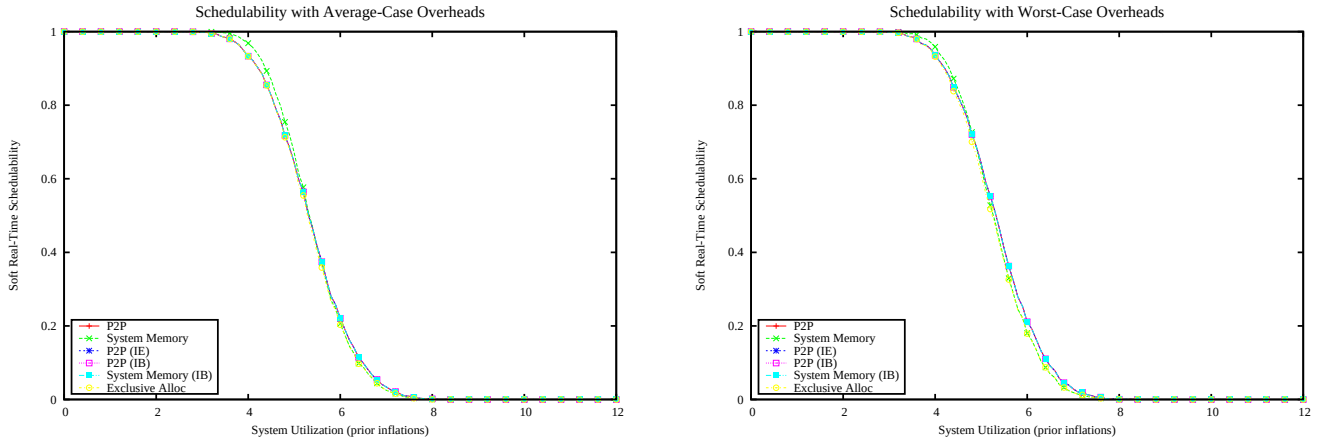

Figure 840: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

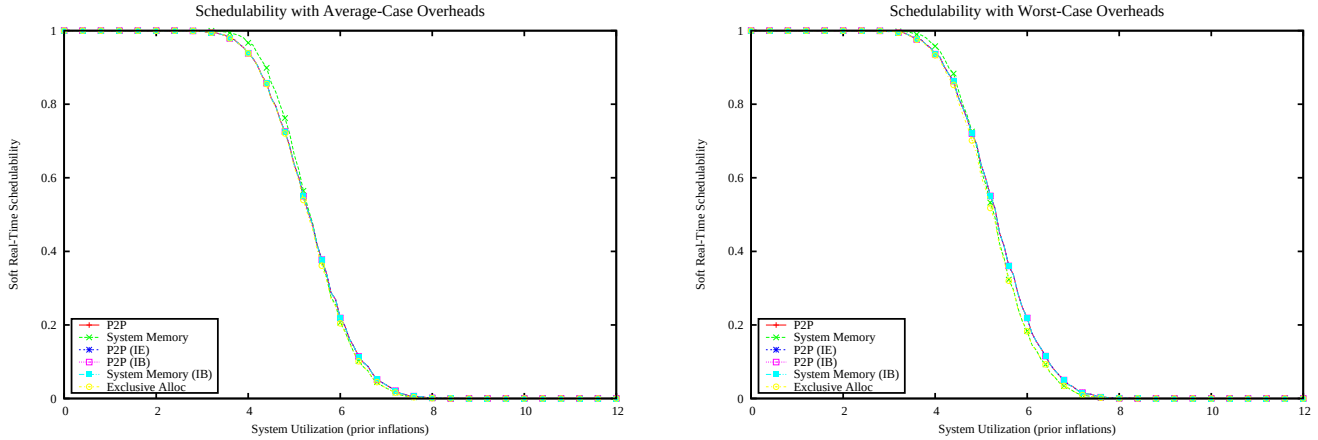

Figure 841: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

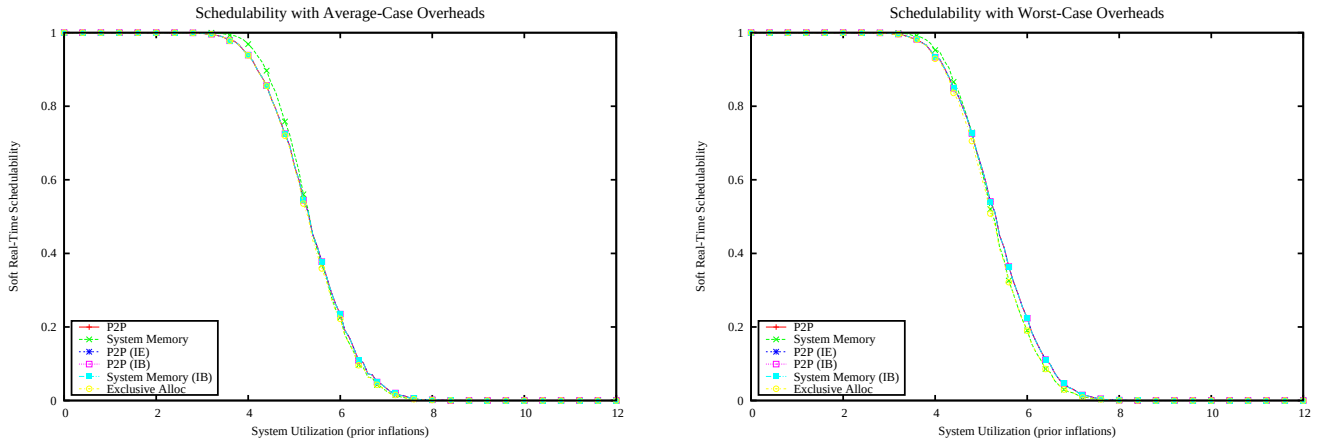

Figure 842: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

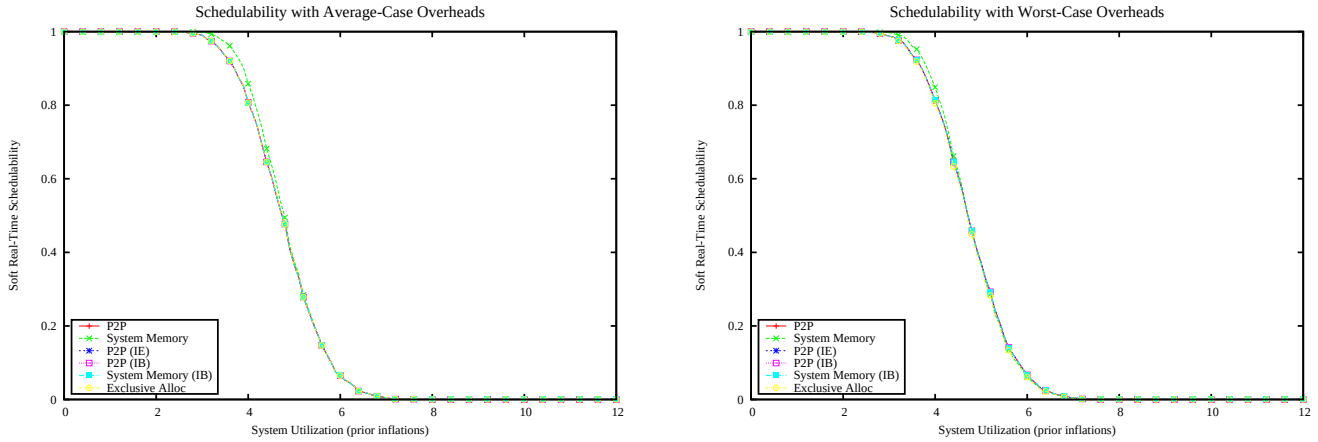

Figure 843: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

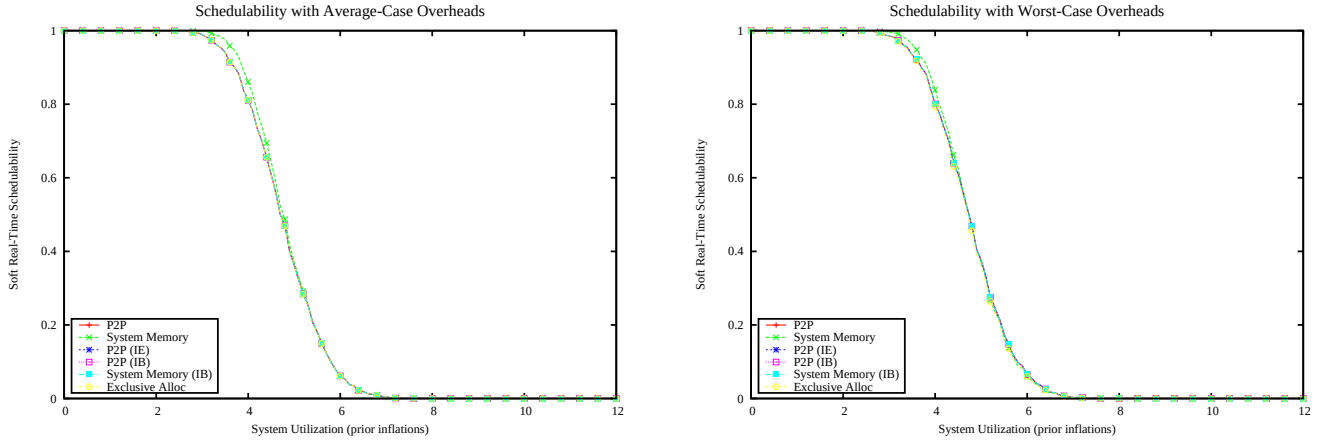

Figure 844: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

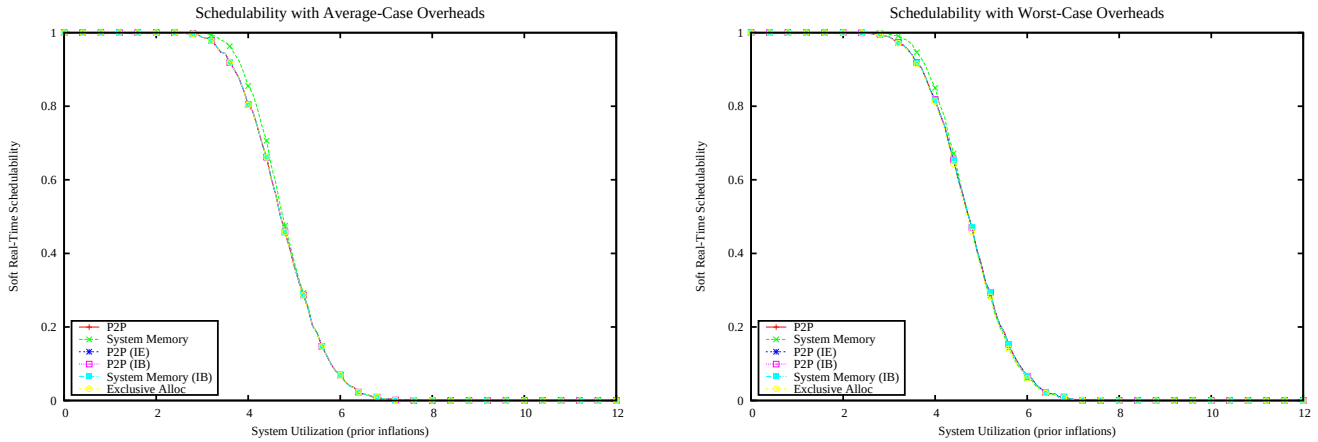

Figure 845: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

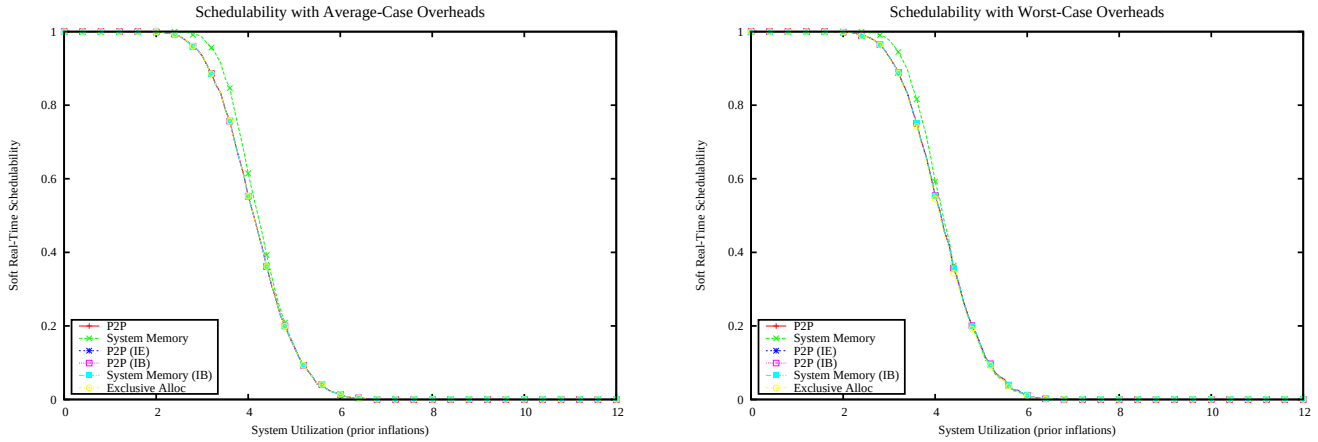

Figure 846: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

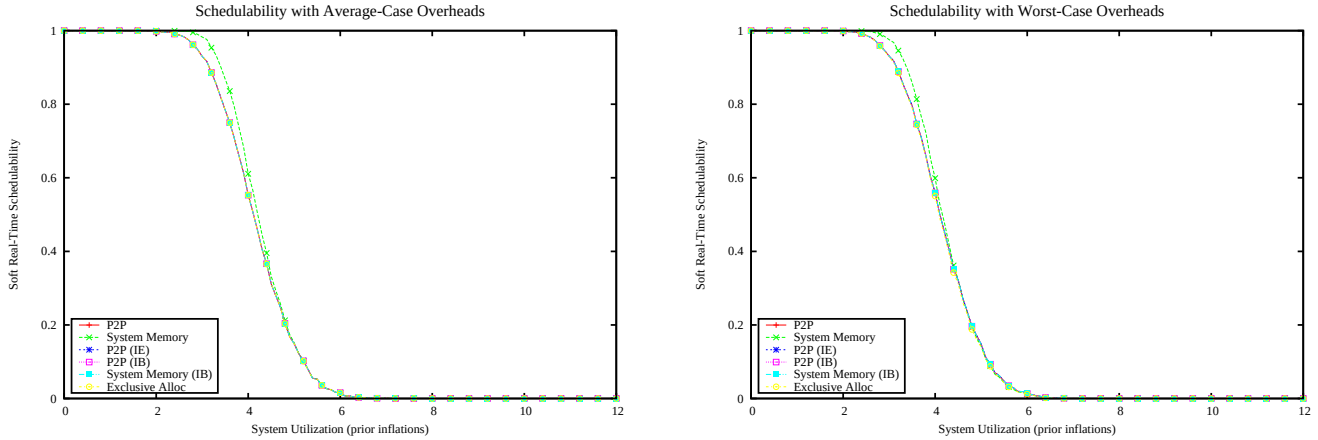

Figure 847: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

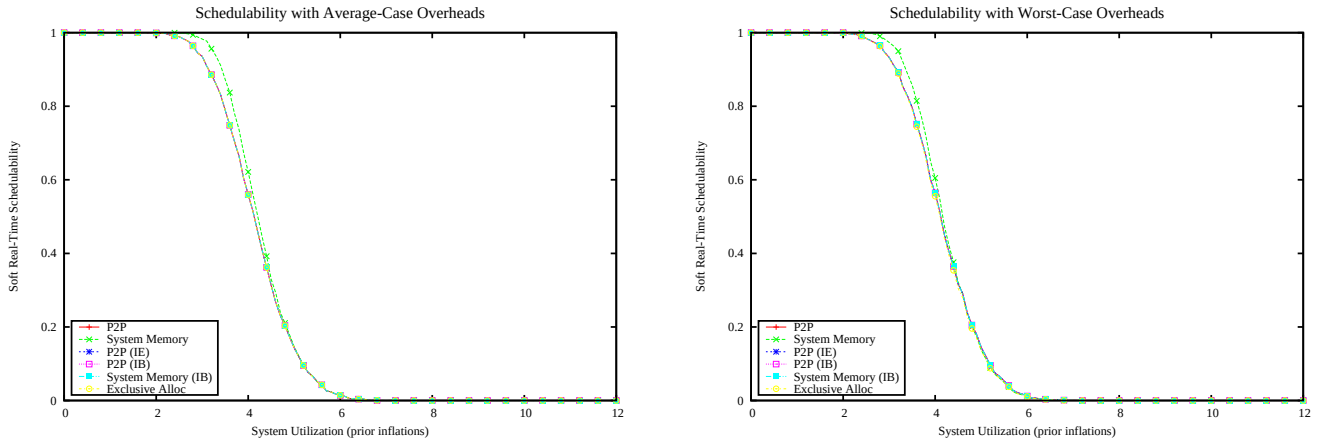

Figure 848: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

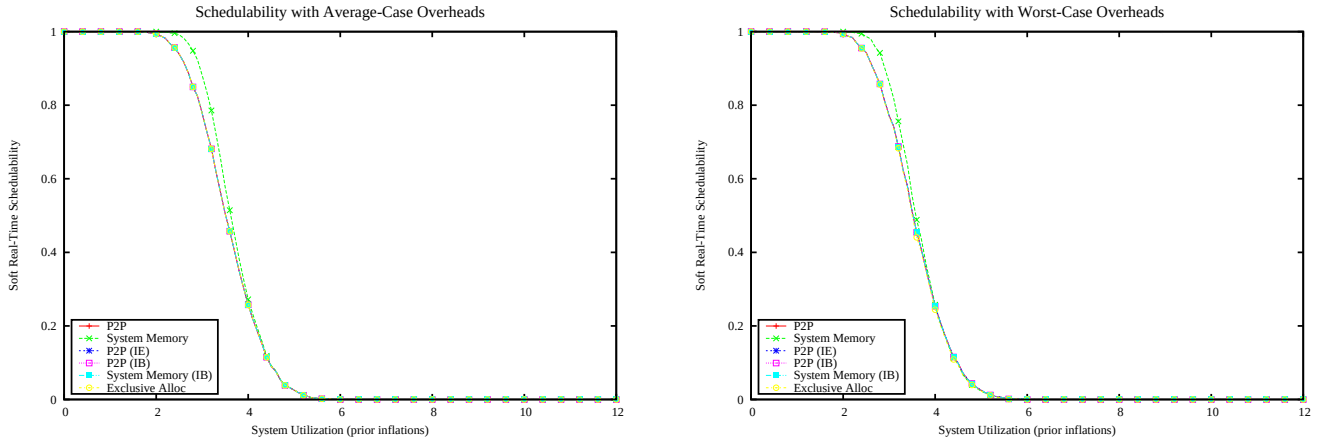

Figure 849: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

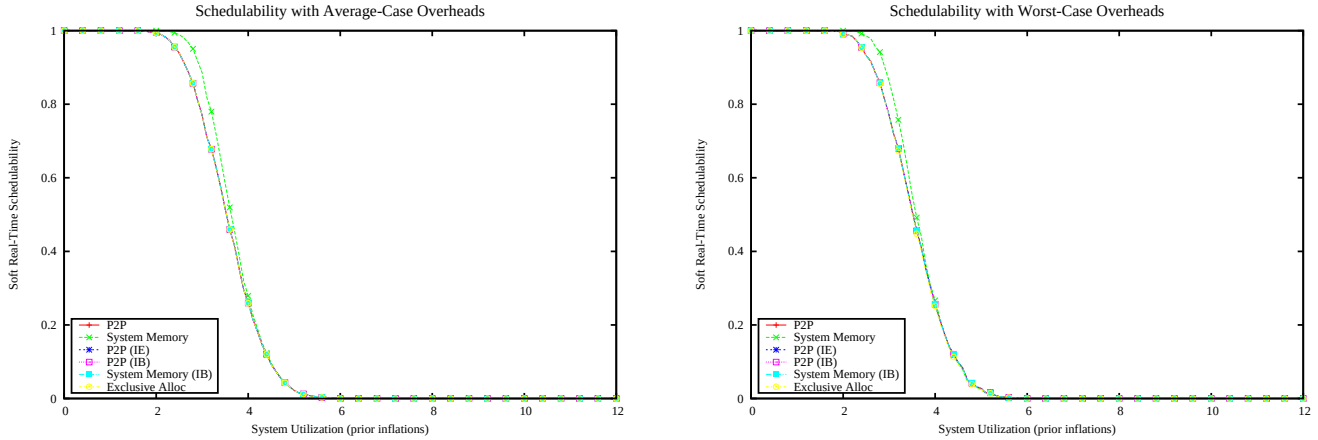

Figure 850: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

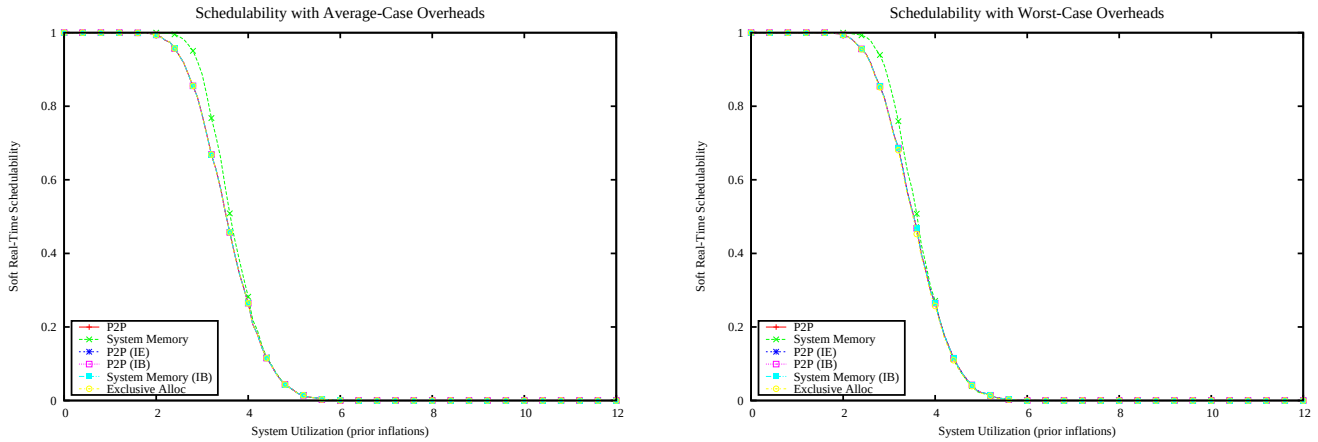

Figure 851: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

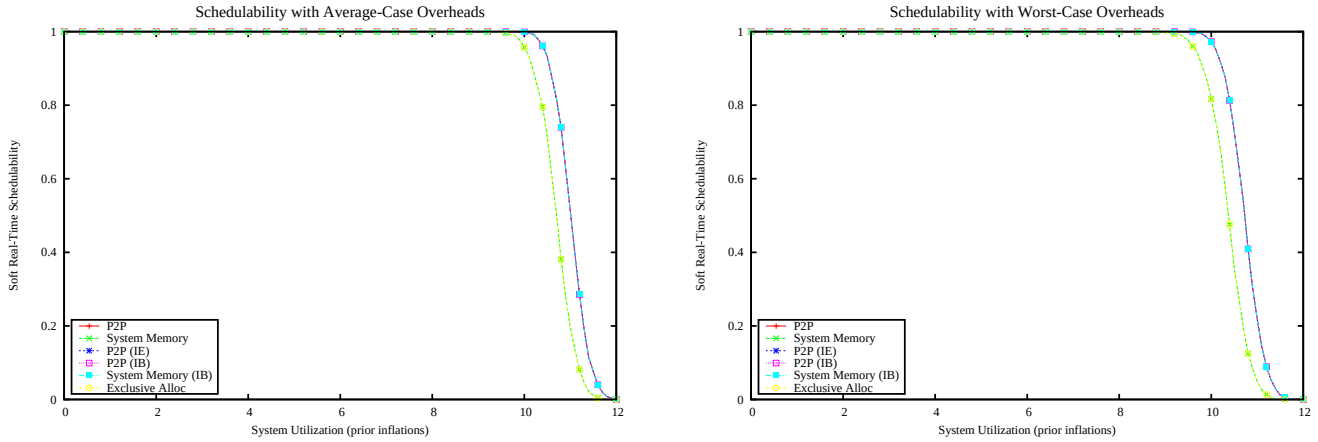

Figure 852: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

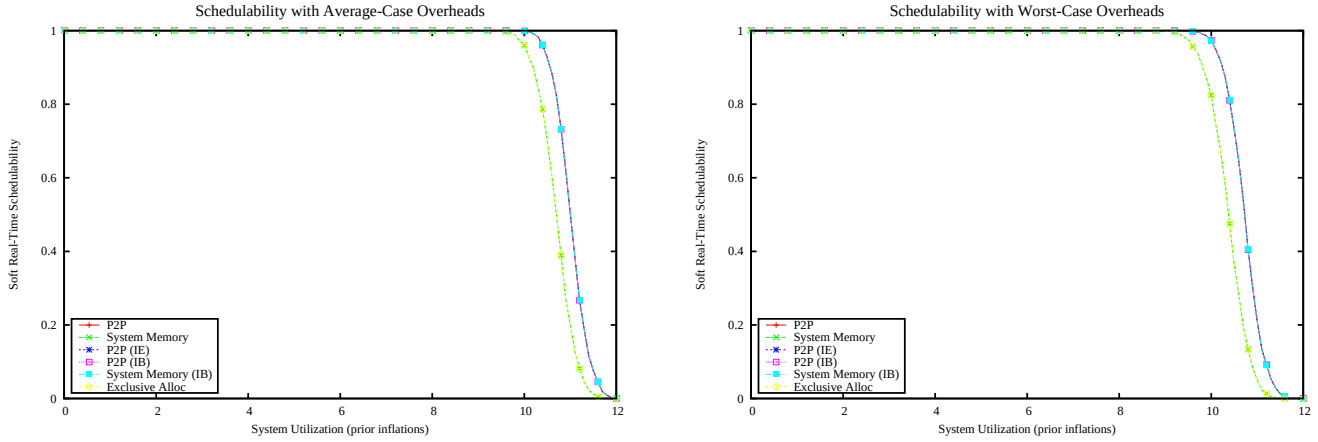

Figure 853: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

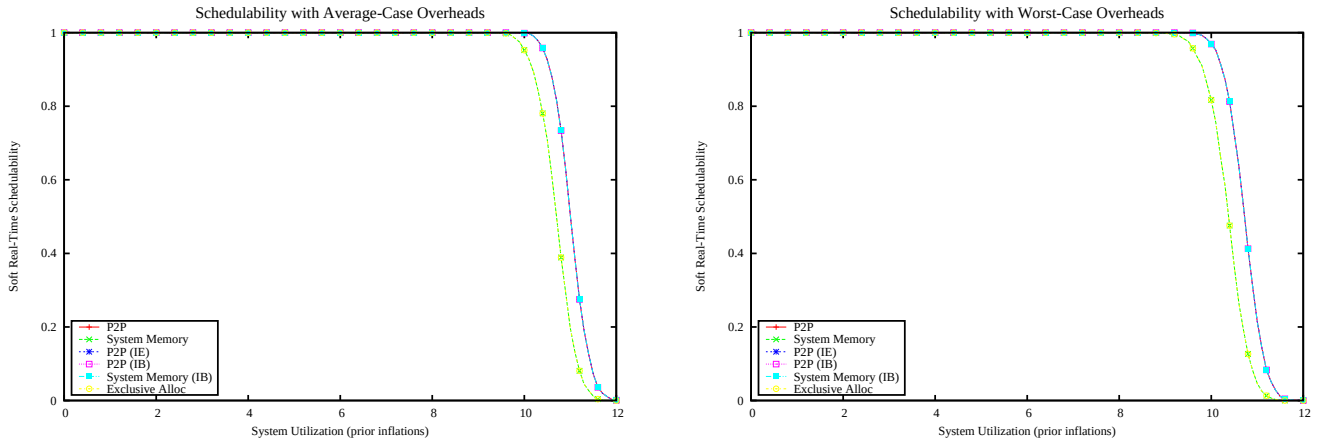

Figure 854: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

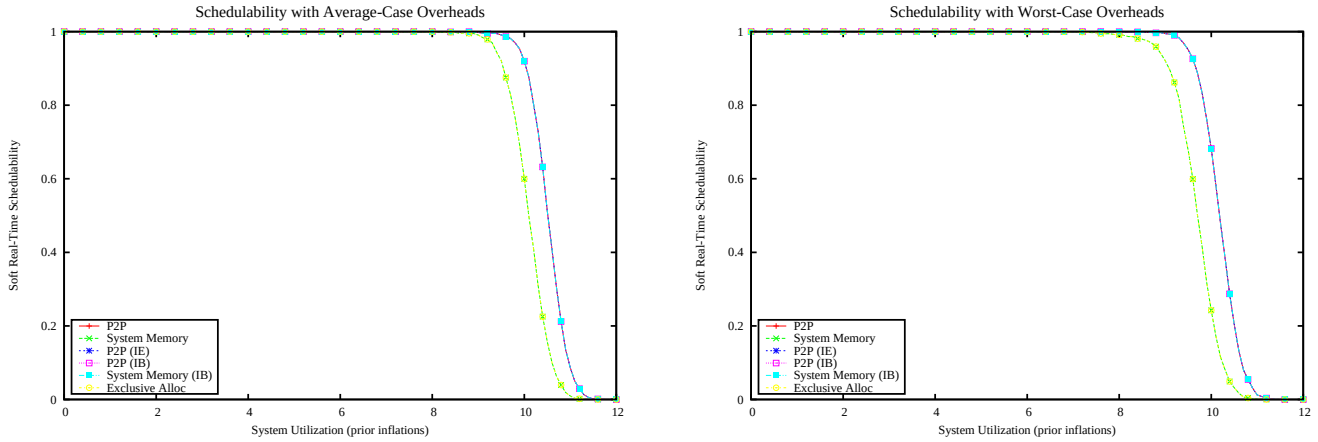

Figure 855: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

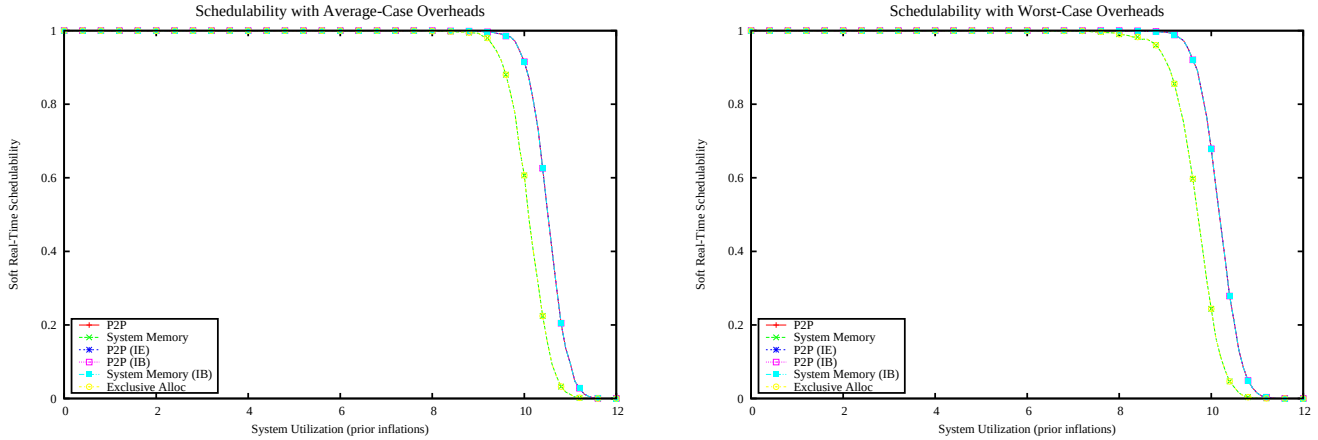

Figure 856: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

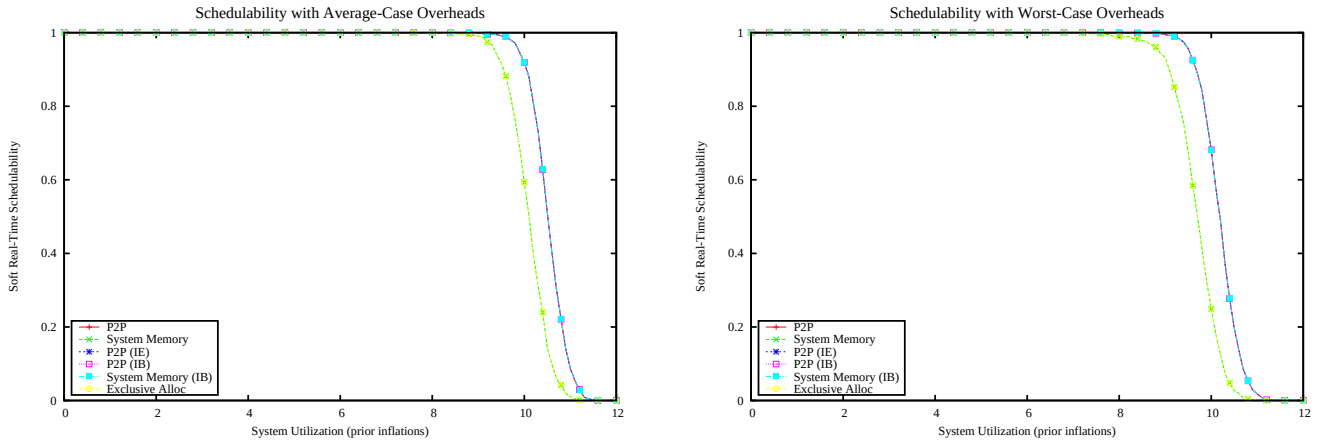

Figure 857: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

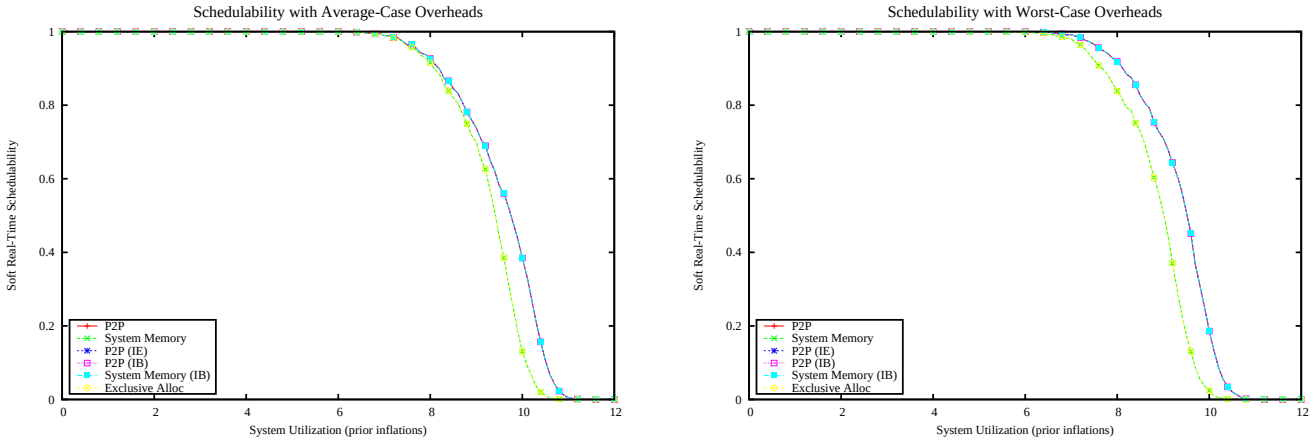

Figure 858: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

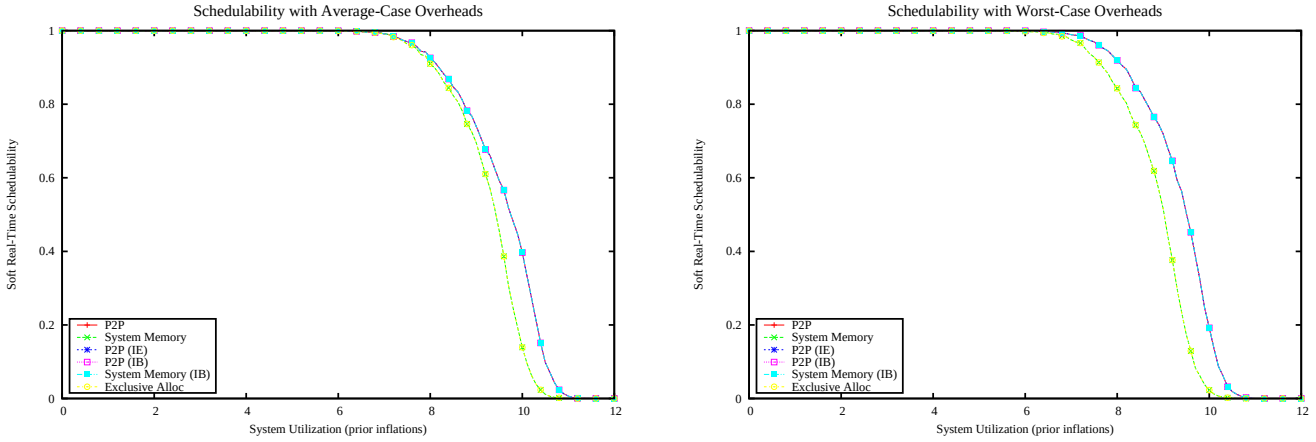

Figure 859: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

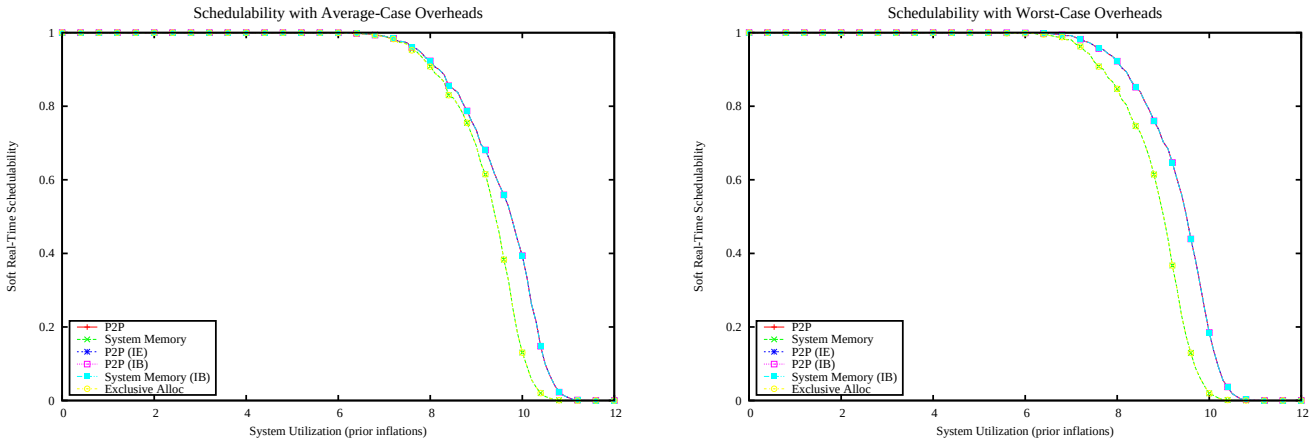

Figure 860: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

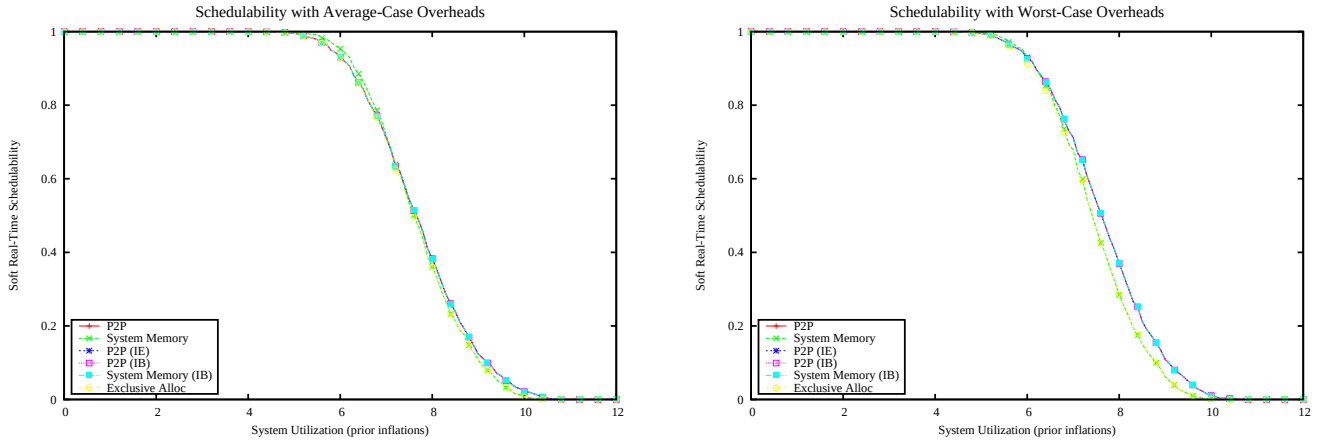

Figure 861: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

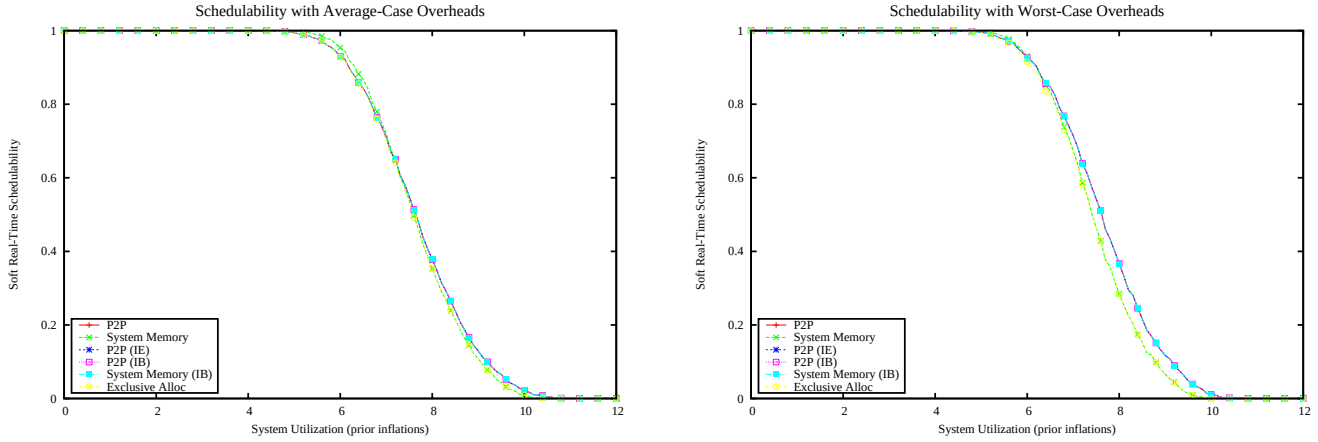

Figure 862: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

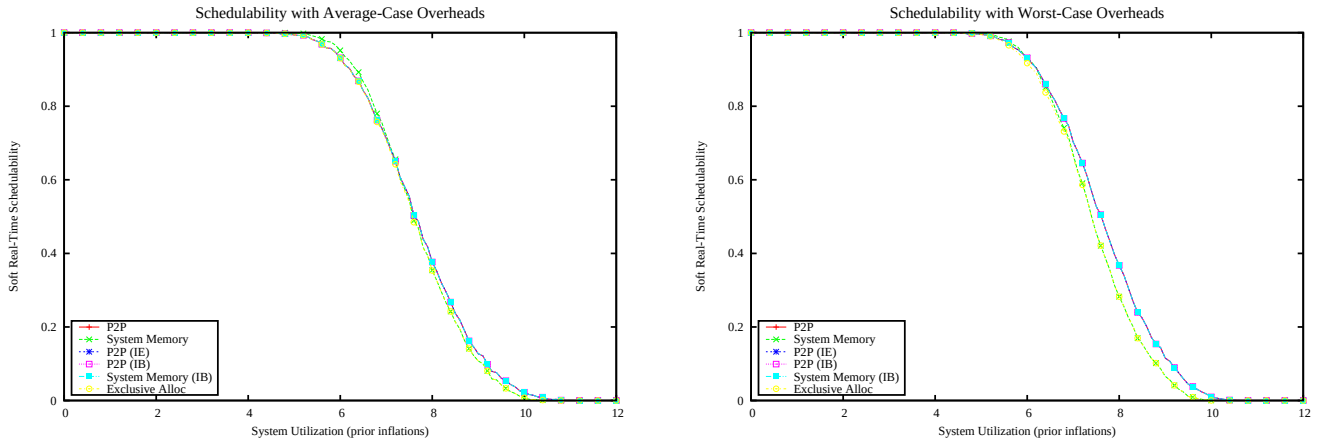

Figure 863: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

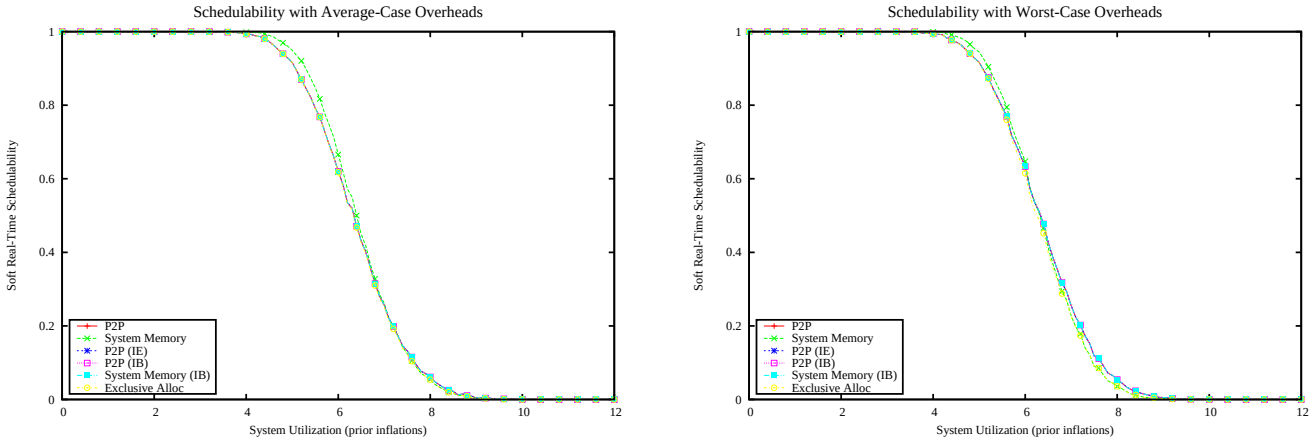

Figure 864: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

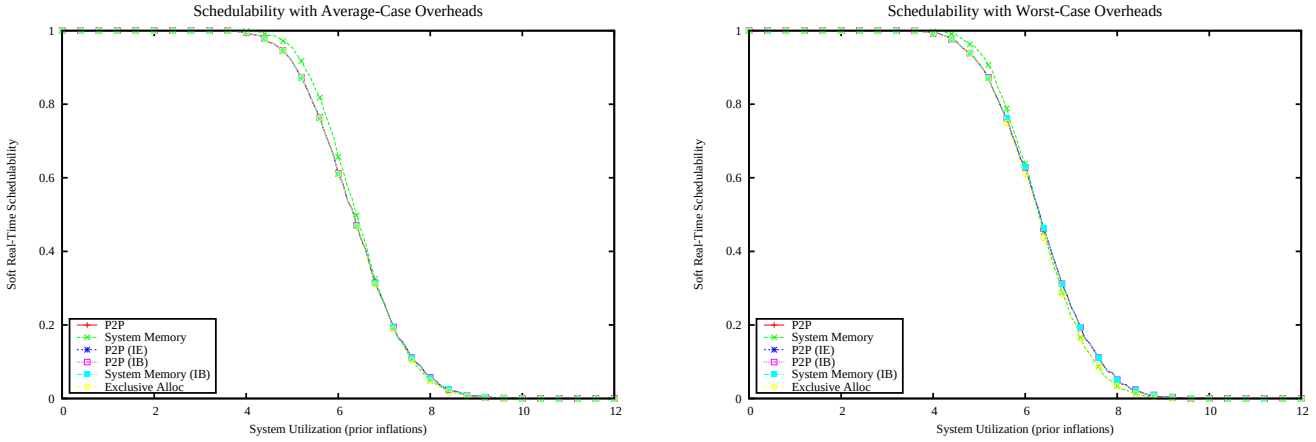

Figure 865: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

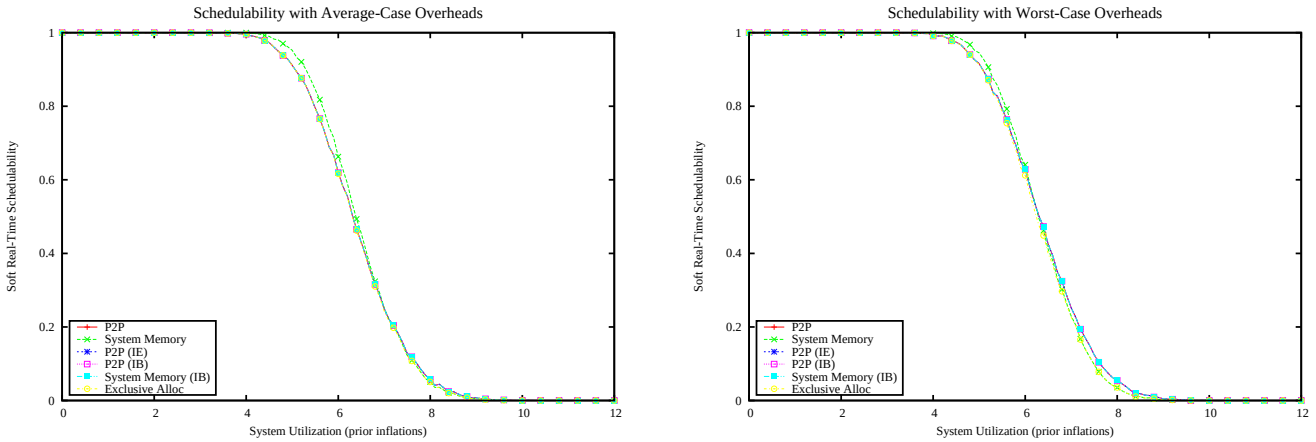

Figure 866: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

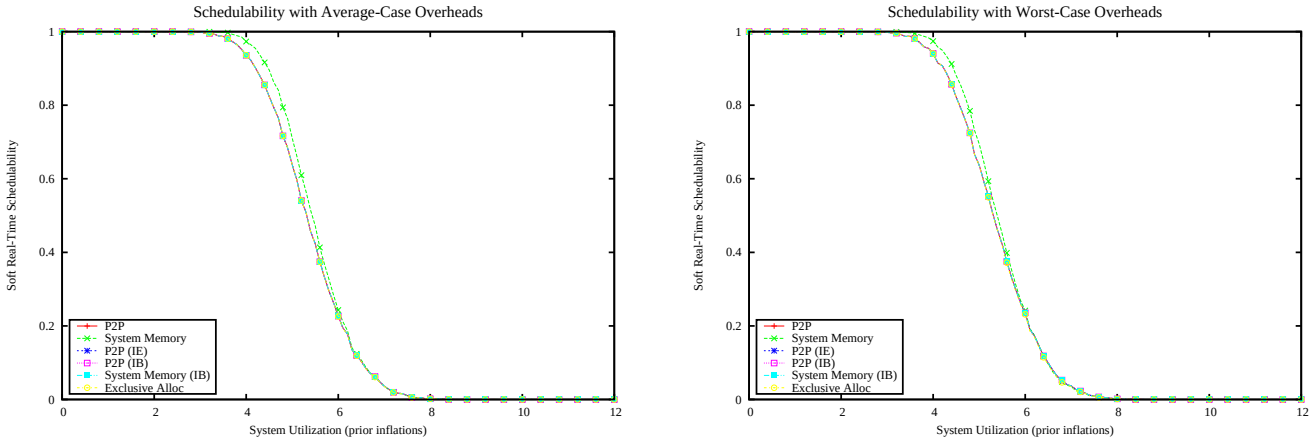

Figure 867: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

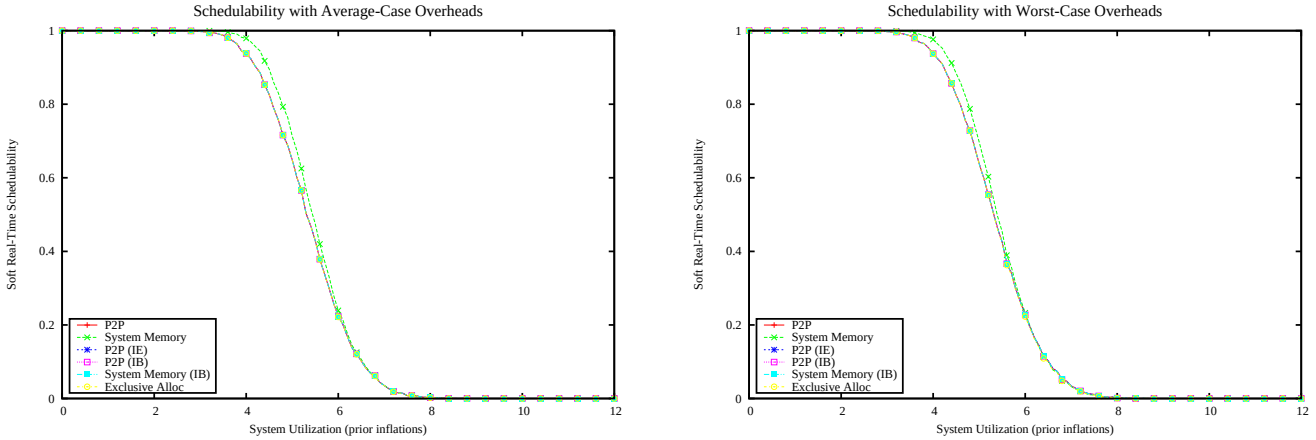

Figure 868: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

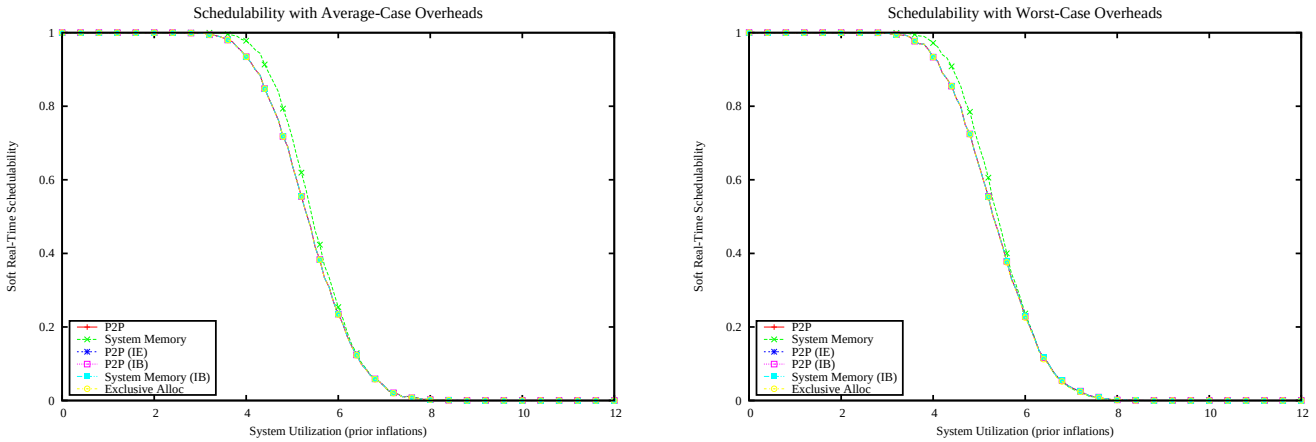

Figure 869: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

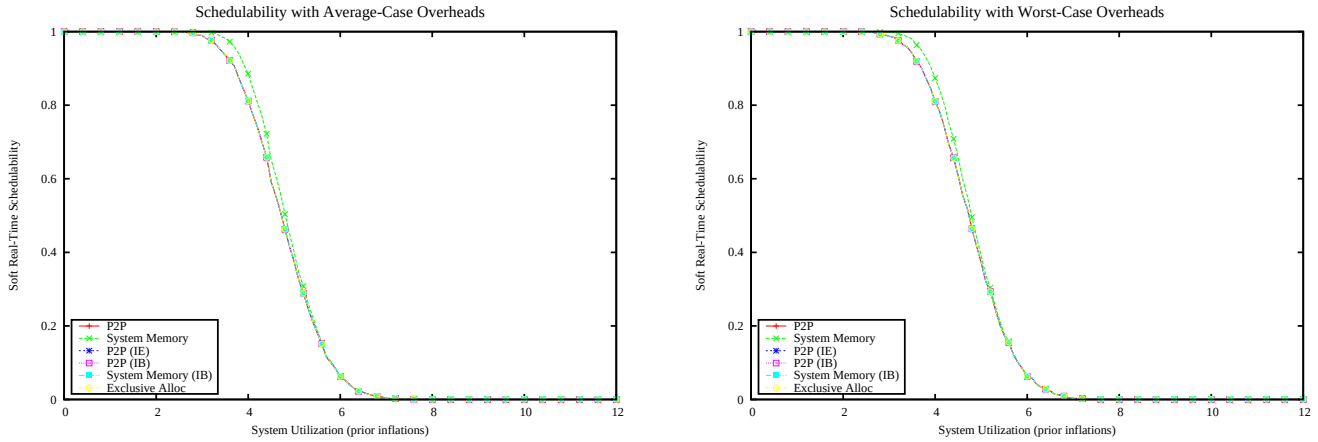

Figure 870: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

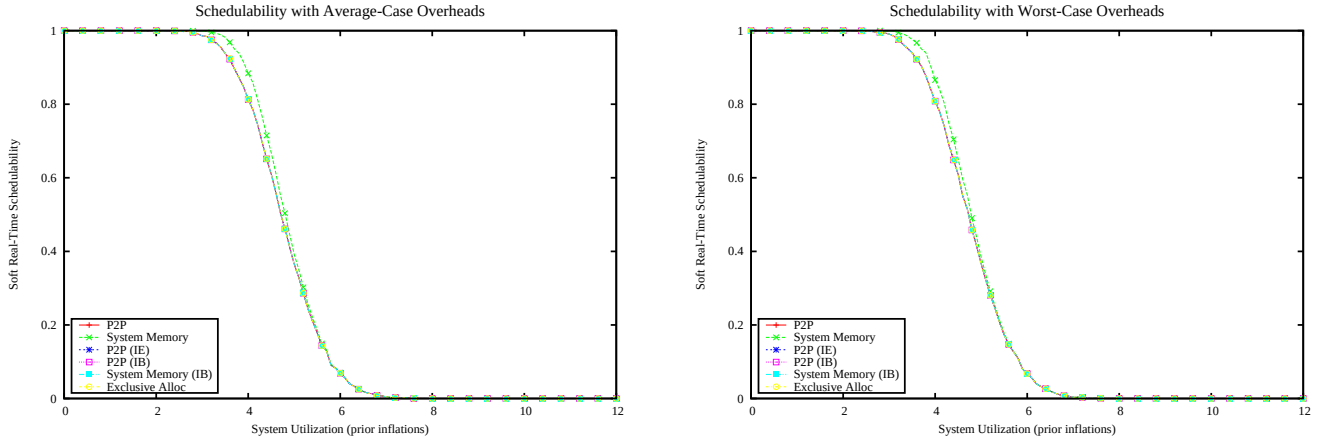

Figure 871: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

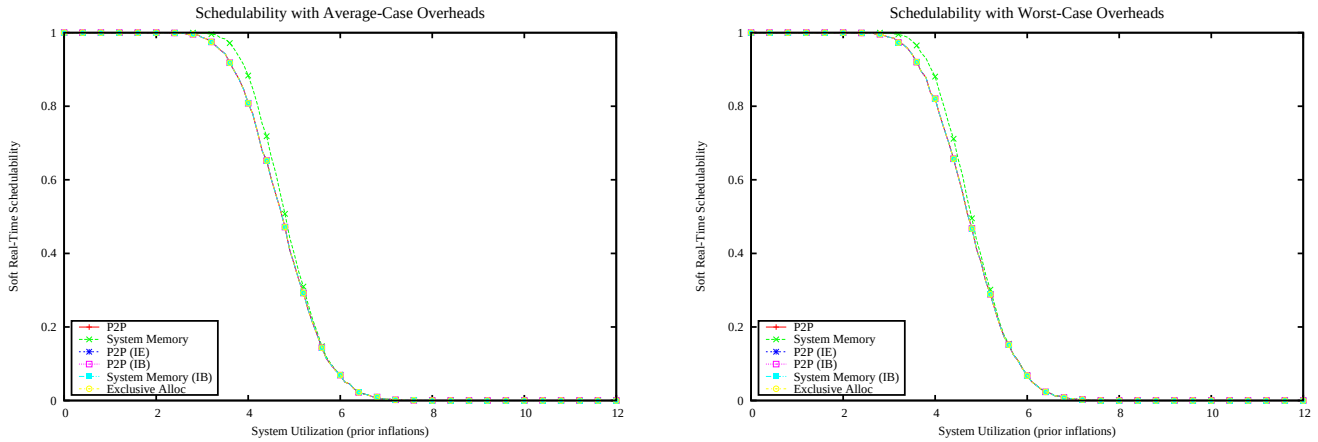

Figure 872: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

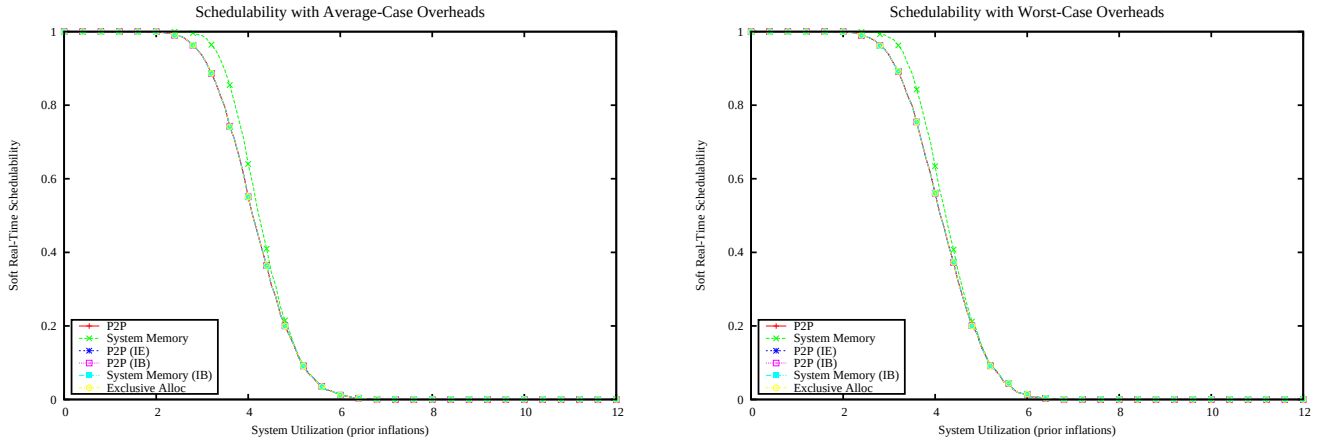

Figure 873: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

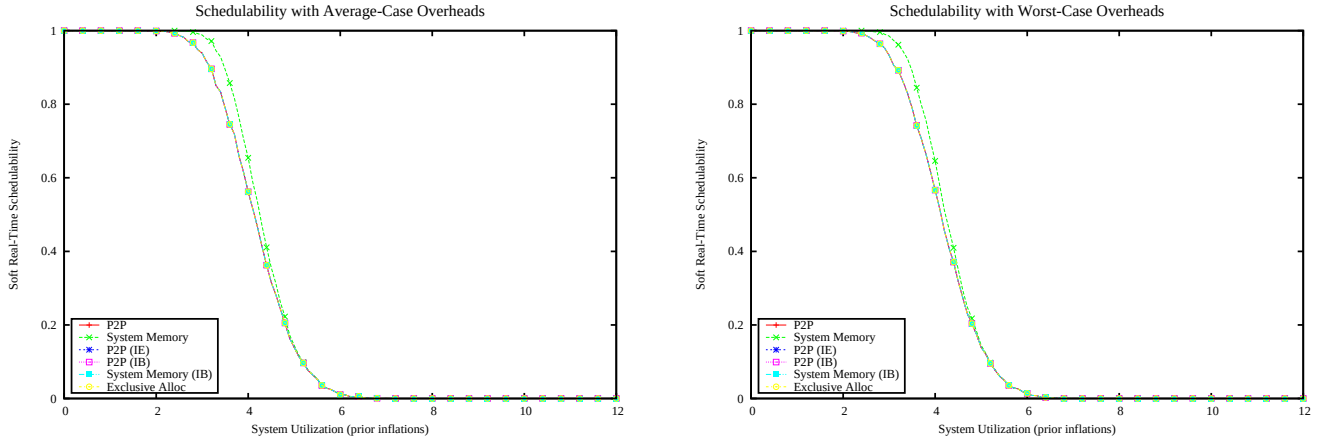

Figure 874: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

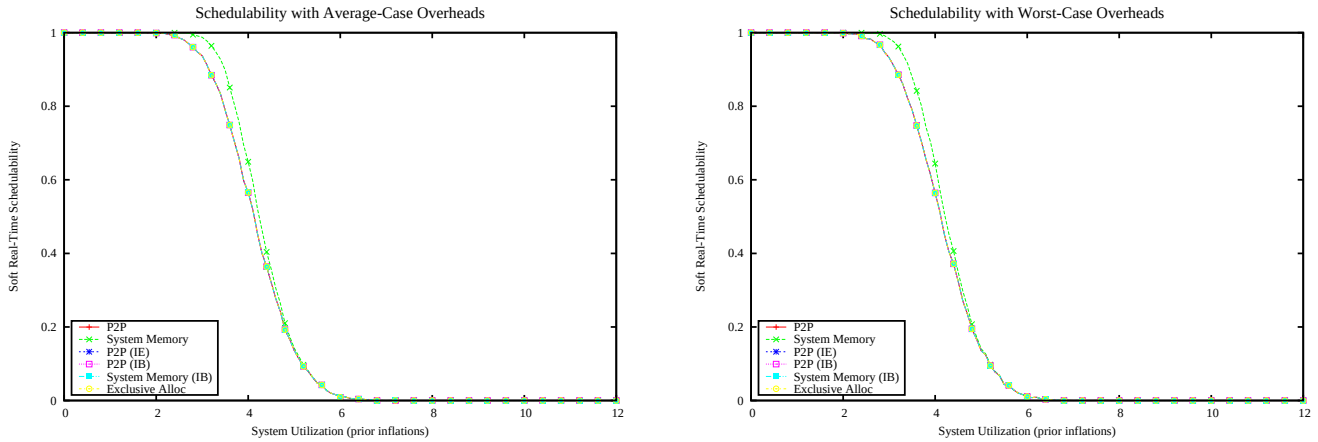

Figure 875: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

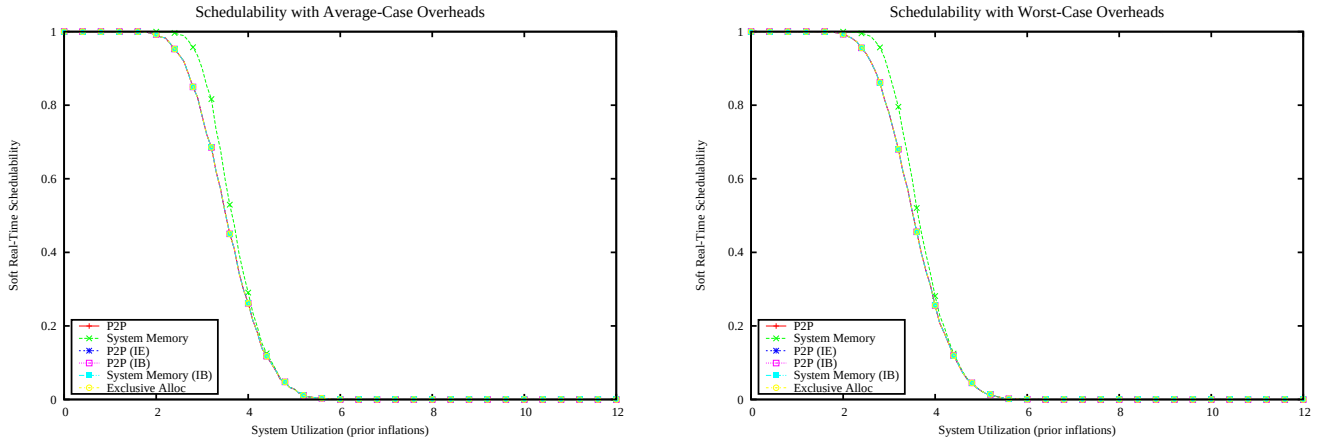

Figure 876: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

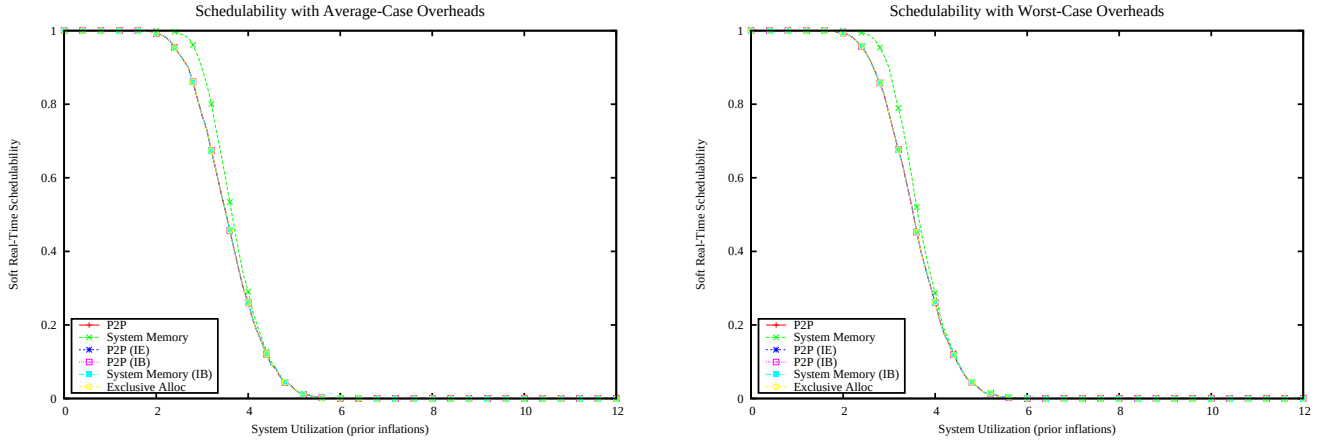

Figure 877: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

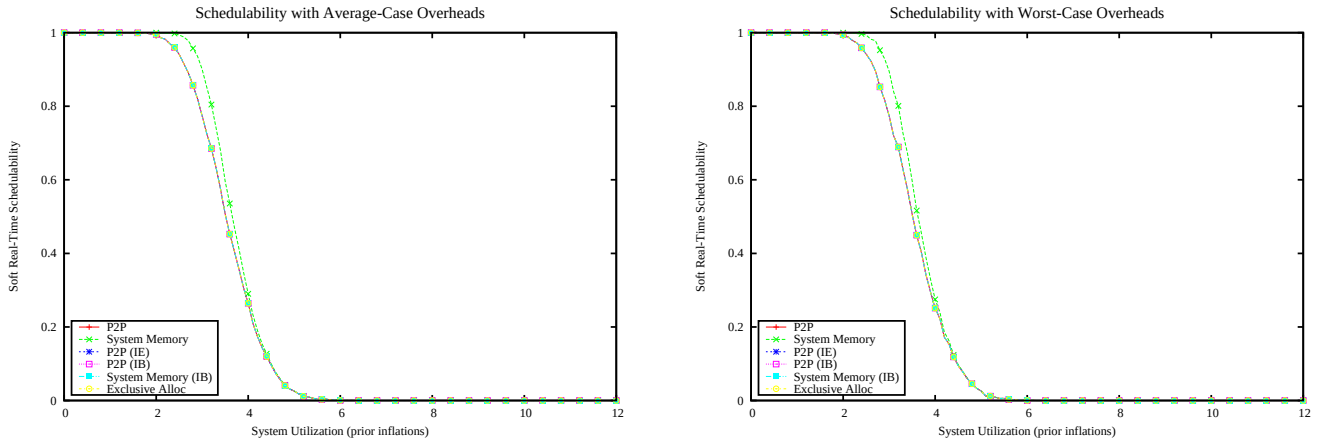

Figure 878: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

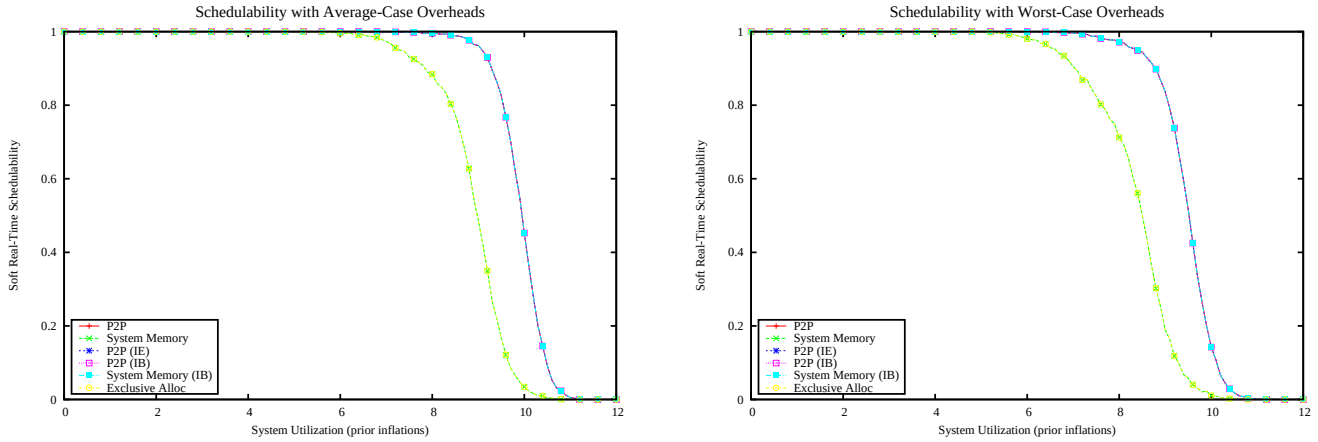

Figure 879: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

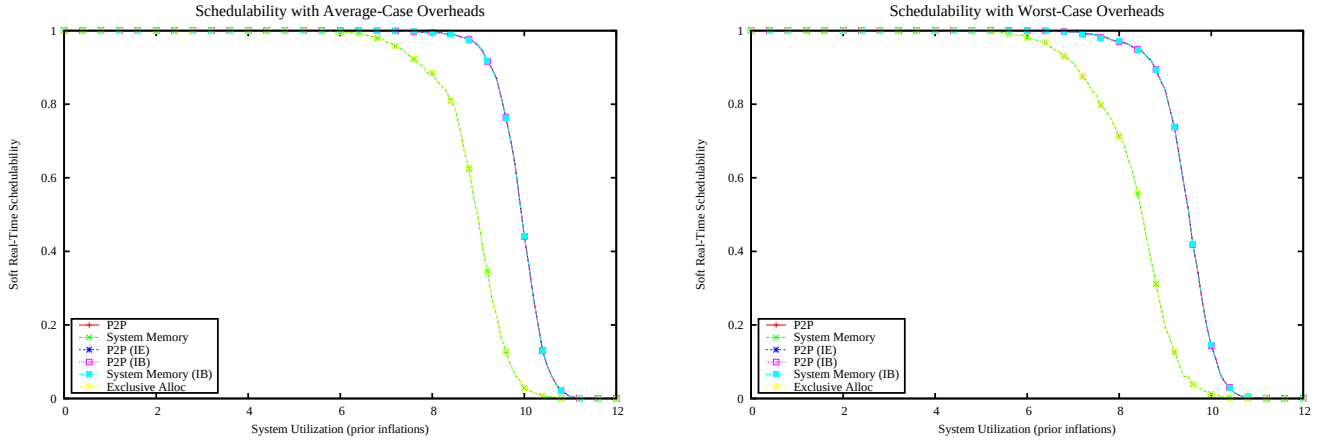

Figure 880: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

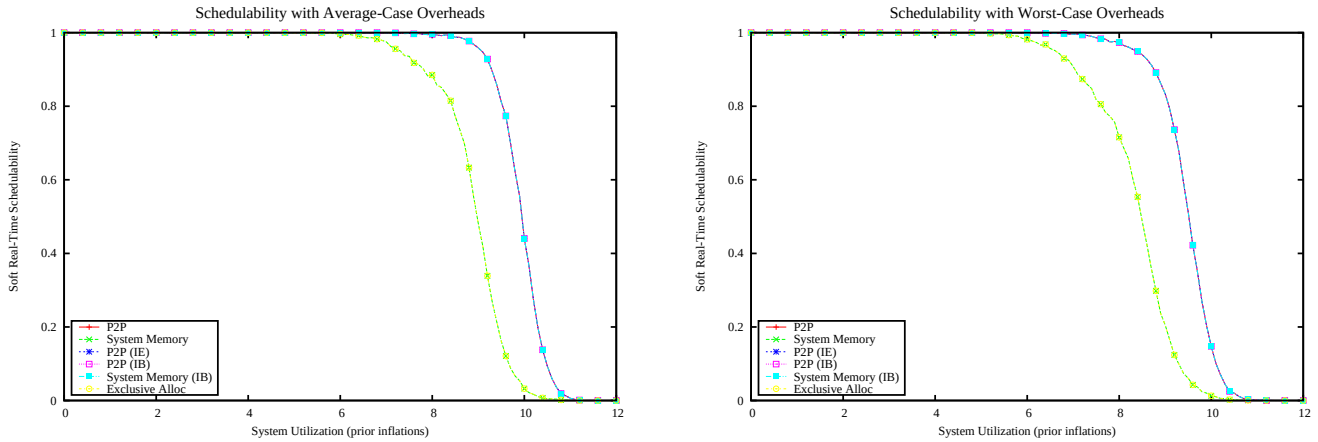

Figure 881: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

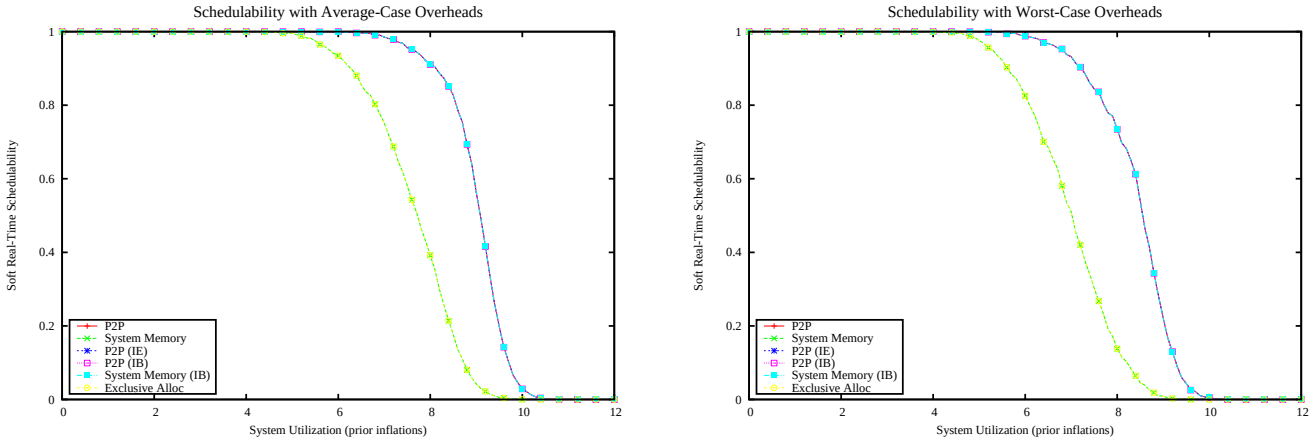

Figure 882: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

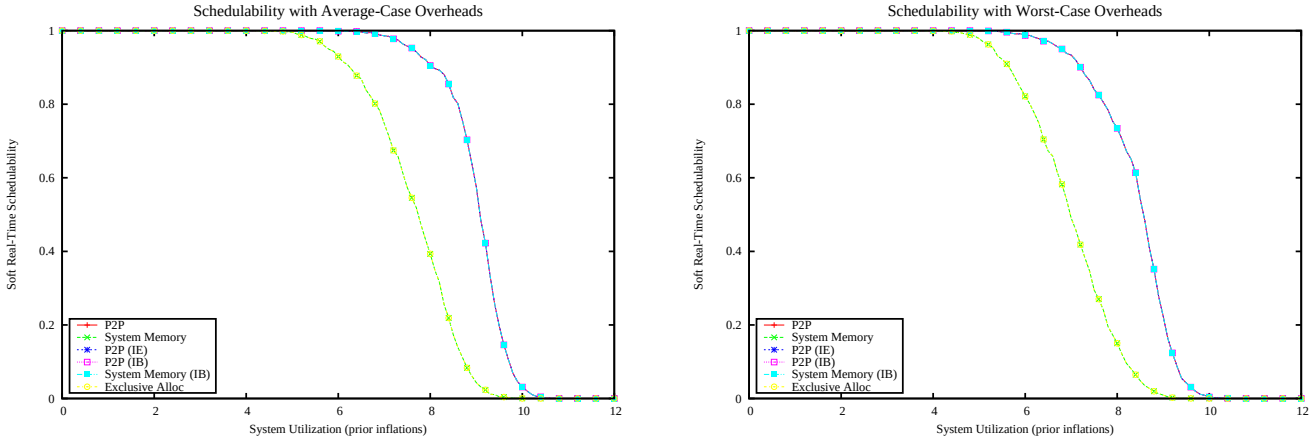

Figure 883: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

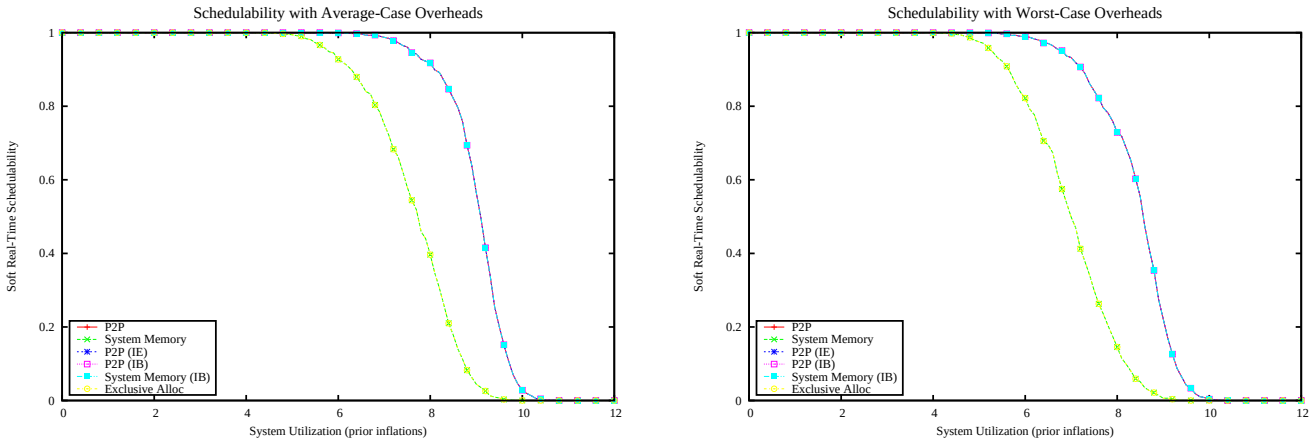

Figure 884: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

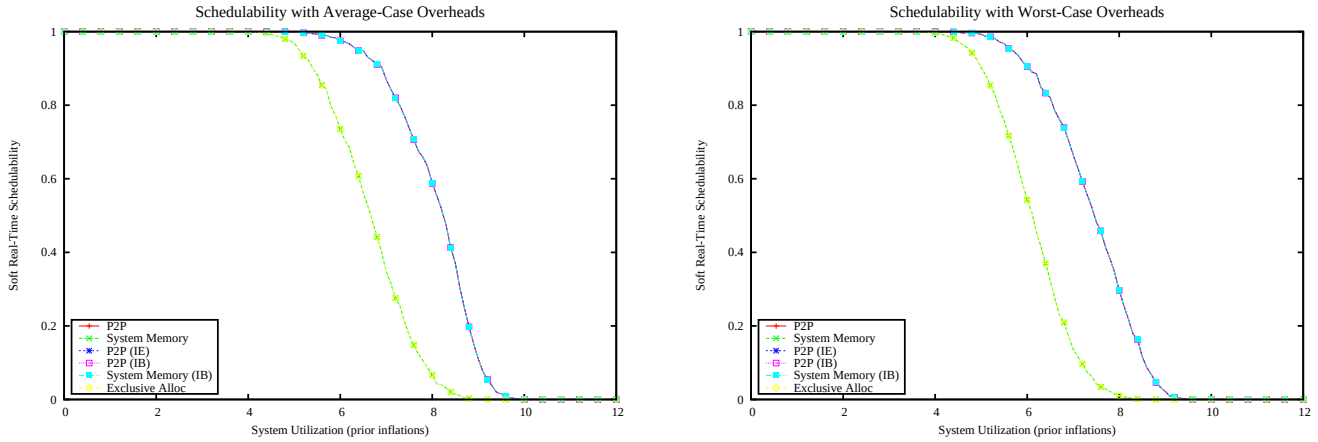

Figure 885: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

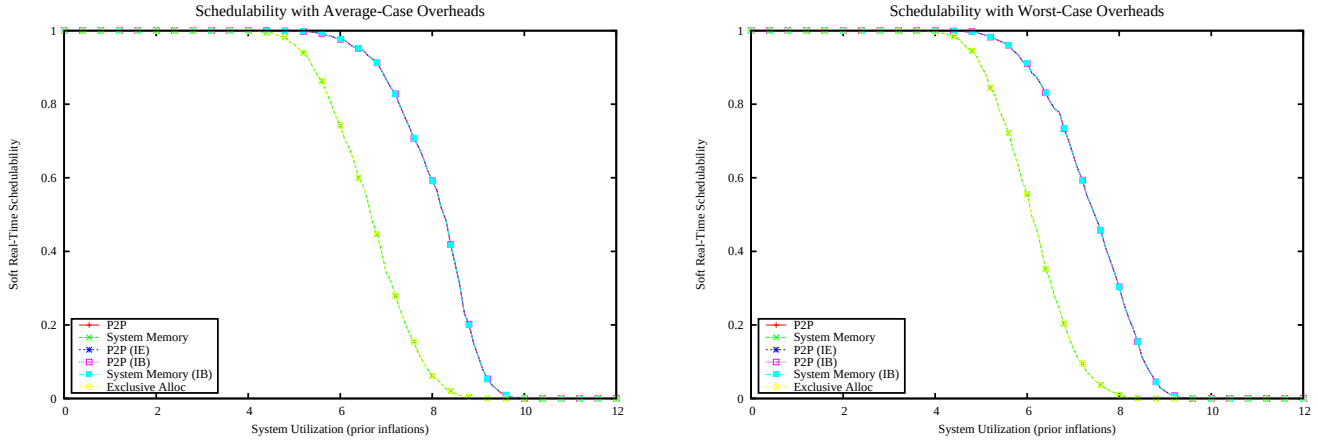

Figure 886: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

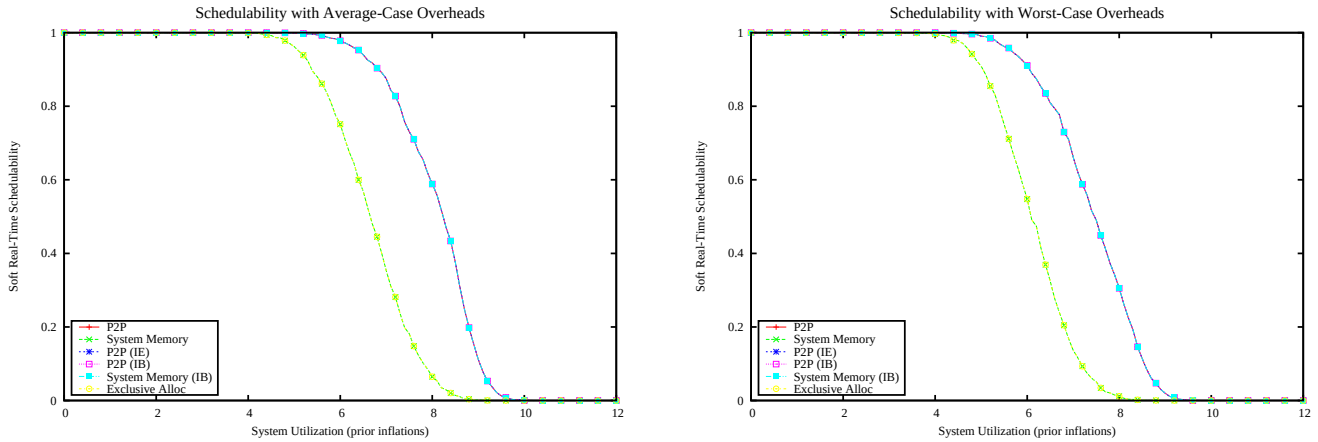

Figure 887: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

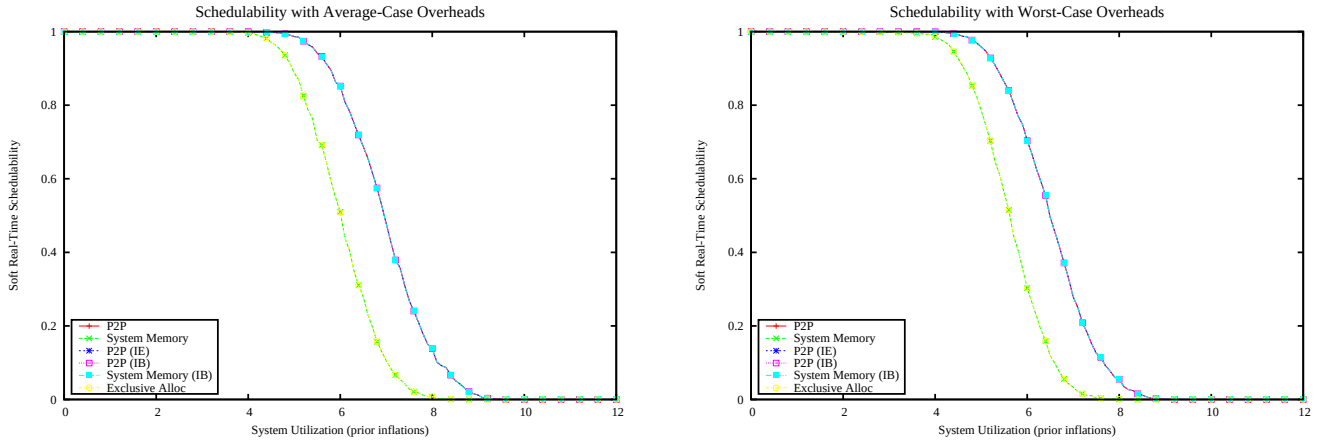

Figure 888: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

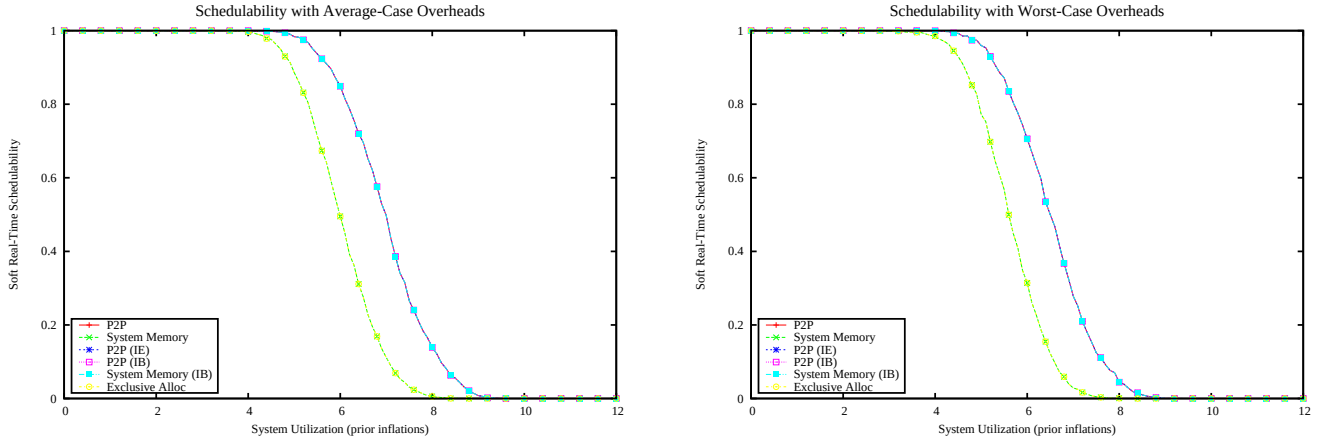

Figure 889: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

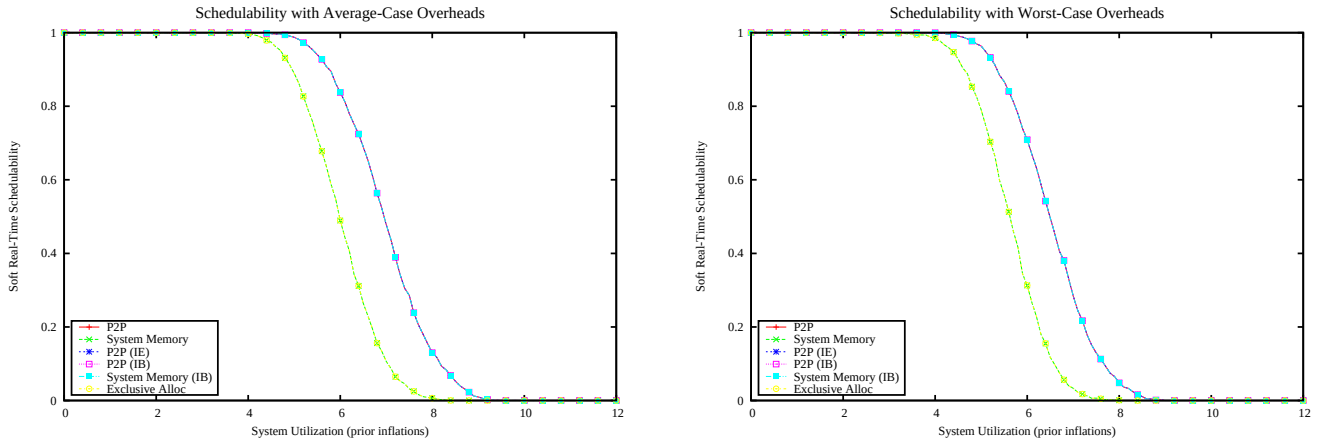

Figure 890: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

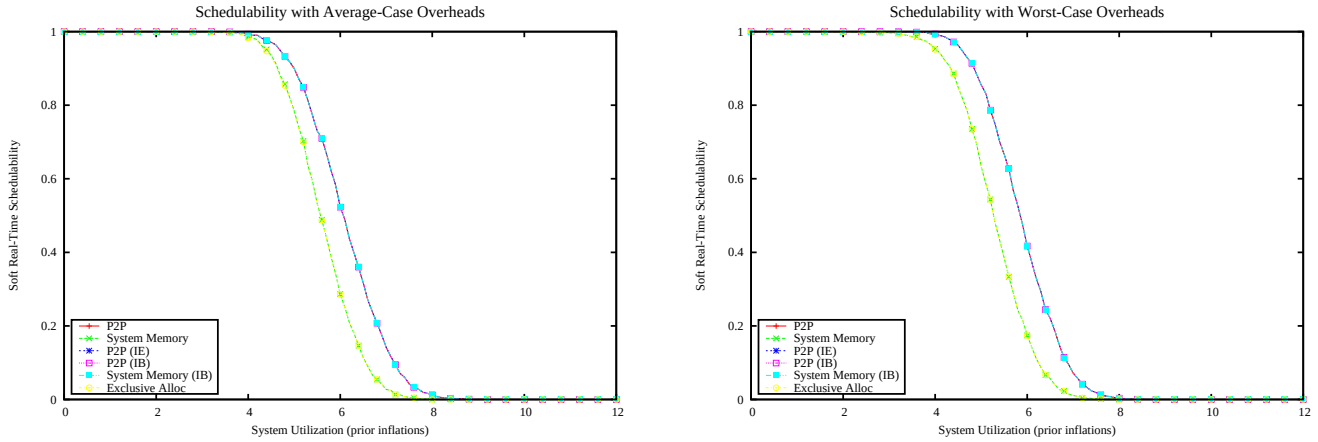

Figure 891: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

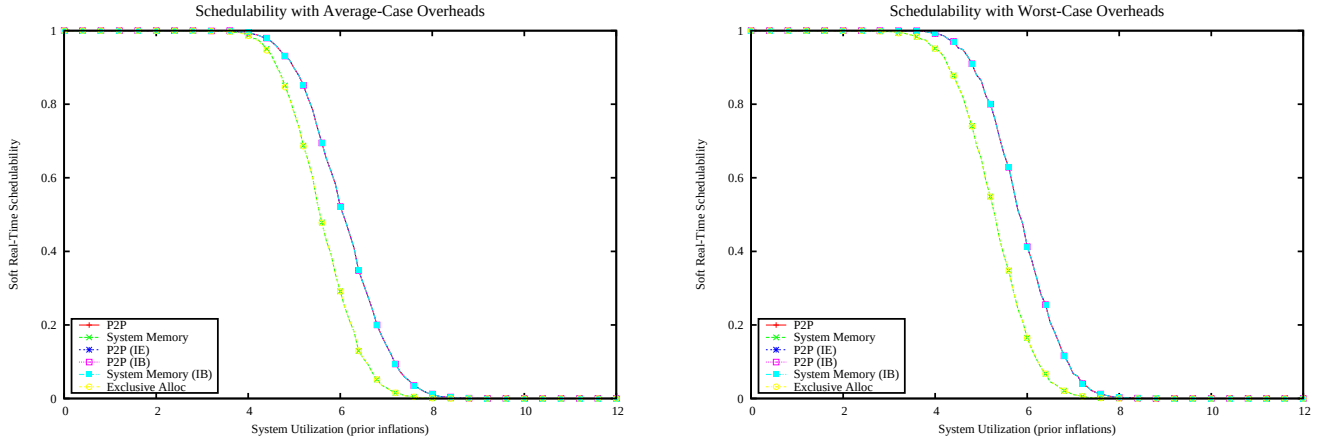

Figure 892: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

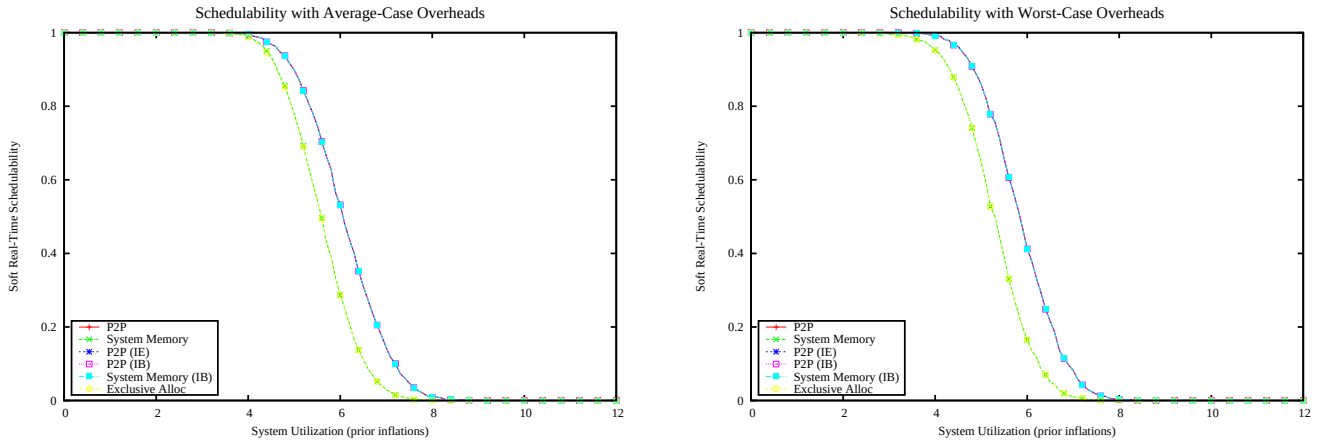

Figure 893: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

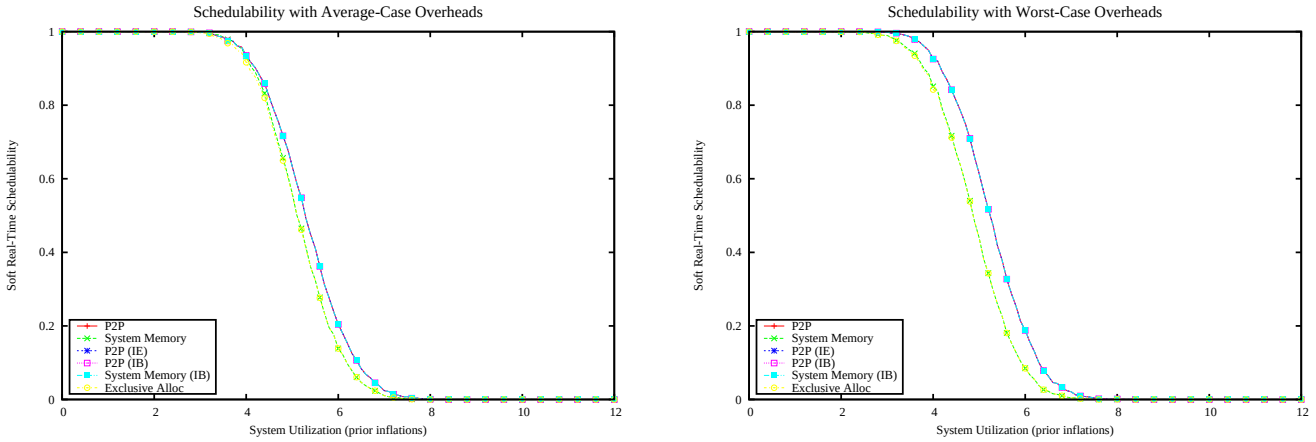

Figure 894: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

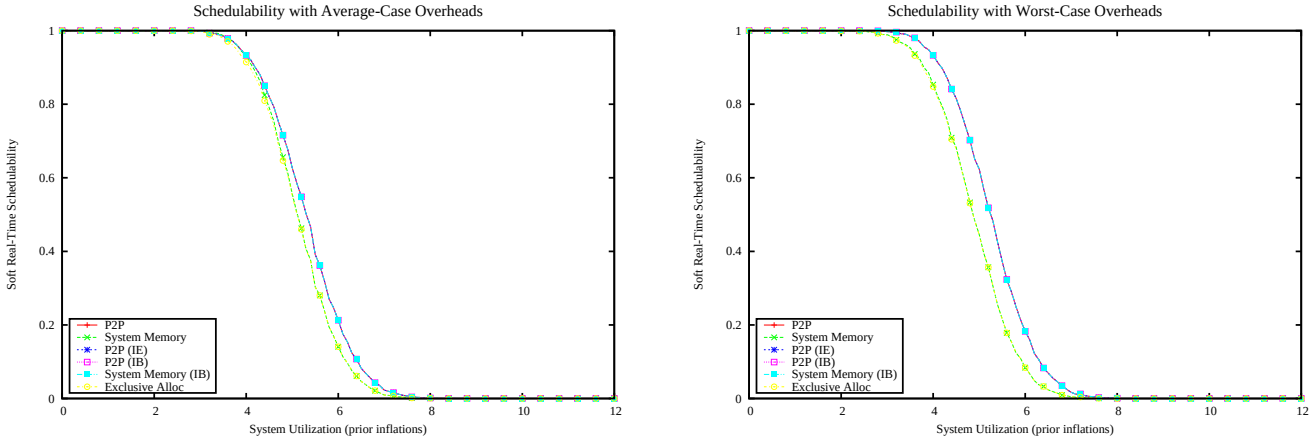

Figure 895: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

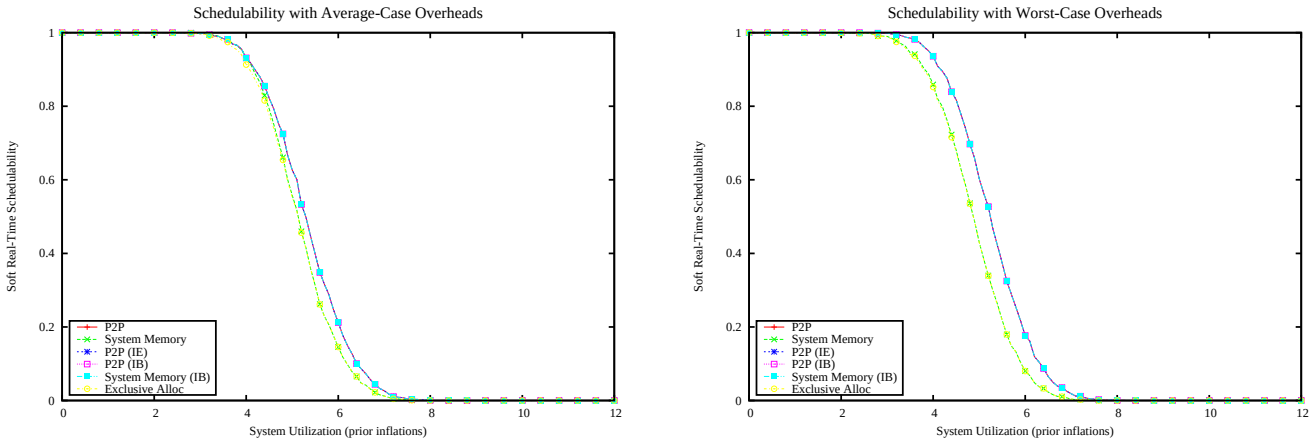

Figure 896: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

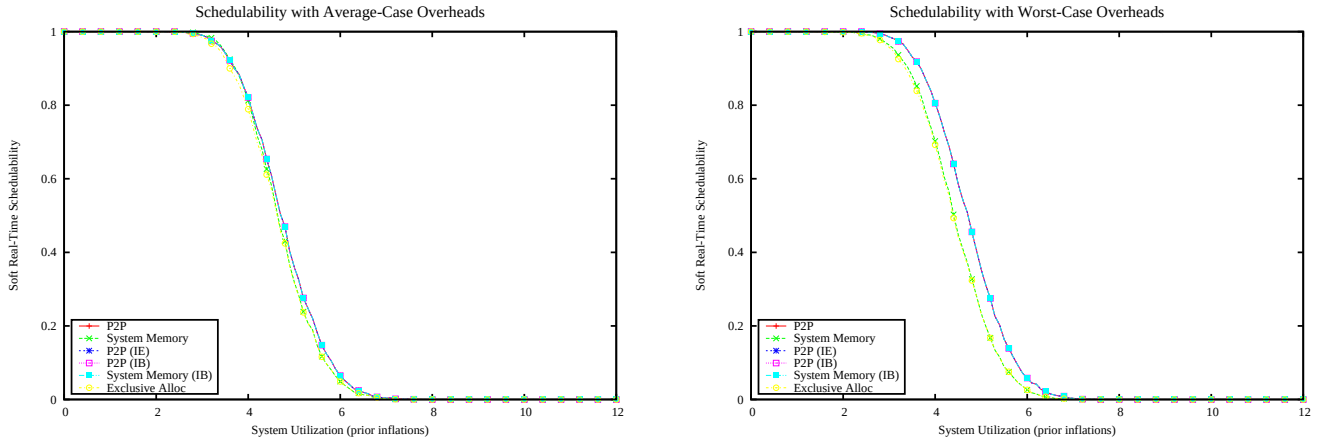

Figure 897: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

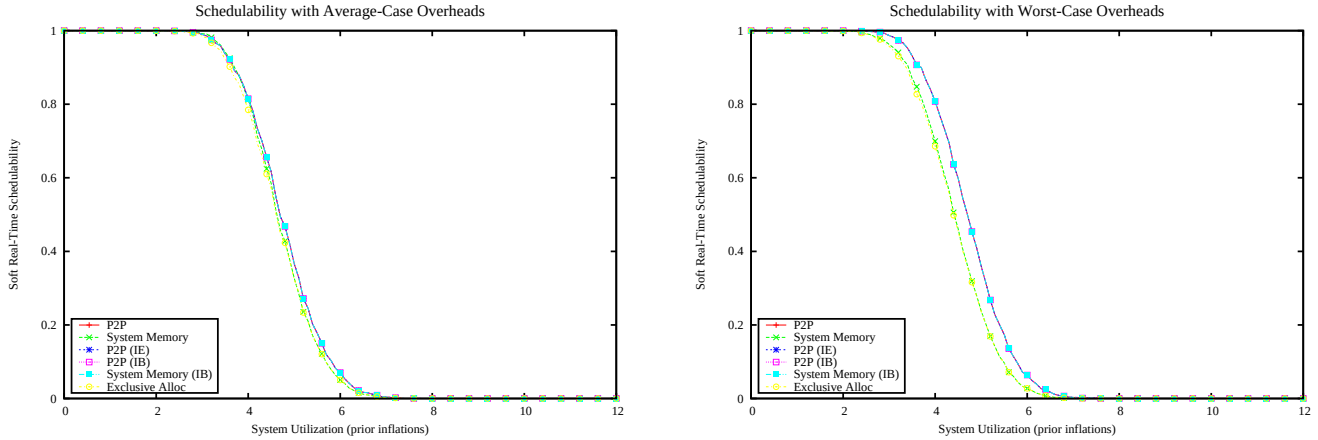

Figure 898: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

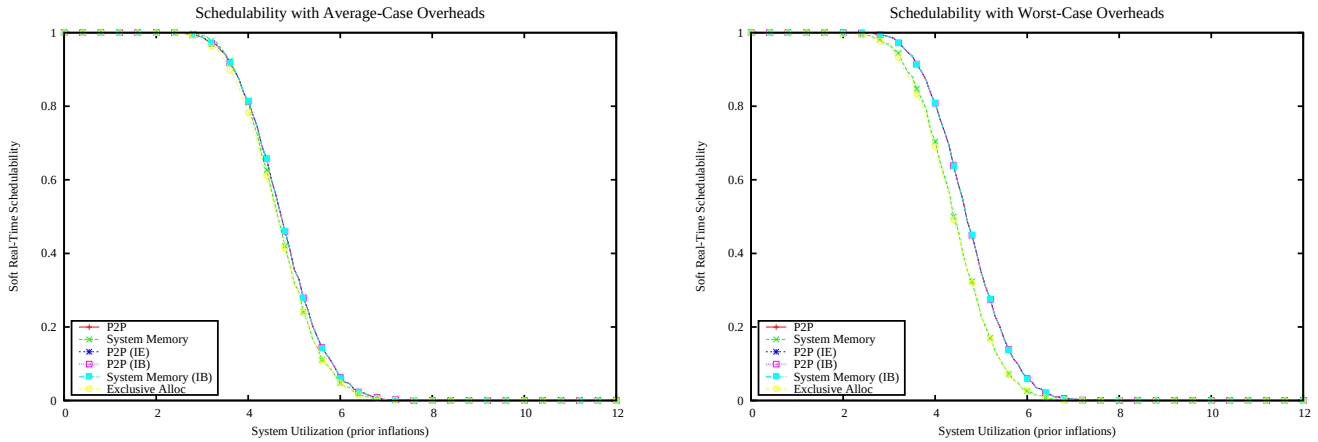

Figure 899: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

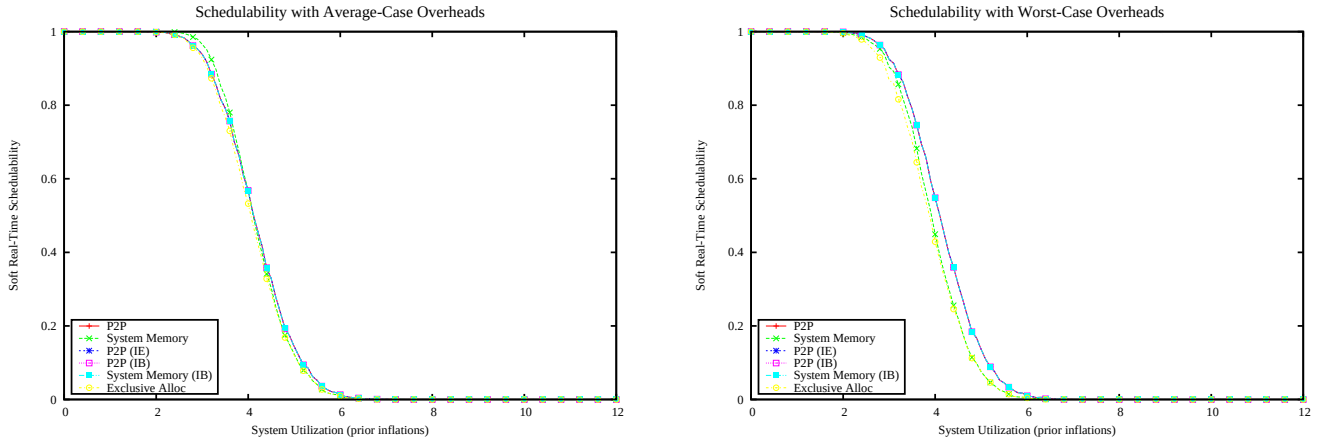

Figure 900: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

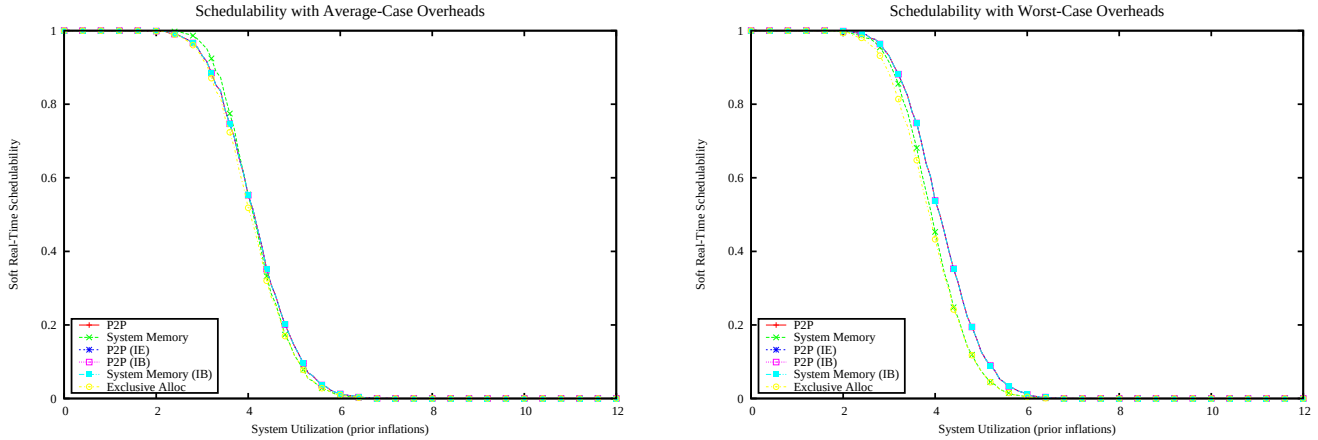

Figure 901: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

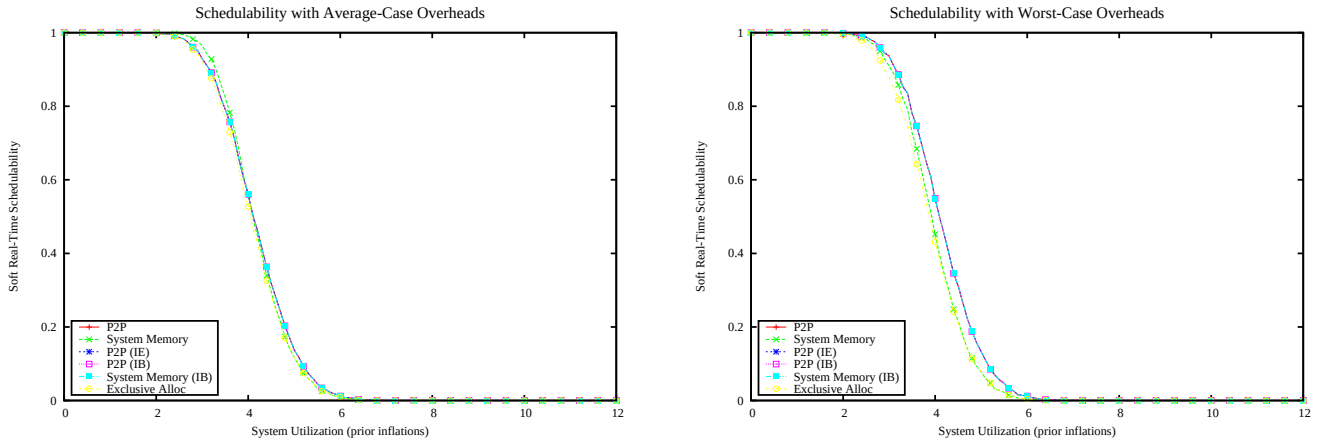

Figure 902: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

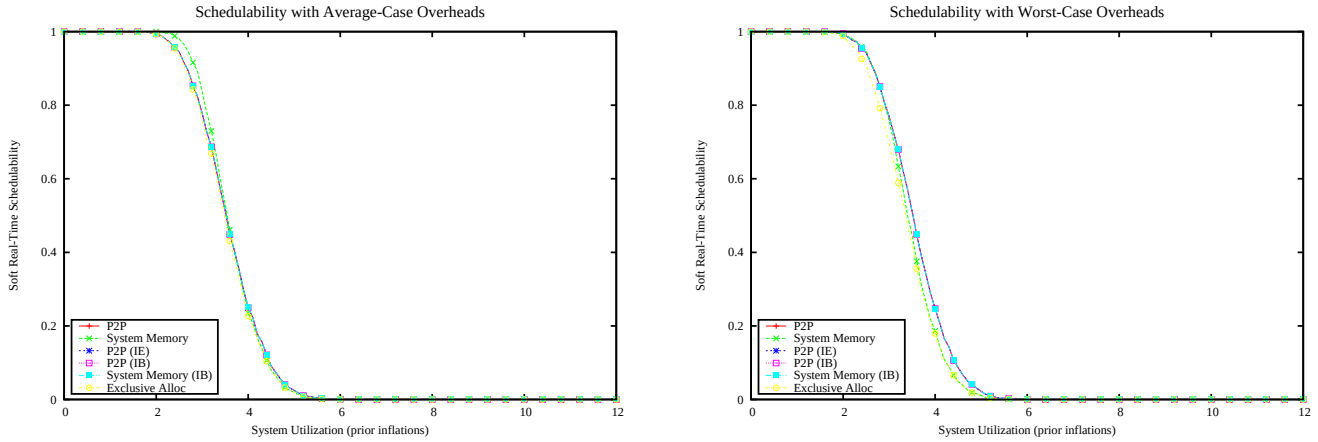

Figure 903: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

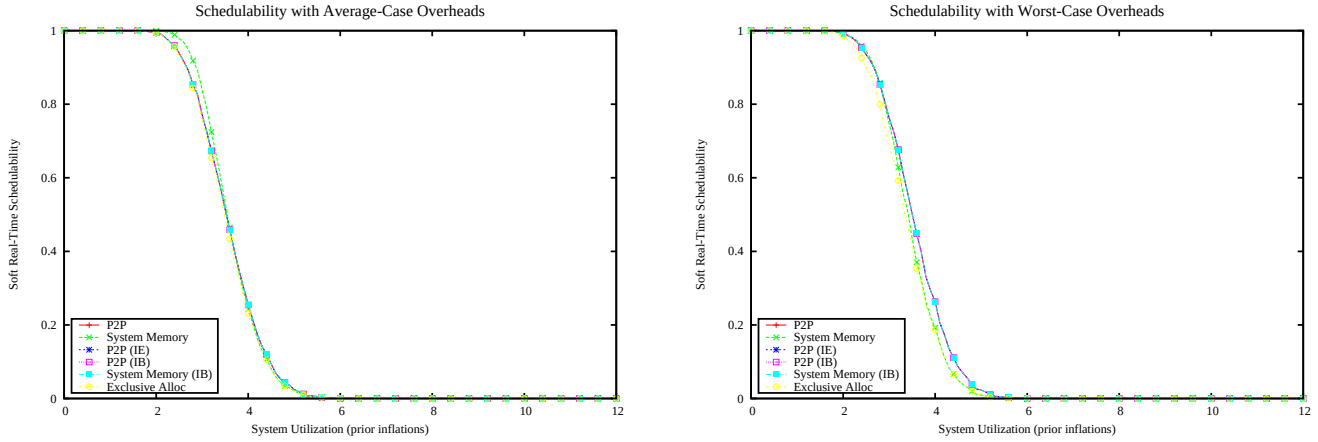

Figure 904: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

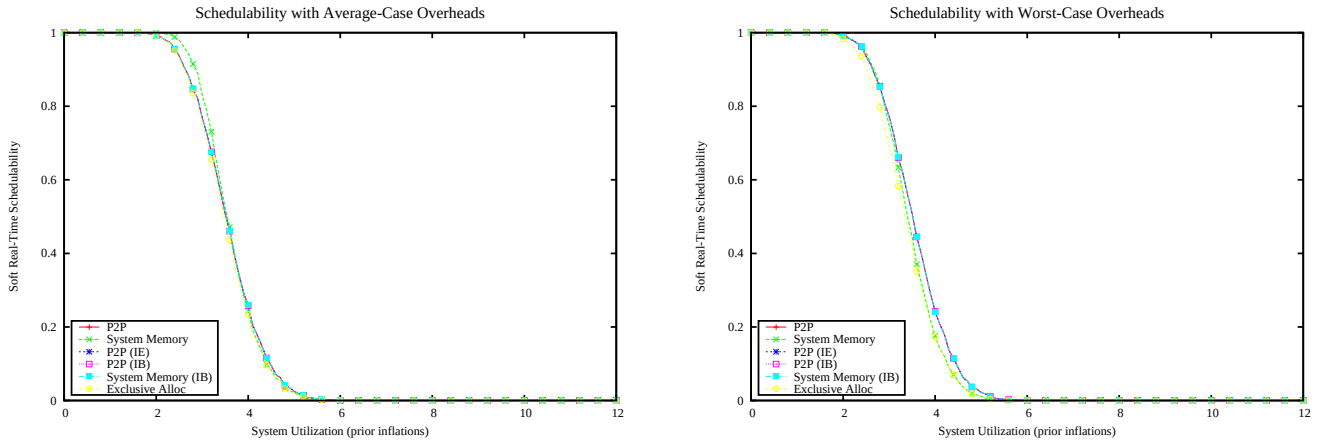

Figure 905: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

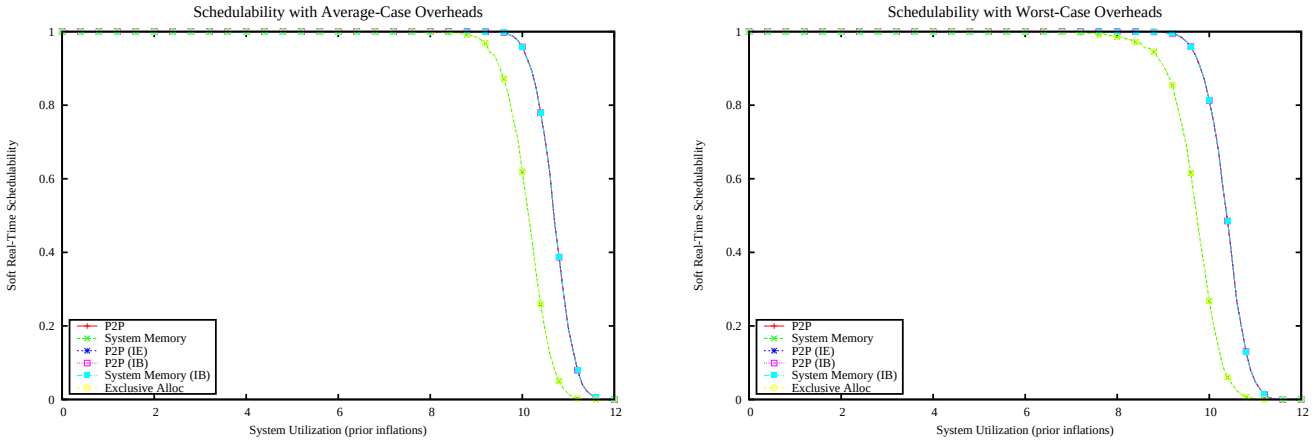

Figure 906: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

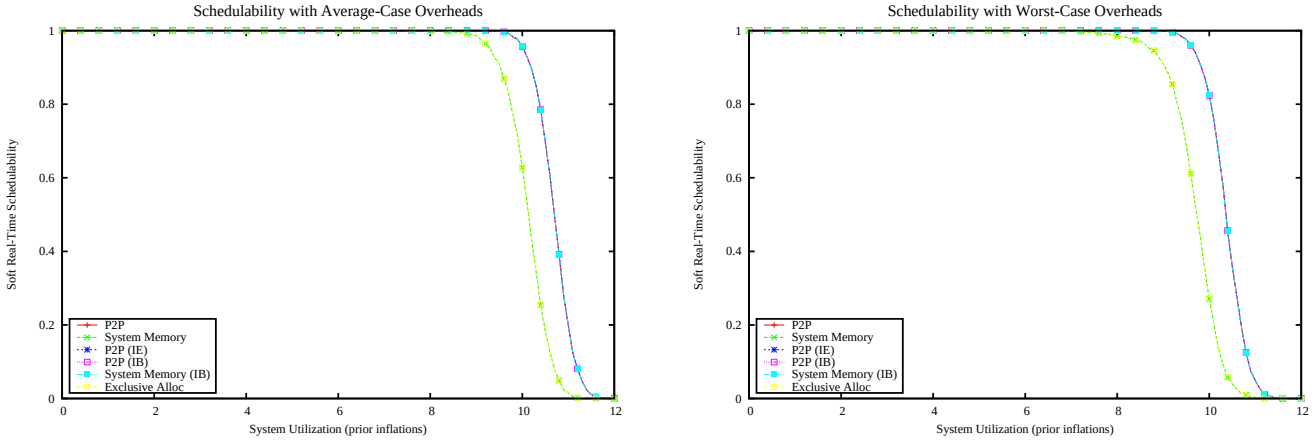

Figure 907: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

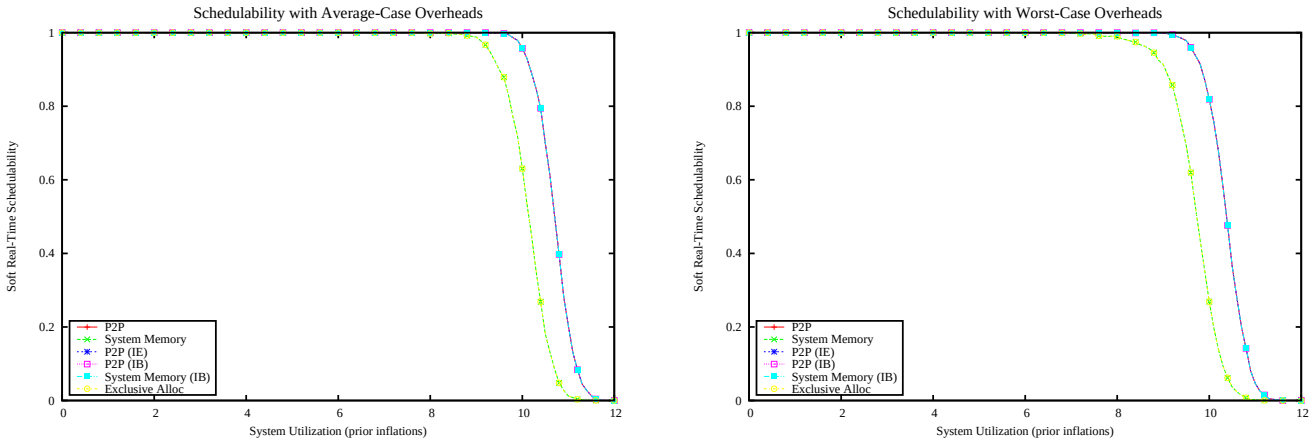

Figure 908: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

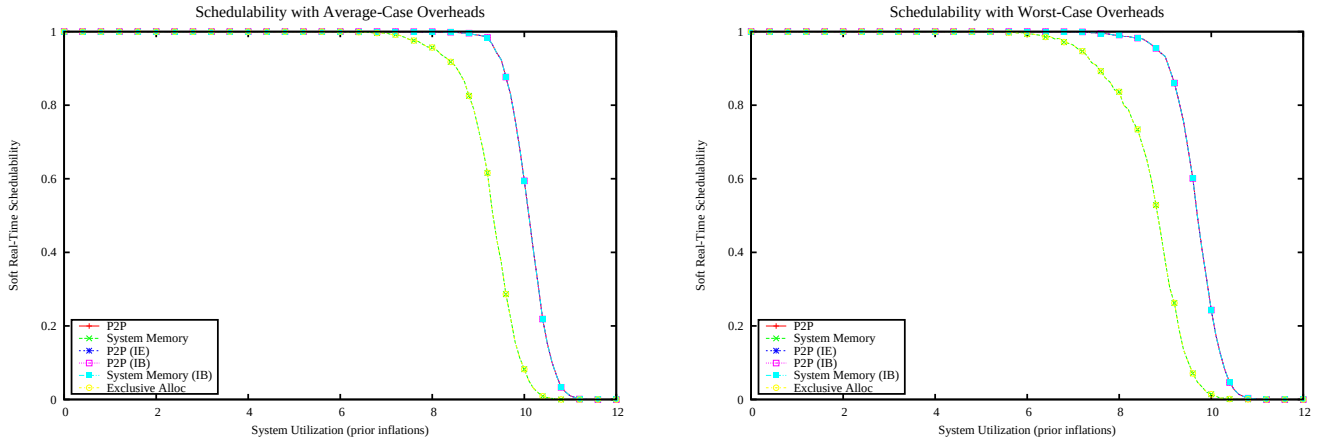

Figure 909: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

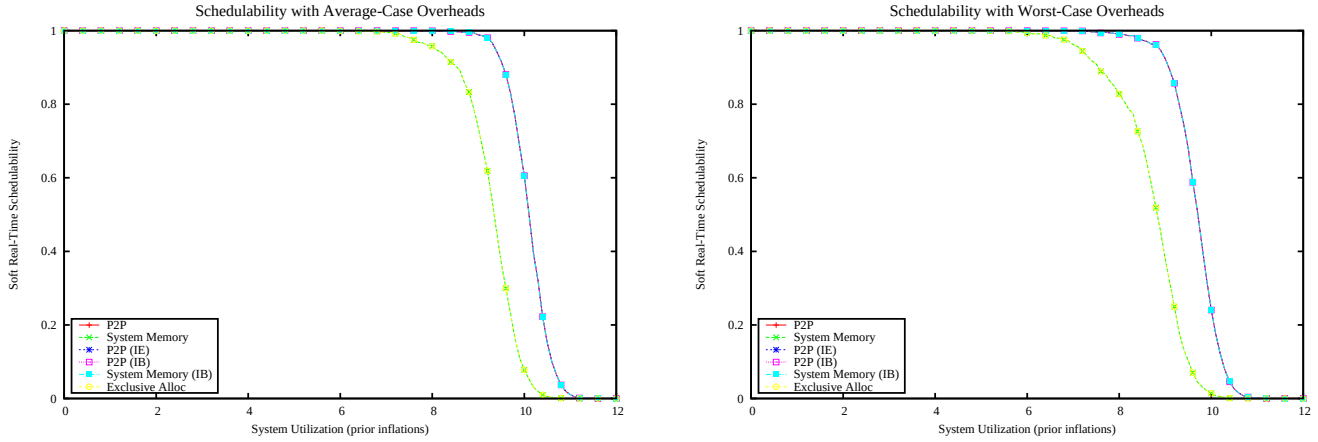

Figure 910: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

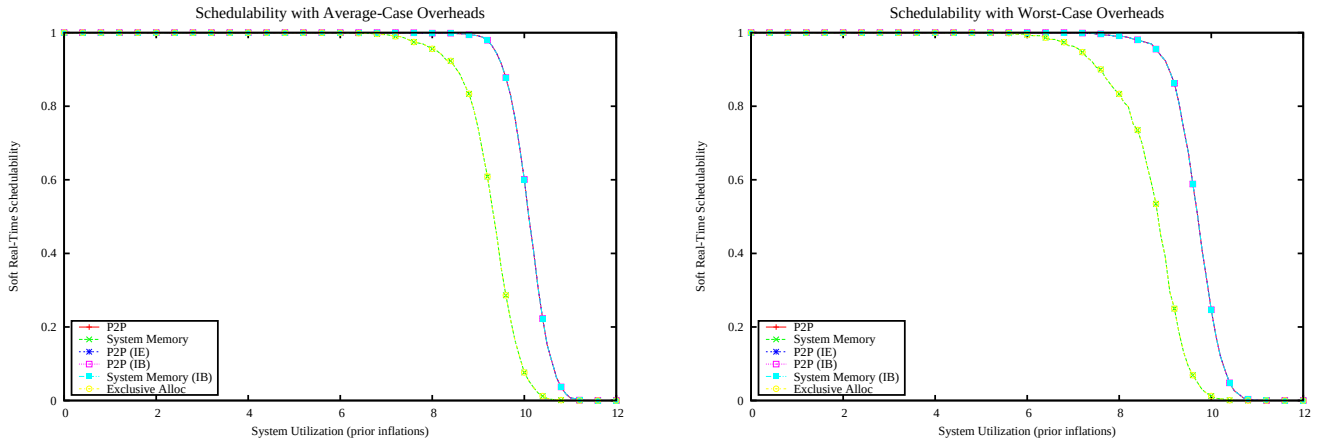

Figure 911: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

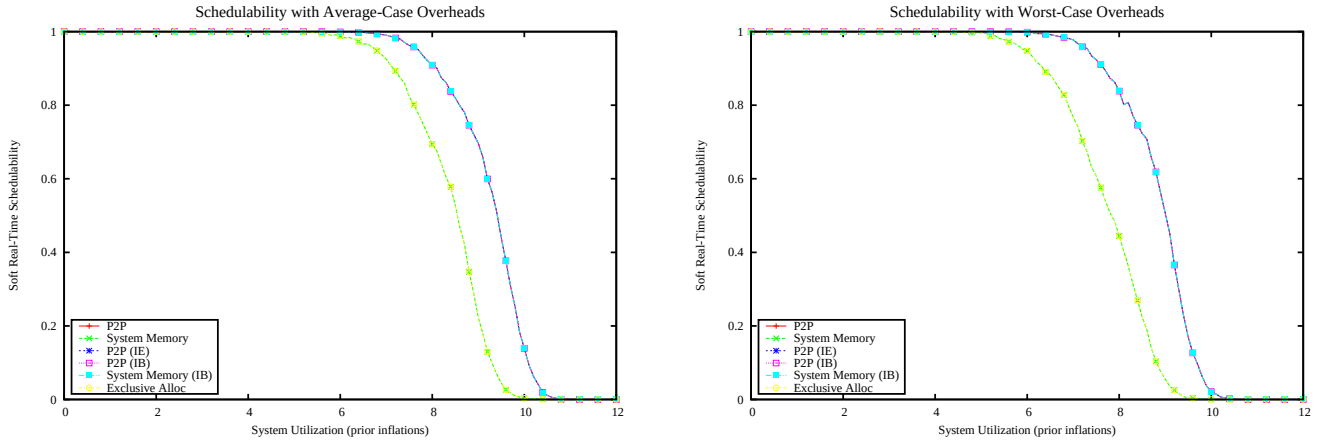

Figure 912: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

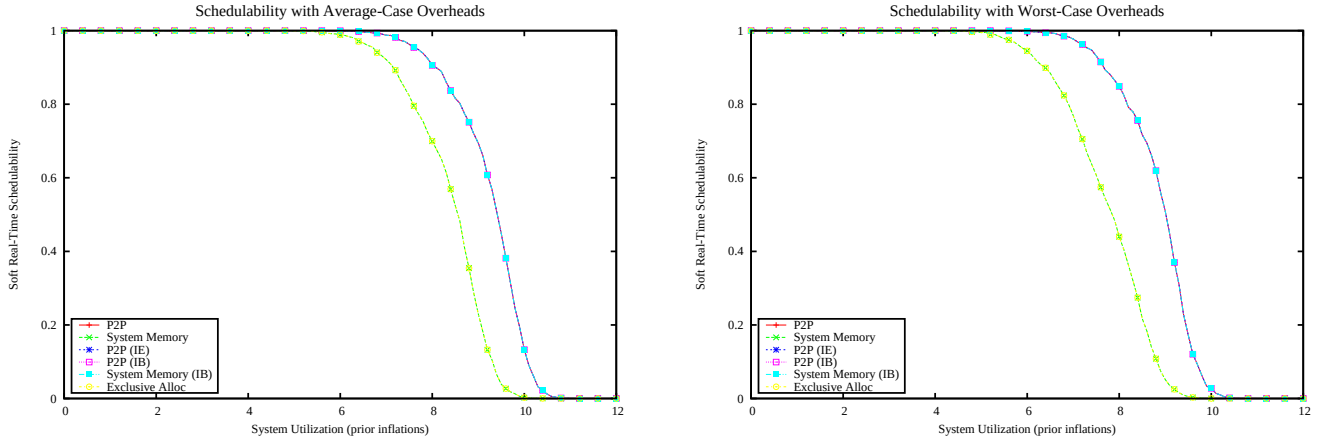

Figure 913: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

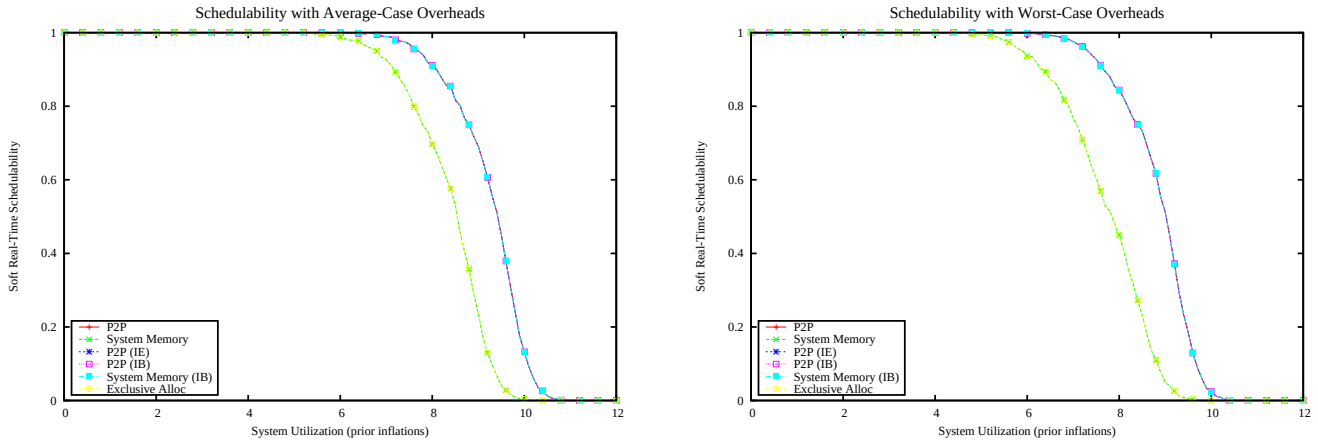

Figure 914: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

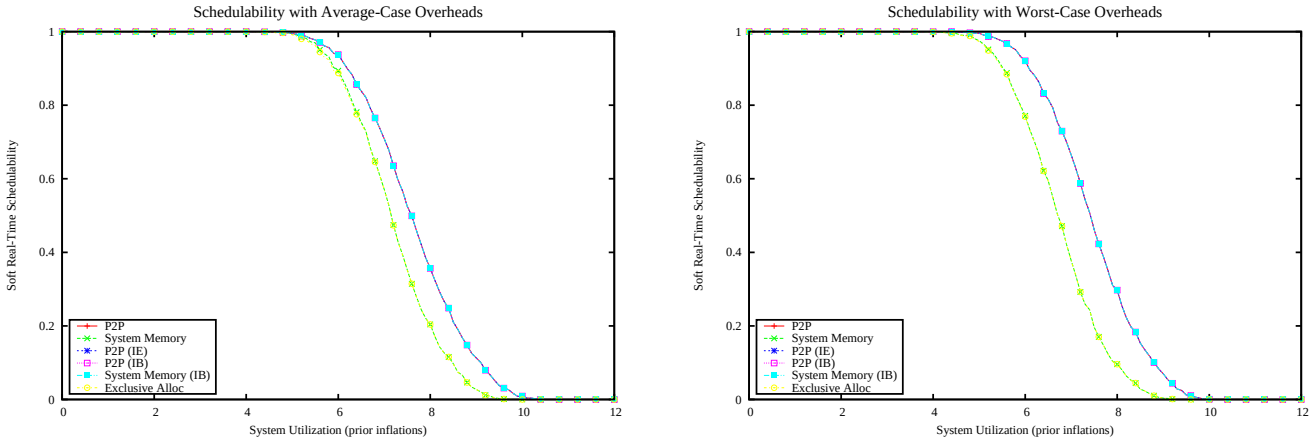

Figure 915: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

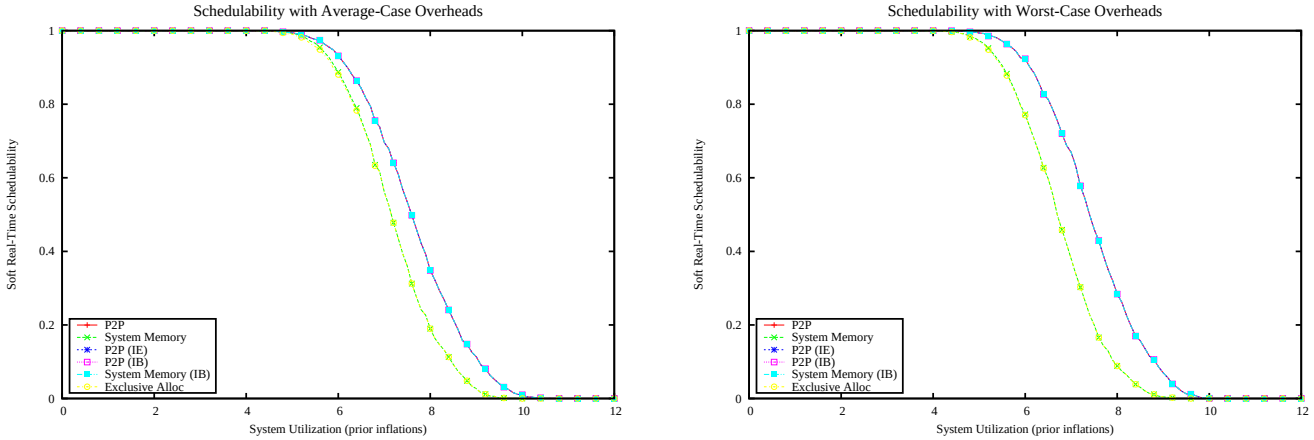

Figure 916: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

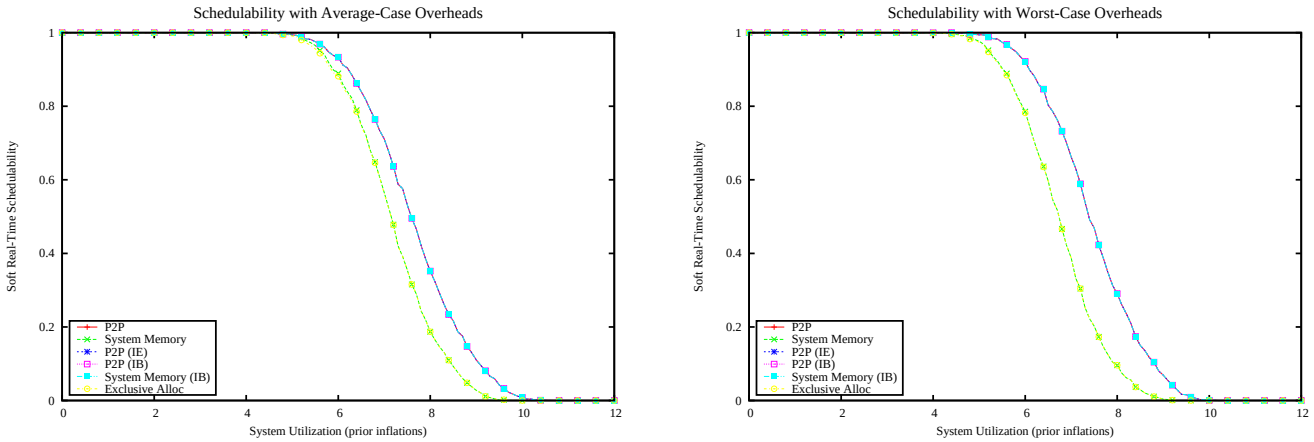

Figure 917: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

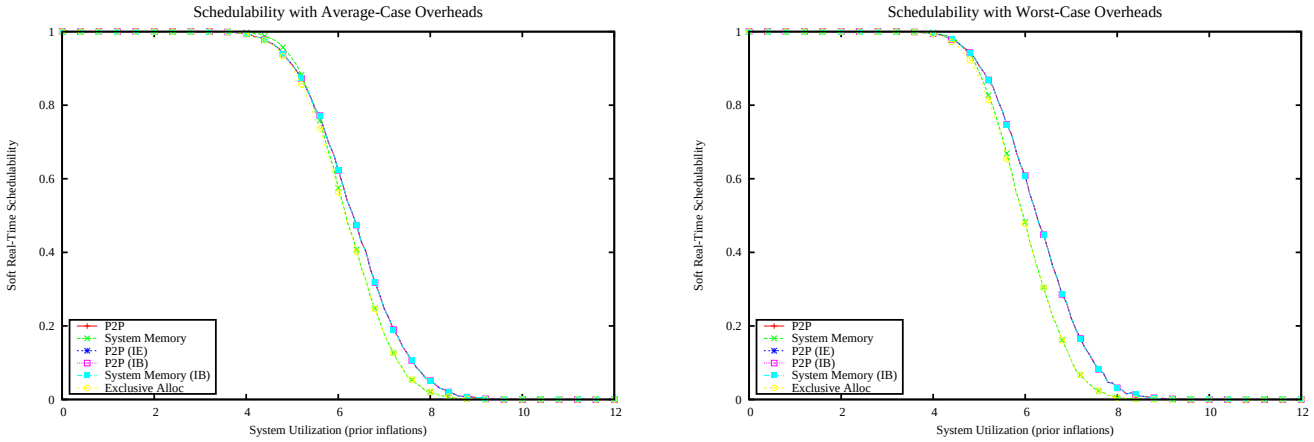

Figure 918: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

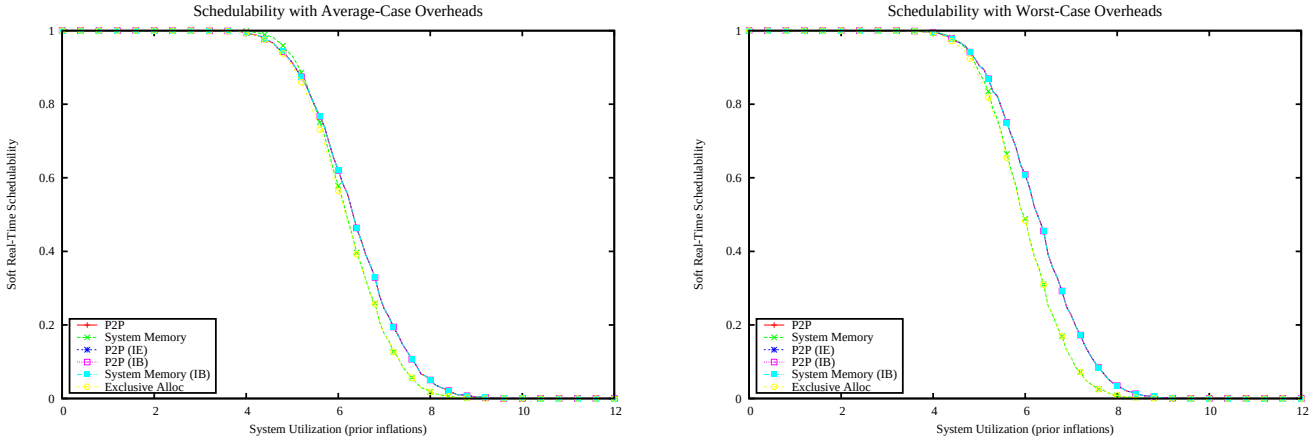

Figure 919: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

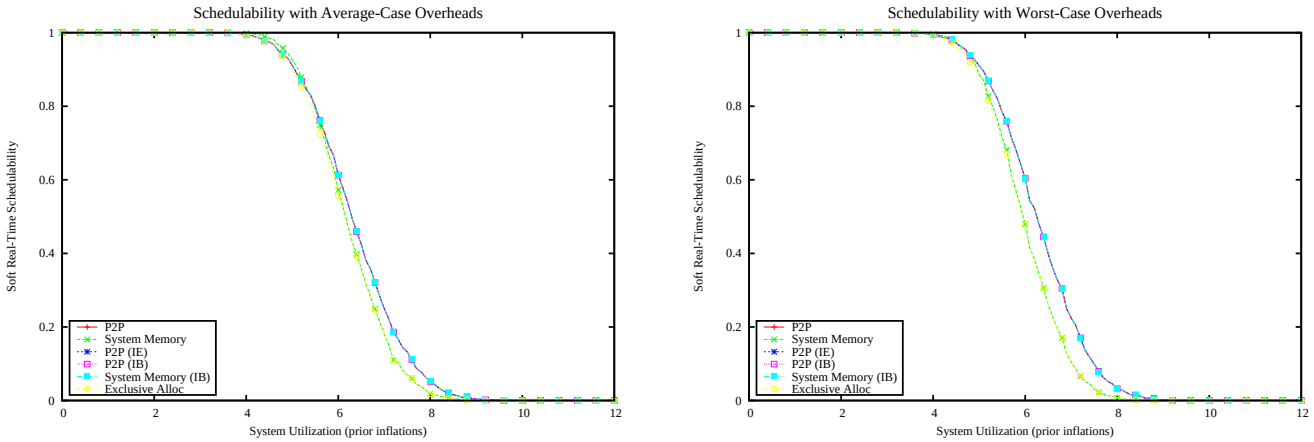

Figure 920: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

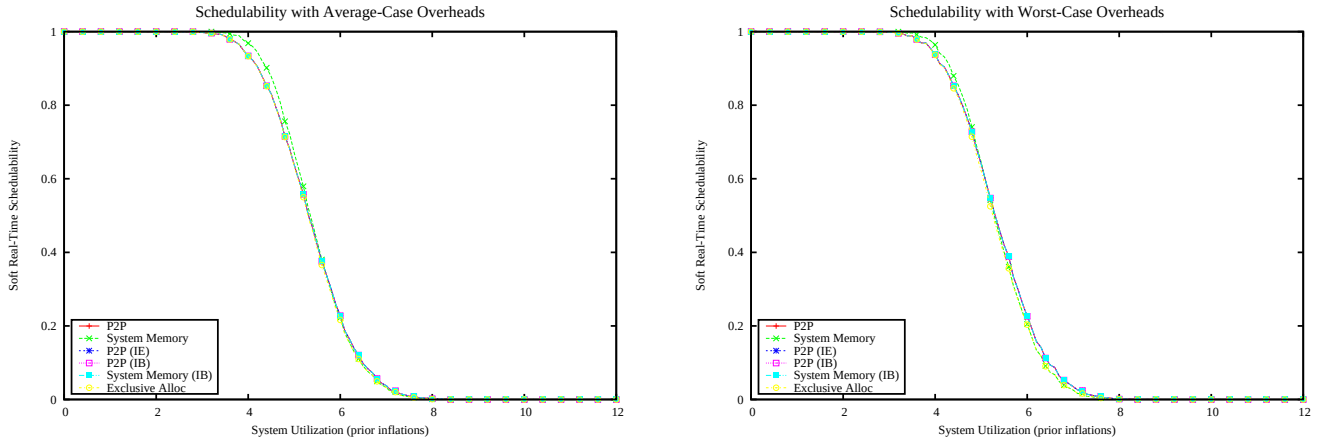

Figure 921: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

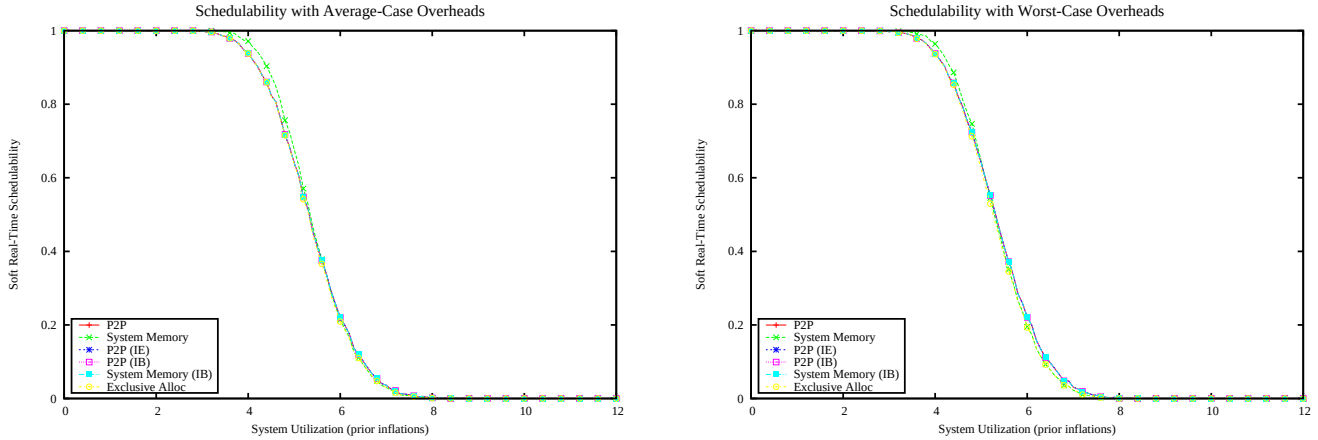

Figure 922: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

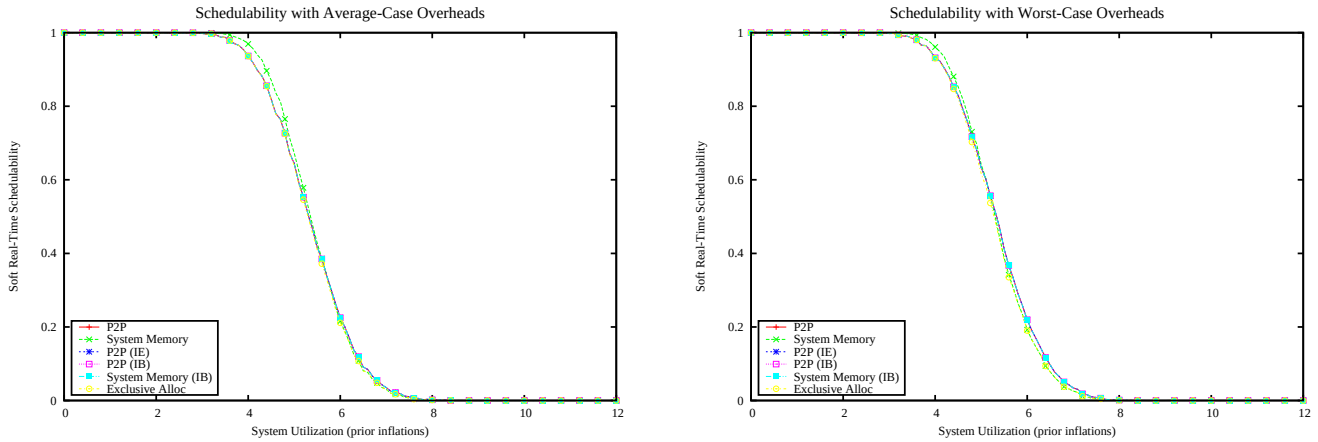

Figure 923: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

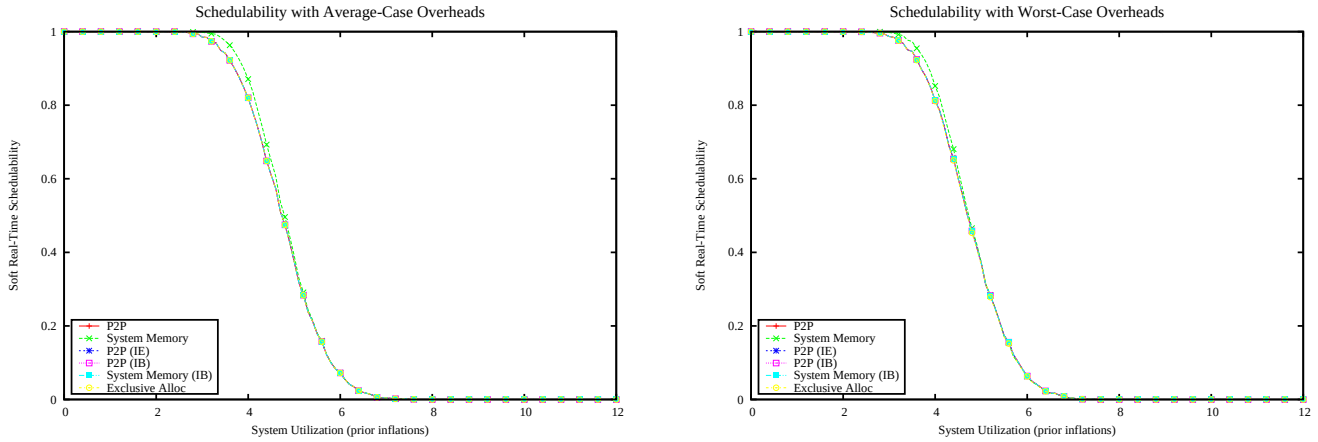

Figure 924: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

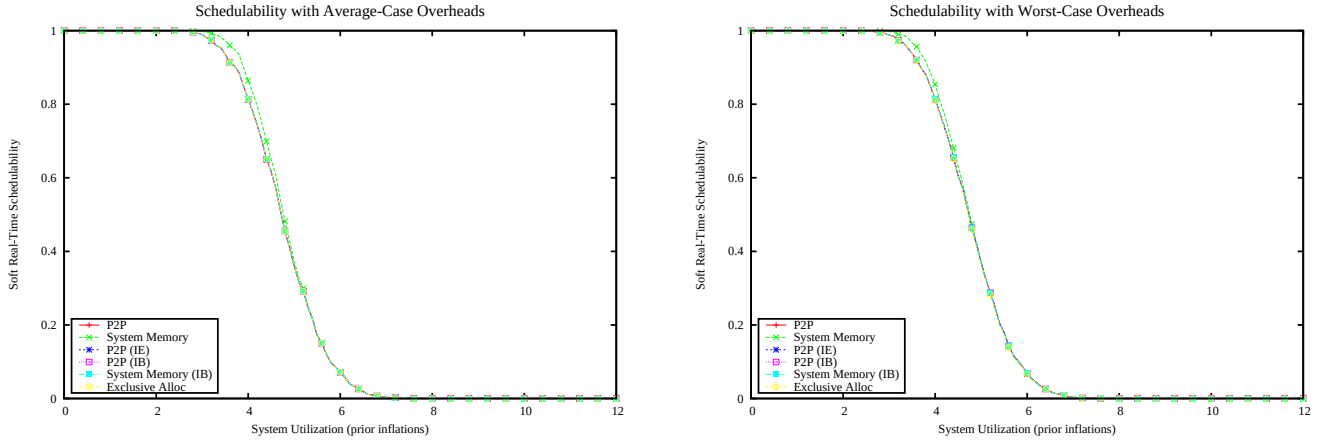

Figure 925: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

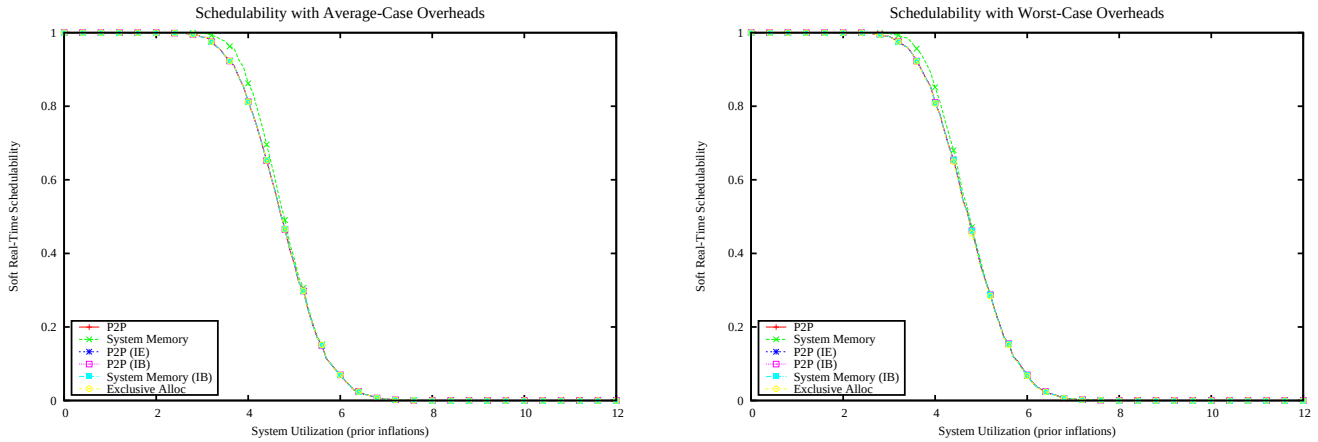

Figure 926: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

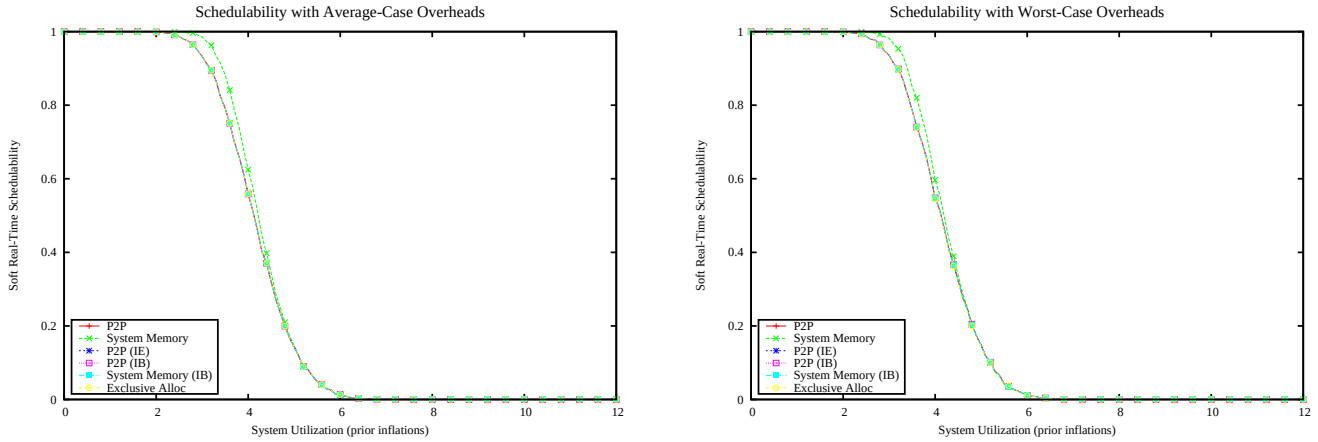

Figure 927: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

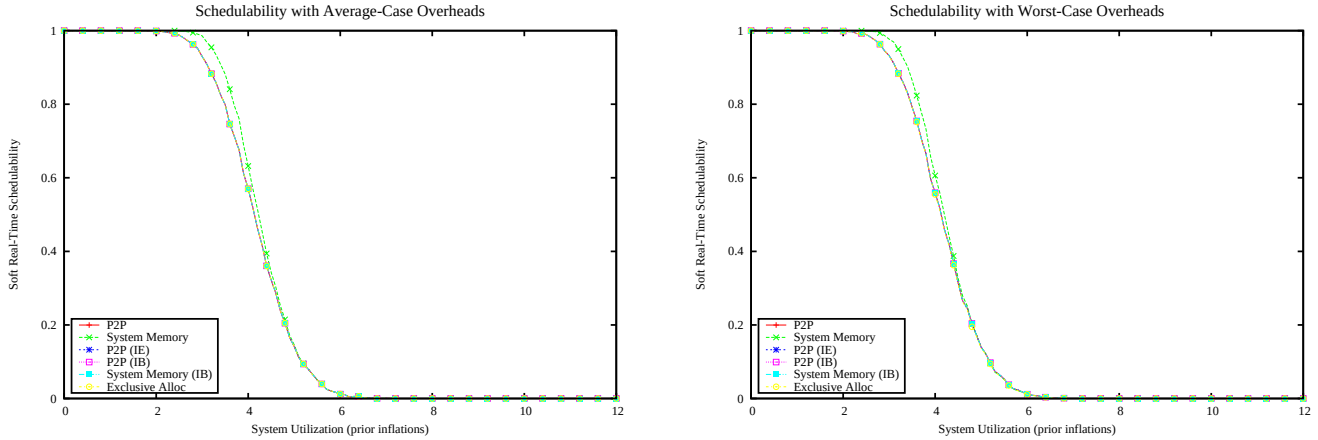

Figure 928: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

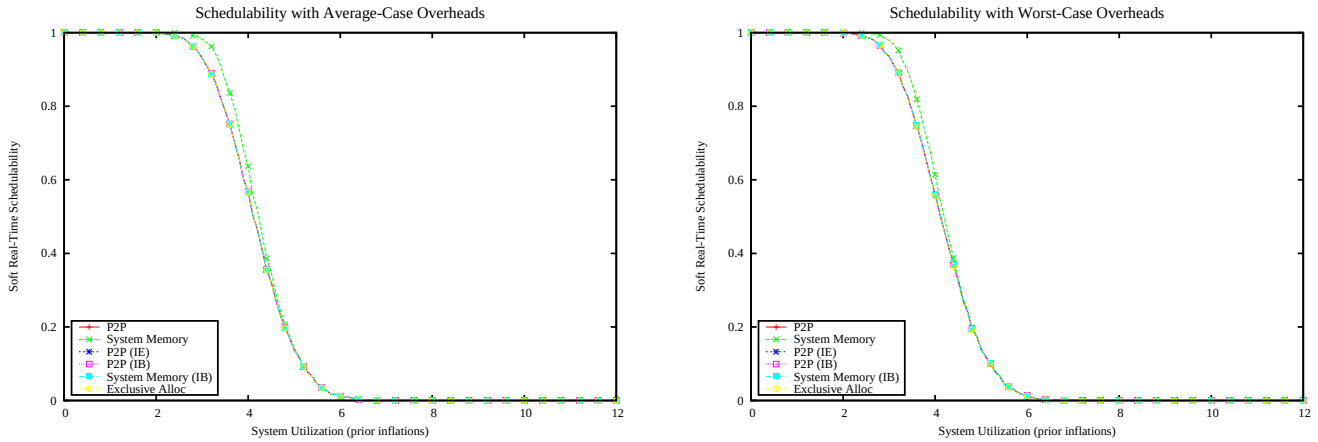

Figure 929: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

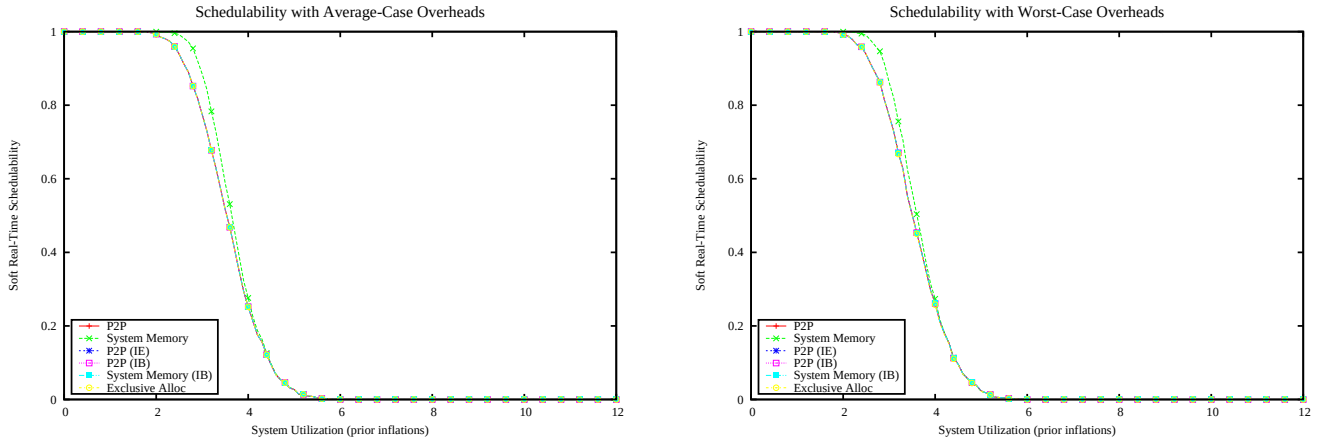

Figure 930: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

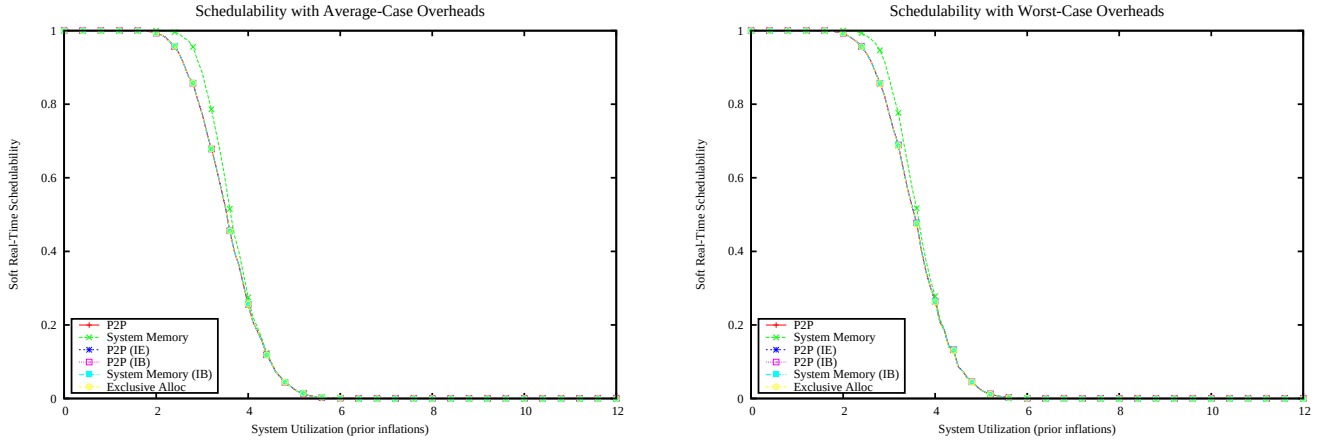

Figure 931: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

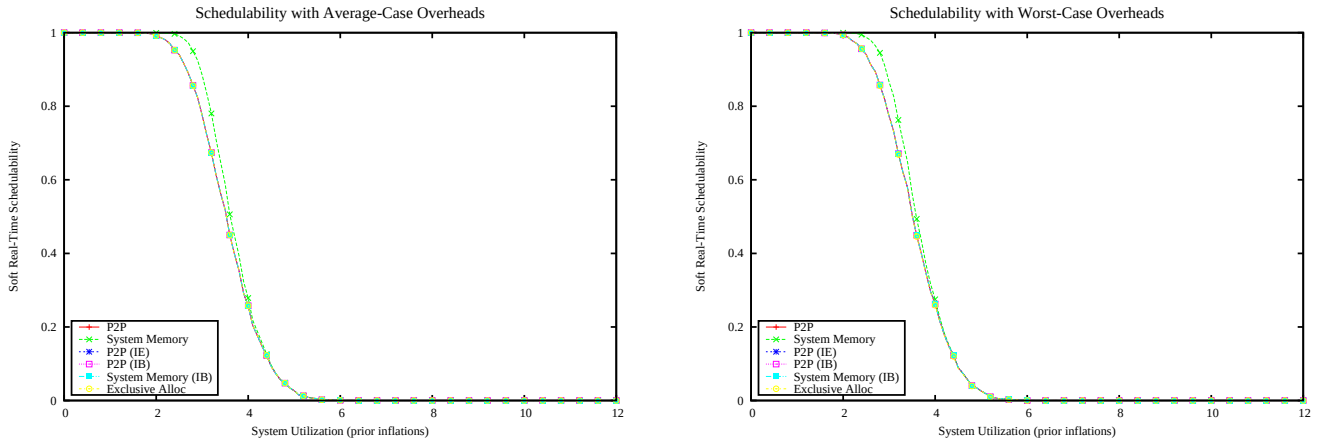

Figure 932: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

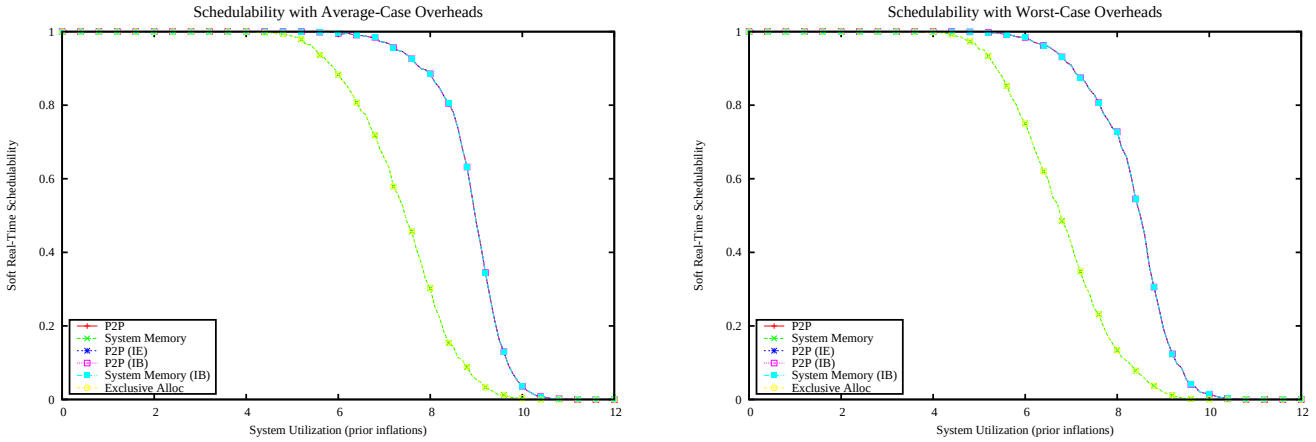

Figure 933: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

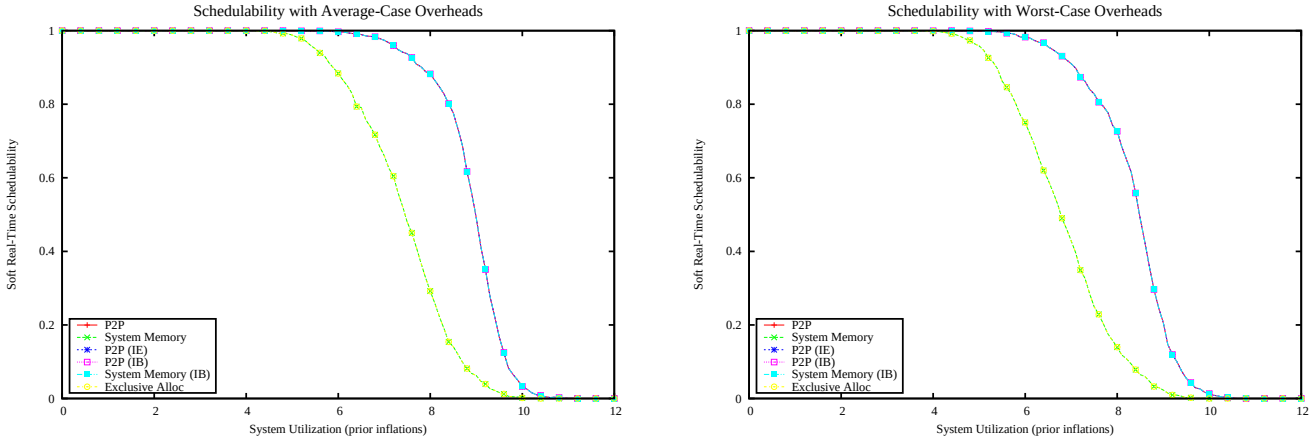

Figure 934: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

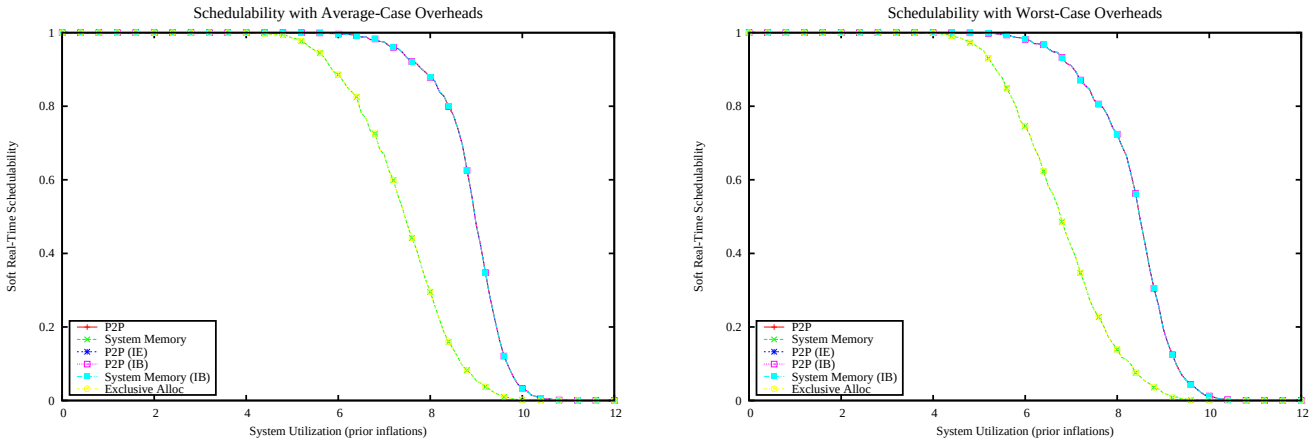

Figure 935: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

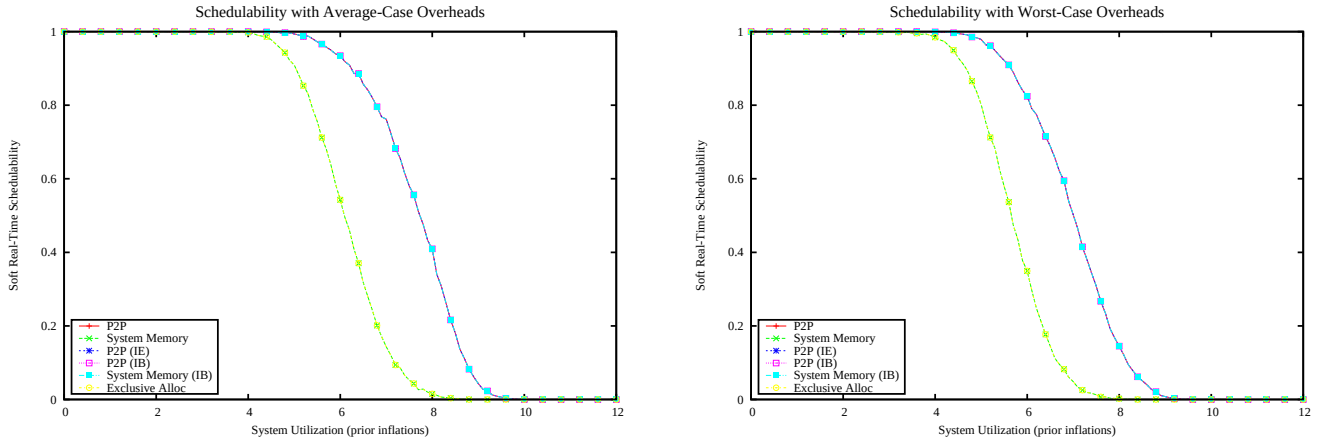

Figure 936: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

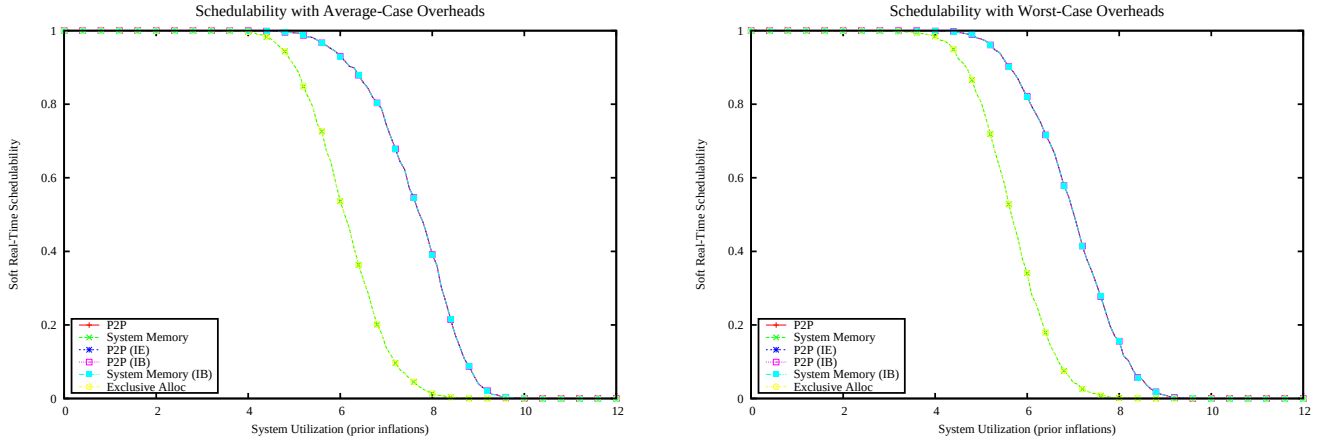

Figure 937: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

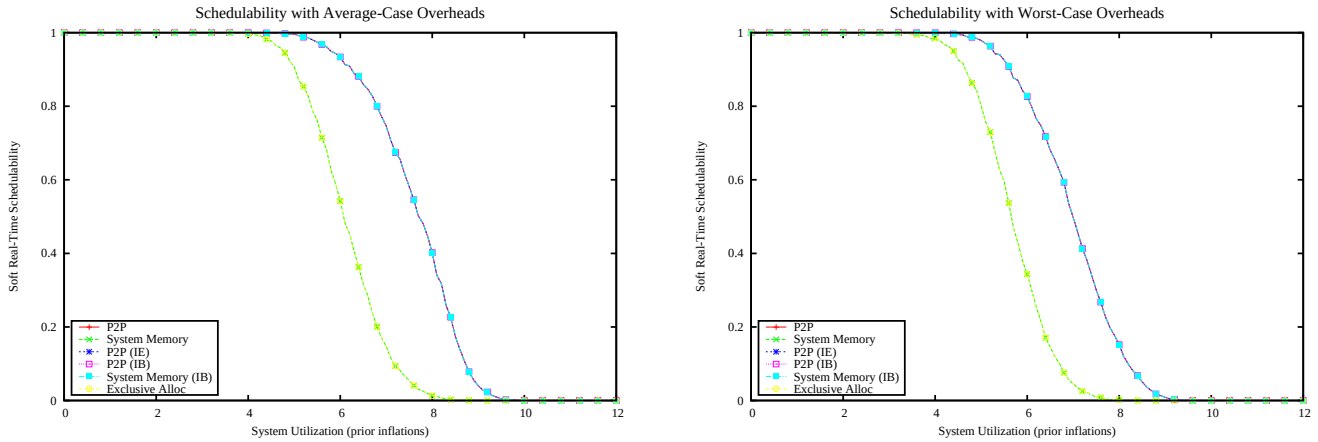

Figure 938: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

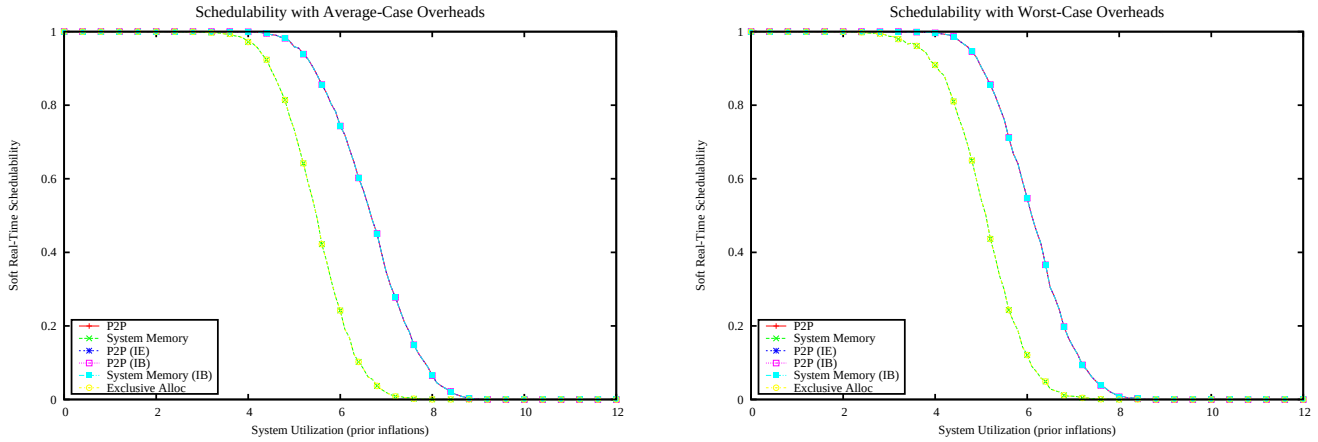

Figure 939: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

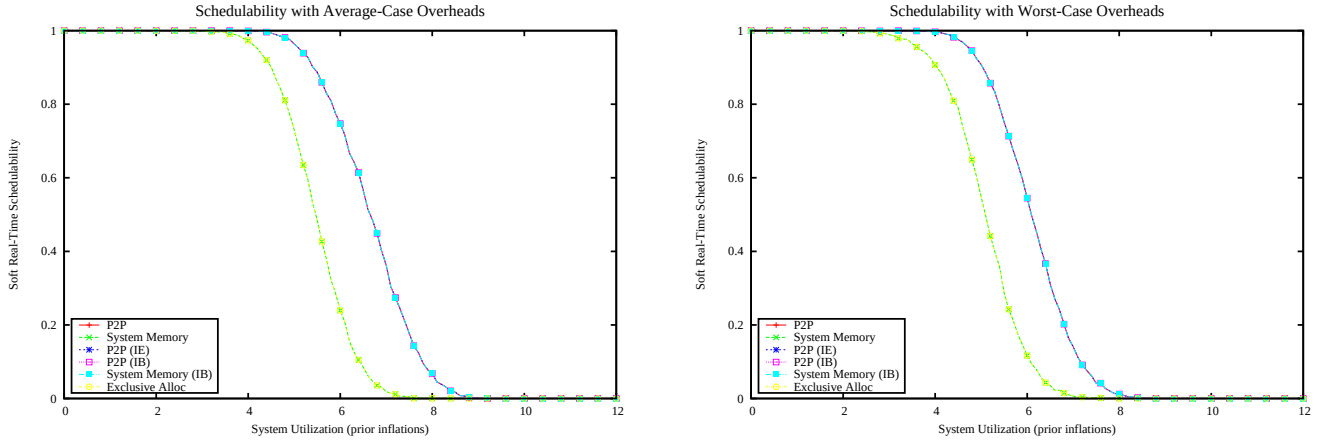

Figure 940: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

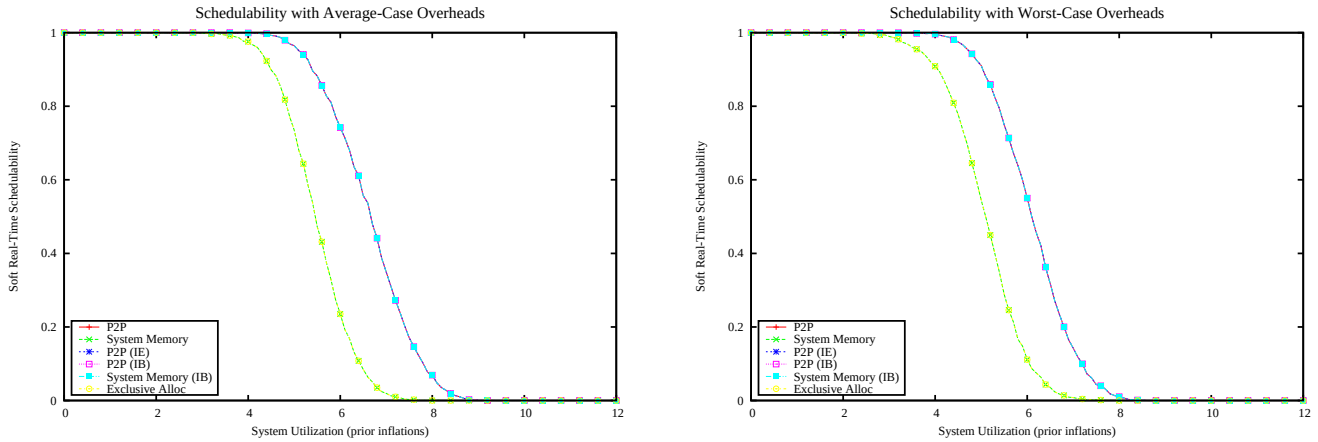

Figure 941: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

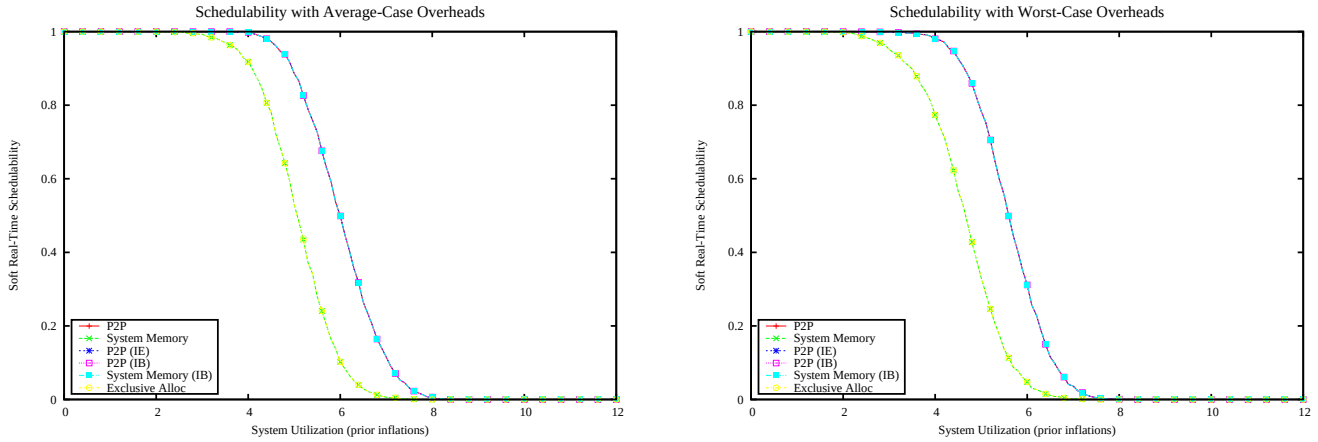

Figure 942: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

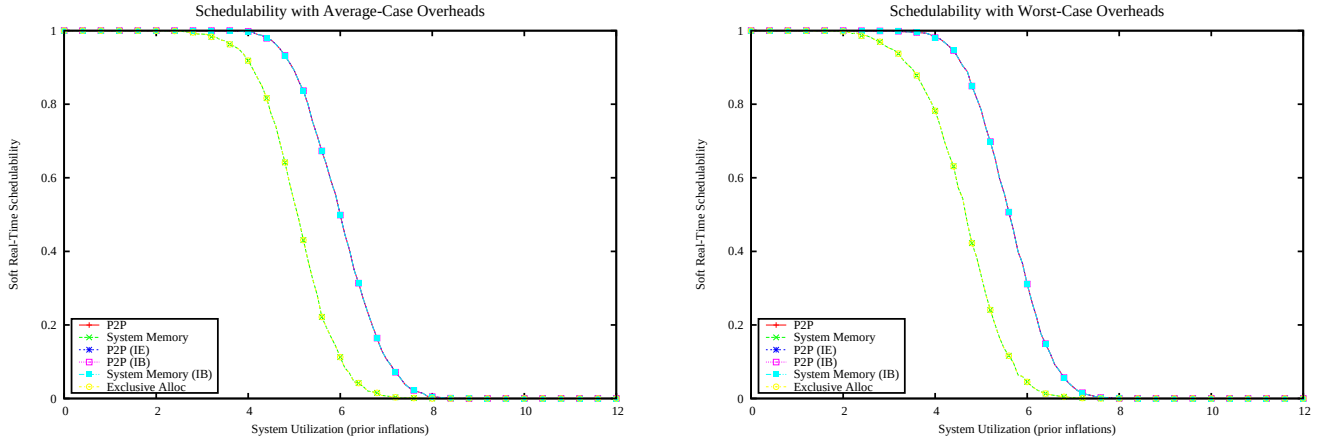

Figure 943: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

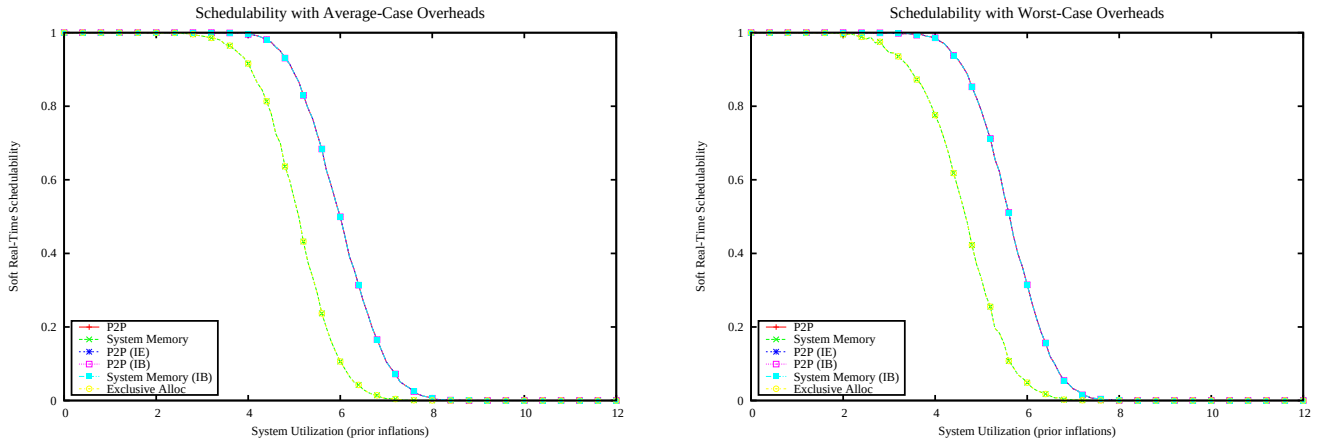

Figure 944: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

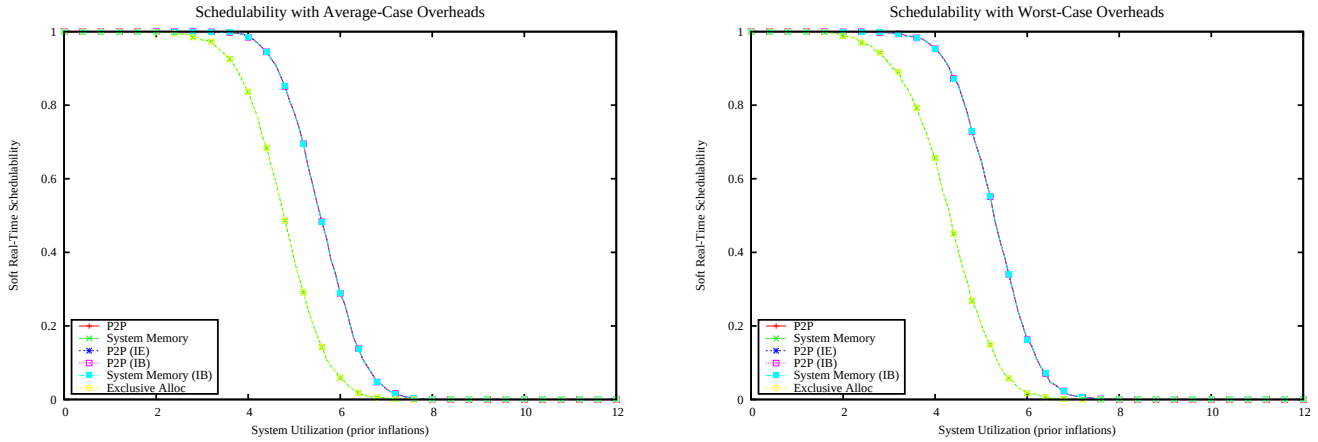

Figure 945: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

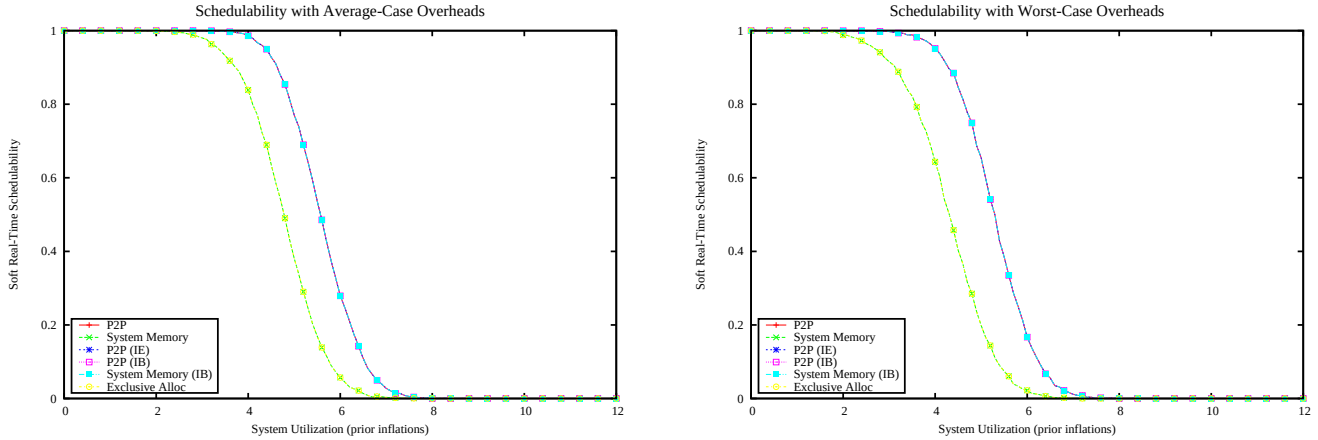

Figure 946: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

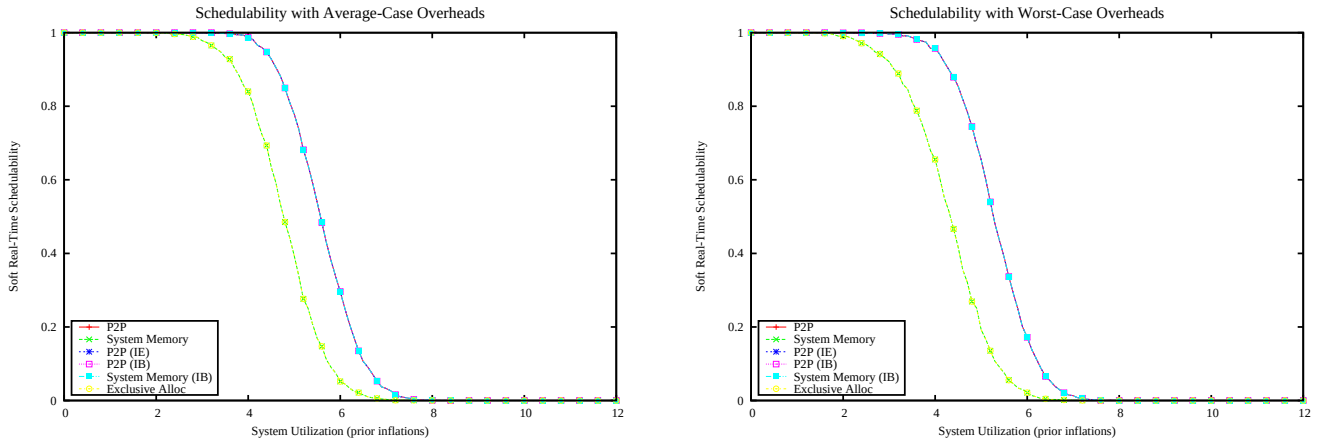

Figure 947: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

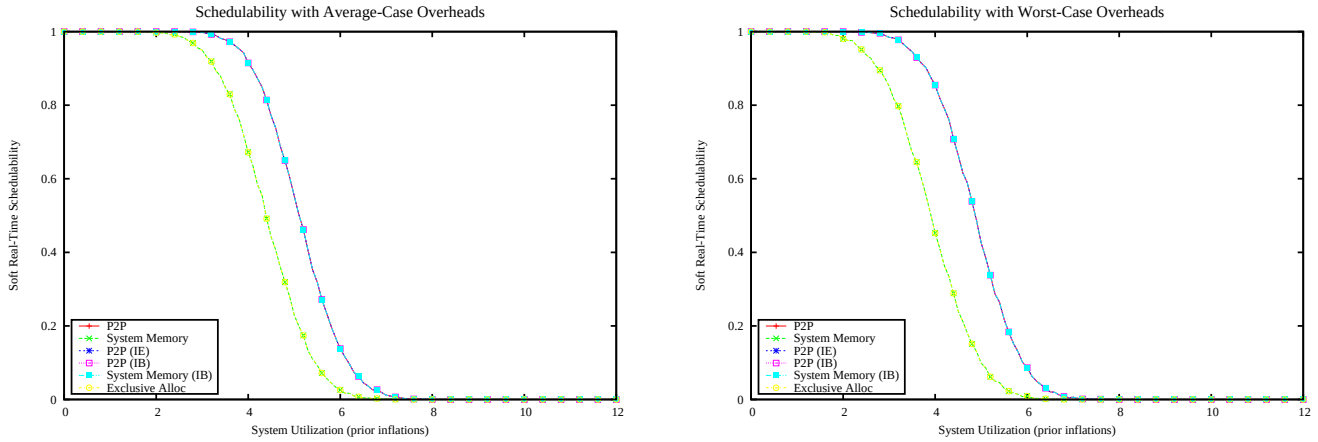

Figure 948: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

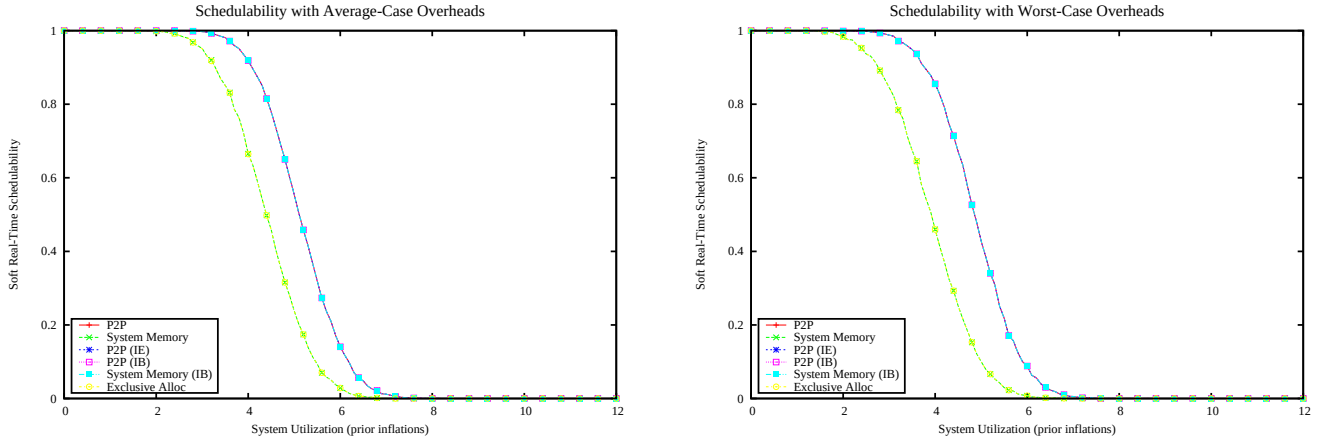

Figure 949: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

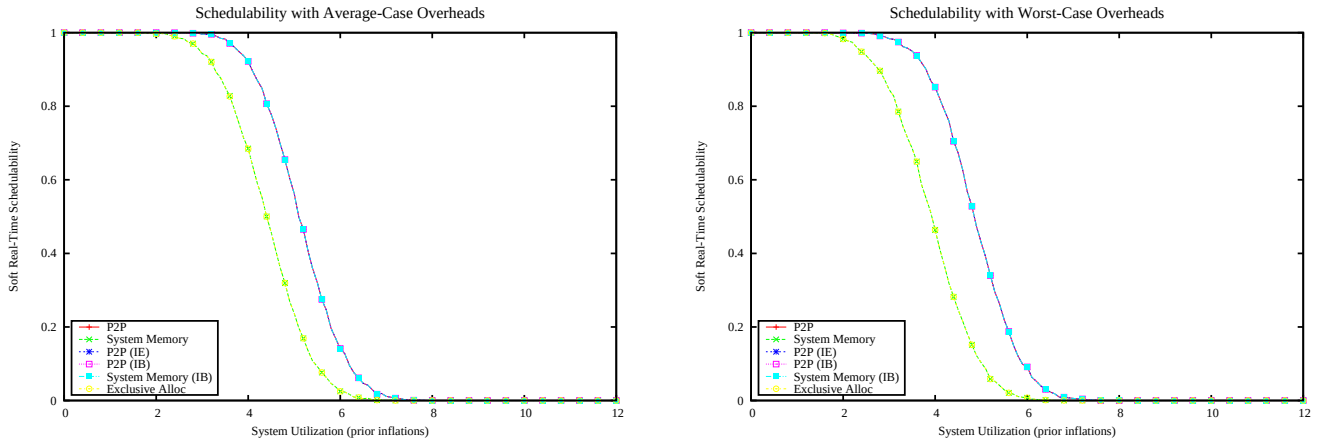

Figure 950: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

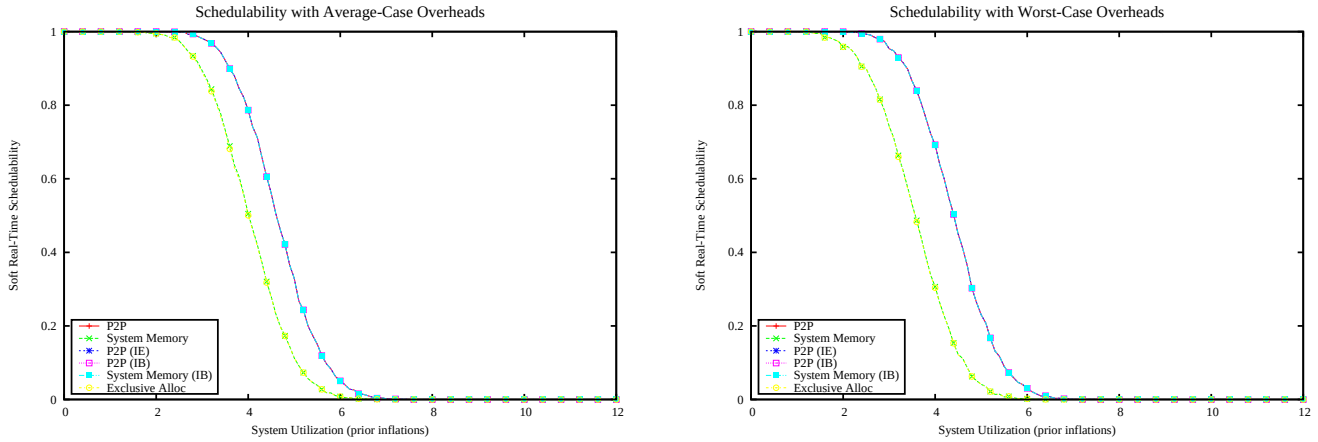

Figure 951: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

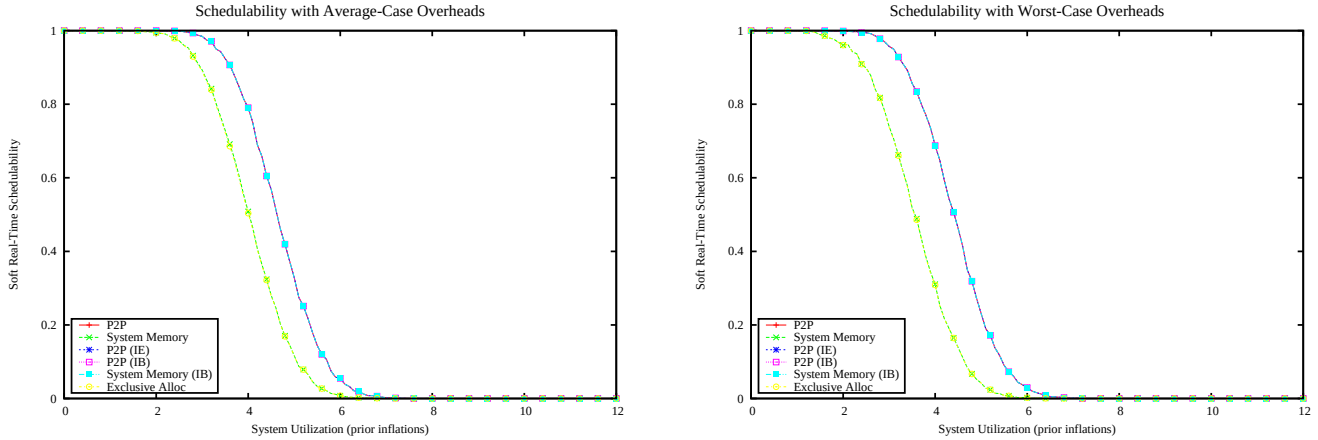

Figure 952: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

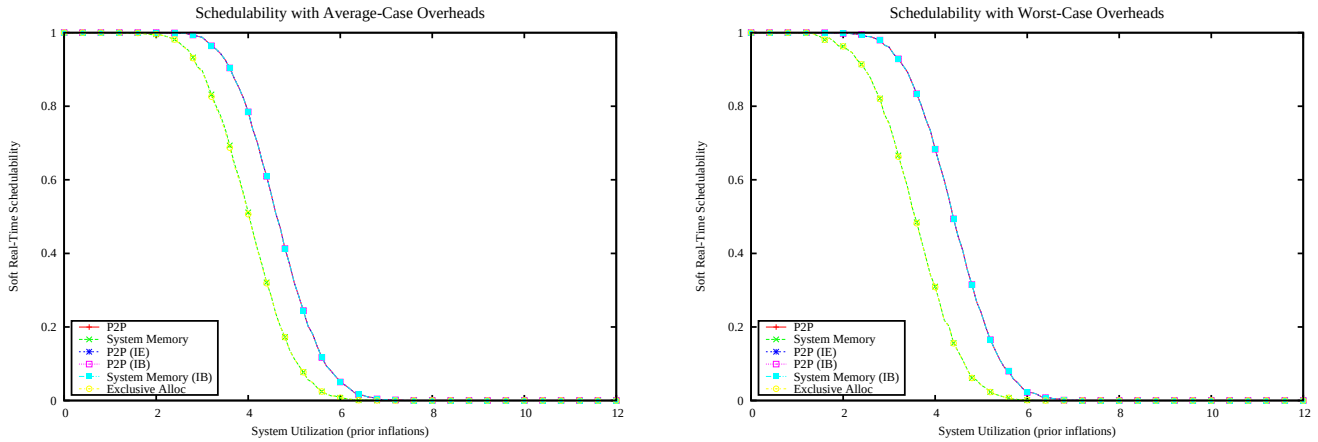

Figure 953: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

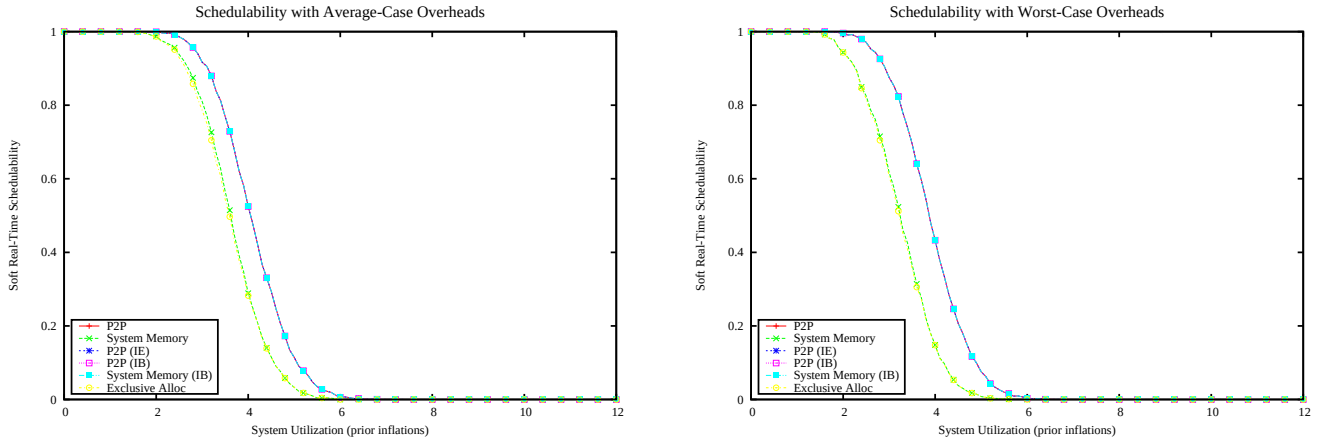

Figure 954: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

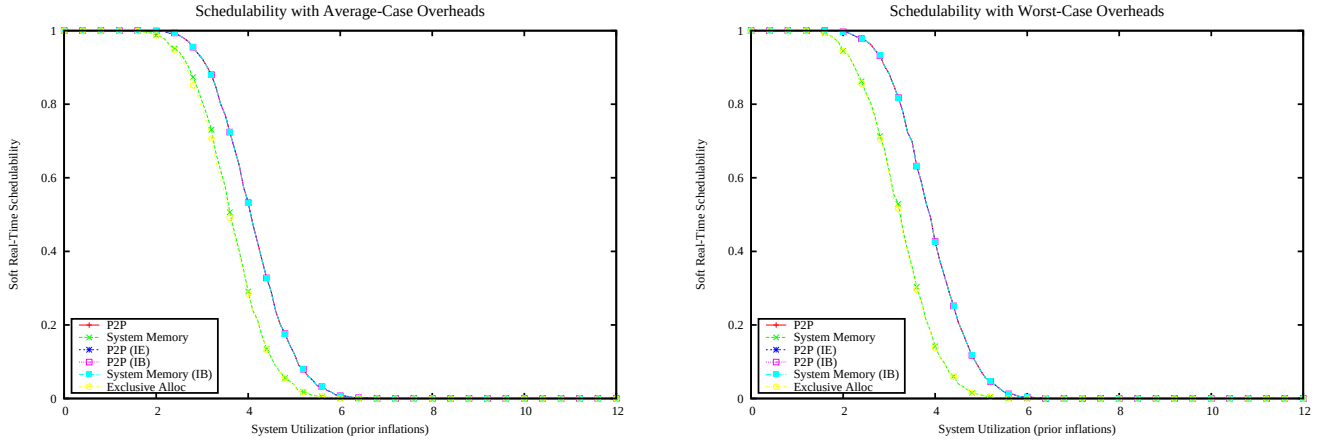

Figure 955: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

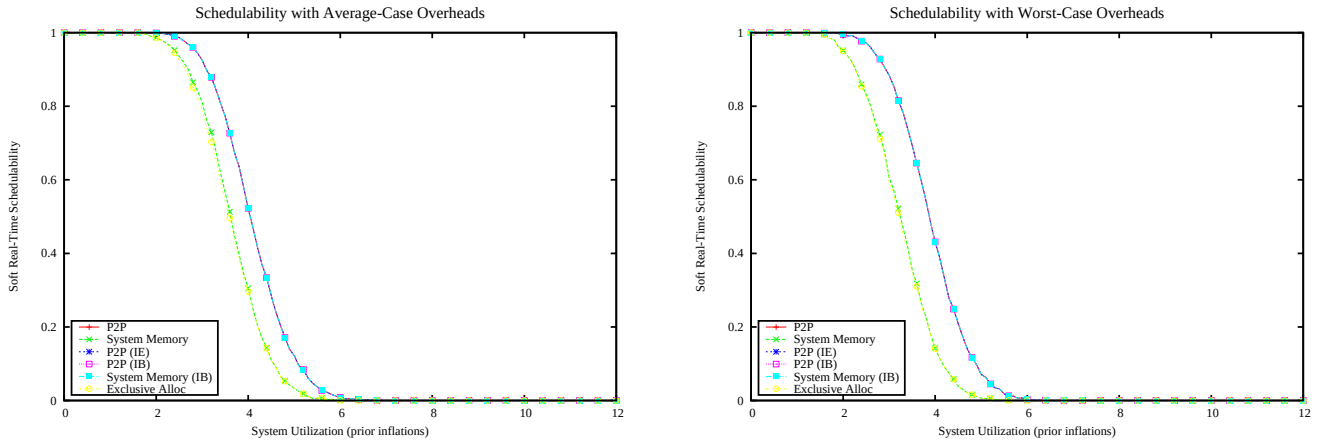

Figure 956: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

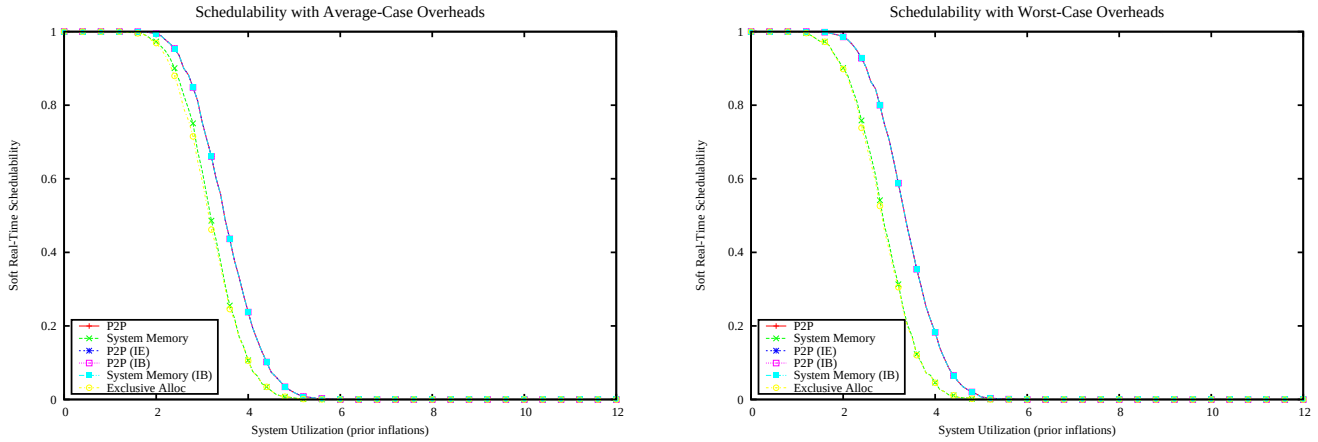

Figure 957: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

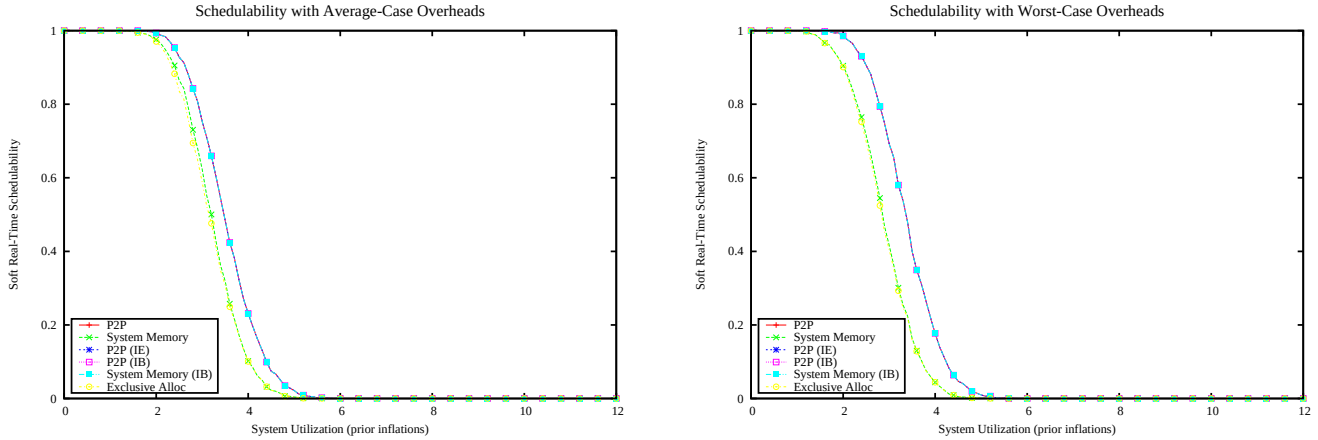

Figure 958: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

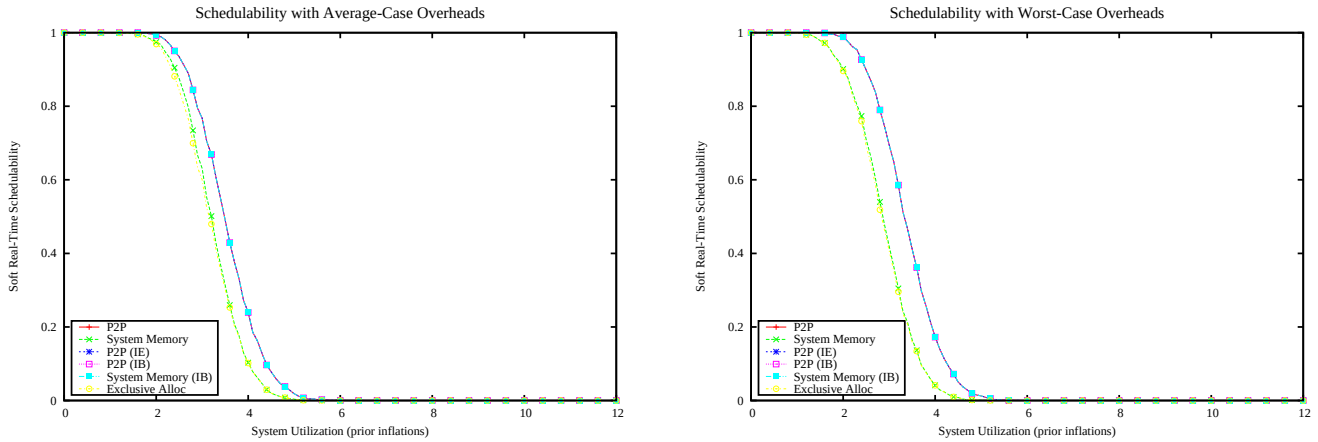

Figure 959: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

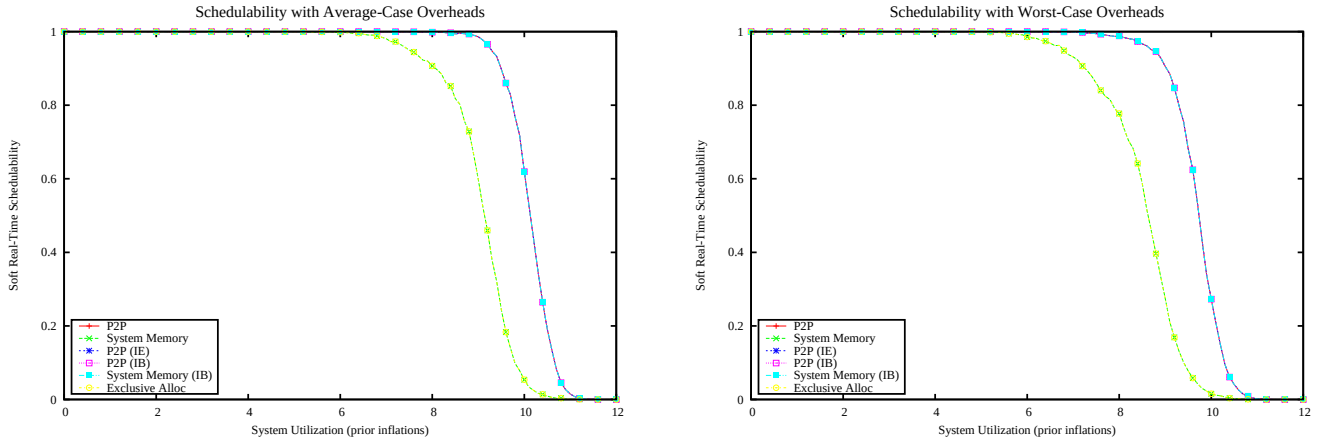

Figure 960: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

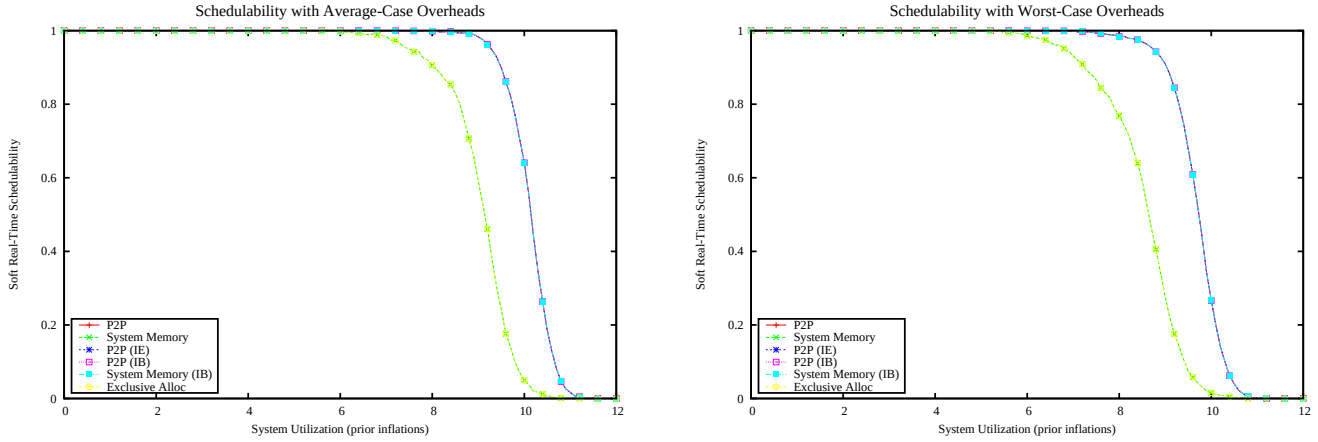

Figure 961: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

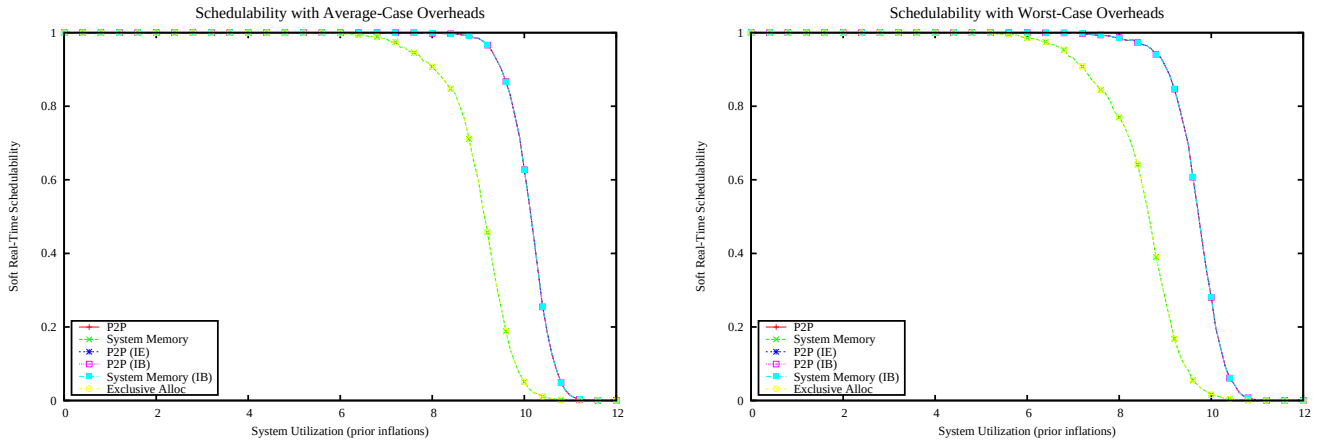

Figure 962: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

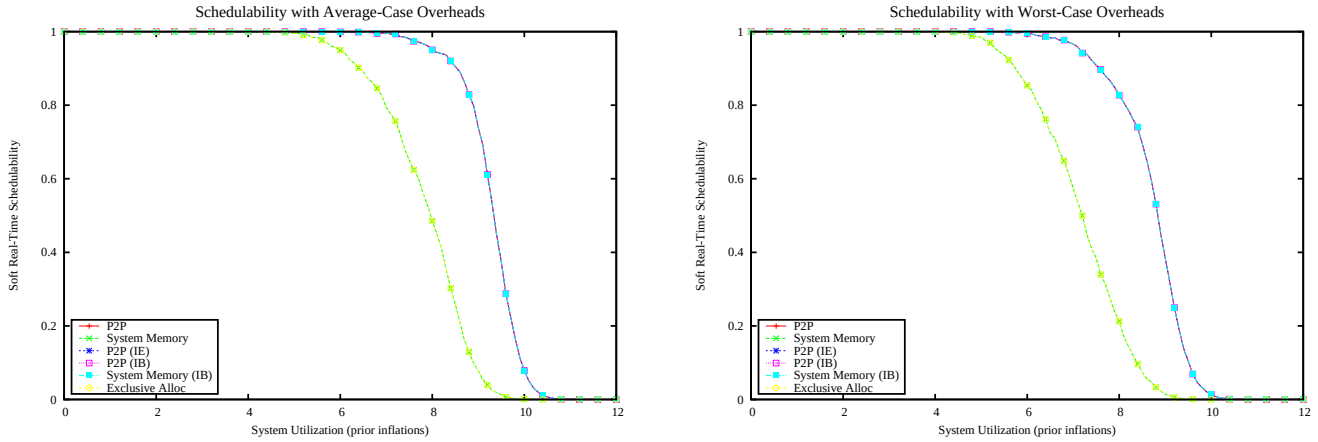

Figure 963: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

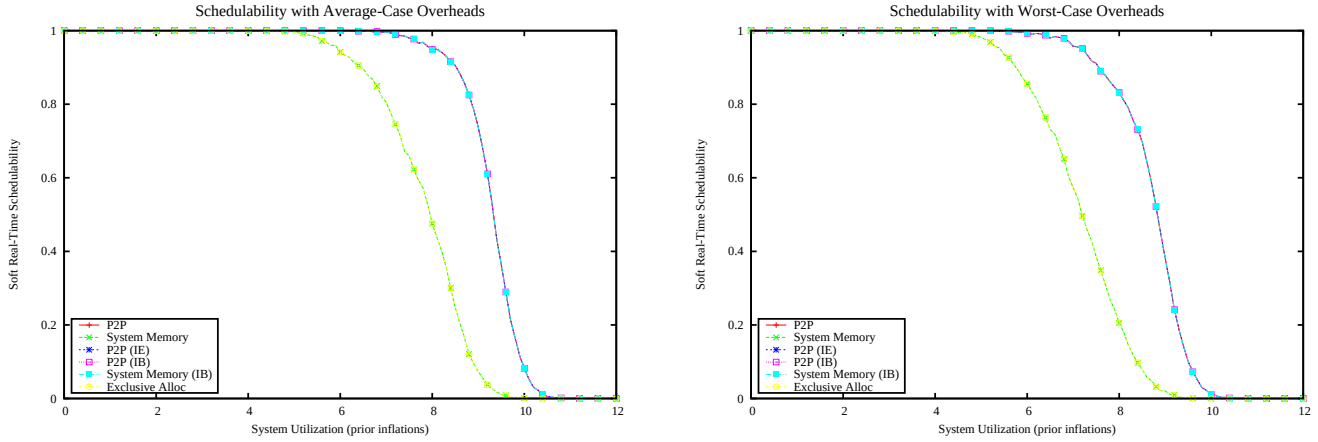

Figure 964: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

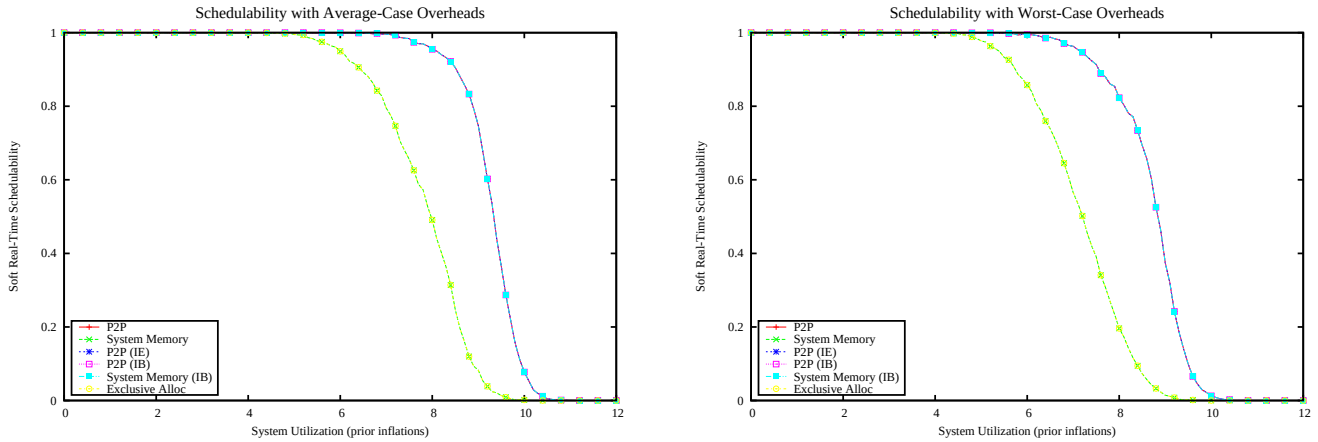

Figure 965: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

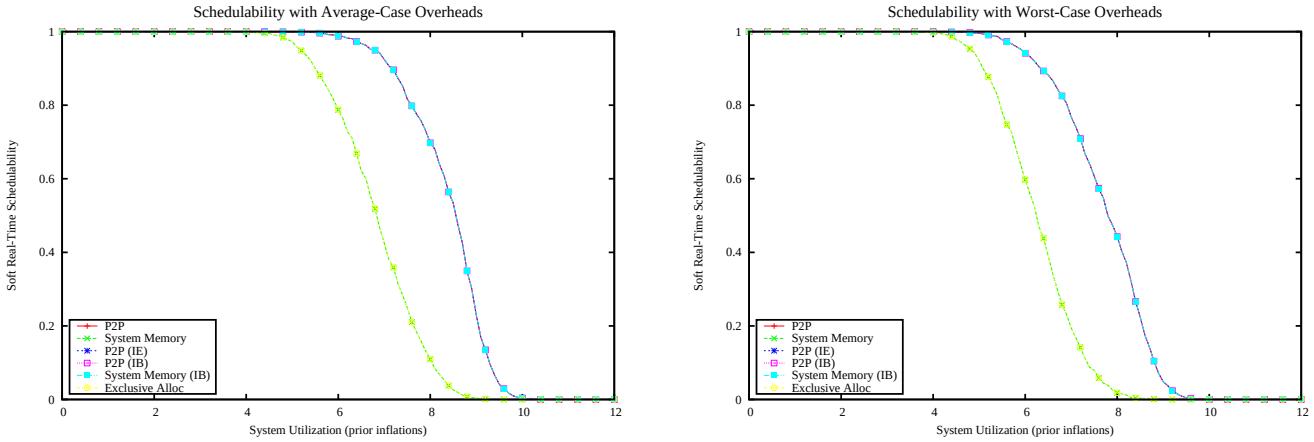

Figure 966: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

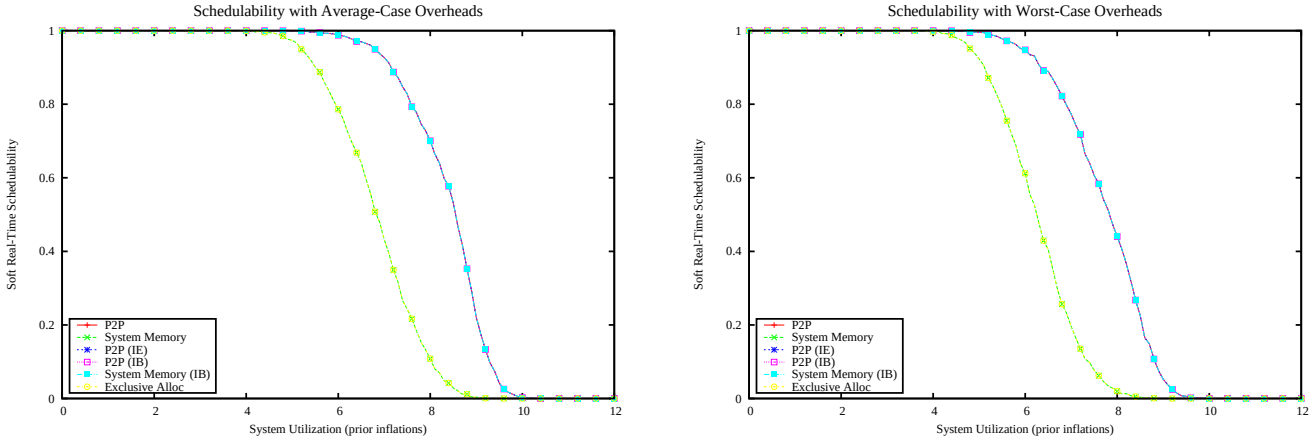

Figure 967: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

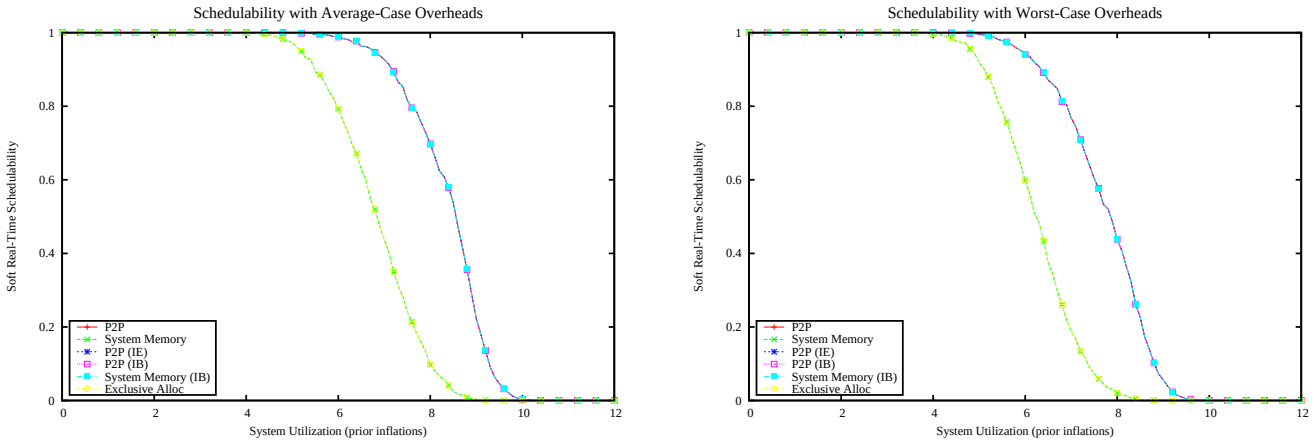

Figure 968: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

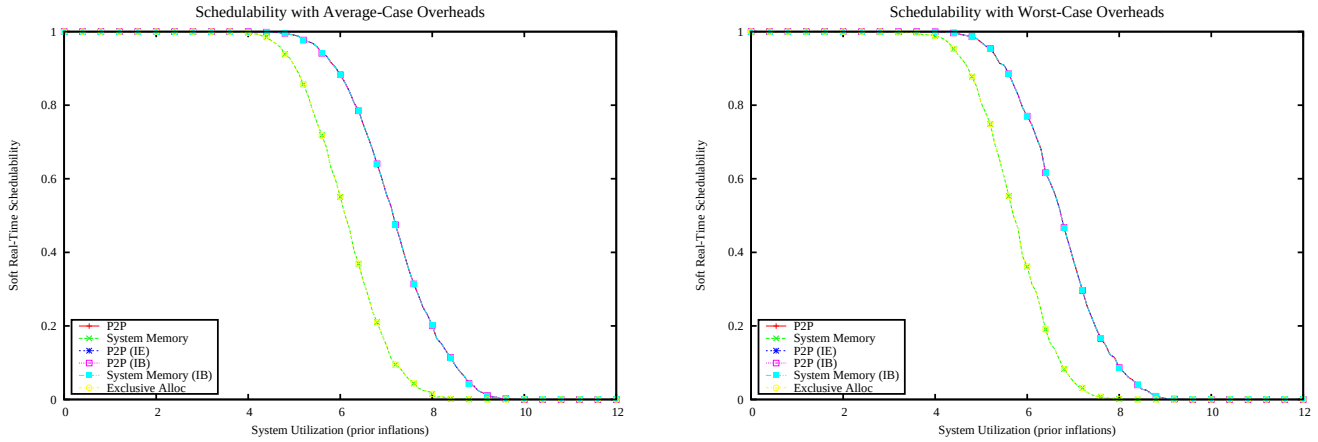

Figure 969: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

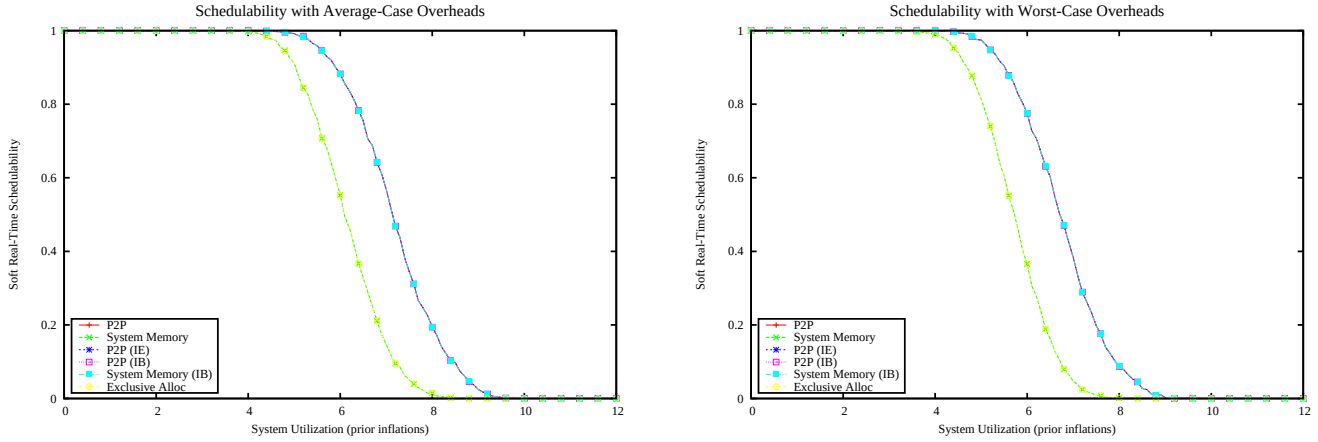

Figure 970: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

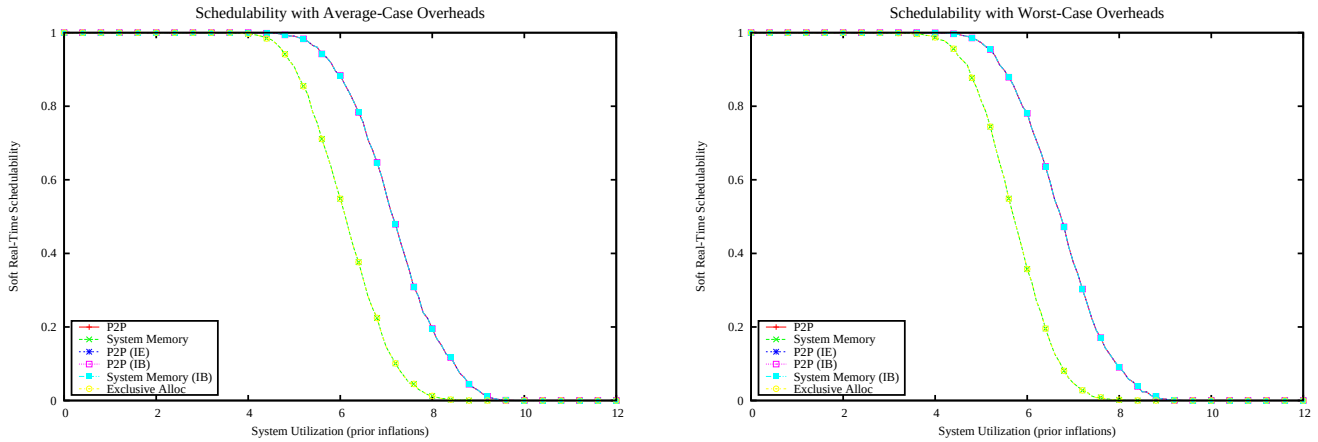

Figure 971: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

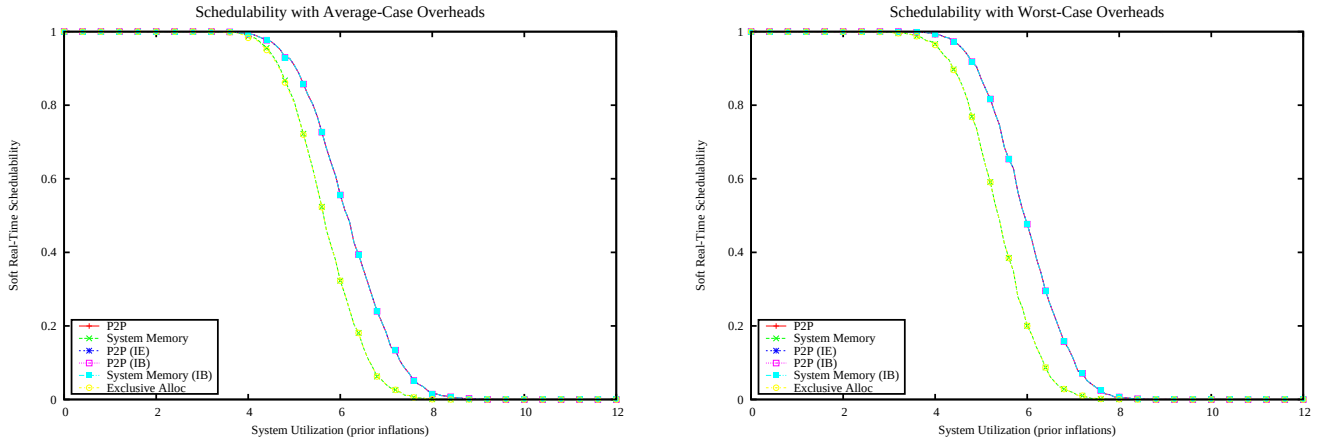

Figure 972: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

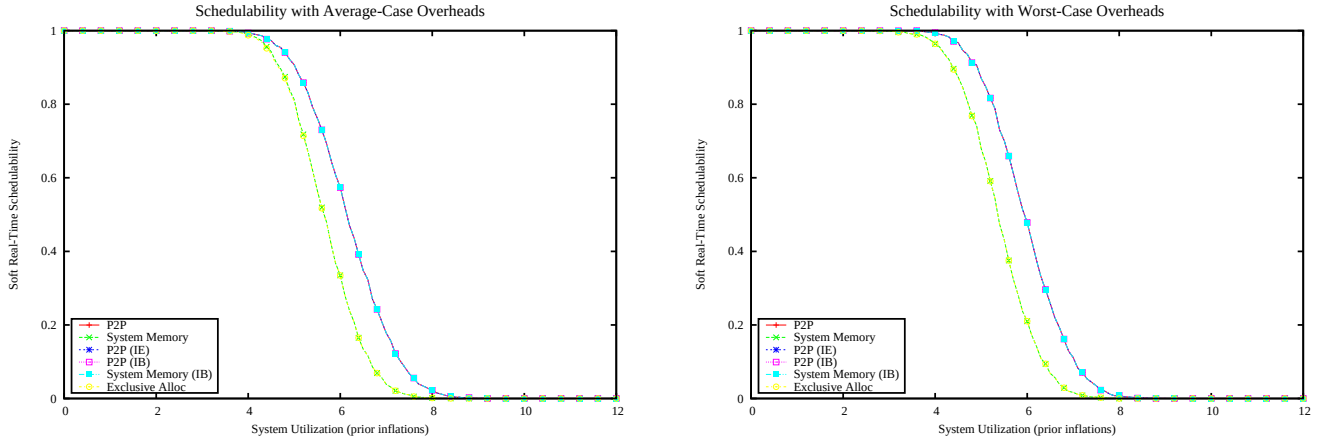

Figure 973: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

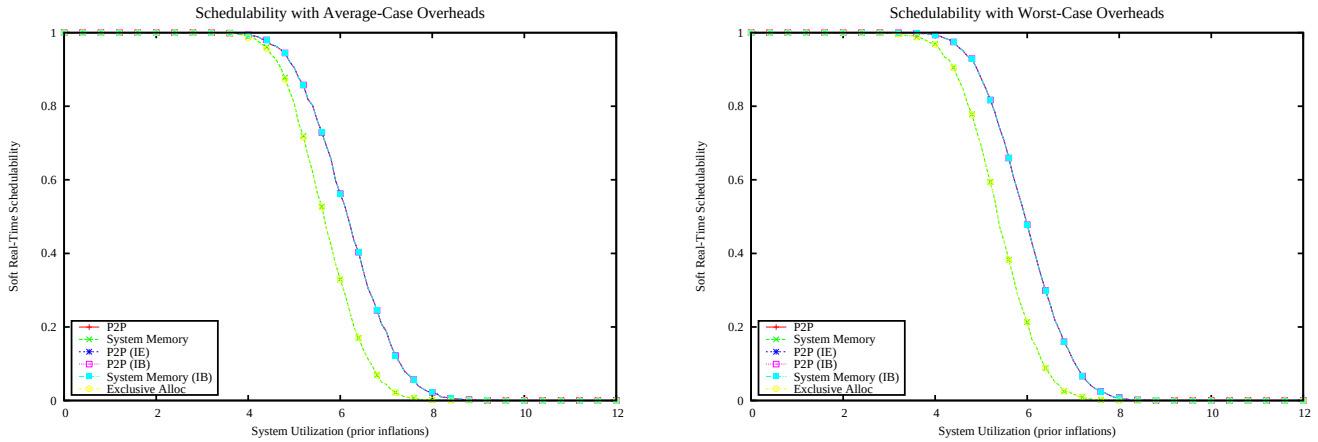

Figure 974: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

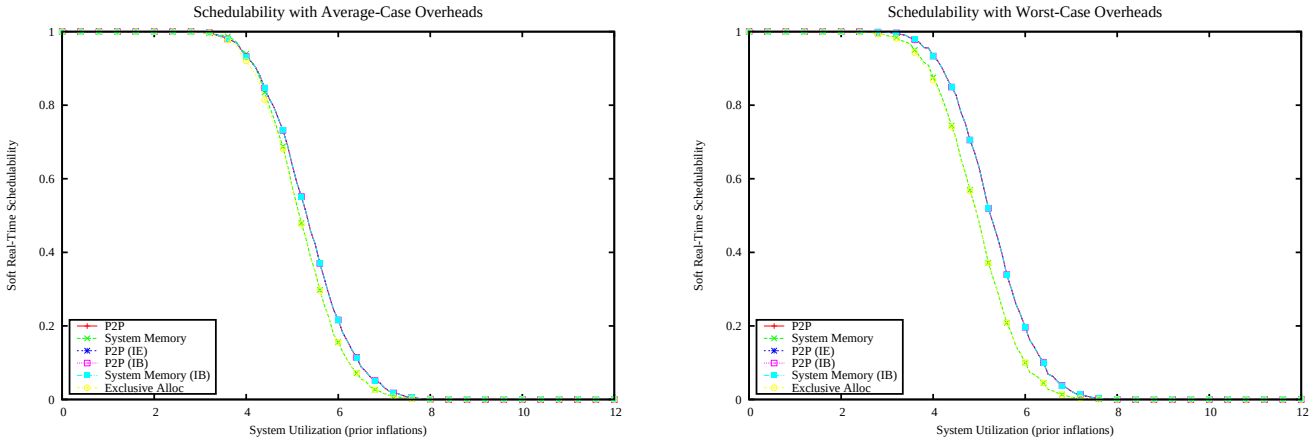

Figure 975: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

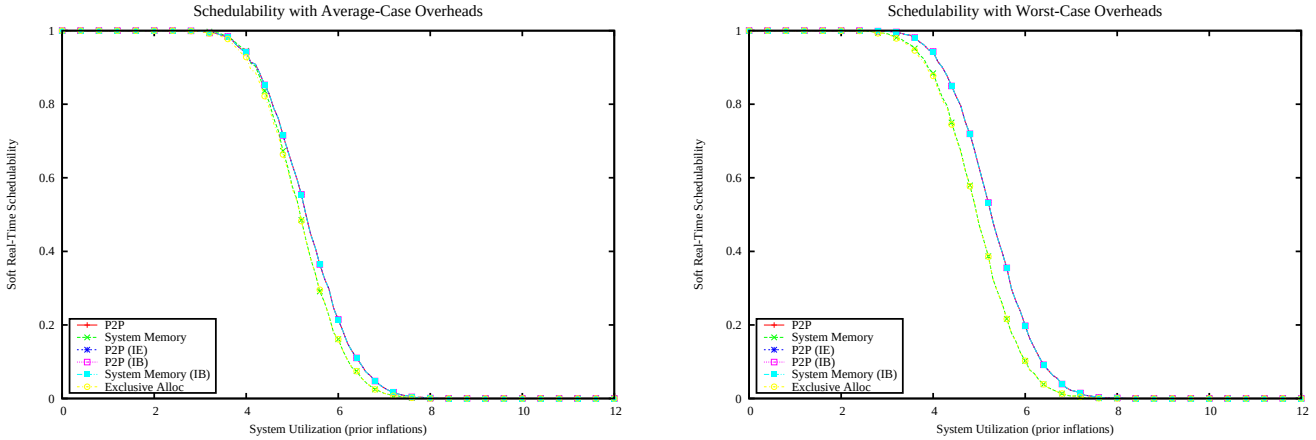

Figure 976: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

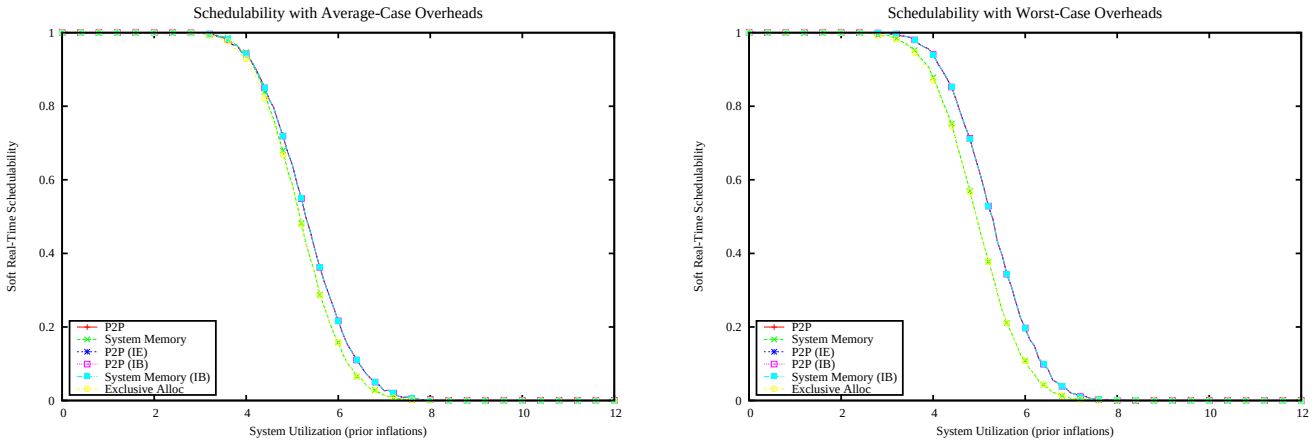

Figure 977: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

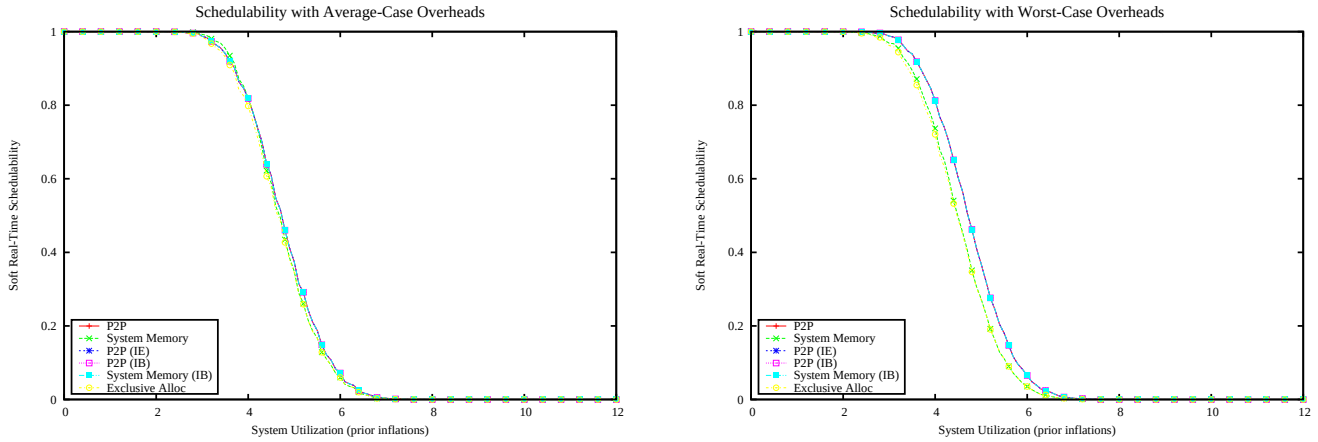

Figure 978: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

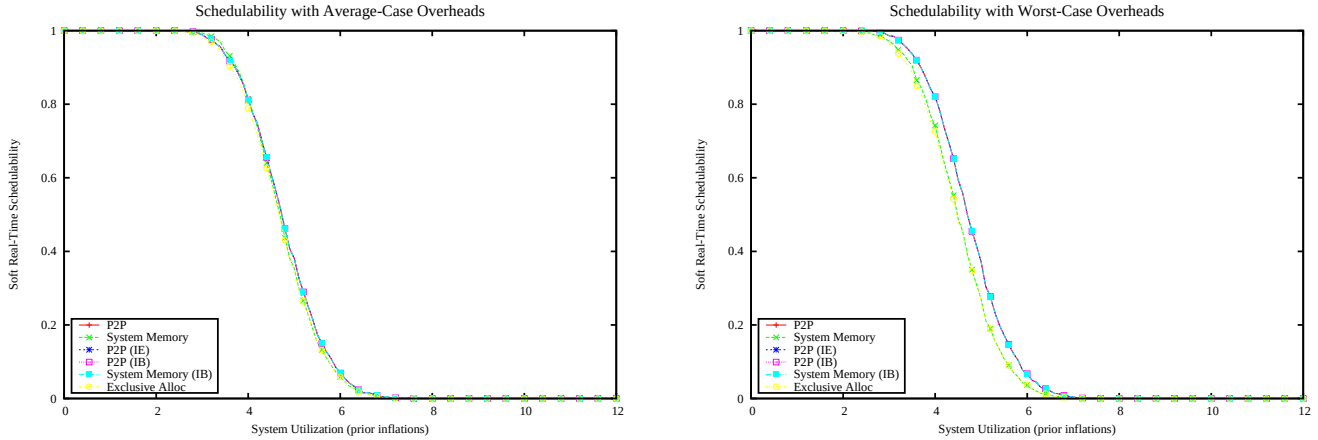

Figure 979: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

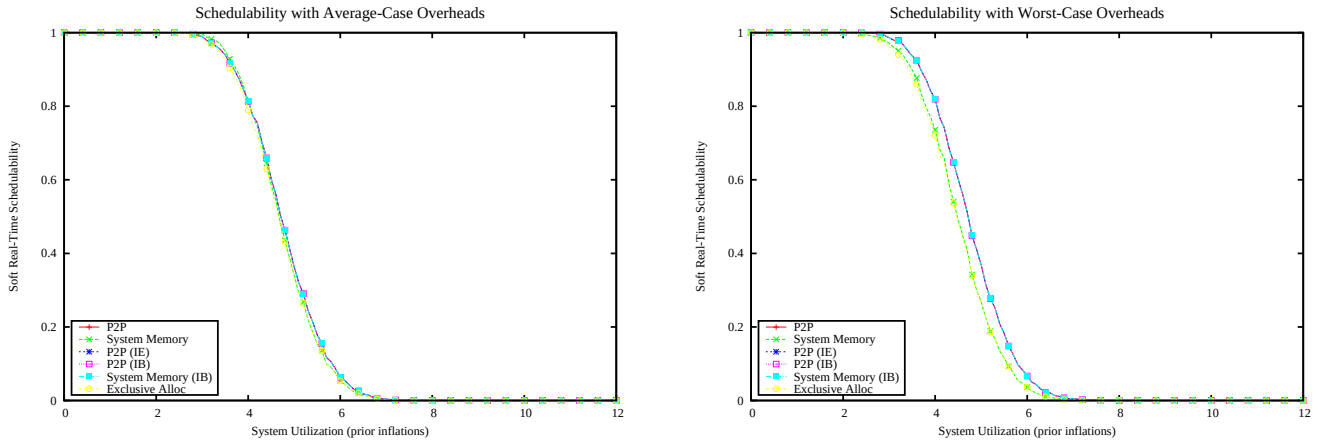

Figure 980: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

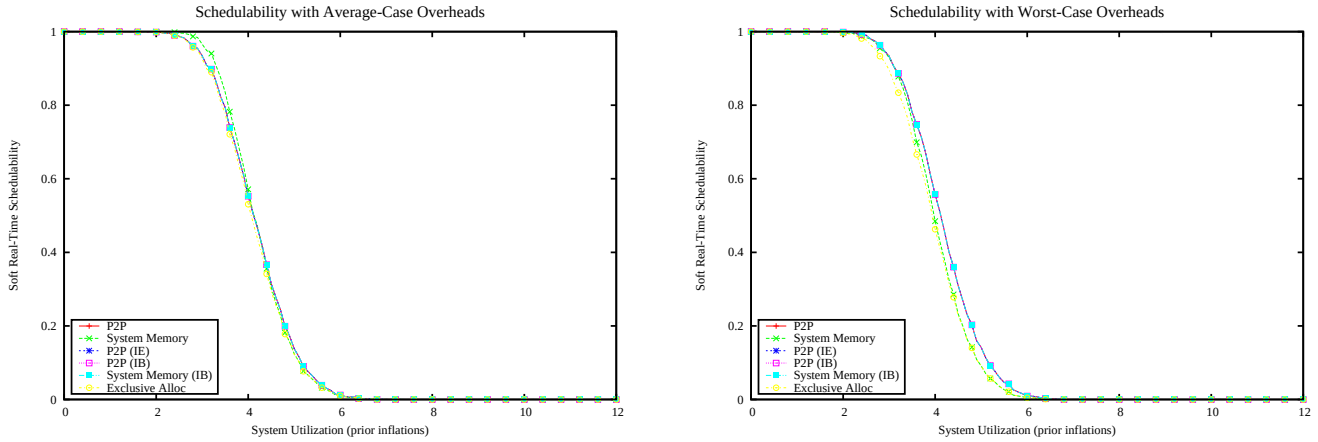

Figure 981: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

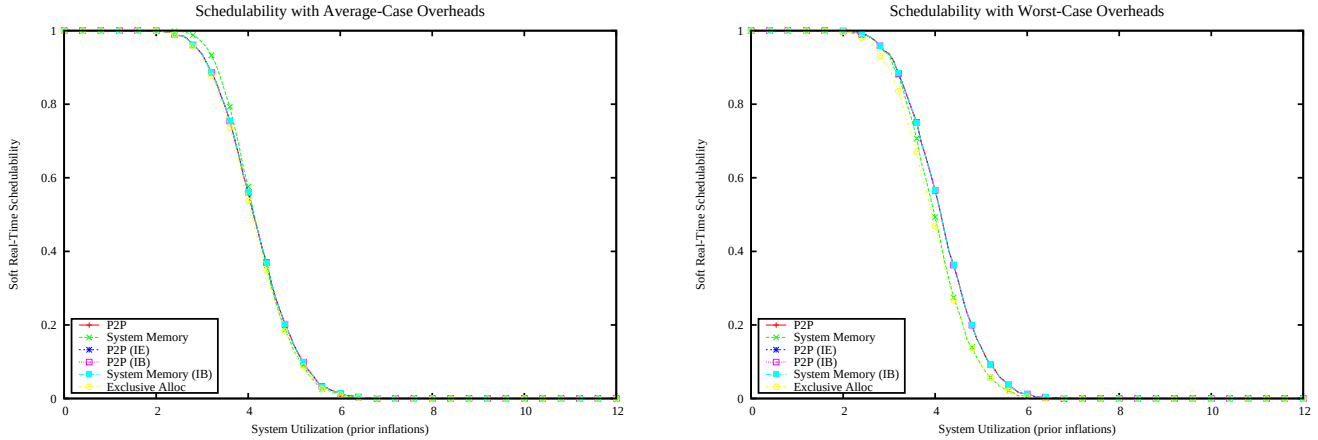

Figure 982: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

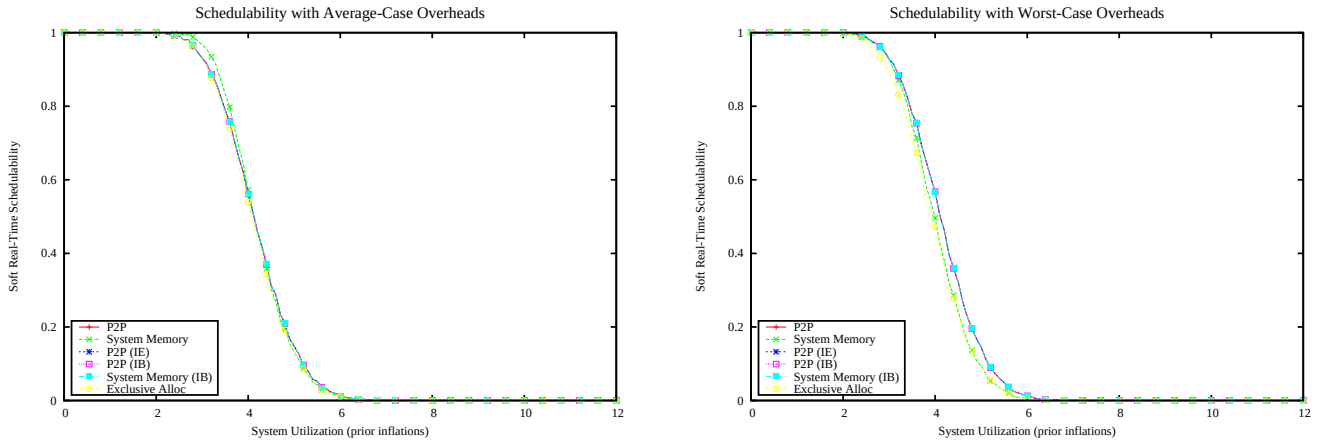

Figure 983: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

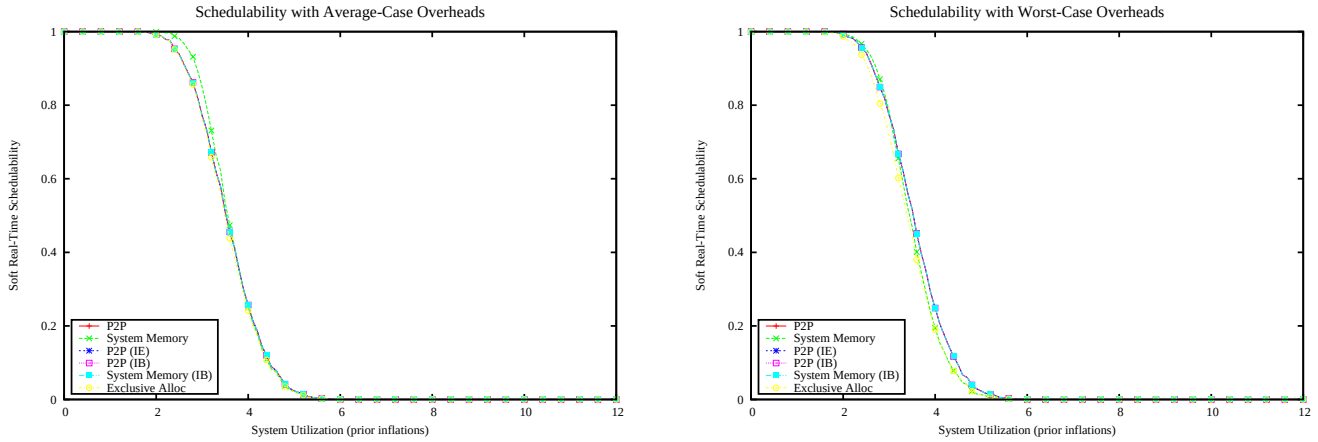

Figure 984: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

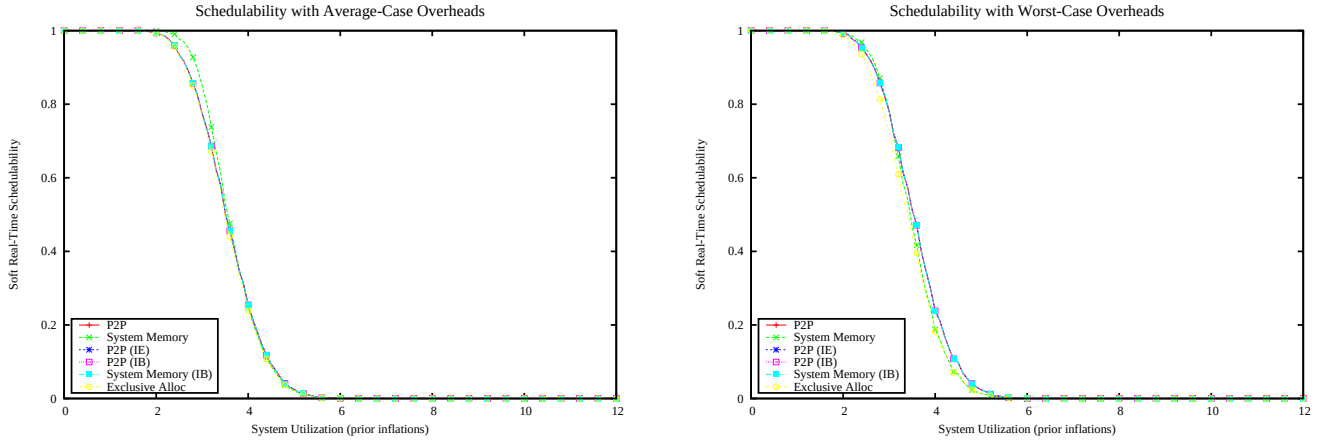

Figure 985: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

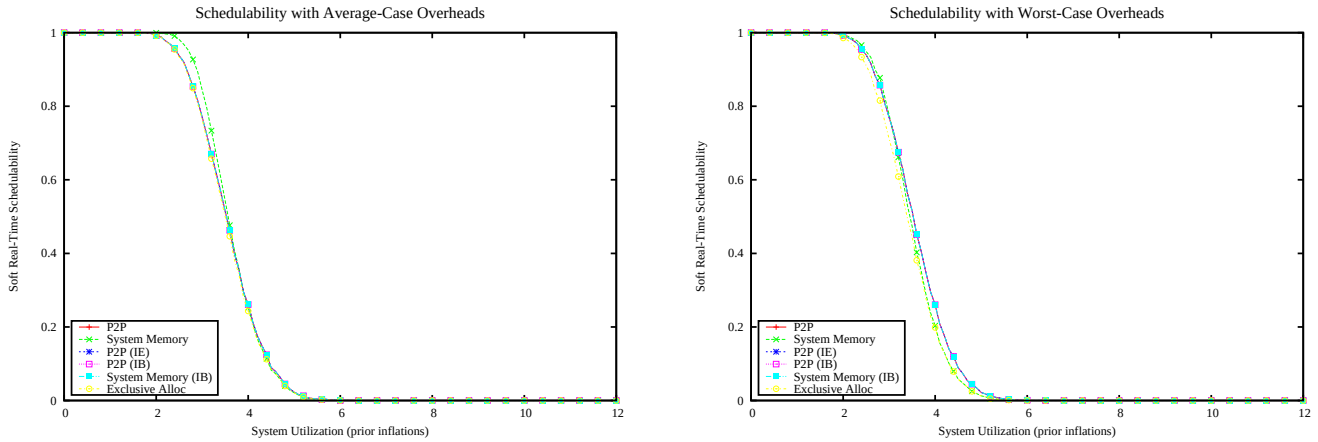

Figure 986: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

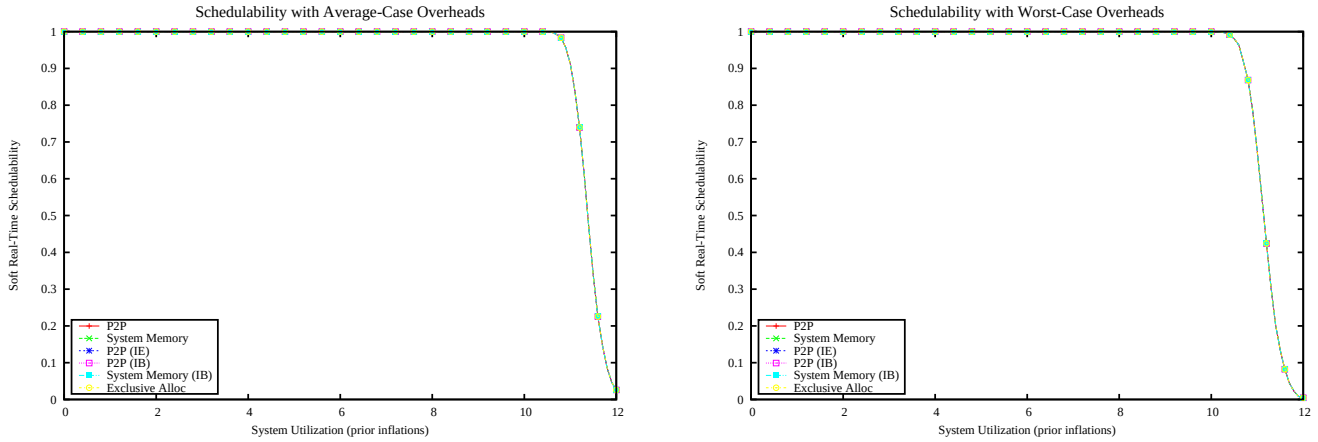

Figure 987: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

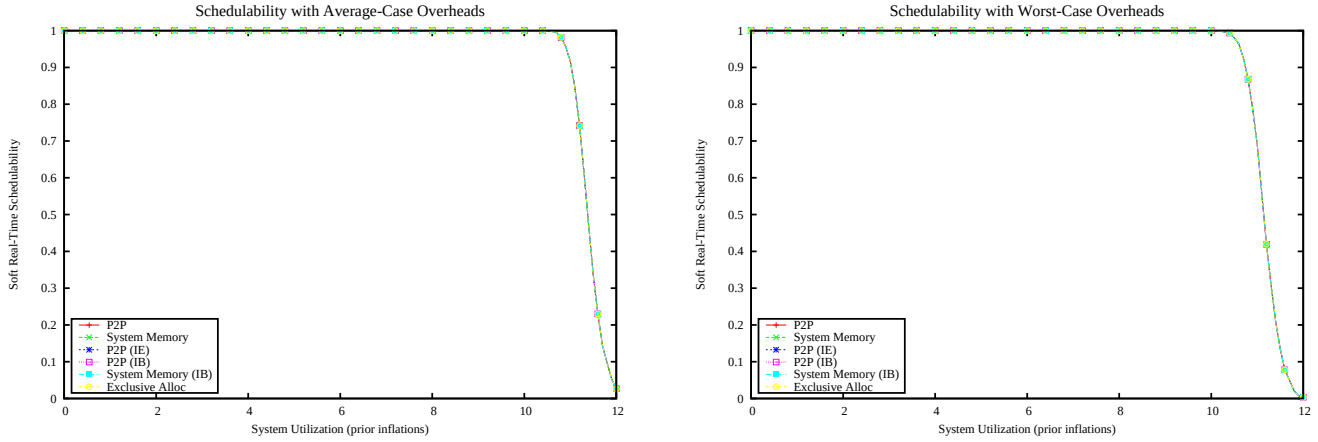

Figure 988: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

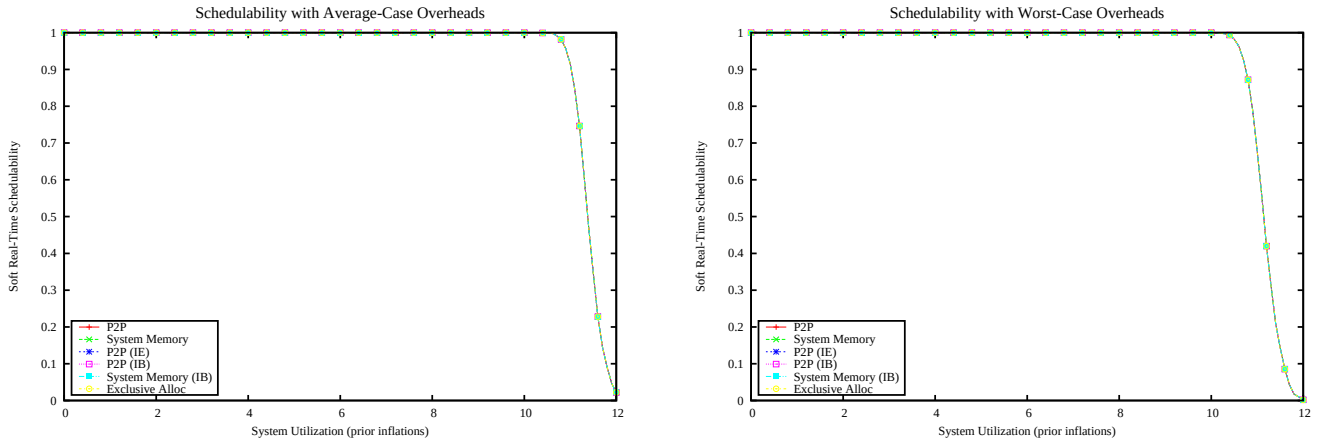

Figure 989: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

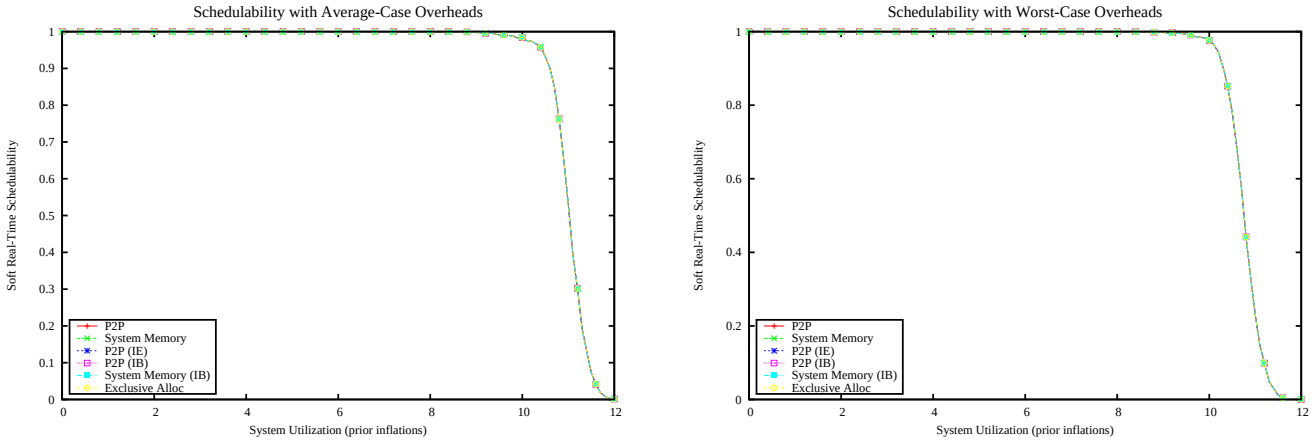

Figure 990: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

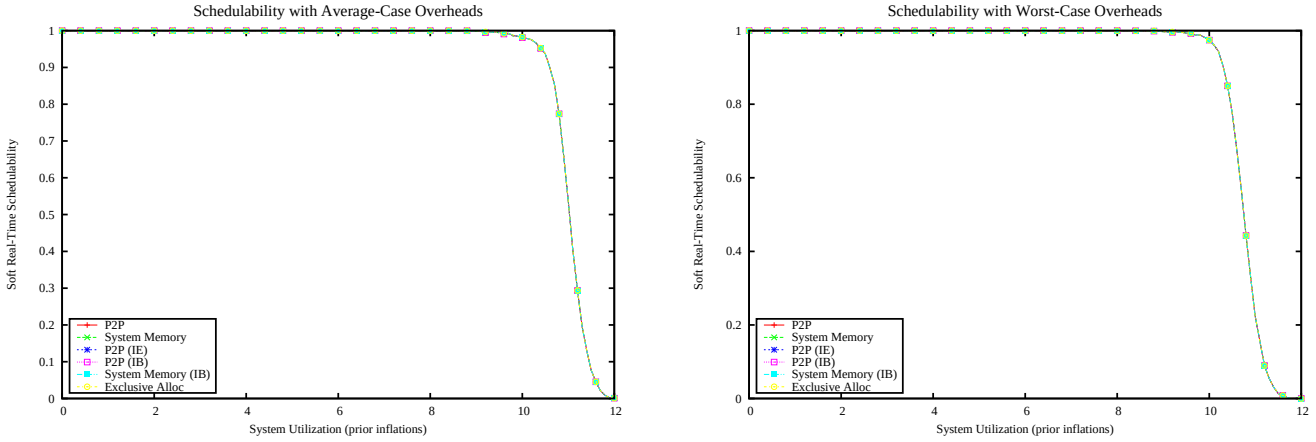

Figure 991: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

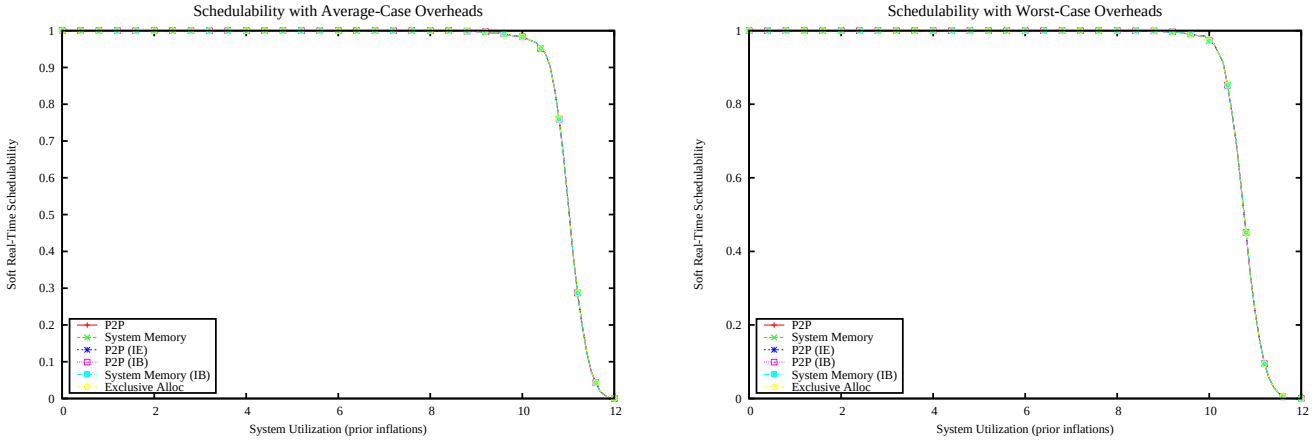

Figure 992: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

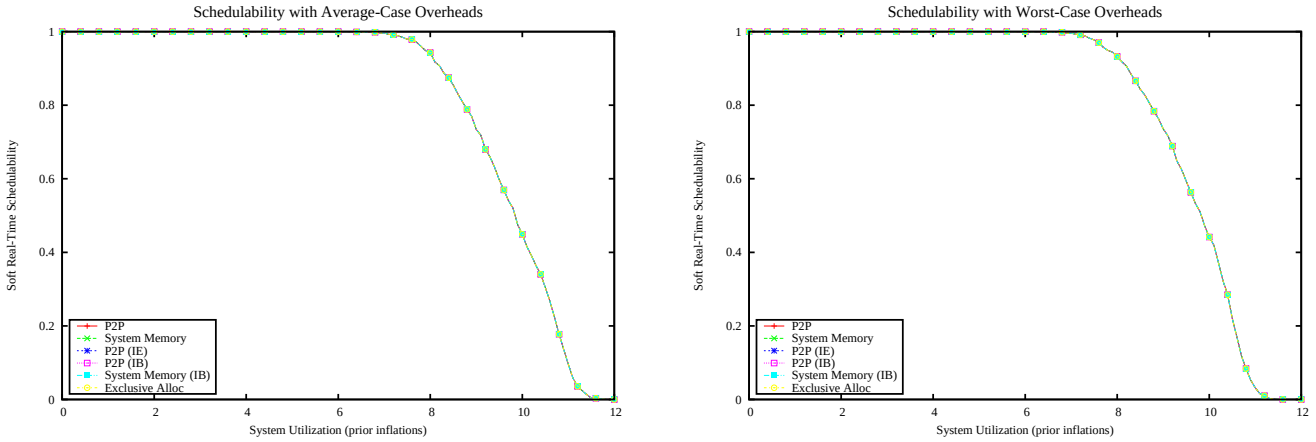

Figure 993: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

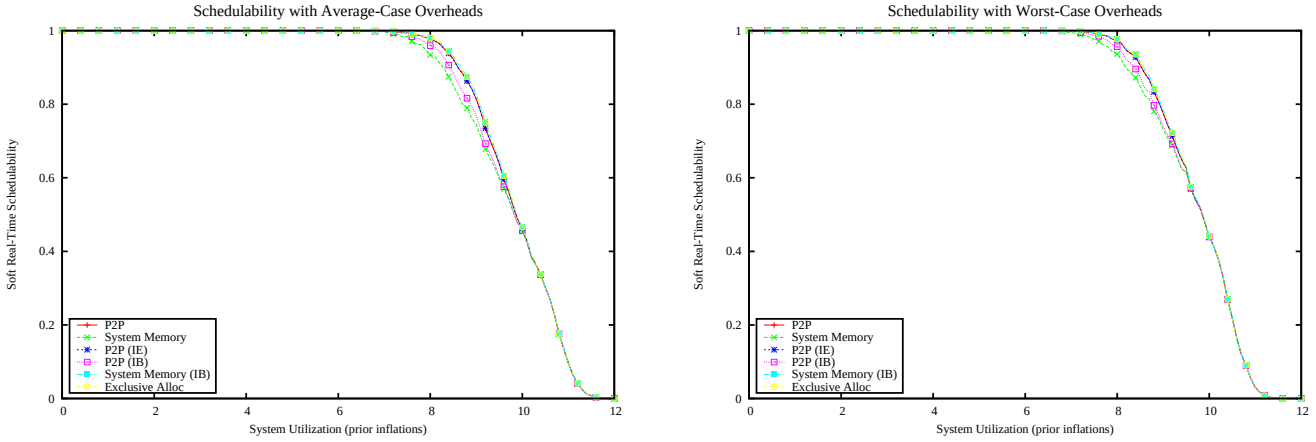

Figure 994: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

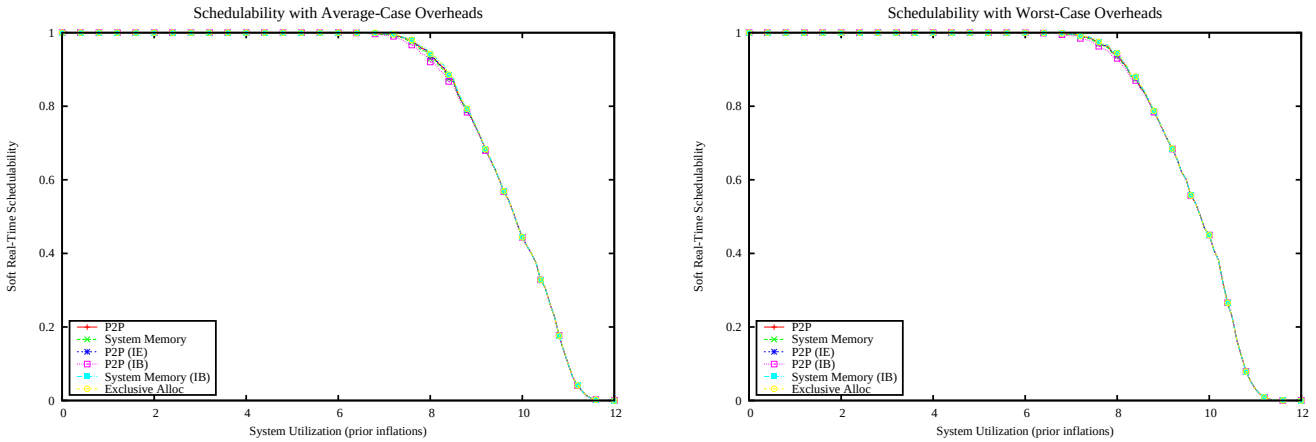

Figure 995: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

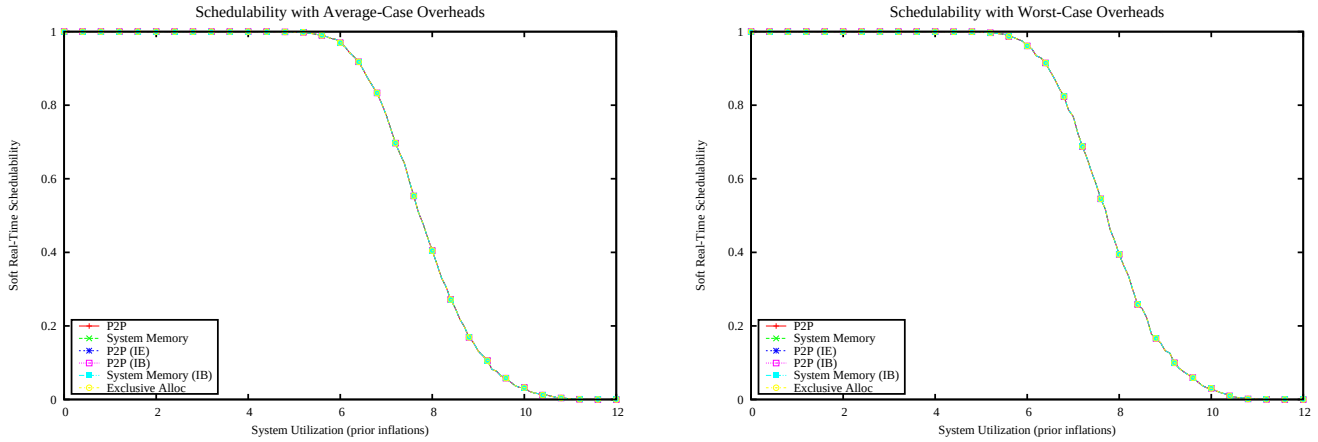

Figure 996: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 1$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

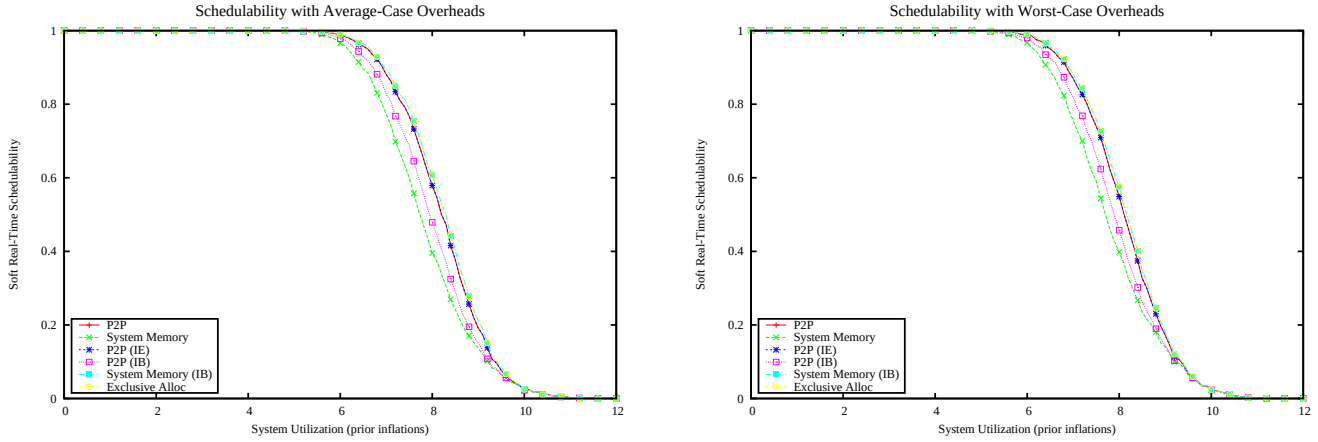

Figure 997: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 2$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

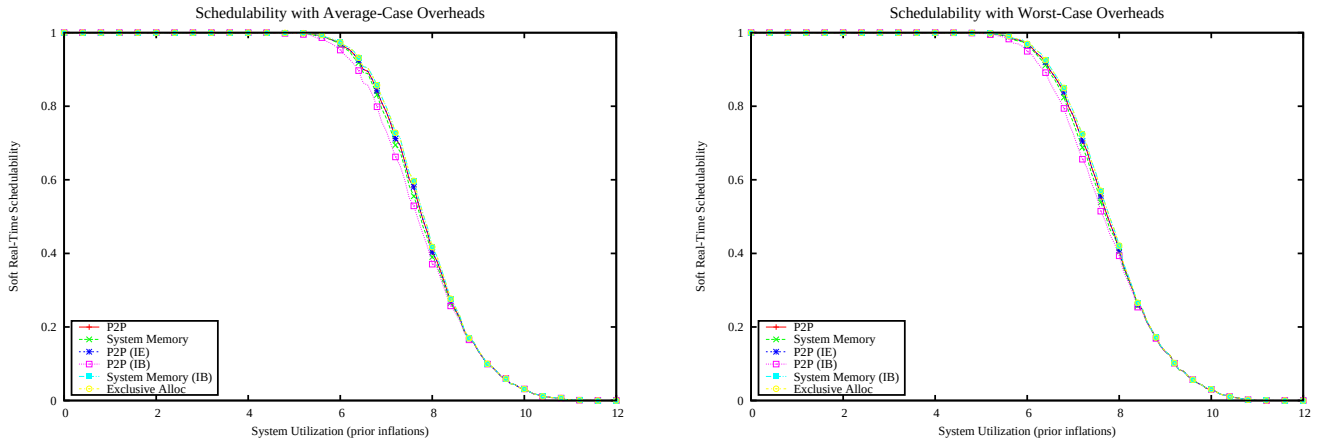

Figure 998: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), $\rho = 3$, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

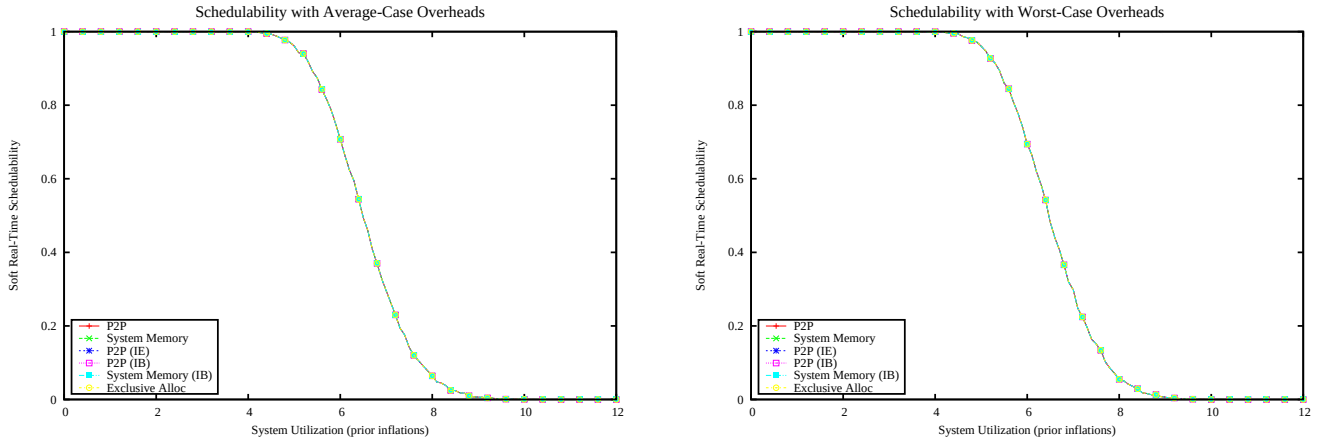

Figure 999: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

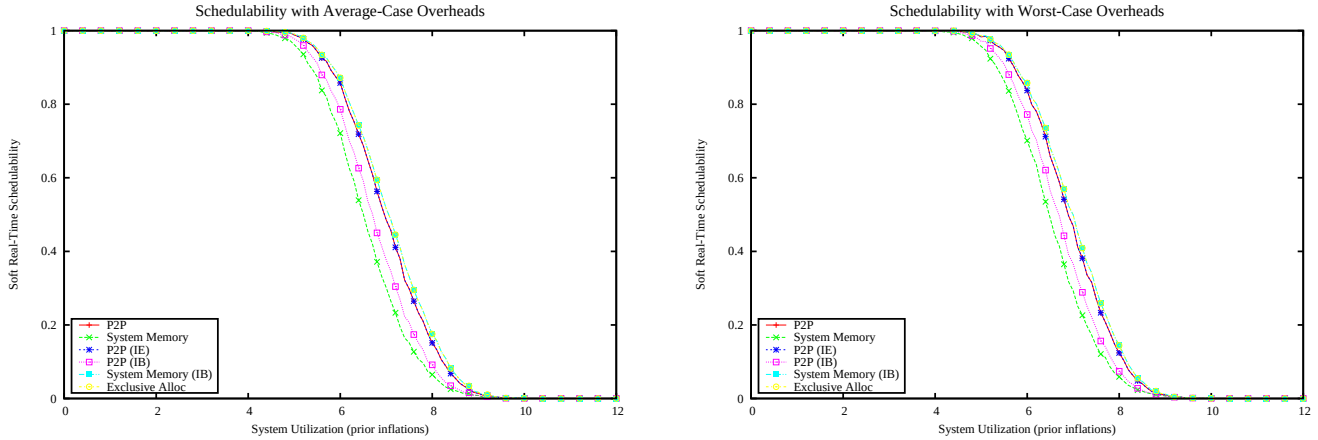

Figure 1000: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

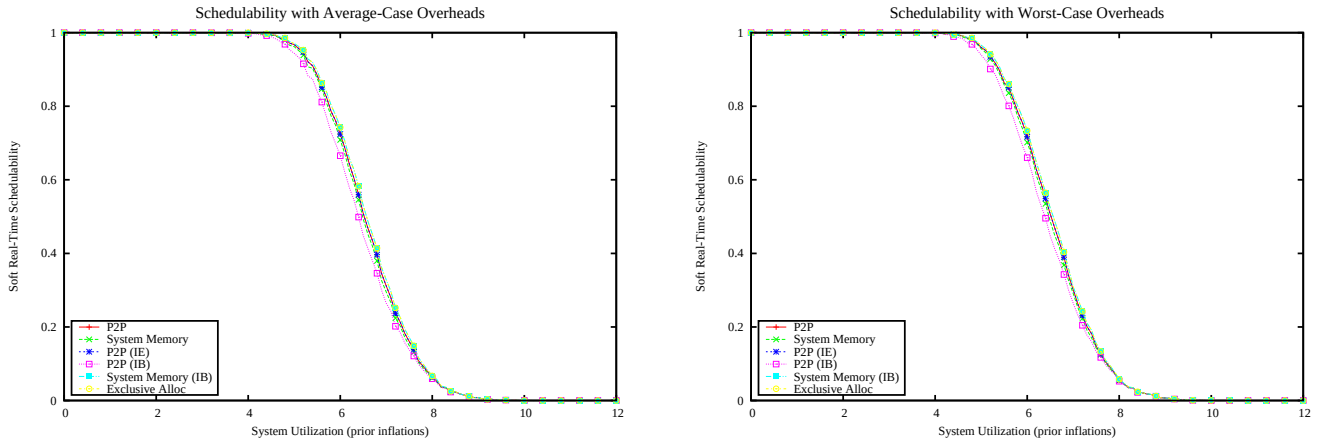

Figure 1001: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

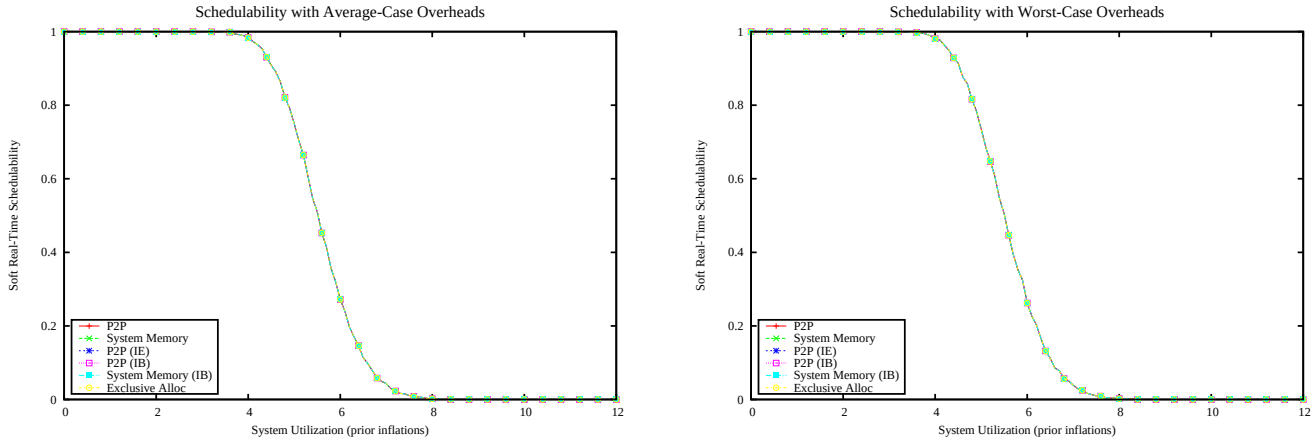

Figure 1002: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

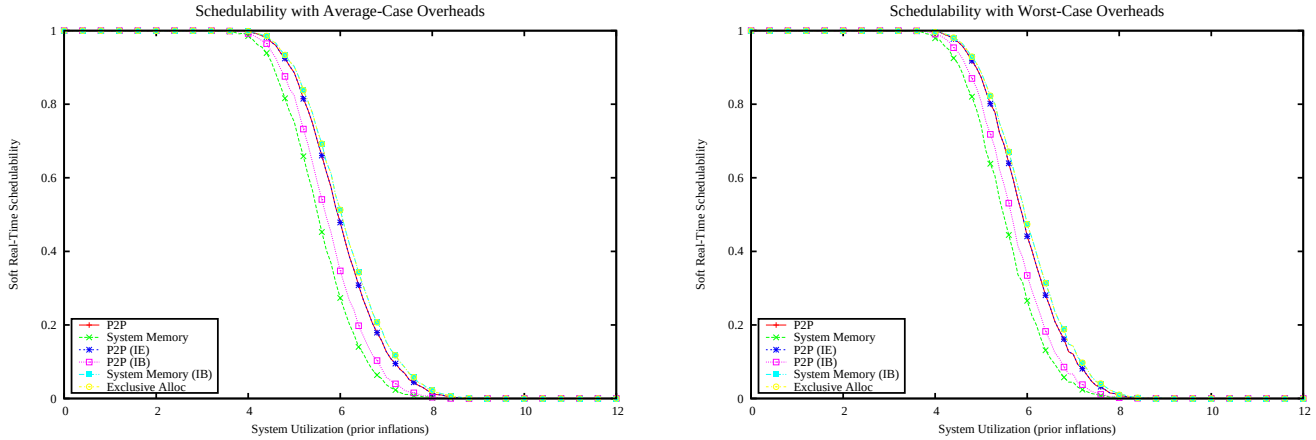

Figure 1003: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

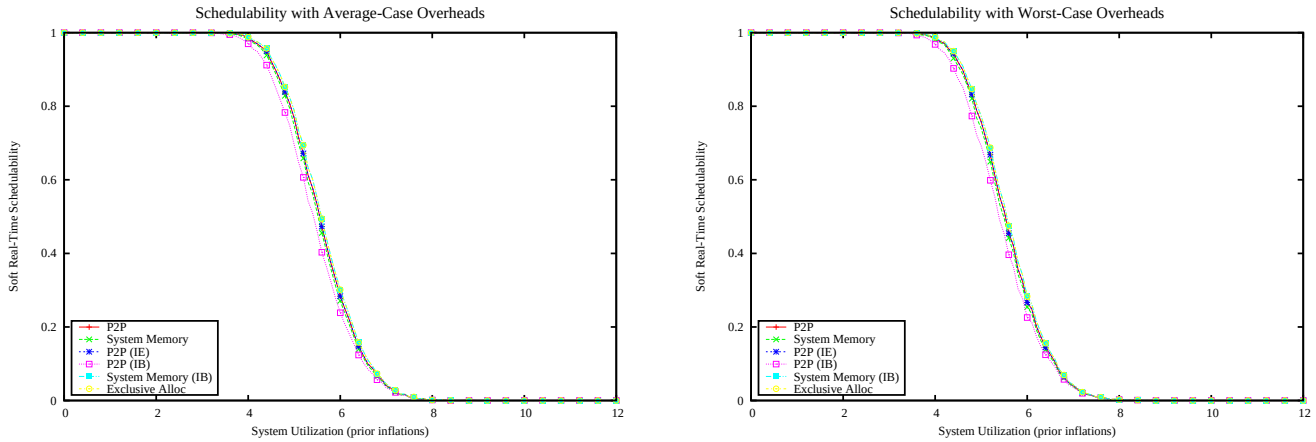

Figure 1004: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

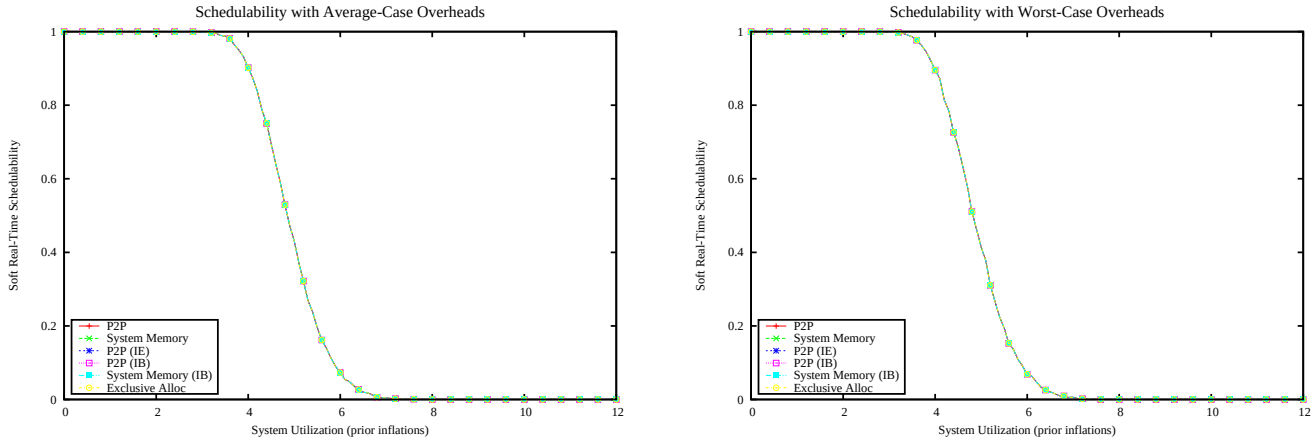

Figure 1005: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

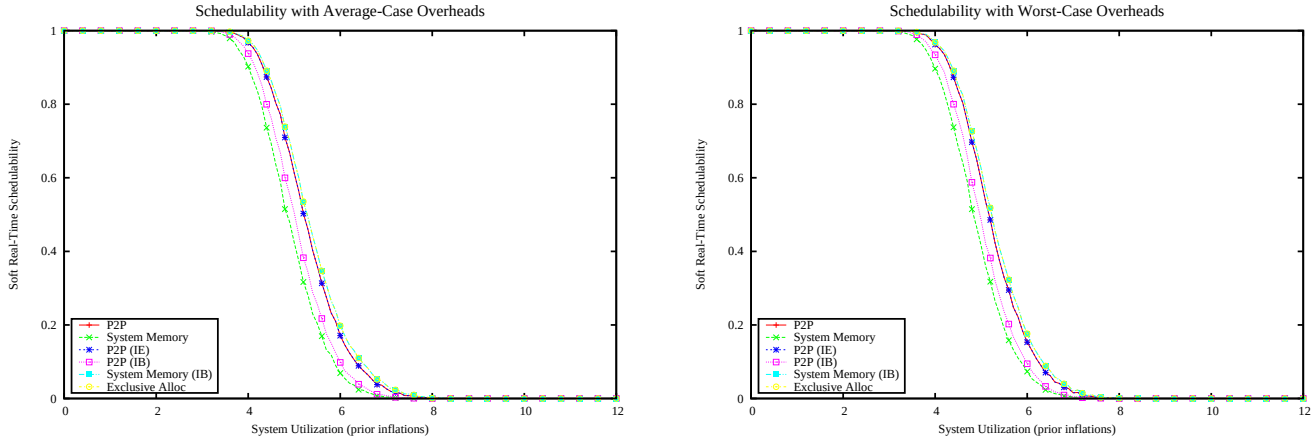

Figure 1006: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

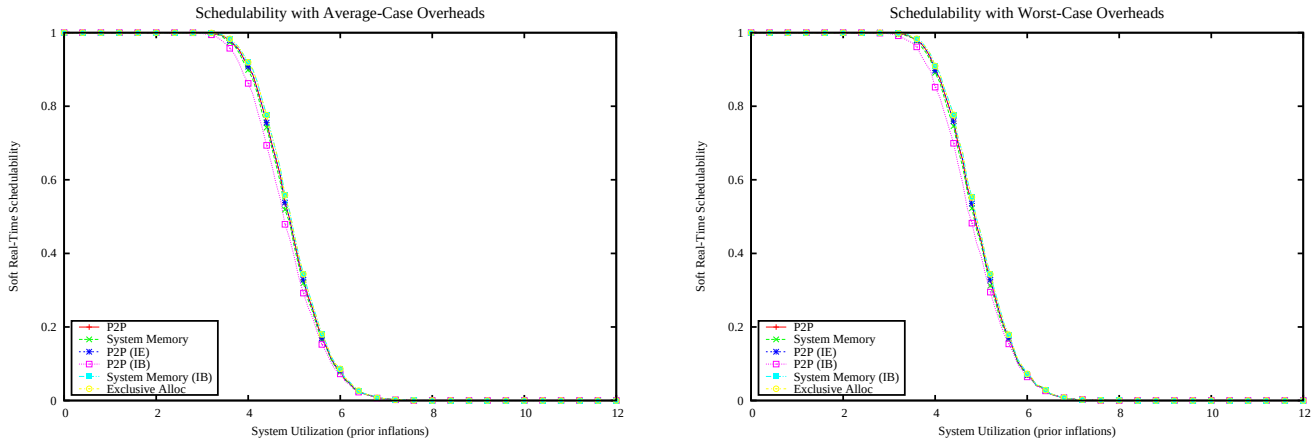

Figure 1007: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

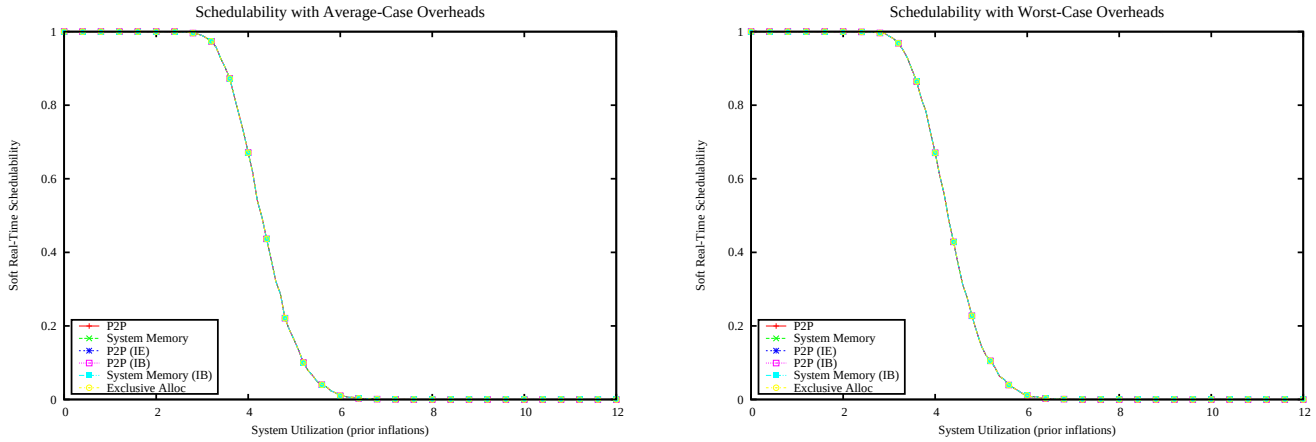

Figure 1008: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

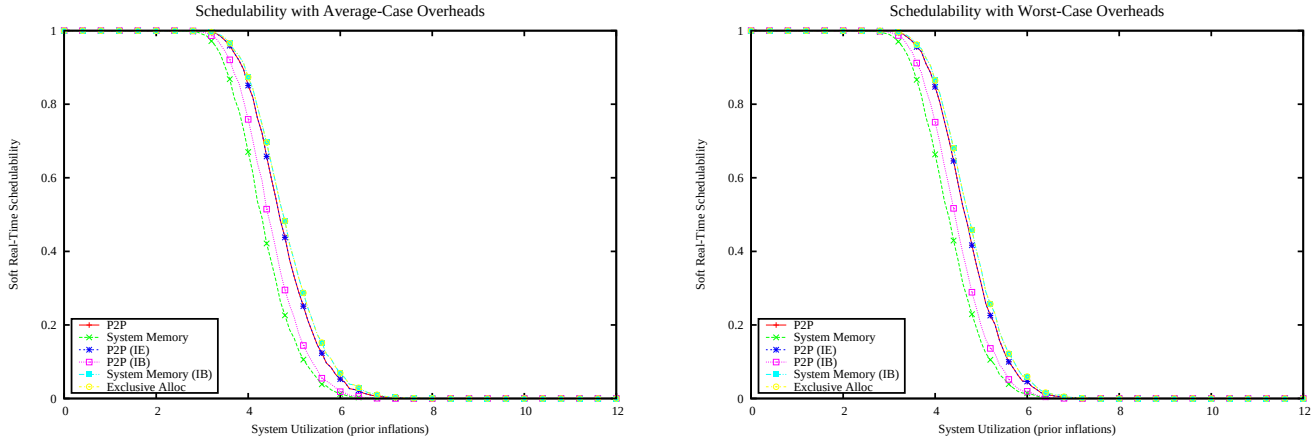

Figure 1009: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

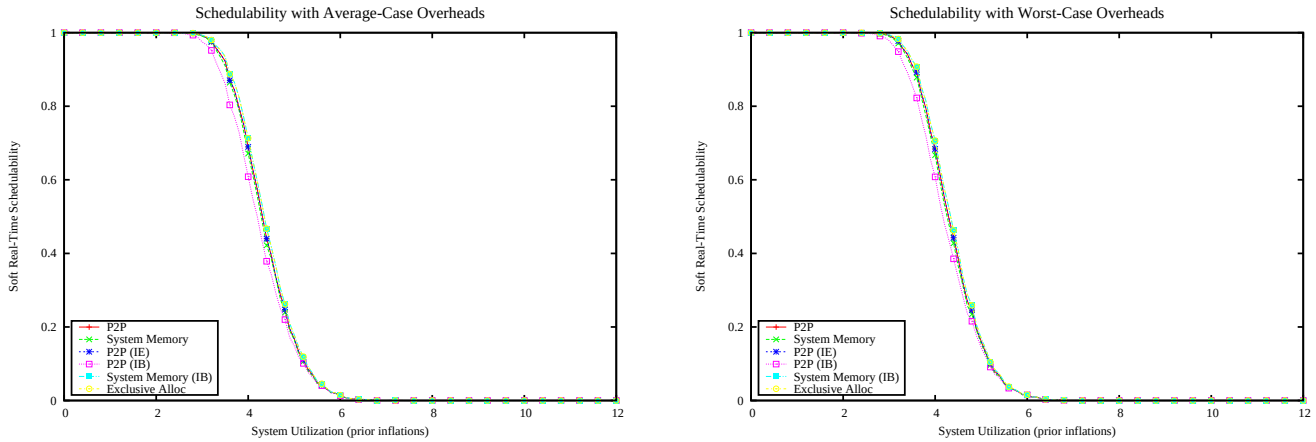

Figure 1010: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

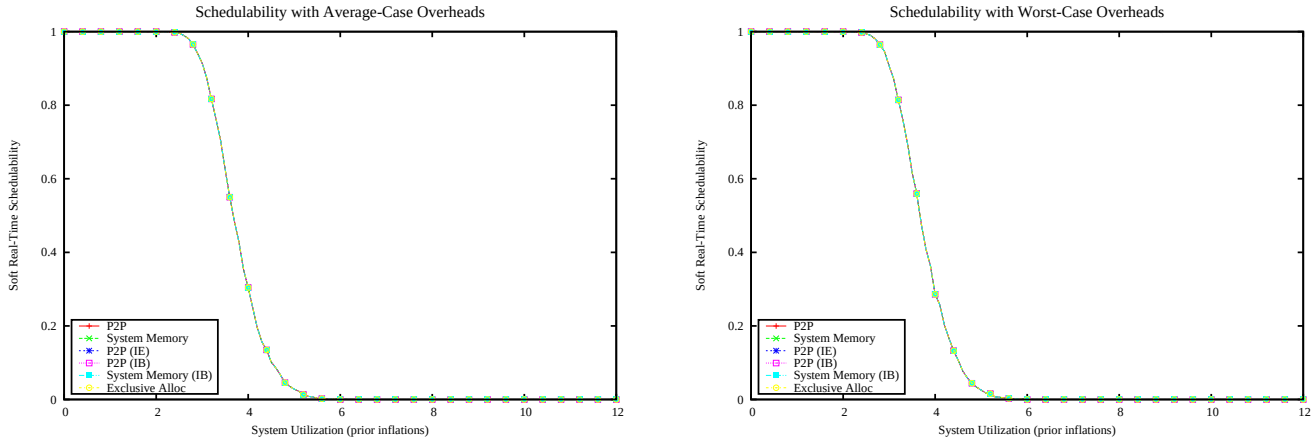

Figure 1011: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

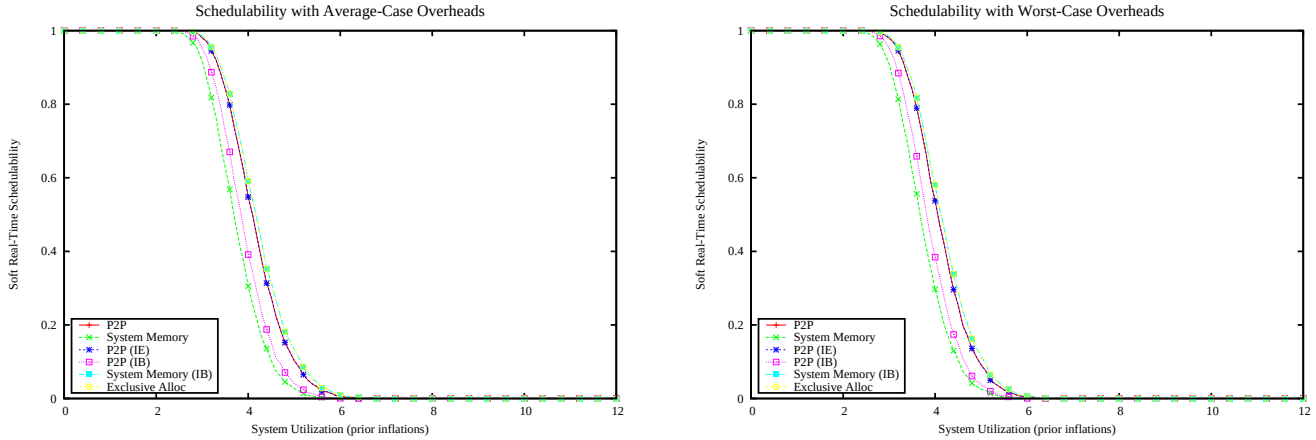

Figure 1012: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

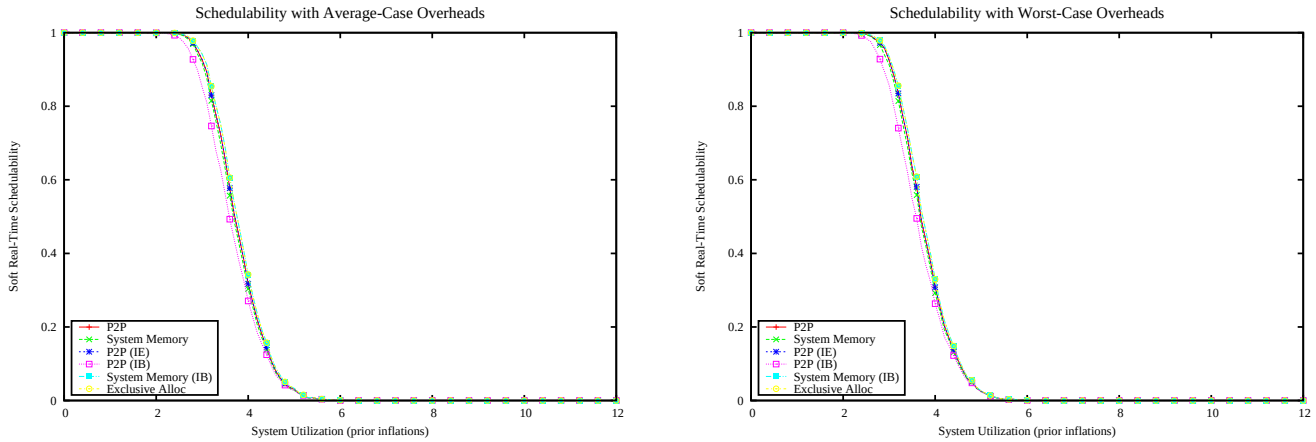

Figure 1013: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

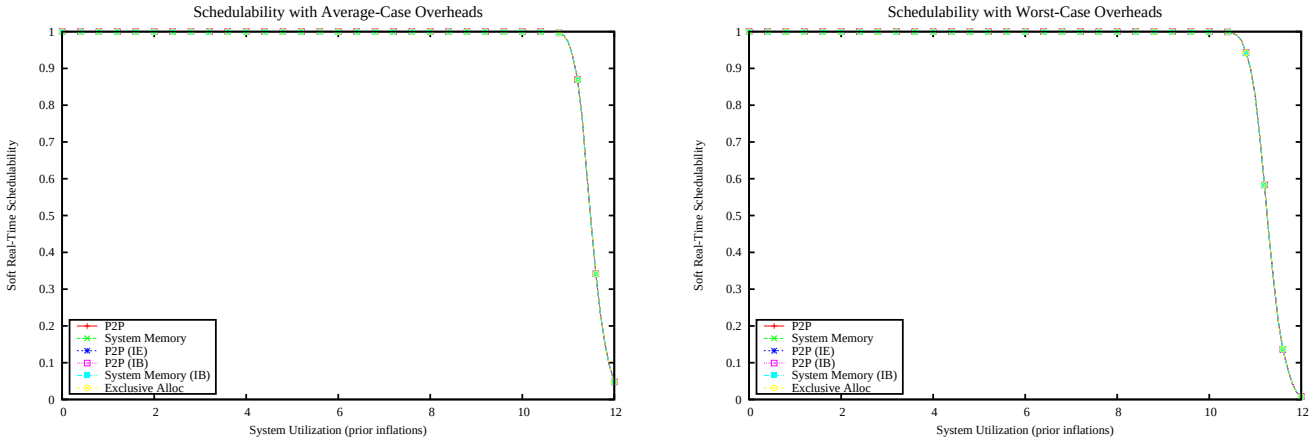

Figure 1014: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

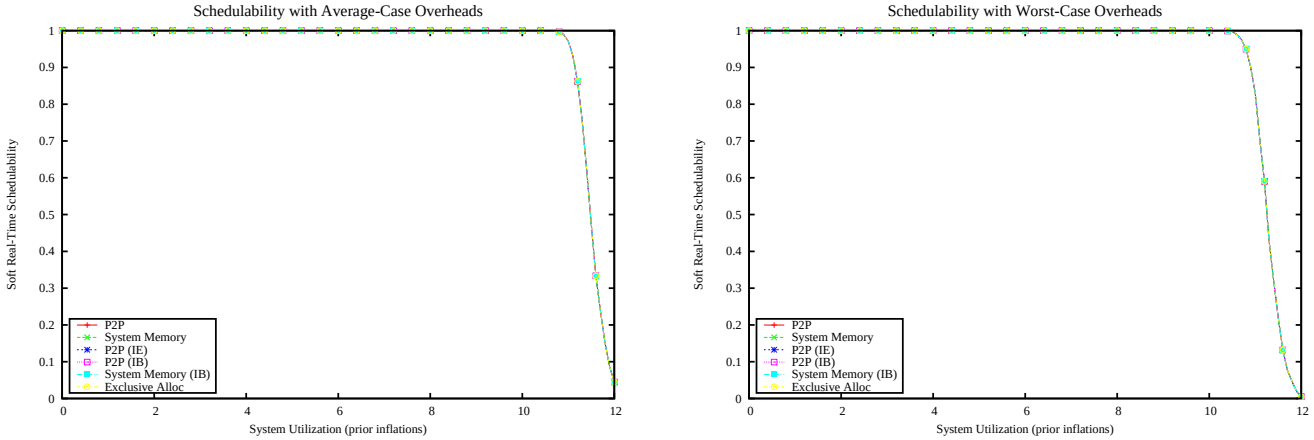

Figure 1015: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

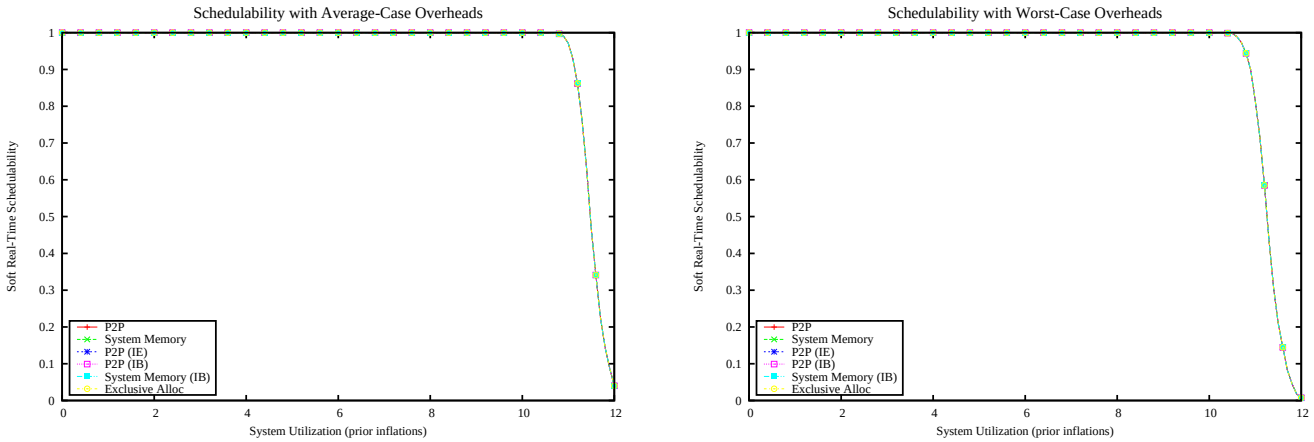

Figure 1016: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

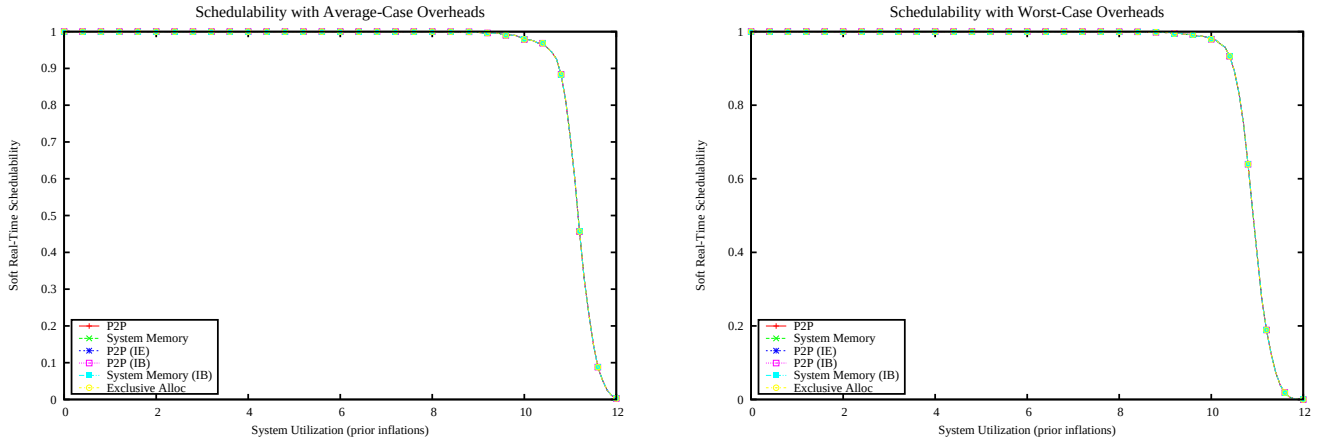

Figure 1017: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

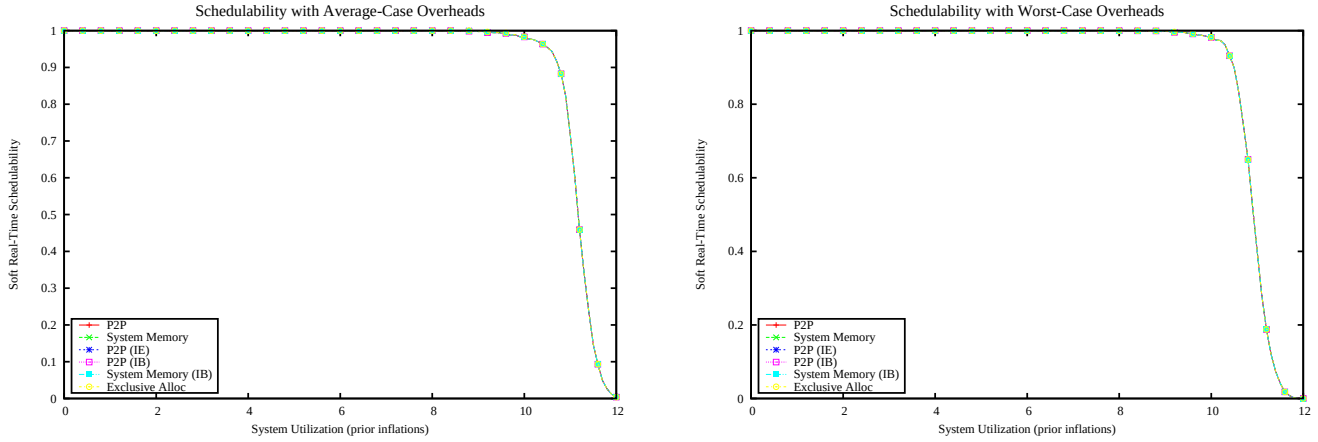

Figure 1018: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

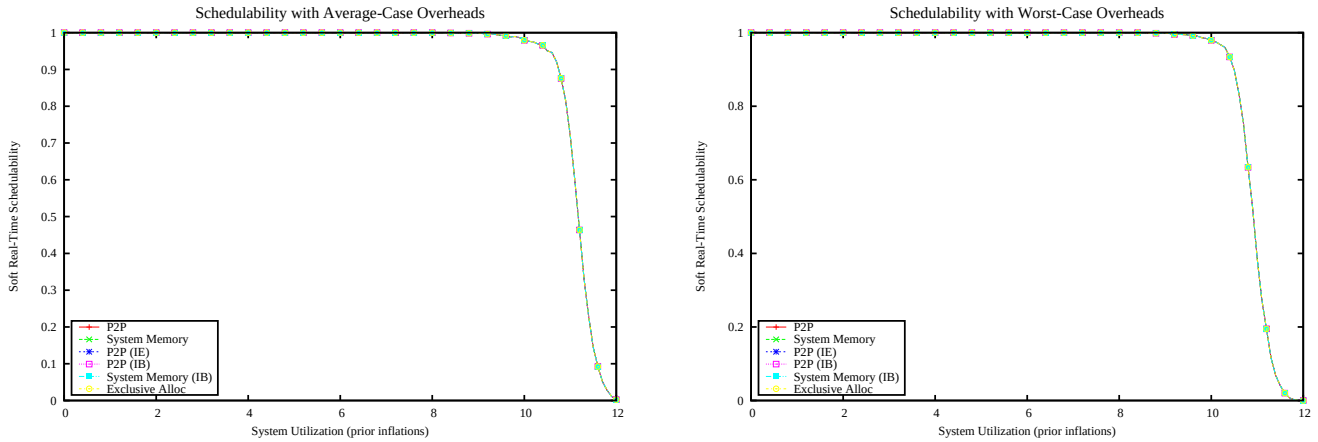

Figure 1019: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

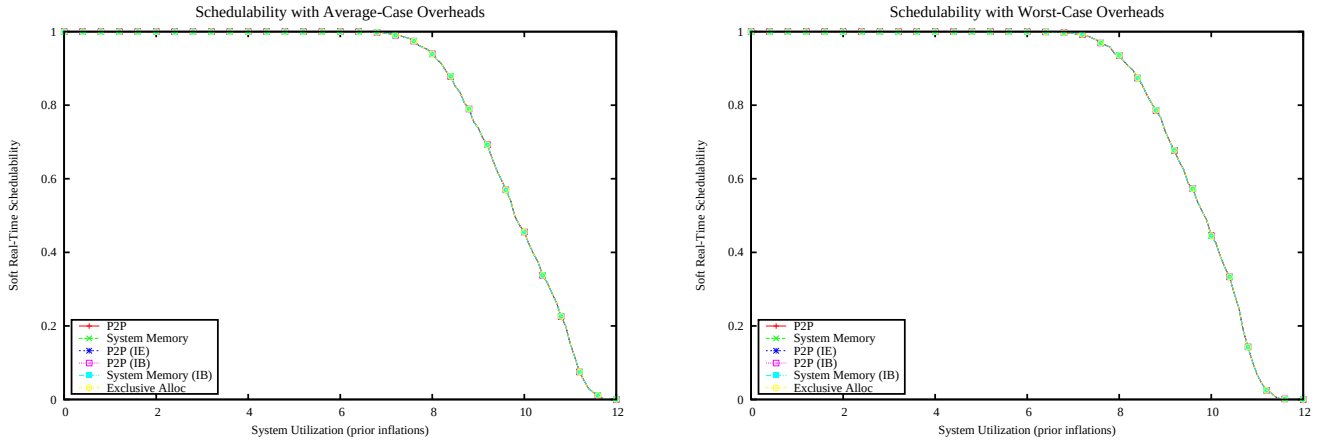

Figure 1020: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

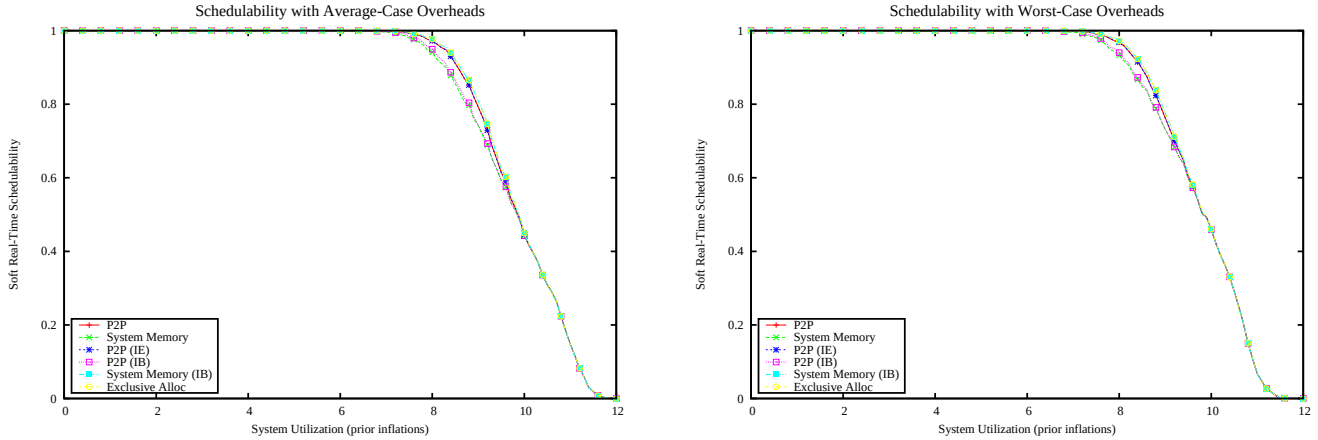

Figure 1021: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

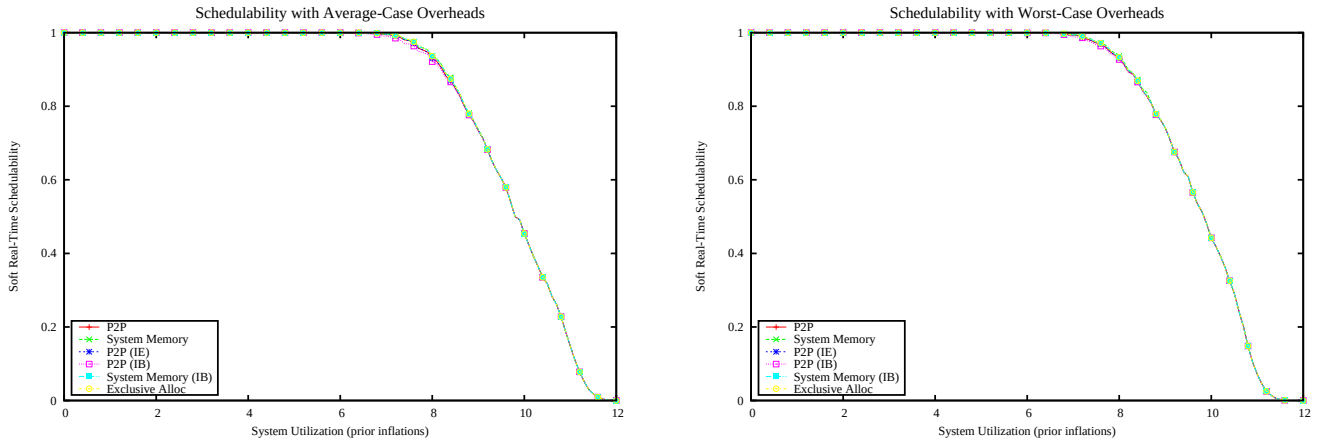

Figure 1022: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

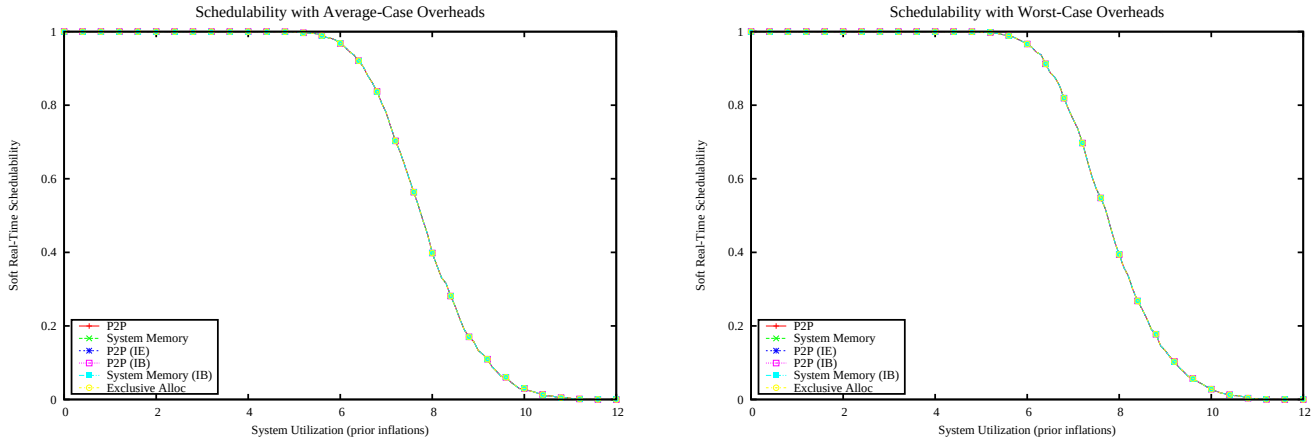

Figure 1023: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

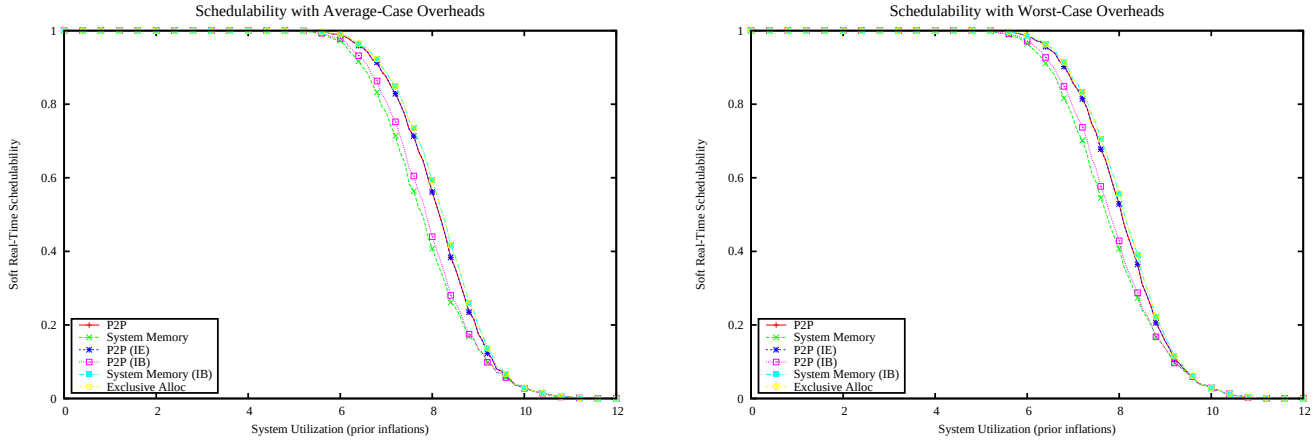

Figure 1024: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

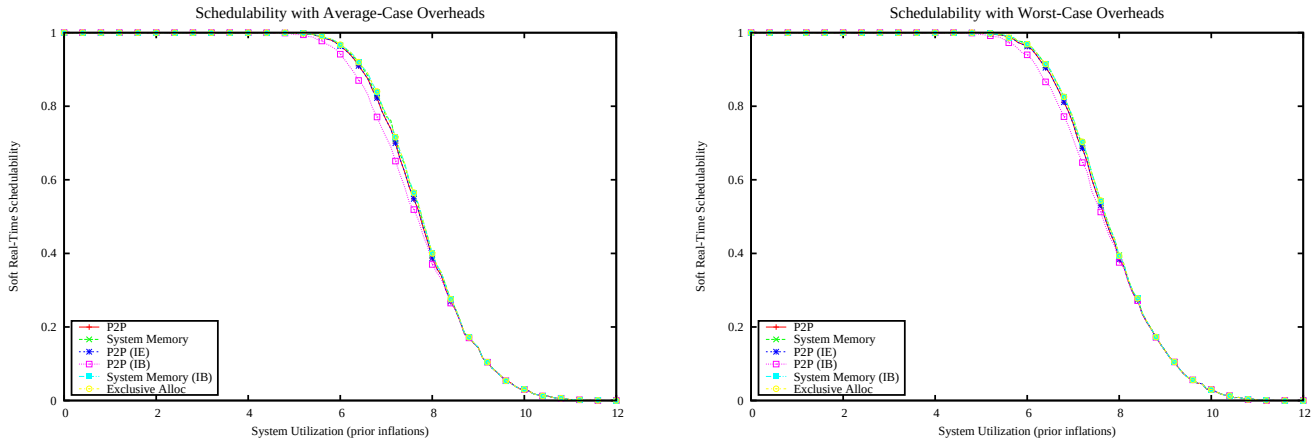

Figure 1025: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

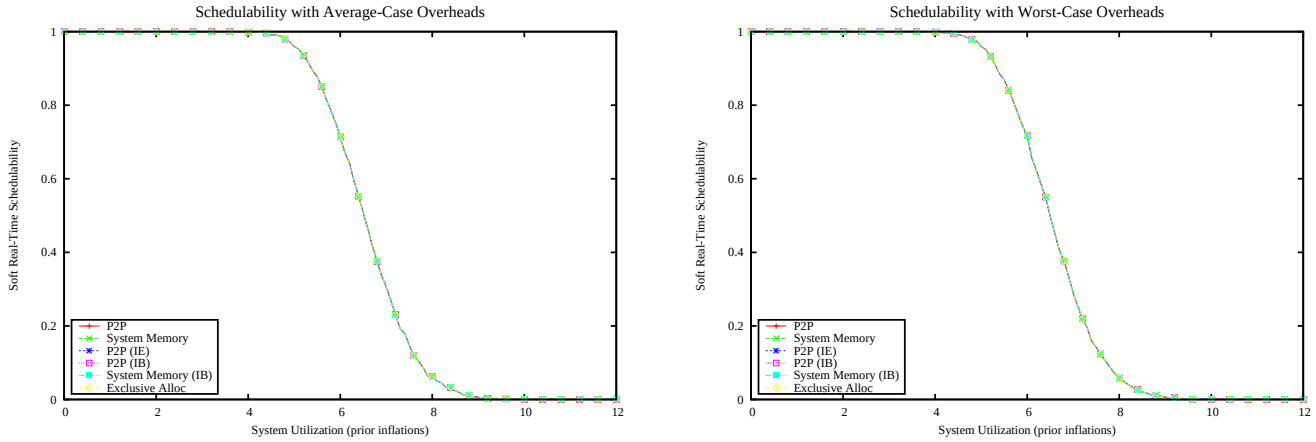

Figure 1026: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

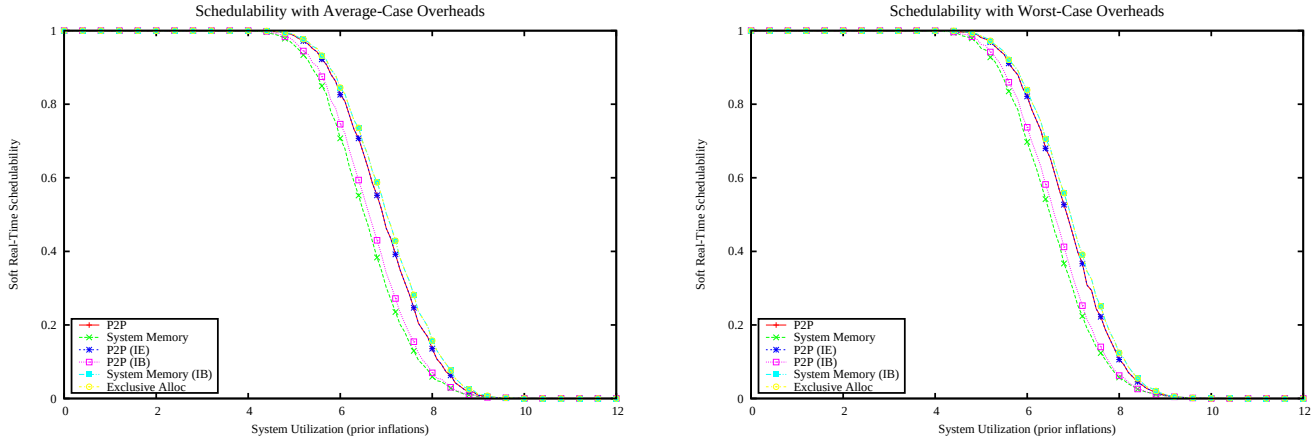

Figure 1027: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

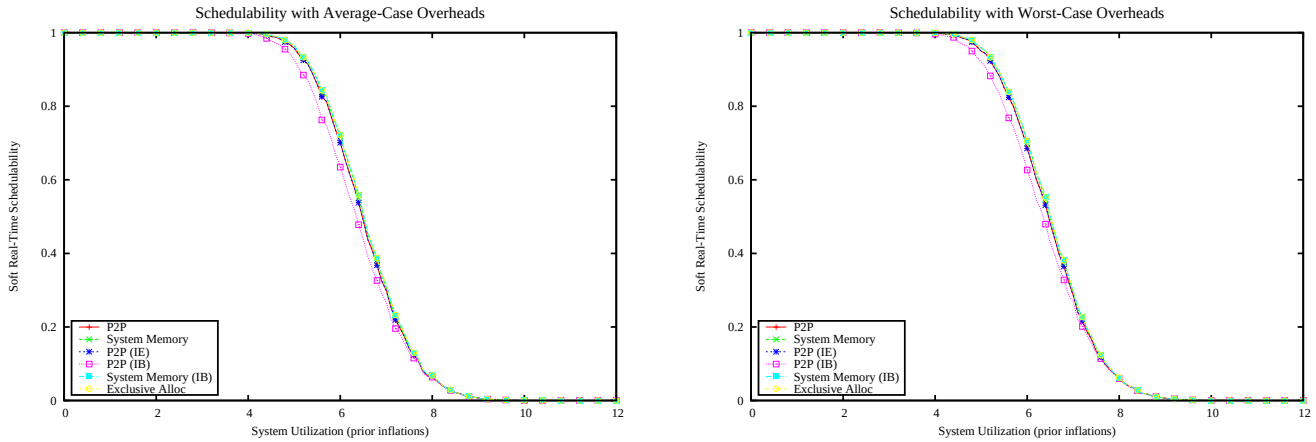

Figure 1028: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

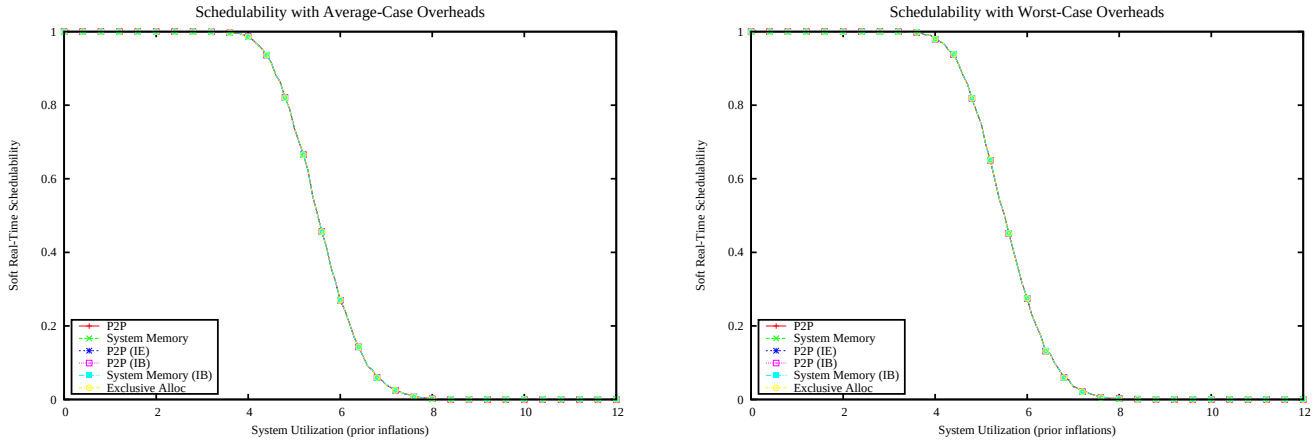

Figure 1029: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

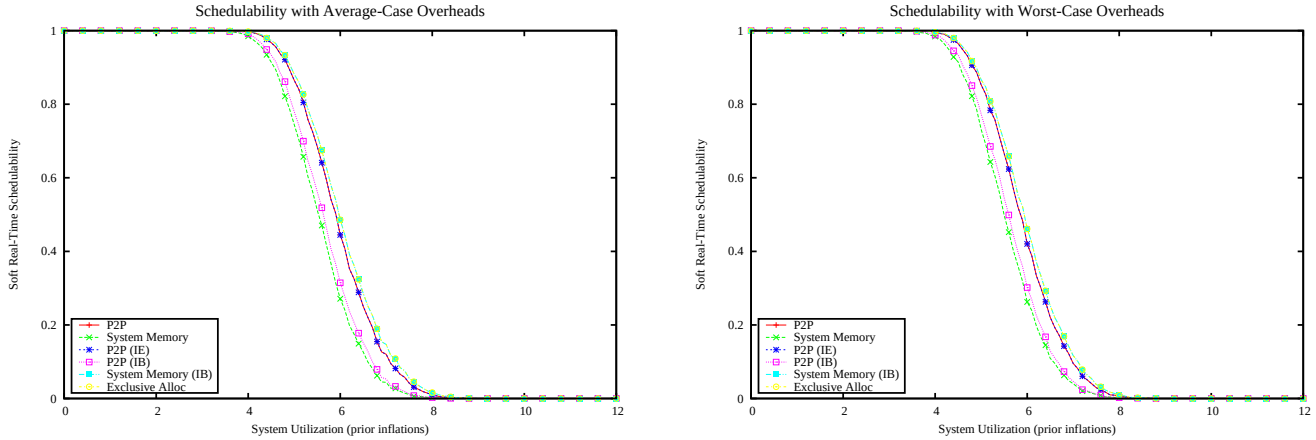

Figure 1030: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

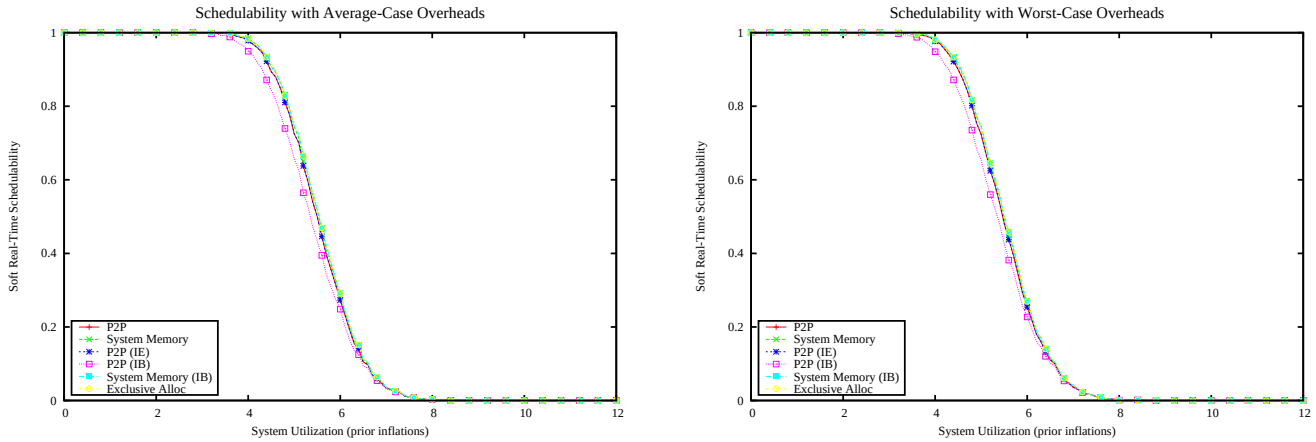

Figure 1031: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

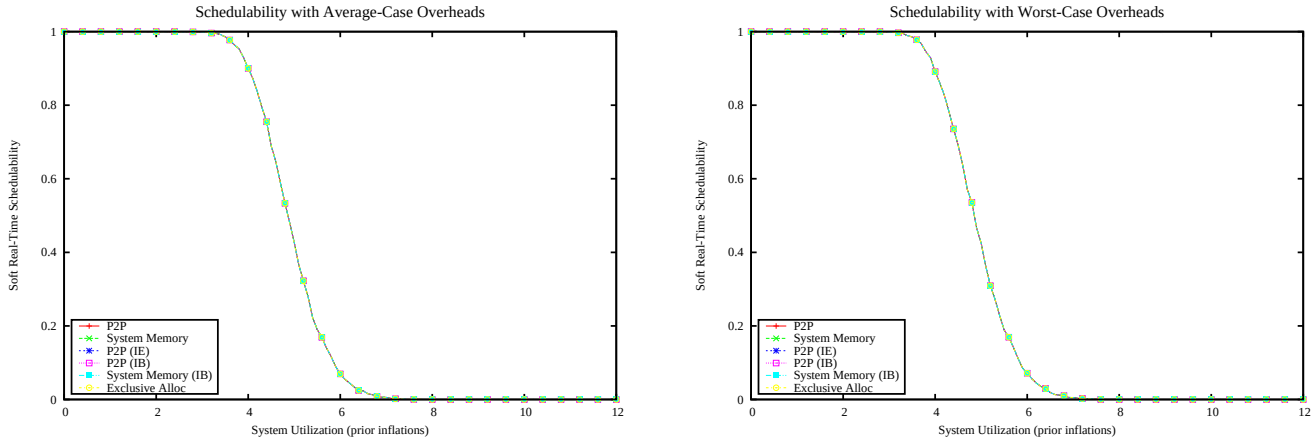

Figure 1032: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

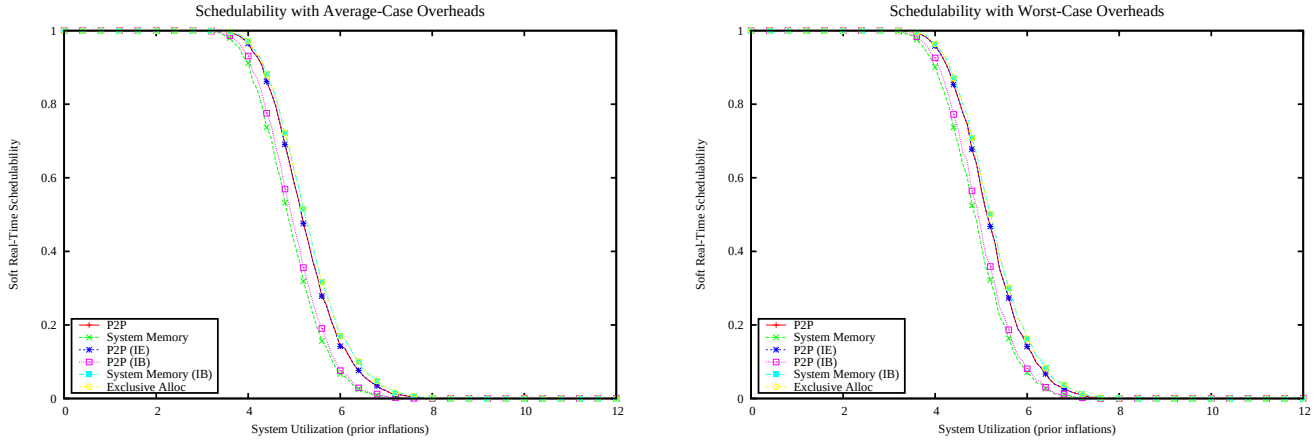

Figure 1033: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

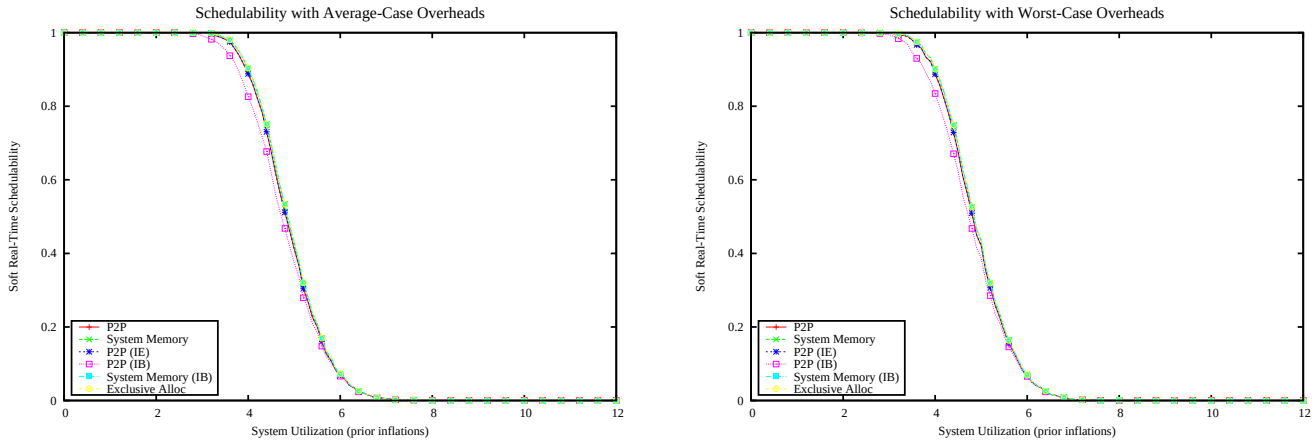

Figure 1034: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

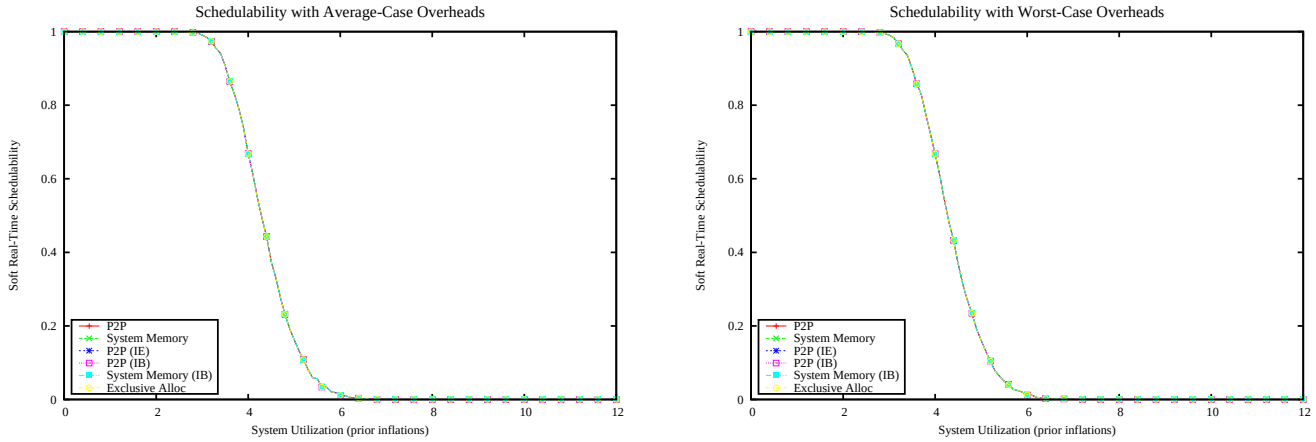

Figure 1035: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

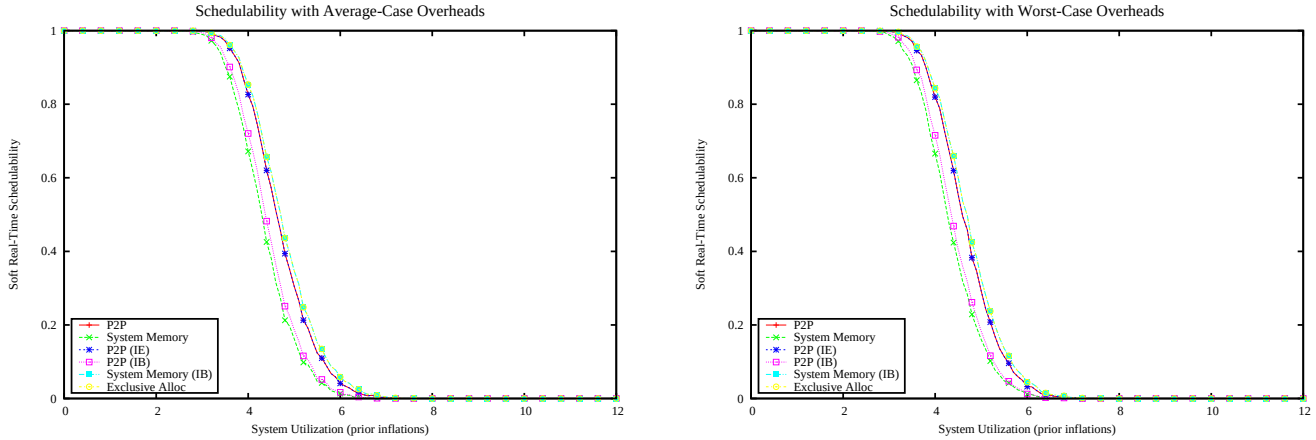

Figure 1036: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

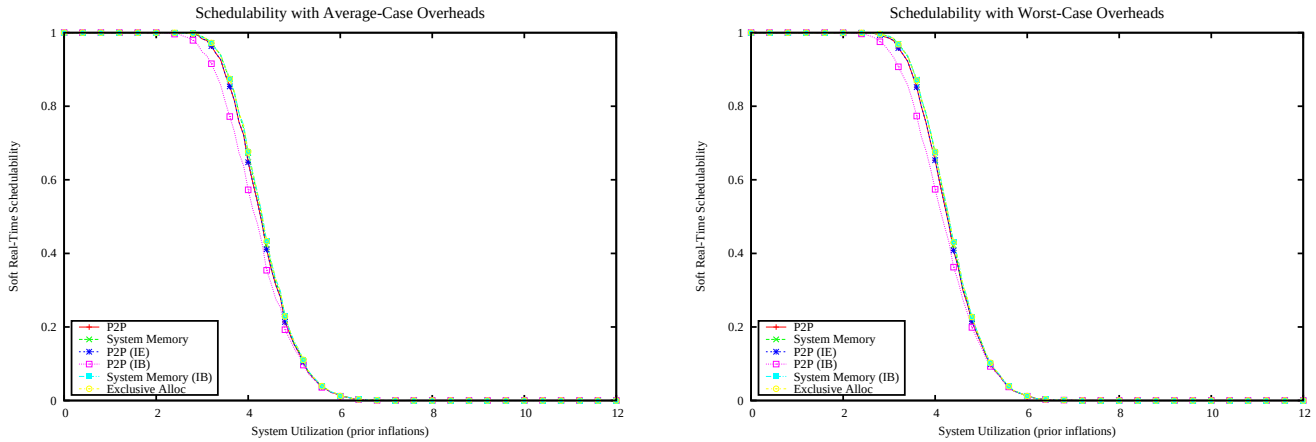

Figure 1037: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

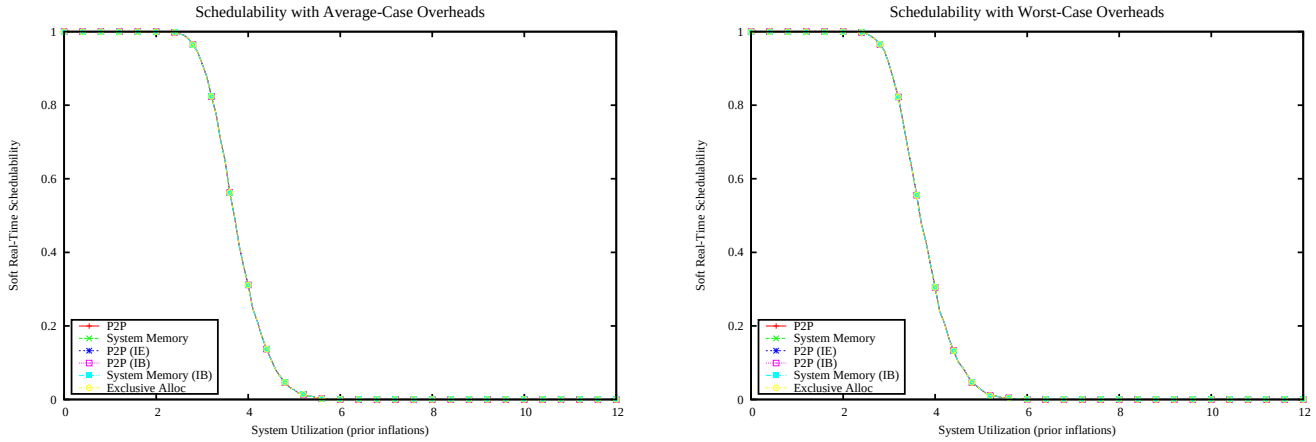

Figure 1038: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

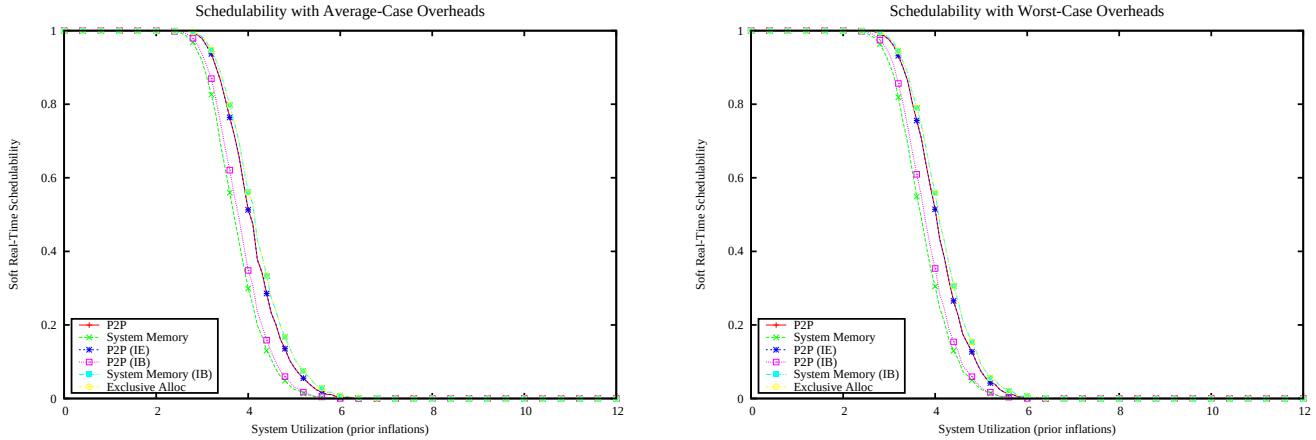

Figure 1039: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

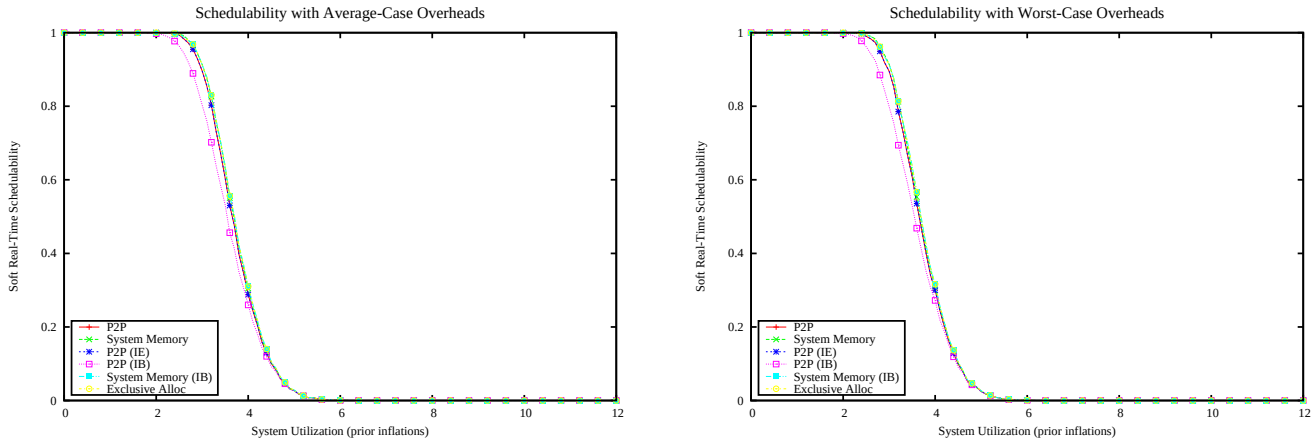

Figure 1040: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

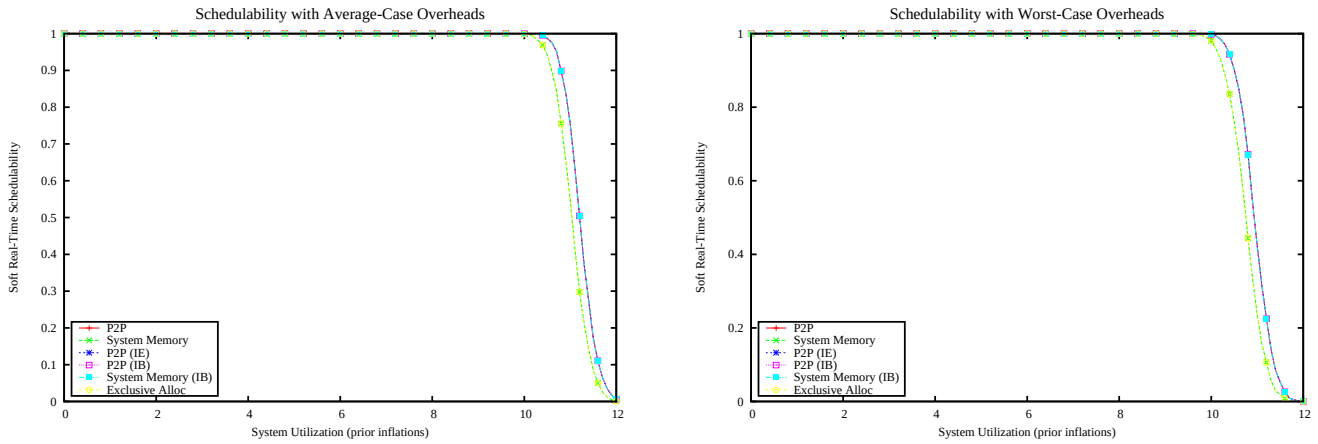

Figure 1041: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

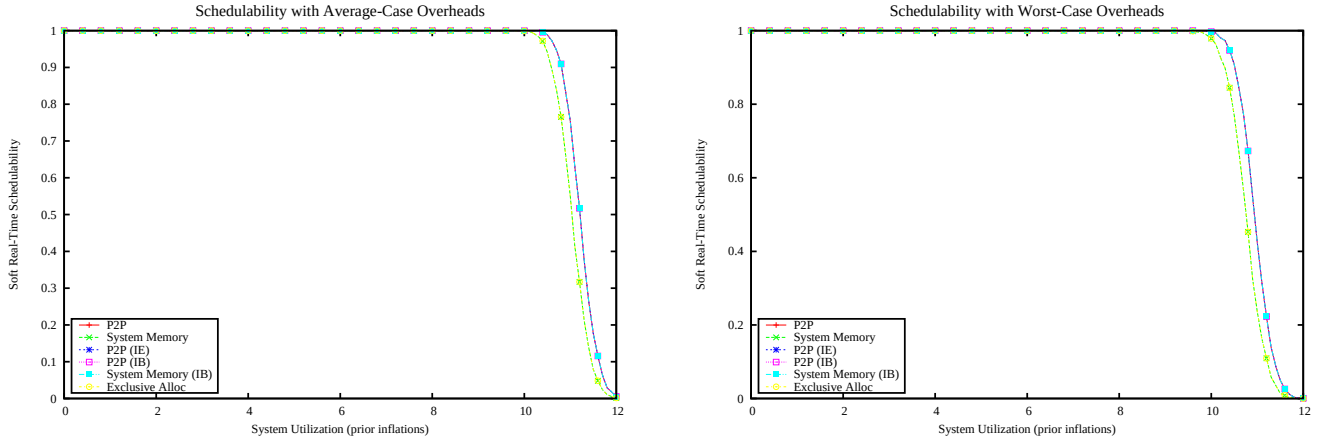

Figure 1042: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

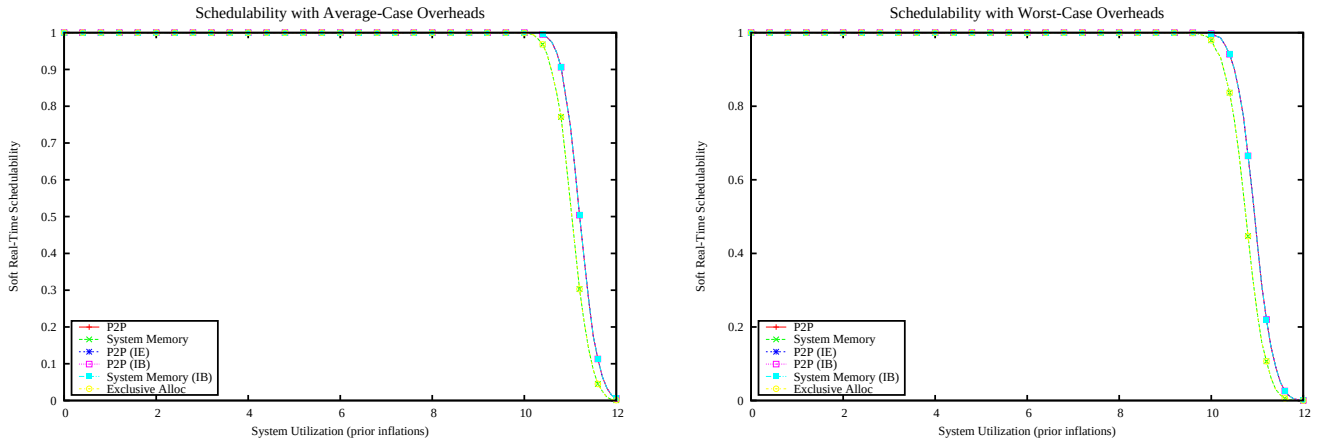

Figure 1043: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

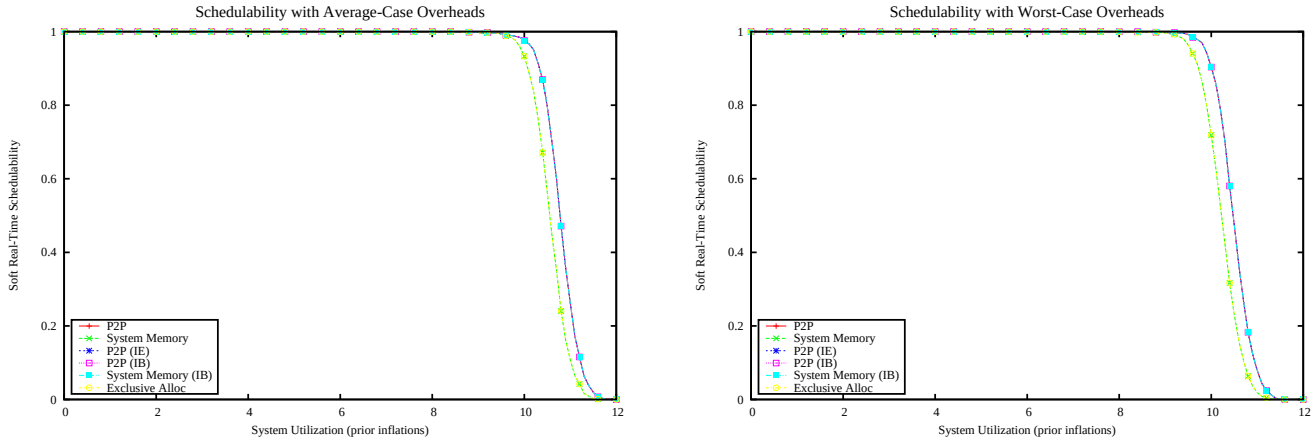

Figure 1044: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

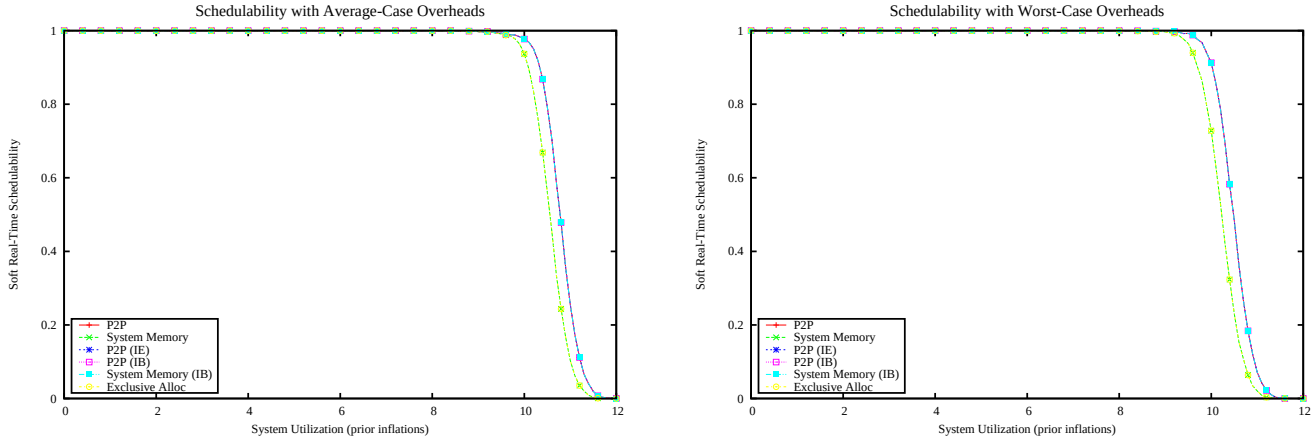

Figure 1045: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

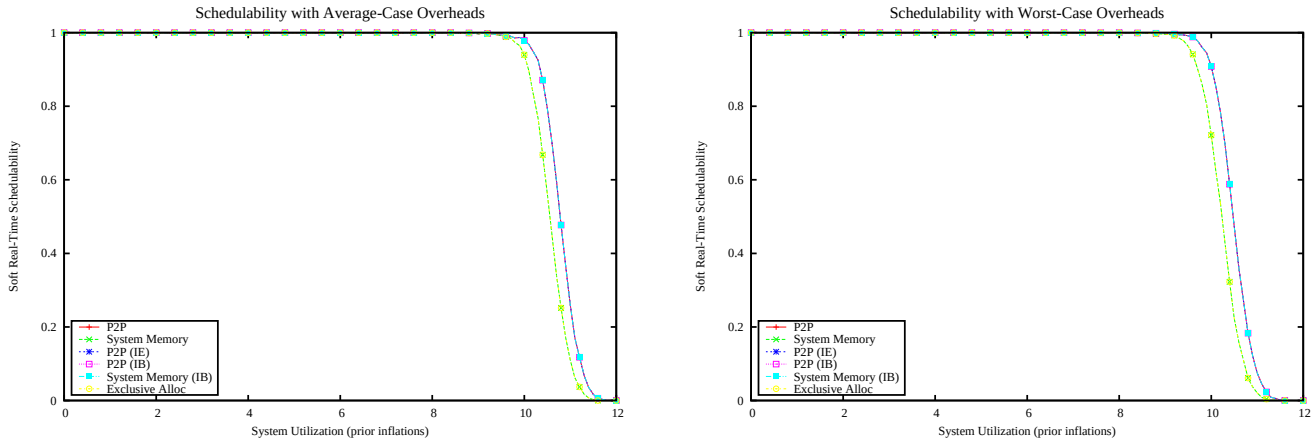

Figure 1046: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

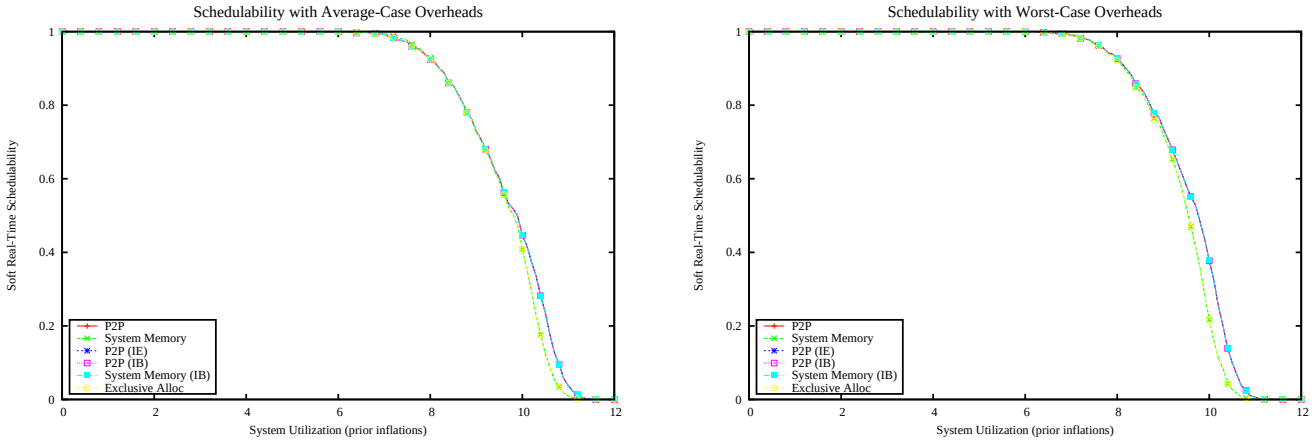

Figure 1047: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

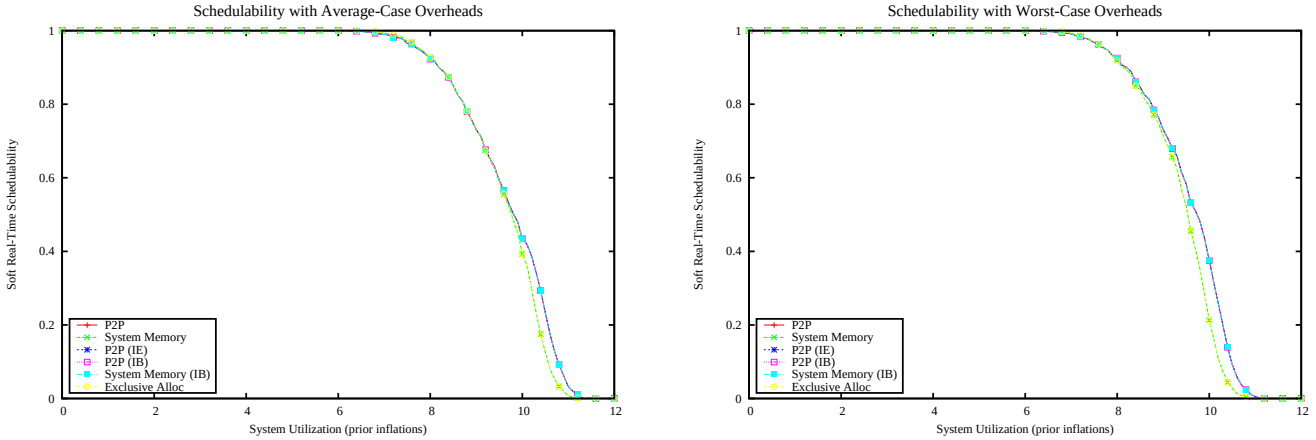

Figure 1048: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

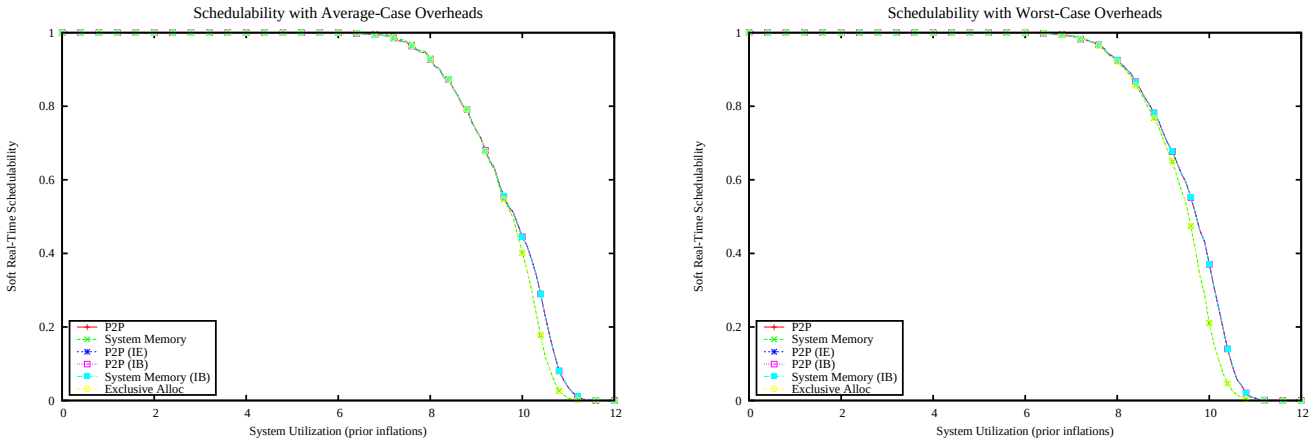

Figure 1049: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

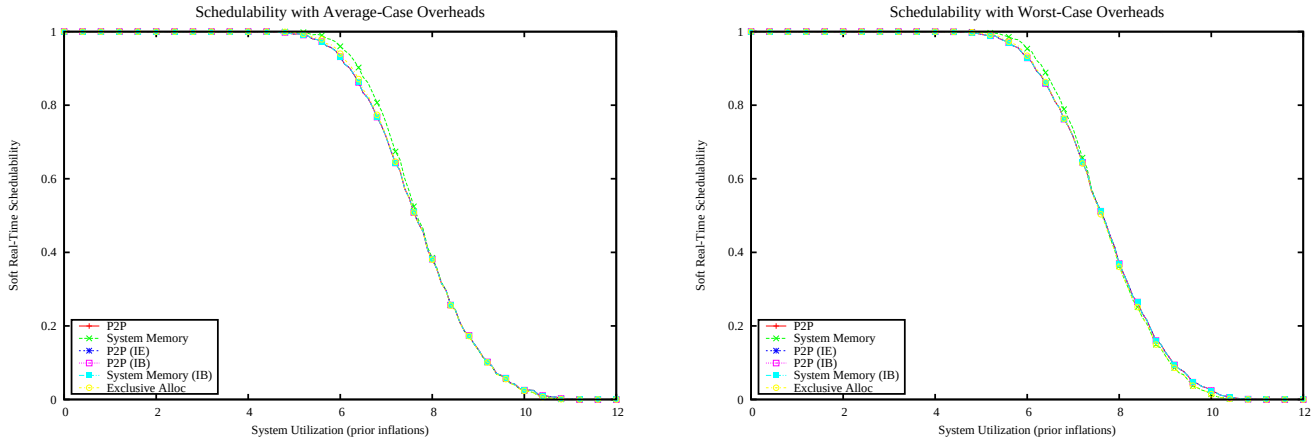

Figure 1050: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

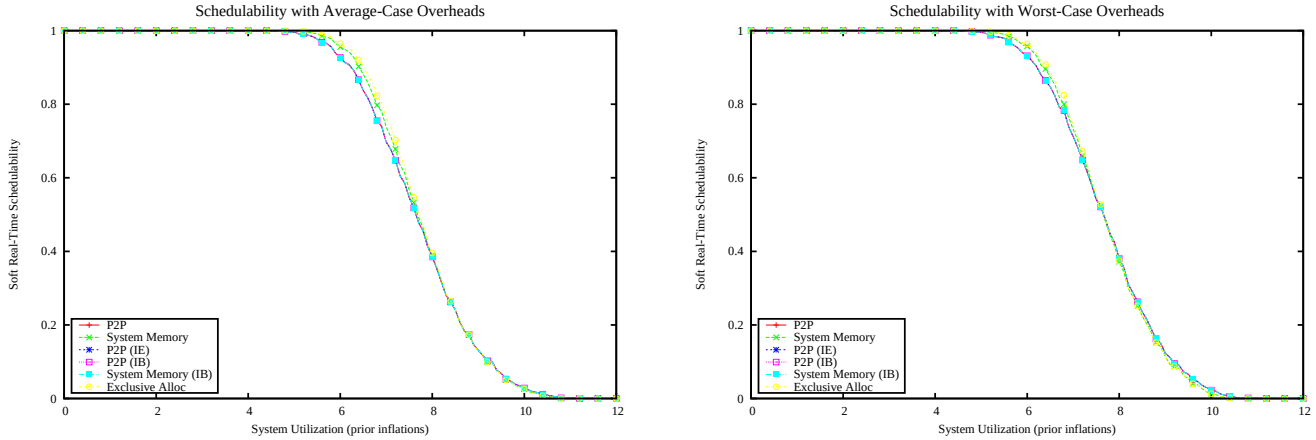

Figure 1051: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

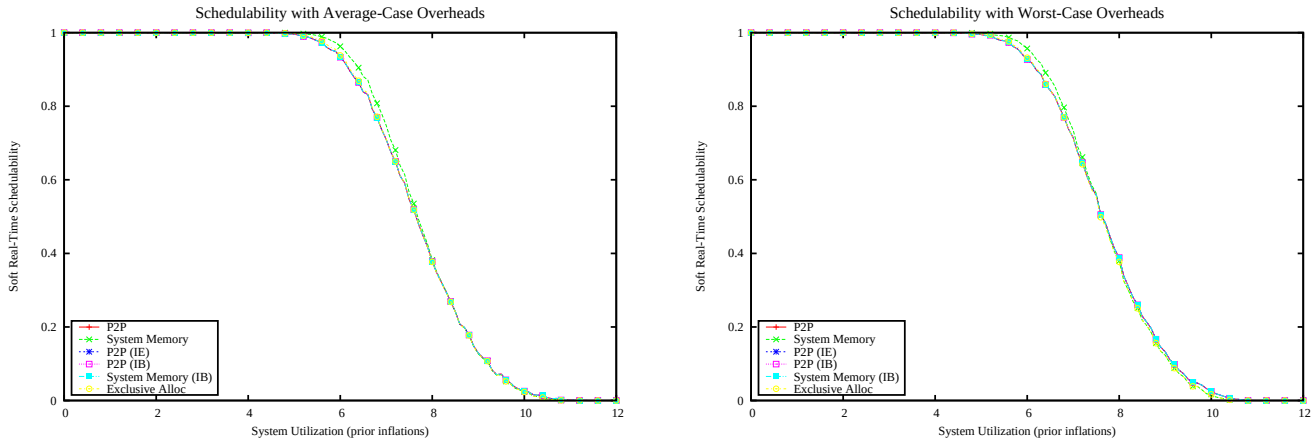

Figure 1052: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

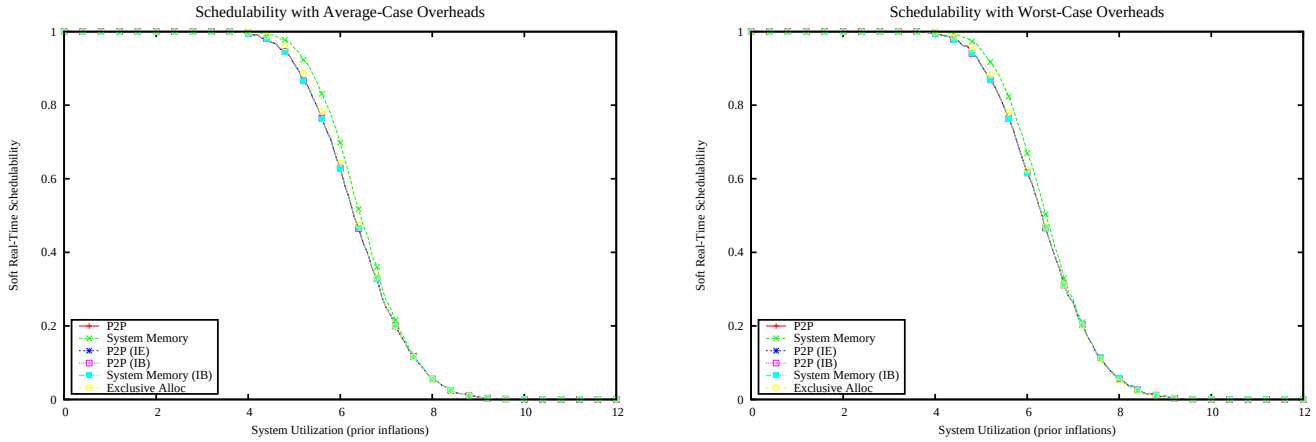

Figure 1053: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

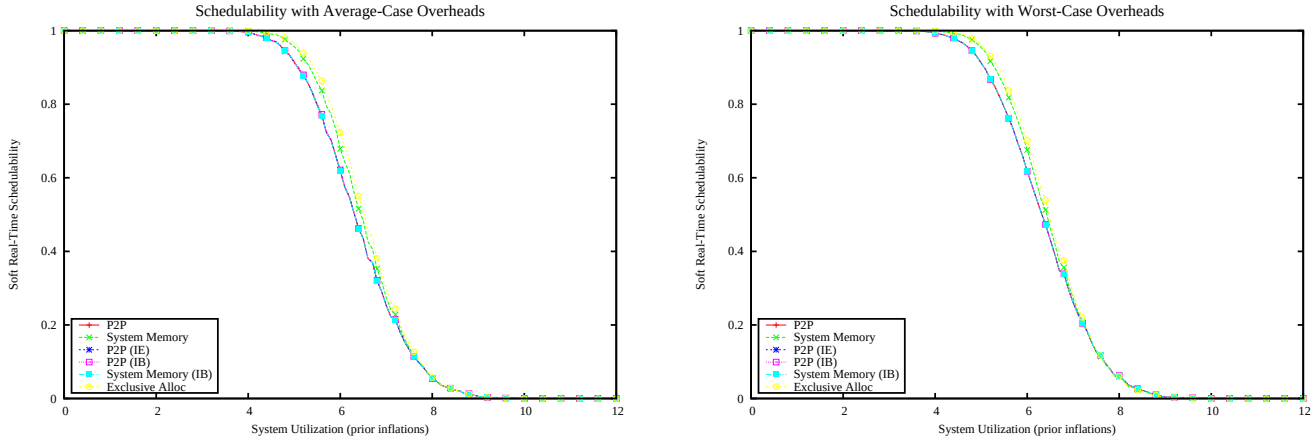

Figure 1054: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

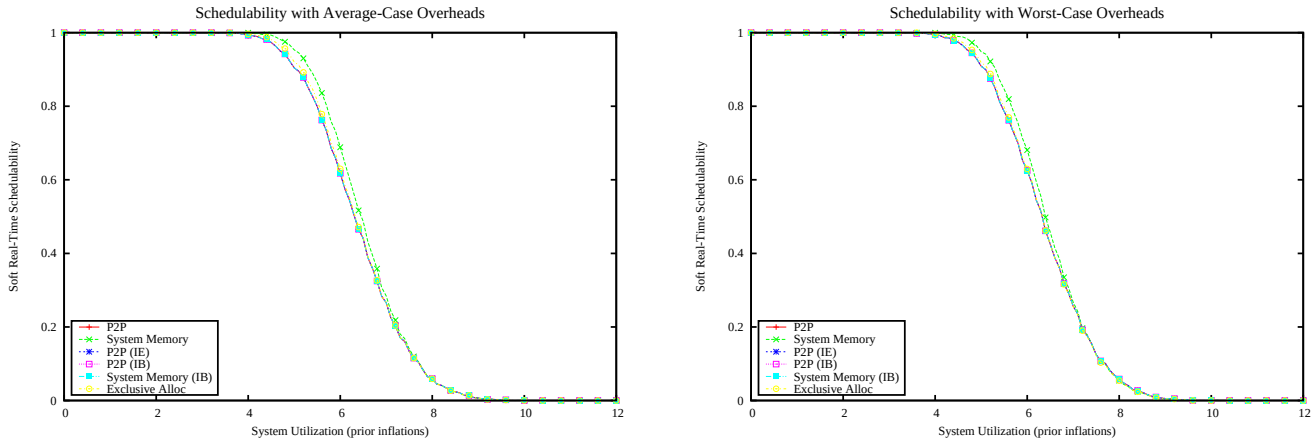

Figure 1055: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

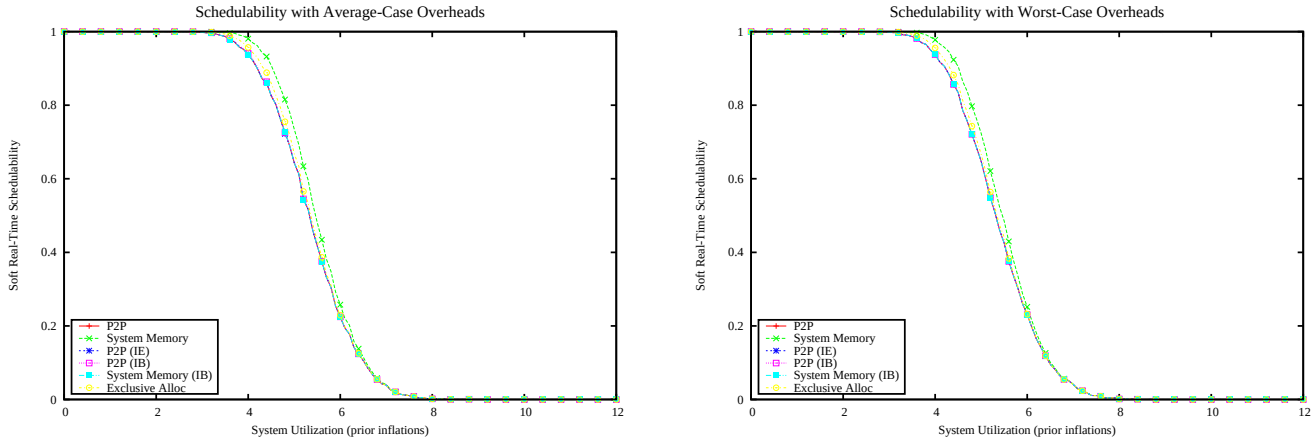

Figure 1056: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

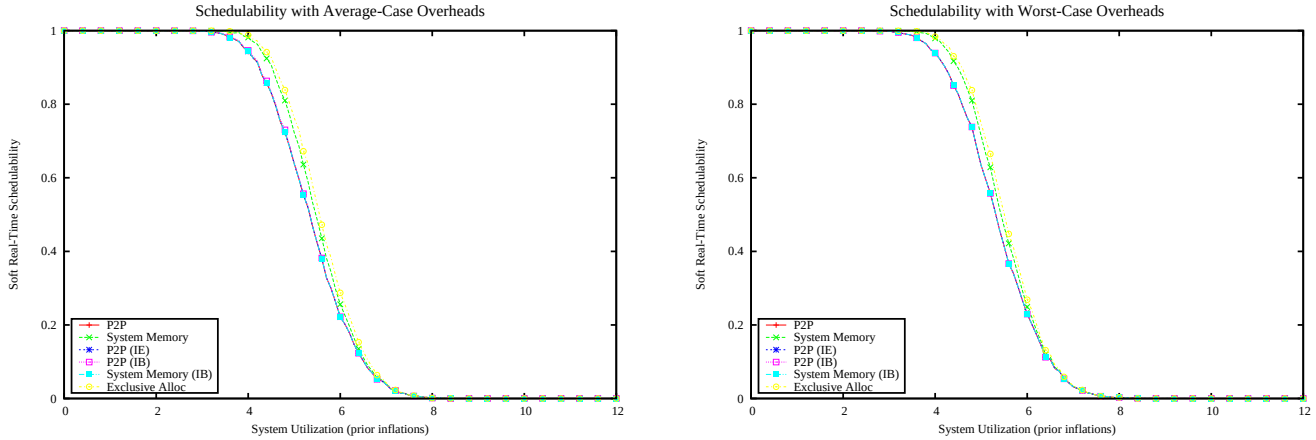

Figure 1057: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

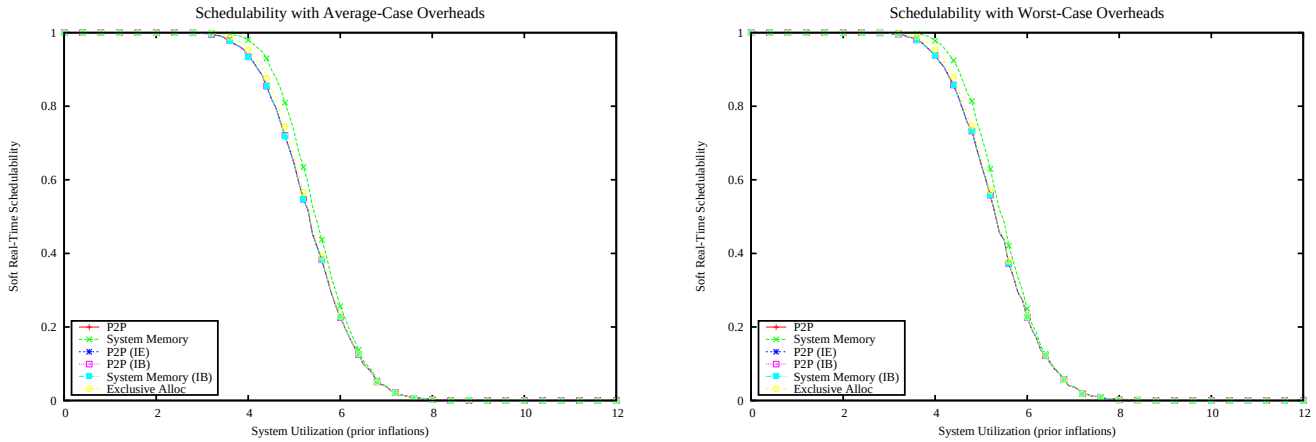

Figure 1058: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

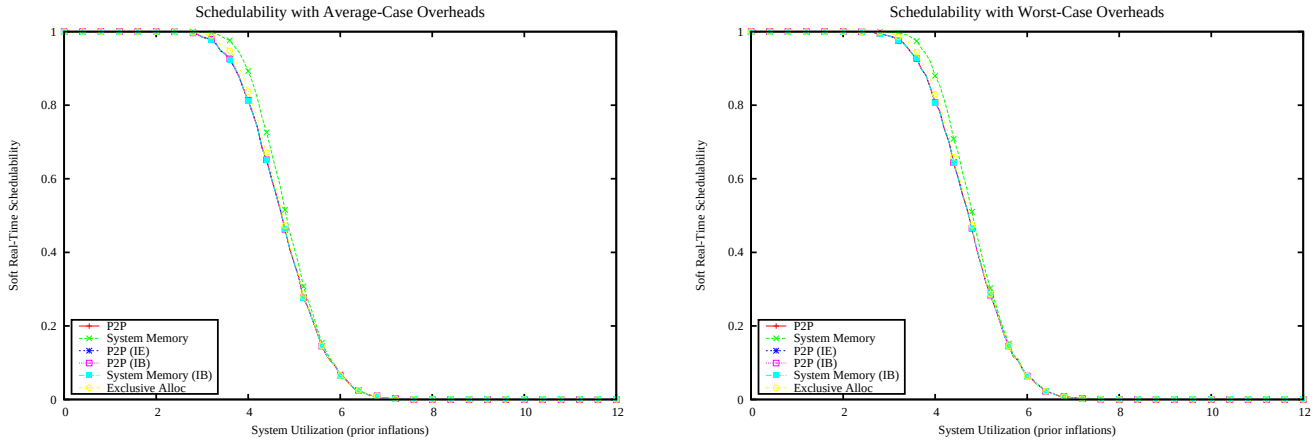

Figure 1059: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

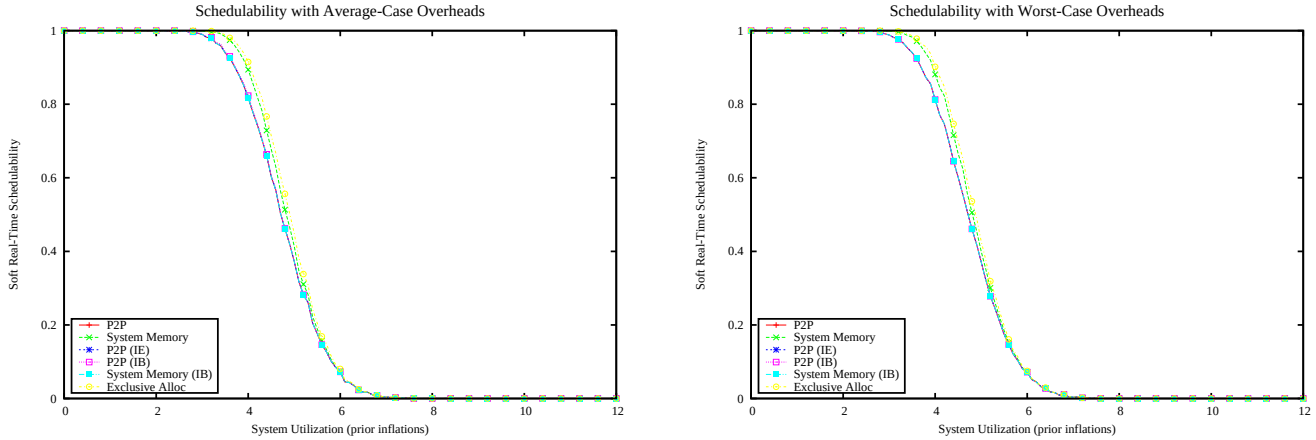

Figure 1060: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

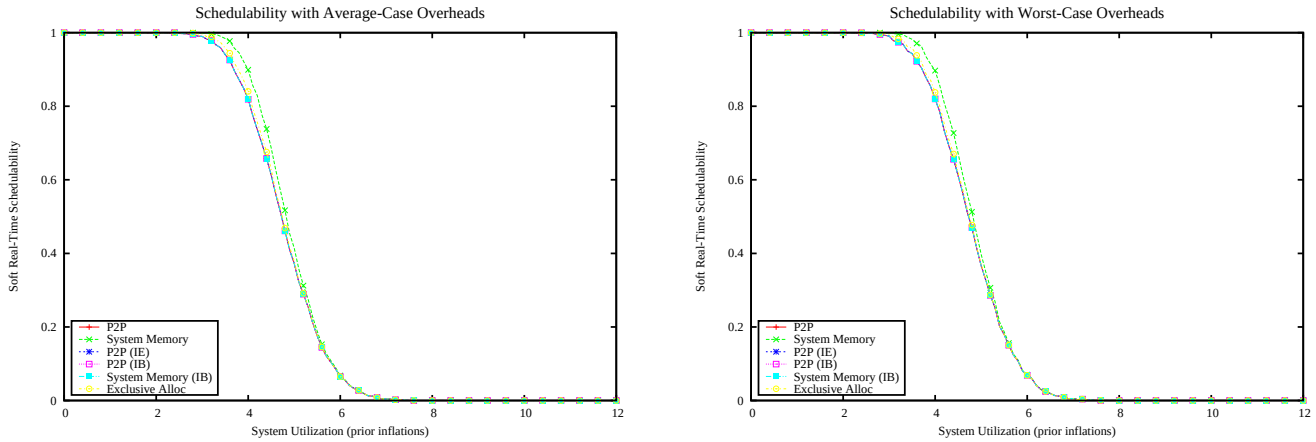

Figure 1061: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

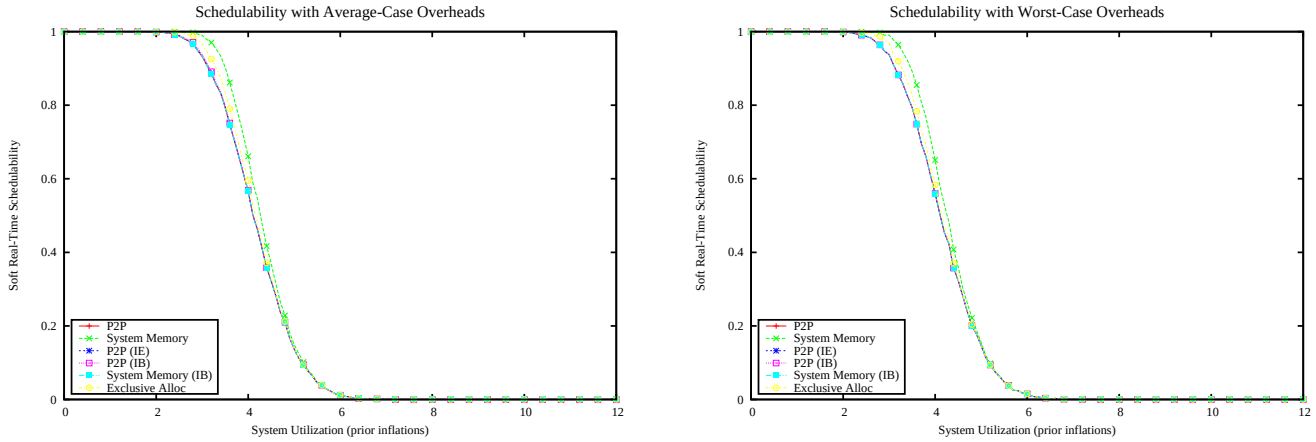

Figure 1062: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

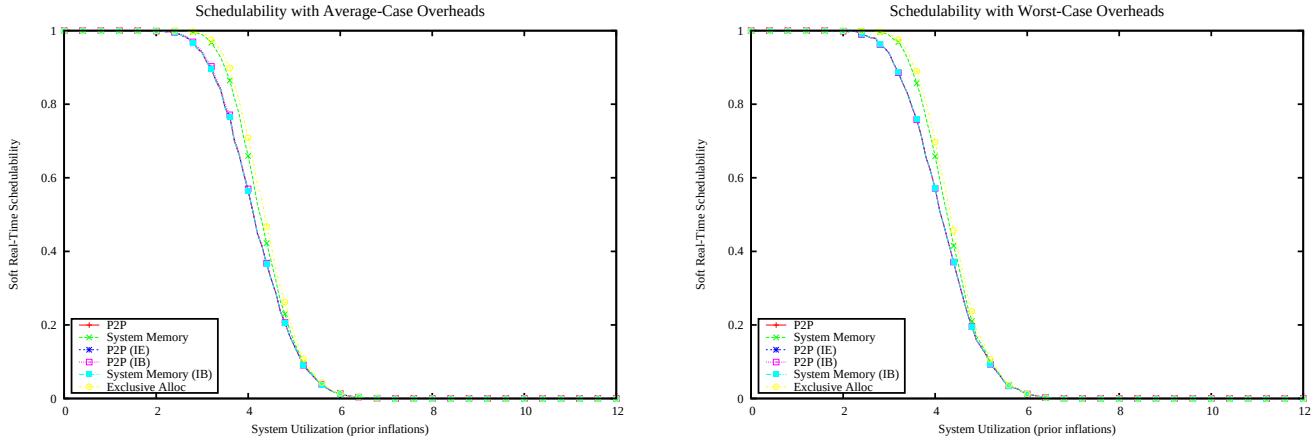

Figure 1063: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

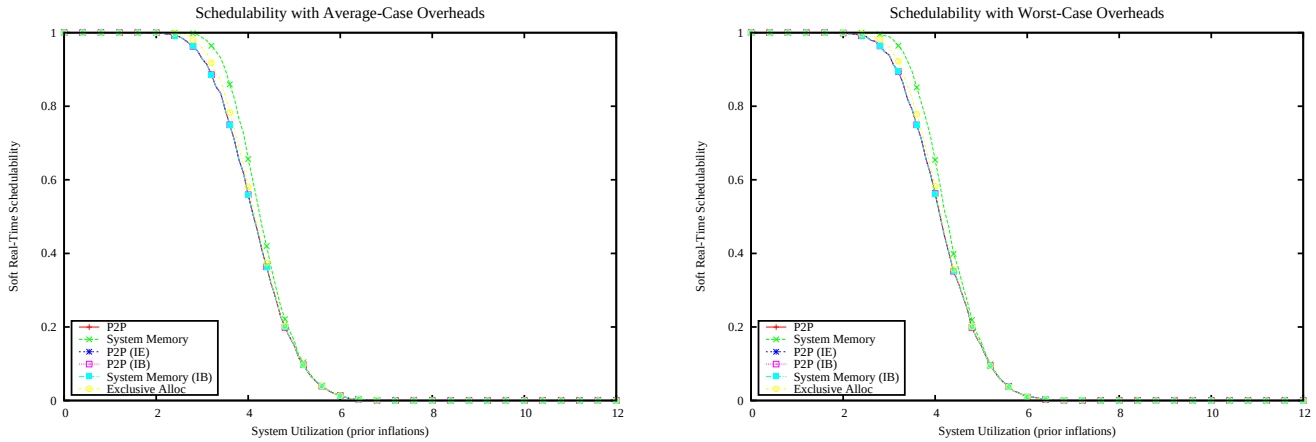

Figure 1064: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

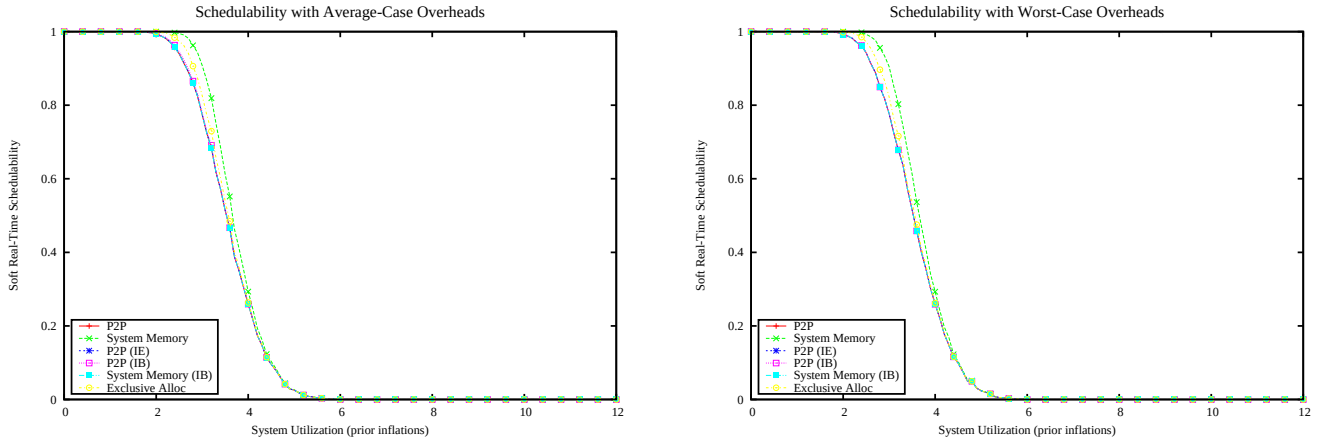

Figure 1065: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

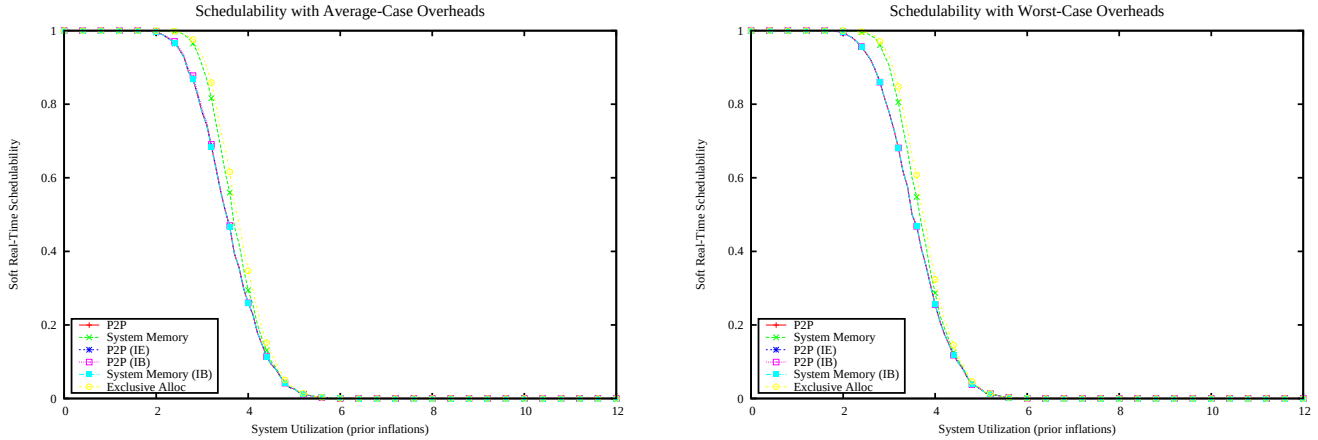

Figure 1066: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

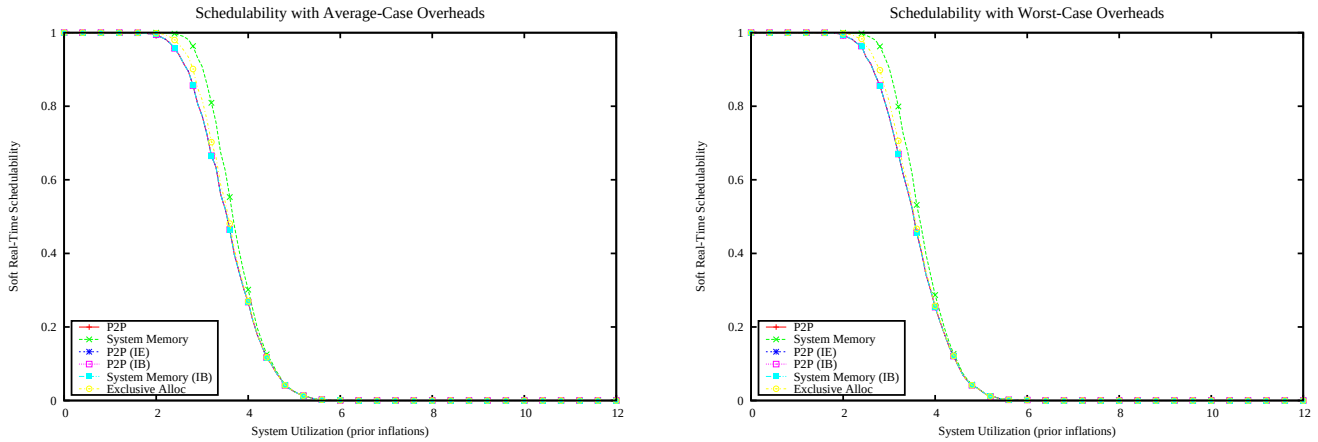

Figure 1067: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

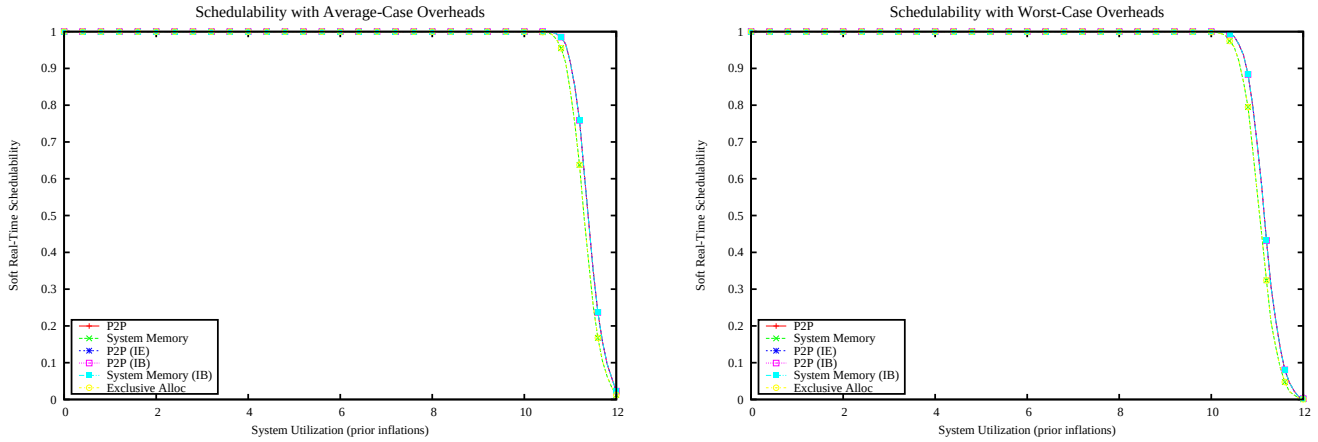

Figure 1068: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

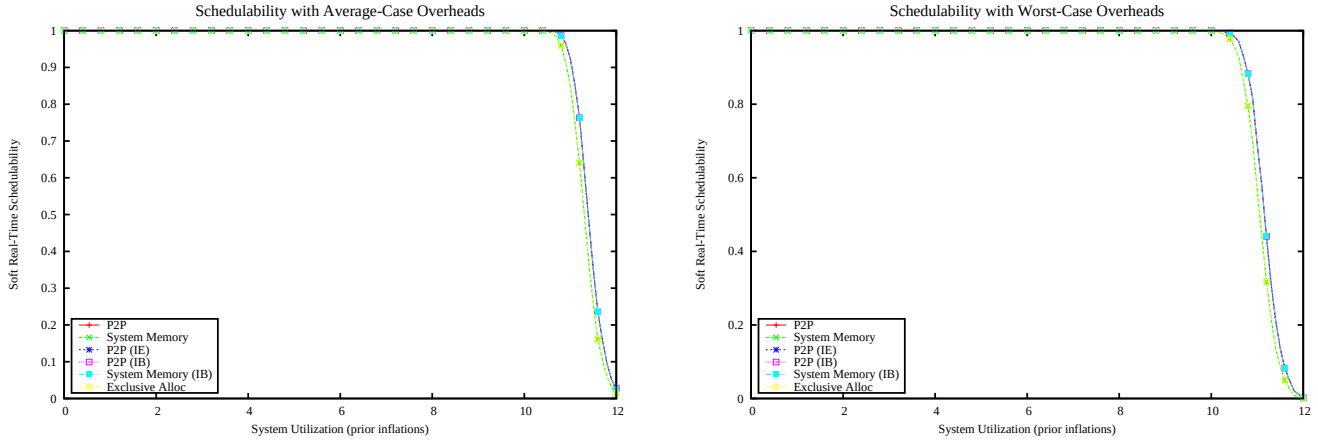

Figure 1069: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

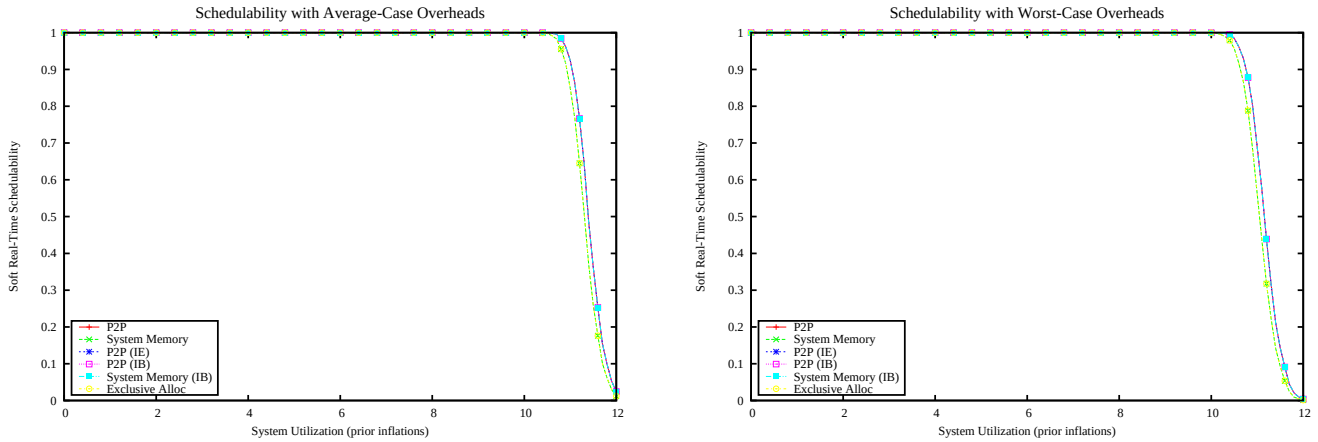

Figure 1070: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

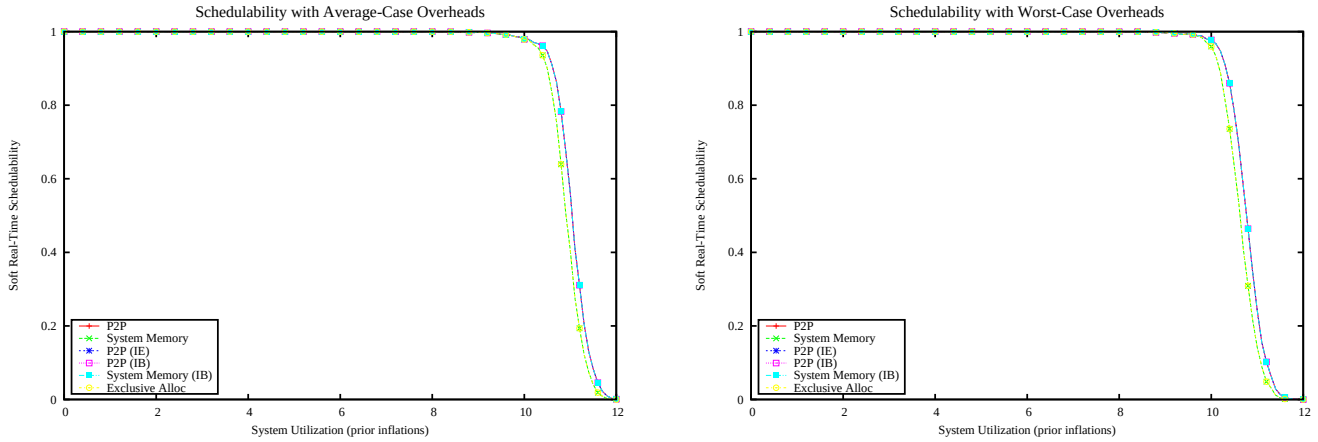

Figure 1071: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

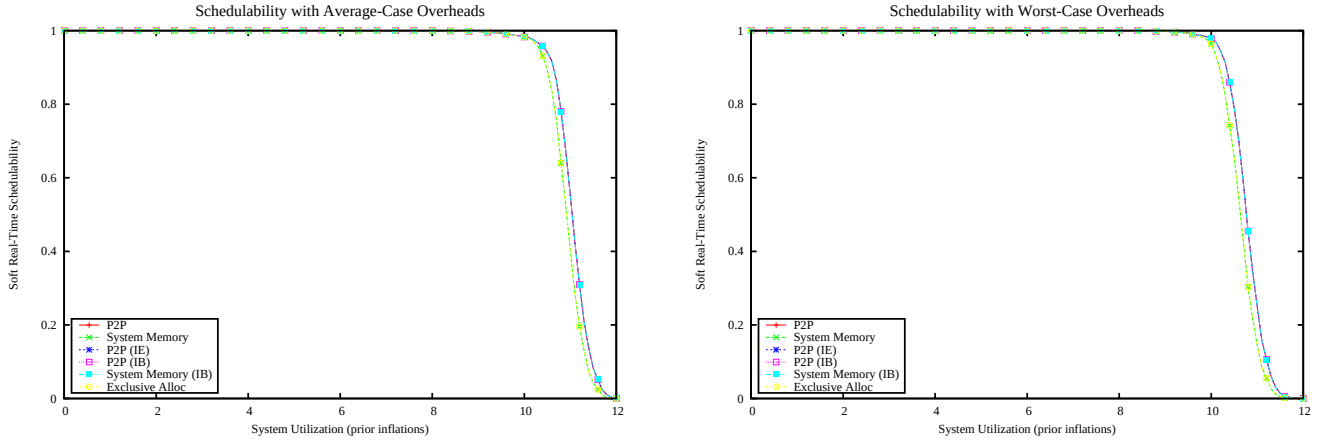

Figure 1072: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

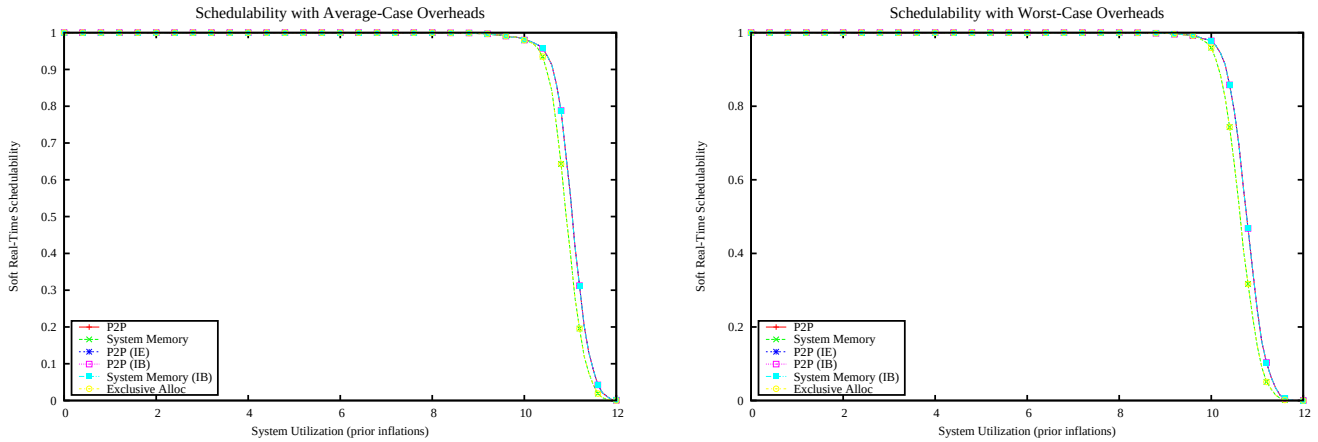

Figure 1073: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

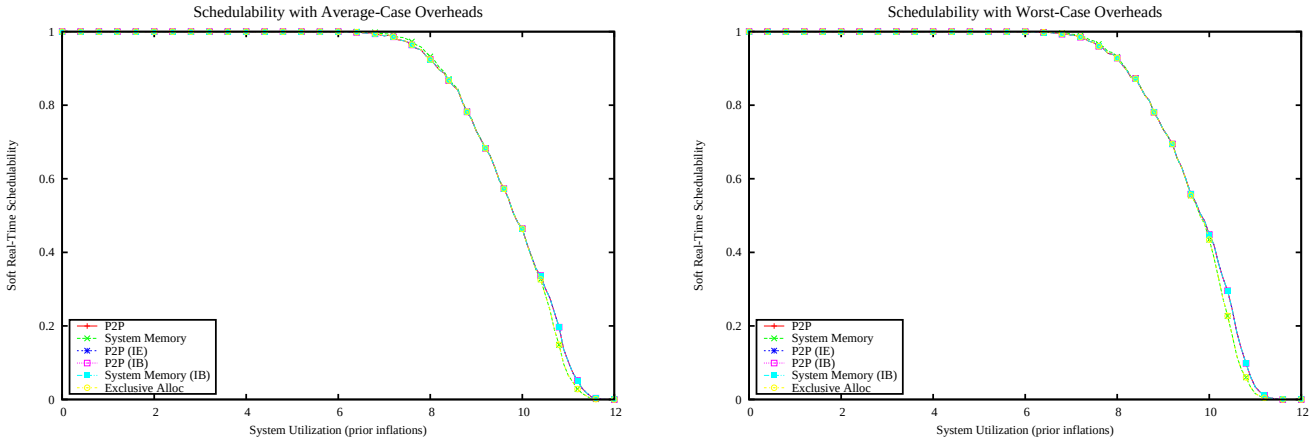

Figure 1074: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

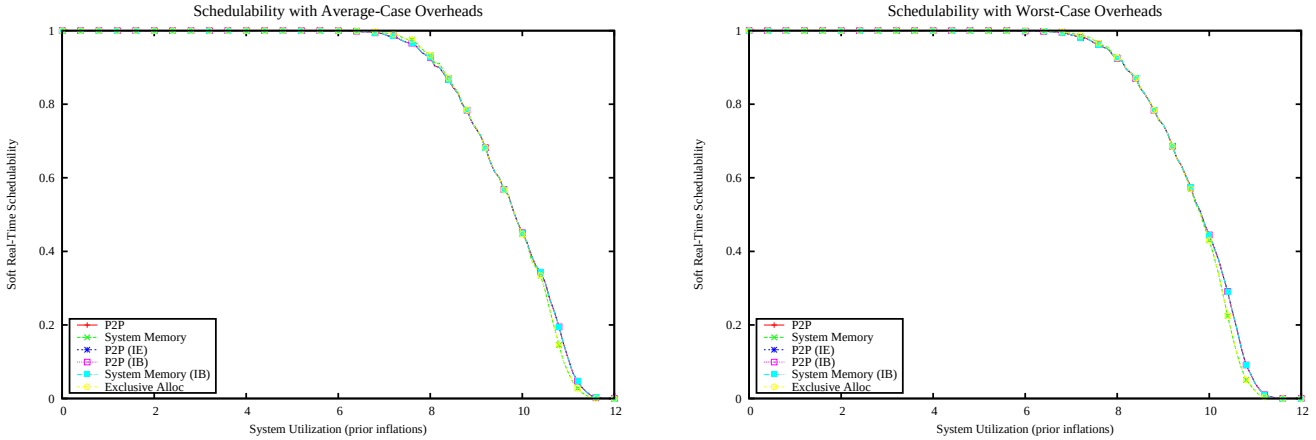

Figure 1075: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

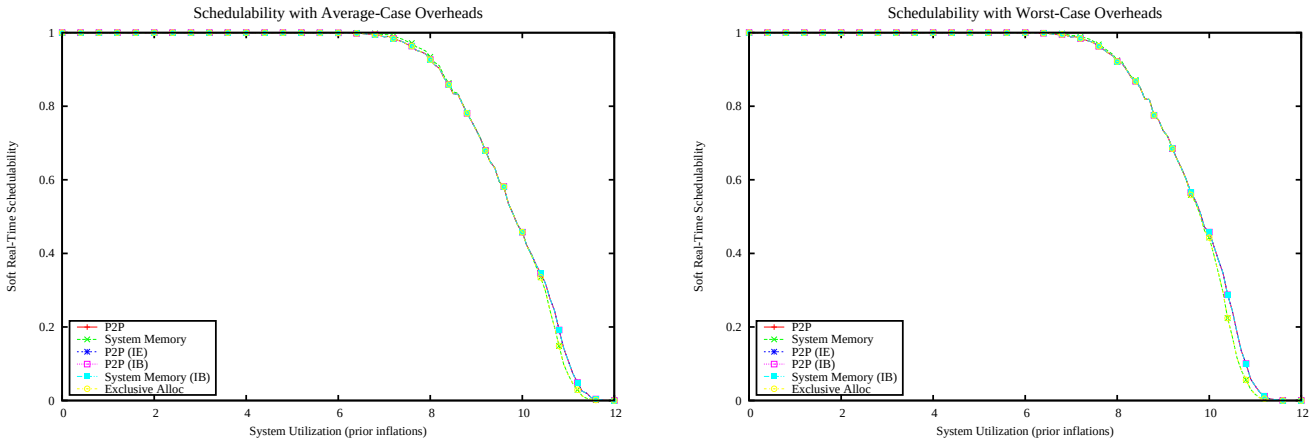

Figure 1076: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

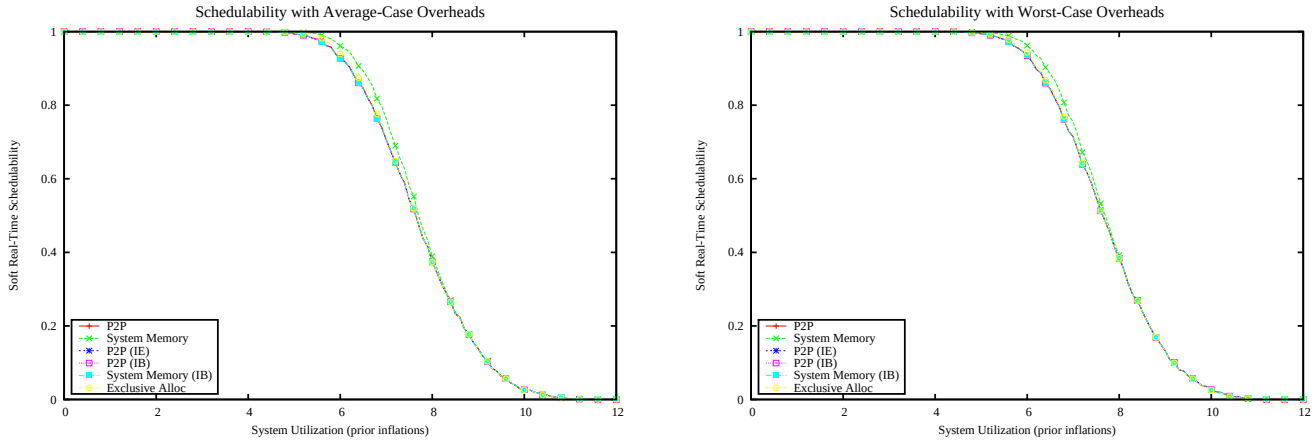

Figure 1077: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

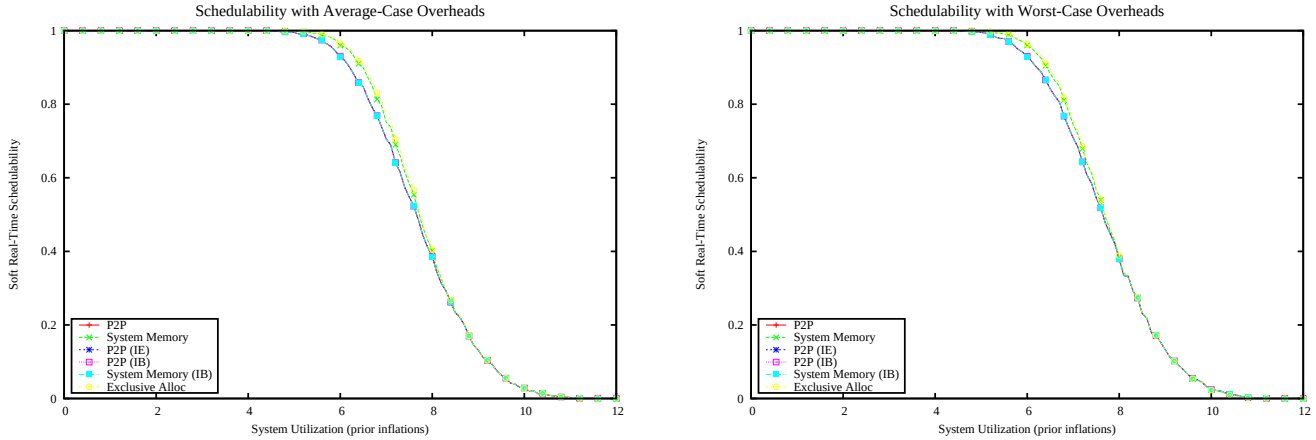

Figure 1078: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

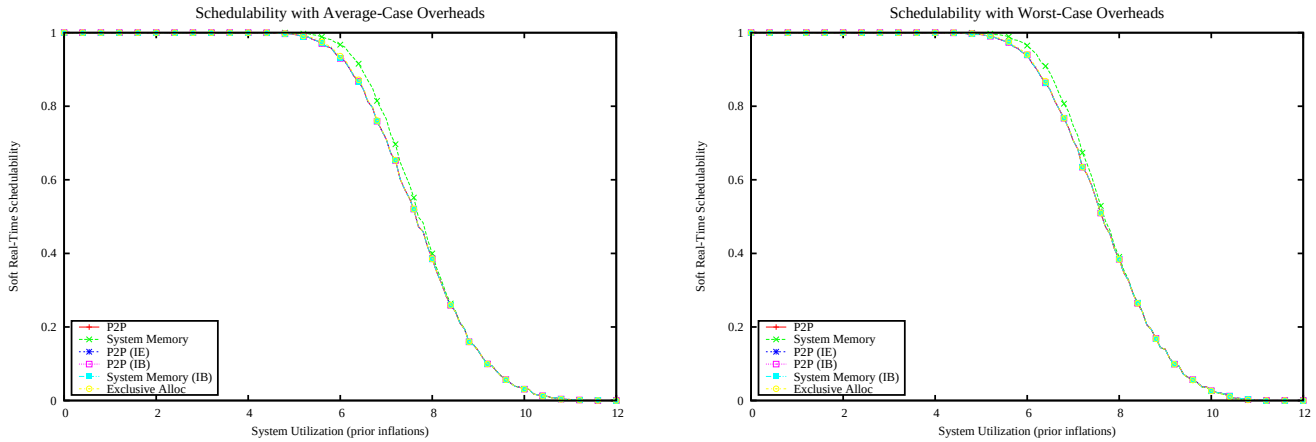

Figure 1079: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

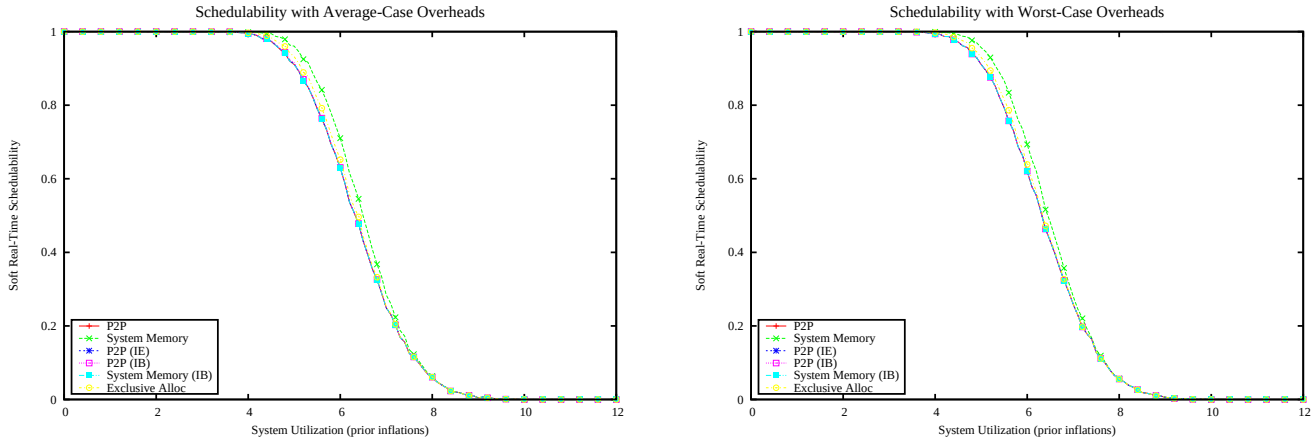

Figure 1080: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

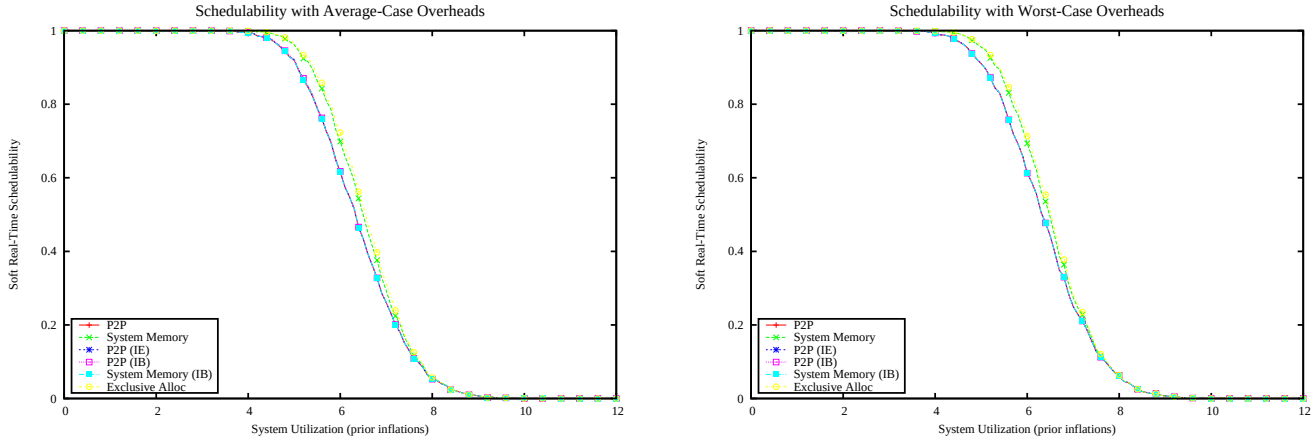

Figure 1081: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

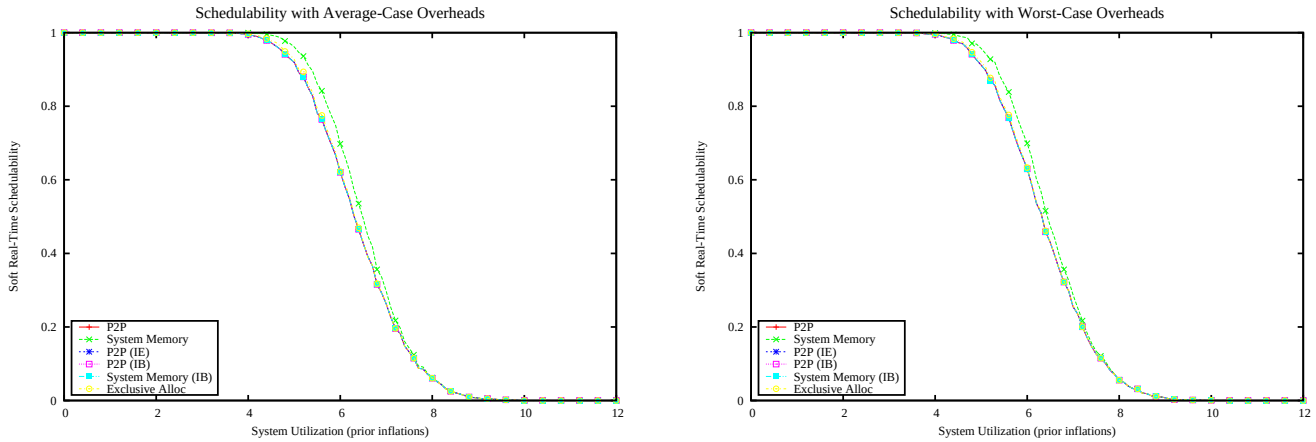

Figure 1082: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

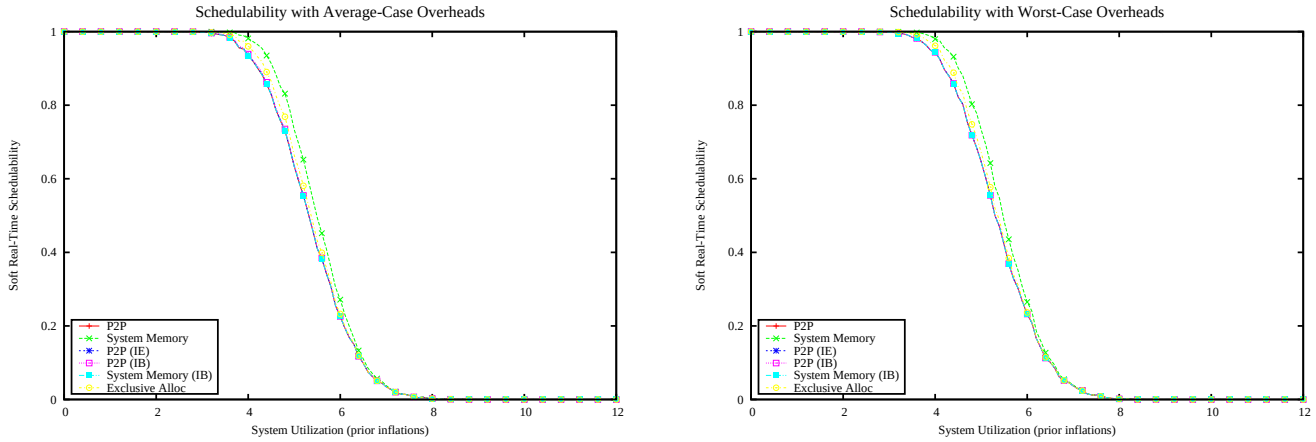

Figure 1083: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

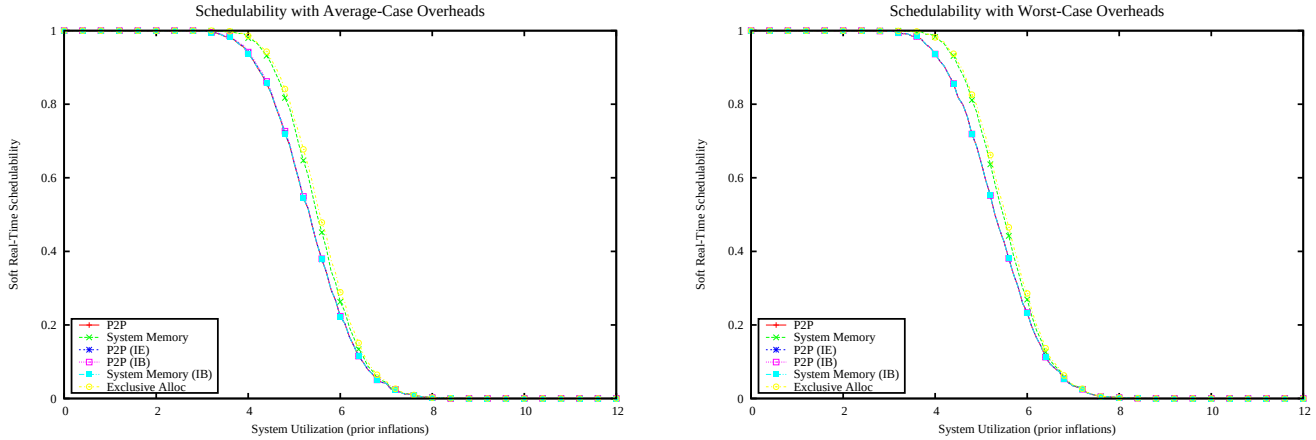

Figure 1084: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

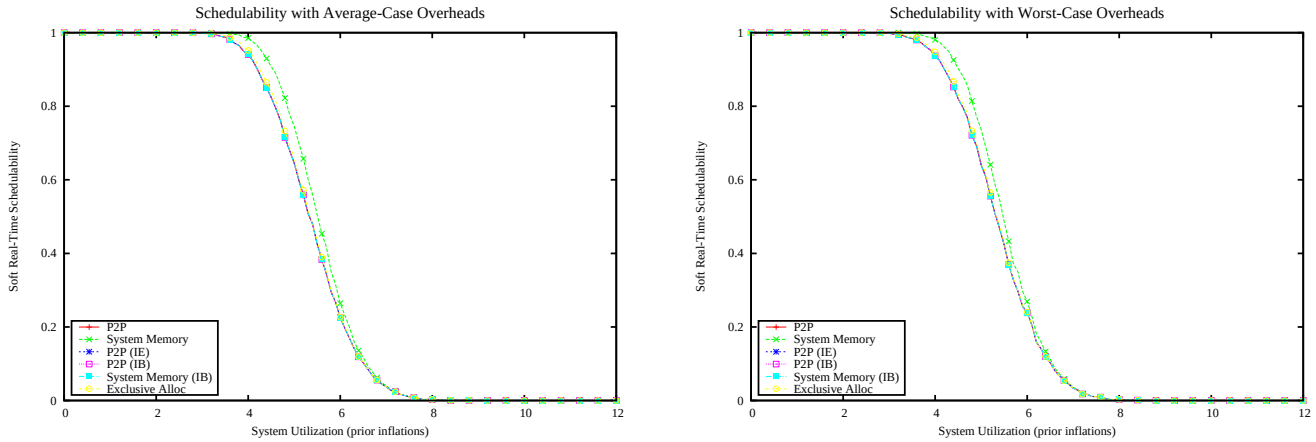

Figure 1085: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

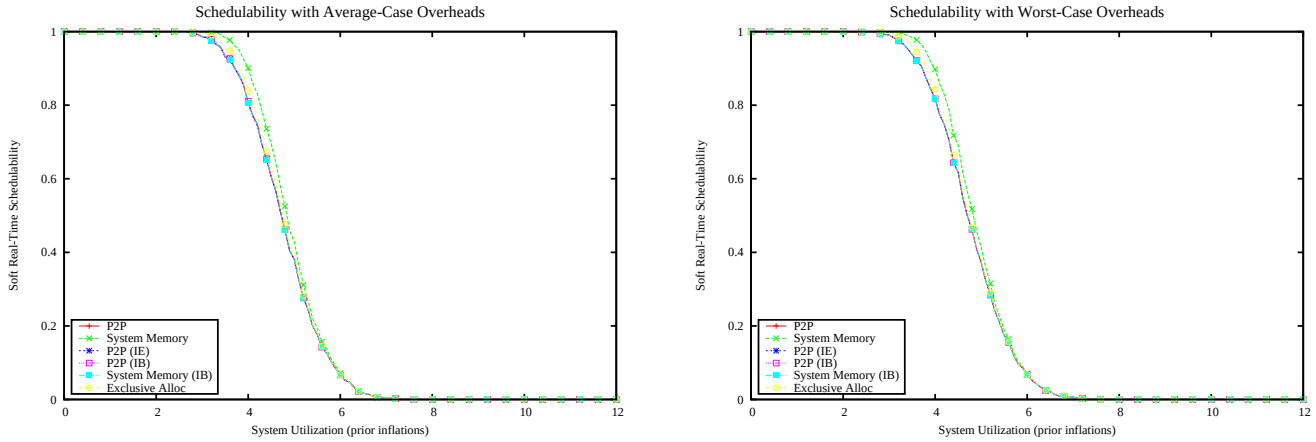

Figure 1086: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

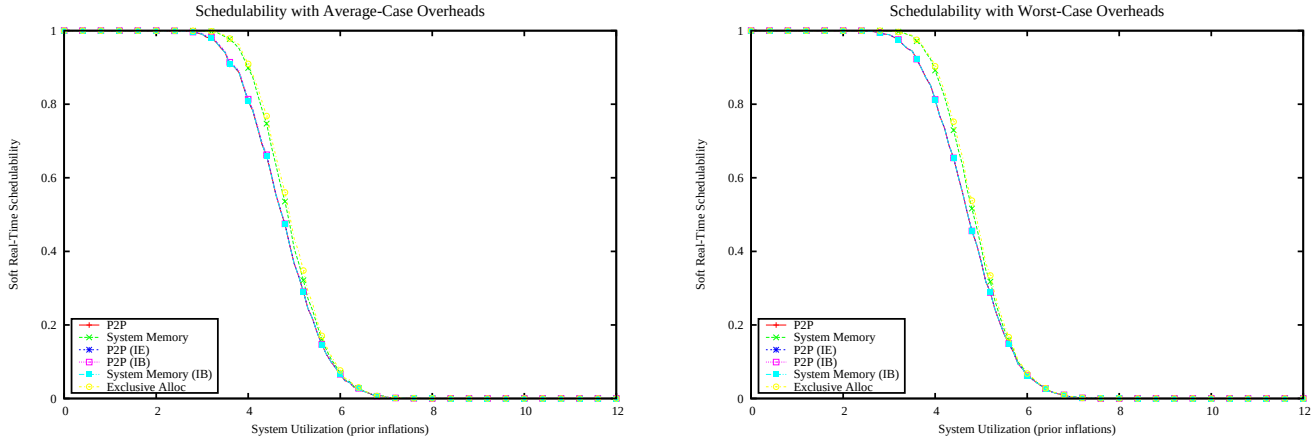

Figure 1087: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

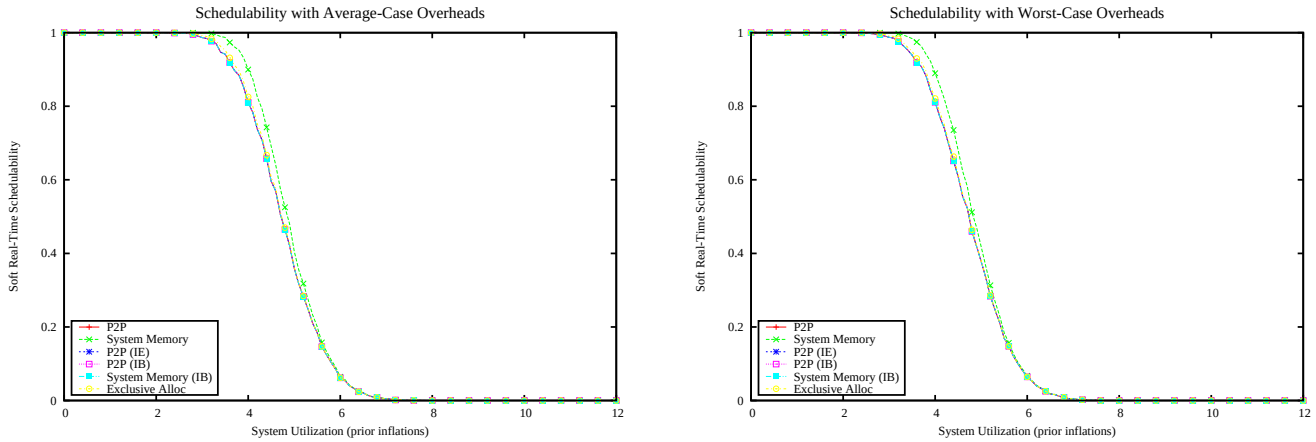

Figure 1088: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

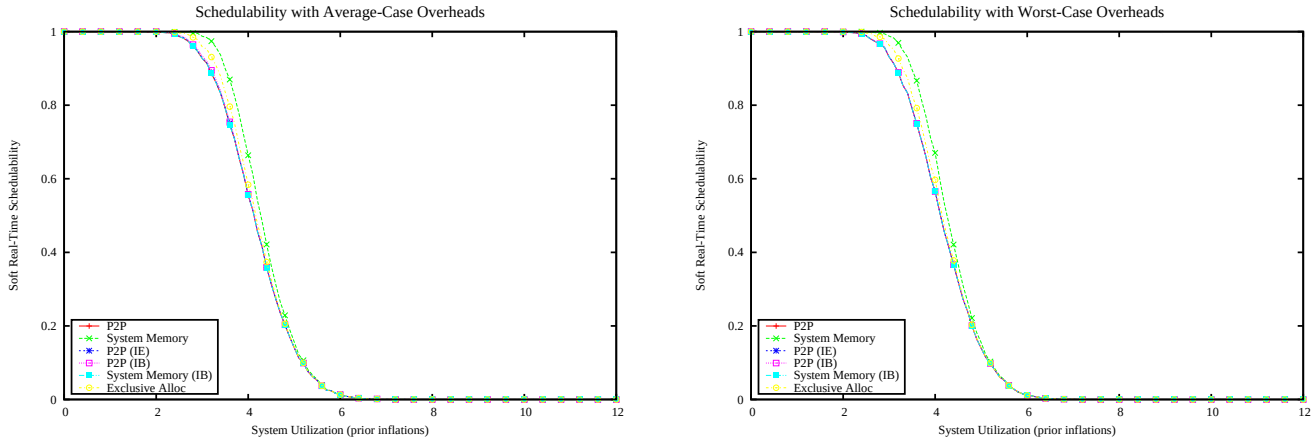

Figure 1089: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

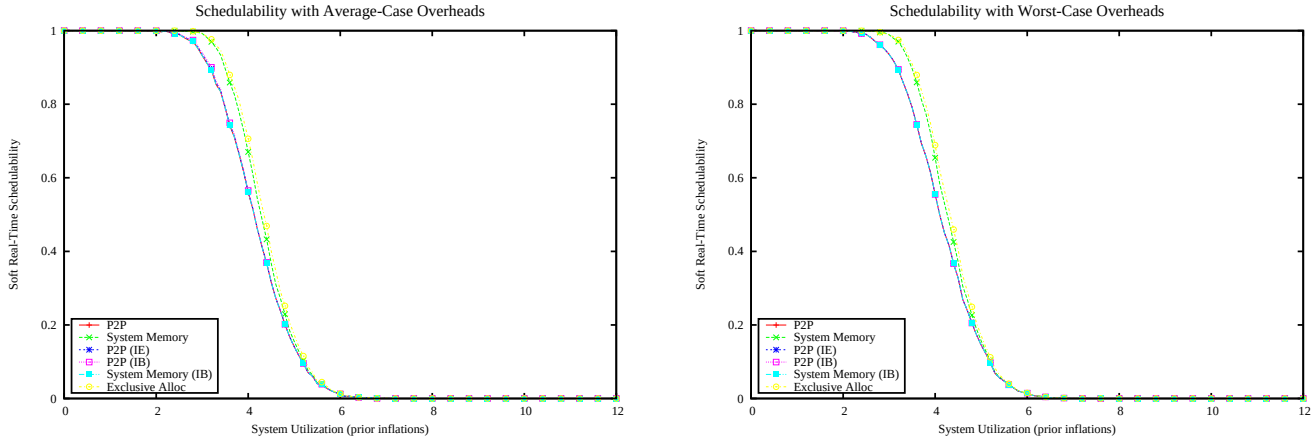

Figure 1090: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

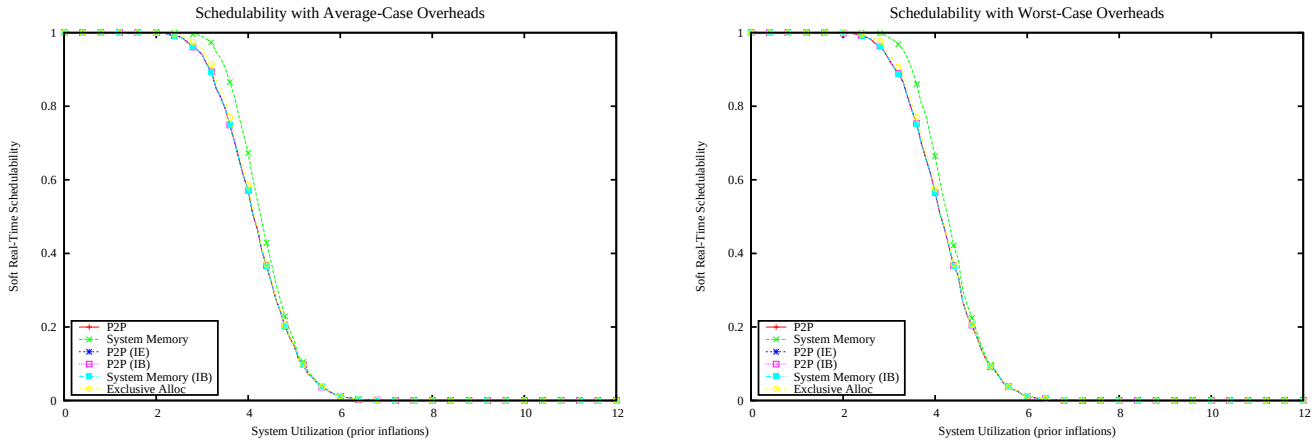

Figure 1091: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

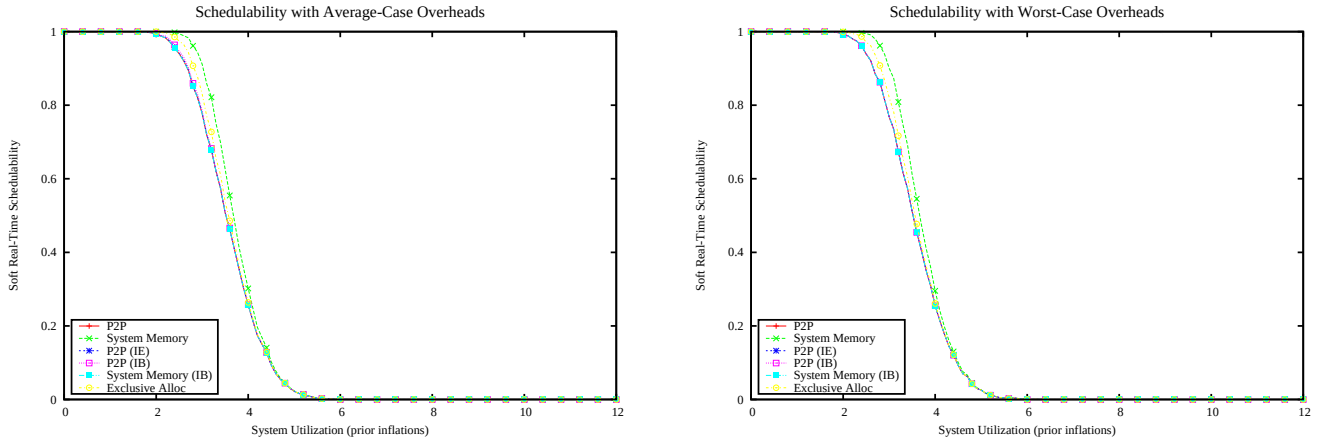

Figure 1092: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

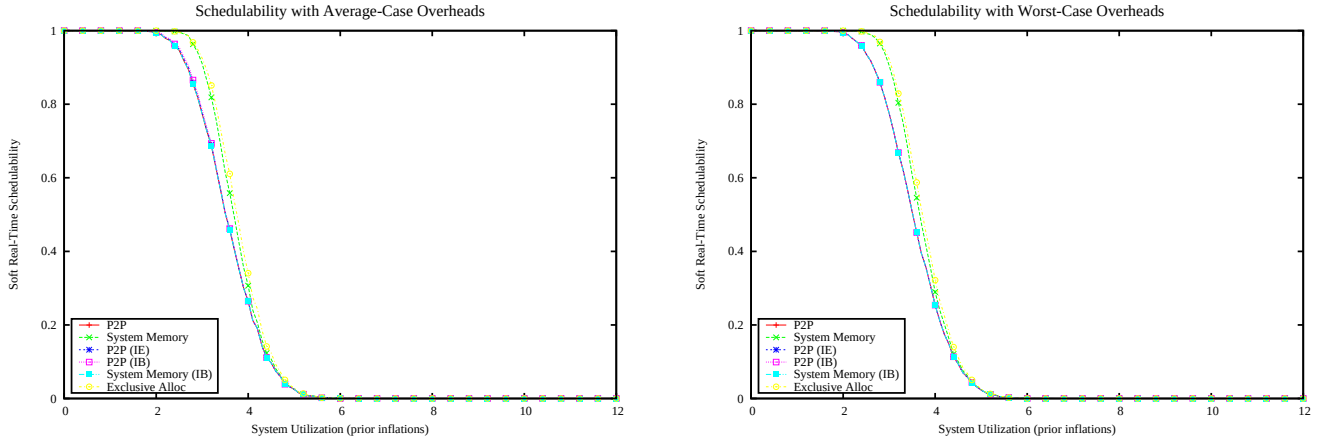

Figure 1093: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

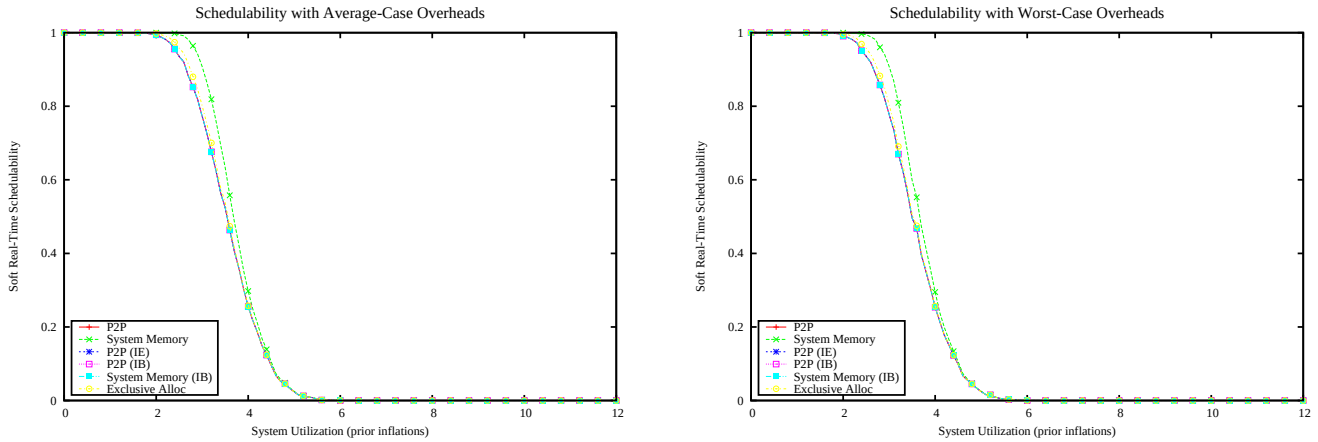

Figure 1094: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

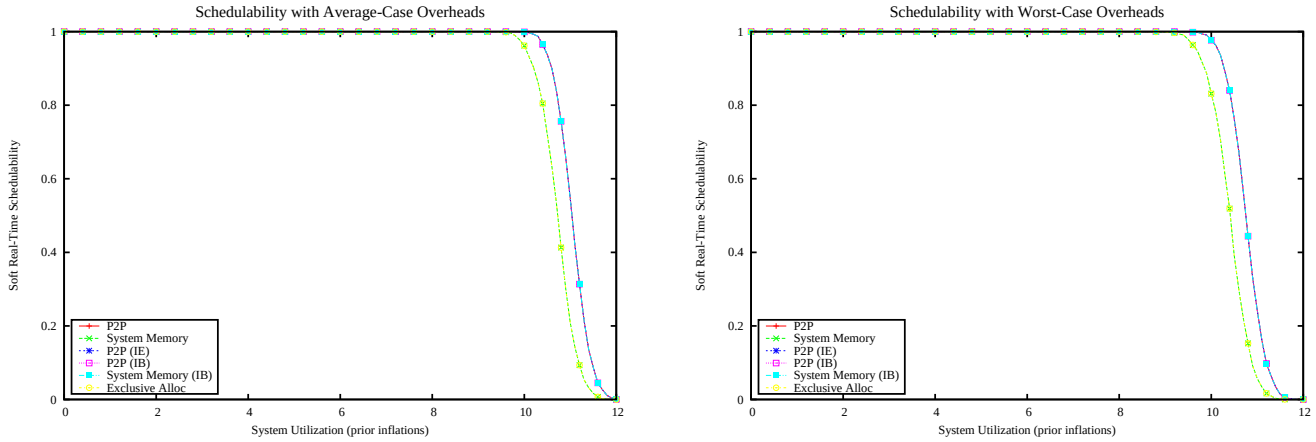

Figure 1095: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

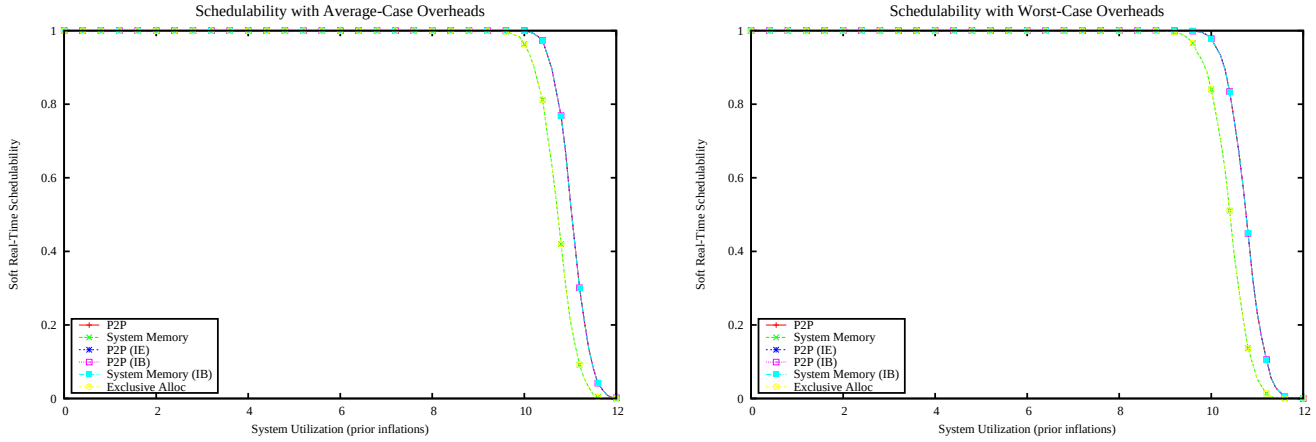

Figure 1096: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

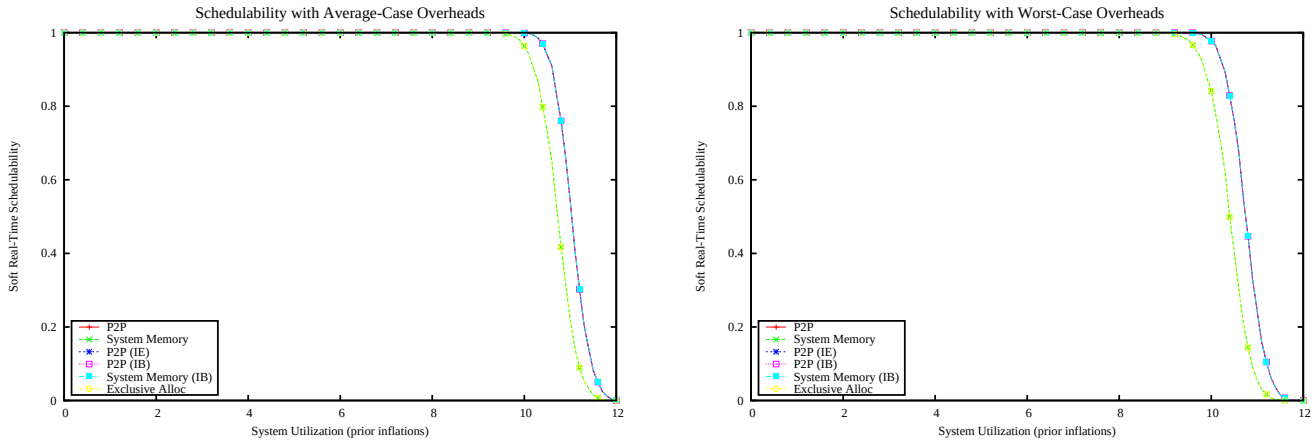

Figure 1097: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

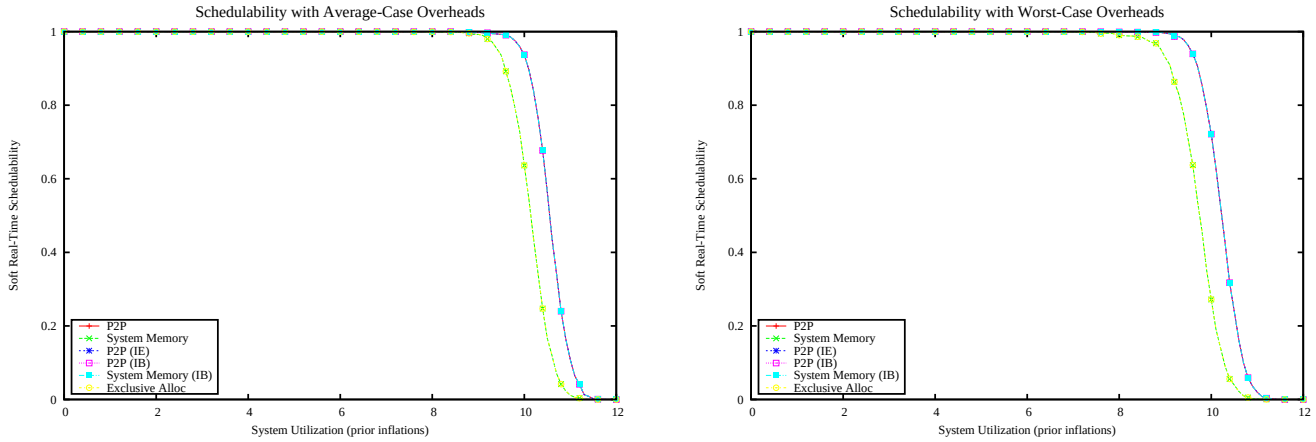

Figure 1098: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

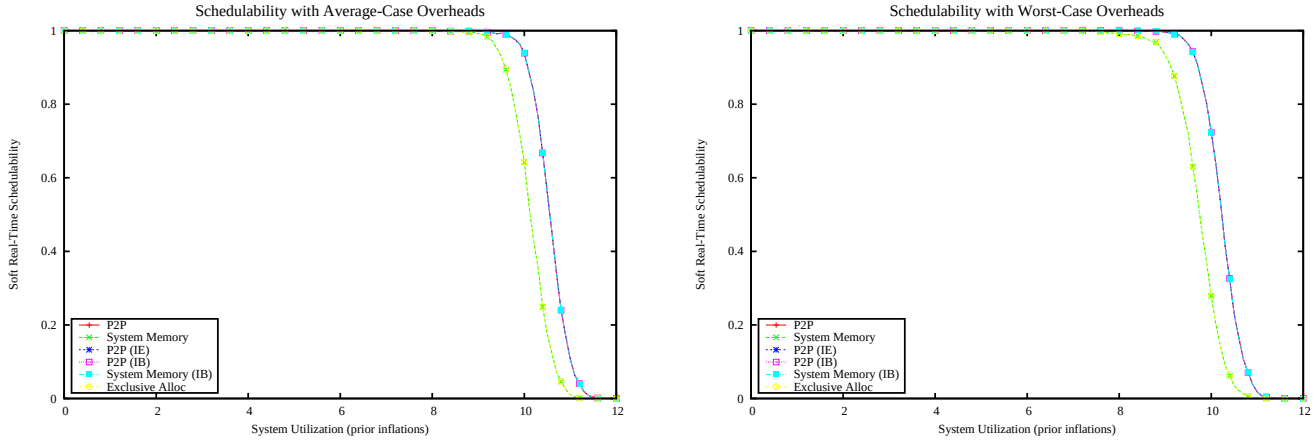

Figure 1099: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

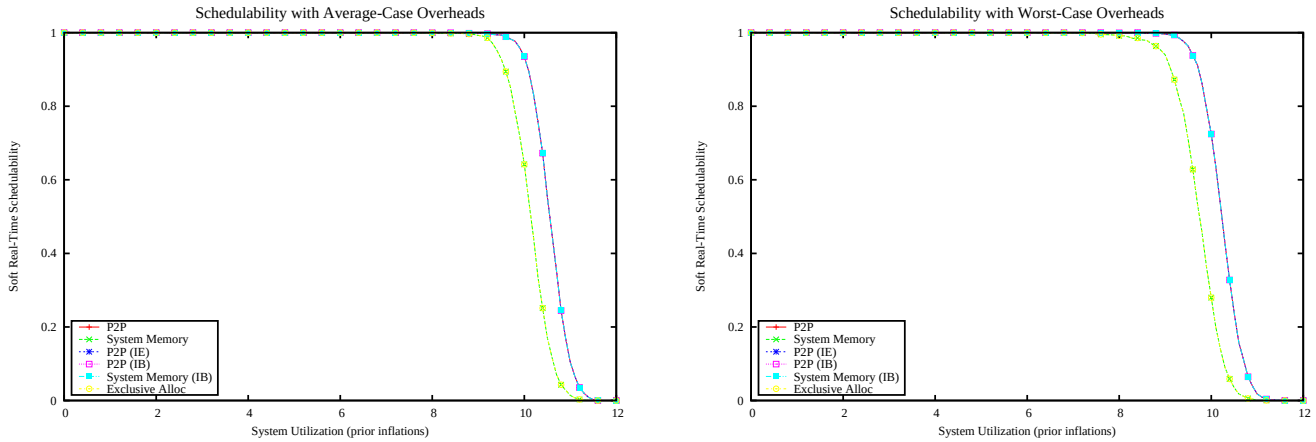

Figure 1100: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

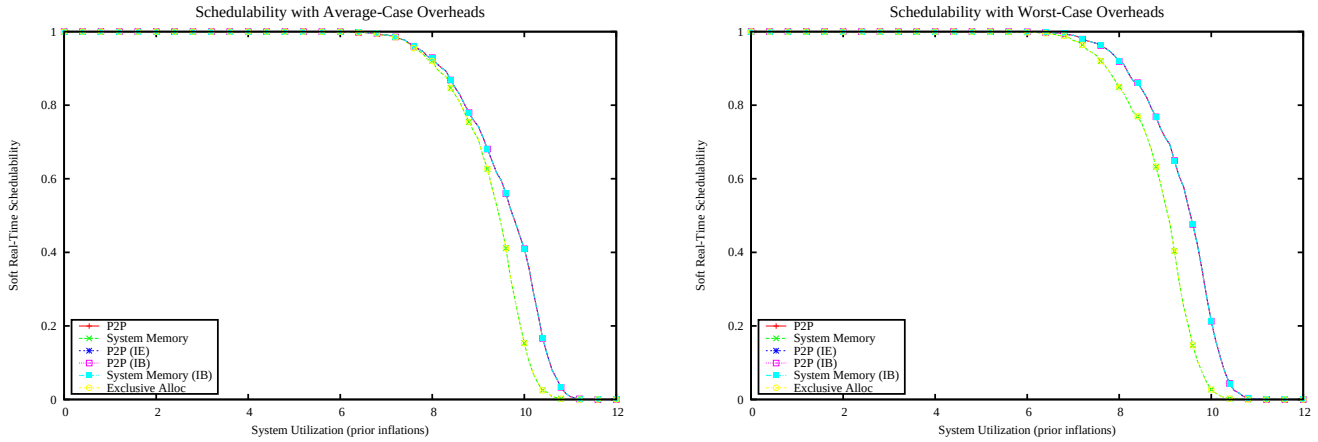

Figure 1101: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

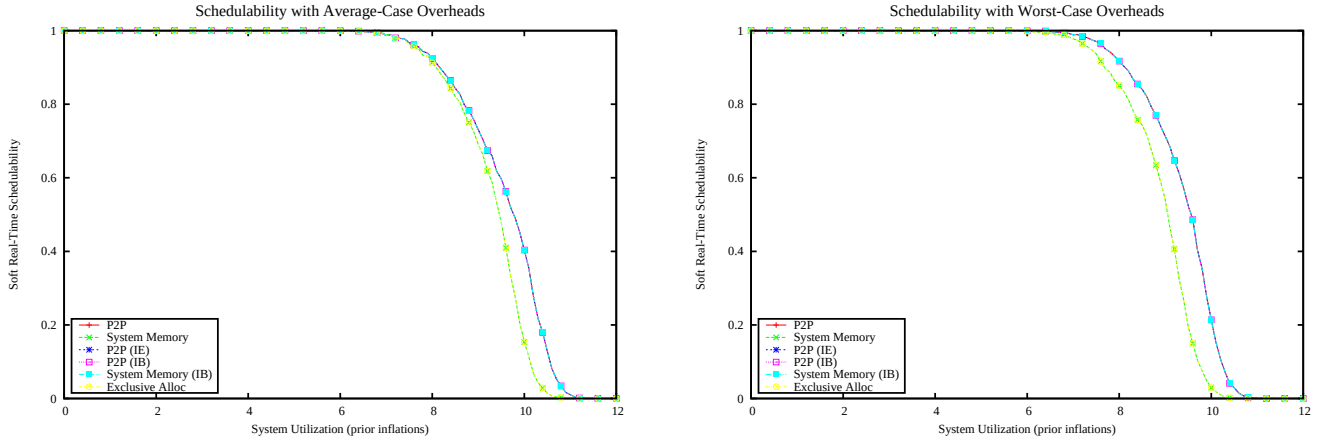

Figure 1102: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

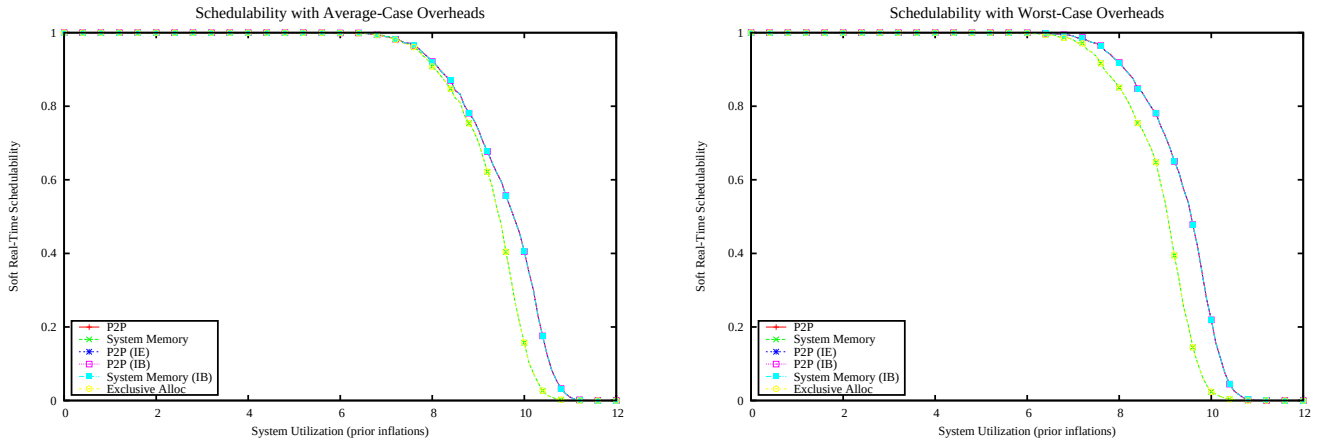

Figure 1103: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

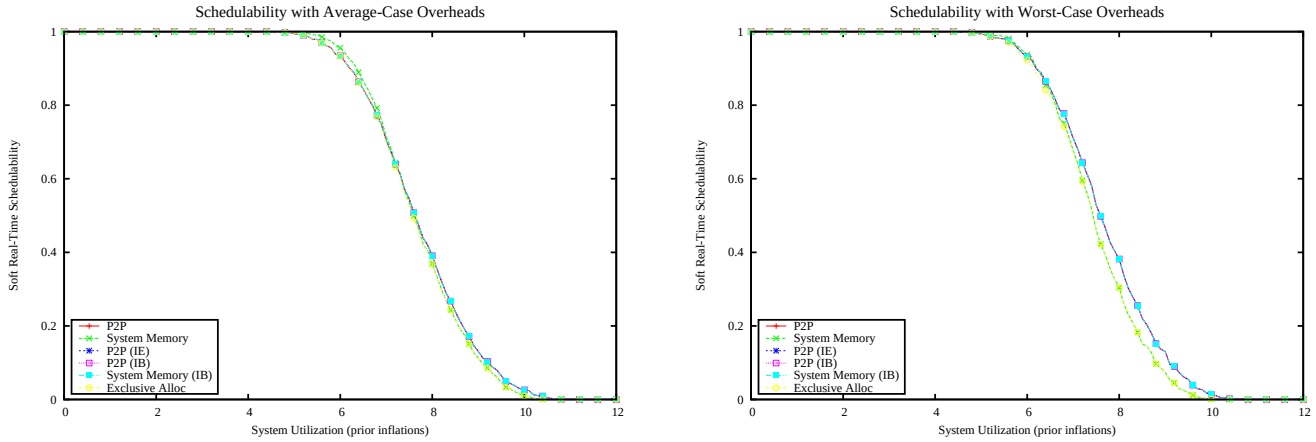

Figure 1104: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

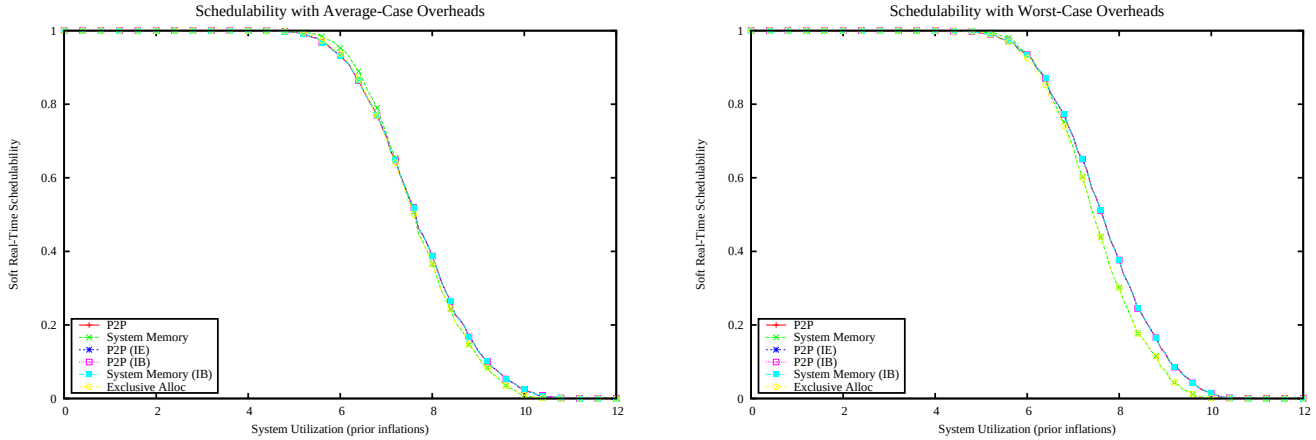

Figure 1105: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

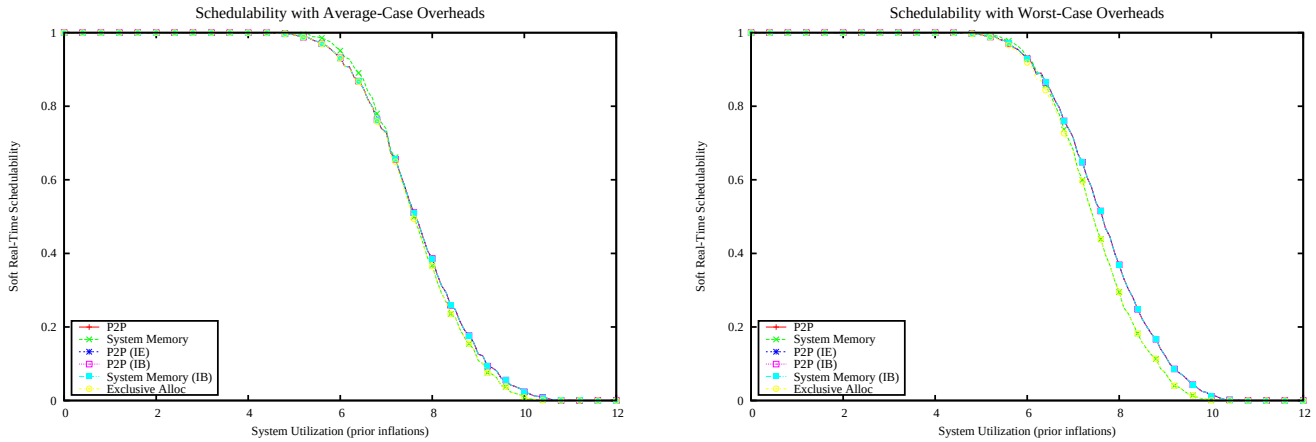

Figure 1106: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

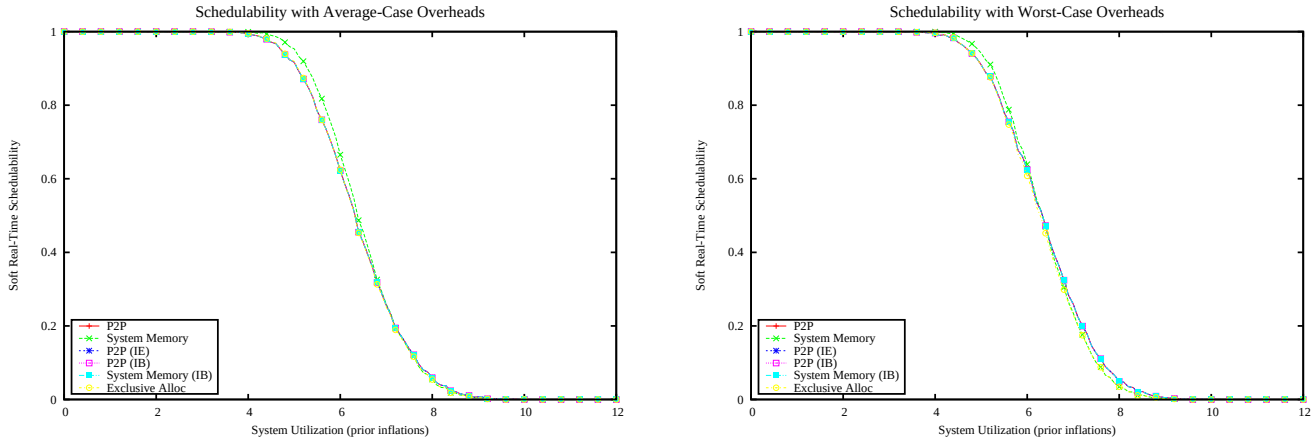

Figure 1107: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

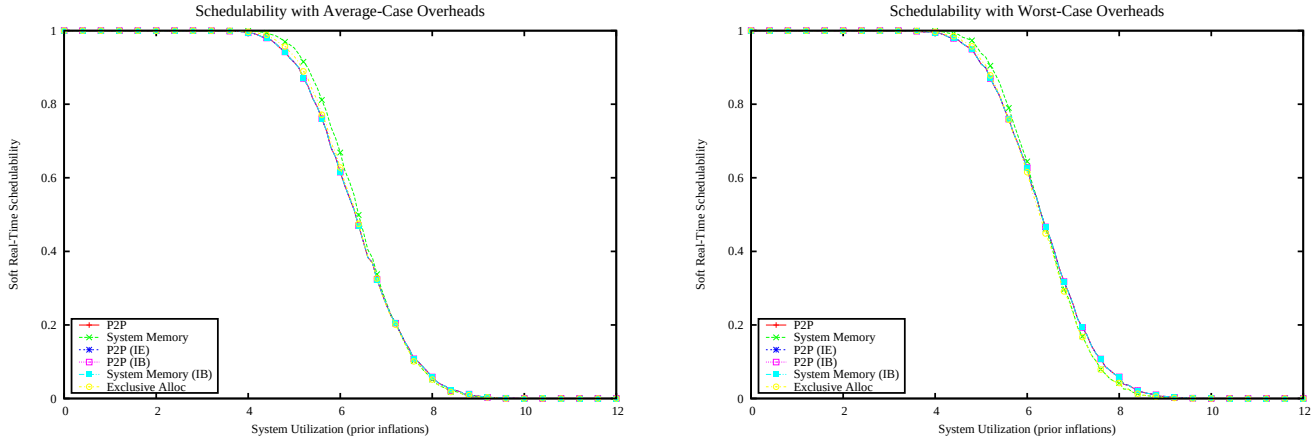

Figure 1108: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

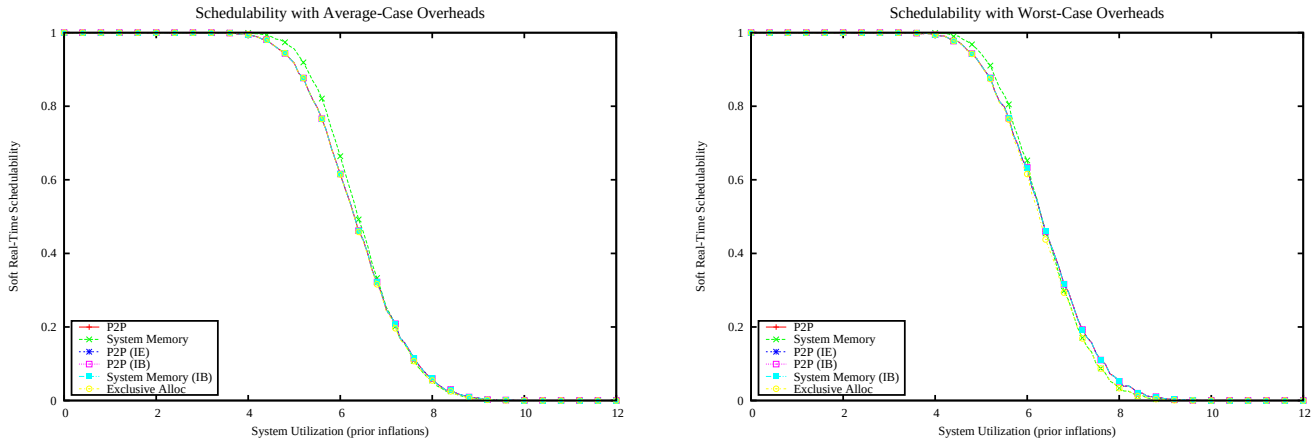

Figure 1109: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

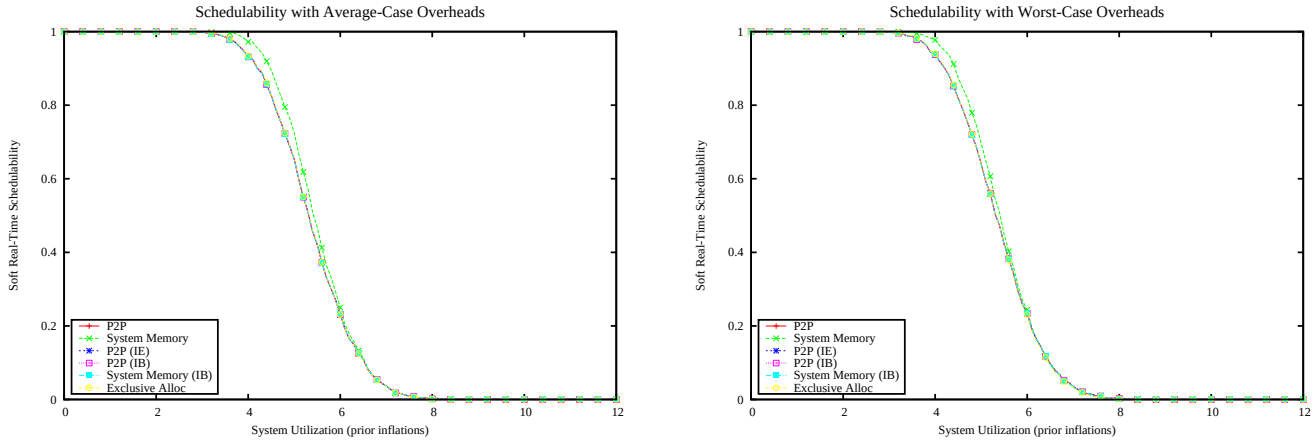

Figure 1110: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

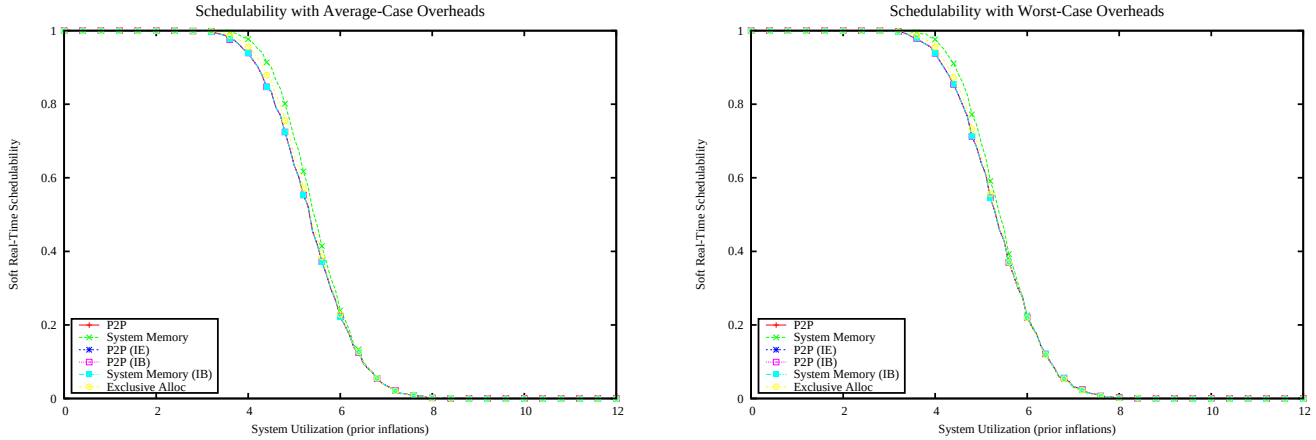

Figure 1111: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

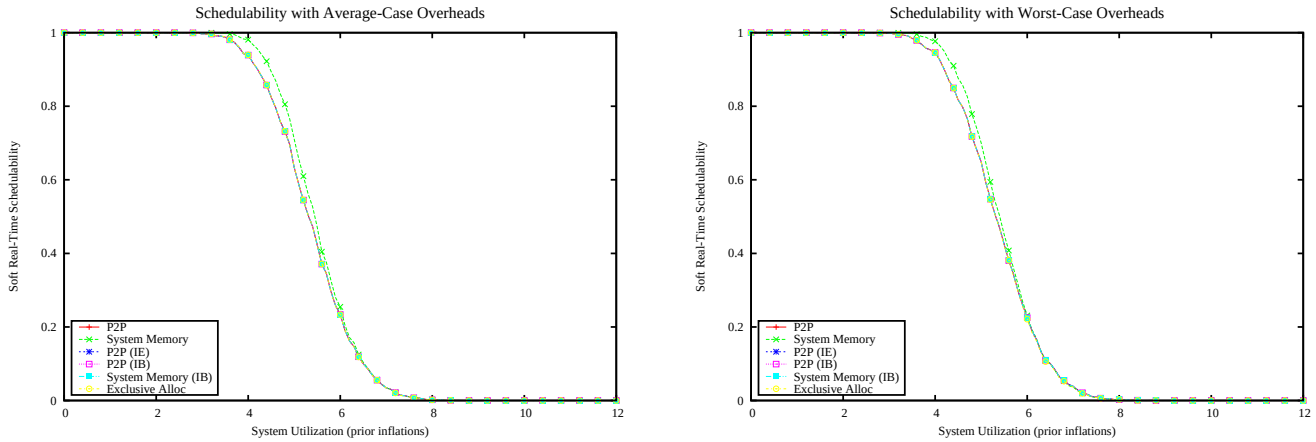

Figure 1112: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

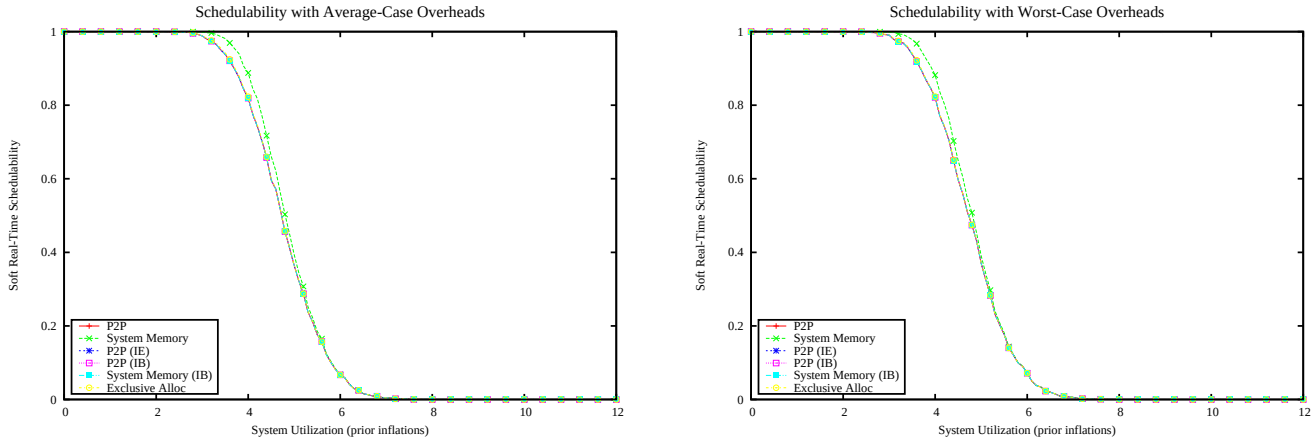

Figure 1113: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

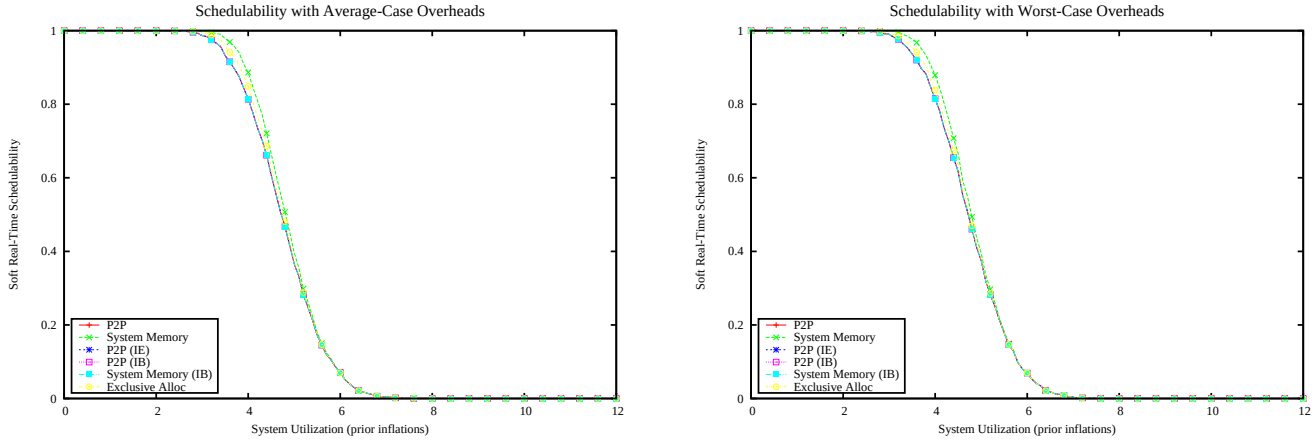

Figure 1114: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

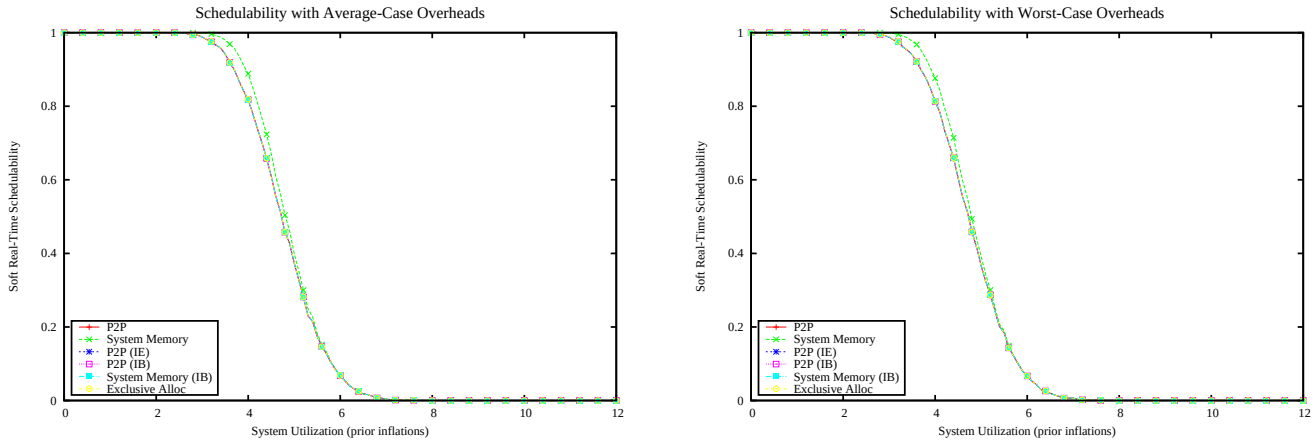

Figure 1115: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

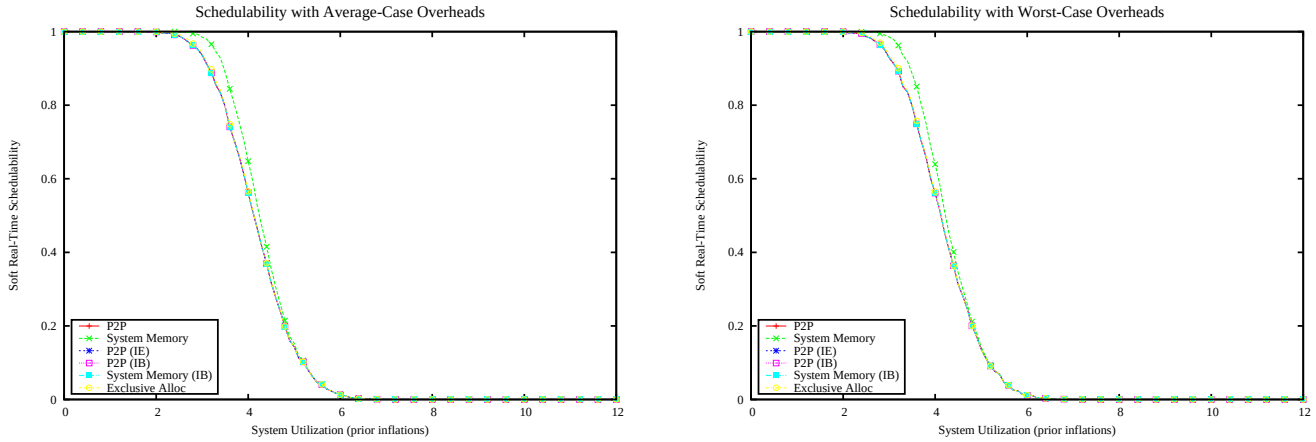

Figure 1116: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

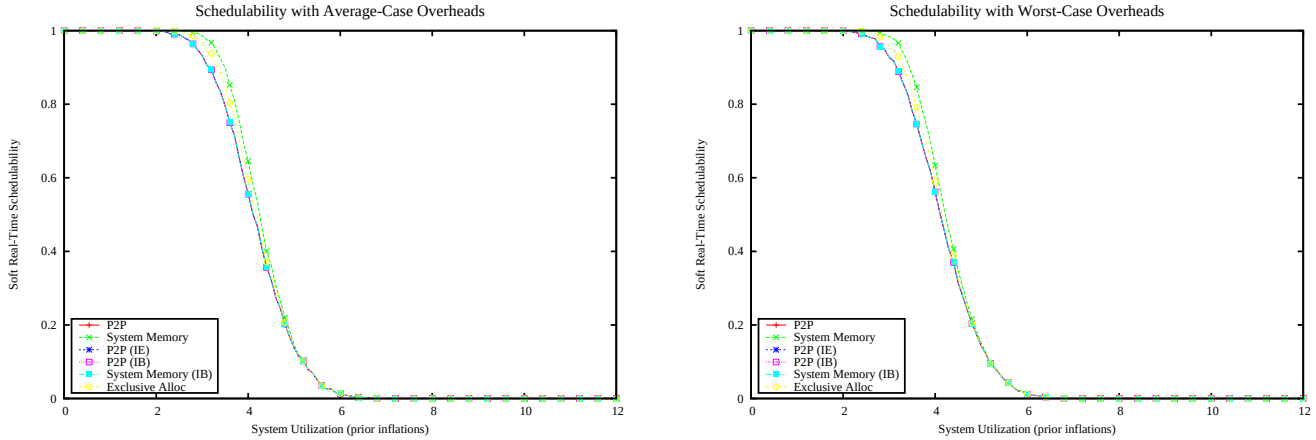

Figure 1117: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

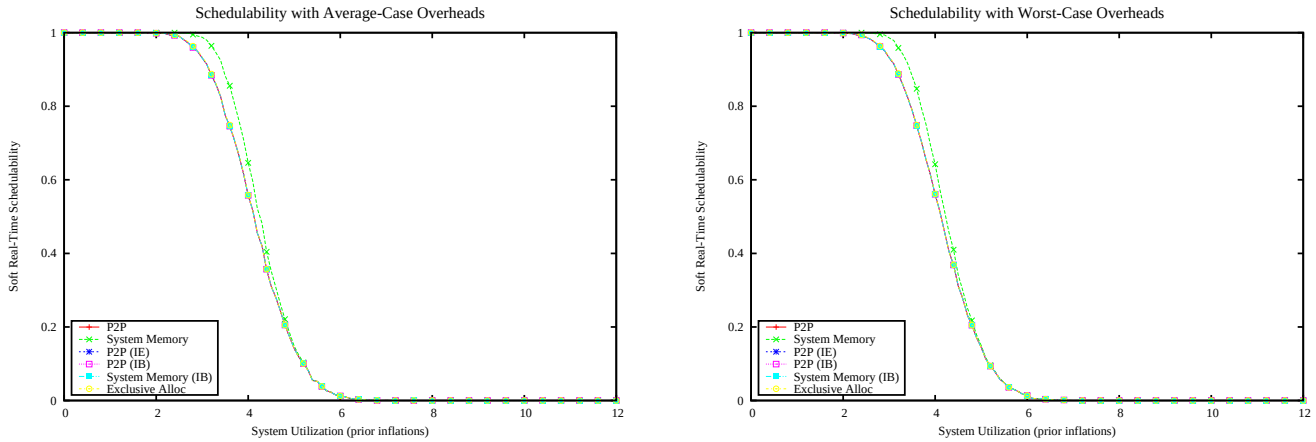

Figure 1118: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

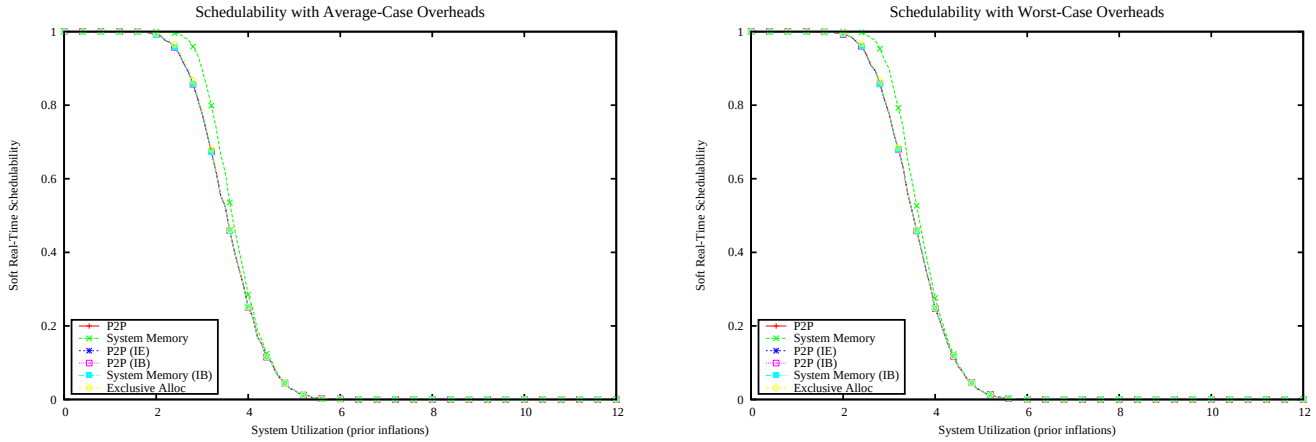

Figure 1119: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

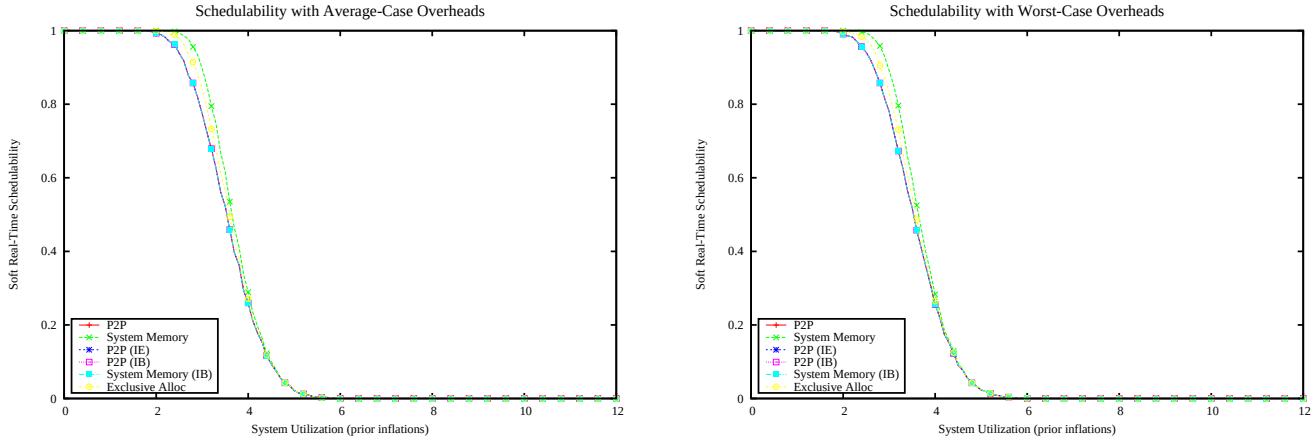

Figure 1120: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

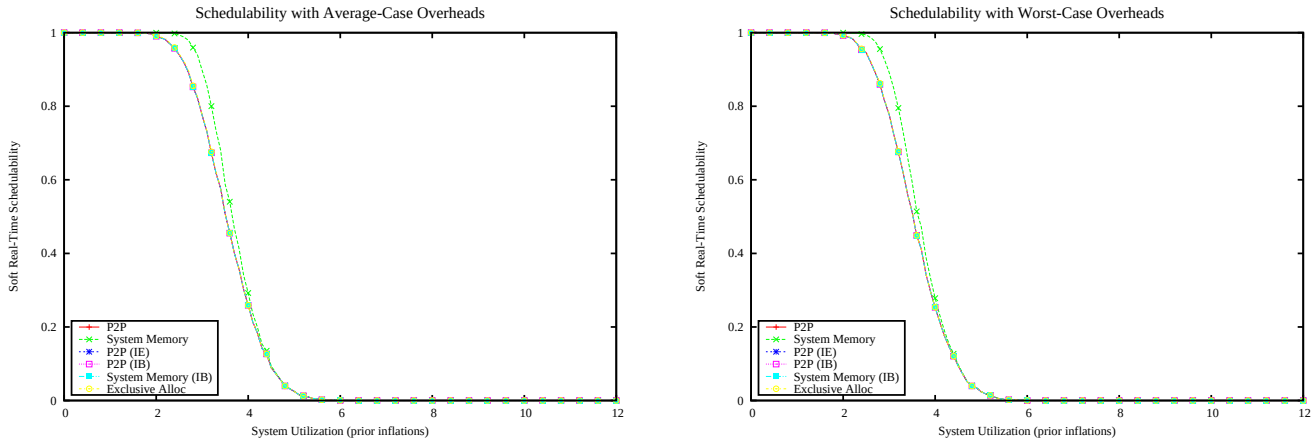

Figure 1121: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

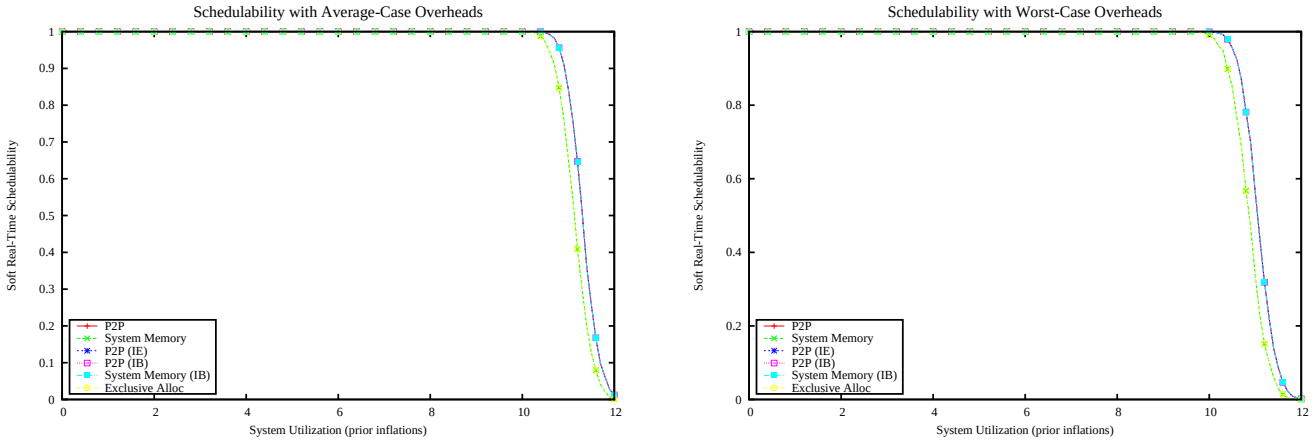

Figure 1122: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

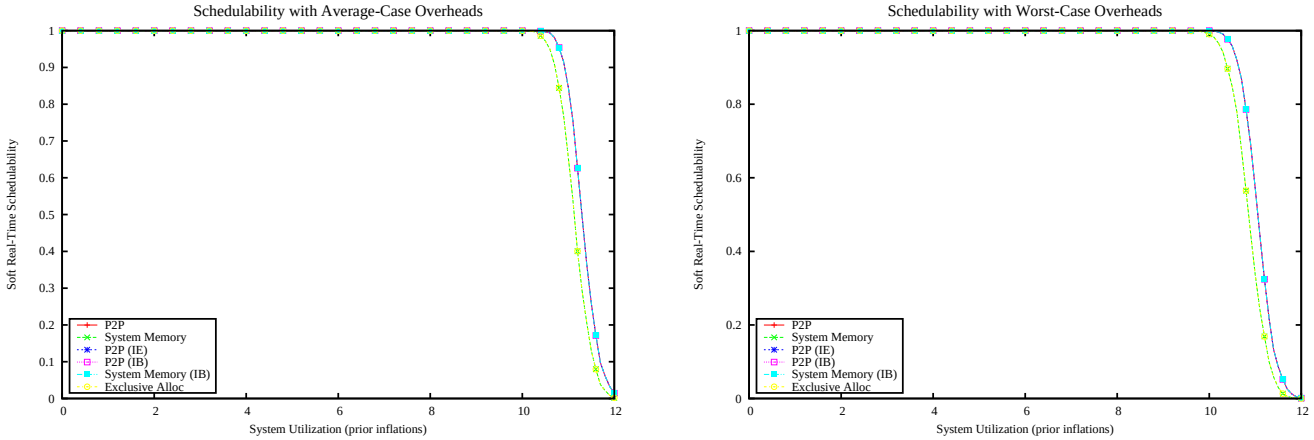

Figure 1123: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

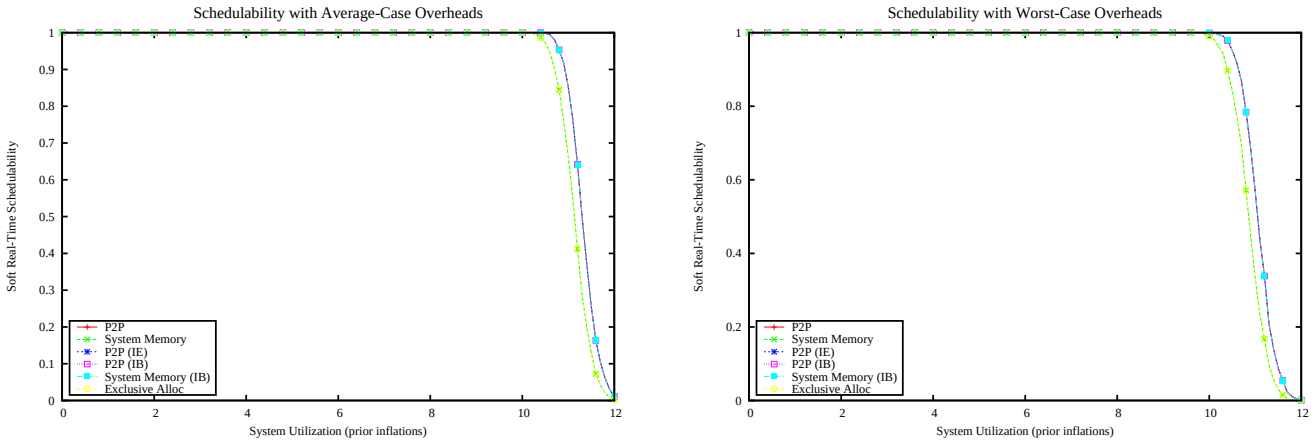

Figure 1124: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

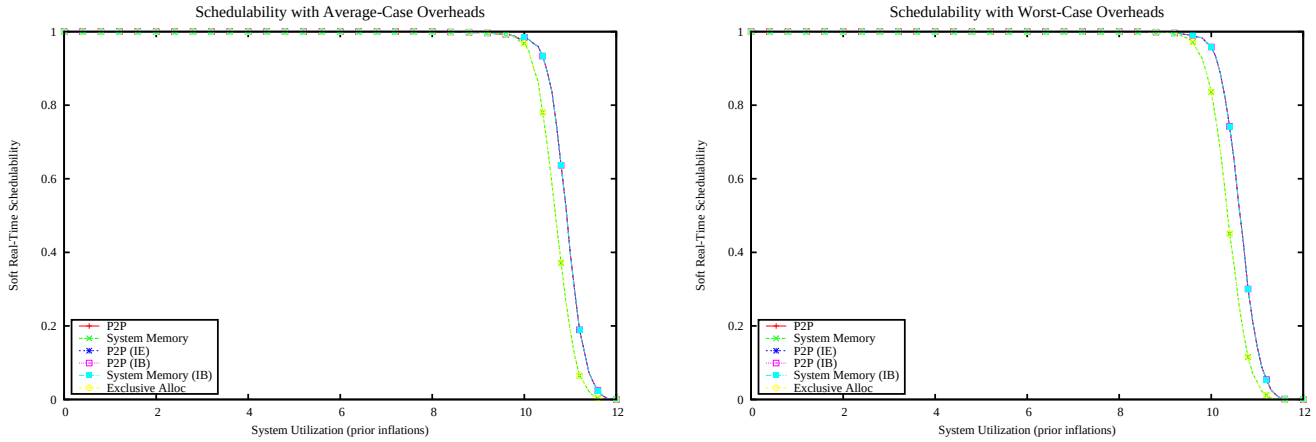

Figure 1125: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

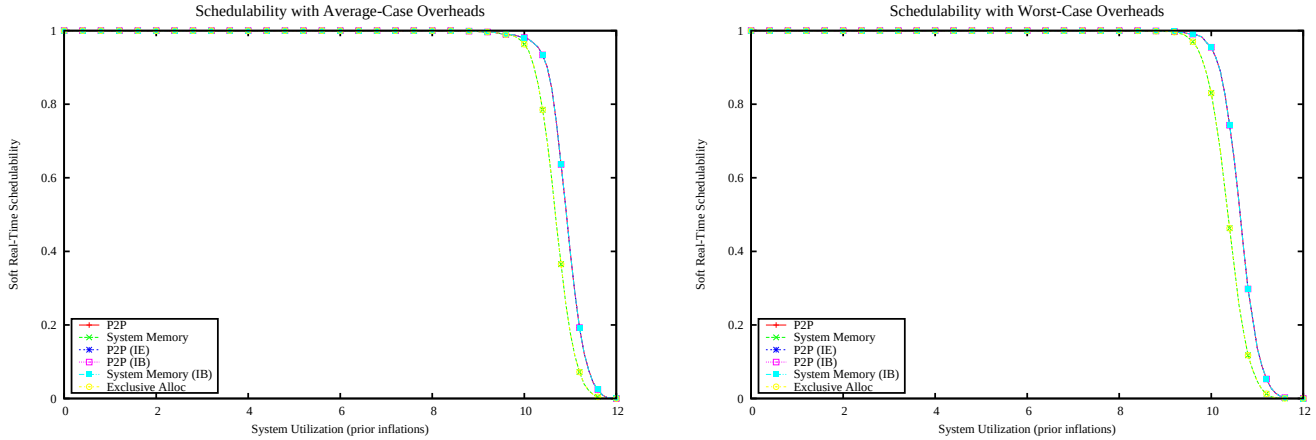

Figure 1126: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

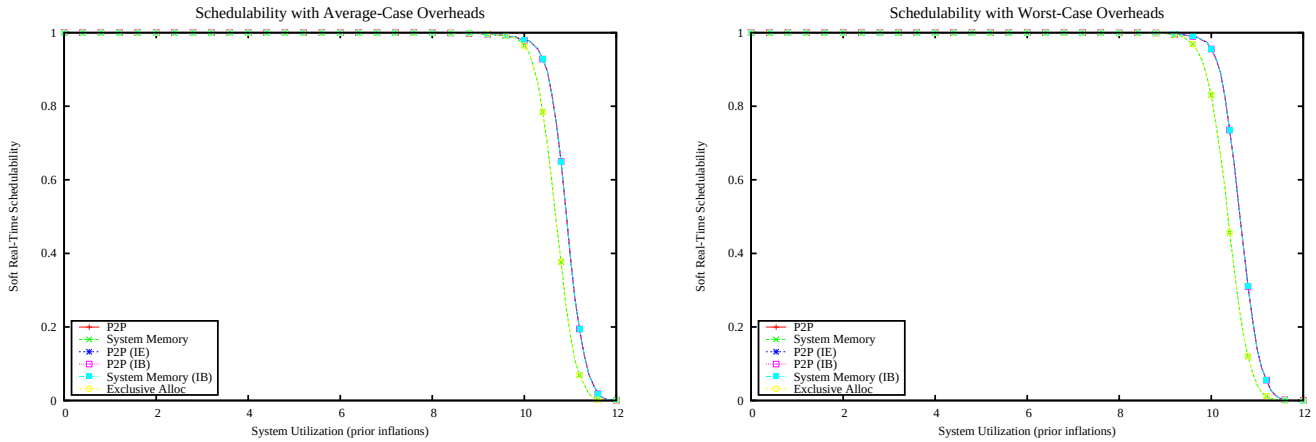

Figure 1127: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

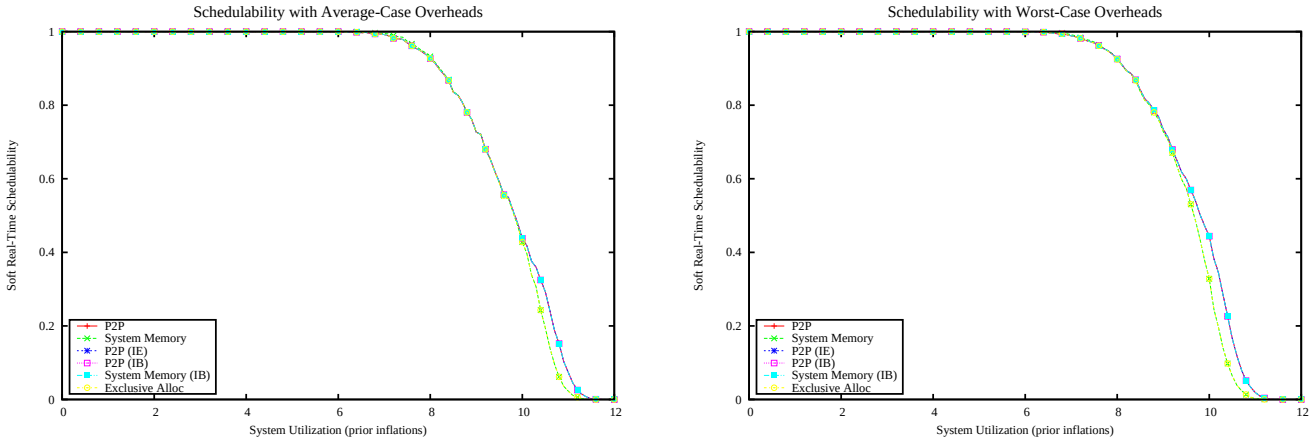

Figure 1128: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

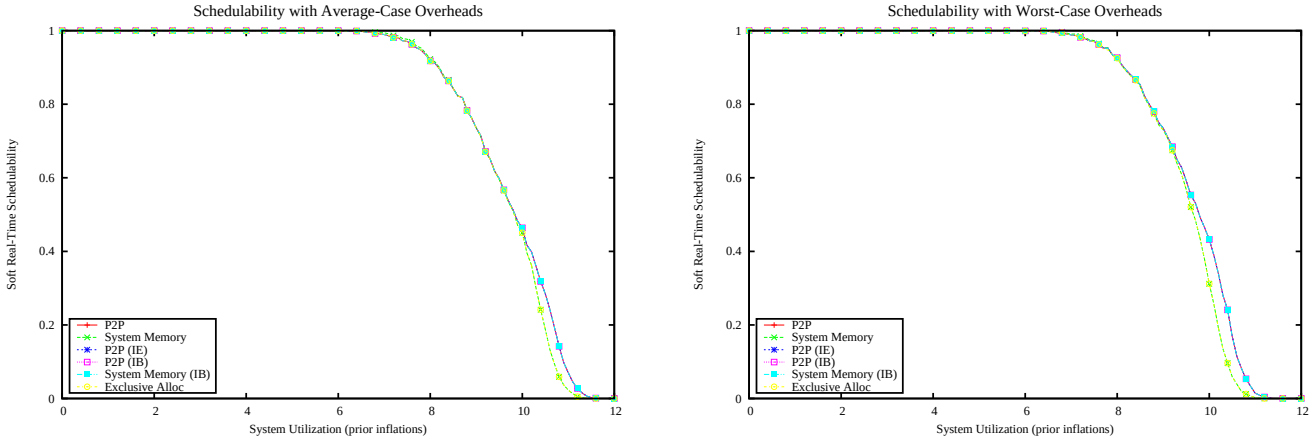

Figure 1129: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

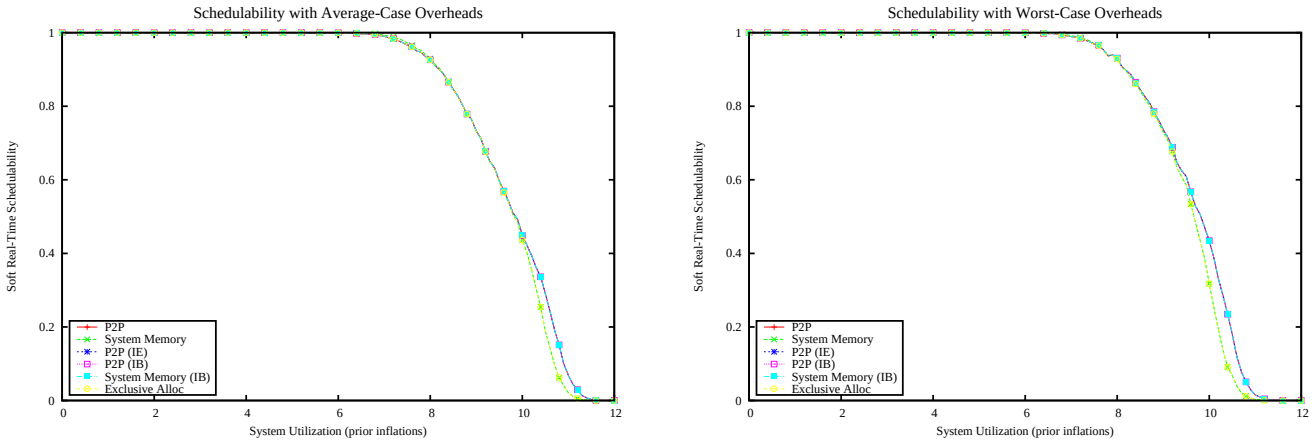

Figure 1130: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

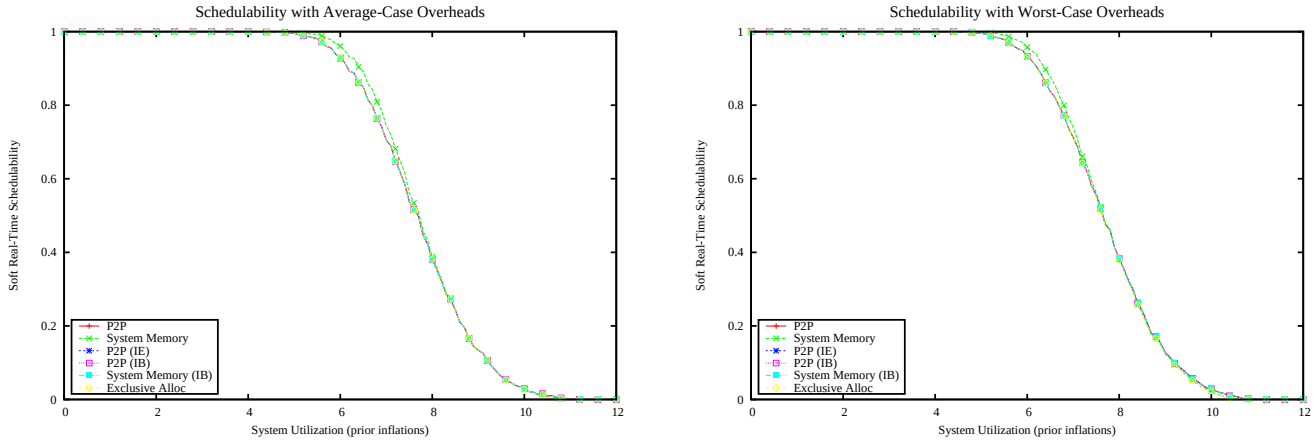

Figure 1131: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

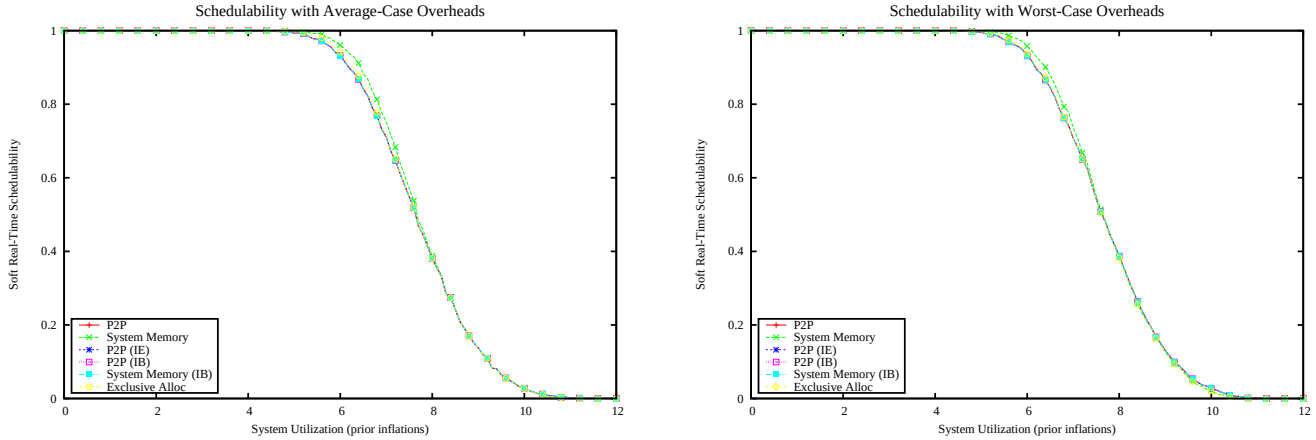

Figure 1132: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

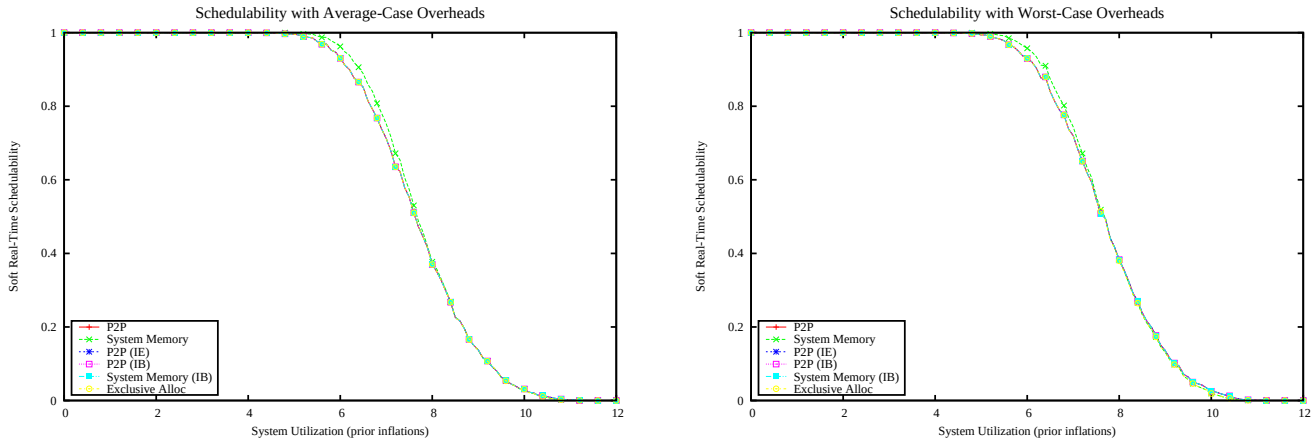

Figure 1133: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

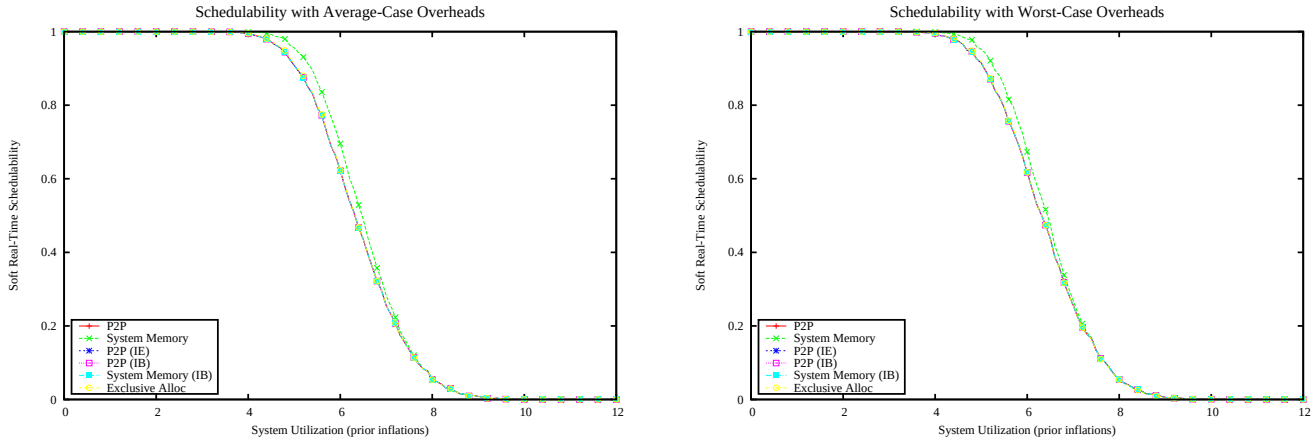

Figure 1134: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

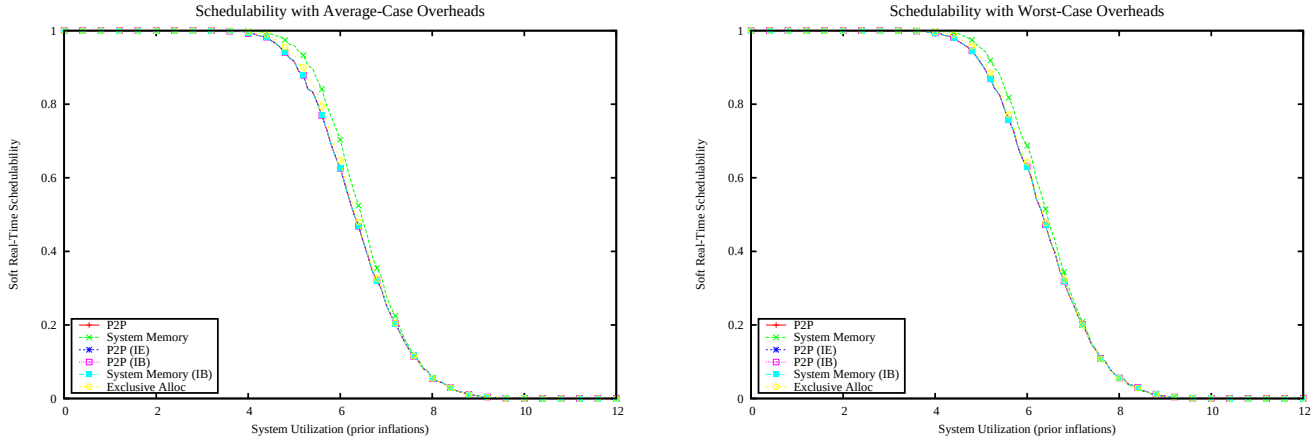

Figure 1135: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

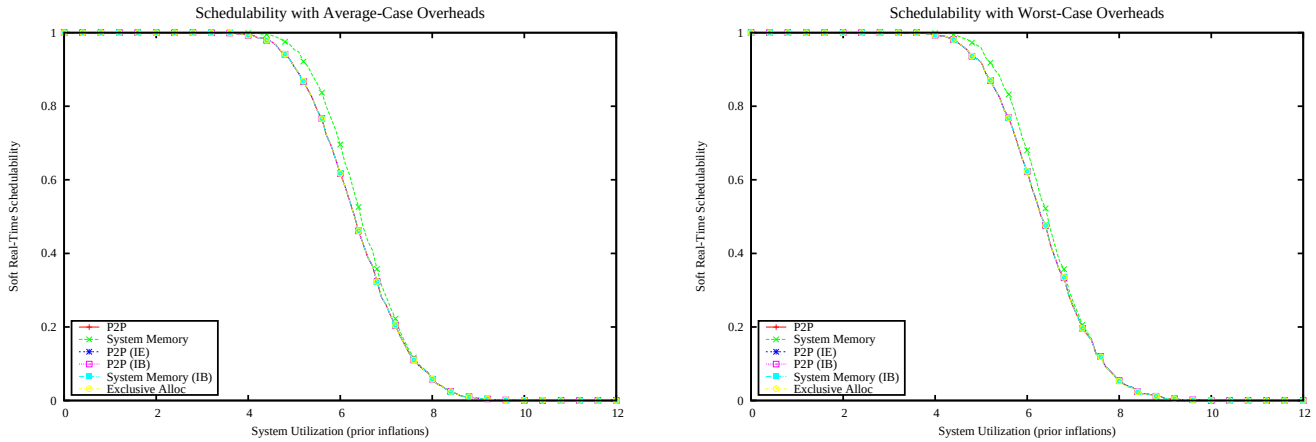

Figure 1136: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

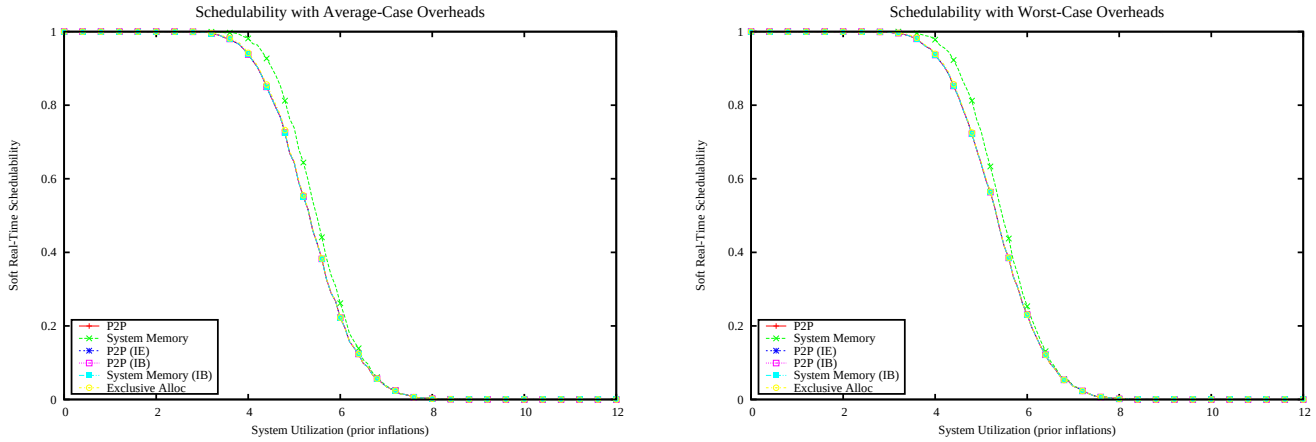

Figure 1137: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

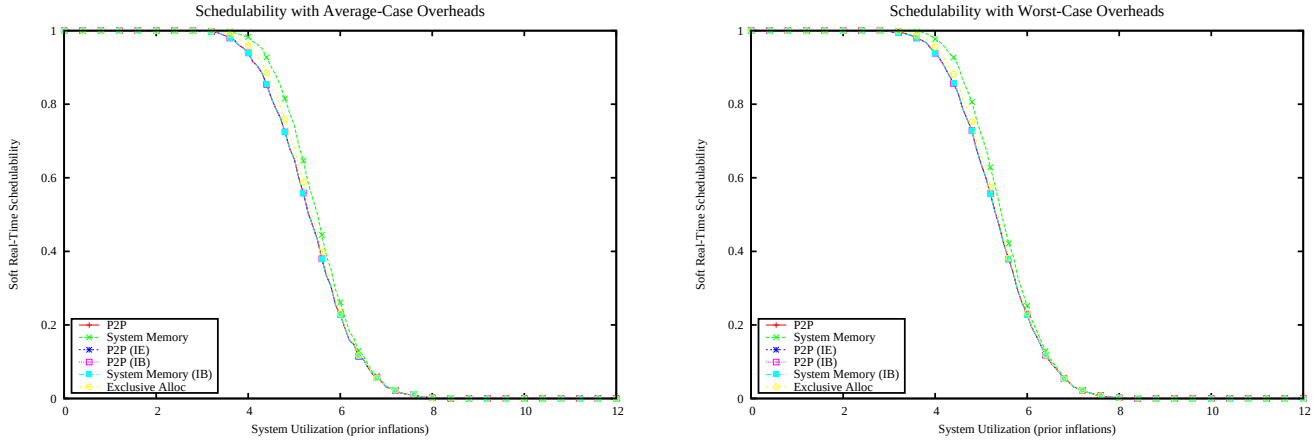

Figure 1138: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

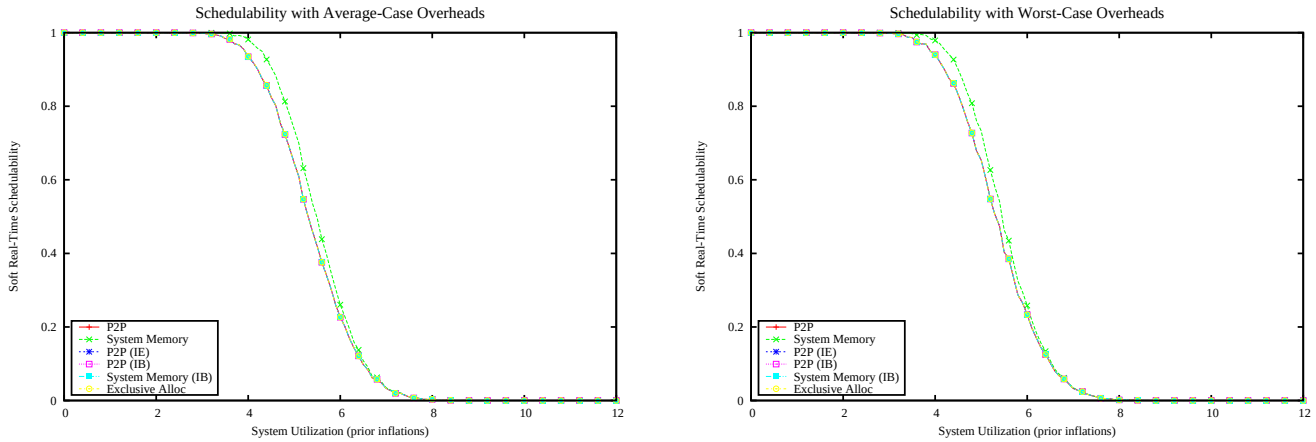

Figure 1139: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

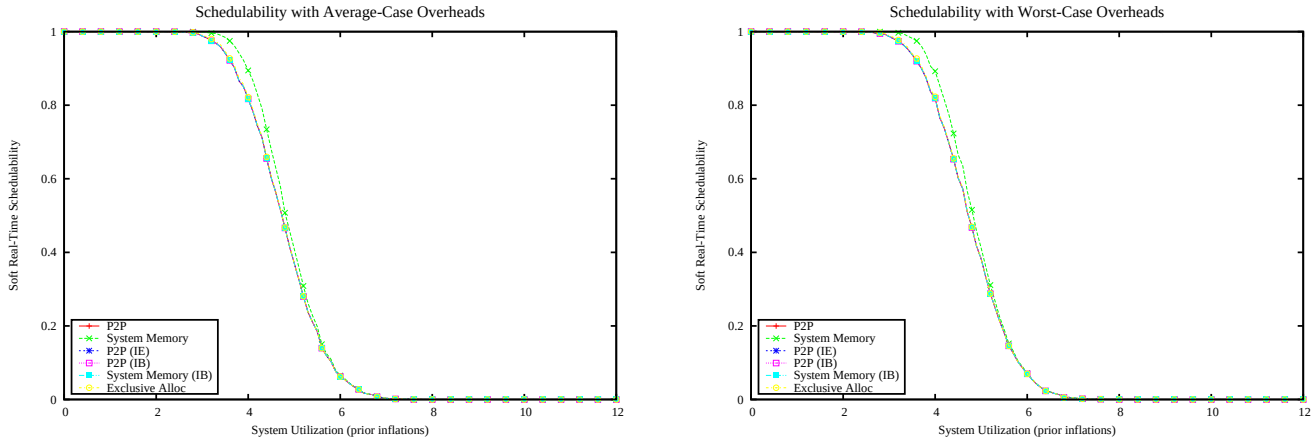

Figure 1140: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

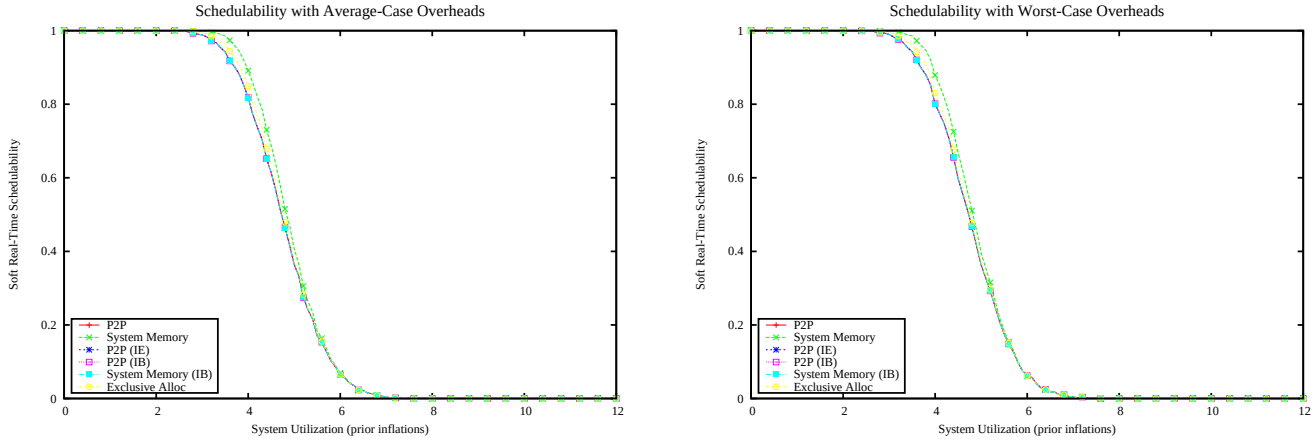

Figure 1141: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

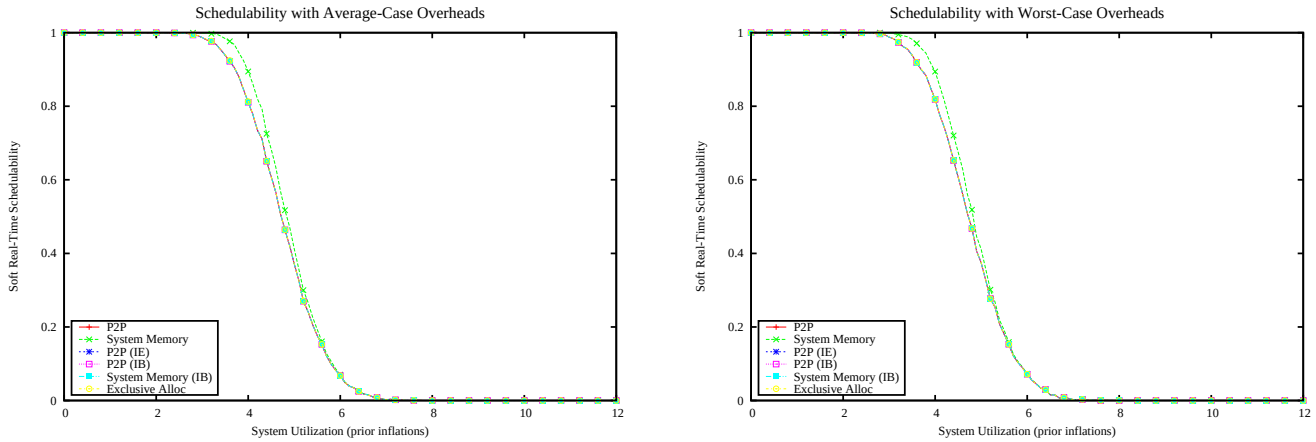

Figure 1142: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

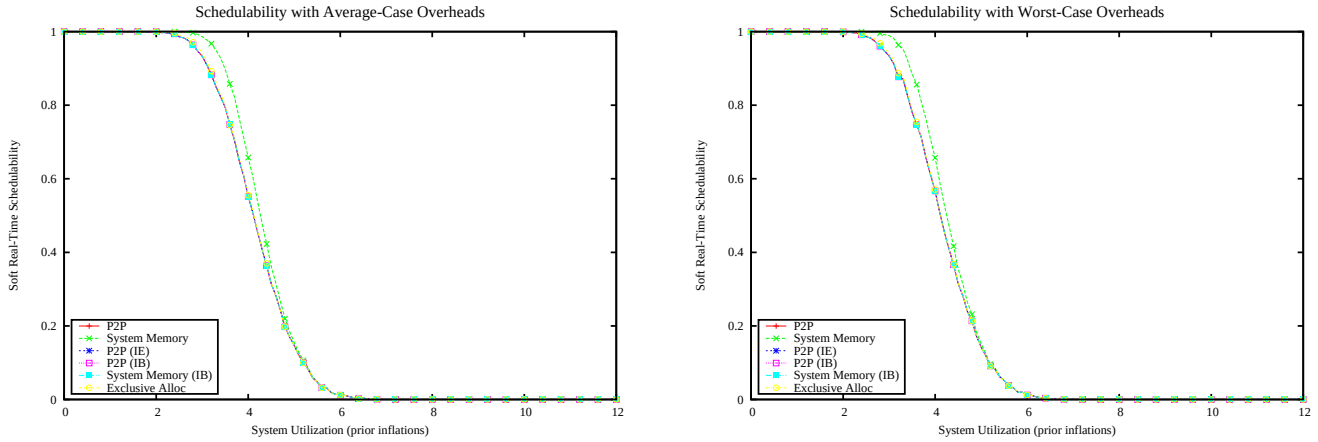

Figure 1143: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

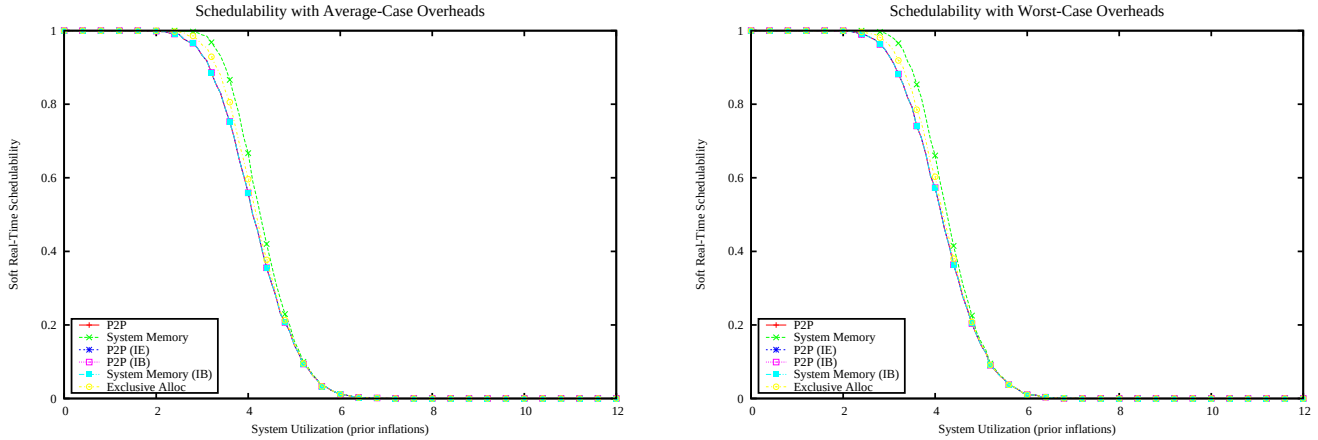

Figure 1144: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

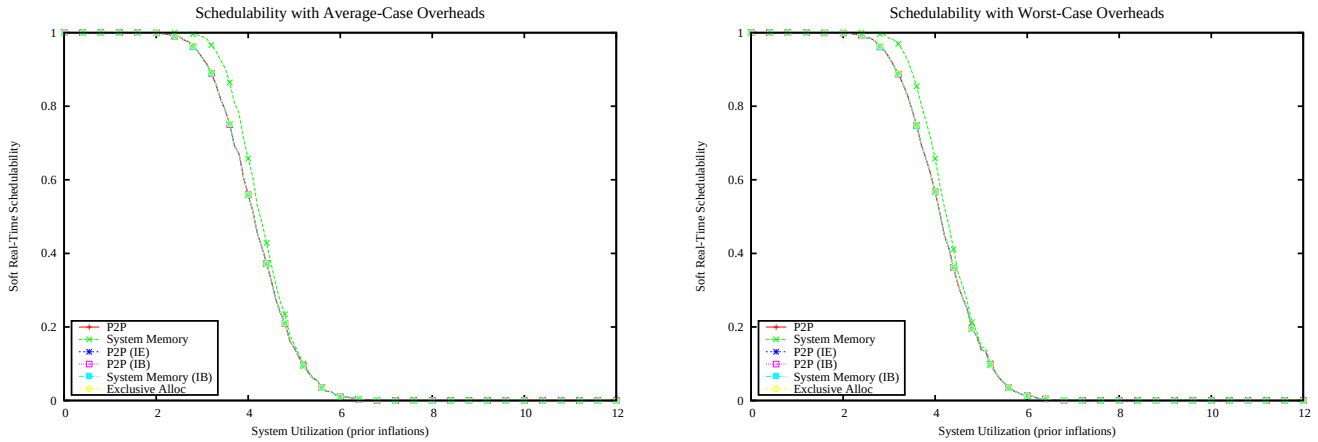

Figure 1145: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

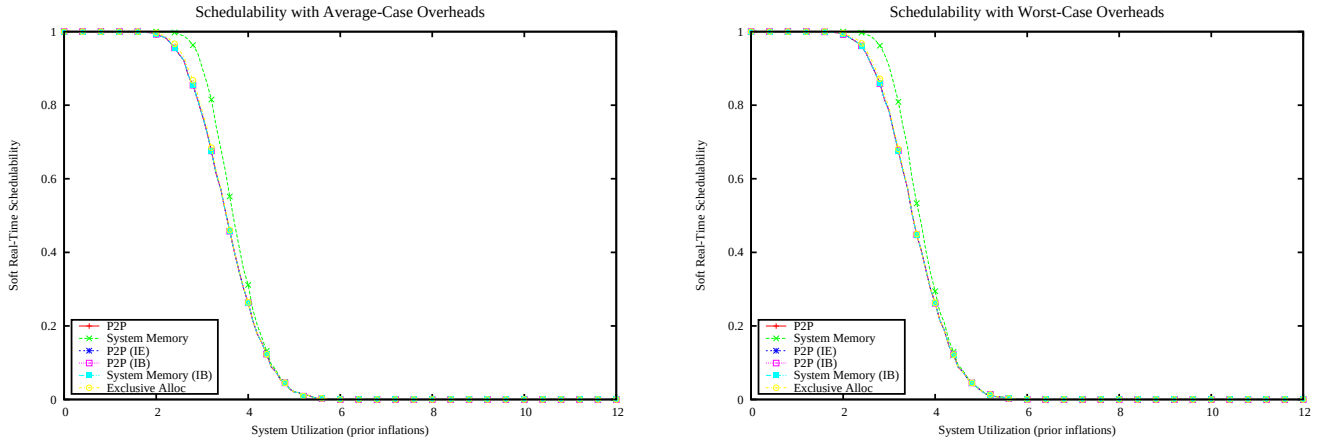

Figure 1146: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

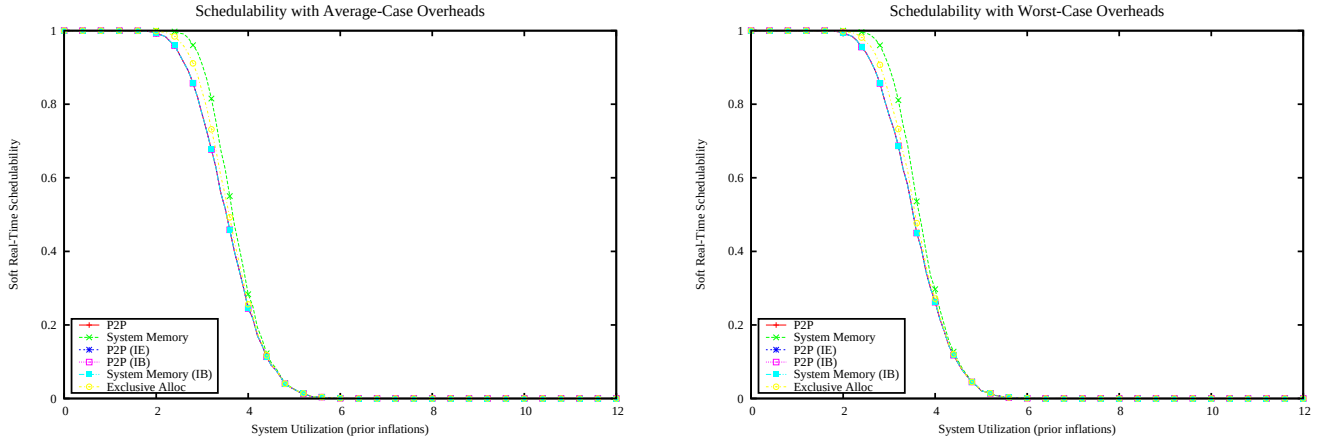

Figure 1147: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

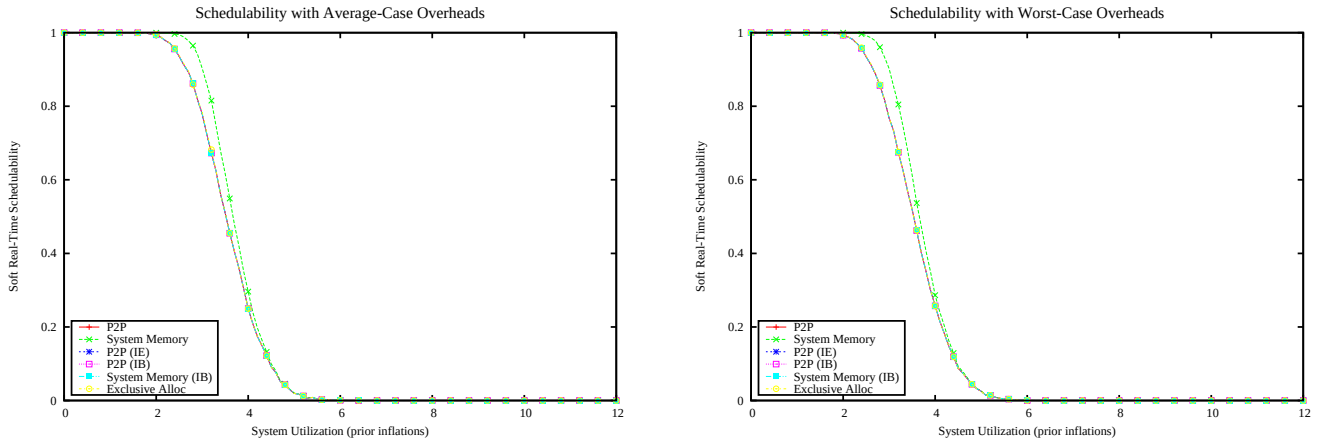

Figure 1148: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

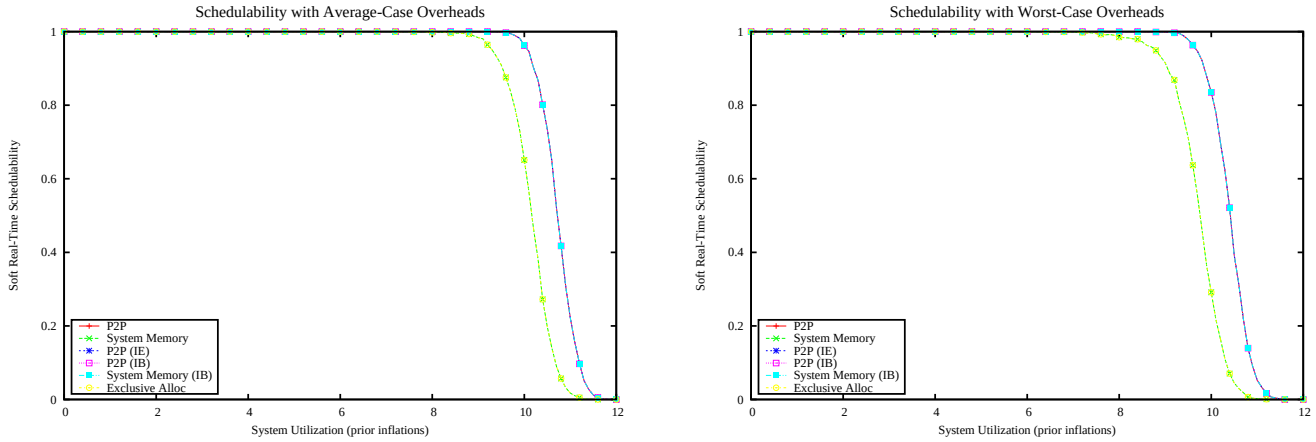

Figure 1149: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

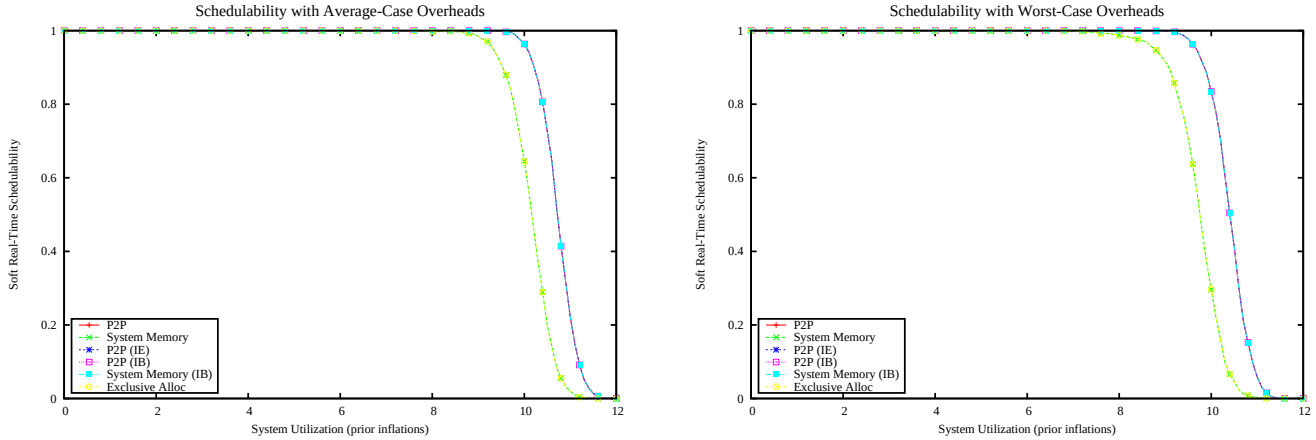

Figure 1150: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

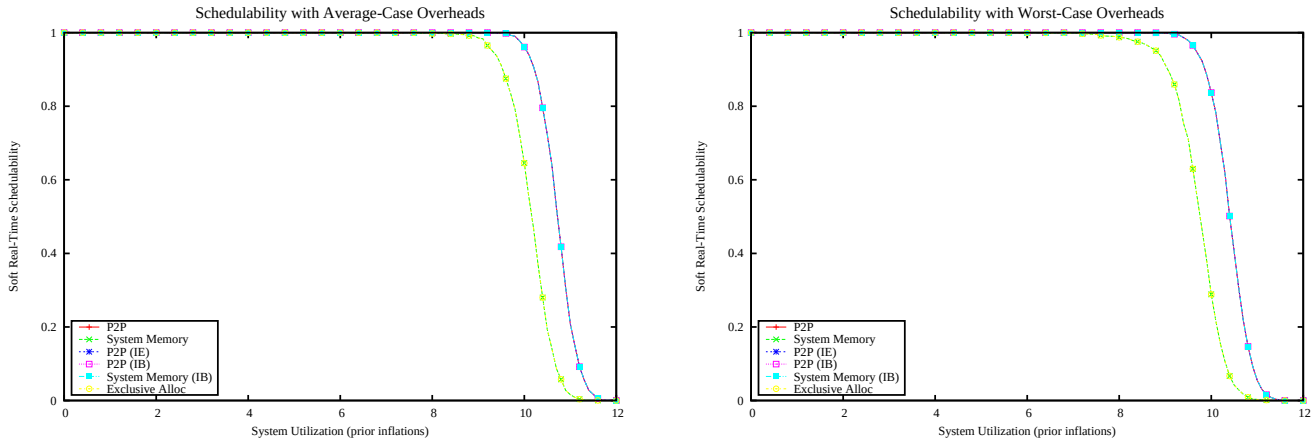

Figure 1151: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

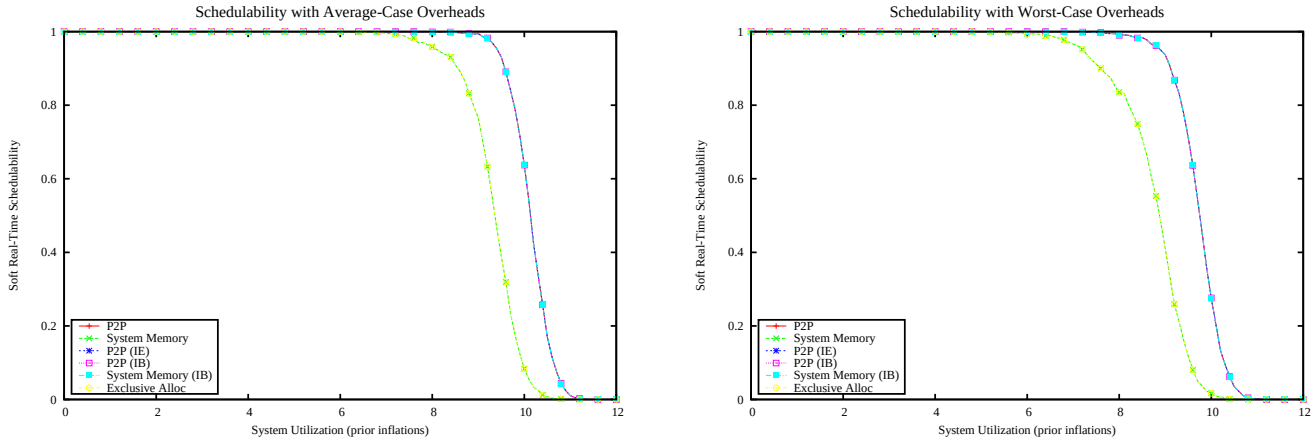

Figure 1152: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

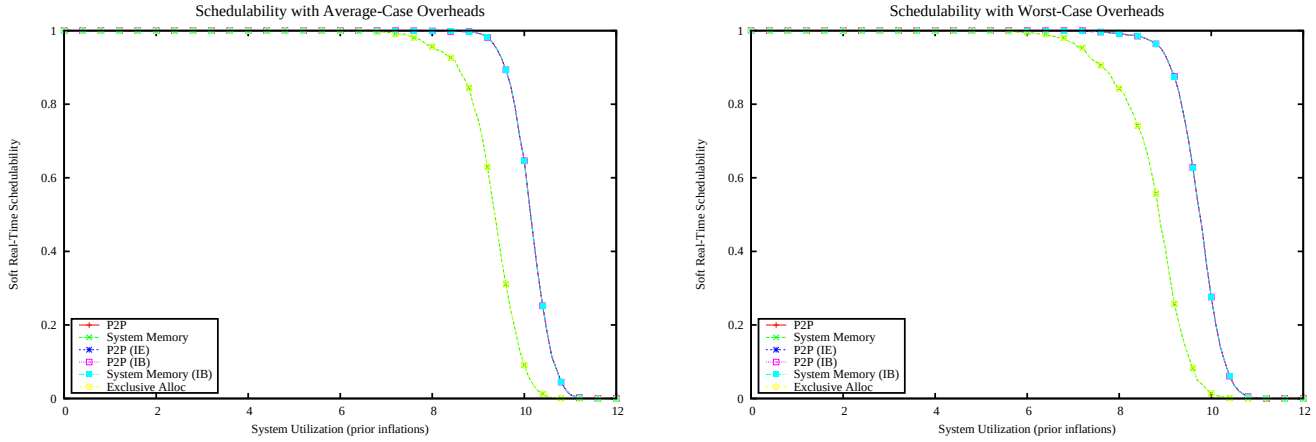

Figure 1153: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

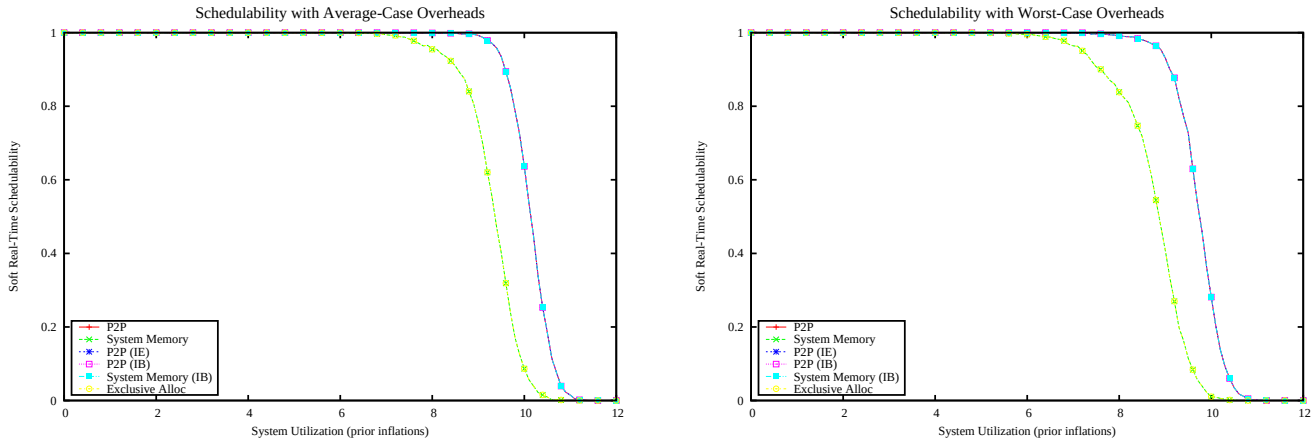

Figure 1154: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

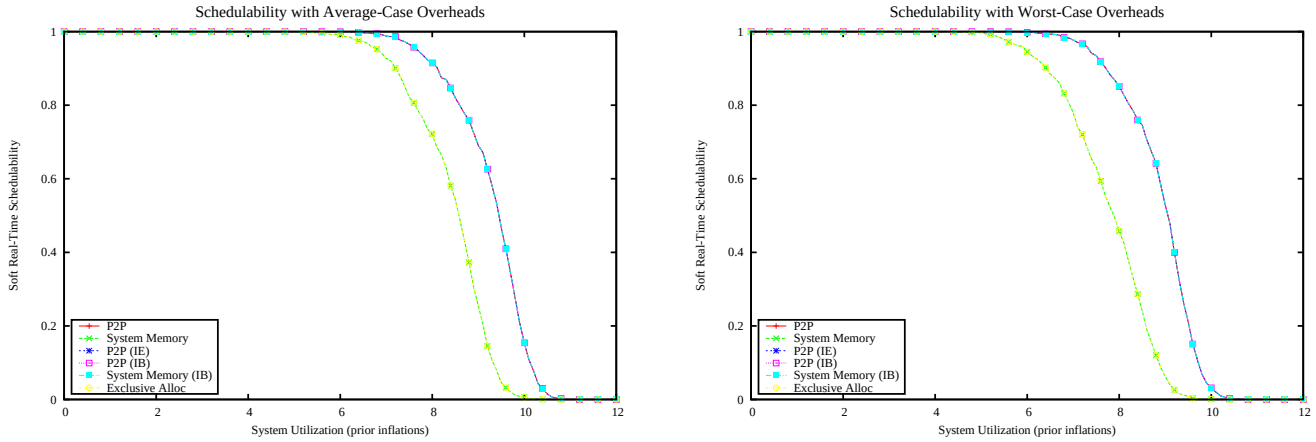

Figure 1155: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

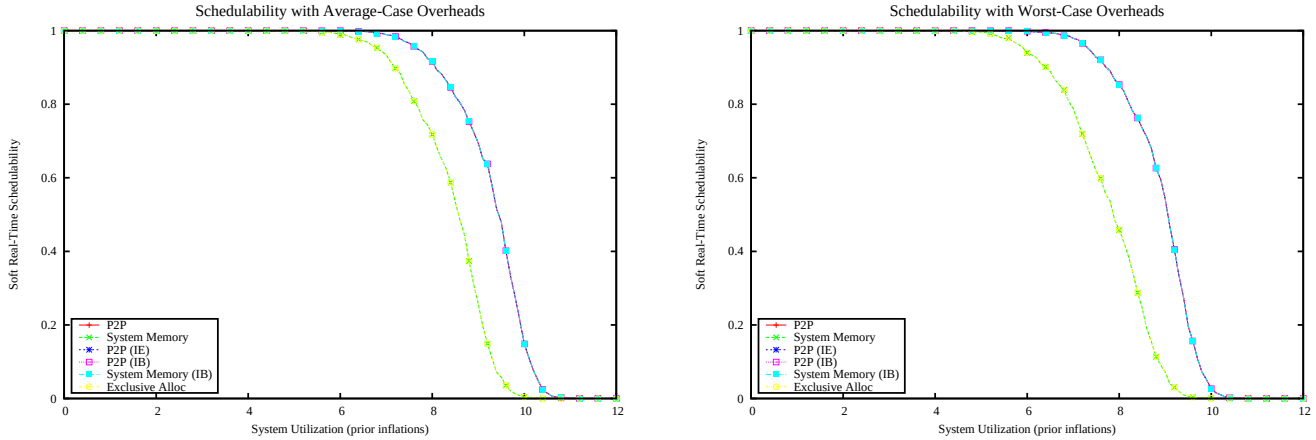

Figure 1156: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

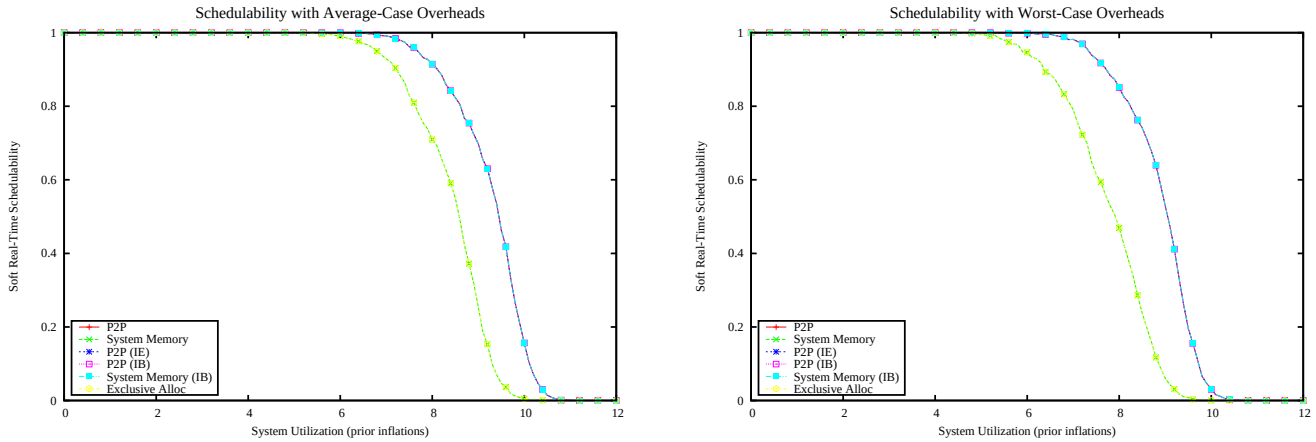

Figure 1157: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

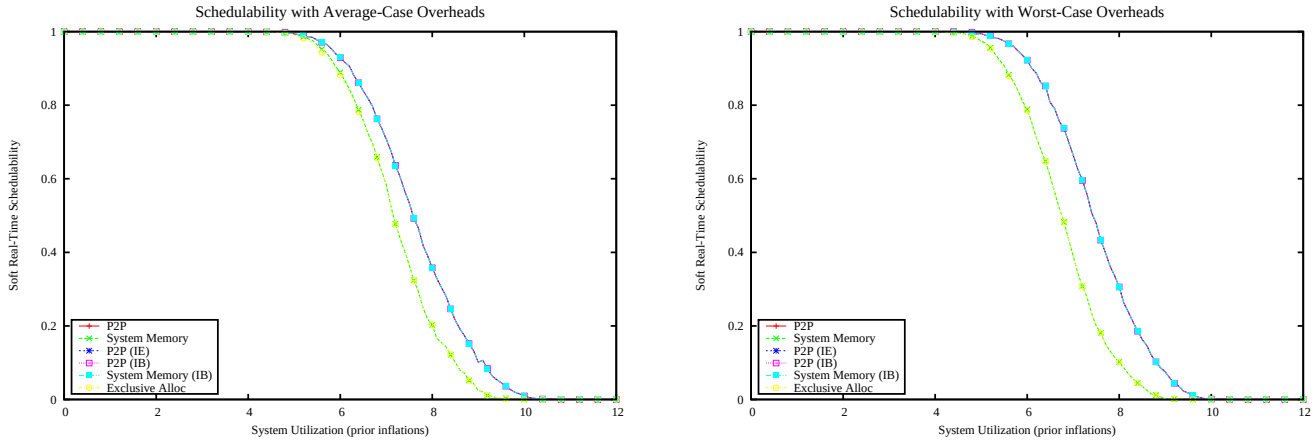

Figure 1158: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

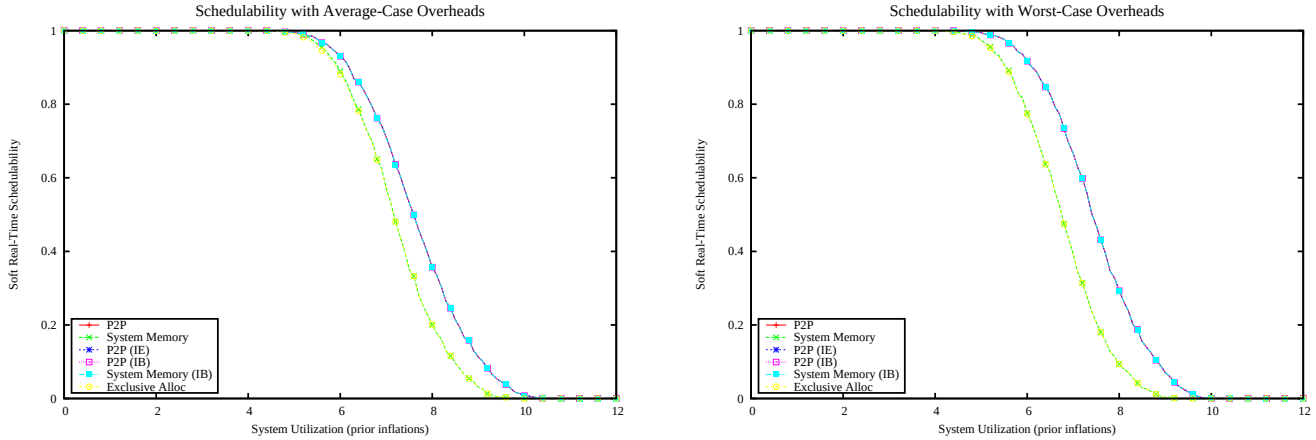

Figure 1159: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

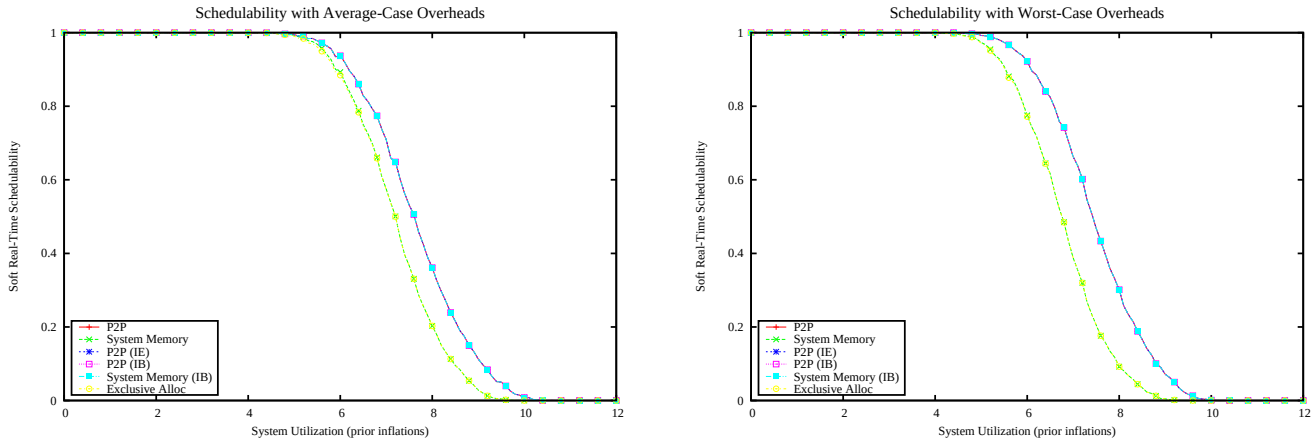

Figure 1160: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

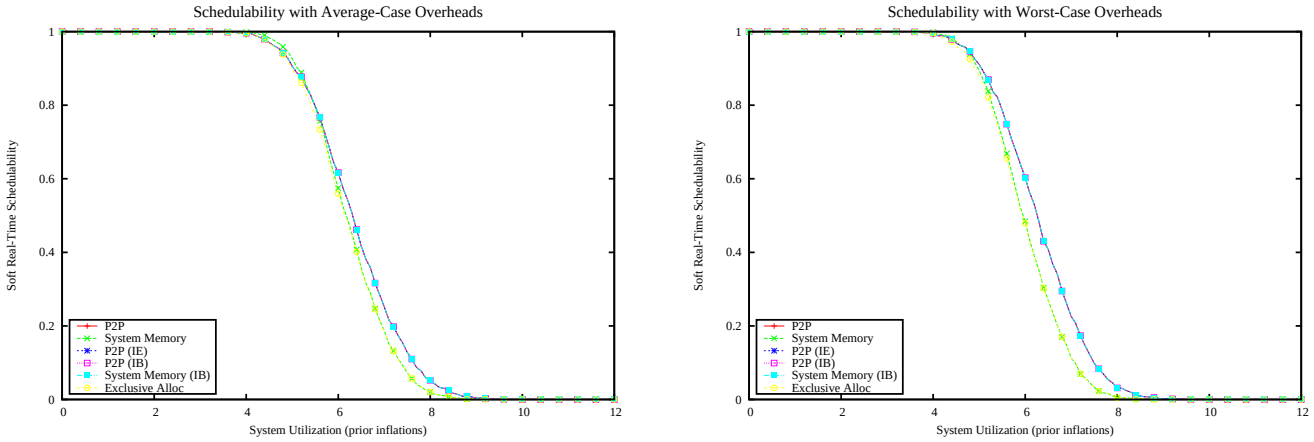

Figure 1161: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

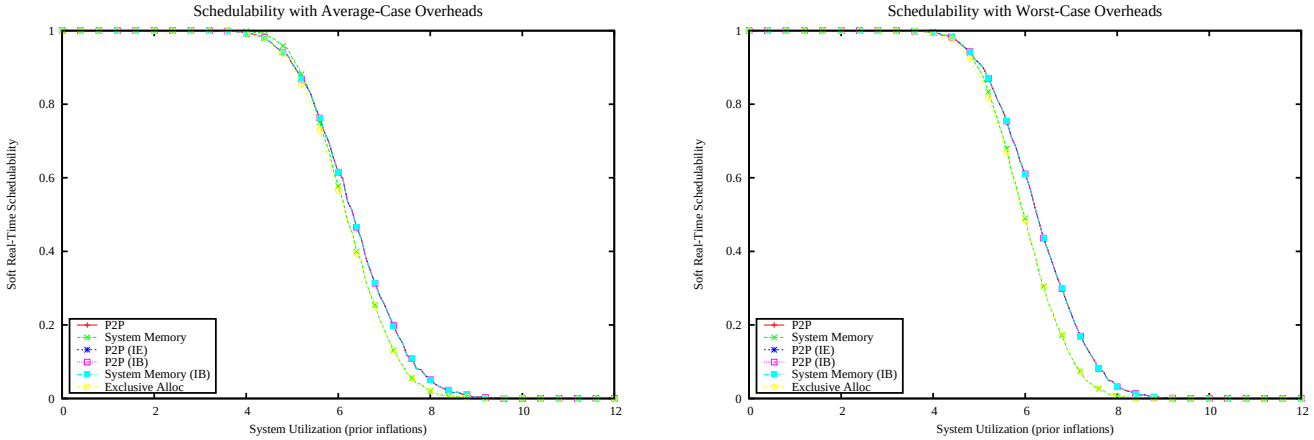

Figure 1162: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

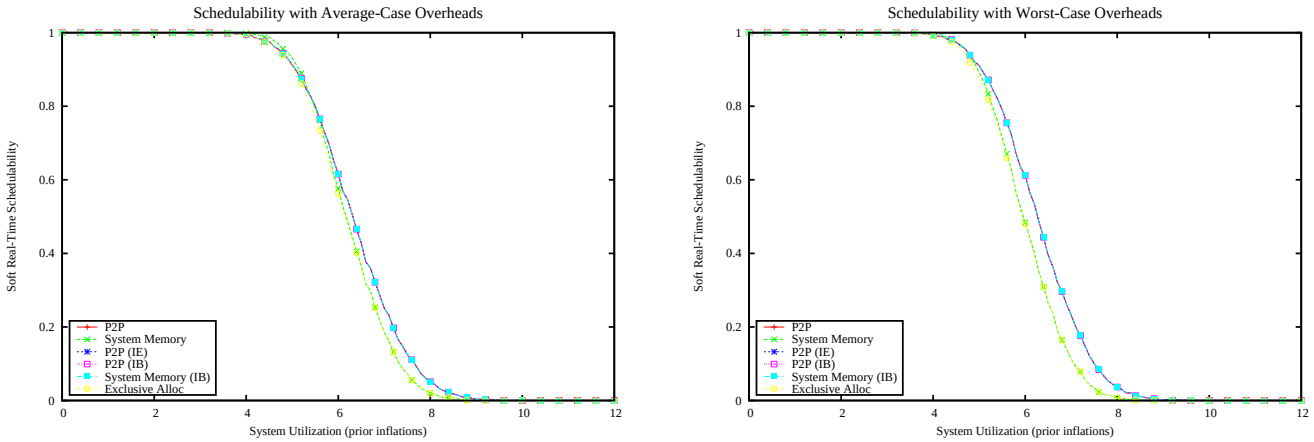

Figure 1163: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

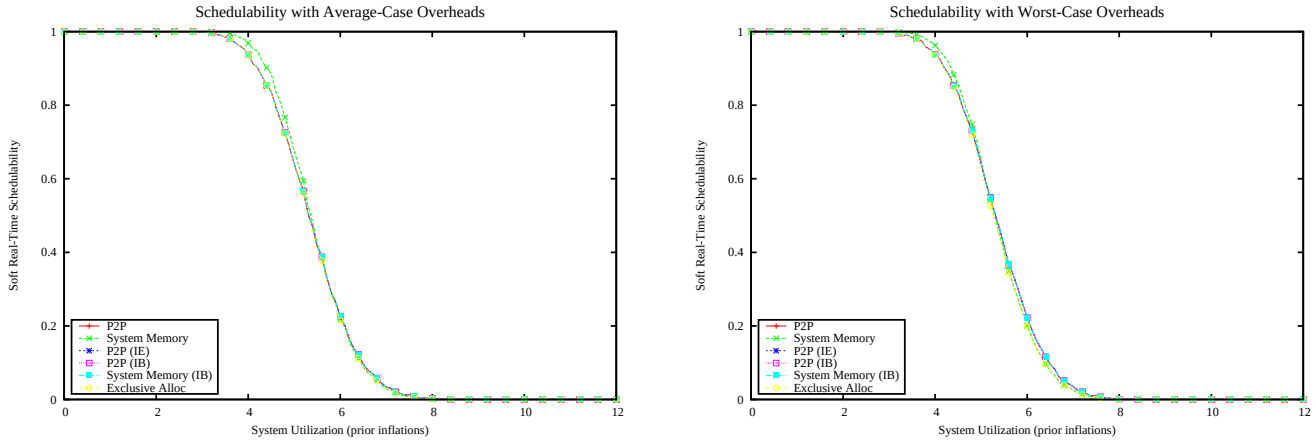

Figure 1164: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

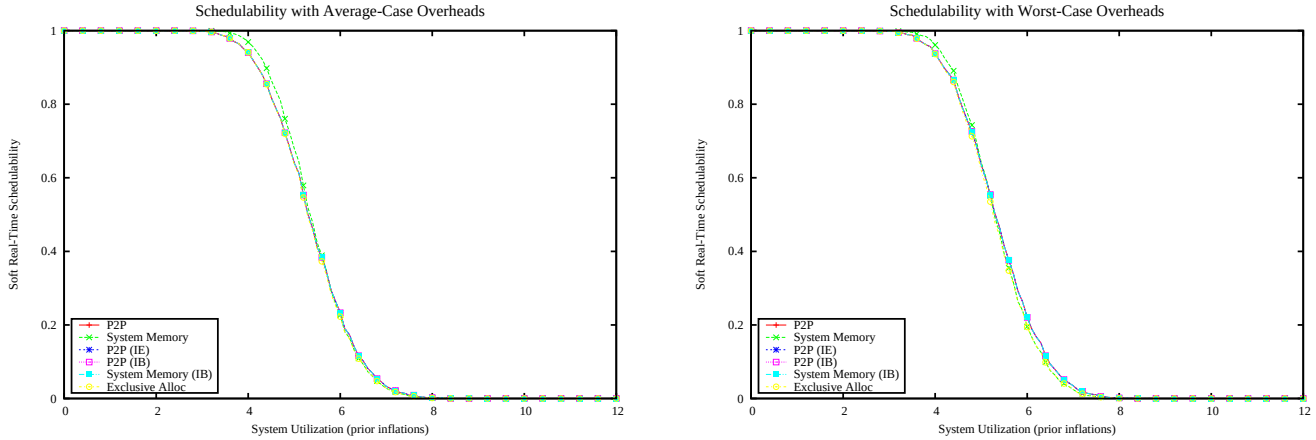

Figure 1165: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

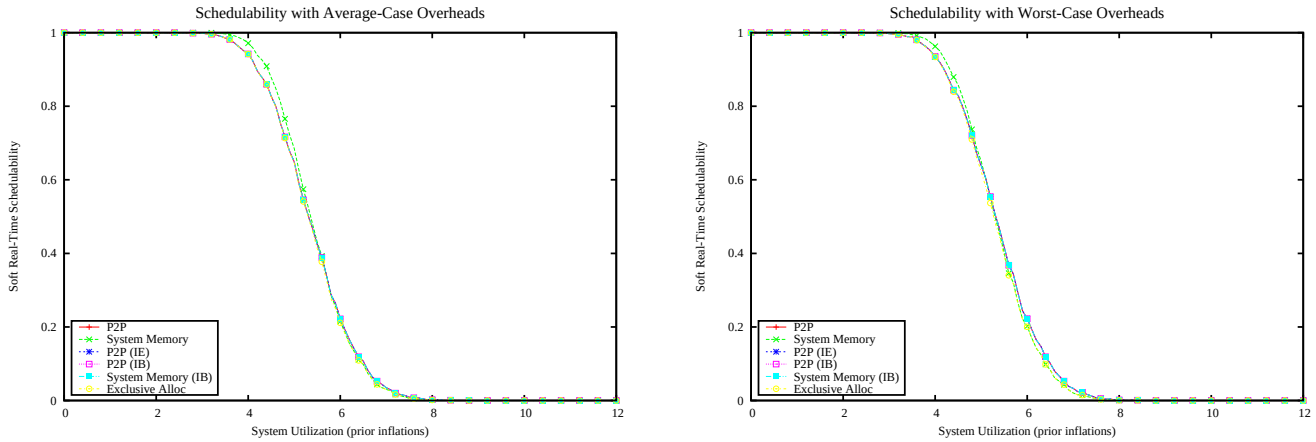

Figure 1166: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

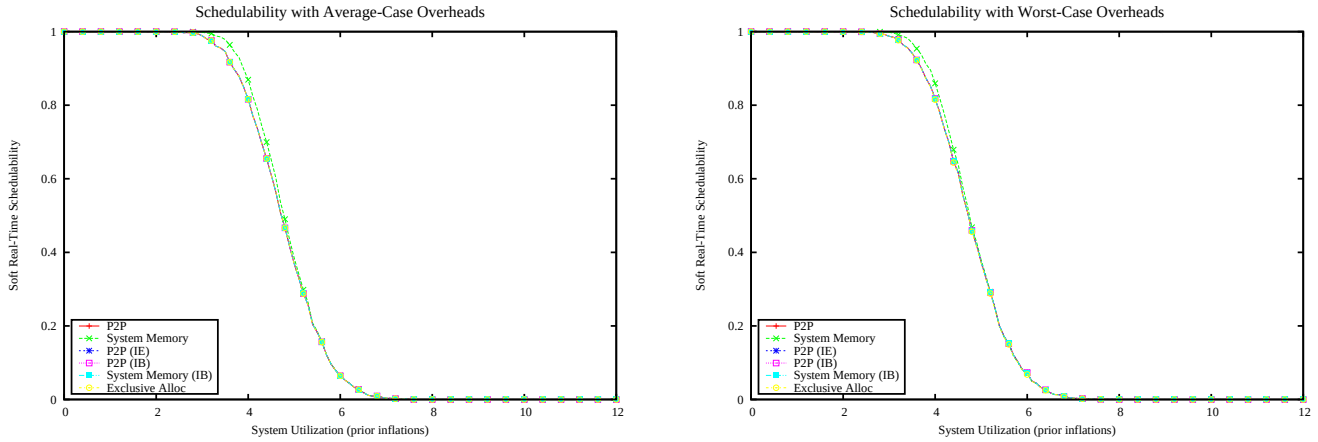

Figure 1167: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

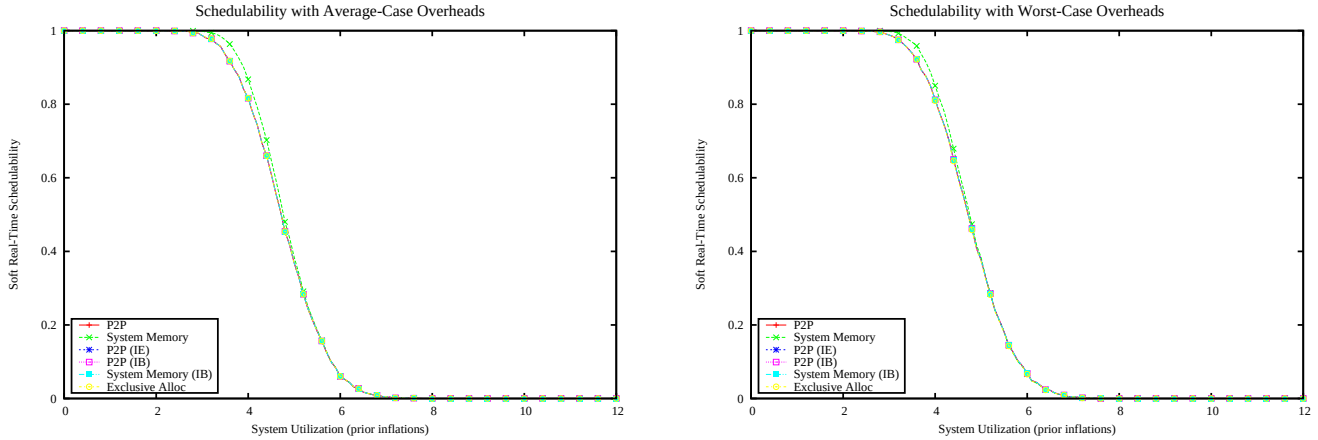

Figure 1168: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

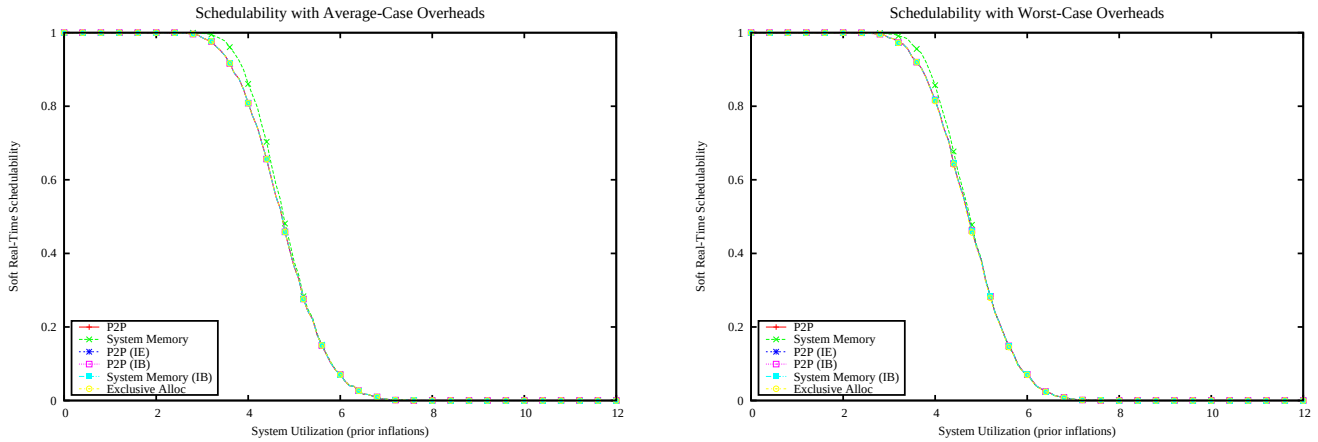

Figure 1169: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

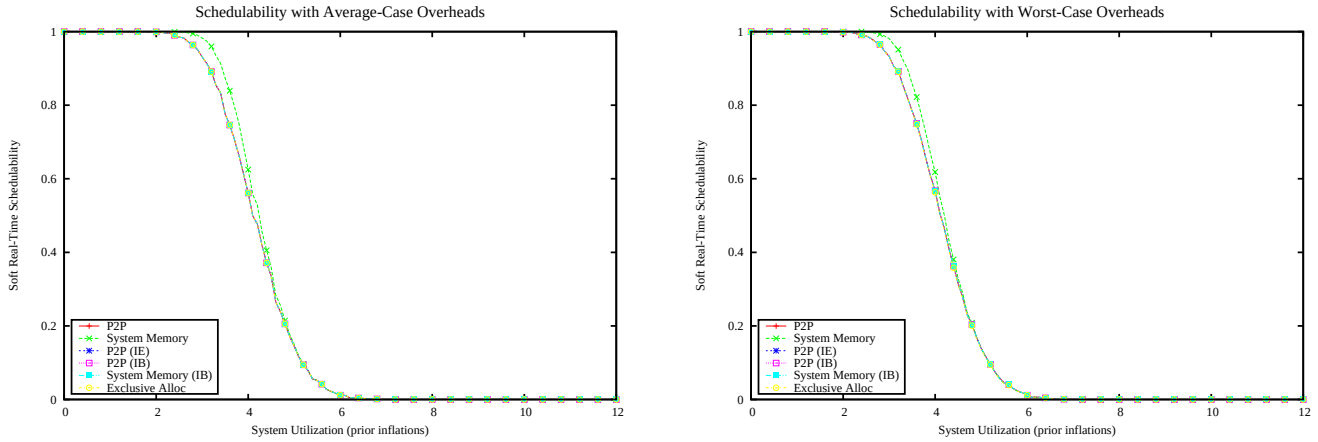

Figure 1170: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

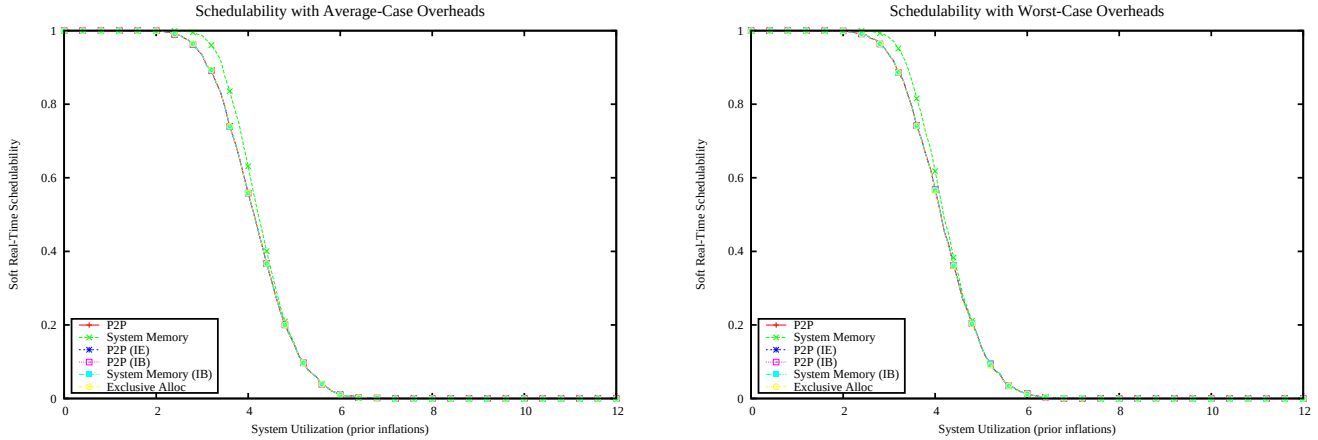

Figure 1171: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

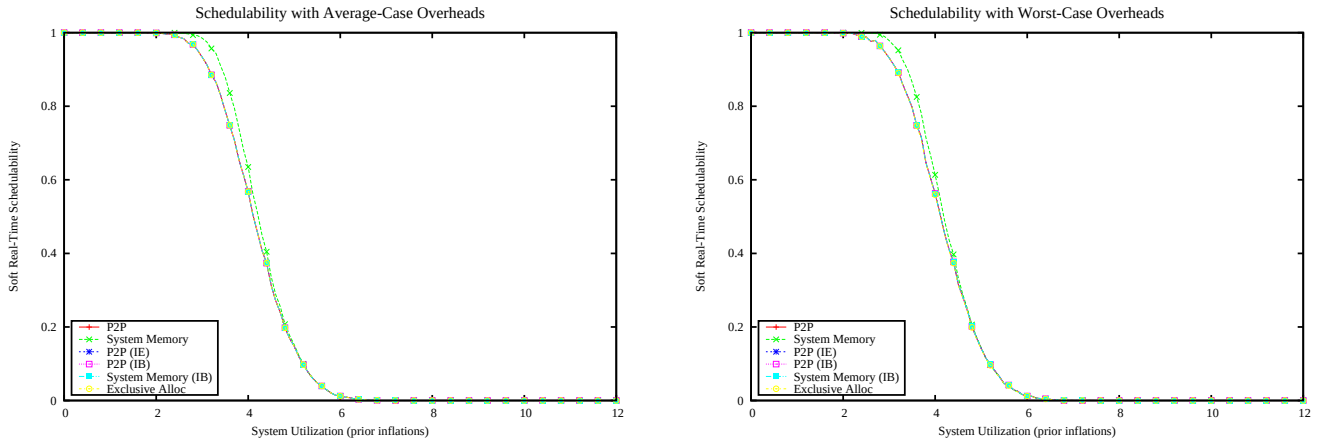

Figure 1172: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

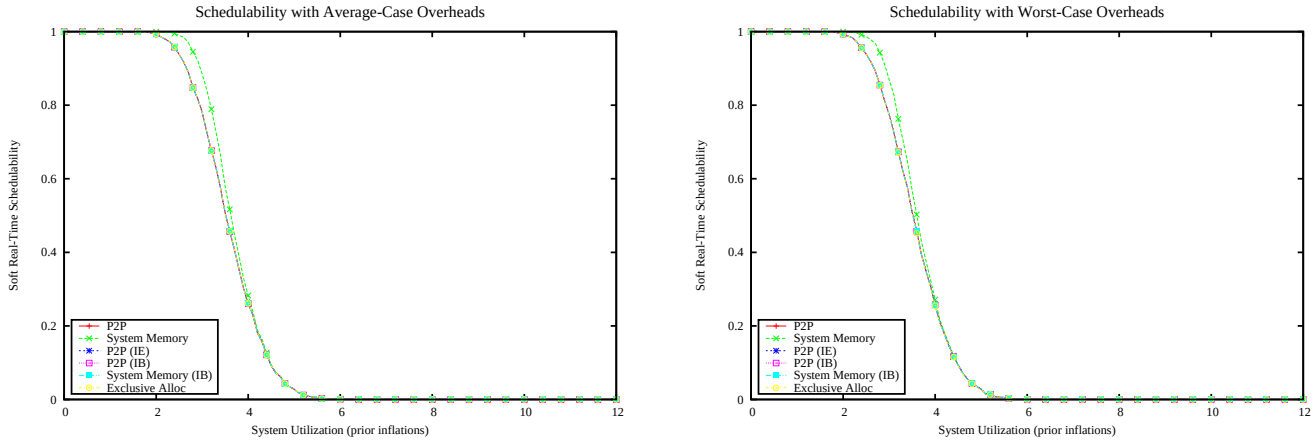

Figure 1173: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

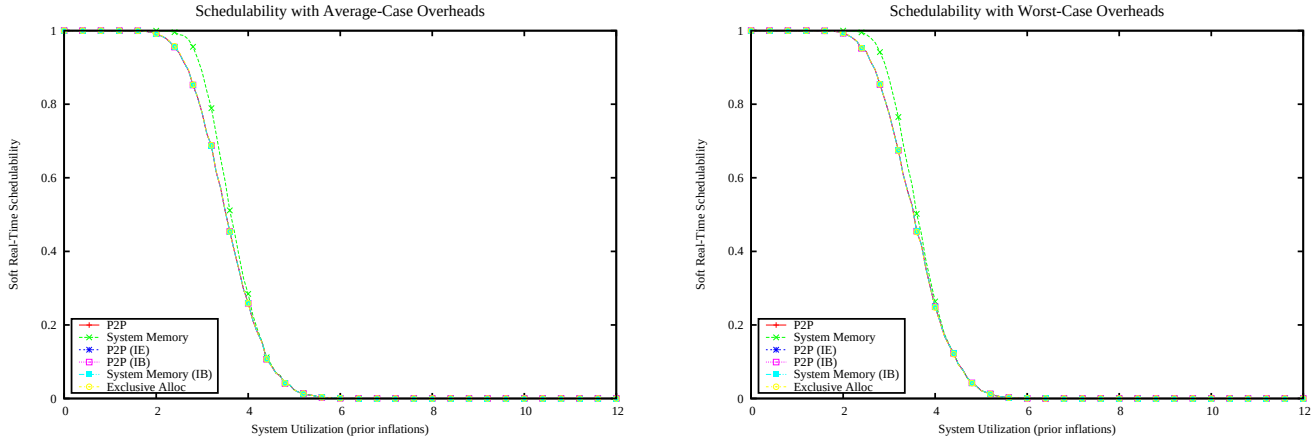

Figure 1174: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

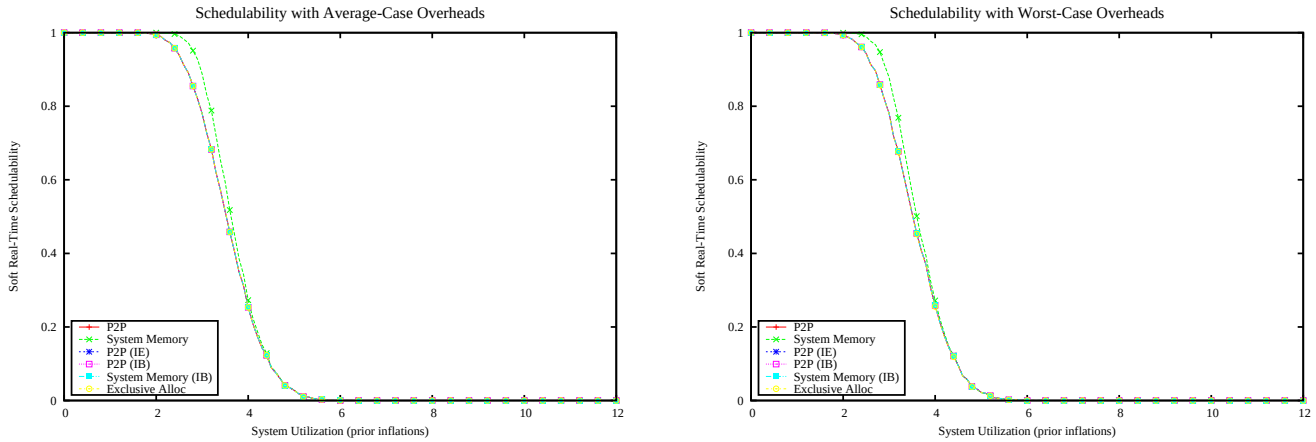

Figure 1175: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

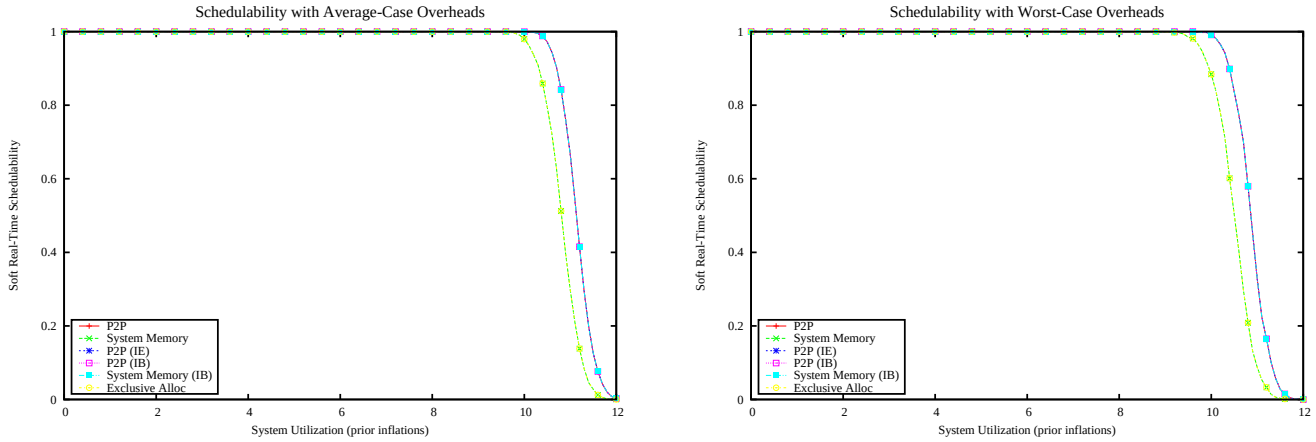

Figure 1176: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

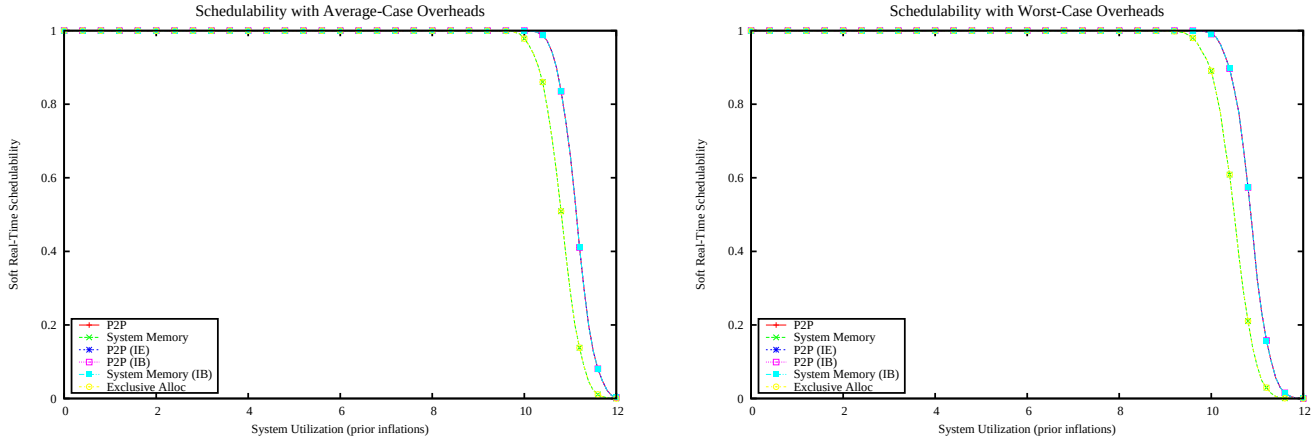

Figure 1177: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

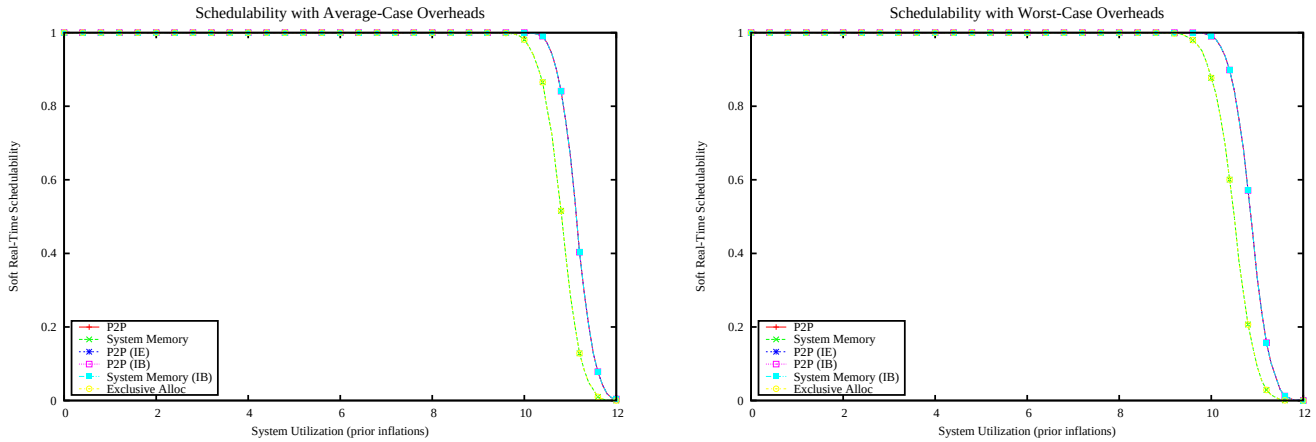

Figure 1178: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

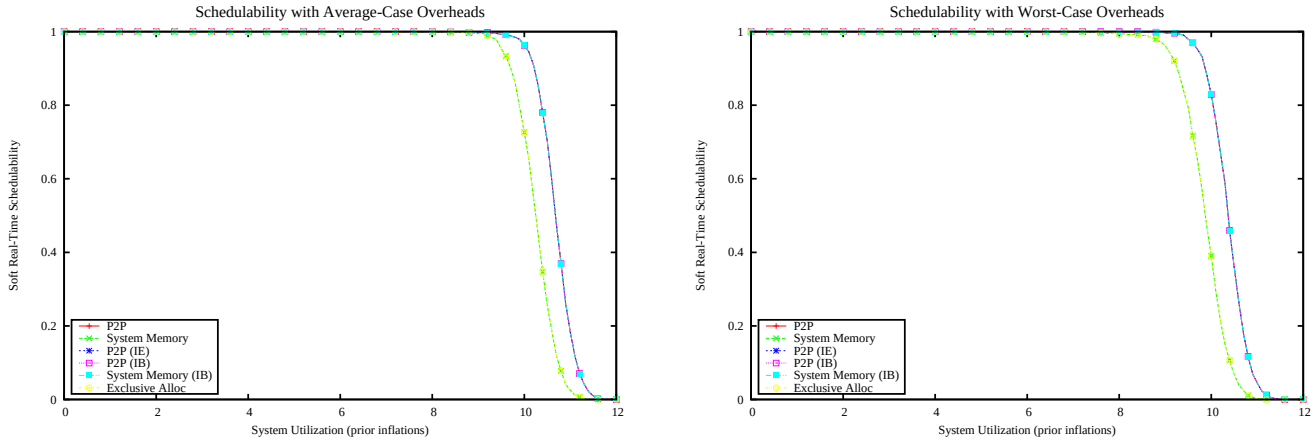

Figure 1179: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

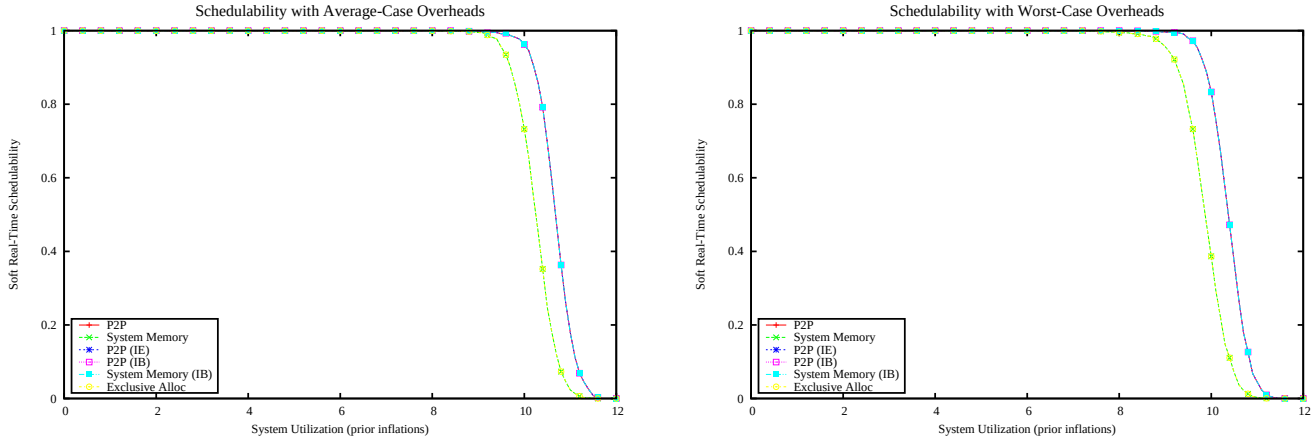

Figure 1180: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

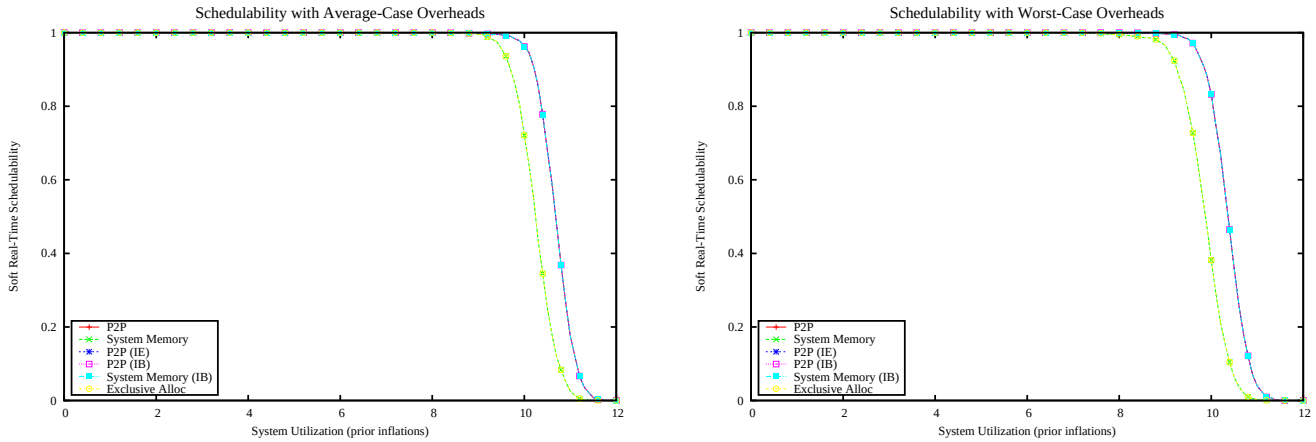

Figure 1181: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

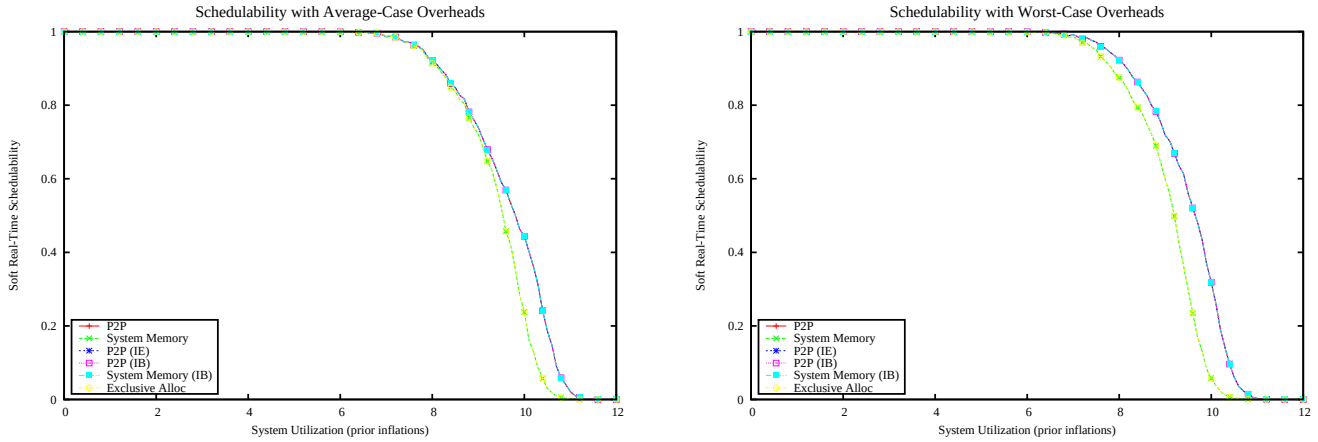

Figure 1182: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

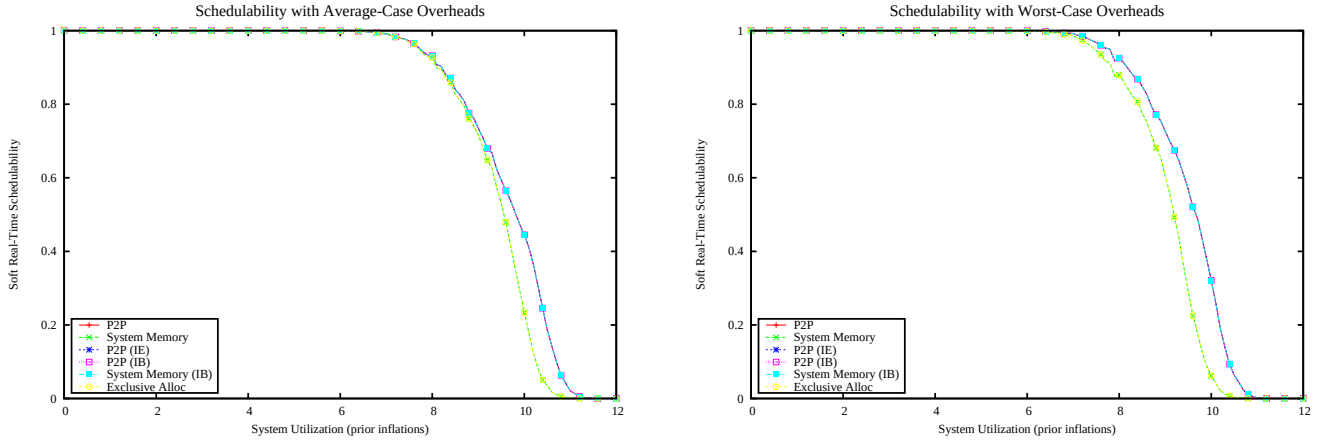

Figure 1183: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

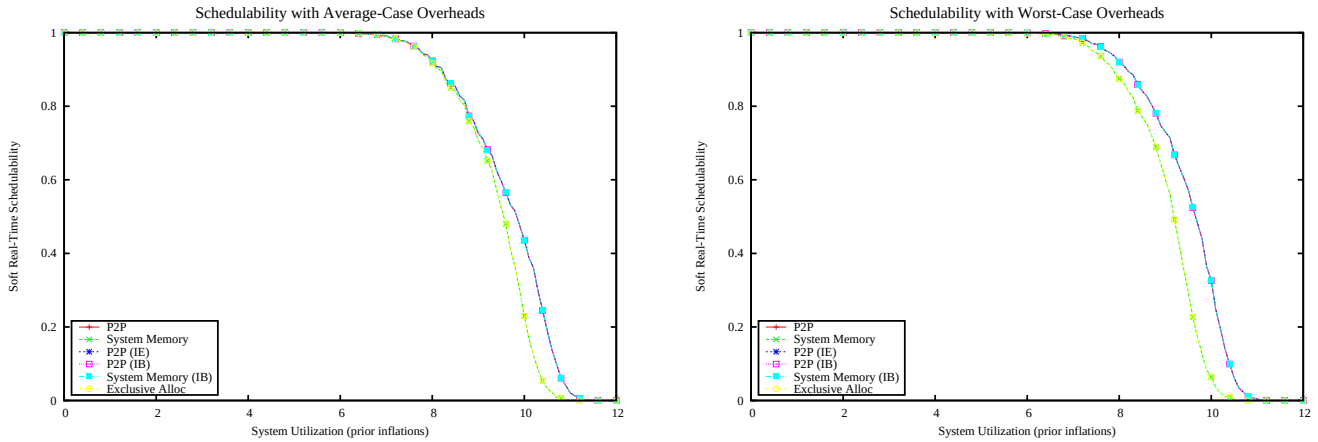

Figure 1184: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

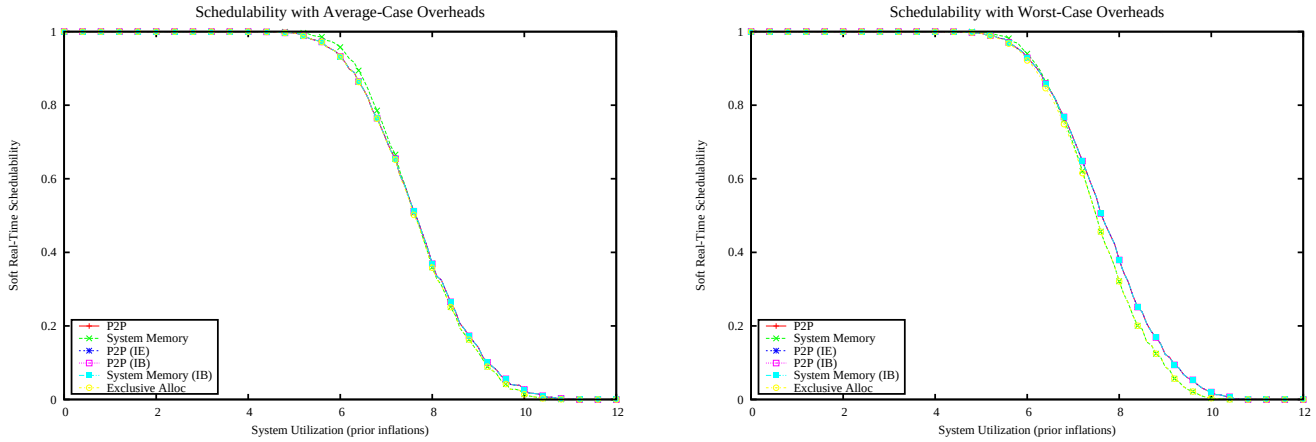

Figure 1185: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

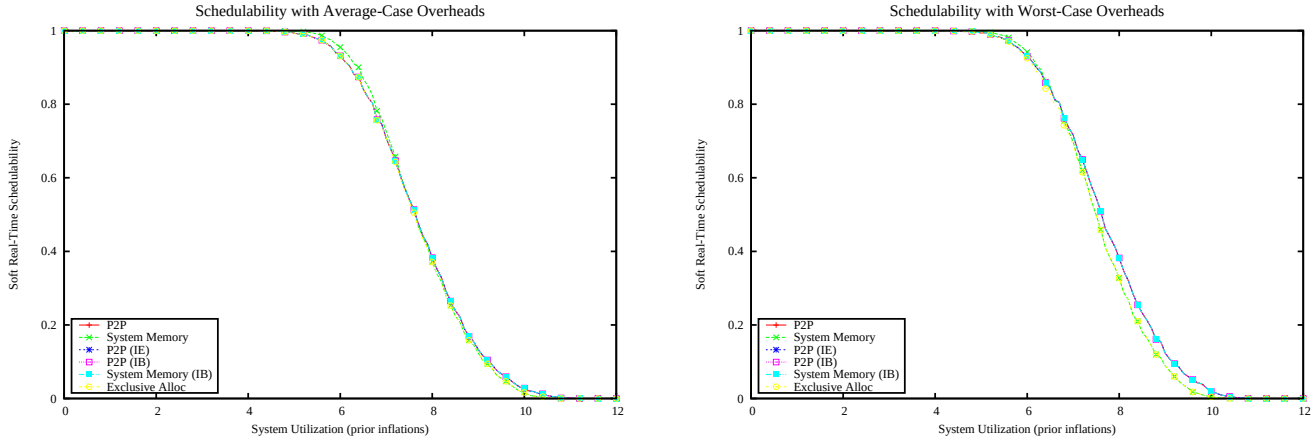

Figure 1186: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

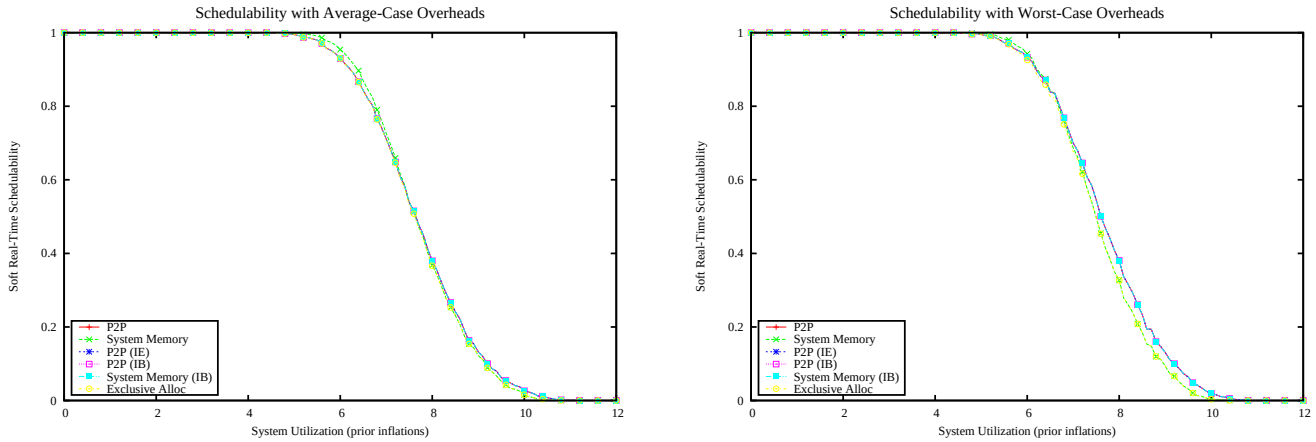

Figure 1187: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

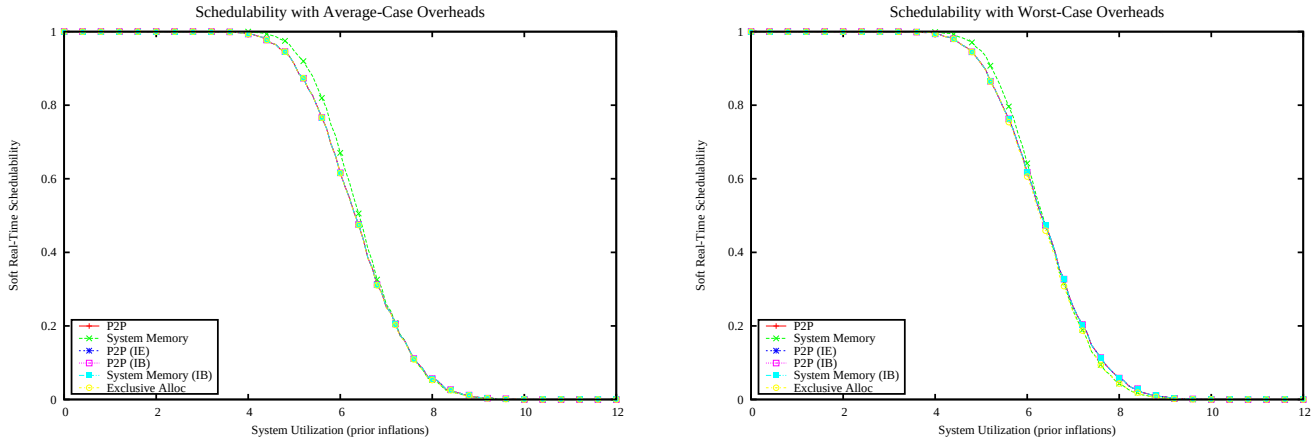

Figure 1188: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

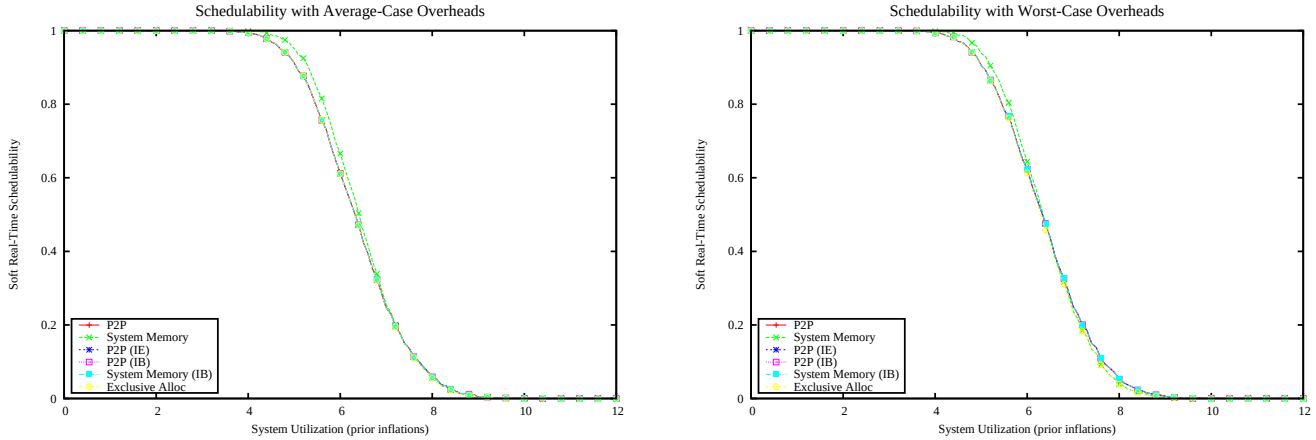

Figure 1189: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

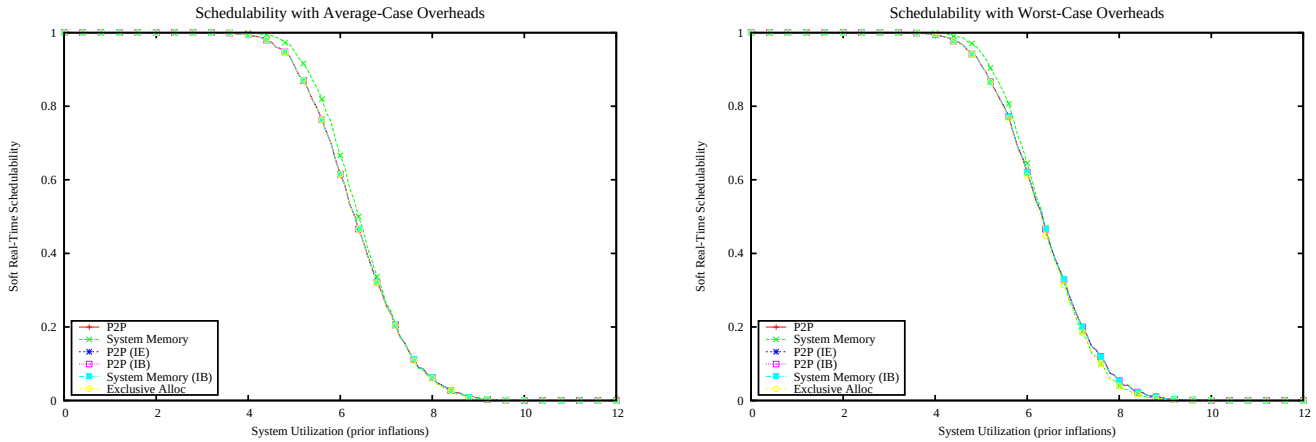

Figure 1190: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

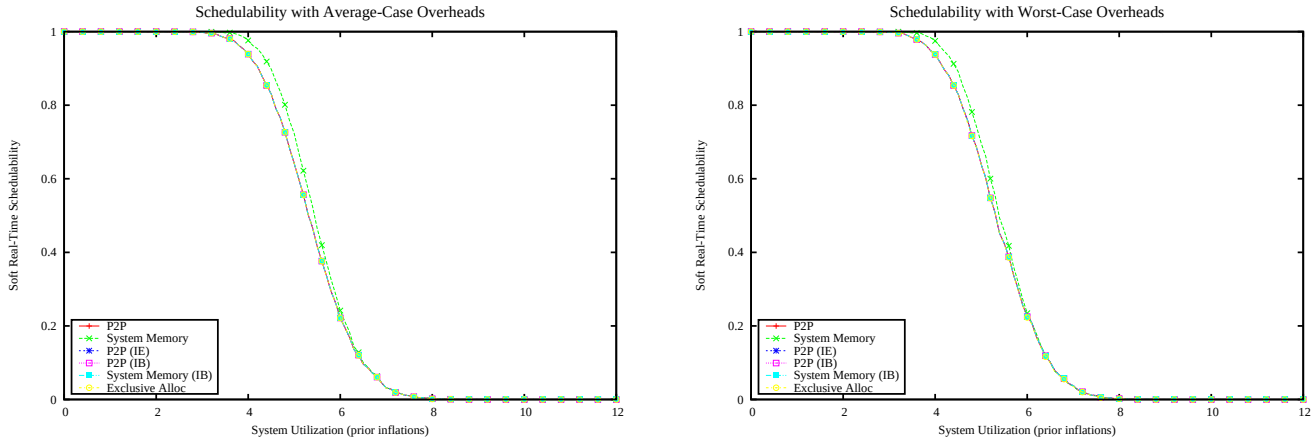

Figure 1191: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

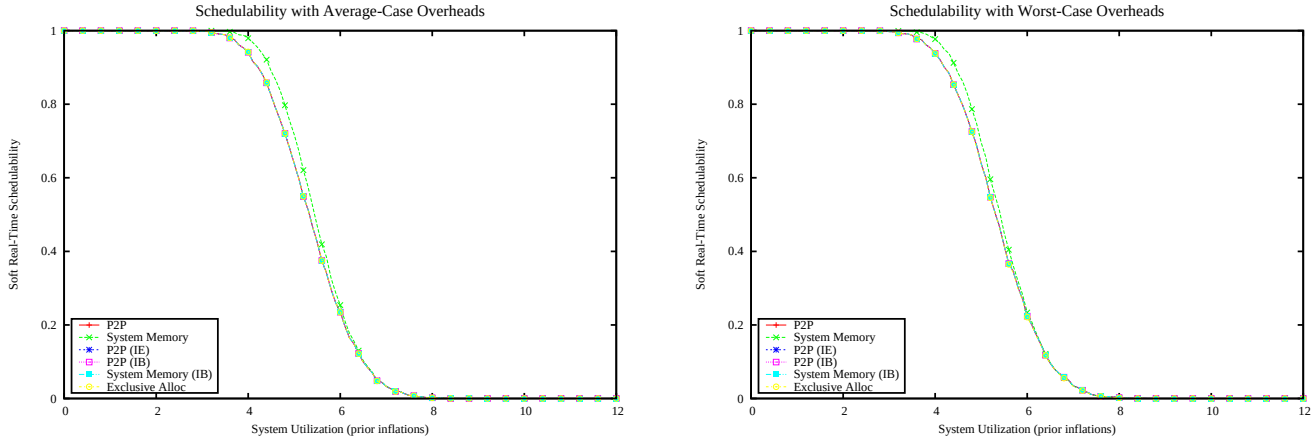

Figure 1192: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

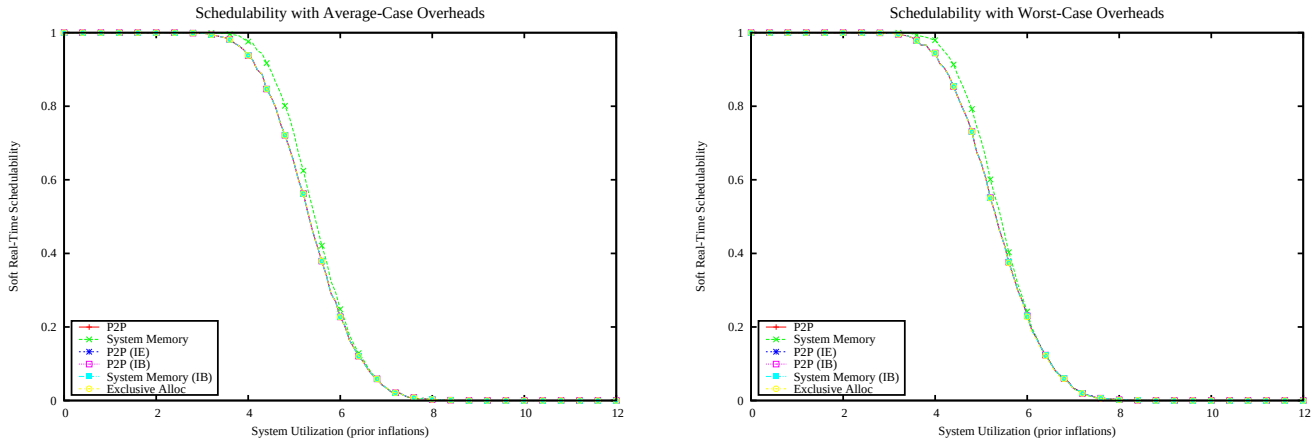

Figure 1193: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

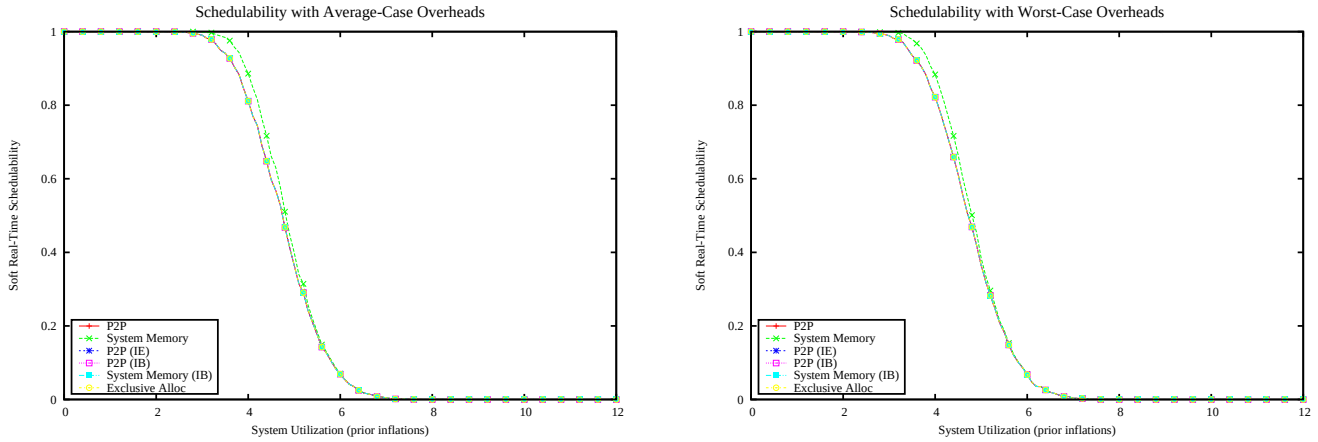

Figure 1194: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

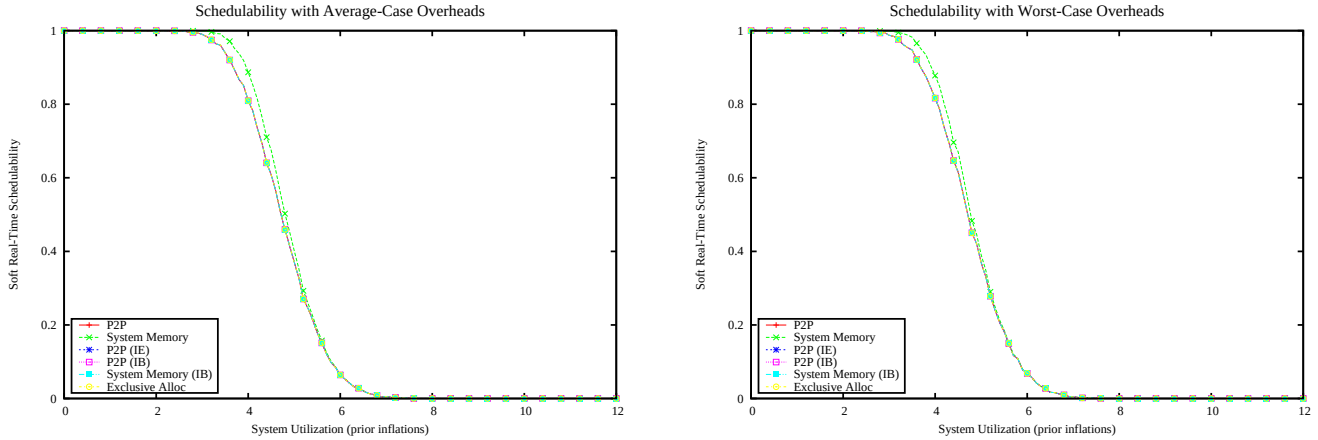

Figure 1195: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

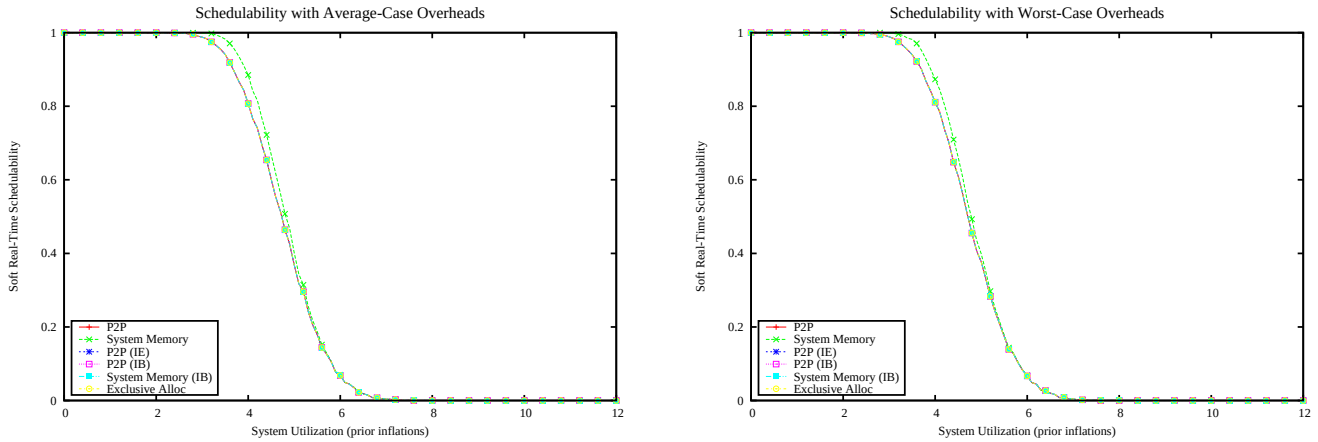

Figure 1196: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

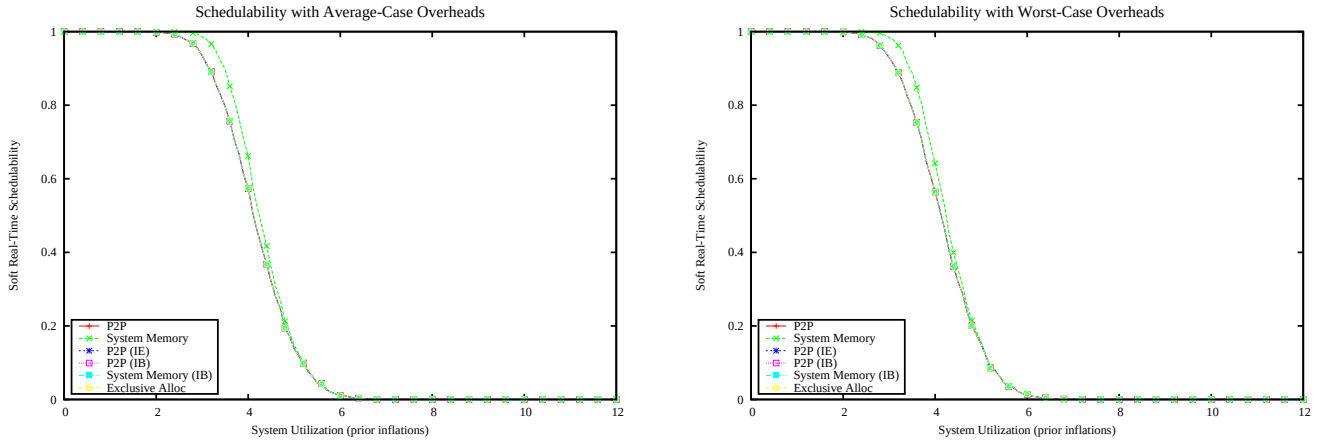

Figure 1197: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

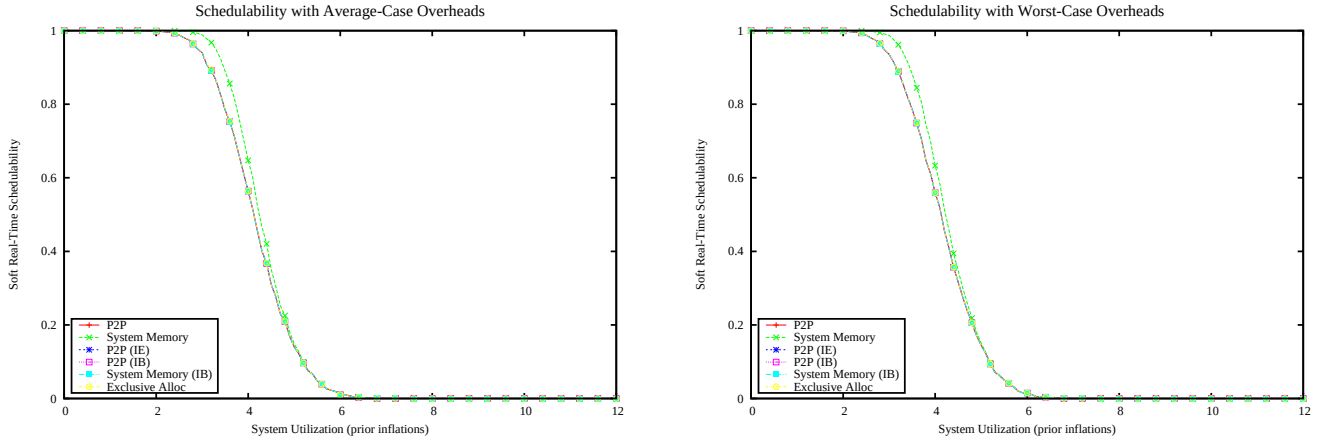

Figure 1198: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

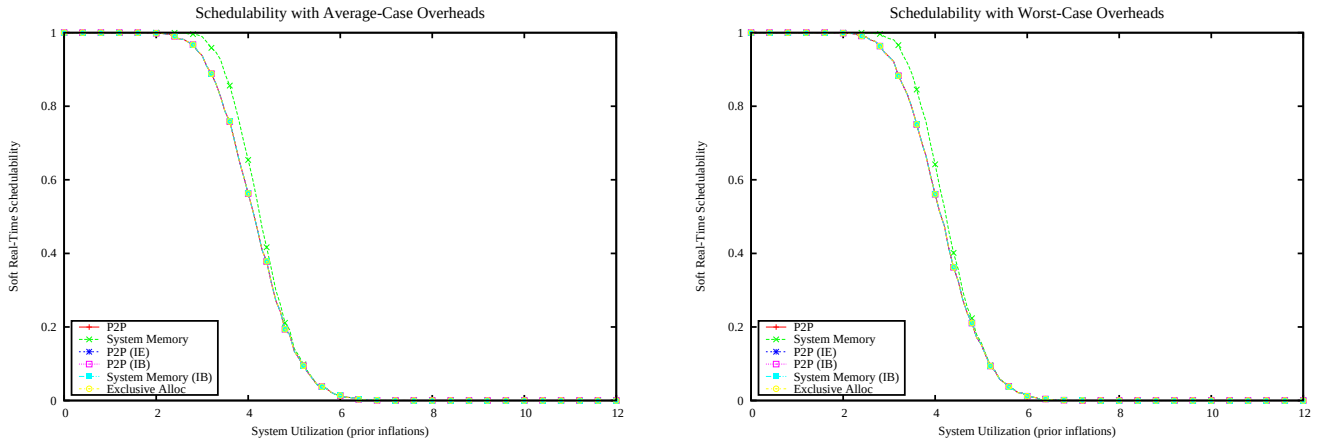

Figure 1199: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

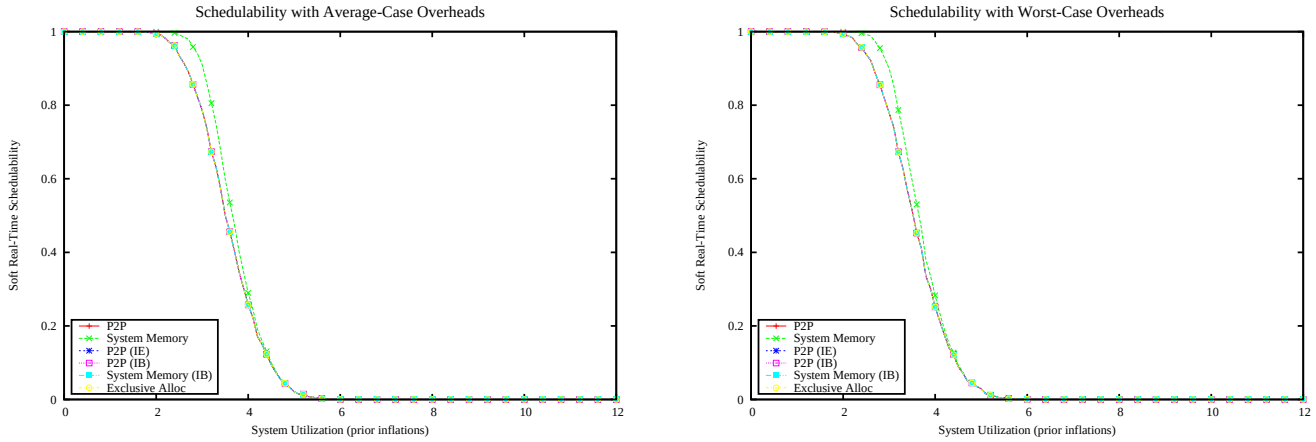

Figure 1200: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

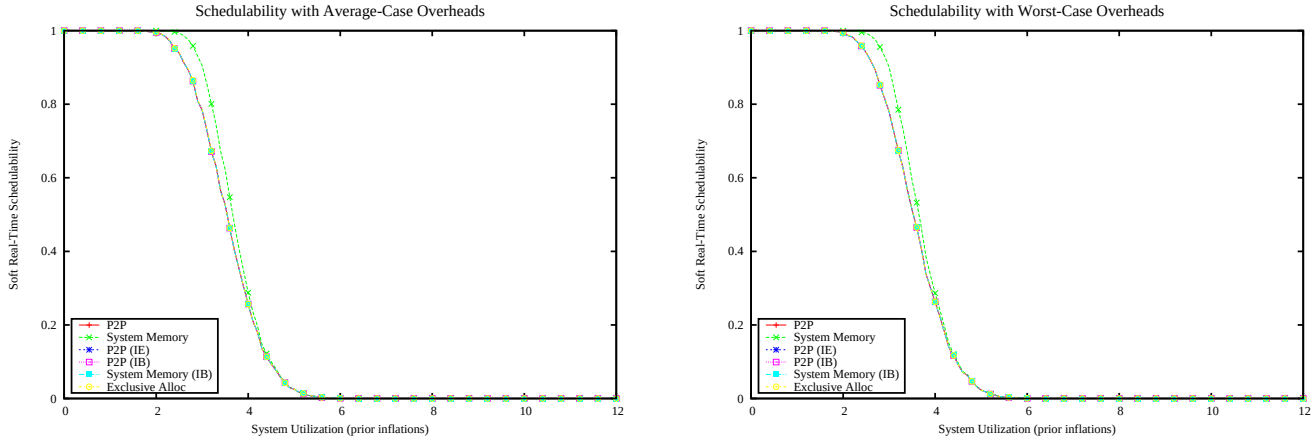

Figure 1201: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

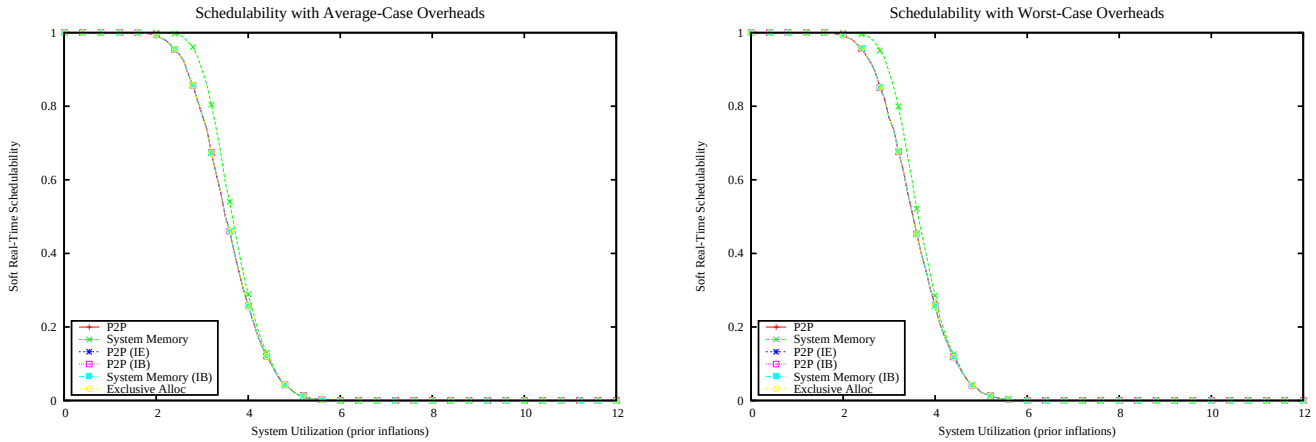

Figure 1202: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

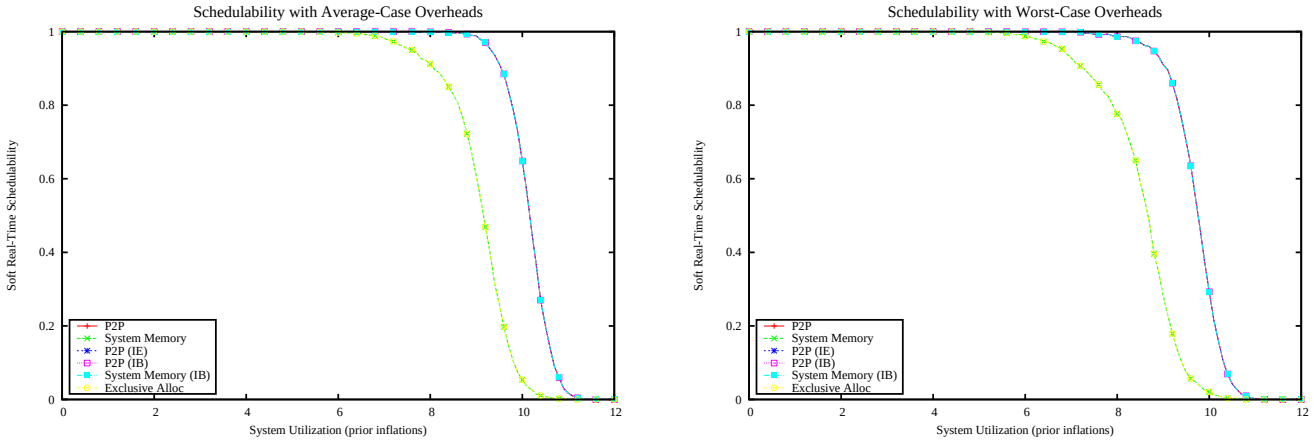

Figure 1203: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

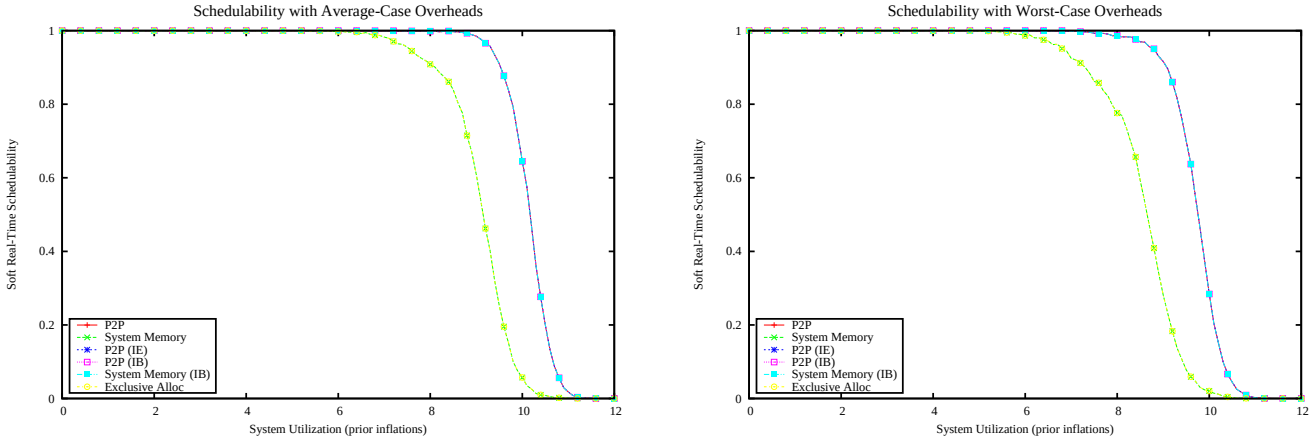

Figure 1204: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

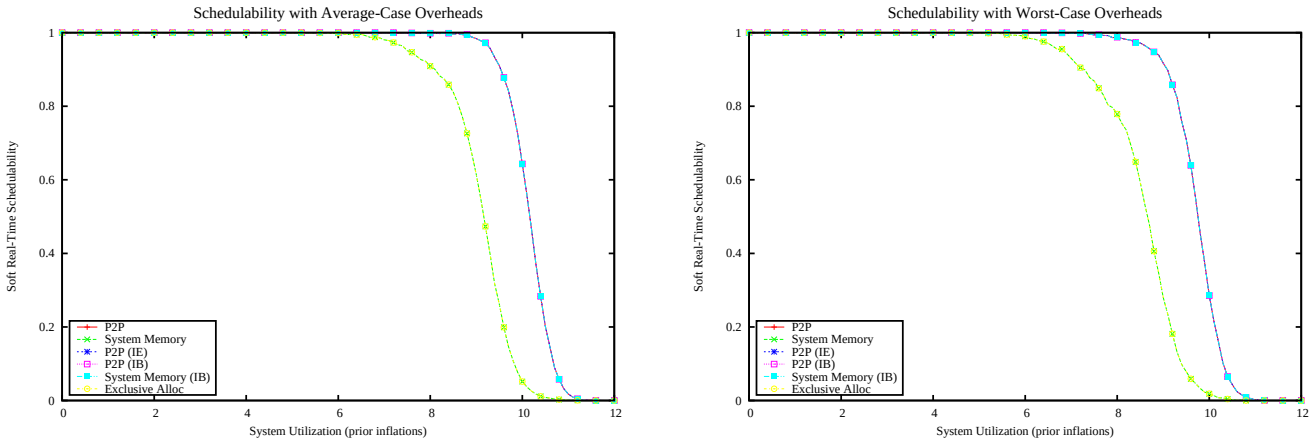

Figure 1205: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

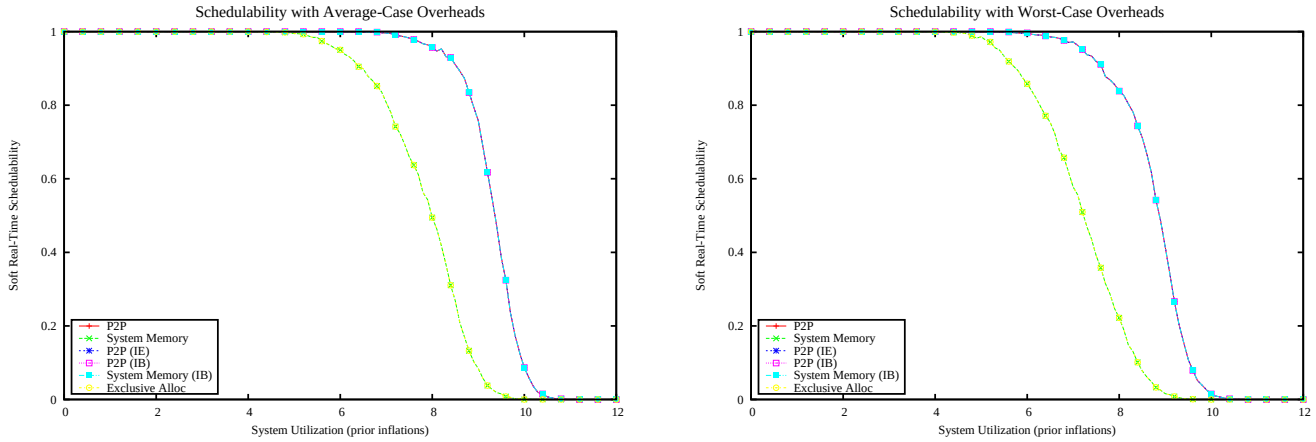

Figure 1206: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

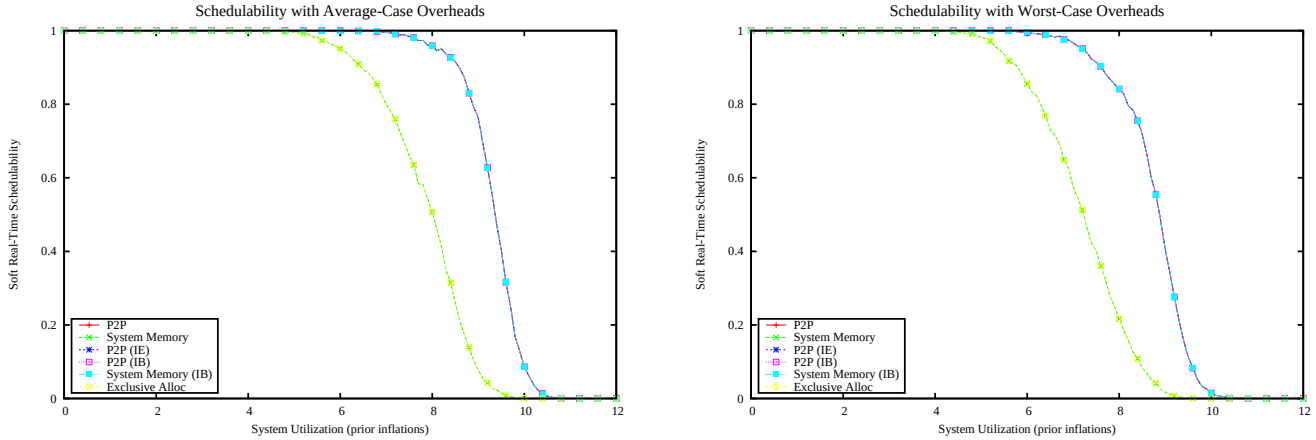

Figure 1207: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

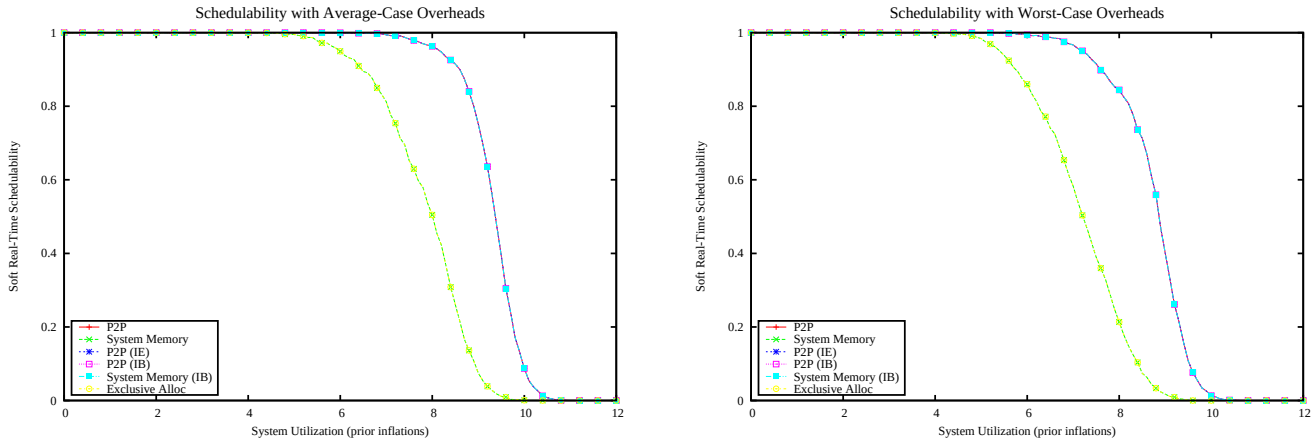

Figure 1208: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

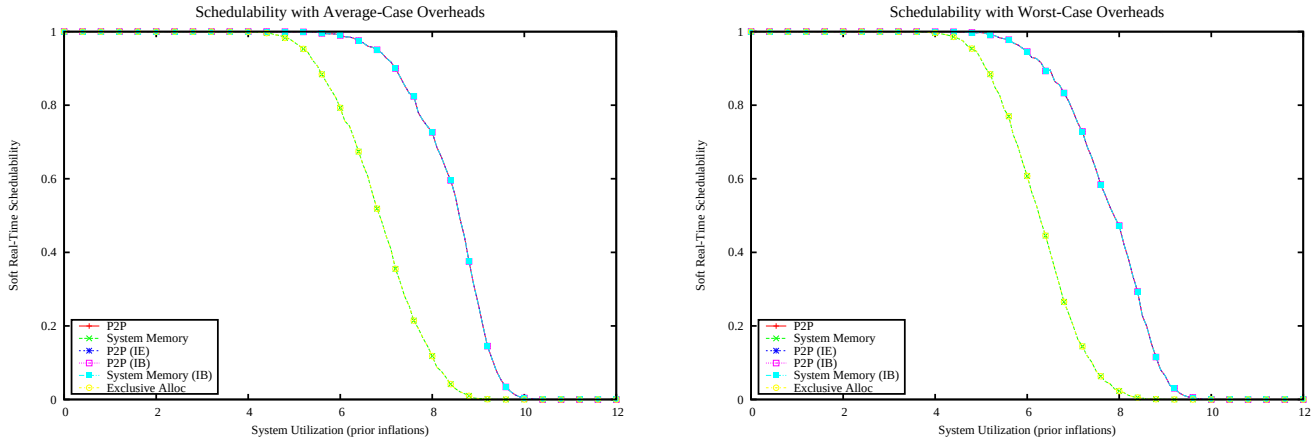

Figure 1209: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

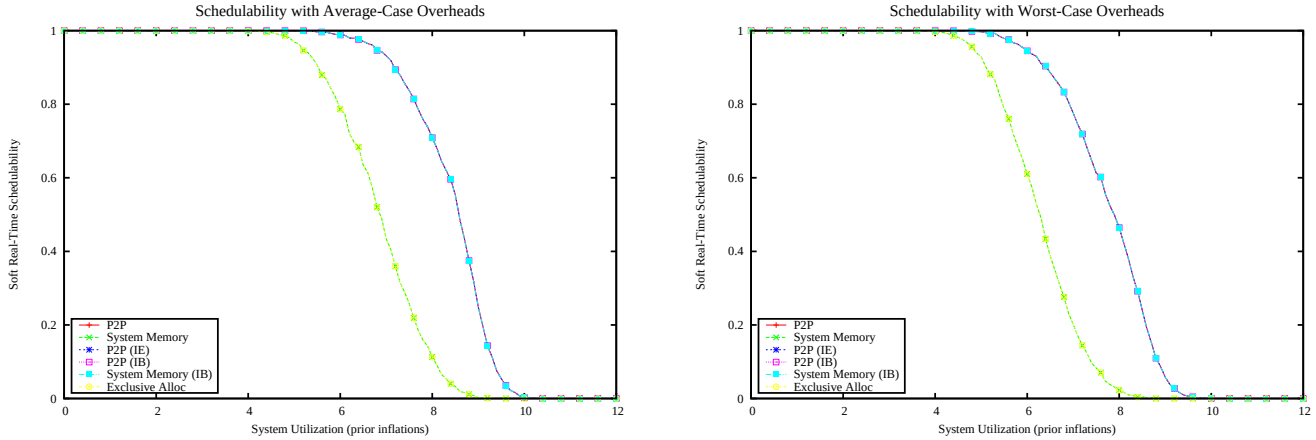

Figure 1210: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

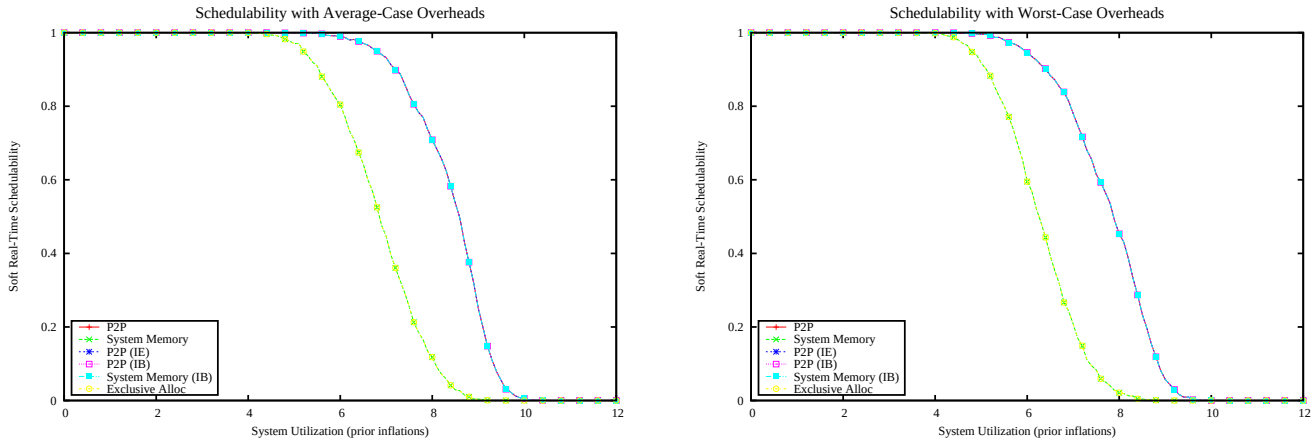

Figure 1211: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

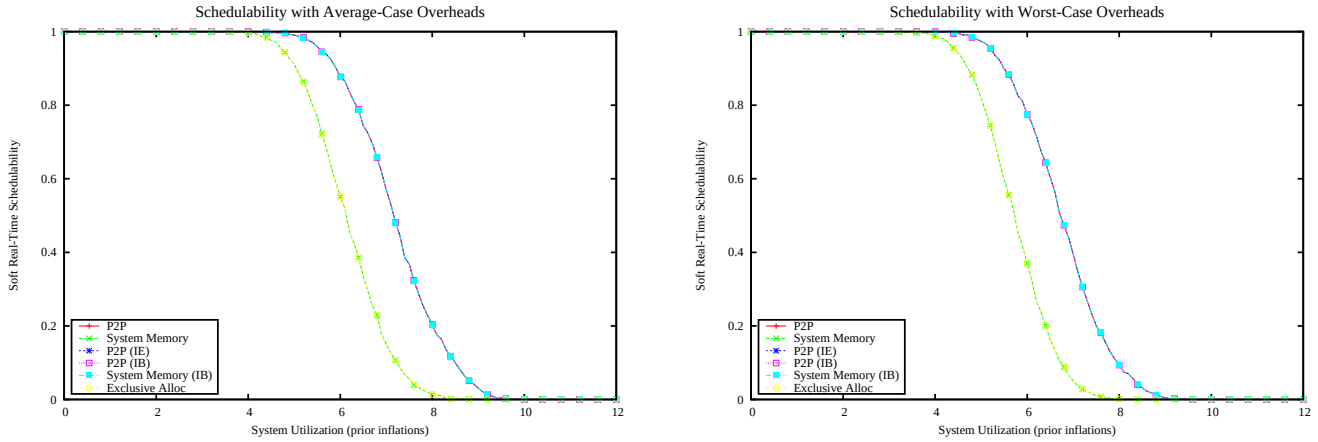

Figure 1212: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

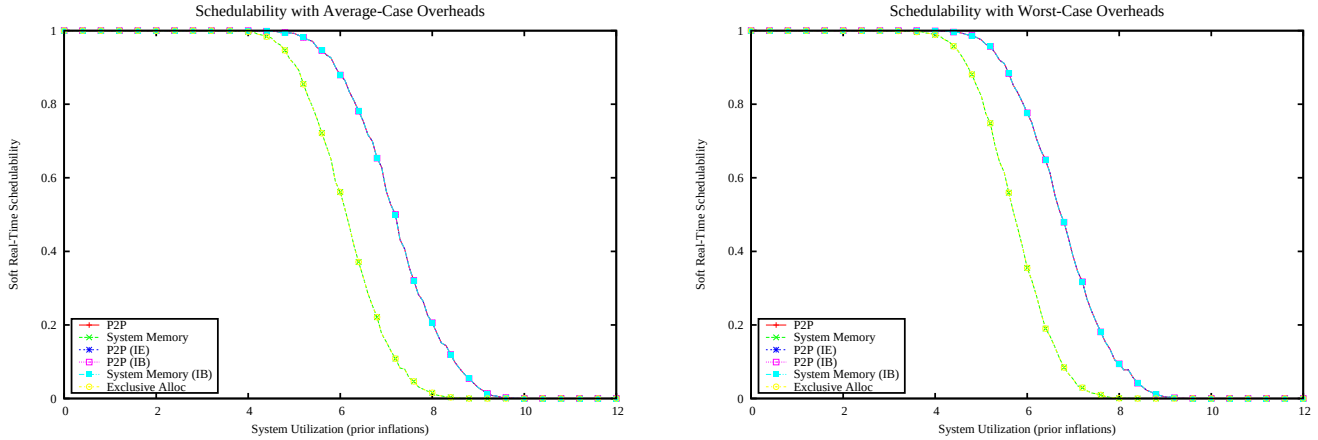

Figure 1213: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

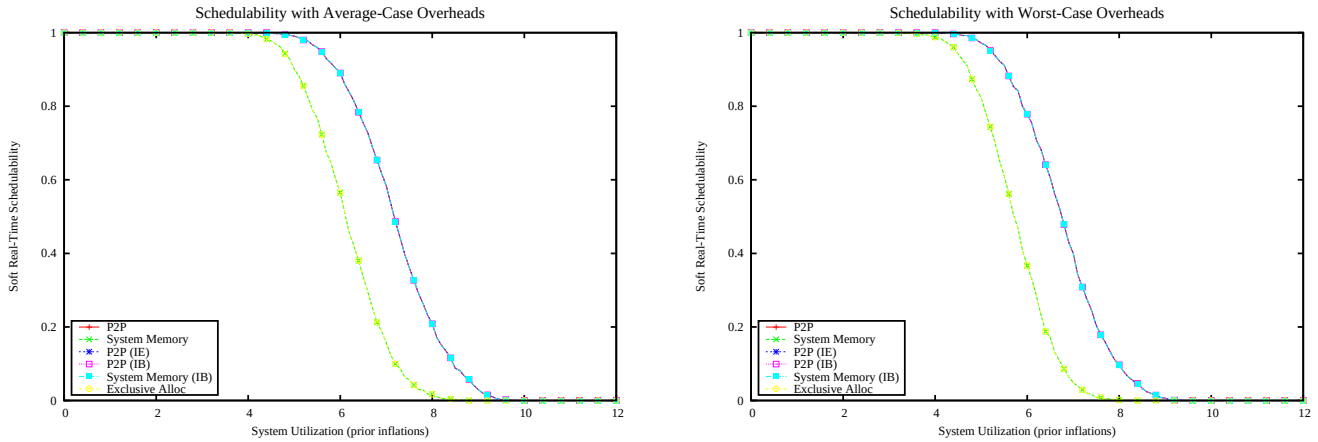

Figure 1214: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

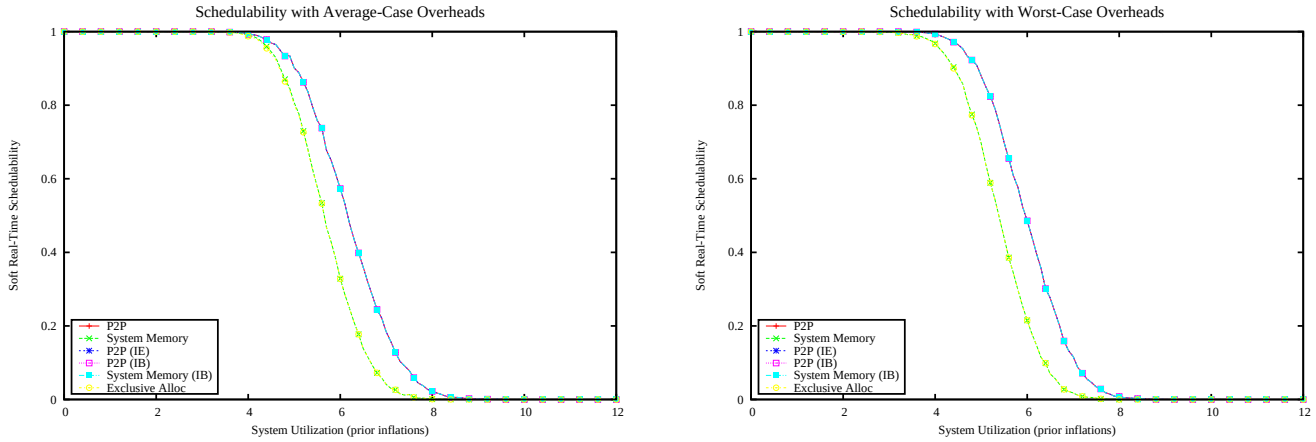

Figure 1215: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

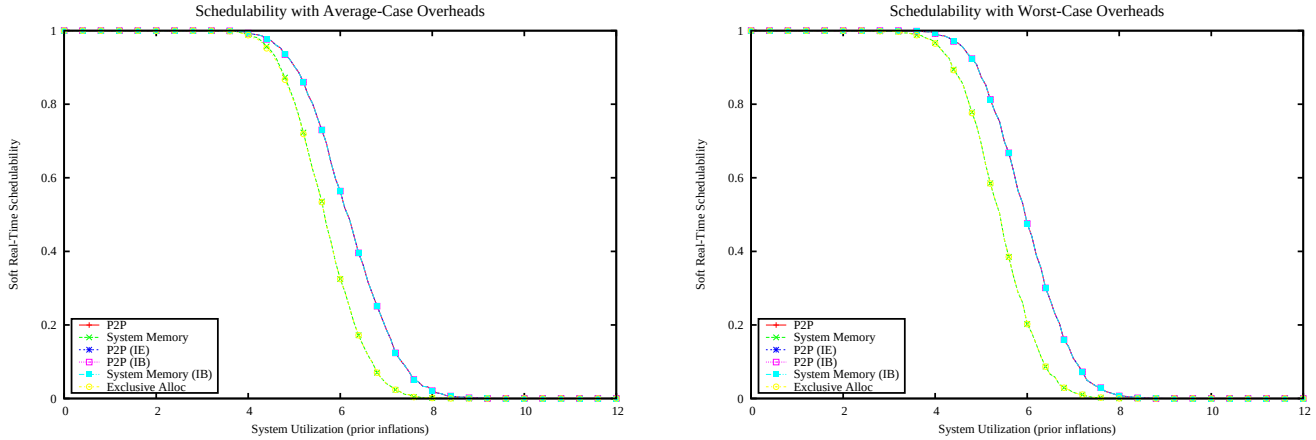

Figure 1216: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

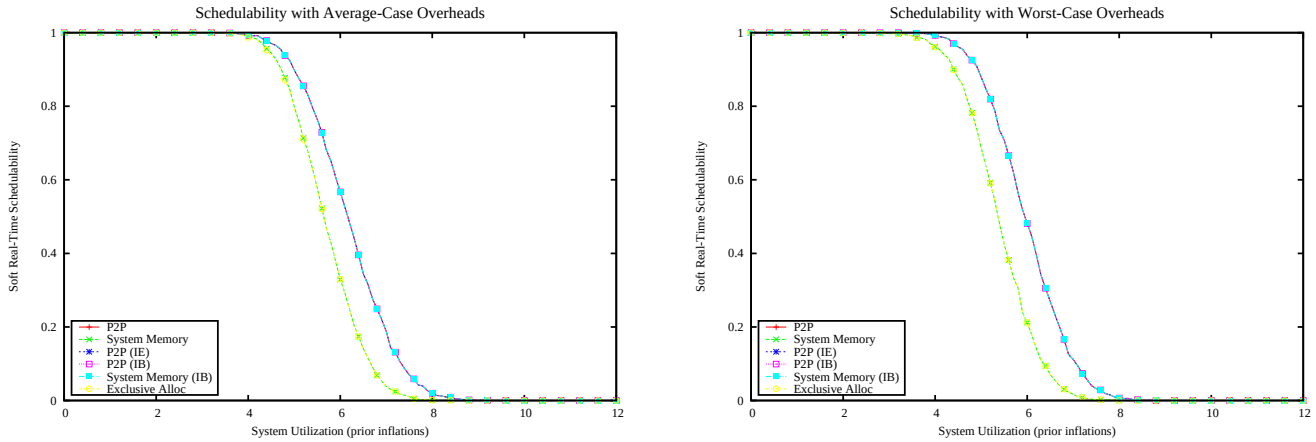

Figure 1217: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

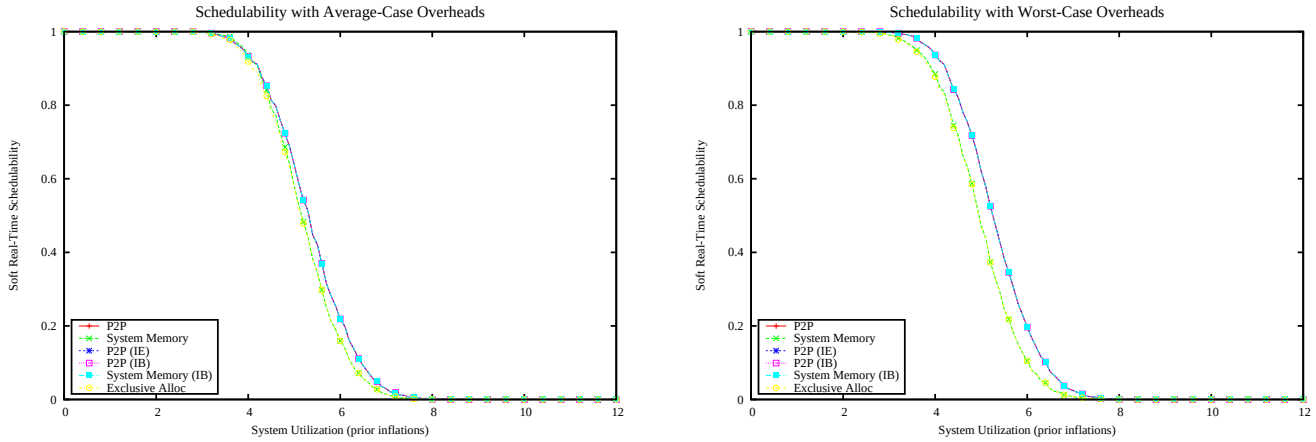

Figure 1218: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

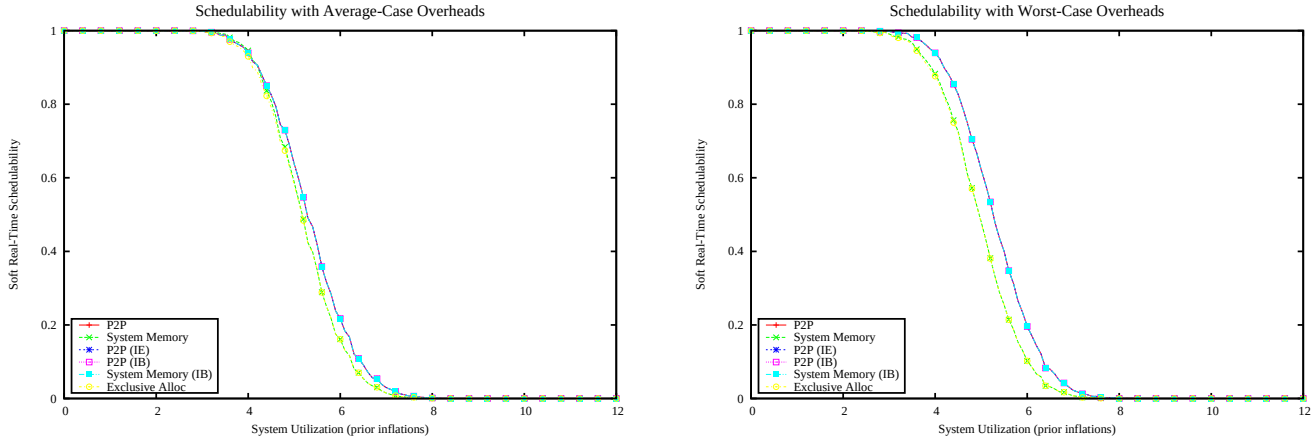

Figure 1219: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

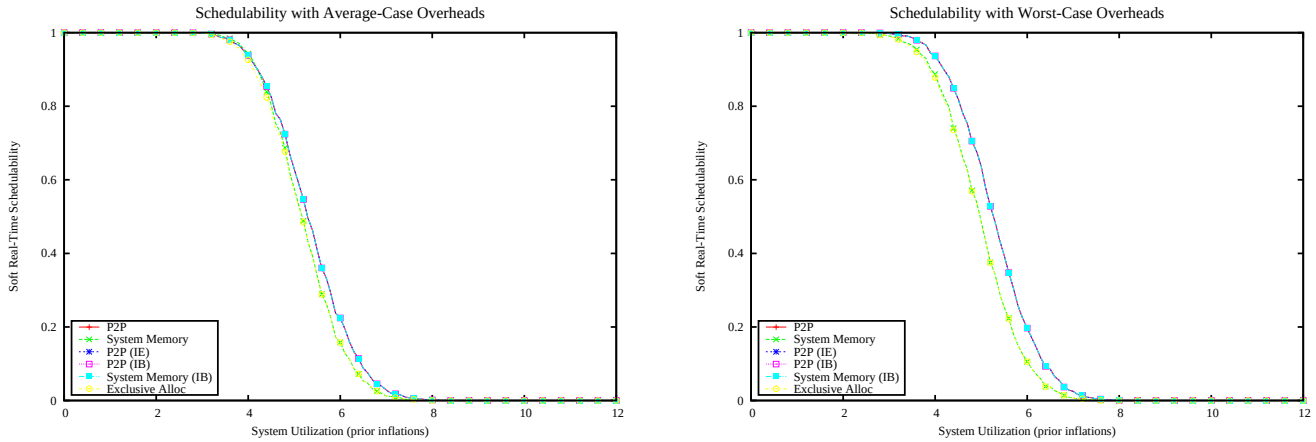

Figure 1220: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

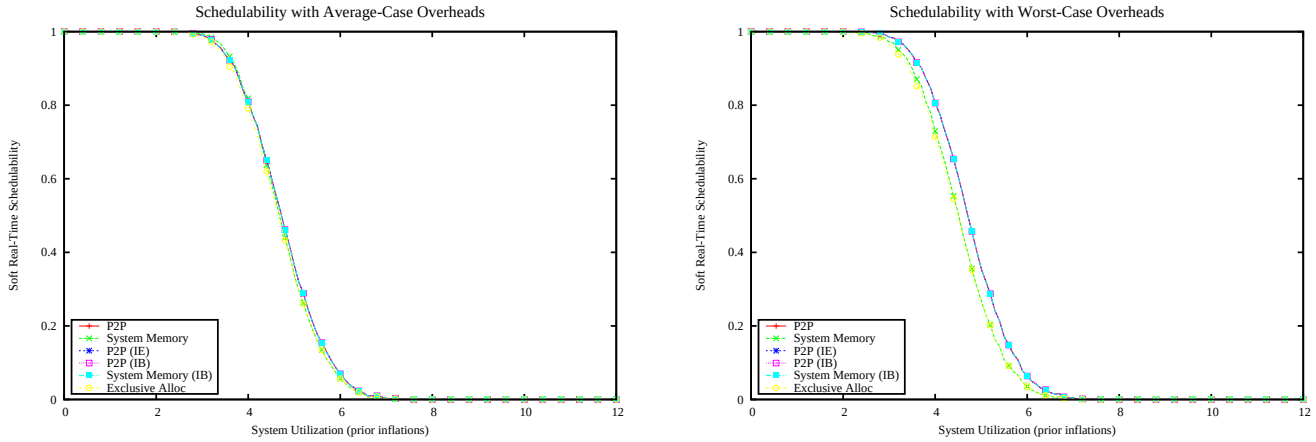

Figure 1221: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

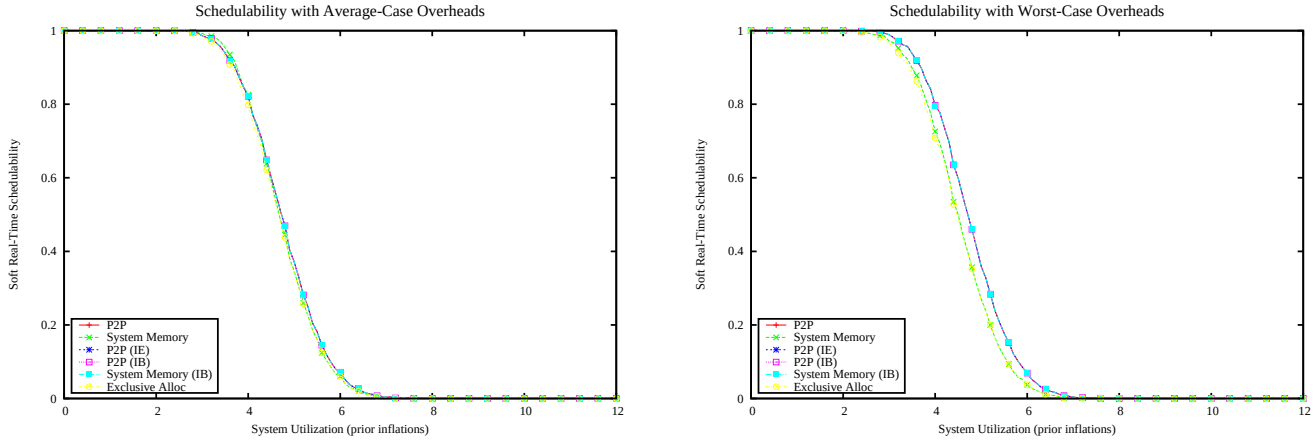

Figure 1222: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

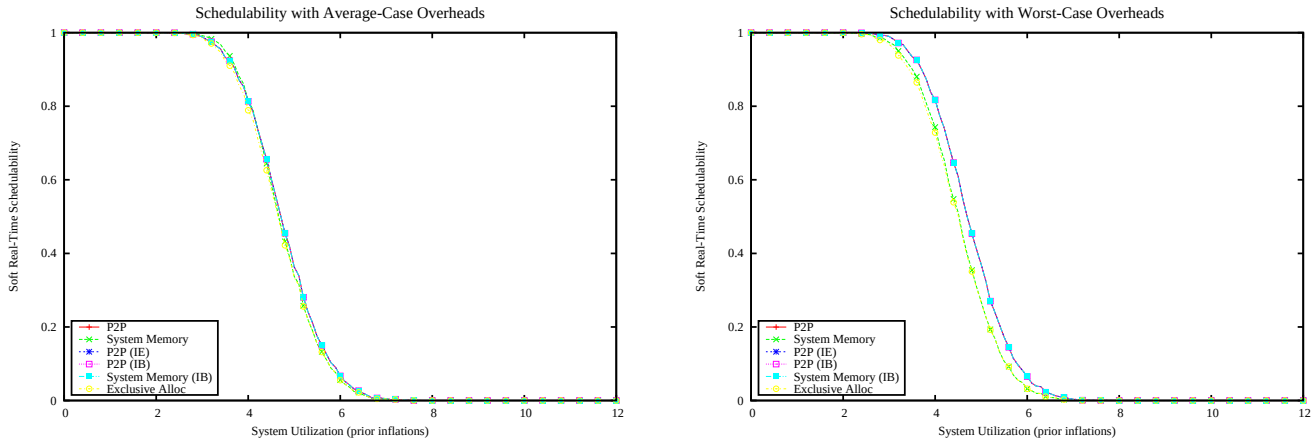

Figure 1223: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

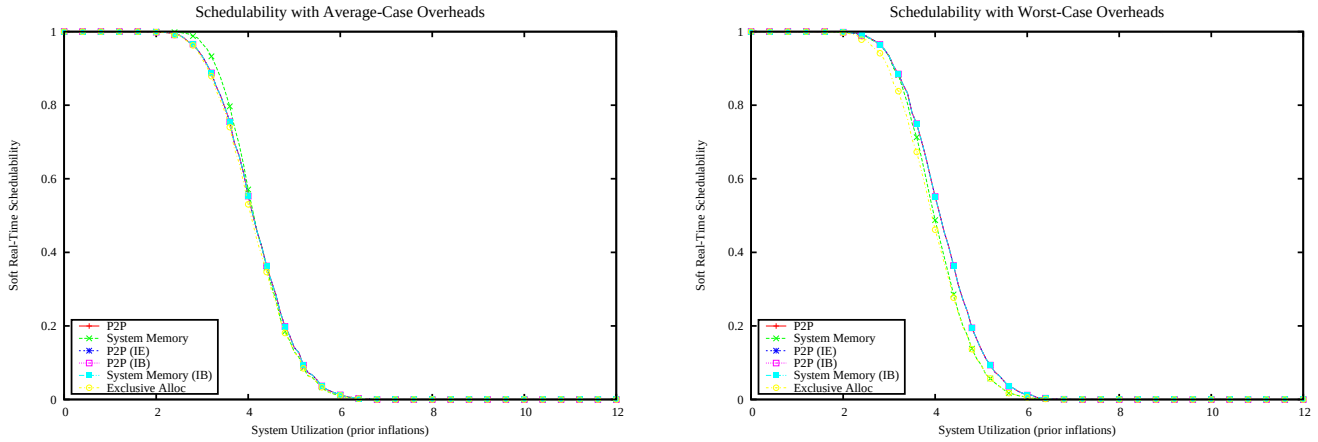

Figure 1224: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

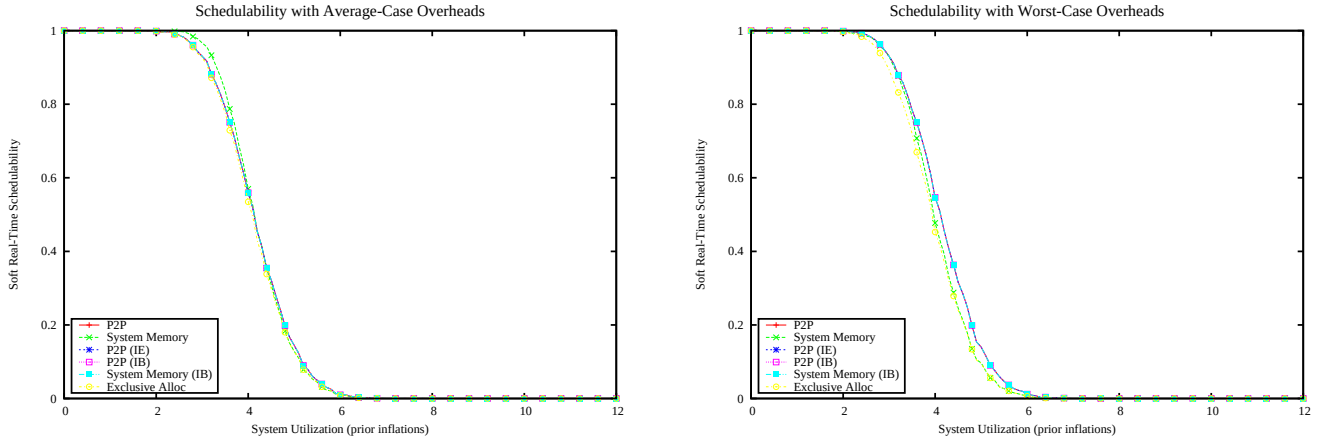

Figure 1225: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

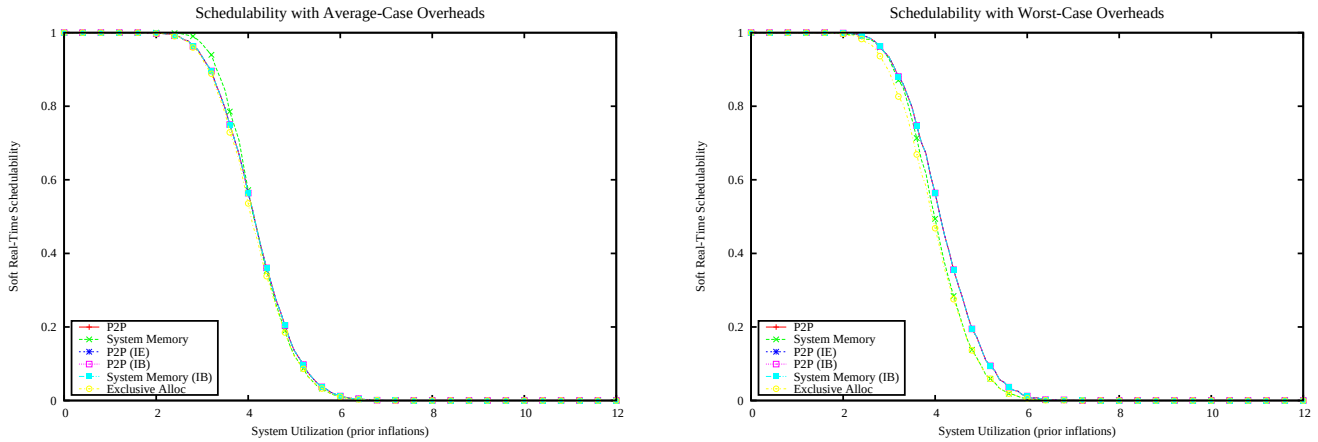

Figure 1226: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

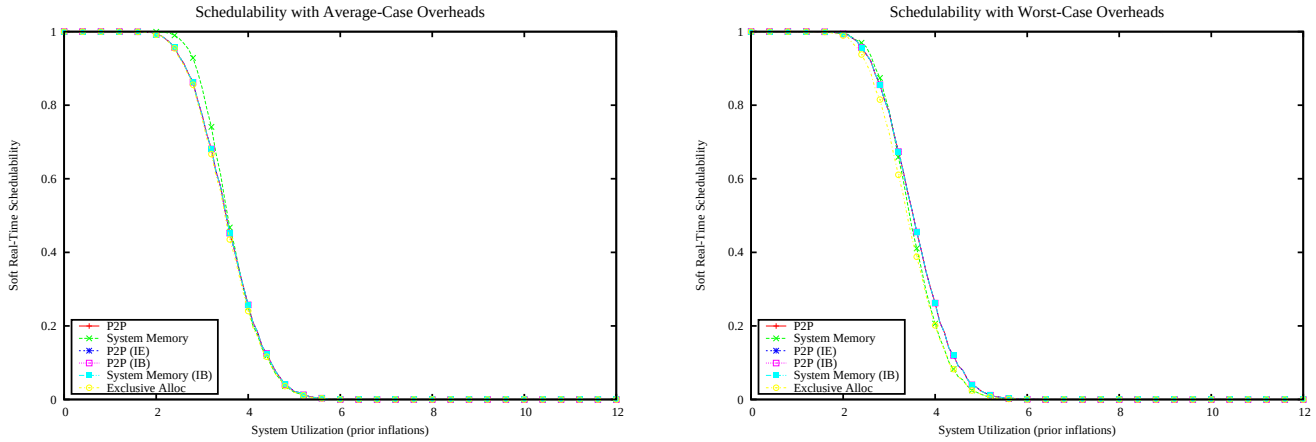

Figure 1227: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

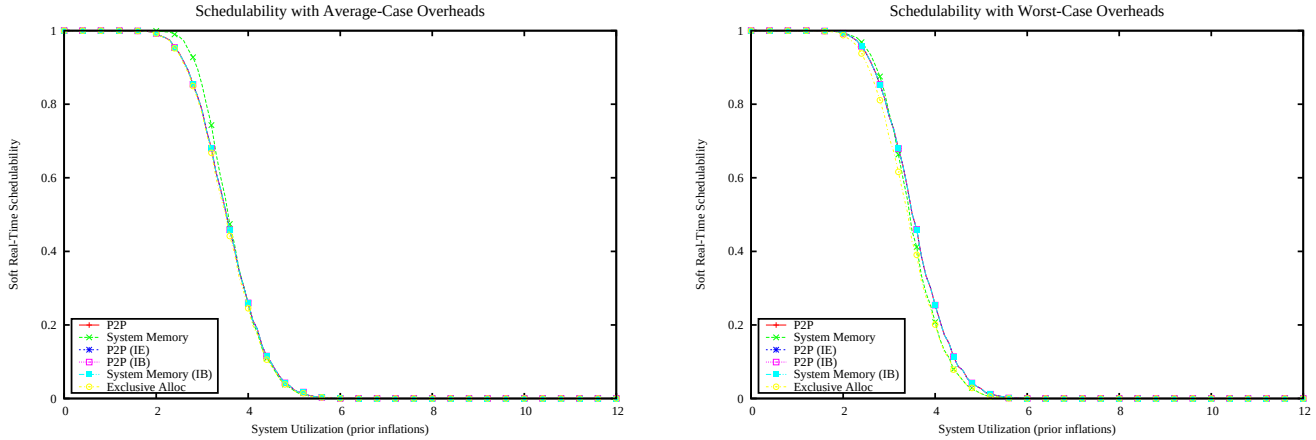

Figure 1228: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

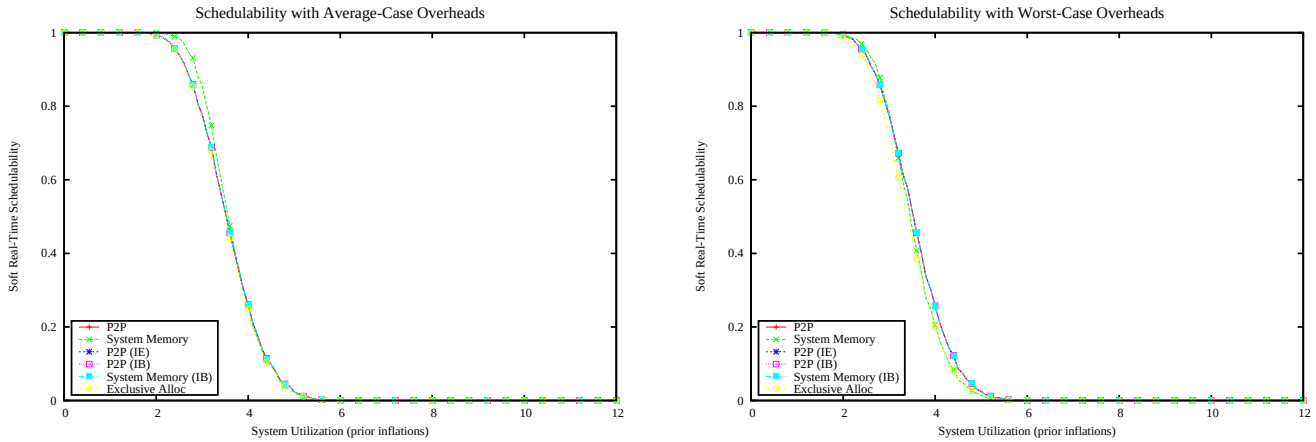

Figure 1229: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

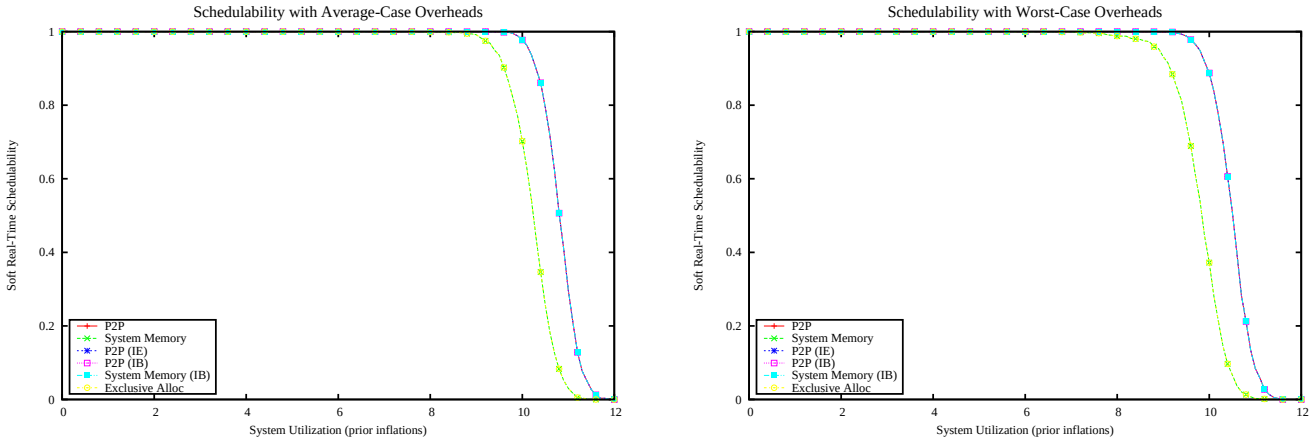

Figure 1230: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

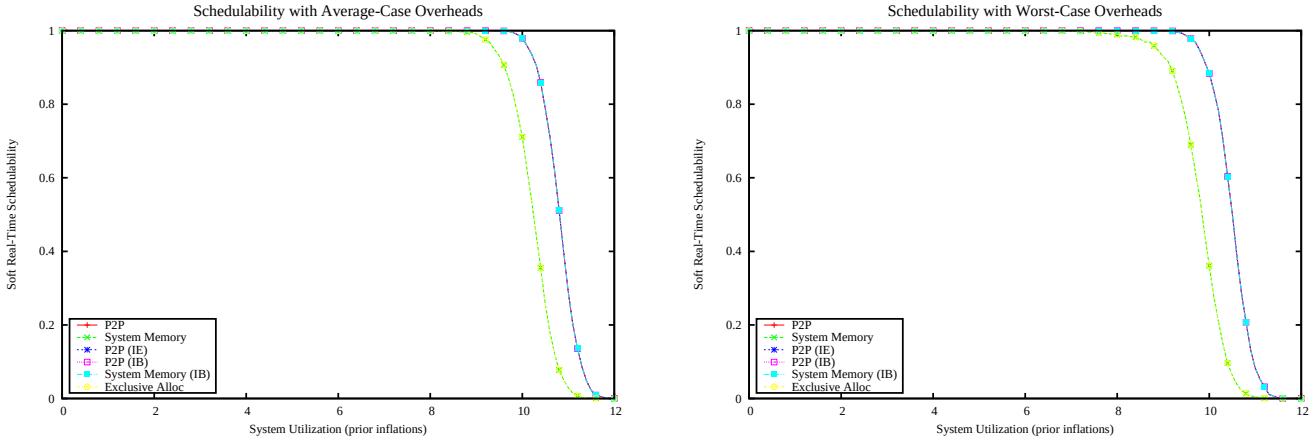

Figure 1231: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

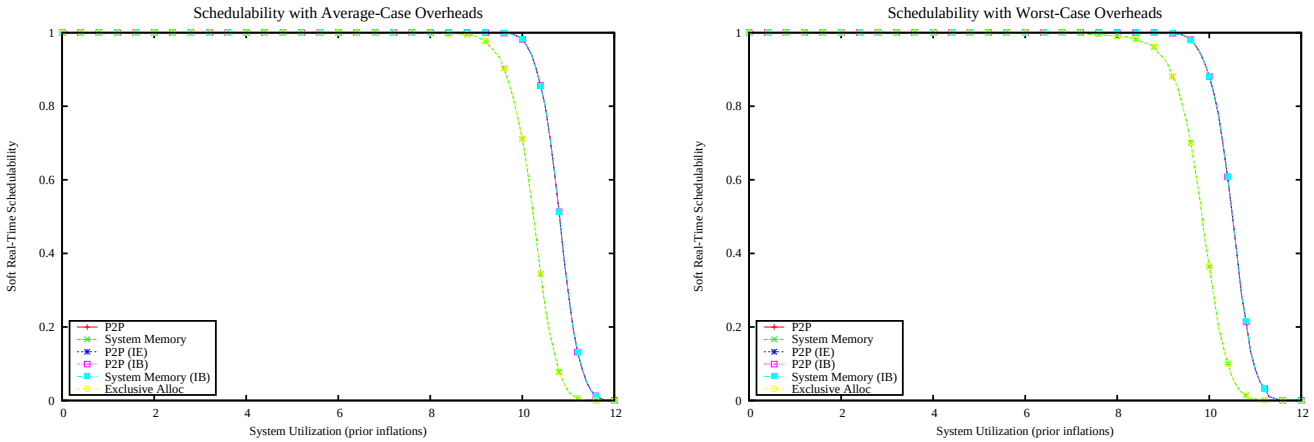

Figure 1232: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

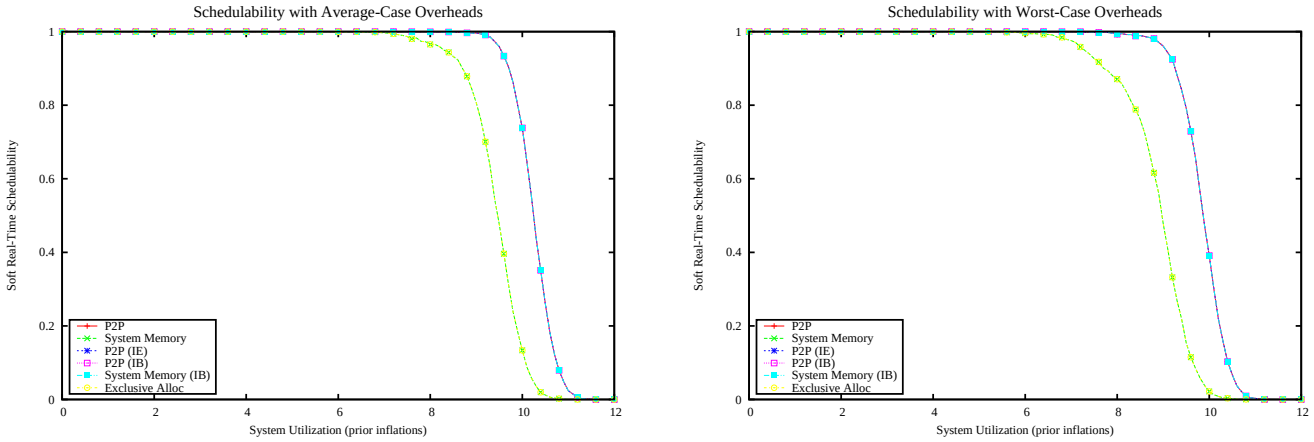

Figure 1233: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

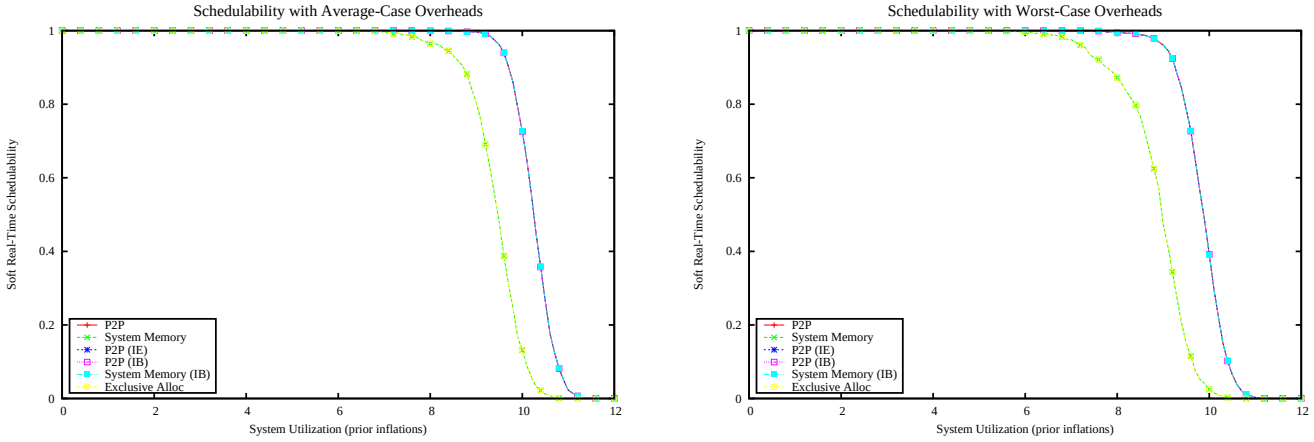

Figure 1234: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

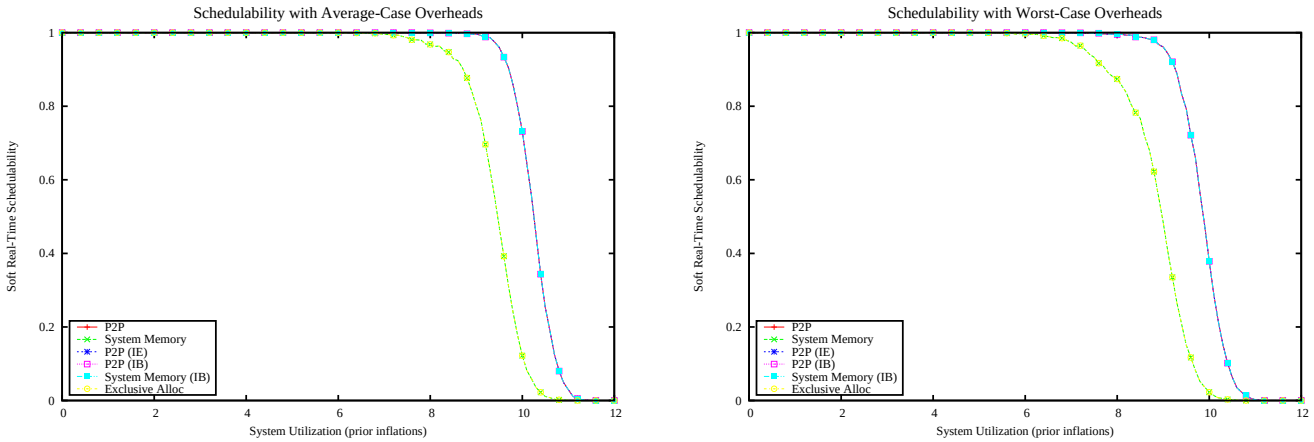

Figure 1235: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

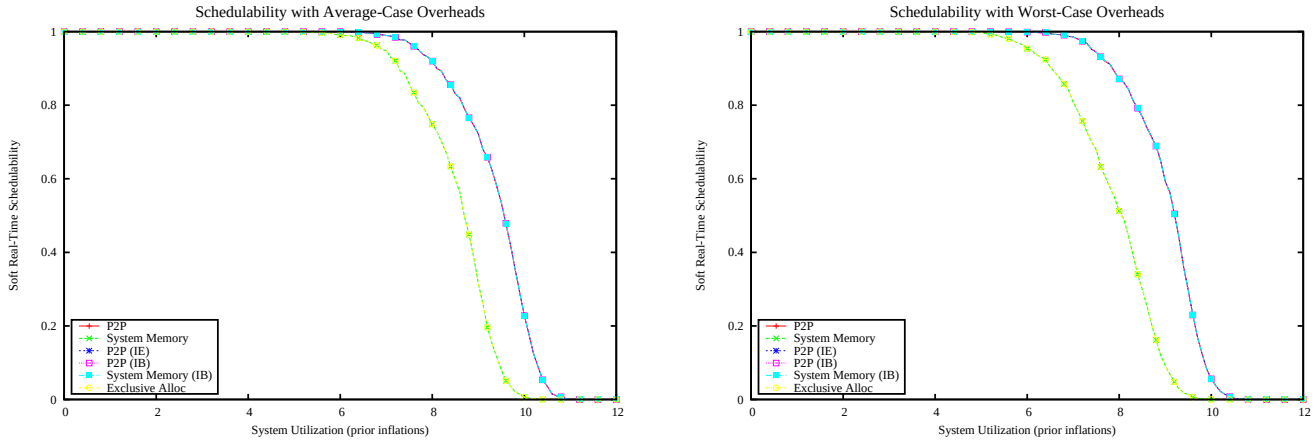

Figure 1236: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

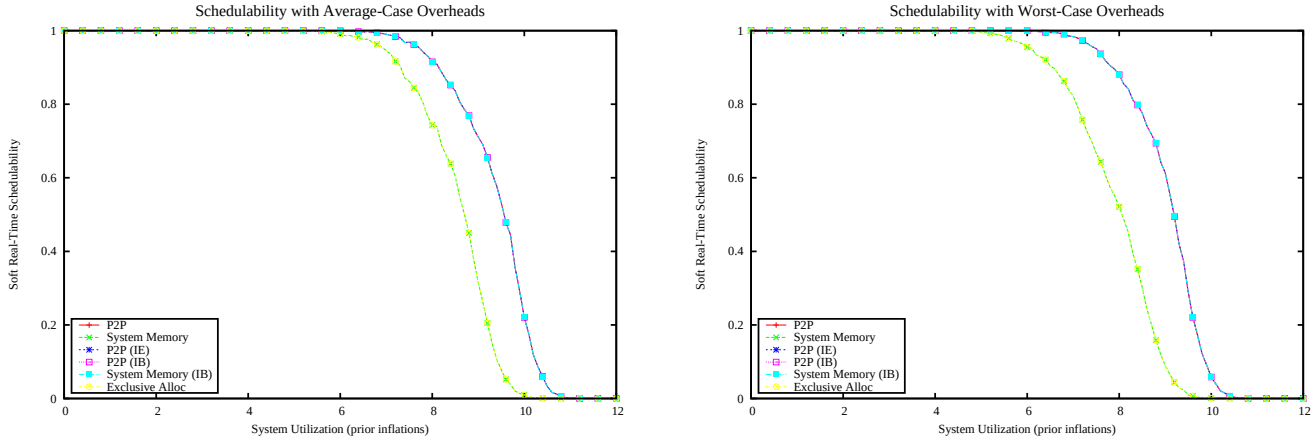

Figure 1237: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

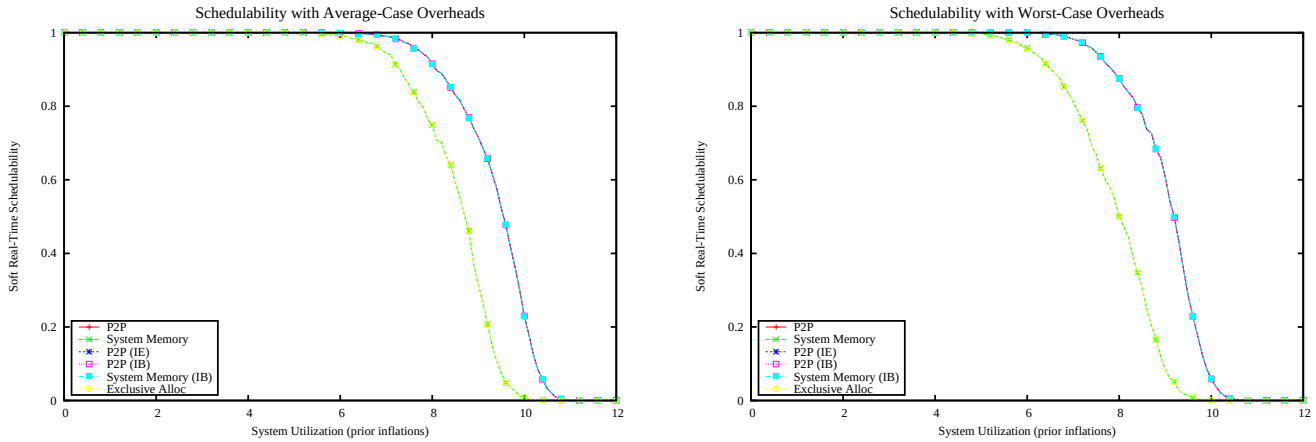

Figure 1238: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

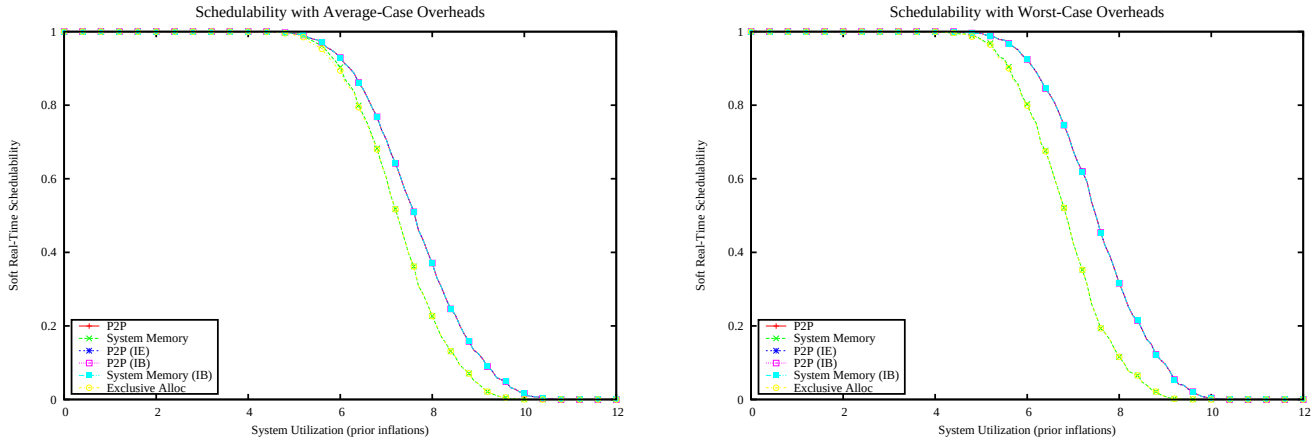

Figure 1239: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

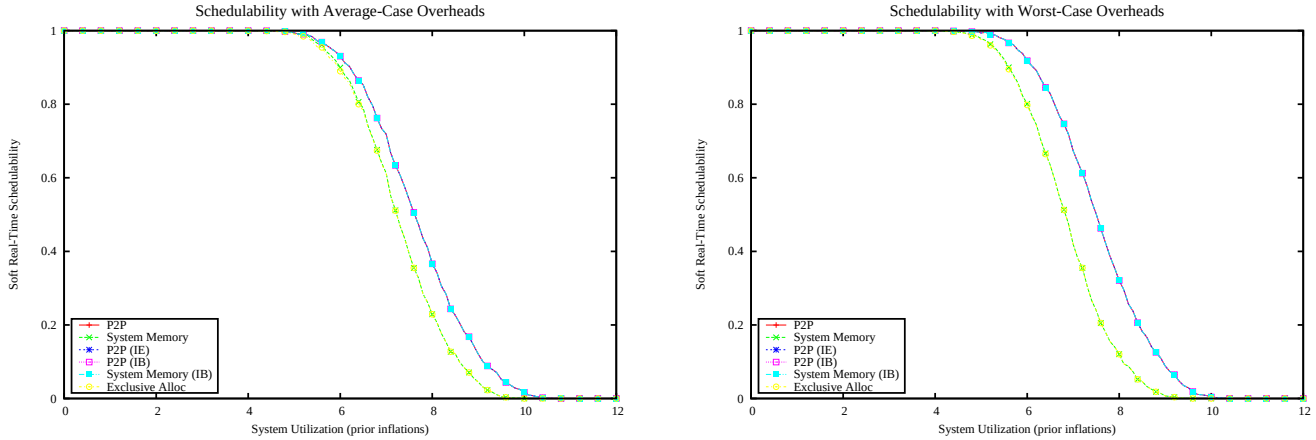

Figure 1240: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

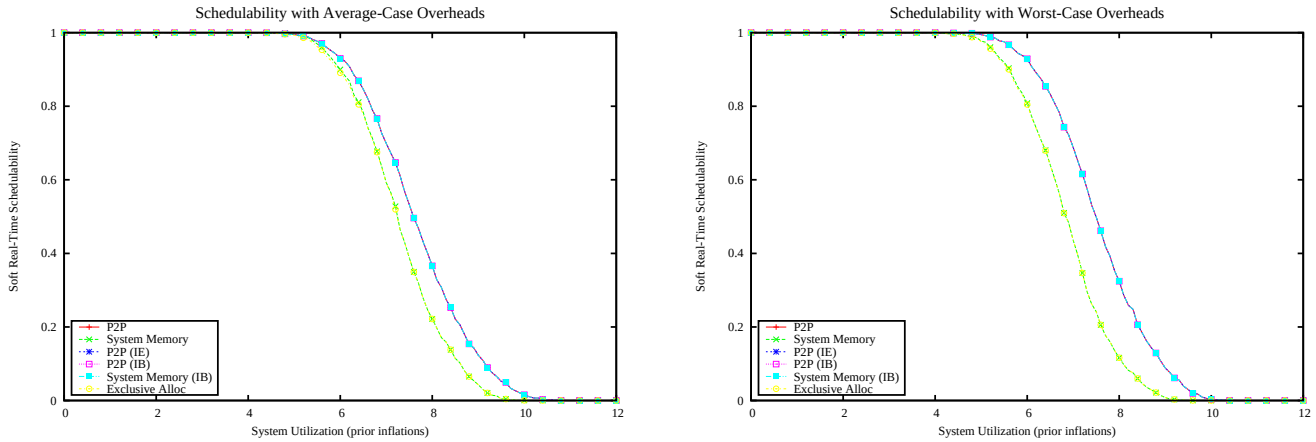

Figure 1241: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

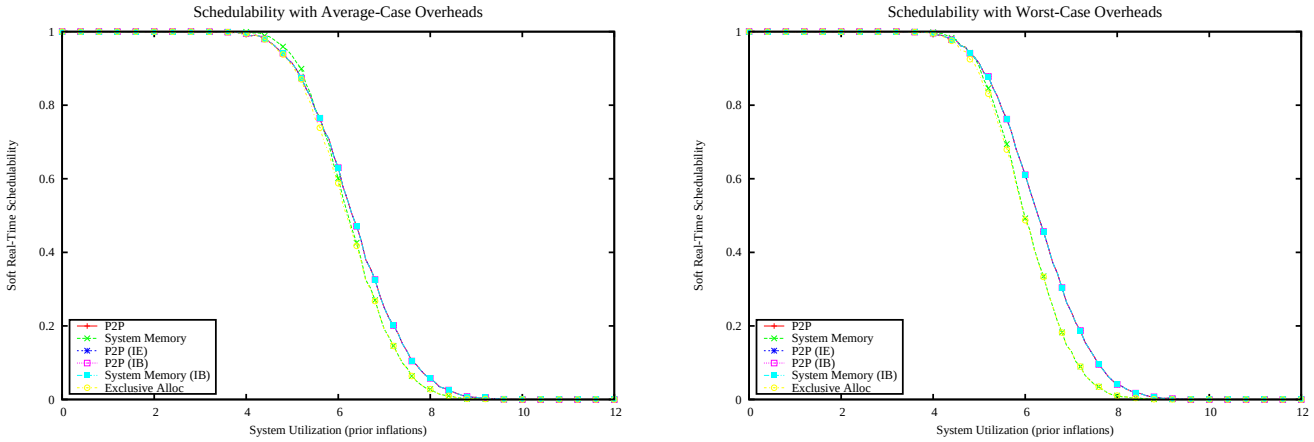

Figure 1242: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

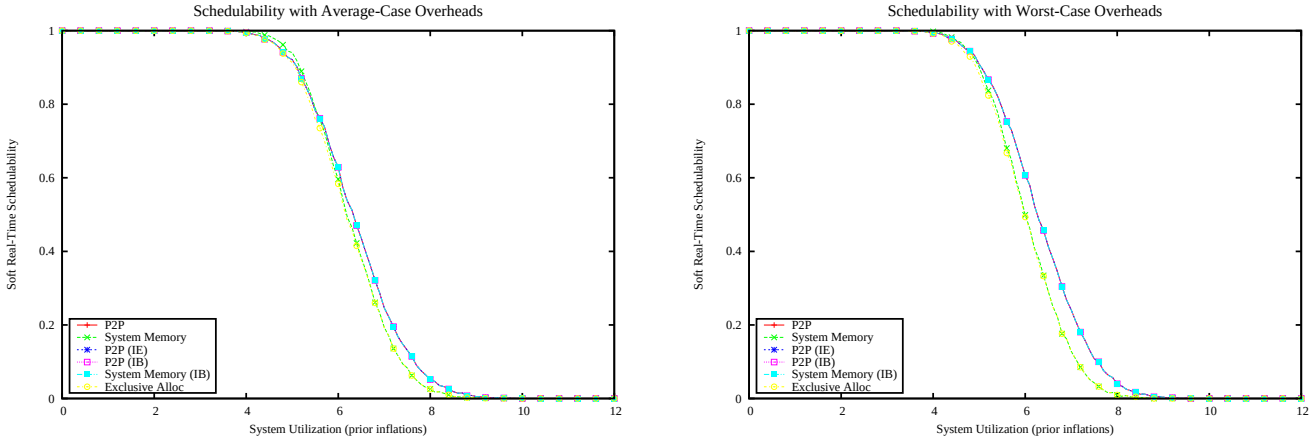

Figure 1243: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

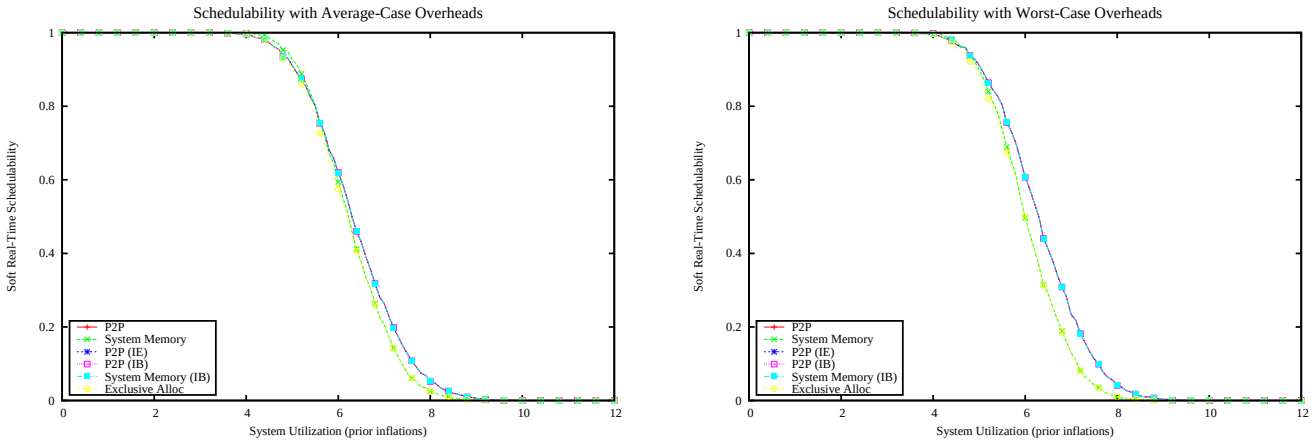

Figure 1244: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

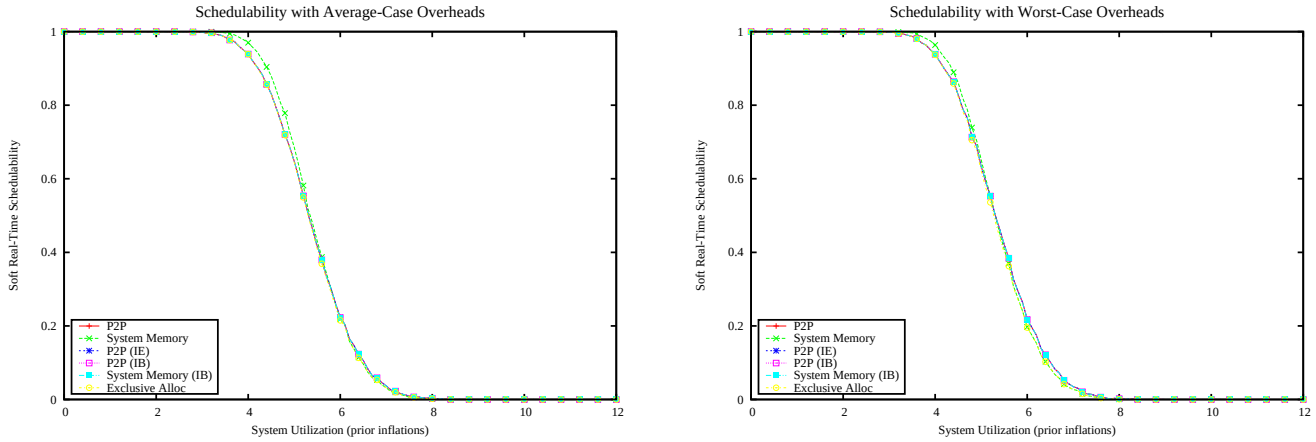

Figure 1245: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

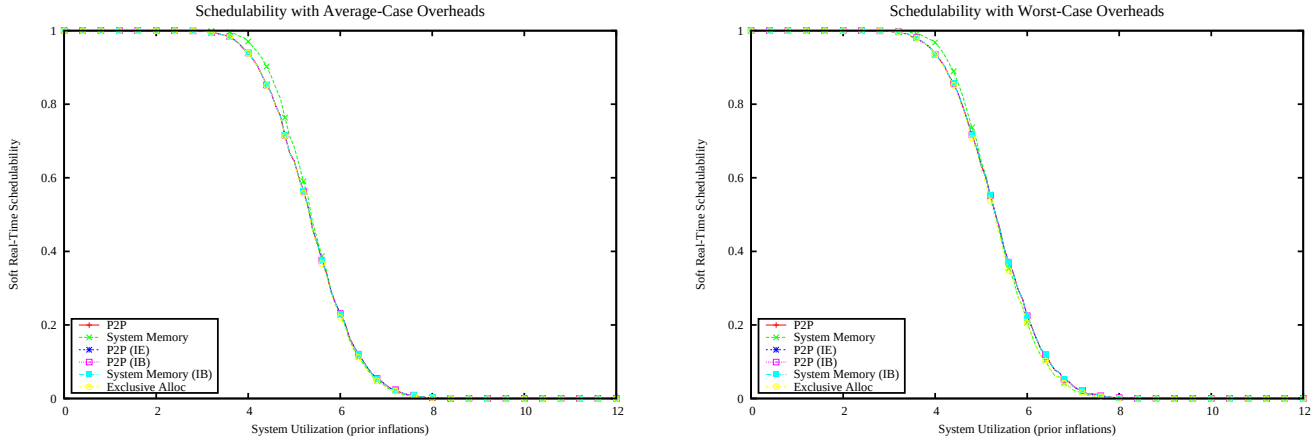

Figure 1246: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

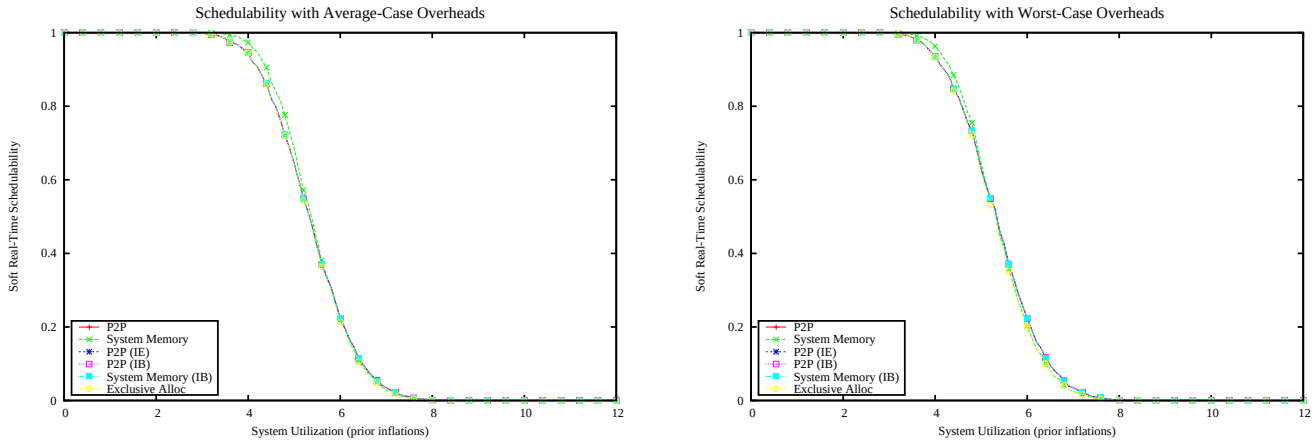

Figure 1247: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

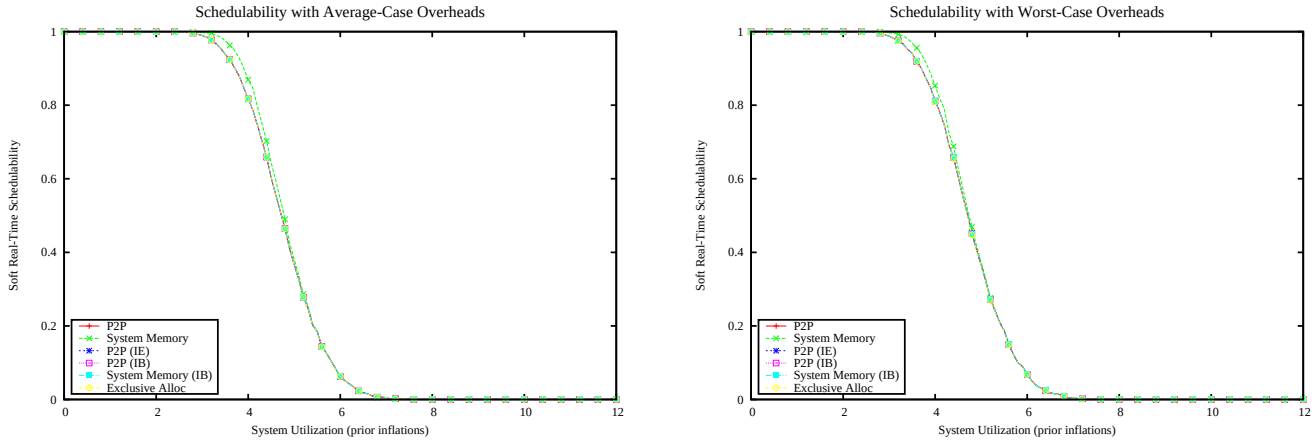

Figure 1248: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

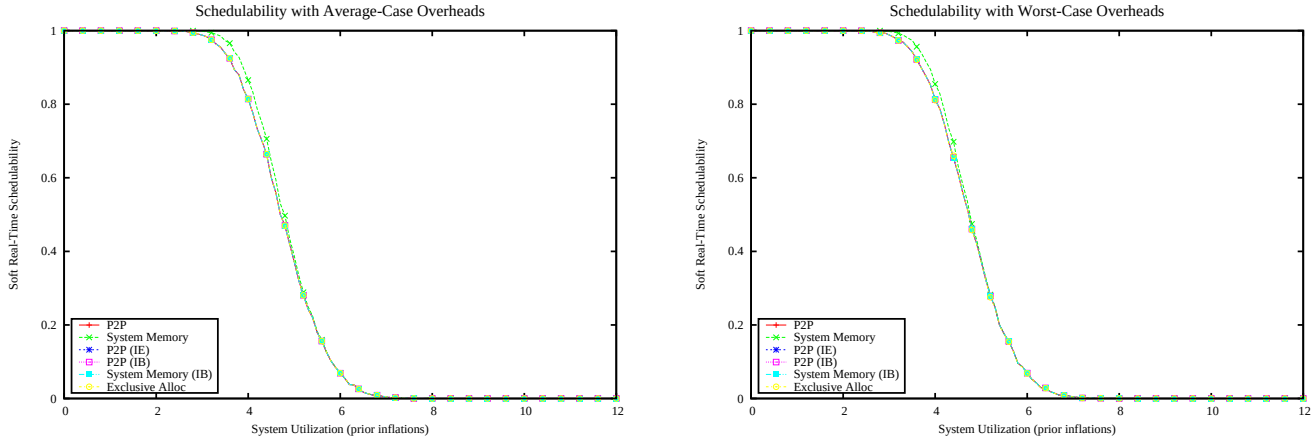

Figure 1249: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

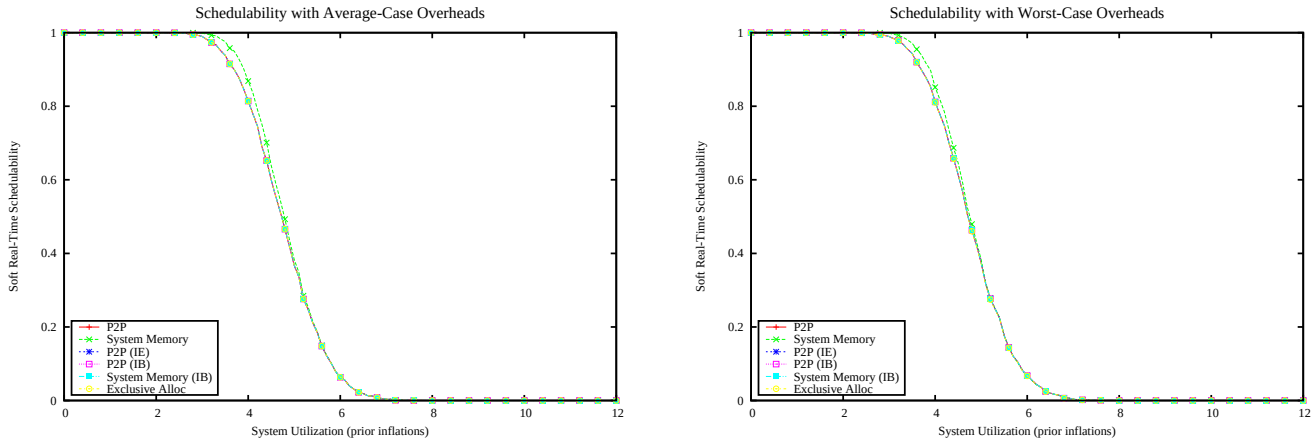

Figure 1250: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

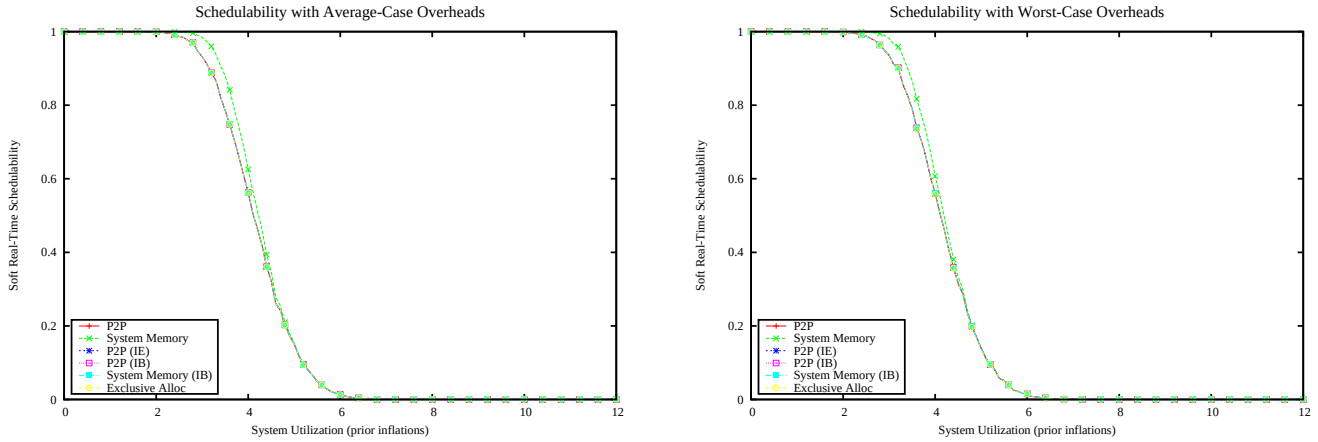

Figure 1251: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

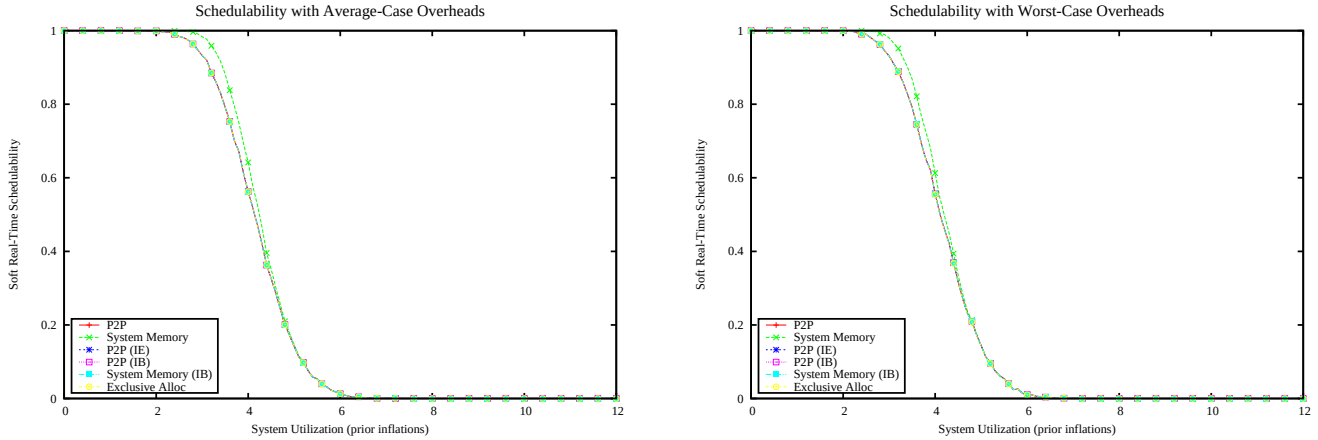

Figure 1252: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

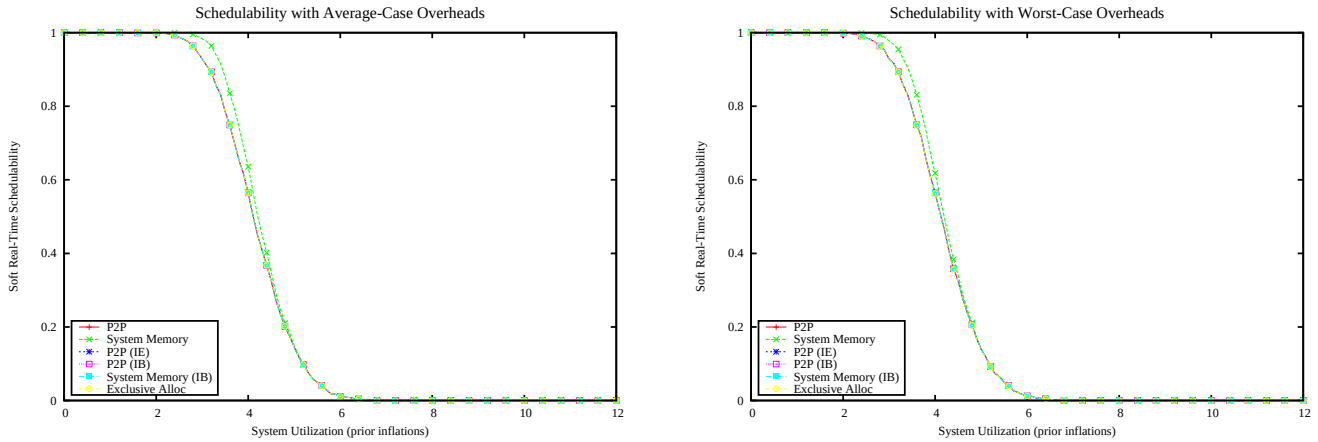

Figure 1253: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

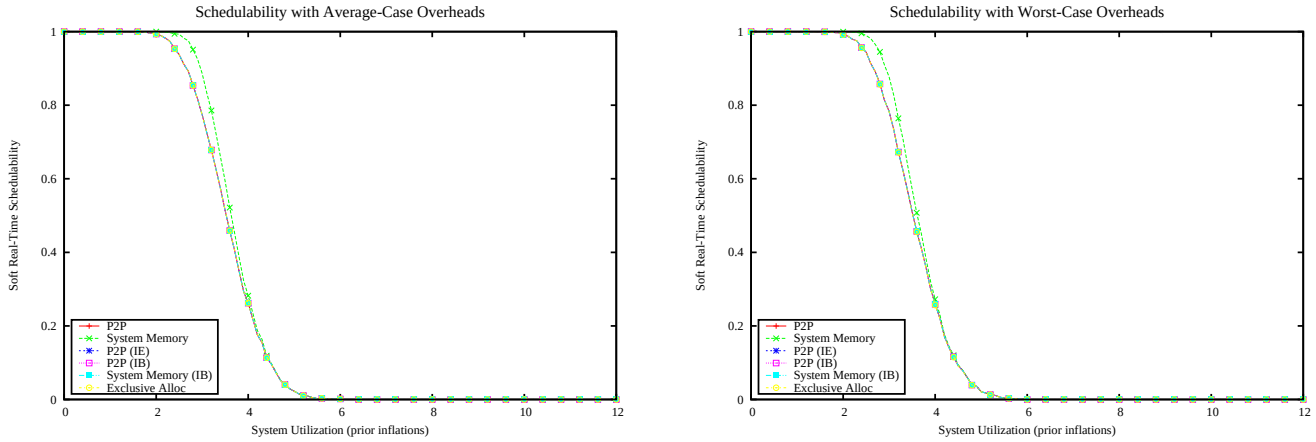

Figure 1254: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

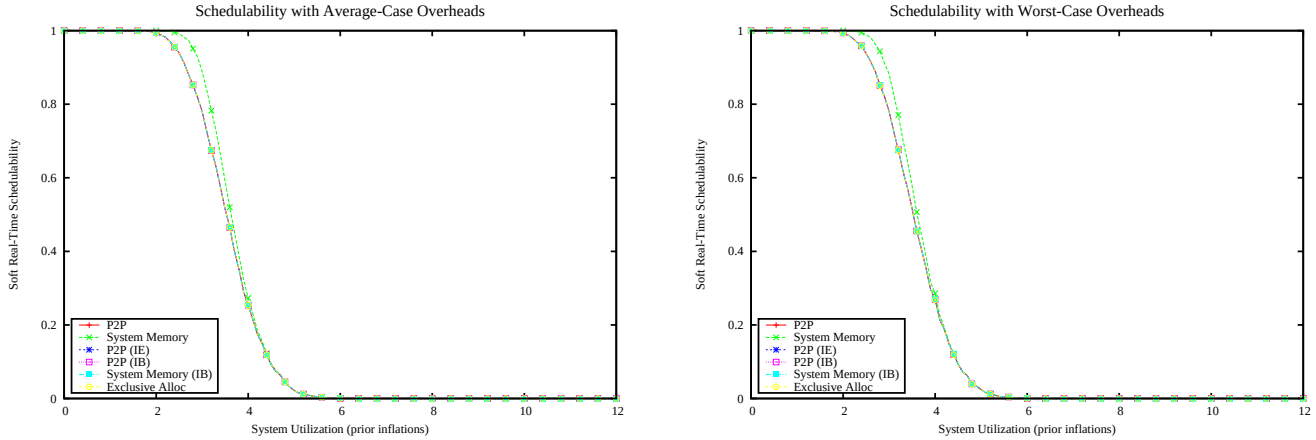

Figure 1255: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

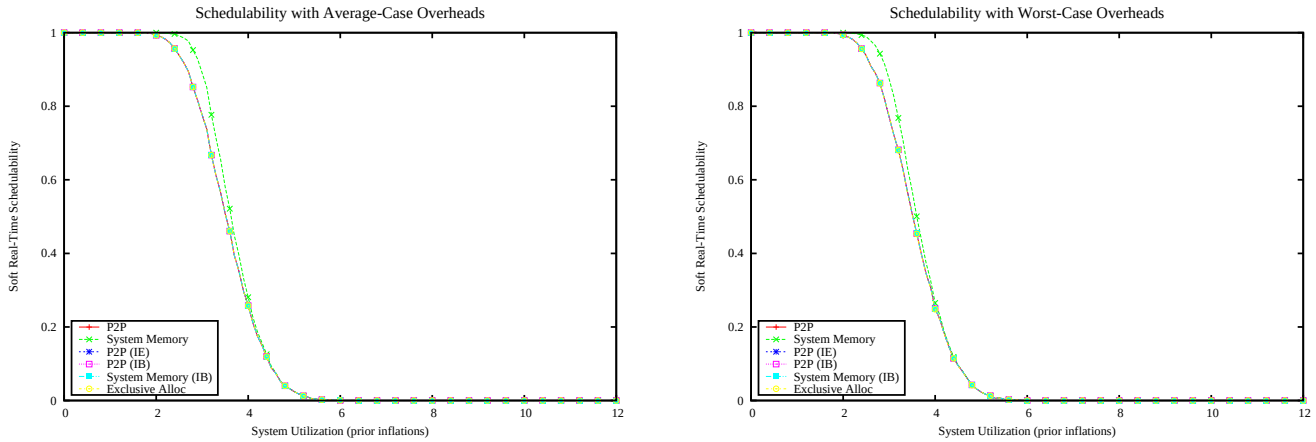

Figure 1256: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

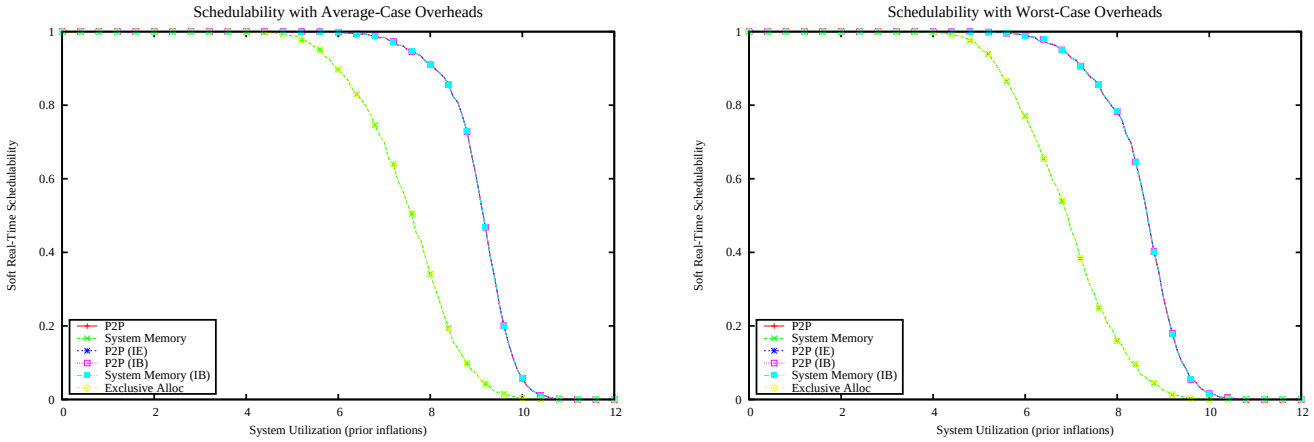

Figure 1257: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

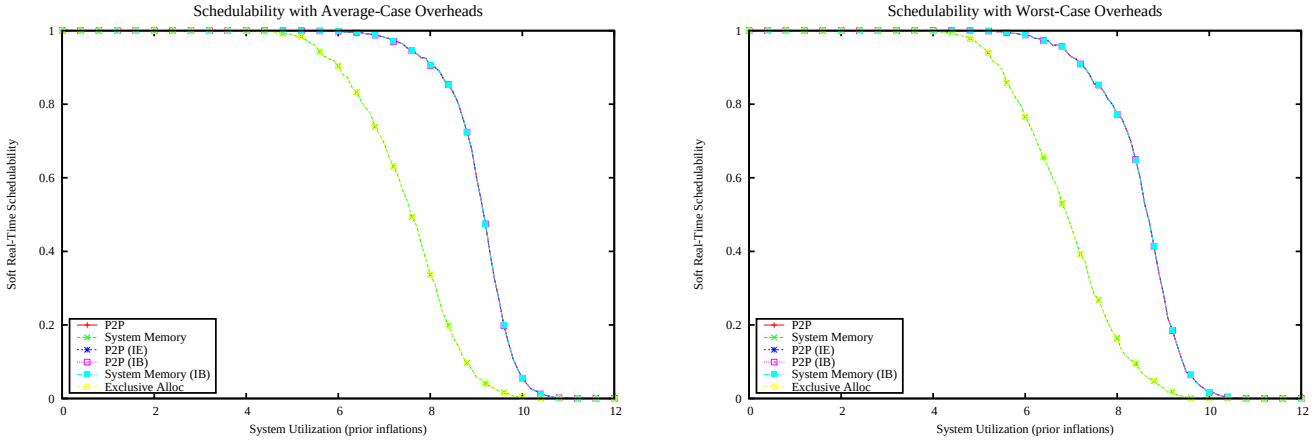

Figure 1258: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

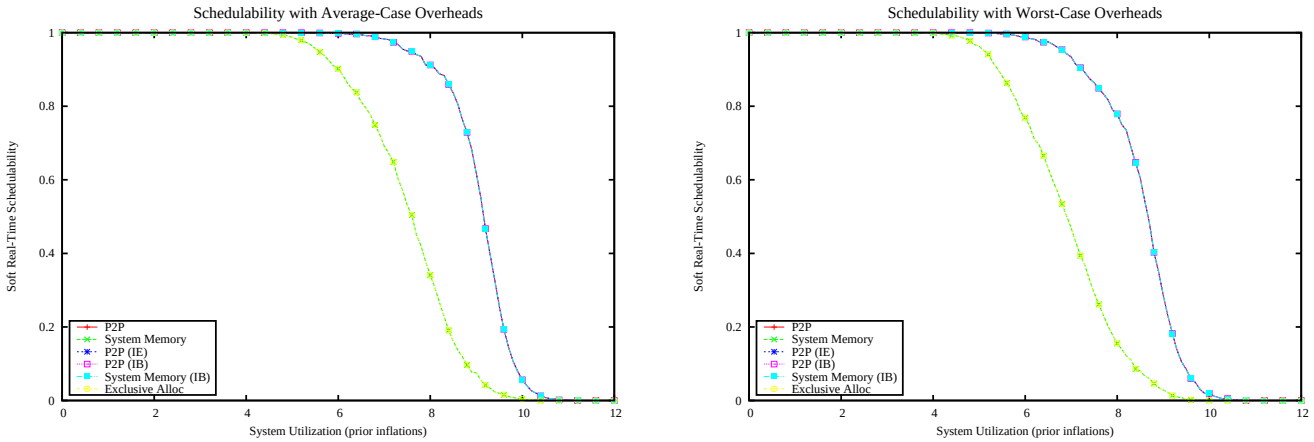

Figure 1259: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

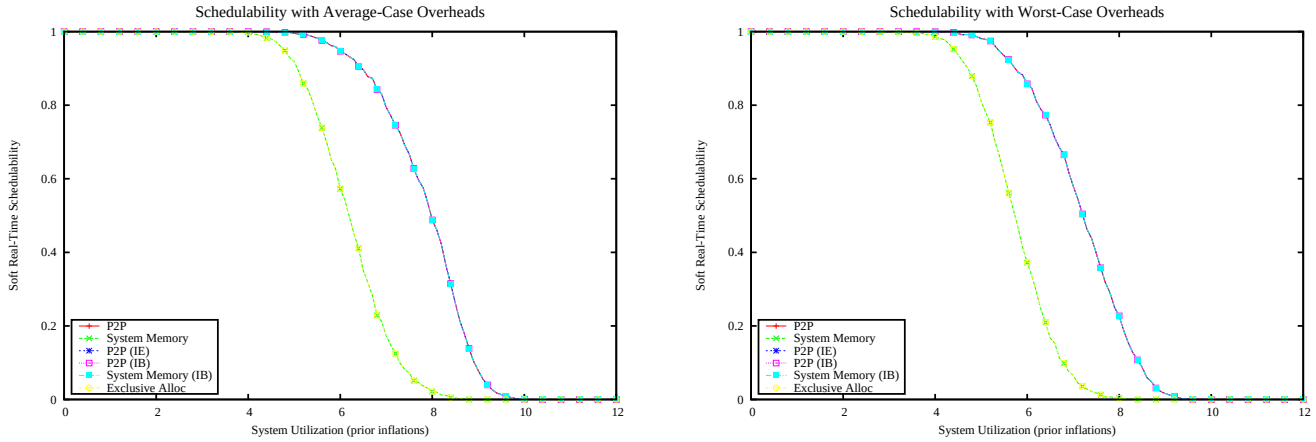

Figure 1260: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

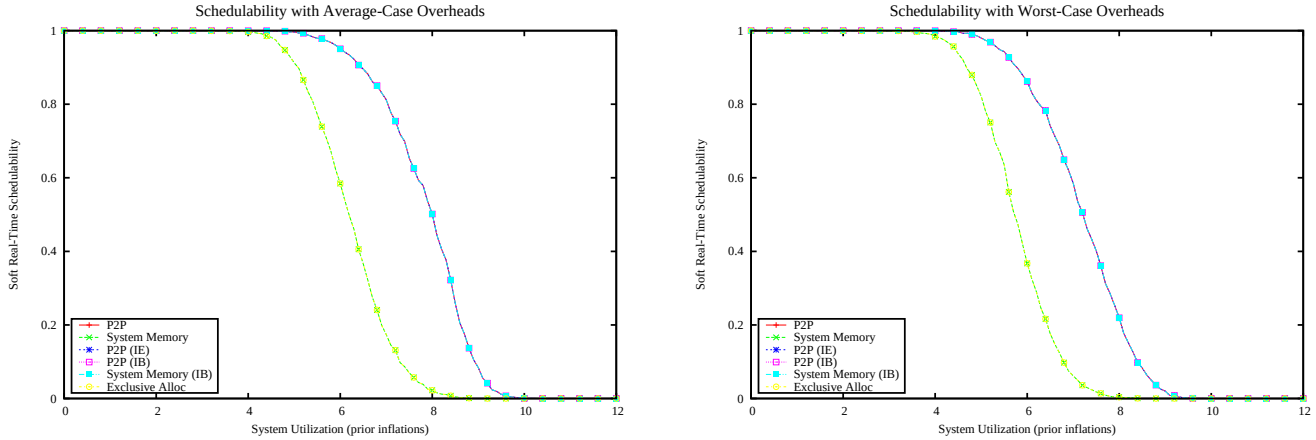

Figure 1261: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

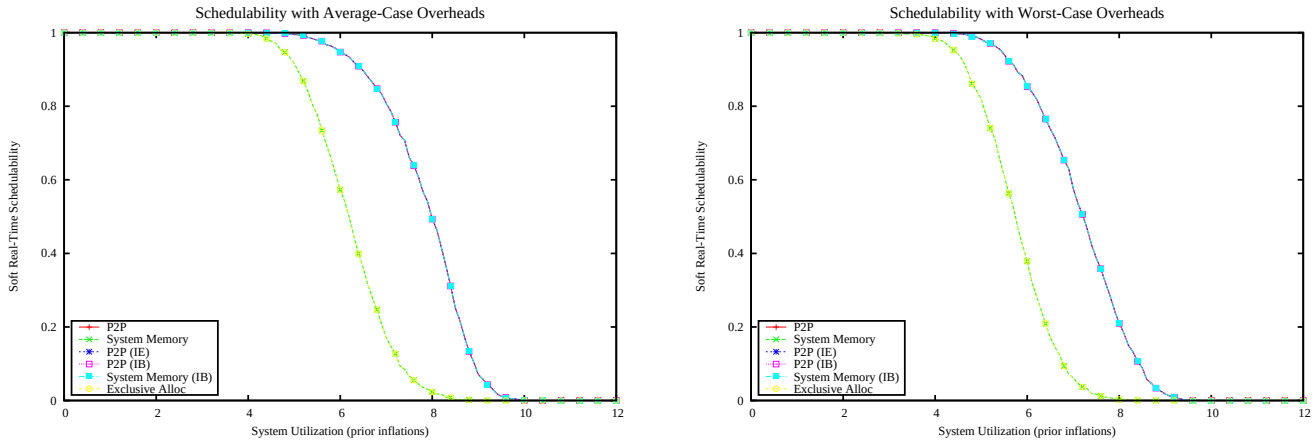

Figure 1262: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

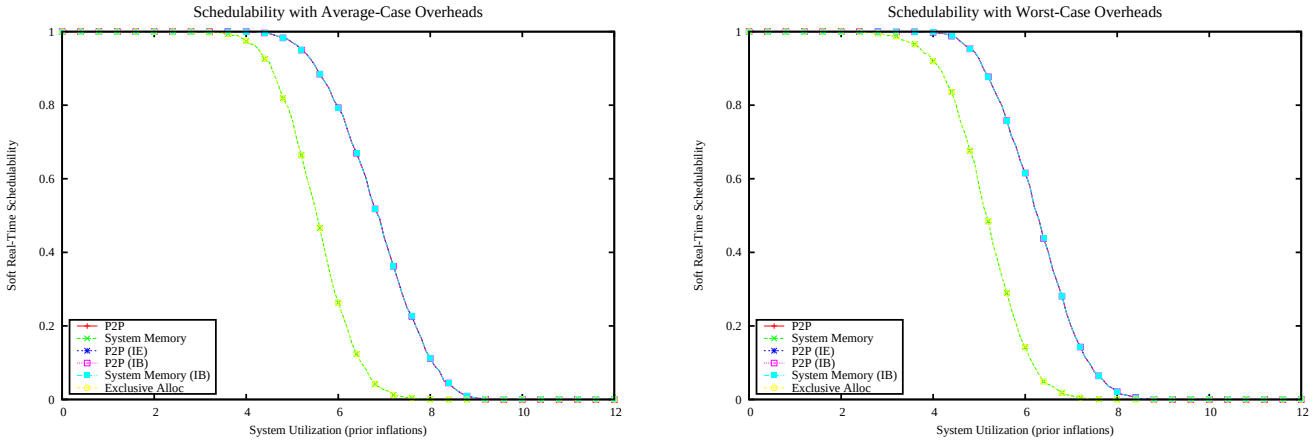

Figure 1263: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

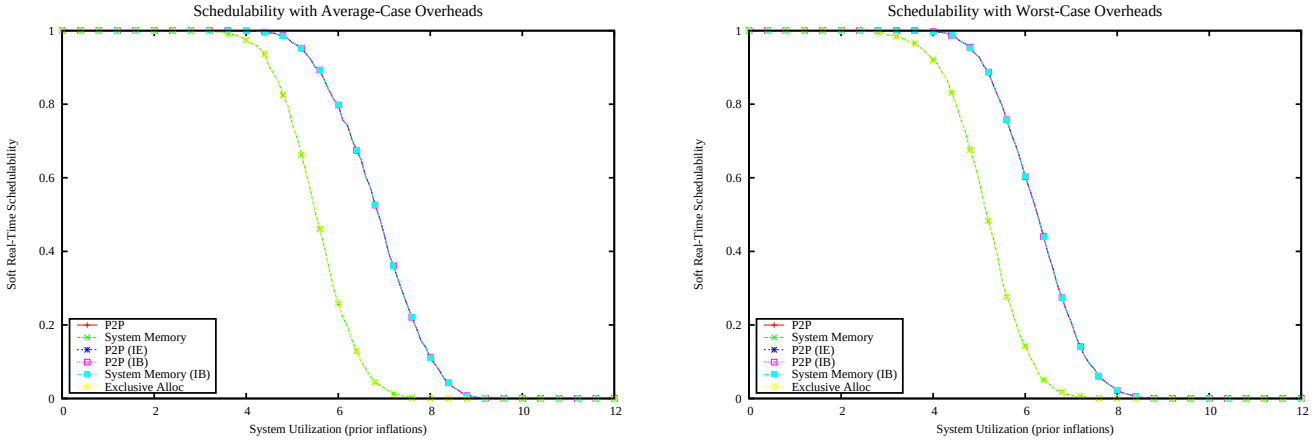

Figure 1264: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

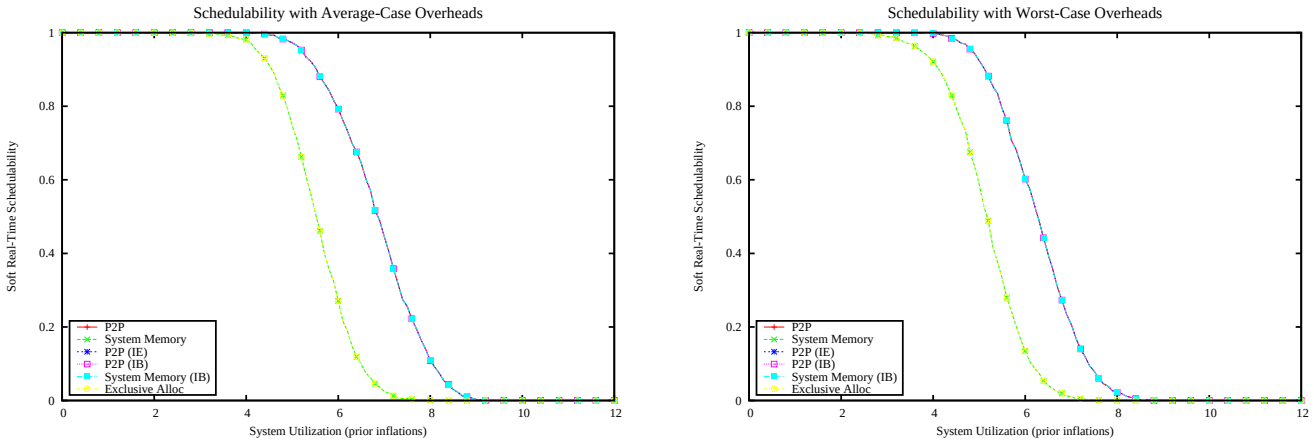

Figure 1265: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

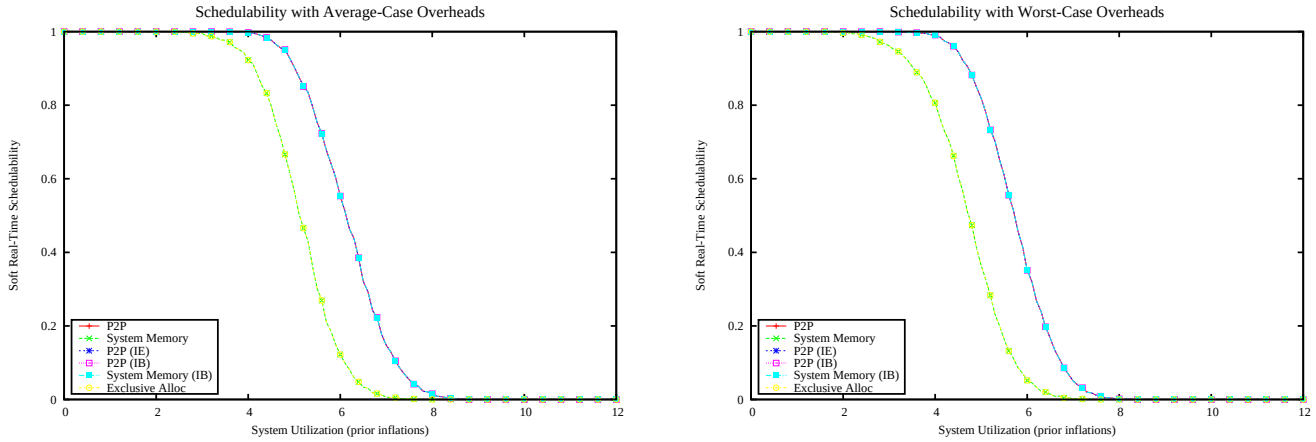

Figure 1266: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

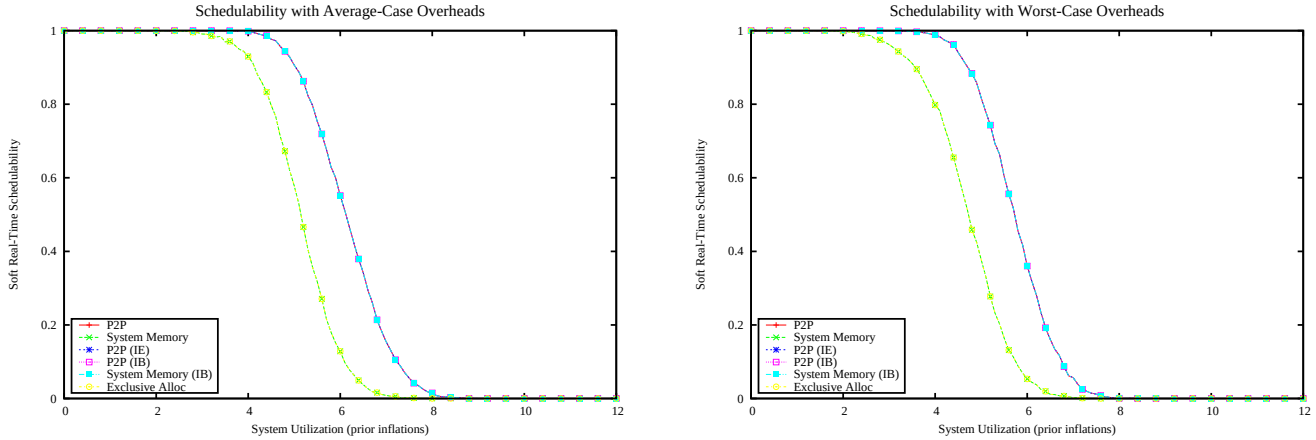

Figure 1267: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

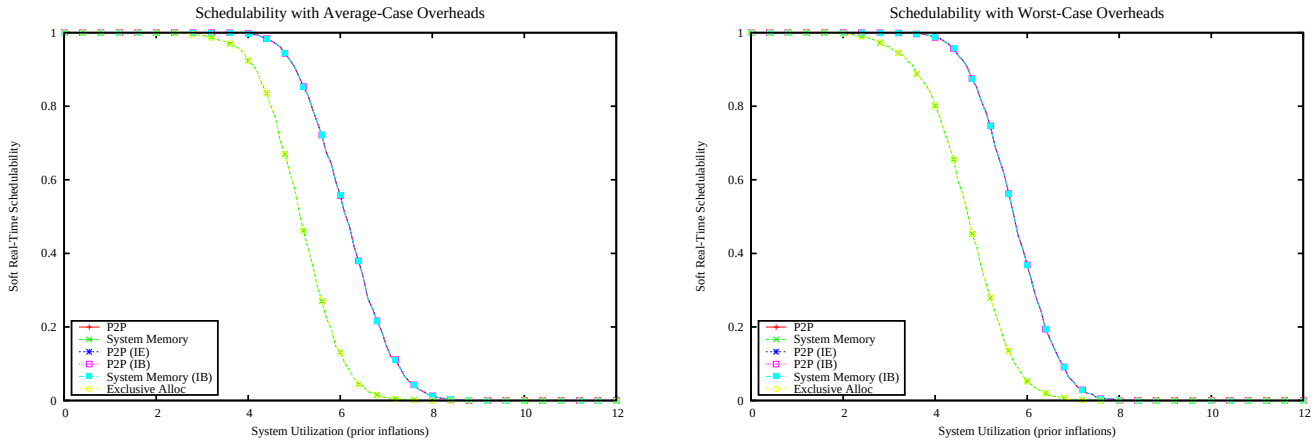

Figure 1268: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

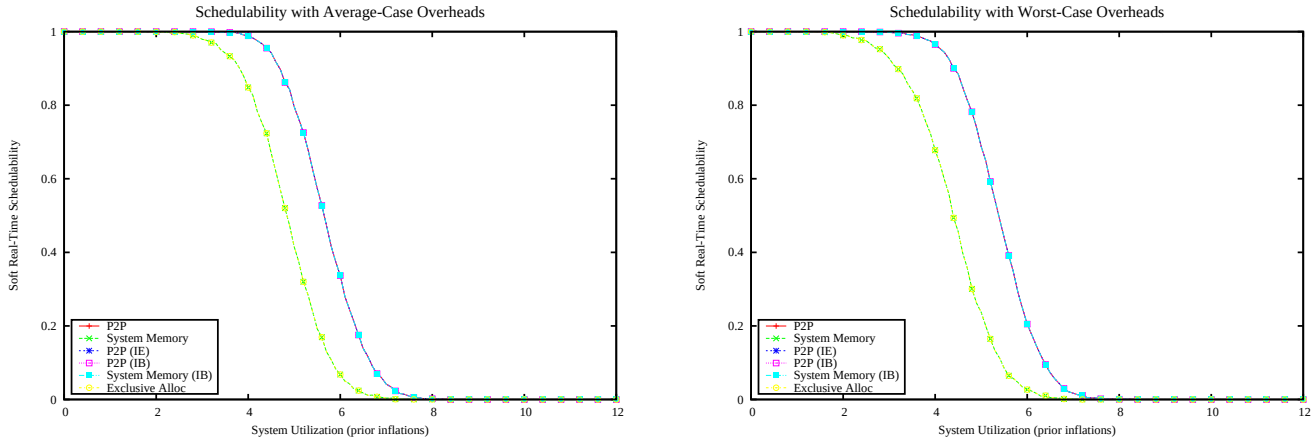

Figure 1269: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

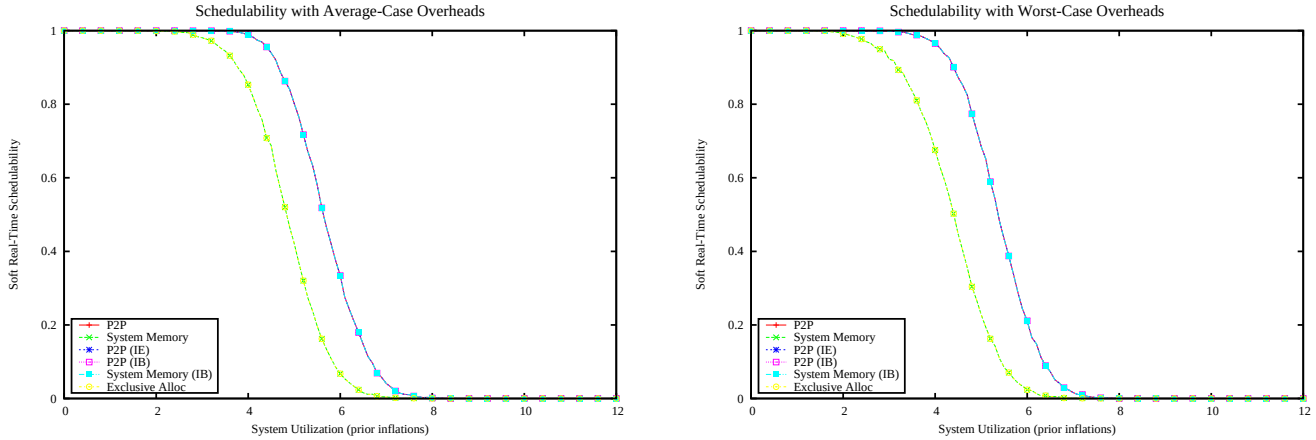

Figure 1270: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

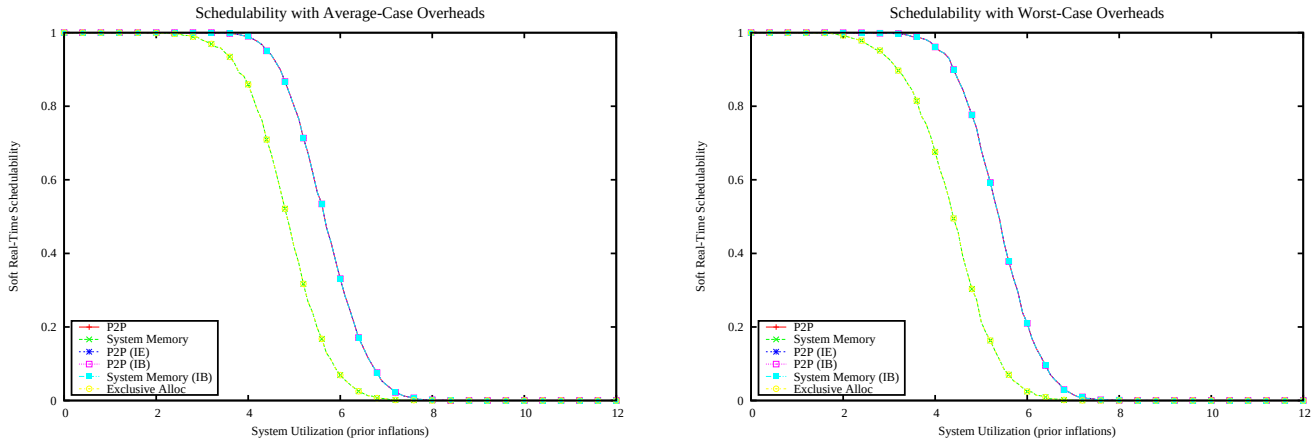

Figure 1271: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

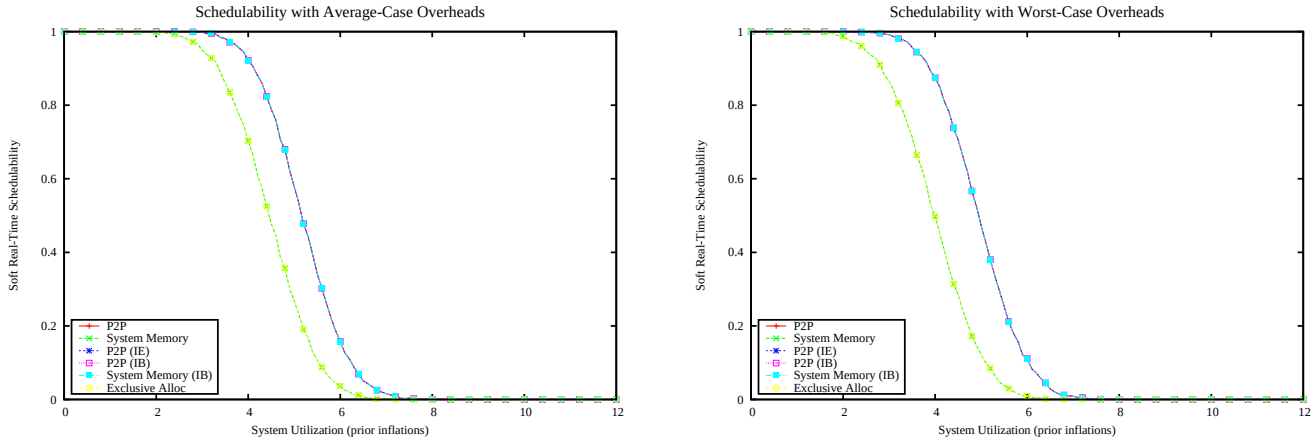

Figure 1272: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

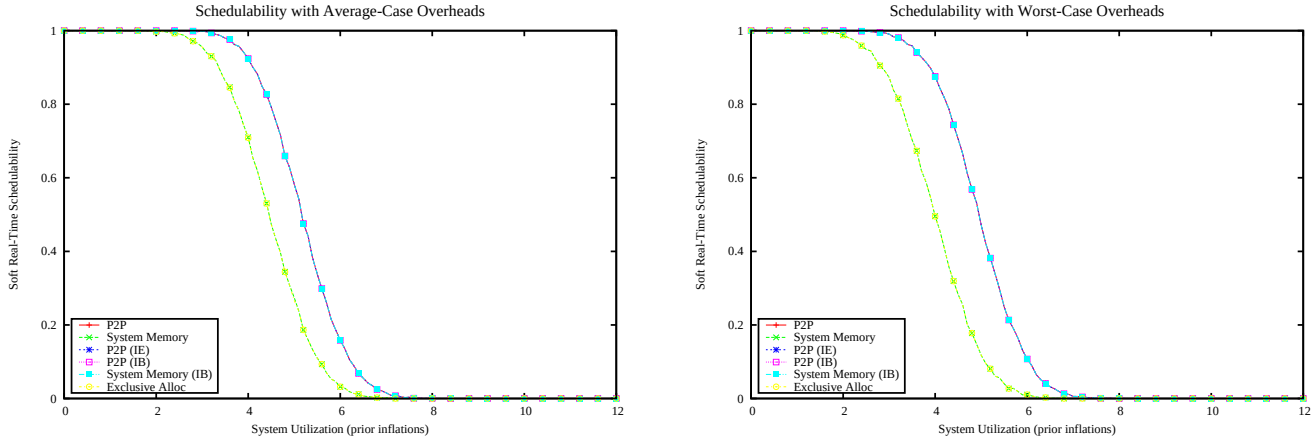

Figure 1273: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

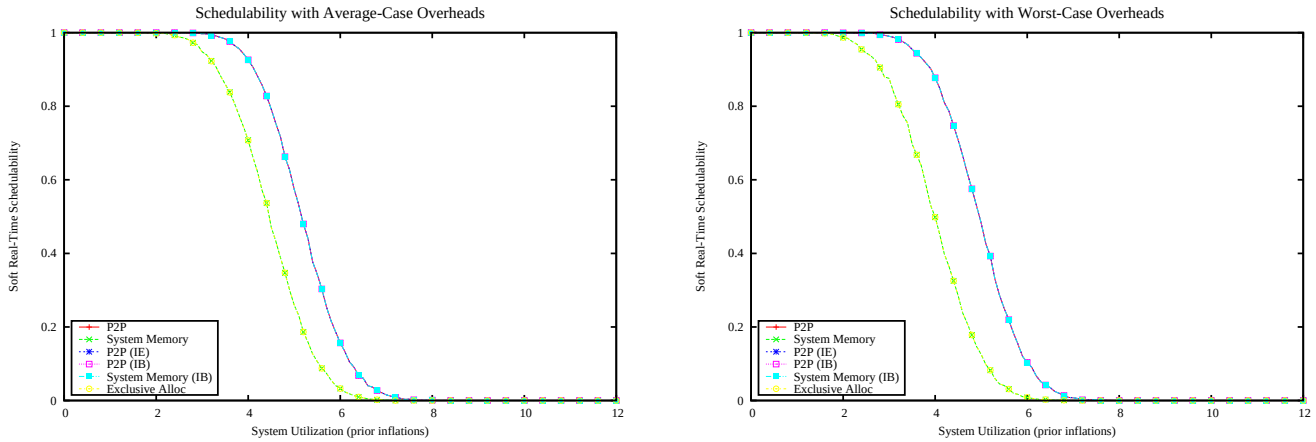

Figure 1274: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

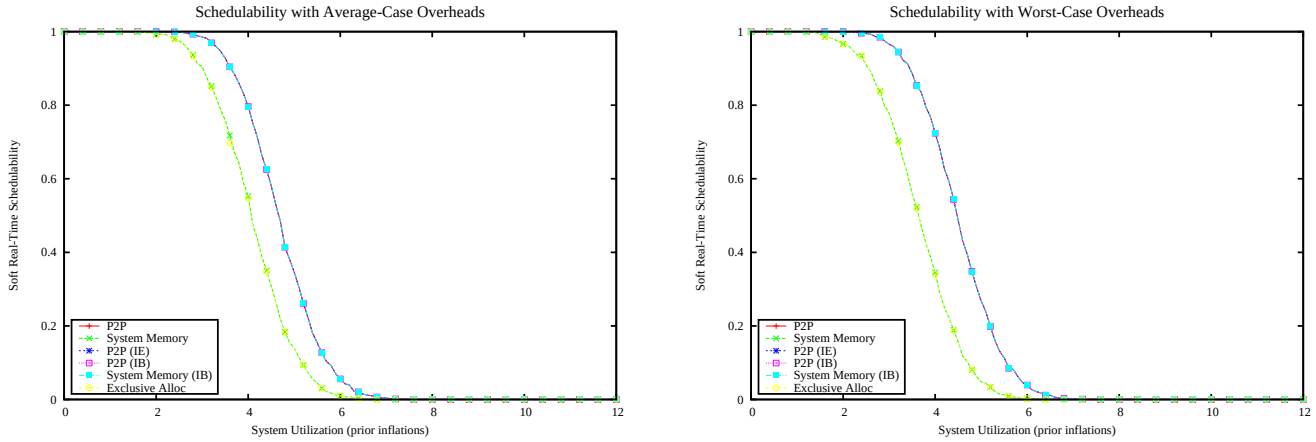

Figure 1275: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

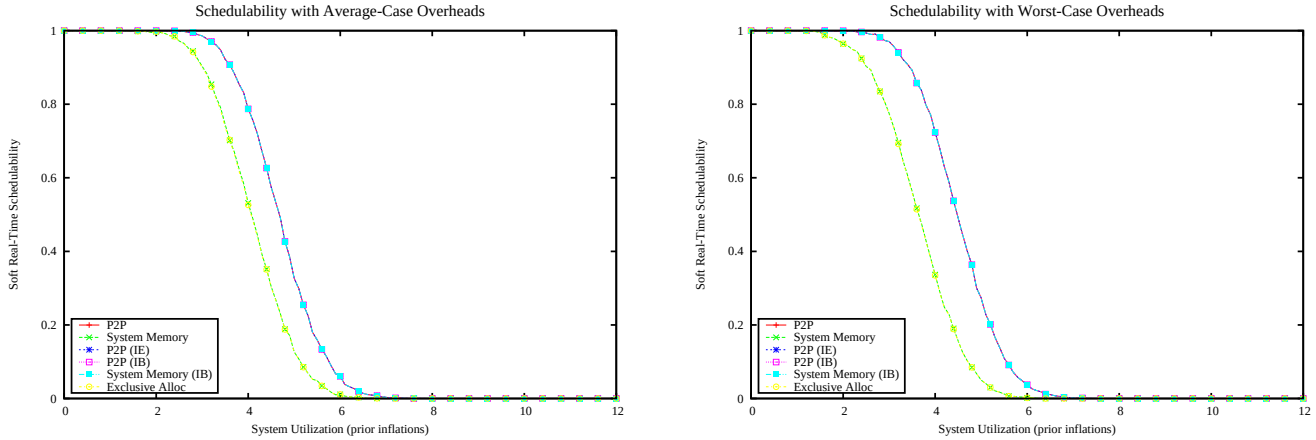

Figure 1276: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

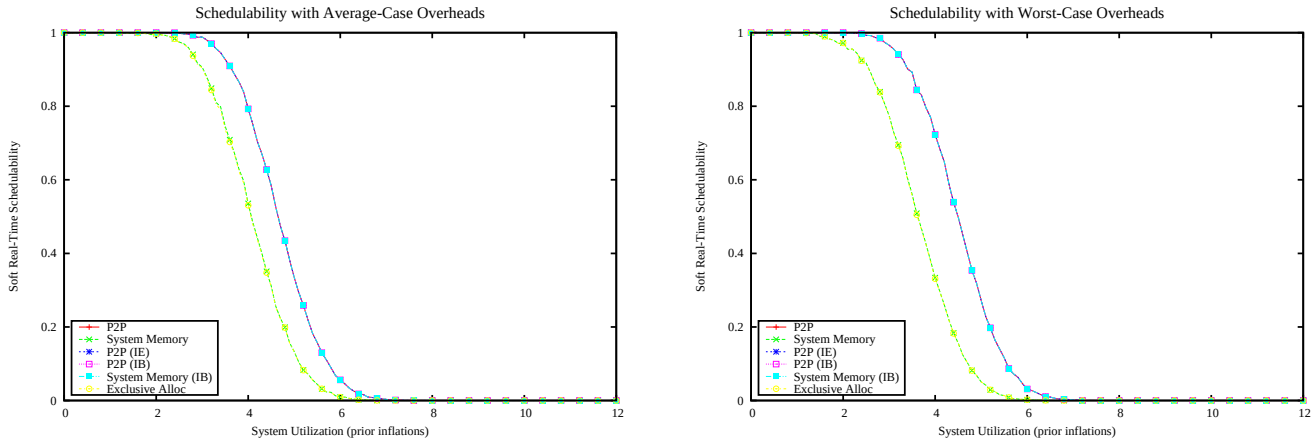

Figure 1277: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

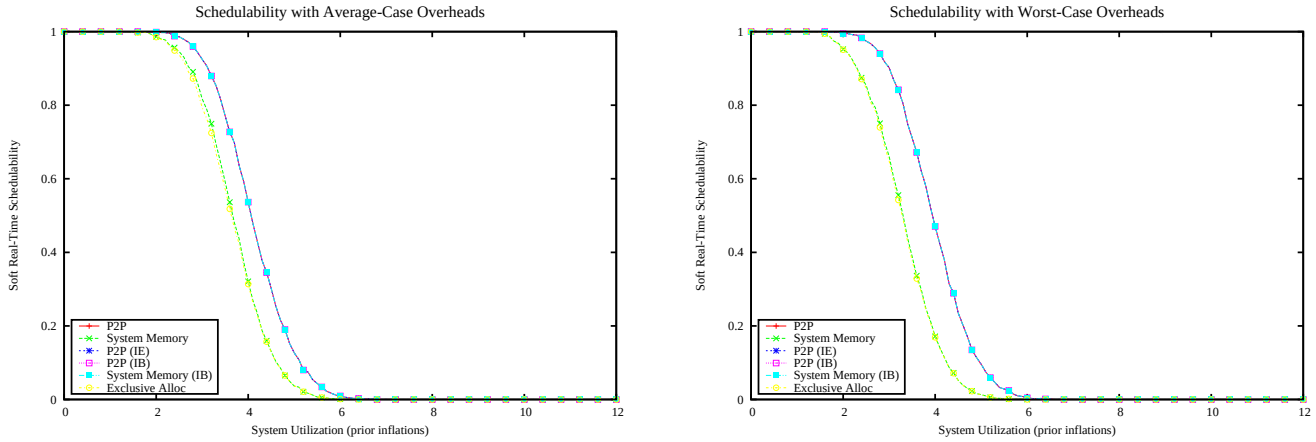

Figure 1278: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

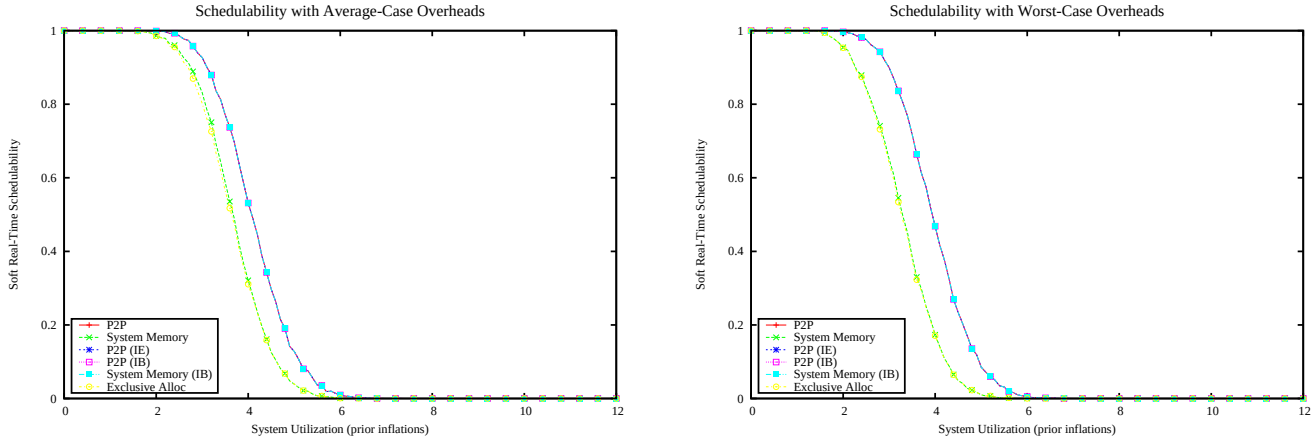

Figure 1279: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

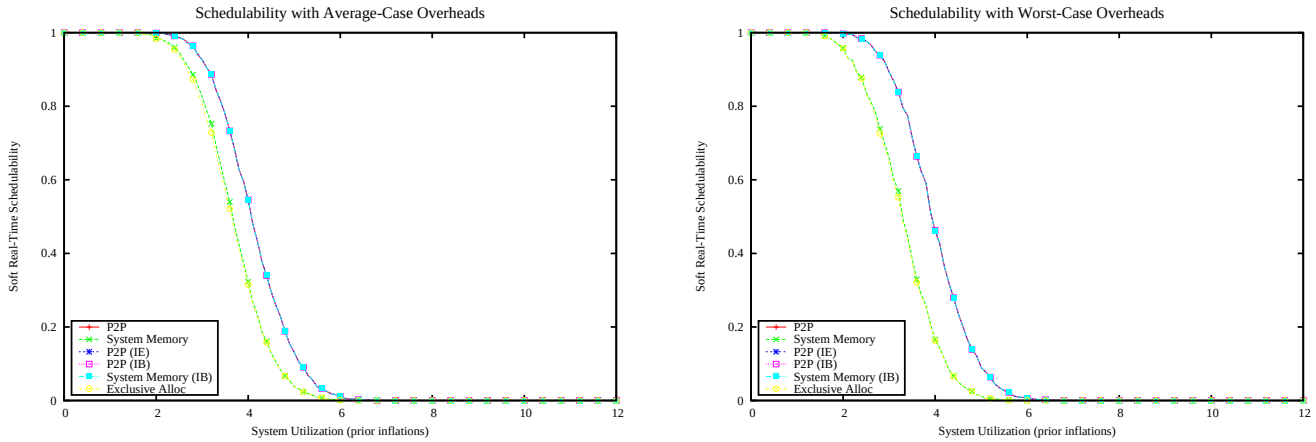

Figure 1280: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

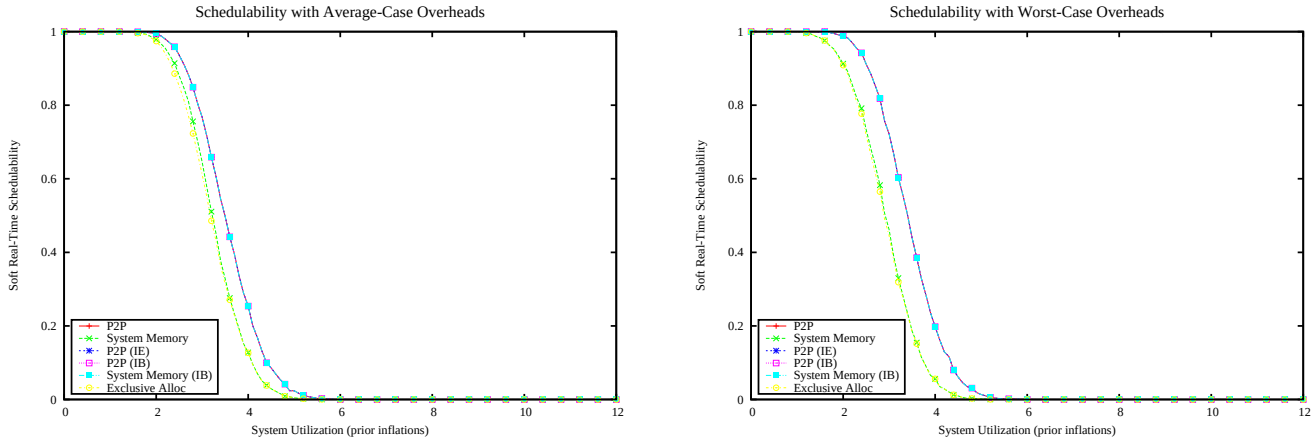

Figure 1281: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

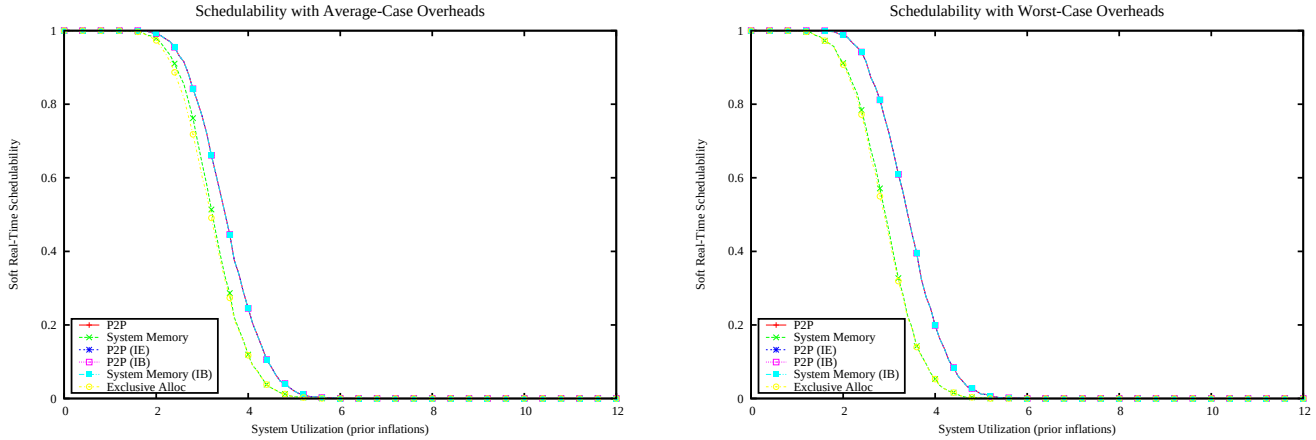

Figure 1282: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

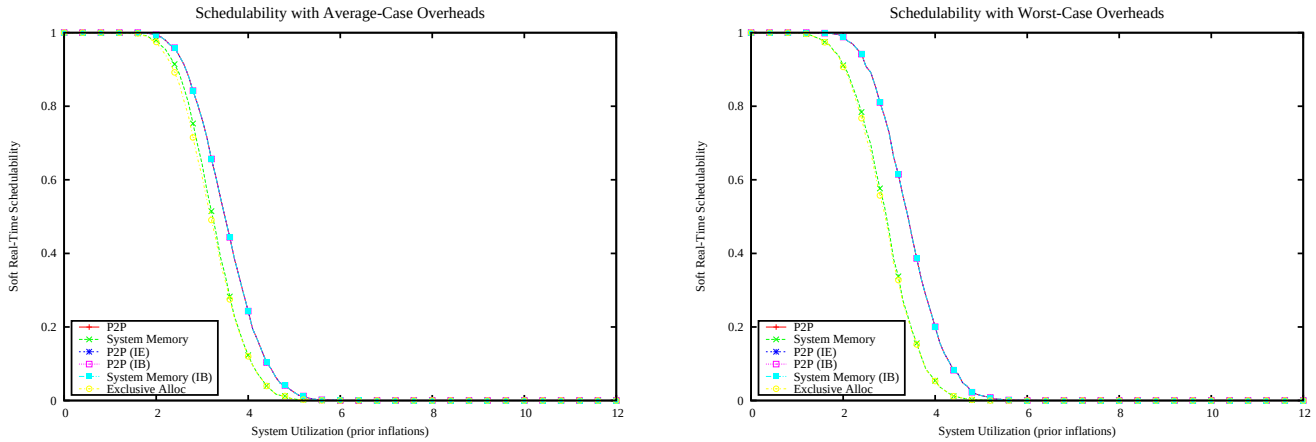

Figure 1283: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

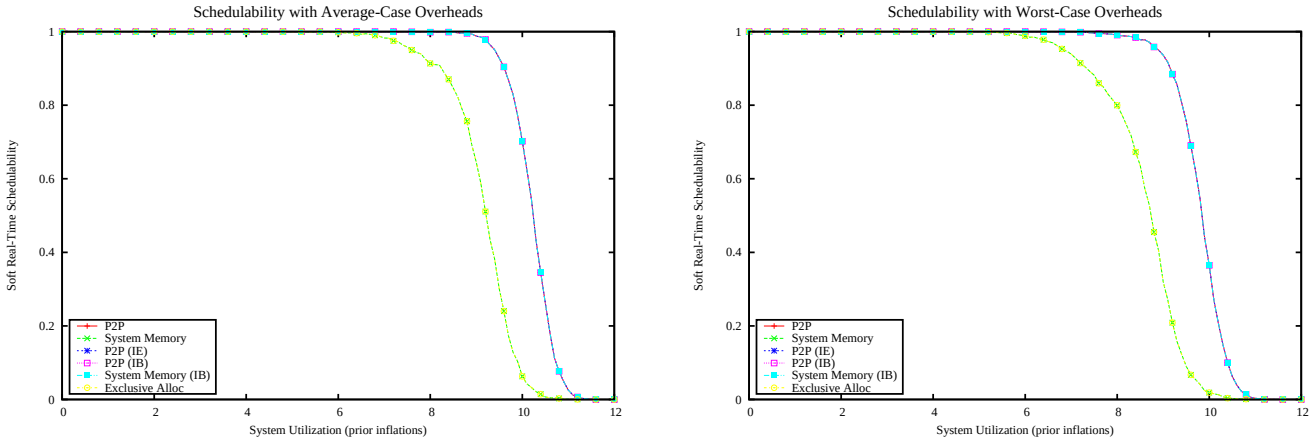

Figure 1284: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

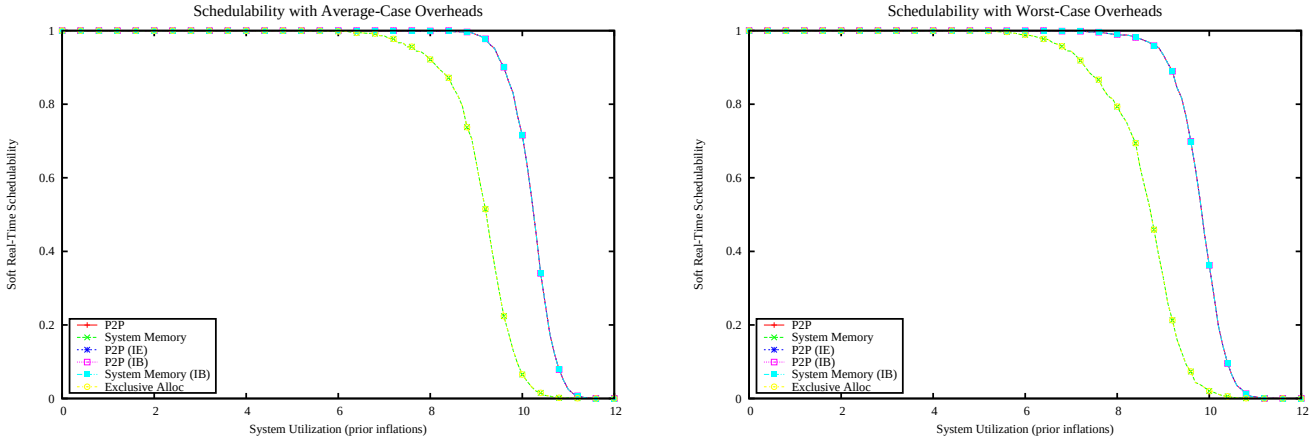

Figure 1285: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

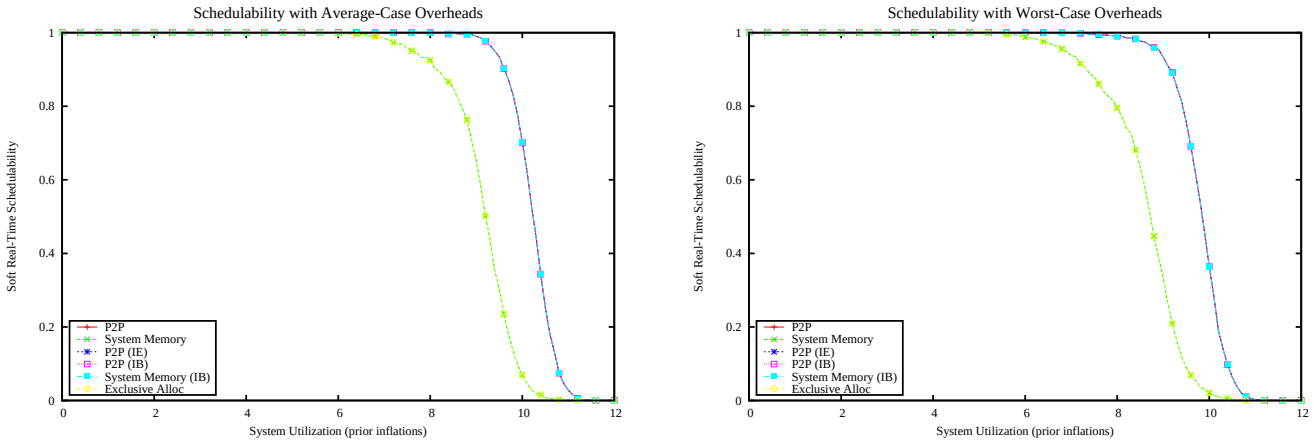

Figure 1286: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

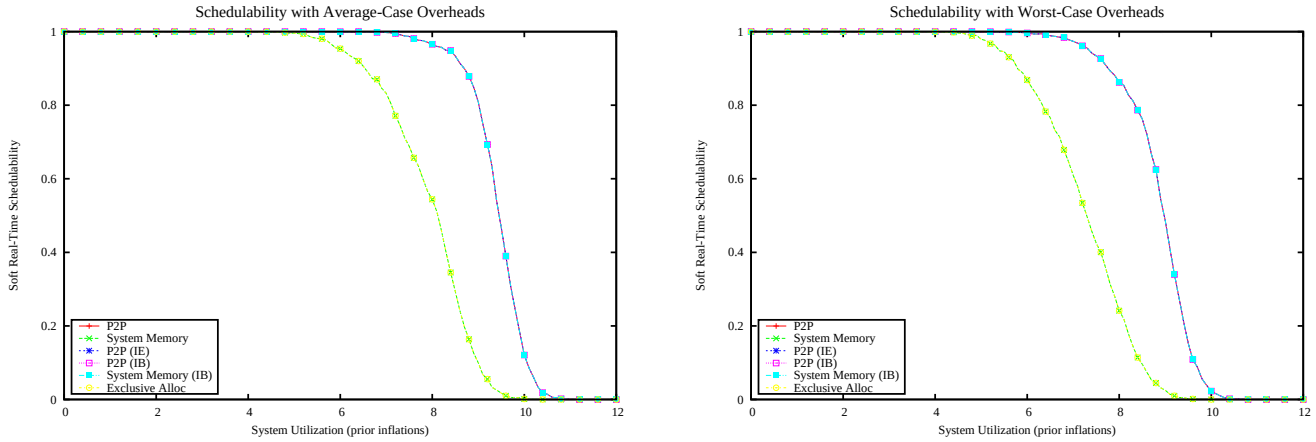

Figure 1287: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

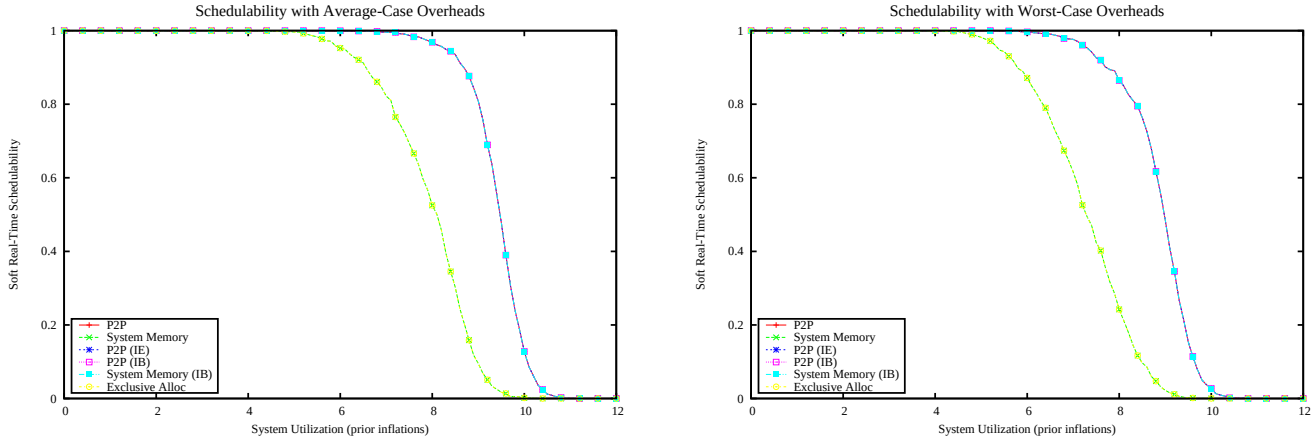

Figure 1288: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

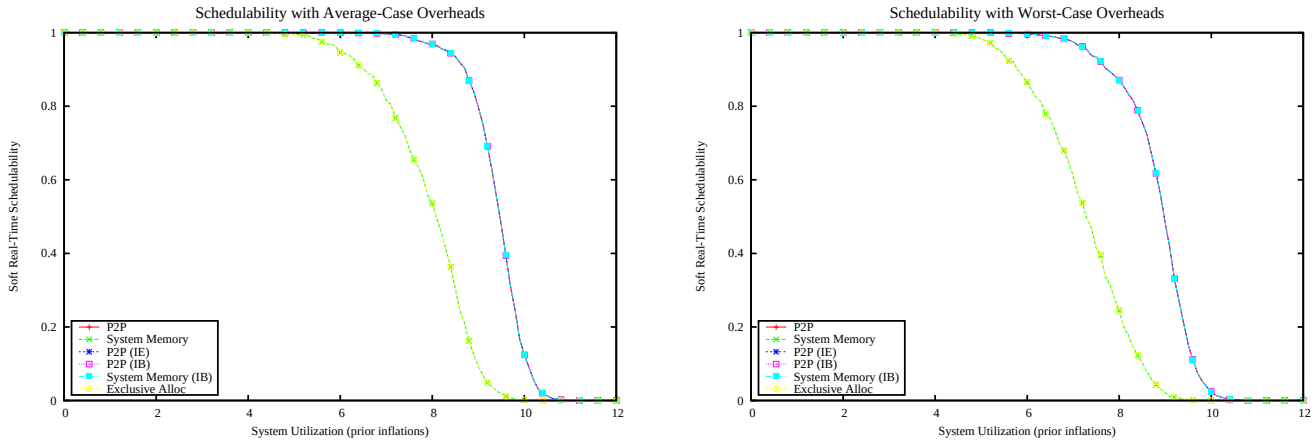

Figure 1289: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

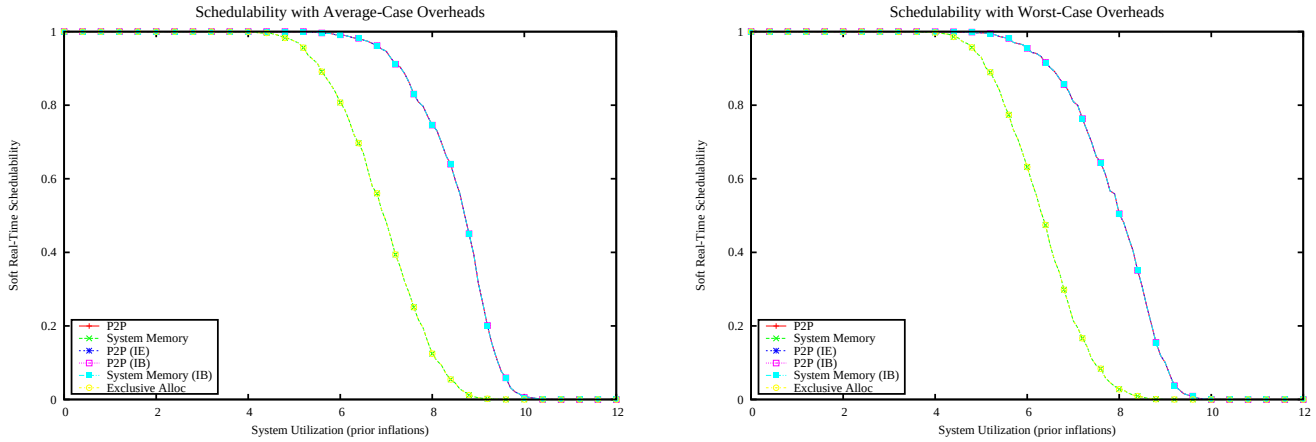

Figure 1290: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

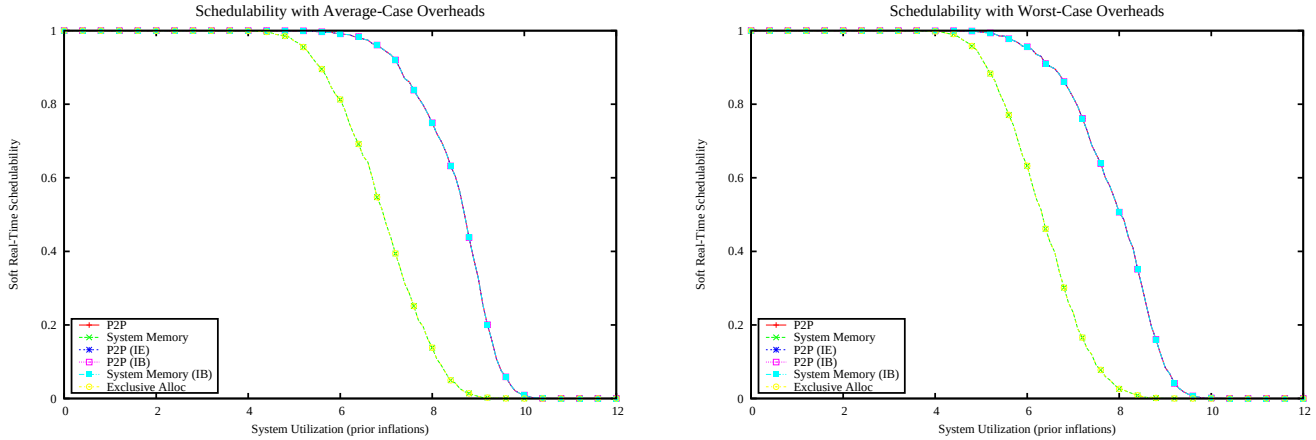

Figure 1291: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

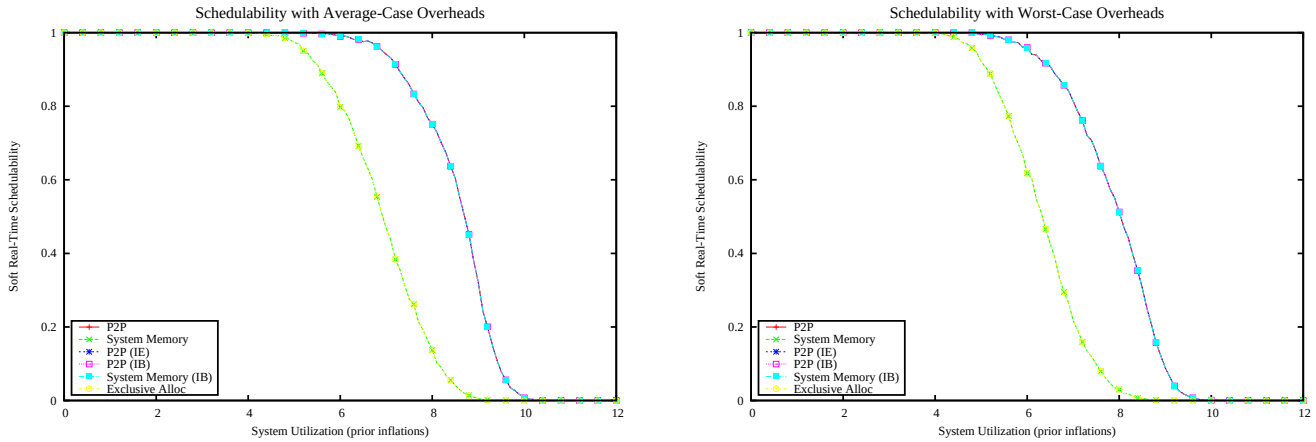

Figure 1292: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

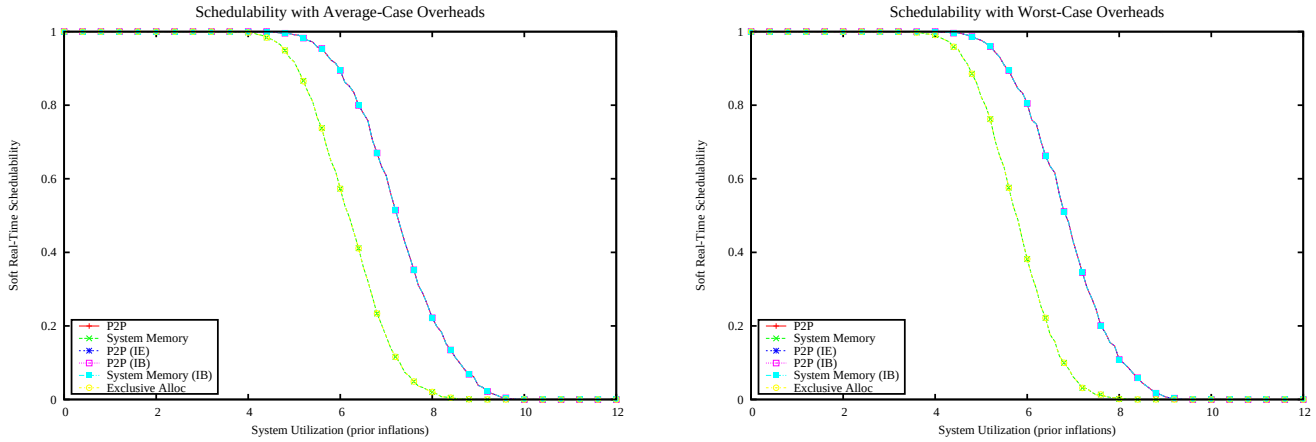

Figure 1293: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

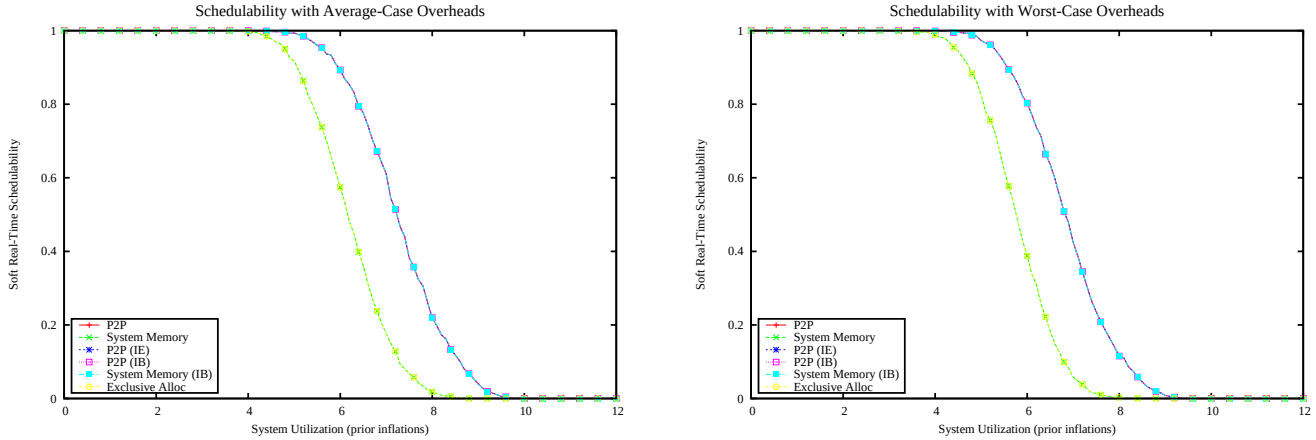

Figure 1294: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

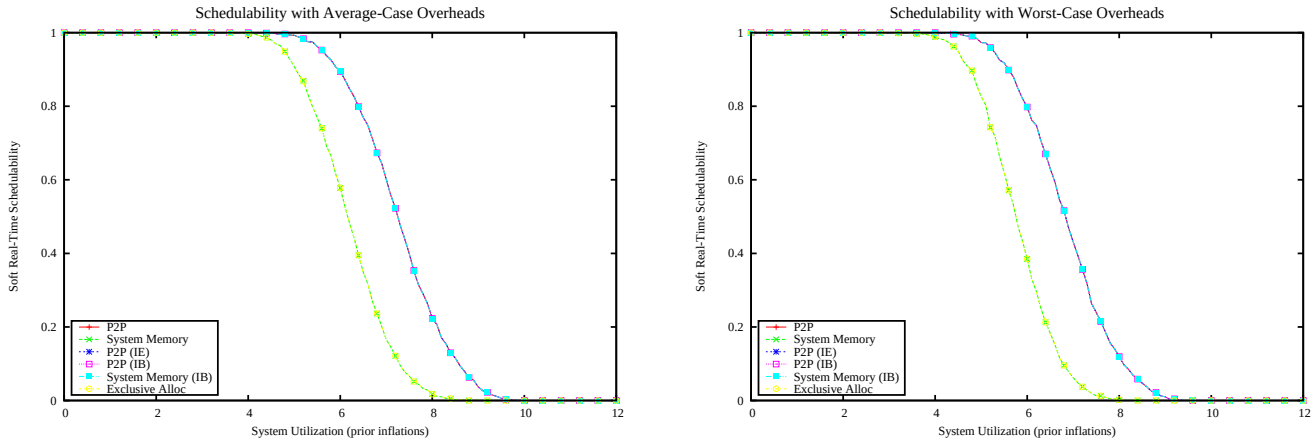

Figure 1295: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

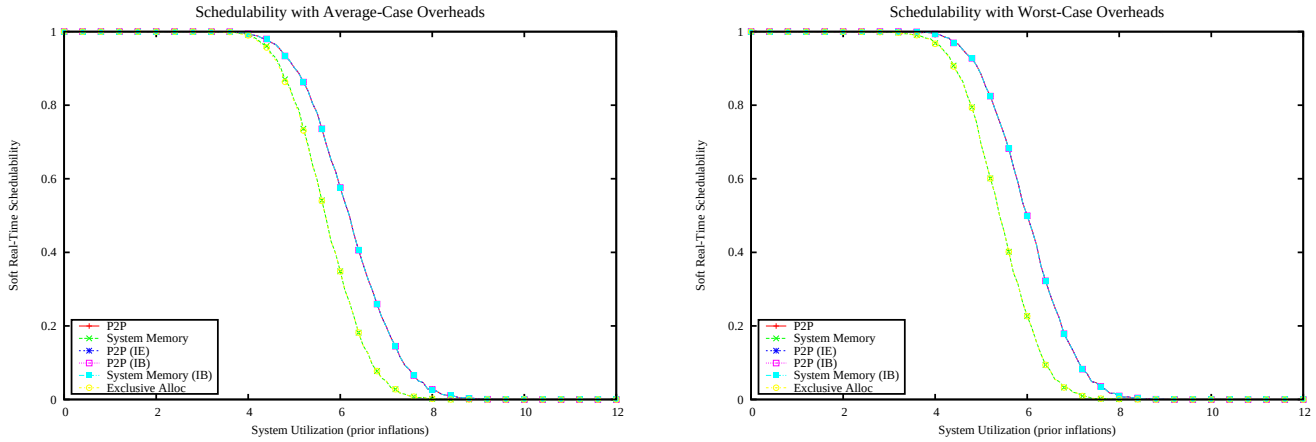

Figure 1296: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

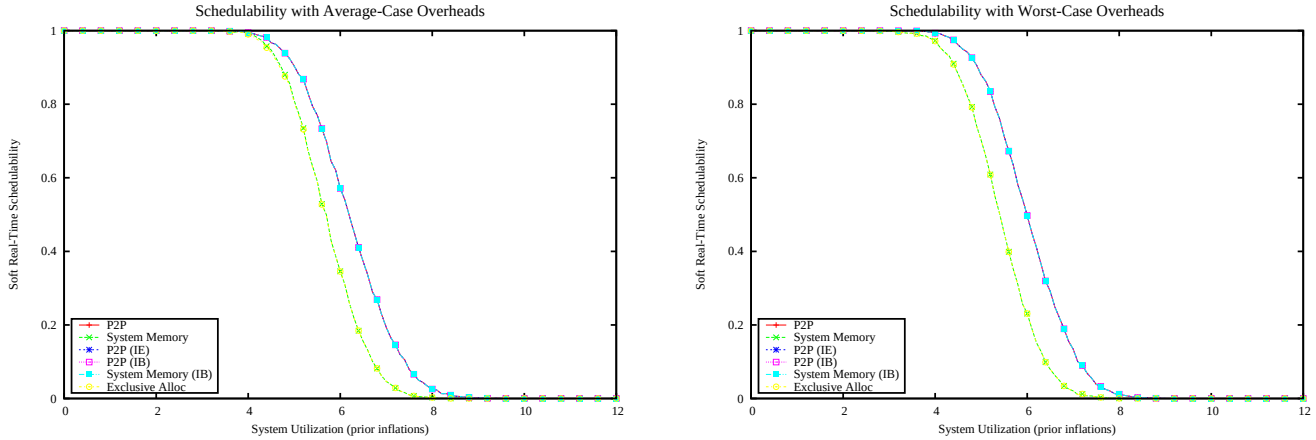

Figure 1297: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

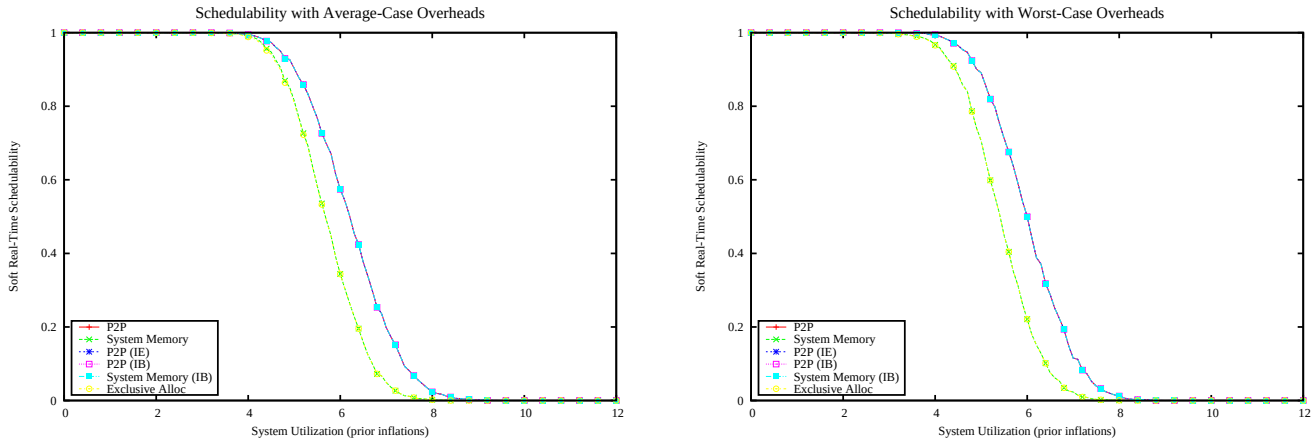

Figure 1298: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

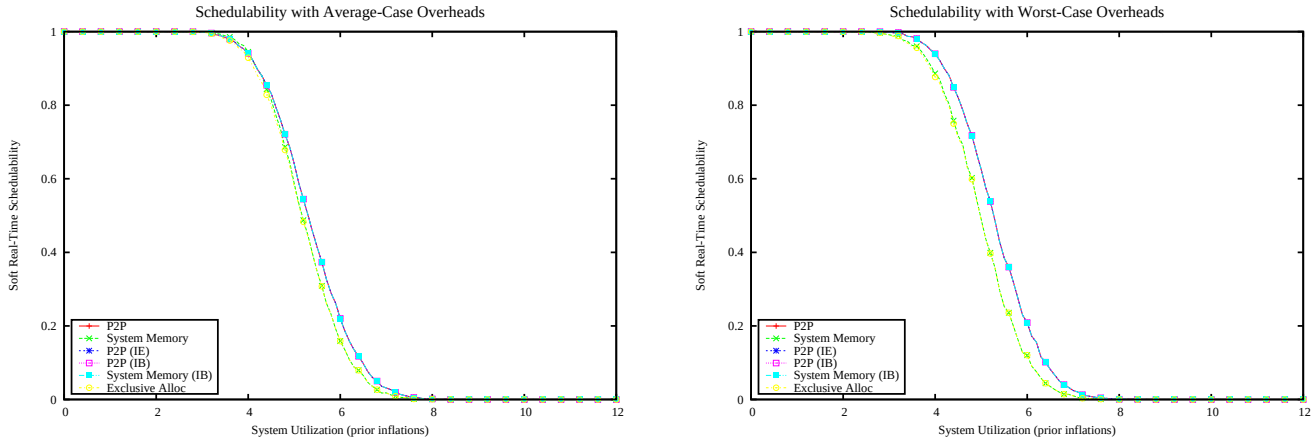

Figure 1299: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

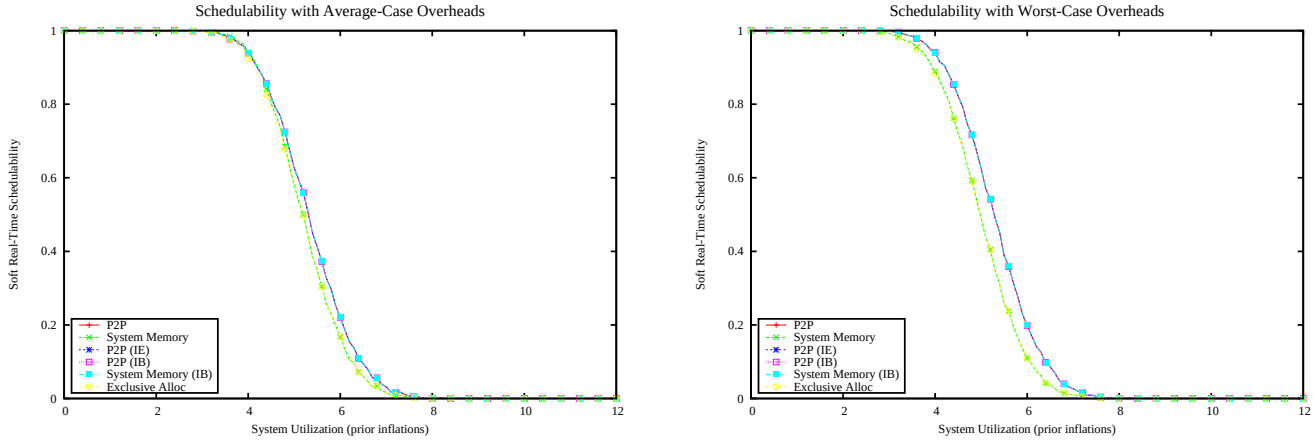

Figure 1300: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

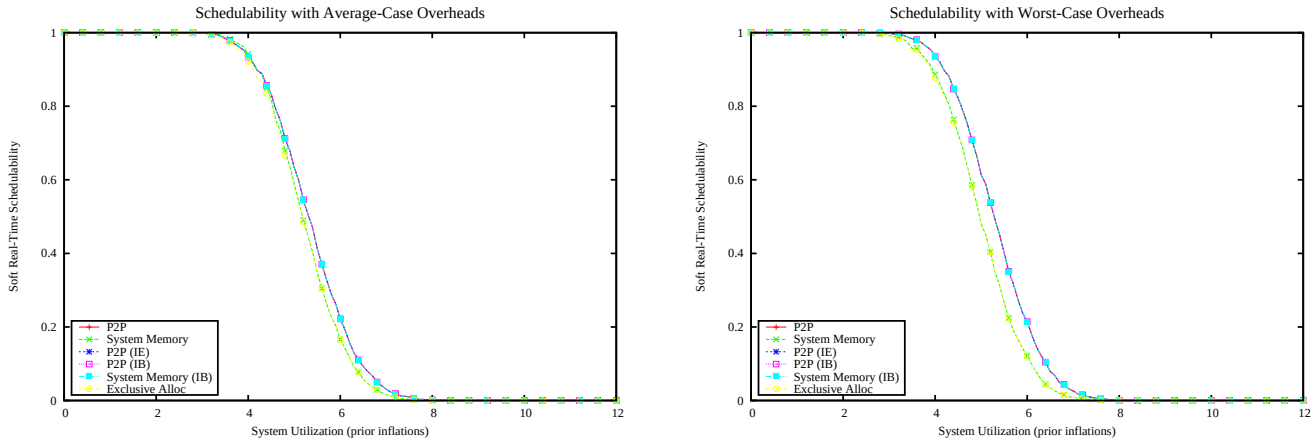

Figure 1301: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

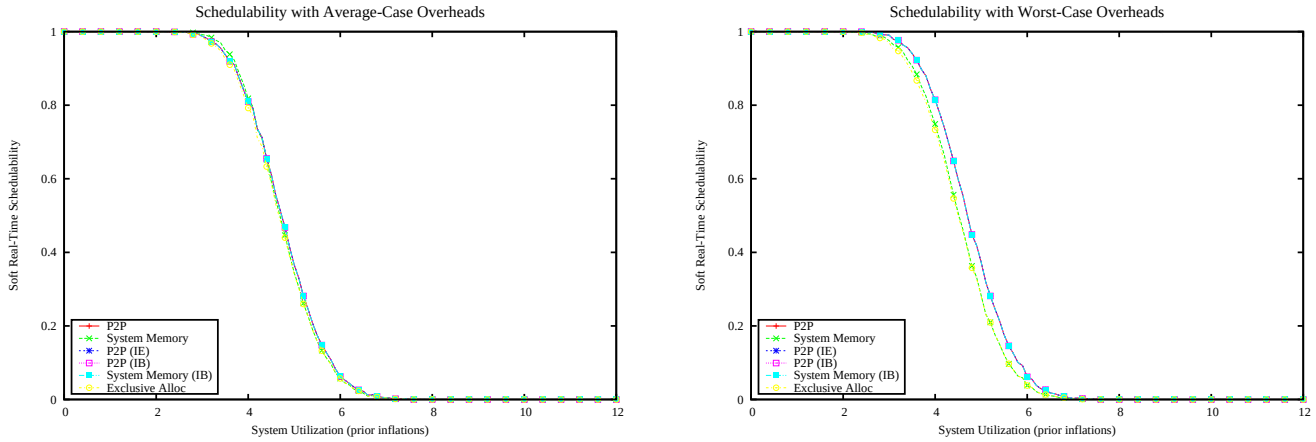

Figure 1302: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

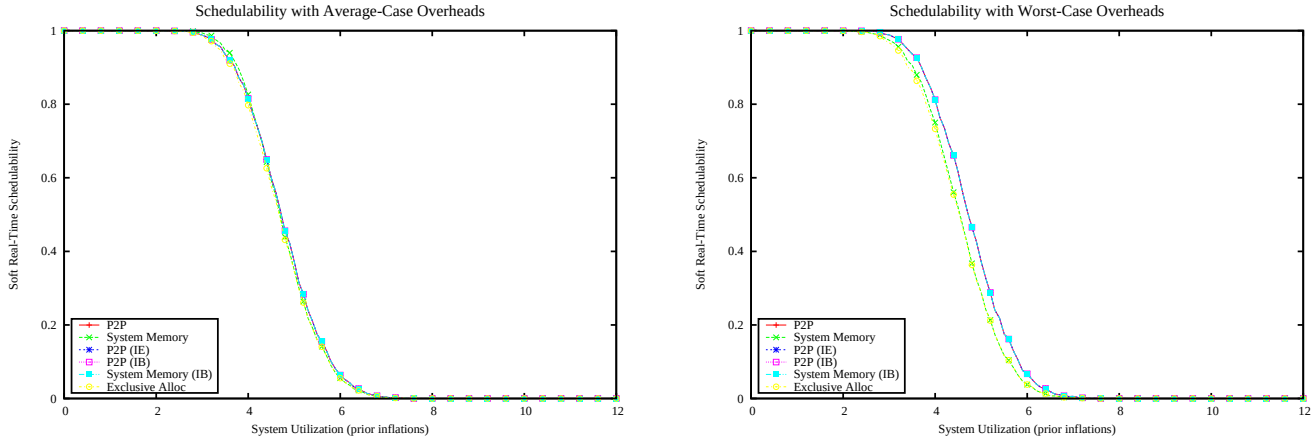

Figure 1303: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

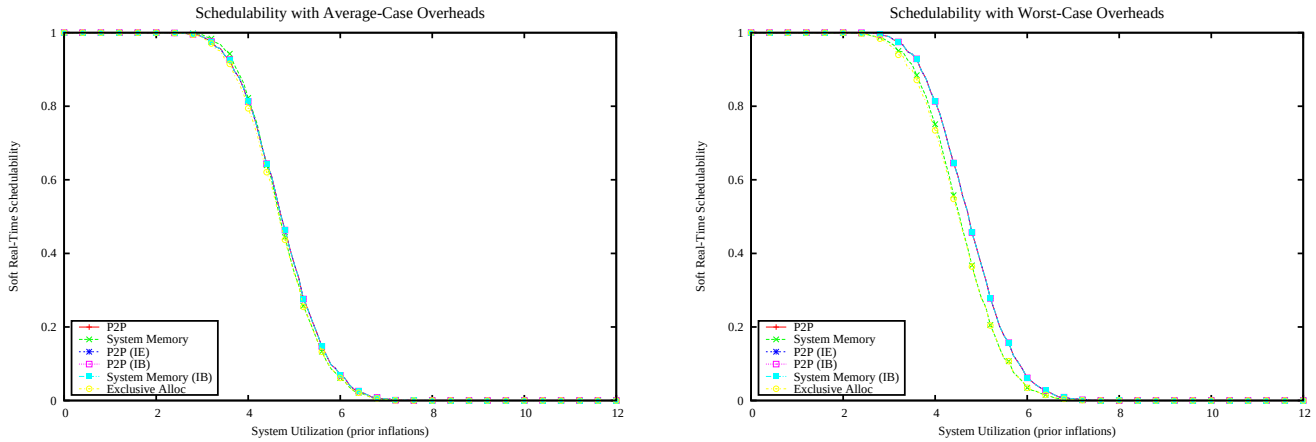

Figure 1304: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

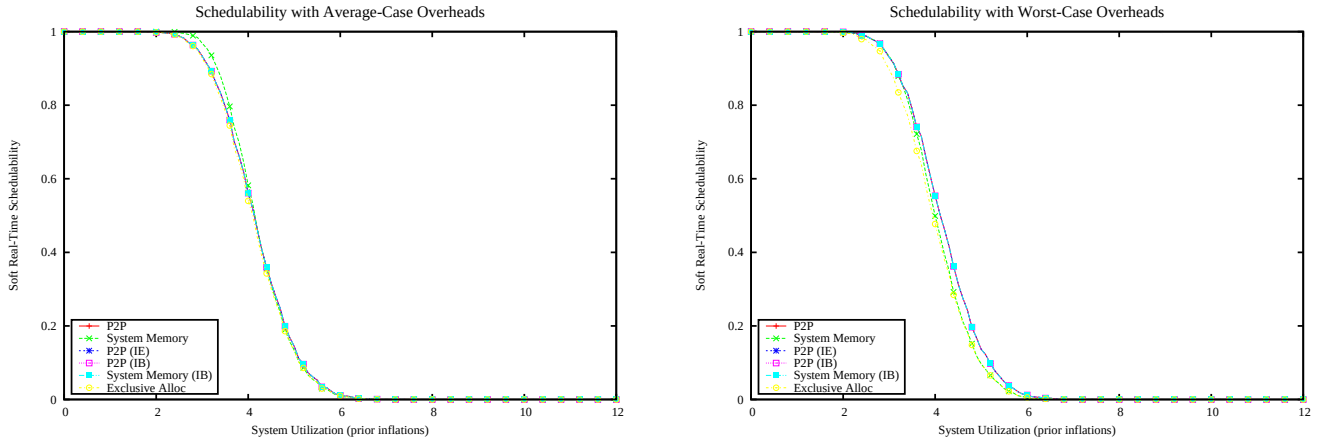

Figure 1305: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

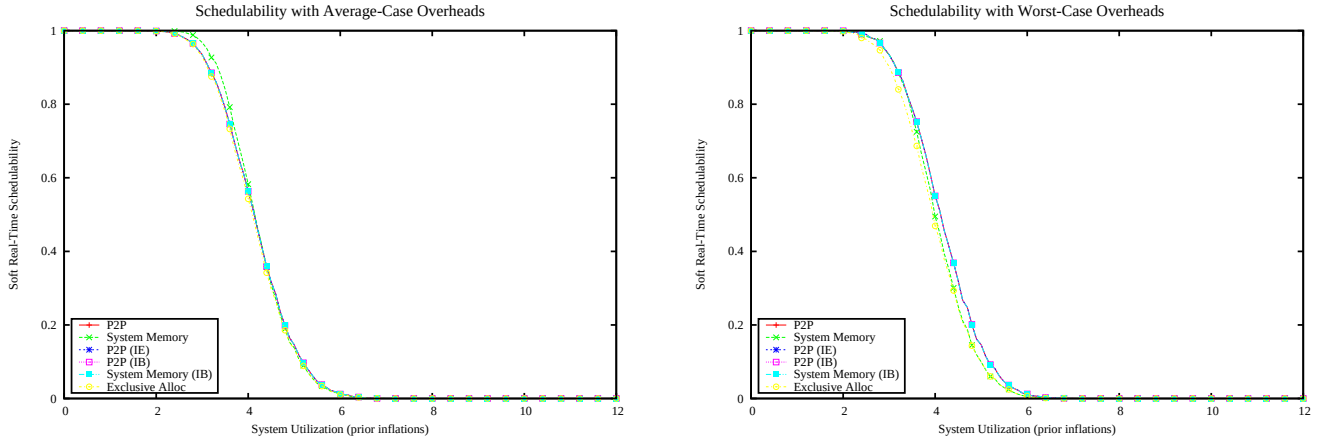

Figure 1306: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

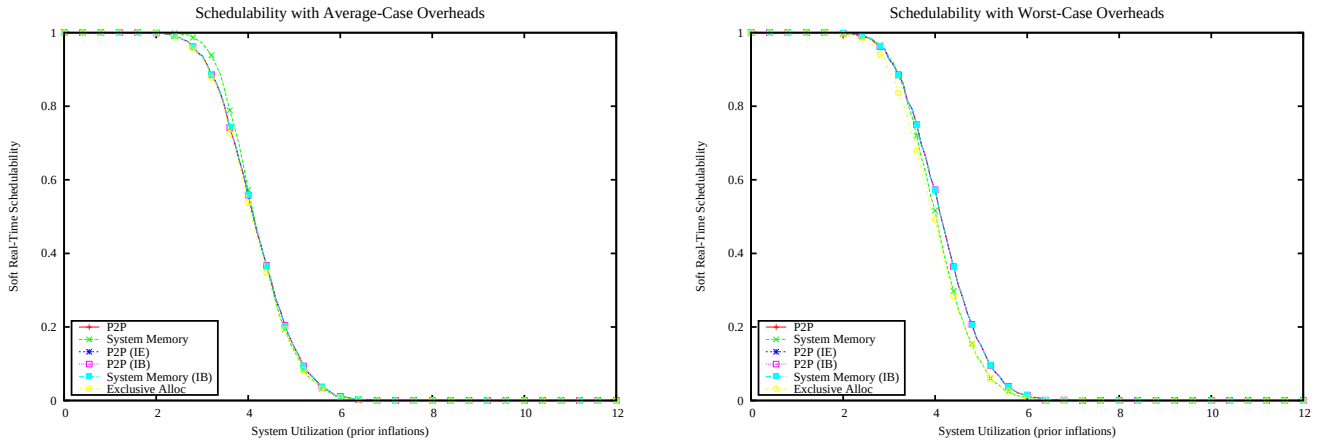

Figure 1307: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

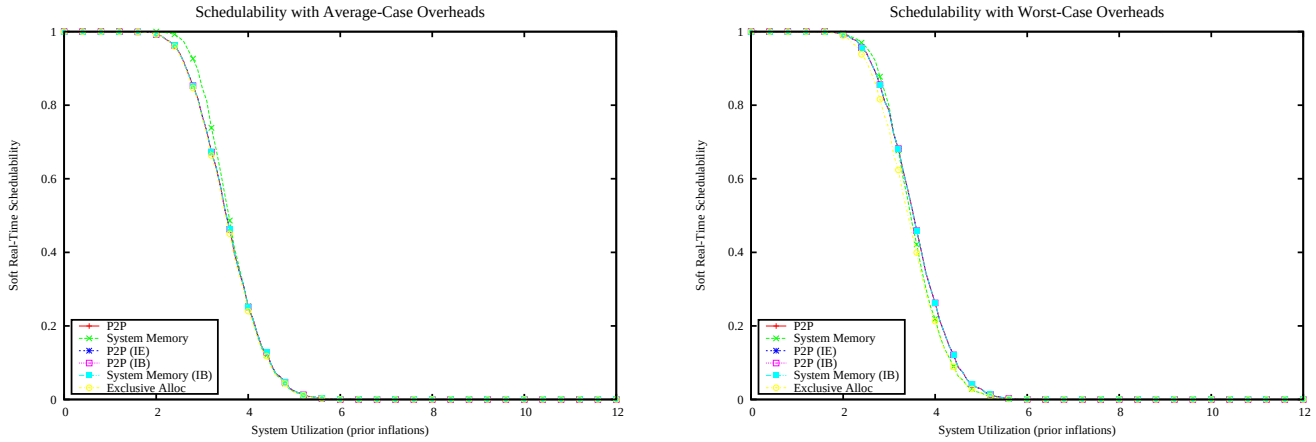

Figure 1308: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

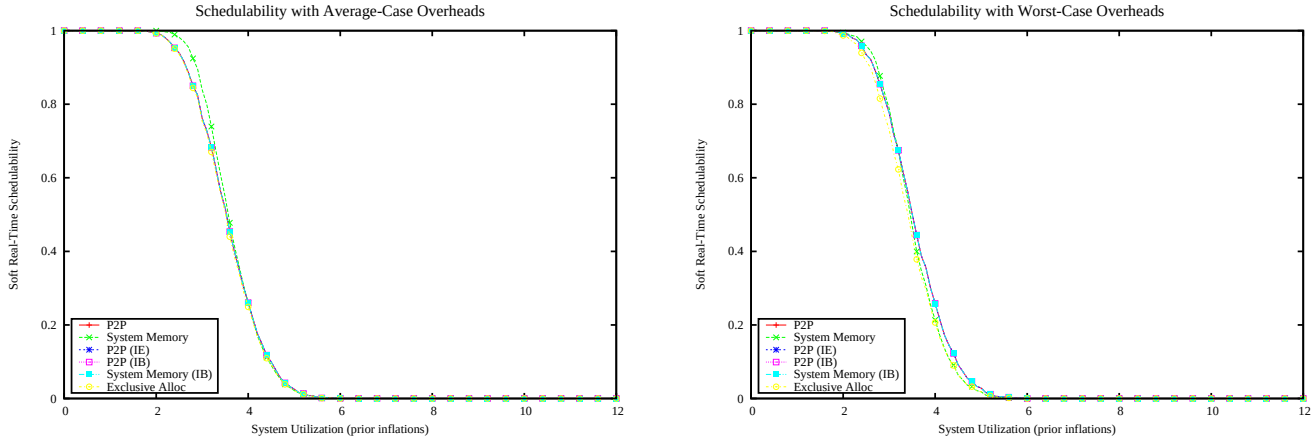

Figure 1309: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

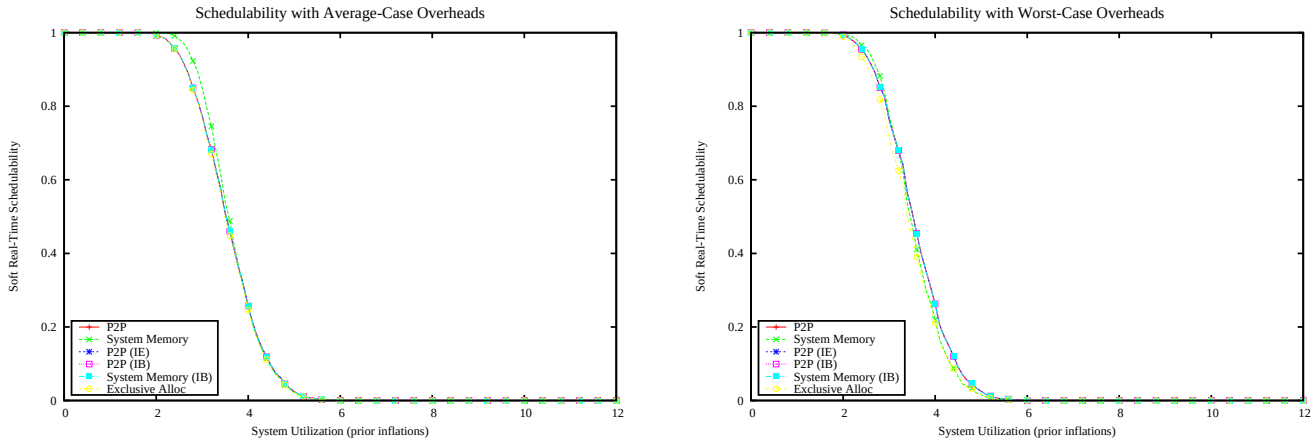

Figure 1310: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

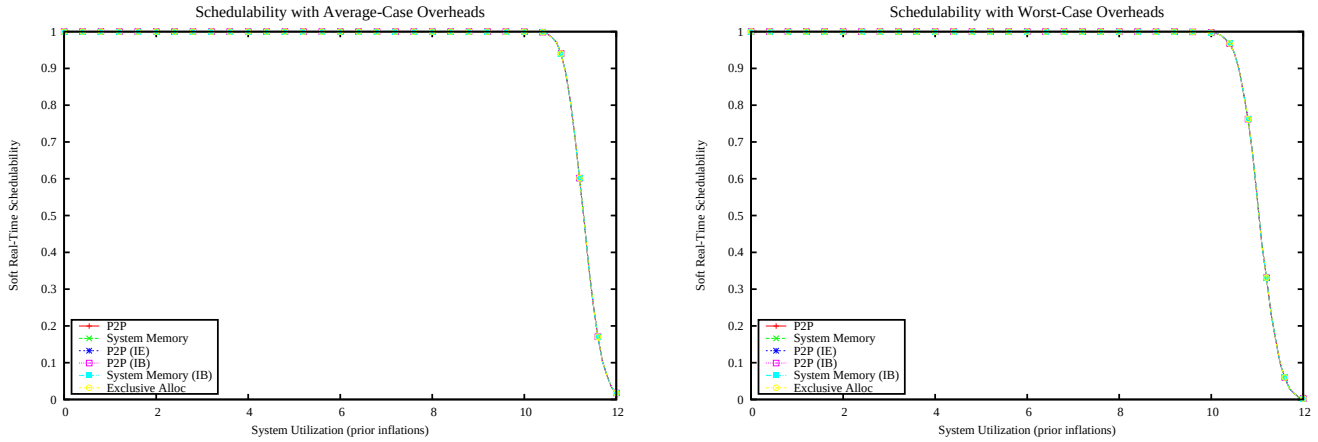

Figure 1311: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

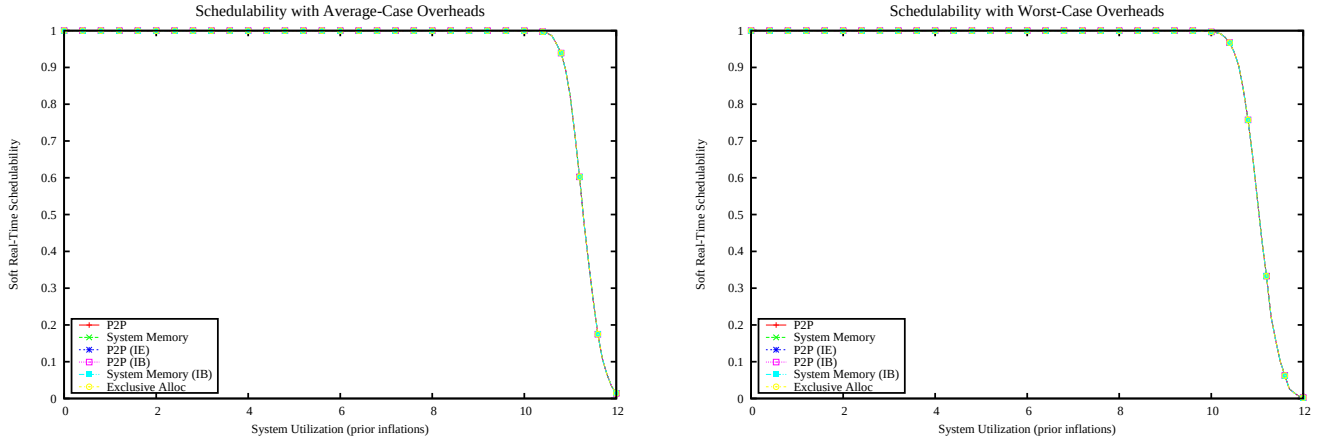

Figure 1312: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

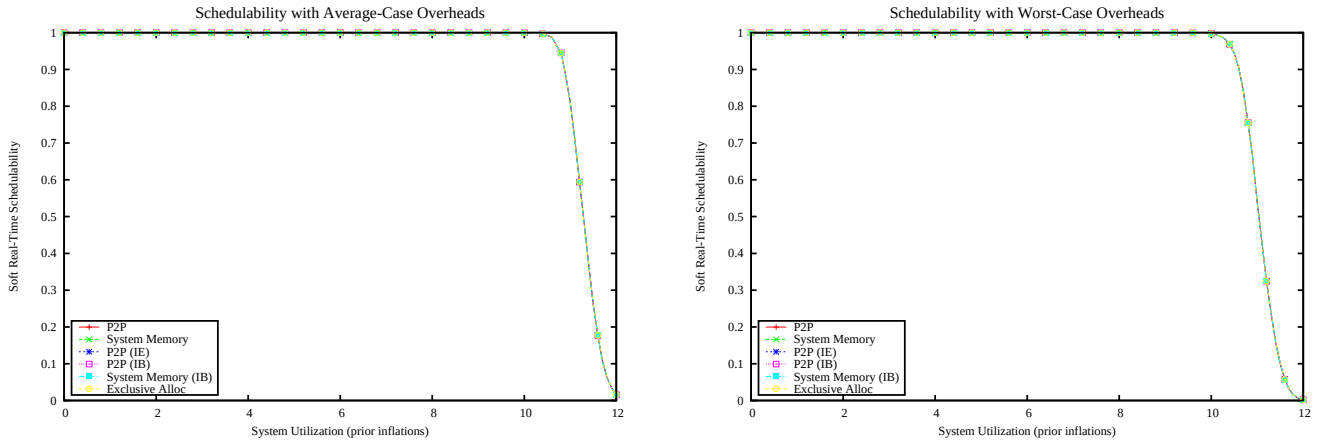

Figure 1313: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

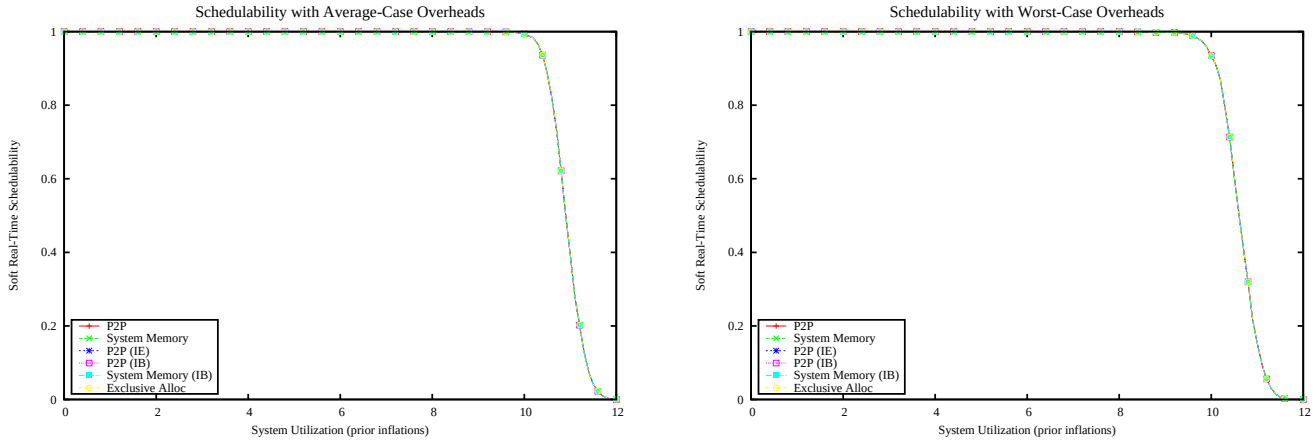

Figure 1314: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

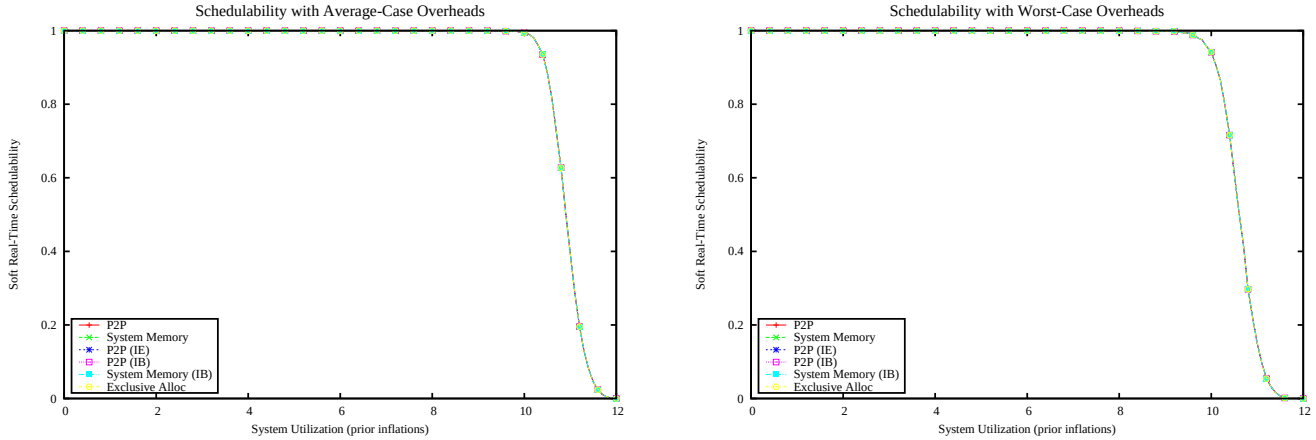

Figure 1315: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

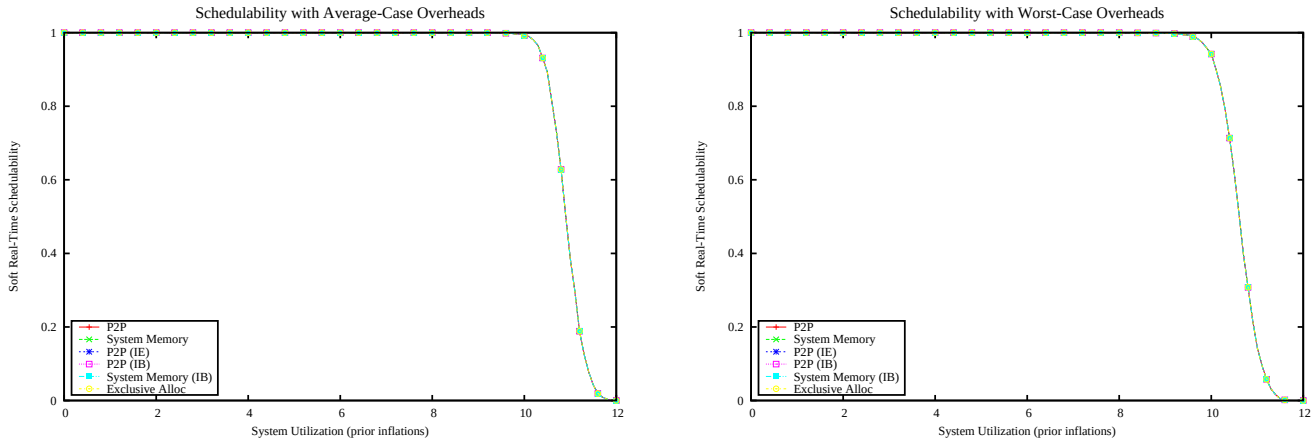

Figure 1316: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

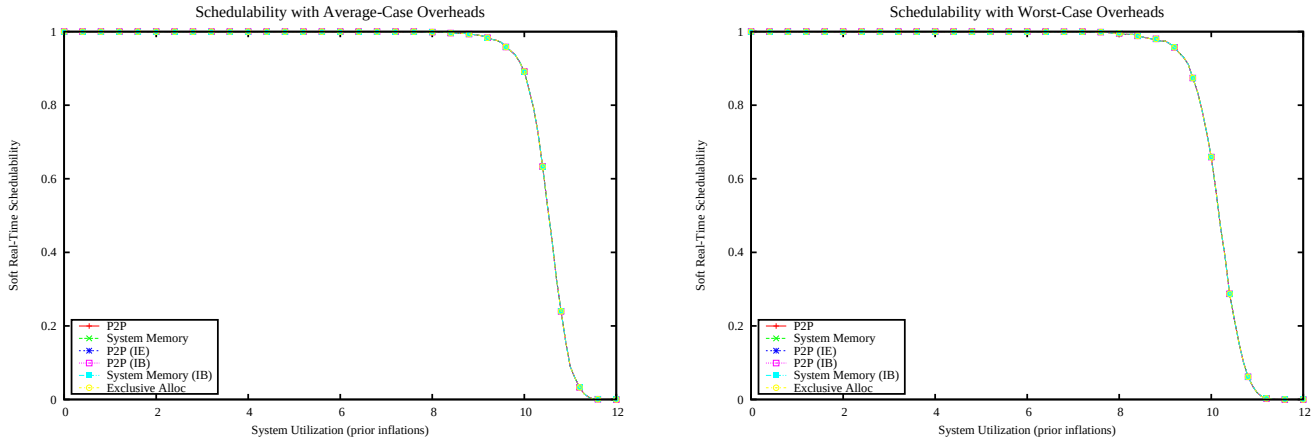

Figure 1317: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

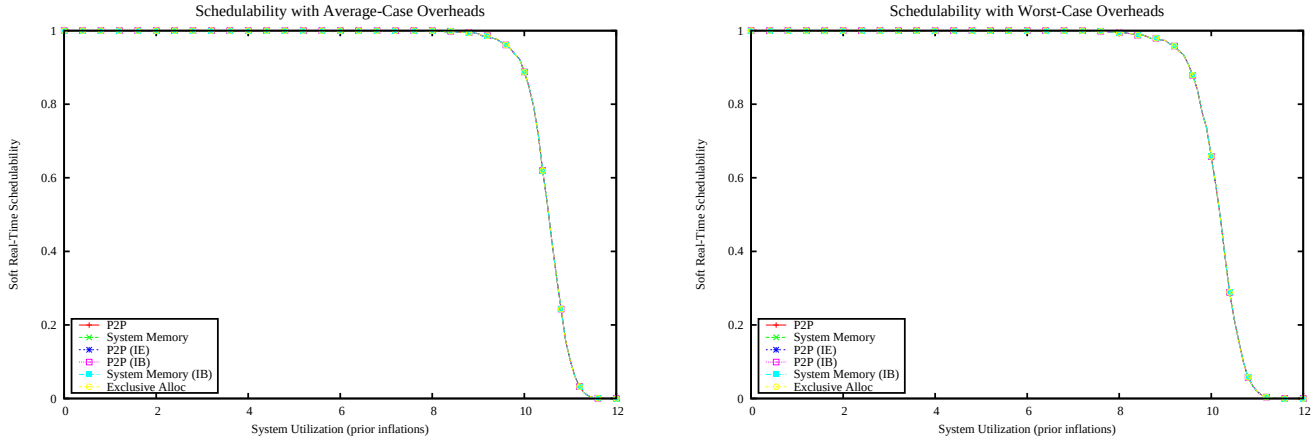

Figure 1318: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

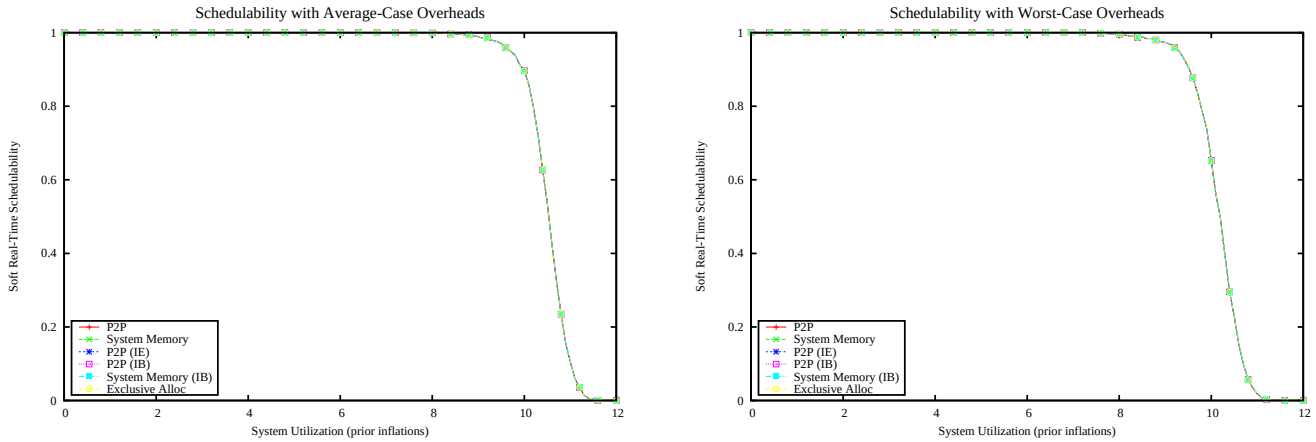

Figure 1319: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

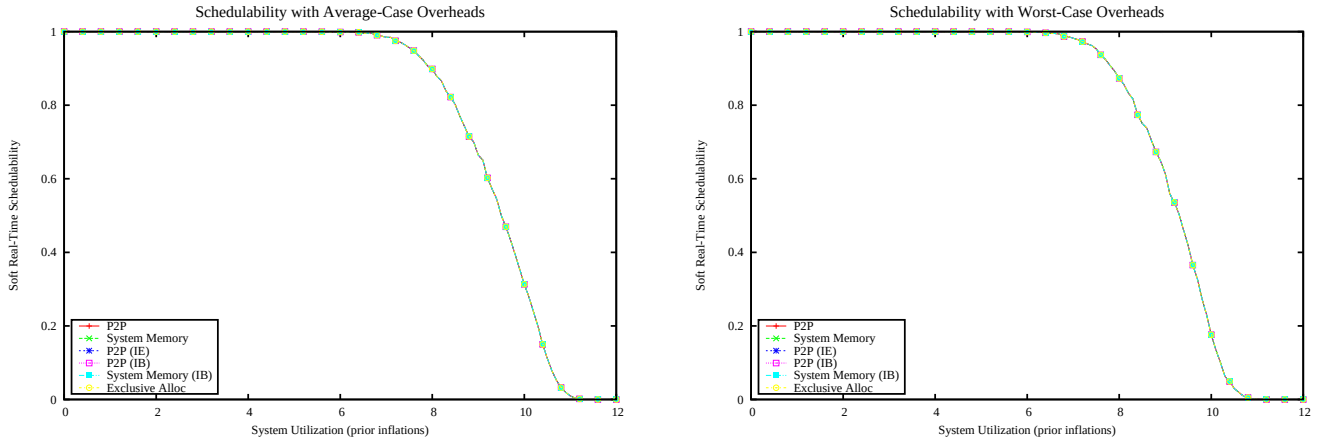

Figure 1320: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

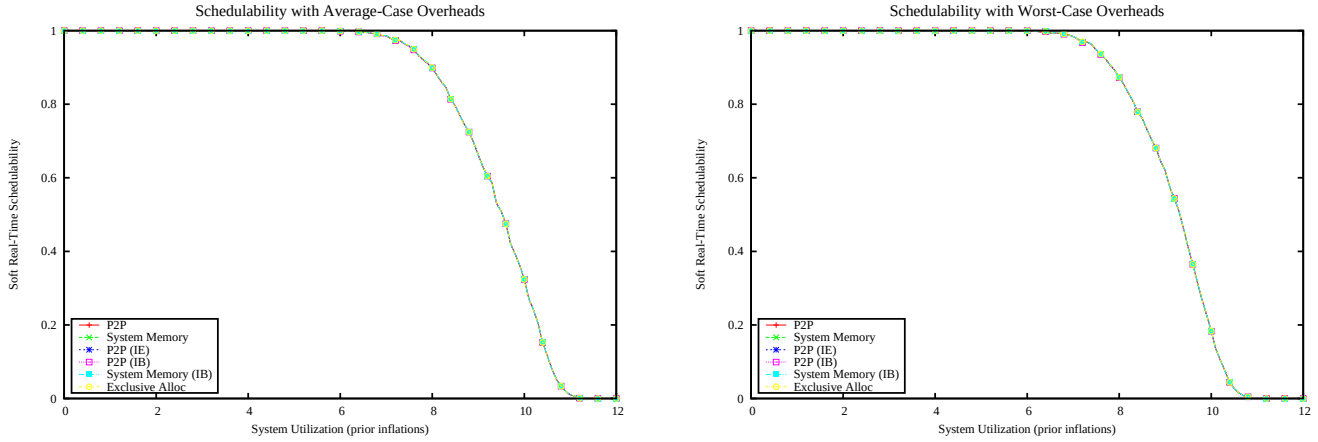

Figure 1321: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

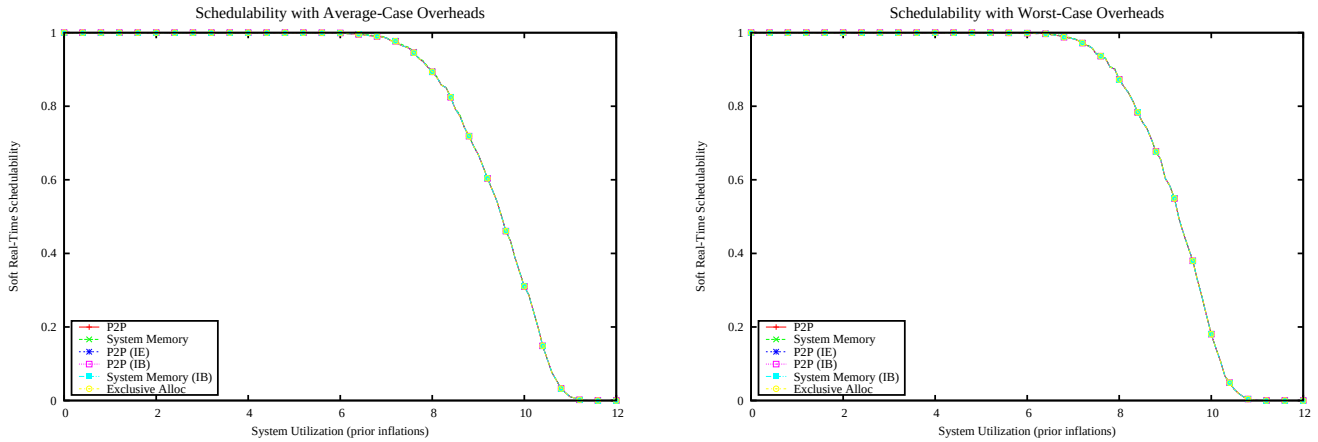

Figure 1322: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

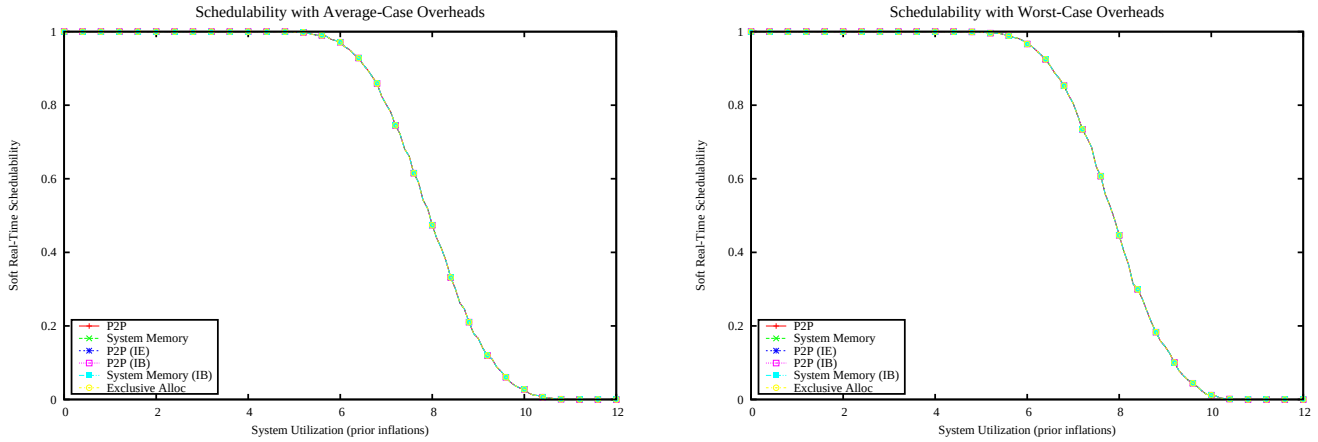

Figure 1323: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

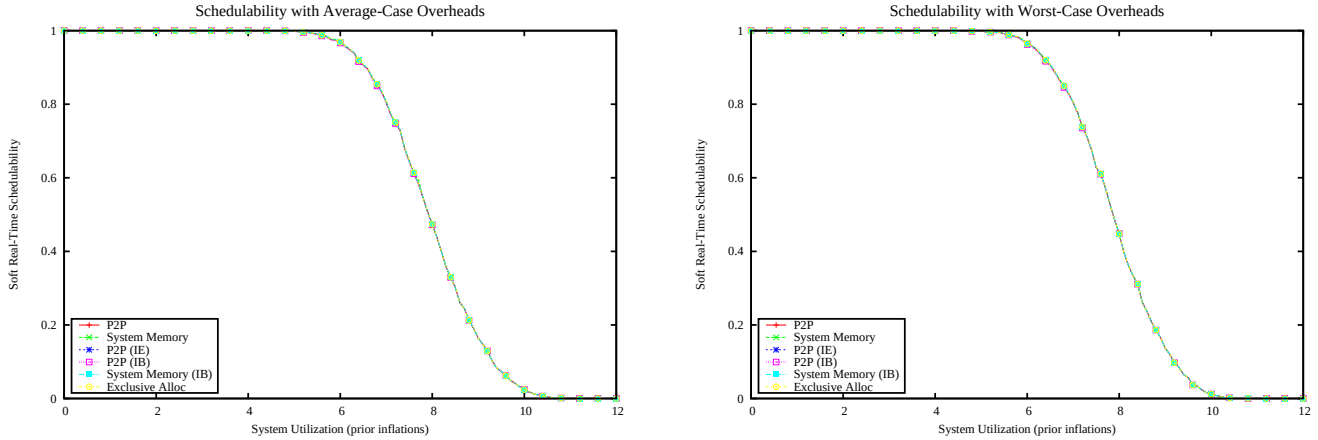

Figure 1324: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

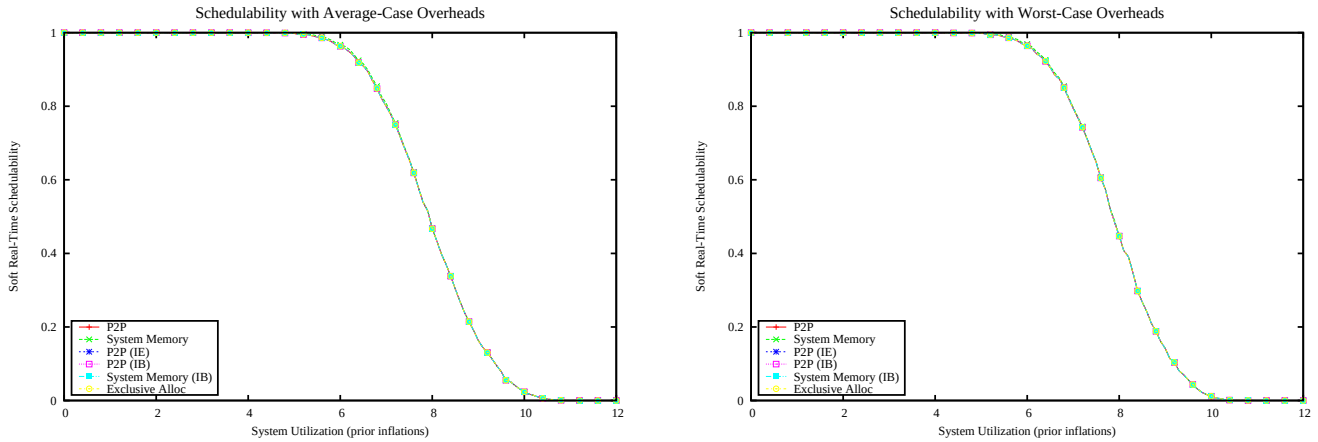

Figure 1325: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

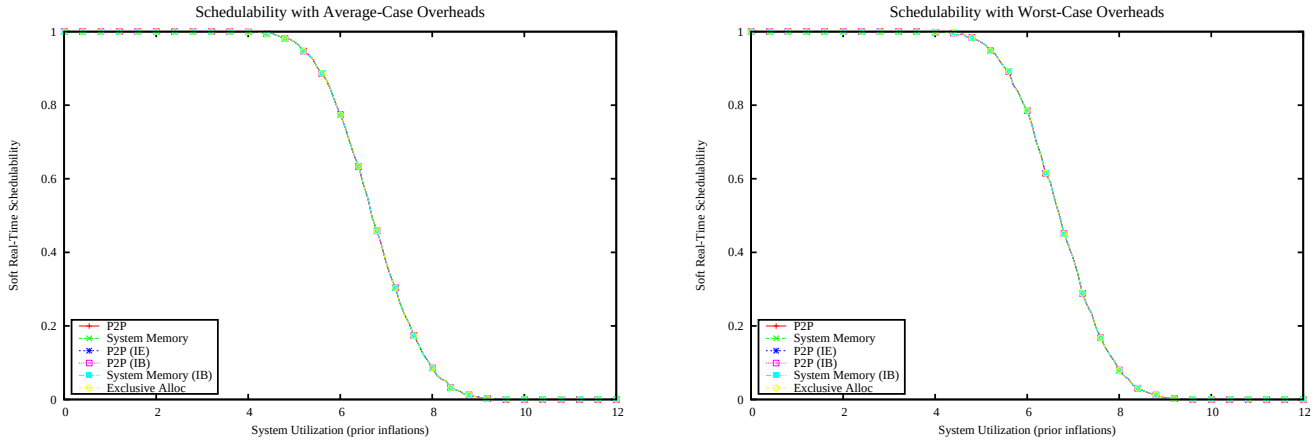

Figure 1326: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

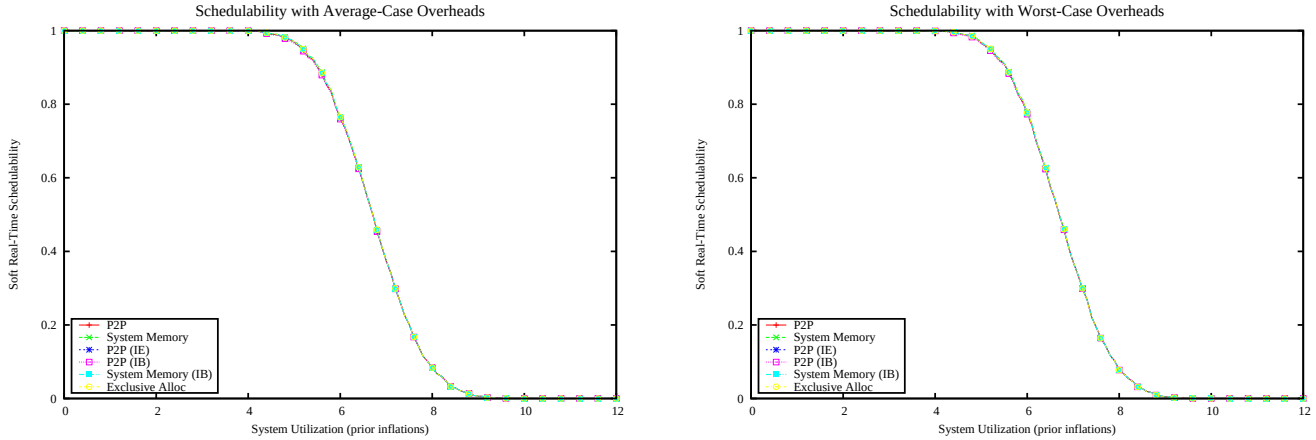

Figure 1327: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

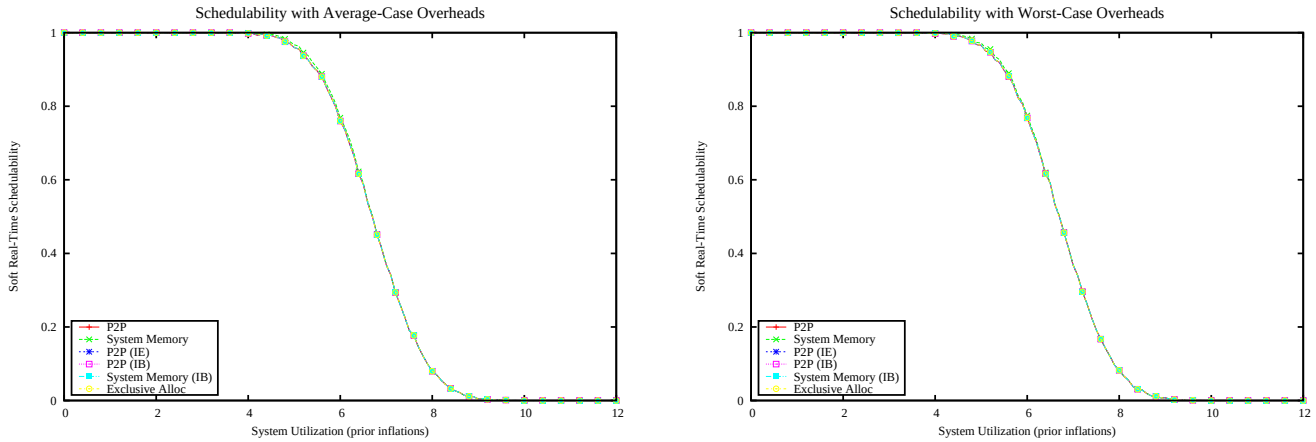

Figure 1328: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

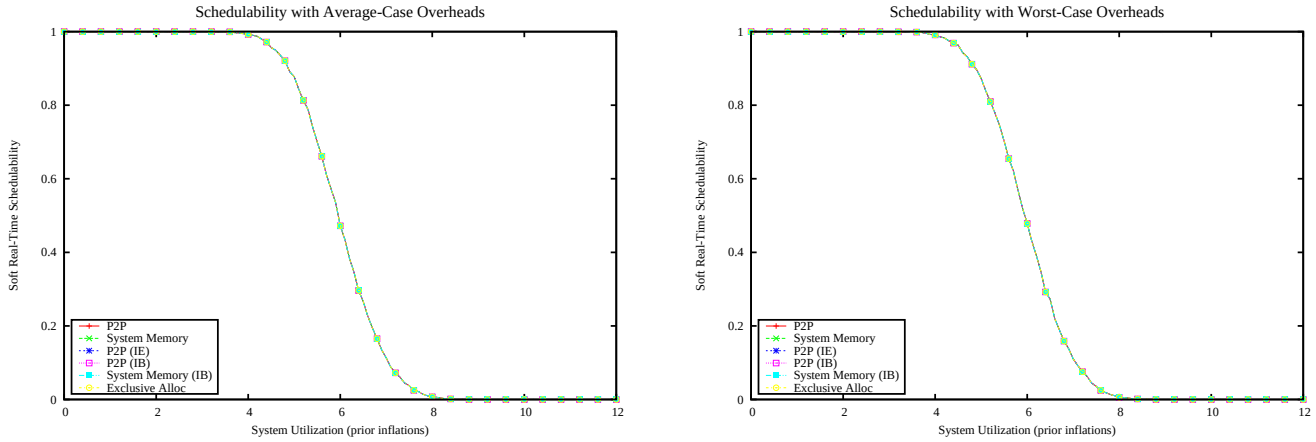

Figure 1329: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

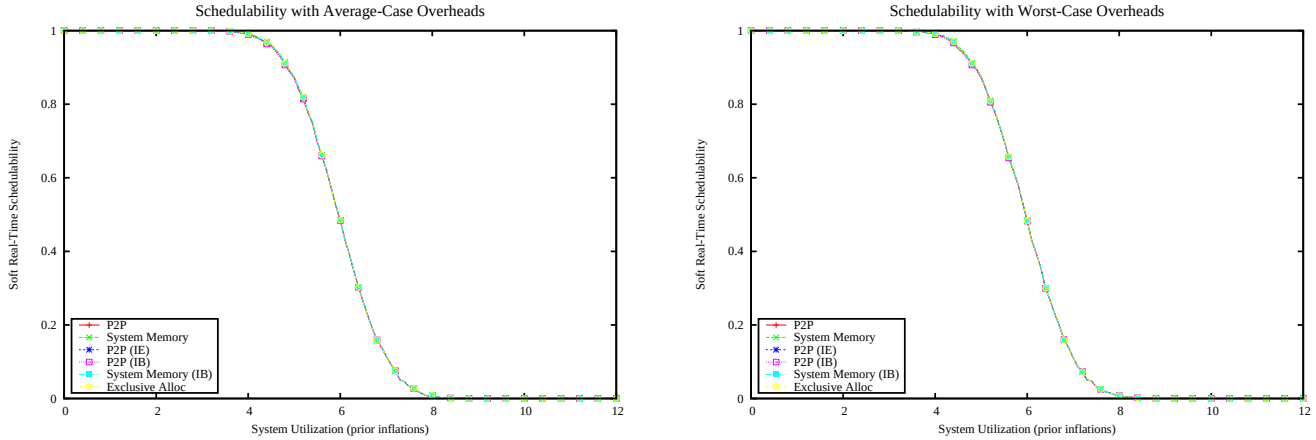

Figure 1330: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

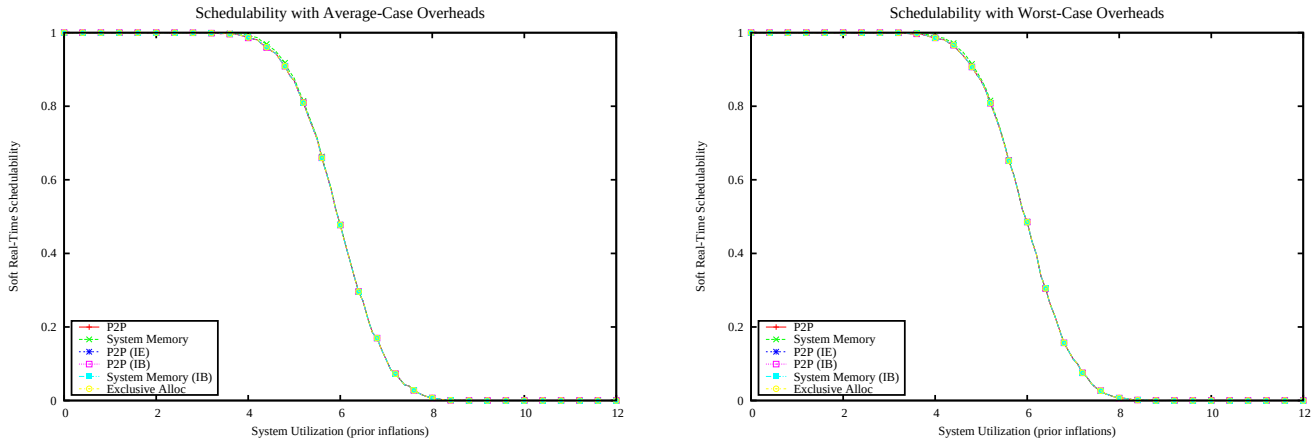

Figure 1331: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

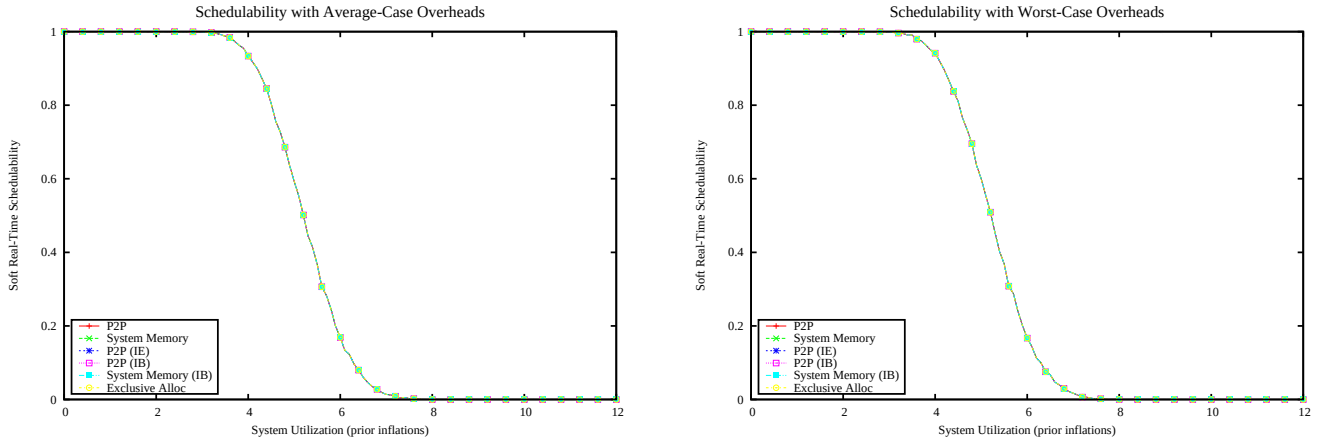

Figure 1332: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

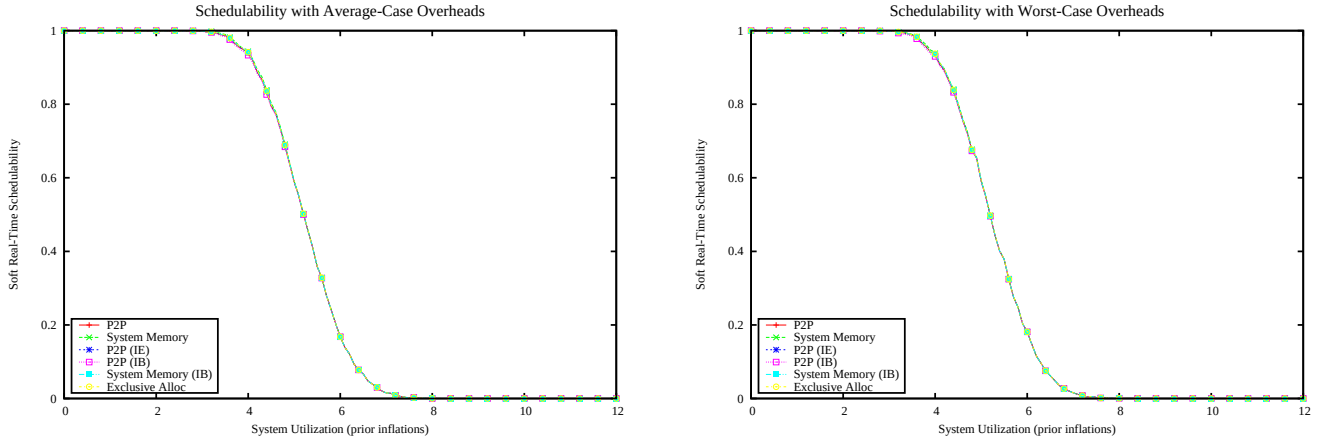

Figure 1333: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

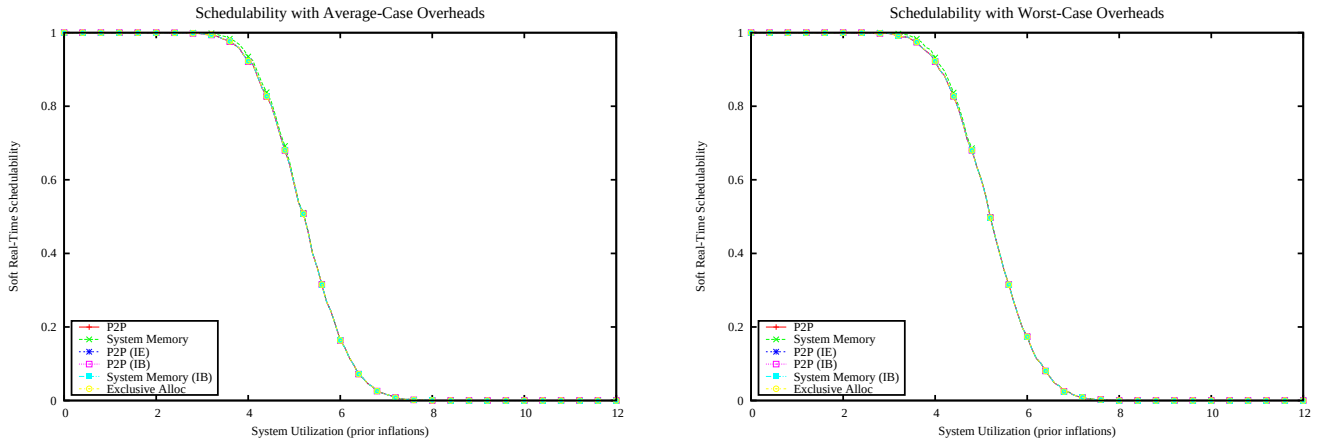

Figure 1334: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

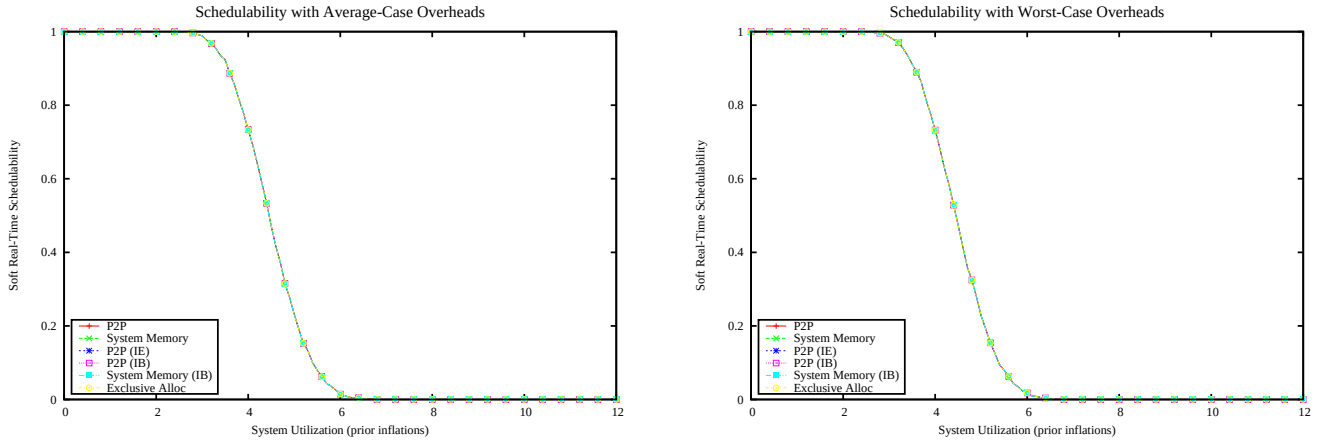

Figure 1335: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

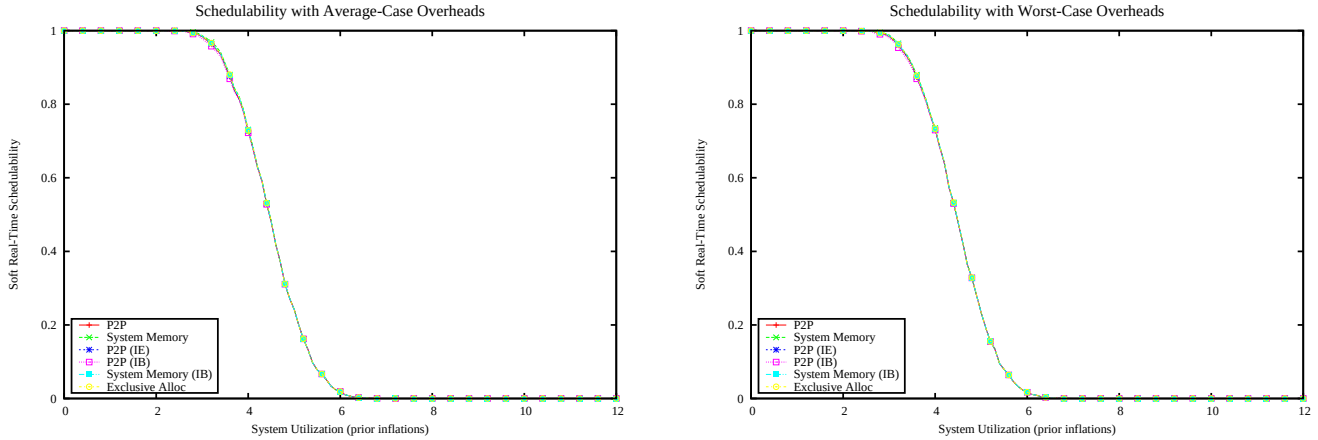

Figure 1336: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

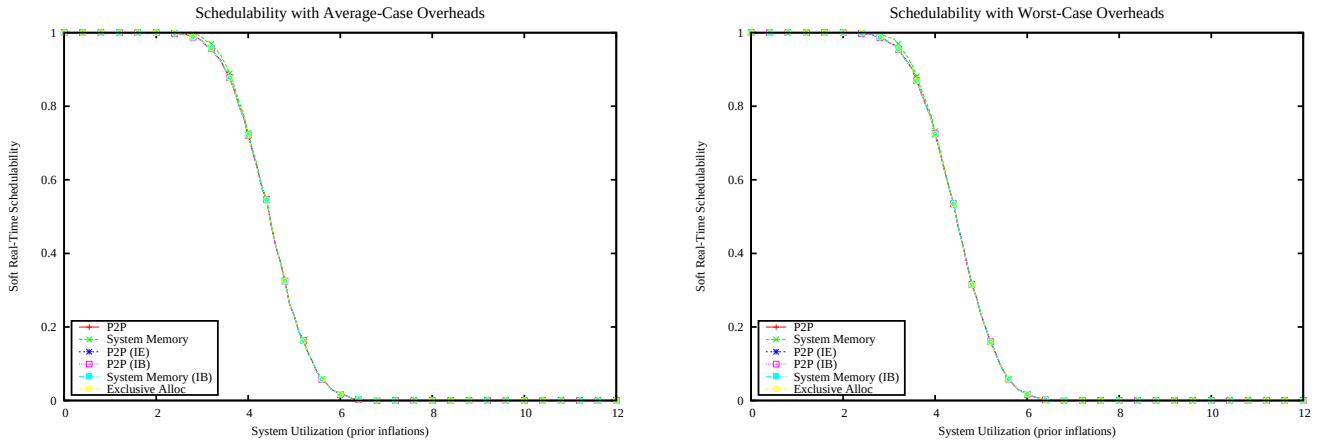

Figure 1337: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

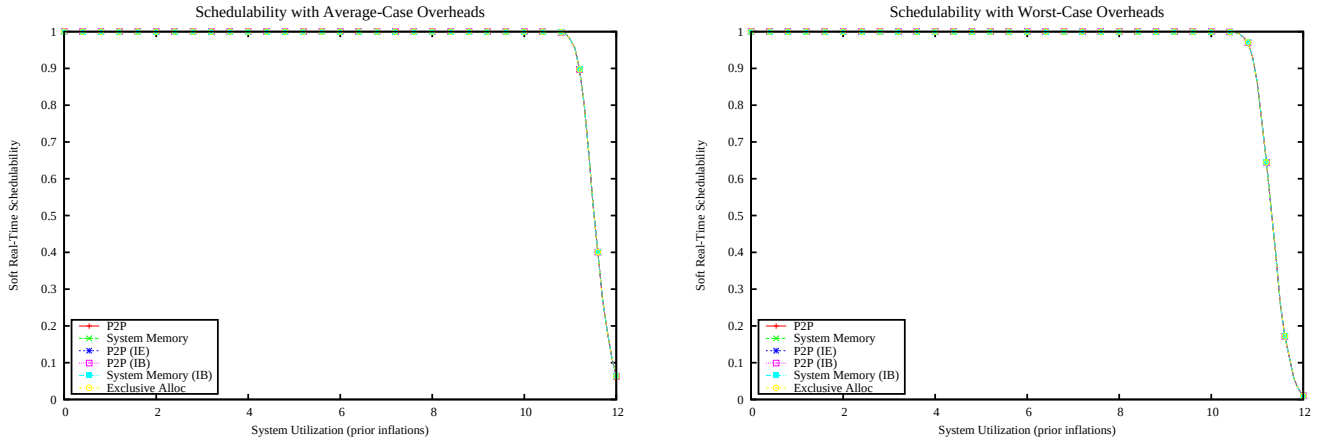

Figure 1338: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

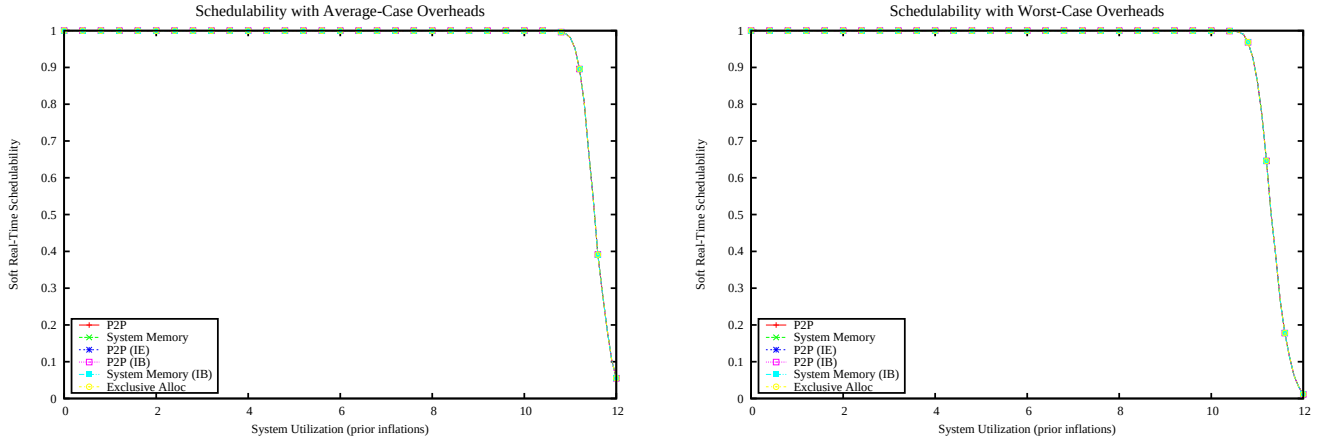

Figure 1339: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

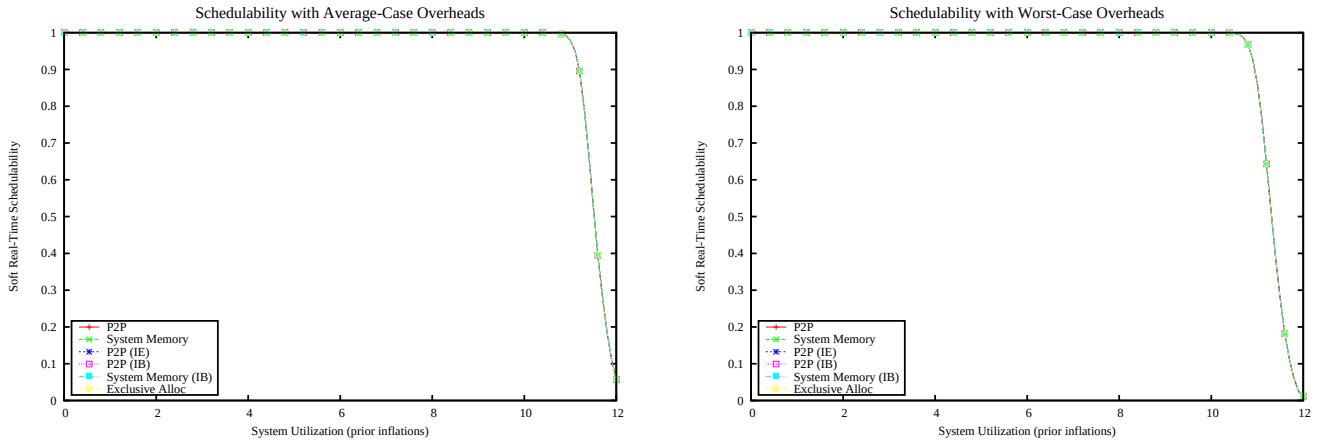

Figure 1340: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

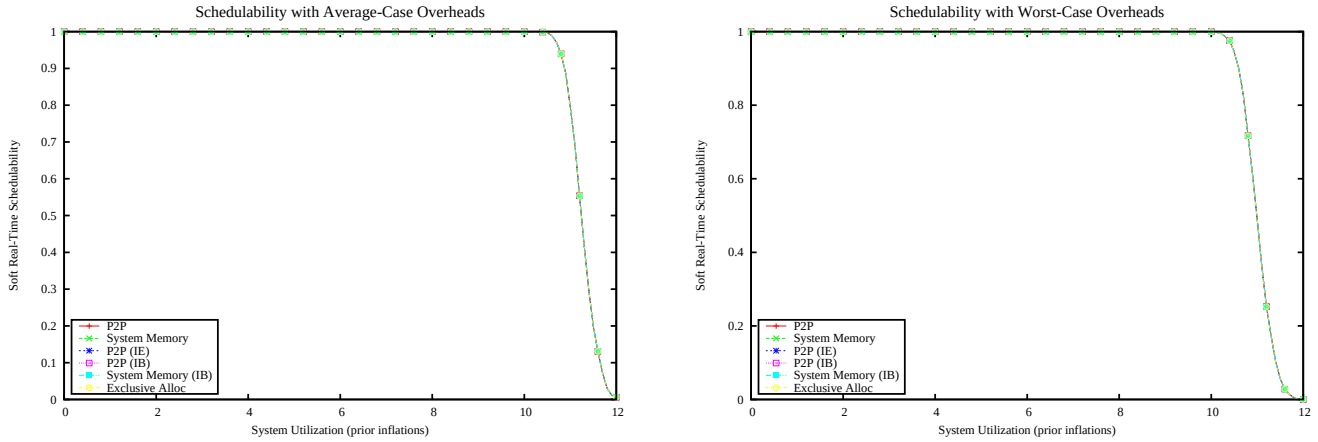

Figure 1341: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

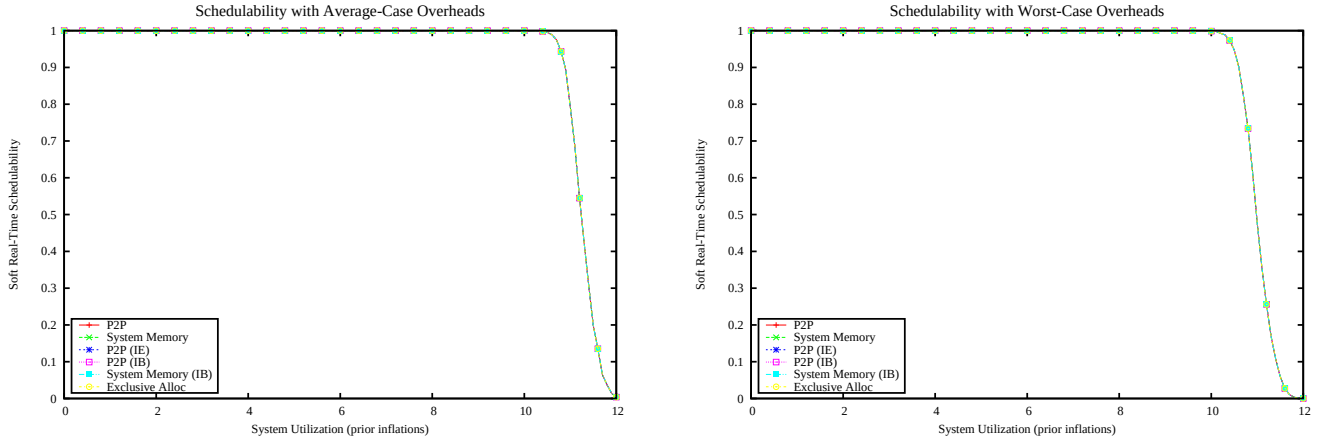

Figure 1342: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

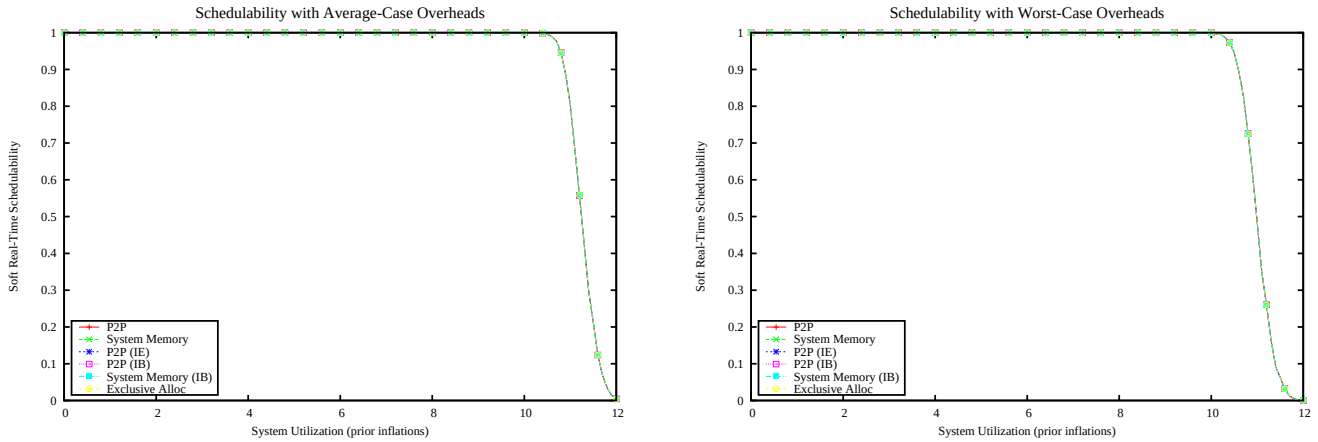

Figure 1343: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

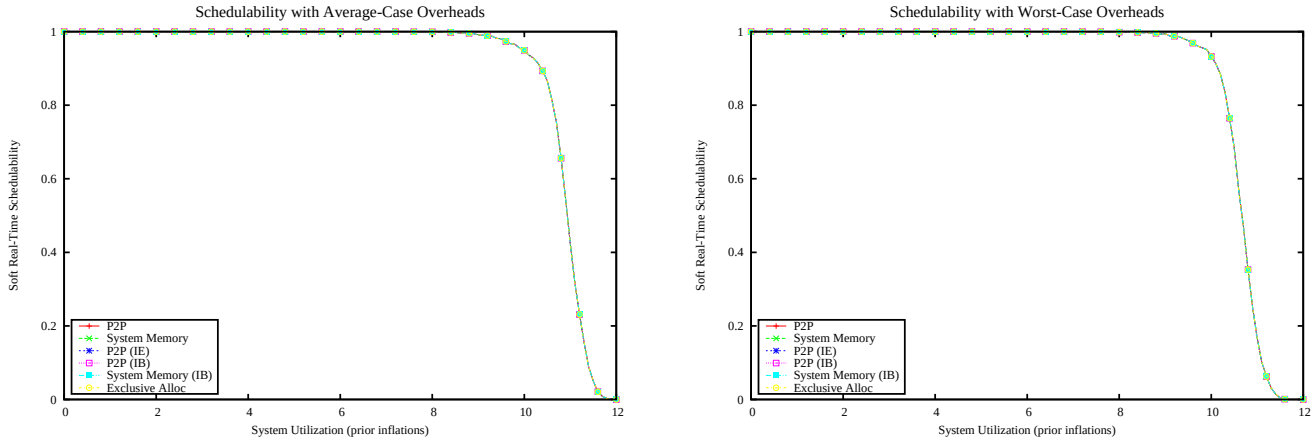

Figure 1344: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

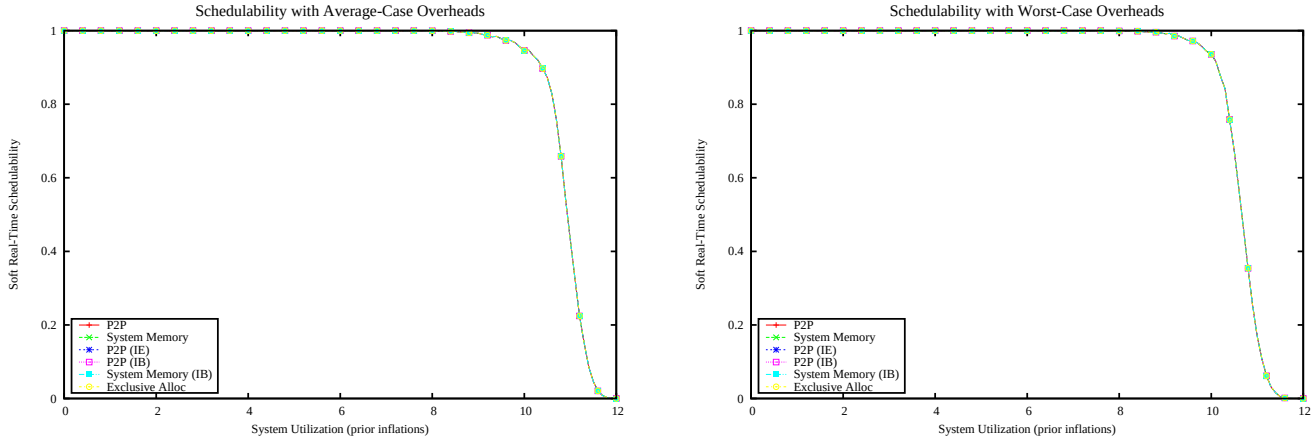

Figure 1345: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

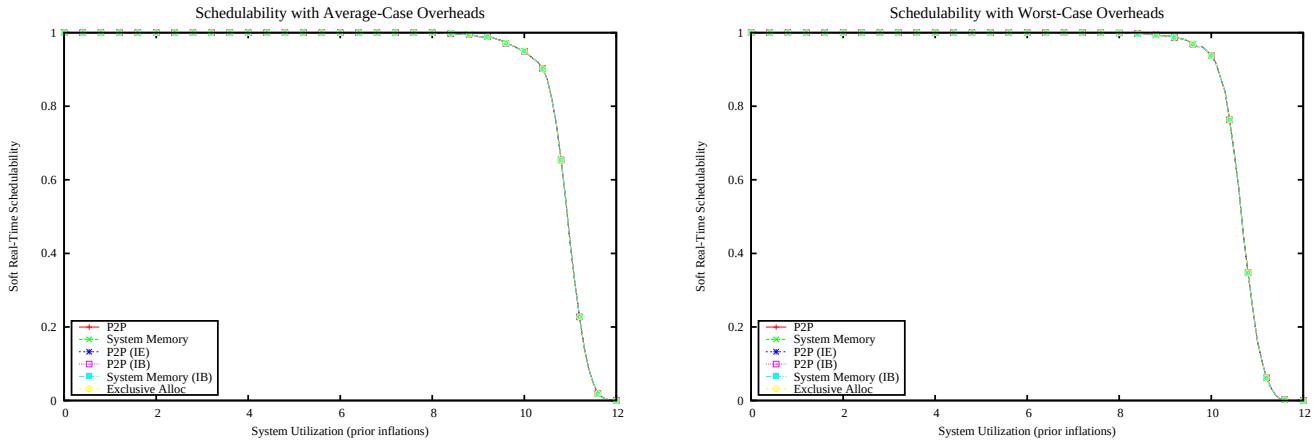

Figure 1346: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

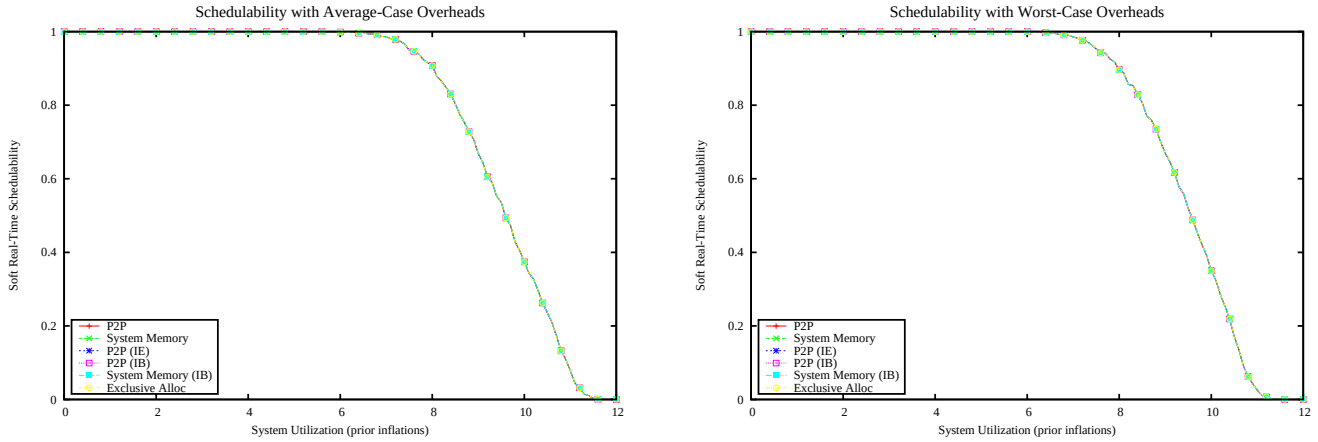

Figure 1347: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

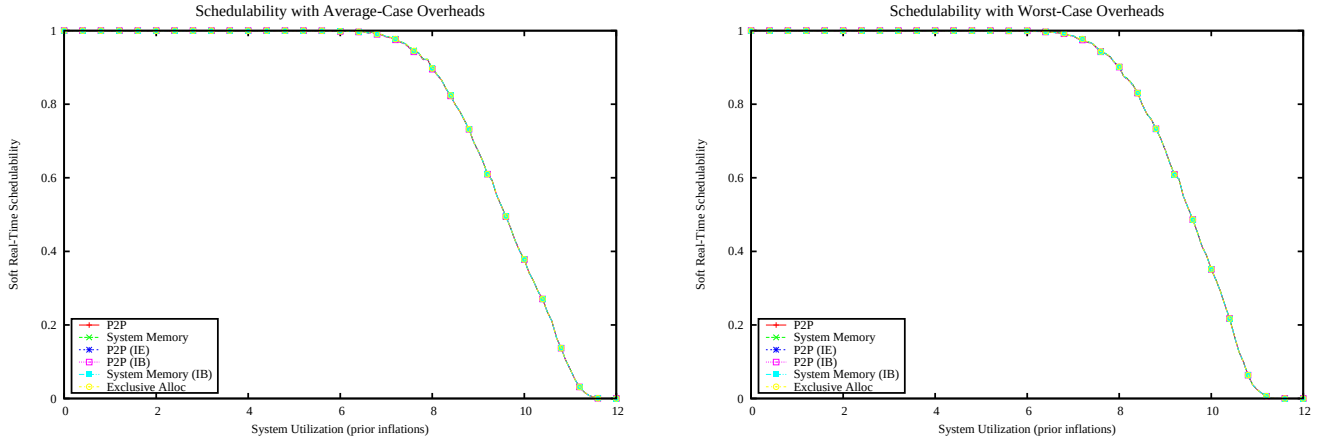

Figure 1348: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

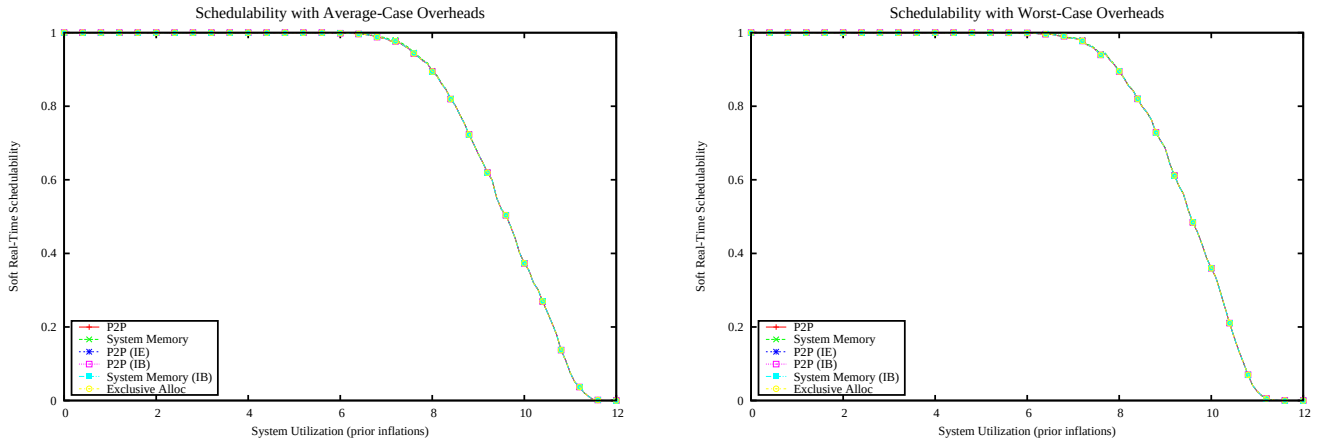

Figure 1349: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

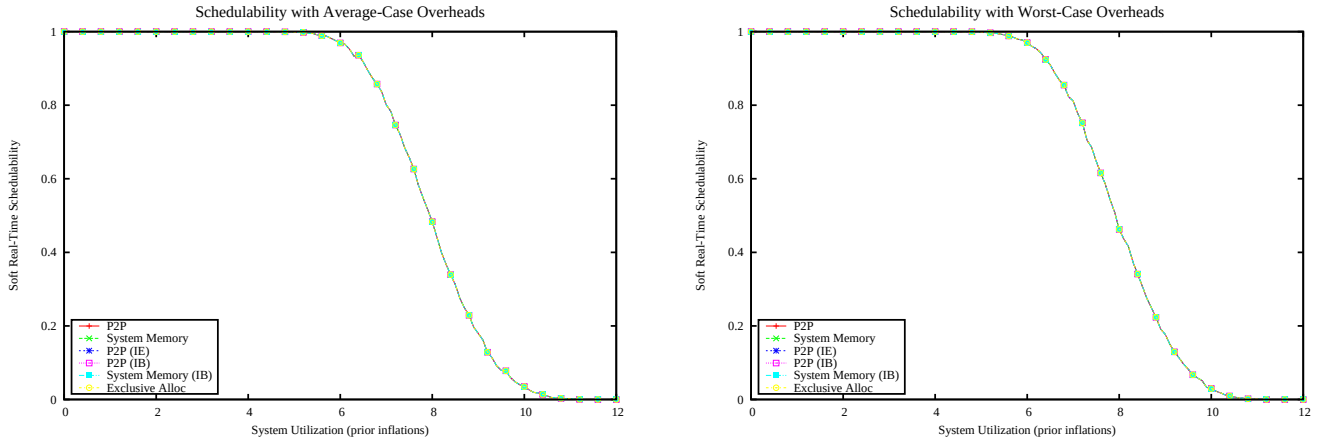

Figure 1350: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

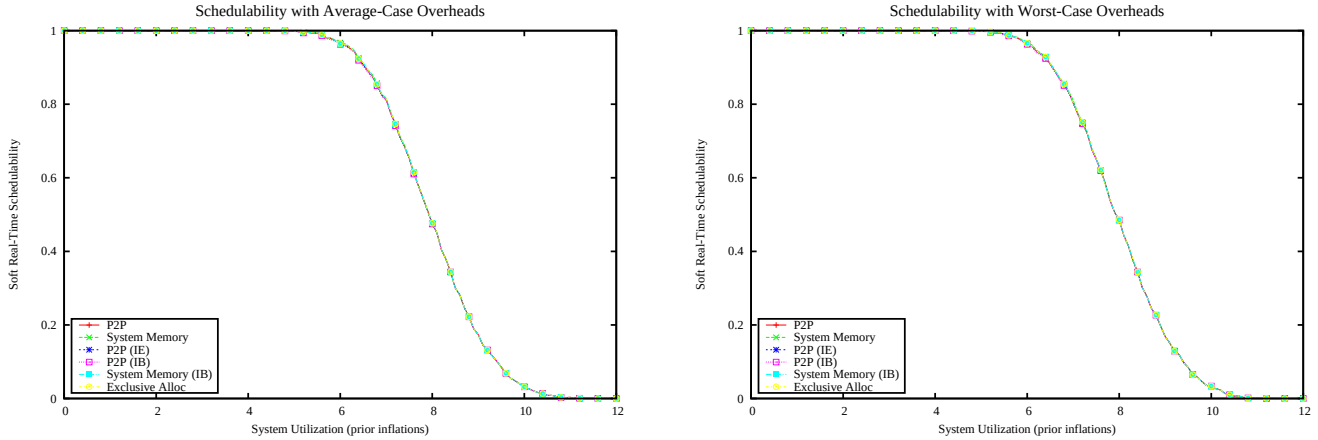

Figure 1351: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

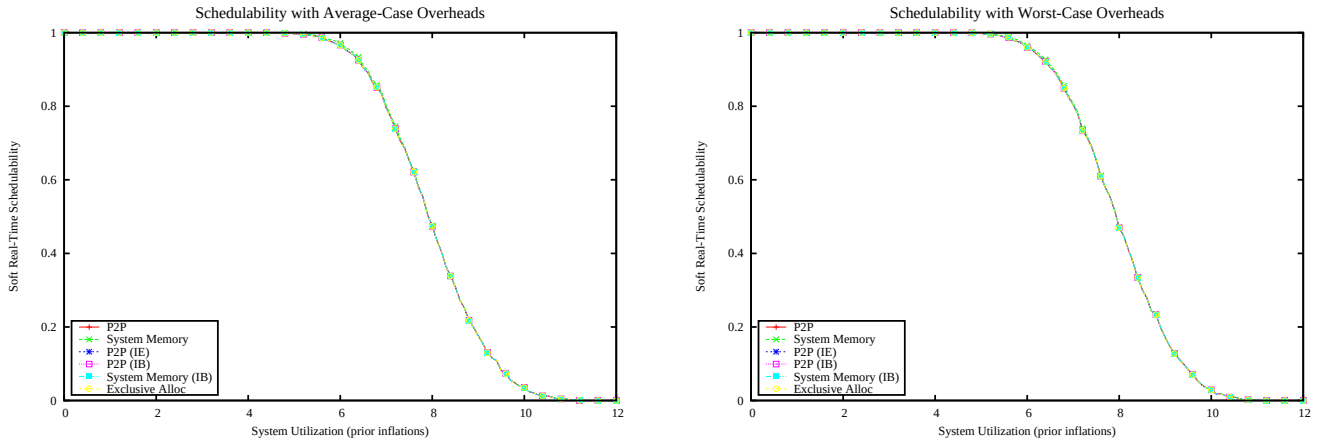

Figure 1352: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

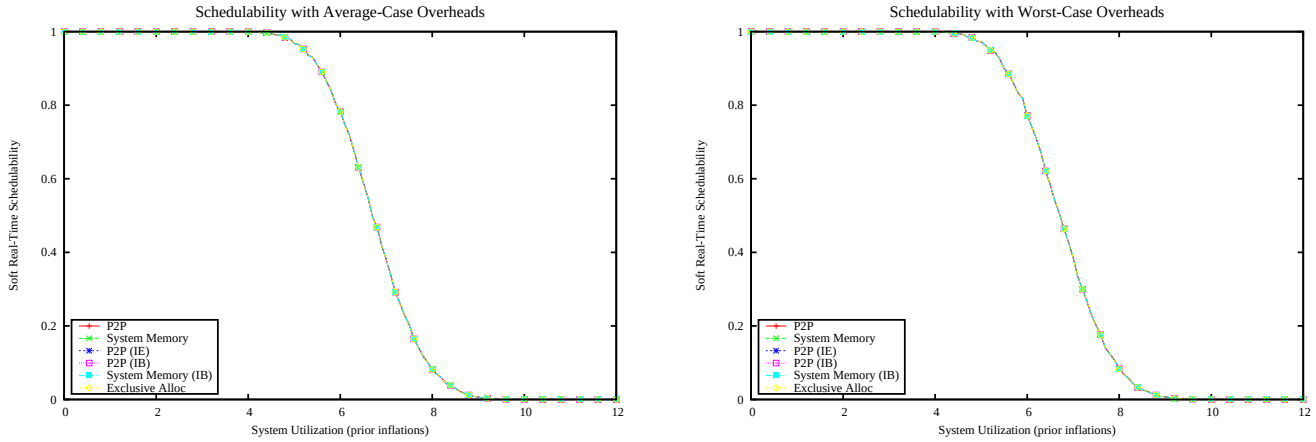

Figure 1353: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

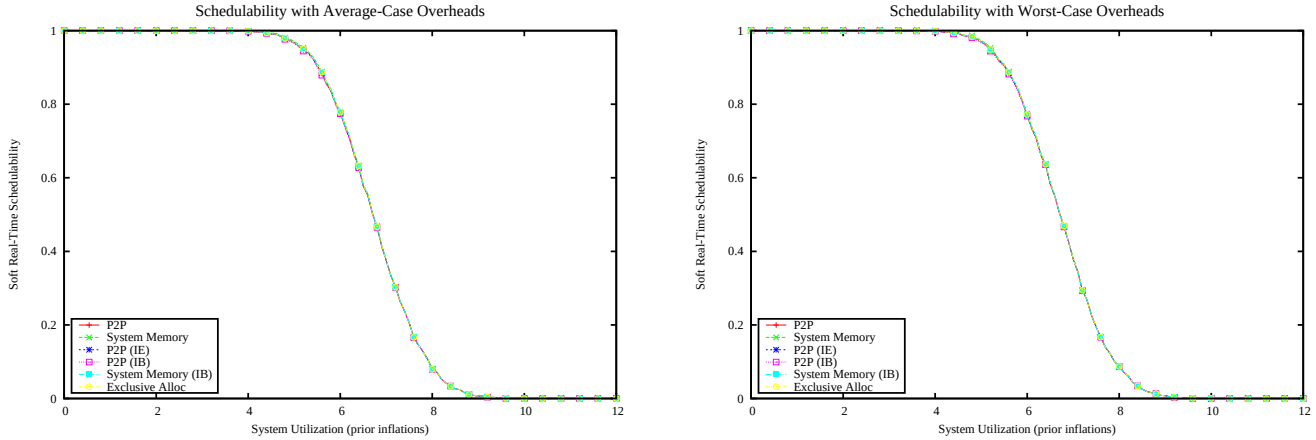

Figure 1354: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

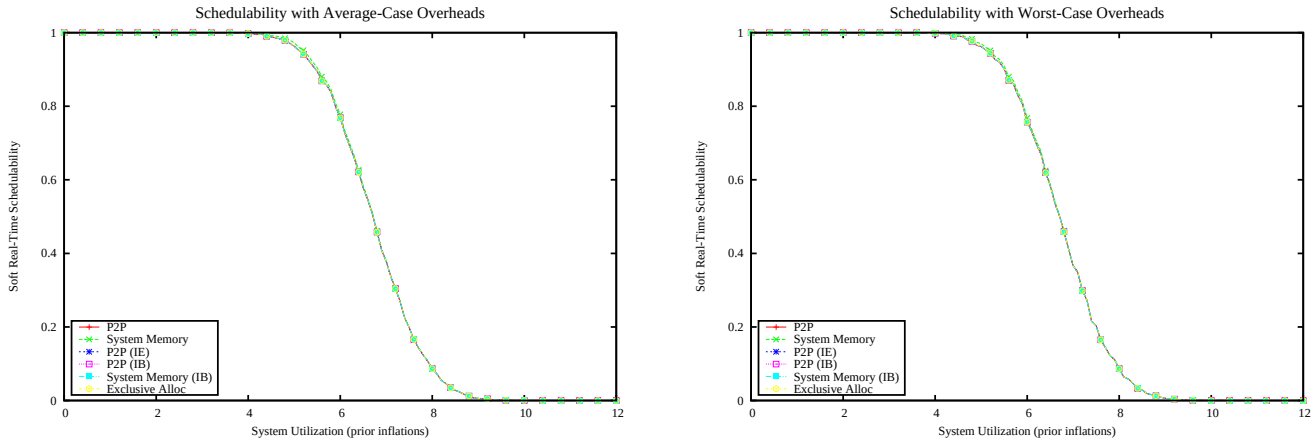

Figure 1355: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

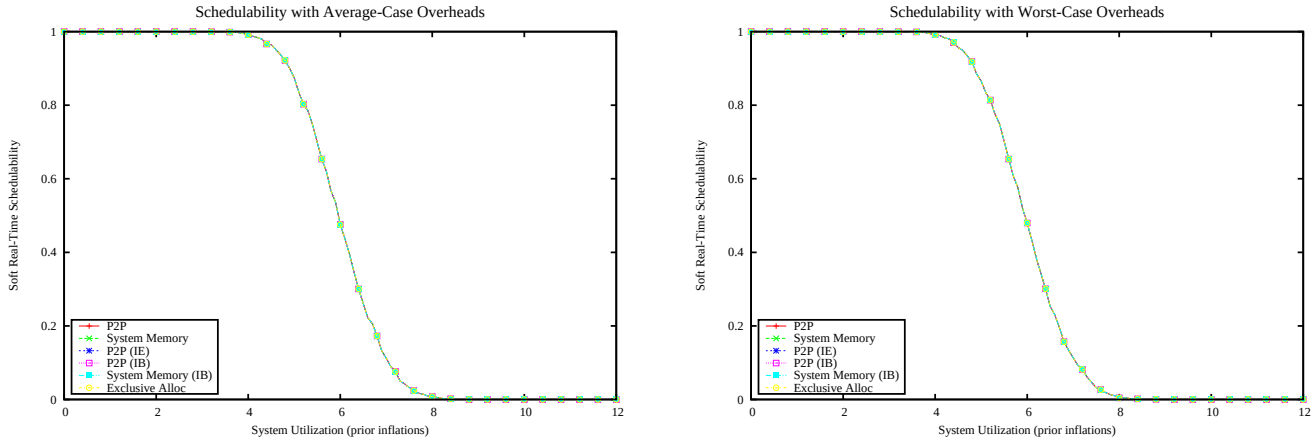

Figure 1356: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

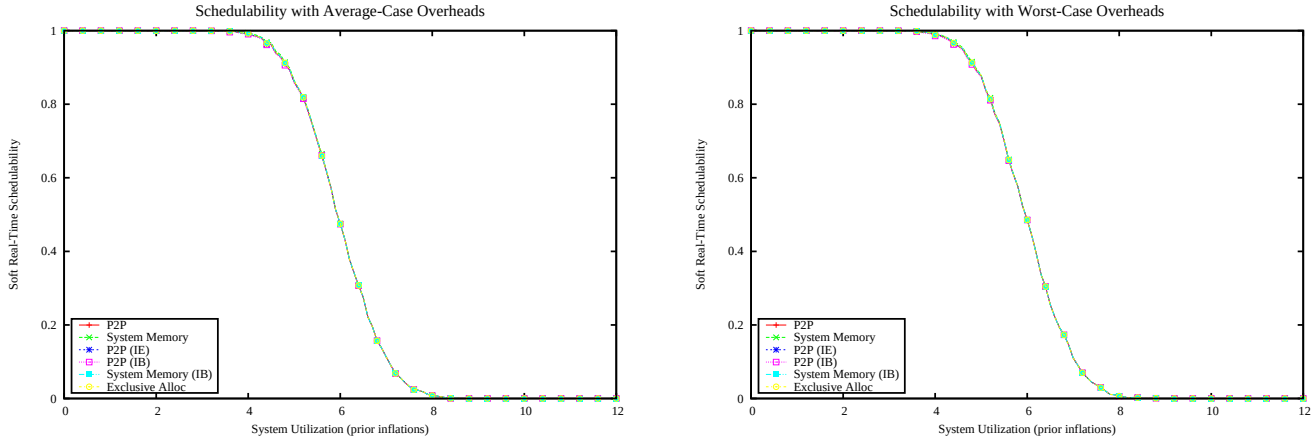

Figure 1357: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

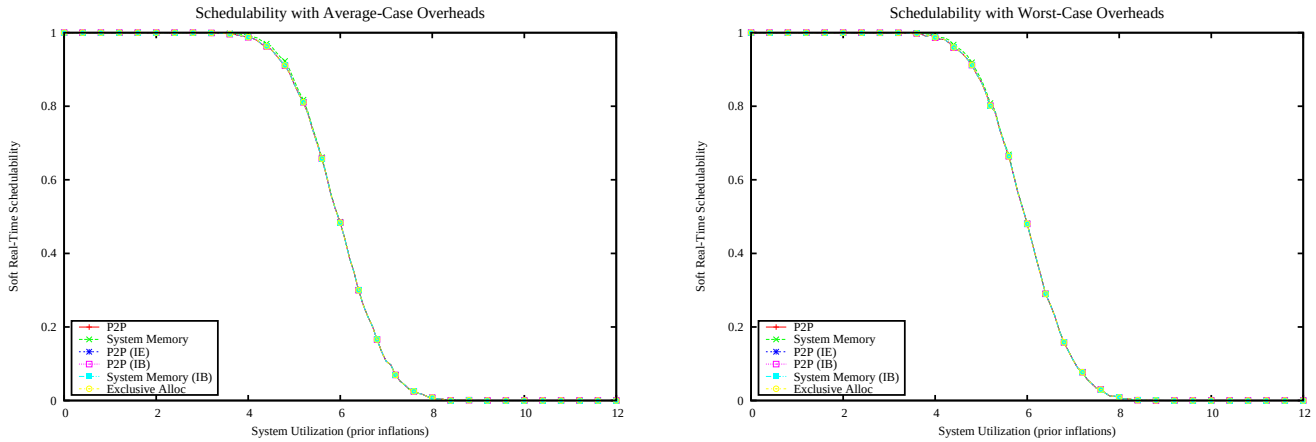

Figure 1358: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

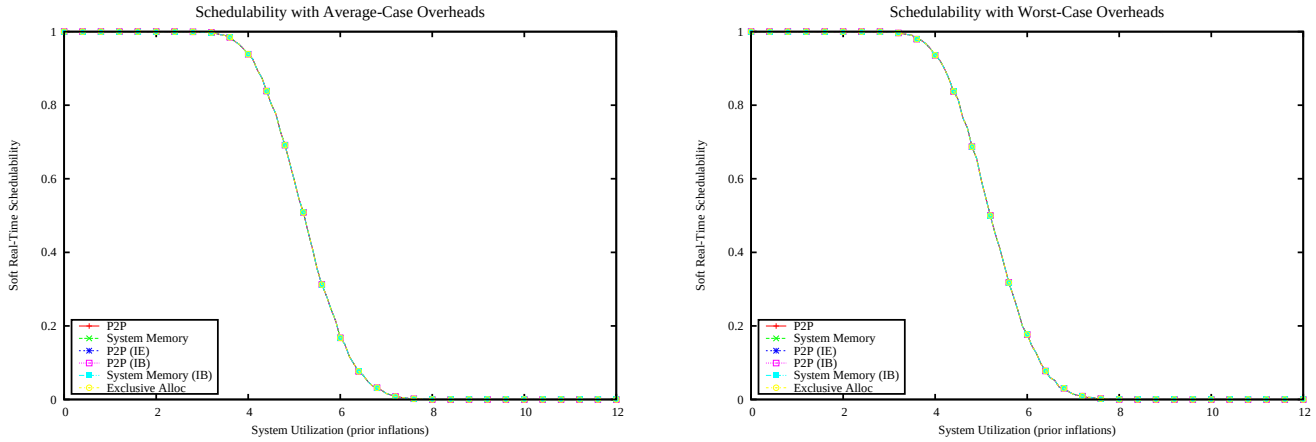

Figure 1359: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

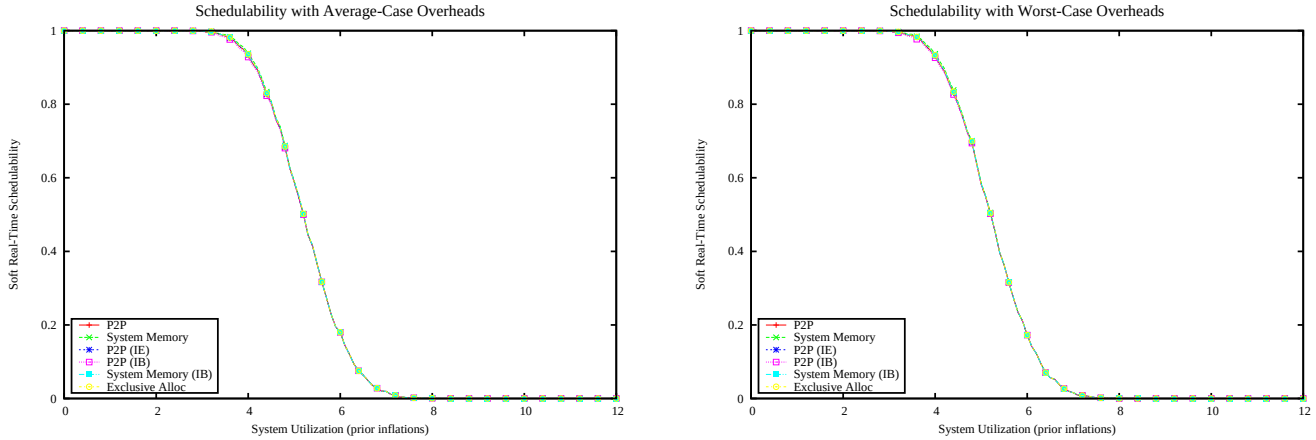

Figure 1360: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

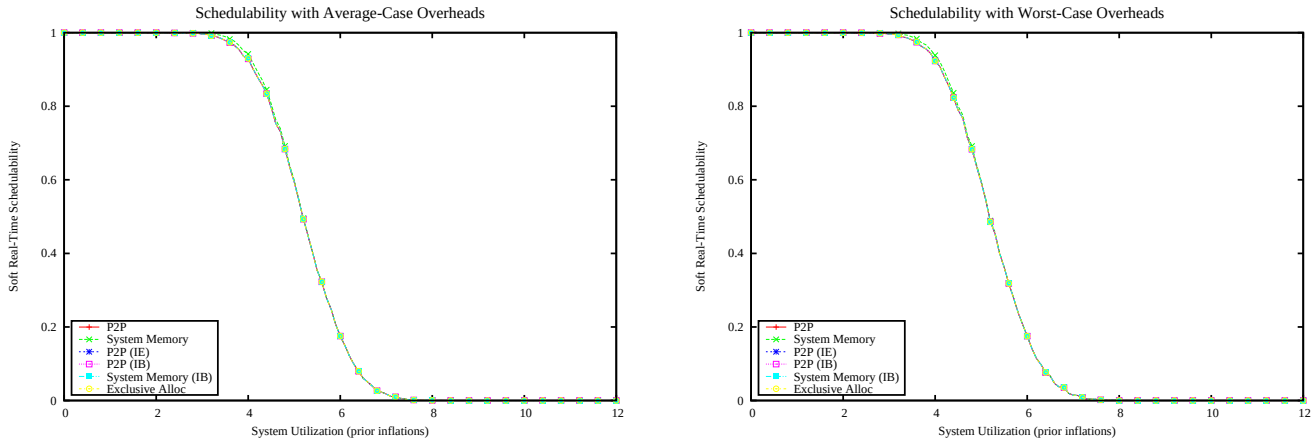

Figure 1361: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

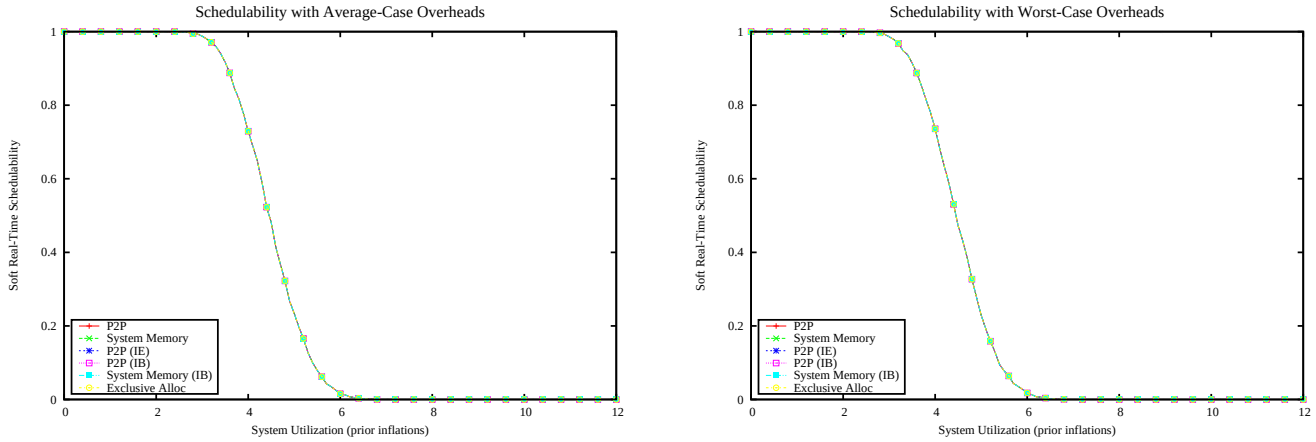

Figure 1362: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

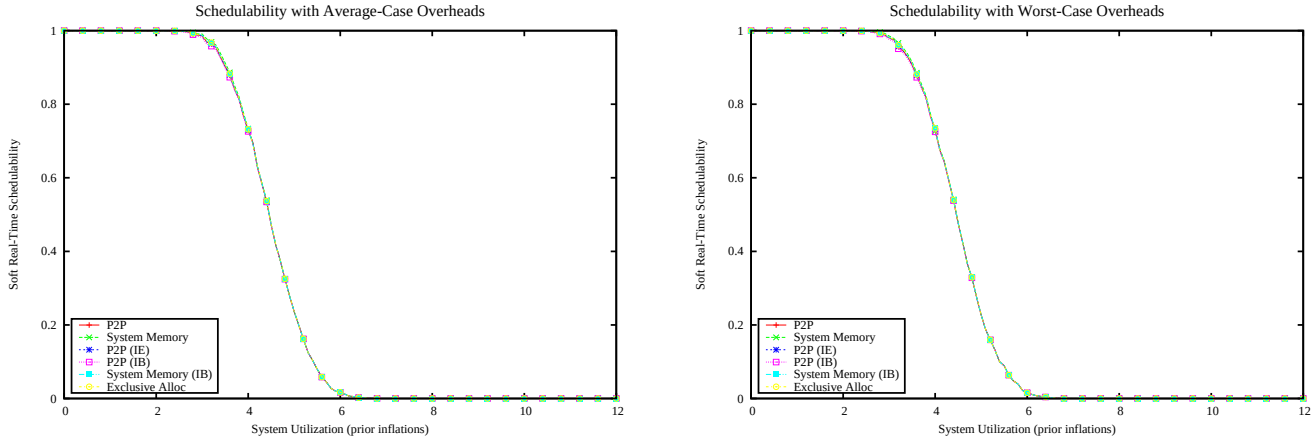

Figure 1363: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

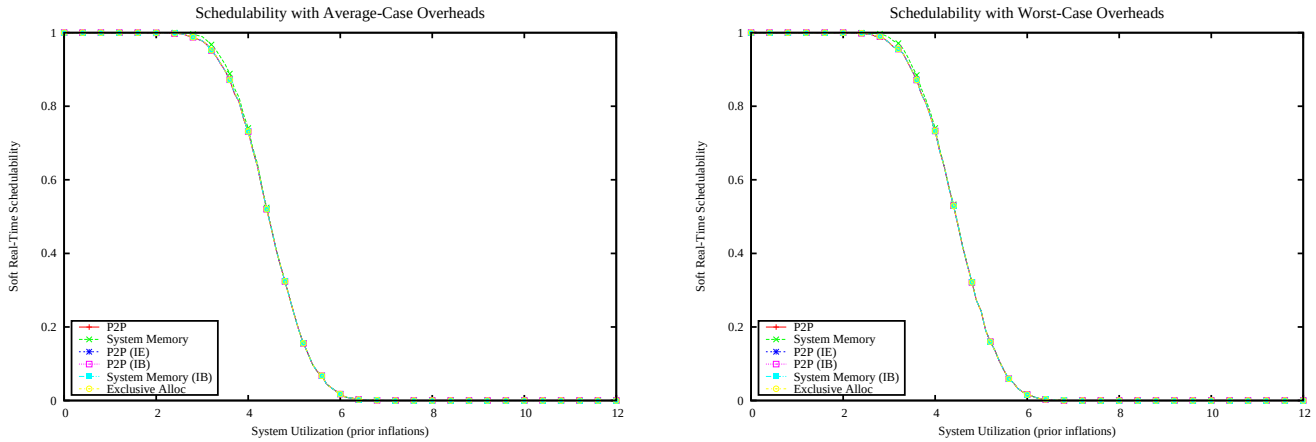

Figure 1364: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

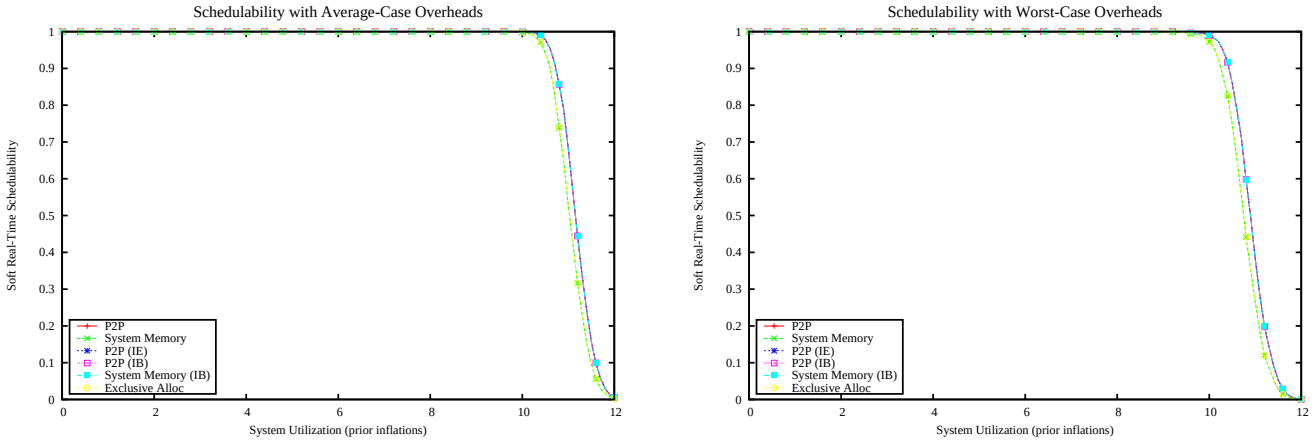

Figure 1365: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

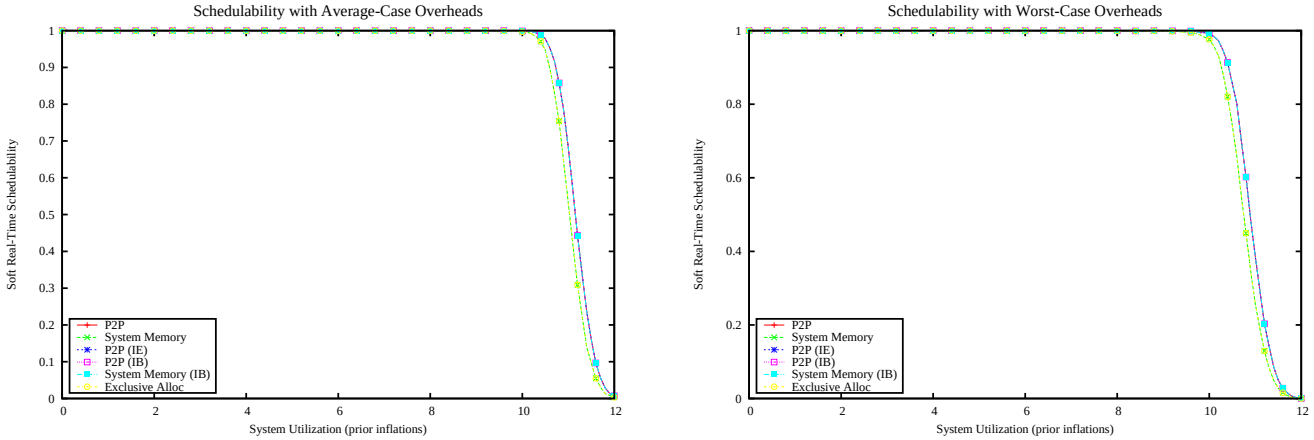

Figure 1366: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

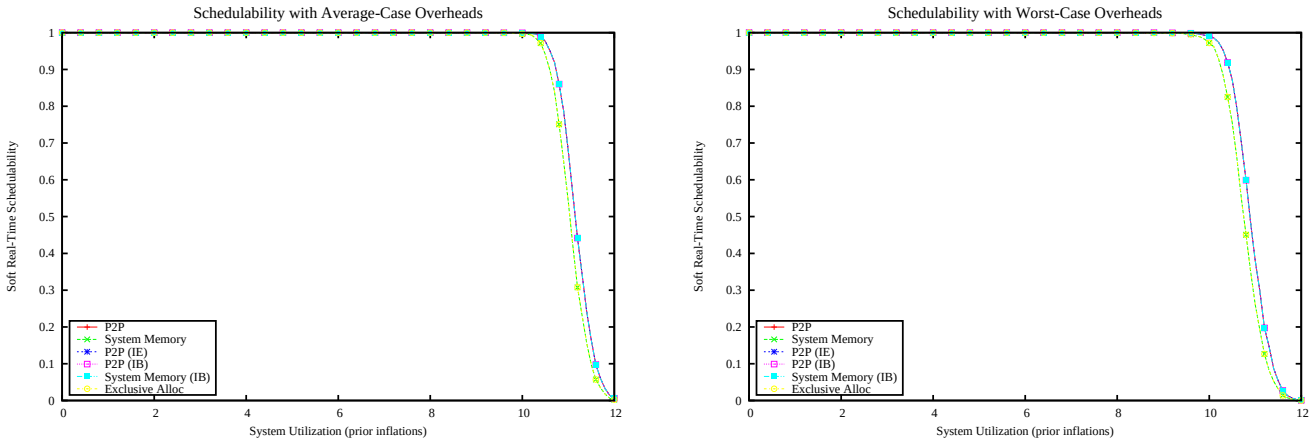

Figure 1367: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

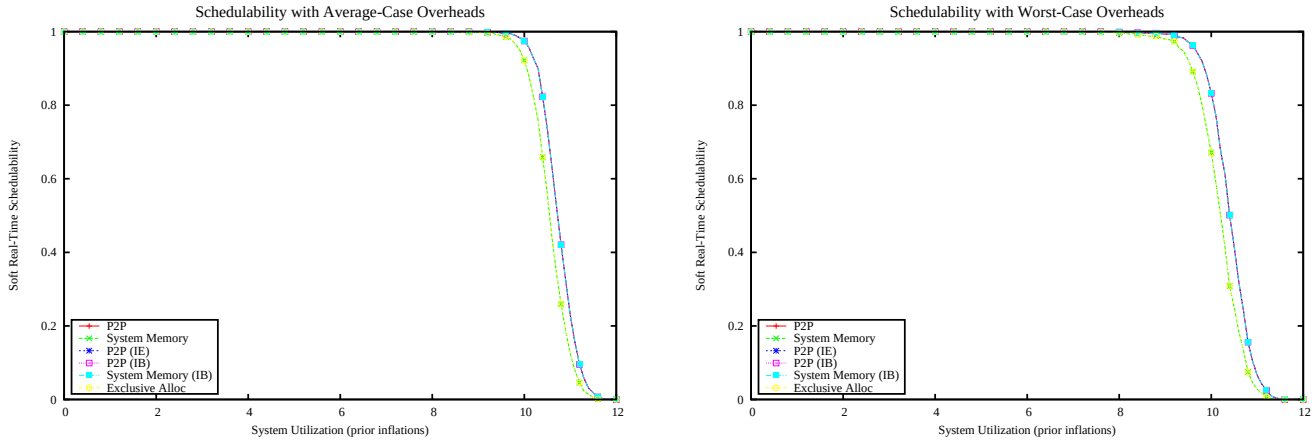

Figure 1368: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

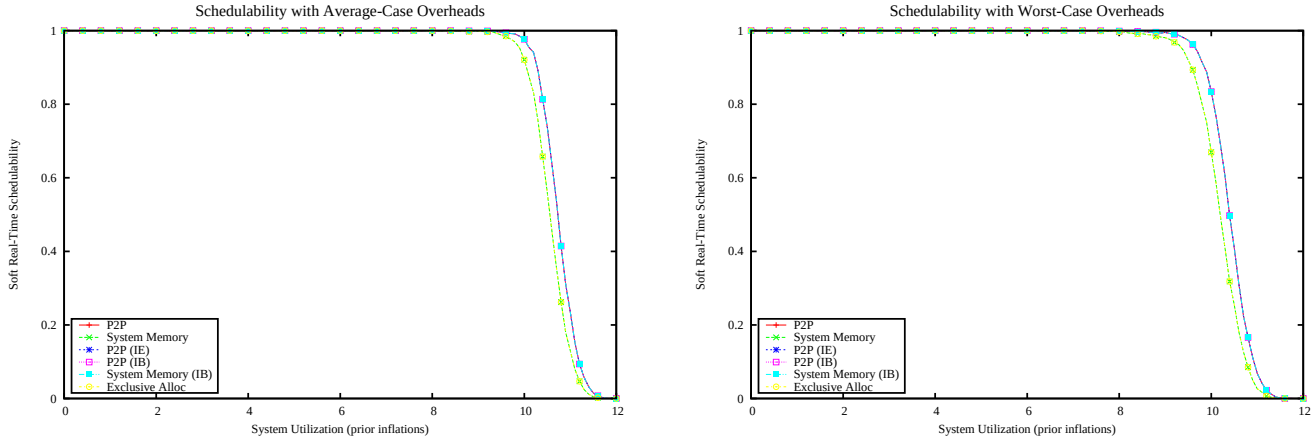

Figure 1369: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

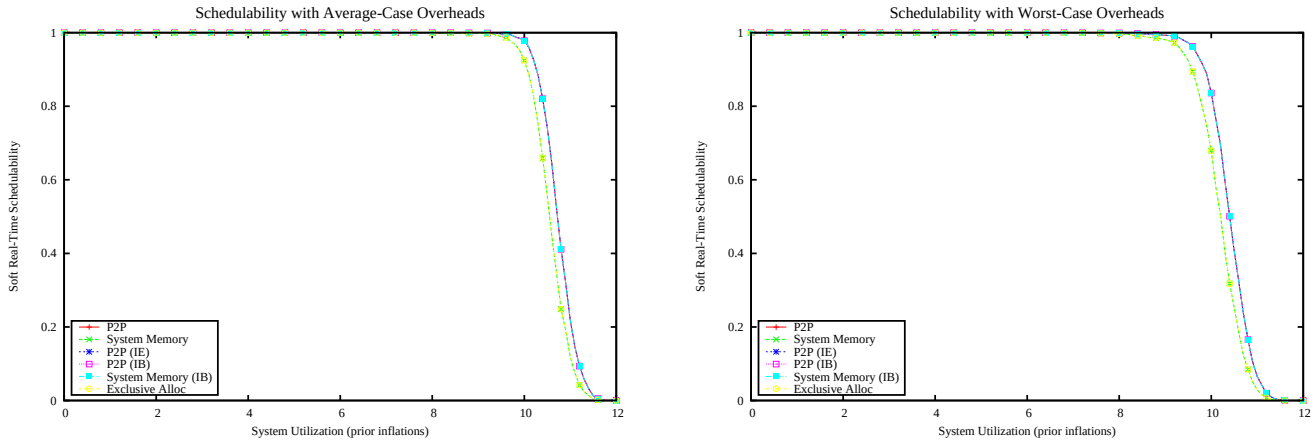

Figure 1370: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

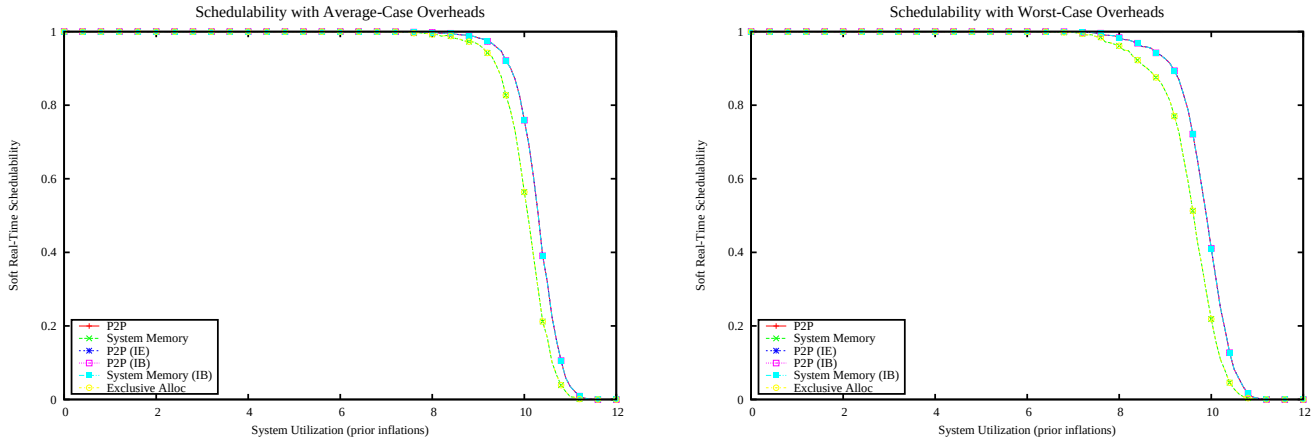

Figure 1371: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

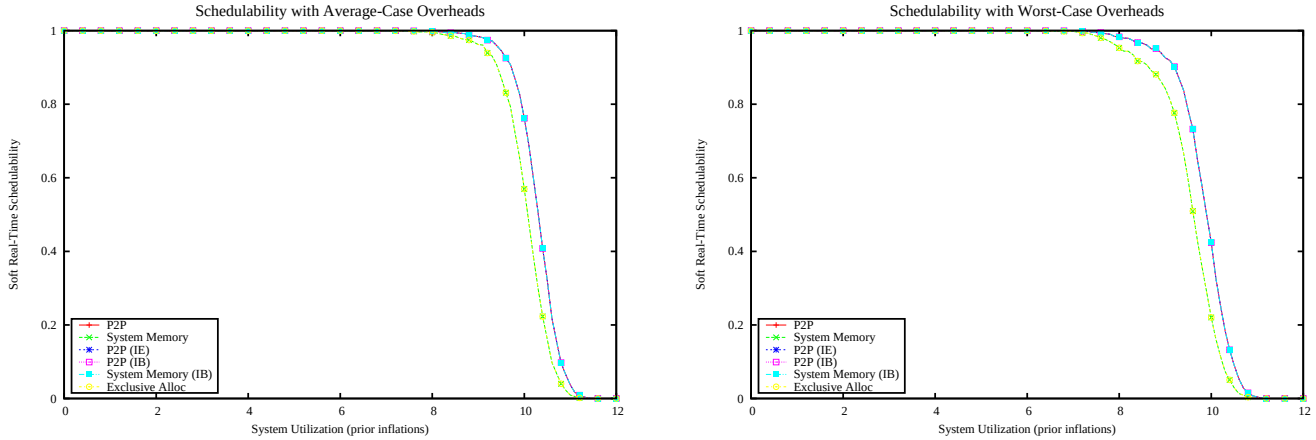

Figure 1372: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

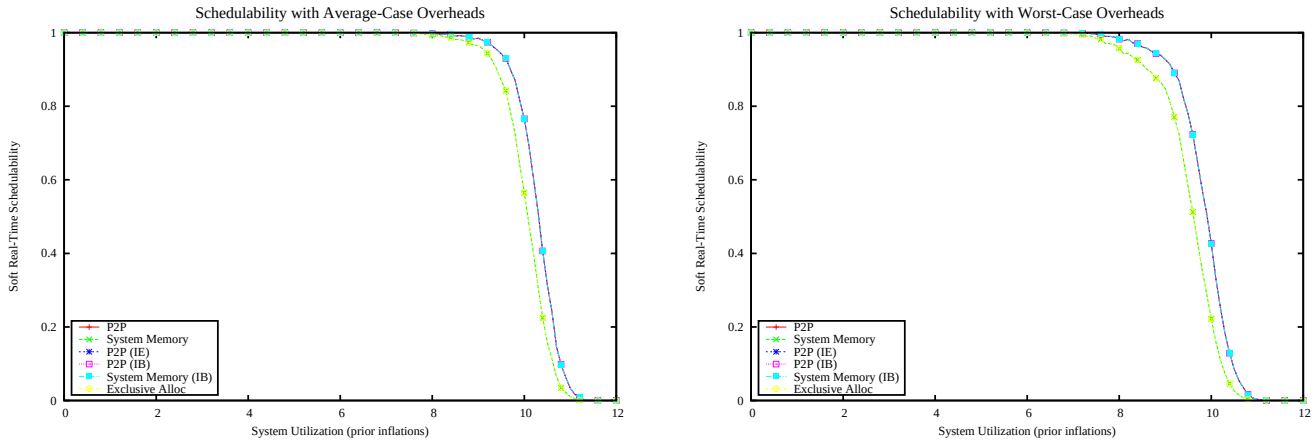

Figure 1373: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

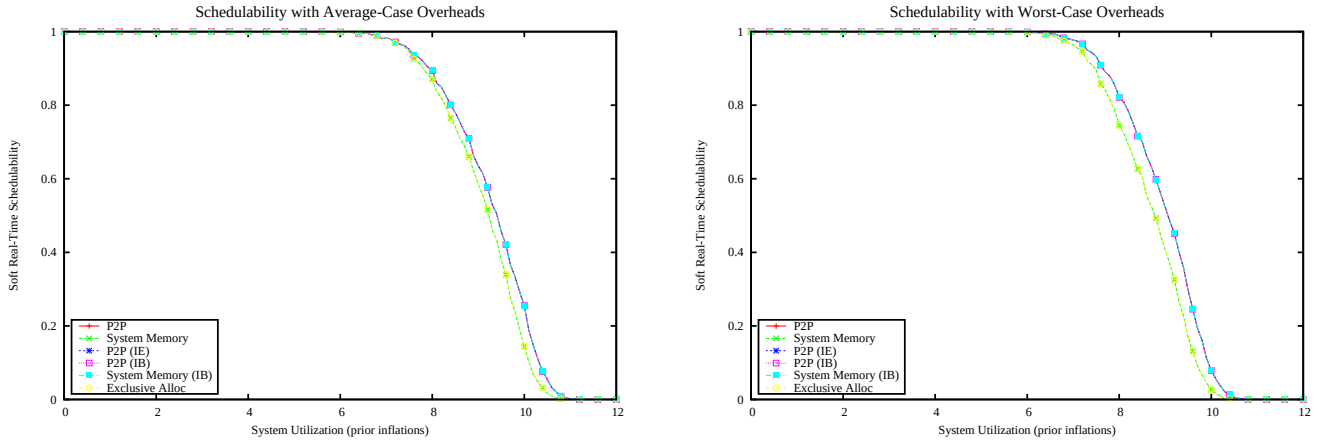

Figure 1374: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

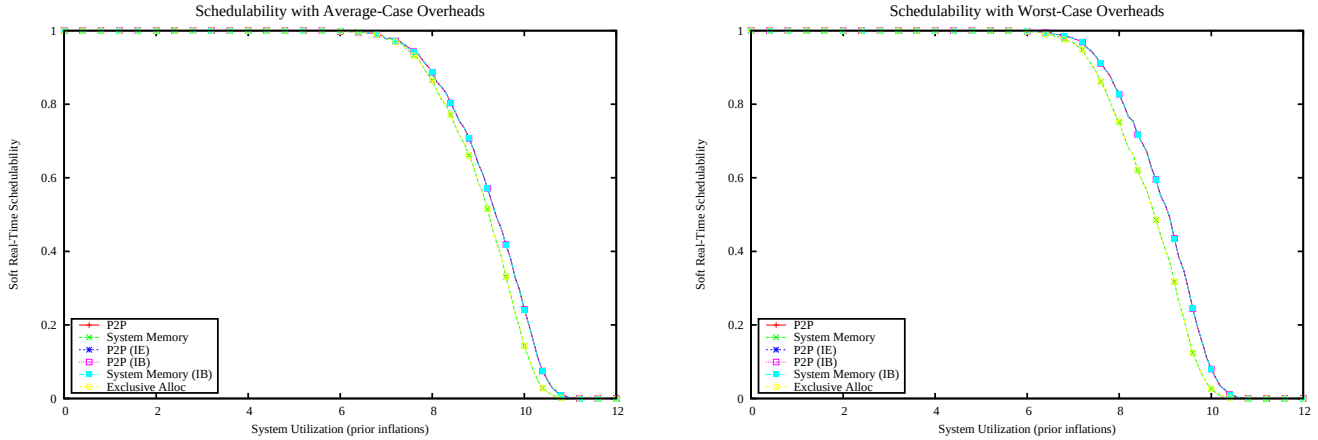

Figure 1375: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

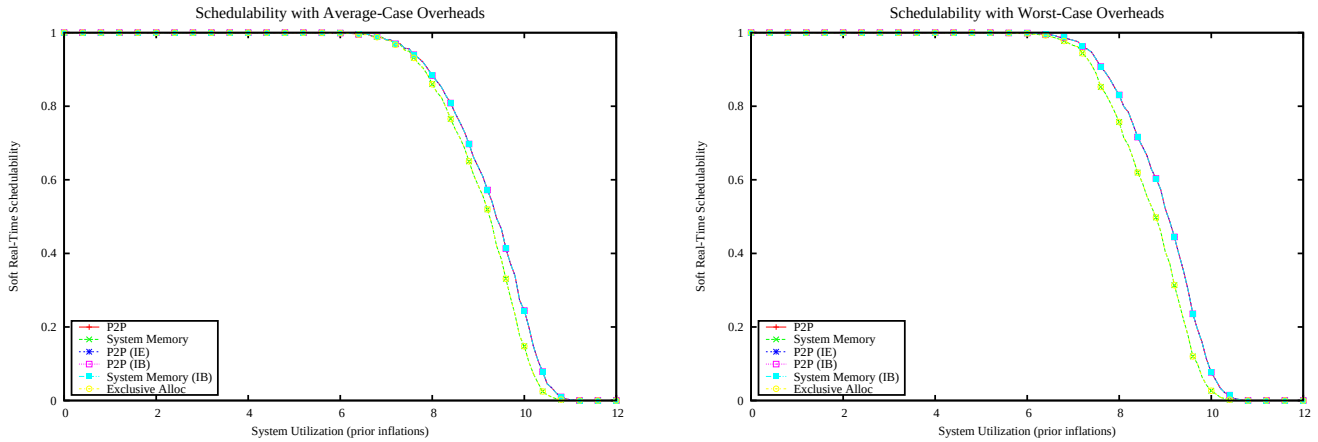

Figure 1376: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

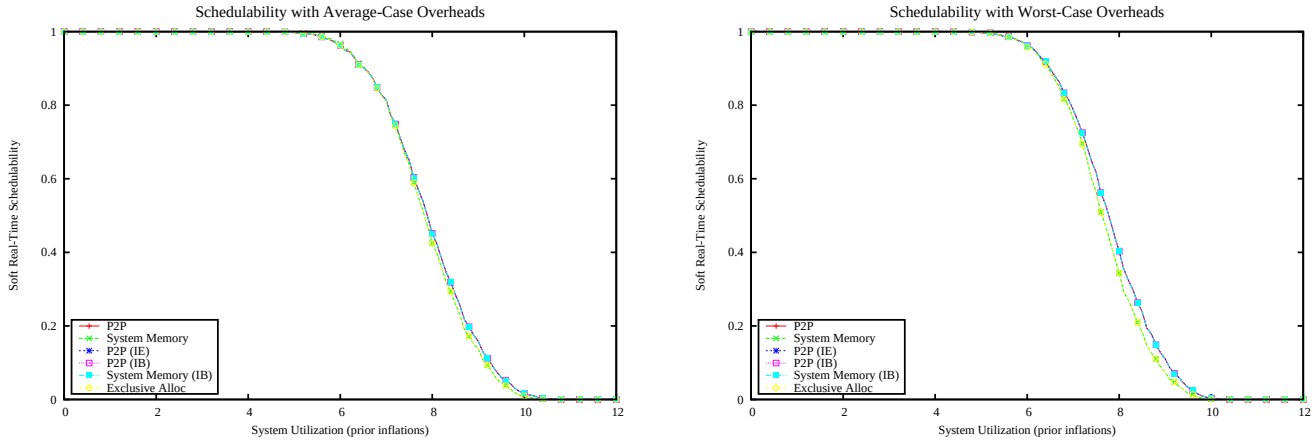

Figure 1377: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

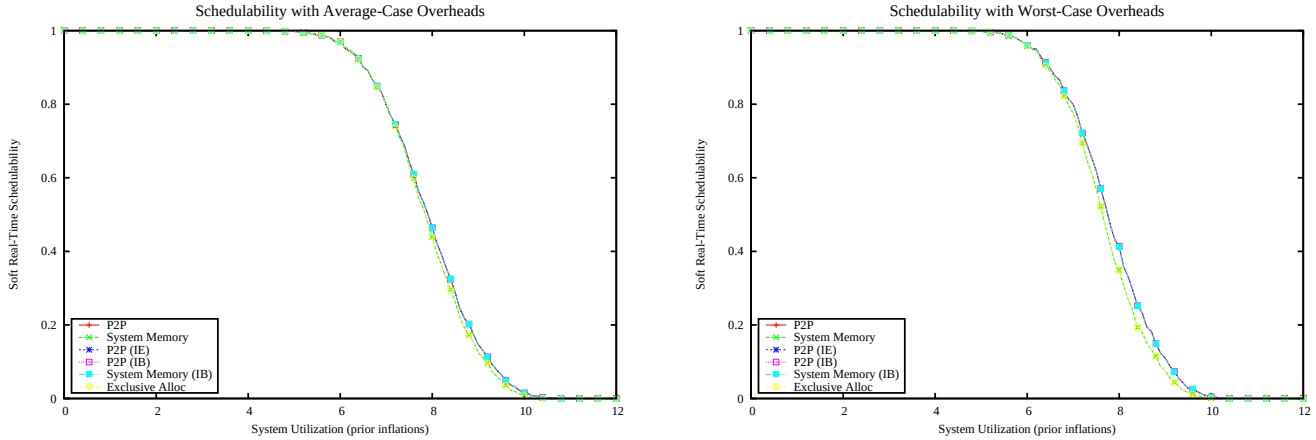

Figure 1378: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

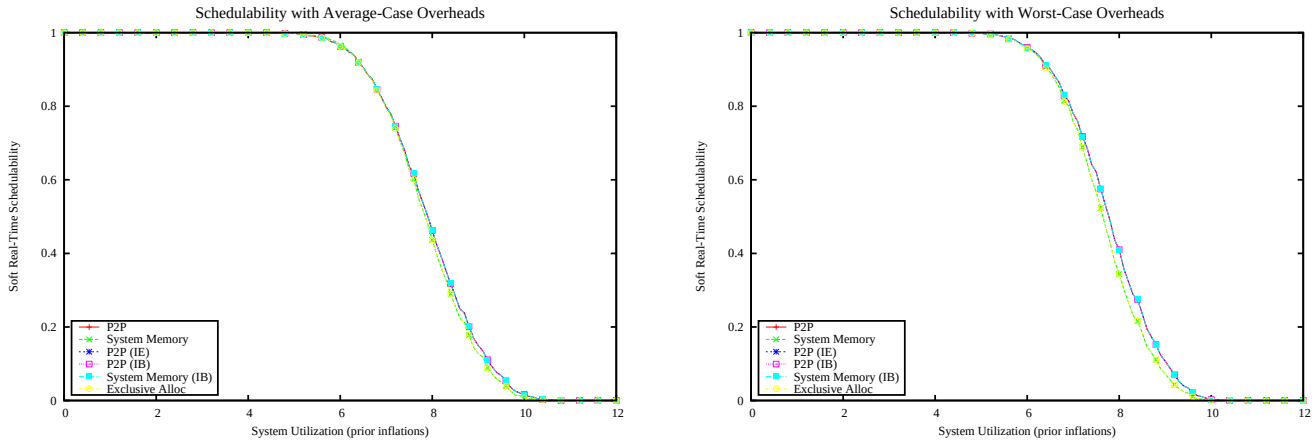

Figure 1379: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

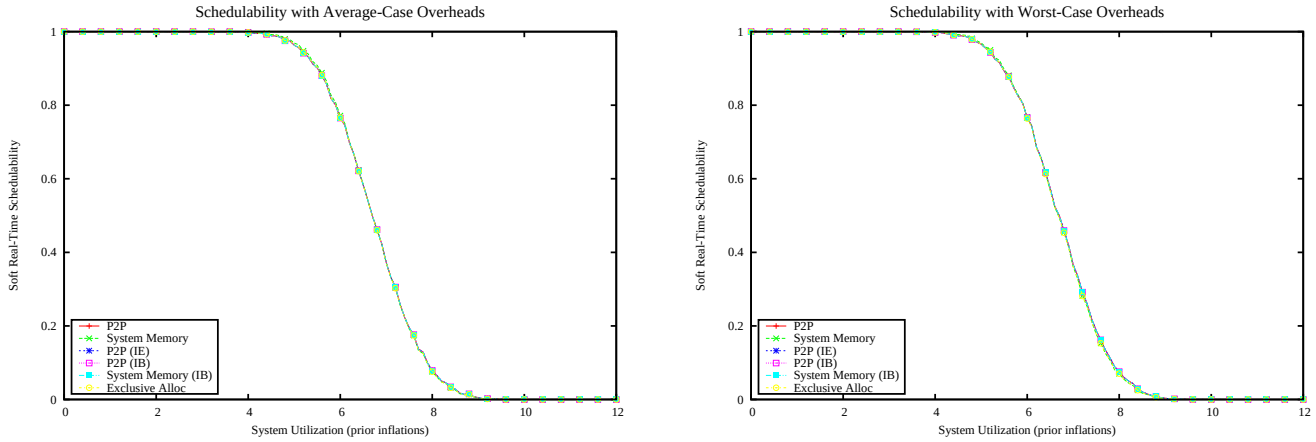

Figure 1380: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

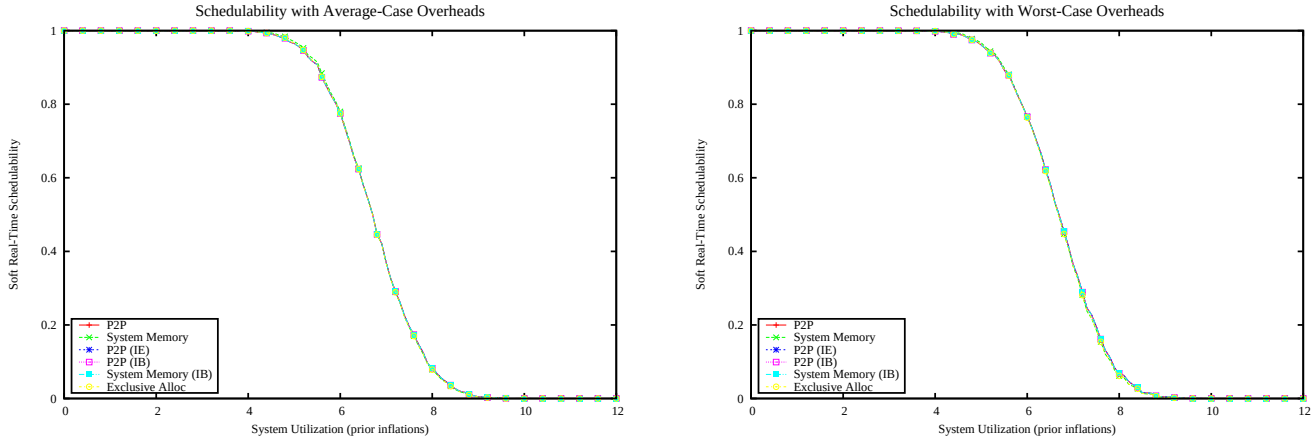

Figure 1381: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

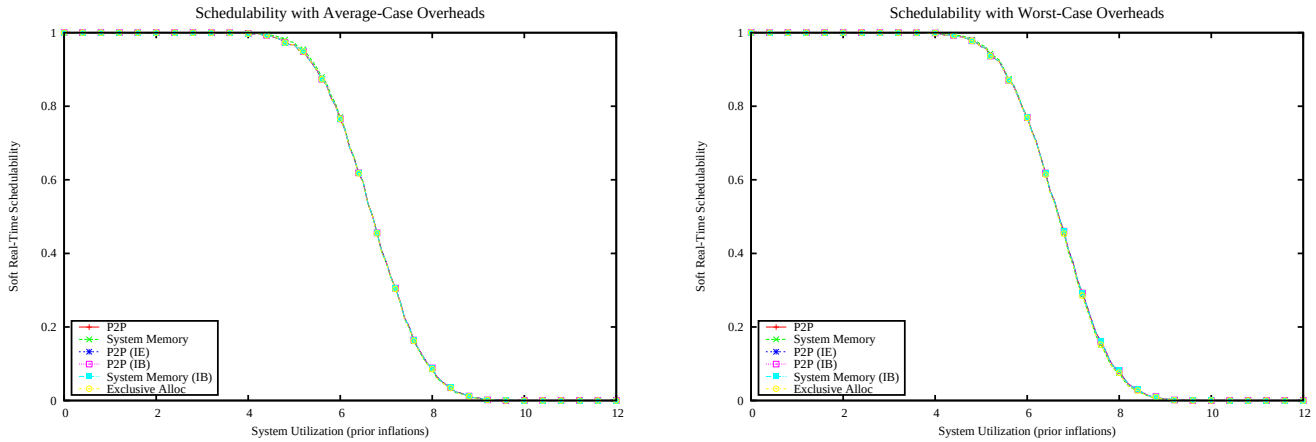

Figure 1382: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

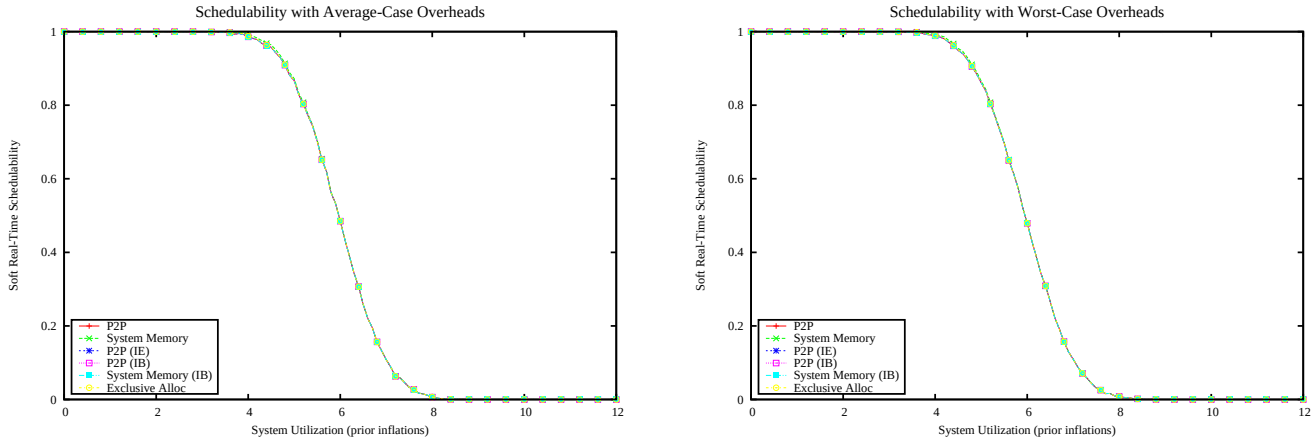

Figure 1383: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

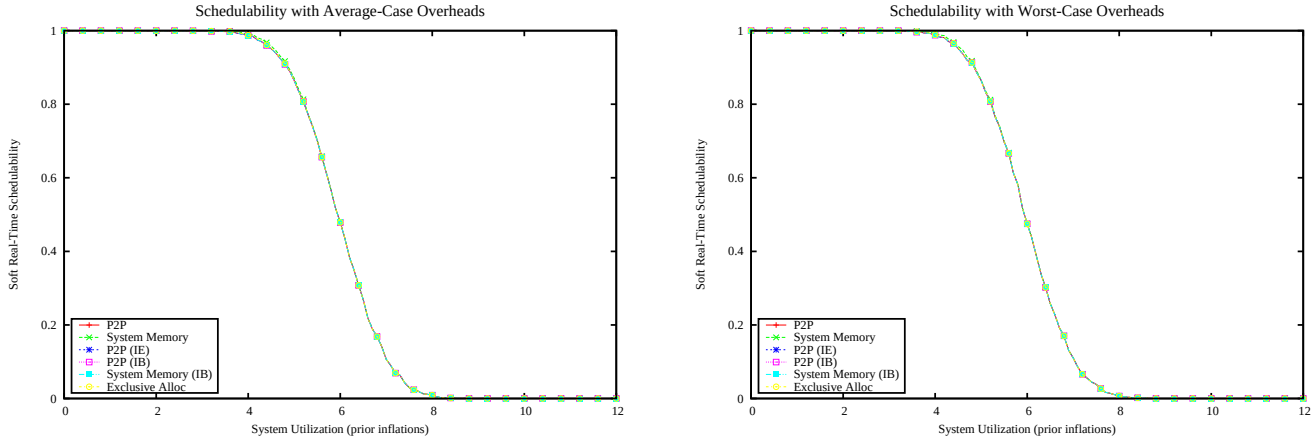

Figure 1384: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

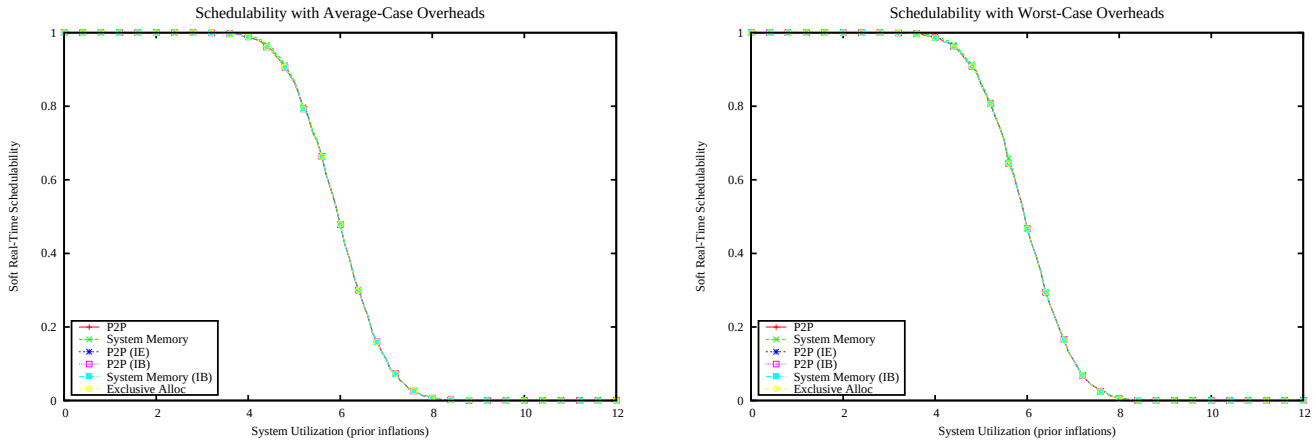

Figure 1385: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

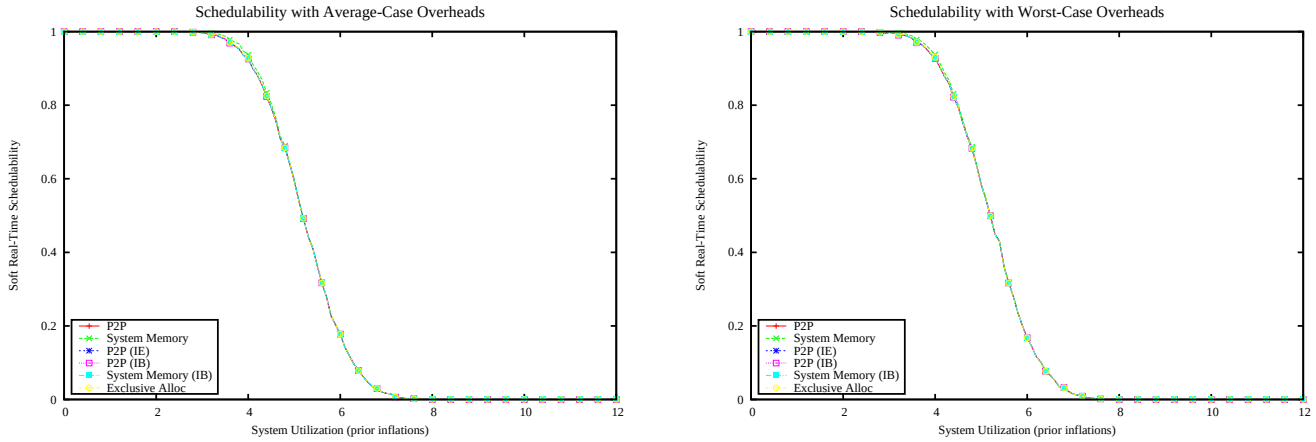

Figure 1386: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

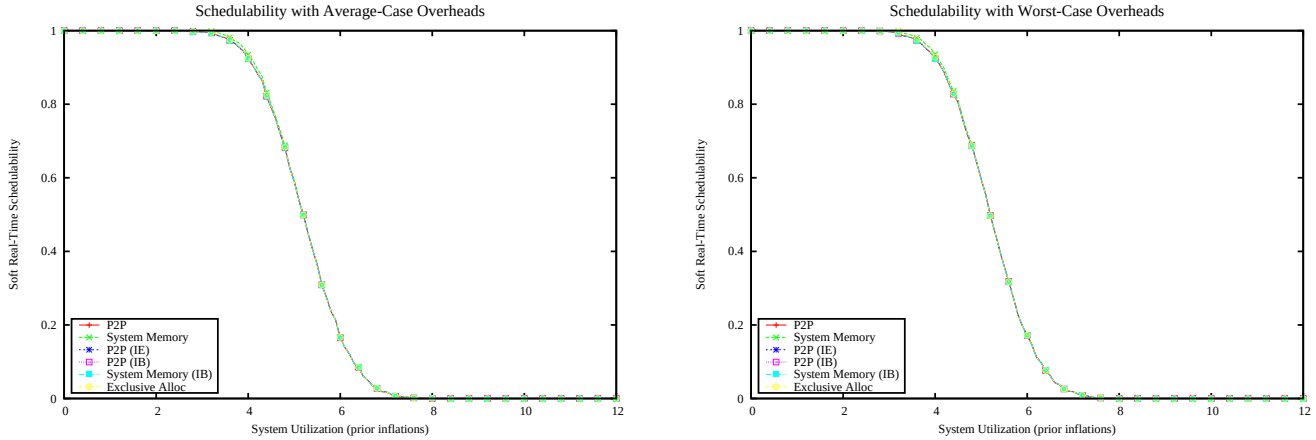

Figure 1387: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

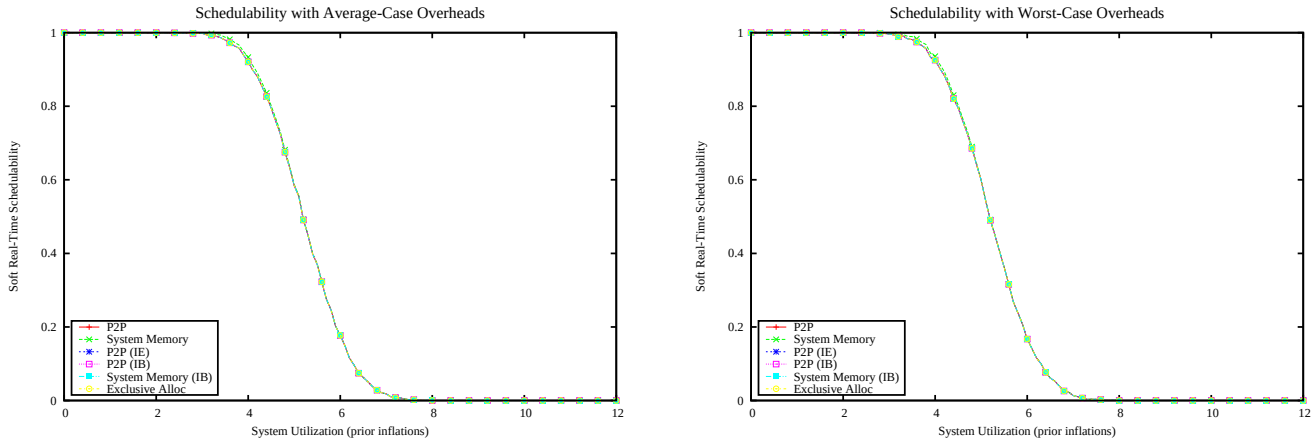

Figure 1388: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

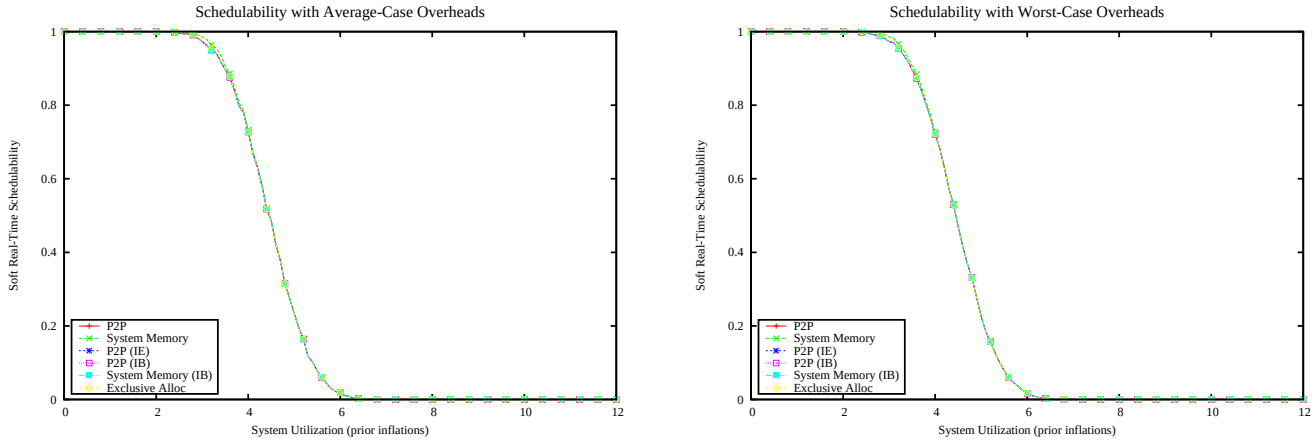

Figure 1389: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

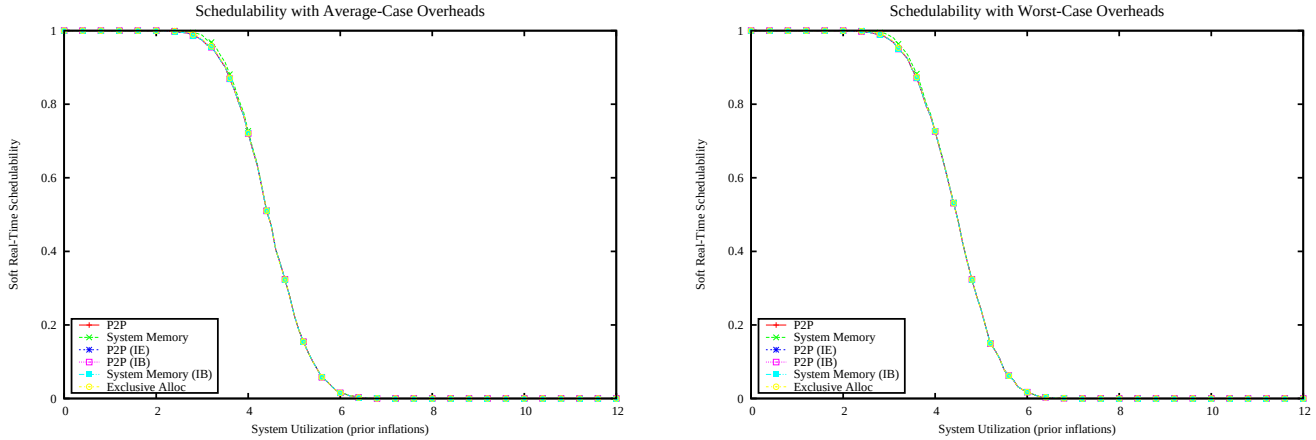

Figure 1390: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

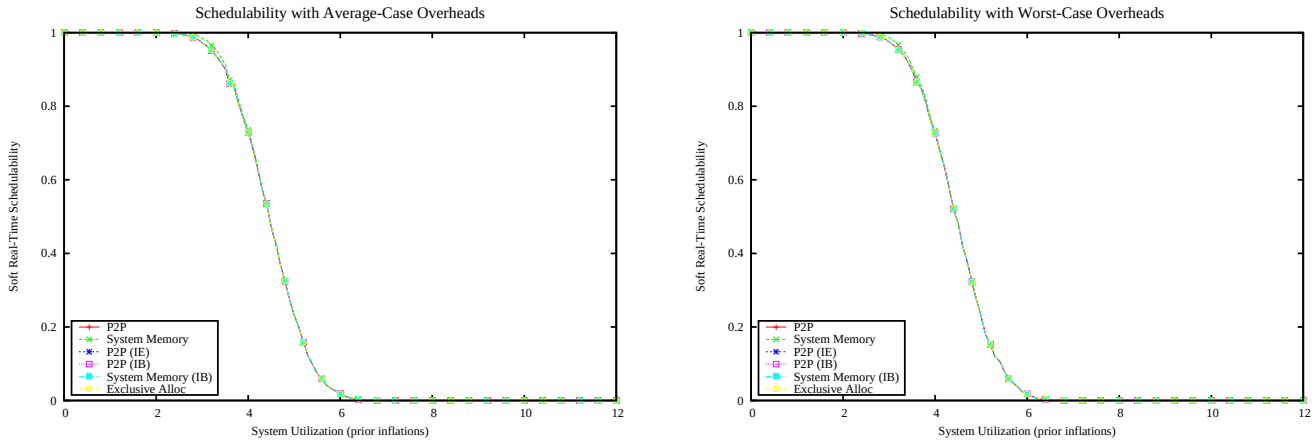

Figure 1391: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

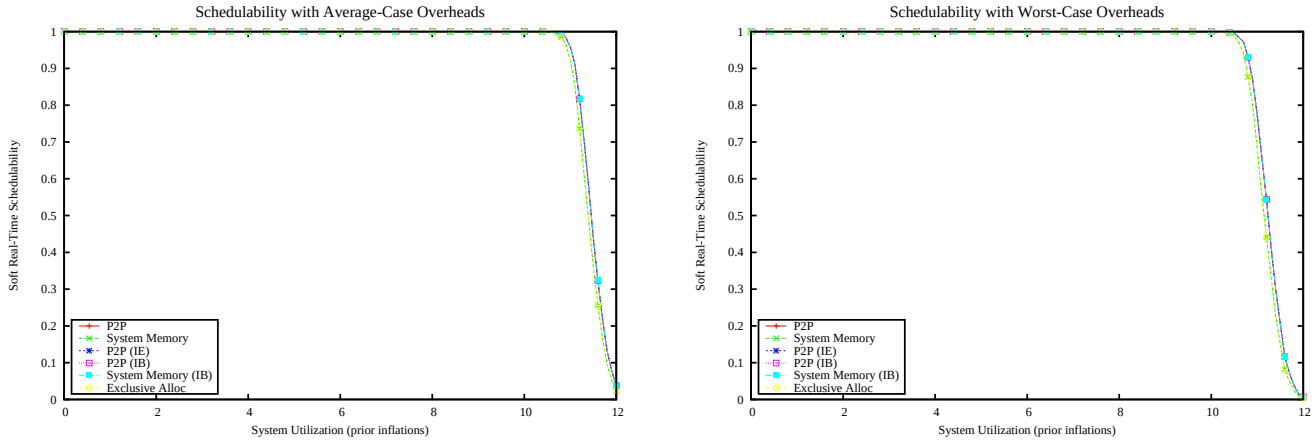

Figure 1392: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

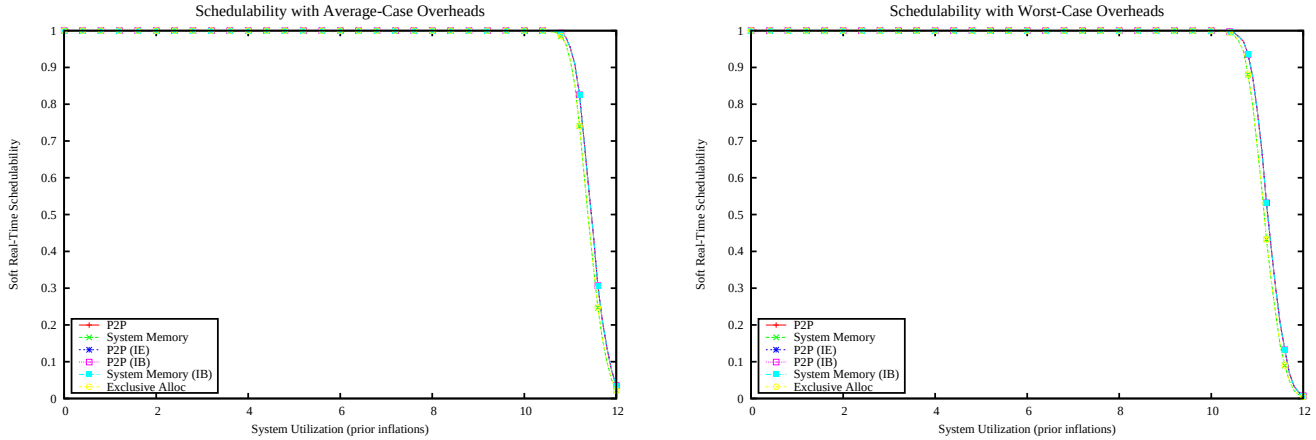

Figure 1393: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

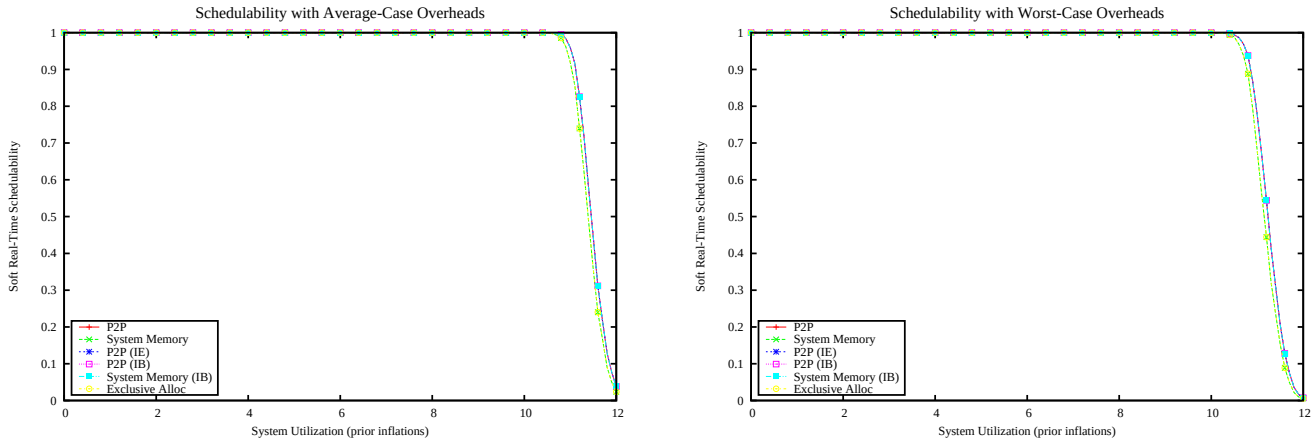

Figure 1394: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

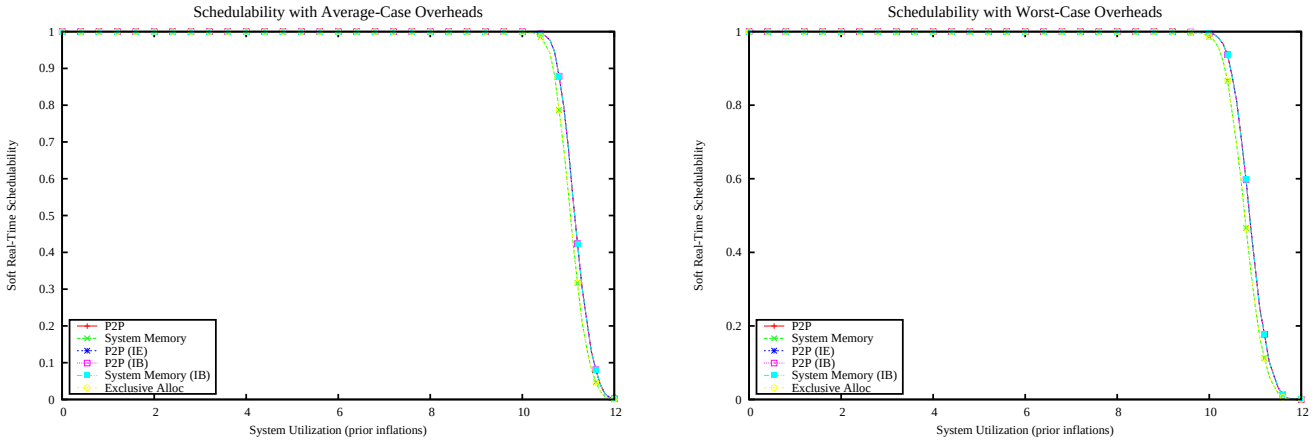

Figure 1395: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

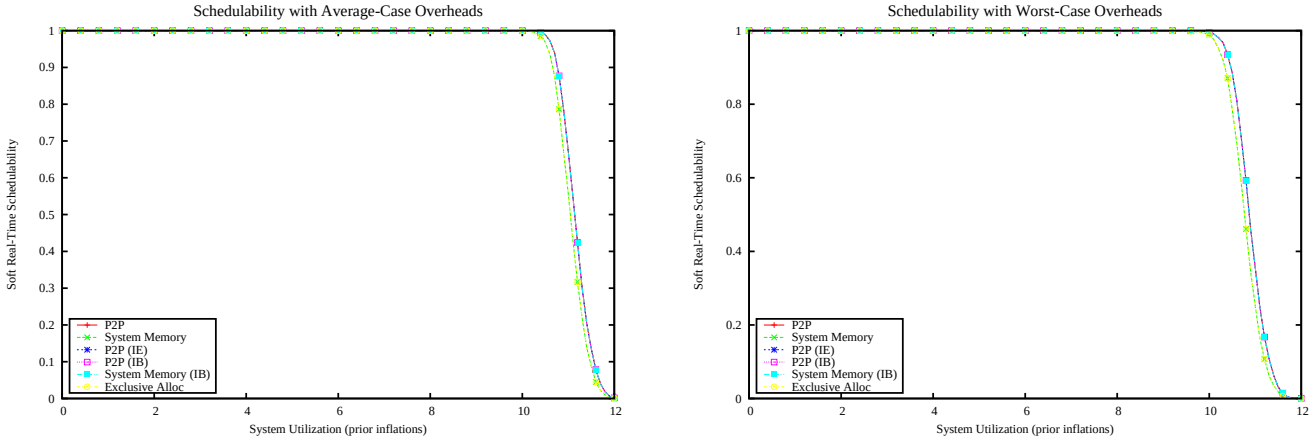

Figure 1396: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

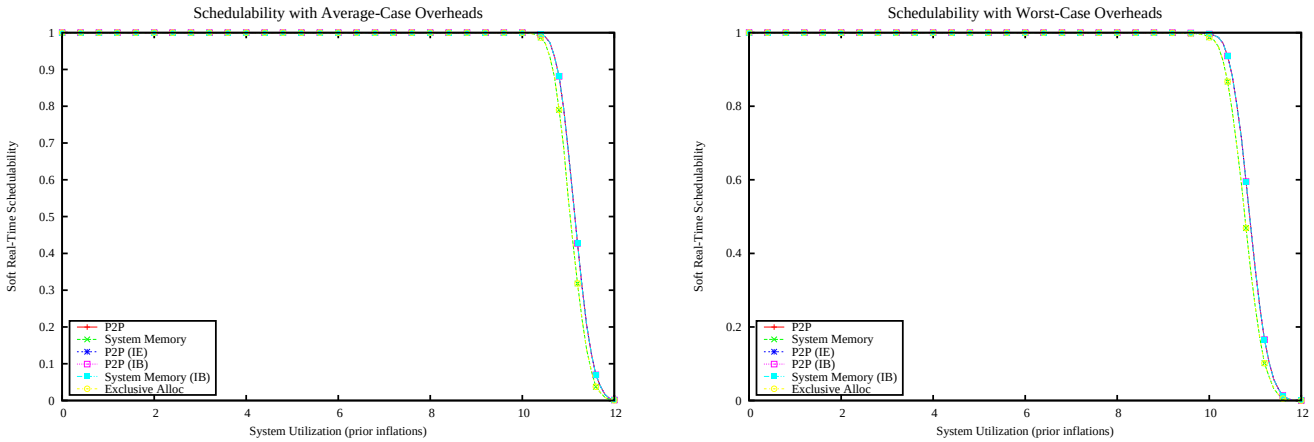

Figure 1397: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

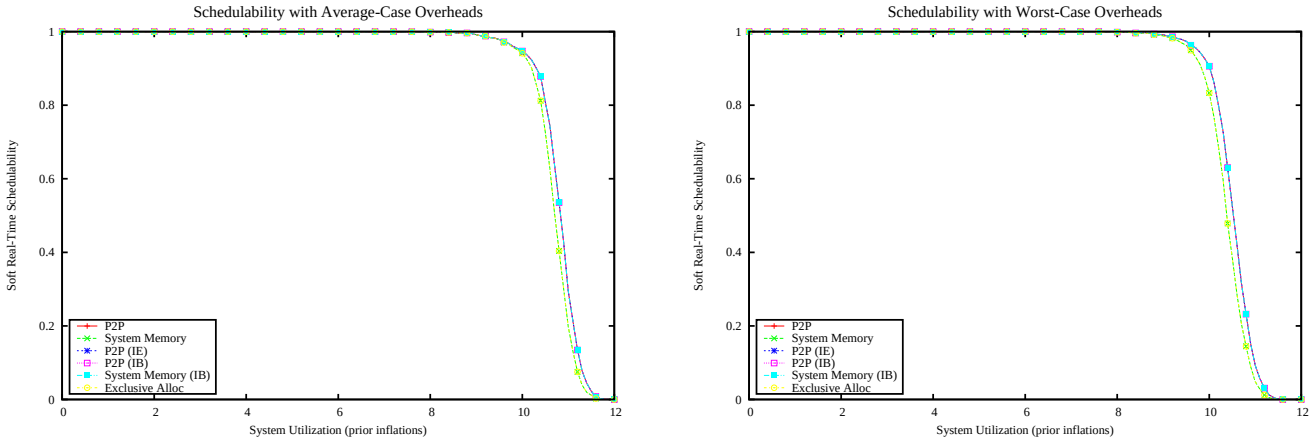

Figure 1398: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

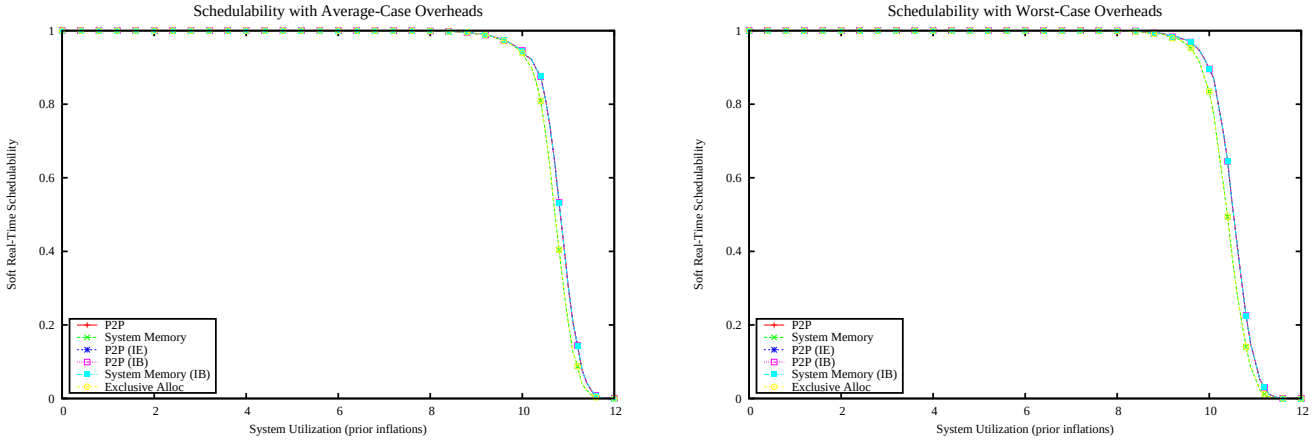

Figure 1399: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

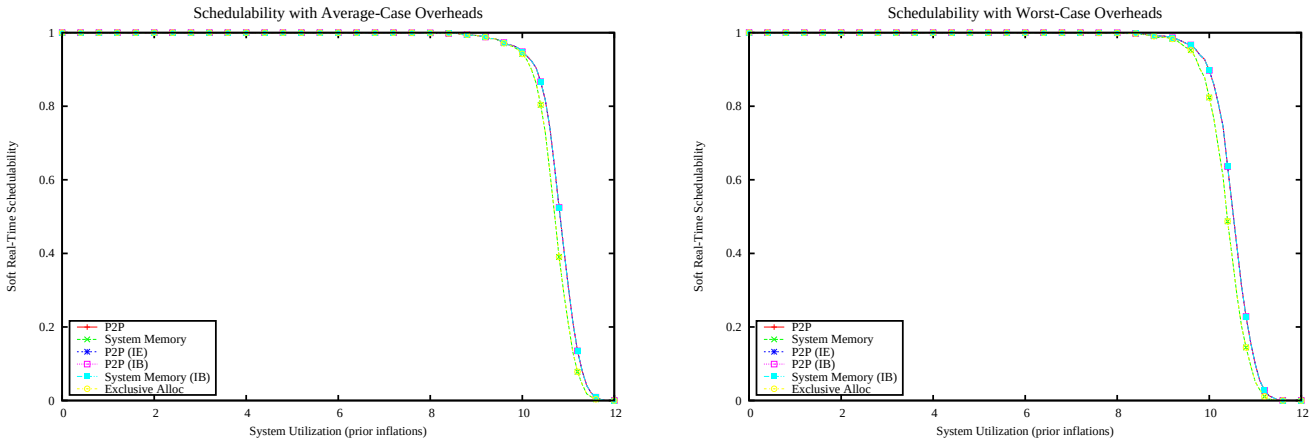

Figure 1400: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

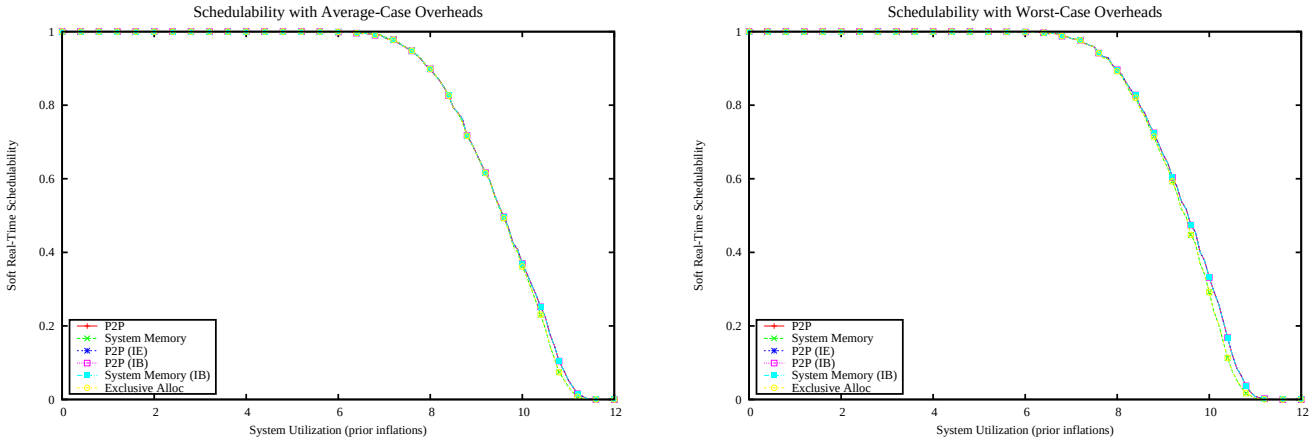

Figure 1401: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

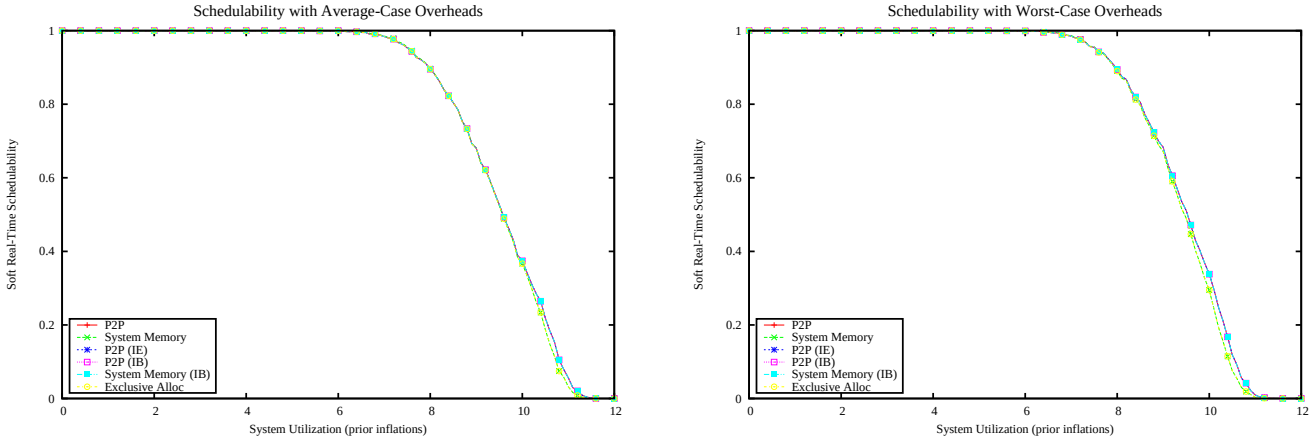

Figure 1402: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

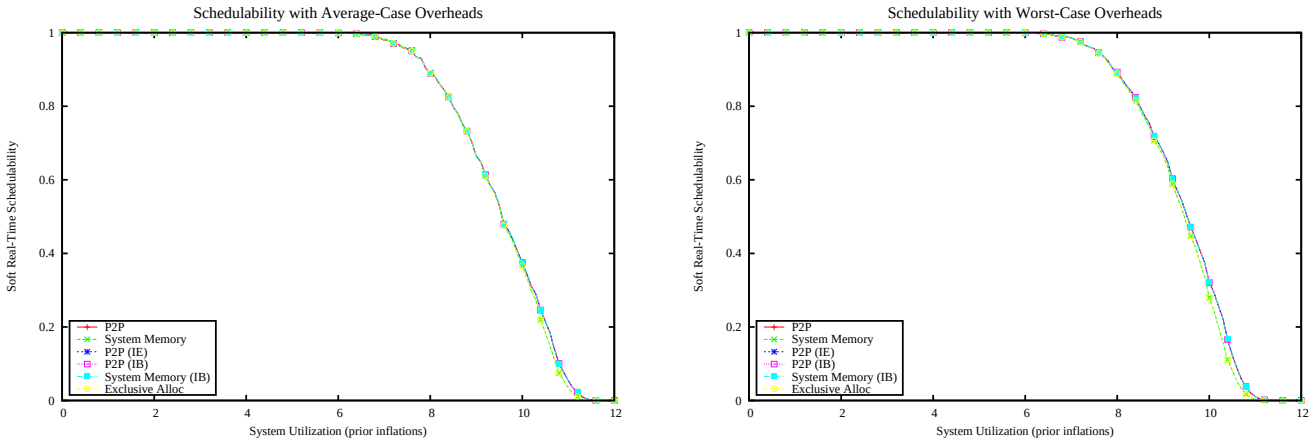

Figure 1403: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

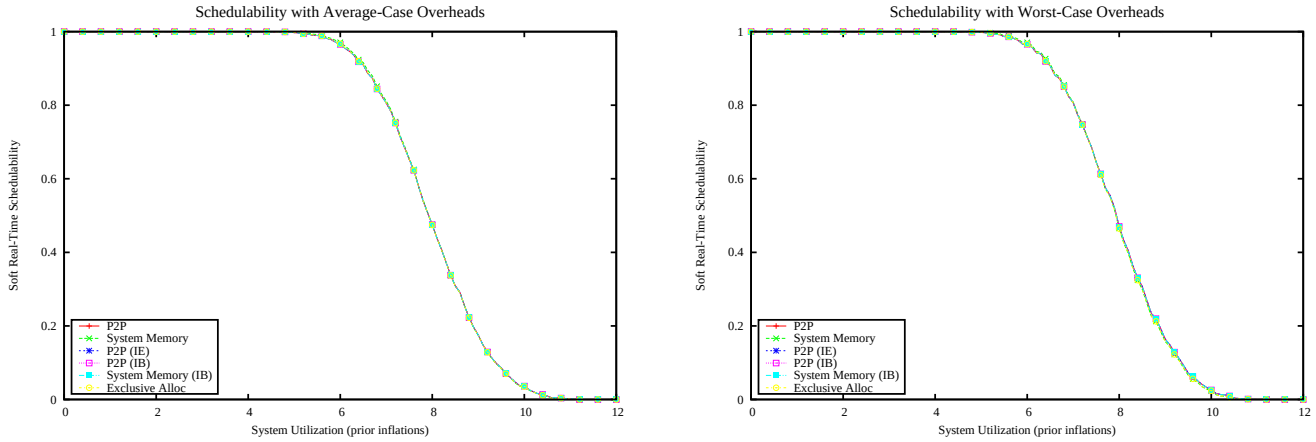

Figure 1404: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

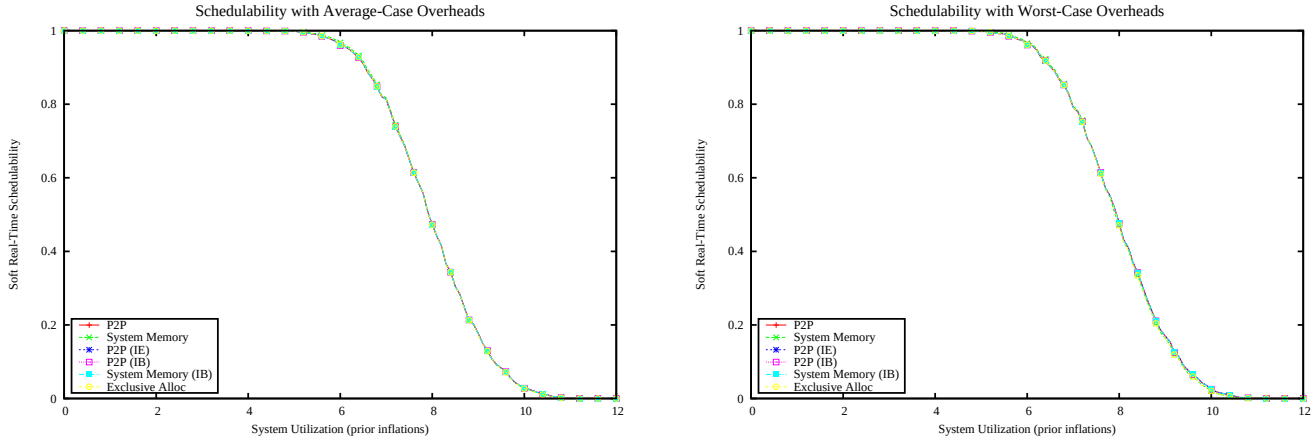

Figure 1405: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

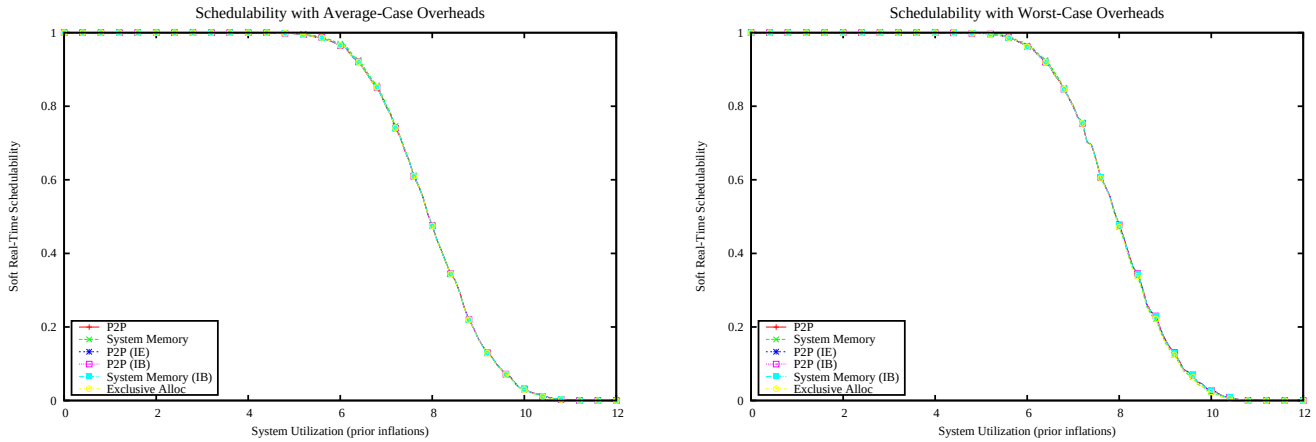

Figure 1406: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

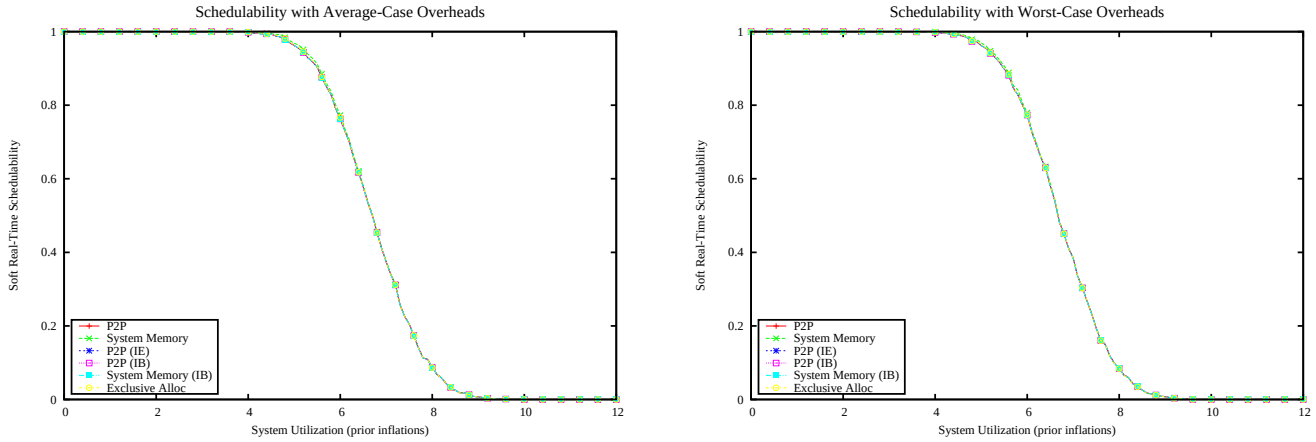

Figure 1407: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

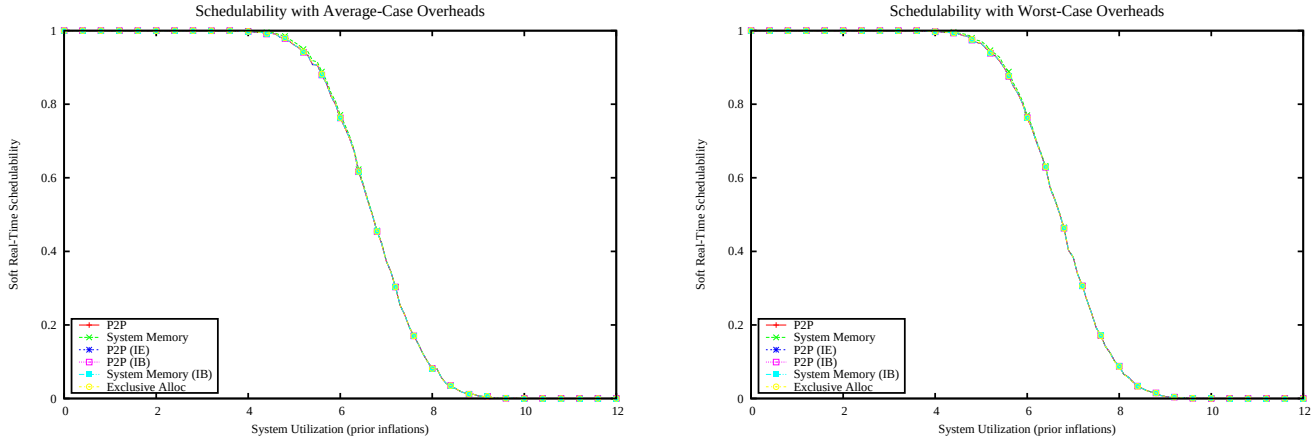

Figure 1408: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

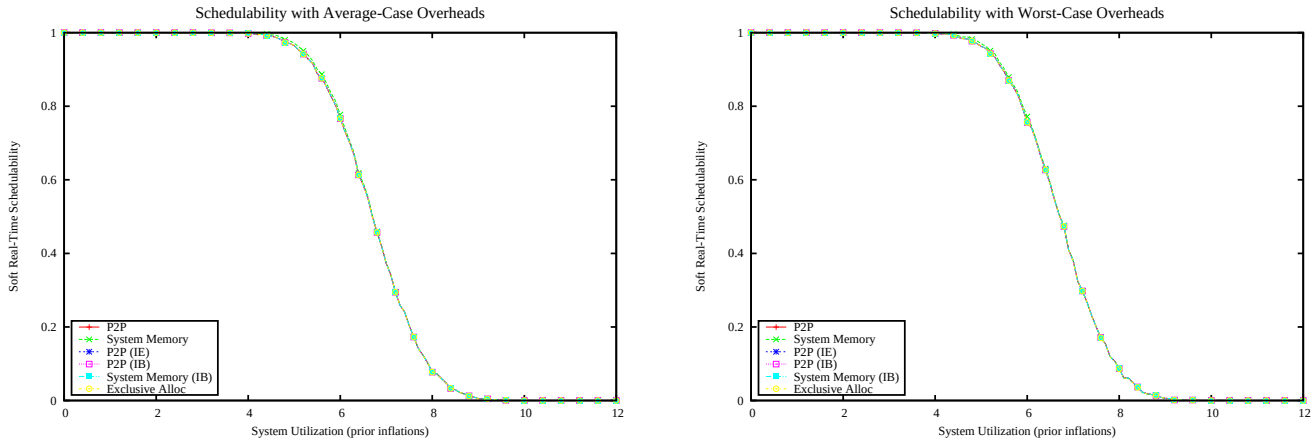

Figure 1409: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

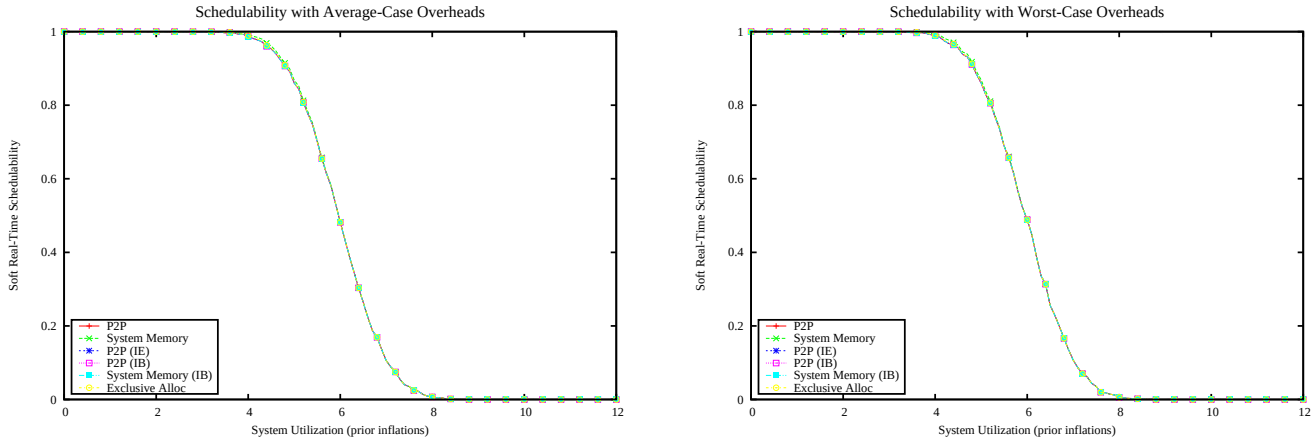

Figure 1410: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

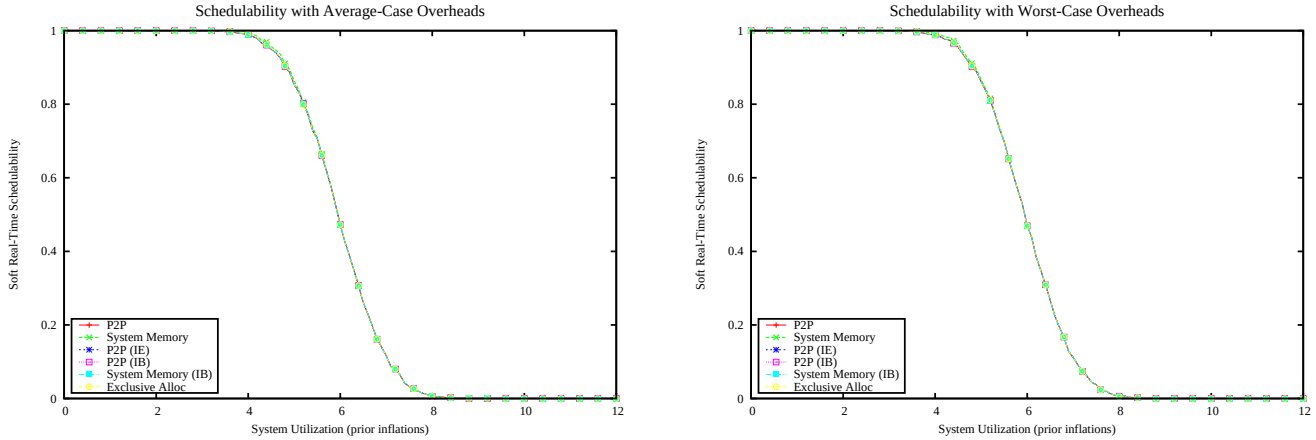

Figure 1411: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

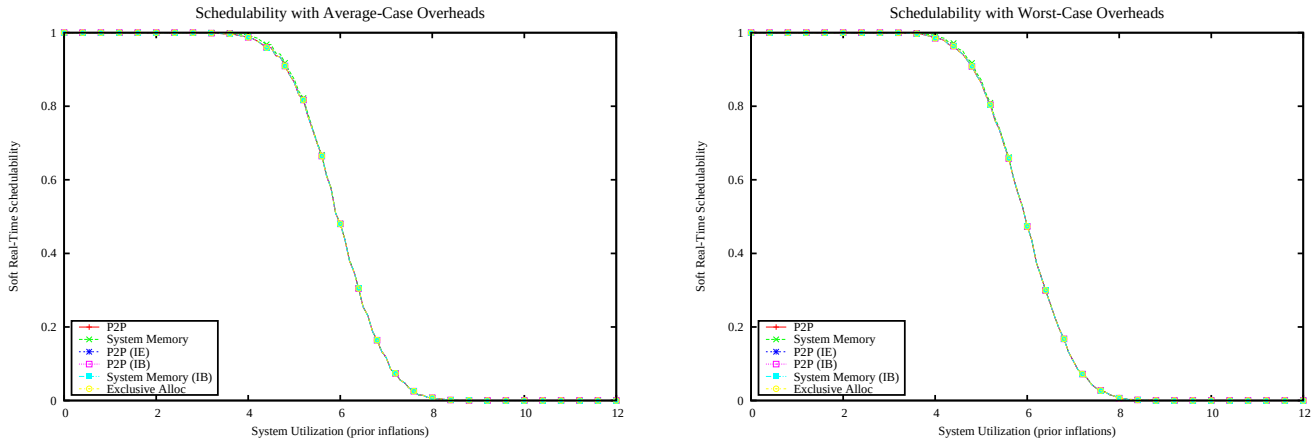

Figure 1412: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

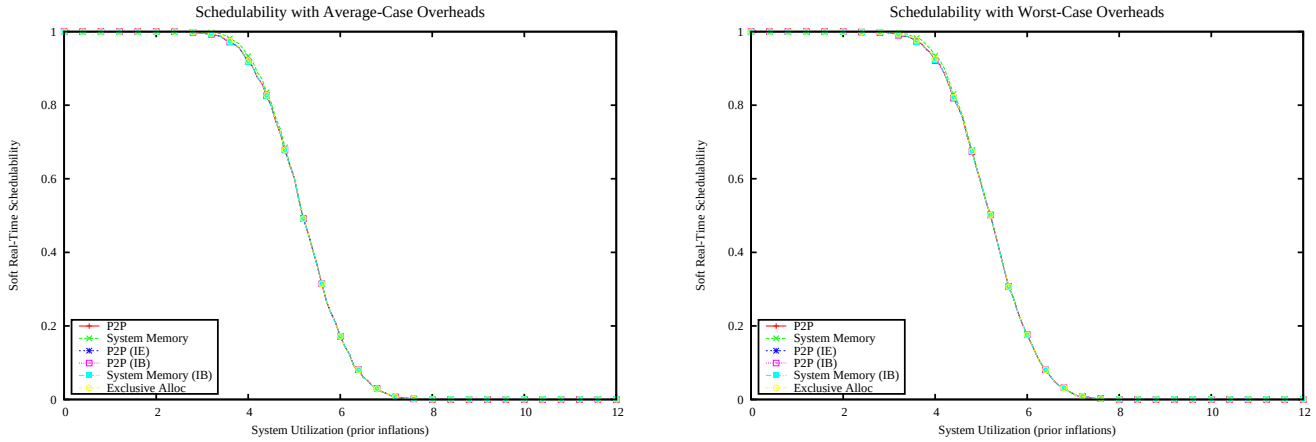

Figure 1413: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

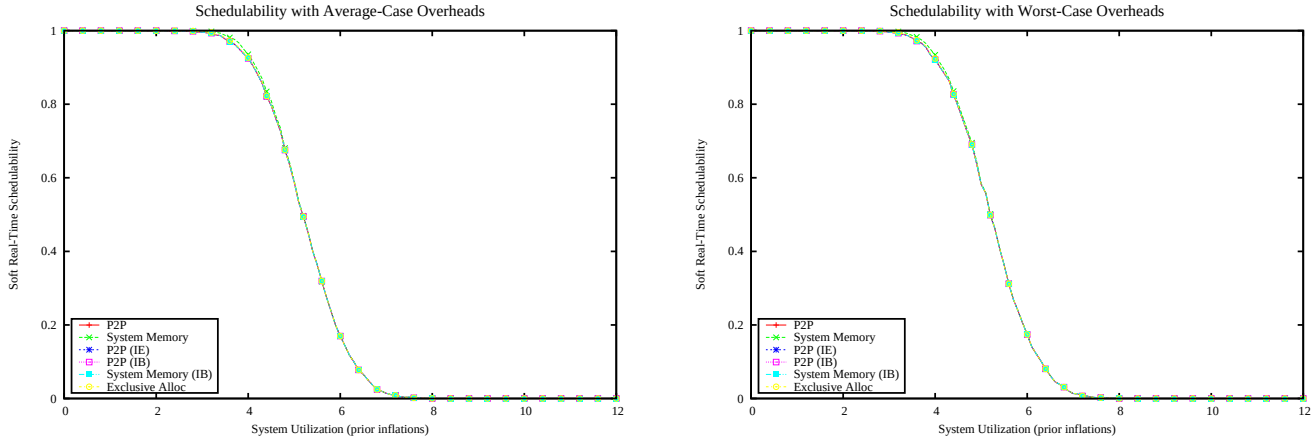

Figure 1414: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

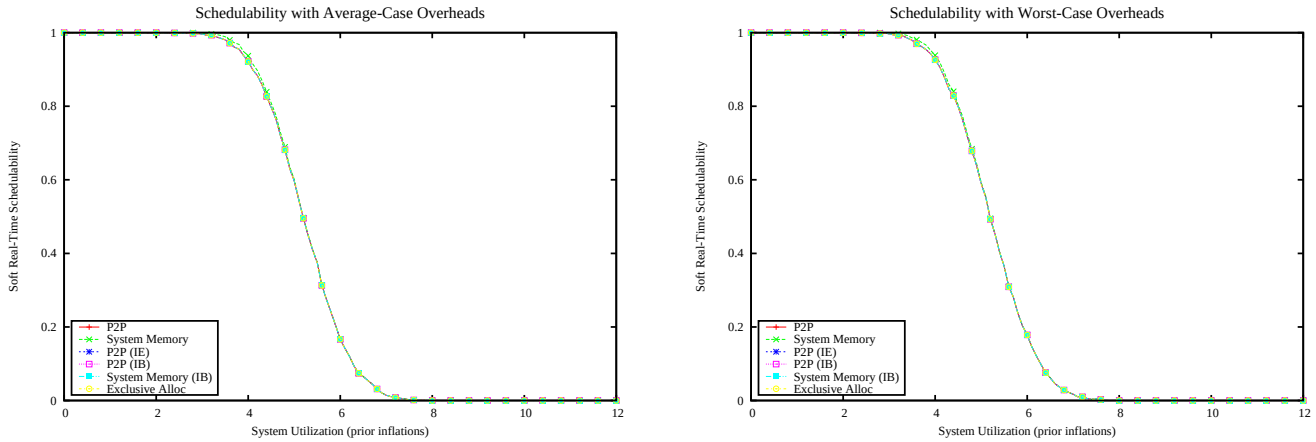

Figure 1415: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

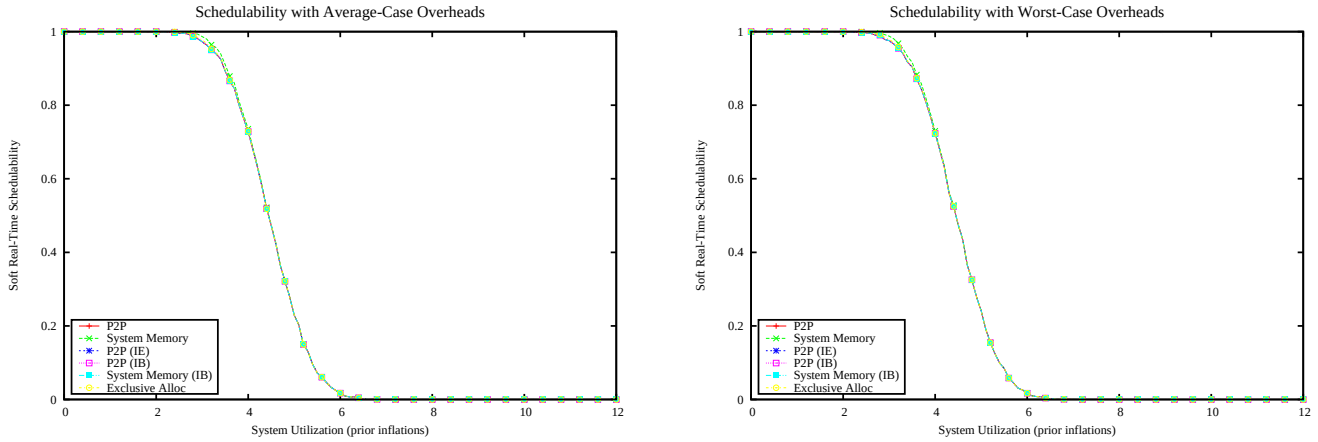

Figure 1416: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

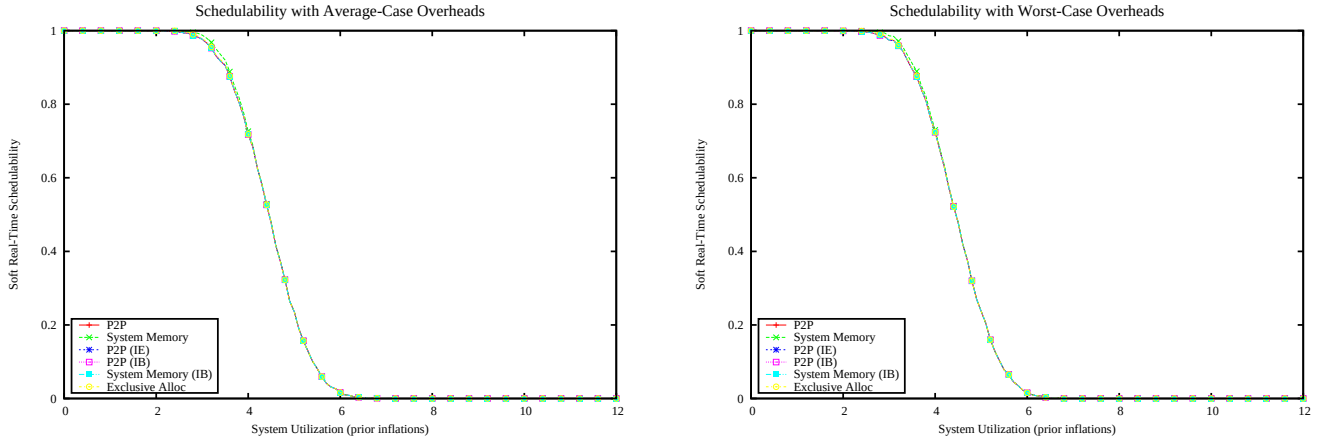

Figure 1417: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

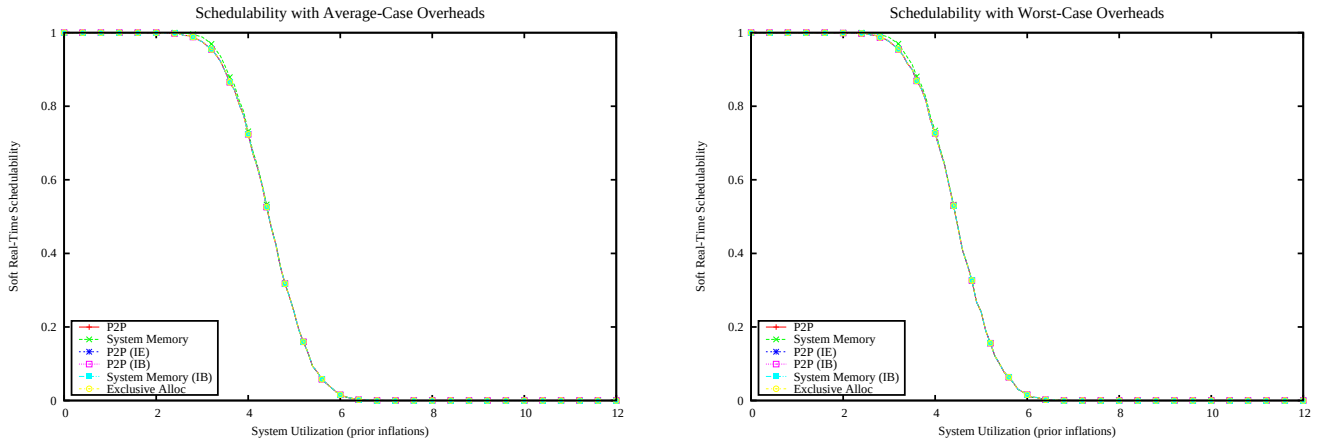

Figure 1418: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

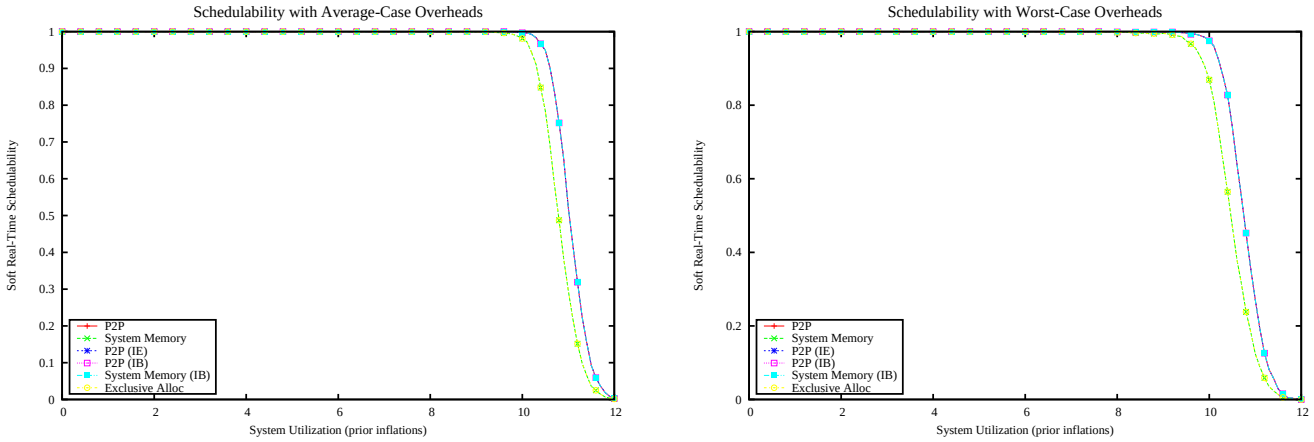

Figure 1419: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

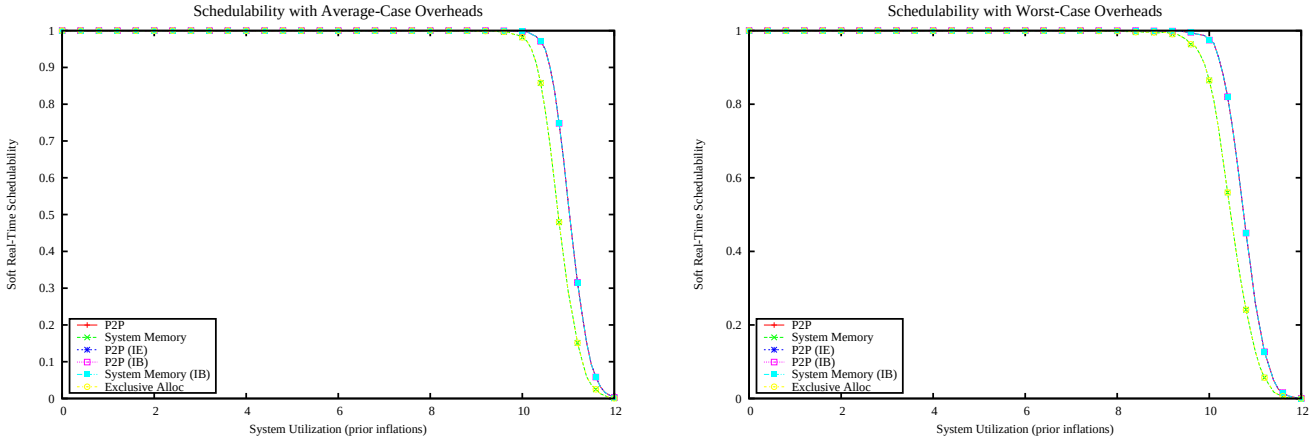

Figure 1420: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

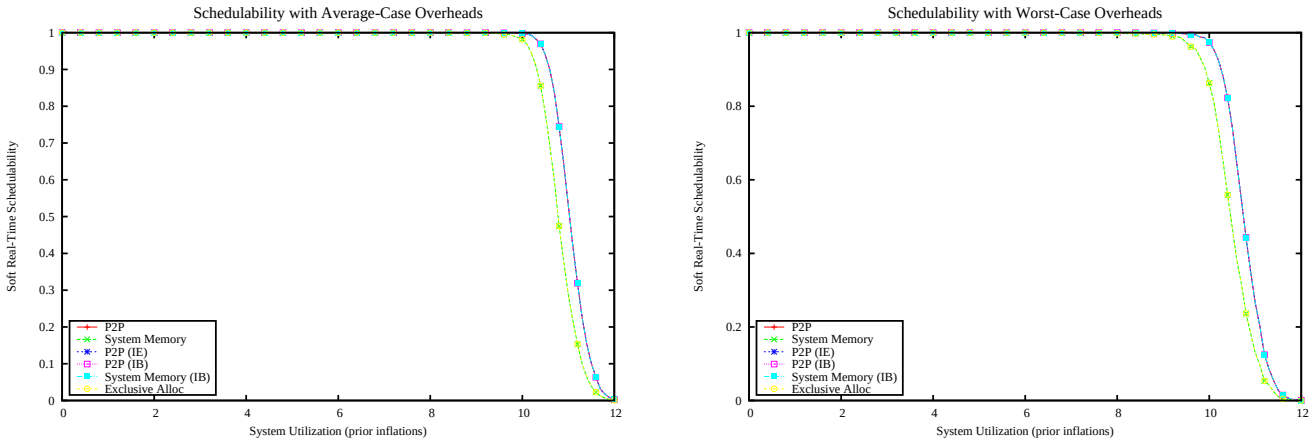

Figure 1421: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

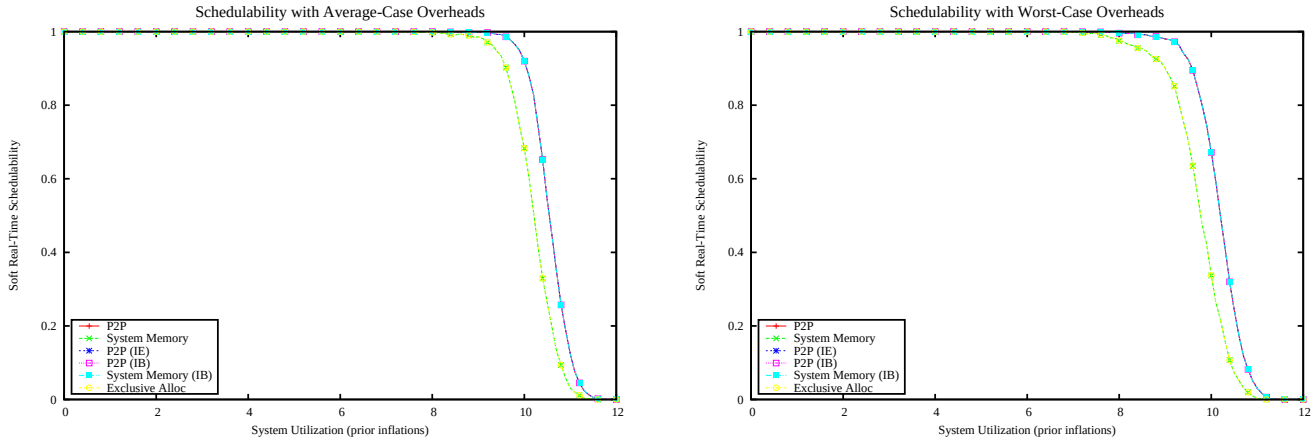

Figure 1422: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

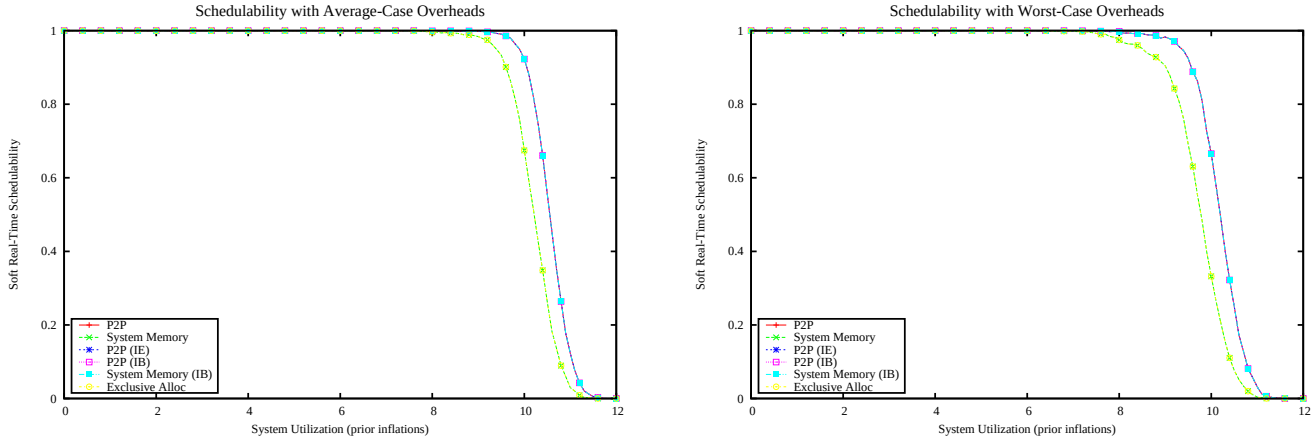

Figure 1423: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

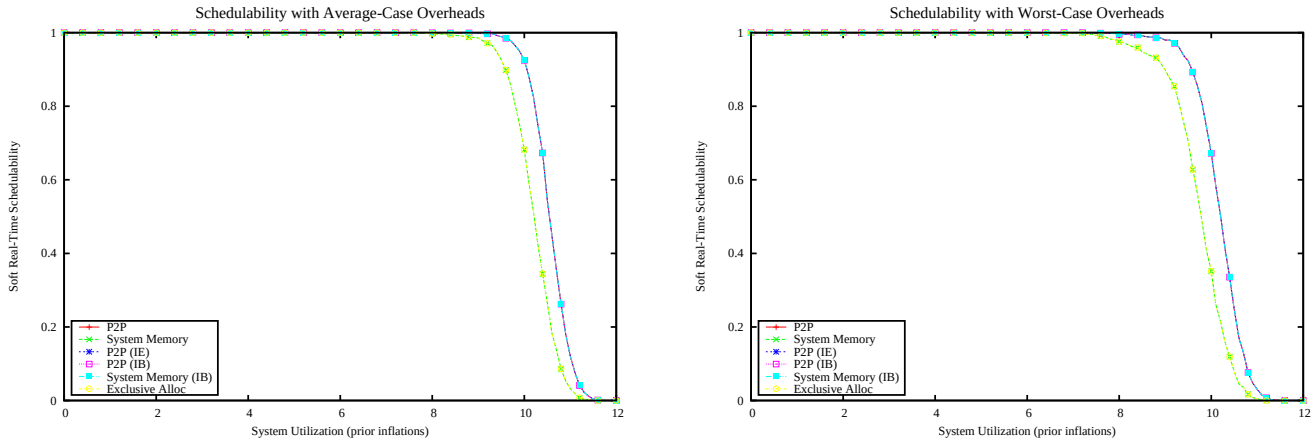

Figure 1424: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

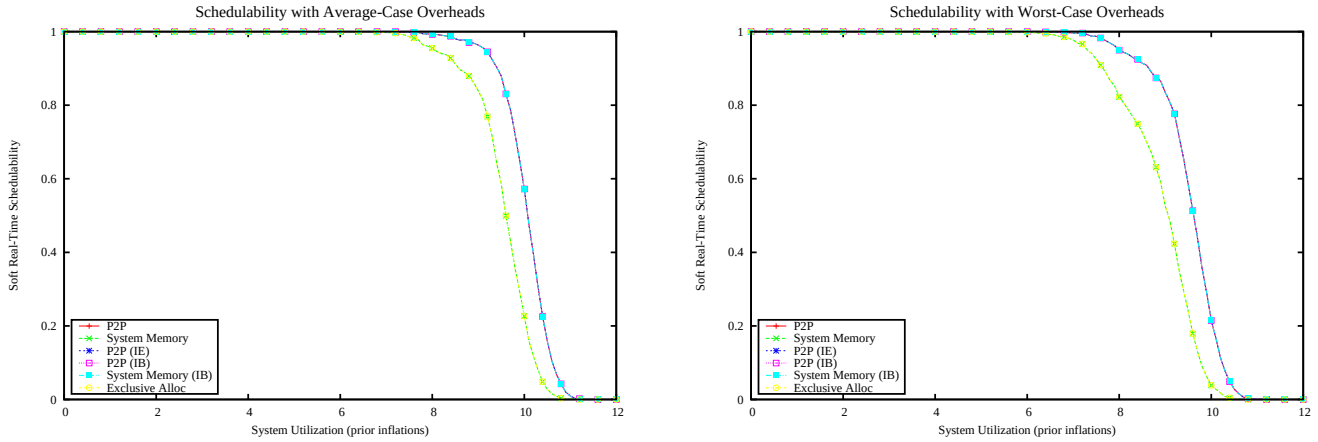

Figure 1425: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

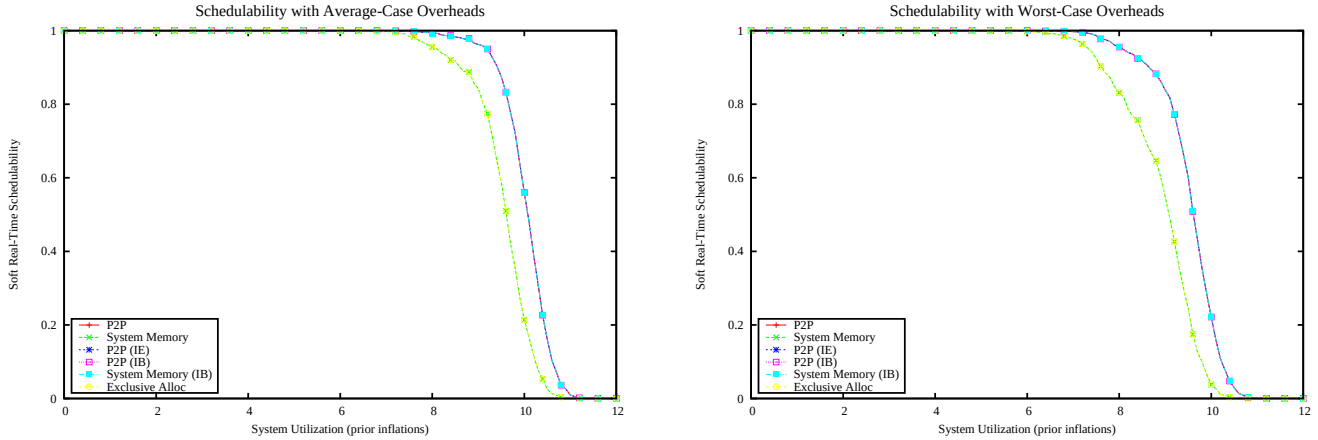

Figure 1426: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

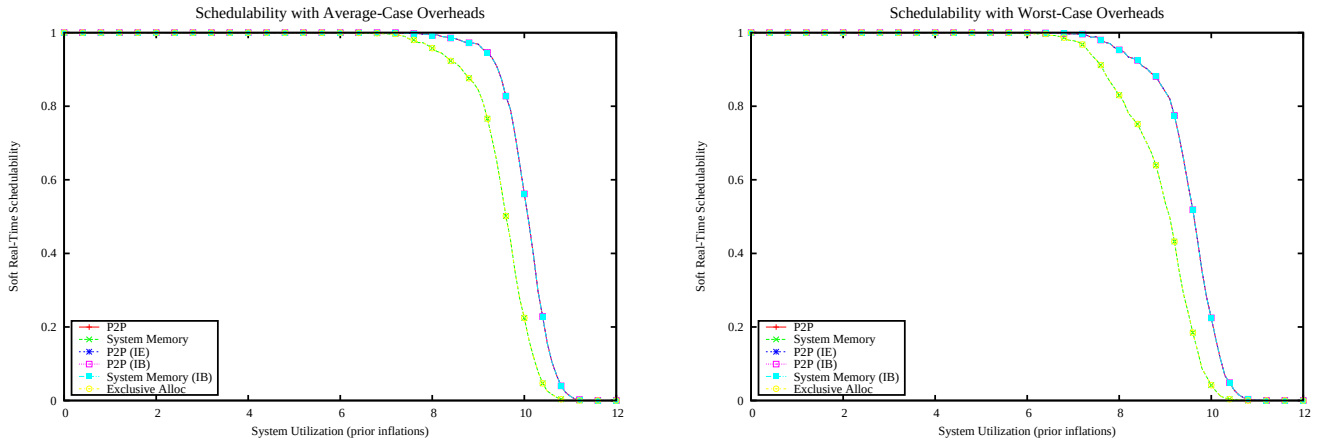

Figure 1427: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

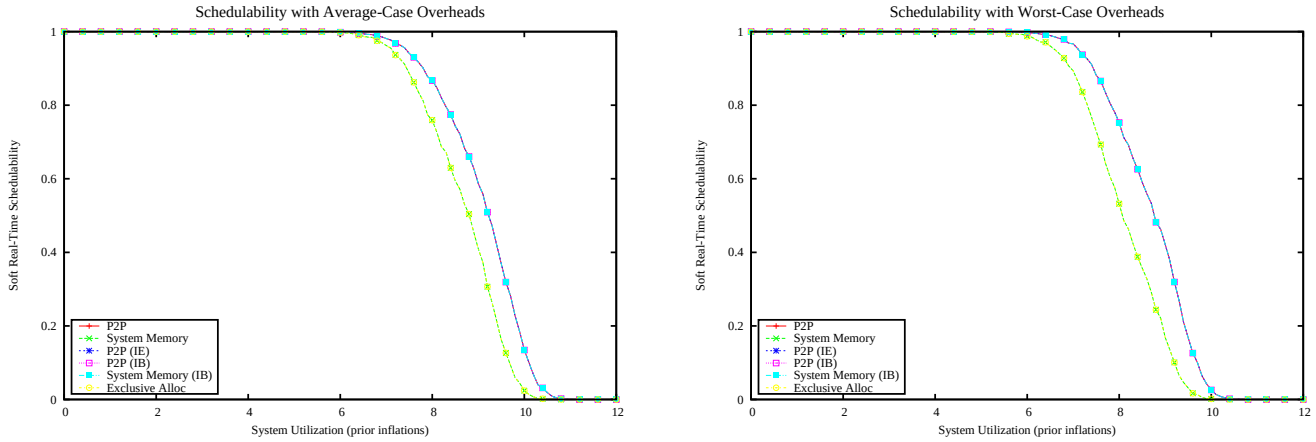

Figure 1428: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

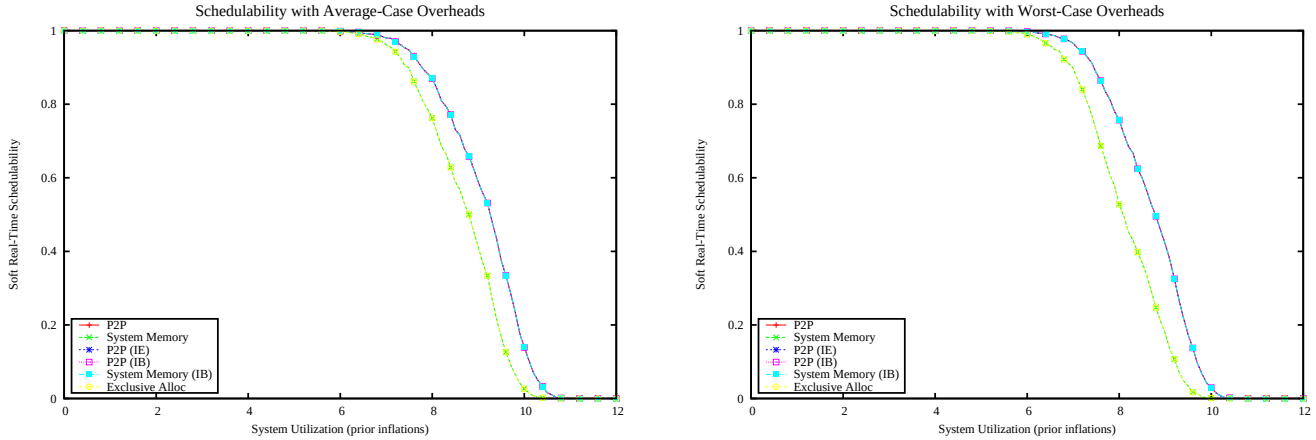

Figure 1429: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

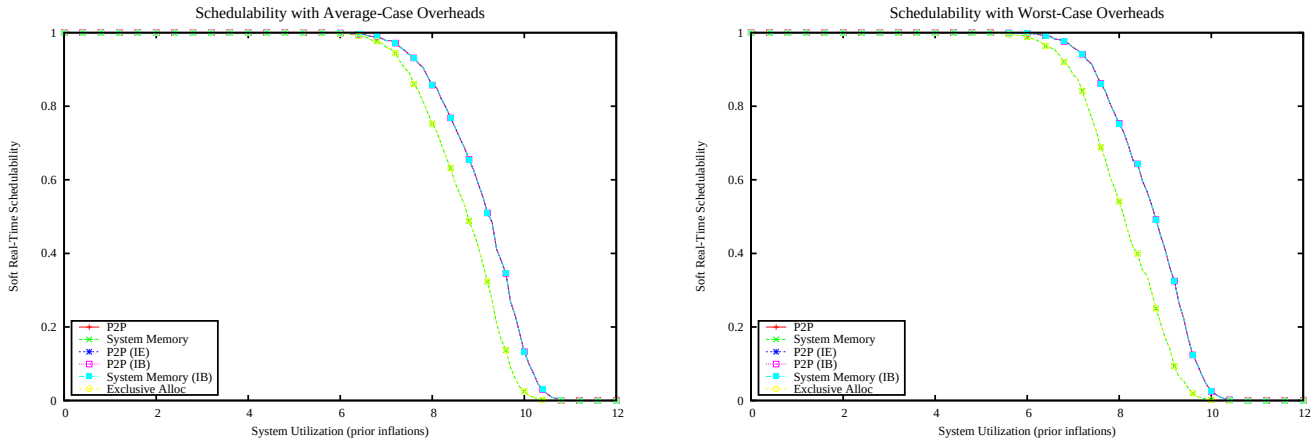

Figure 1430: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

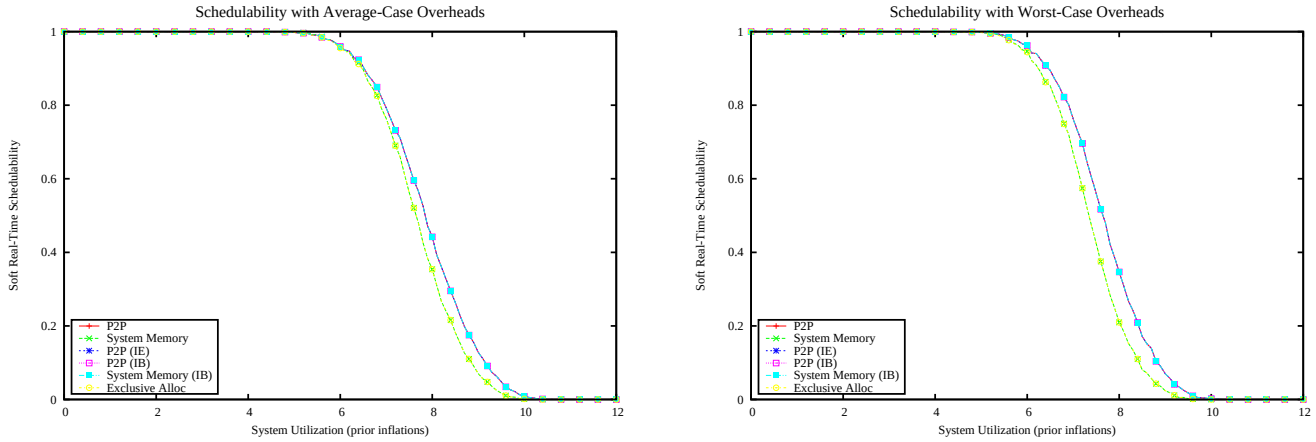

Figure 1431: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

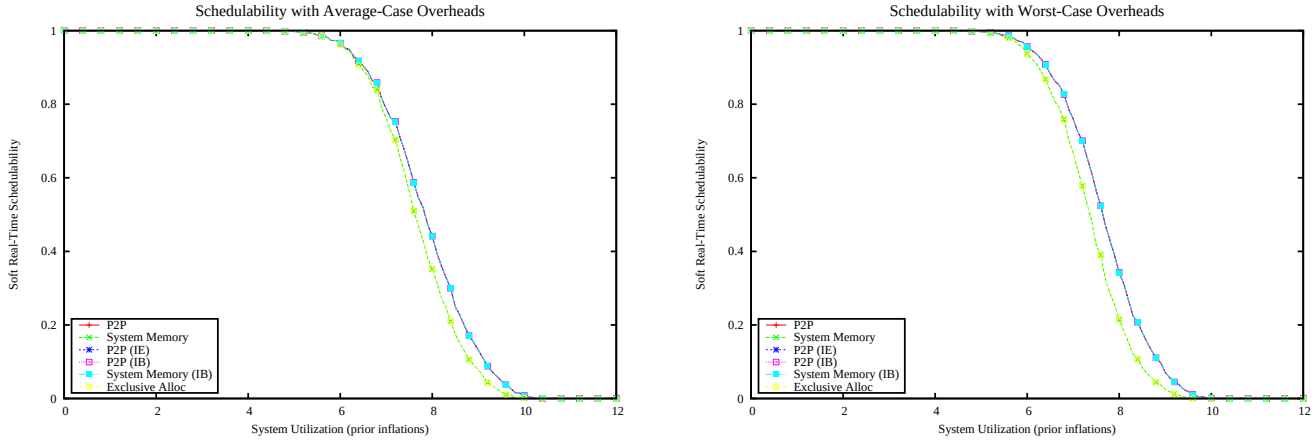

Figure 1432: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

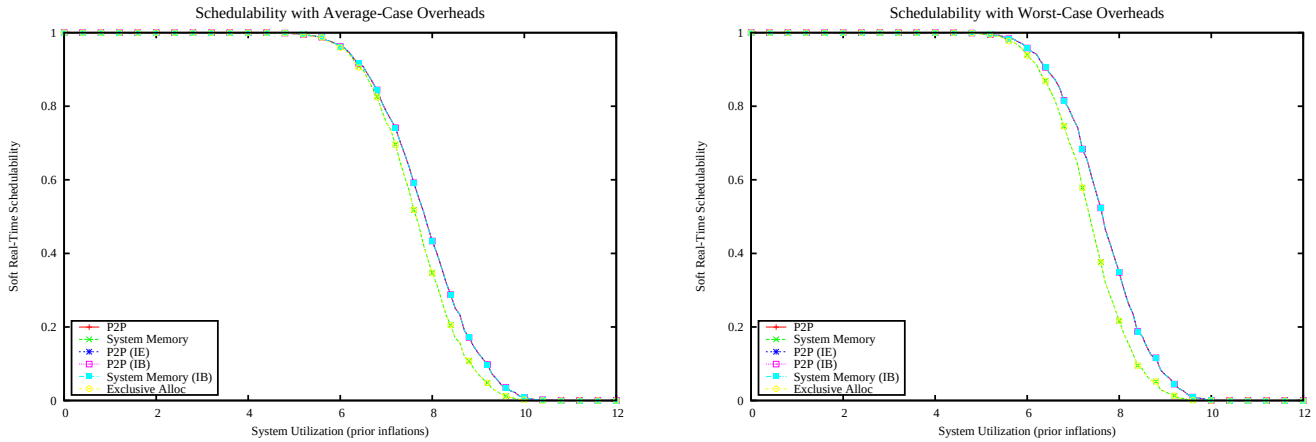

Figure 1433: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

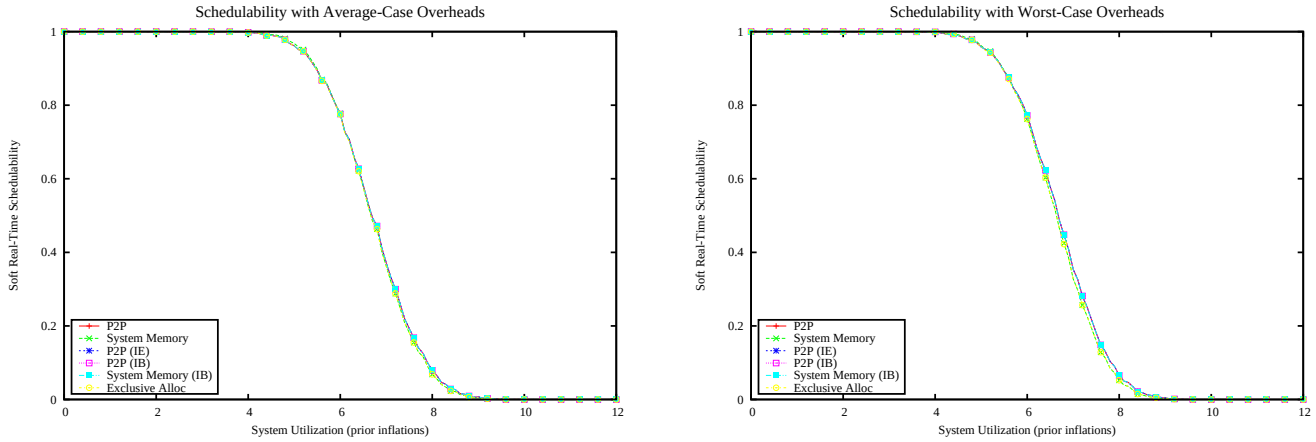

Figure 1434: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

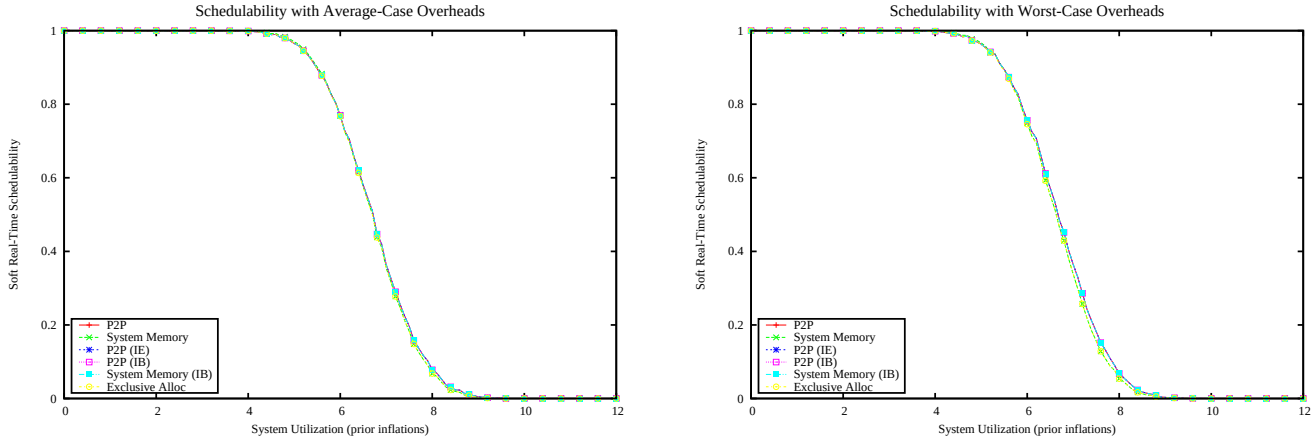

Figure 1435: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

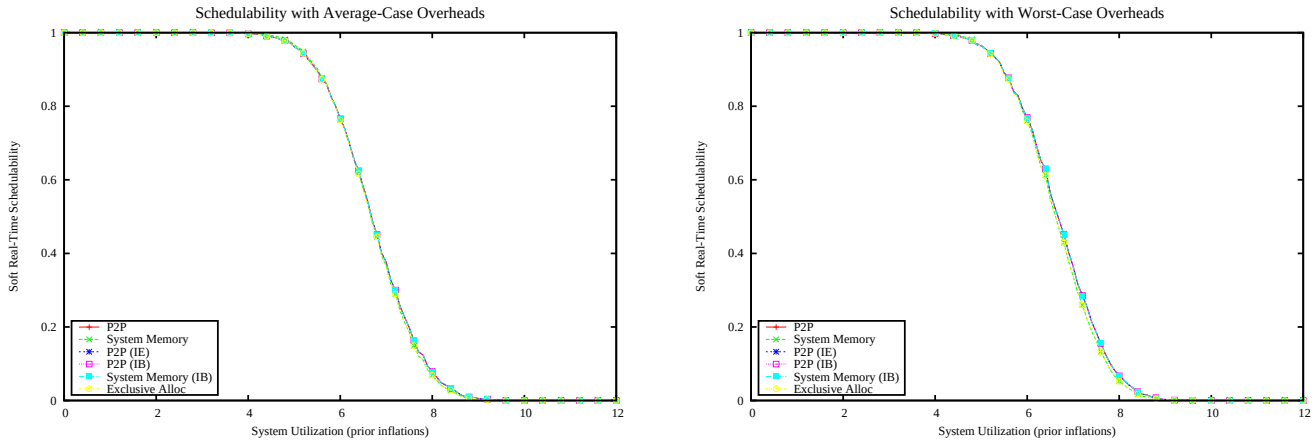

Figure 1436: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

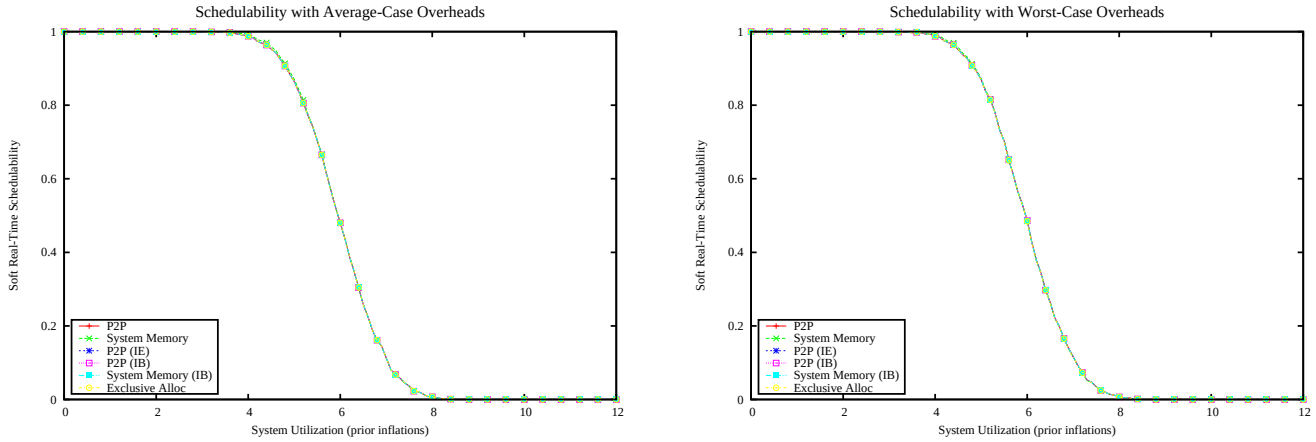

Figure 1437: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

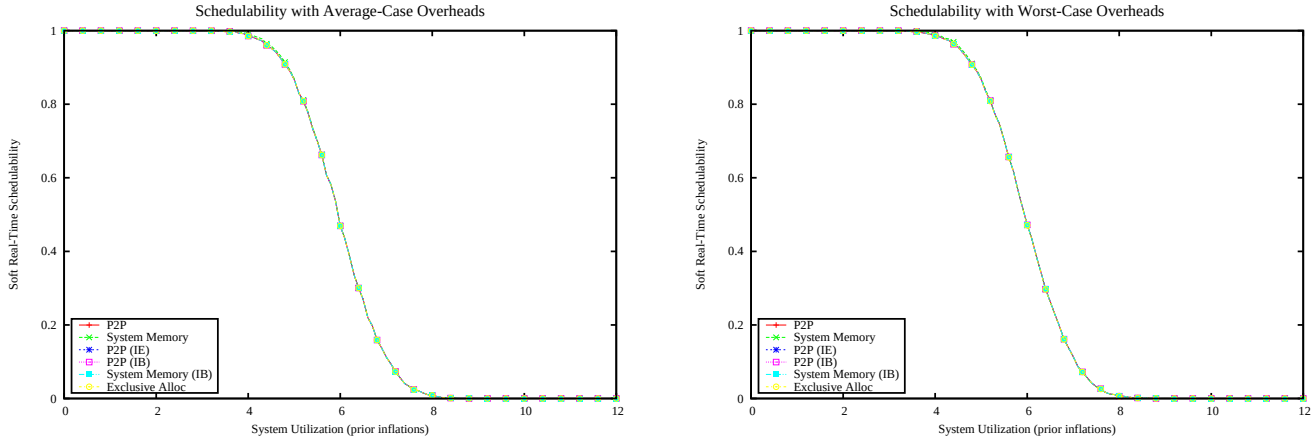

Figure 1438: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

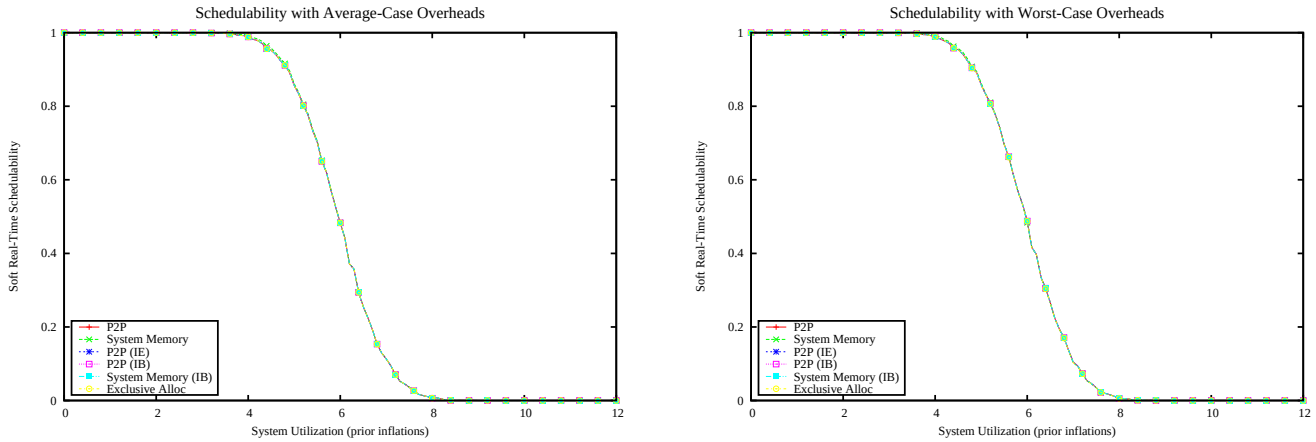

Figure 1439: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

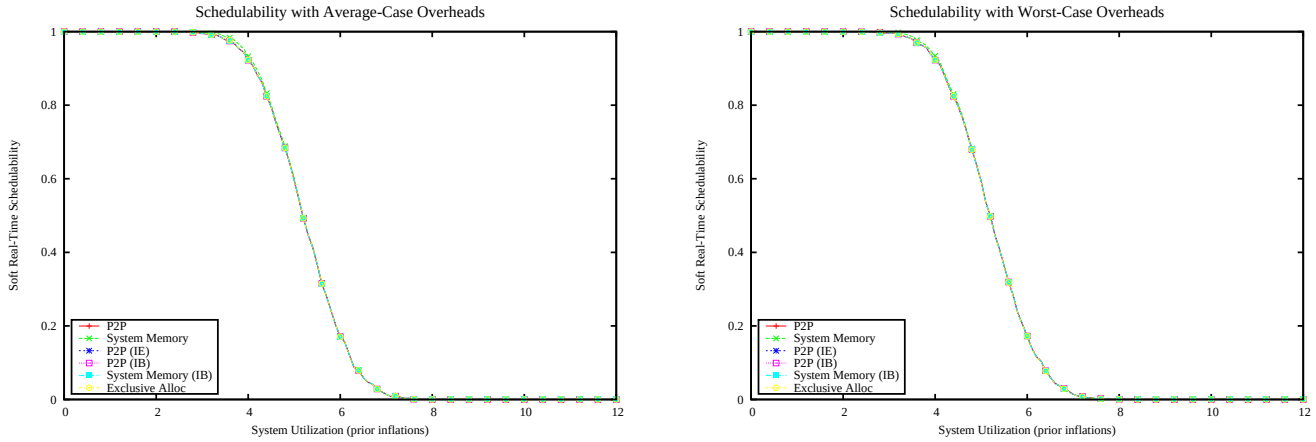

Figure 1440: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

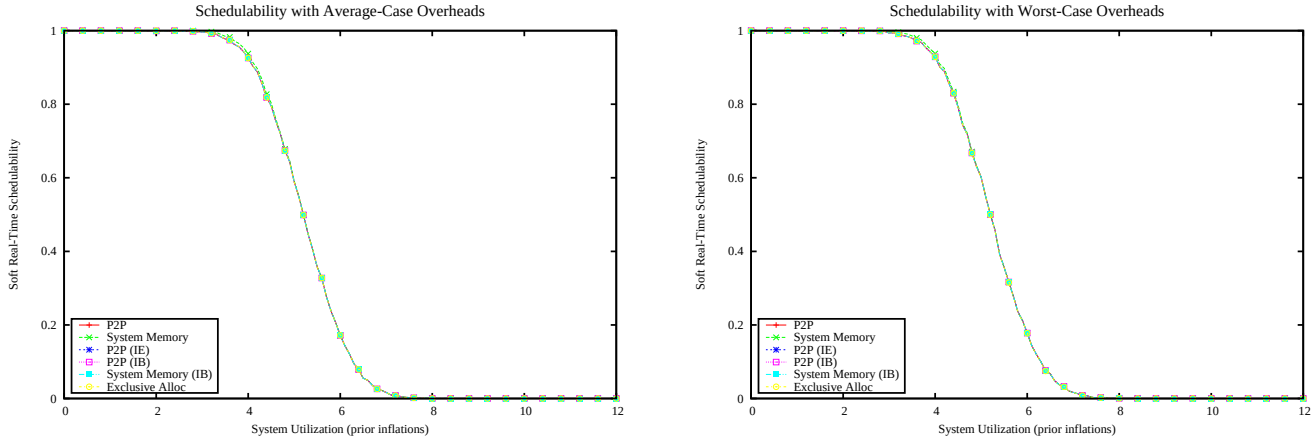

Figure 1441: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

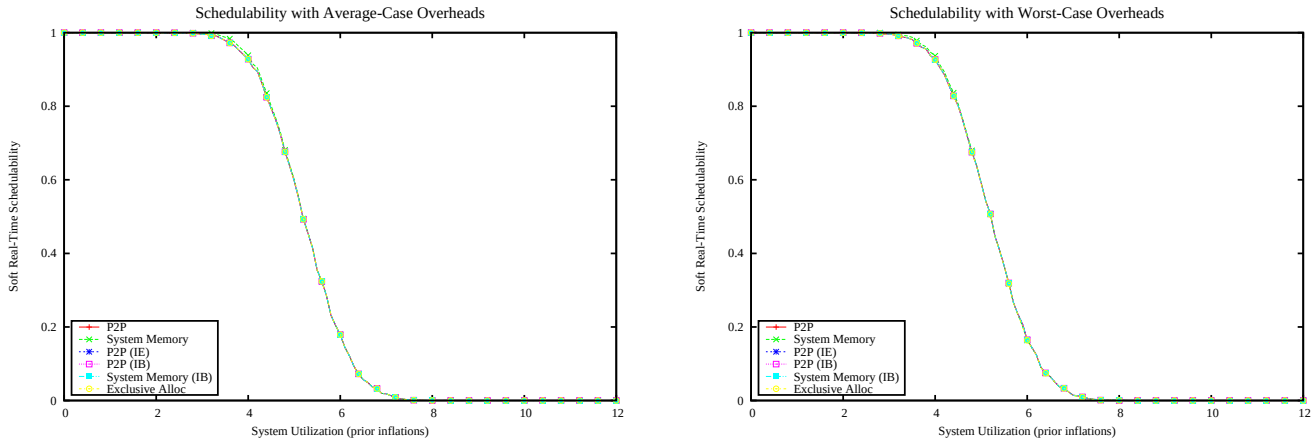

Figure 1442: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

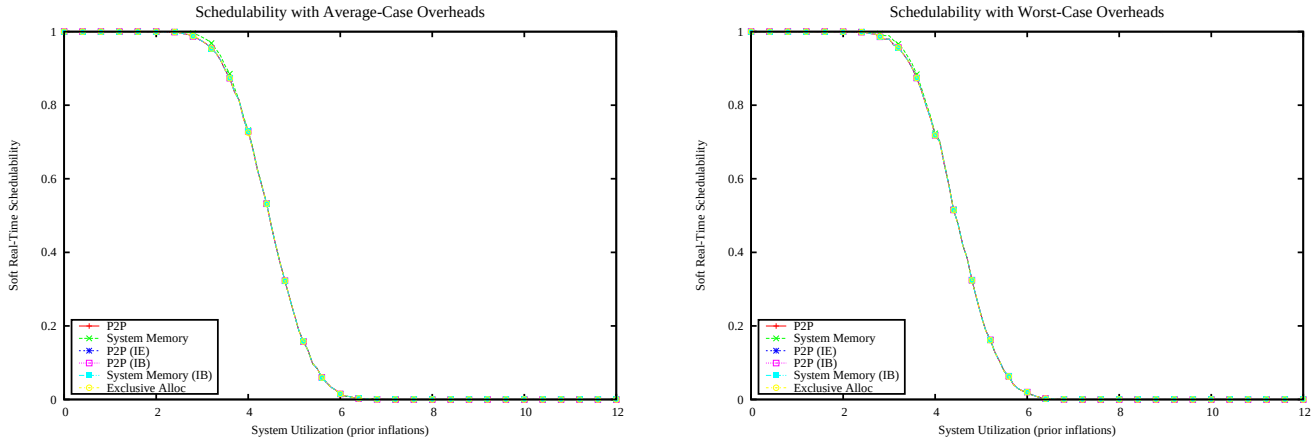

Figure 1443: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

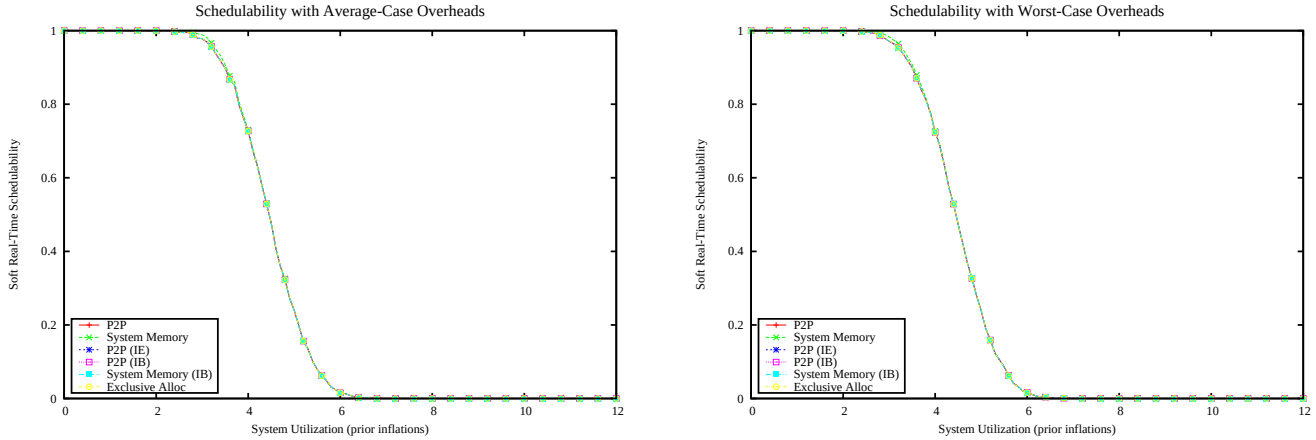

Figure 1444: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

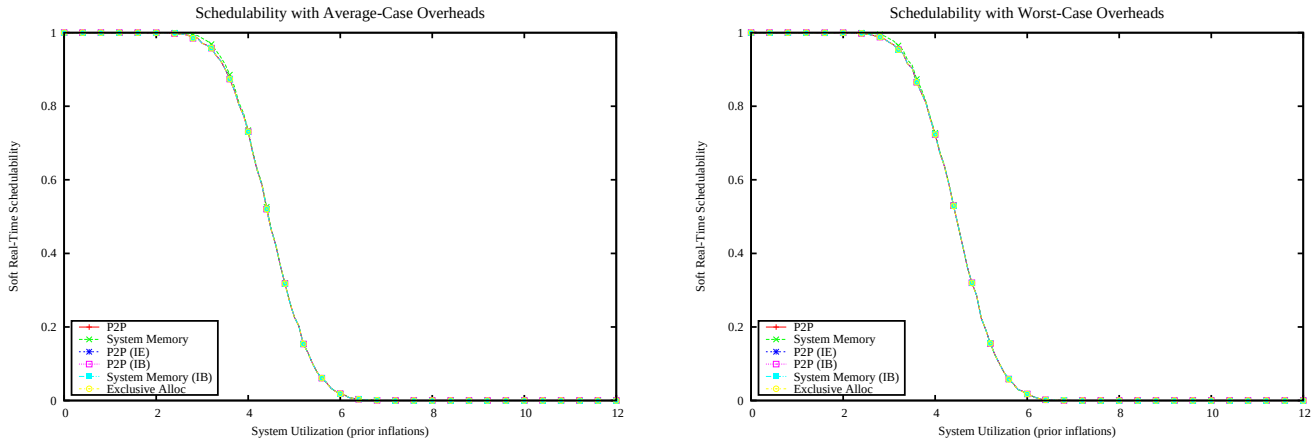

Figure 1445: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

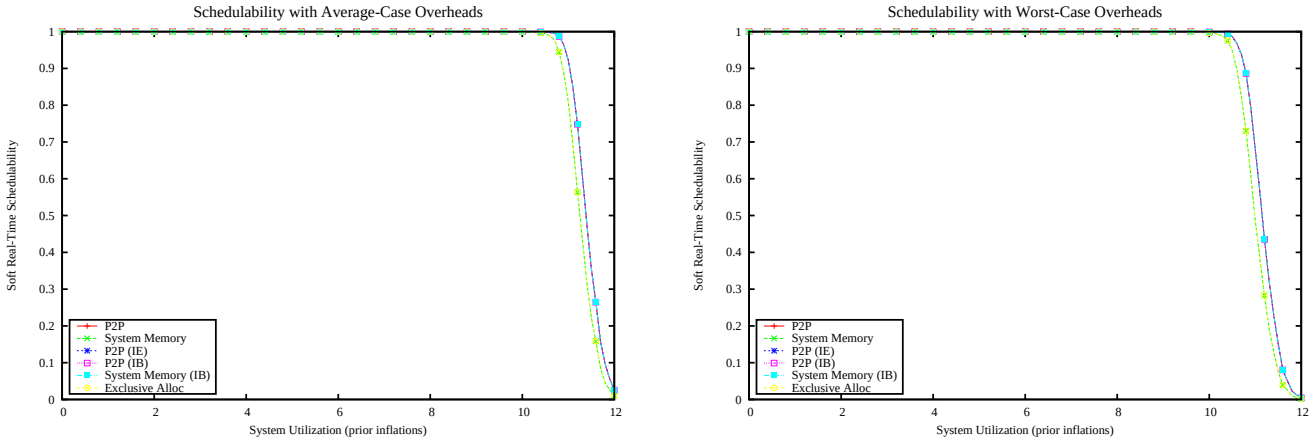

Figure 1446: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

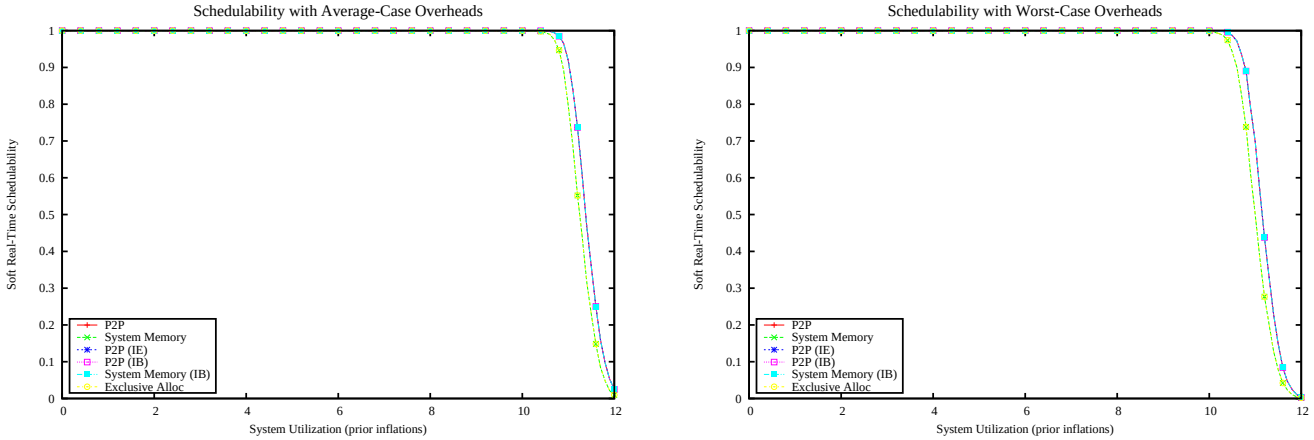

Figure 1447: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

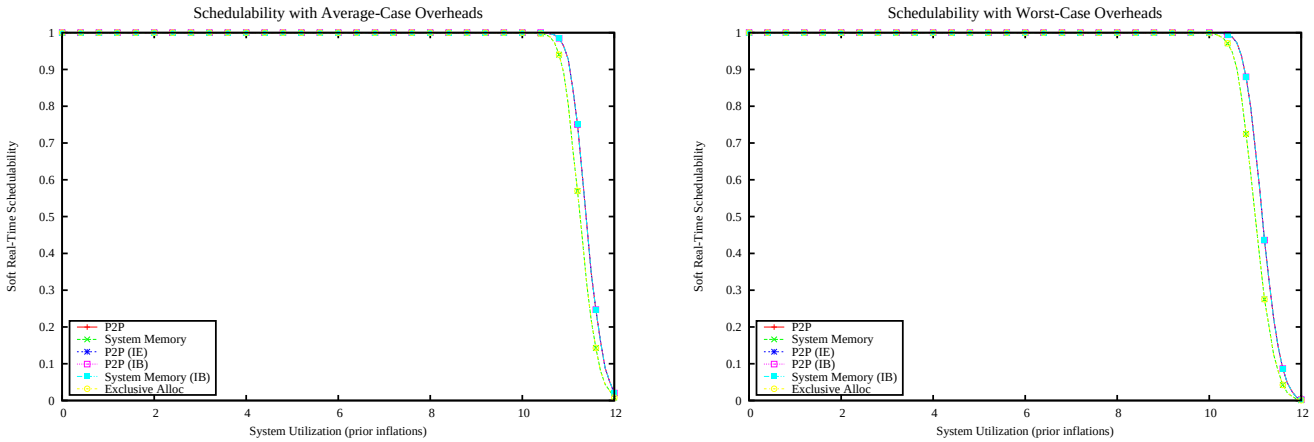

Figure 1448: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

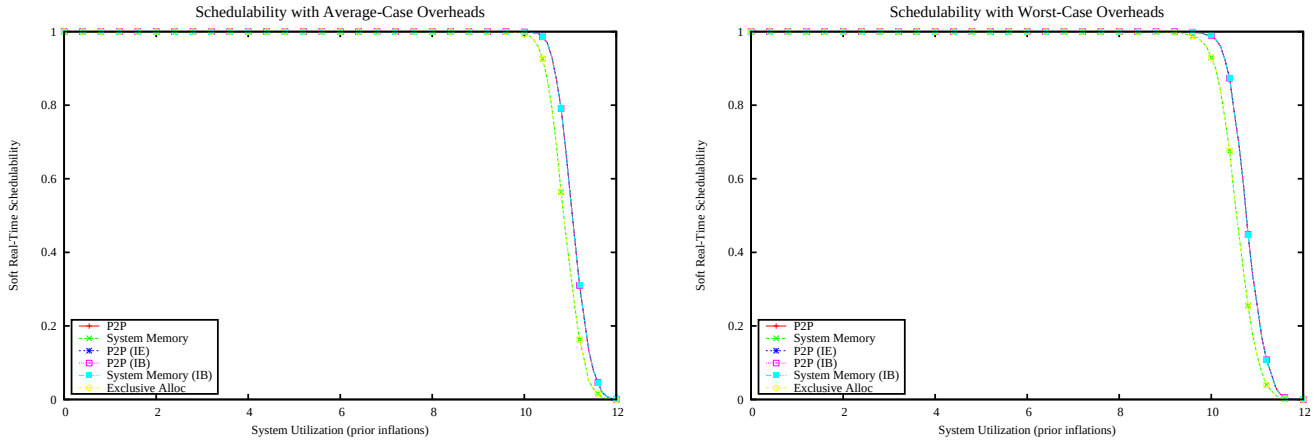

Figure 1449: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

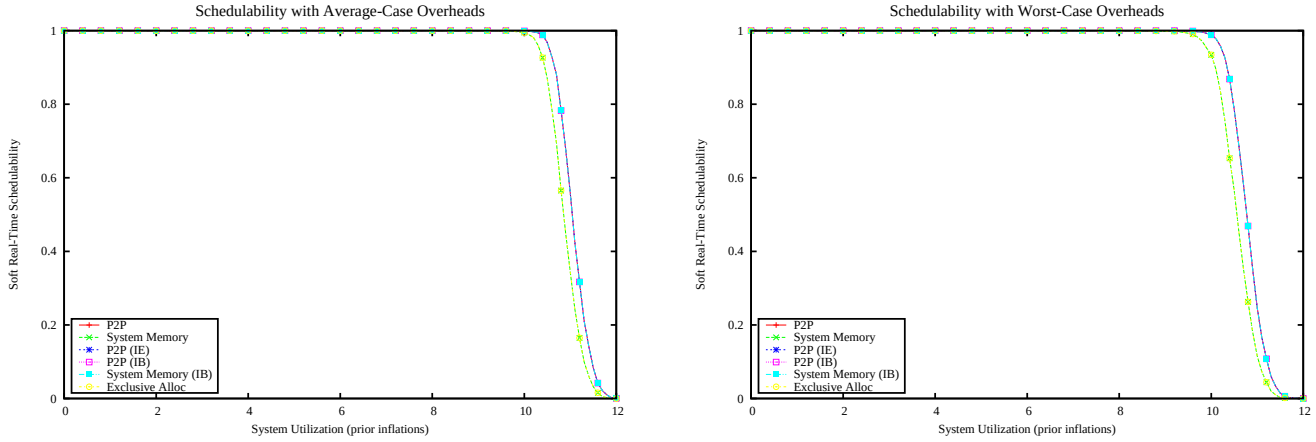

Figure 1450: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

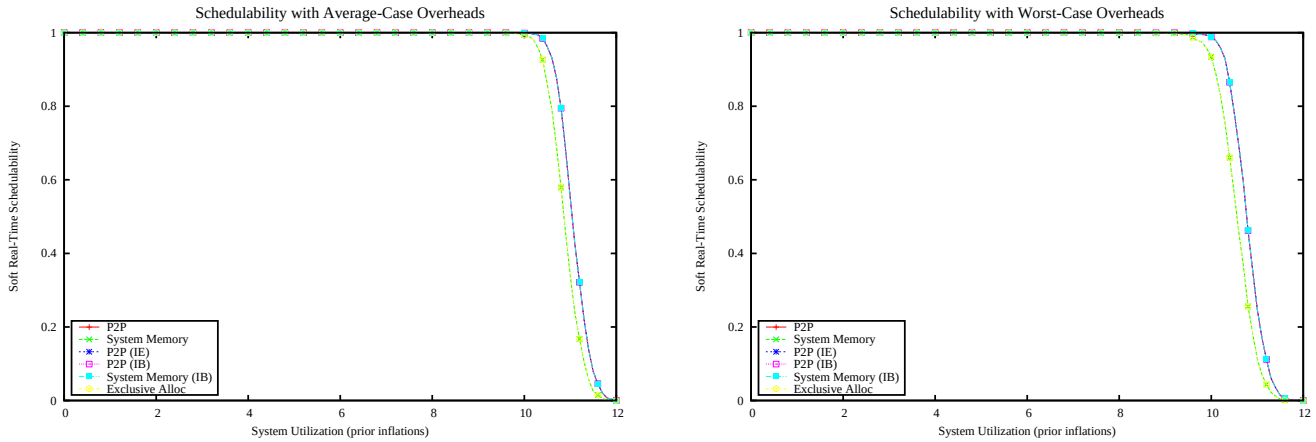

Figure 1451: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

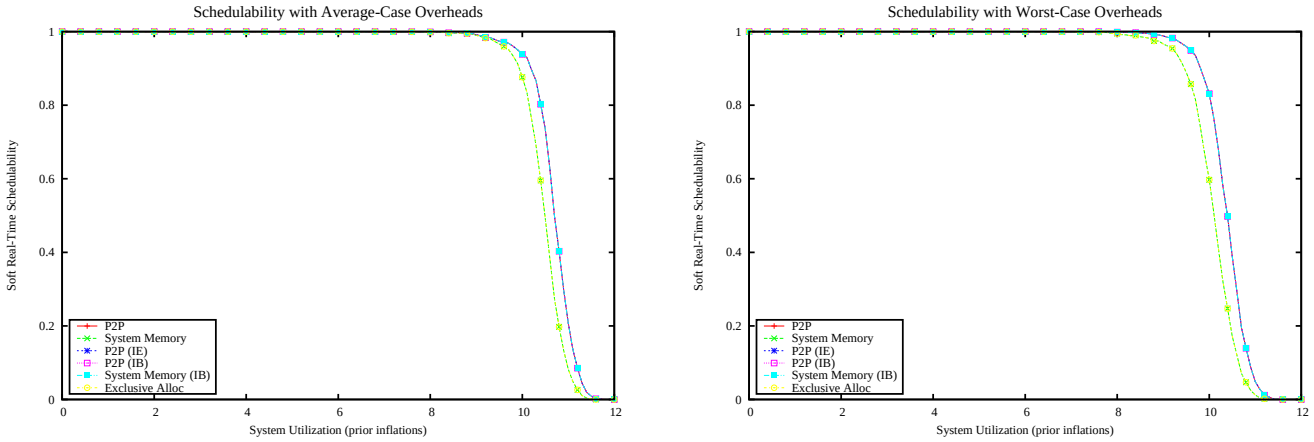

Figure 1452: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

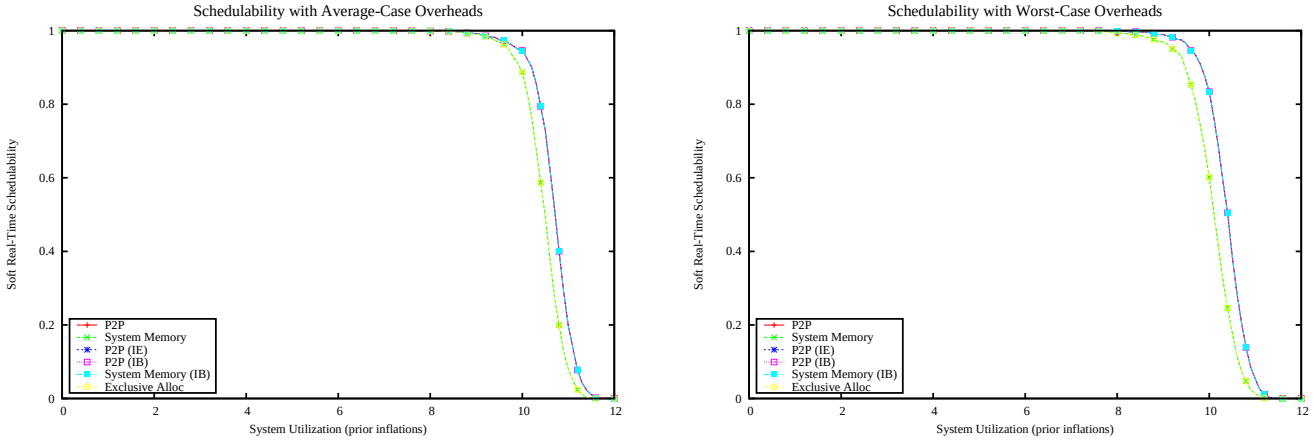

Figure 1453: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

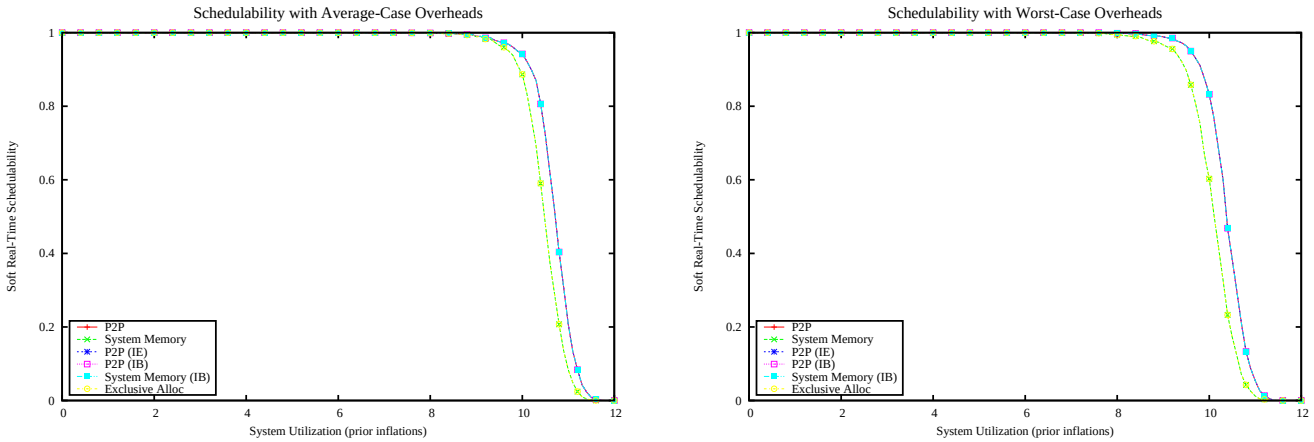

Figure 1454: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

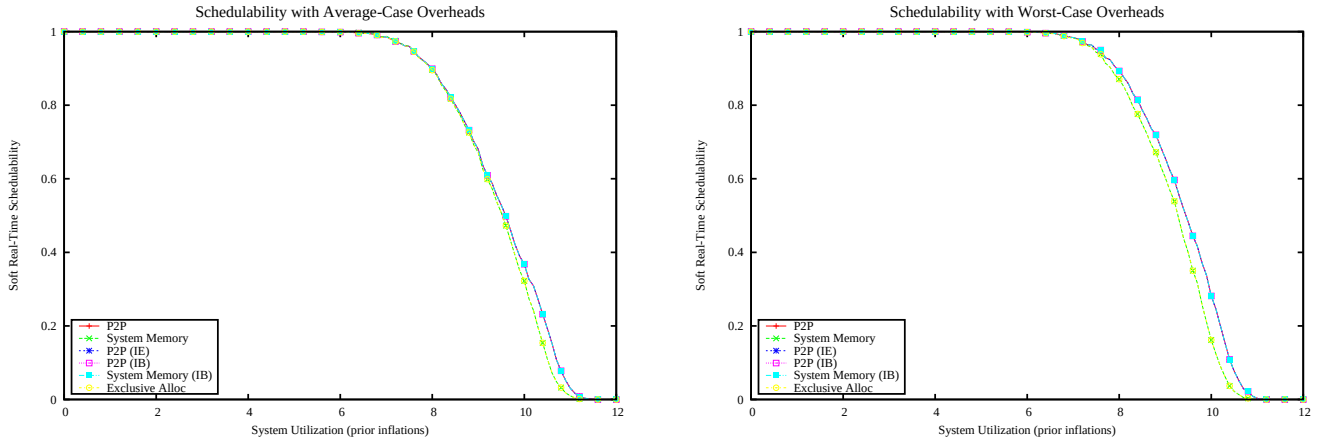

Figure 1455: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

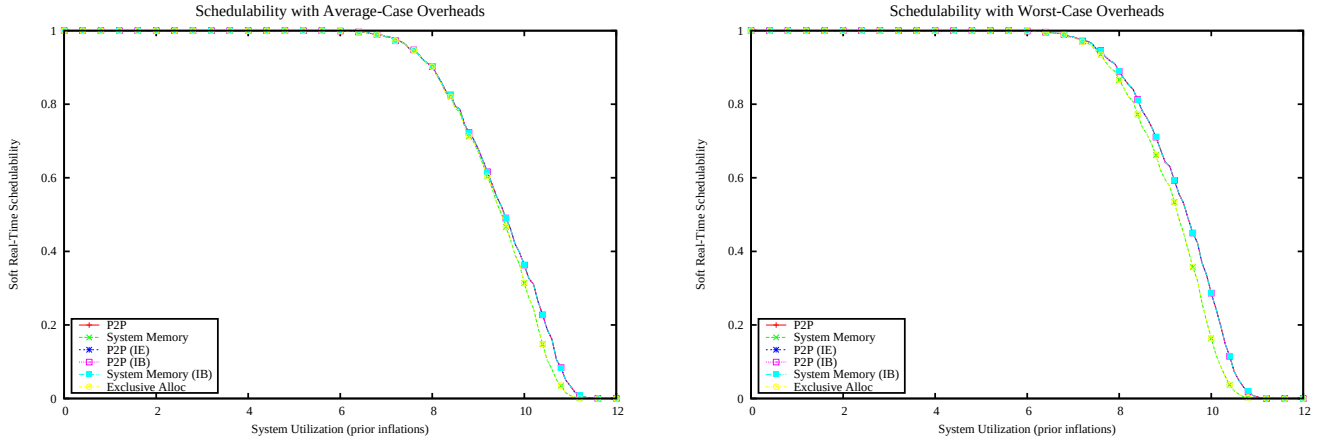

Figure 1456: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

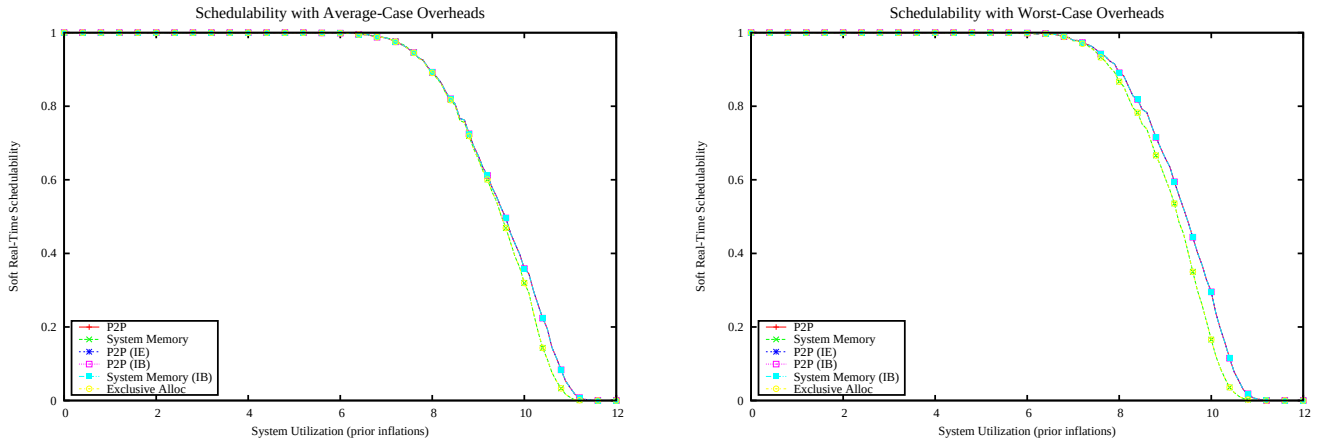

Figure 1457: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

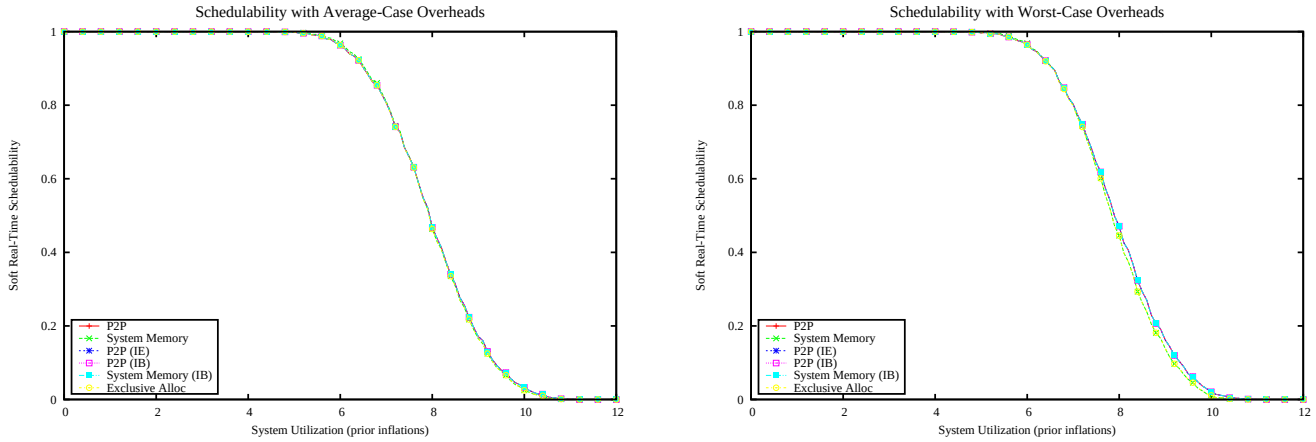

Figure 1458: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

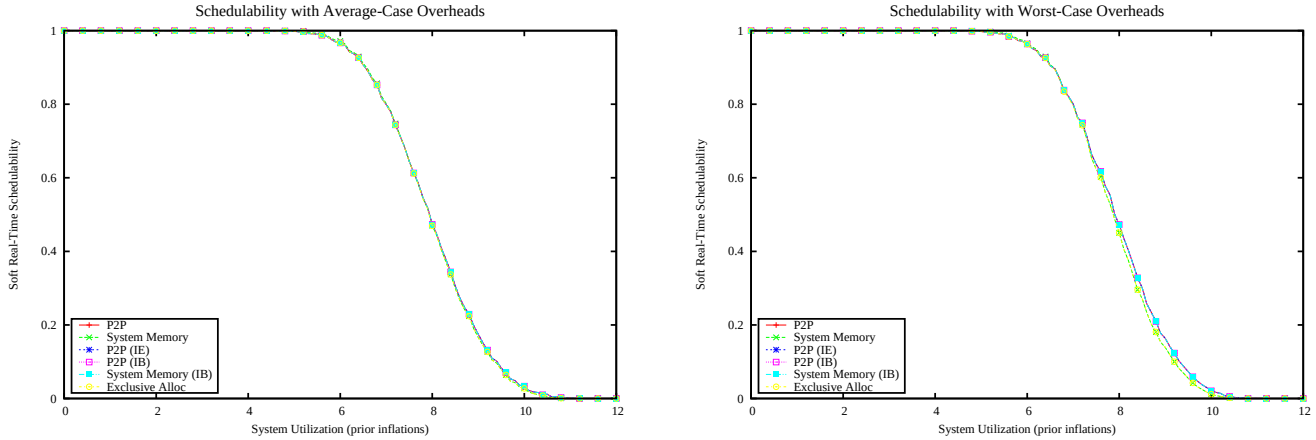

Figure 1459: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

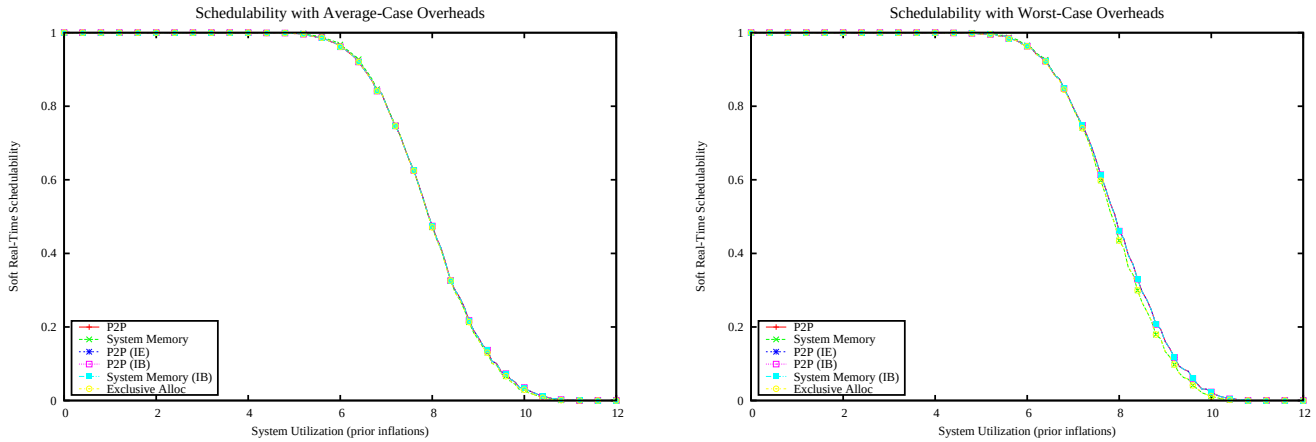

Figure 1460: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

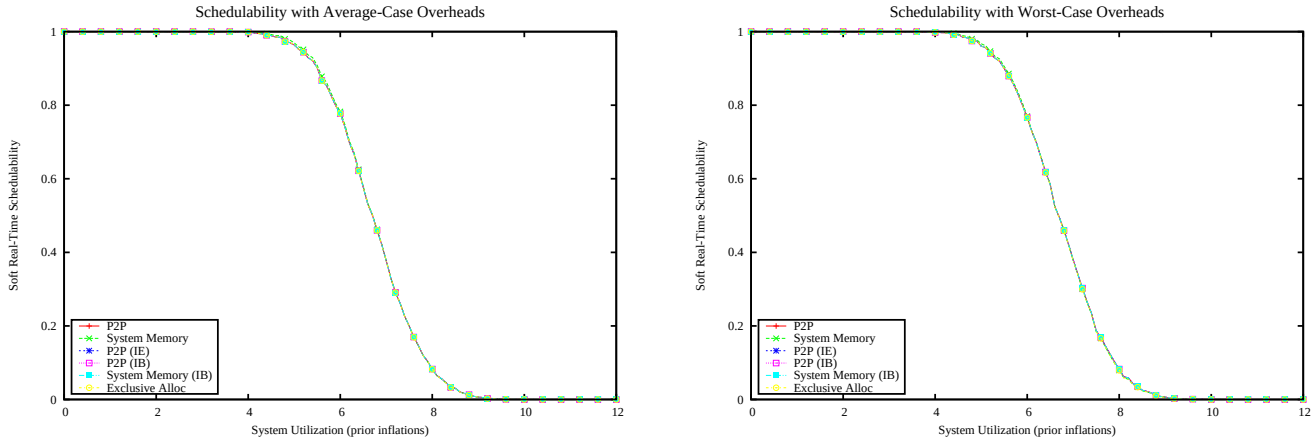

Figure 1461: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

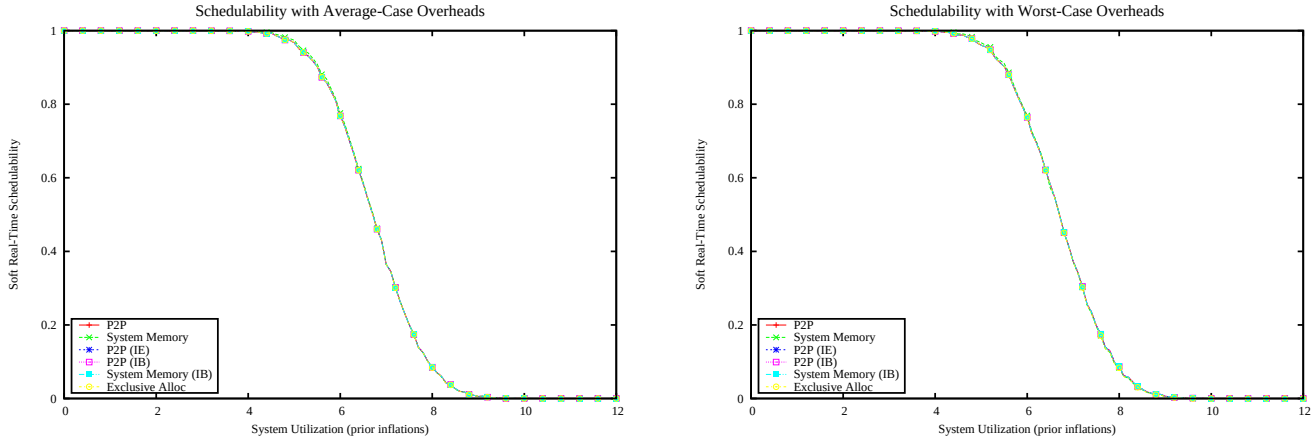

Figure 1462: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

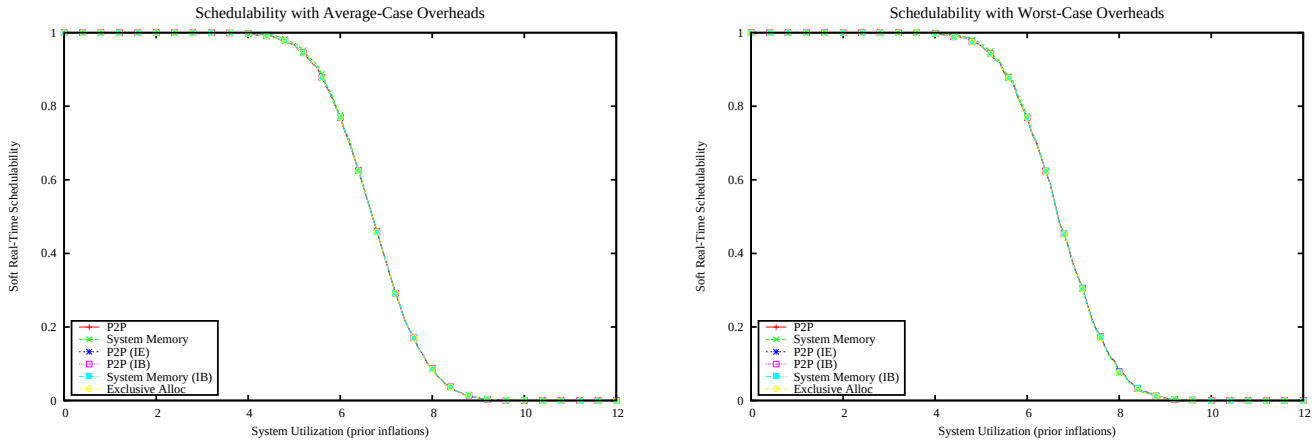

Figure 1463: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

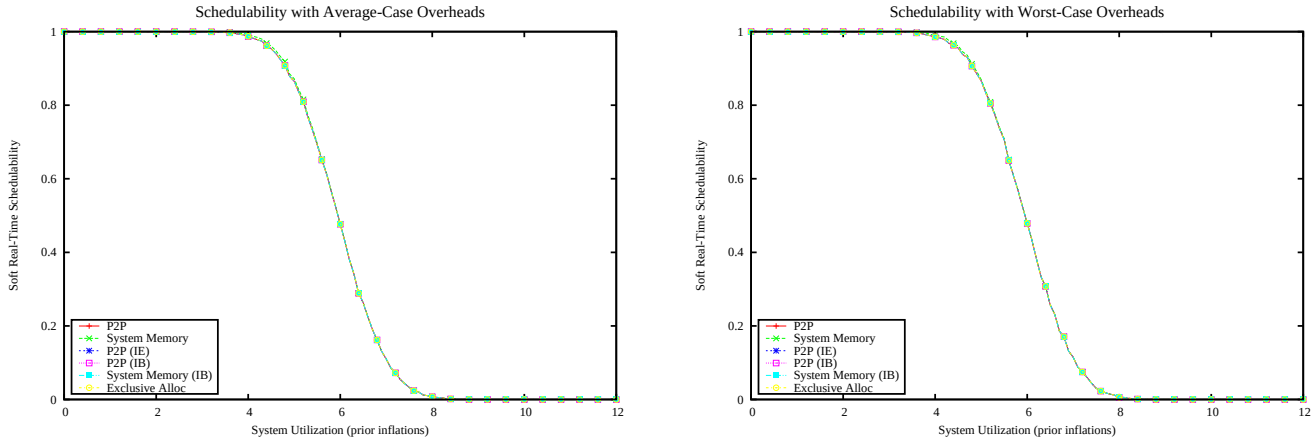

Figure 1464: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

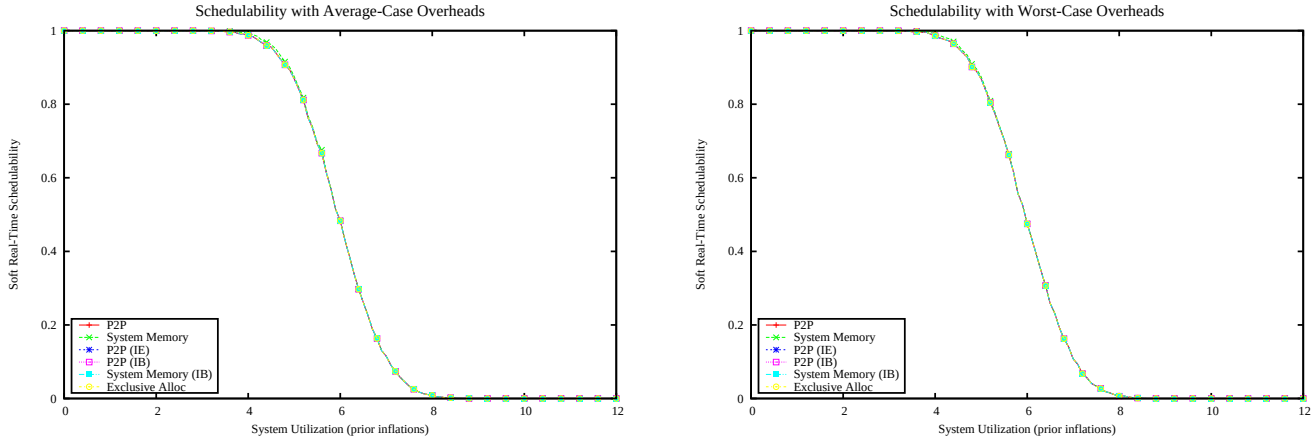

Figure 1465: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

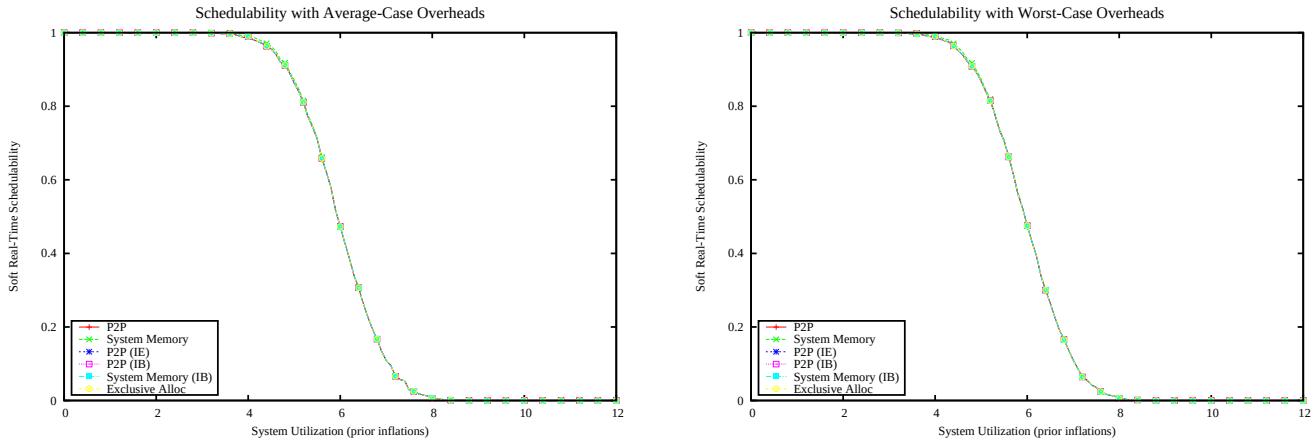

Figure 1466: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

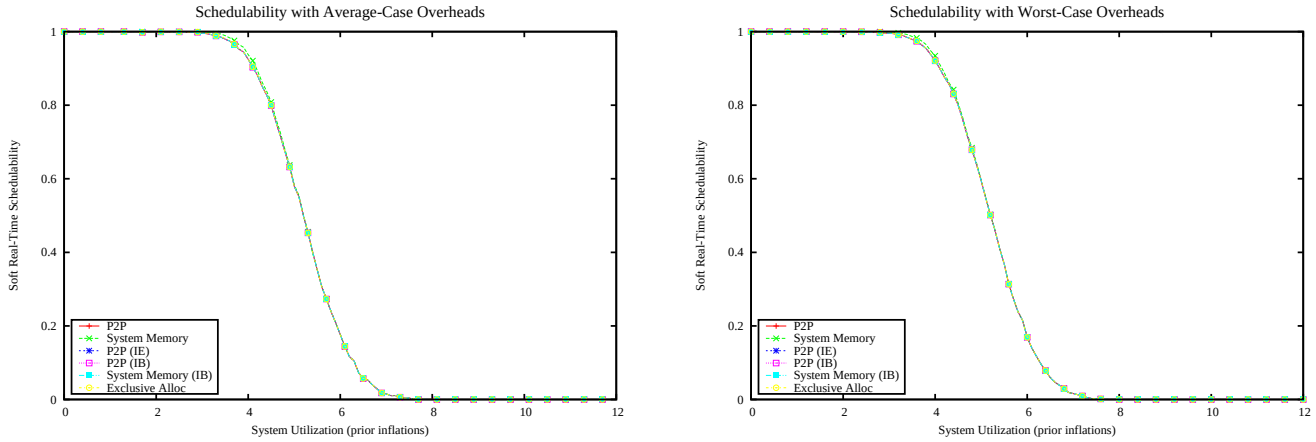

Figure 1467: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

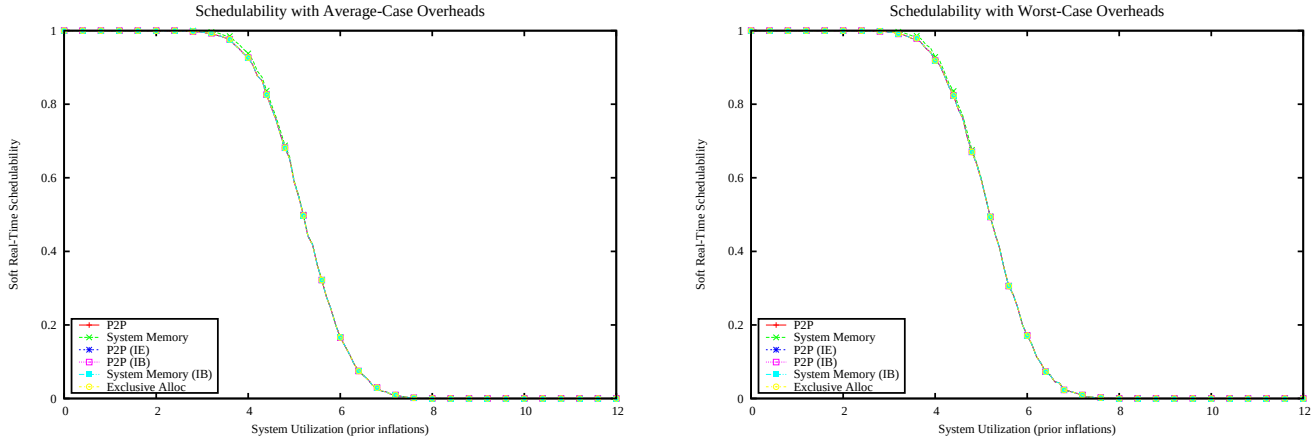

Figure 1468: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

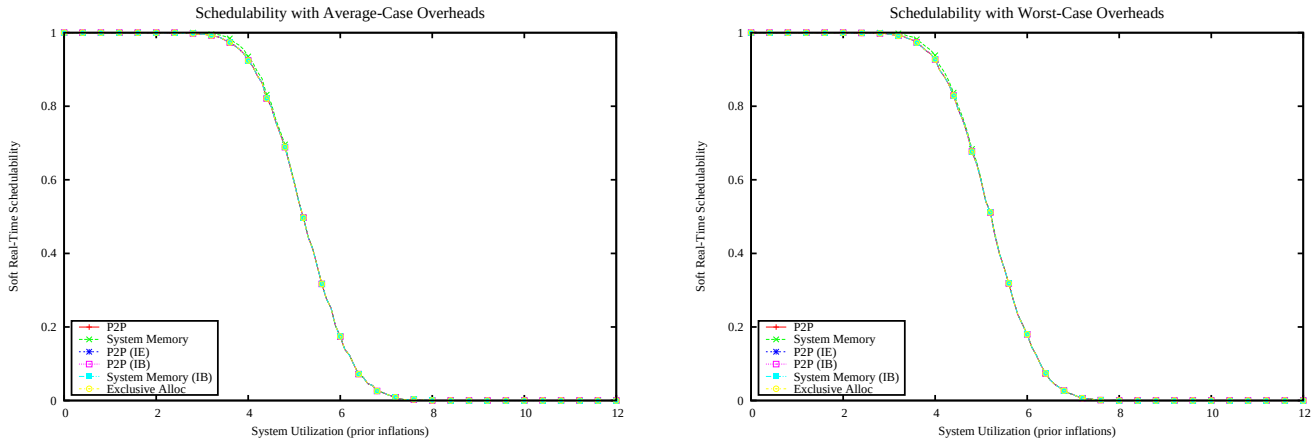

Figure 1469: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

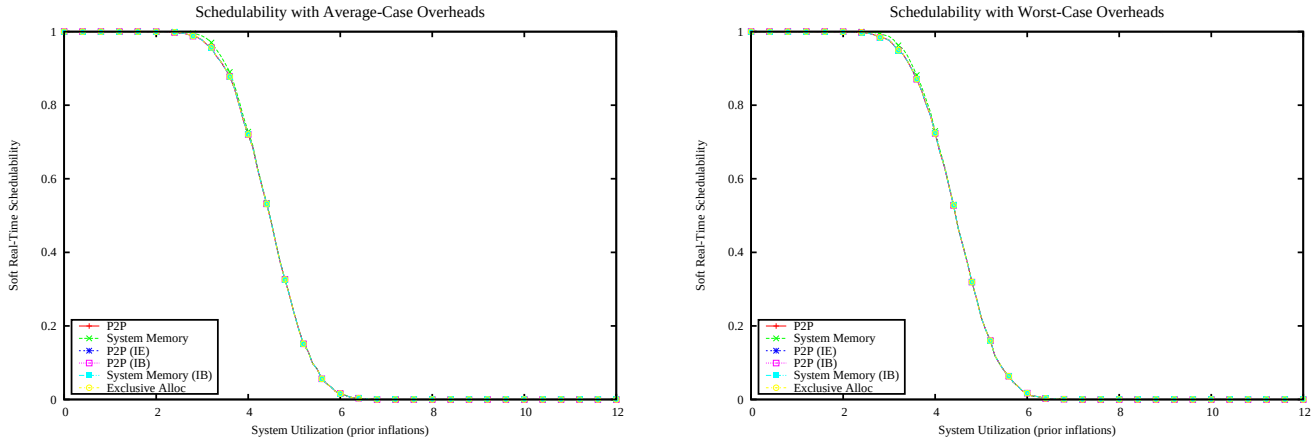

Figure 1470: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

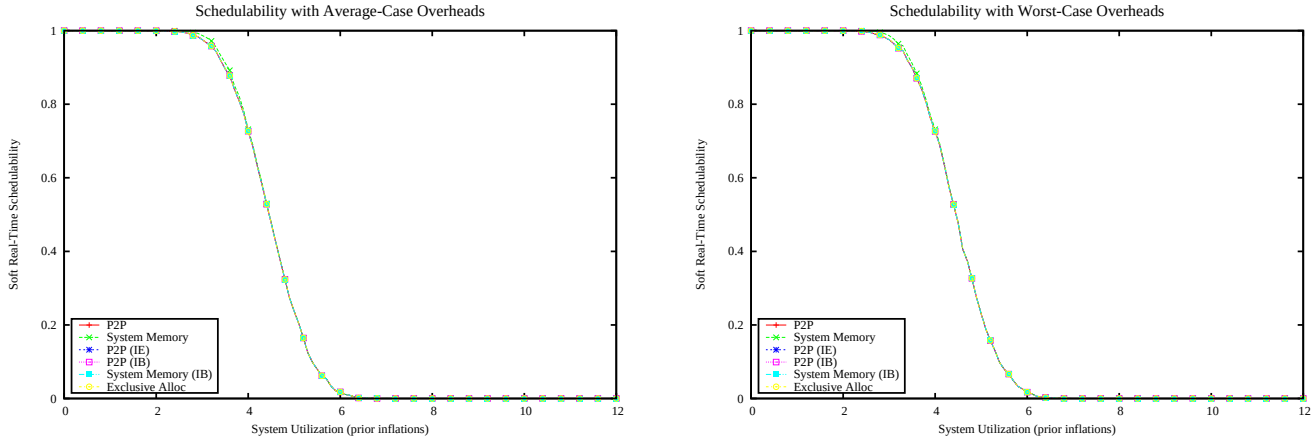

Figure 1471: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

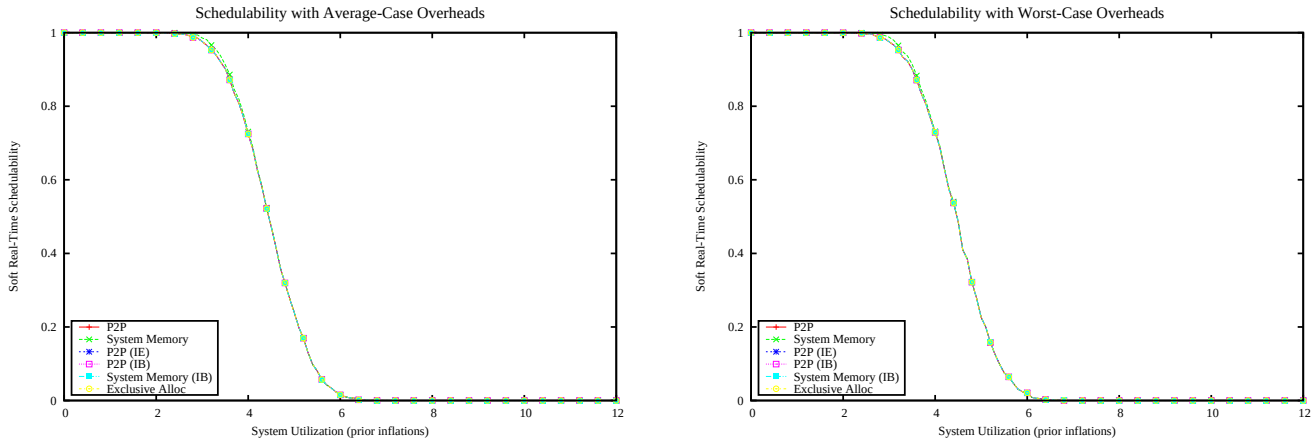

Figure 1472: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

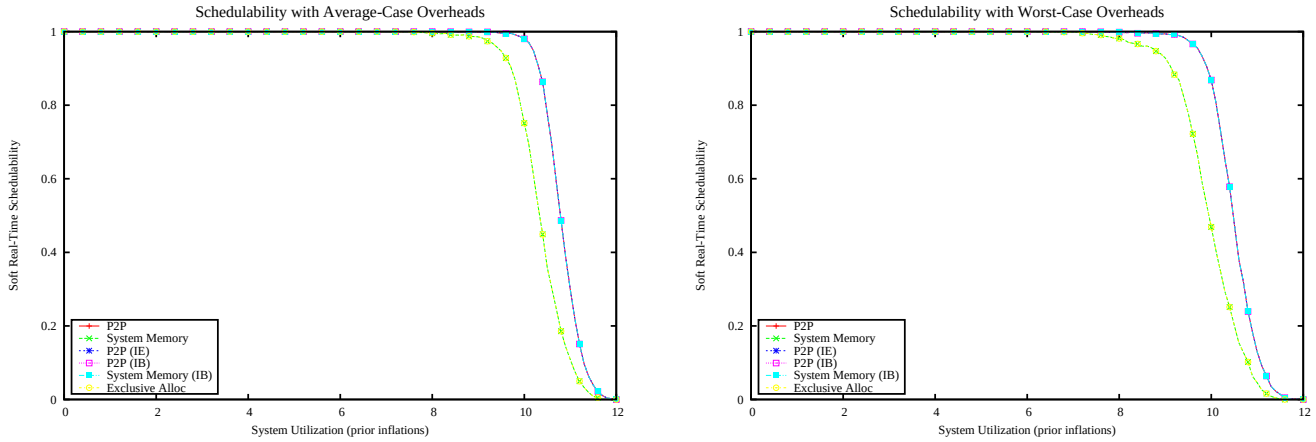

Figure 1473: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

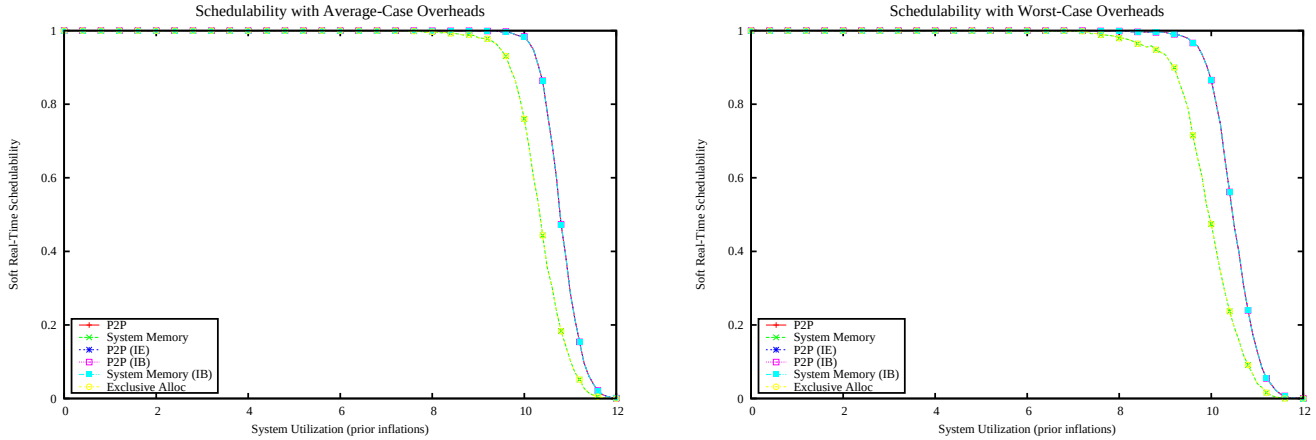

Figure 1474: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

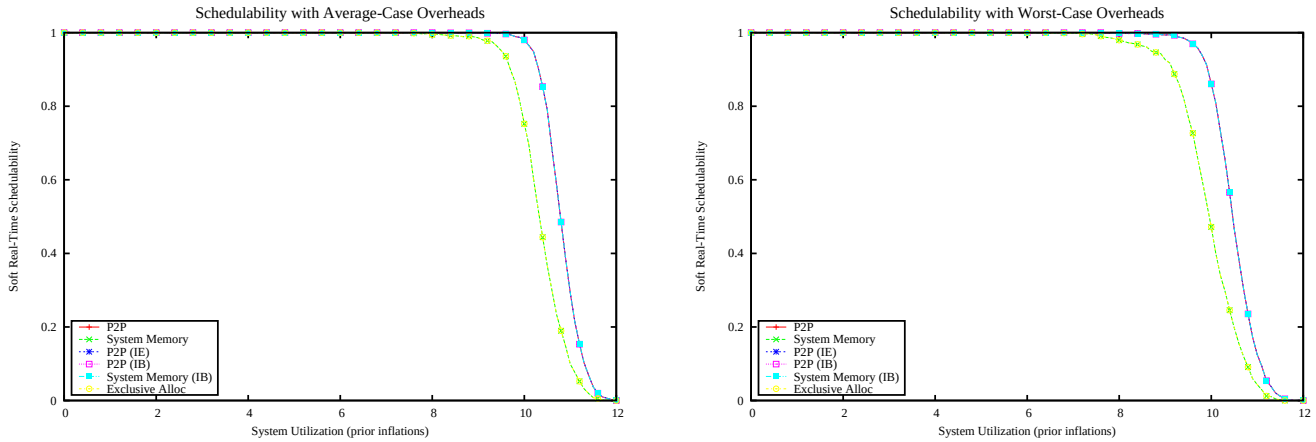

Figure 1475: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

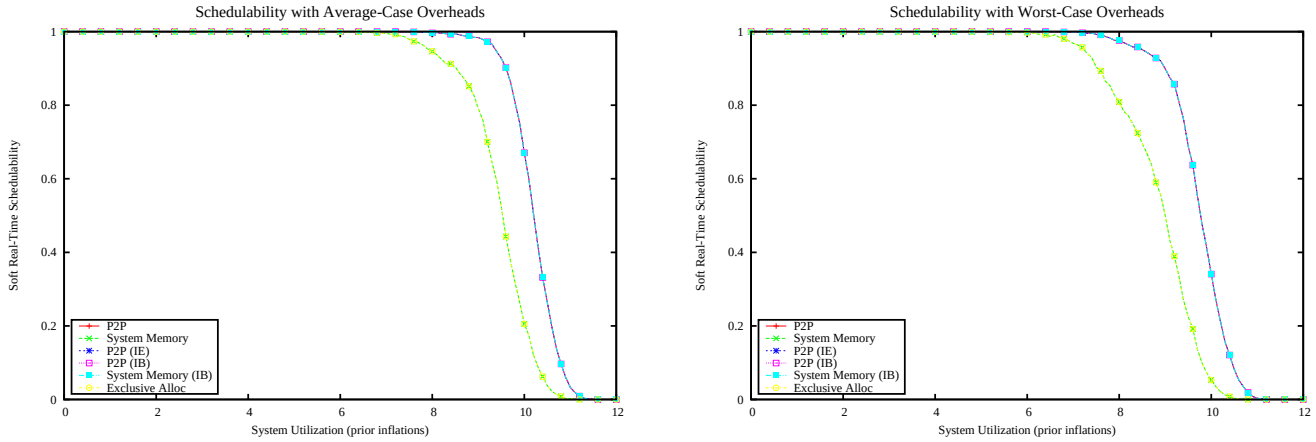

Figure 1476: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

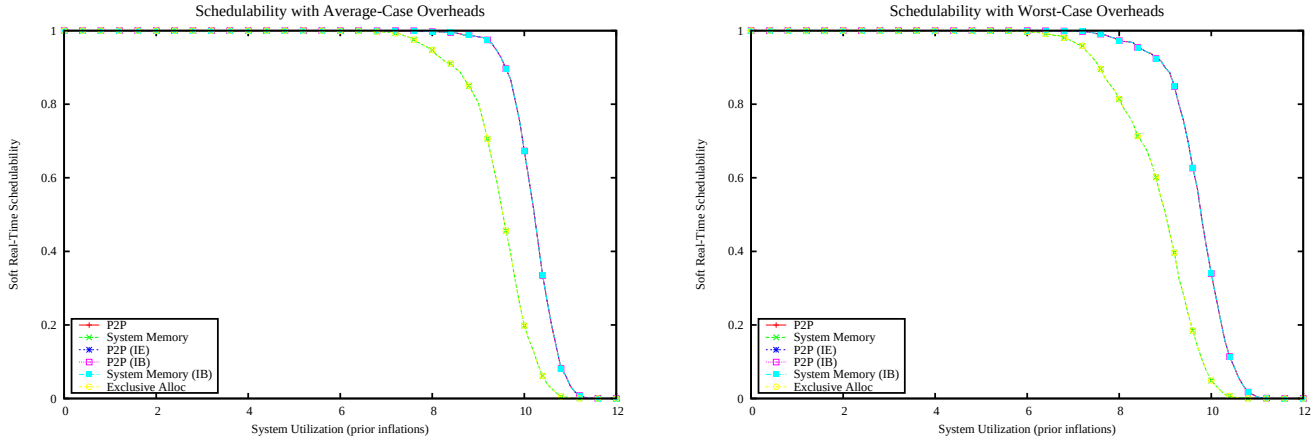

Figure 1477: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

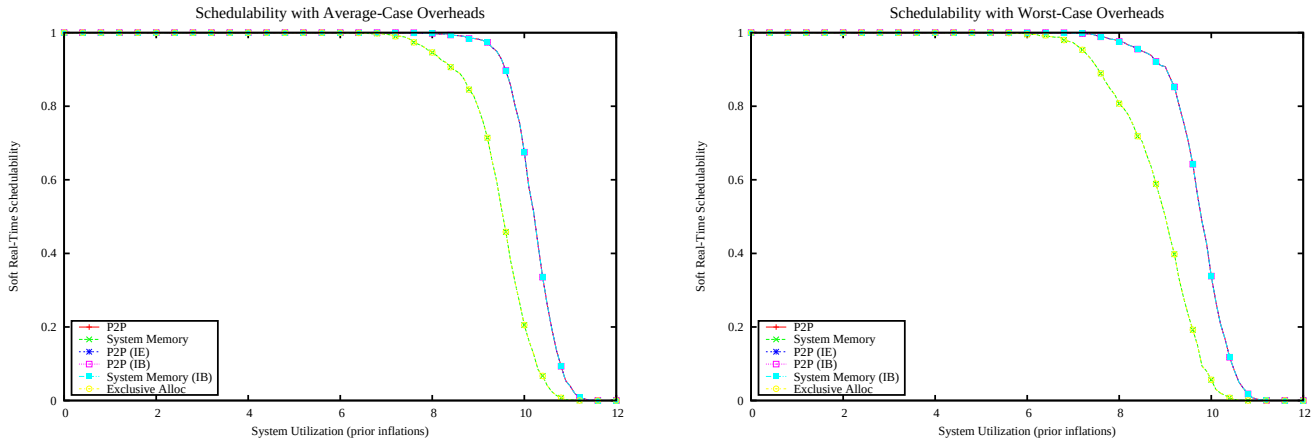

Figure 1478: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

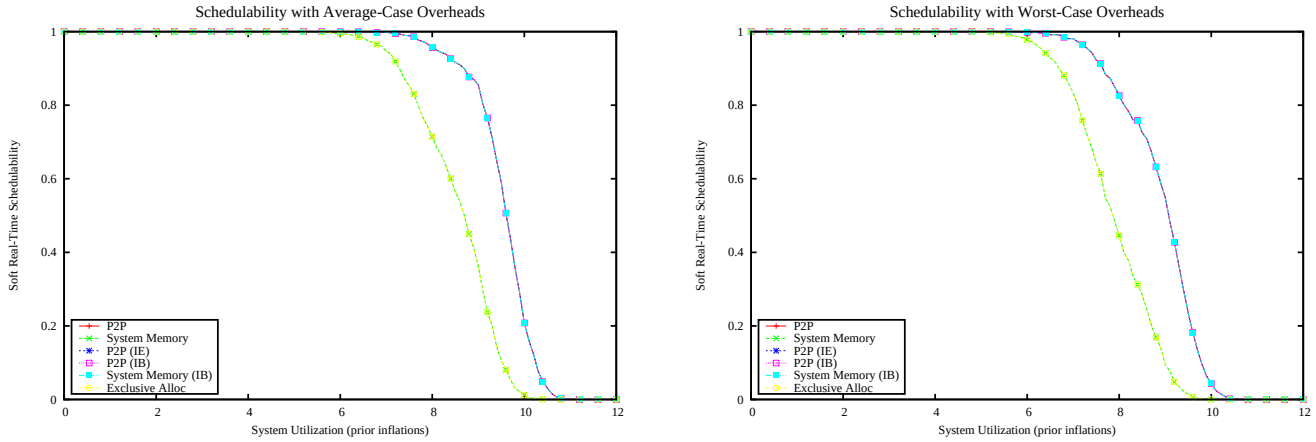

Figure 1479: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

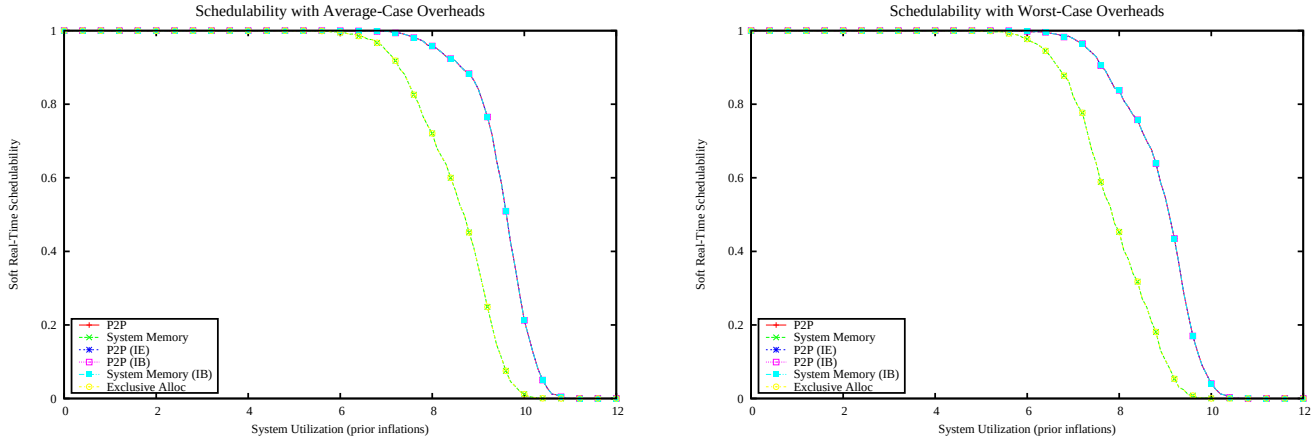

Figure 1480: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

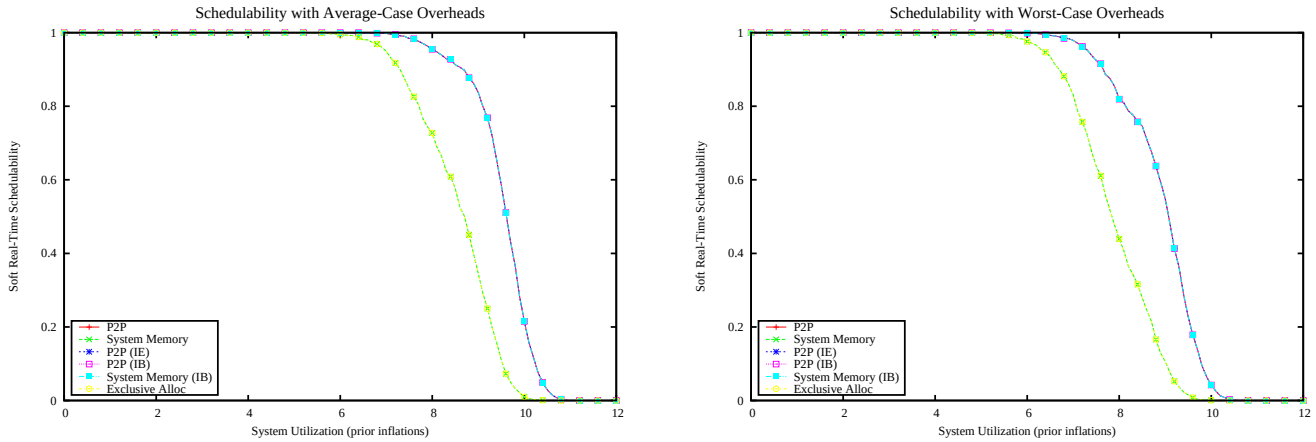

Figure 1481: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

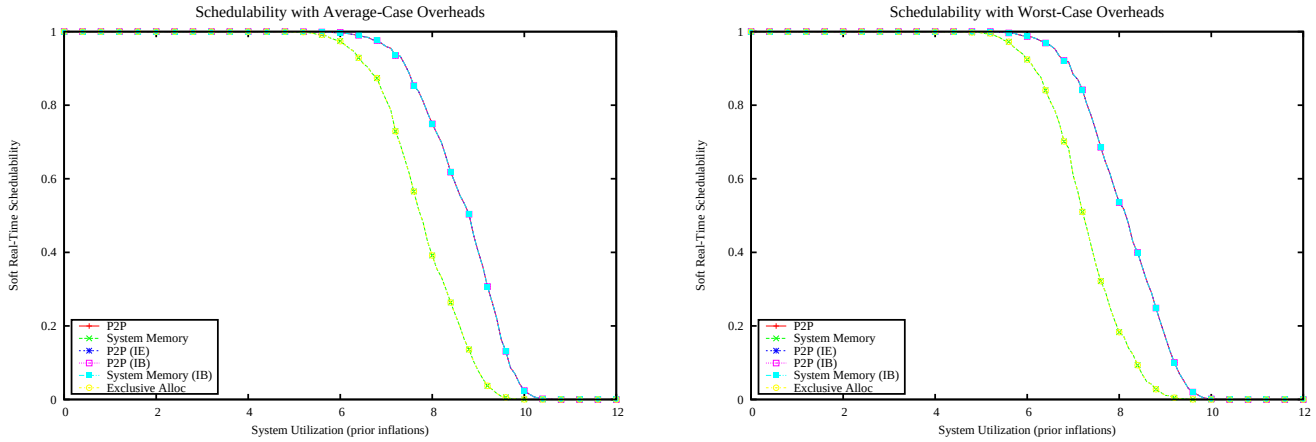

Figure 1482: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

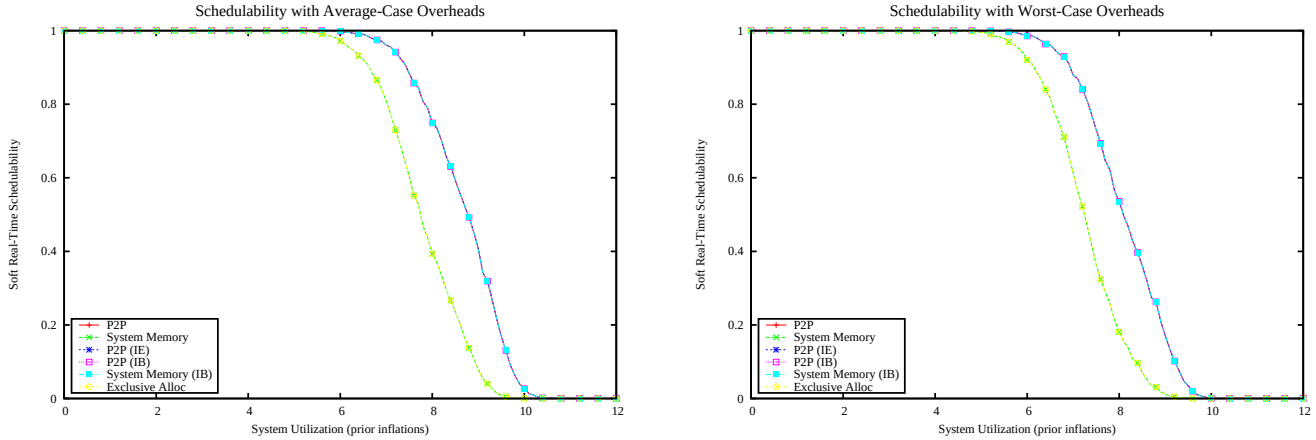

Figure 1483: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

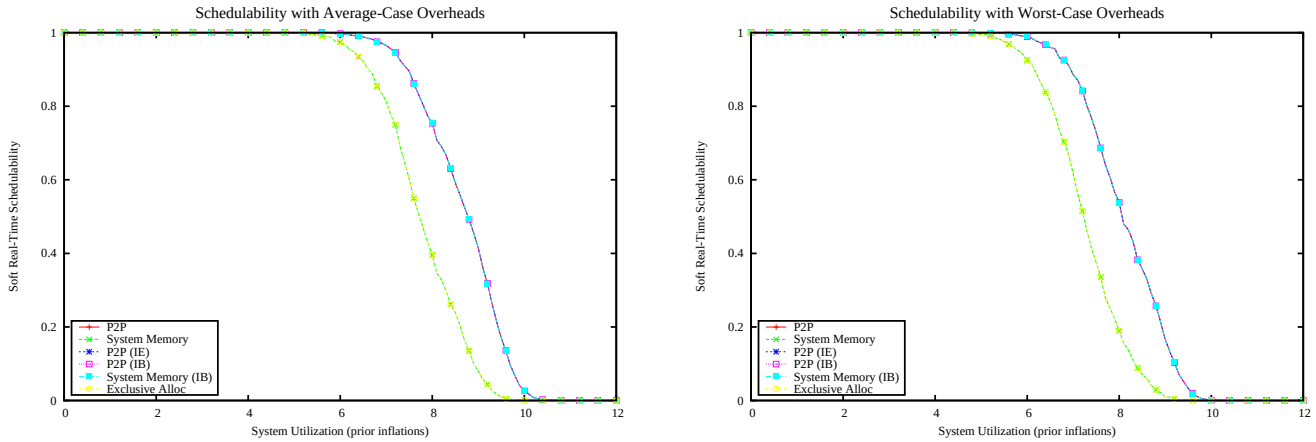

Figure 1484: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

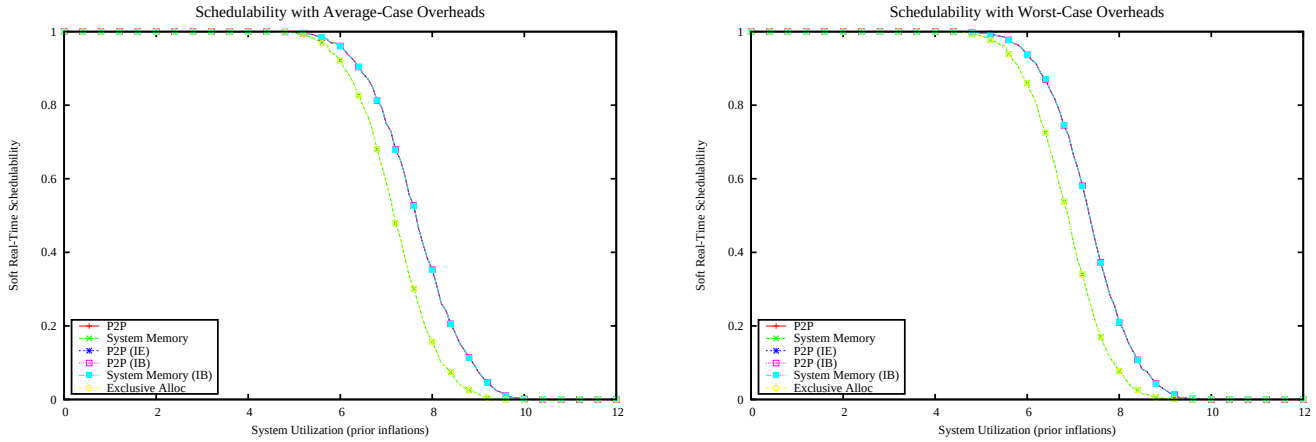

Figure 1485: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

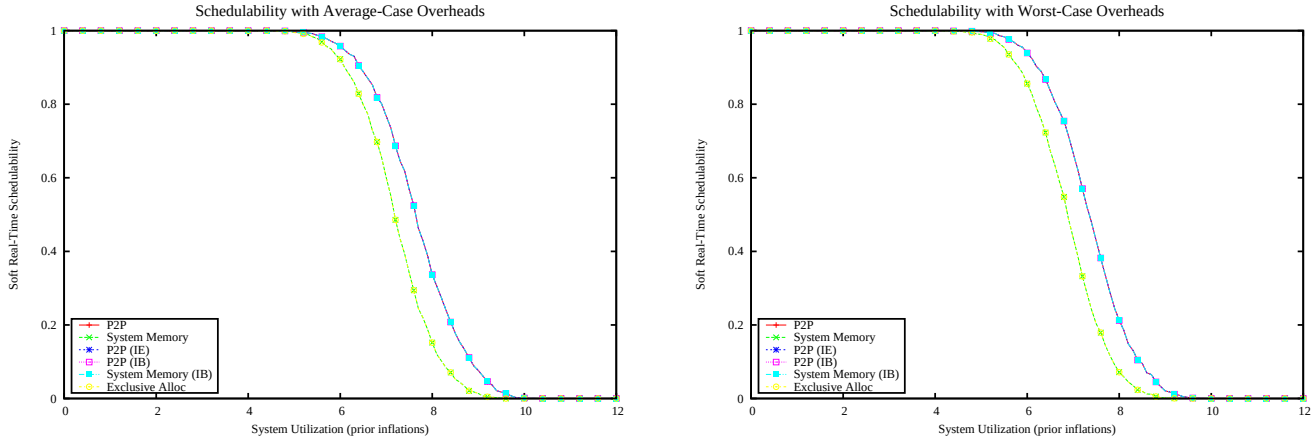

Figure 1486: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

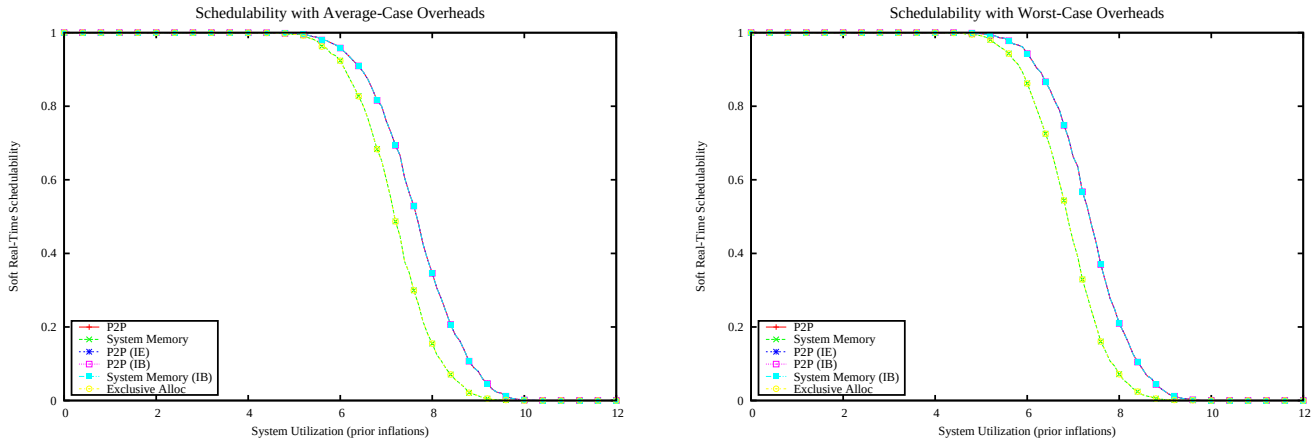

Figure 1487: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

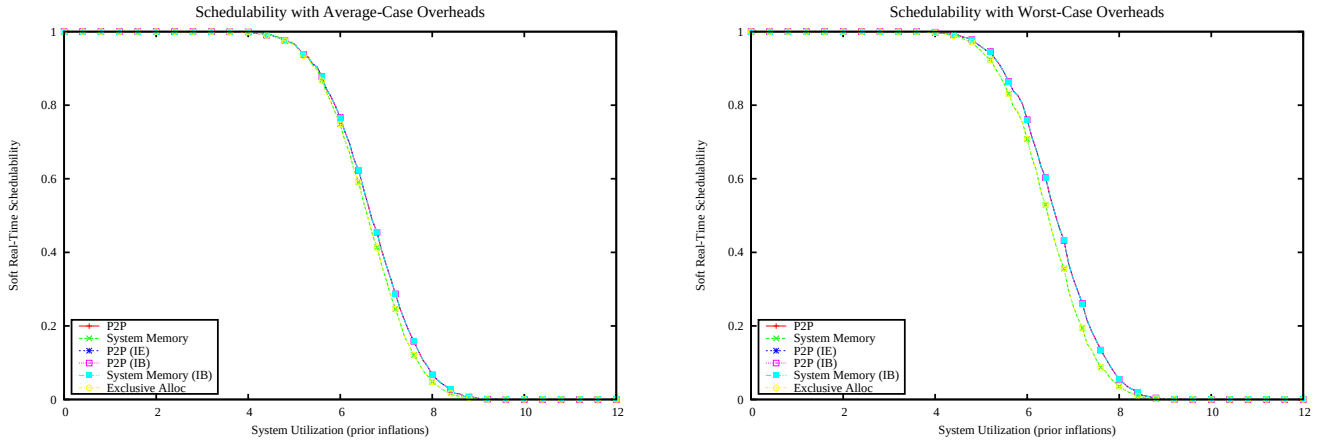

Figure 1488: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

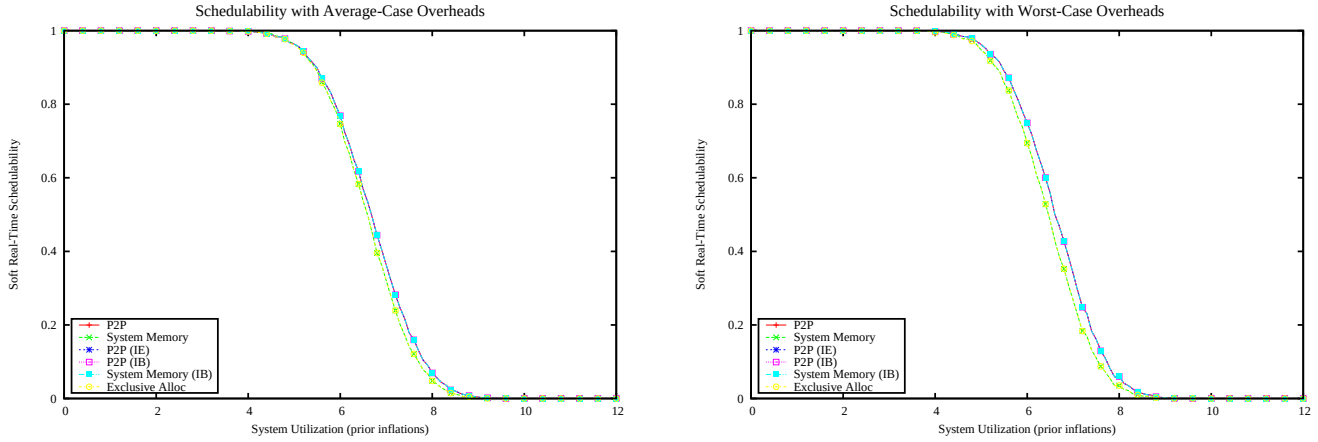

Figure 1489: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

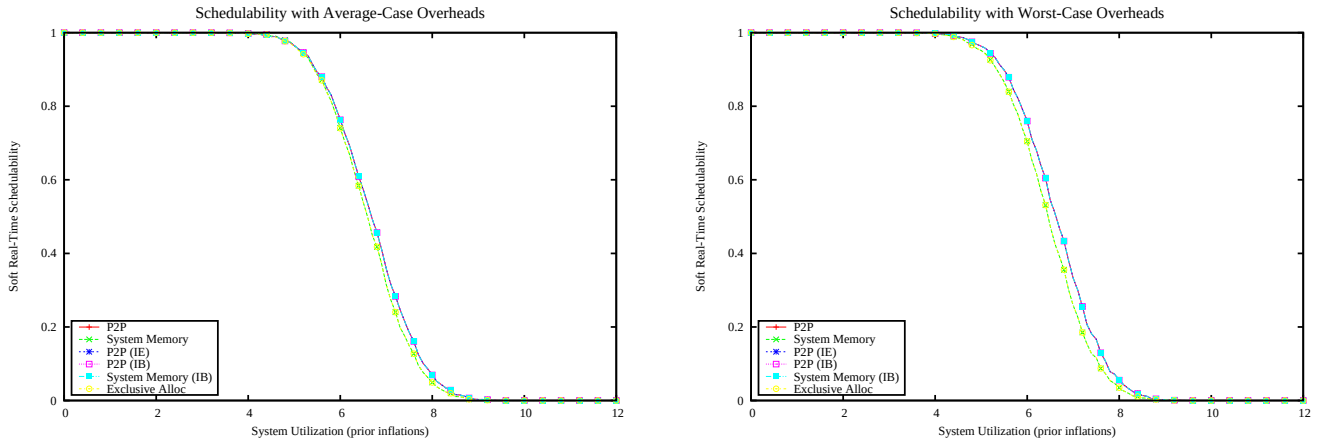

Figure 1490: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

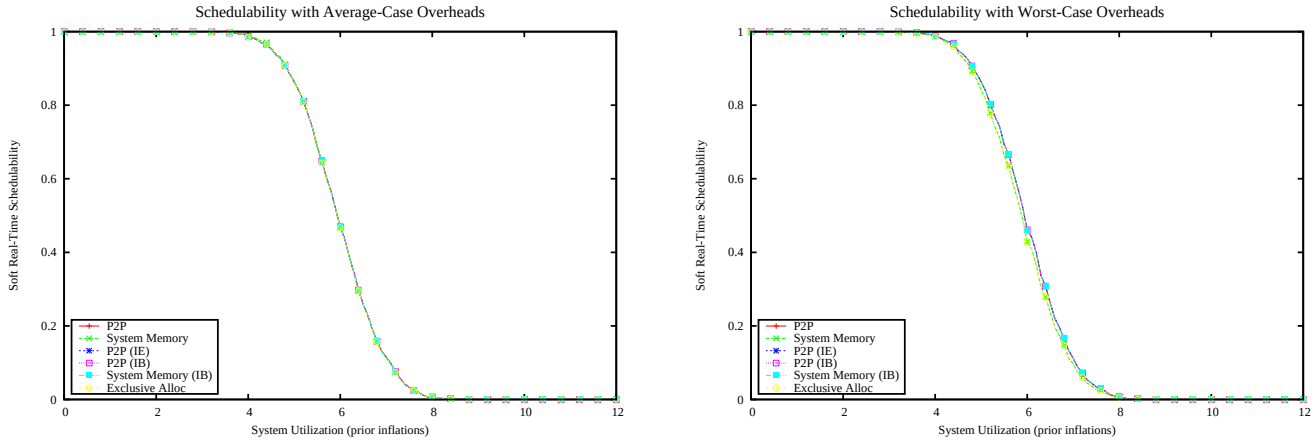

Figure 1491: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

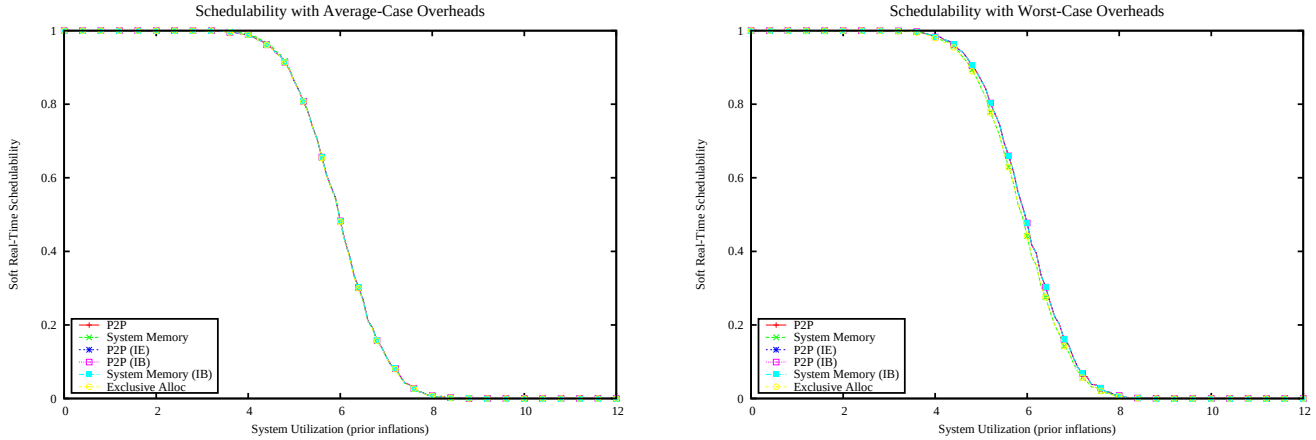

Figure 1492: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

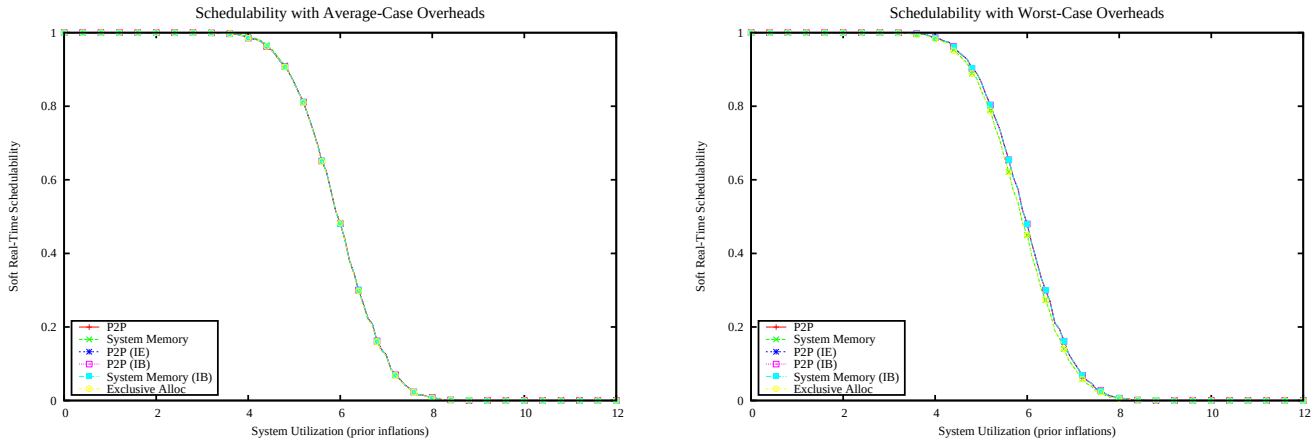

Figure 1493: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

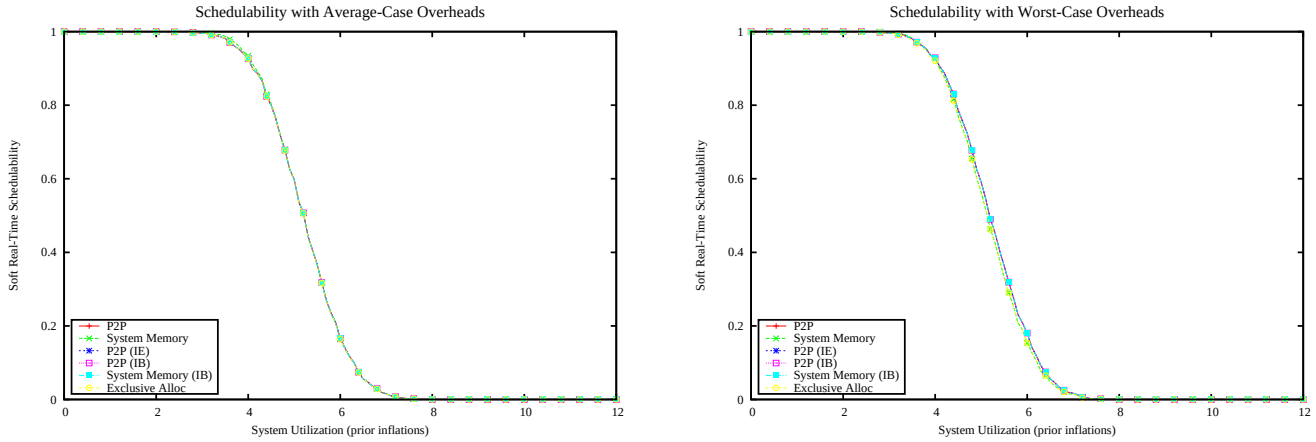

Figure 1494: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

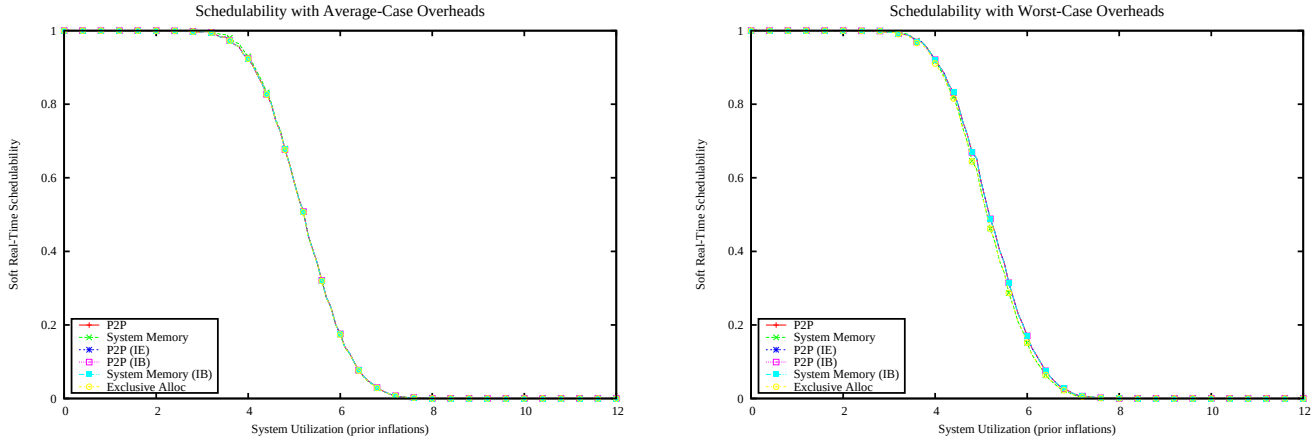

Figure 1495: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

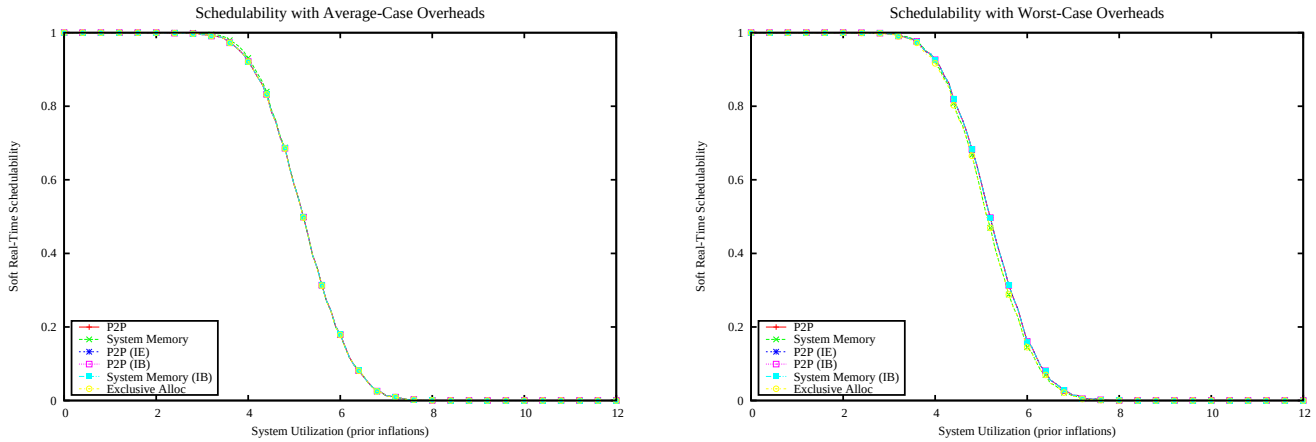

Figure 1496: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

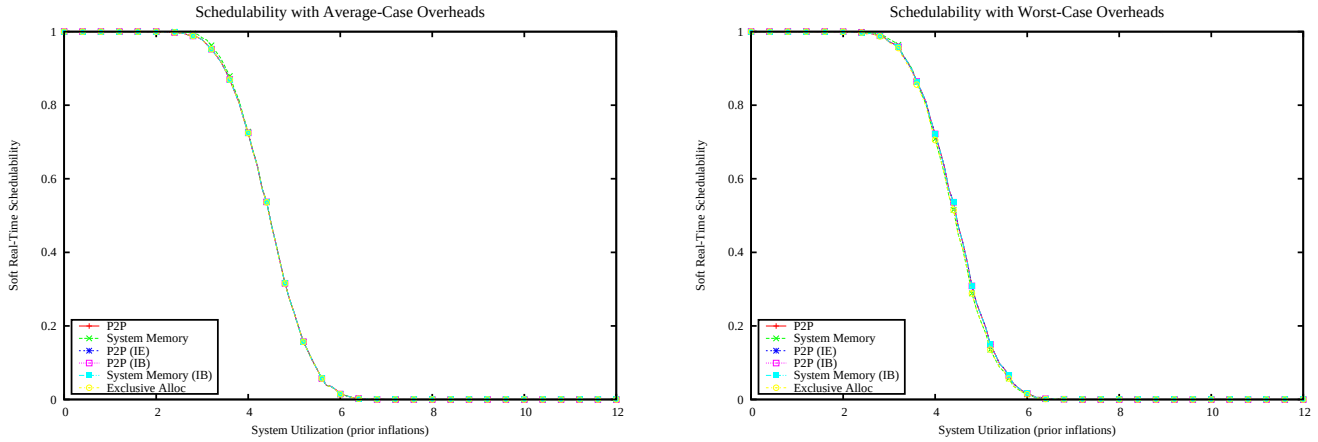

Figure 1497: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

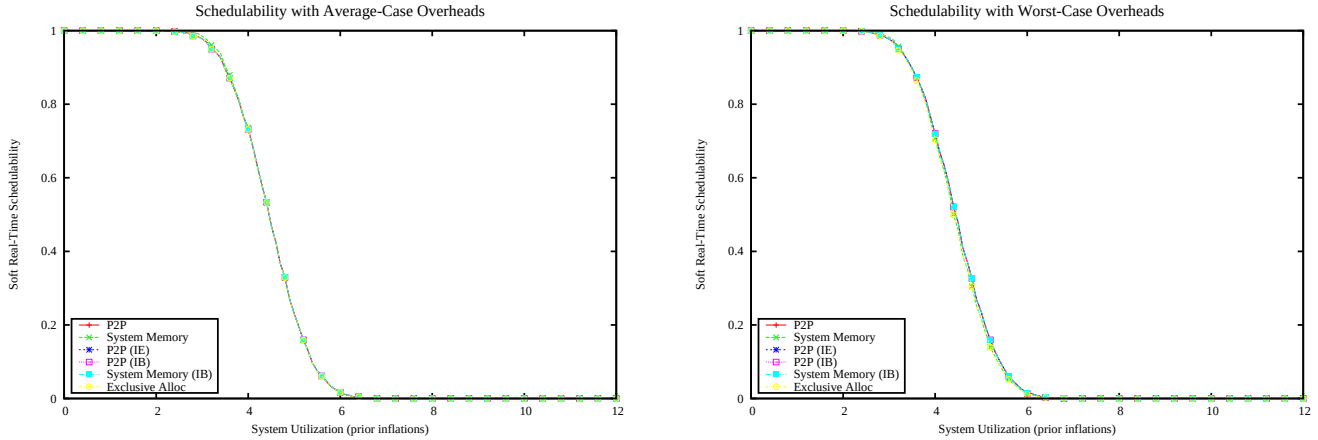

Figure 1498: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

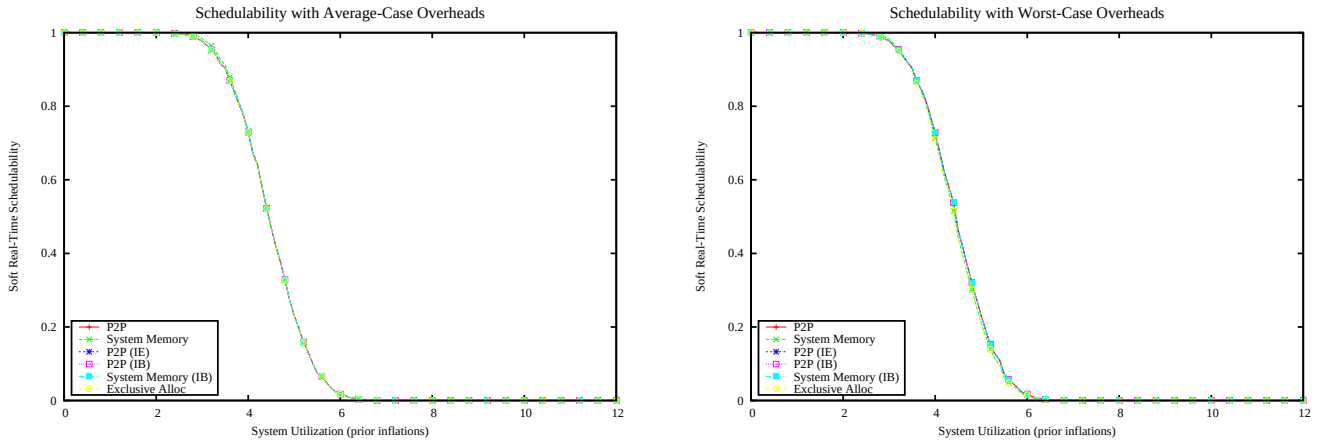

Figure 1499: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

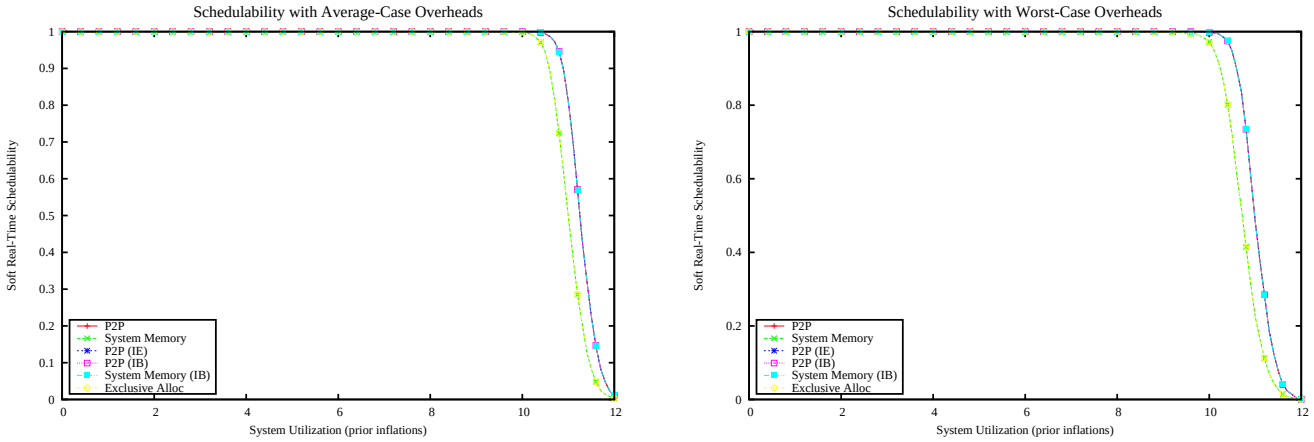

Figure 1500: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

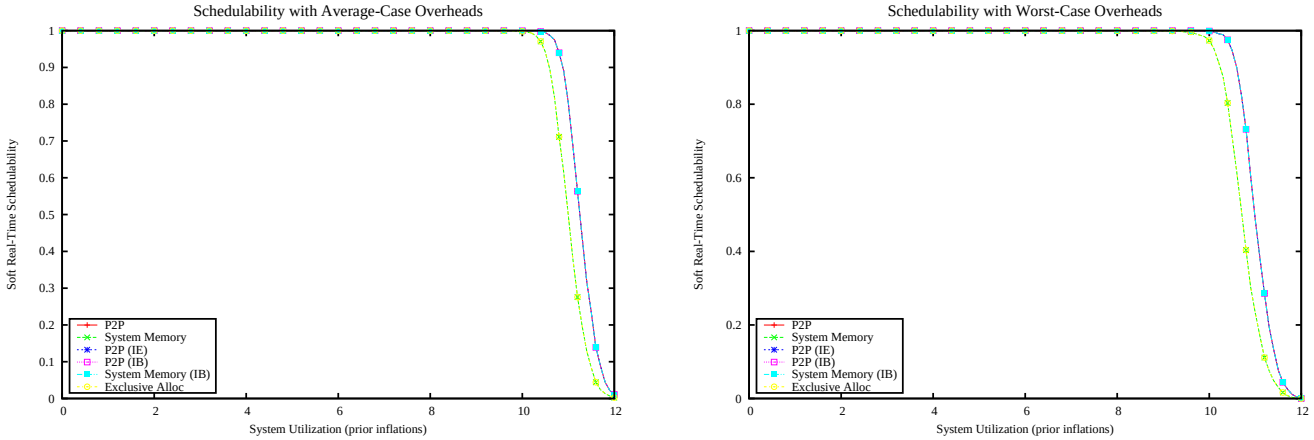

Figure 1501: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

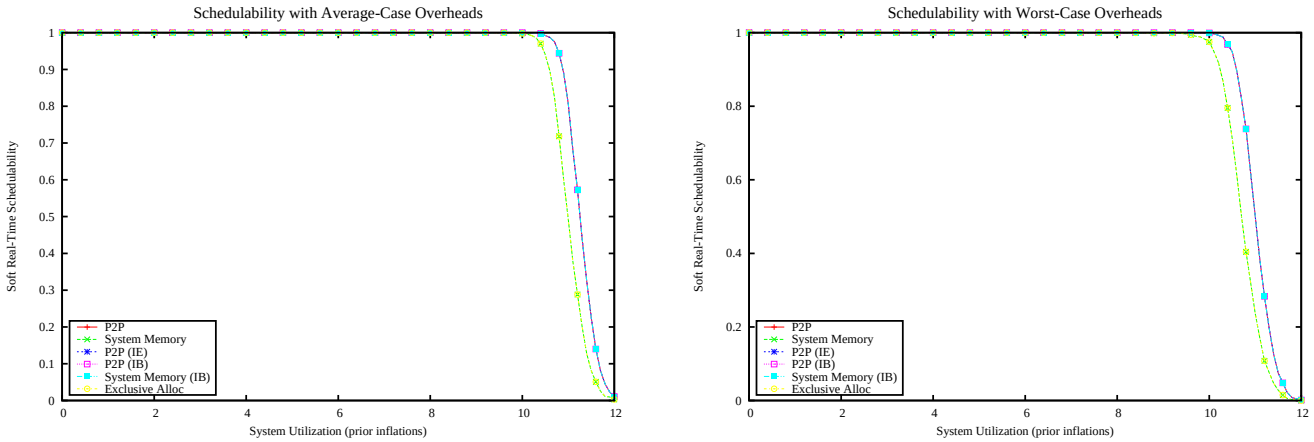

Figure 1502: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

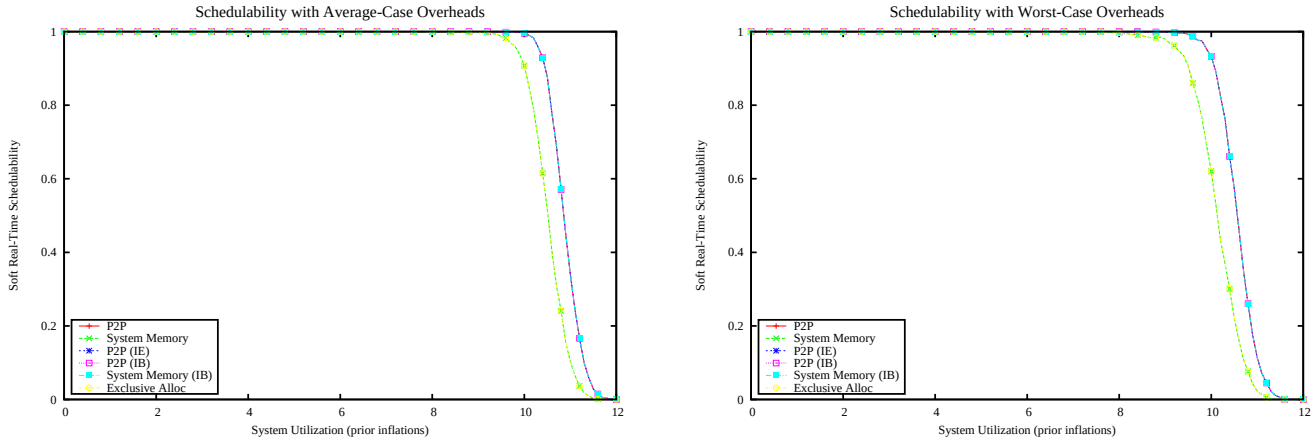

Figure 1503: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

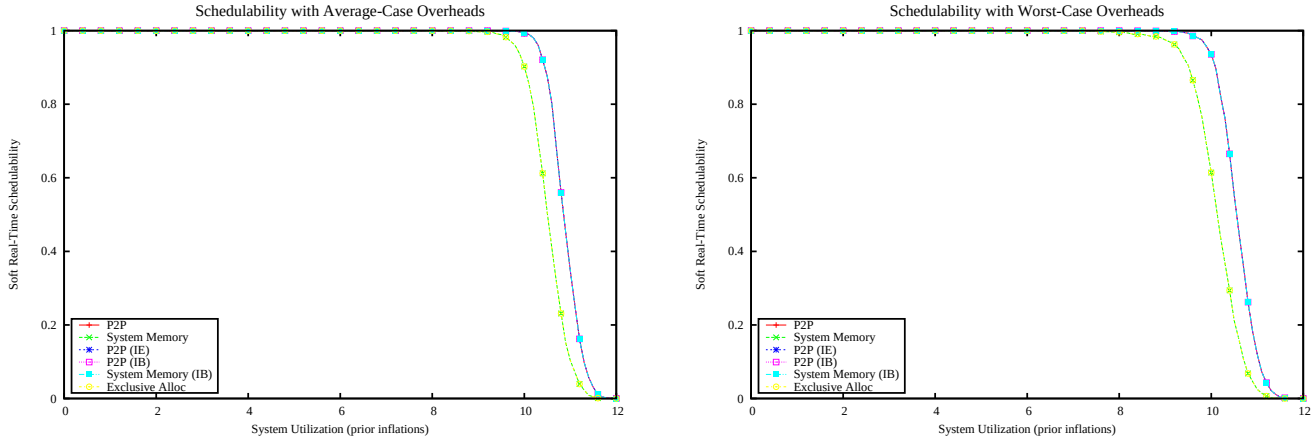

Figure 1504: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

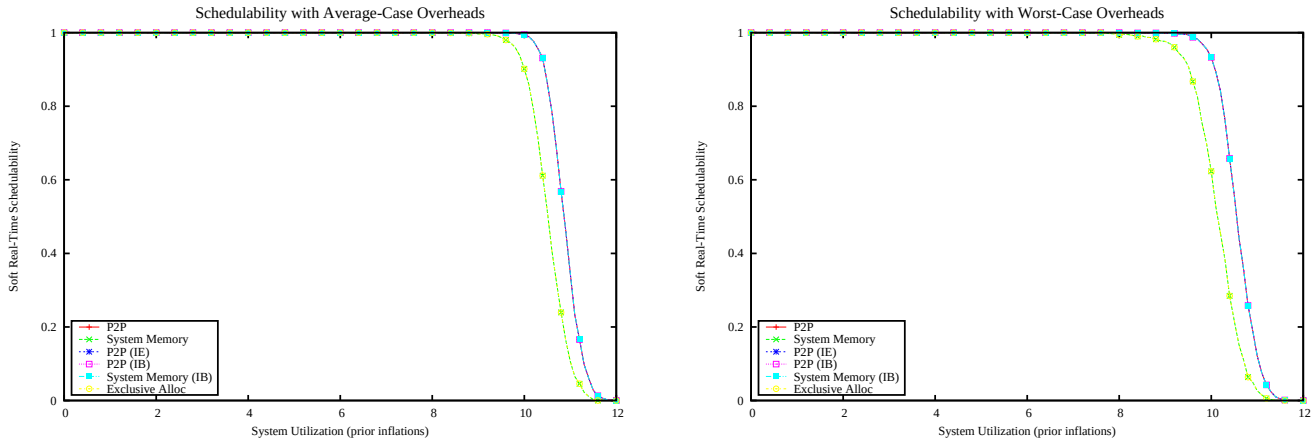

Figure 1505: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

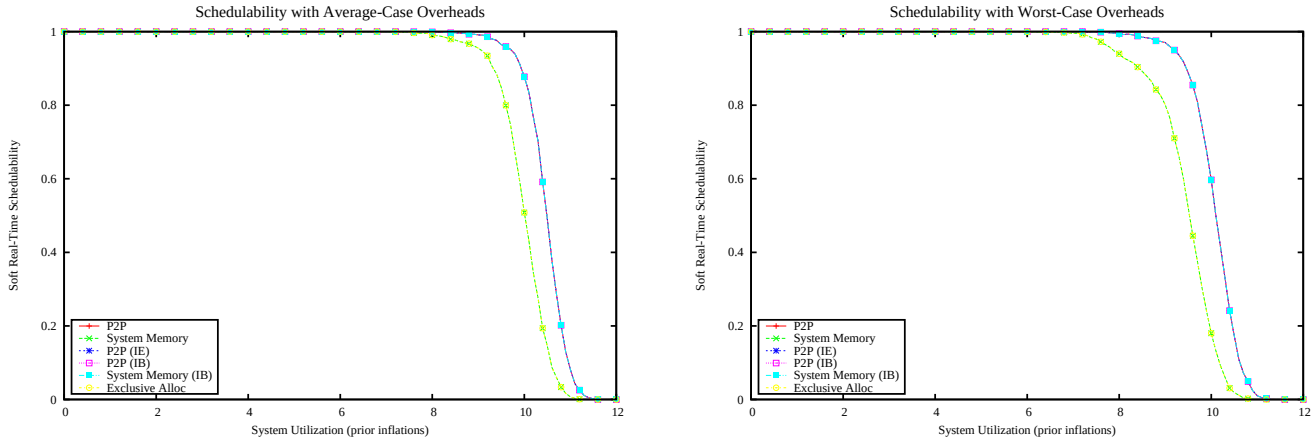

Figure 1506: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

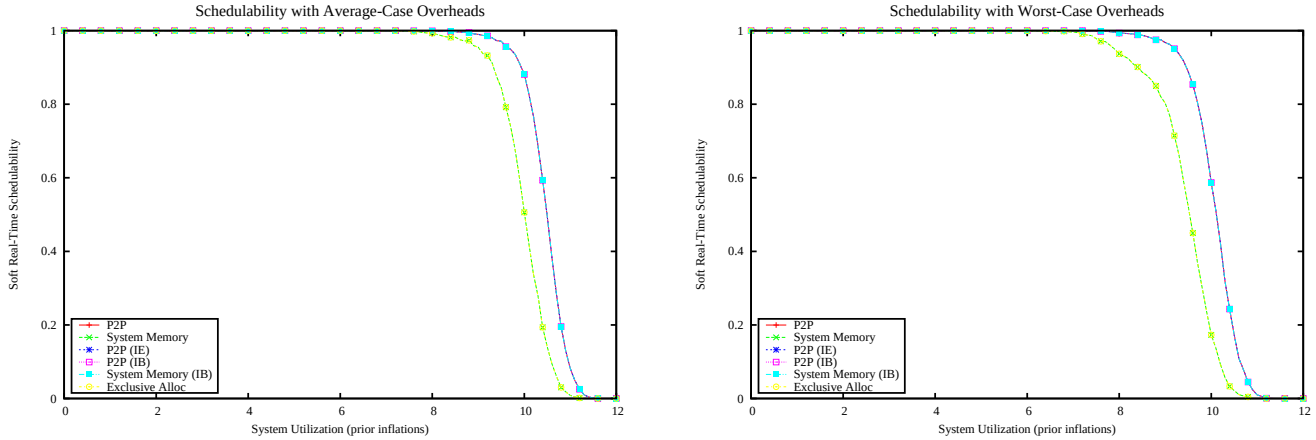

Figure 1507: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

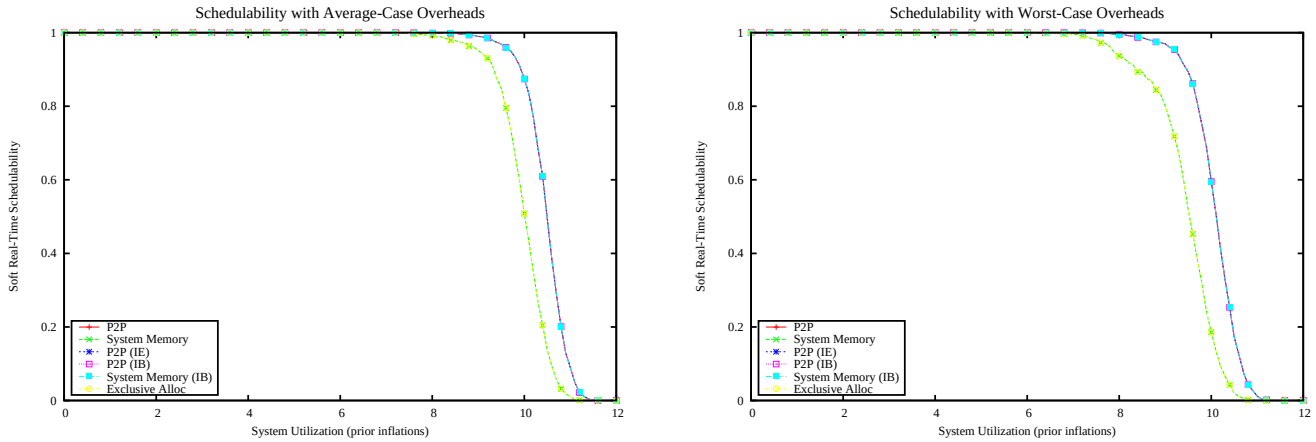

Figure 1508: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

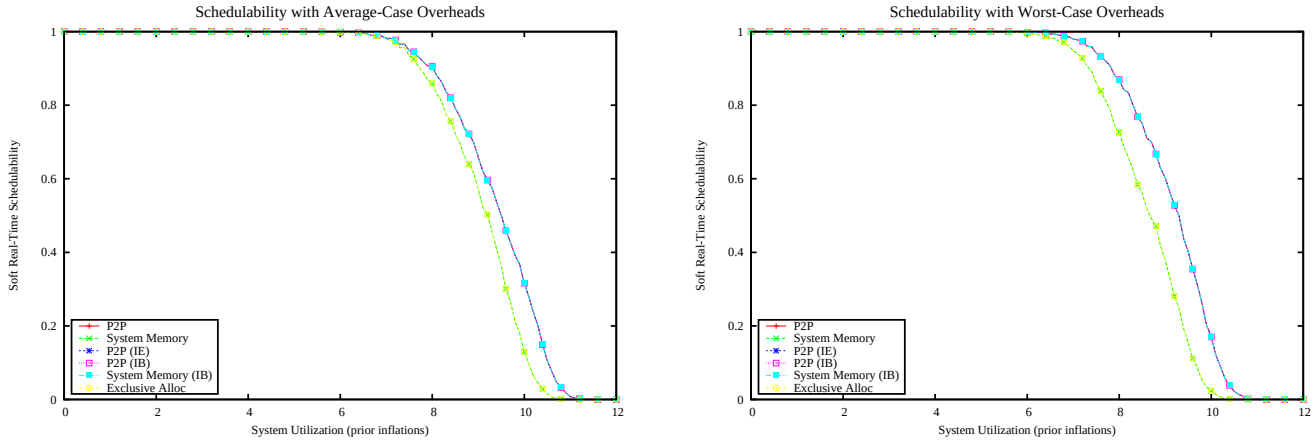

Figure 1509: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

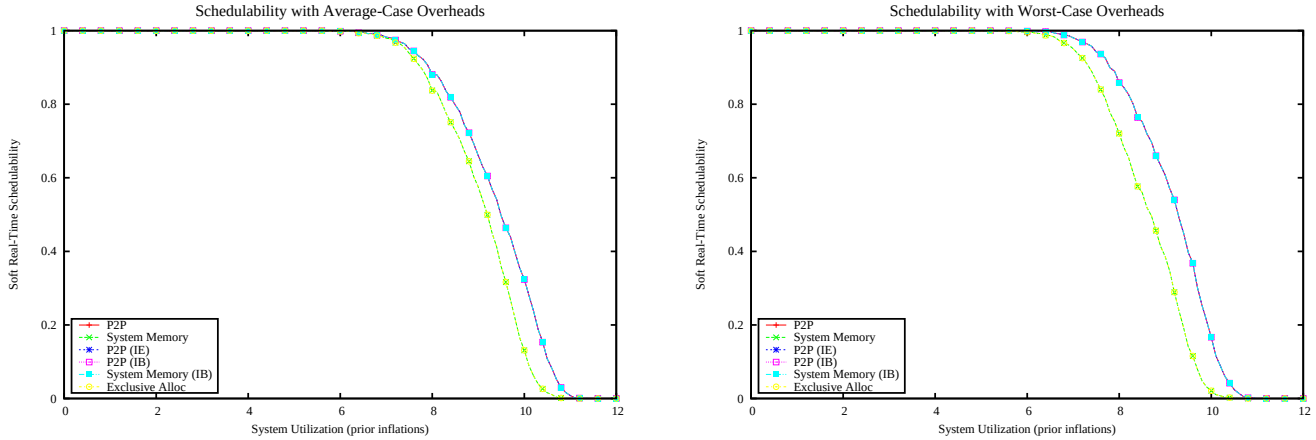

Figure 1510: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

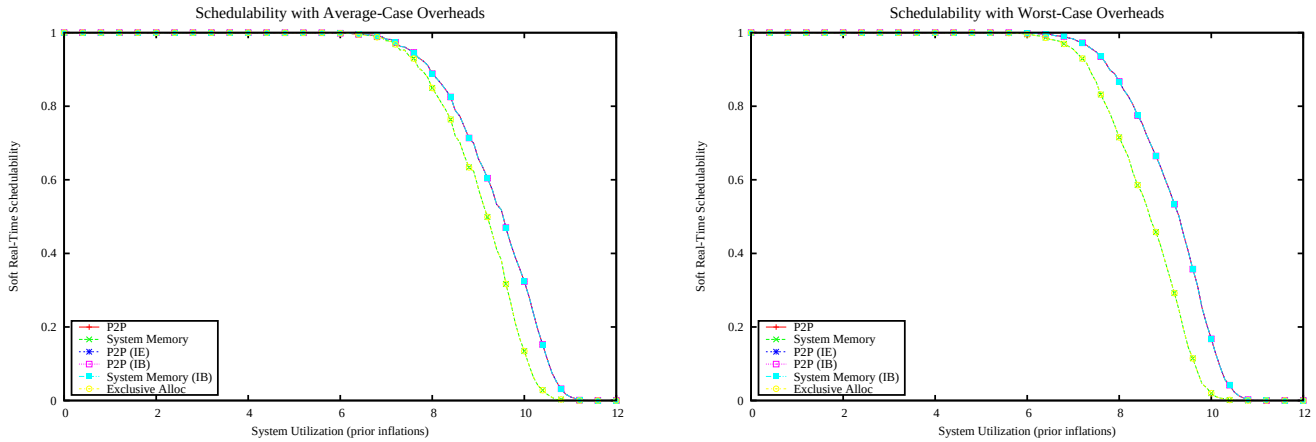

Figure 1511: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

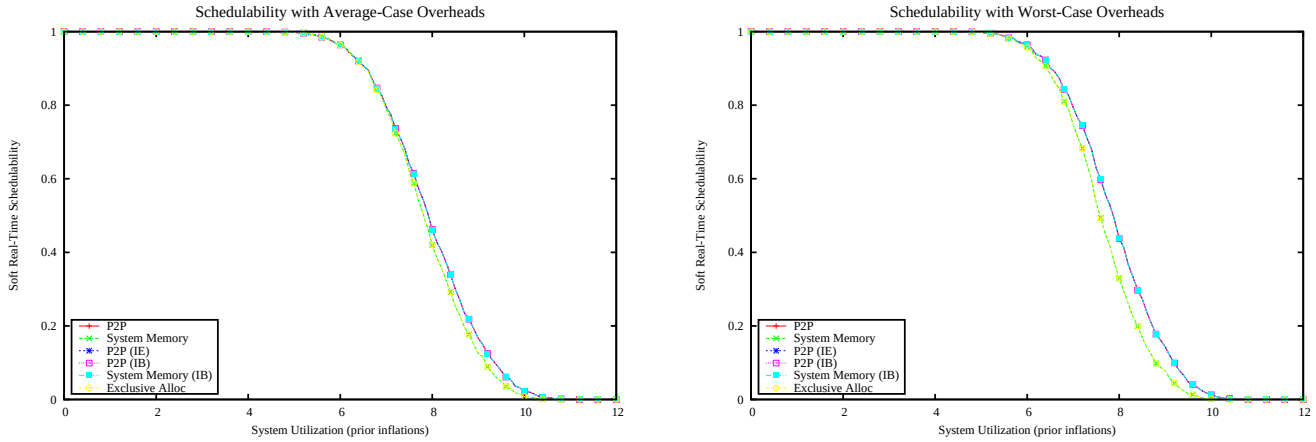

Figure 1512: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

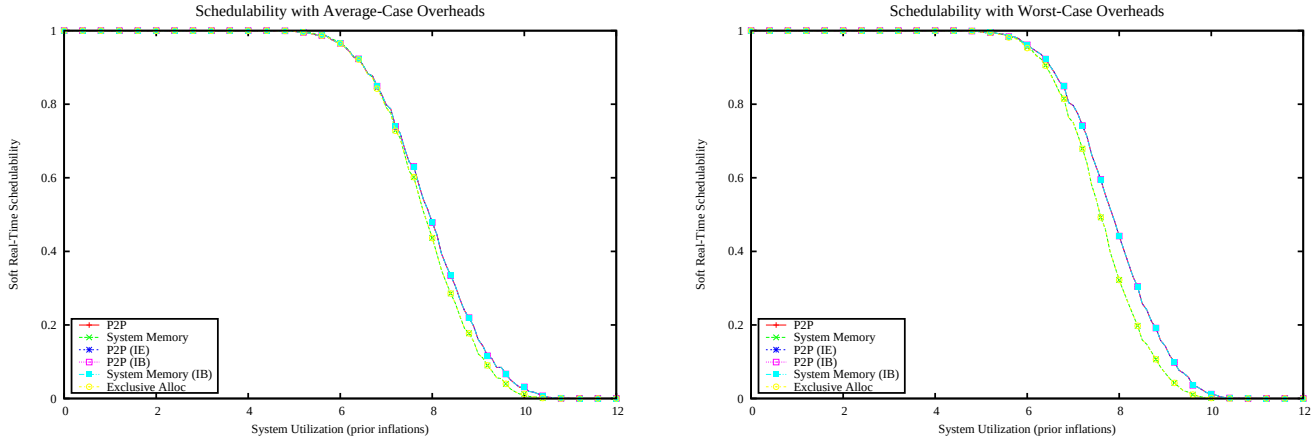

Figure 1513: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

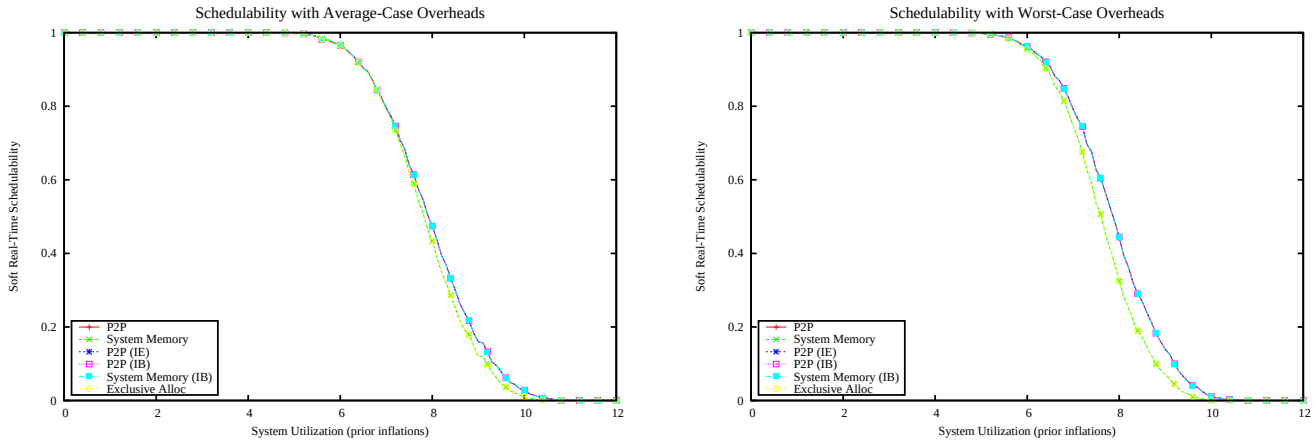

Figure 1514: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

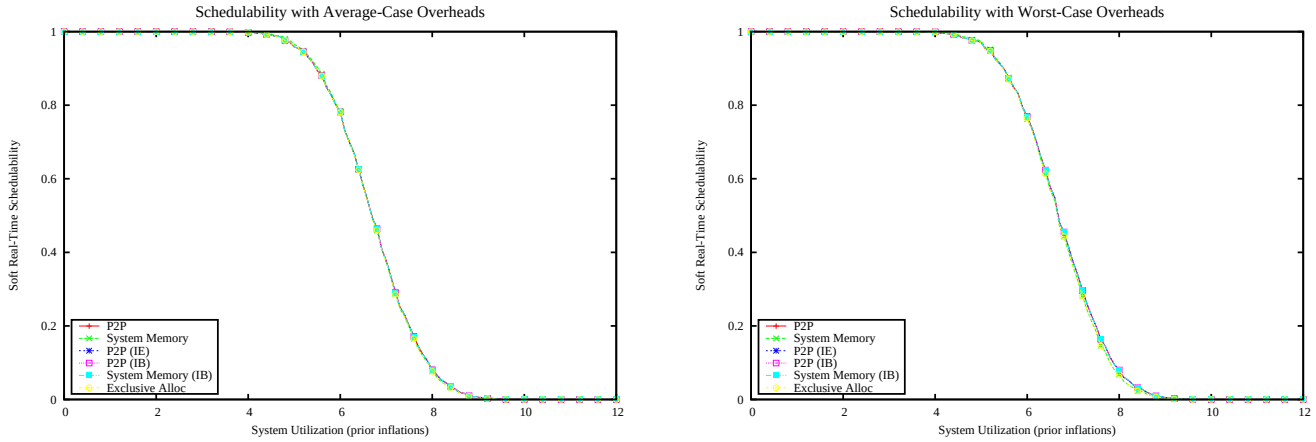

Figure 1515: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

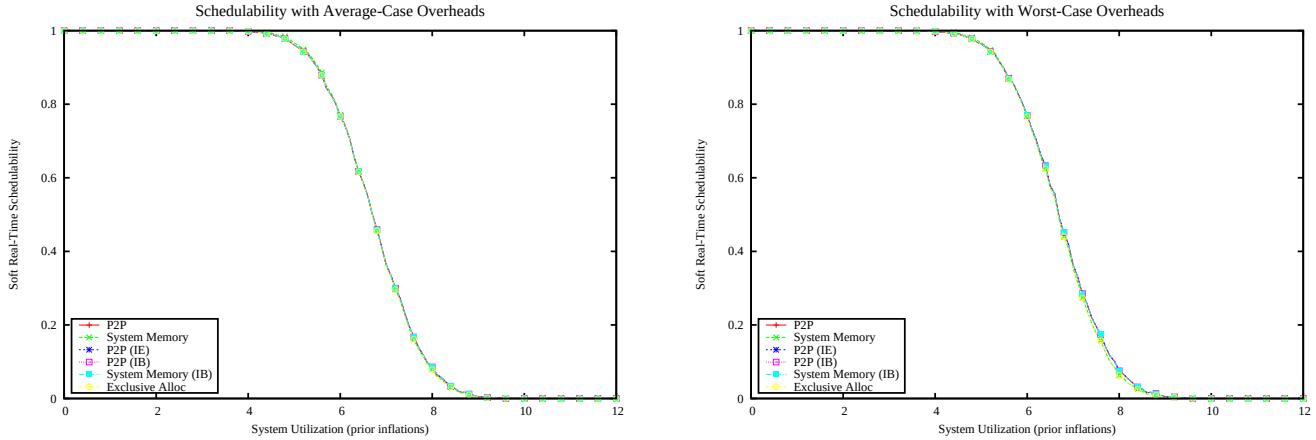

Figure 1516: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

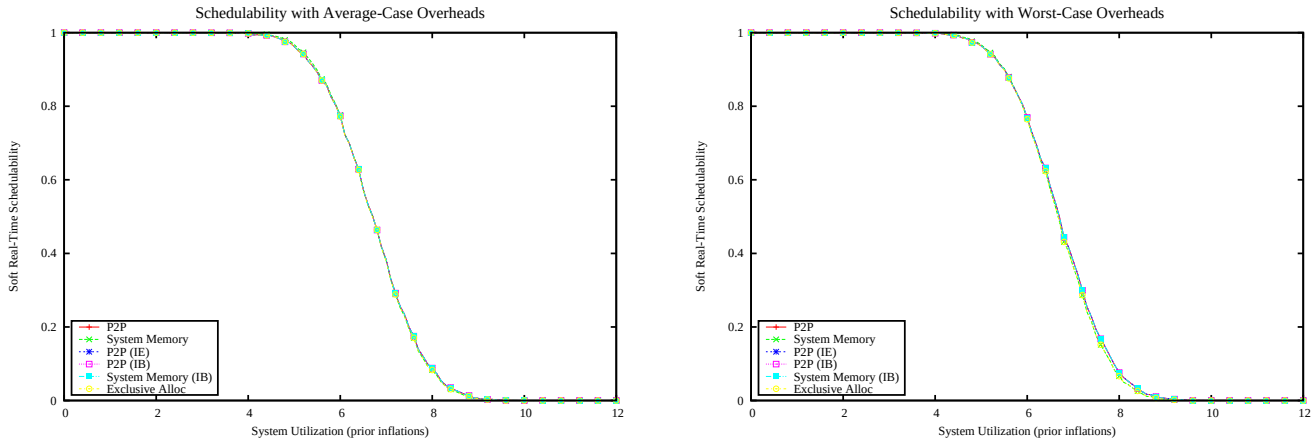

Figure 1517: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

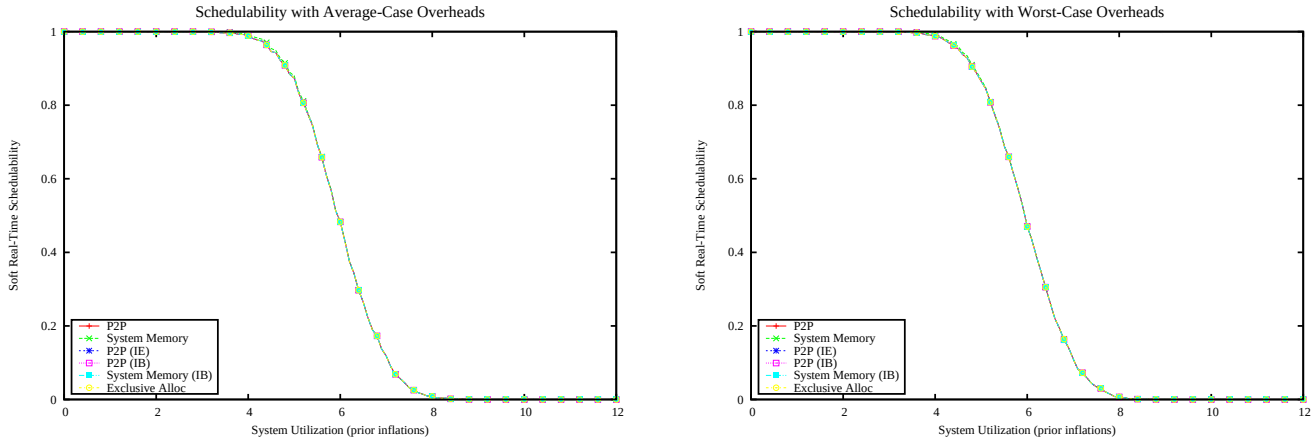

Figure 1518: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

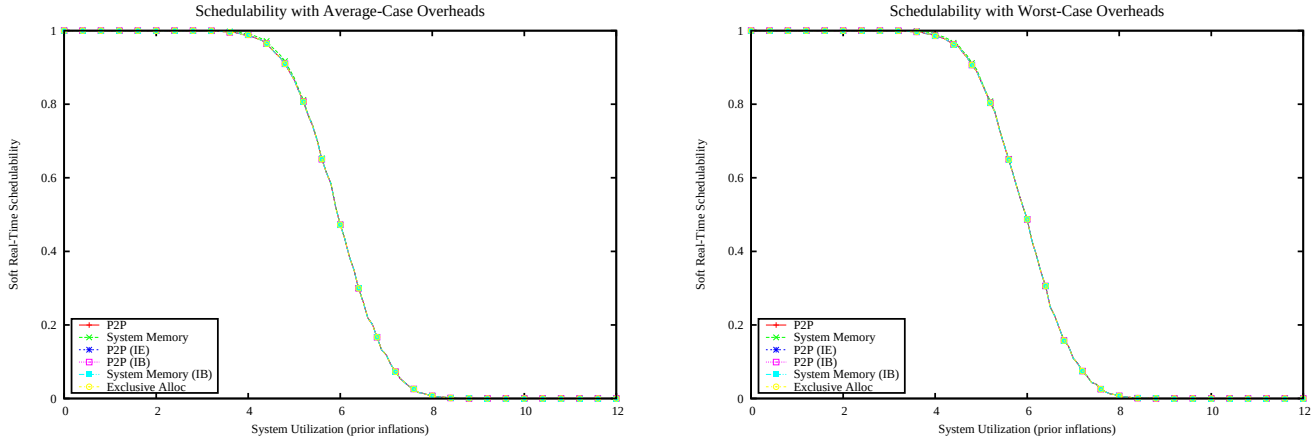

Figure 1519: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

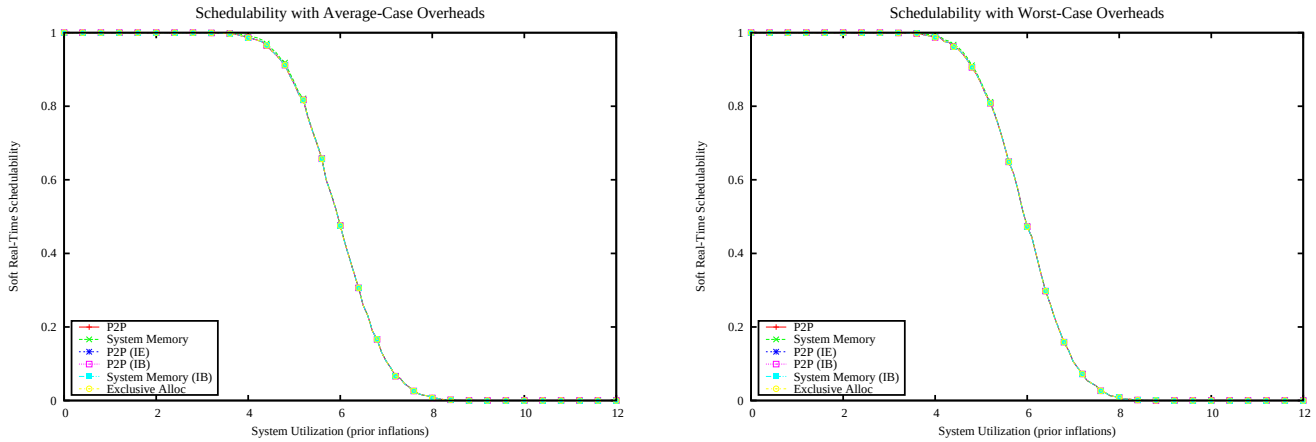

Figure 1520: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

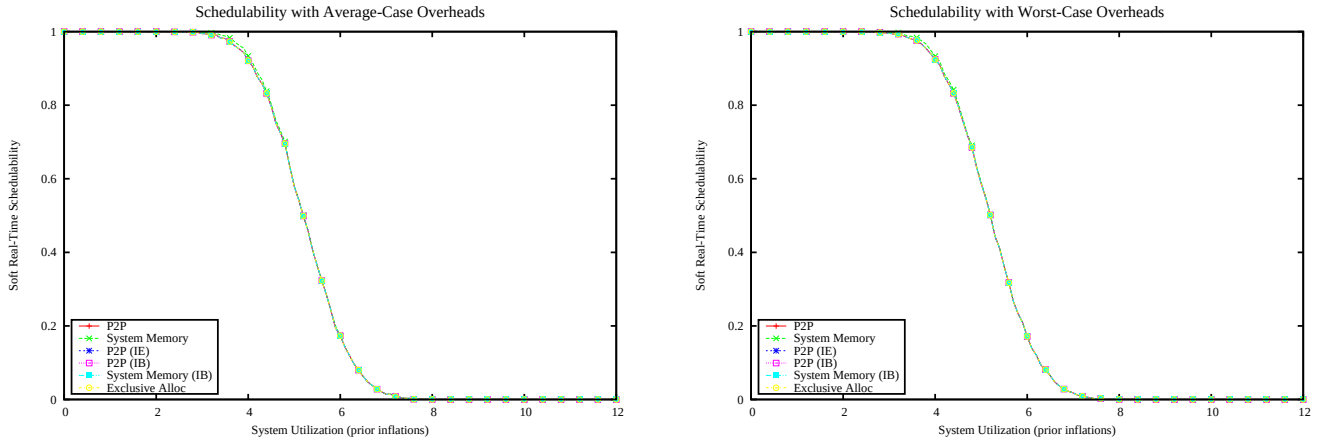

Figure 1521: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

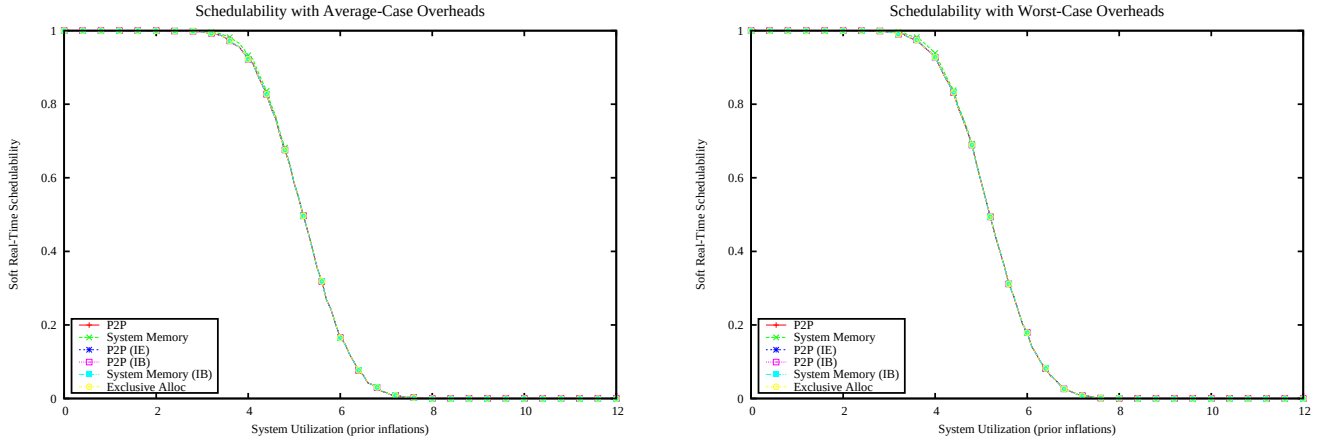

Figure 1522: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

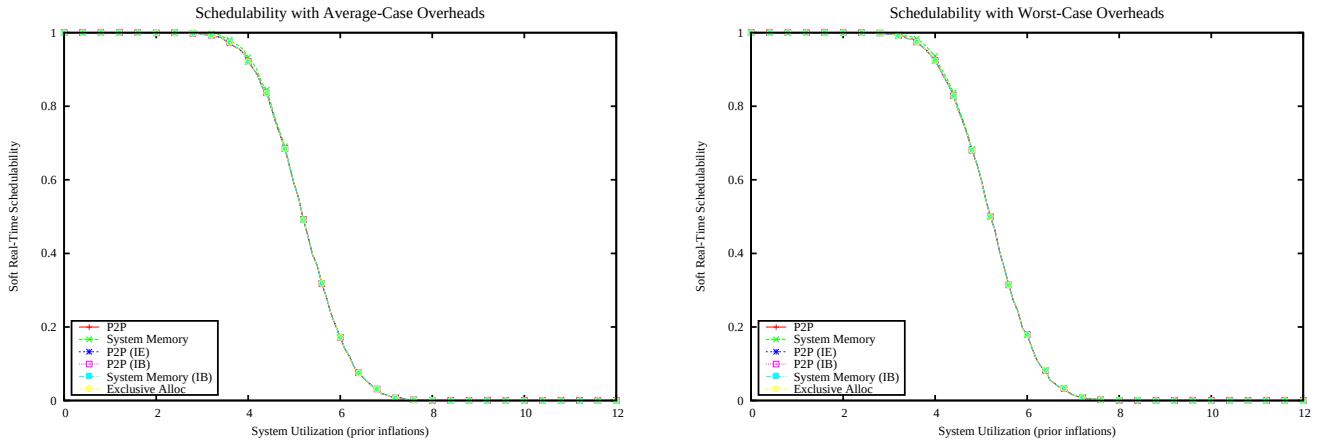

Figure 1523: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

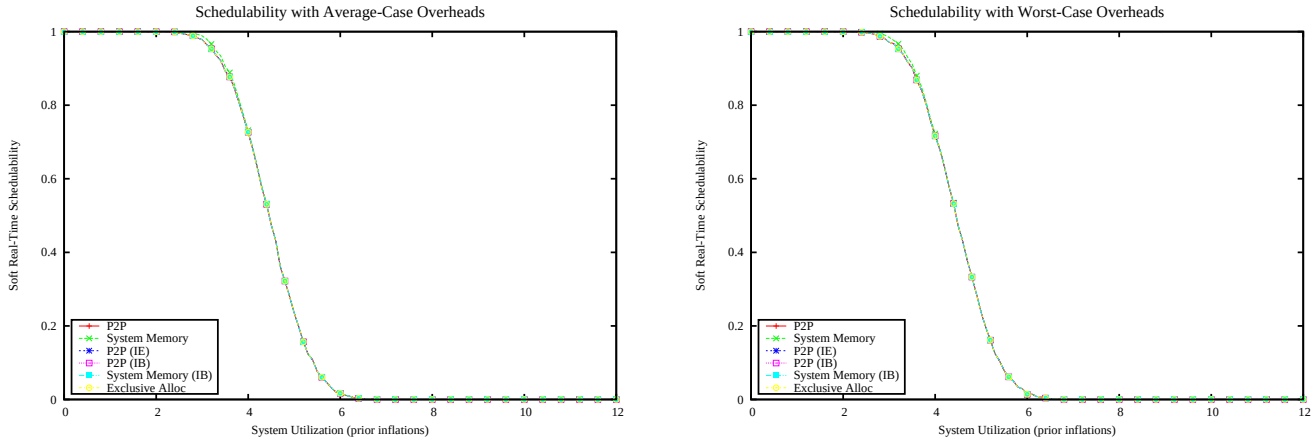

Figure 1524: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

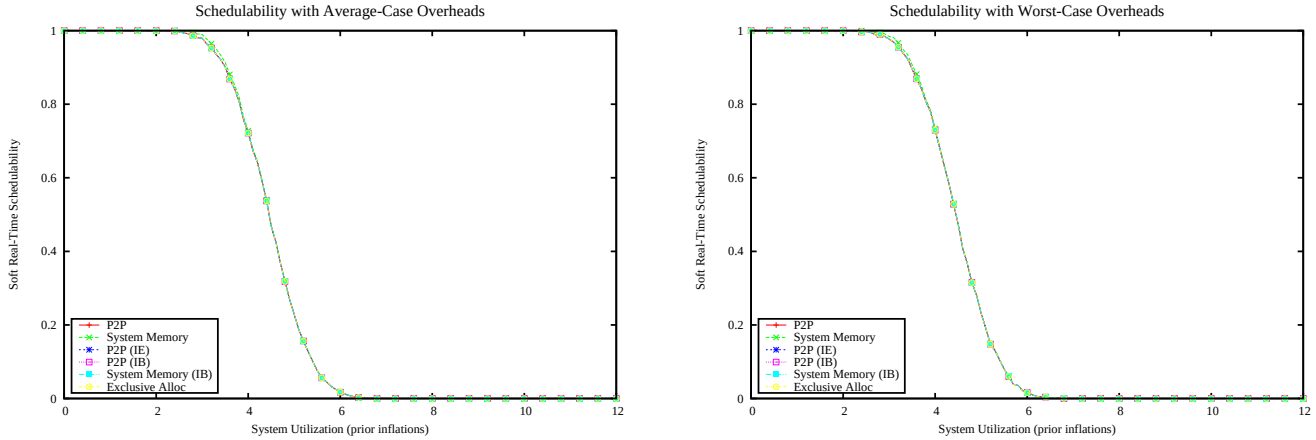

Figure 1525: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

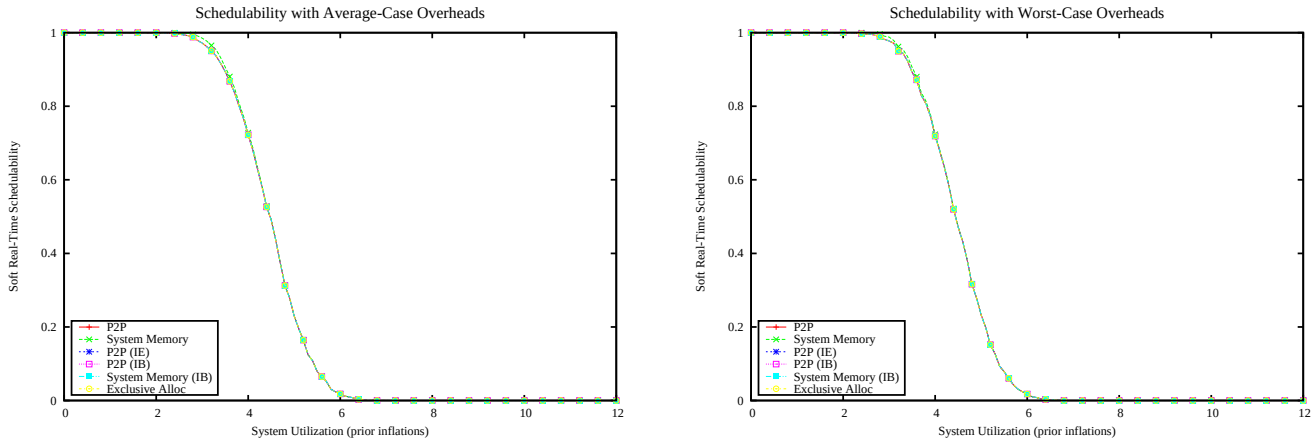

Figure 1526: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

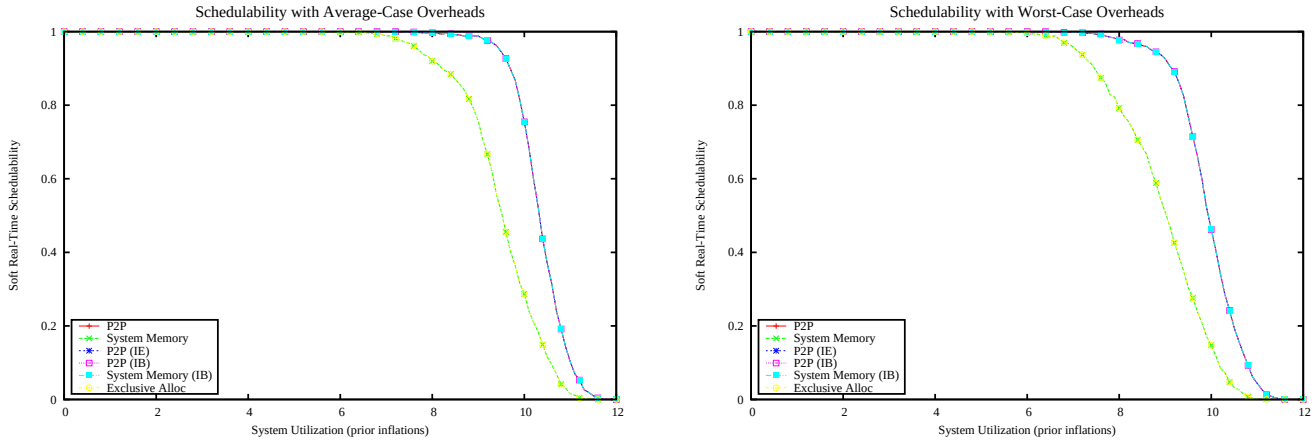

Figure 1527: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

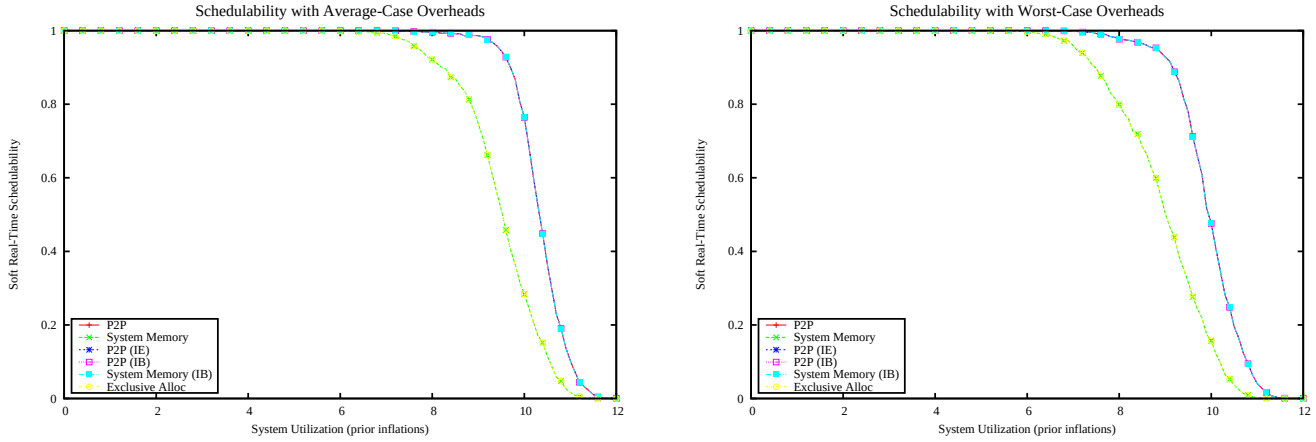

Figure 1528: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

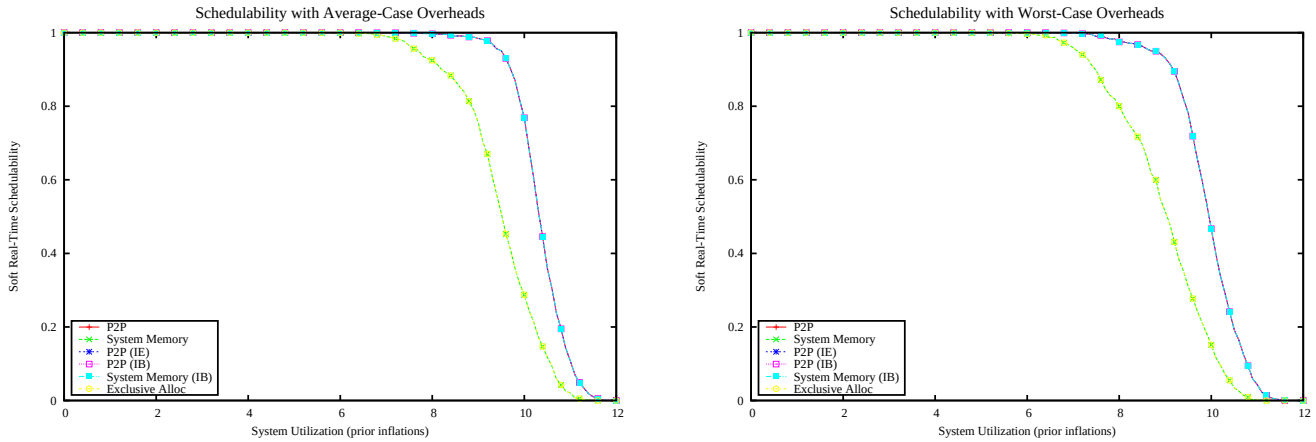

Figure 1529: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

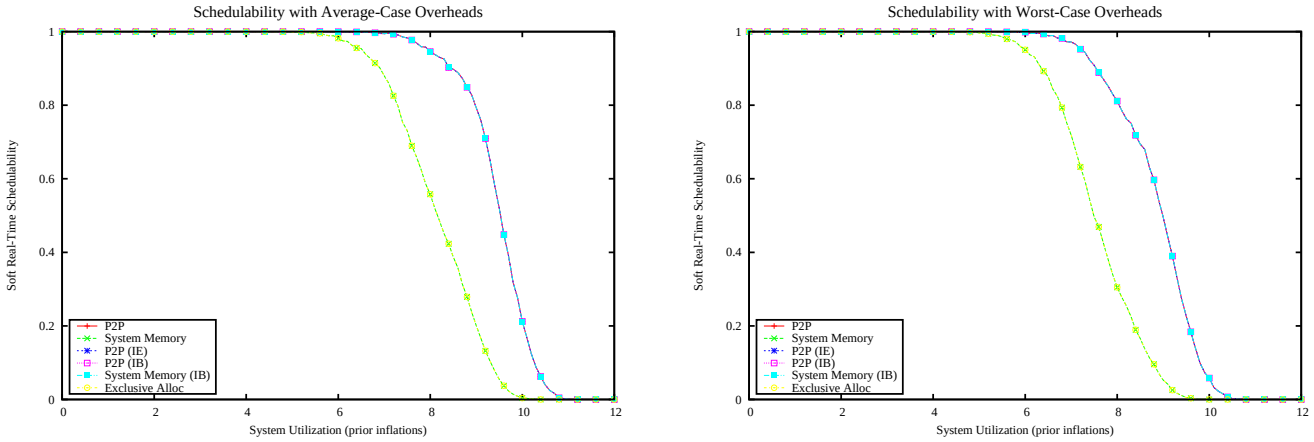

Figure 1530: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

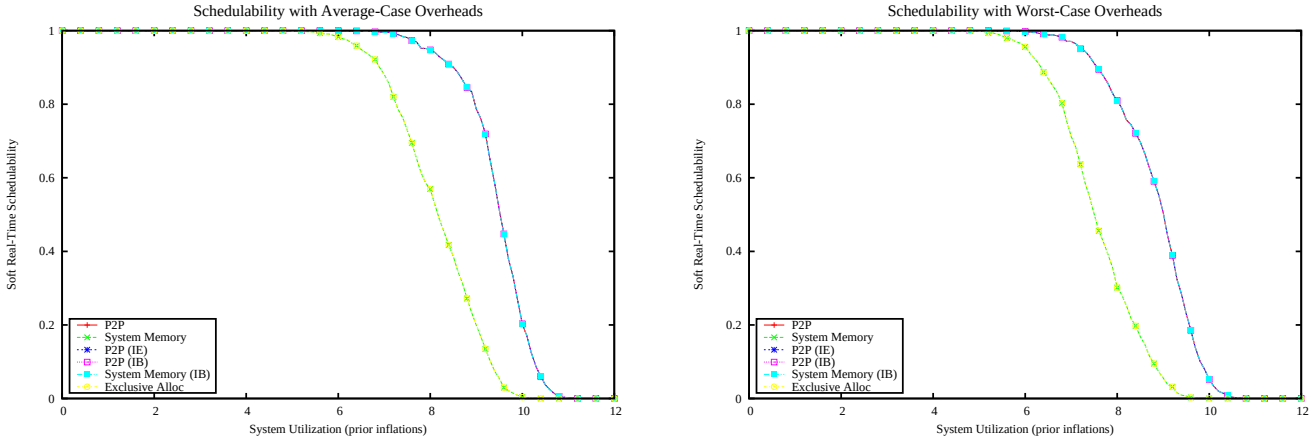

Figure 1531: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

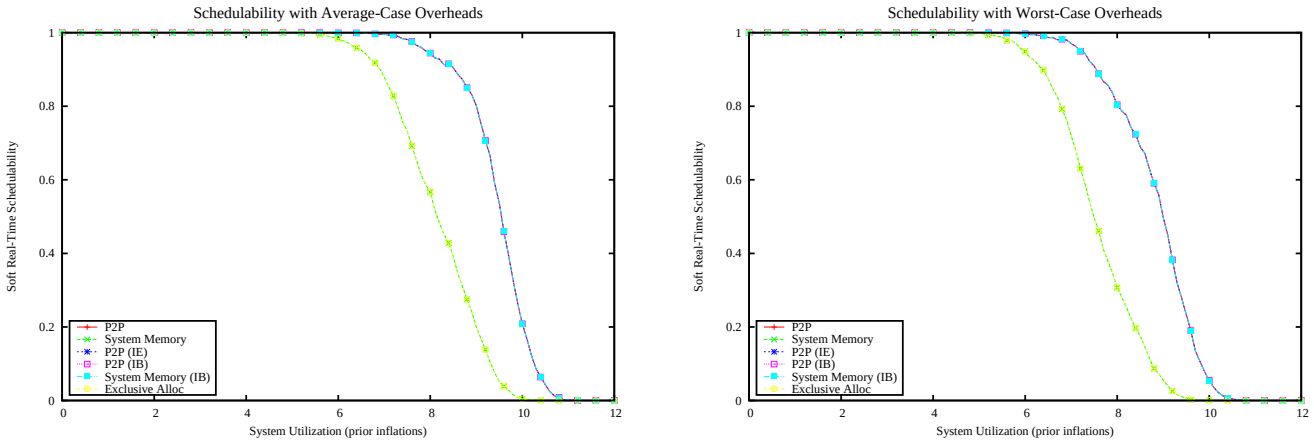

Figure 1532: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

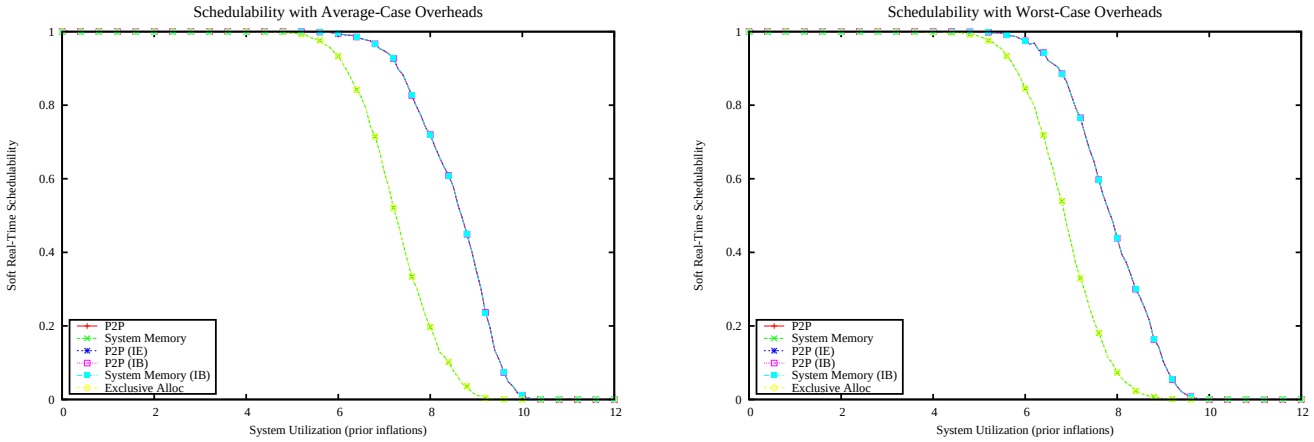

Figure 1533: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

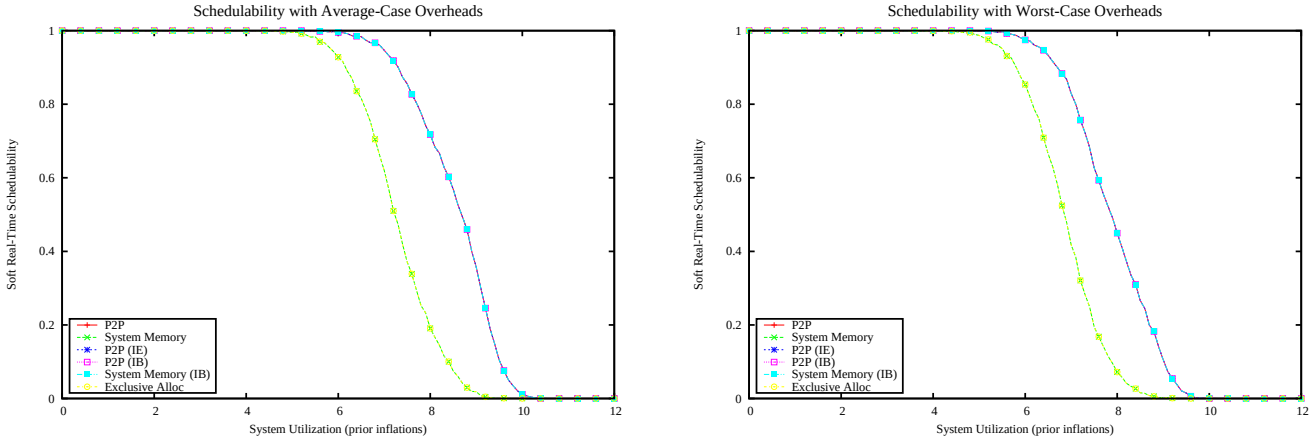

Figure 1534: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

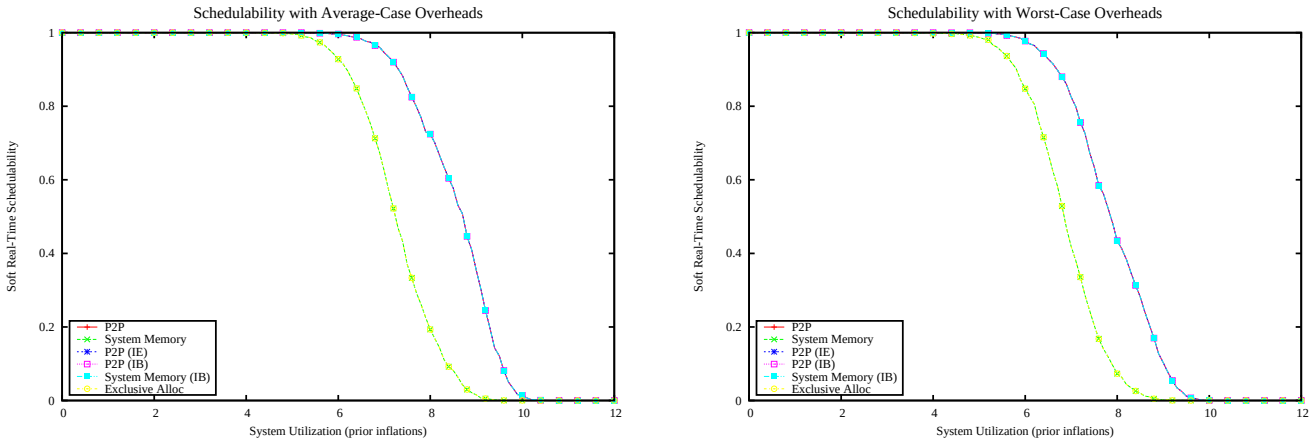

Figure 1535: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

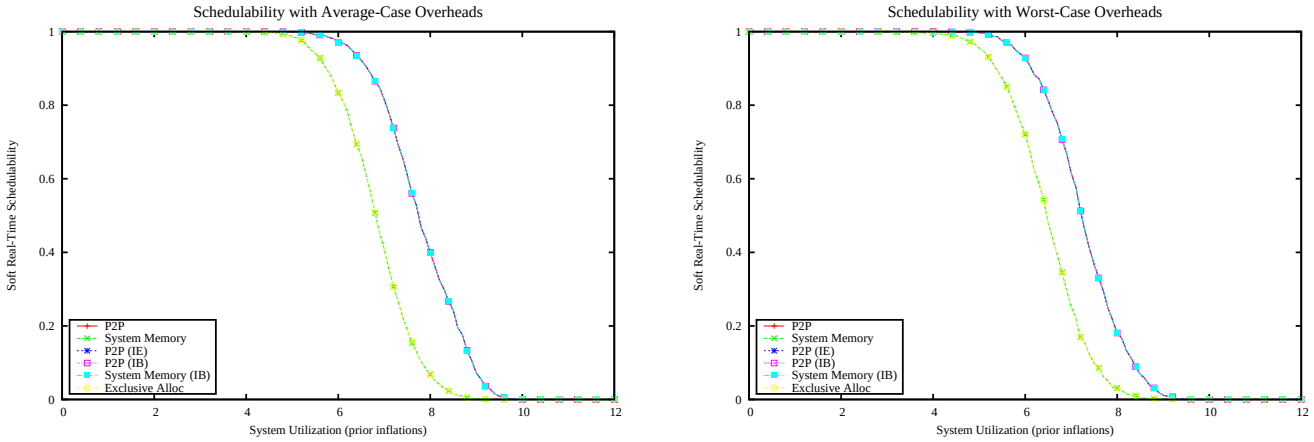

Figure 1536: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

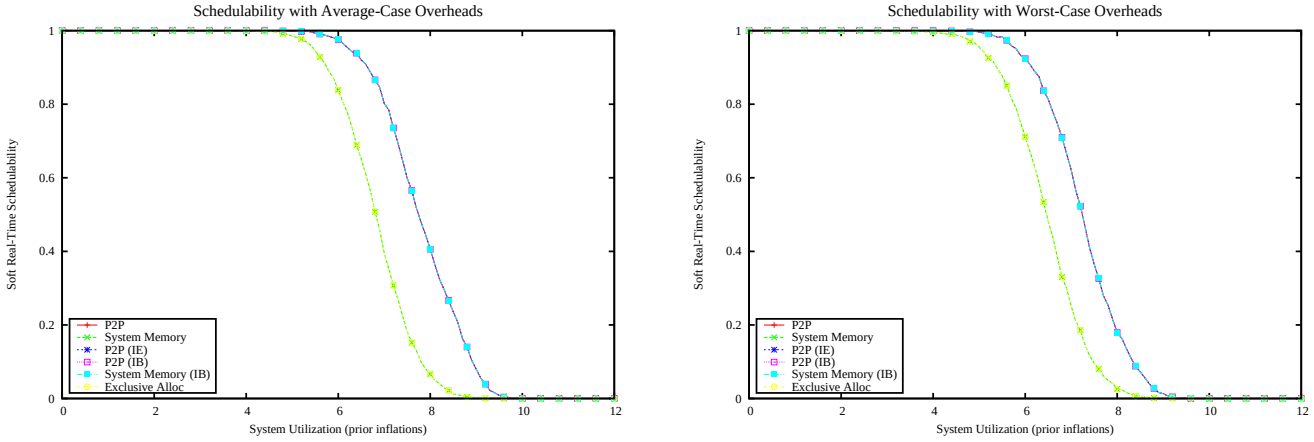

Figure 1537: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

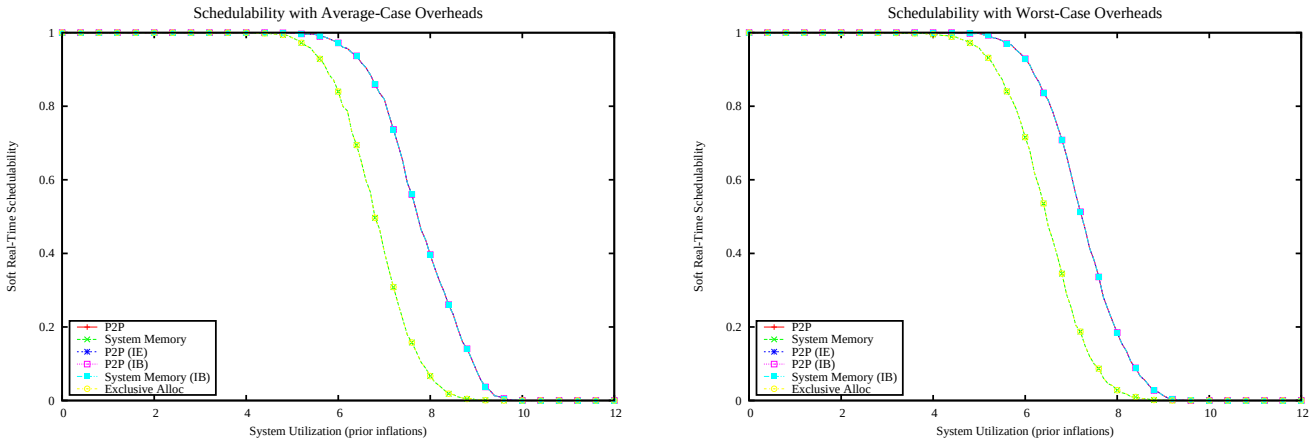

Figure 1538: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

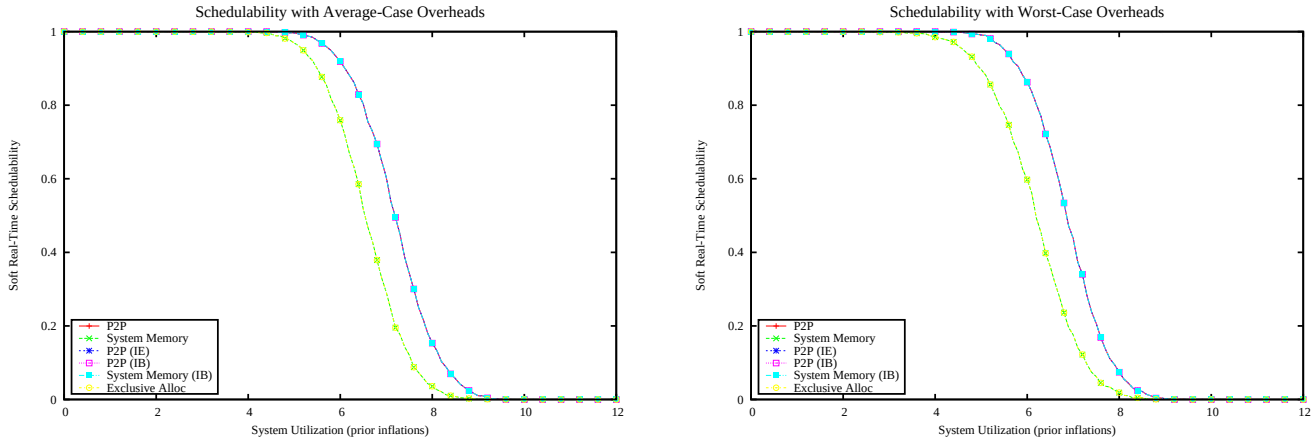

Figure 1539: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

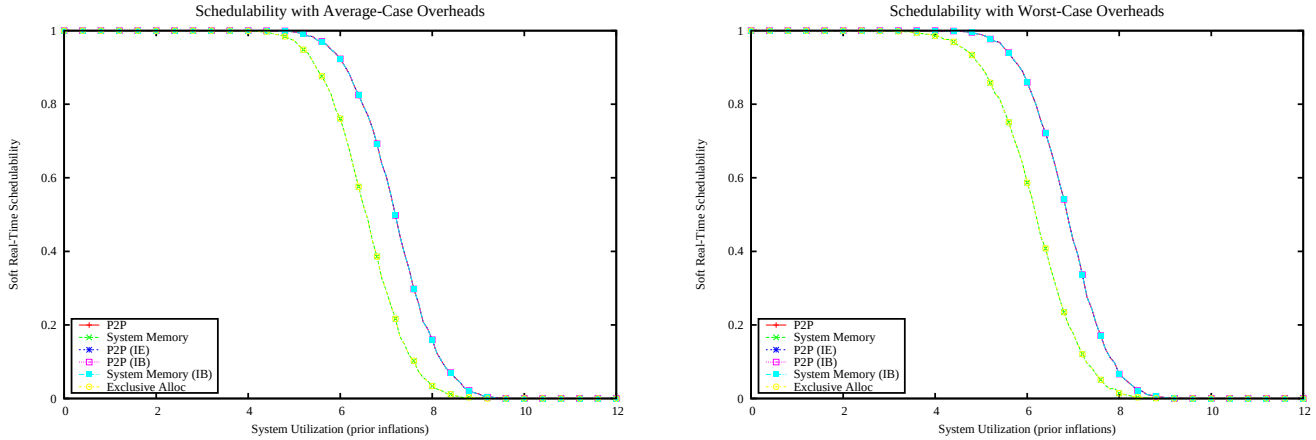

Figure 1540: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

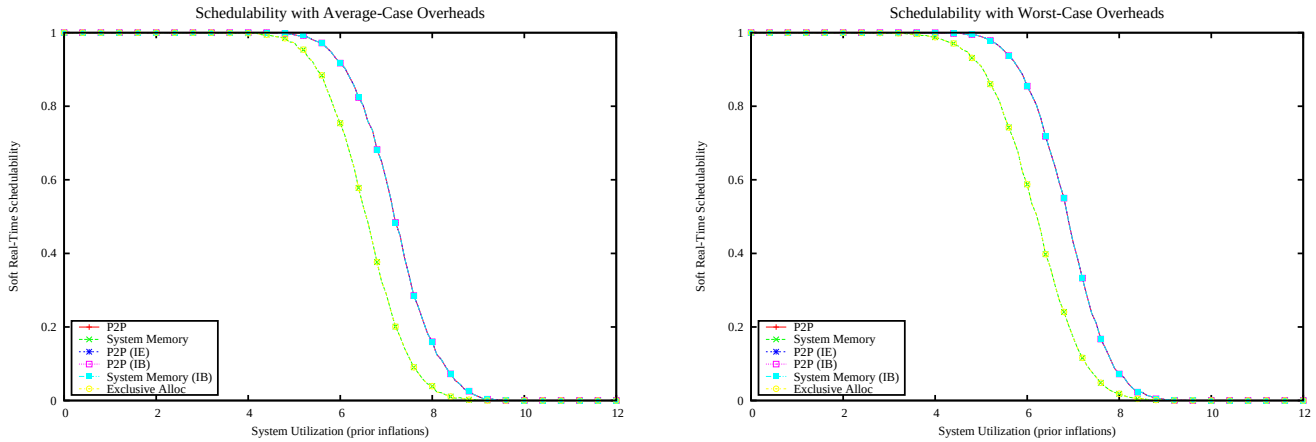

Figure 1541: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

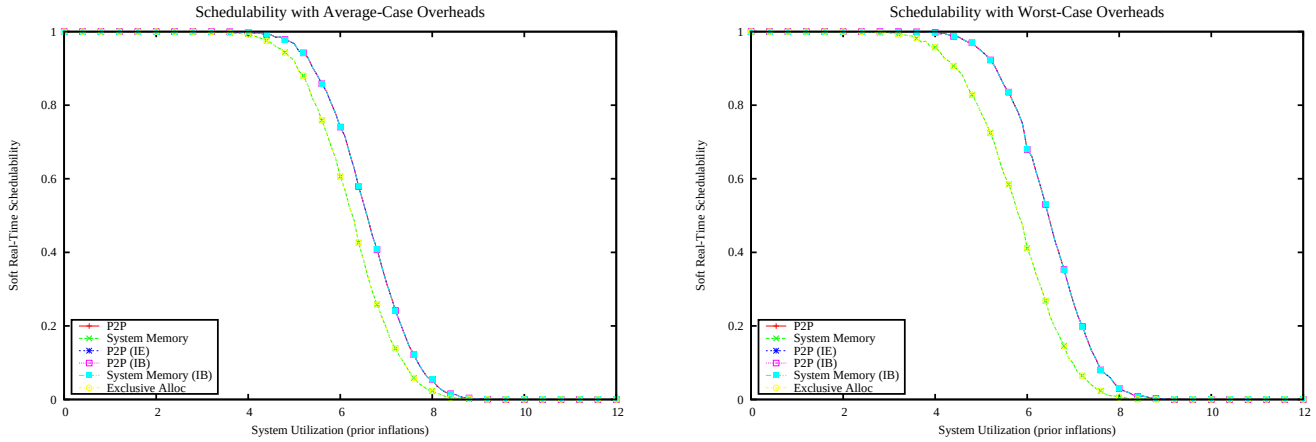

Figure 1542: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

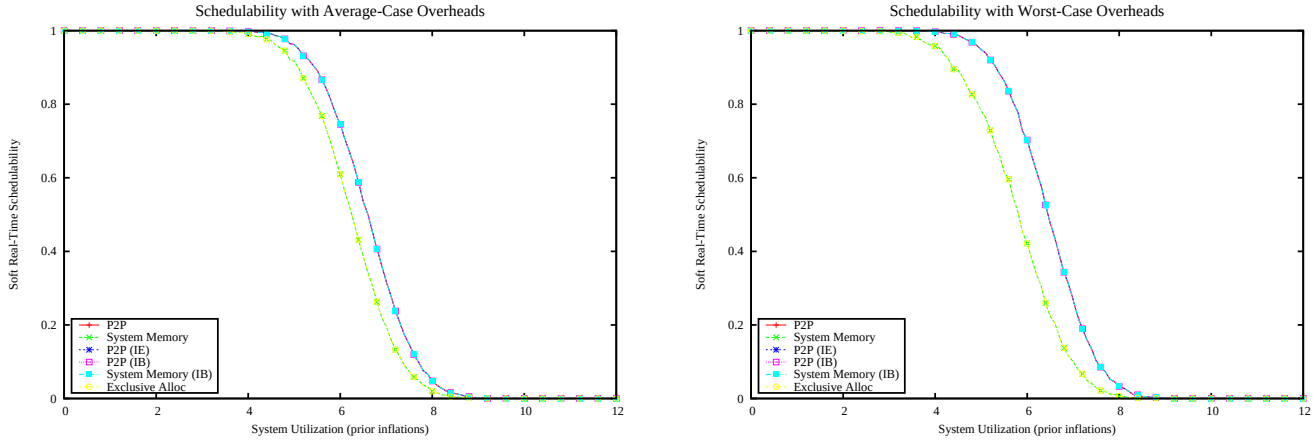

Figure 1543: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

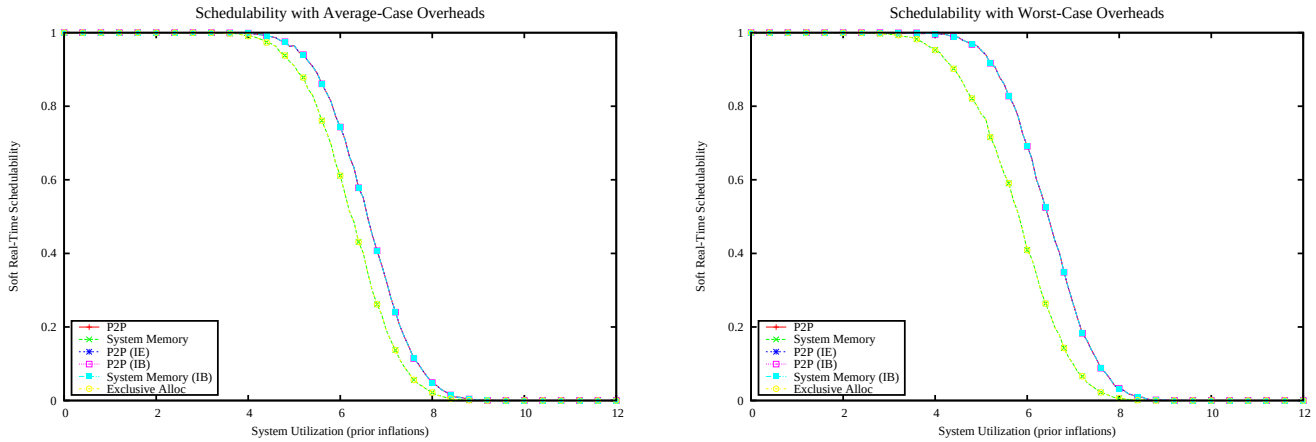

Figure 1544: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

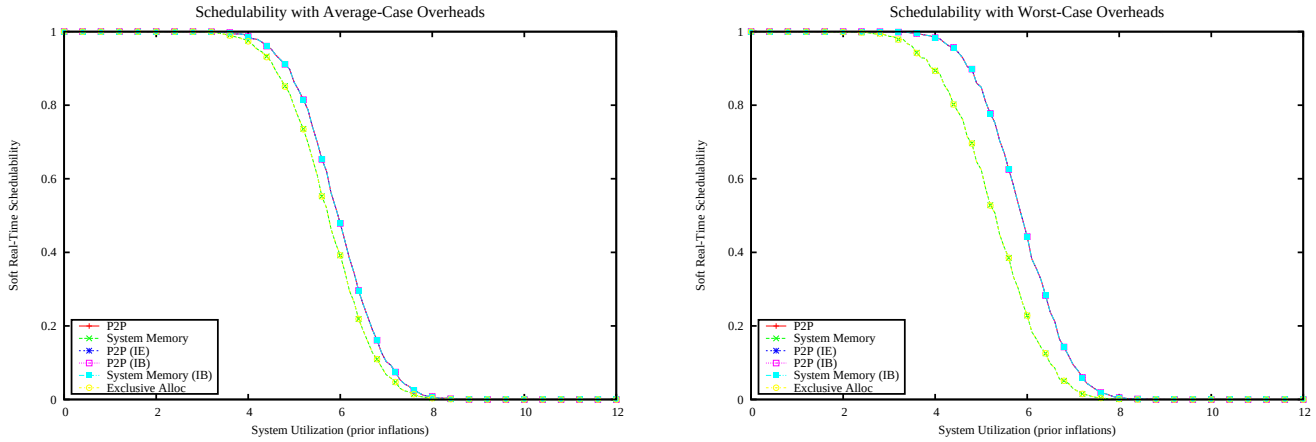

Figure 1545: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

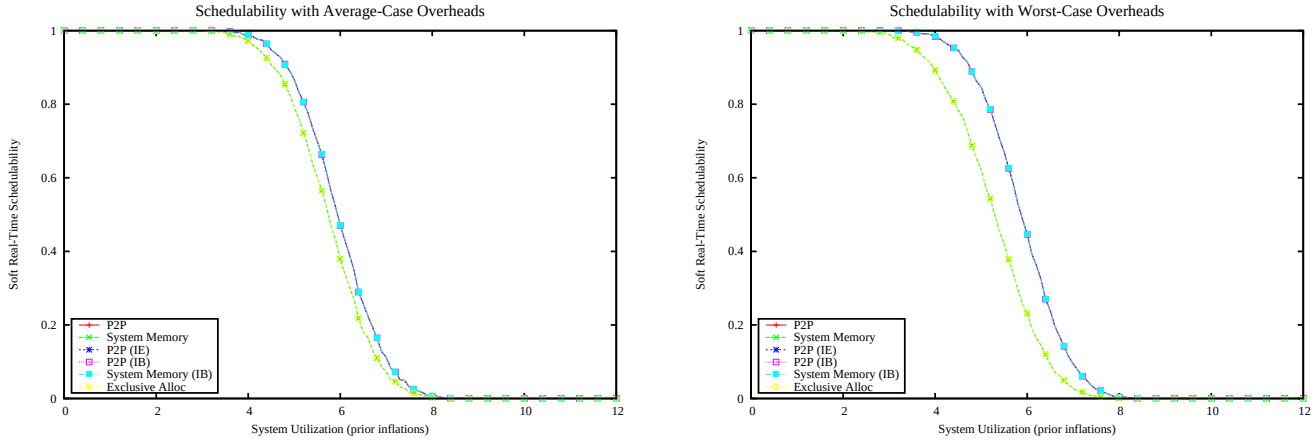

Figure 1546: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

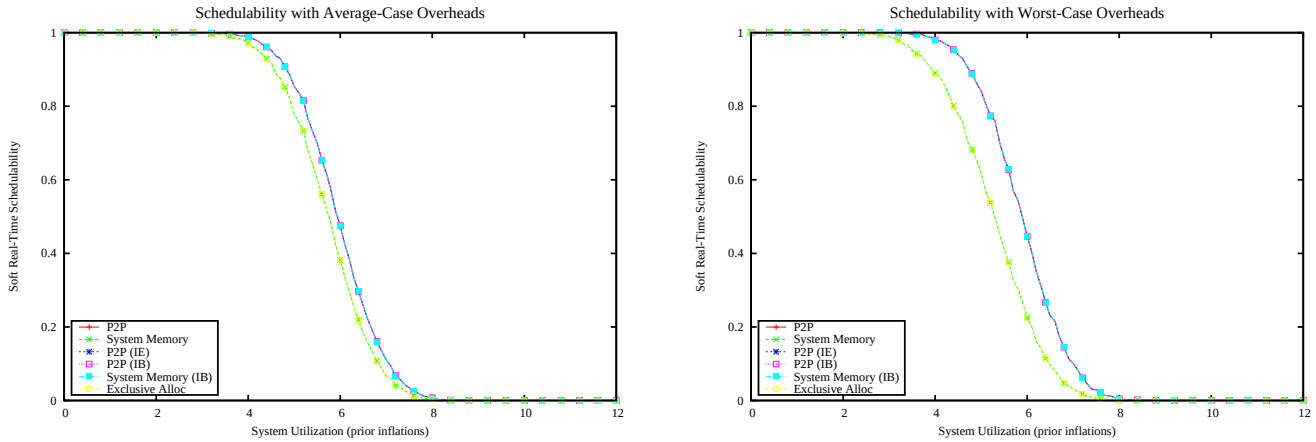

Figure 1547: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

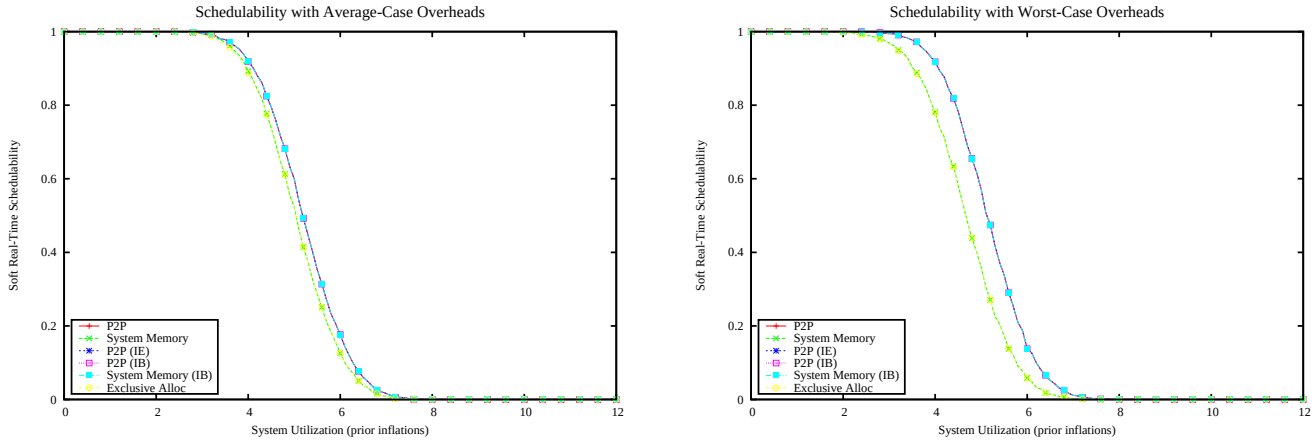

Figure 1548: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

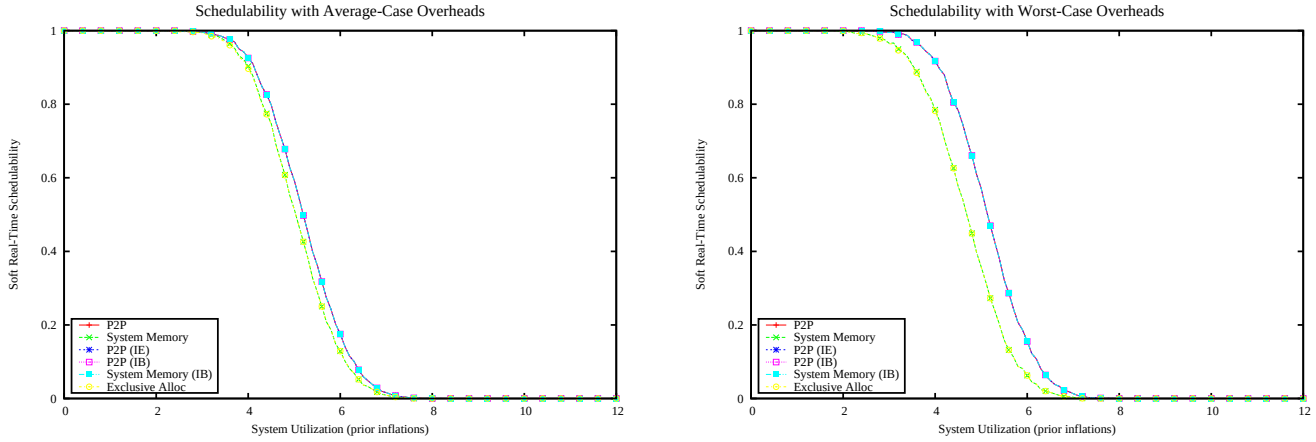

Figure 1549: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

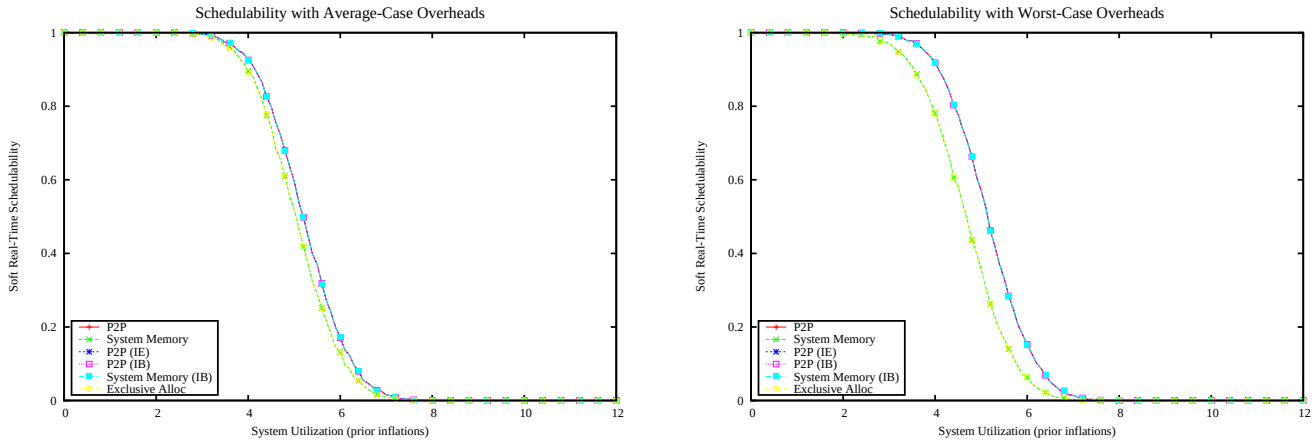

Figure 1550: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

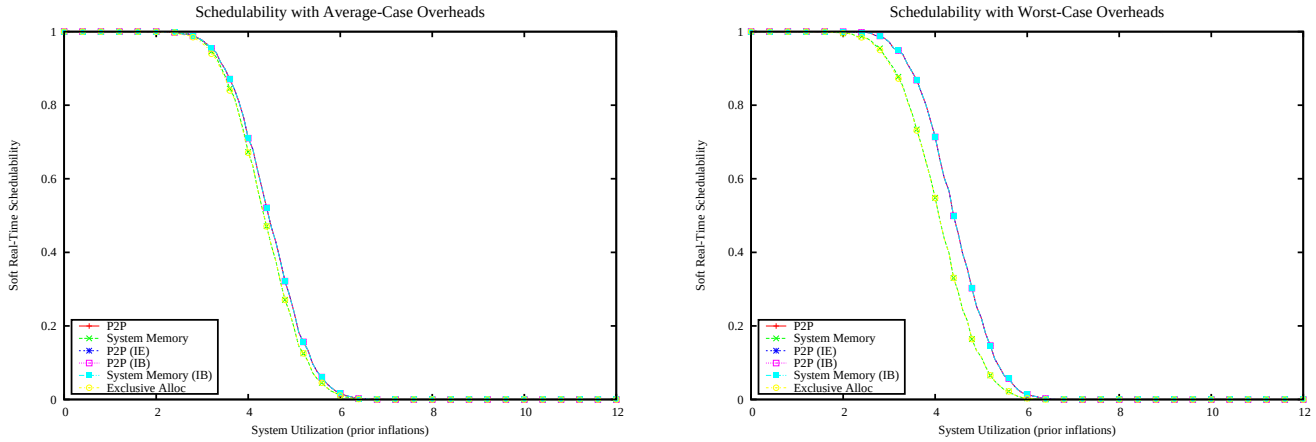

Figure 1551: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

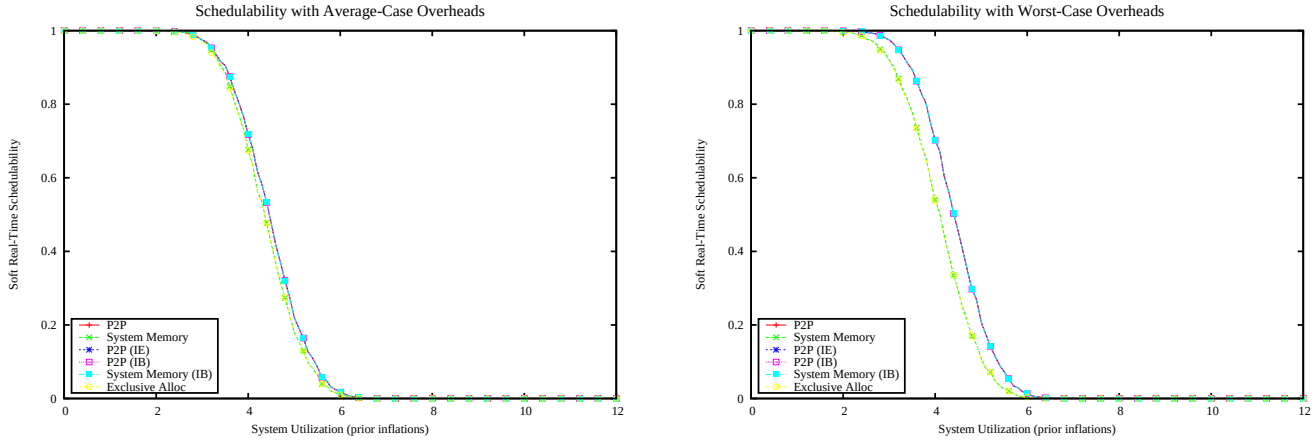

Figure 1552: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

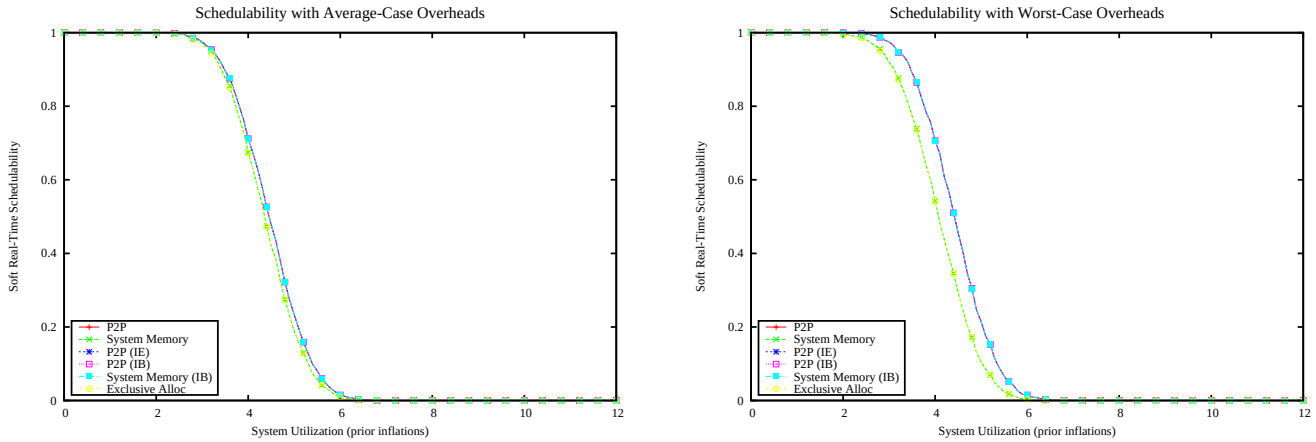

Figure 1553: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

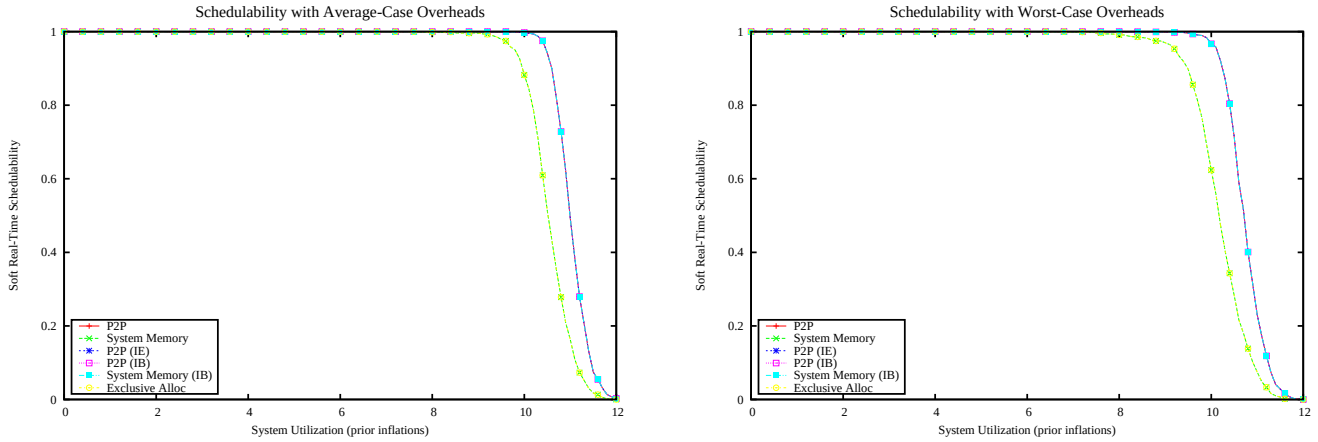

Figure 1554: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

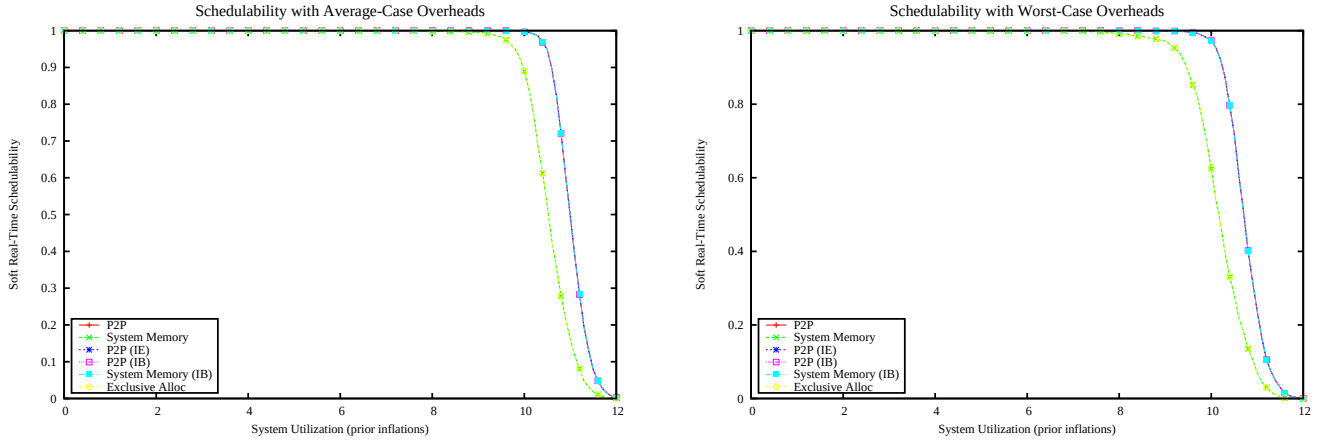

Figure 1555: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

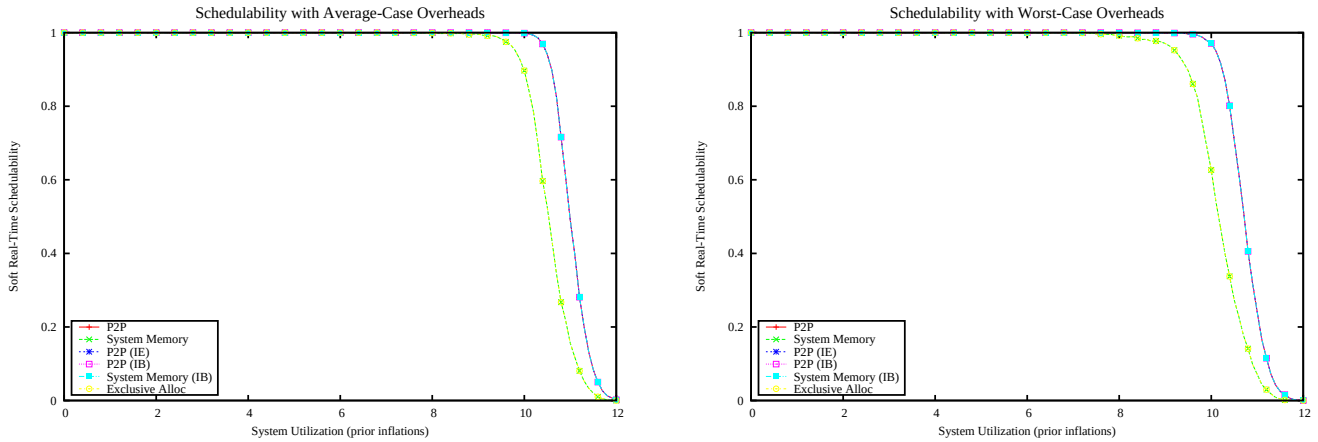

Figure 1556: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

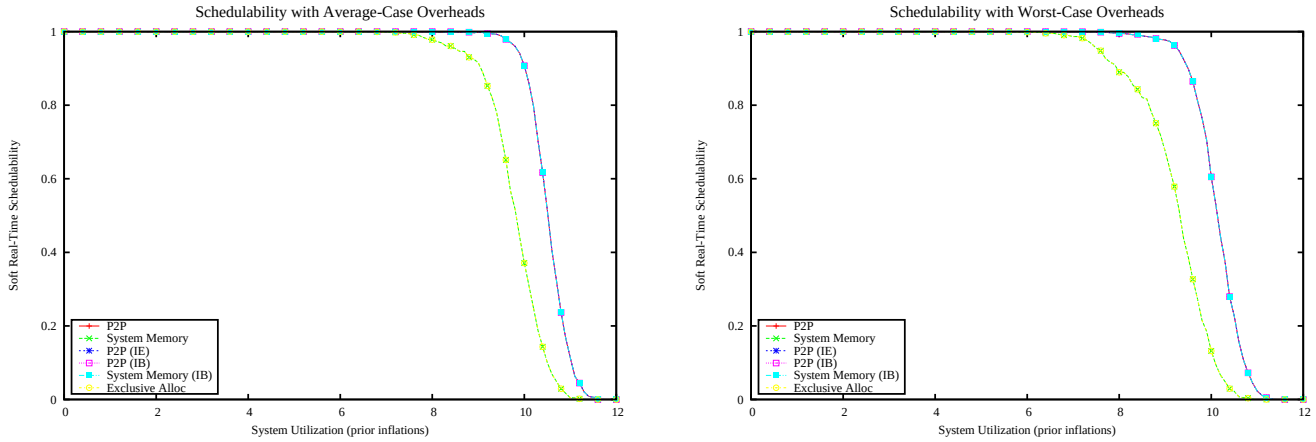

Figure 1557: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

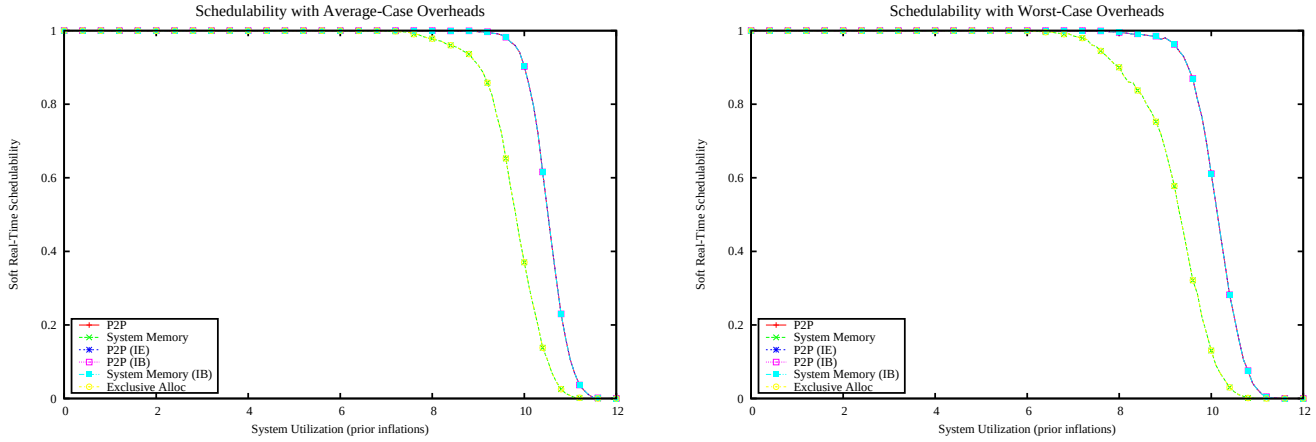

Figure 1558: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

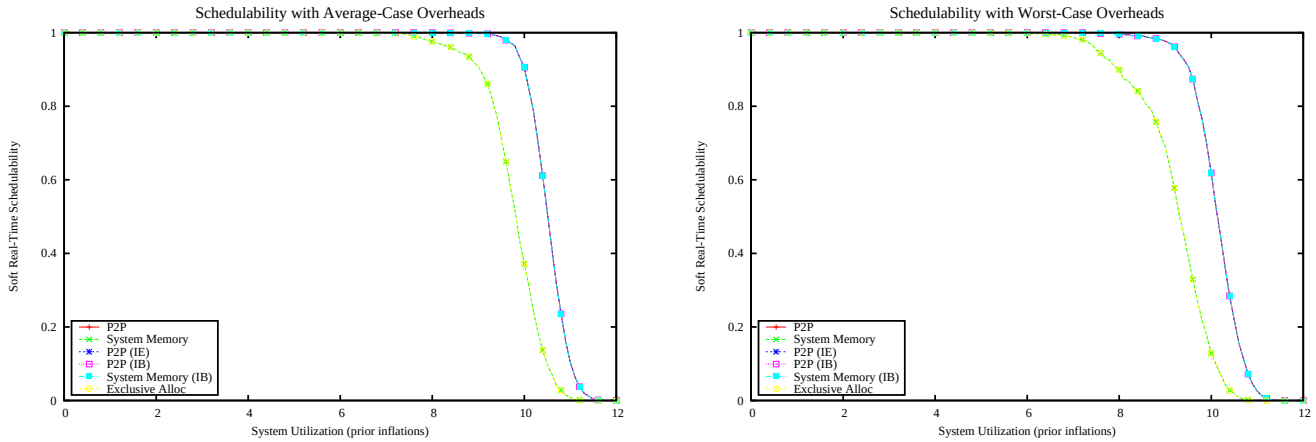

Figure 1559: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

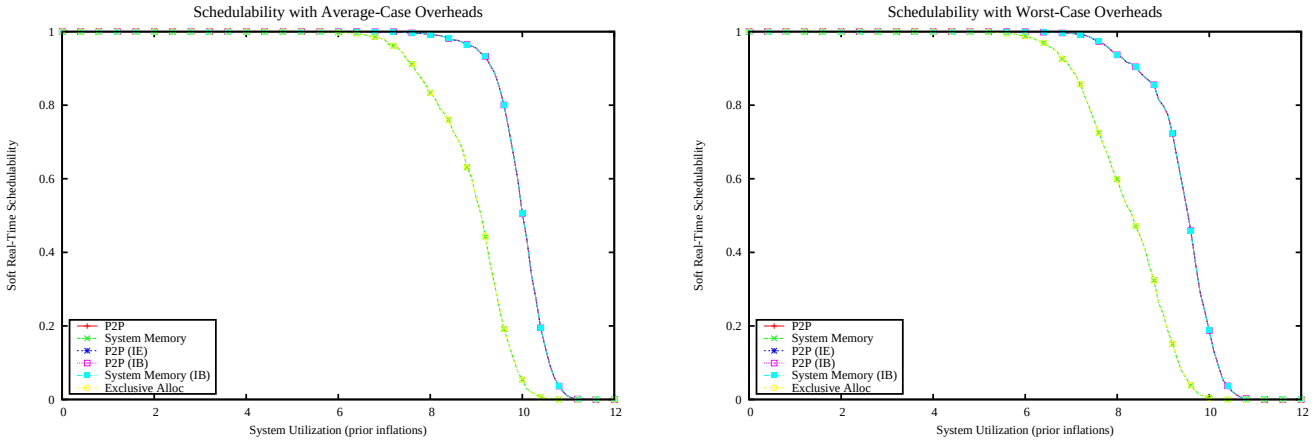

Figure 1560: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

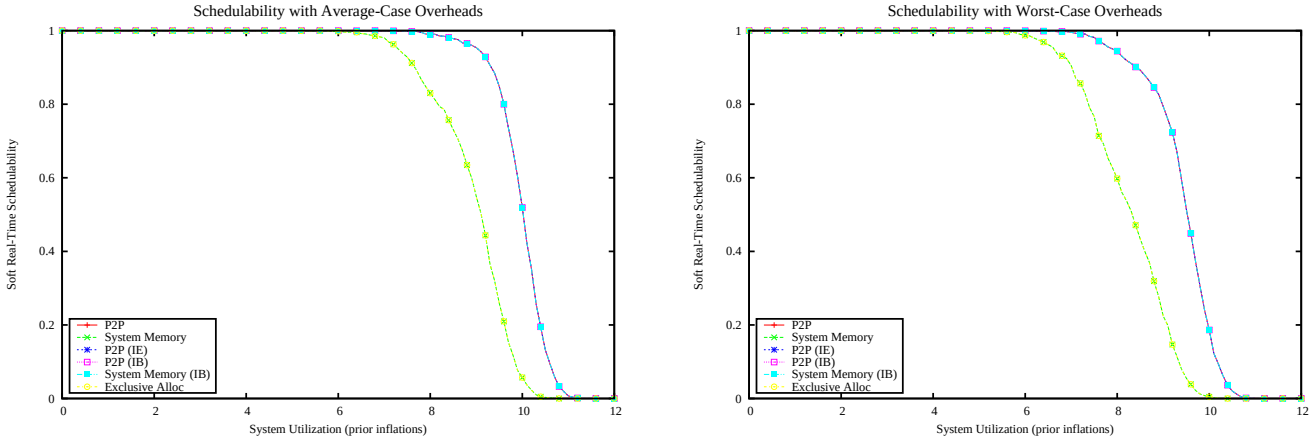

Figure 1561: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

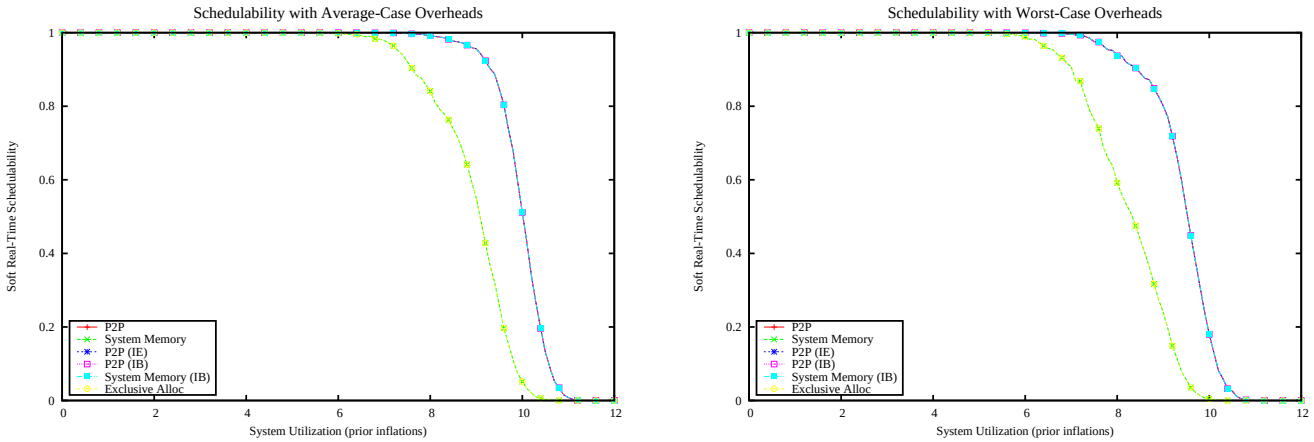

Figure 1562: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

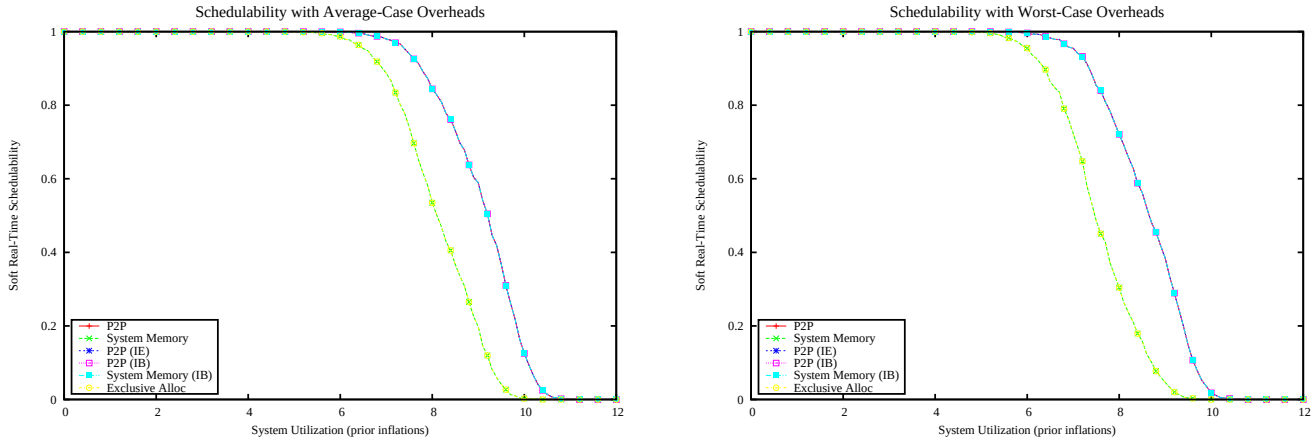

Figure 1563: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

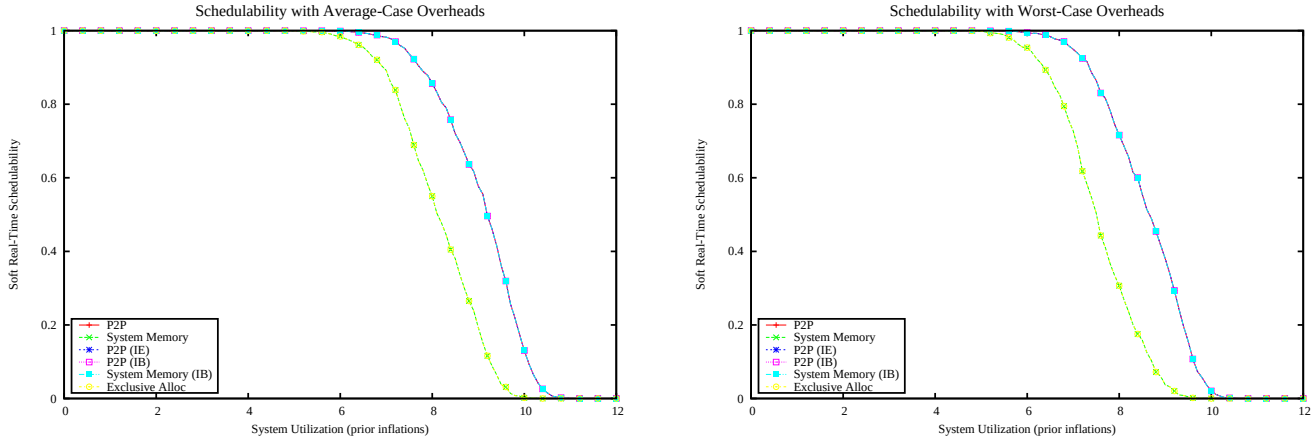

Figure 1564: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

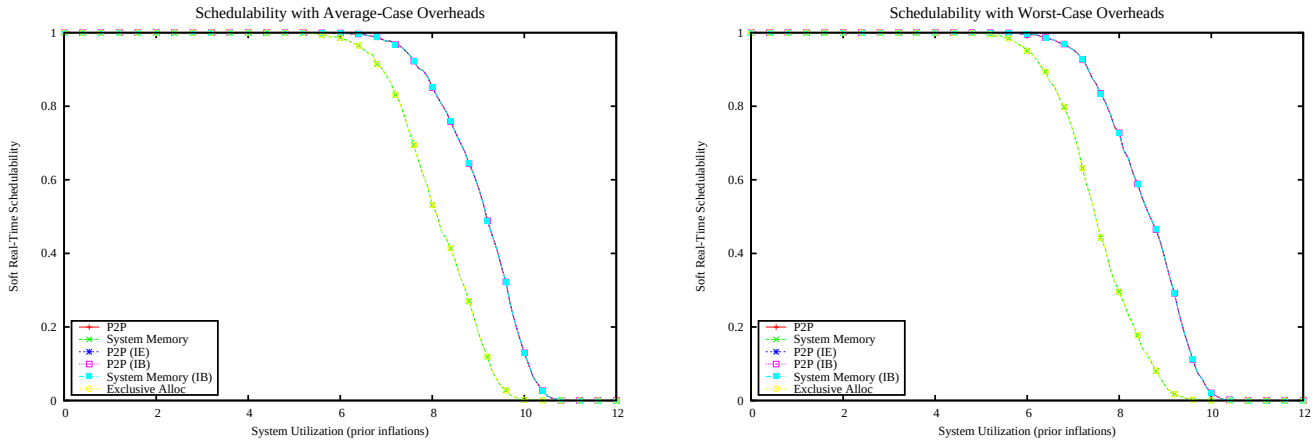

Figure 1565: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

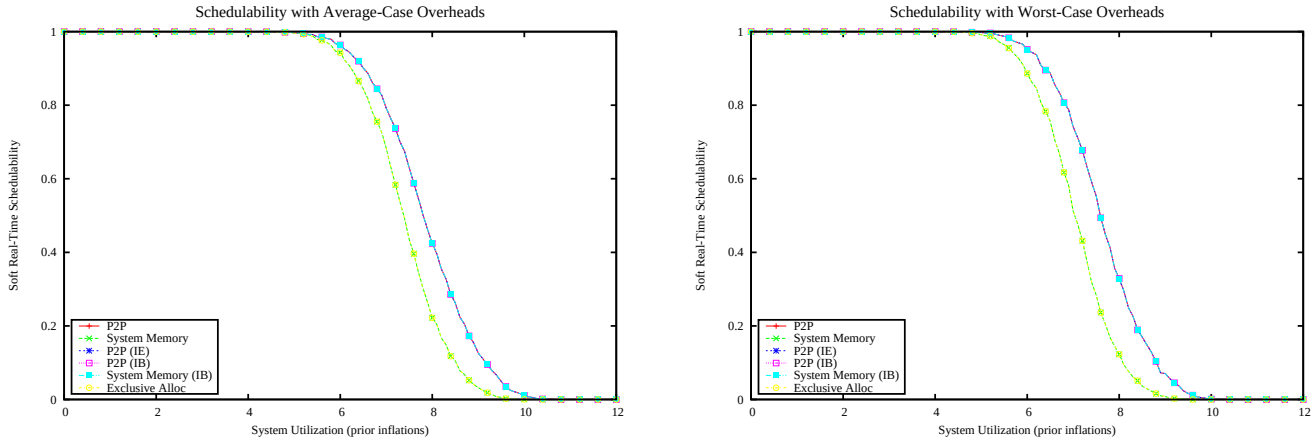

Figure 1566: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

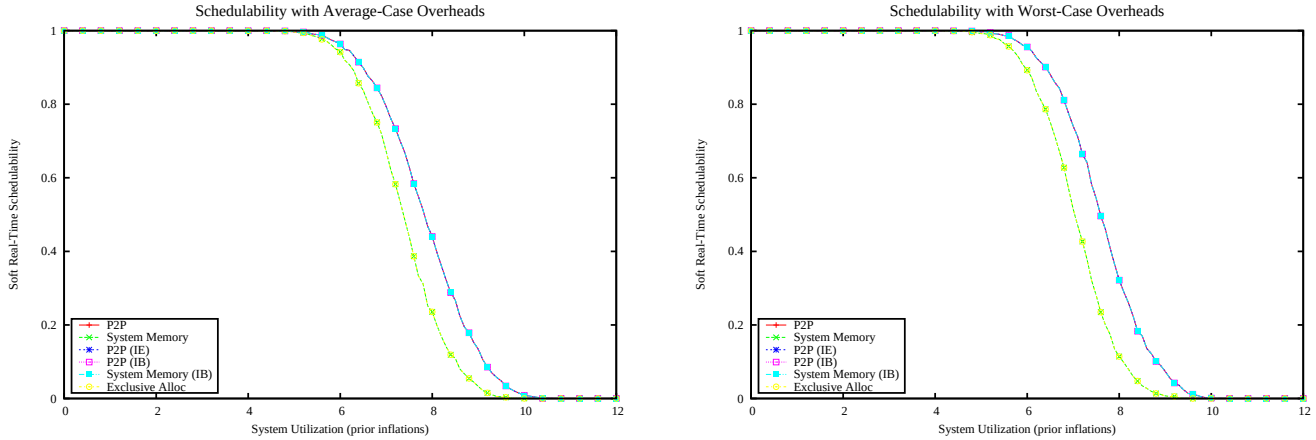

Figure 1567: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

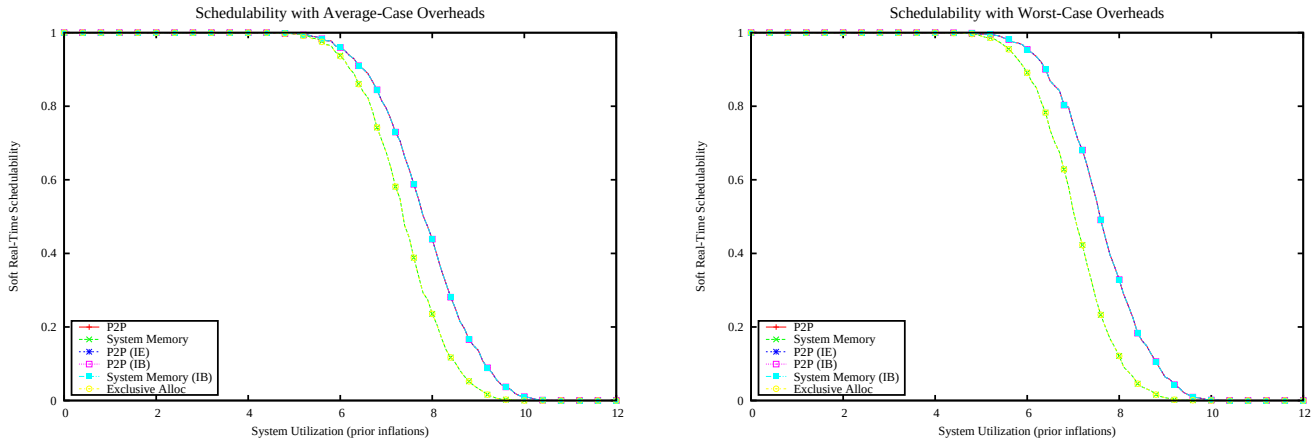

Figure 1568: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

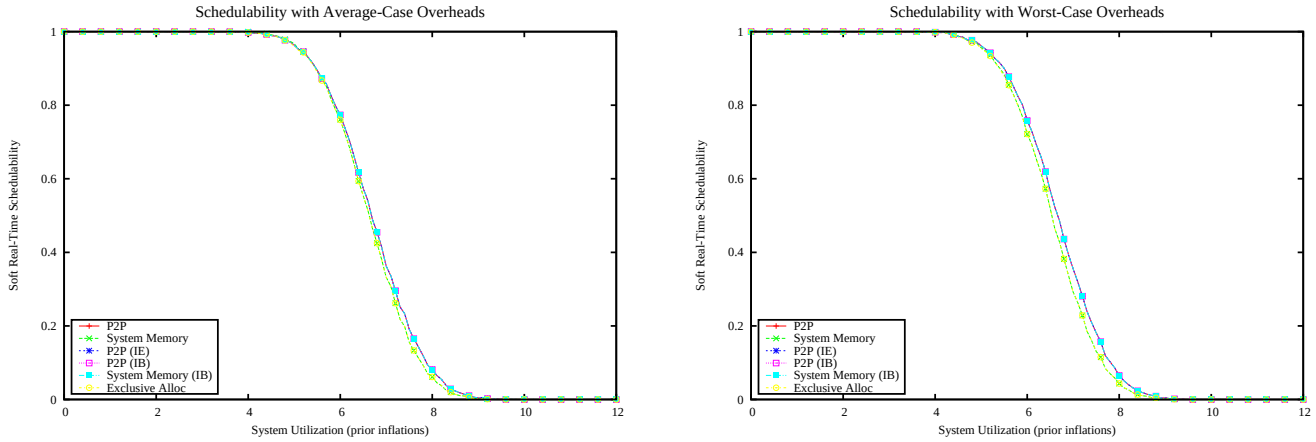

Figure 1569: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

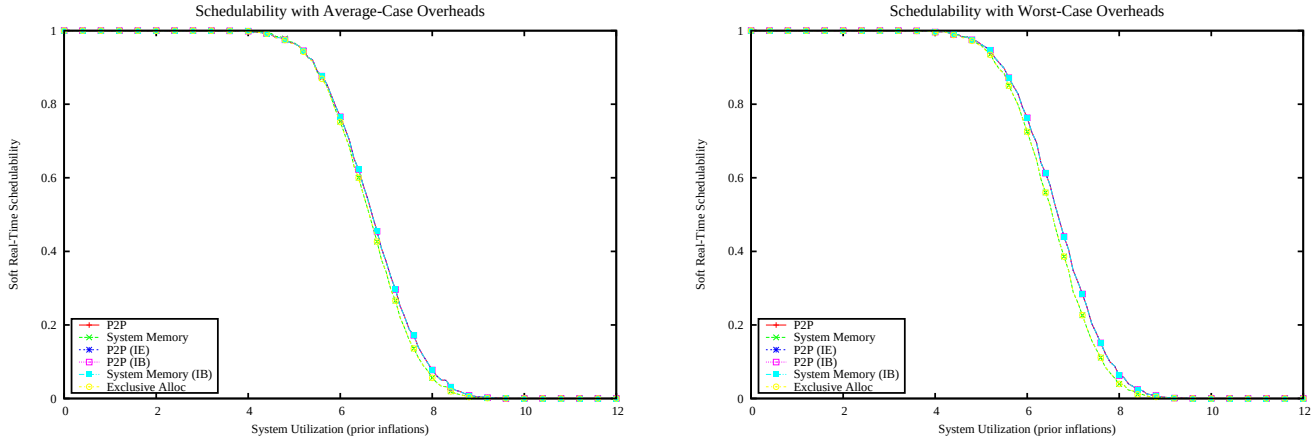

Figure 1570: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

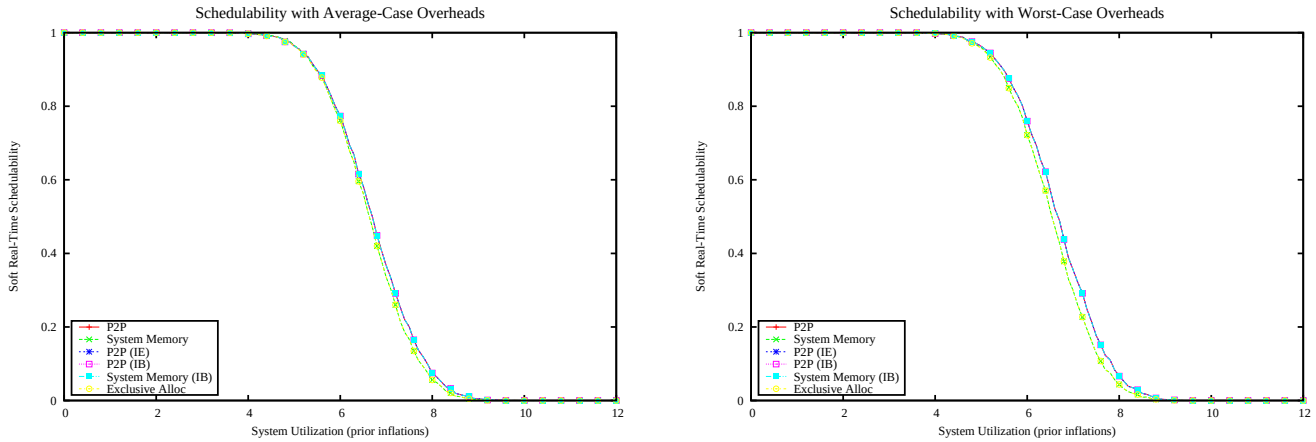

Figure 1571: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

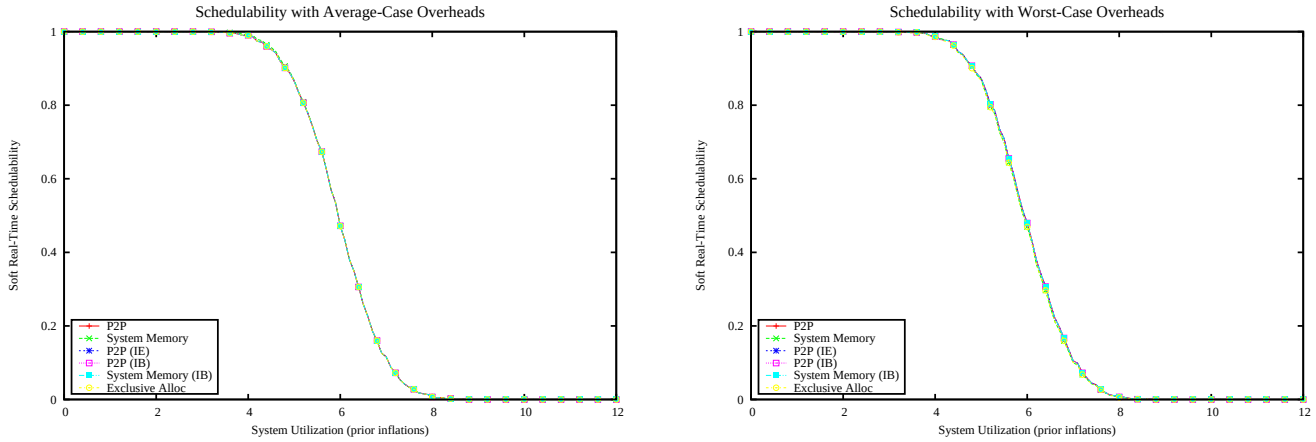

Figure 1572: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

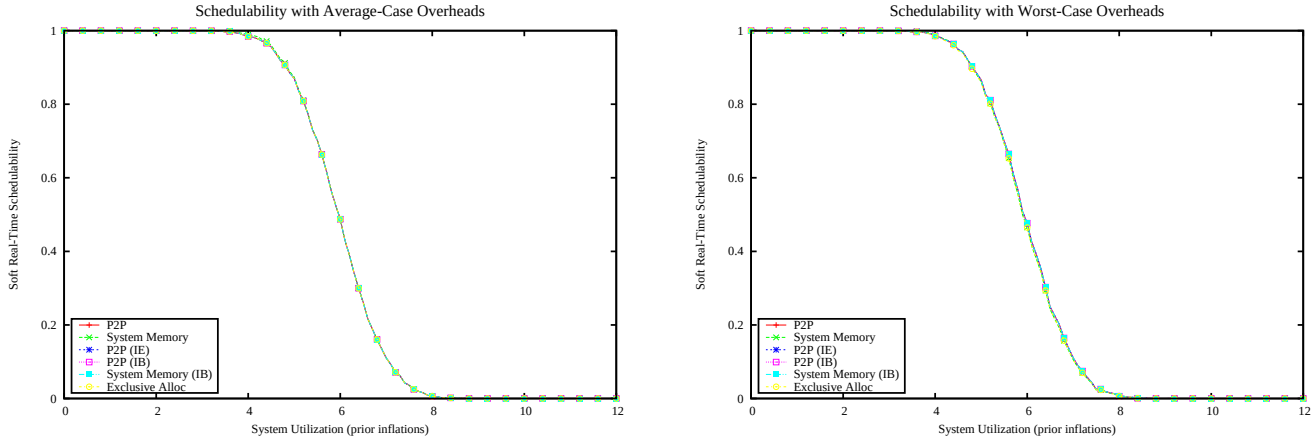

Figure 1573: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

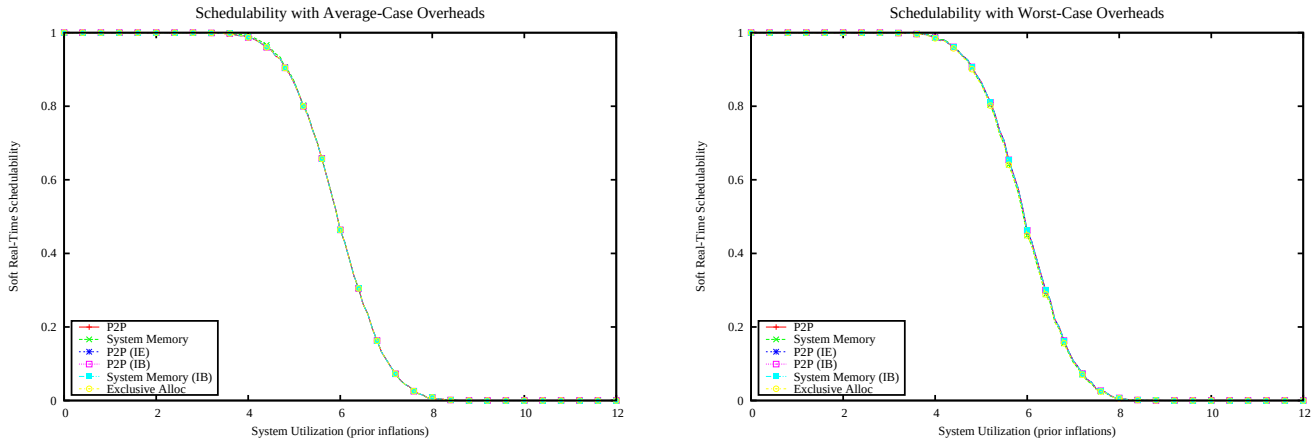

Figure 1574: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

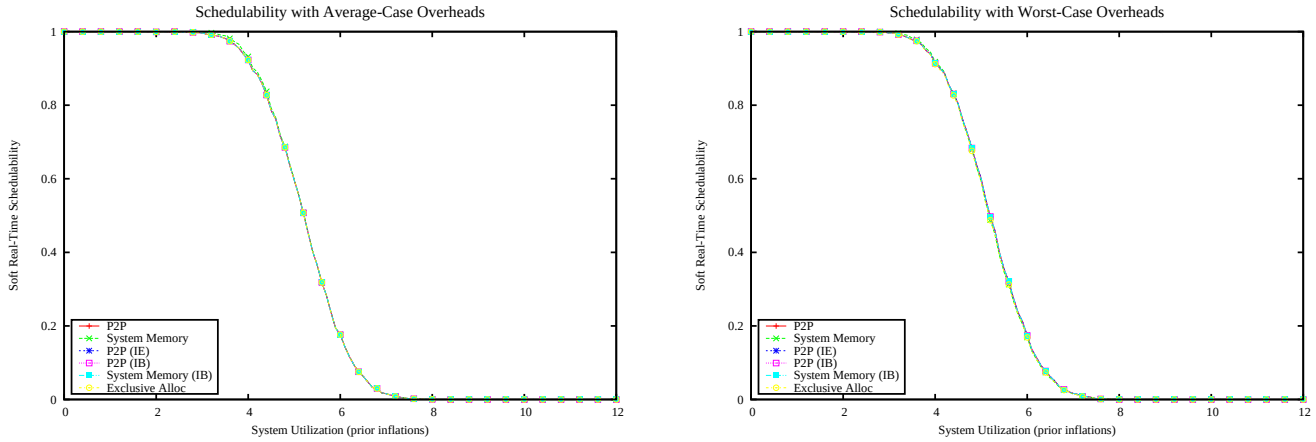

Figure 1575: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

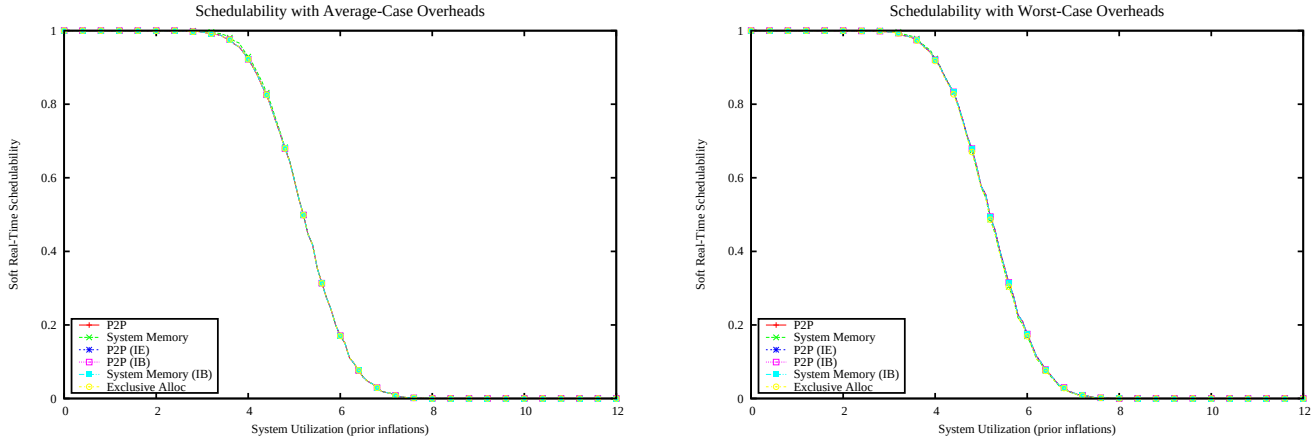

Figure 1576: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

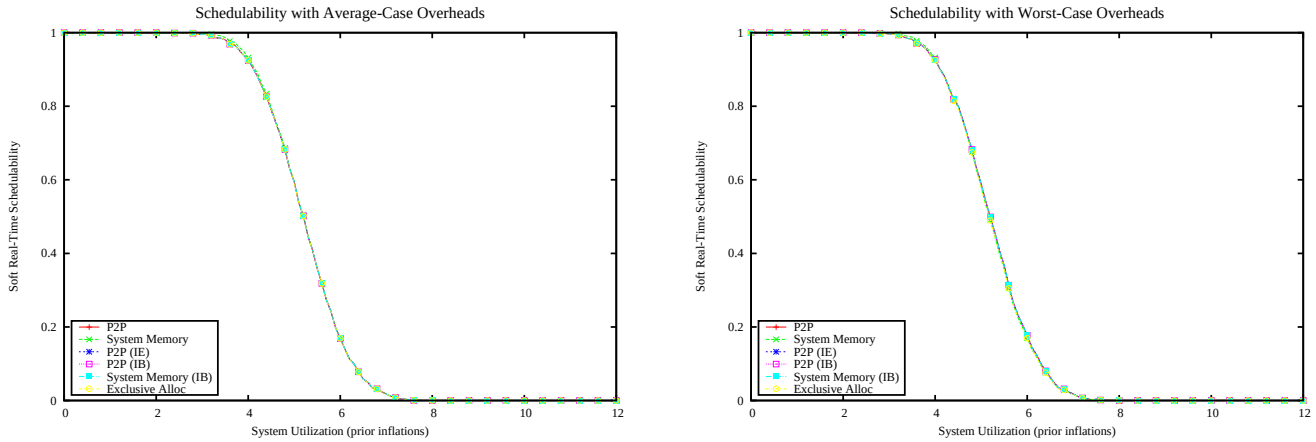

Figure 1577: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

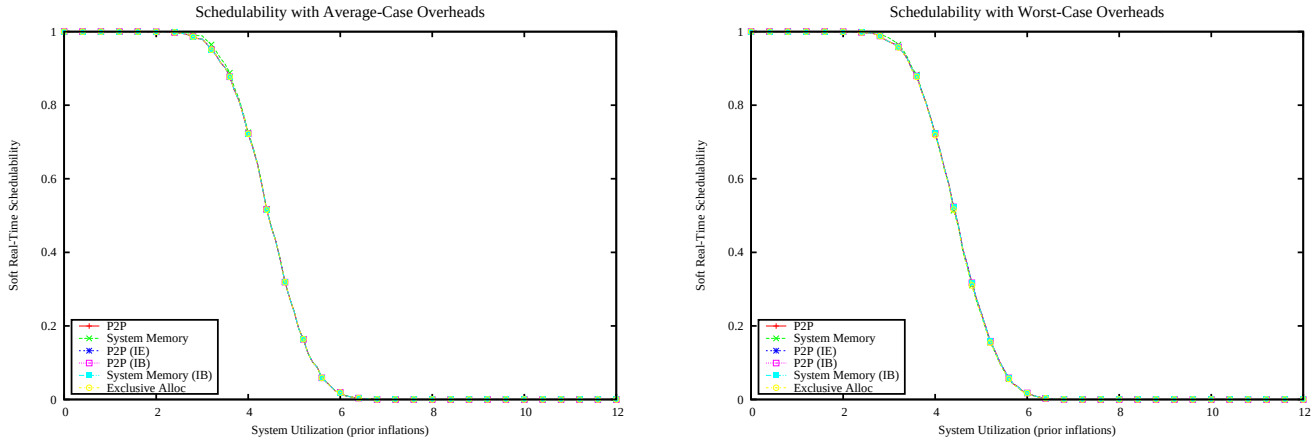

Figure 1578: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

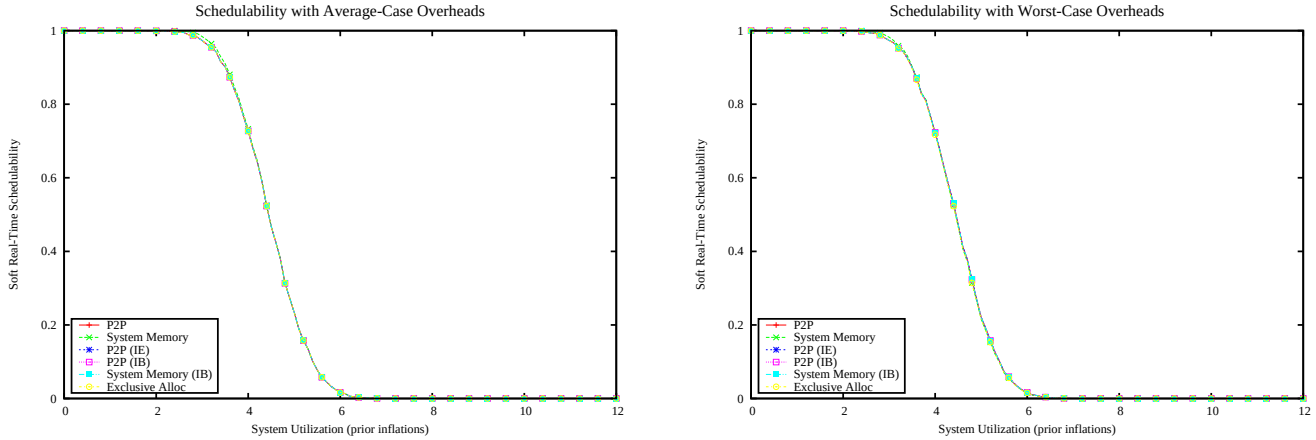

Figure 1579: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

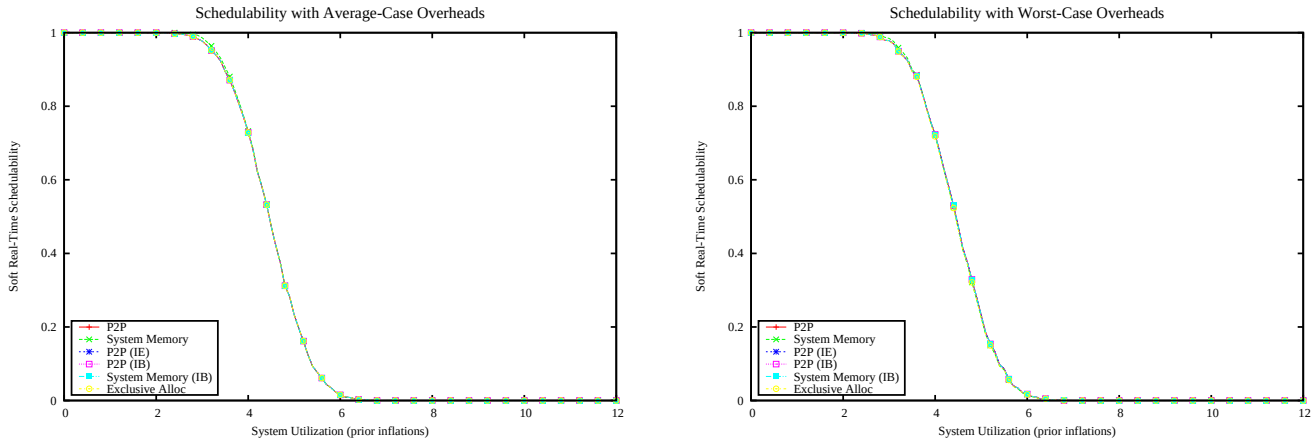

Figure 1580: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

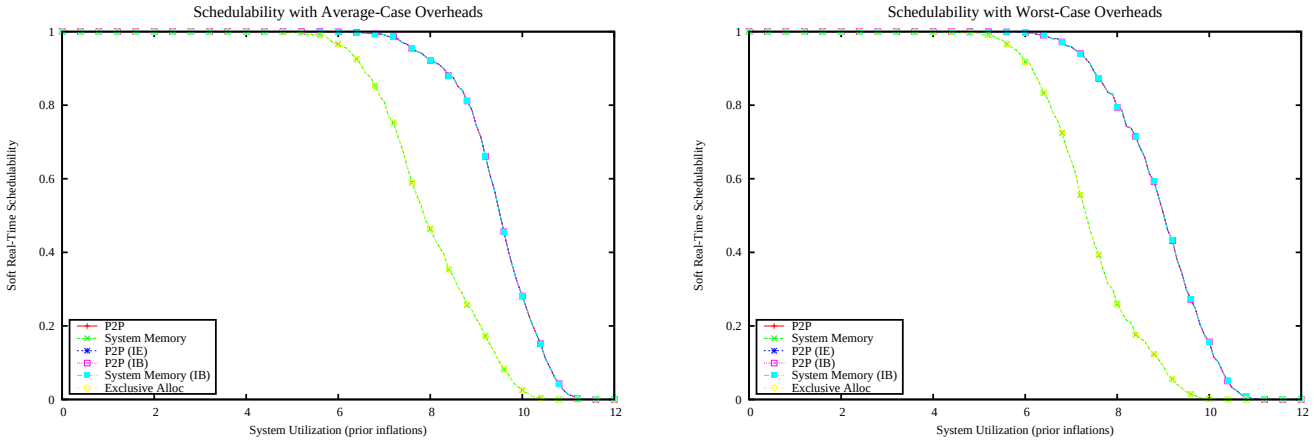

Figure 1581: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

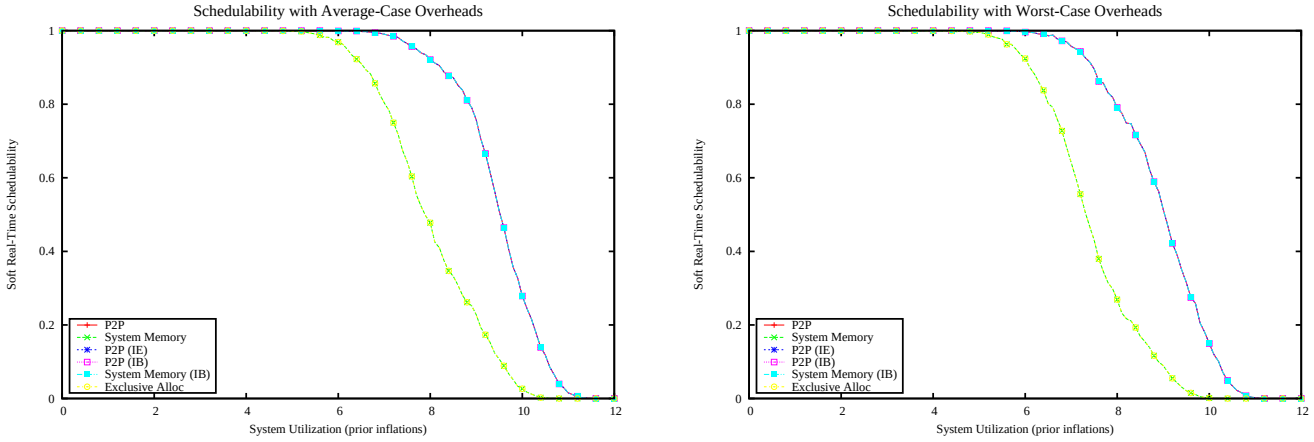

Figure 1582: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

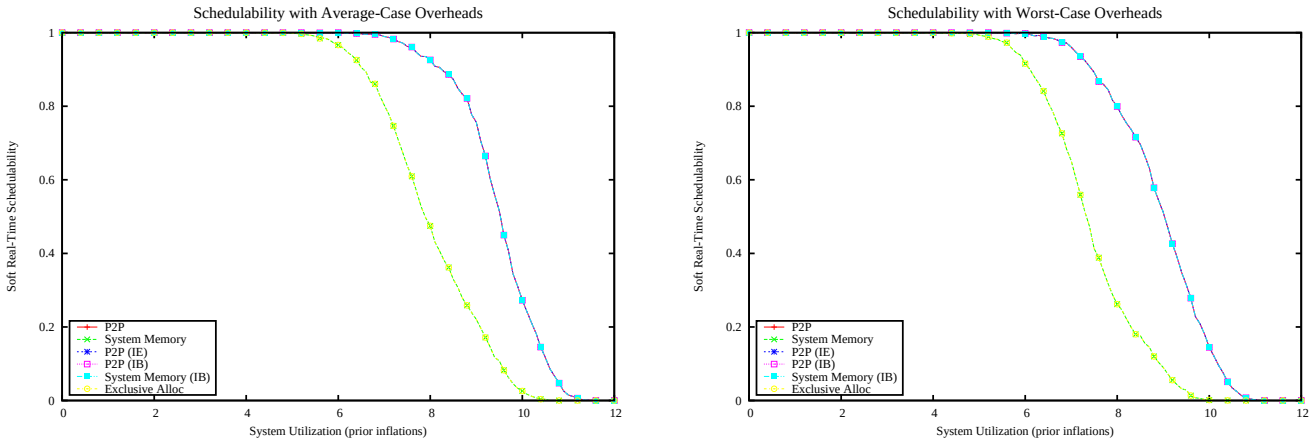

Figure 1583: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

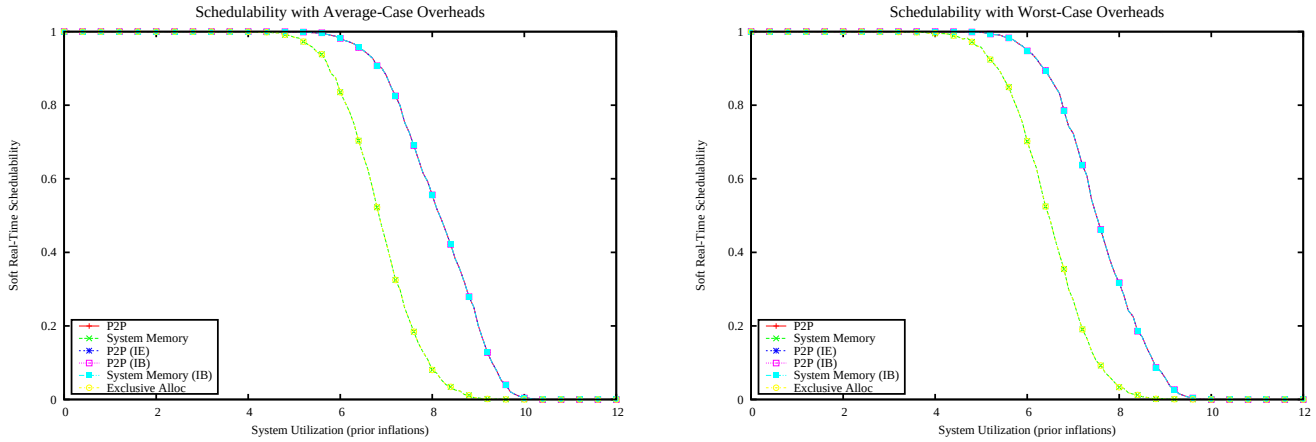

Figure 1584: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

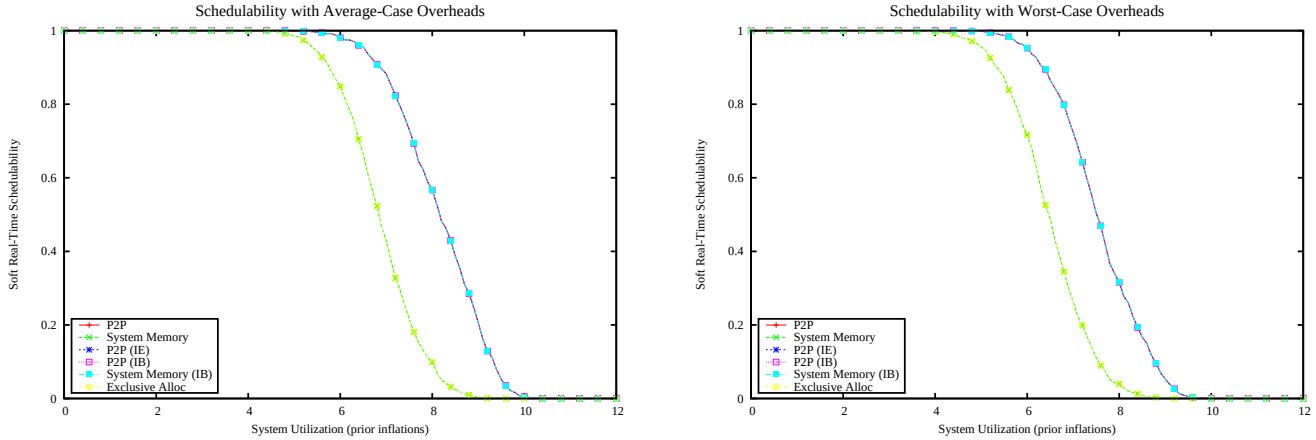

Figure 1585: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

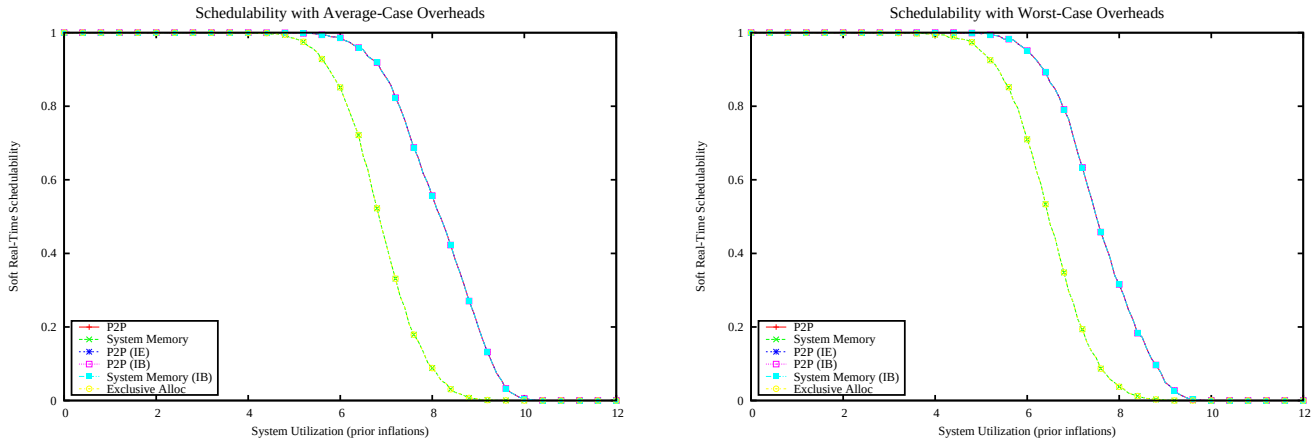

Figure 1586: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

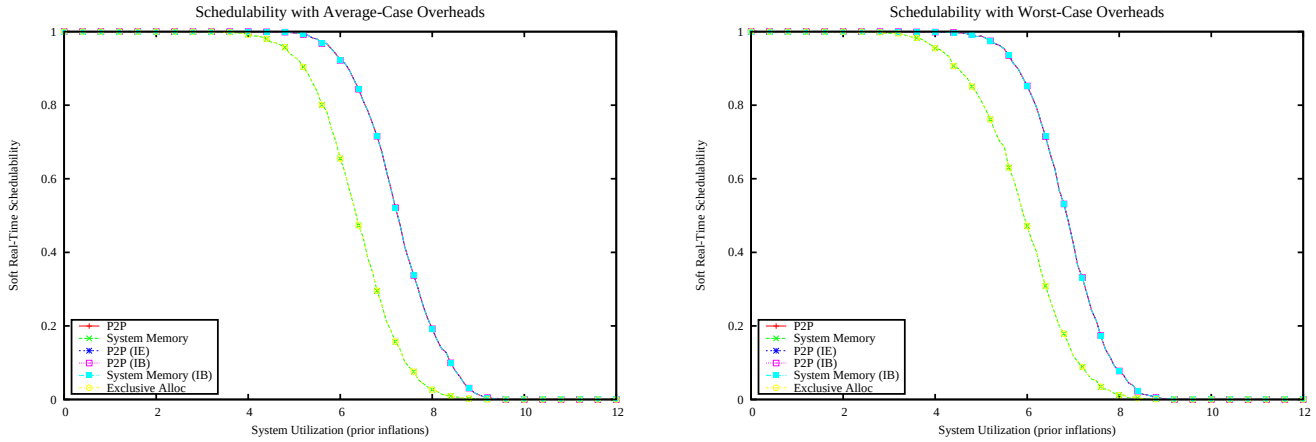

Figure 1587: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

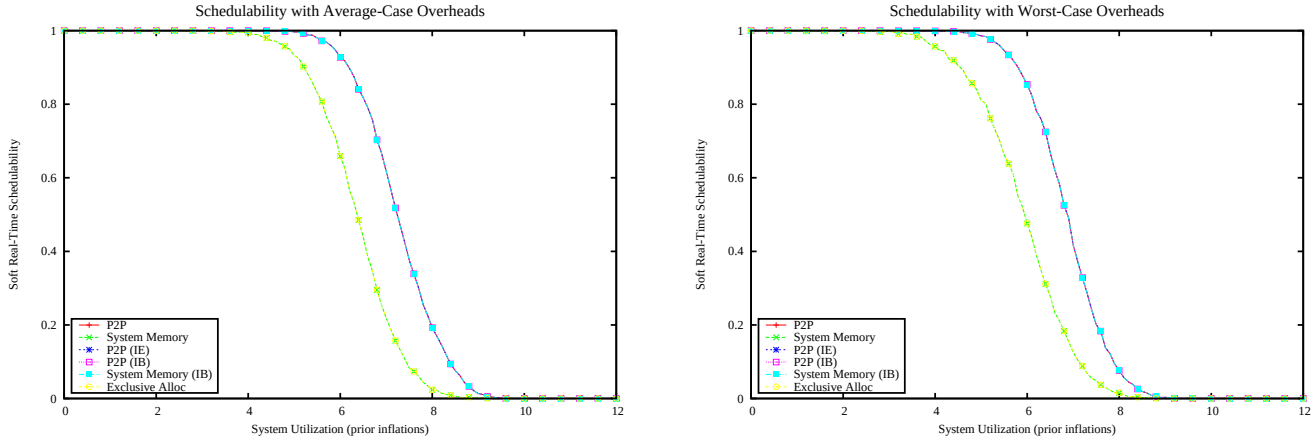

Figure 1588: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

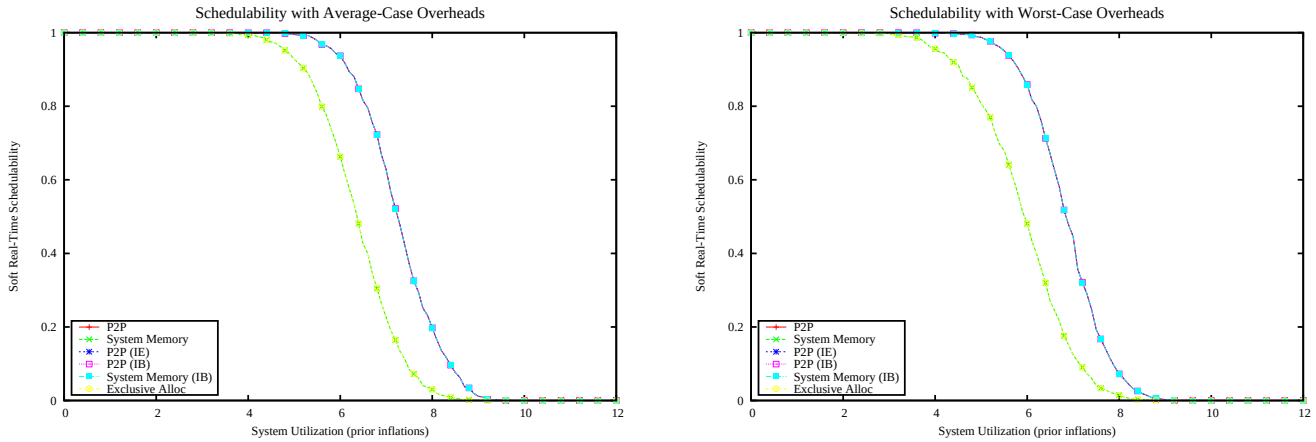

Figure 1589: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

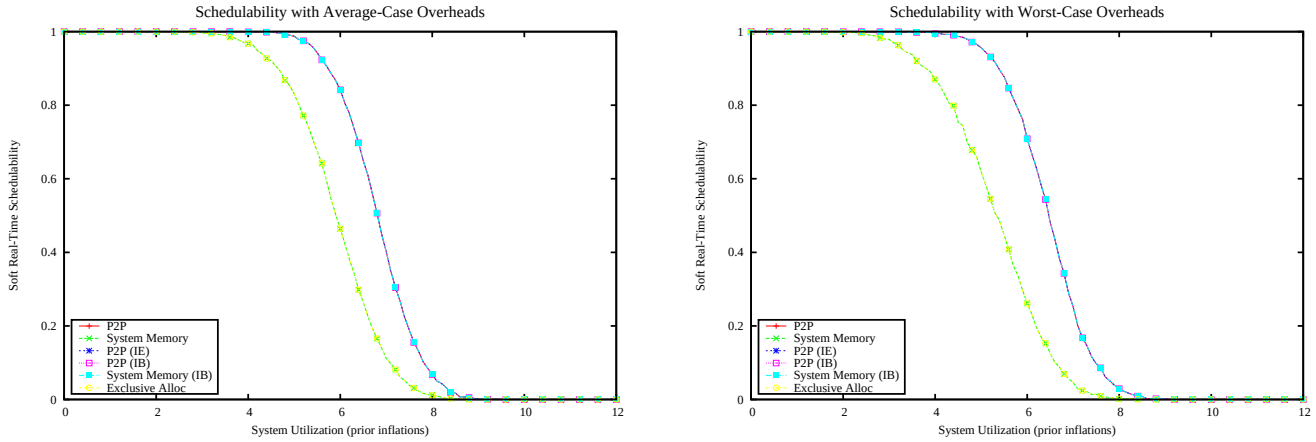

Figure 1590: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

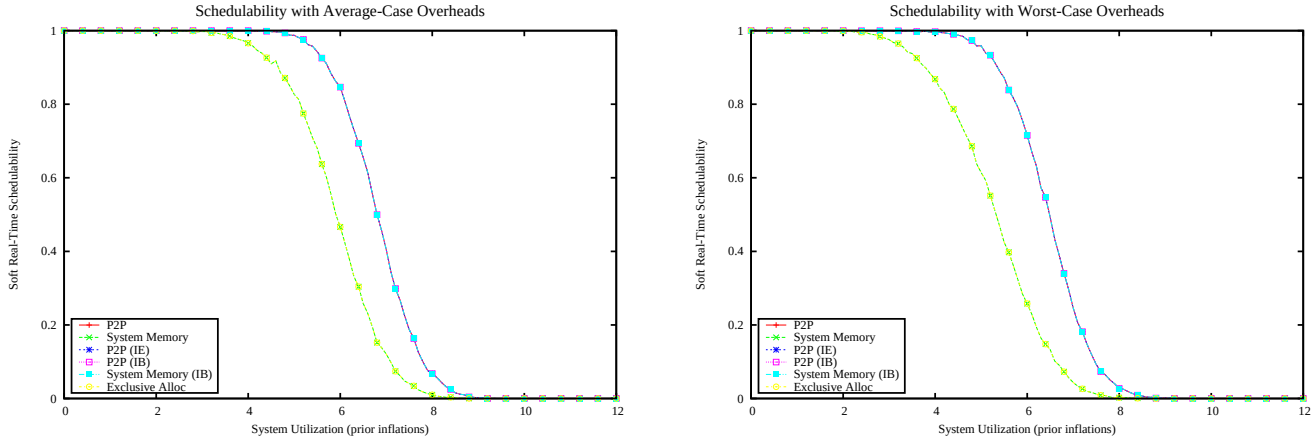

Figure 1591: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

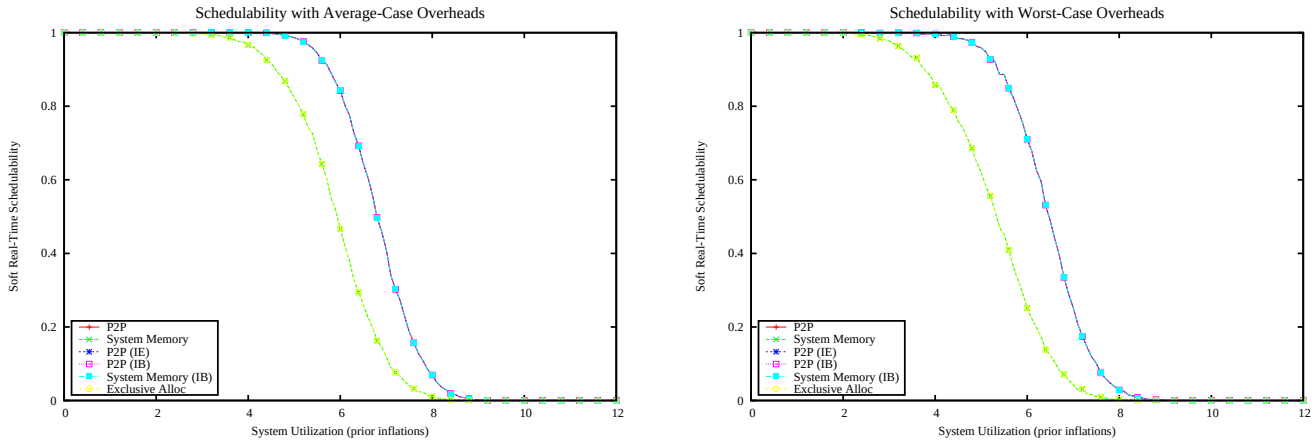

Figure 1592: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

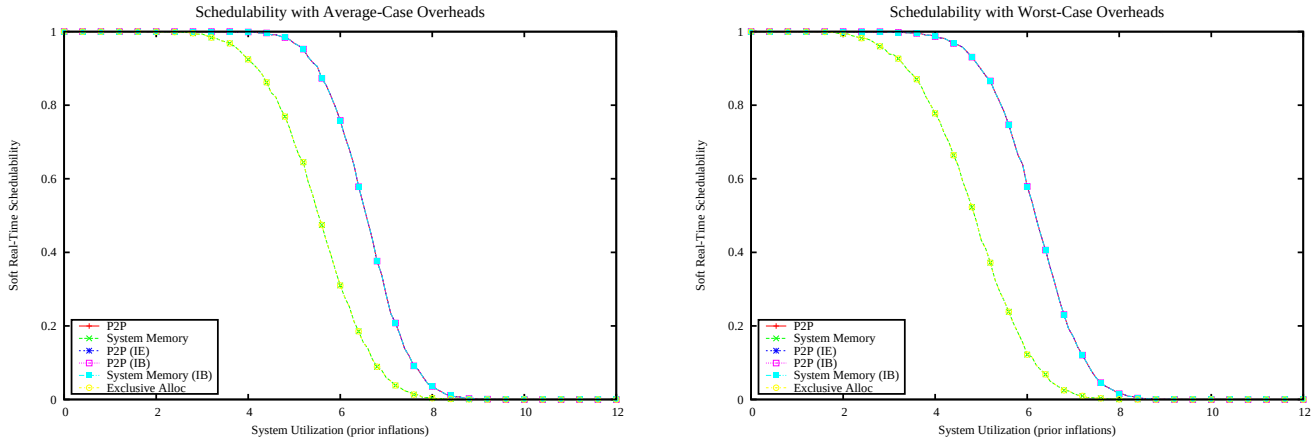

Figure 1593: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

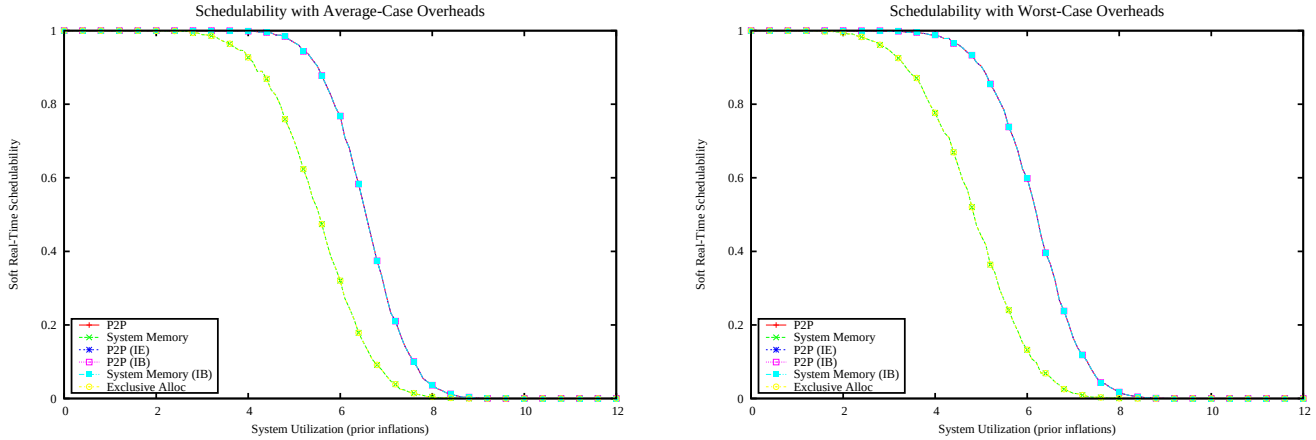

Figure 1594: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

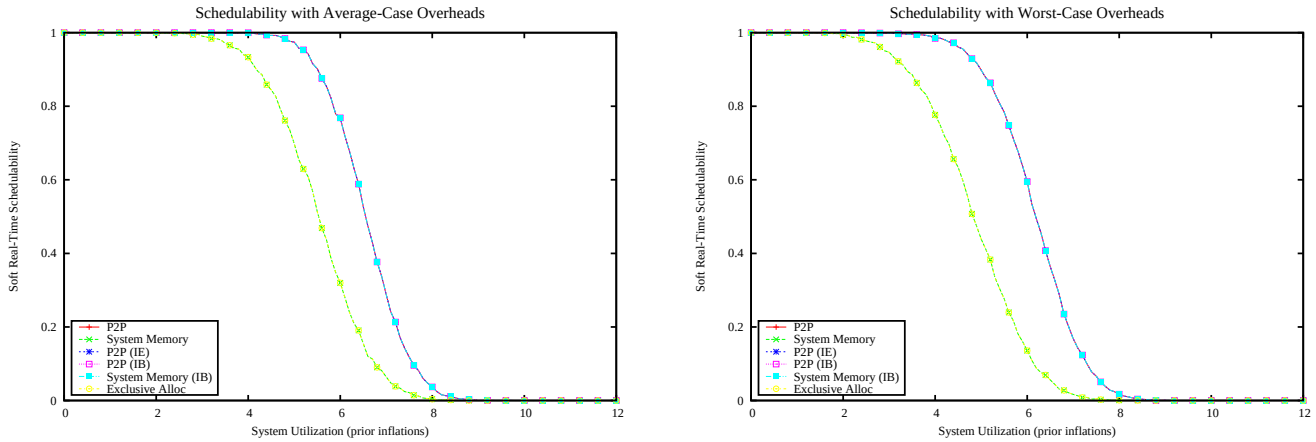

Figure 1595: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

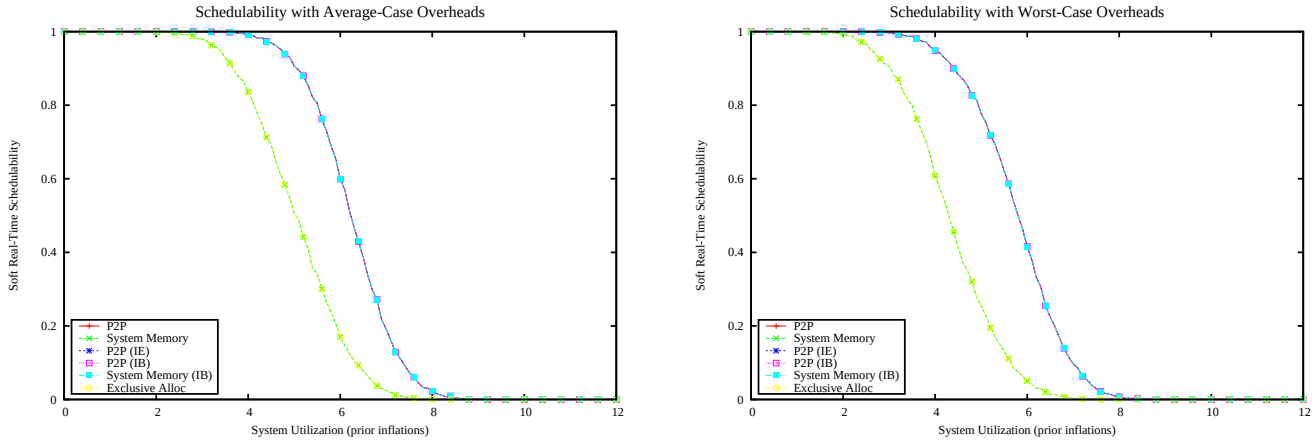

Figure 1596: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

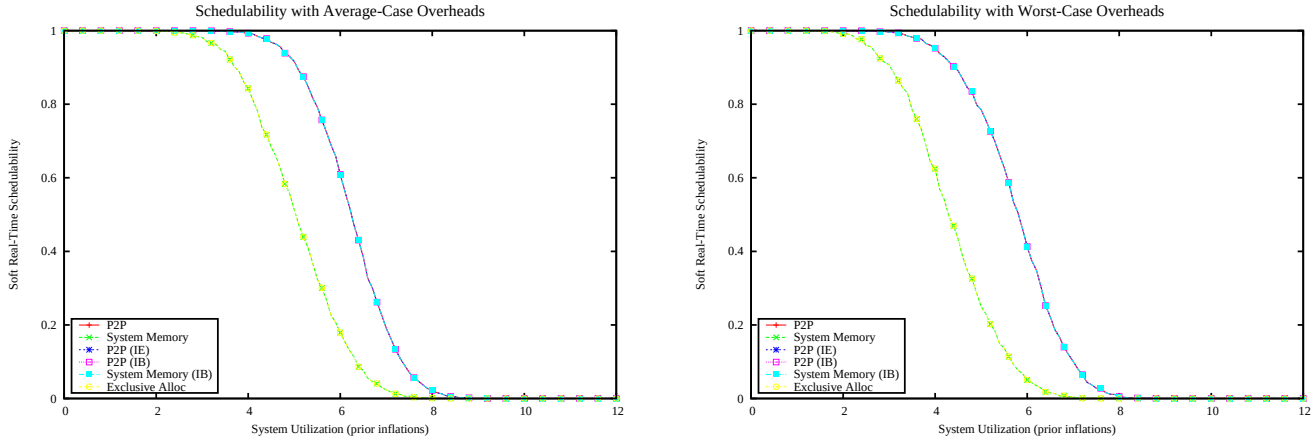

Figure 1597: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

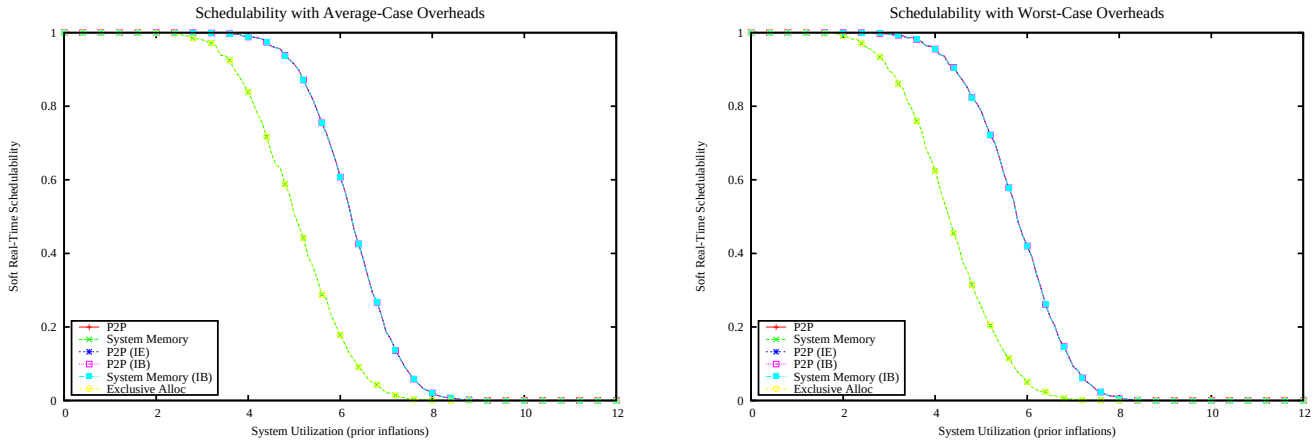

Figure 1598: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

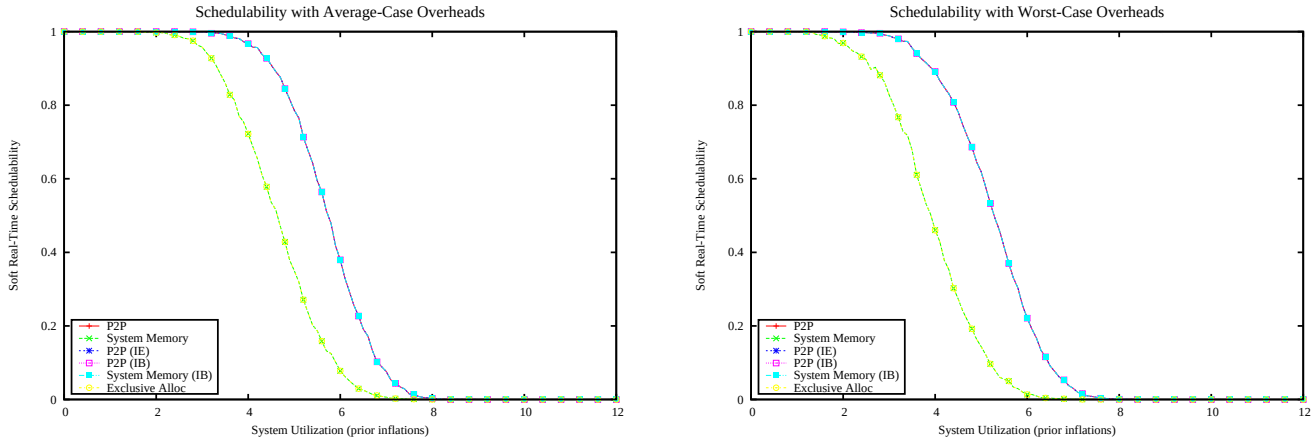

Figure 1599: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

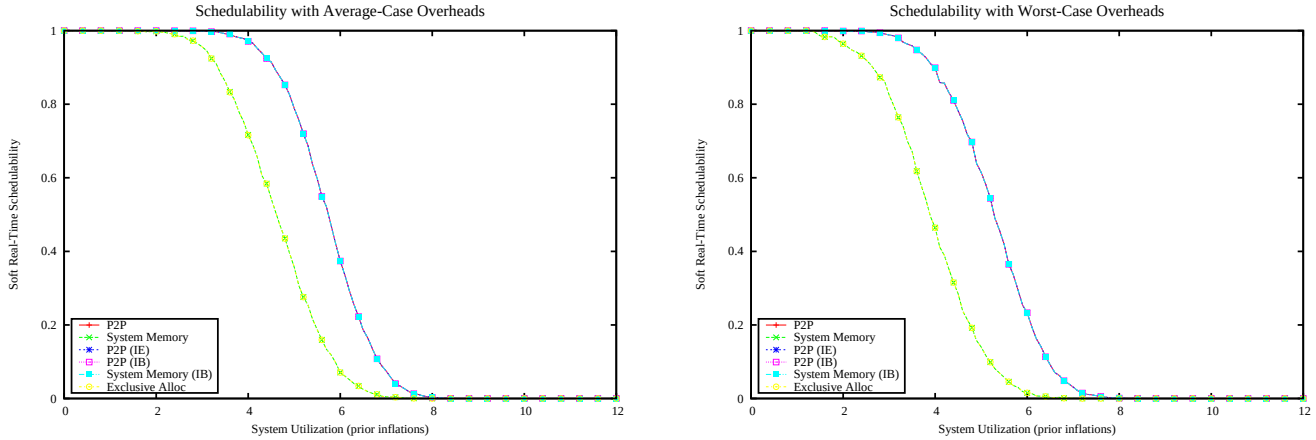

Figure 1600: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

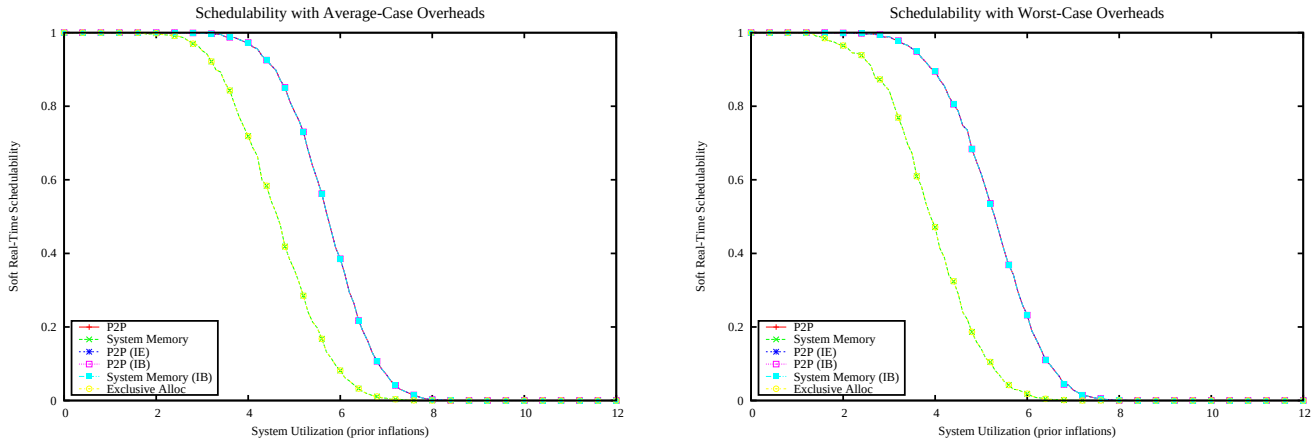

Figure 1601: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

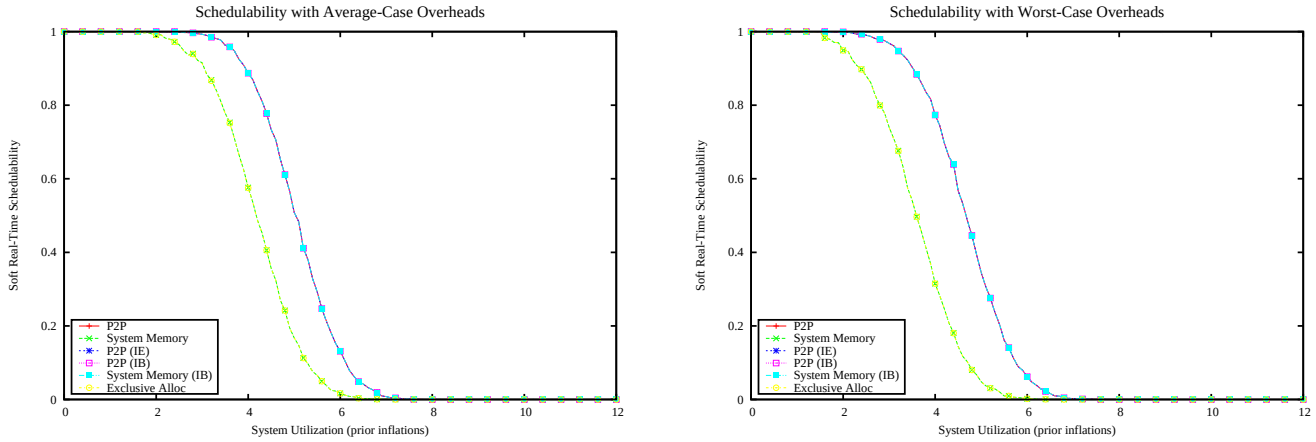

Figure 1602: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

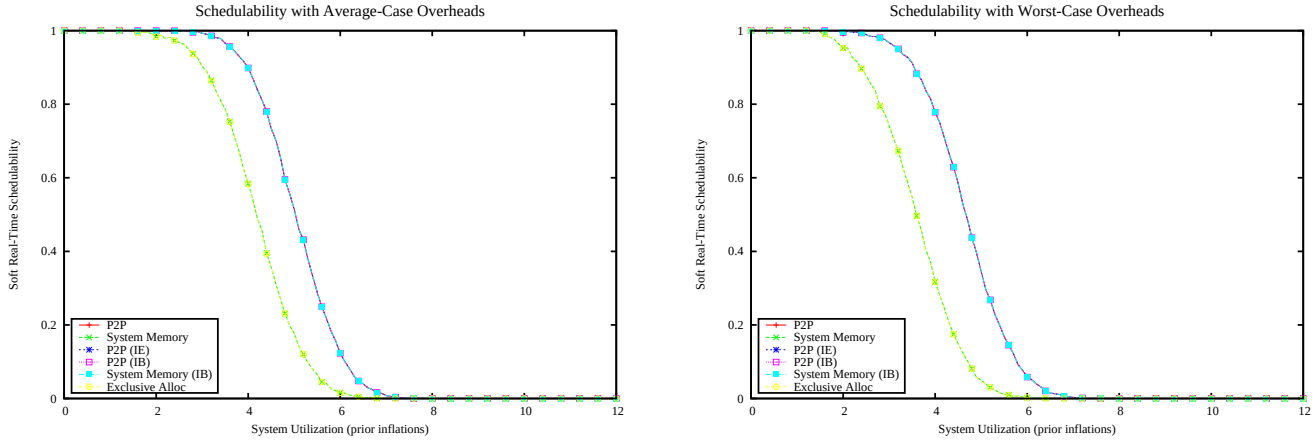

Figure 1603: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

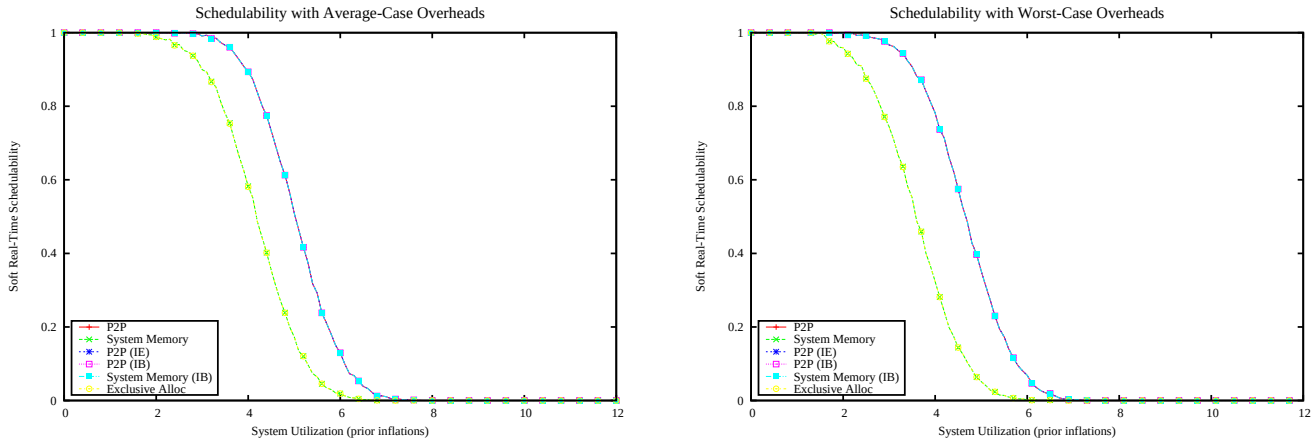

Figure 1604: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

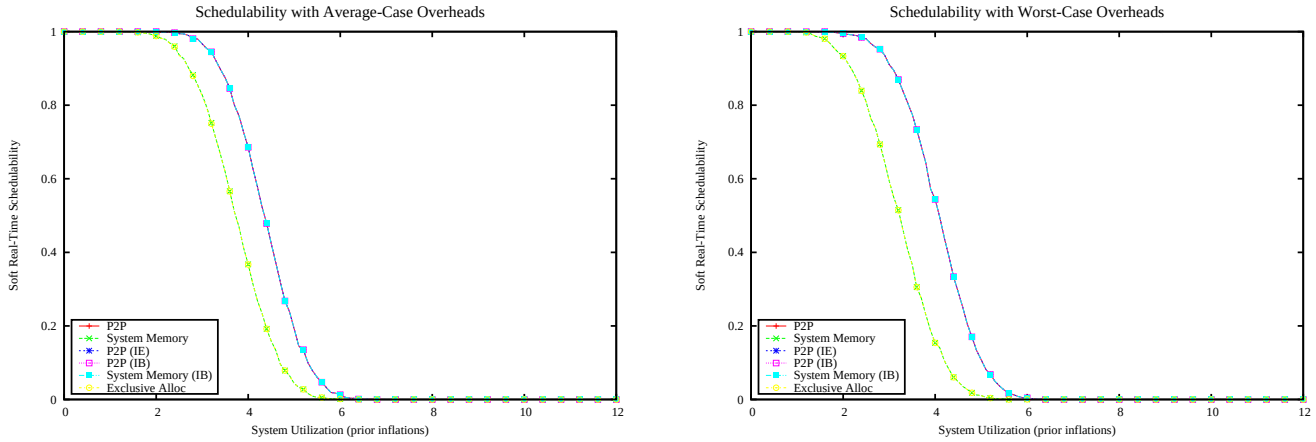

Figure 1605: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

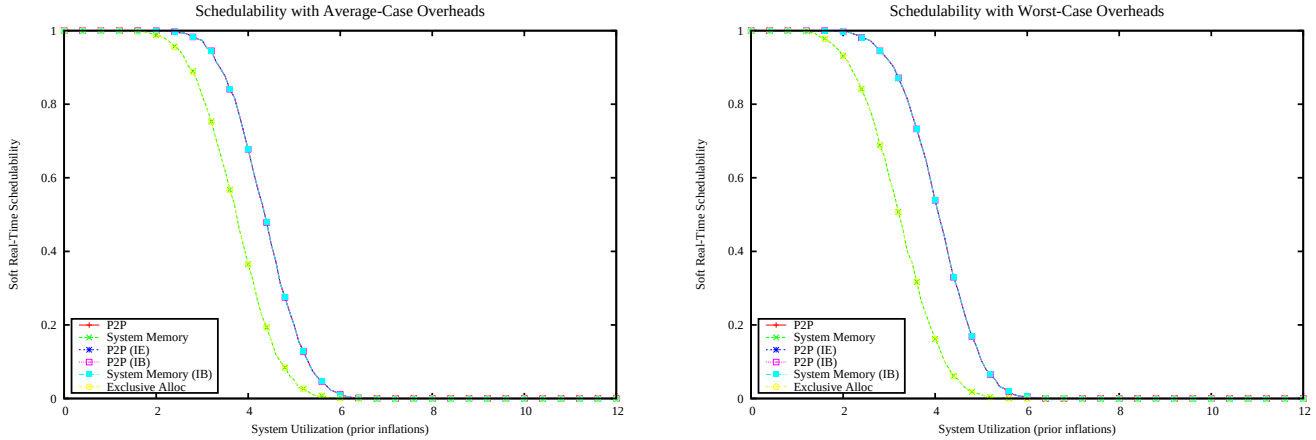

Figure 1606: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

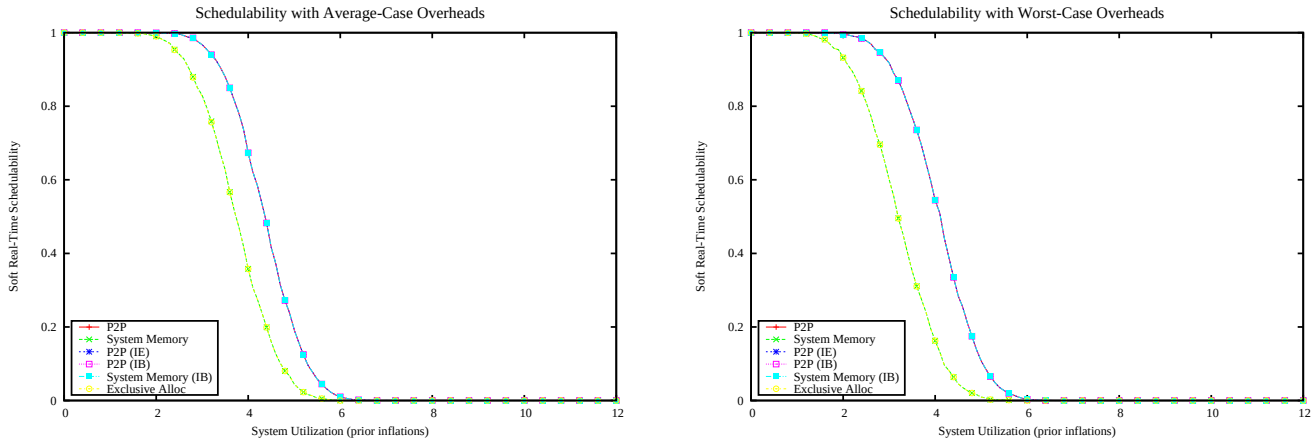

Figure 1607: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

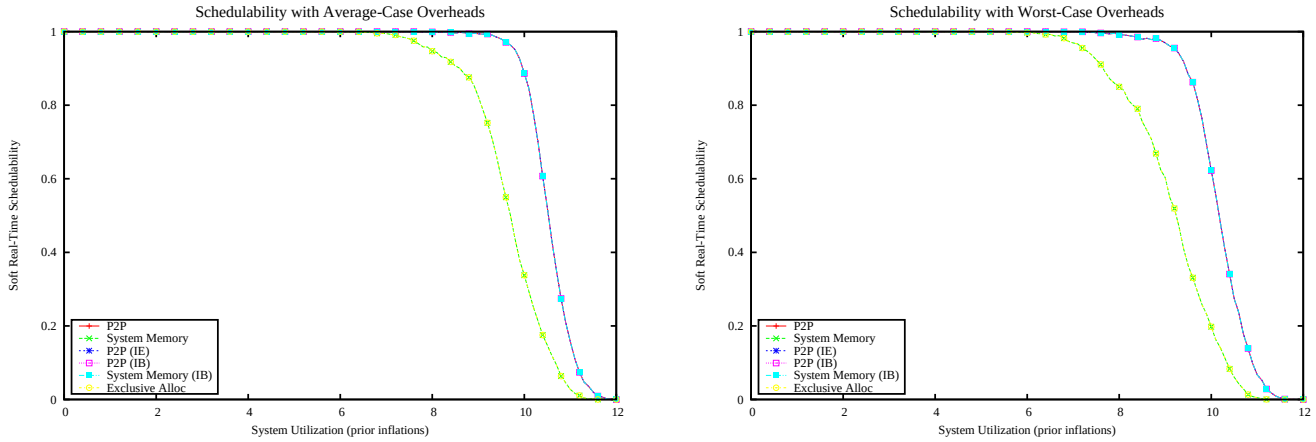

Figure 1608: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

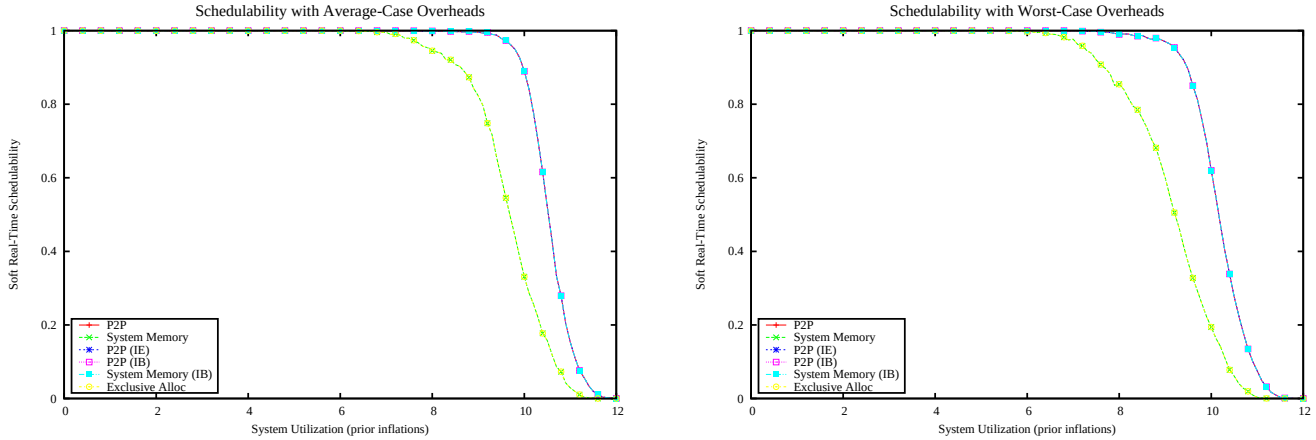

Figure 1609: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

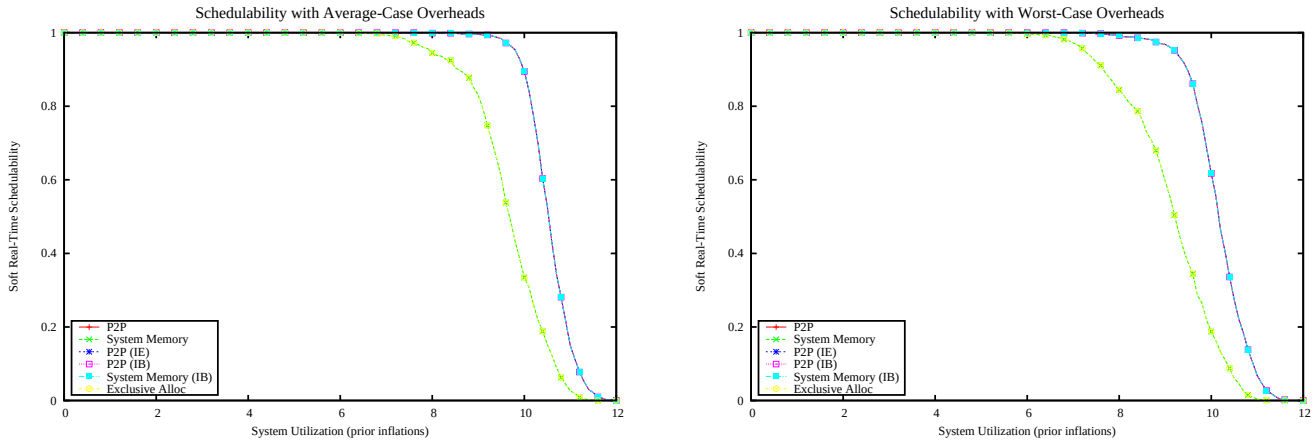

Figure 1610: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

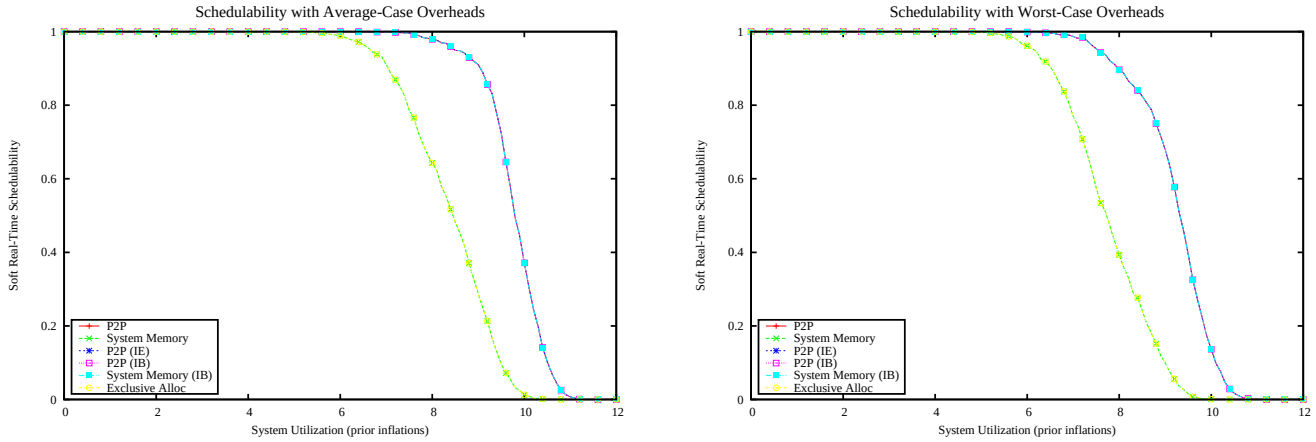

Figure 1611: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

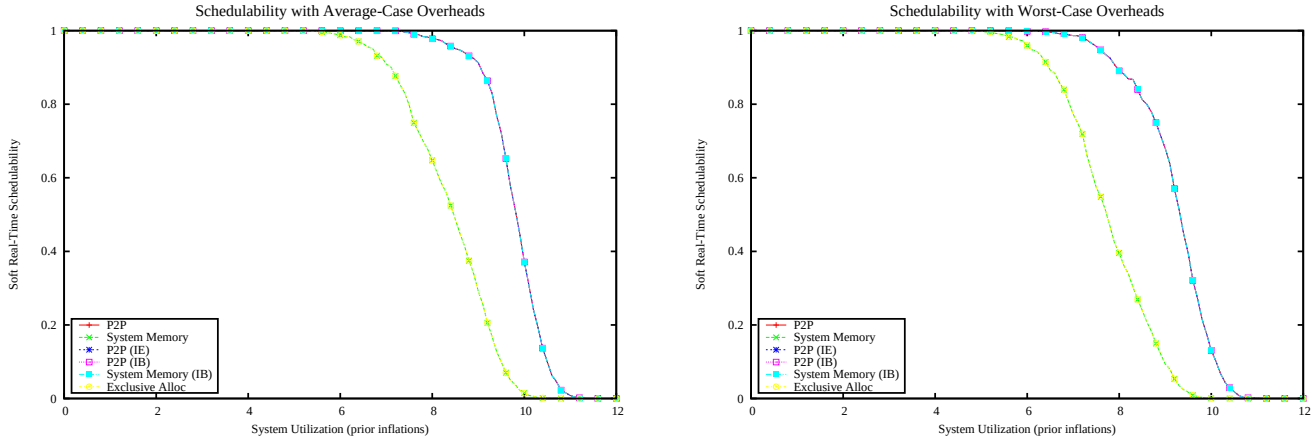

Figure 1612: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

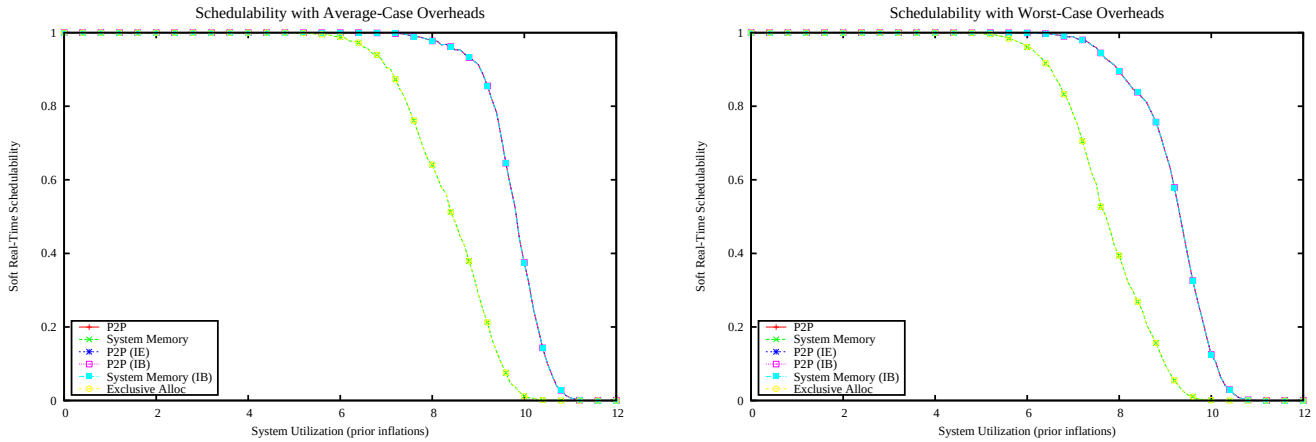

Figure 1613: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

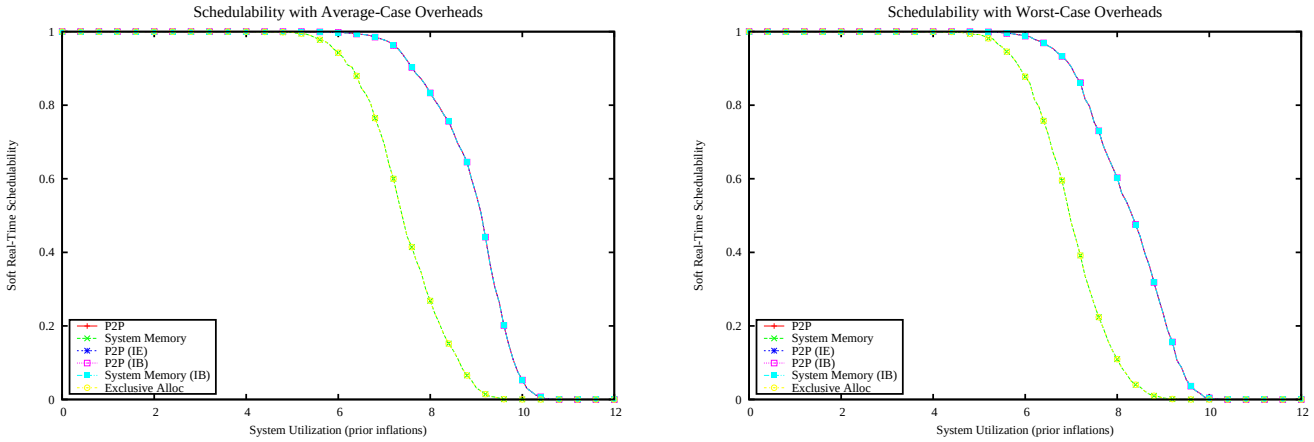

Figure 1614: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

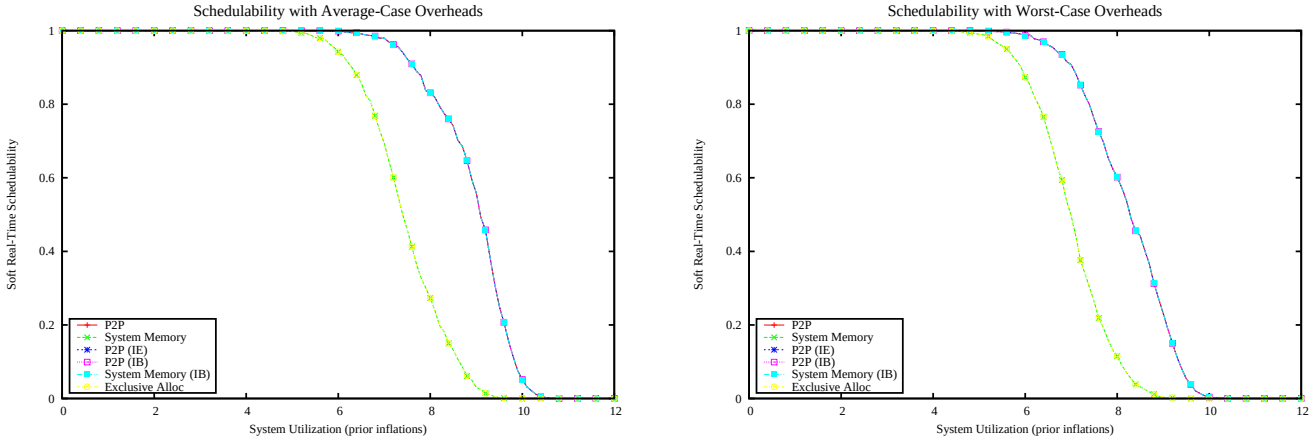

Figure 1615: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

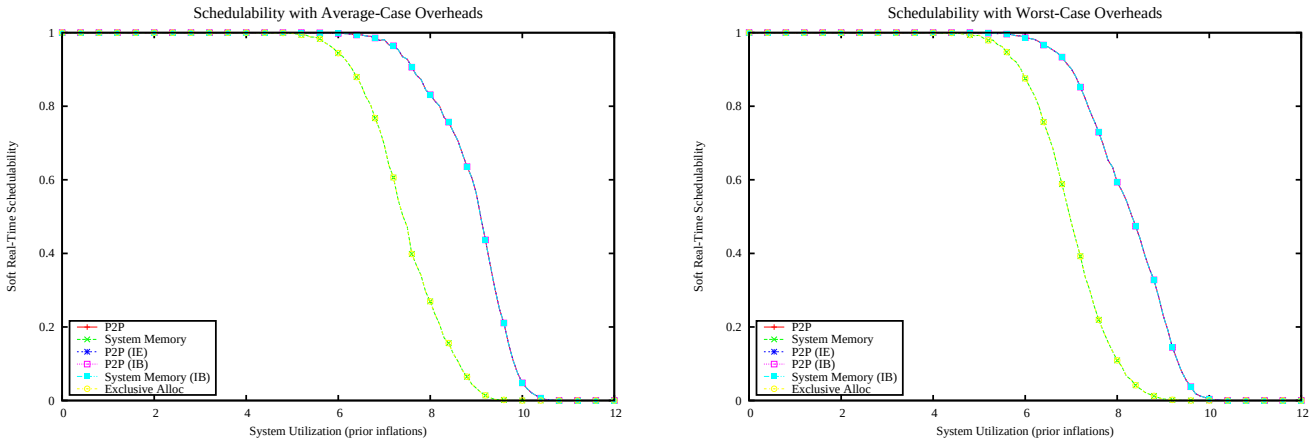

Figure 1616: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

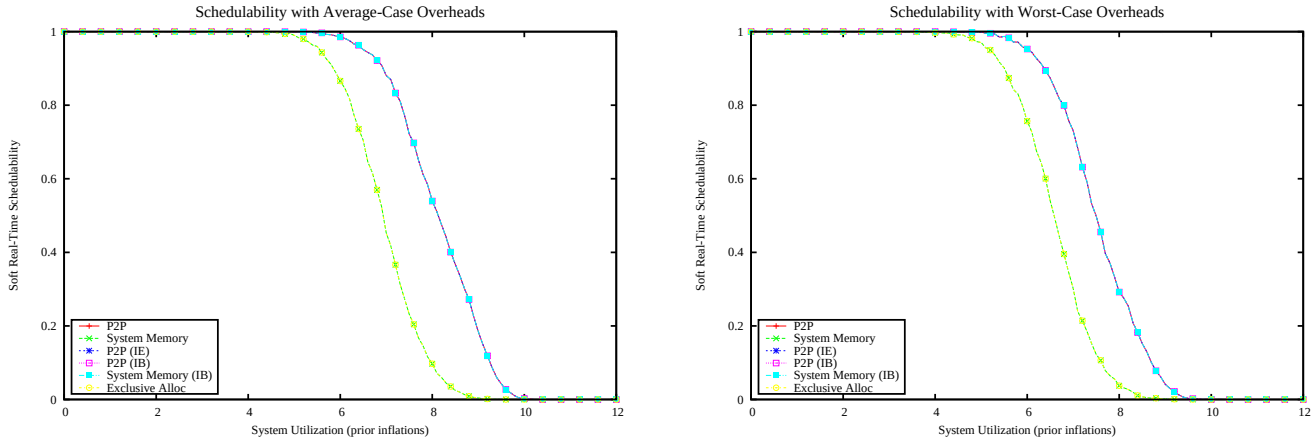

Figure 1617: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

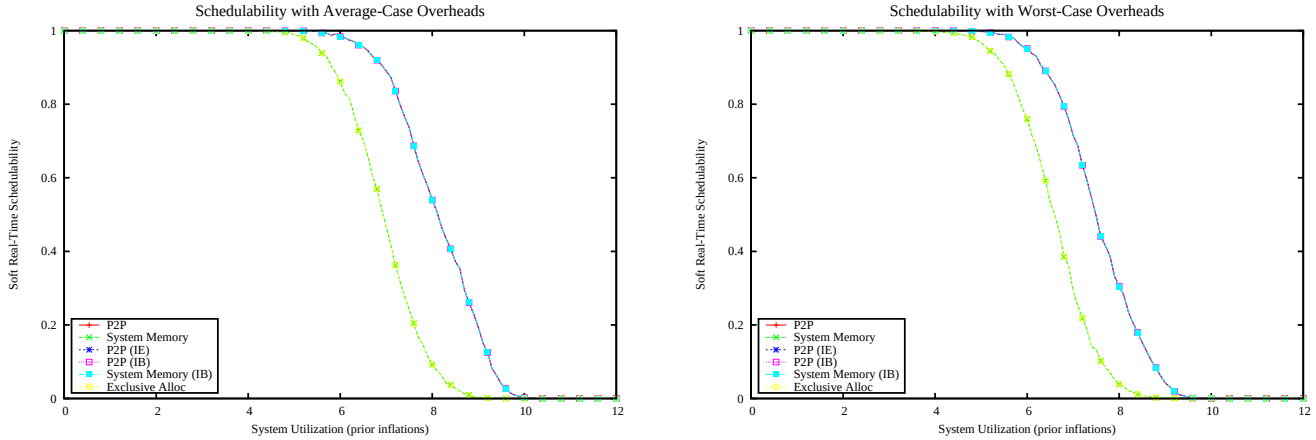

Figure 1618: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

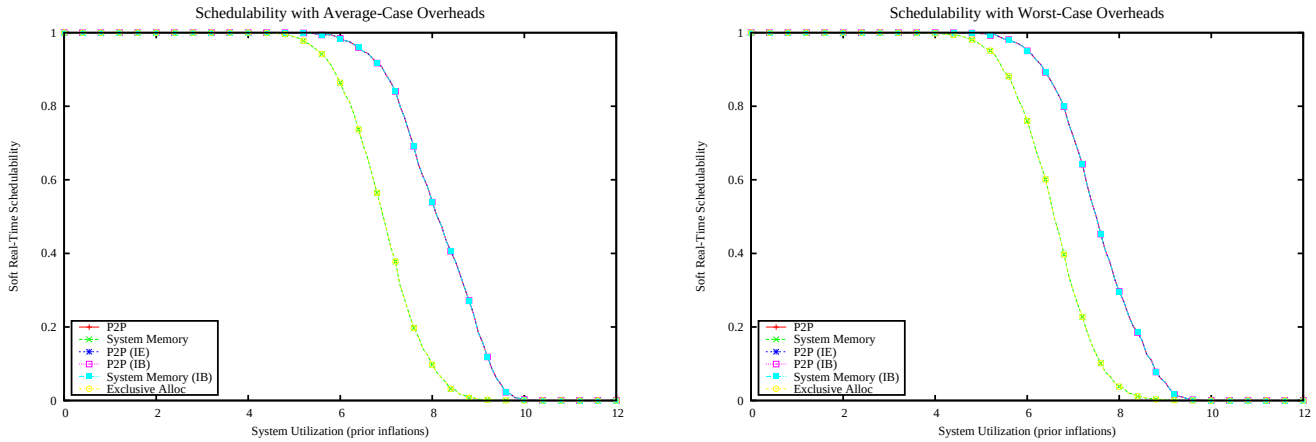

Figure 1619: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

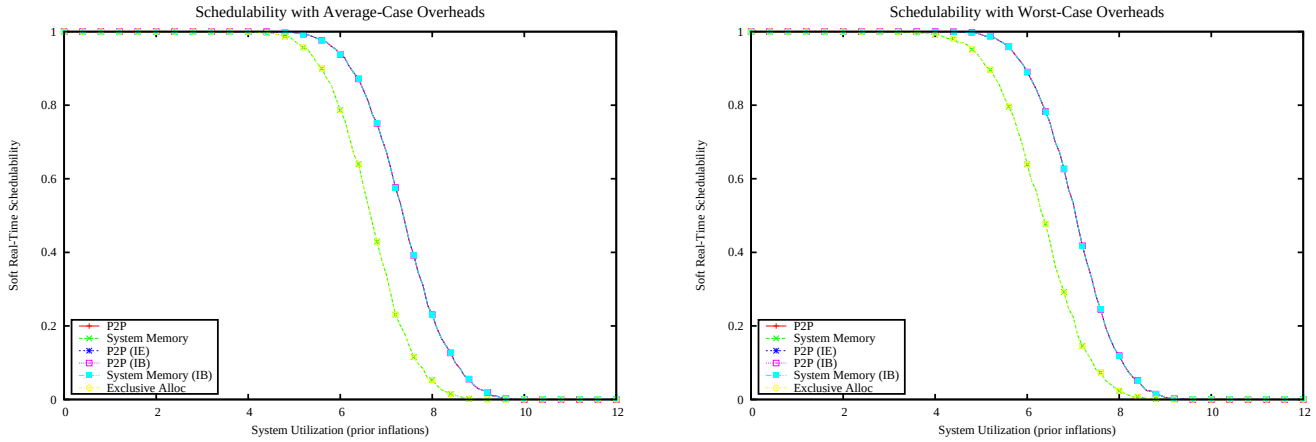

Figure 1620: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

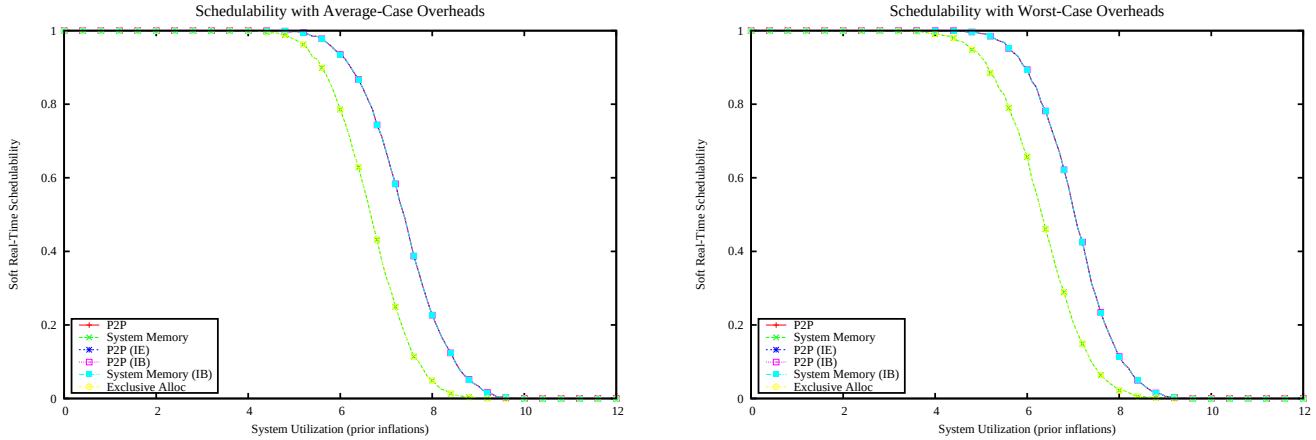

Figure 1621: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

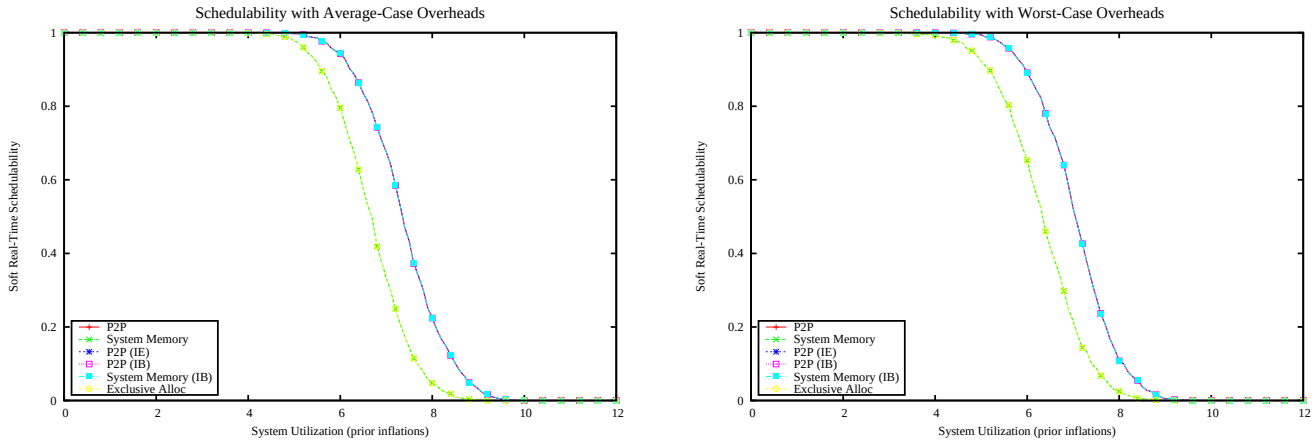

Figure 1622: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

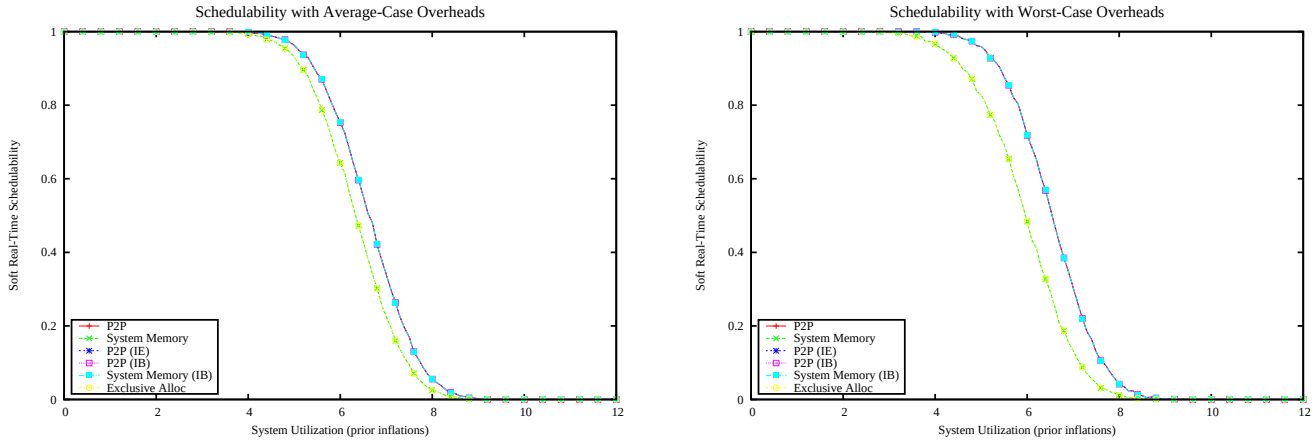

Figure 1623: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

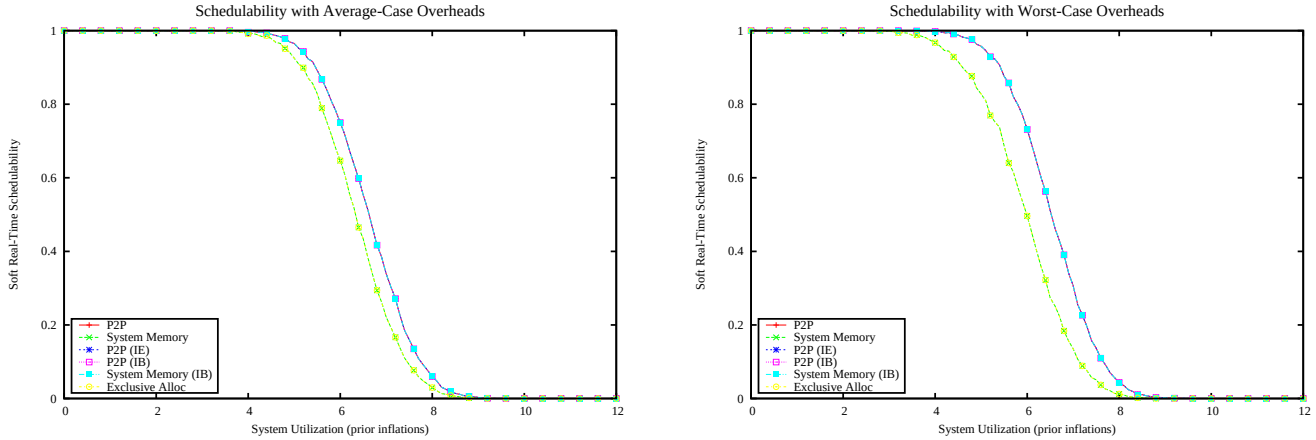

Figure 1624: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

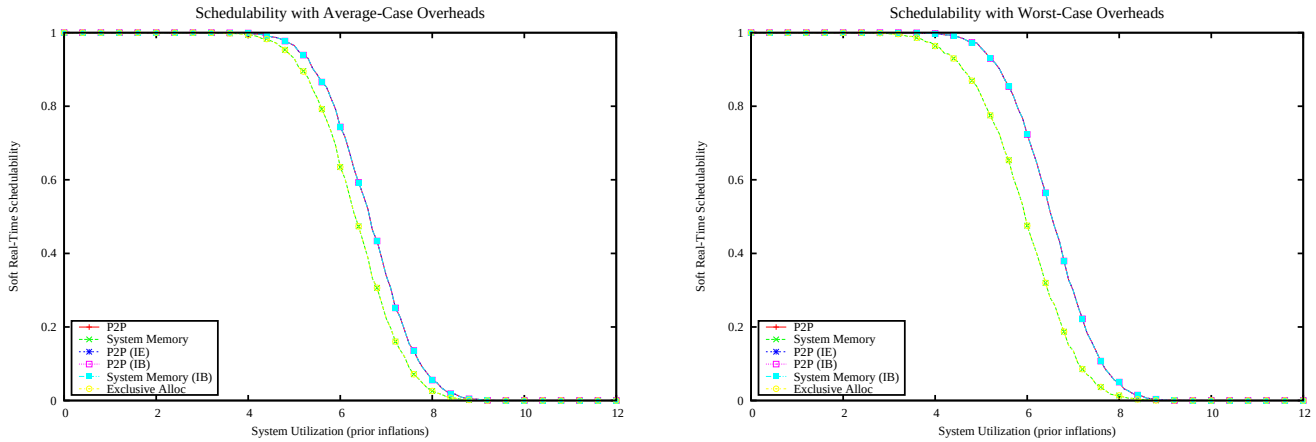

Figure 1625: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

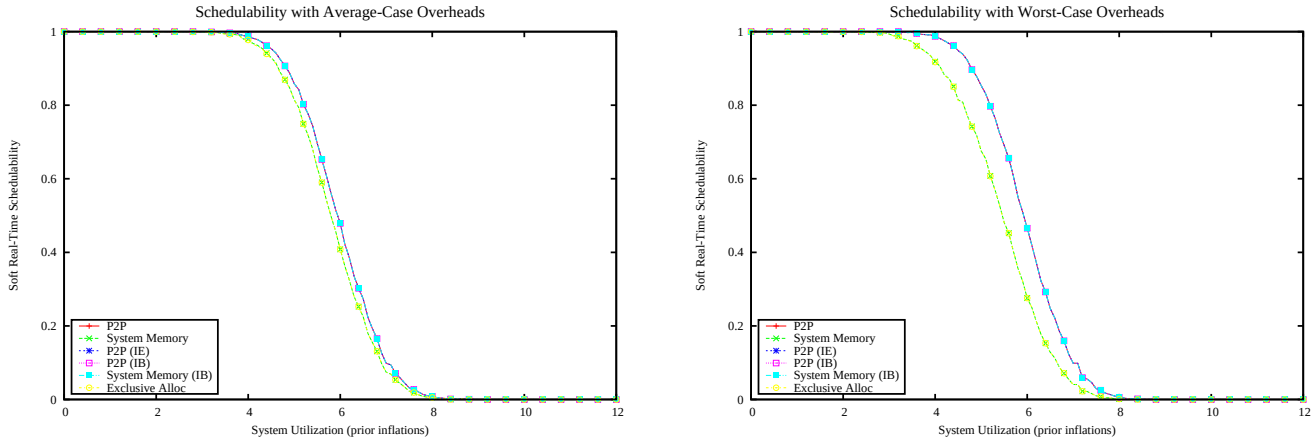

Figure 1626: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

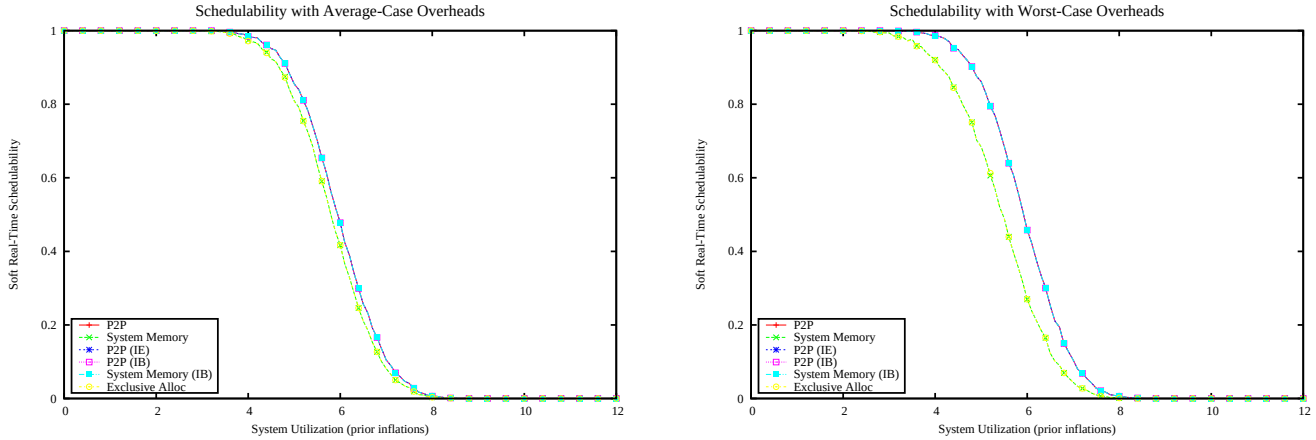

Figure 1627: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

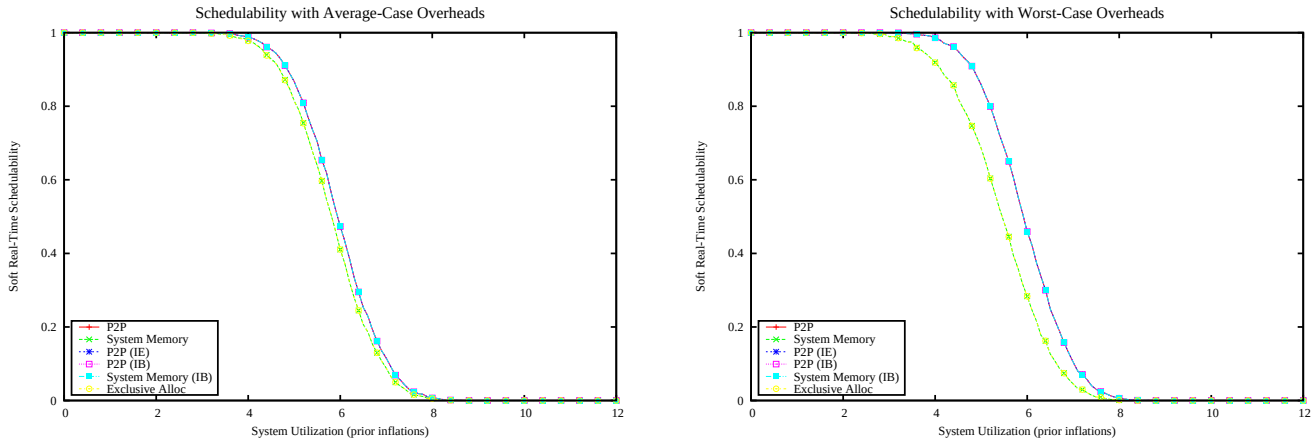

Figure 1628: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

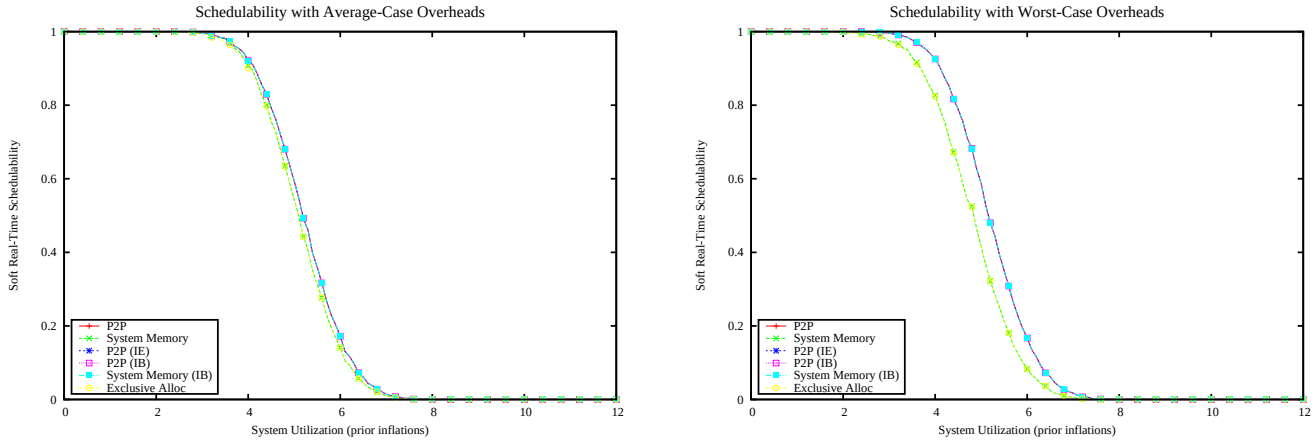

Figure 1629: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

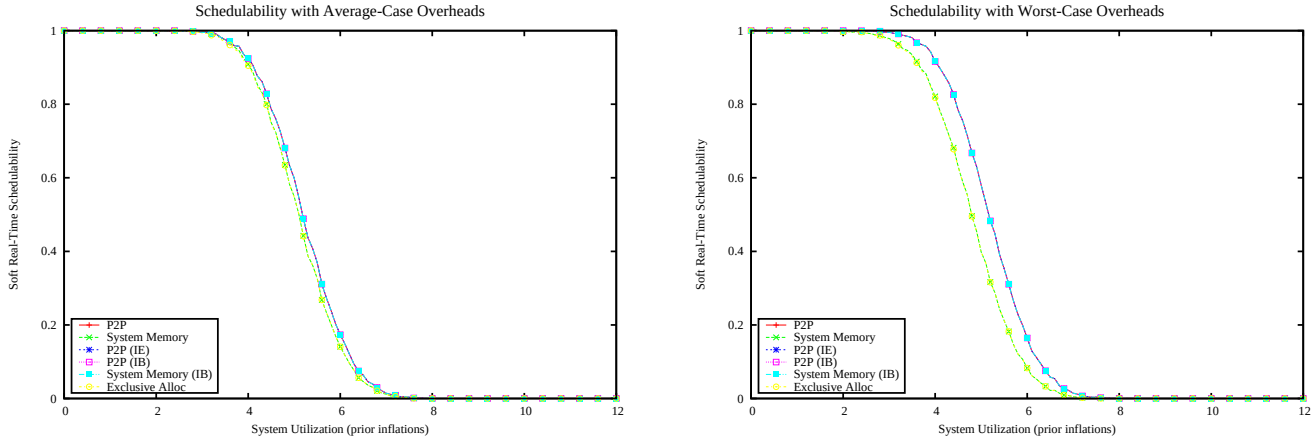

Figure 1630: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

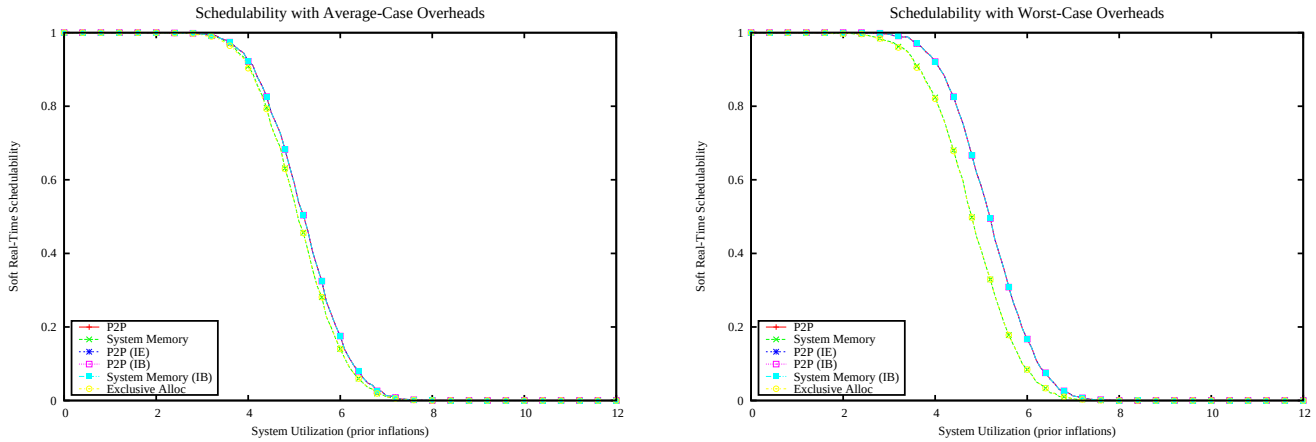

Figure 1631: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

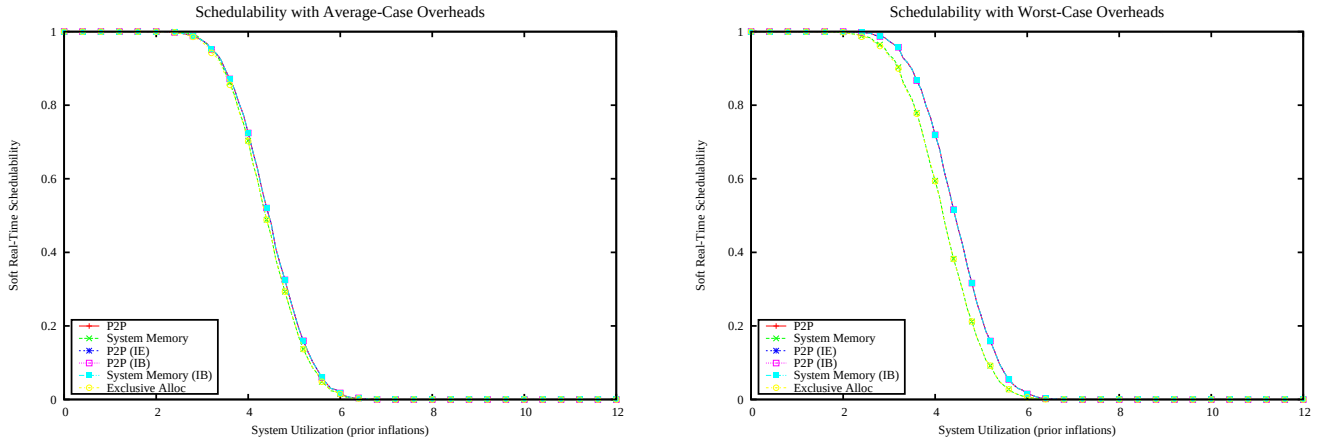

Figure 1632: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

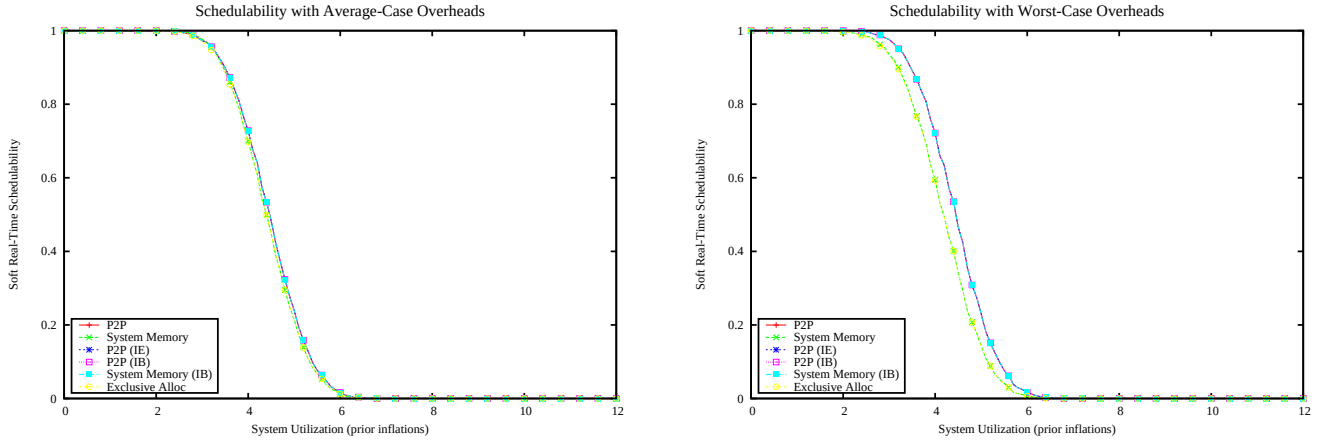

Figure 1633: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

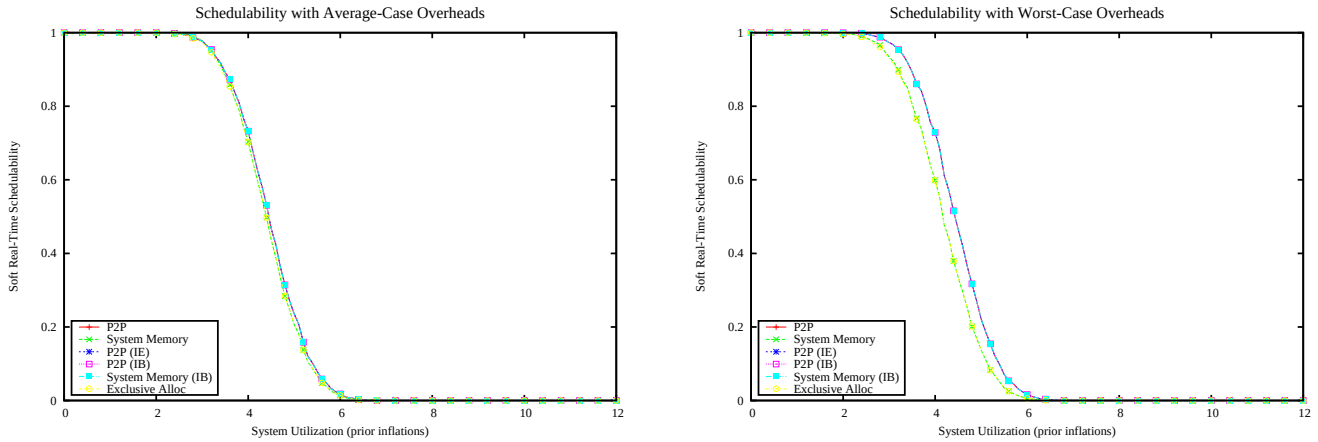

Figure 1634: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

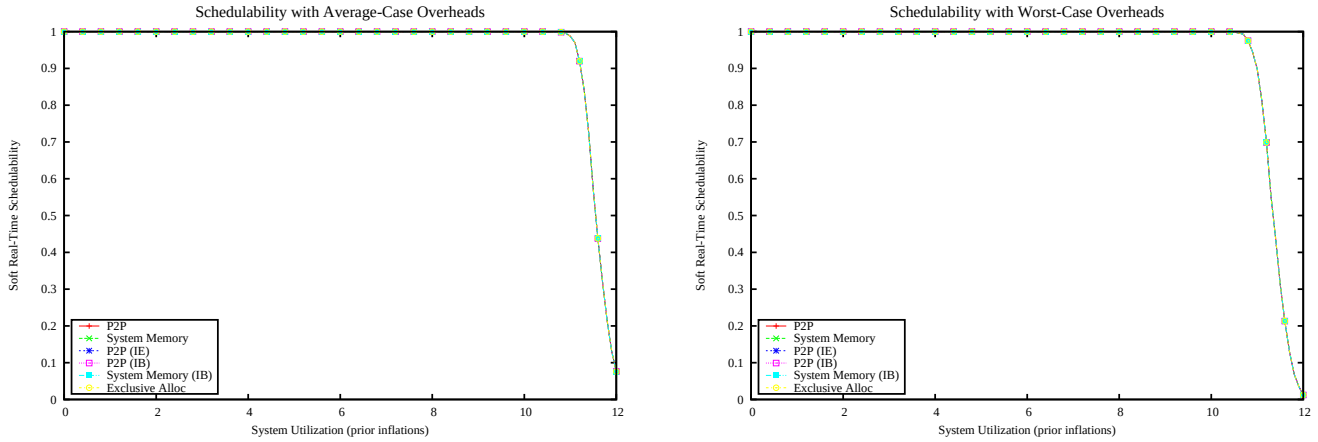

Figure 1635: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

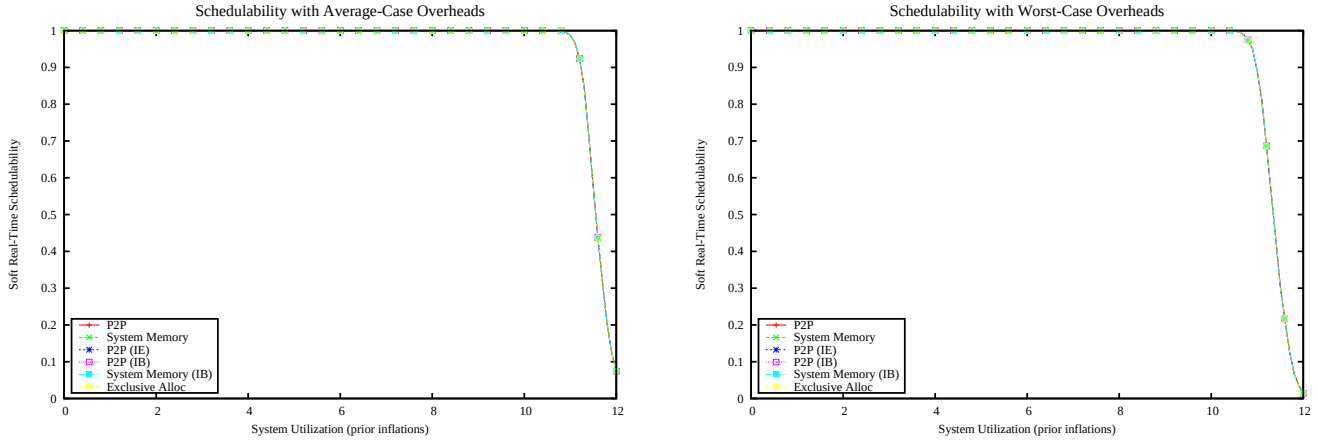

Figure 1636: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

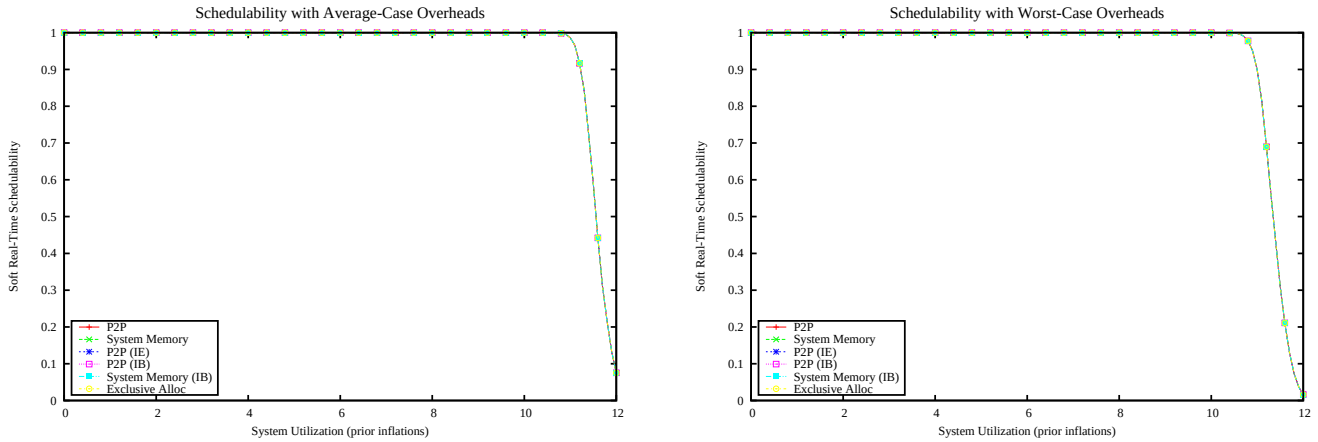

Figure 1637: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

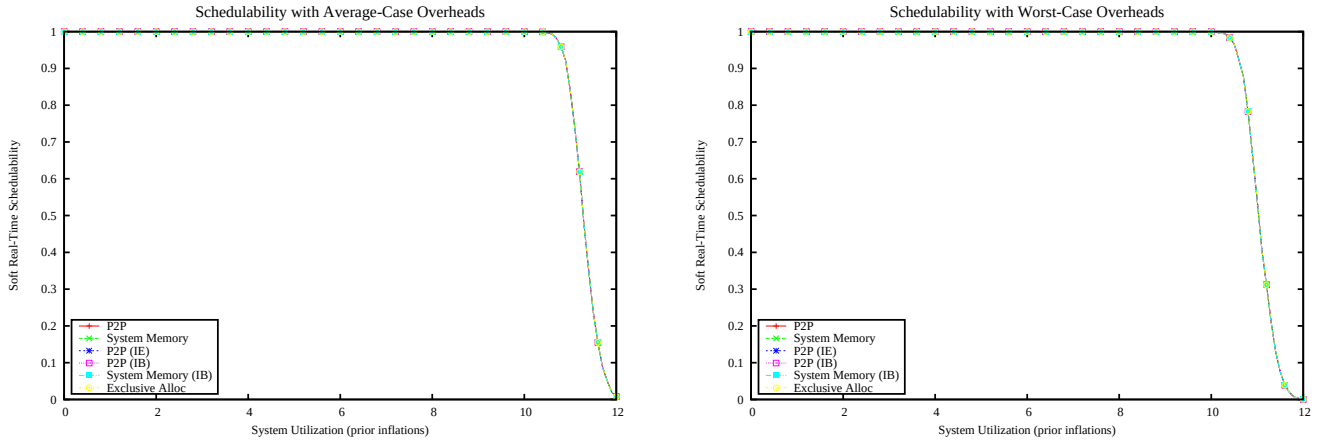

Figure 1638: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

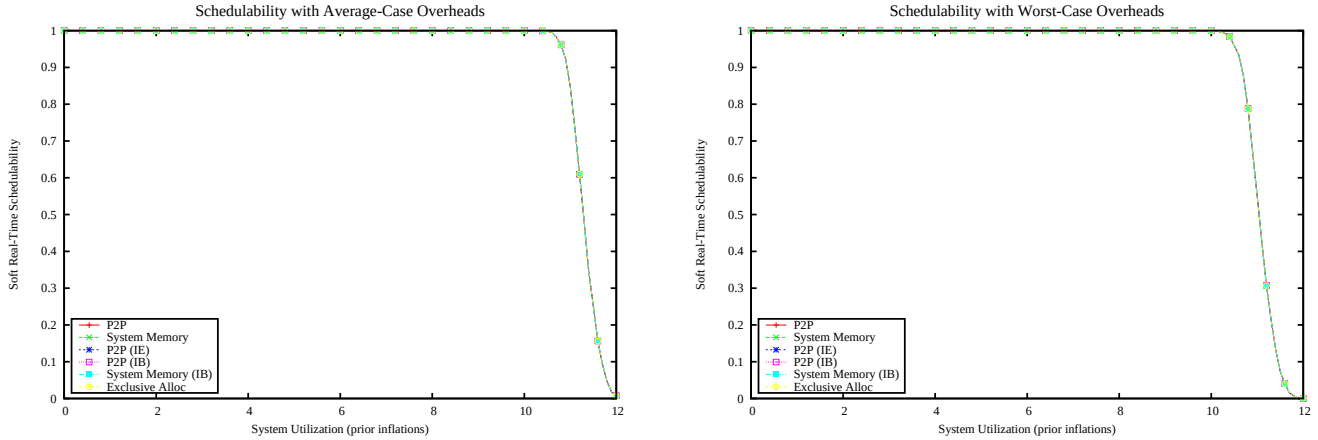

Figure 1639: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

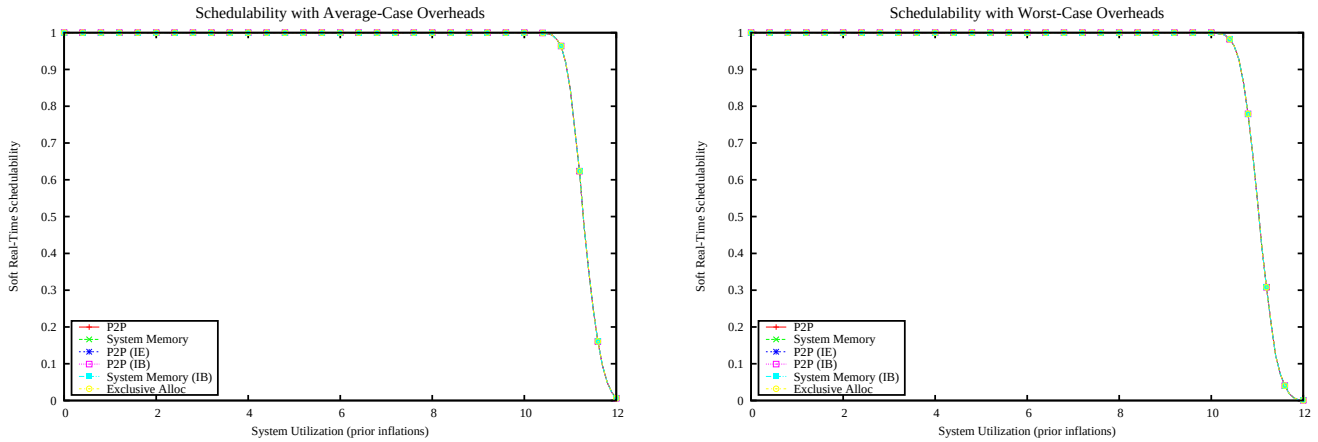

Figure 1640: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

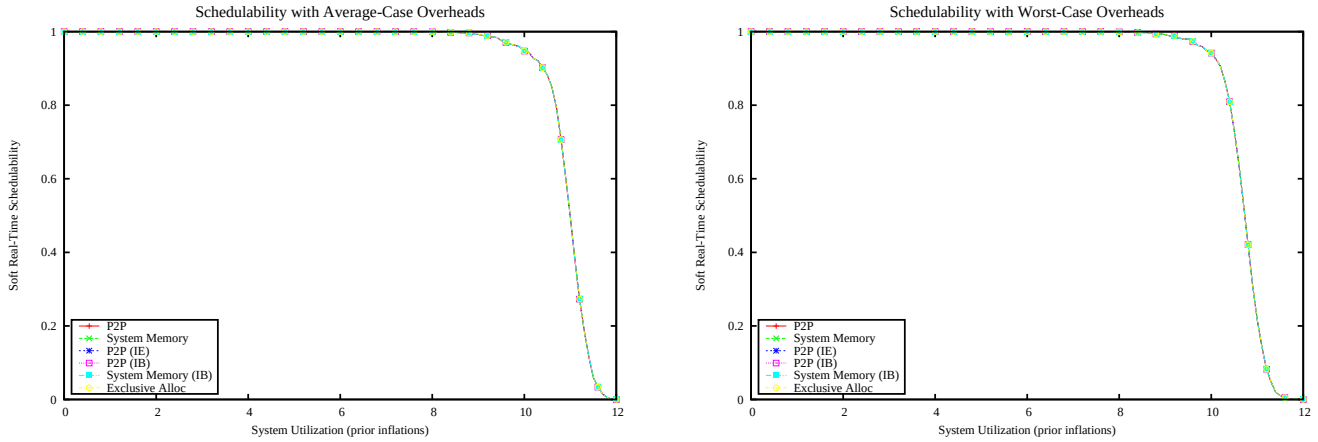

Figure 1641: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

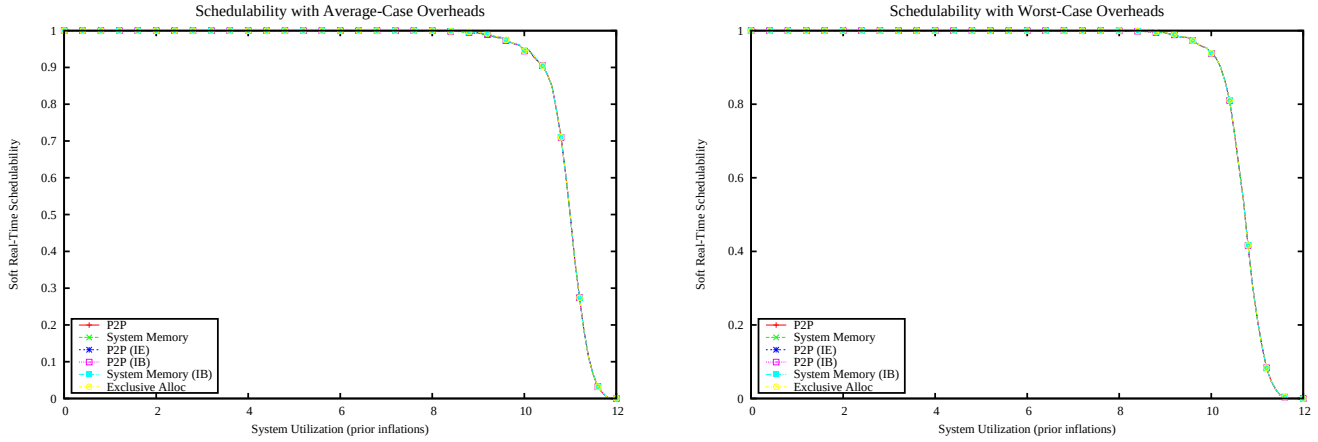

Figure 1642: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

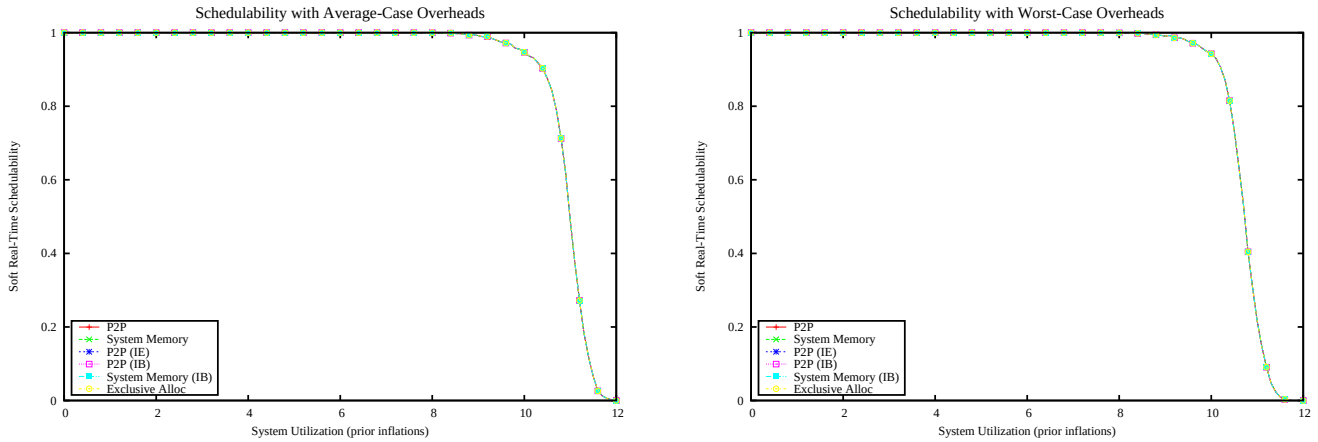

Figure 1643: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

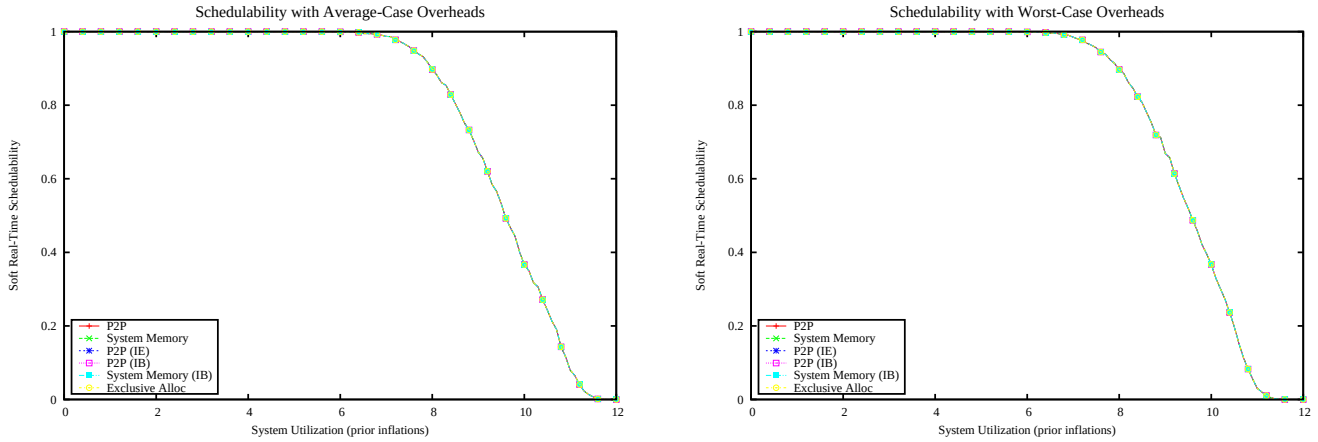

Figure 1644: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

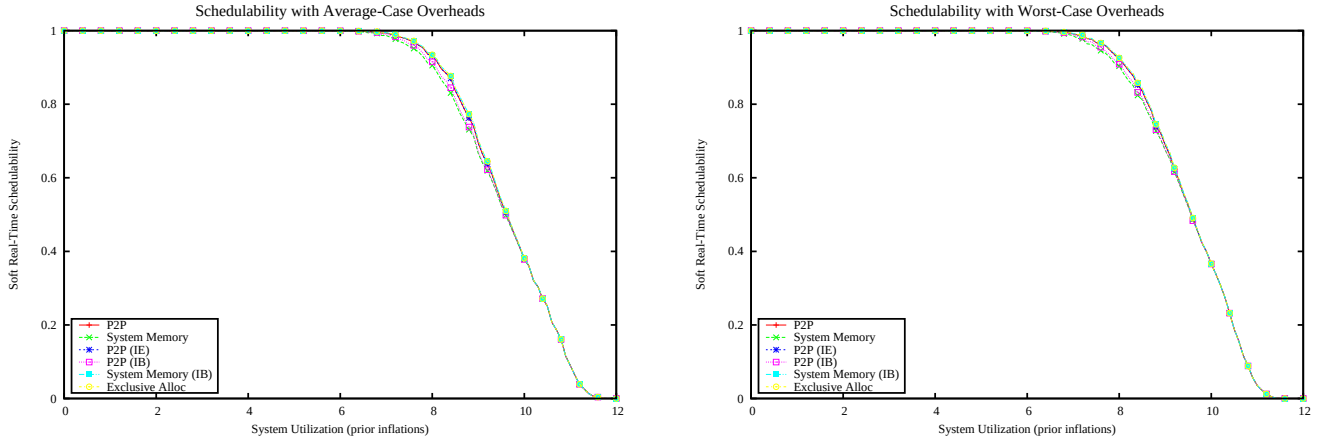

Figure 1645: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

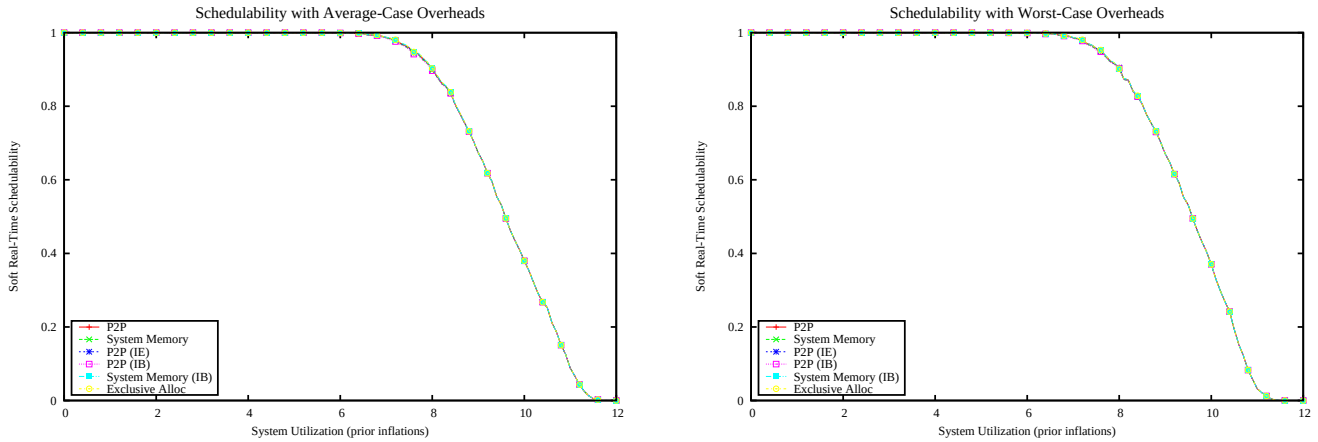

Figure 1646: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

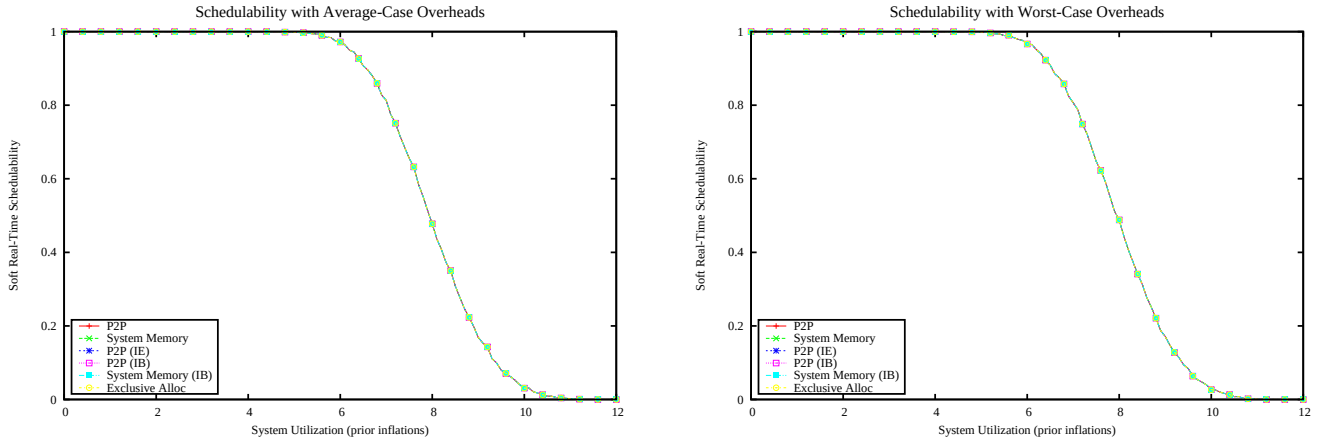

Figure 1647: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

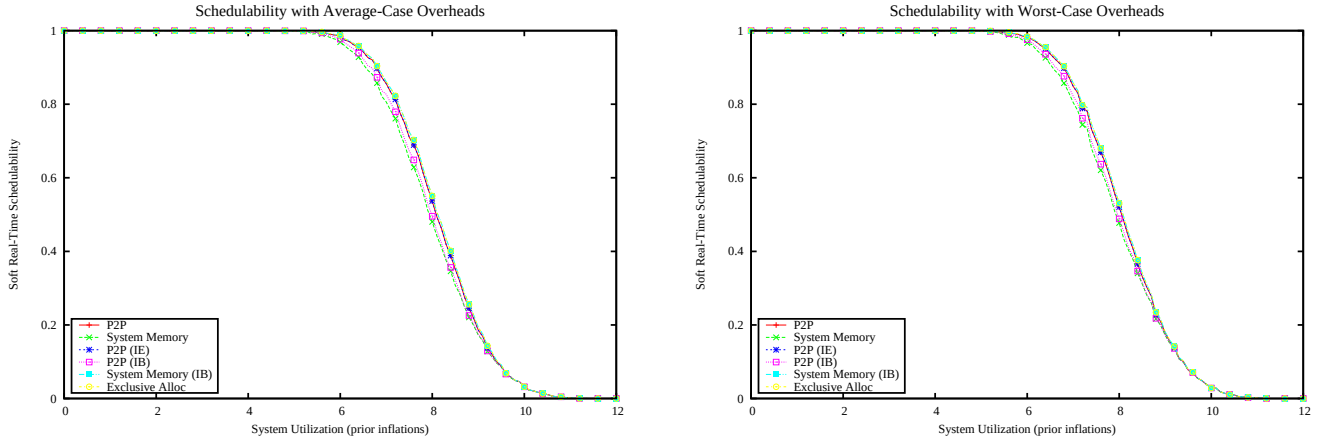

Figure 1648: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

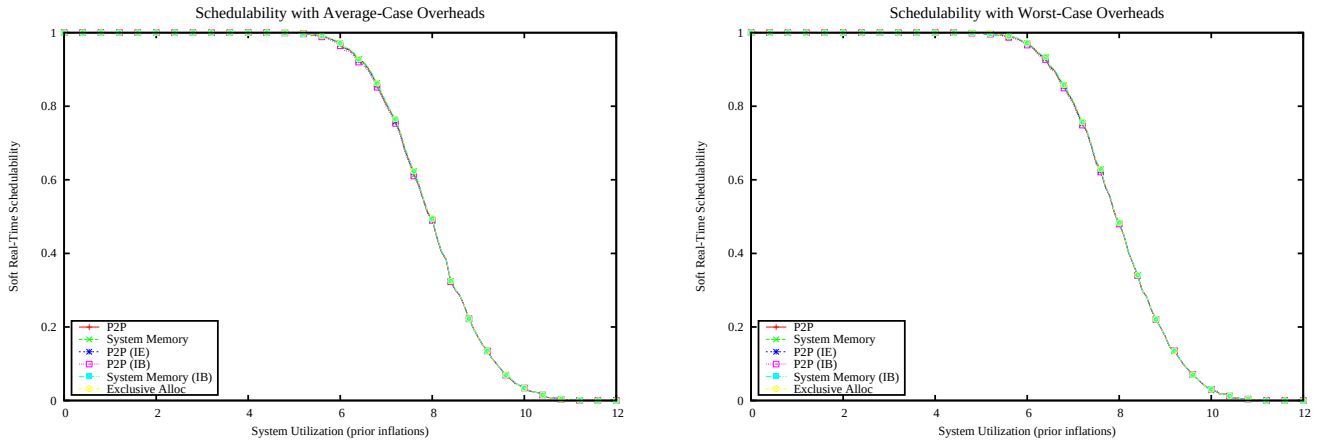

Figure 1649: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

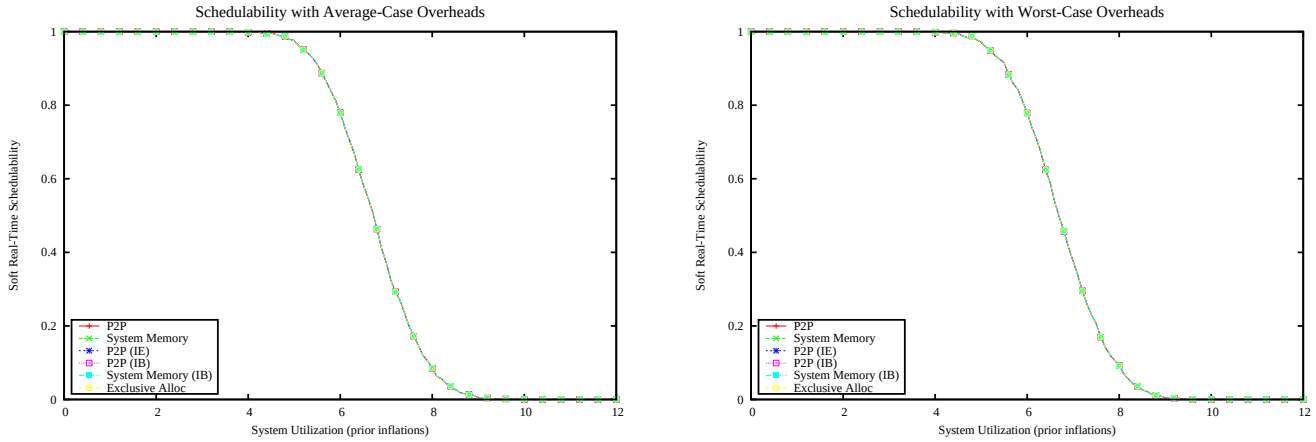

Figure 1650: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

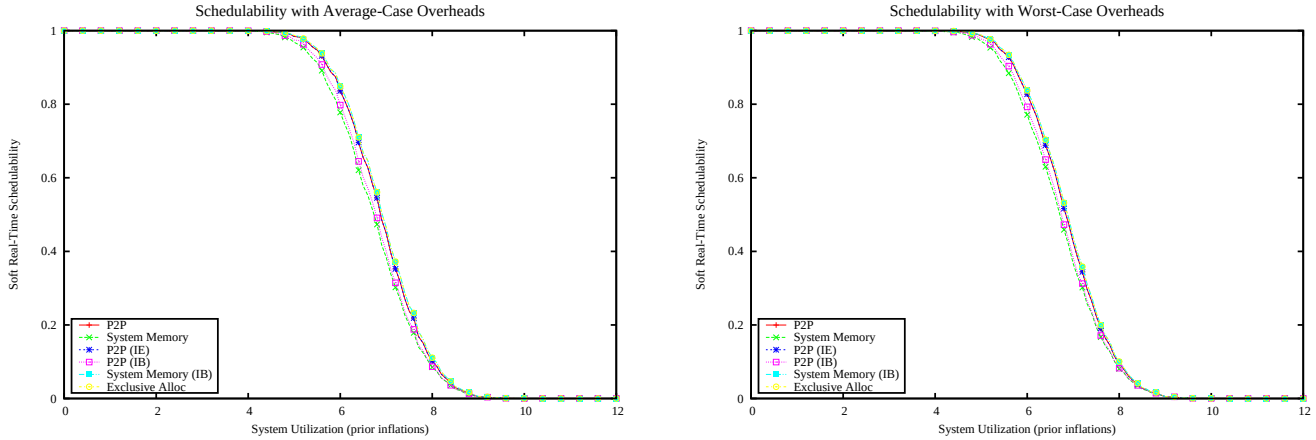

Figure 1651: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

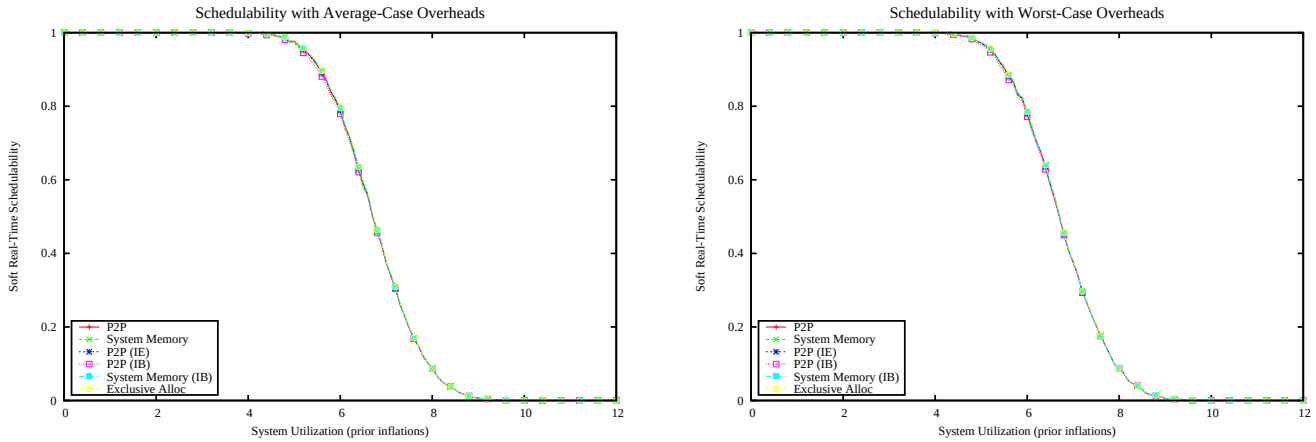

Figure 1652: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

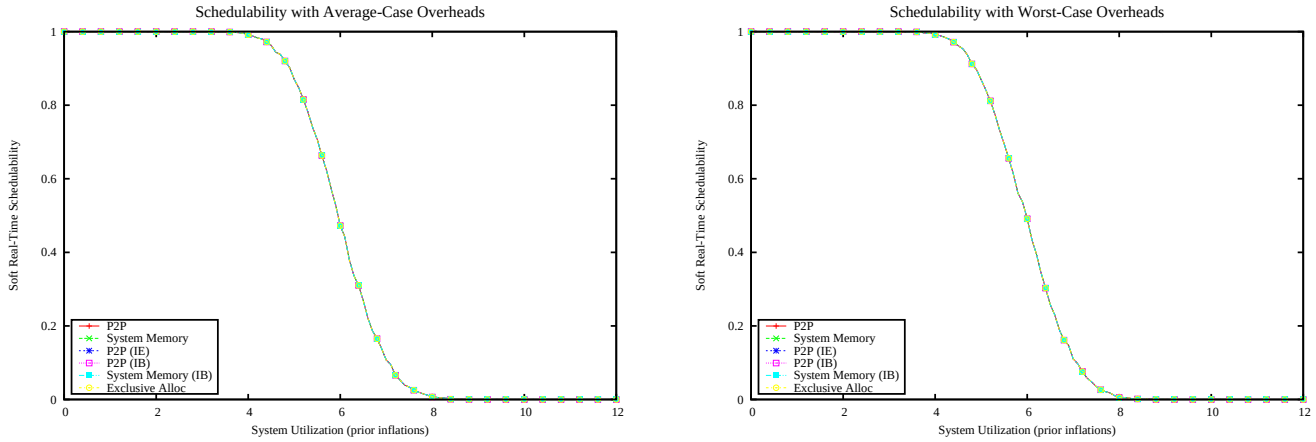

Figure 1653: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

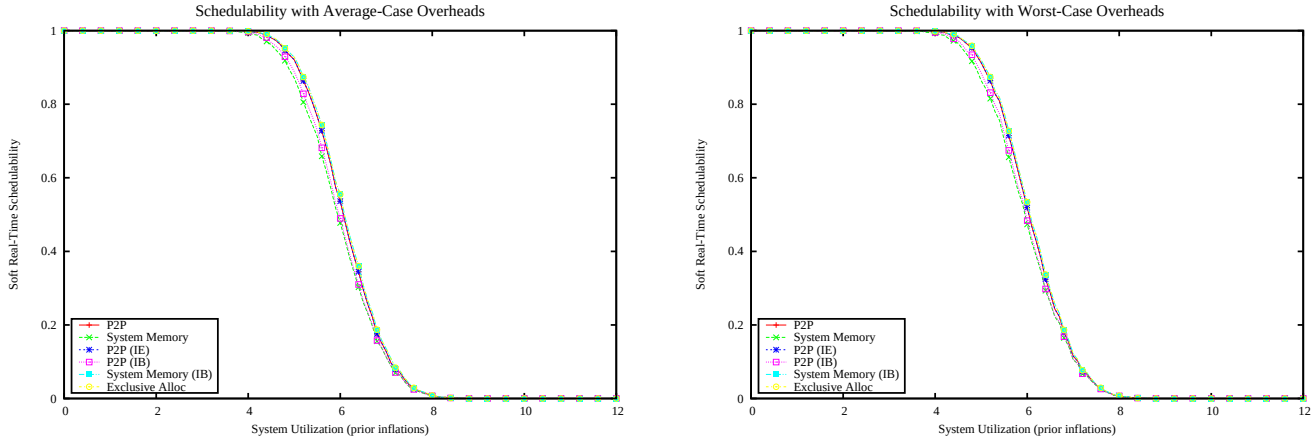

Figure 1654: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

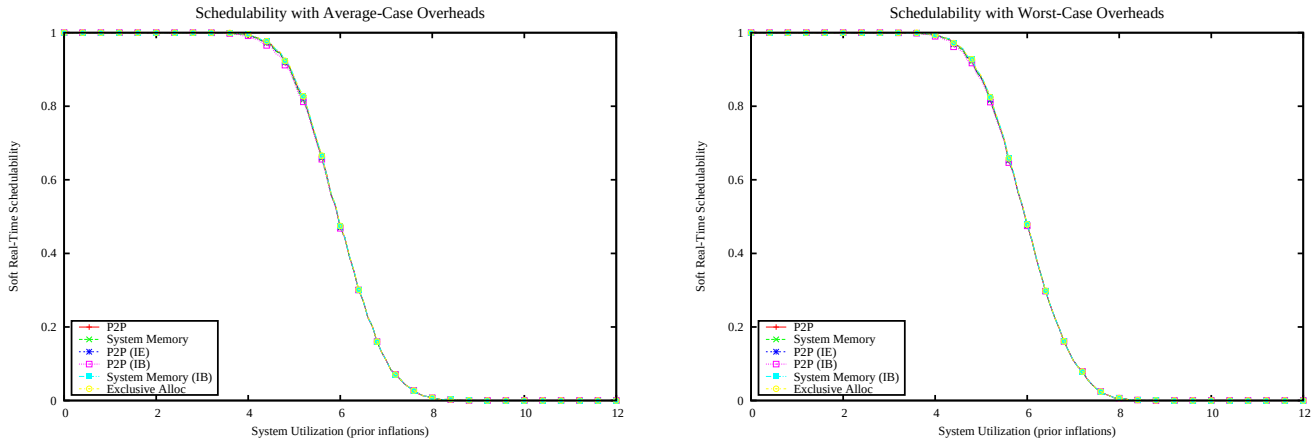

Figure 1655: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

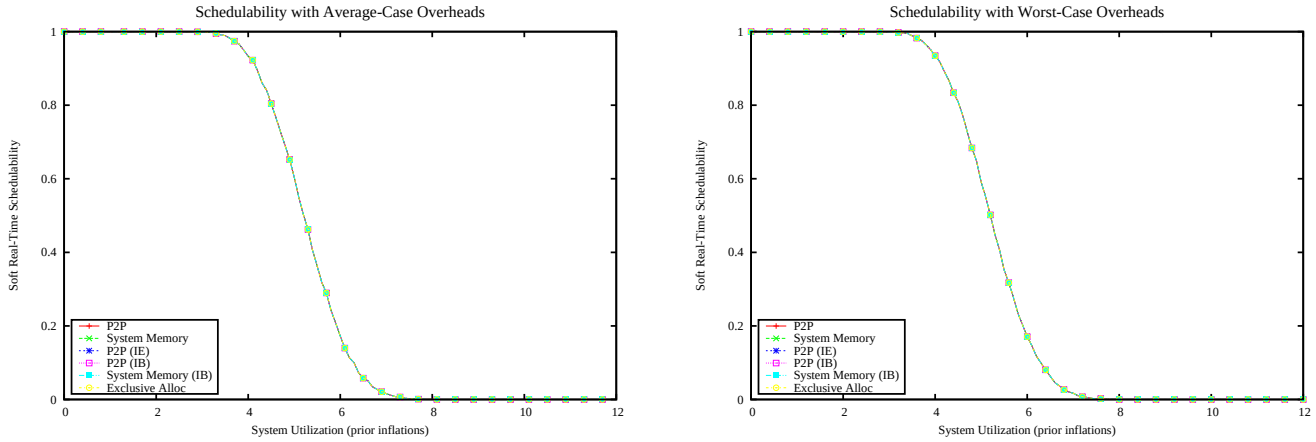

Figure 1656: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

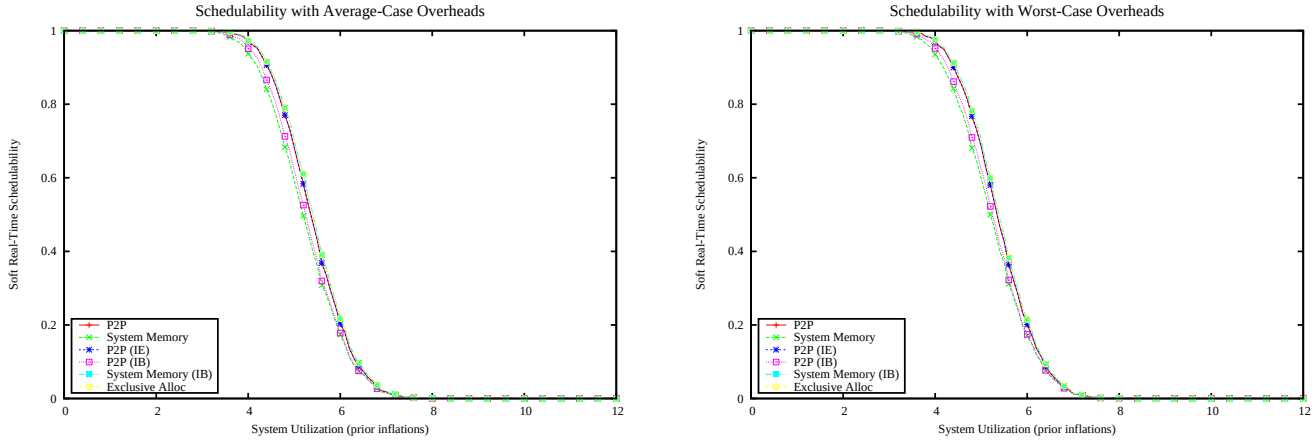

Figure 1657: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

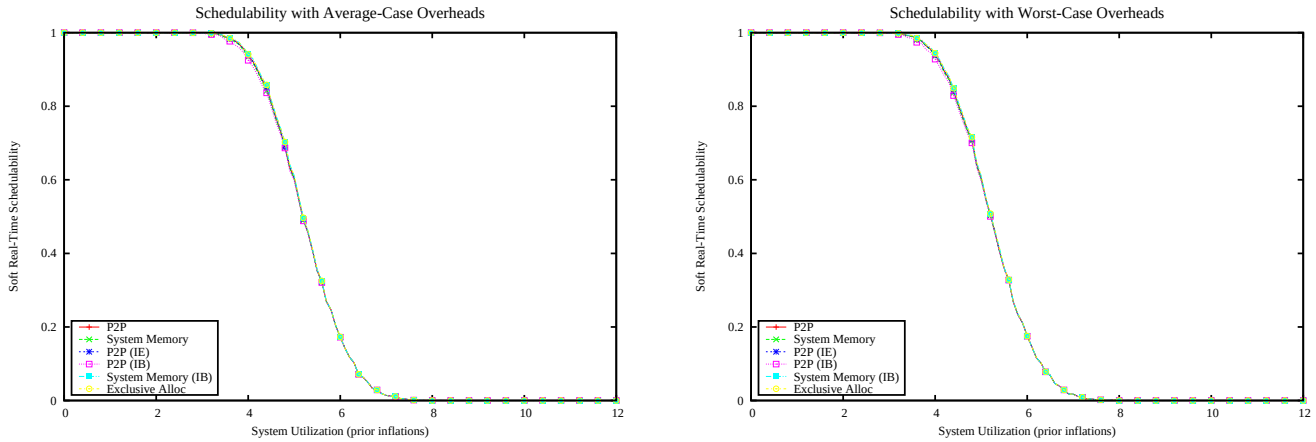

Figure 1658: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

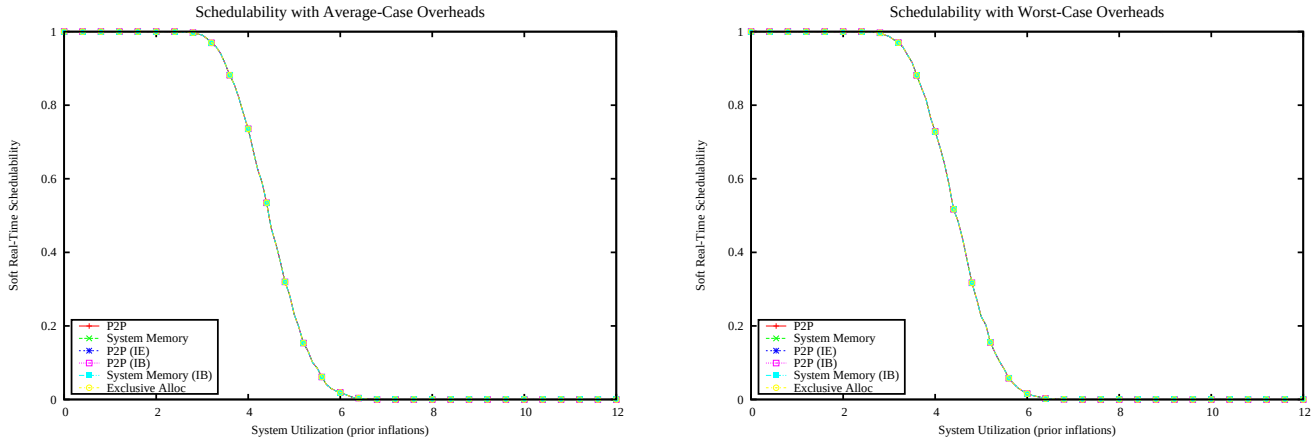

Figure 1659: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

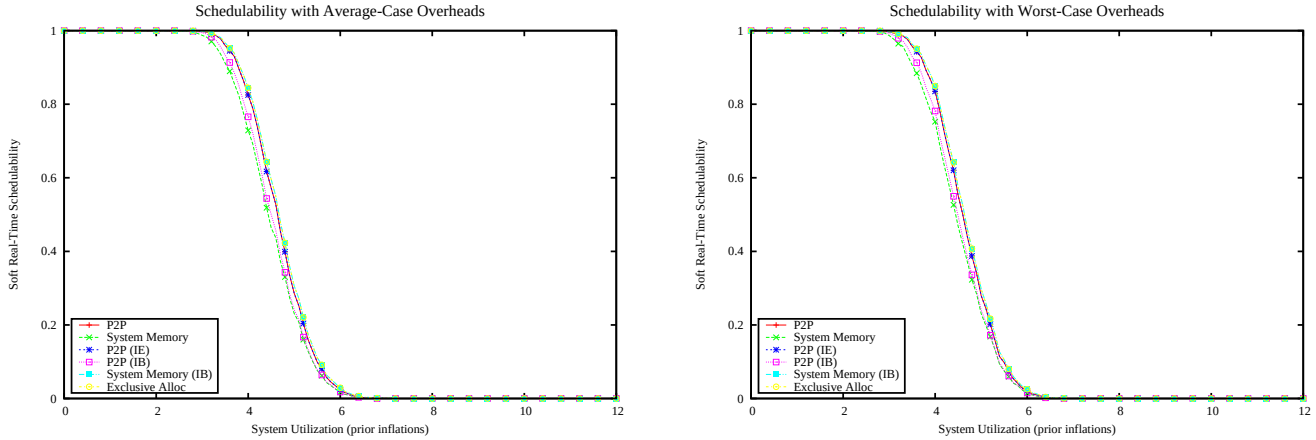

Figure 1660: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

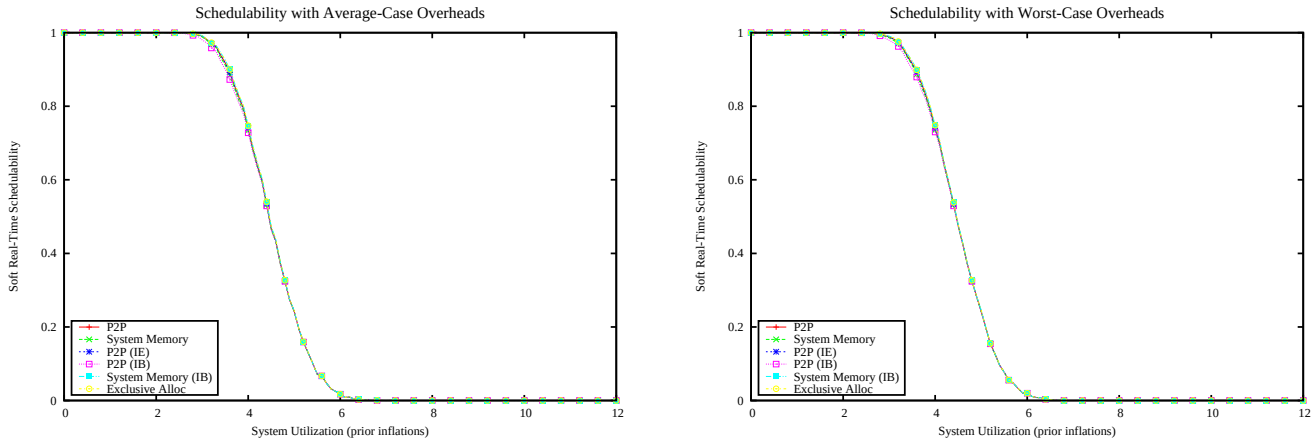

Figure 1661: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

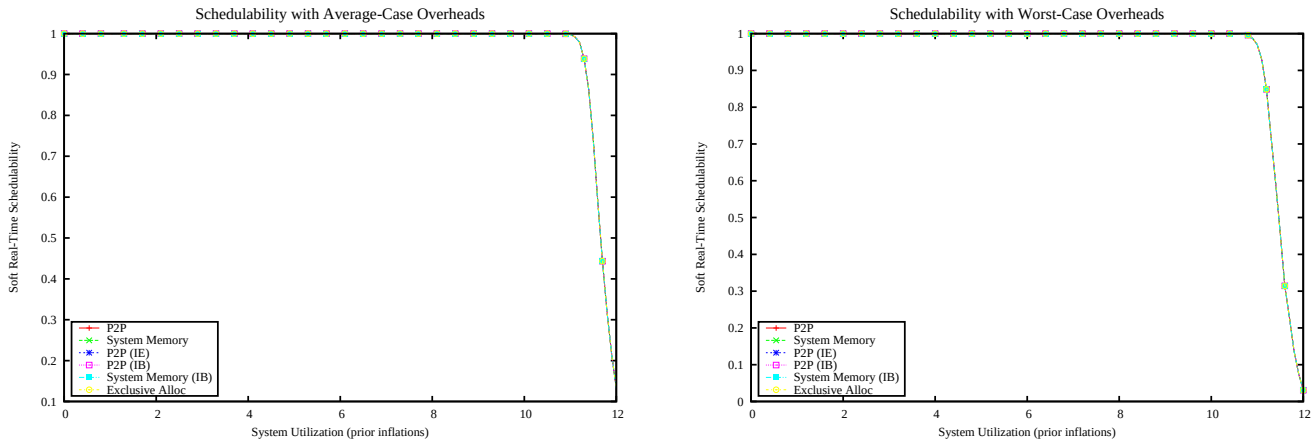

Figure 1662: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

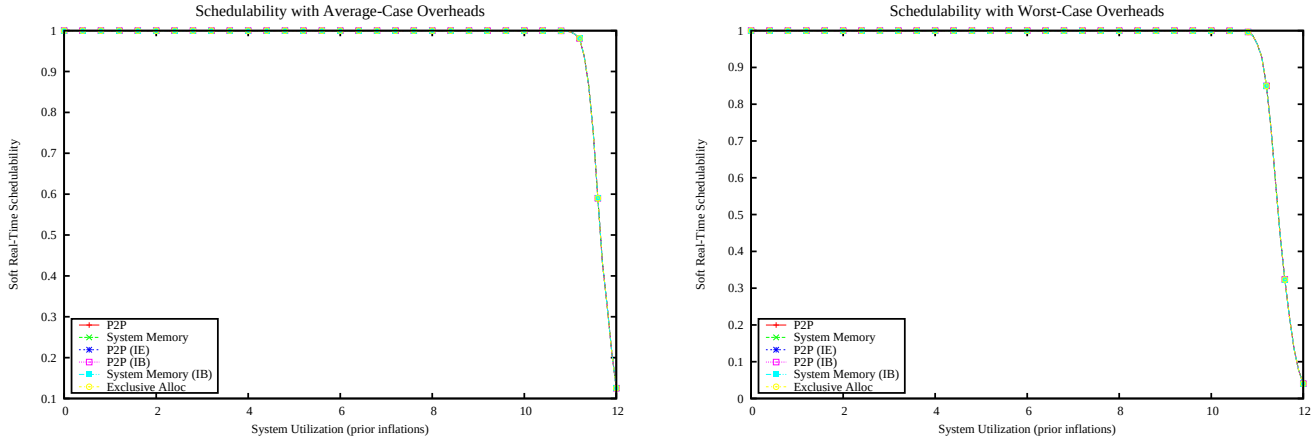

Figure 1663: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

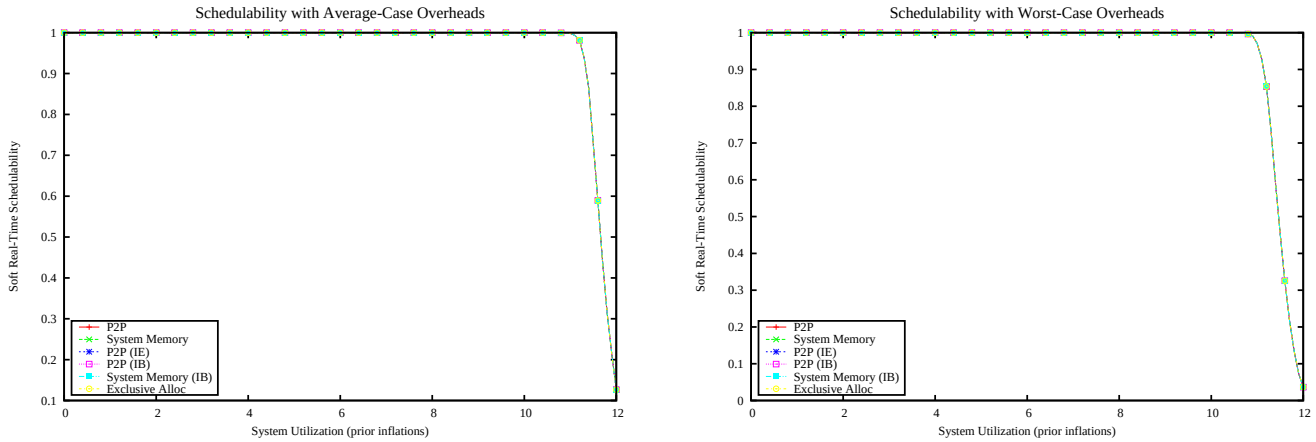

Figure 1664: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

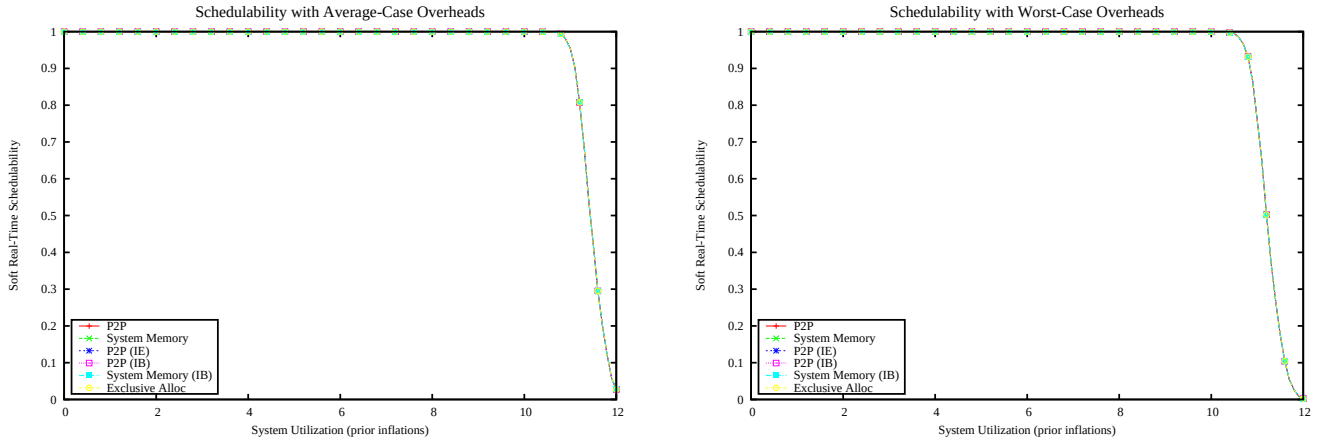

Figure 1665: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

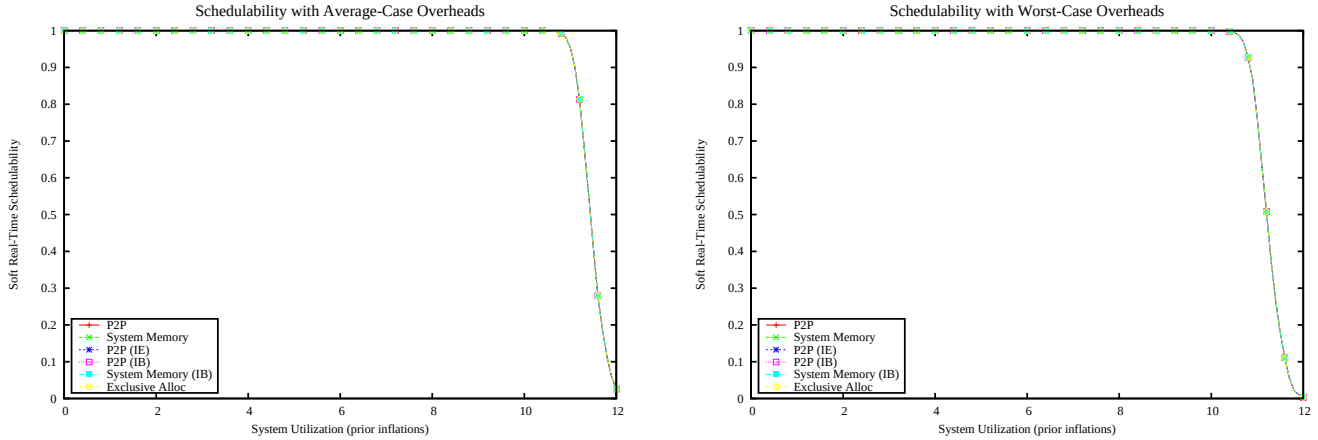

Figure 1666: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

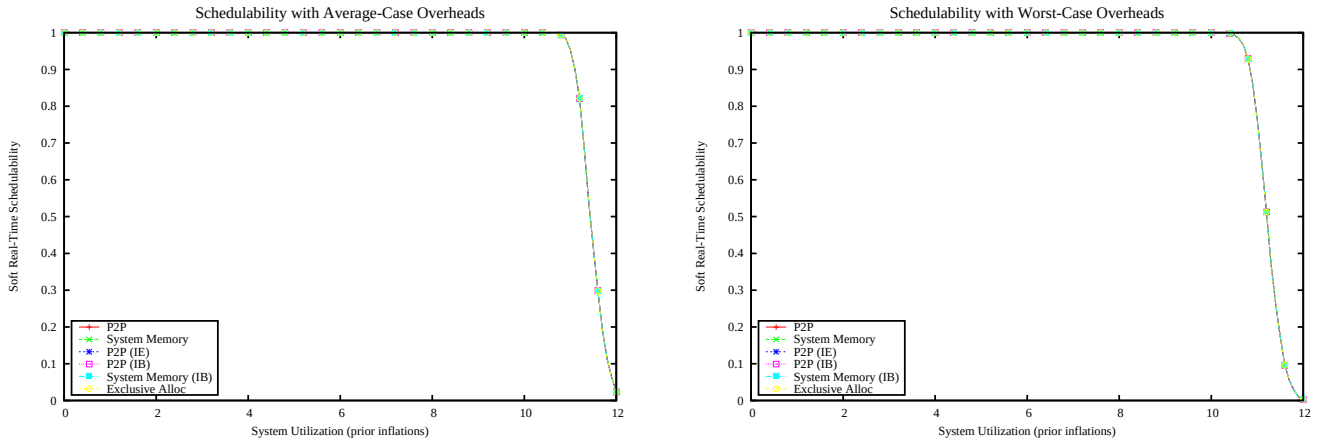

Figure 1667: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

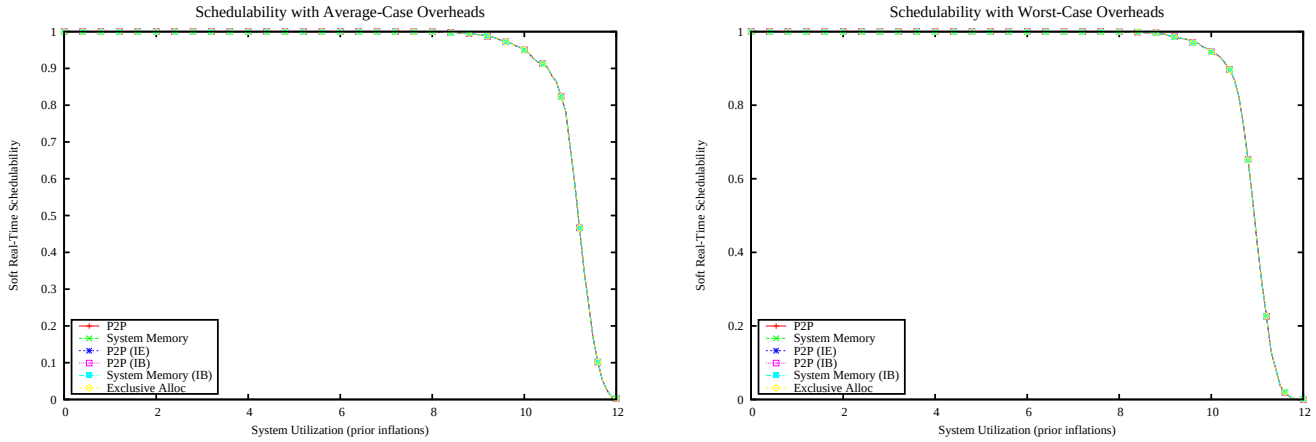

Figure 1668: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

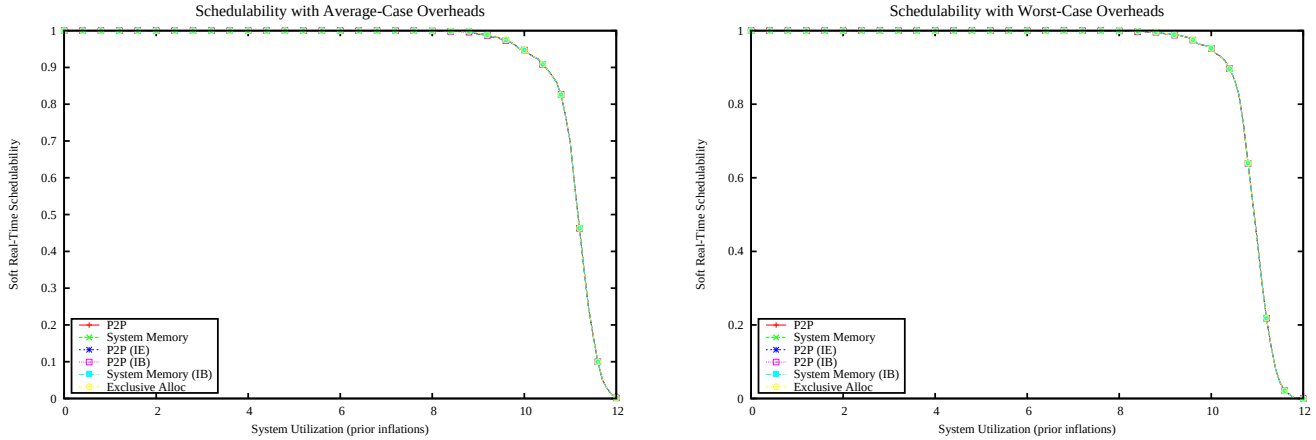

Figure 1669: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

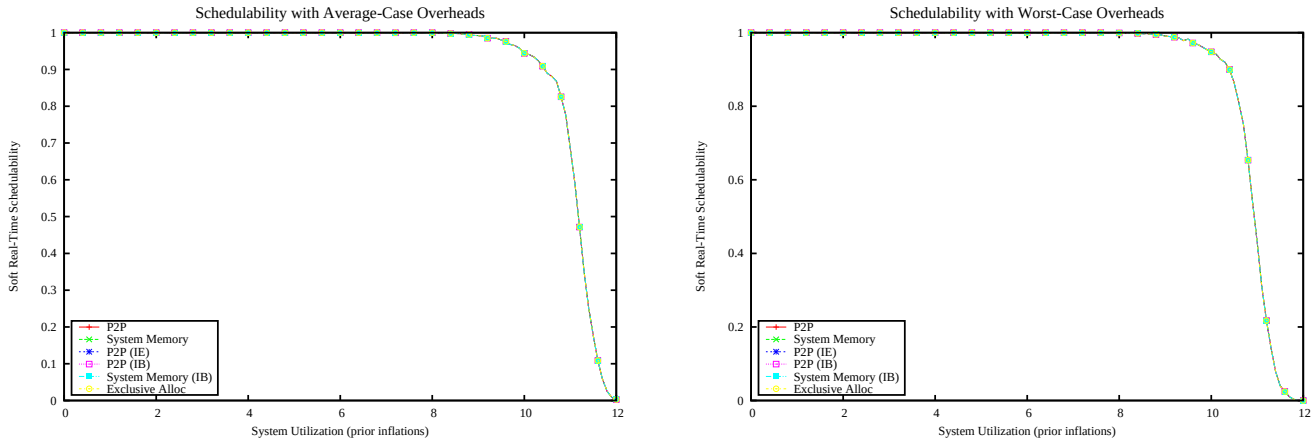

Figure 1670: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

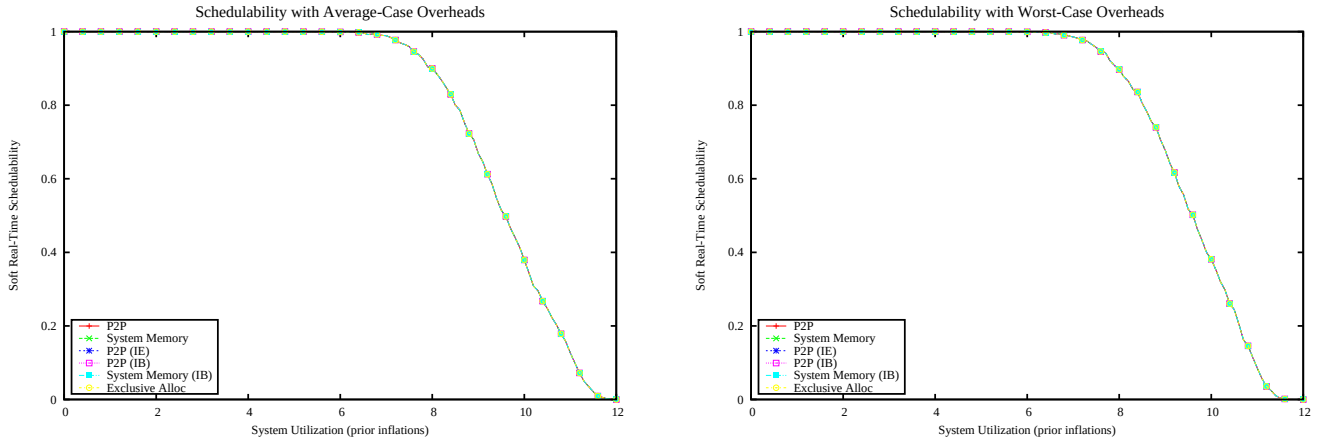

Figure 1671: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

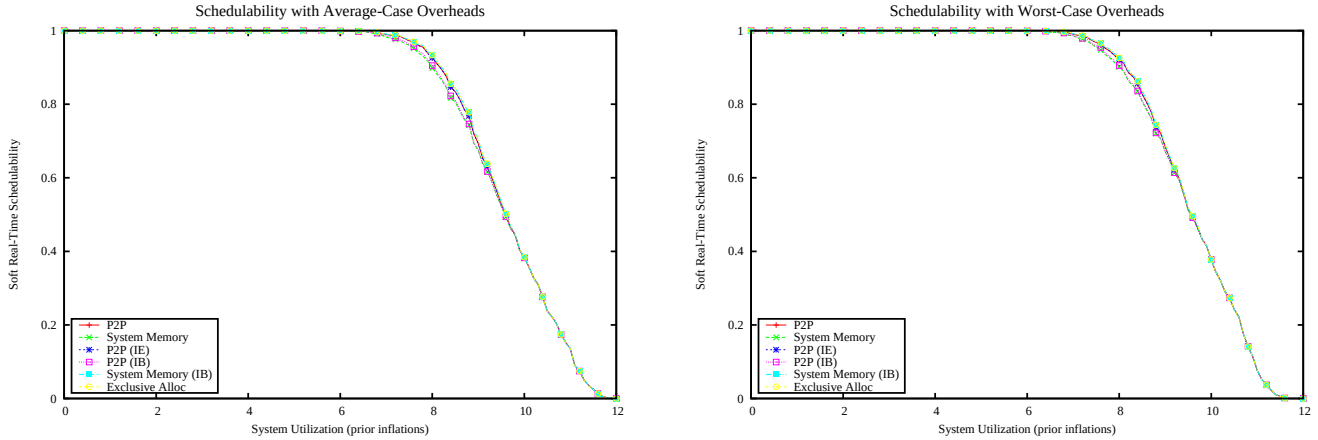

Figure 1672: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

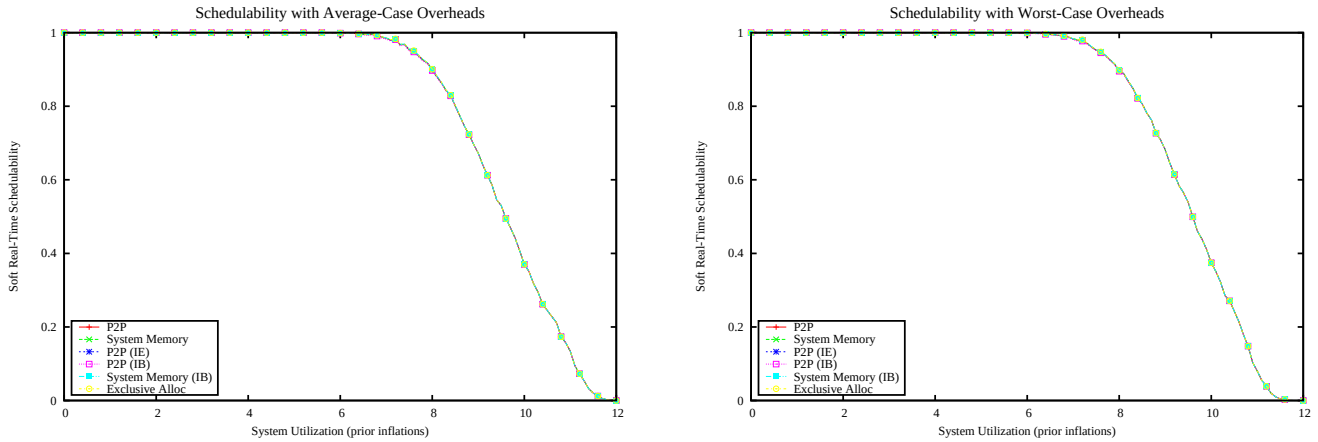

Figure 1673: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

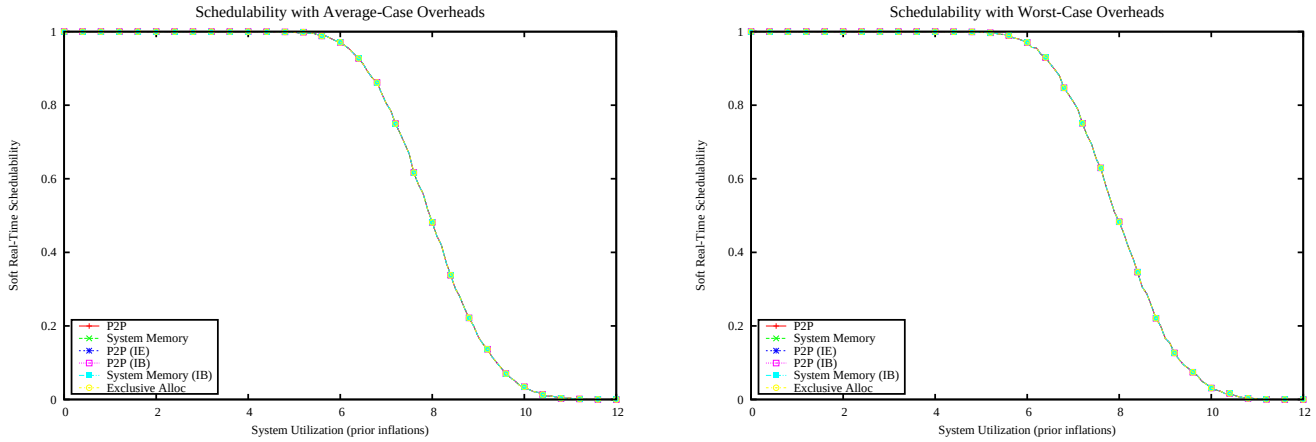

Figure 1674: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

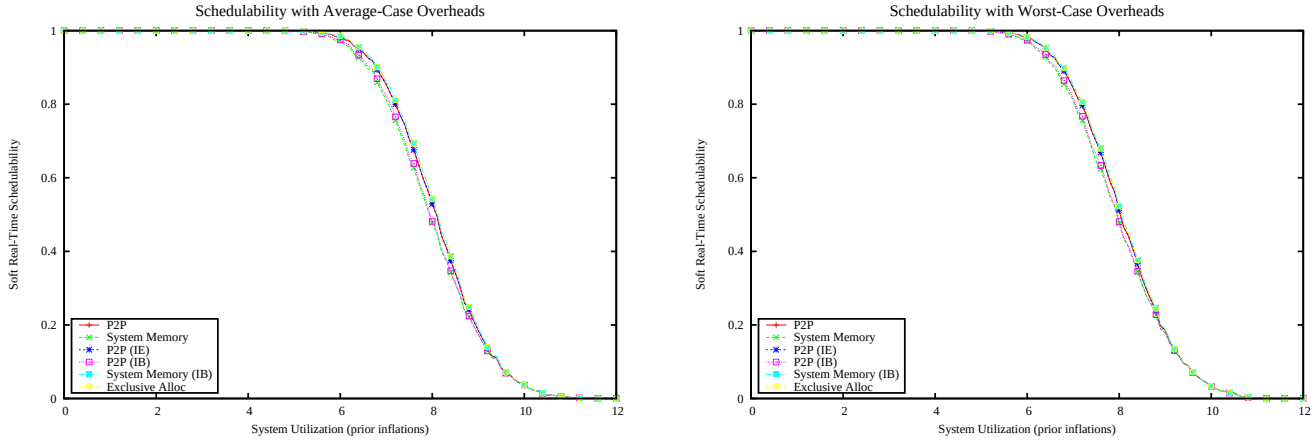

Figure 1675: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

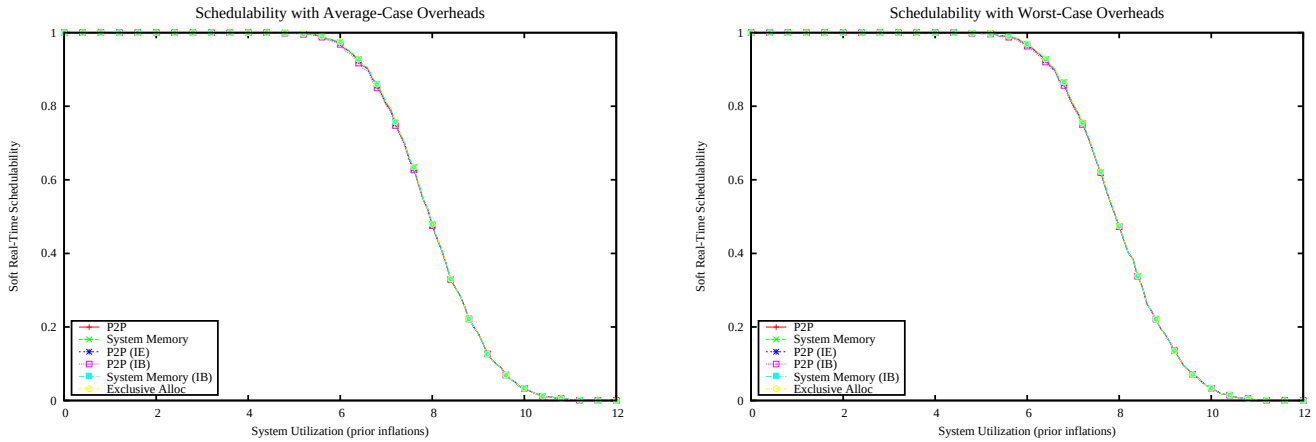

Figure 1676: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

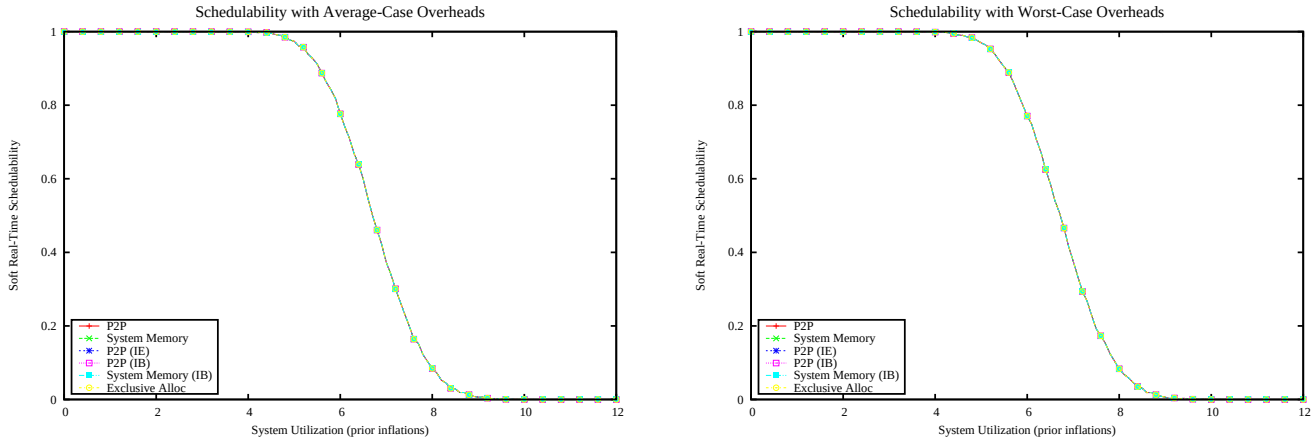

Figure 1677: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

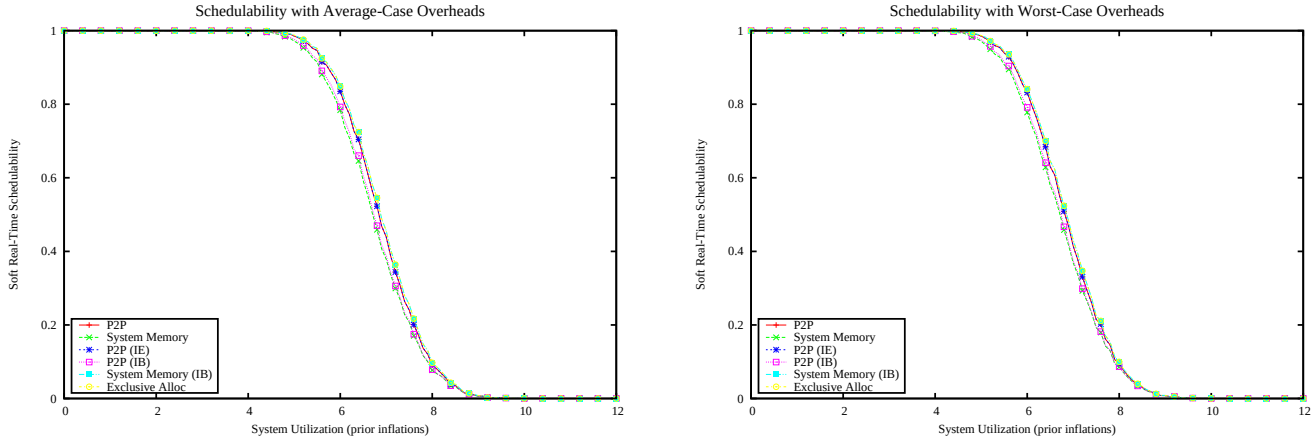

Figure 1678: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

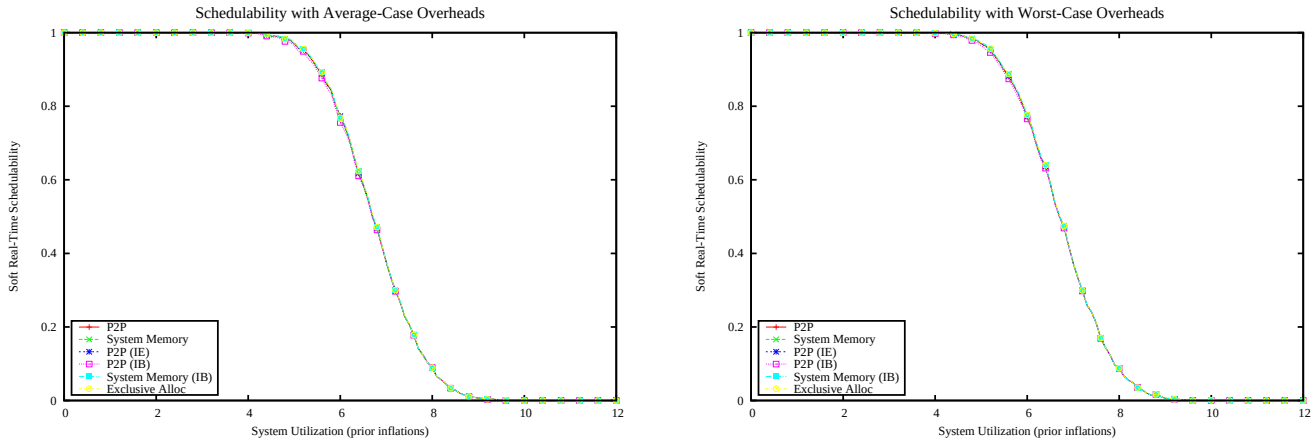

Figure 1679: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

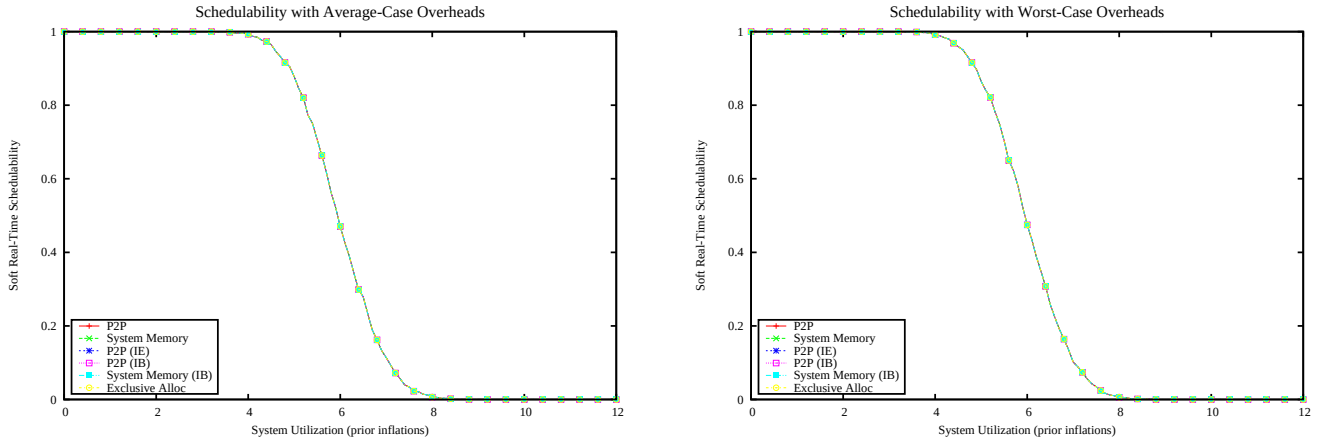

Figure 1680: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

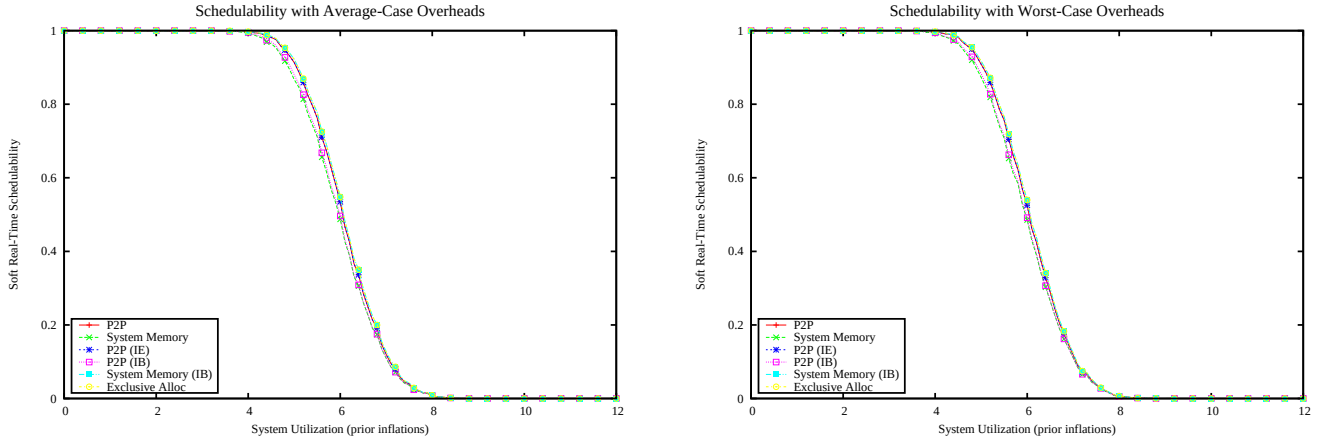

Figure 1681: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

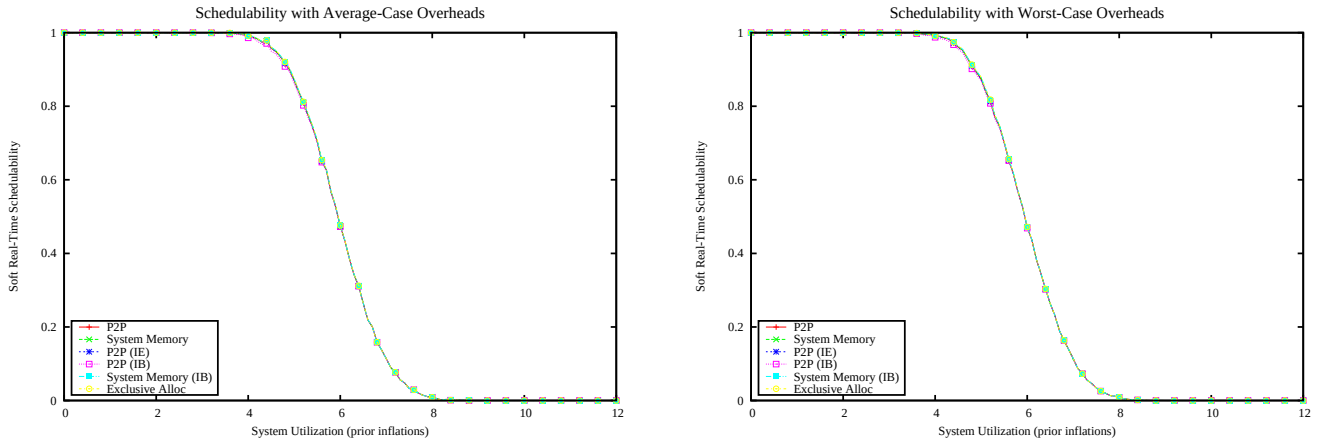

Figure 1682: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

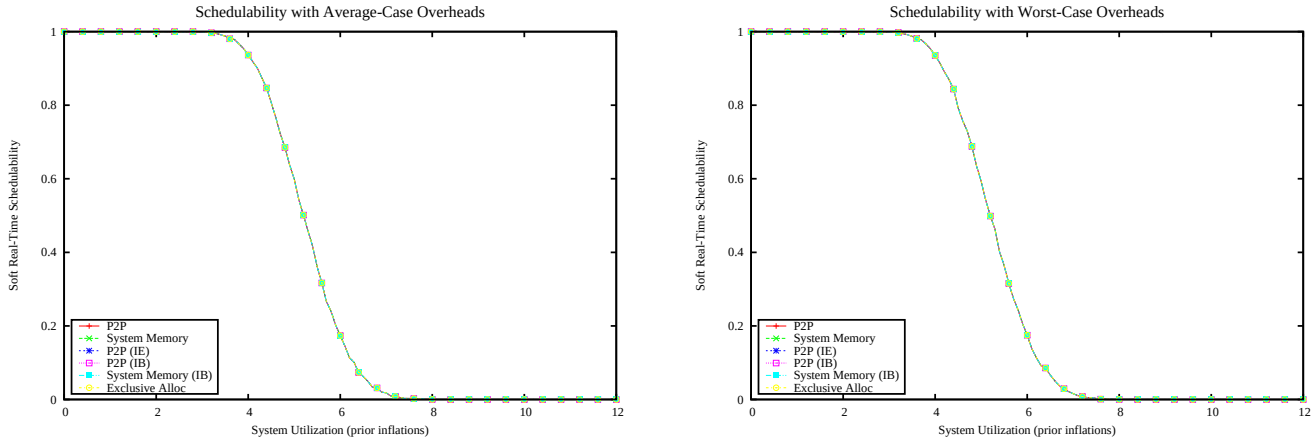

Figure 1683: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

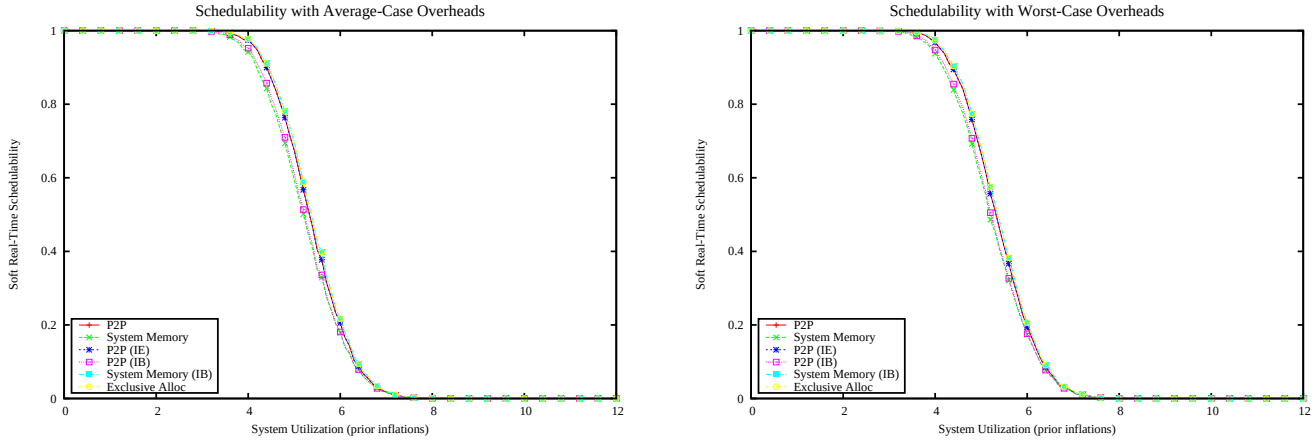

Figure 1684: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

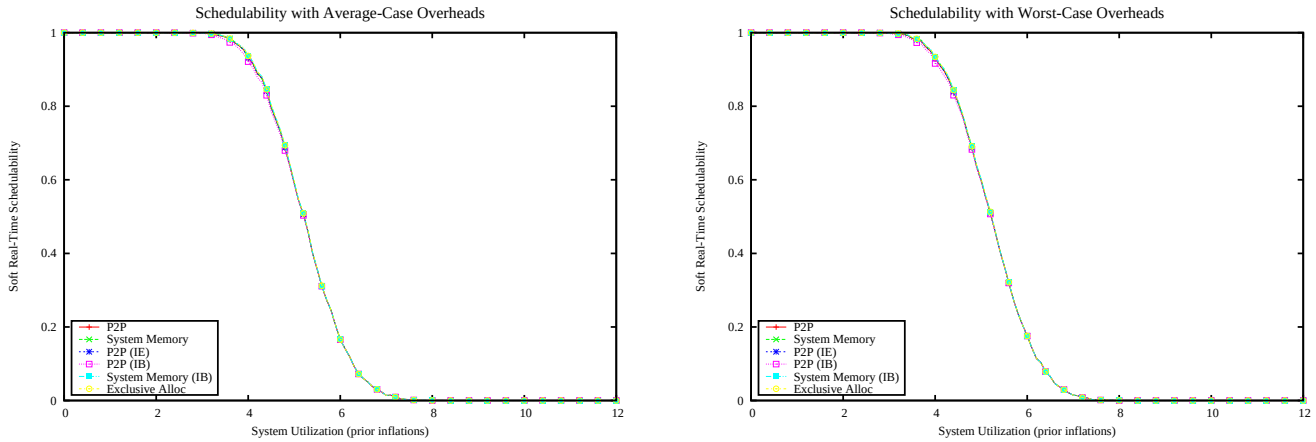

Figure 1685: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

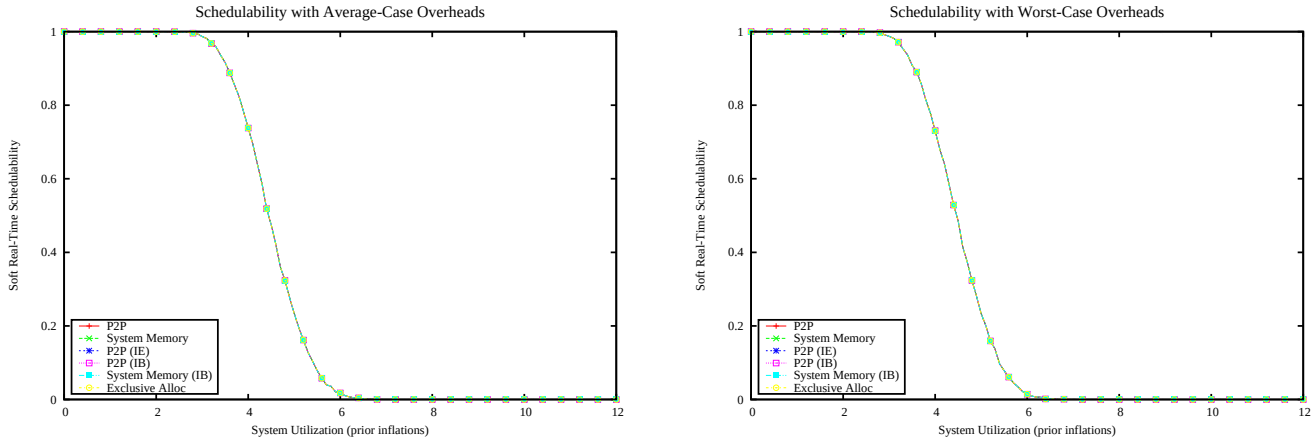

Figure 1686: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

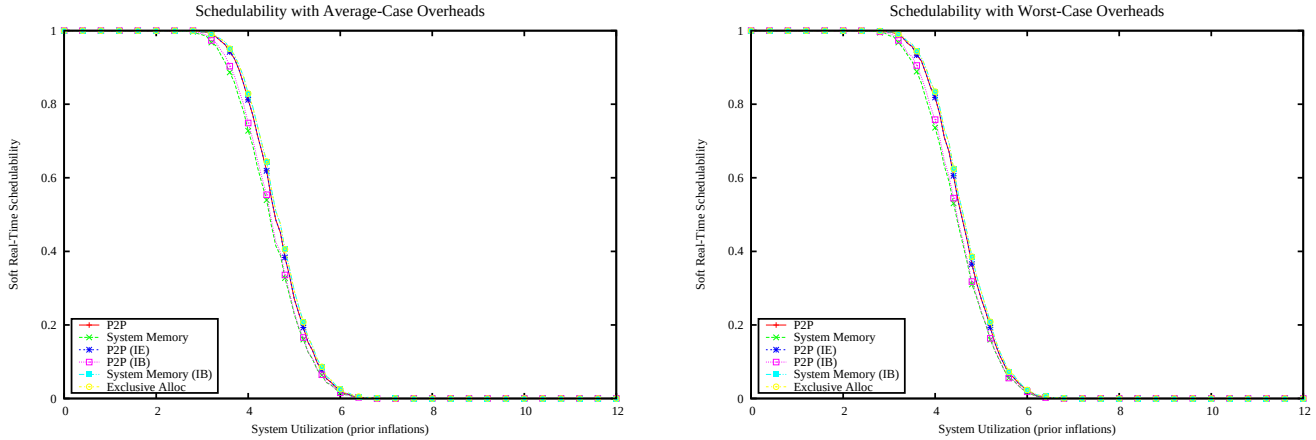

Figure 1687: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

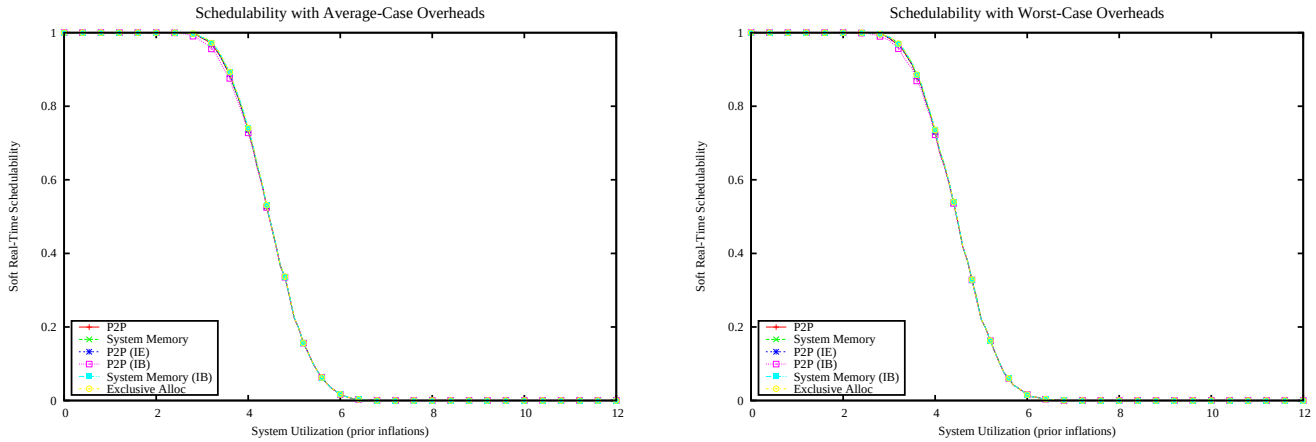

Figure 1688: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

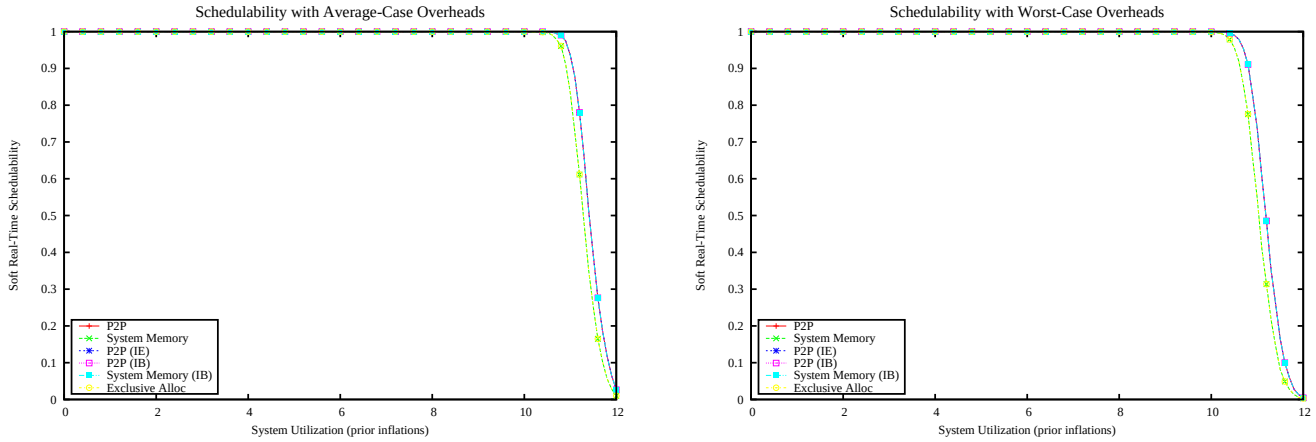

Figure 1689: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

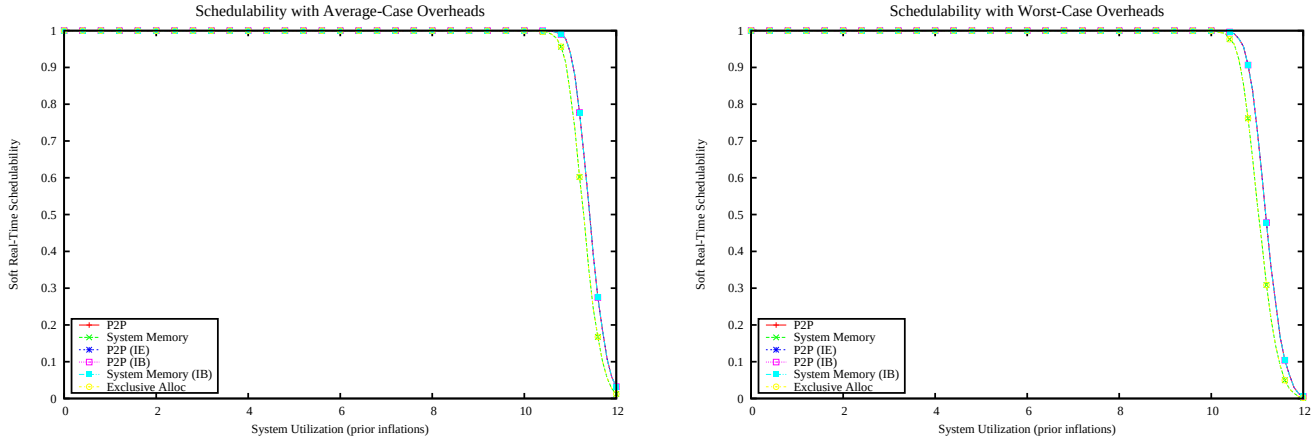

Figure 1690: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

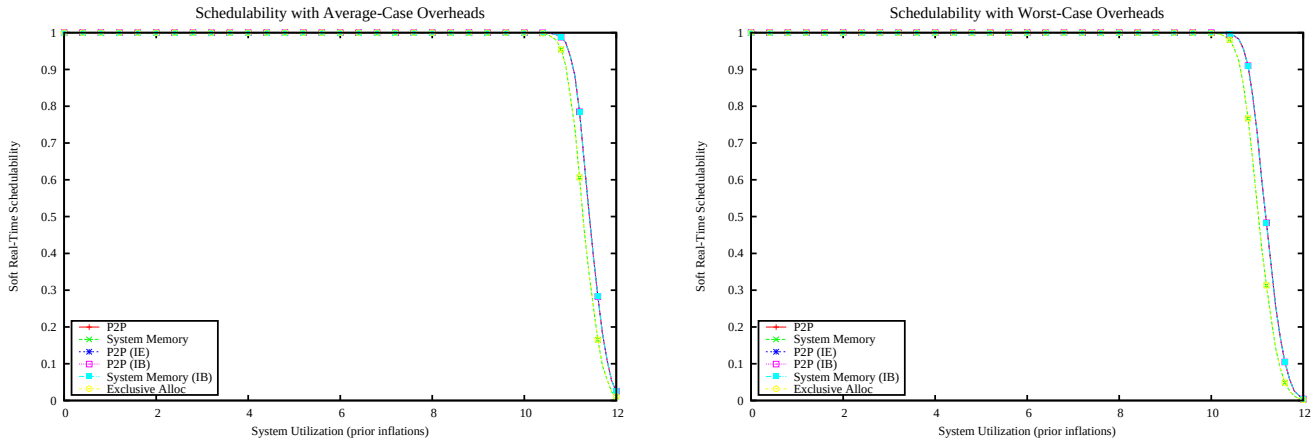

Figure 1691: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

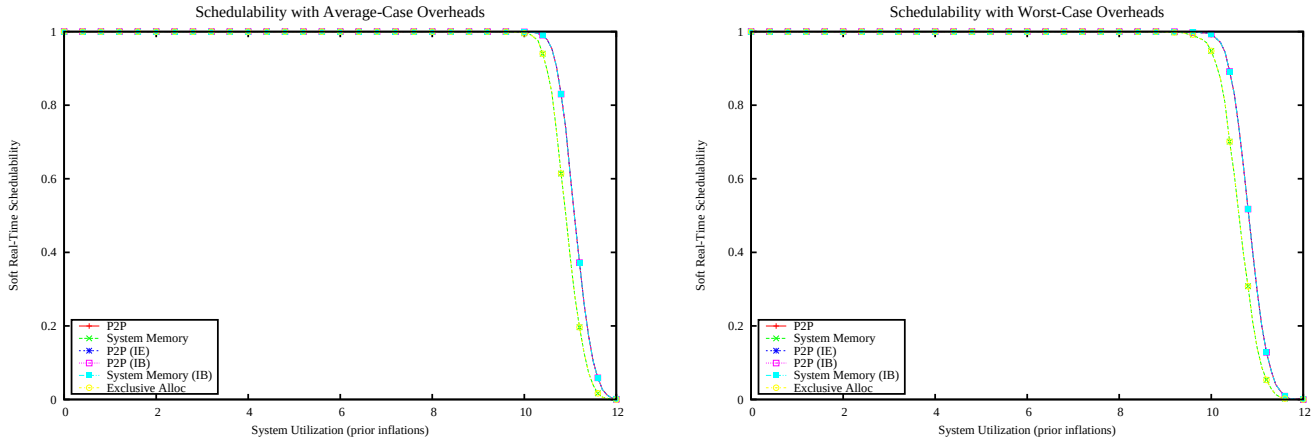

Figure 1692: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

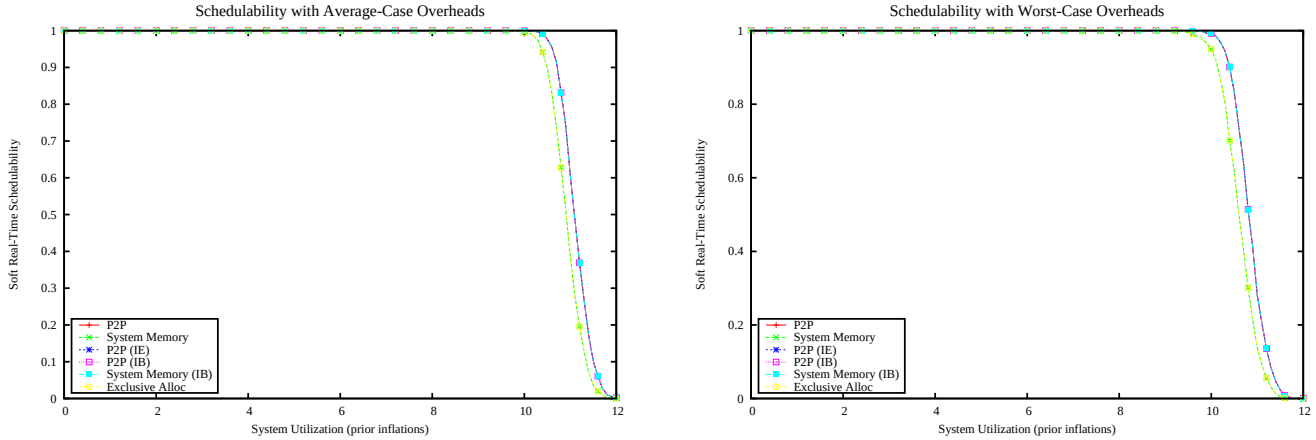

Figure 1693: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

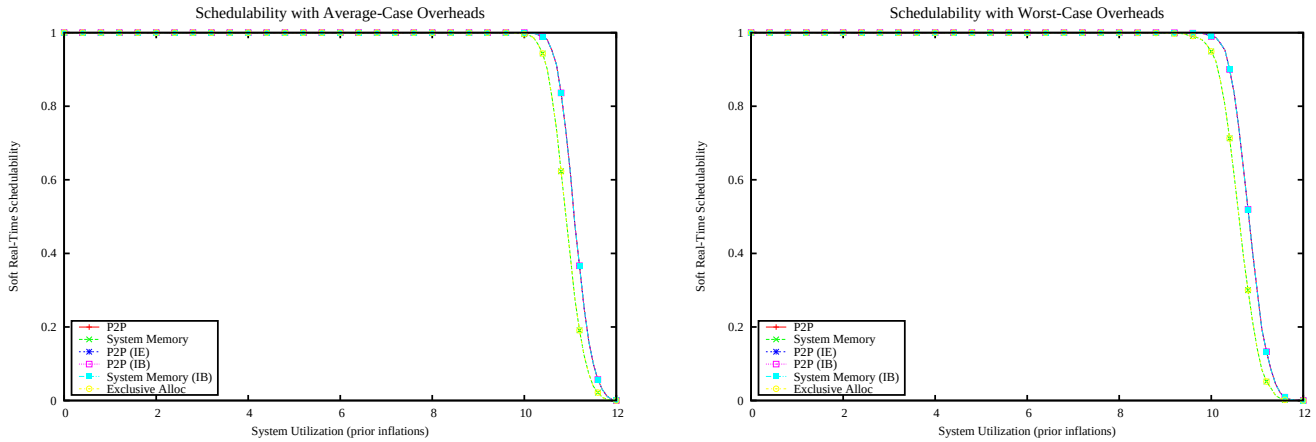

Figure 1694: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

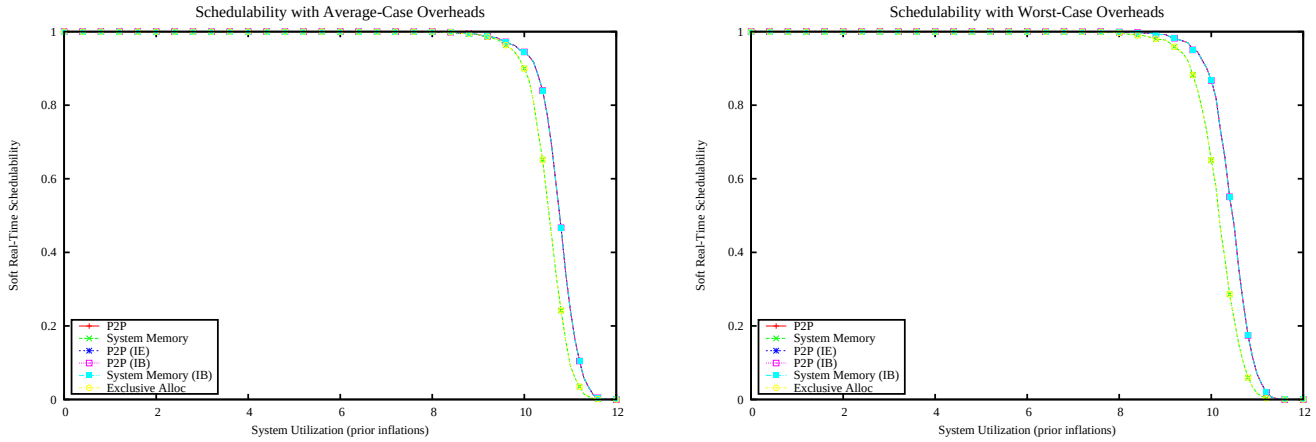

Figure 1695: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

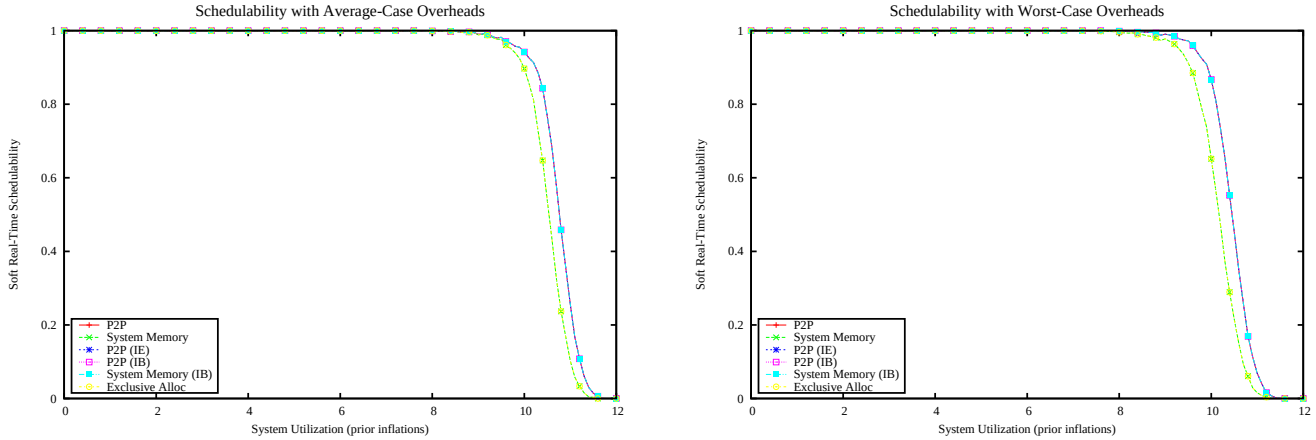

Figure 1696: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

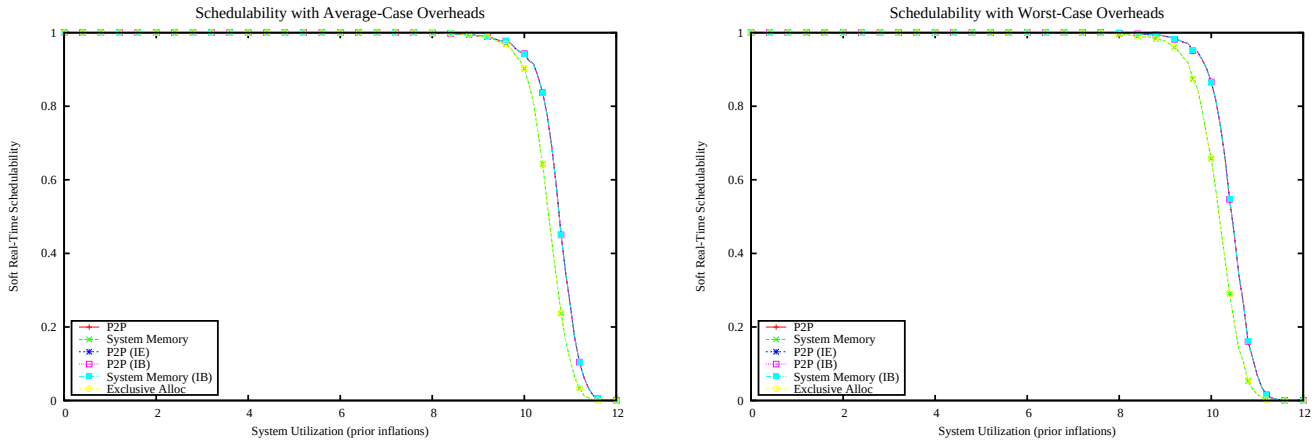

Figure 1697: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

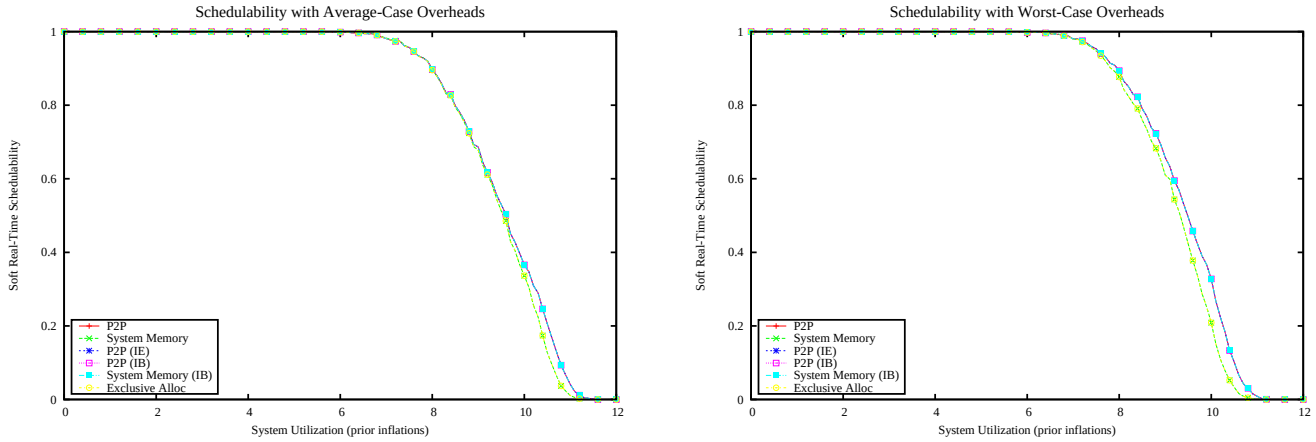

Figure 1698: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

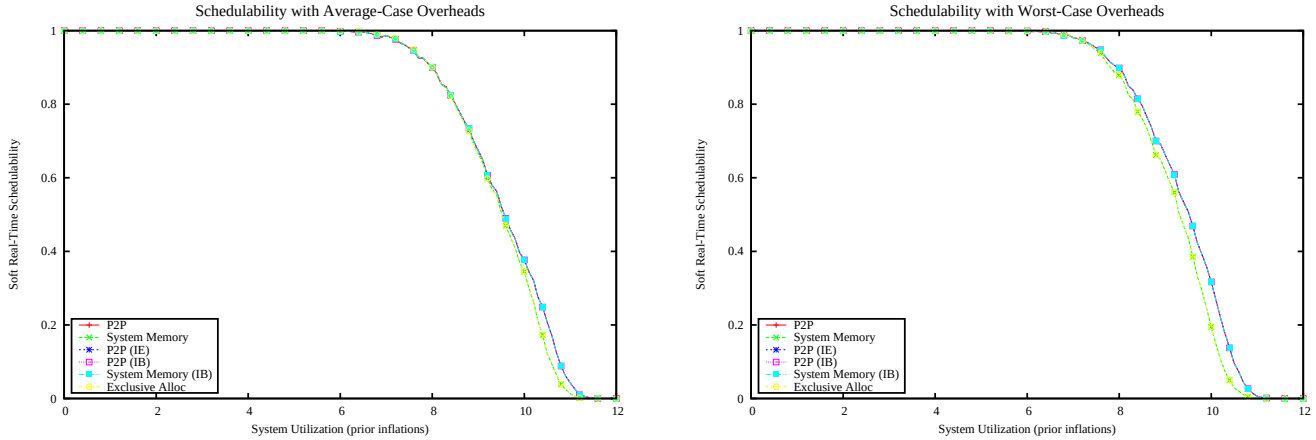

Figure 1699: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

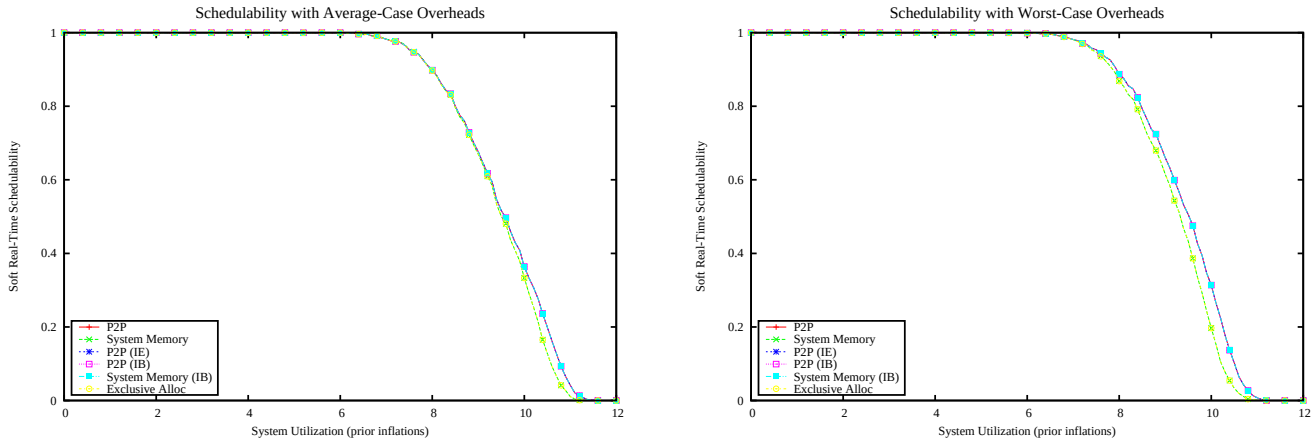

Figure 1700: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

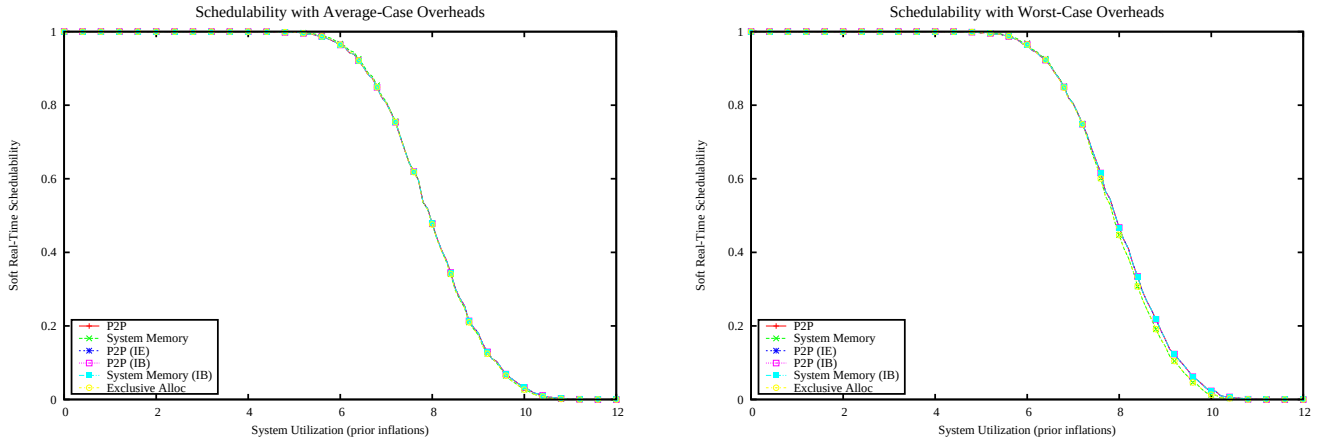

Figure 1701: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

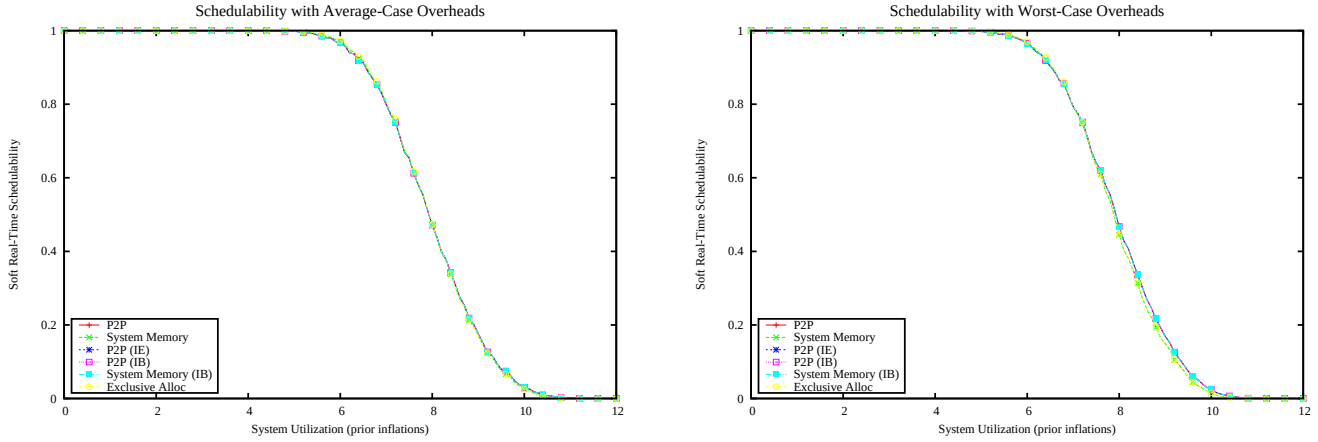

Figure 1702: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

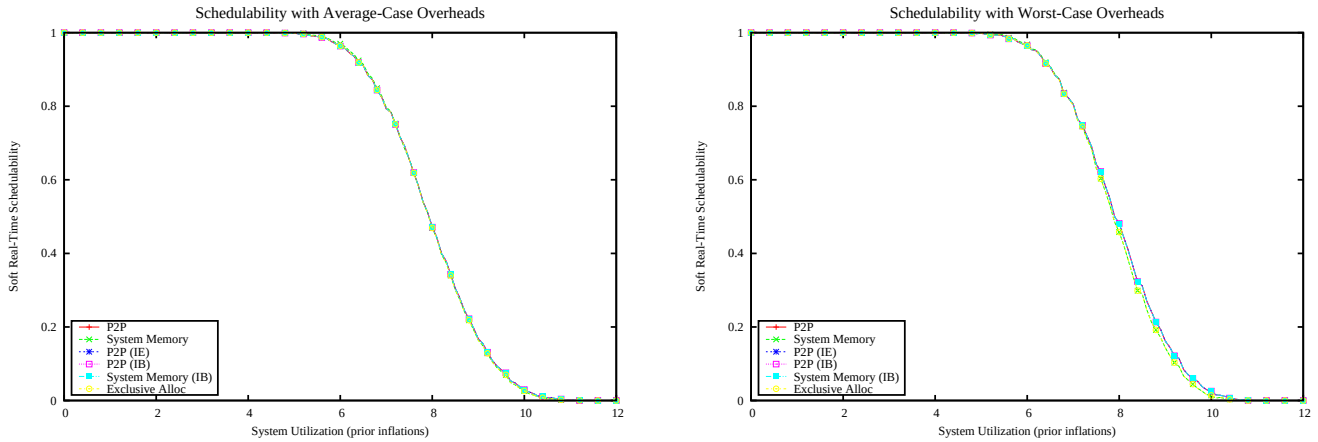

Figure 1703: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

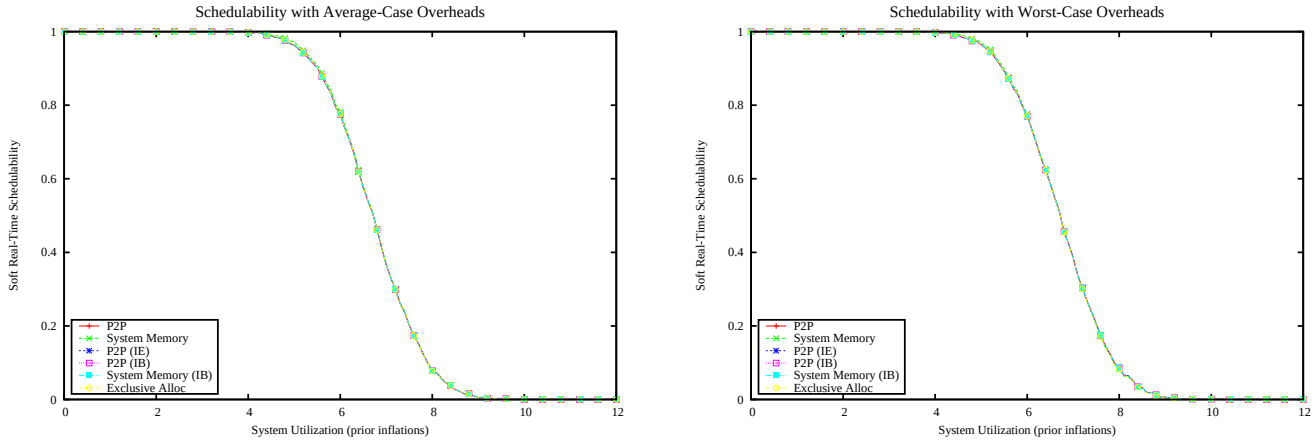

Figure 1704: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

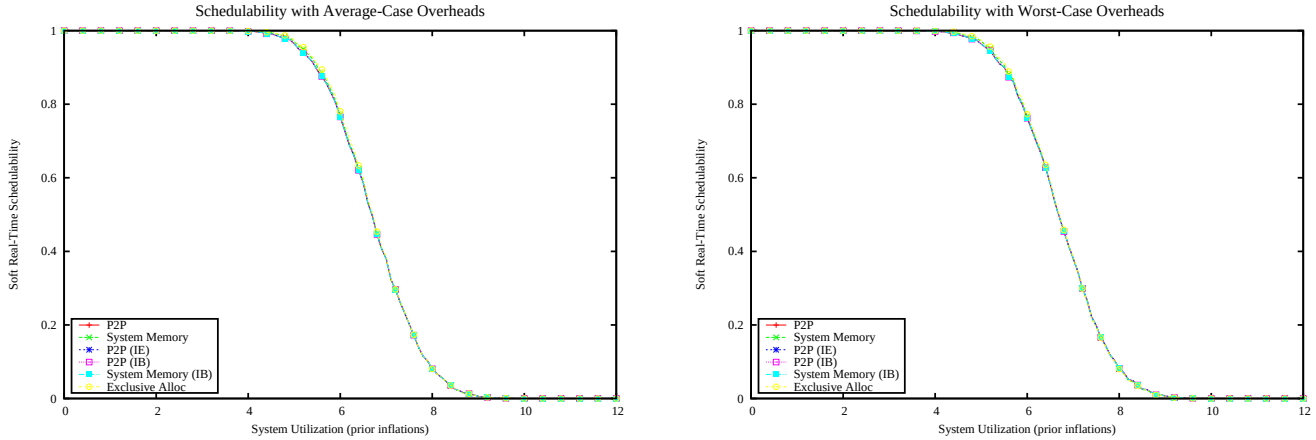

Figure 1705: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

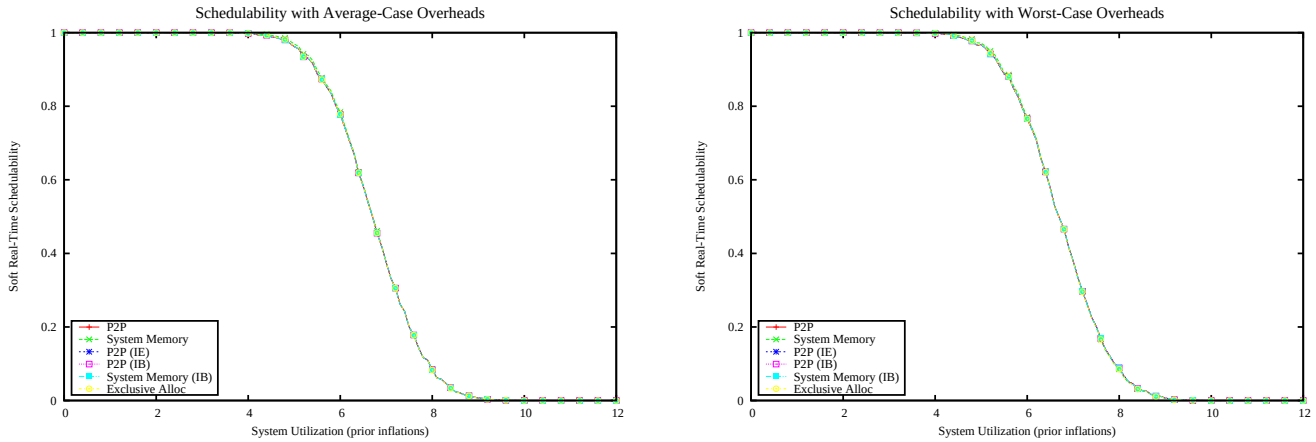

Figure 1706: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

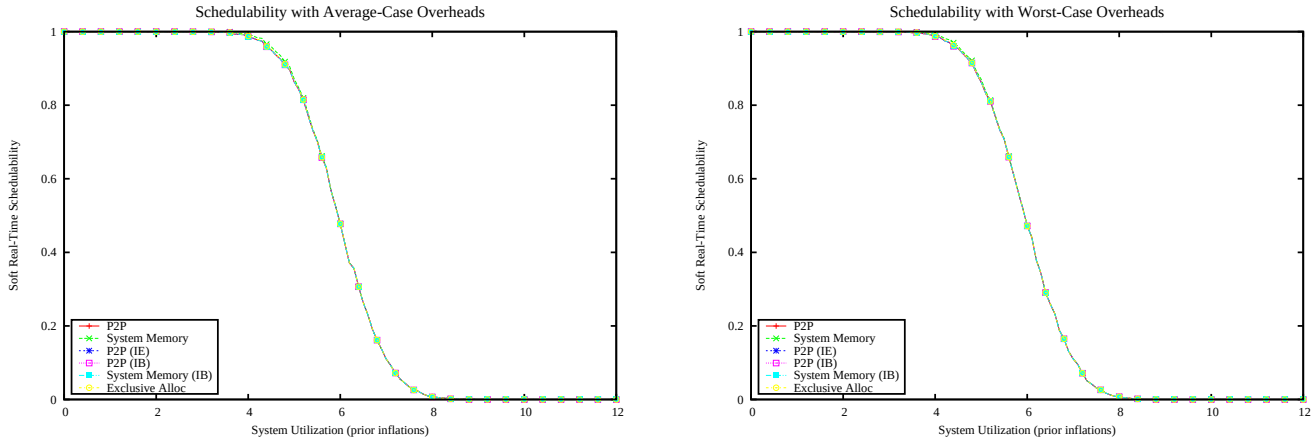

Figure 1707: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

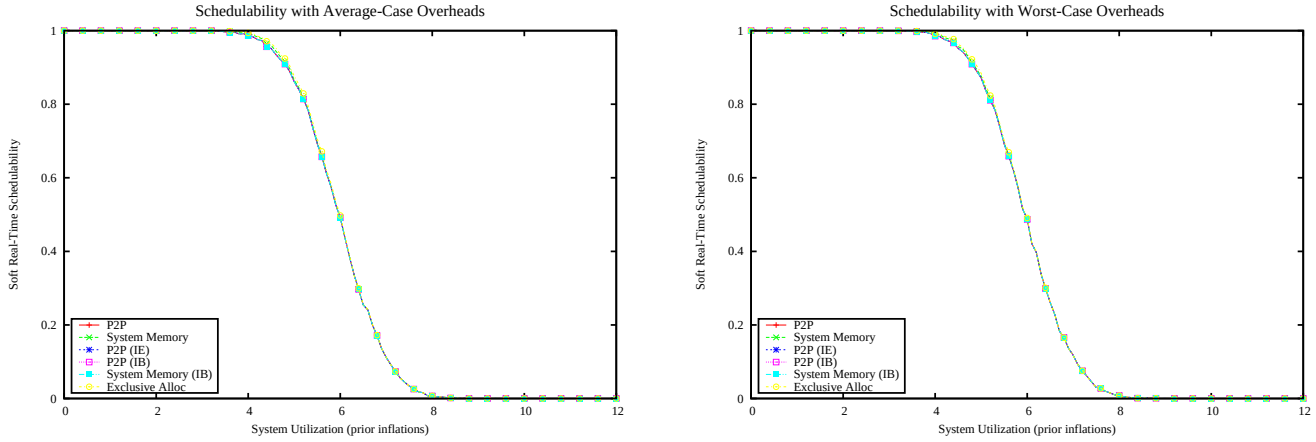

Figure 1708: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

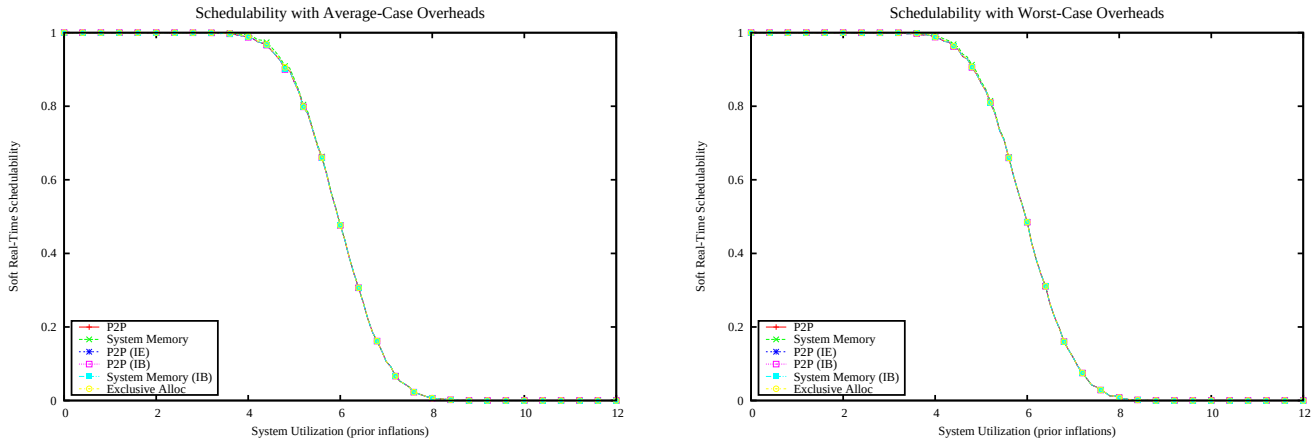

Figure 1709: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

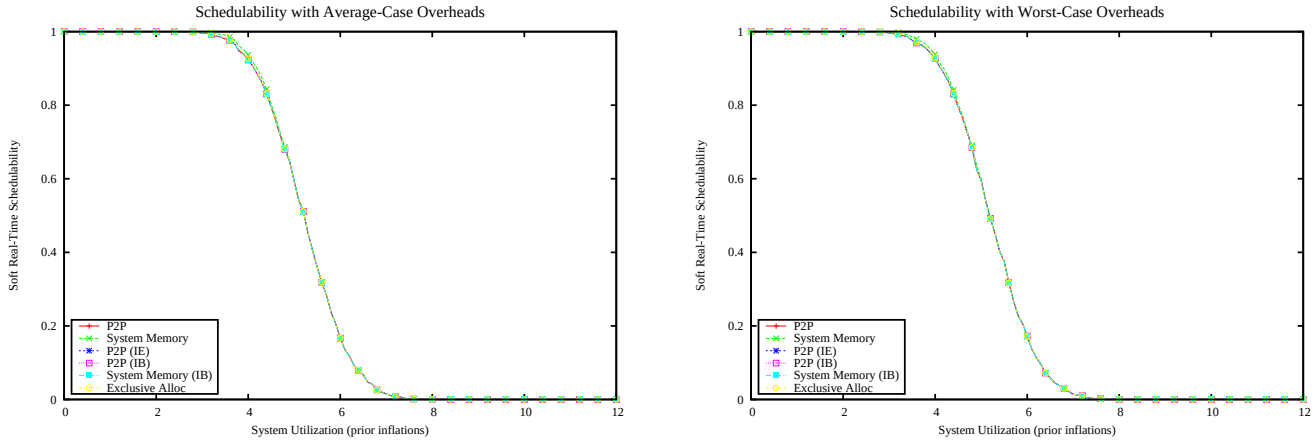

Figure 1710: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

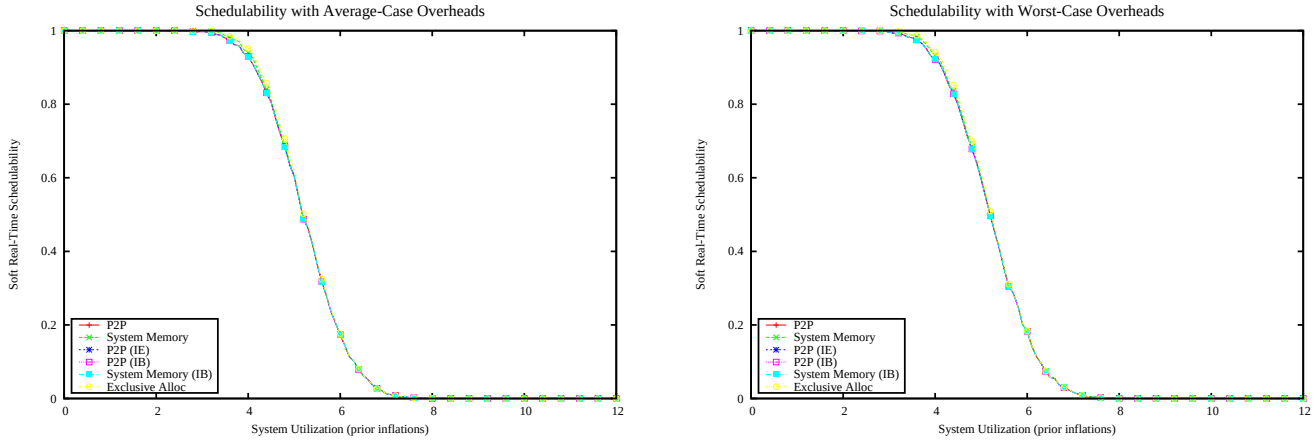

Figure 1711: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

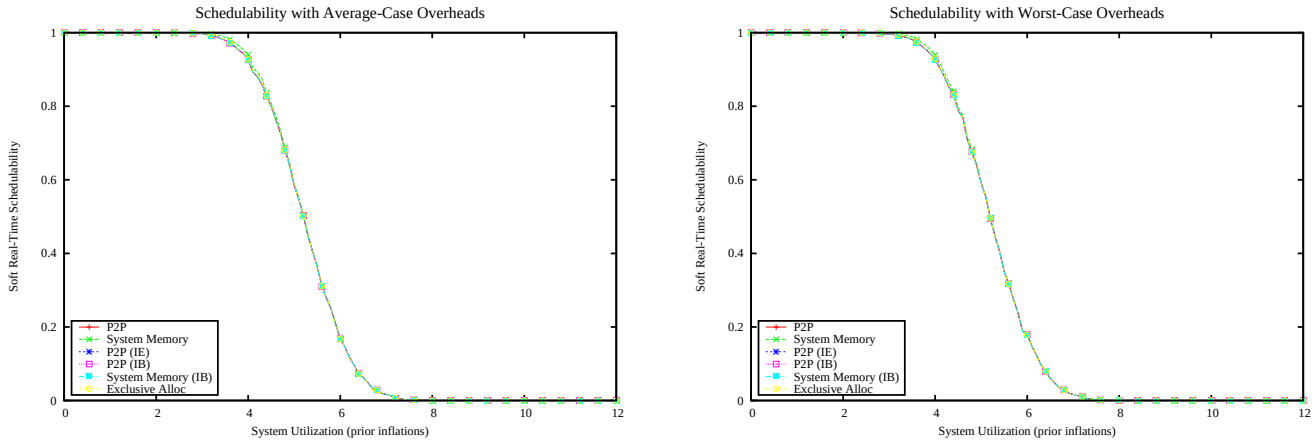

Figure 1712: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

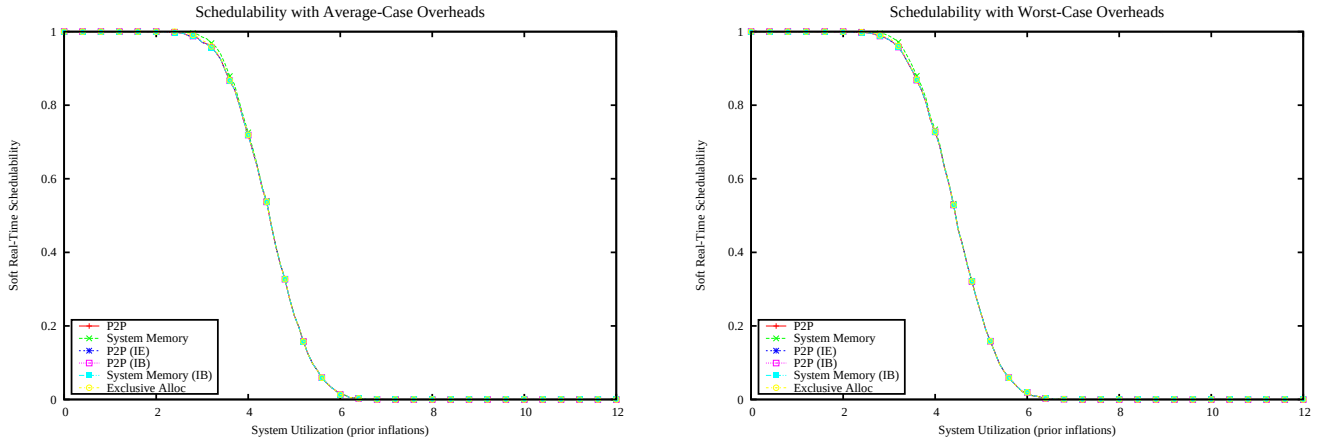

Figure 1713: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

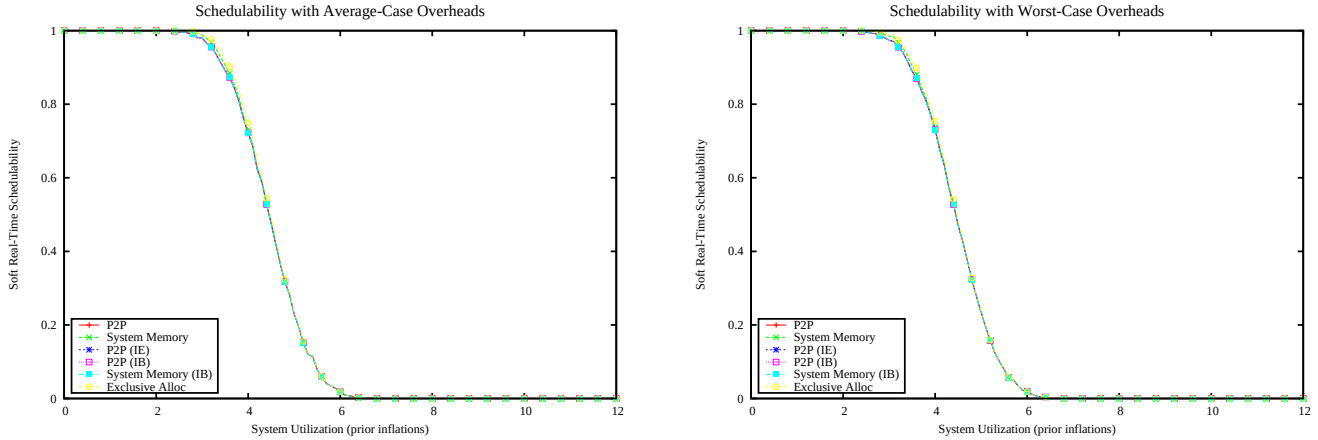

Figure 1714: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

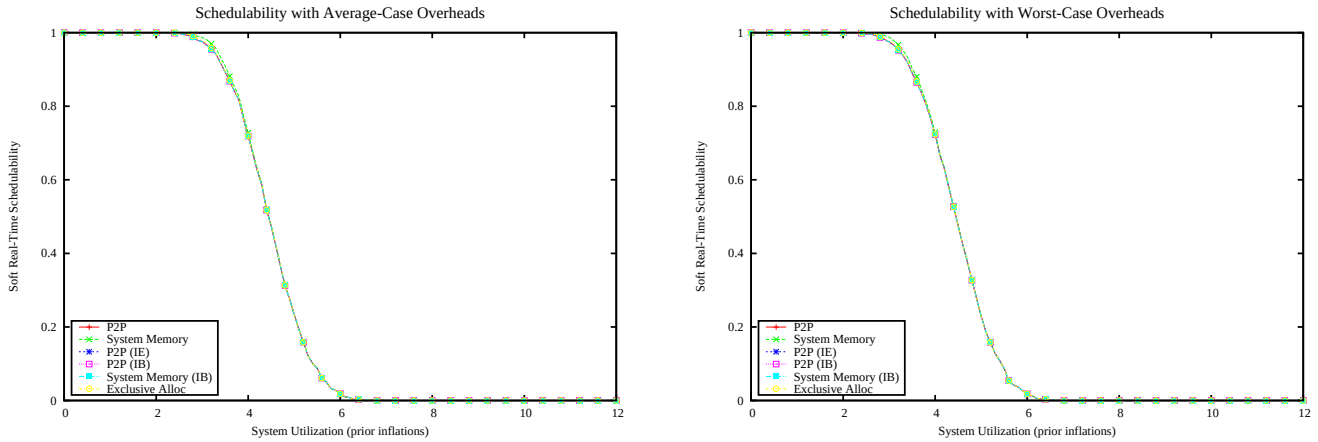

Figure 1715: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

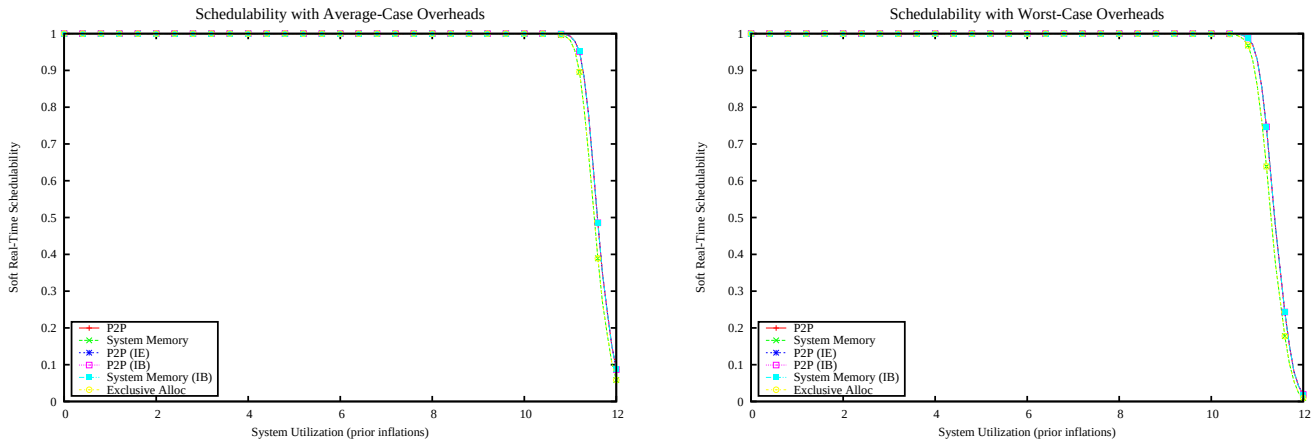

Figure 1716: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

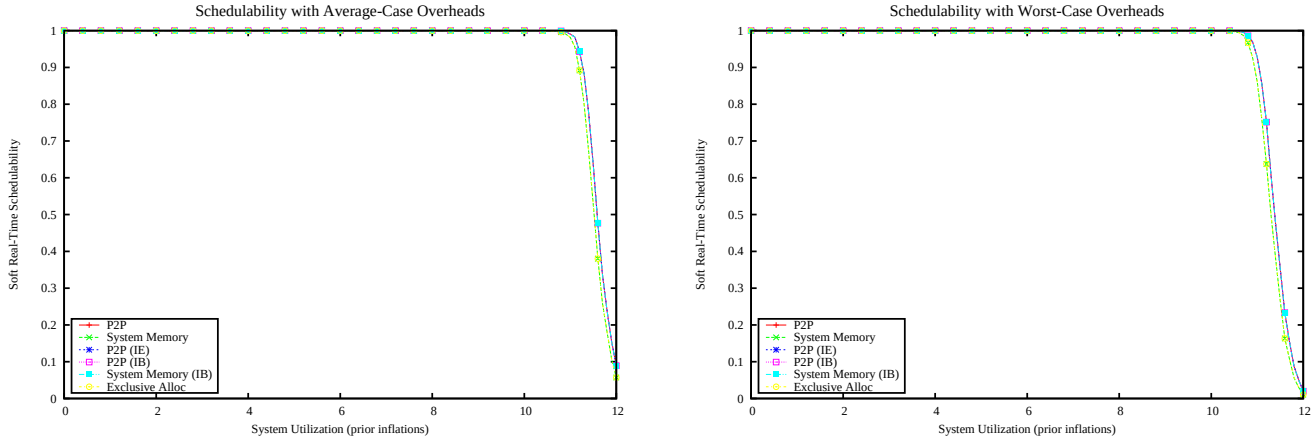

Figure 1717: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

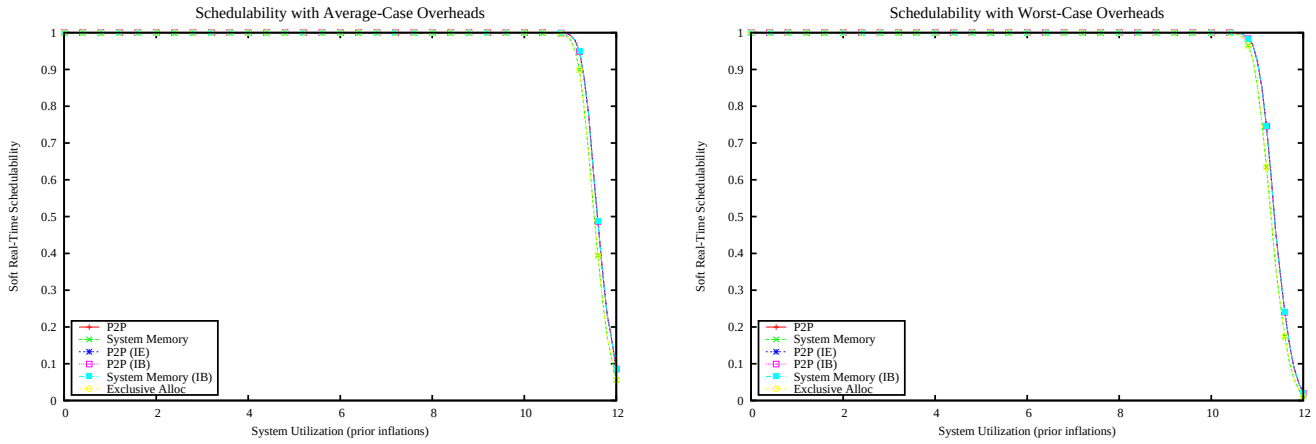

Figure 1718: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

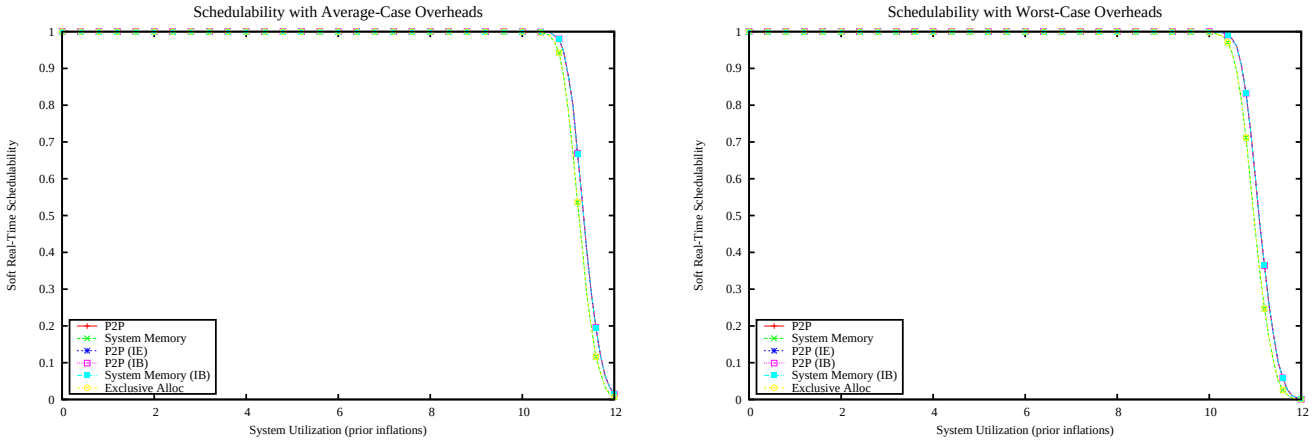

Figure 1719: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

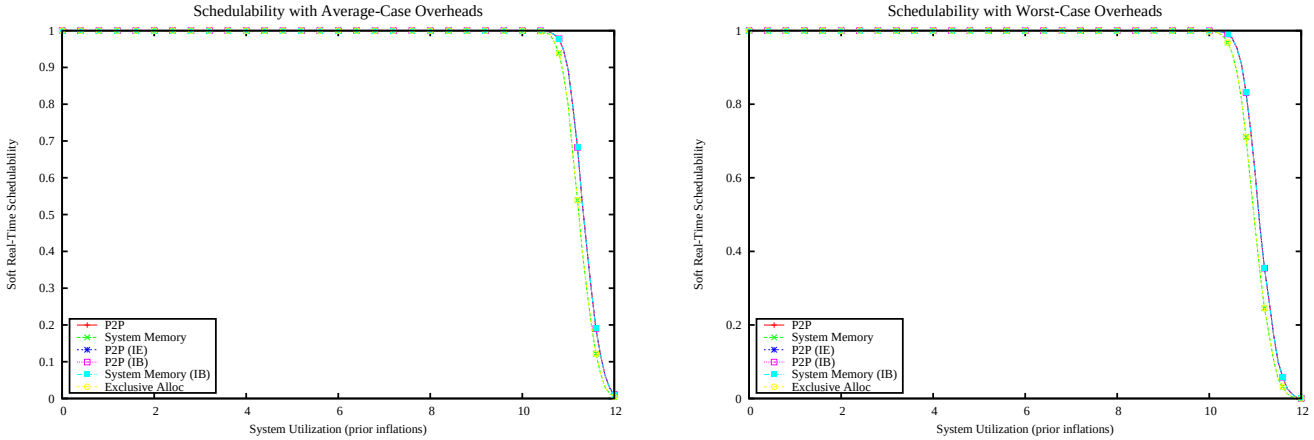

Figure 1720: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

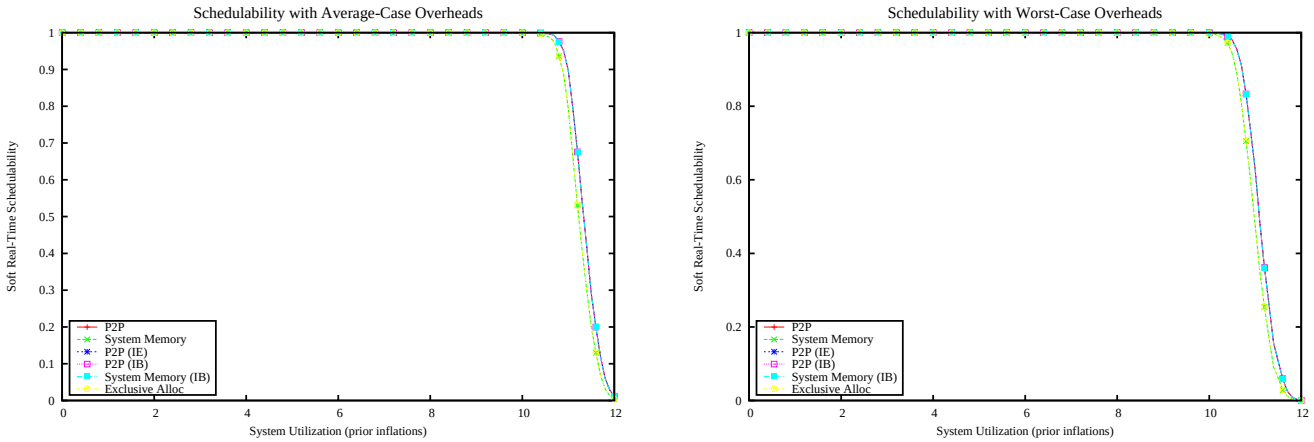

Figure 1721: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

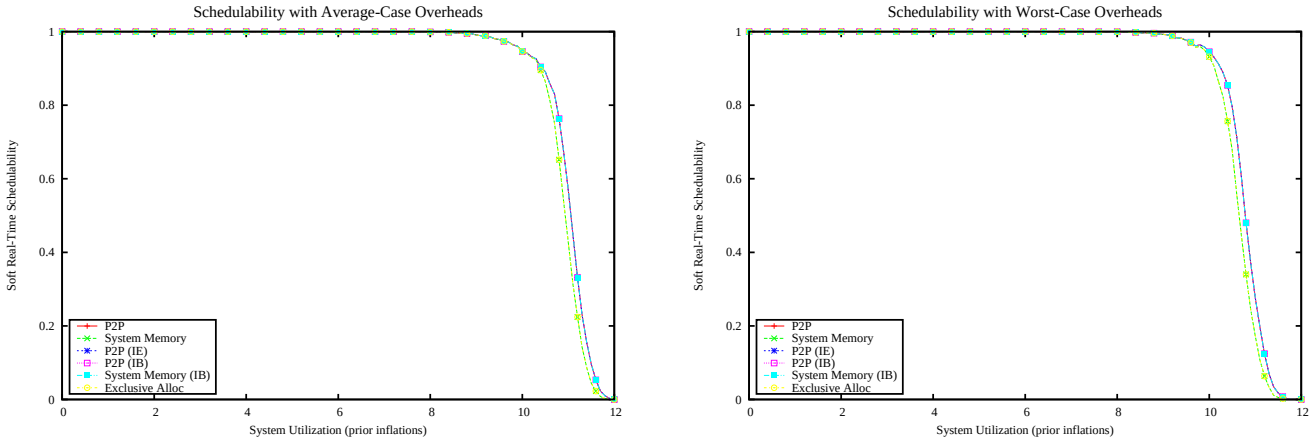

Figure 1722: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

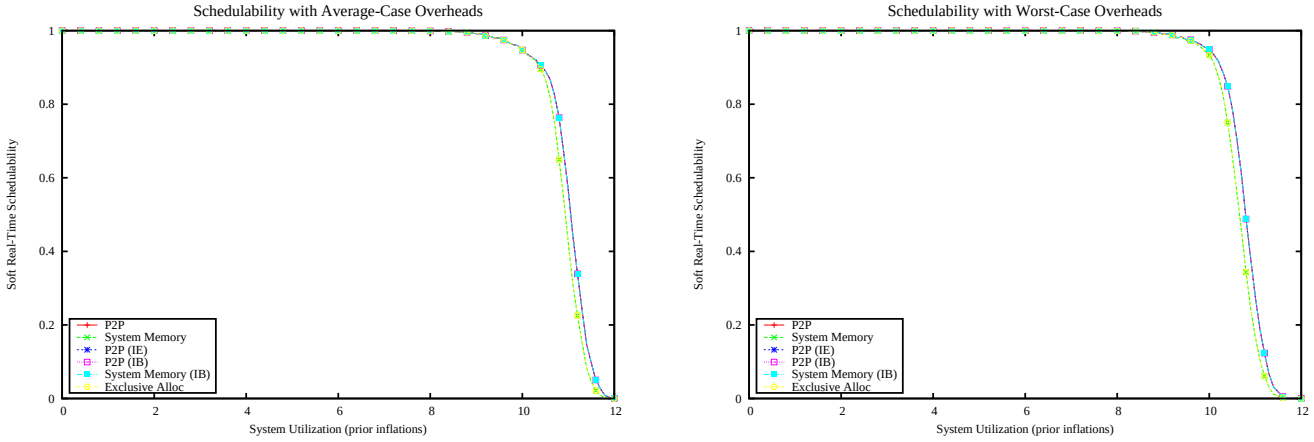

Figure 1723: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

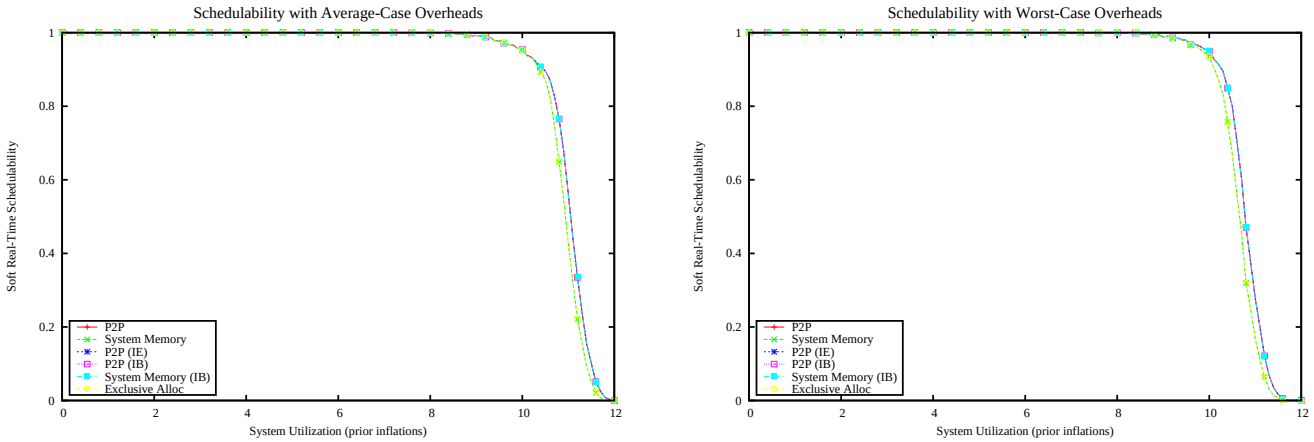

Figure 1724: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

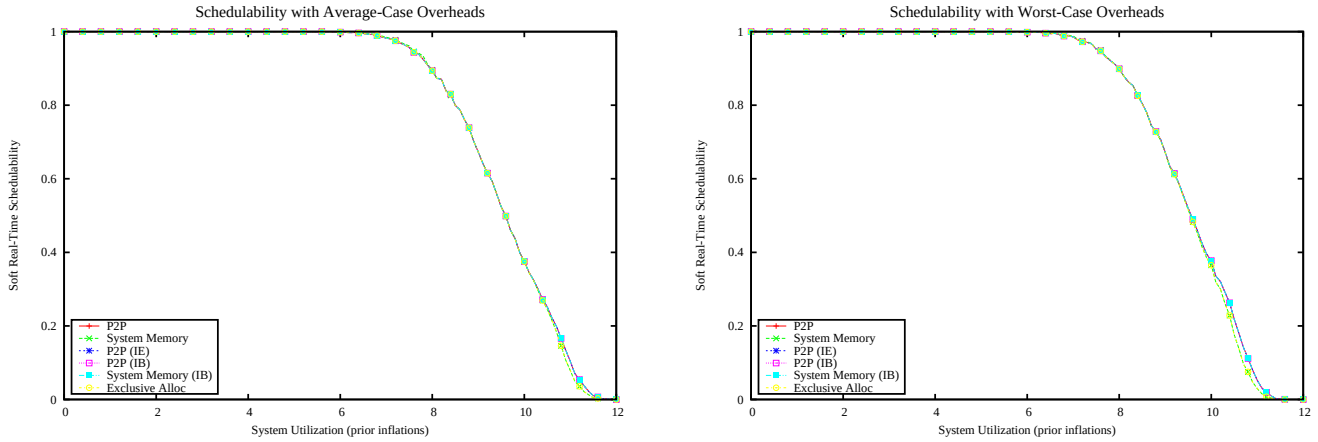

Figure 1725: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

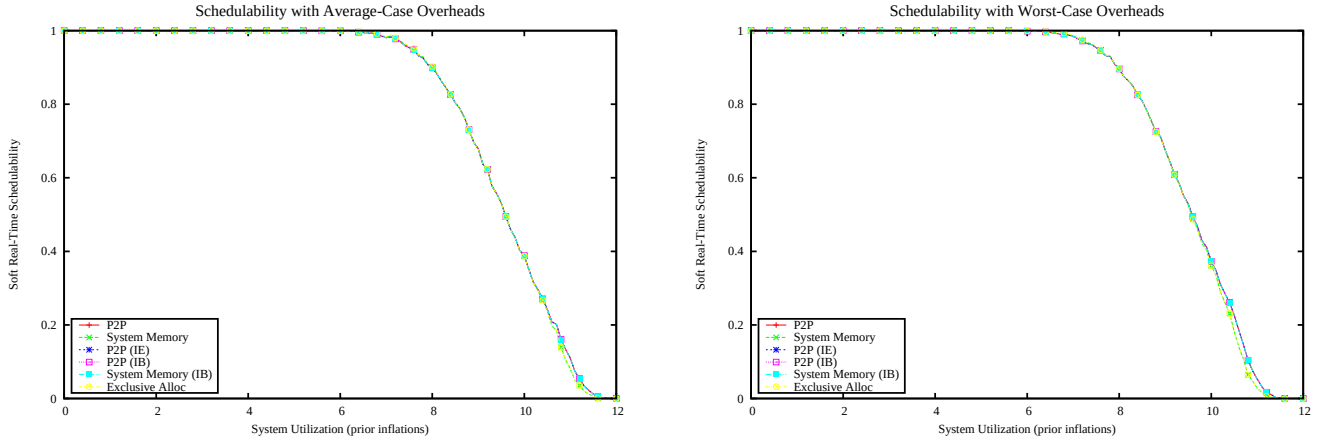

Figure 1726: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

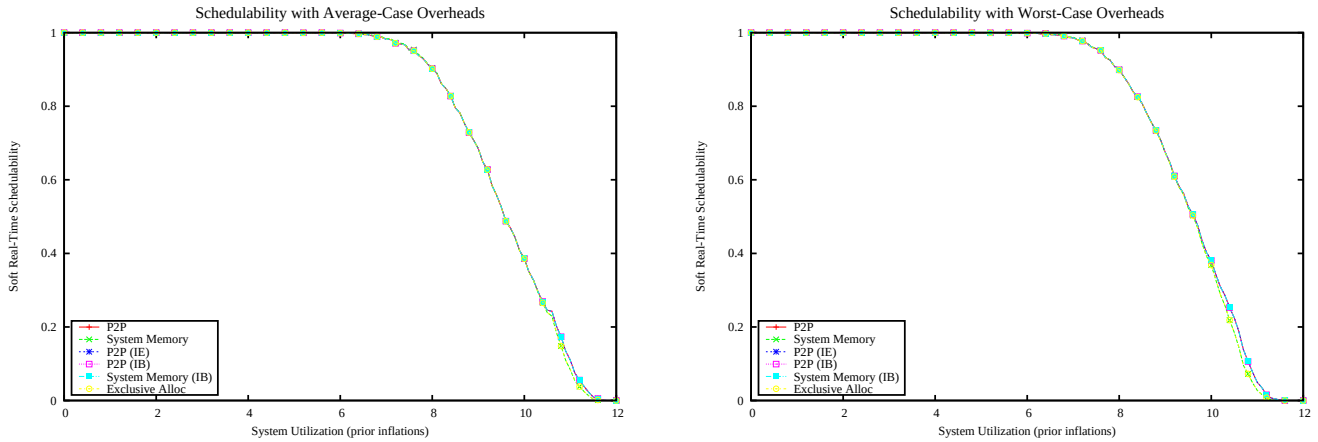

Figure 1727: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

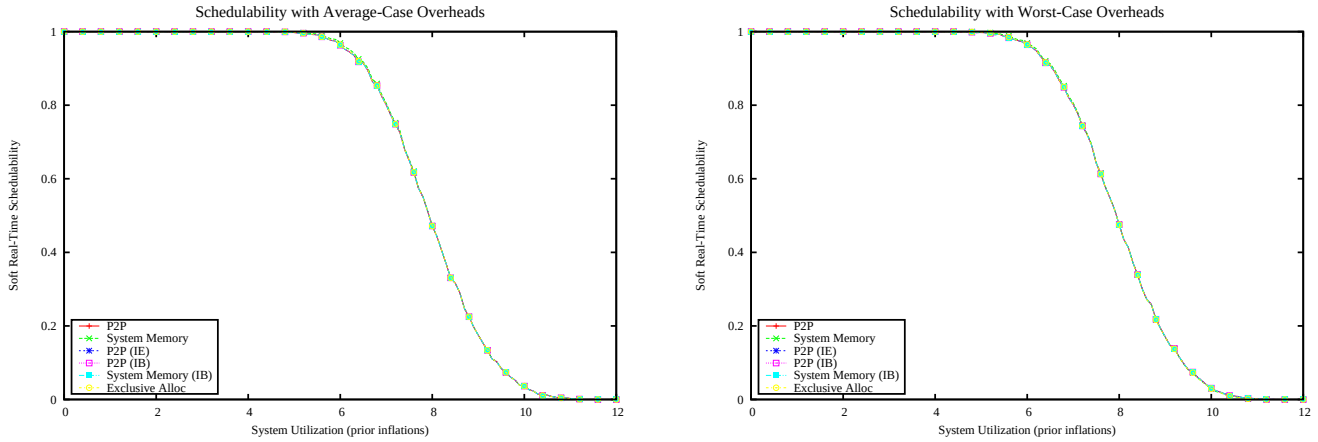

Figure 1728: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

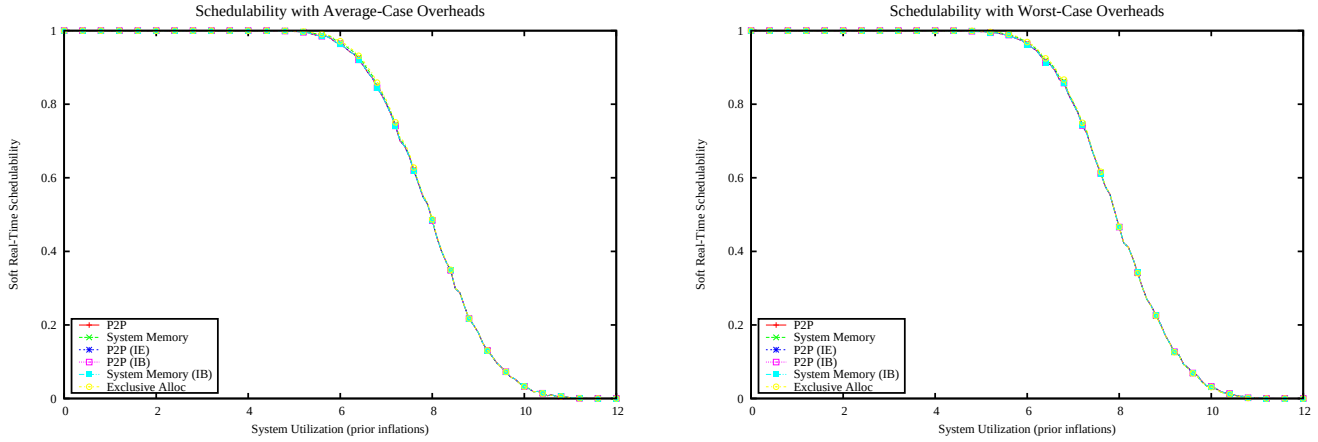

Figure 1729: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

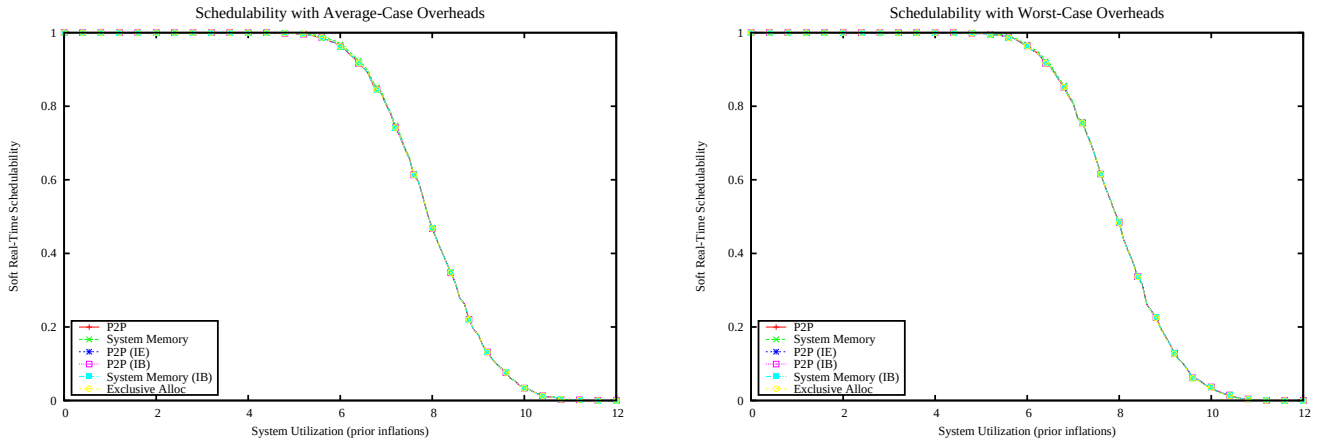

Figure 1730: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

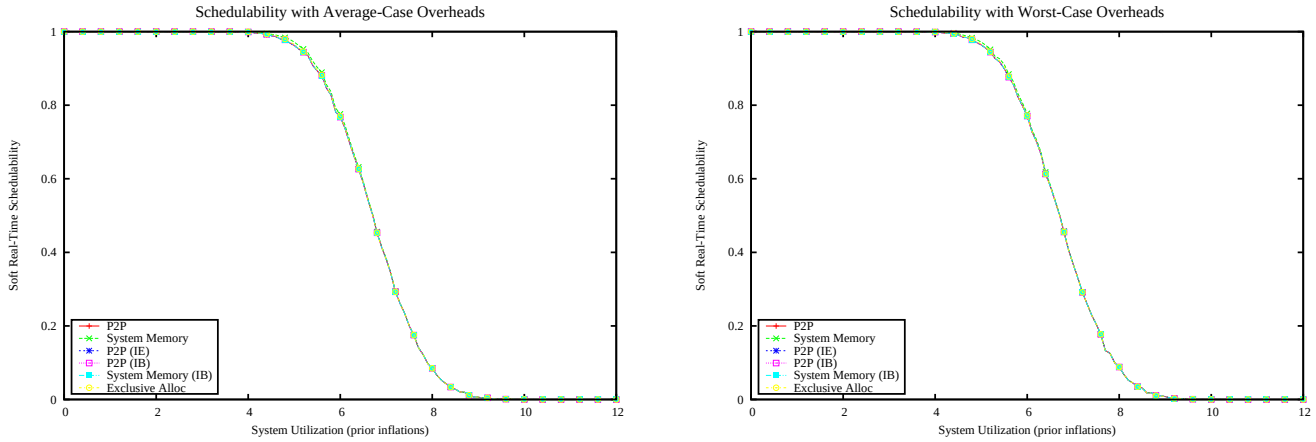

Figure 1731: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

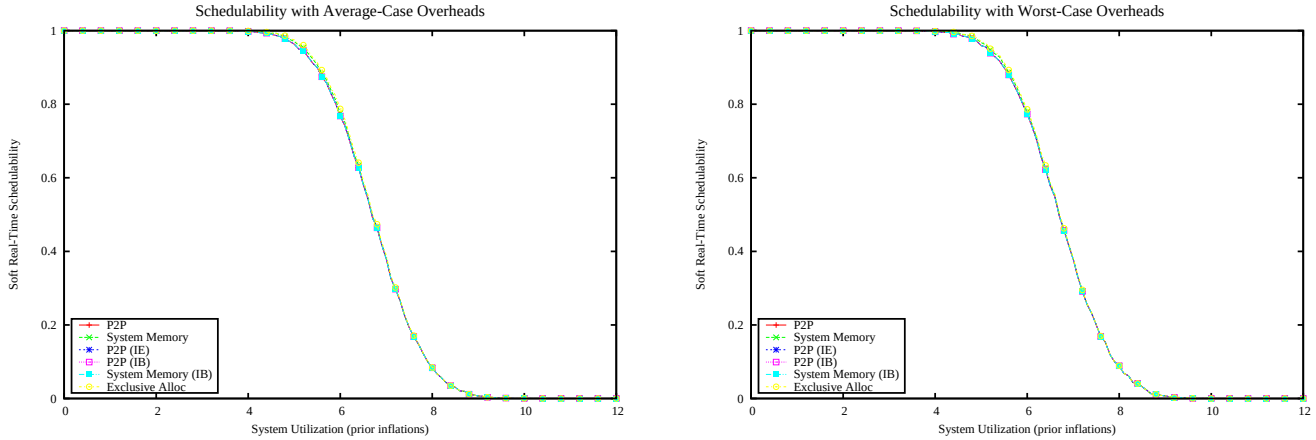

Figure 1732: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

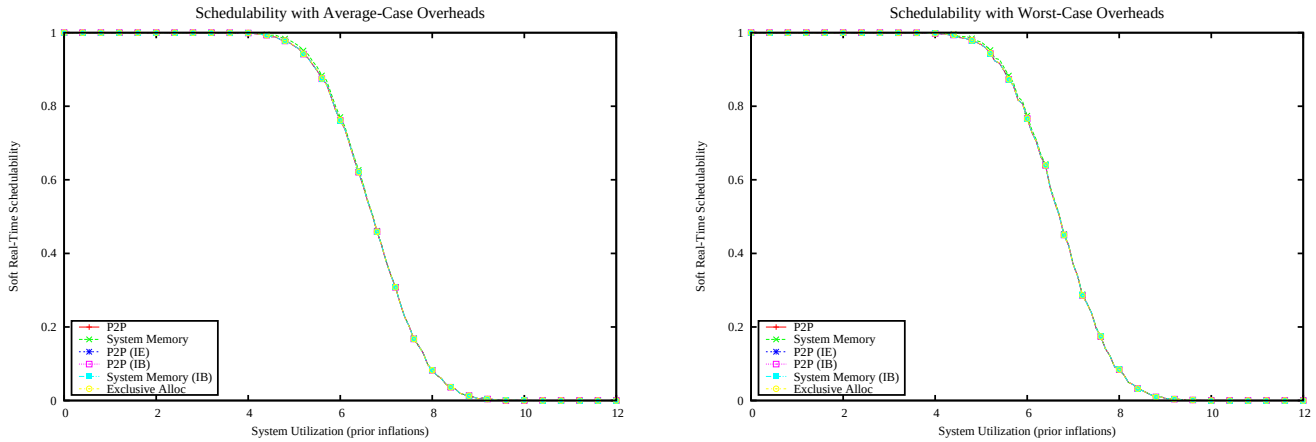

Figure 1733: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

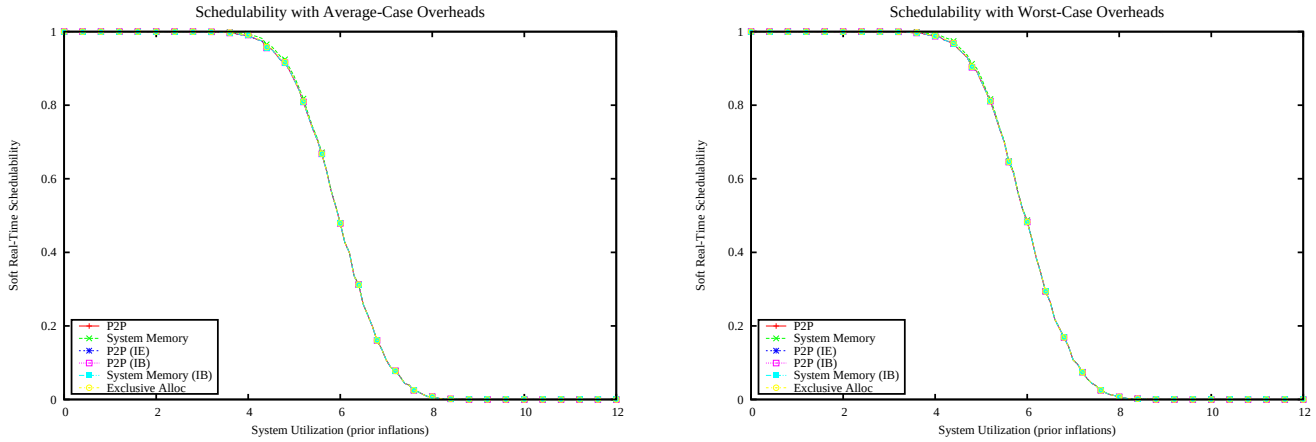

Figure 1734: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

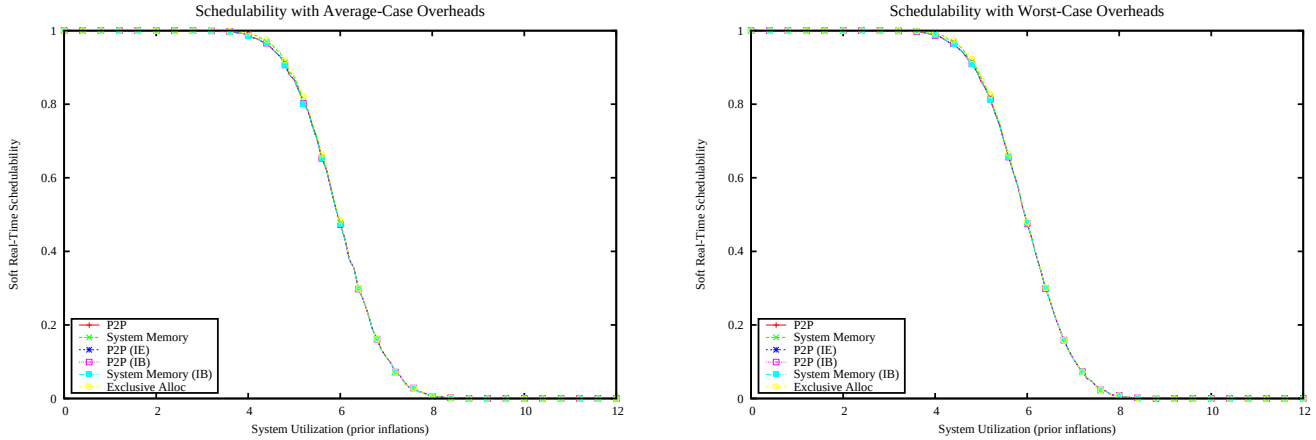

Figure 1735: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

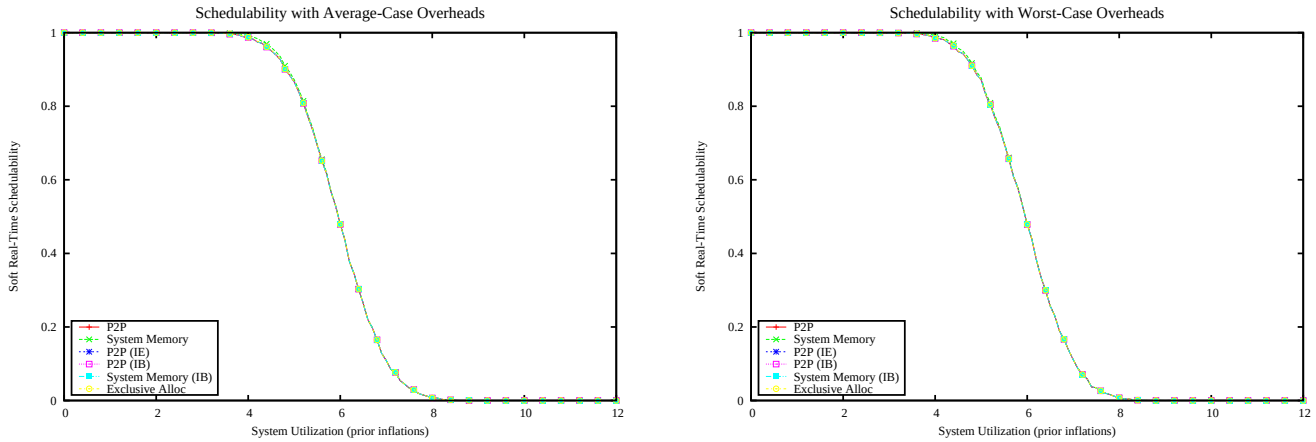

Figure 1736: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

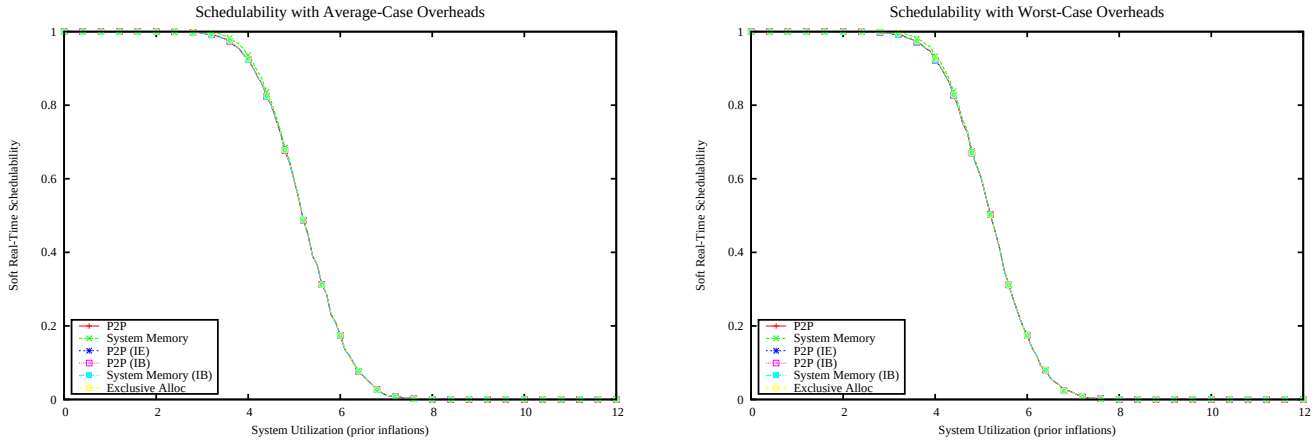

Figure 1737: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

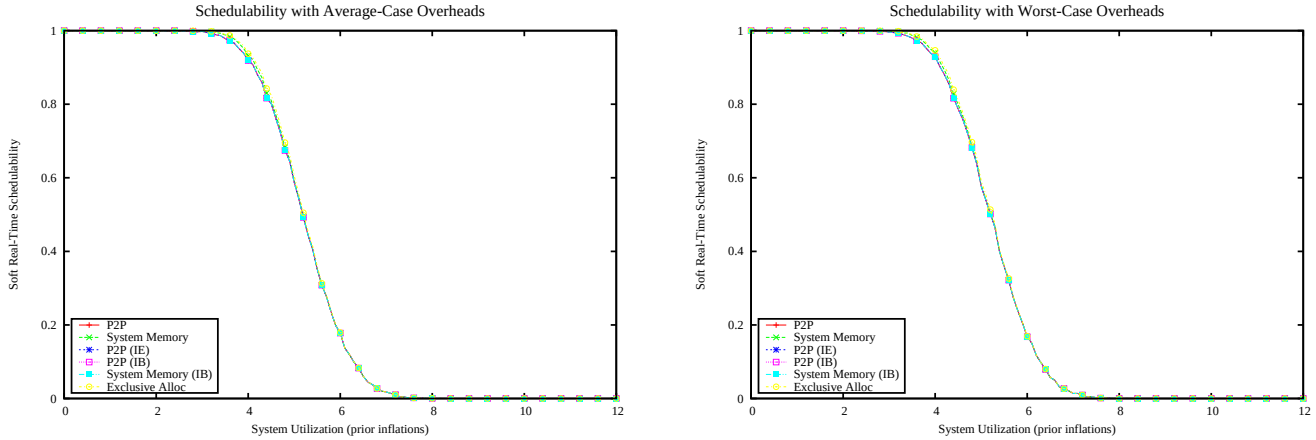

Figure 1738: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

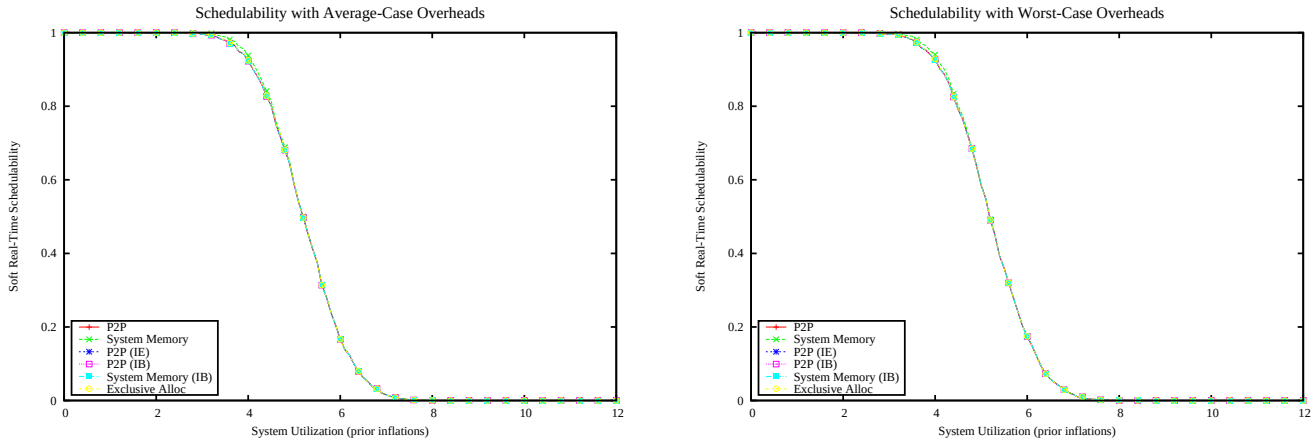

Figure 1739: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

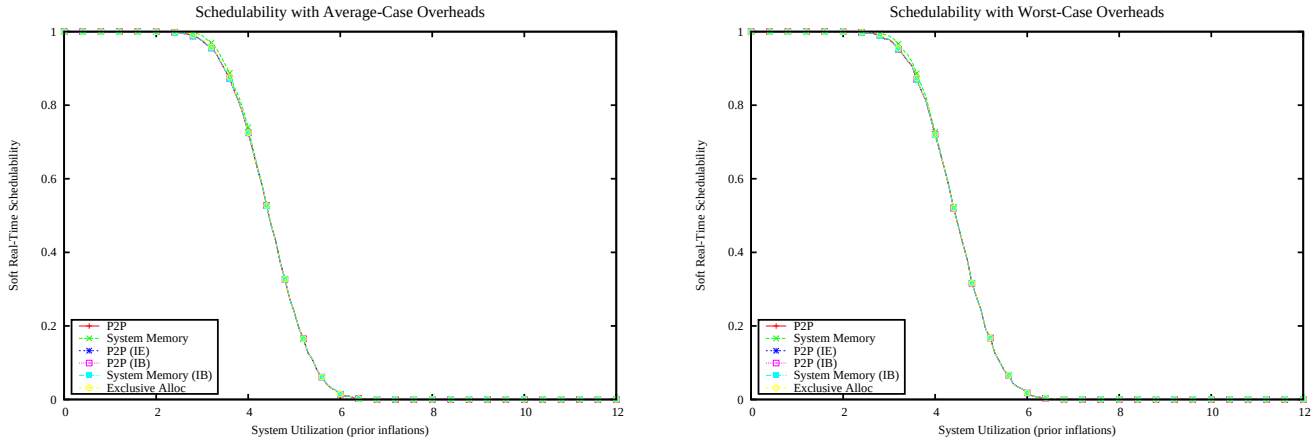

Figure 1740: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

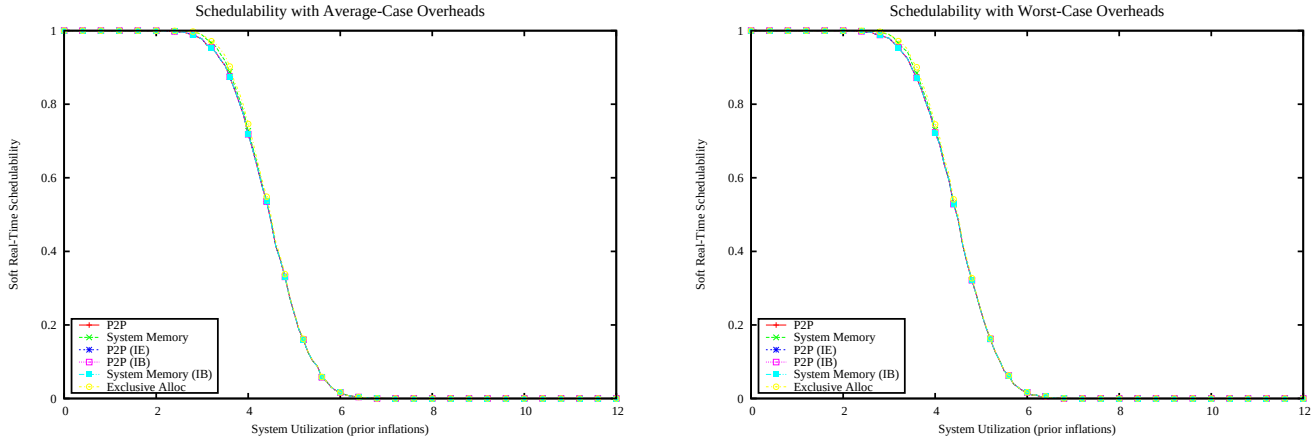

Figure 1741: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

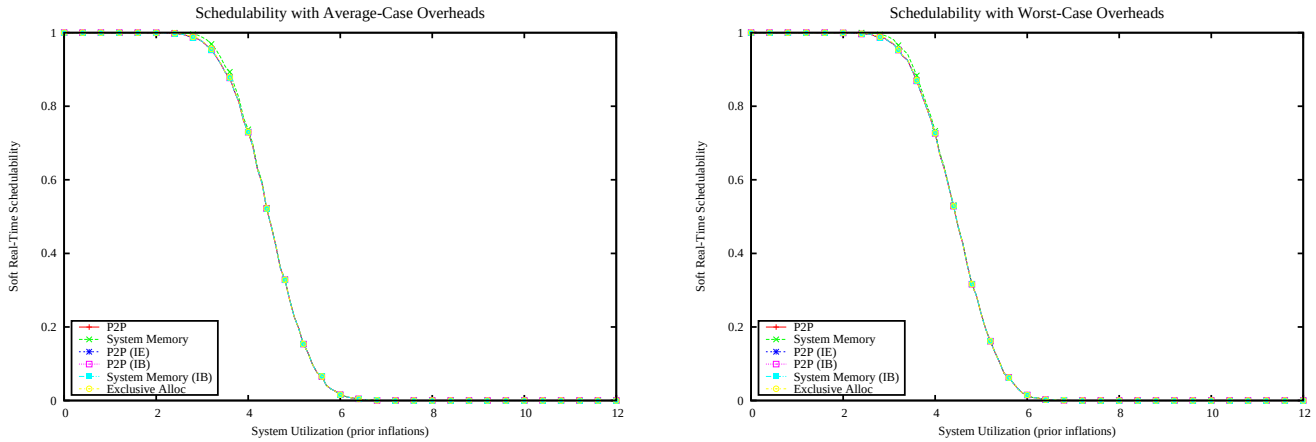

Figure 1742: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

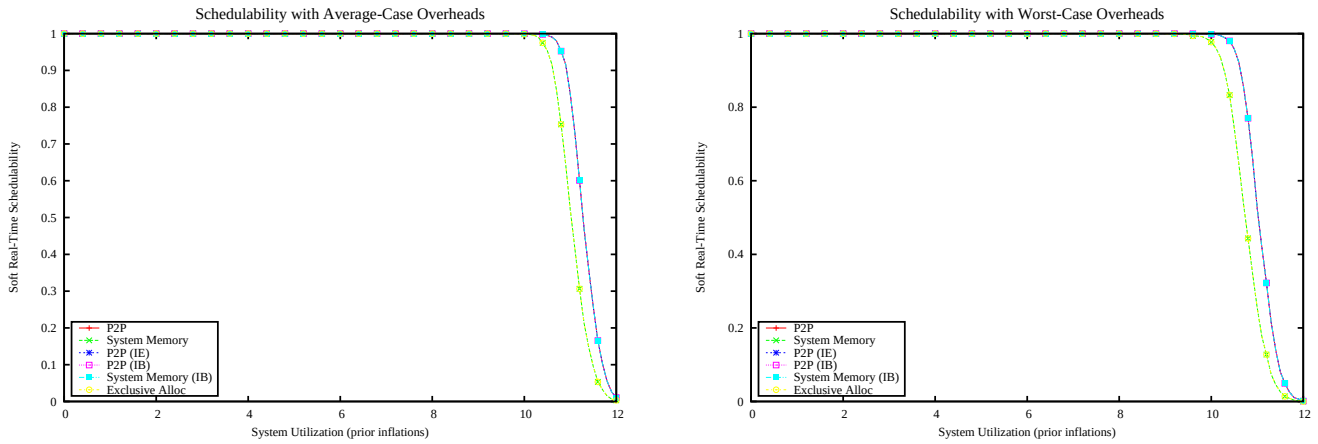

Figure 1743: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

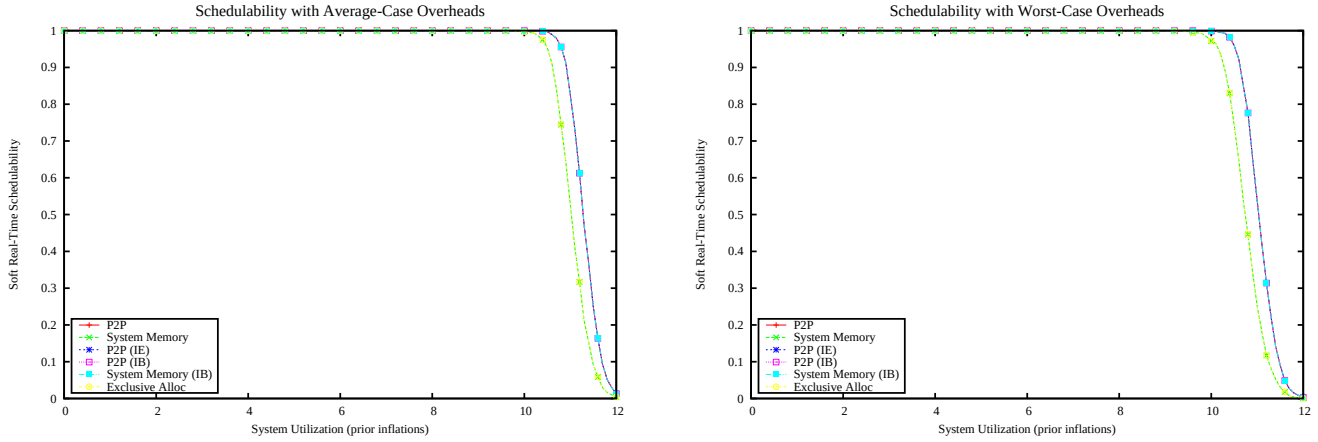

Figure 1744: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

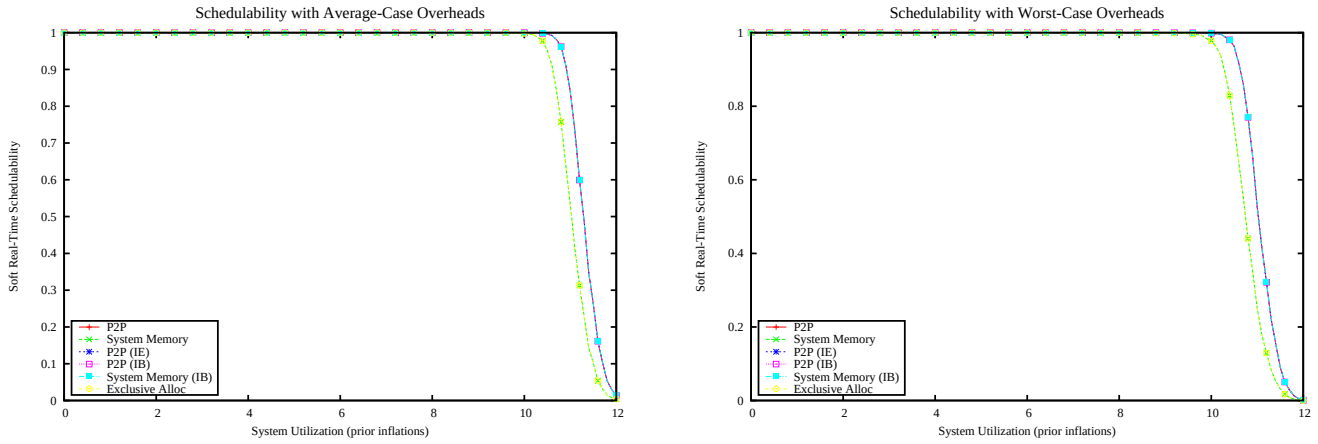

Figure 1745: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

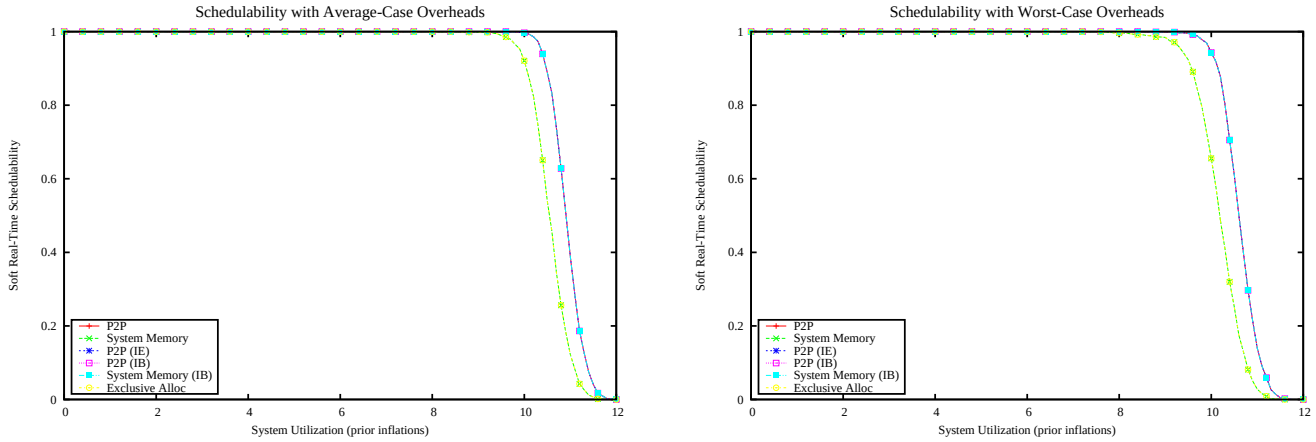

Figure 1746: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

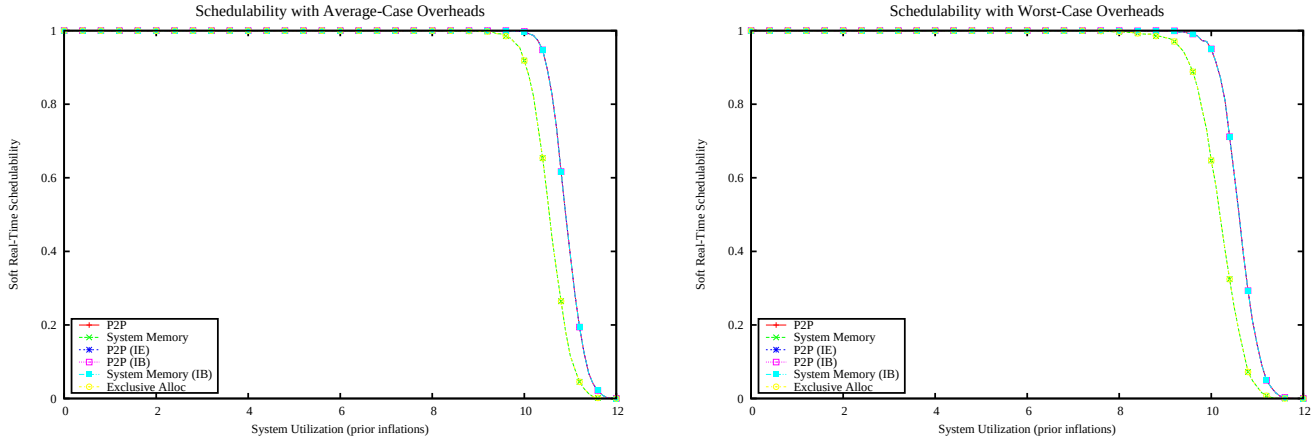

Figure 1747: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

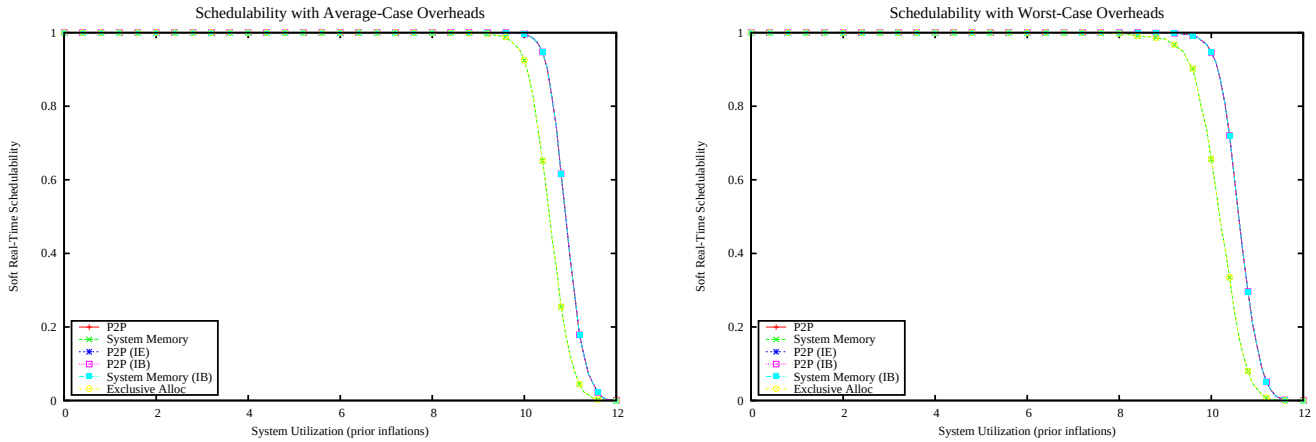

Figure 1748: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

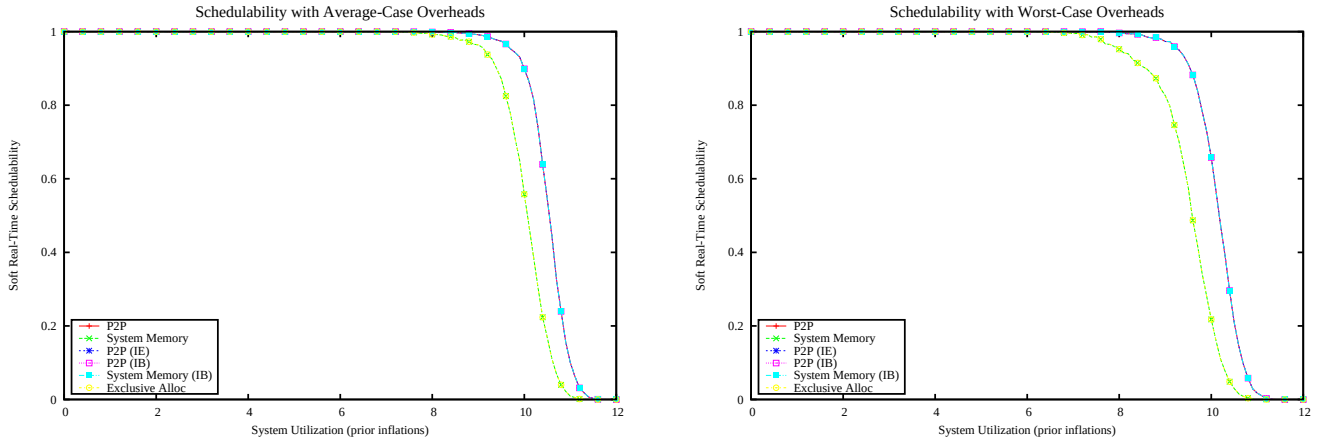

Figure 1749: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

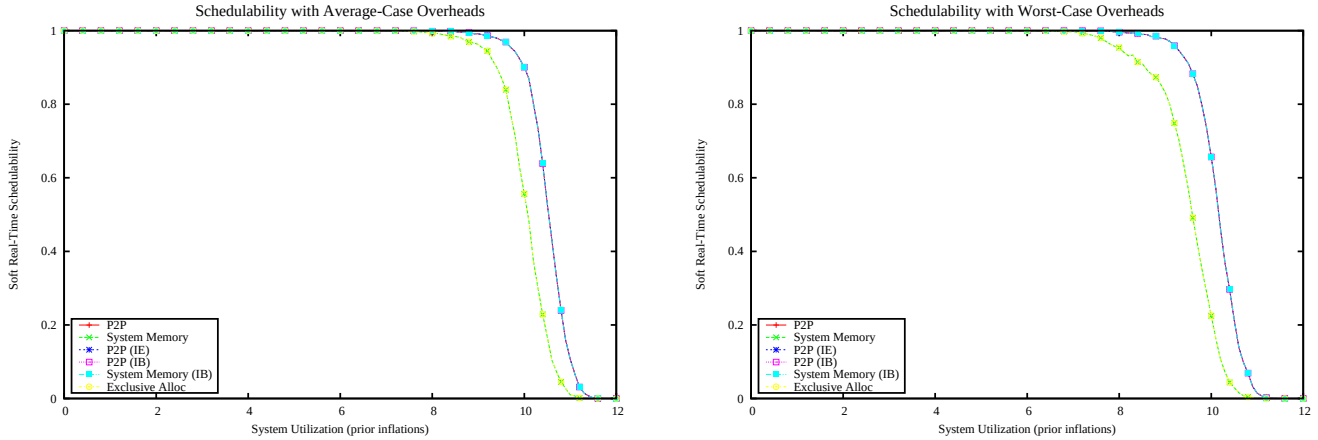

Figure 1750: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

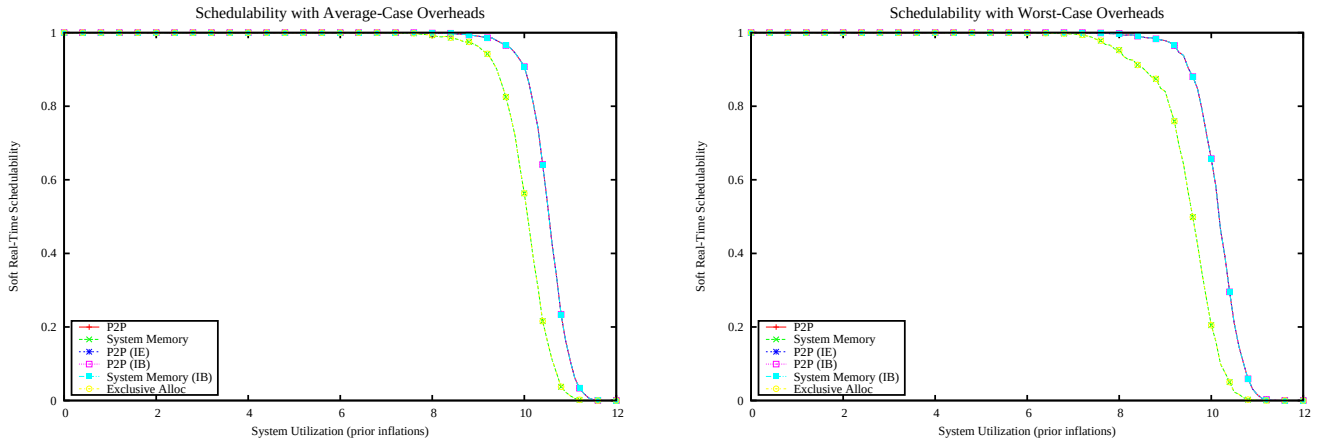

Figure 1751: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

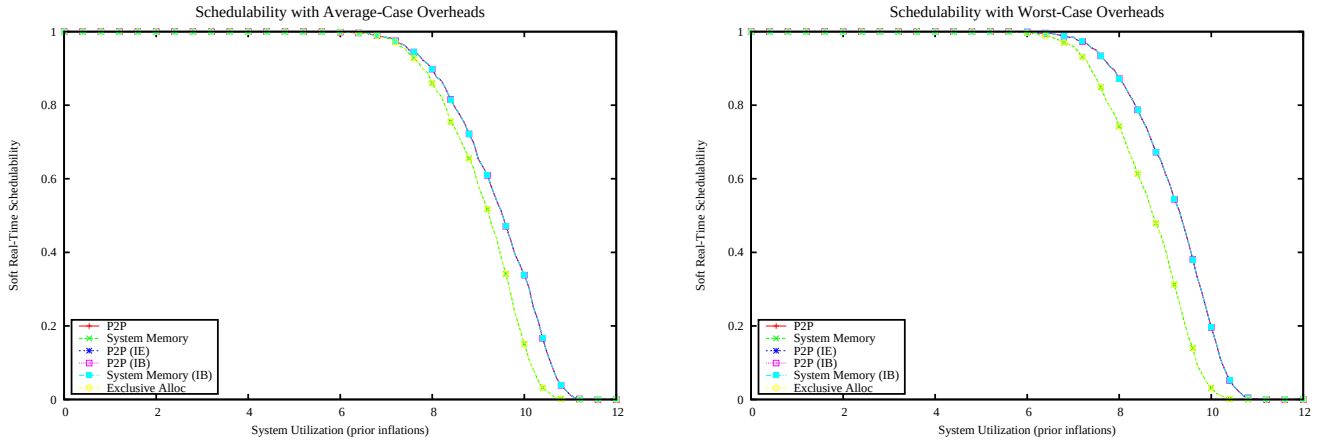

Figure 1752: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

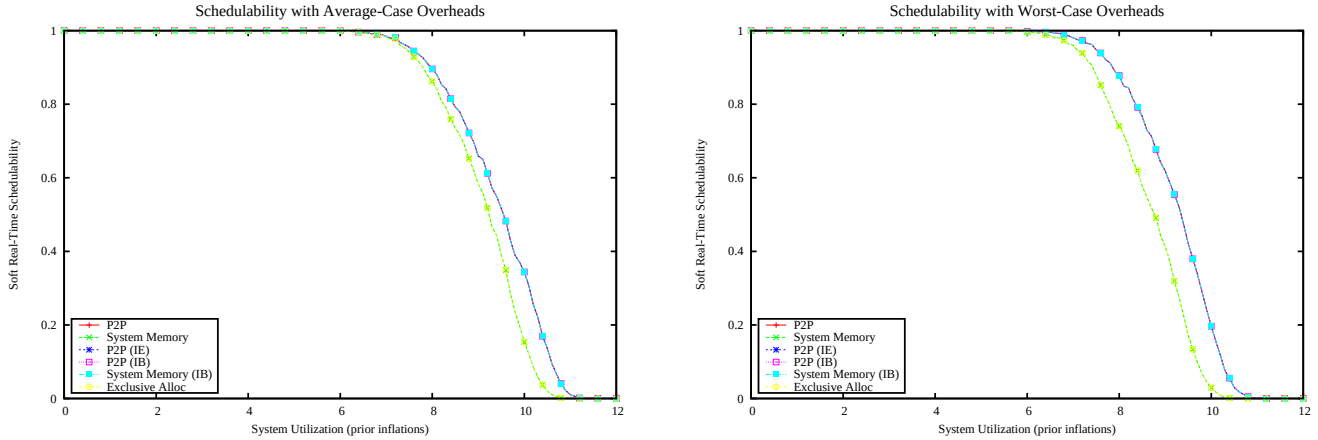

Figure 1753: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

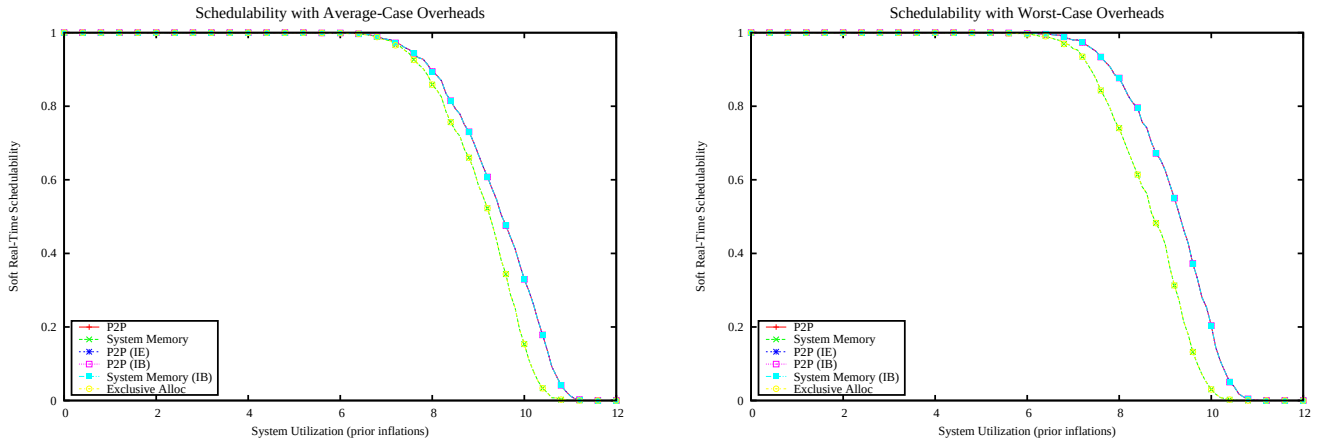

Figure 1754: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

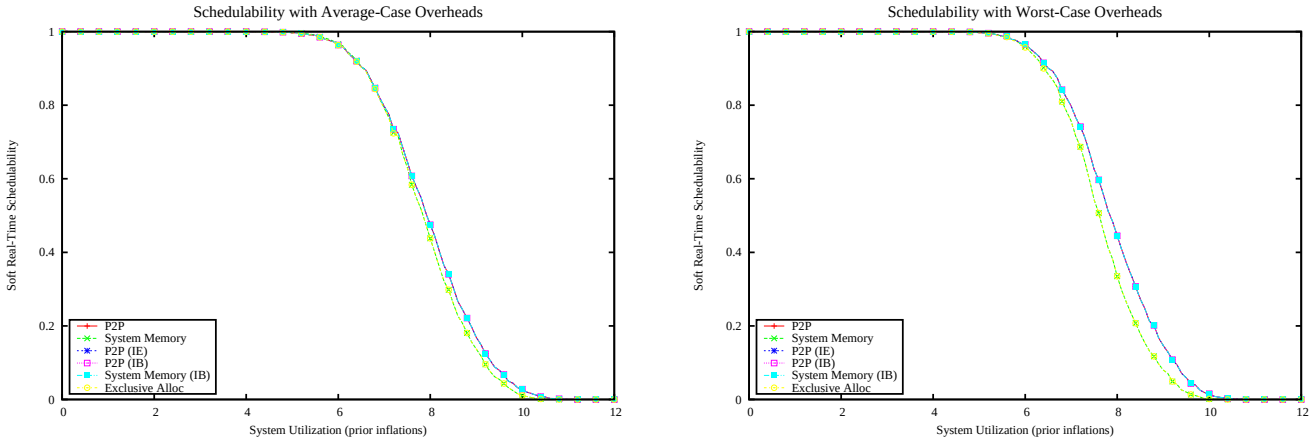

Figure 1755: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

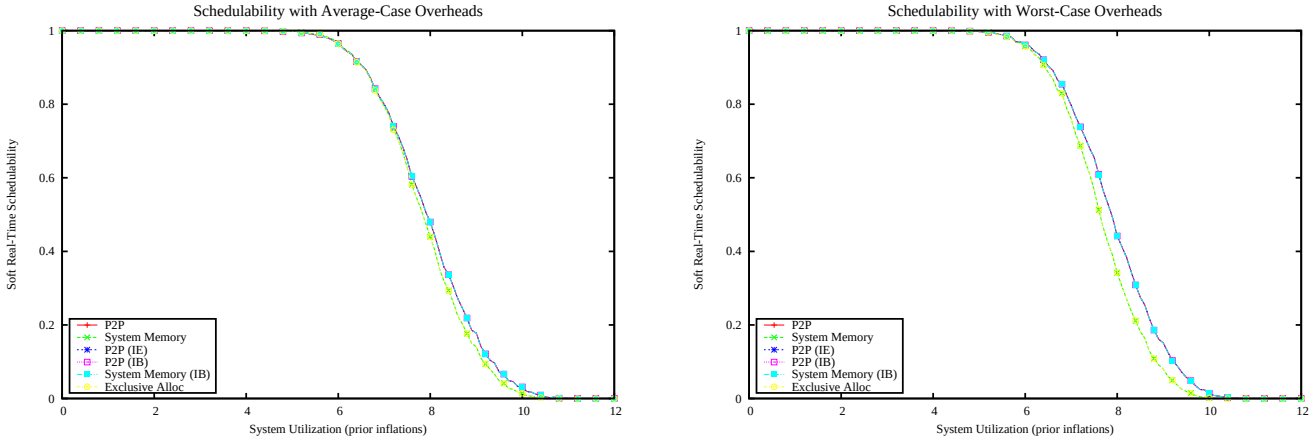

Figure 1756: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

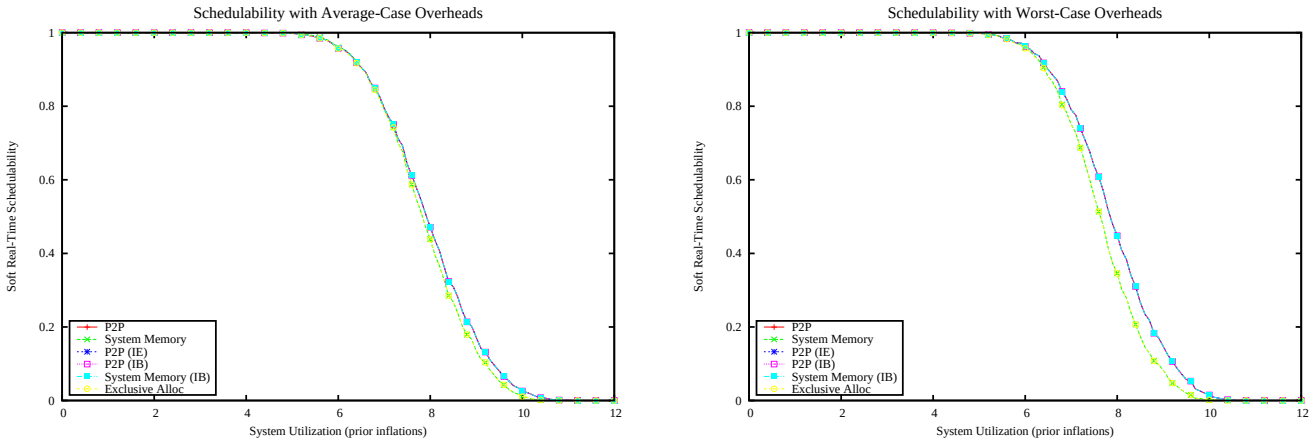

Figure 1757: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

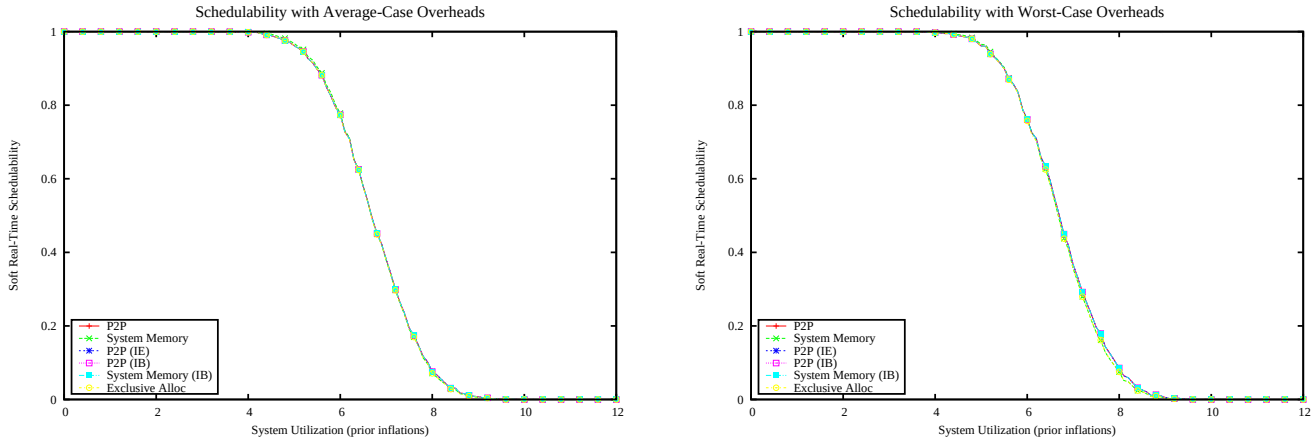

Figure 1758: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

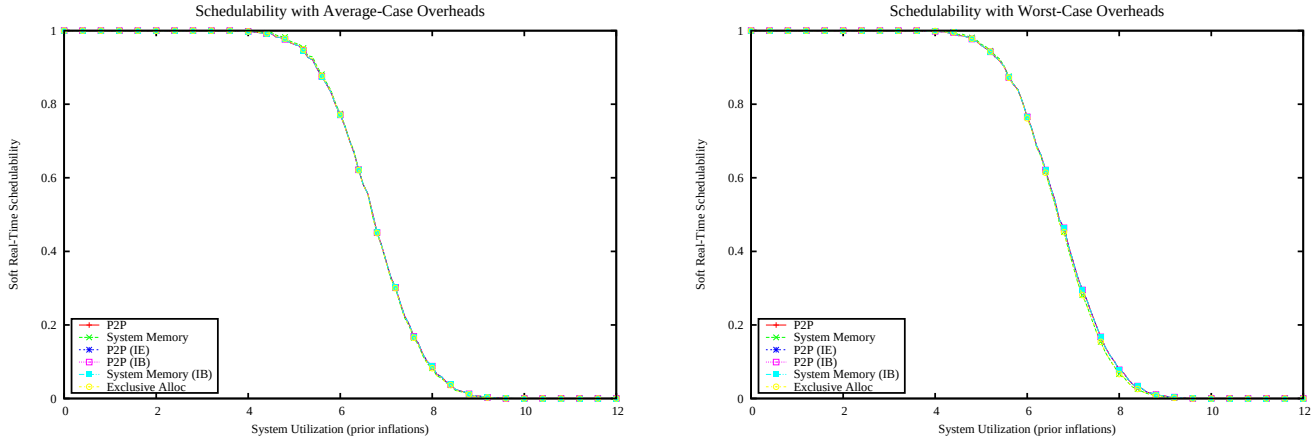

Figure 1759: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

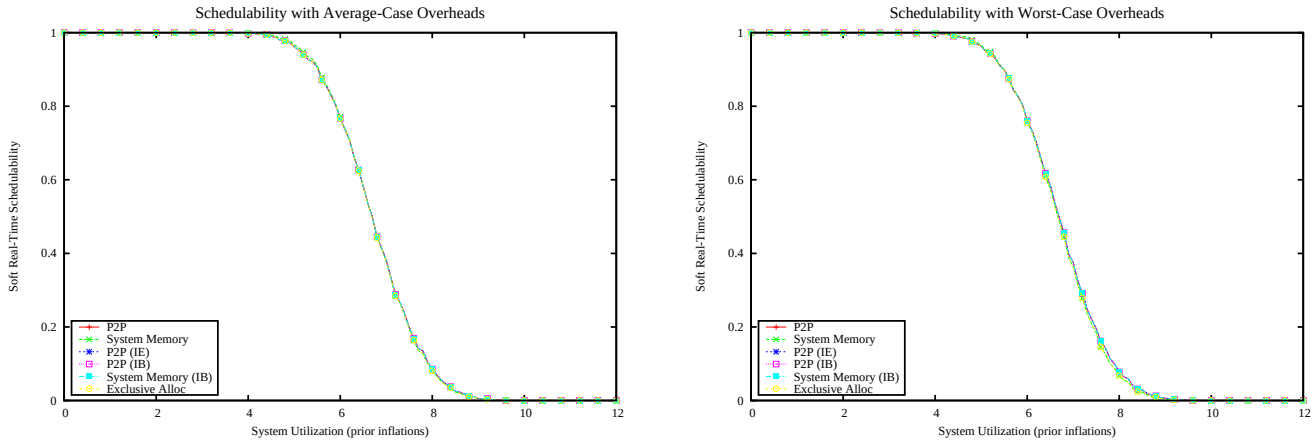

Figure 1760: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

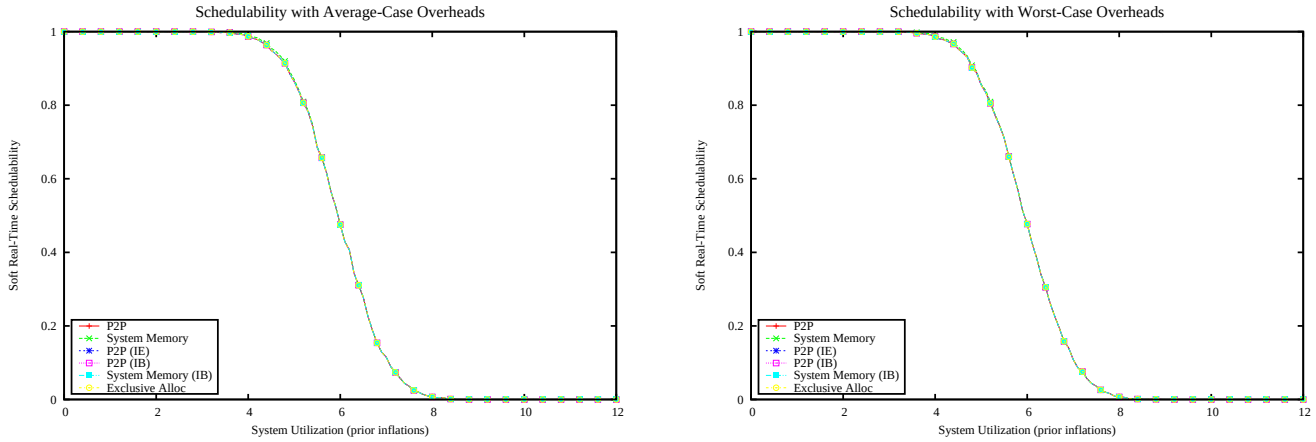

Figure 1761: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

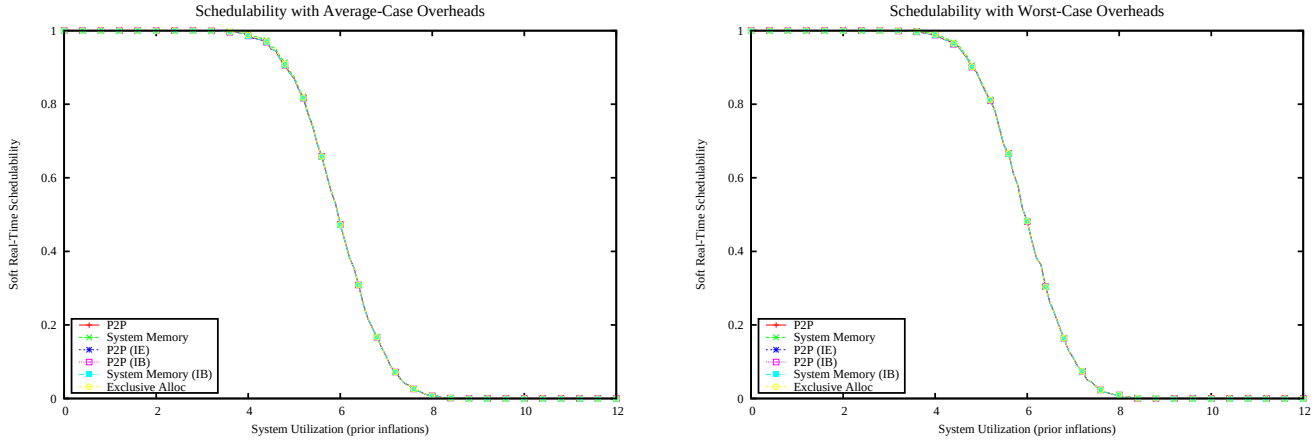

Figure 1762: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

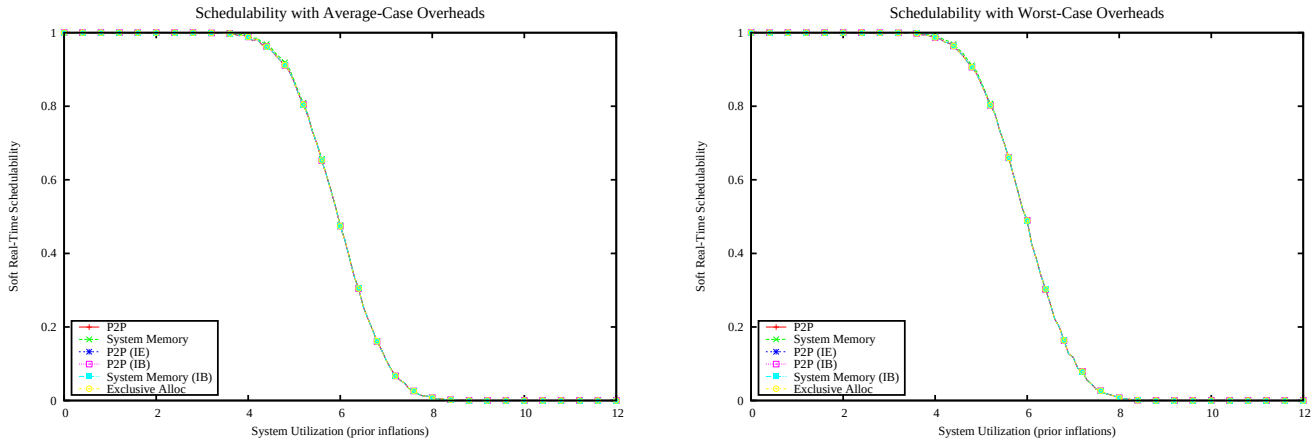

Figure 1763: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

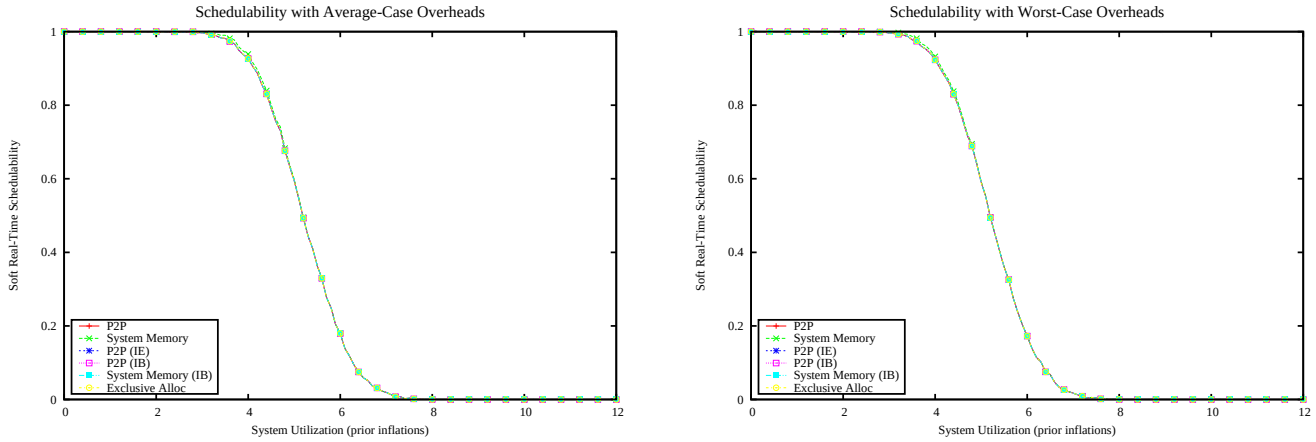

Figure 1764: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

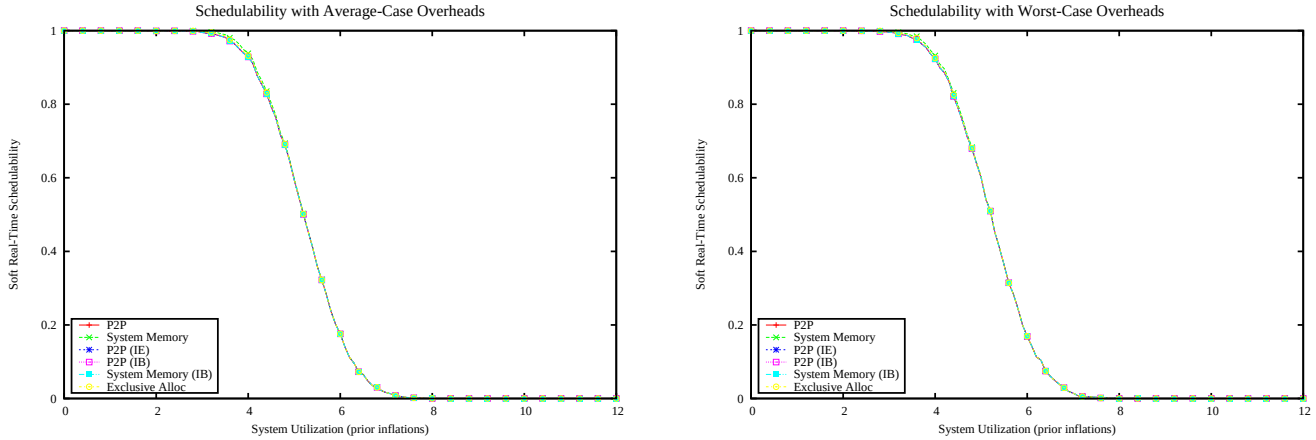

Figure 1765: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

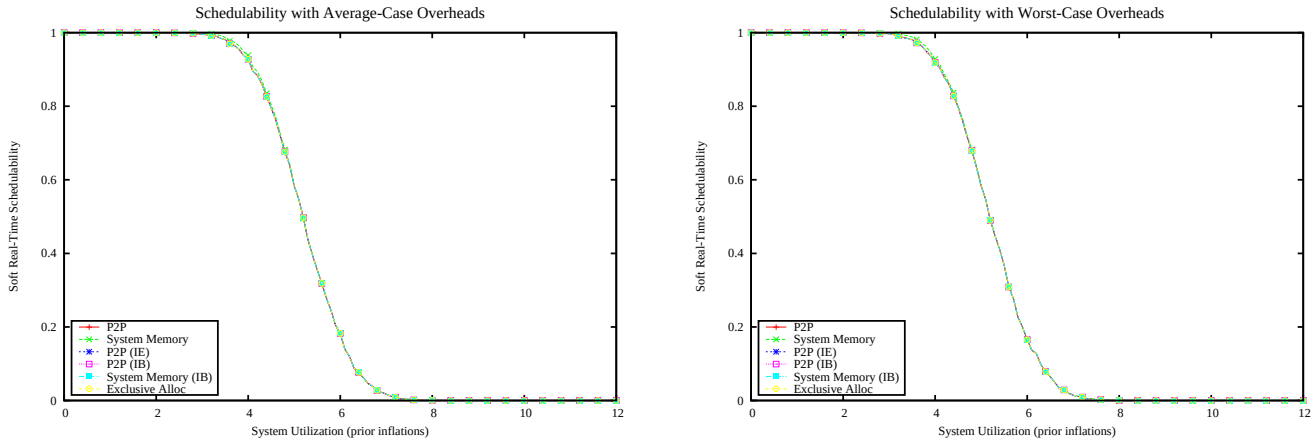

Figure 1766: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

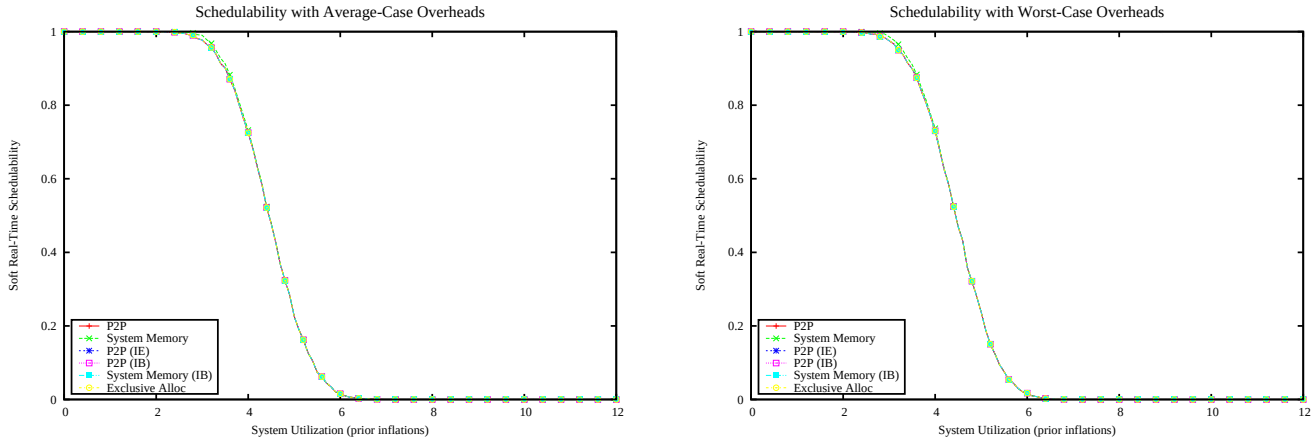

Figure 1767: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

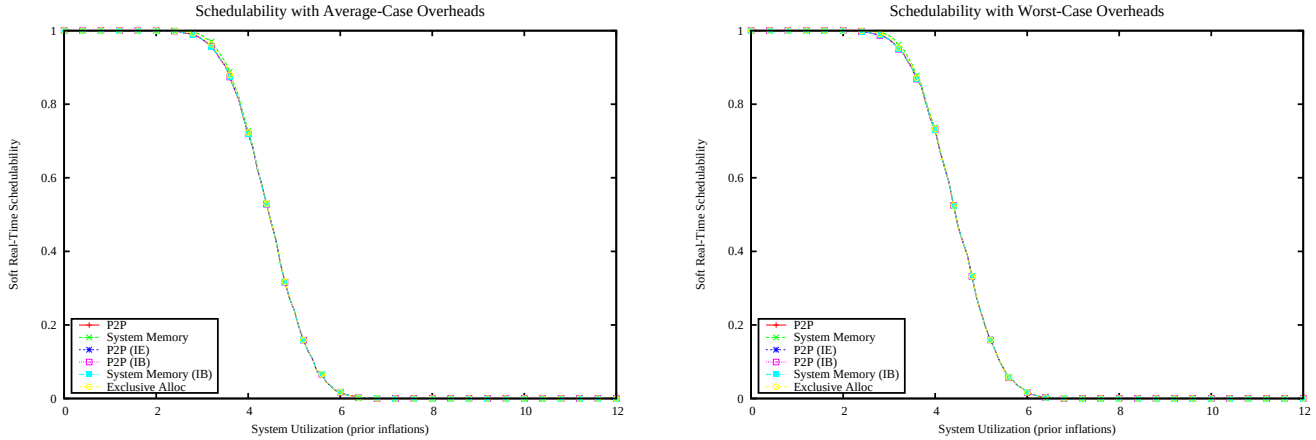

Figure 1768: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

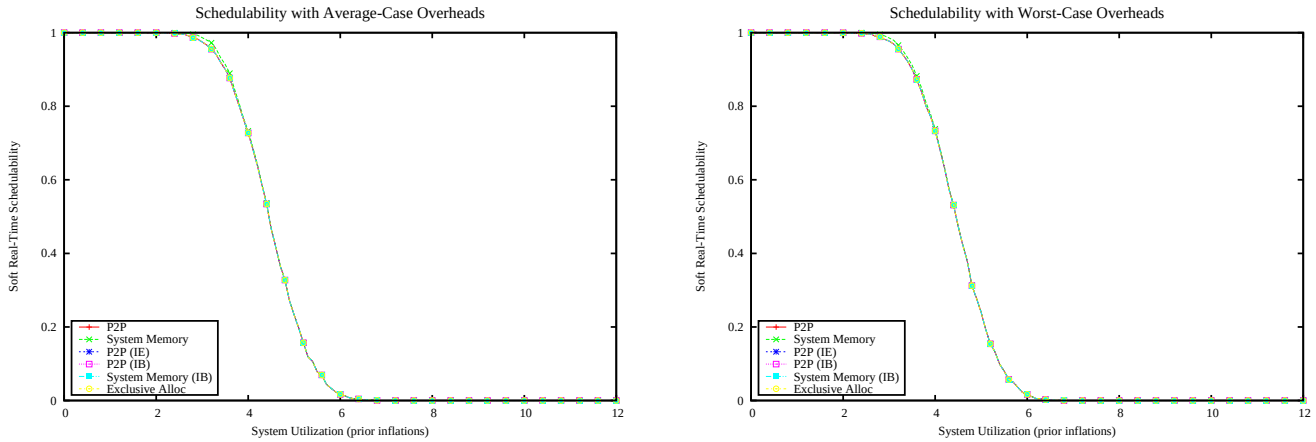

Figure 1769: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

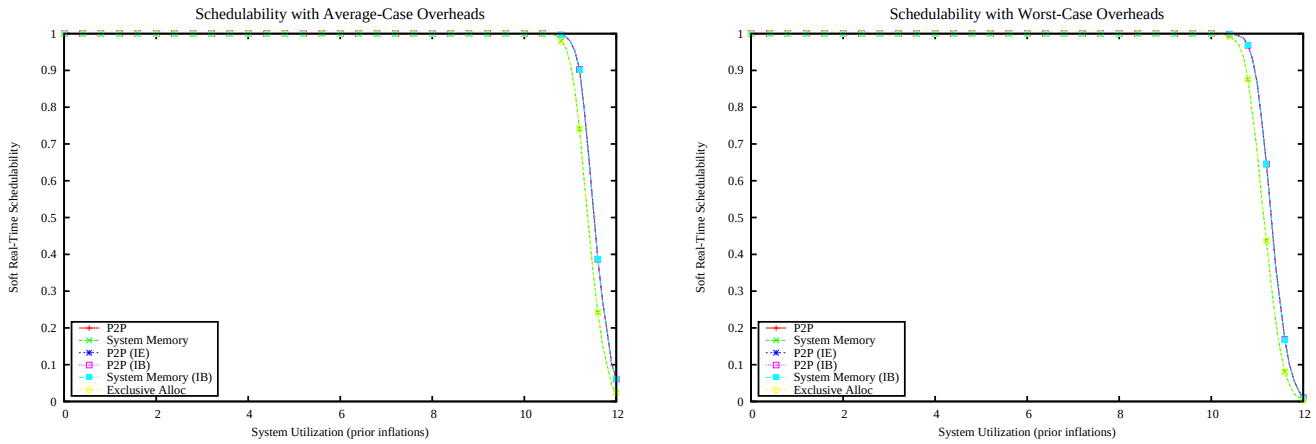

Figure 1770: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

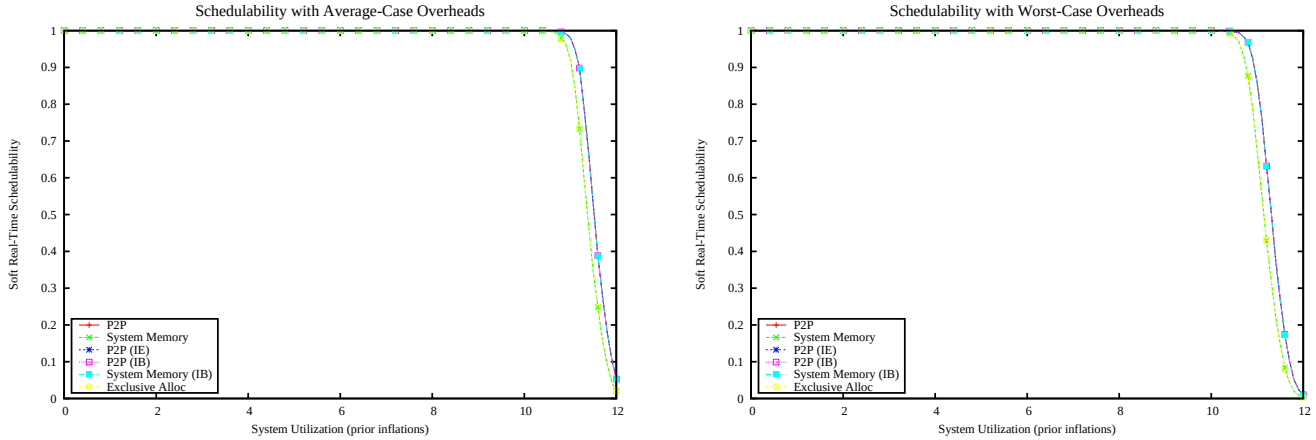

Figure 1771: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

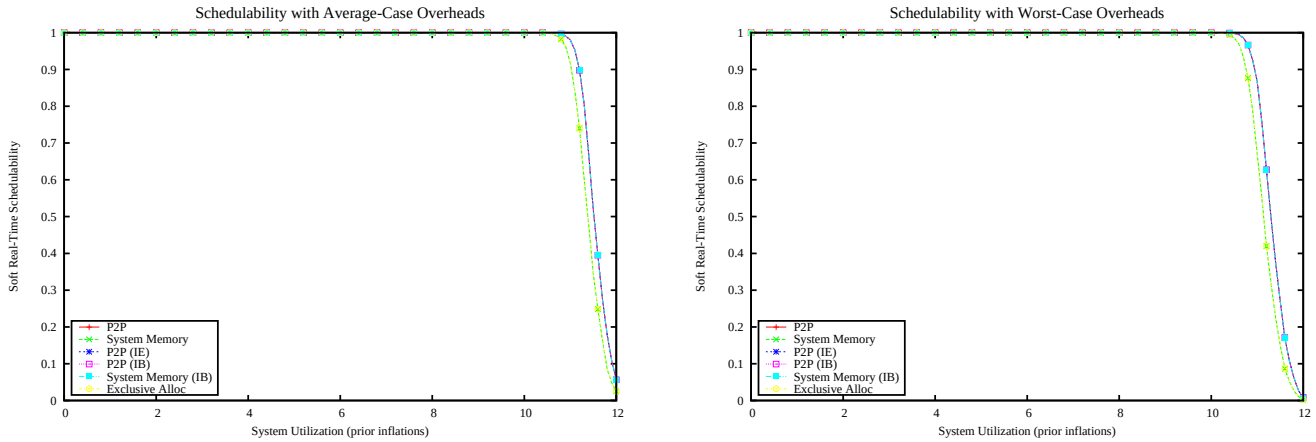

Figure 1772: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

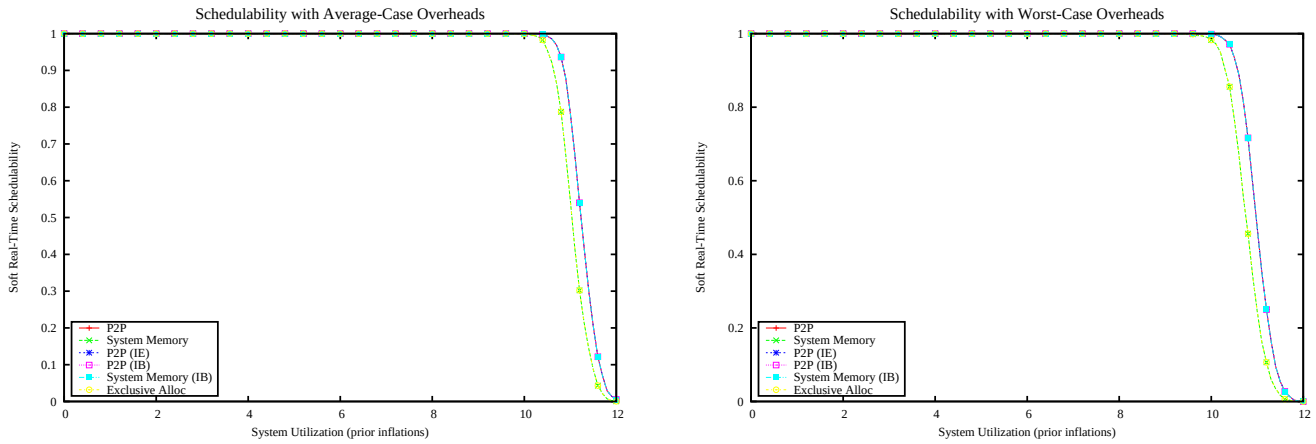

Figure 1773: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

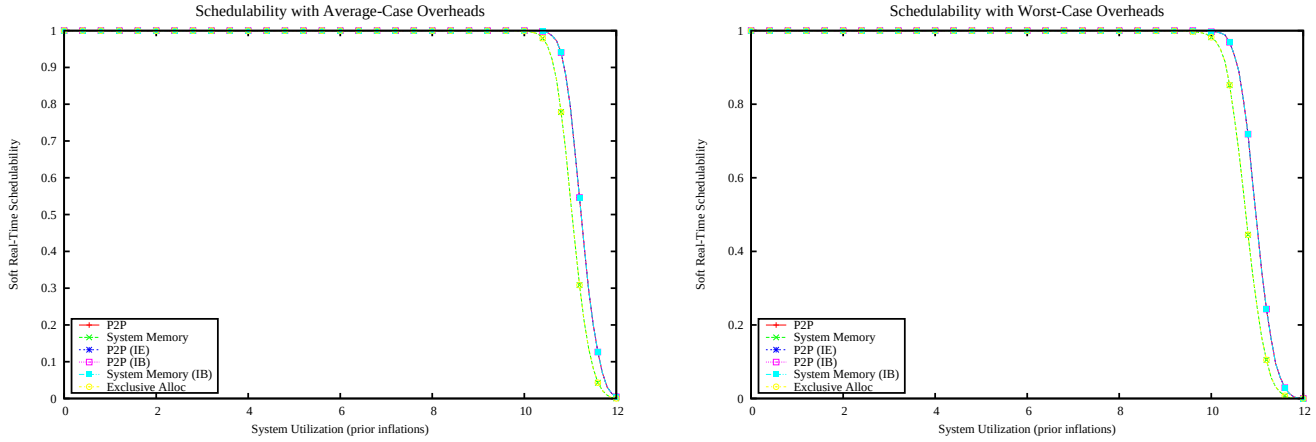

Figure 1774: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

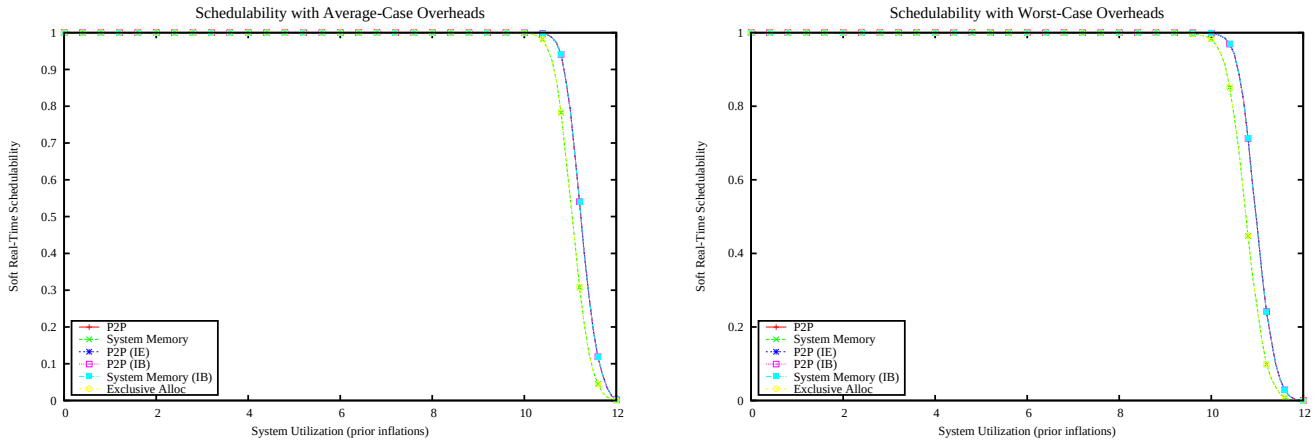

Figure 1775: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

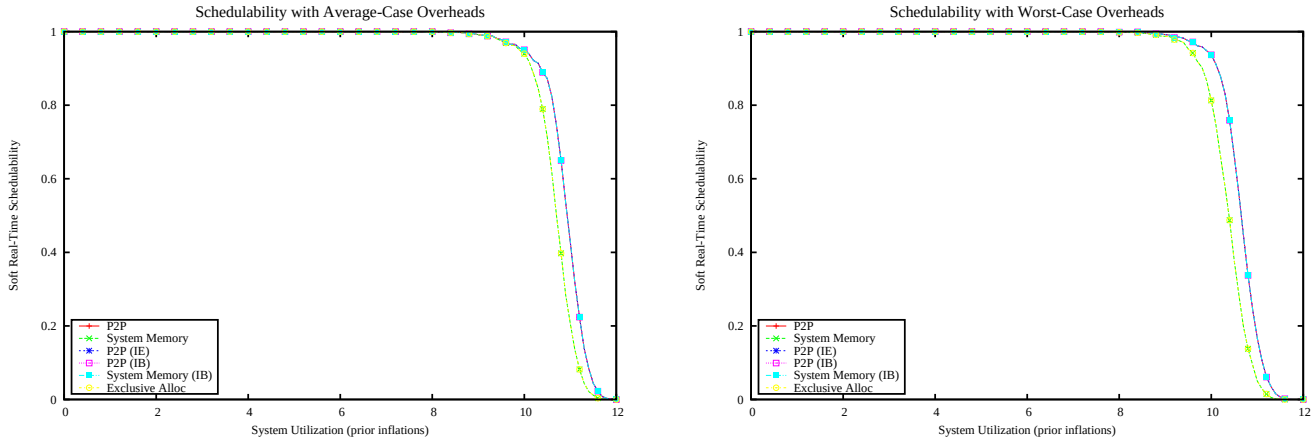

Figure 1776: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

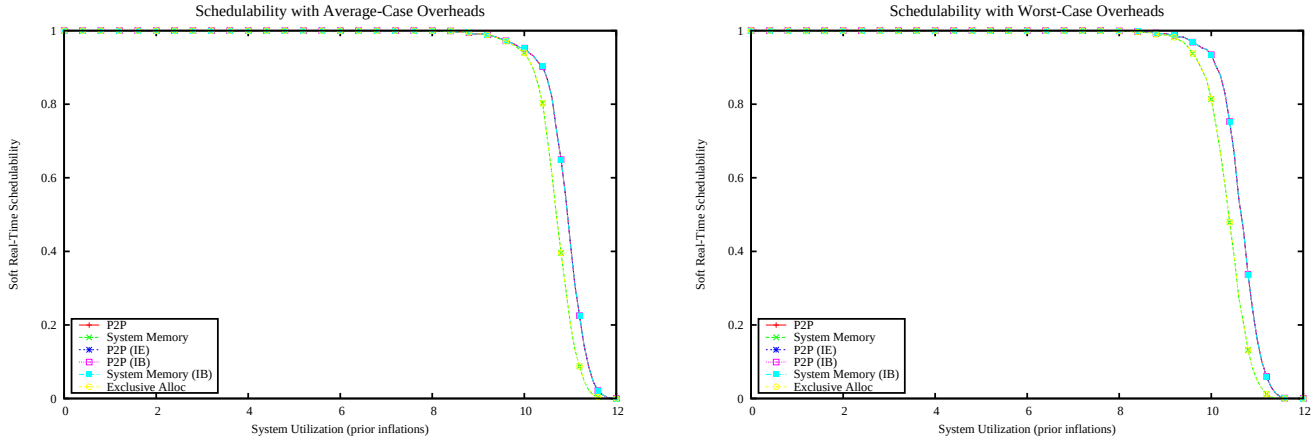

Figure 1777: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

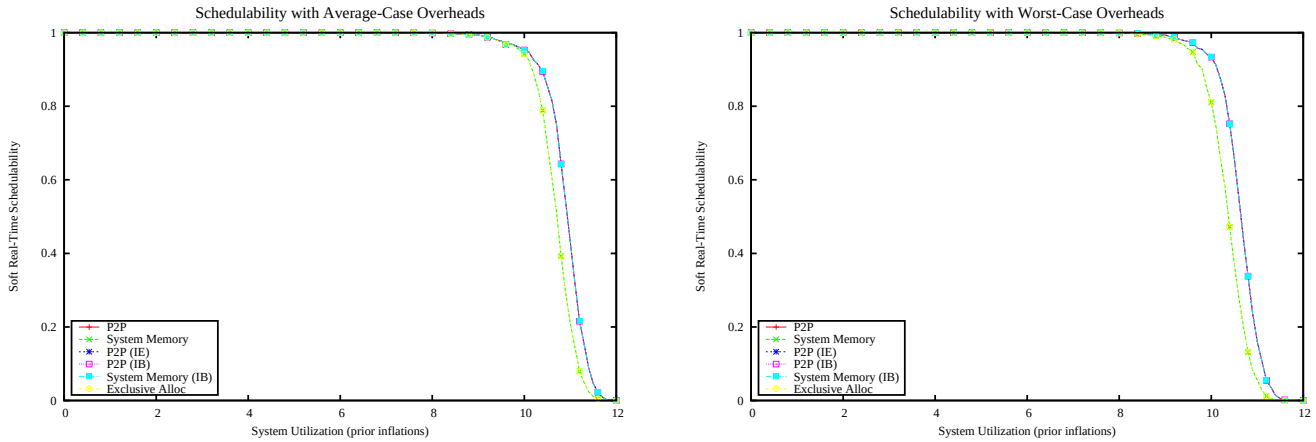

Figure 1778: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

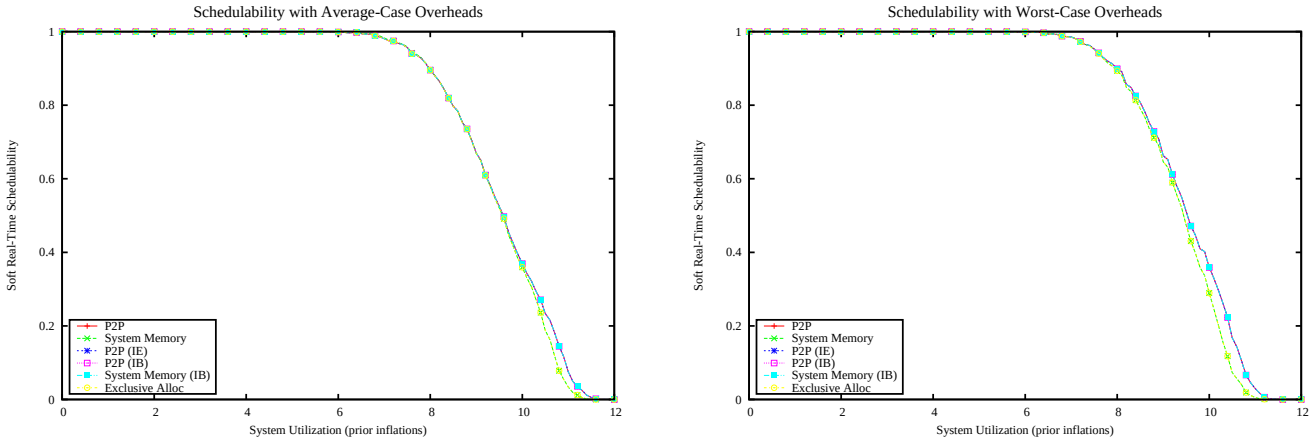

Figure 1779: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

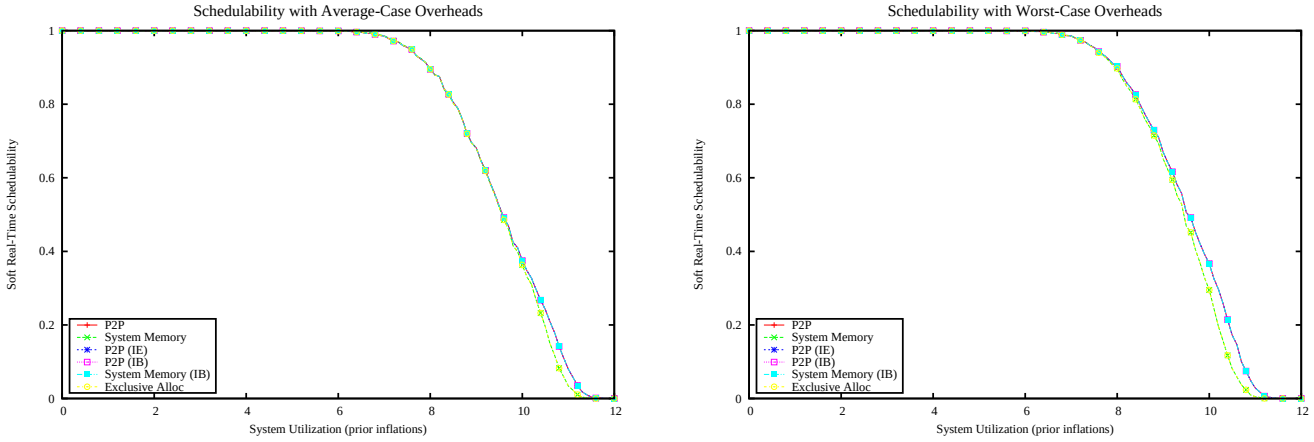

Figure 1780: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

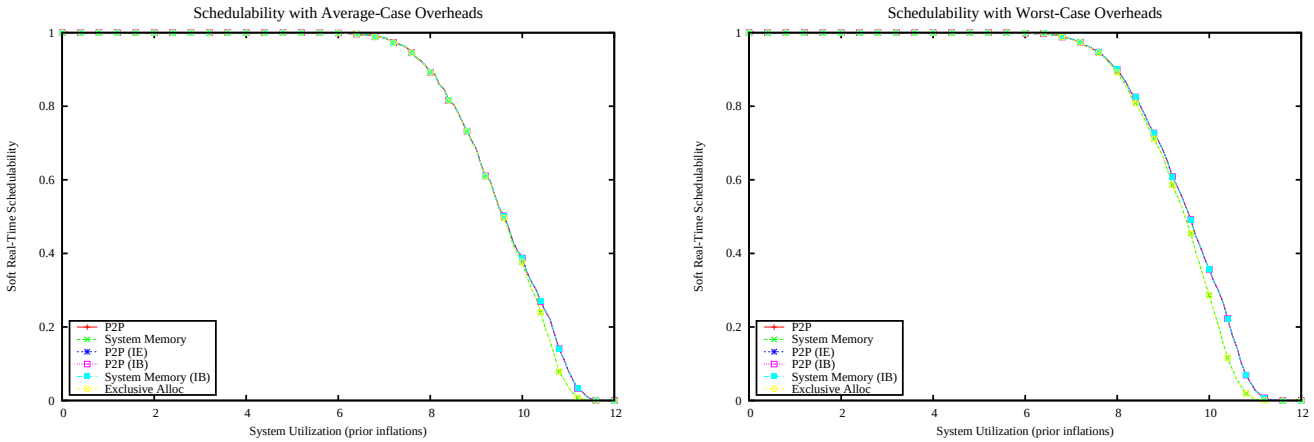

Figure 1781: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

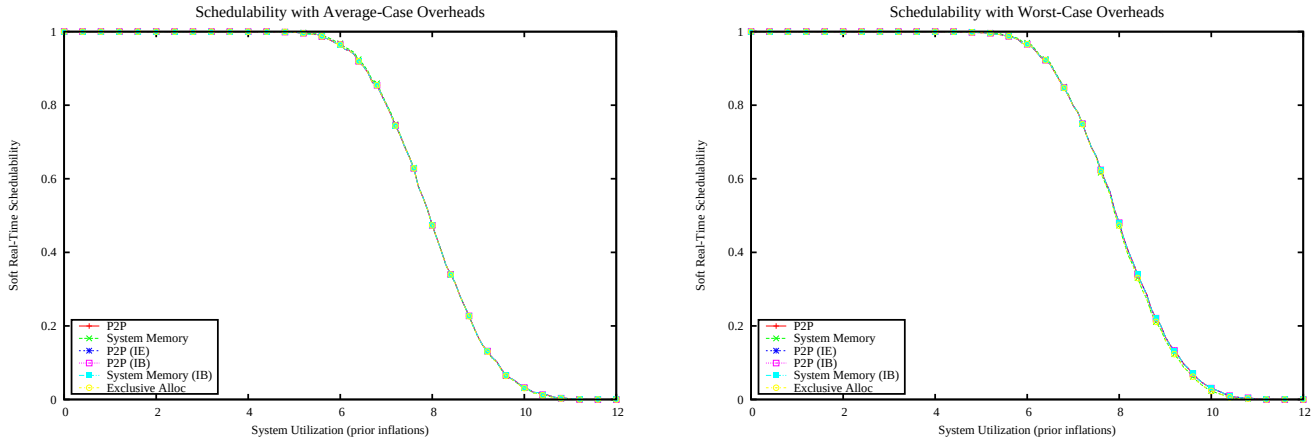

Figure 1782: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

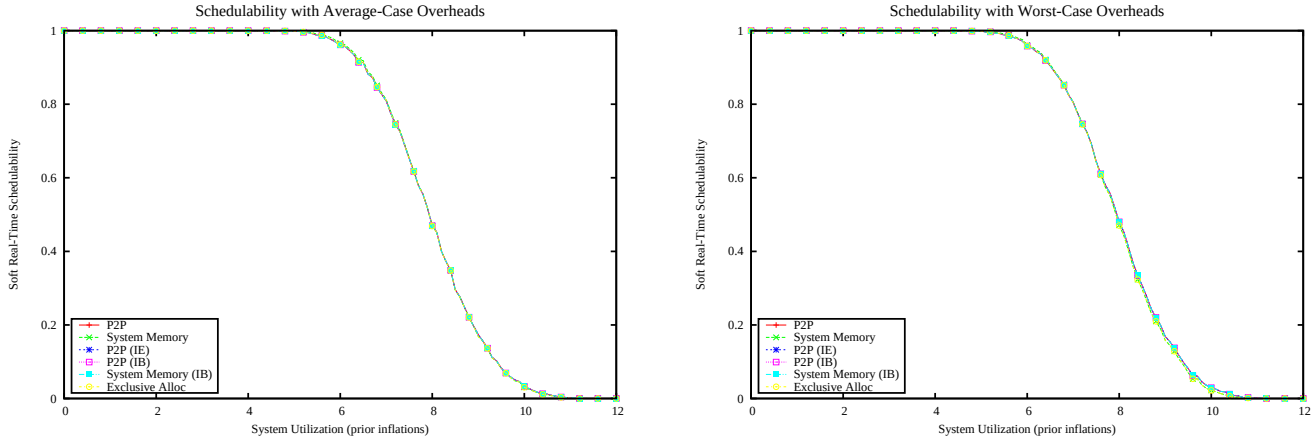

Figure 1783: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

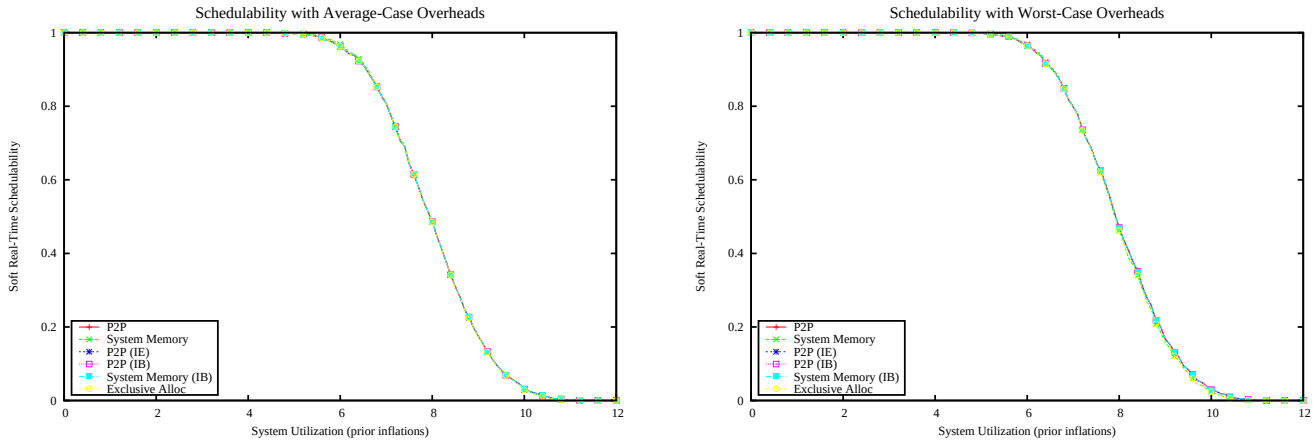

Figure 1784: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

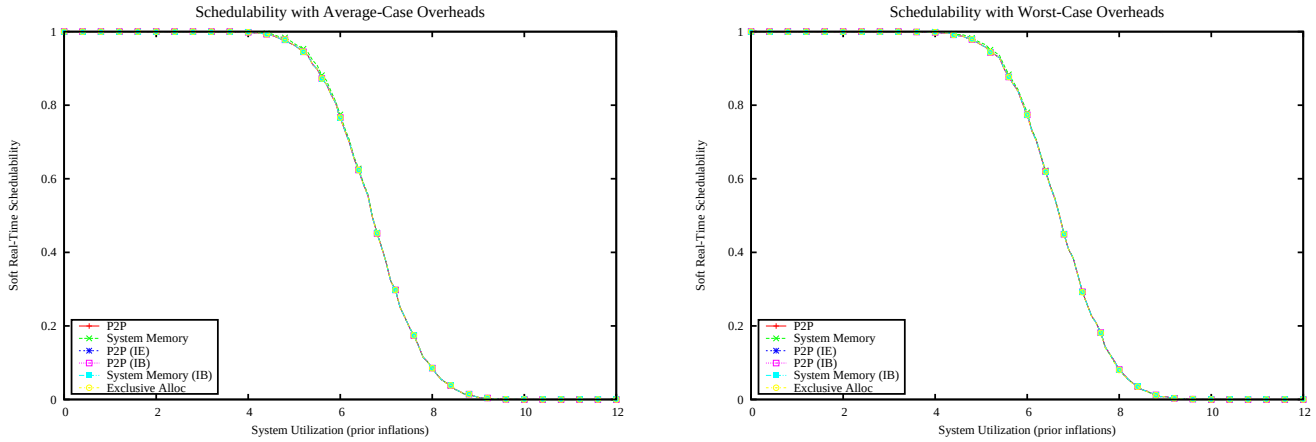

Figure 1785: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

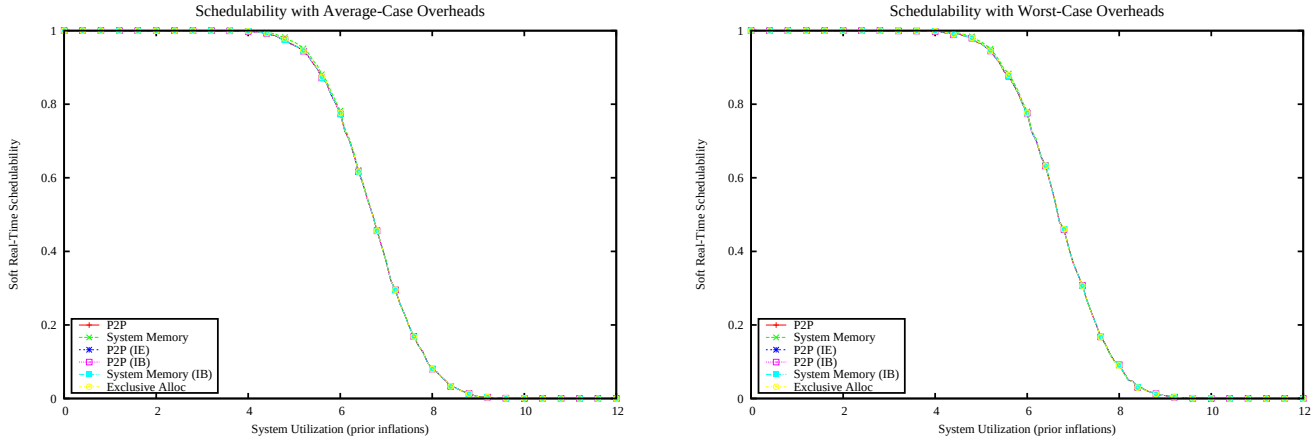

Figure 1786: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

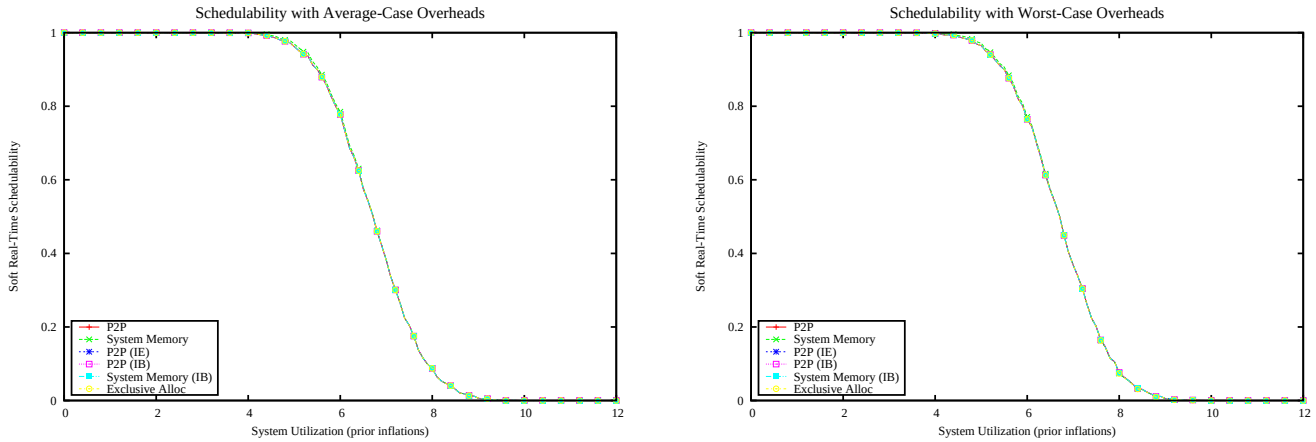

Figure 1787: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

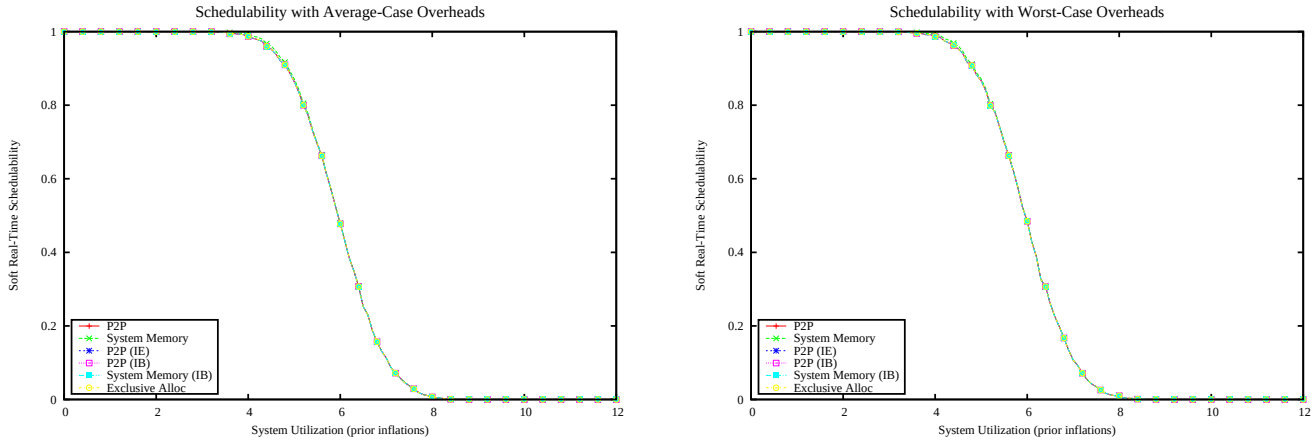

Figure 1788: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

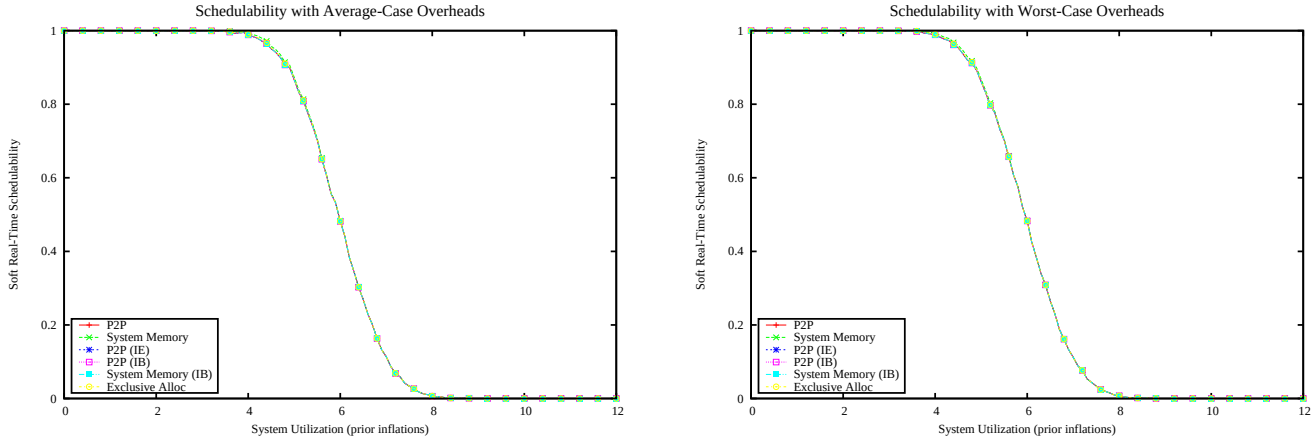

Figure 1789: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

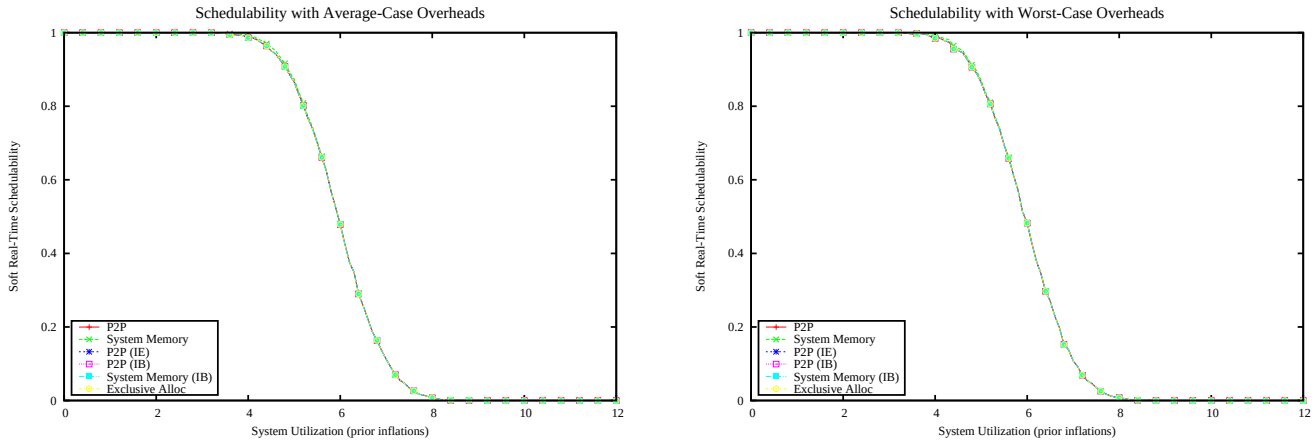

Figure 1790: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

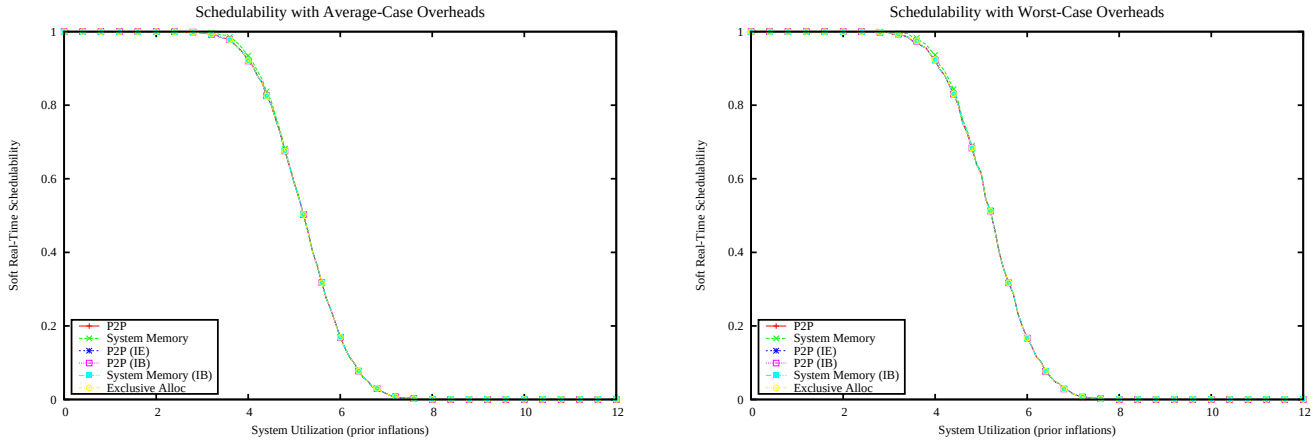

Figure 1791: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

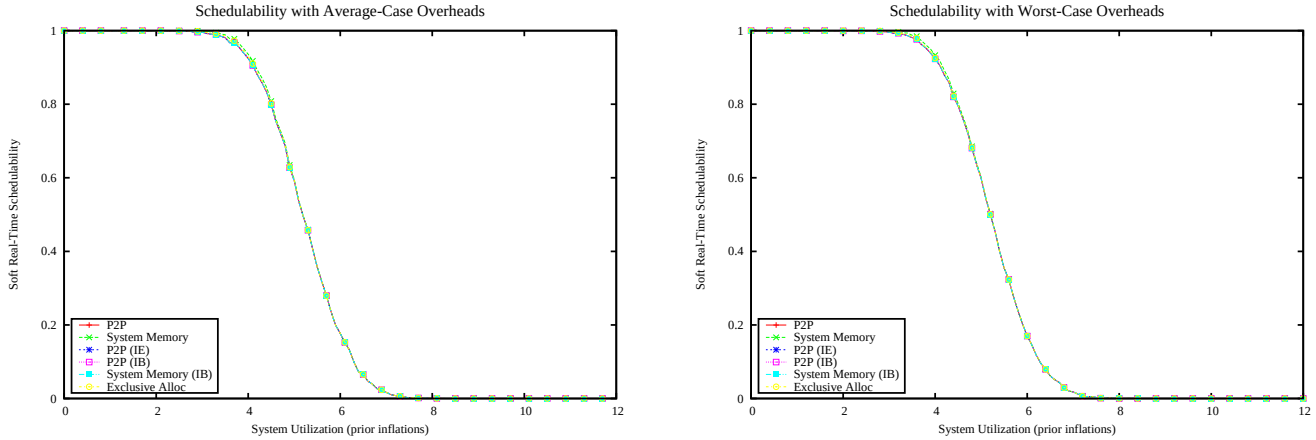

Figure 1792: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

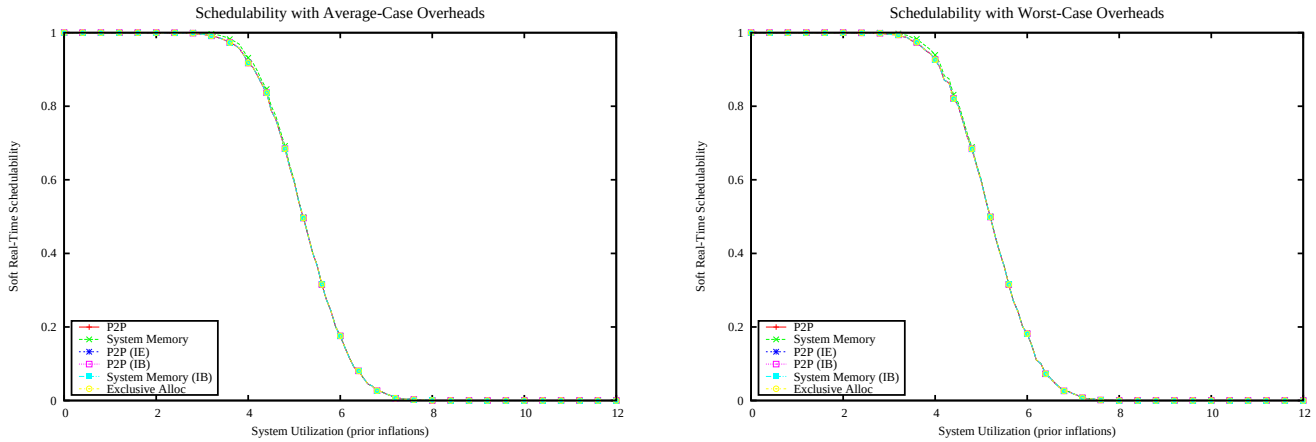

Figure 1793: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

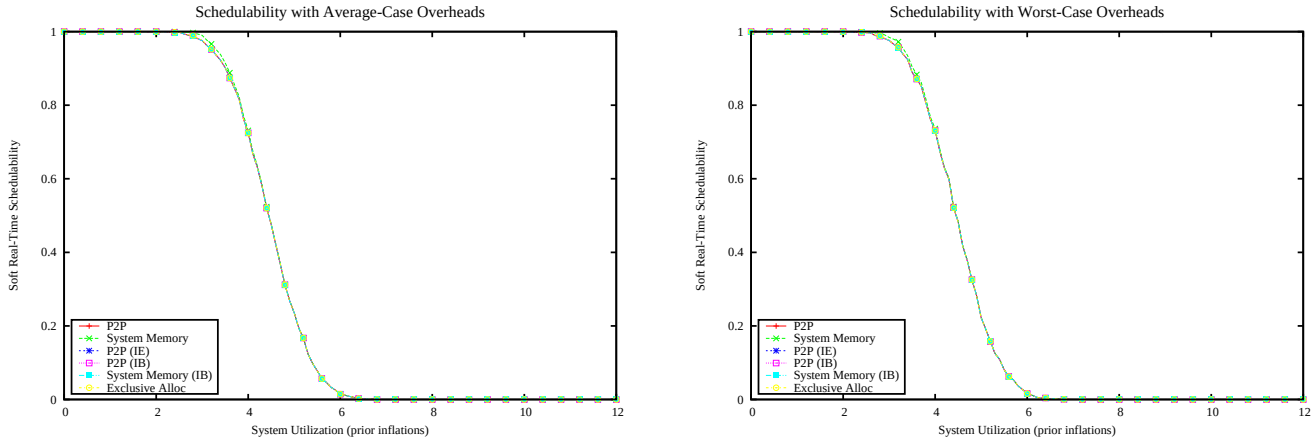

Figure 1794: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

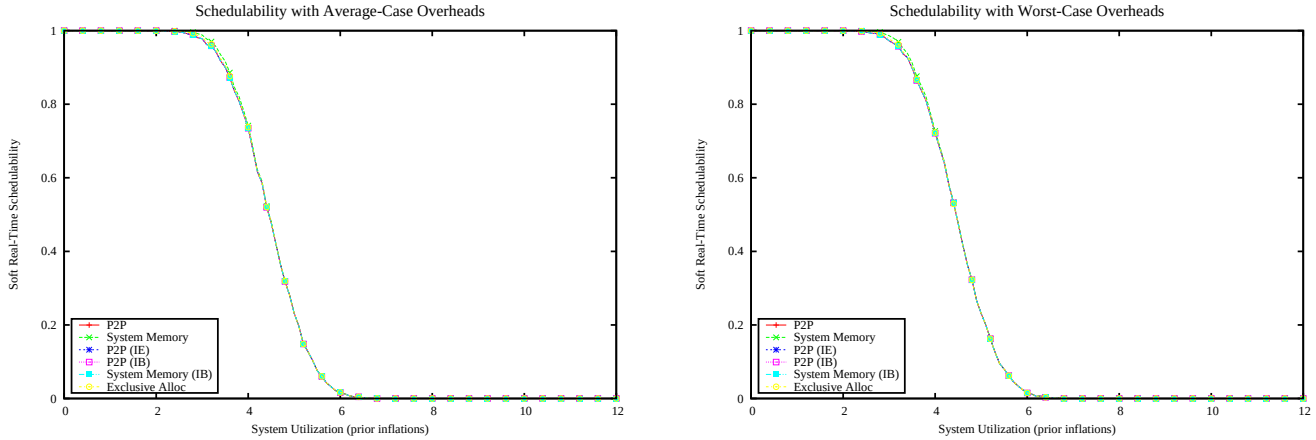

Figure 1795: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

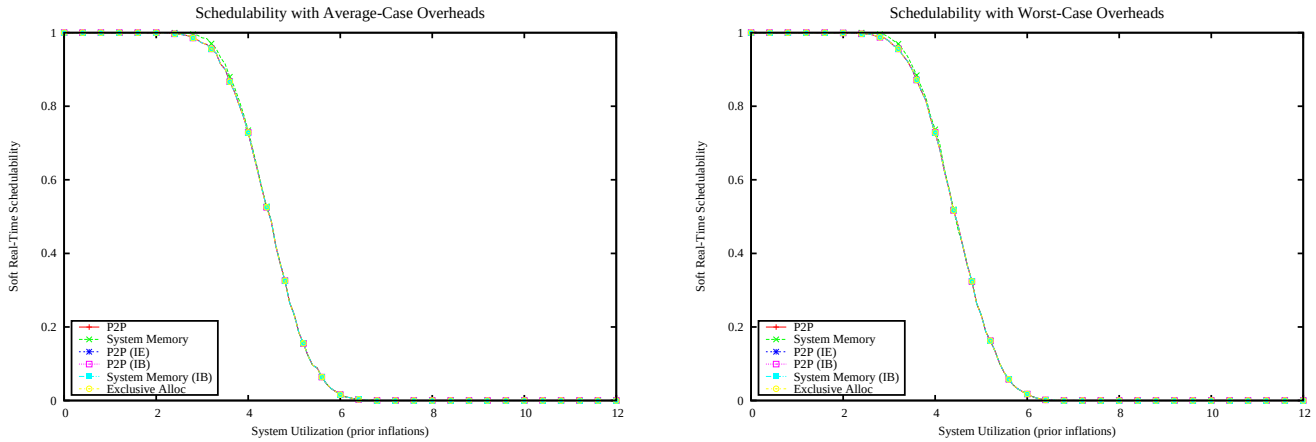

Figure 1796: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

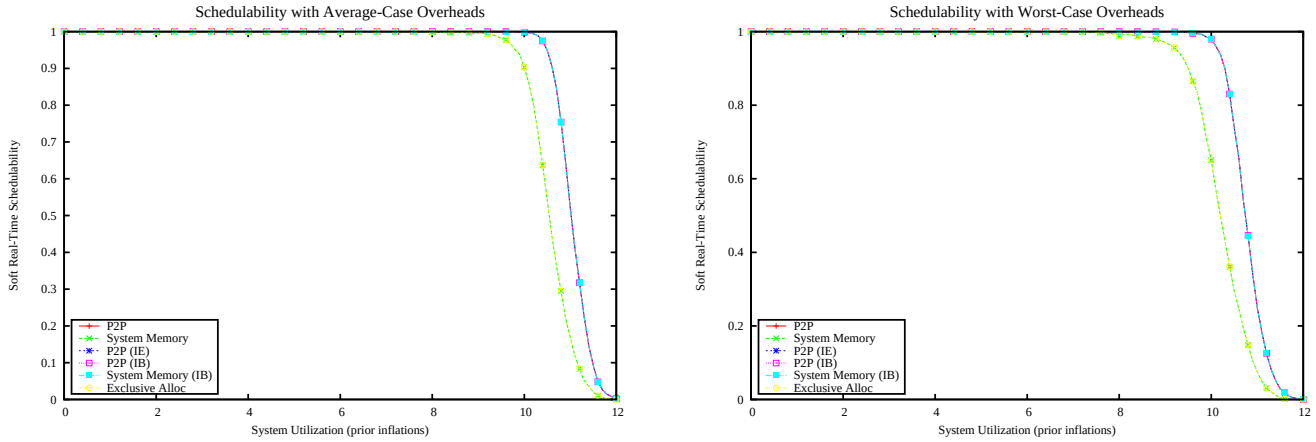

Figure 1797: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

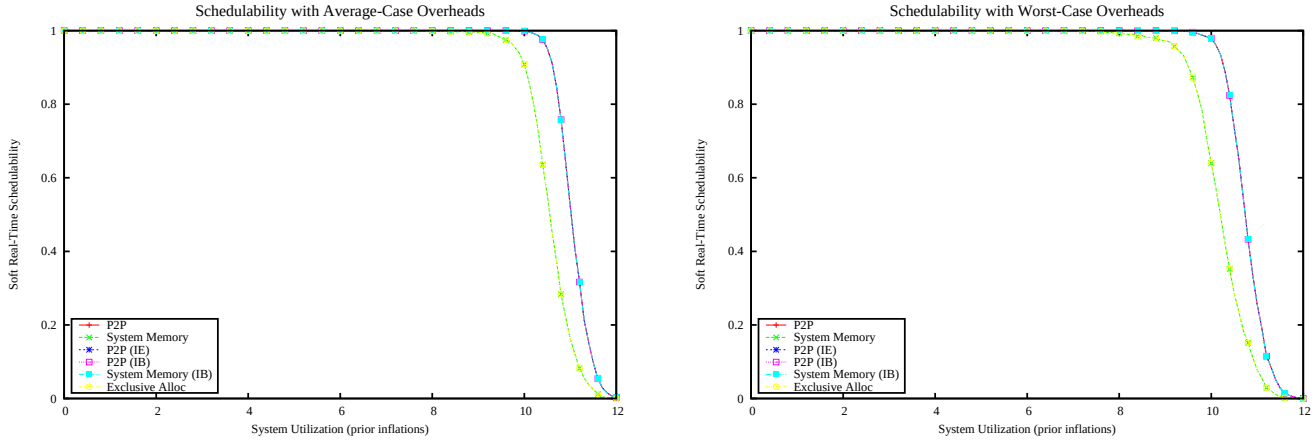

Figure 1798: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

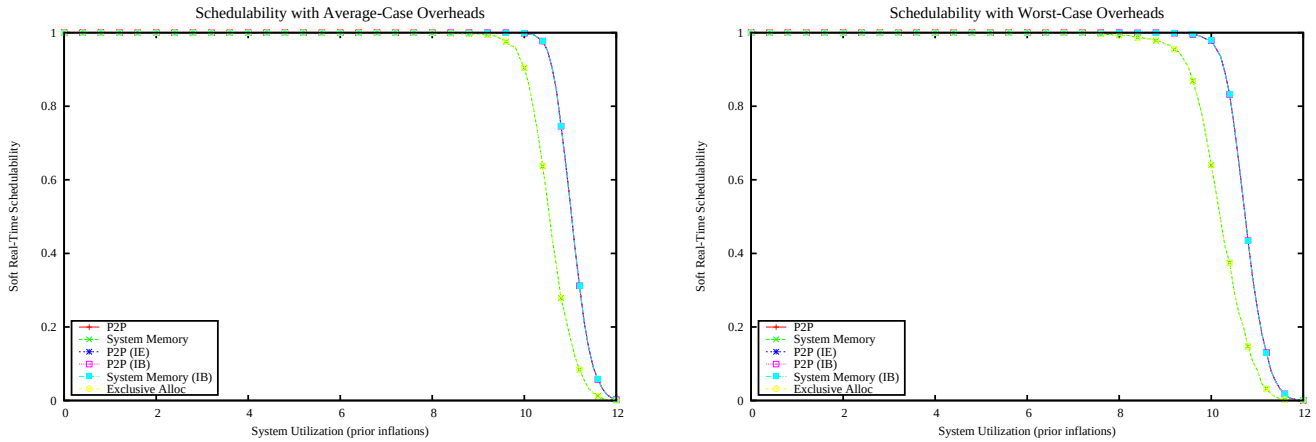

Figure 1799: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

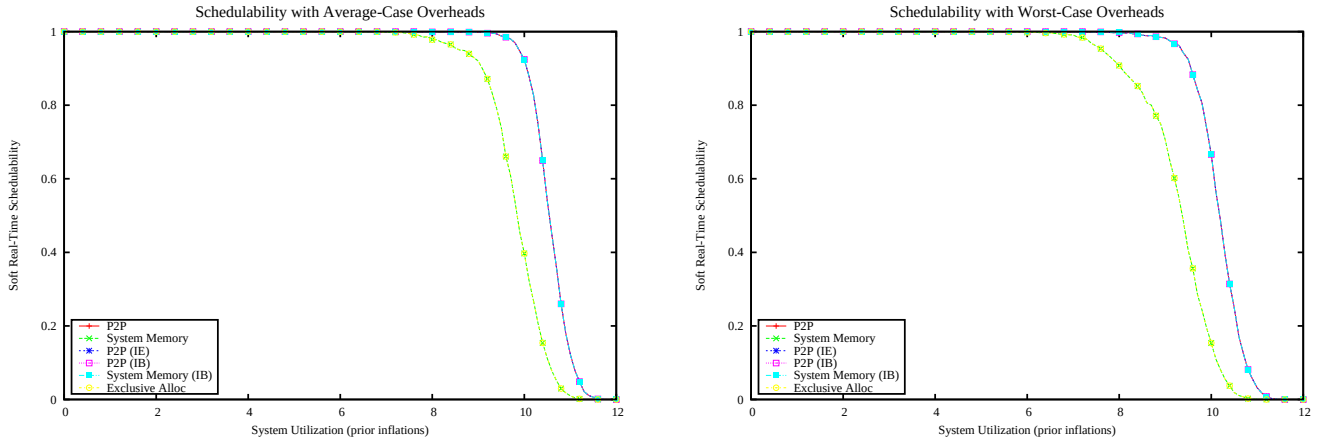

Figure 1800: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

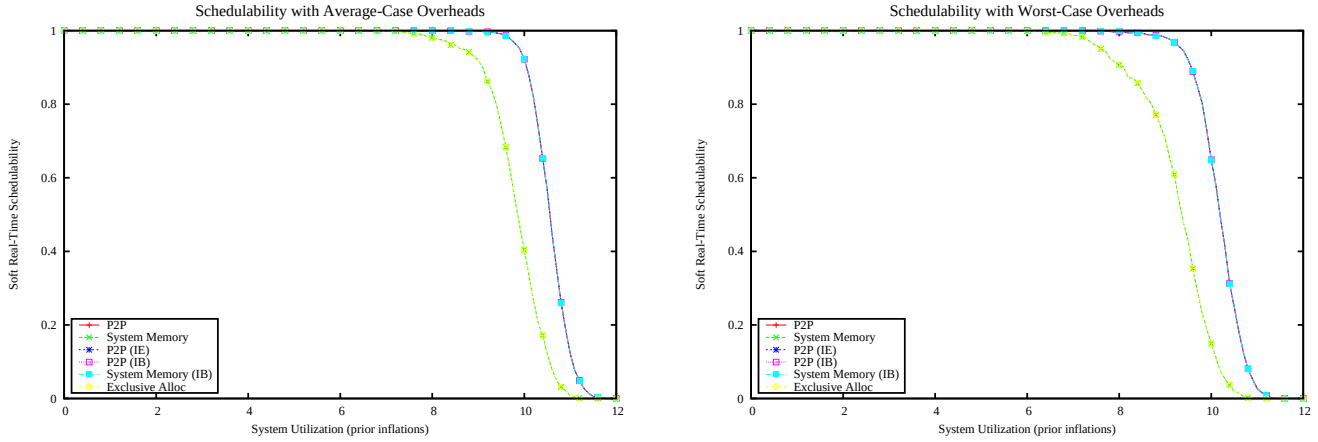

Figure 1801: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

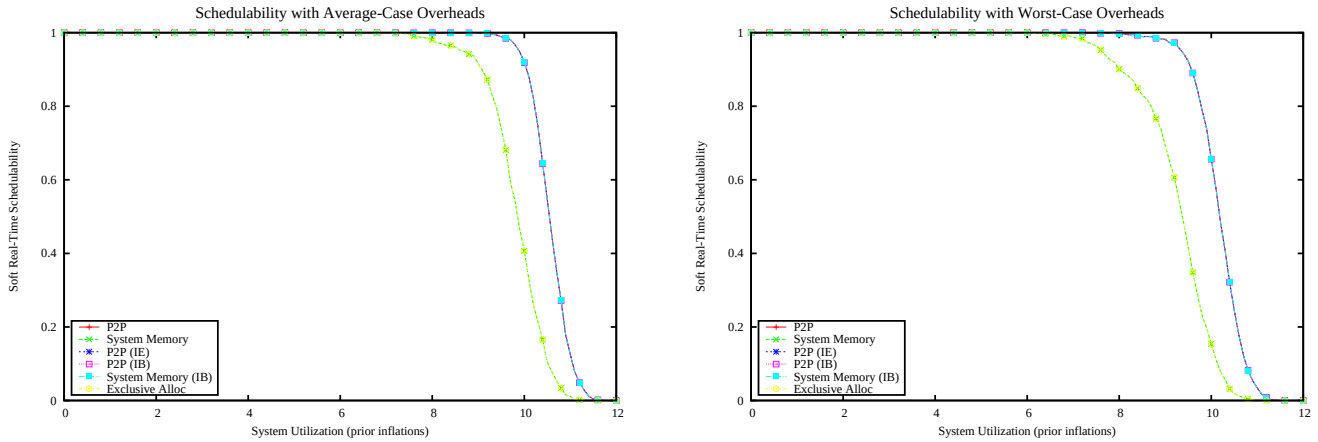

Figure 1802: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

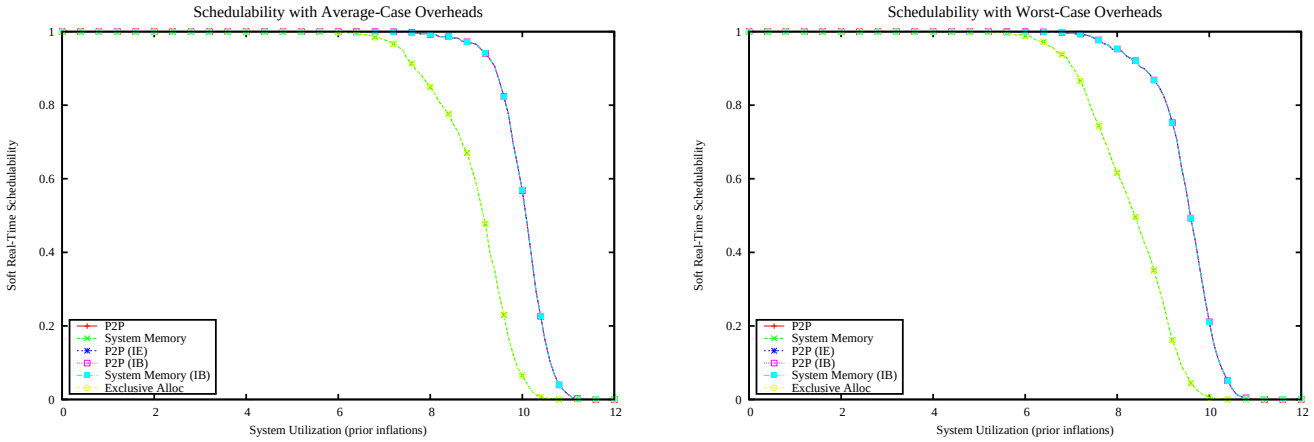

Figure 1803: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

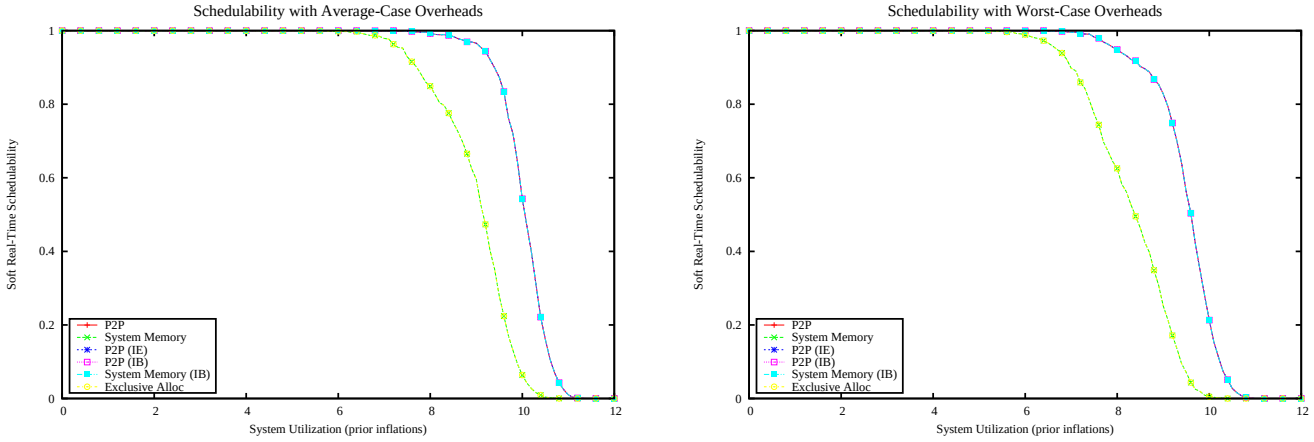

Figure 1804: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

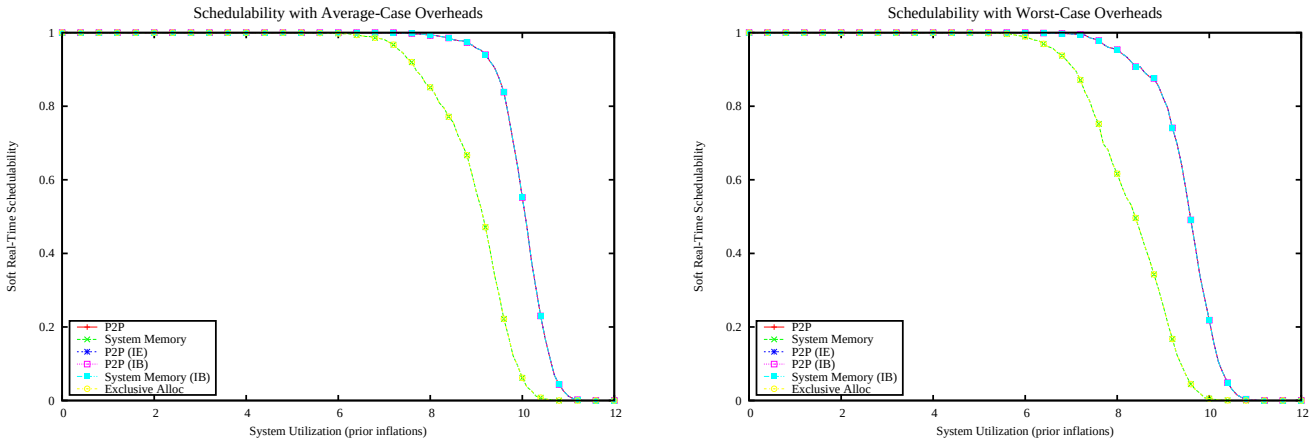

Figure 1805: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

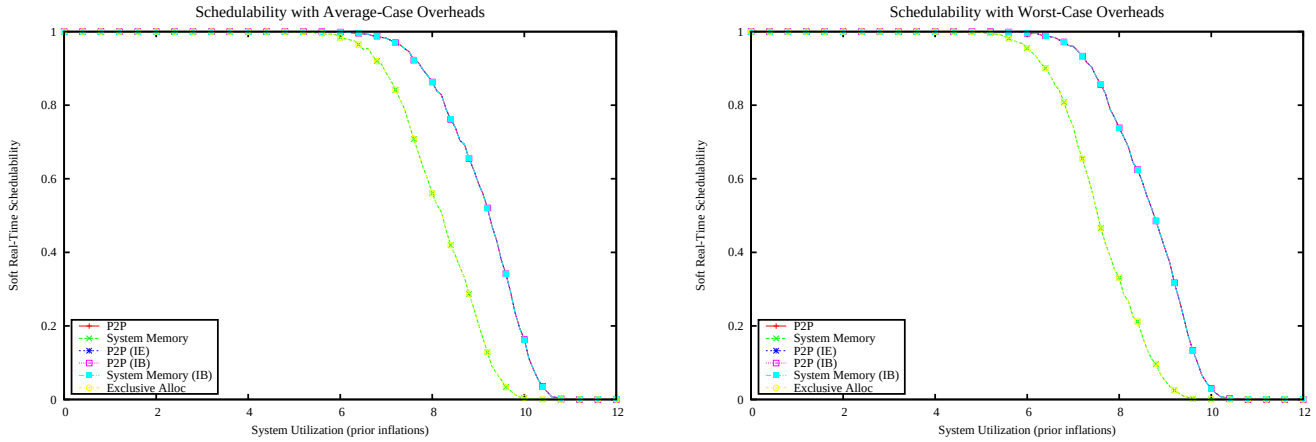

Figure 1806: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

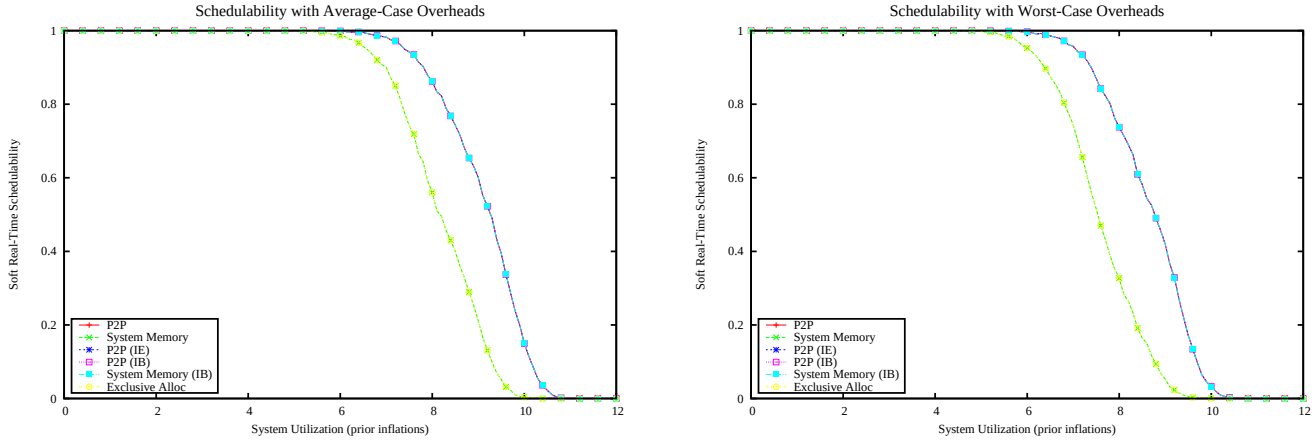

Figure 1807: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

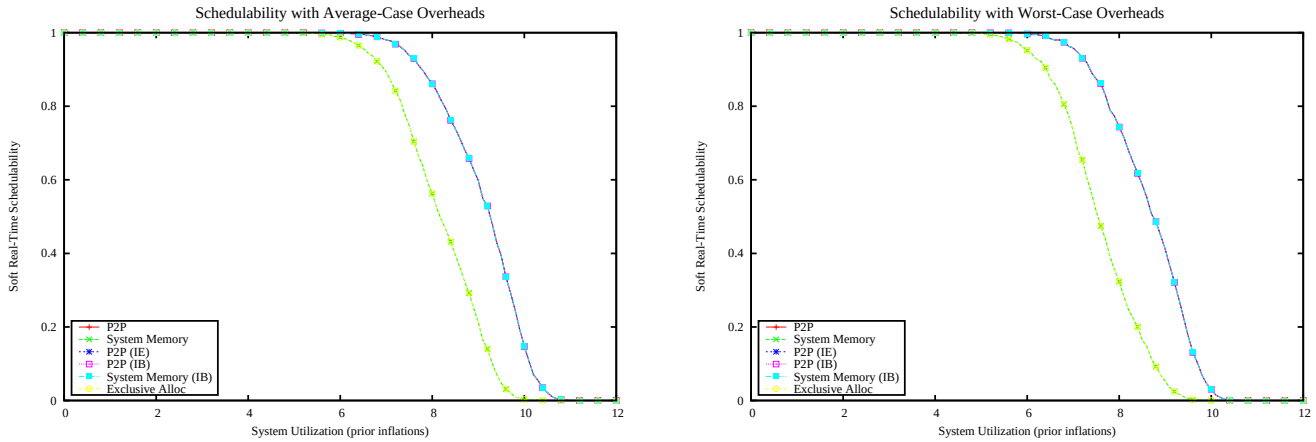

Figure 1808: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

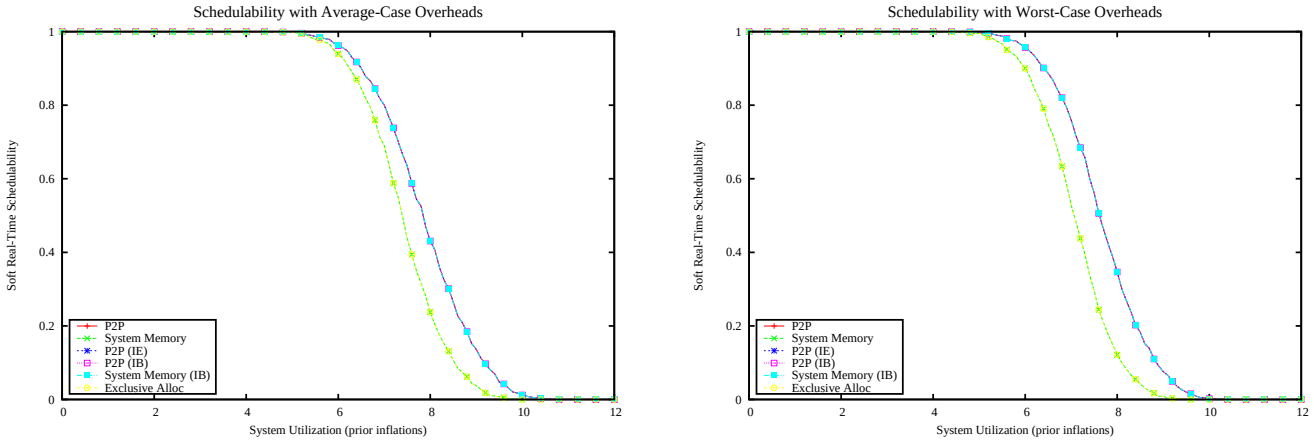

Figure 1809: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

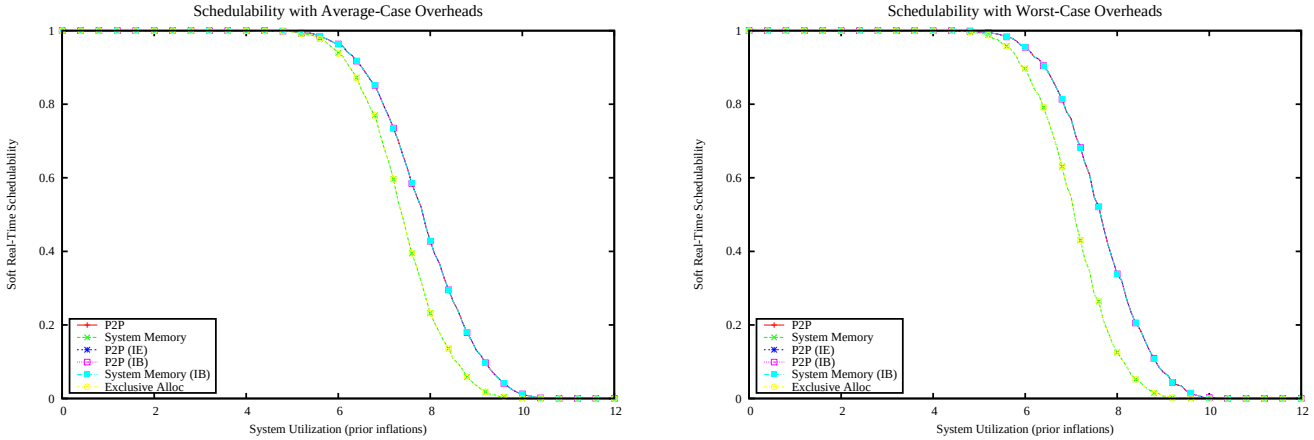

Figure 1810: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

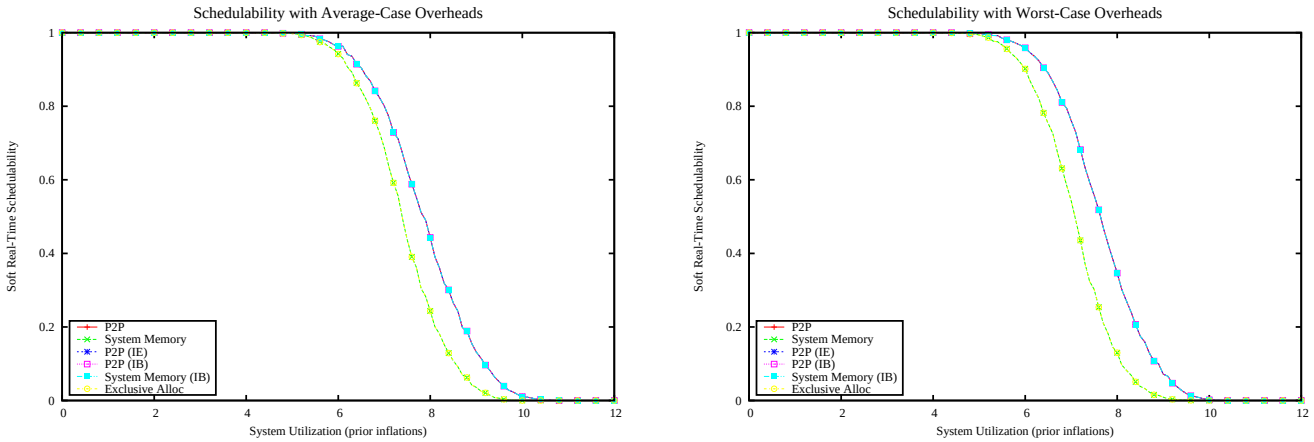

Figure 1811: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

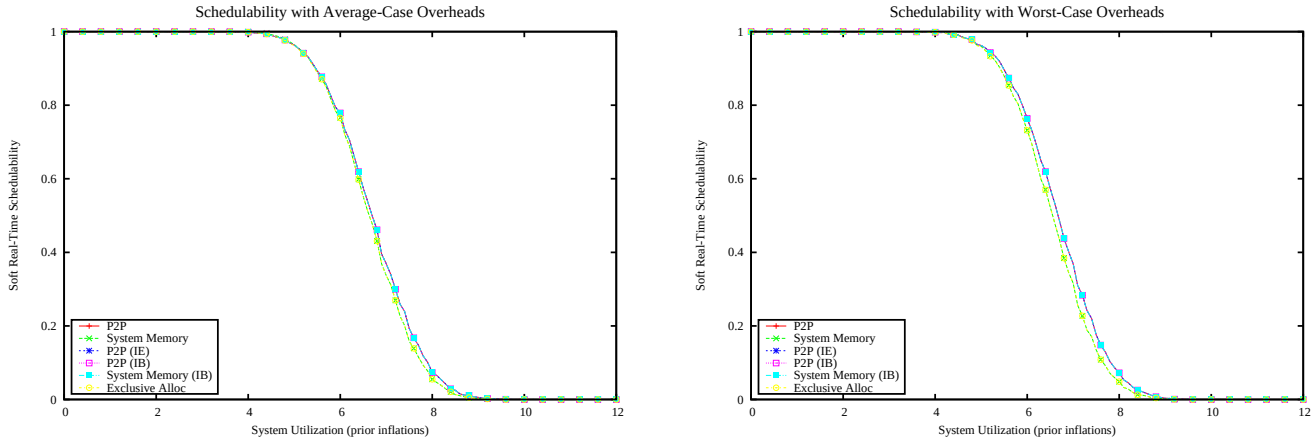

Figure 1812: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

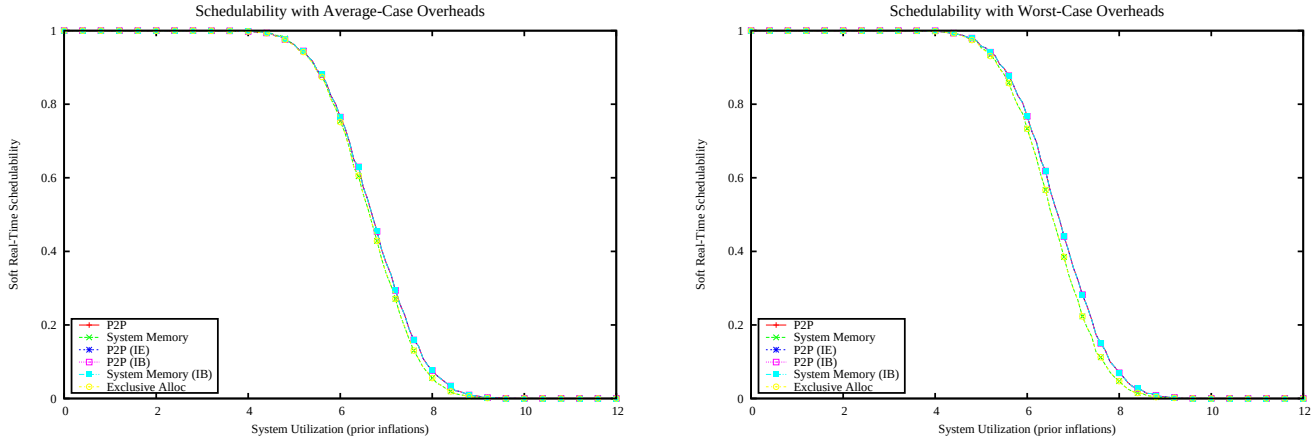

Figure 1813: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

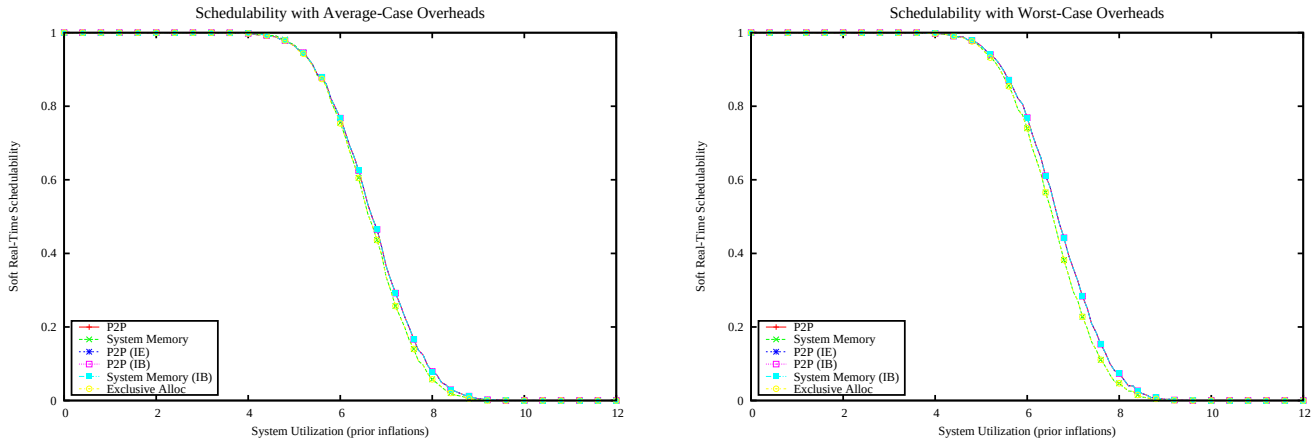

Figure 1814: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

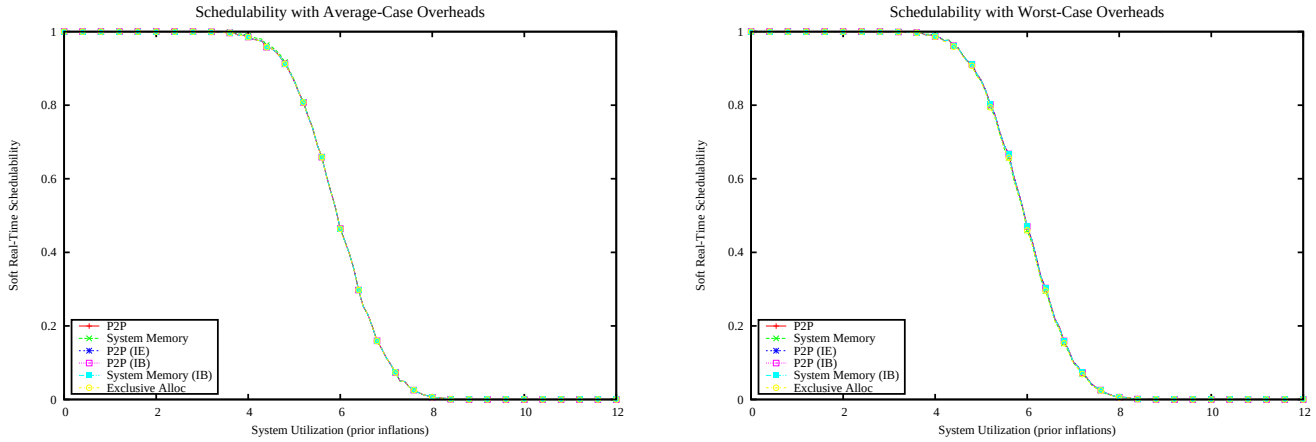

Figure 1815: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

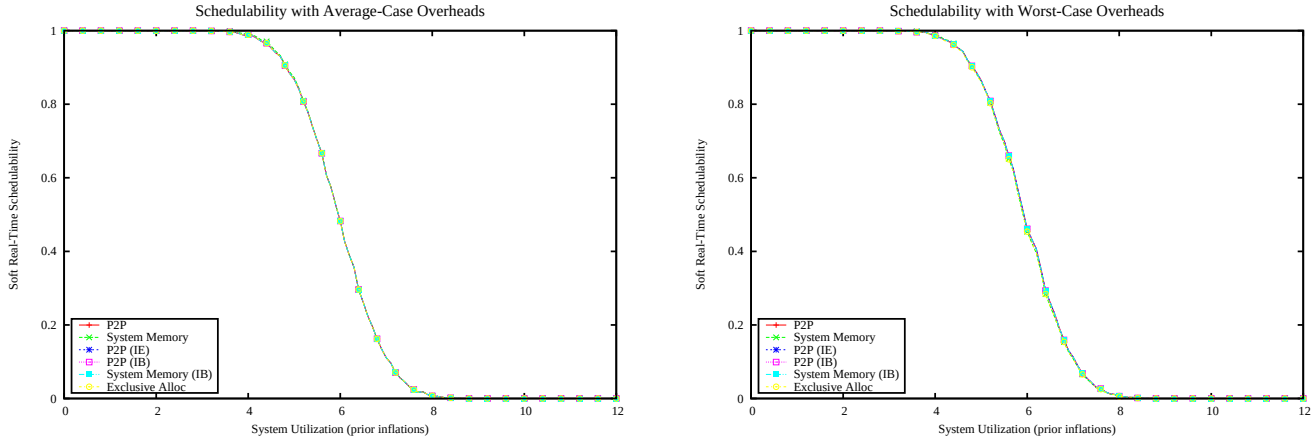

Figure 1816: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

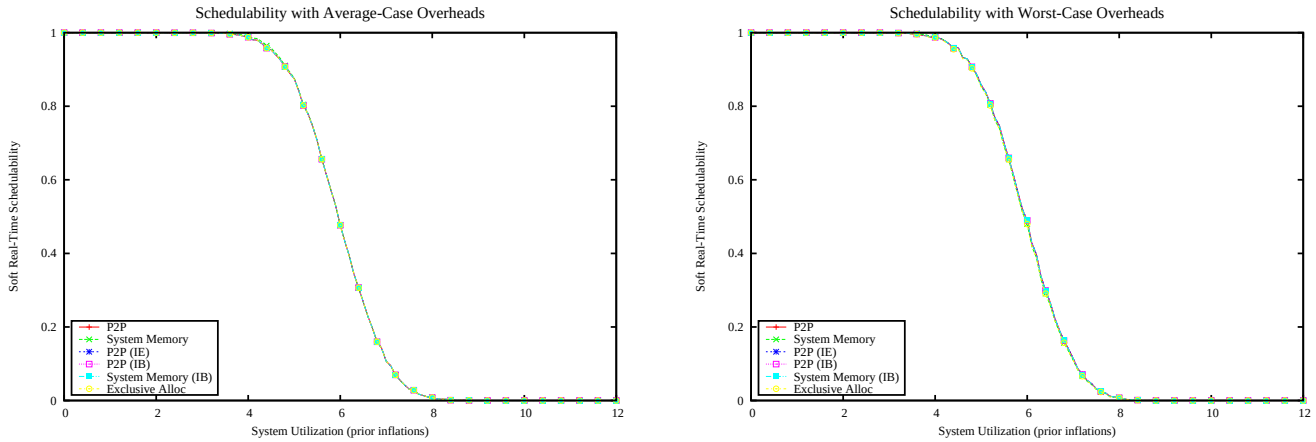

Figure 1817: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

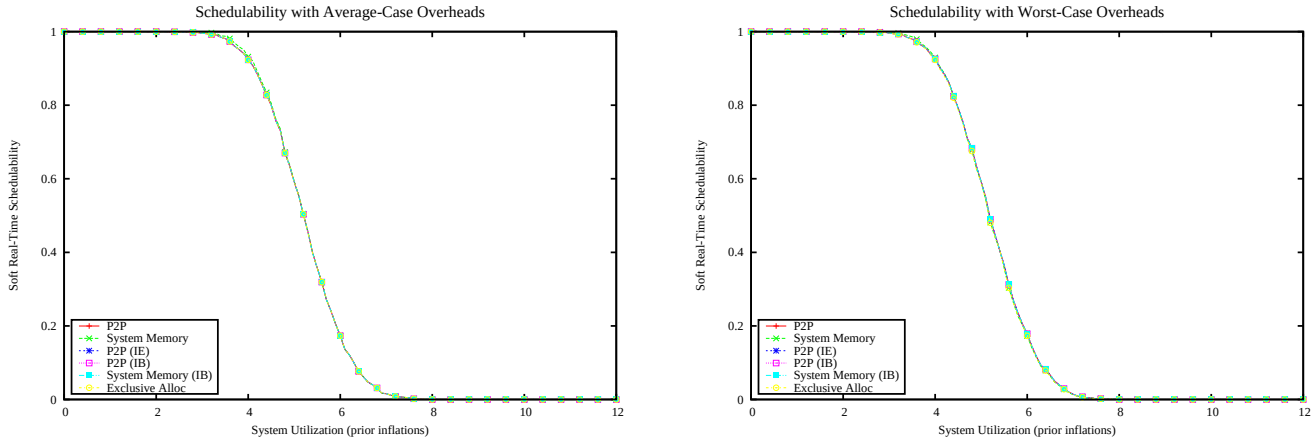

Figure 1818: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

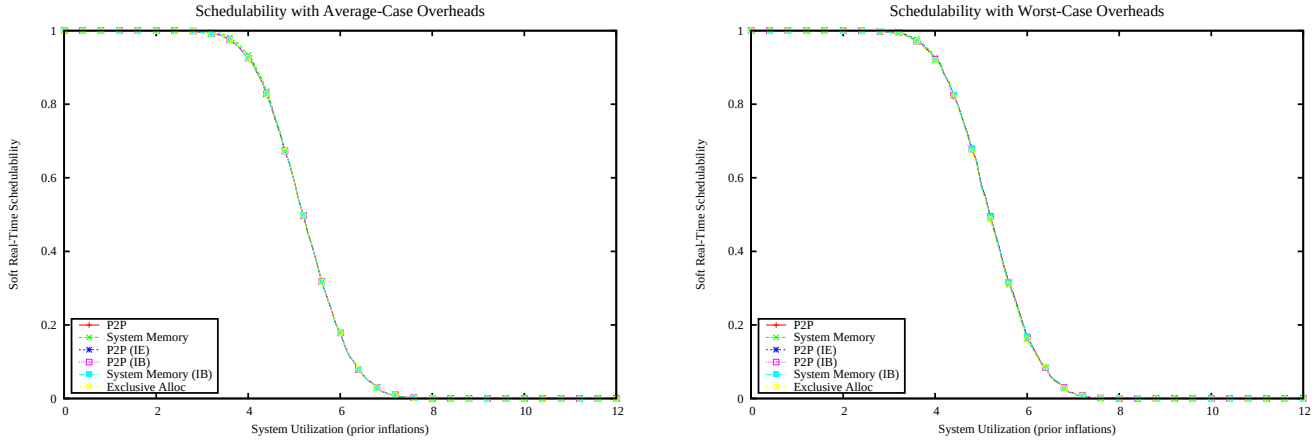

Figure 1819: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

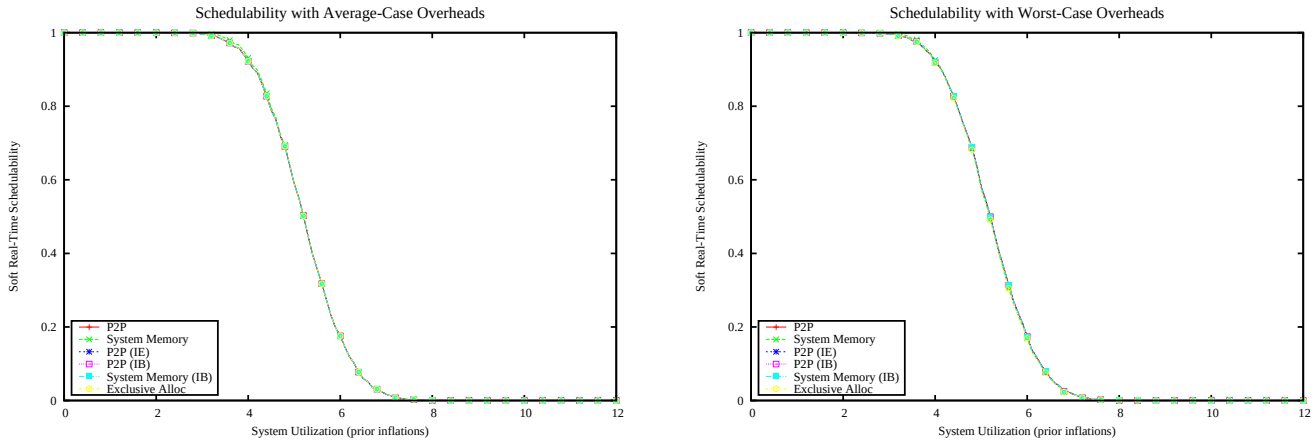

Figure 1820: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

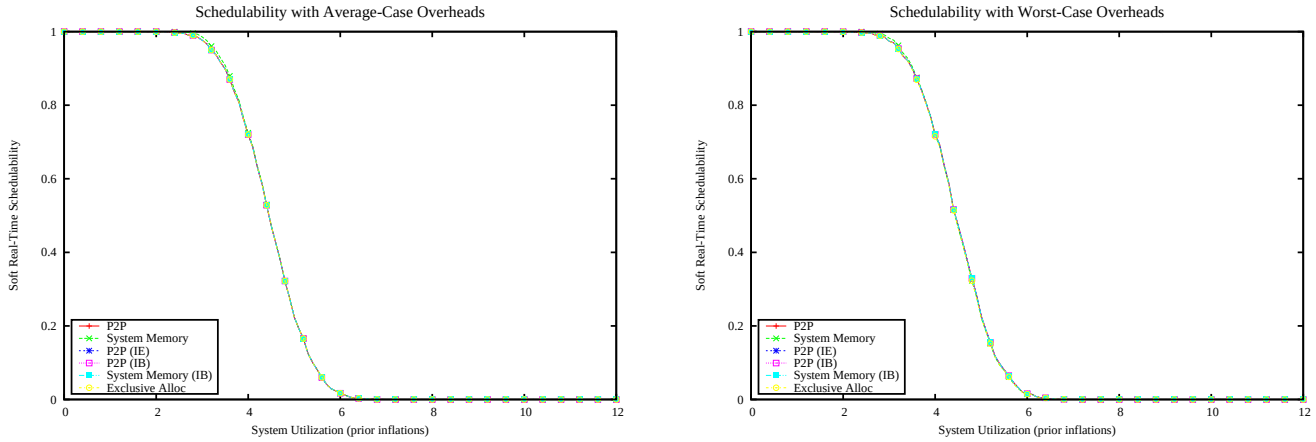

Figure 1821: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

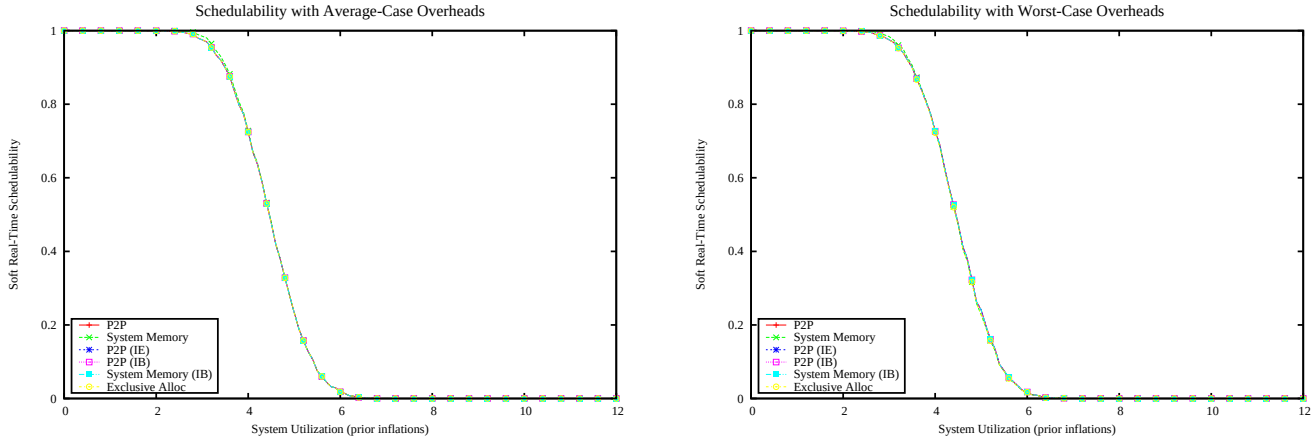

Figure 1822: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

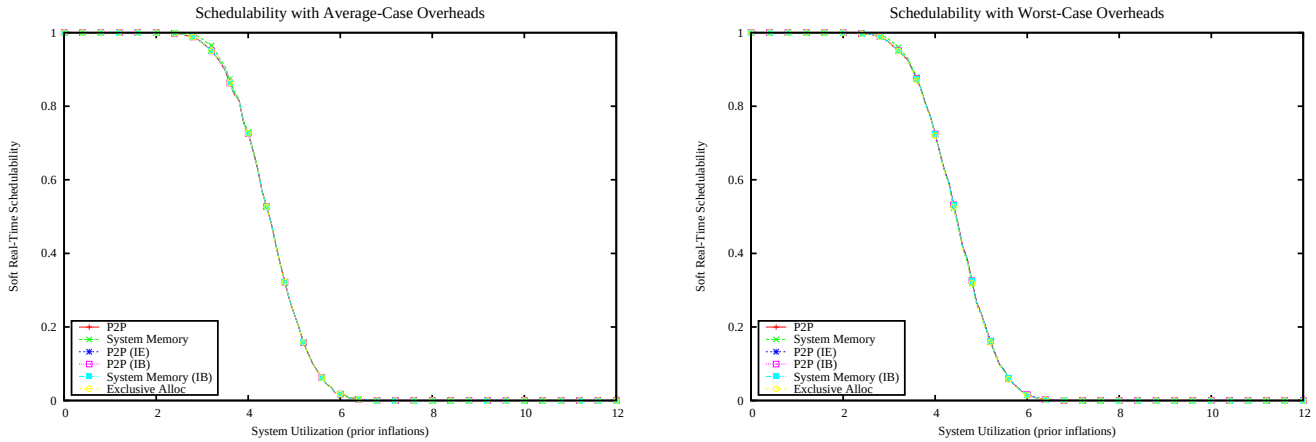

Figure 1823: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

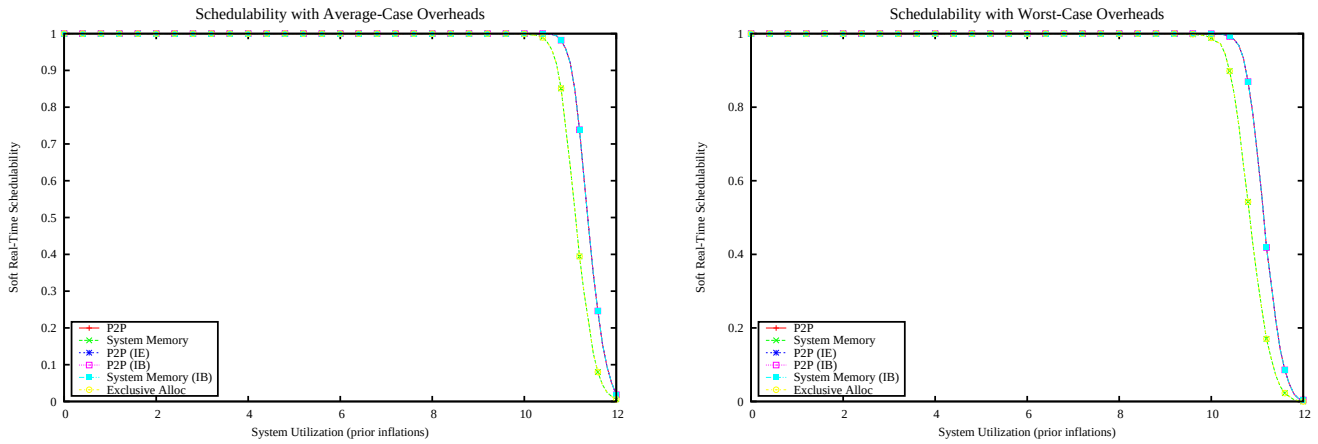

Figure 1824: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

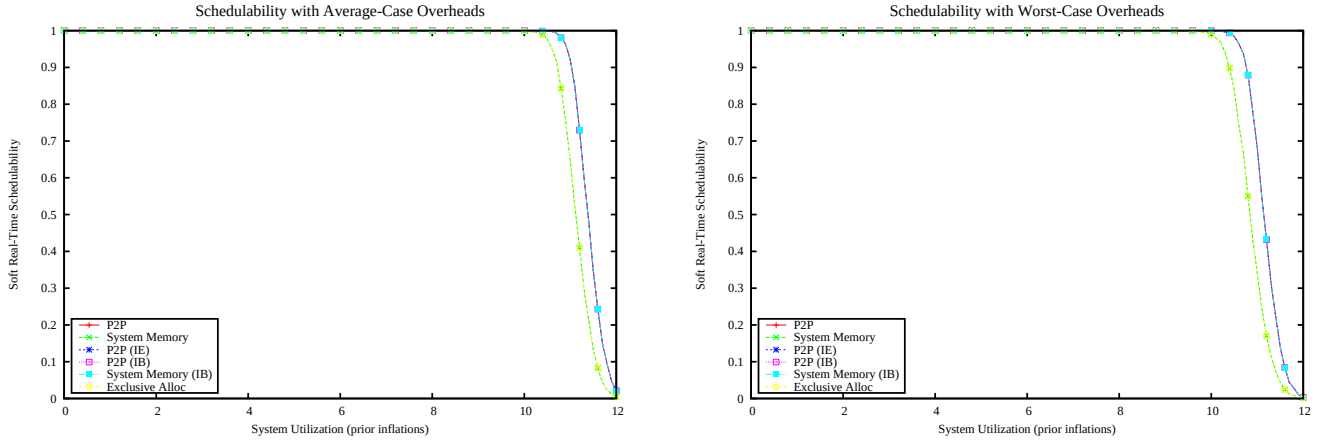

Figure 1825: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

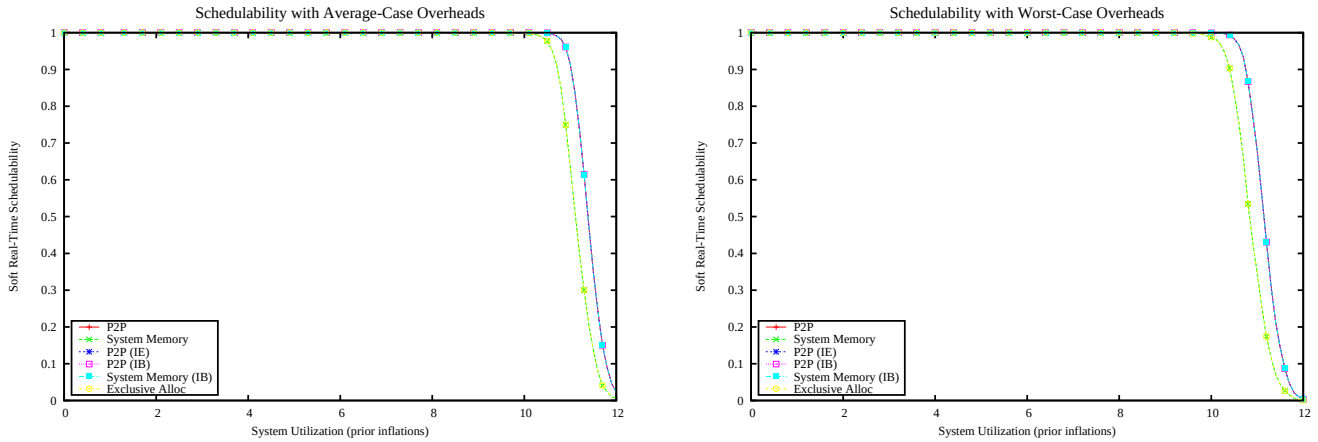

Figure 1826: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

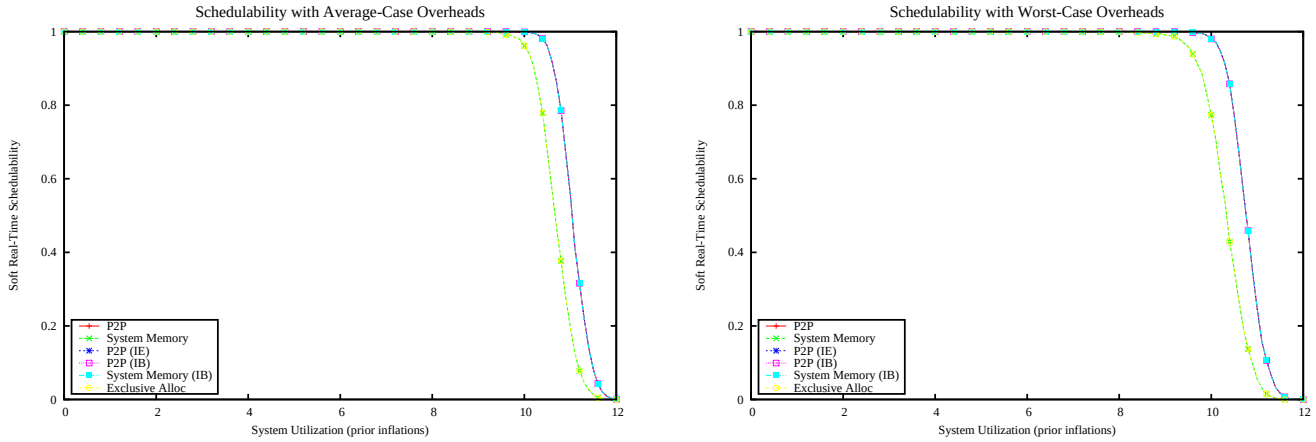

Figure 1827: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

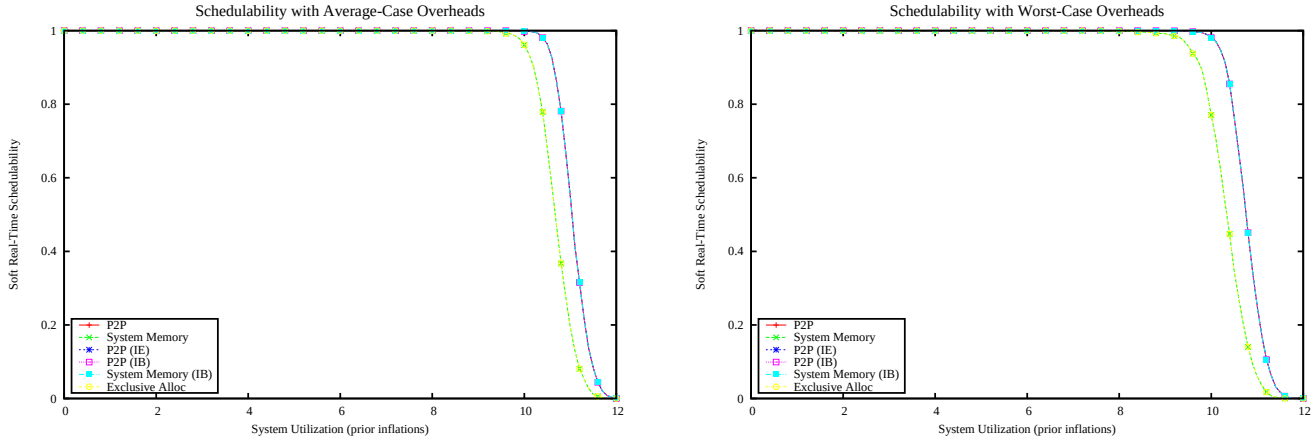

Figure 1828: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

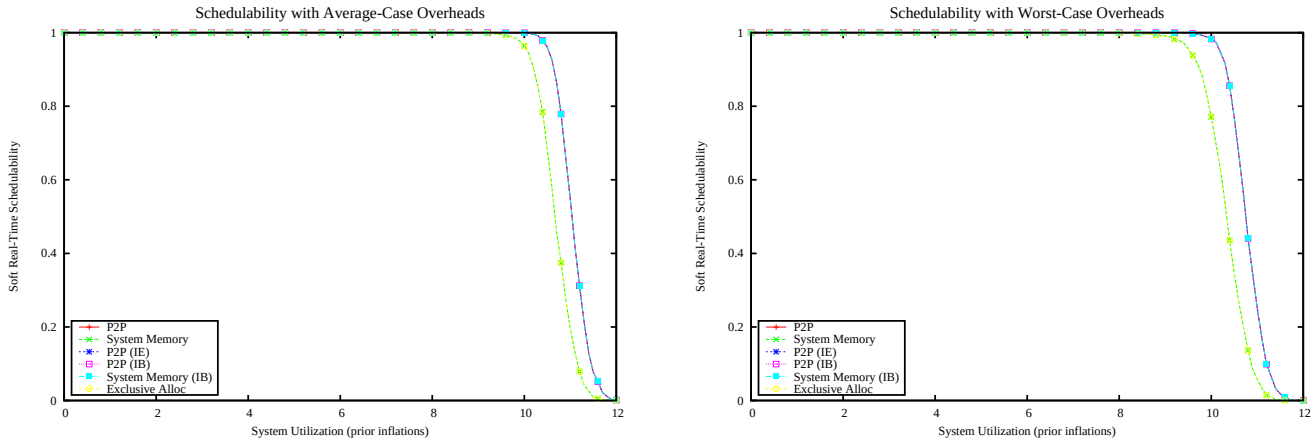

Figure 1829: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

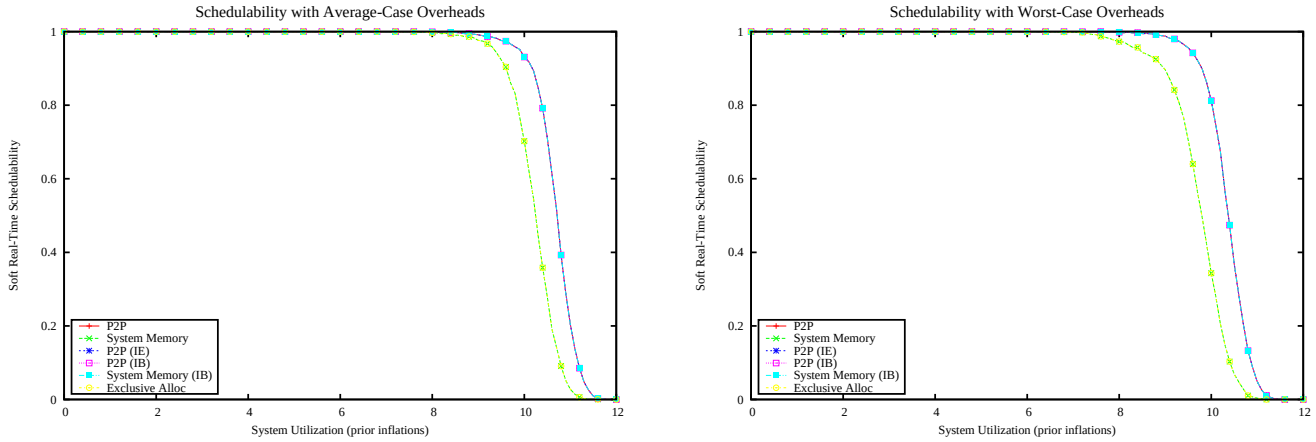

Figure 1830: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

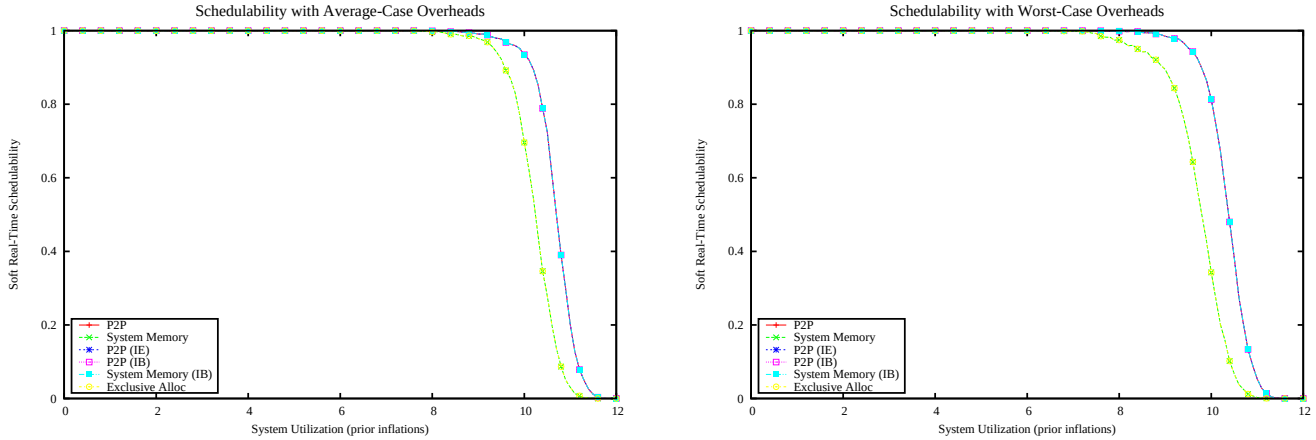

Figure 1831: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

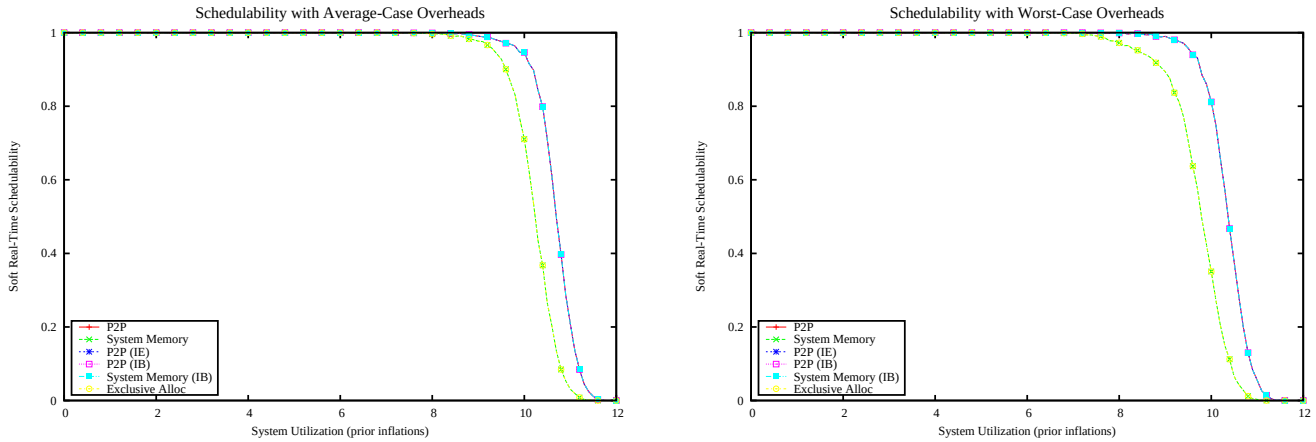

Figure 1832: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

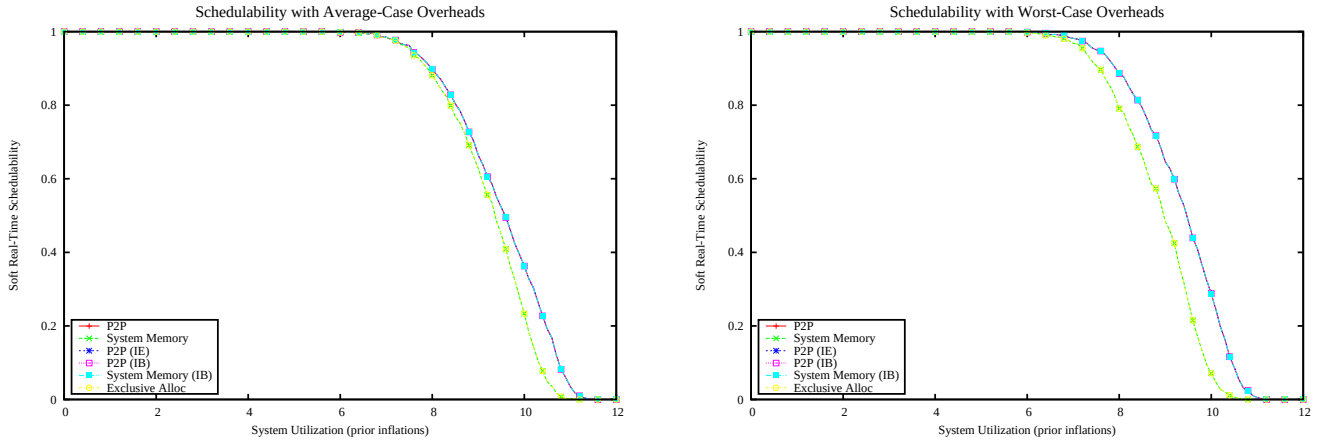

Figure 1833: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

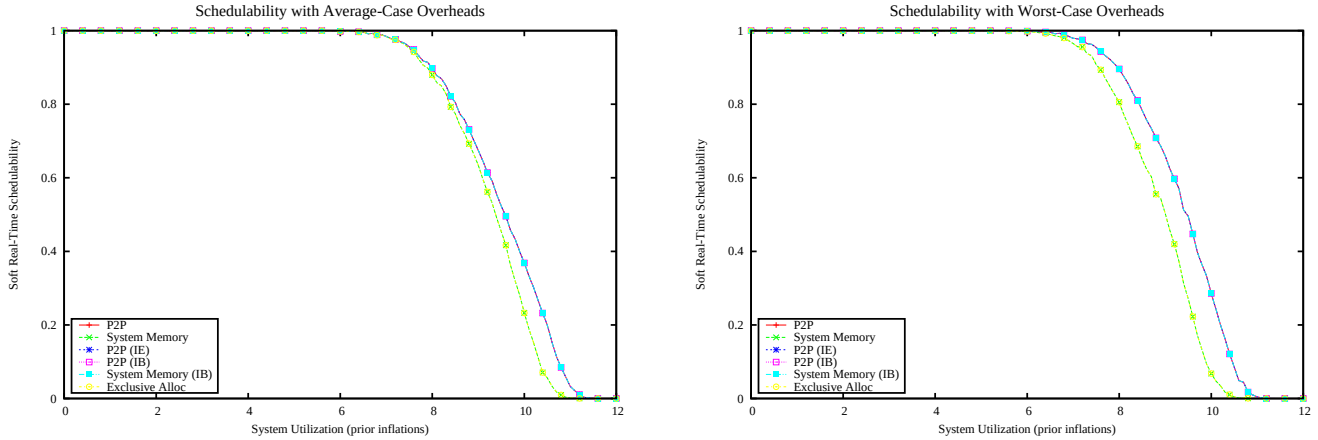

Figure 1834: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

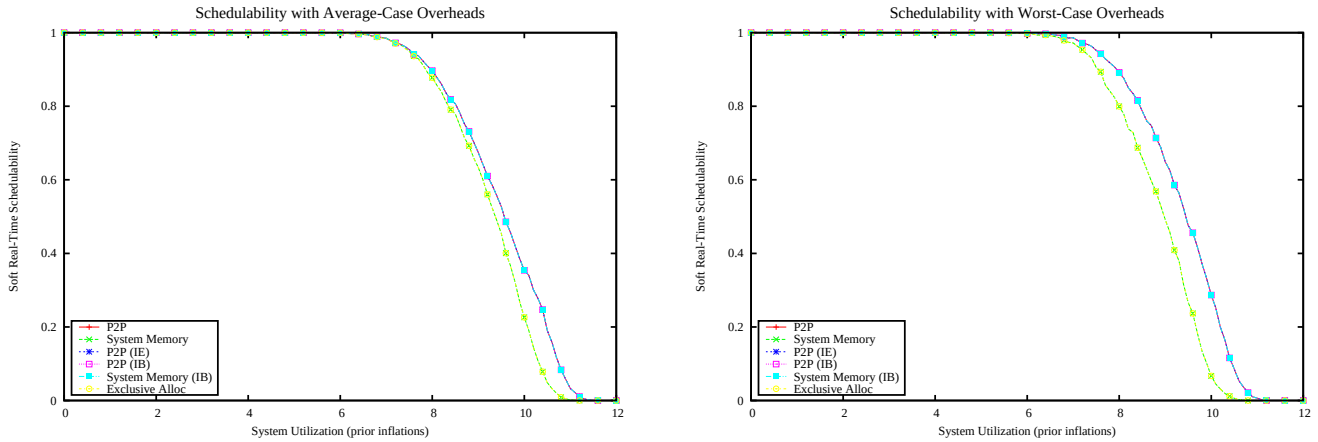

Figure 1835: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

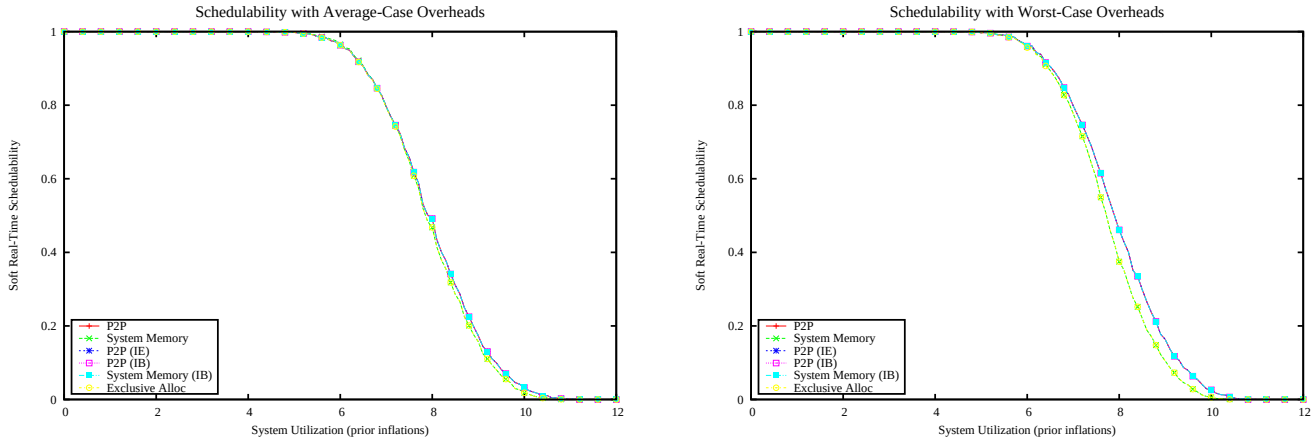

Figure 1836: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

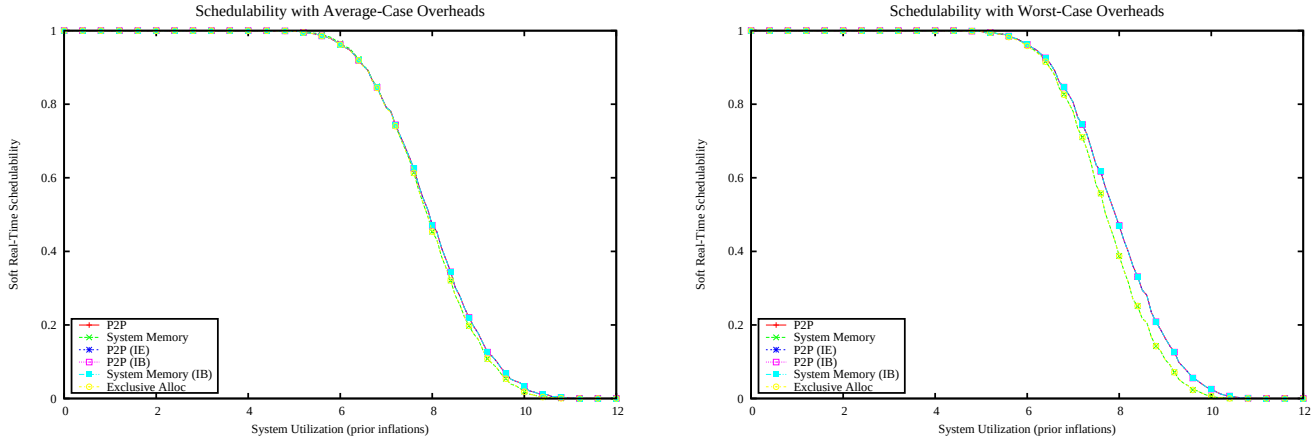

Figure 1837: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

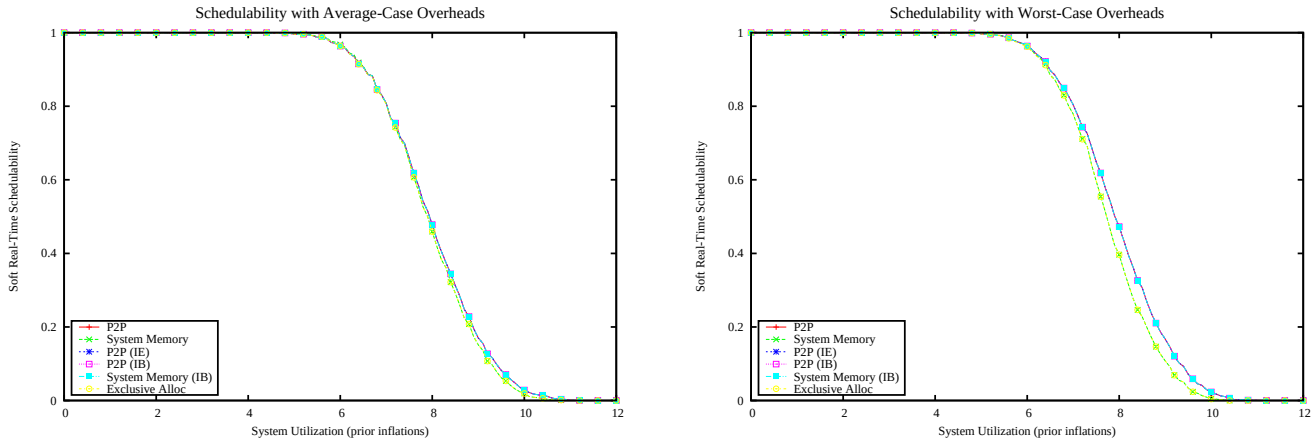

Figure 1838: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

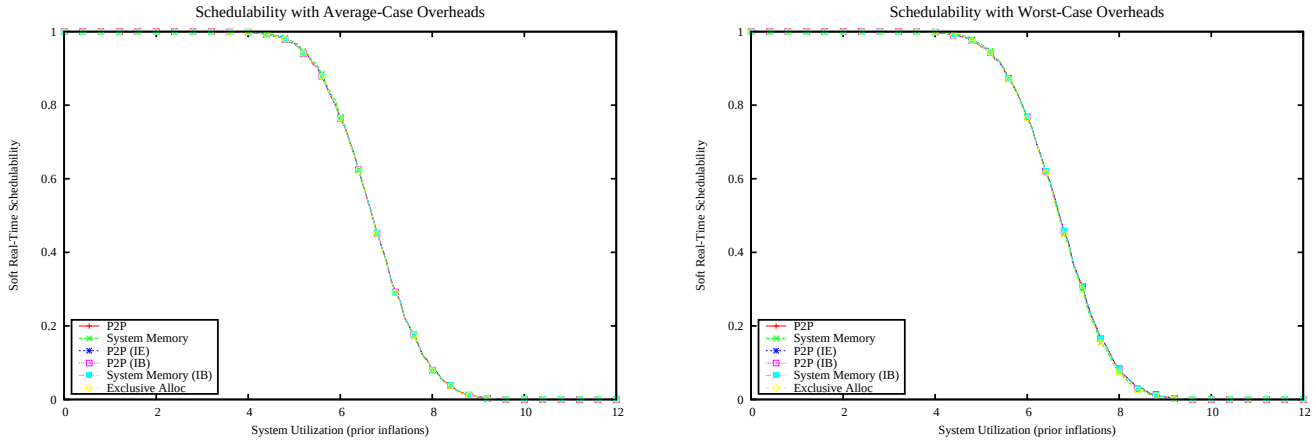

Figure 1839: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

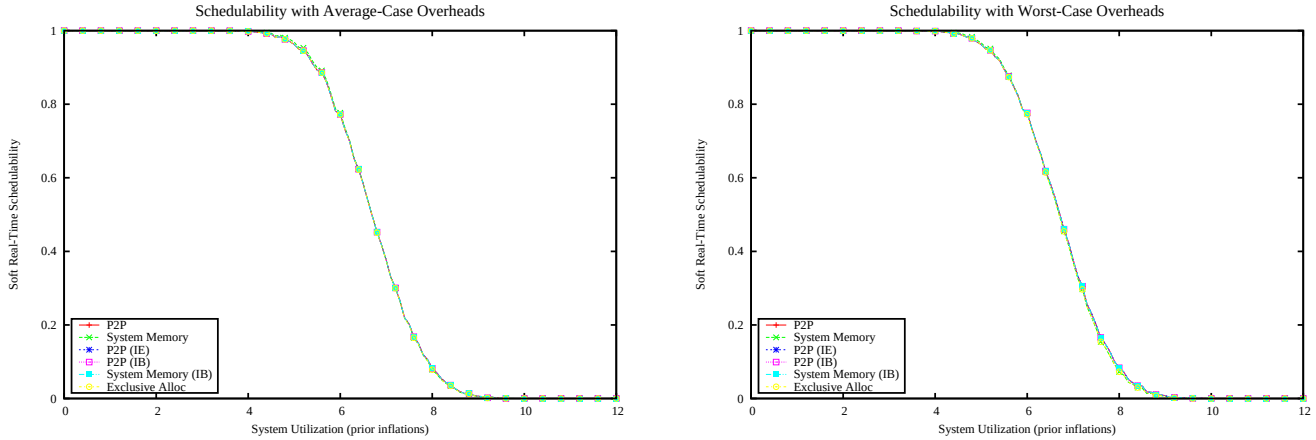

Figure 1840: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

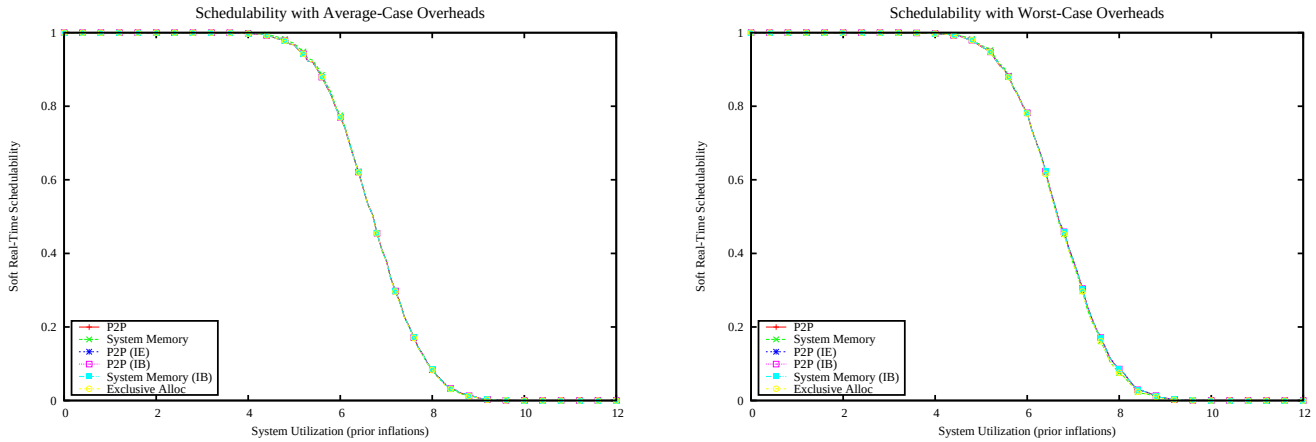

Figure 1841: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

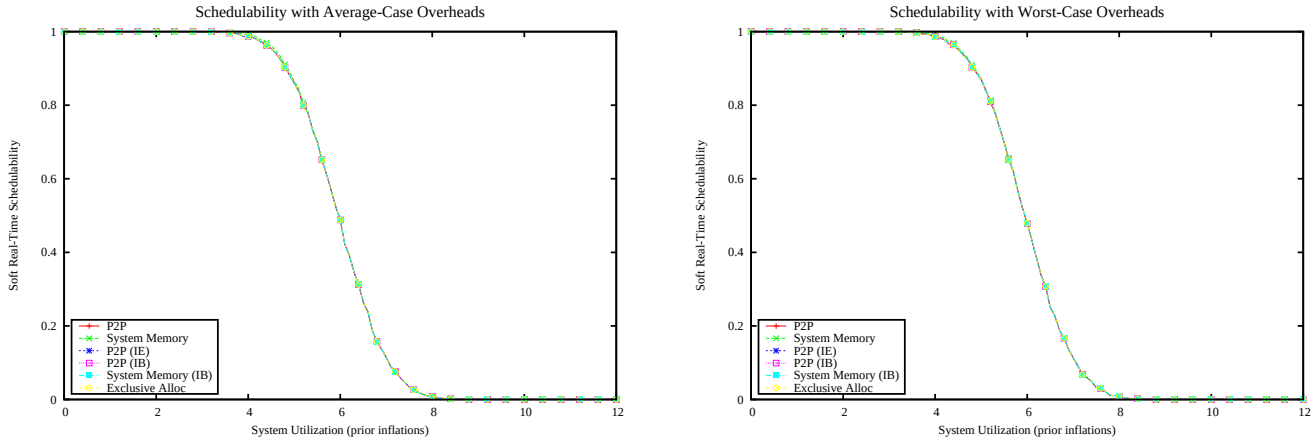

Figure 1842: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

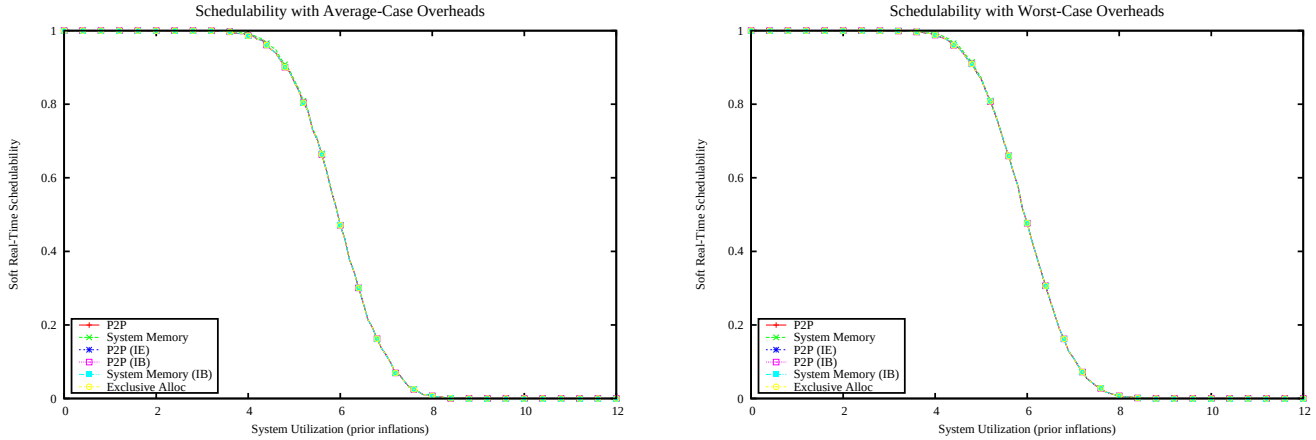

Figure 1843: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

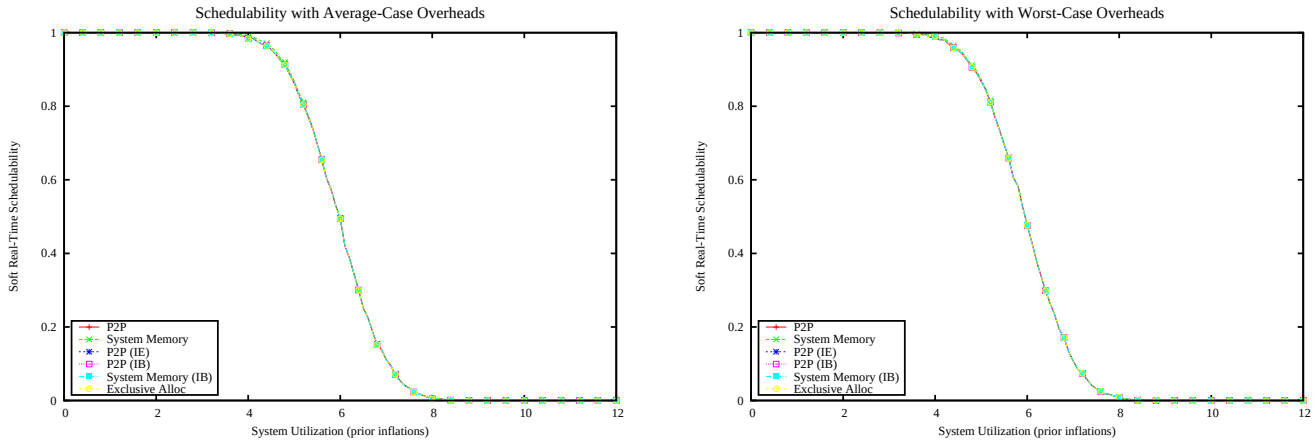

Figure 1844: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

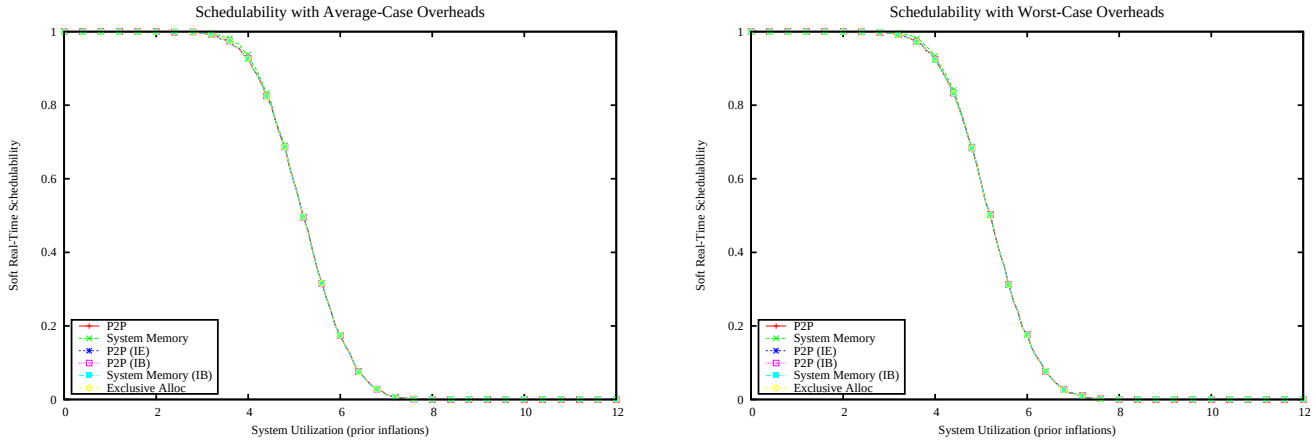

Figure 1845: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

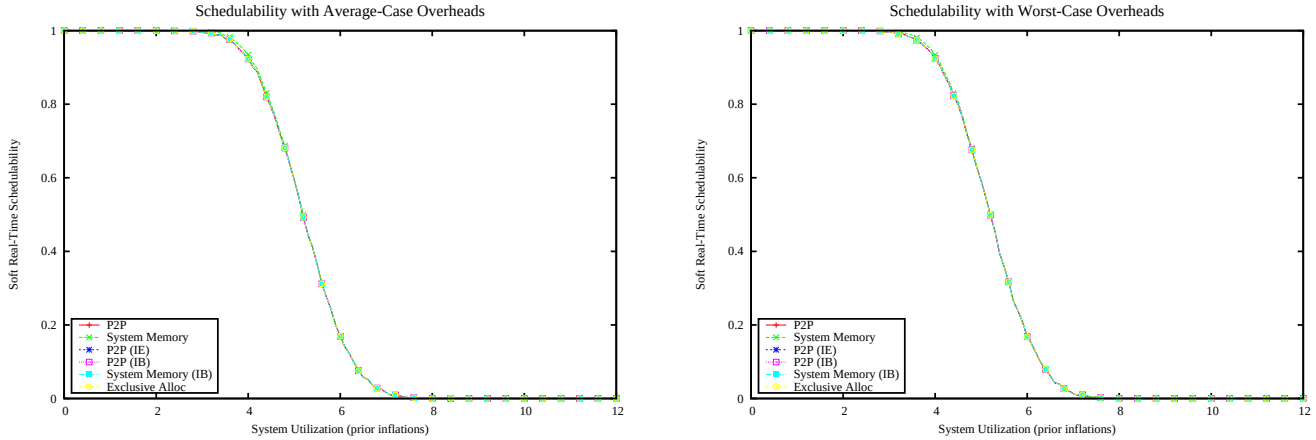

Figure 1846: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

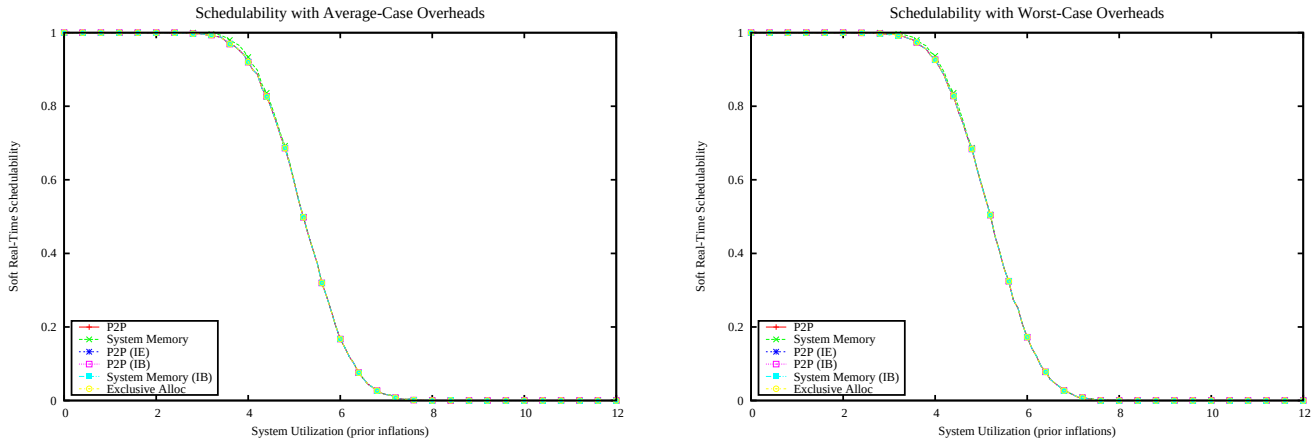

Figure 1847: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

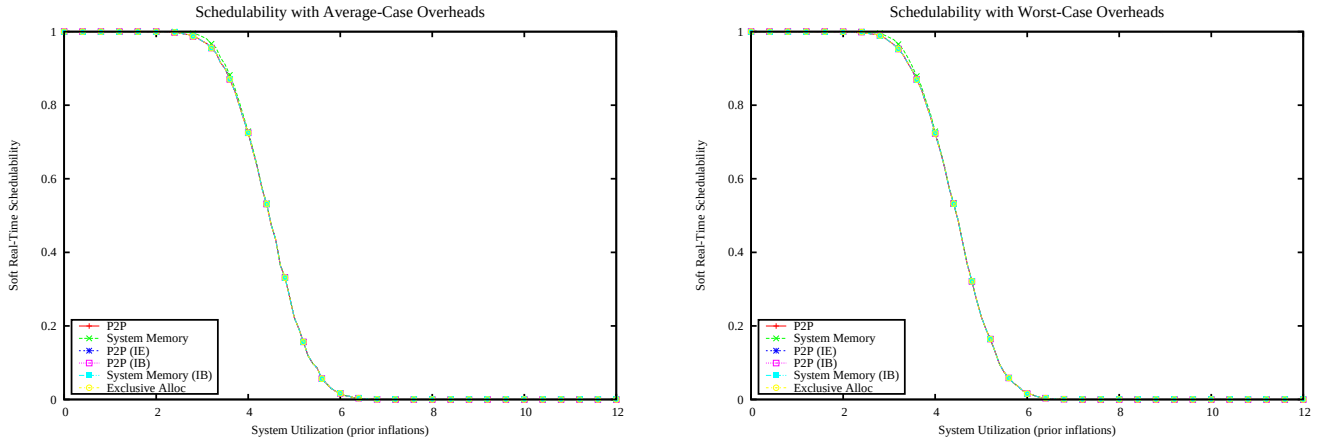

Figure 1848: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

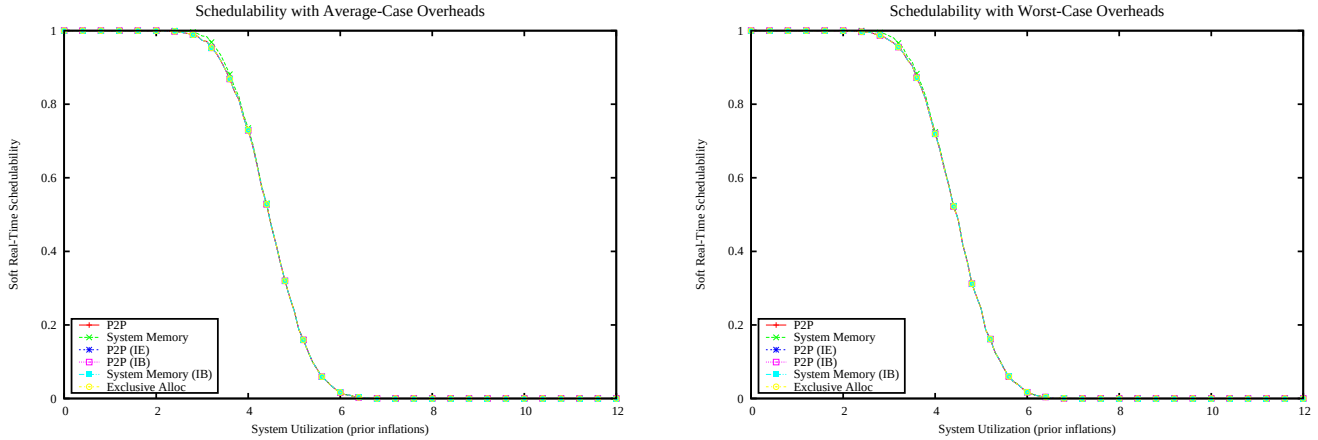

Figure 1849: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

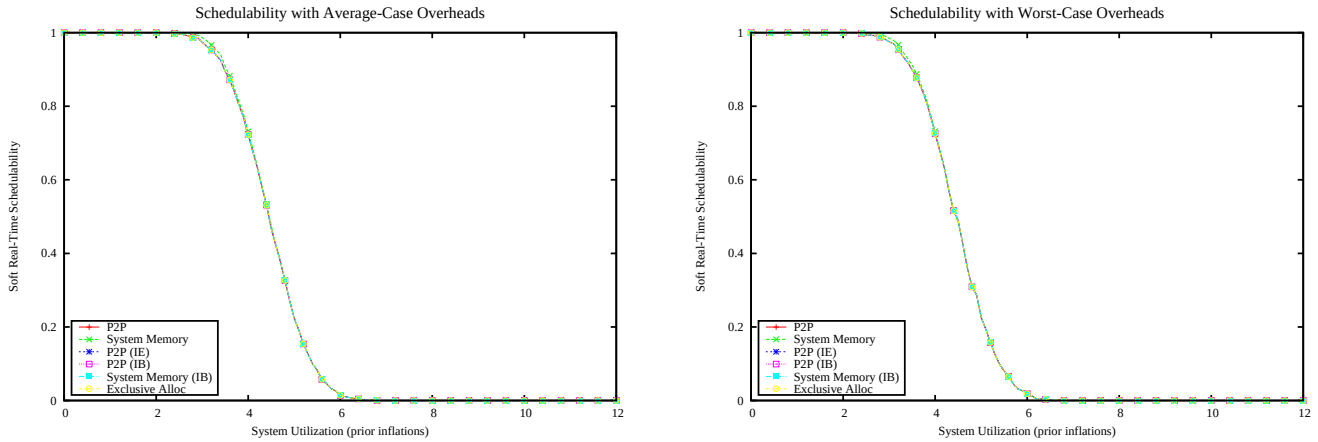

Figure 1850: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

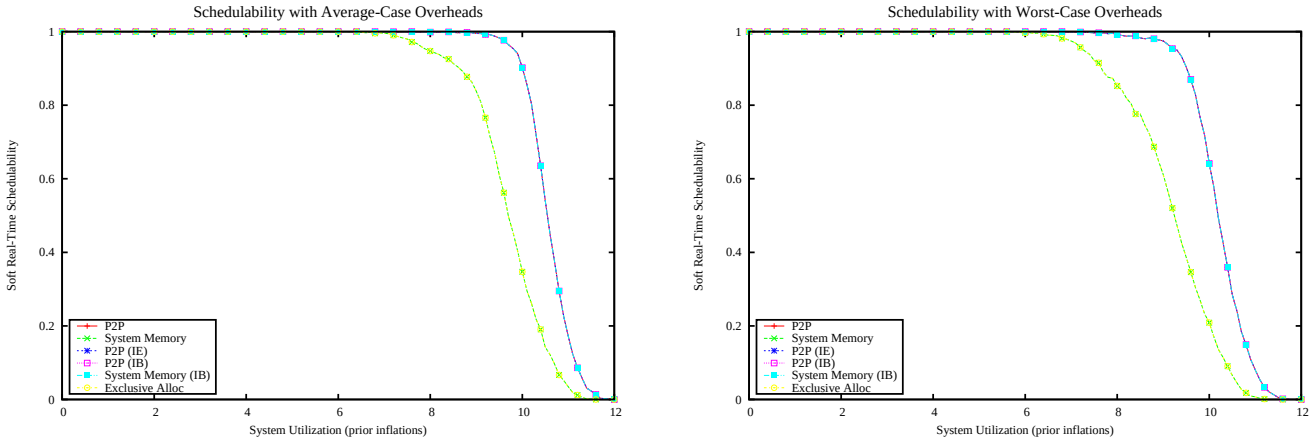

Figure 1851: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

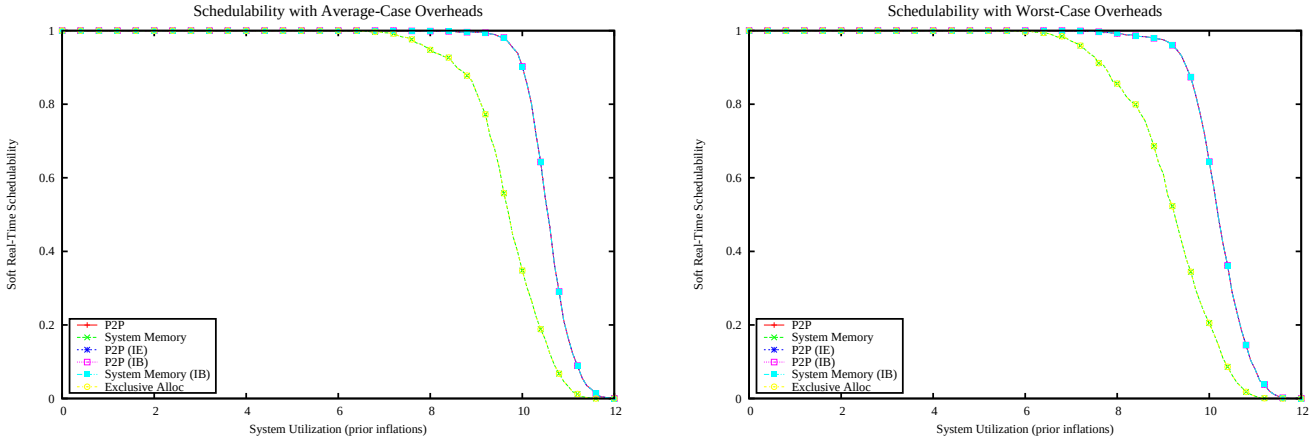

Figure 1852: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

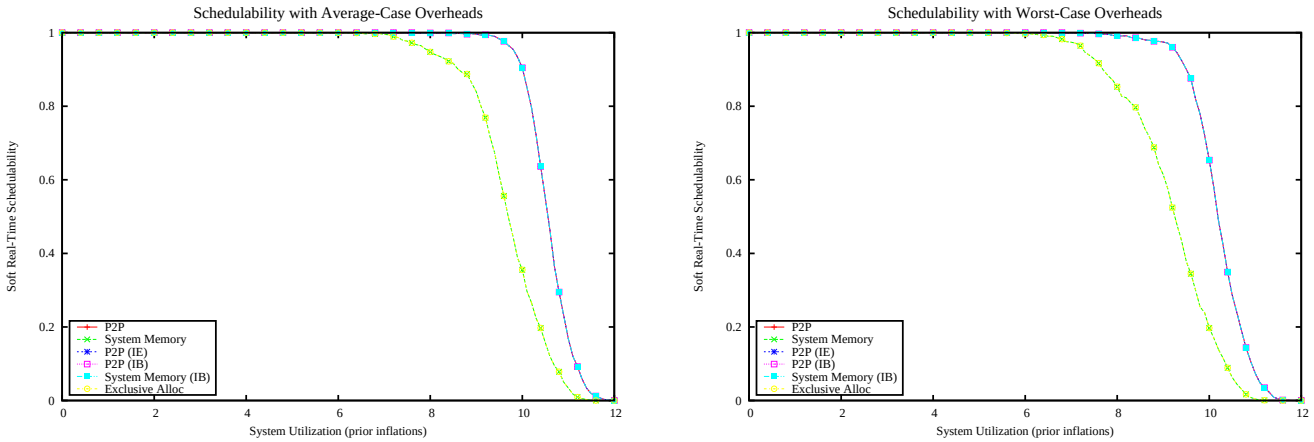

Figure 1853: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

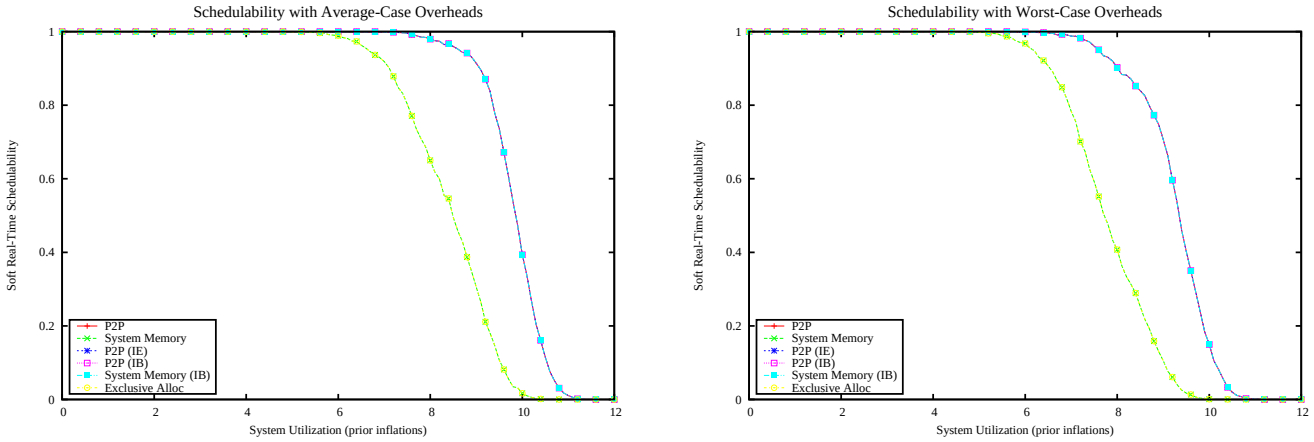

Figure 1854: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

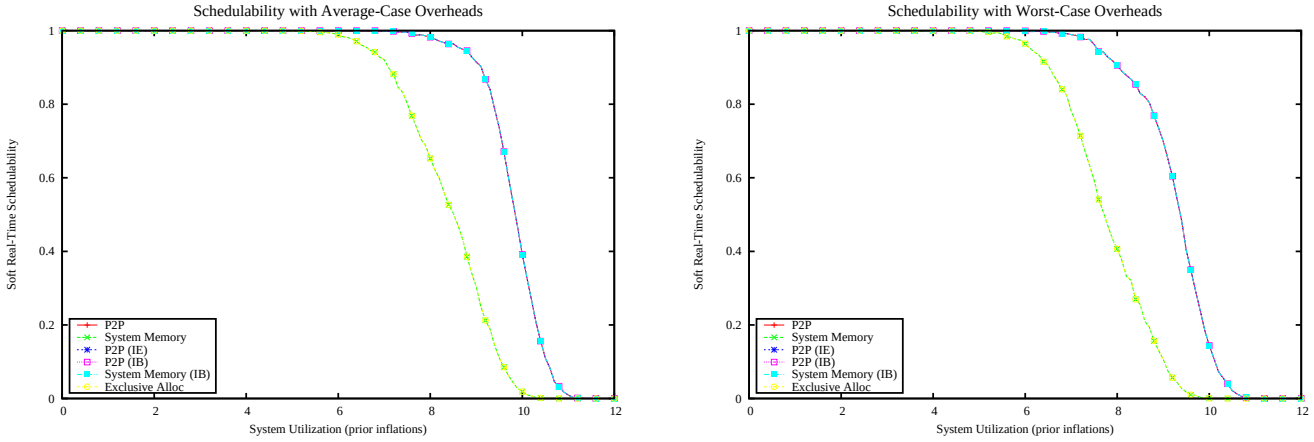

Figure 1855: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

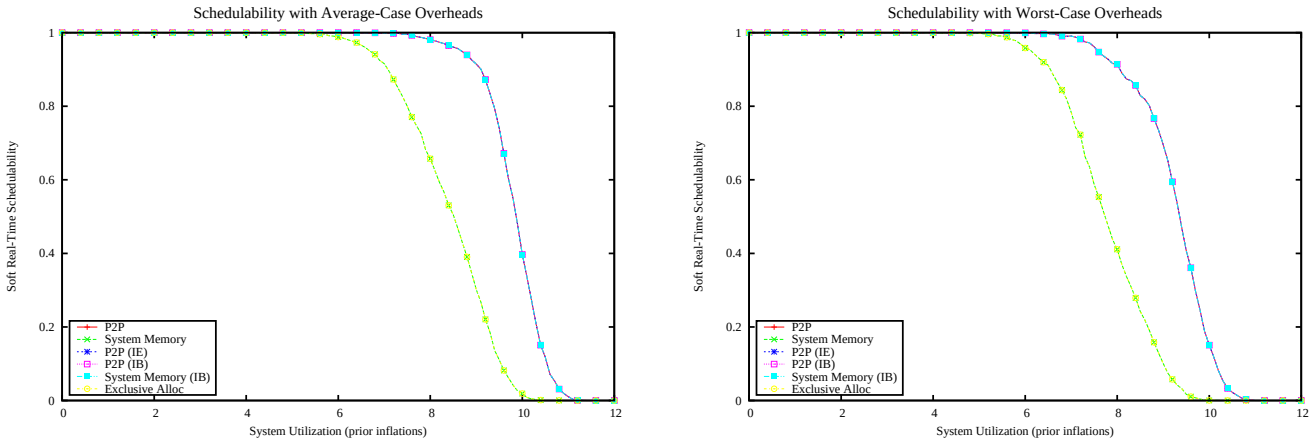

Figure 1856: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

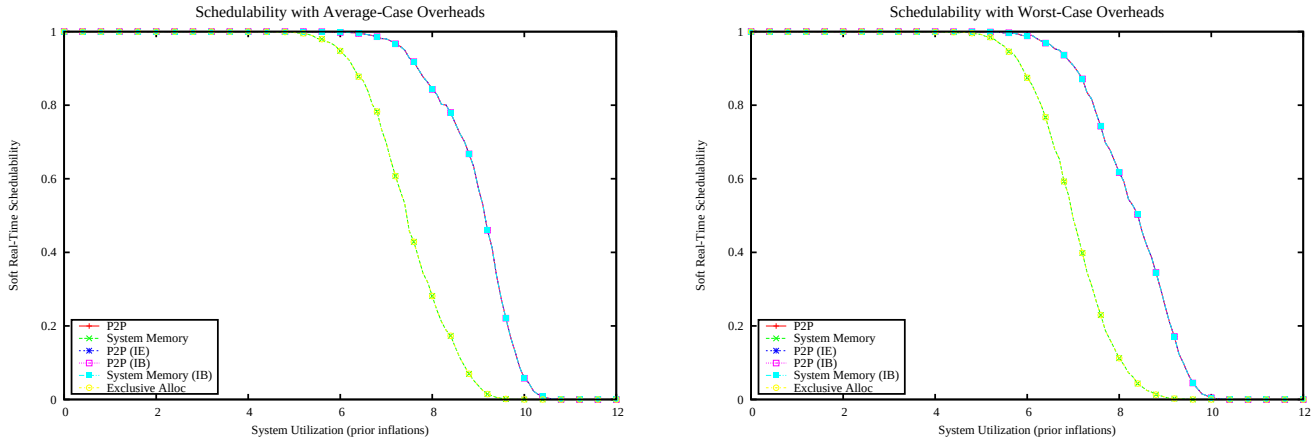

Figure 1857: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

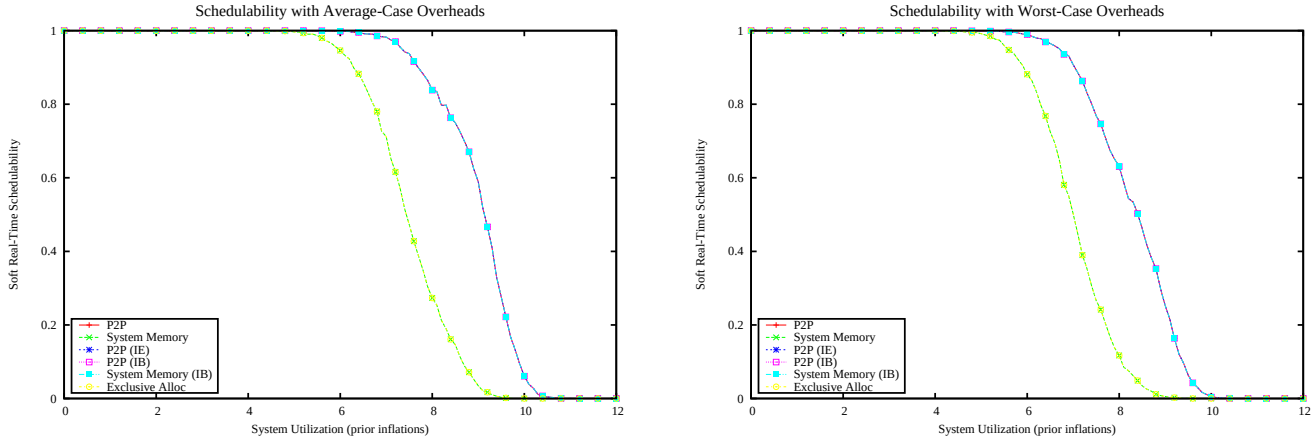

Figure 1858: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

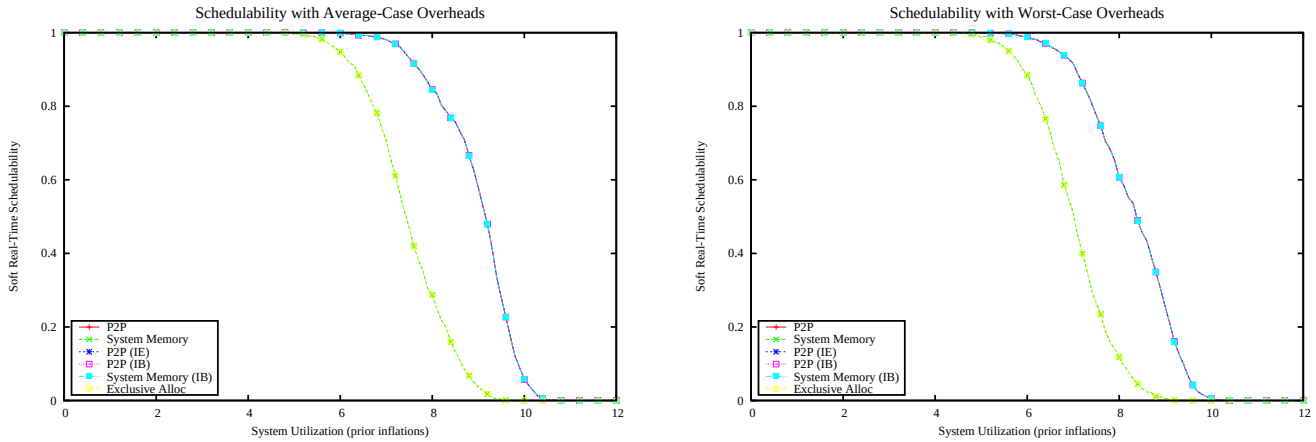

Figure 1859: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

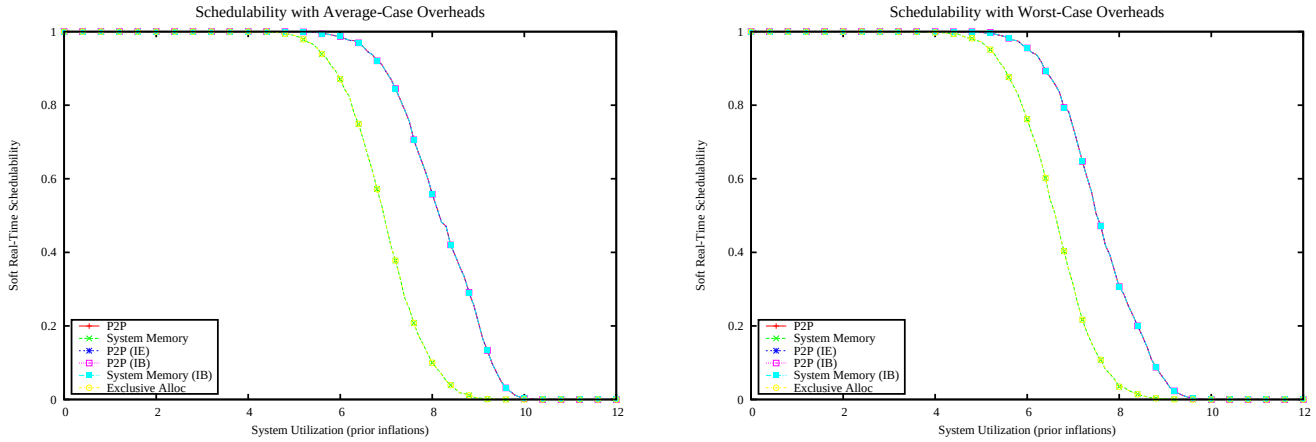

Figure 1860: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

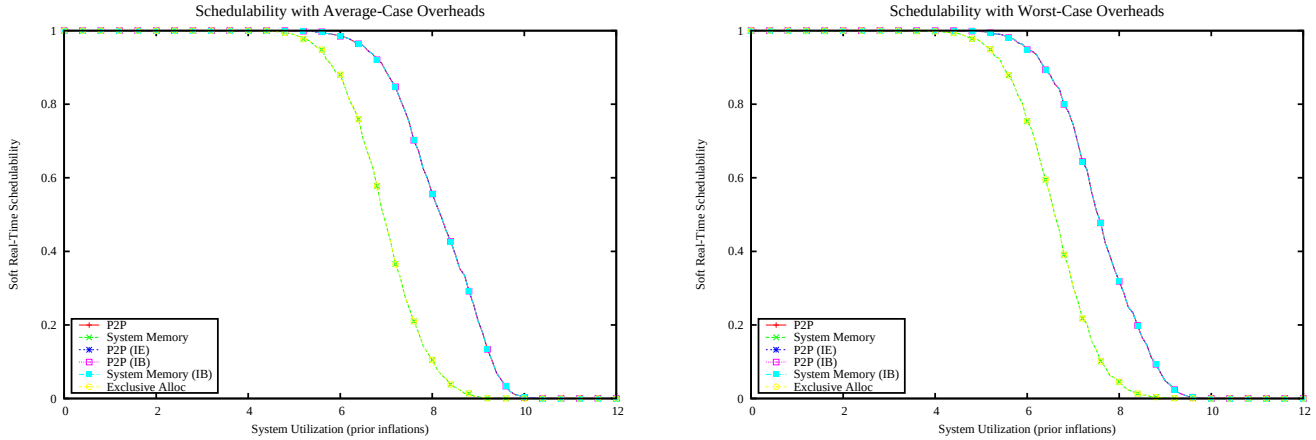

Figure 1861: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

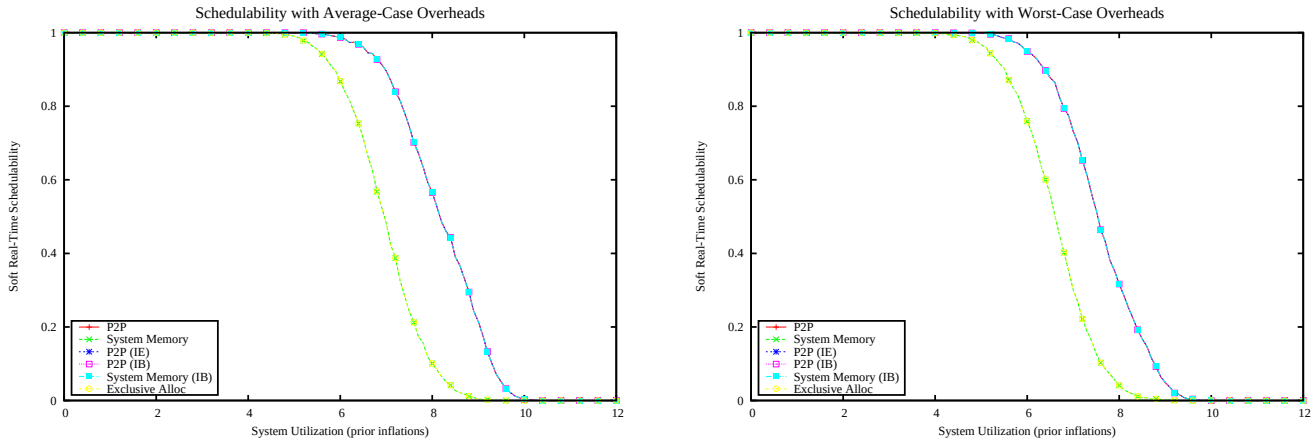

Figure 1862: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

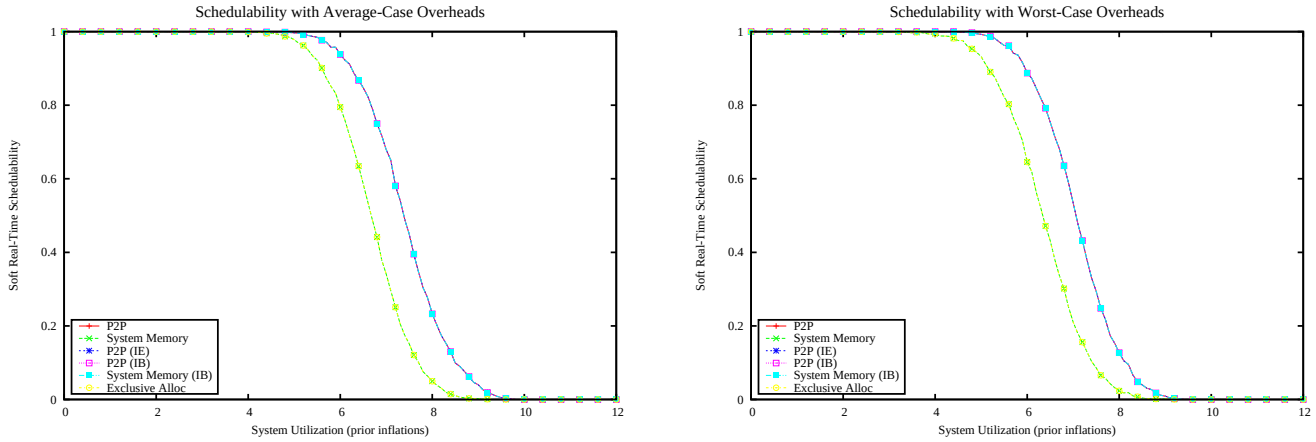

Figure 1863: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

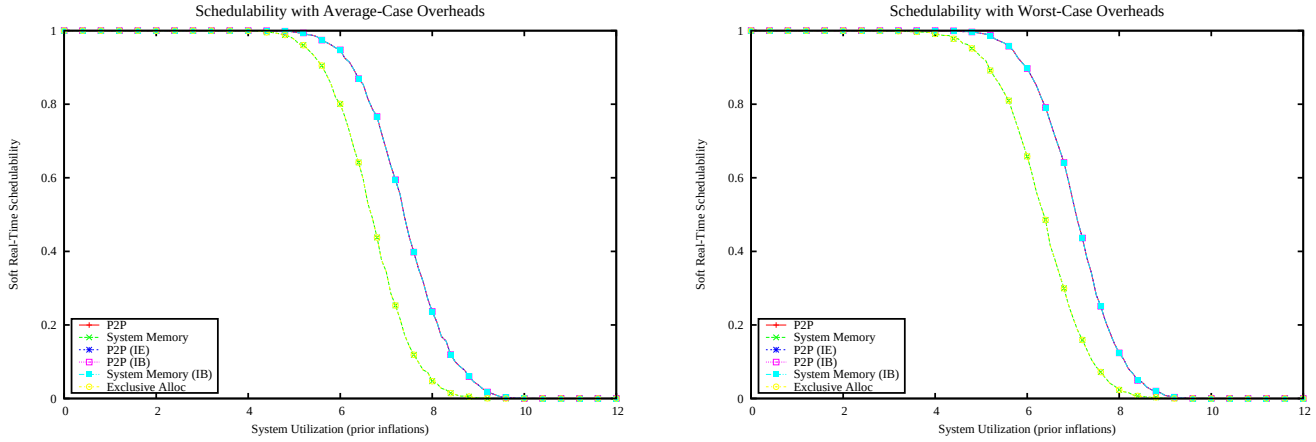

Figure 1864: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

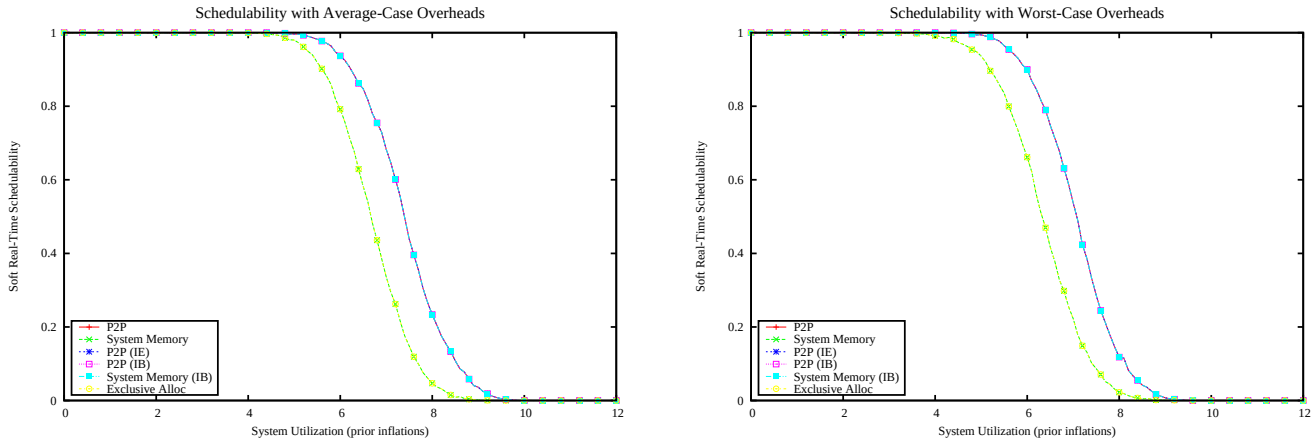

Figure 1865: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

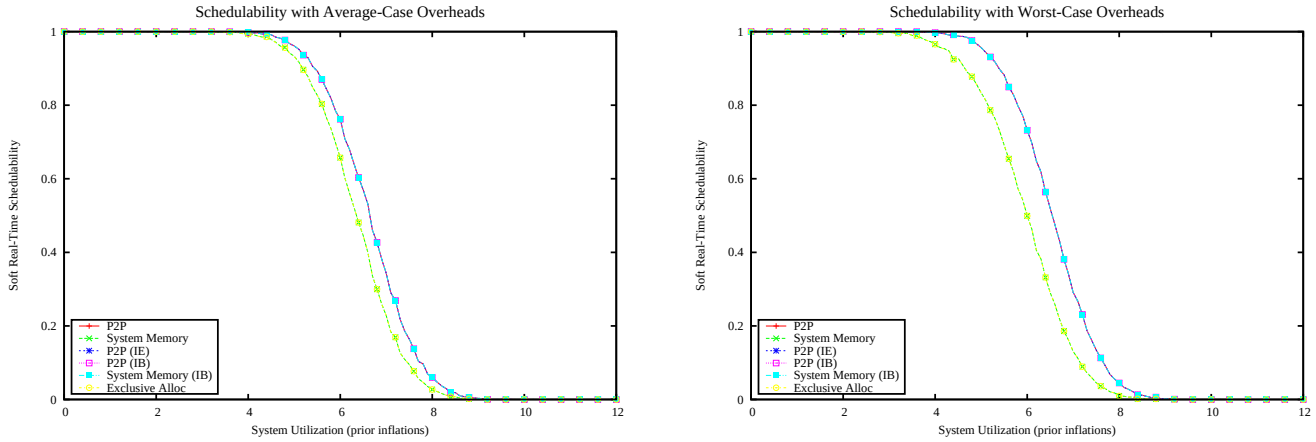

Figure 1866: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

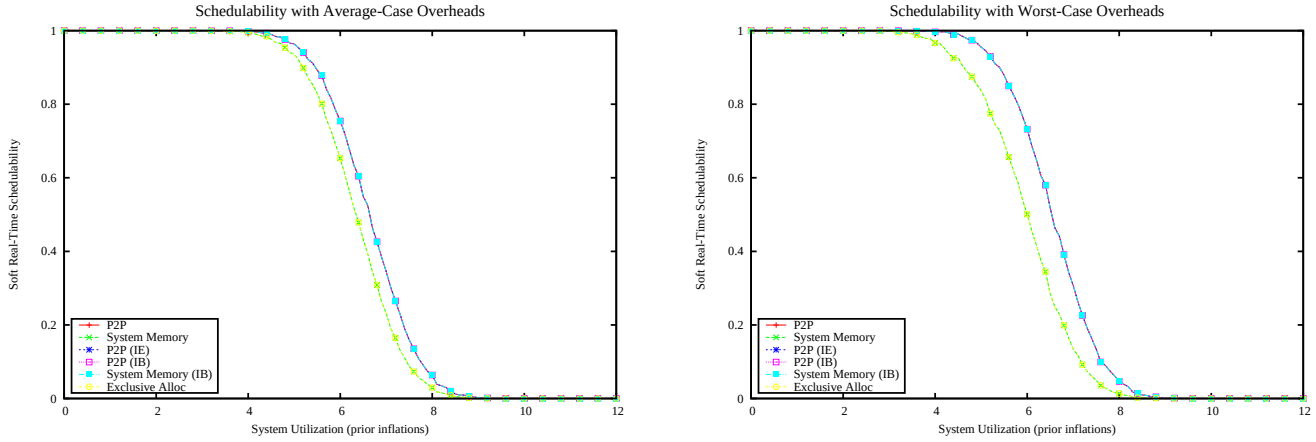

Figure 1867: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

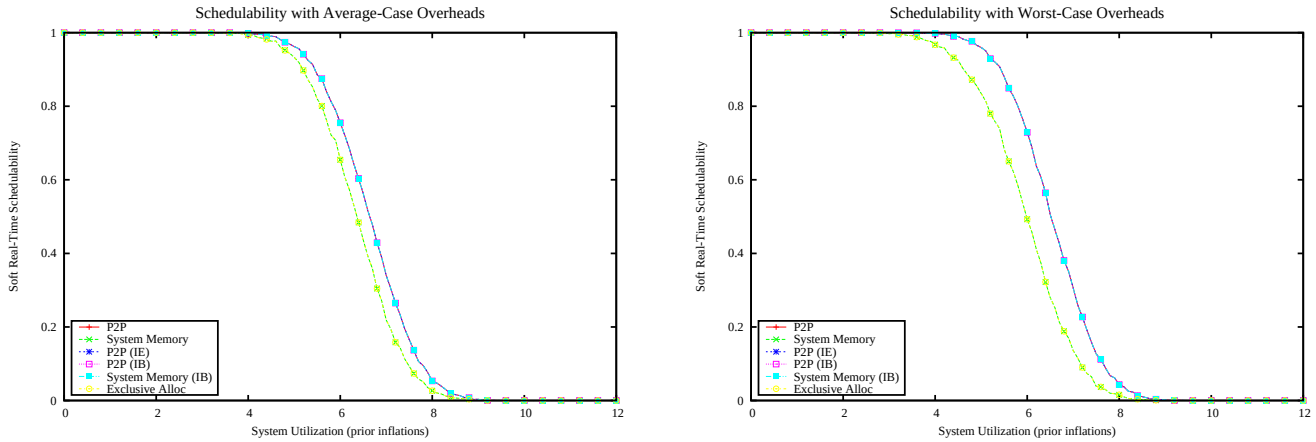

Figure 1868: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

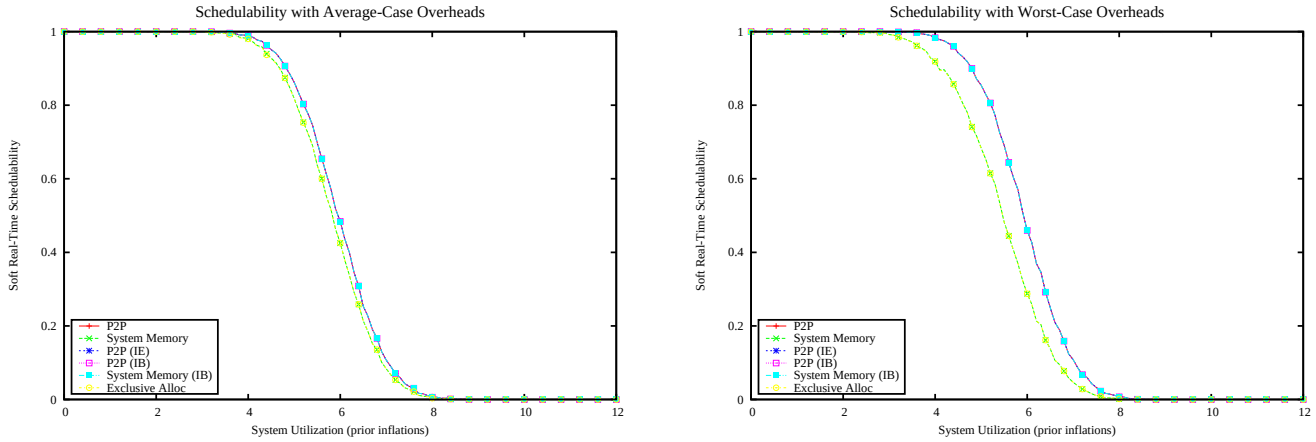

Figure 1869: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

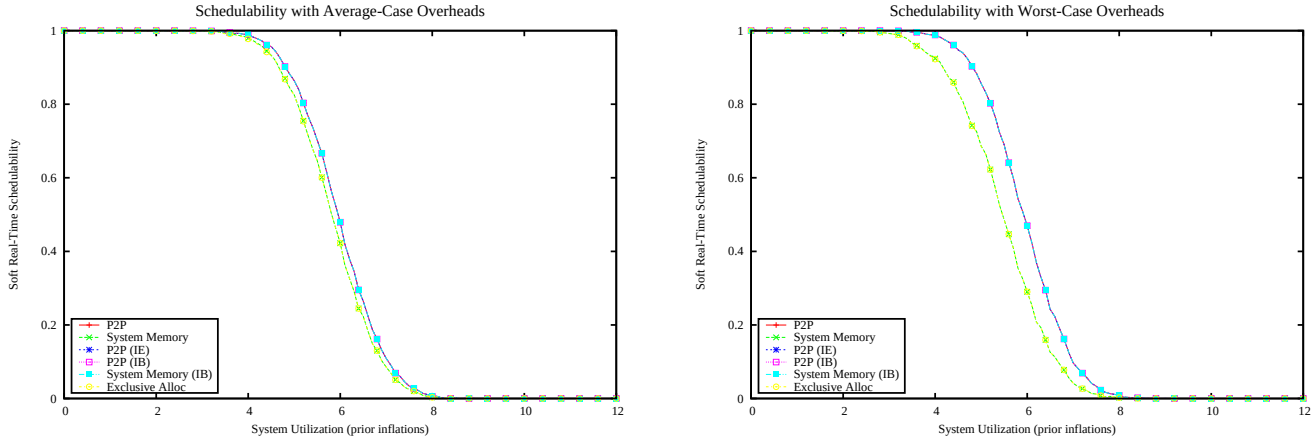

Figure 1870: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

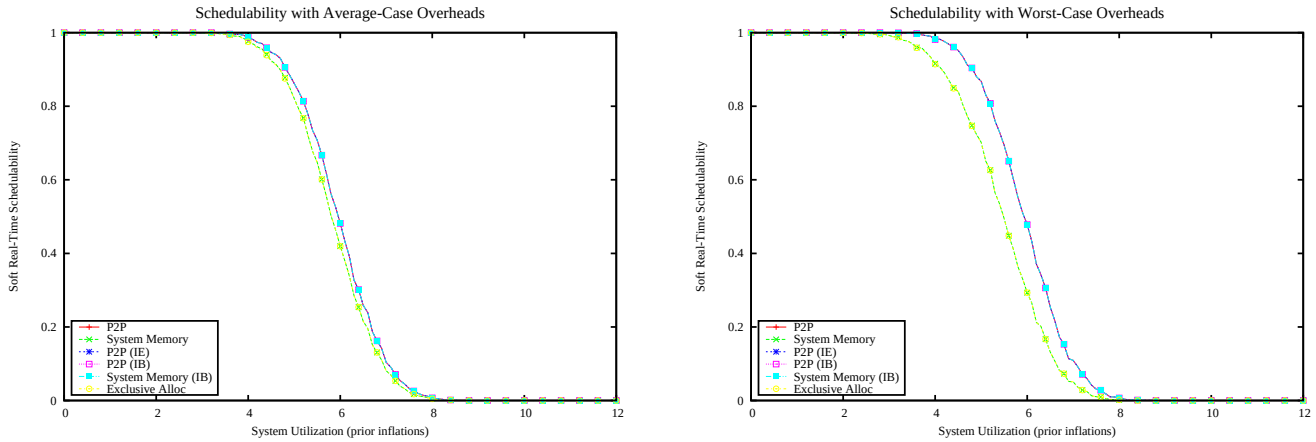

Figure 1871: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

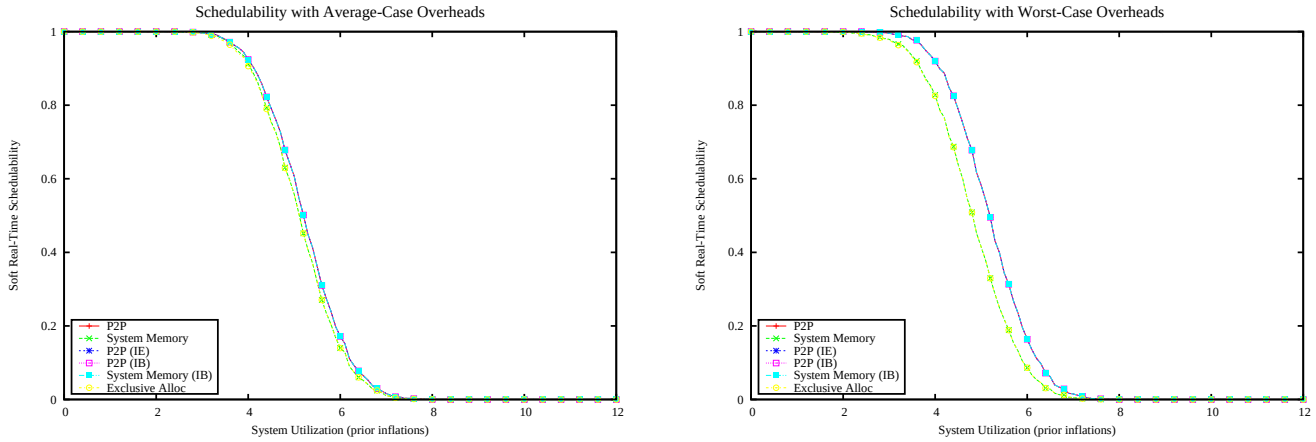

Figure 1872: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

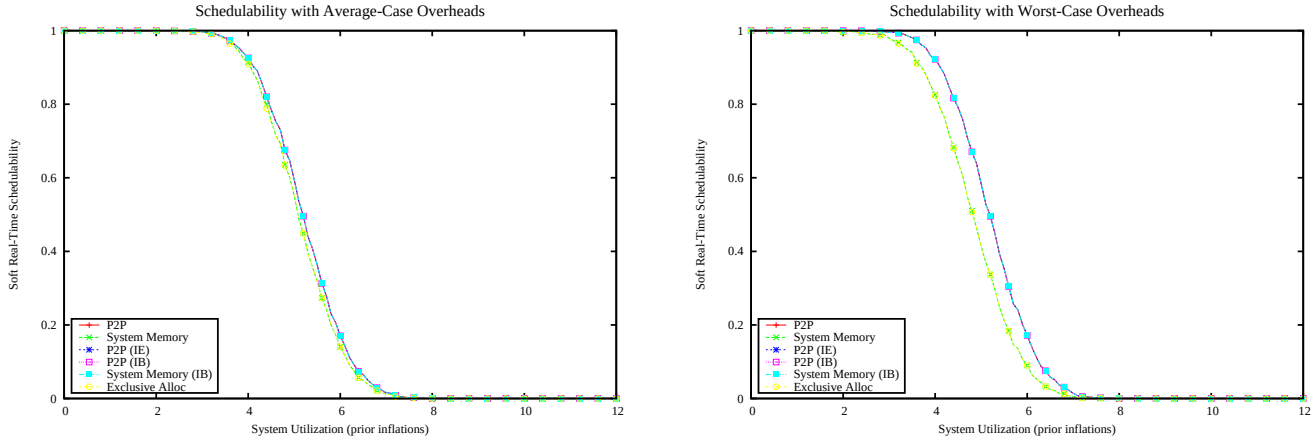

Figure 1873: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

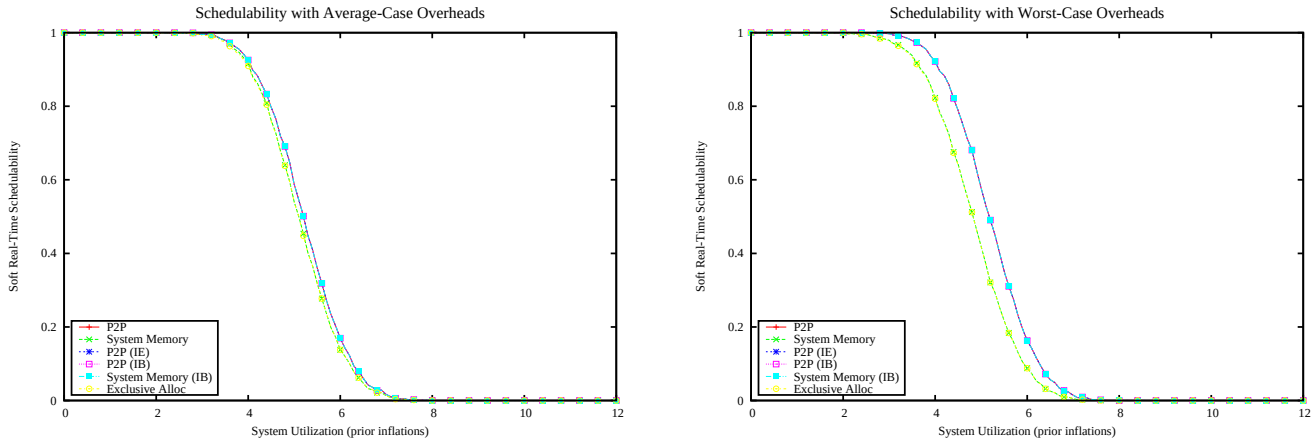

Figure 1874: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

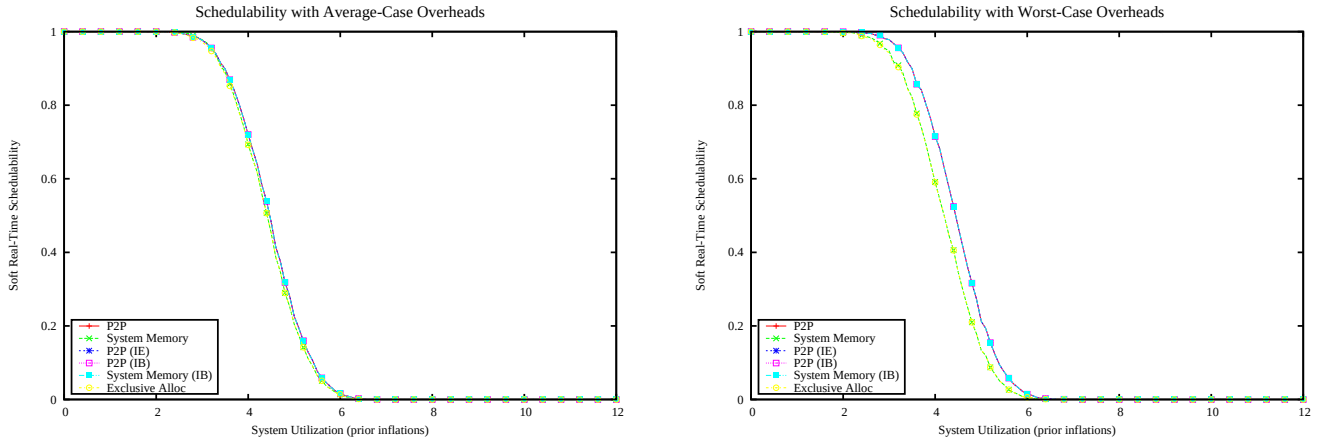

Figure 1875: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

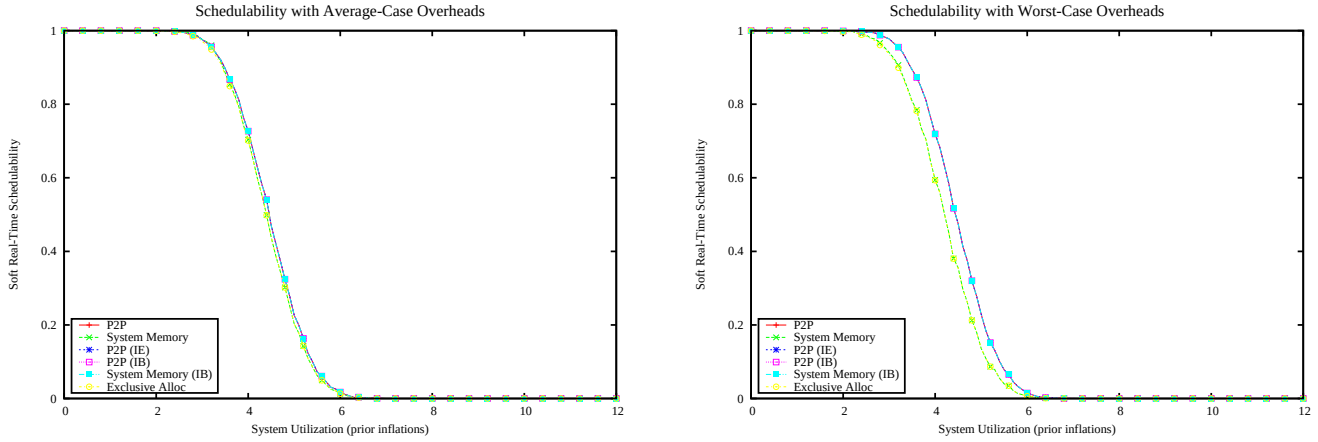

Figure 1876: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

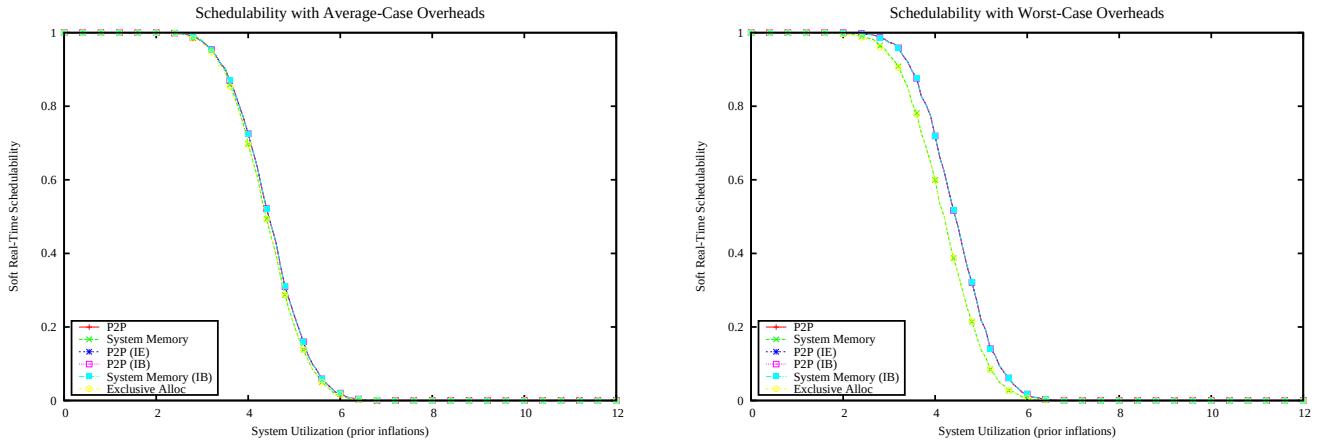

Figure 1877: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

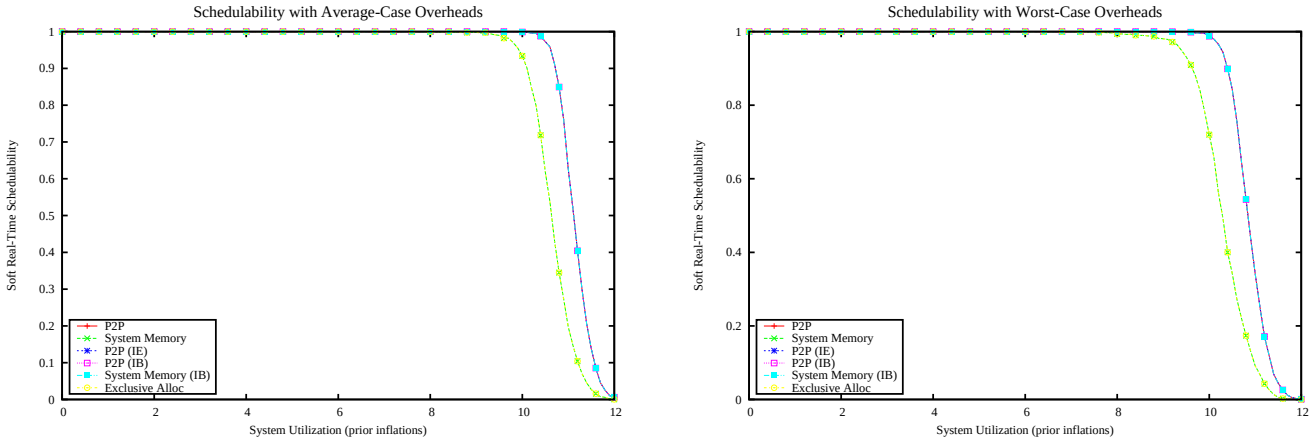

Figure 1878: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

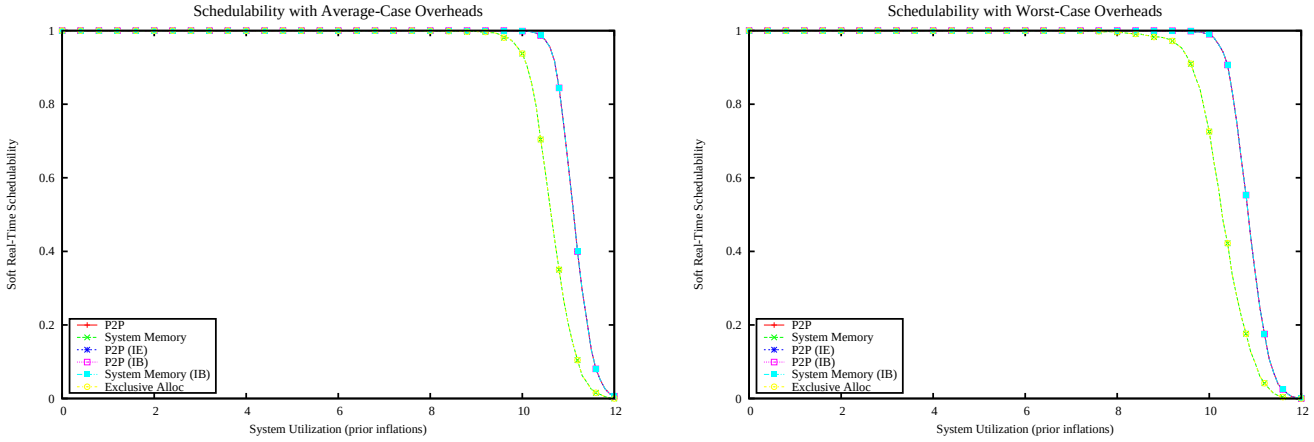

Figure 1879: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

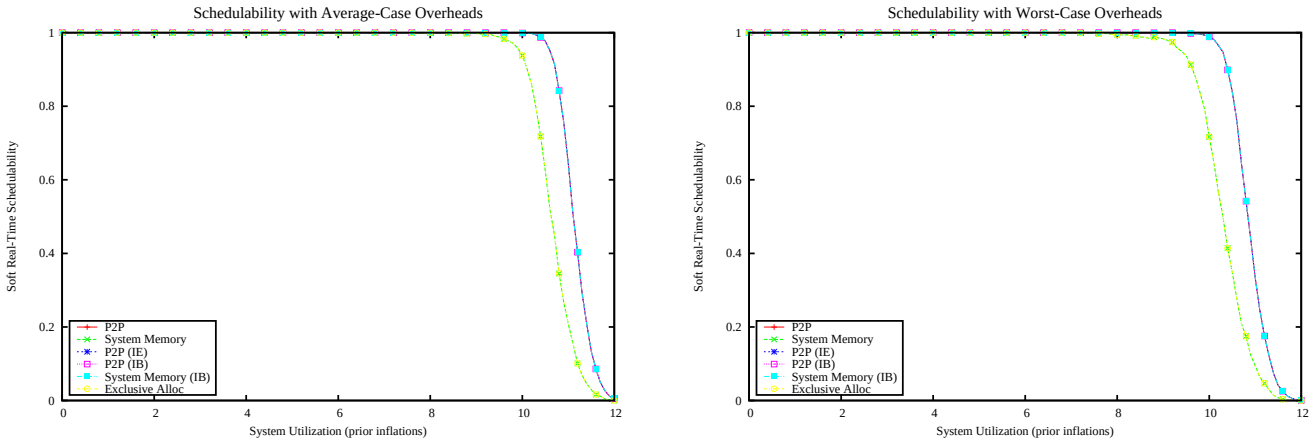

Figure 1880: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

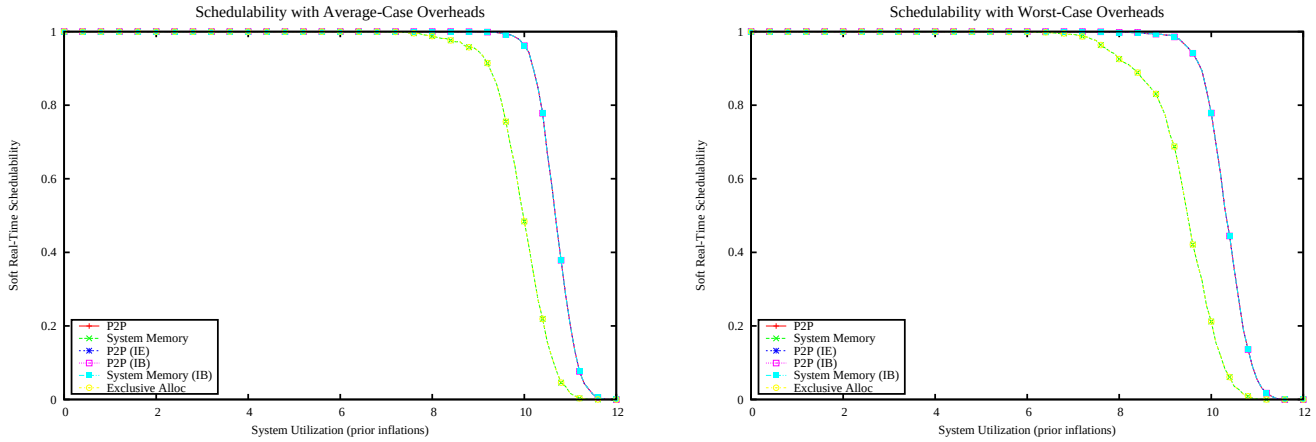

Figure 1881: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

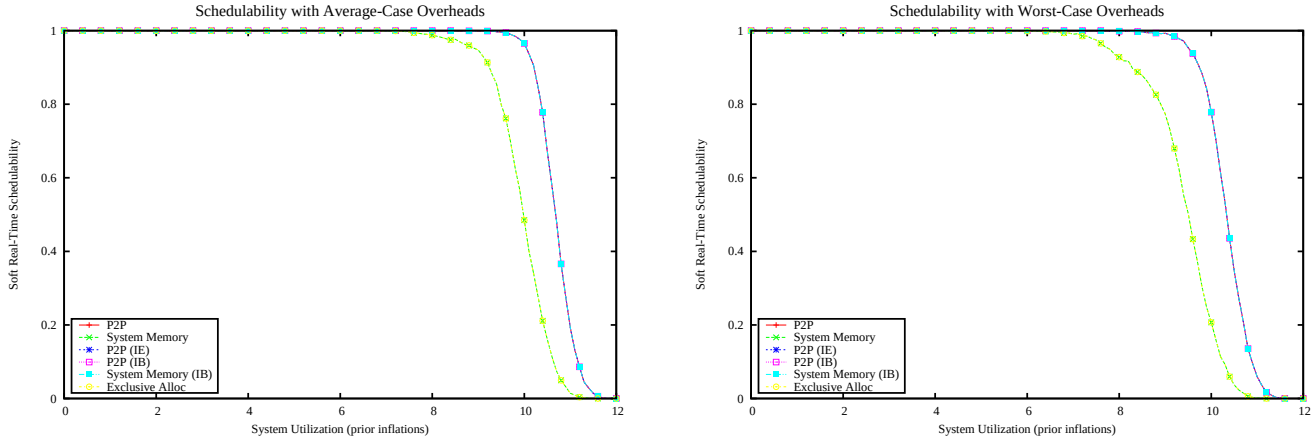

Figure 1882: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

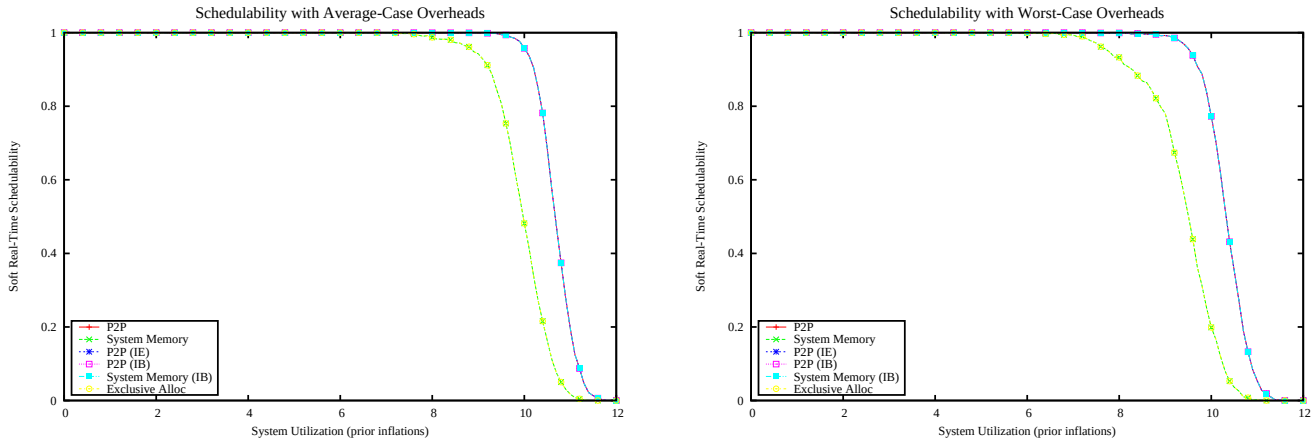

Figure 1883: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

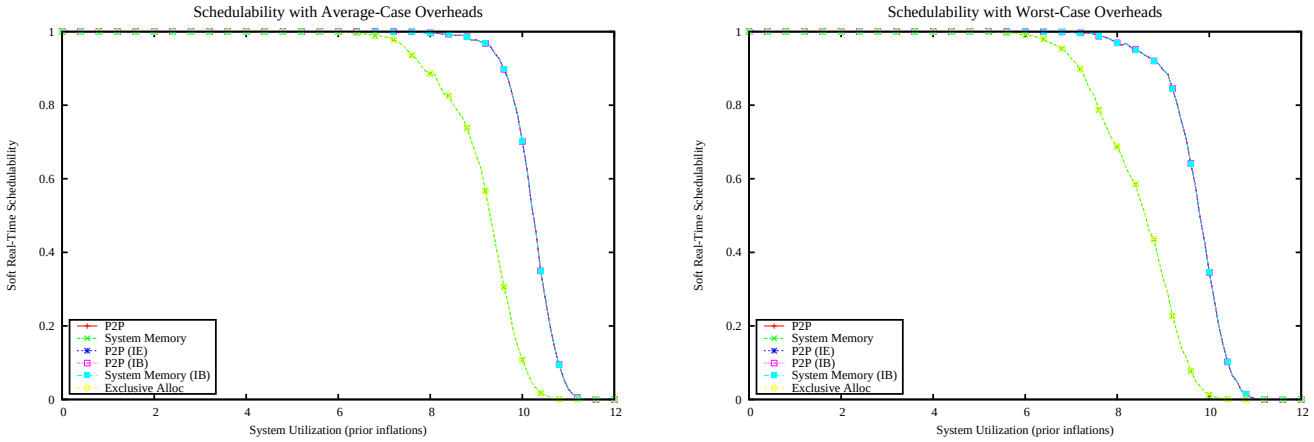

Figure 1884: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

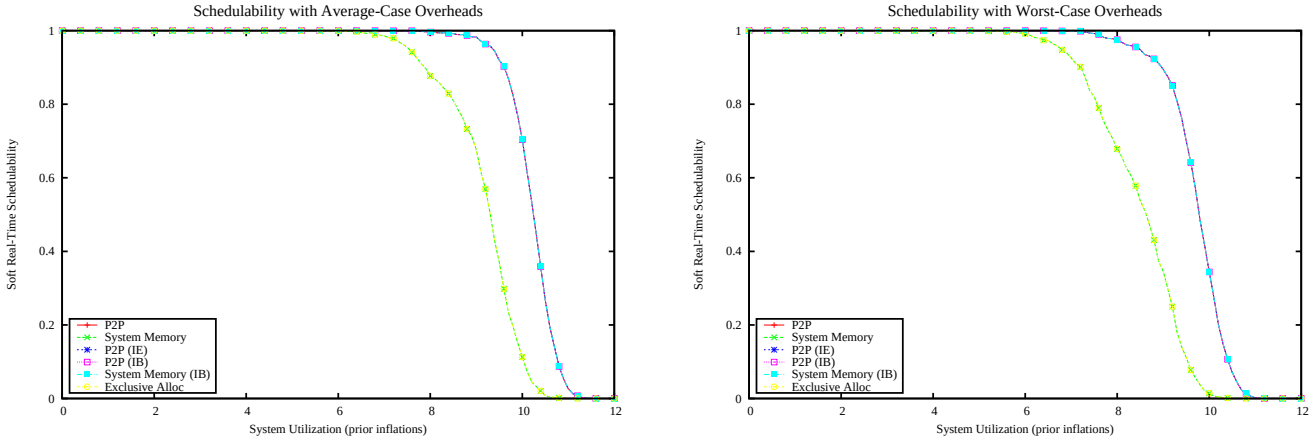

Figure 1885: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

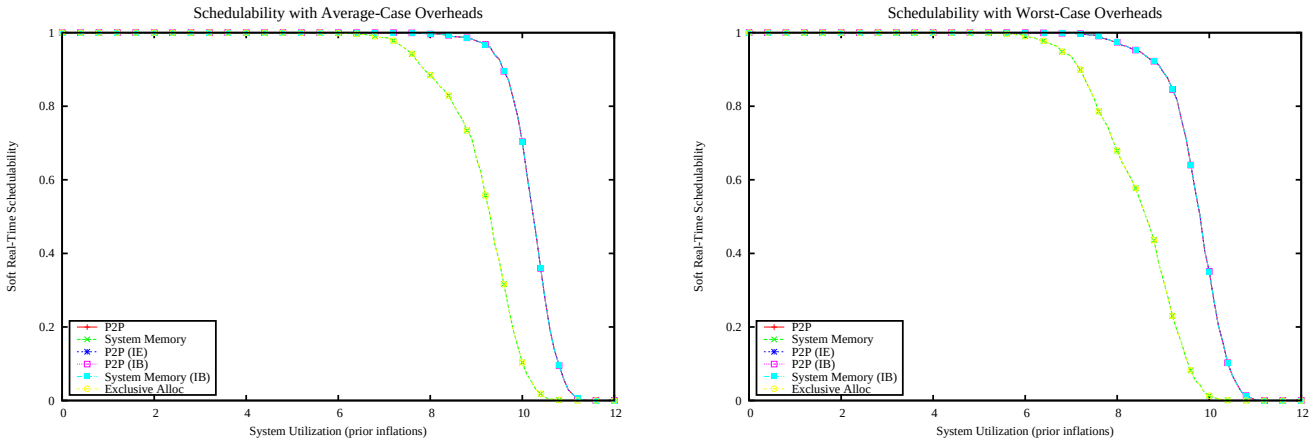

Figure 1886: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

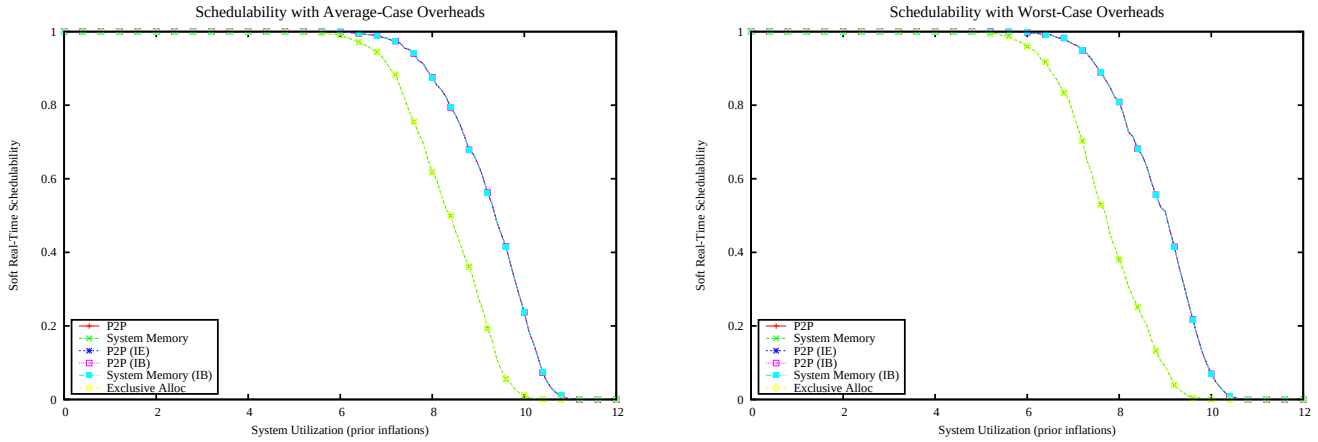

Figure 1887: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

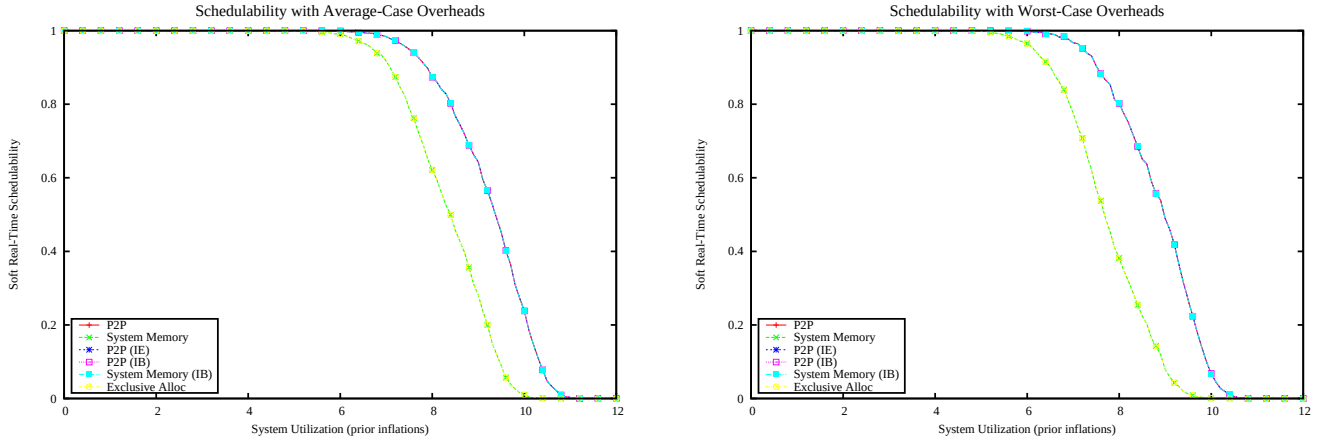

Figure 1888: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

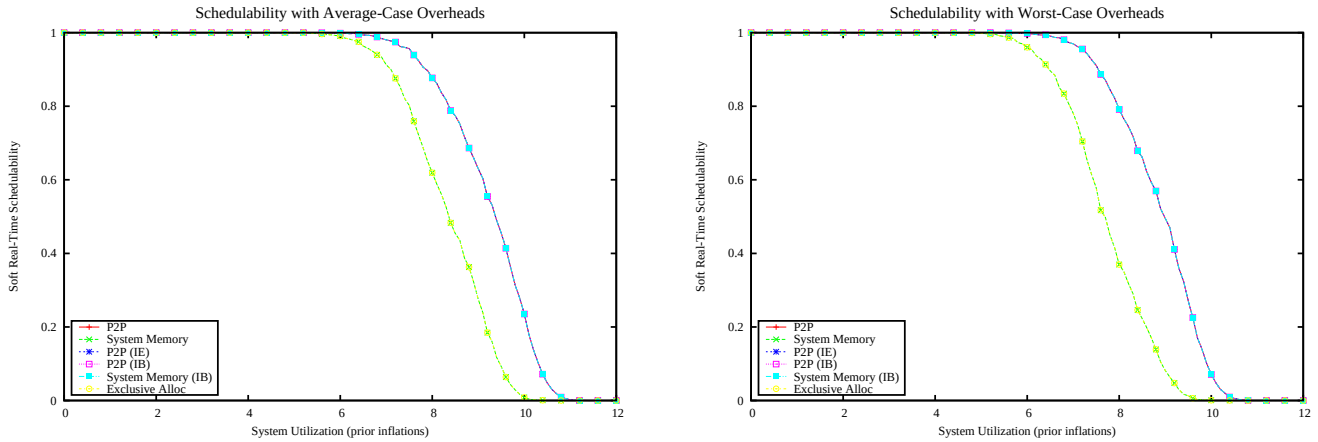

Figure 1889: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

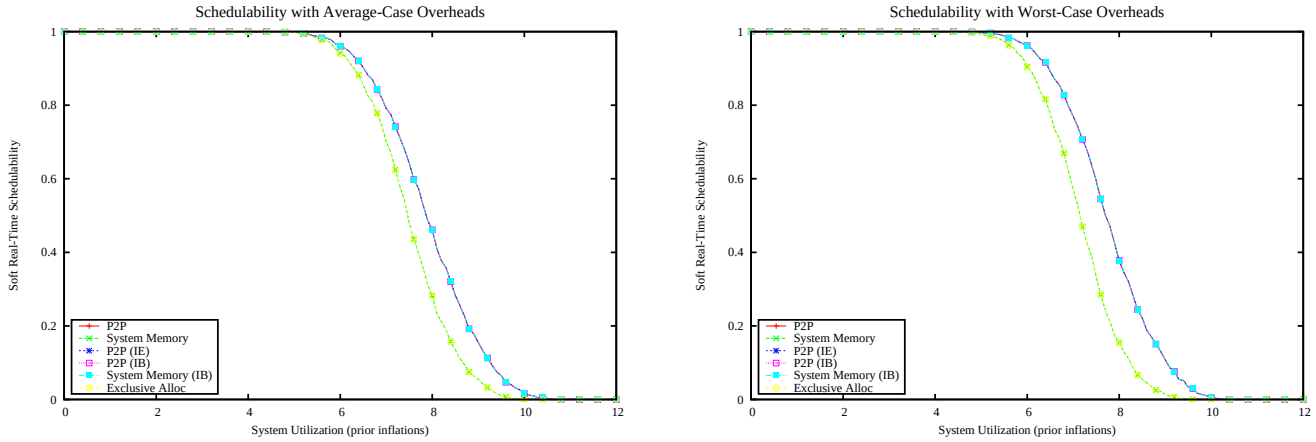

Figure 1890: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

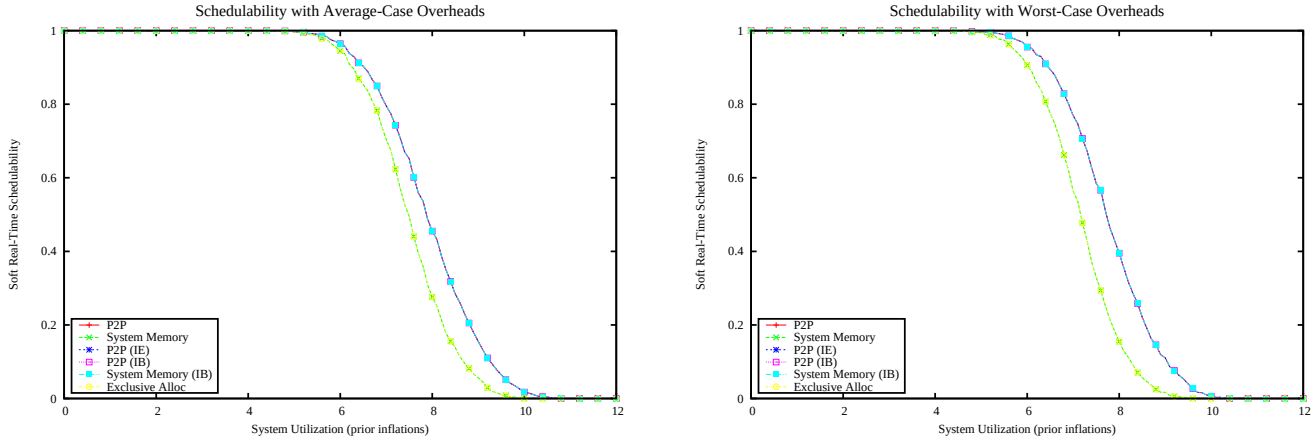

Figure 1891: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

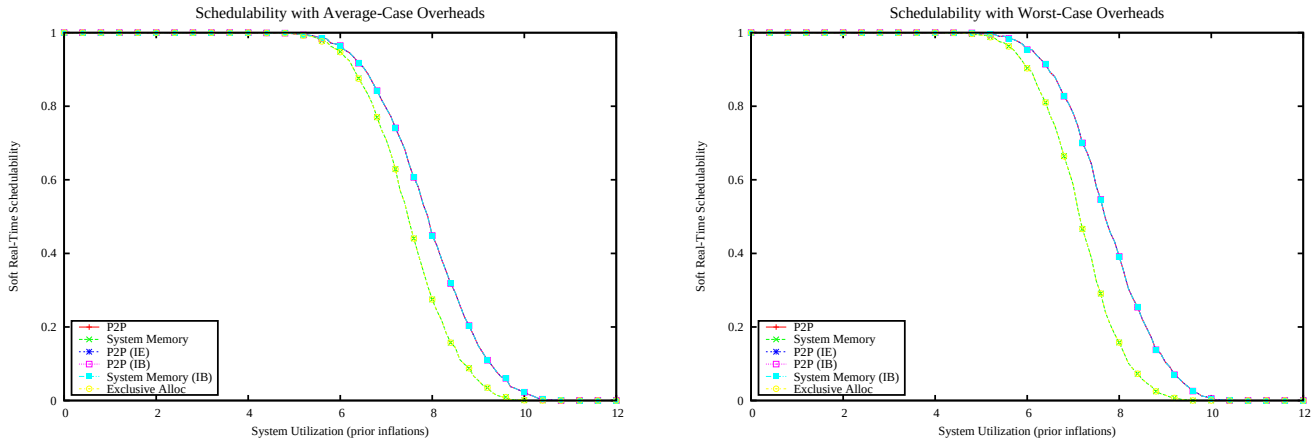

Figure 1892: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

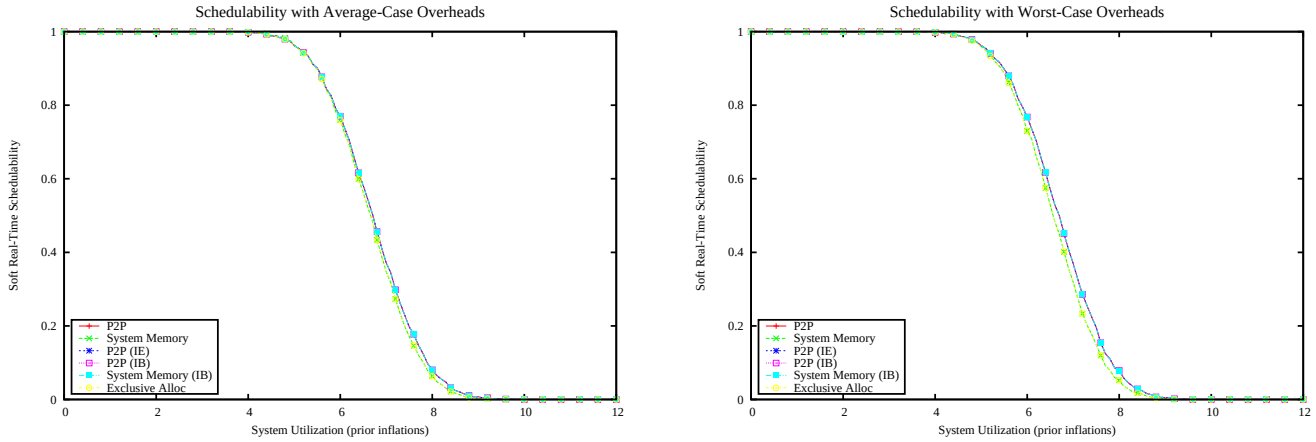

Figure 1893: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

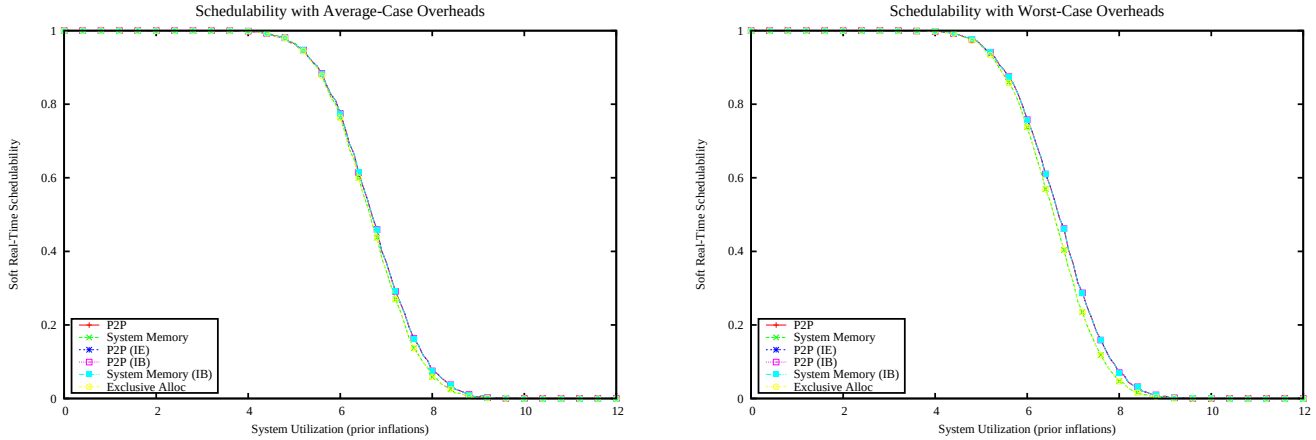

Figure 1894: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

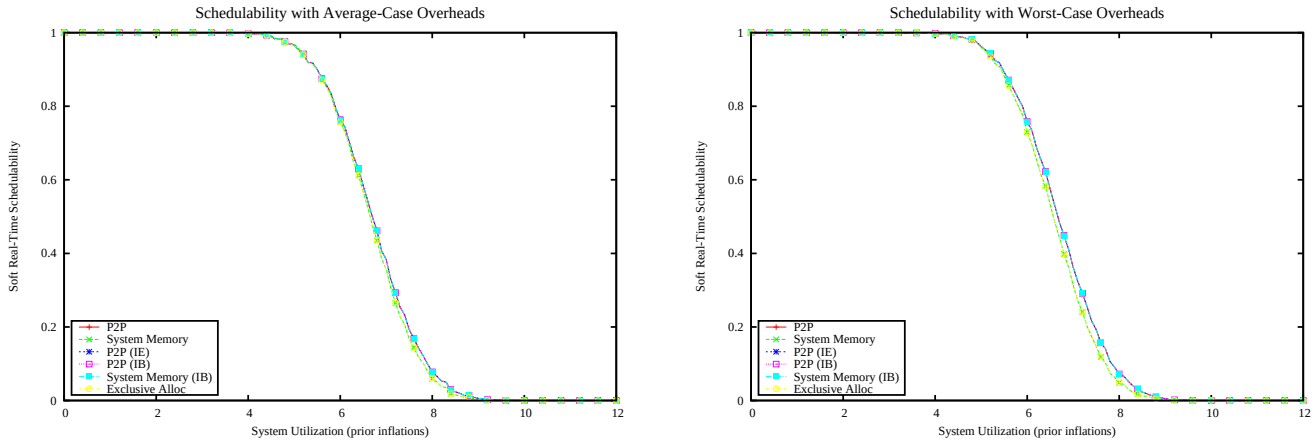

Figure 1895: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

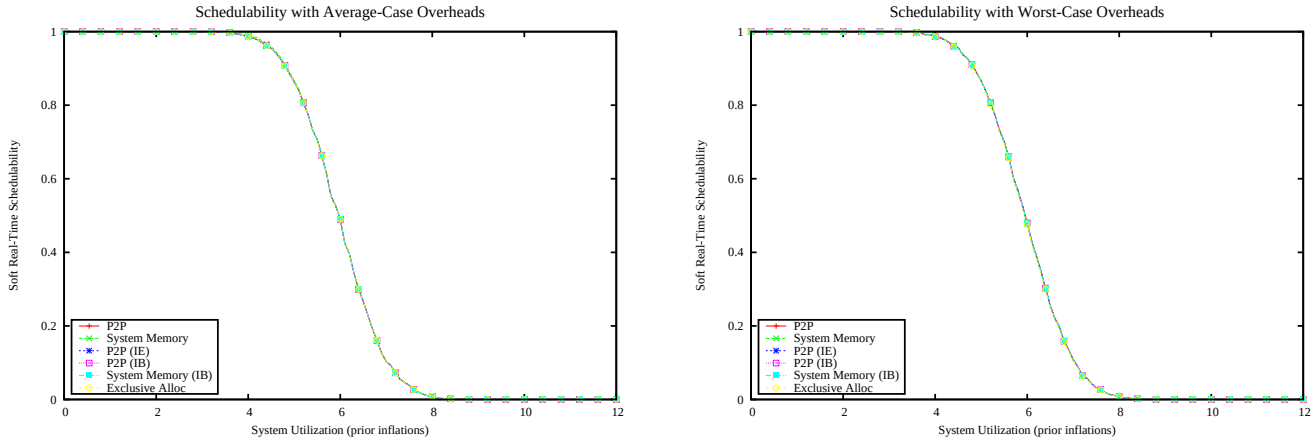

Figure 1896: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

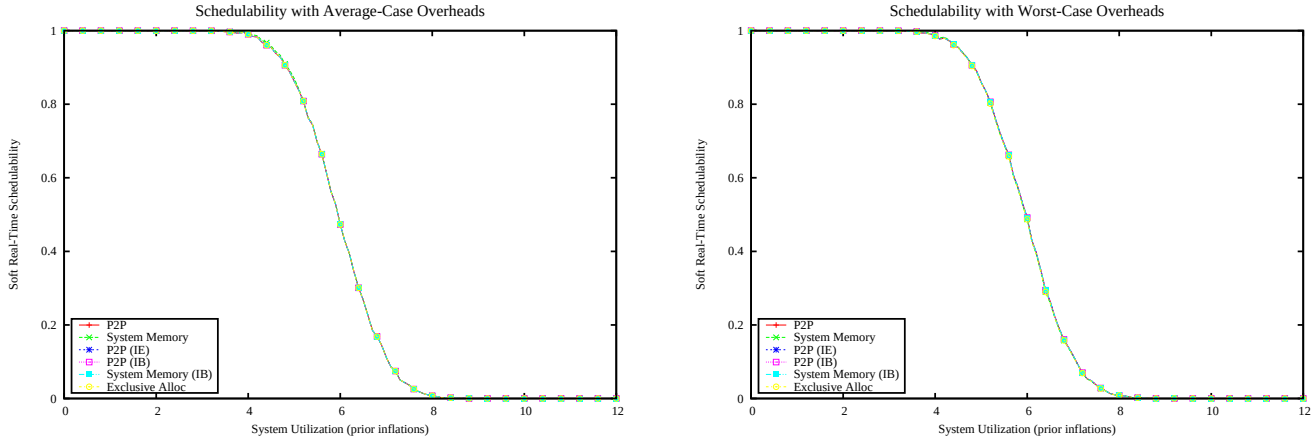

Figure 1897: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

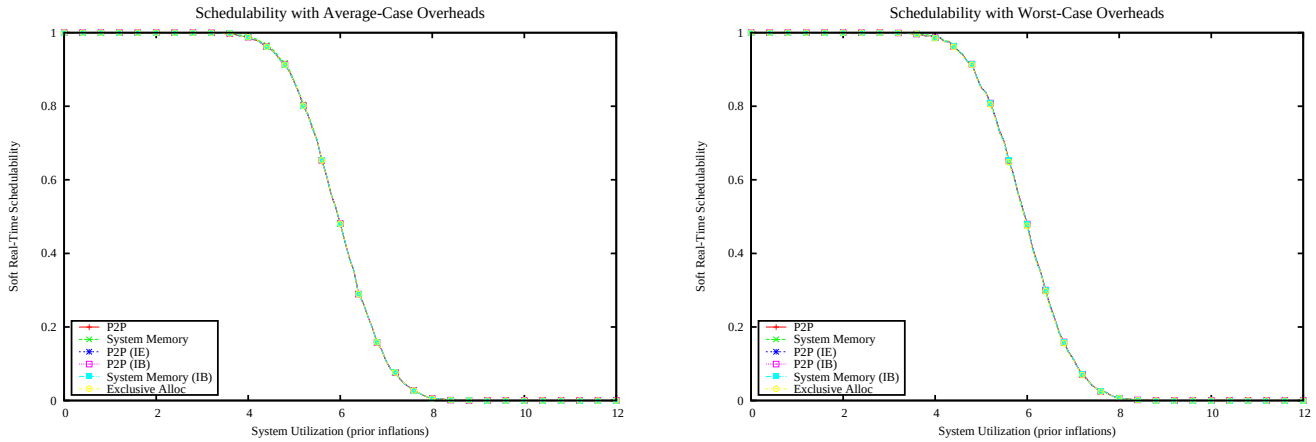

Figure 1898: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

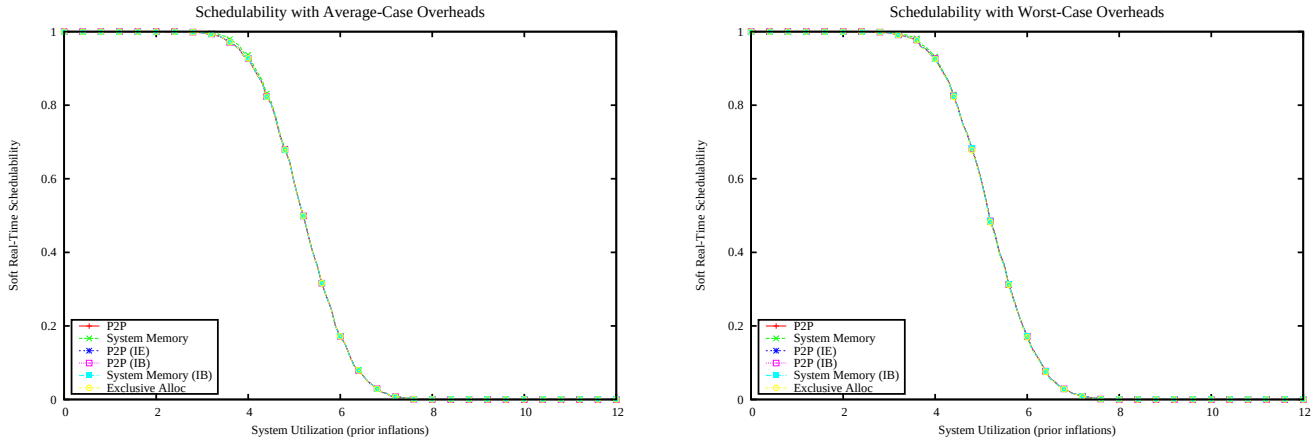

Figure 1899: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

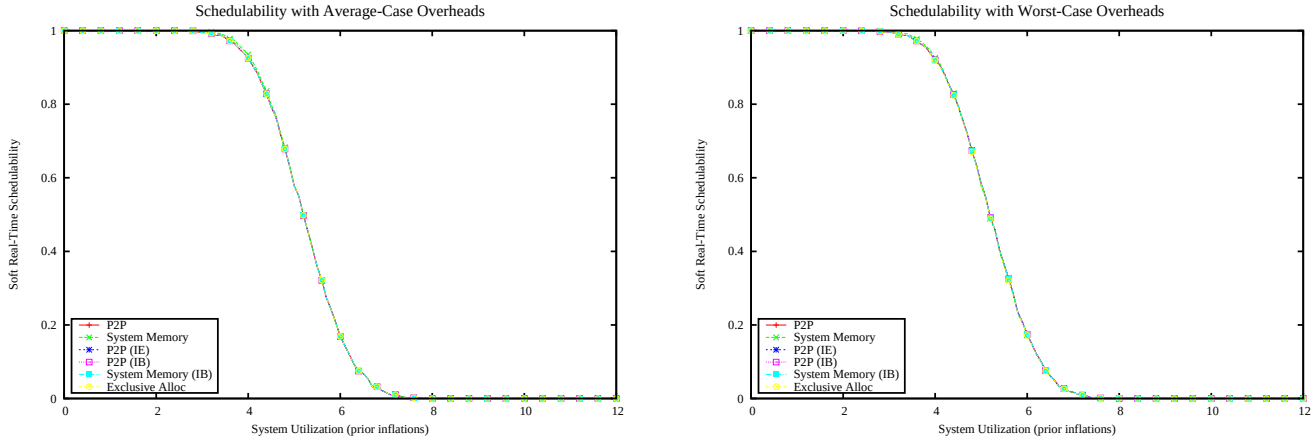

Figure 1900: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

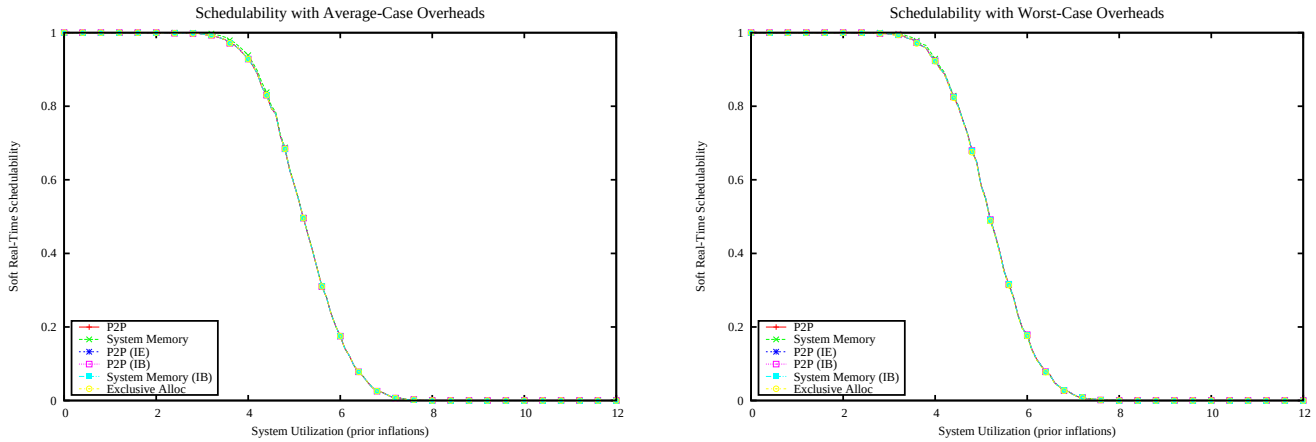

Figure 1901: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

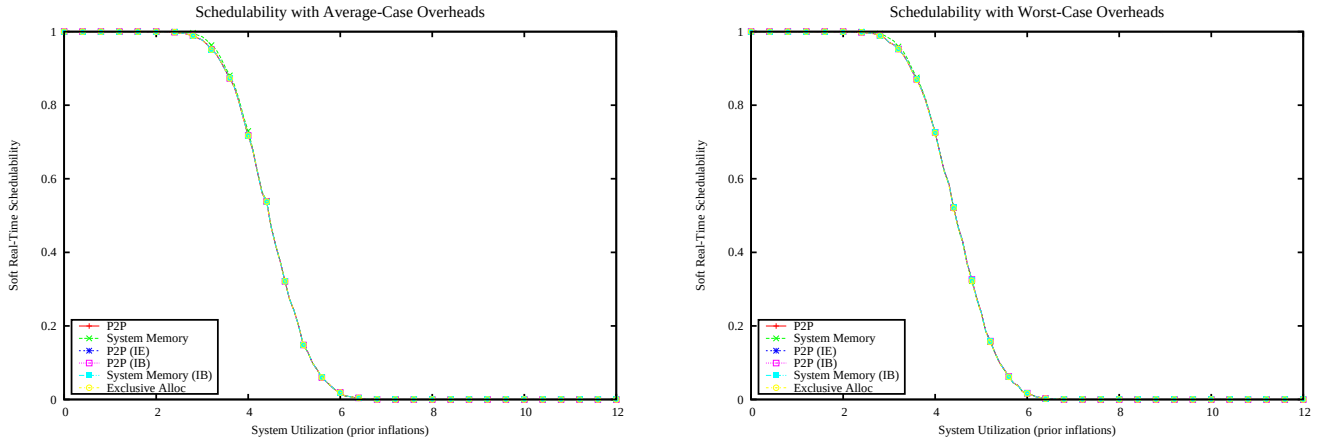

Figure 1902: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

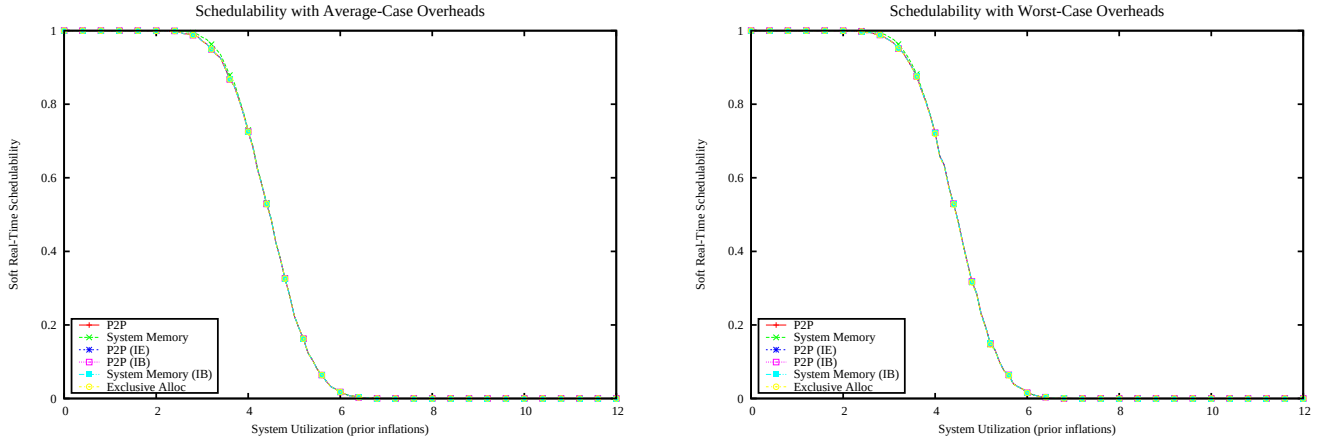

Figure 1903: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

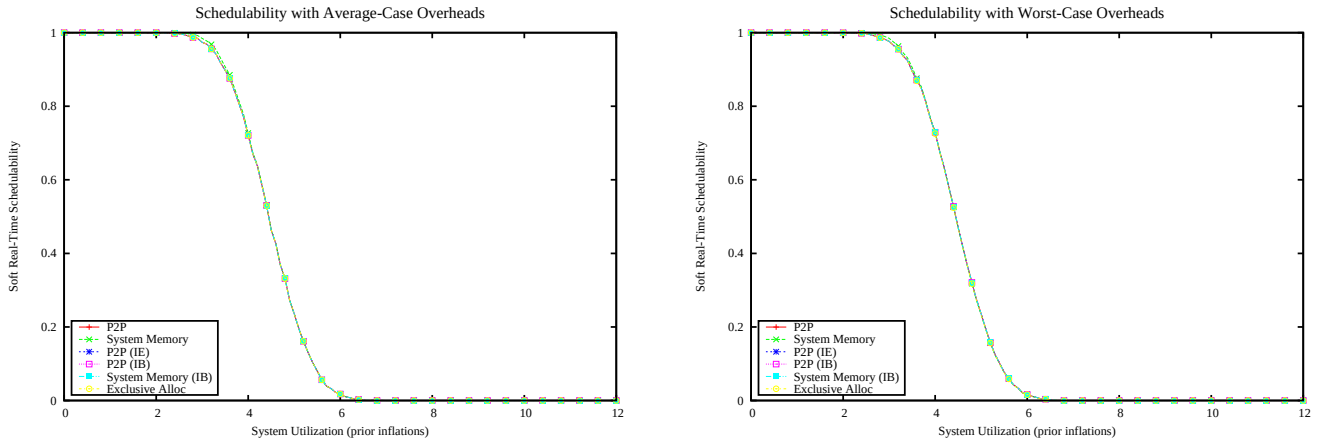

Figure 1904: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

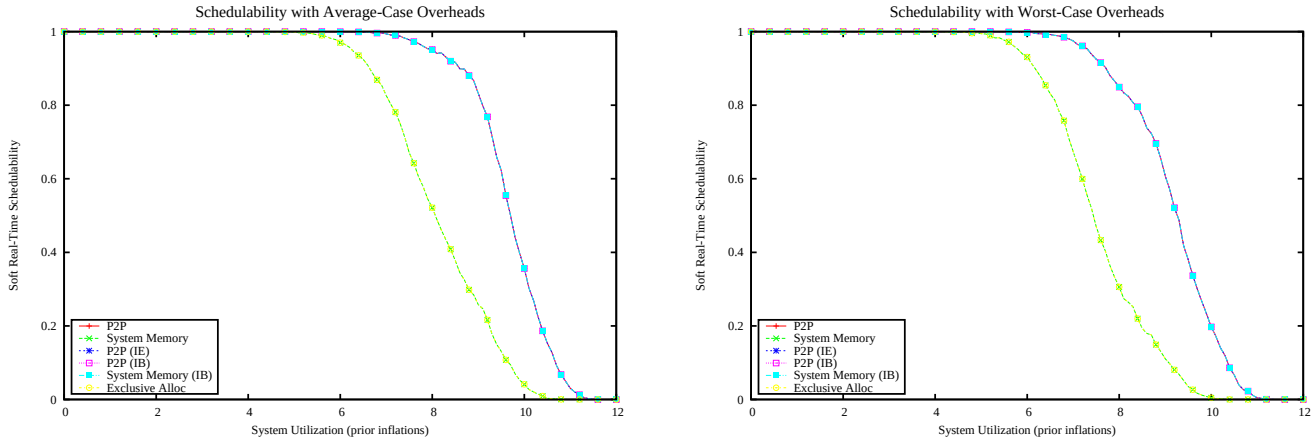

Figure 1905: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

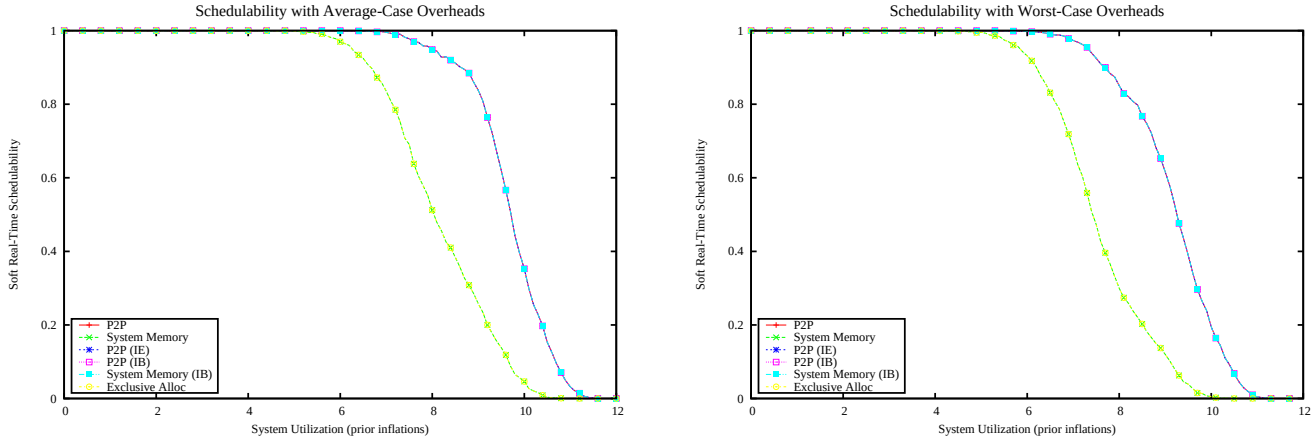

Figure 1906: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

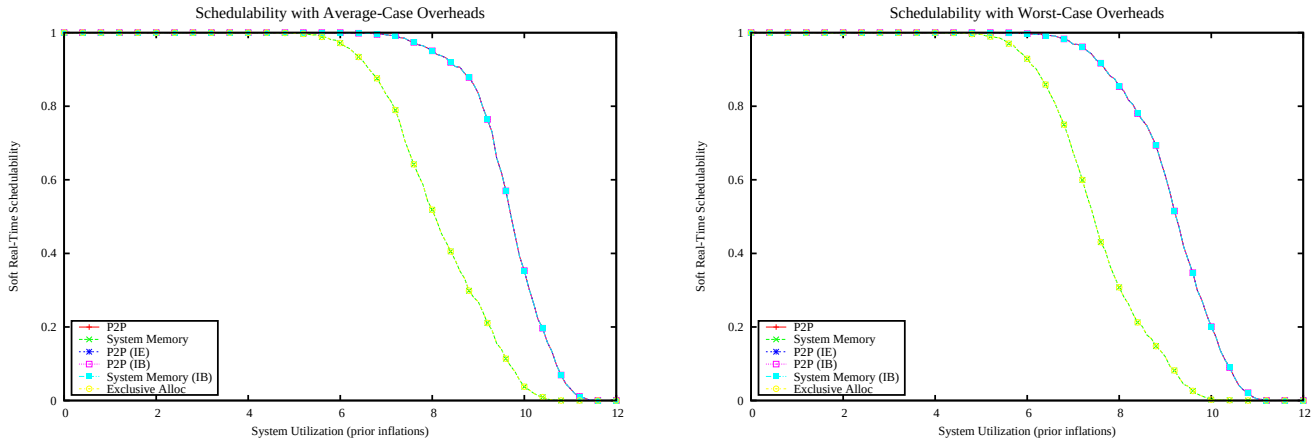

Figure 1907: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

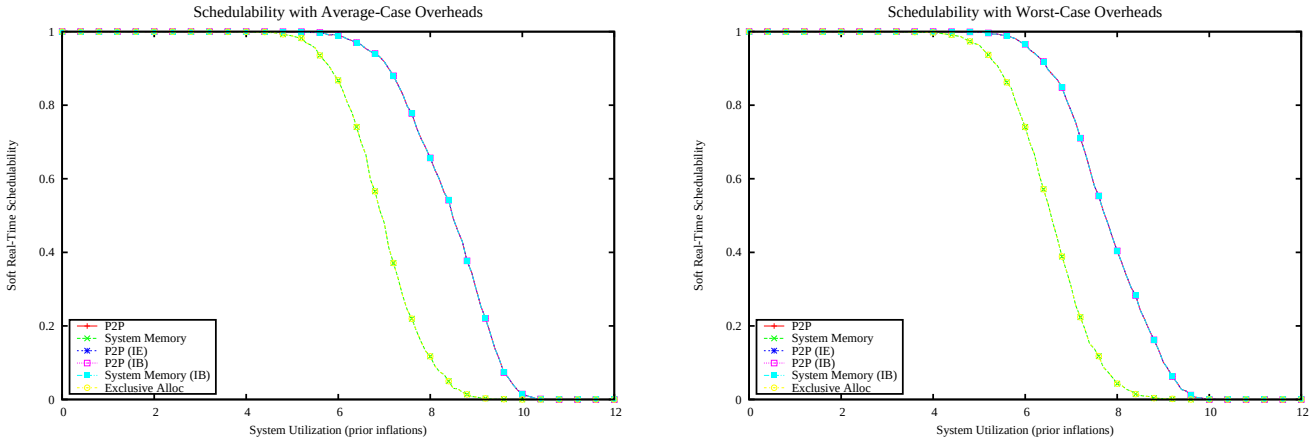

Figure 1908: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

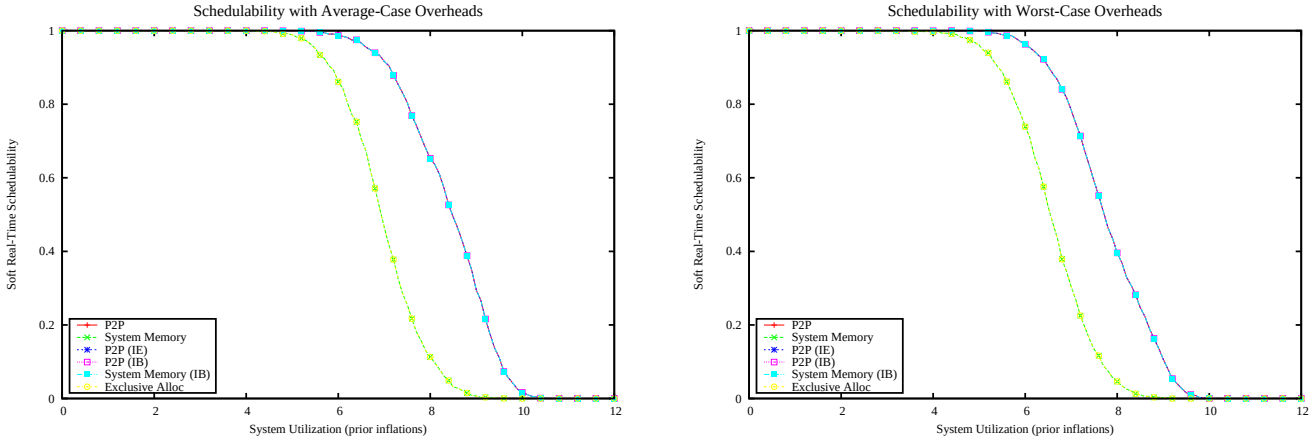

Figure 1909: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

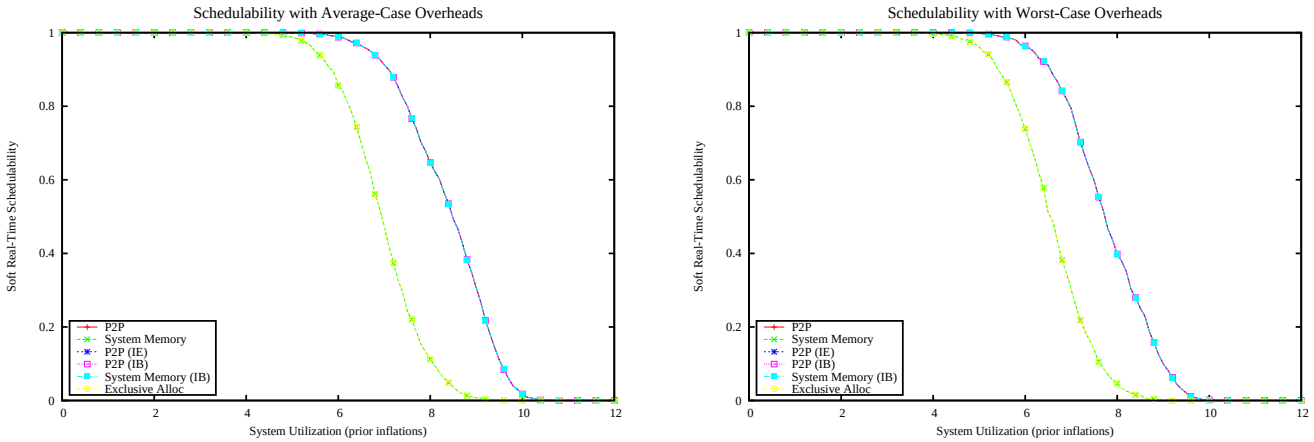

Figure 1910: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

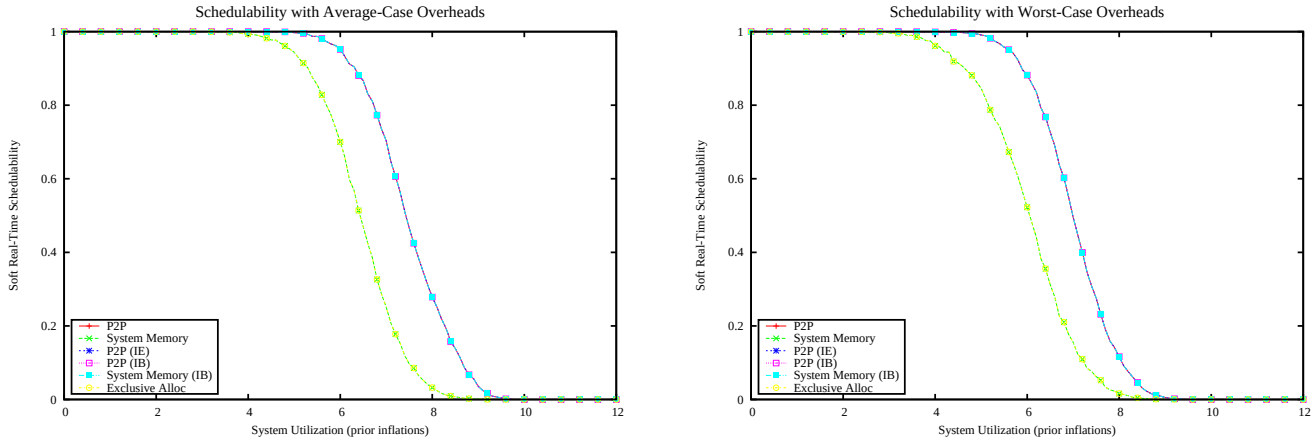

Figure 1911: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

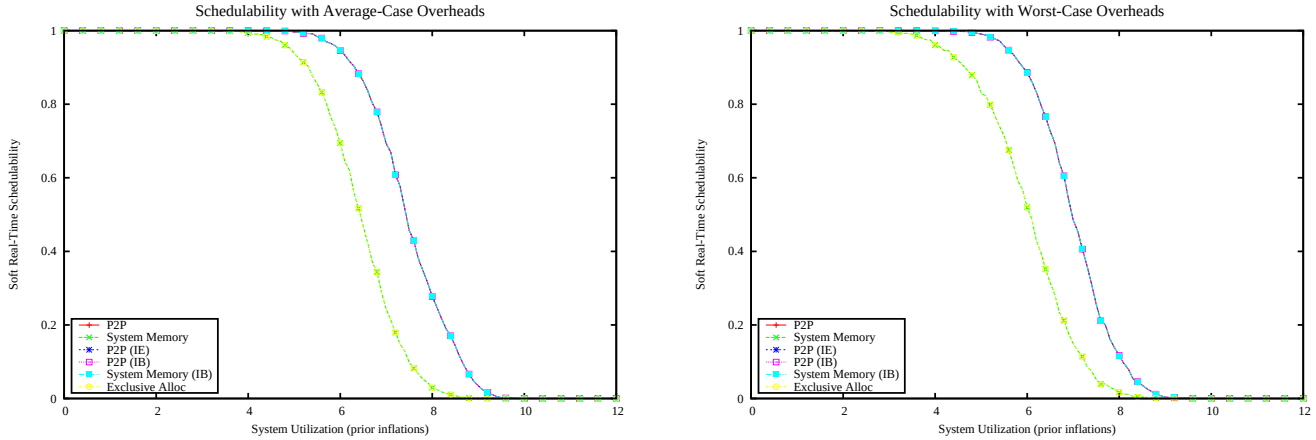

Figure 1912: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

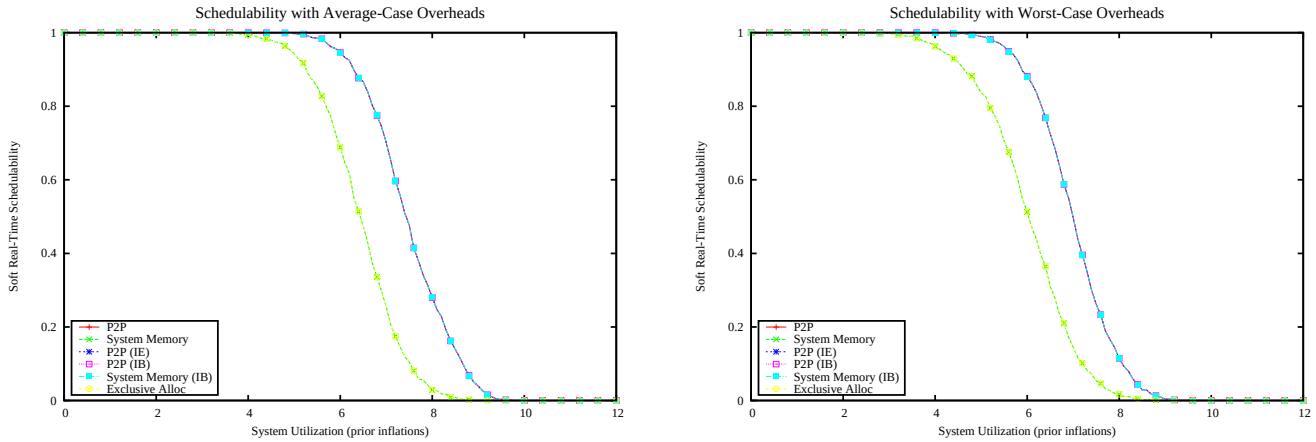

Figure 1913: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

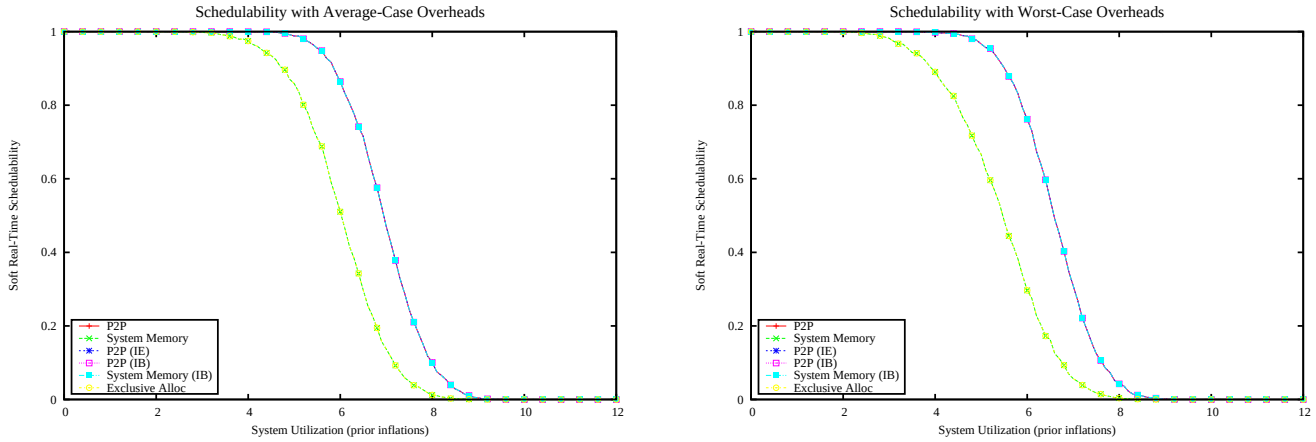

Figure 1914: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

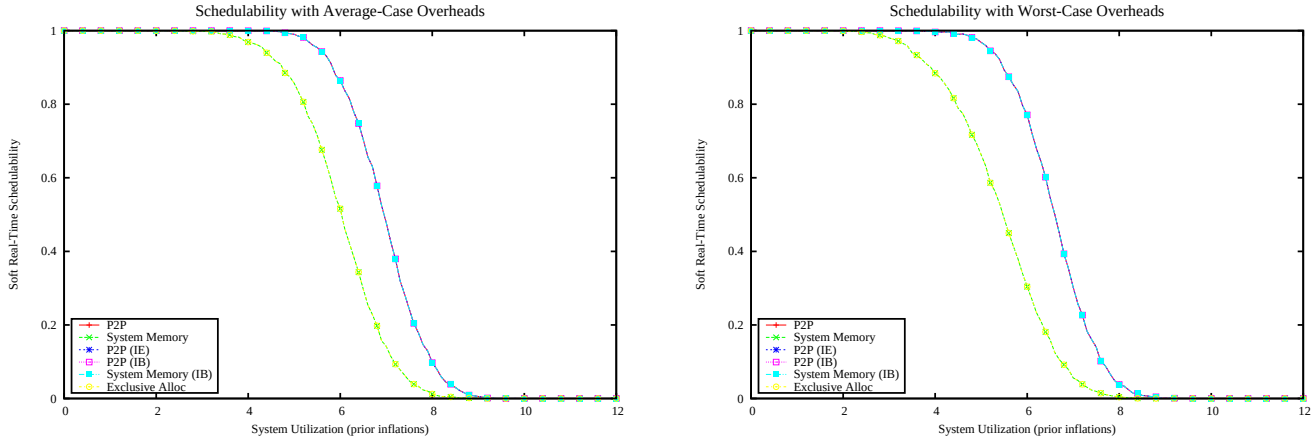

Figure 1915: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

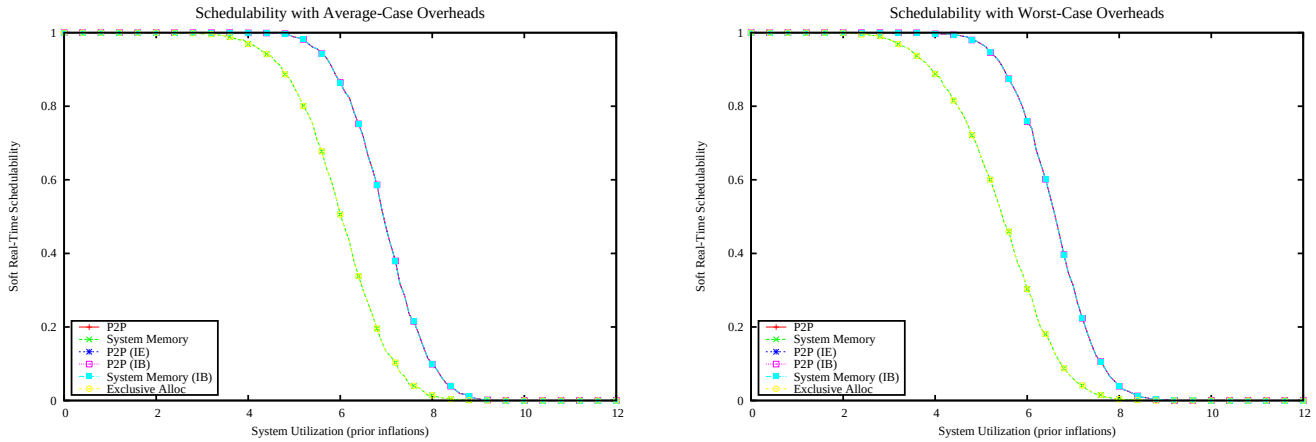

Figure 1916: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

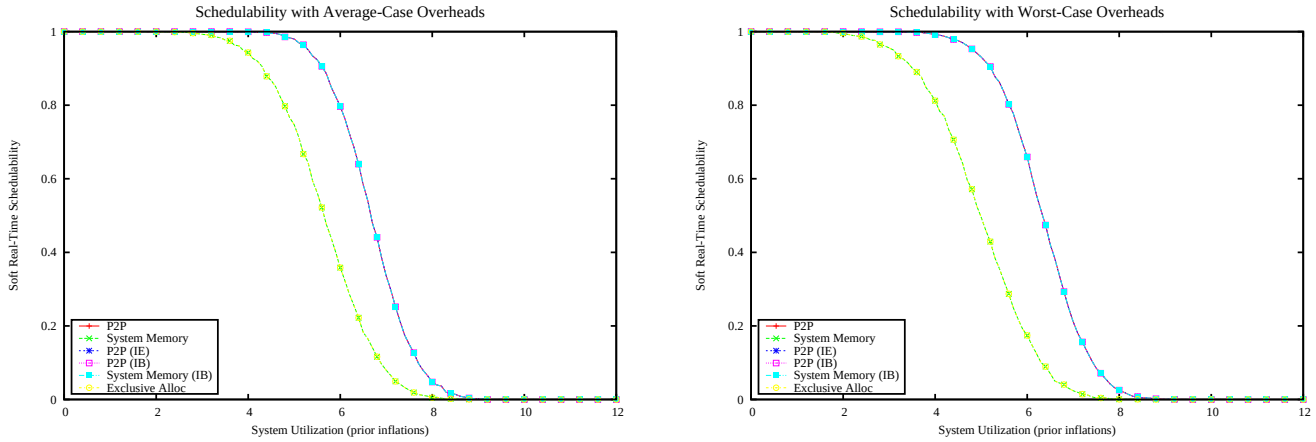

Figure 1917: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

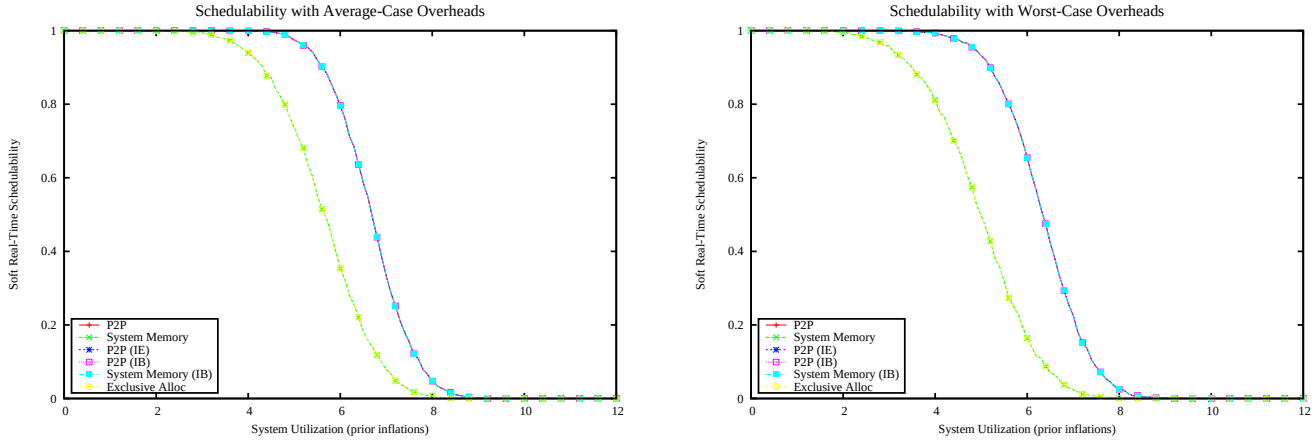

Figure 1918: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

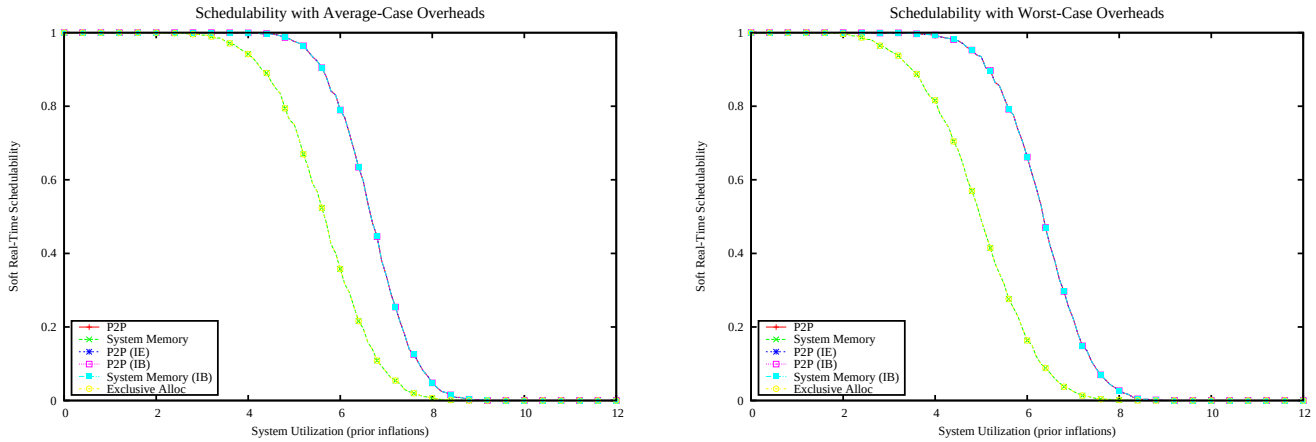

Figure 1919: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

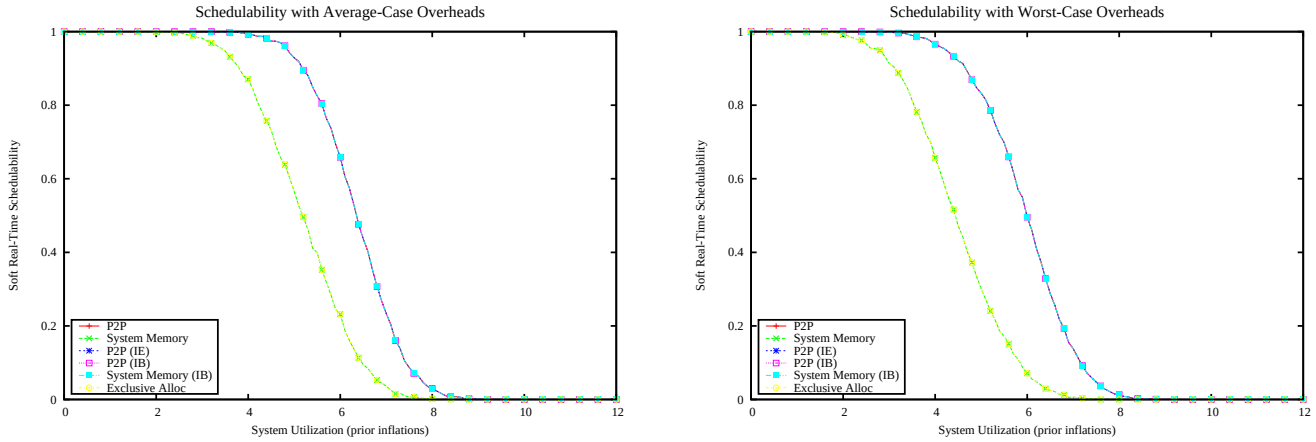

Figure 1920: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

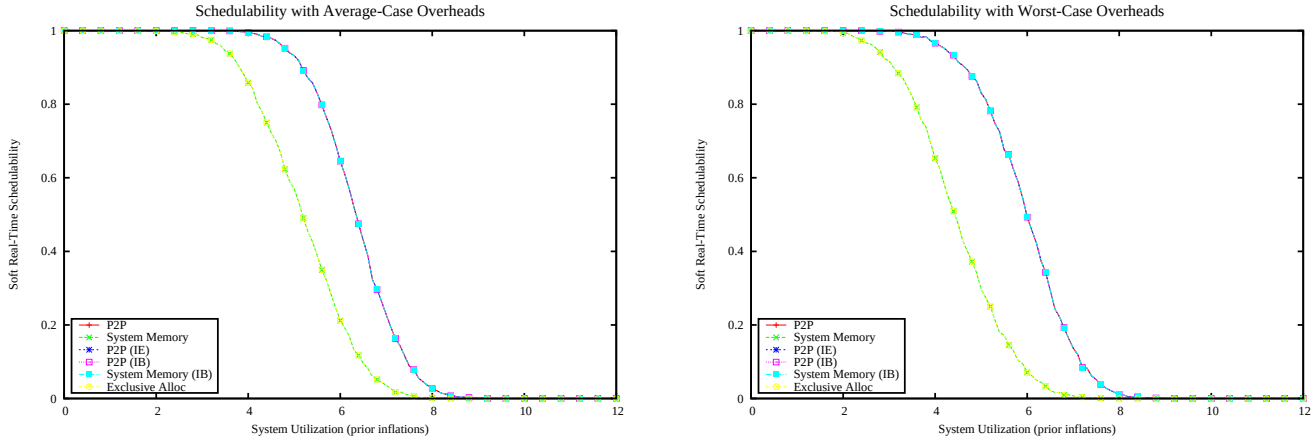

Figure 1921: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

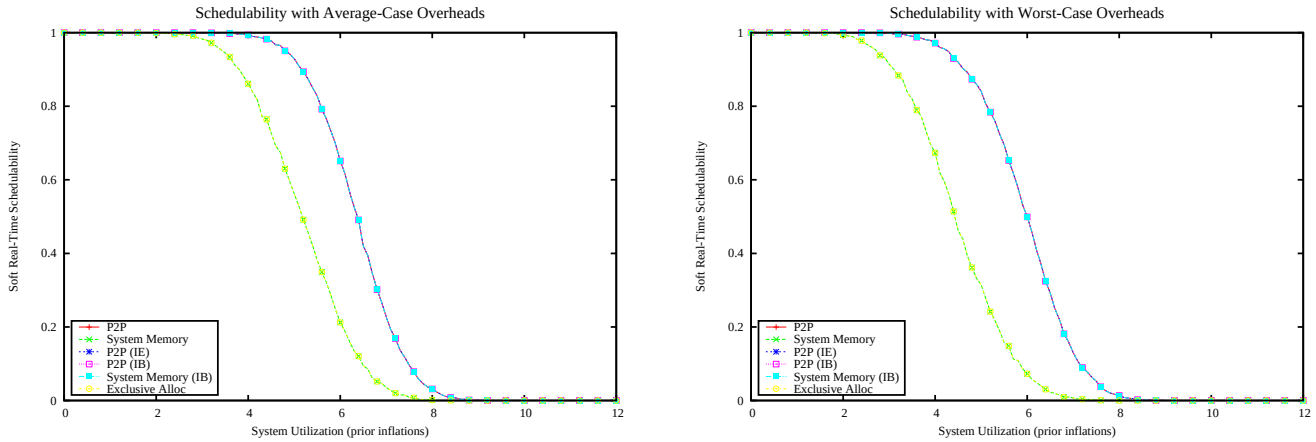

Figure 1922: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

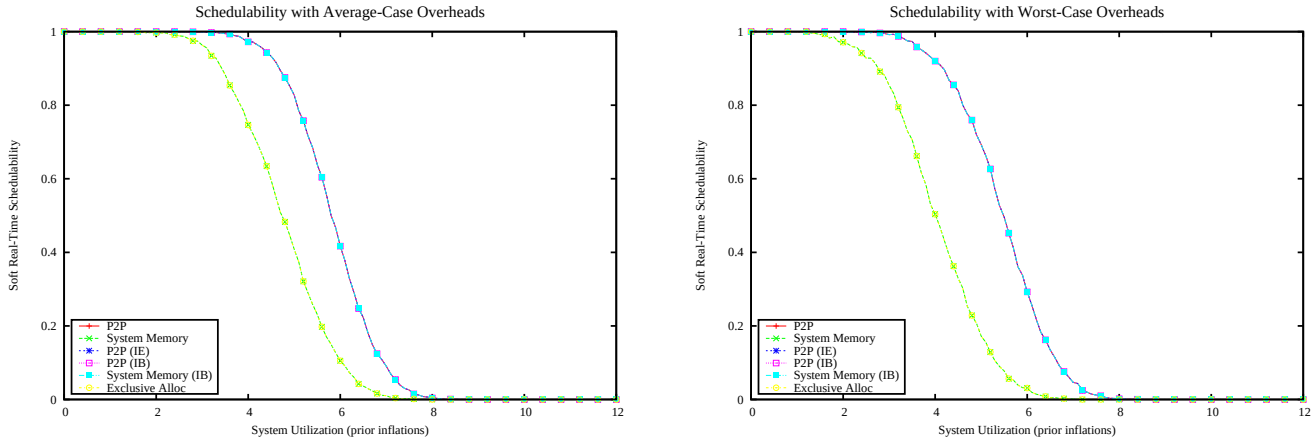

Figure 1923: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

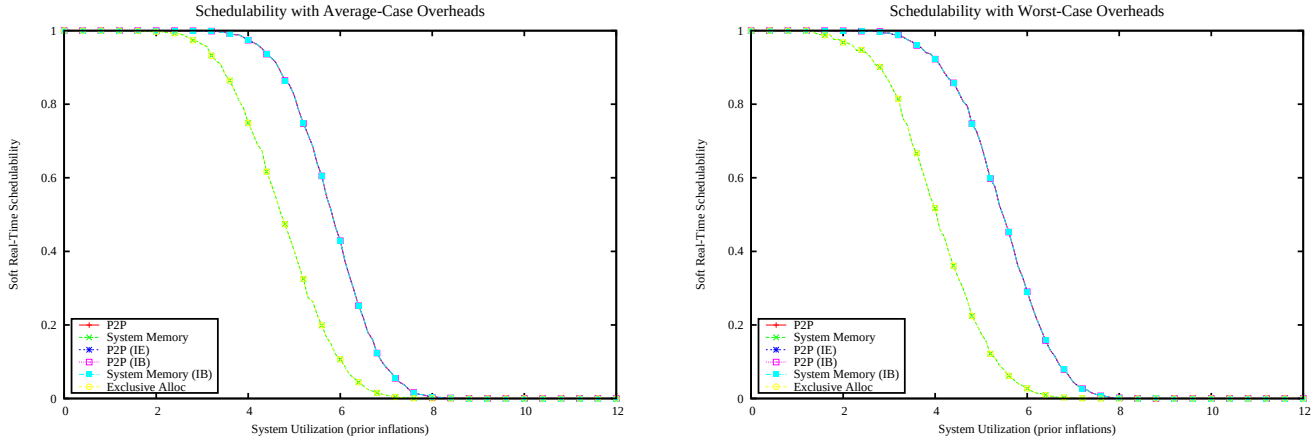

Figure 1924: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

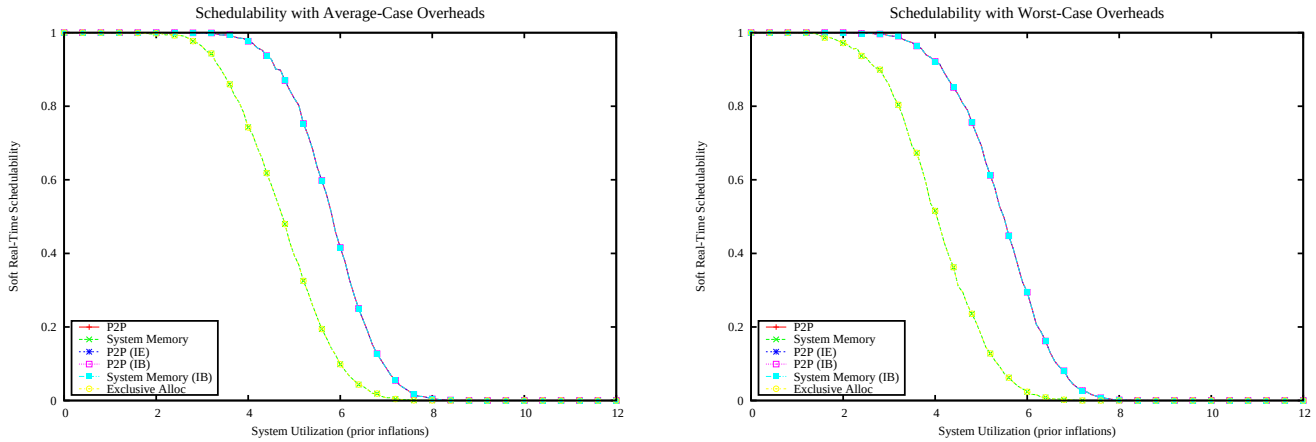

Figure 1925: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

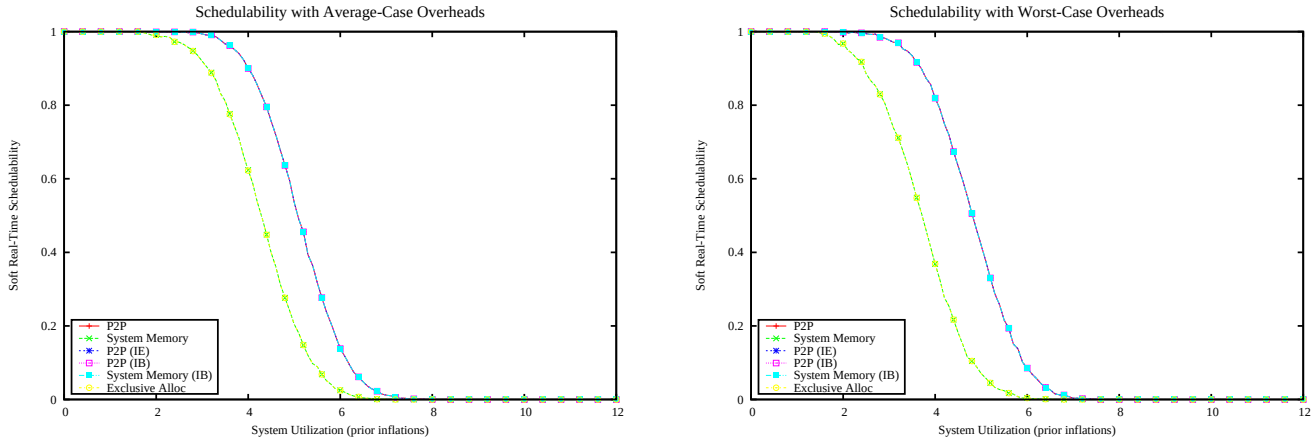

Figure 1926: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

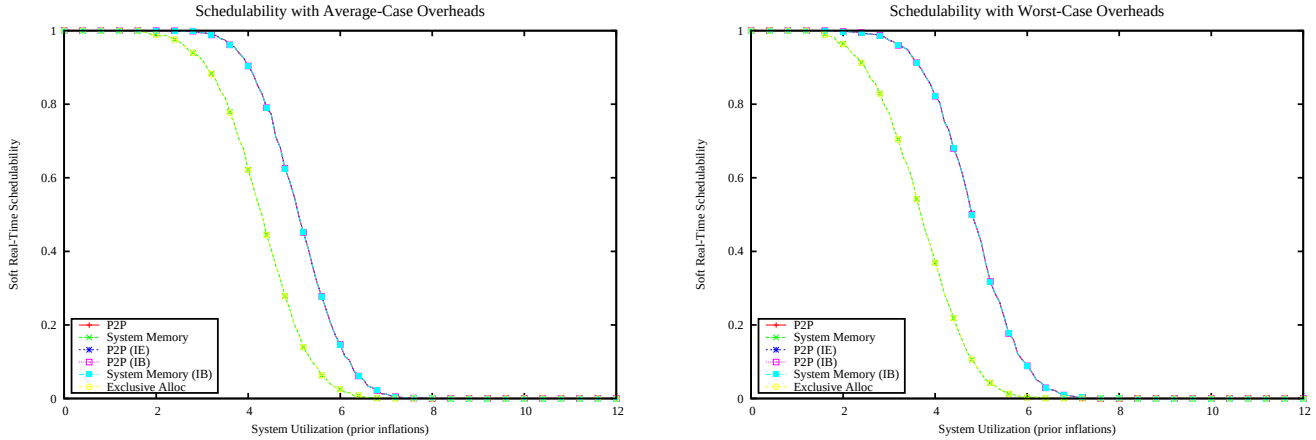

Figure 1927: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

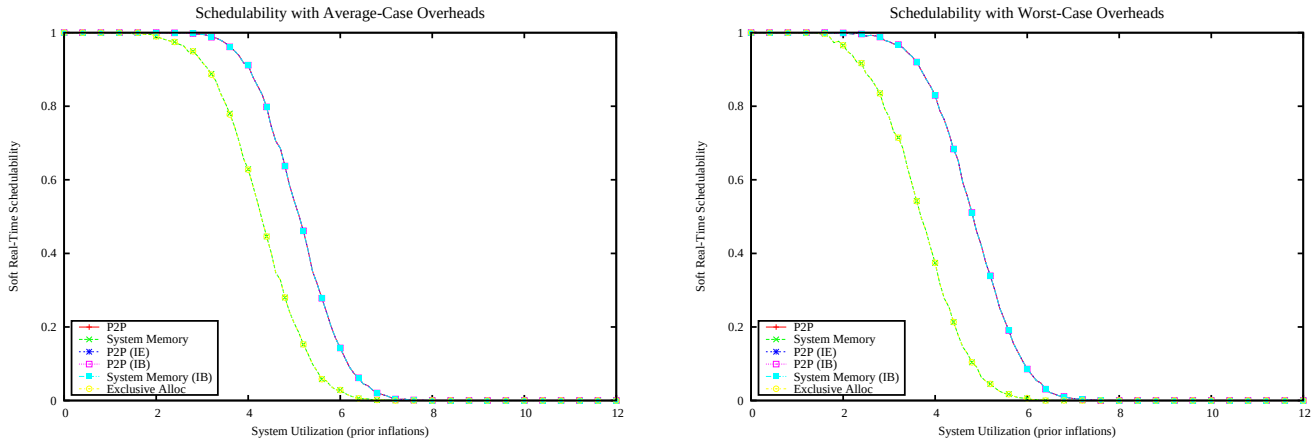

Figure 1928: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

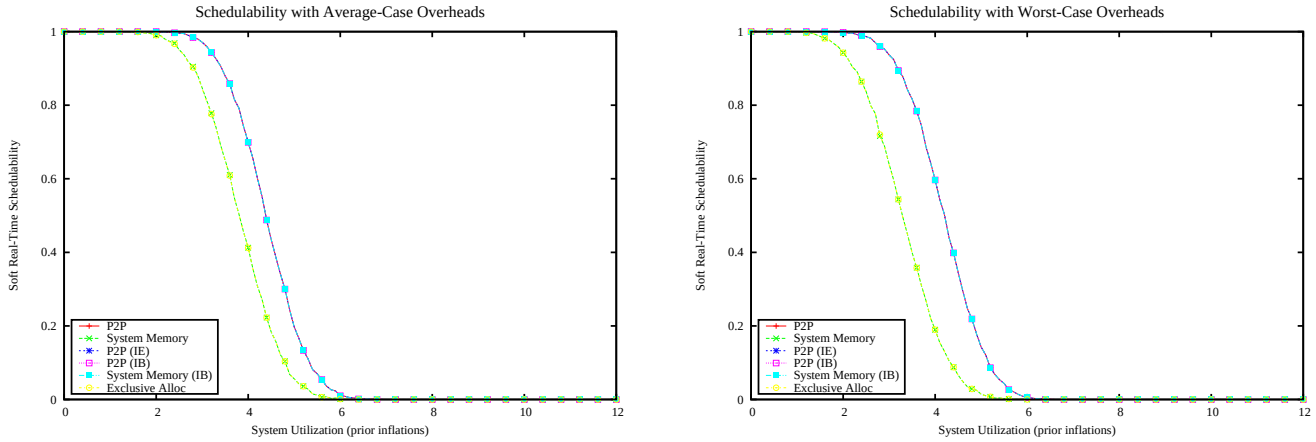

Figure 1929: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

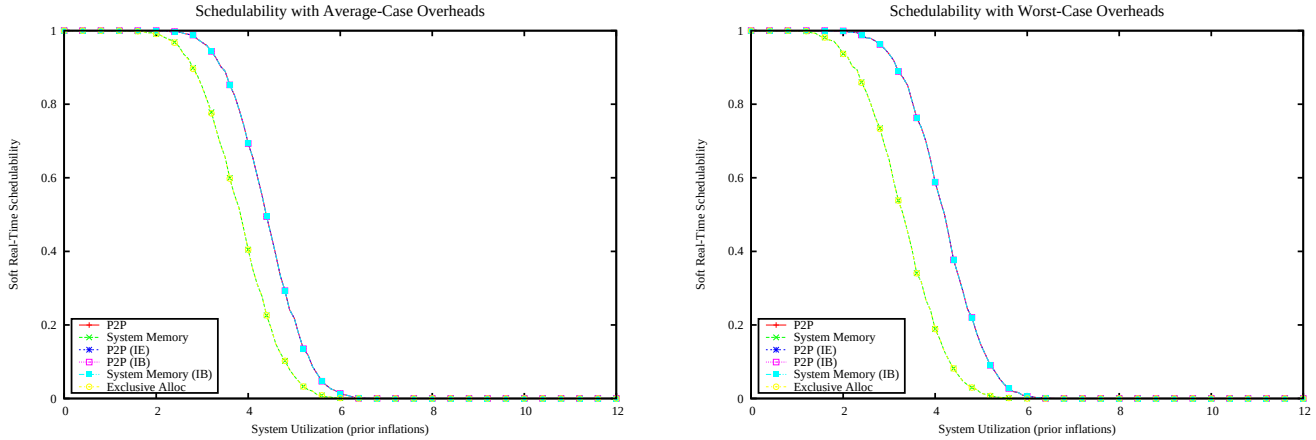

Figure 1930: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

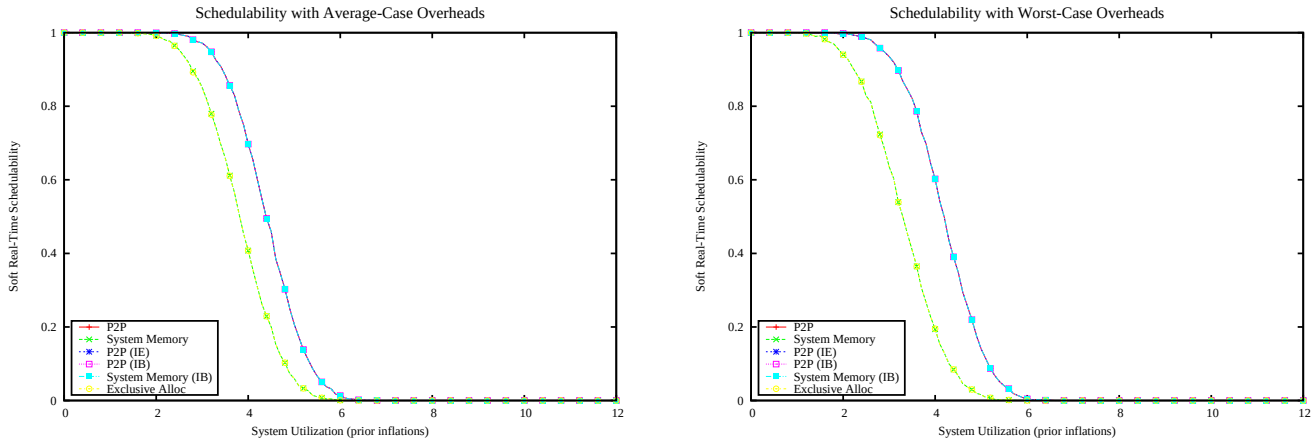

Figure 1931: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

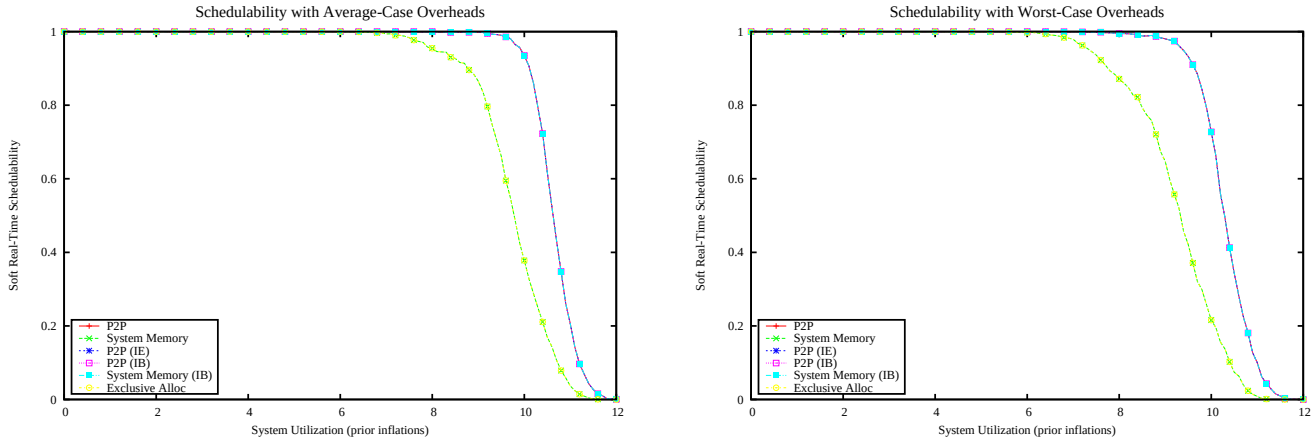

Figure 1932: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

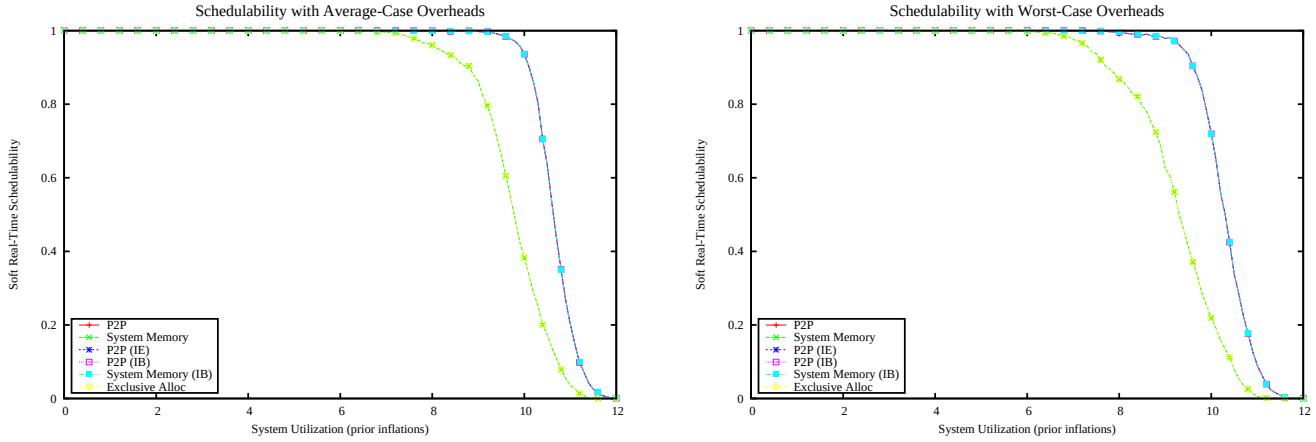

Figure 1933: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

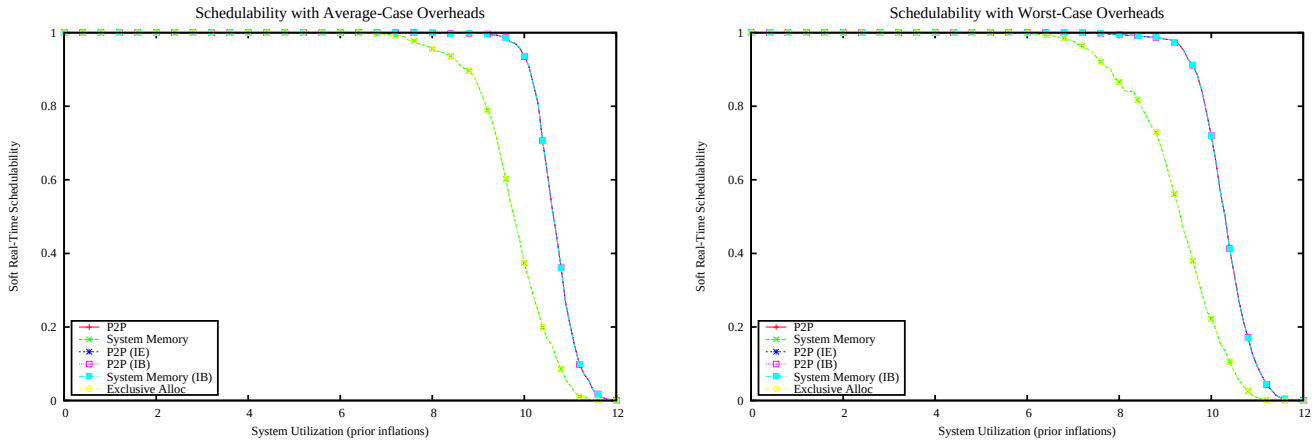

Figure 1934: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

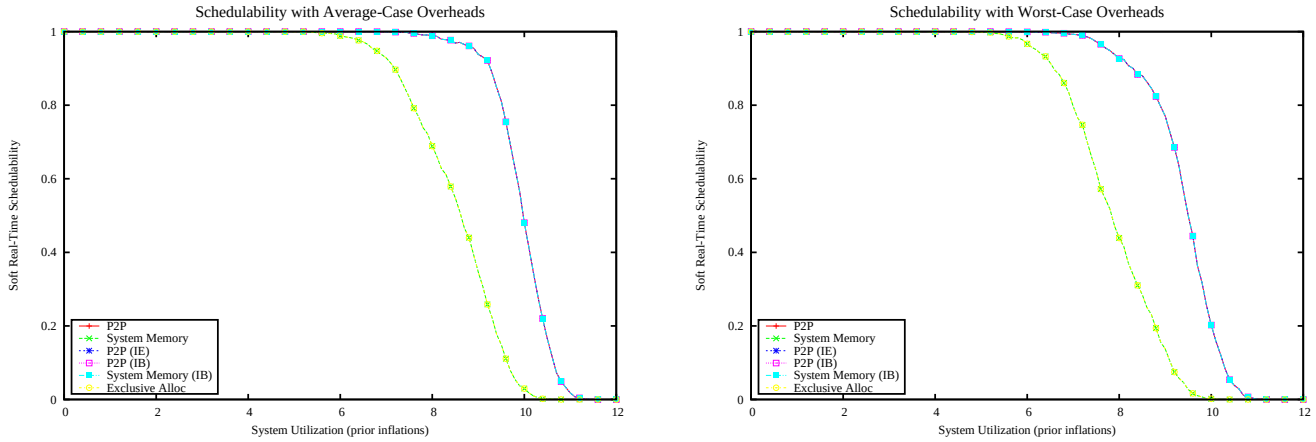

Figure 1935: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

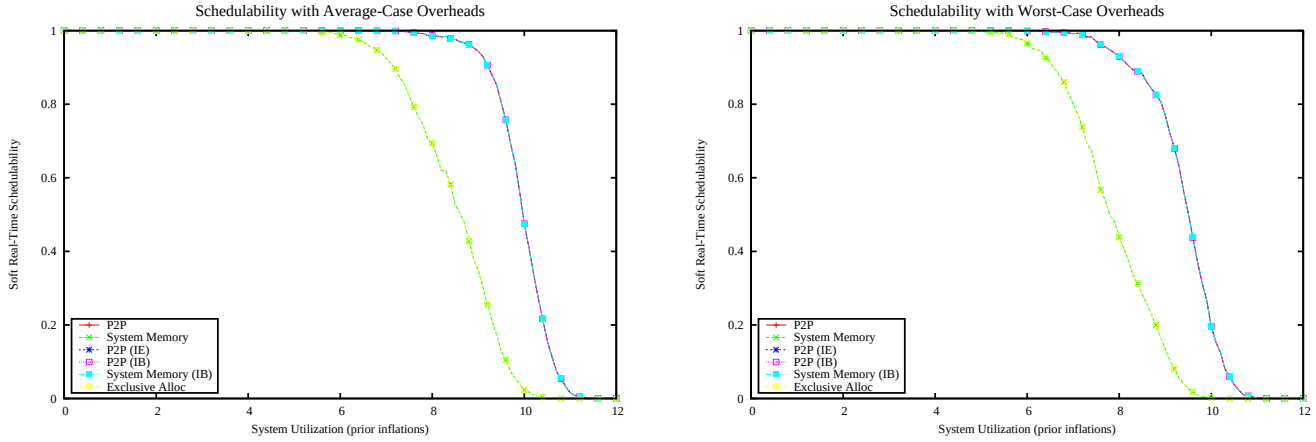

Figure 1936: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

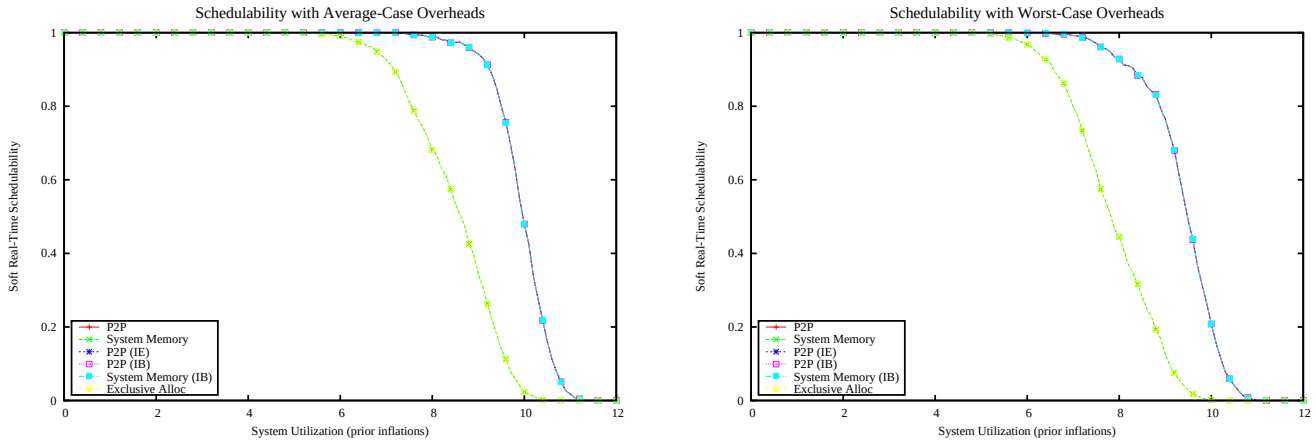

Figure 1937: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

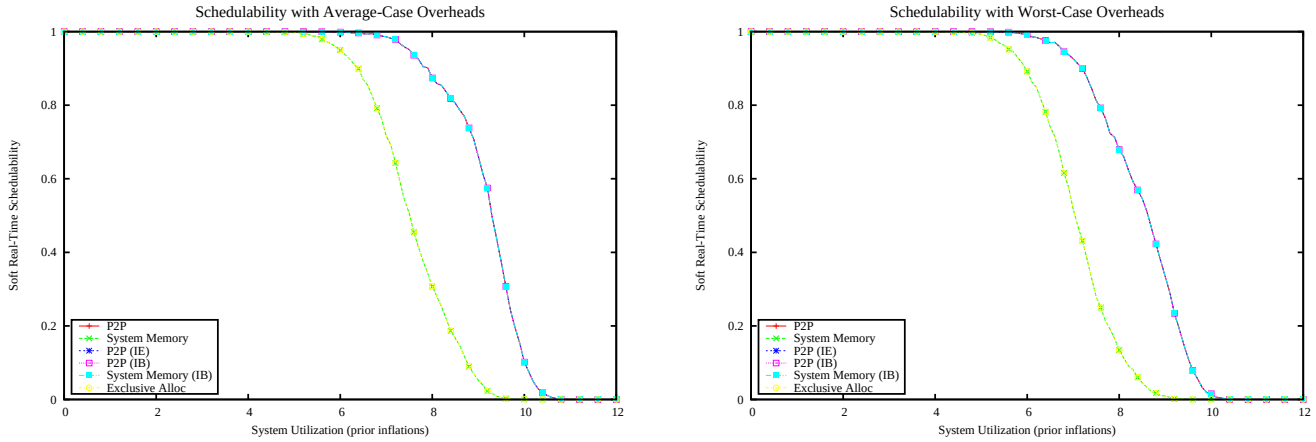

Figure 1938: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

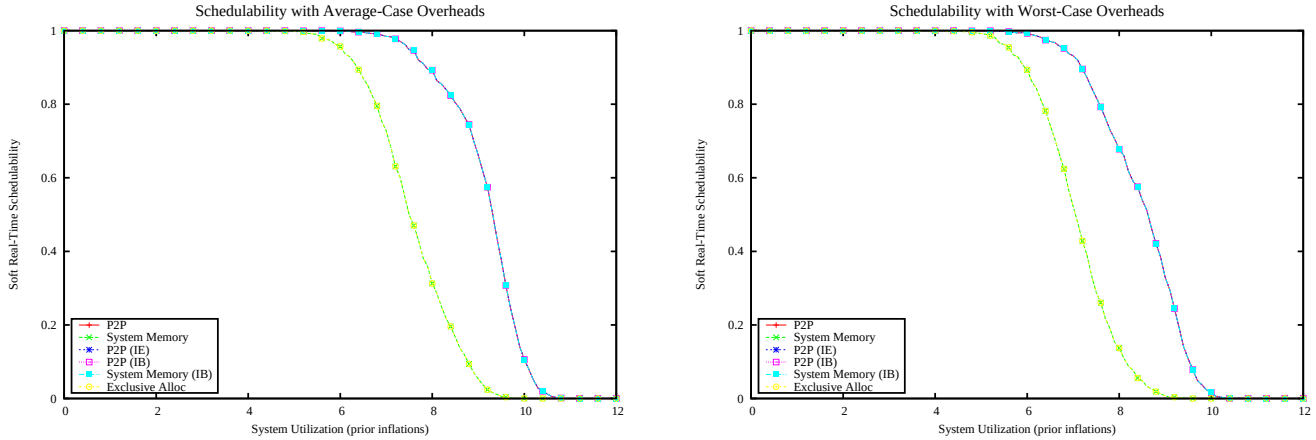

Figure 1939: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

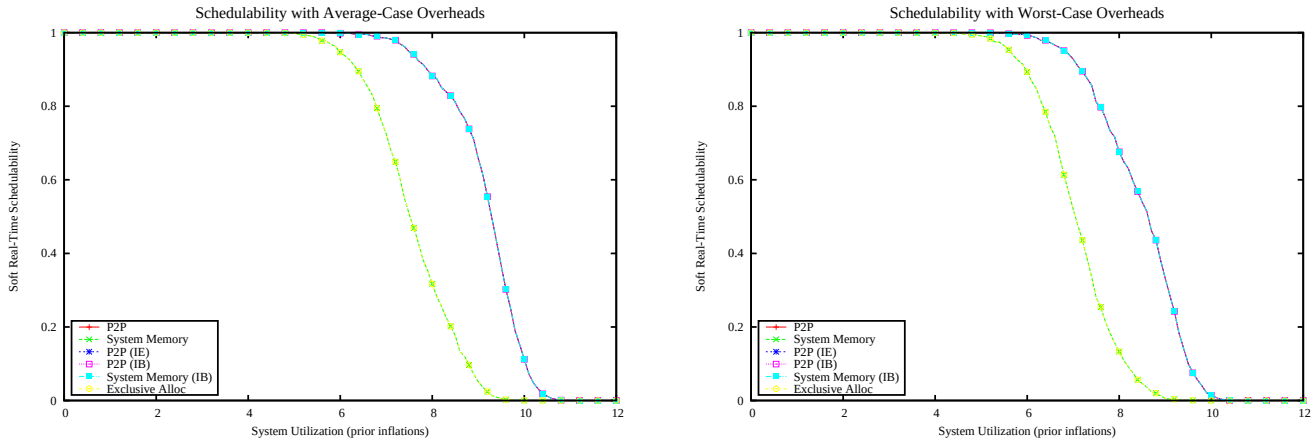

Figure 1940: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

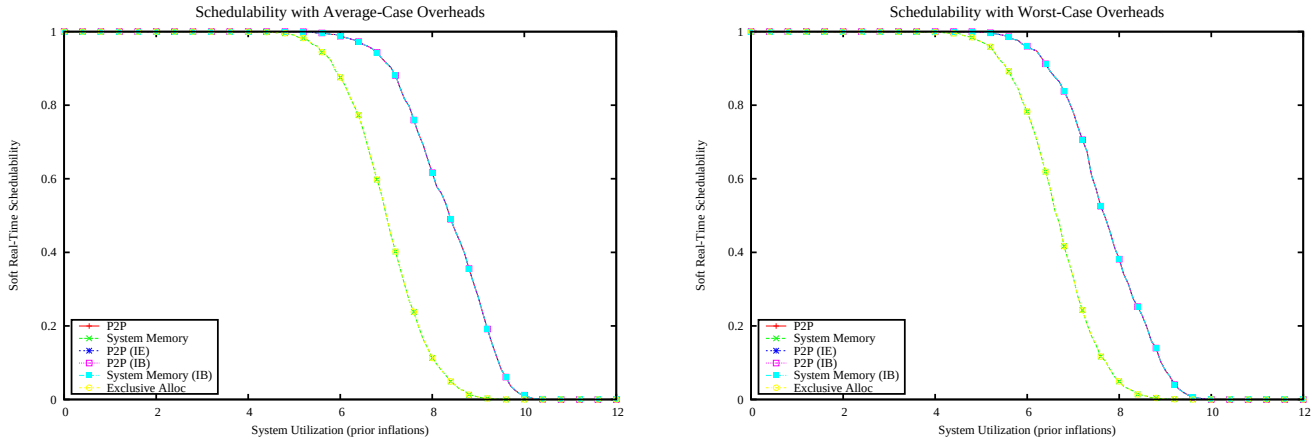

Figure 1941: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

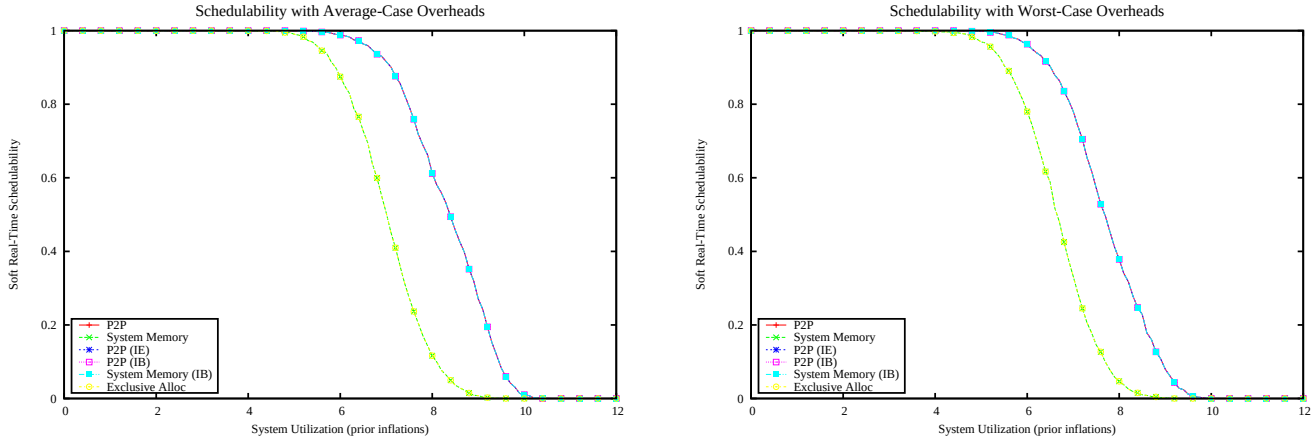

Figure 1942: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

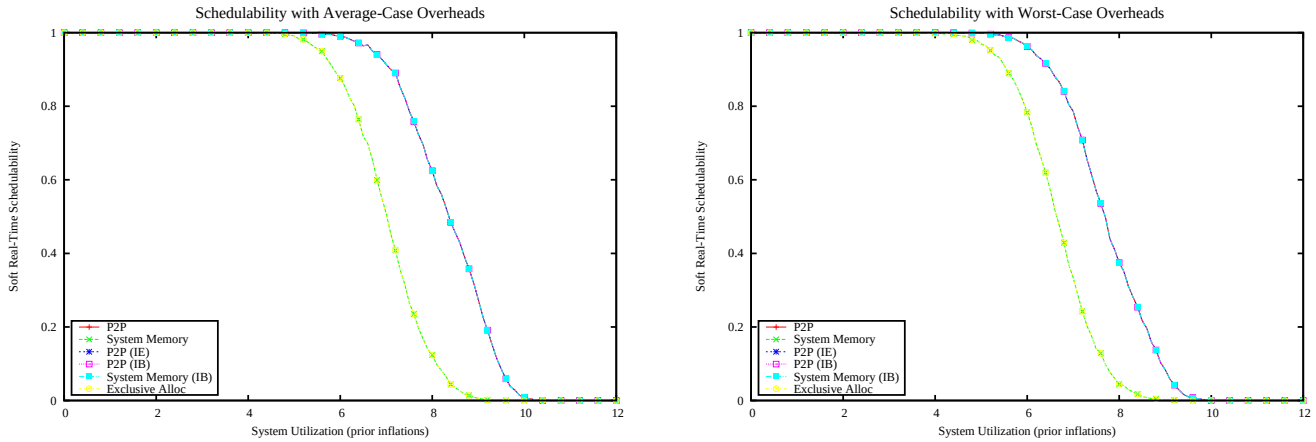

Figure 1943: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

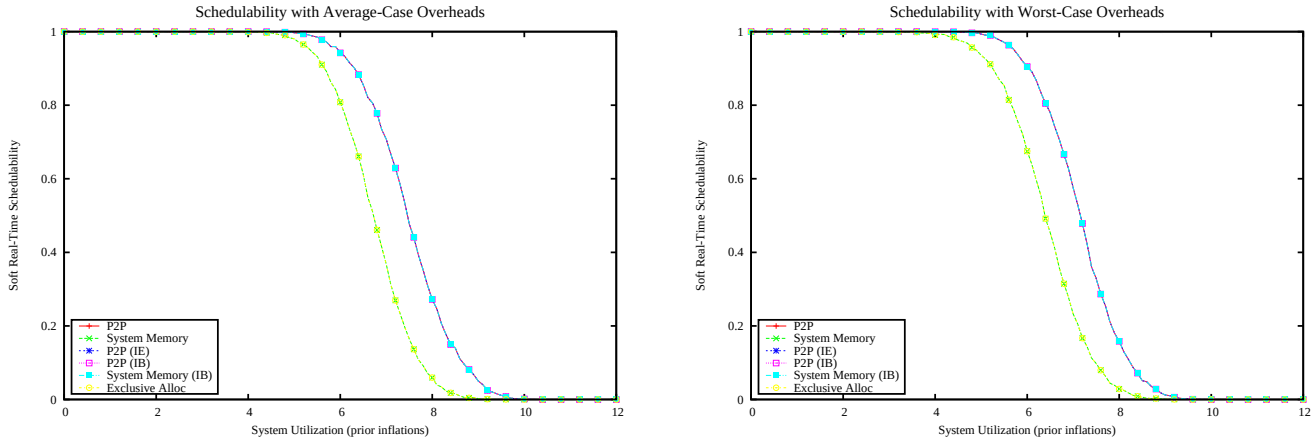

Figure 1944: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

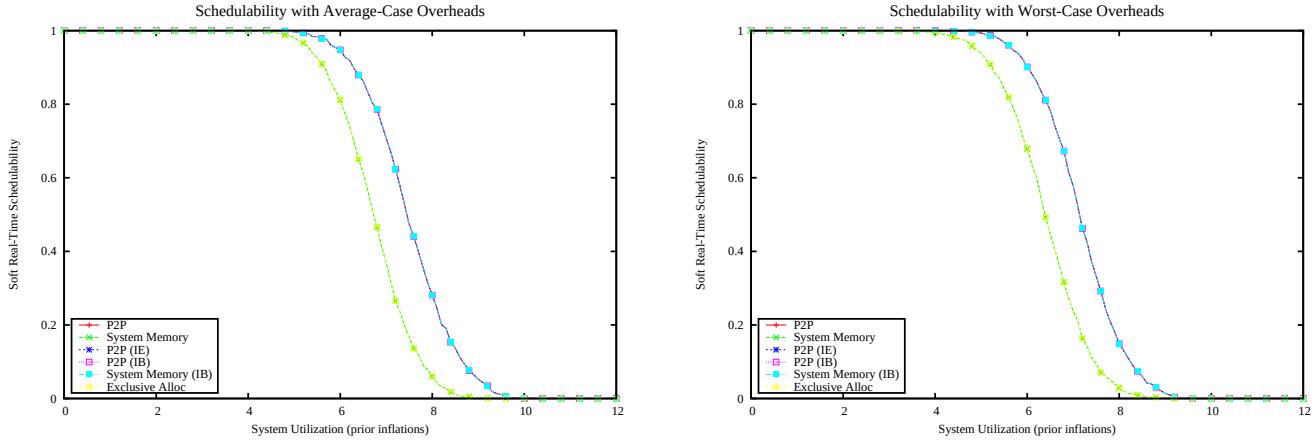

Figure 1945: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

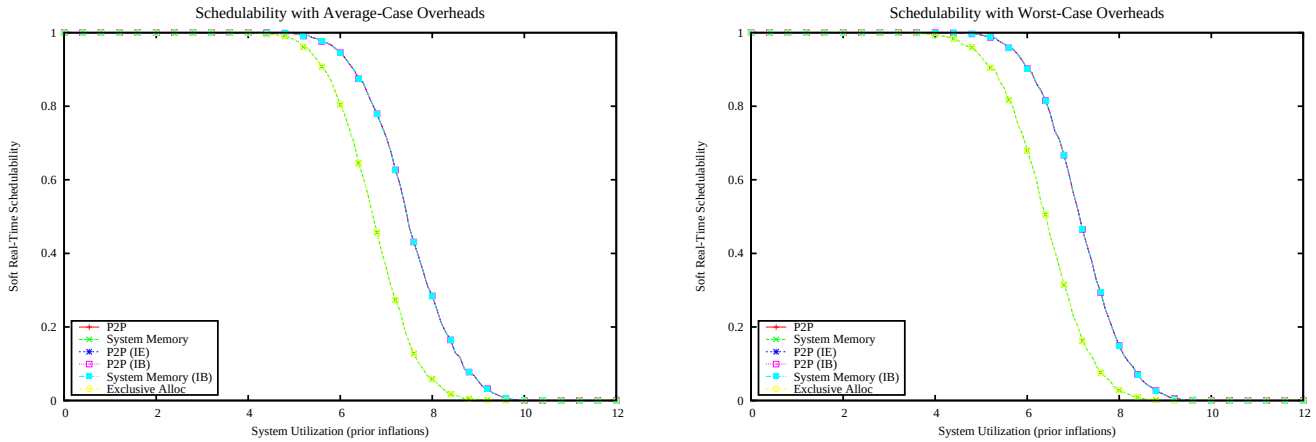

Figure 1946: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

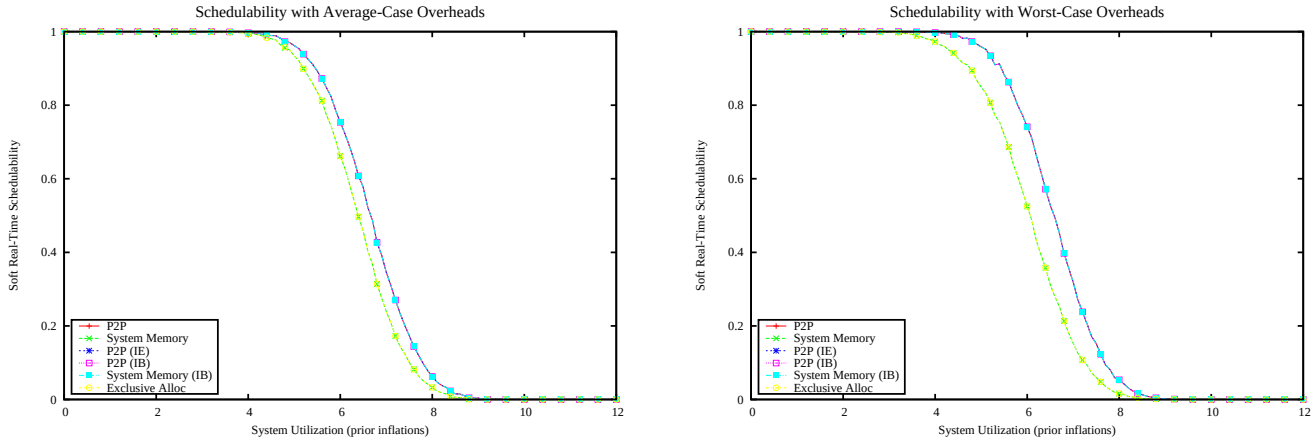

Figure 1947: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

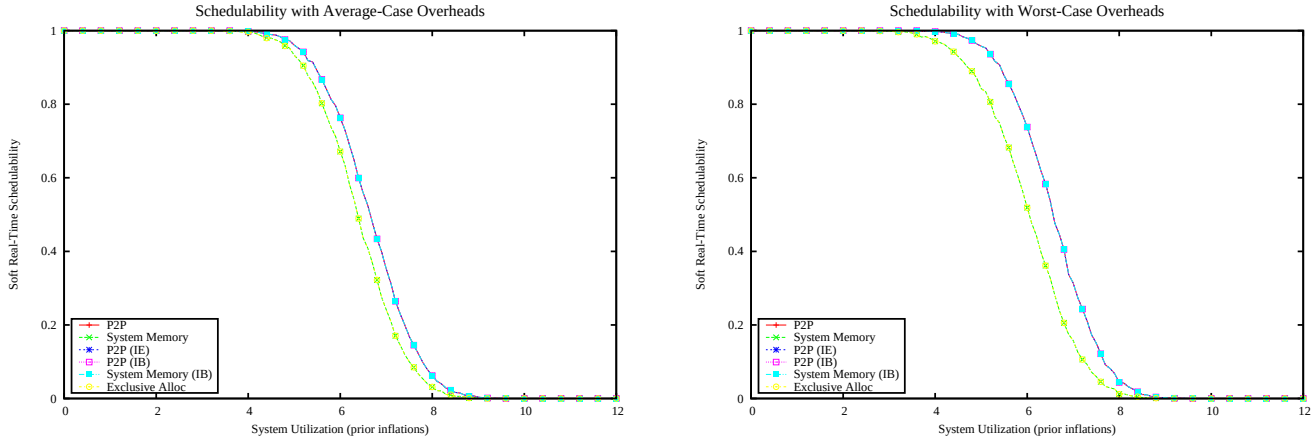

Figure 1948: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

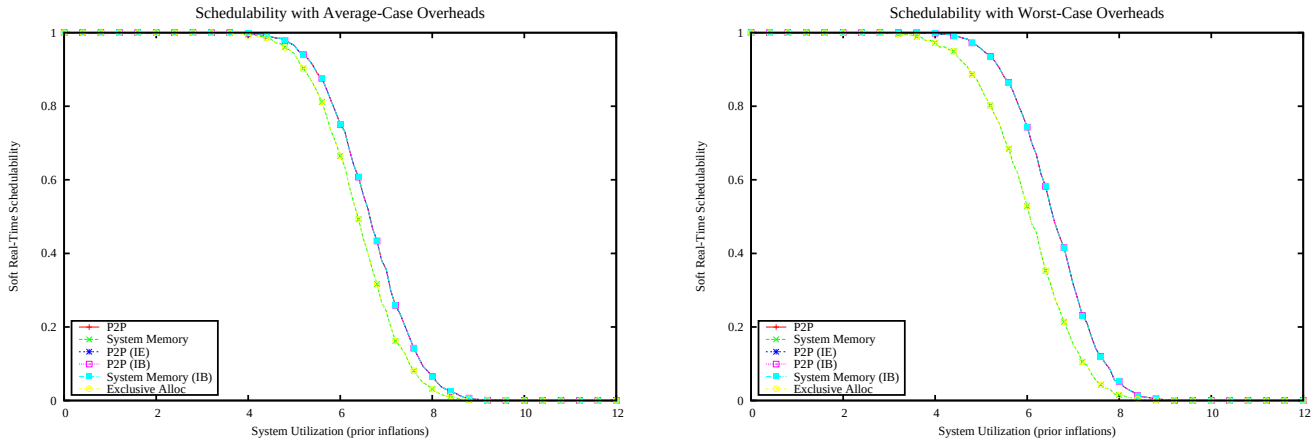

Figure 1949: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

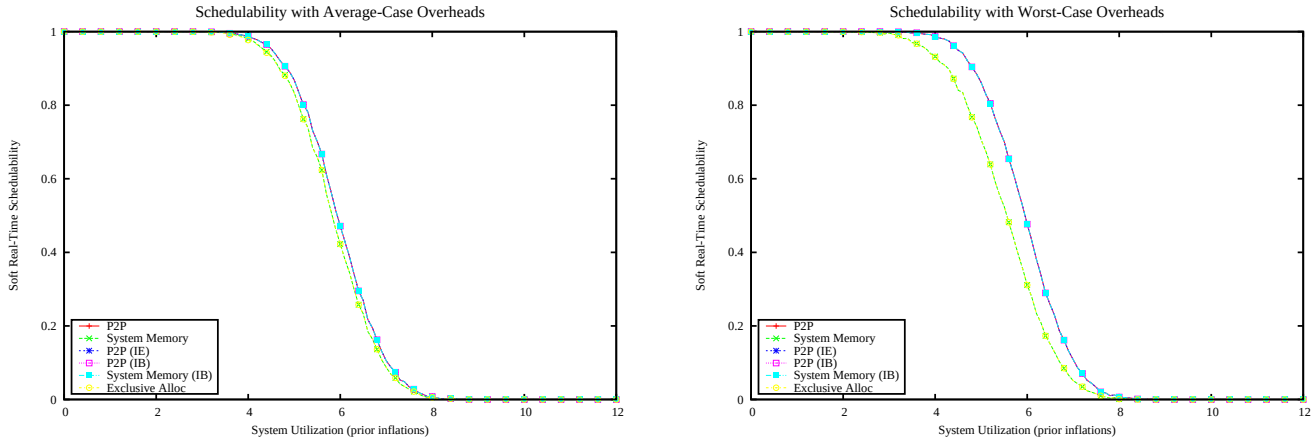

Figure 1950: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

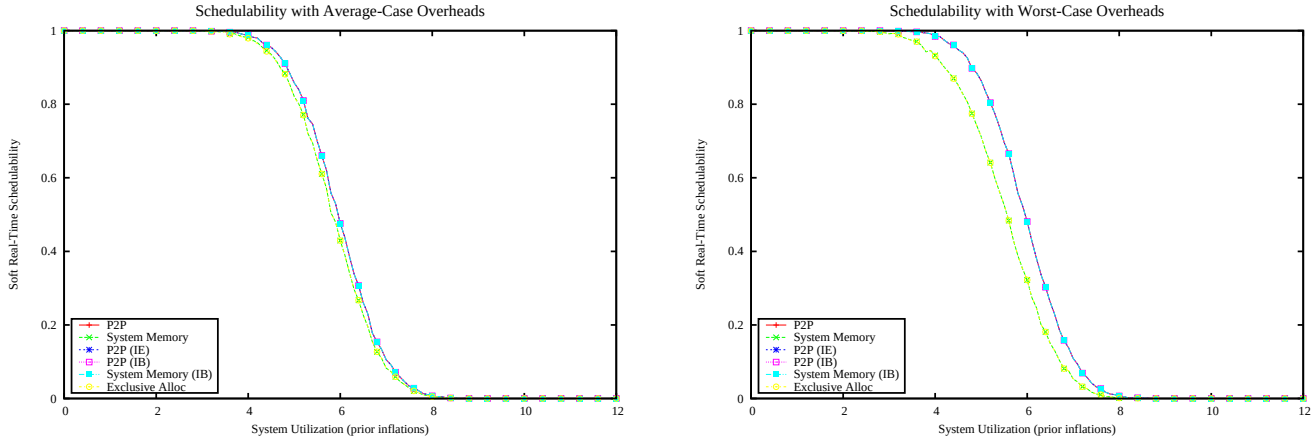

Figure 1951: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

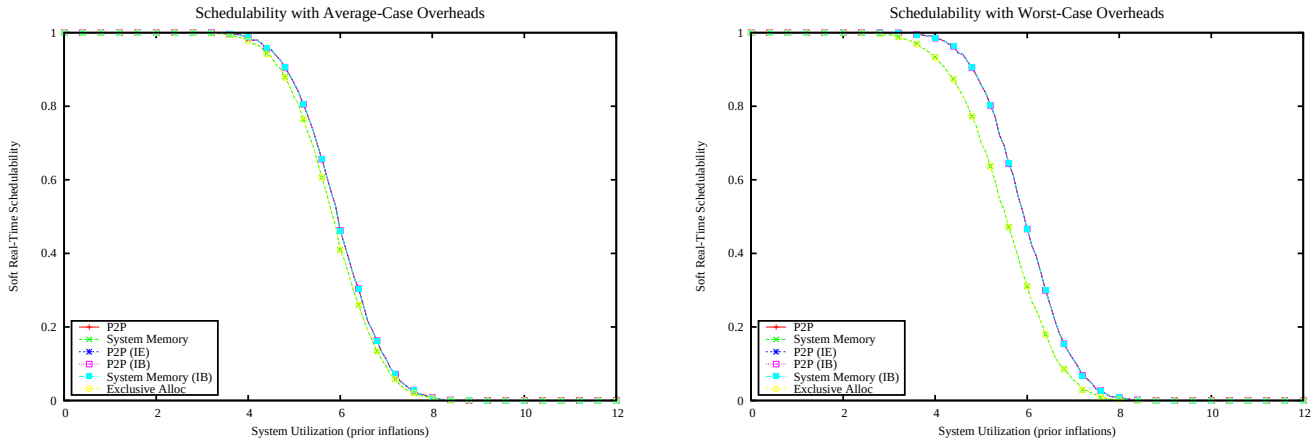

Figure 1952: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

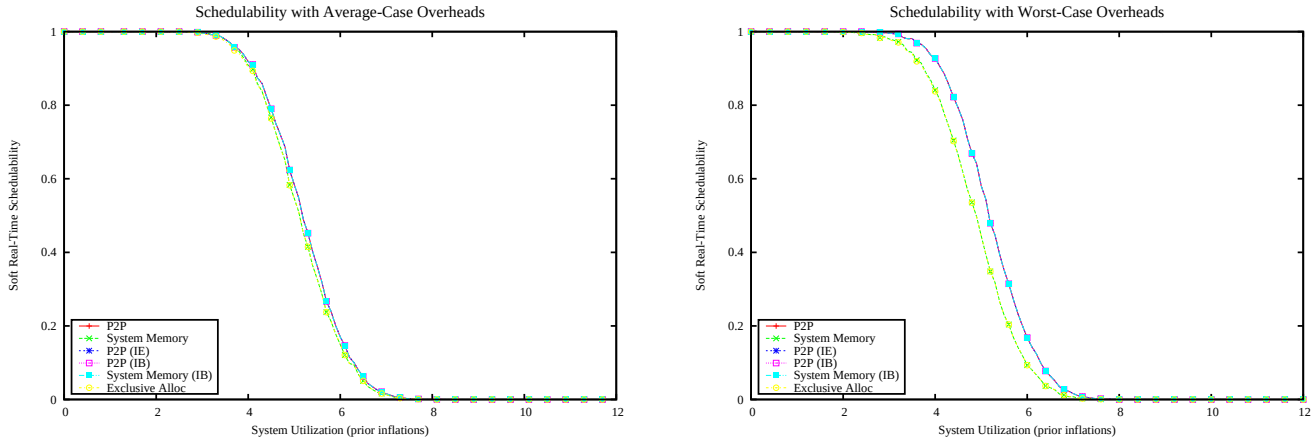

Figure 1953: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

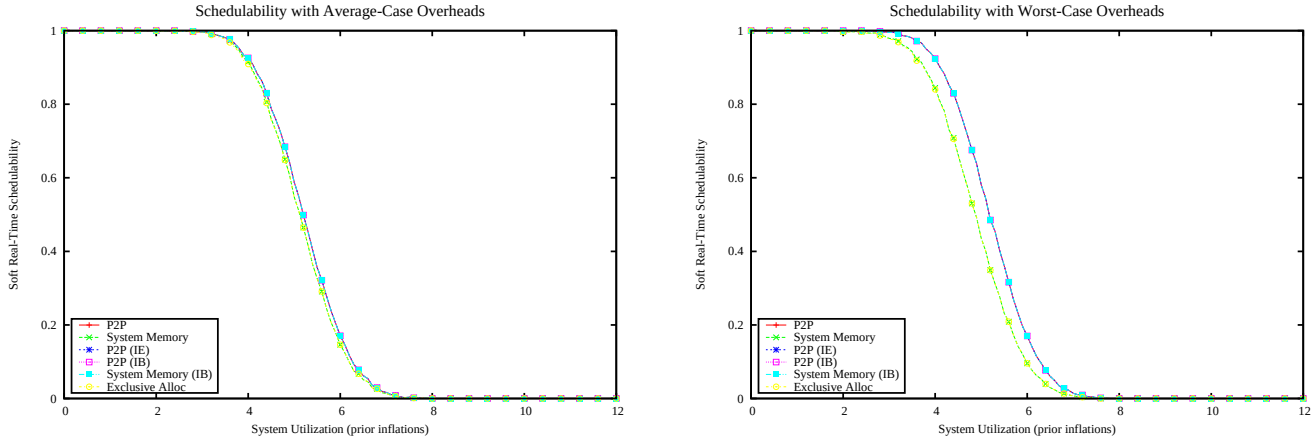

Figure 1954: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

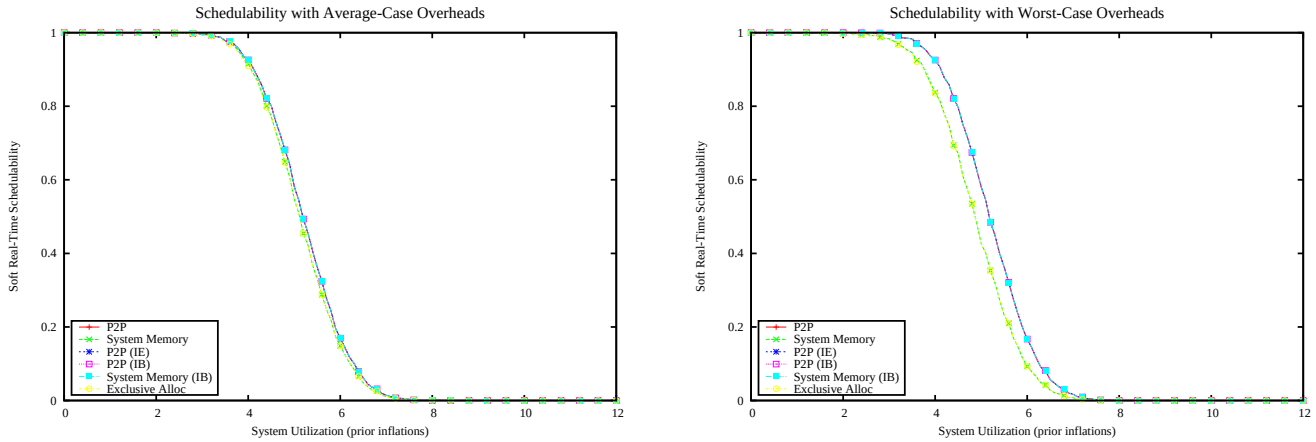

Figure 1955: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

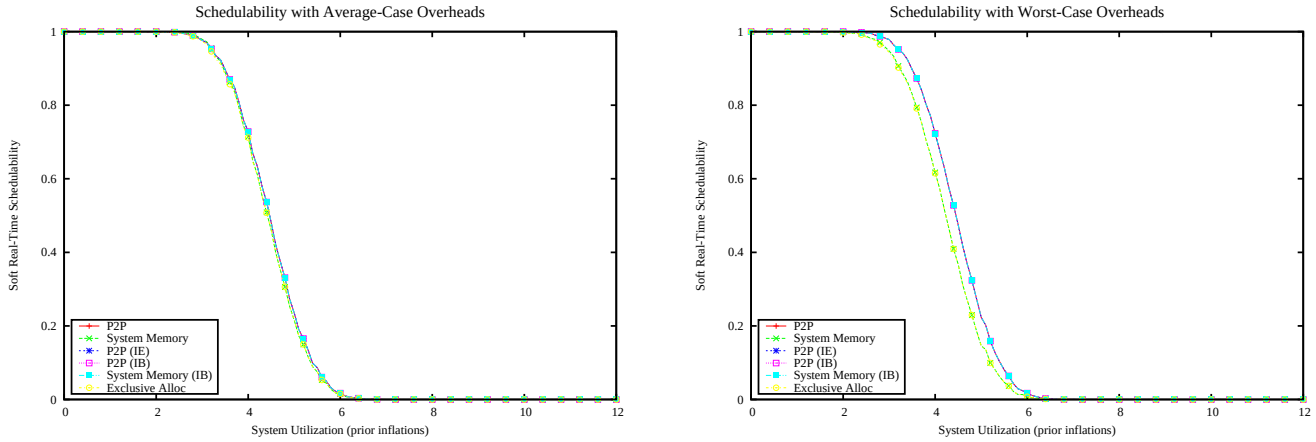

Figure 1956: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

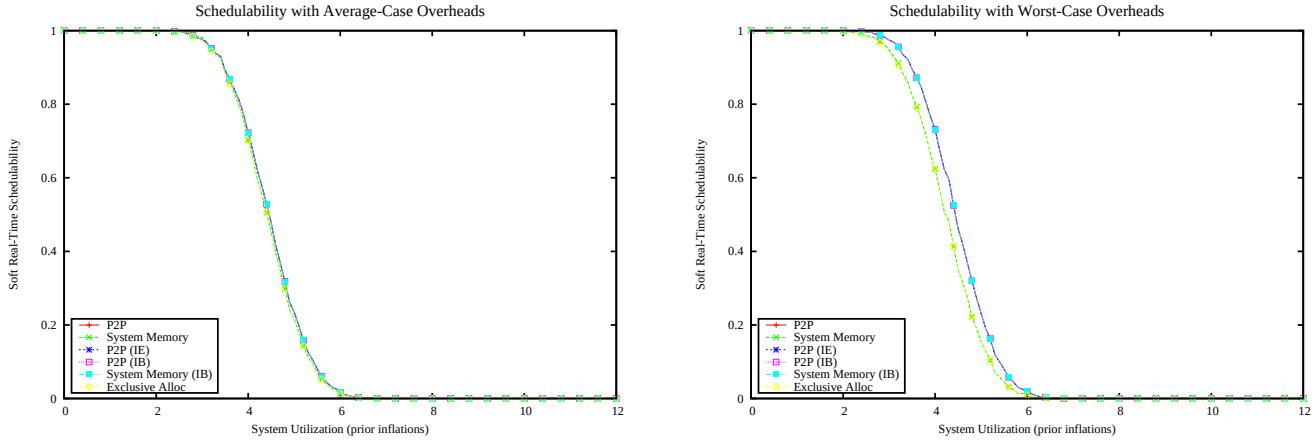

Figure 1957: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

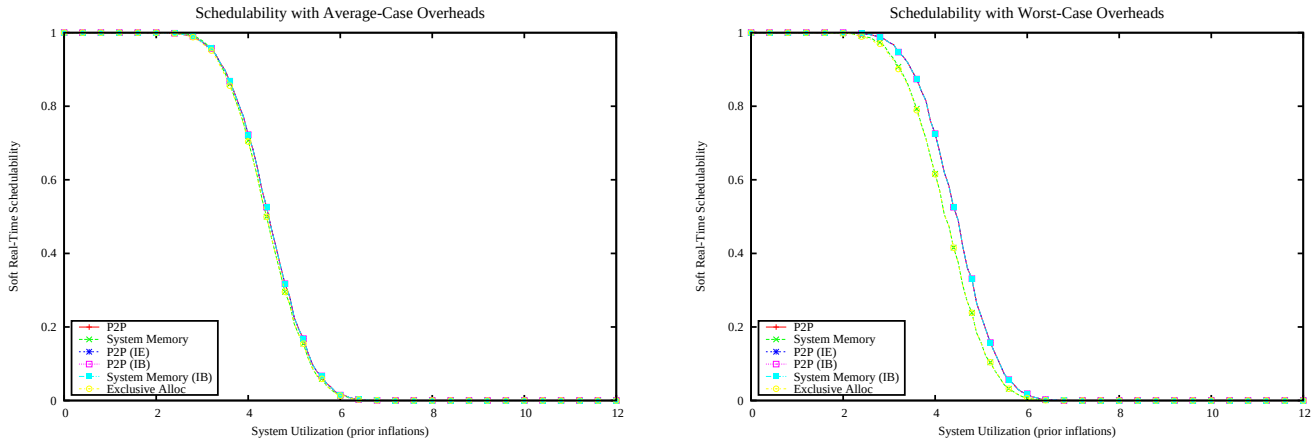

Figure 1958: 2x6 CPU Clusters, 2x4 GPU Clusters (Far P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

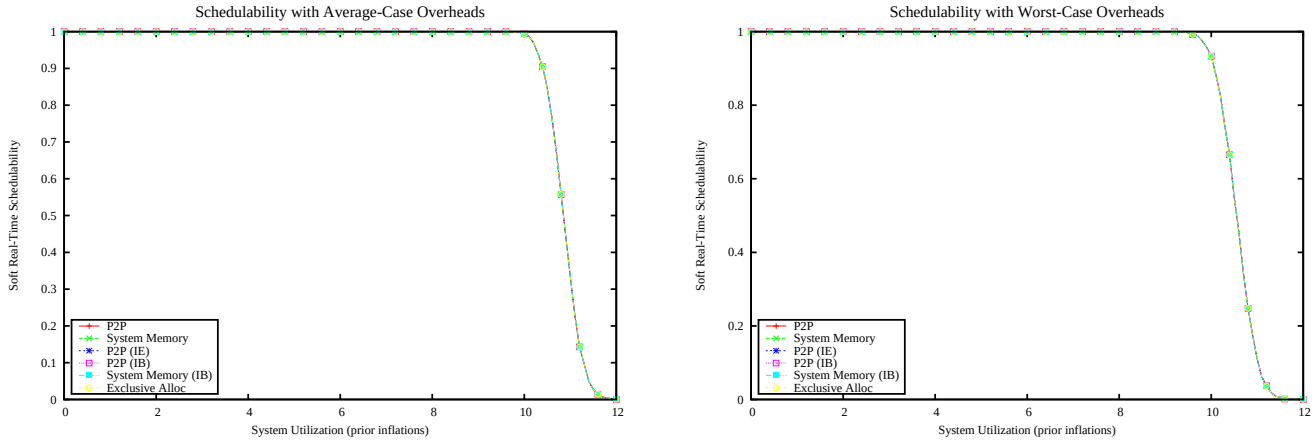

Figure 1959: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

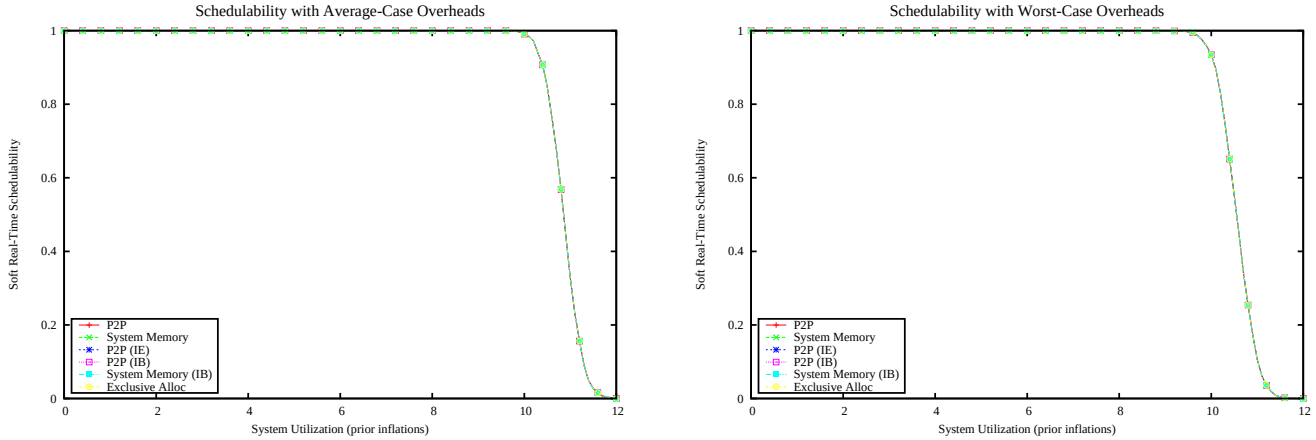

Figure 1960: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

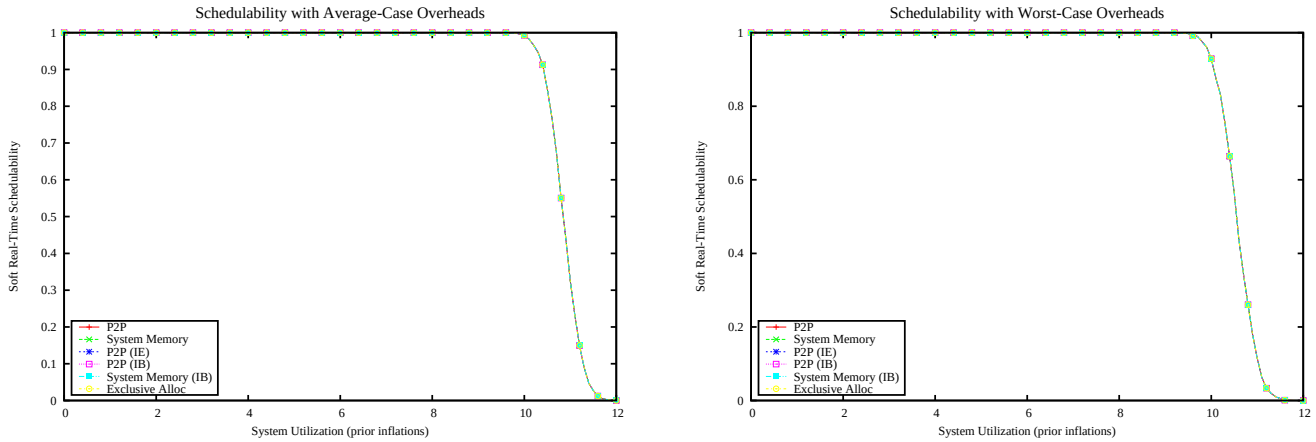

Figure 1961: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

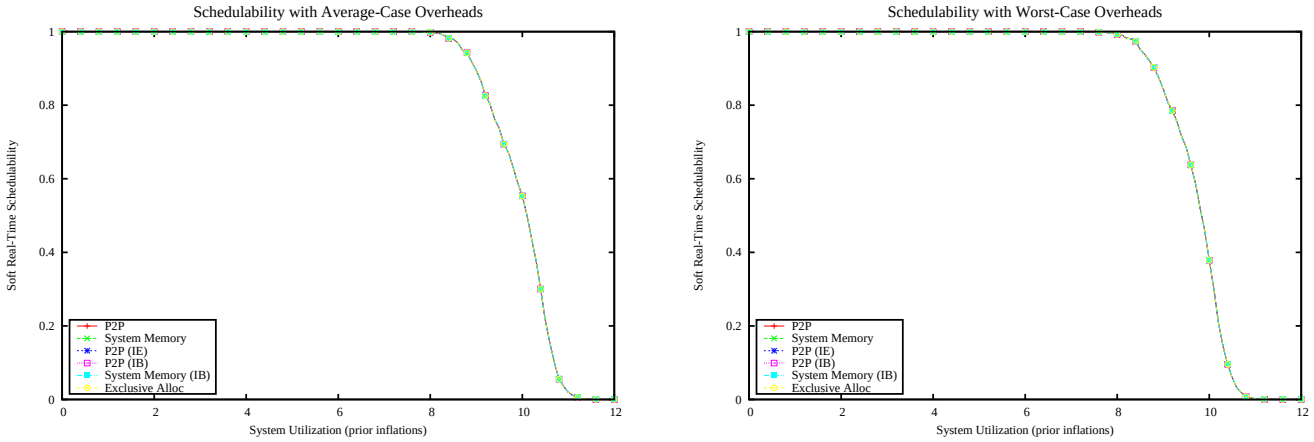

Figure 1962: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

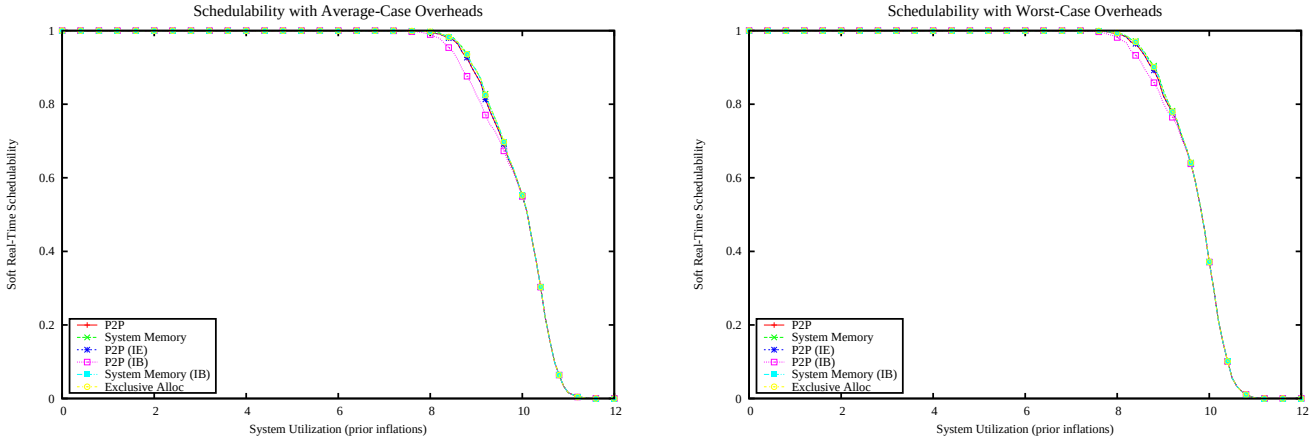

Figure 1963: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

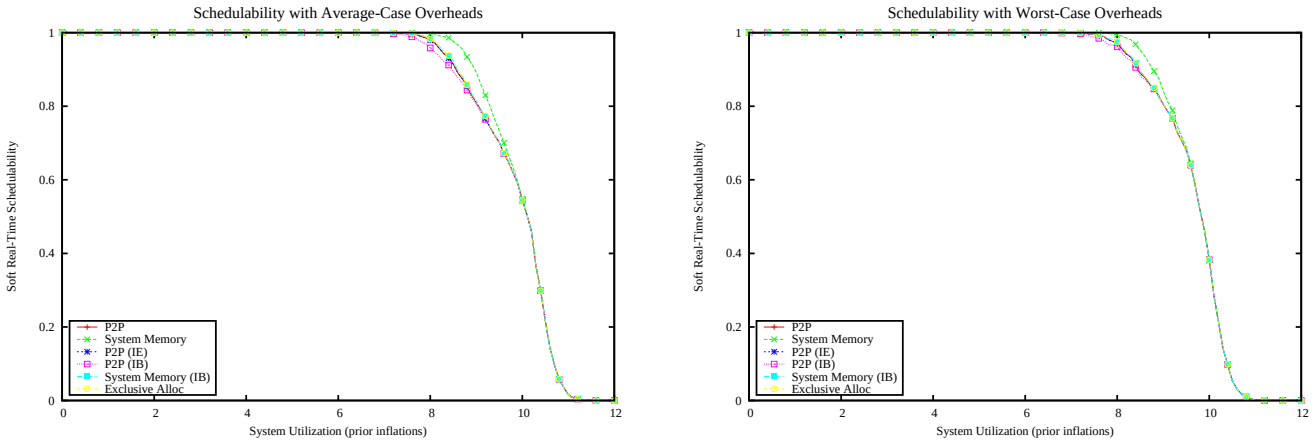

Figure 1964: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

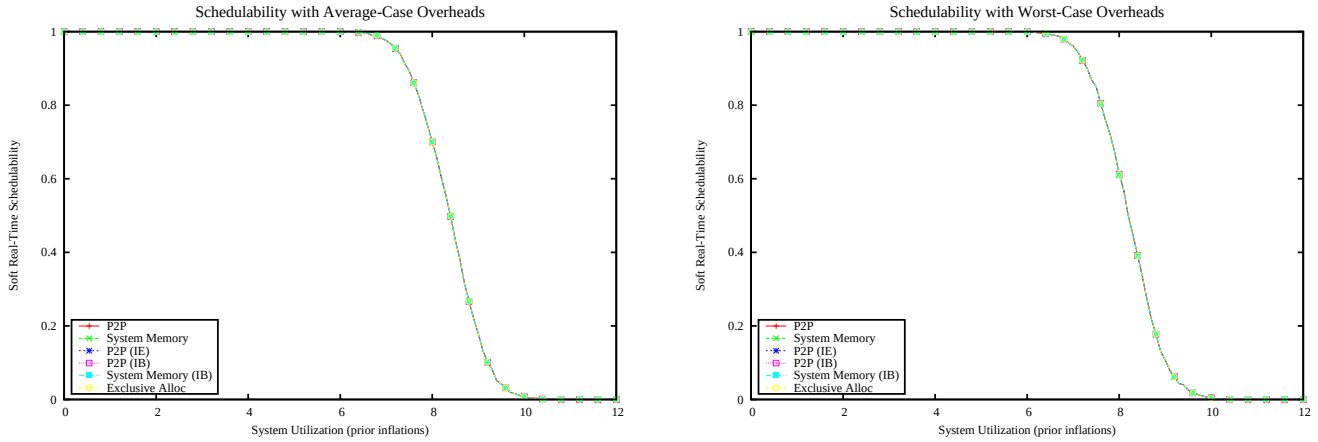

Figure 1965: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

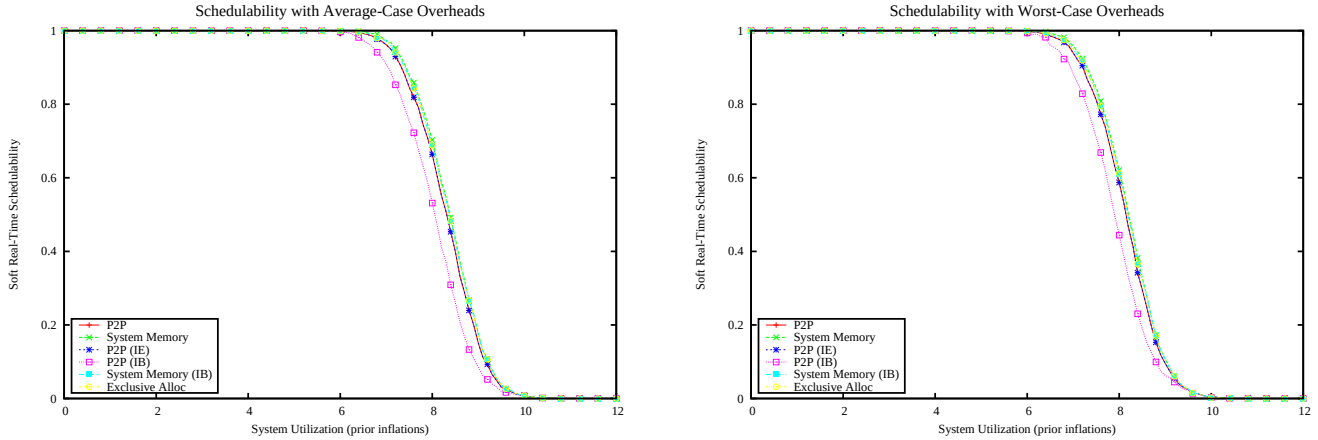

Figure 1966: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

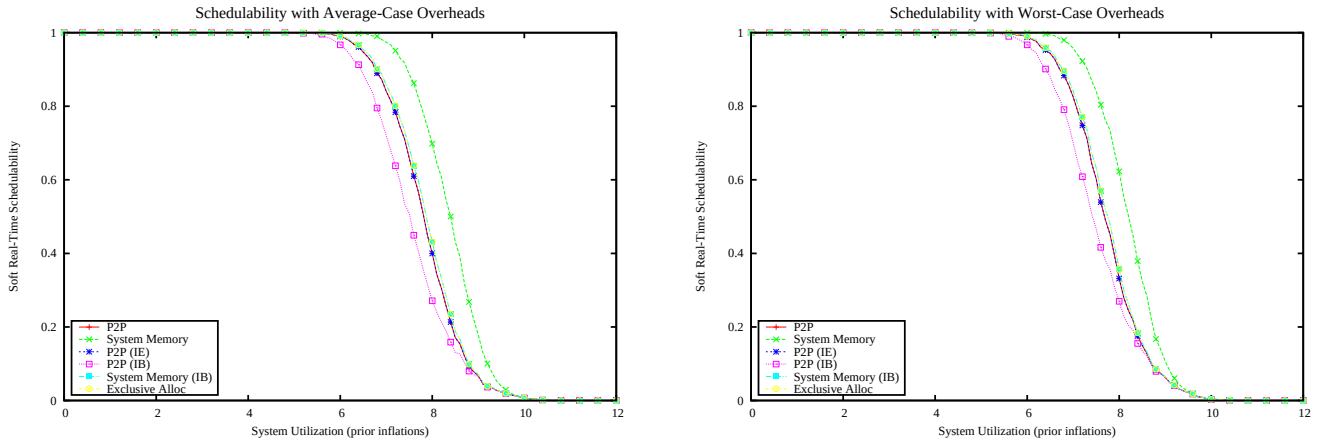

Figure 1967: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

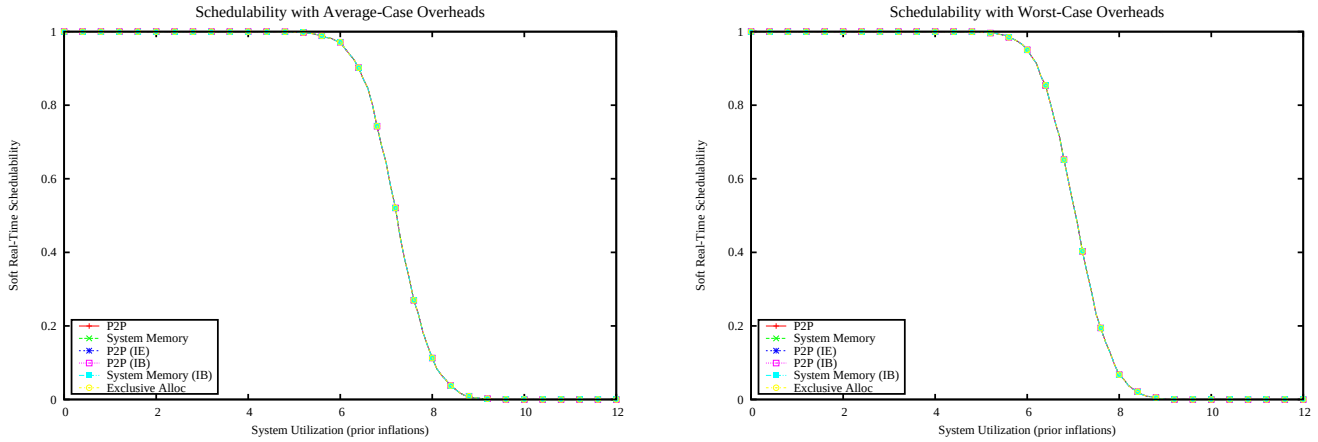

Figure 1968: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

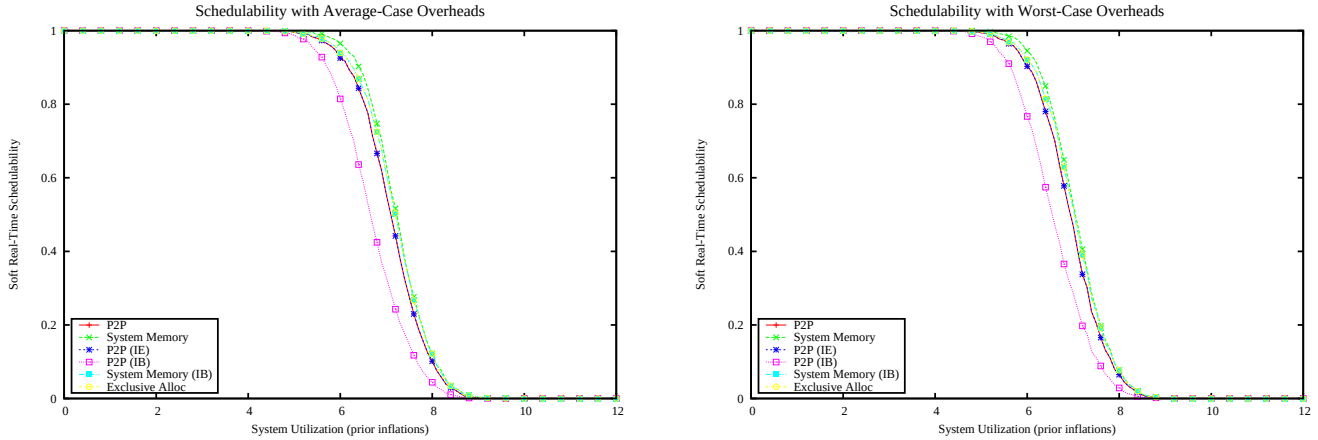

Figure 1969: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

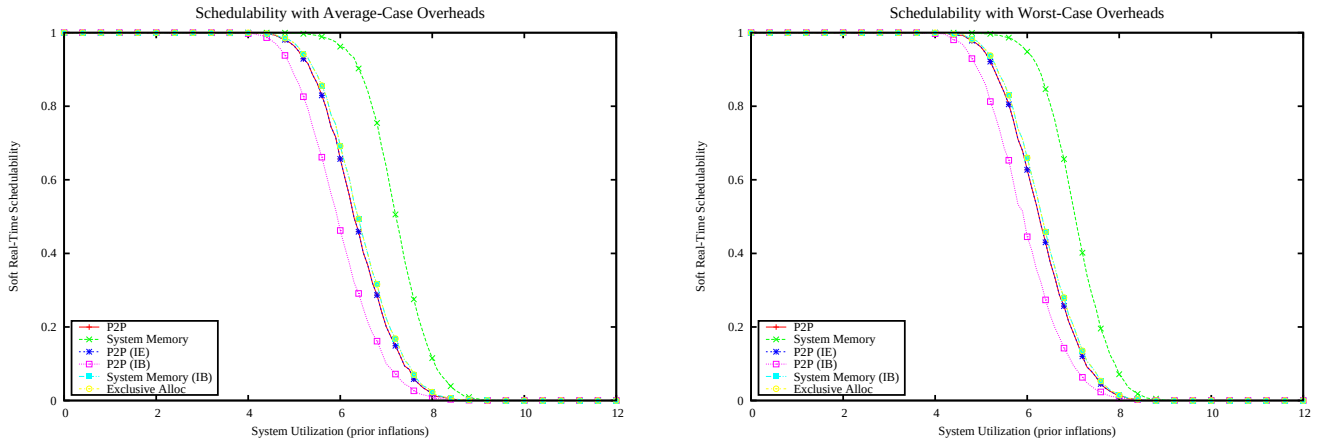

Figure 1970: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

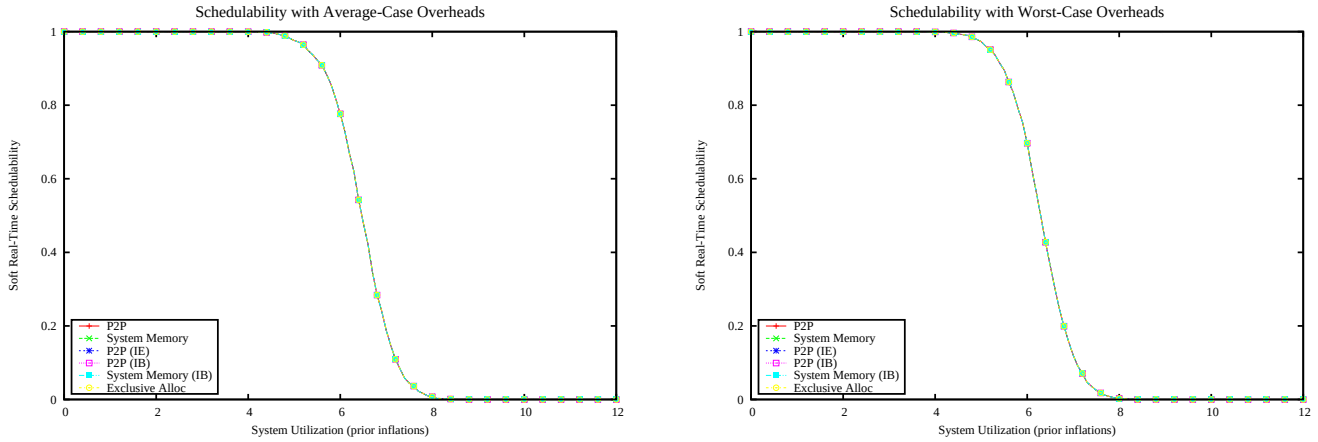

Figure 1971: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

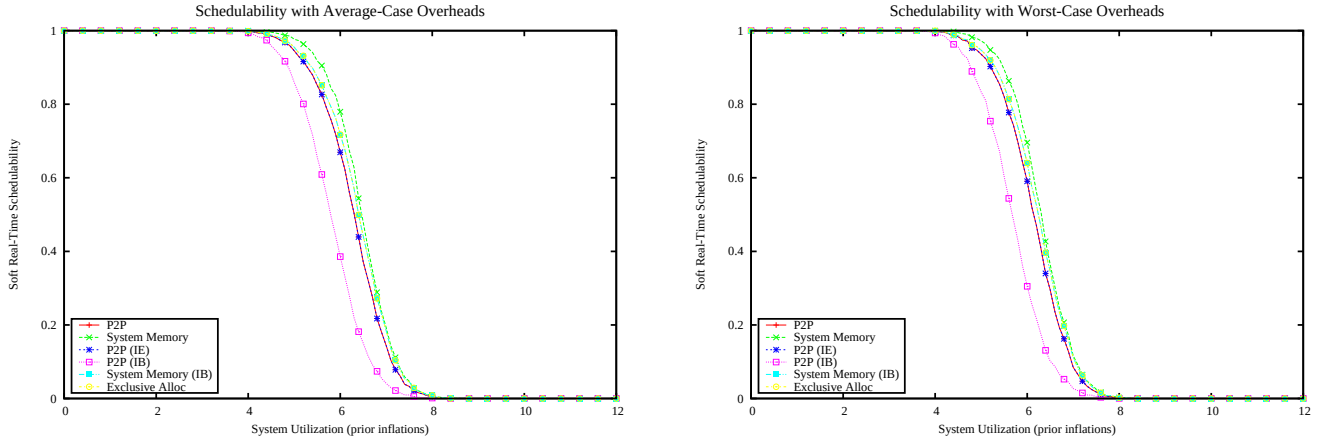

Figure 1972: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

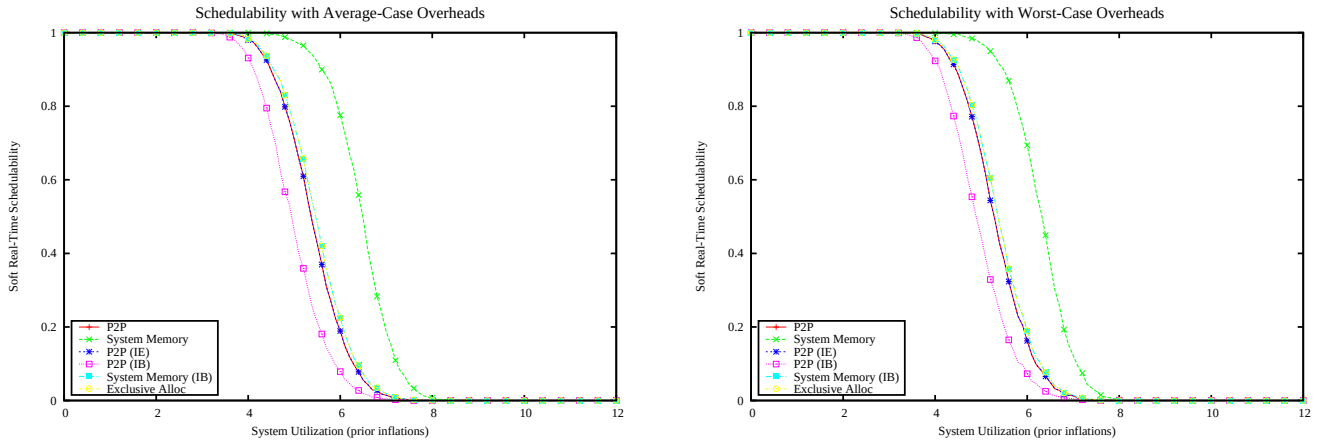

Figure 1973: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

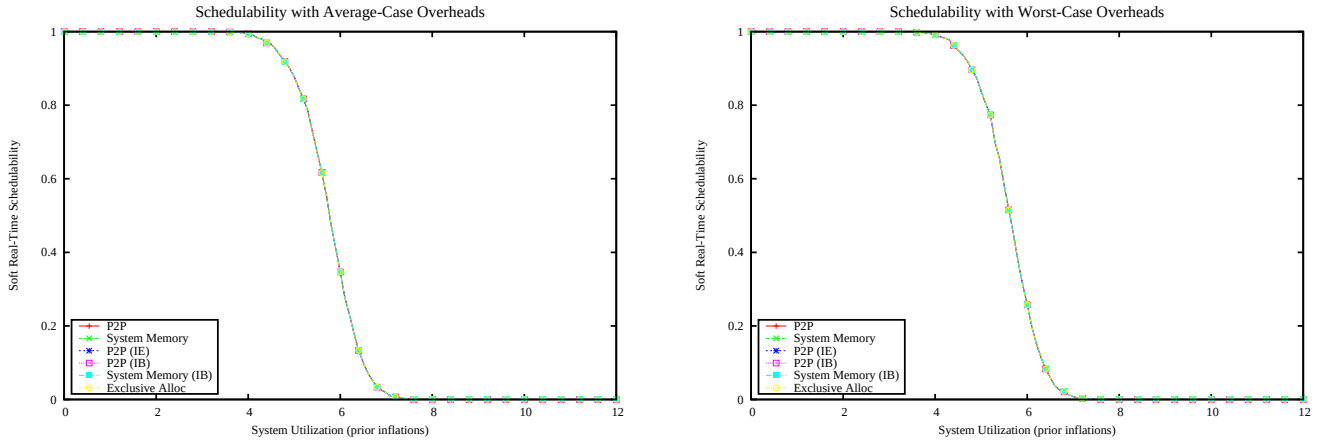

Figure 1974: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

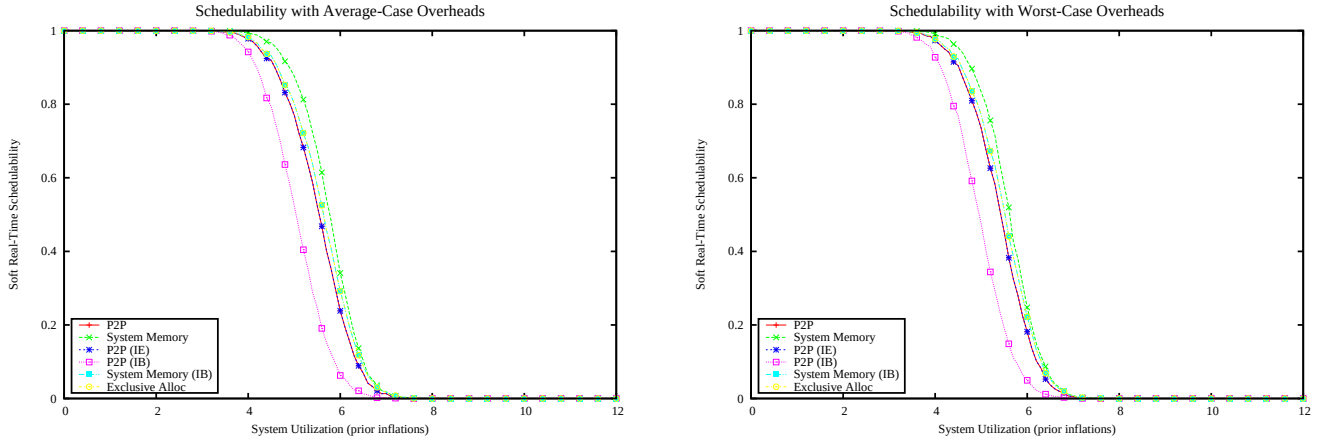

Figure 1975: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

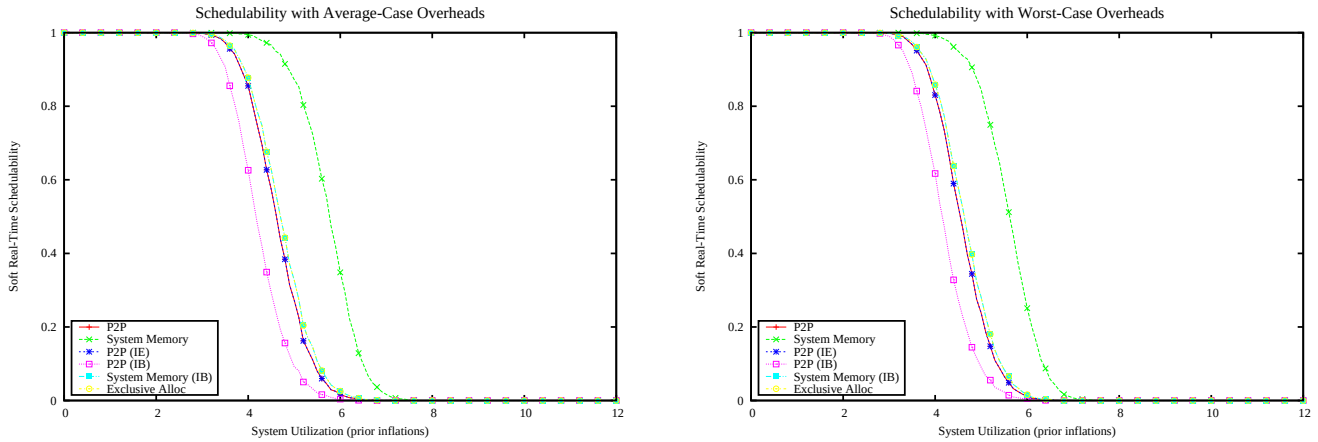

Figure 1976: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

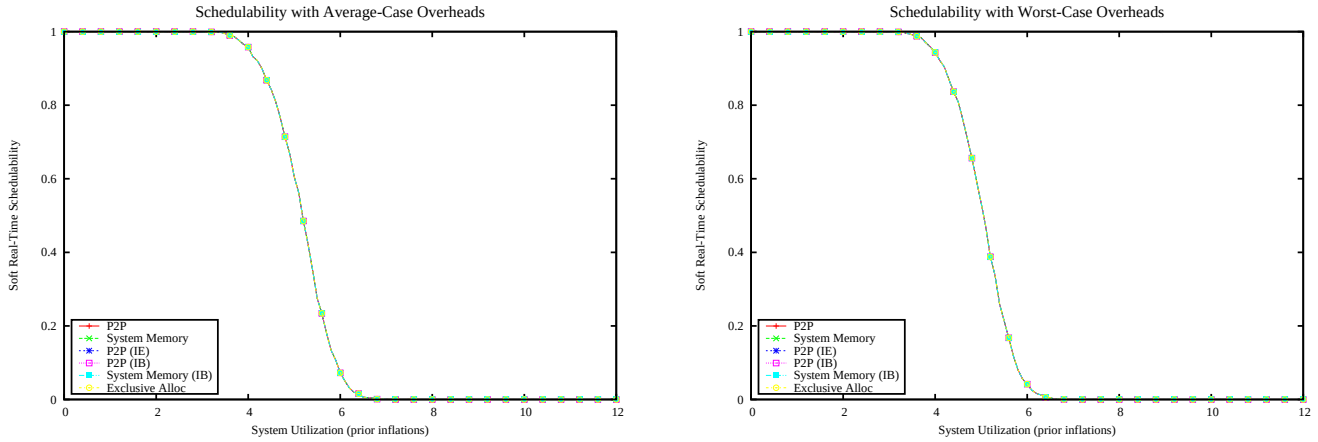

Figure 1977: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

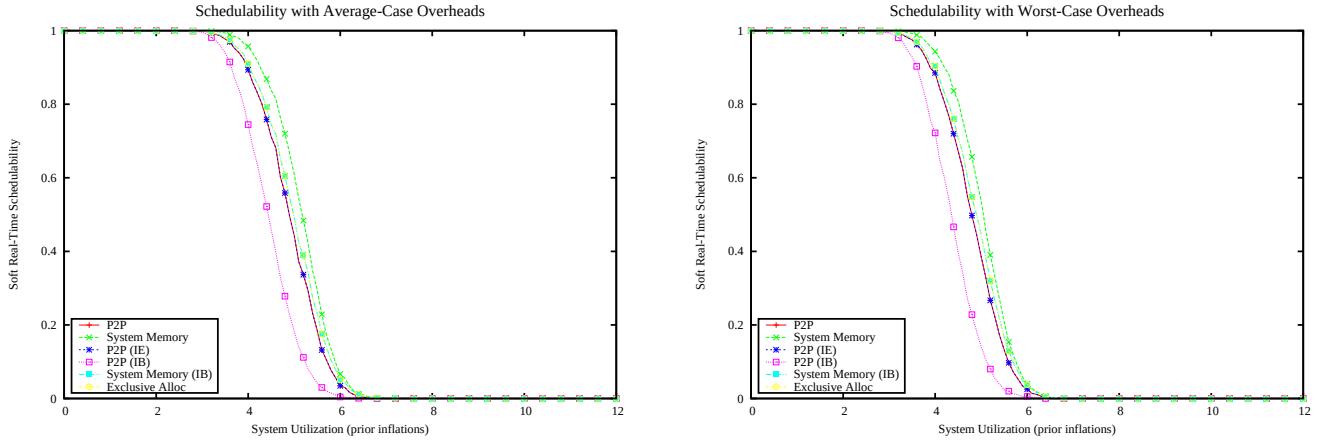

Figure 1978: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

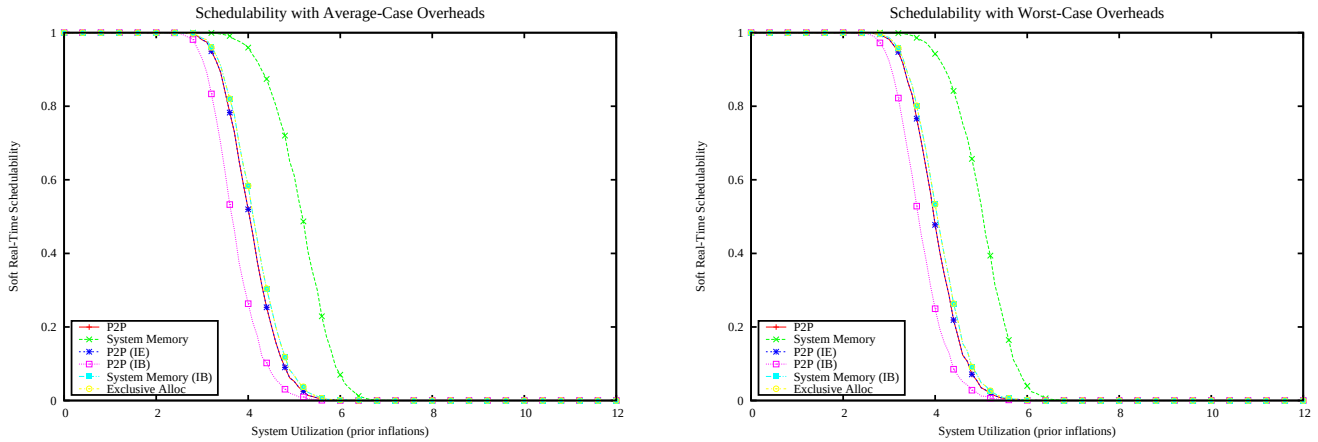

Figure 1979: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

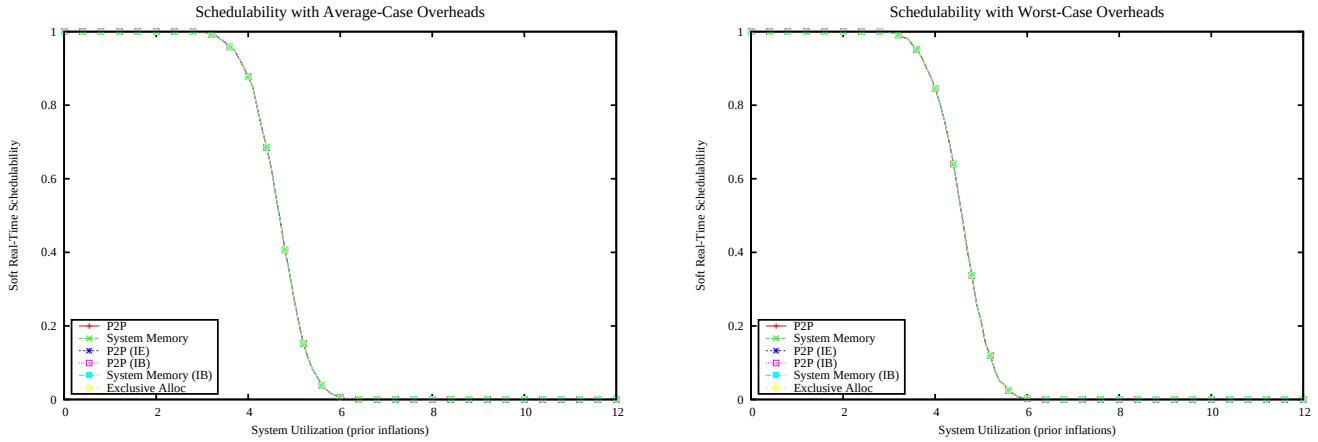

Figure 1980: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

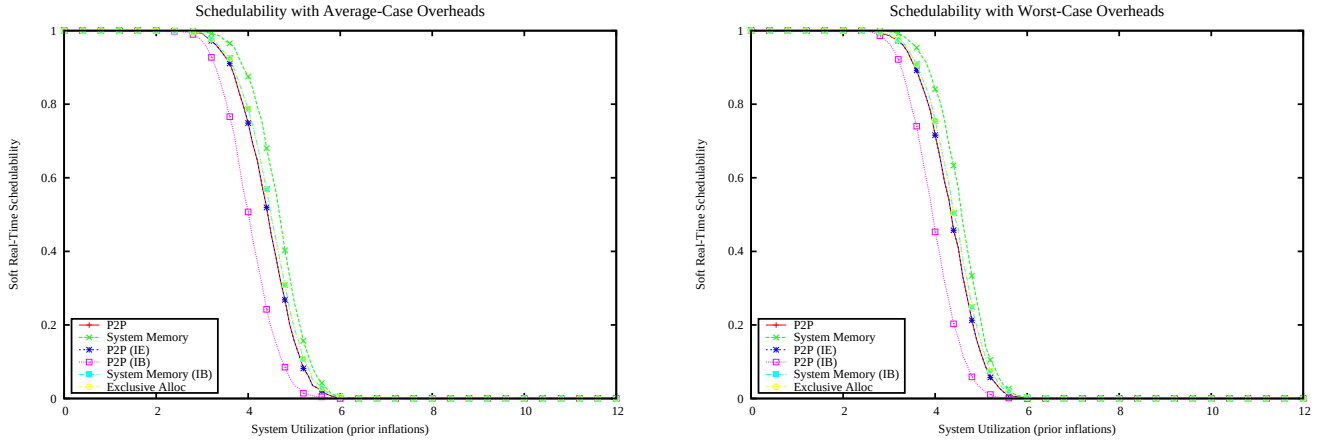

Figure 1981: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

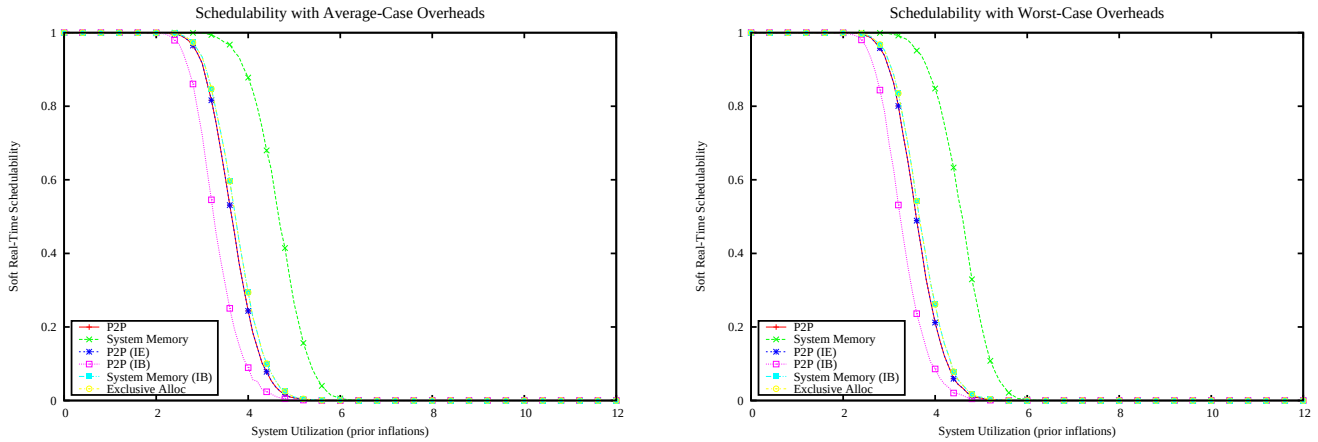

Figure 1982: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

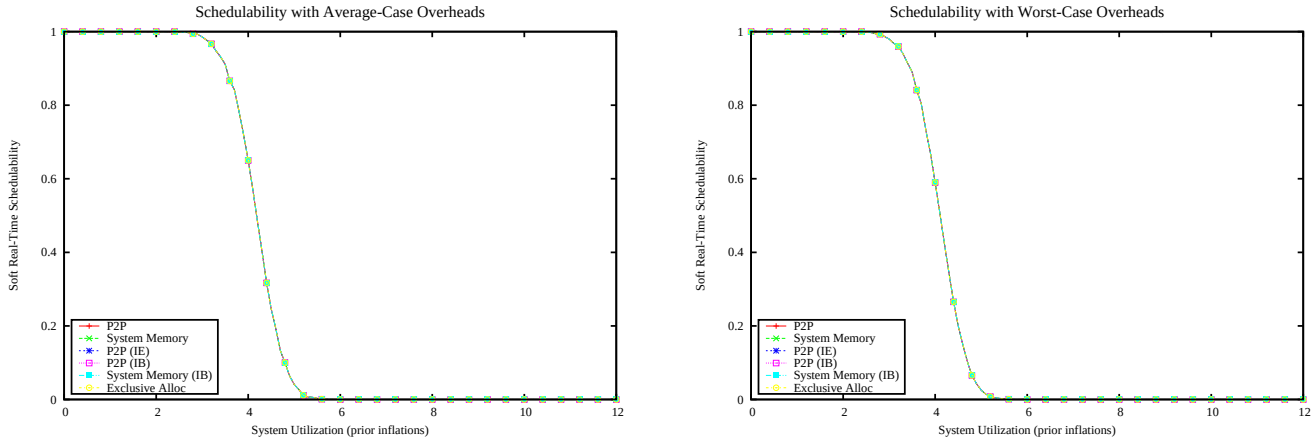

Figure 1983: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

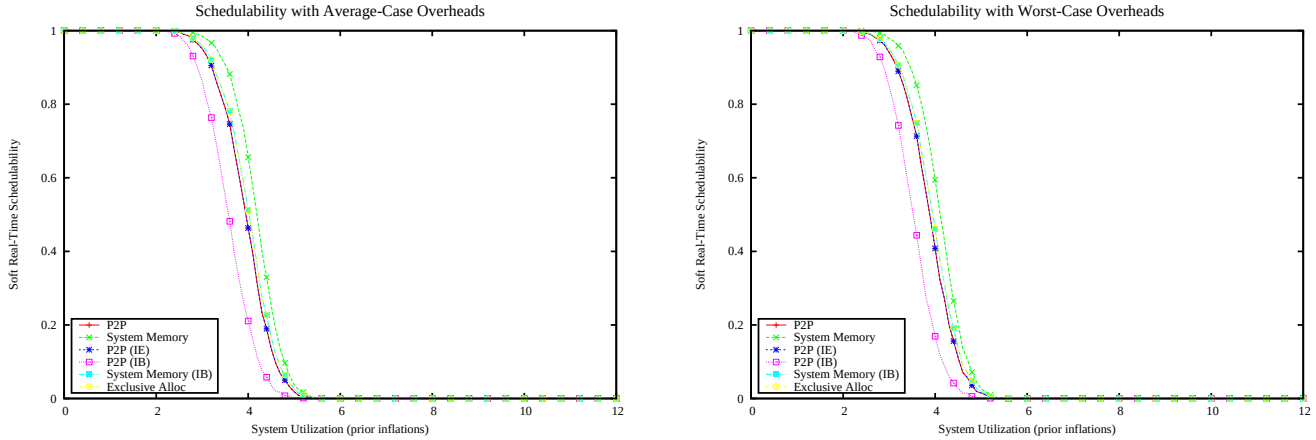

Figure 1984: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

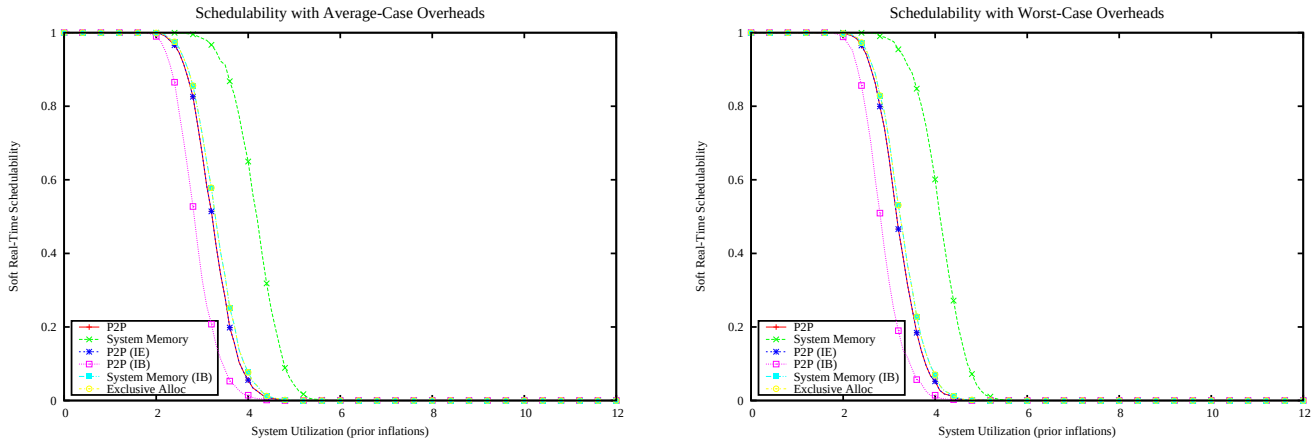

Figure 1985: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

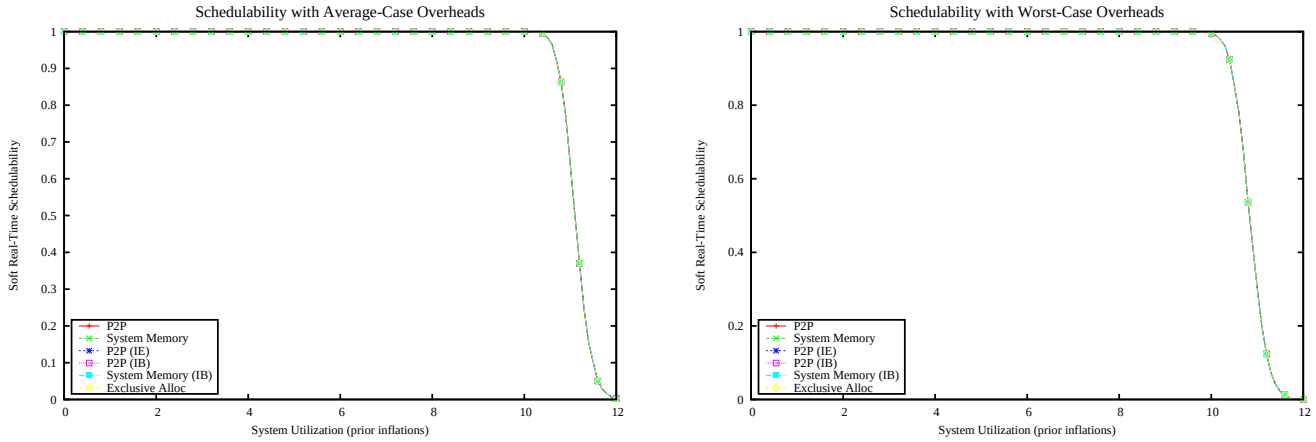

Figure 1986: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

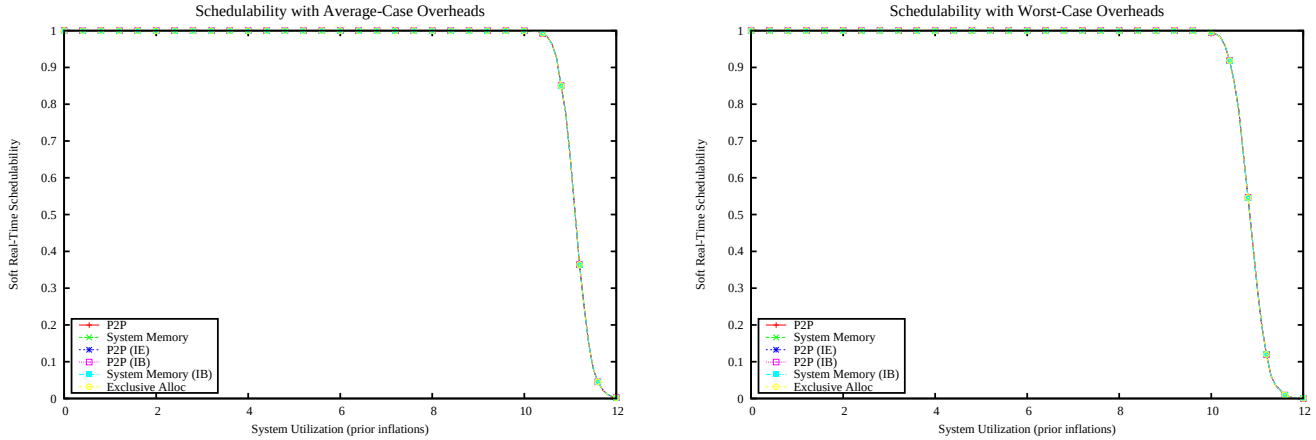

Figure 1987: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

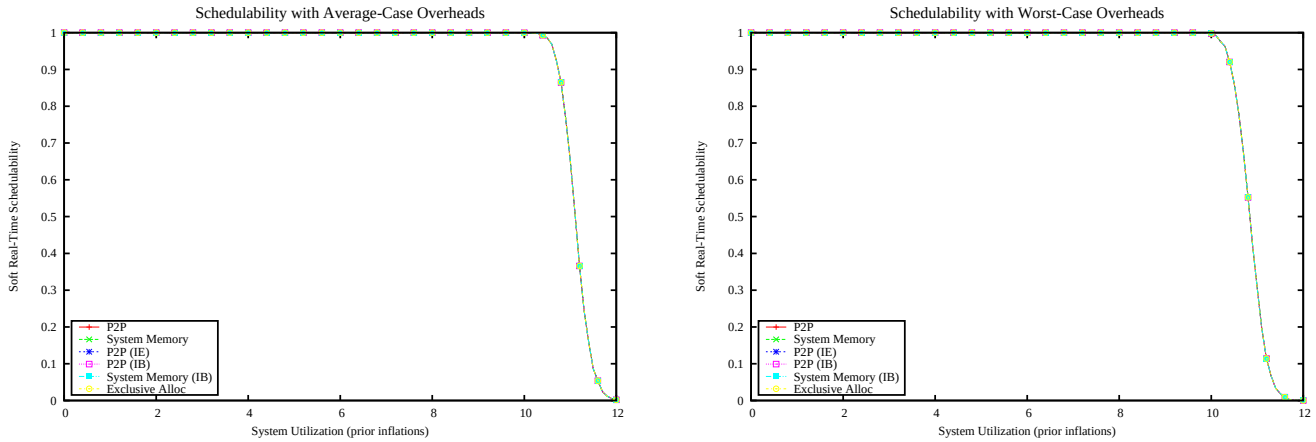

Figure 1988: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

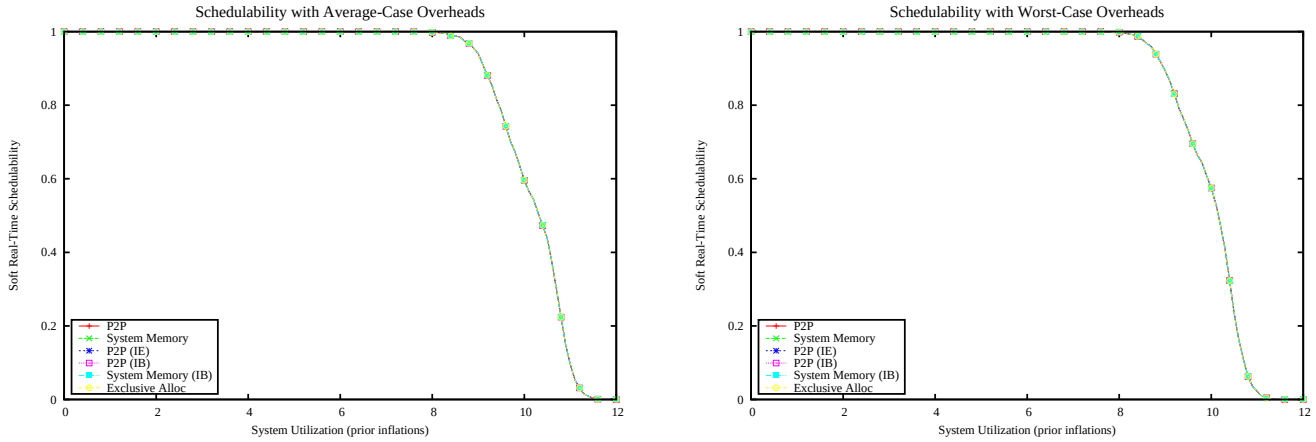

Figure 1989: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

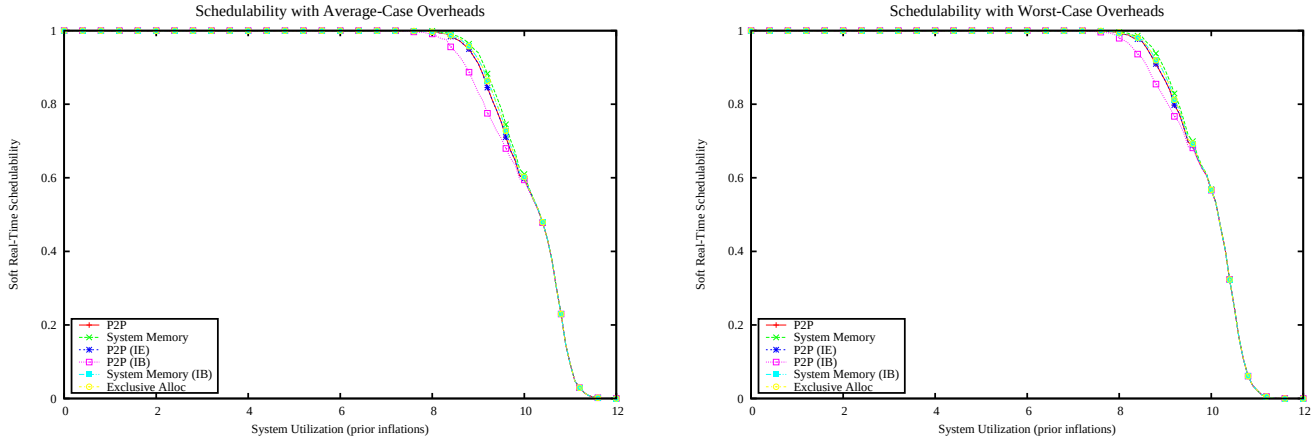

Figure 1990: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

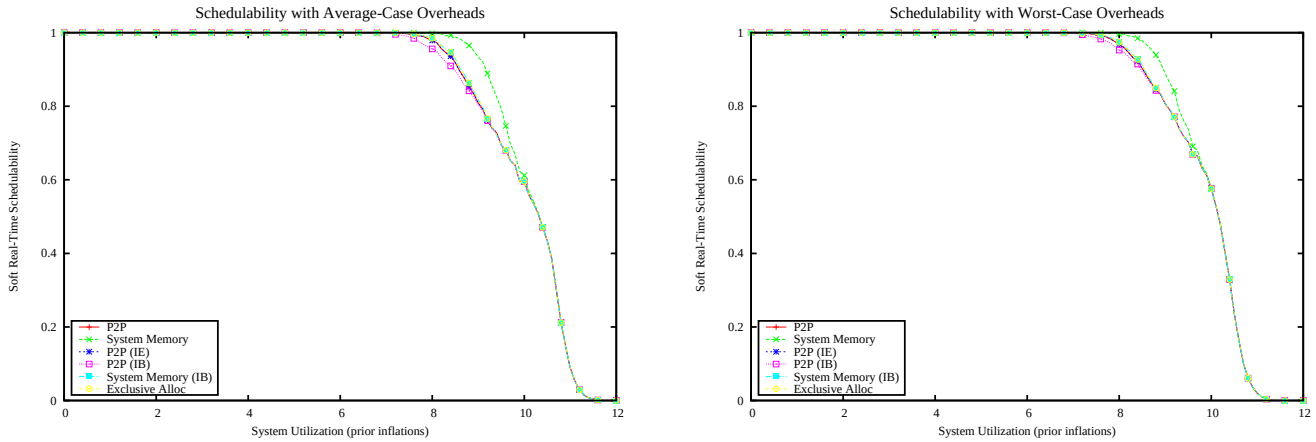

Figure 1991: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

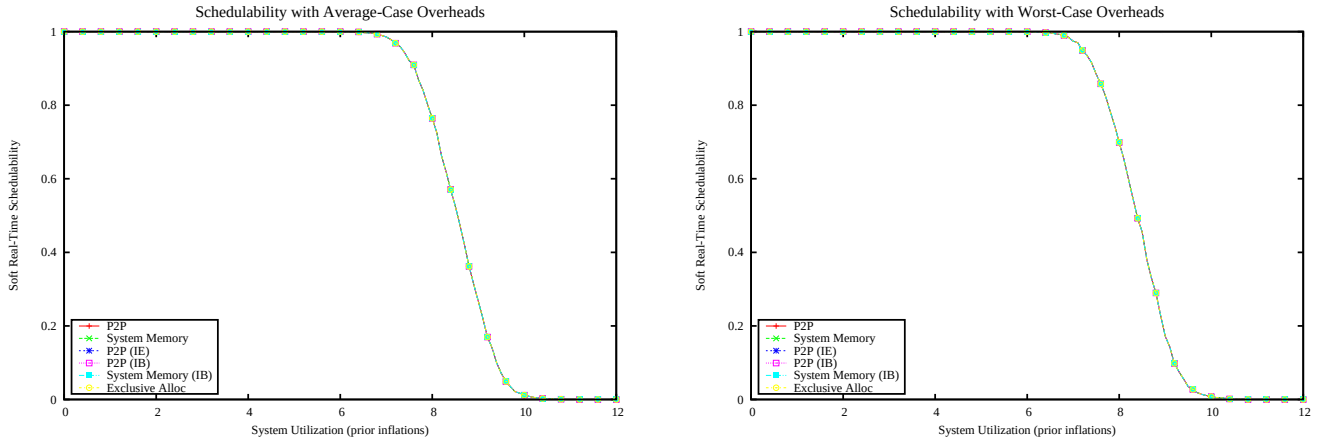

Figure 1992: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

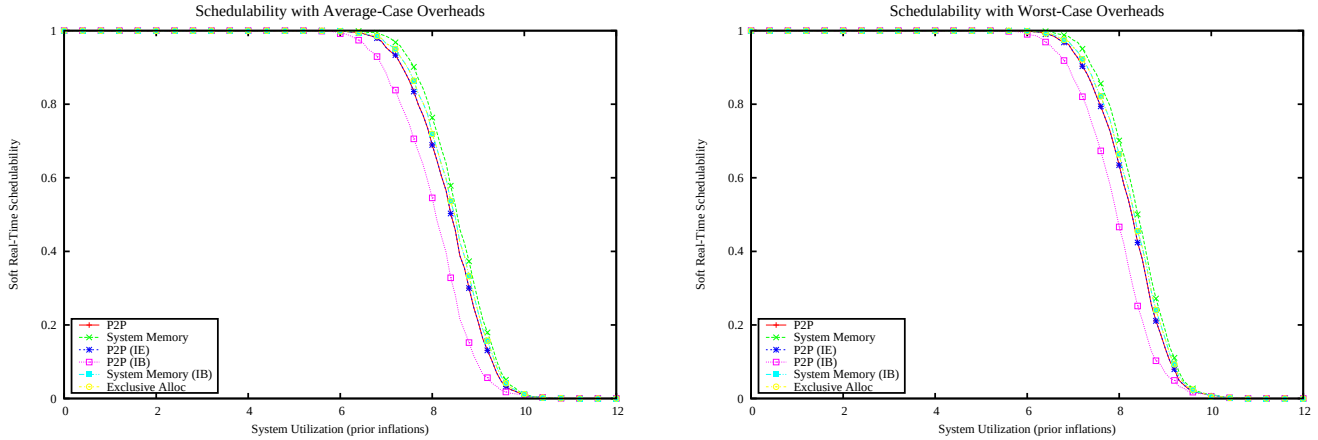

Figure 1993: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

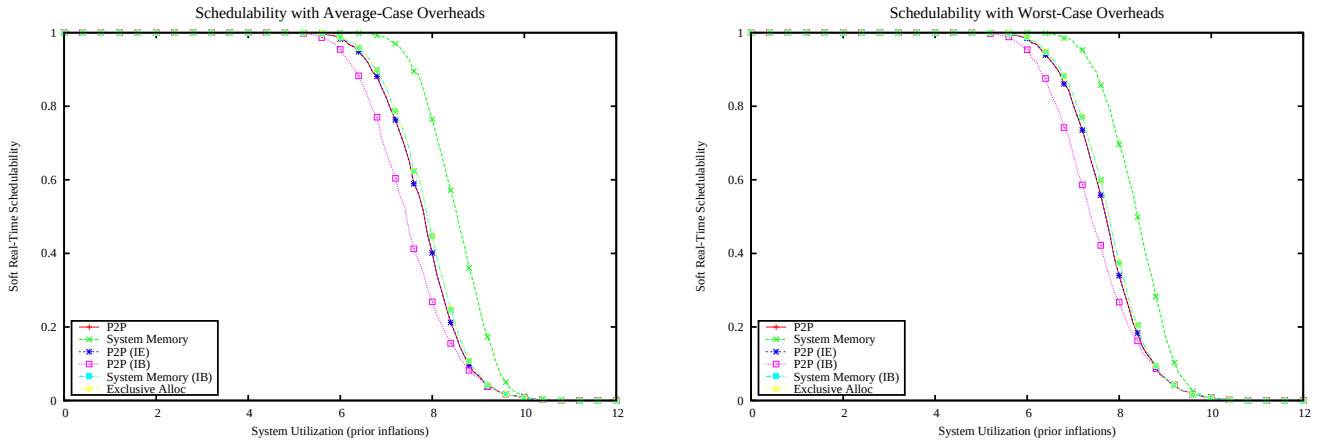

Figure 1994: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

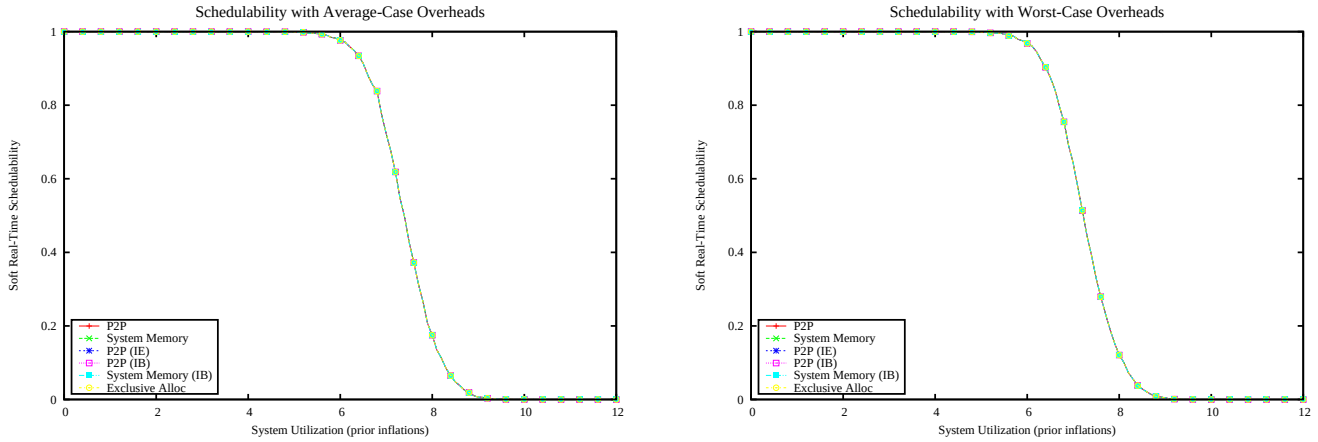

Figure 1995: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

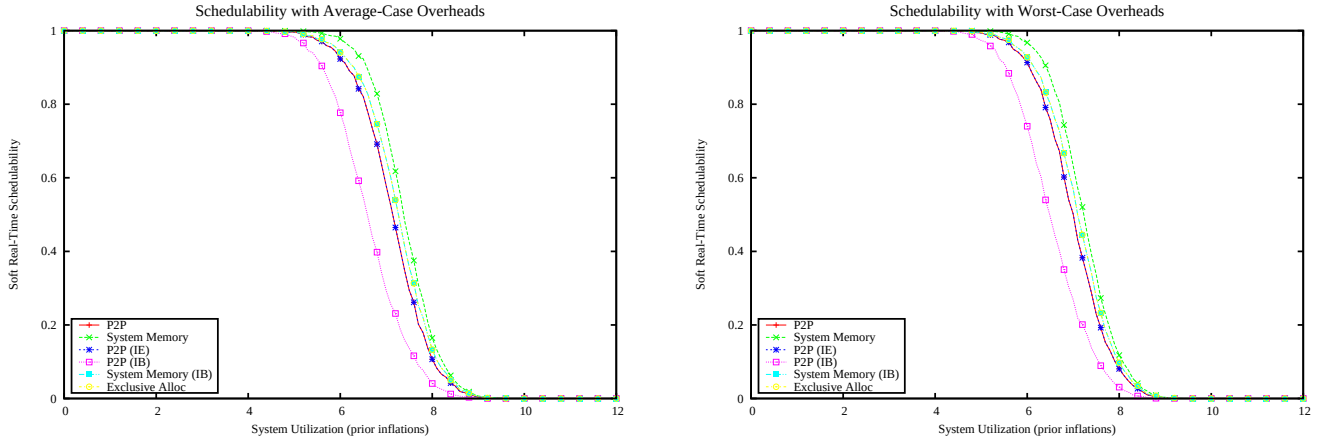

Figure 1996: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

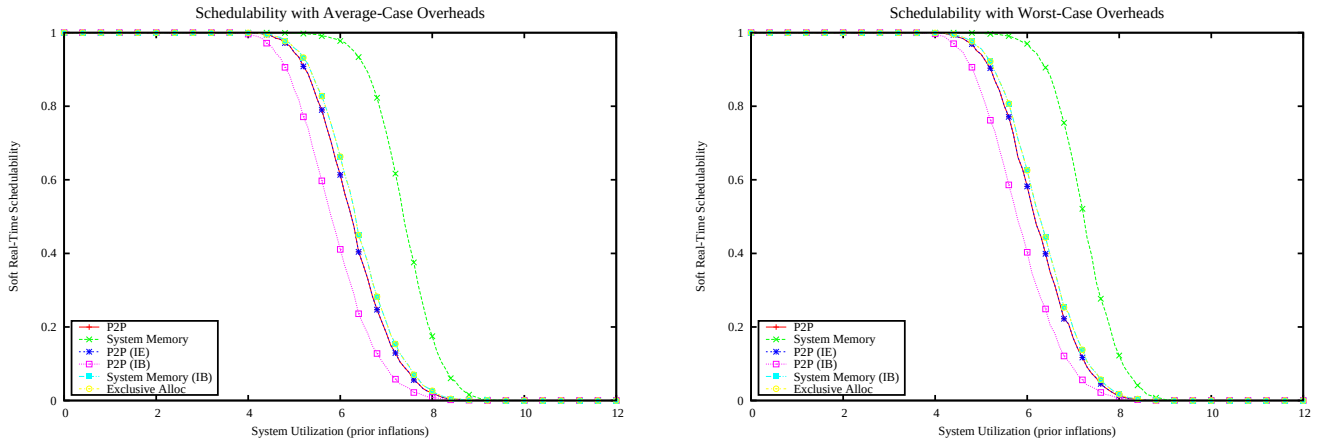

Figure 1997: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

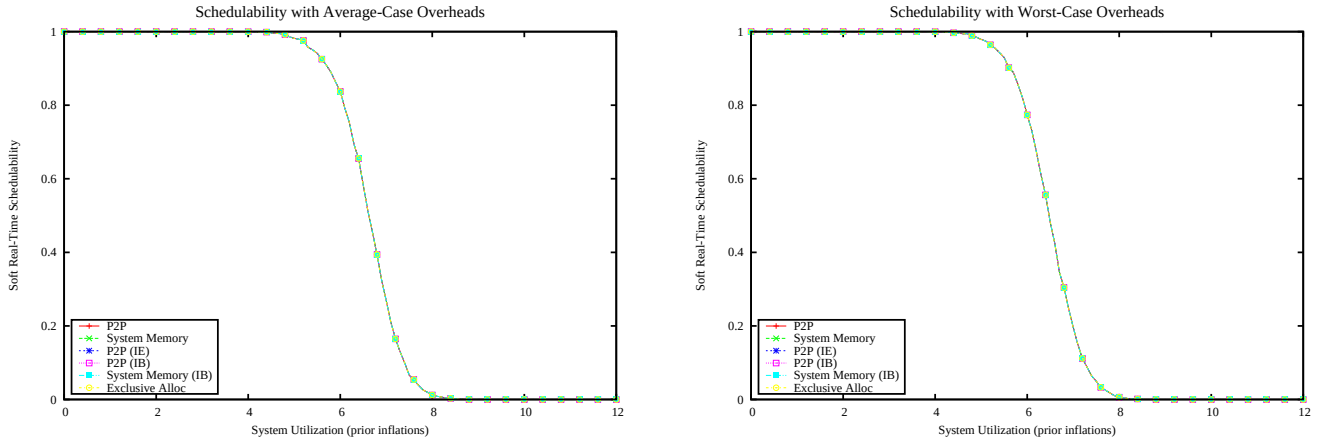

Figure 1998: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

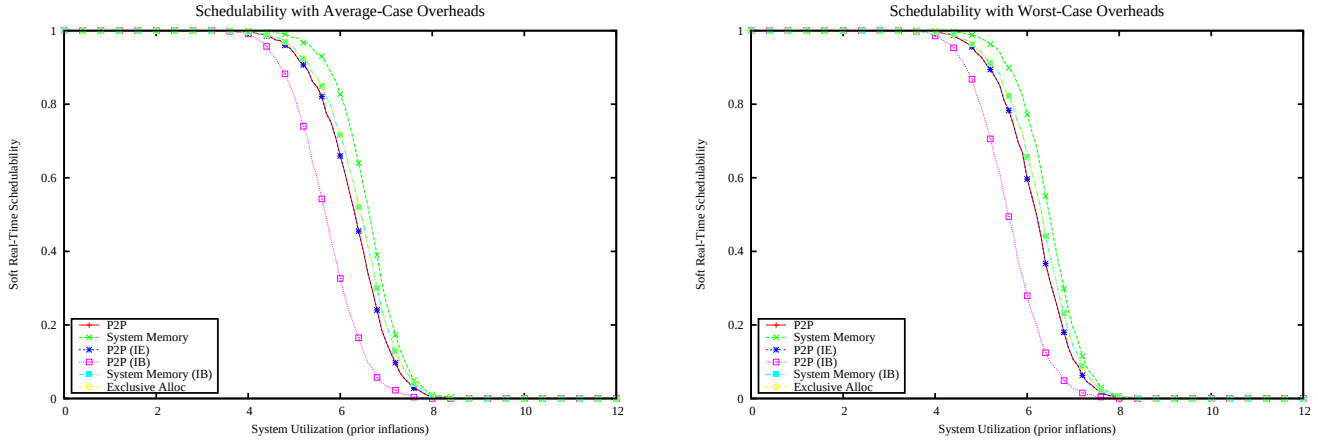

Figure 1999: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

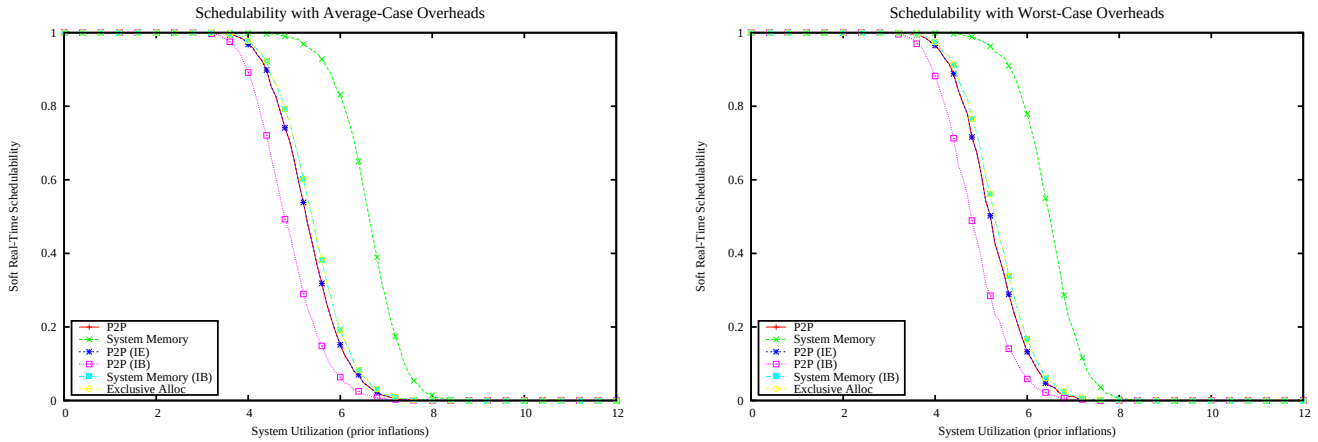

Figure 2000: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

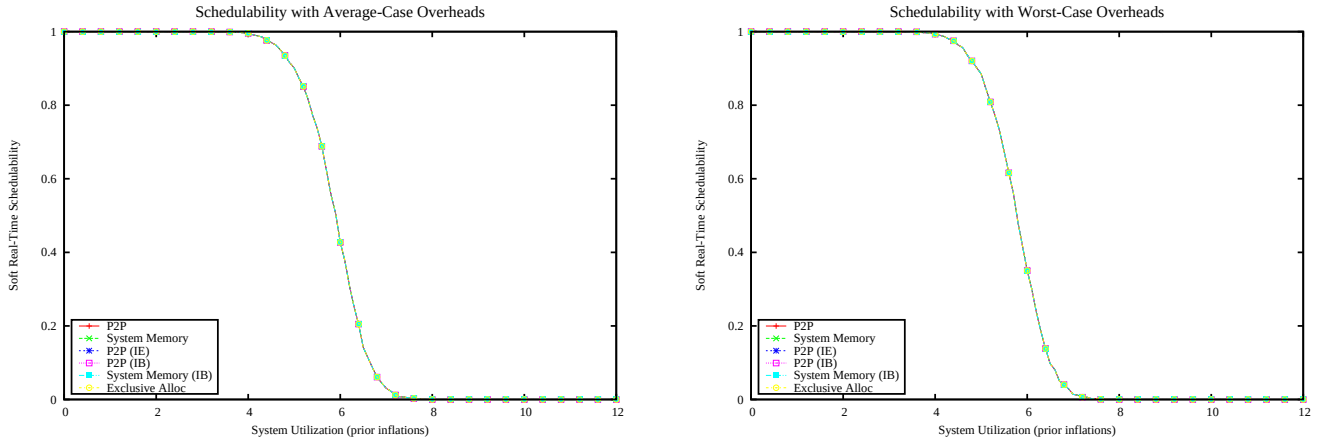

Figure 2001: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

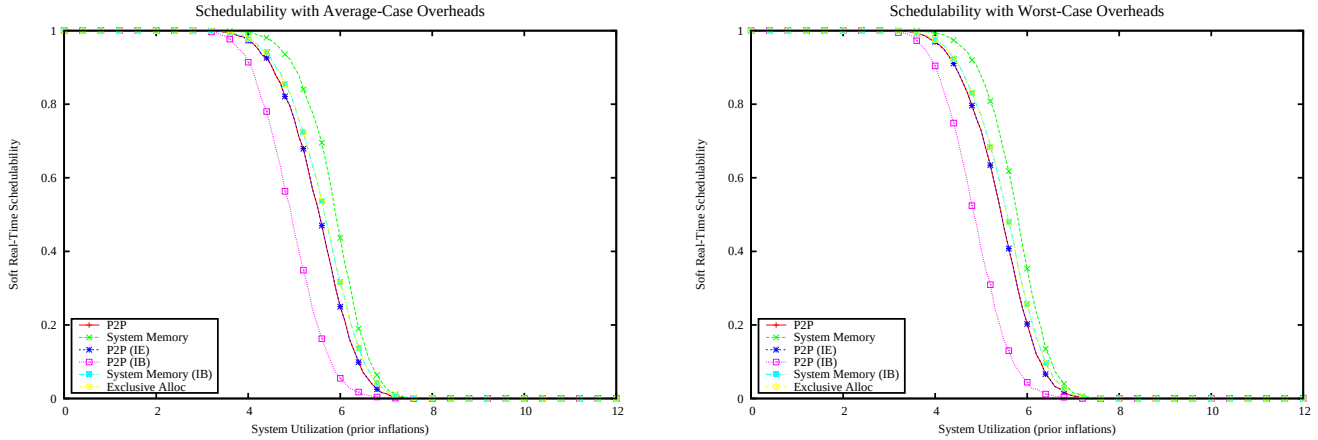

Figure 2002: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

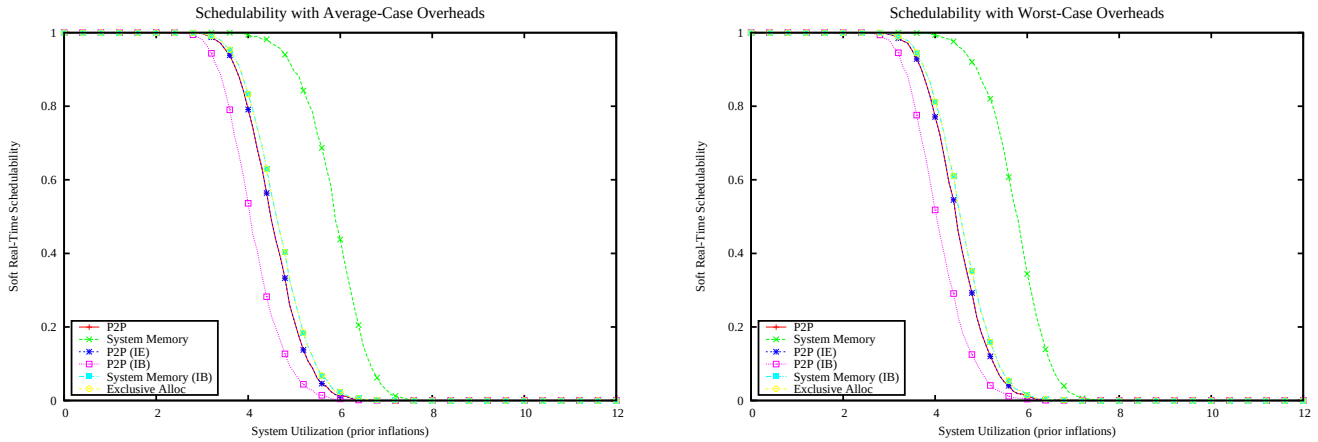

Figure 2003: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

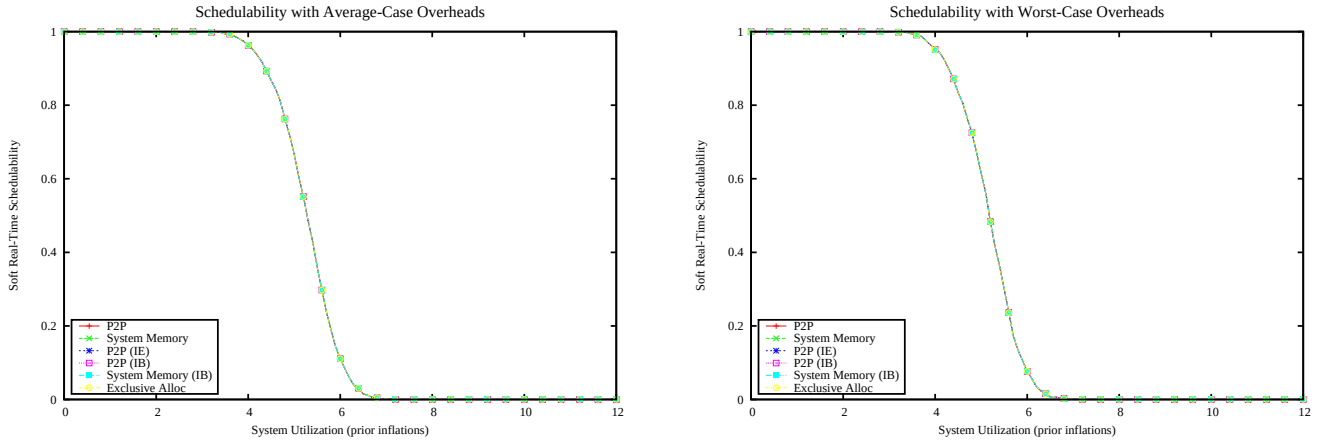

Figure 2004: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

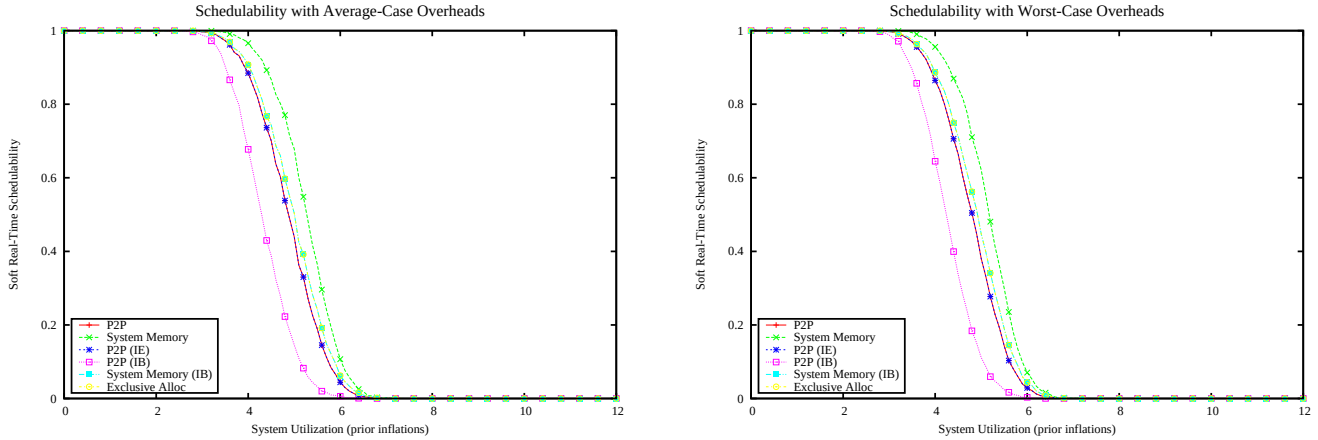

Figure 2005: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

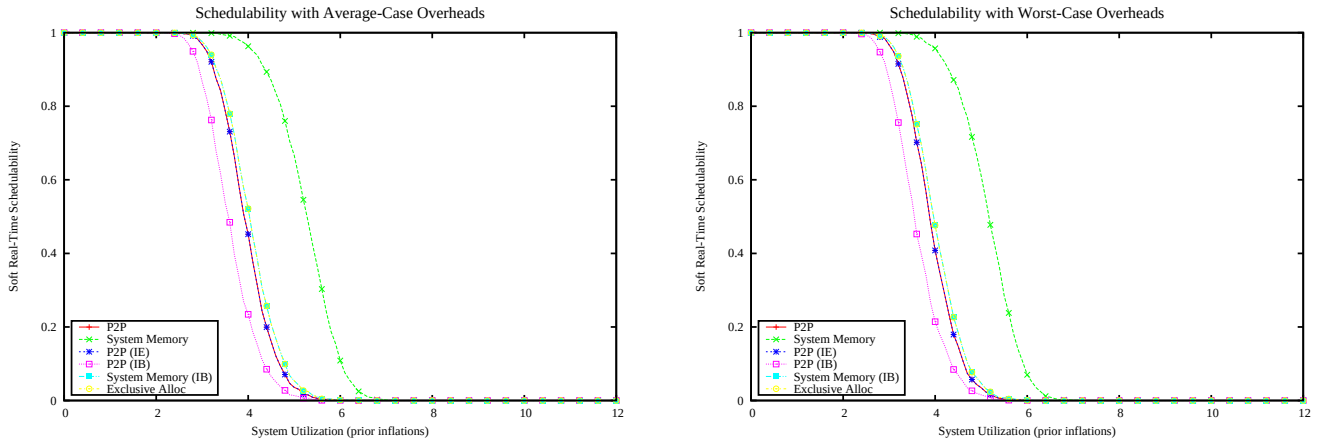

Figure 2006: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

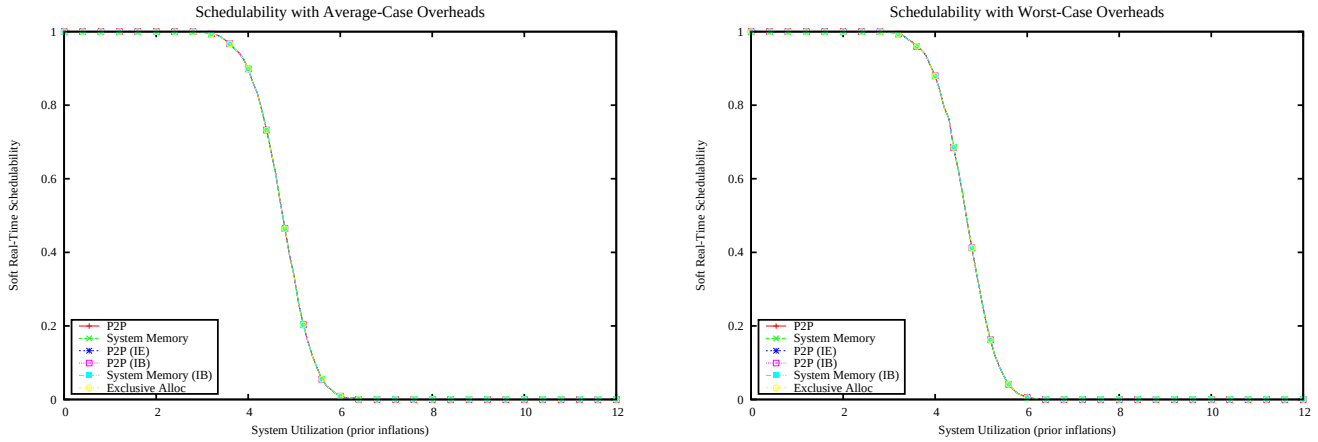

Figure 2007: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

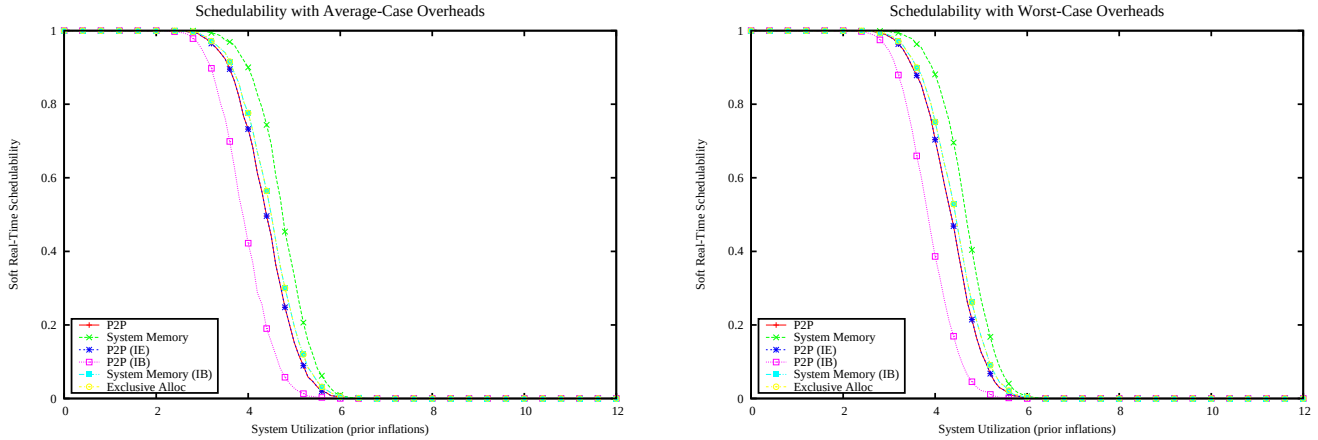

Figure 2008: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

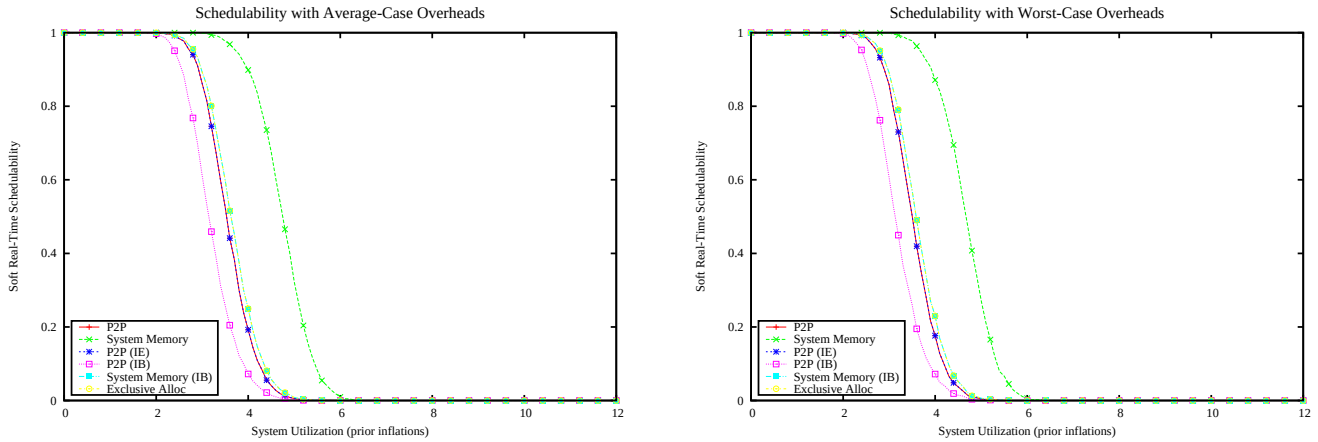

Figure 2009: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

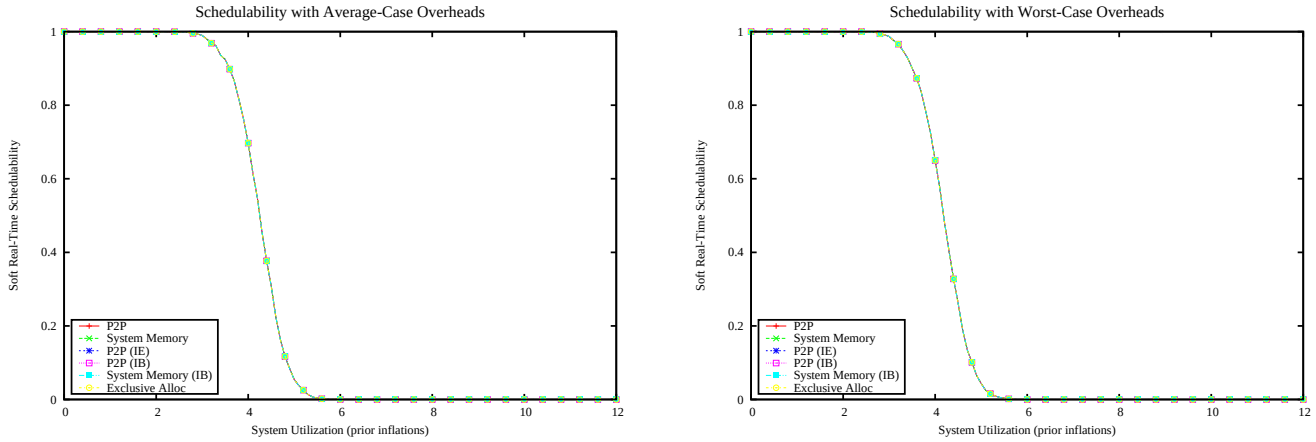

Figure 2010: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

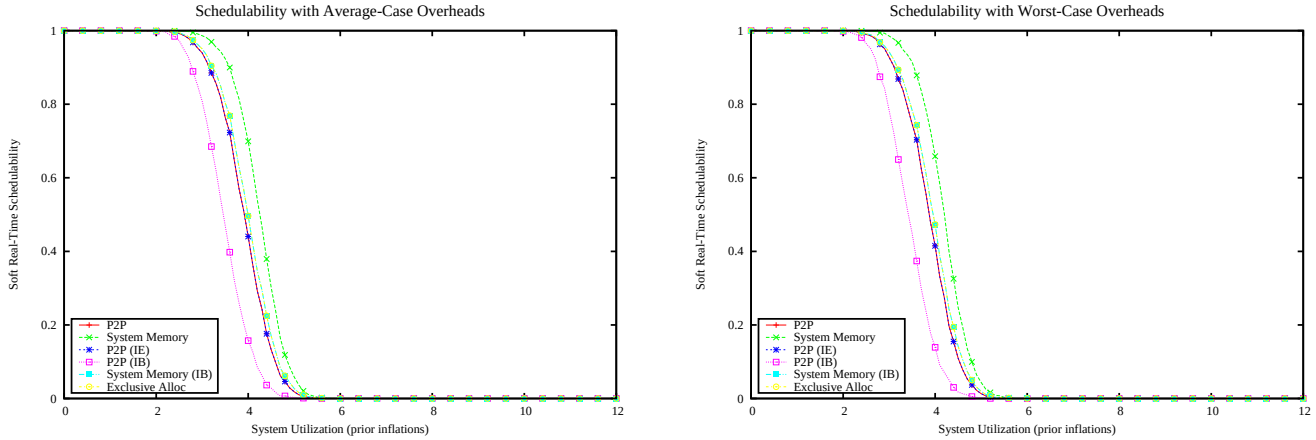

Figure 2011: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

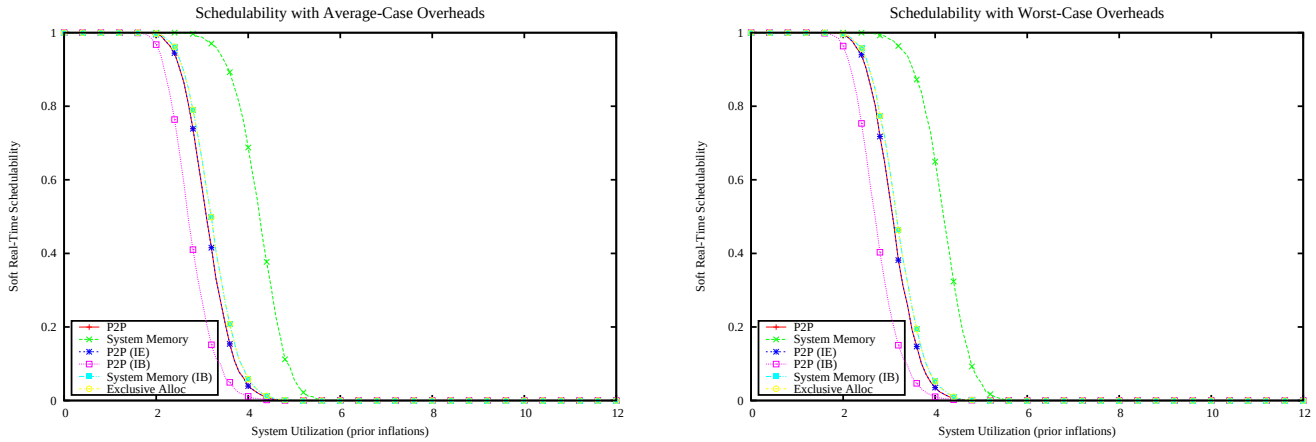

Figure 2012: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

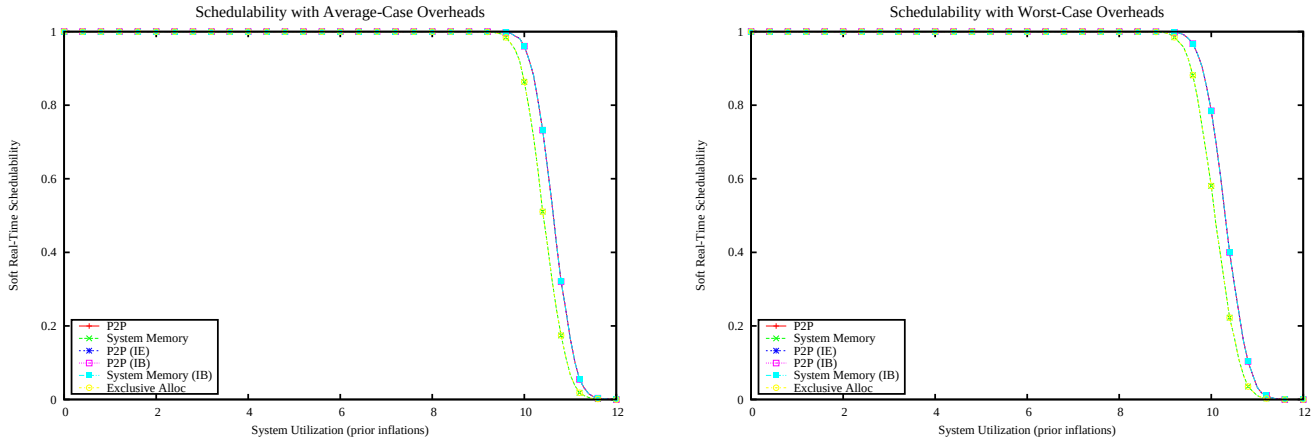

Figure 2013: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

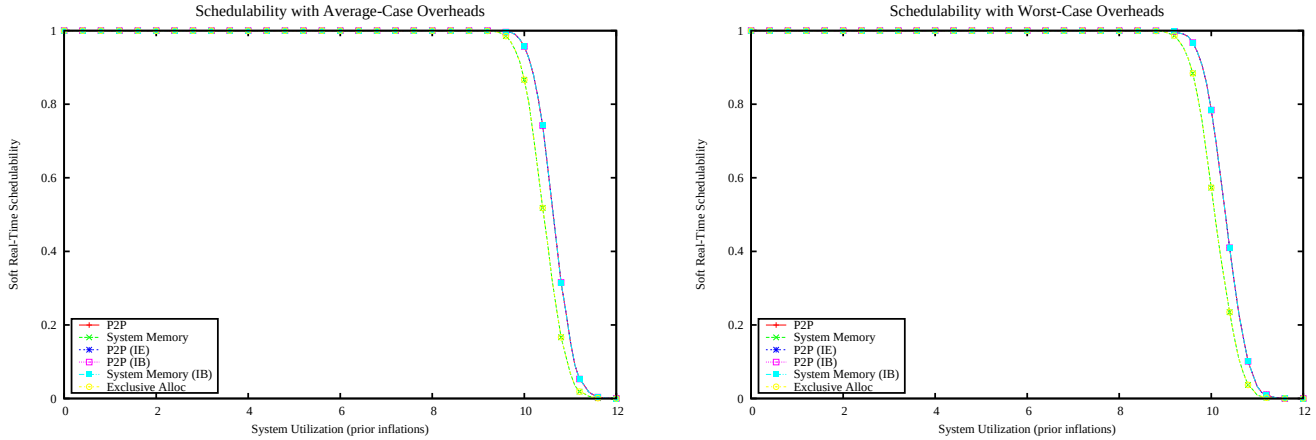

Figure 2014: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

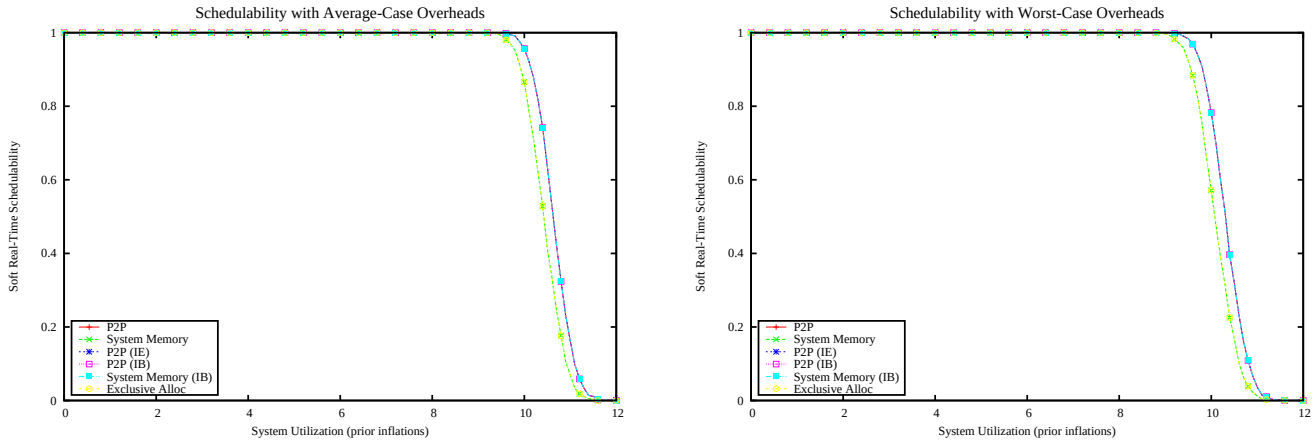

Figure 2015: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

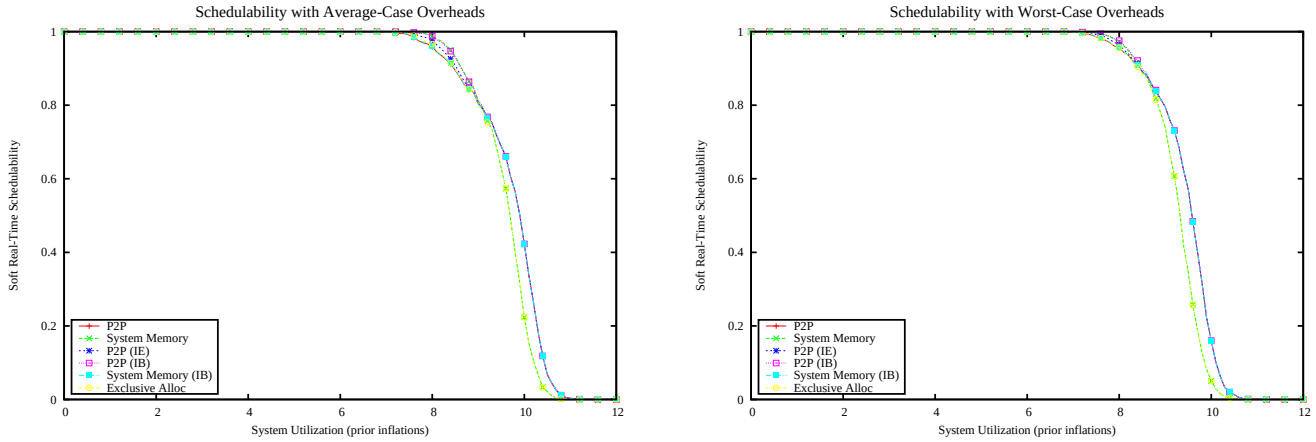

Figure 2016: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

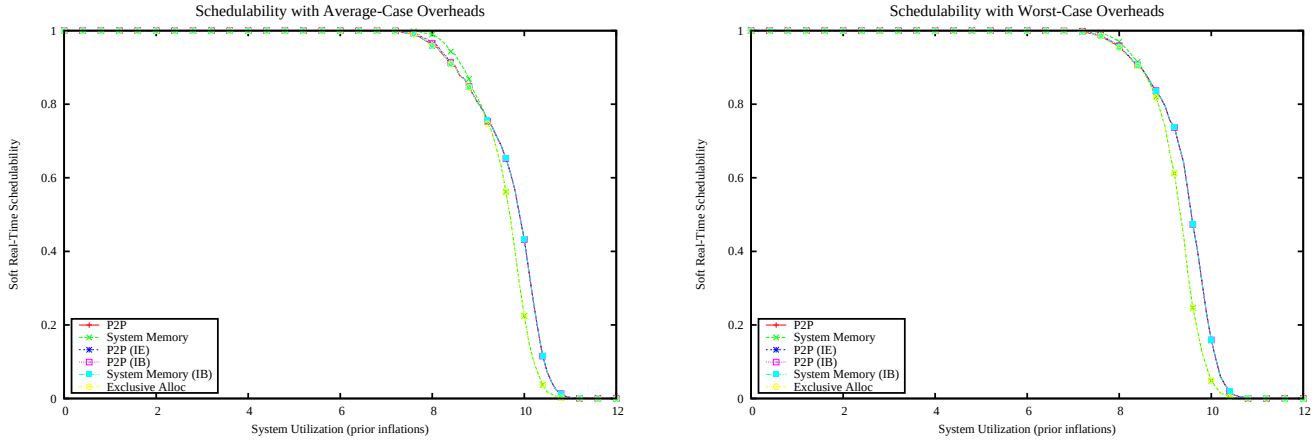

Figure 2017: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

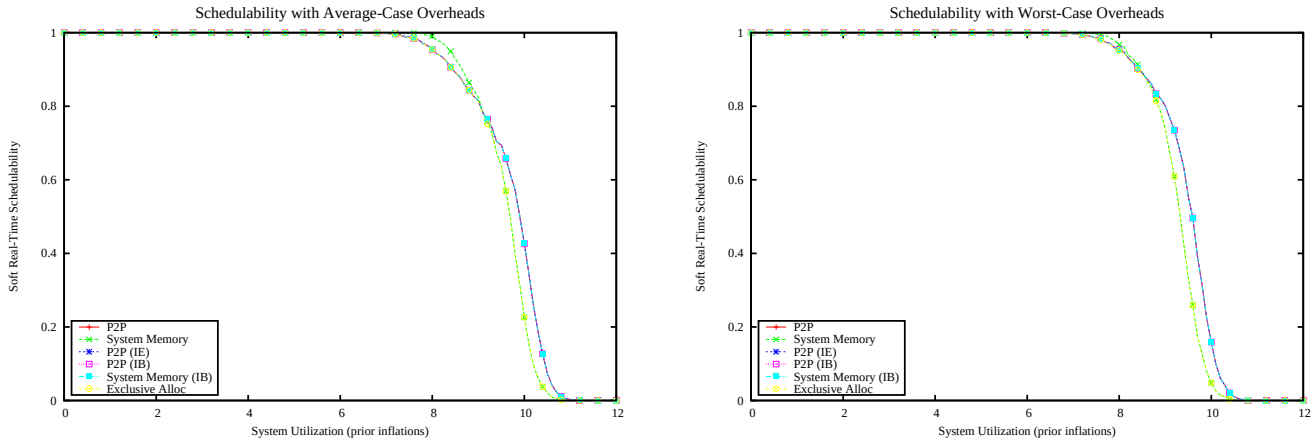

Figure 2018: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

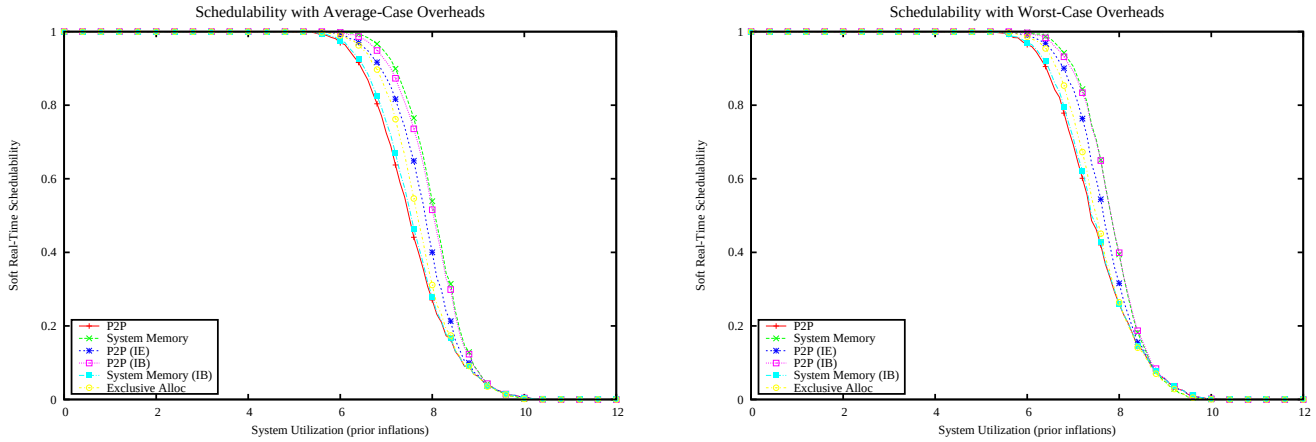

Figure 2019: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

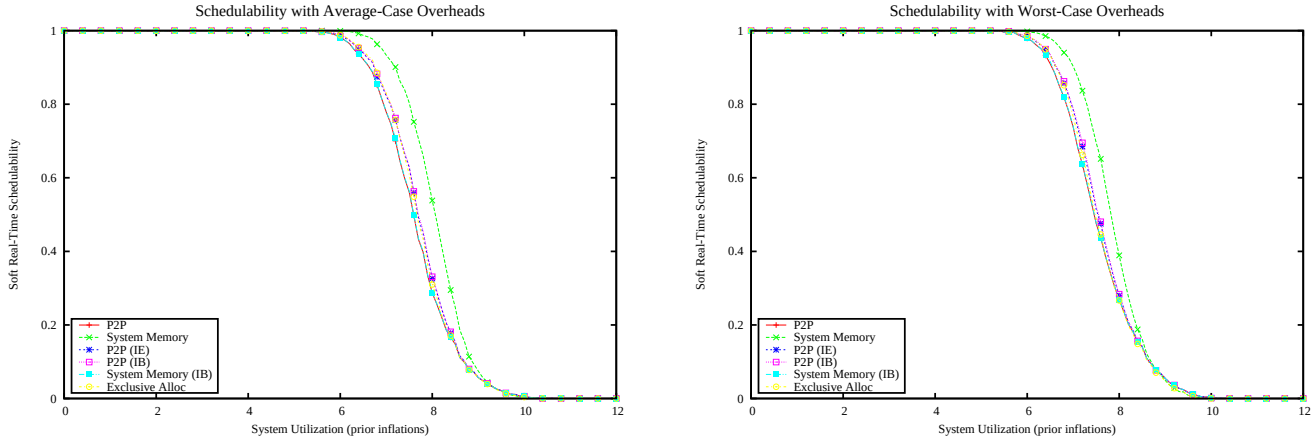

Figure 2020: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

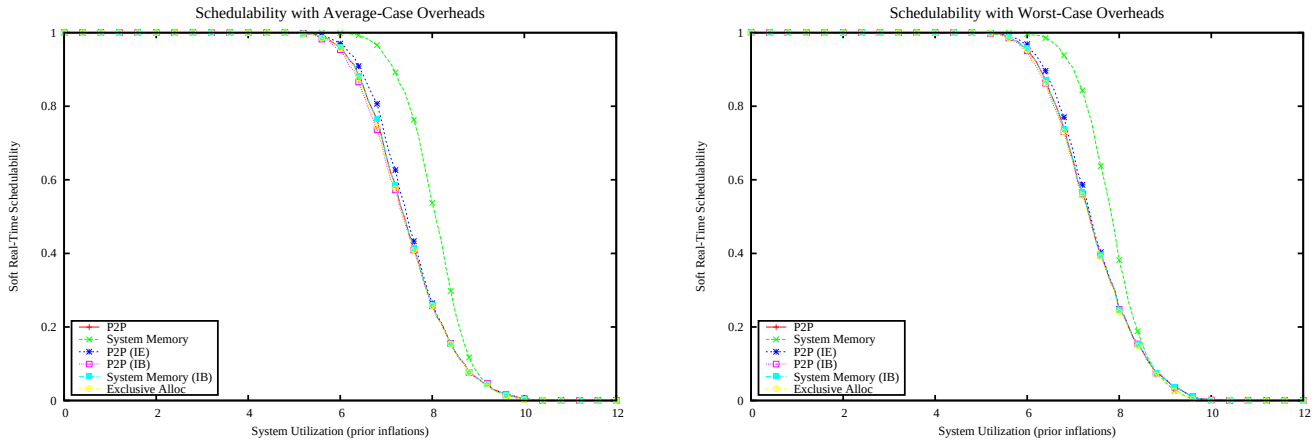

Figure 2021: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

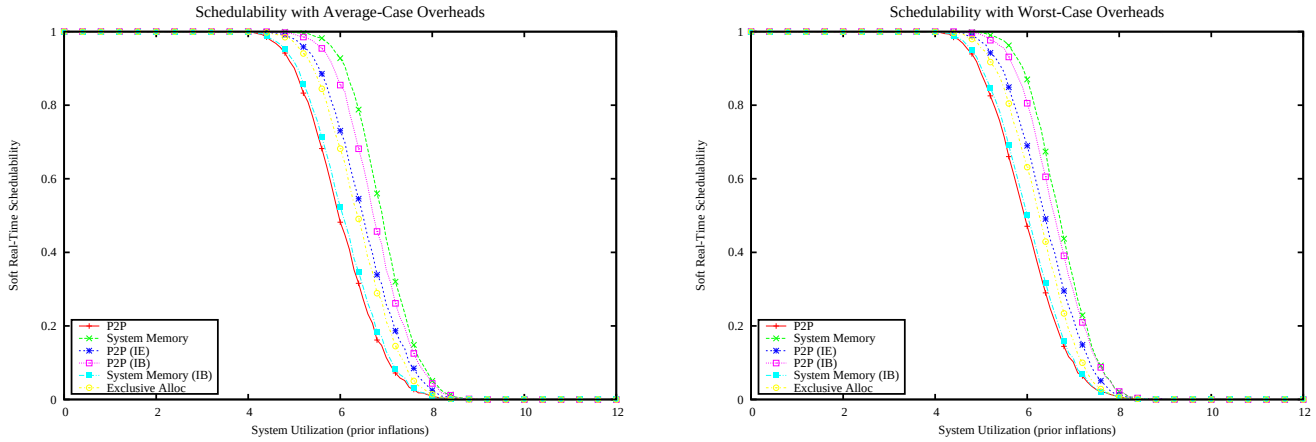

Figure 2022: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

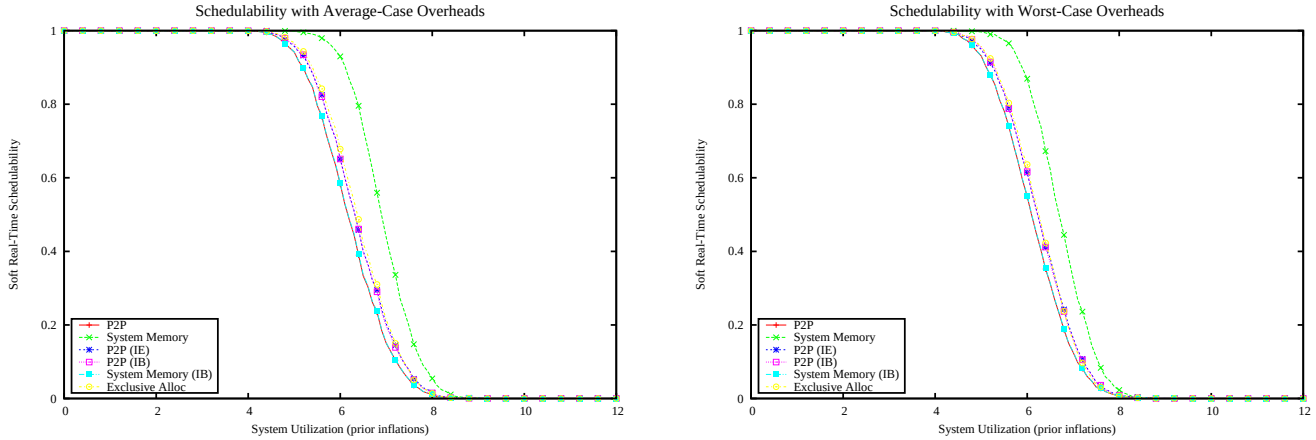

Figure 2023: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

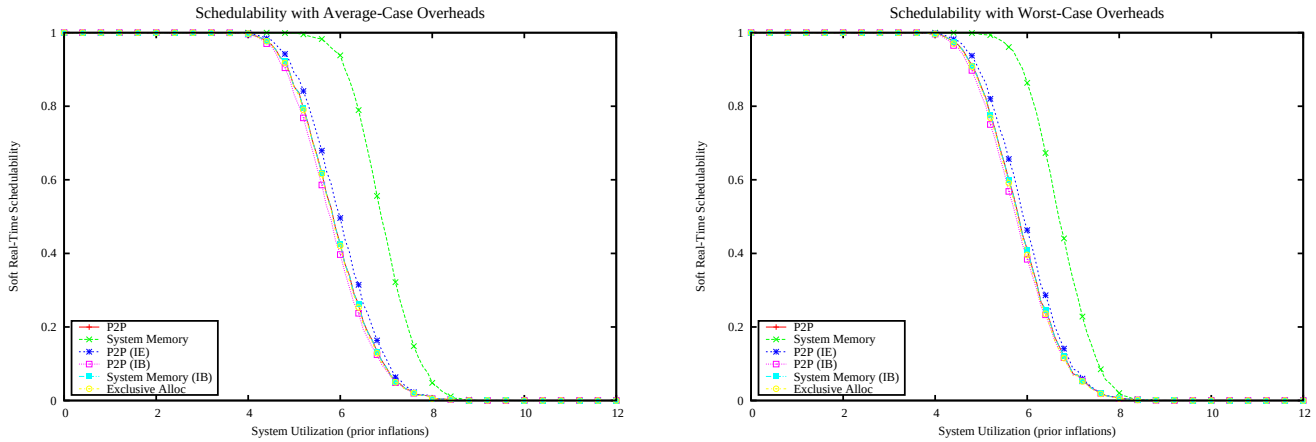

Figure 2024: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

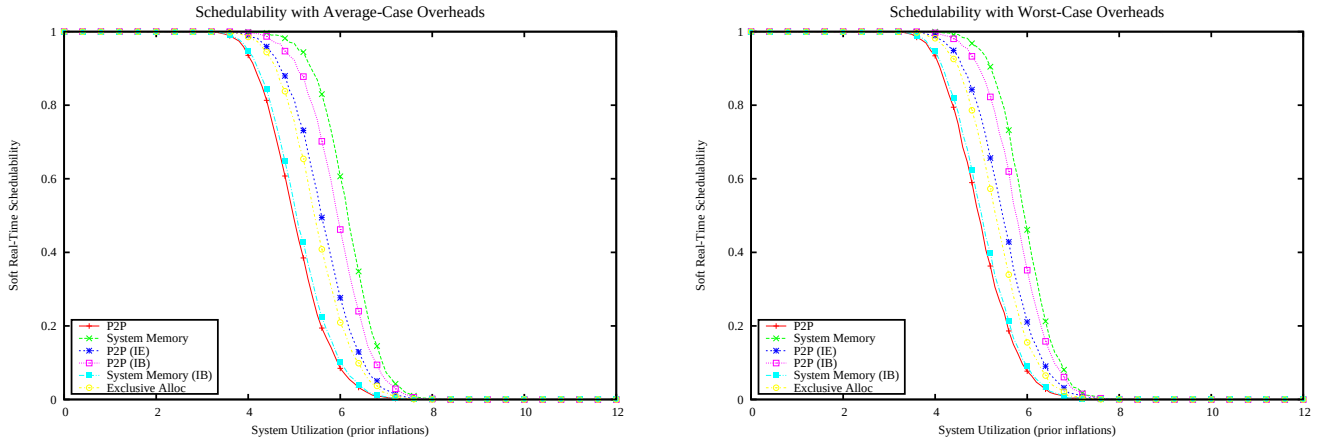

Figure 2025: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

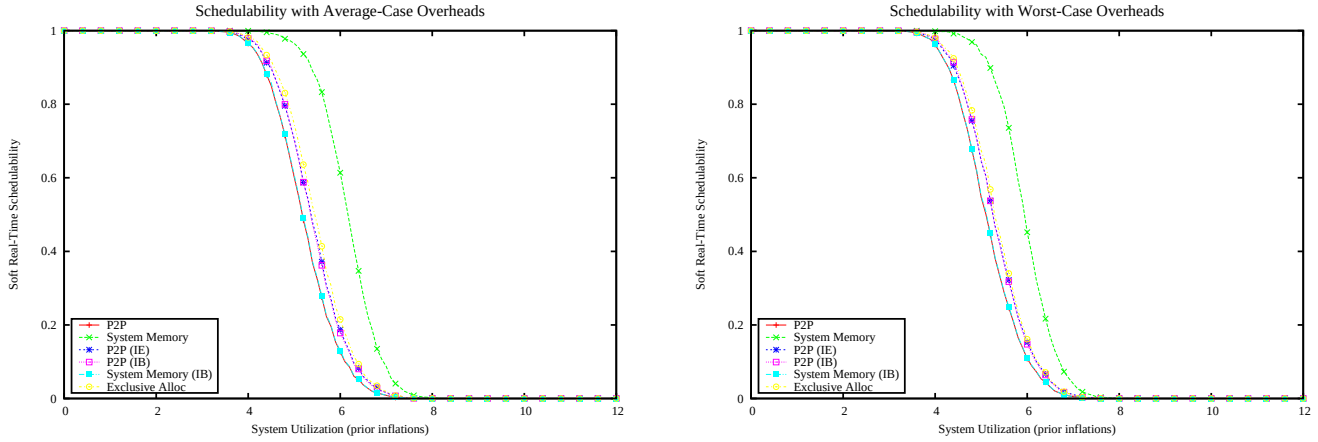

Figure 2026: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

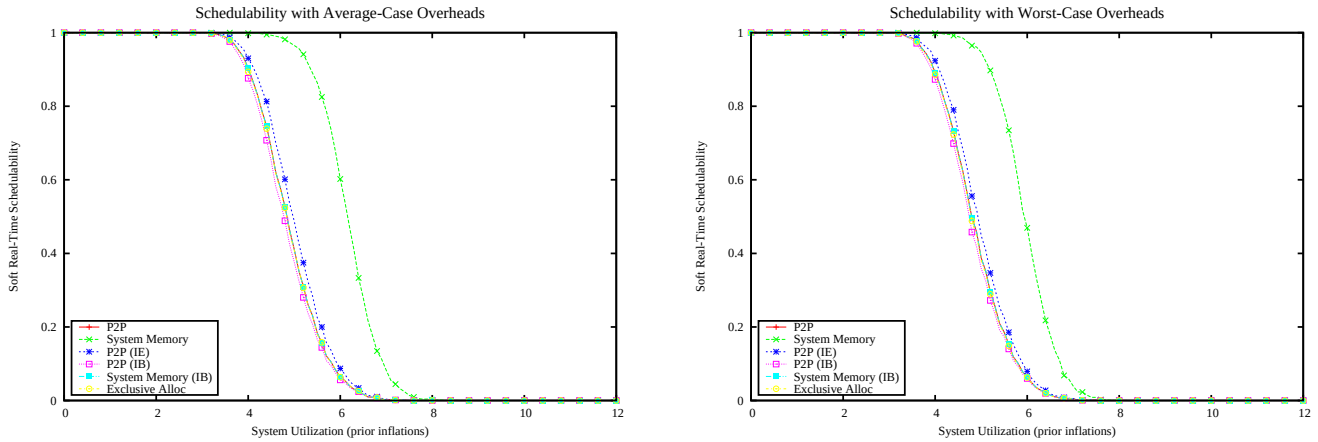

Figure 2027: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

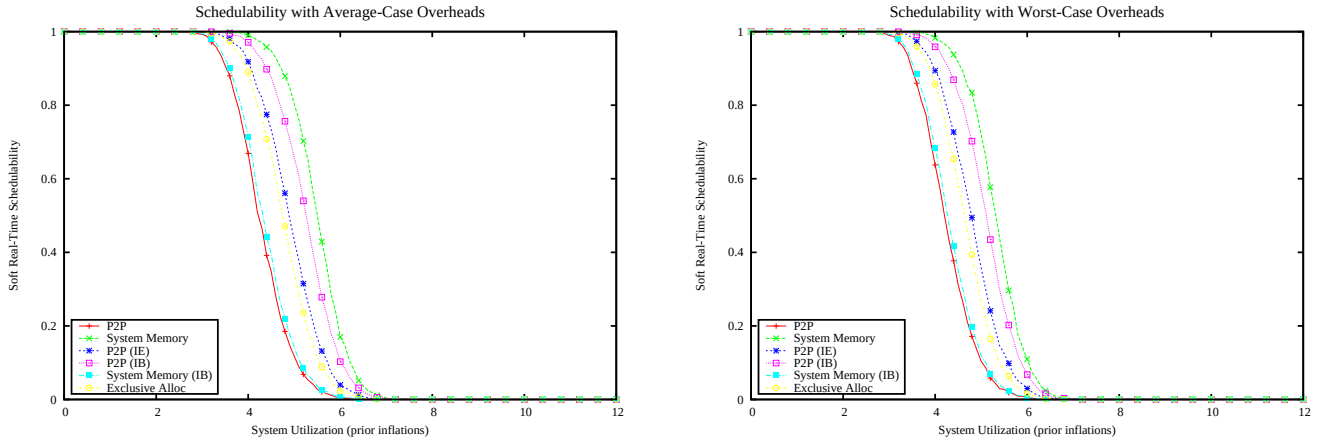

Figure 2028: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

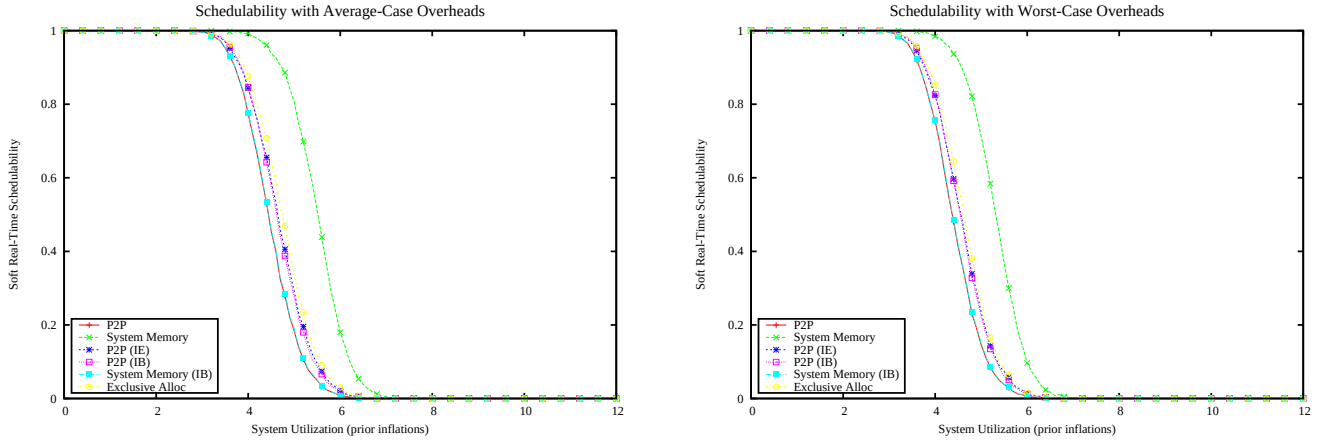

Figure 2029: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

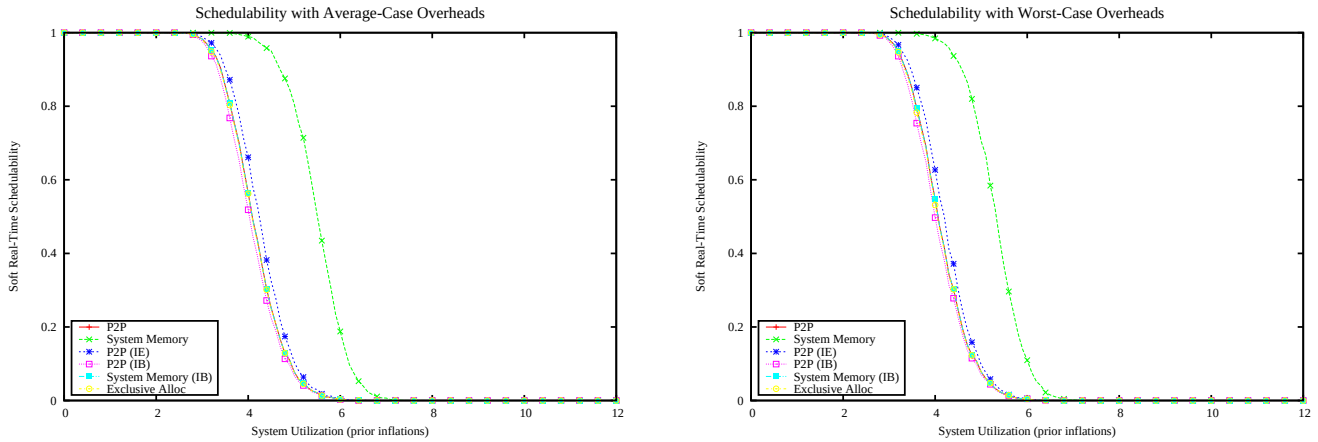

Figure 2030: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

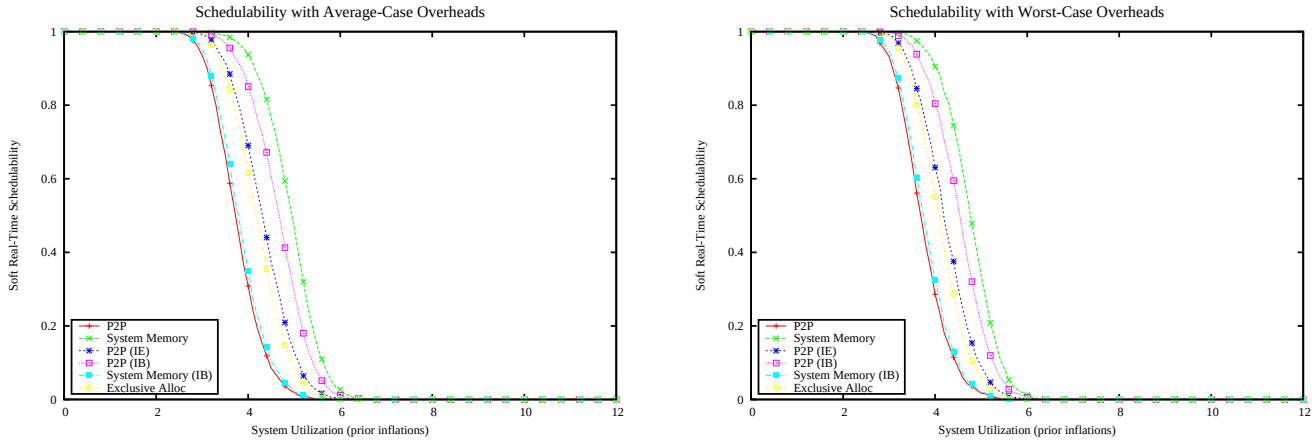

Figure 2031: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

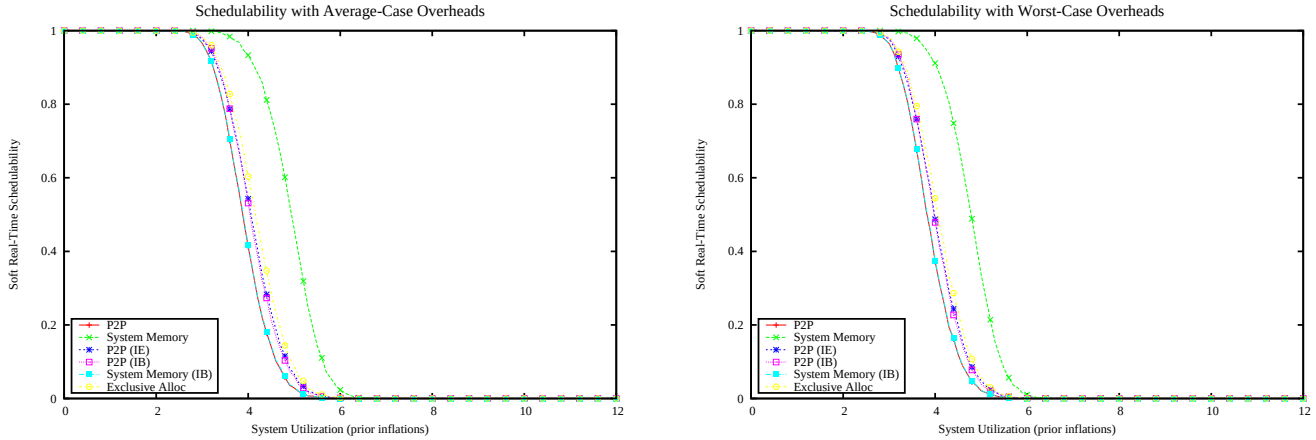

Figure 2032: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

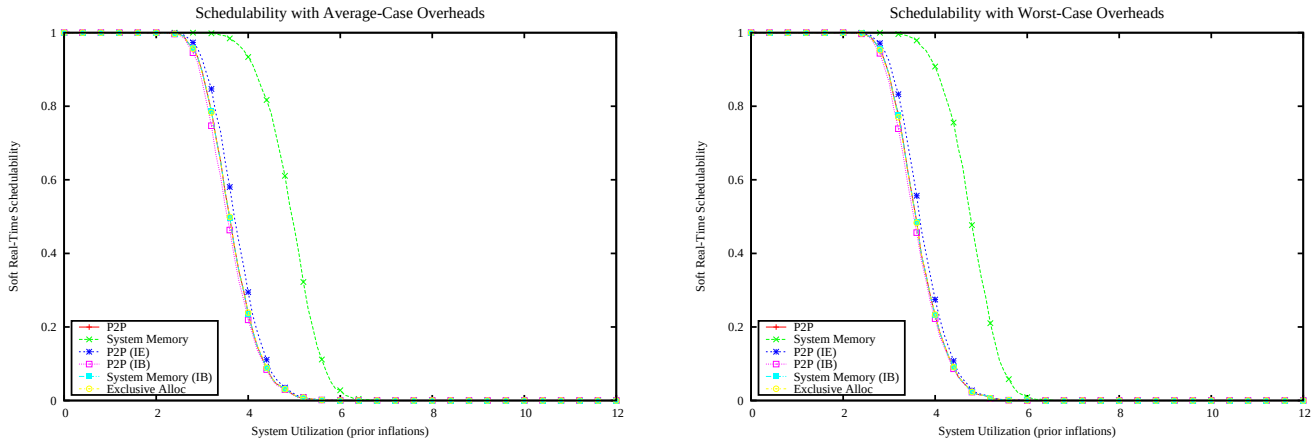

Figure 2033: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

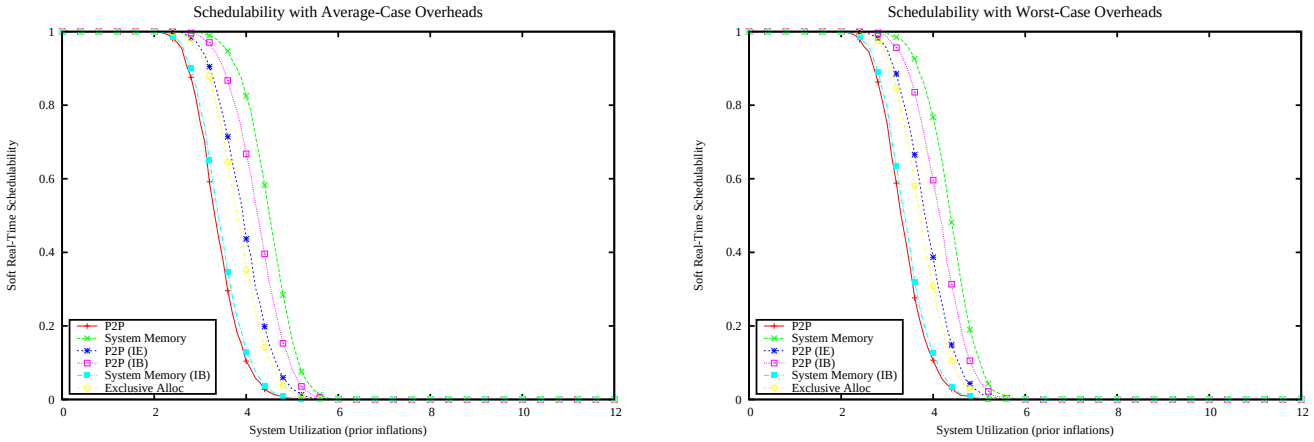

Figure 2034: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

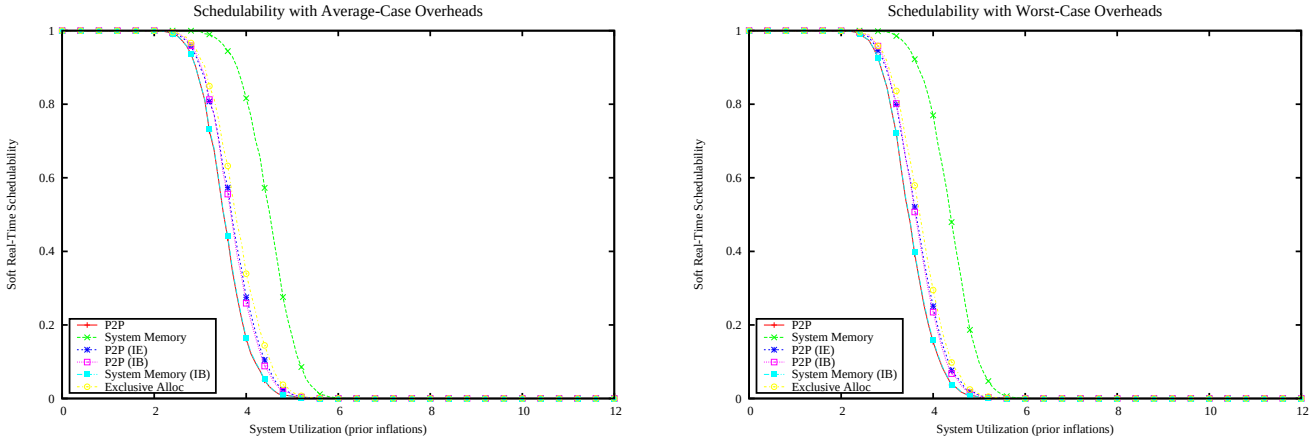

Figure 2035: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

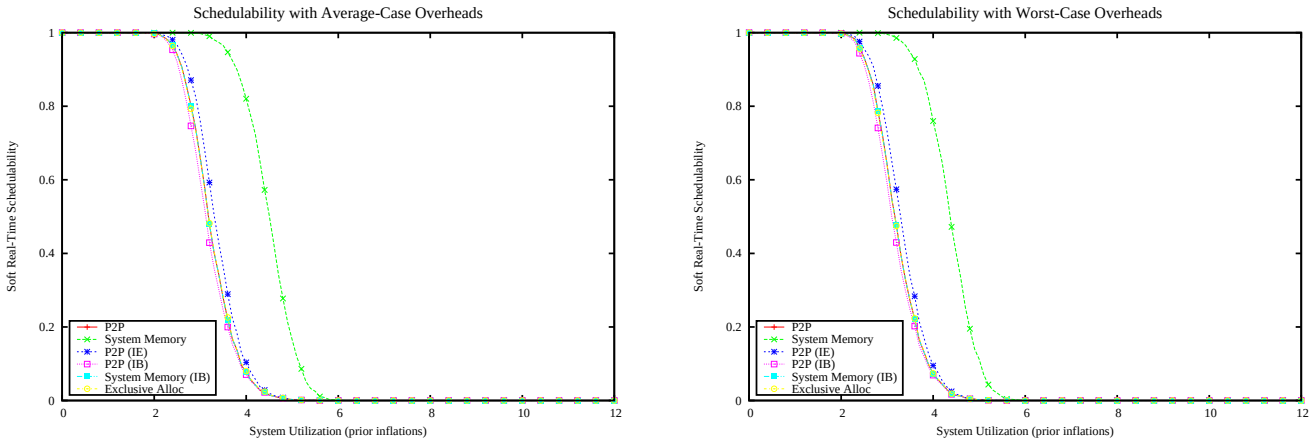

Figure 2036: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

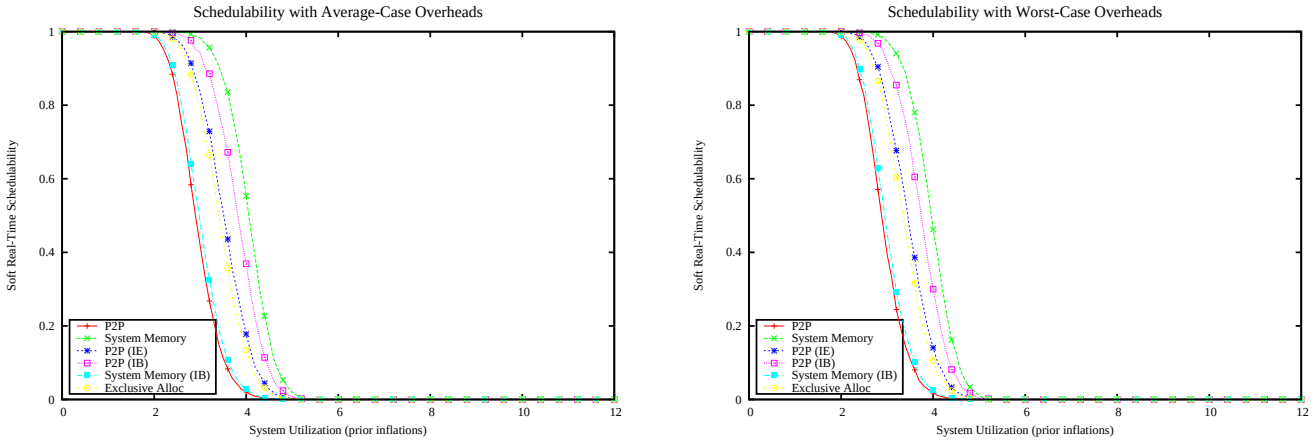

Figure 2037: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

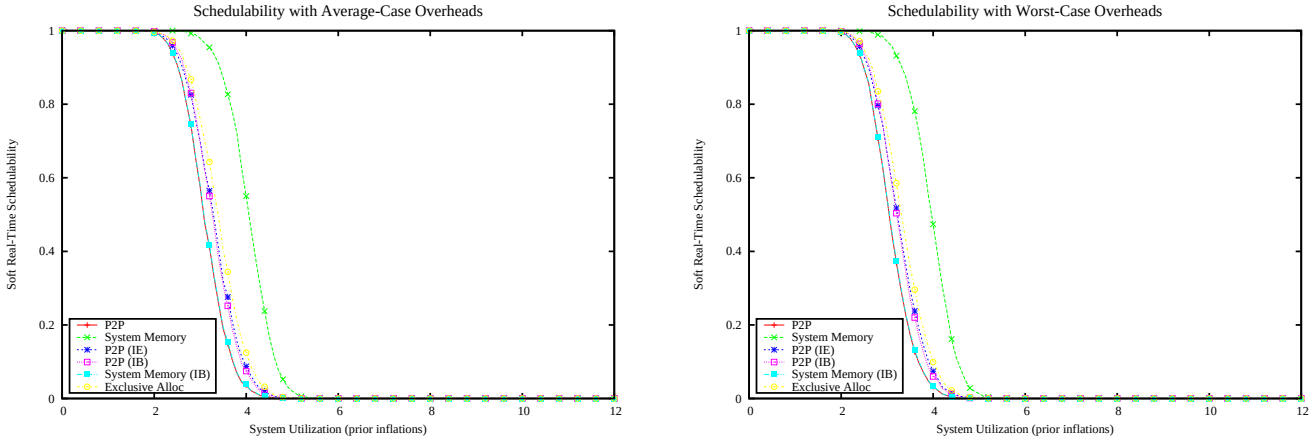

Figure 2038: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

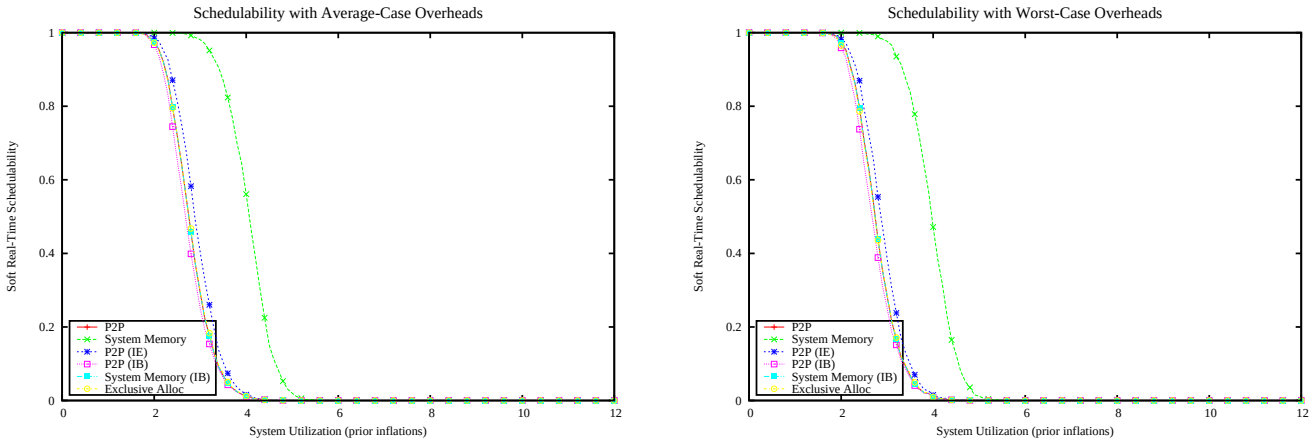

Figure 2039: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

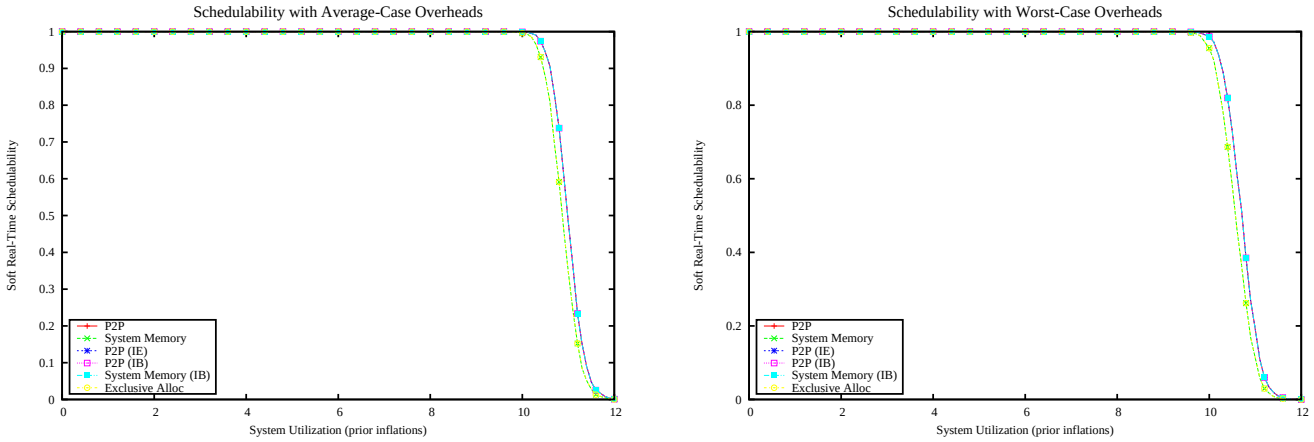

Figure 2040: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

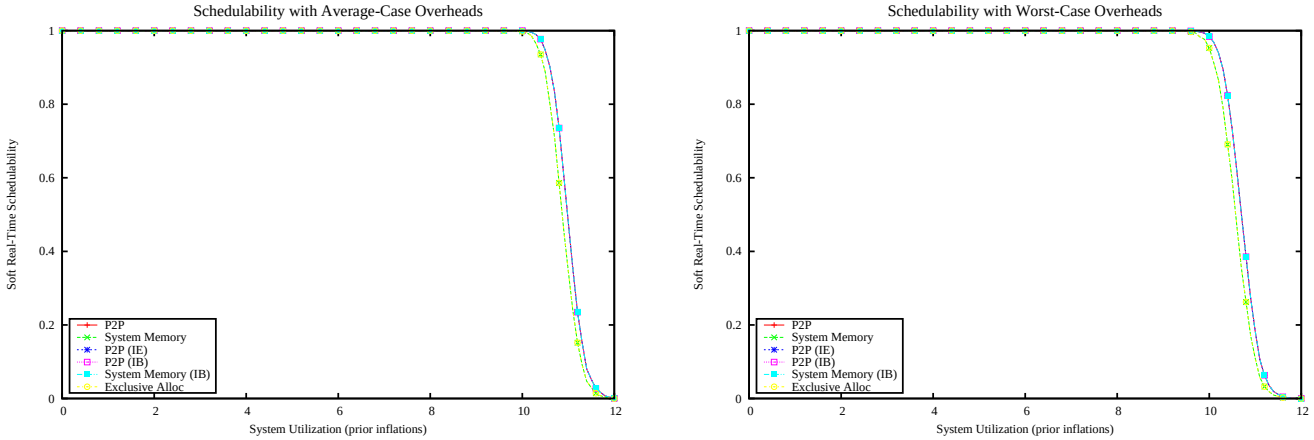

Figure 2041: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

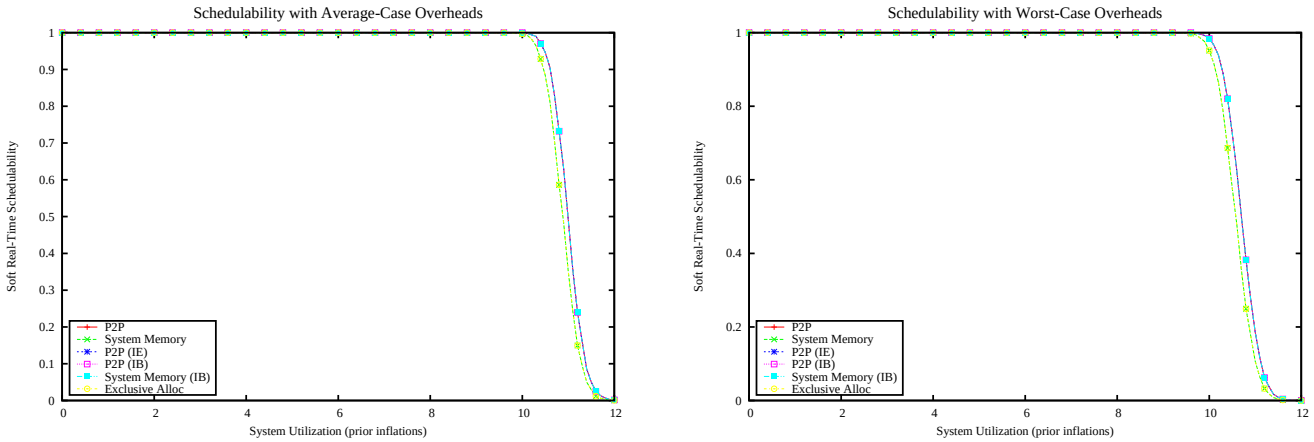

Figure 2042: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

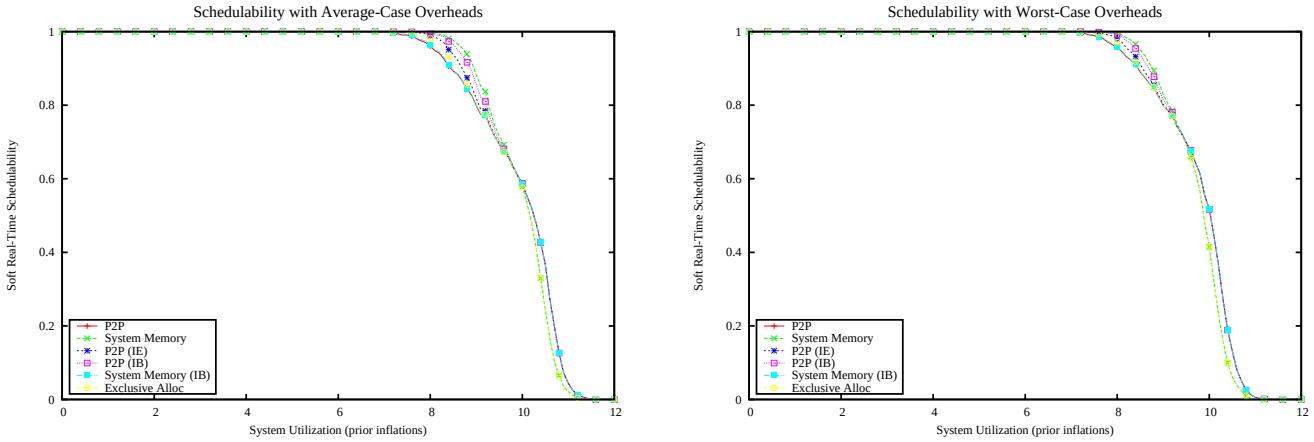

Figure 2043: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

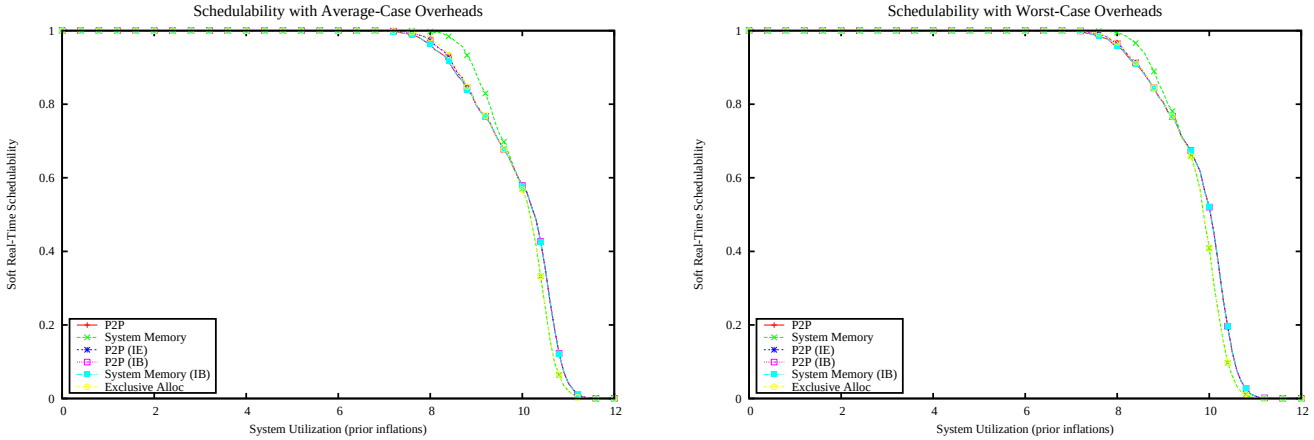

Figure 2044: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

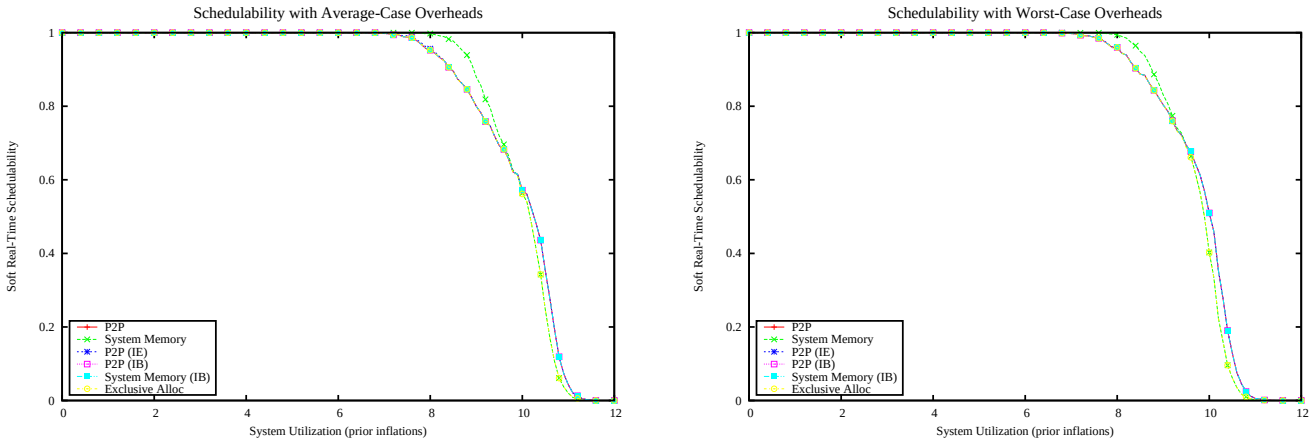

Figure 2045: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

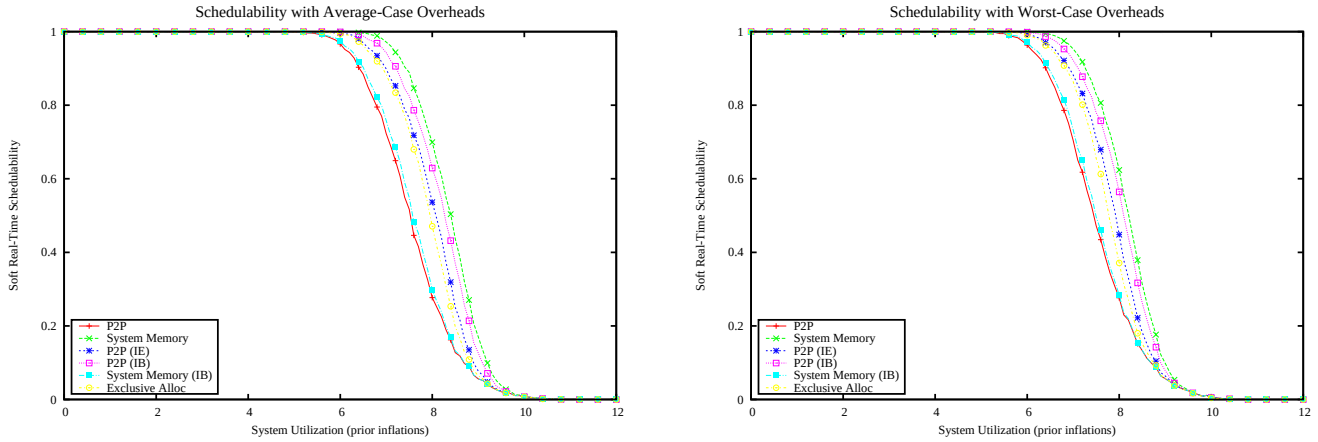

Figure 2046: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

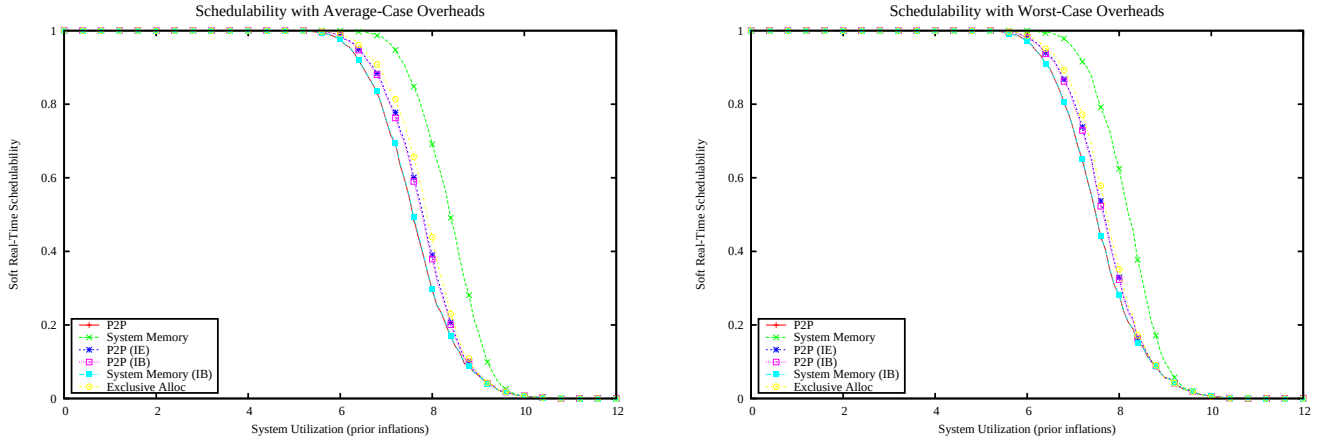

Figure 2047: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

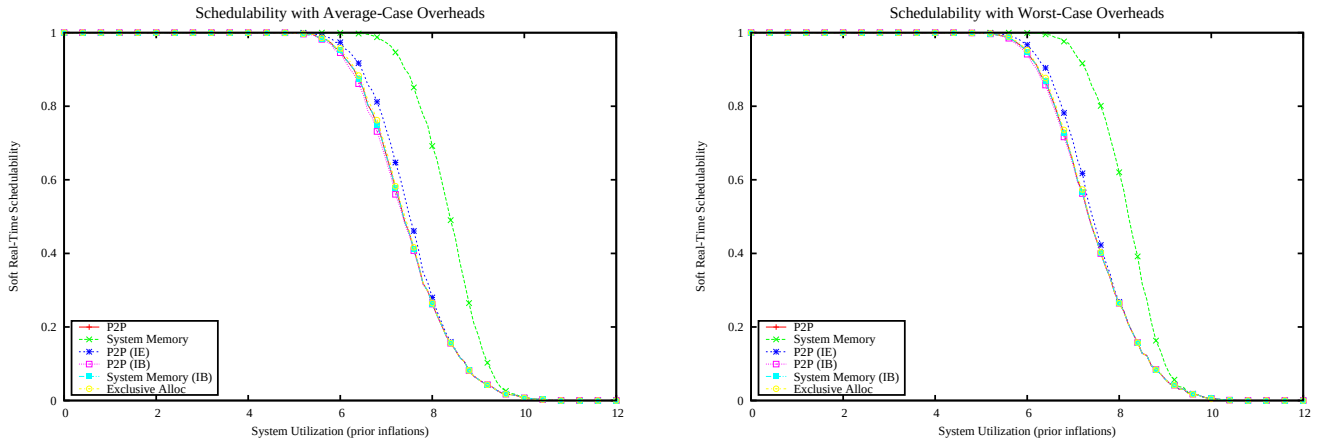

Figure 2048: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

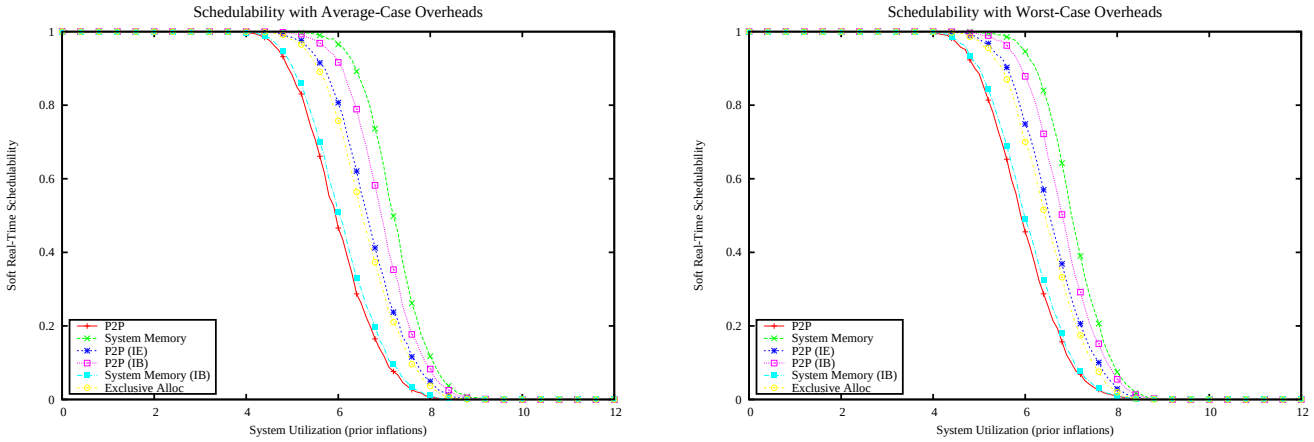

Figure 2049: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

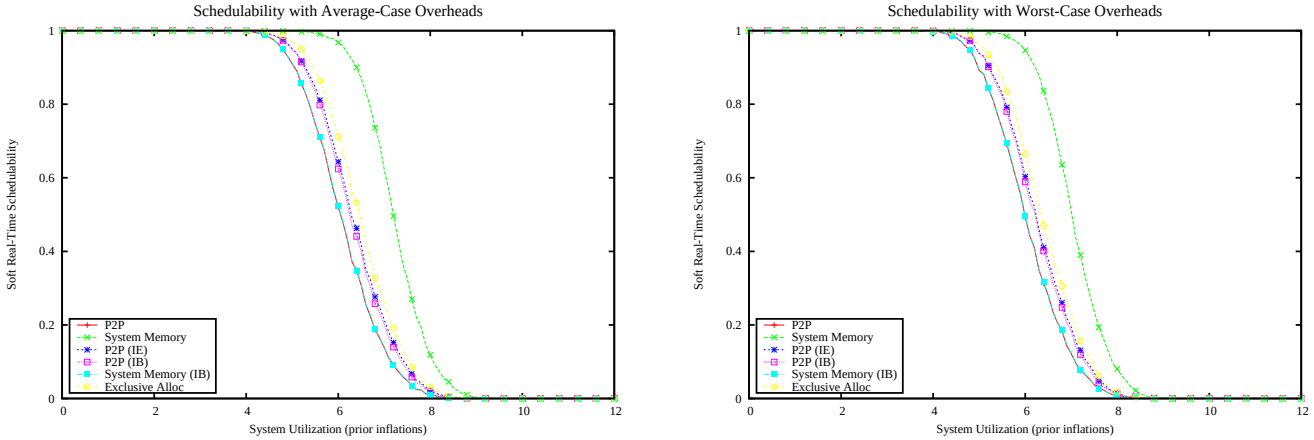

Figure 2050: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

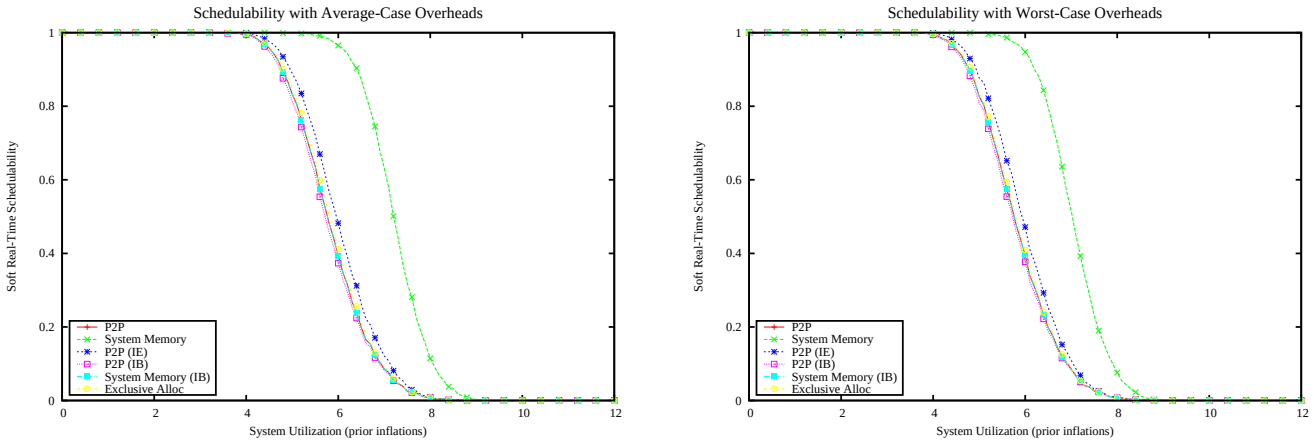

Figure 2051: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

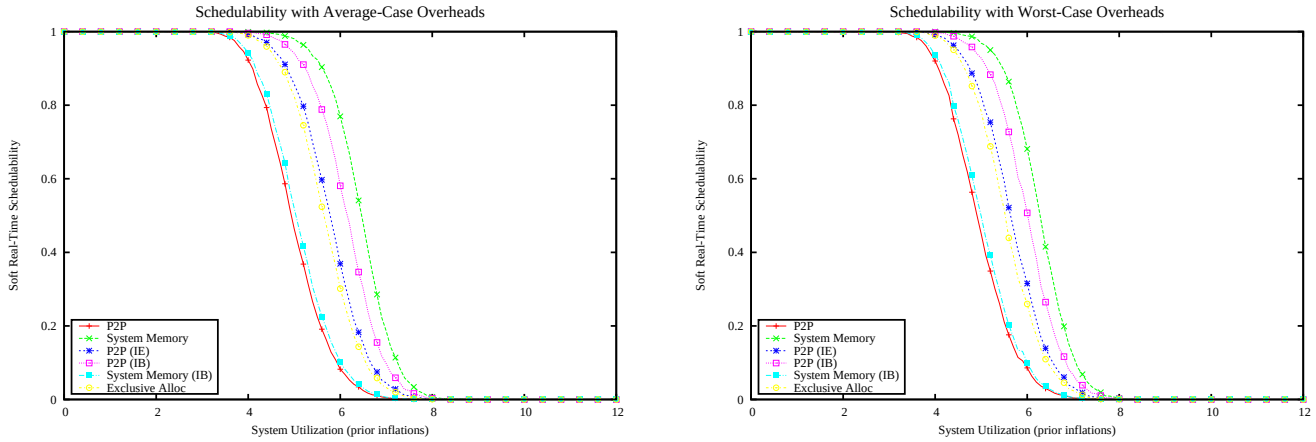

Figure 2052: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

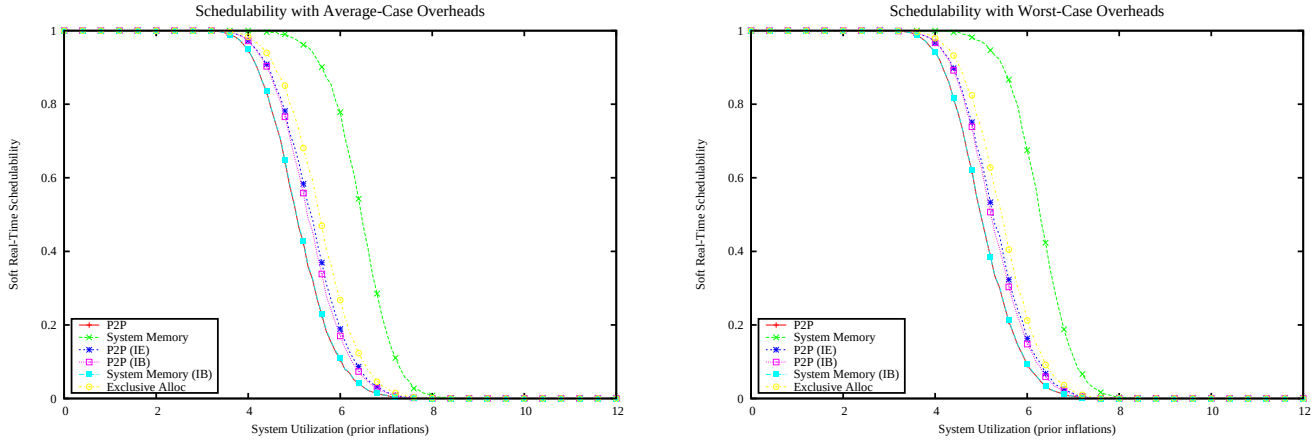

Figure 2053: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

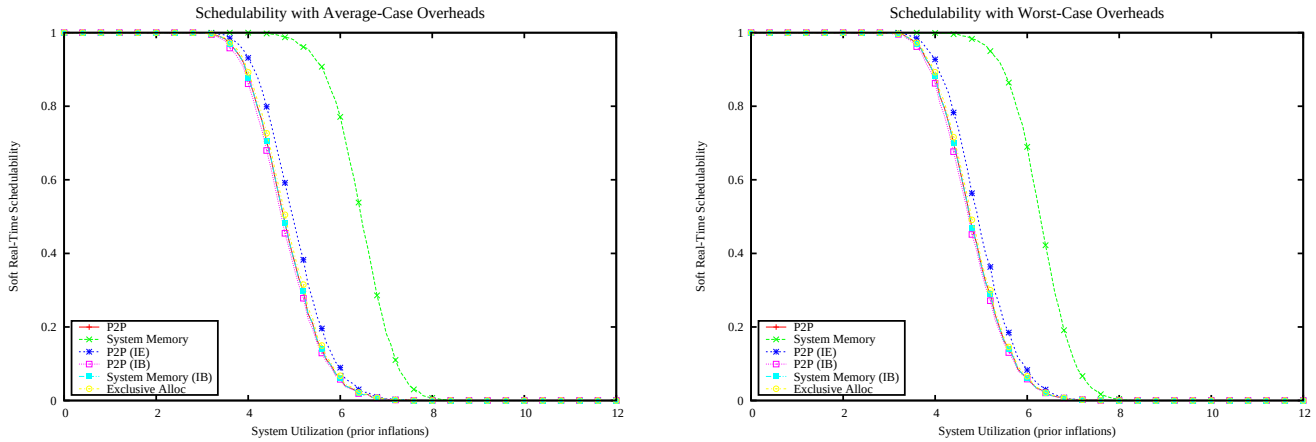

Figure 2054: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

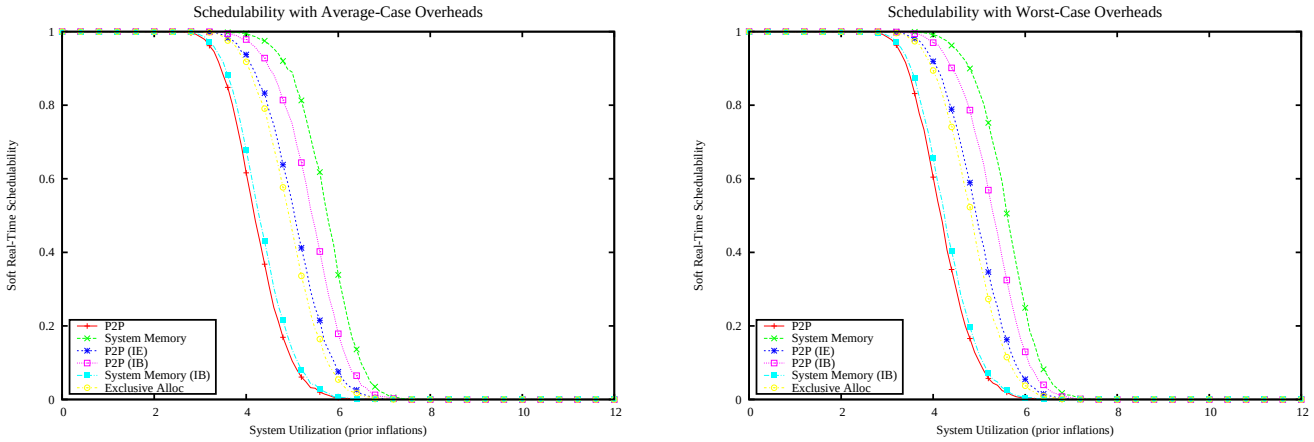

Figure 2055: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

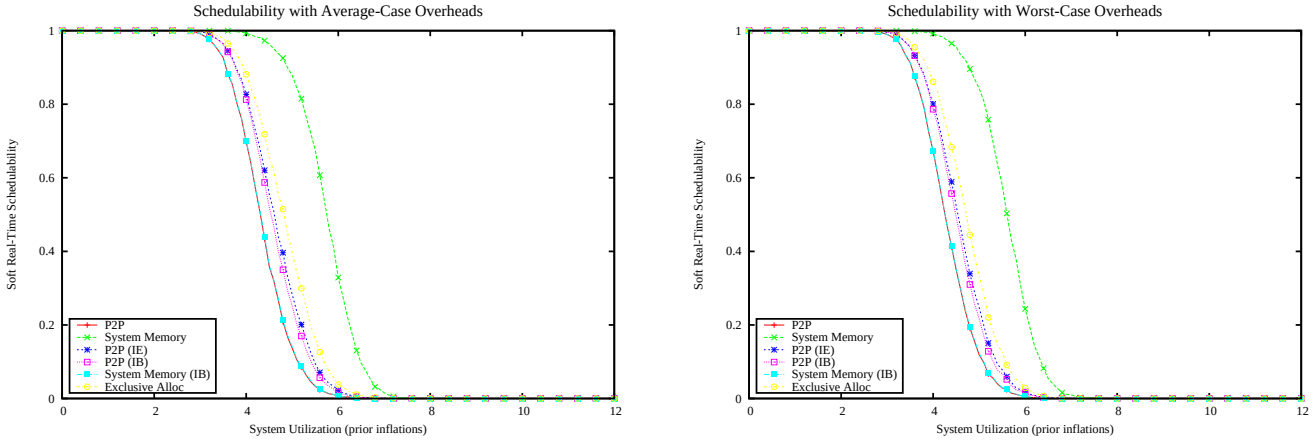

Figure 2056: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

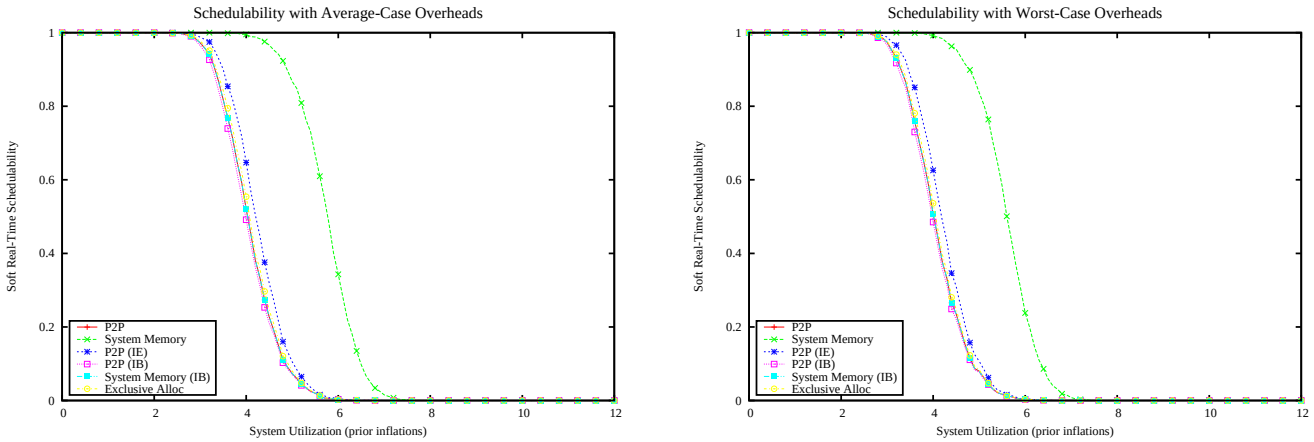

Figure 2057: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

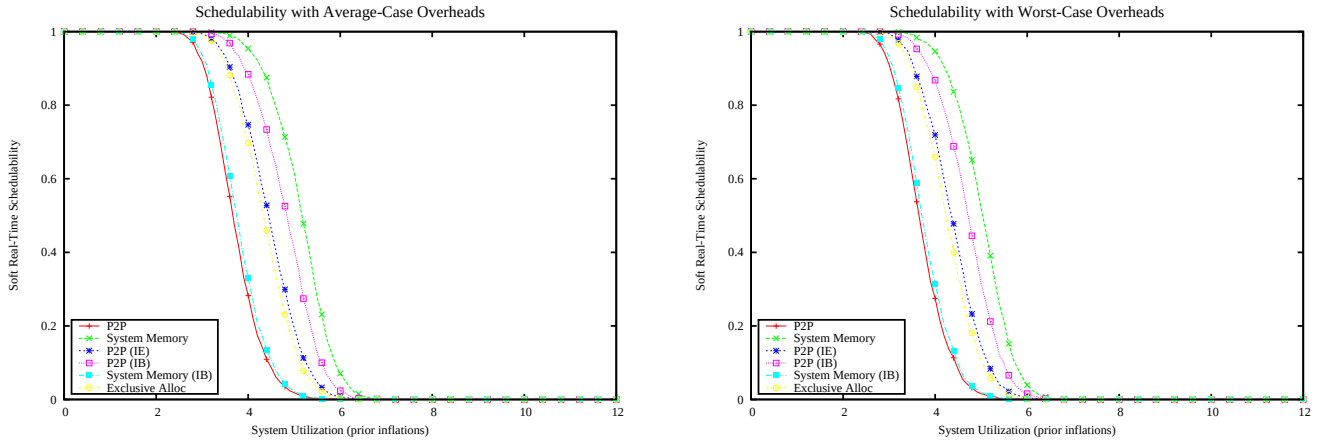

Figure 2058: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

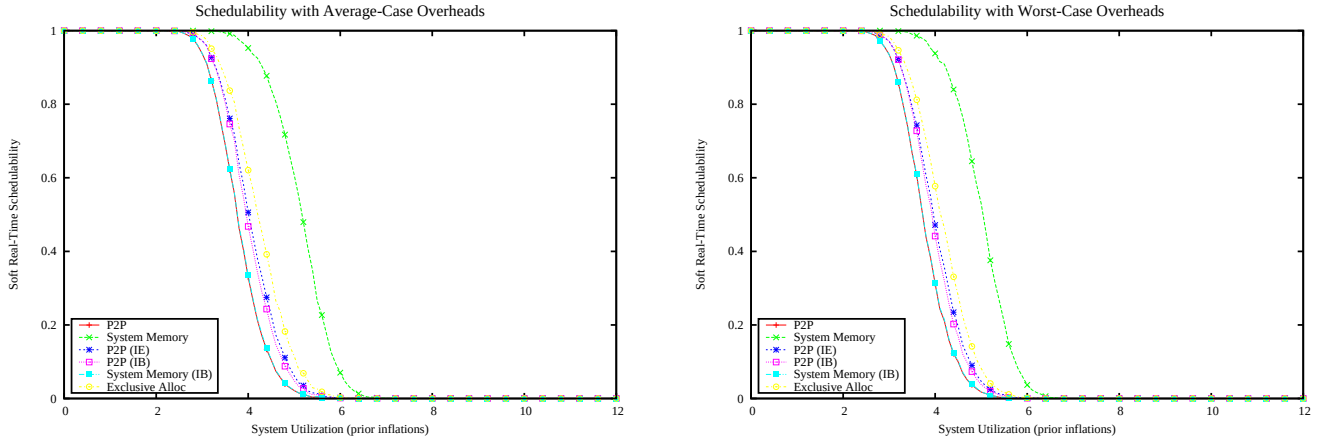

Figure 2059: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

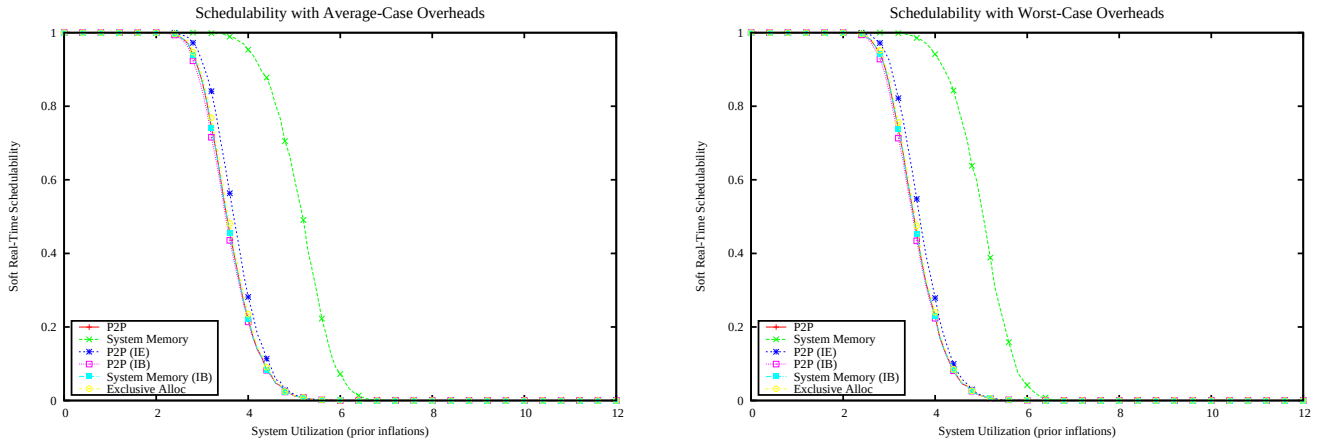

Figure 2060: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

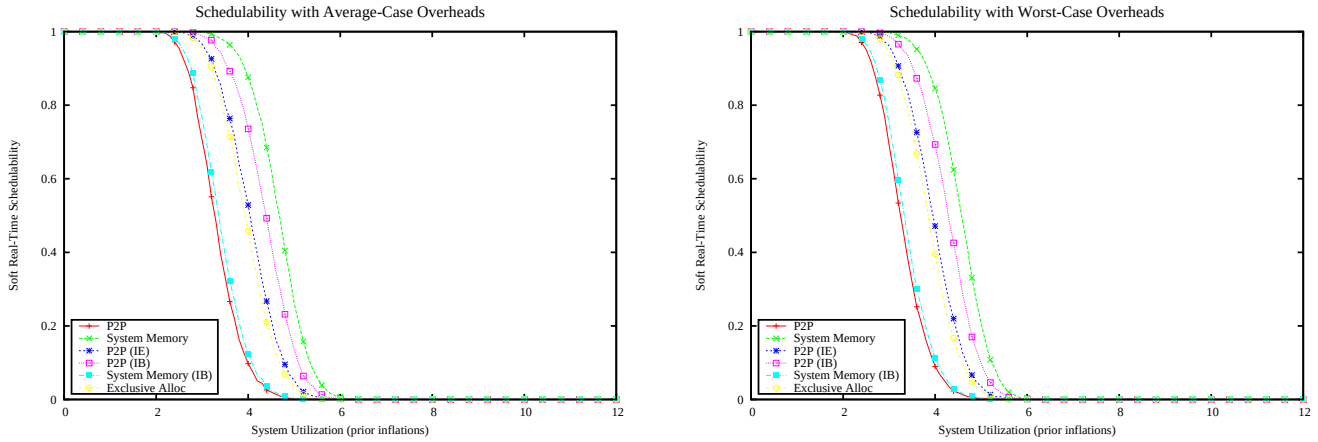

Figure 2061: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

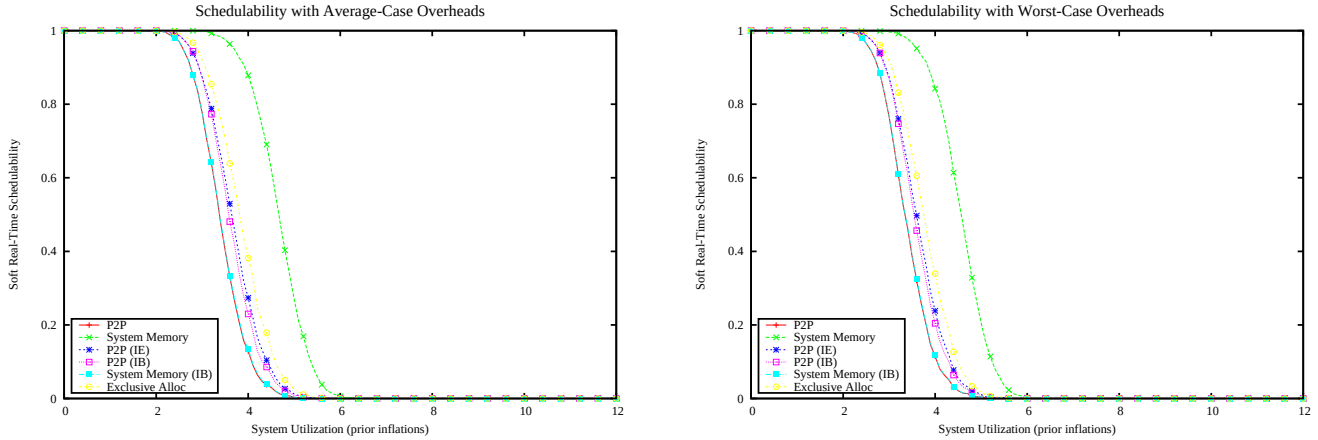

Figure 2062: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

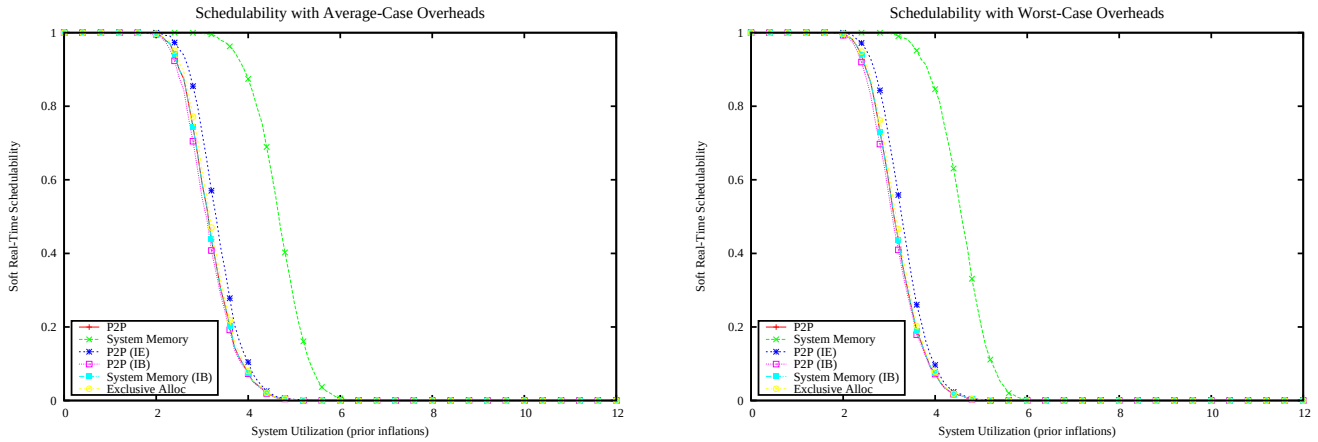

Figure 2063: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

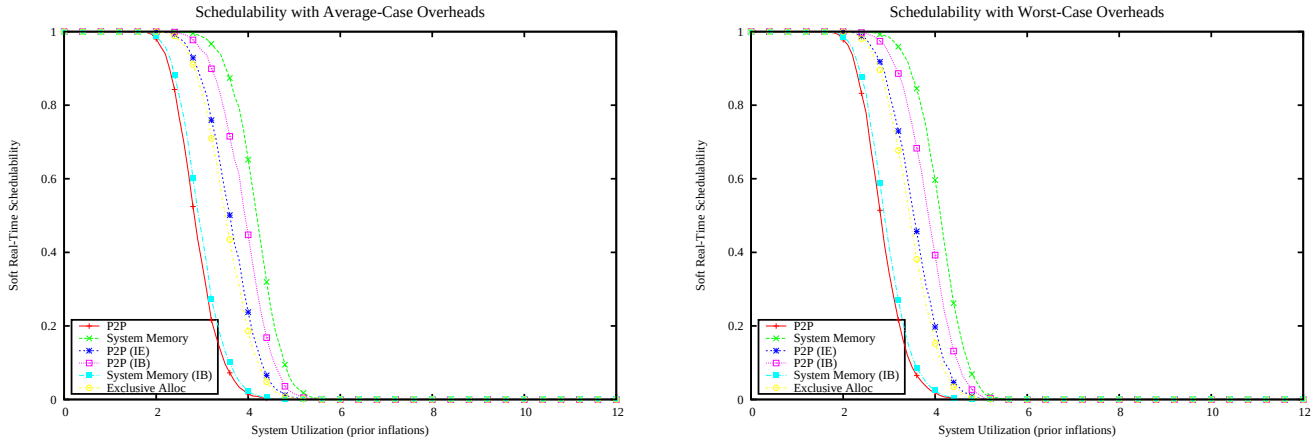

Figure 2064: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

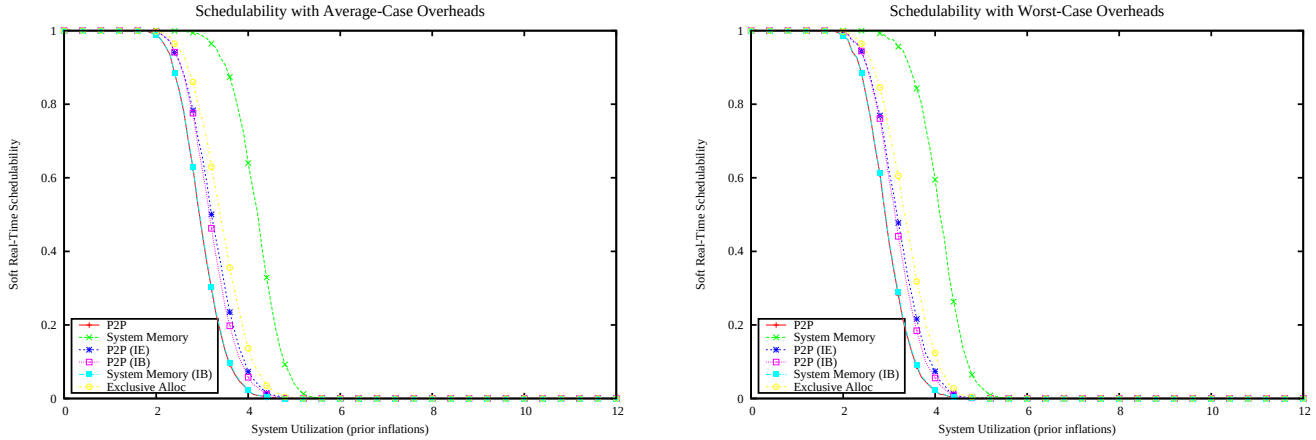

Figure 2065: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

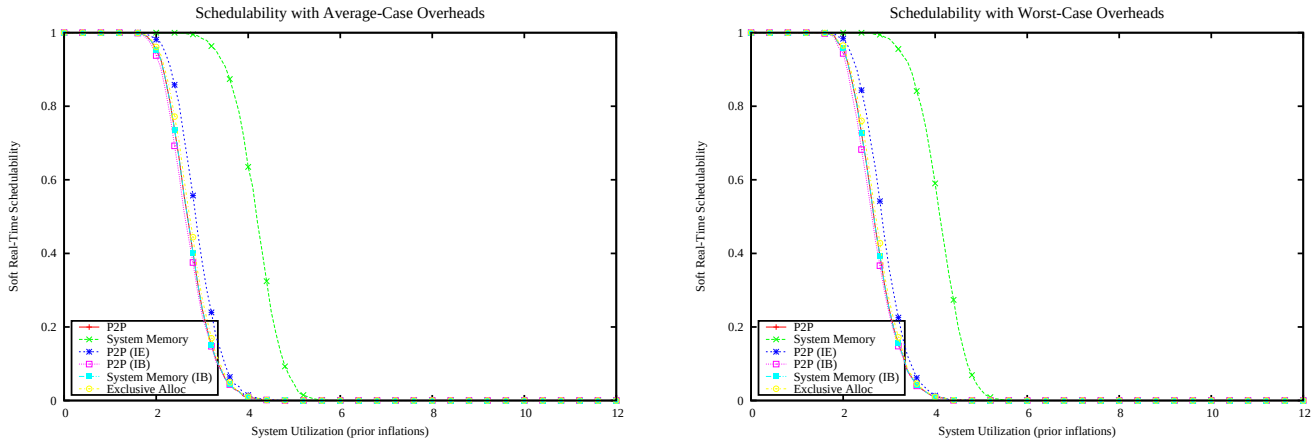

Figure 2066: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

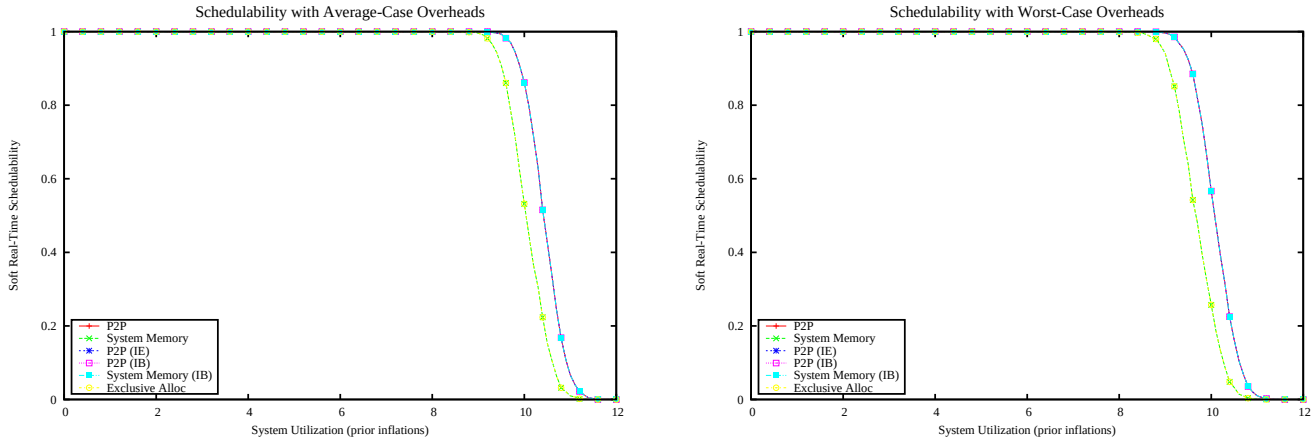

Figure 2067: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

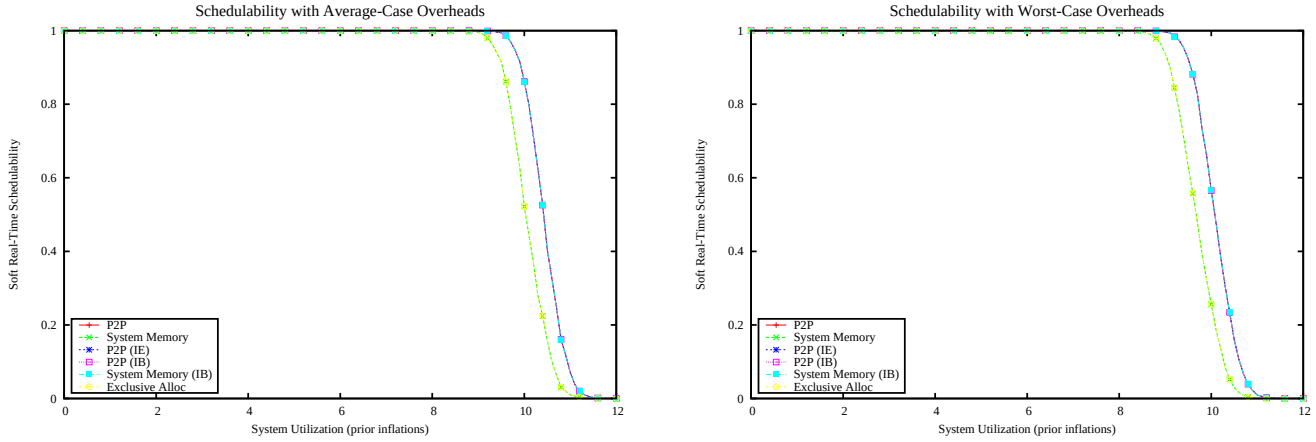

Figure 2068: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

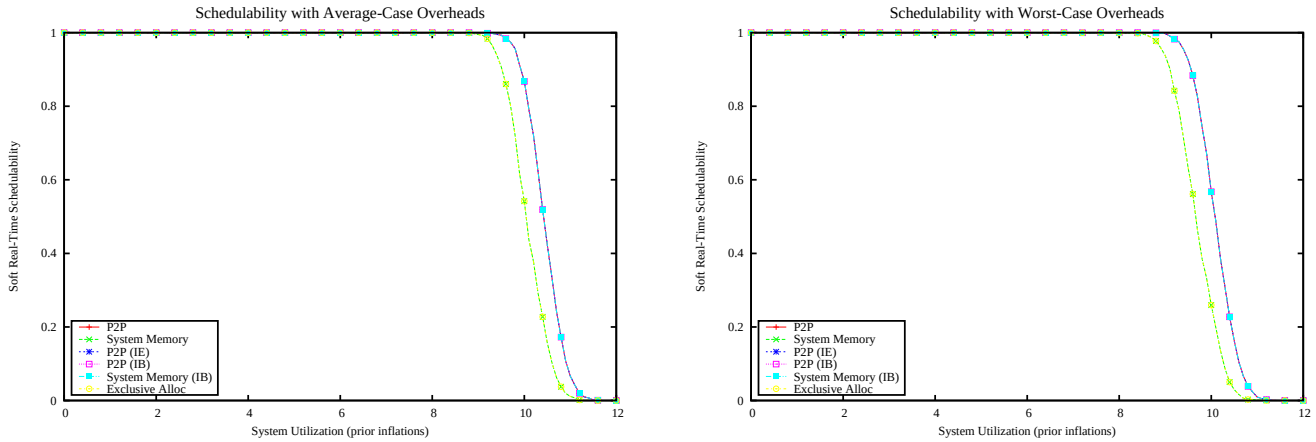

Figure 2069: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

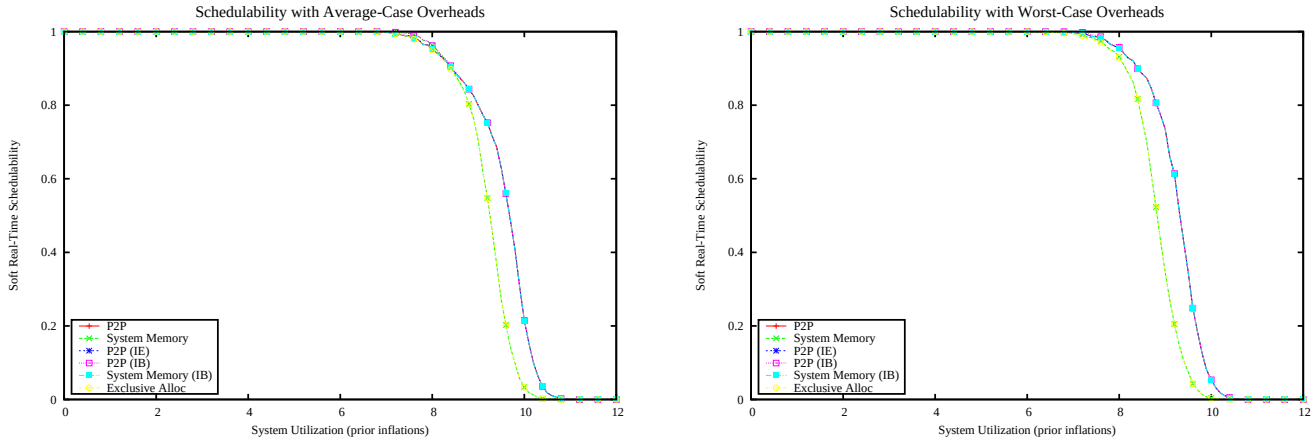

Figure 2070: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

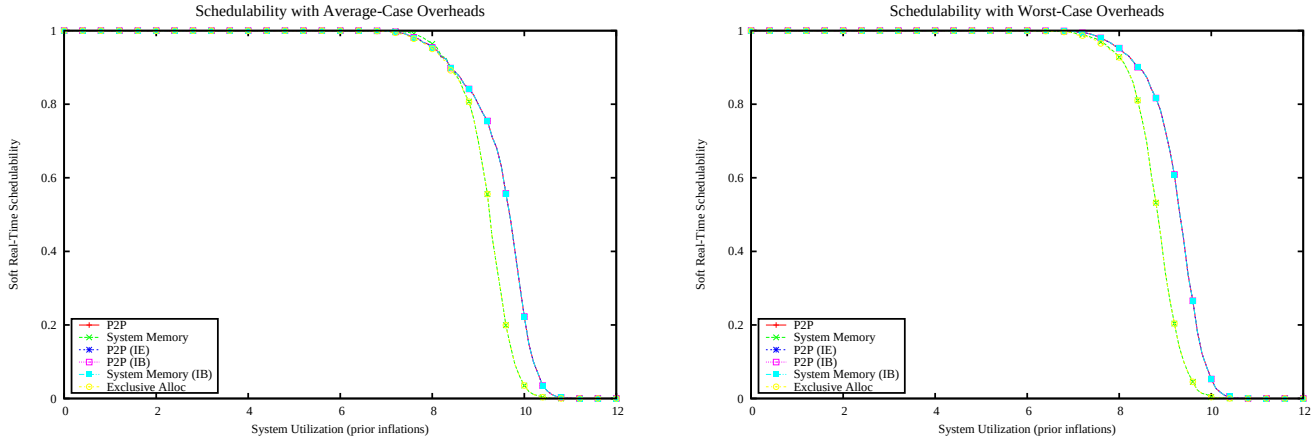

Figure 2071: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

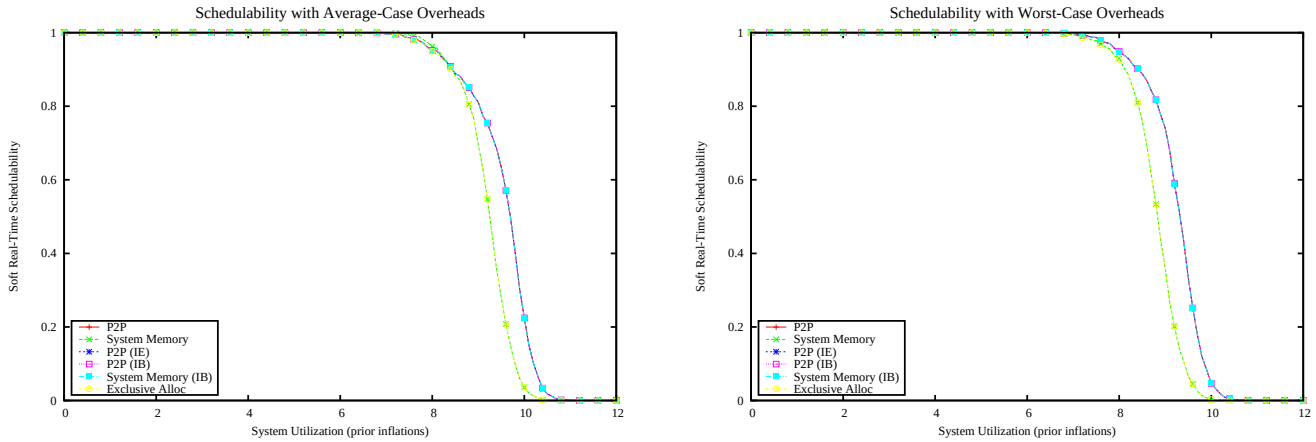

Figure 2072: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

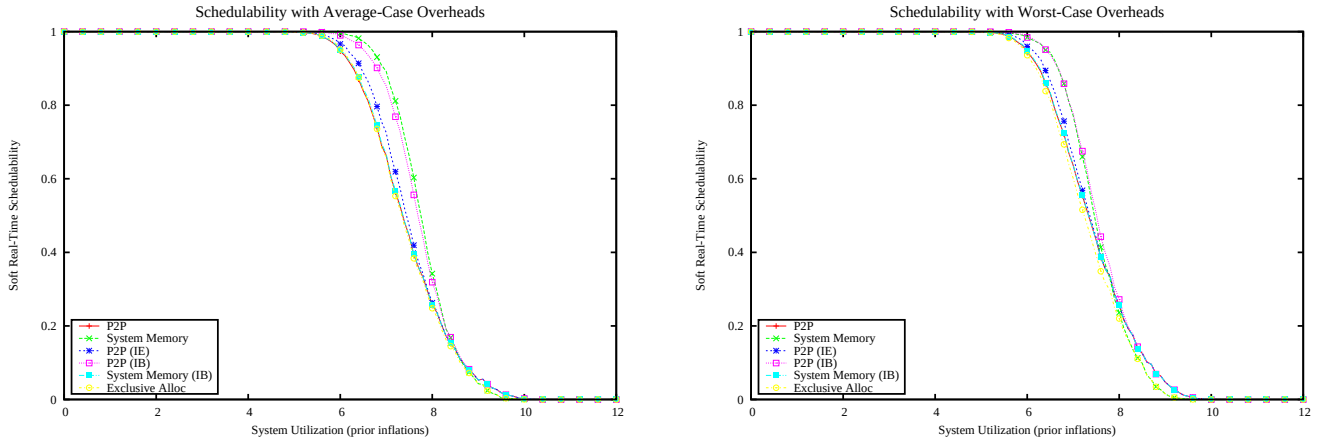

Figure 2073: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

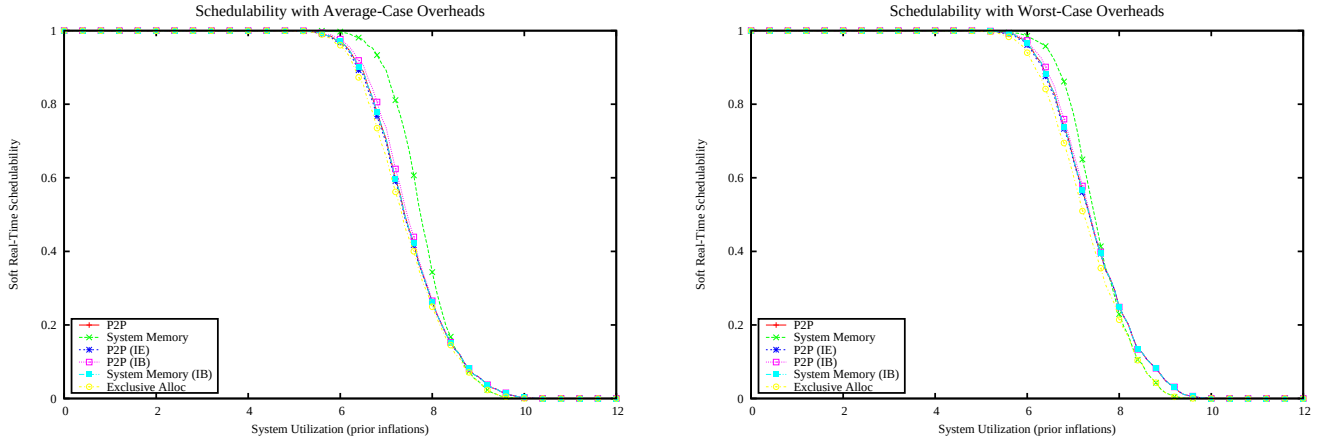

Figure 2074: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

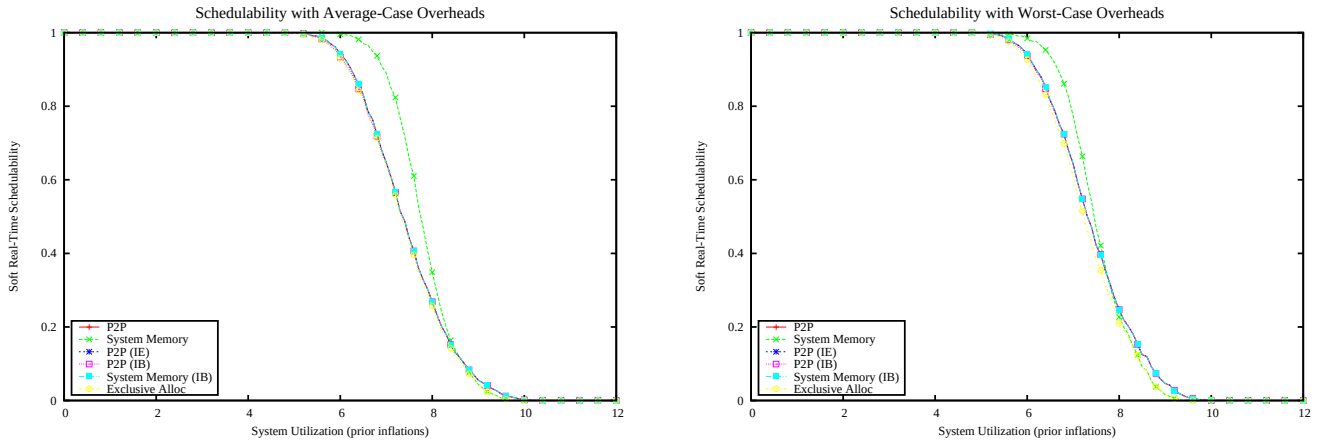

Figure 2075: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

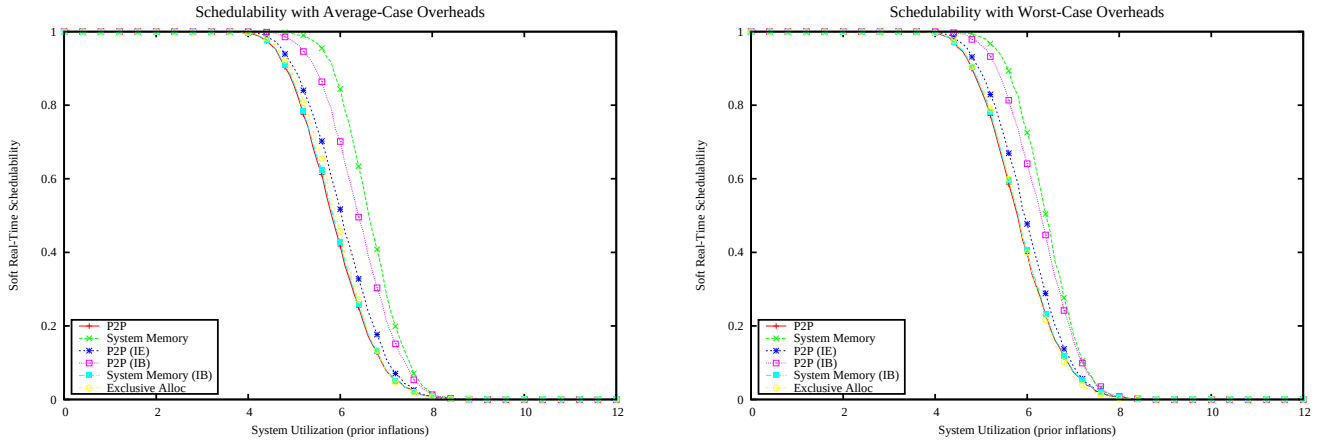

Figure 2076: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

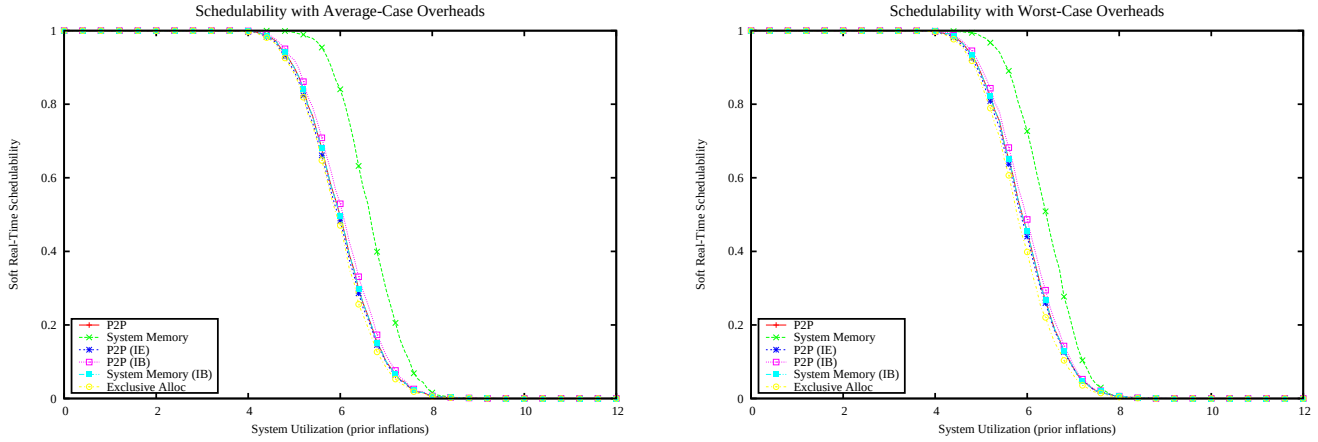

Figure 2077: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

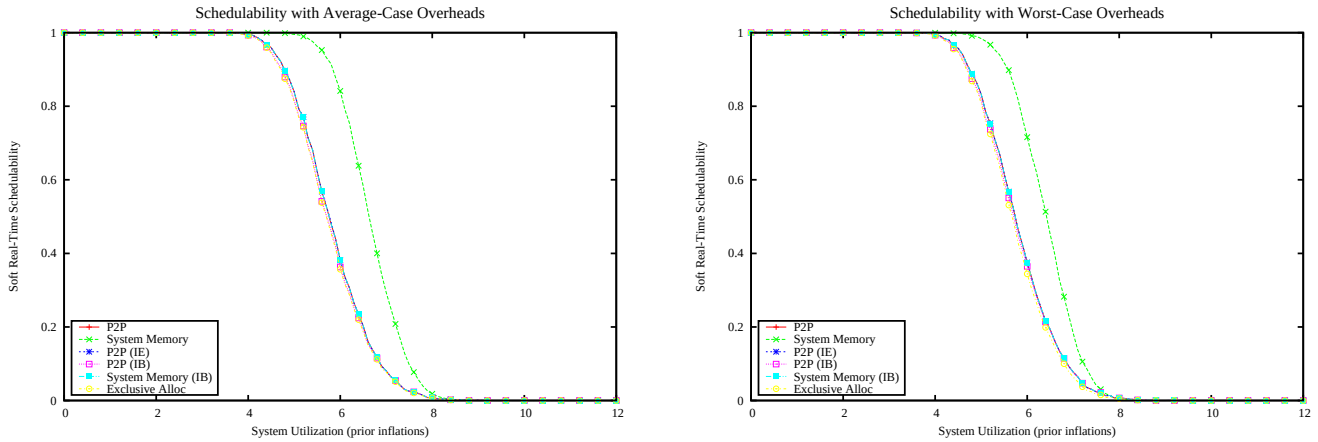

Figure 2078: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

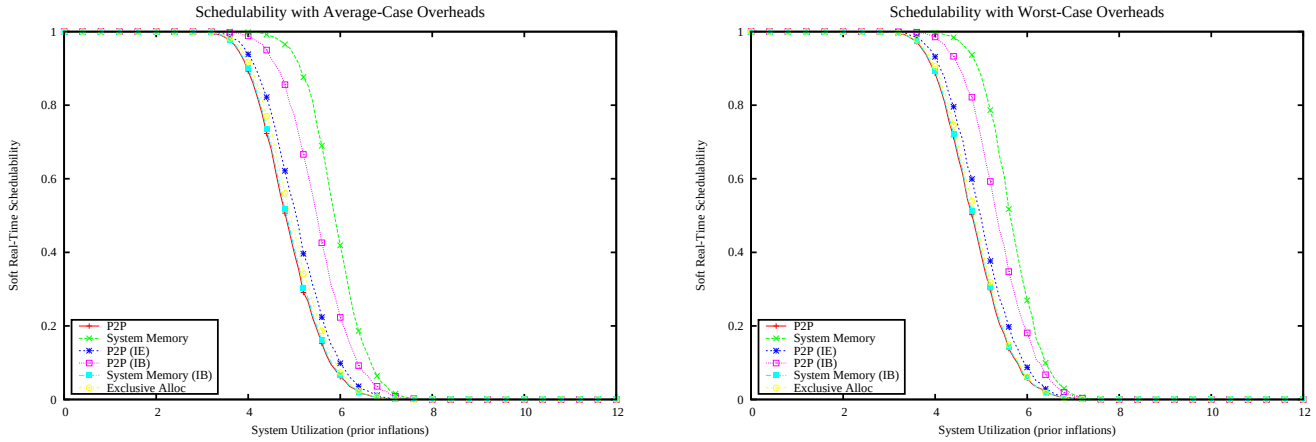

Figure 2079: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

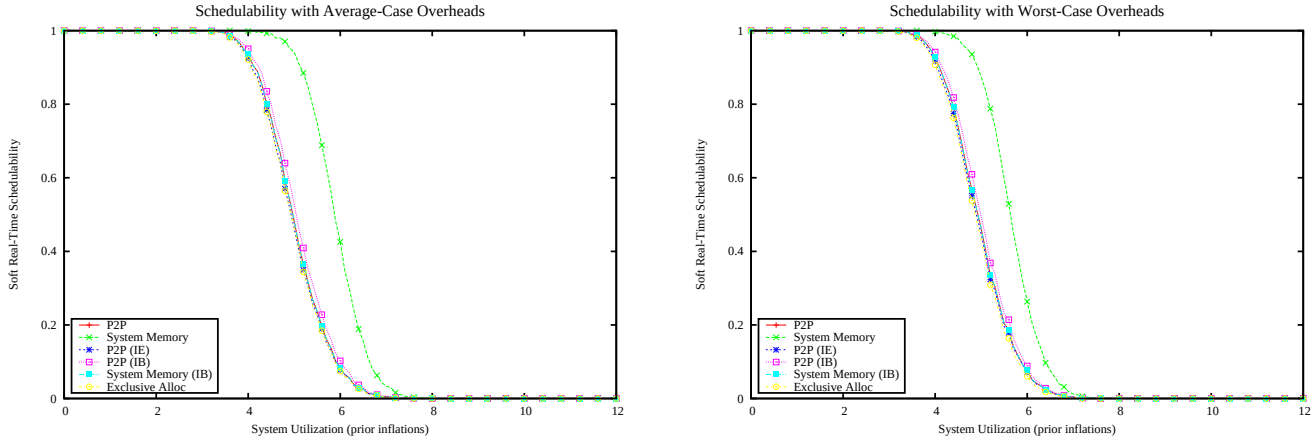

Figure 2080: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

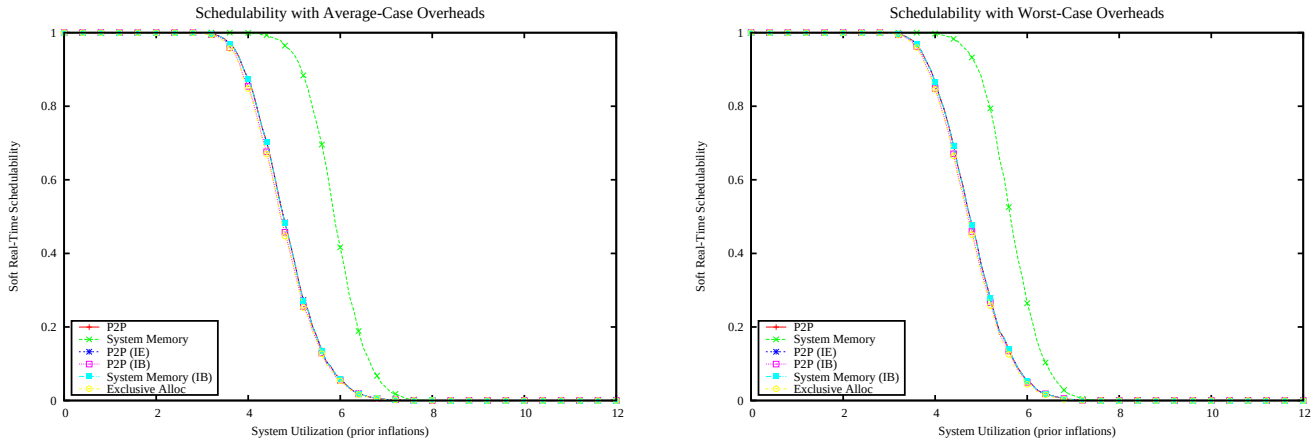

Figure 2081: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

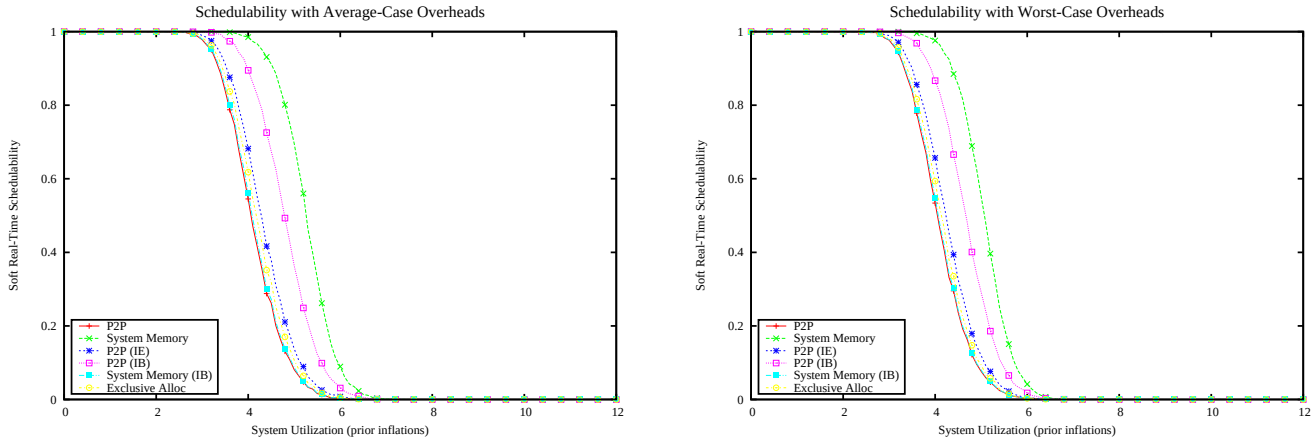

Figure 2082: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

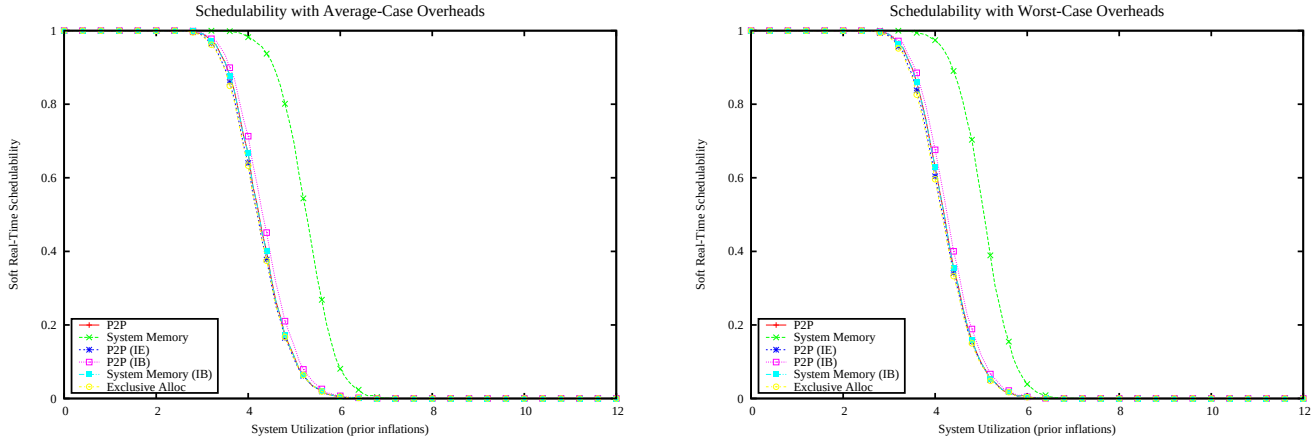

Figure 2083: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

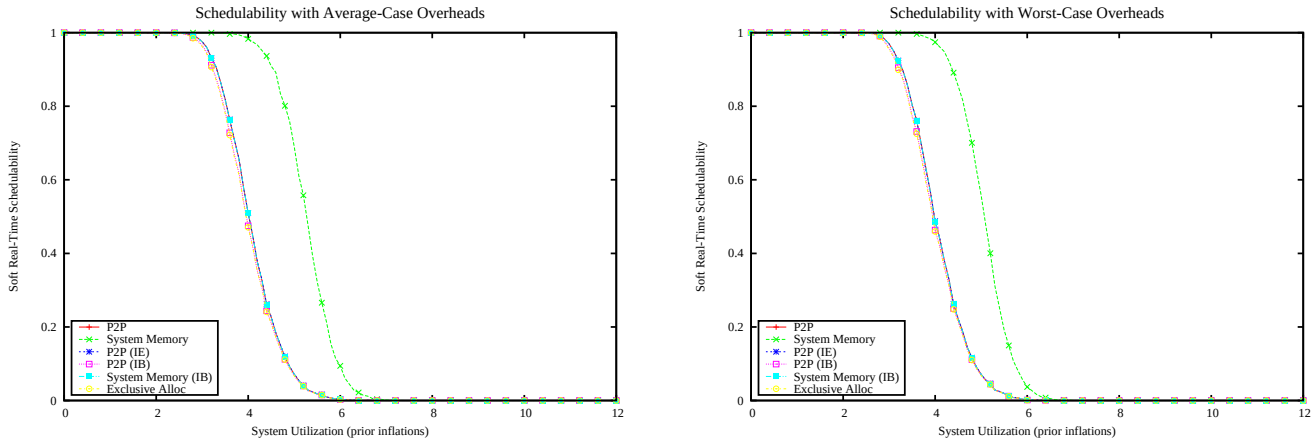

Figure 2084: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

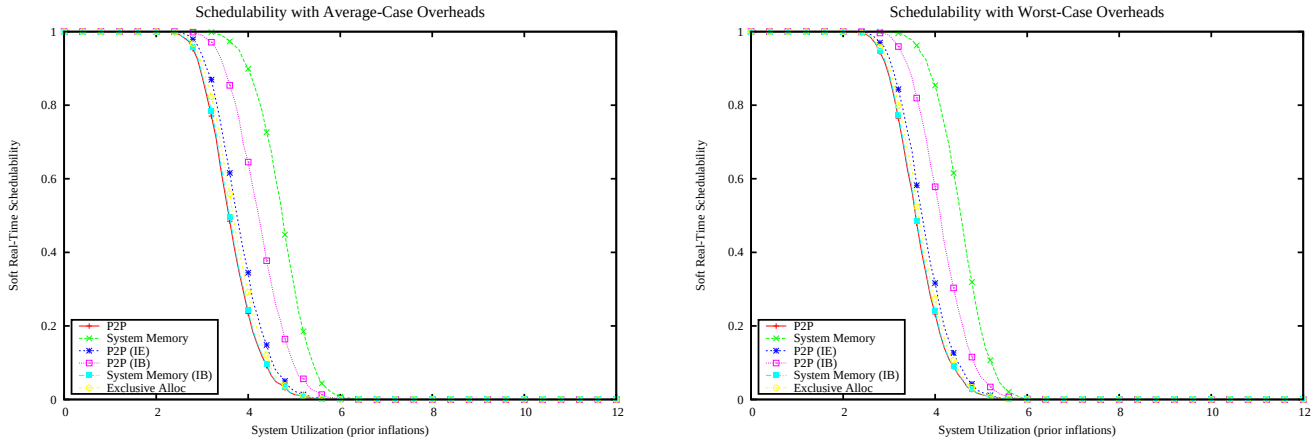

Figure 2085: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

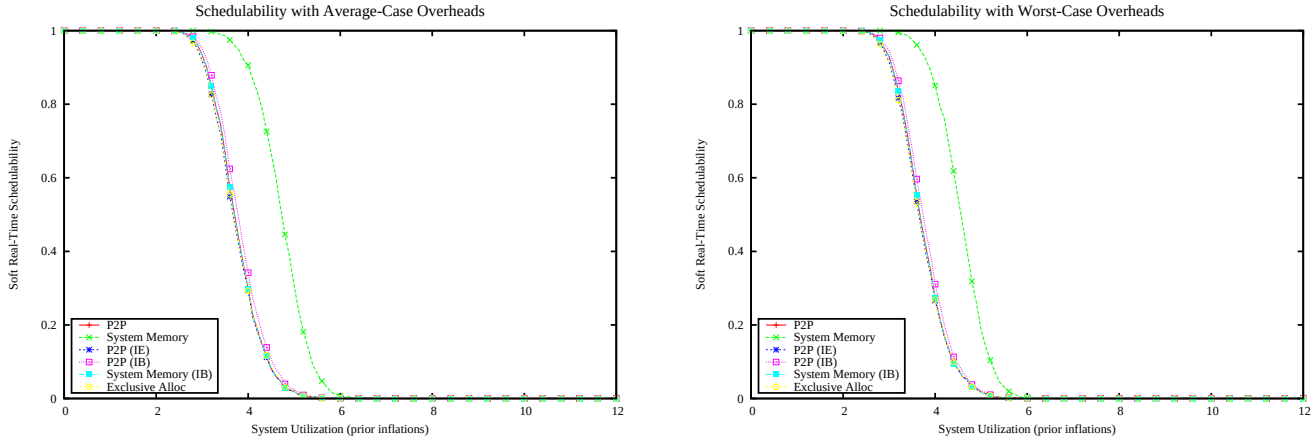

Figure 2086: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

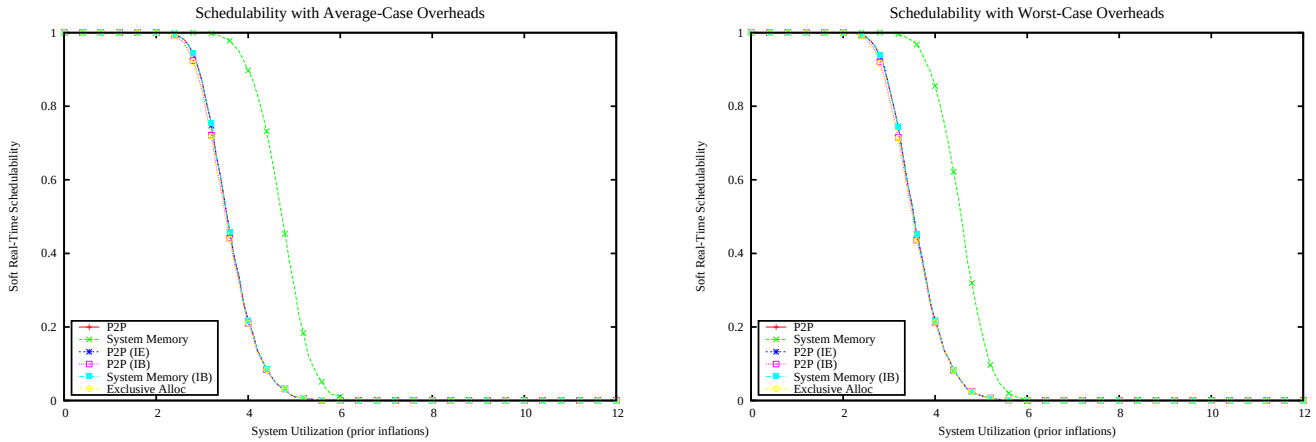

Figure 2087: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

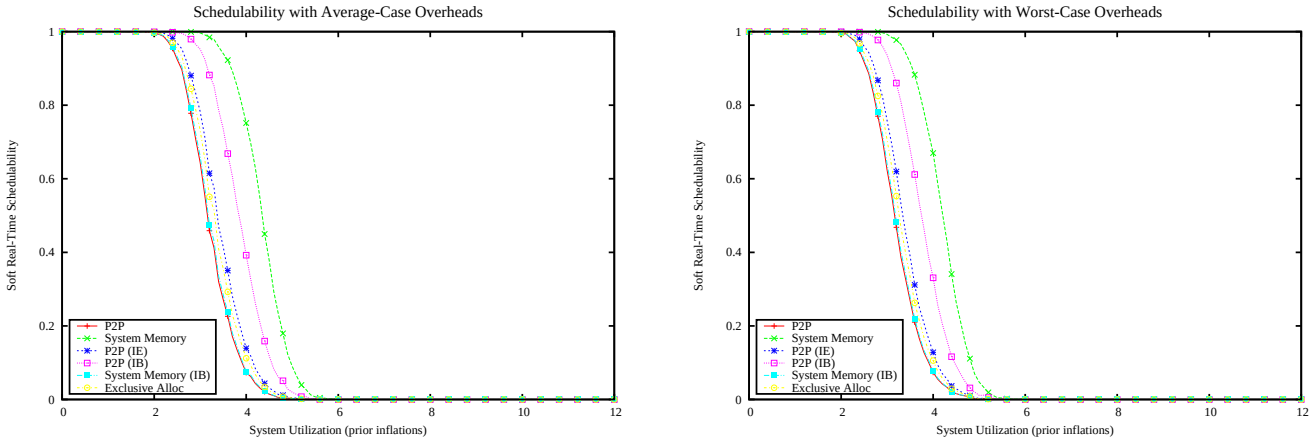

Figure 2088: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

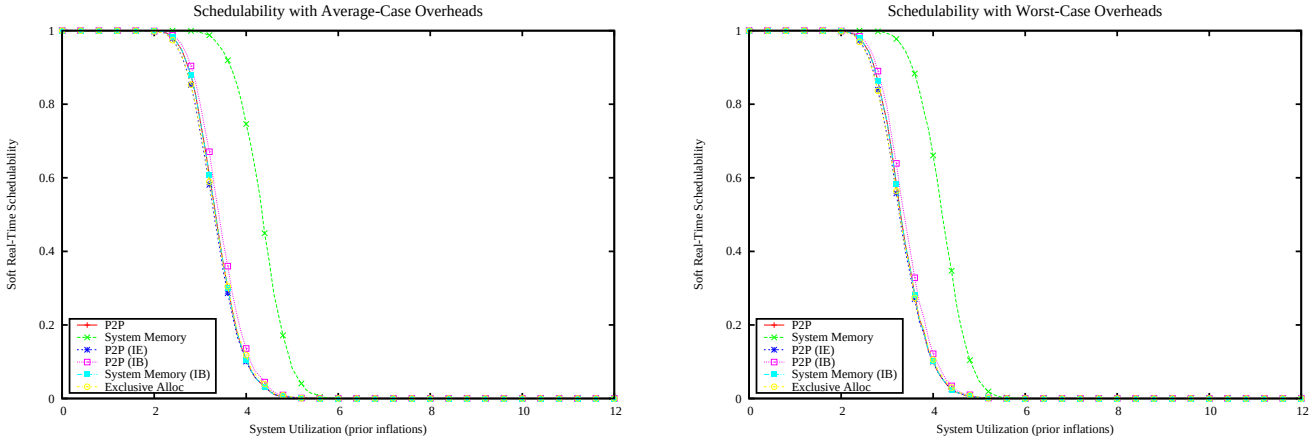

Figure 2089: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

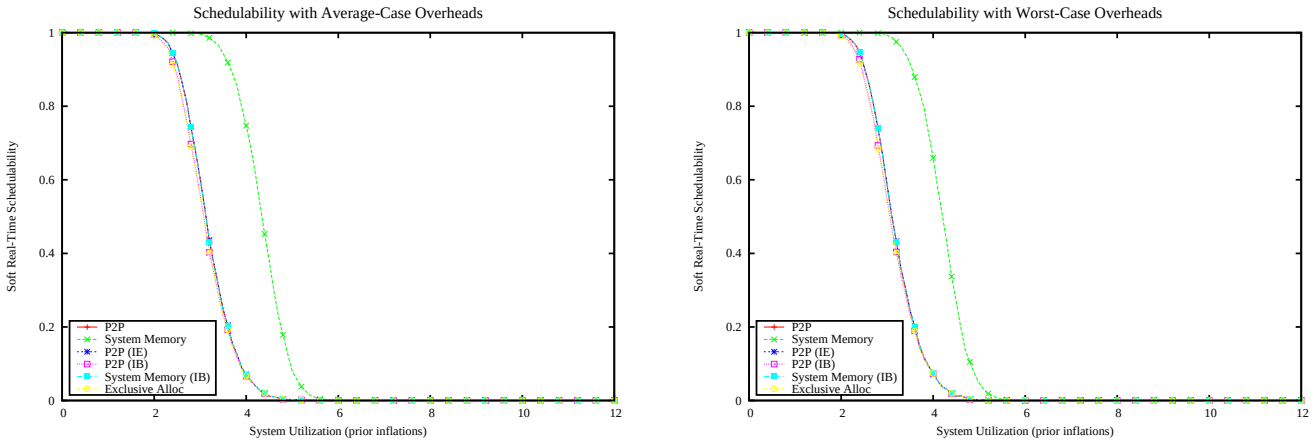

Figure 2090: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

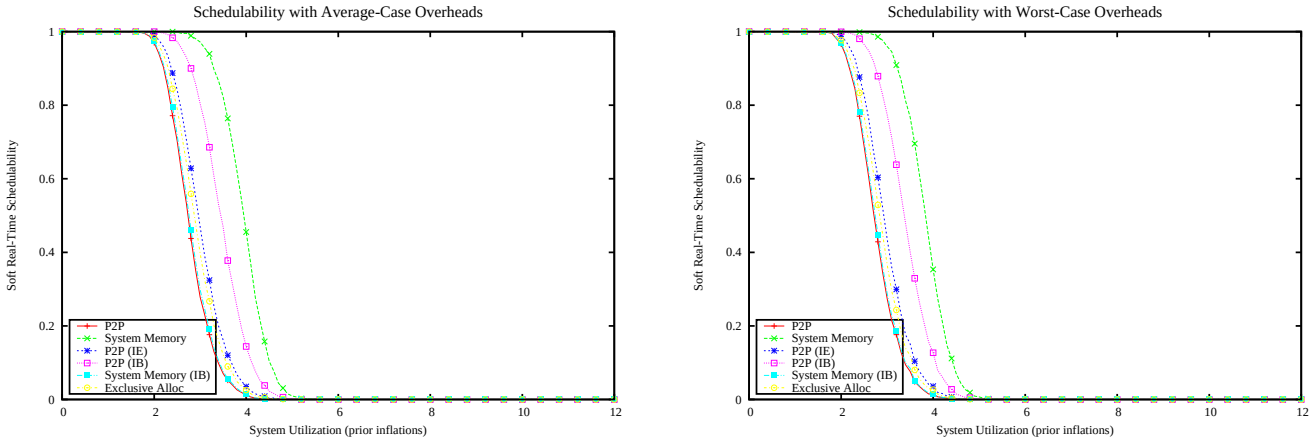

Figure 2091: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

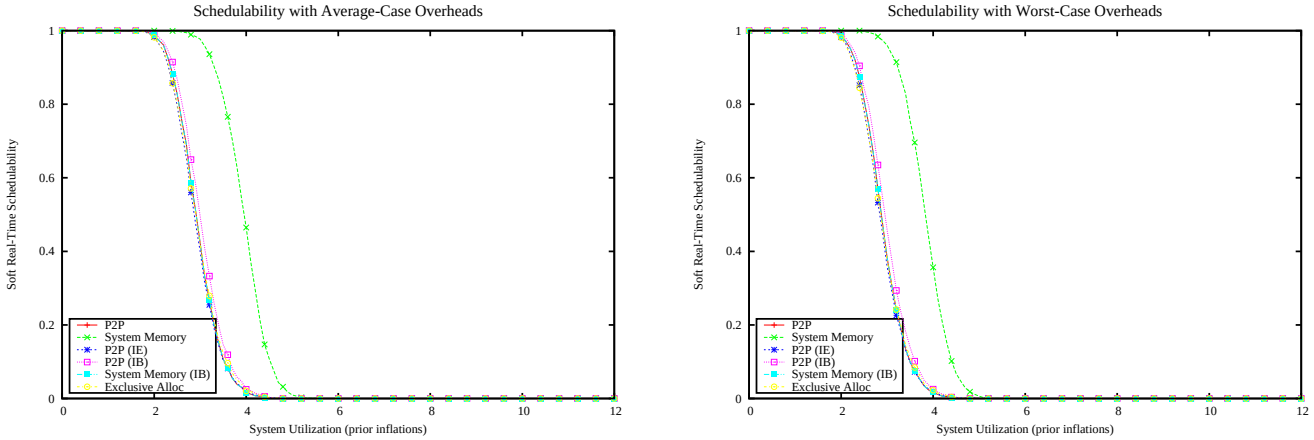

Figure 2092: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

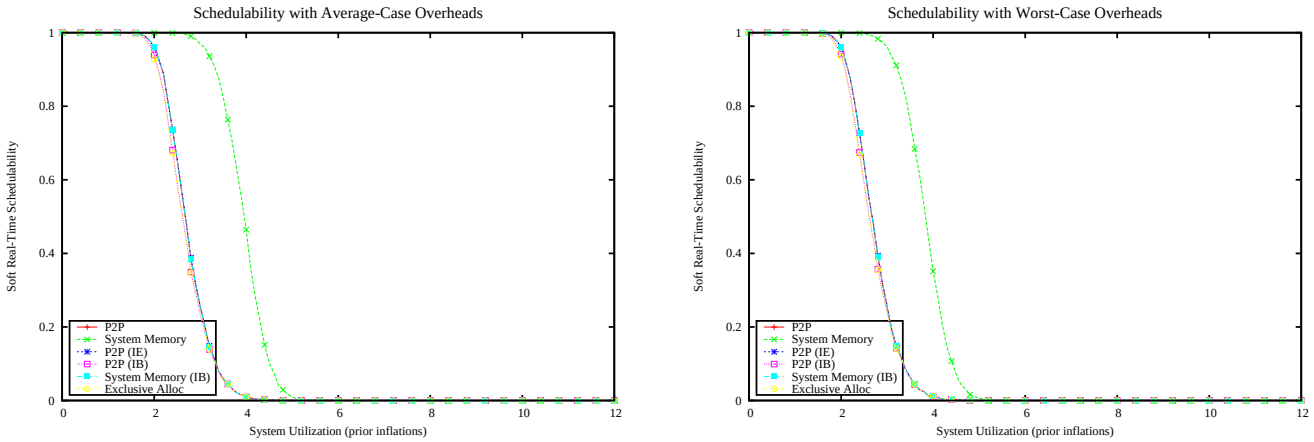

Figure 2093: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

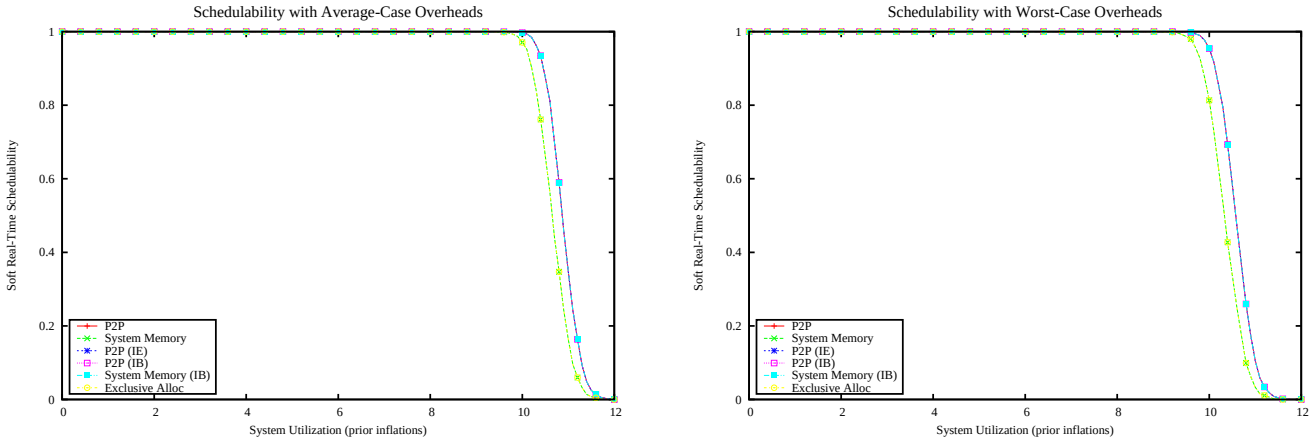

Figure 2094: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

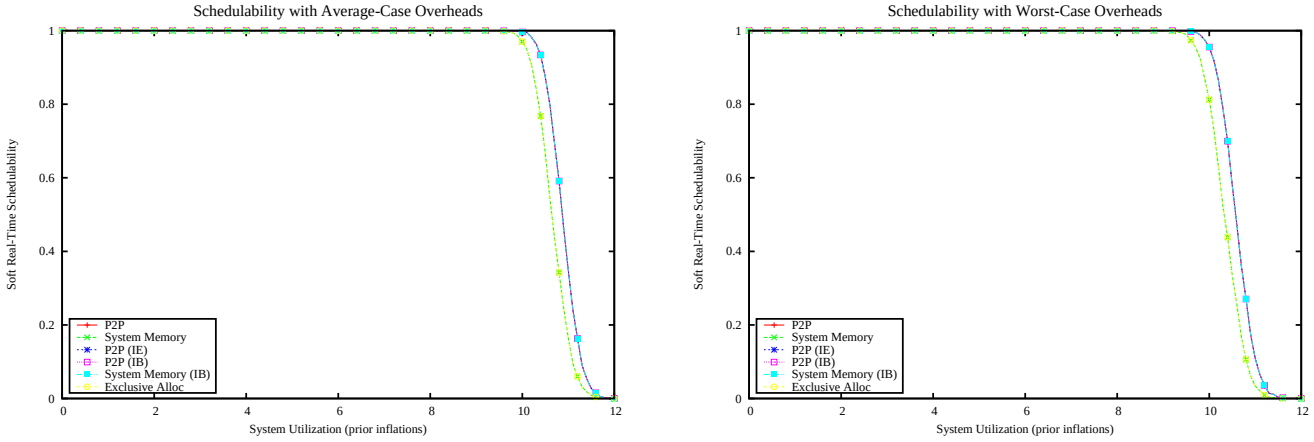

Figure 2095: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

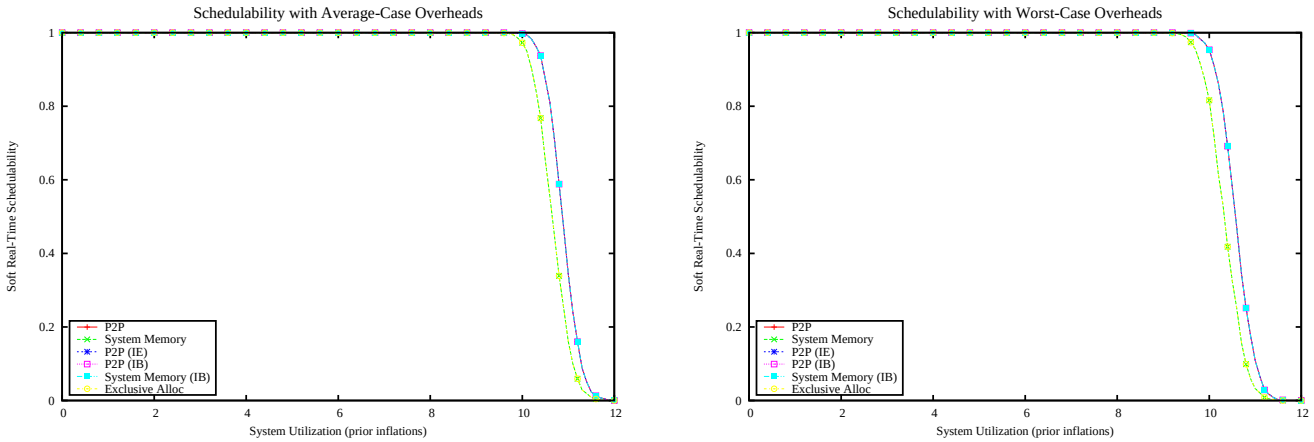

Figure 2096: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

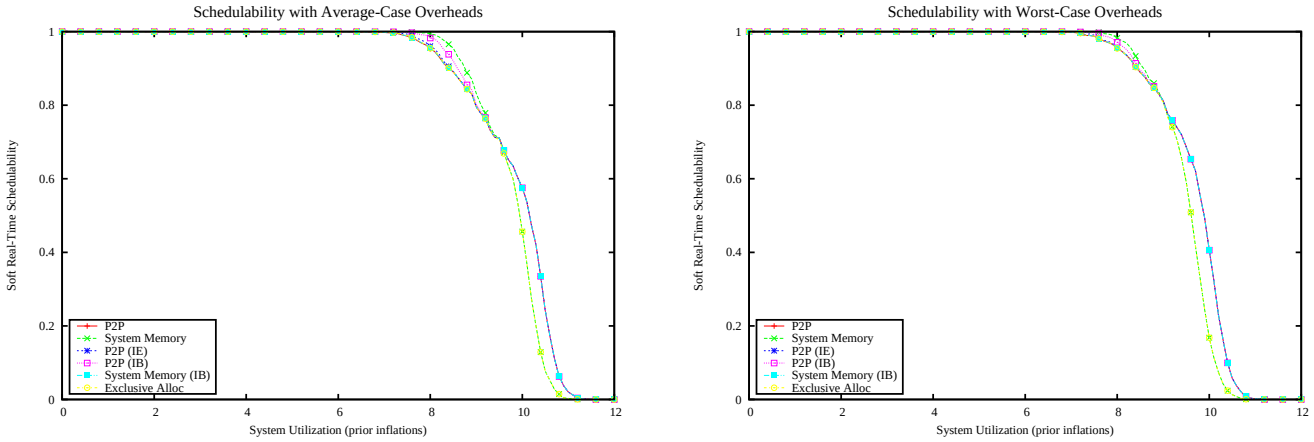

Figure 2097: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

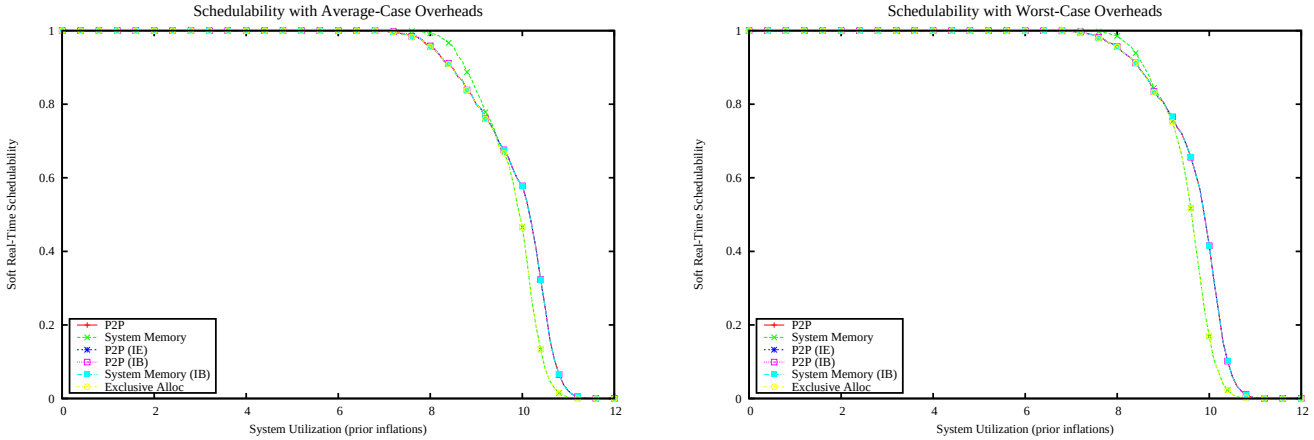

Figure 2098: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

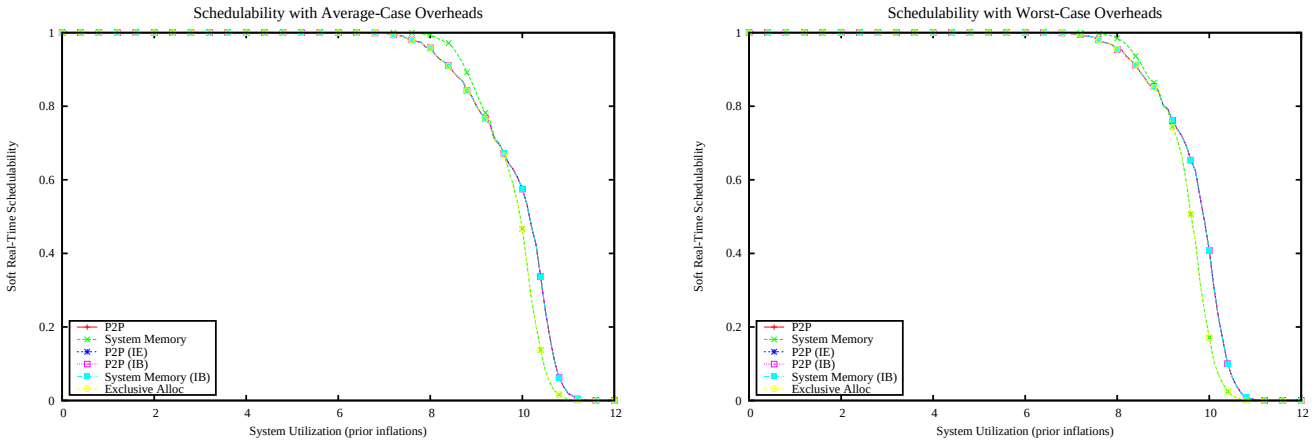

Figure 2099: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

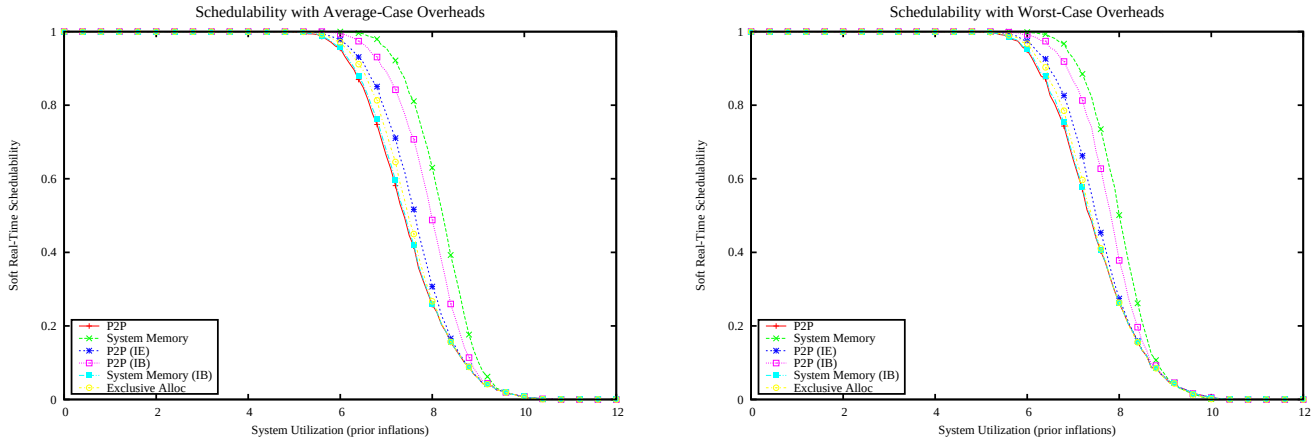

Figure 2100: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

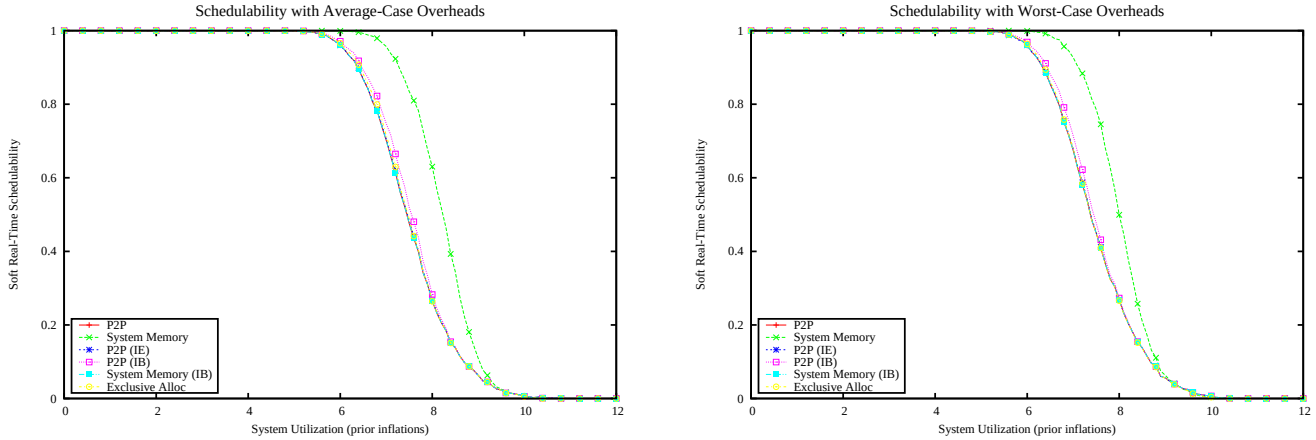

Figure 2101: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

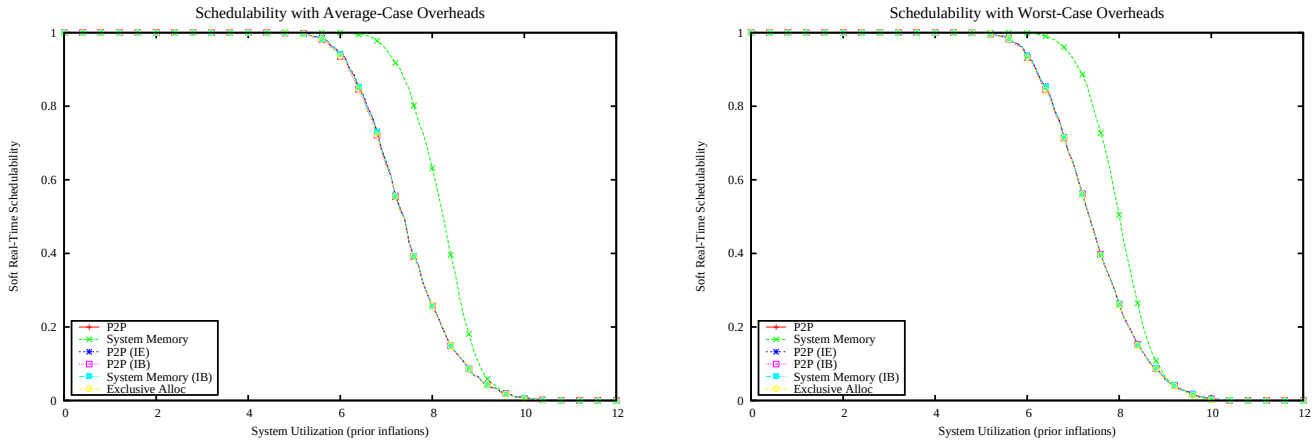

Figure 2102: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

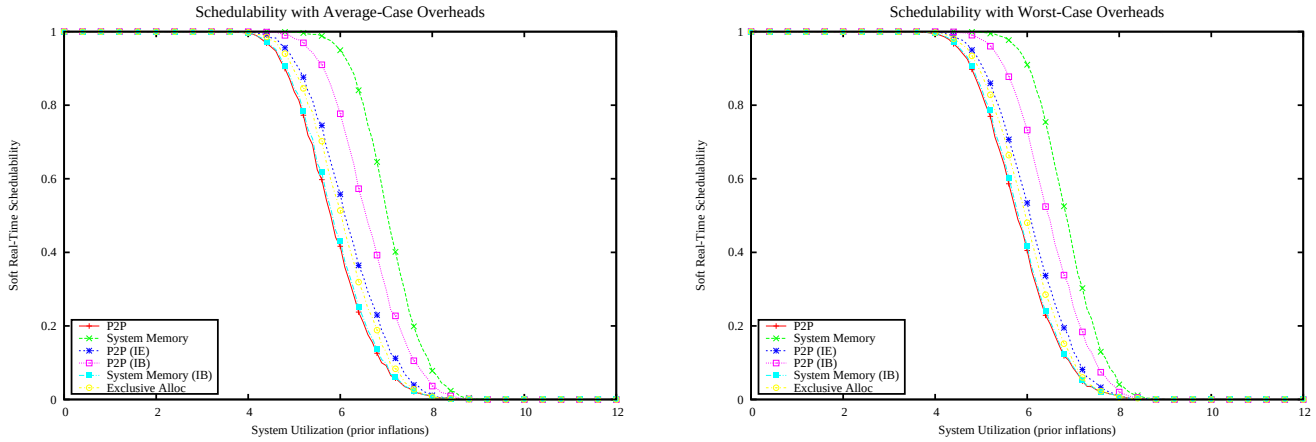

Figure 2103: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

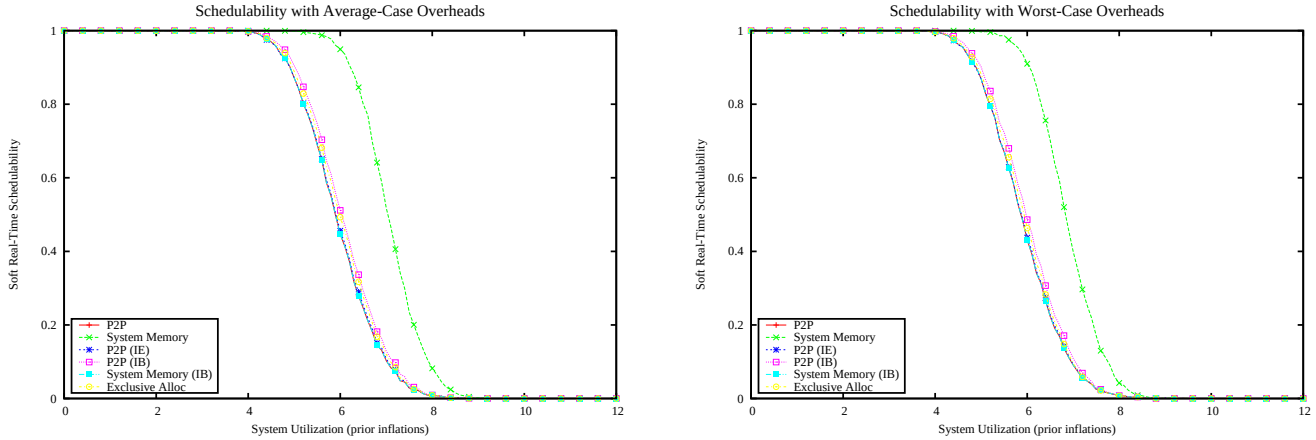

Figure 2104: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

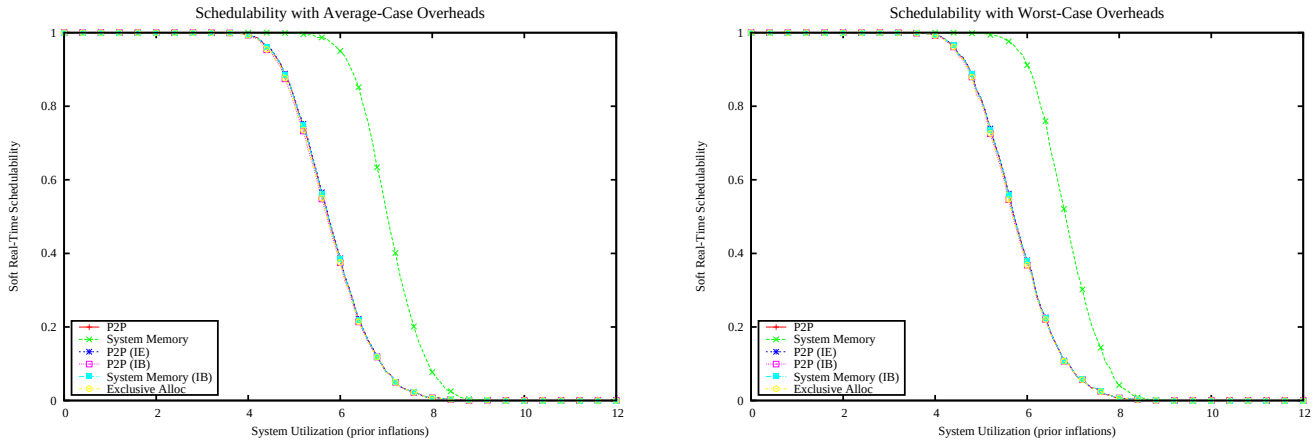

Figure 2105: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

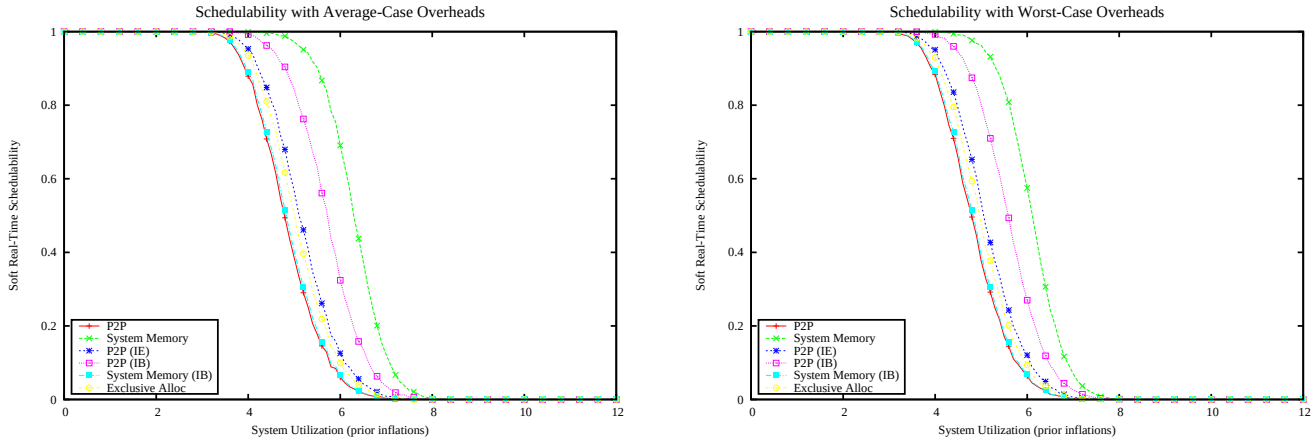

Figure 2106: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

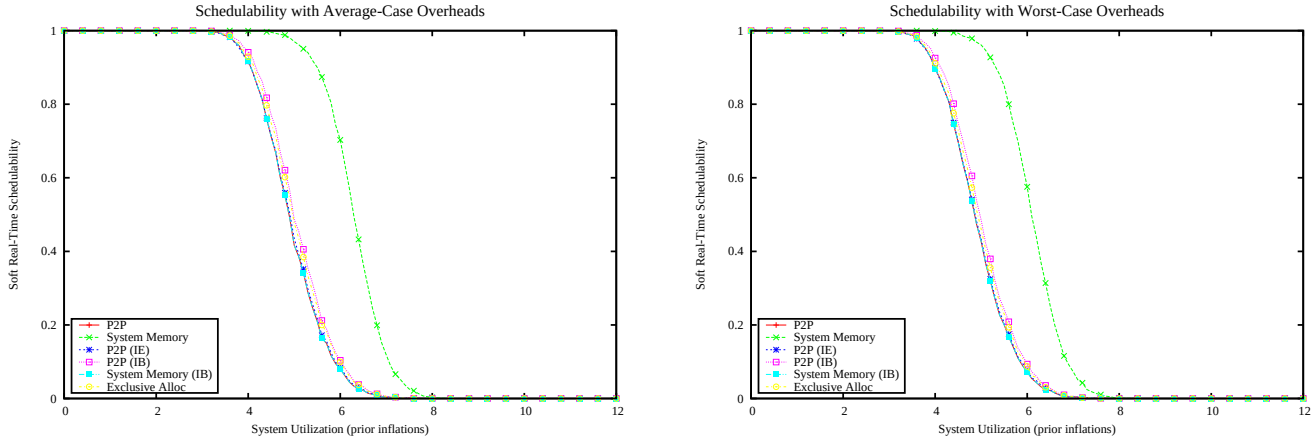

Figure 2107: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

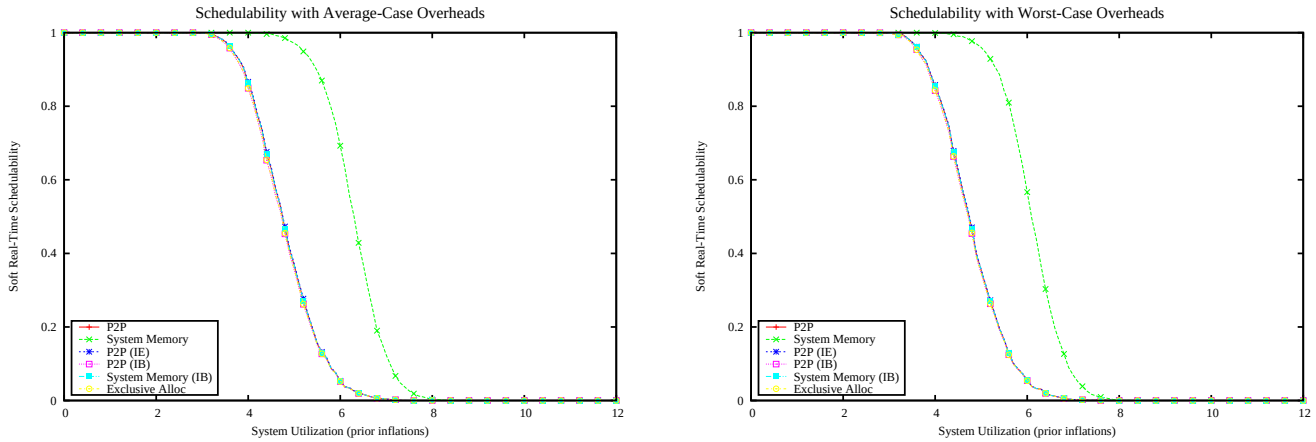

Figure 2108: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

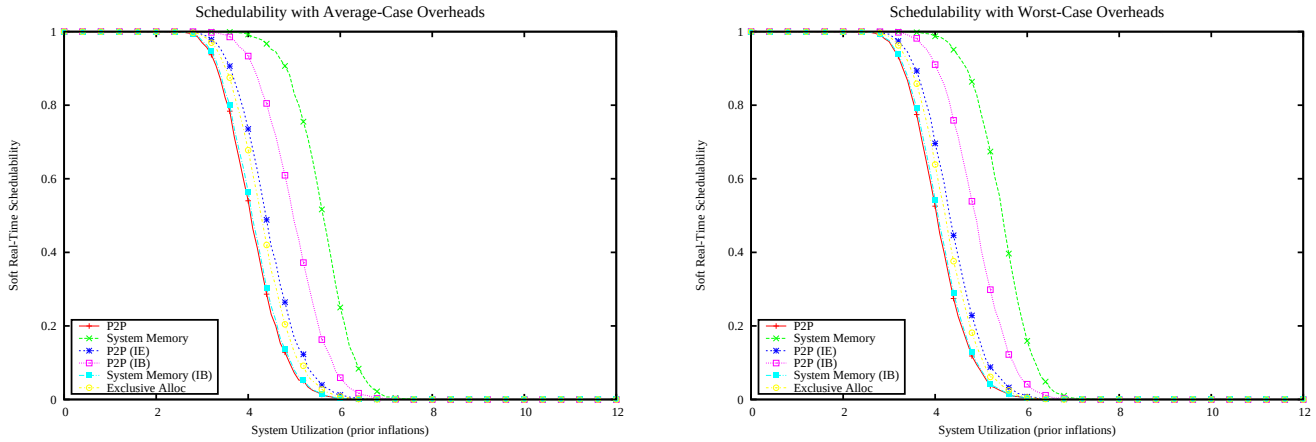

Figure 2109: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

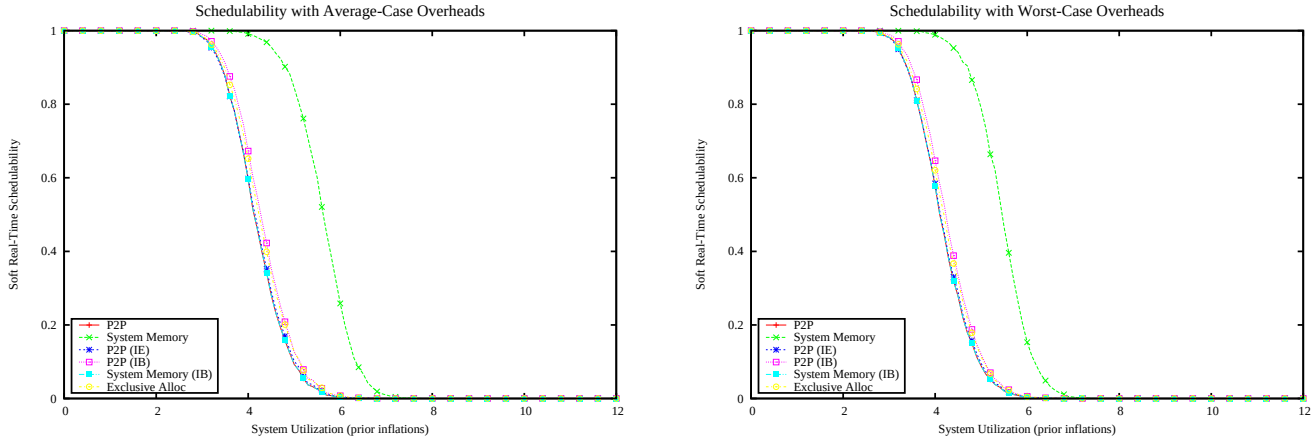

Figure 2110: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

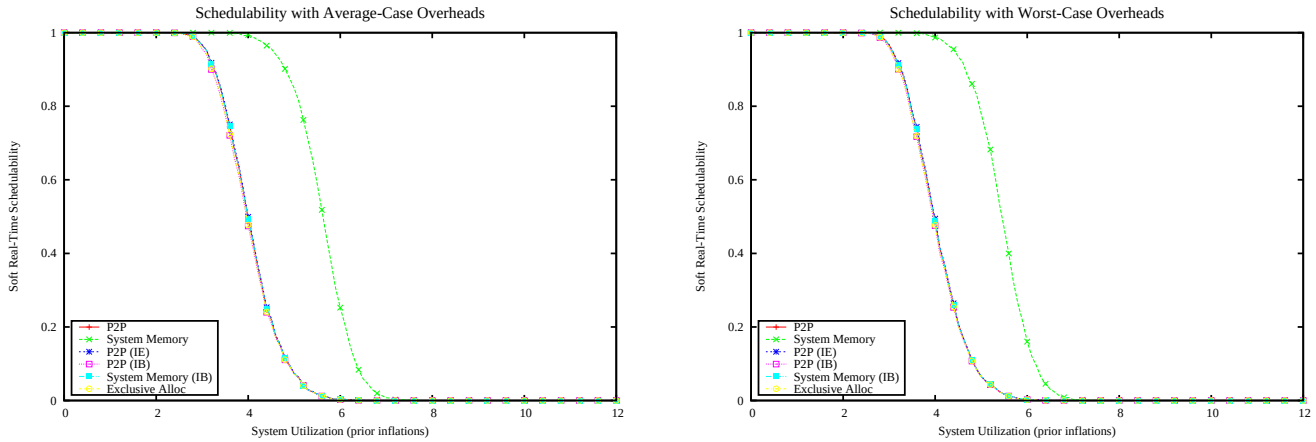

Figure 2111: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

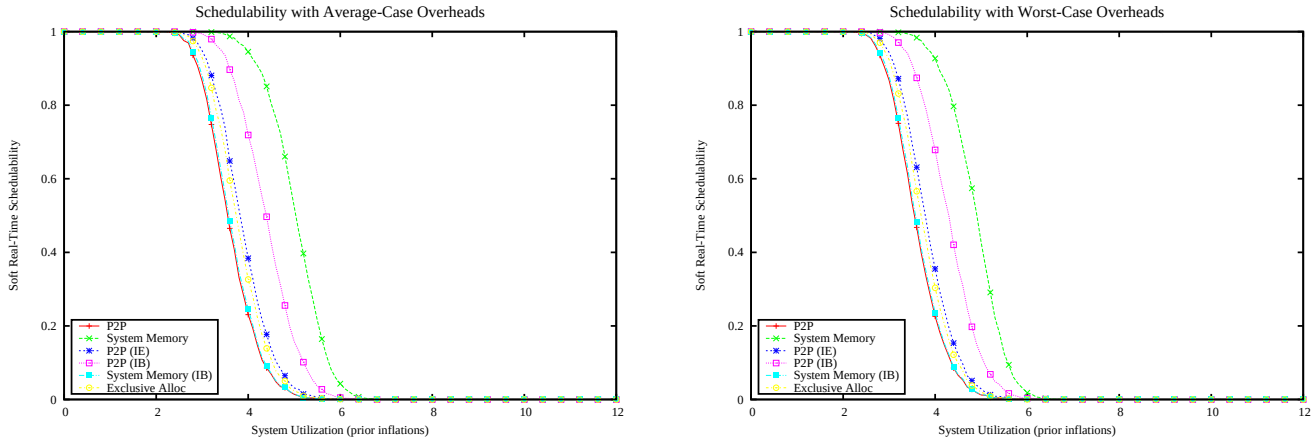

Figure 2112: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

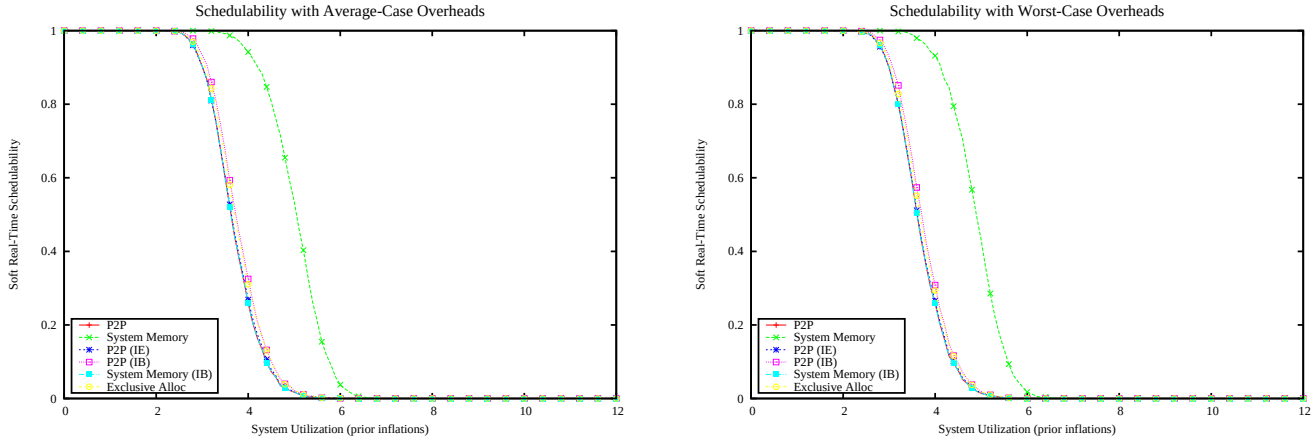

Figure 2113: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

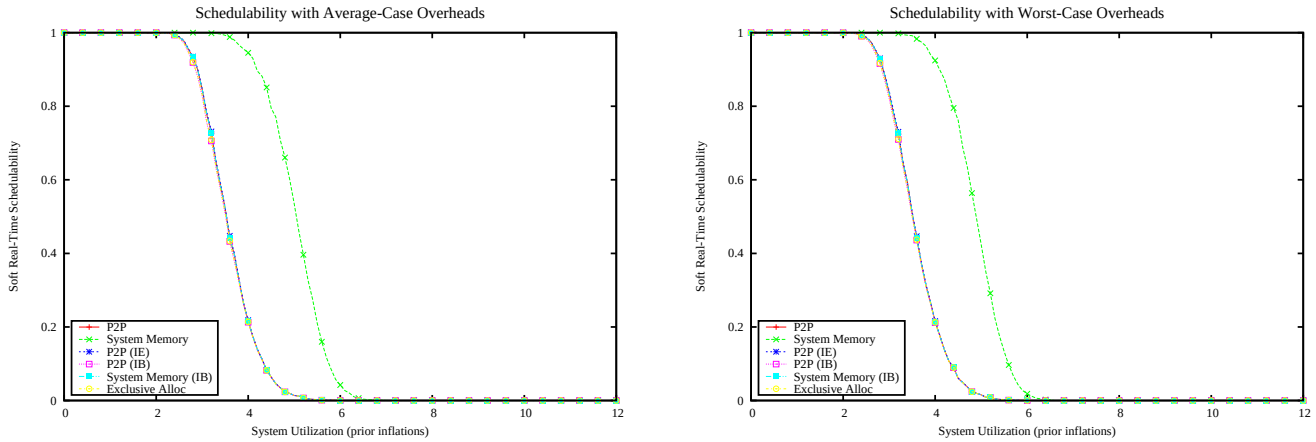

Figure 2114: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

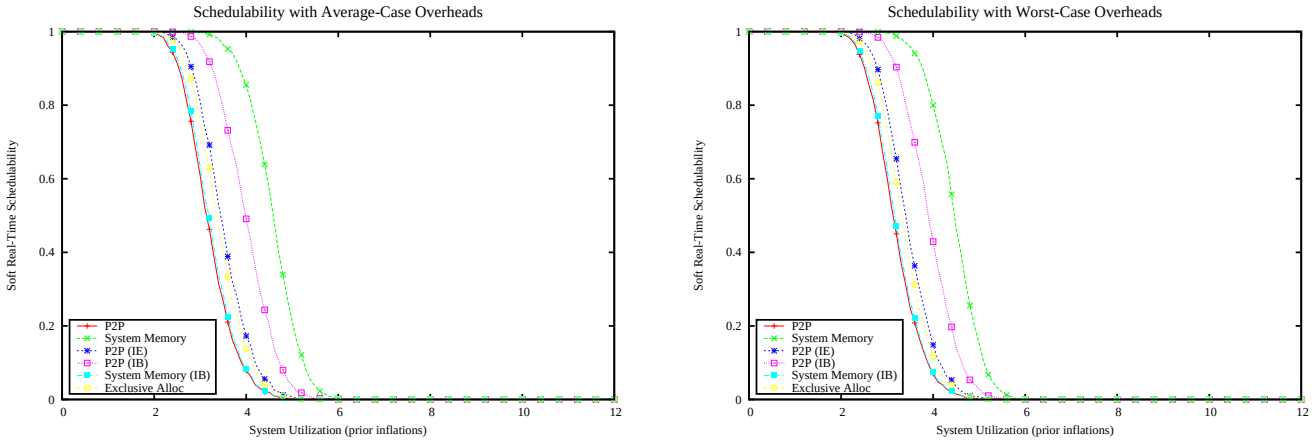

Figure 2115: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

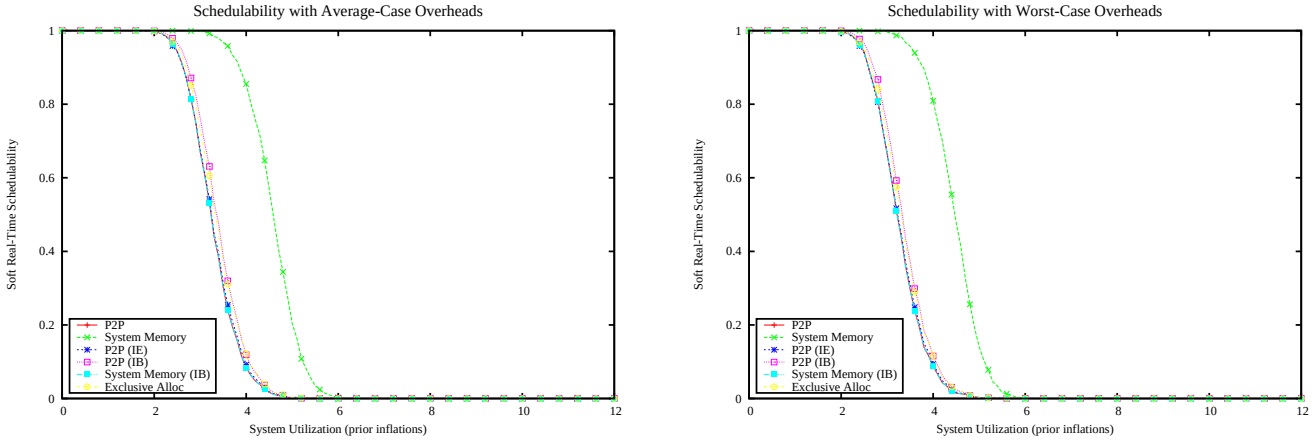

Figure 2116: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

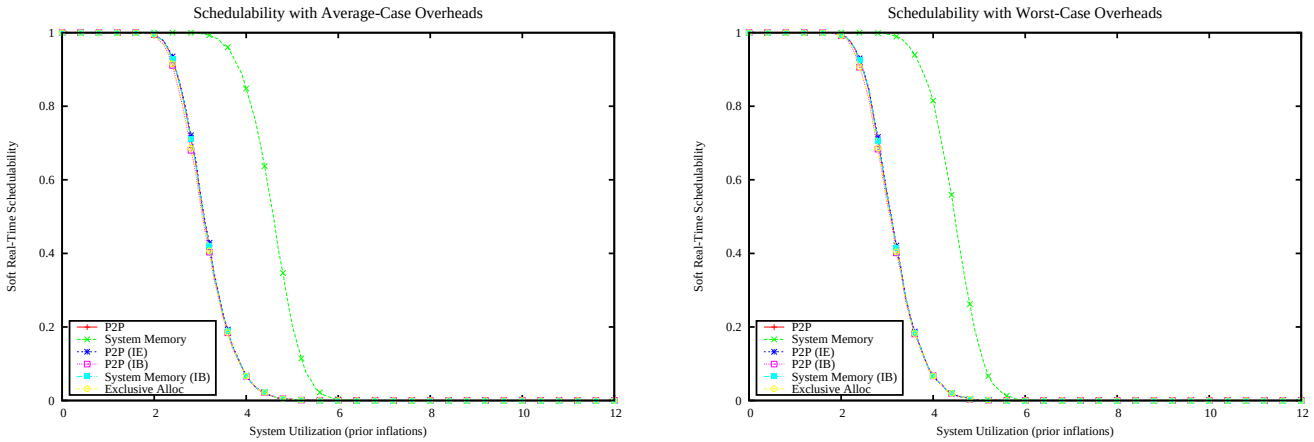

Figure 2117: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

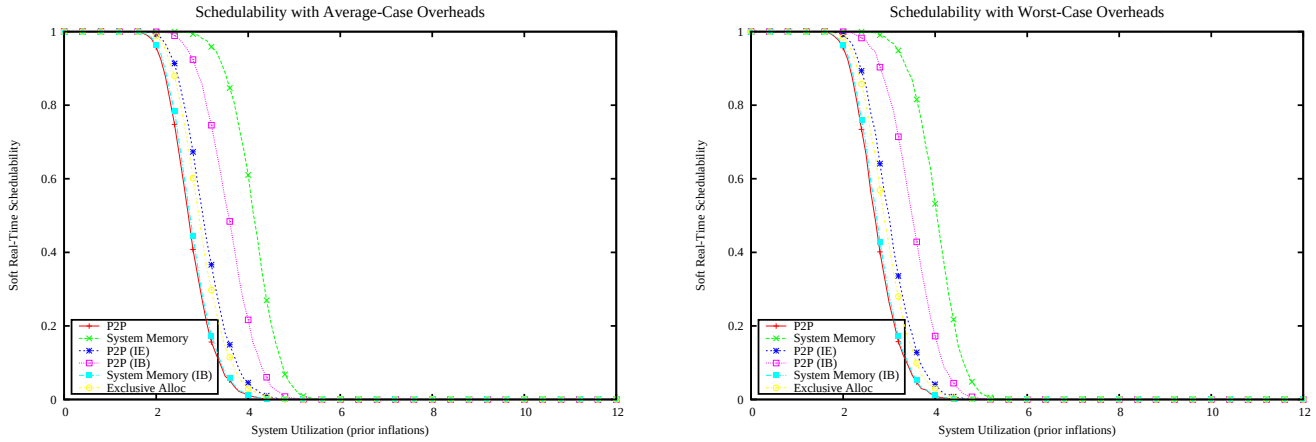

Figure 2118: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

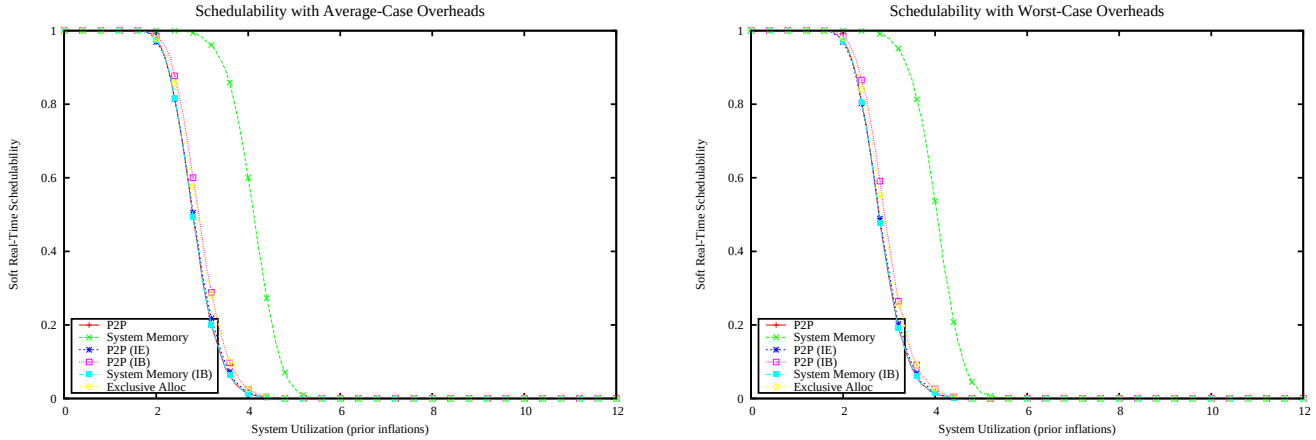

Figure 2119: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

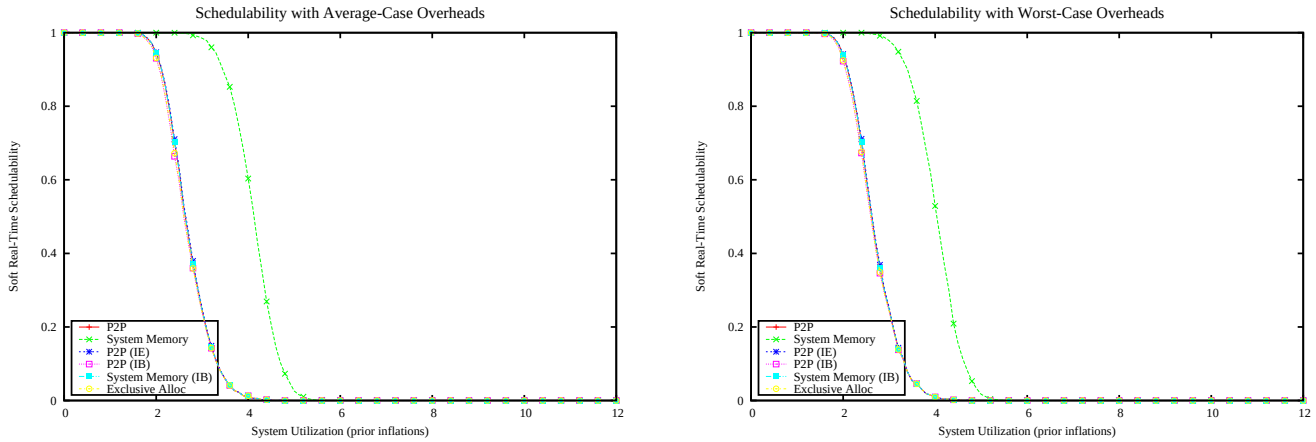

Figure 2120: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

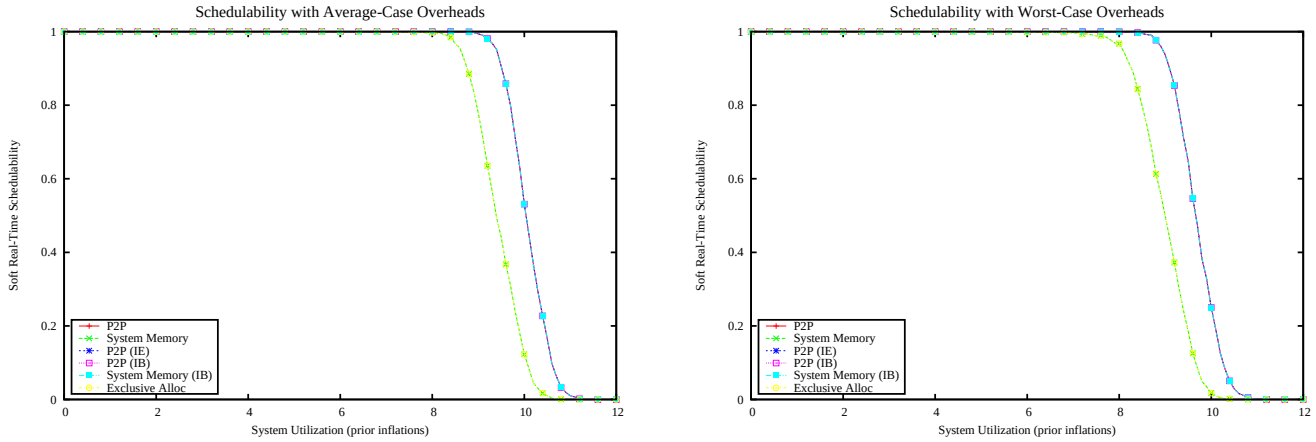

Figure 2121: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

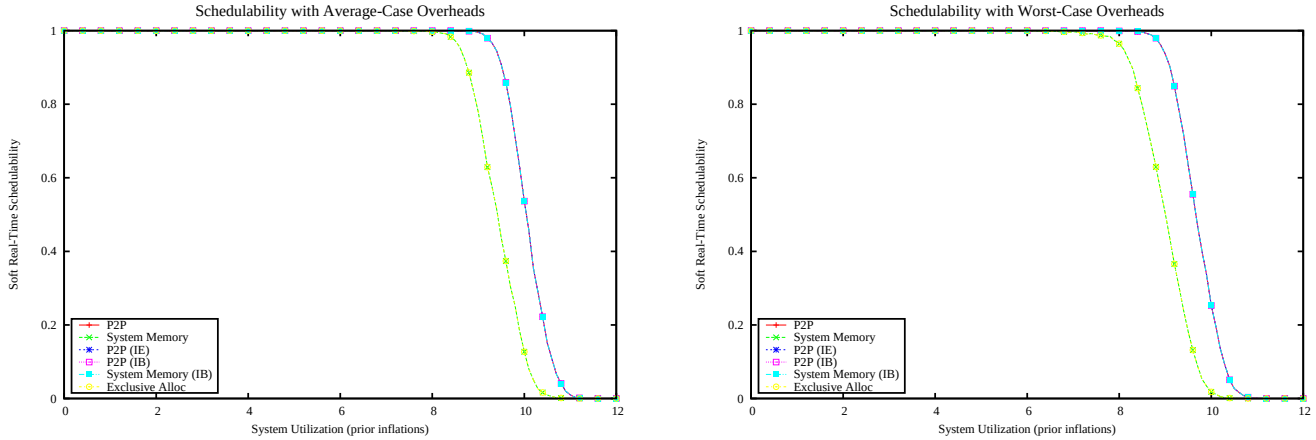

Figure 2122: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

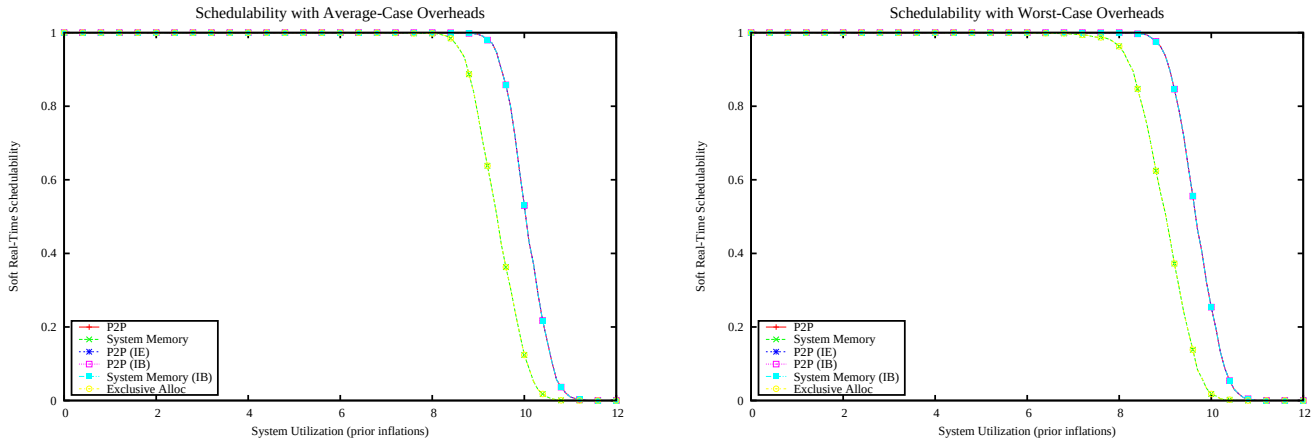

Figure 2123: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

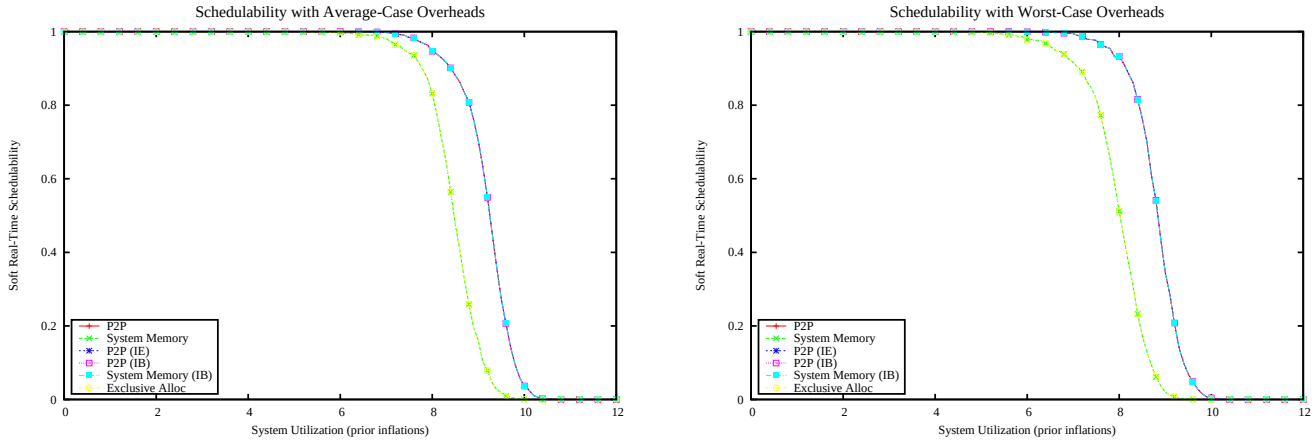

Figure 2124: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

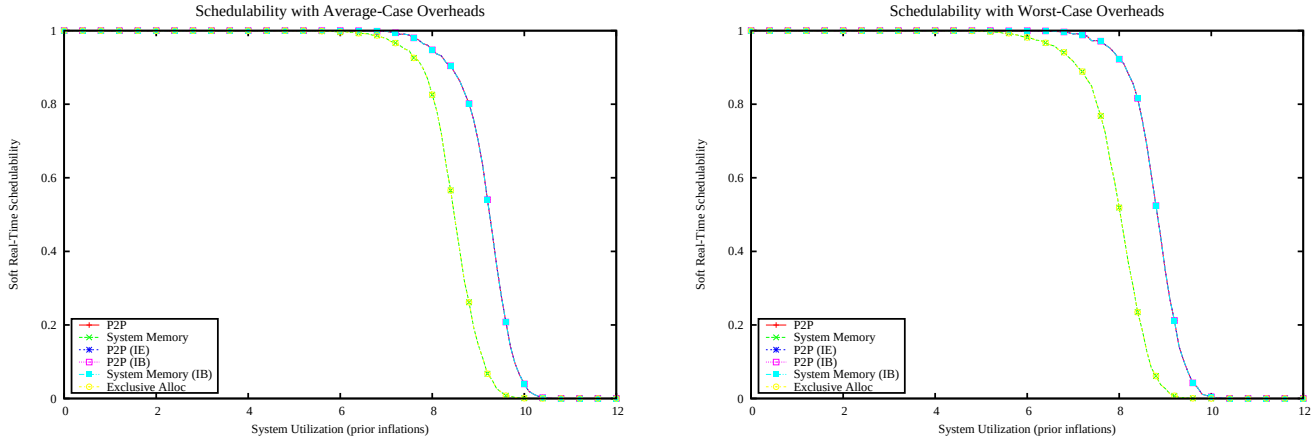

Figure 2125: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

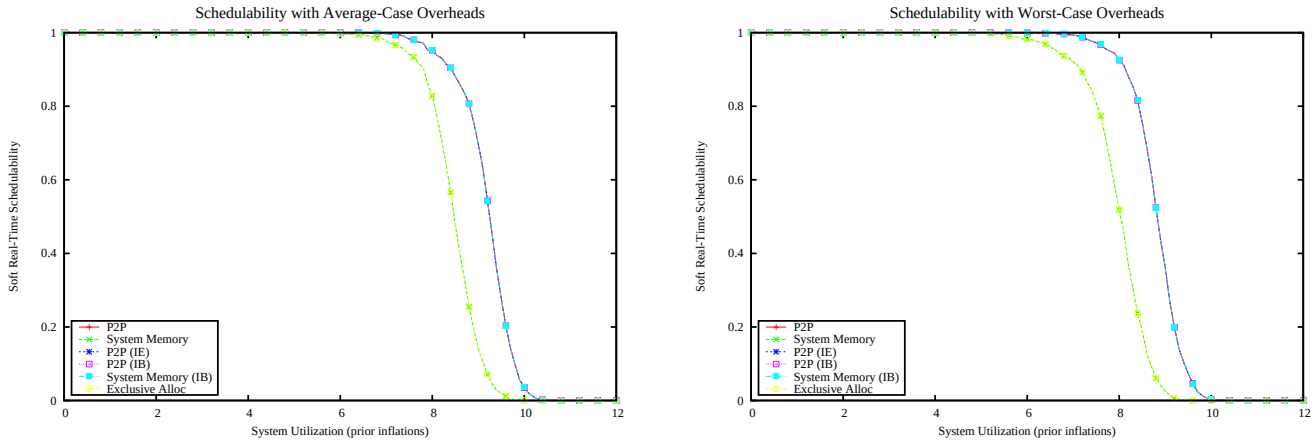

Figure 2126: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

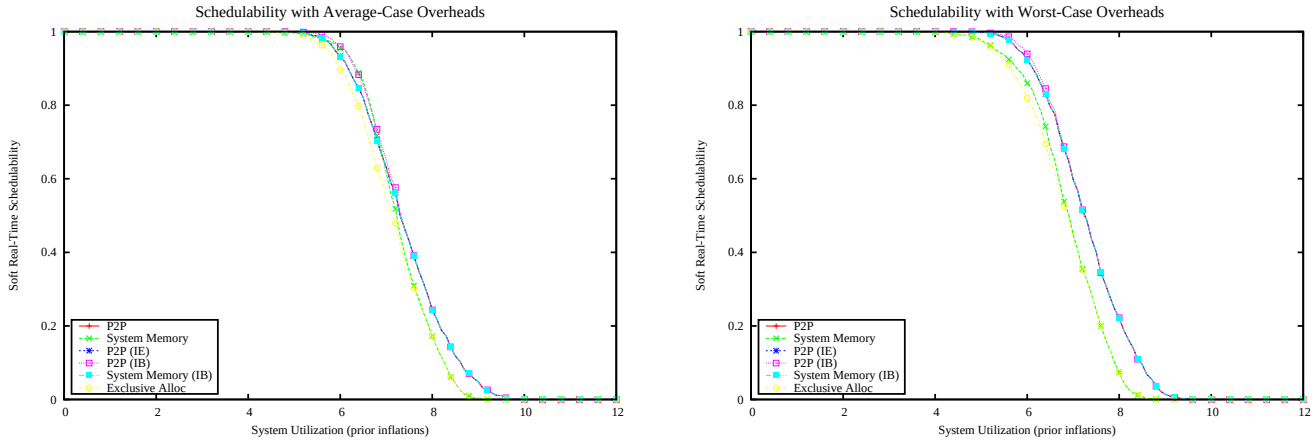

Figure 2127: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

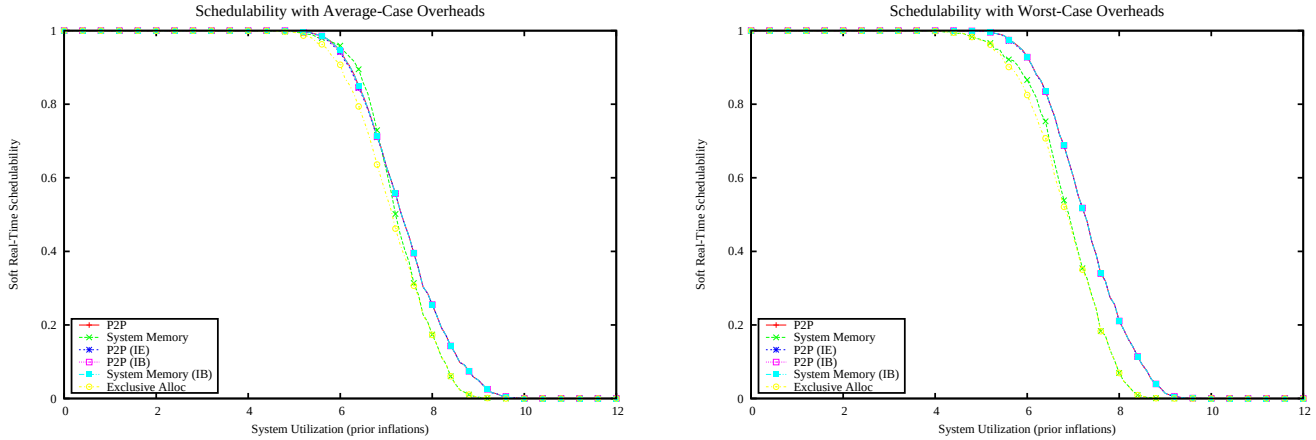

Figure 2128: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

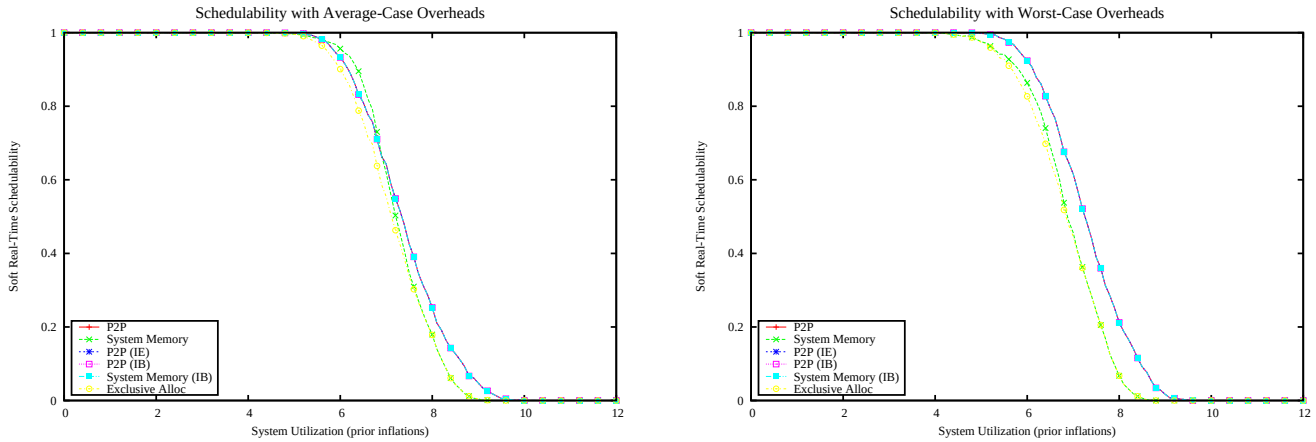

Figure 2129: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

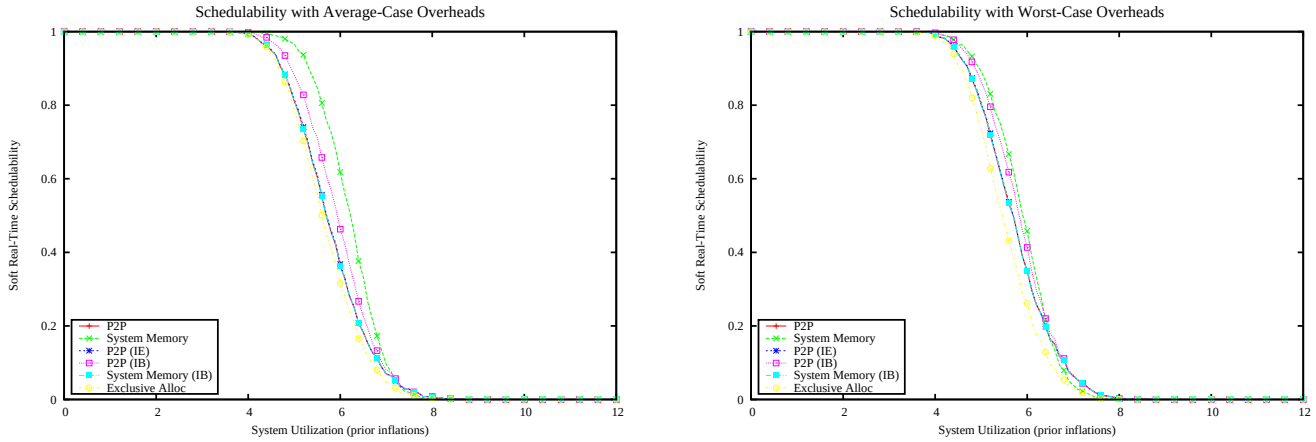

Figure 2130: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

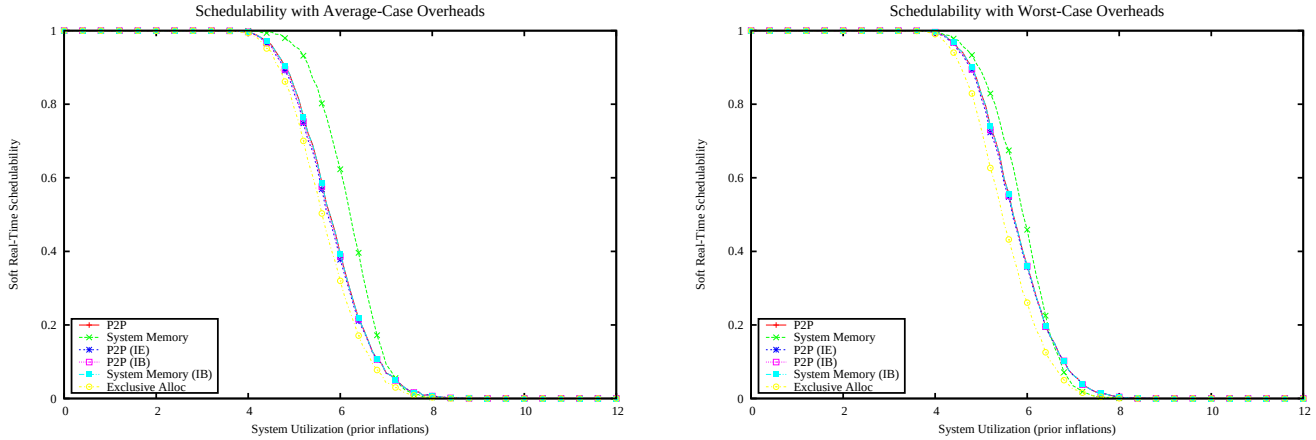

Figure 2131: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

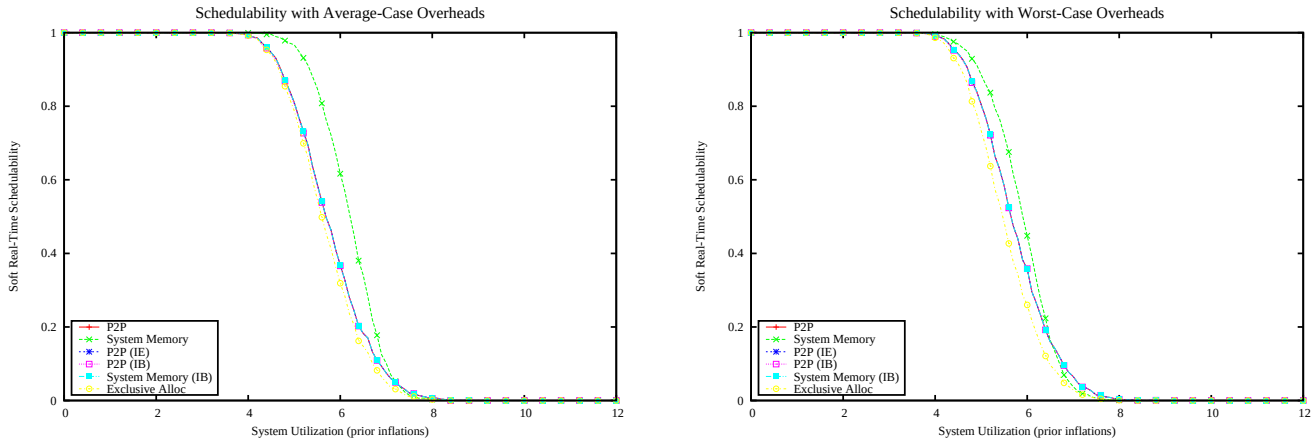

Figure 2132: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

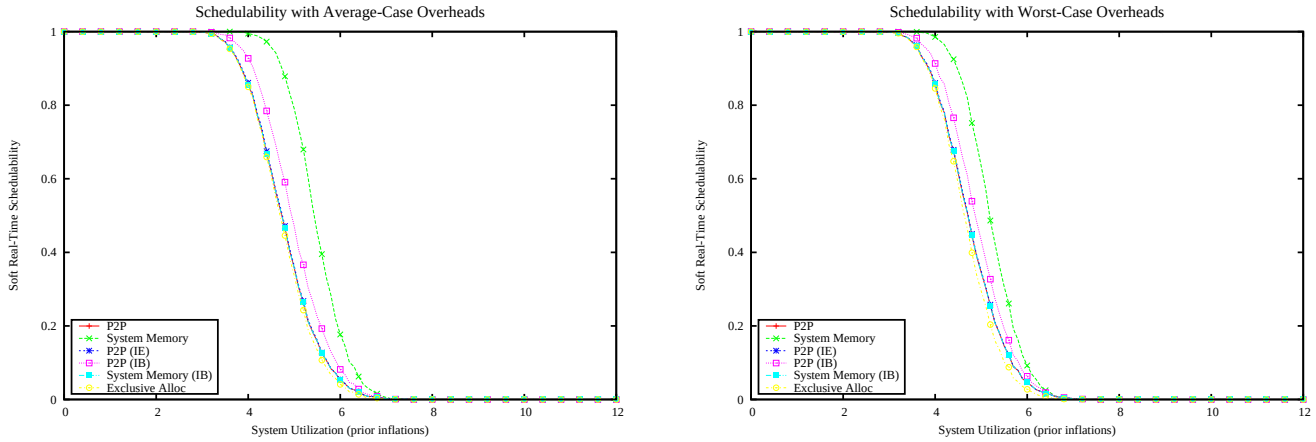

Figure 2133: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

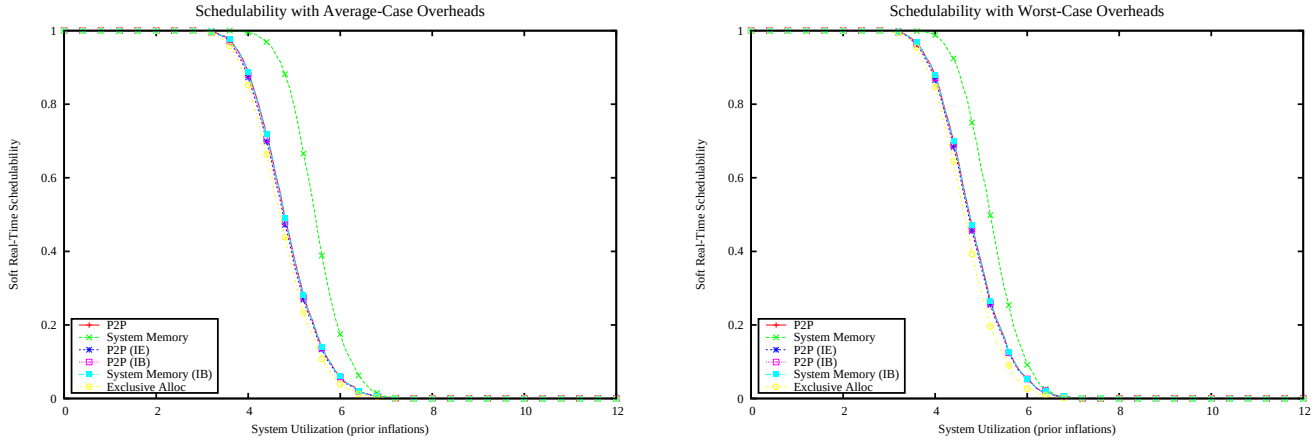

Figure 2134: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

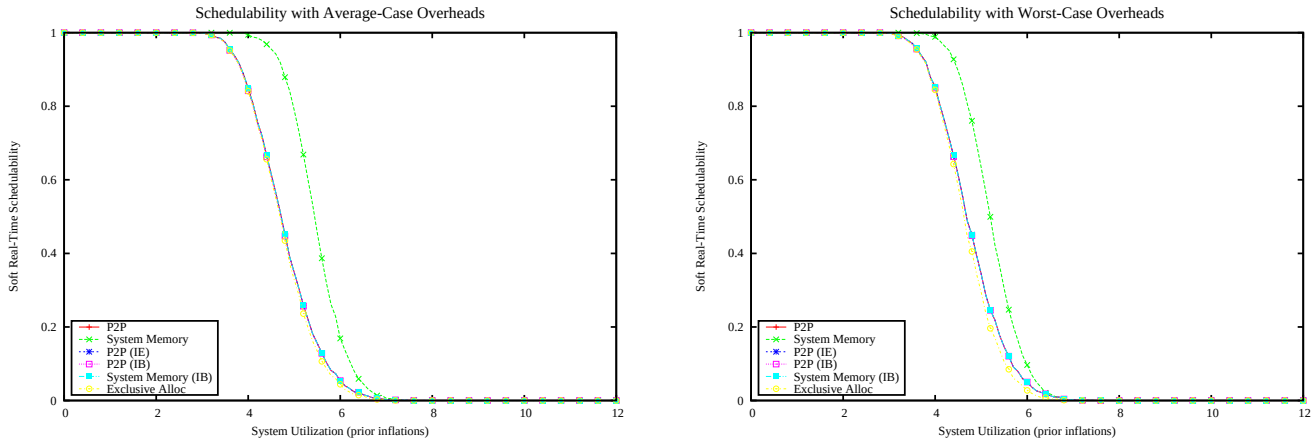

Figure 2135: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

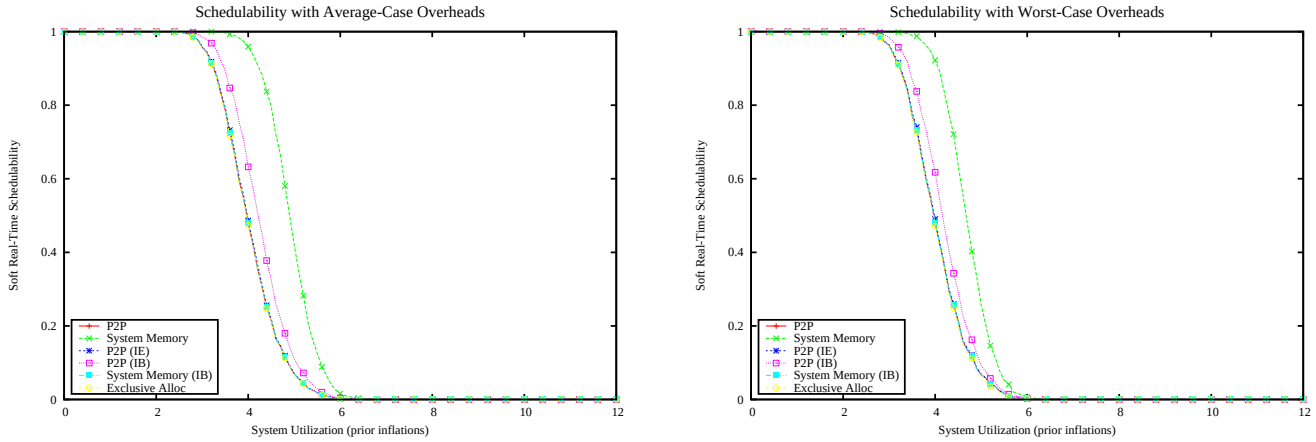

Figure 2136: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

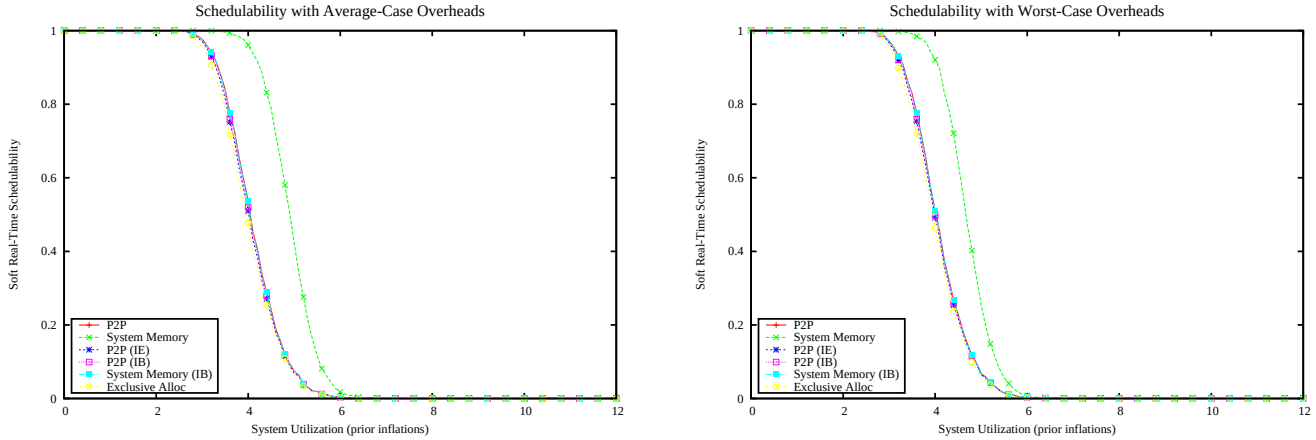

Figure 2137: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

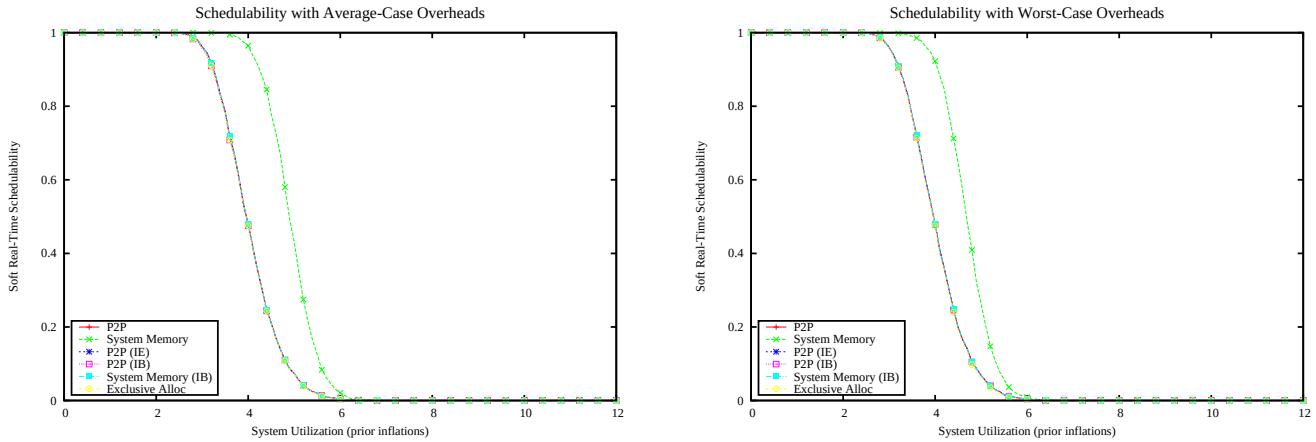

Figure 2138: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

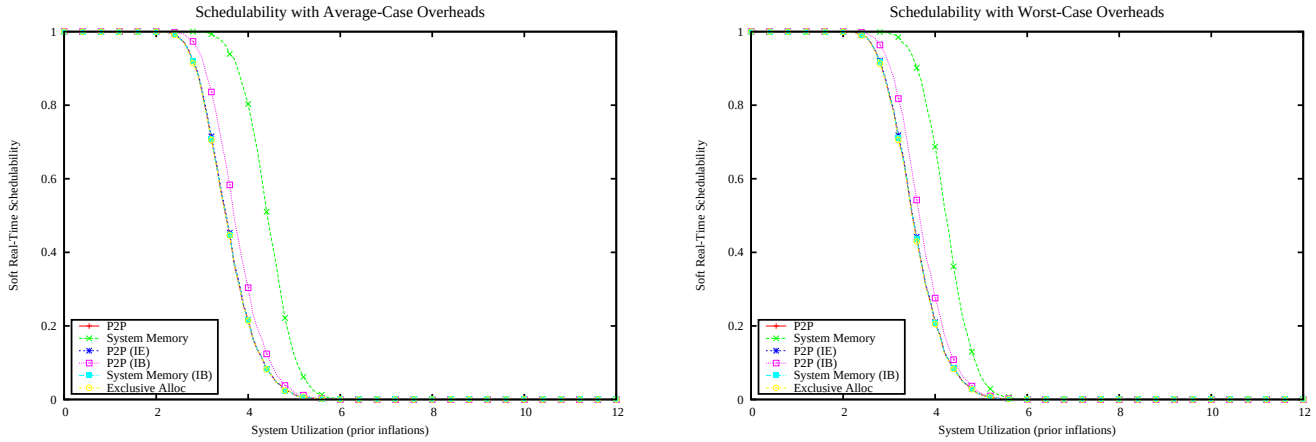

Figure 2139: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

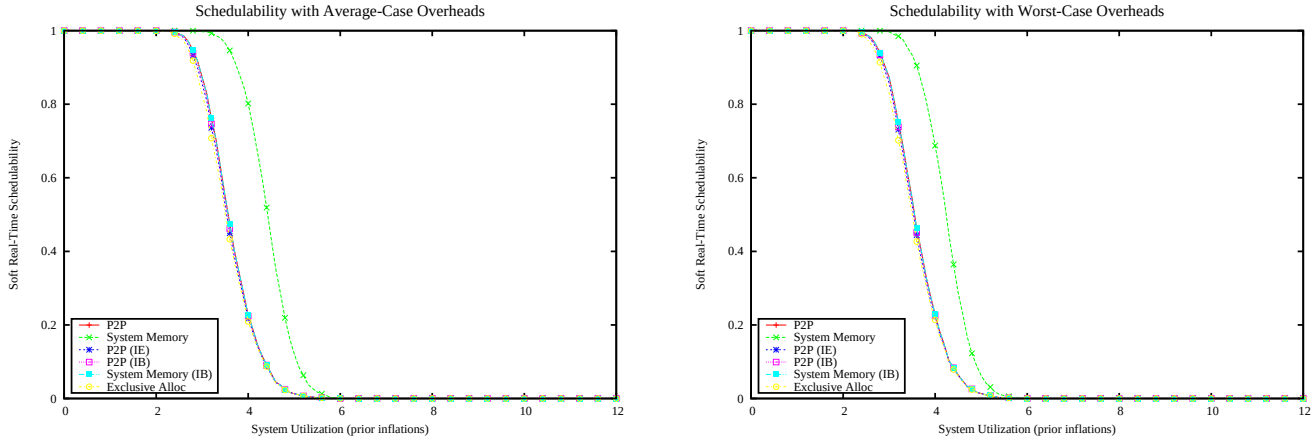

Figure 2140: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

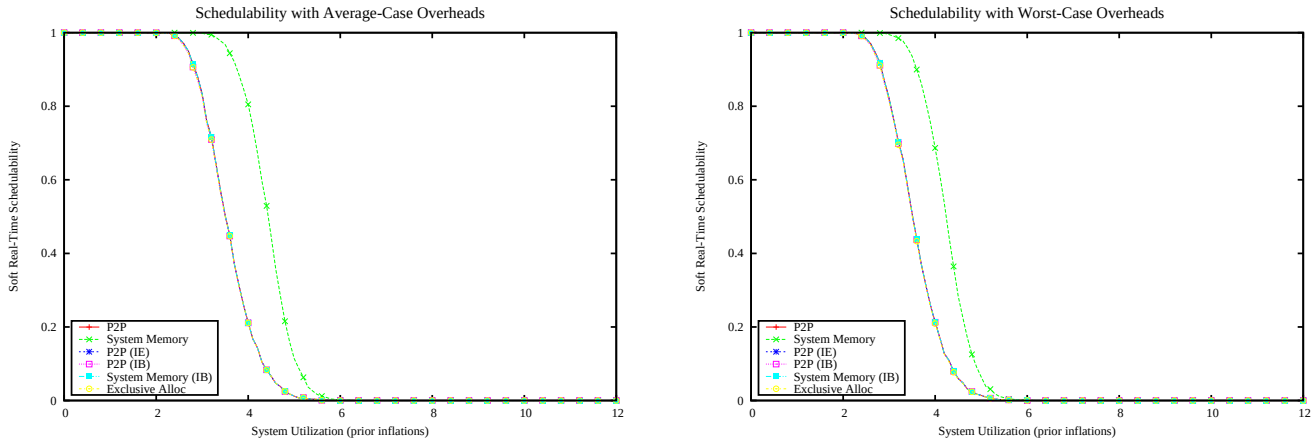

Figure 2141: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

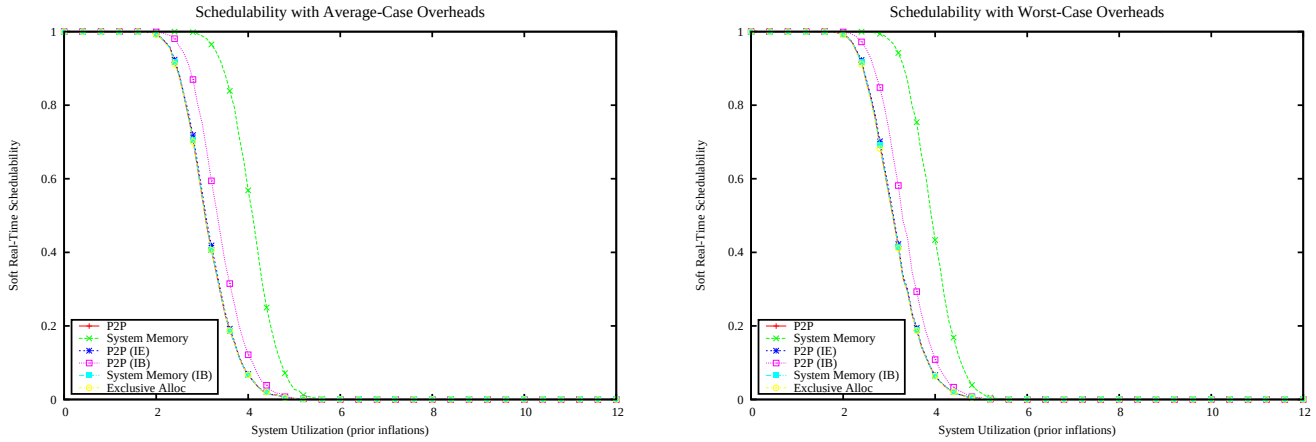

Figure 2142: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

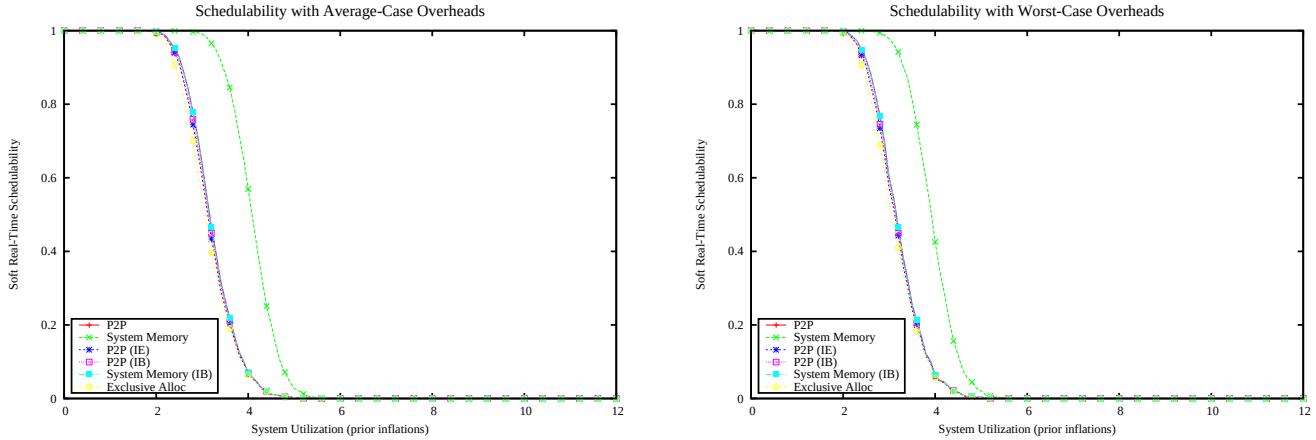

Figure 2143: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

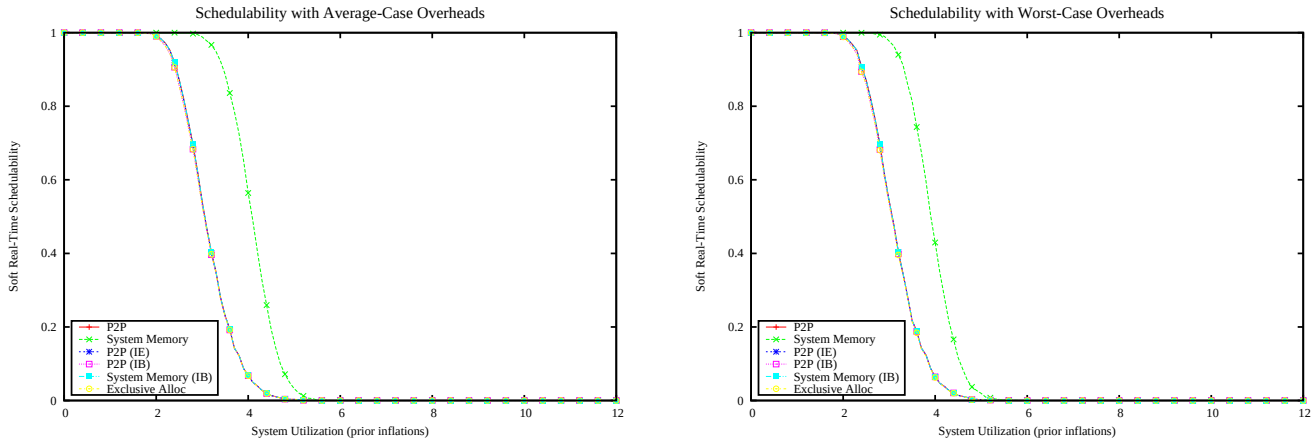

Figure 2144: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

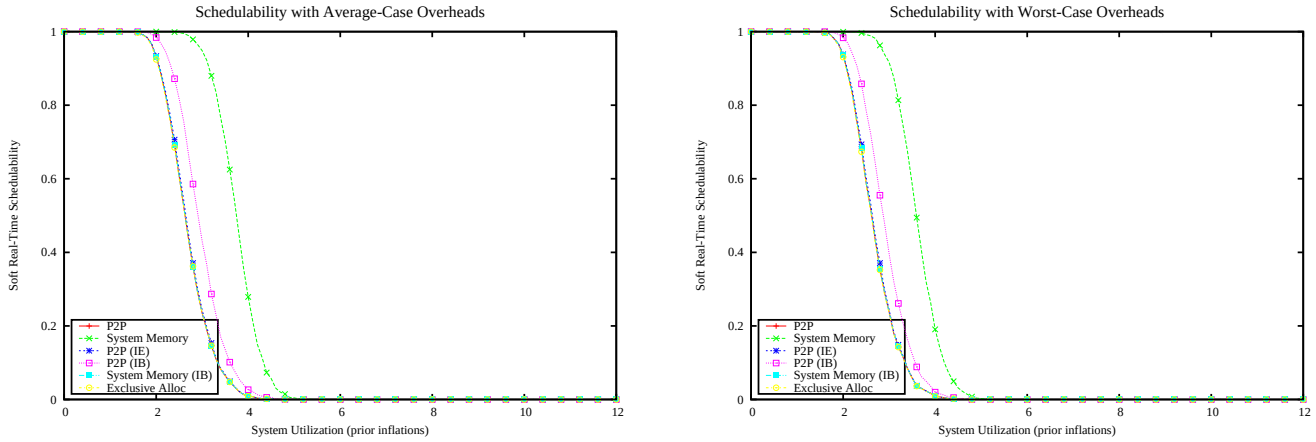

Figure 2145: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

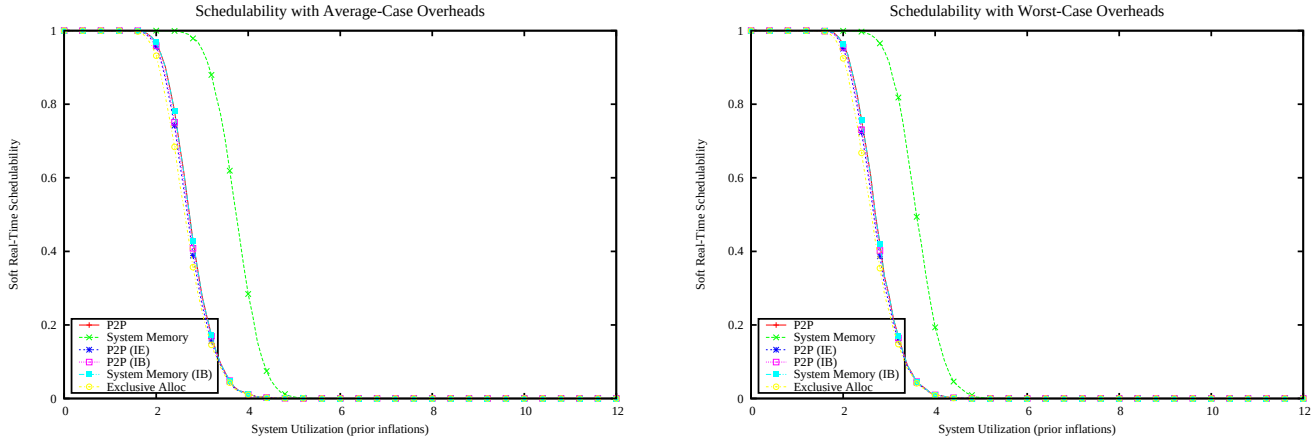

Figure 2146: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

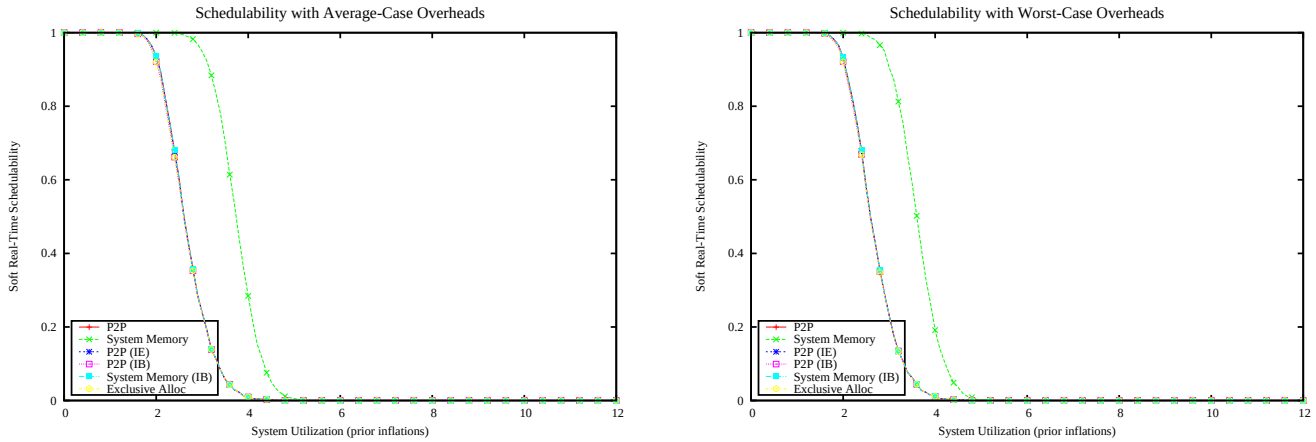

Figure 2147: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

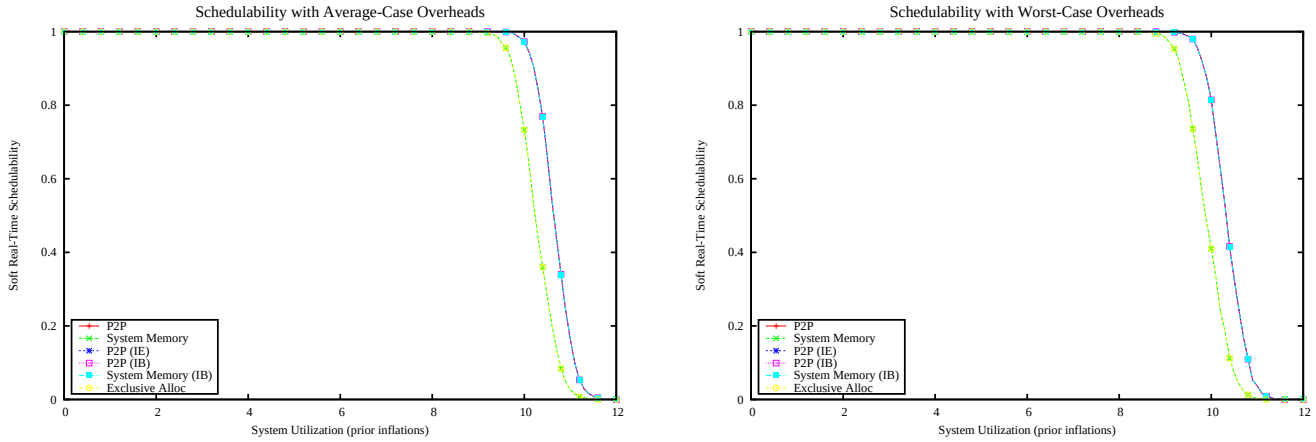

Figure 2148: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

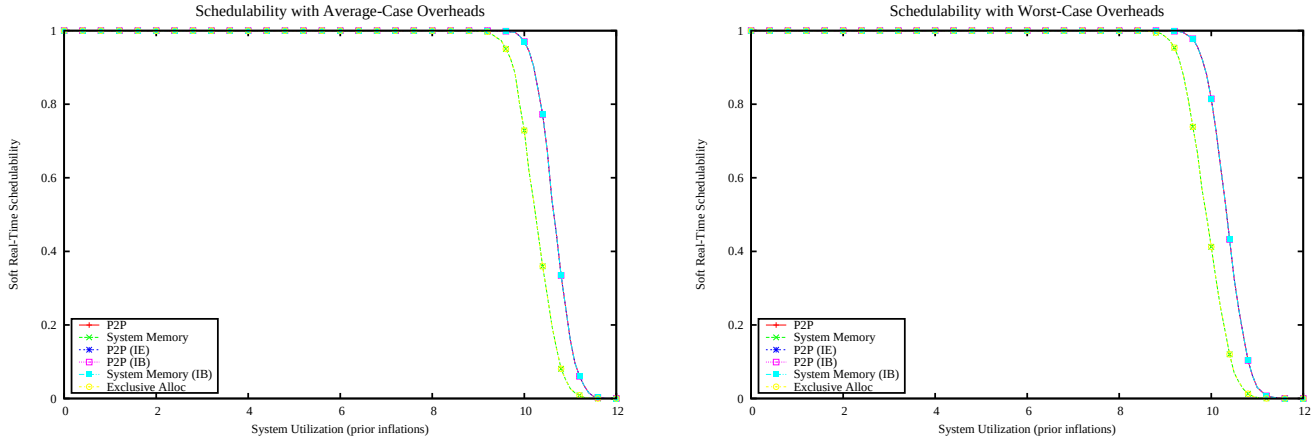

Figure 2149: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

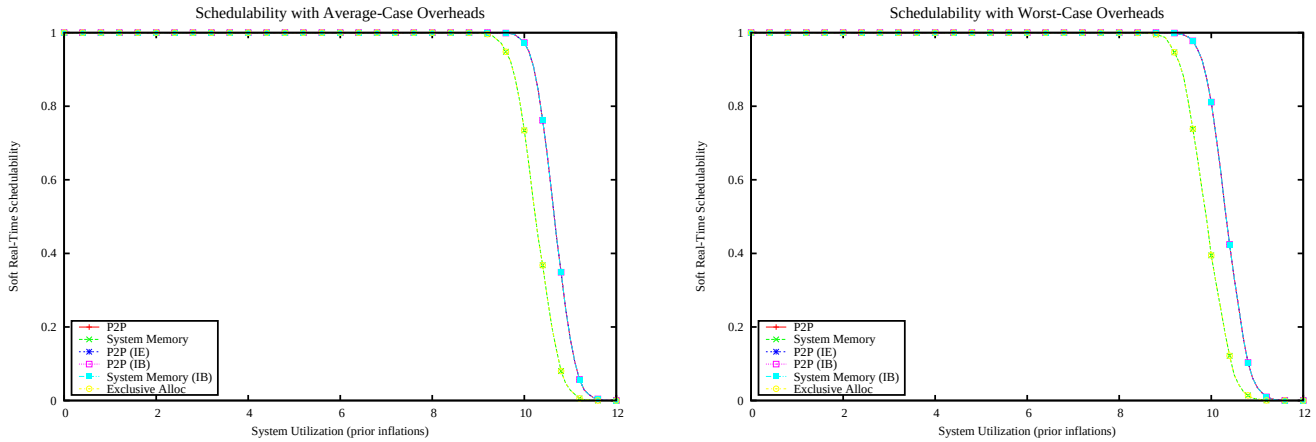

Figure 2150: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

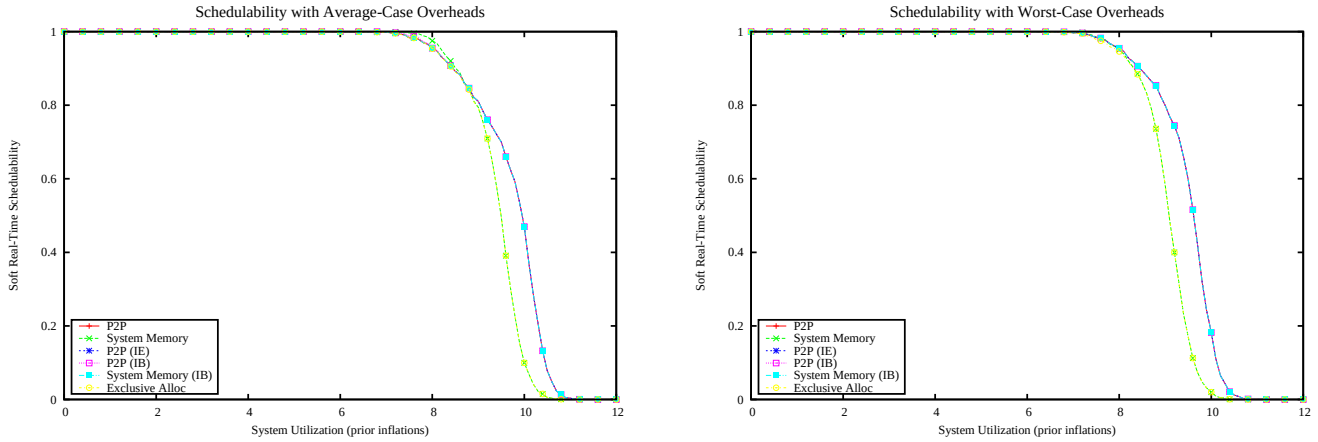

Figure 2151: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

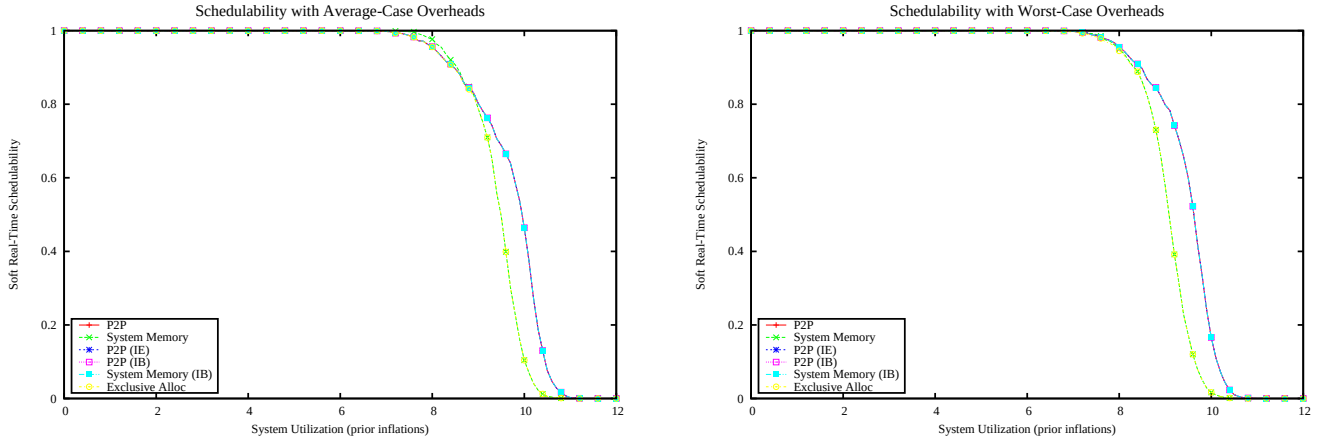

Figure 2152: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

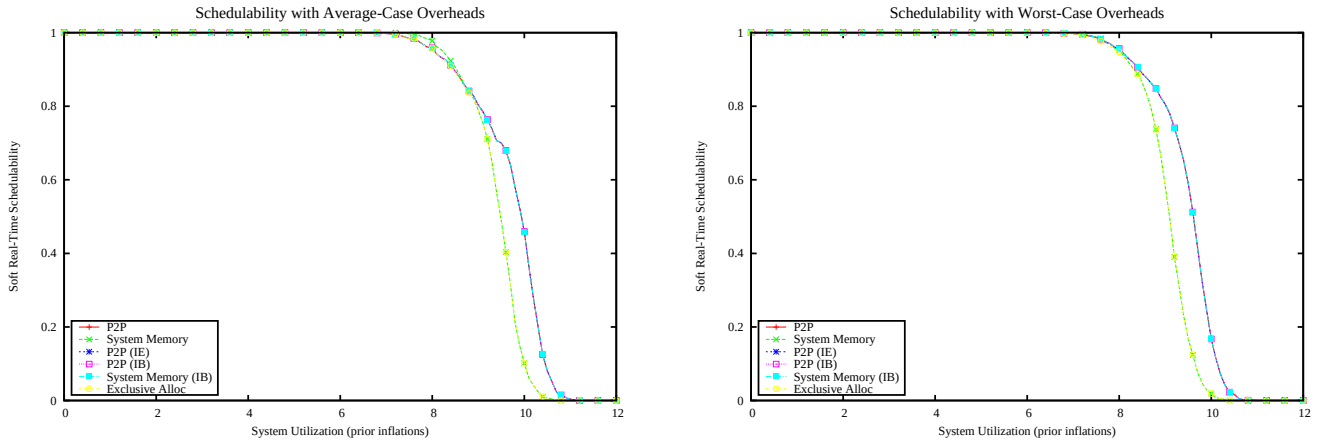

Figure 2153: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

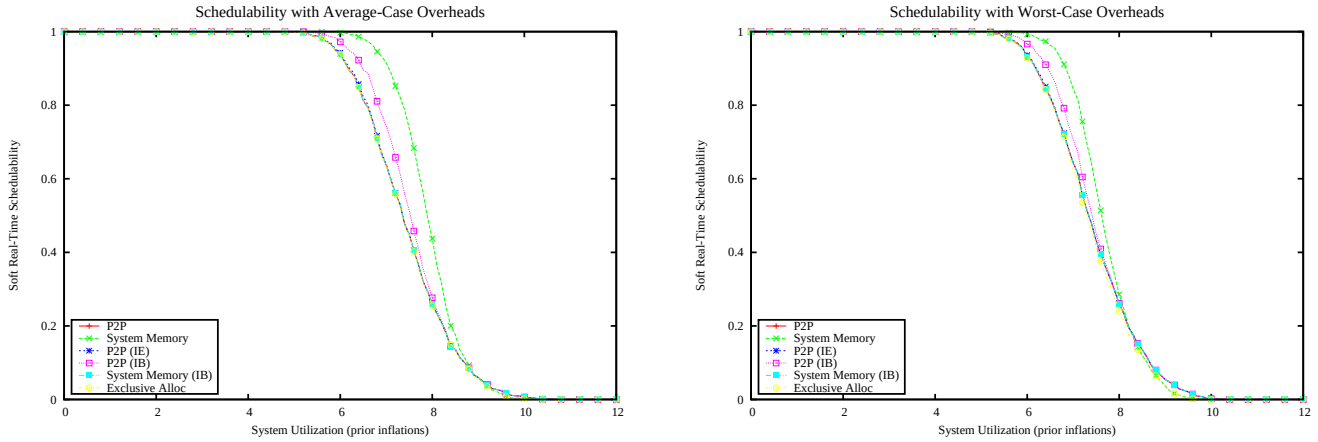

Figure 2154: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

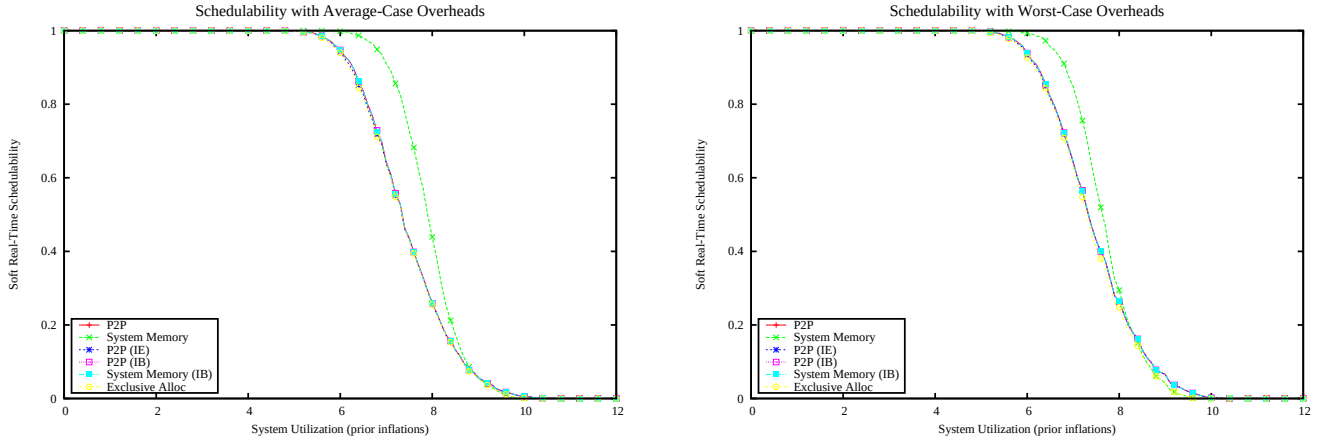

Figure 2155: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

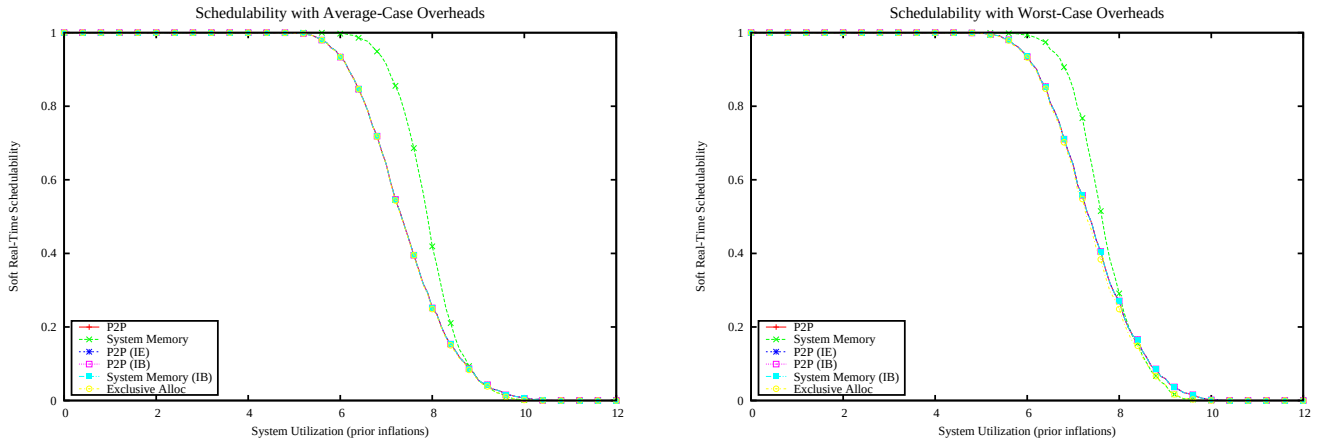

Figure 2156: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

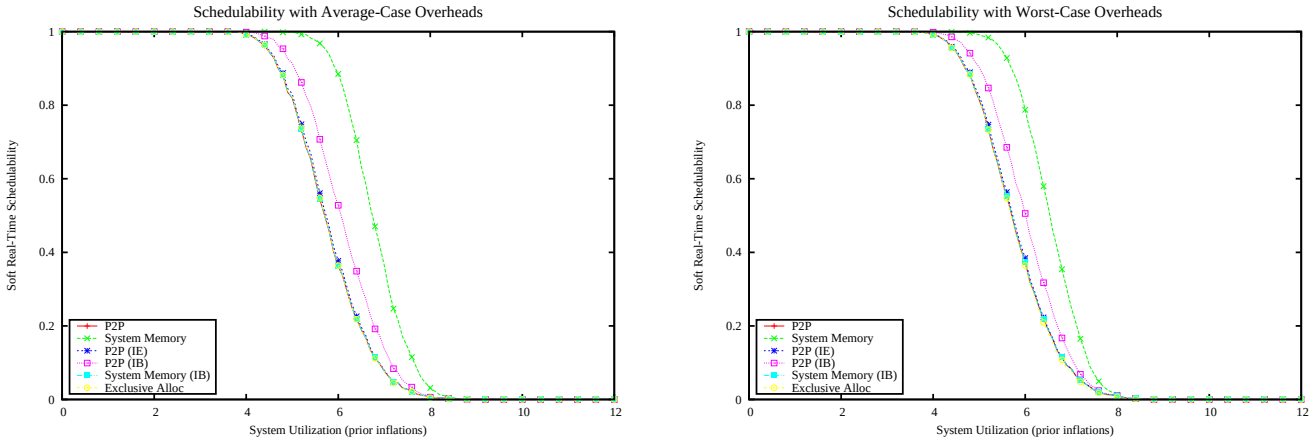

Figure 2157: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

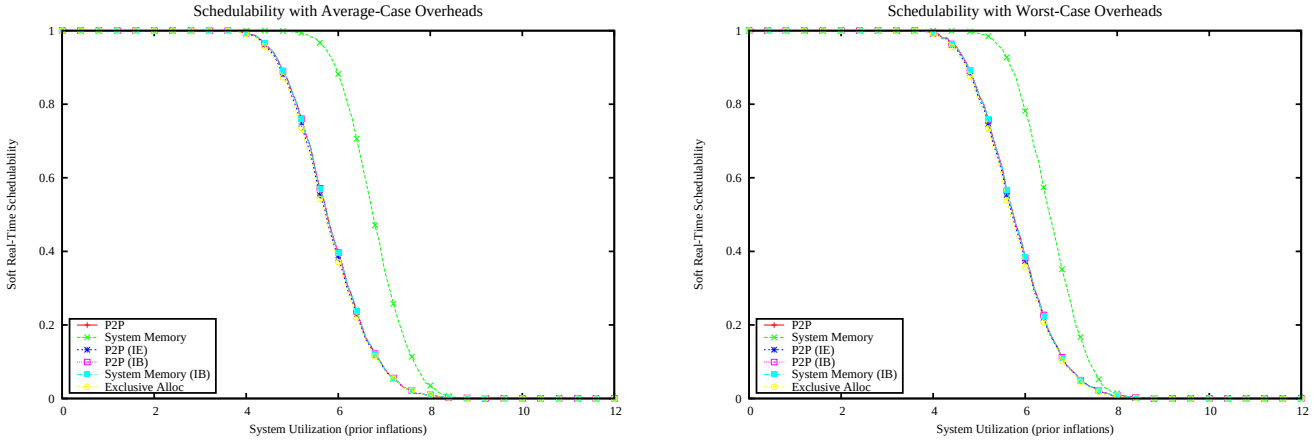

Figure 2158: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

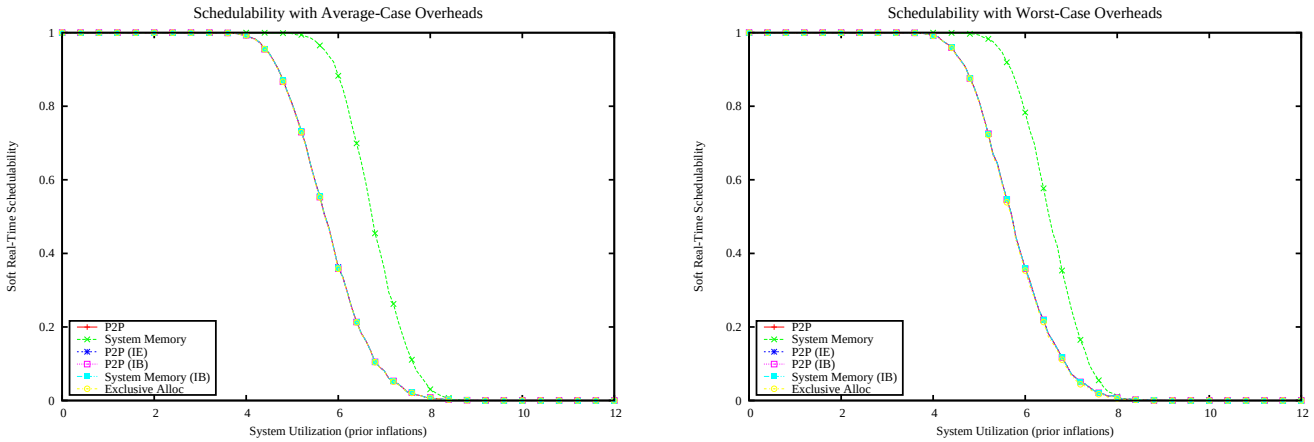

Figure 2159: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

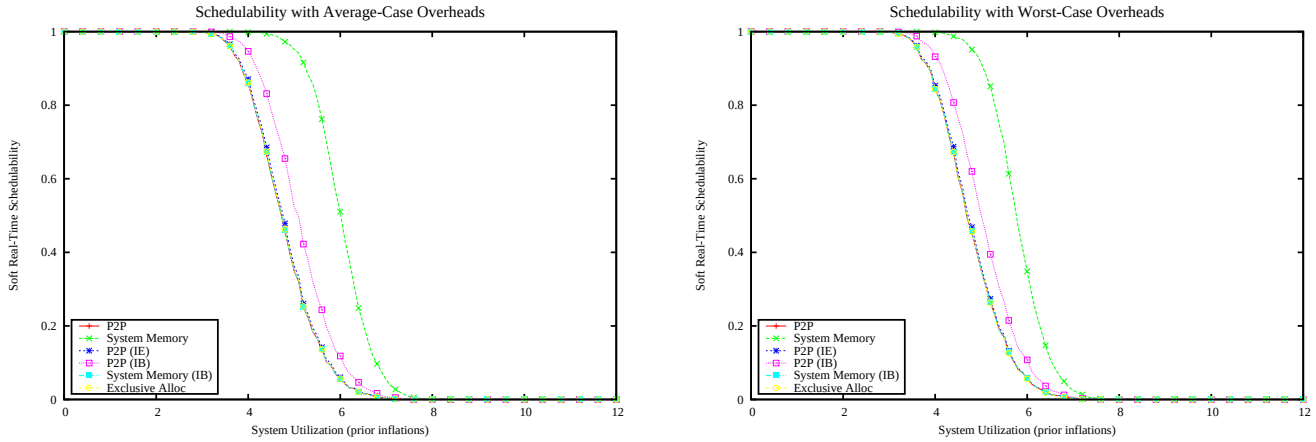

Figure 2160: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

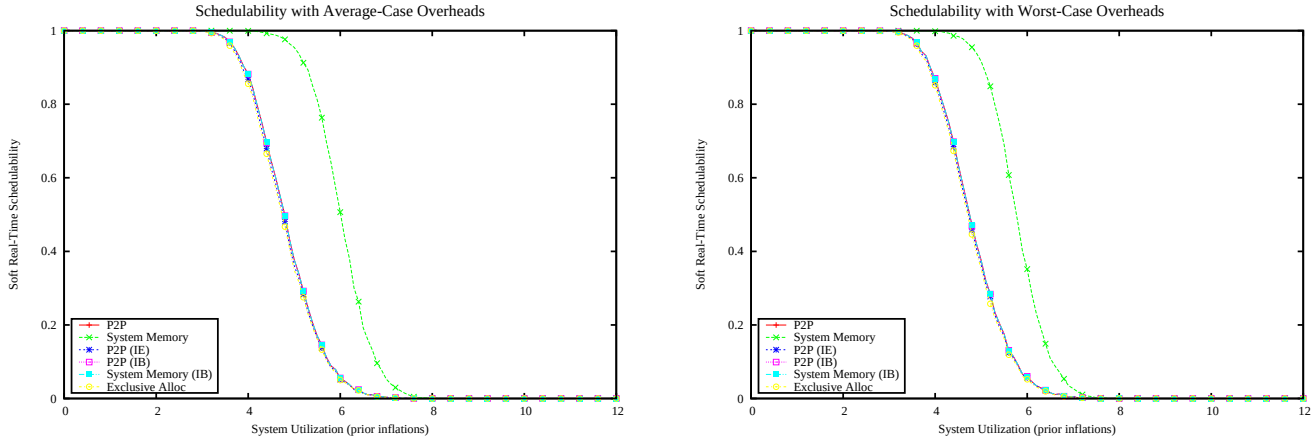

Figure 2161: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

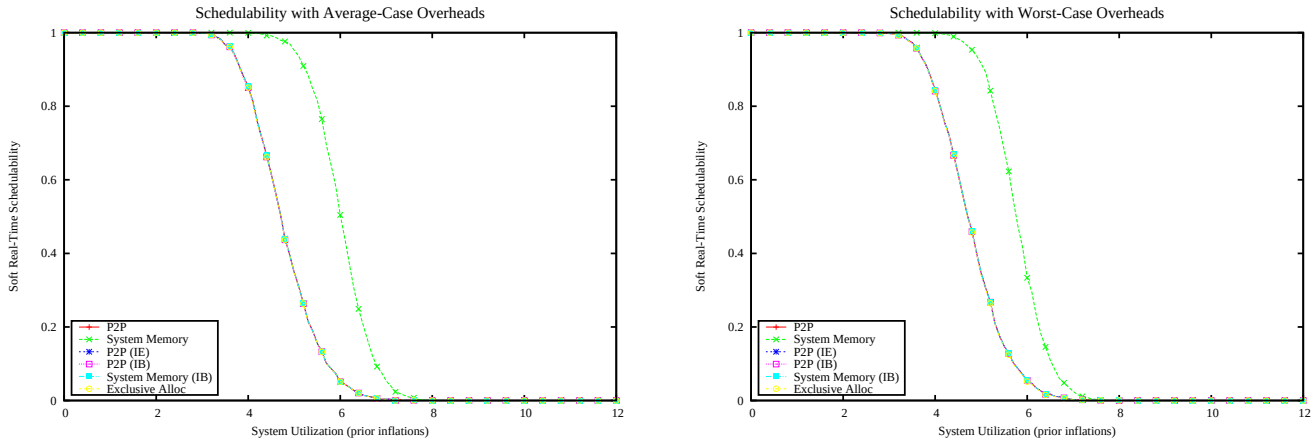

Figure 2162: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

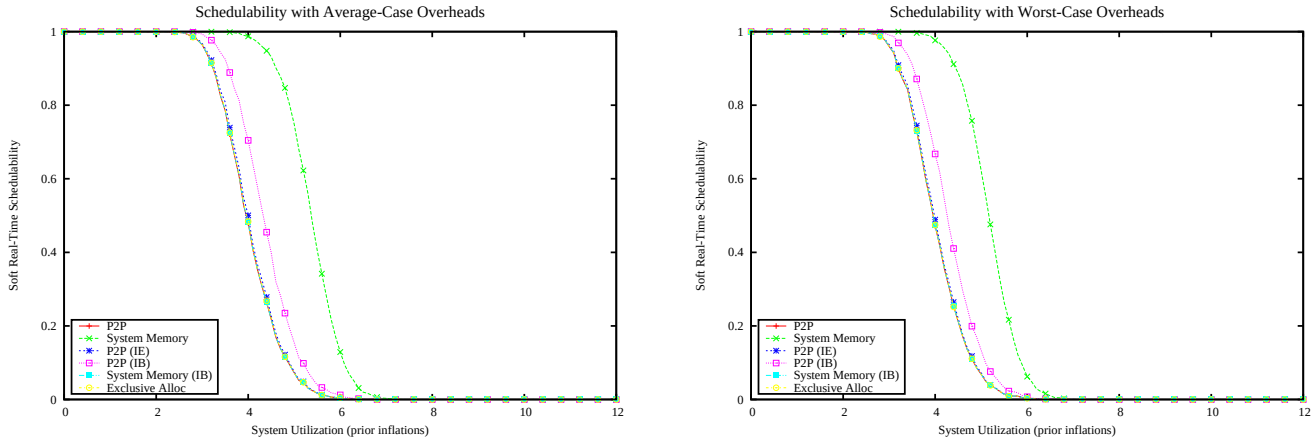

Figure 2163: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

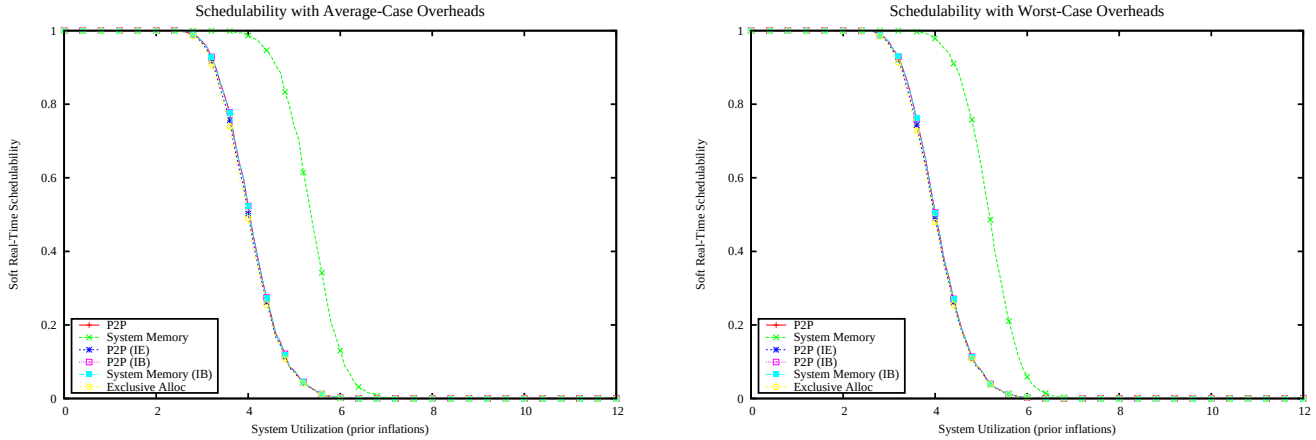

Figure 2164: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

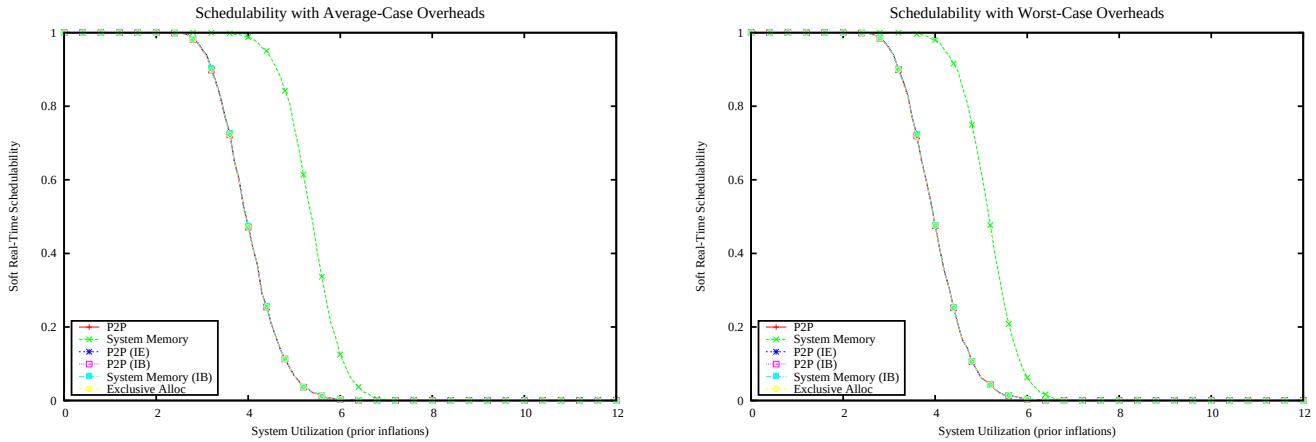

Figure 2165: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

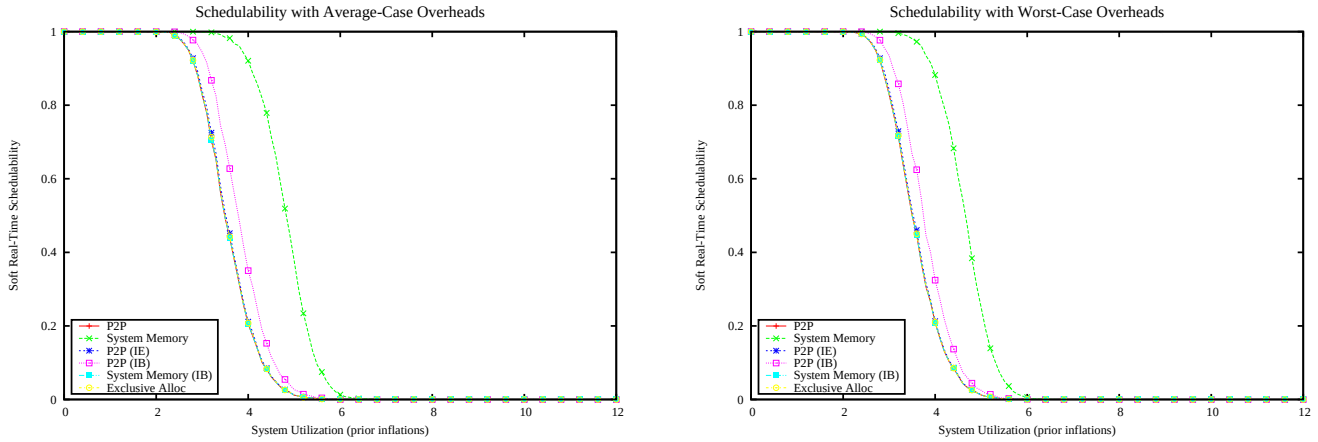

Figure 2166: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

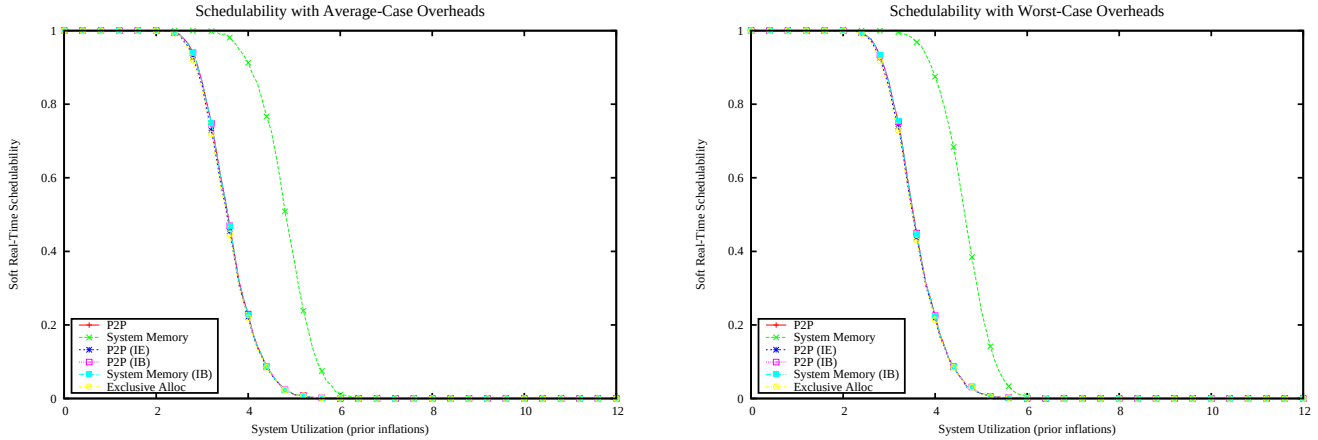

Figure 2167: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

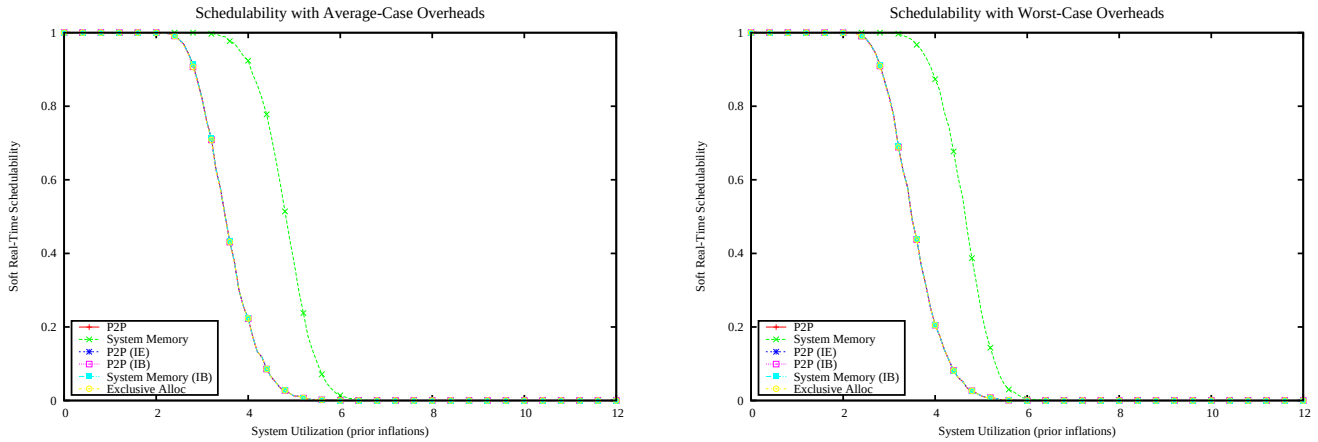

Figure 2168: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

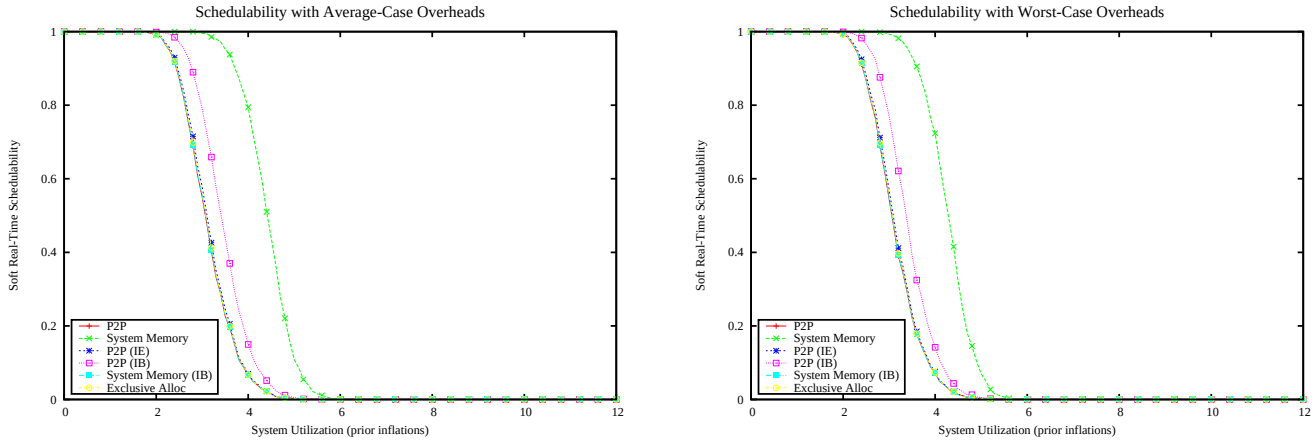

Figure 2169: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

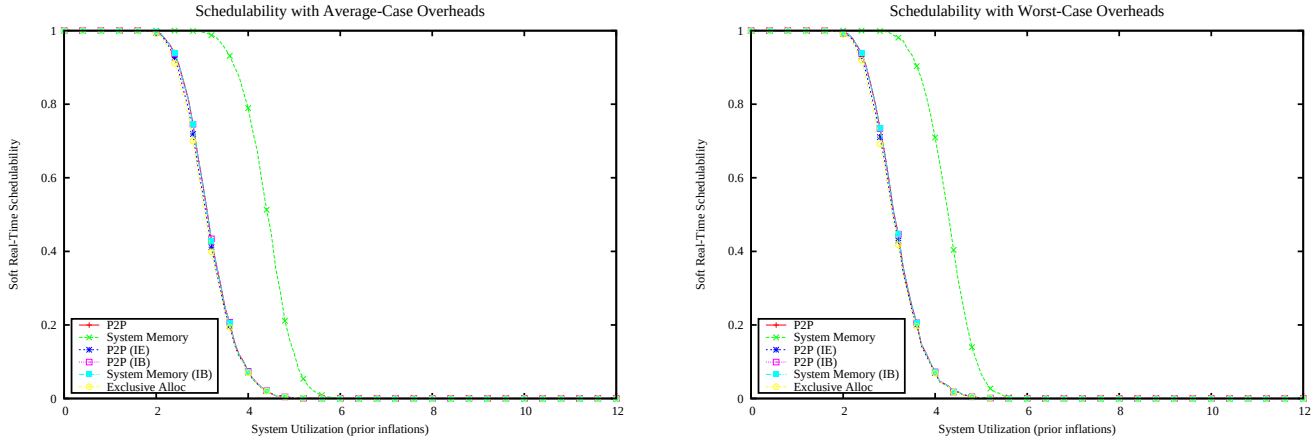

Figure 2170: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

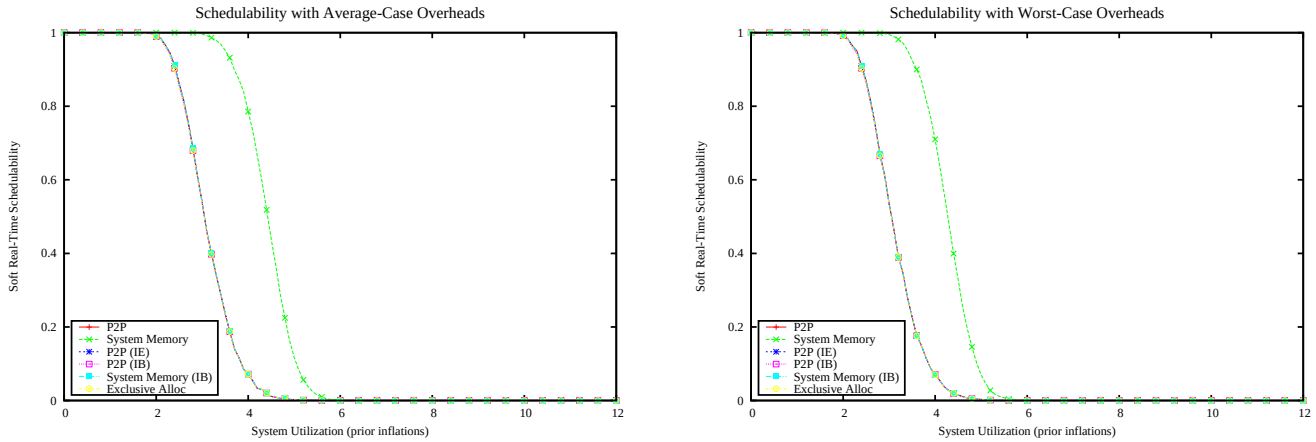

Figure 2171: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

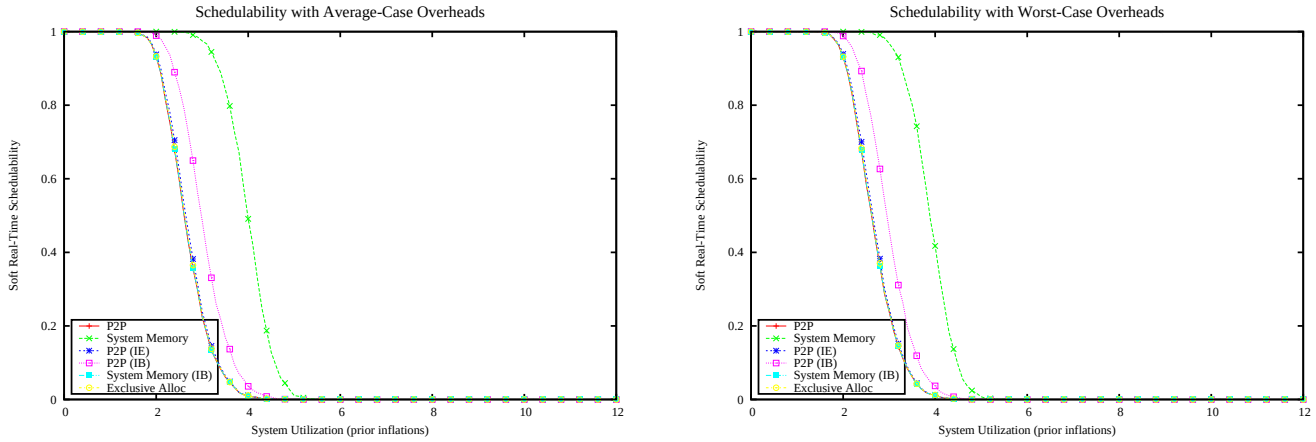

Figure 2172: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

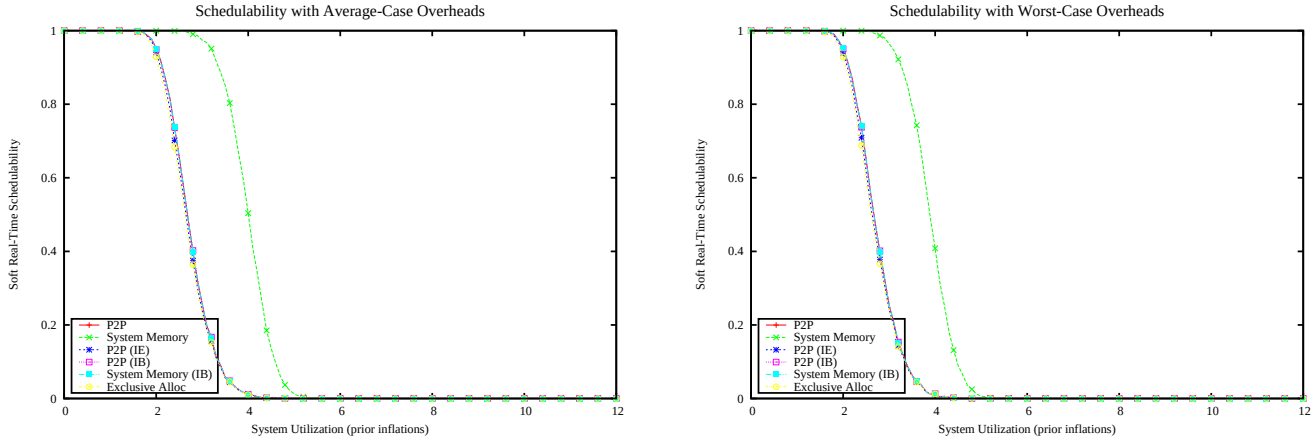

Figure 2173: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

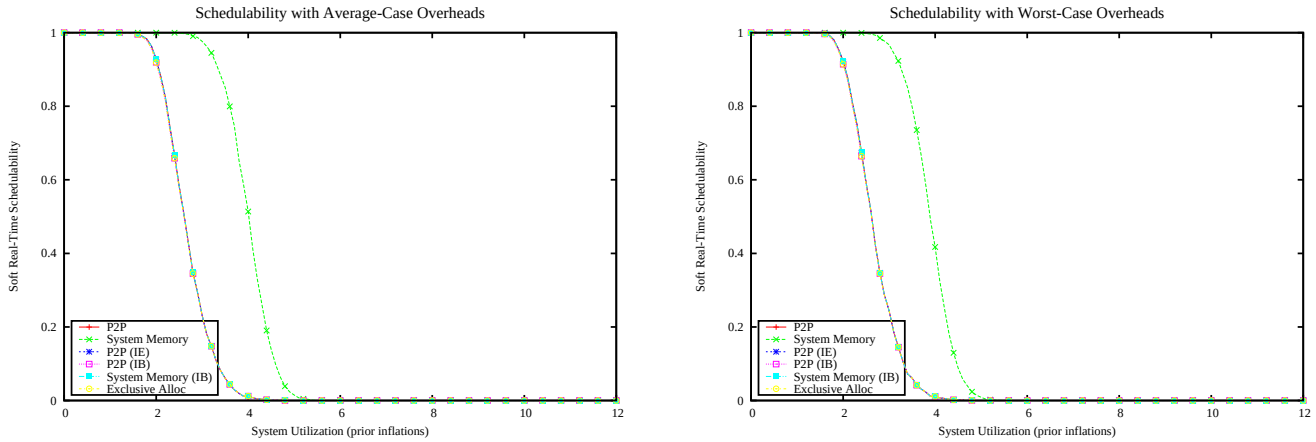

Figure 2174: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

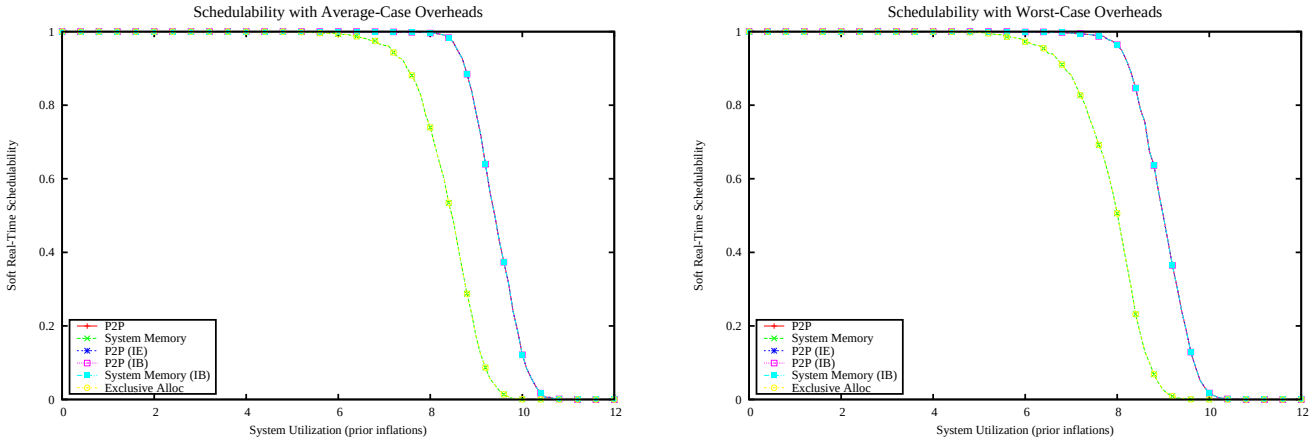

Figure 2175: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

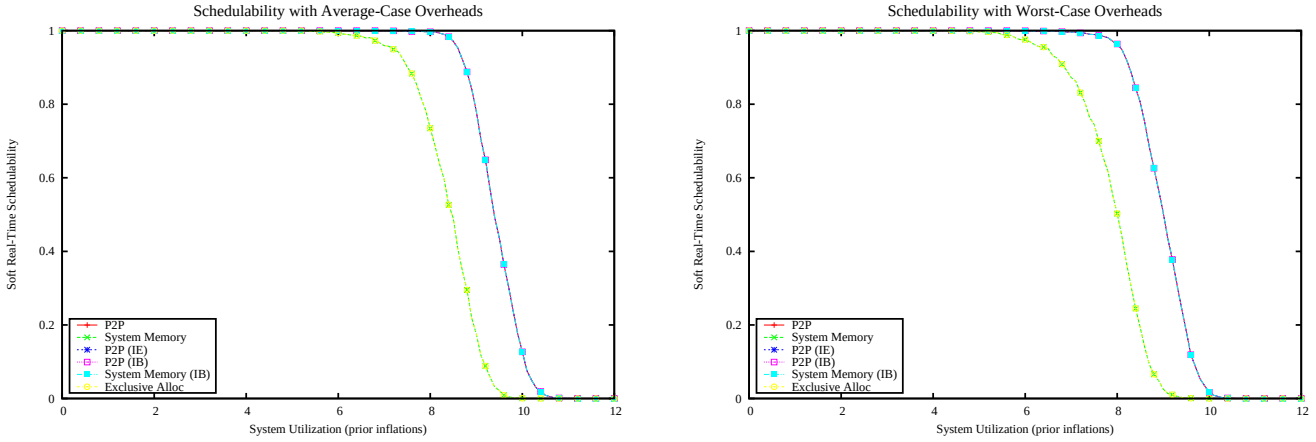

Figure 2176: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

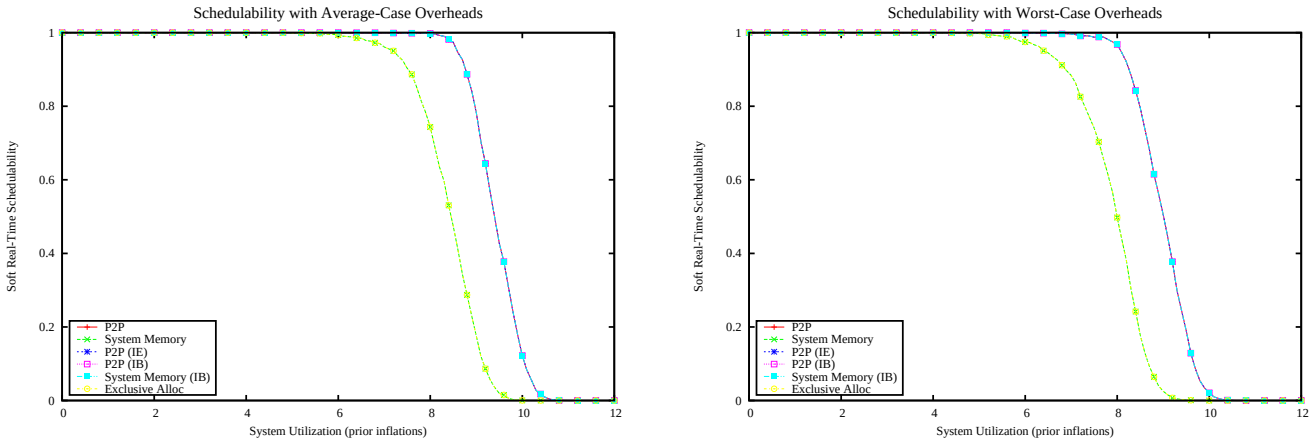

Figure 2177: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

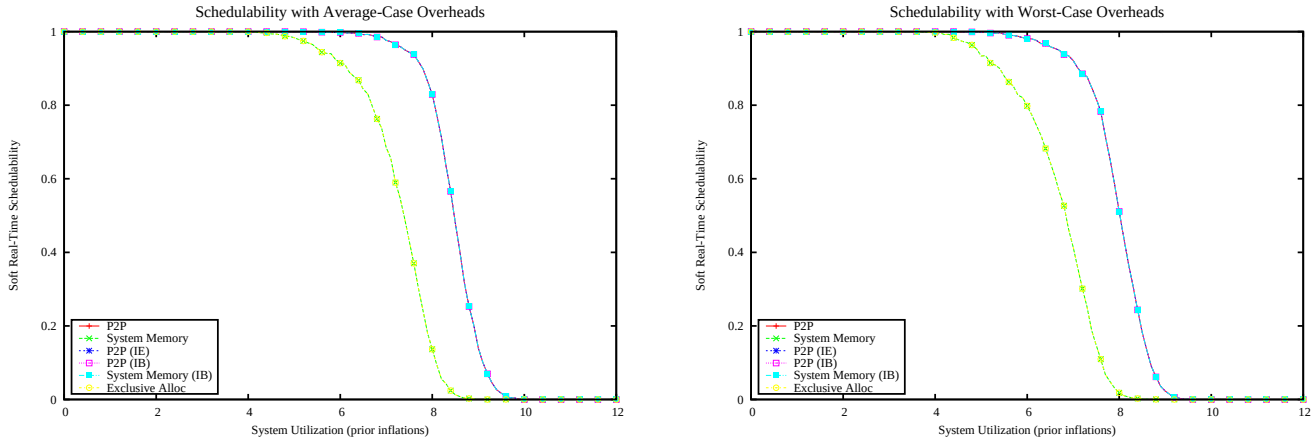

Figure 2178: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

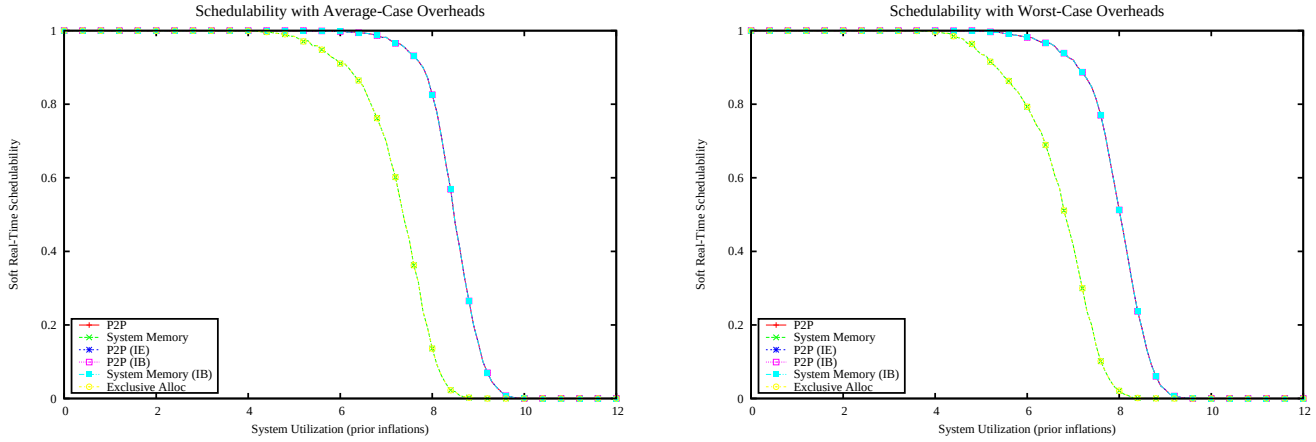

Figure 2179: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

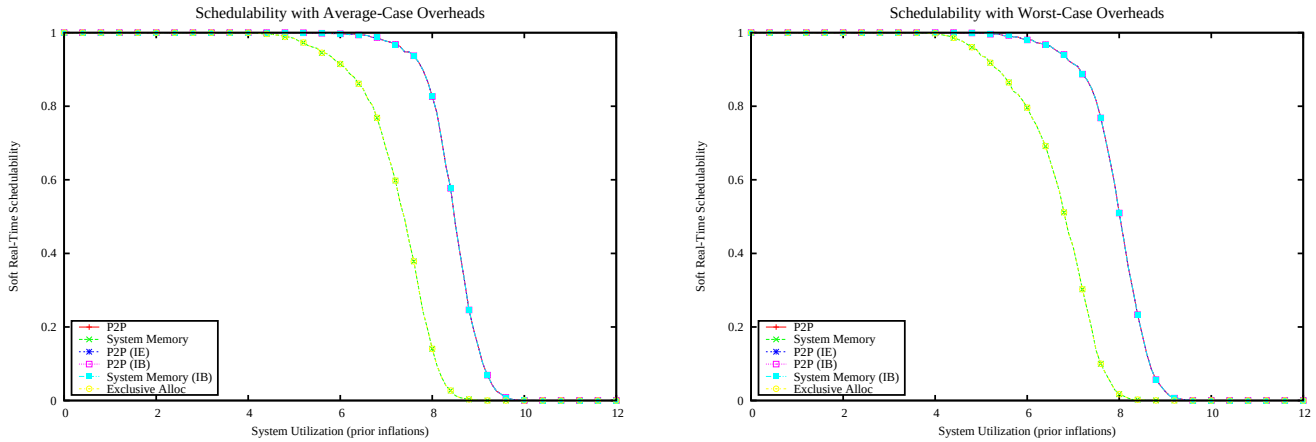

Figure 2180: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

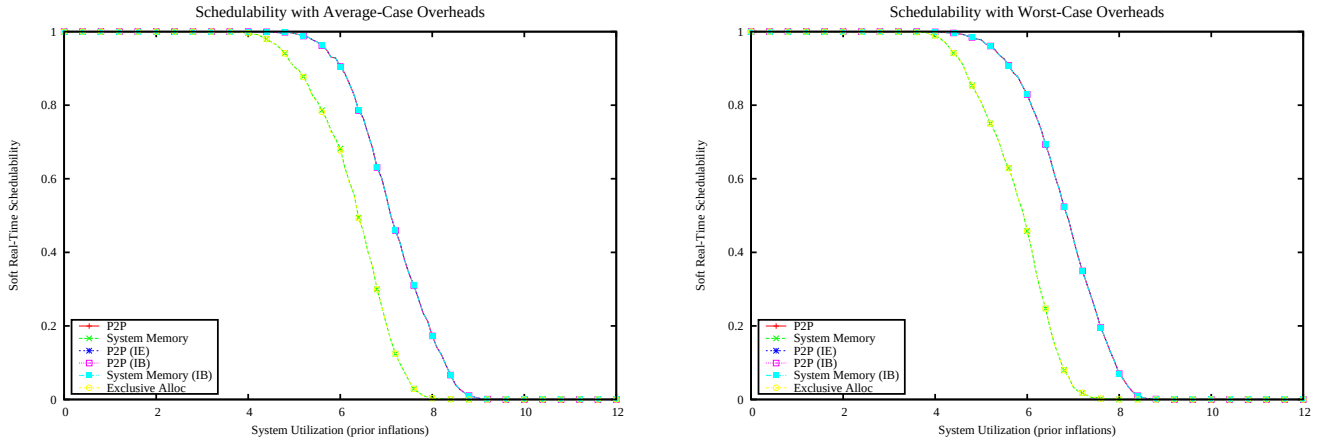

Figure 2181: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

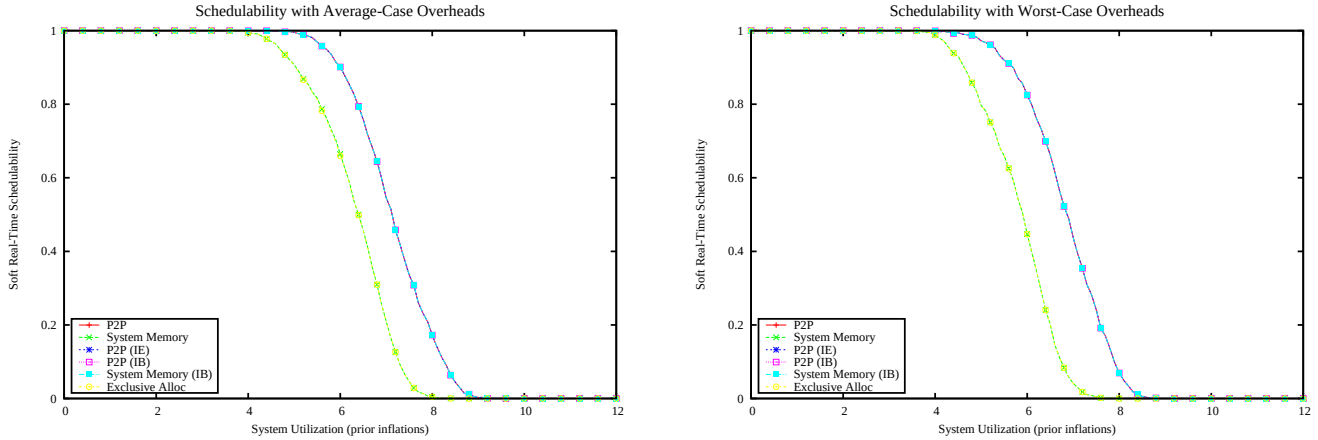

Figure 2182: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

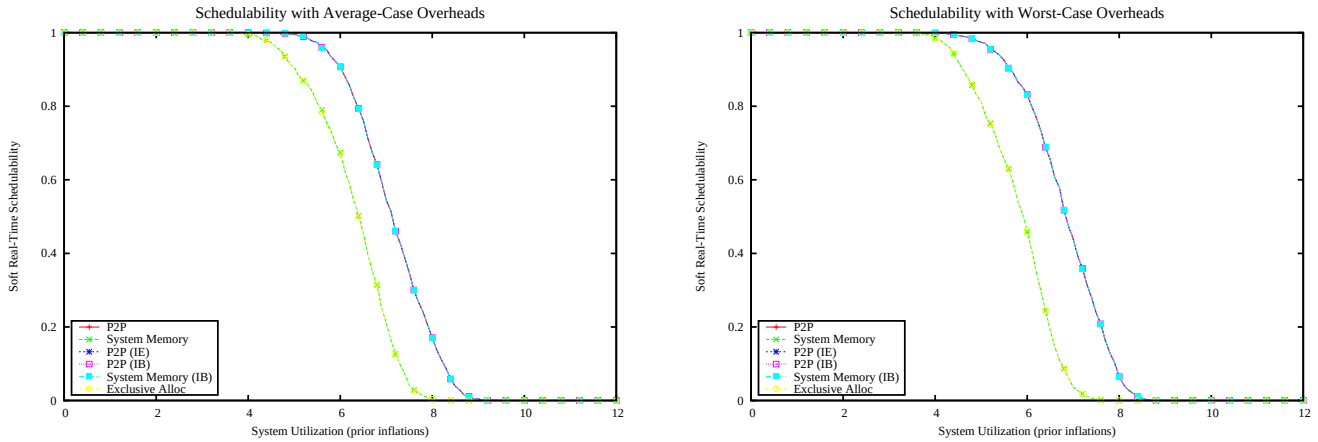

Figure 2183: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

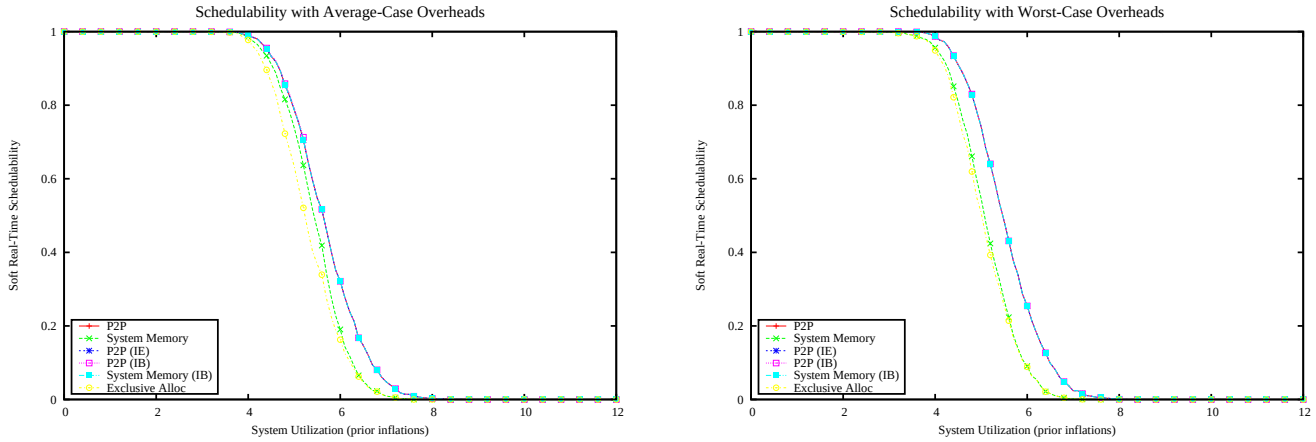

Figure 2184: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

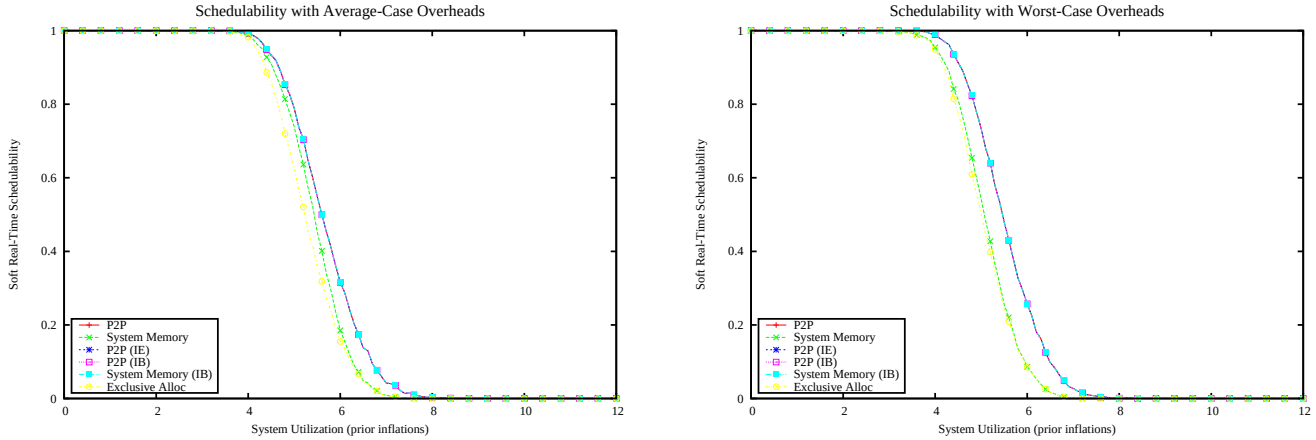

Figure 2185: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

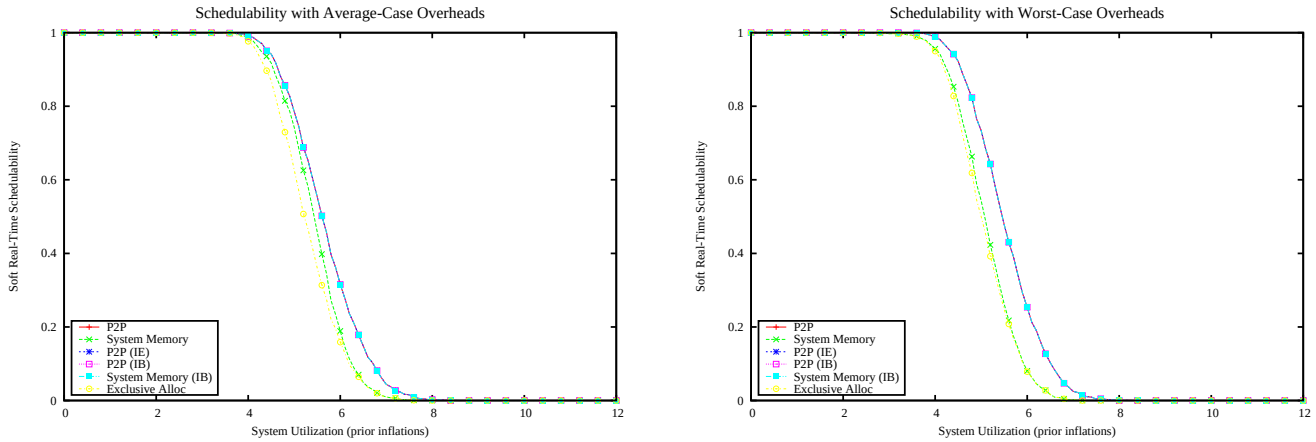

Figure 2186: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

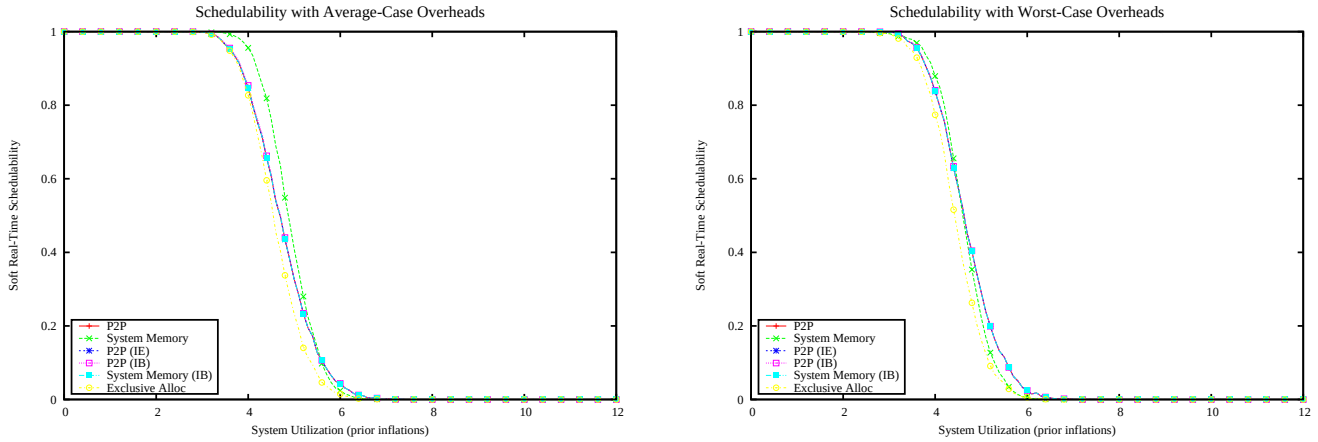

Figure 2187: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

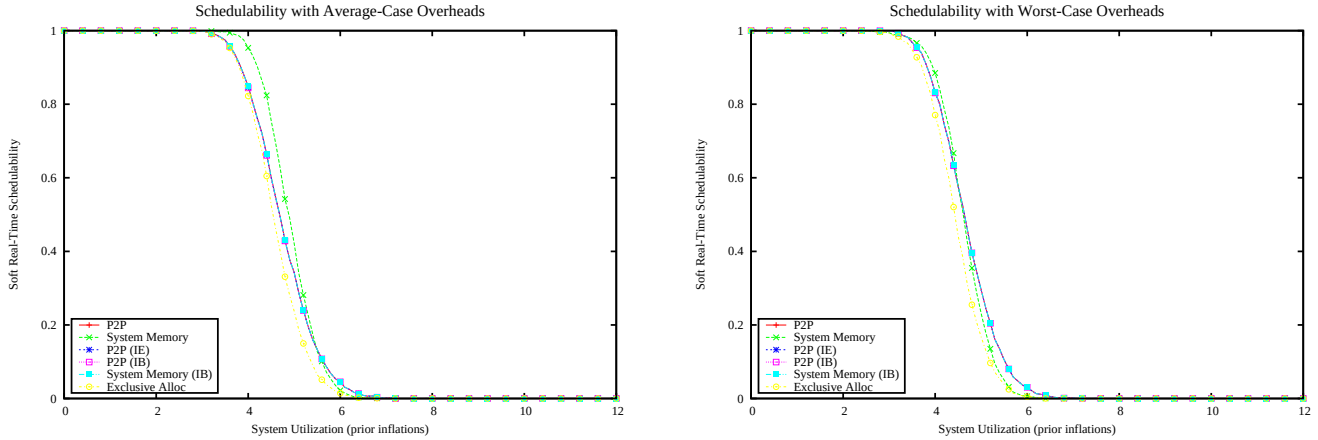

Figure 2188: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

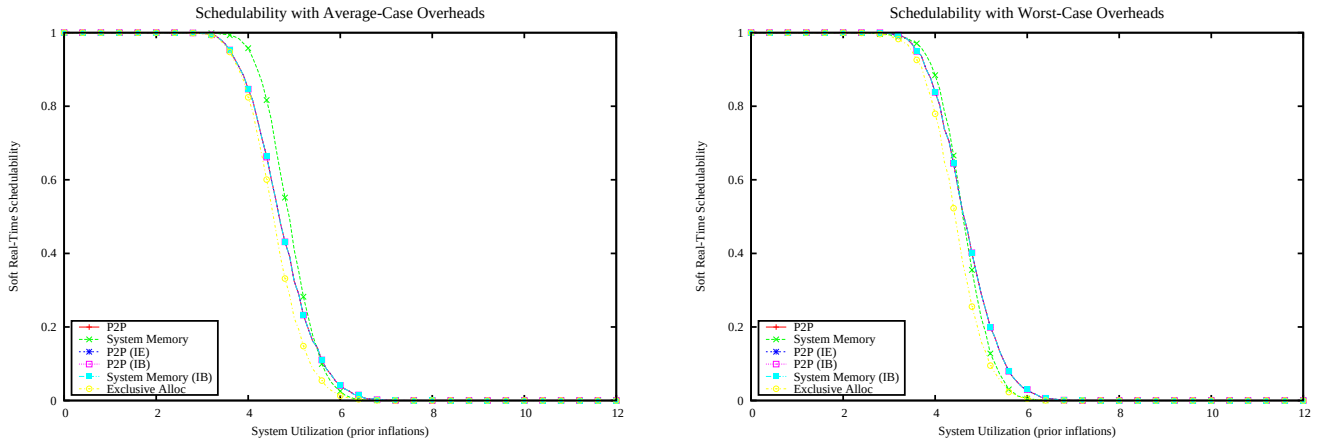

Figure 2189: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

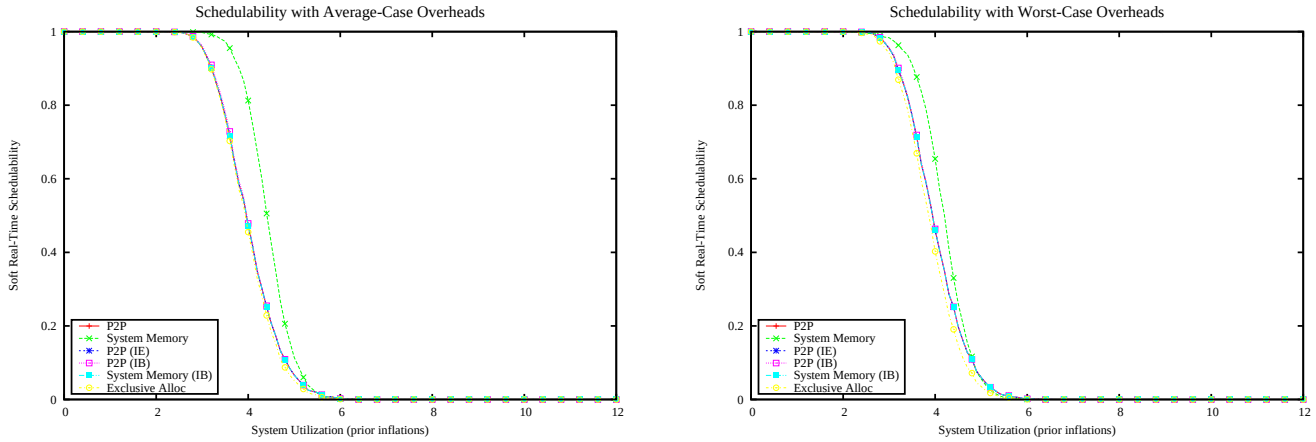

Figure 2190: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

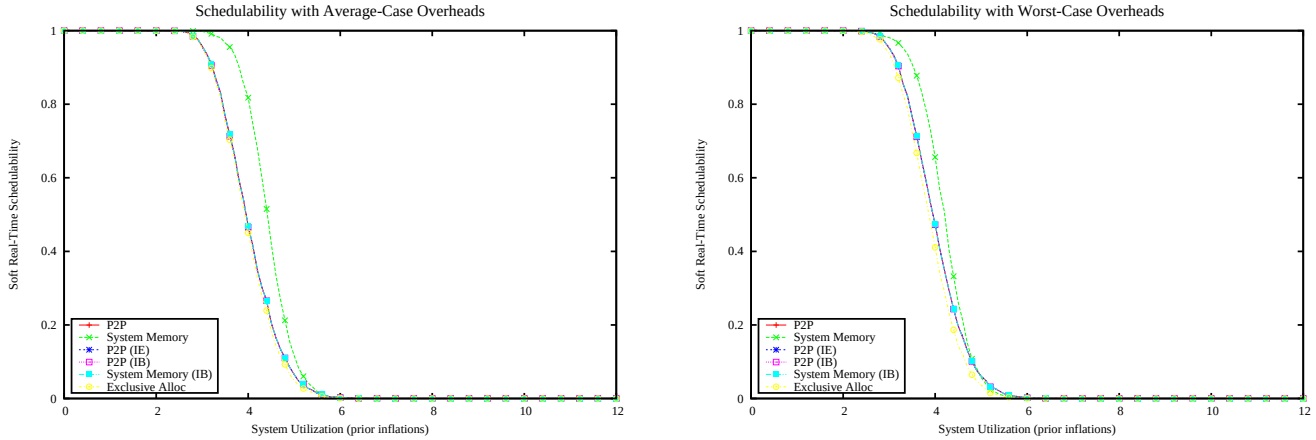

Figure 2191: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

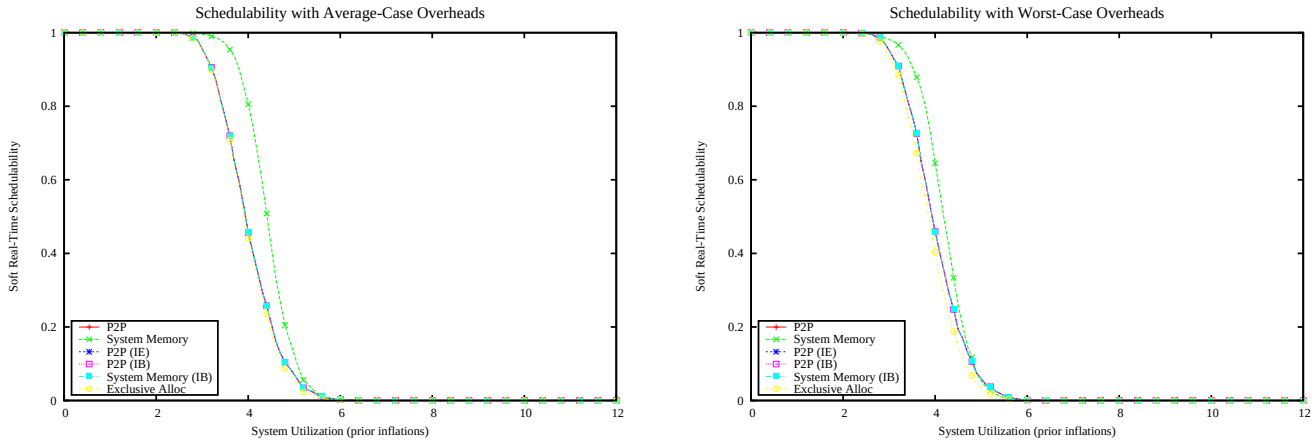

Figure 2192: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

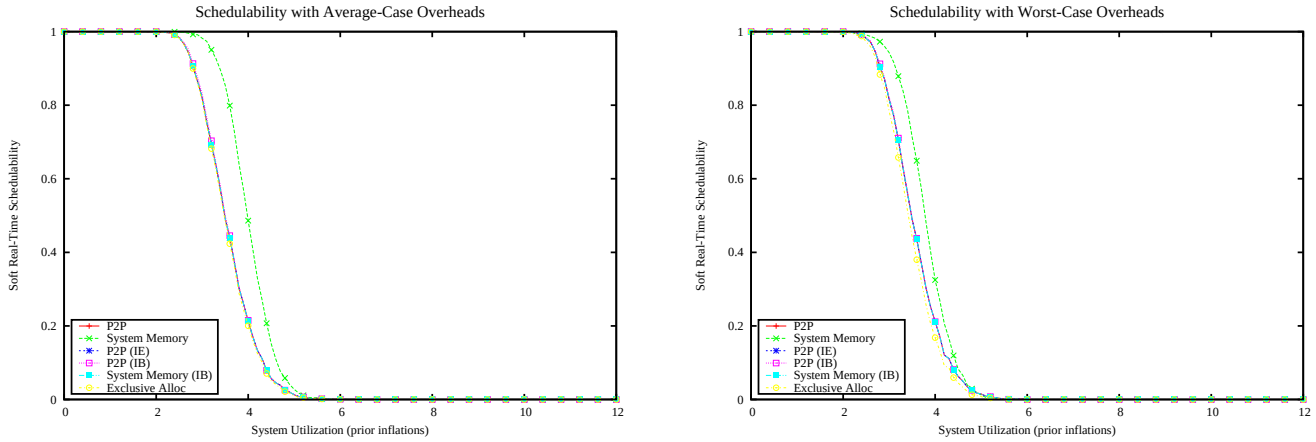

Figure 2193: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

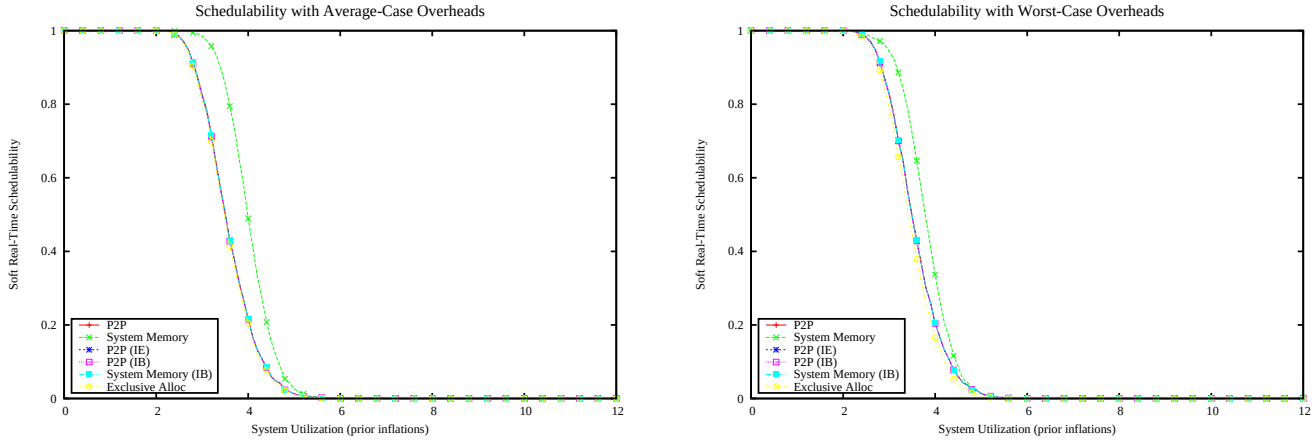

Figure 2194: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

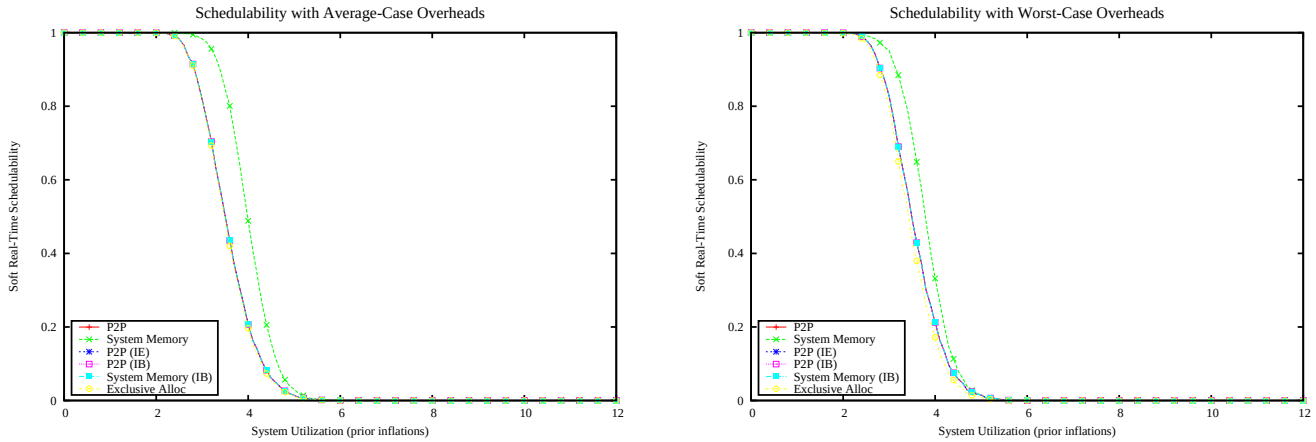

Figure 2195: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

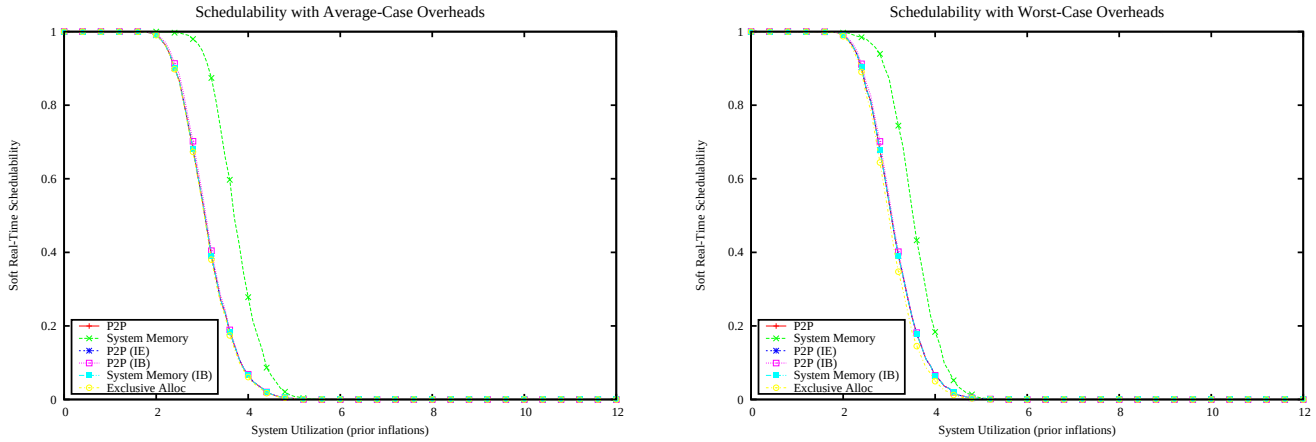

Figure 2196: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

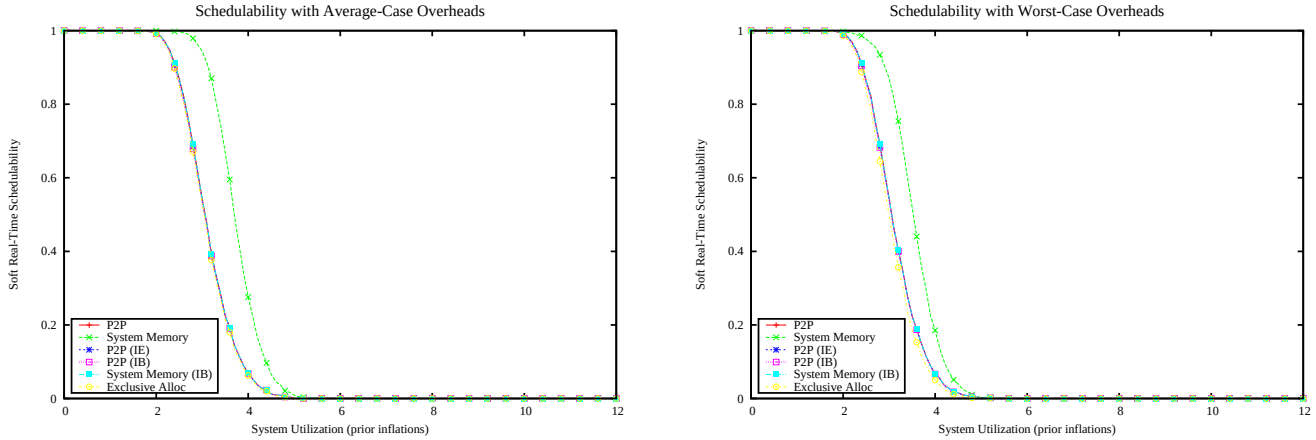

Figure 2197: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

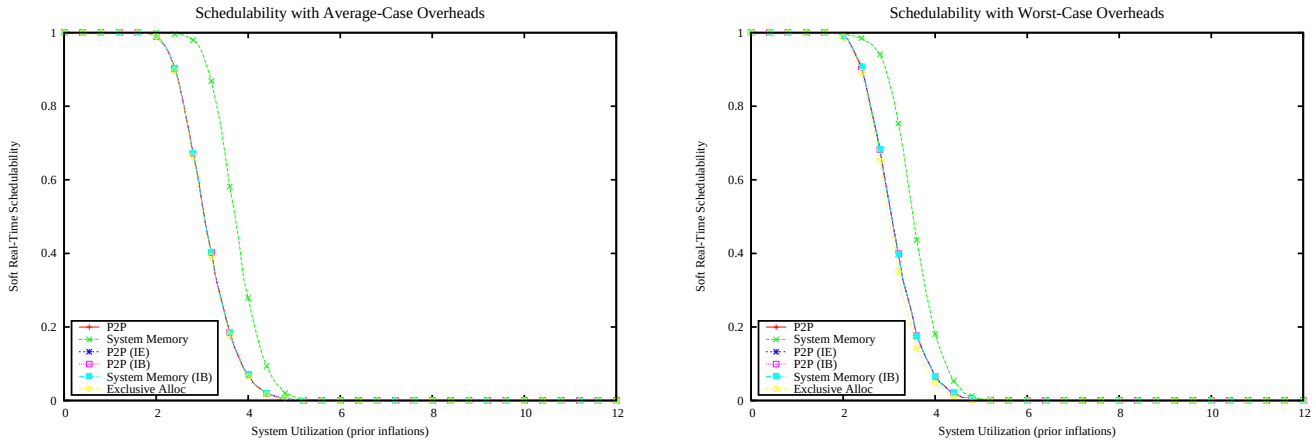

Figure 2198: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

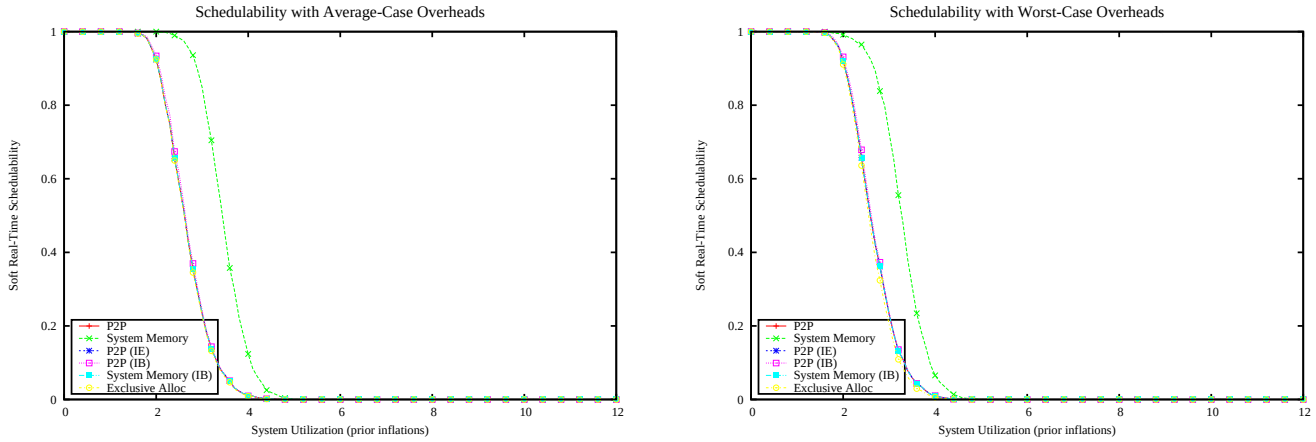

Figure 2199: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

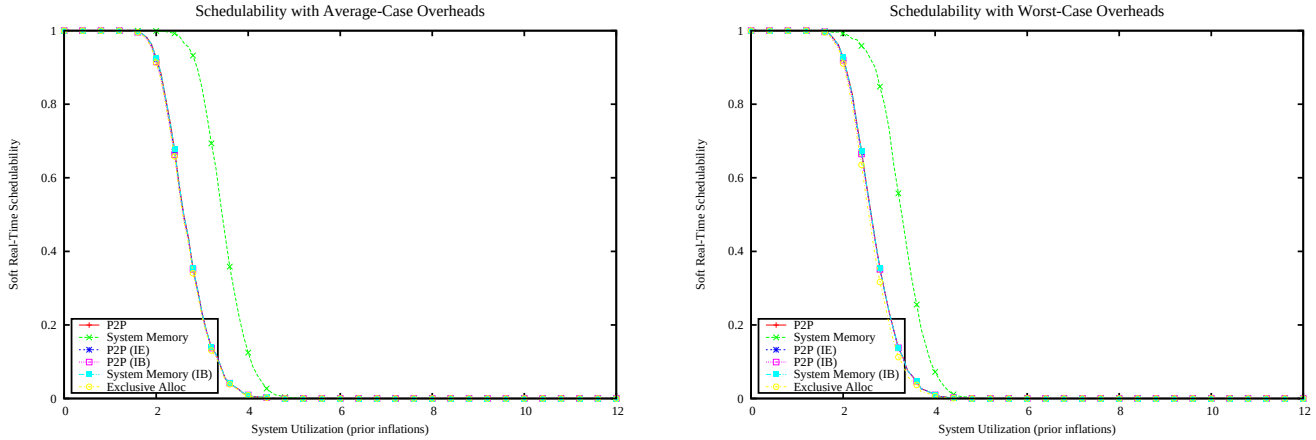

Figure 2200: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

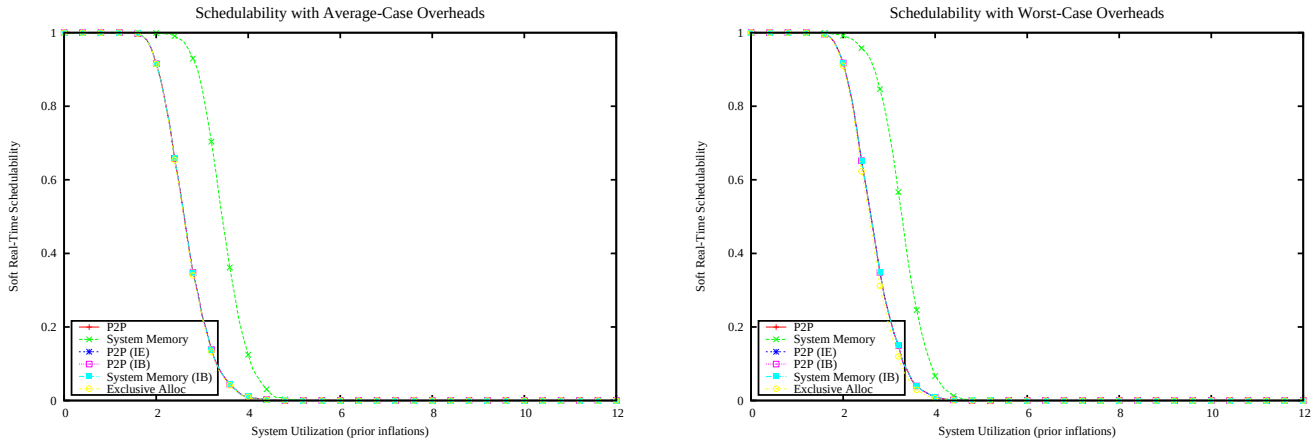

Figure 2201: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

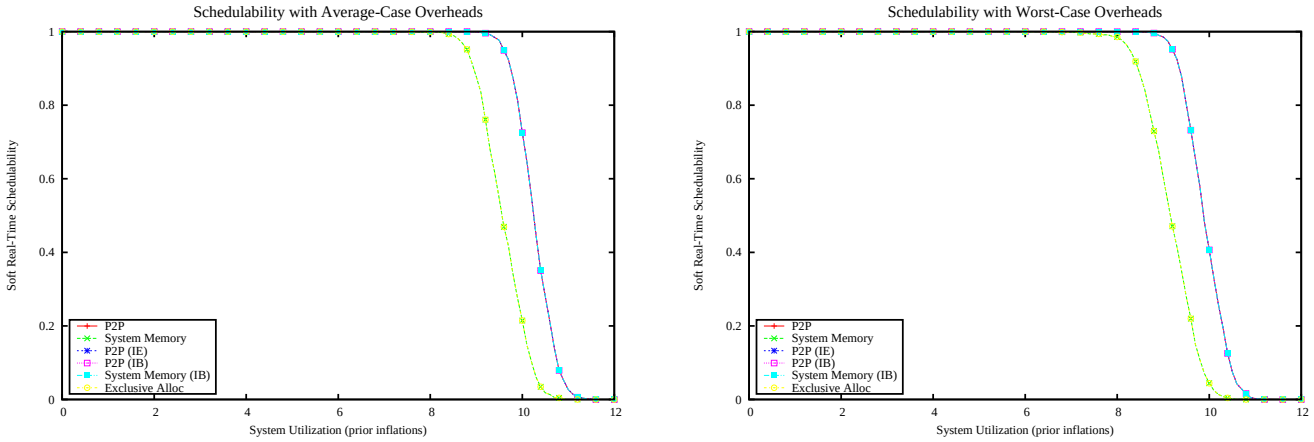

Figure 2202: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

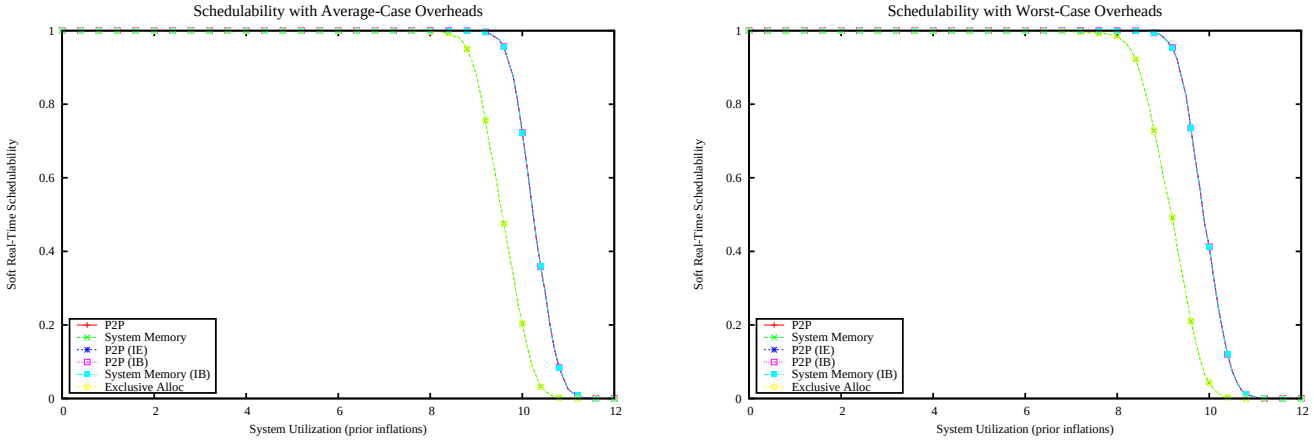

Figure 2203: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

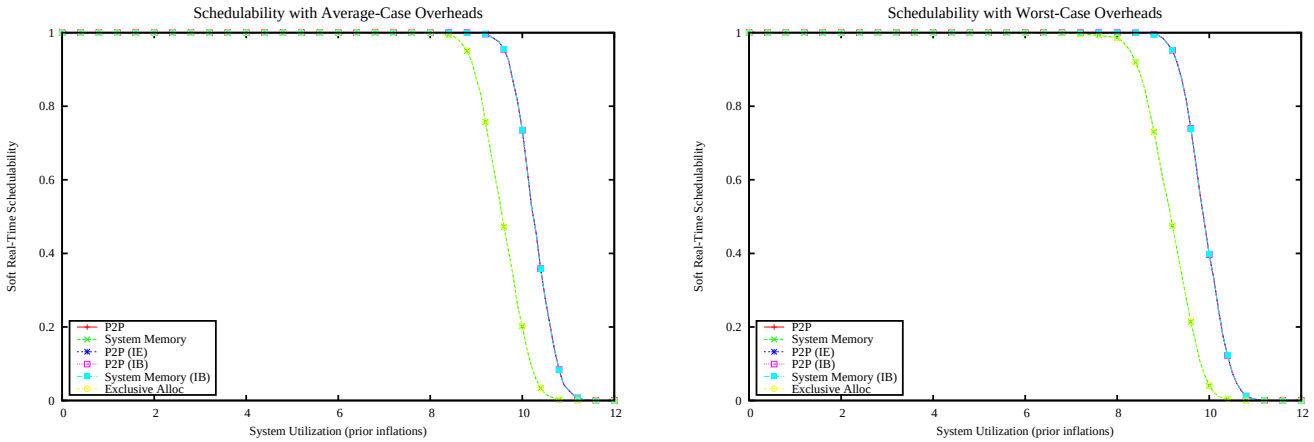

Figure 2204: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

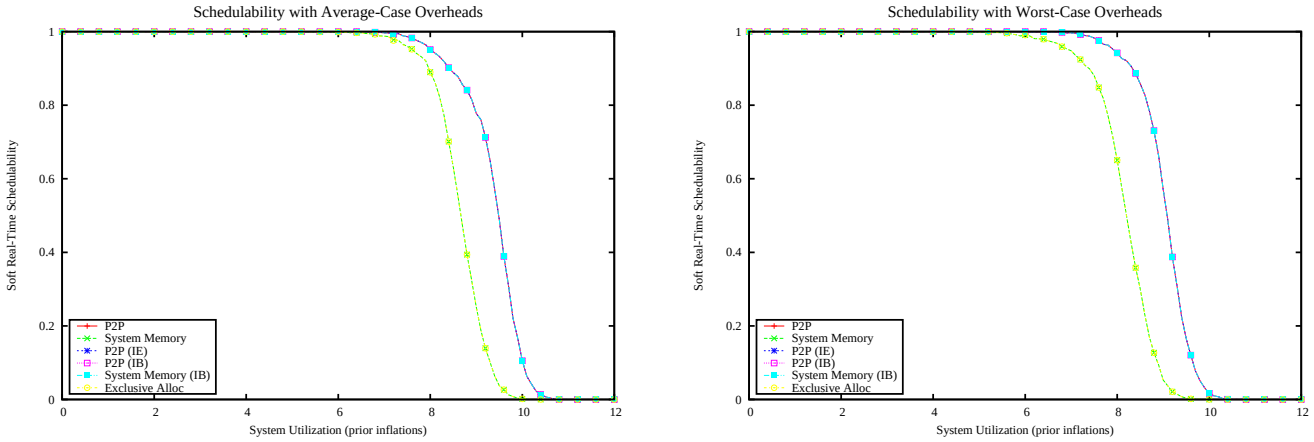

Figure 2205: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

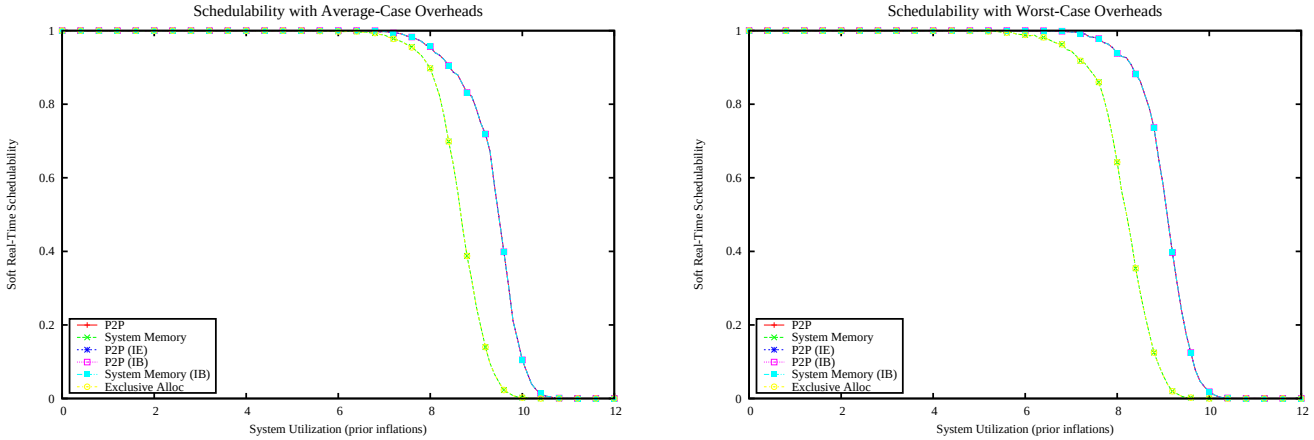

Figure 2206: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

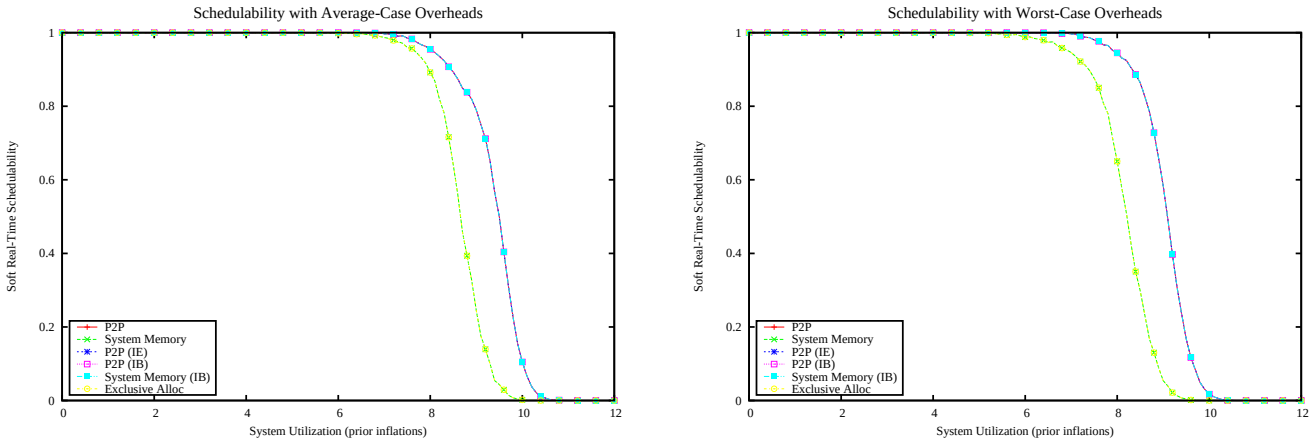

Figure 2207: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

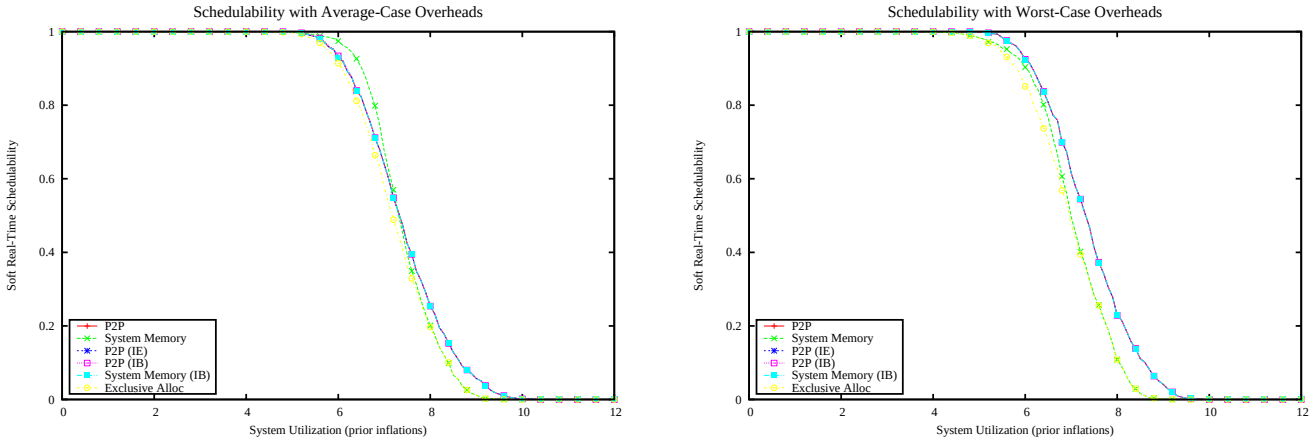

Figure 2208: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

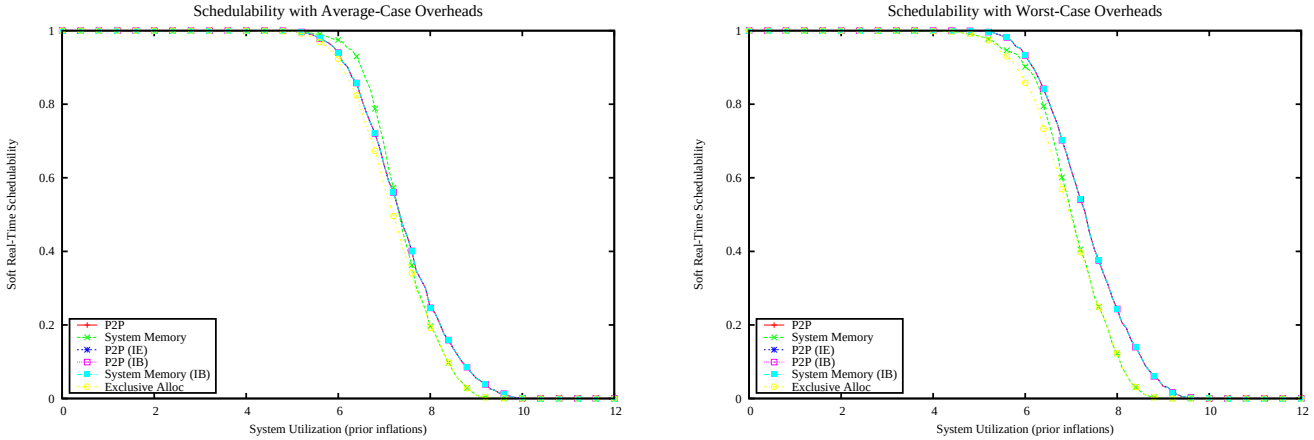

Figure 2209: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

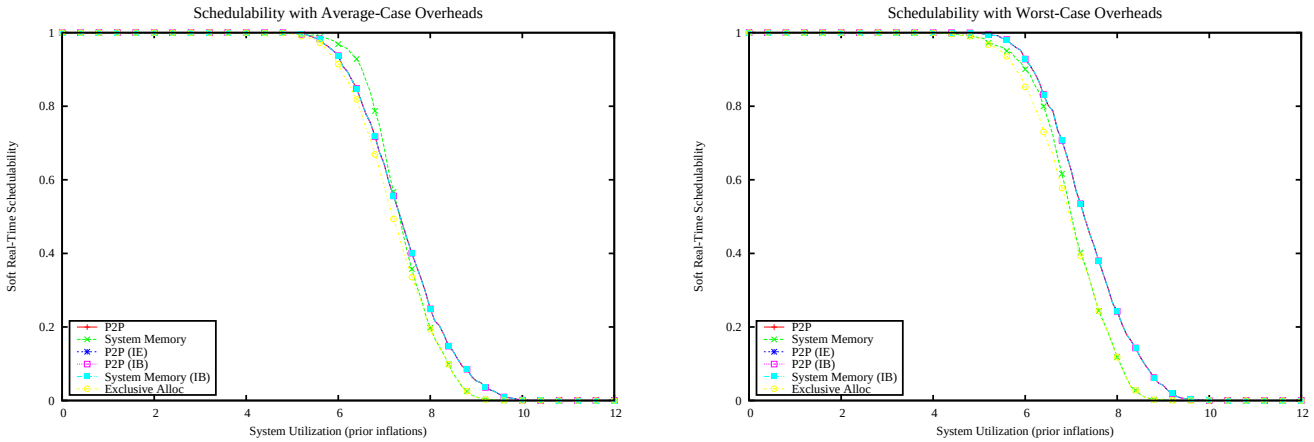

Figure 2210: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

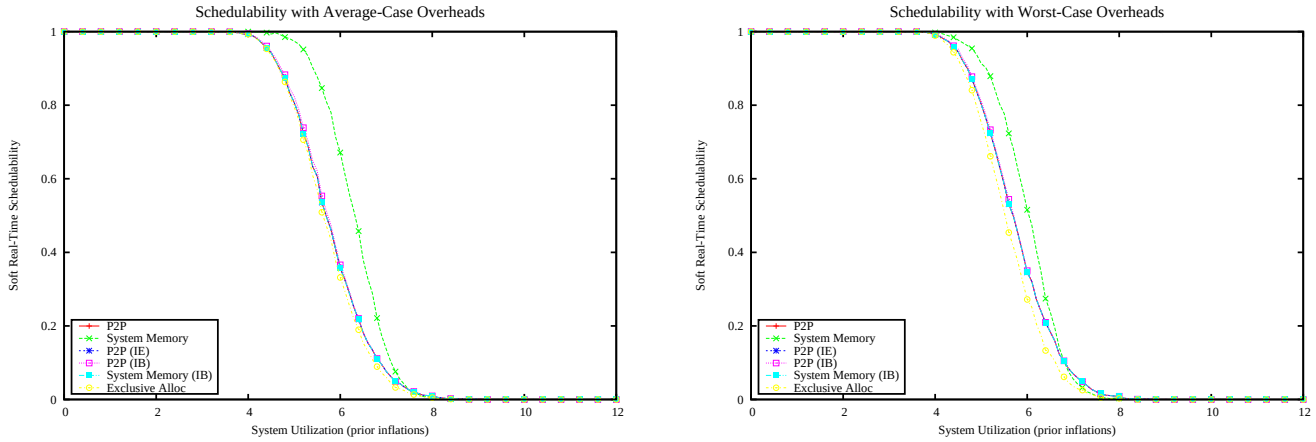

Figure 2211: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

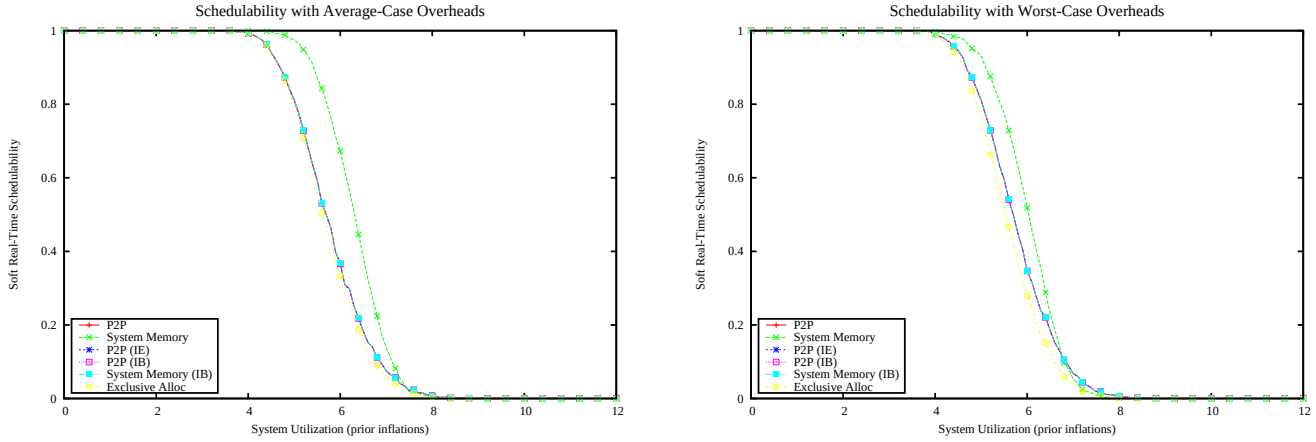

Figure 2212: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

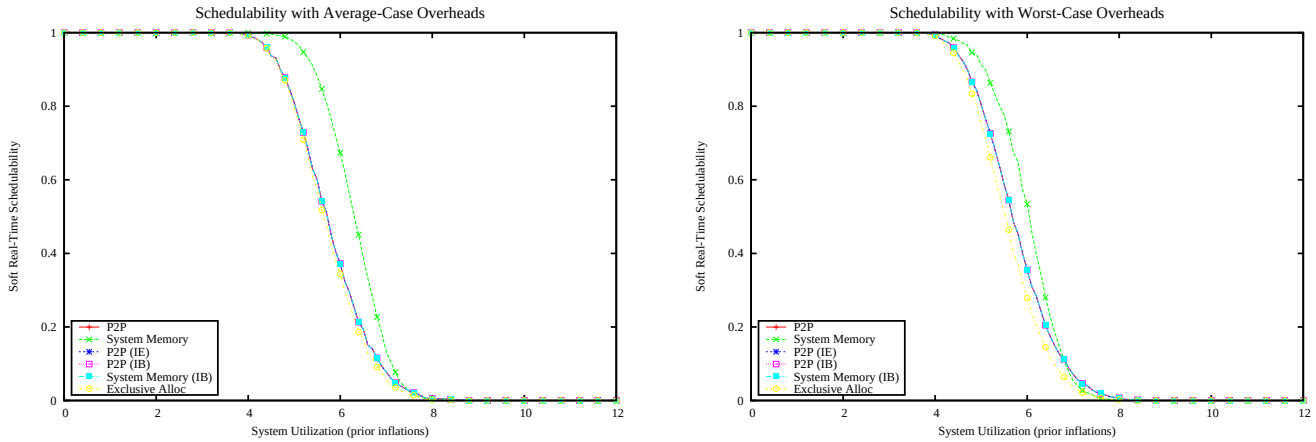

Figure 2213: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

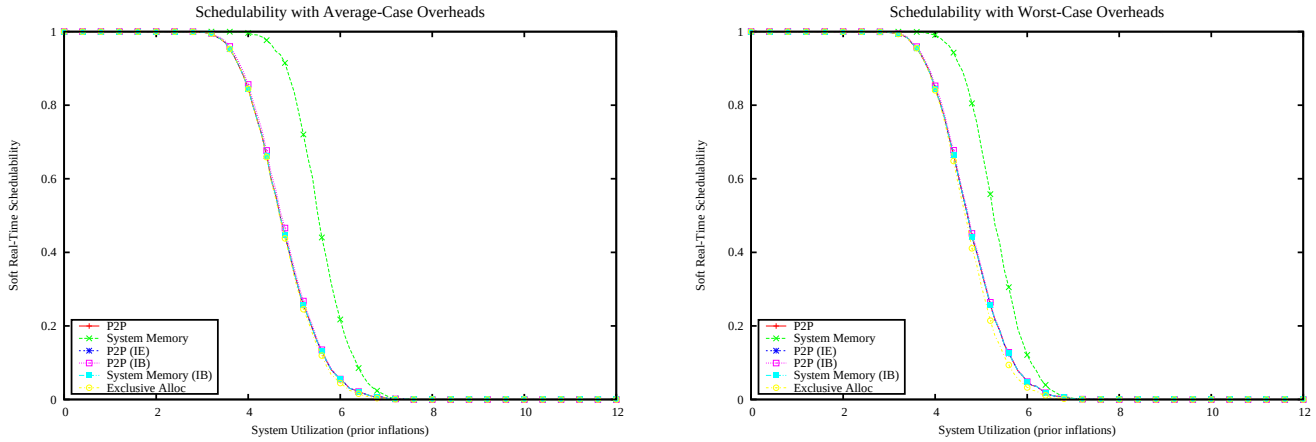

Figure 2214: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

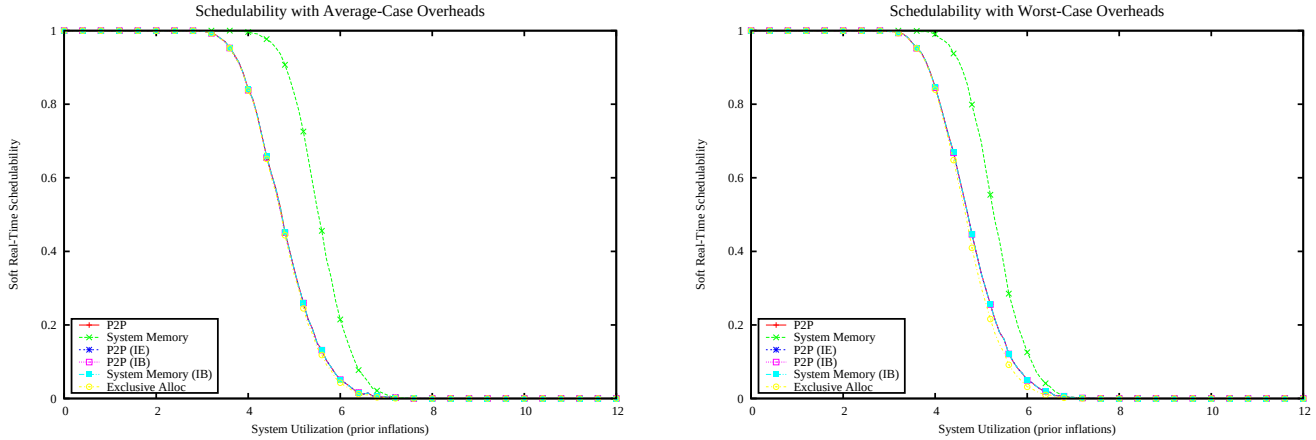

Figure 2215: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

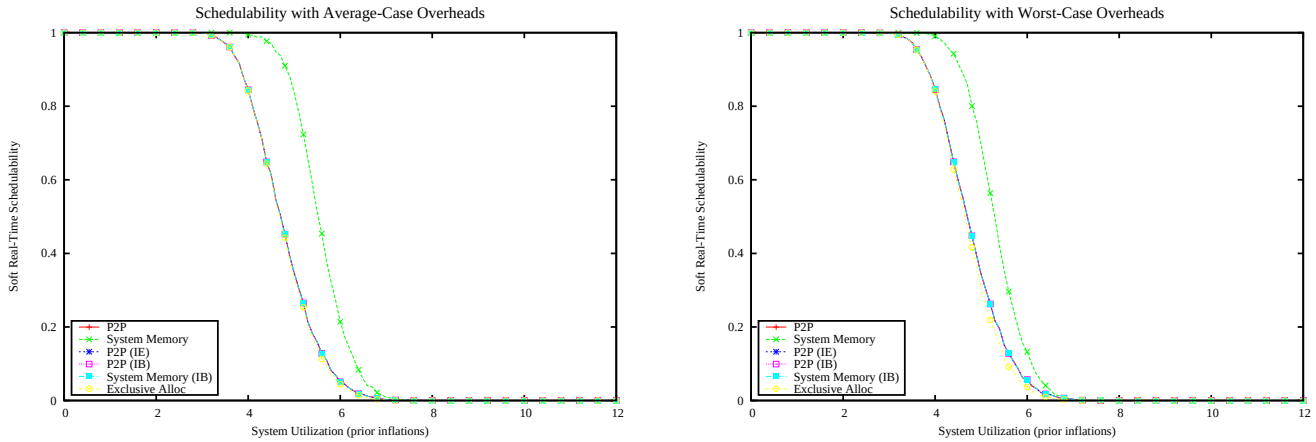

Figure 2216: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

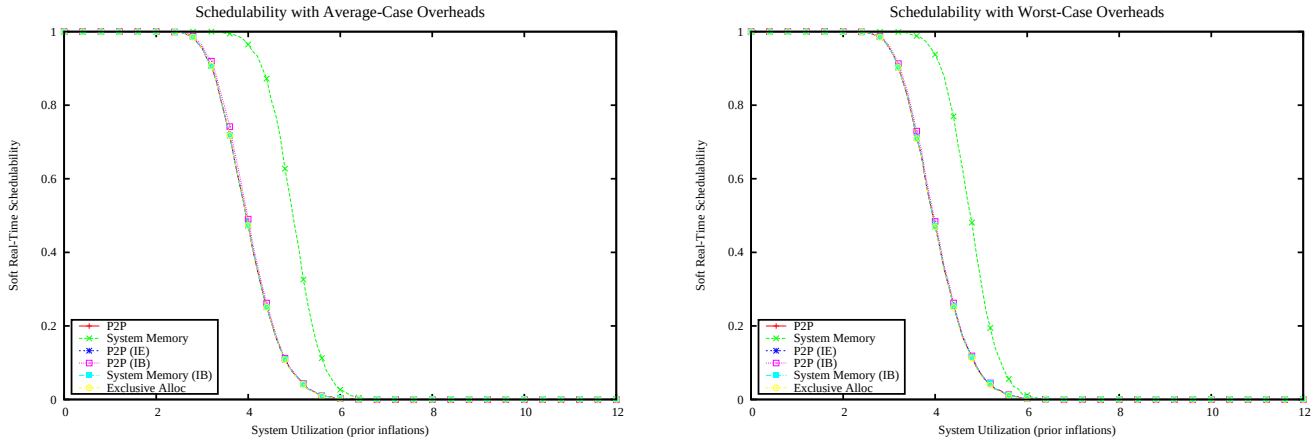

Figure 2217: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

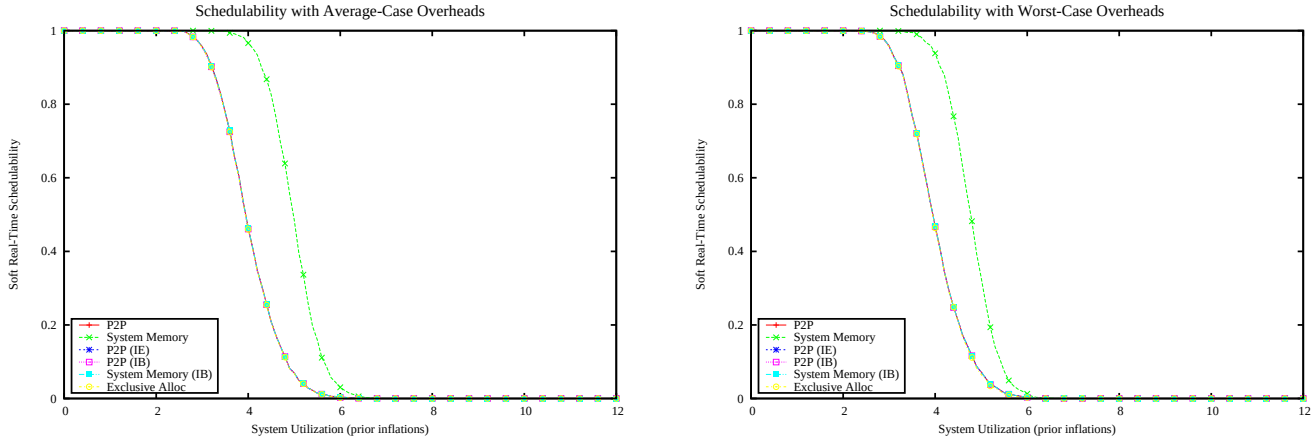

Figure 2218: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

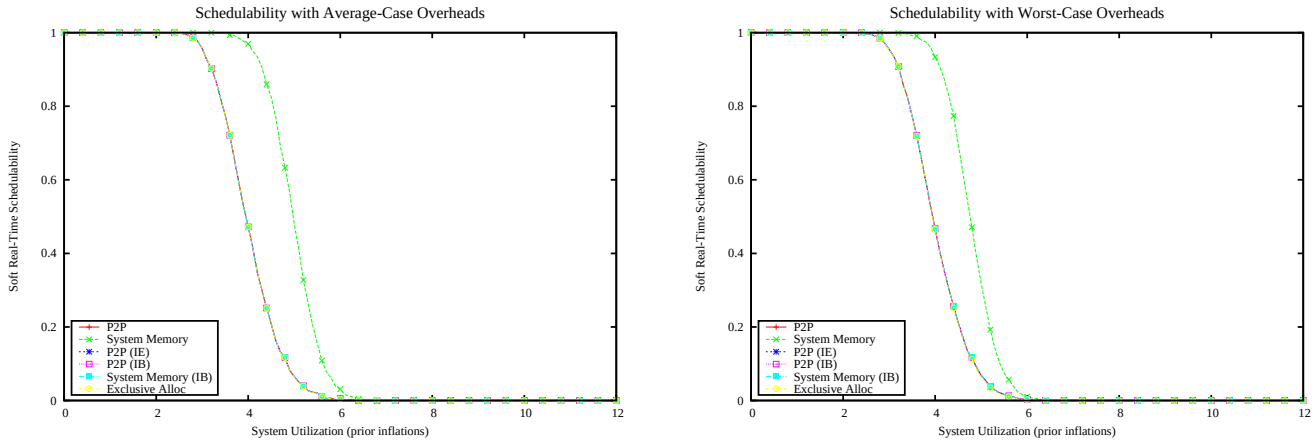

Figure 2219: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

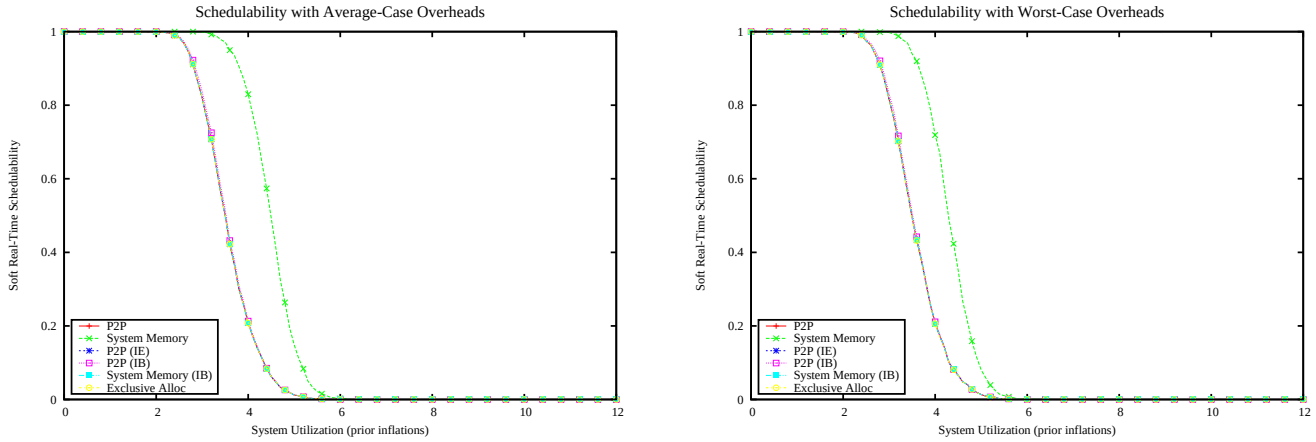

Figure 2220: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

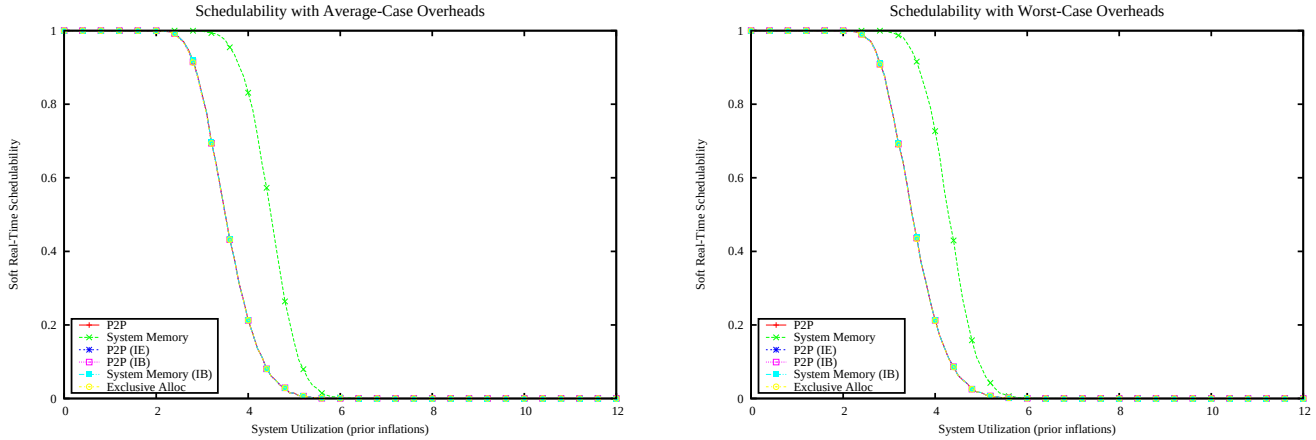

Figure 2221: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

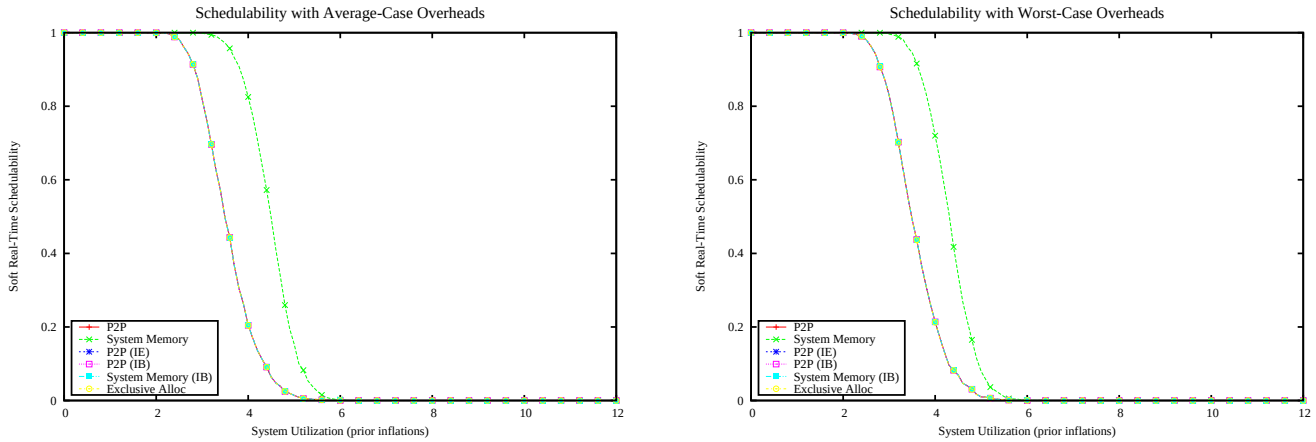

Figure 2222: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

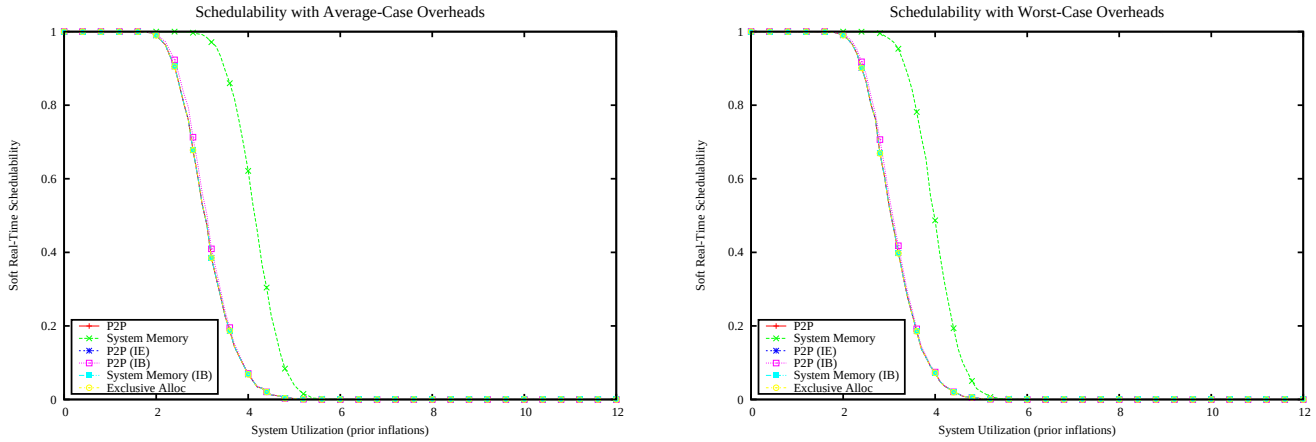

Figure 2223: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

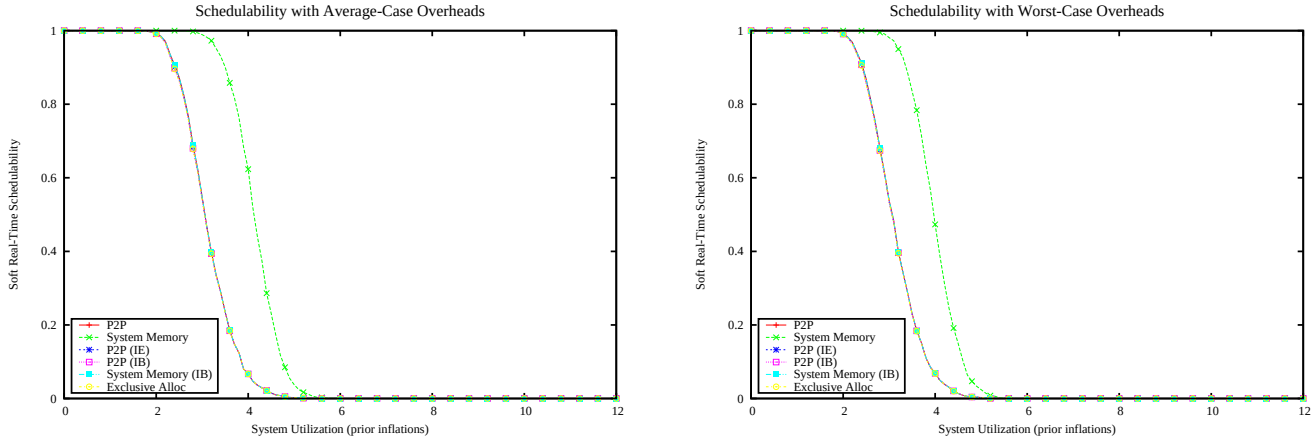

Figure 2224: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

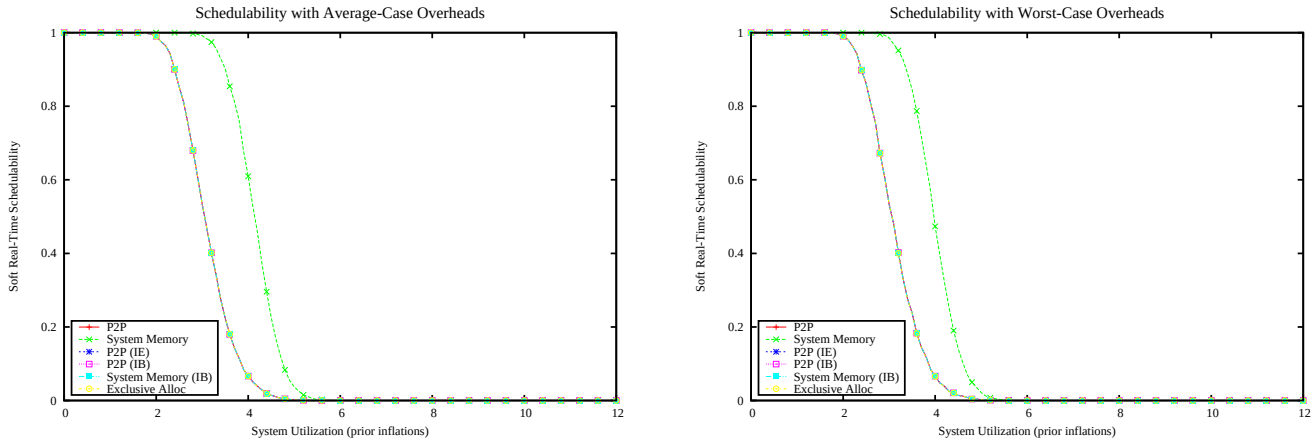

Figure 2225: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

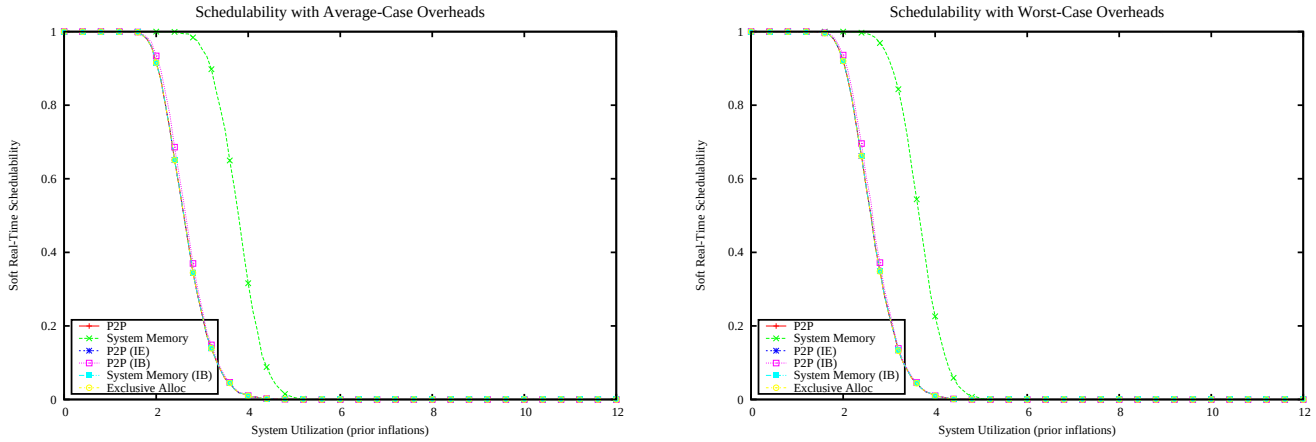

Figure 2226: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

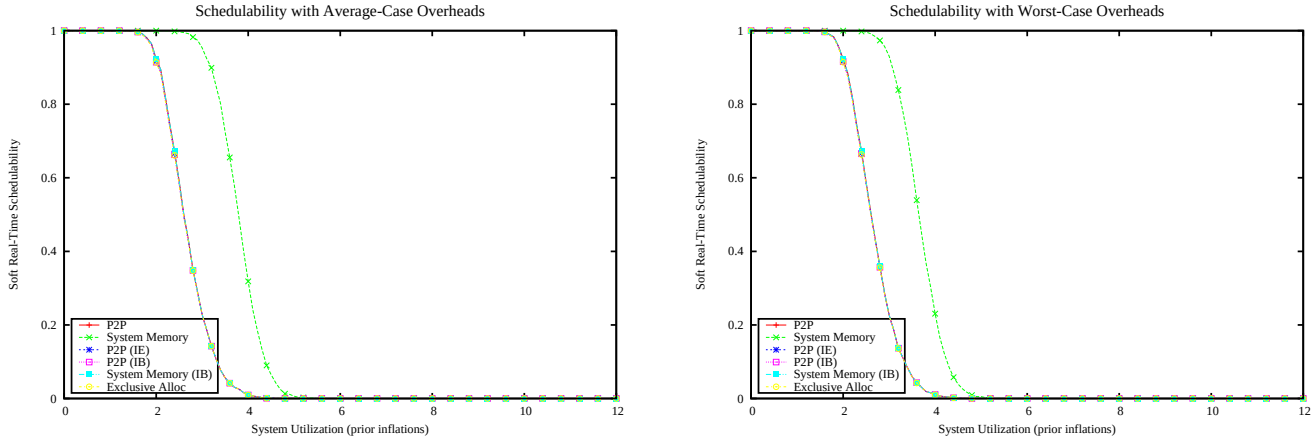

Figure 2227: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

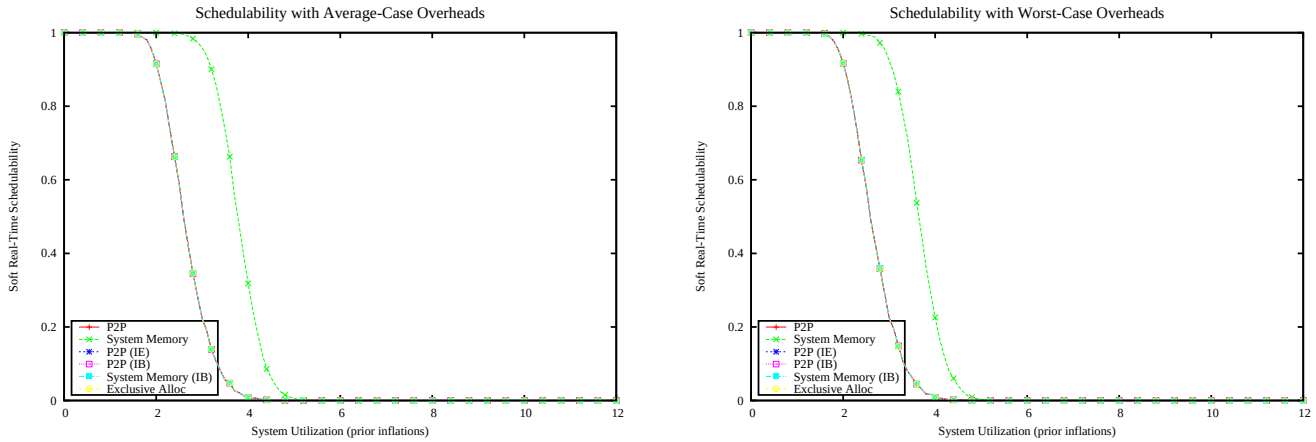

Figure 2228: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

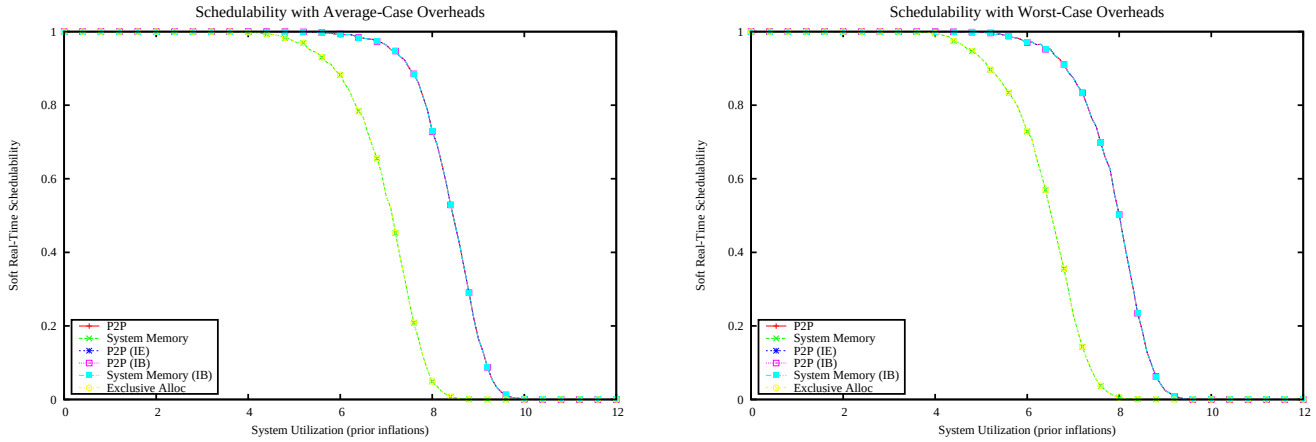

Figure 2229: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

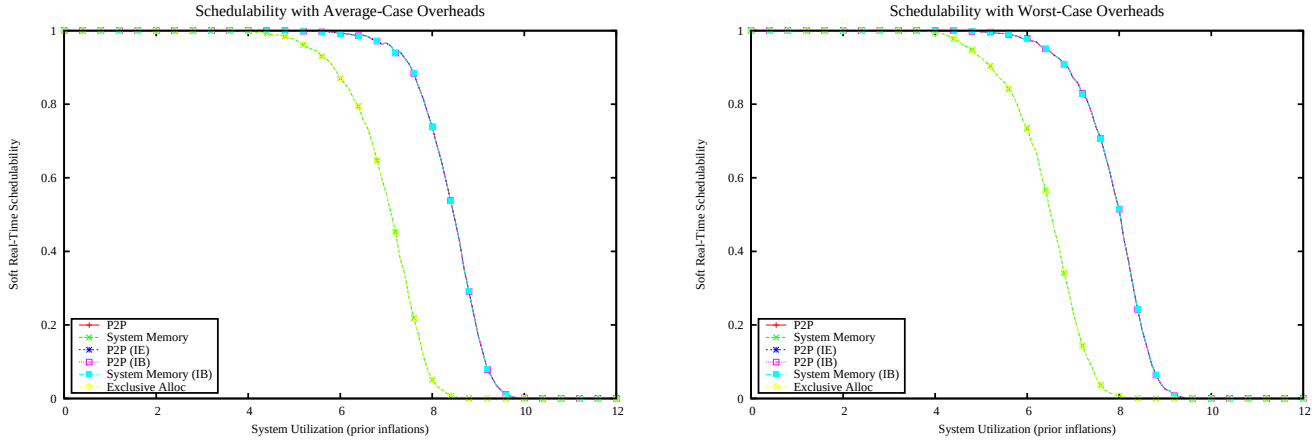

Figure 2230: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

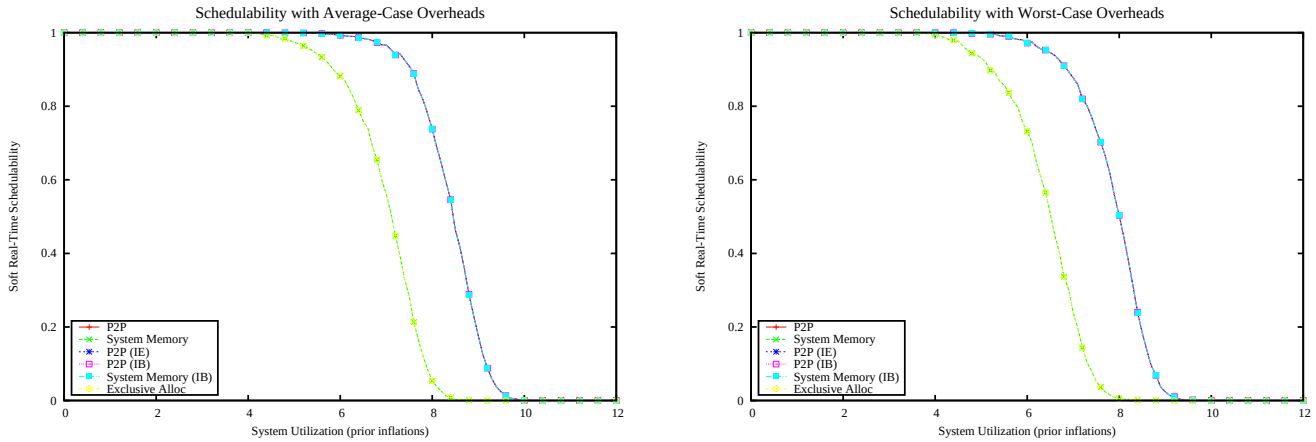

Figure 2231: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

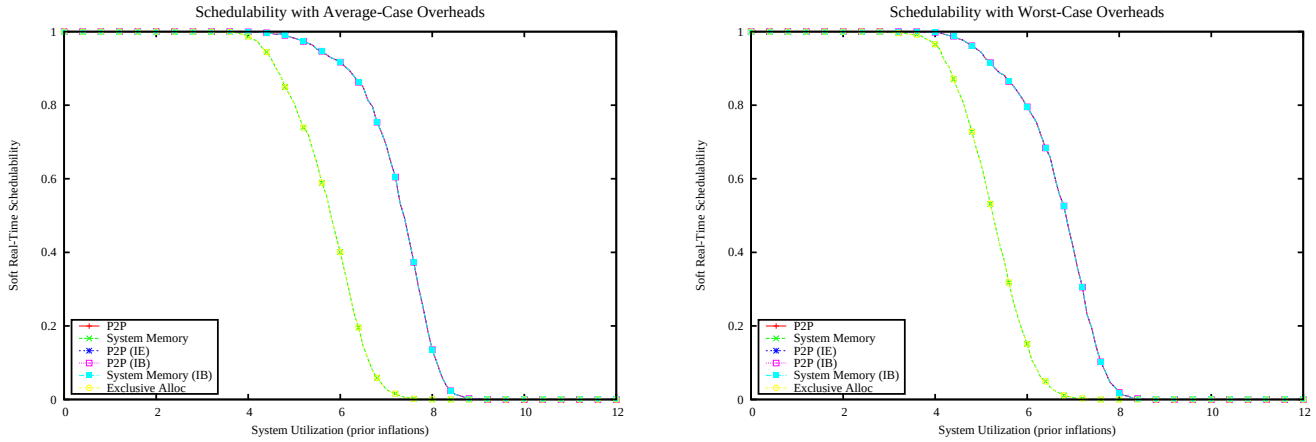

Figure 2232: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

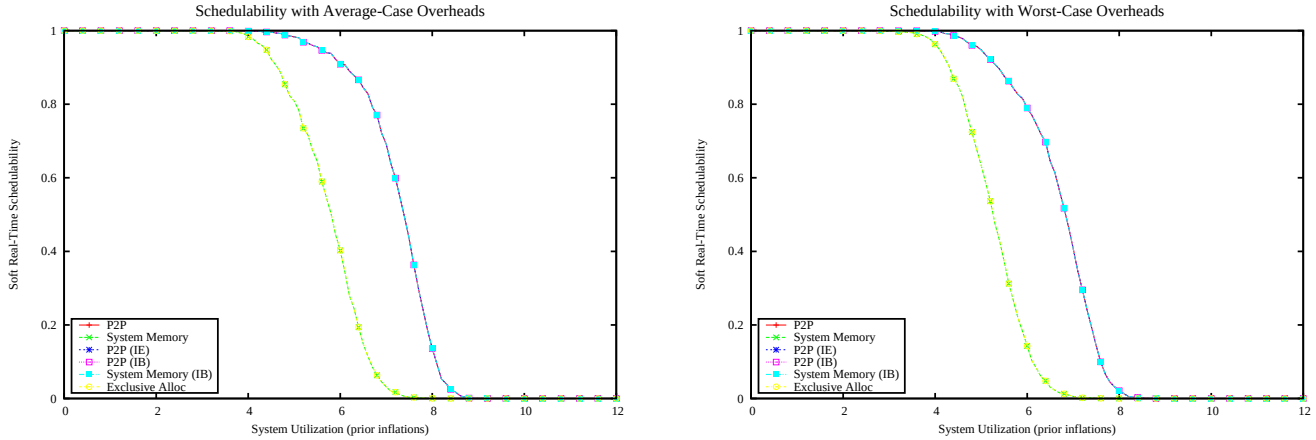

Figure 2233: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

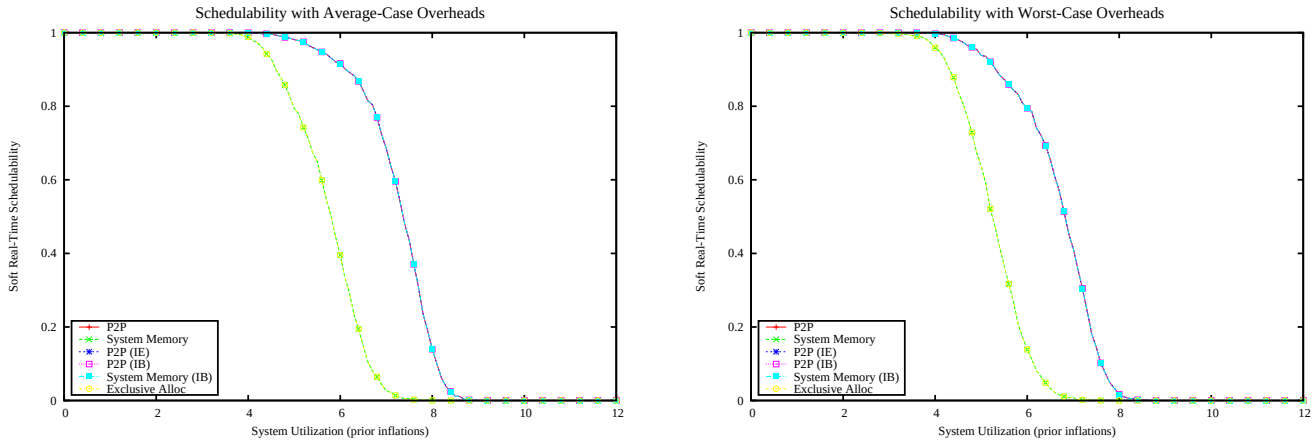

Figure 2234: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

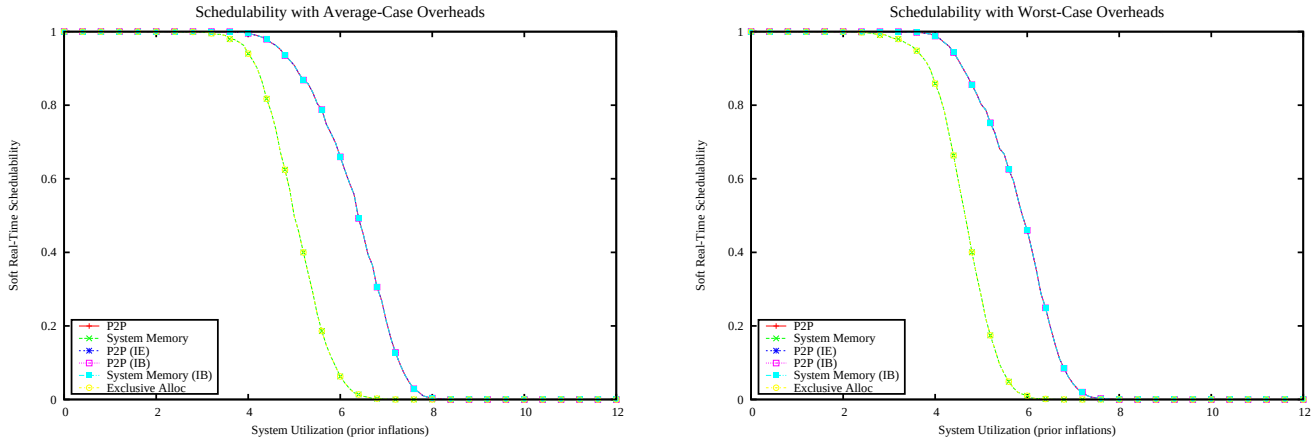

Figure 2235: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

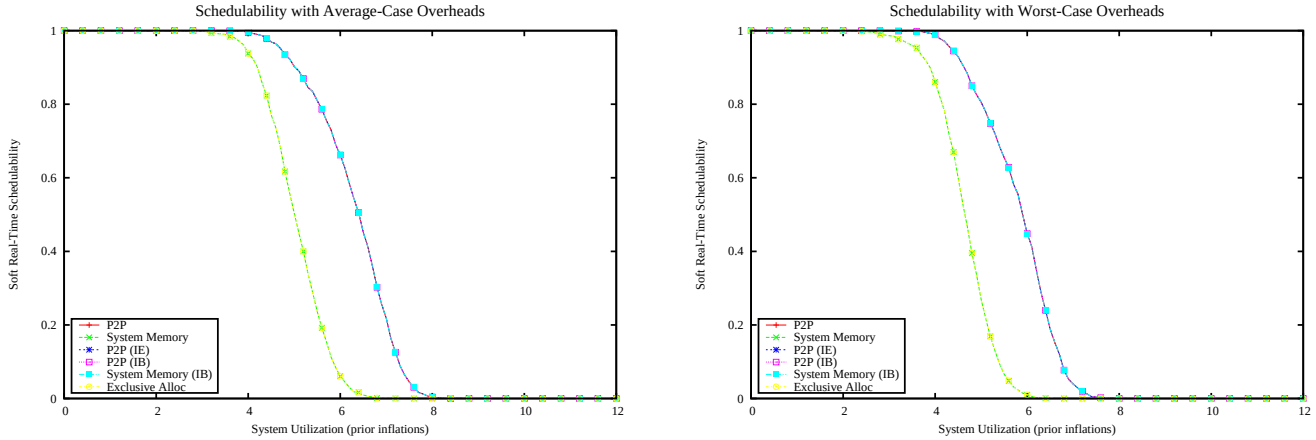

Figure 2236: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

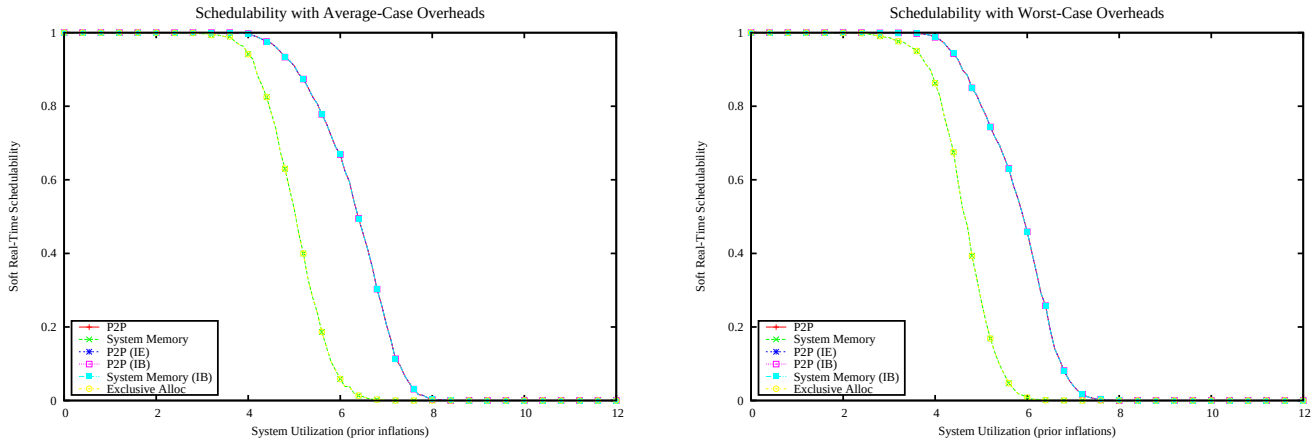

Figure 2237: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

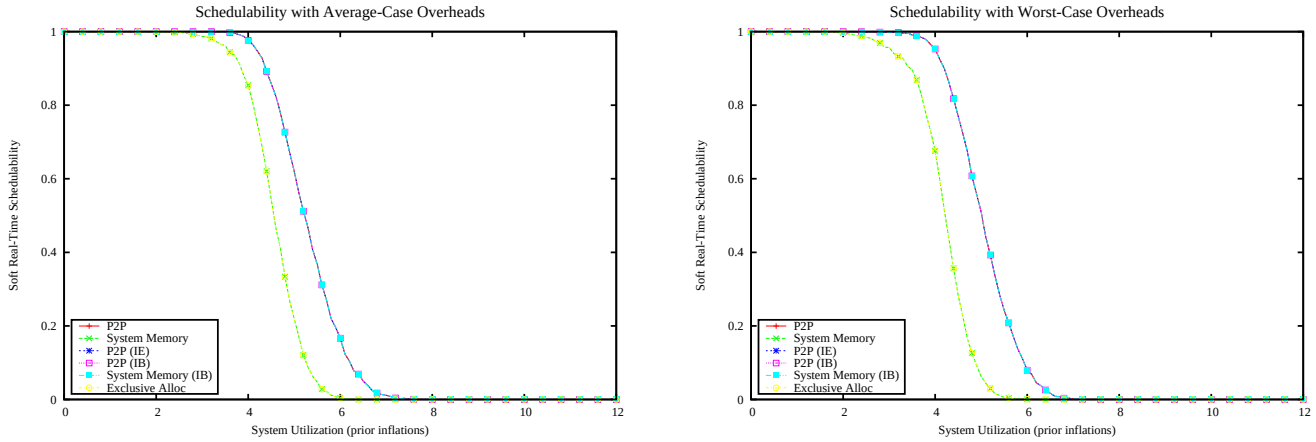

Figure 2238: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

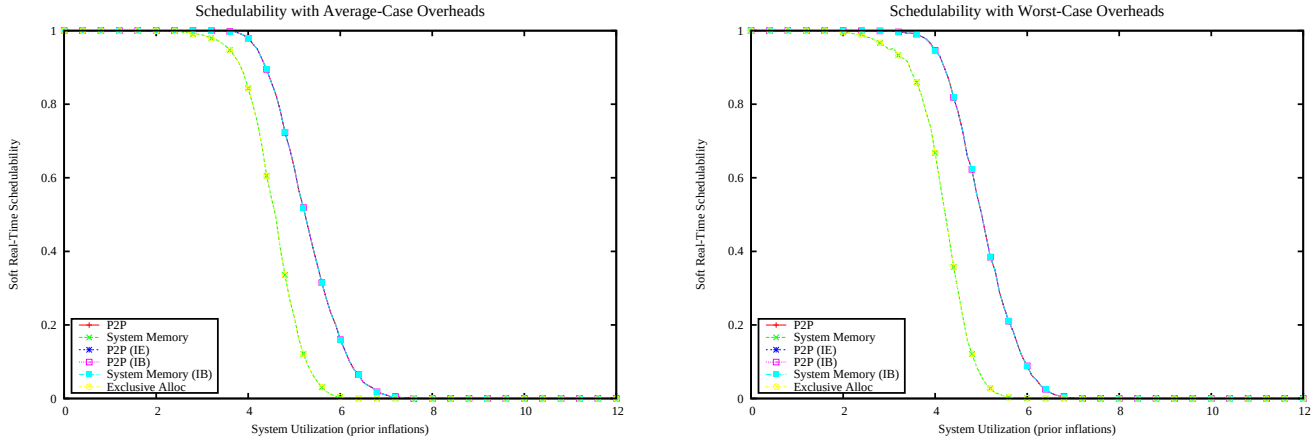

Figure 2239: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

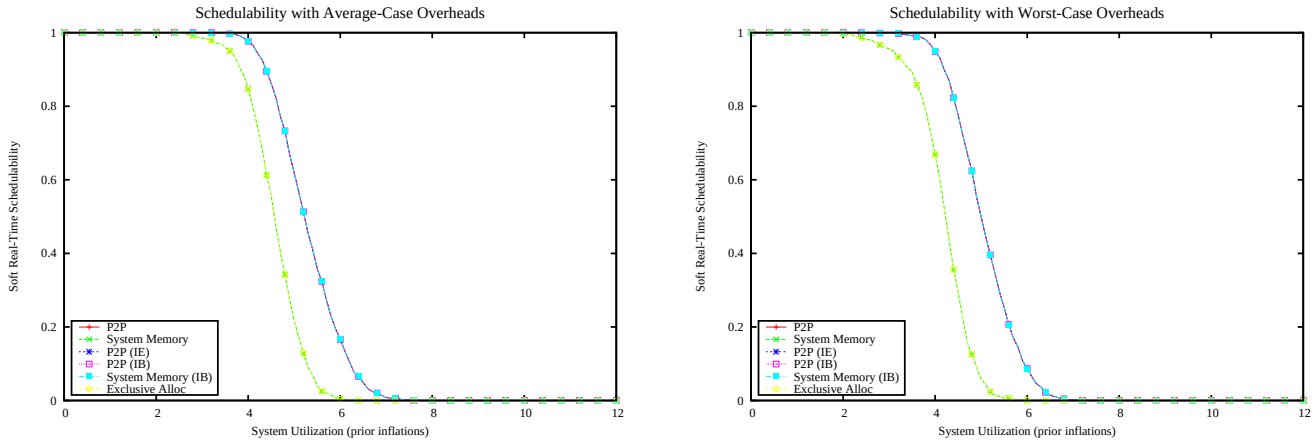

Figure 2240: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

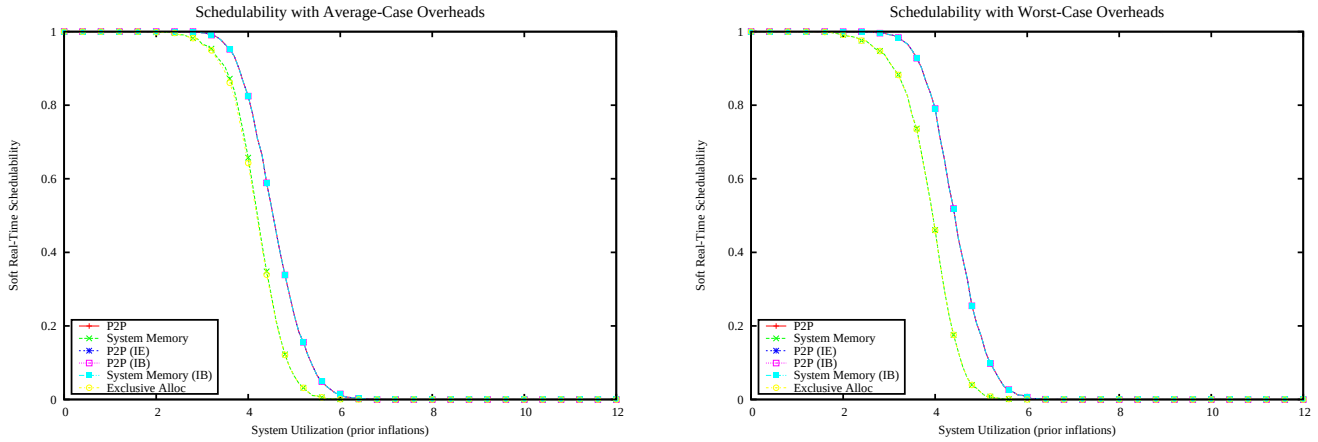

Figure 2241: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

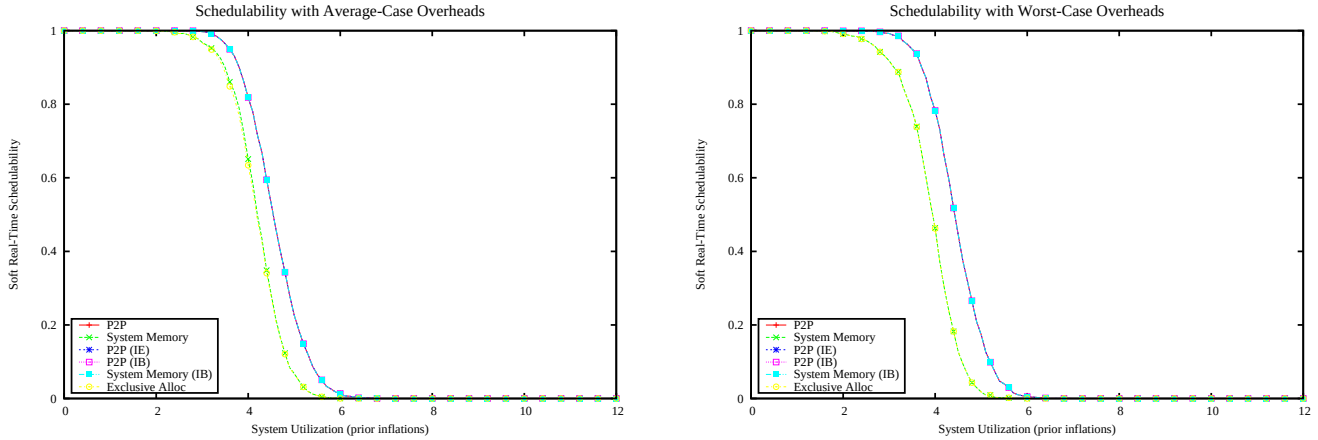

Figure 2242: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

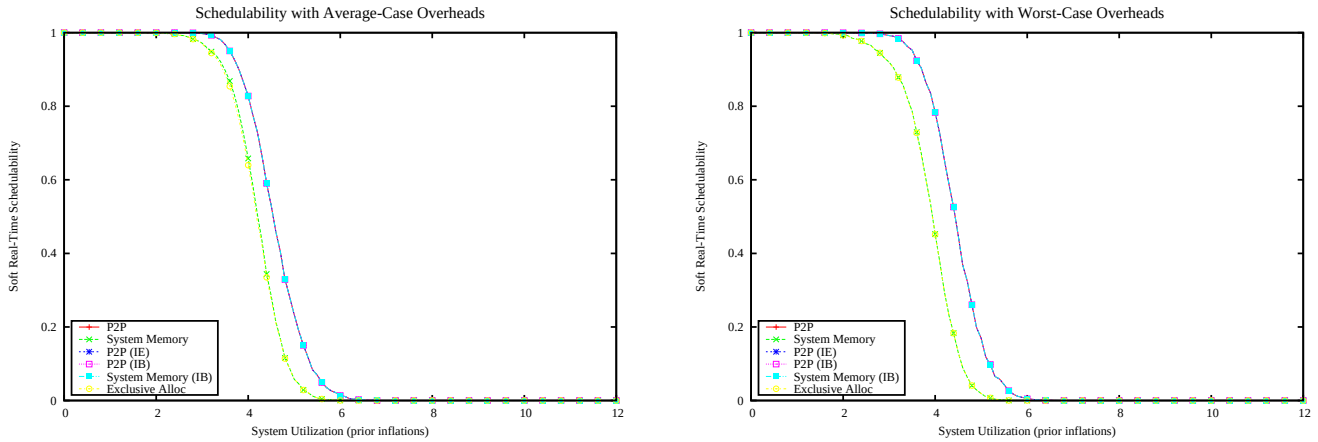

Figure 2243: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

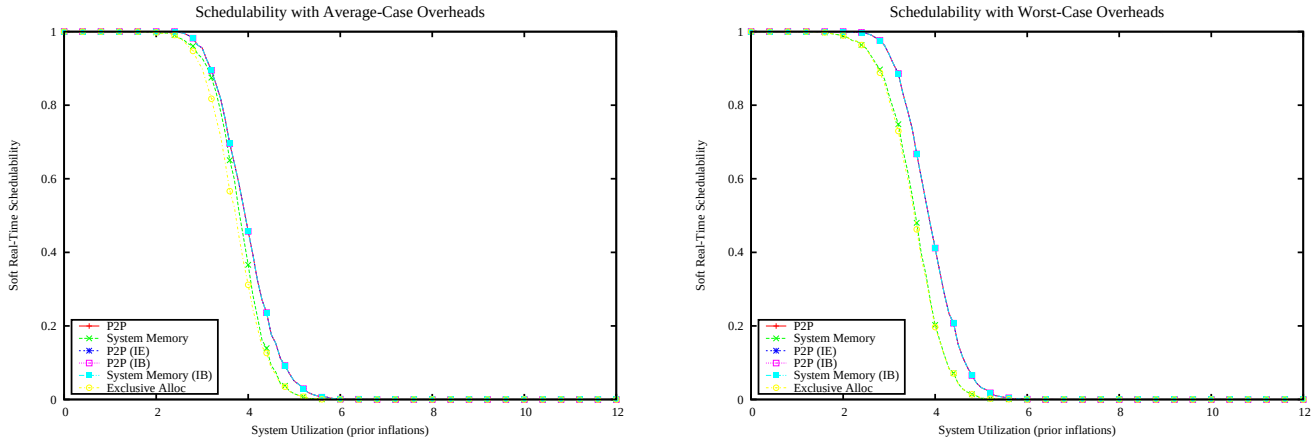

Figure 2244: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

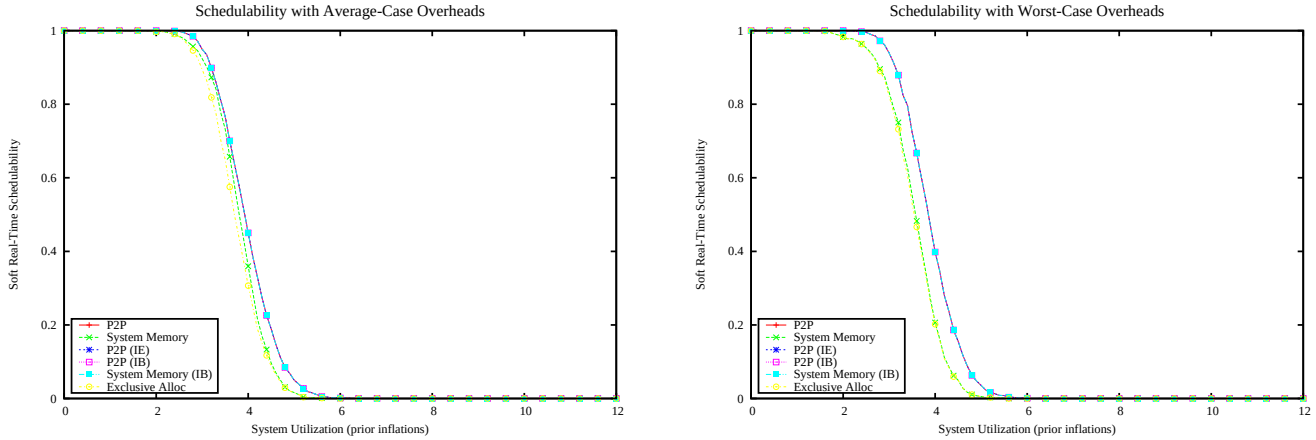

Figure 2245: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

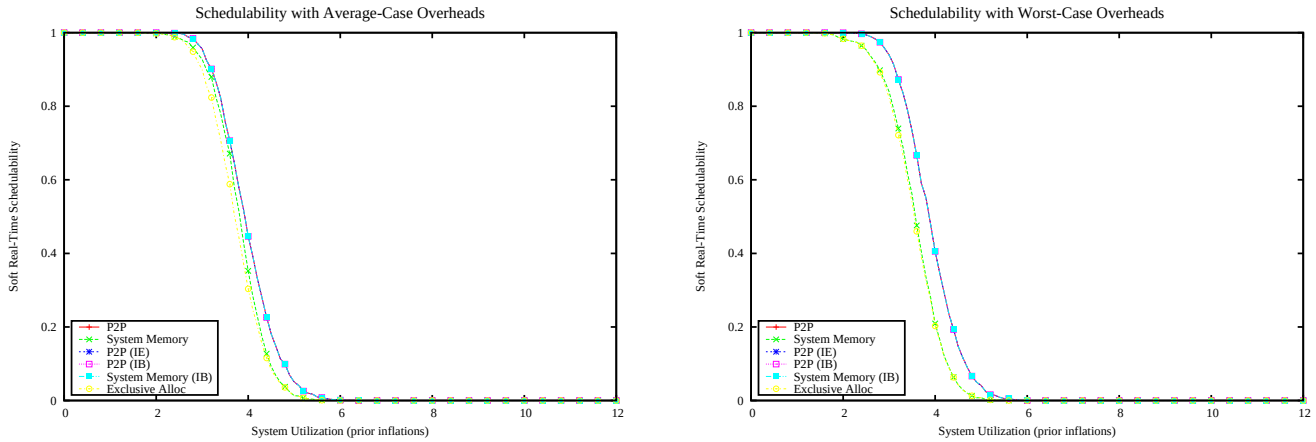

Figure 2246: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

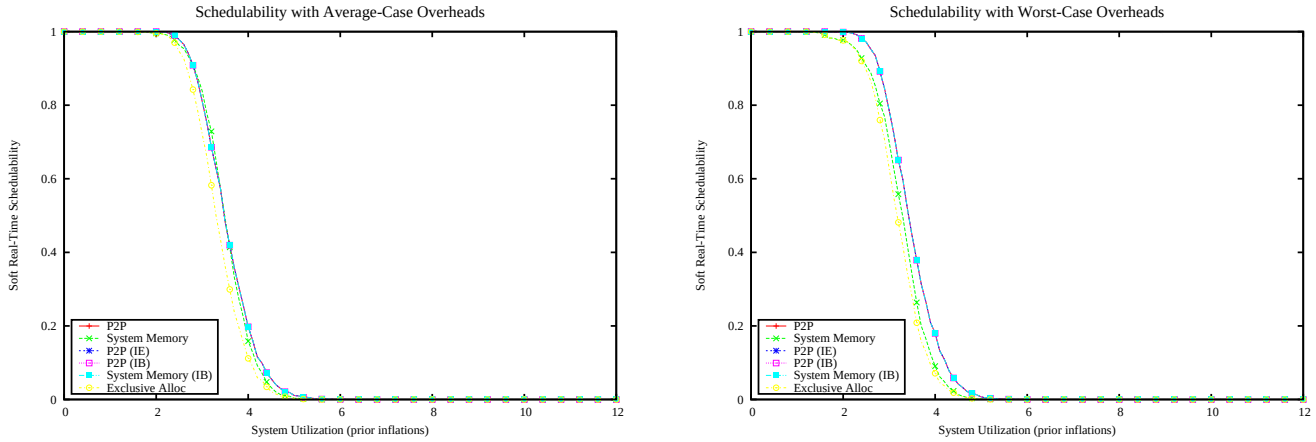

Figure 2247: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

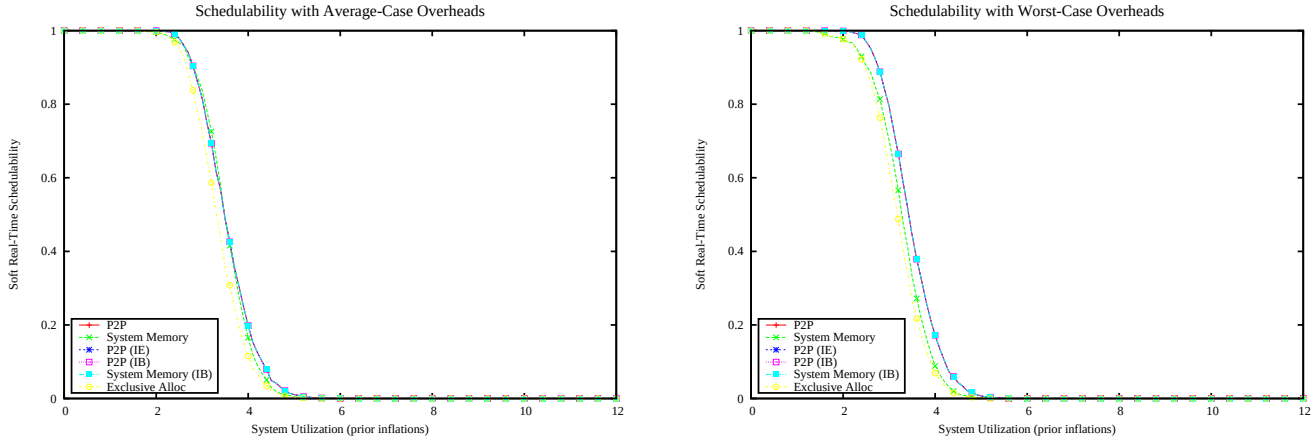

Figure 2248: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

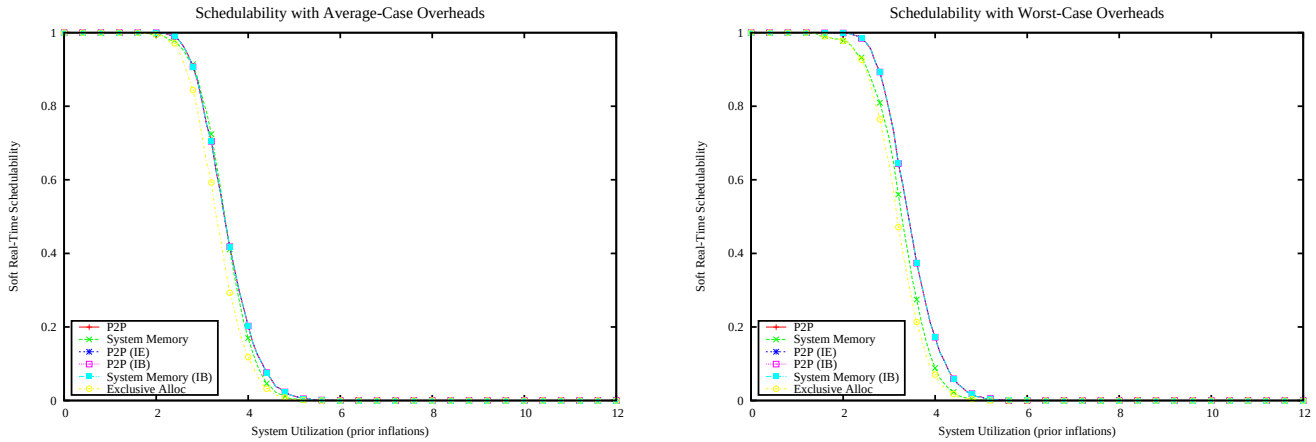

Figure 2249: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

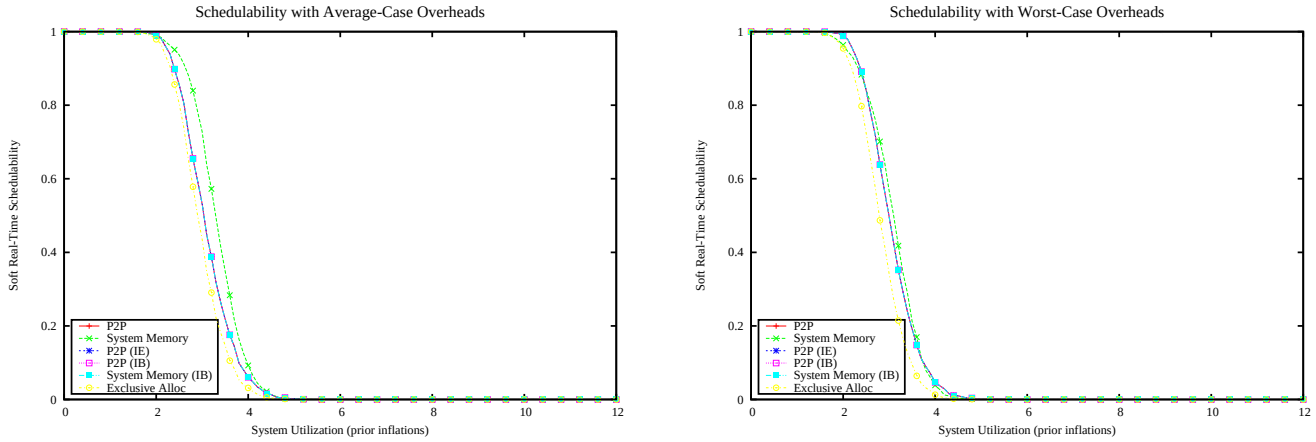

Figure 2250: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

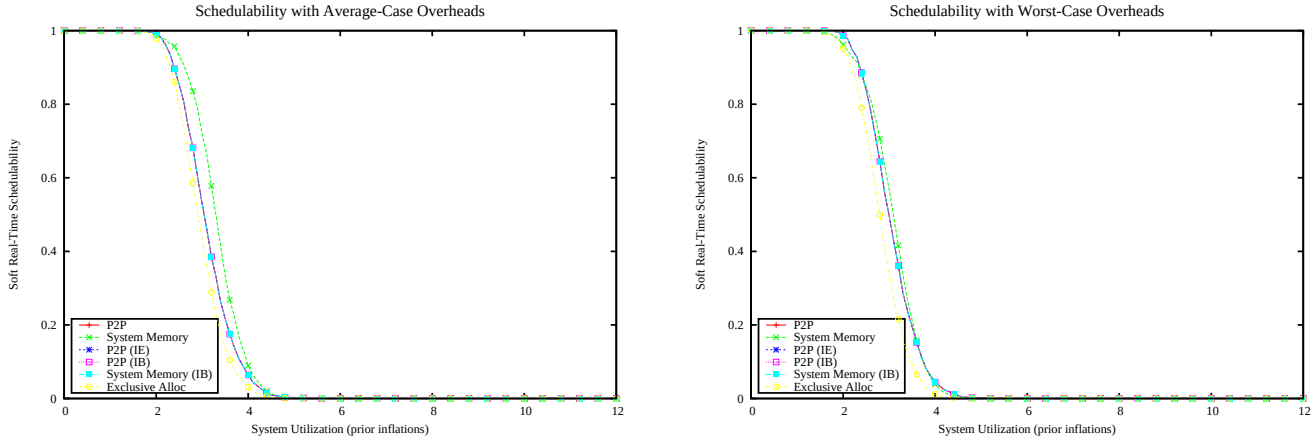

Figure 2251: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

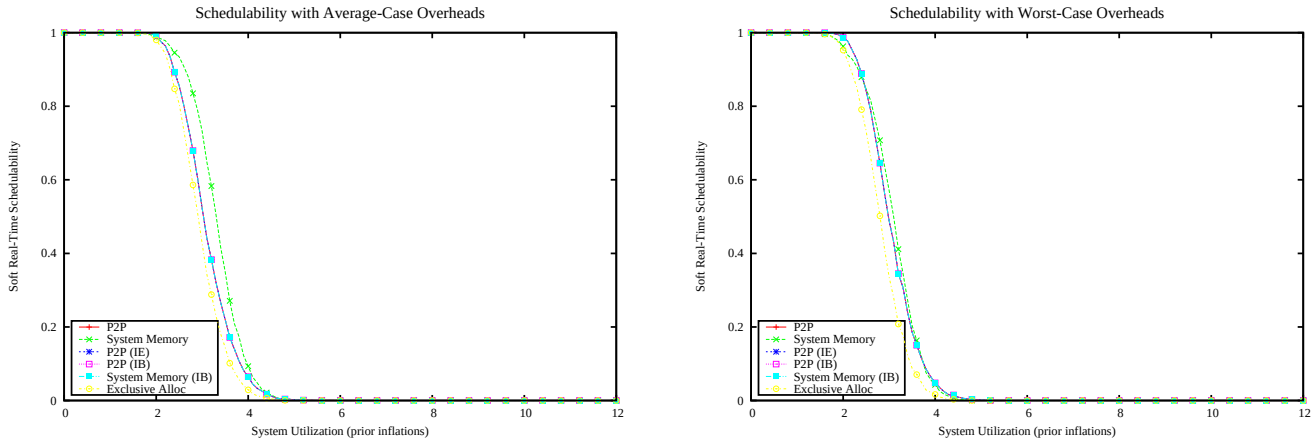

Figure 2252: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

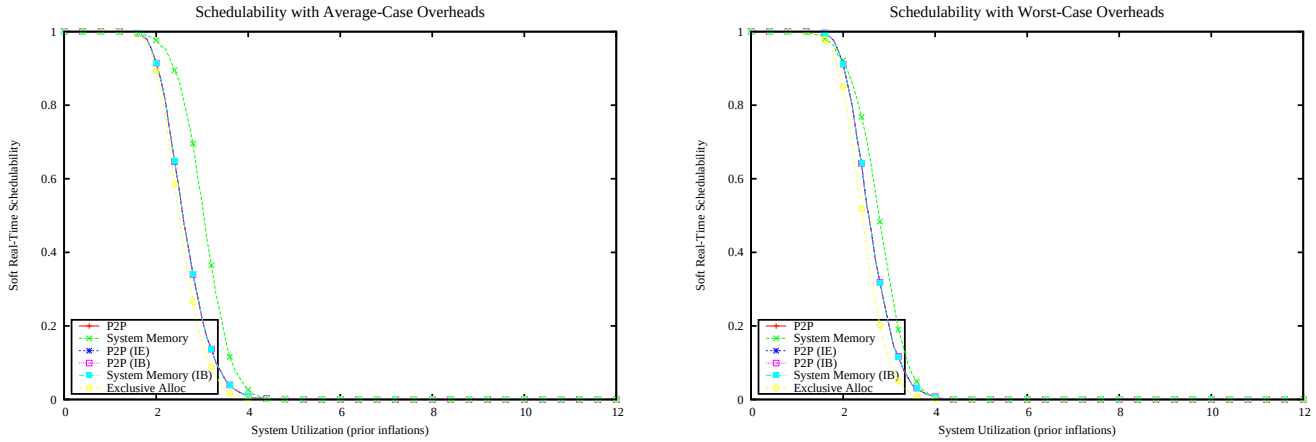

Figure 2253: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

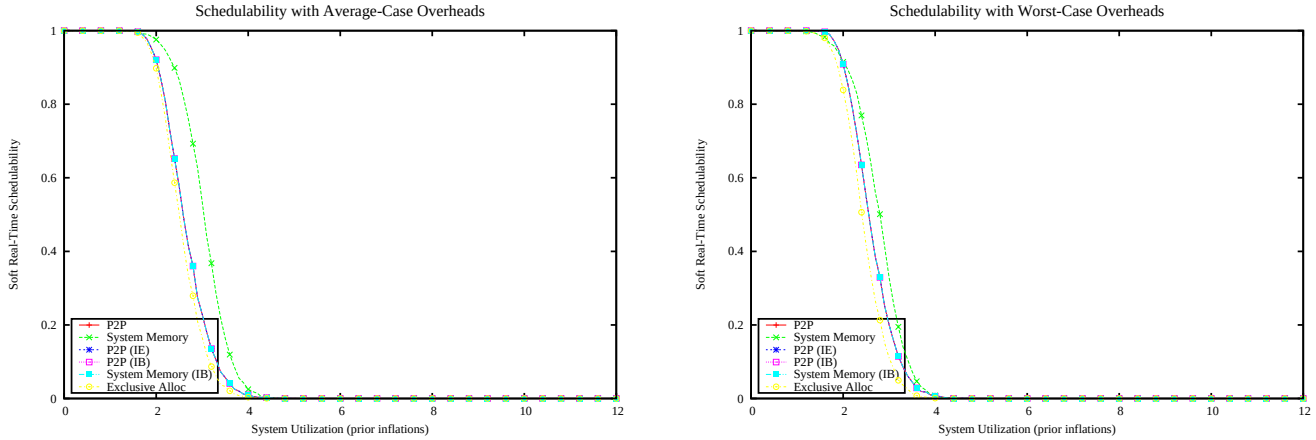

Figure 2254: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

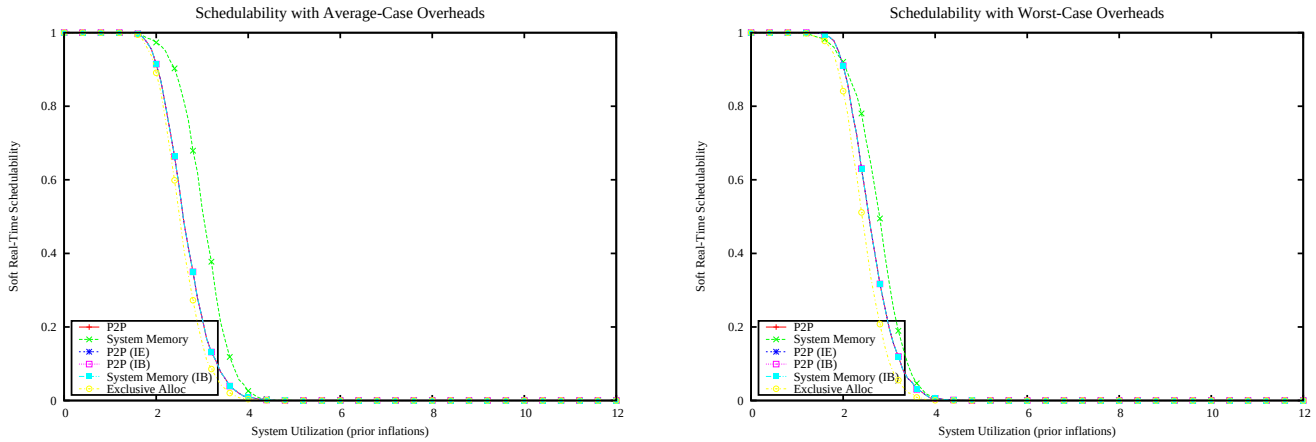

Figure 2255: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

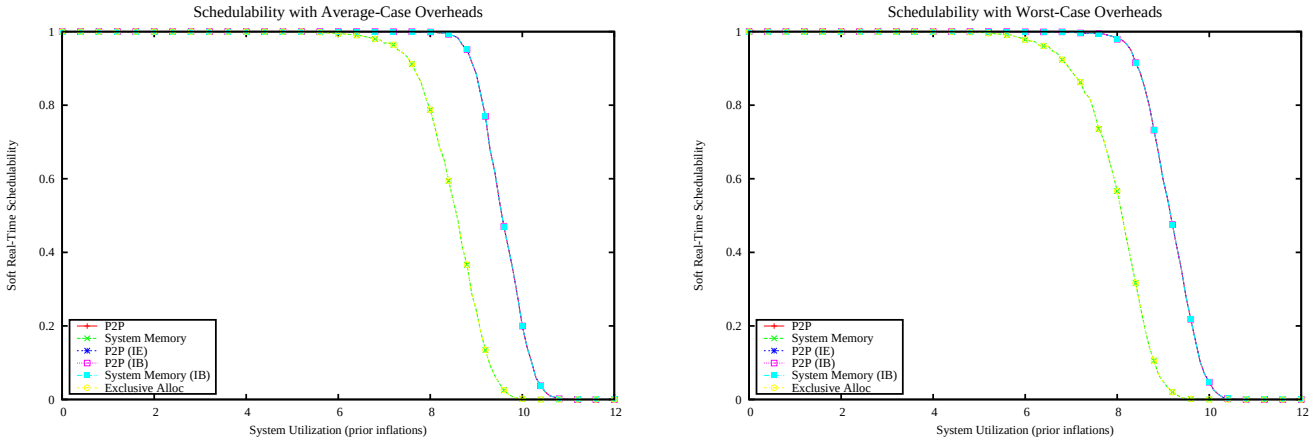

Figure 2256: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

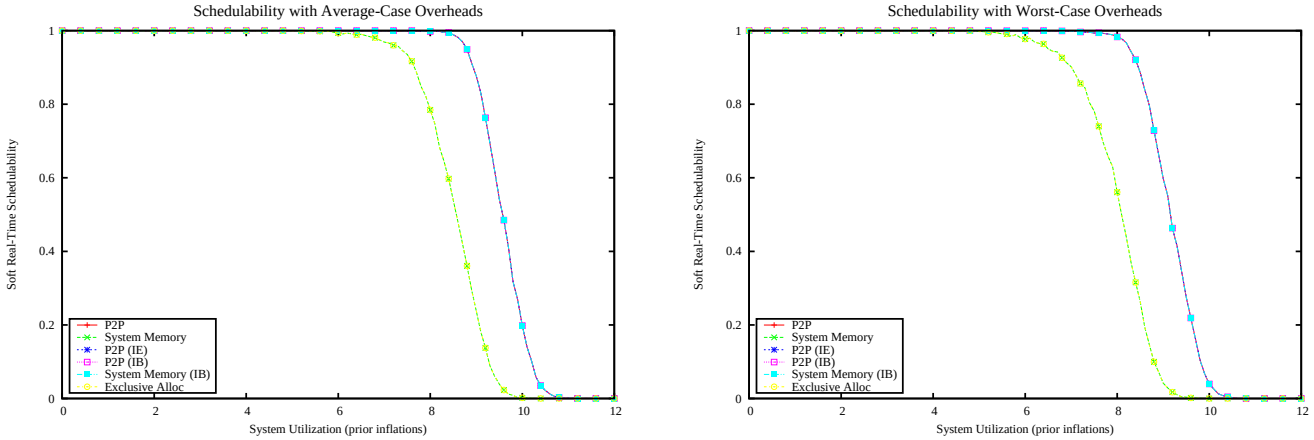

Figure 2257: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

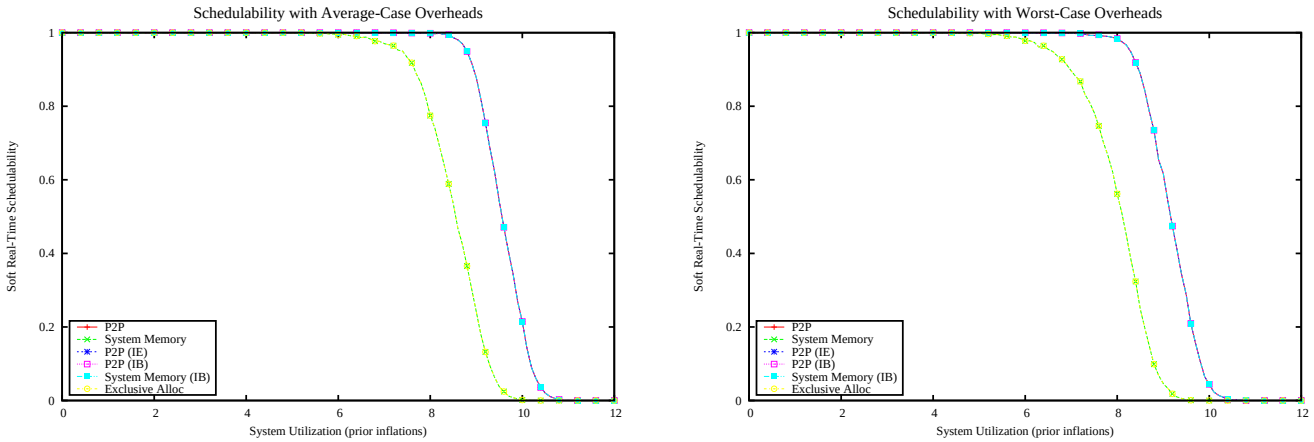

Figure 2258: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

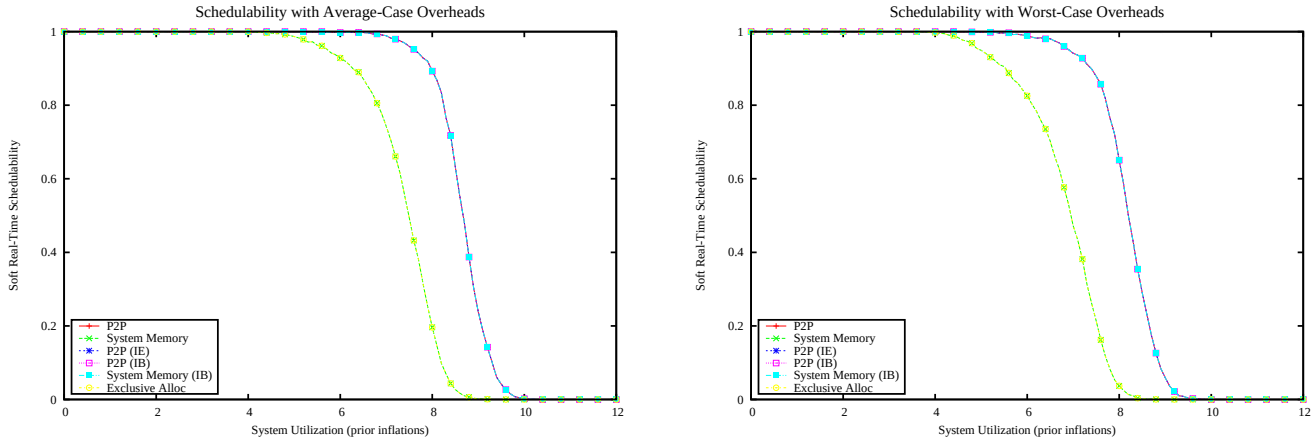

Figure 2259: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

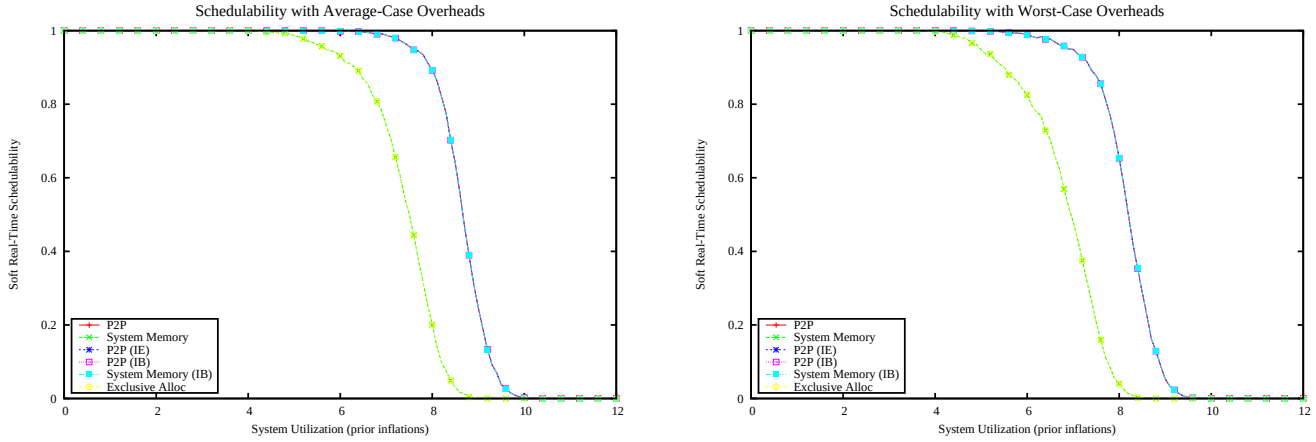

Figure 2260: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

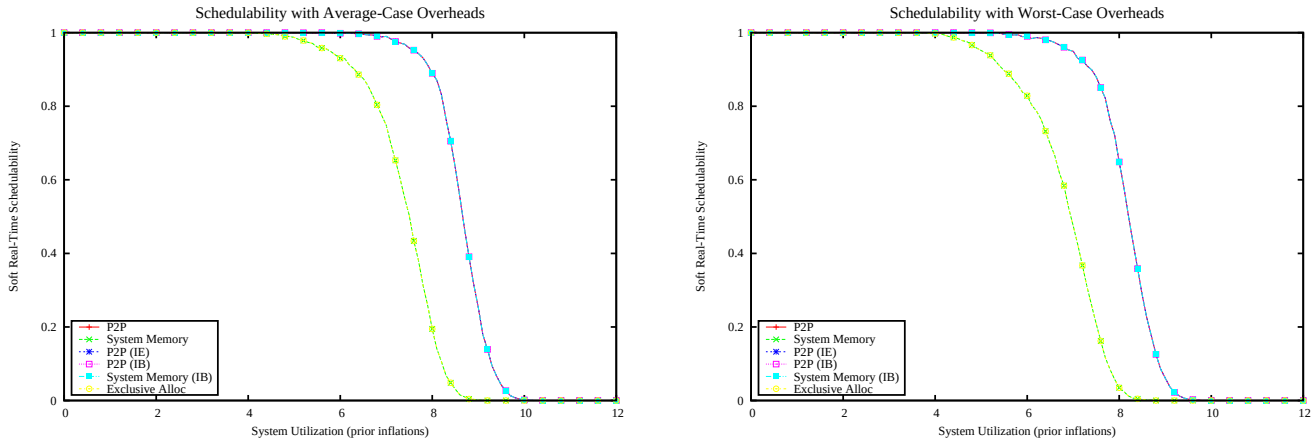

Figure 2261: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

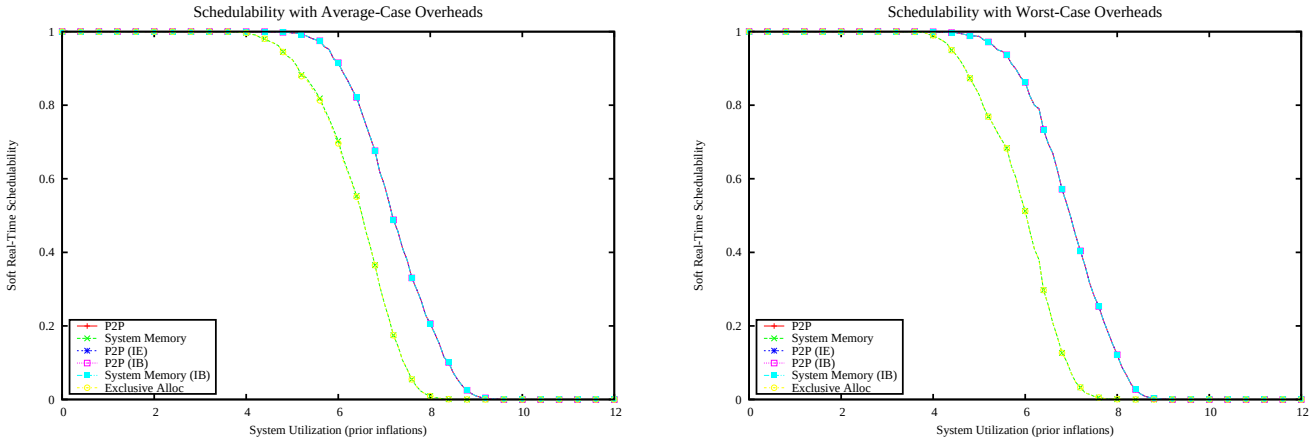

Figure 2262: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

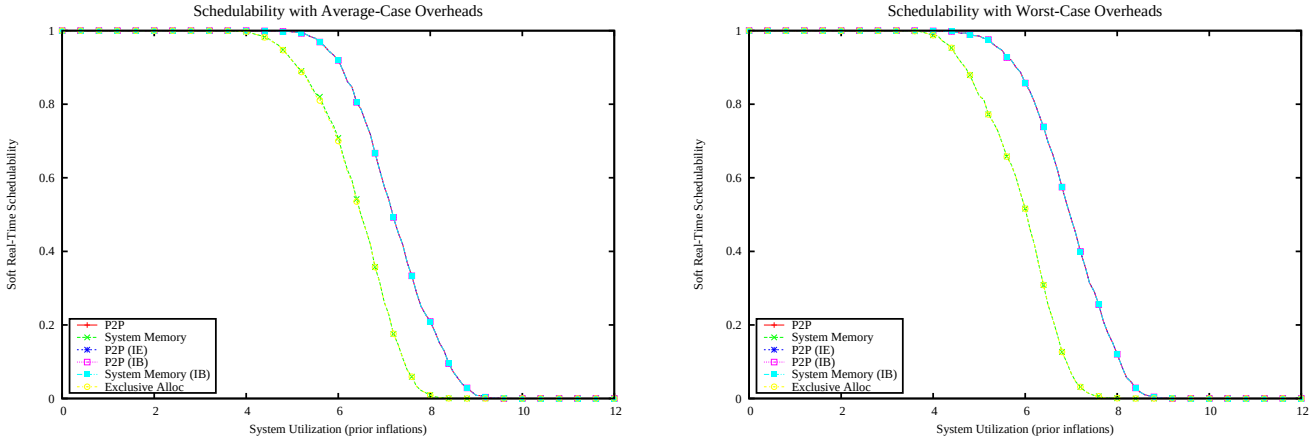

Figure 2263: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

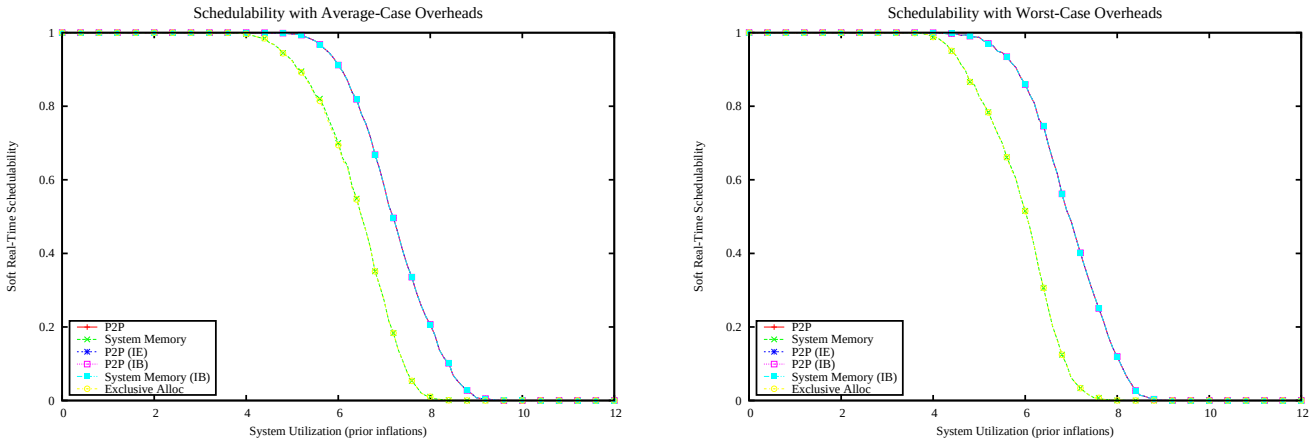

Figure 2264: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

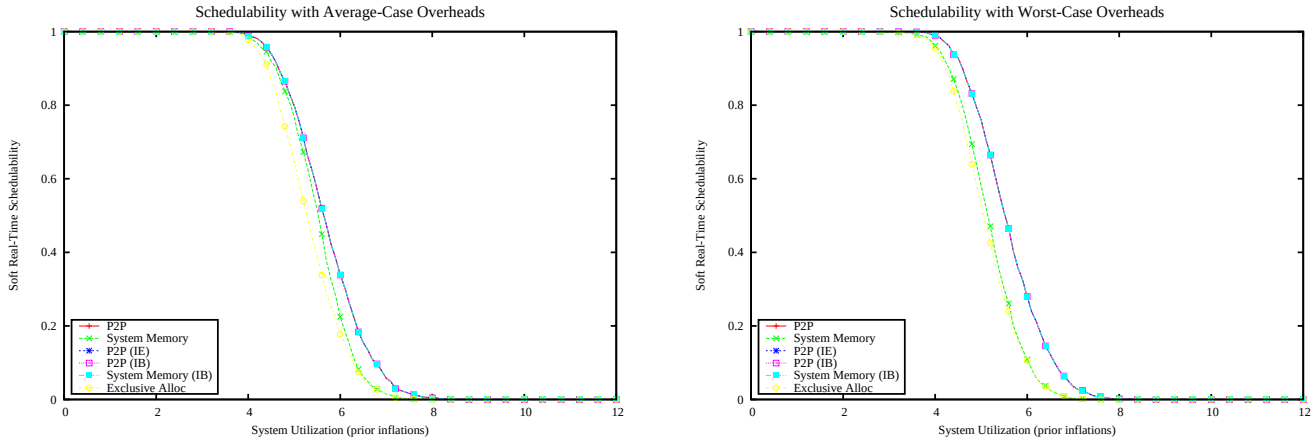

Figure 2265: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

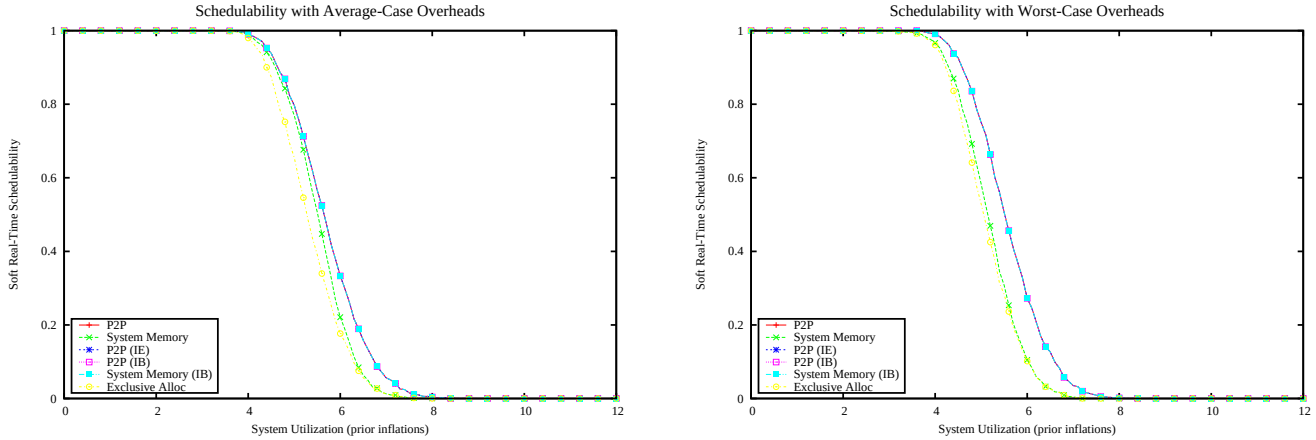

Figure 2266: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

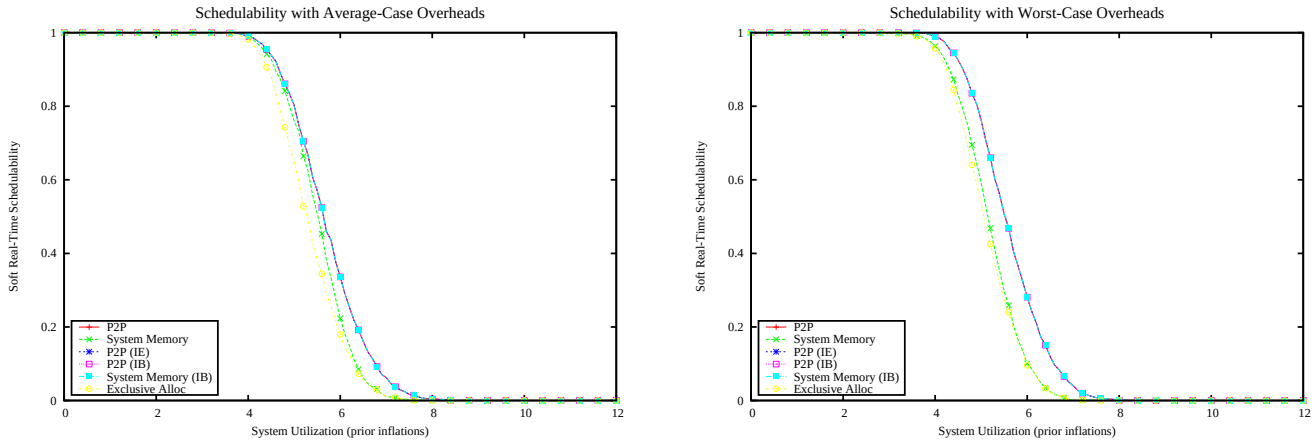

Figure 2267: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

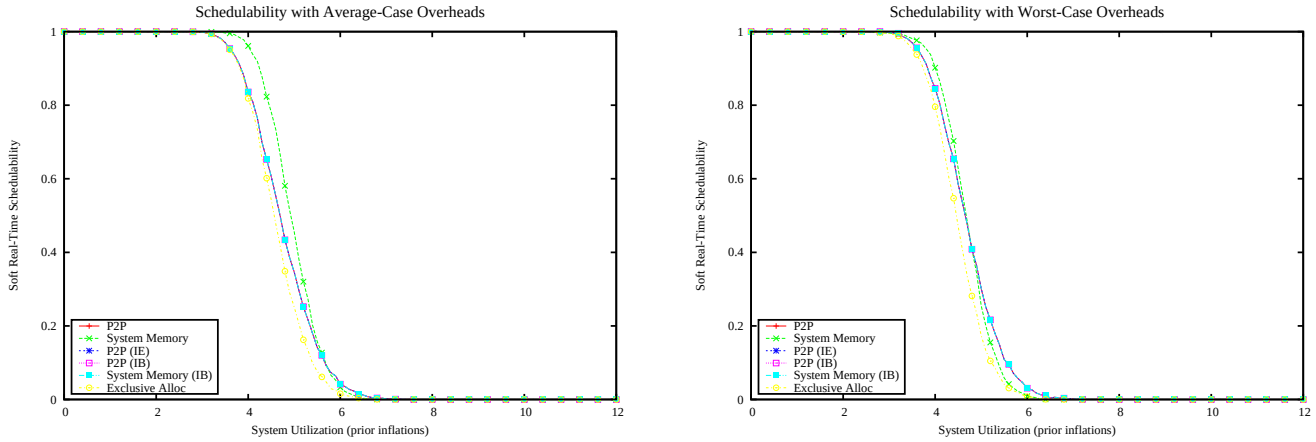

Figure 2268: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

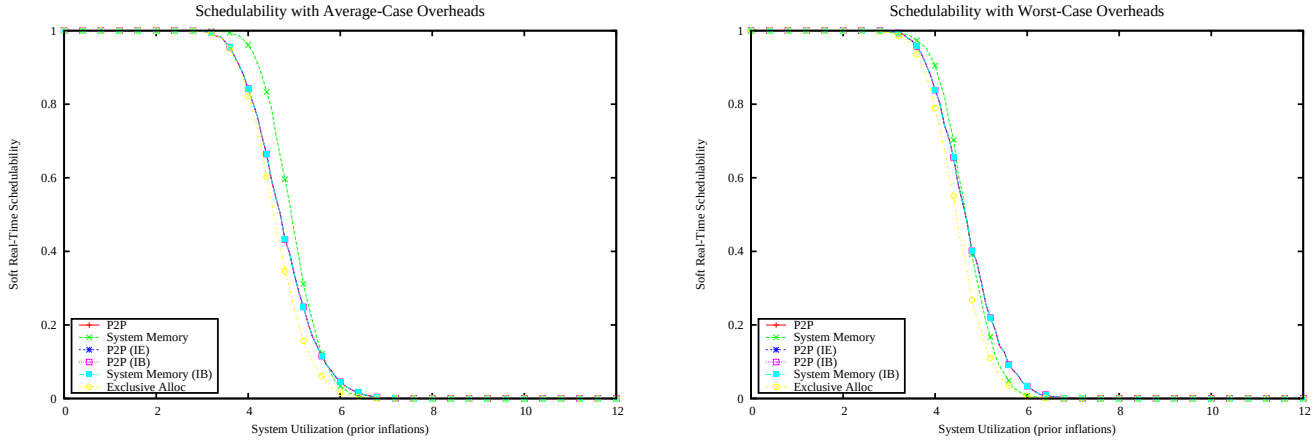

Figure 2269: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

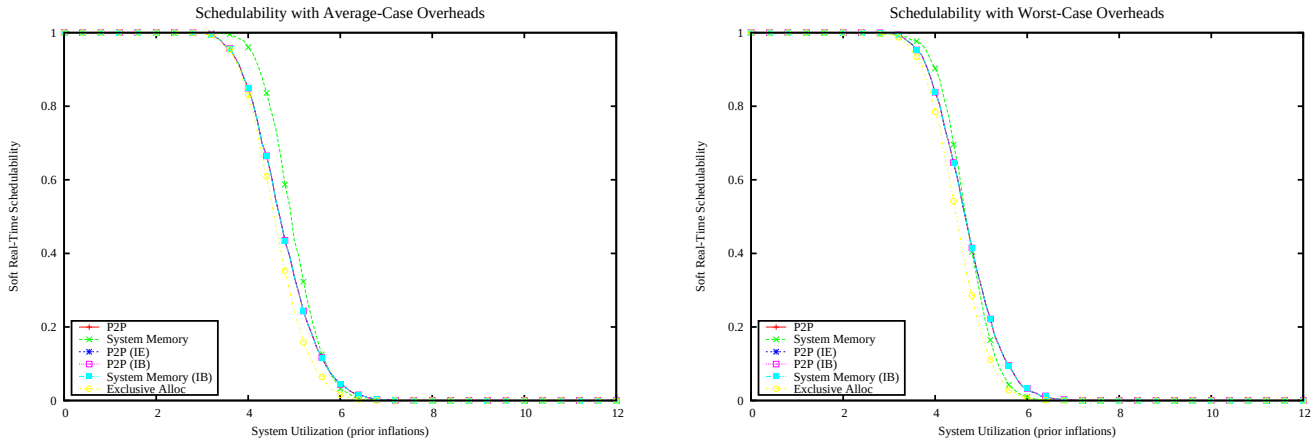

Figure 2270: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

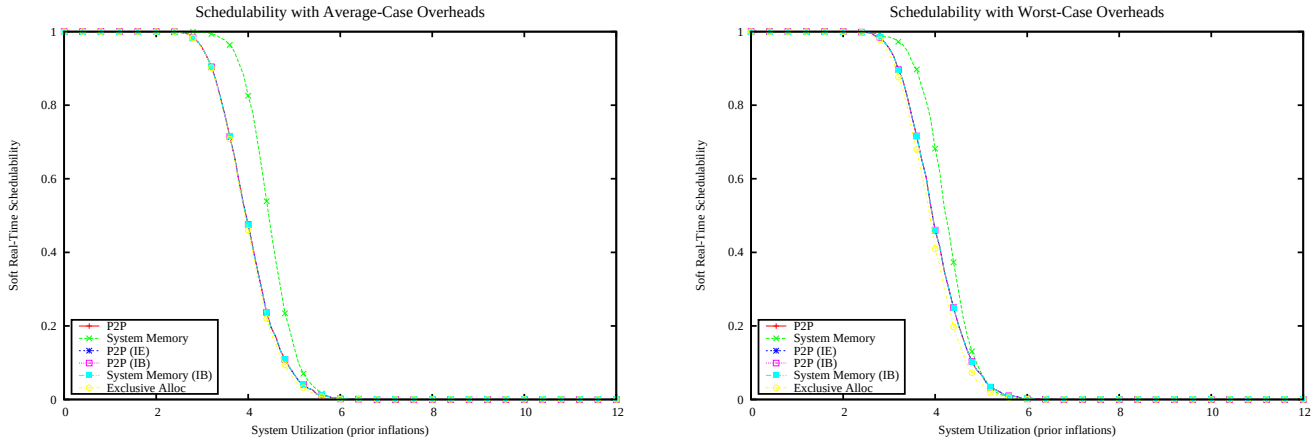

Figure 2271: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

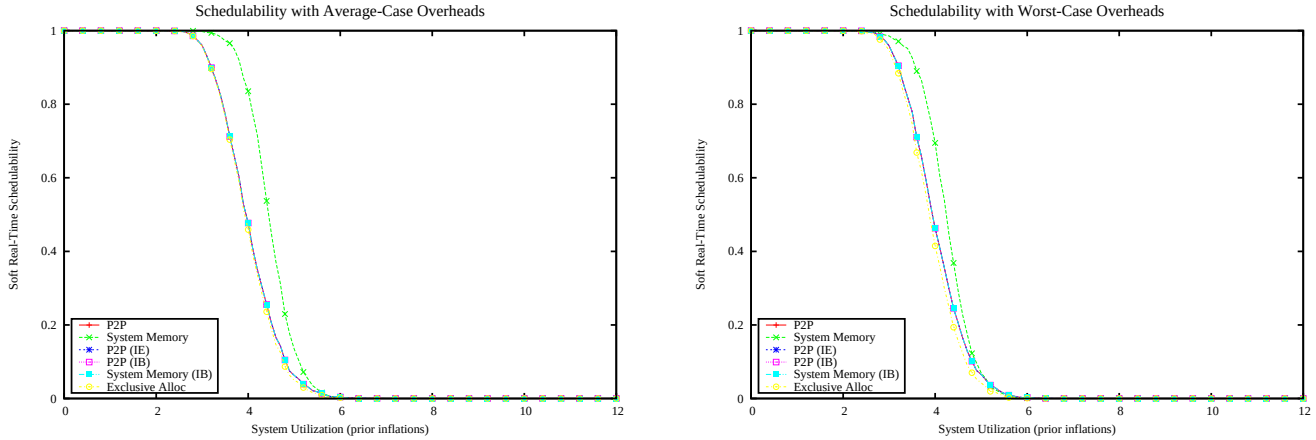

Figure 2272: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

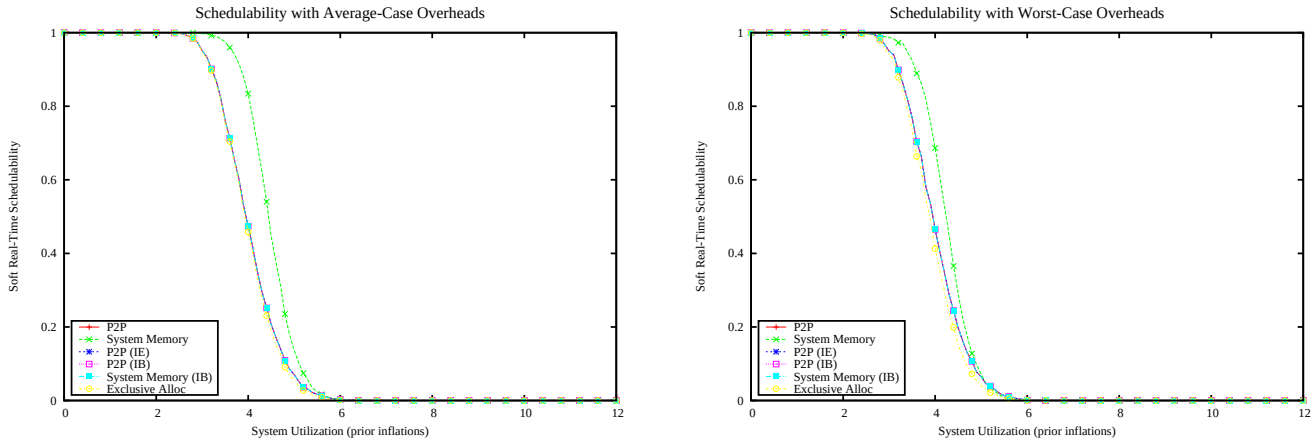

Figure 2273: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

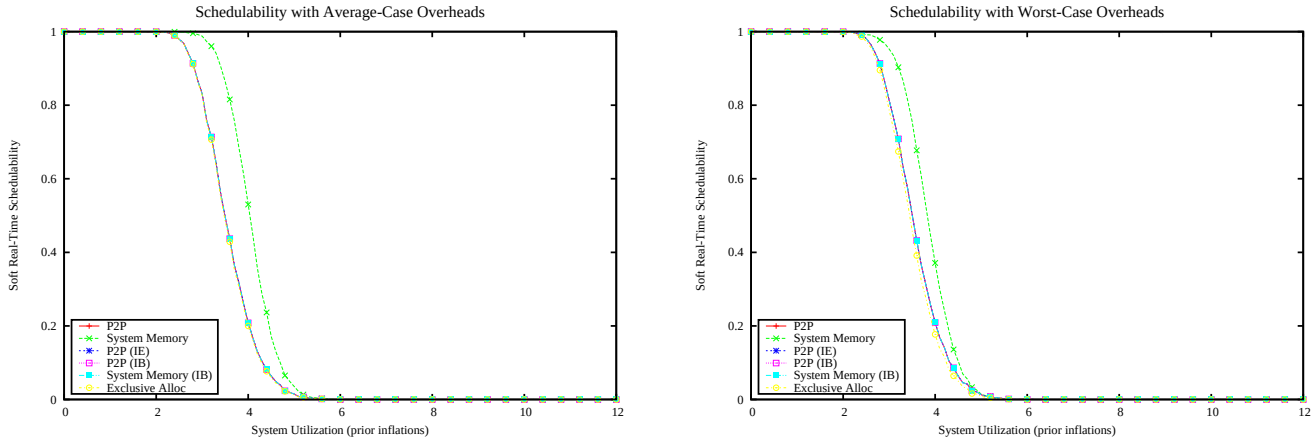

Figure 2274: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

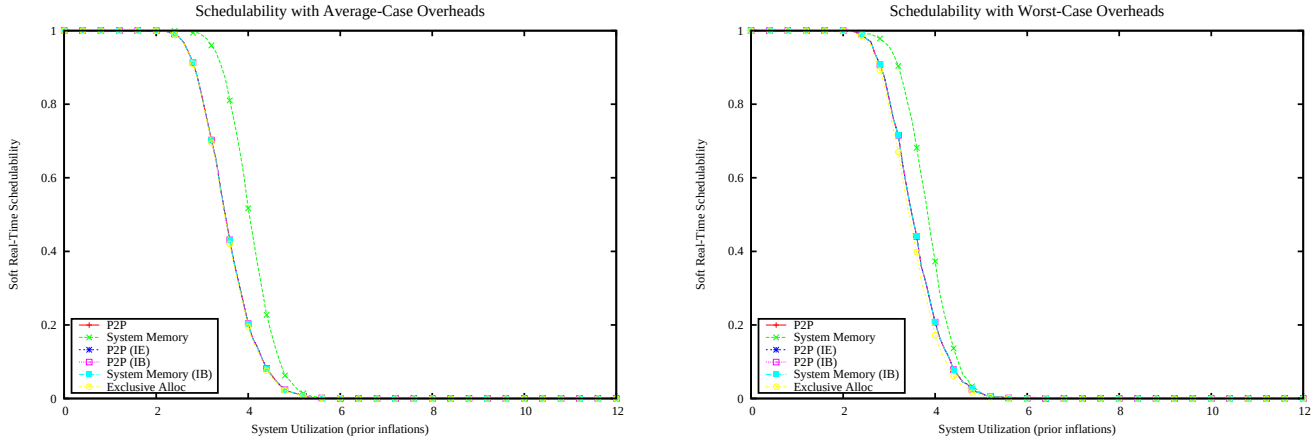

Figure 2275: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

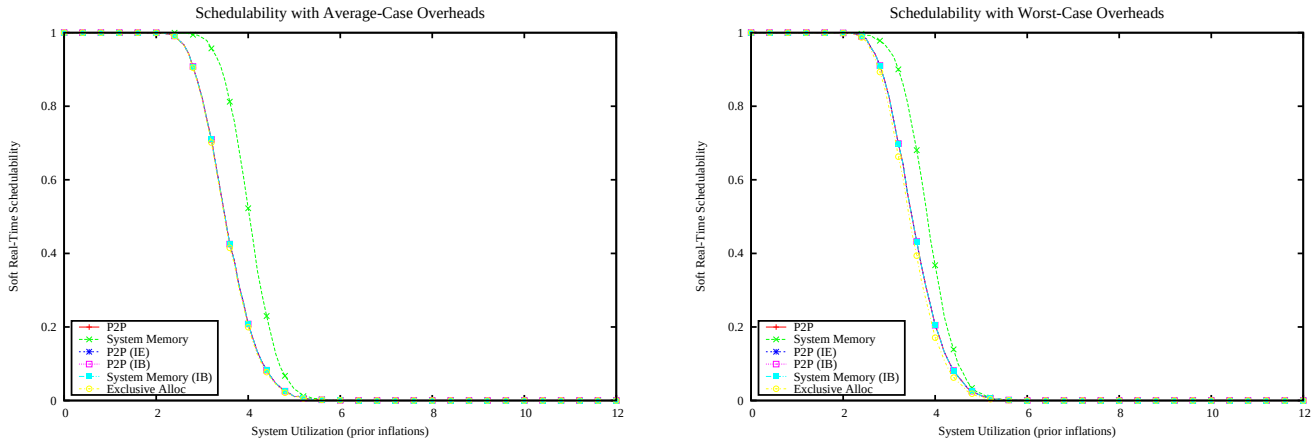

Figure 2276: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

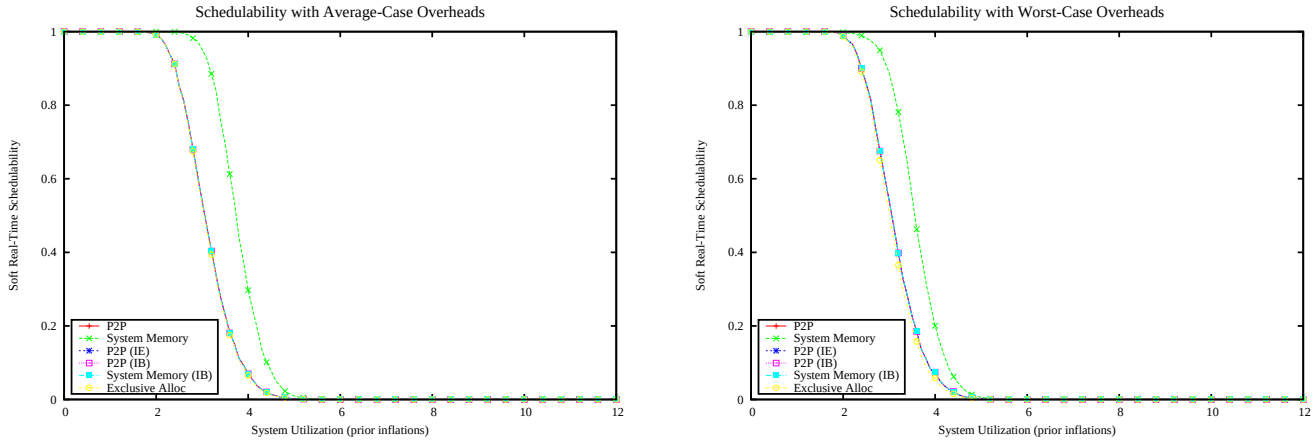

Figure 2277: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

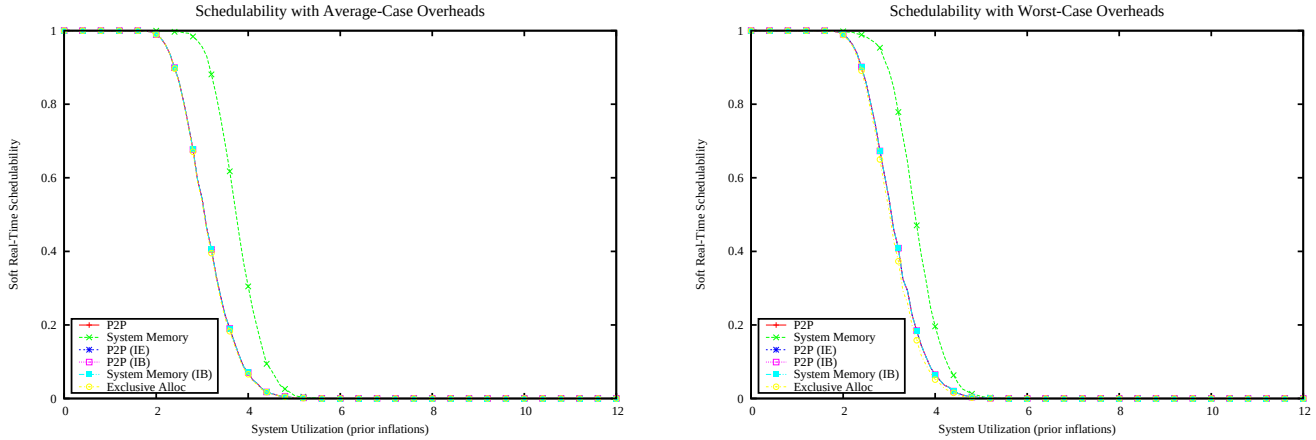

Figure 2278: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

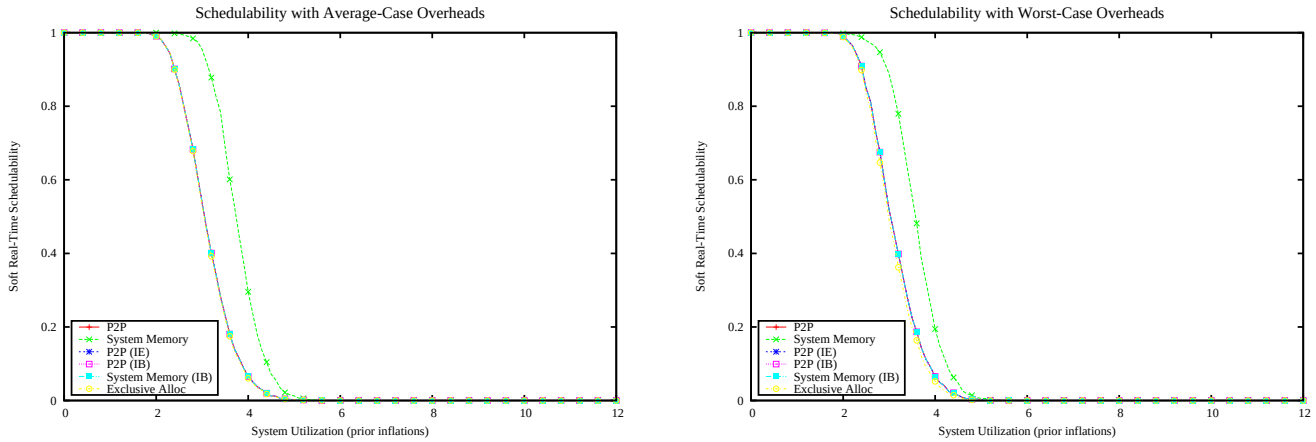

Figure 2279: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

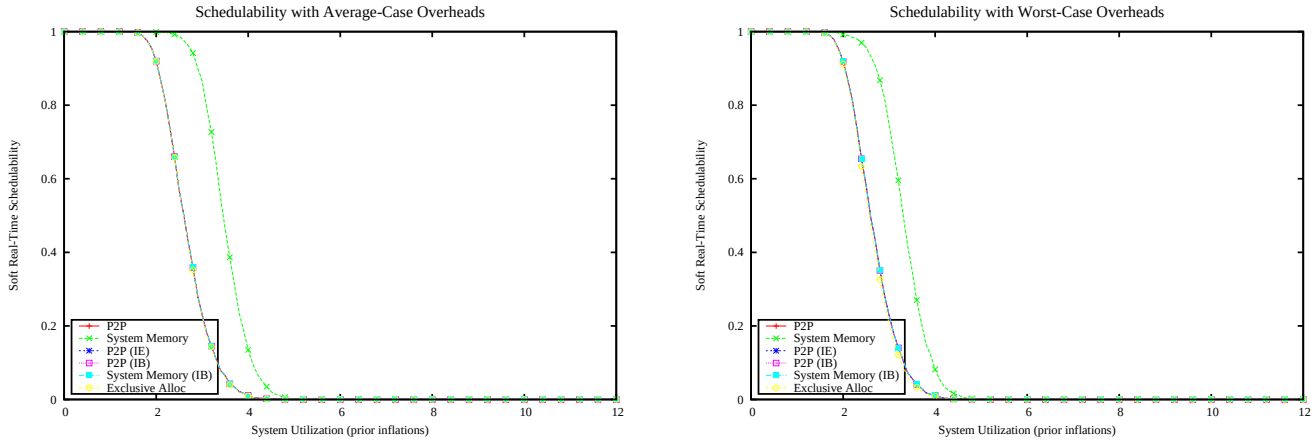

Figure 2280: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

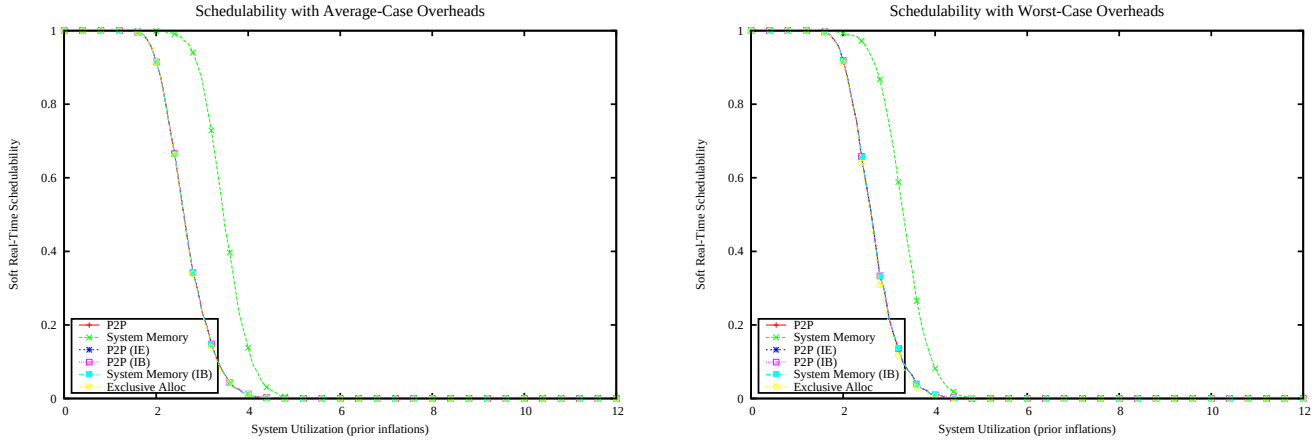

Figure 2281: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

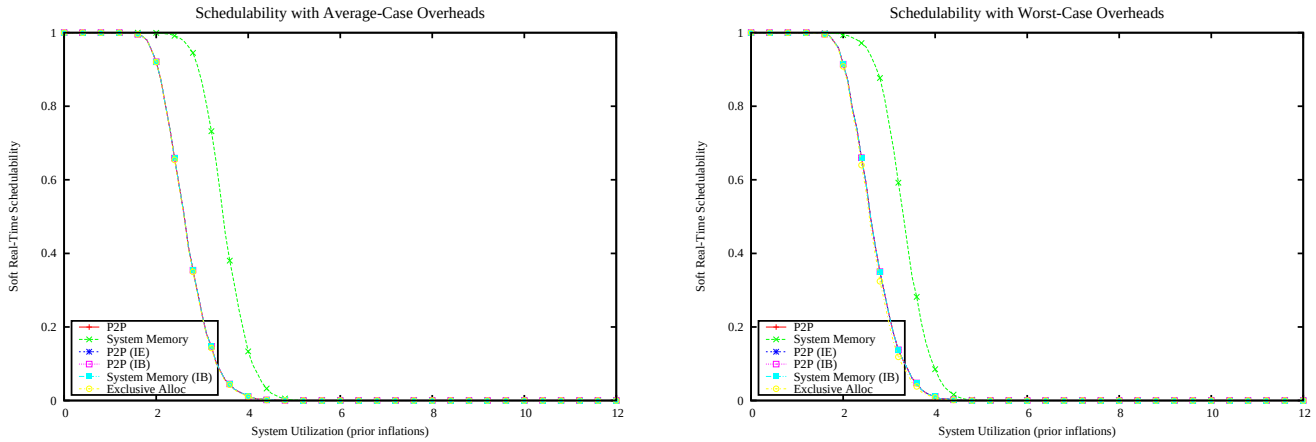

Figure 2282: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

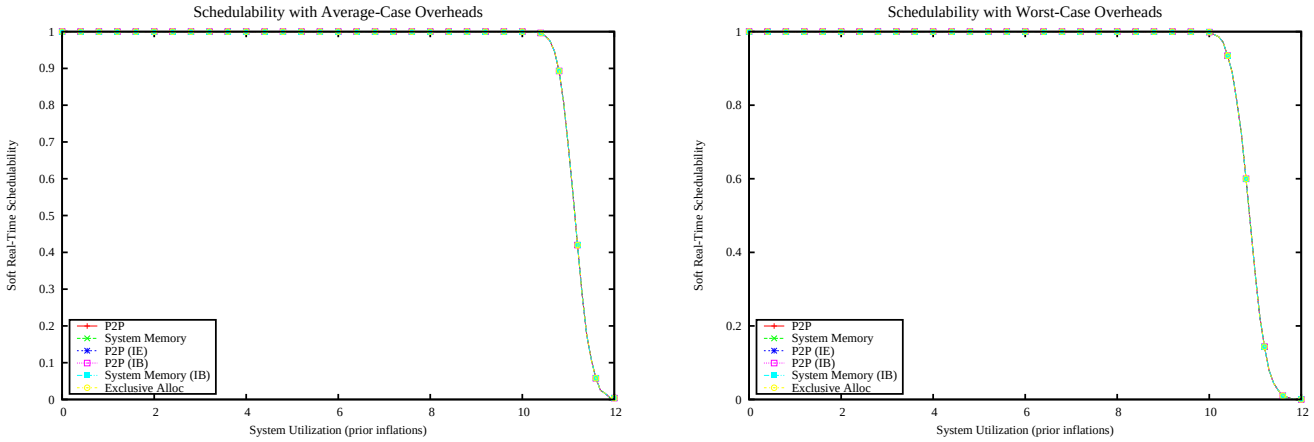

Figure 2283: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

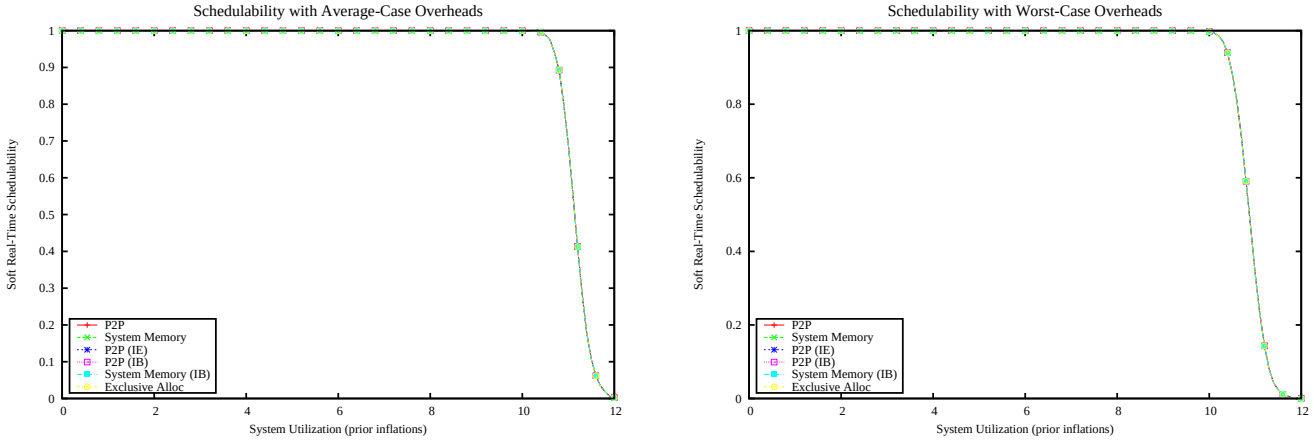

Figure 2284: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

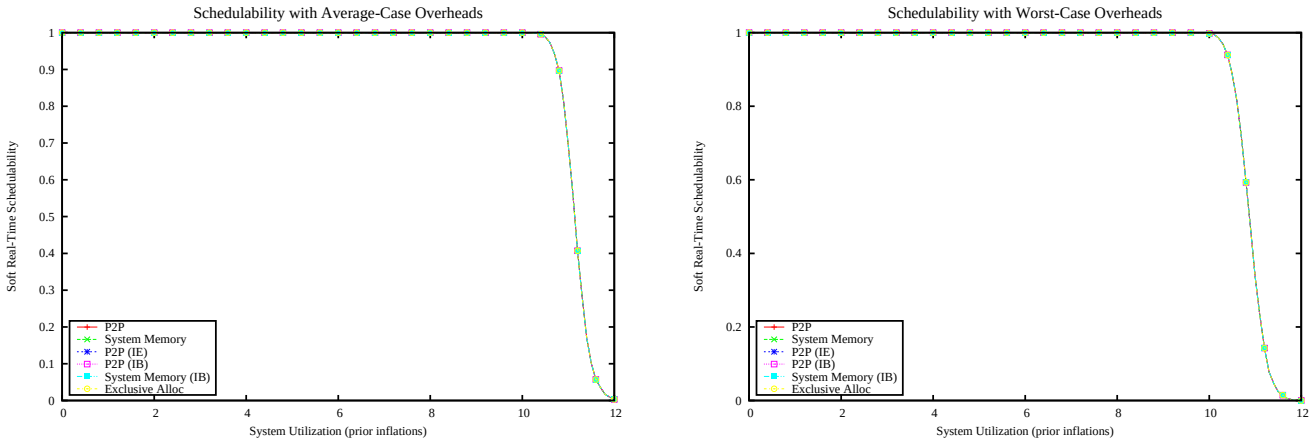

Figure 2285: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

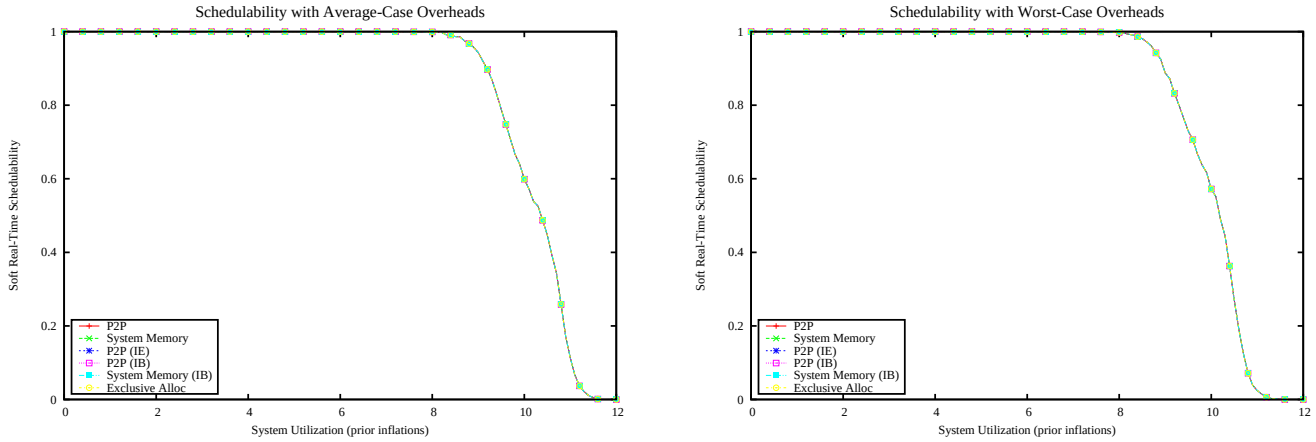

Figure 2286: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

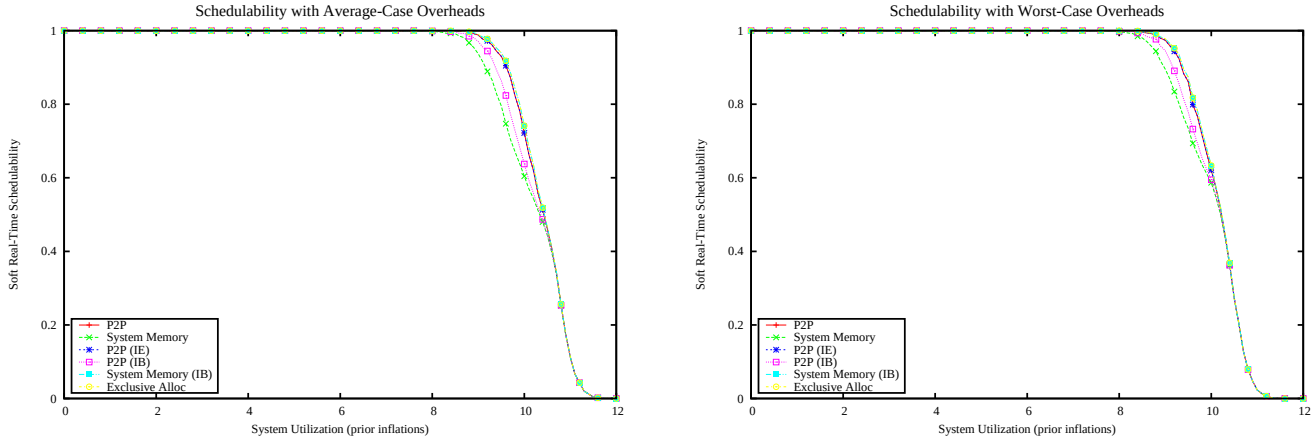

Figure 2287: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

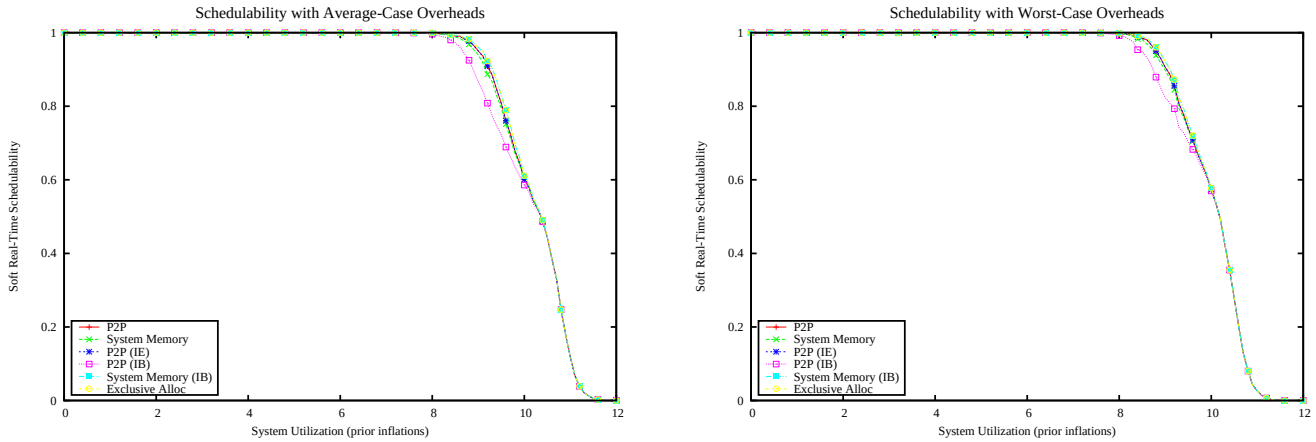

Figure 2288: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

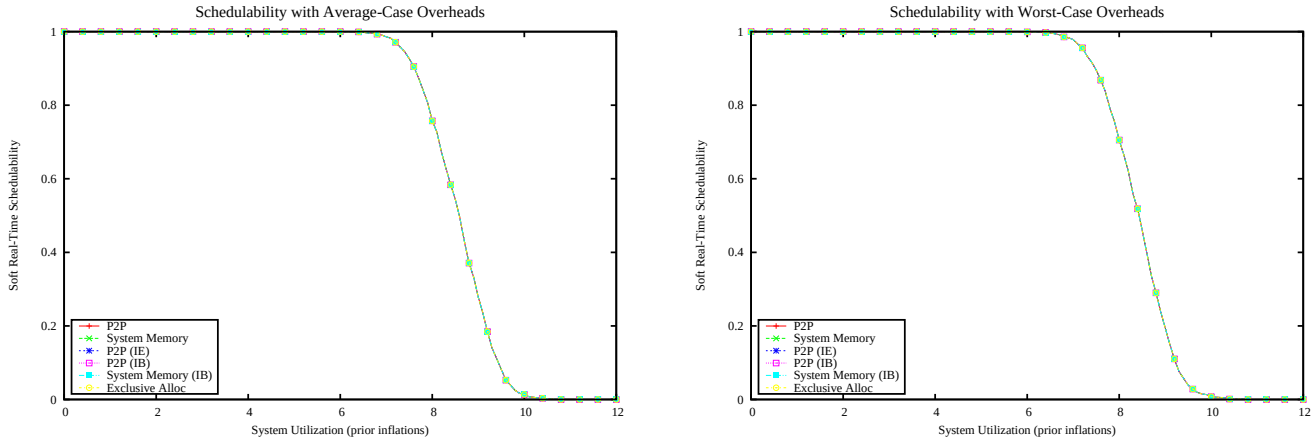

Figure 2289: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

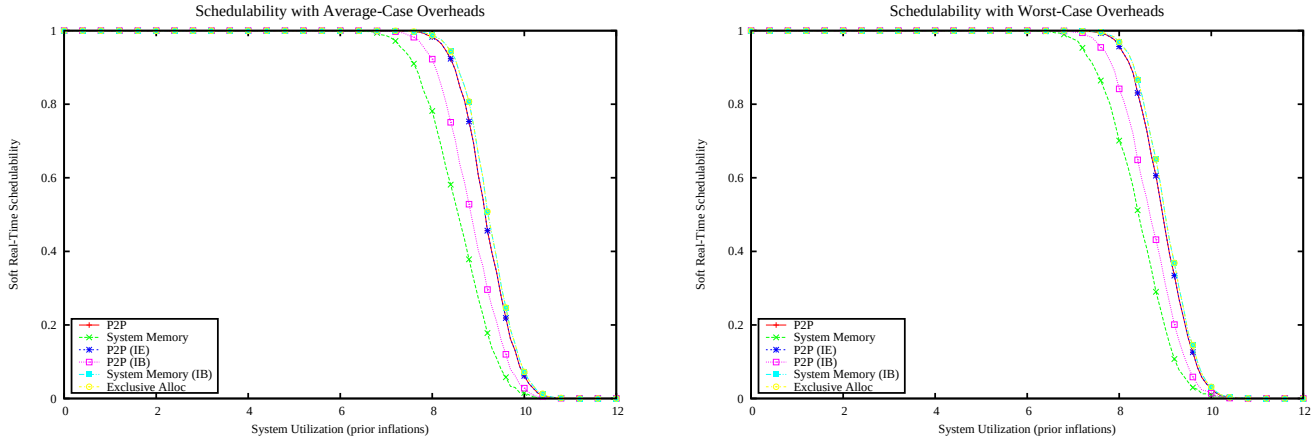

Figure 2290: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

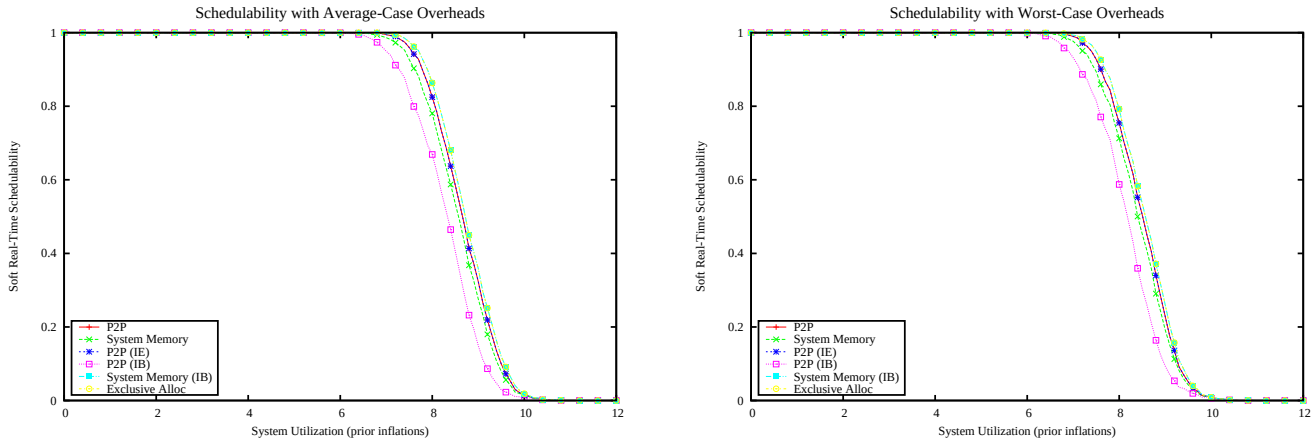

Figure 2291: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

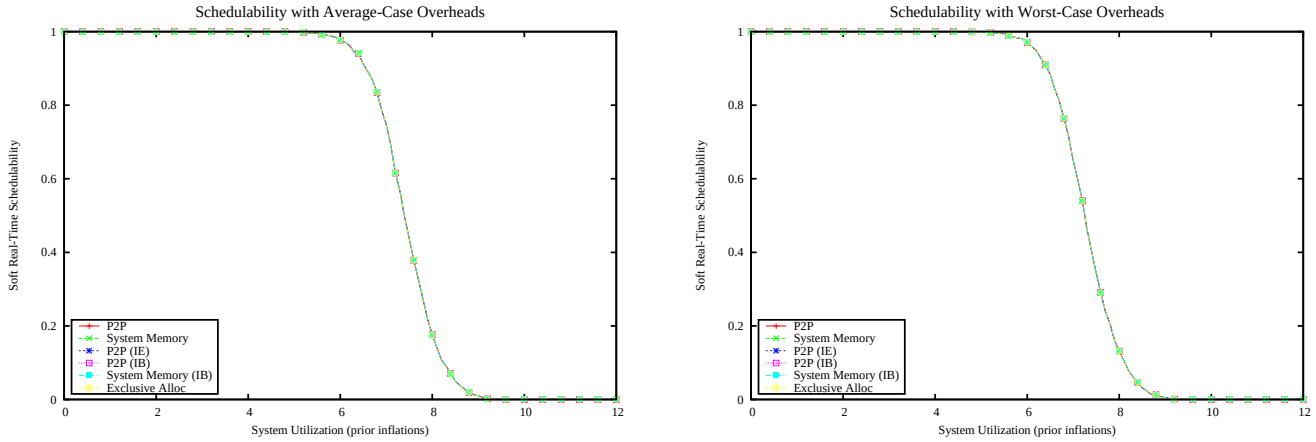

Figure 2292: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

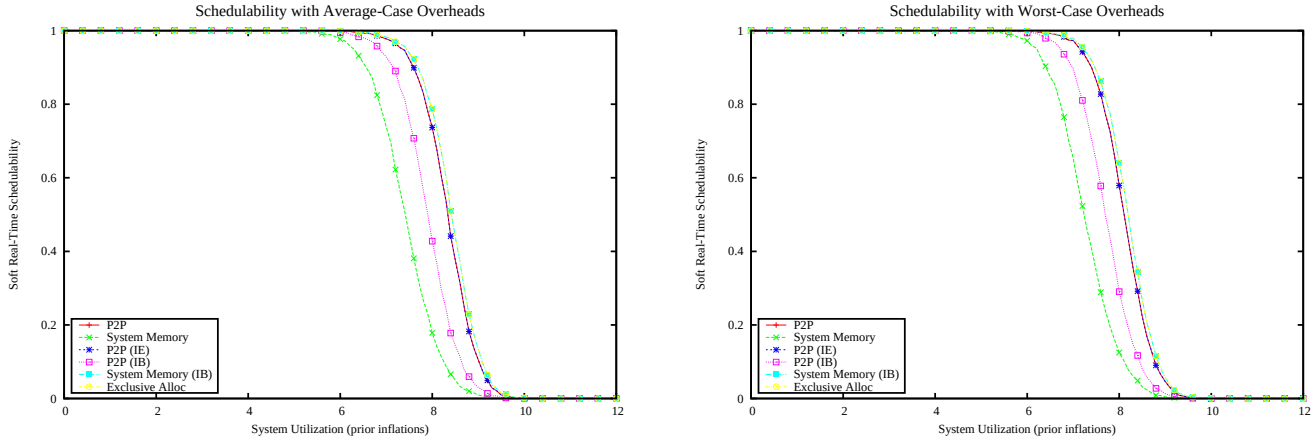

Figure 2293: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

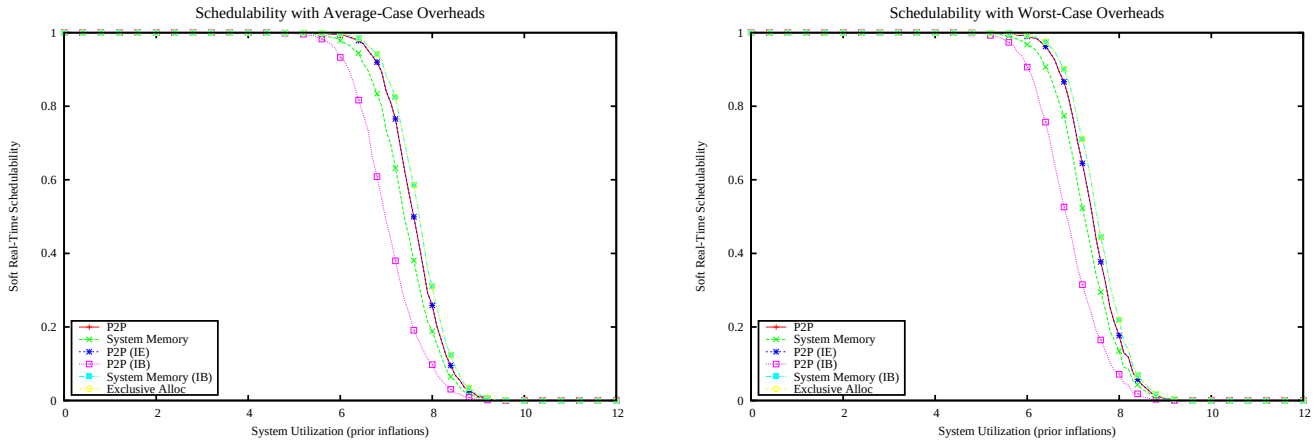

Figure 2294: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

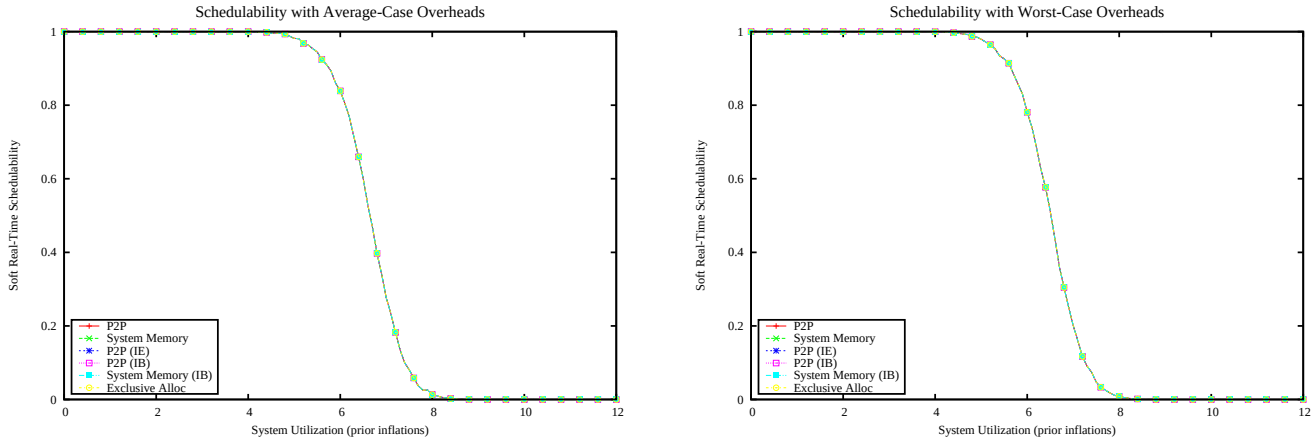

Figure 2295: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

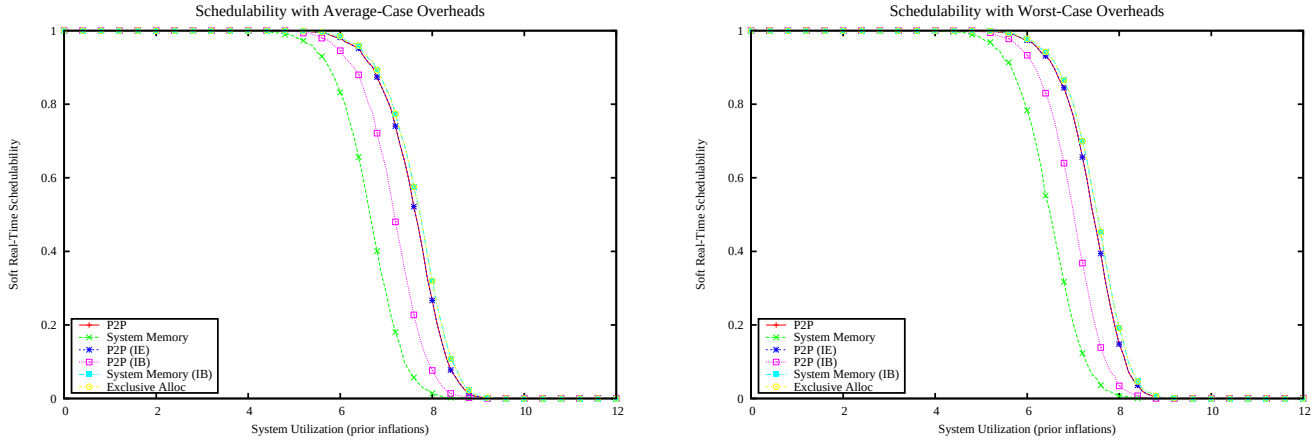

Figure 2296: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

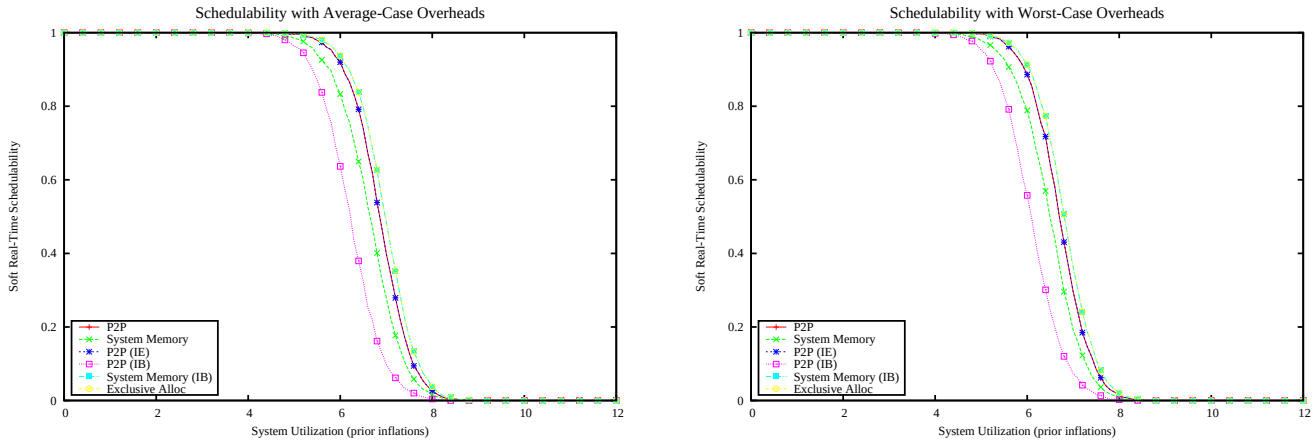

Figure 2297: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

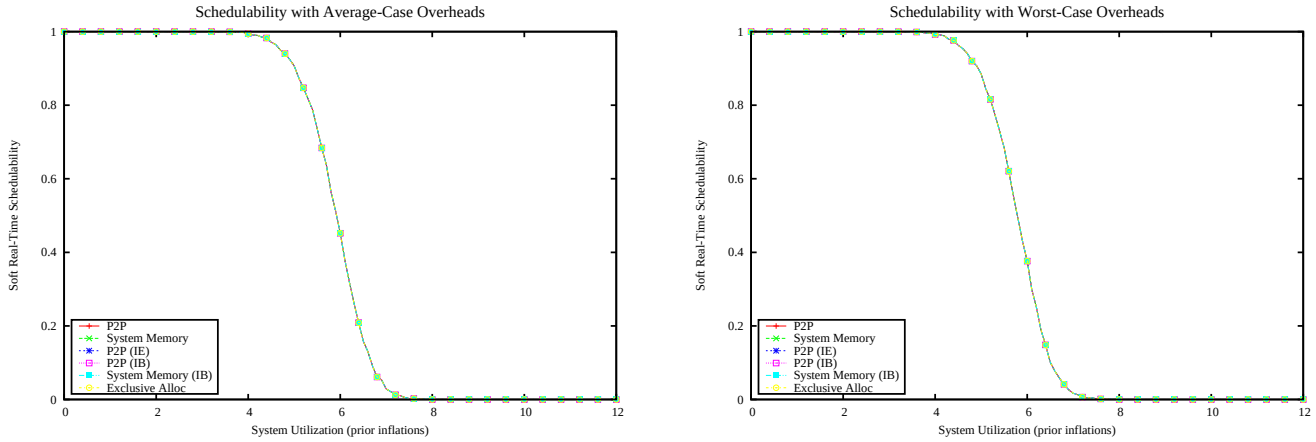

Figure 2298: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

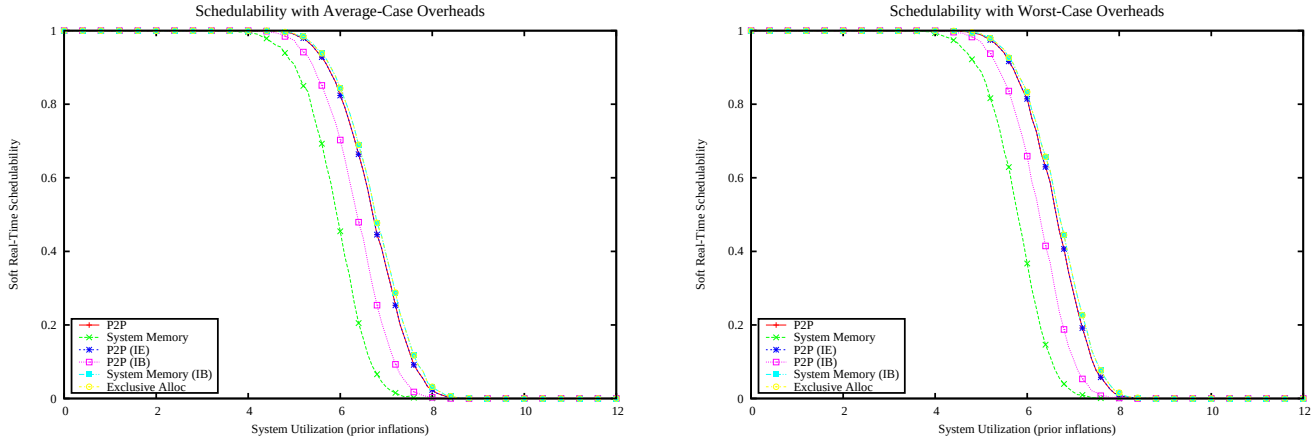

Figure 2299: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

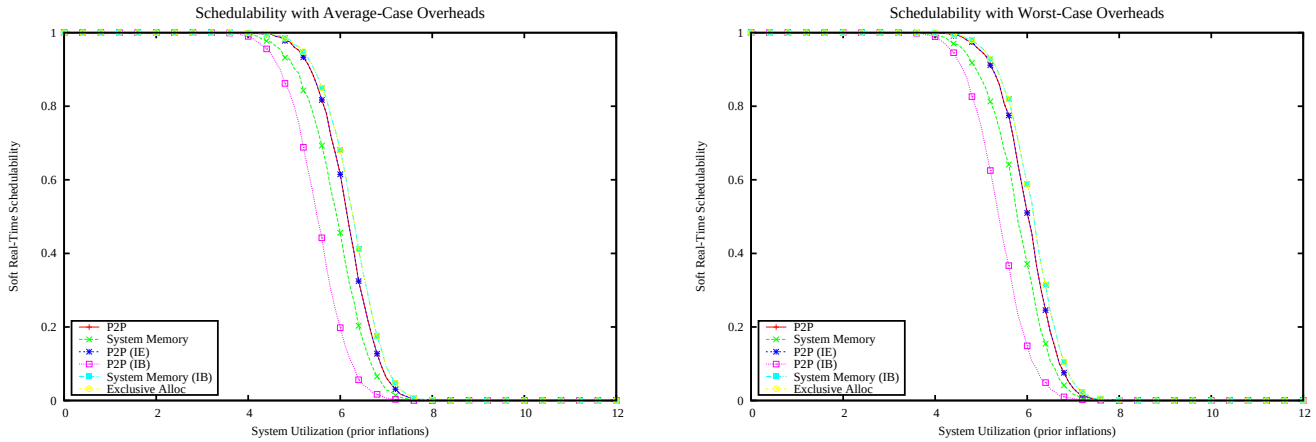

Figure 2300: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

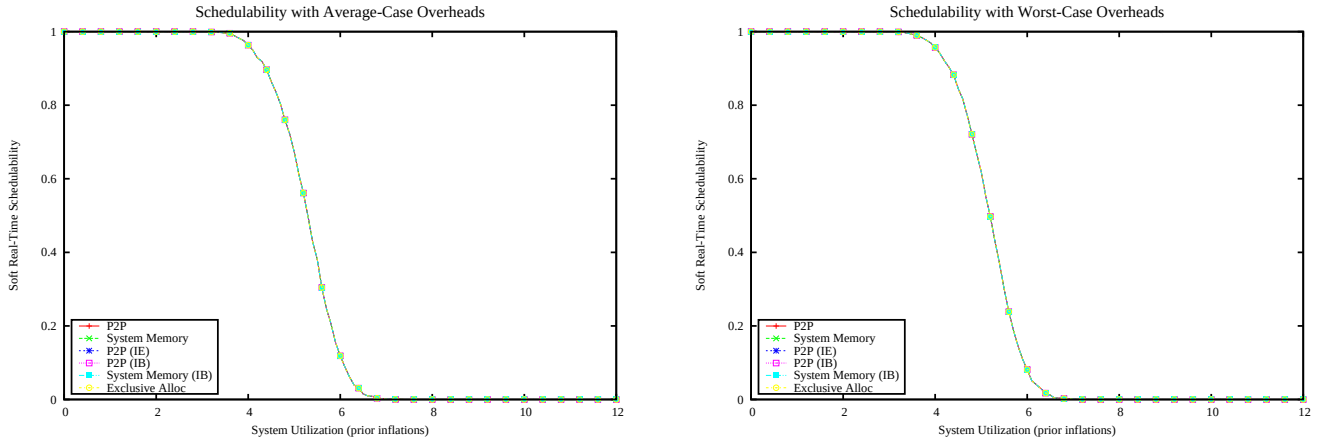

Figure 2301: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

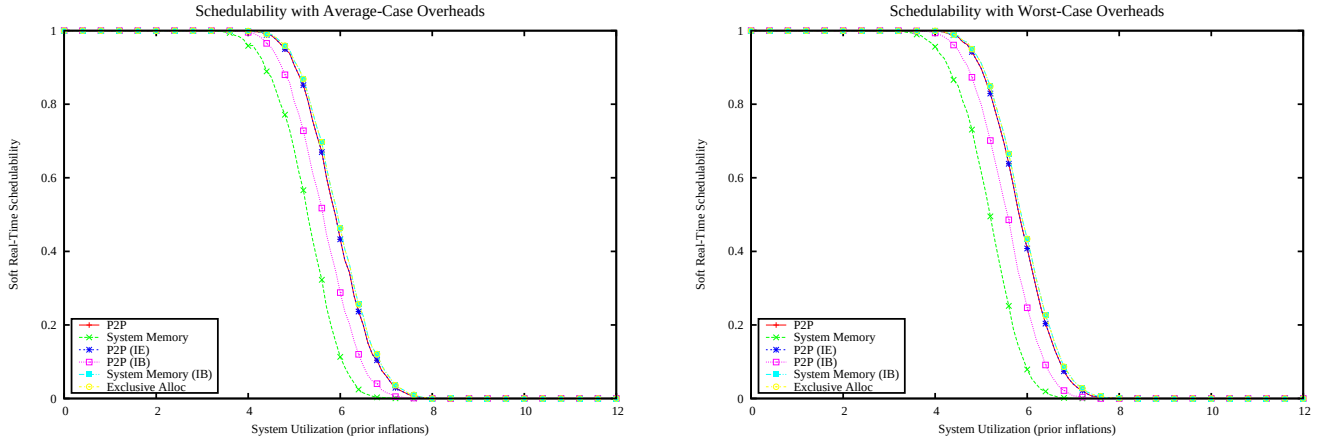

Figure 2302: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

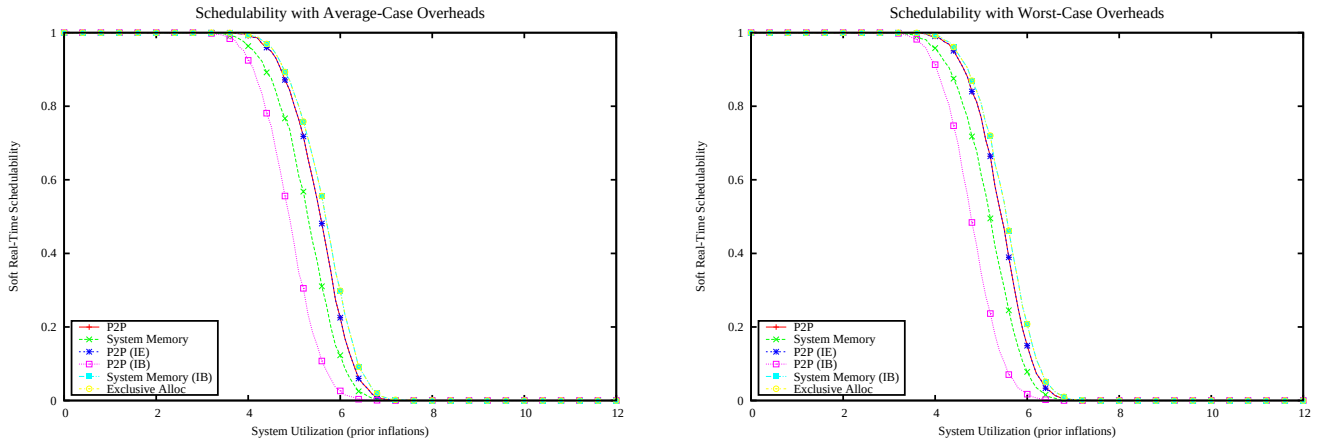

Figure 2303: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

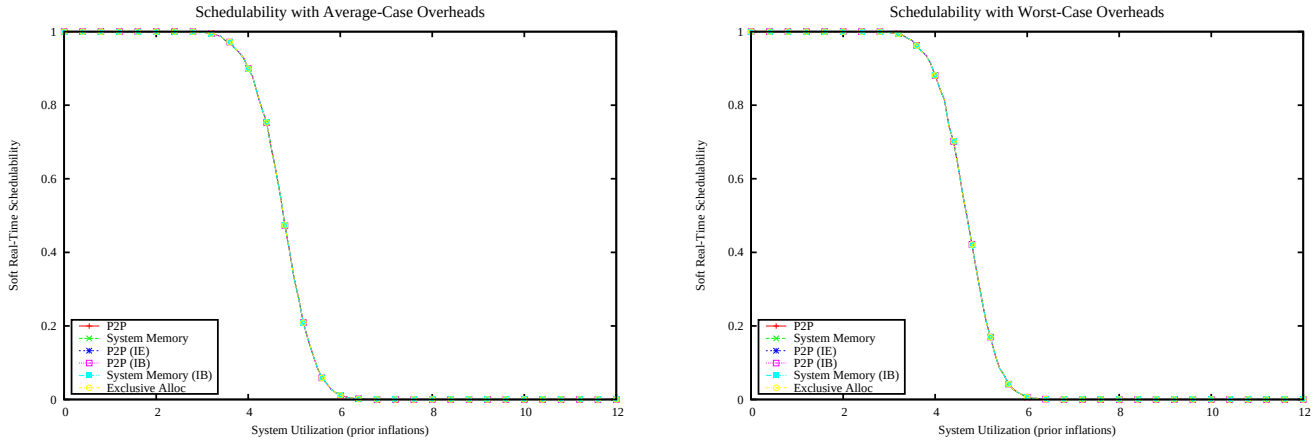

Figure 2304: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

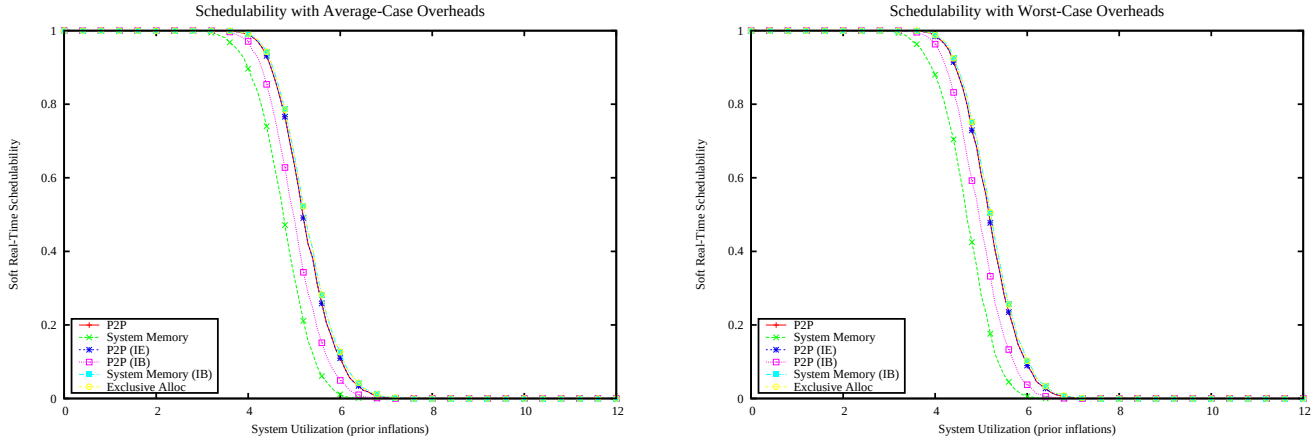

Figure 2305: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

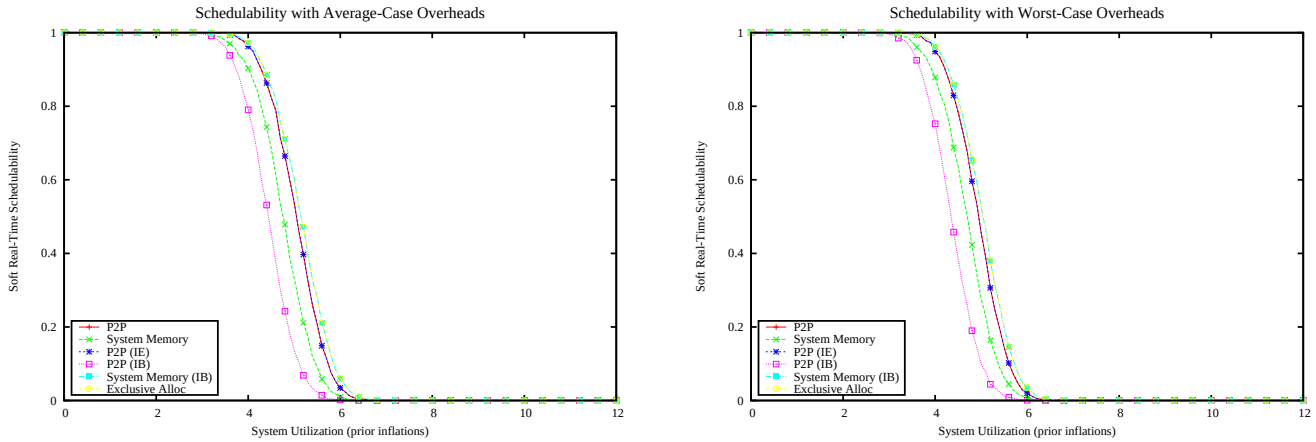

Figure 2306: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

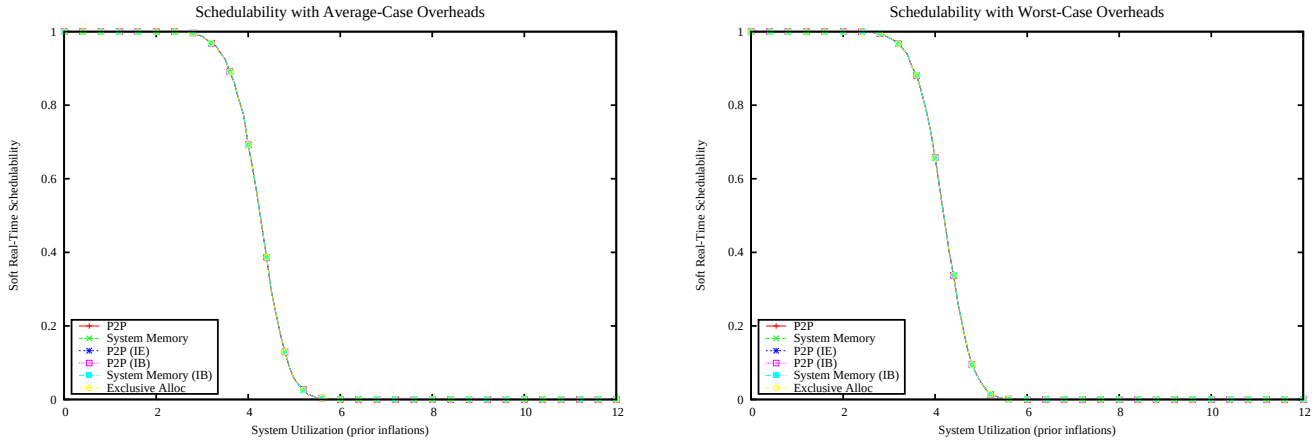

Figure 2307: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

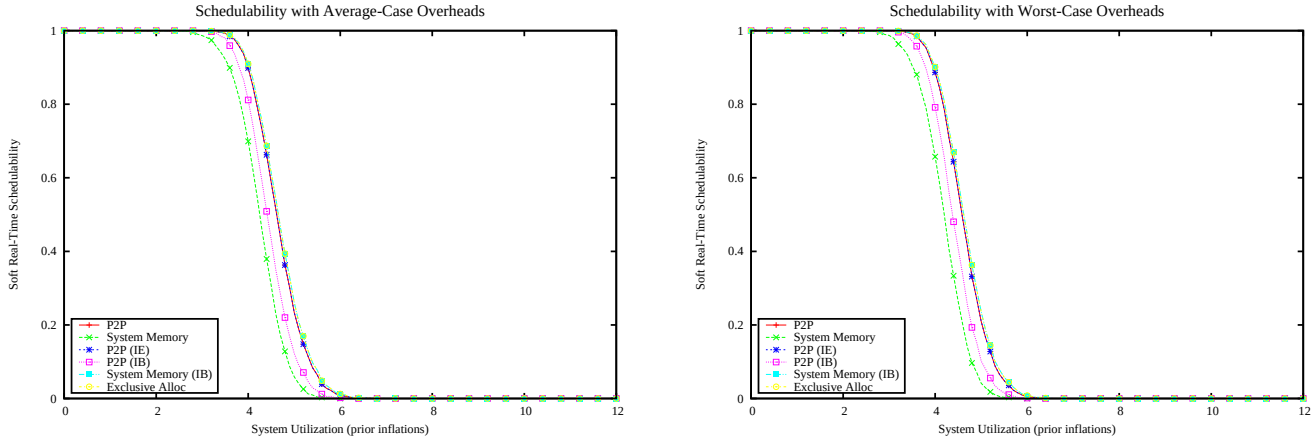

Figure 2308: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

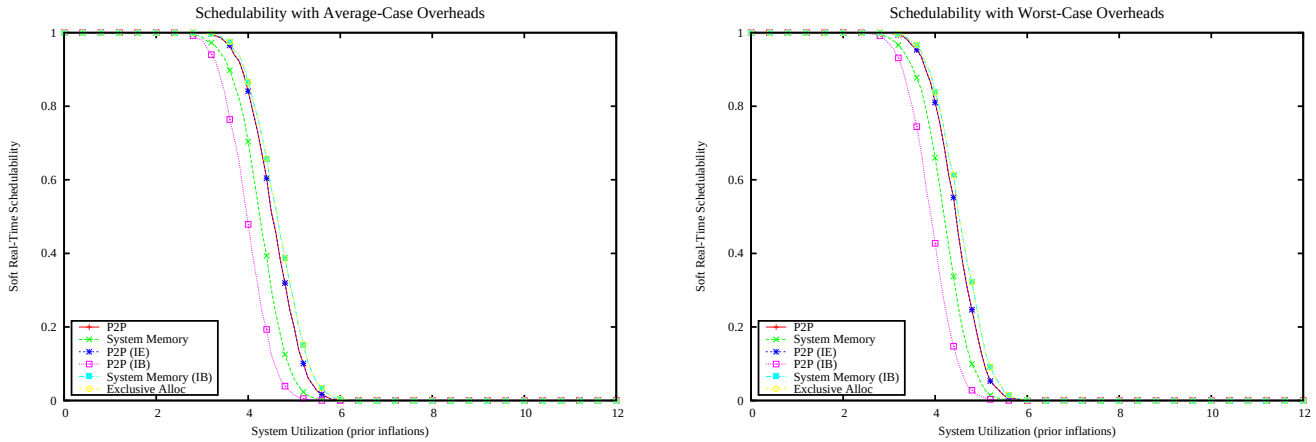

Figure 2309: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

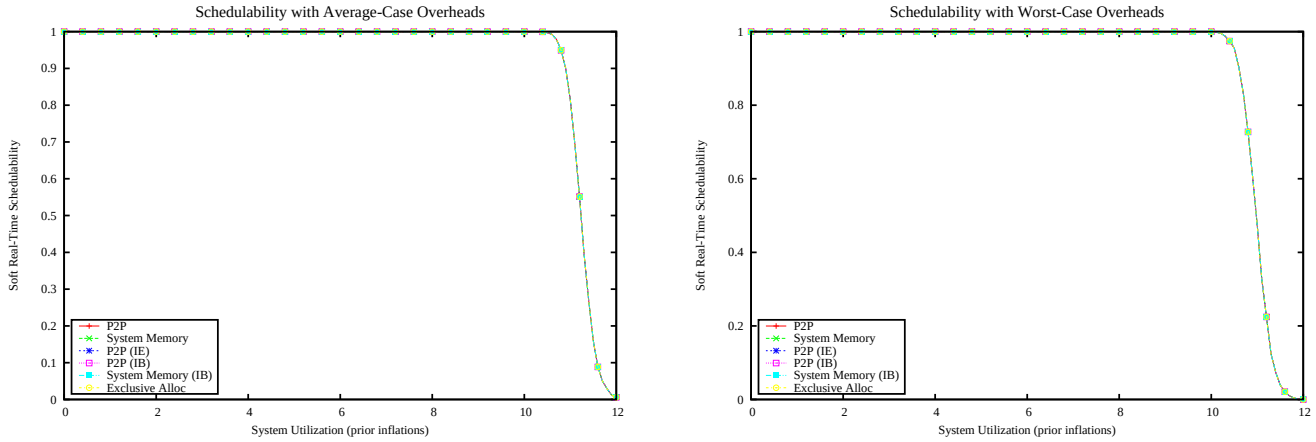

Figure 2310: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

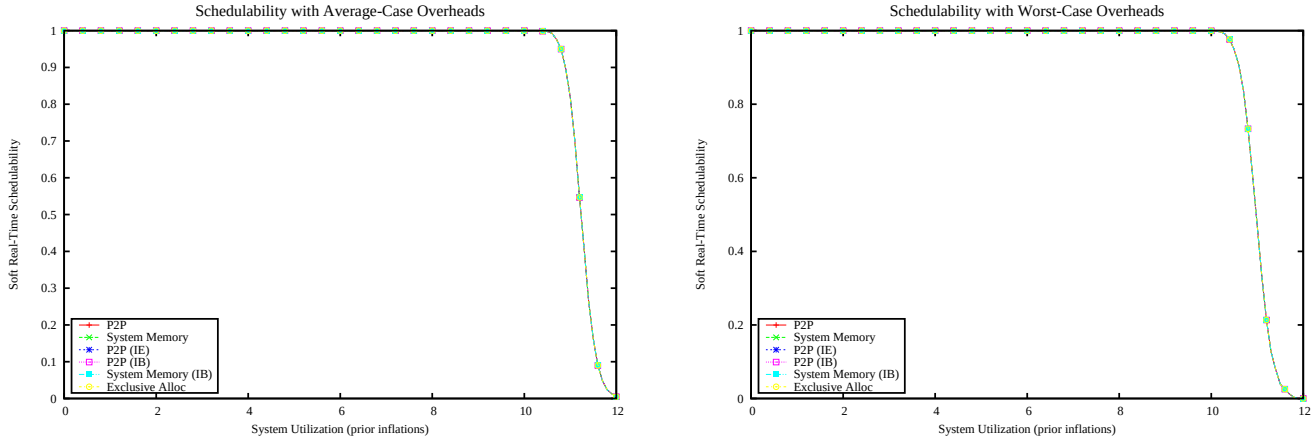

Figure 2311: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

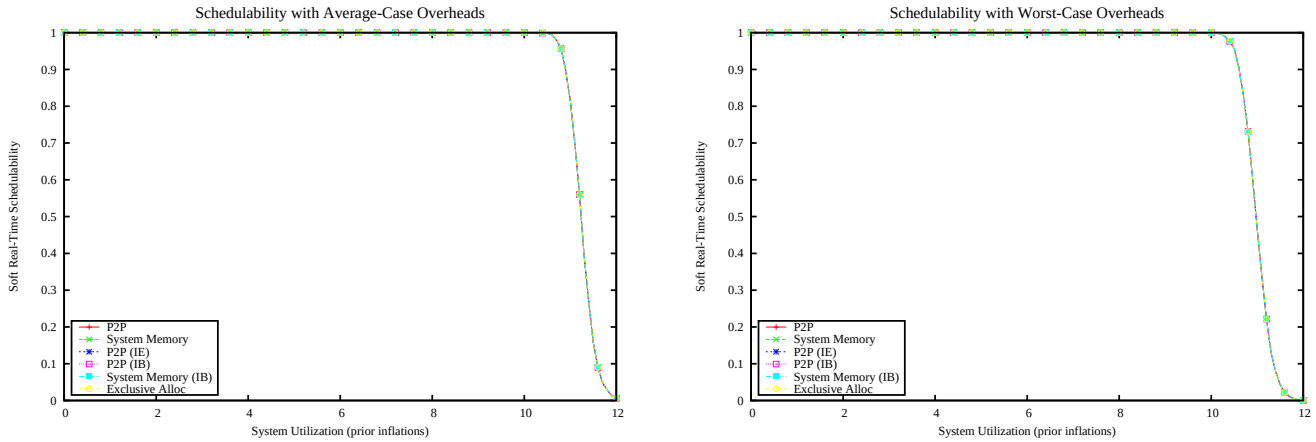

Figure 2312: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

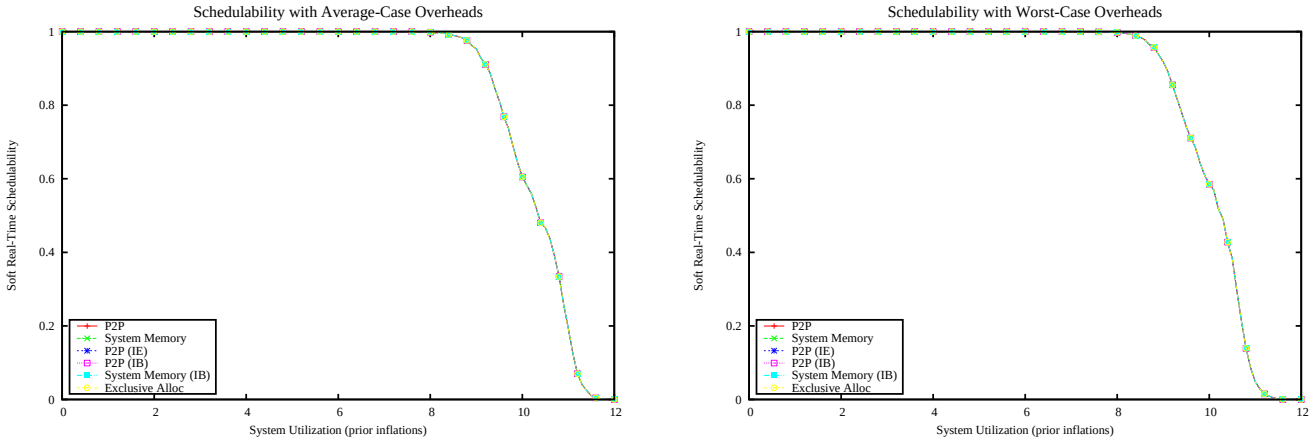

Figure 2313: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

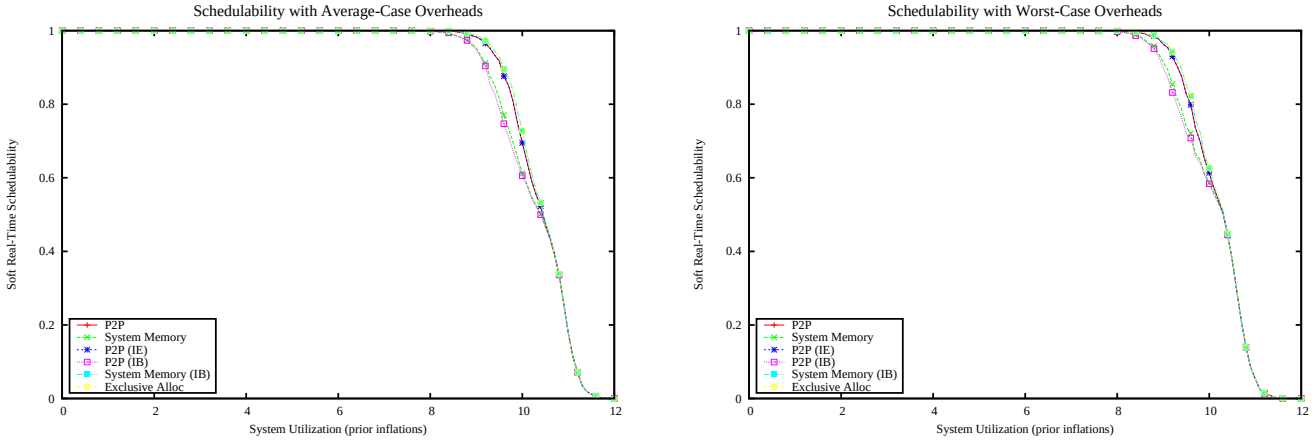

Figure 2314: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

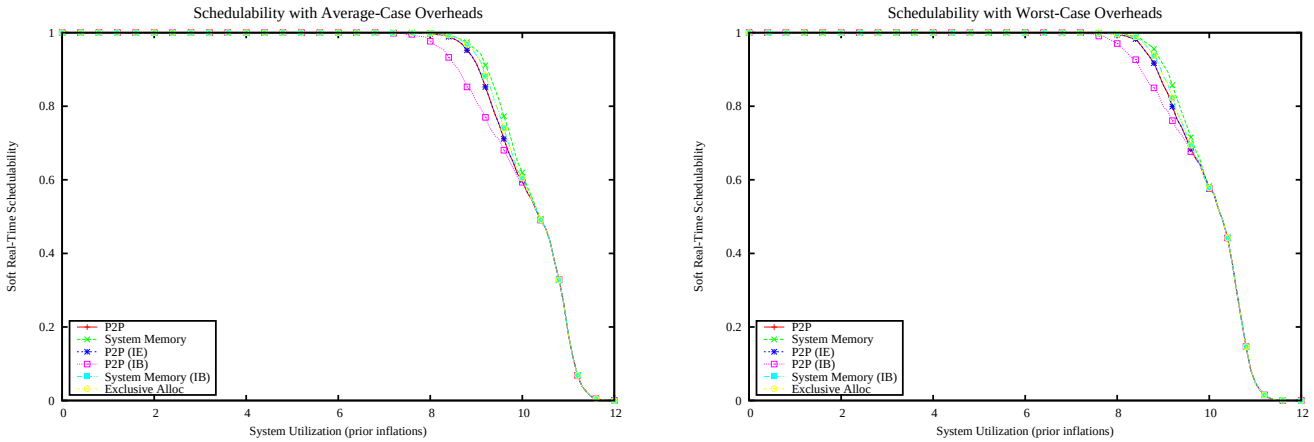

Figure 2315: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

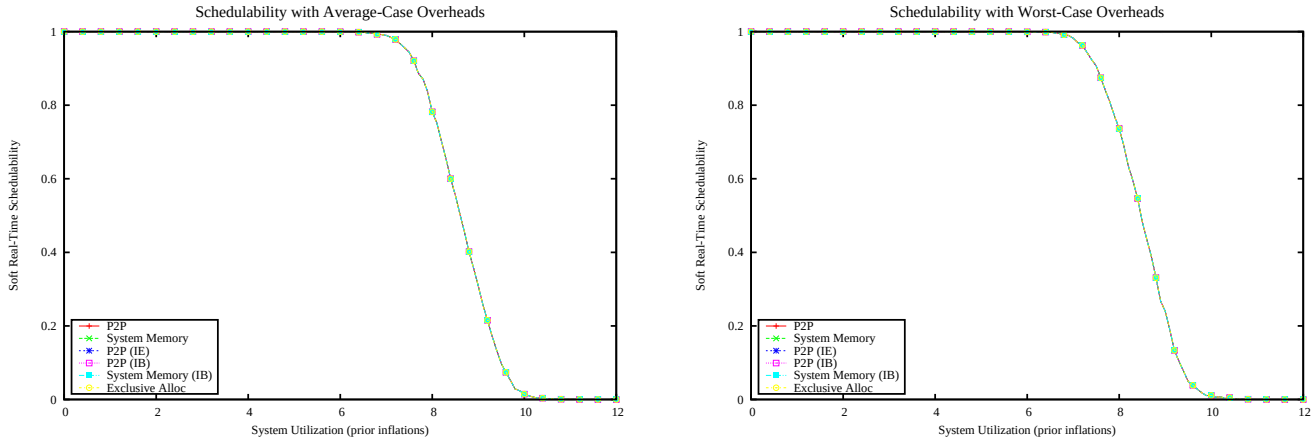

Figure 2316: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

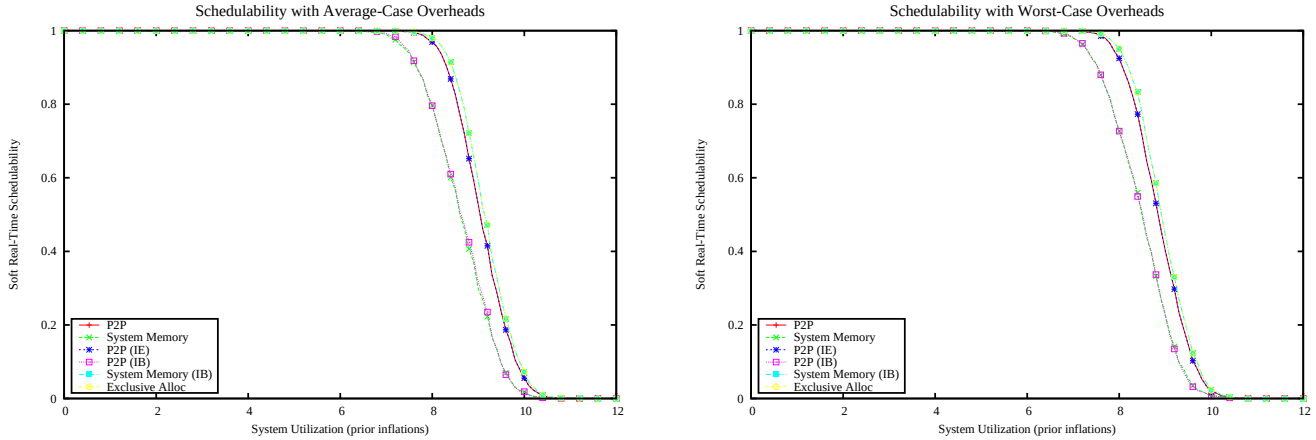

Figure 2317: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

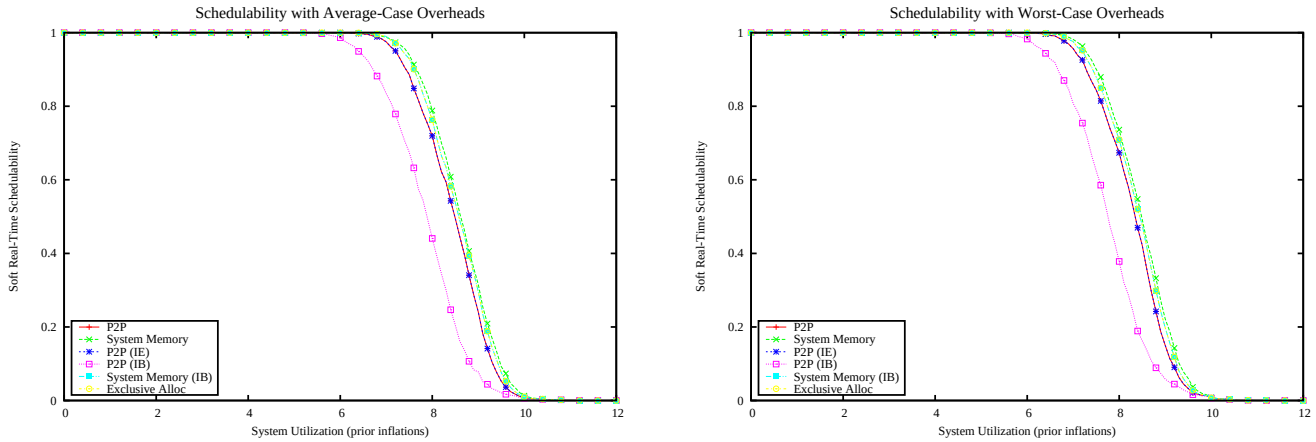

Figure 2318: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

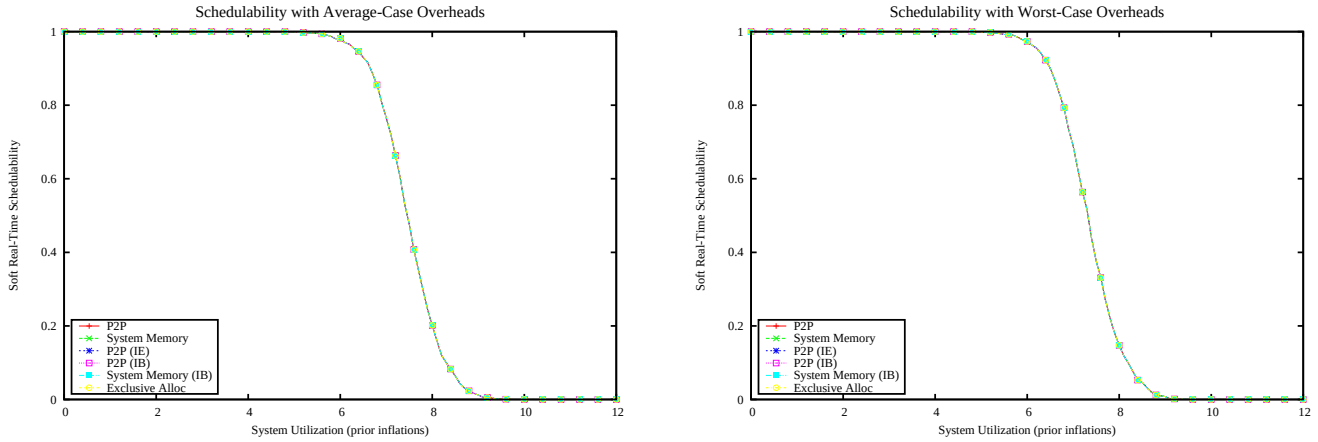

Figure 2319: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

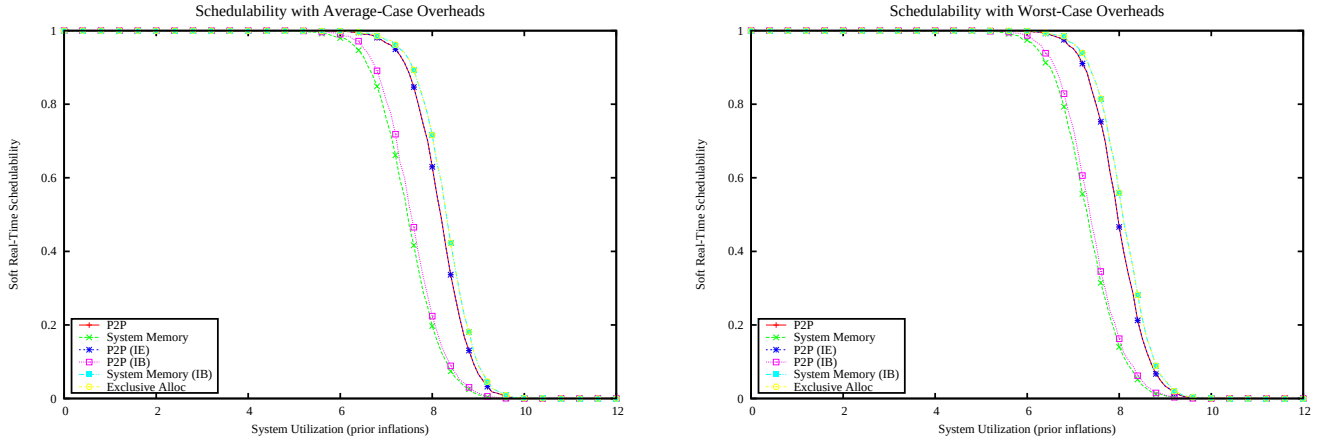

Figure 2320: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

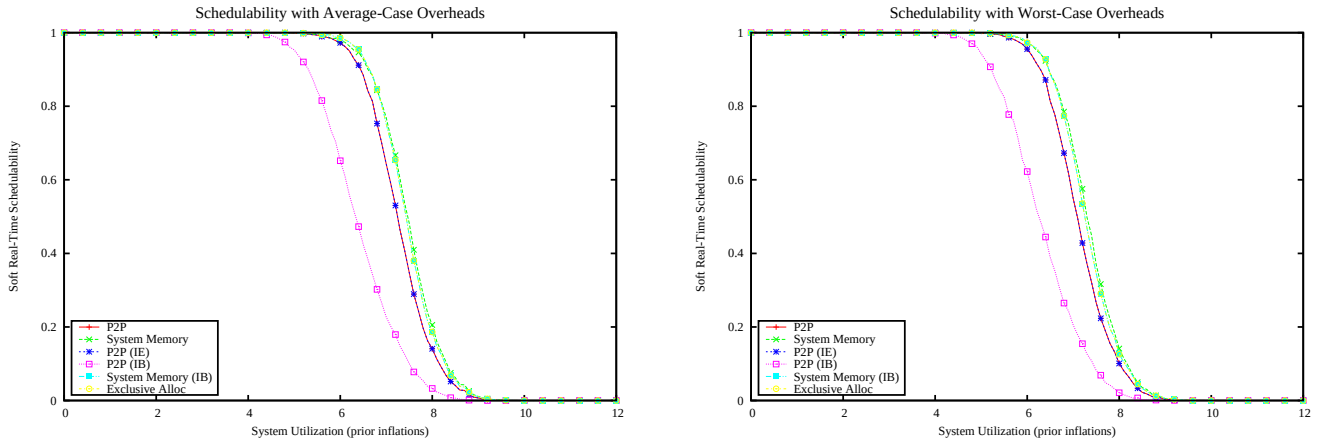

Figure 2321: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

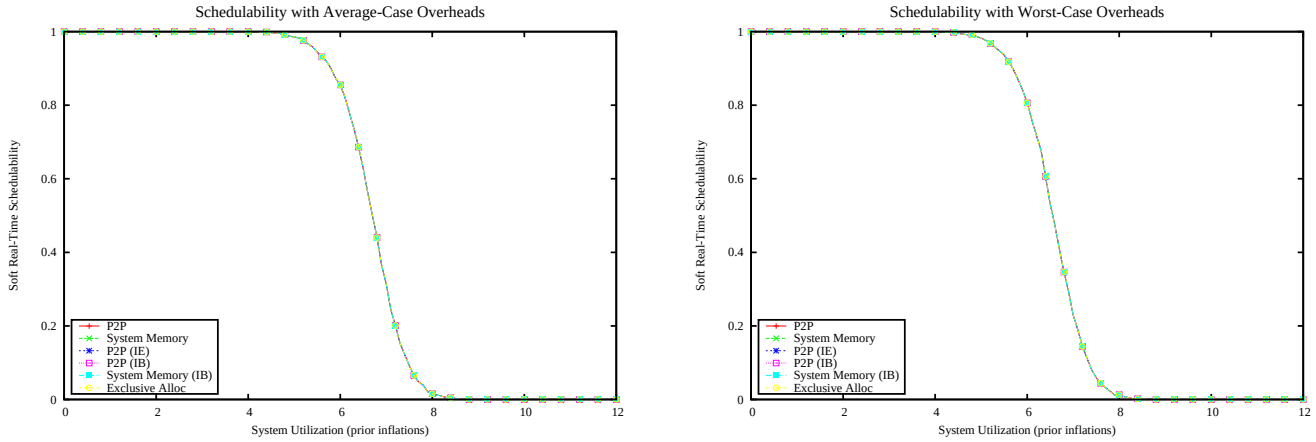

Figure 2322: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

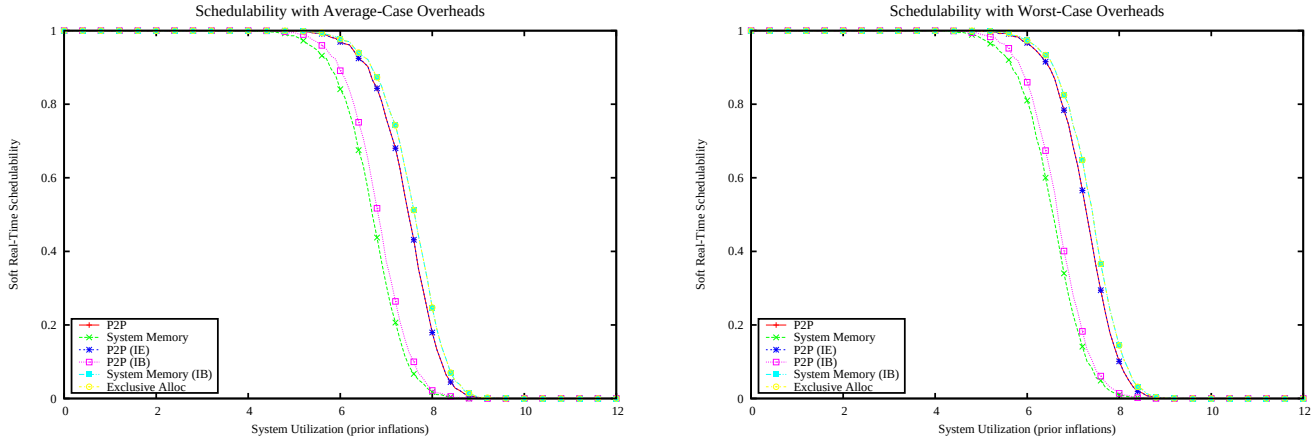

Figure 2323: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

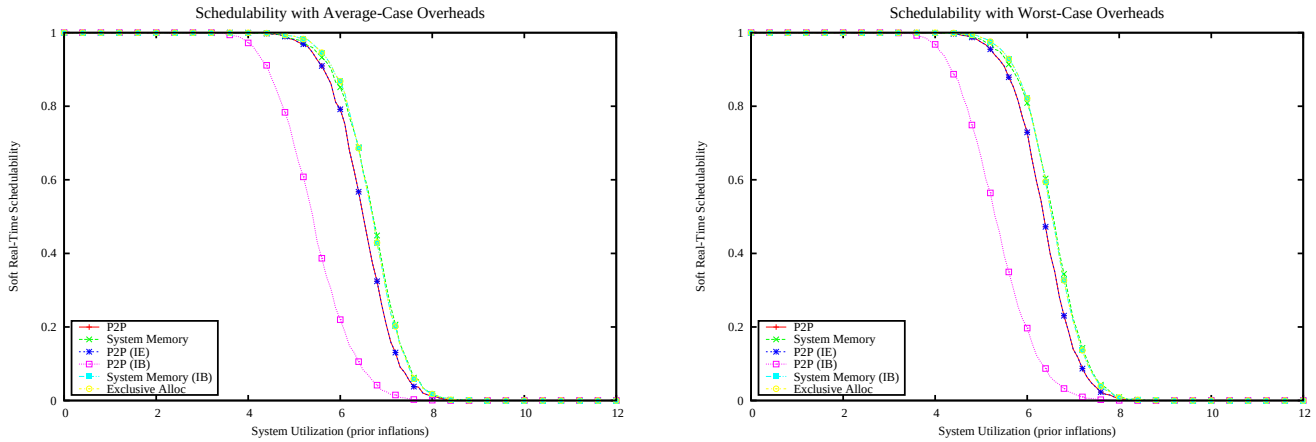

Figure 2324: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

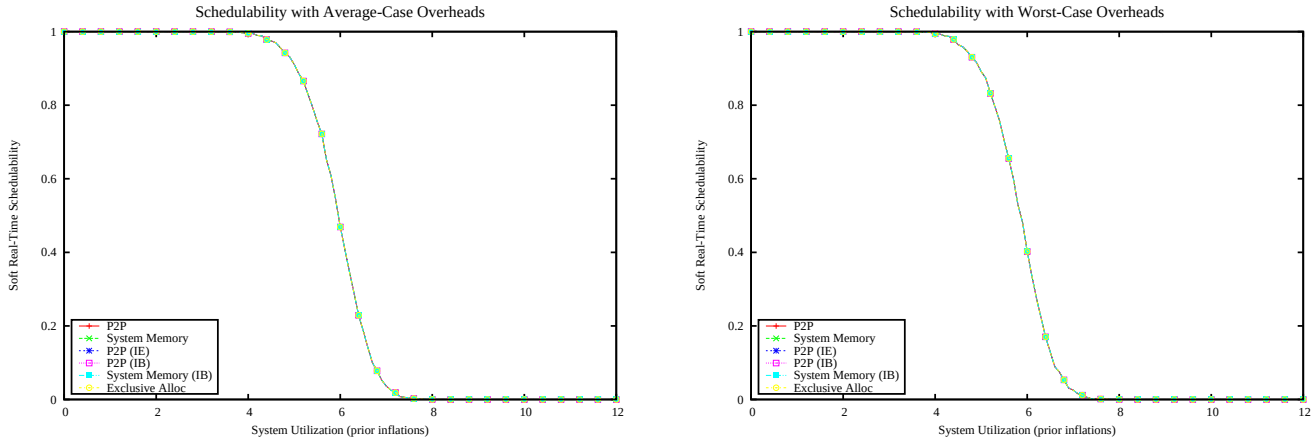

Figure 2325: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

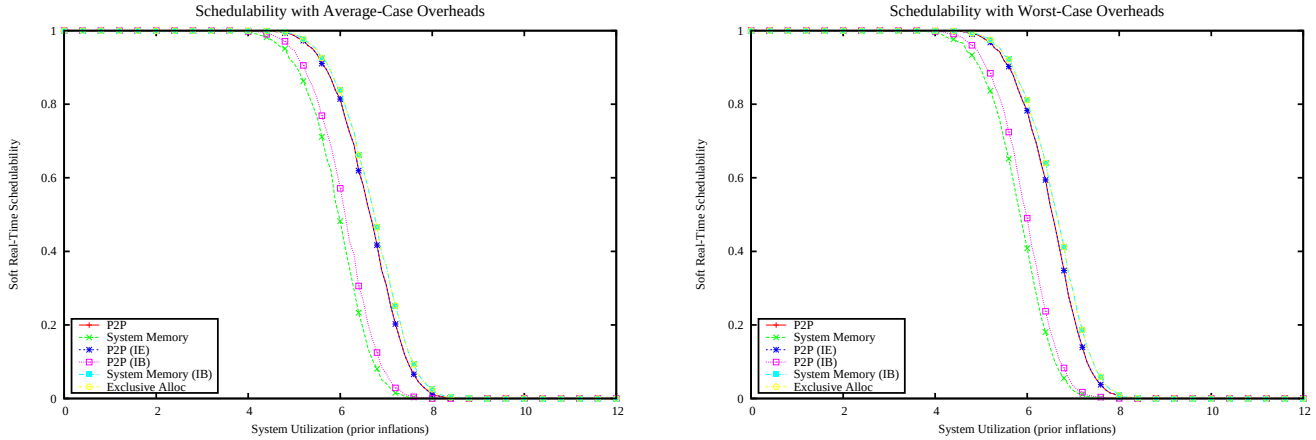

Figure 2326: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

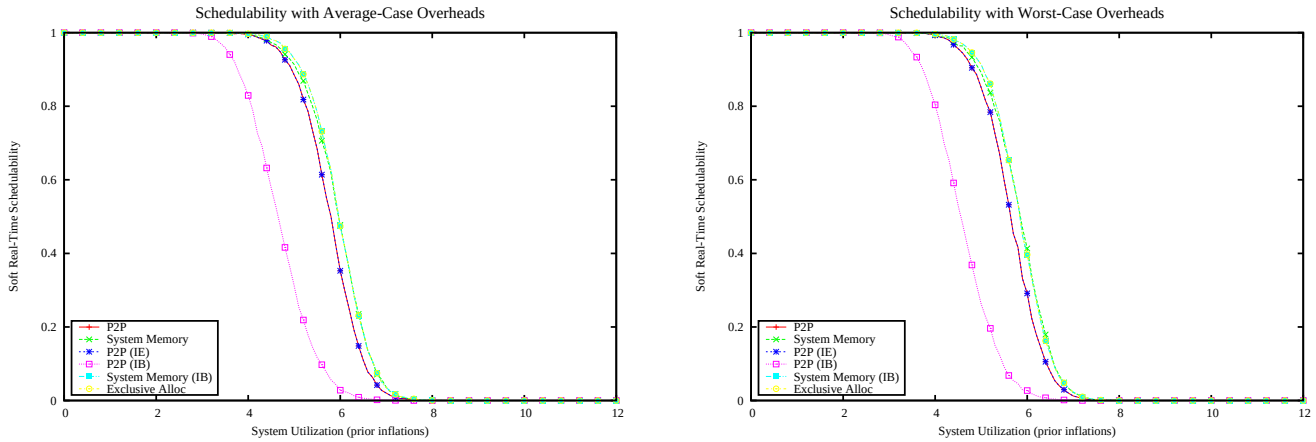

Figure 2327: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

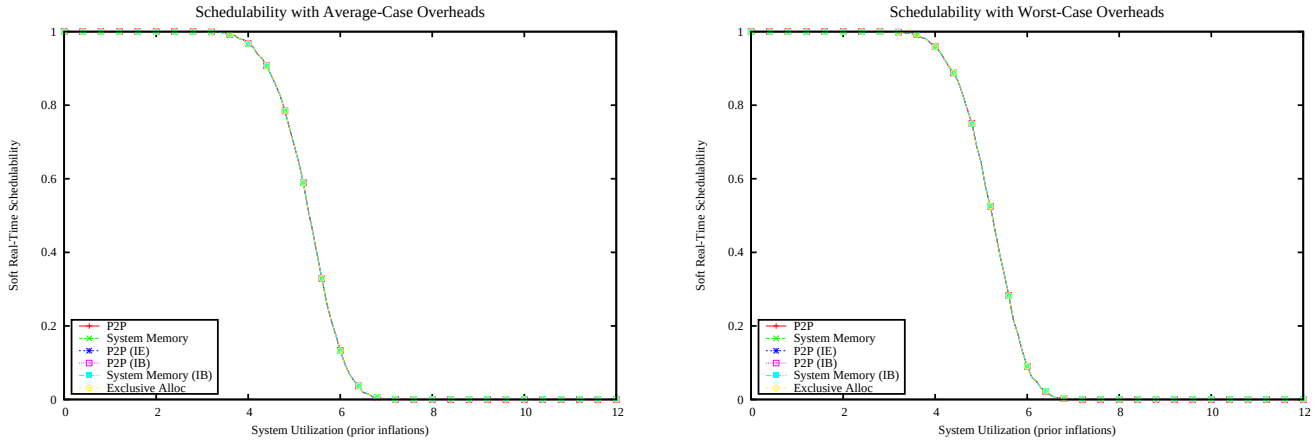

Figure 2328: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

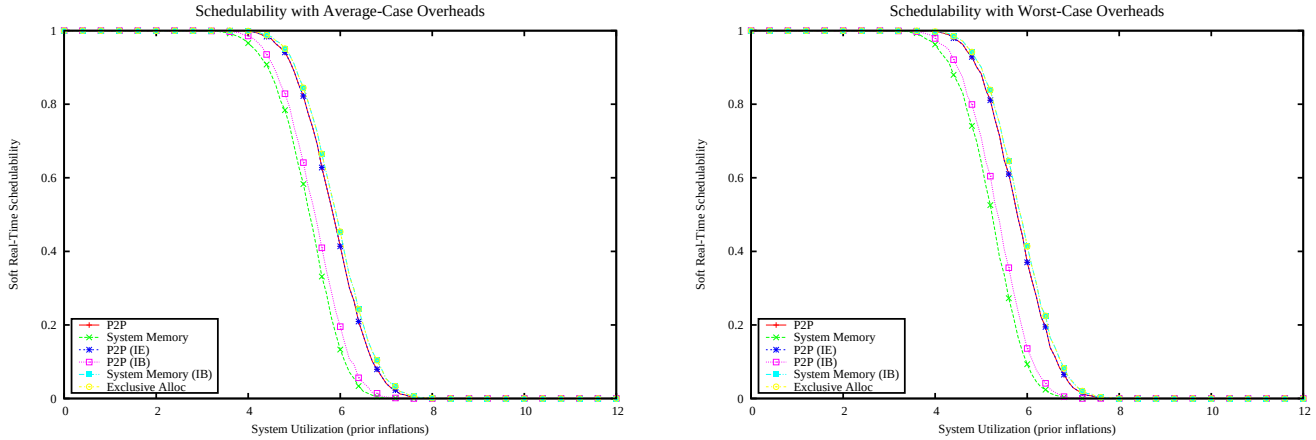

Figure 2329: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

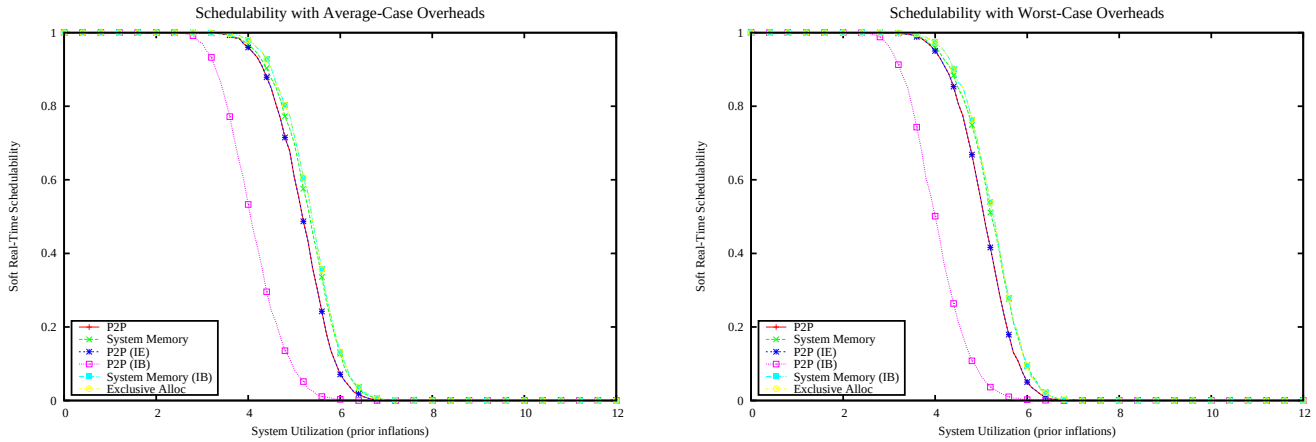

Figure 2330: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

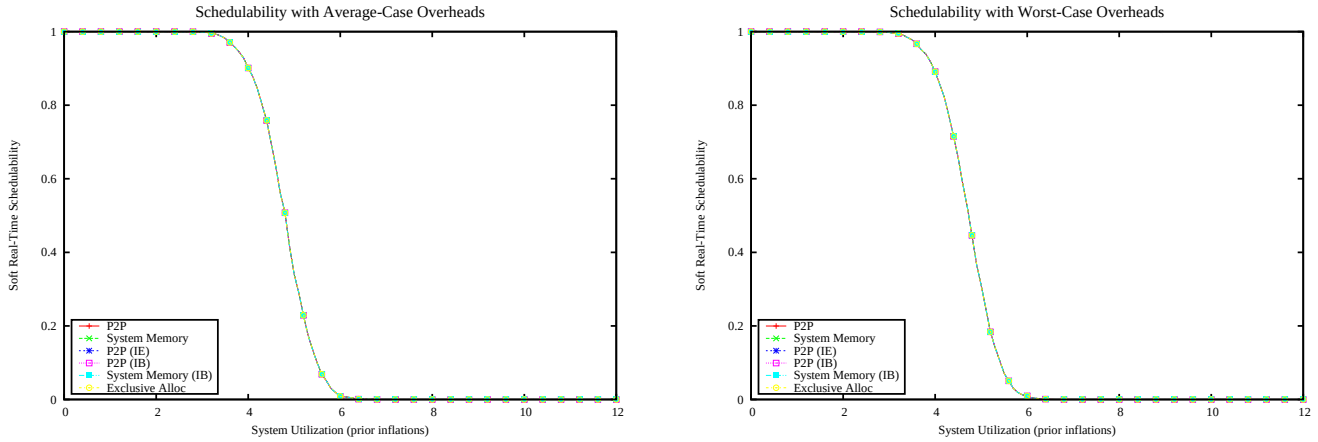

Figure 2331: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

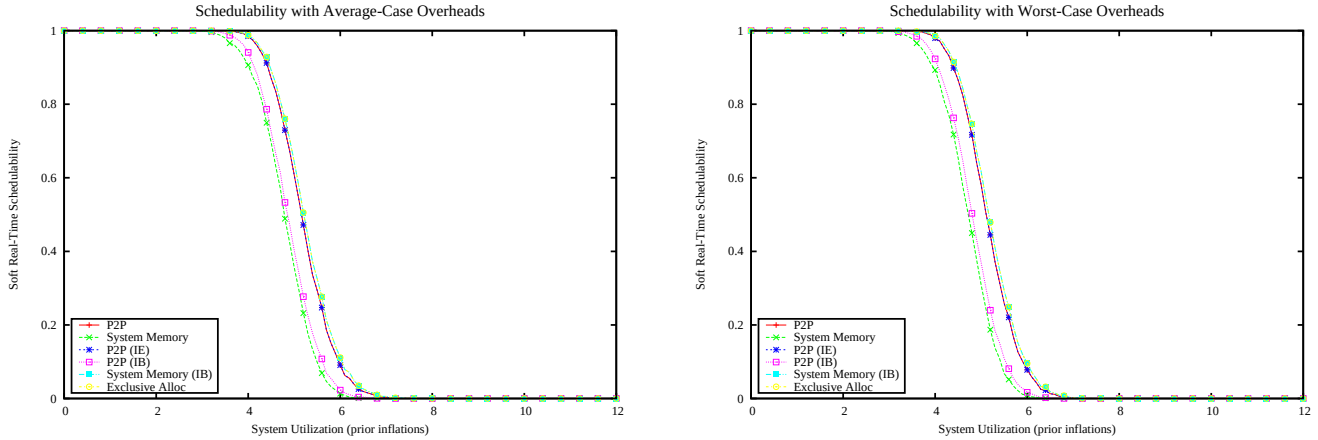

Figure 2332: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

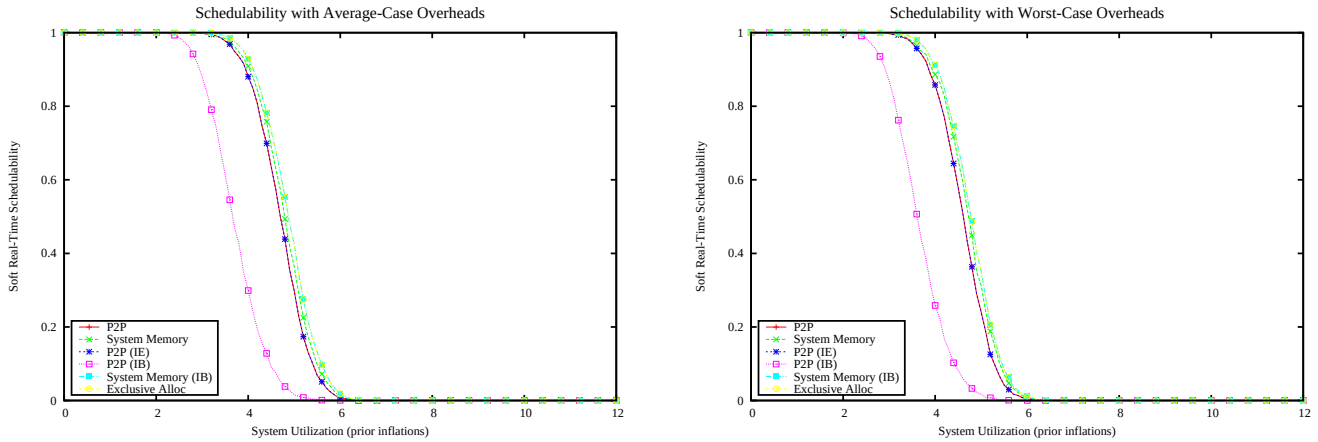

Figure 2333: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

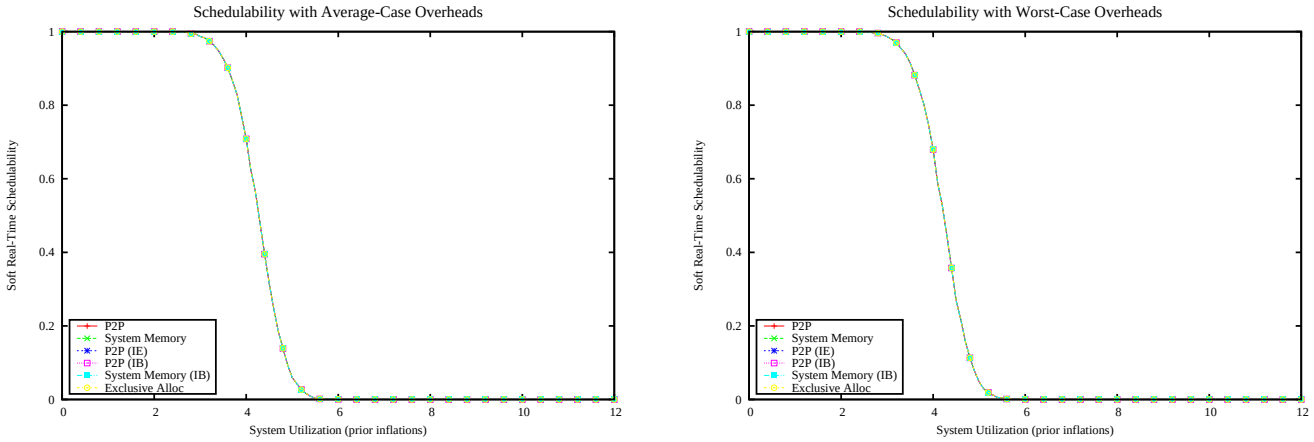

Figure 2334: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

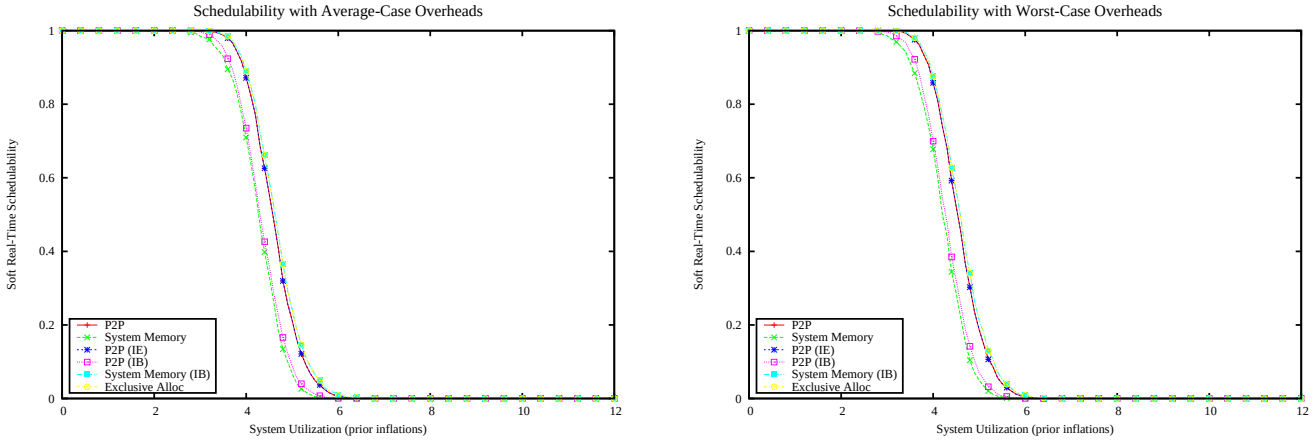

Figure 2335: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

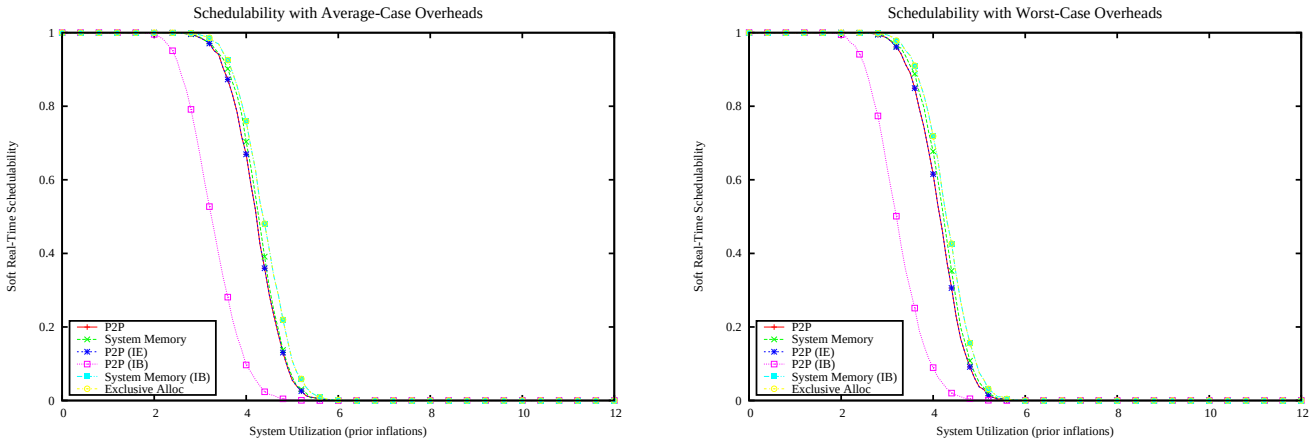

Figure 2336: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

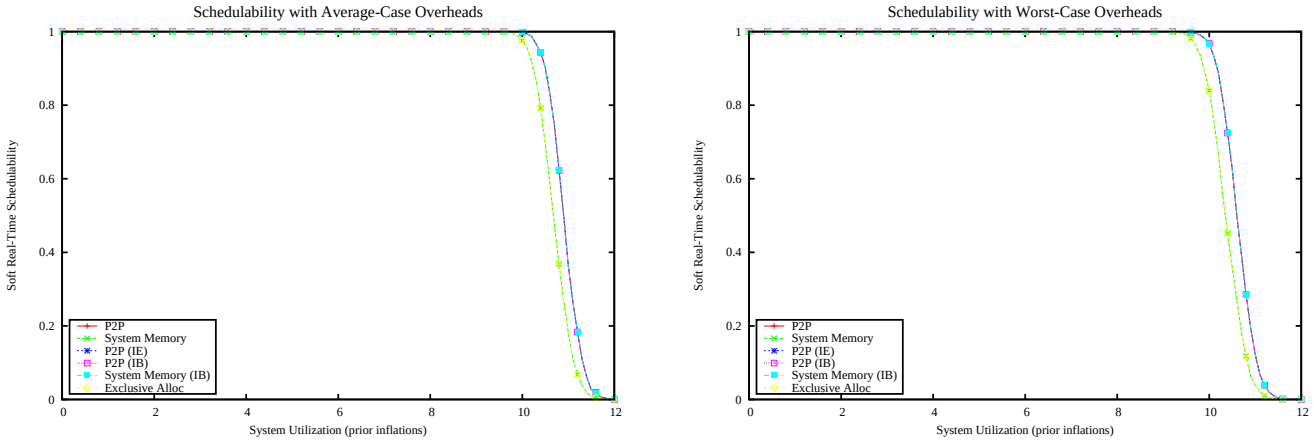

Figure 2337: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

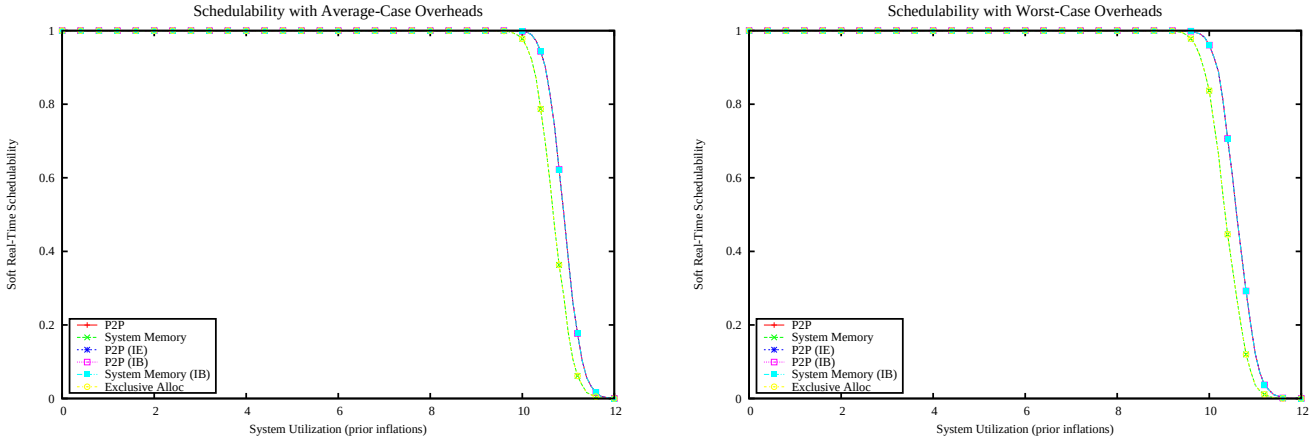

Figure 2338: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

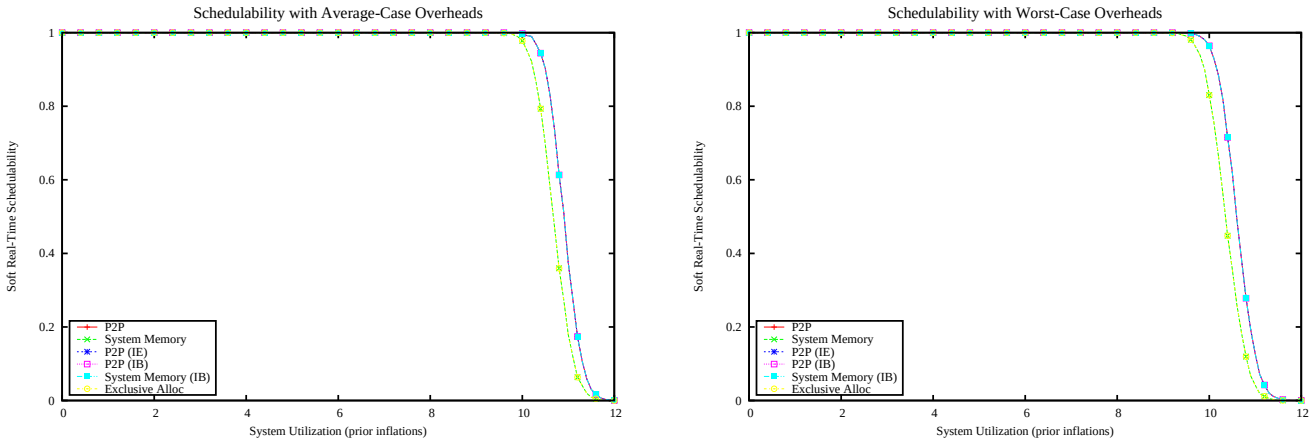

Figure 2339: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

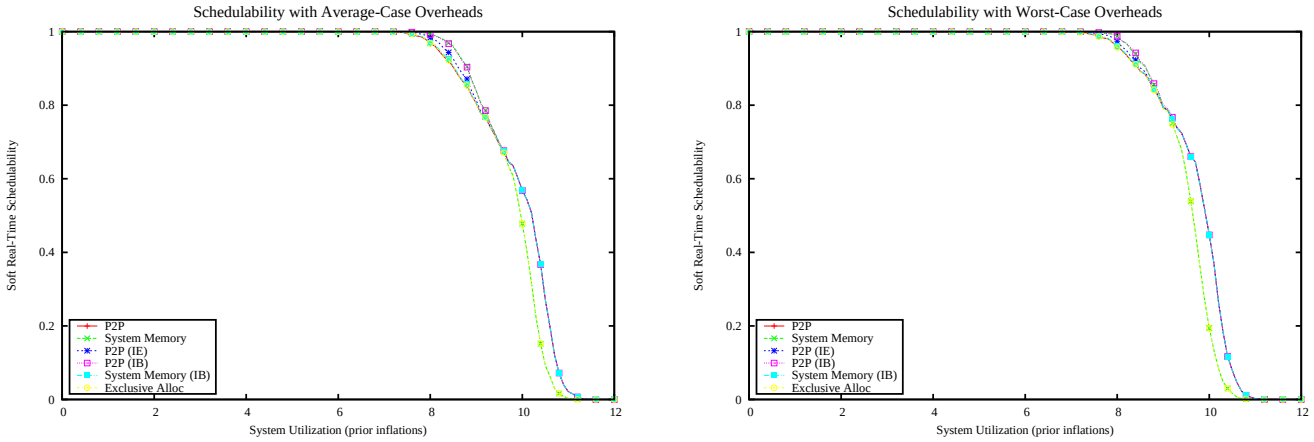

Figure 2340: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

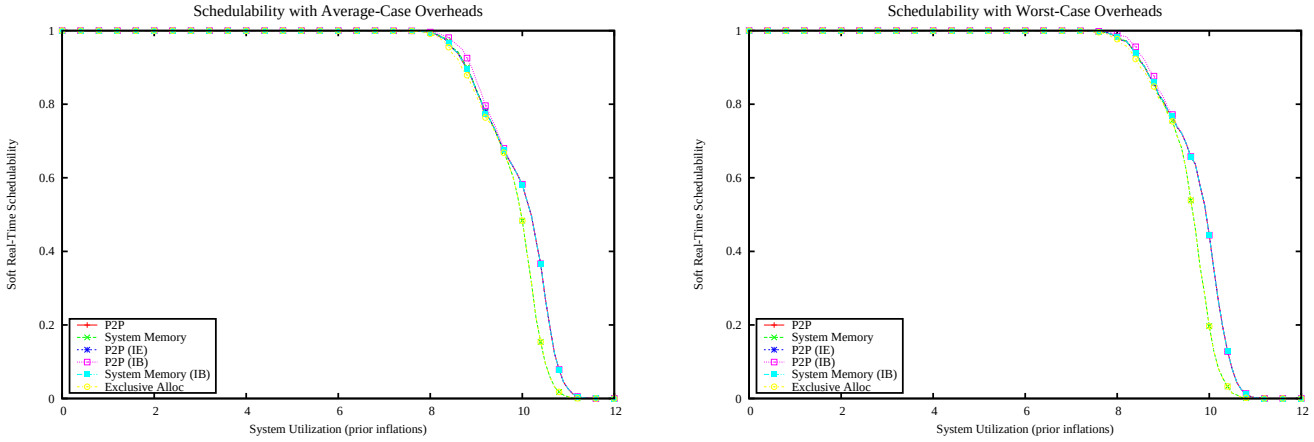

Figure 2341: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

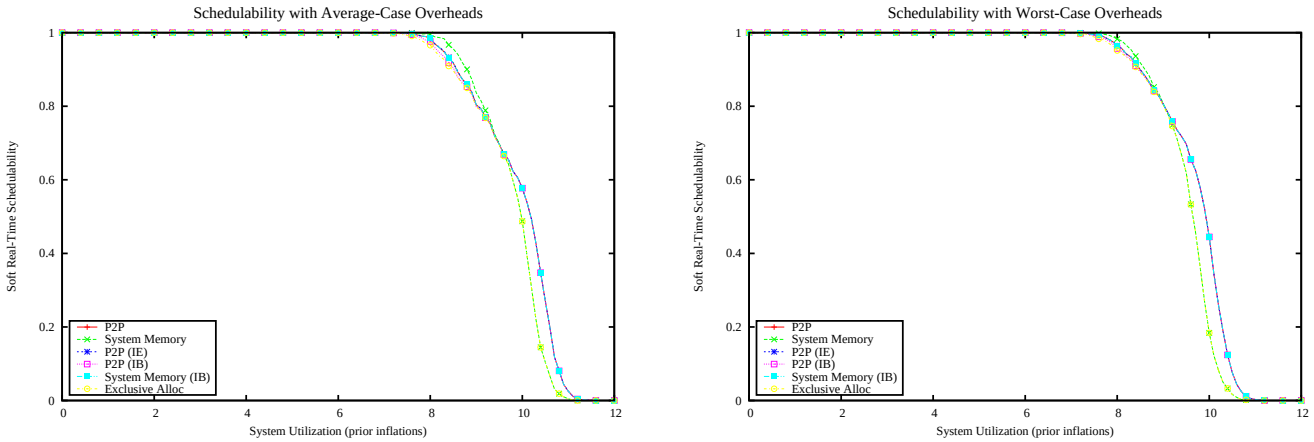

Figure 2342: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

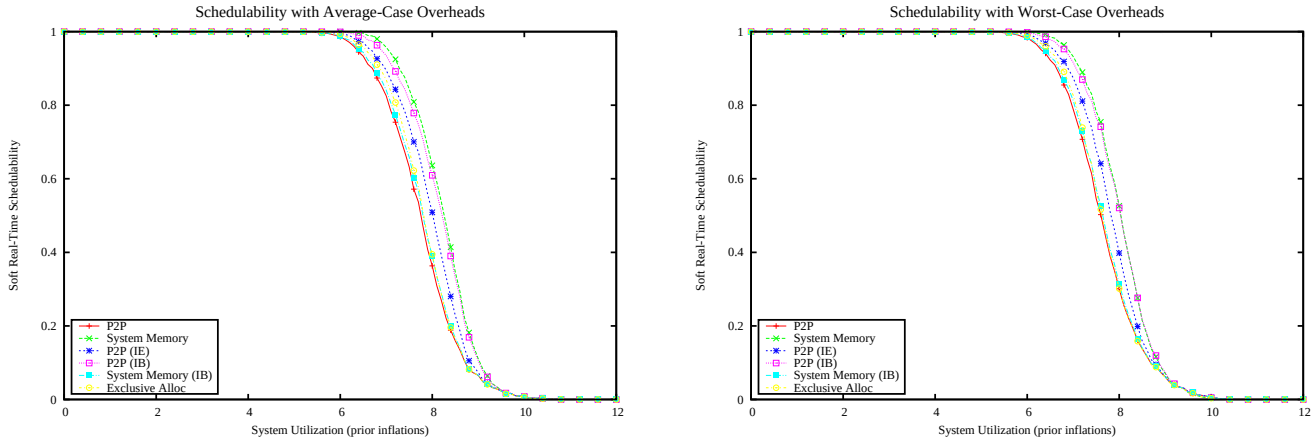

Figure 2343: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

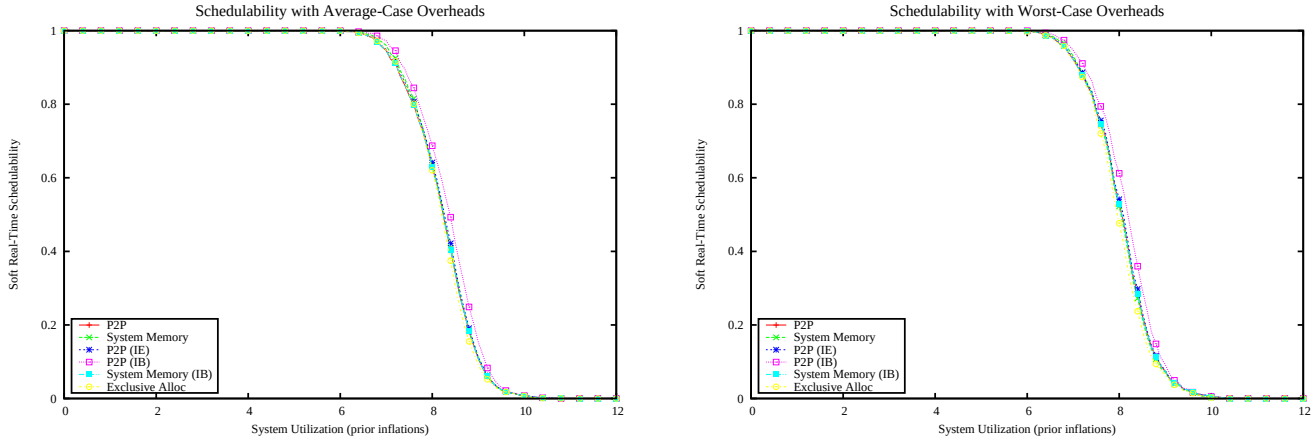

Figure 2344: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

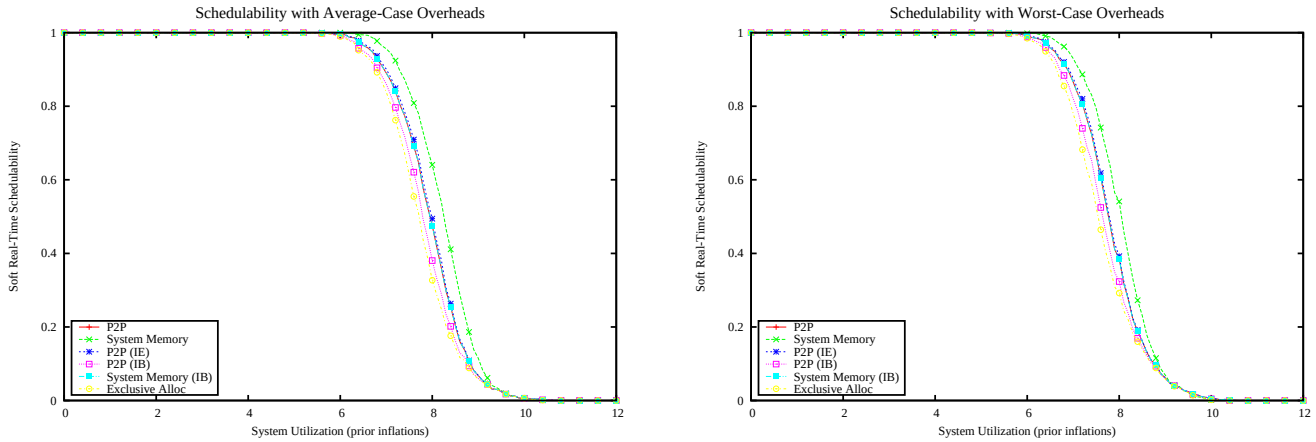

Figure 2345: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

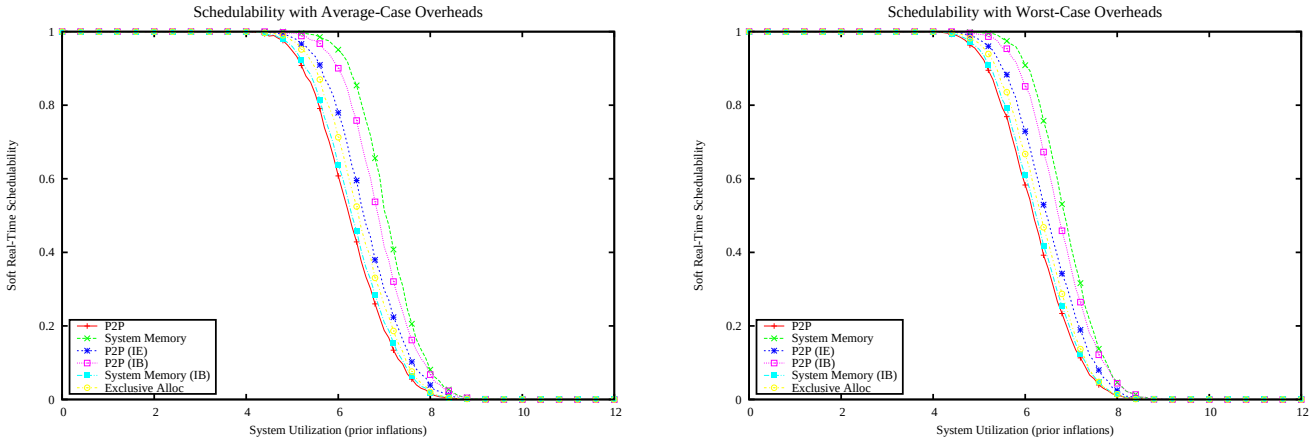

Figure 2346: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

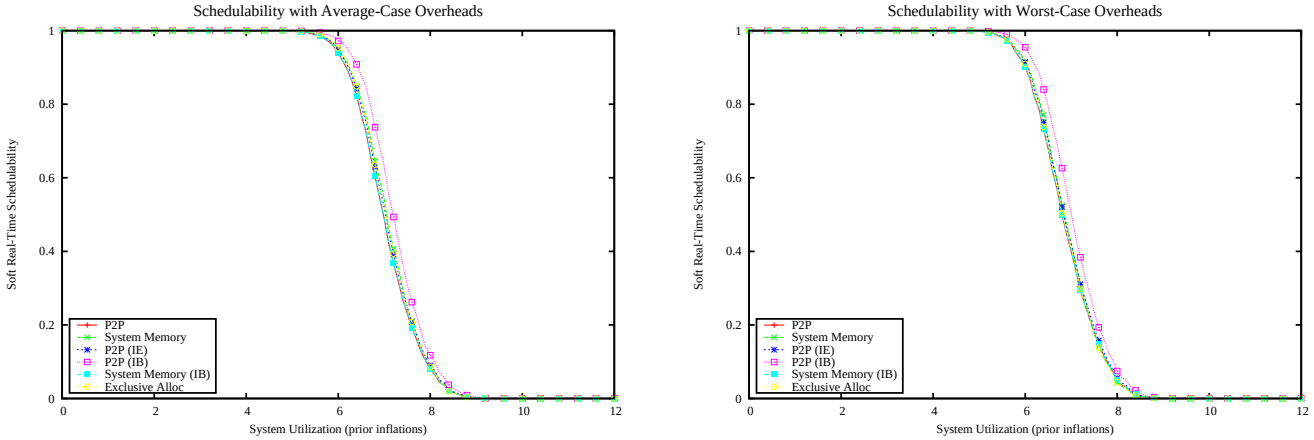

Figure 2347: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

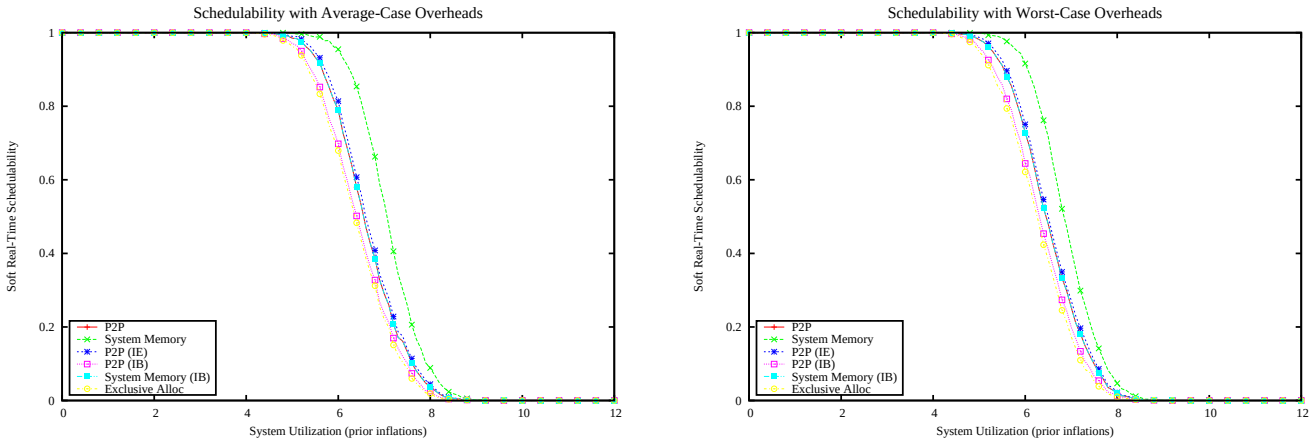

Figure 2348: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

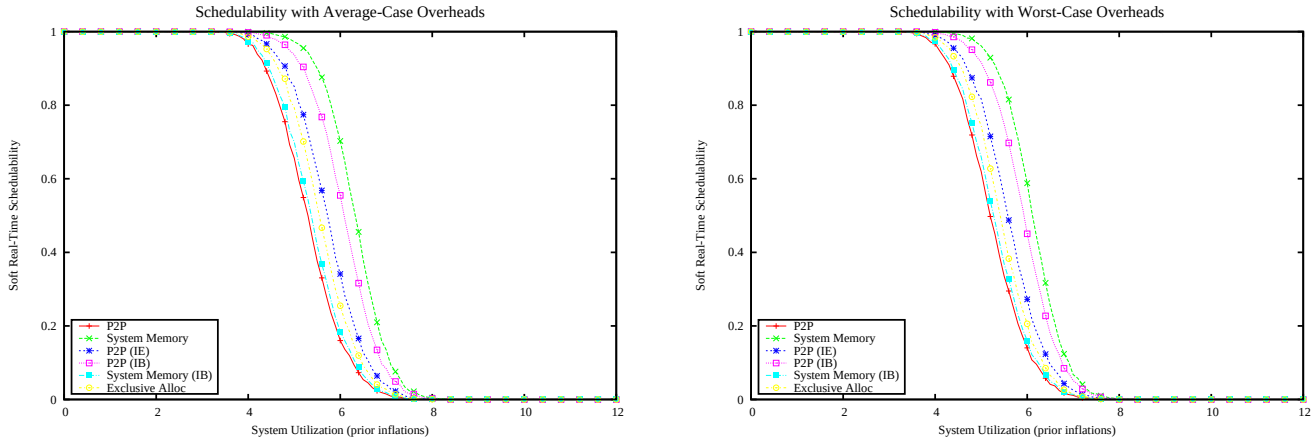

Figure 2349: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

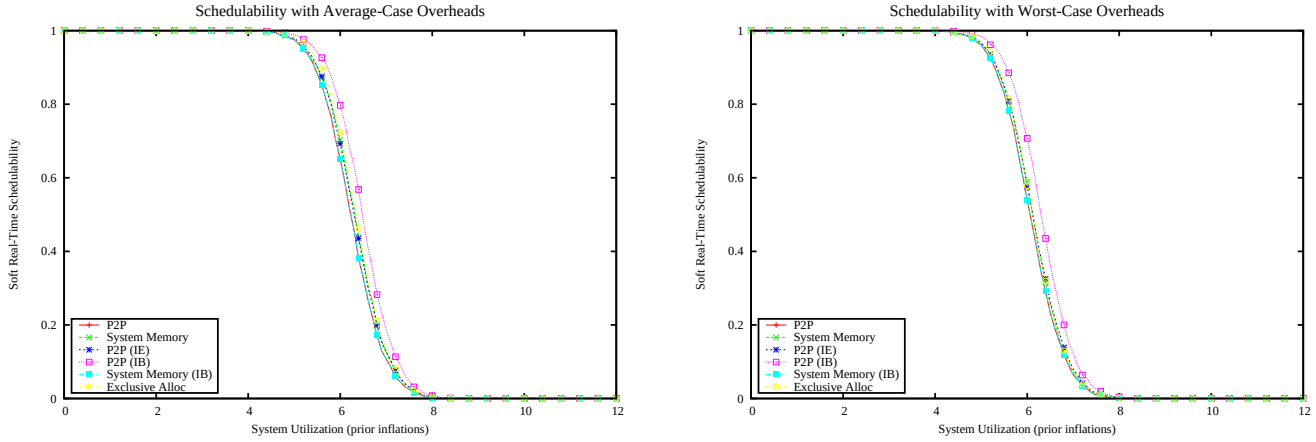

Figure 2350: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

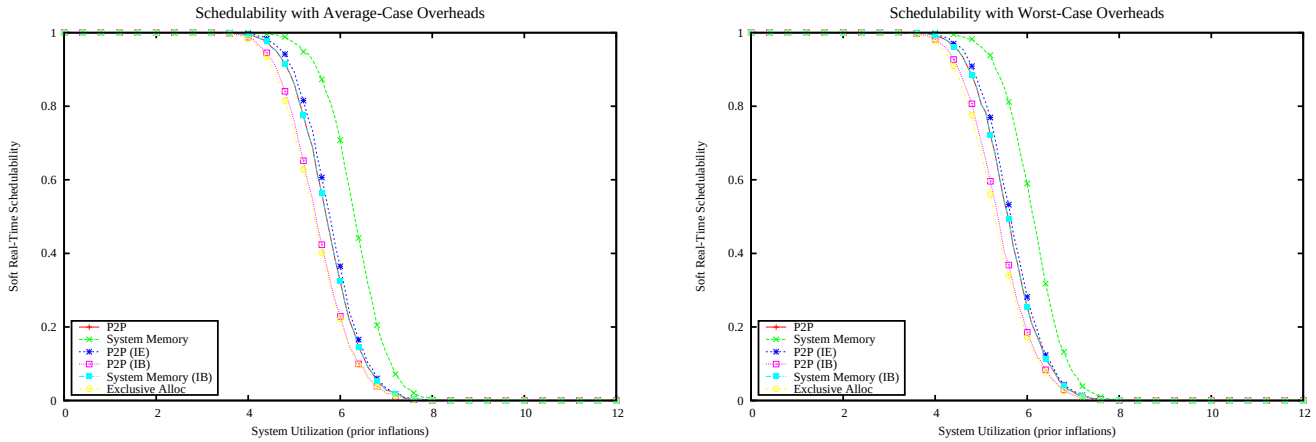

Figure 2351: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

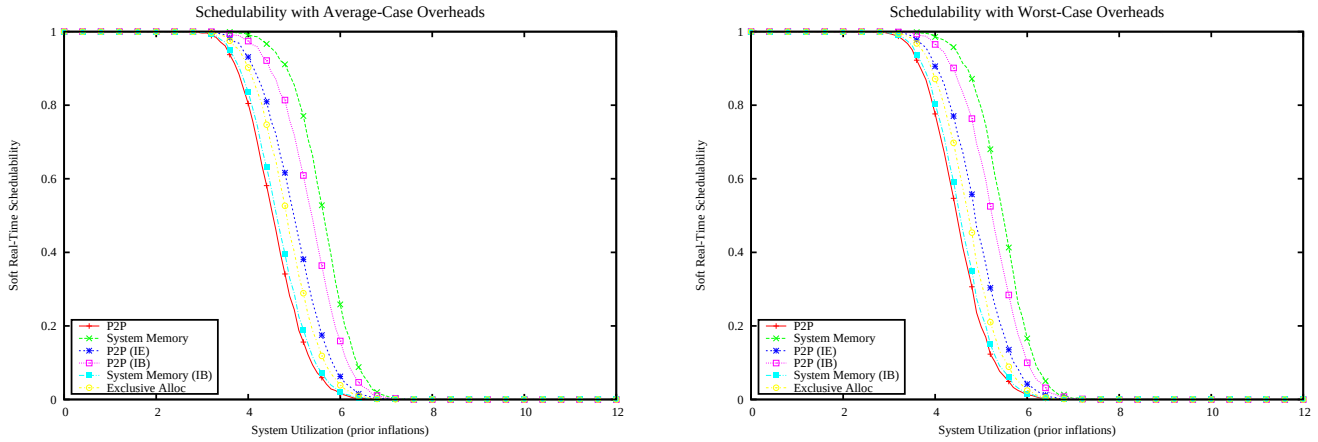

Figure 2352: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

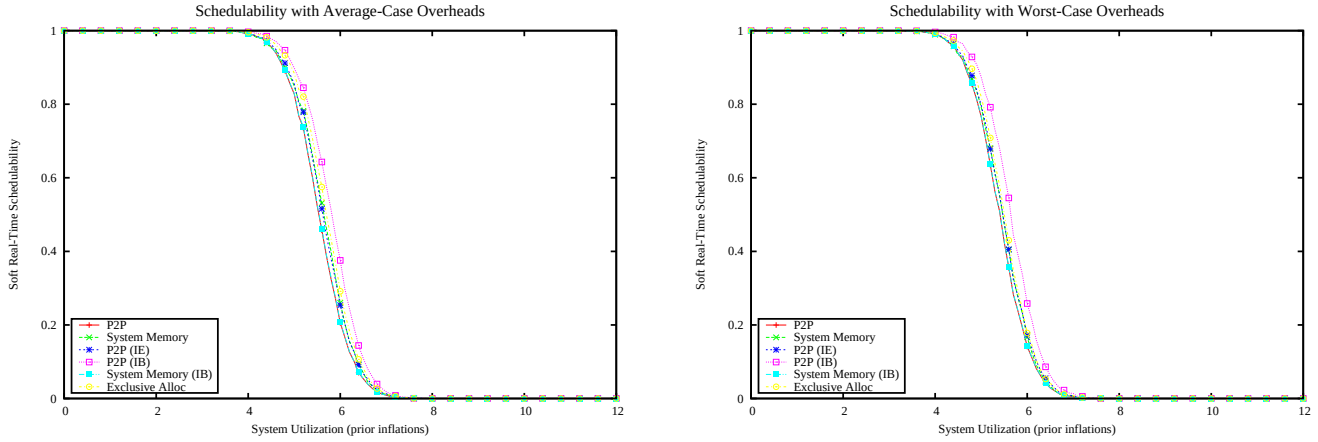

Figure 2353: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

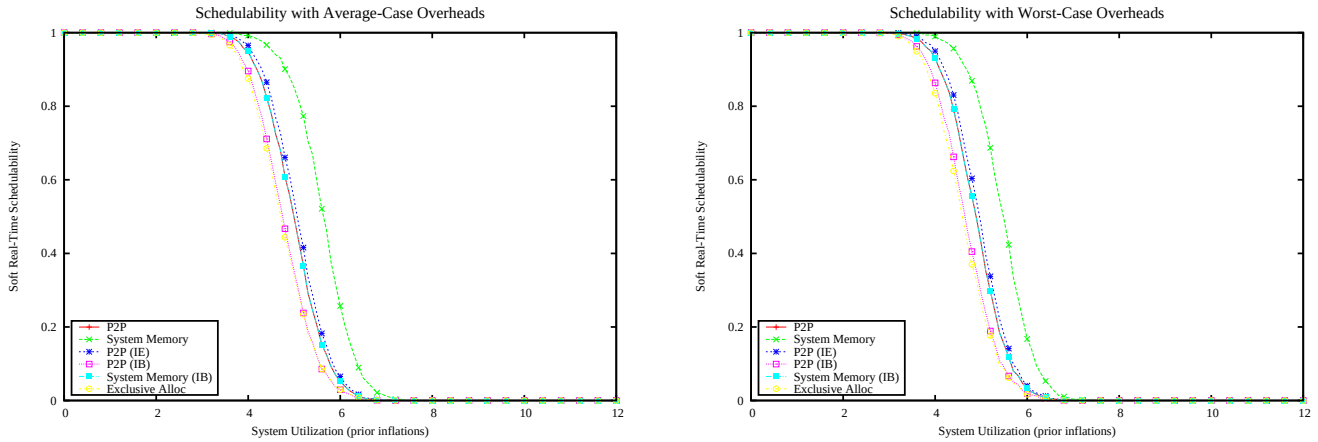

Figure 2354: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

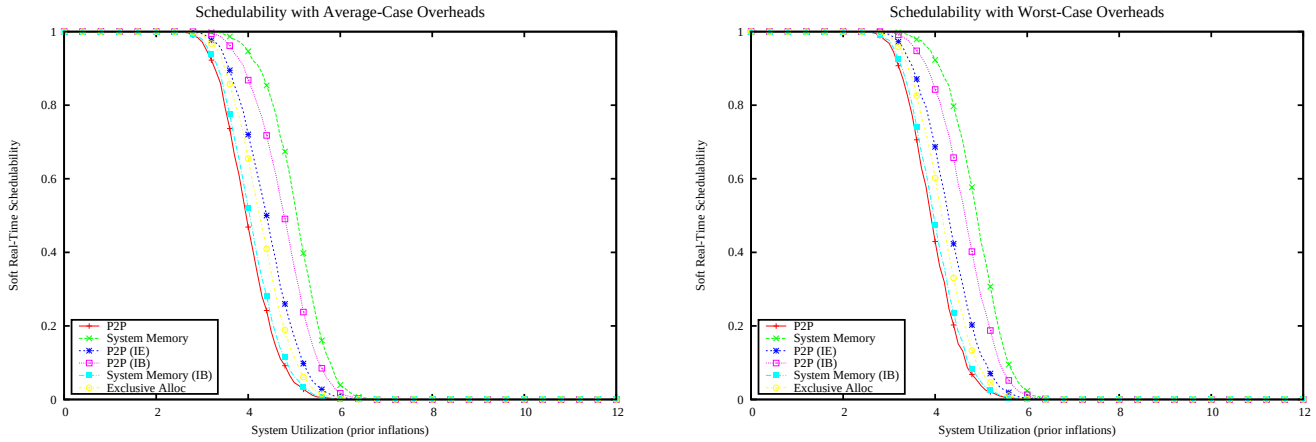

Figure 2355: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

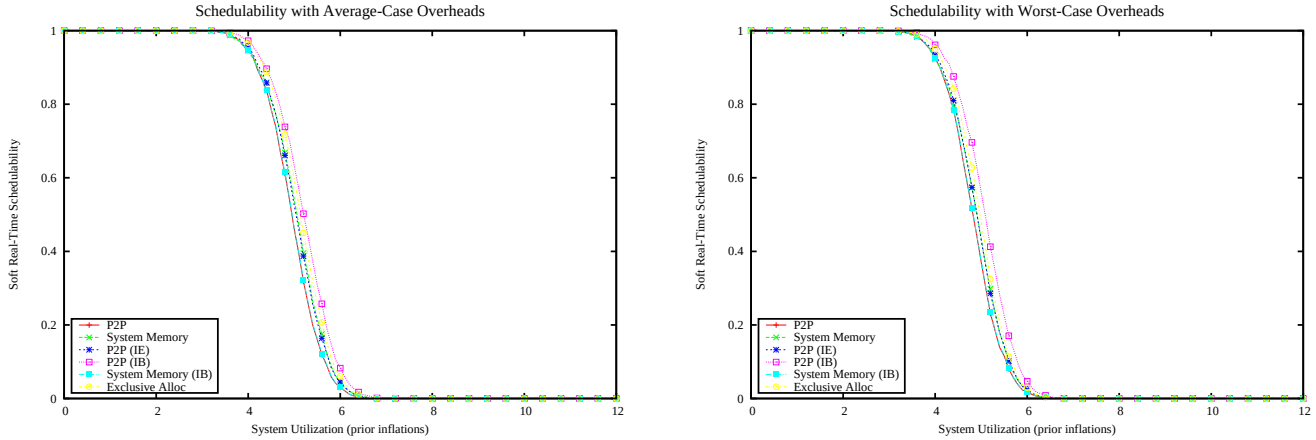

Figure 2356: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

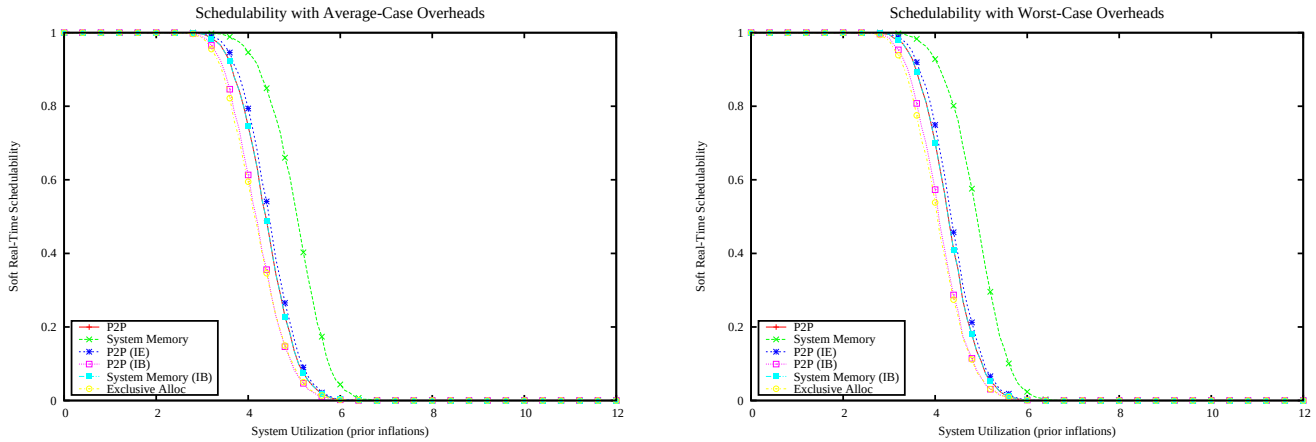

Figure 2357: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

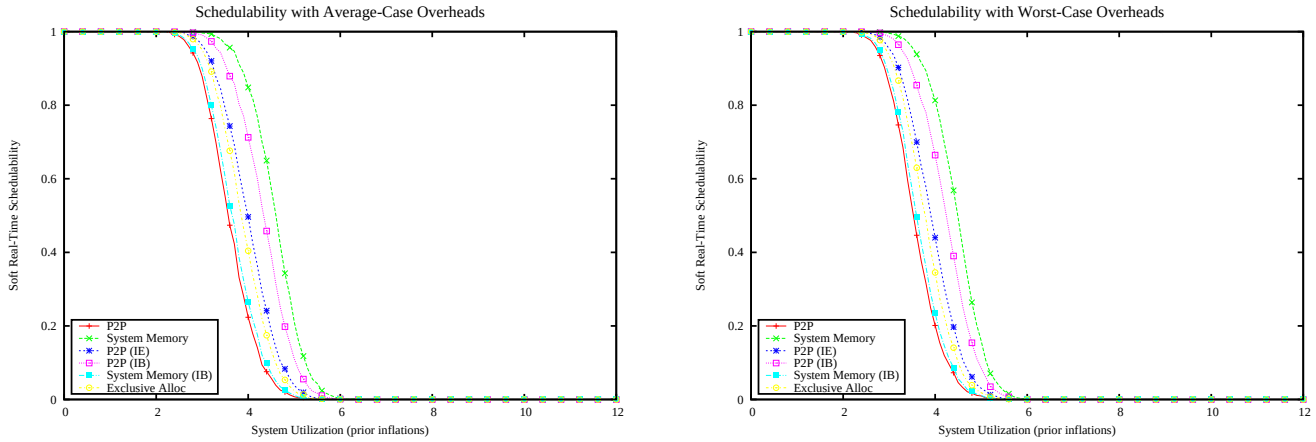

Figure 2358: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

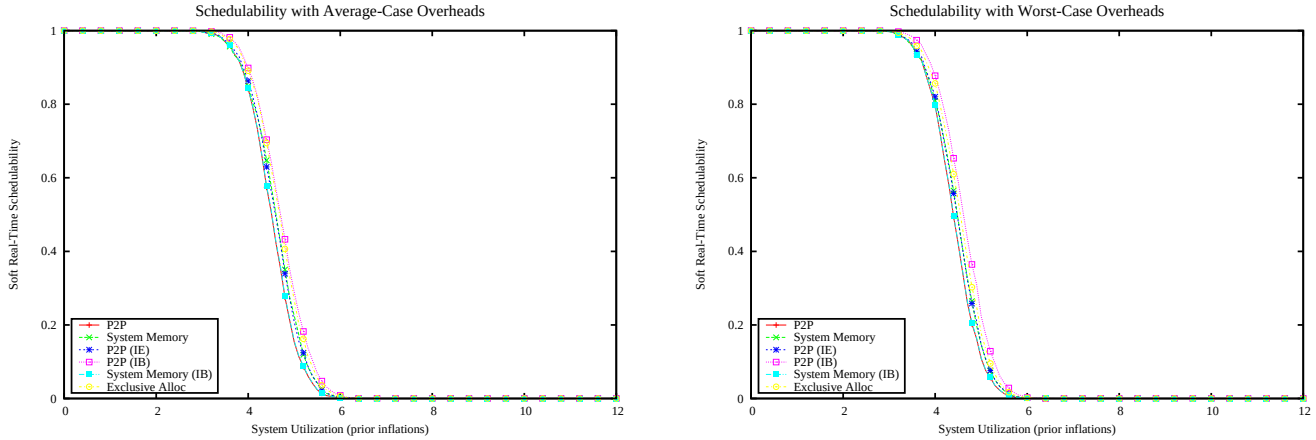

Figure 2359: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

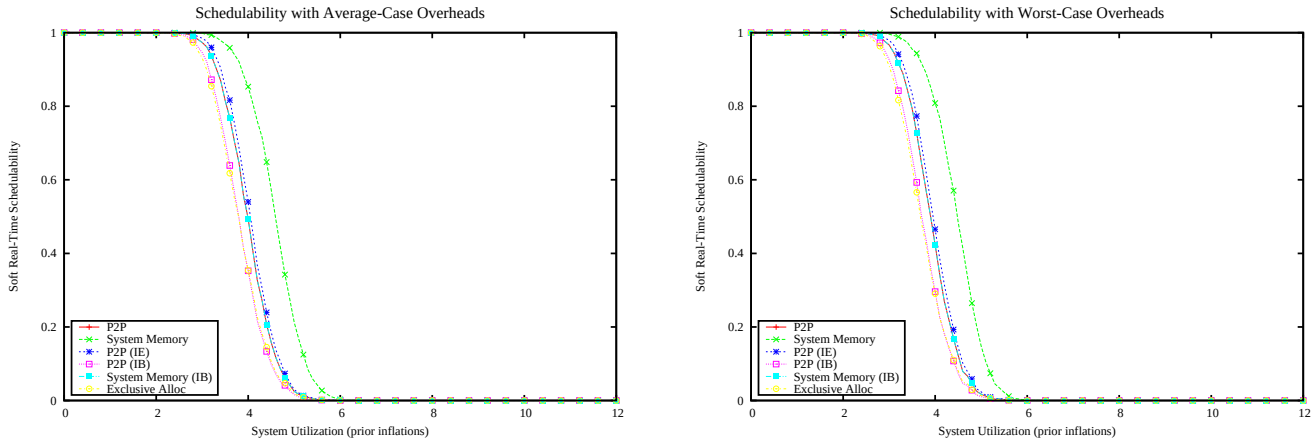

Figure 2360: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

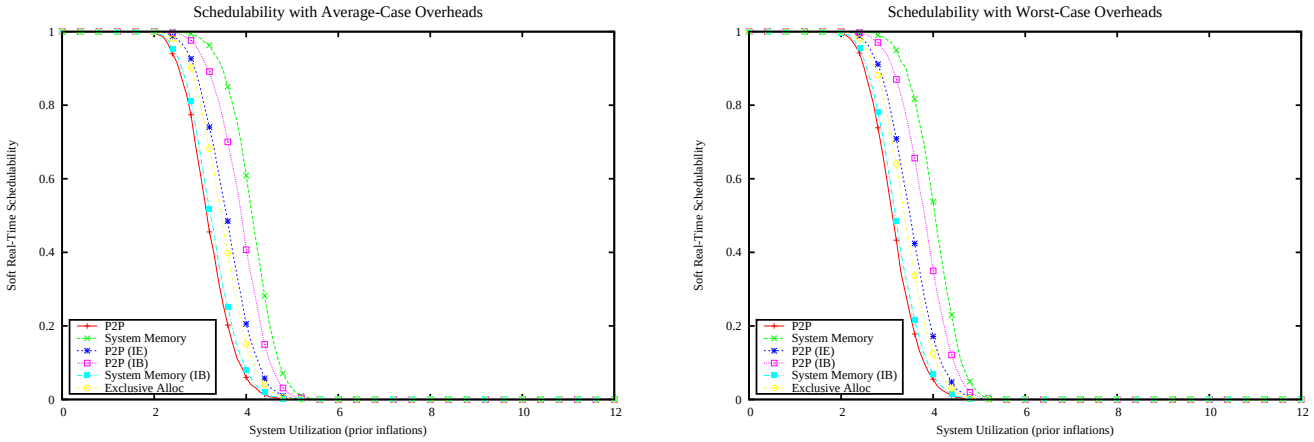

Figure 2361: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

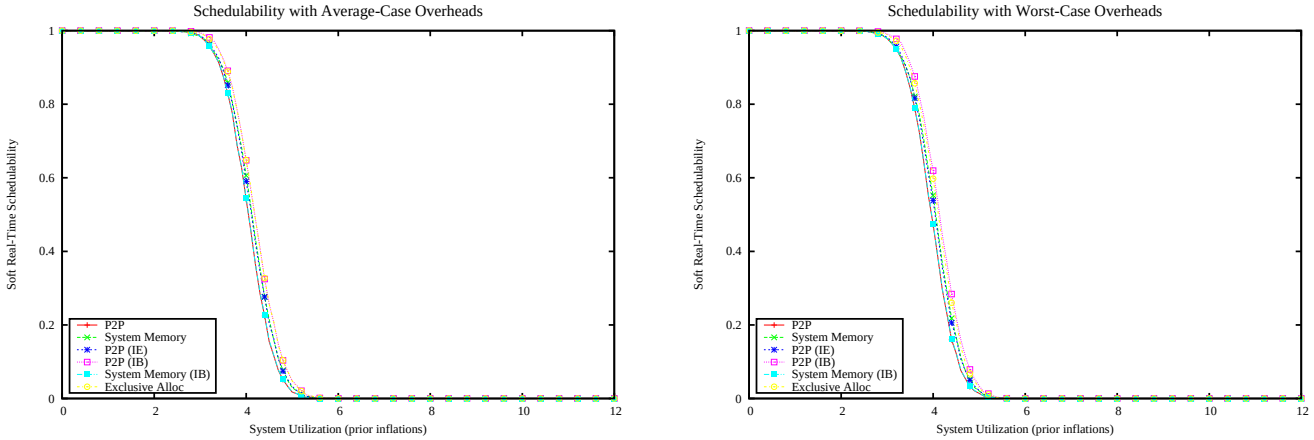

Figure 2362: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

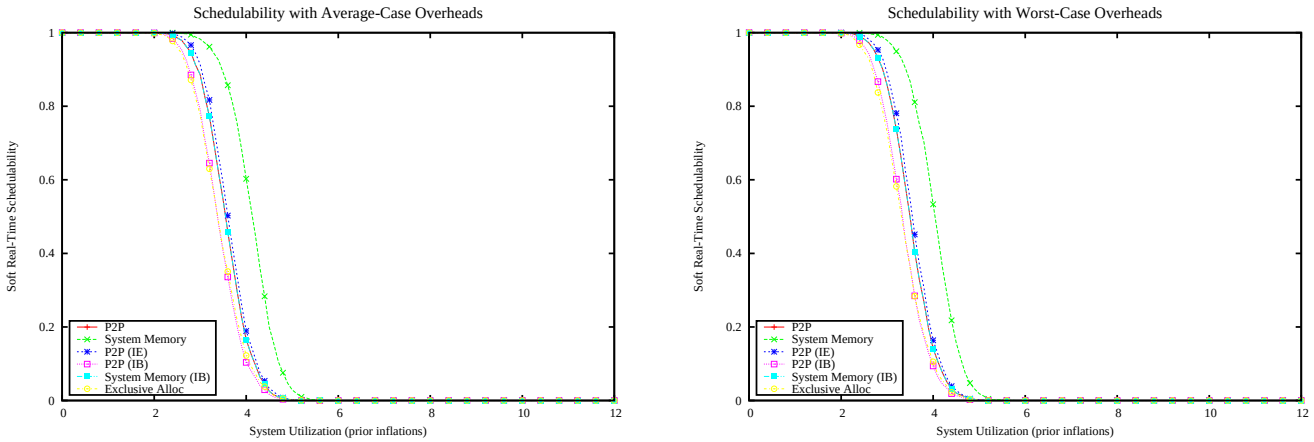

Figure 2363: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

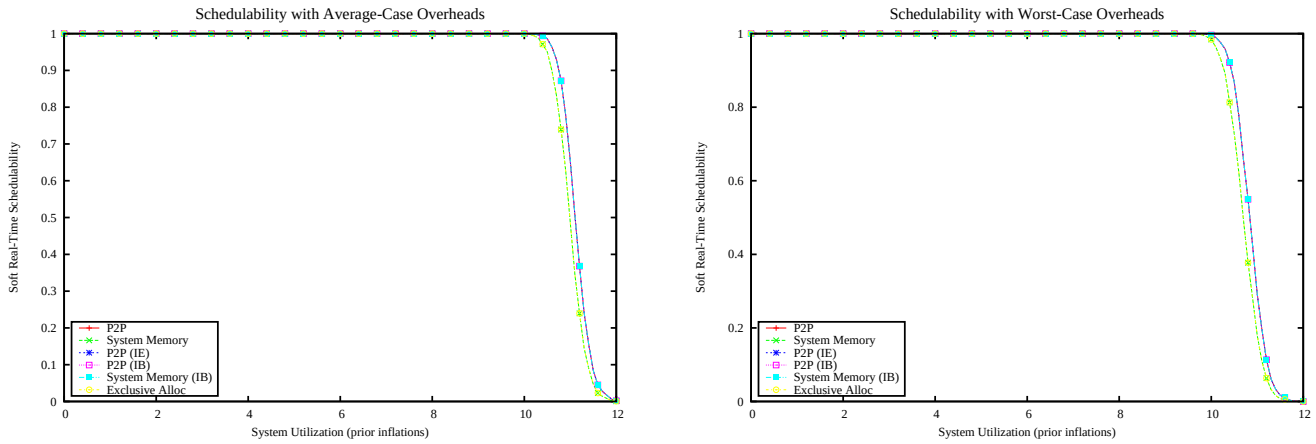

Figure 2364: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

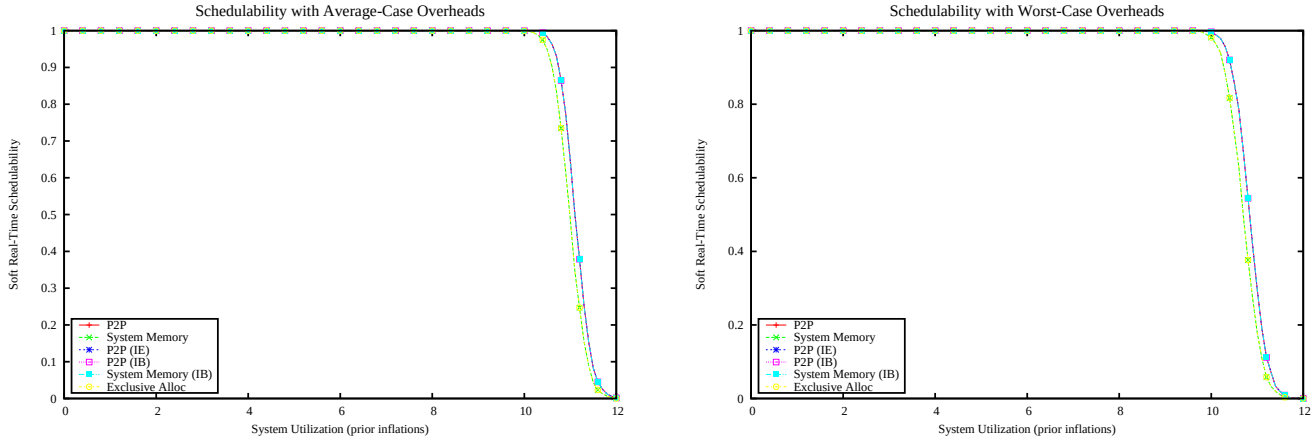

Figure 2365: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

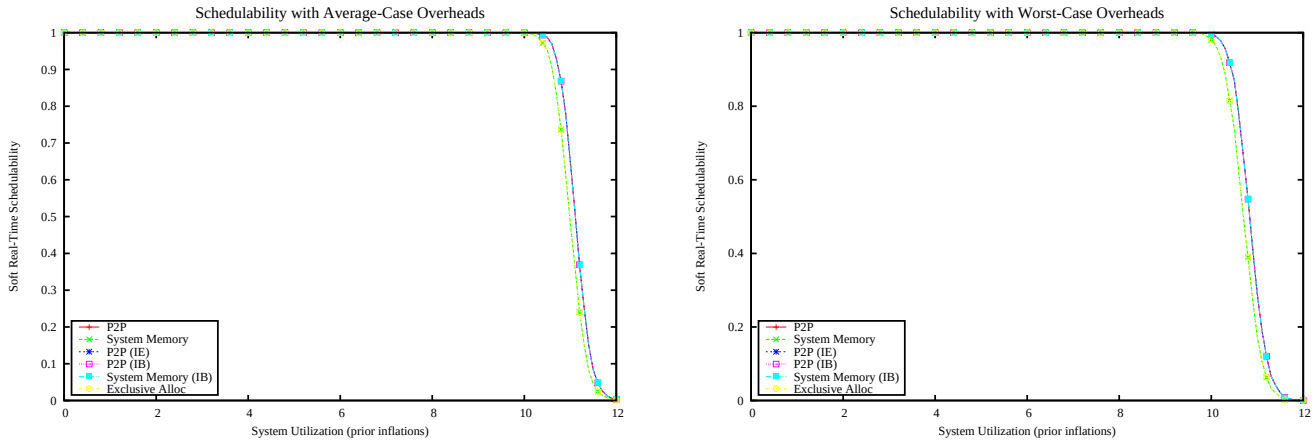

Figure 2366: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

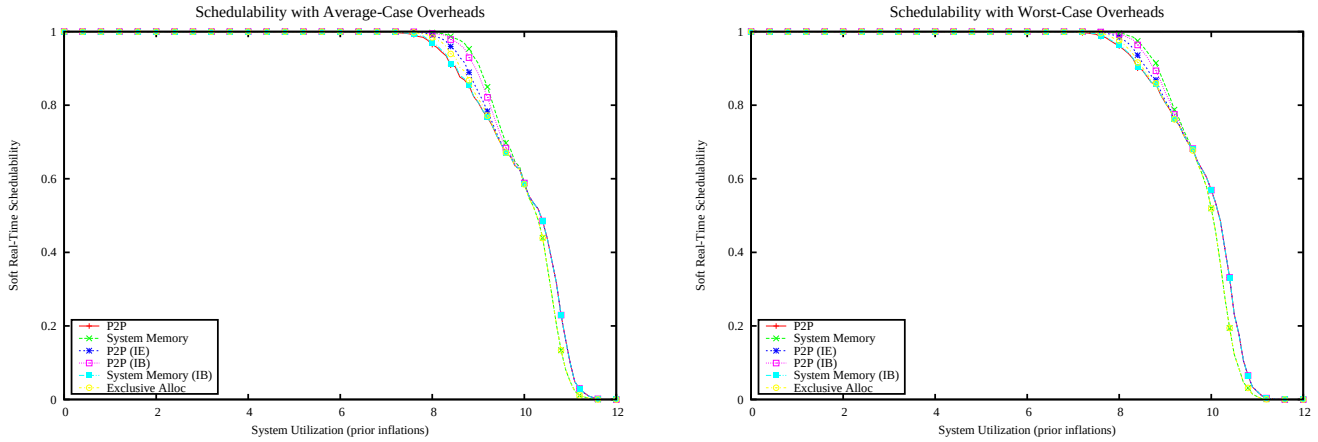

Figure 2367: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

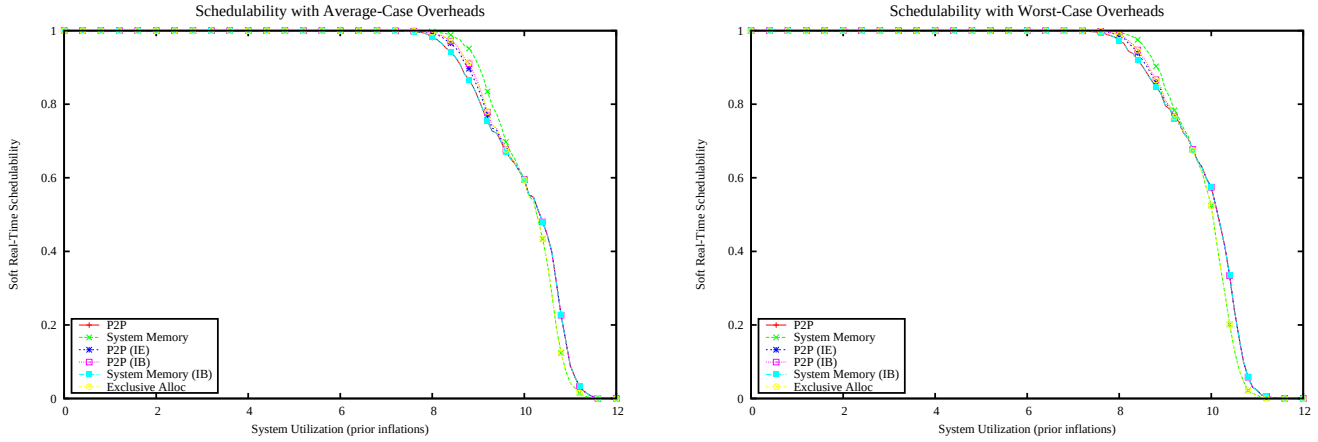

Figure 2368: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

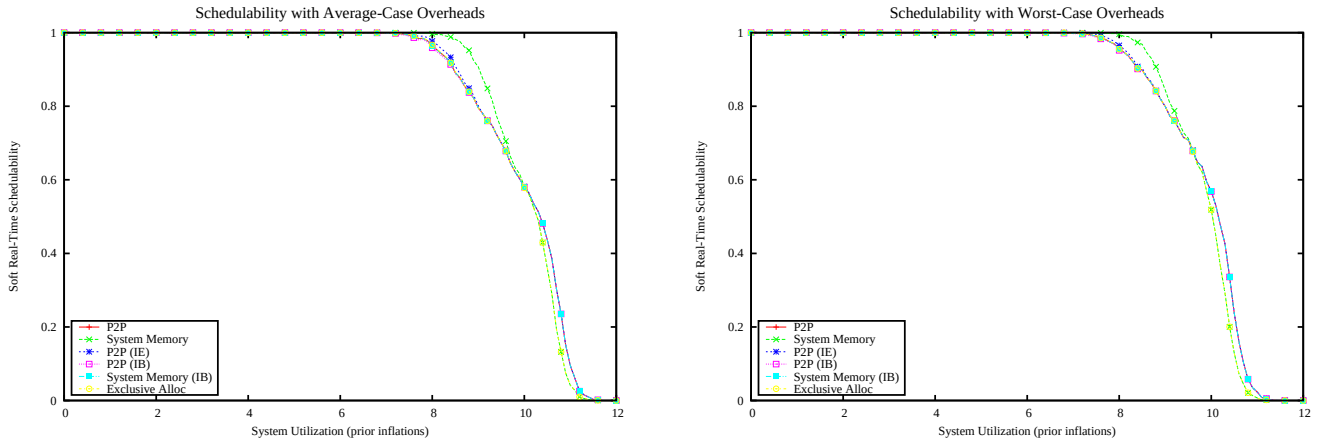

Figure 2369: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

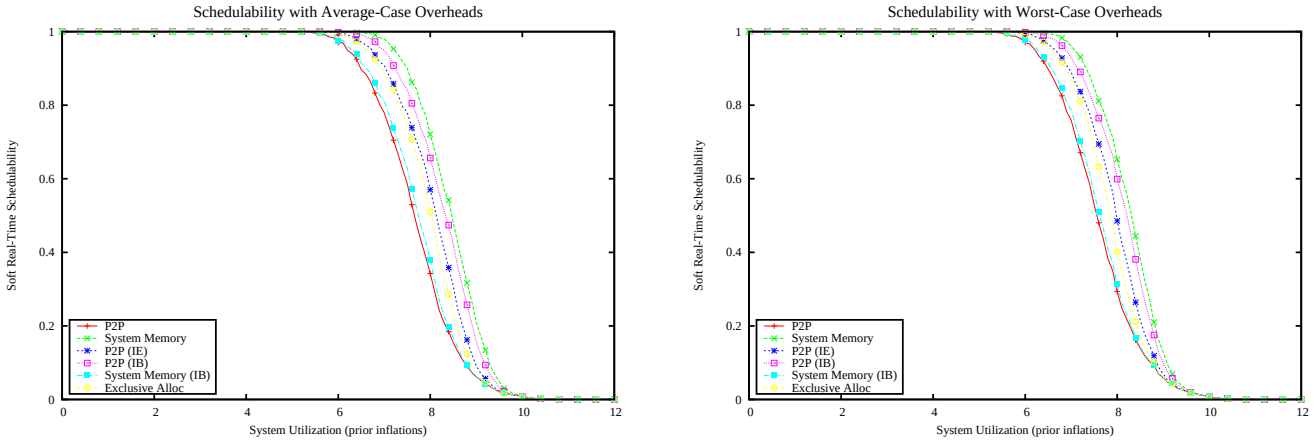

Figure 2370: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

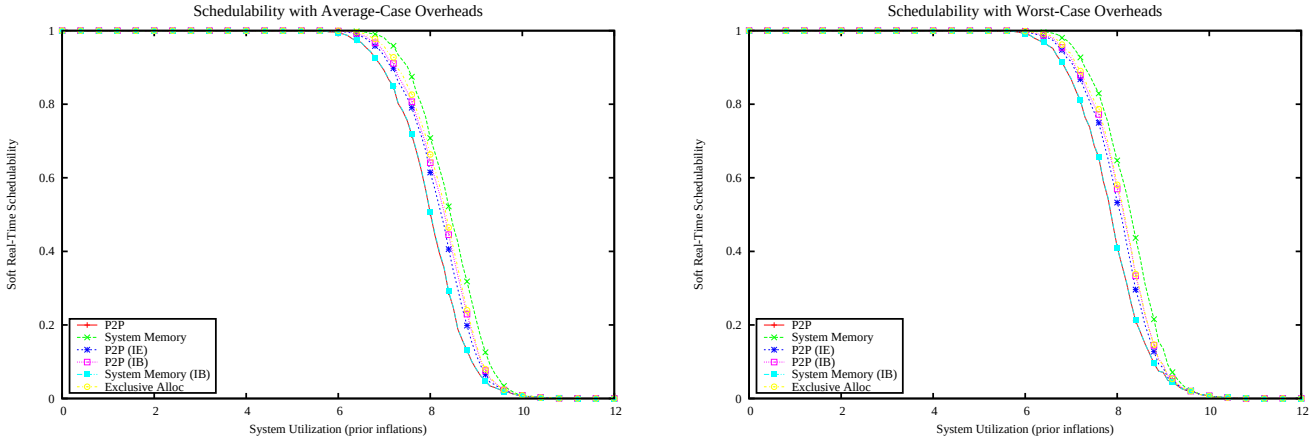

Figure 2371: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

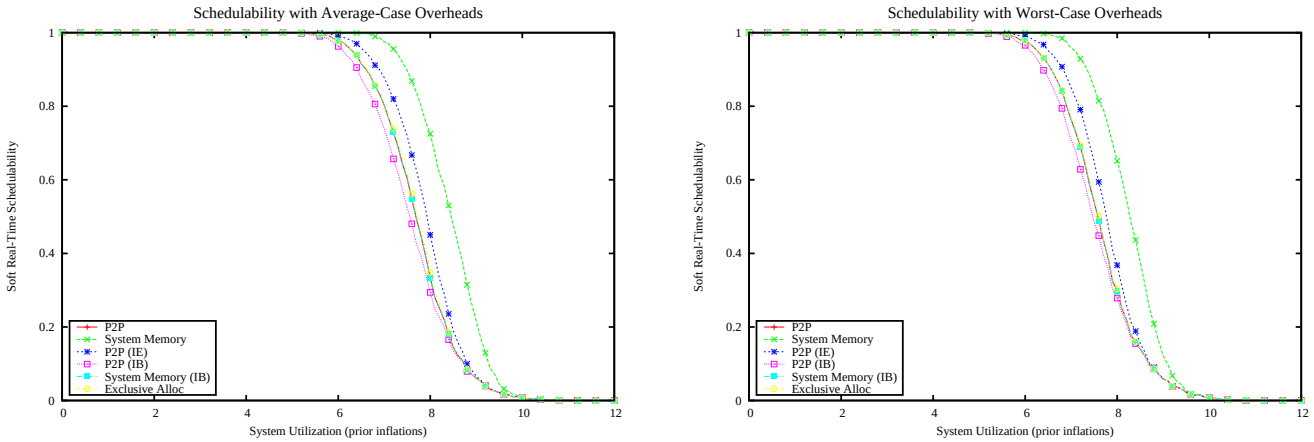

Figure 2372: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

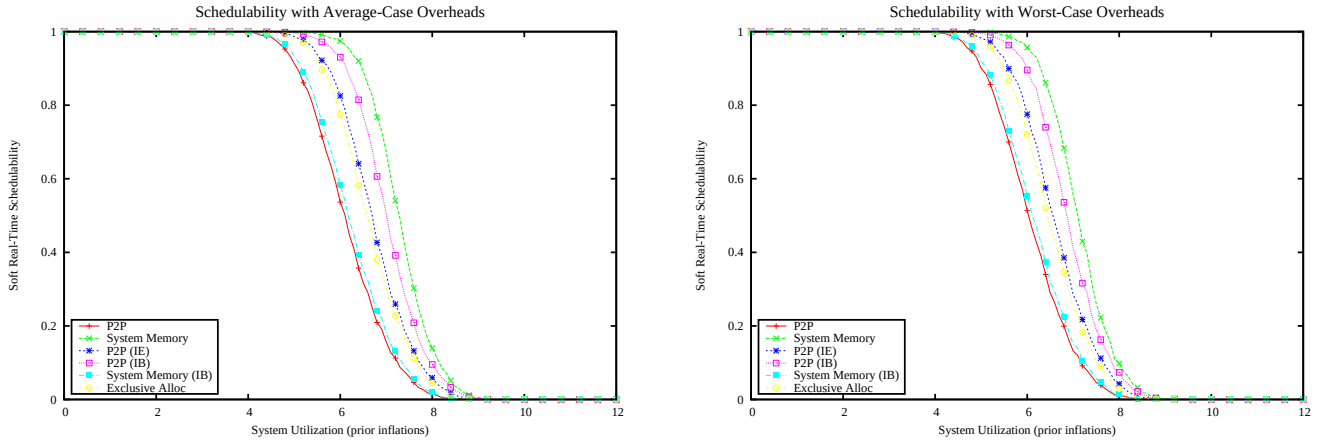

Figure 2373: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

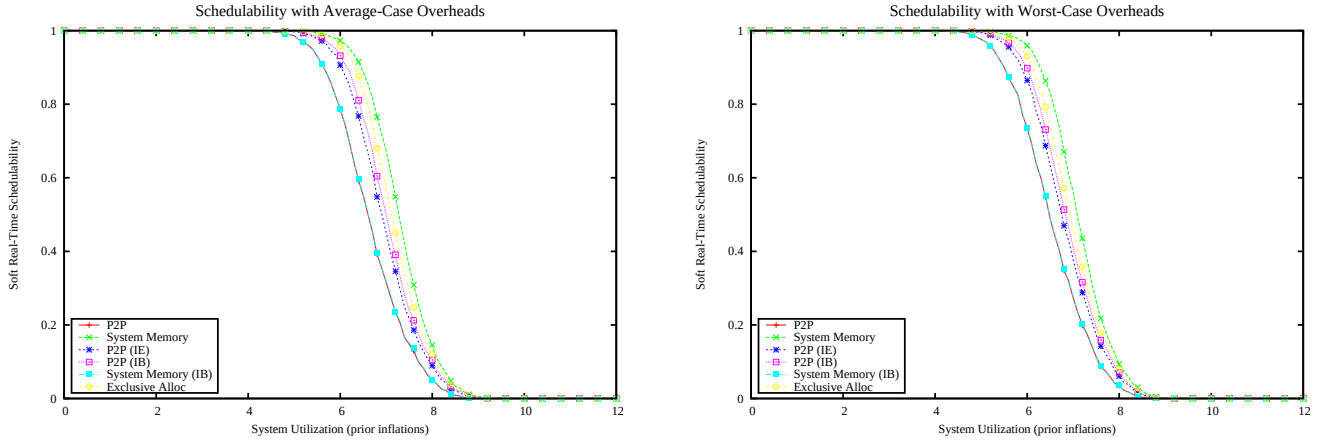

Figure 2374: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

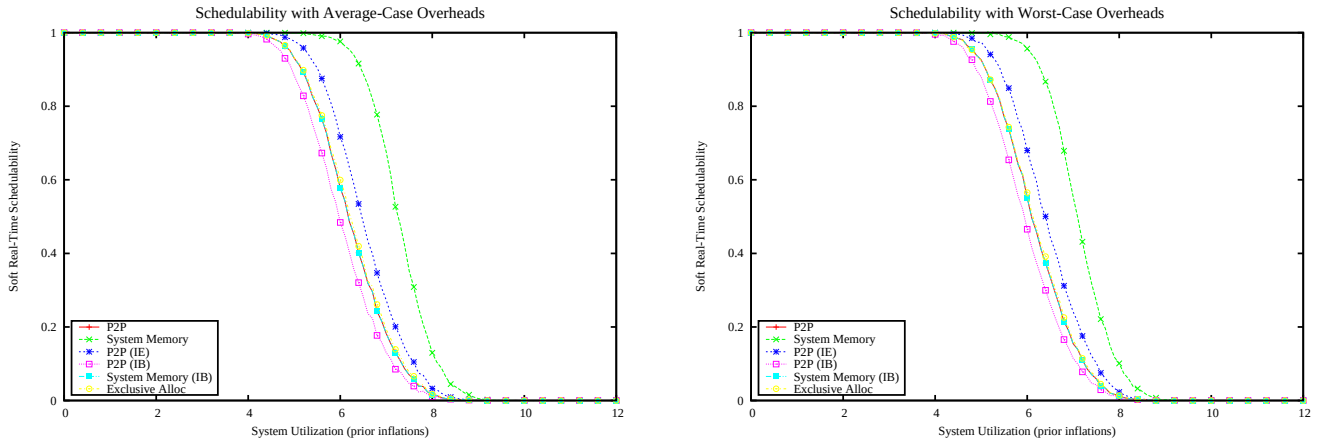

Figure 2375: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

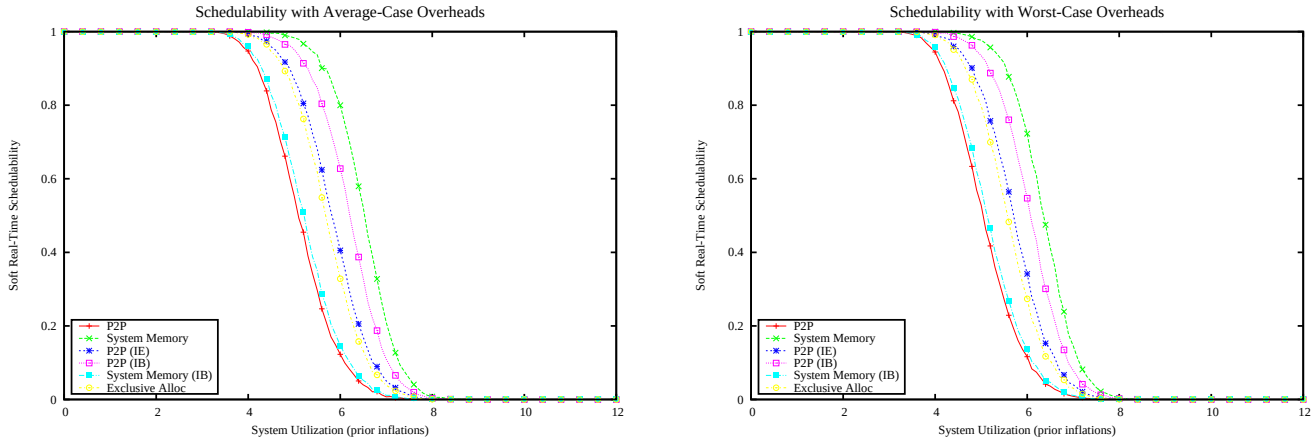

Figure 2376: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

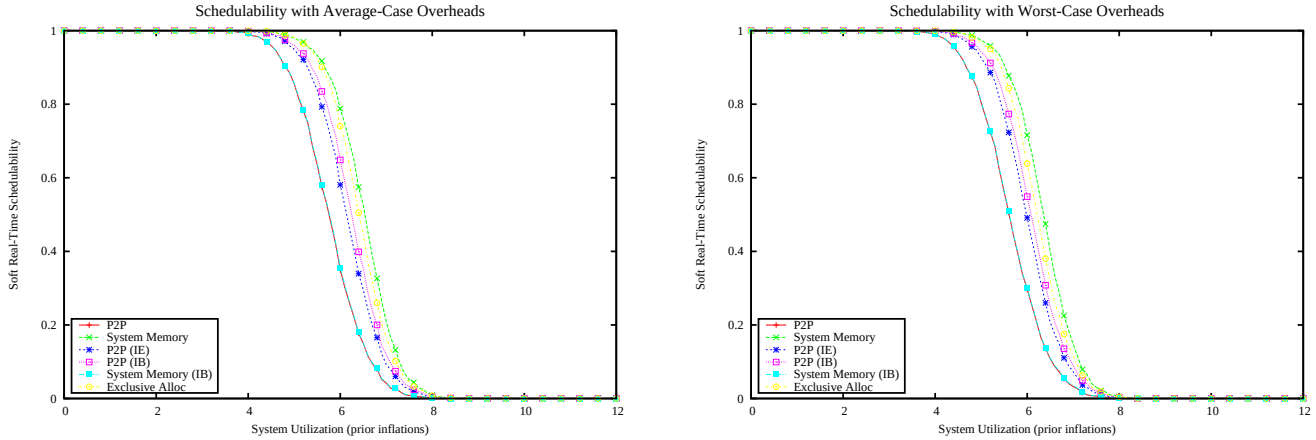

Figure 2377: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

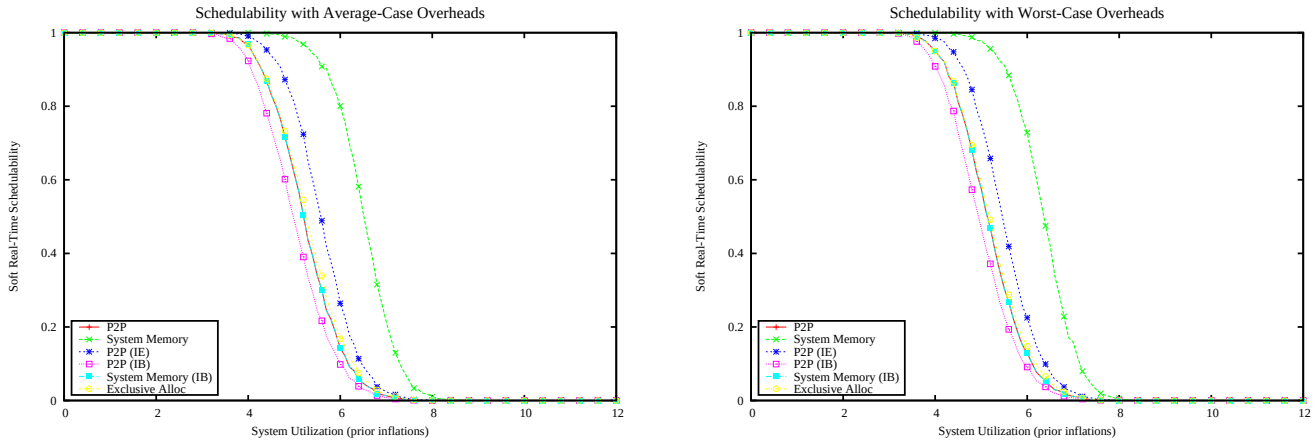

Figure 2378: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

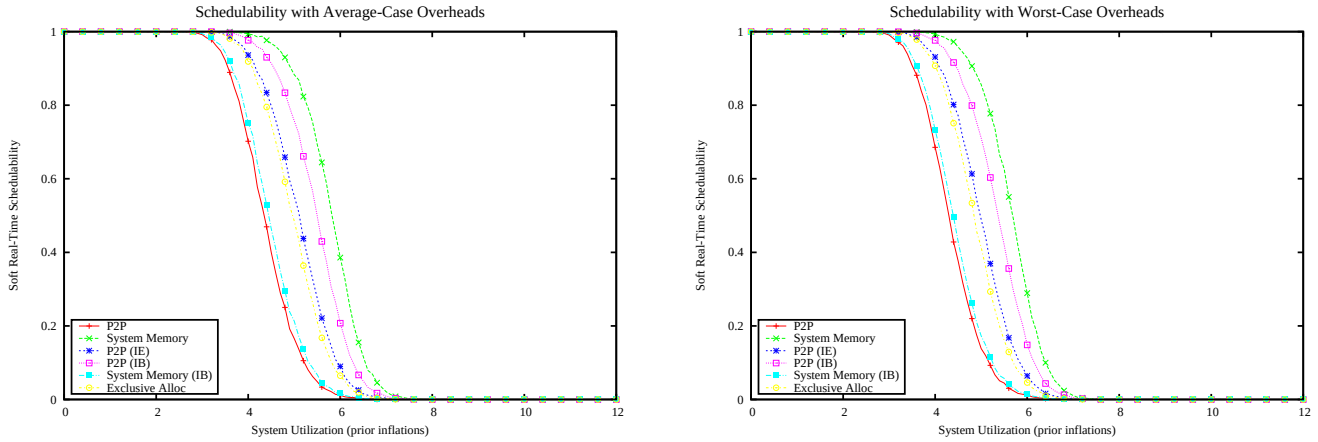

Figure 2379: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

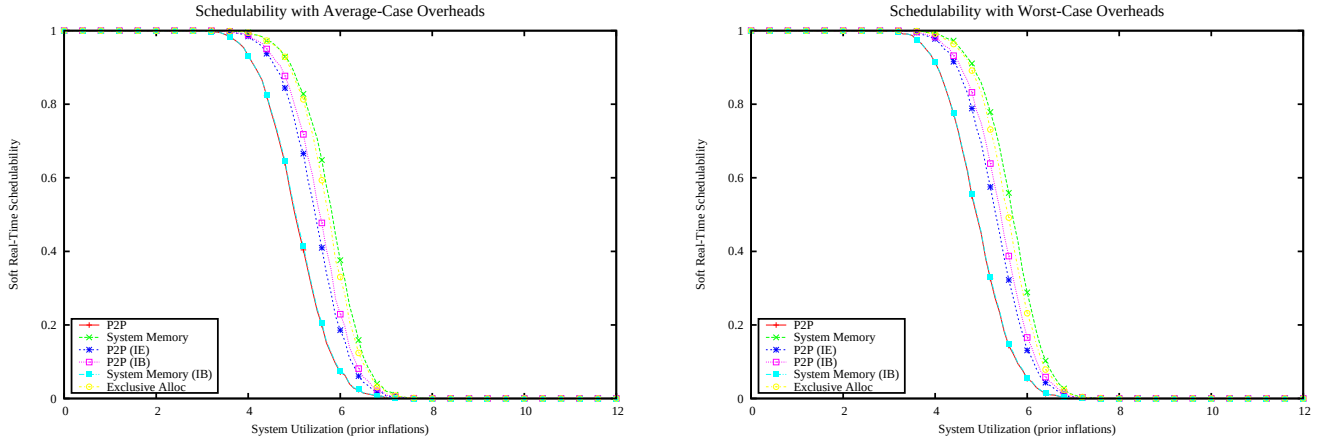

Figure 2380: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

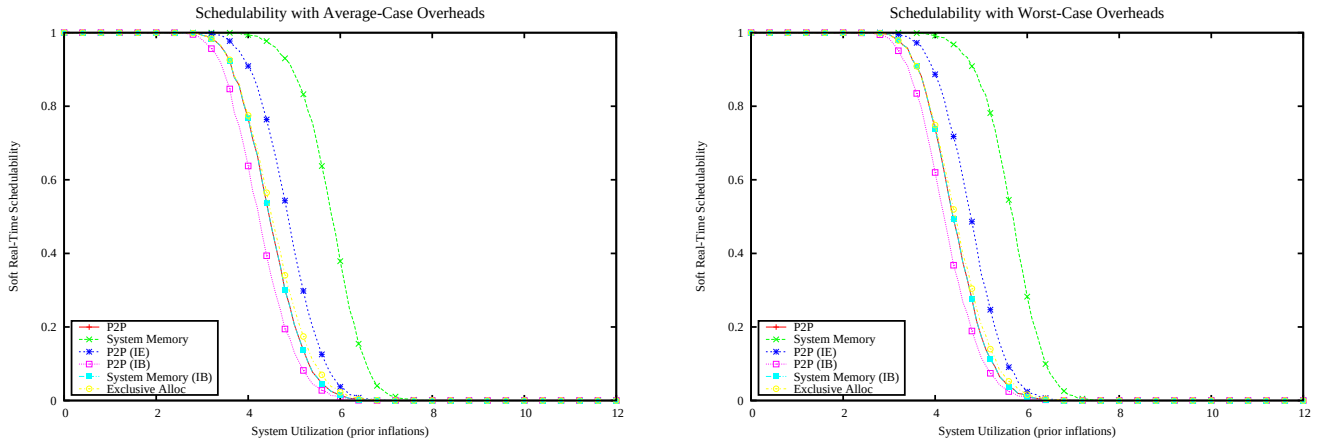

Figure 2381: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

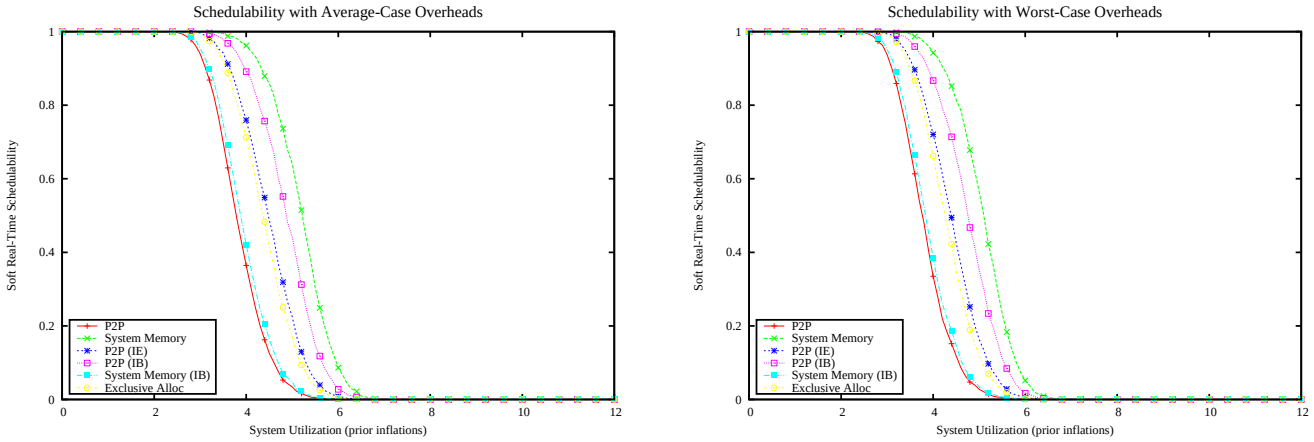

Figure 2382: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

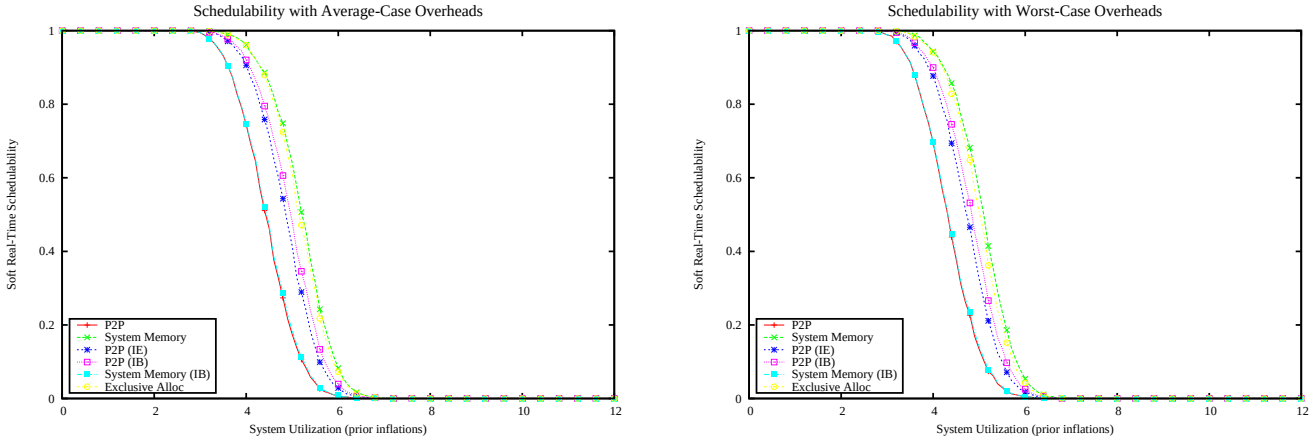

Figure 2383: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

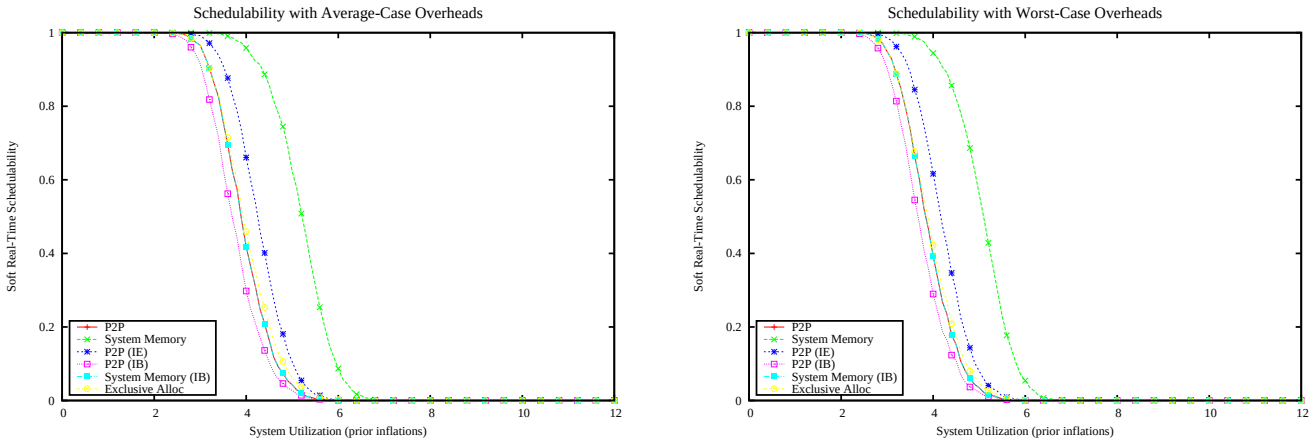

Figure 2384: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

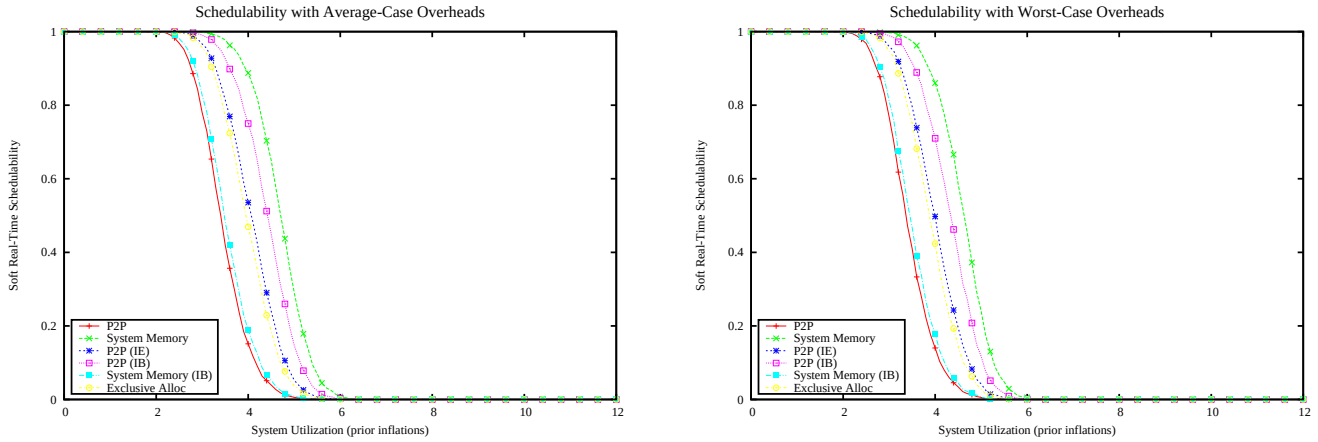

Figure 2385: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

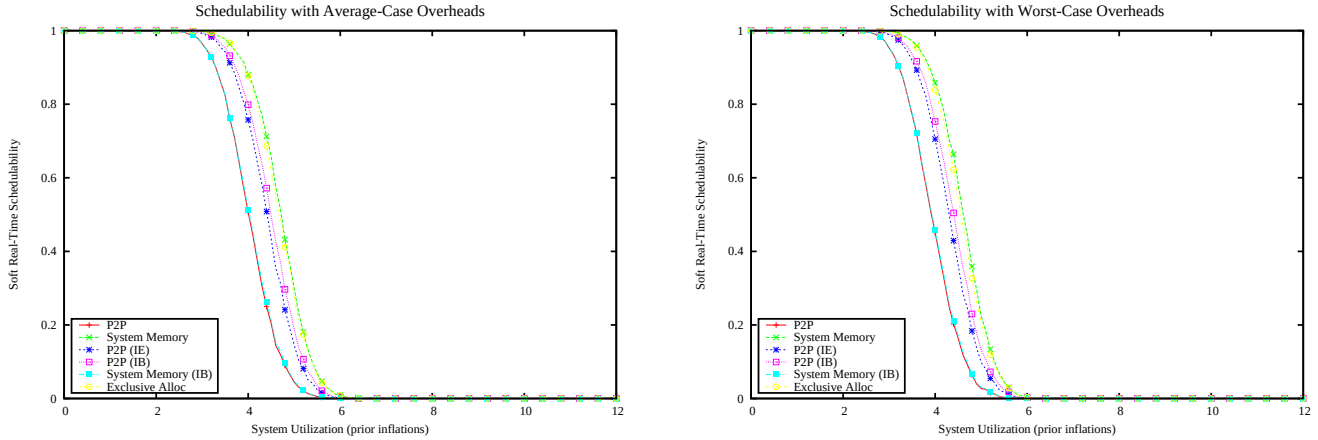

Figure 2386: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

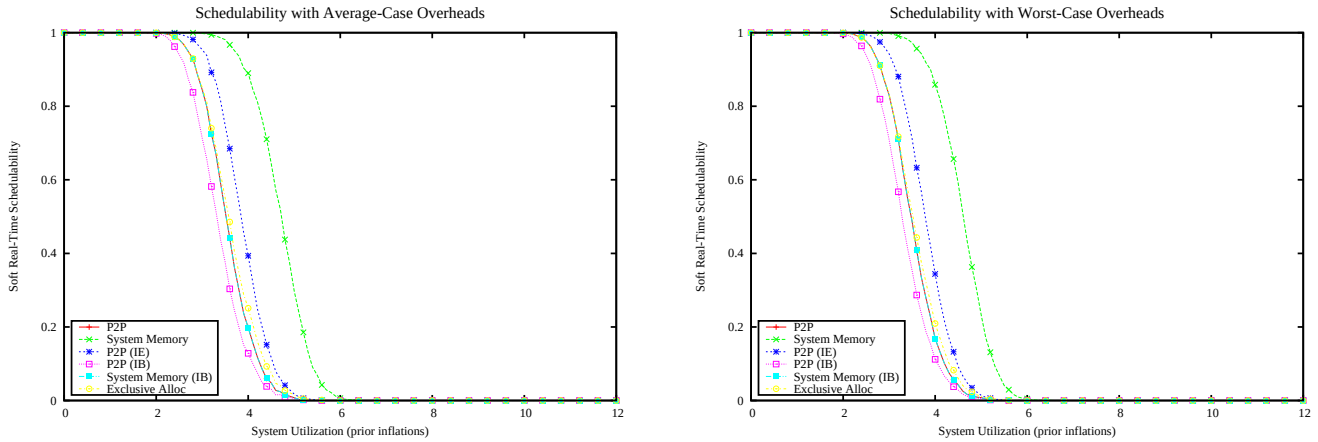

Figure 2387: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

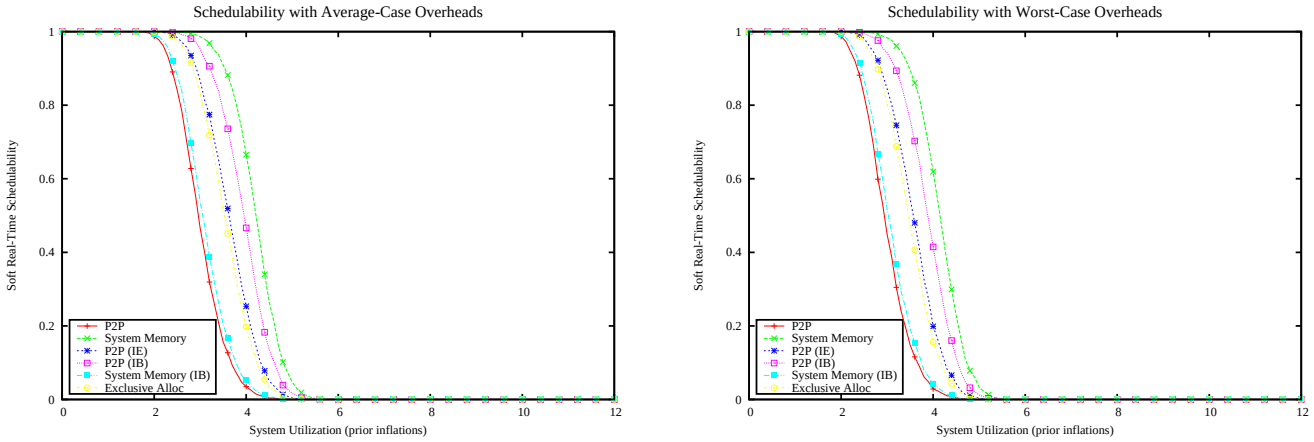

Figure 2388: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

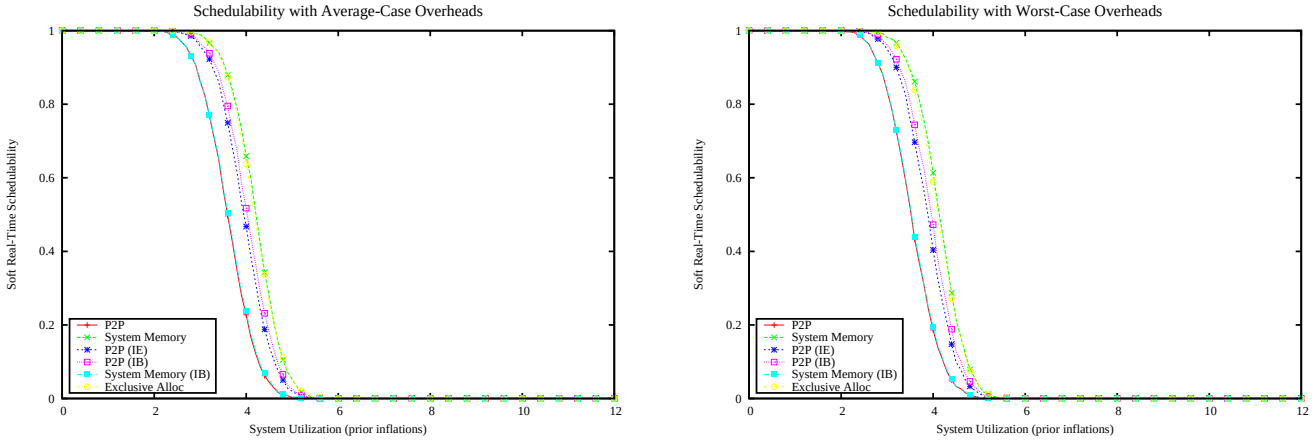

Figure 2389: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

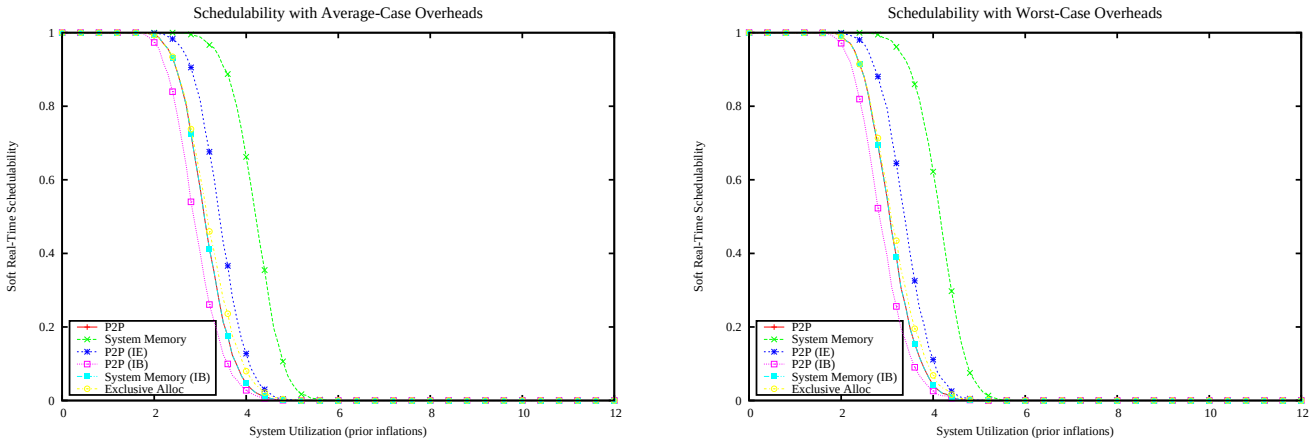

Figure 2390: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

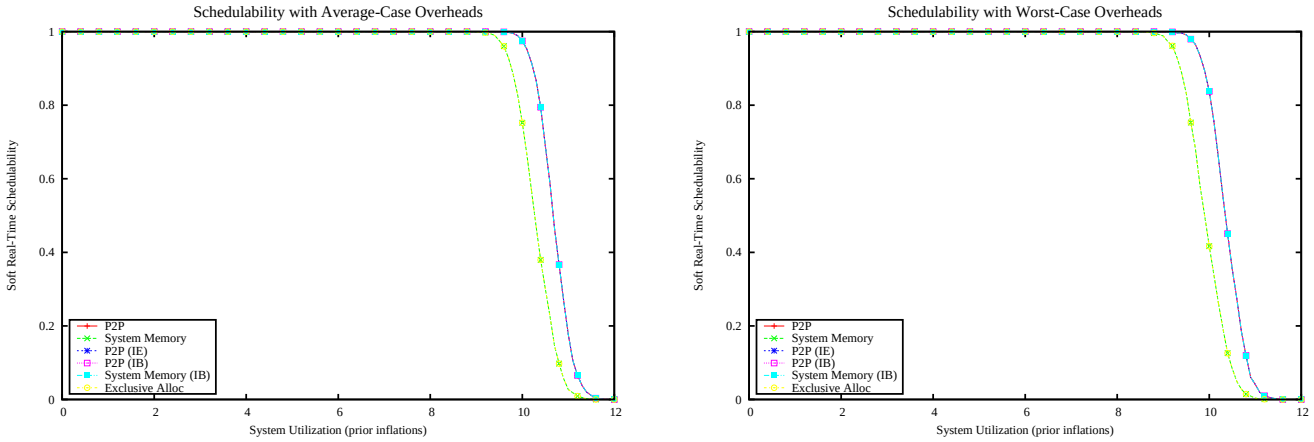

Figure 2391: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

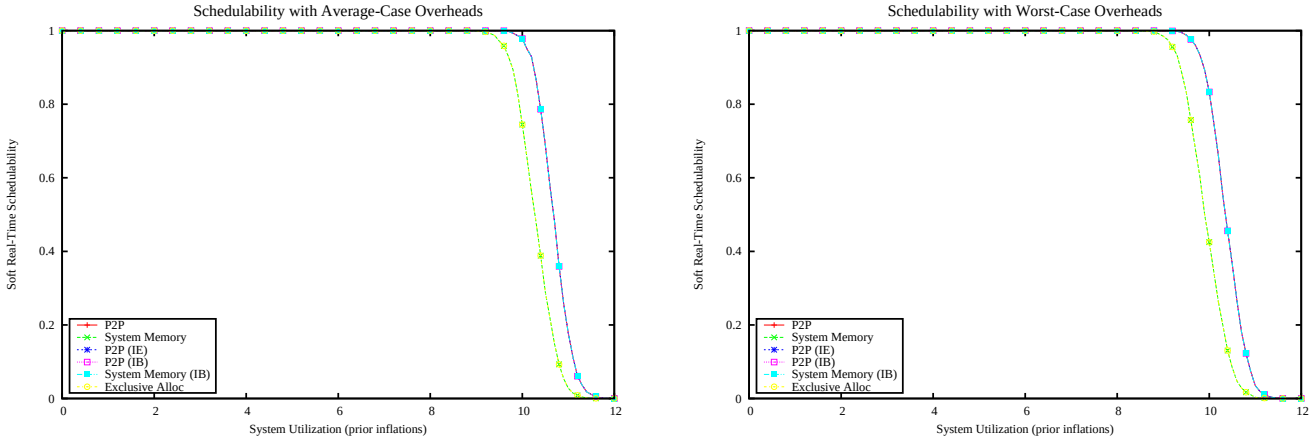

Figure 2392: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

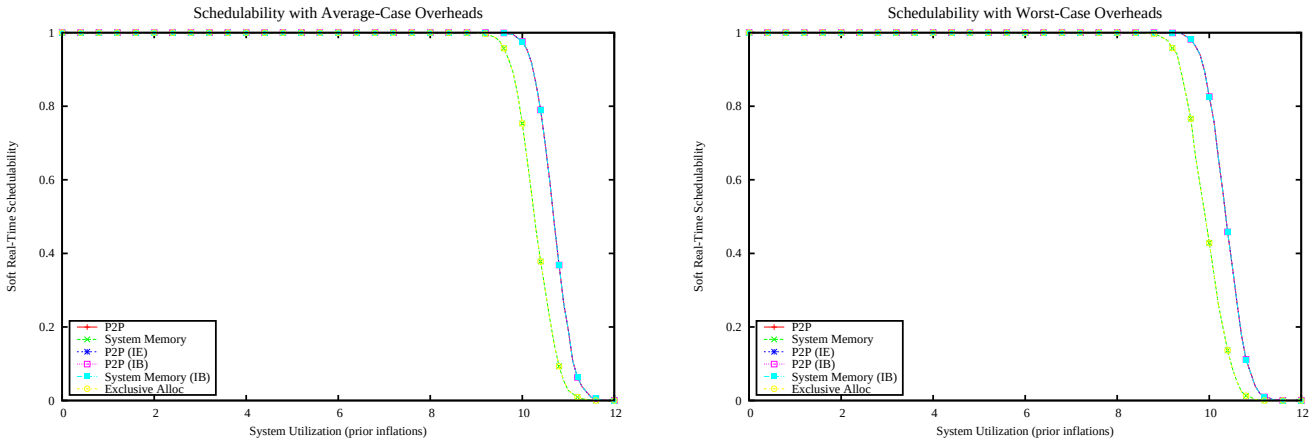

Figure 2393: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

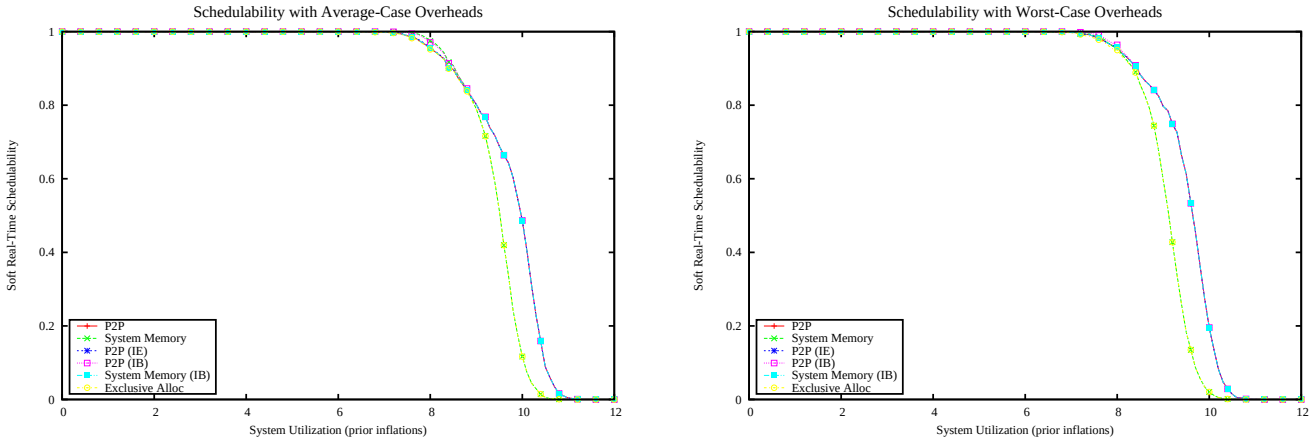

Figure 2394: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

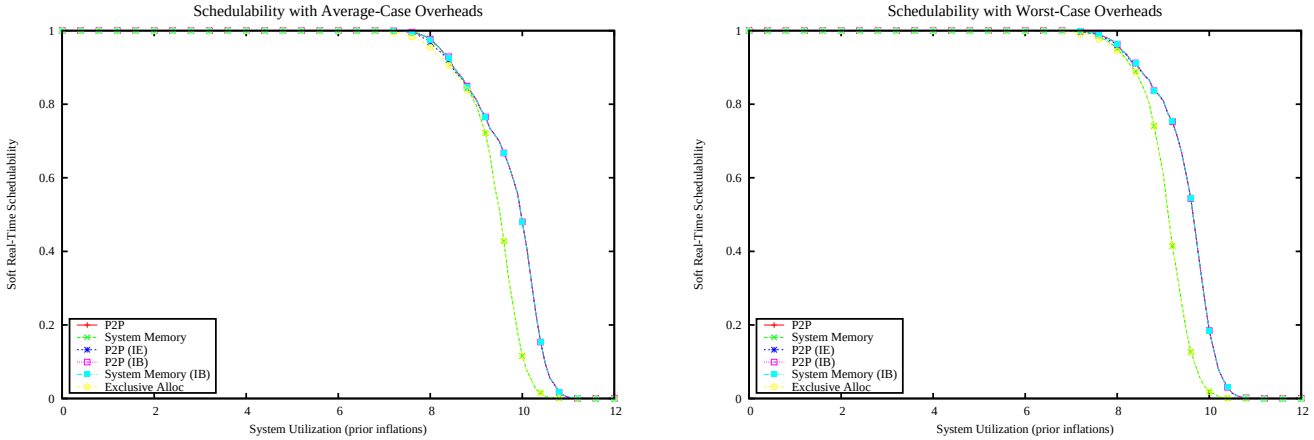

Figure 2395: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

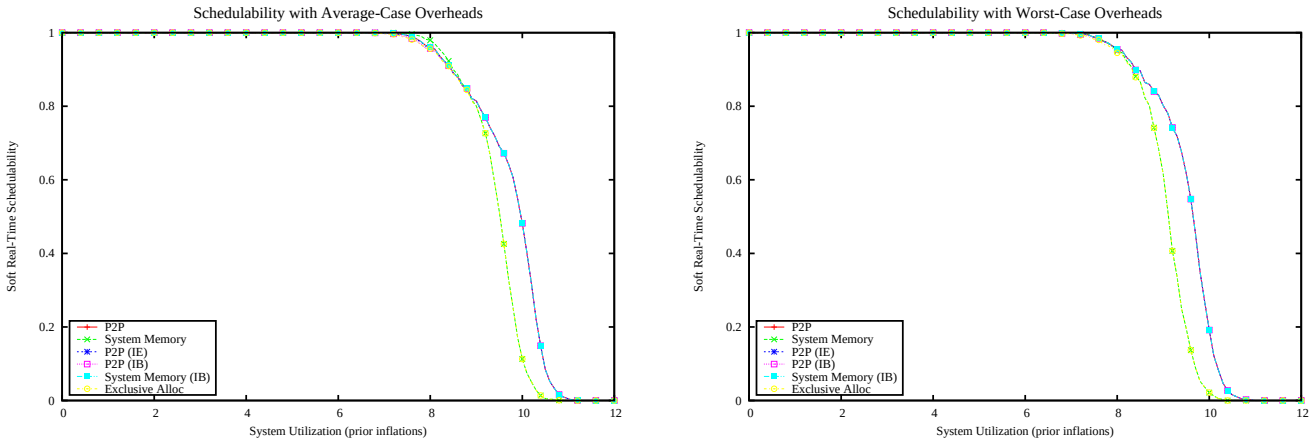

Figure 2396: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

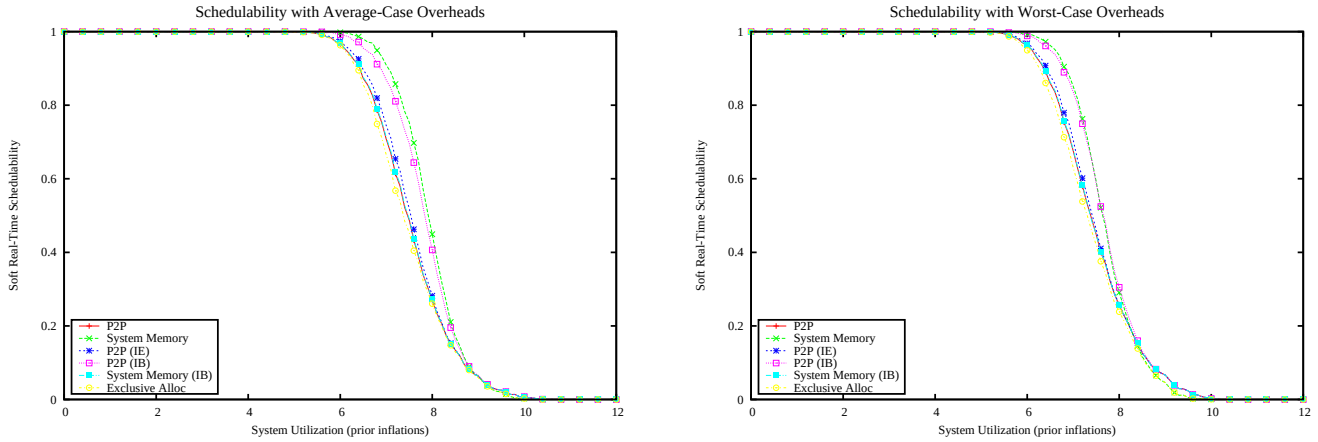

Figure 2397: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

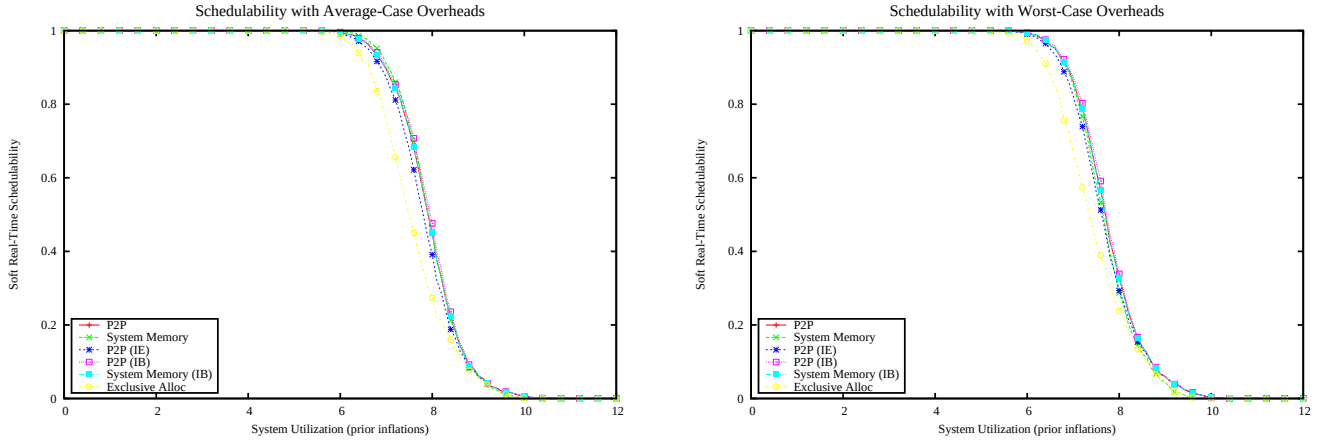

Figure 2398: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

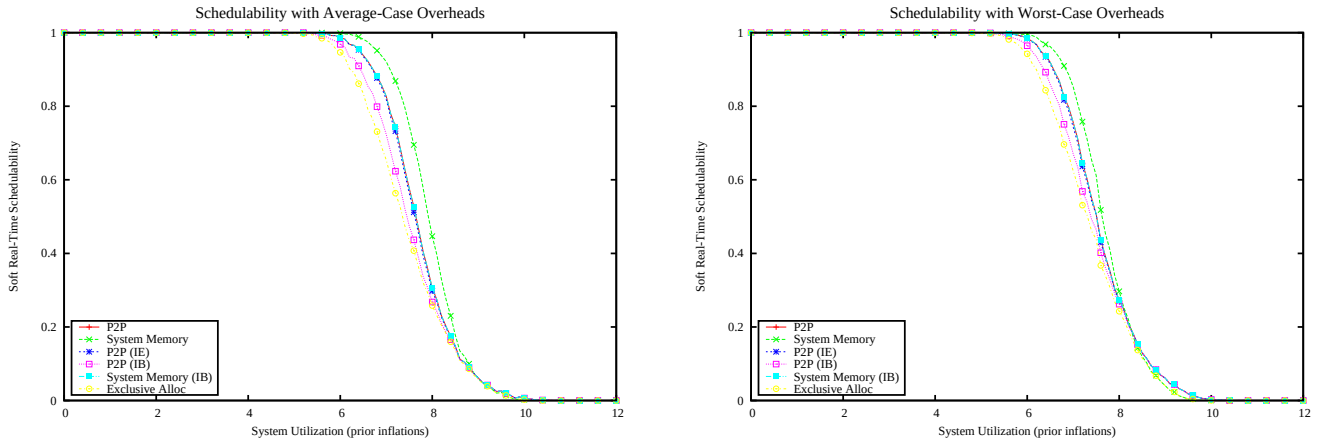

Figure 2399: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

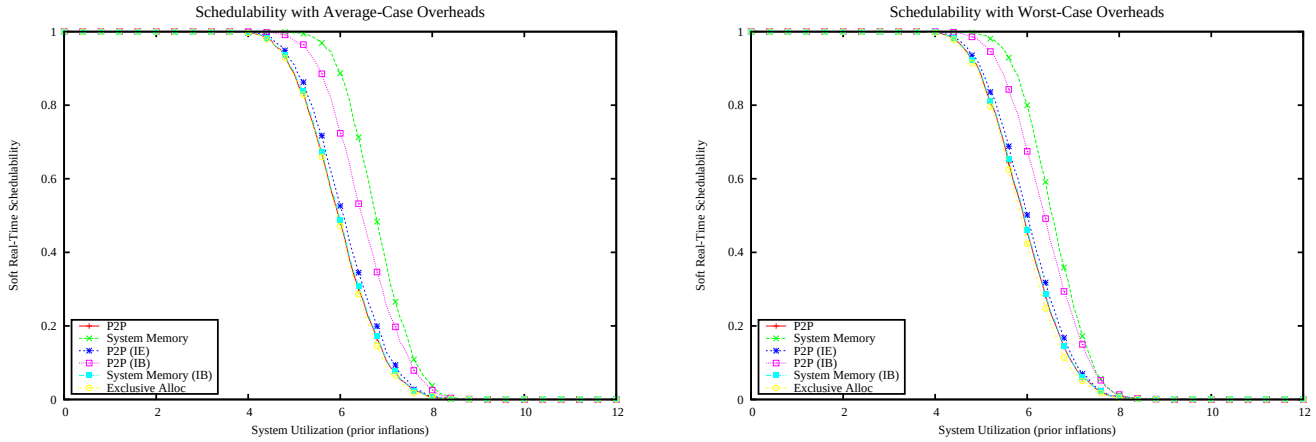

Figure 2400: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

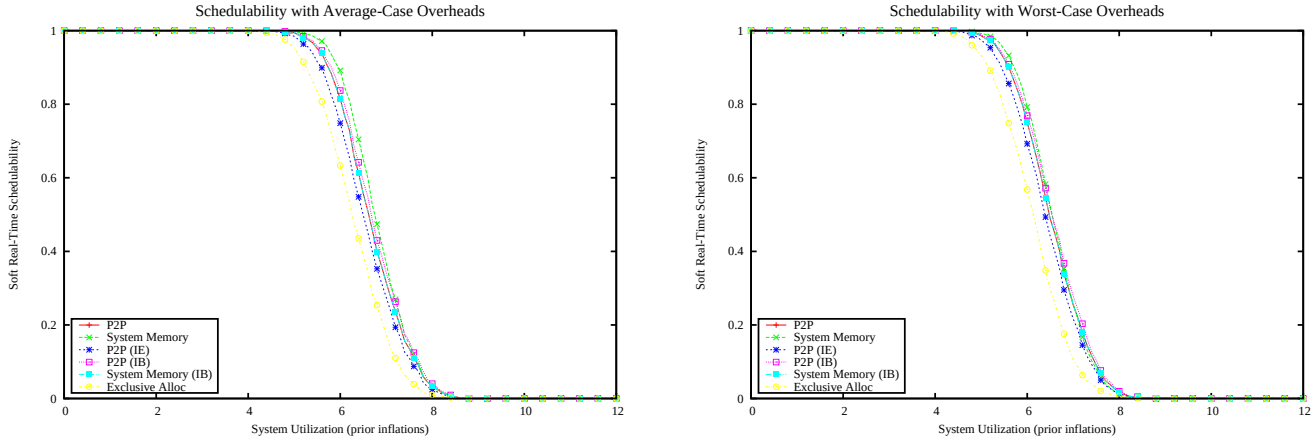

Figure 2401: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

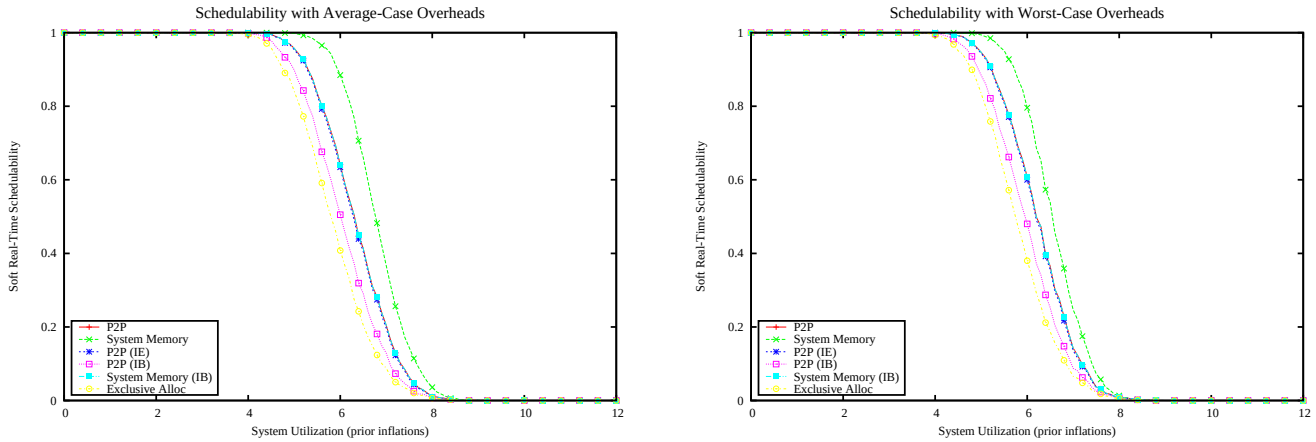

Figure 2402: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

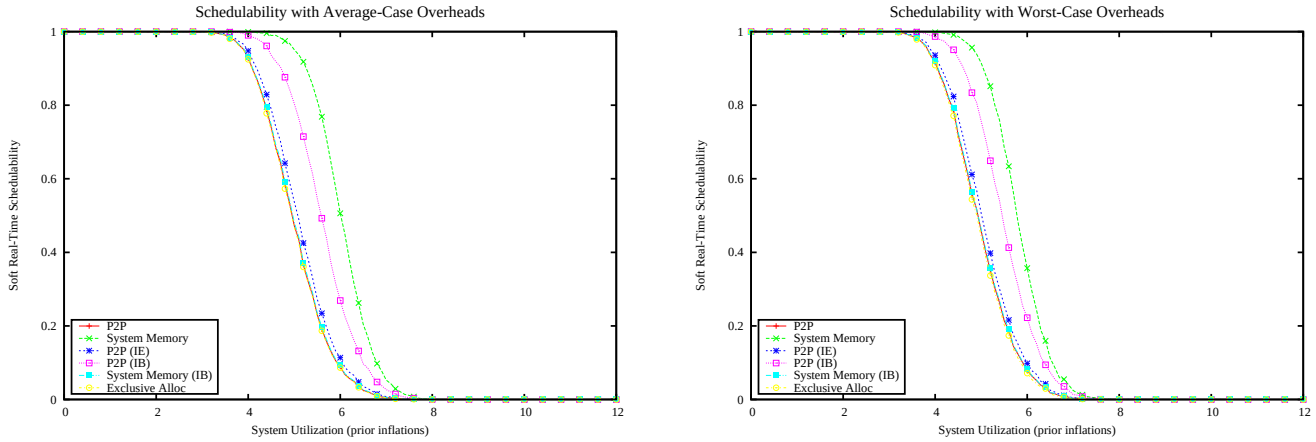

Figure 2403: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

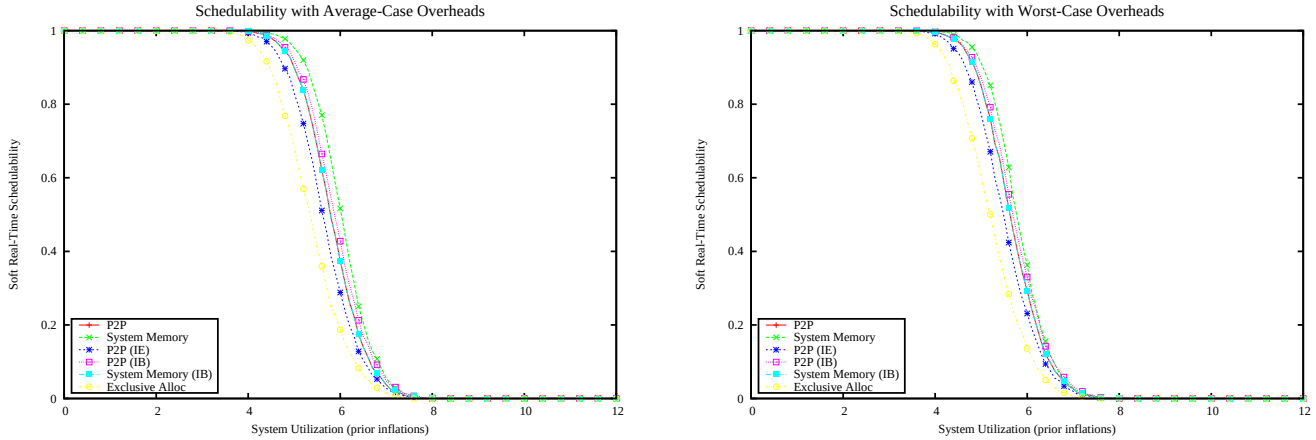

Figure 2404: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

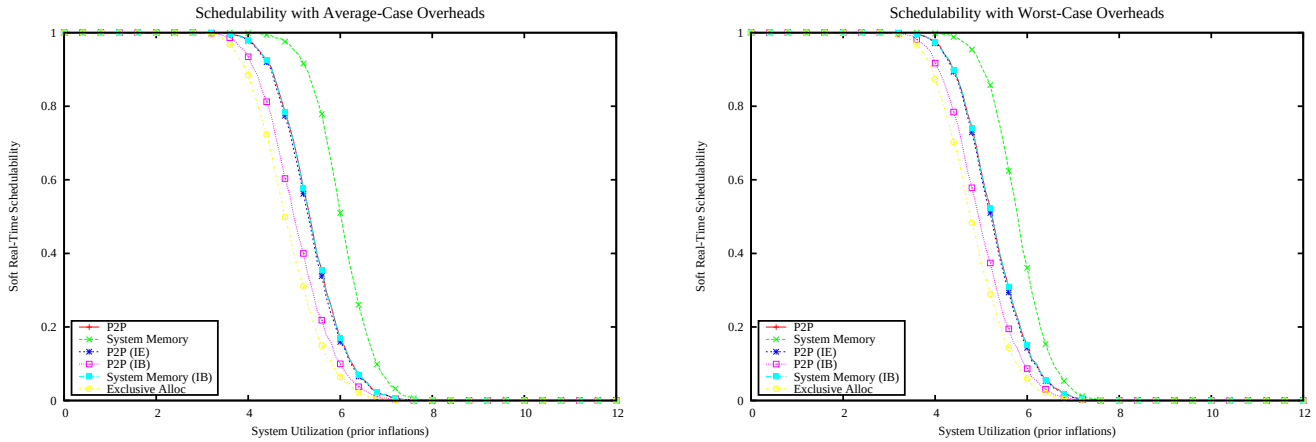

Figure 2405: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

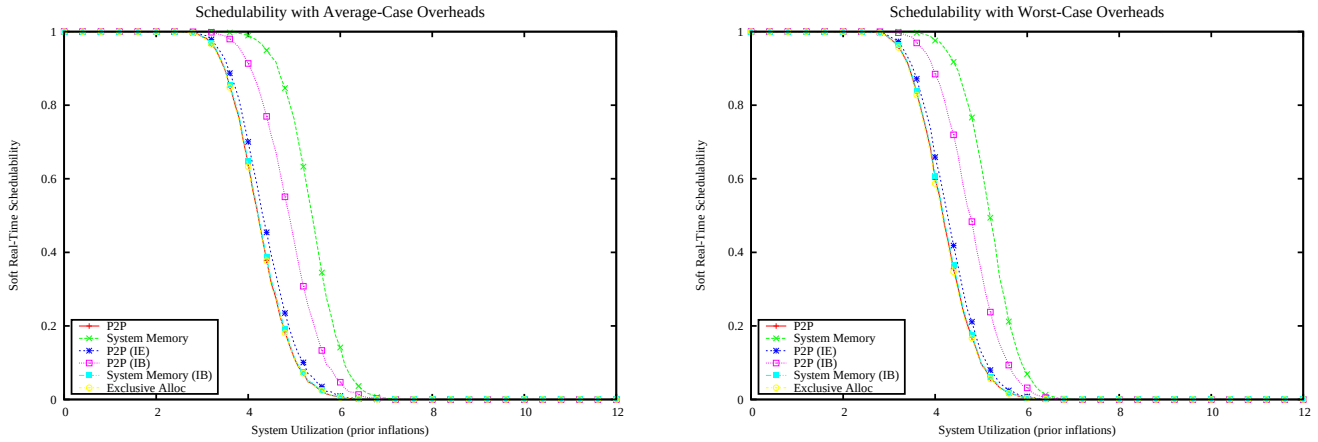

Figure 2406: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

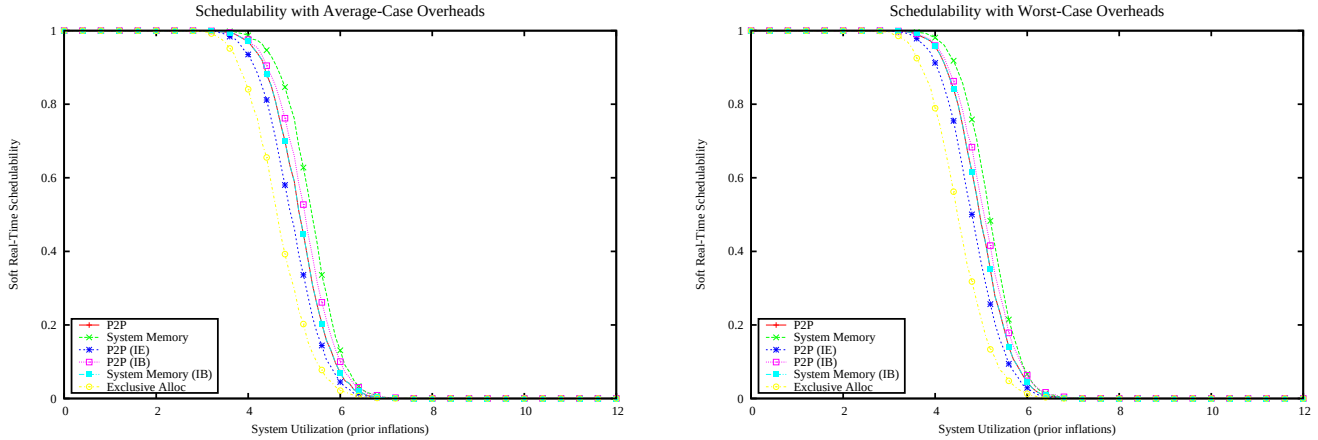

Figure 2407: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

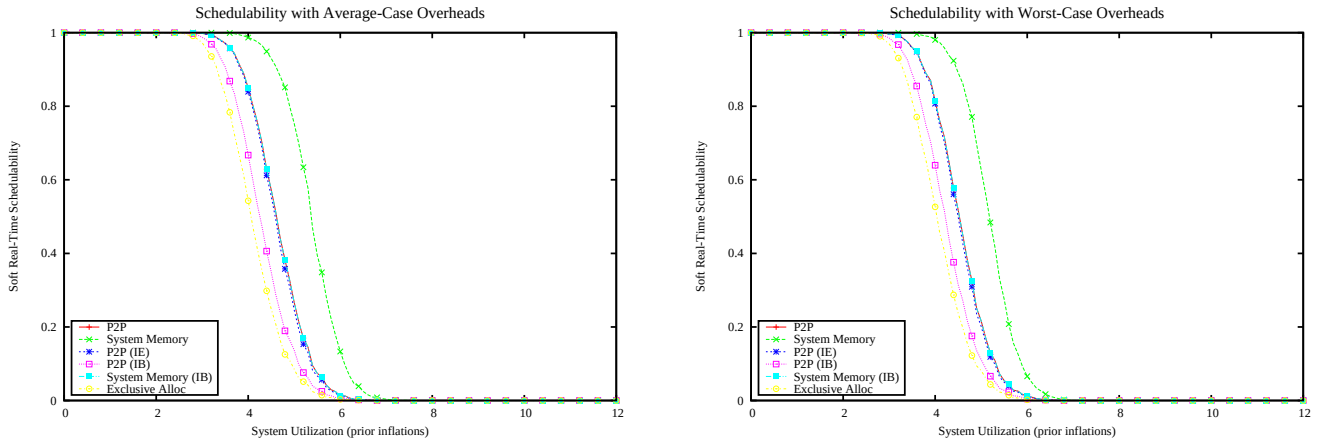

Figure 2408: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

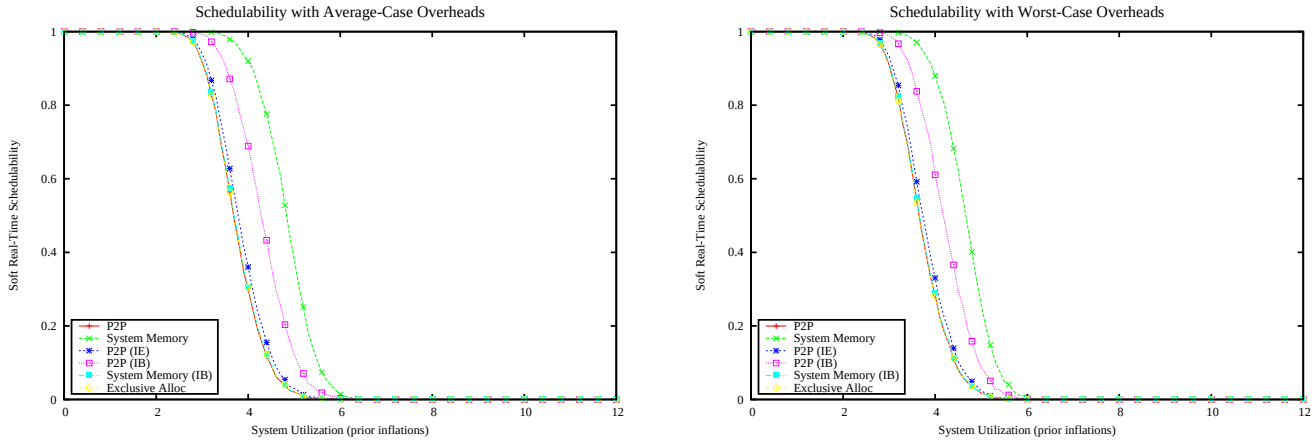

Figure 2409: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

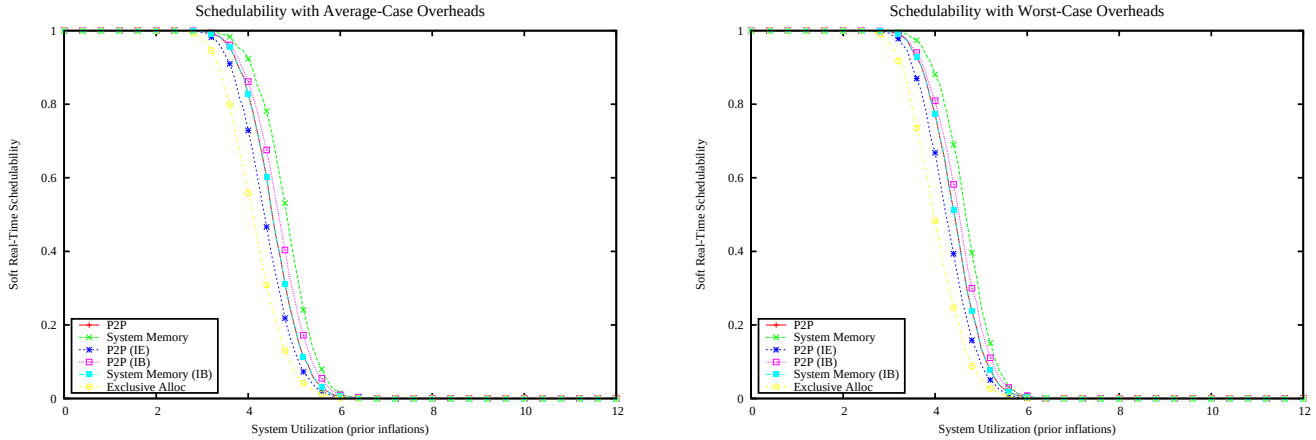

Figure 2410: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

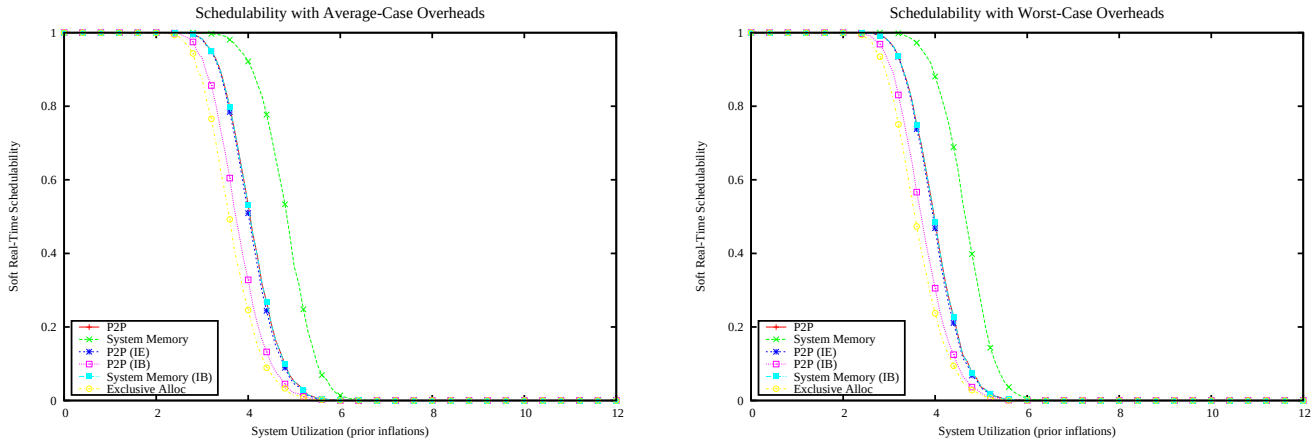

Figure 2411: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

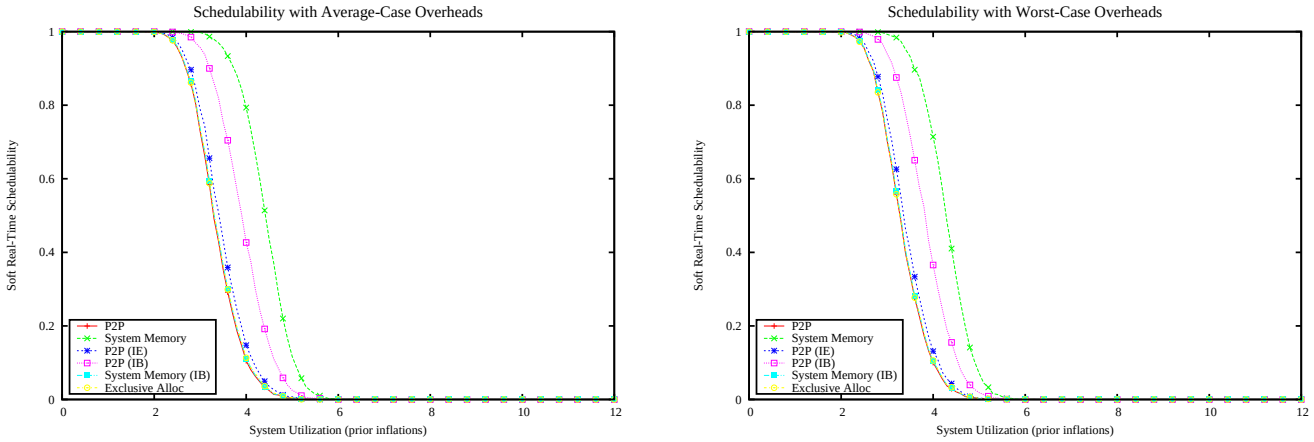

Figure 2412: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

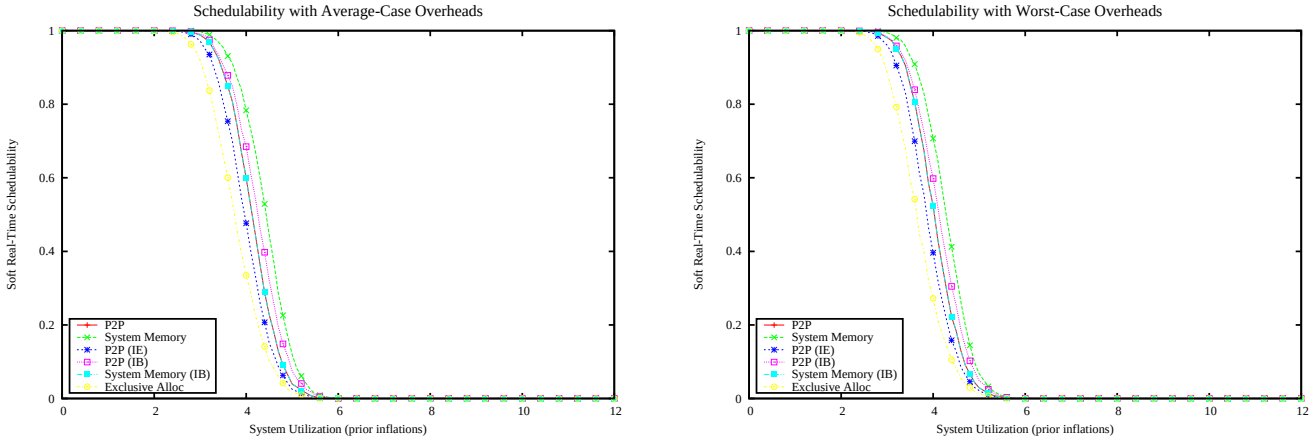

Figure 2413: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

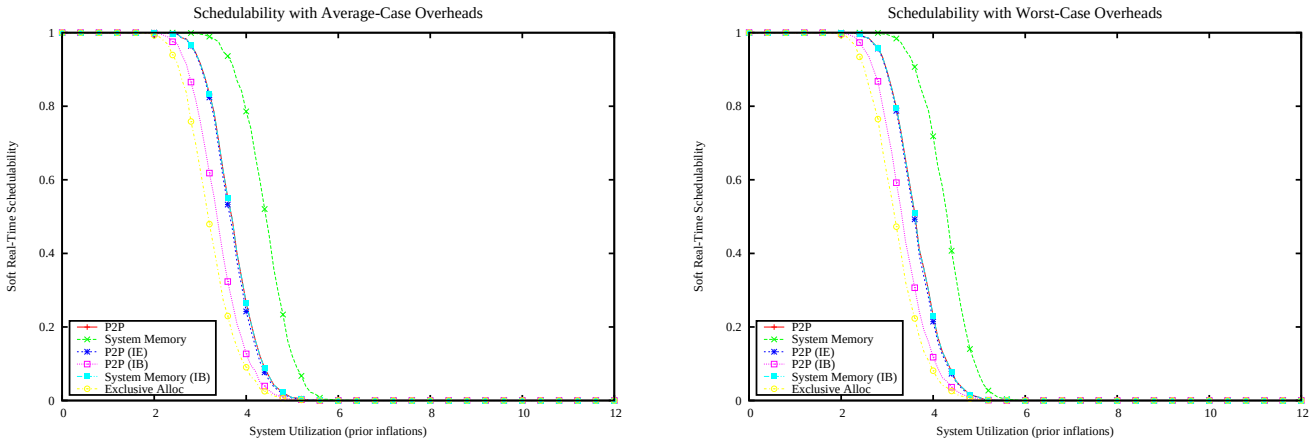

Figure 2414: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

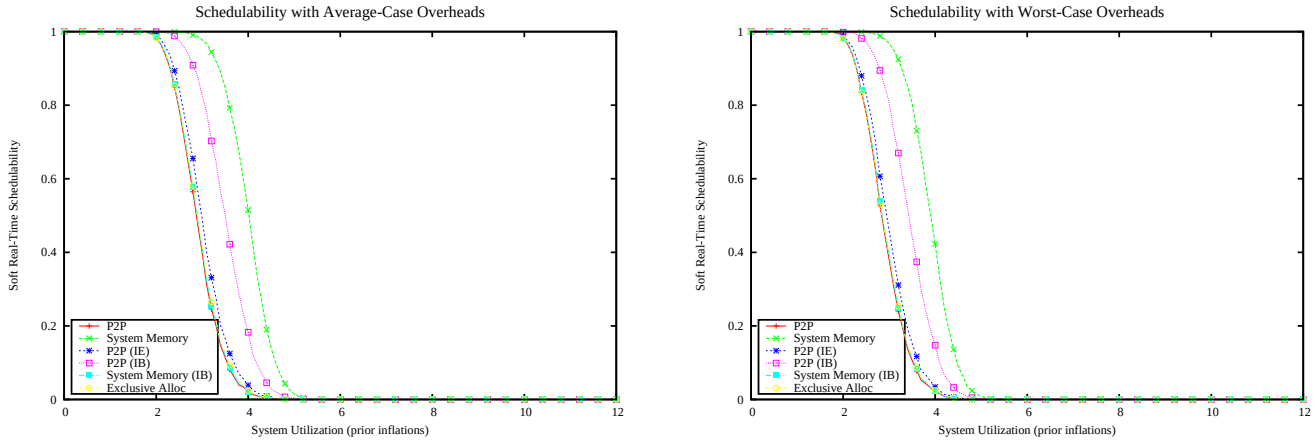

Figure 2415: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

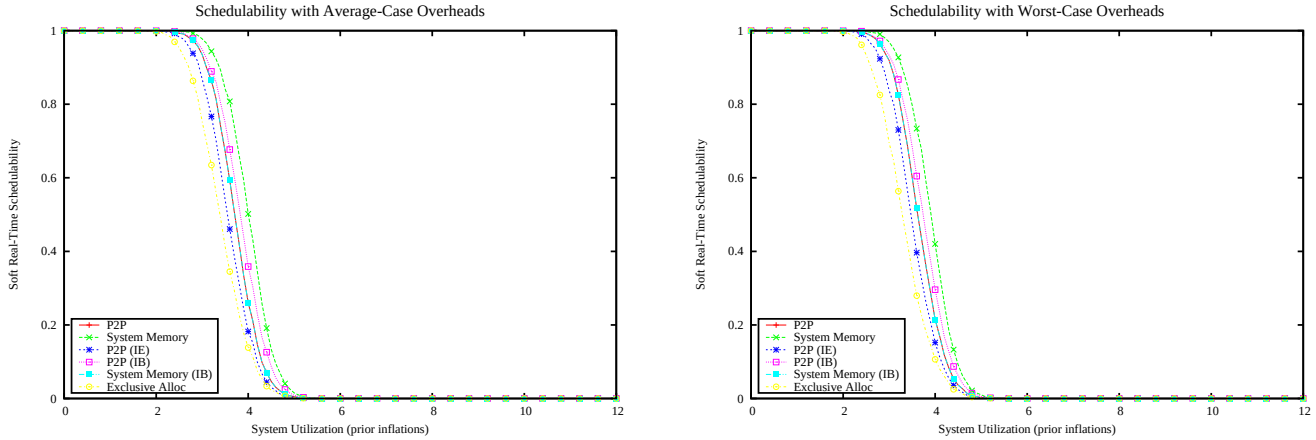

Figure 2416: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

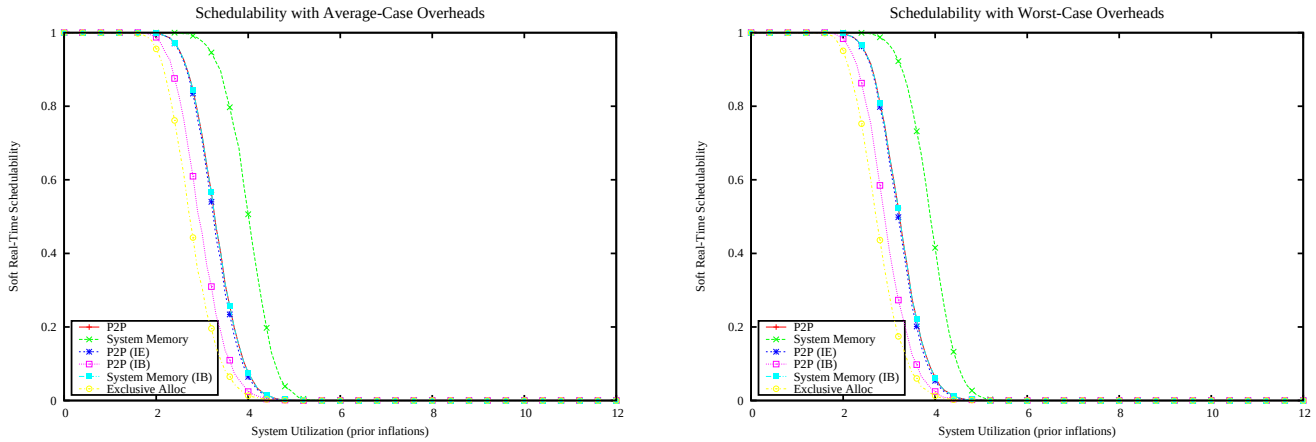

Figure 2417: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

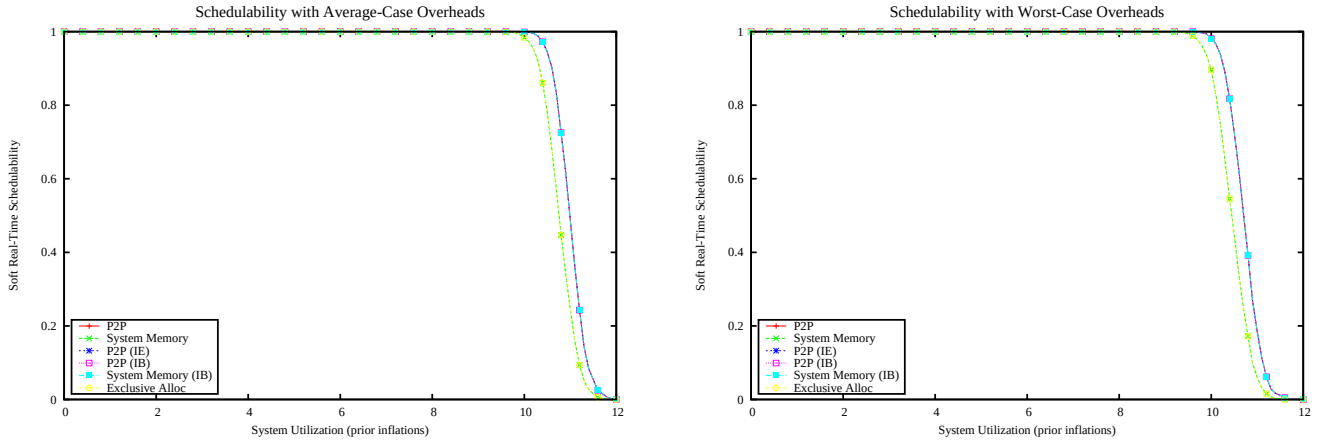

Figure 2418: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

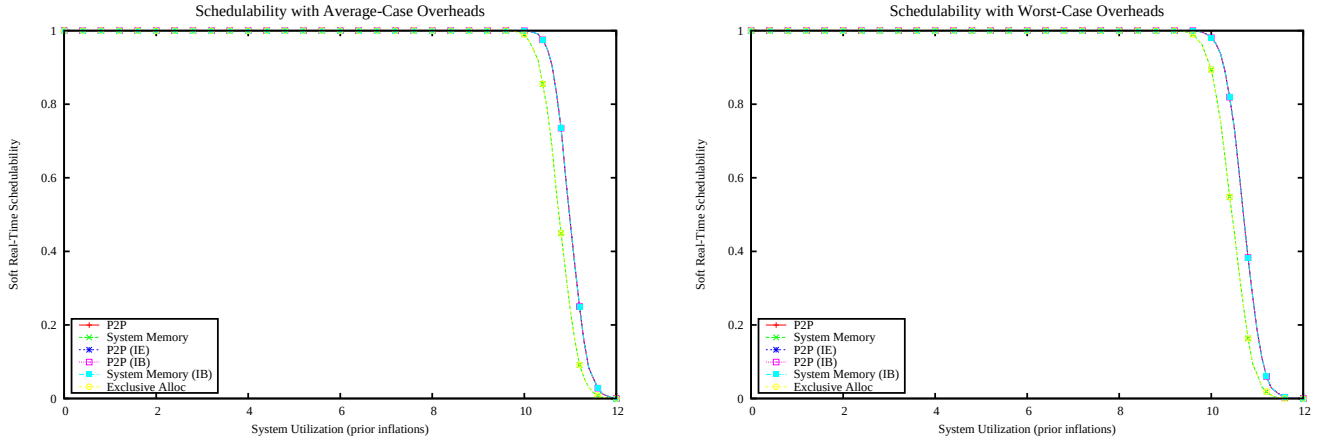

Figure 2419: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

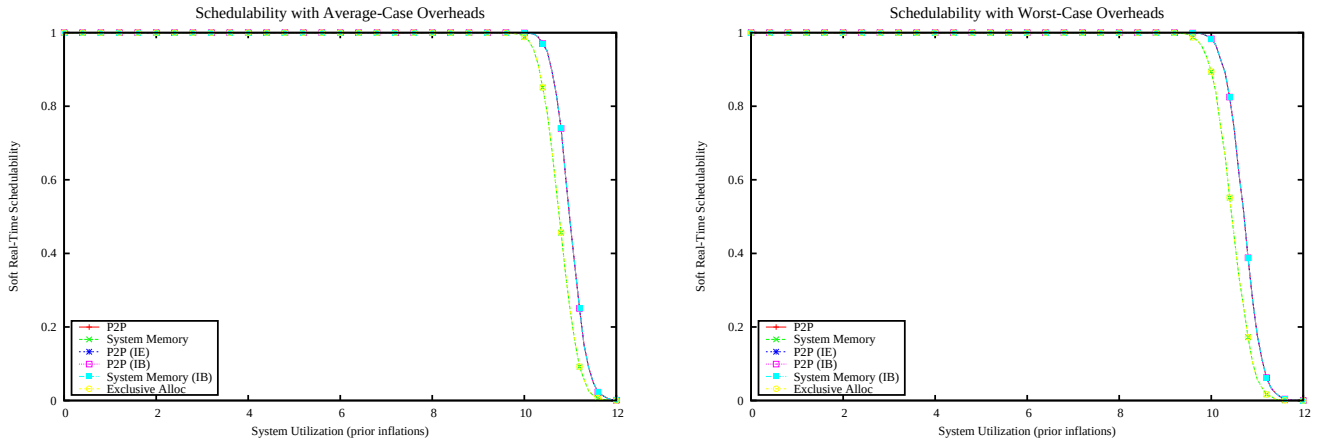

Figure 2420: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

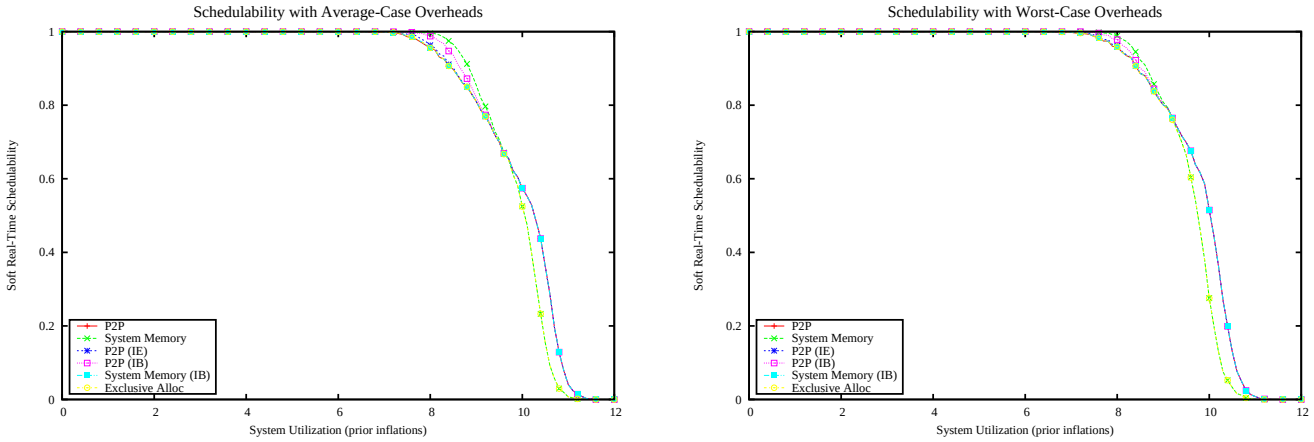

Figure 2421: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

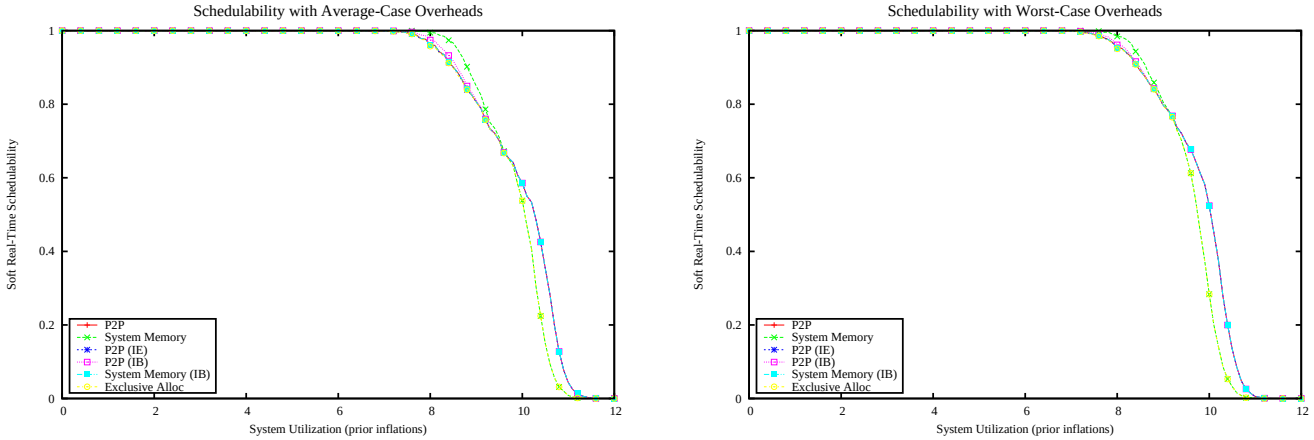

Figure 2422: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

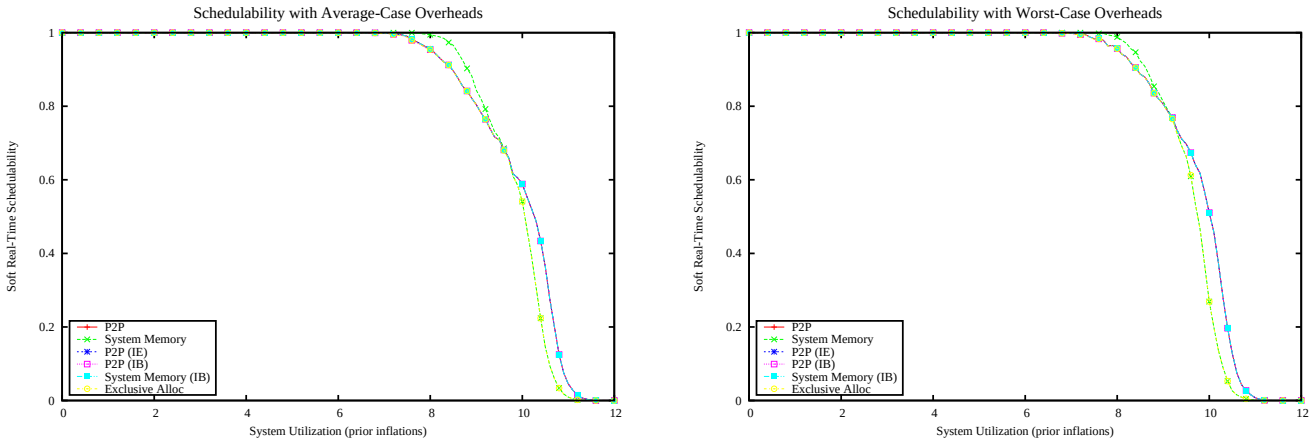

Figure 2423: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

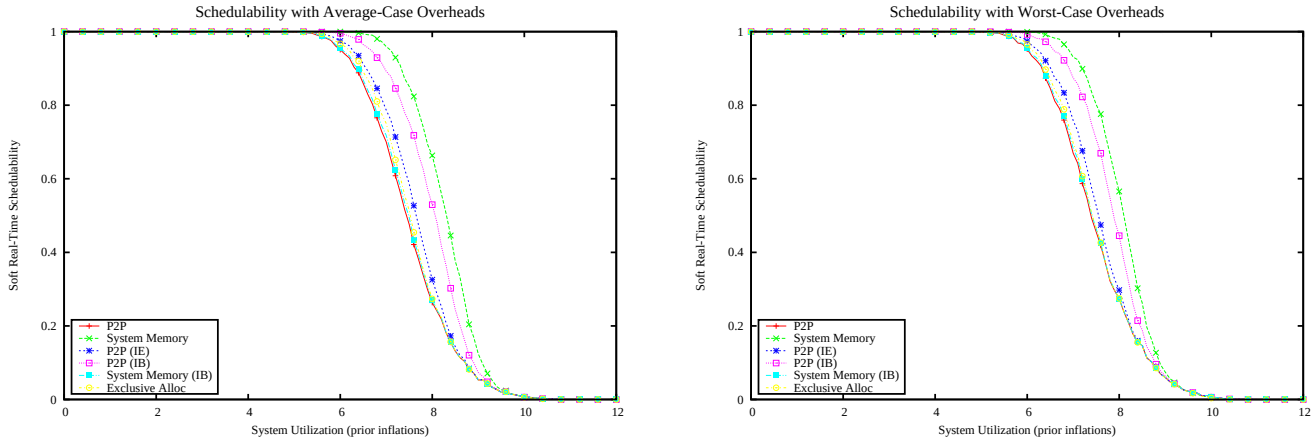

Figure 2424: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

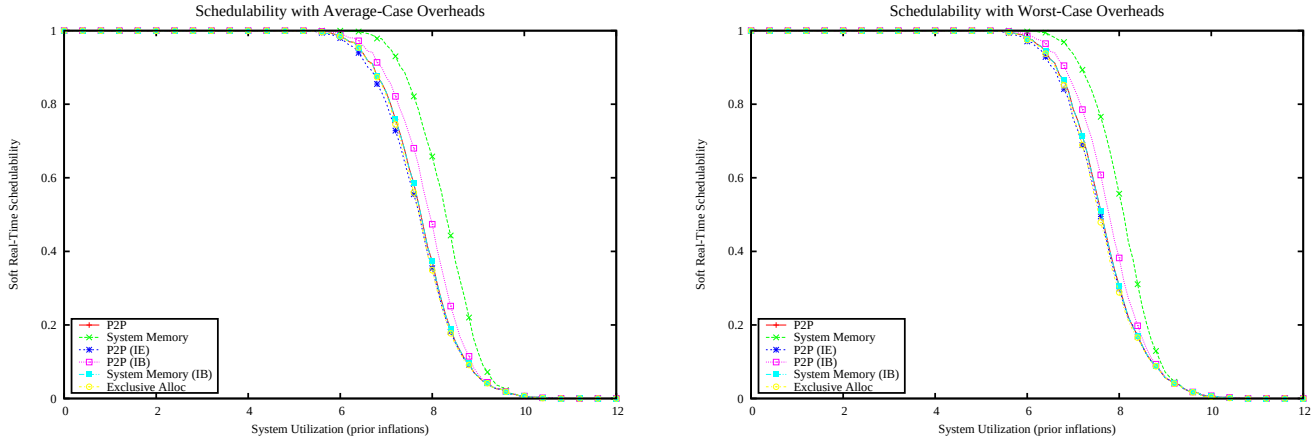

Figure 2425: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

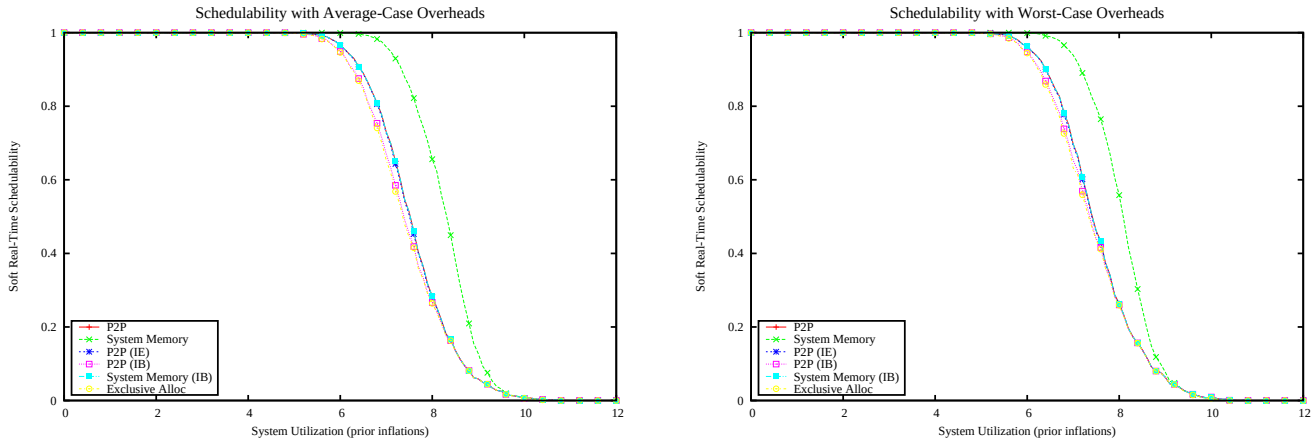

Figure 2426: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

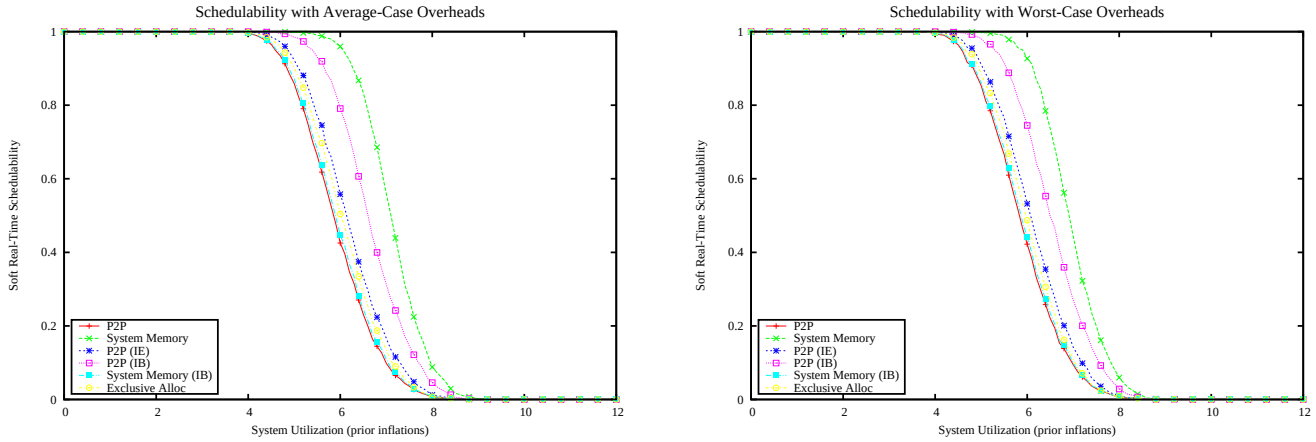

Figure 2427: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

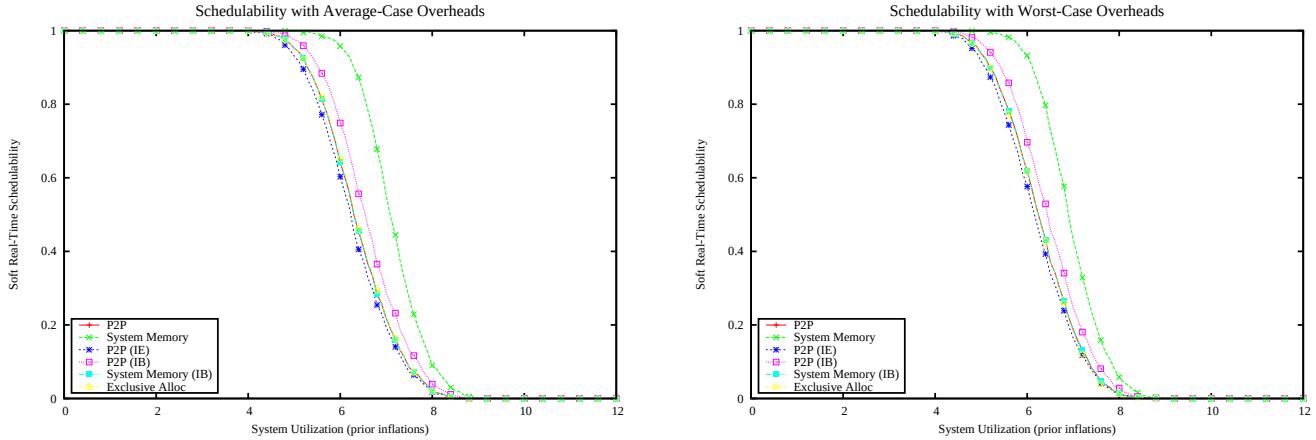

Figure 2428: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

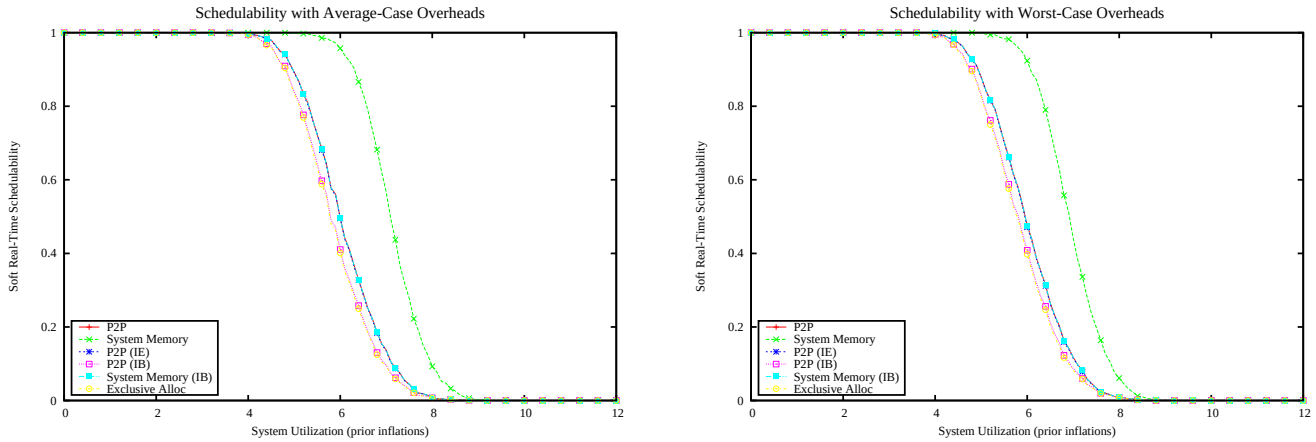

Figure 2429: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

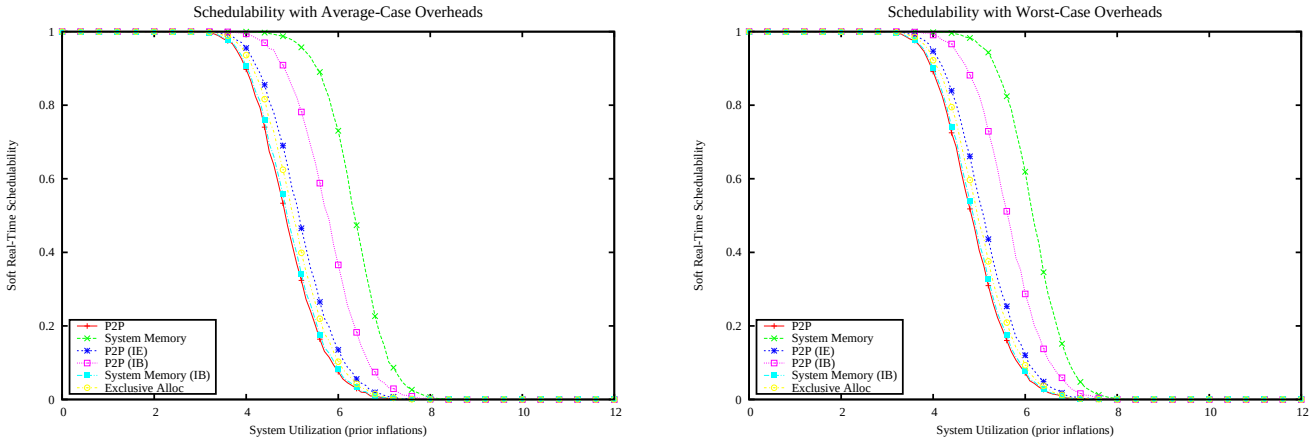

Figure 2430: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

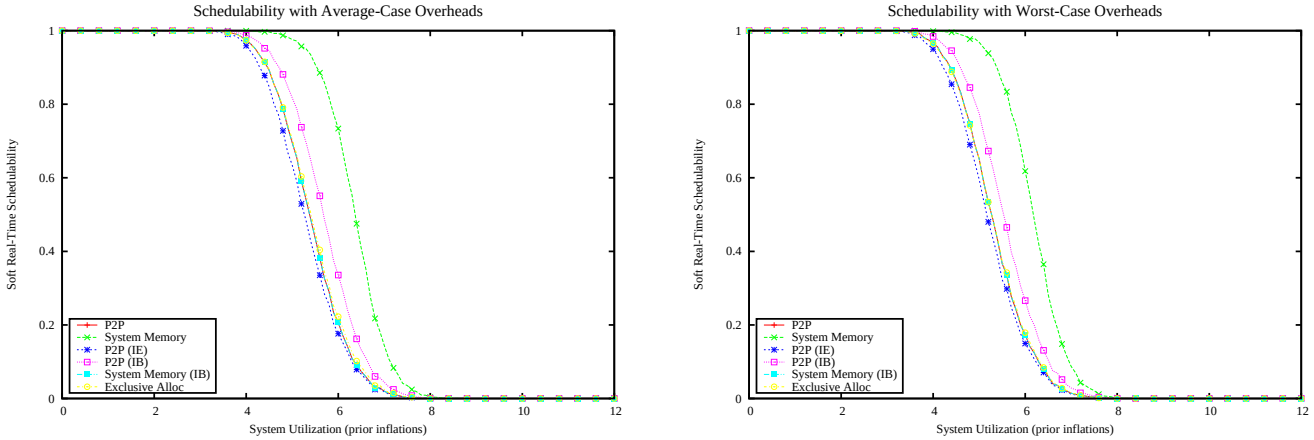

Figure 2431: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

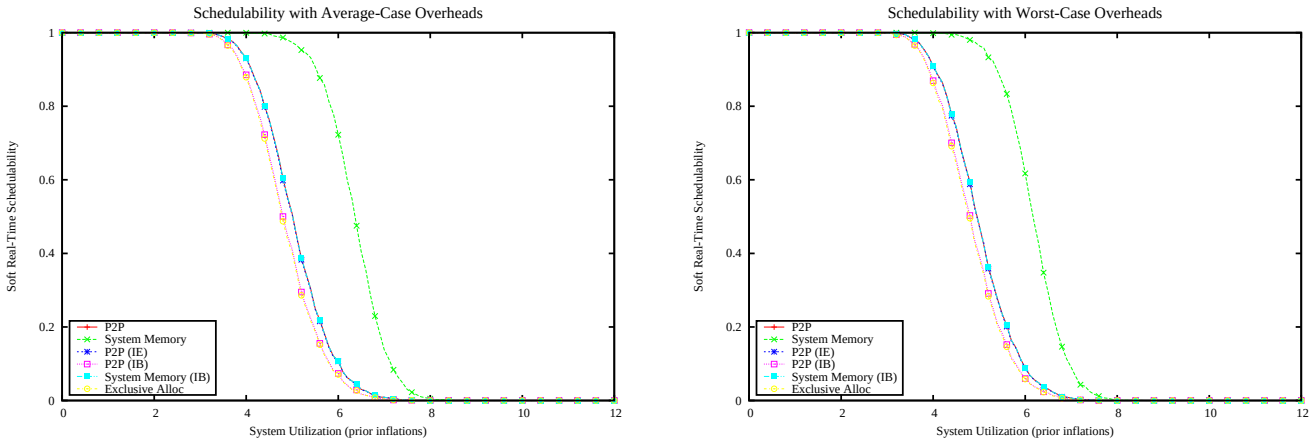

Figure 2432: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

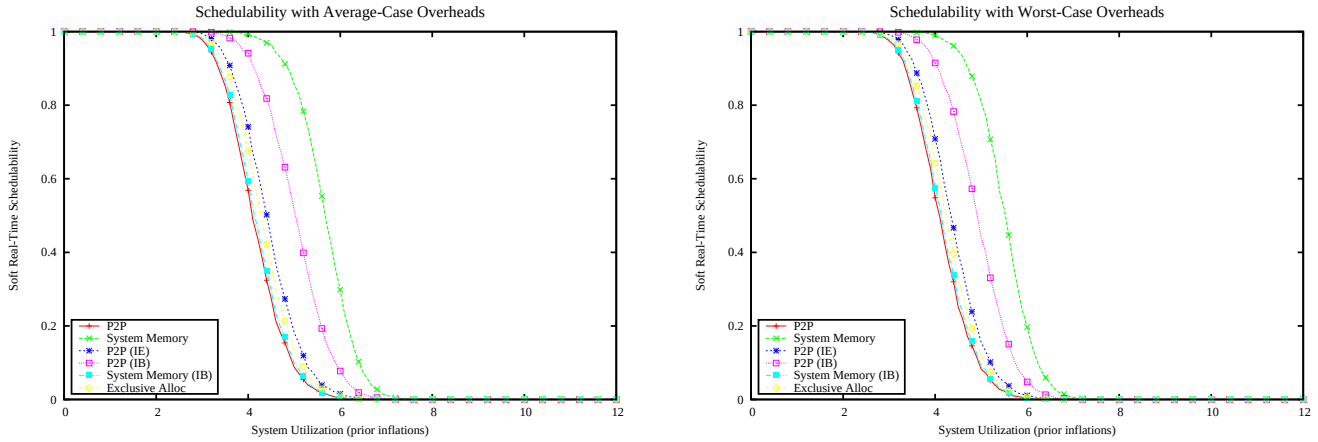

Figure 2433: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

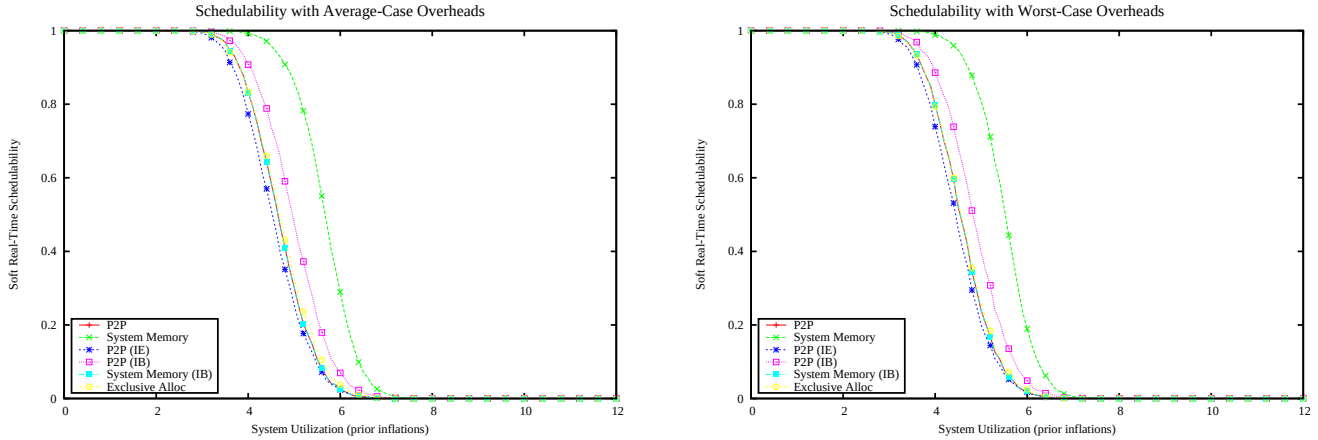

Figure 2434: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

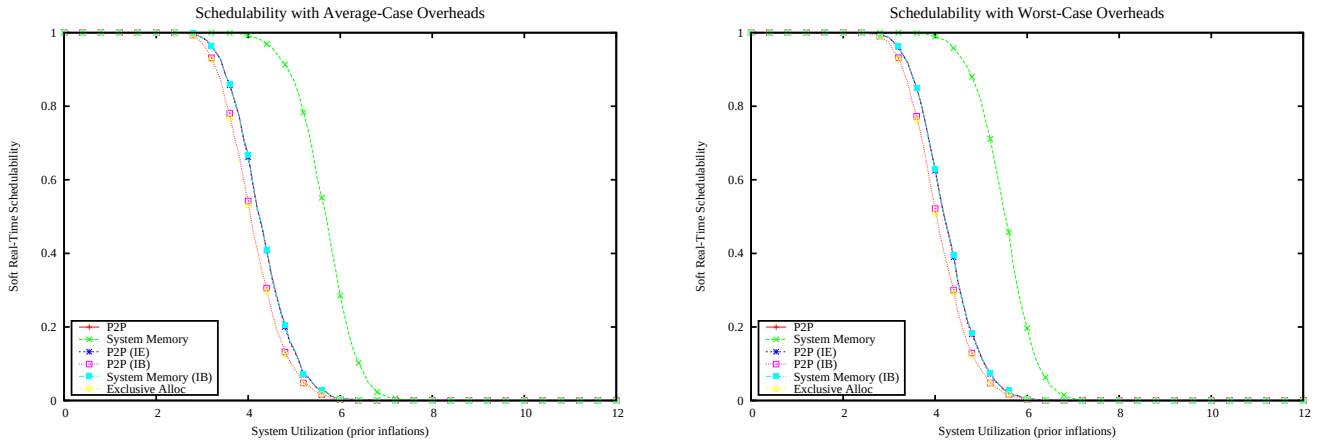

Figure 2435: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

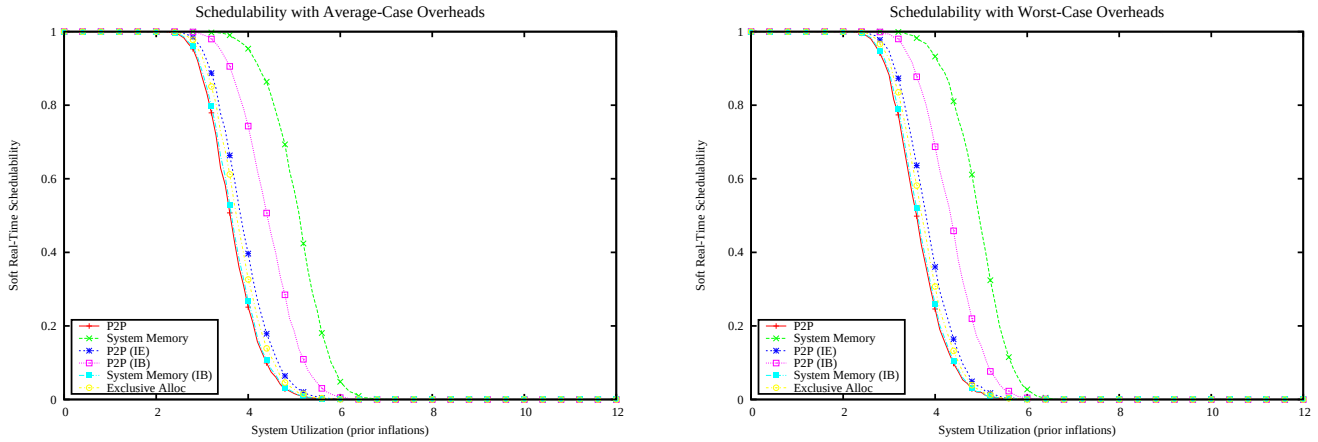

Figure 2436: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

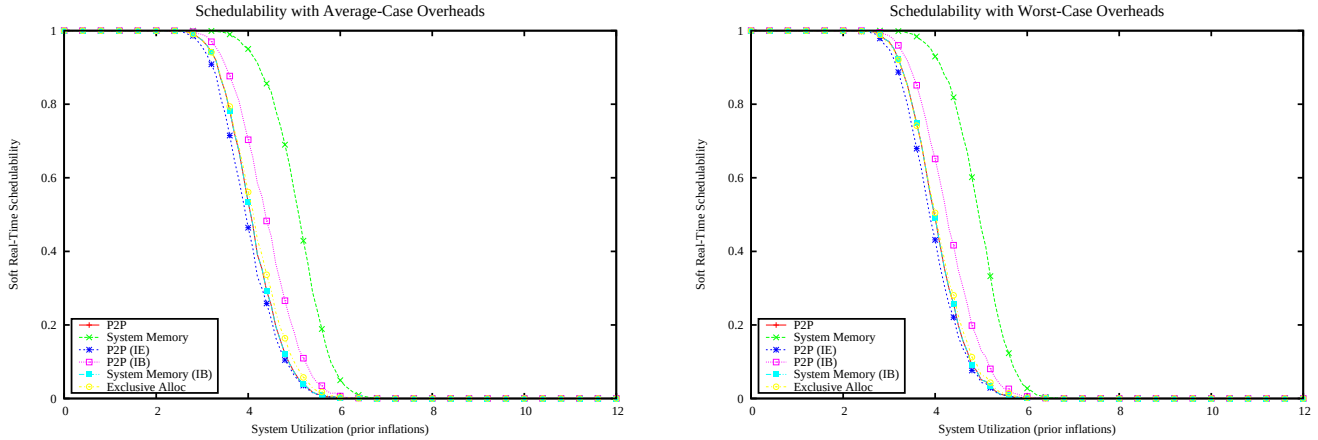

Figure 2437: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

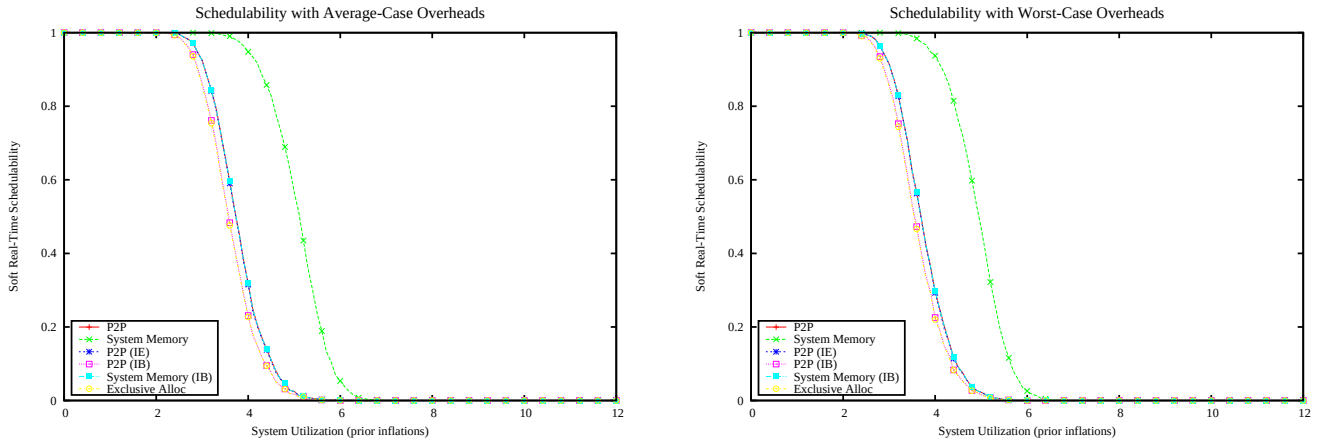

Figure 2438: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

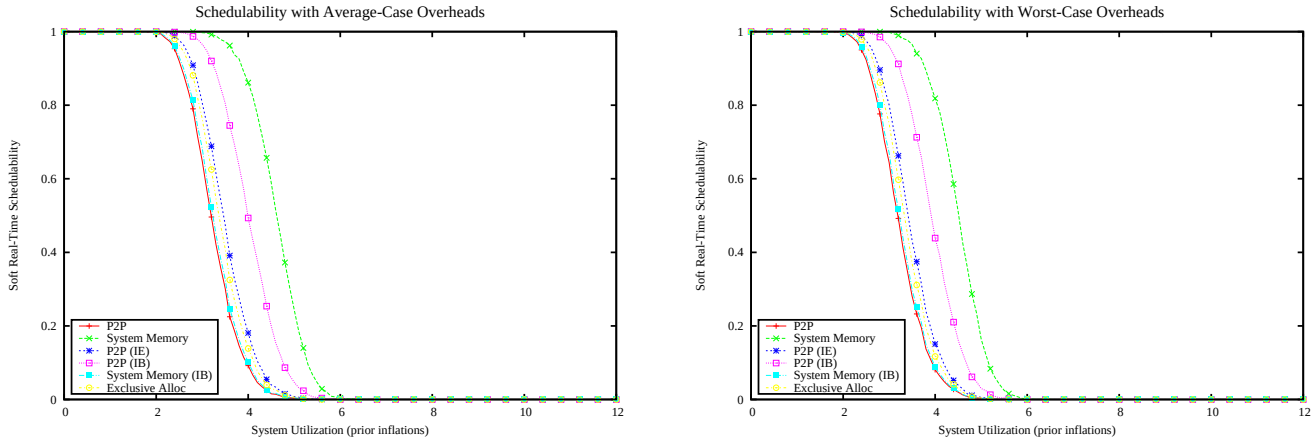

Figure 2439: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

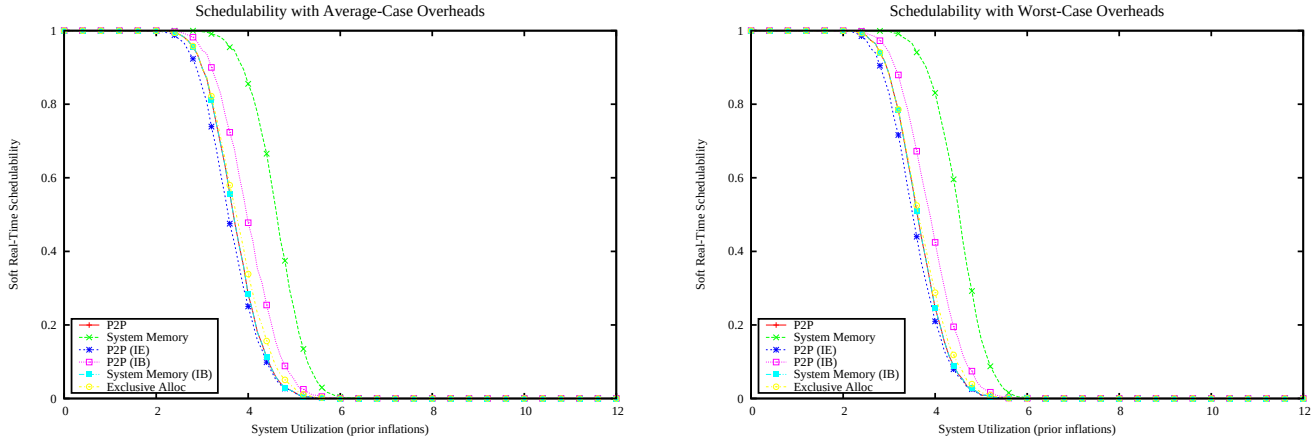

Figure 2440: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

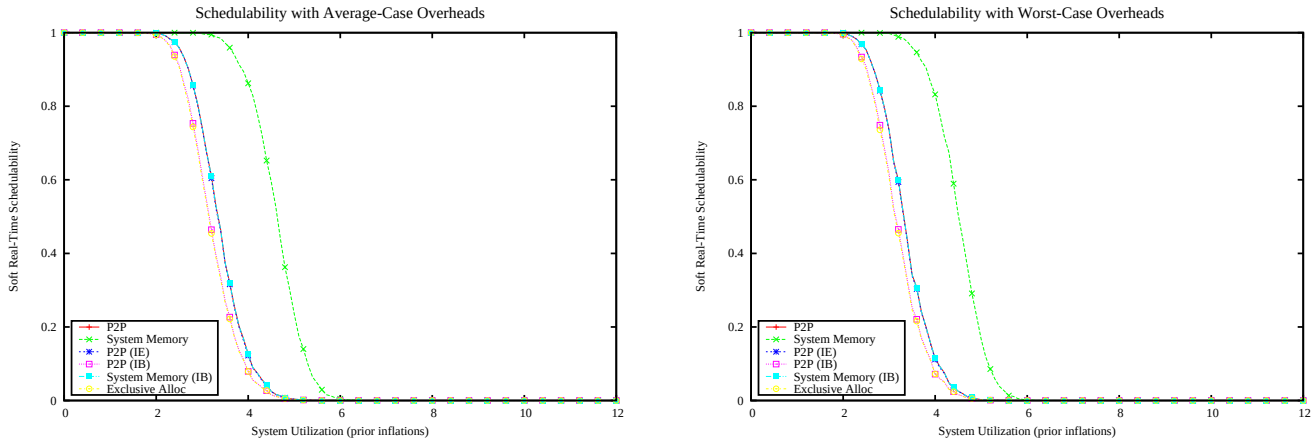

Figure 2441: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

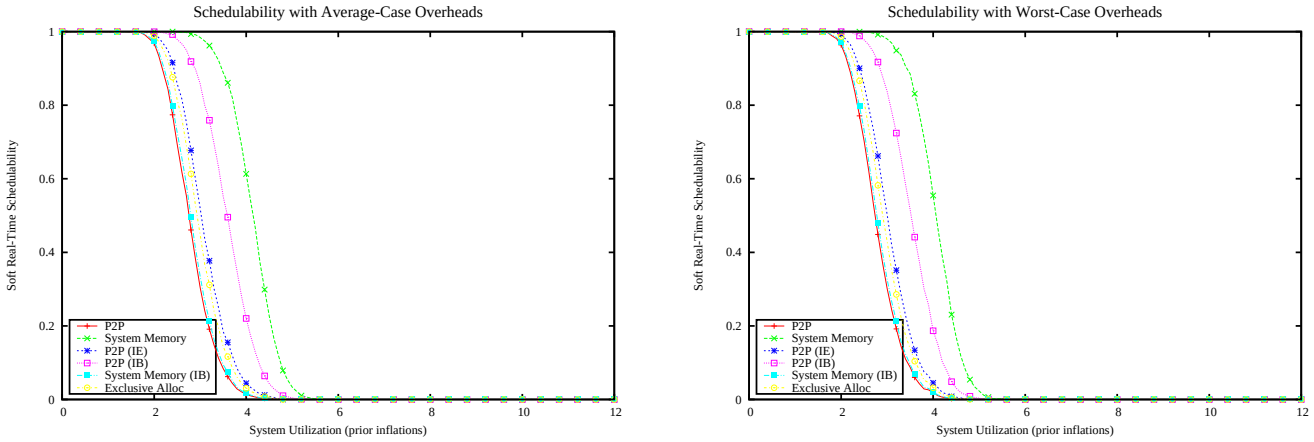

Figure 2442: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

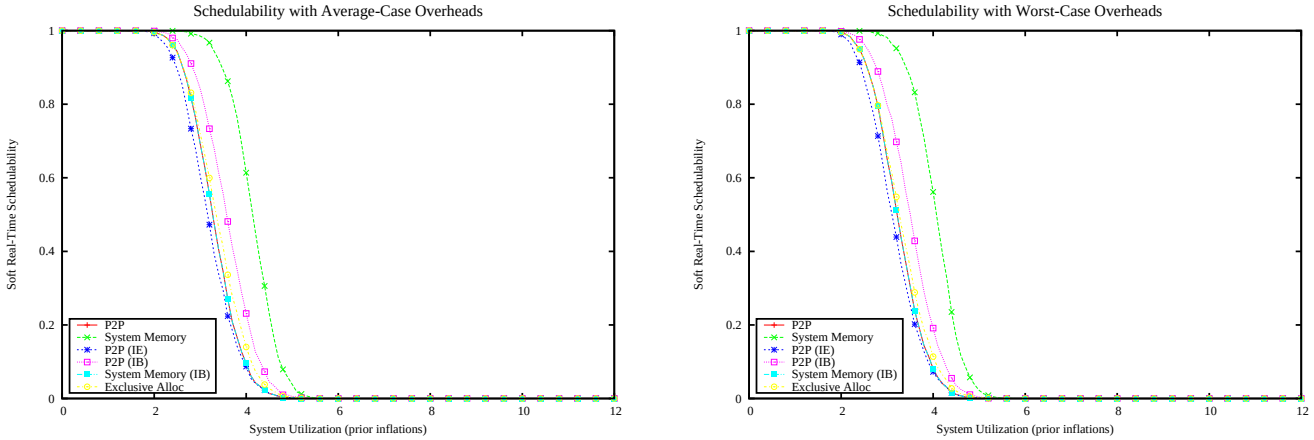

Figure 2443: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

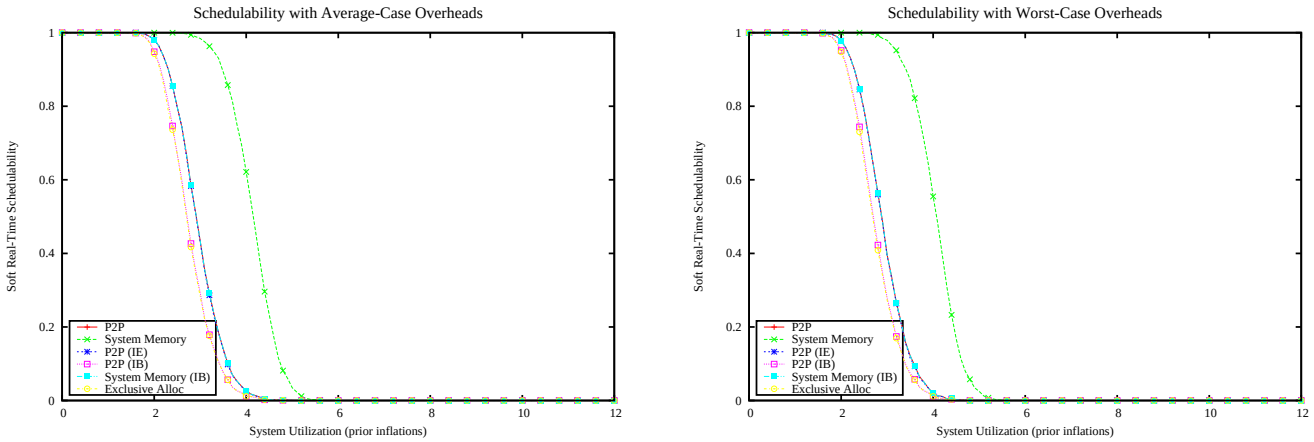

Figure 2444: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

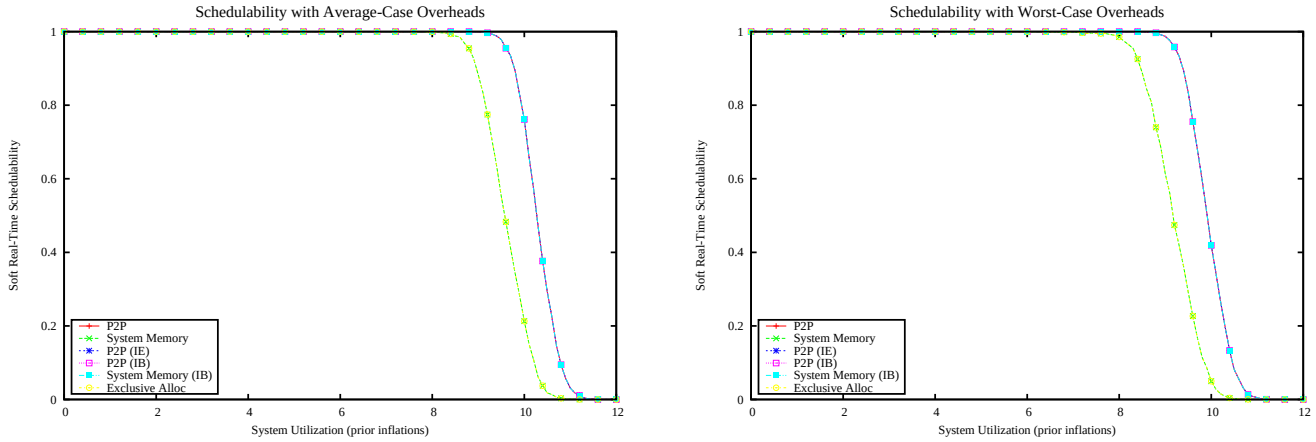

Figure 2445: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

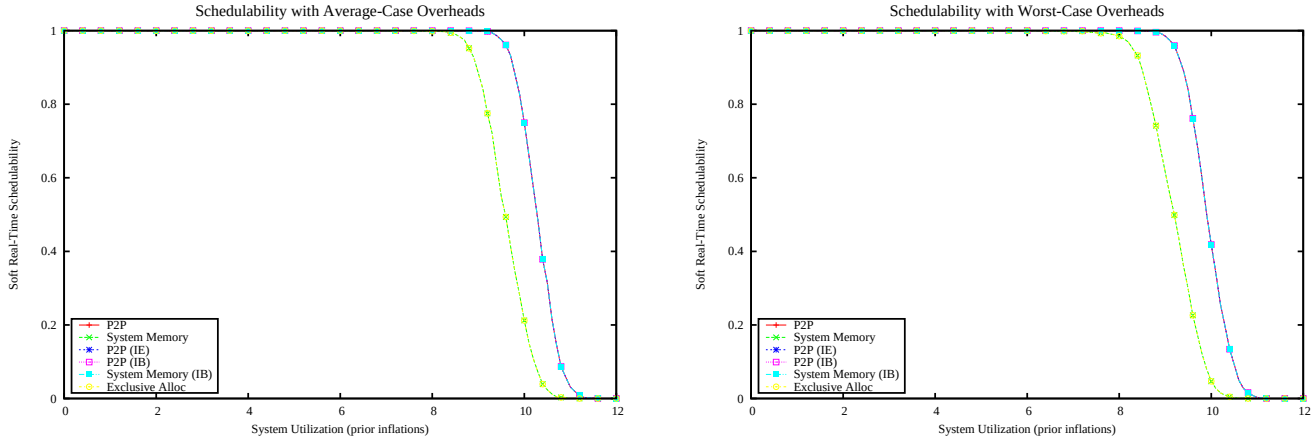

Figure 2446: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

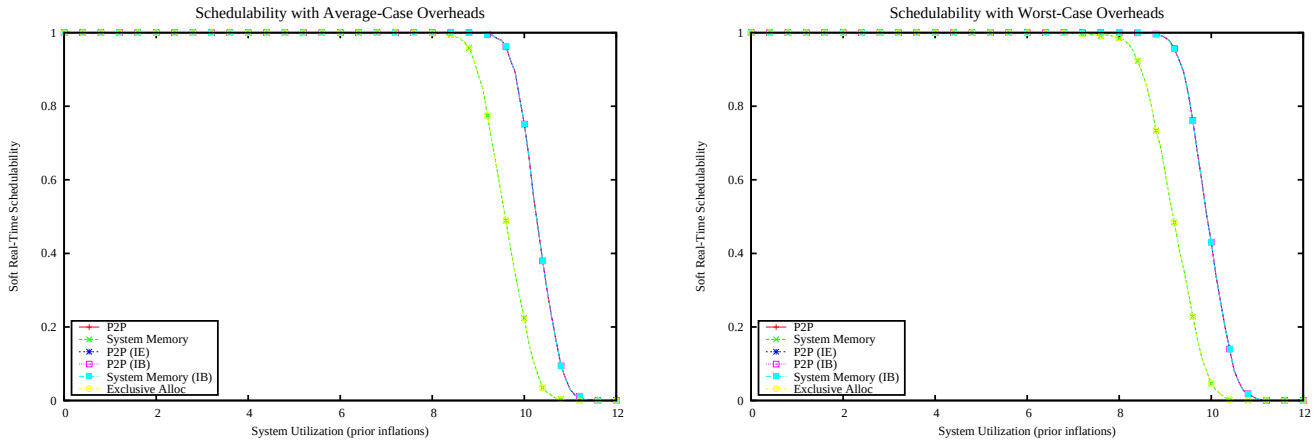

Figure 2447: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

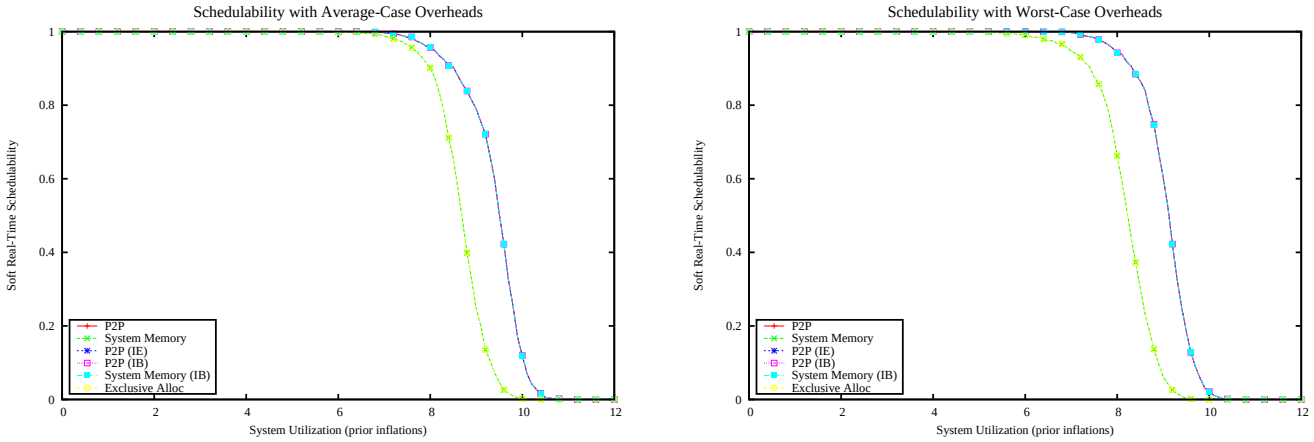

Figure 2448: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

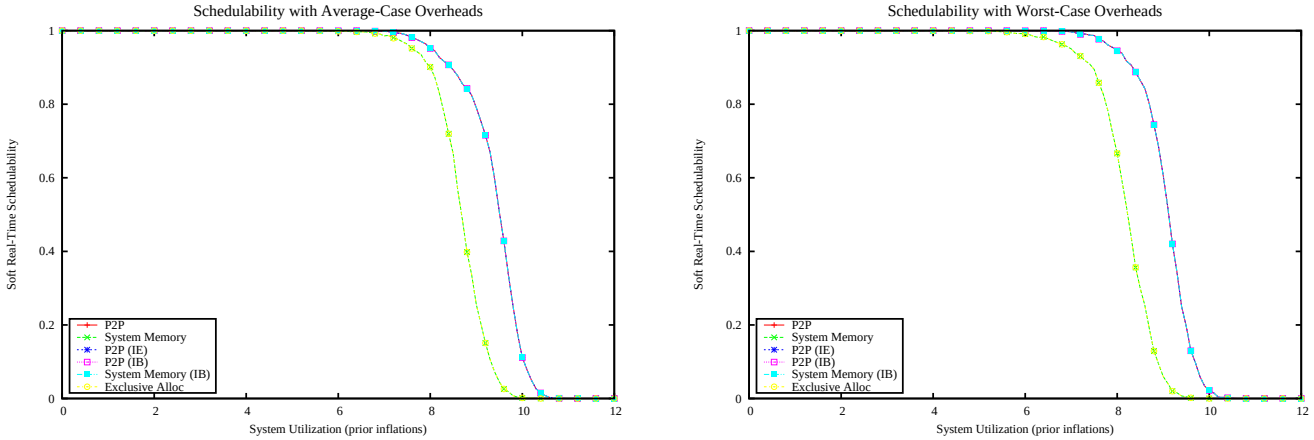

Figure 2449: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

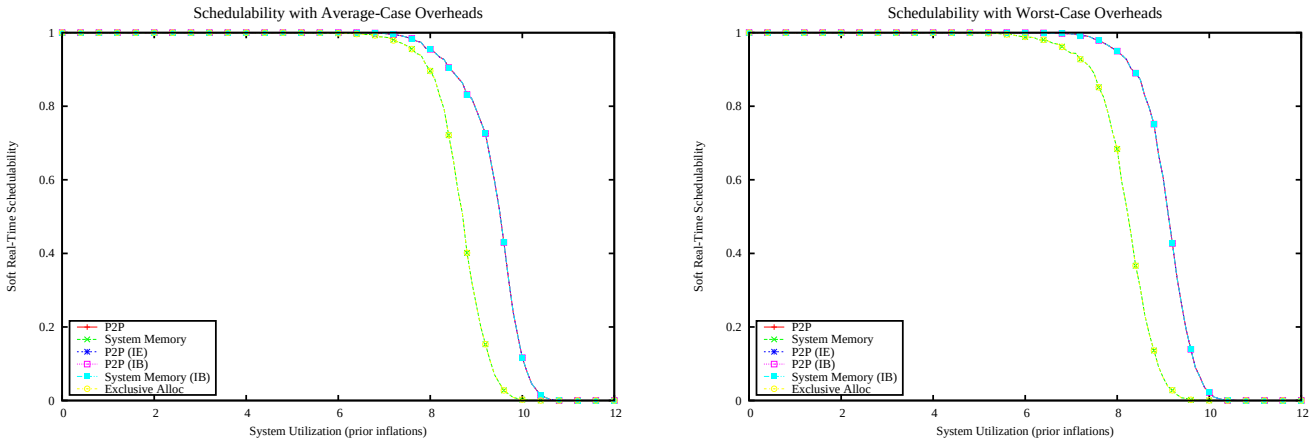

Figure 2450: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

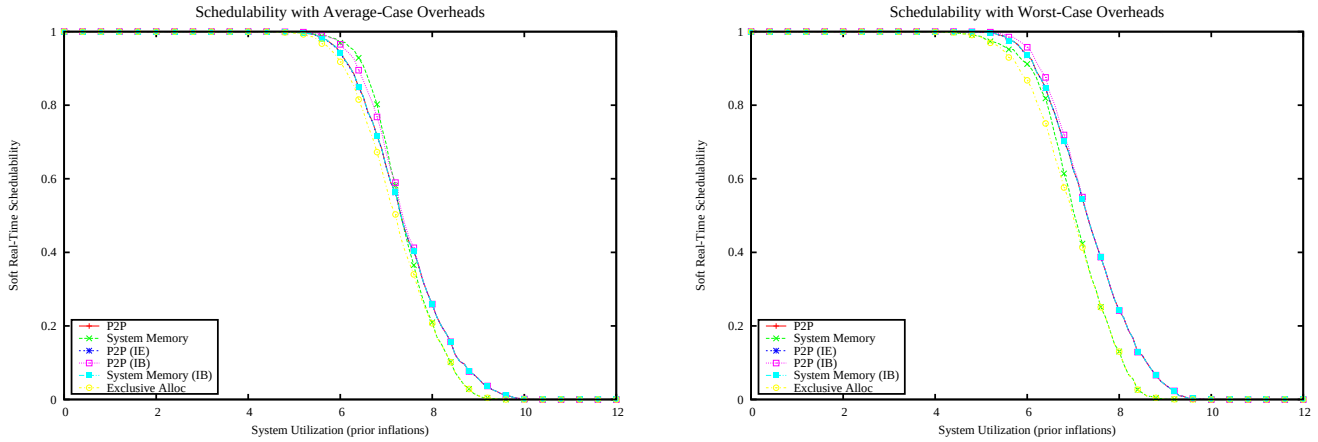

Figure 2451: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

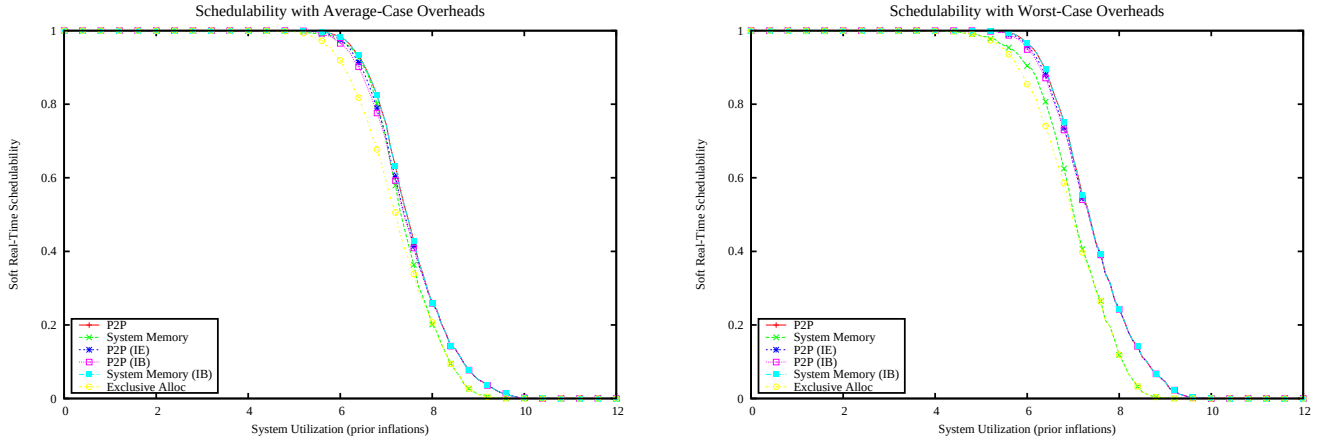

Figure 2452: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

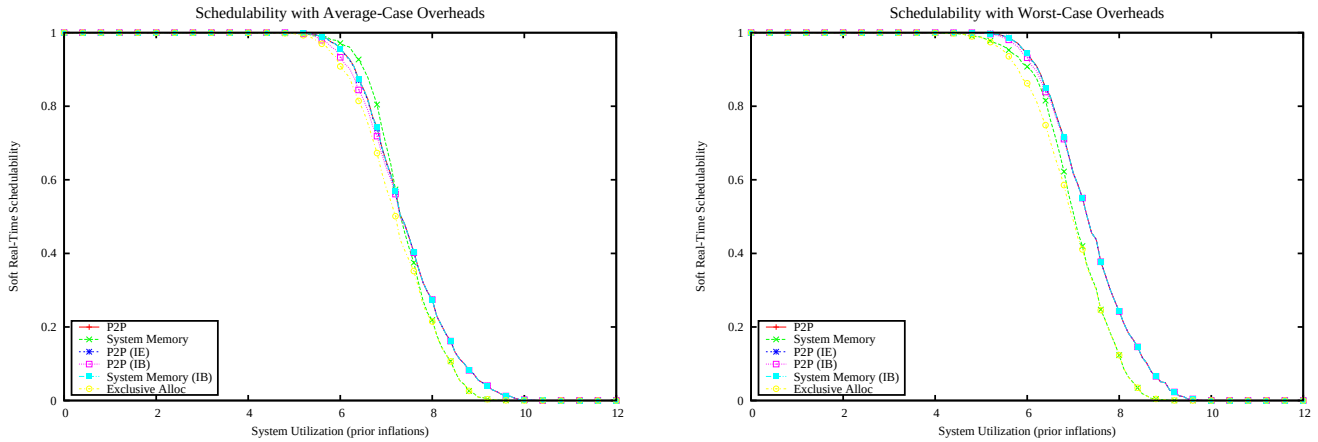

Figure 2453: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

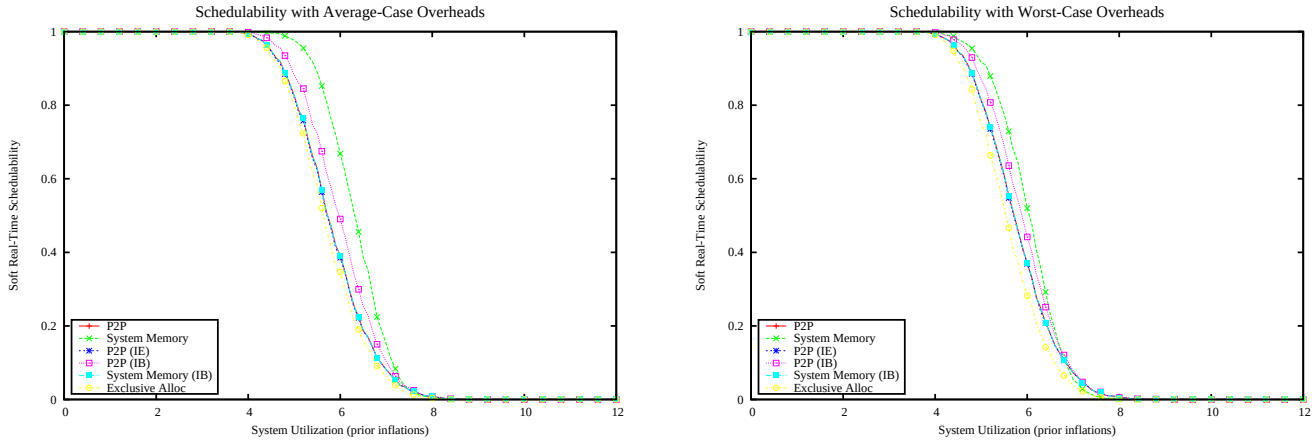

Figure 2454: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

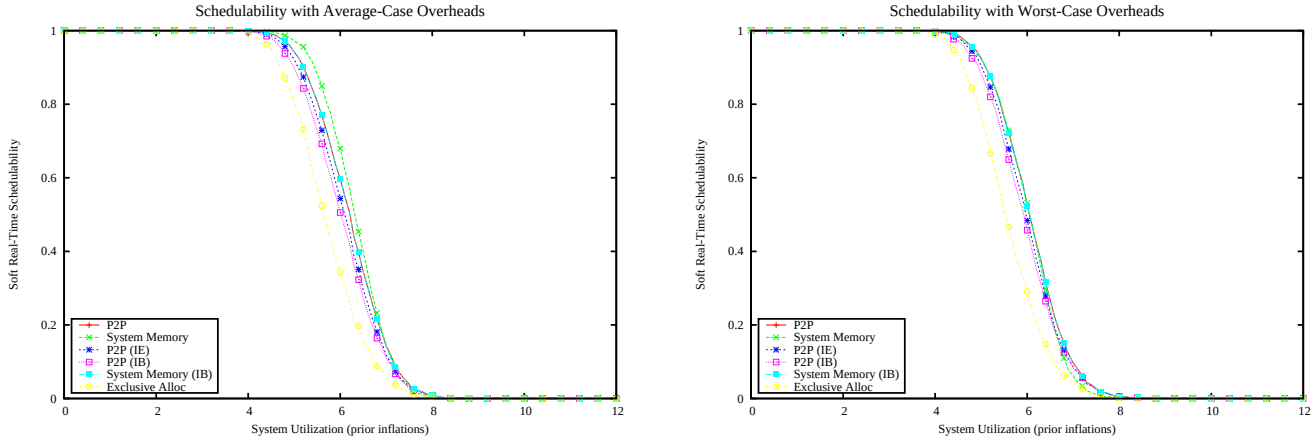

Figure 2455: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

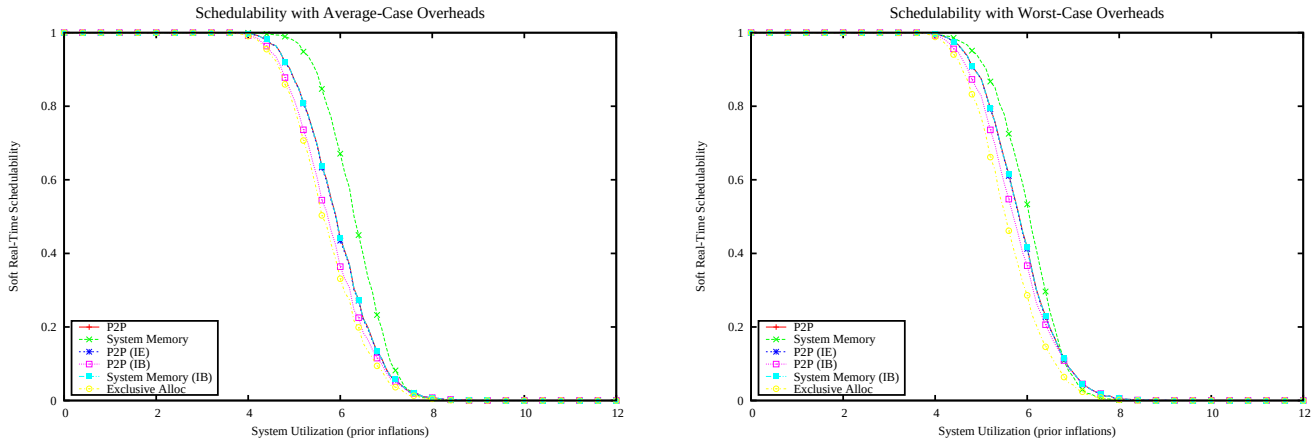

Figure 2456: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

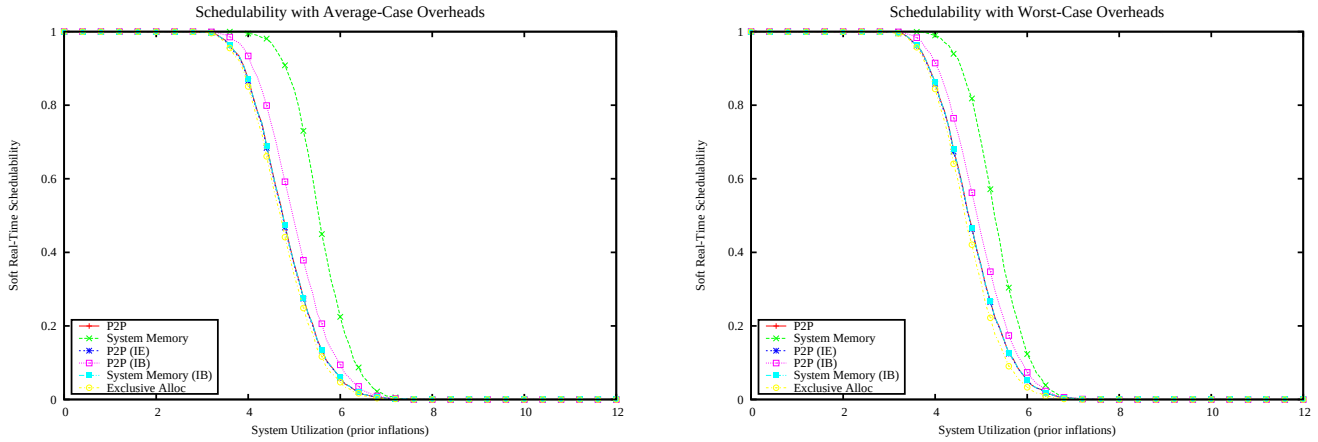

Figure 2457: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

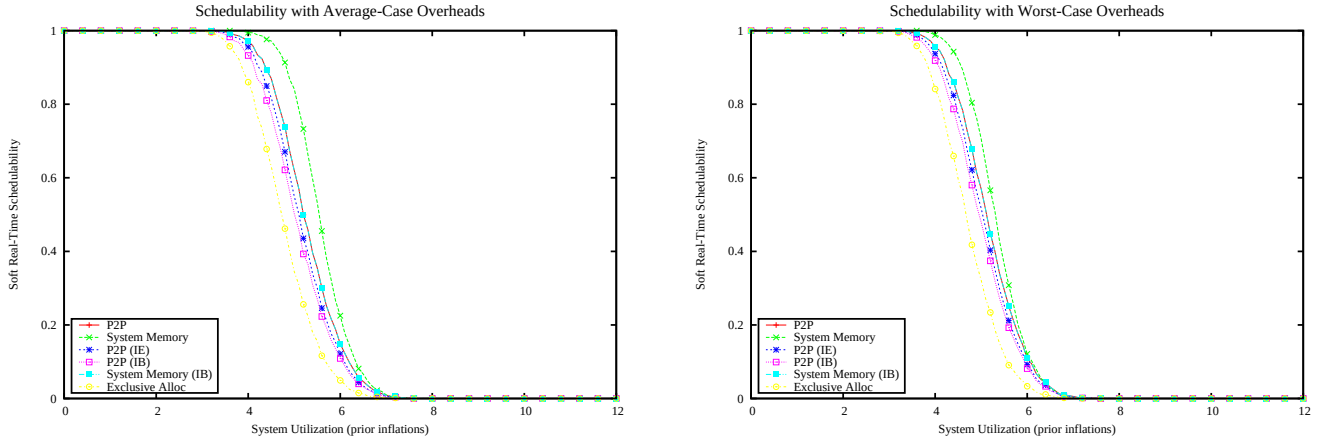

Figure 2458: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

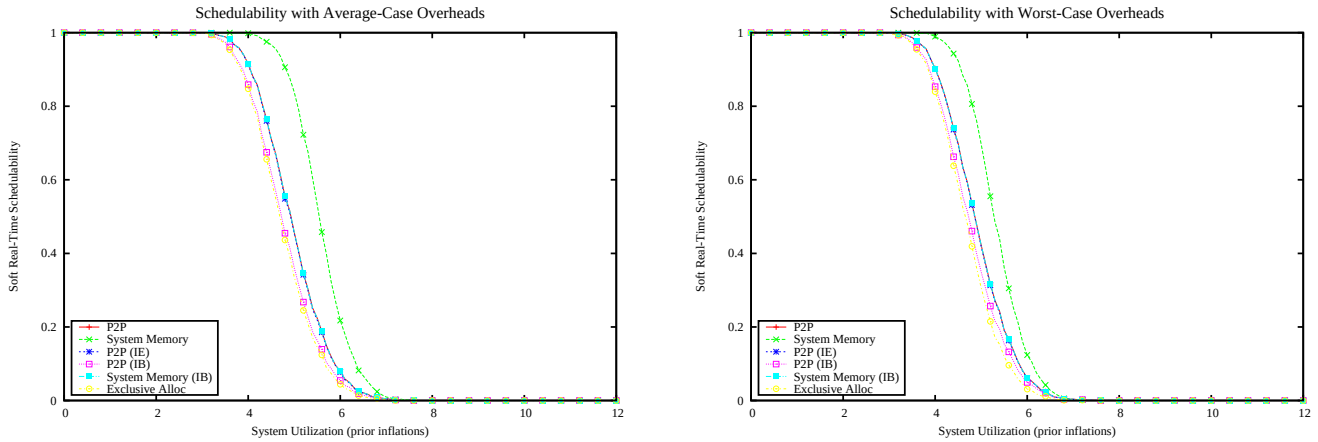

Figure 2459: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

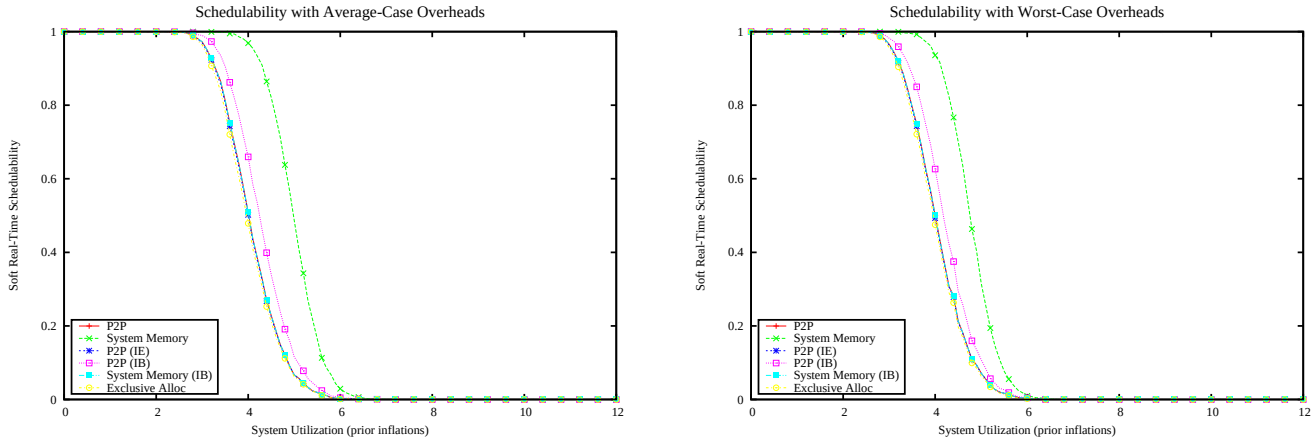

Figure 2460: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

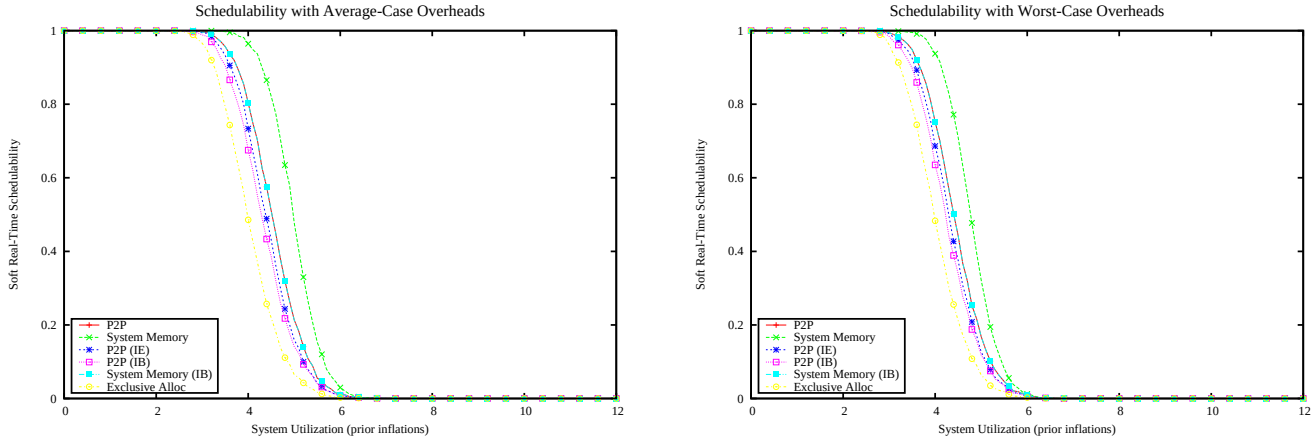

Figure 2461: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

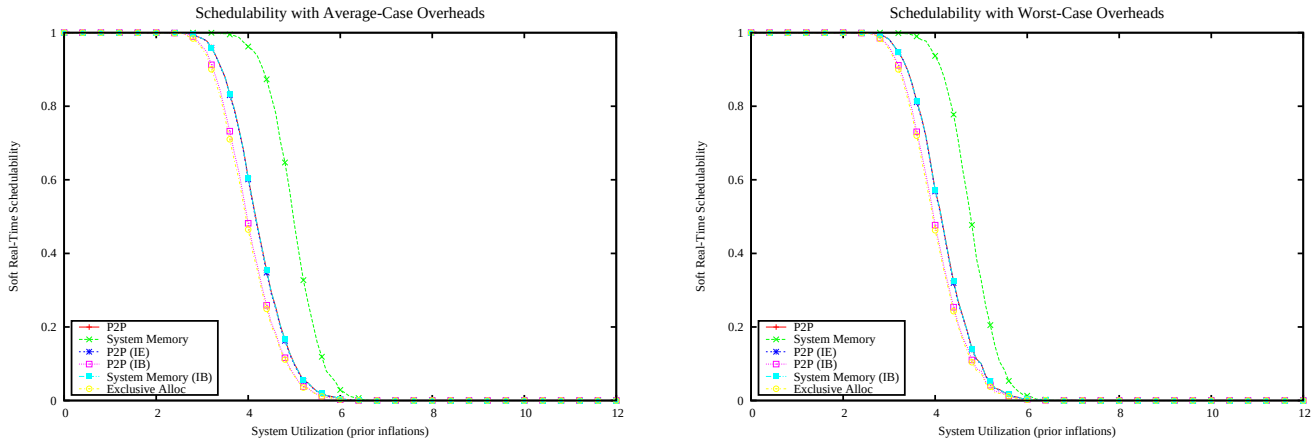

Figure 2462: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

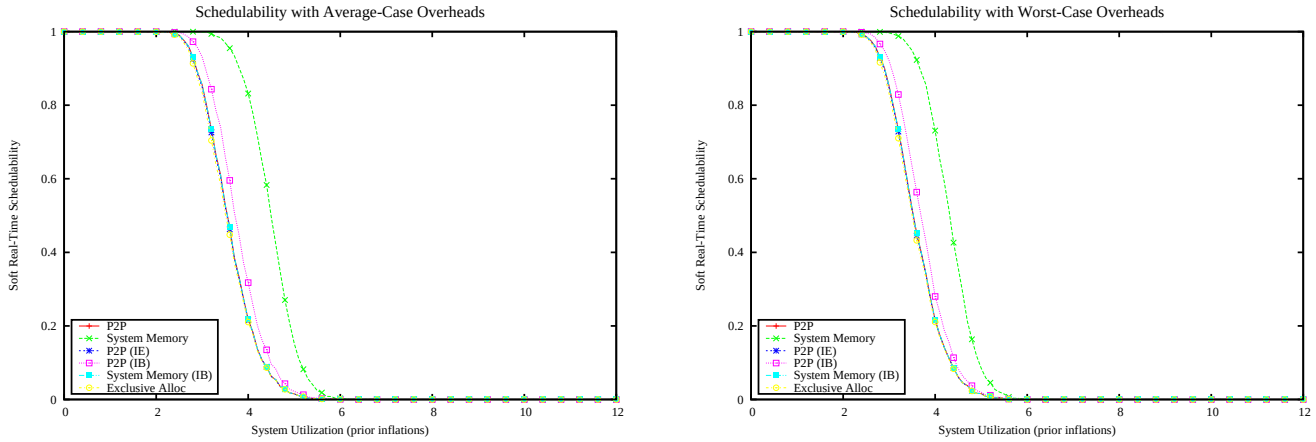

Figure 2463: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

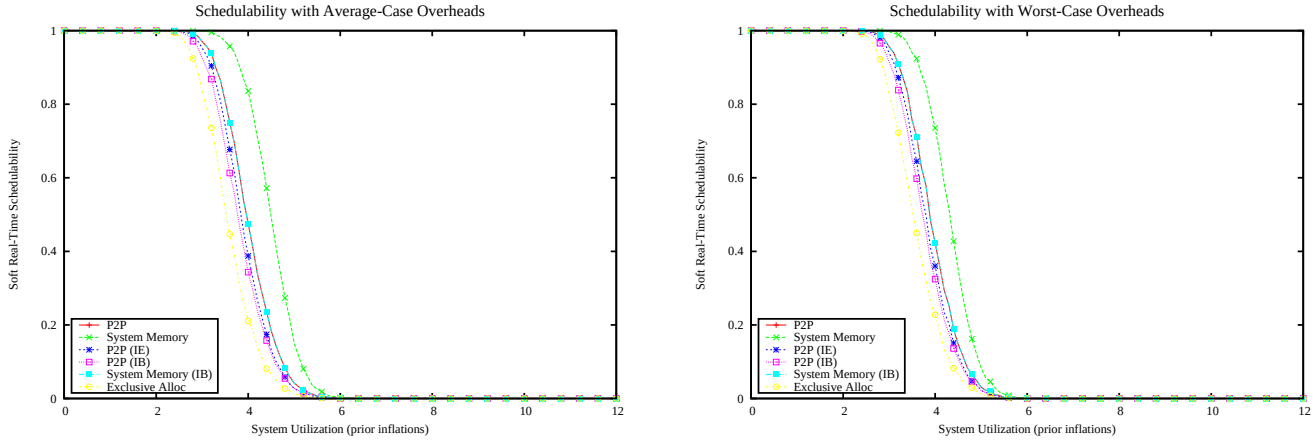

Figure 2464: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

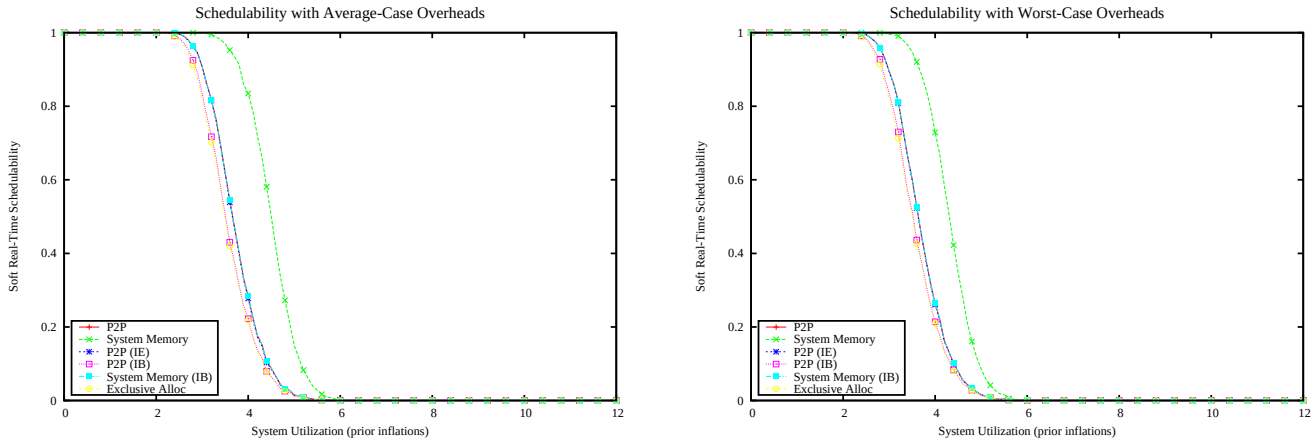

Figure 2465: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

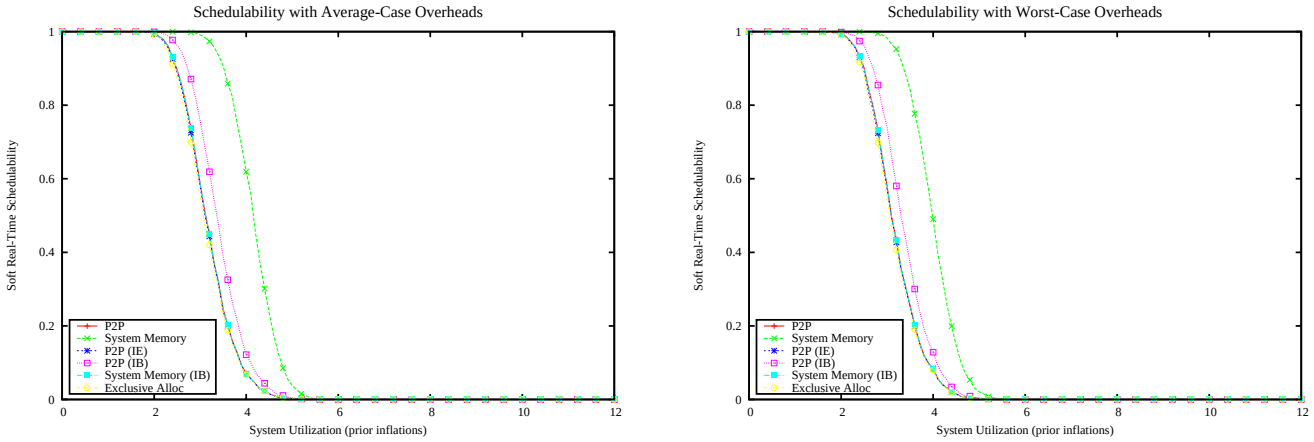

Figure 2466: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

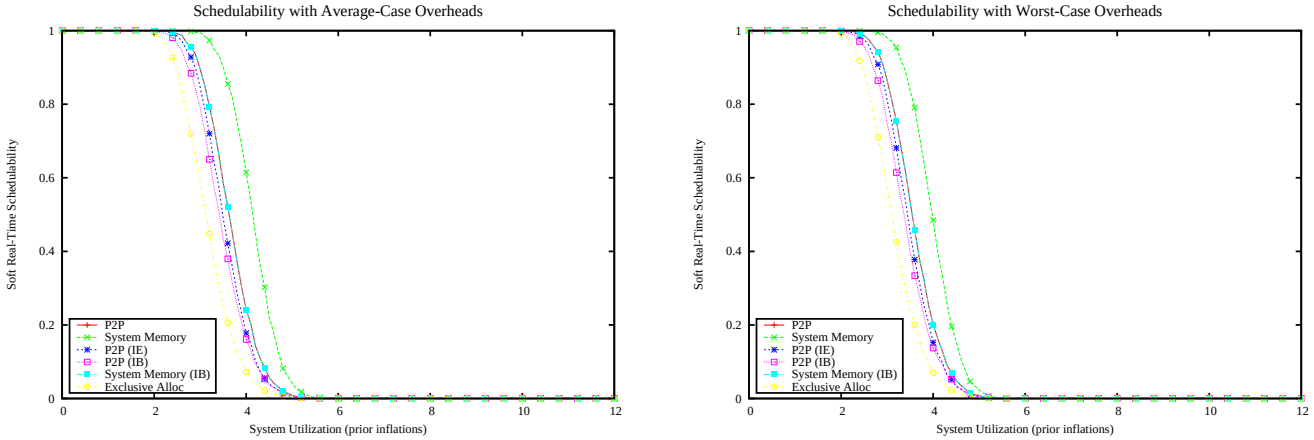

Figure 2467: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

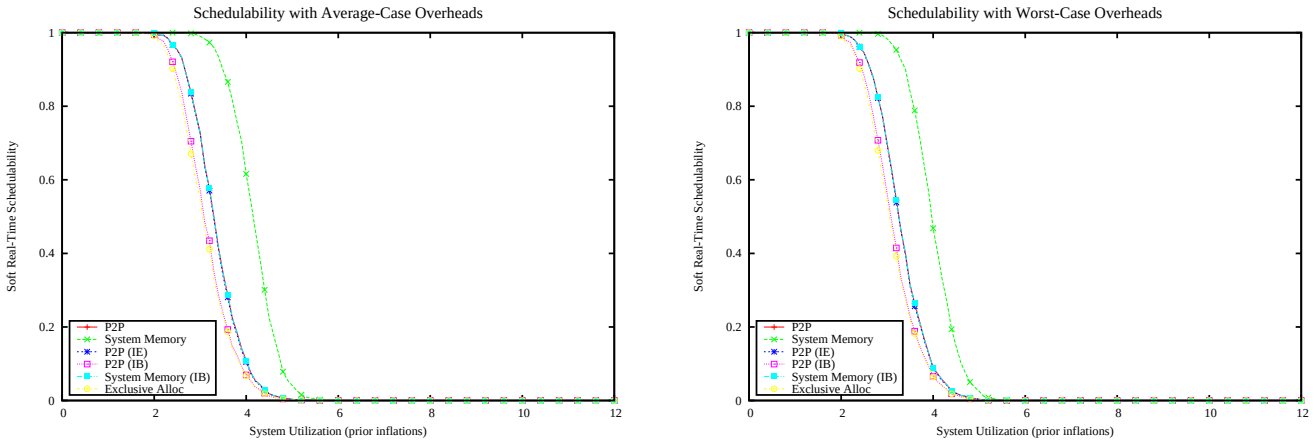

Figure 2468: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

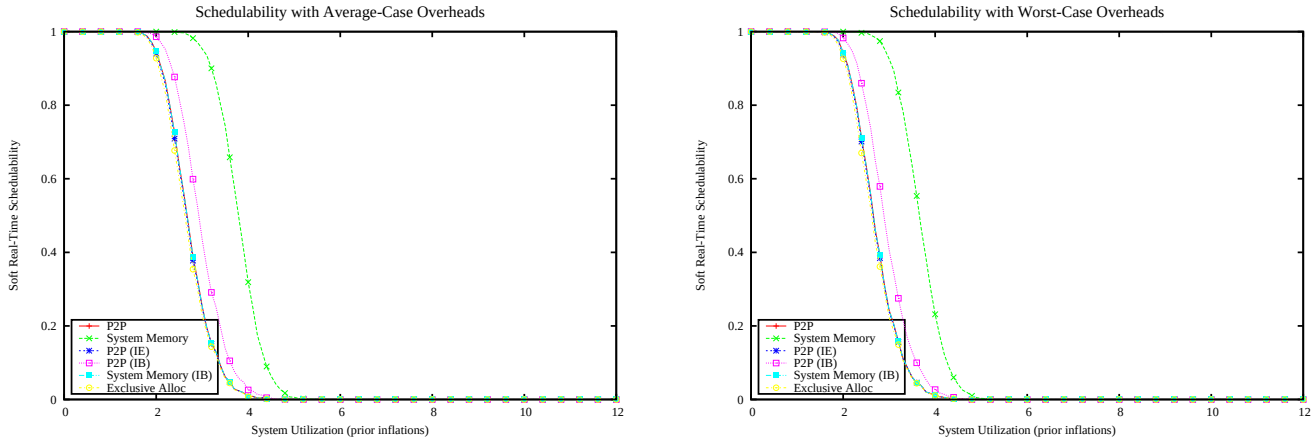

Figure 2469: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

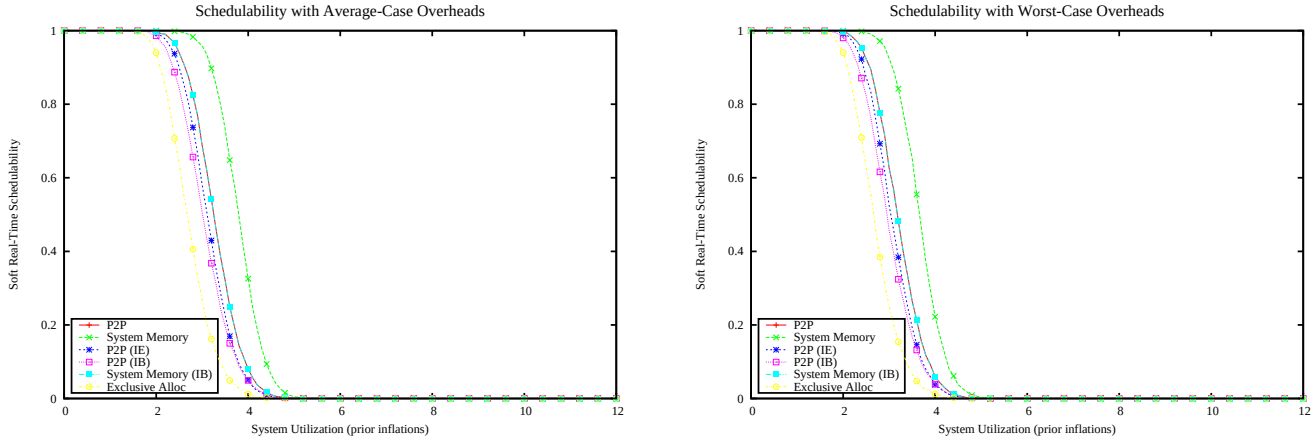

Figure 2470: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

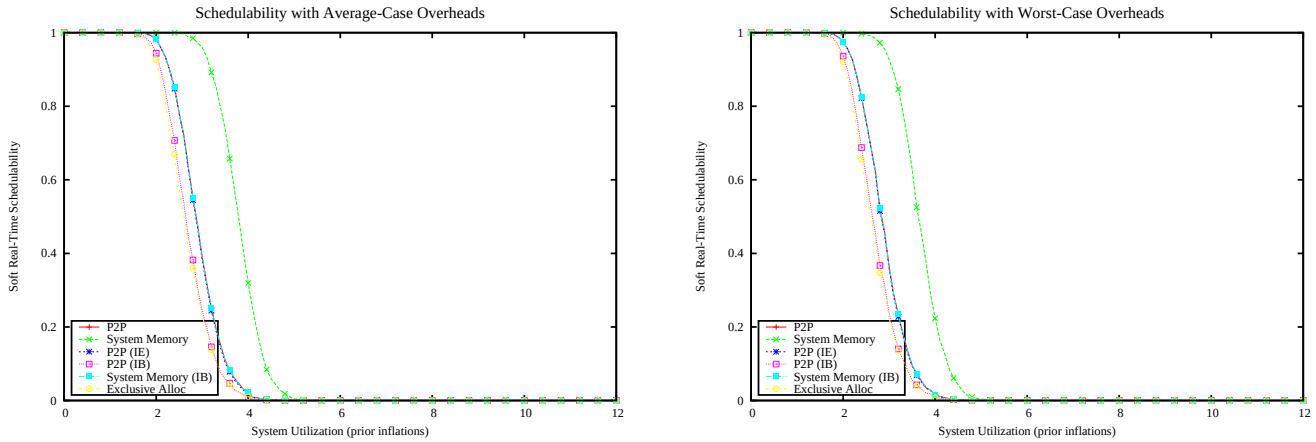

Figure 2471: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

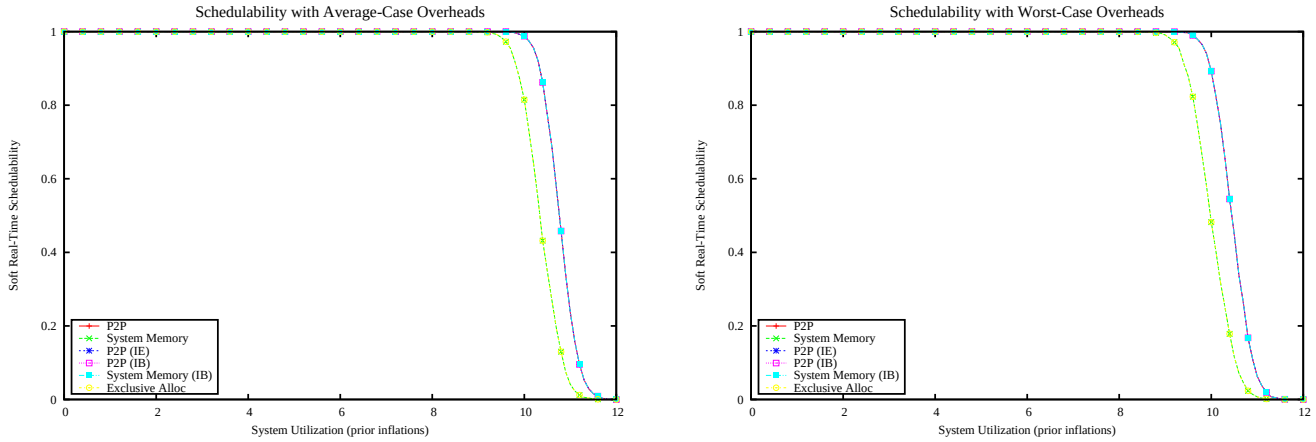

Figure 2472: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

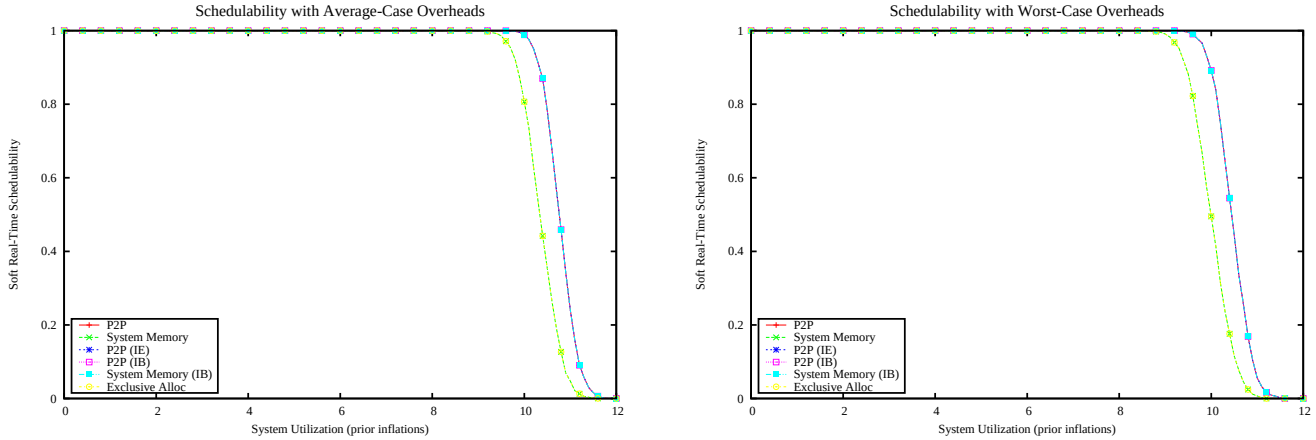

Figure 2473: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

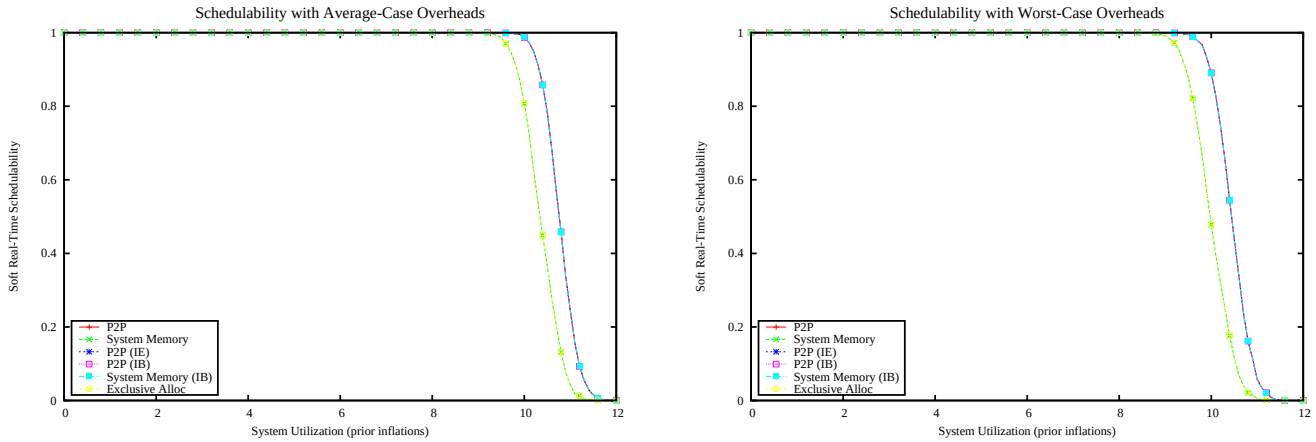

Figure 2474: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

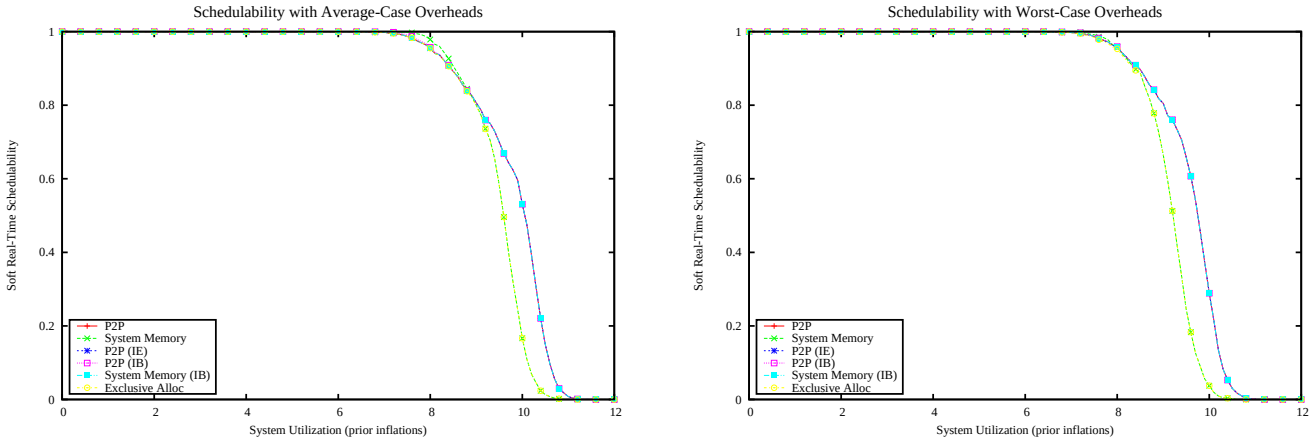

Figure 2475: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

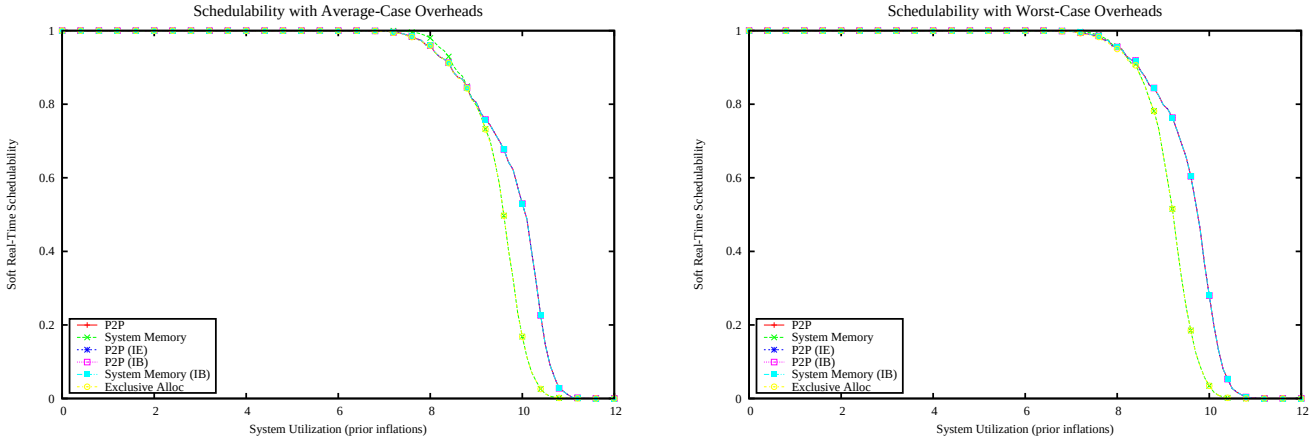

Figure 2476: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

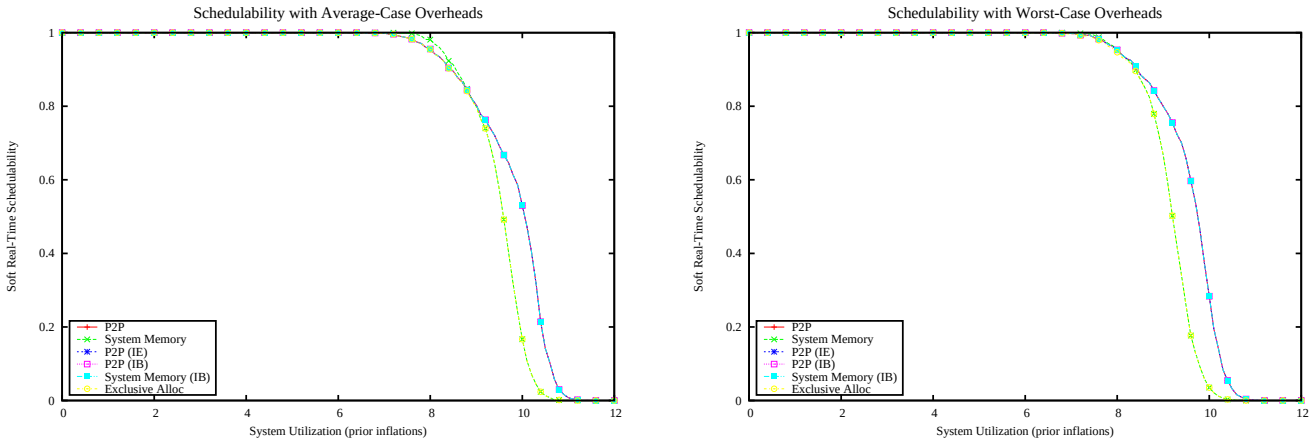

Figure 2477: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

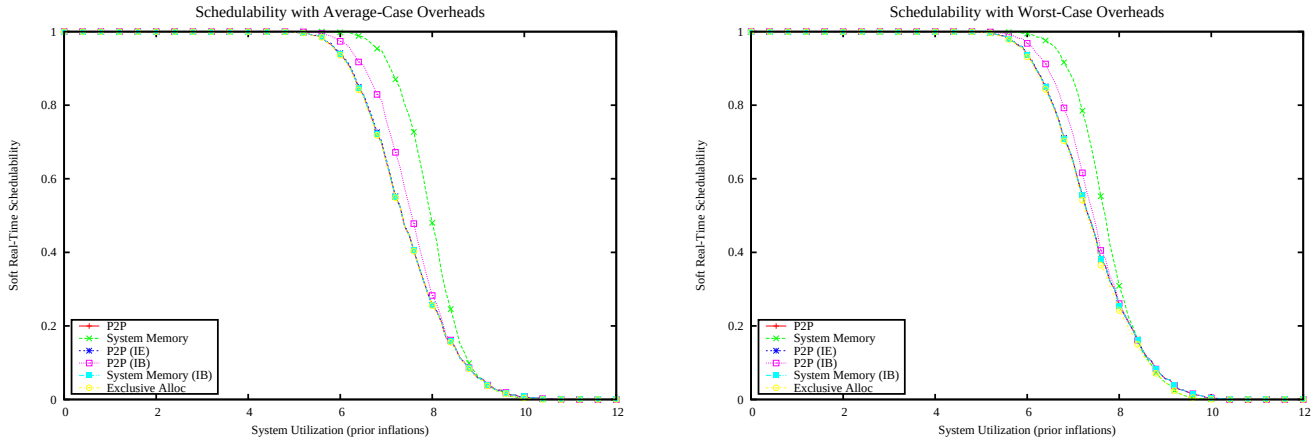

Figure 2478: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

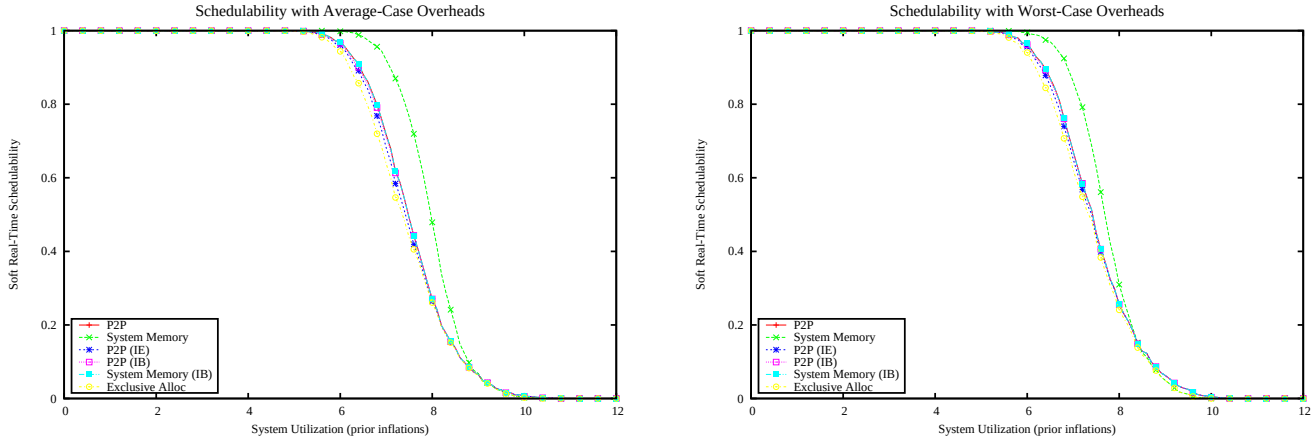

Figure 2479: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

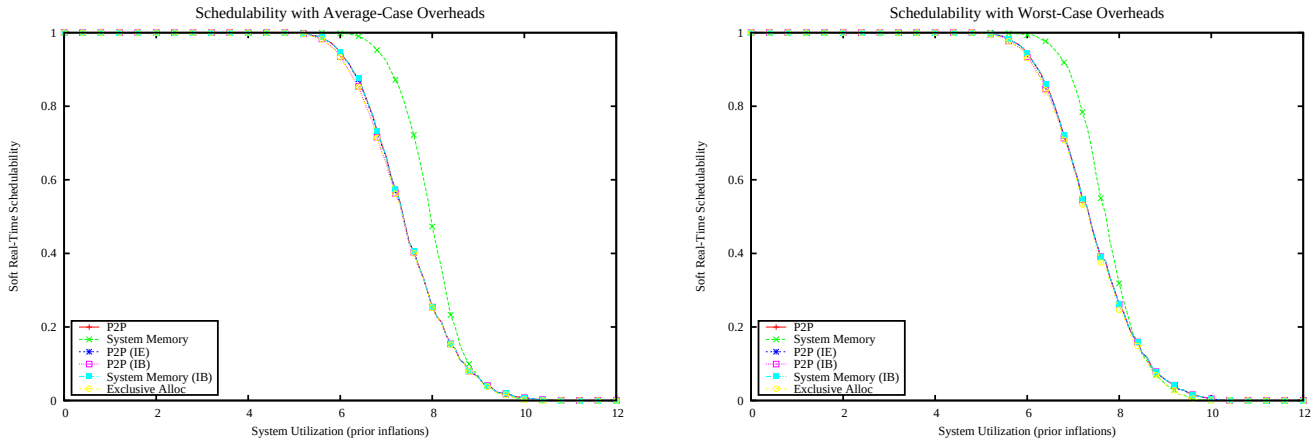

Figure 2480: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

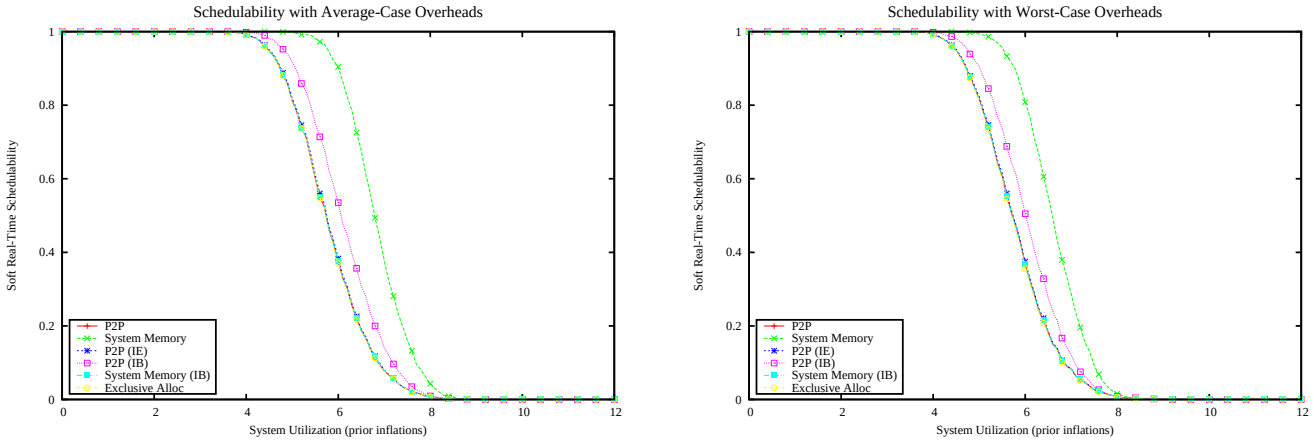

Figure 2481: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

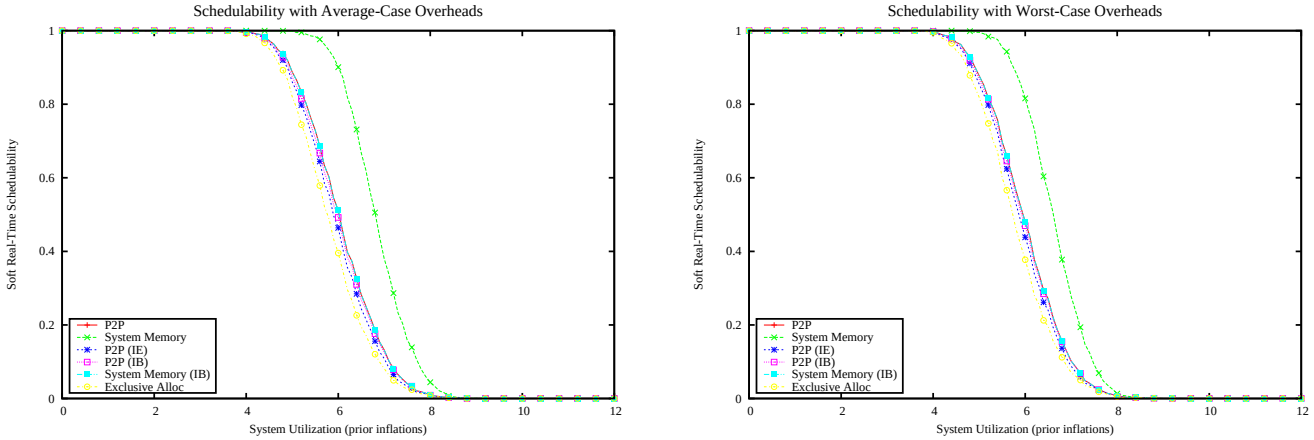

Figure 2482: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

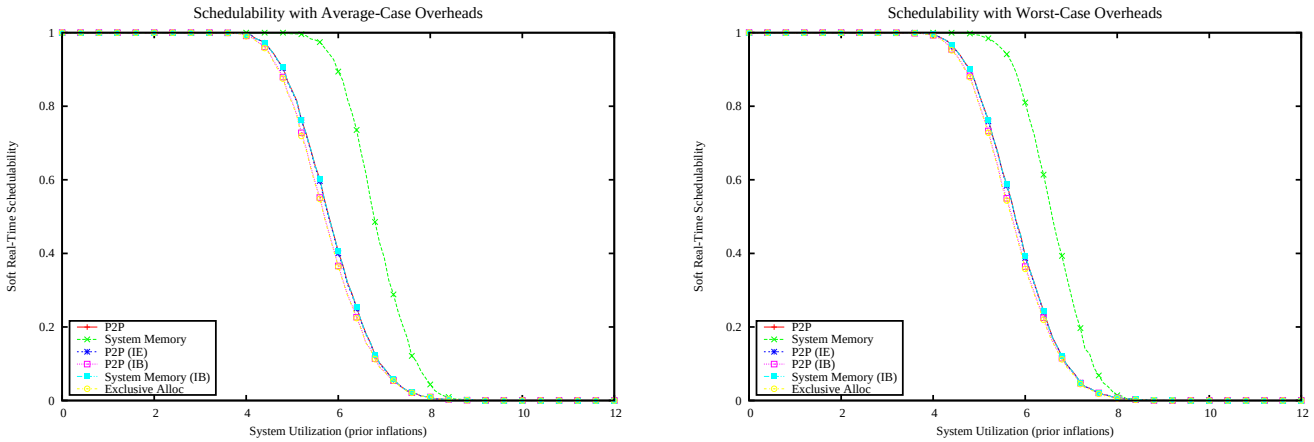

Figure 2483: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

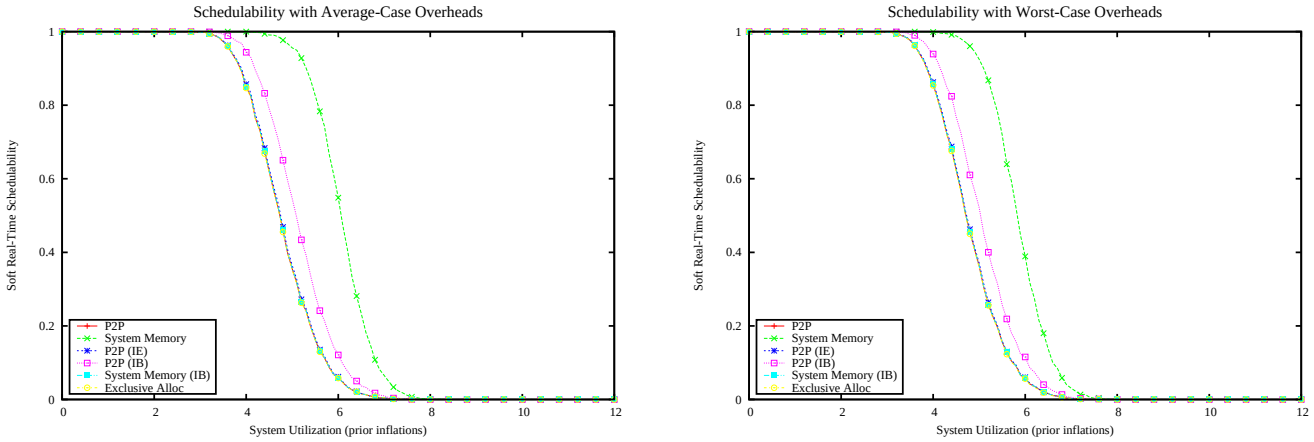

Figure 2484: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

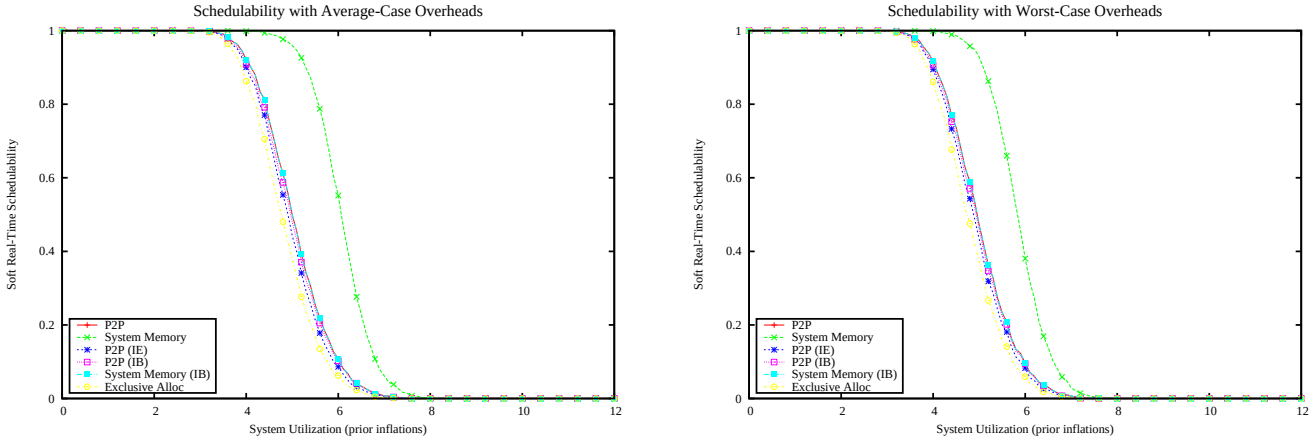

Figure 2485: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

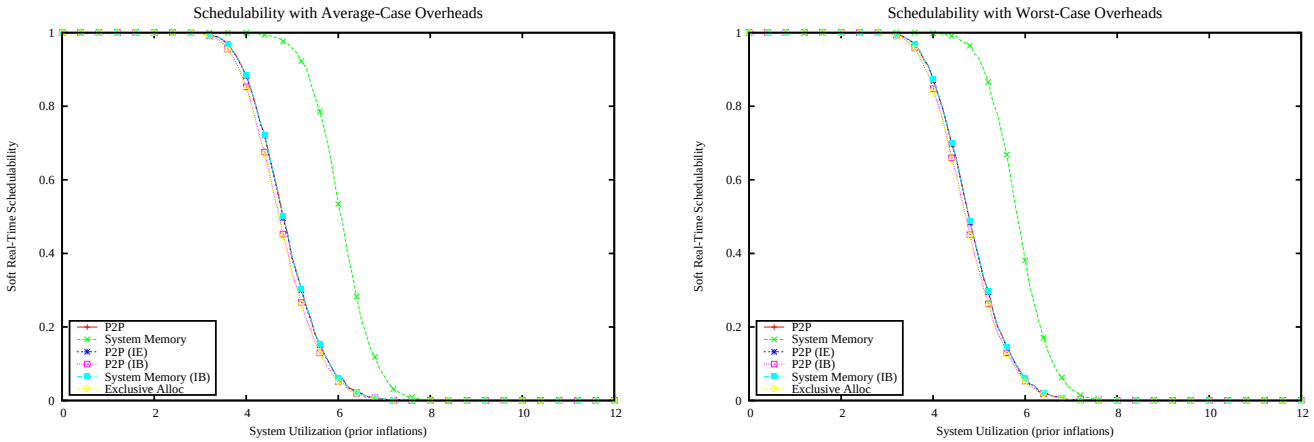

Figure 2486: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

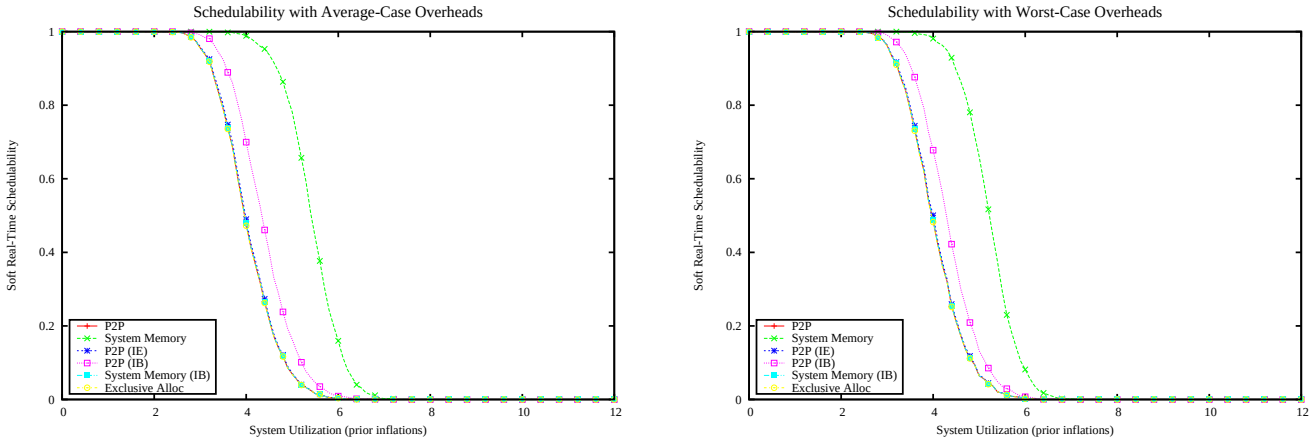

Figure 2487: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

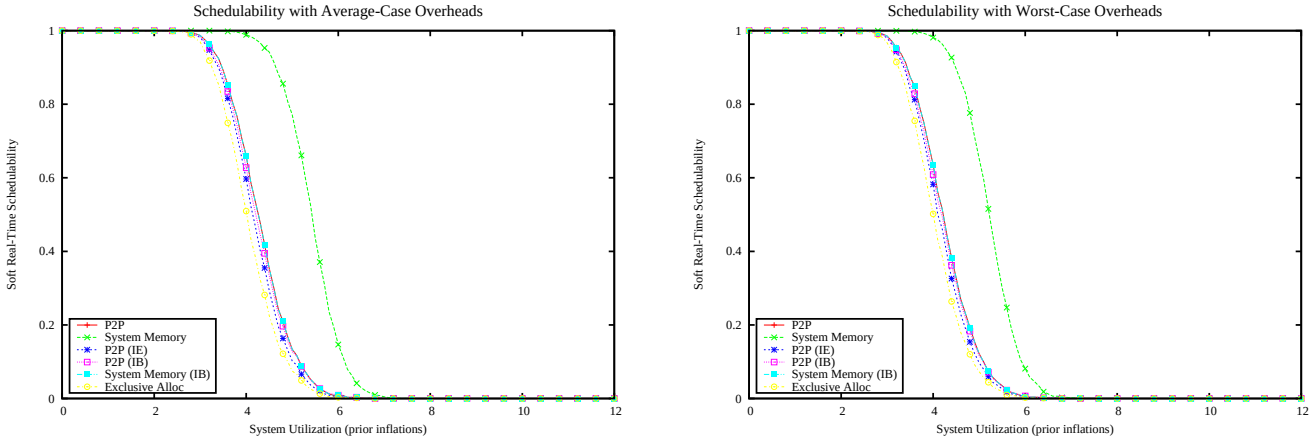

Figure 2488: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

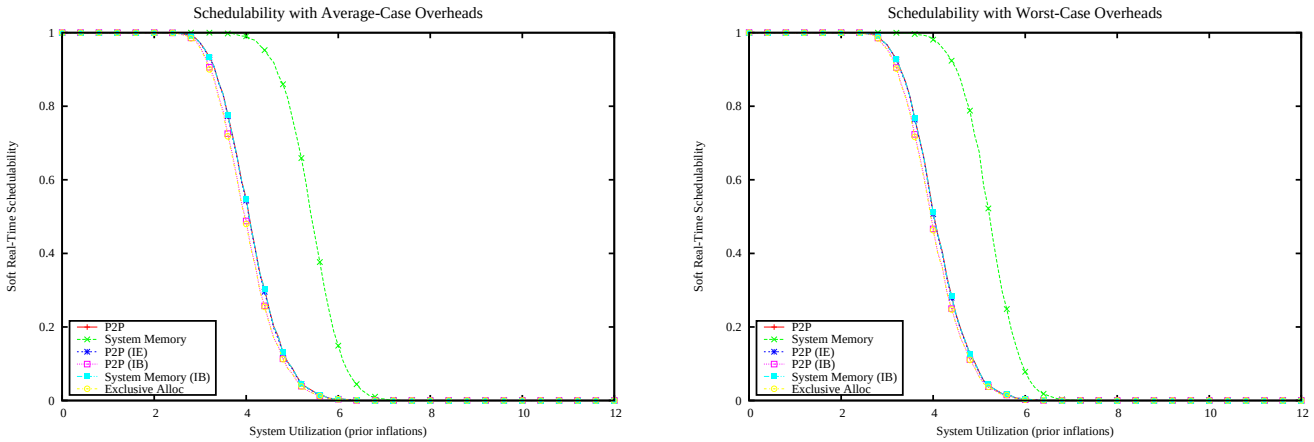

Figure 2489: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

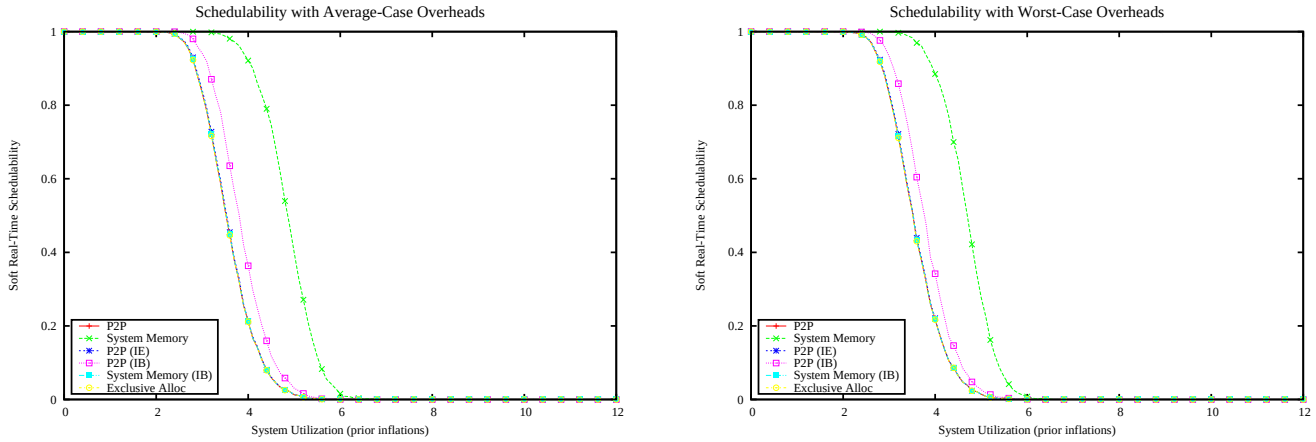

Figure 2490: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

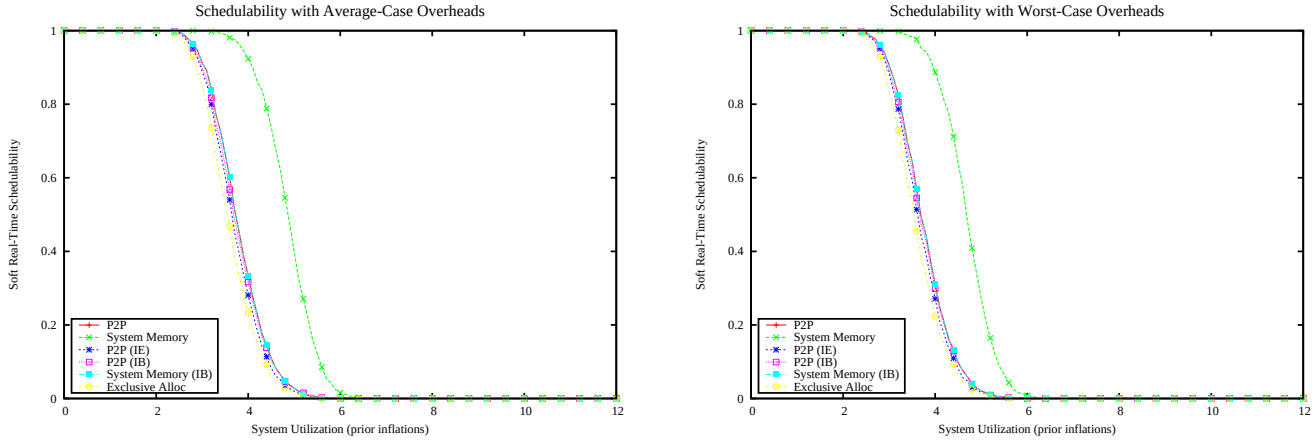

Figure 2491: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

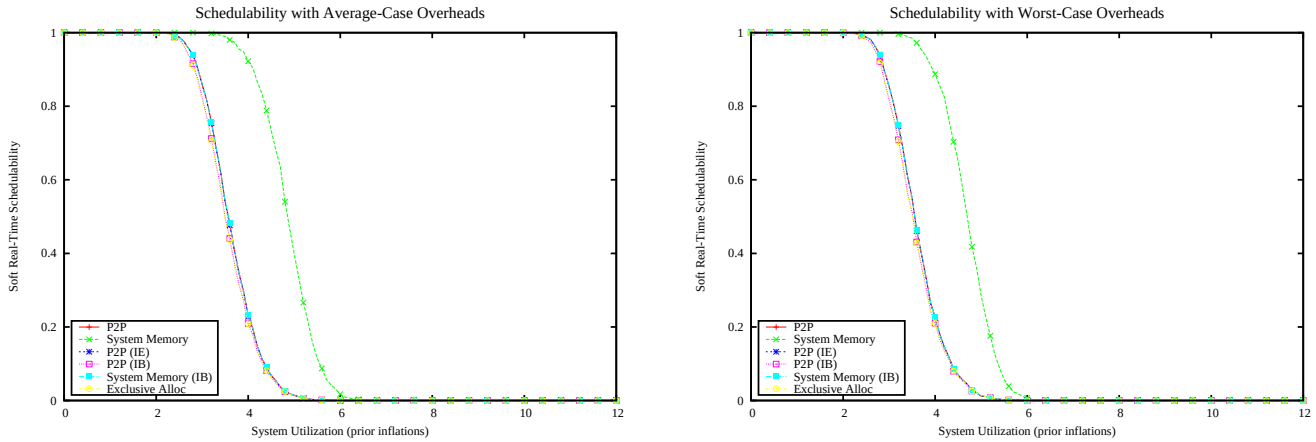

Figure 2492: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

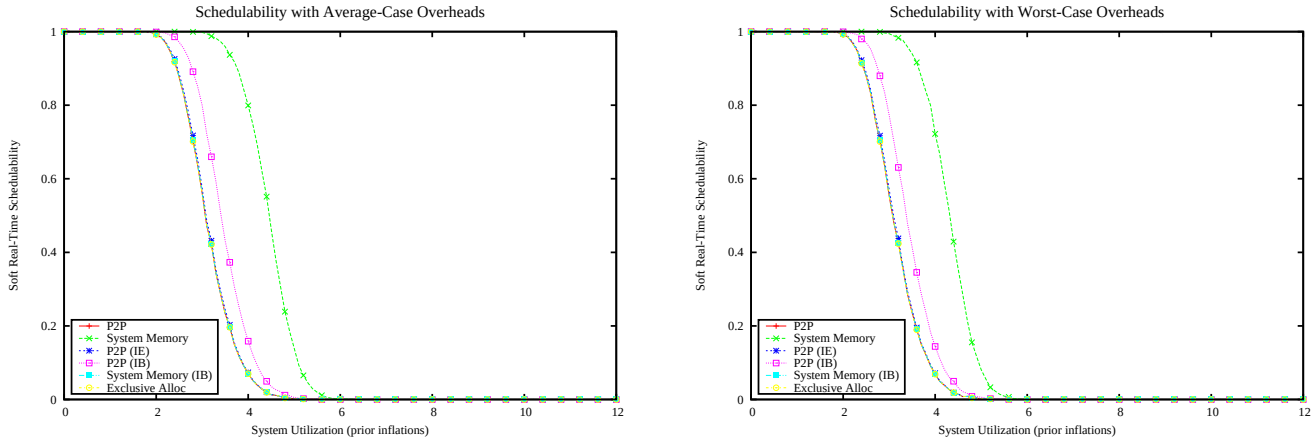

Figure 2493: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

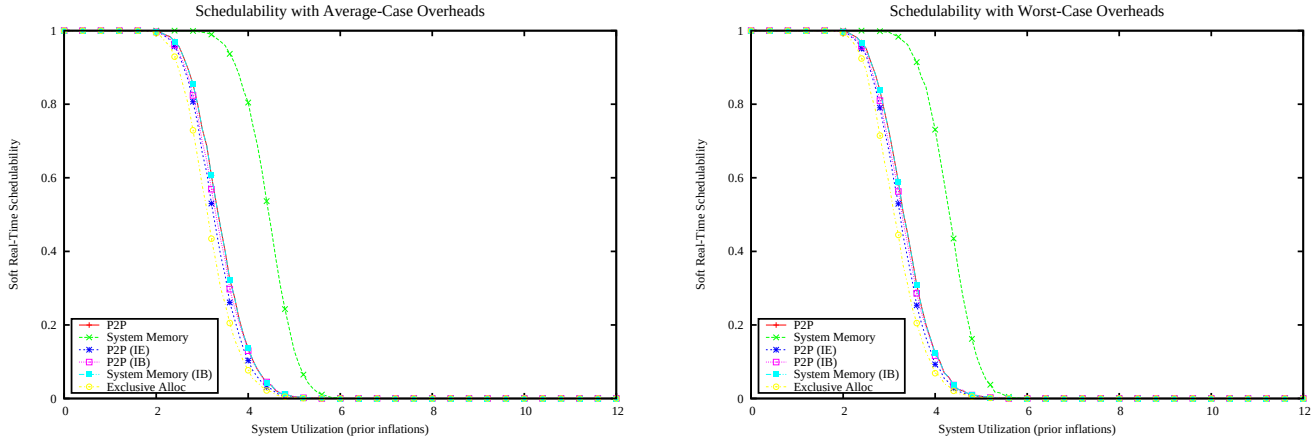

Figure 2494: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

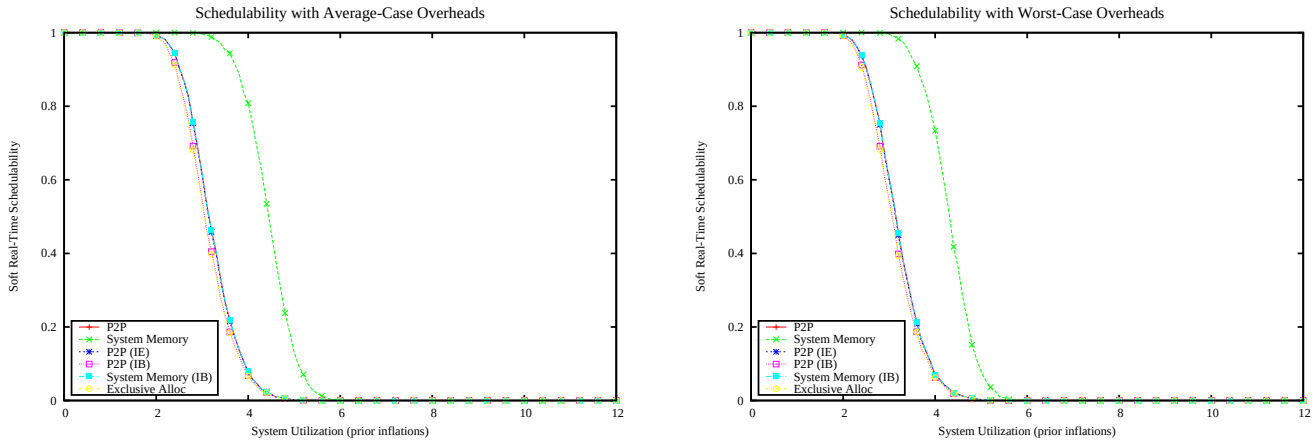

Figure 2495: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

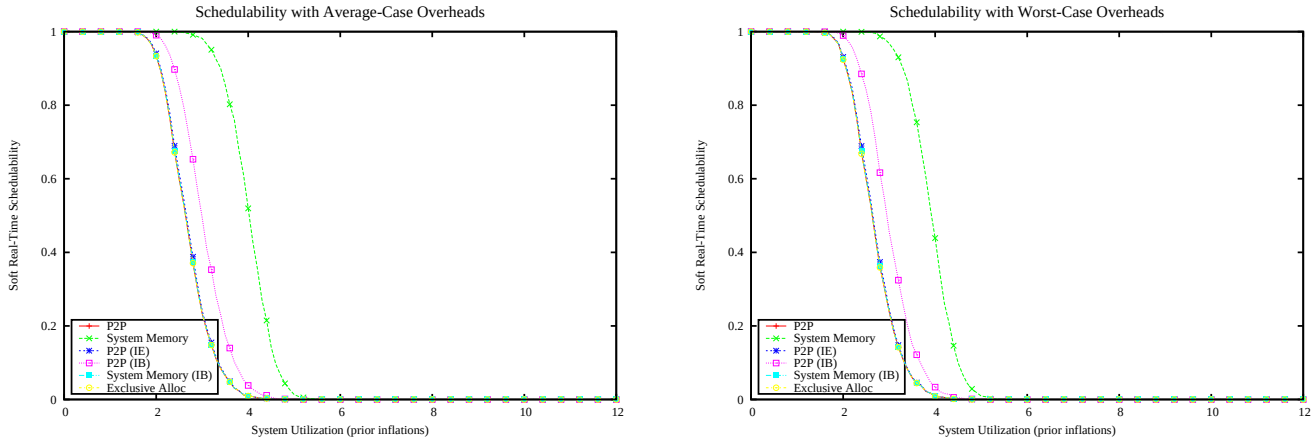

Figure 2496: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

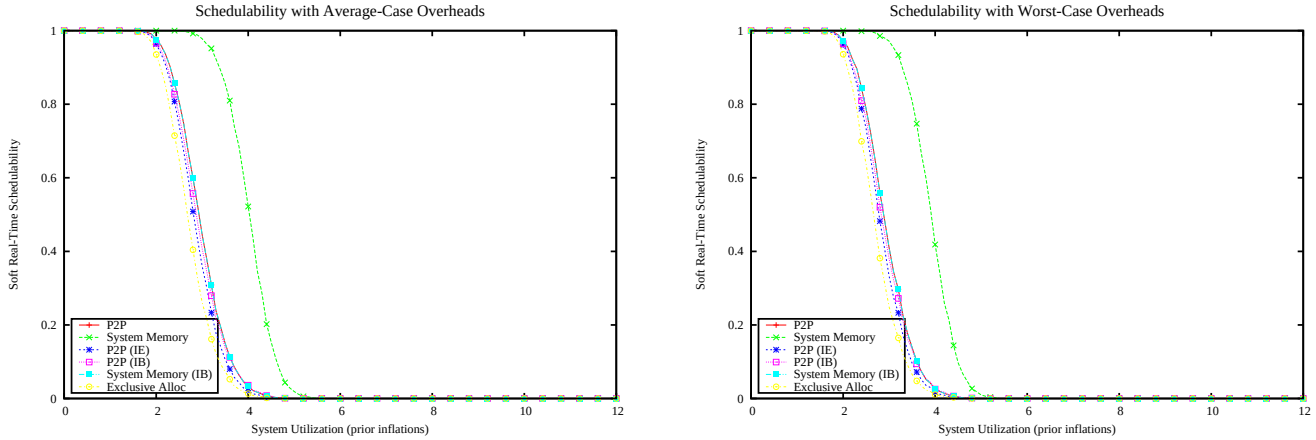

Figure 2497: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

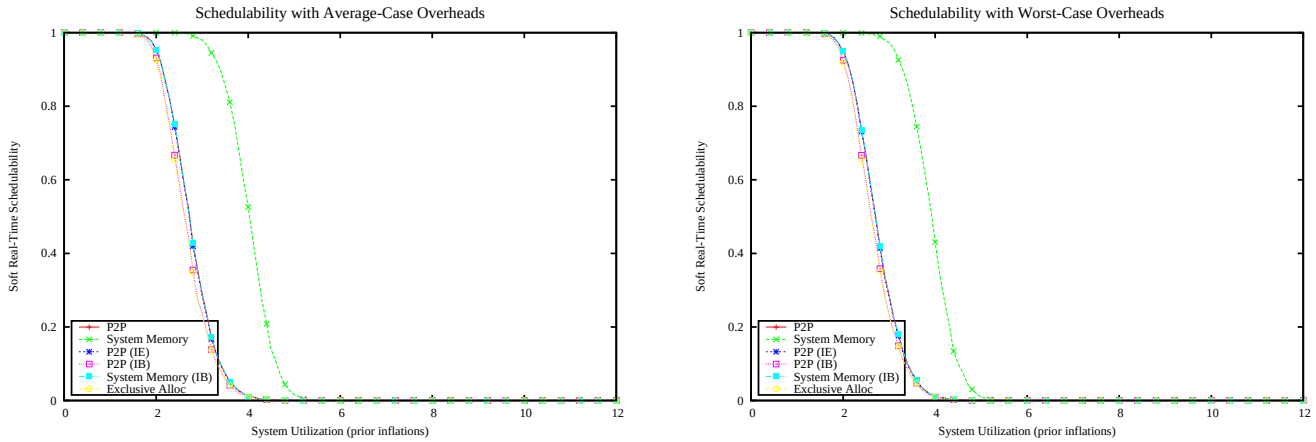

Figure 2498: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

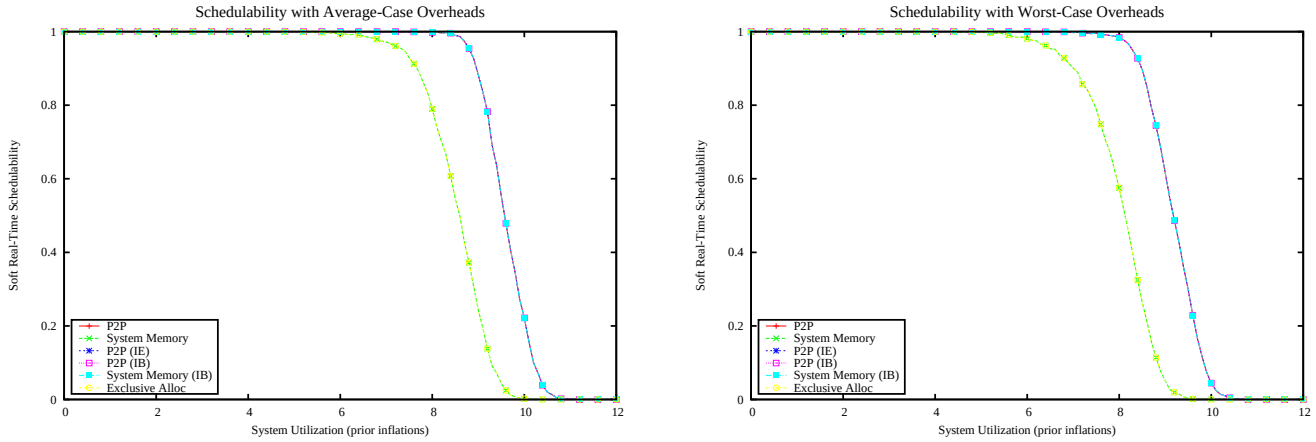

Figure 2499: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

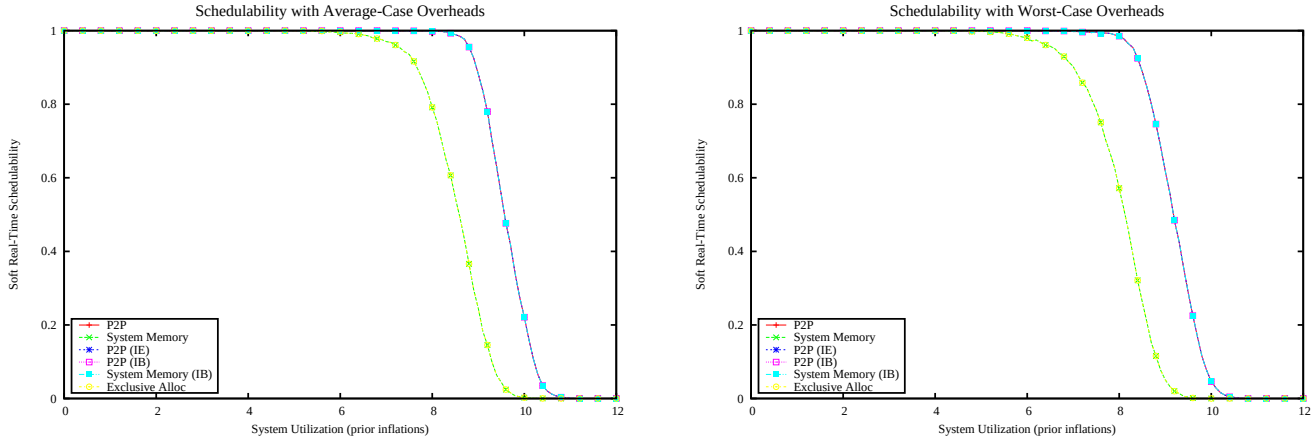

Figure 2500: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

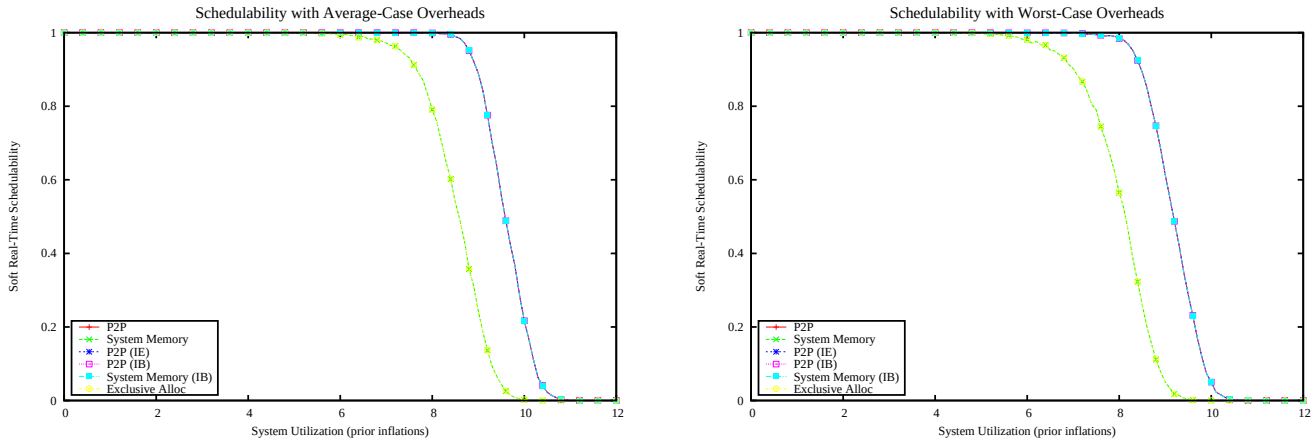

Figure 2501: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

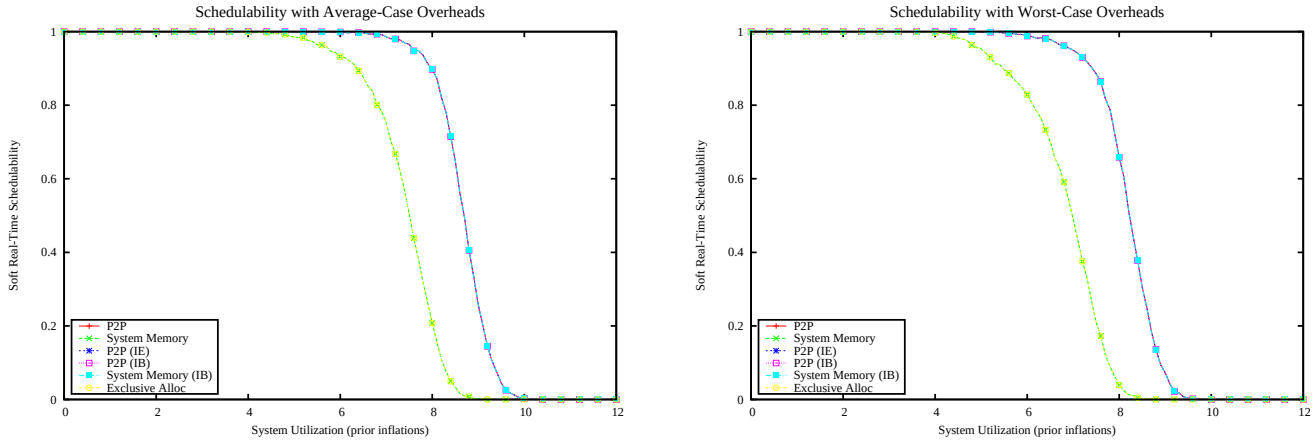

Figure 2502: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

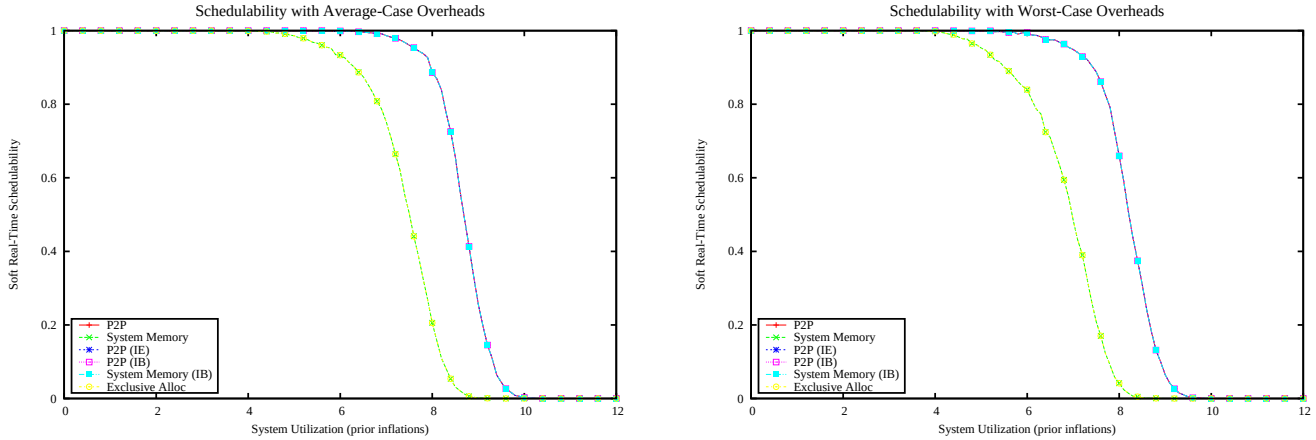

Figure 2503: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

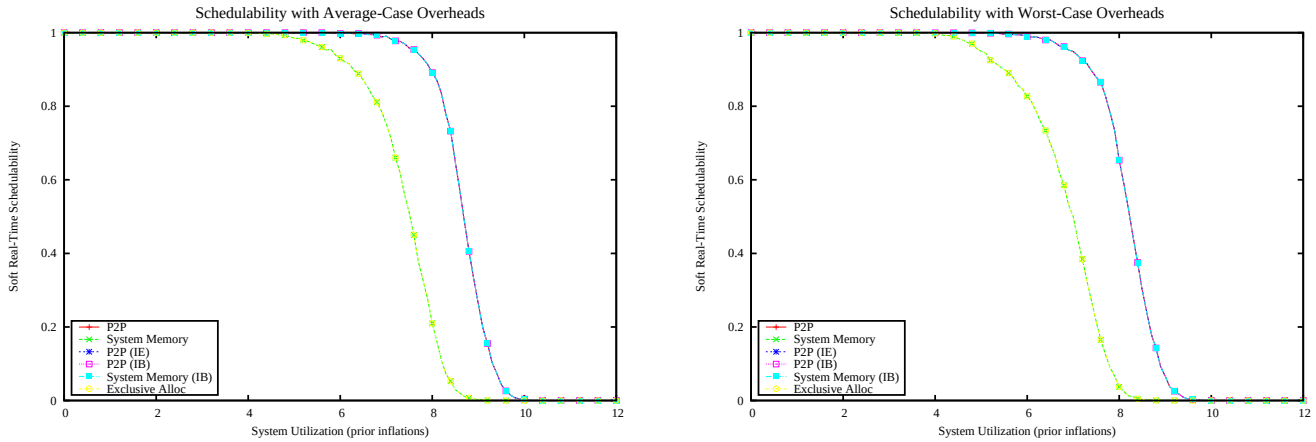

Figure 2504: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

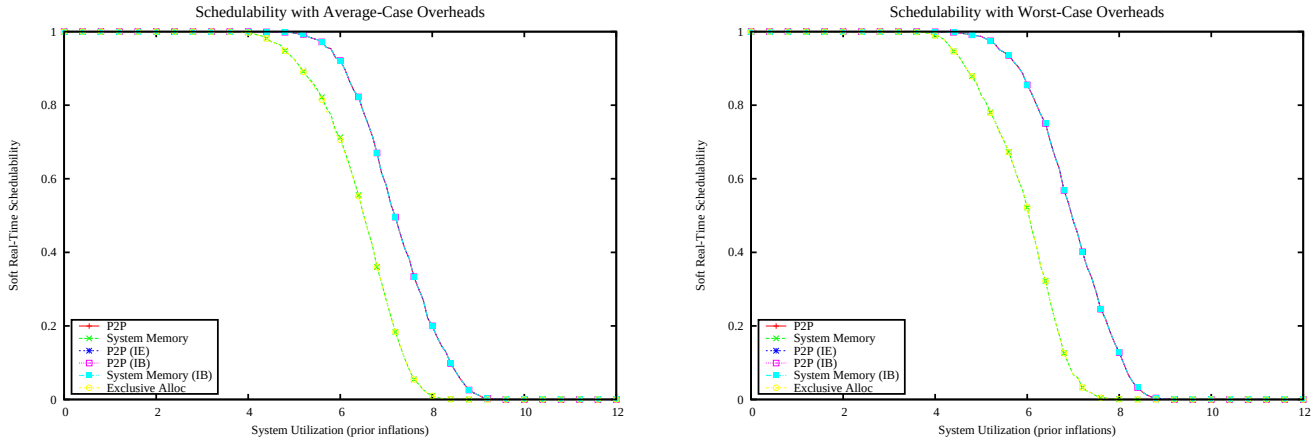

Figure 2505: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

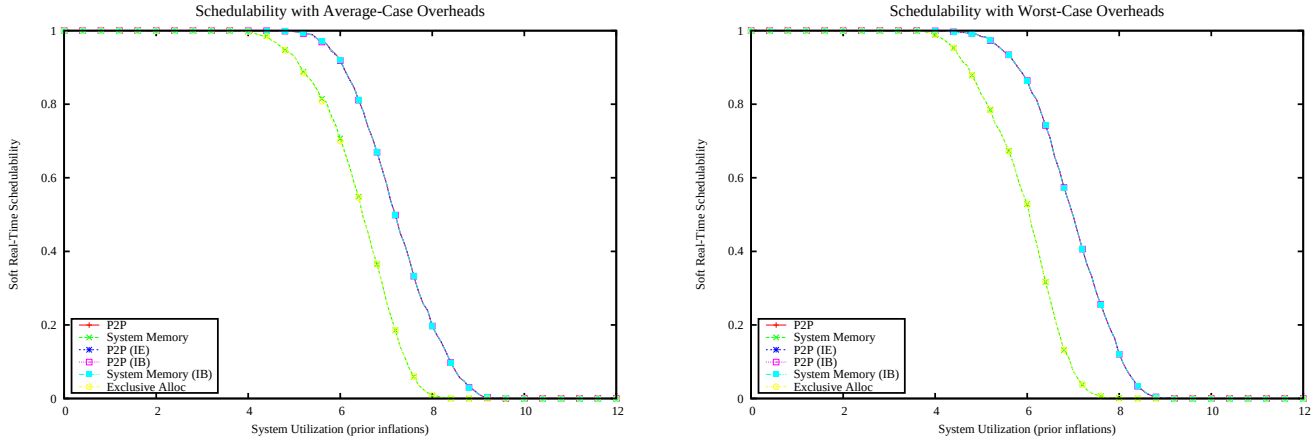

Figure 2506: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

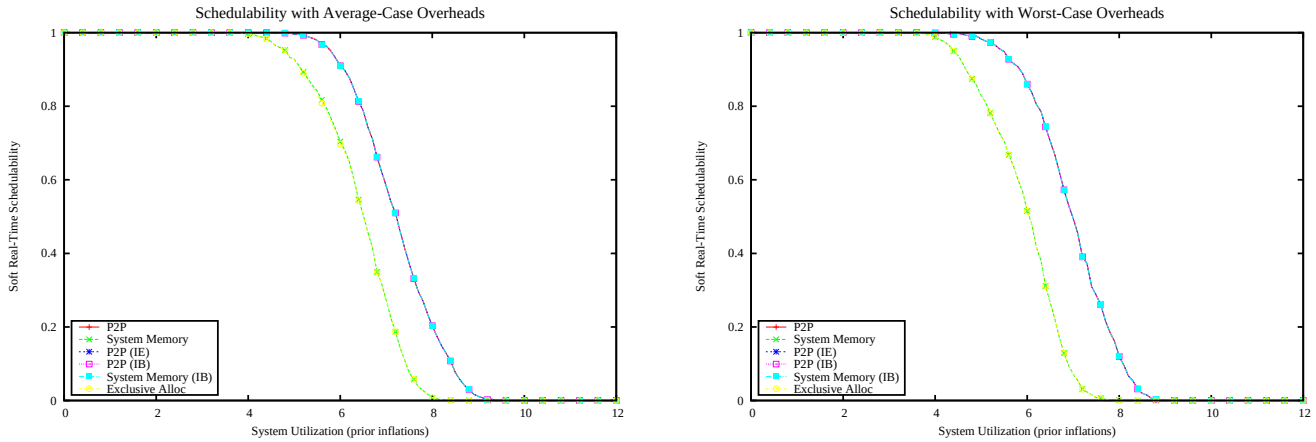

Figure 2507: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

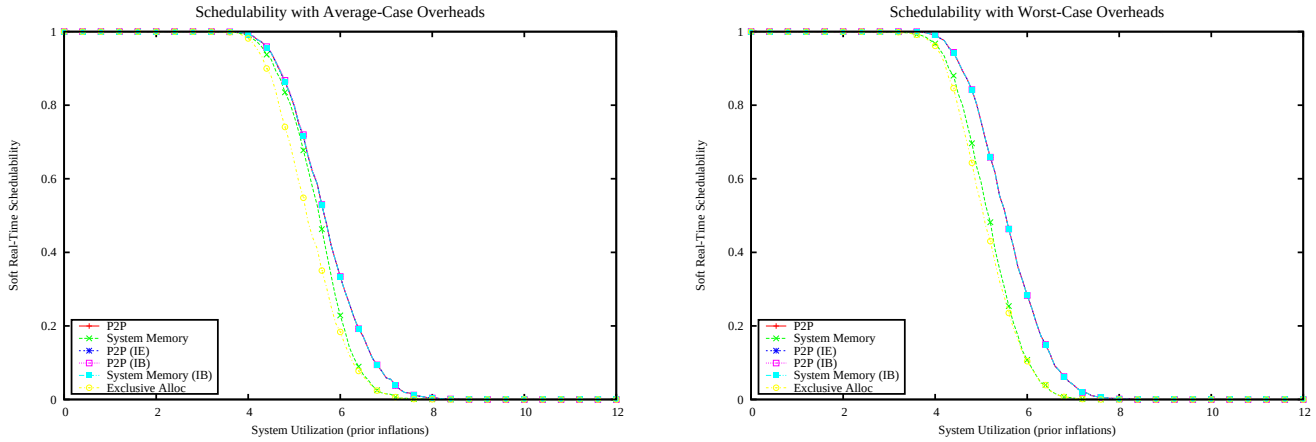

Figure 2508: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

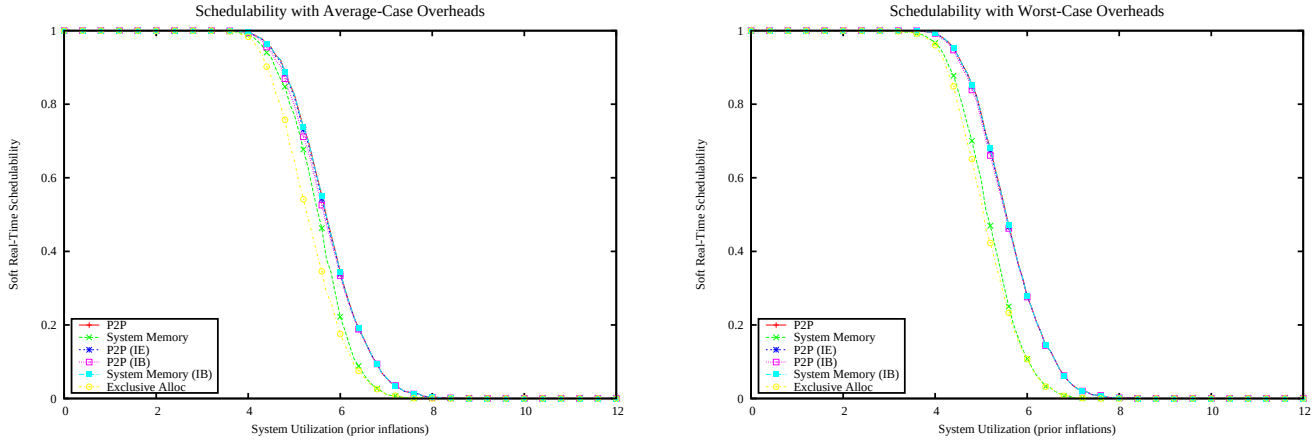

Figure 2509: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

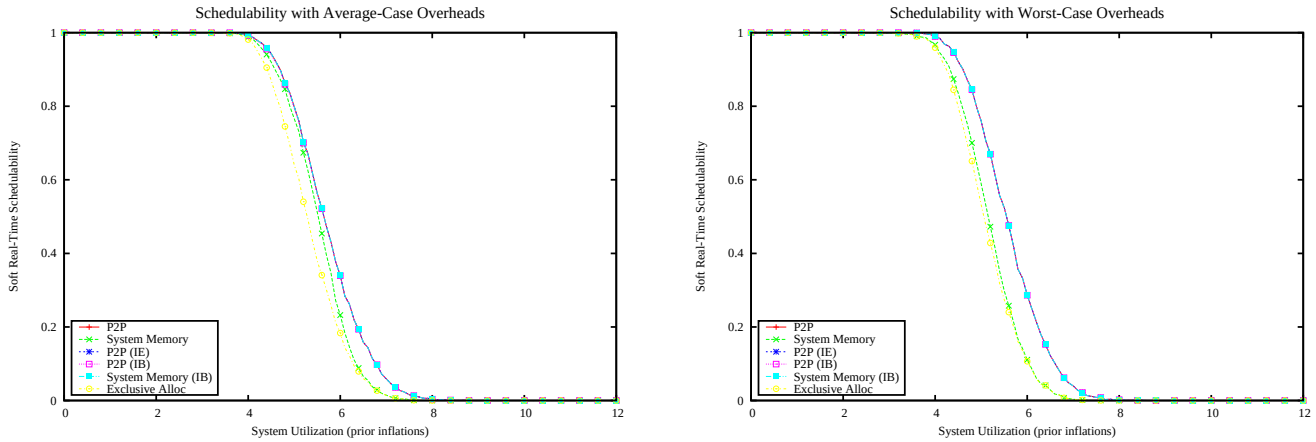

Figure 2510: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

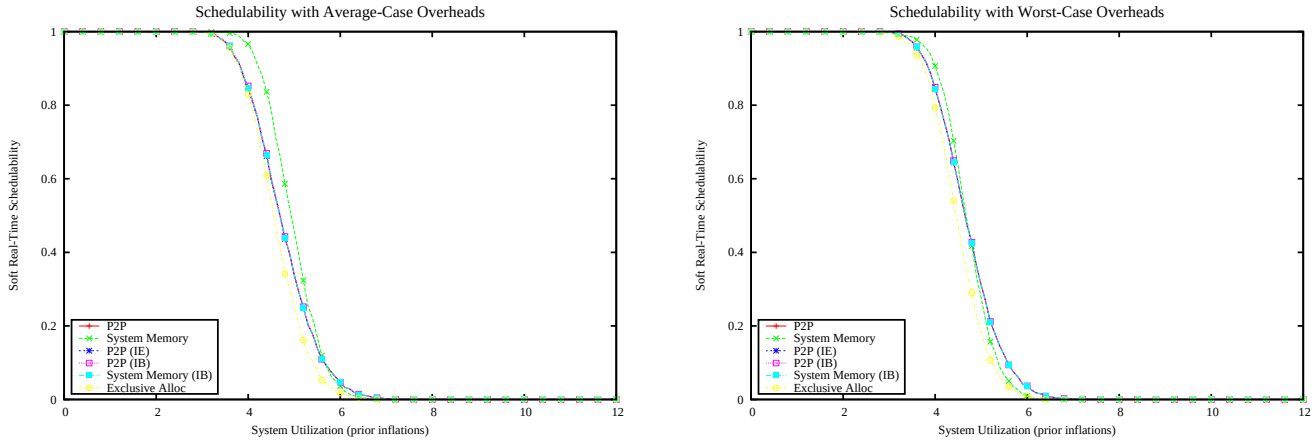

Figure 2511: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

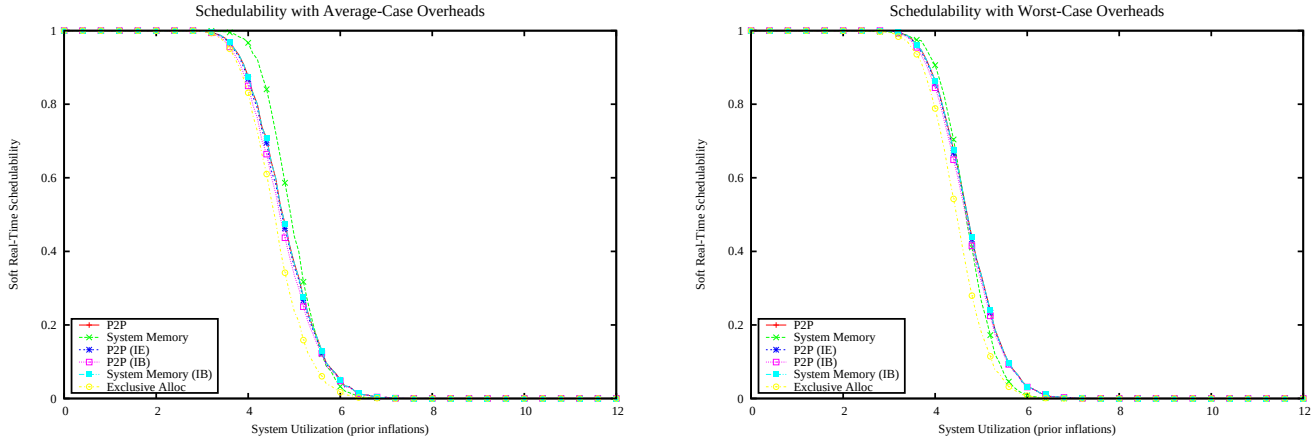

Figure 2512: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

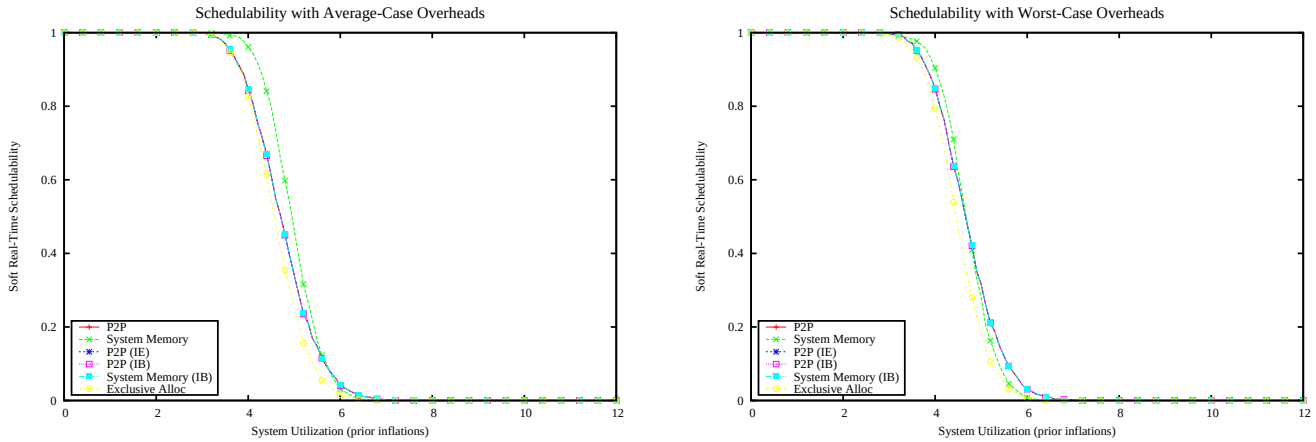

Figure 2513: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

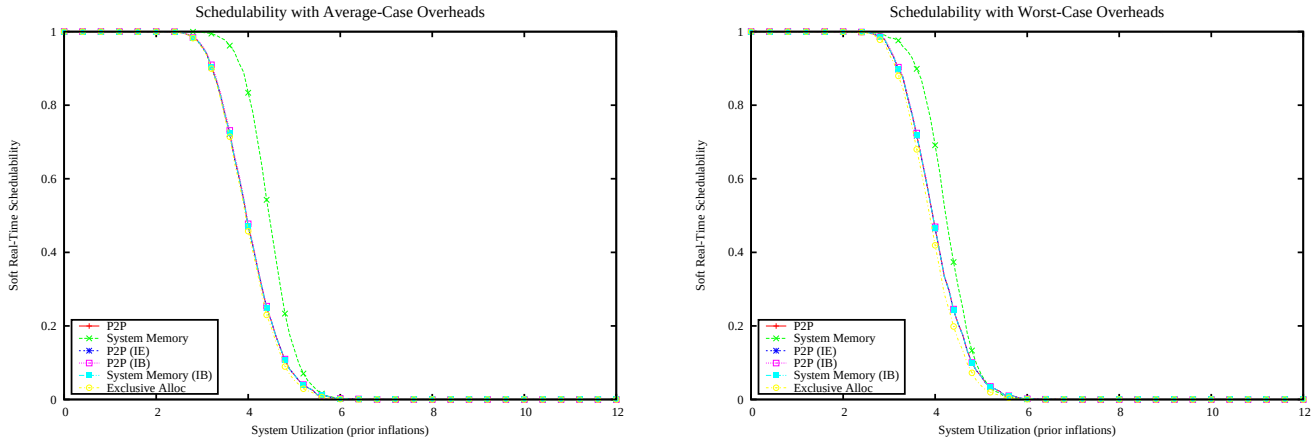

Figure 2514: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

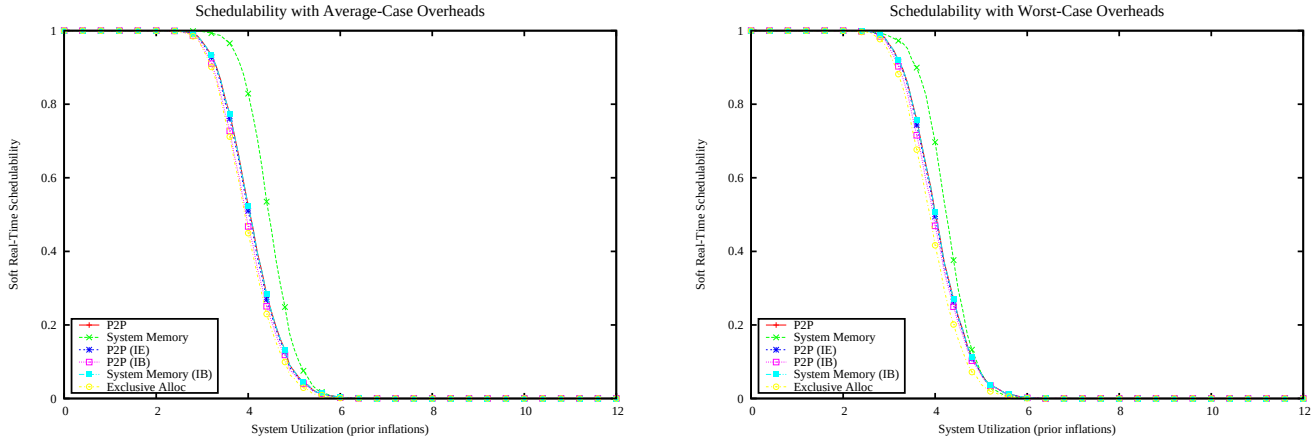

Figure 2515: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

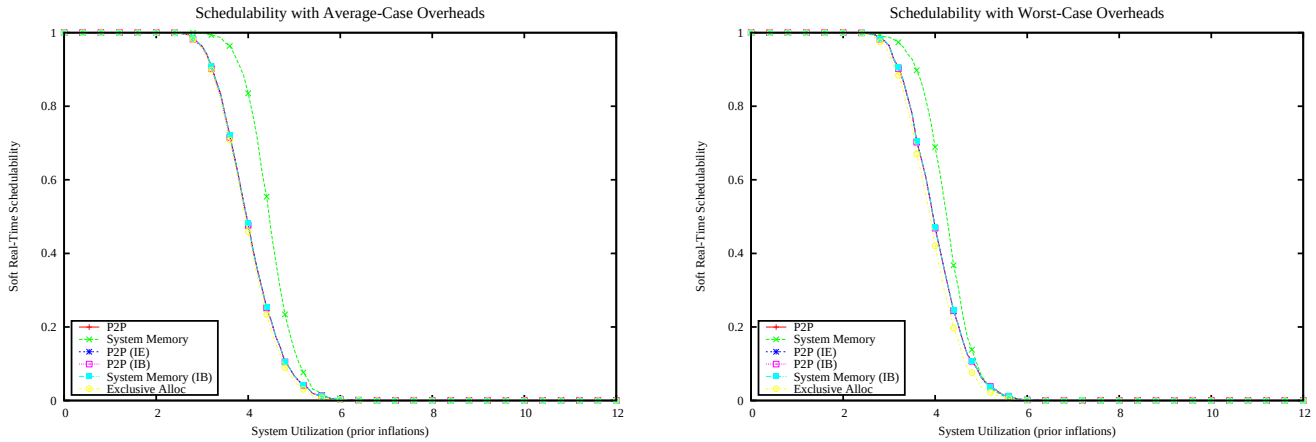

Figure 2516: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

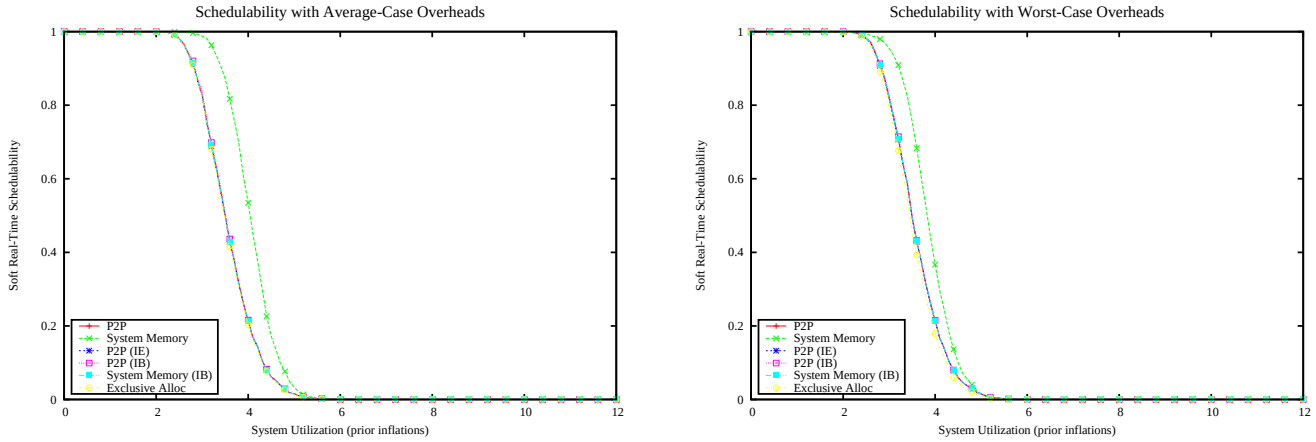

Figure 2517: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

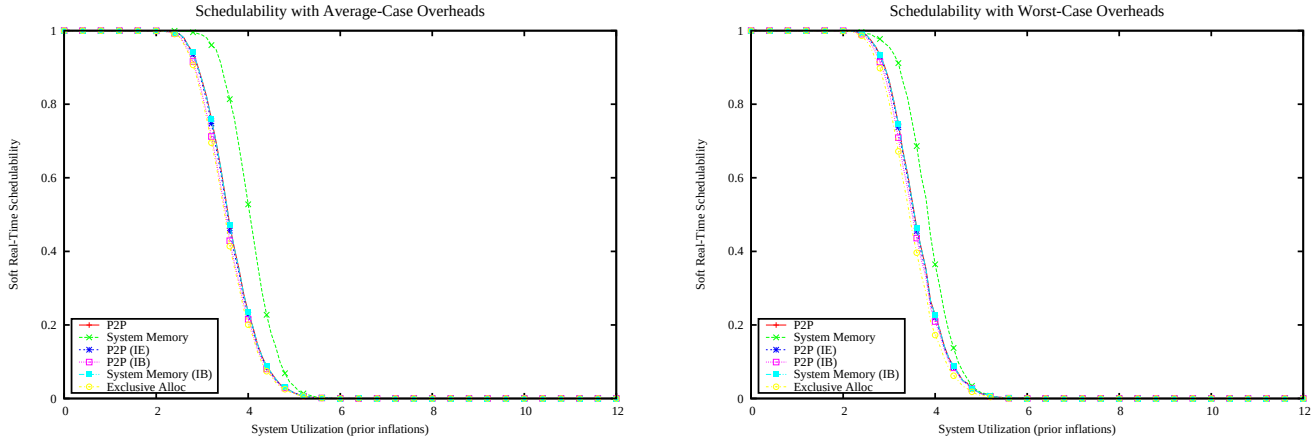

Figure 2518: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

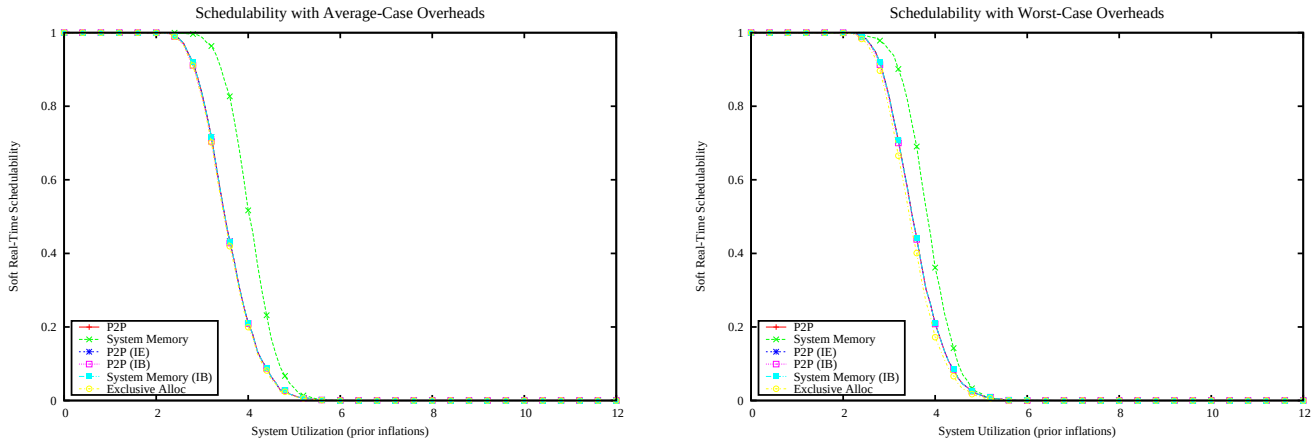

Figure 2519: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

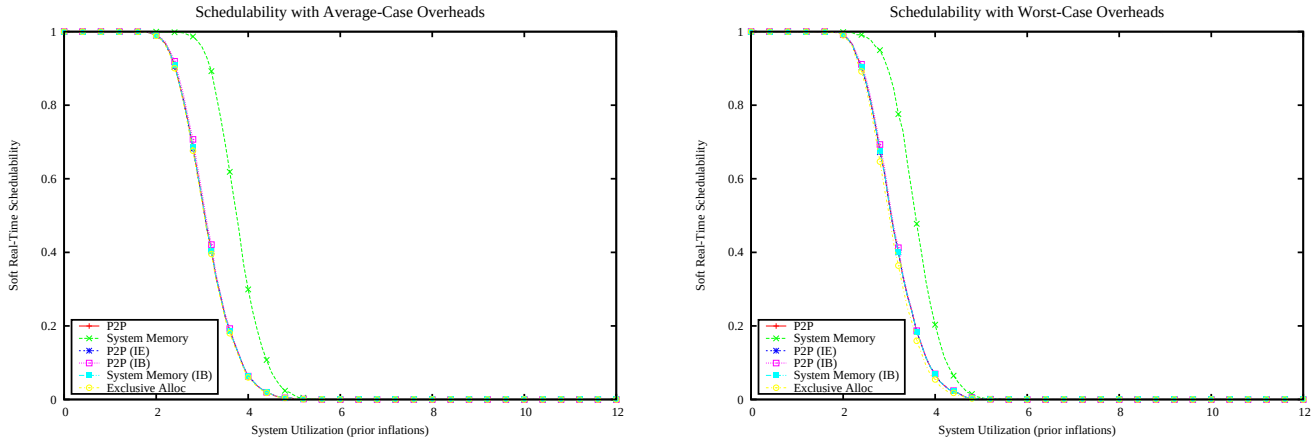

Figure 2520: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

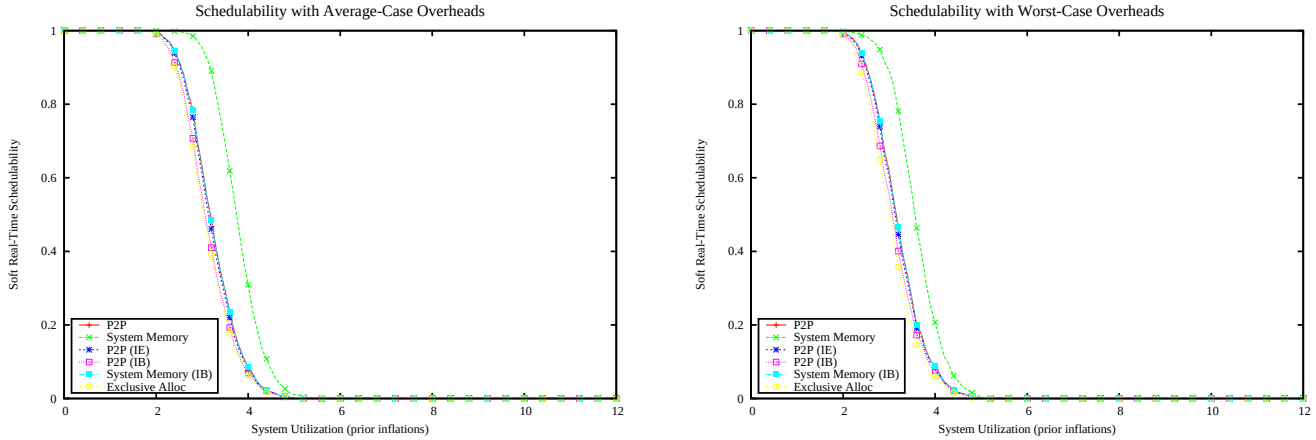

Figure 2521: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

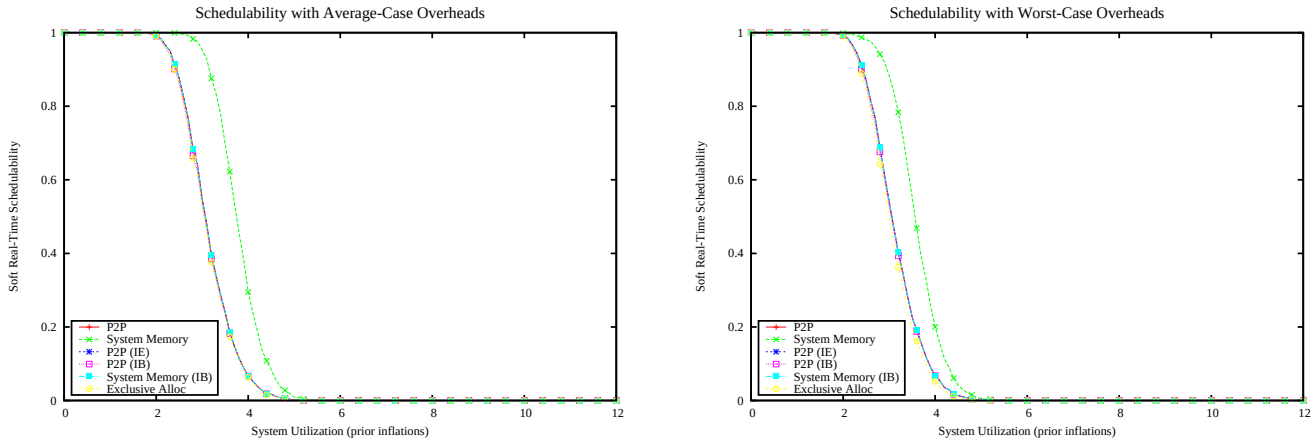

Figure 2522: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

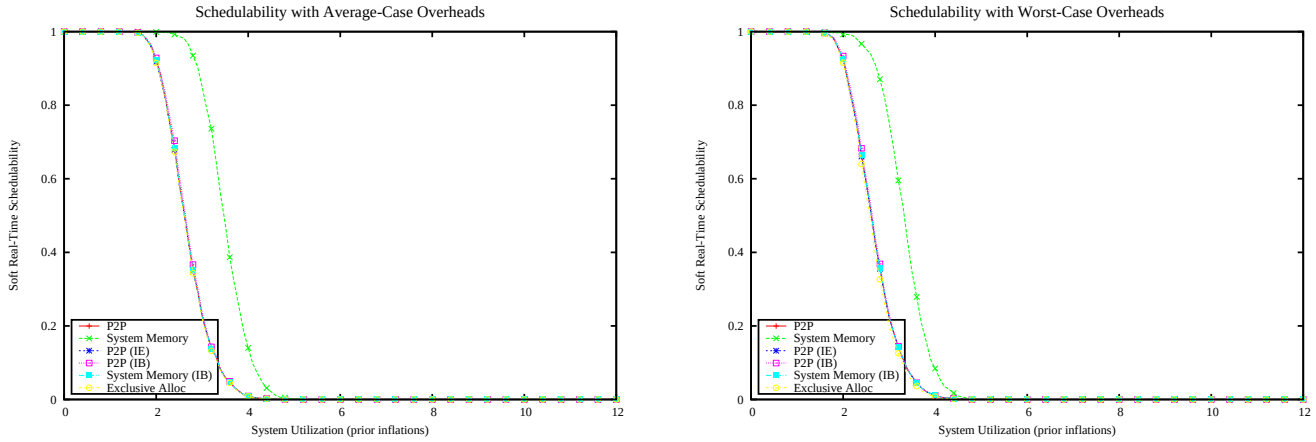

Figure 2523: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

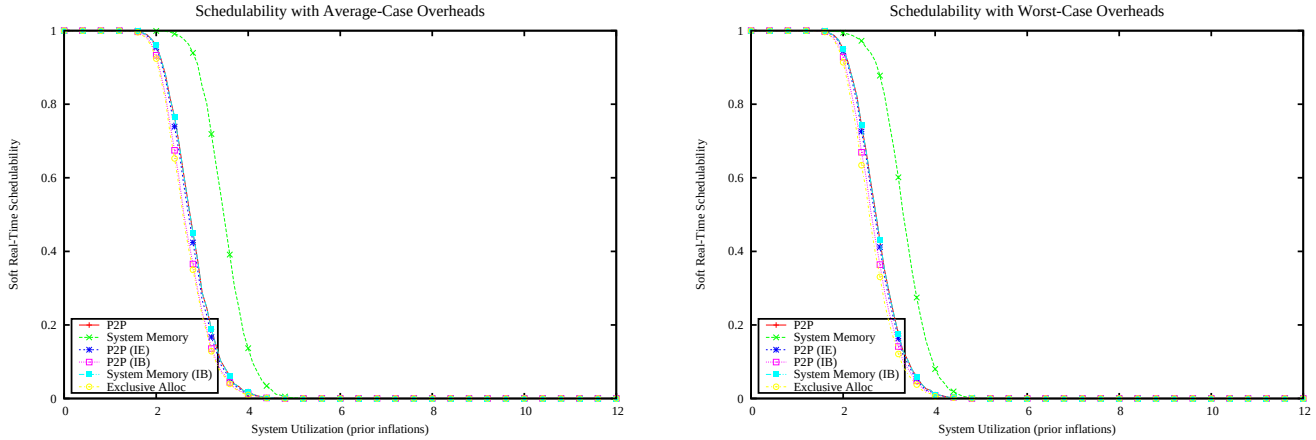

Figure 2524: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

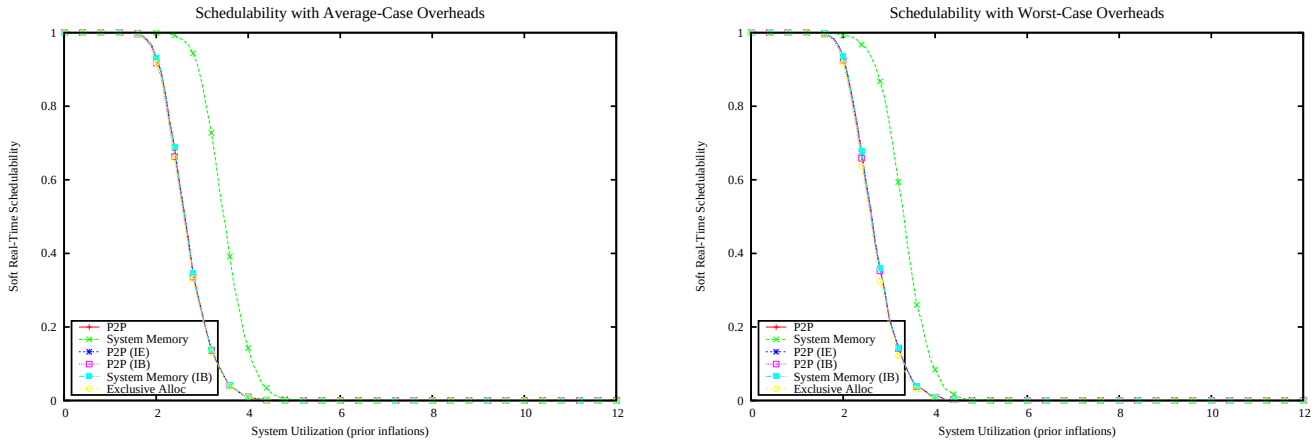

Figure 2525: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

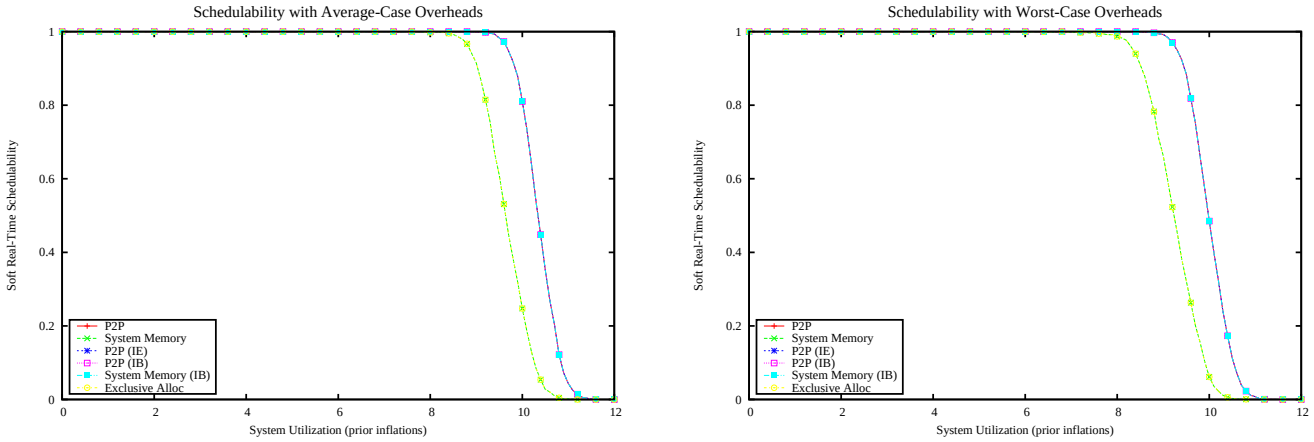

Figure 2526: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

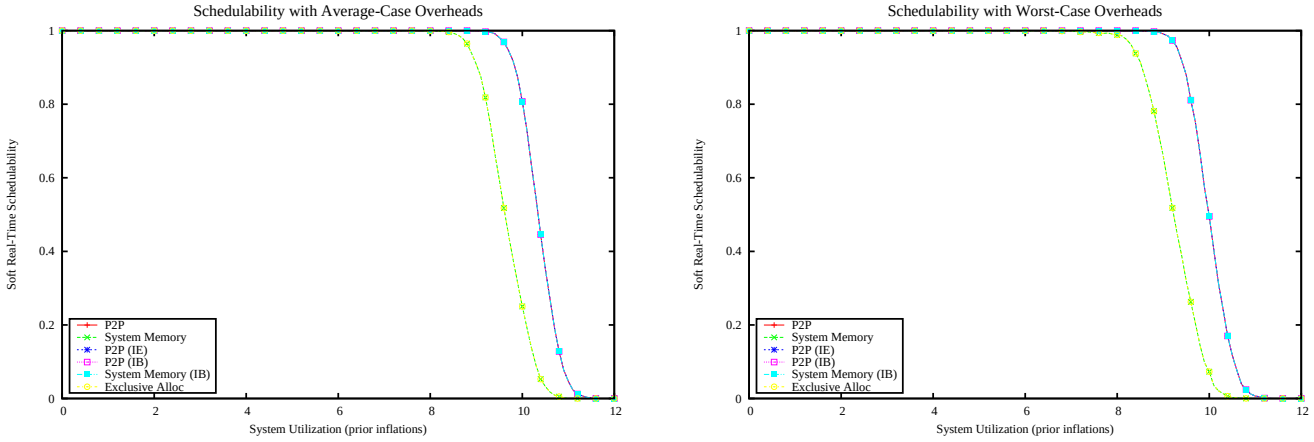

Figure 2527: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

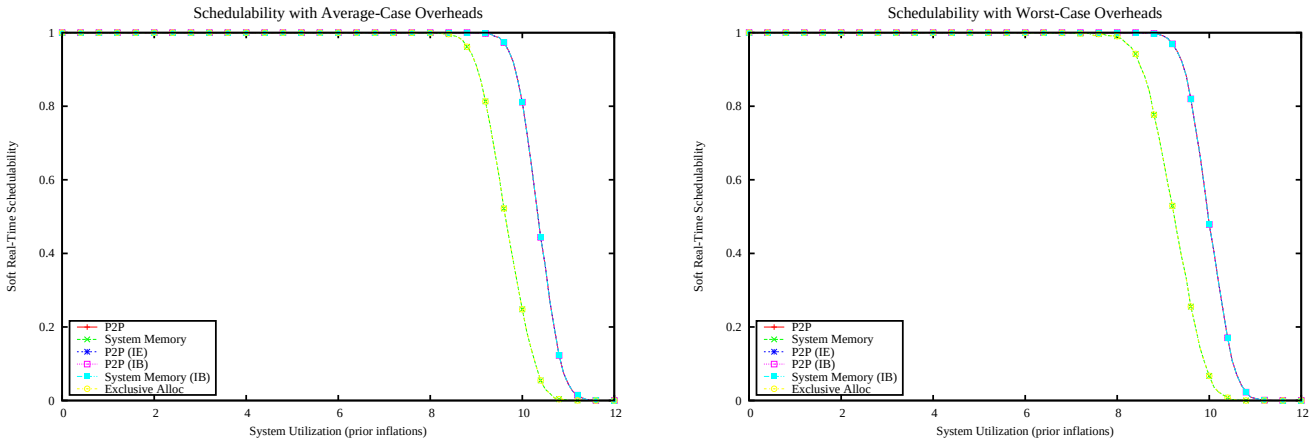

Figure 2528: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

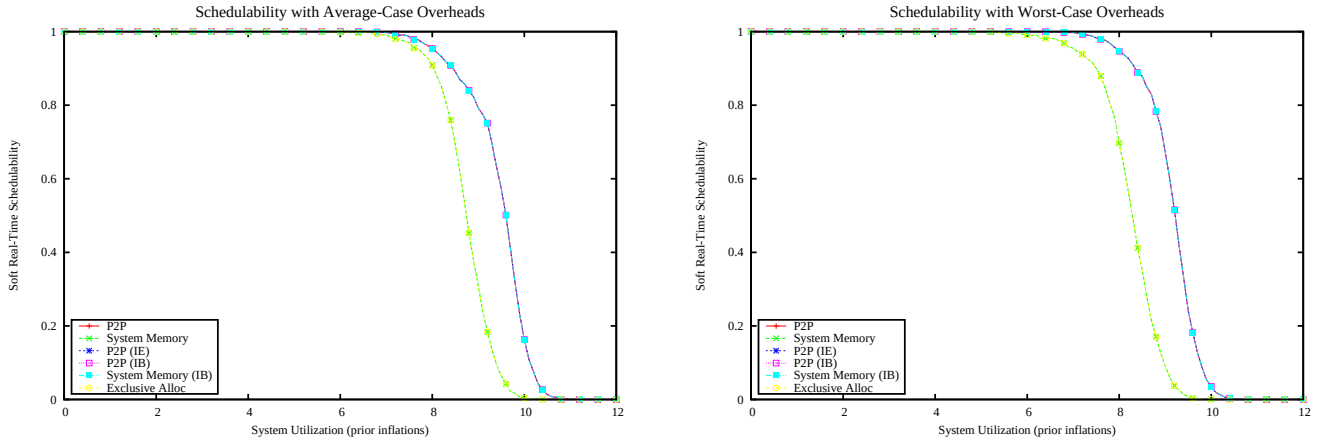

Figure 2529: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

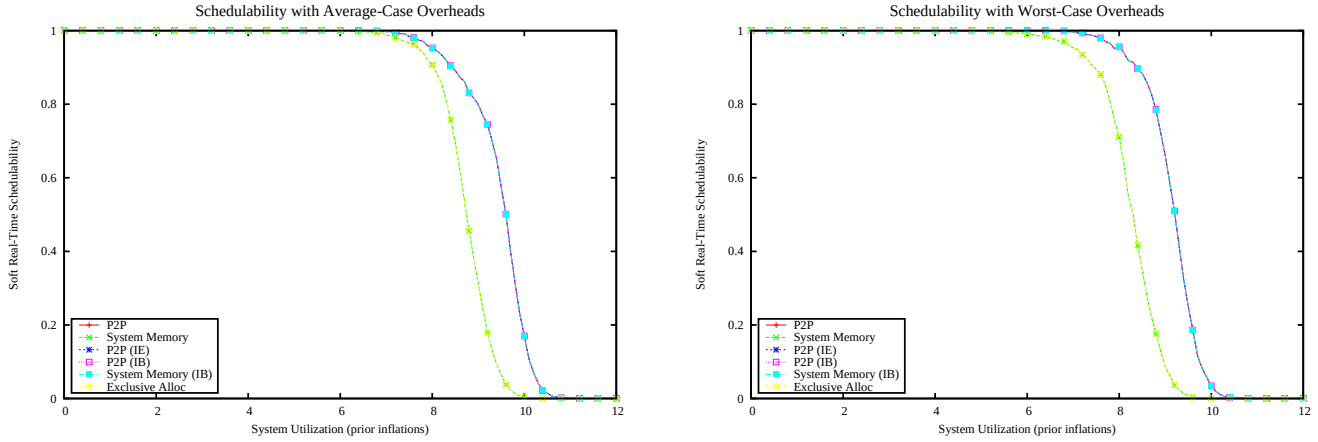

Figure 2530: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

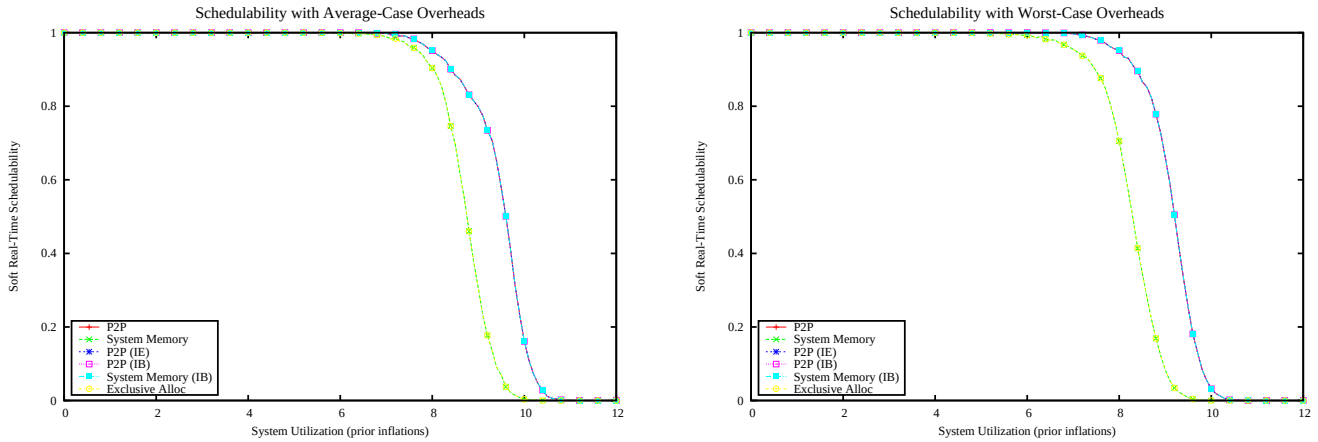

Figure 2531: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

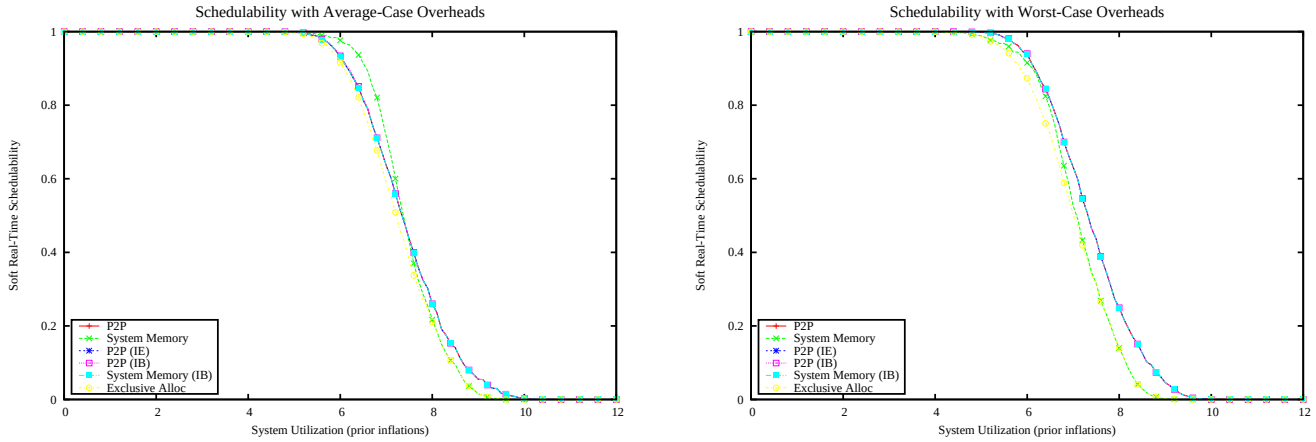

Figure 2532: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

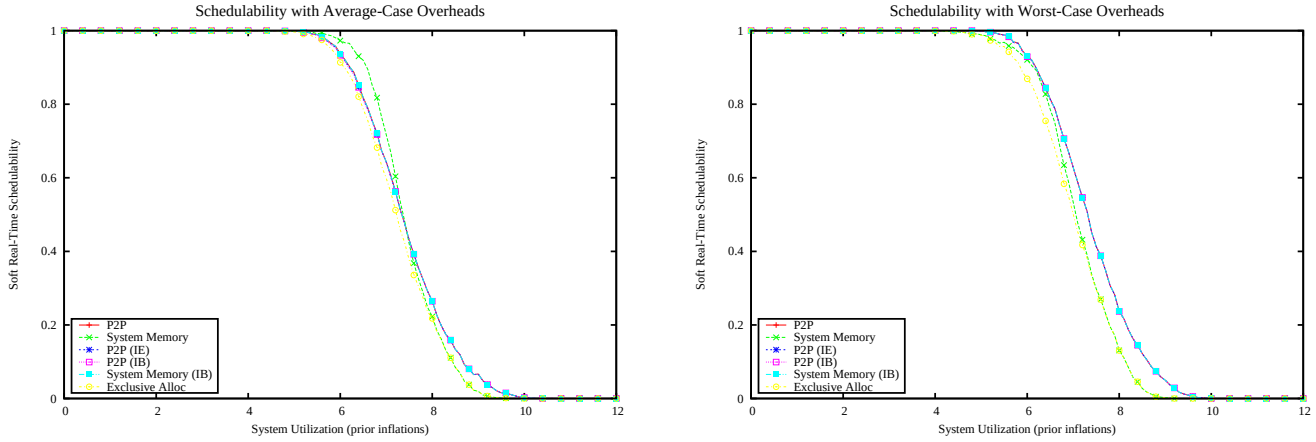

Figure 2533: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

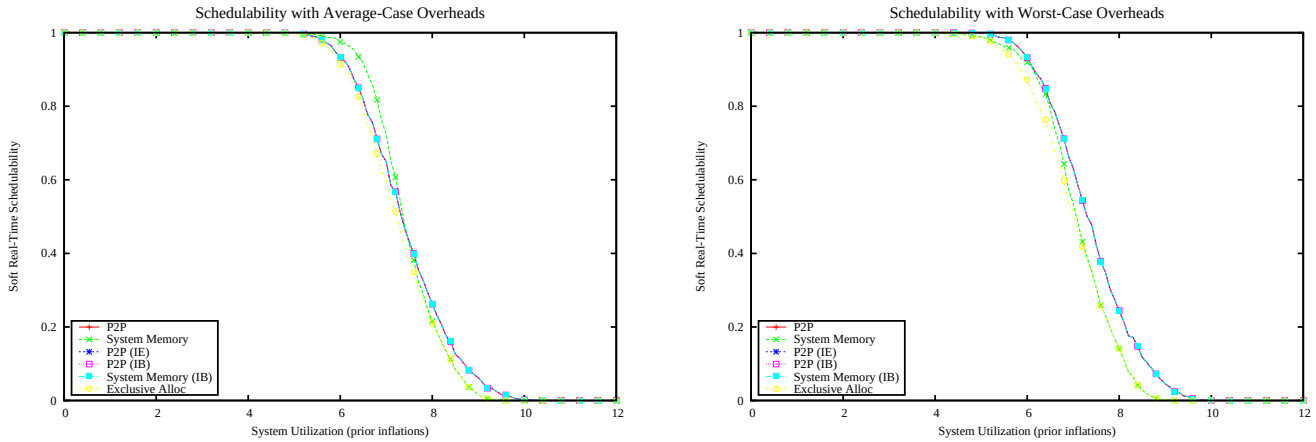

Figure 2534: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

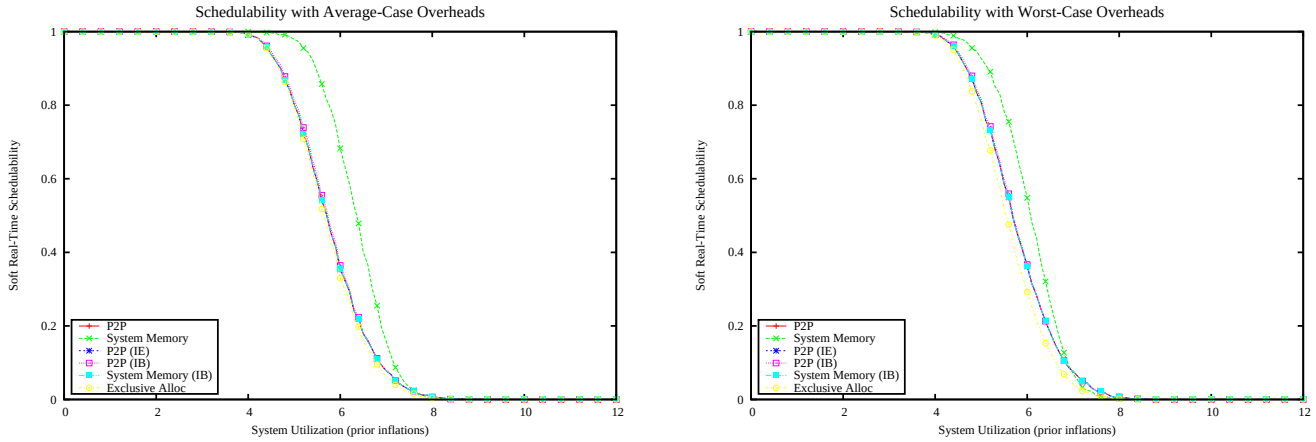

Figure 2535: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

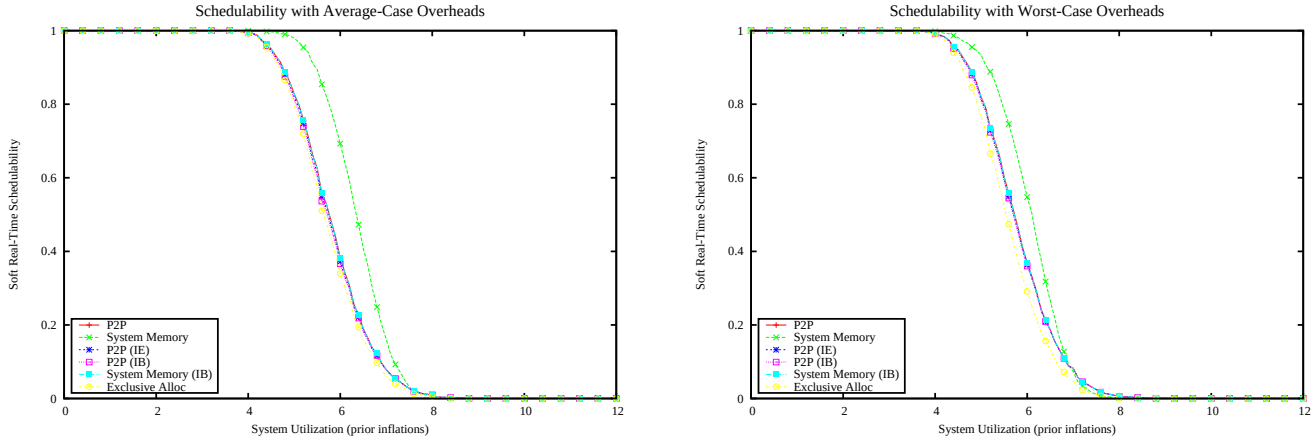

Figure 2536: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

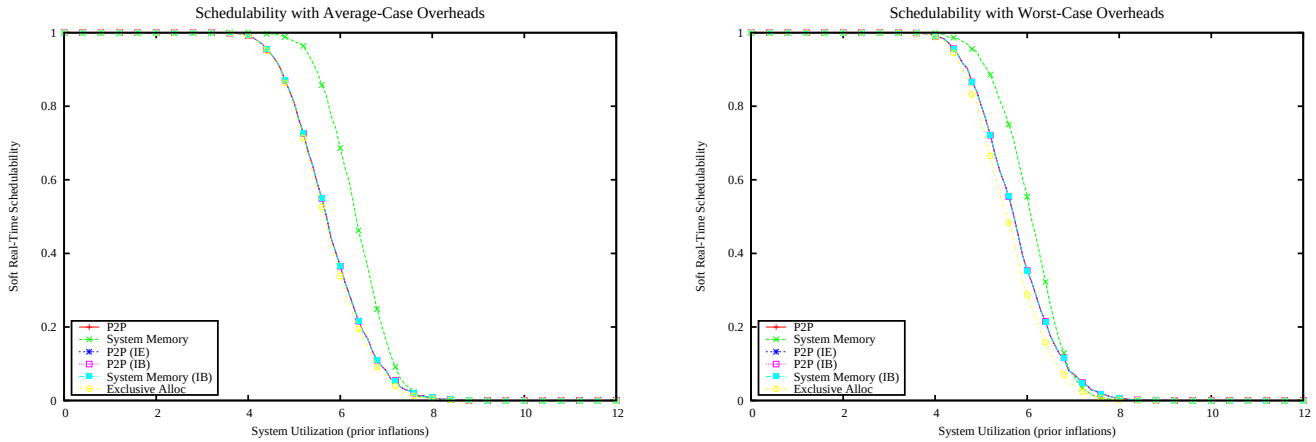

Figure 2537: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

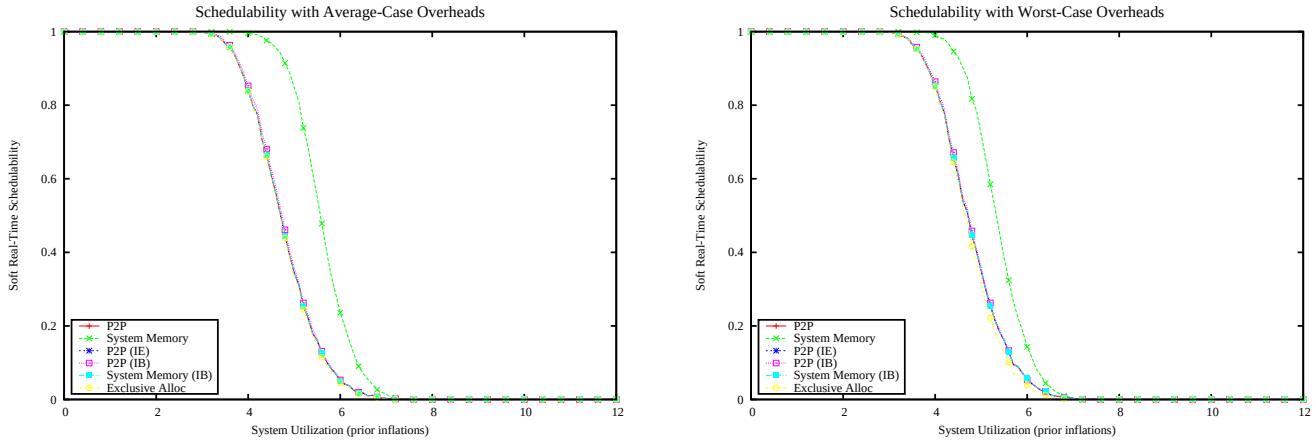

Figure 2538: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

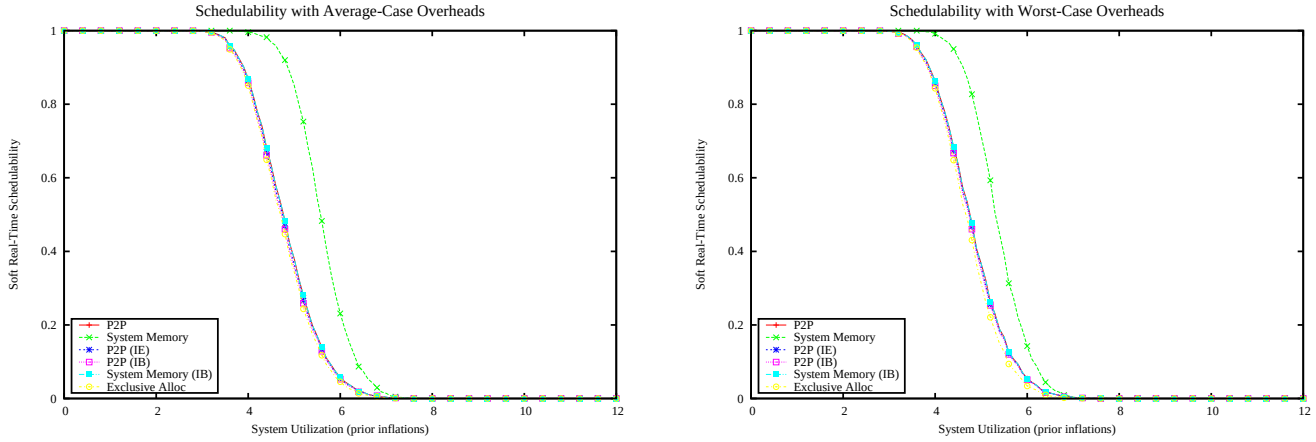

Figure 2539: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

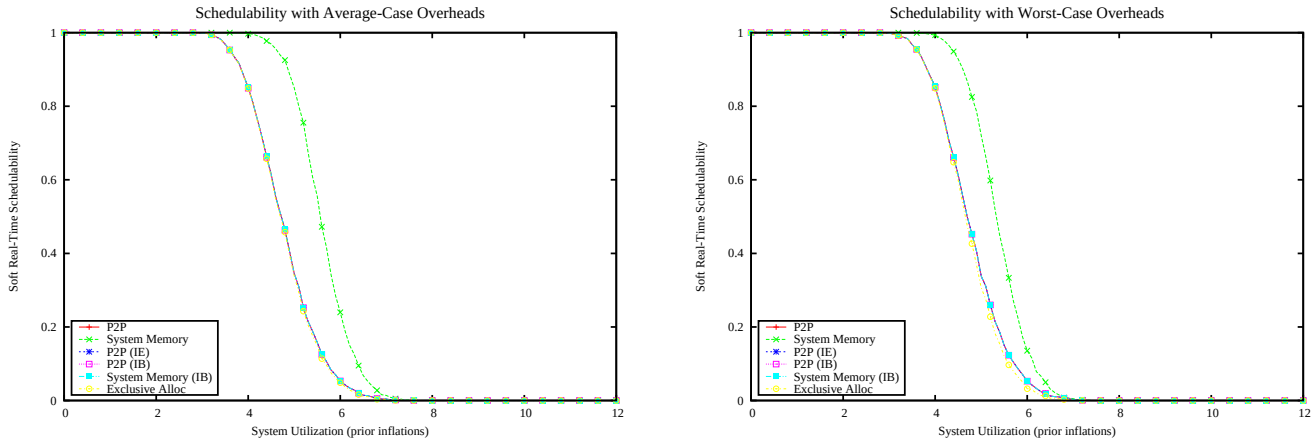

Figure 2540: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

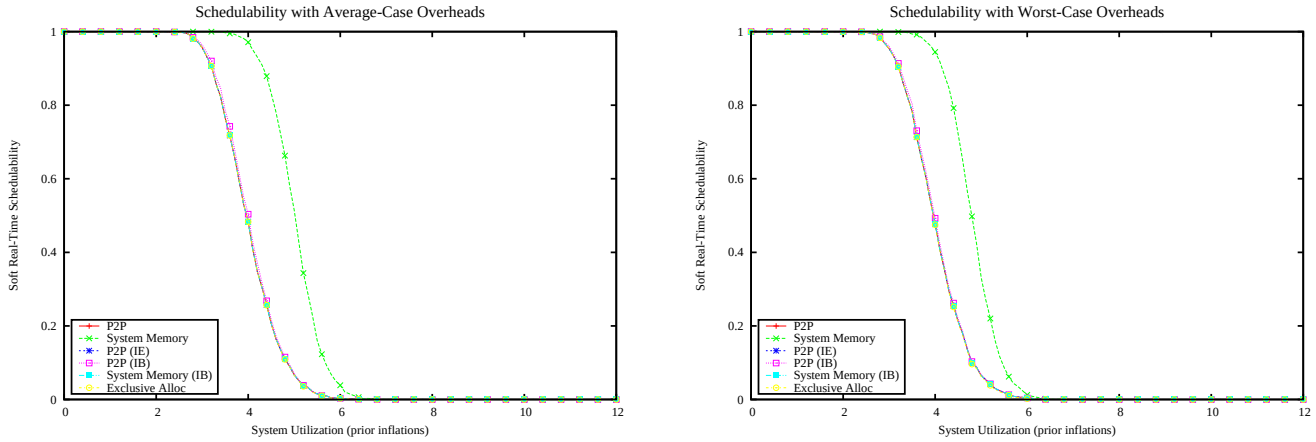

Figure 2541: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

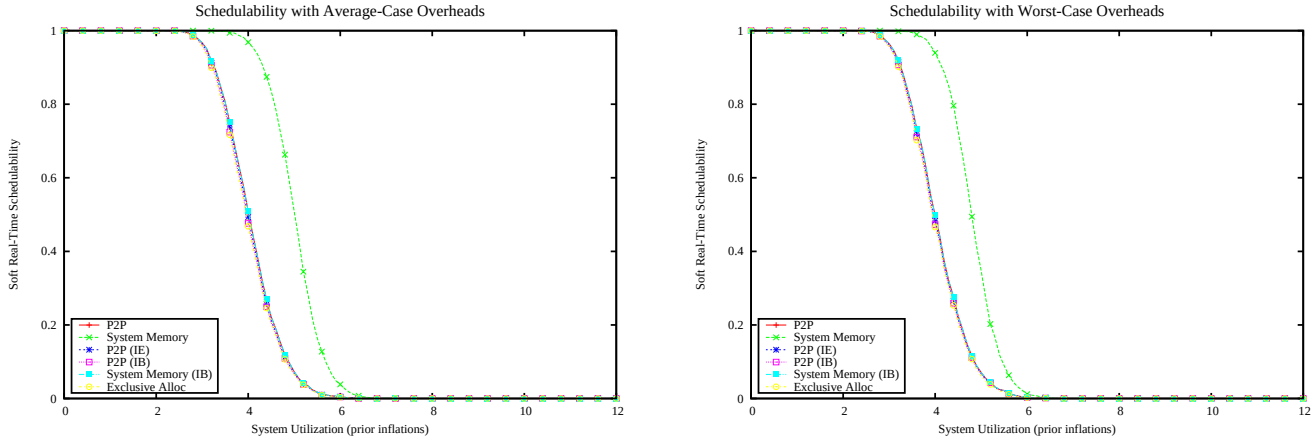

Figure 2542: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

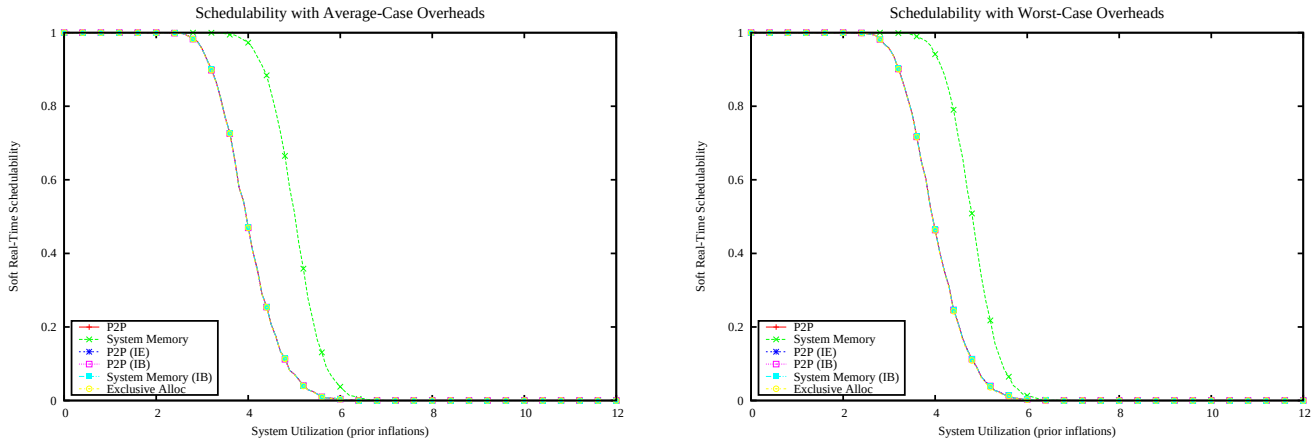

Figure 2543: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

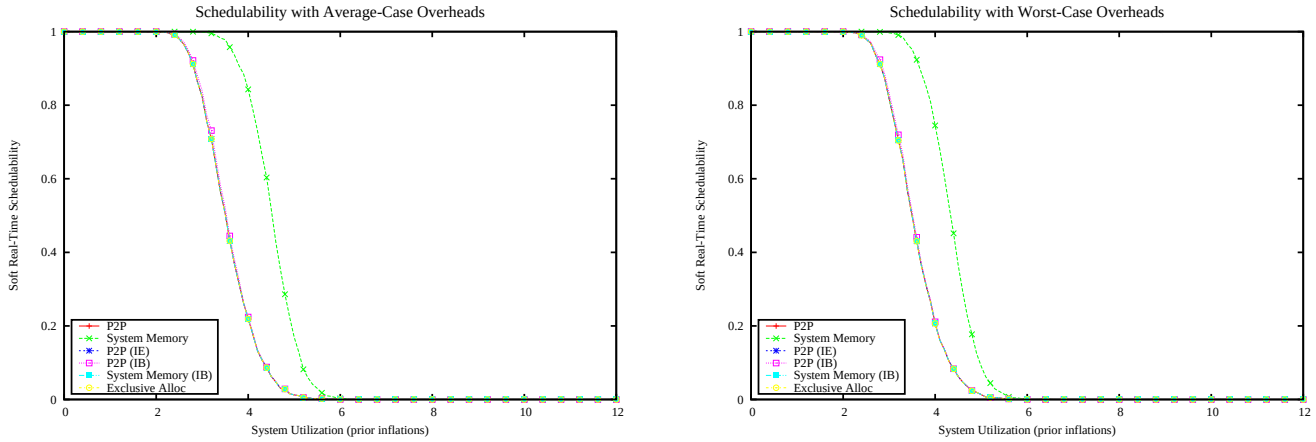

Figure 2544: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

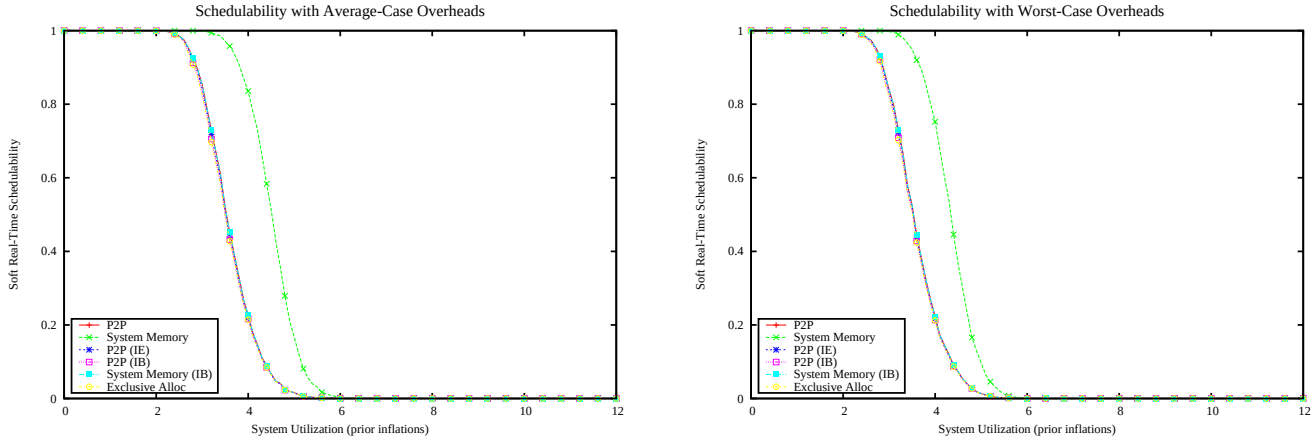

Figure 2545: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

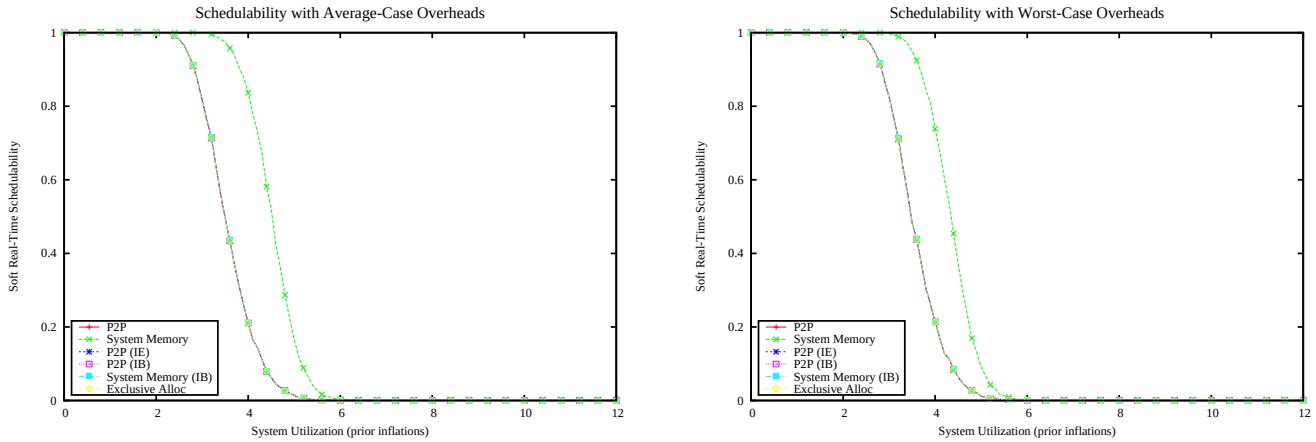

Figure 2546: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

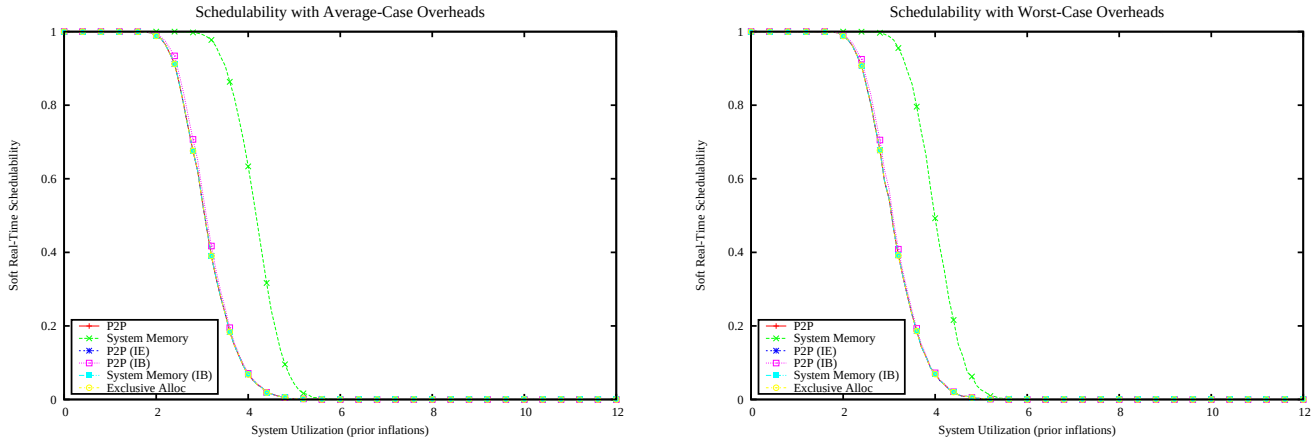

Figure 2547: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

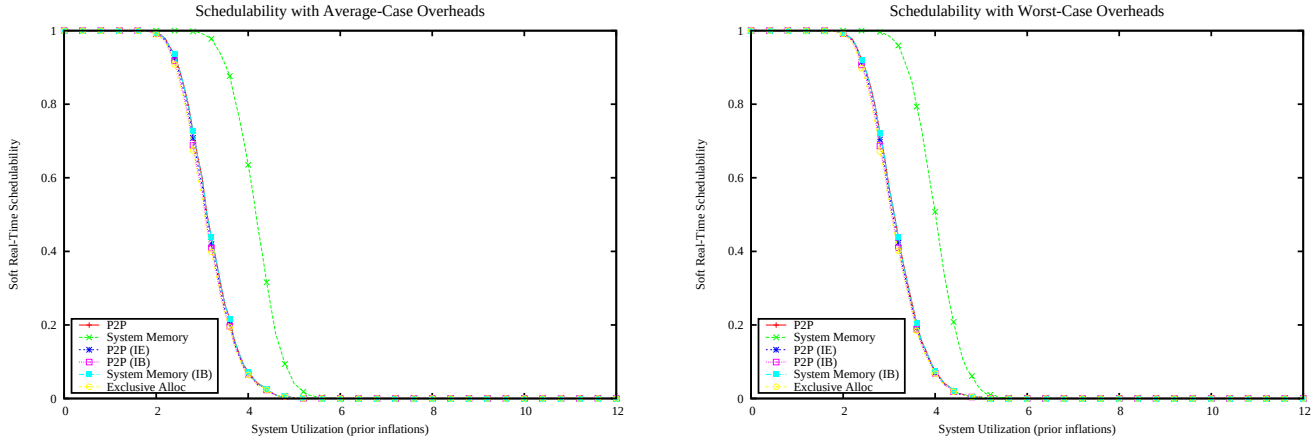

Figure 2548: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

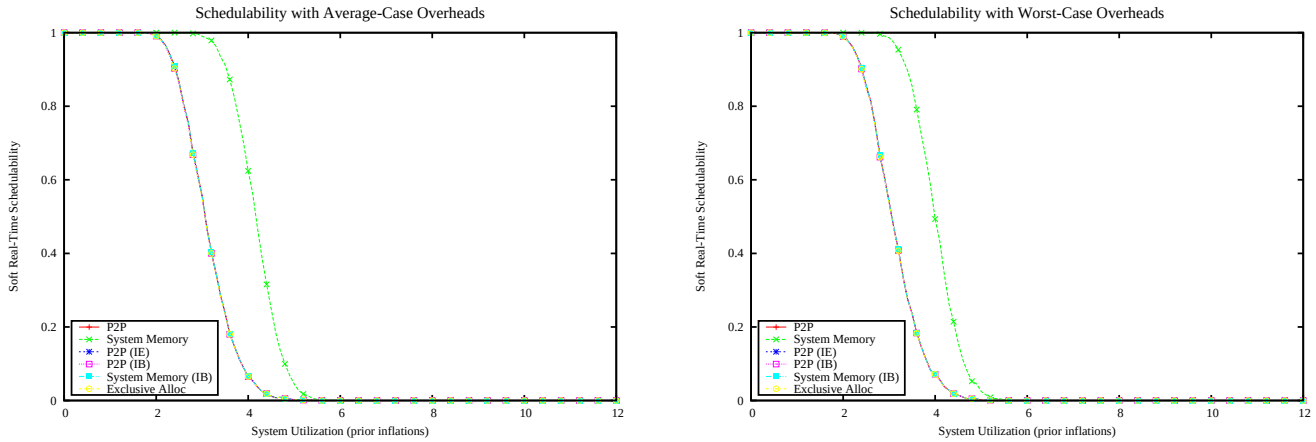

Figure 2549: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

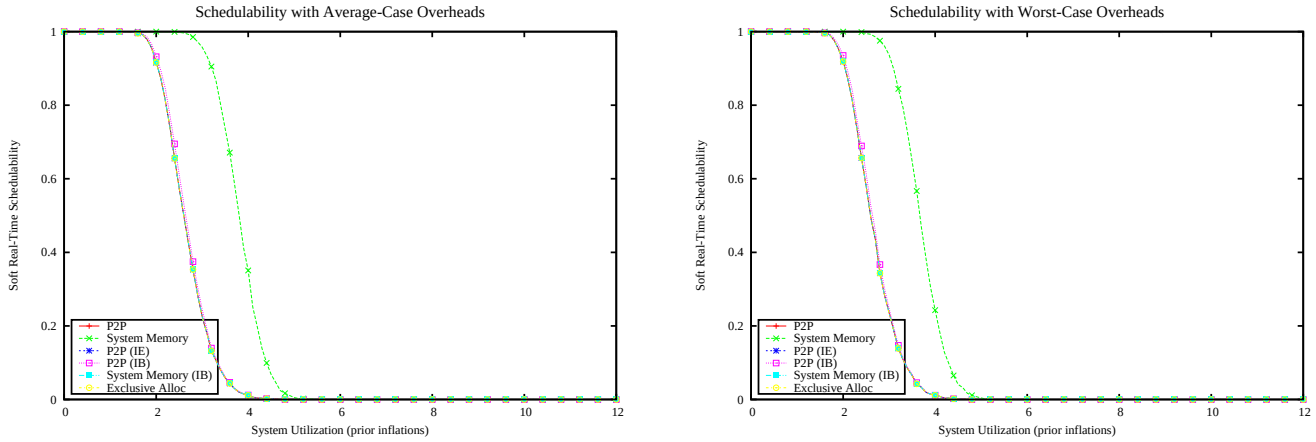

Figure 2550: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

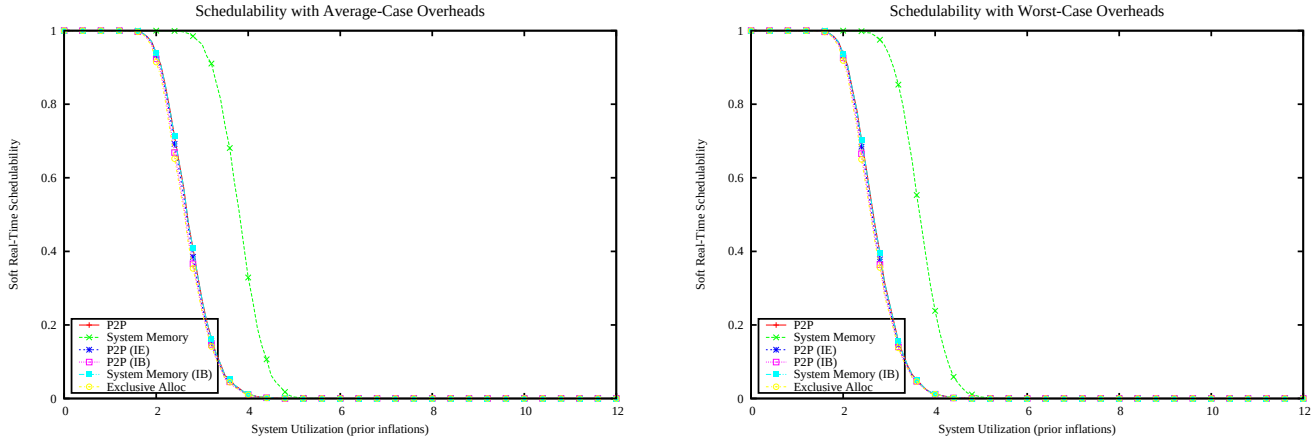

Figure 2551: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

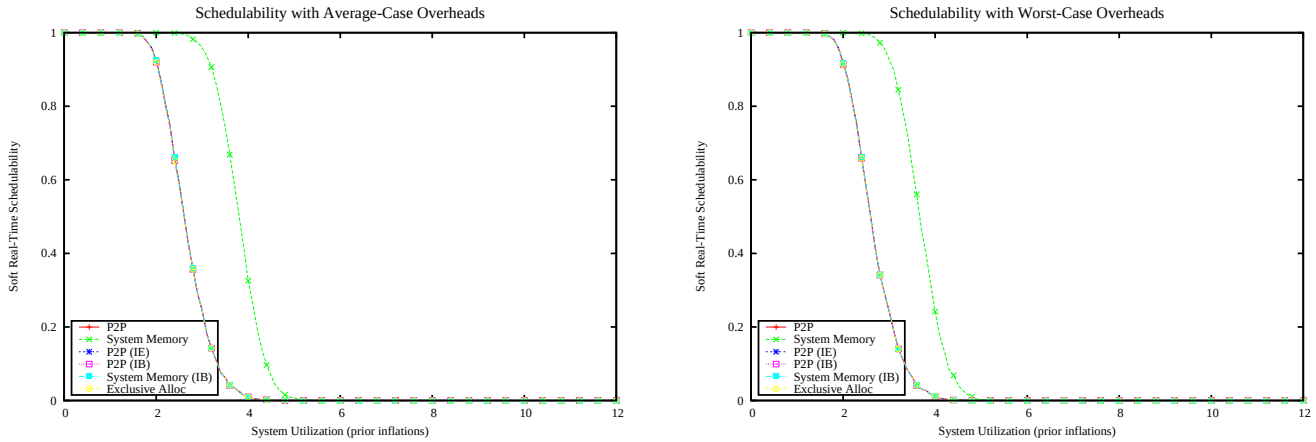

Figure 2552: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

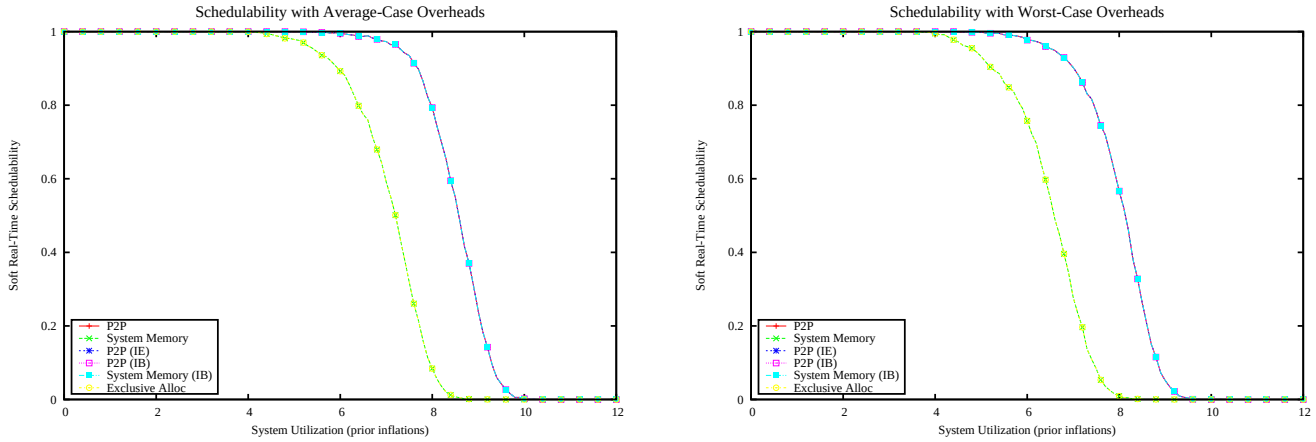

Figure 2553: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

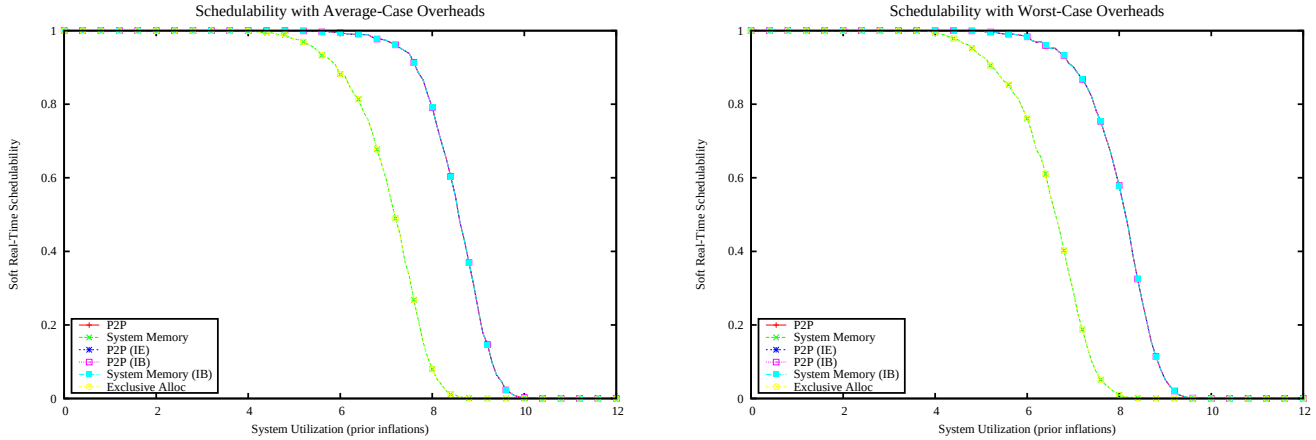

Figure 2554: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

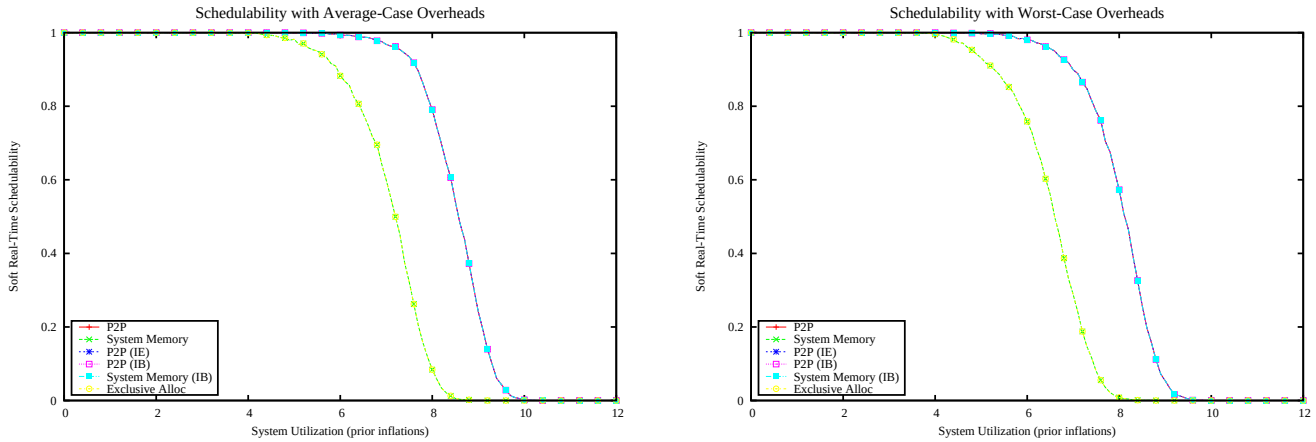

Figure 2555: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

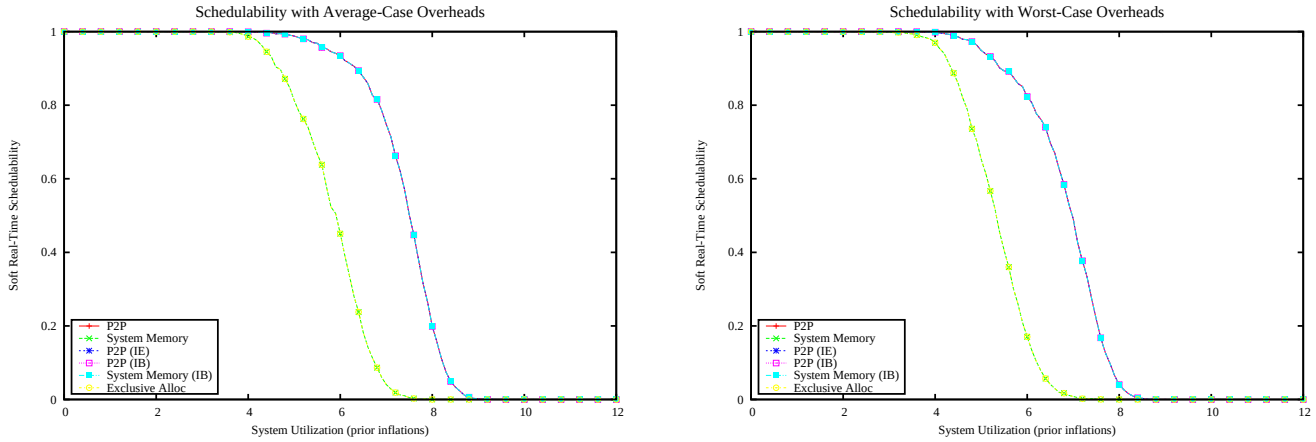

Figure 2556: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

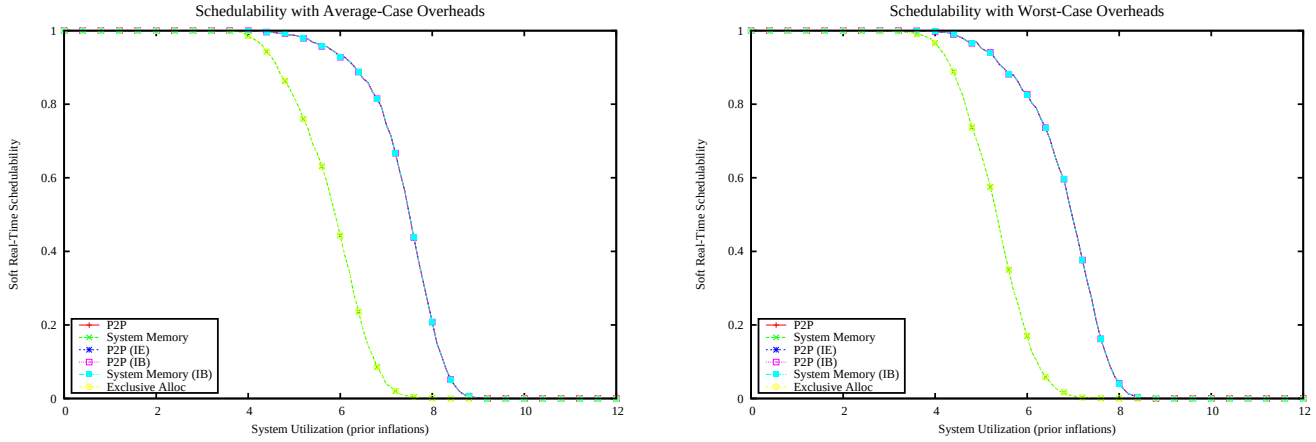

Figure 2557: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

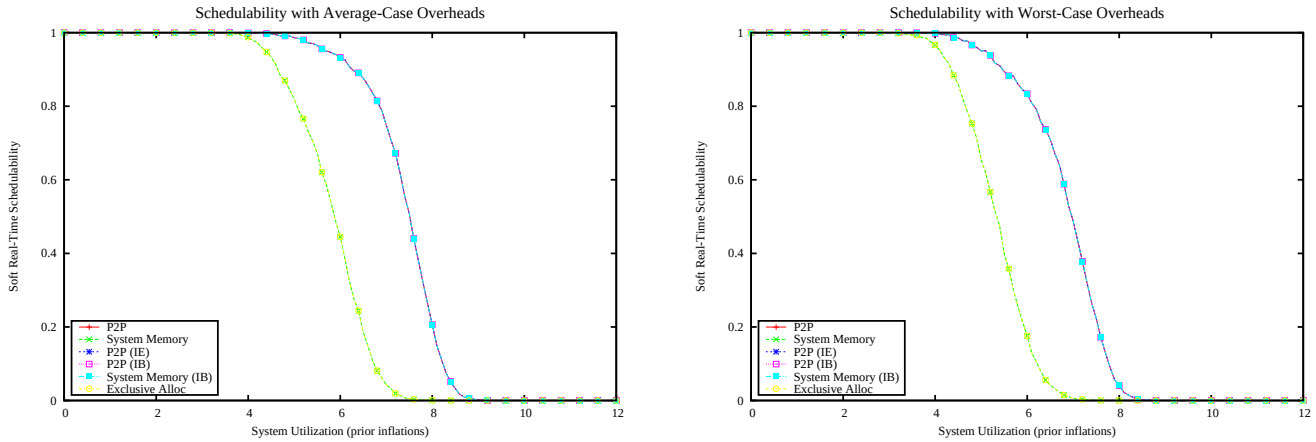

Figure 2558: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

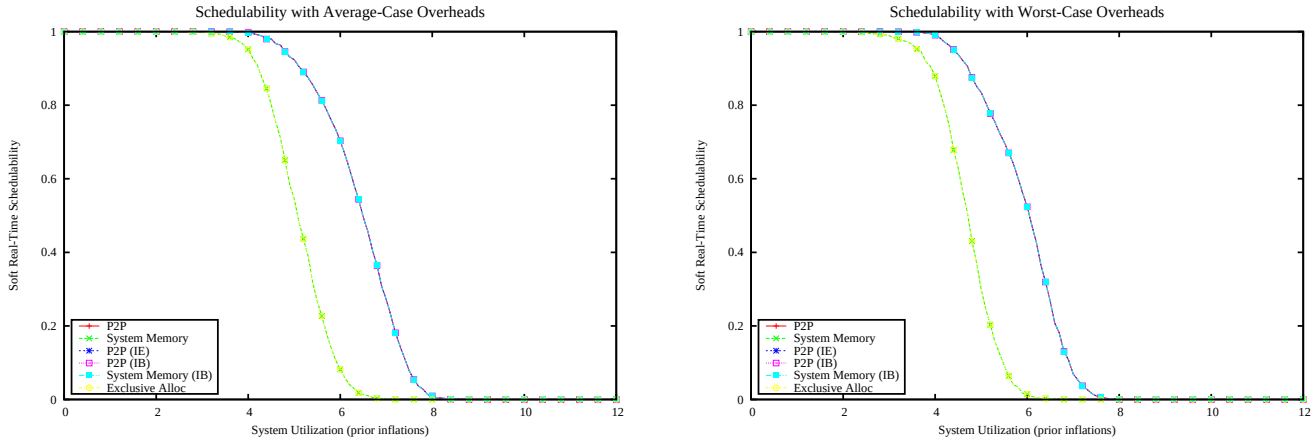

Figure 2559: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

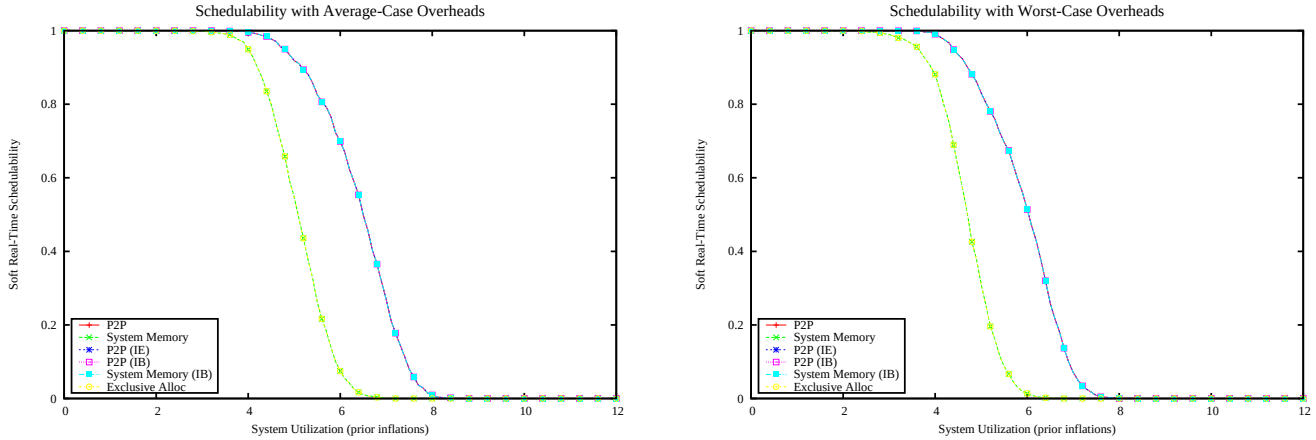

Figure 2560: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

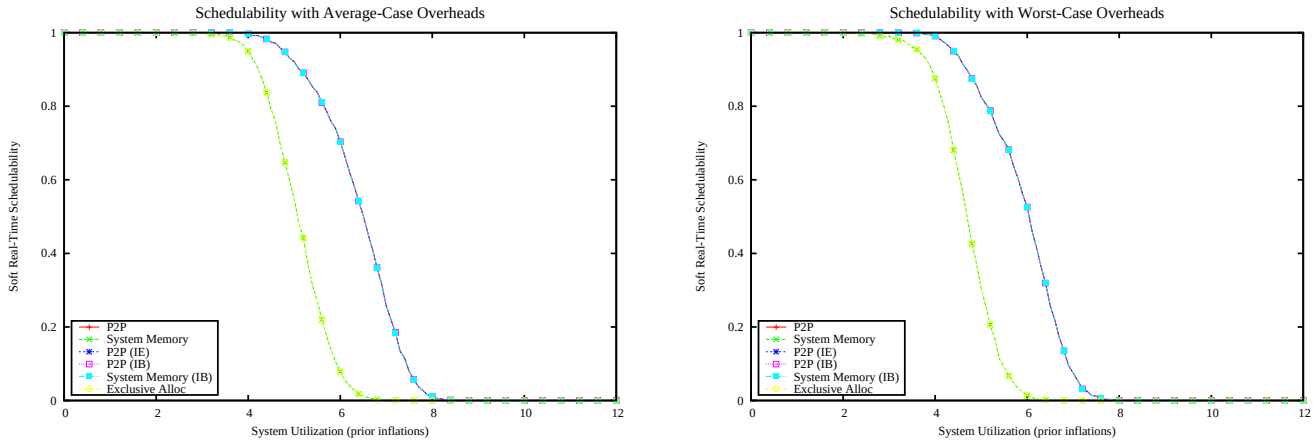

Figure 2561: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

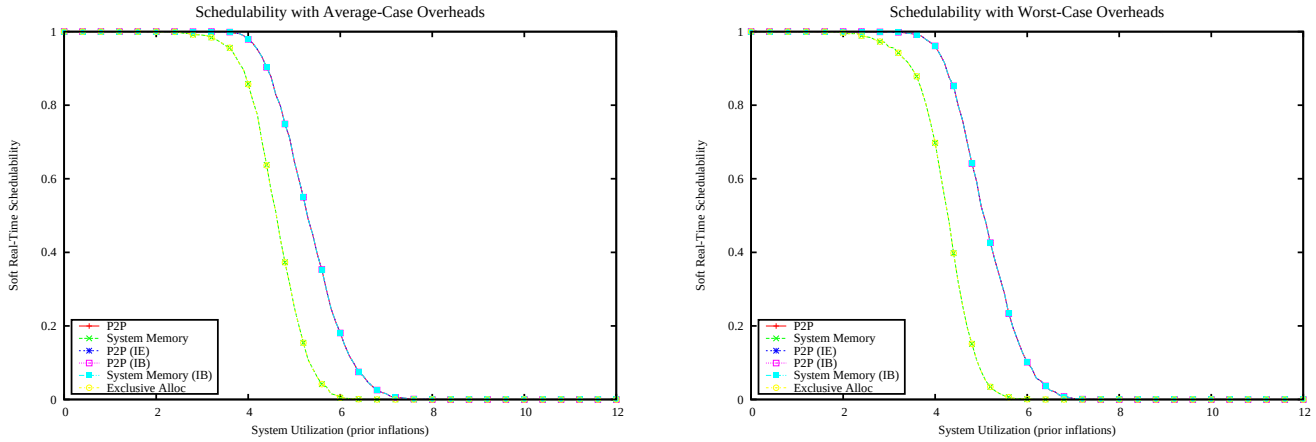

Figure 2562: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

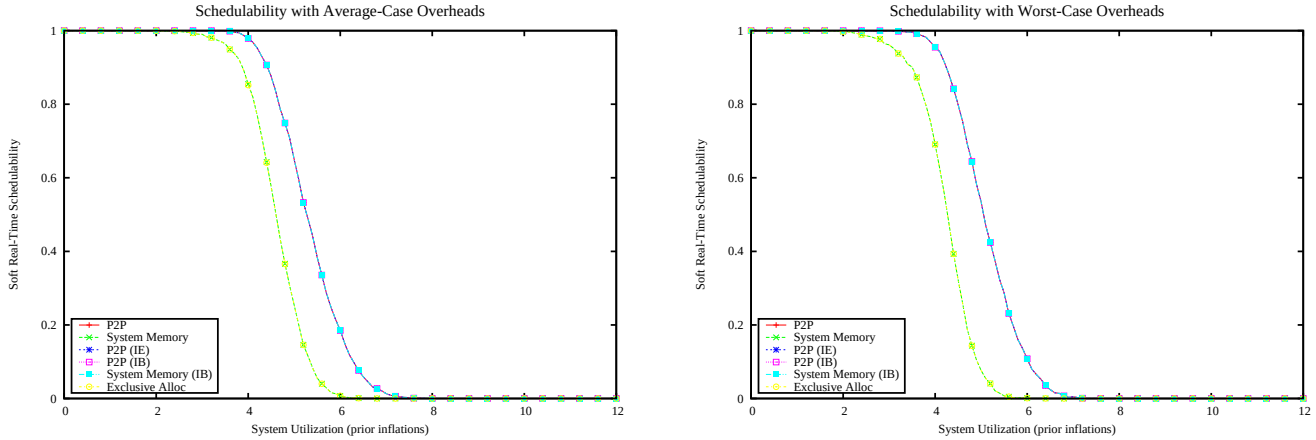

Figure 2563: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

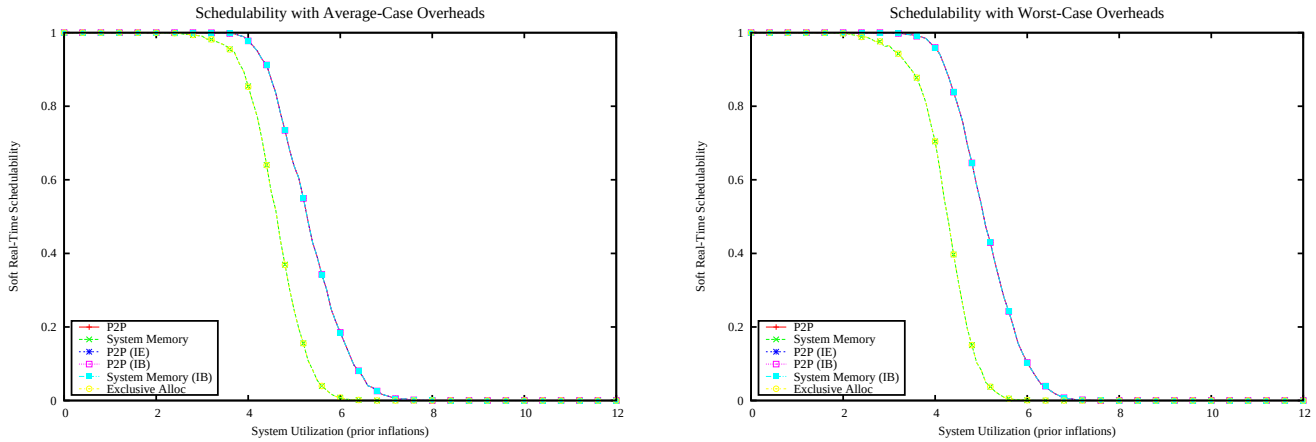

Figure 2564: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

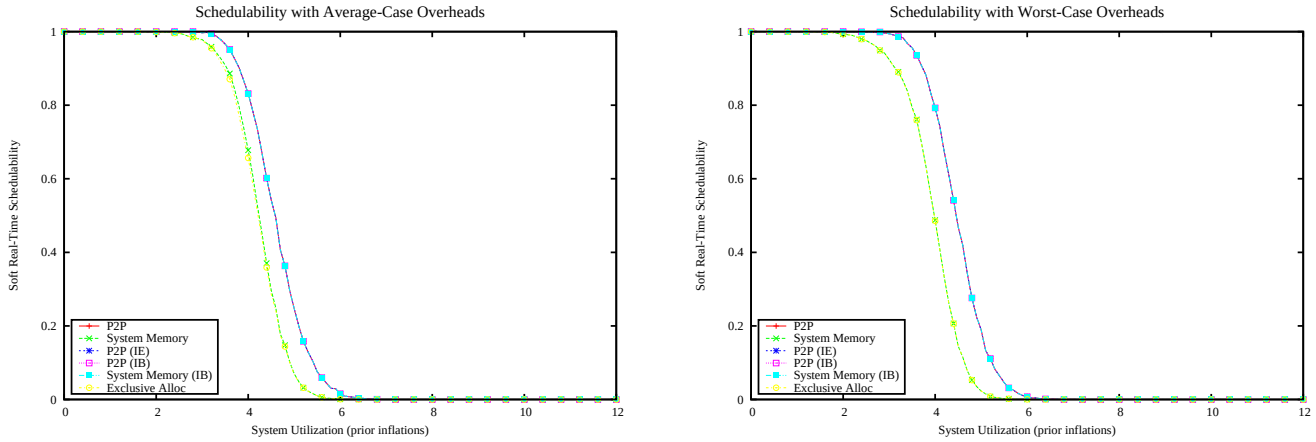

Figure 2565: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

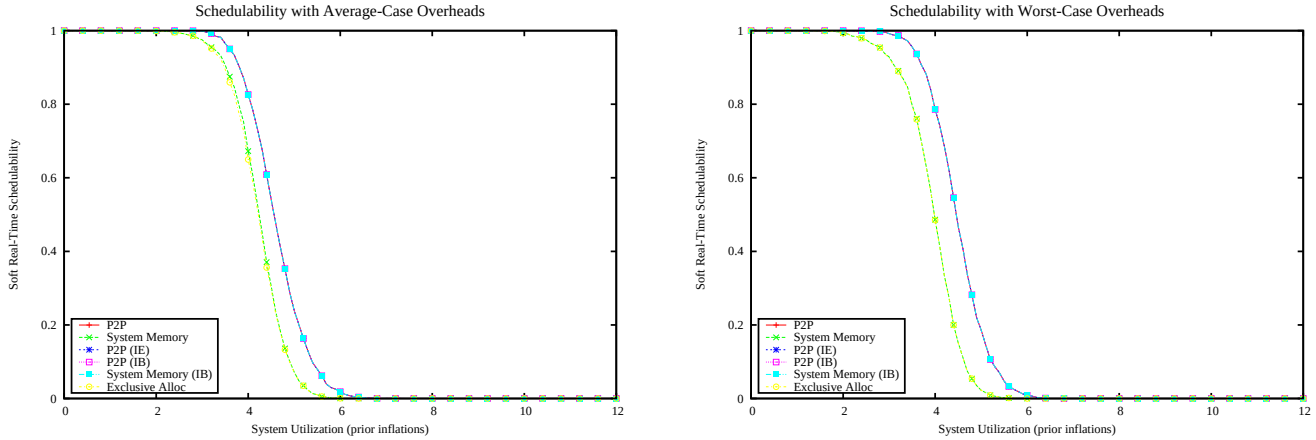

Figure 2566: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

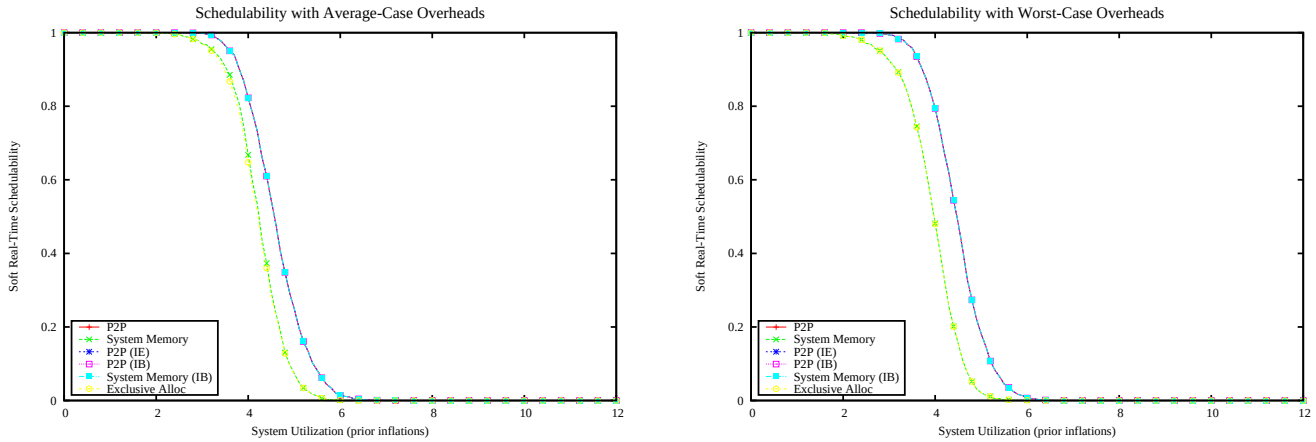

Figure 2567: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

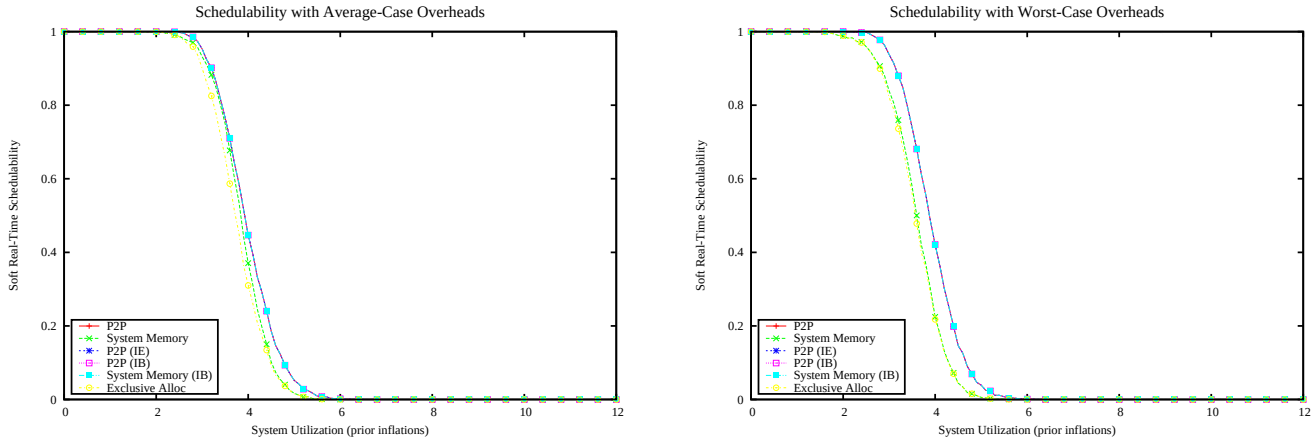

Figure 2568: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

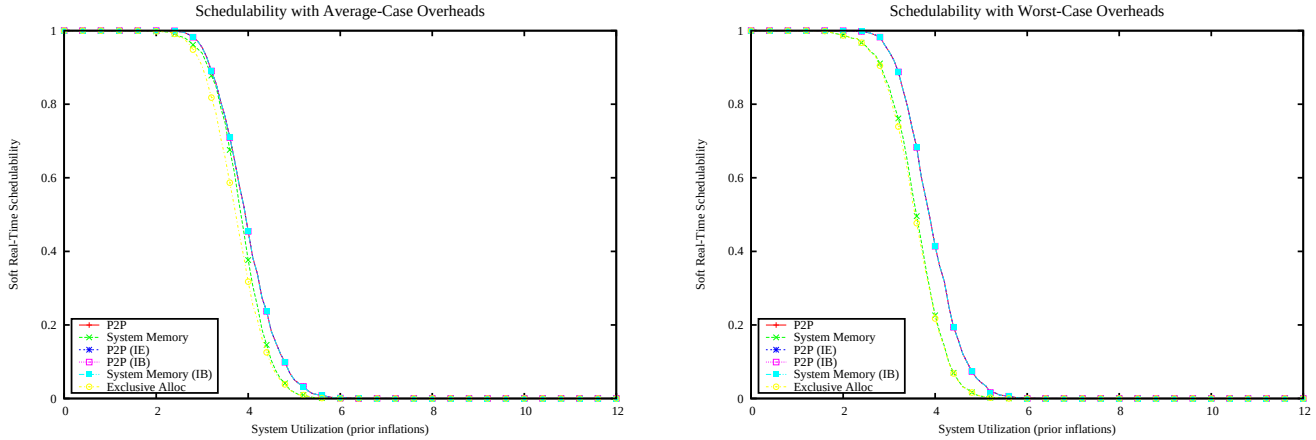

Figure 2569: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

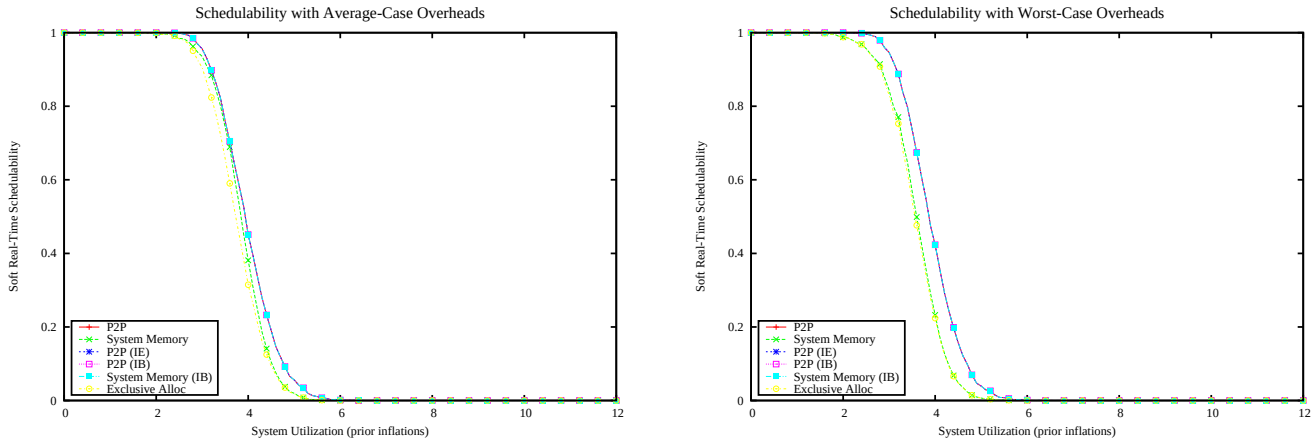

Figure 2570: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

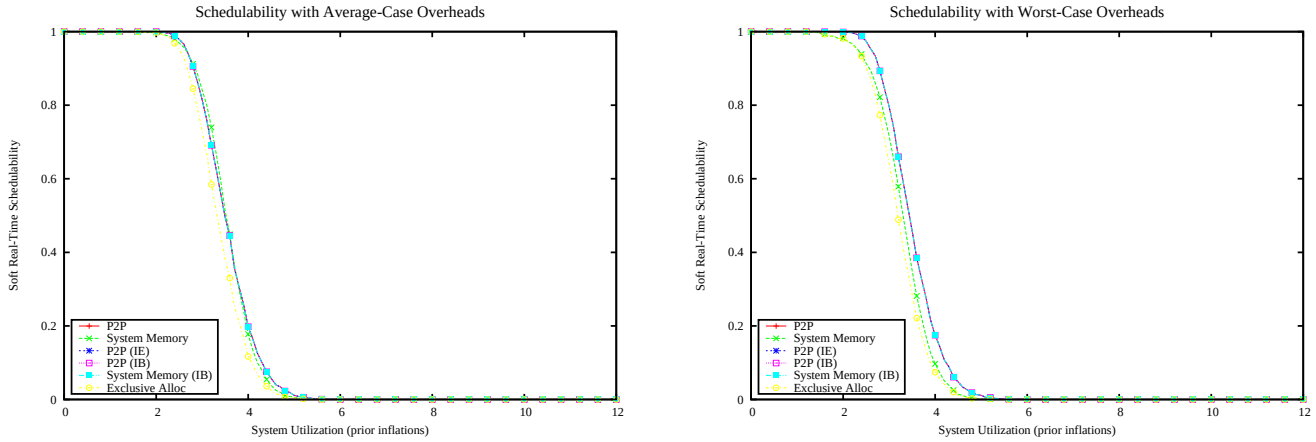

Figure 2571: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

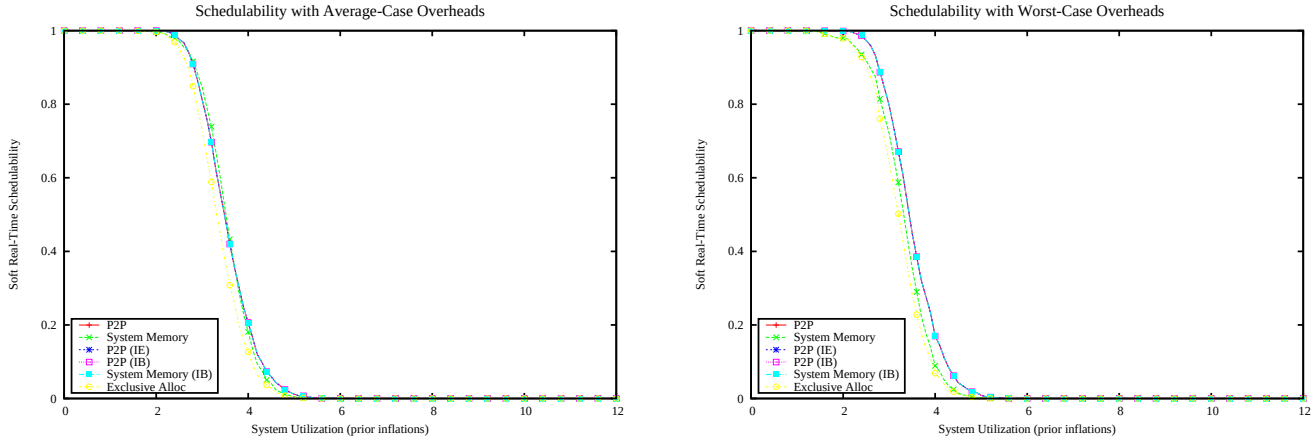

Figure 2572: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

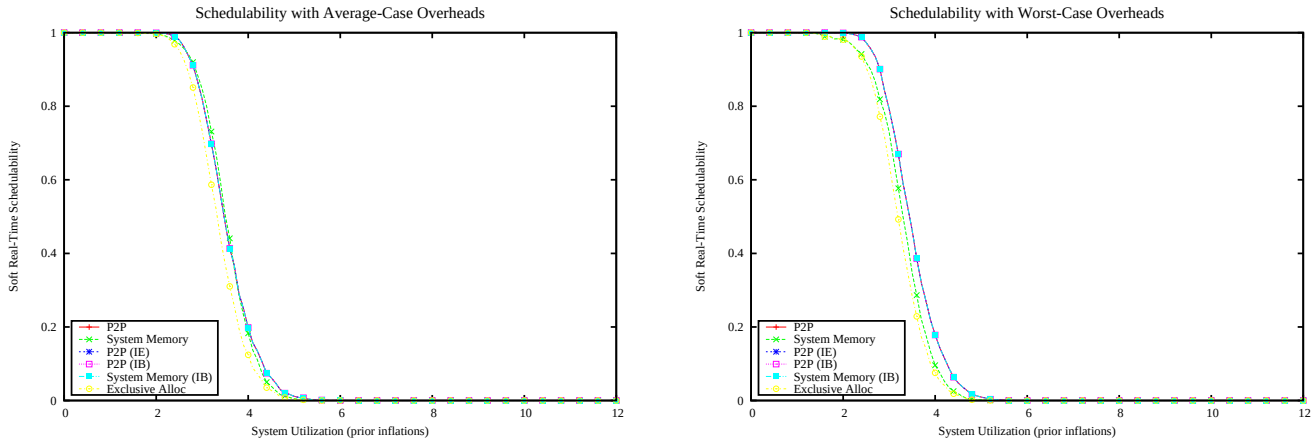

Figure 2573: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

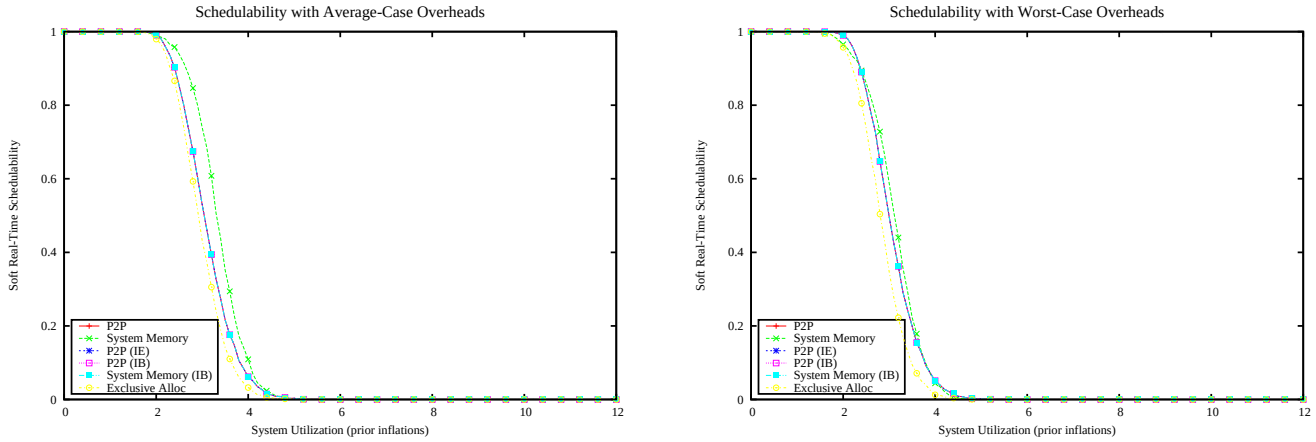

Figure 2574: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

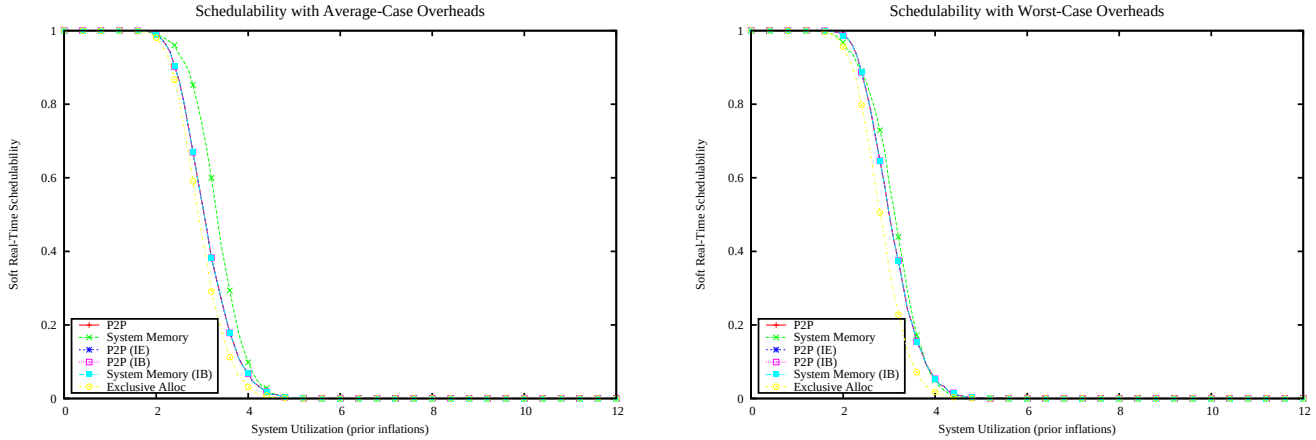

Figure 2575: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

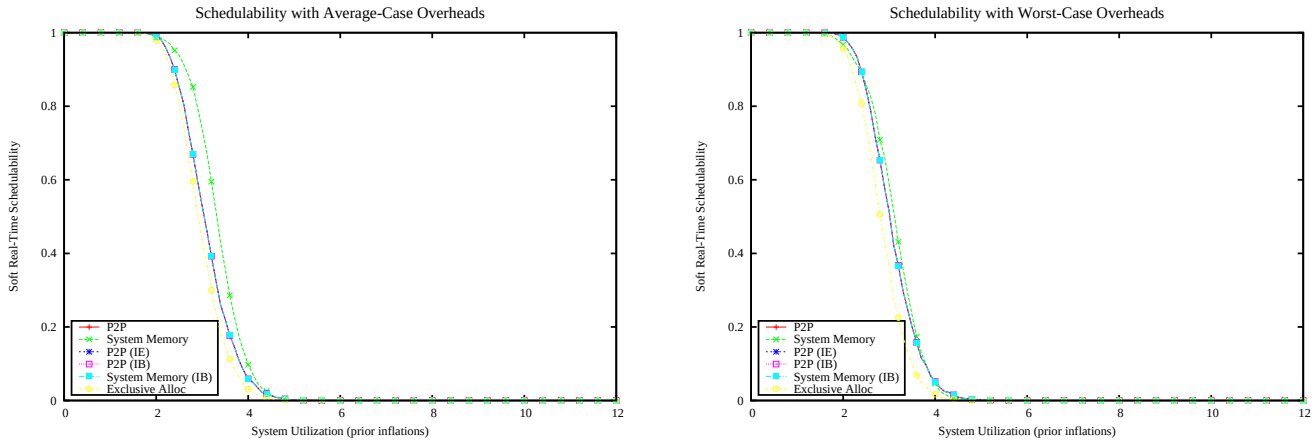

Figure 2576: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

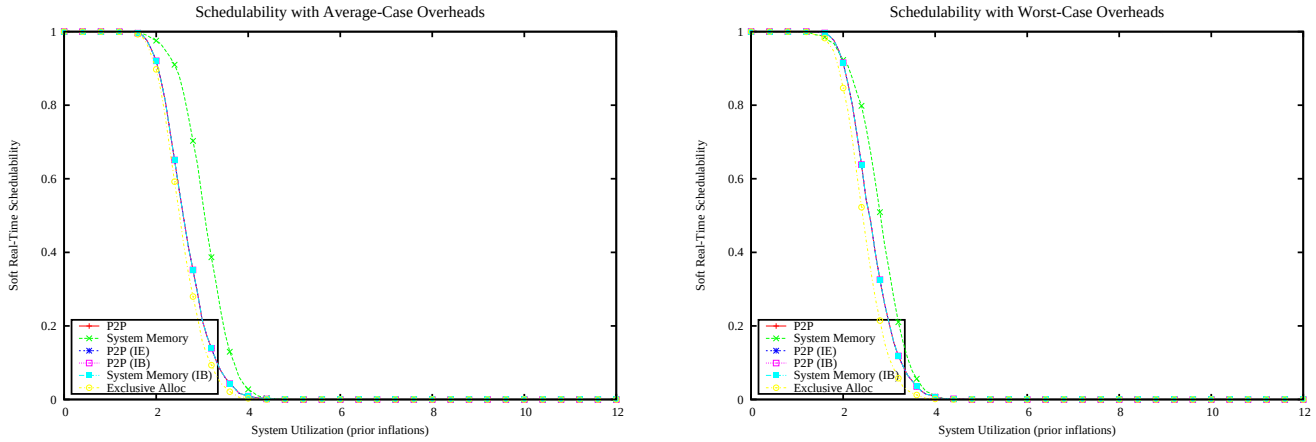

Figure 2577: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

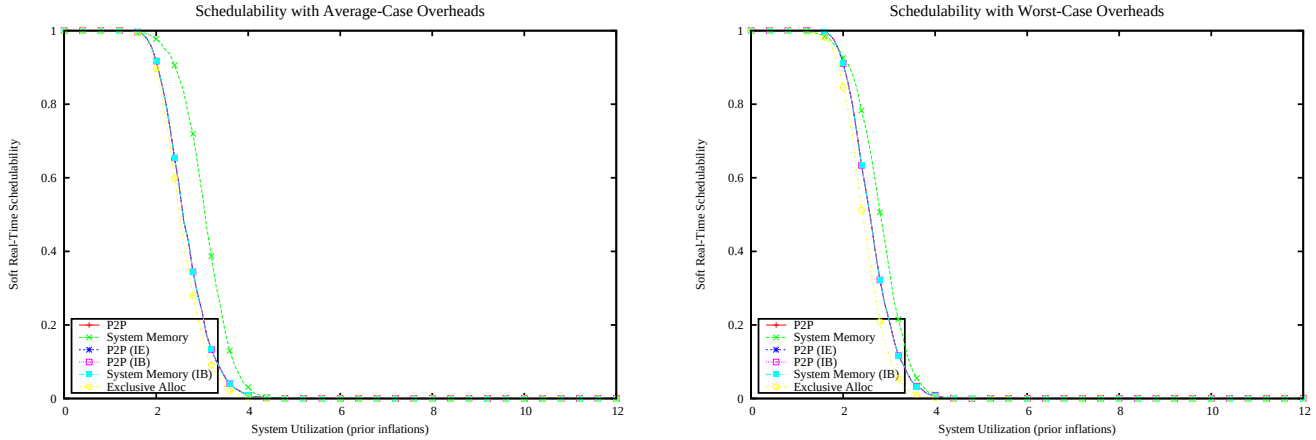

Figure 2578: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

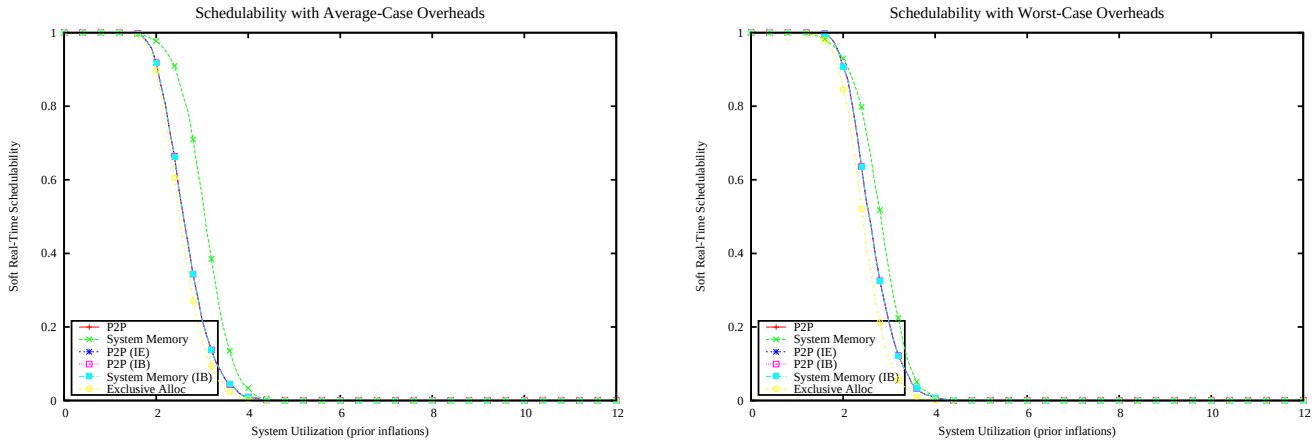

Figure 2579: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

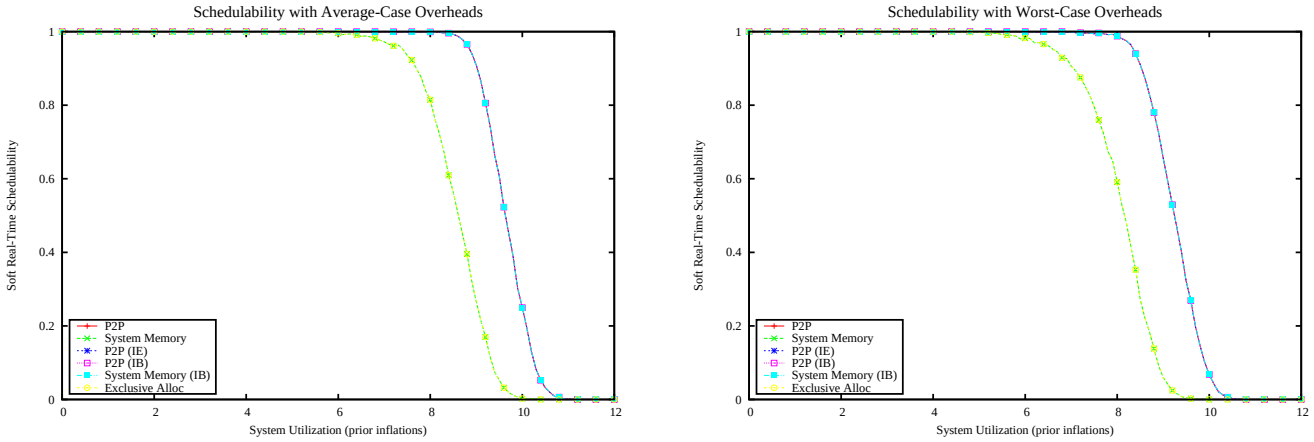

Figure 2580: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

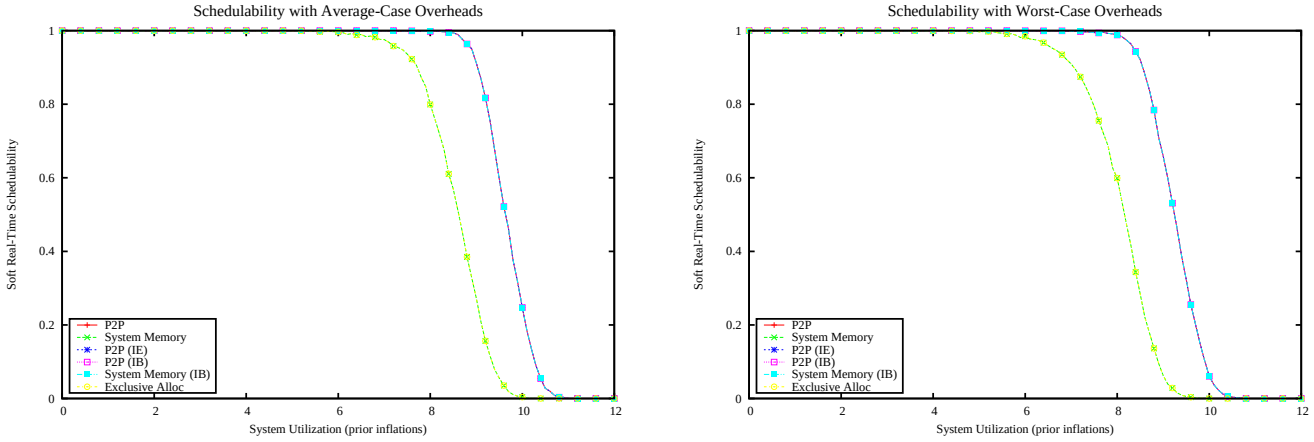

Figure 2581: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

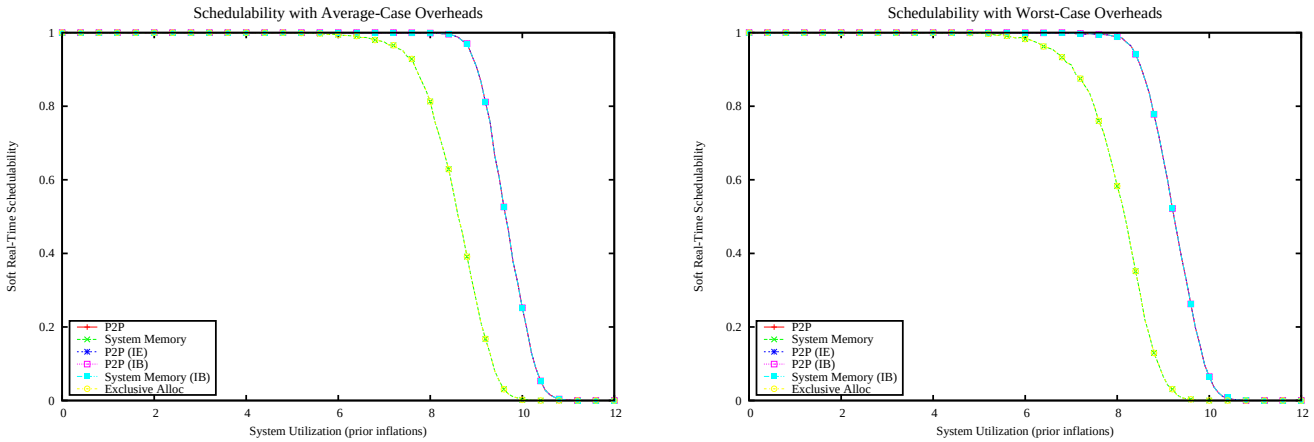

Figure 2582: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

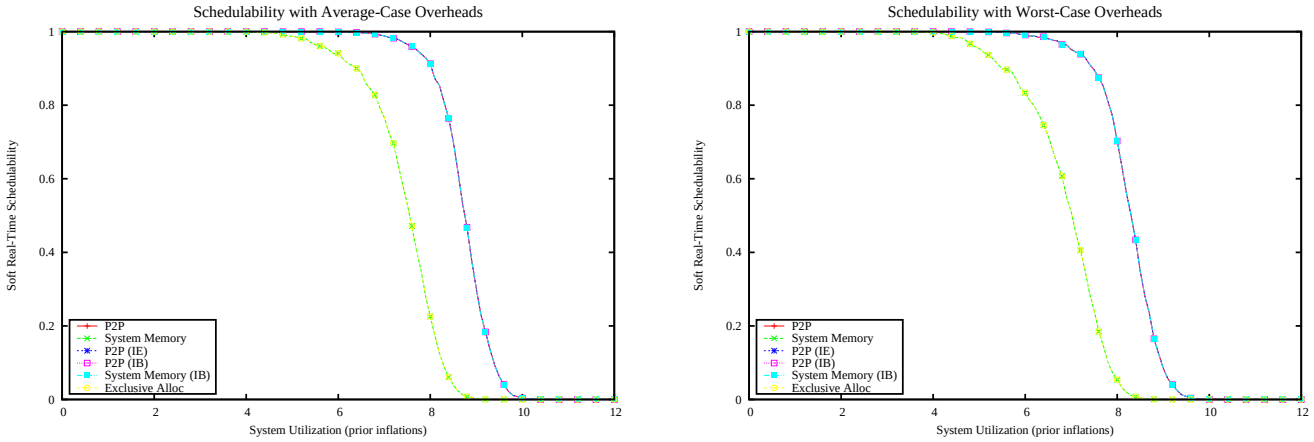

Figure 2583: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

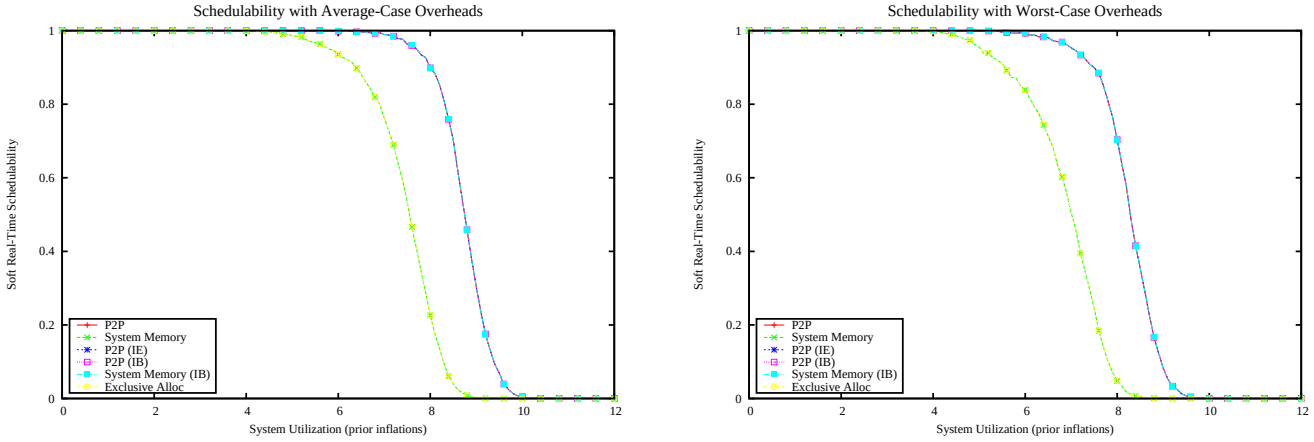

Figure 2584: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

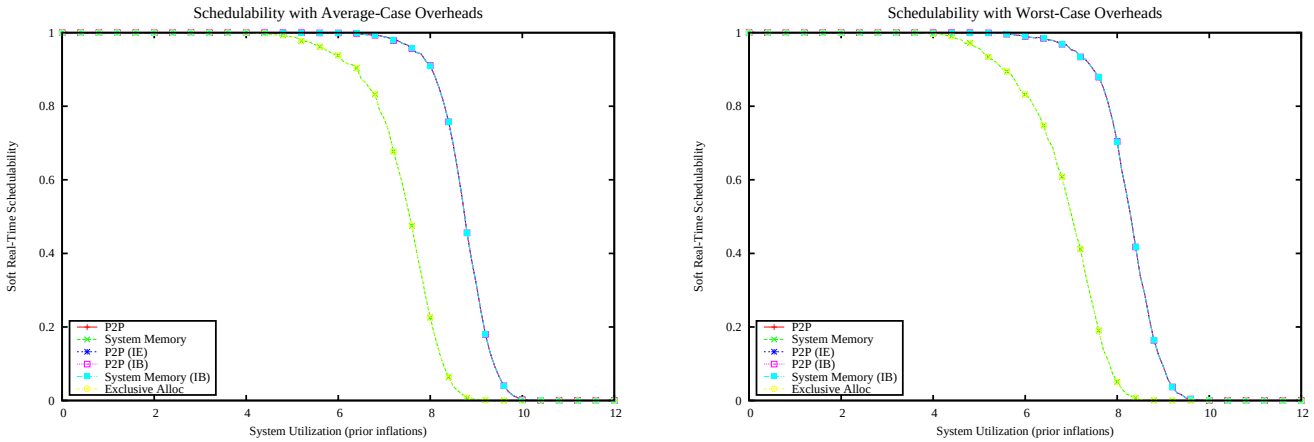

Figure 2585: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

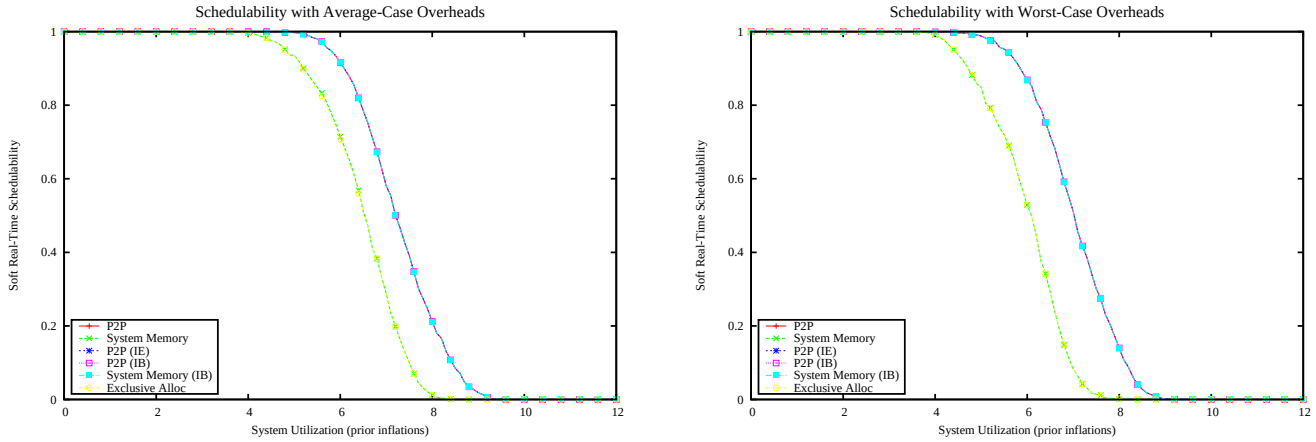

Figure 2586: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

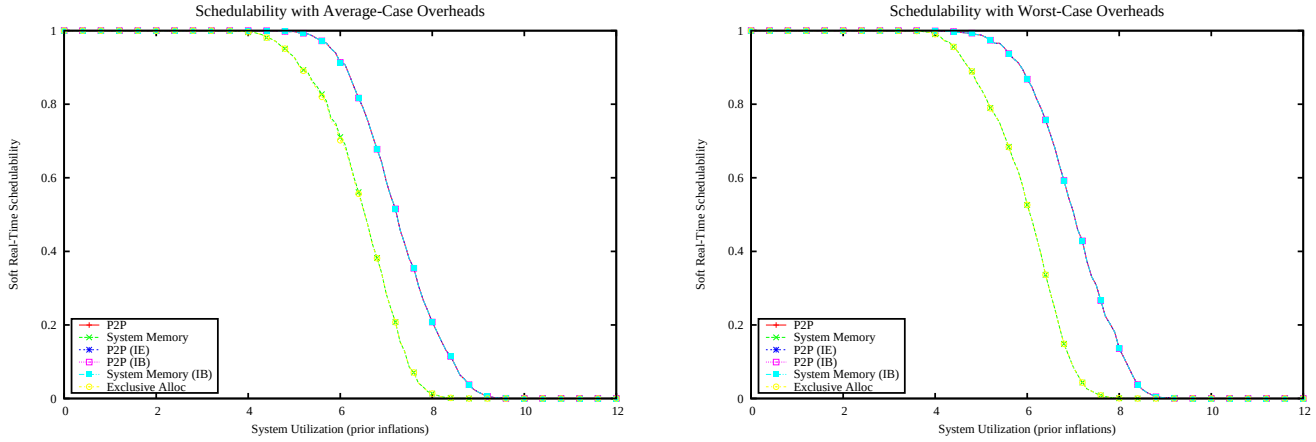

Figure 2587: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

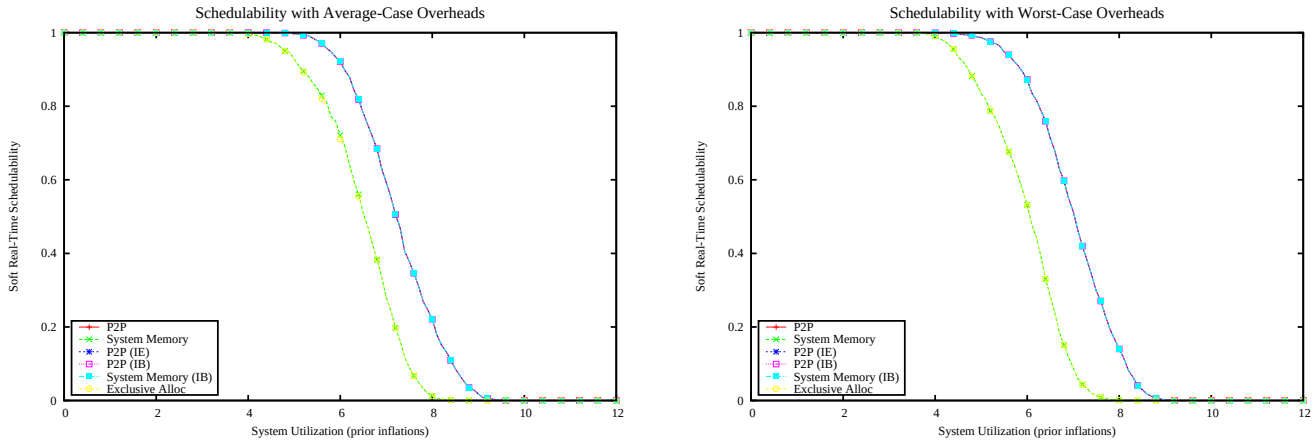

Figure 2588: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

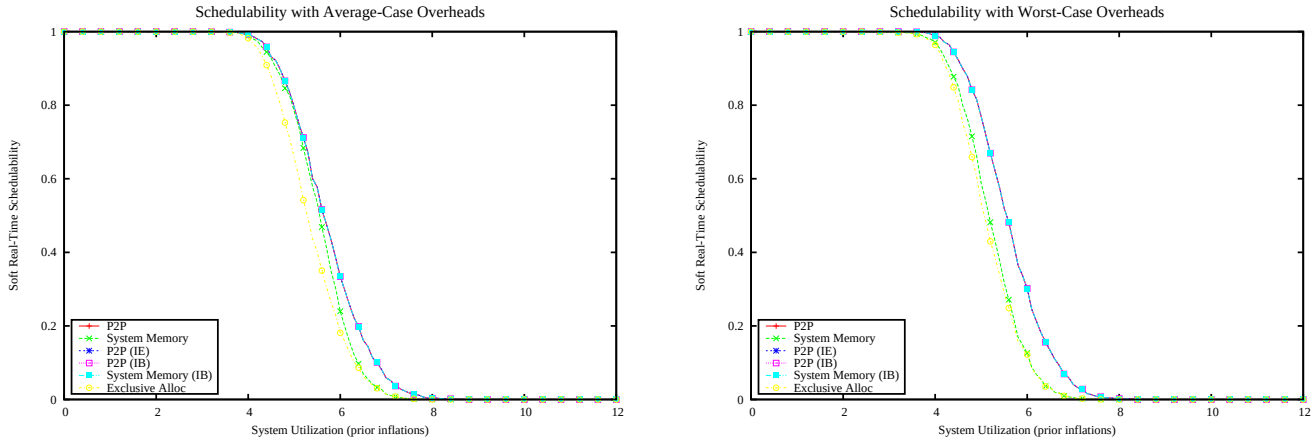

Figure 2589: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

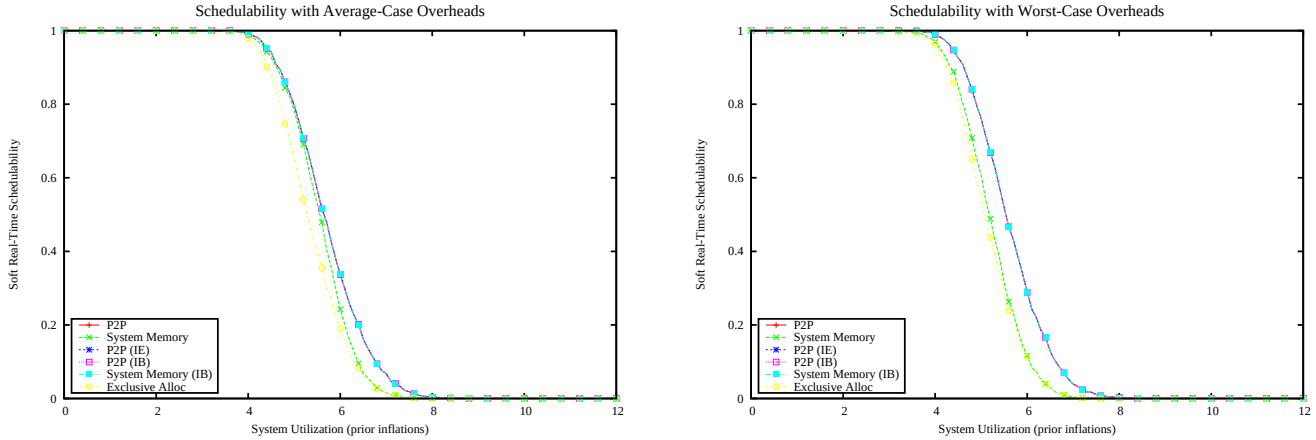

Figure 2590: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

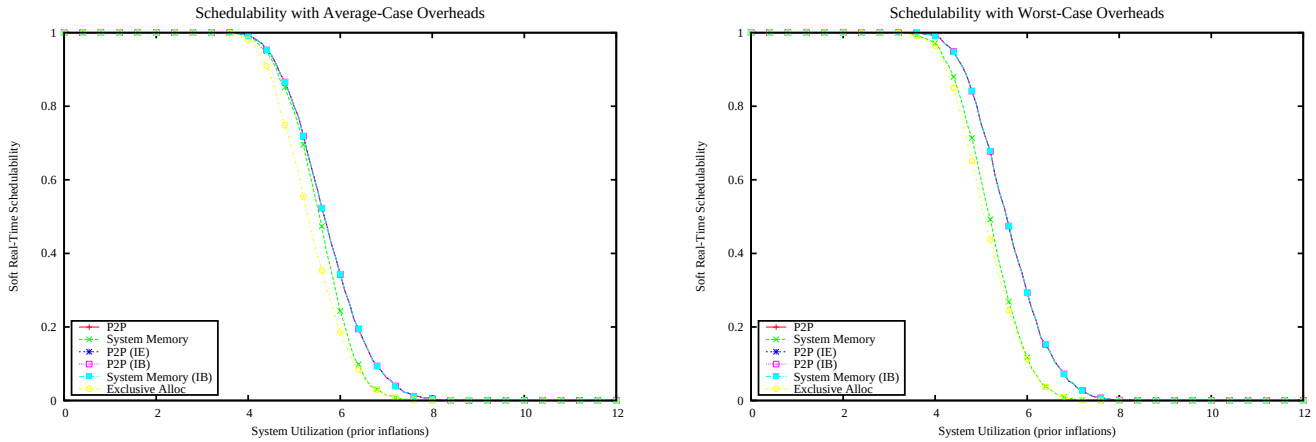

Figure 2591: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

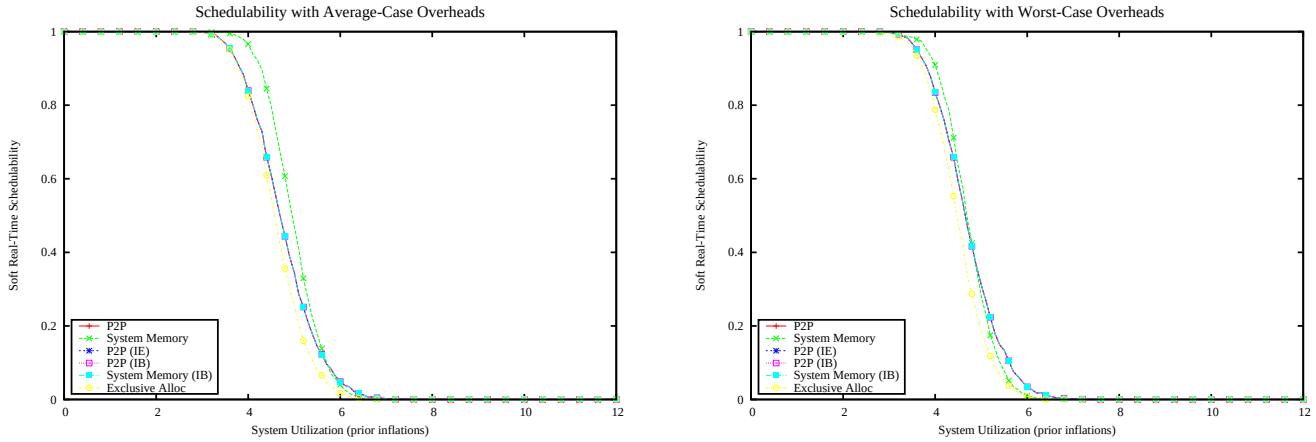

Figure 2592: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

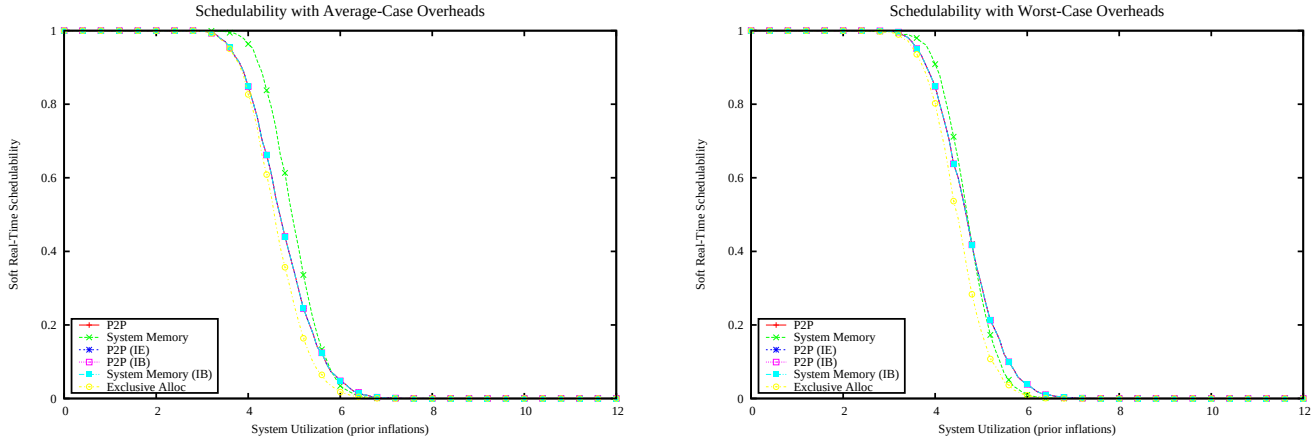

Figure 2593: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

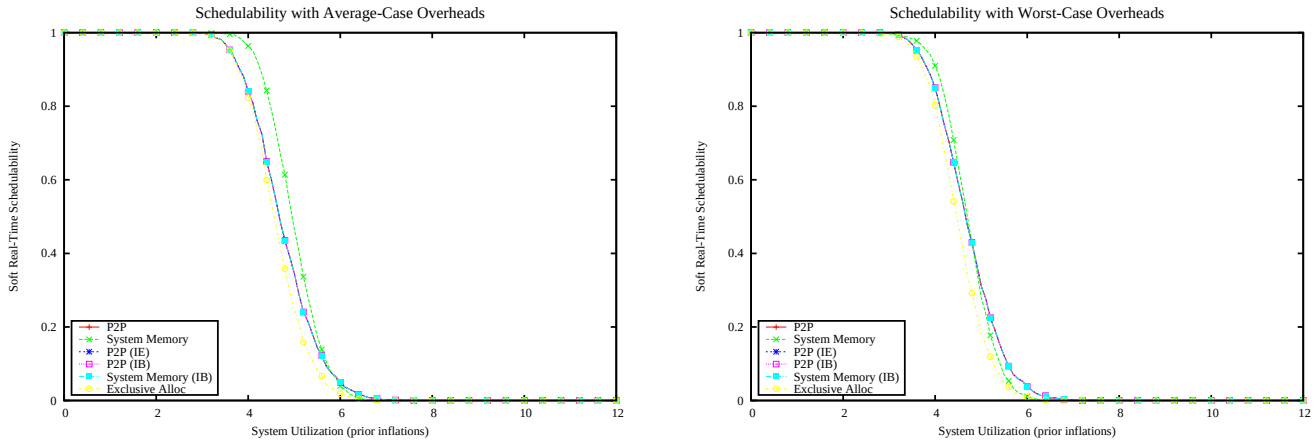

Figure 2594: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

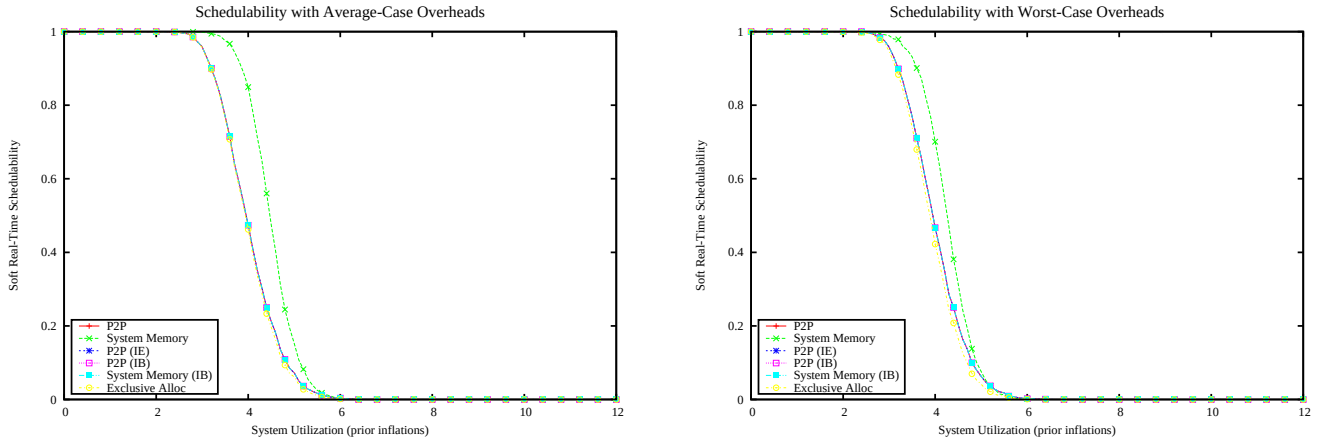

Figure 2595: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

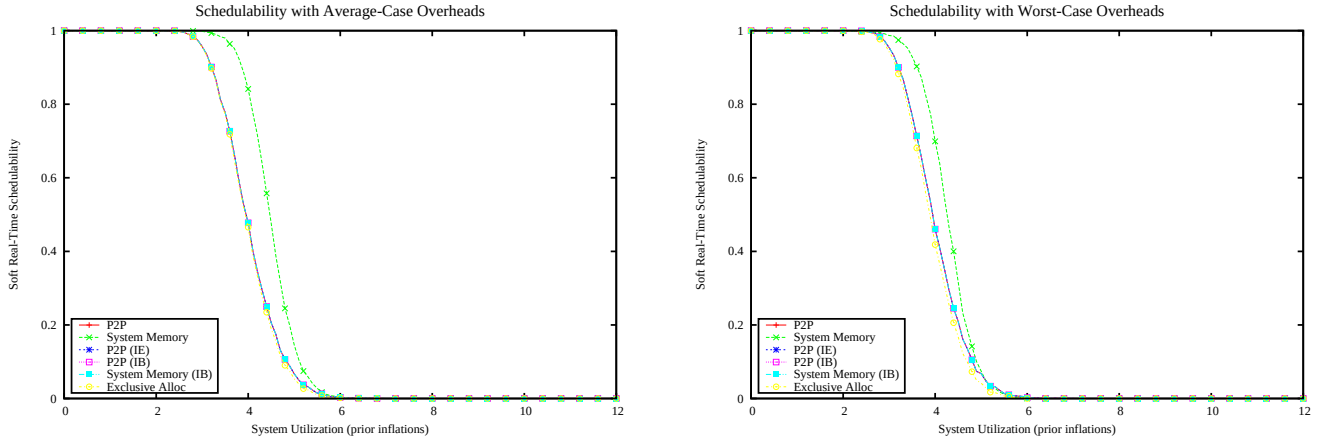

Figure 2596: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

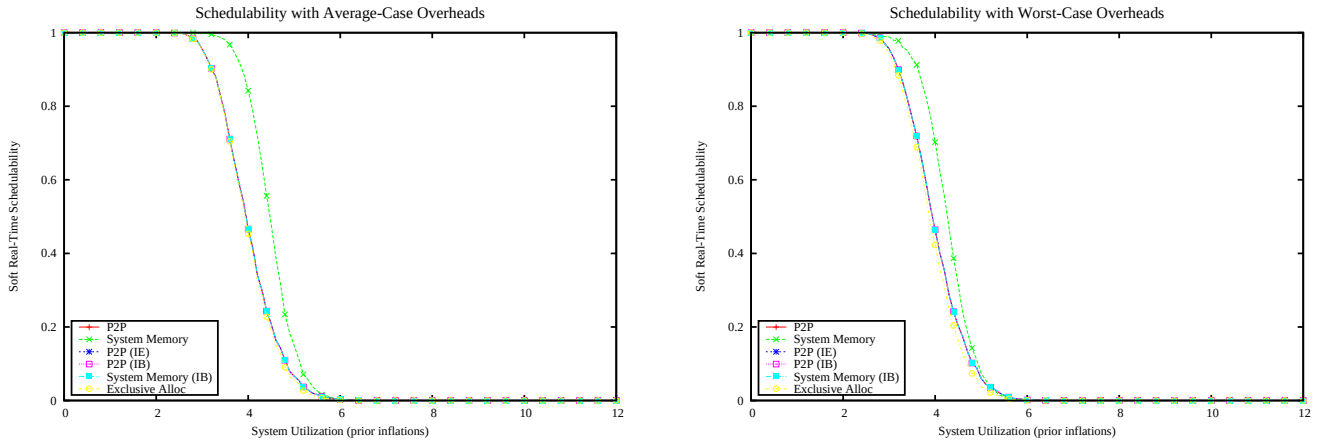

Figure 2597: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

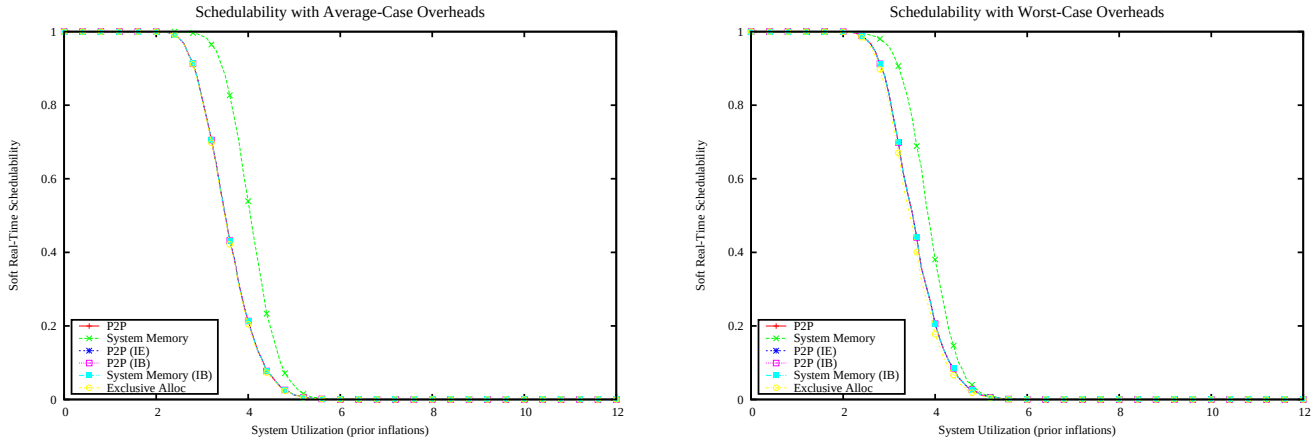

Figure 2598: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

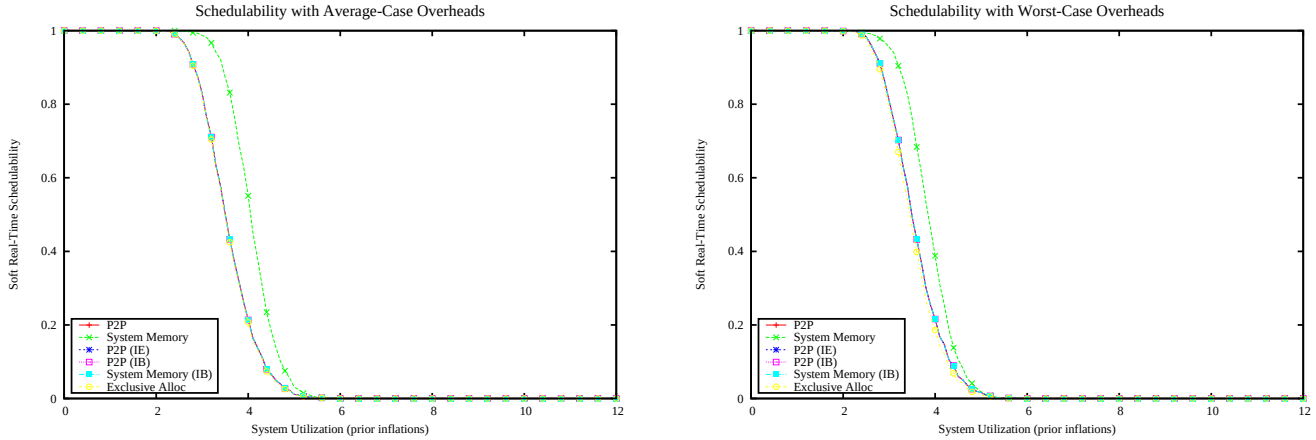

Figure 2599: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

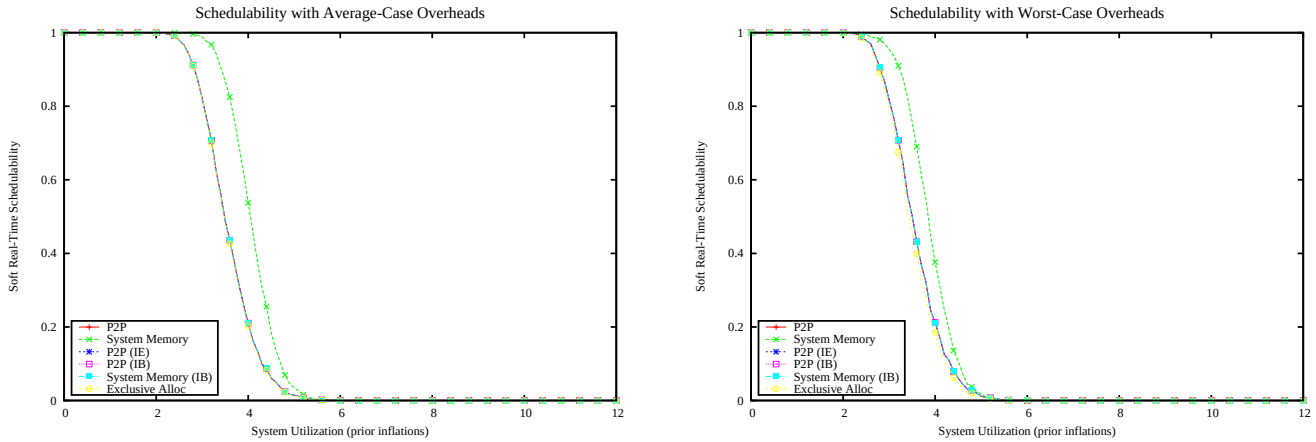

Figure 2600: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

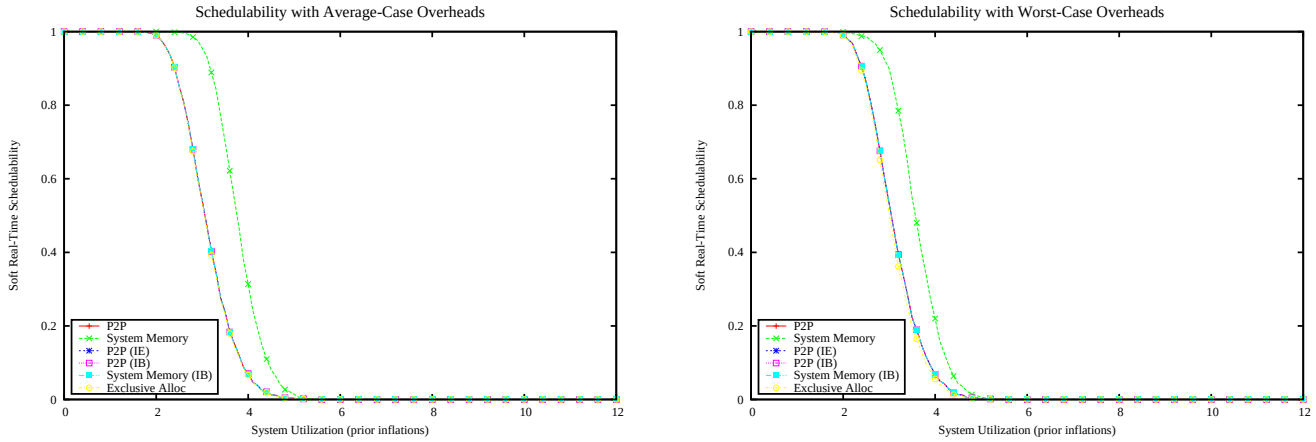

Figure 2601: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

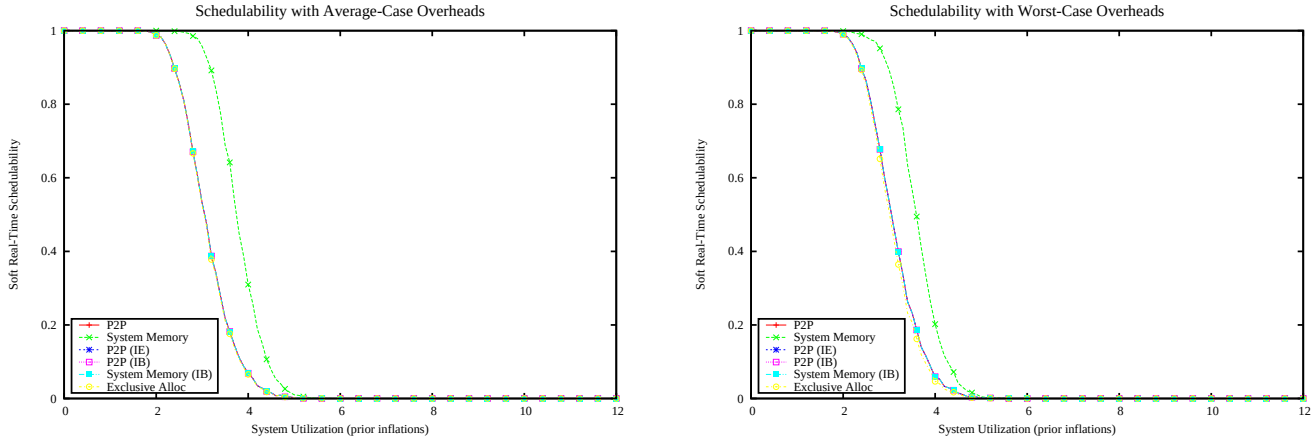

Figure 2602: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

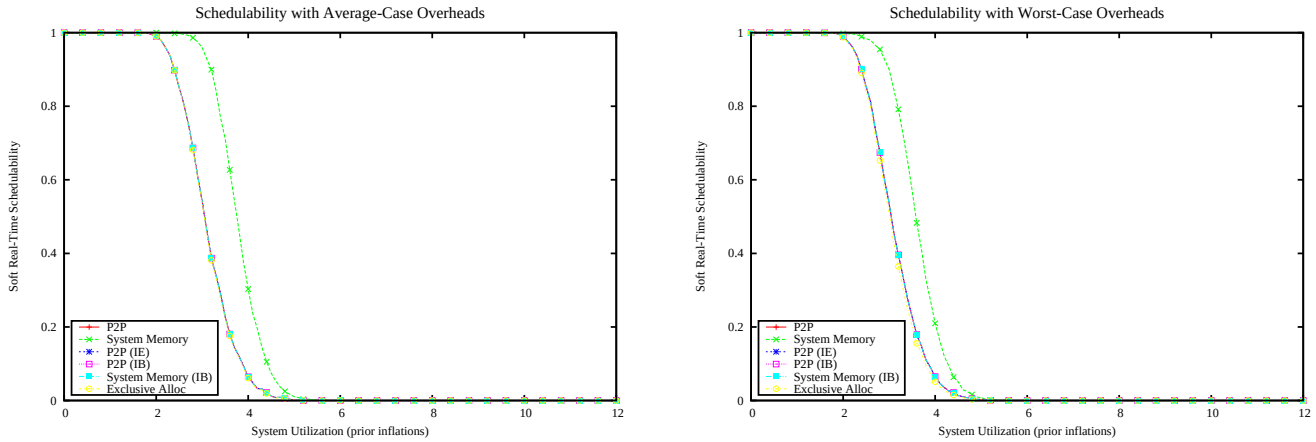

Figure 2603: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

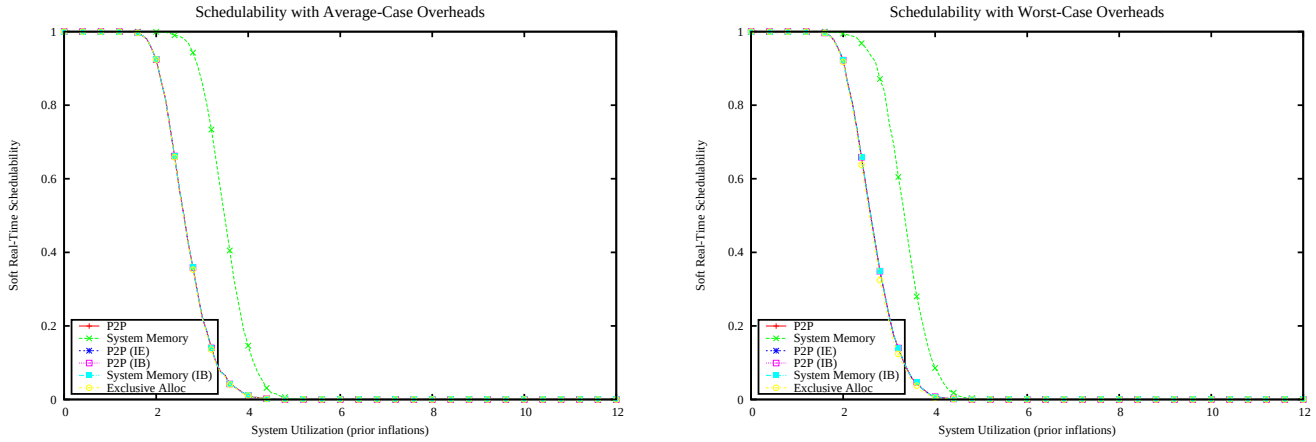

Figure 2604: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

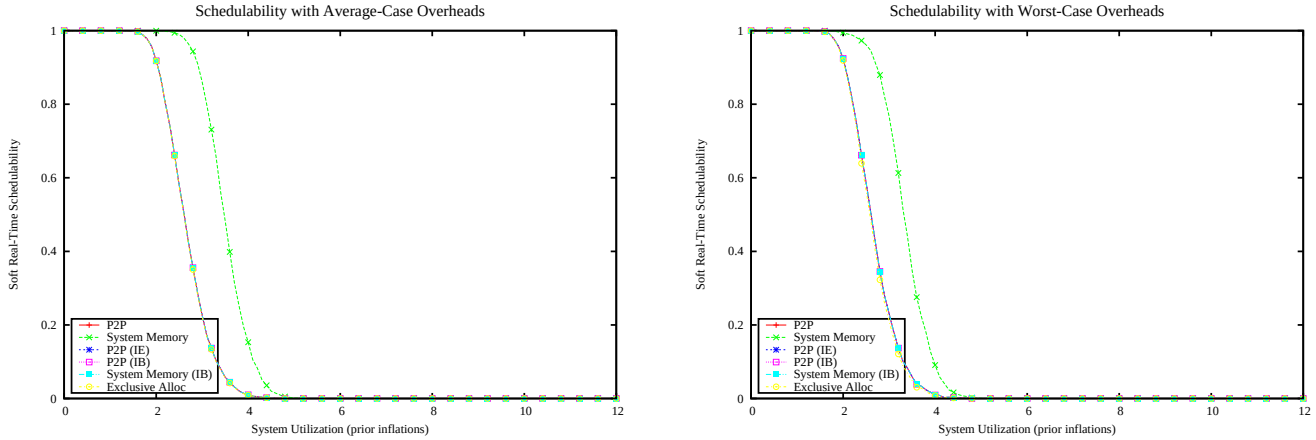

Figure 2605: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

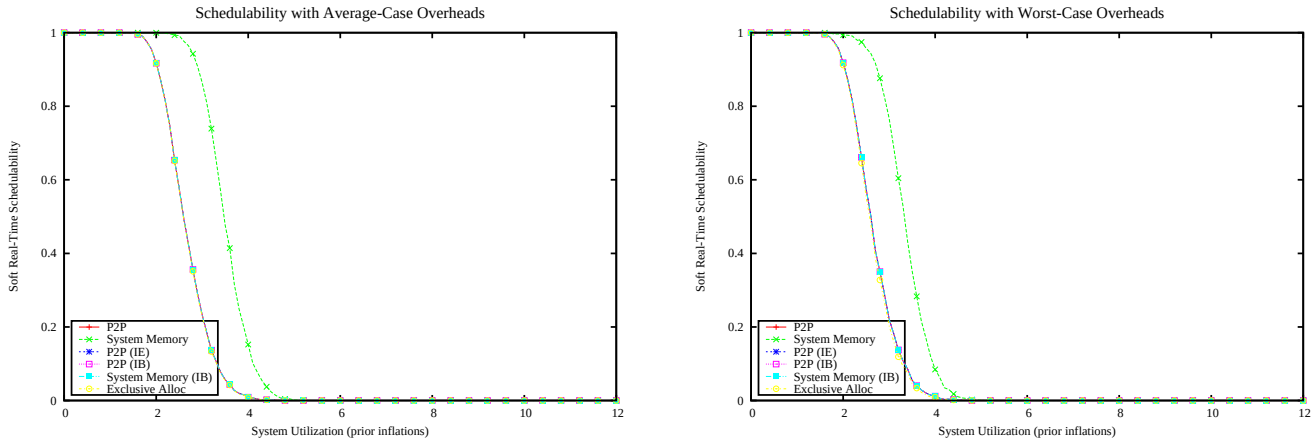

Figure 2606: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

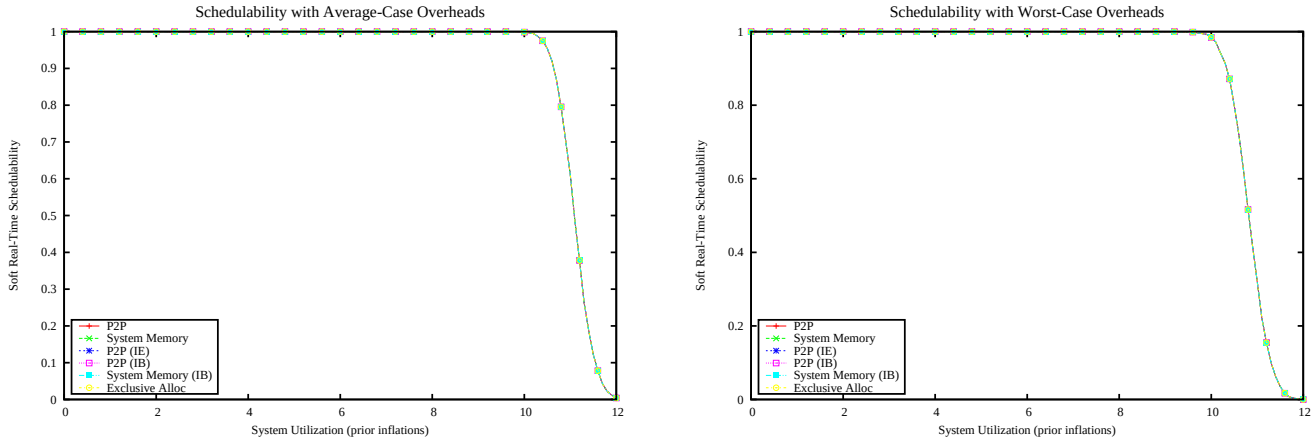

Figure 2607: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

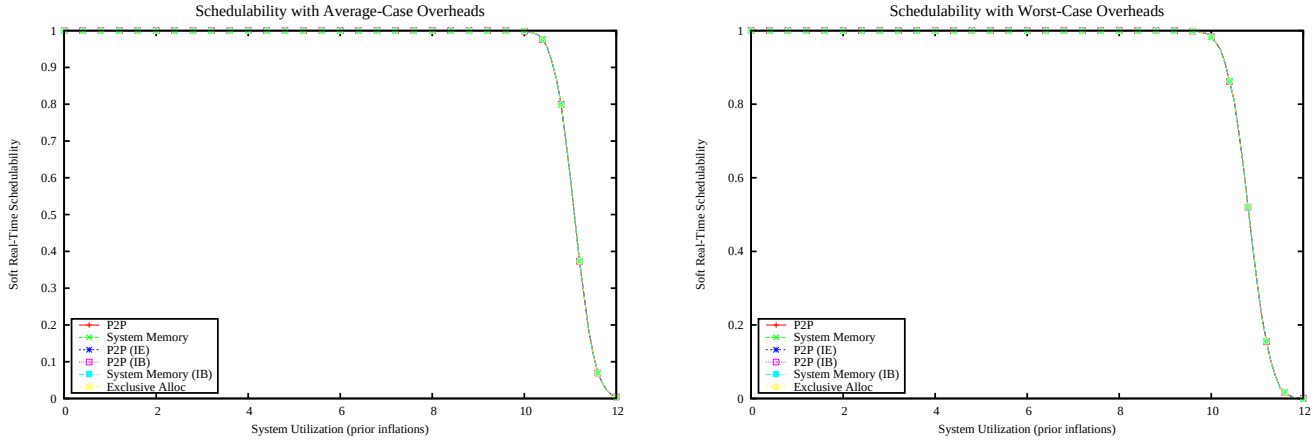

Figure 2608: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

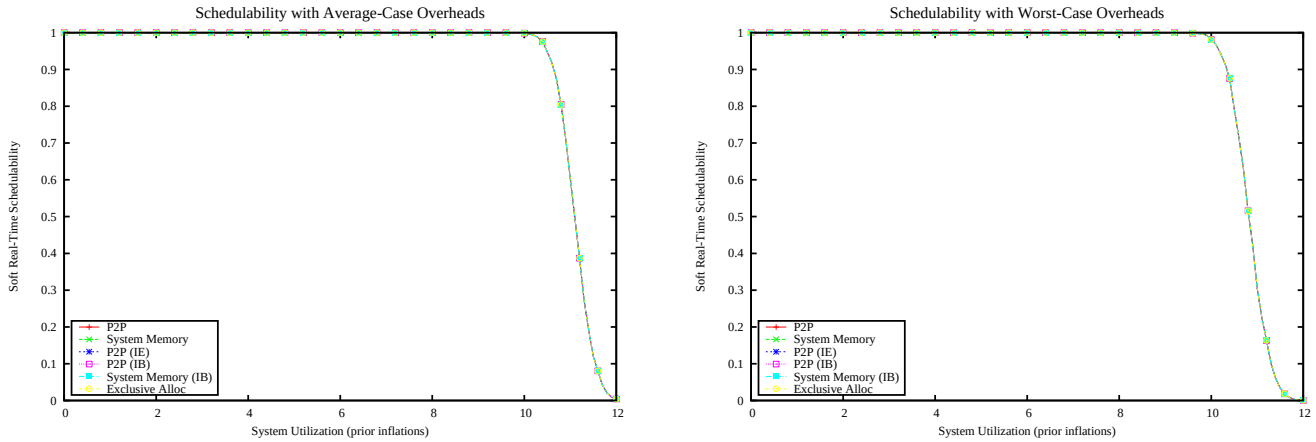

Figure 2609: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

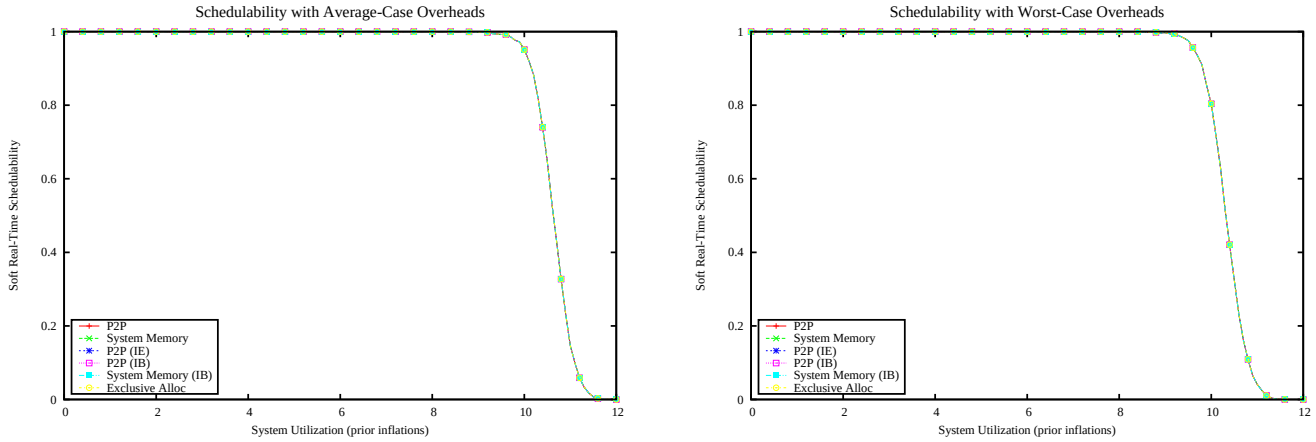

Figure 2610: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

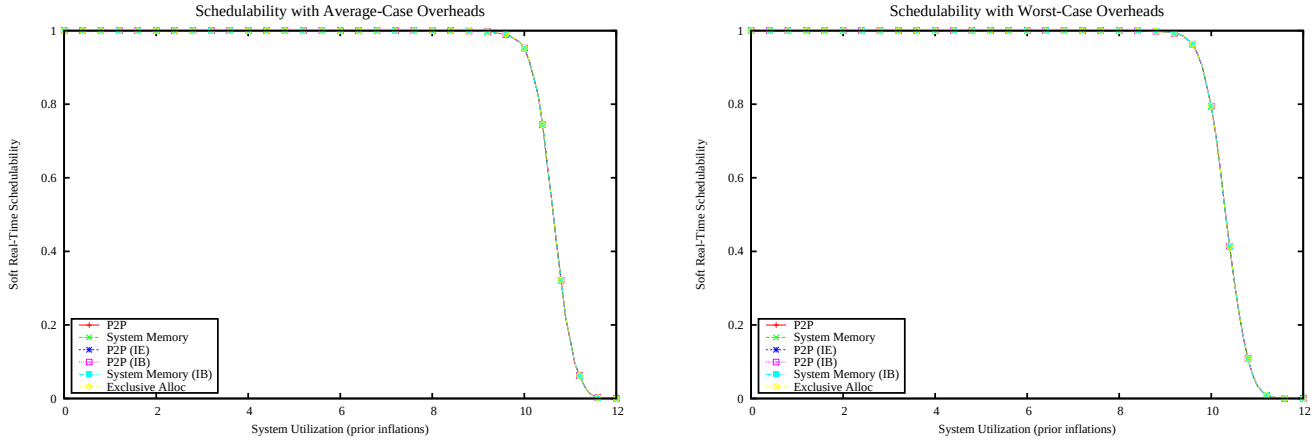

Figure 2611: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

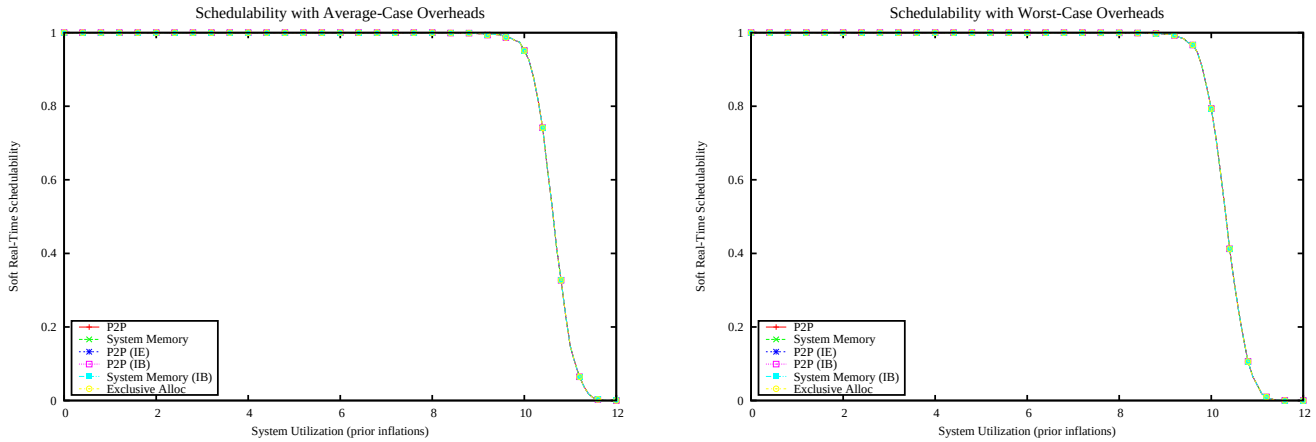

Figure 2612: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

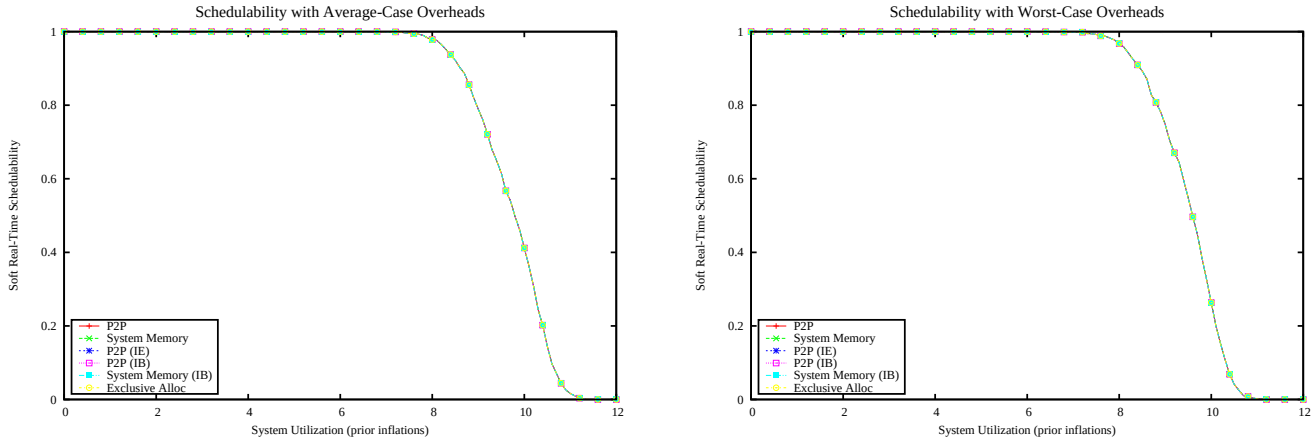

Figure 2613: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

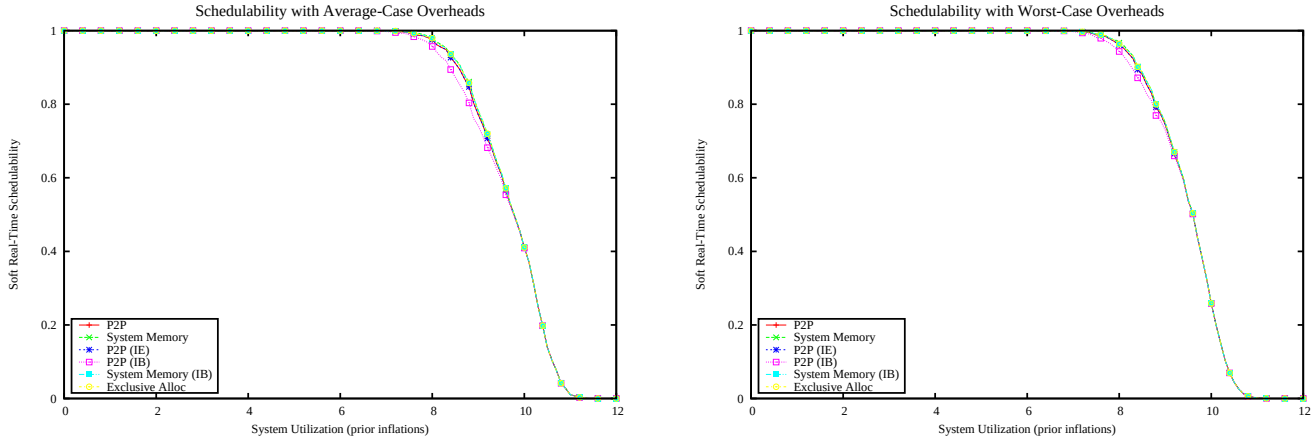

Figure 2614: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

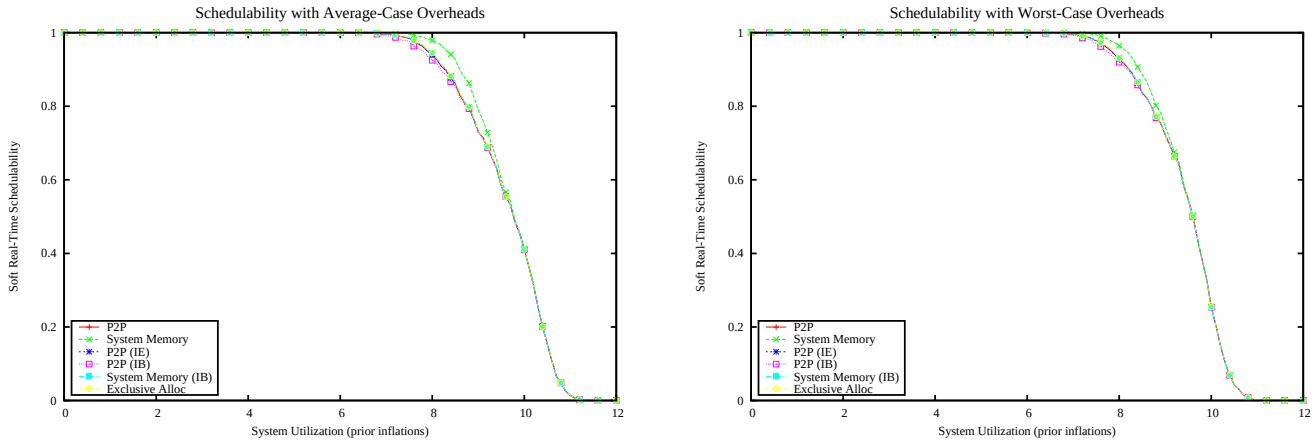

Figure 2615: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

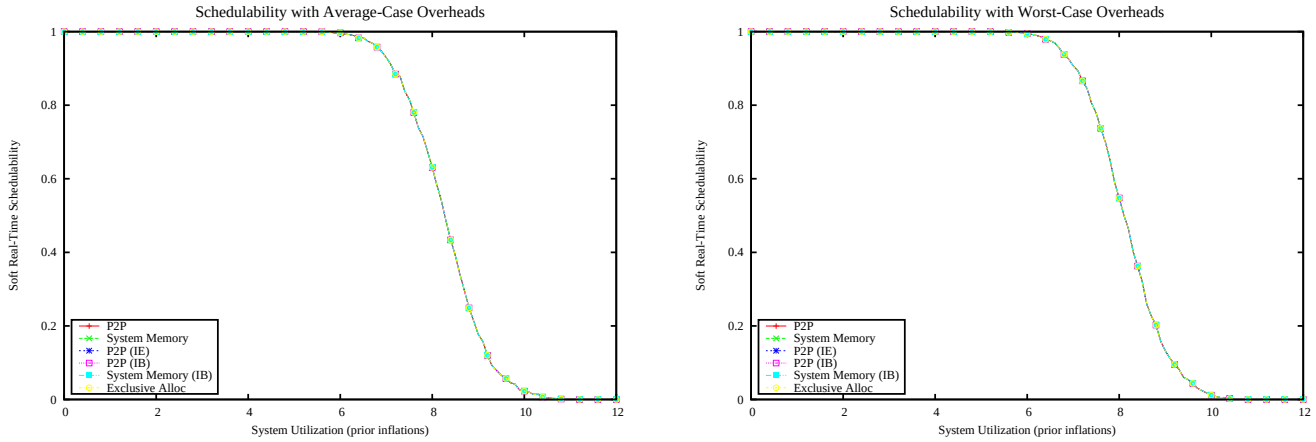

Figure 2616: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

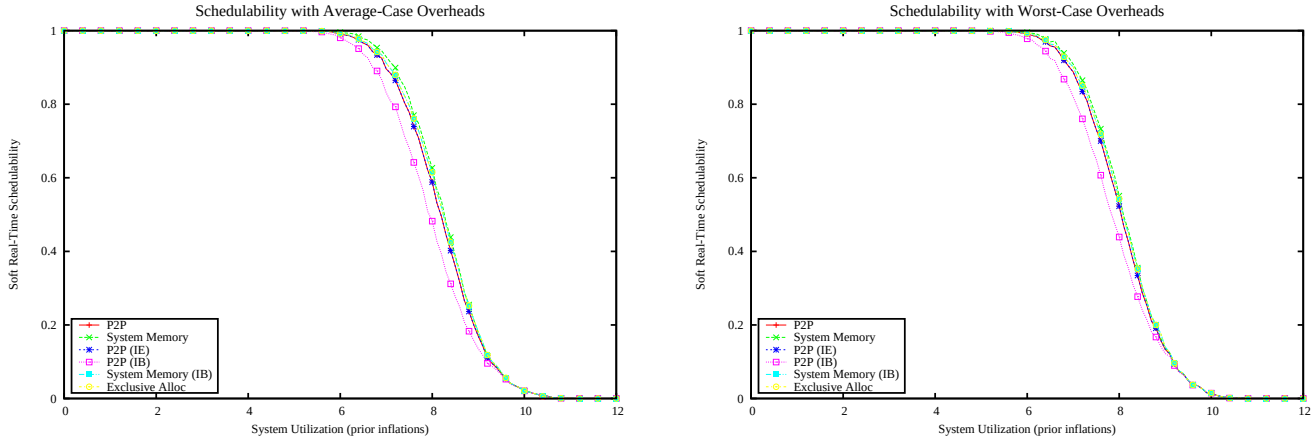

Figure 2617: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

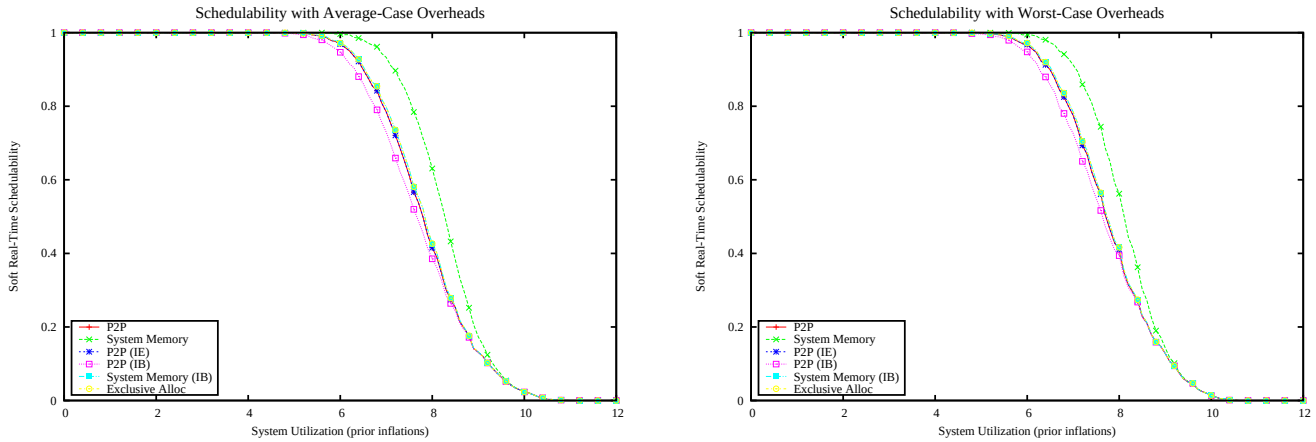

Figure 2618: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

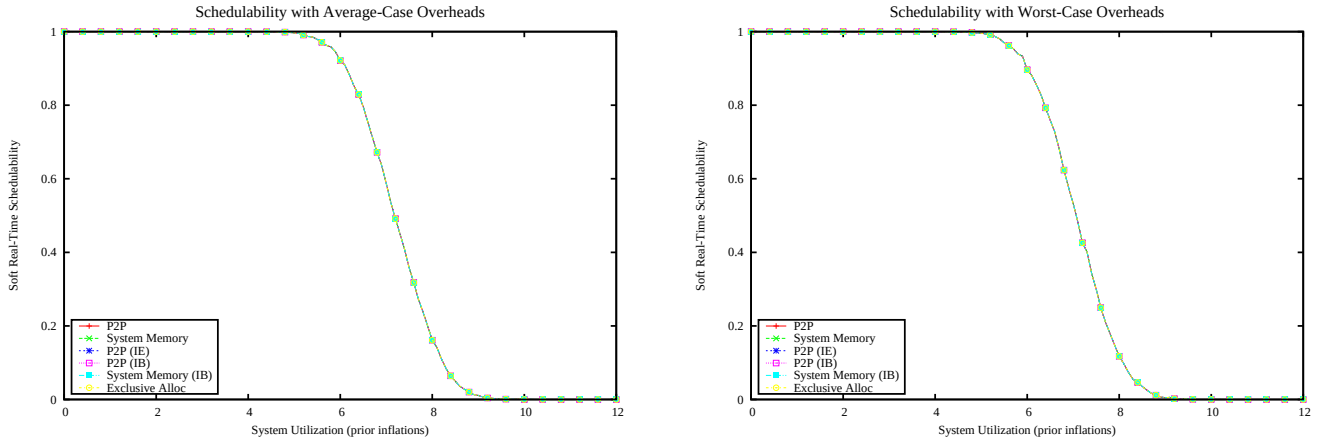

Figure 2619: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

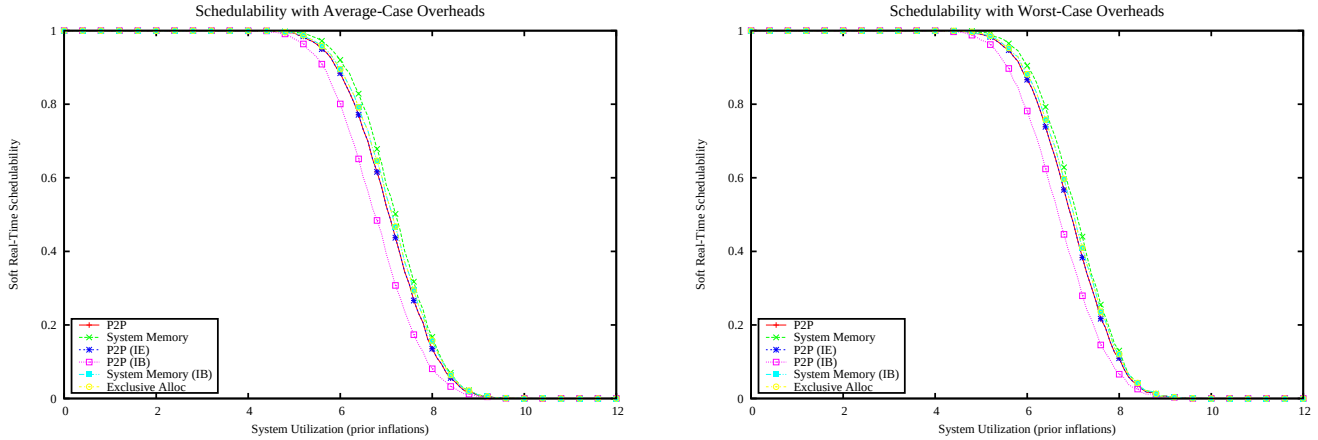

Figure 2620: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

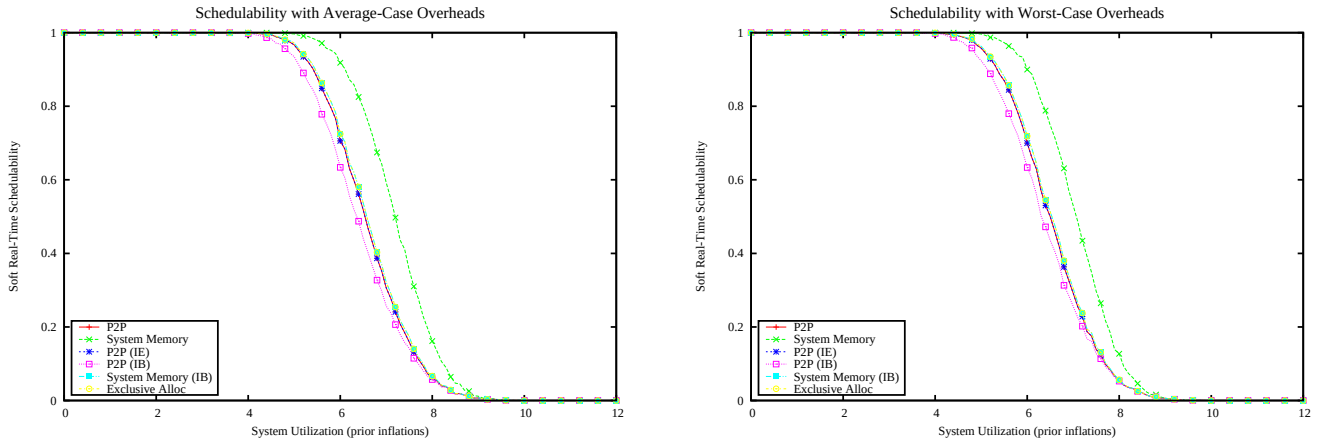

Figure 2621: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

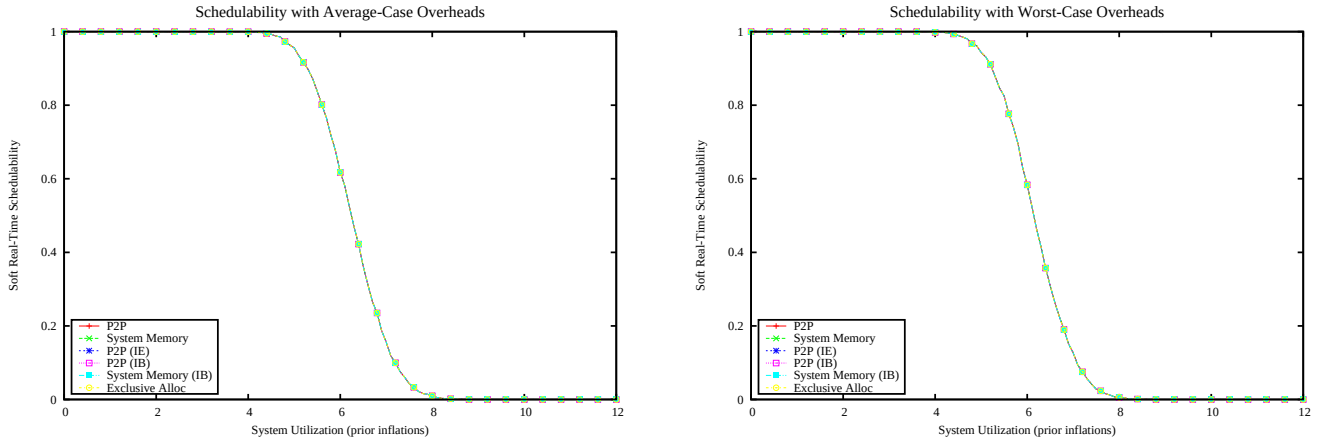

Figure 2622: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

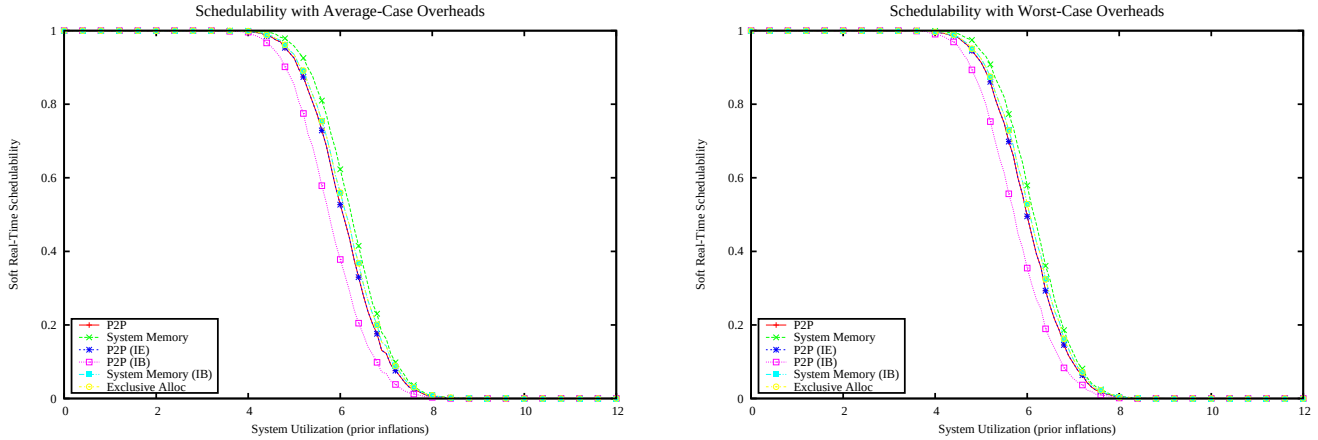

Figure 2623: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

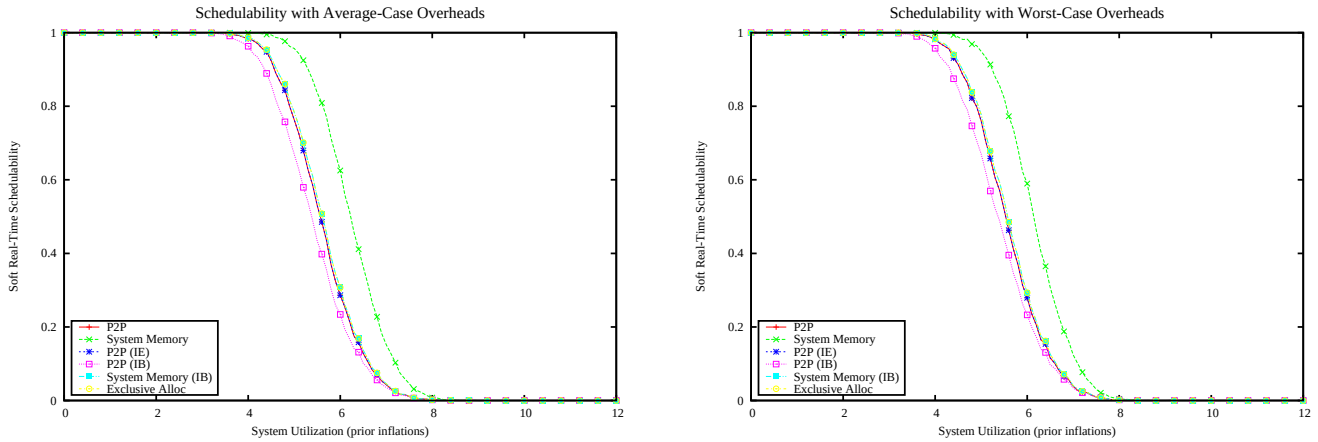

Figure 2624: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

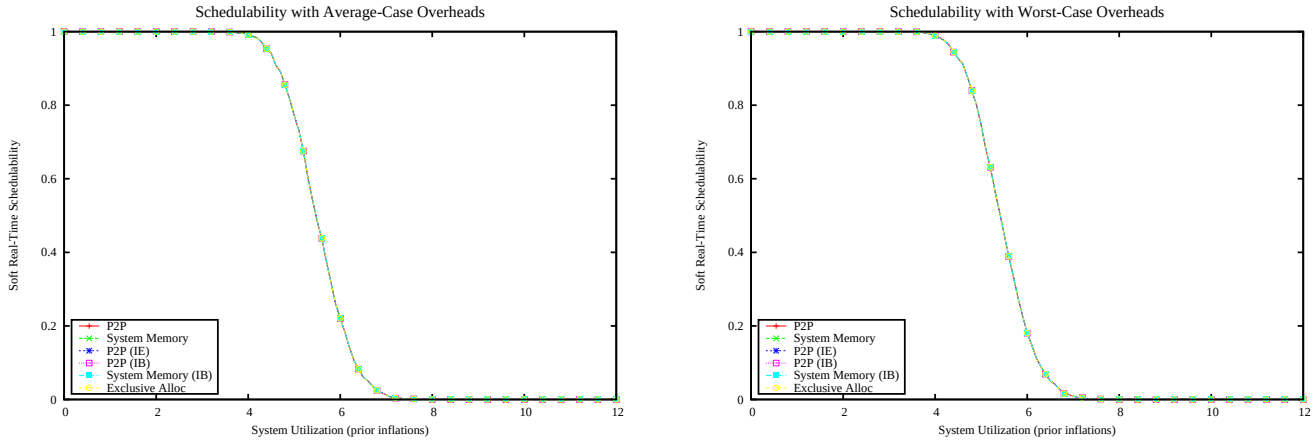

Figure 2625: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

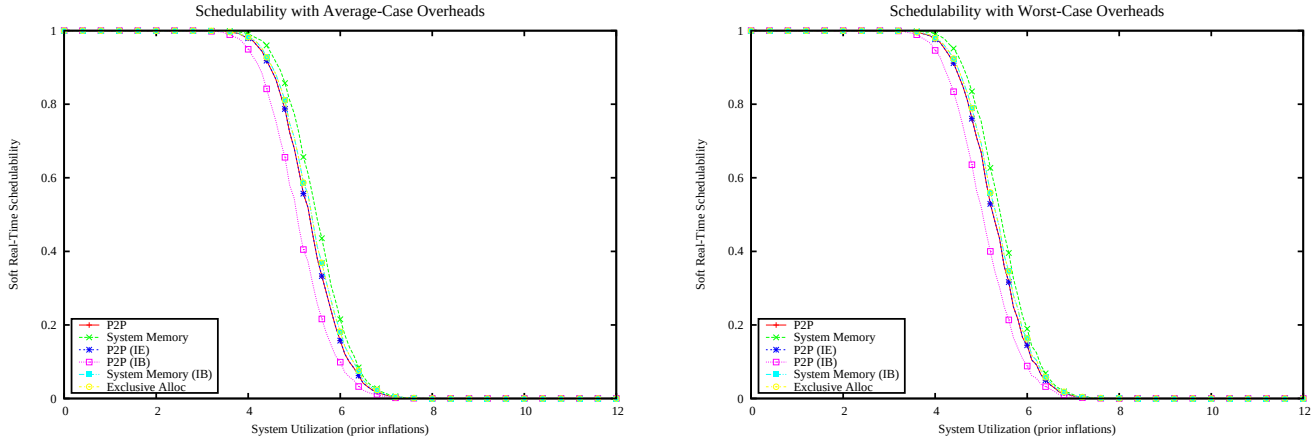

Figure 2626: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

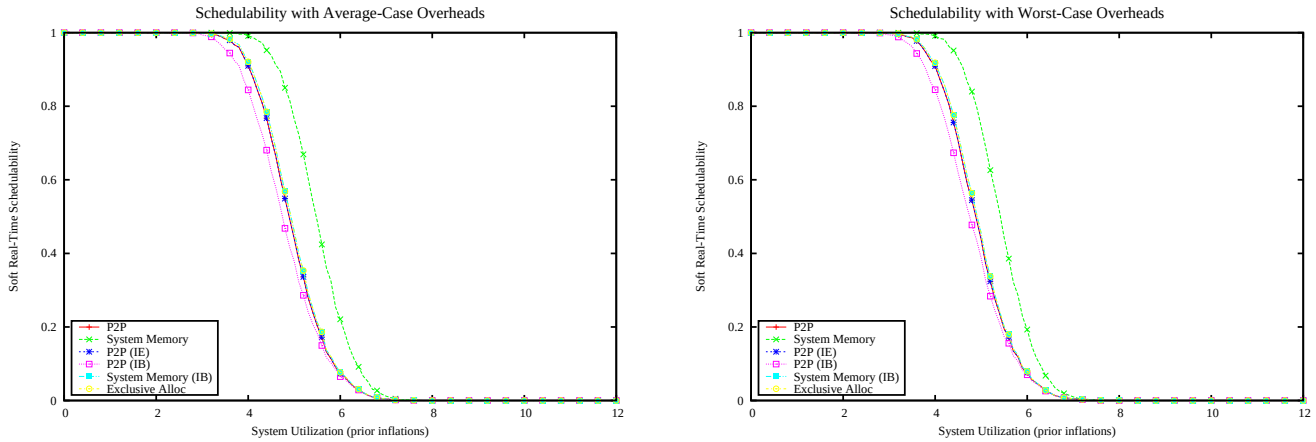

Figure 2627: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

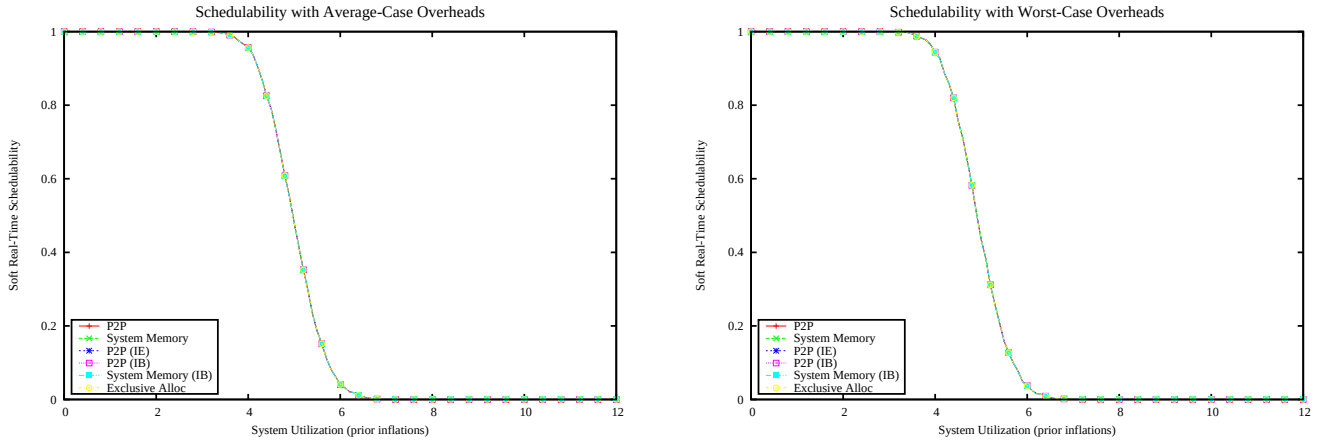

Figure 2628: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

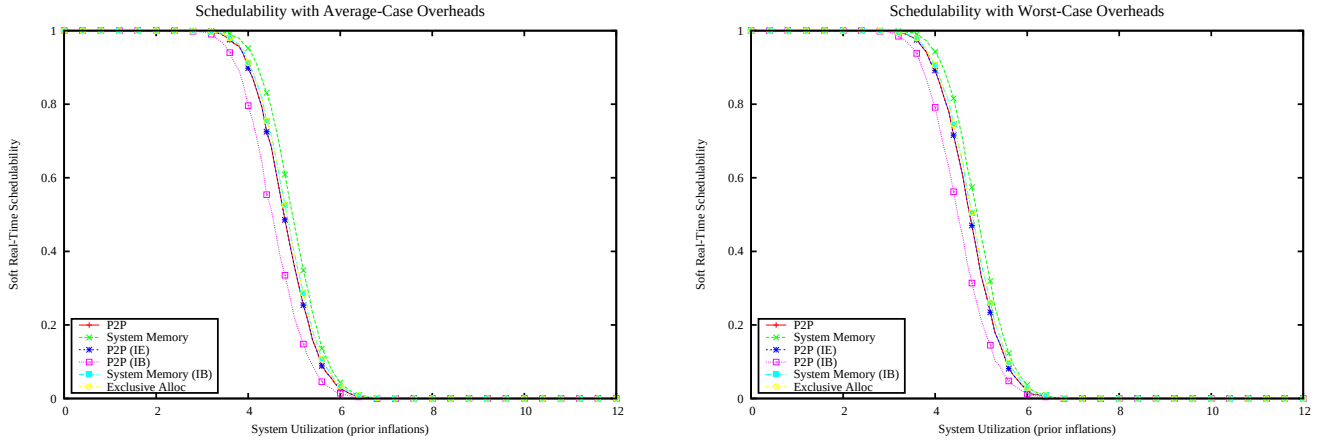

Figure 2629: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

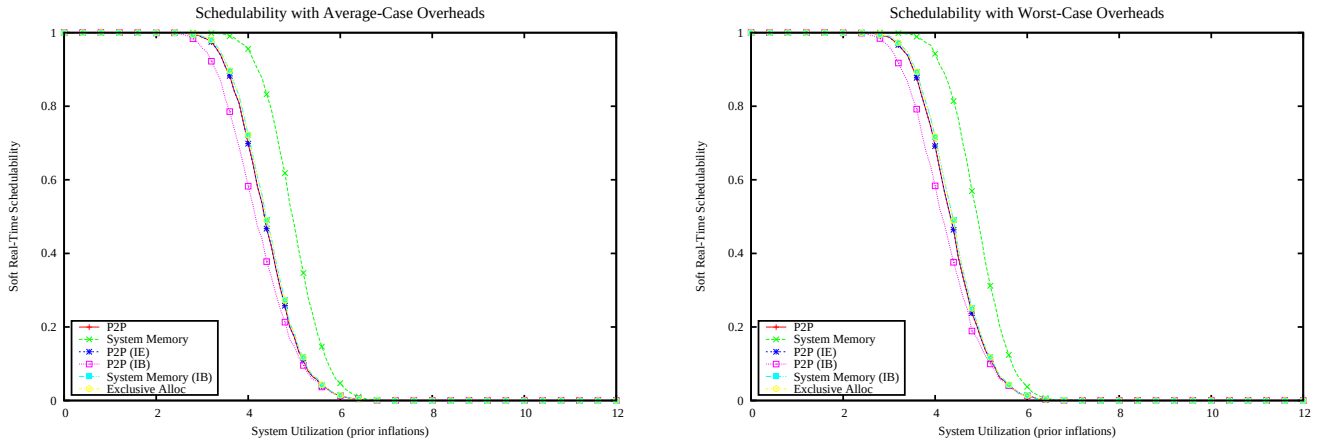

Figure 2630: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

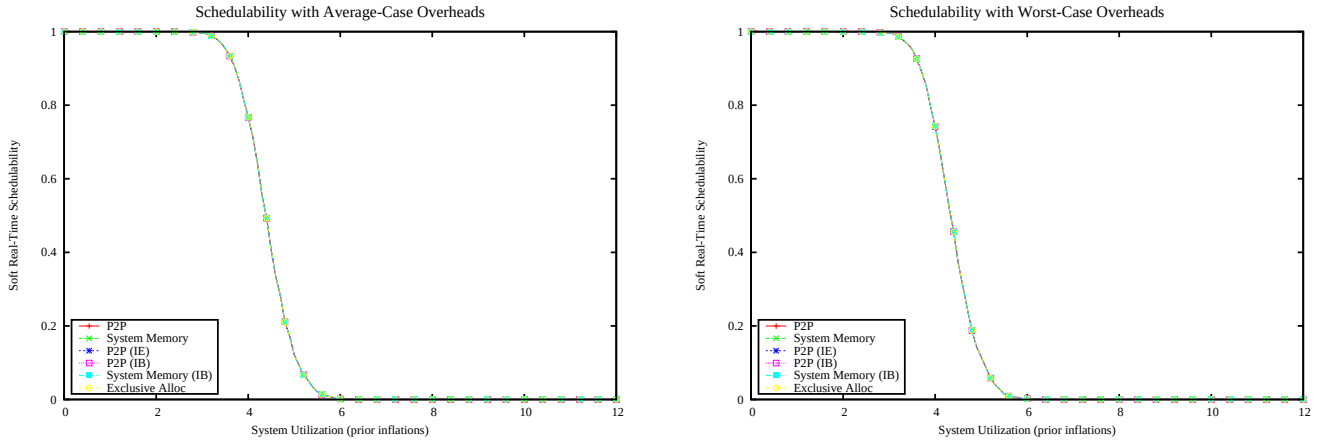

Figure 2631: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

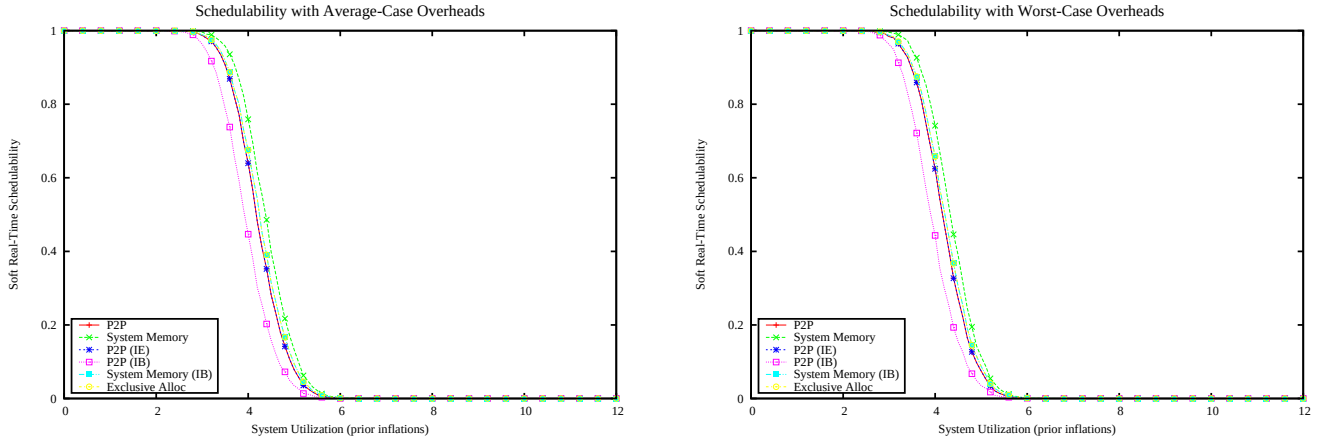

Figure 2632: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

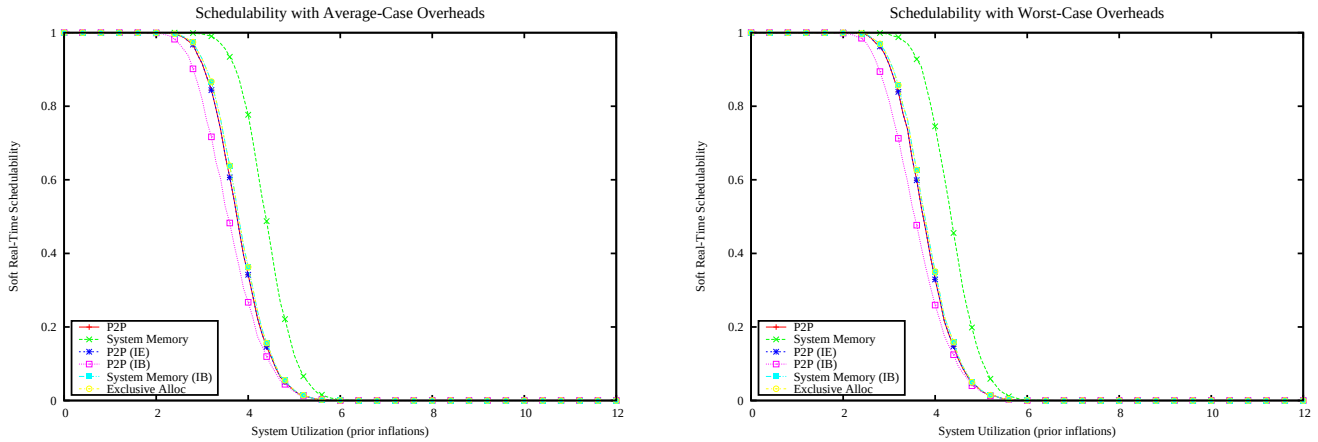

Figure 2633: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

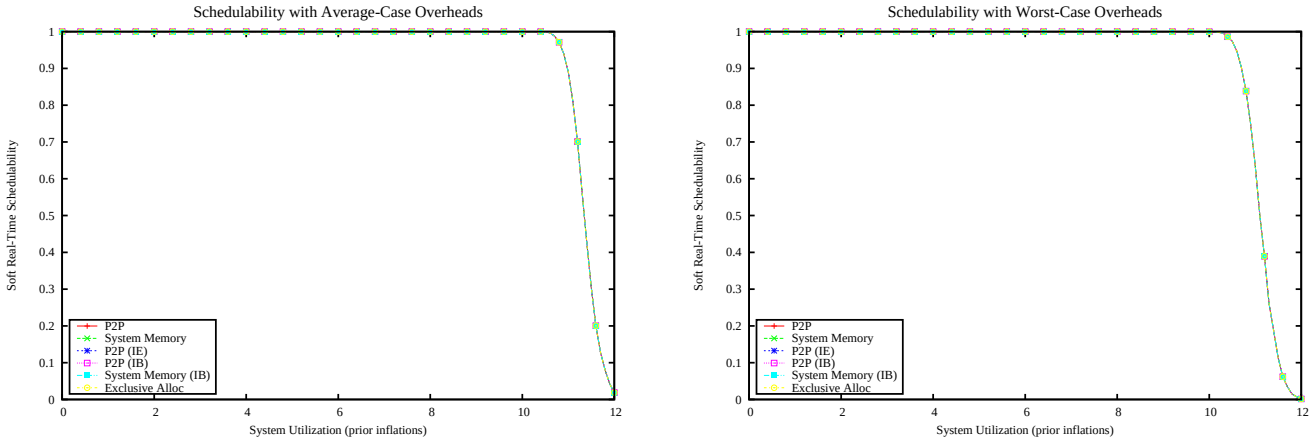

Figure 2634: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

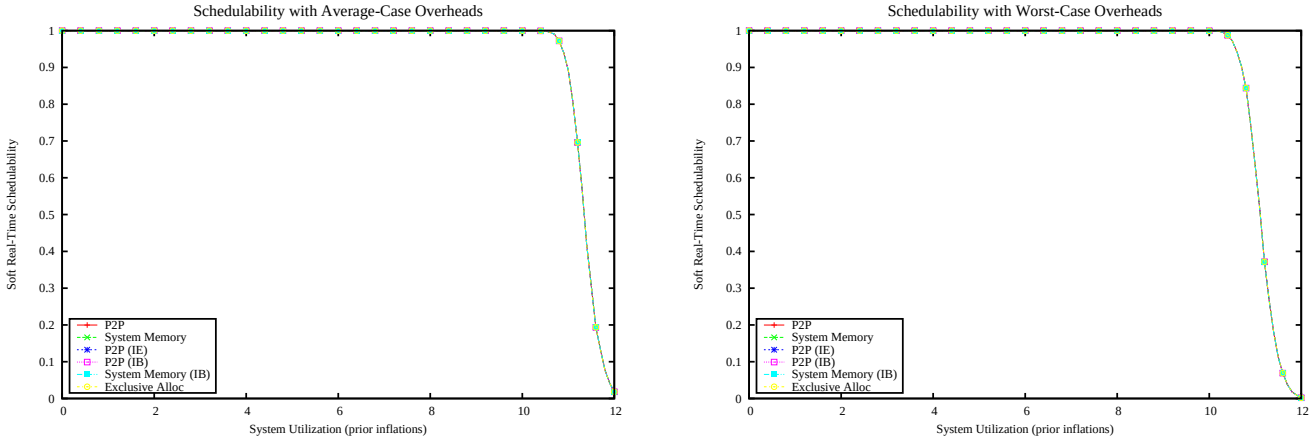

Figure 2635: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

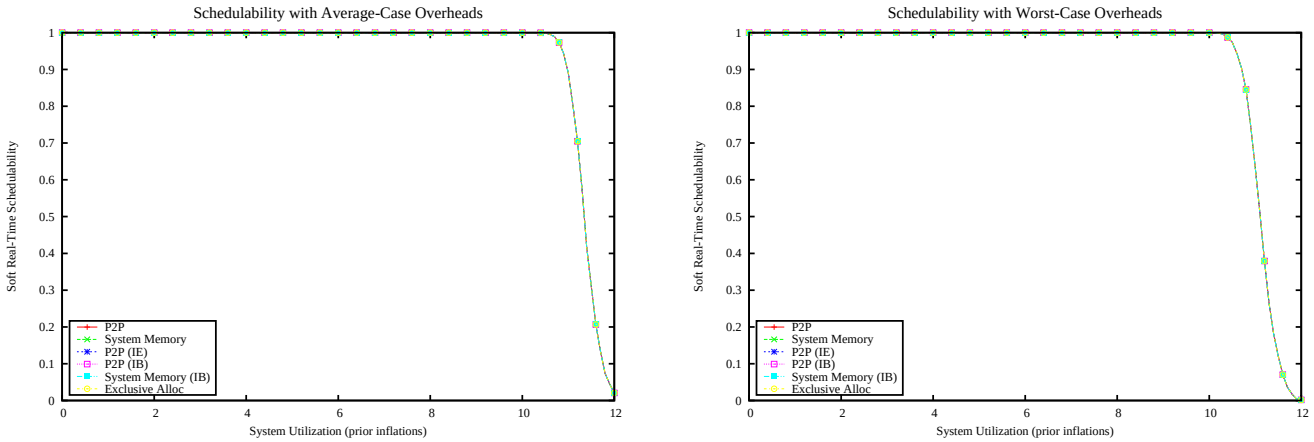

Figure 2636: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

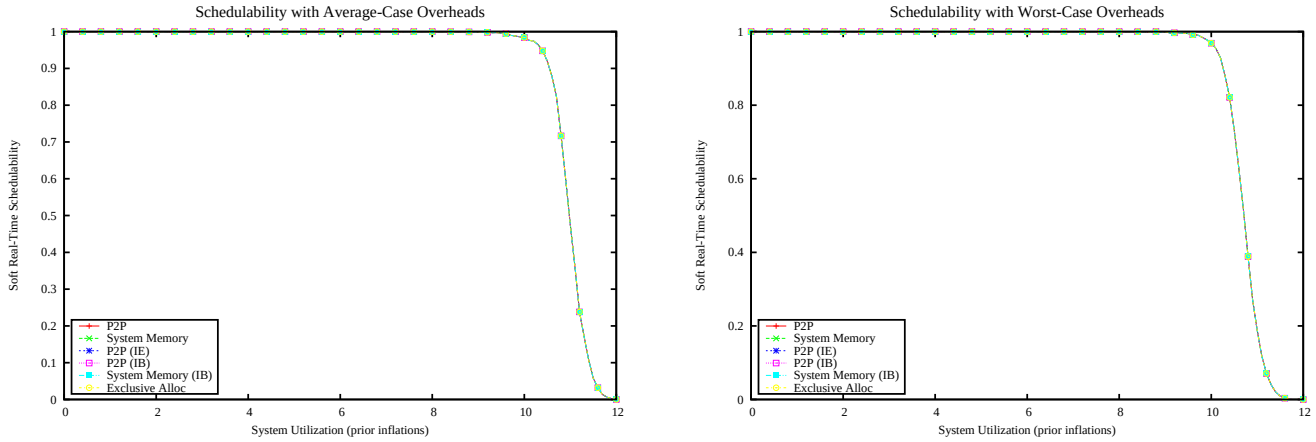

Figure 2637: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

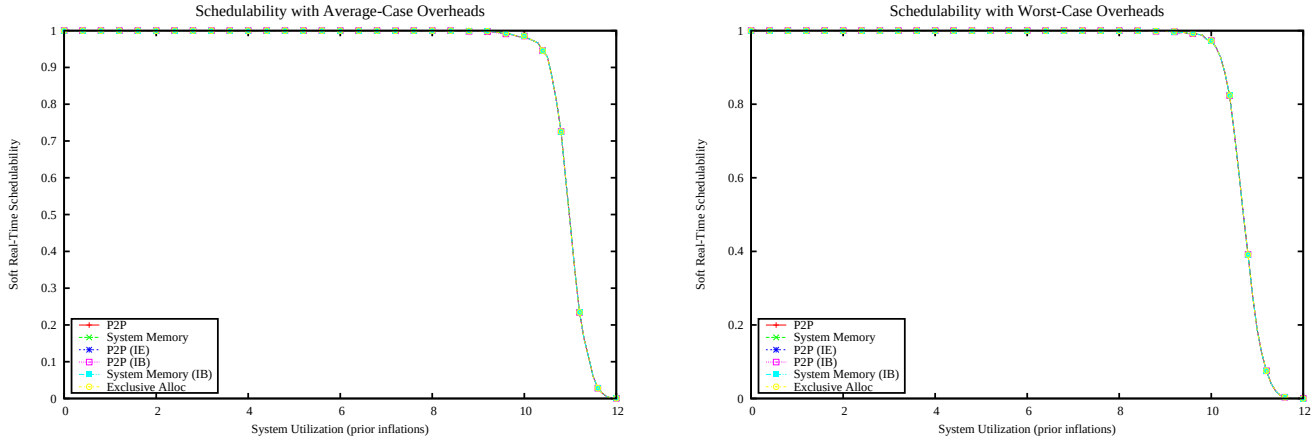

Figure 2638: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

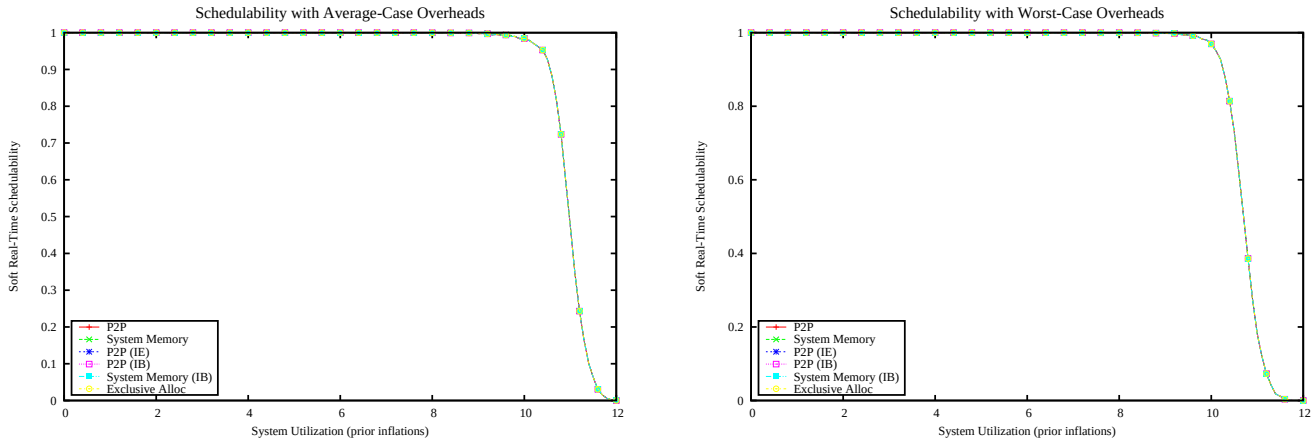

Figure 2639: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

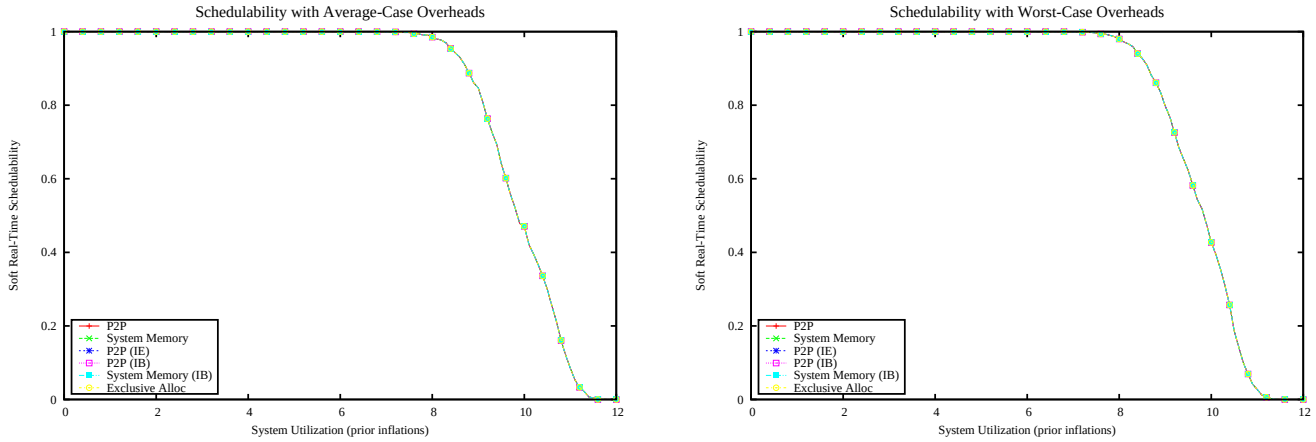

Figure 2640: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

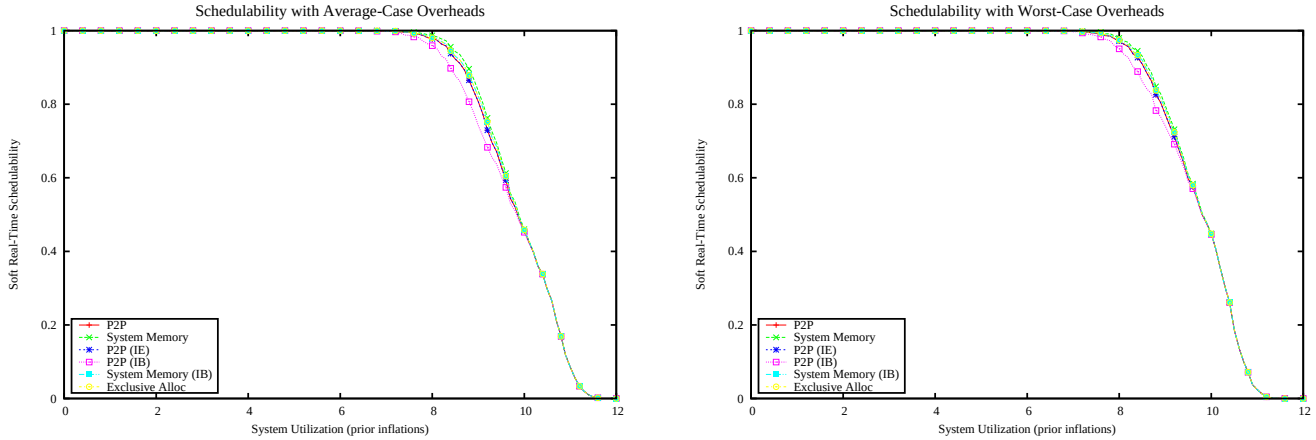

Figure 2641: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

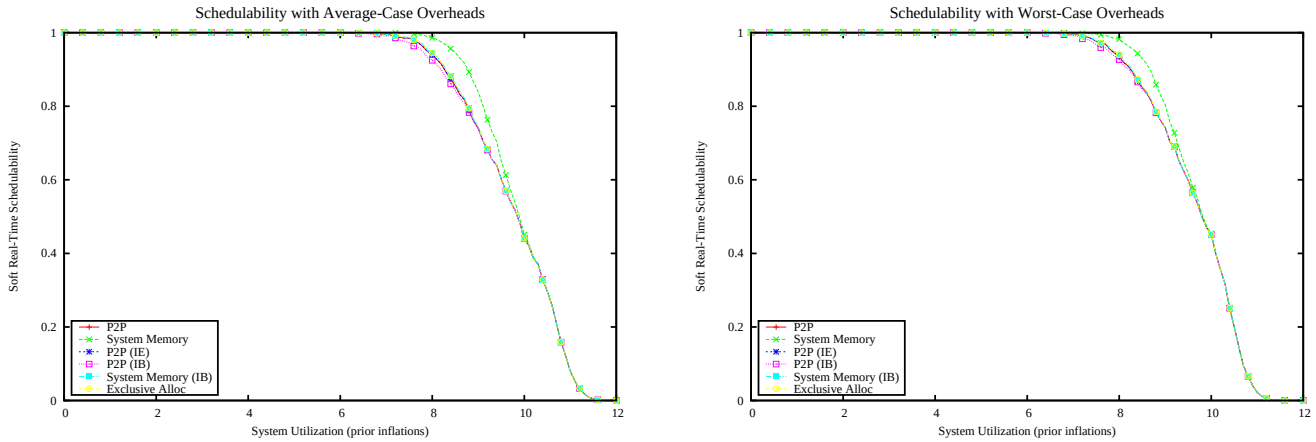

Figure 2642: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

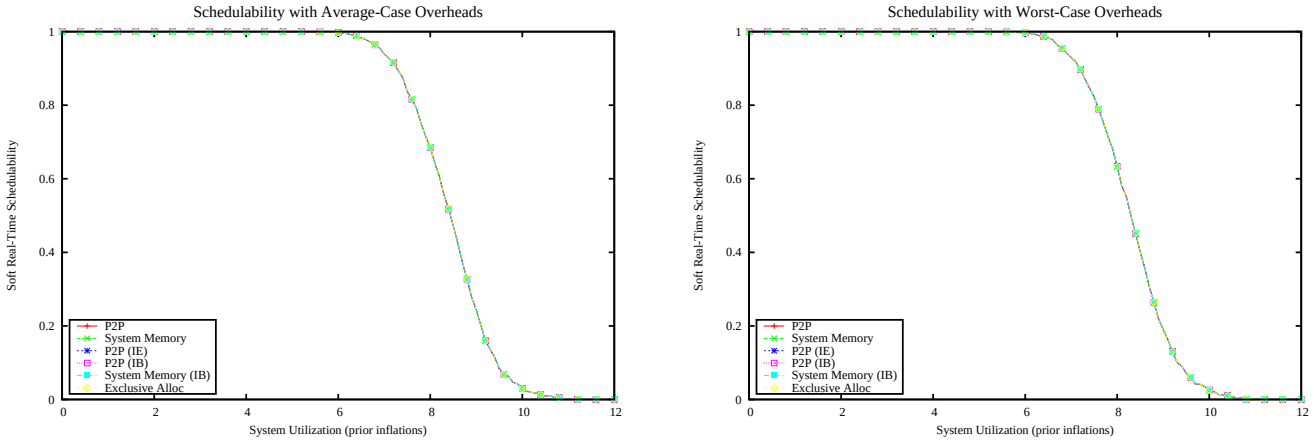

Figure 2643: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

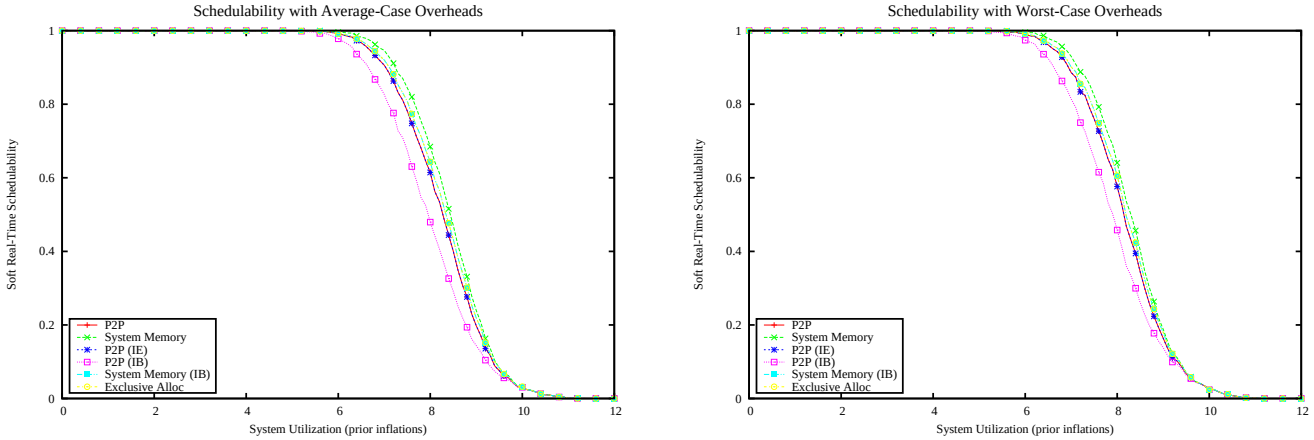

Figure 2644: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

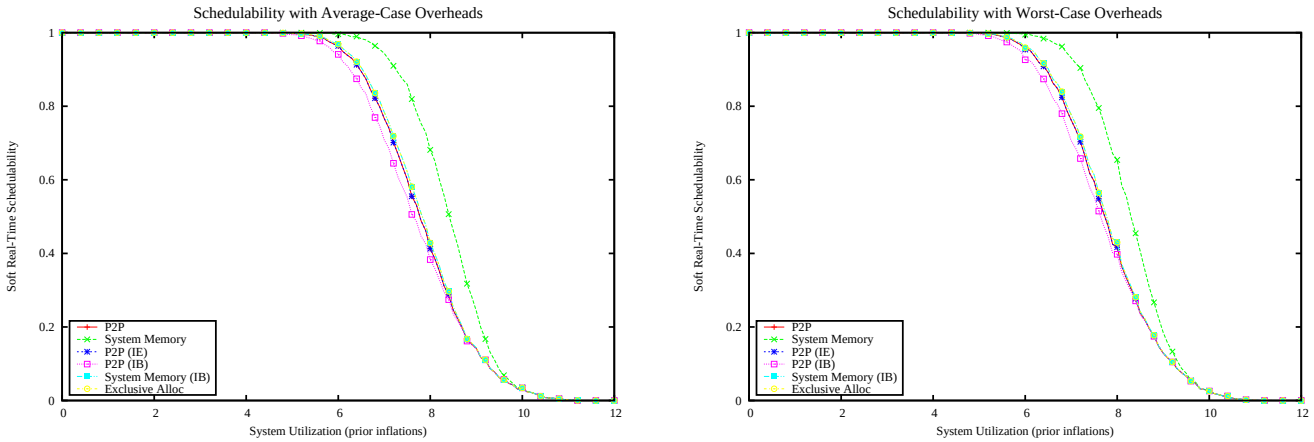

Figure 2645: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

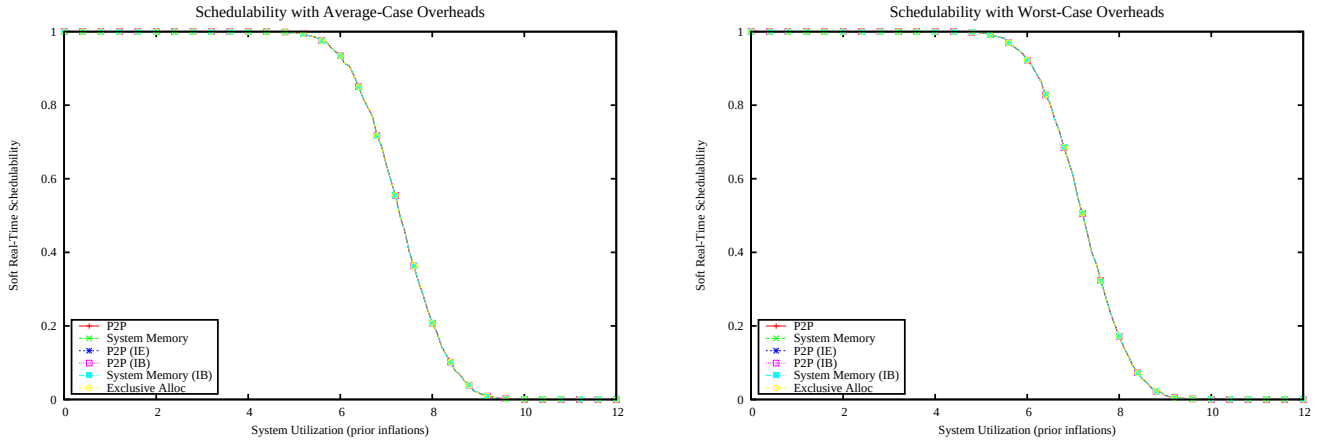

Figure 2646: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

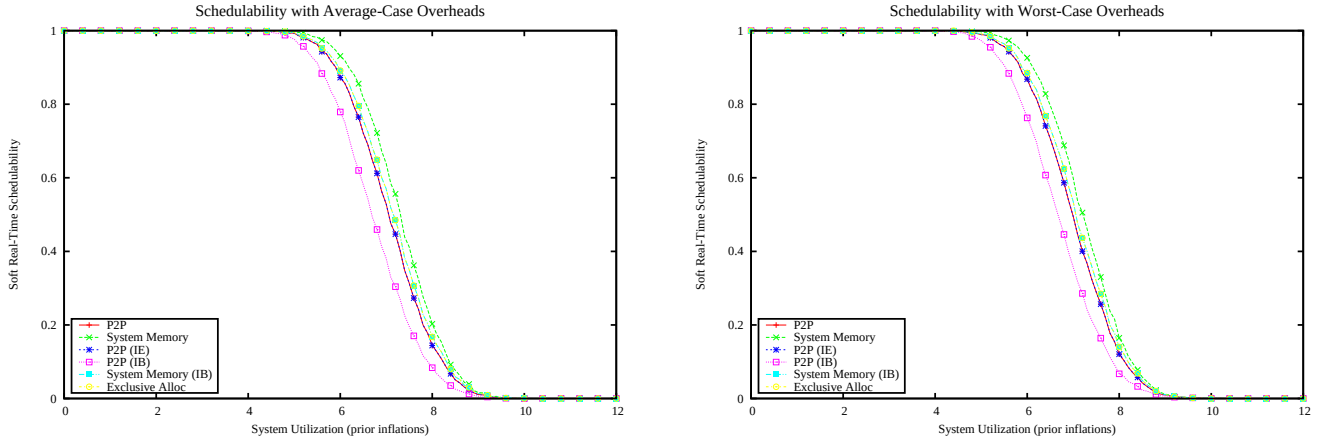

Figure 2647: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

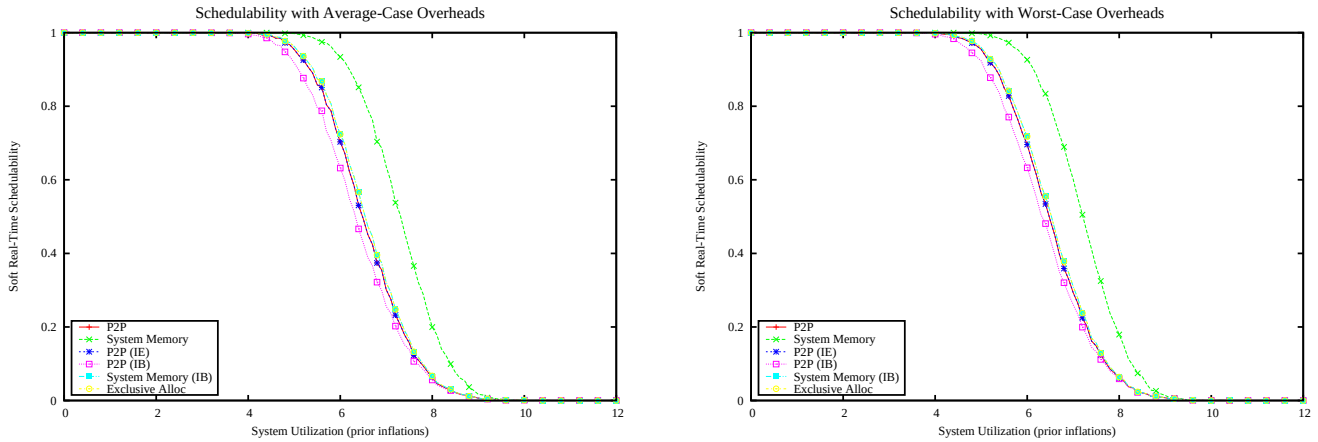

Figure 2648: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

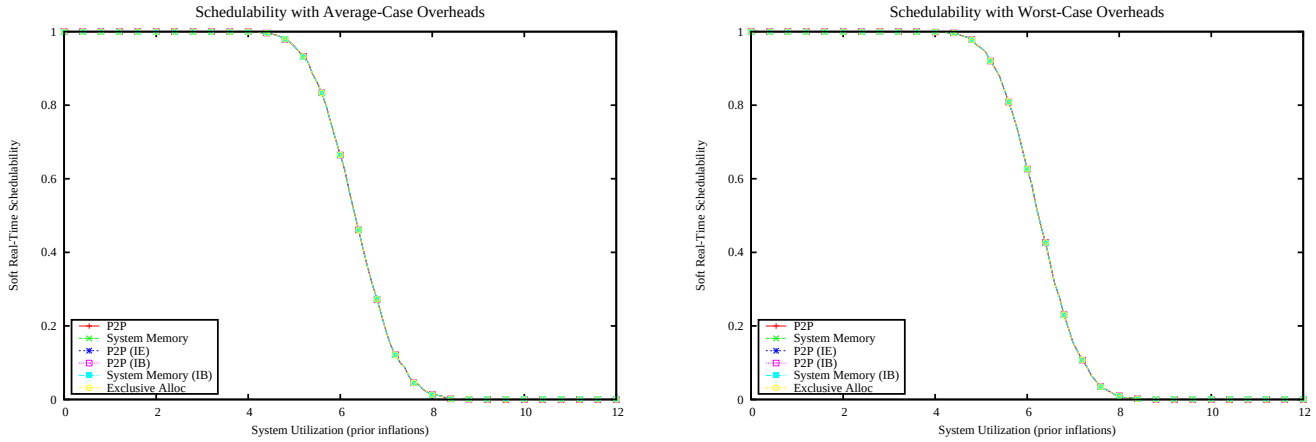

Figure 2649: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

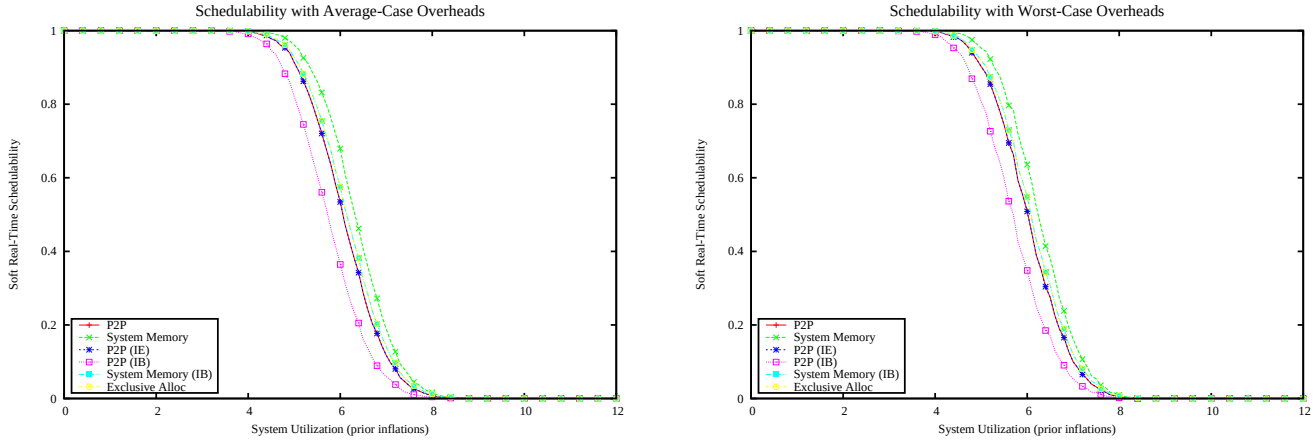

Figure 2650: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

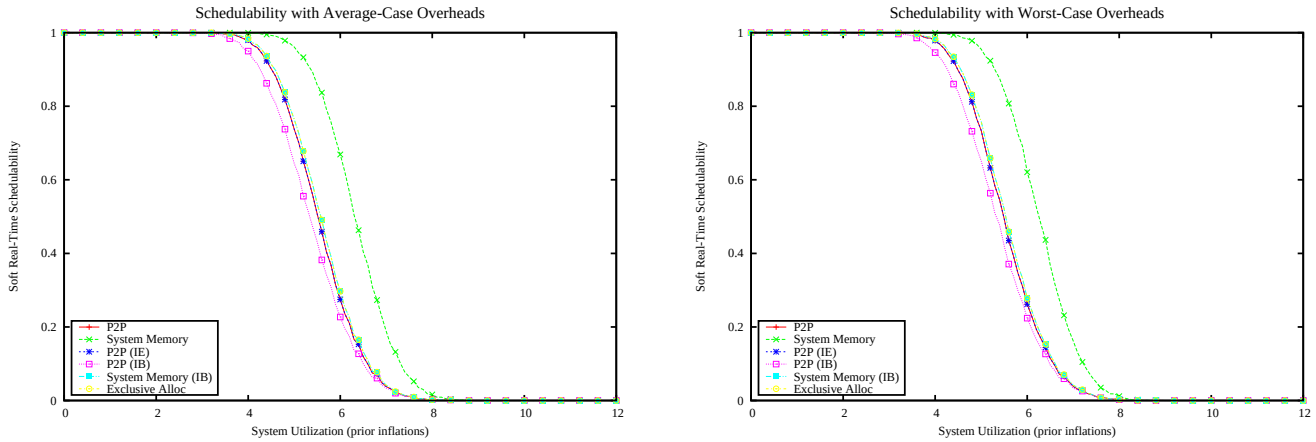

Figure 2651: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

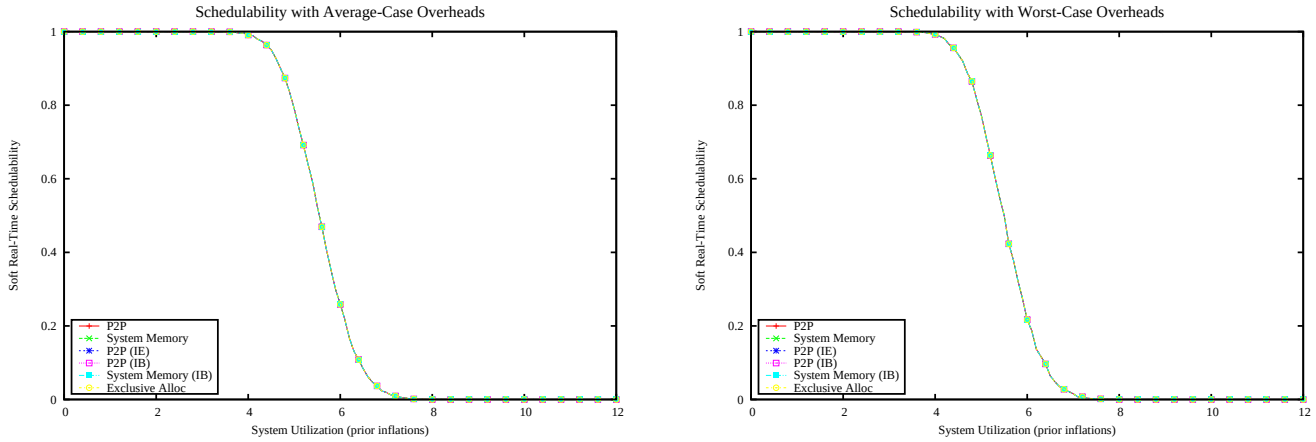

Figure 2652: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

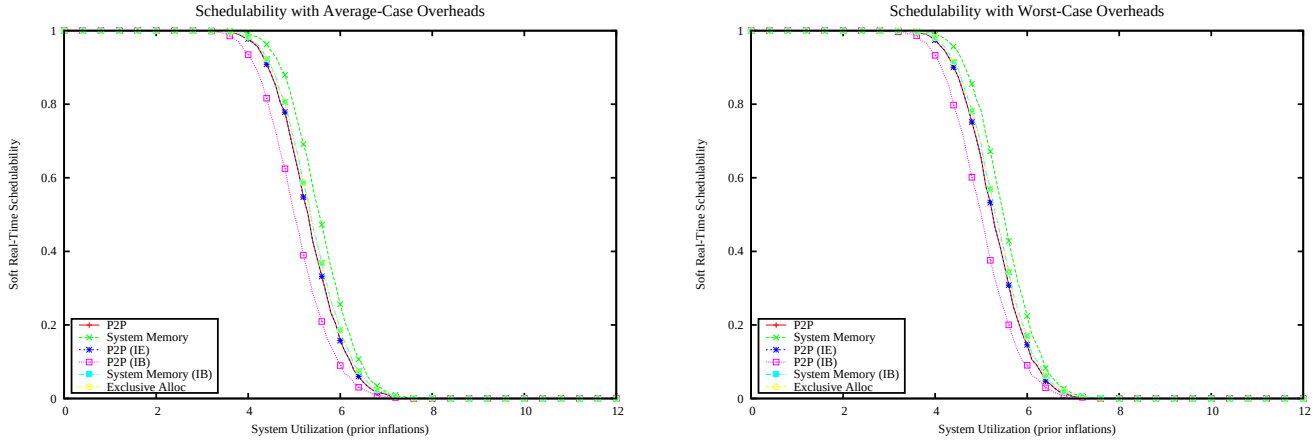

Figure 2653: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

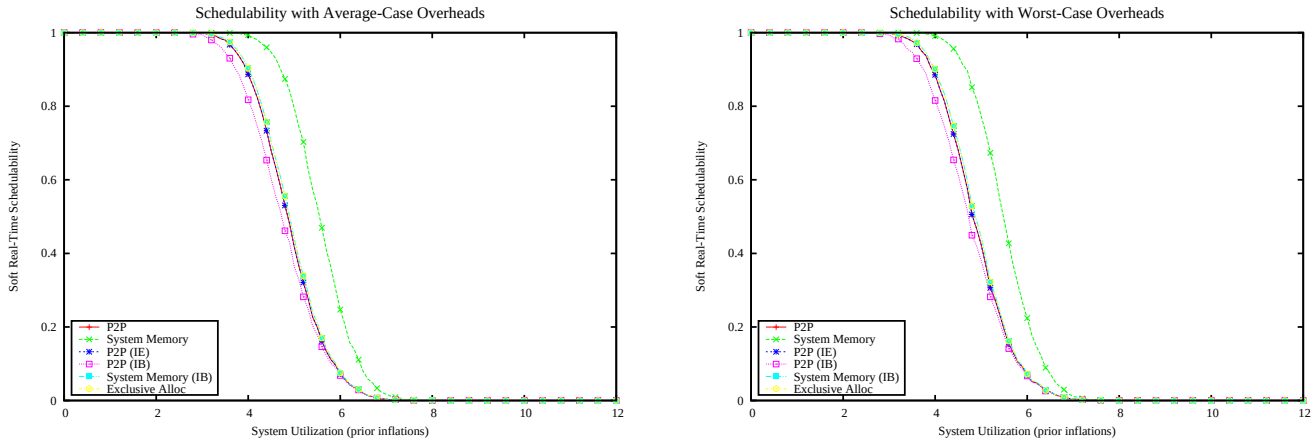

Figure 2654: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

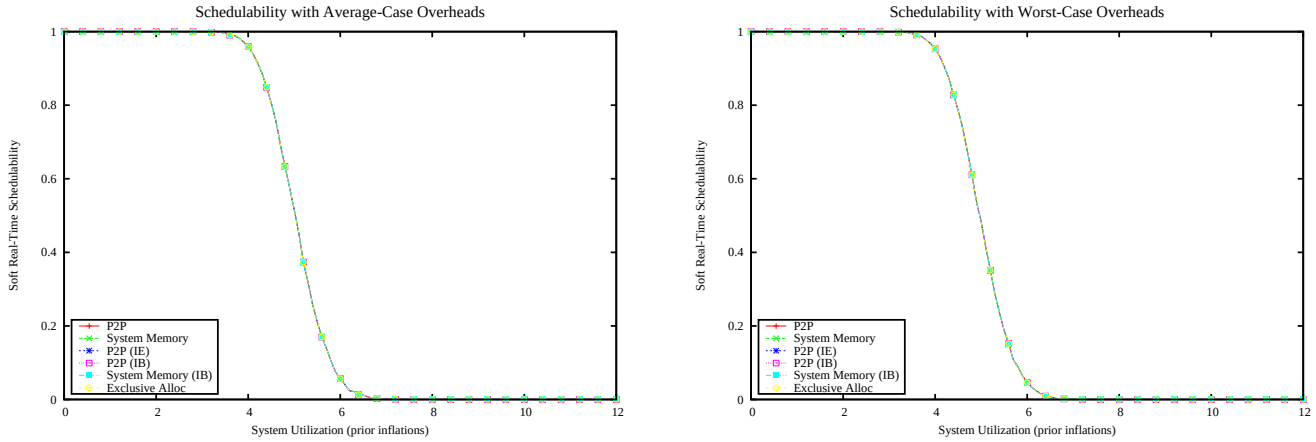

Figure 2655: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

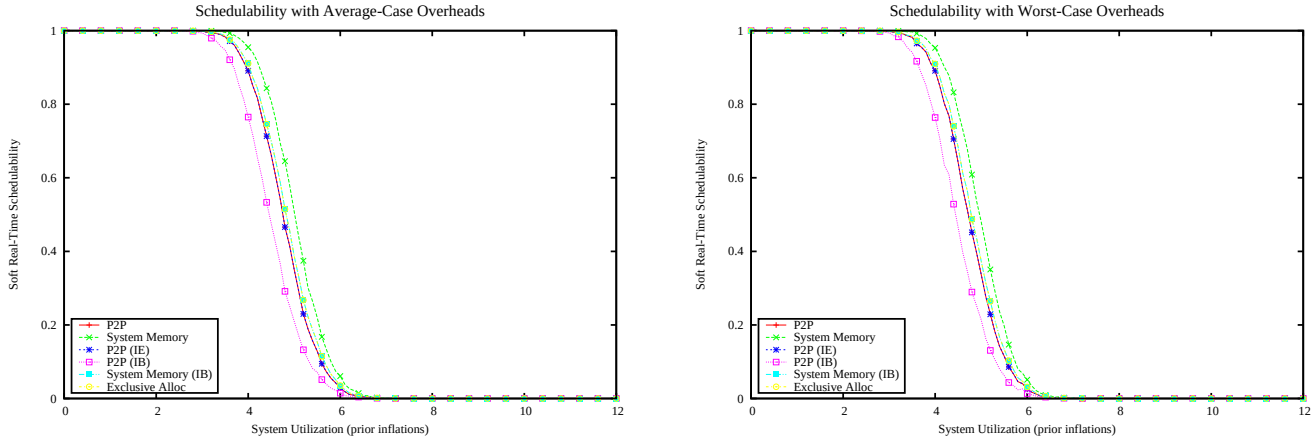

Figure 2656: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

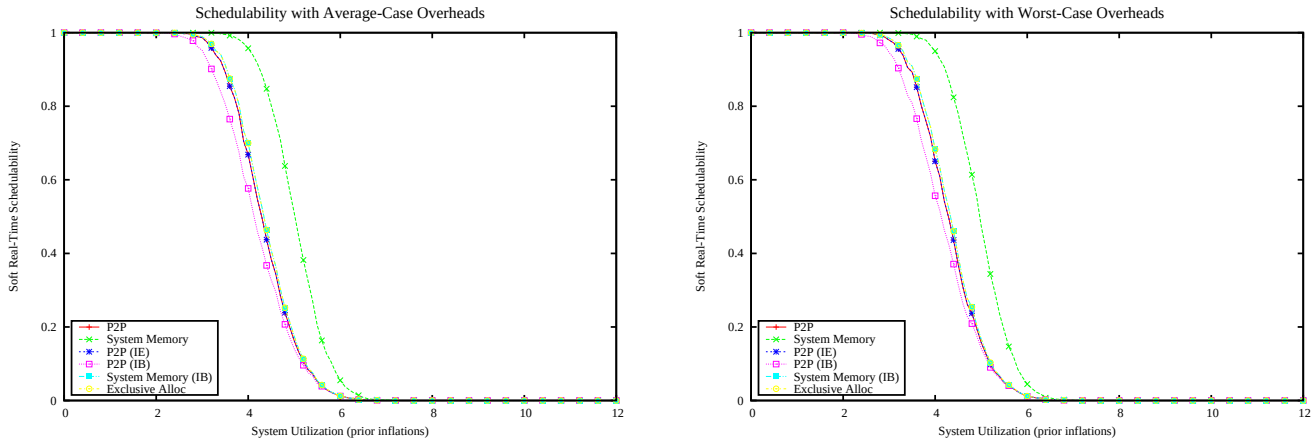

Figure 2657: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

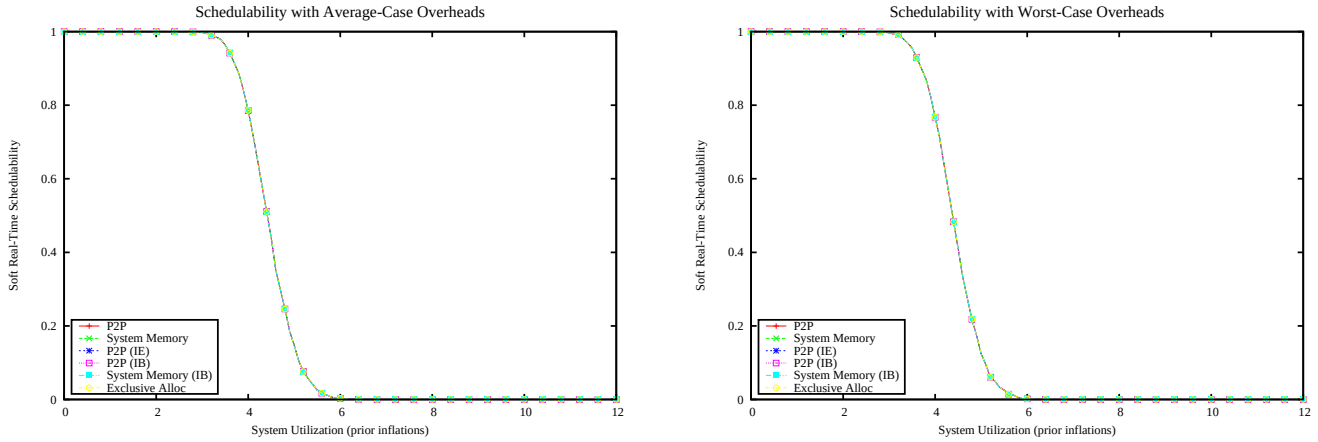

Figure 2658: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

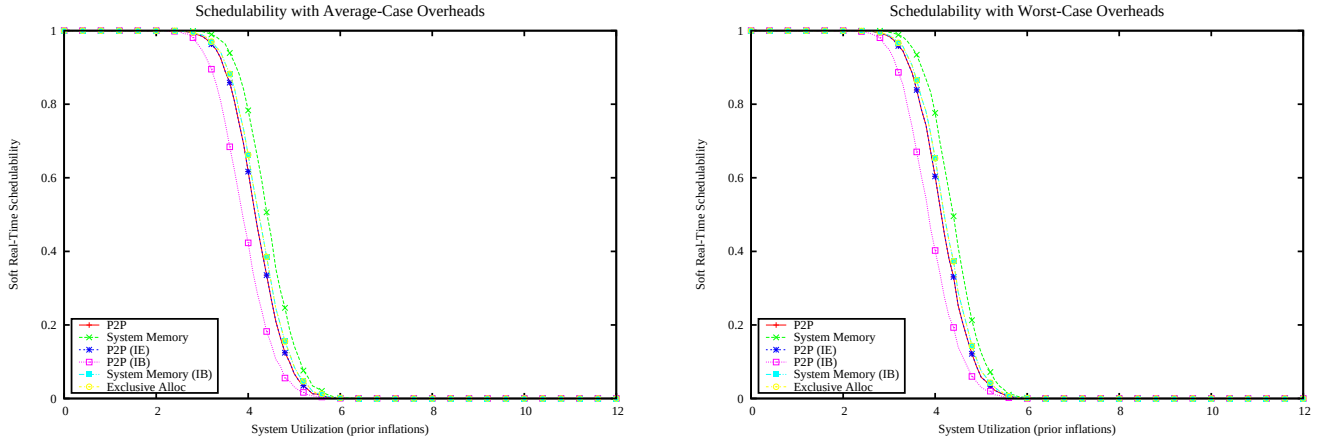

Figure 2659: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

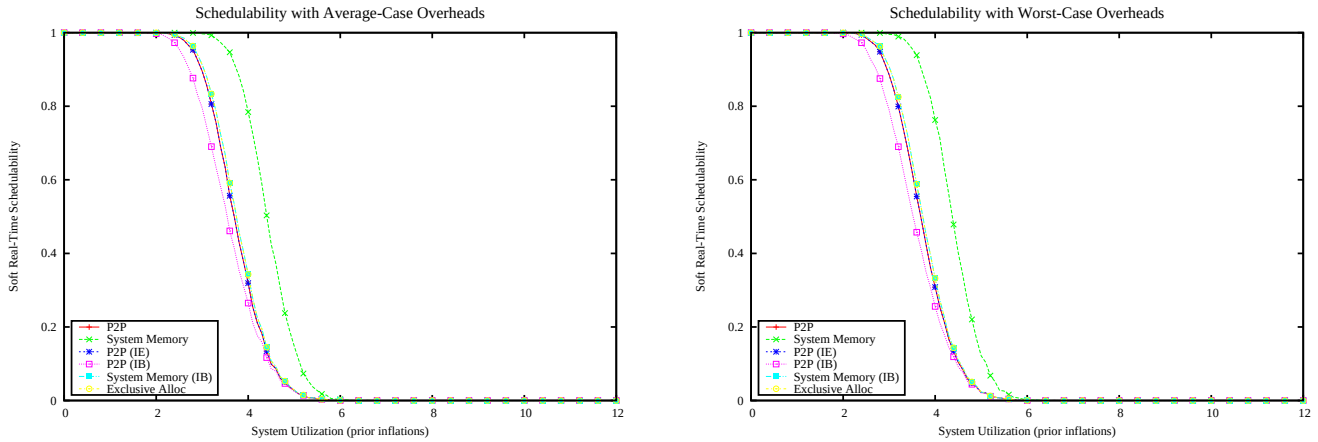

Figure 2660: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

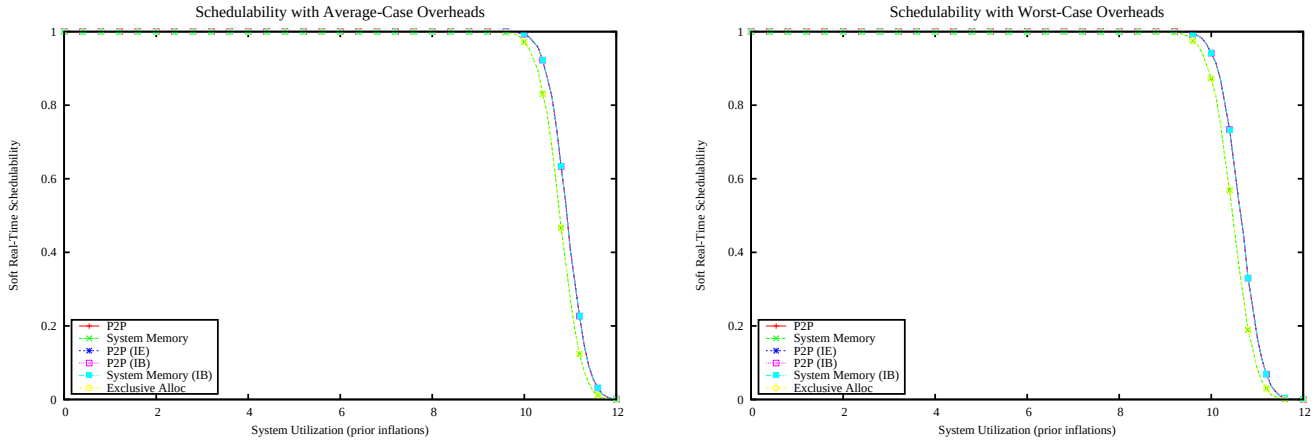

Figure 2661: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

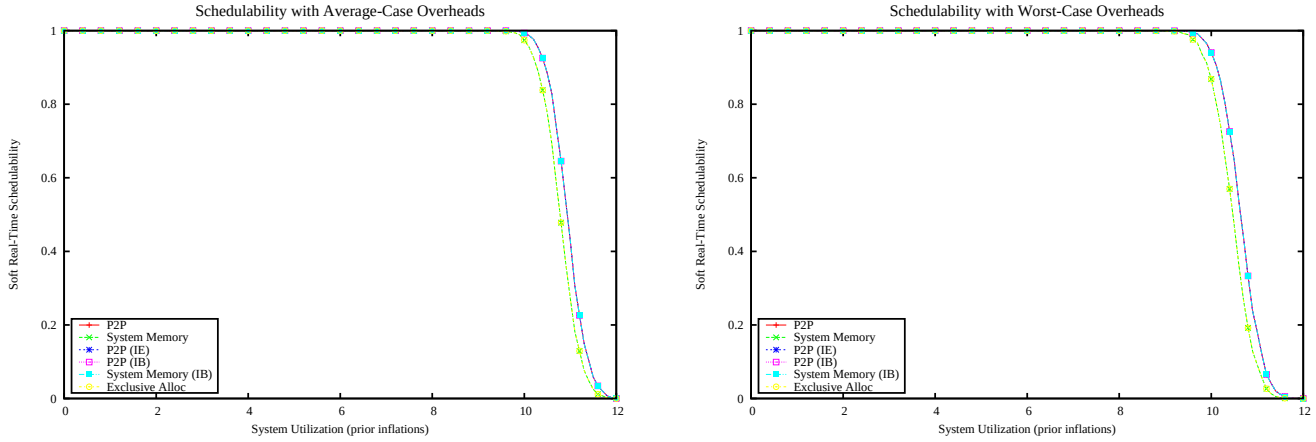

Figure 2662: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

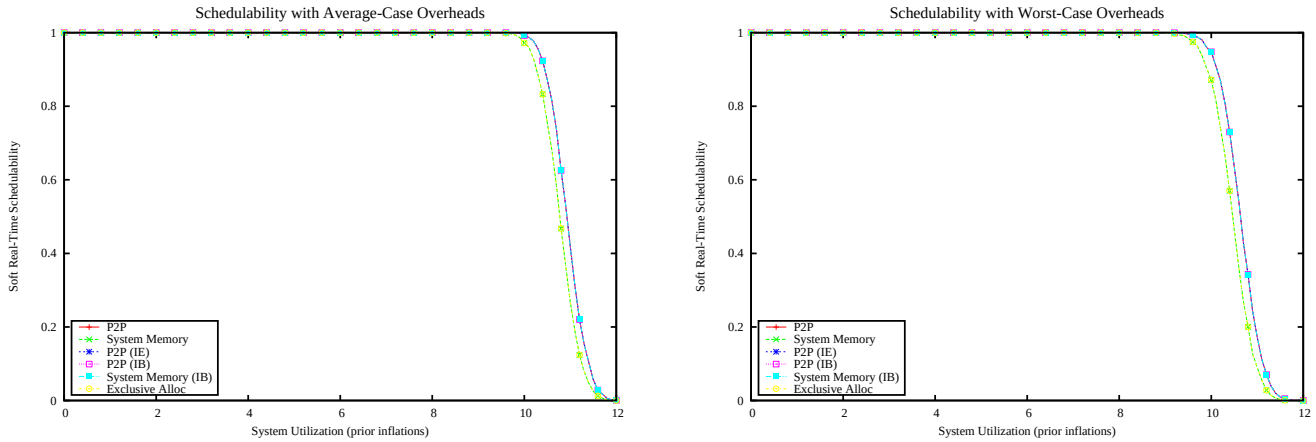

Figure 2663: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

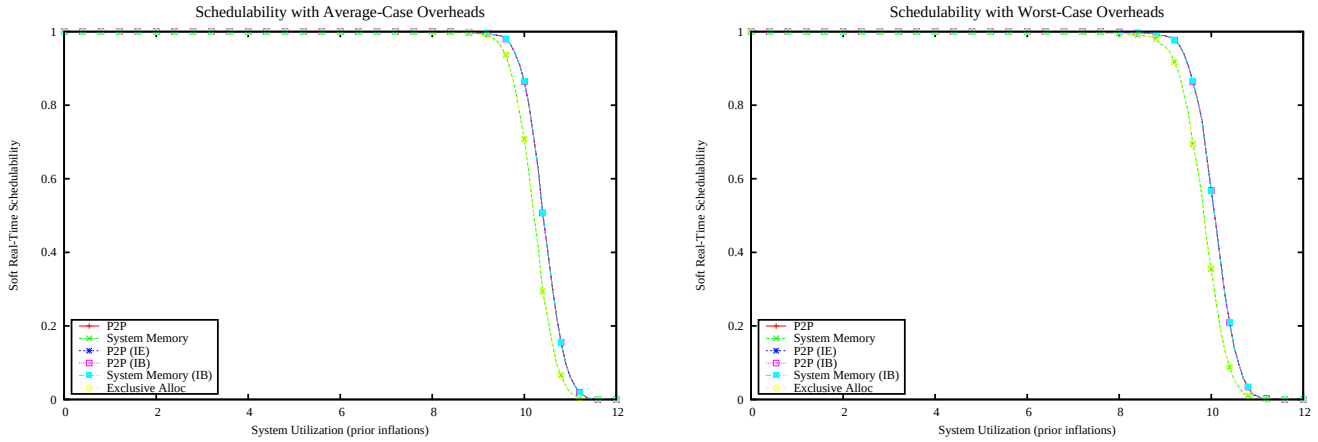

Figure 2664: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

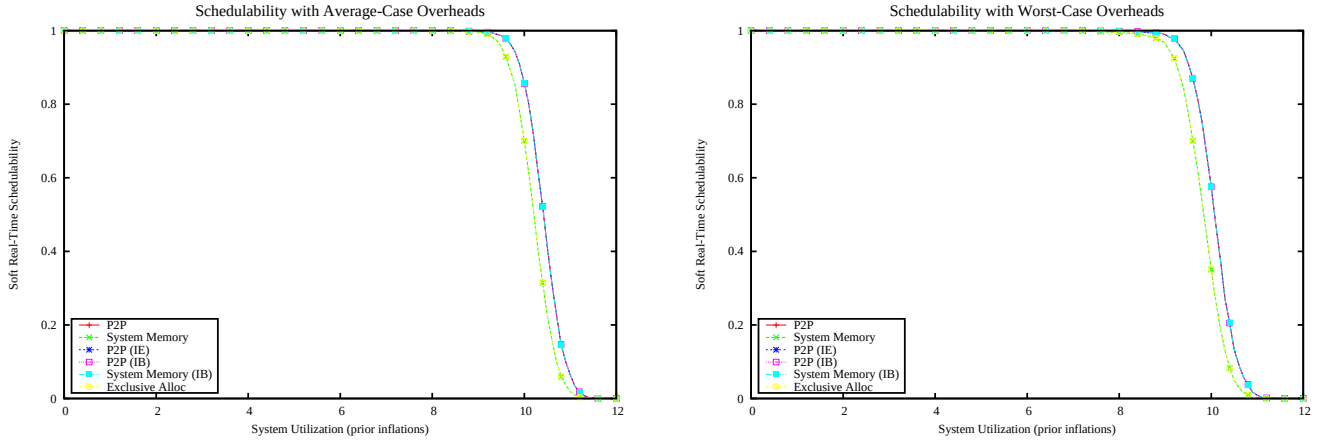

Figure 2665: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

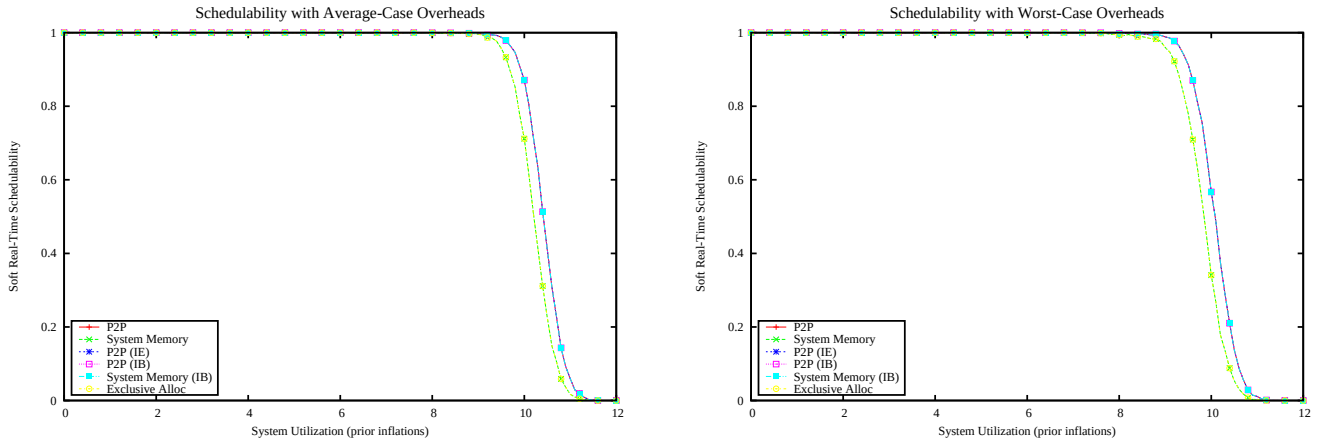

Figure 2666: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

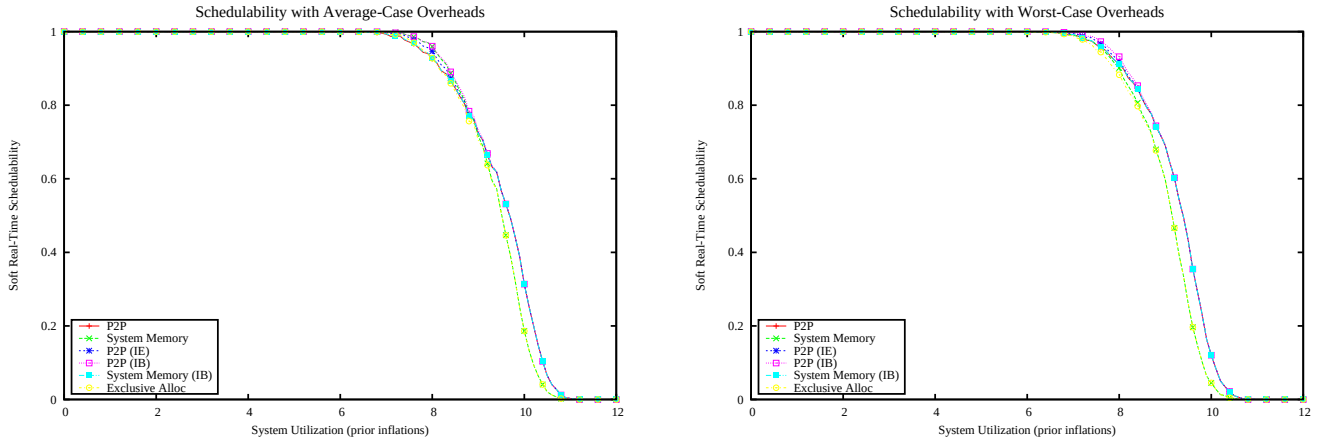

Figure 2667: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

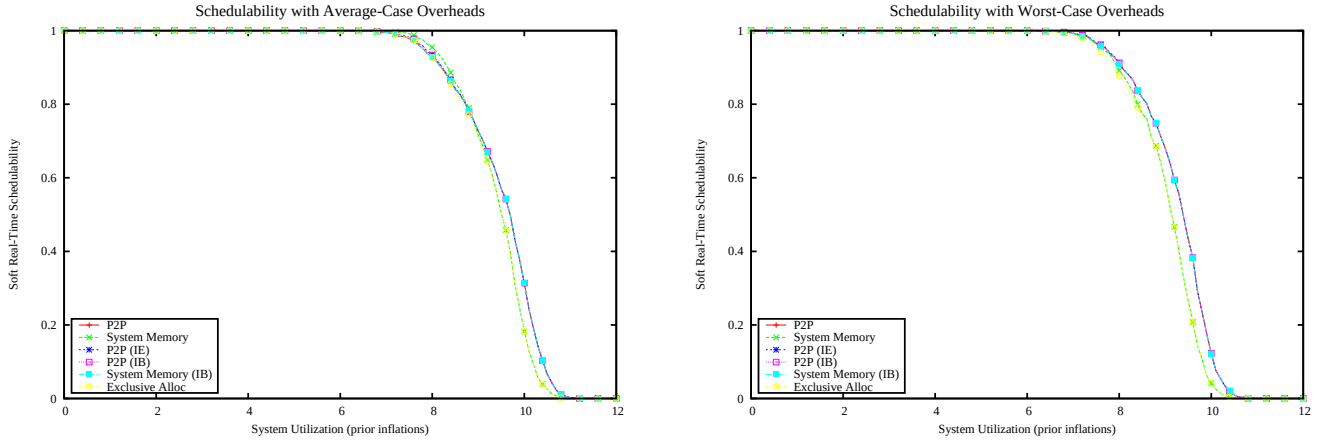

Figure 2668: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

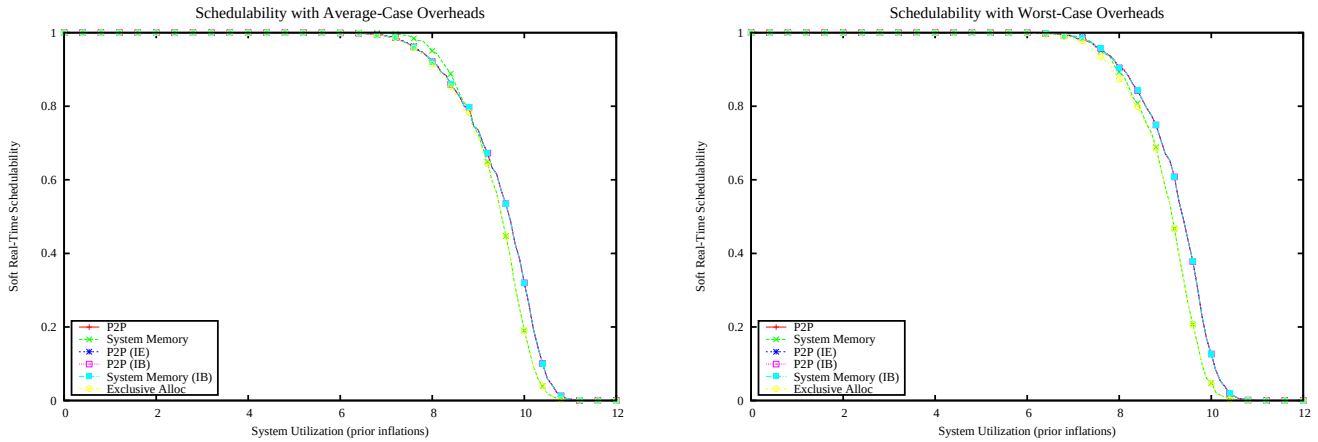

Figure 2669: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

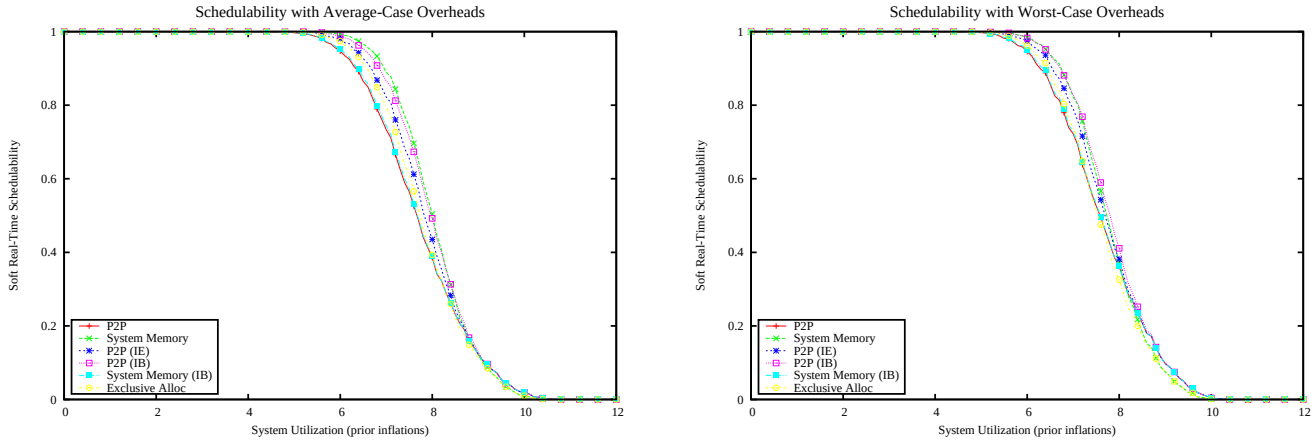

Figure 2670: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

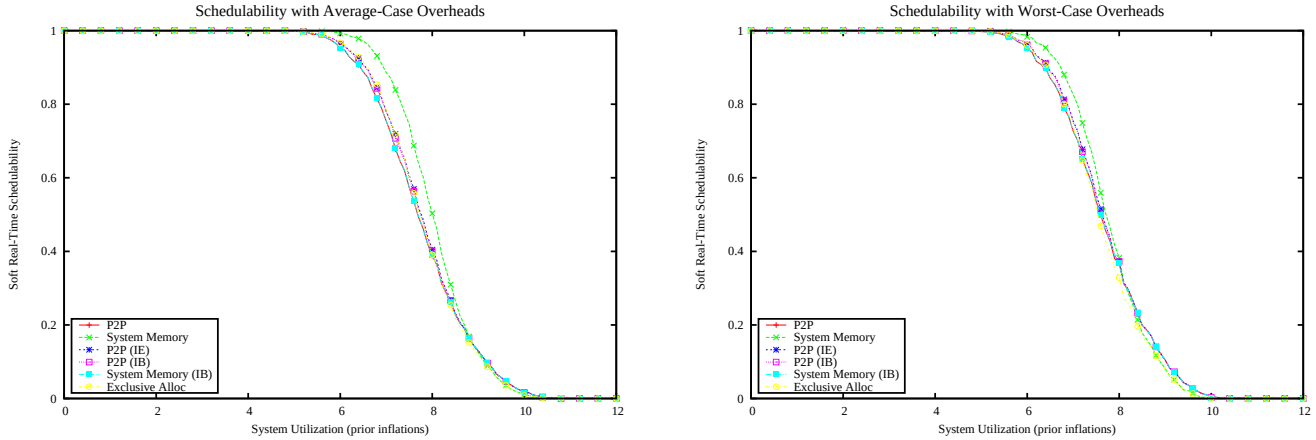

Figure 2671: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

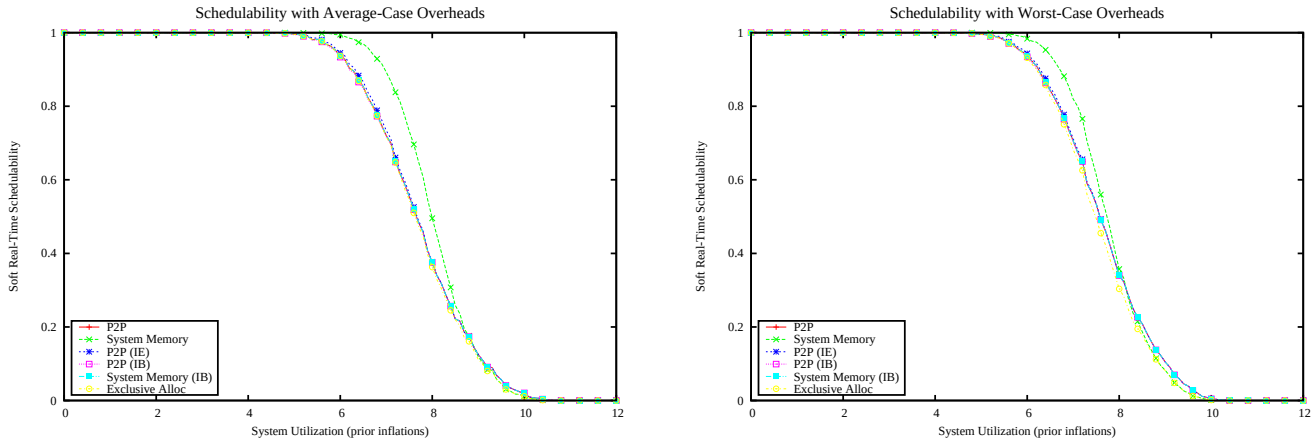

Figure 2672: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

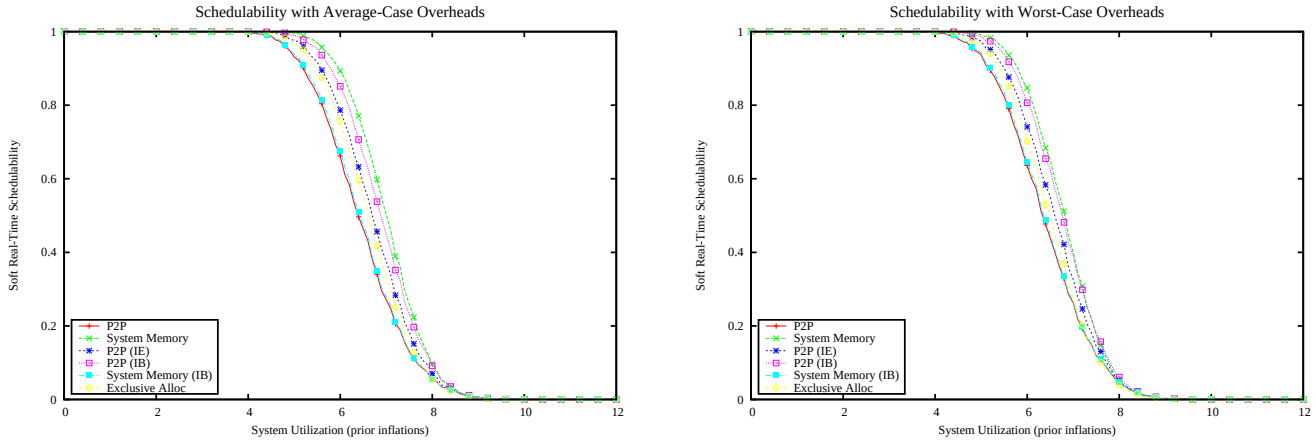

Figure 2673: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

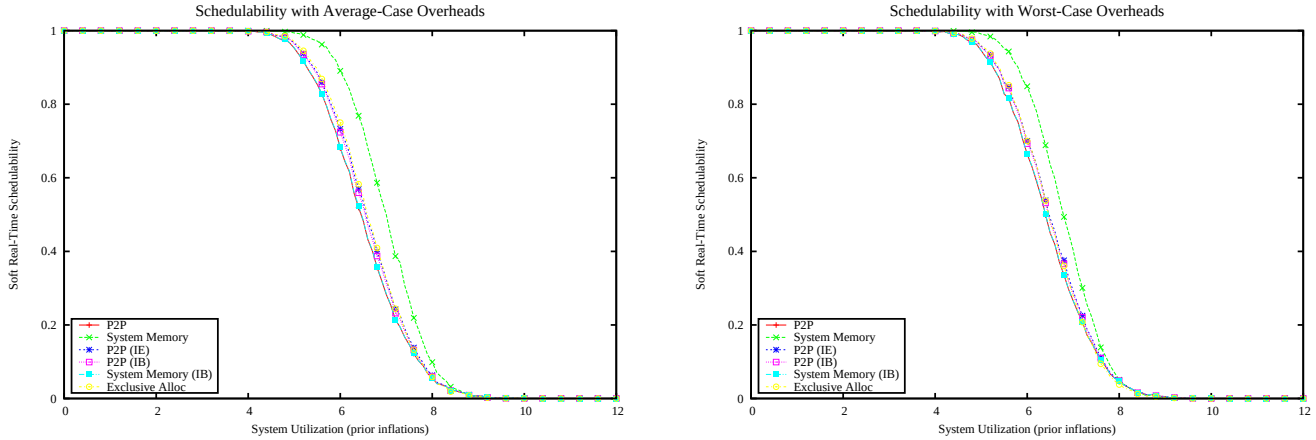

Figure 2674: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

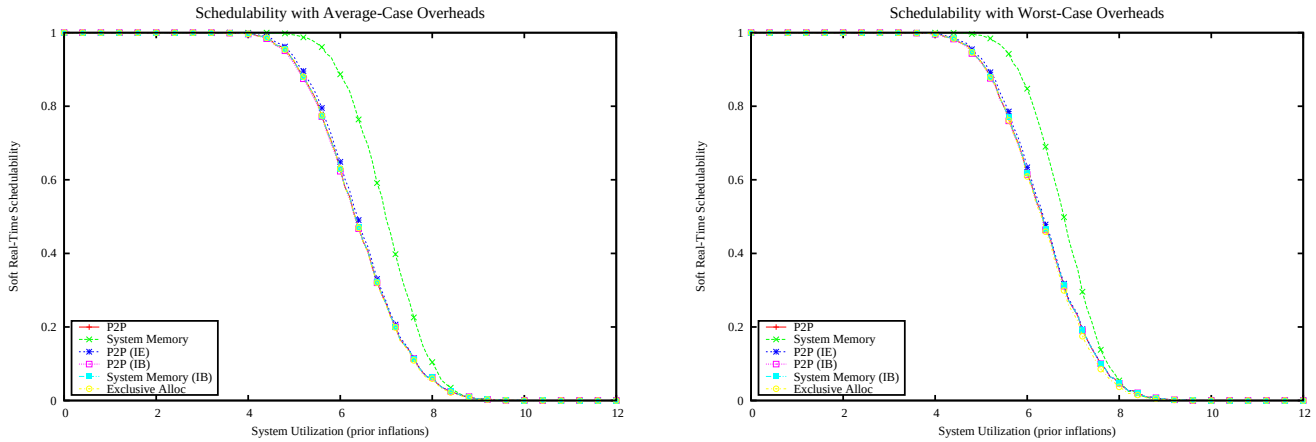

Figure 2675: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

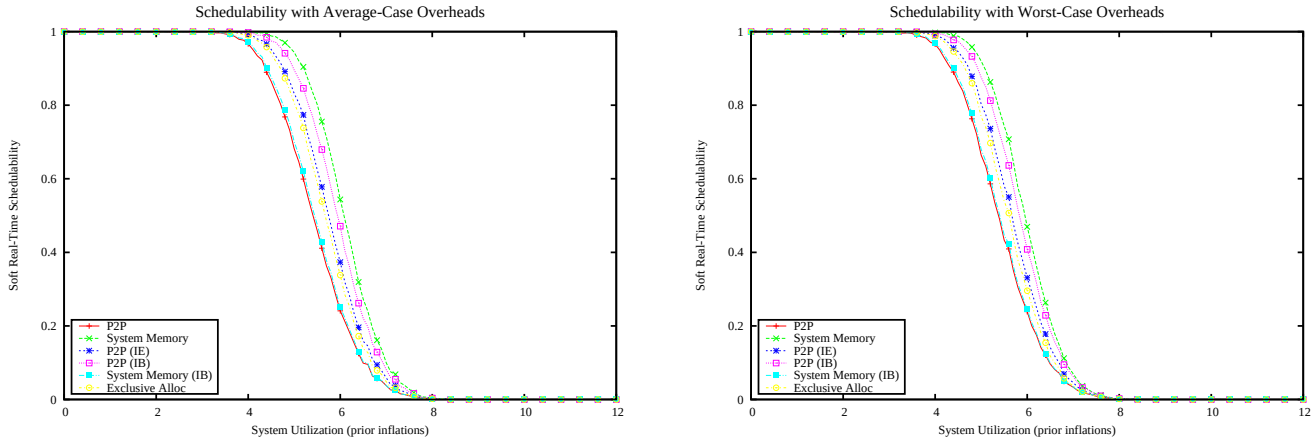

Figure 2676: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

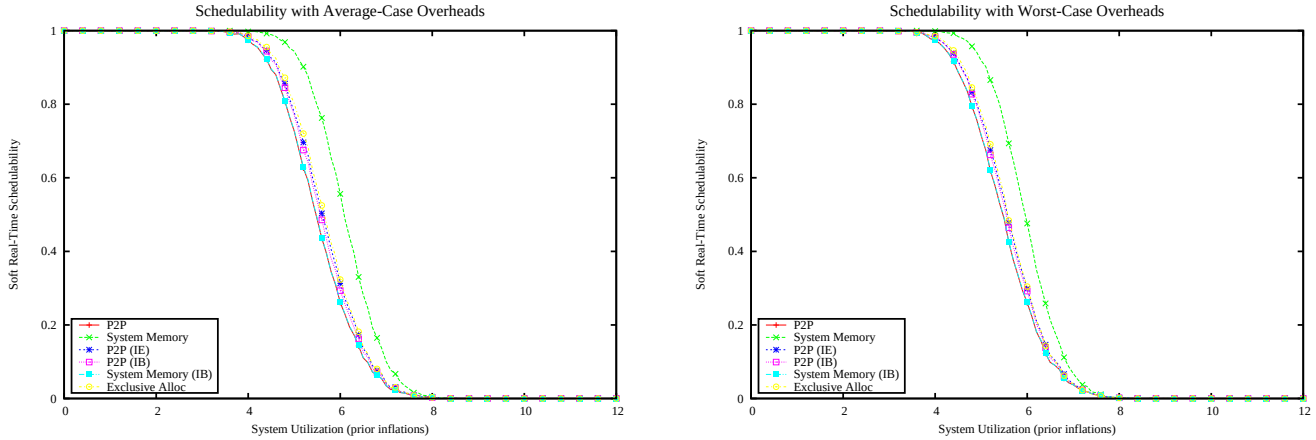

Figure 2677: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

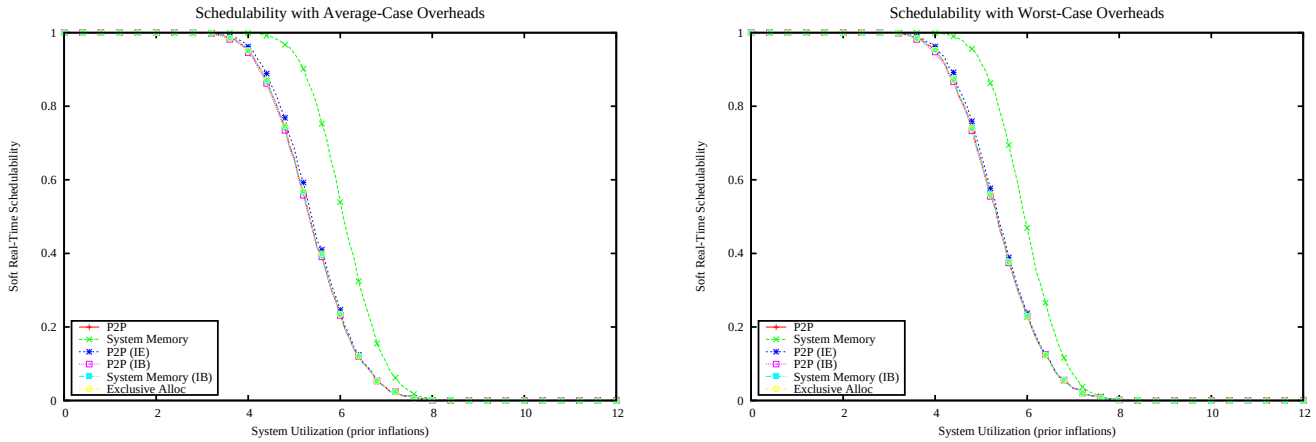

Figure 2678: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

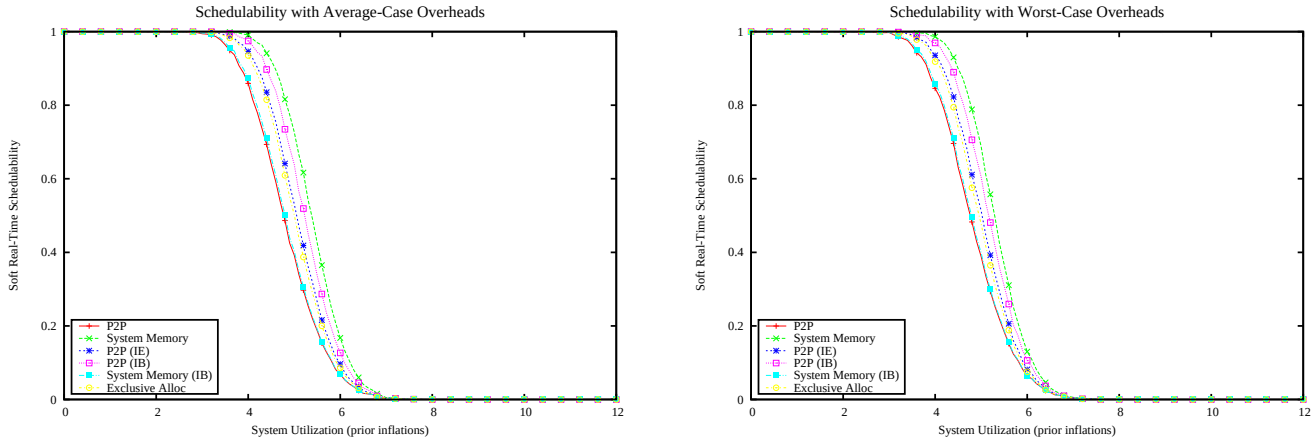

Figure 2679: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

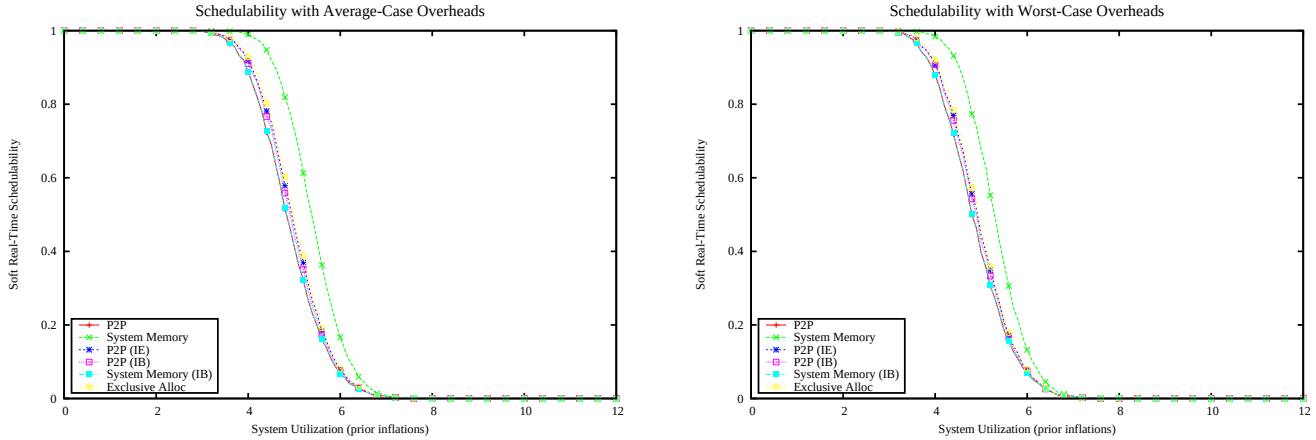

Figure 2680: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

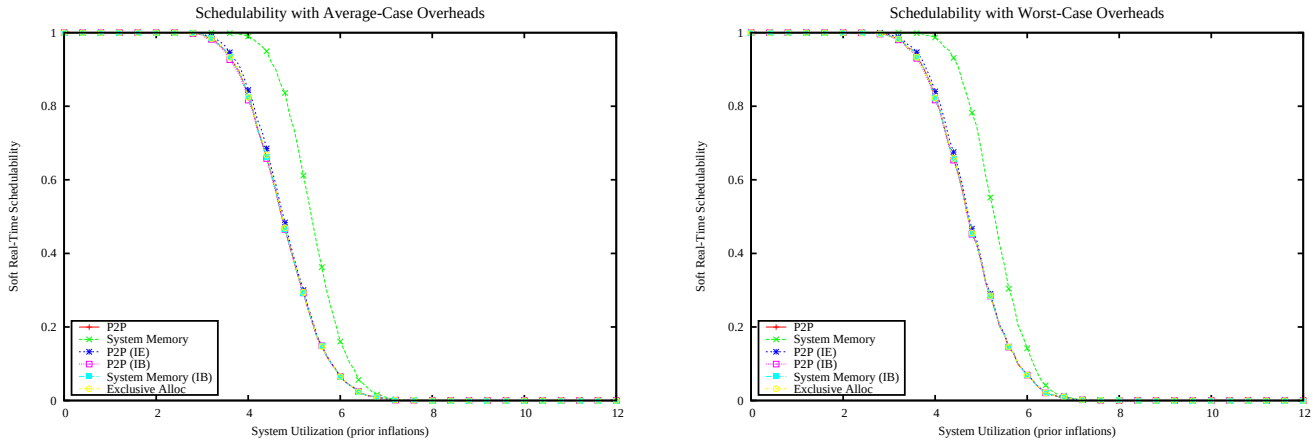

Figure 2681: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

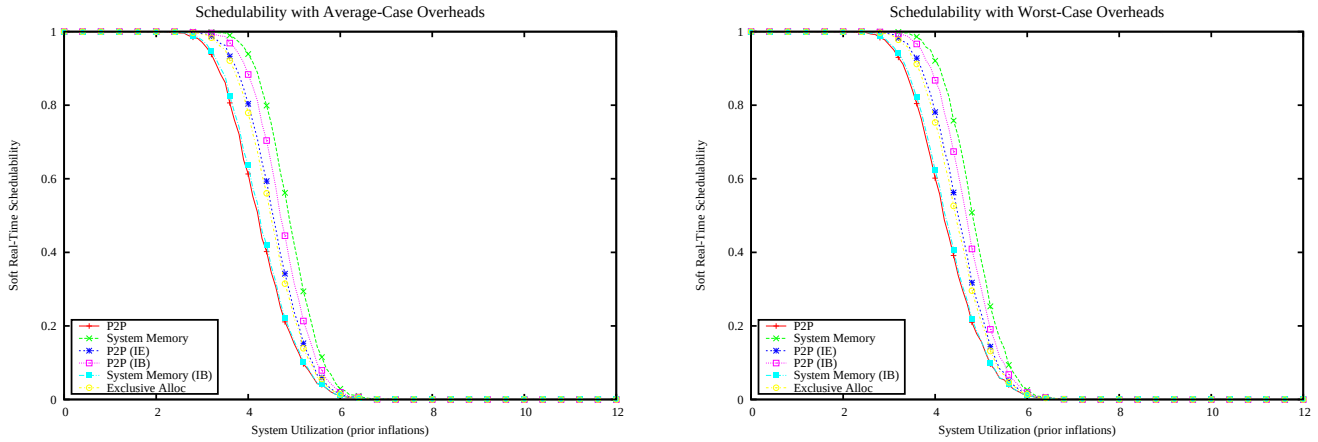

Figure 2682: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

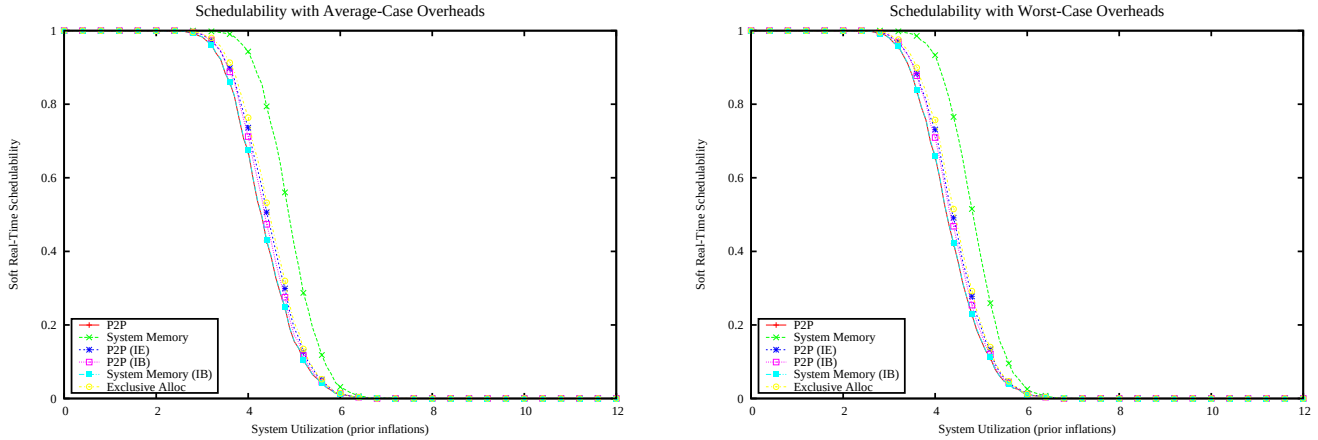

Figure 2683: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

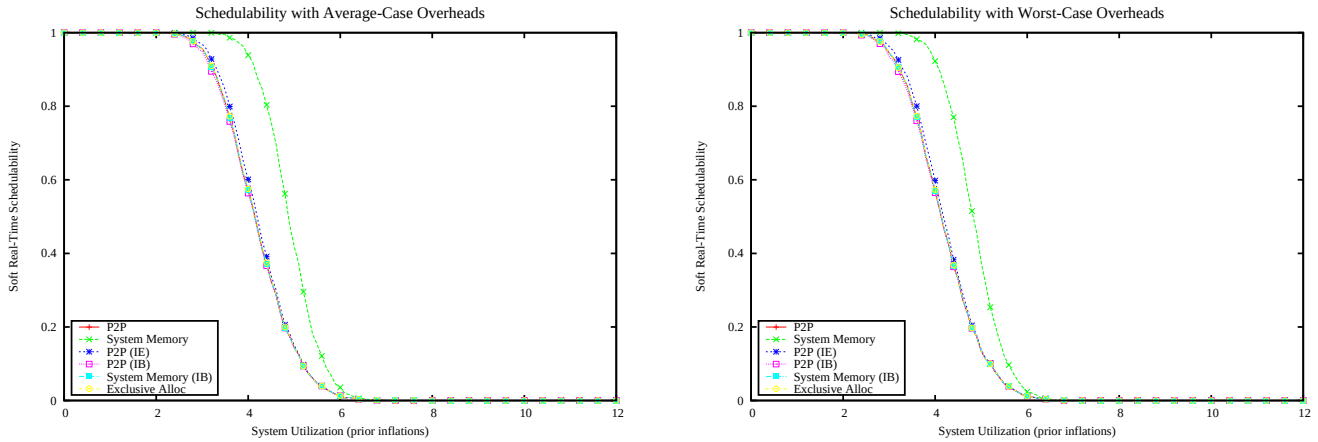

Figure 2684: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

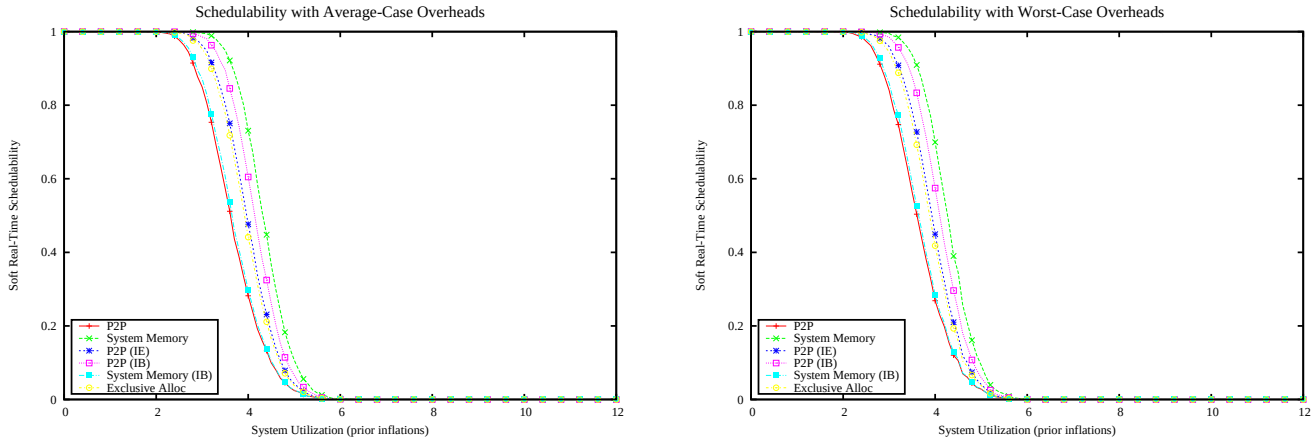

Figure 2685: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

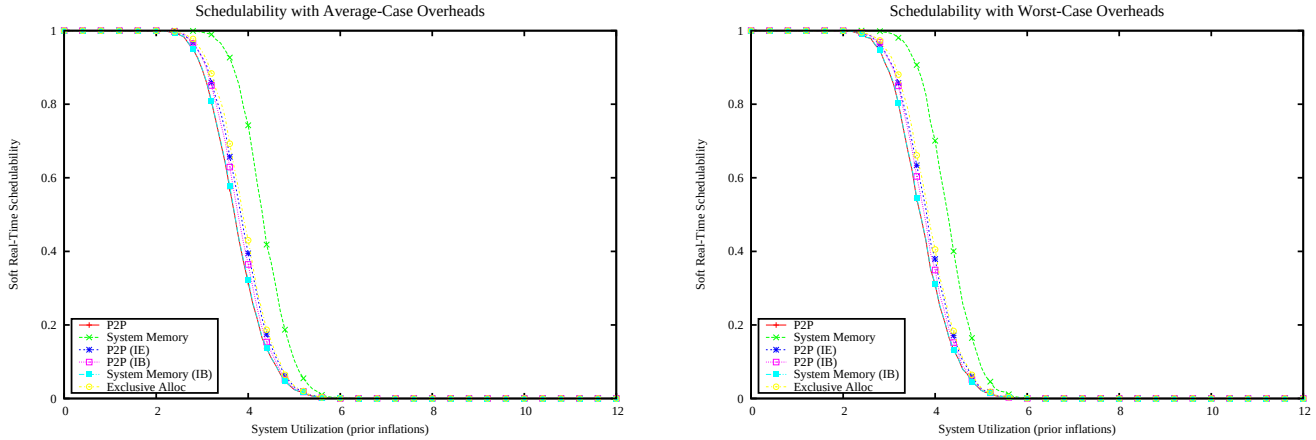

Figure 2686: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

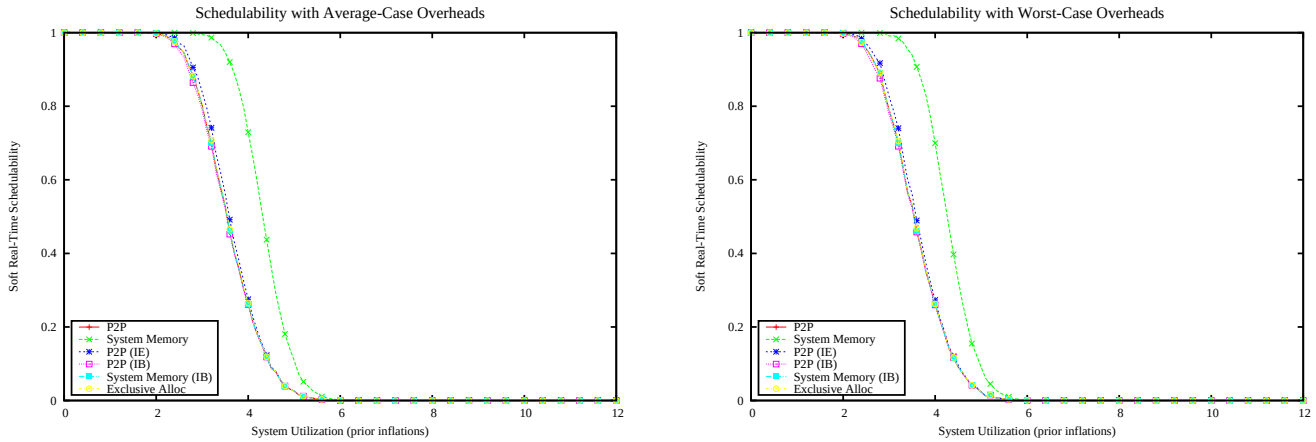

Figure 2687: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

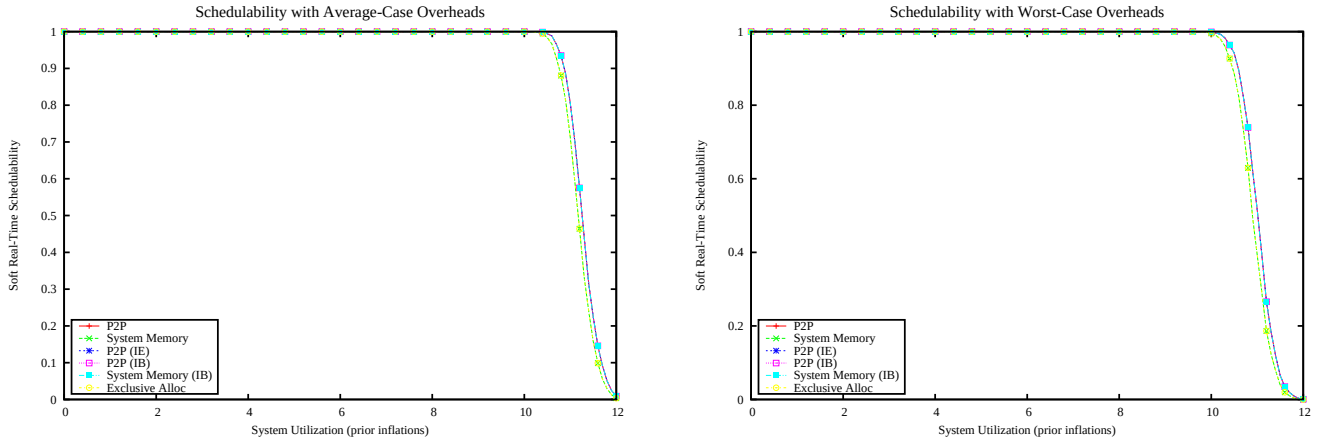

Figure 2688: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

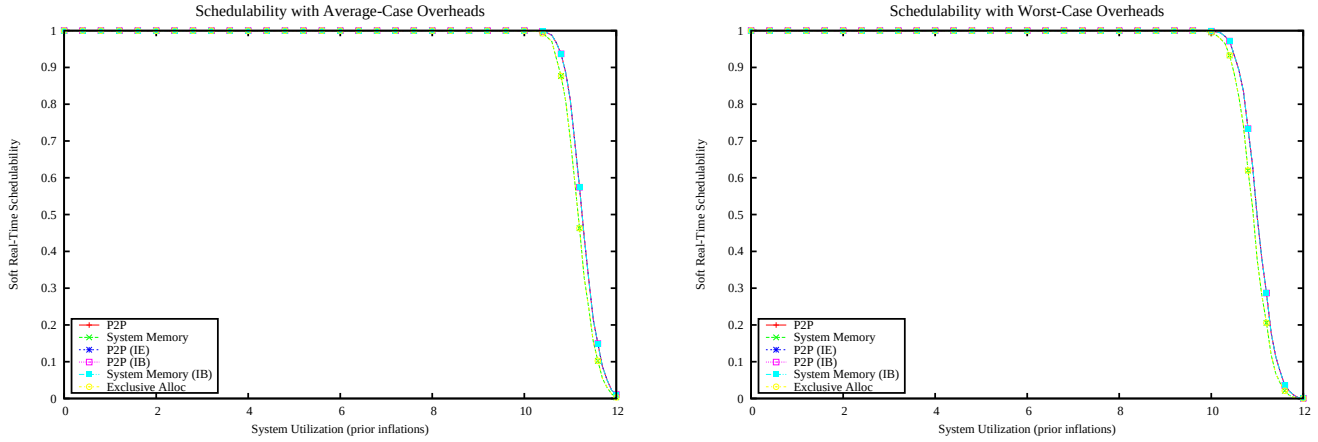

Figure 2689: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

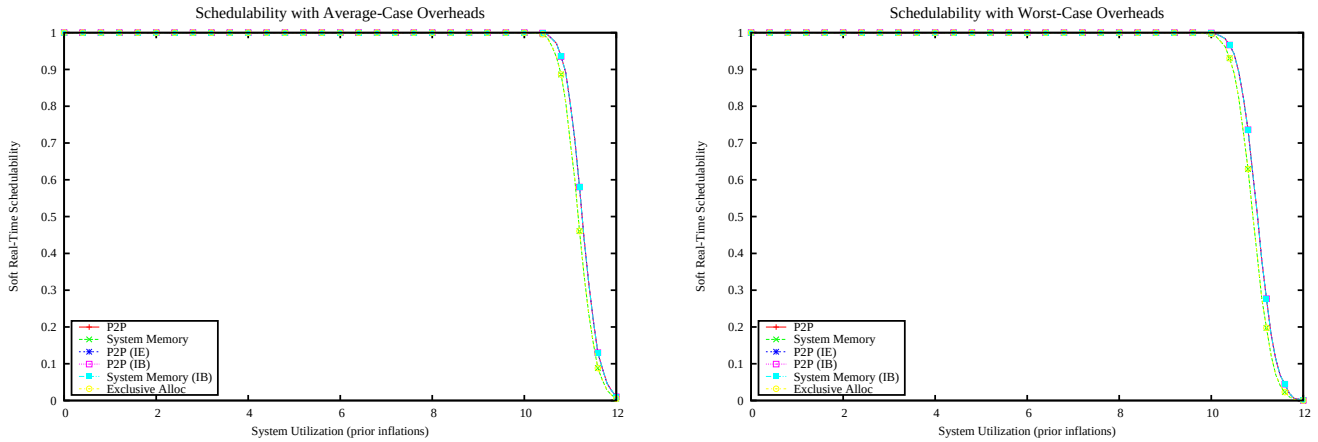

Figure 2690: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

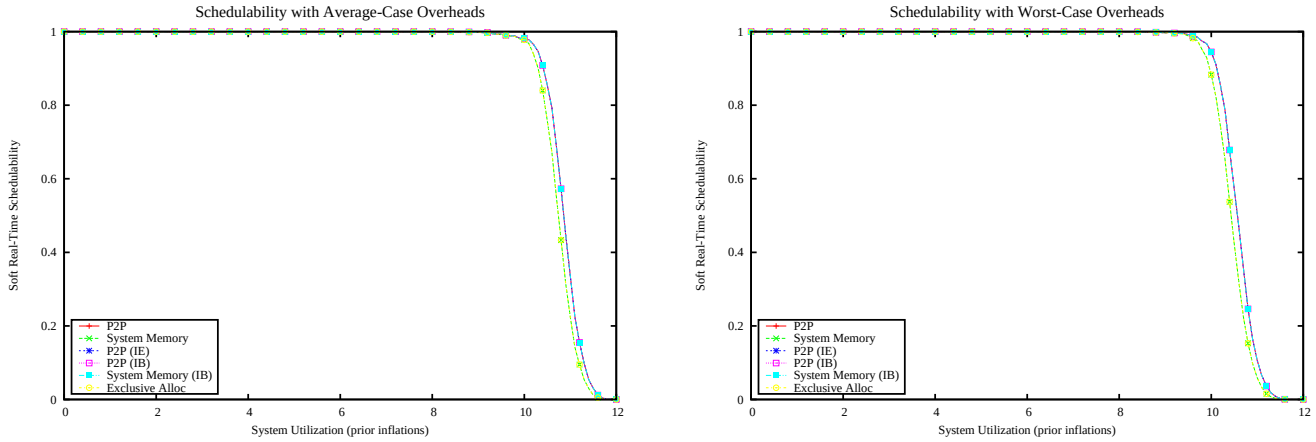

Figure 2691: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

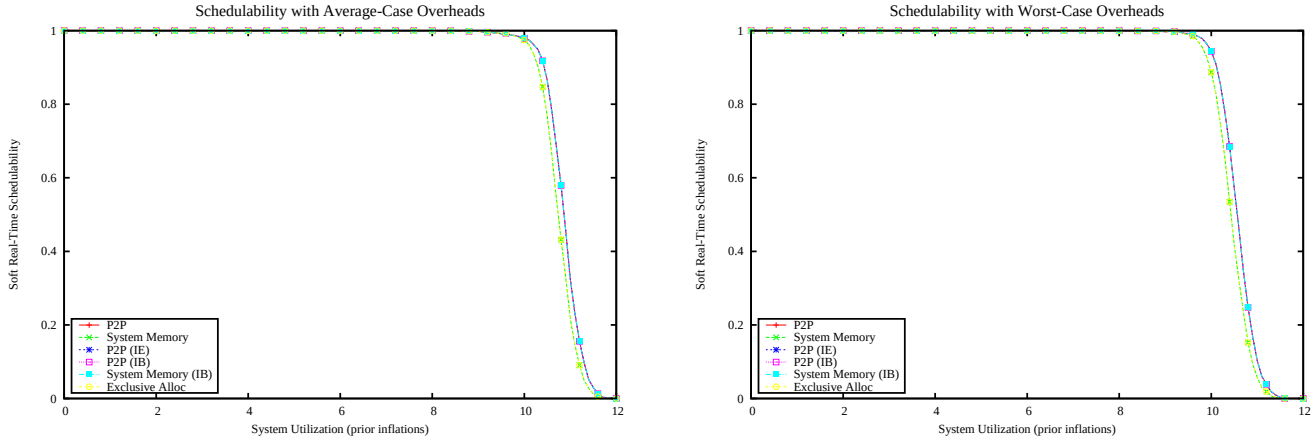

Figure 2692: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

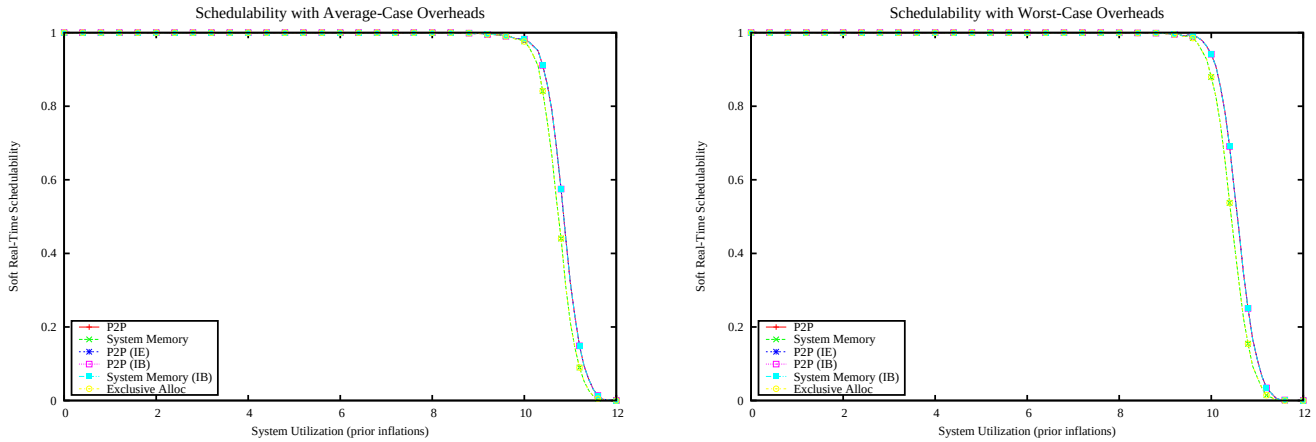

Figure 2693: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

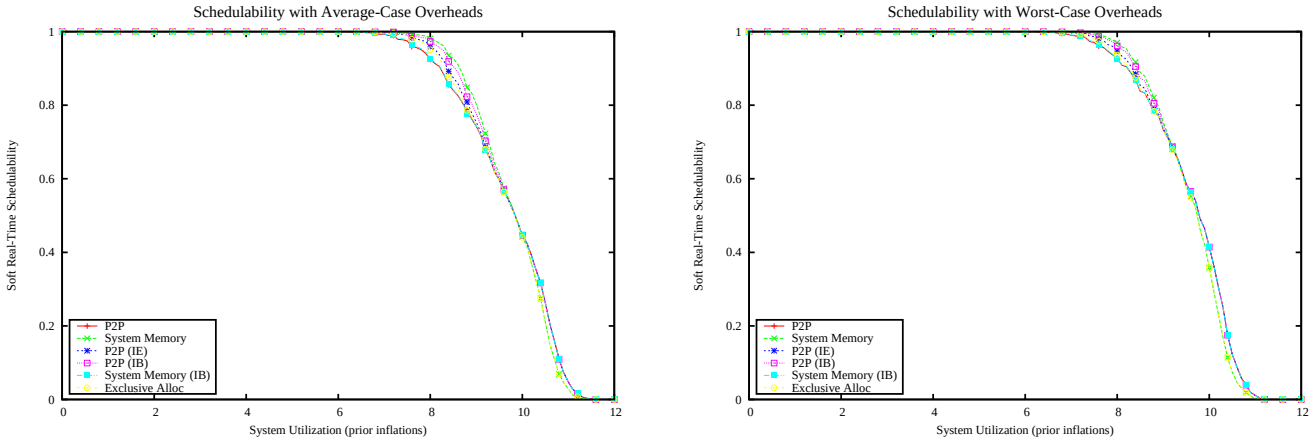

Figure 2694: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

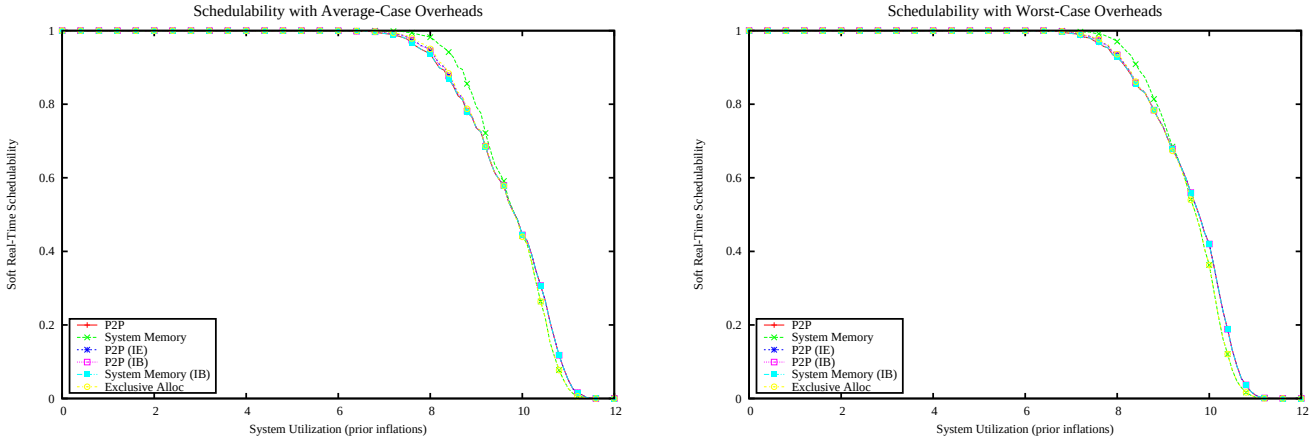

Figure 2695: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

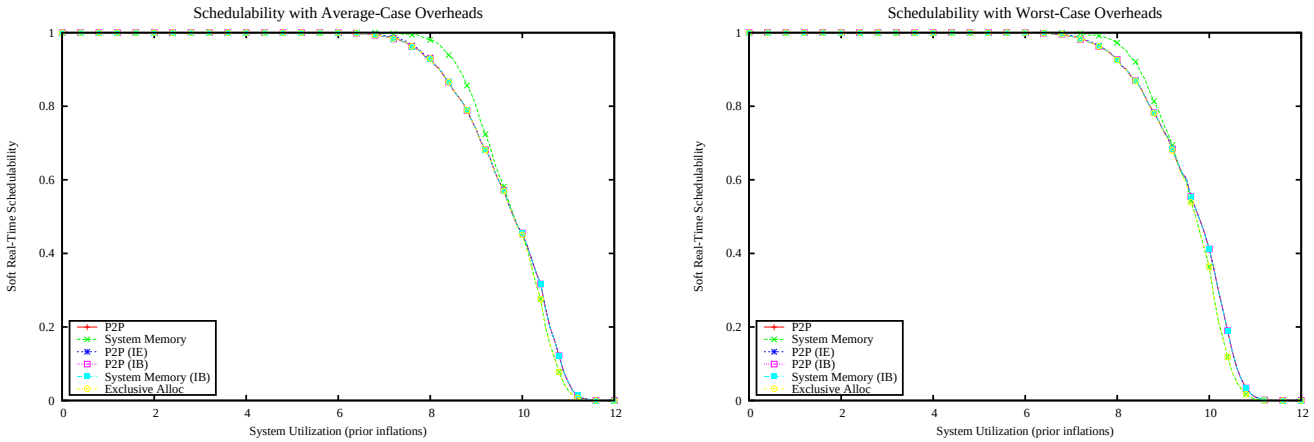

Figure 2696: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

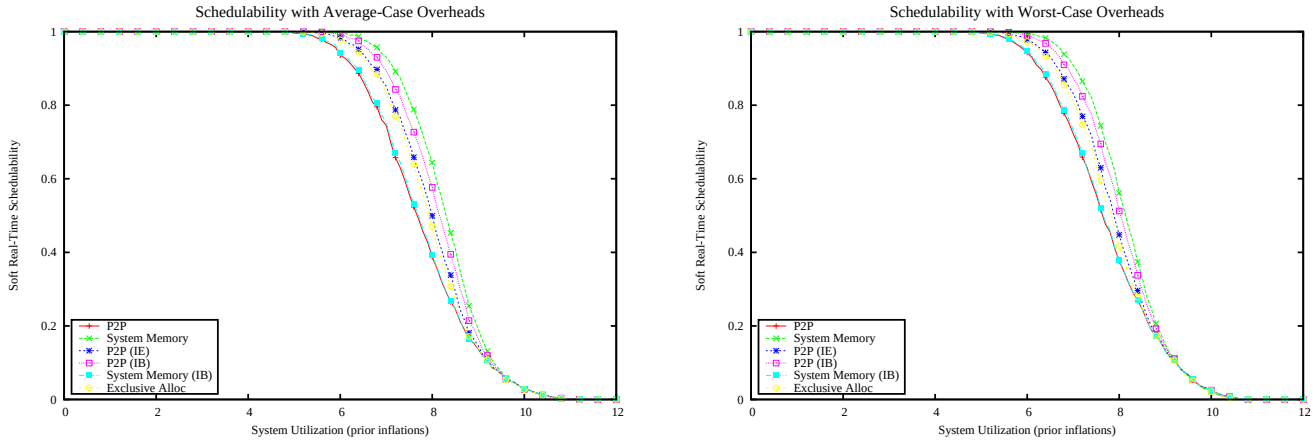

Figure 2697: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

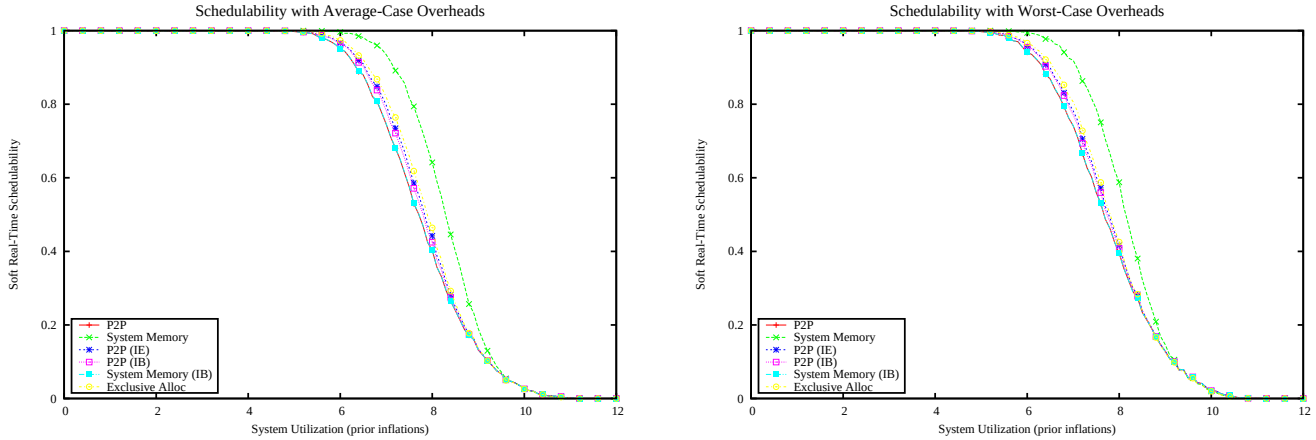

Figure 2698: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

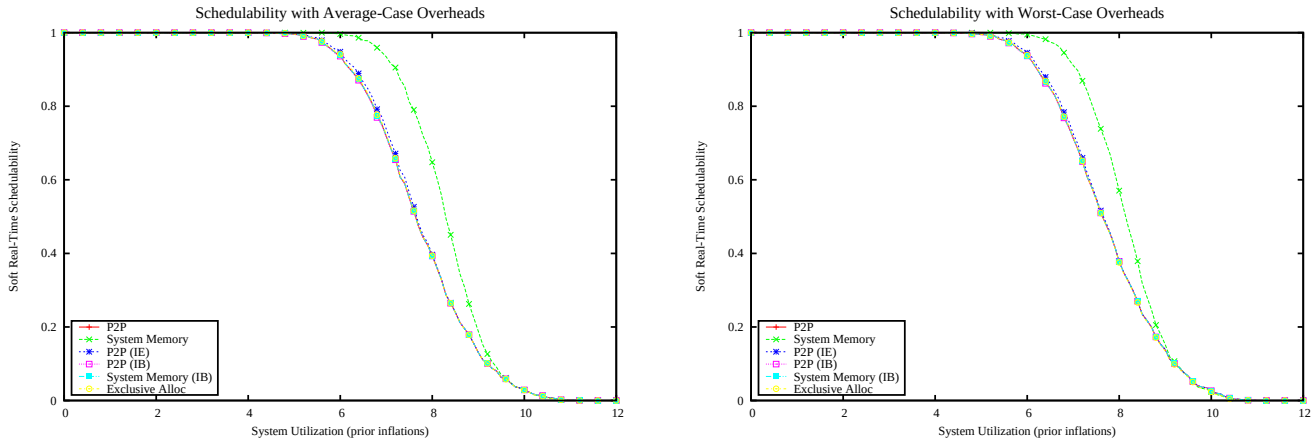

Figure 2699: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

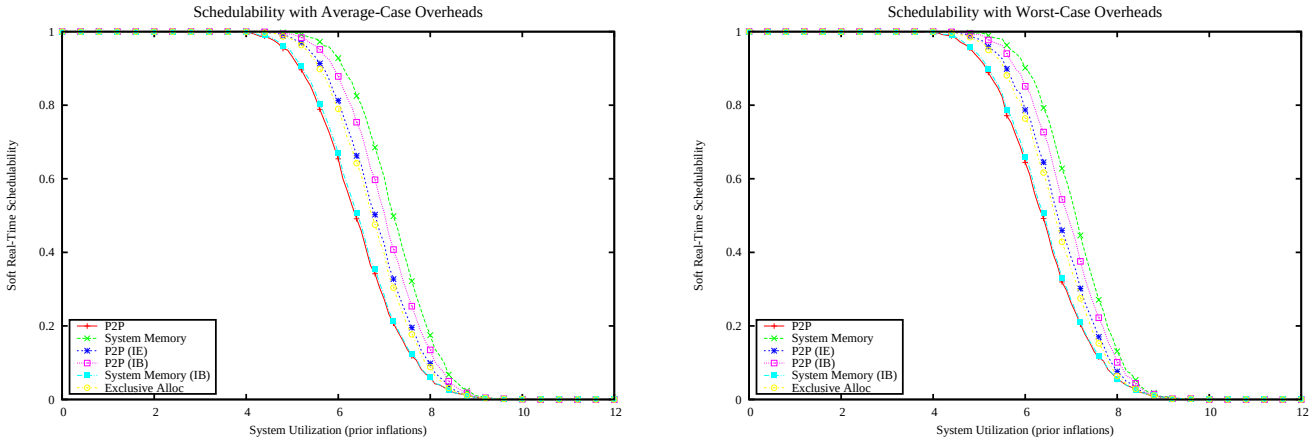

Figure 2700: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

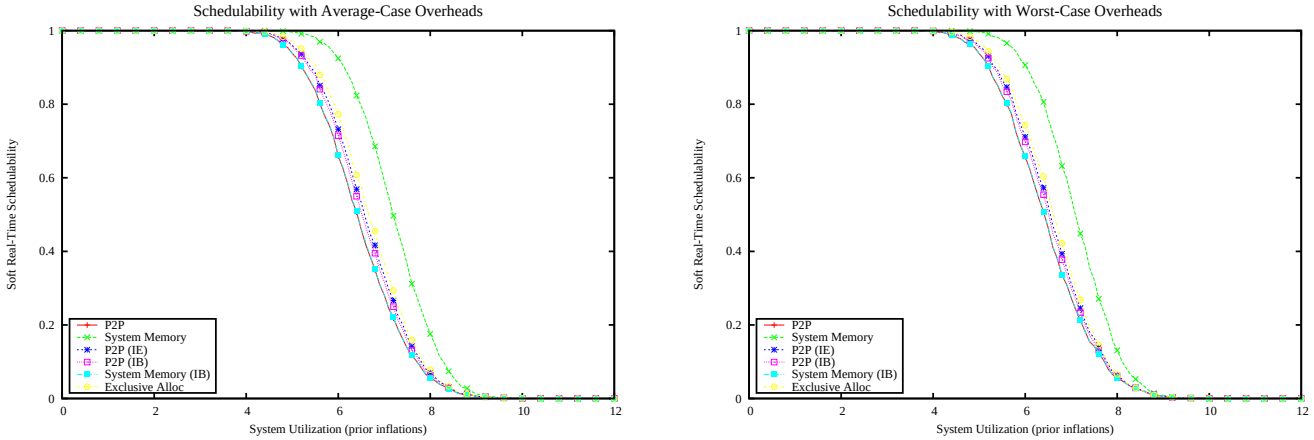

Figure 2701: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

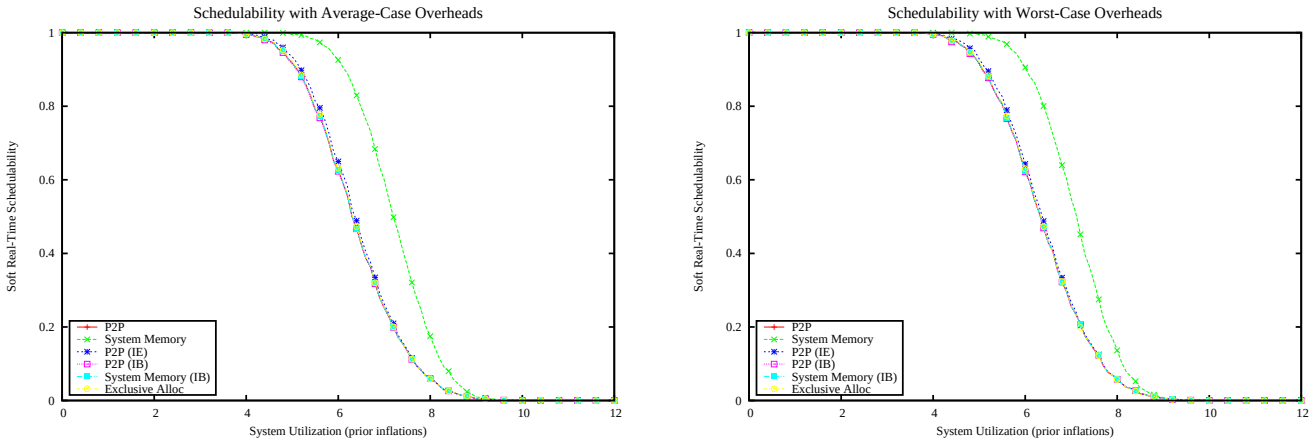

Figure 2702: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

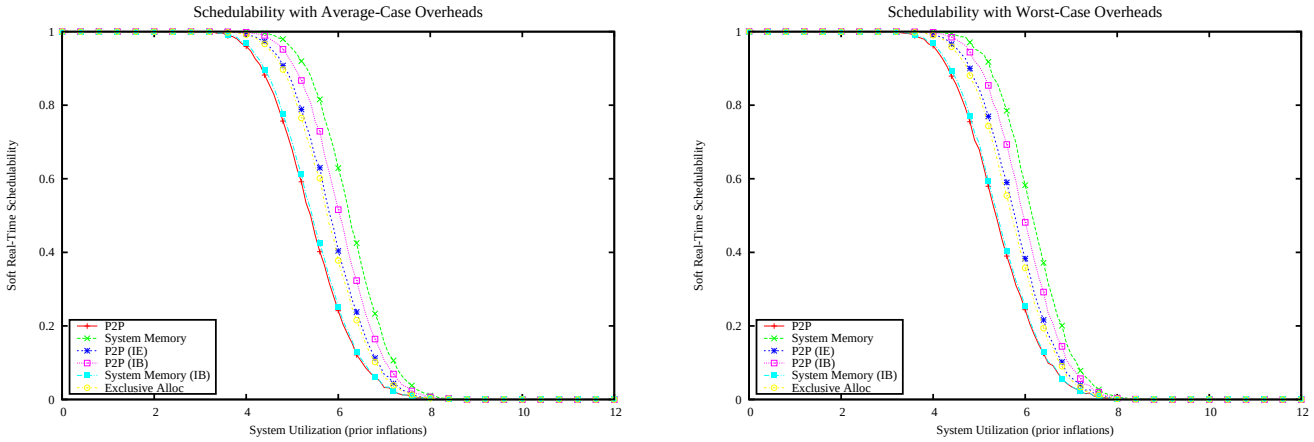

Figure 2703: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

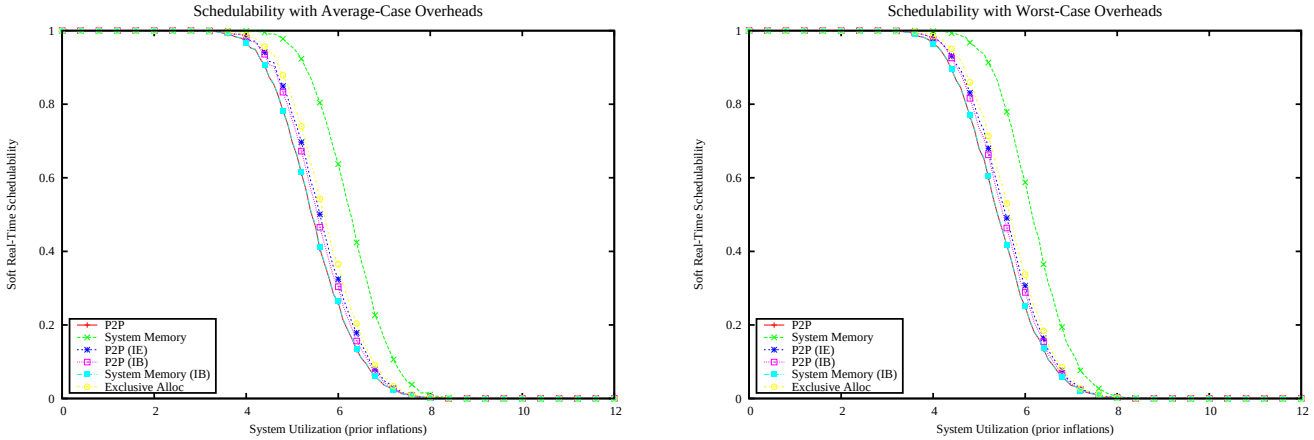

Figure 2704: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

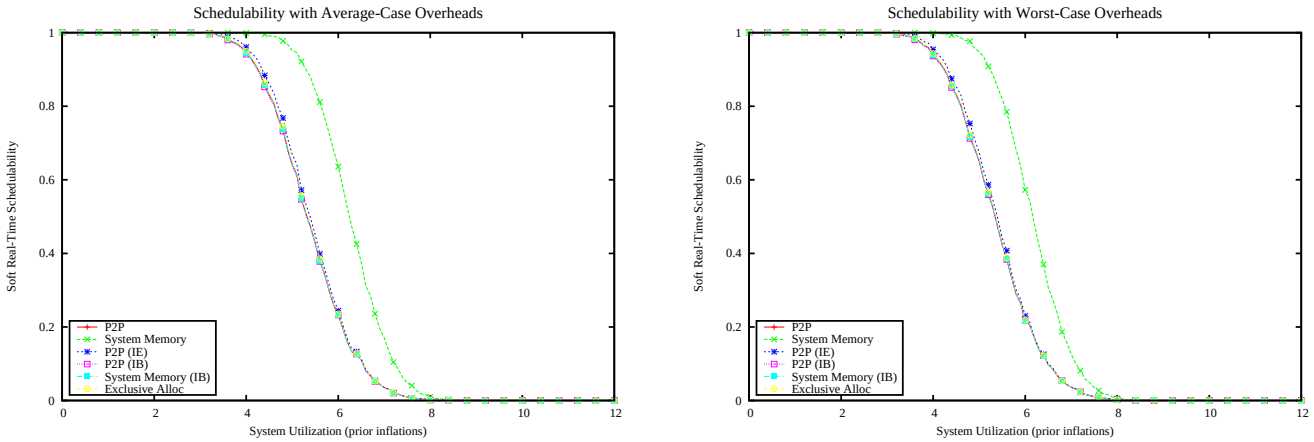

Figure 2705: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

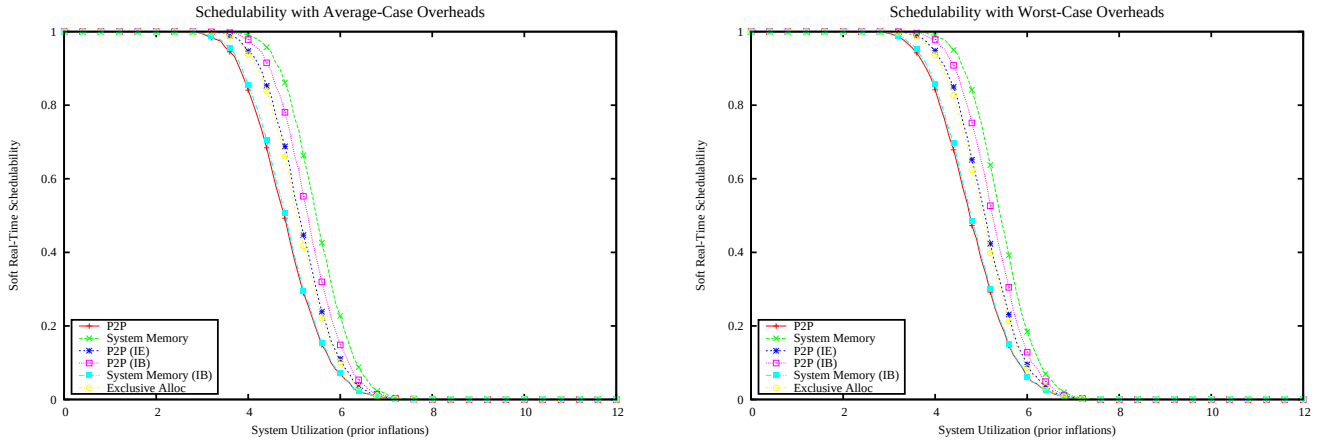

Figure 2706: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

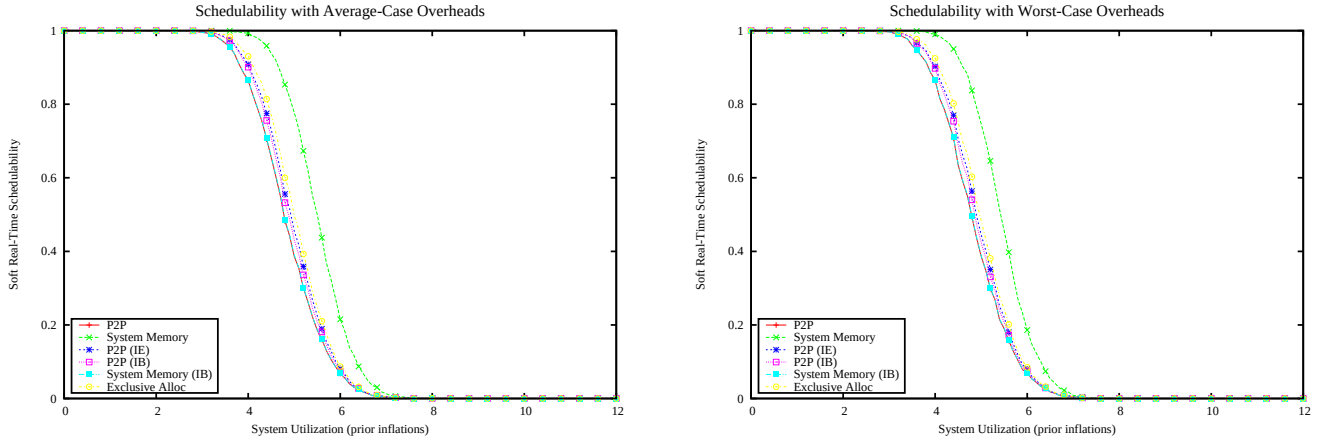

Figure 2707: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

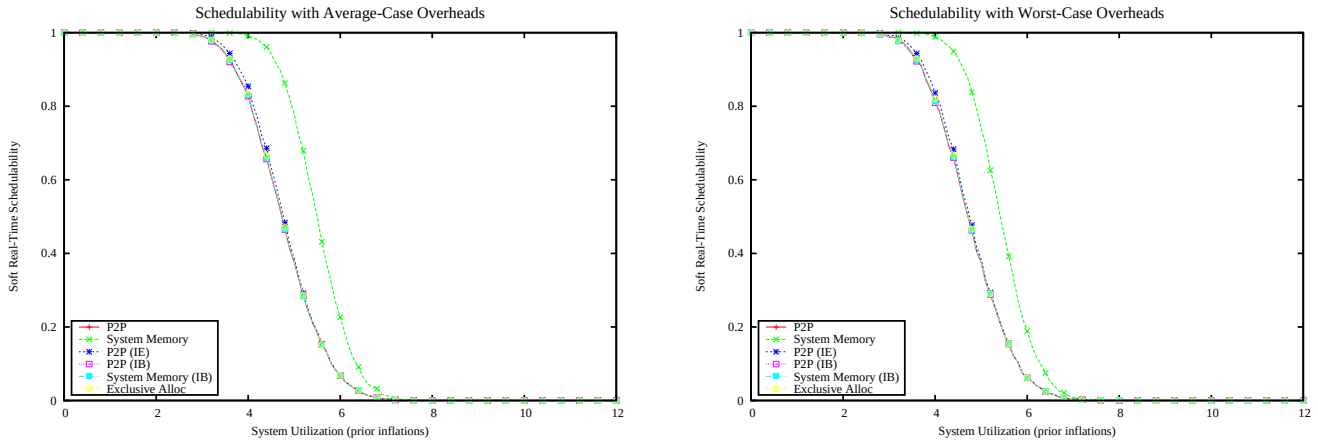

Figure 2708: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

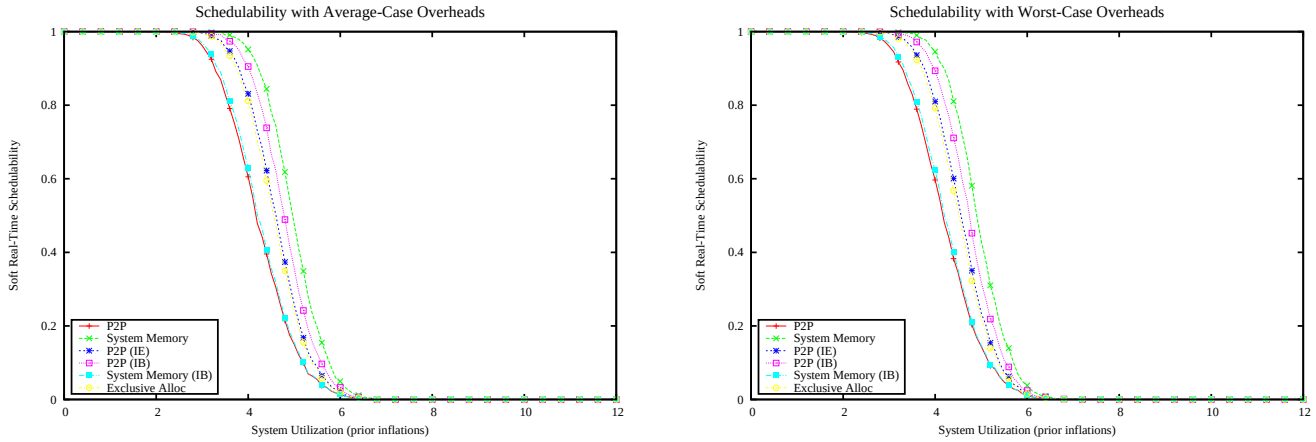

Figure 2709: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

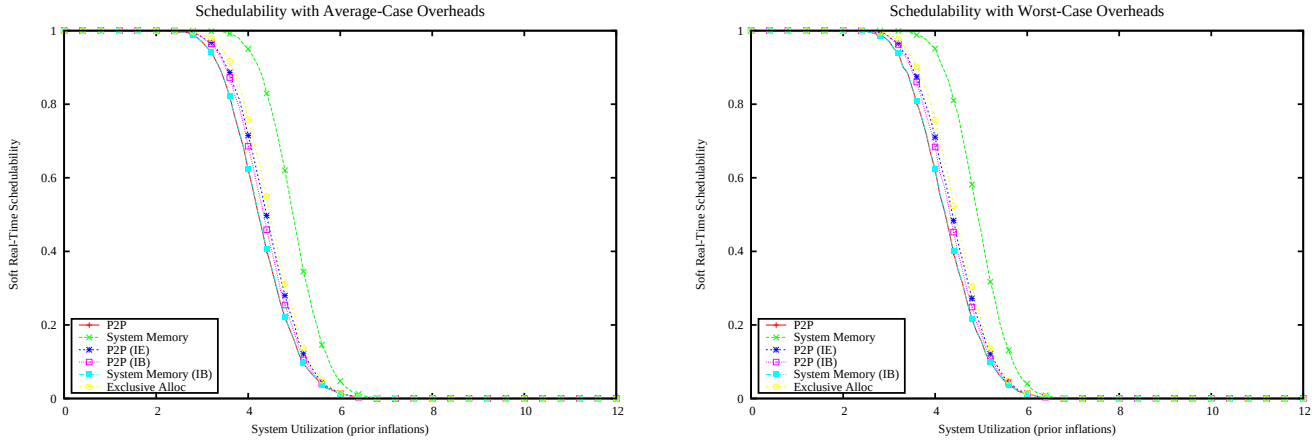

Figure 2710: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

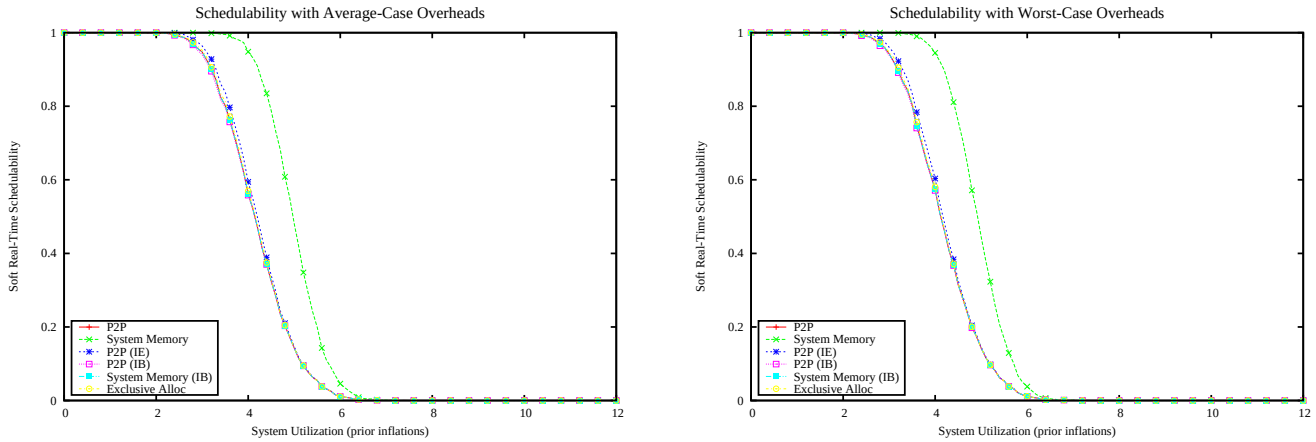

Figure 2711: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

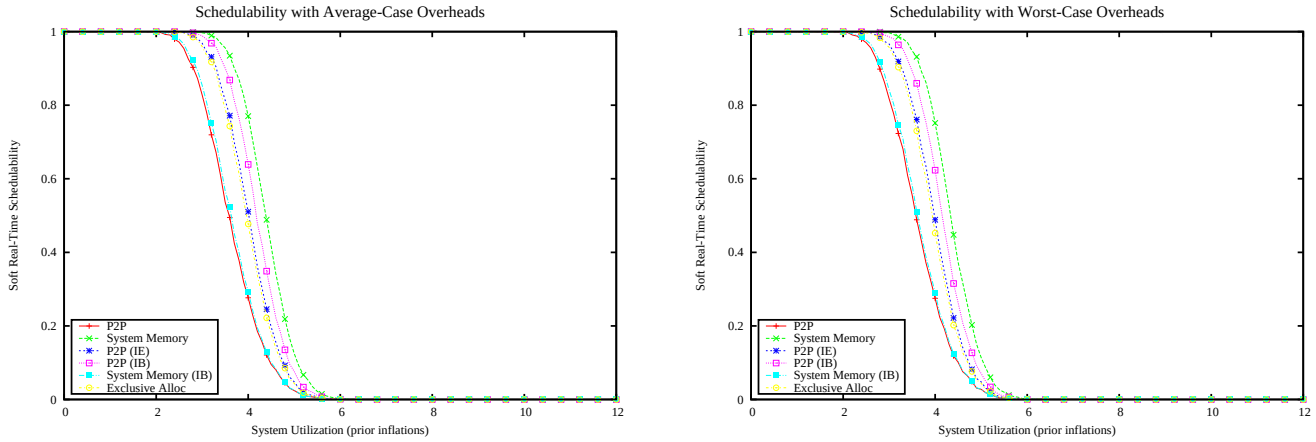

Figure 2712: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

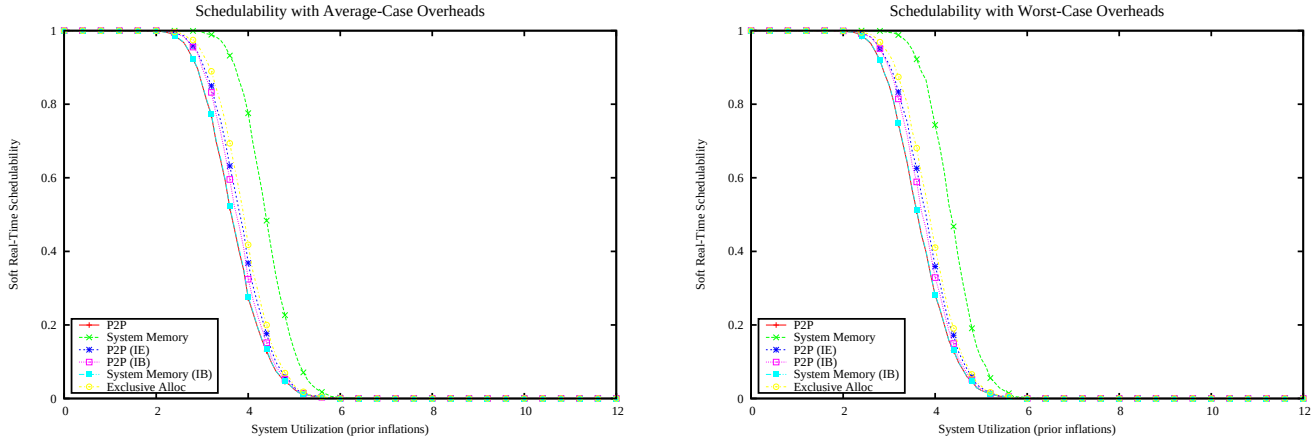

Figure 2713: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

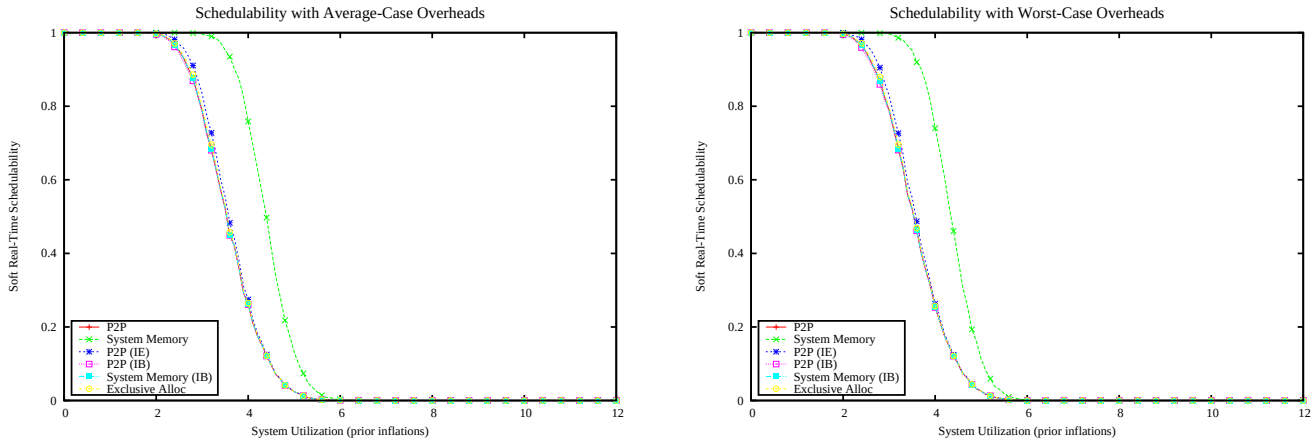

Figure 2714: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

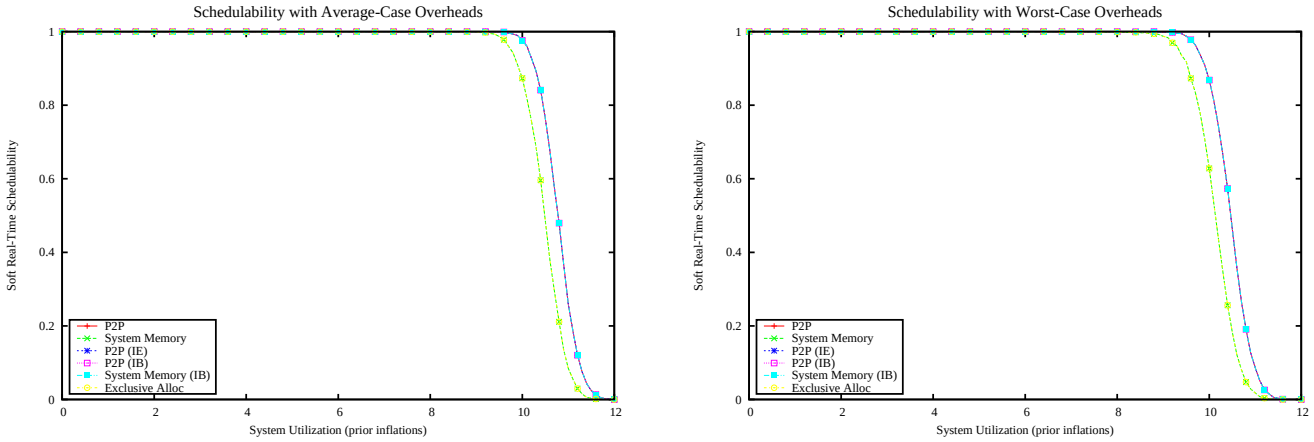

Figure 2715: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

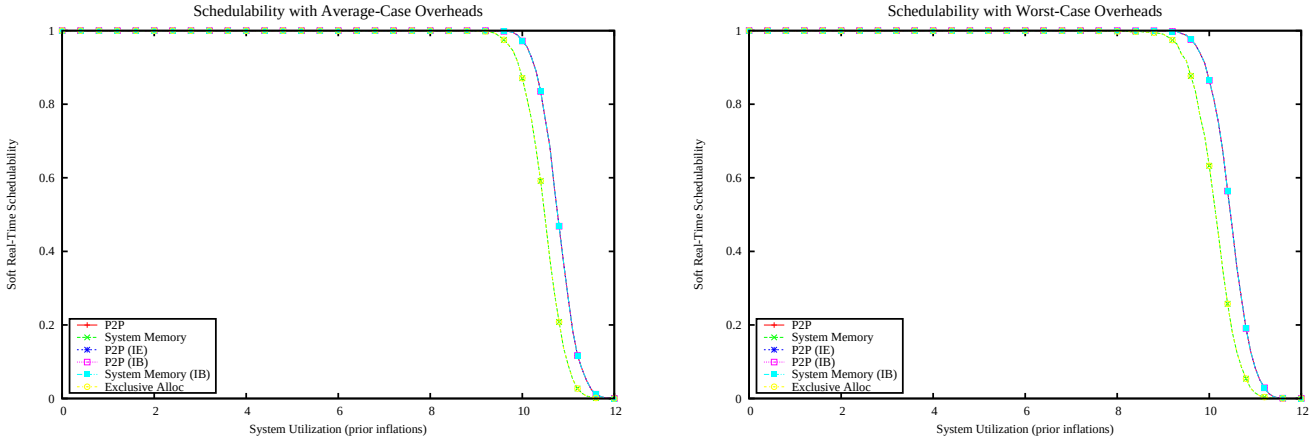

Figure 2716: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

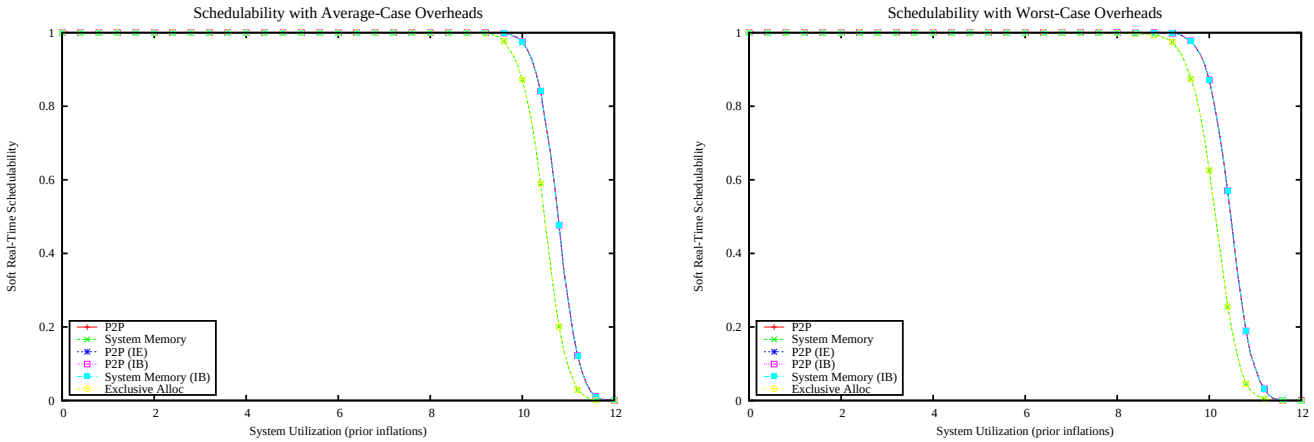

Figure 2717: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

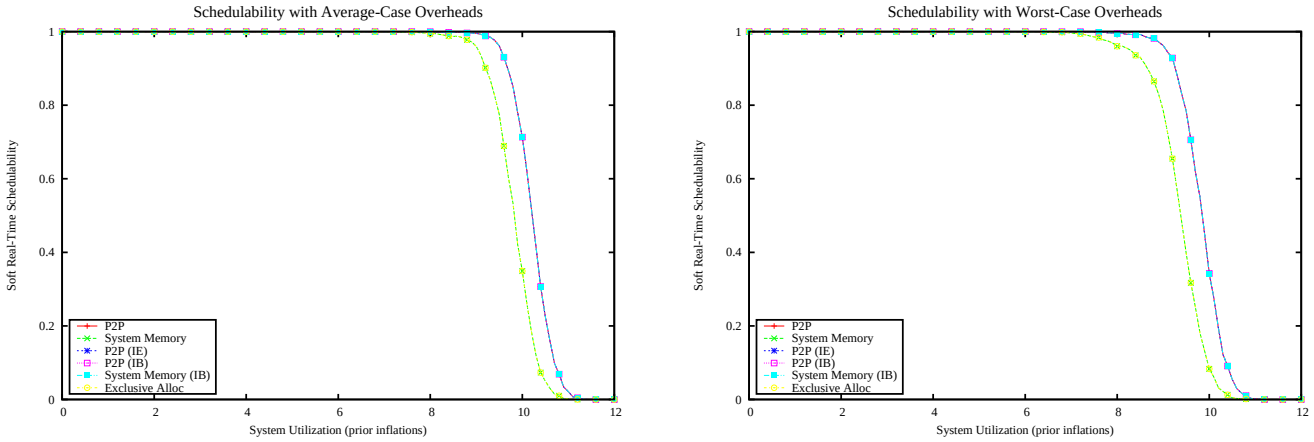

Figure 2718: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

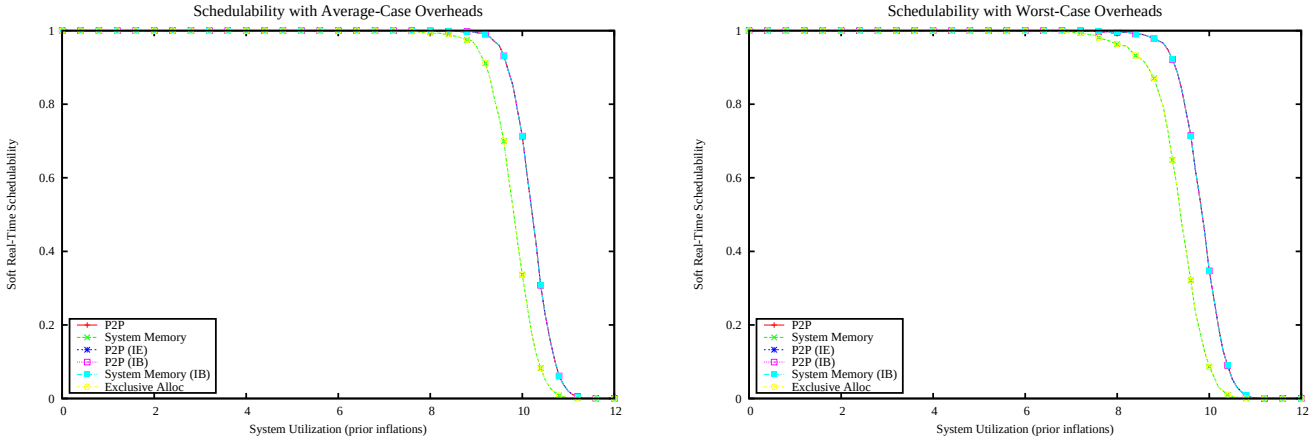

Figure 2719: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

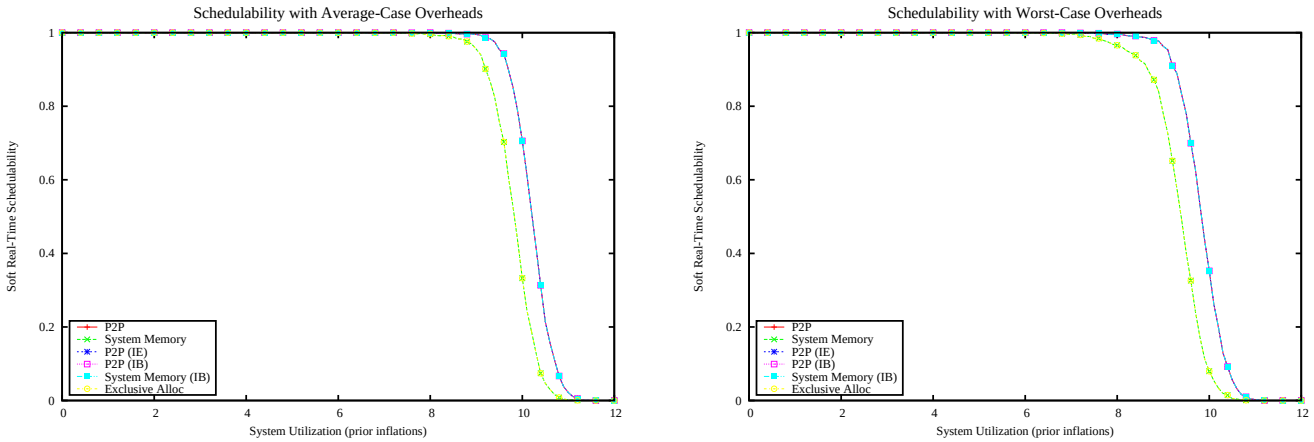

Figure 2720: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

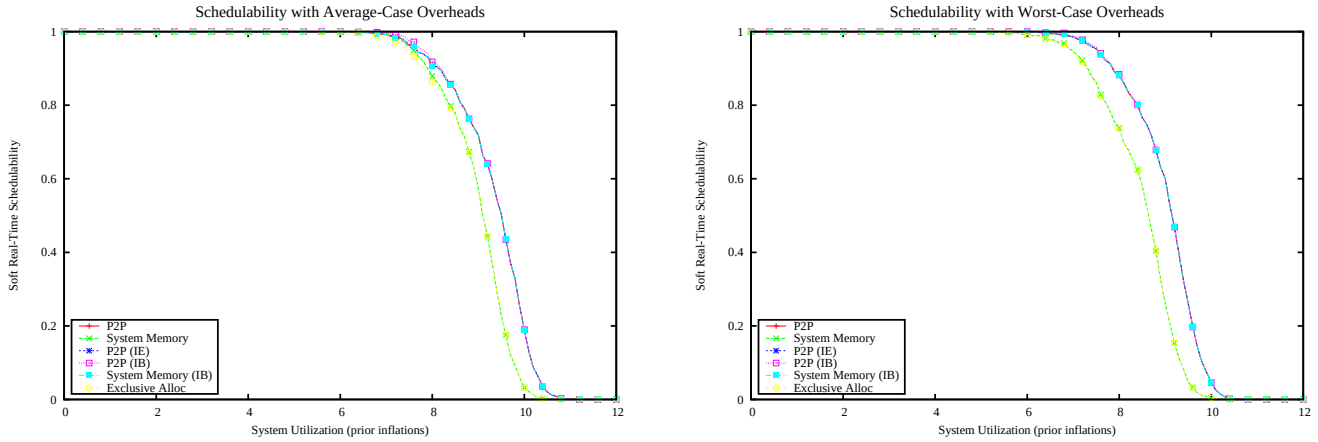

Figure 2721: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

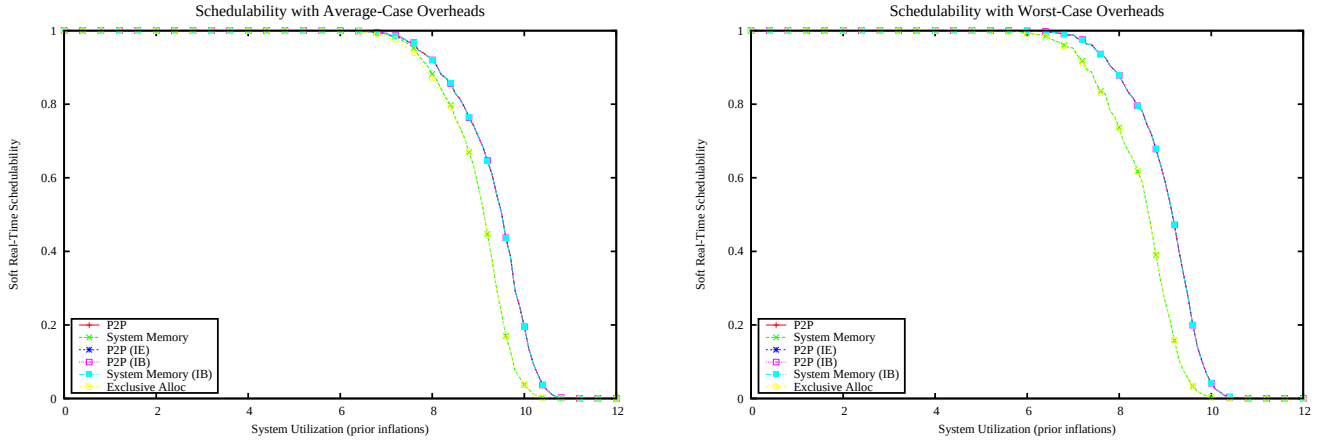

Figure 2722: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

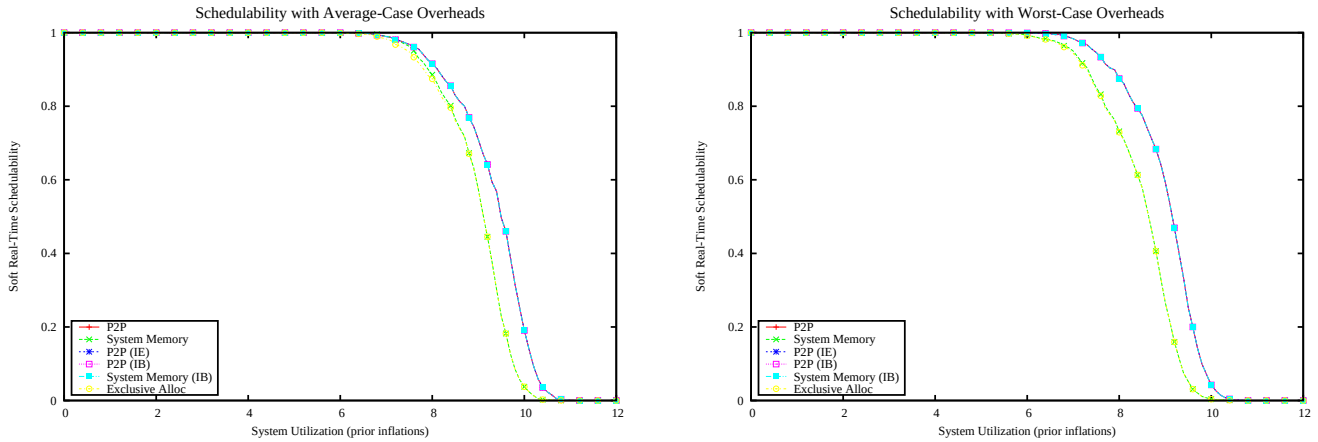

Figure 2723: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

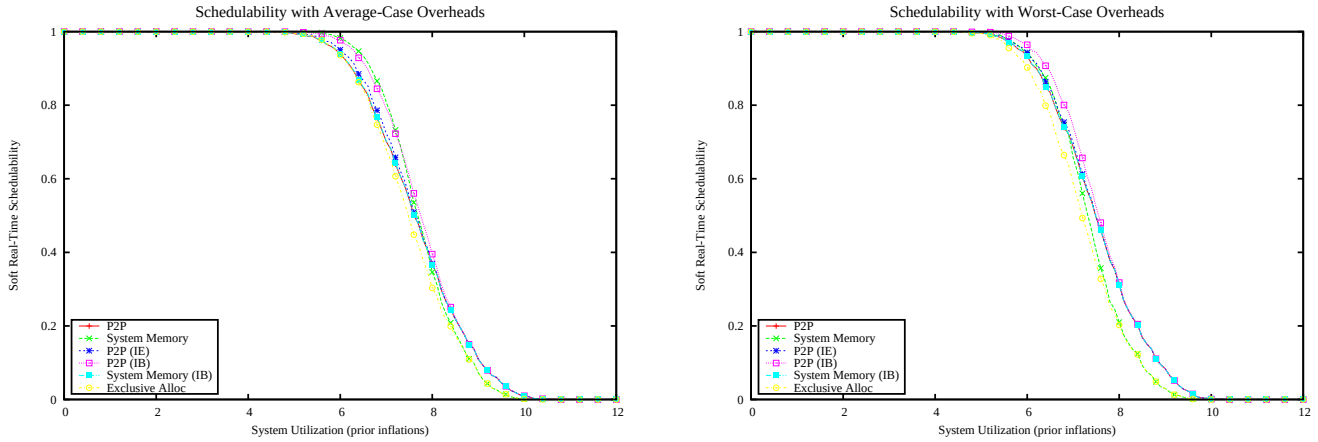

Figure 2724: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

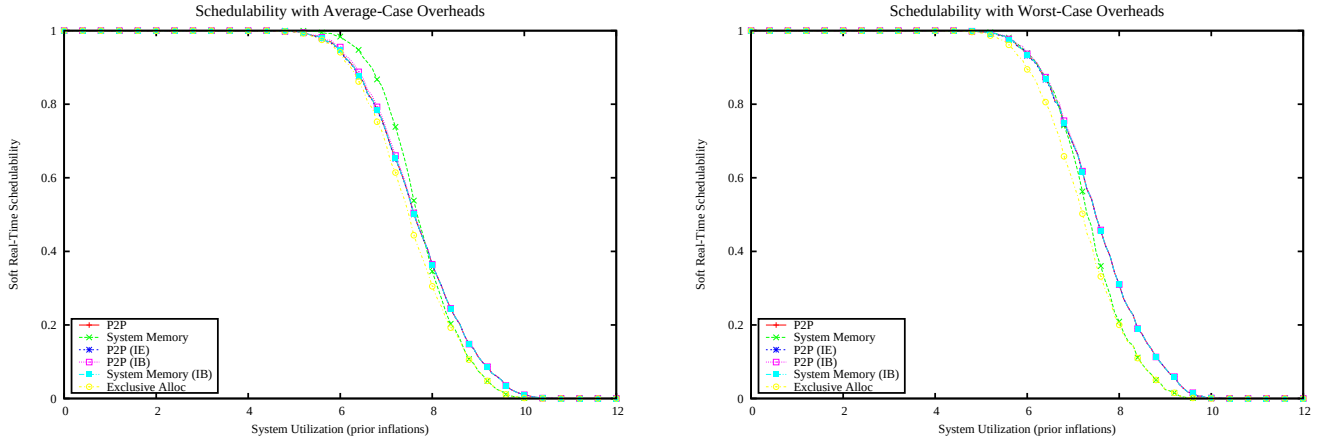

Figure 2725: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

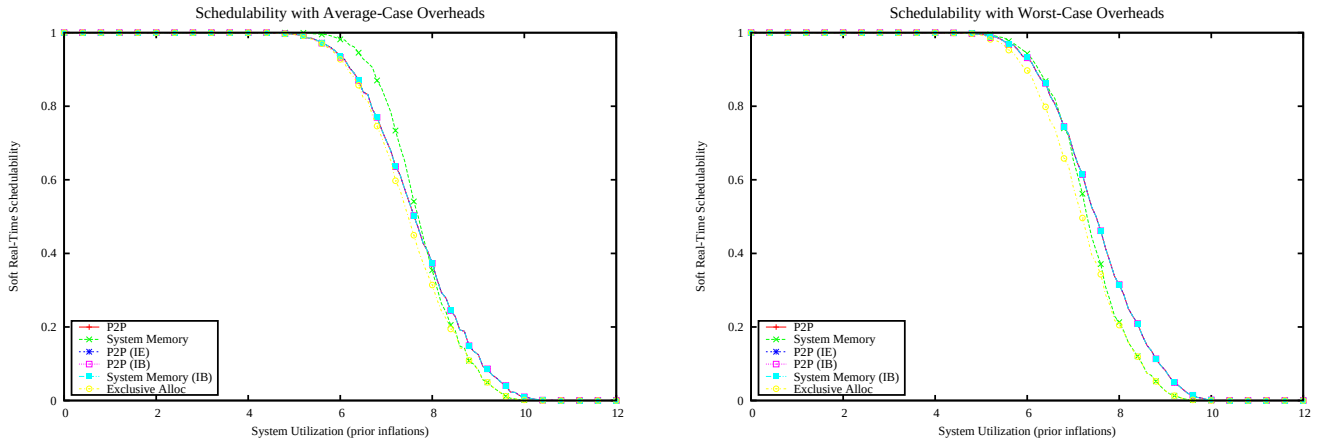

Figure 2726: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

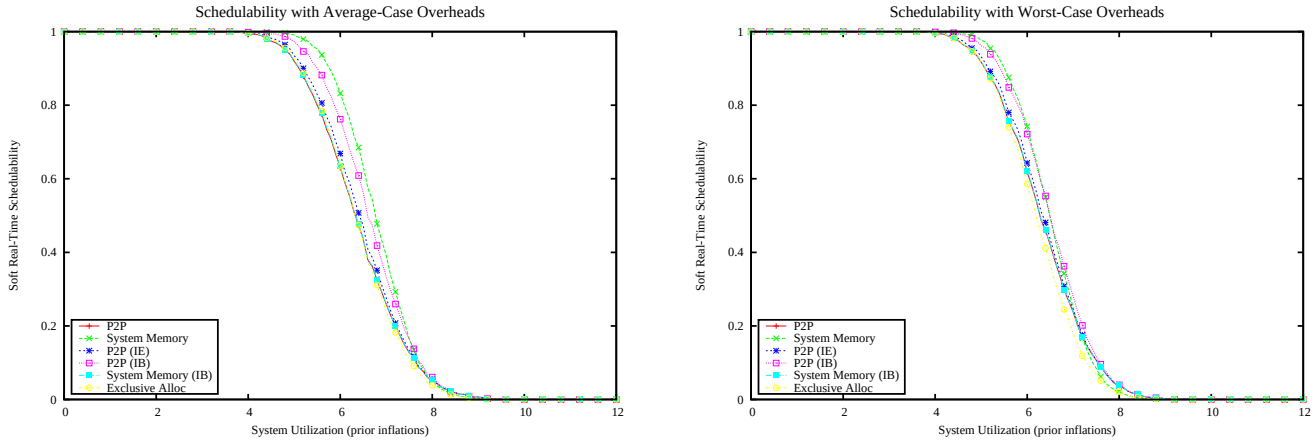

Figure 2727: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

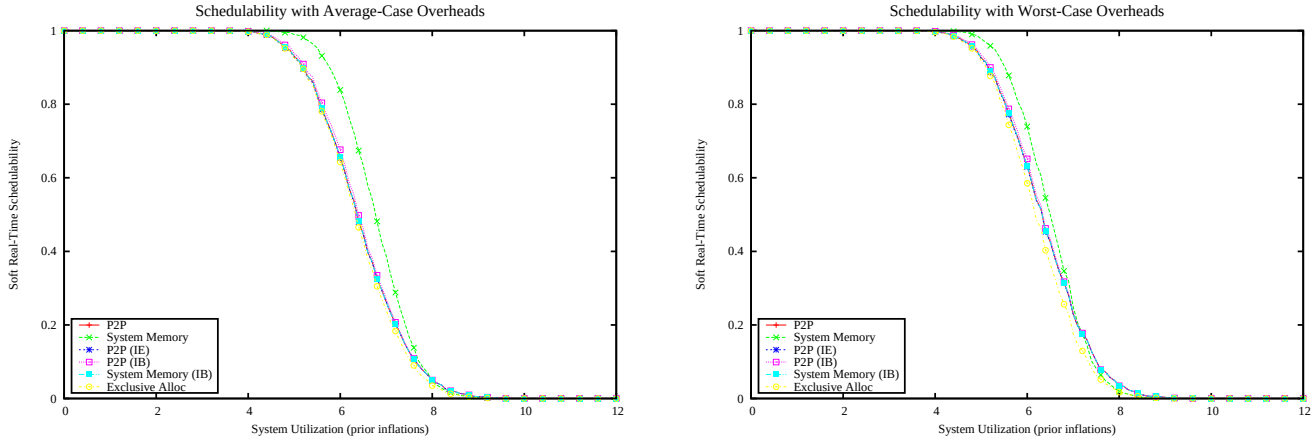

Figure 2728: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

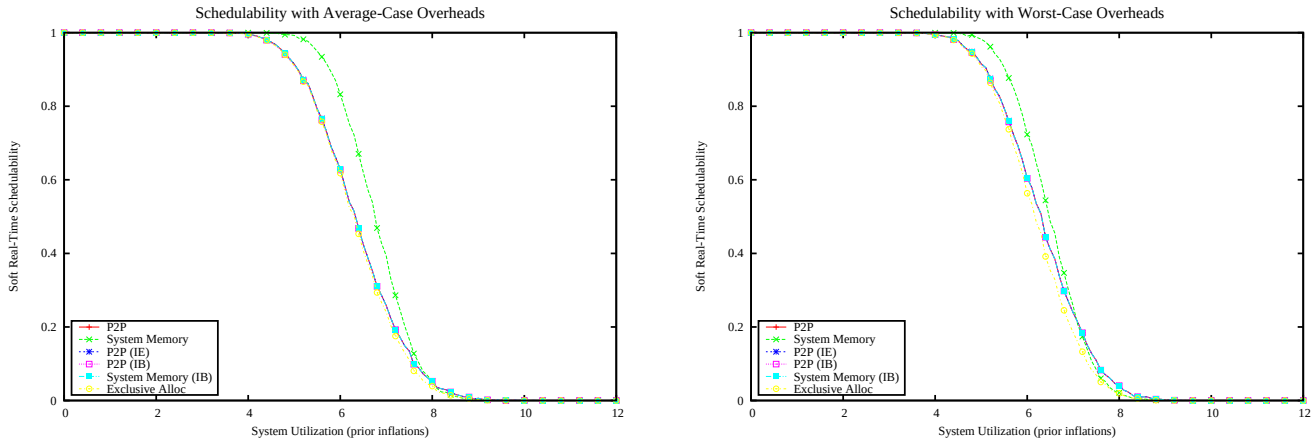

Figure 2729: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

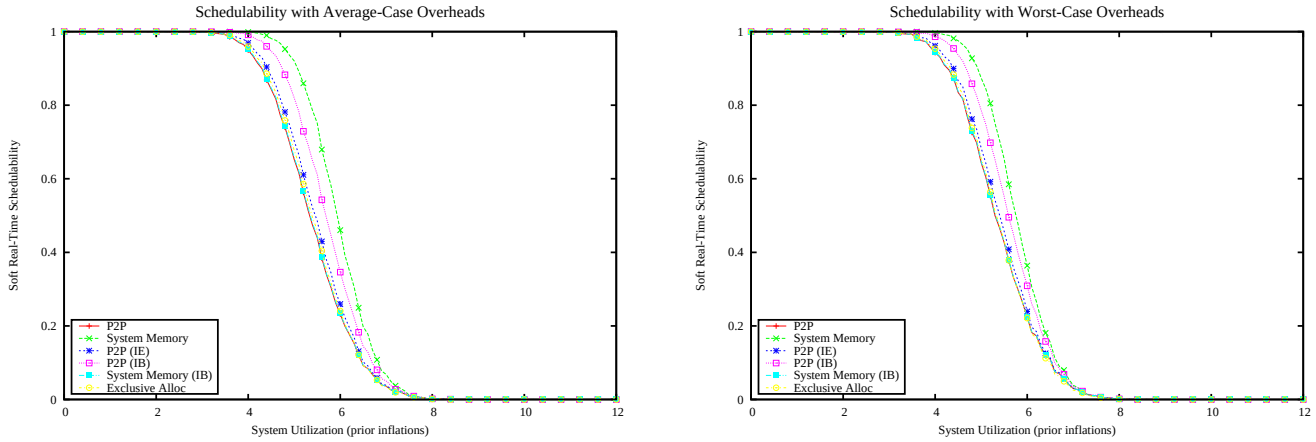

Figure 2730: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

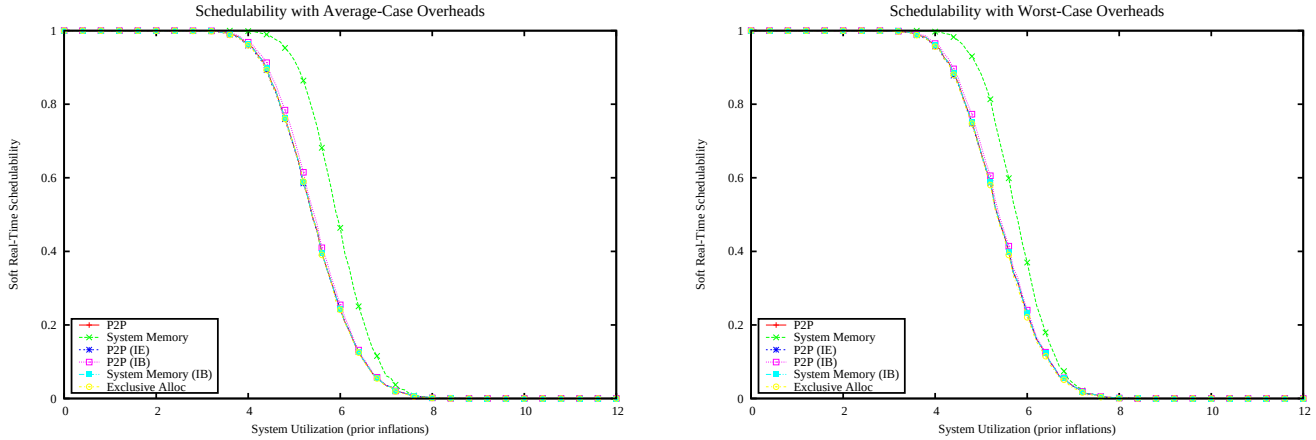

Figure 2731: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

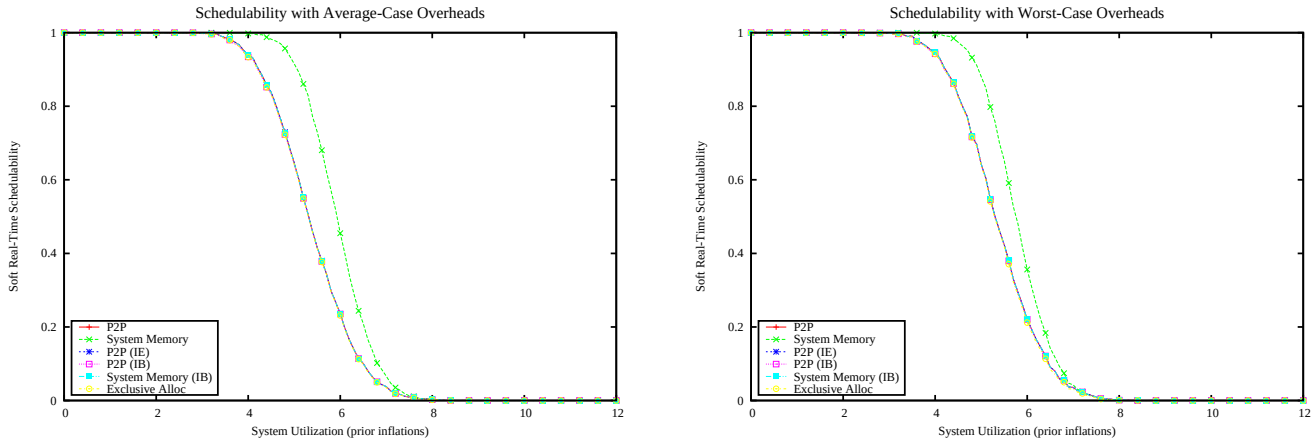

Figure 2732: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

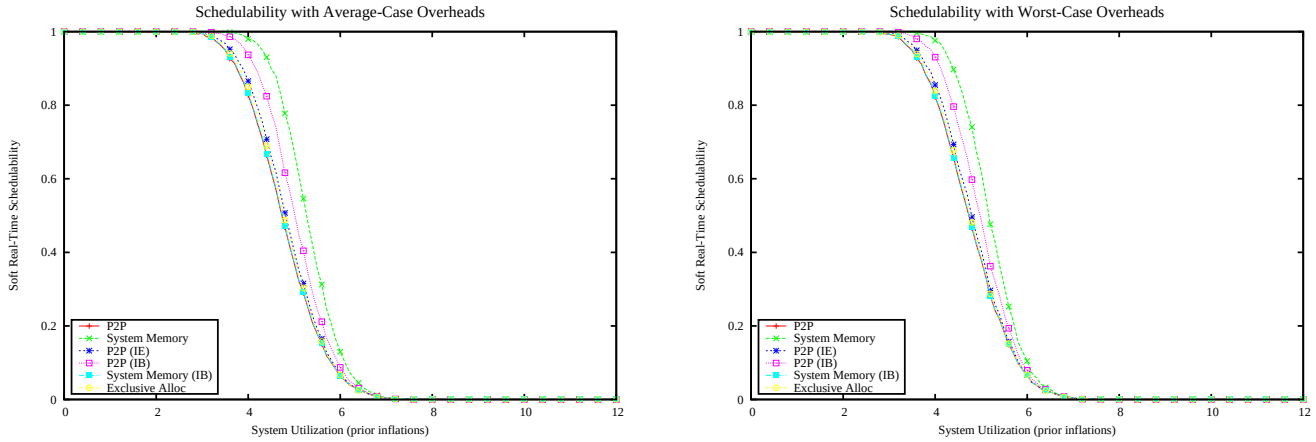

Figure 2733: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

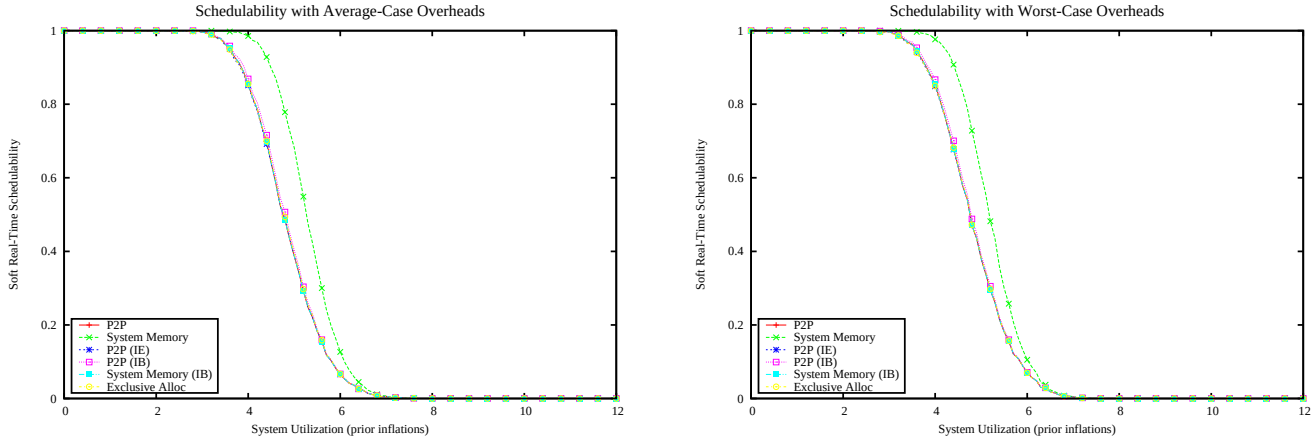

Figure 2734: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

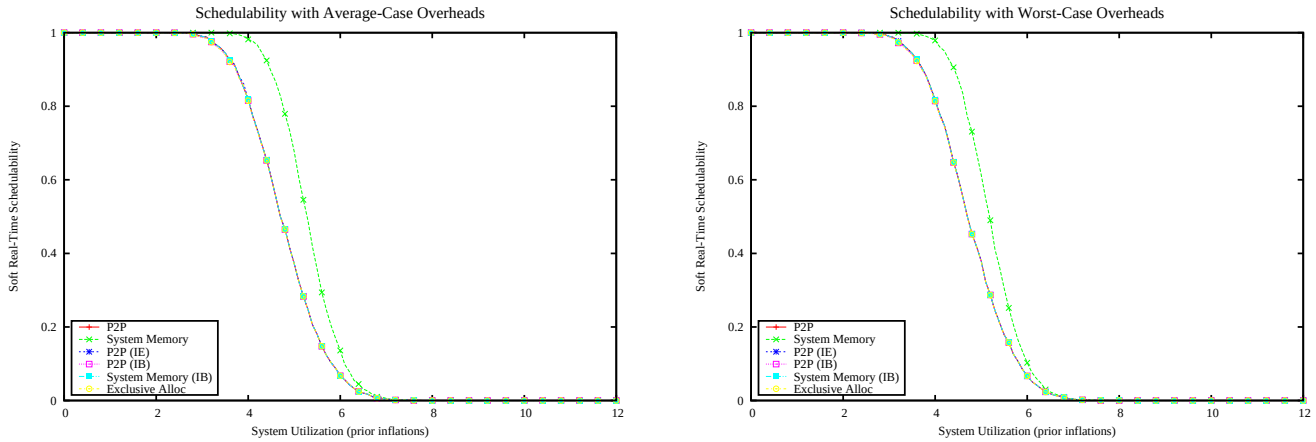

Figure 2735: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

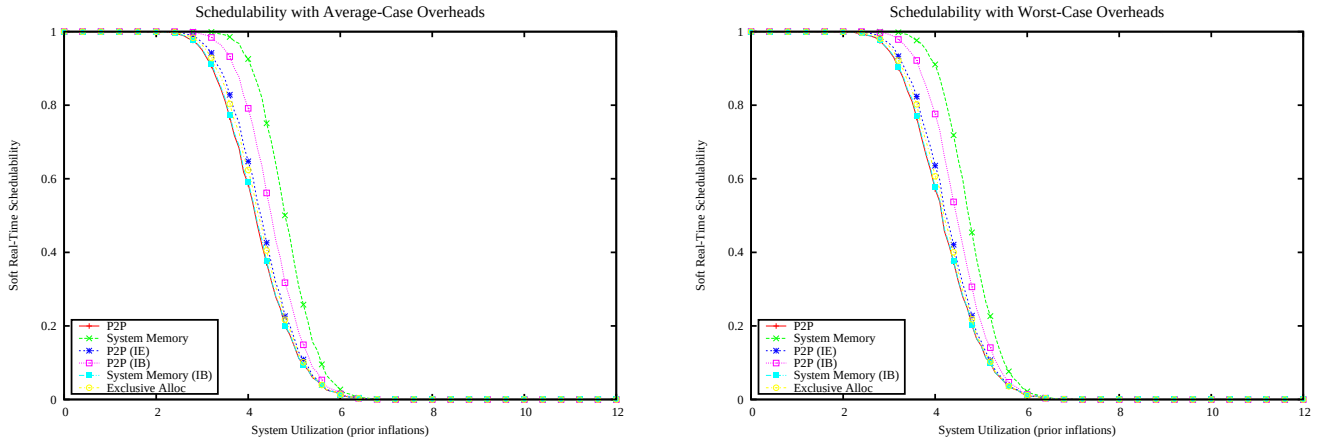

Figure 2736: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

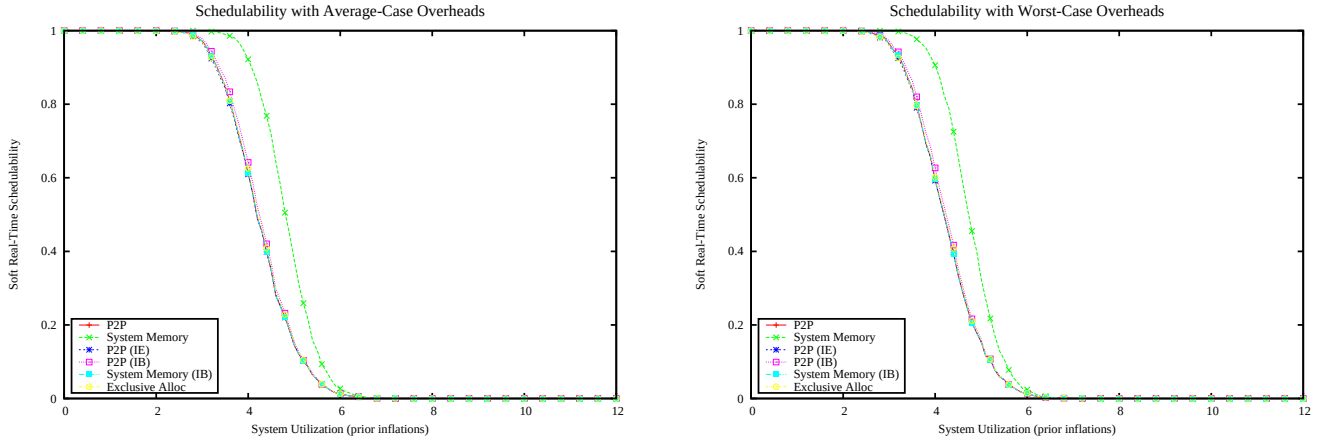

Figure 2737: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

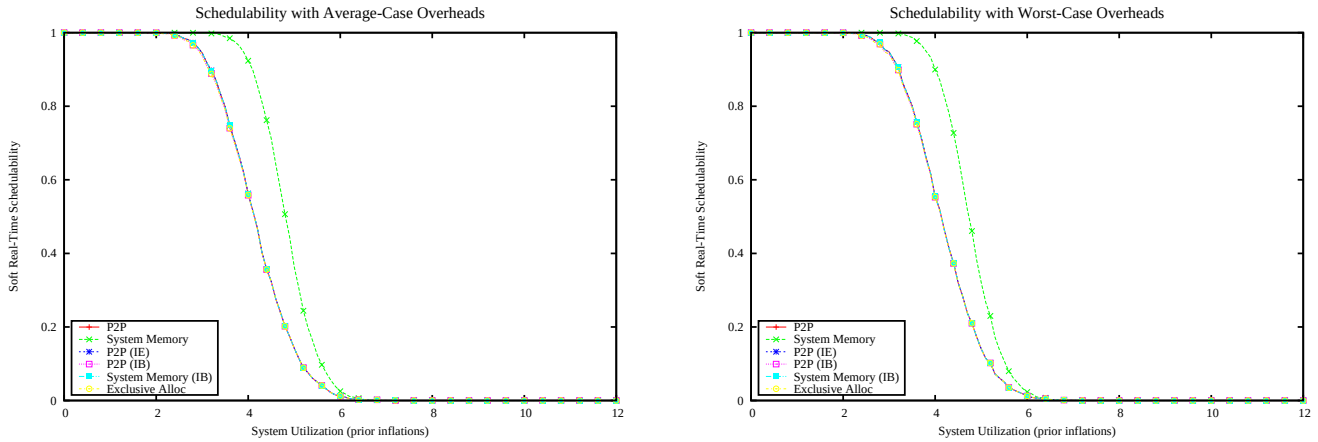

Figure 2738: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

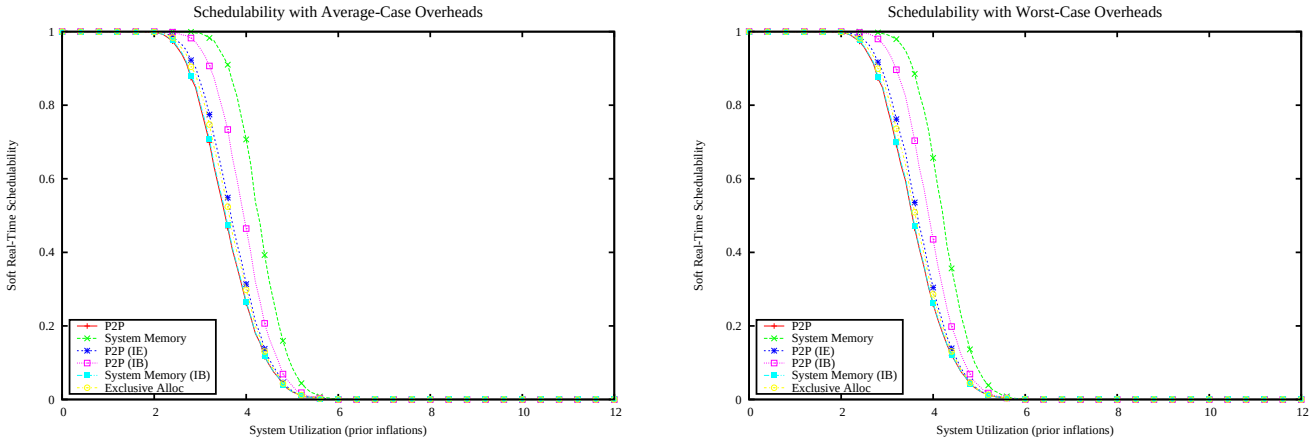

Figure 2739: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

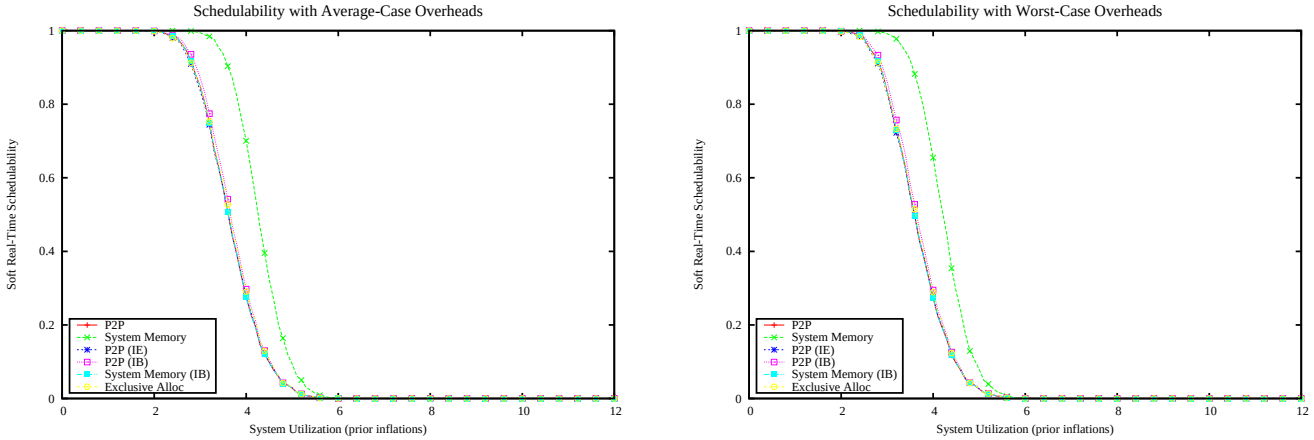

Figure 2740: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

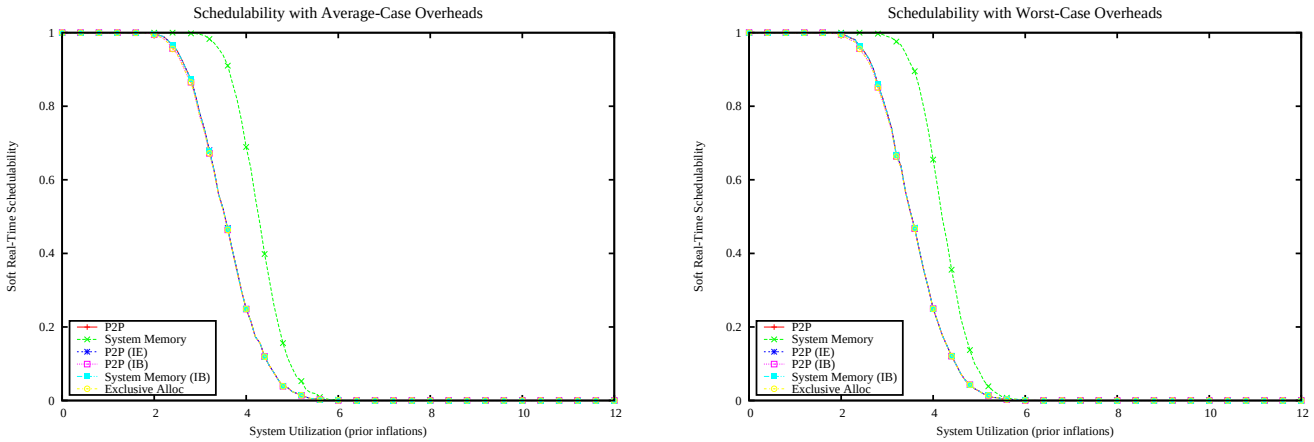

Figure 2741: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

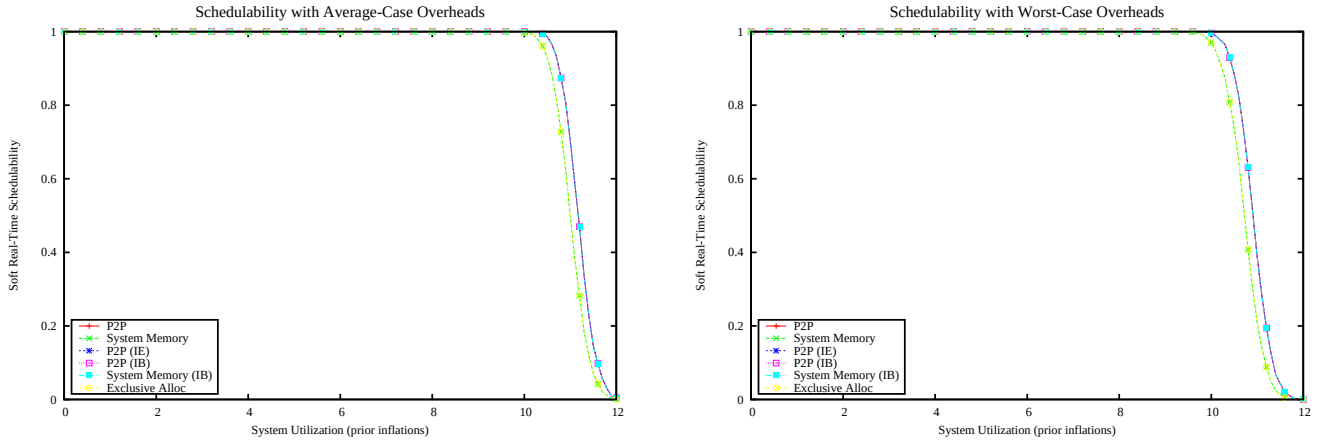

Figure 2742: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

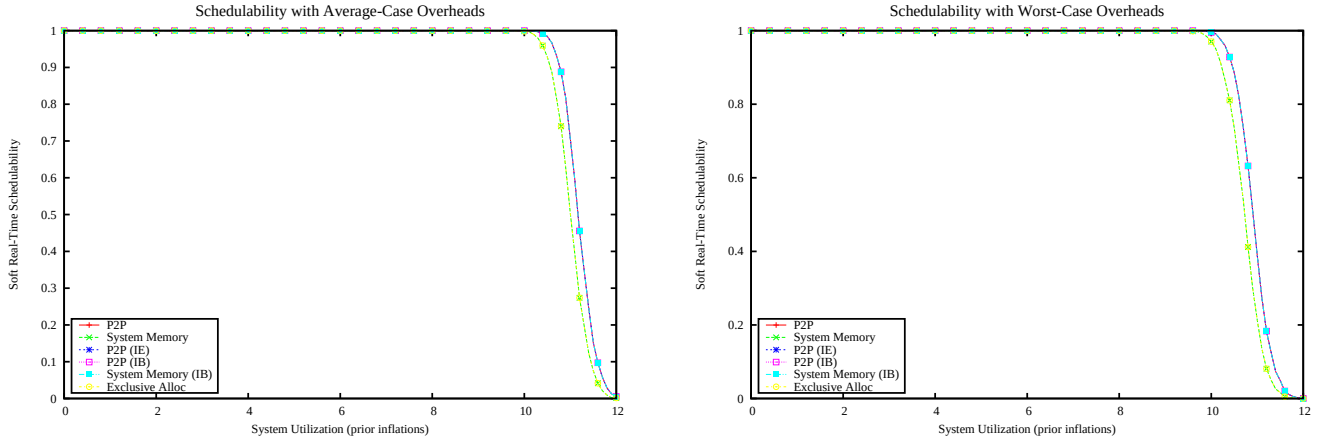

Figure 2743: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

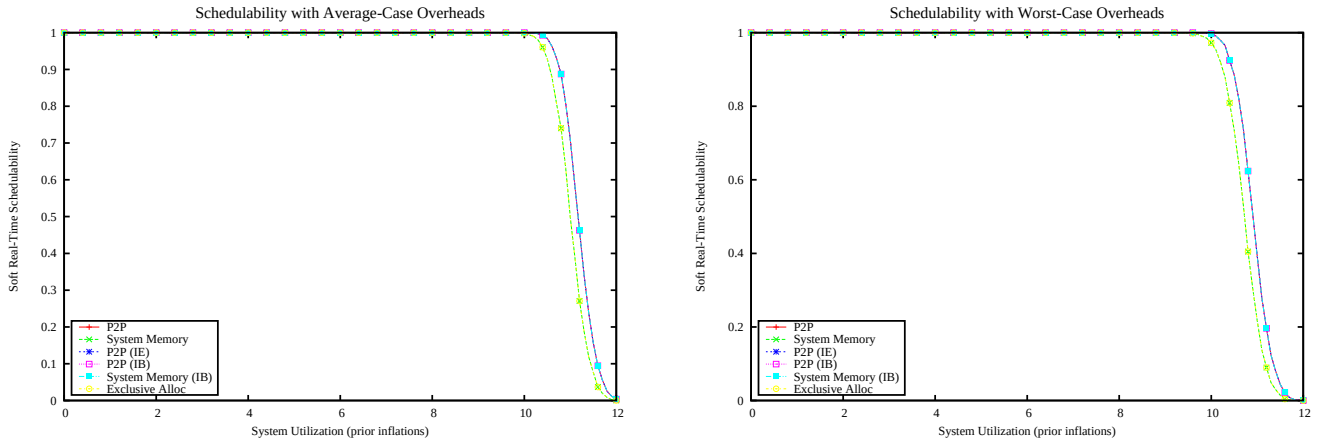

Figure 2744: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

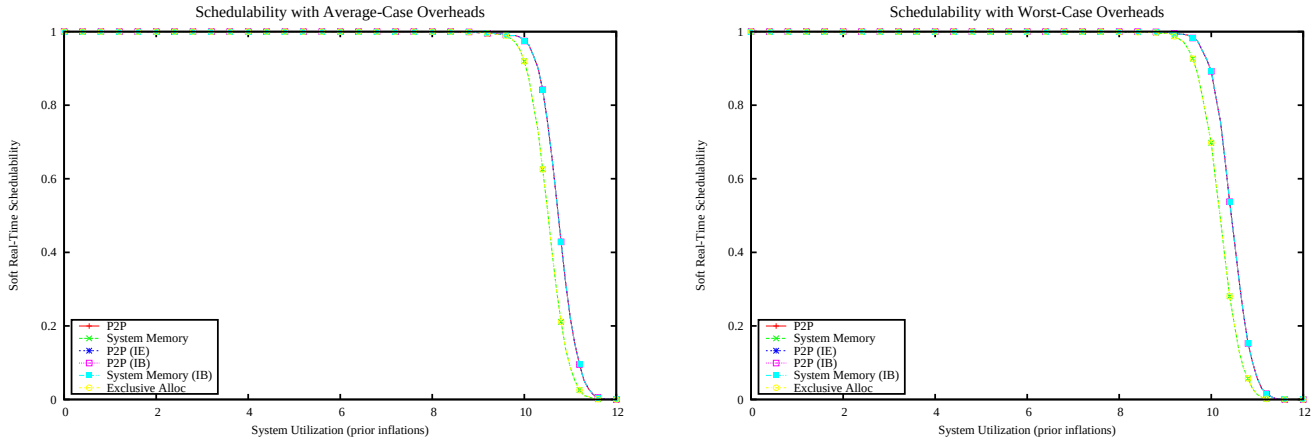

Figure 2745: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

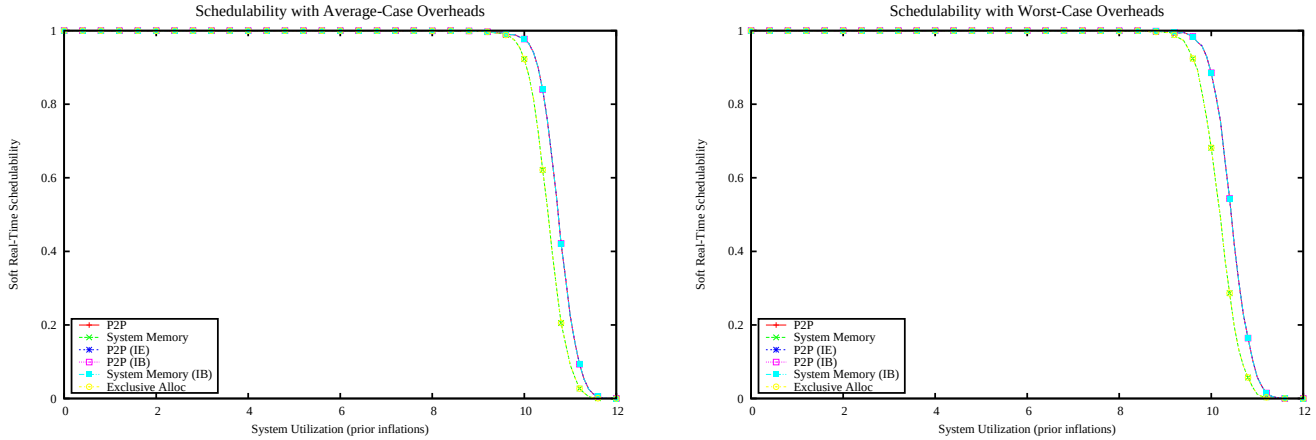

Figure 2746: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

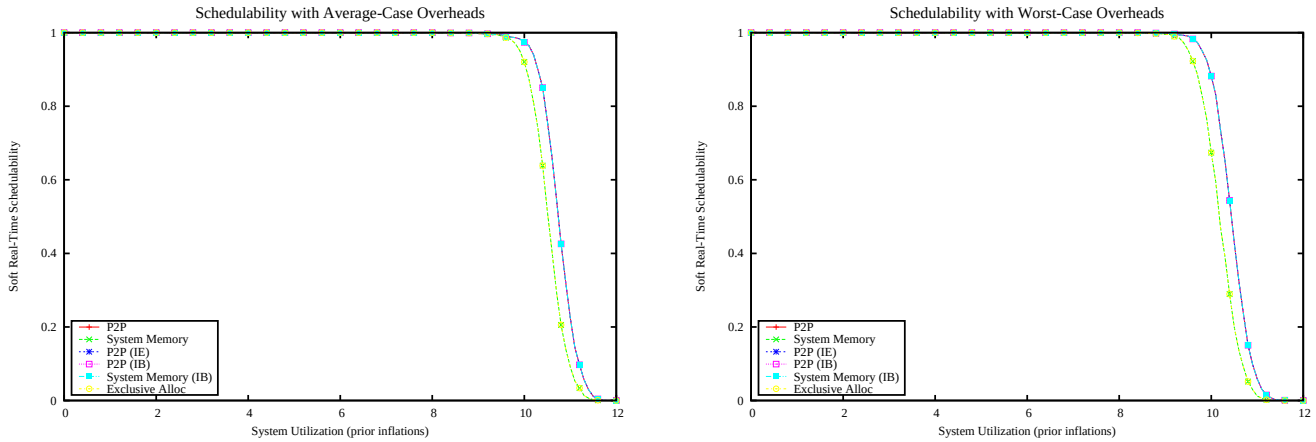

Figure 2747: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

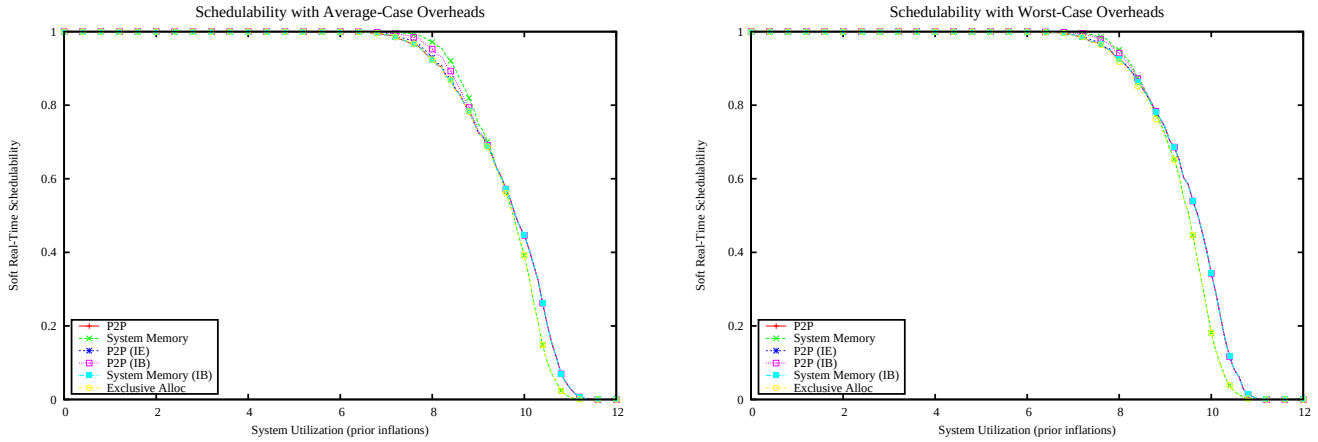

Figure 2748: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

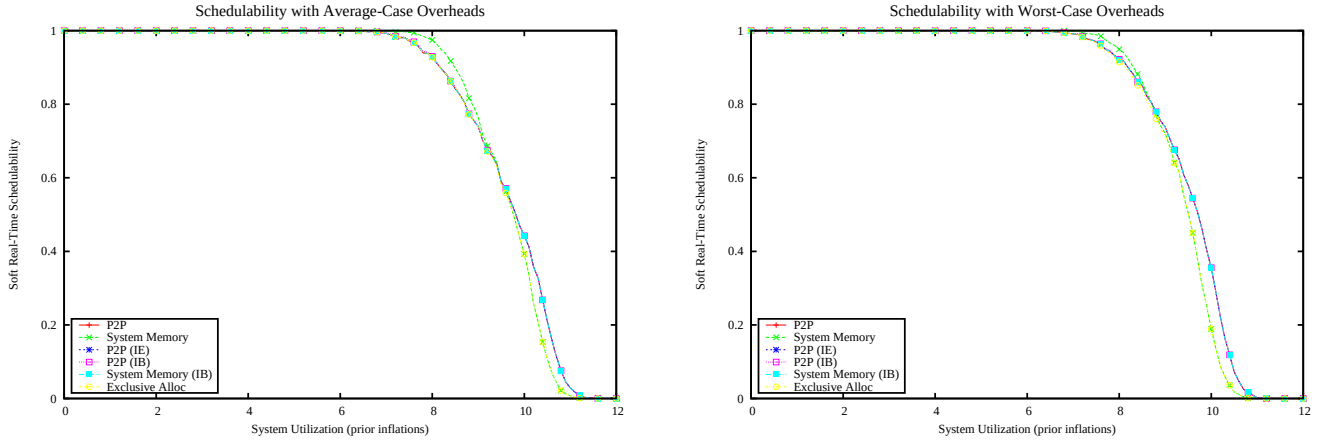

Figure 2749: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

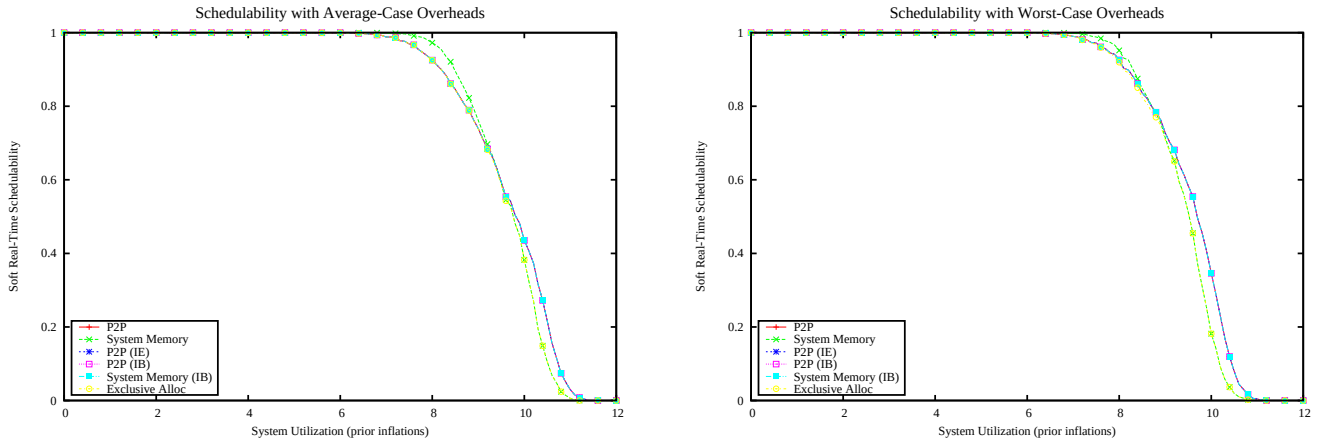

Figure 2750: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

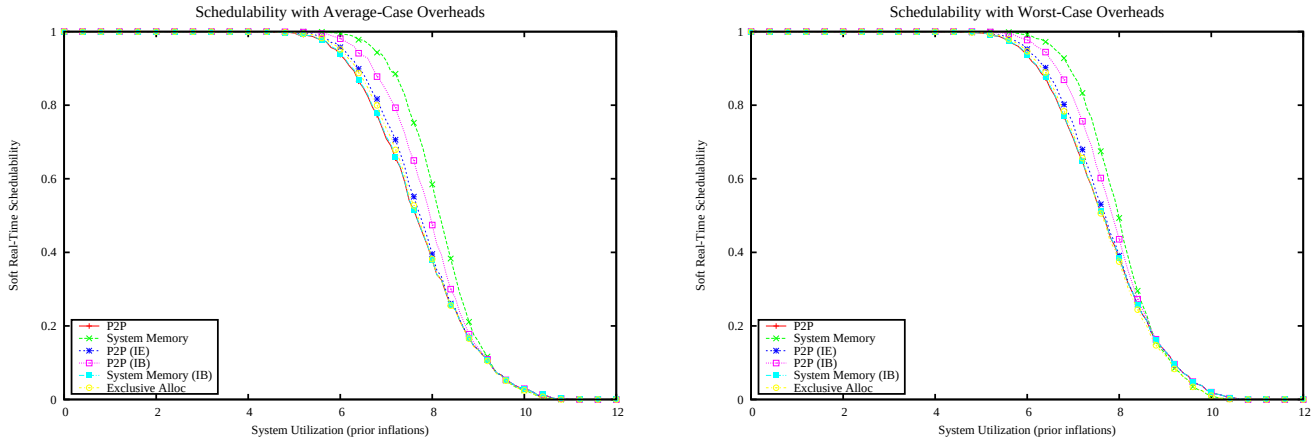

Figure 2751: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

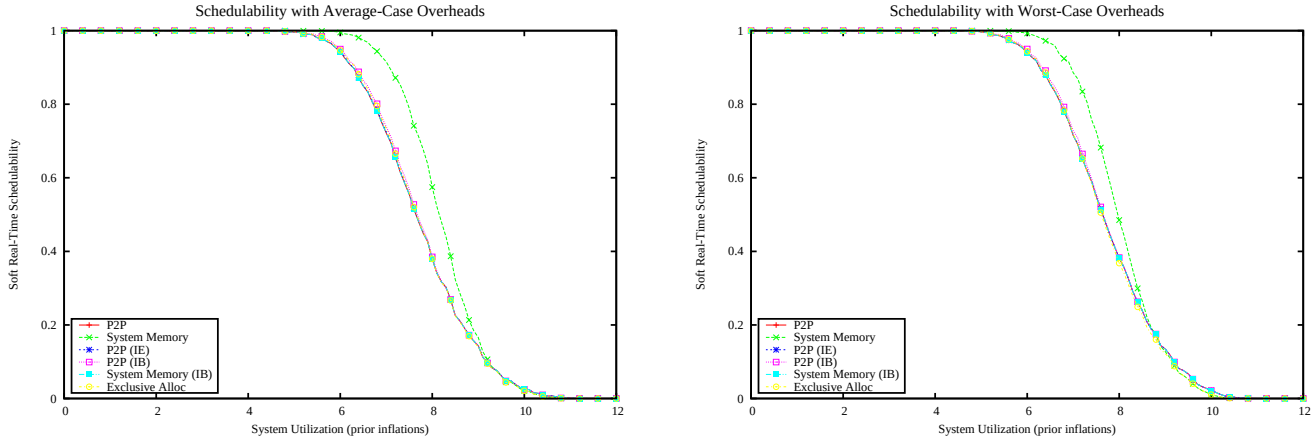

Figure 2752: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

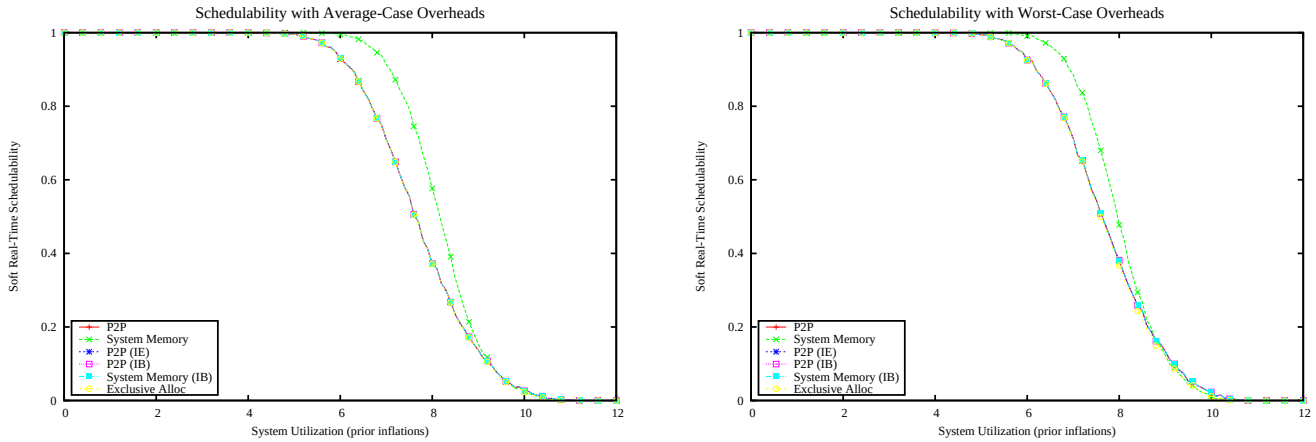

Figure 2753: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

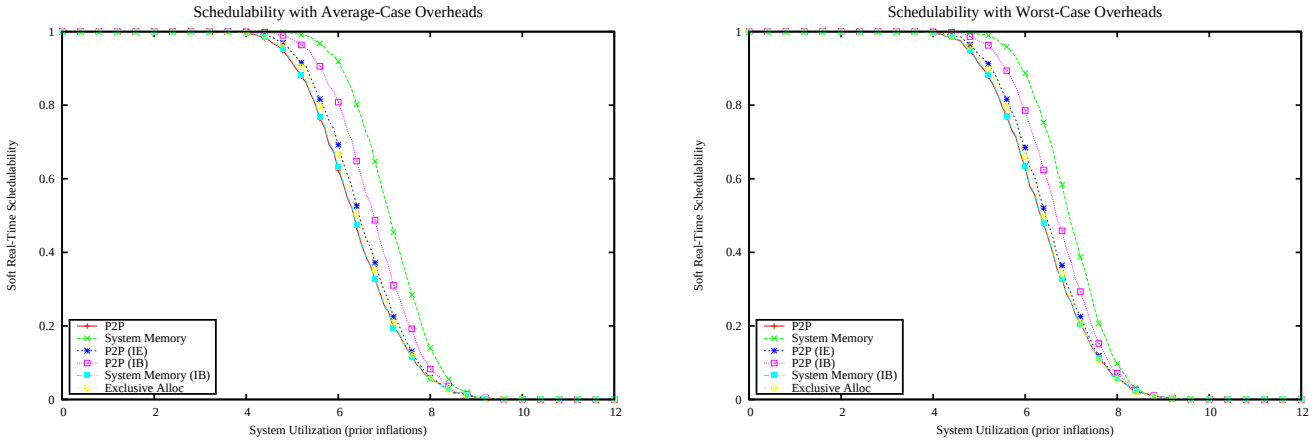

Figure 2754: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

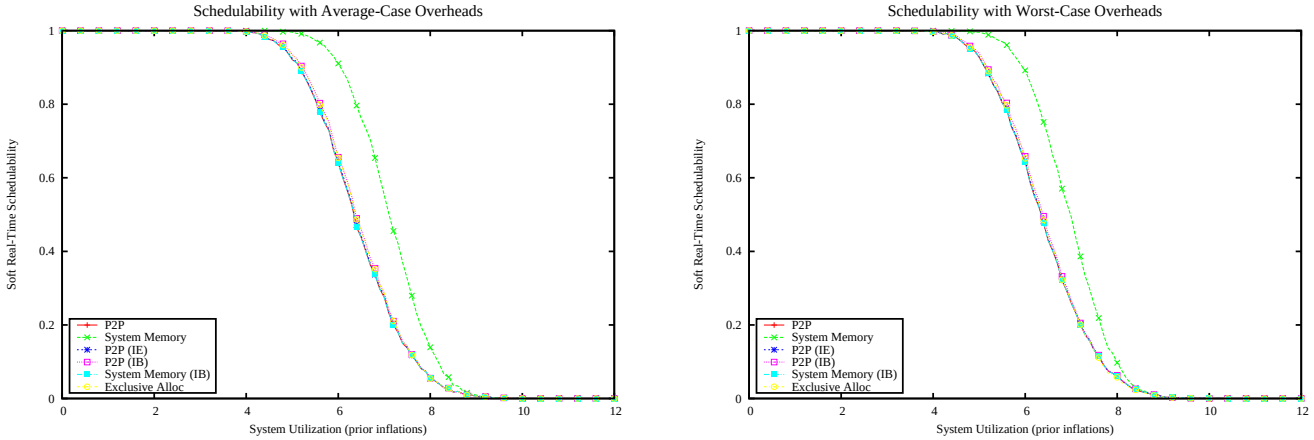

Figure 2755: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

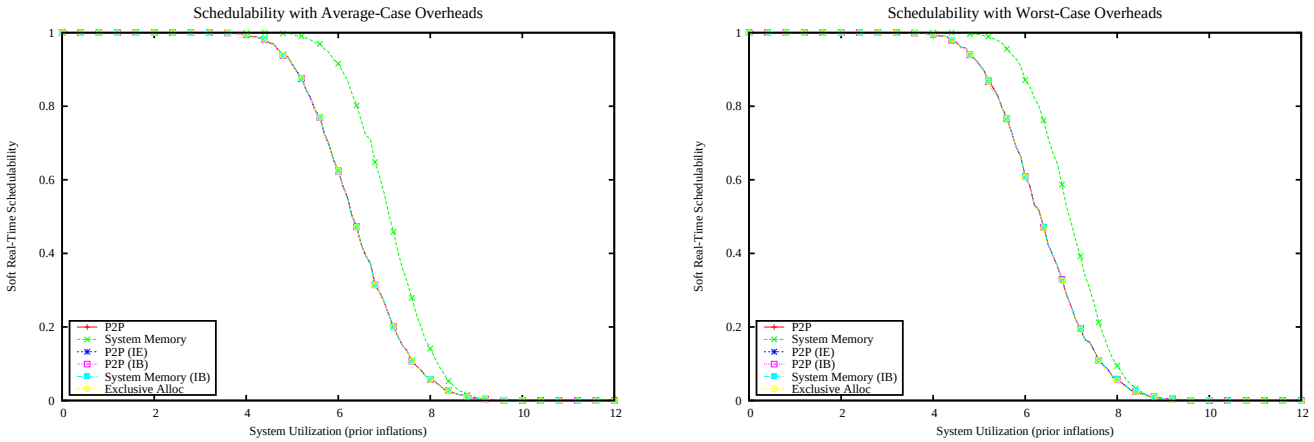

Figure 2756: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

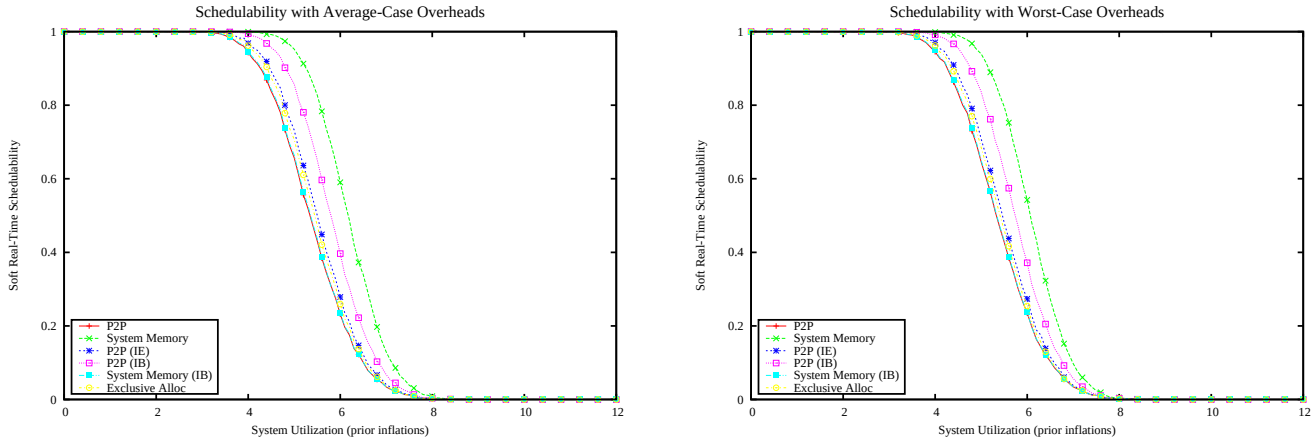

Figure 2757: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

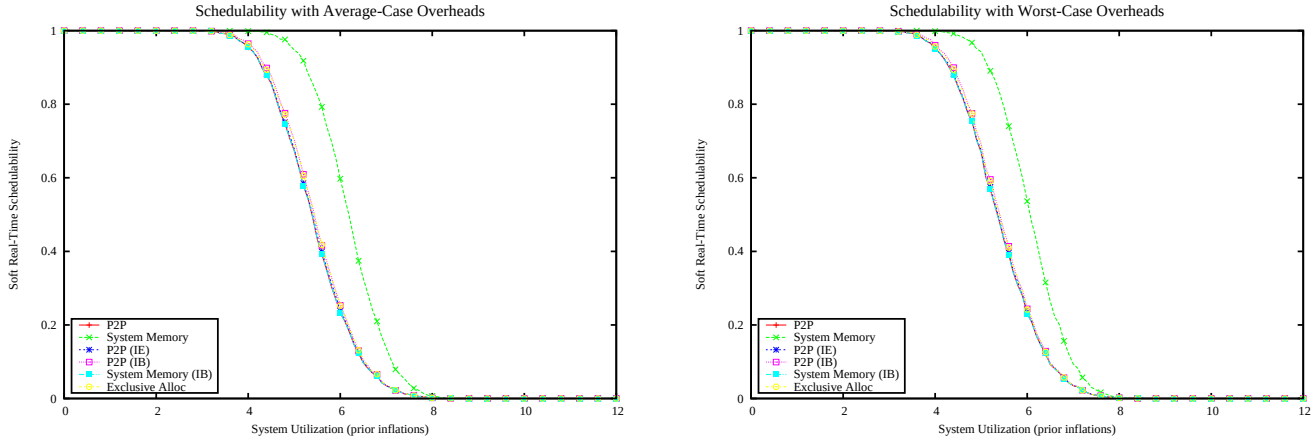

Figure 2758: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

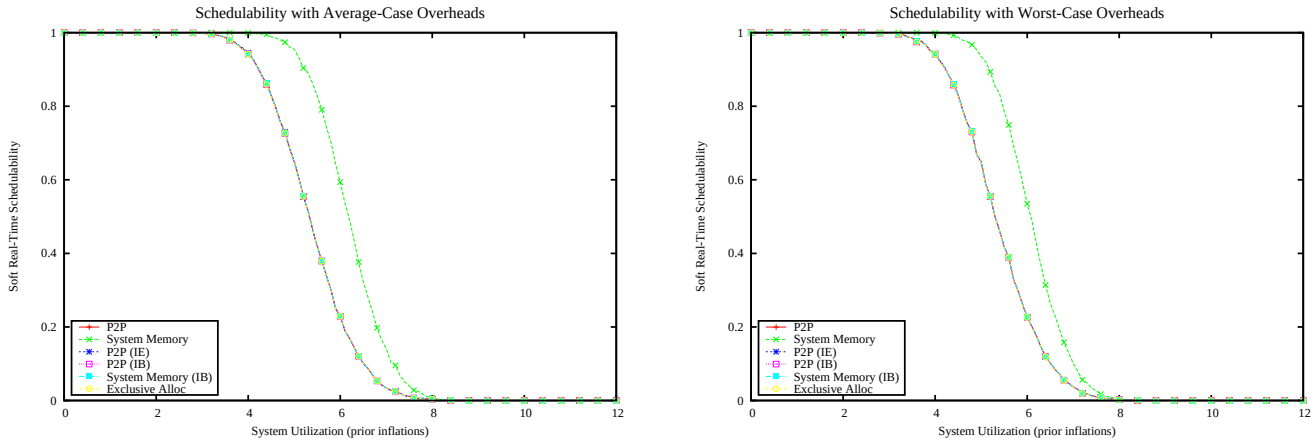

Figure 2759: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

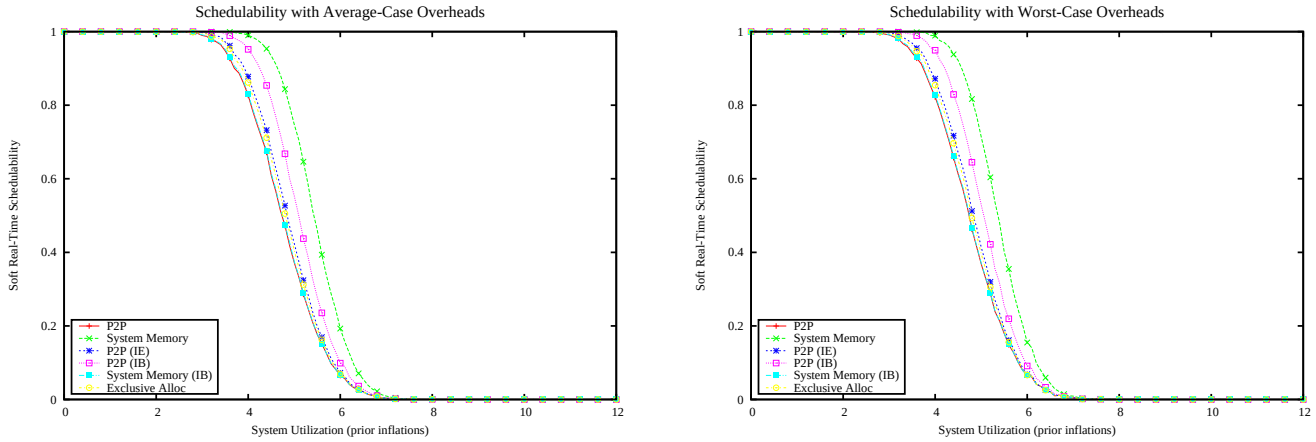

Figure 2760: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

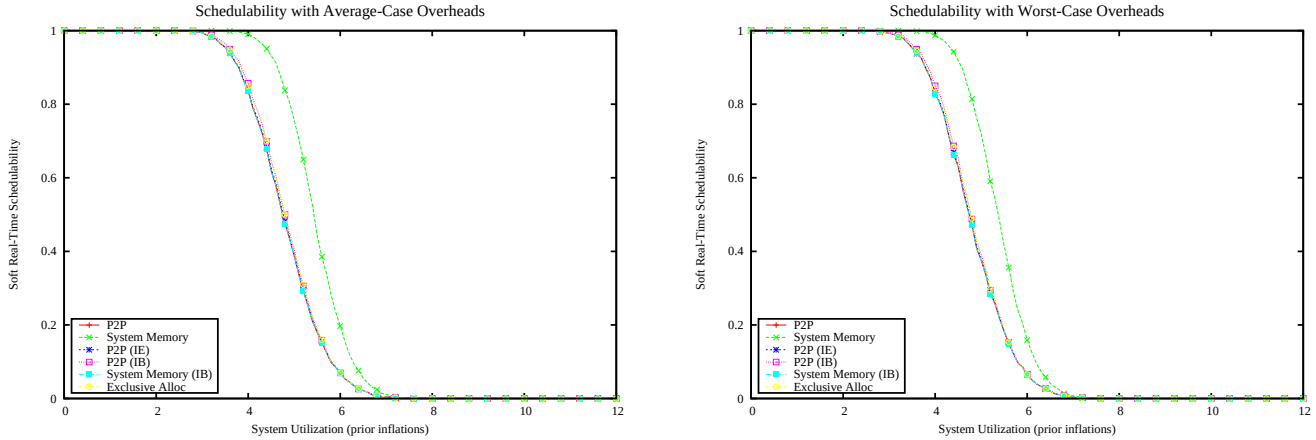

Figure 2761: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

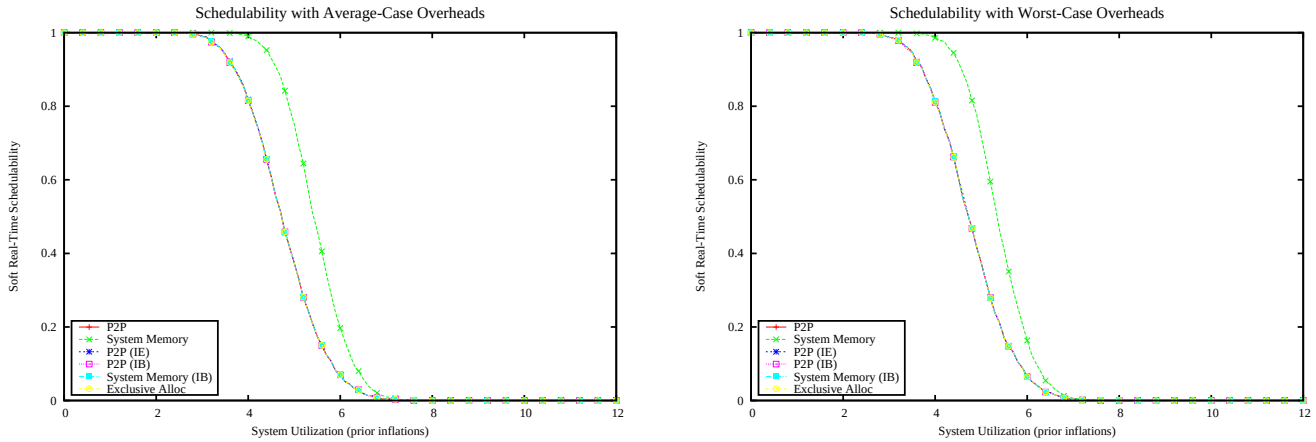

Figure 2762: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

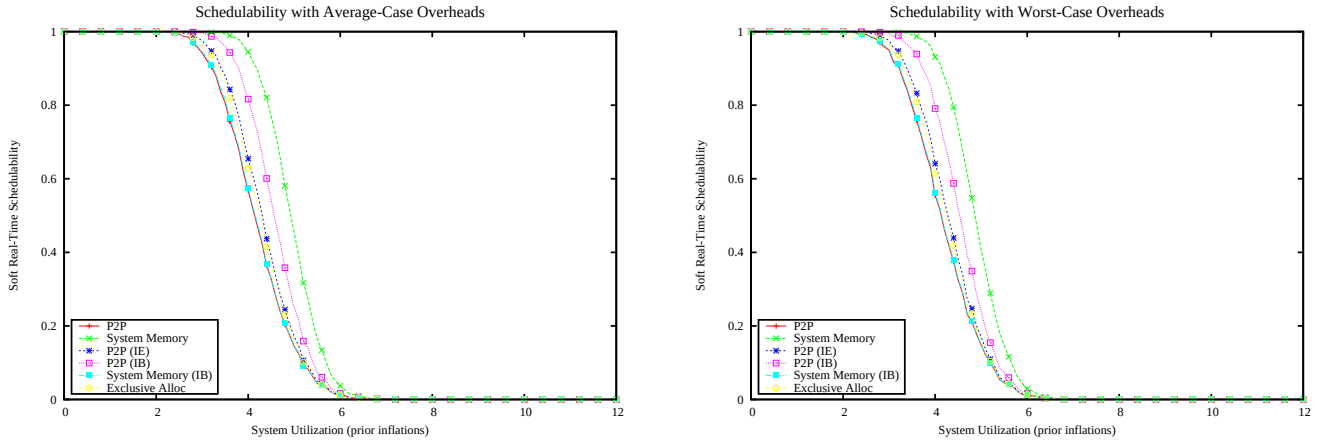

Figure 2763: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

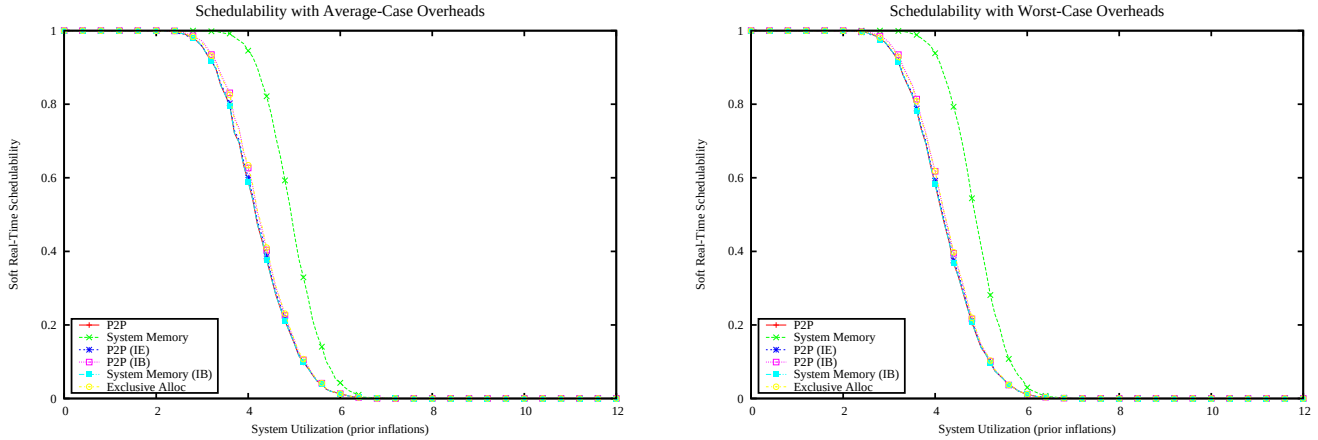

Figure 2764: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

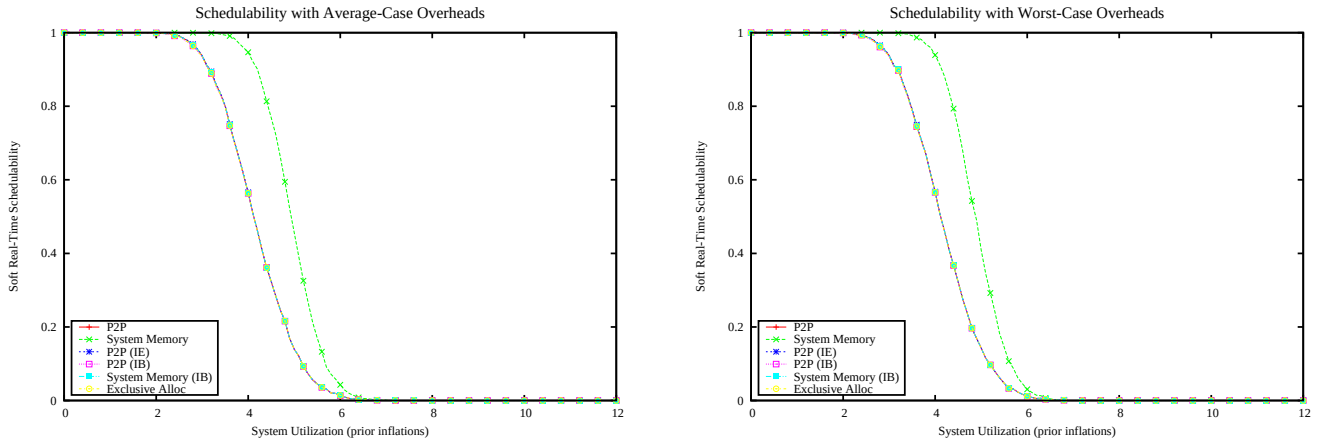

Figure 2765: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

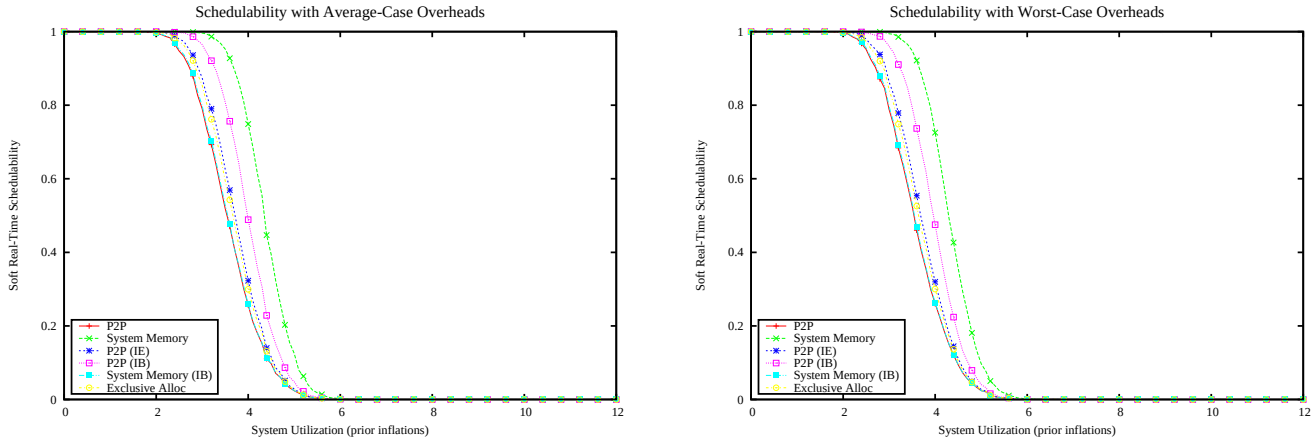

Figure 2766: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

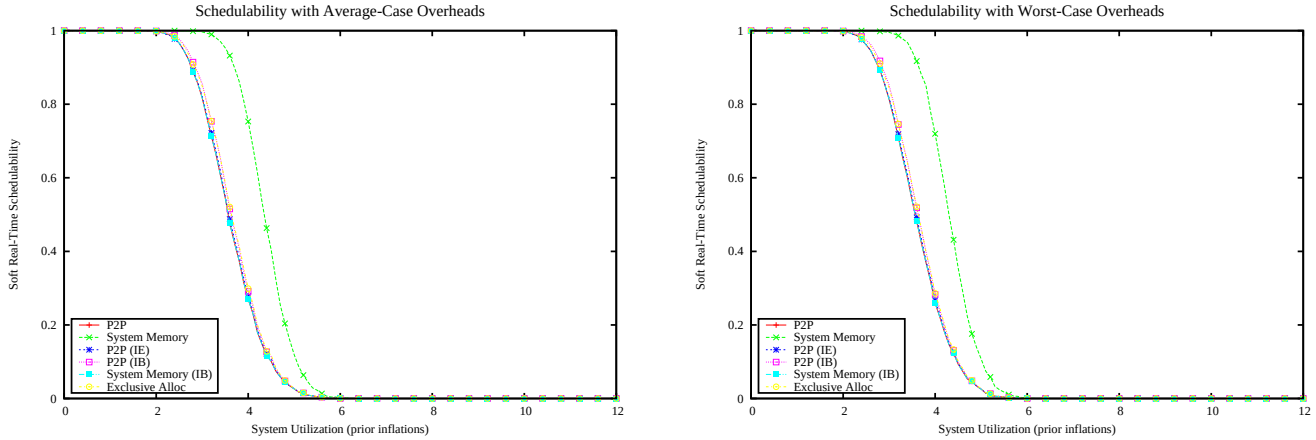

Figure 2767: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

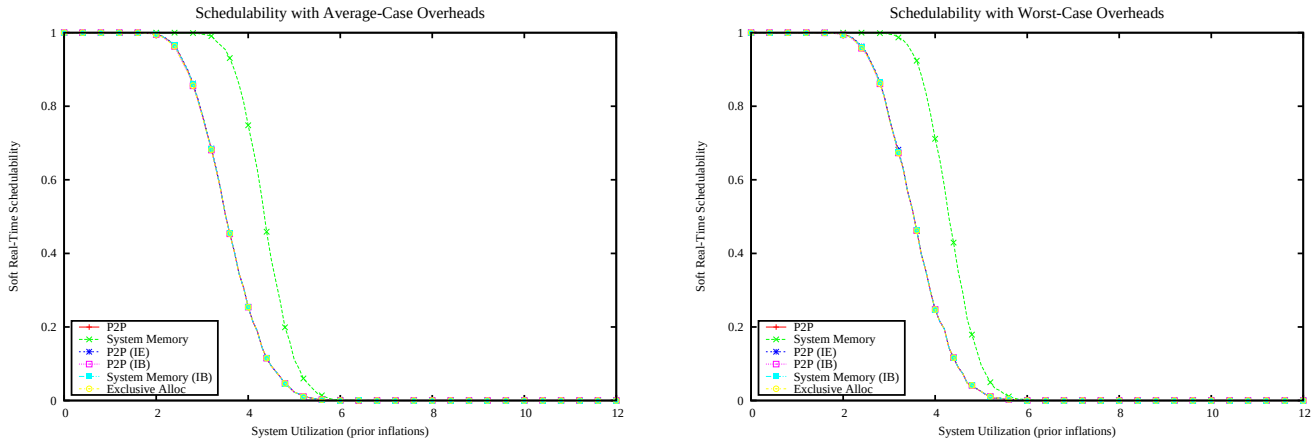

Figure 2768: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

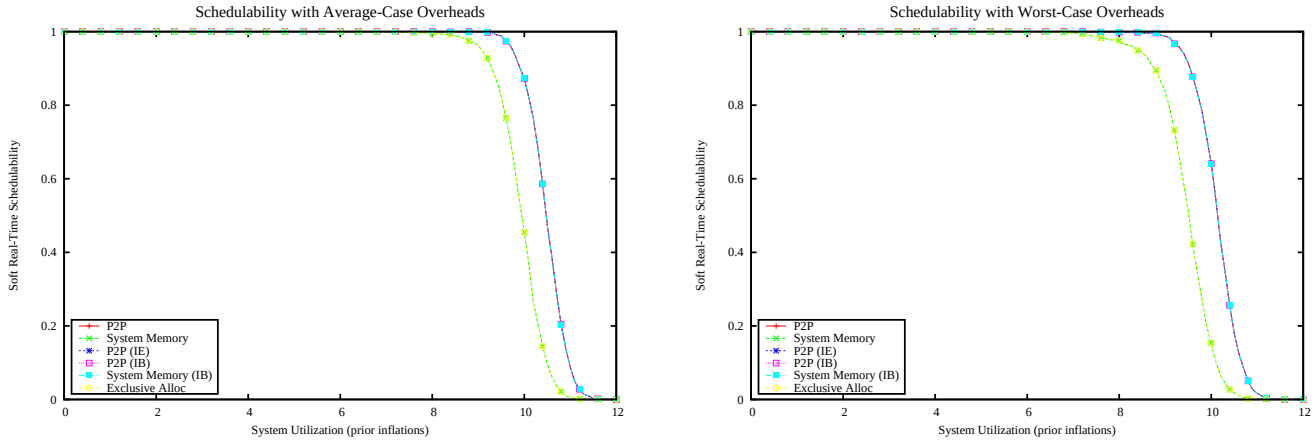

Figure 2769: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

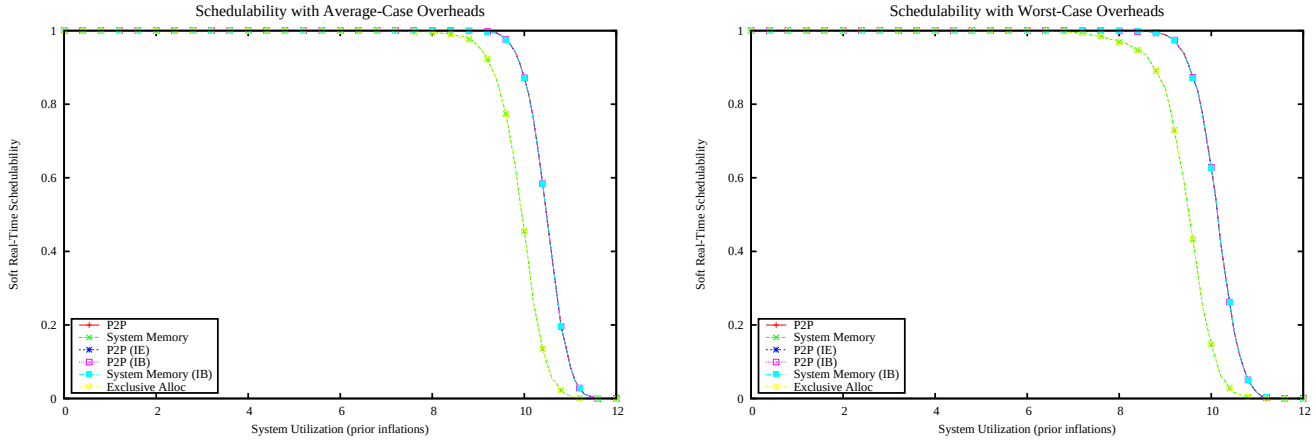

Figure 2770: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

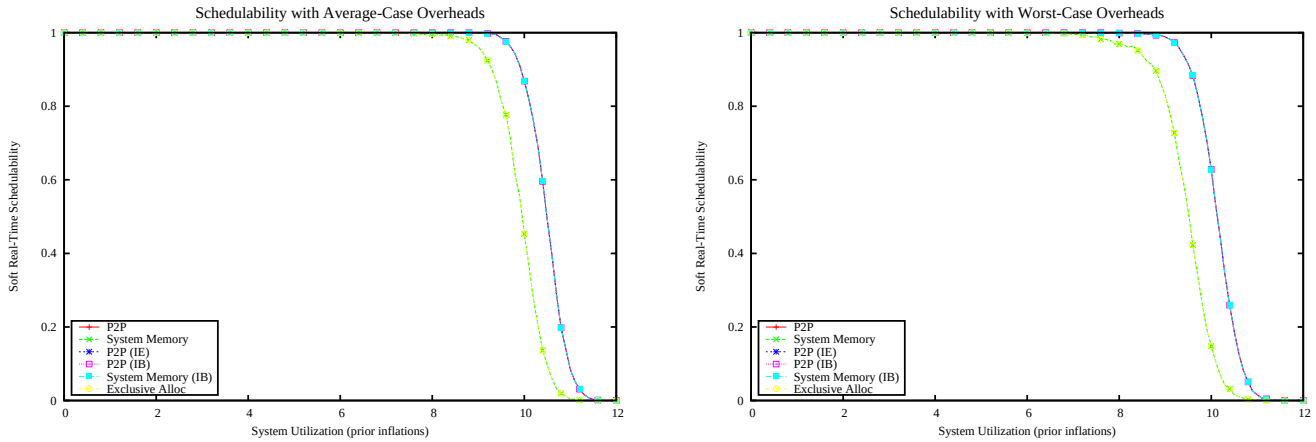

Figure 2771: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

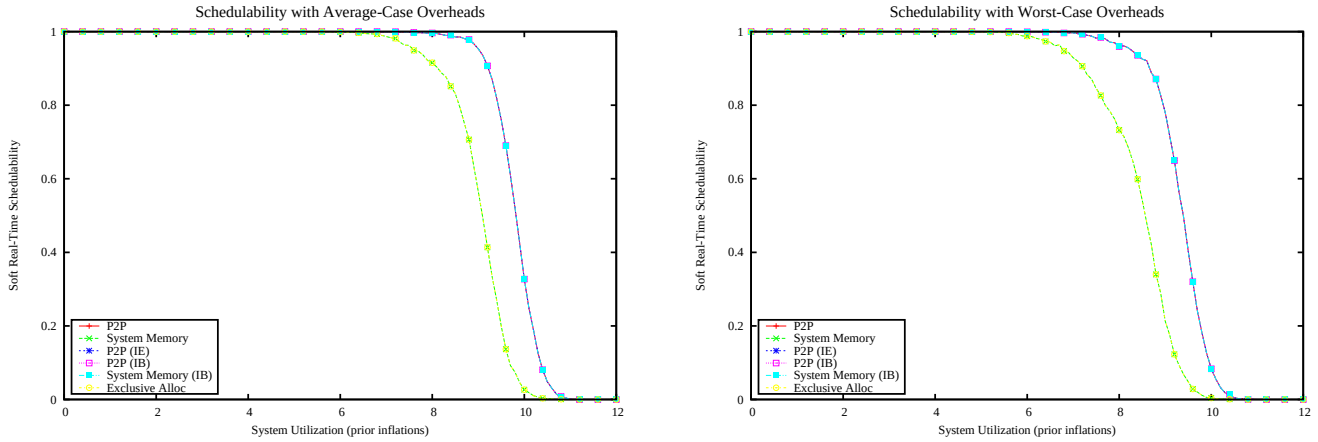

Figure 2772: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

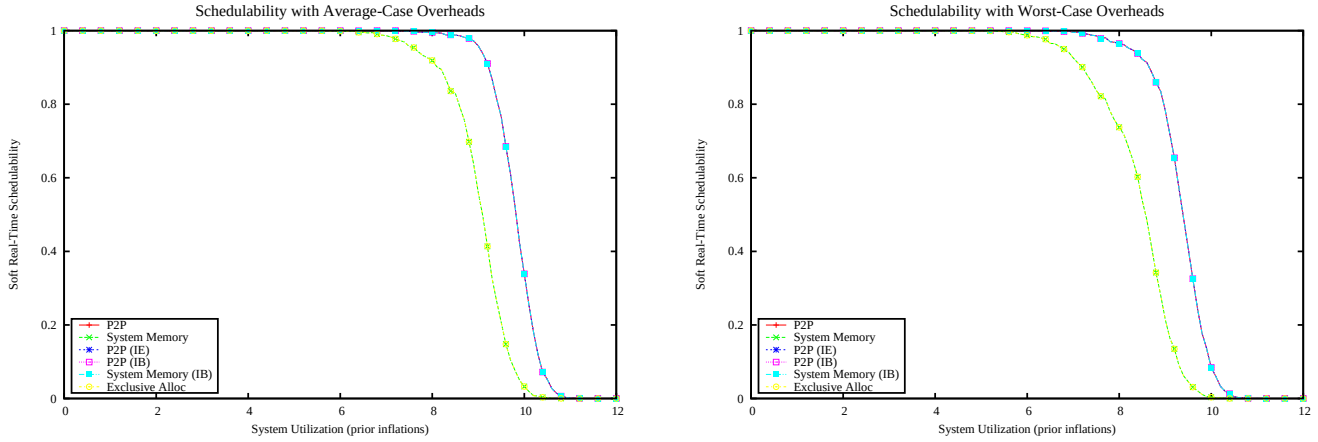

Figure 2773: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

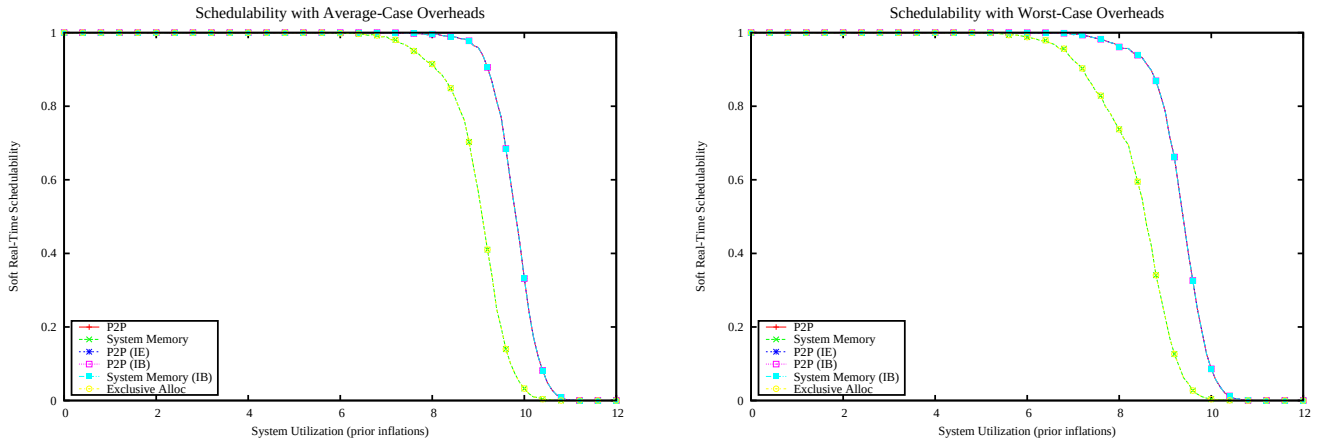

Figure 2774: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

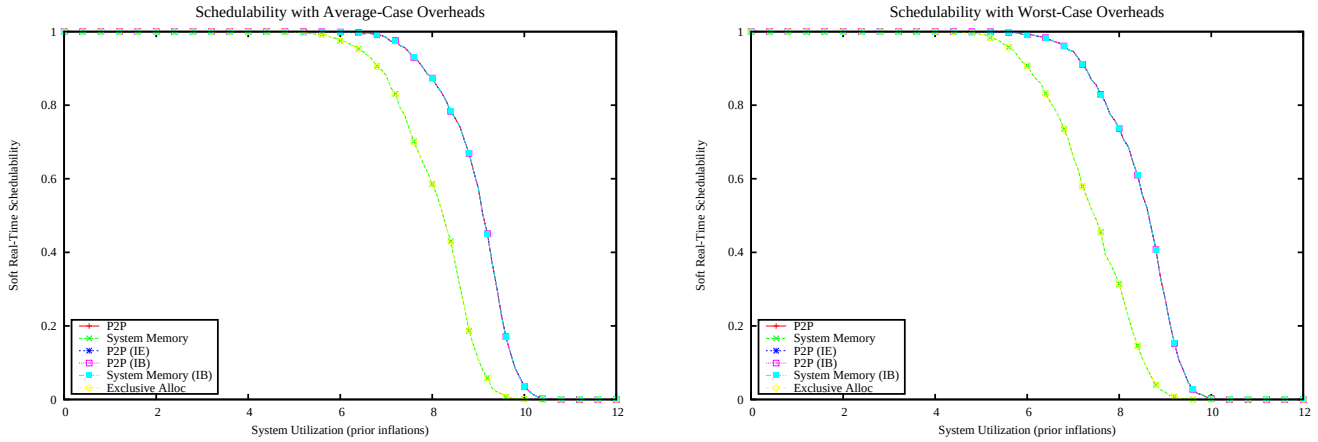

Figure 2775: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

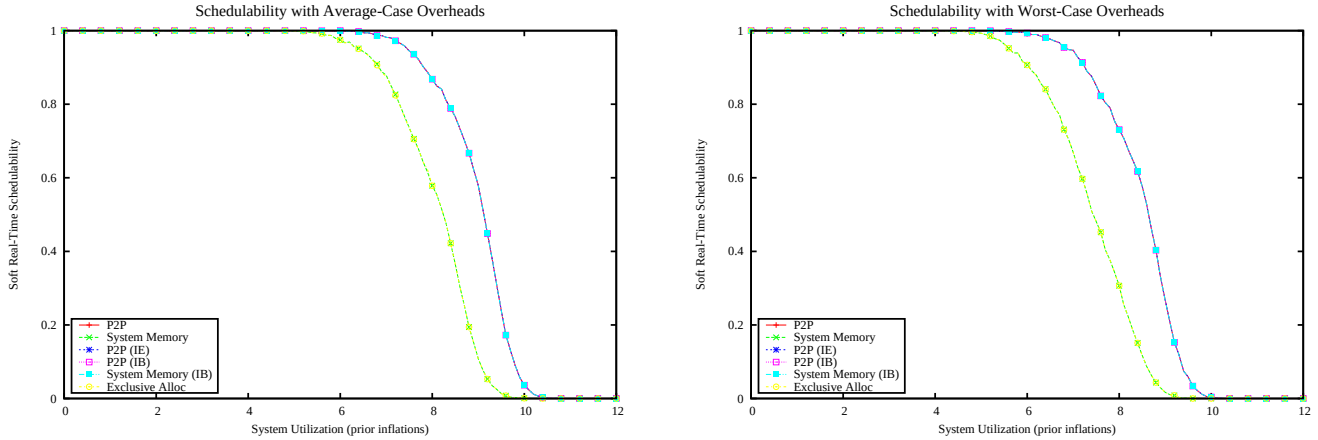

Figure 2776: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

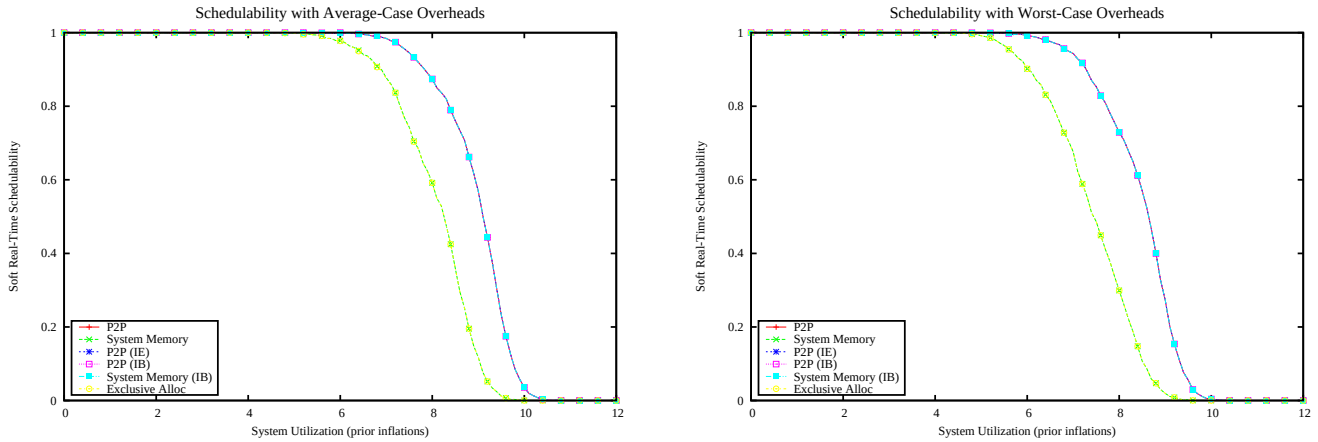

Figure 2777: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

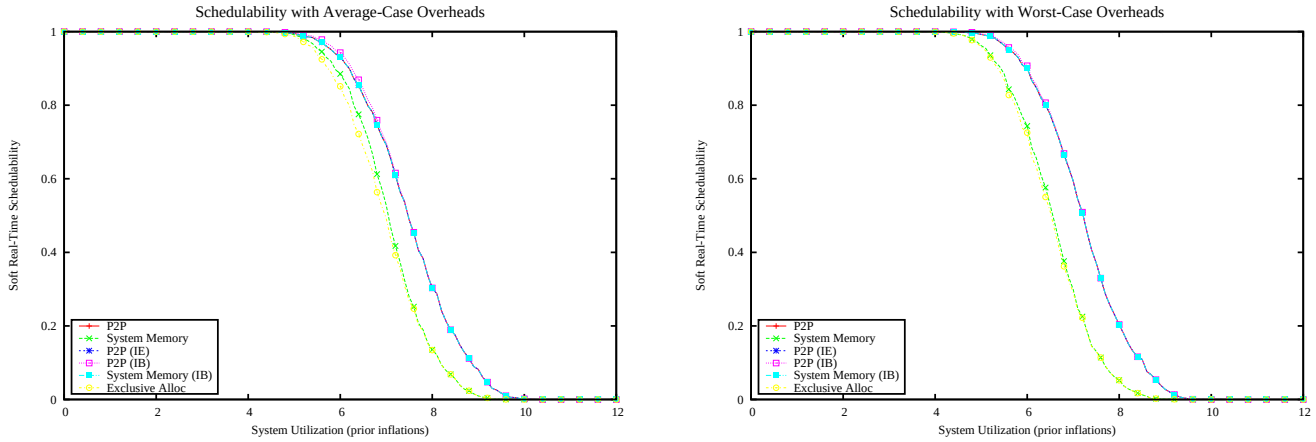

Figure 2778: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

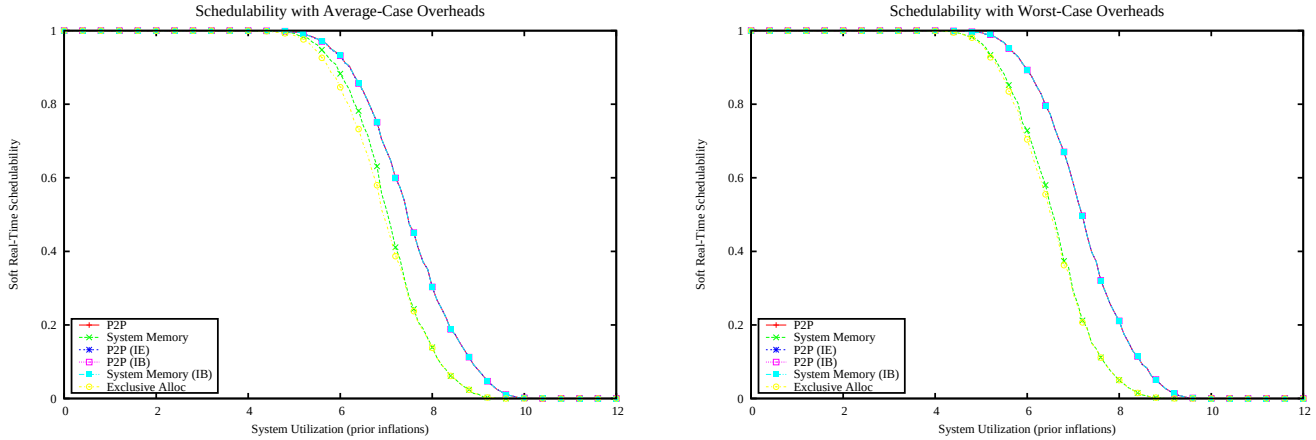

Figure 2779: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

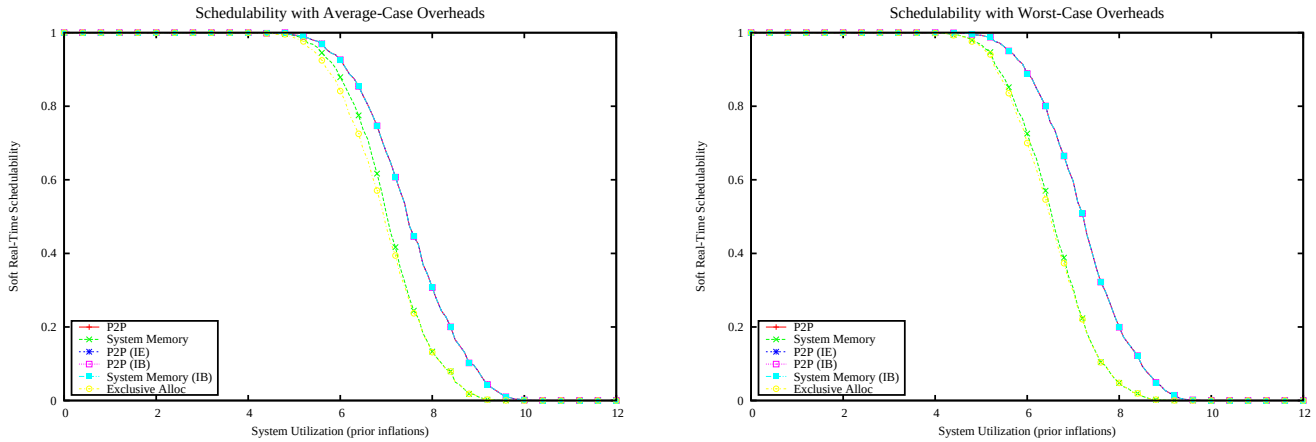

Figure 2780: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

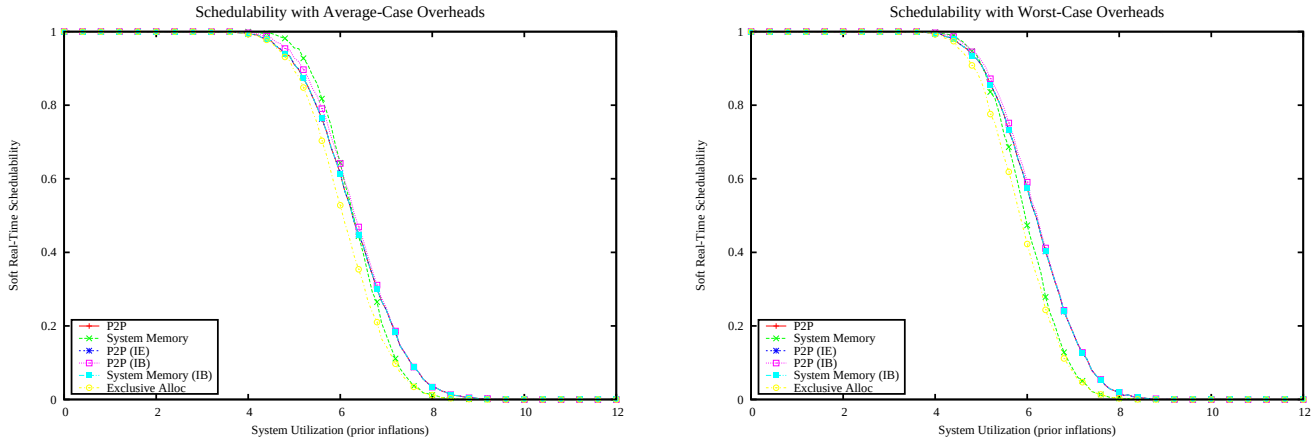

Figure 2781: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

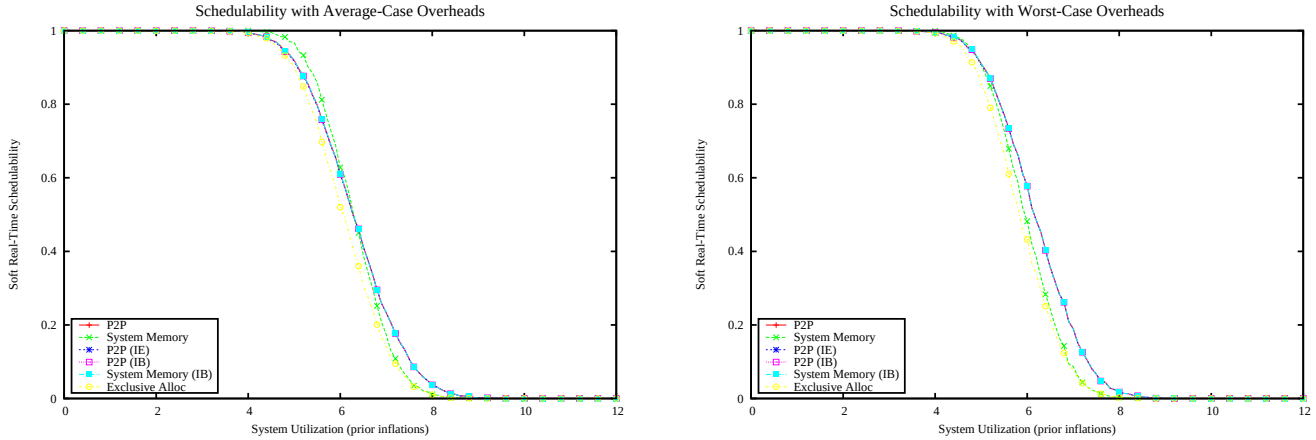

Figure 2782: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

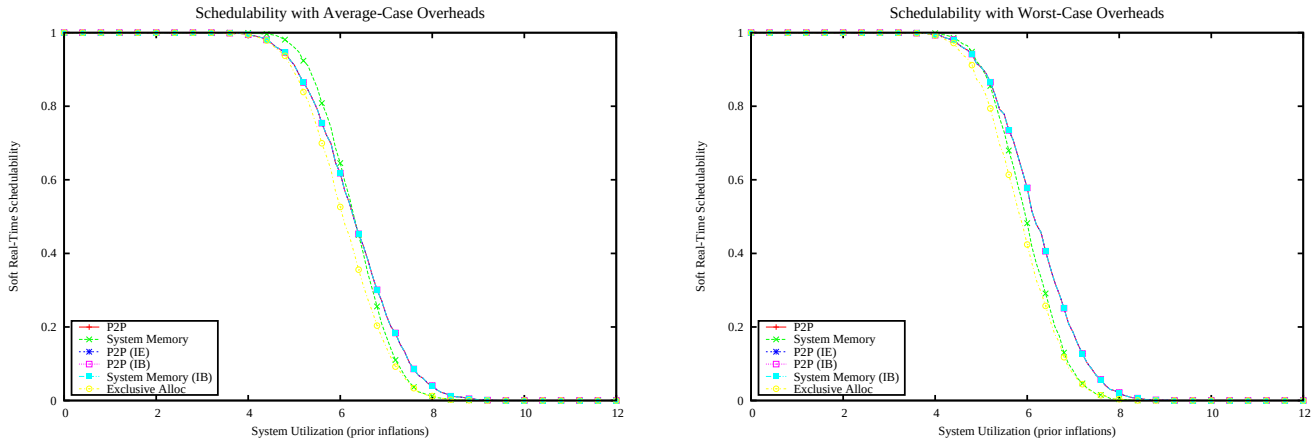

Figure 2783: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

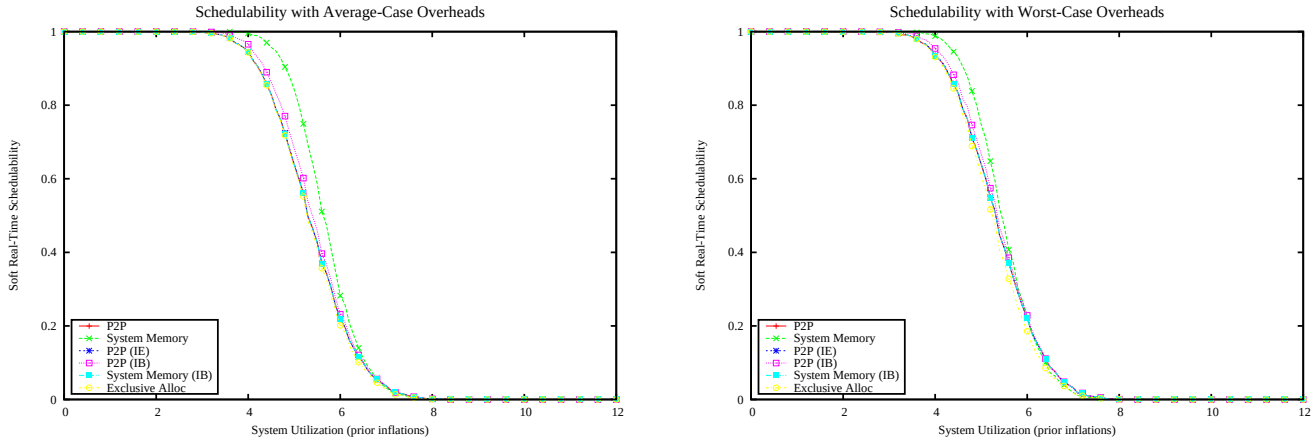

Figure 2784: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

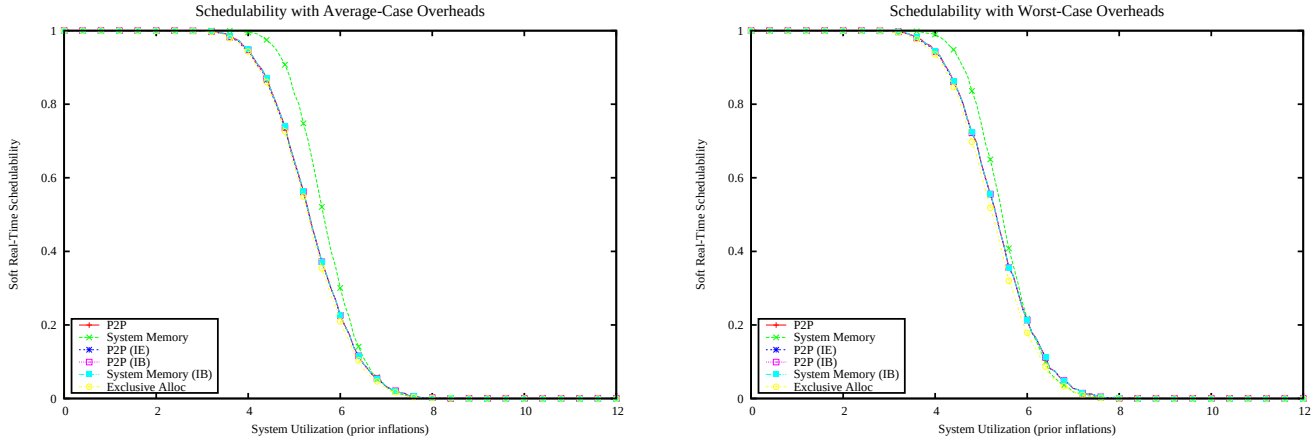

Figure 2785: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

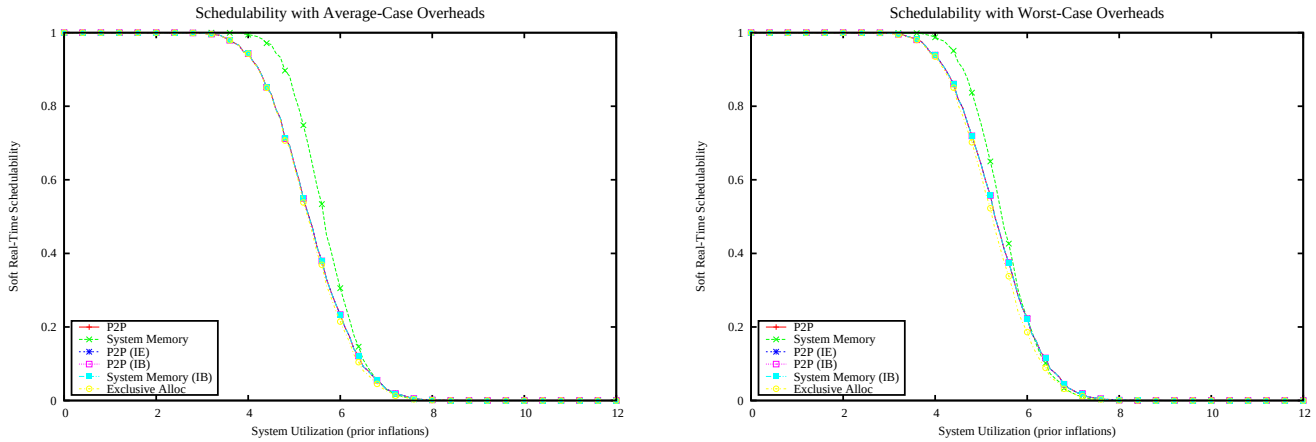

Figure 2786: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

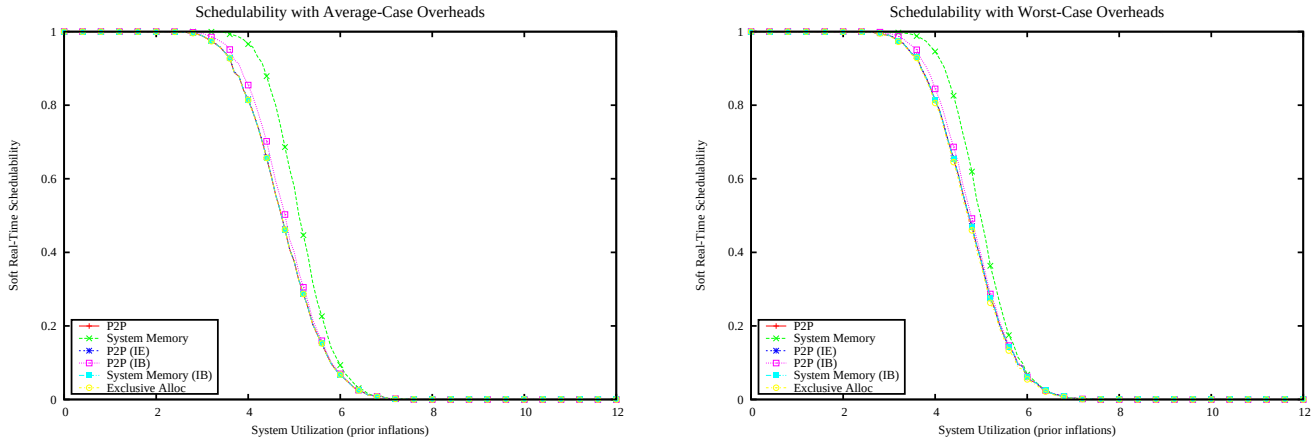

Figure 2787: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

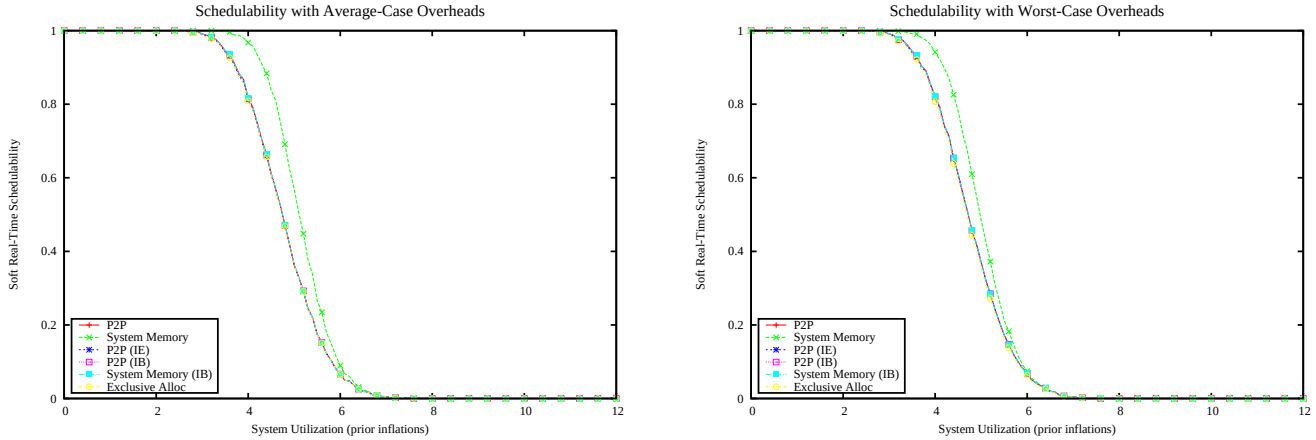

Figure 2788: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

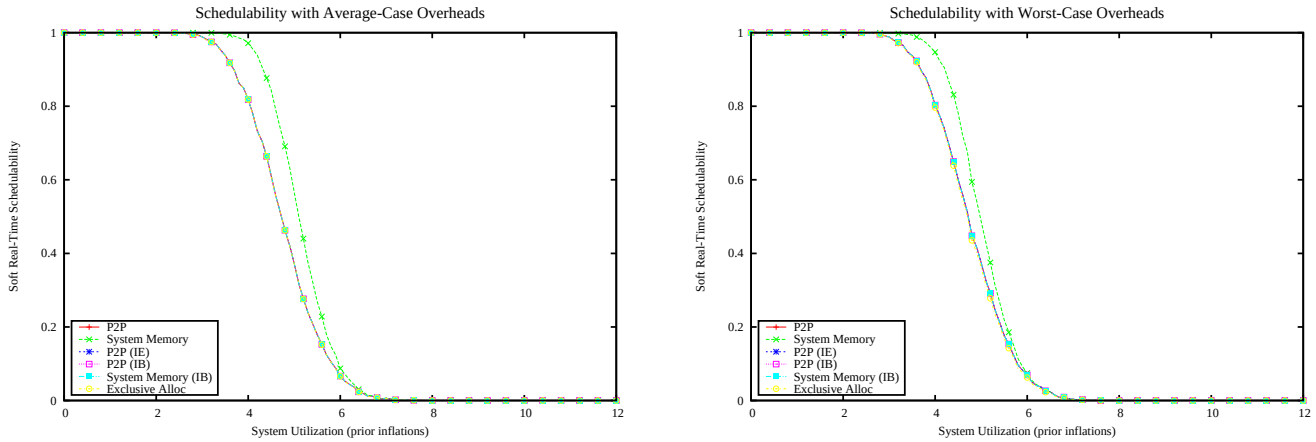

Figure 2789: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

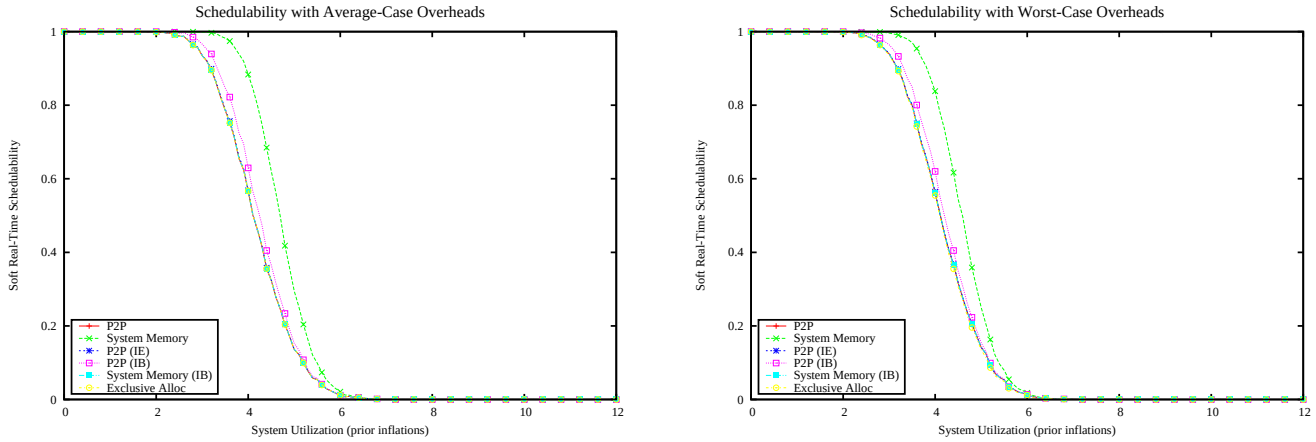

Figure 2790: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

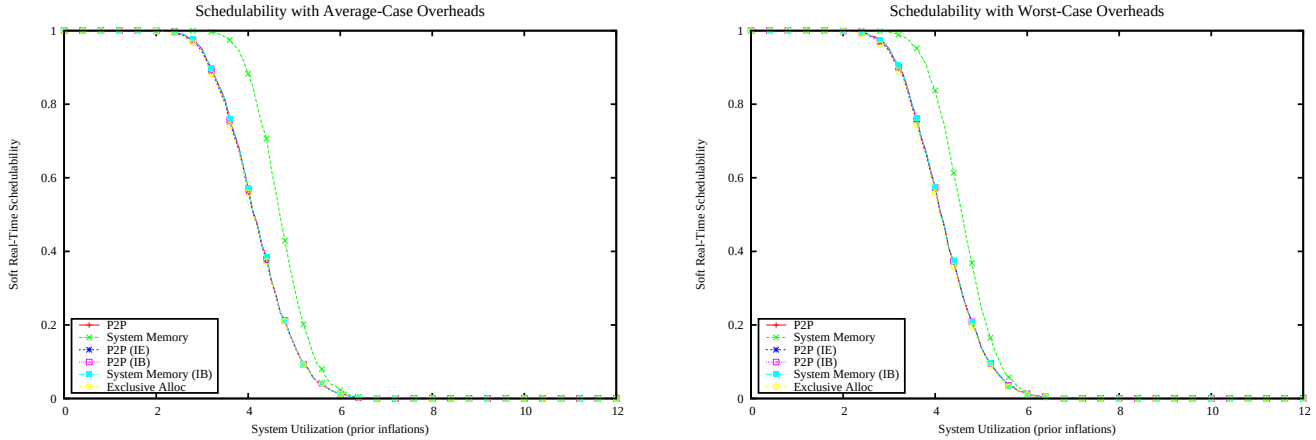

Figure 2791: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

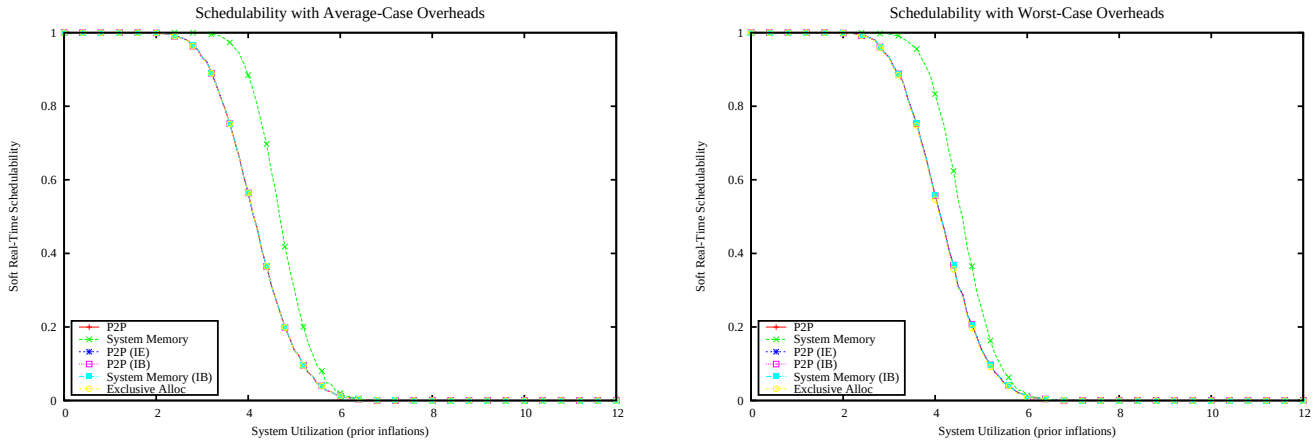

Figure 2792: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

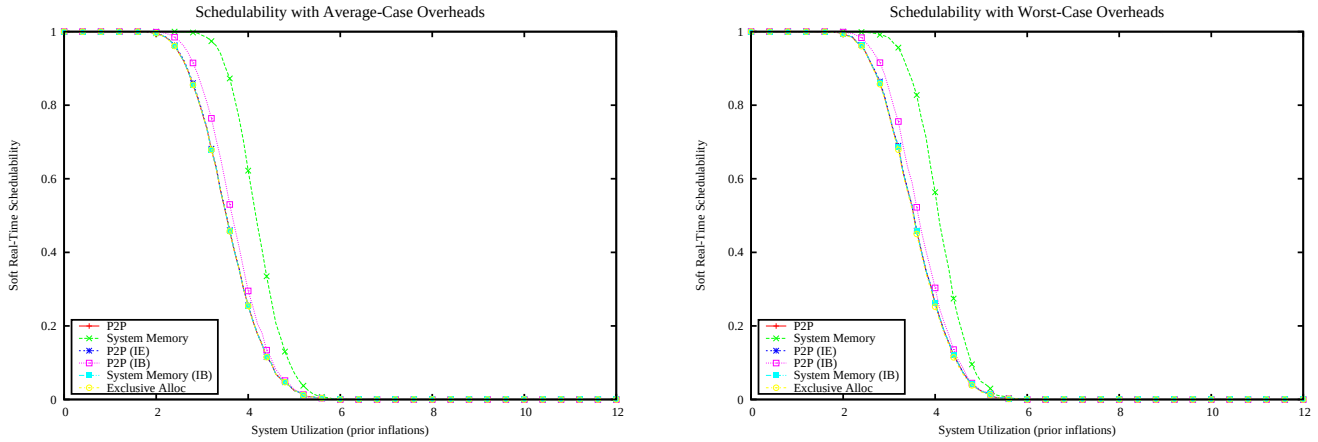

Figure 2793: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

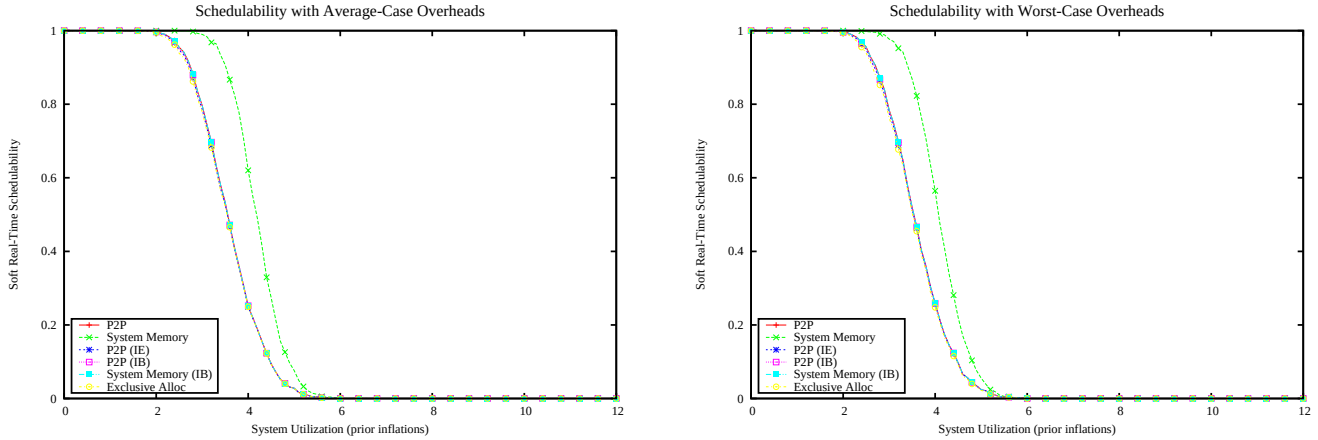

Figure 2794: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

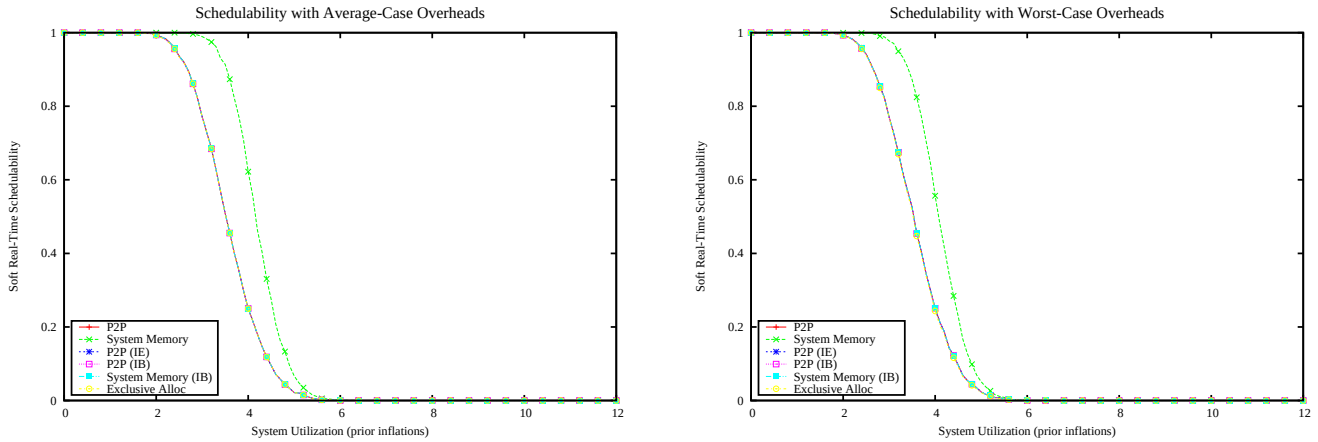

Figure 2795: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

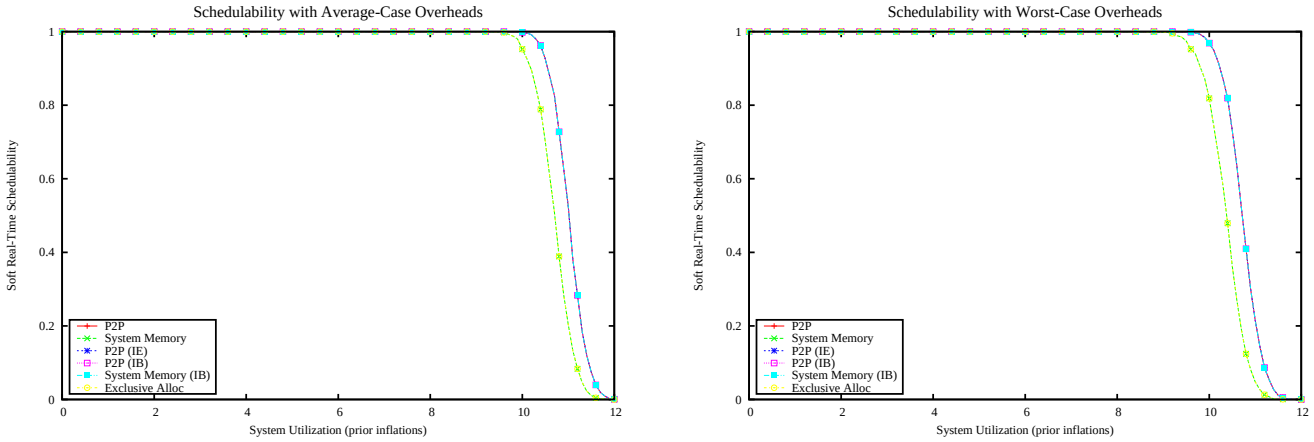

Figure 2796: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

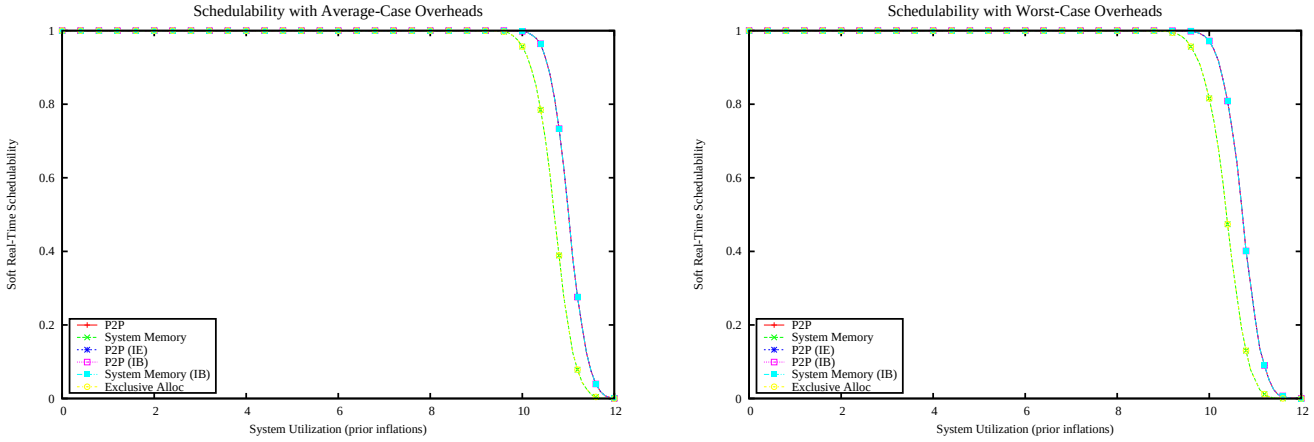

Figure 2797: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

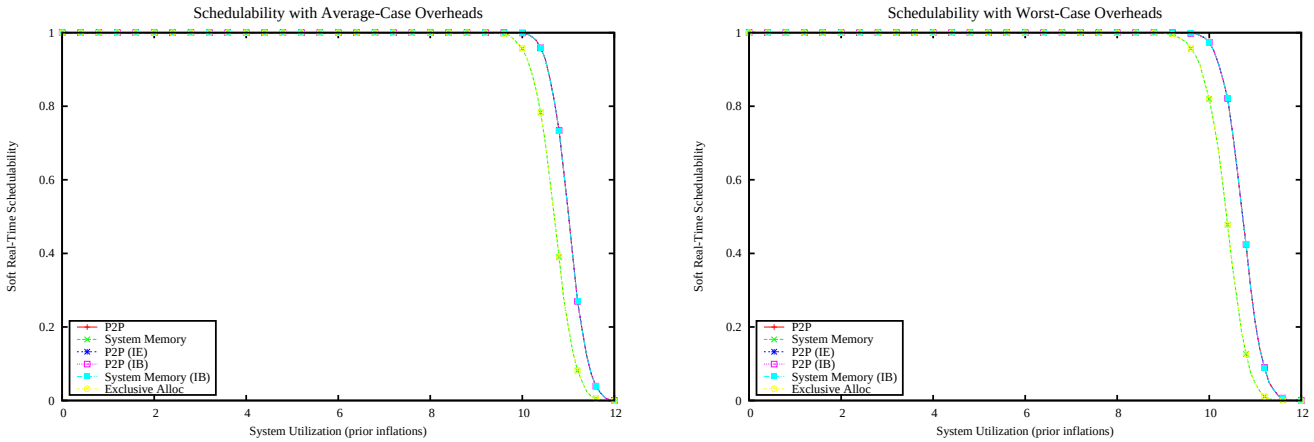

Figure 2798: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

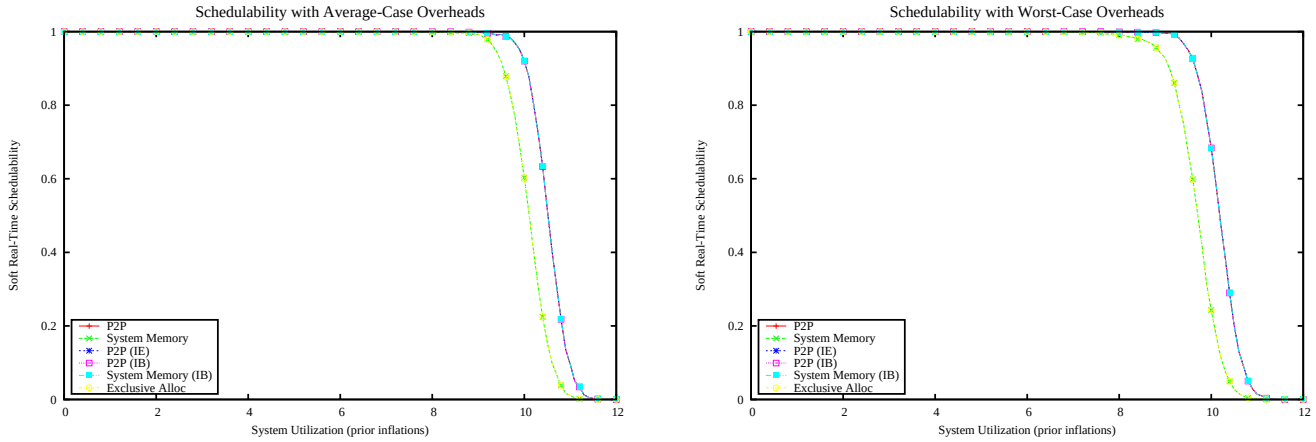

Figure 2799: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

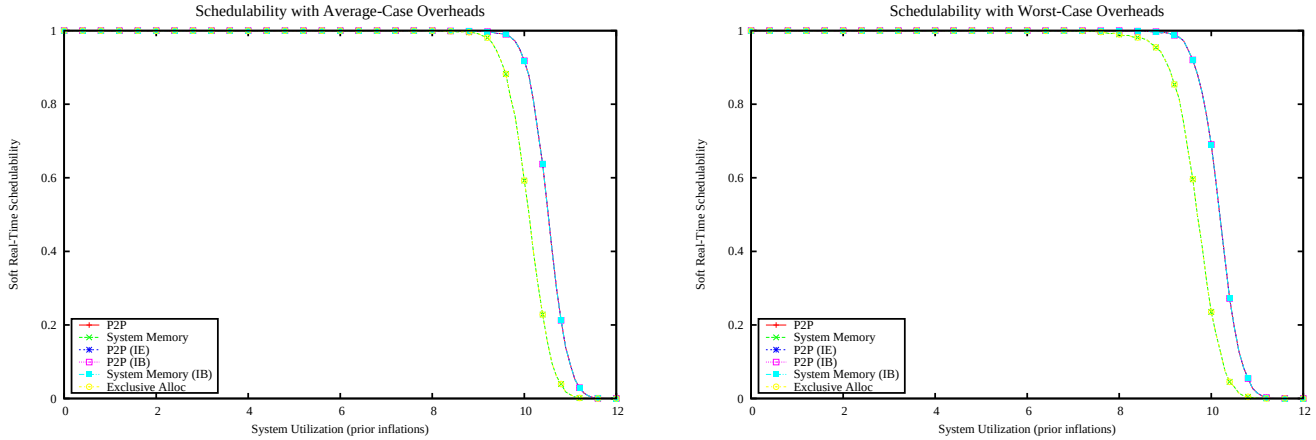

Figure 2800: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

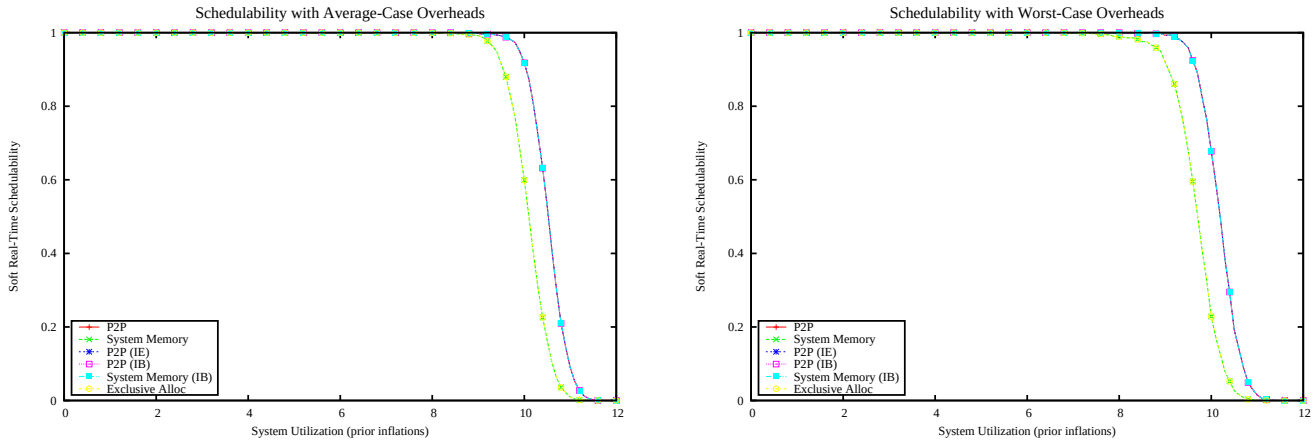

Figure 2801: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

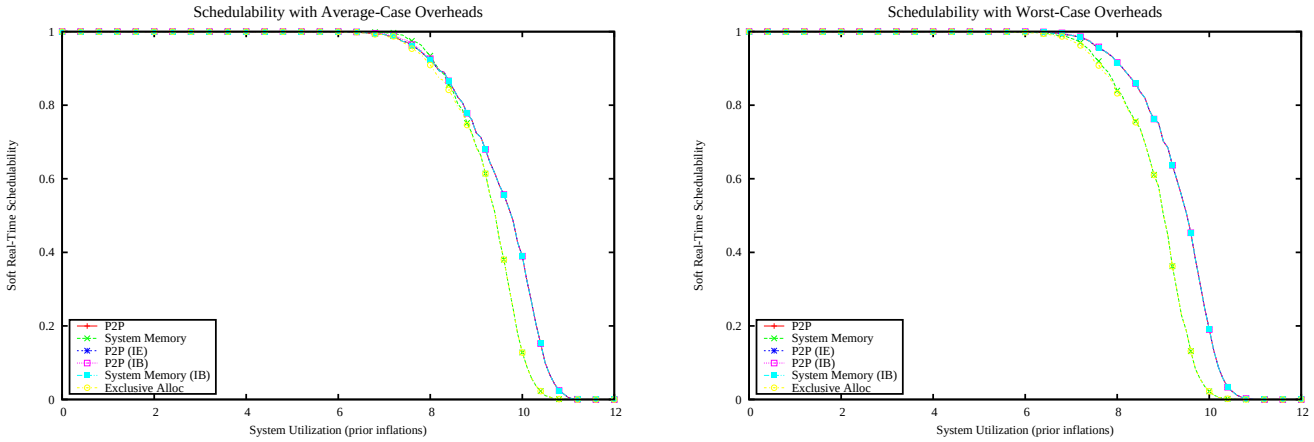

Figure 2802: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

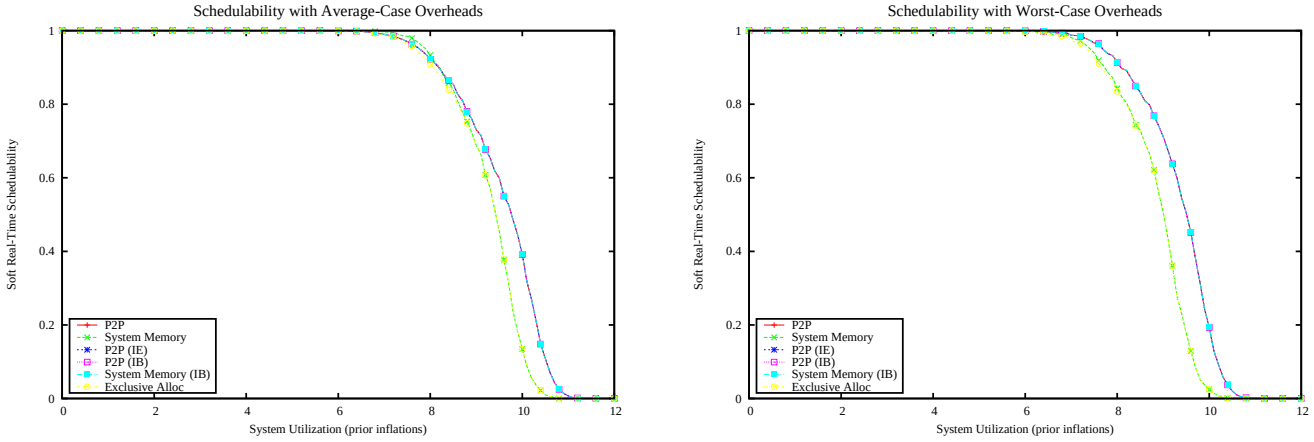

Figure 2803: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

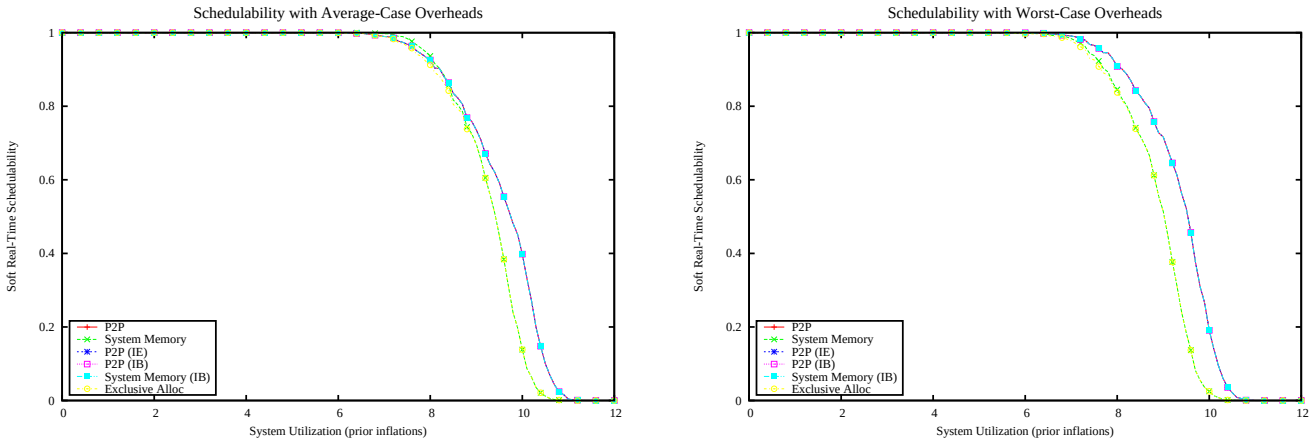

Figure 2804: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

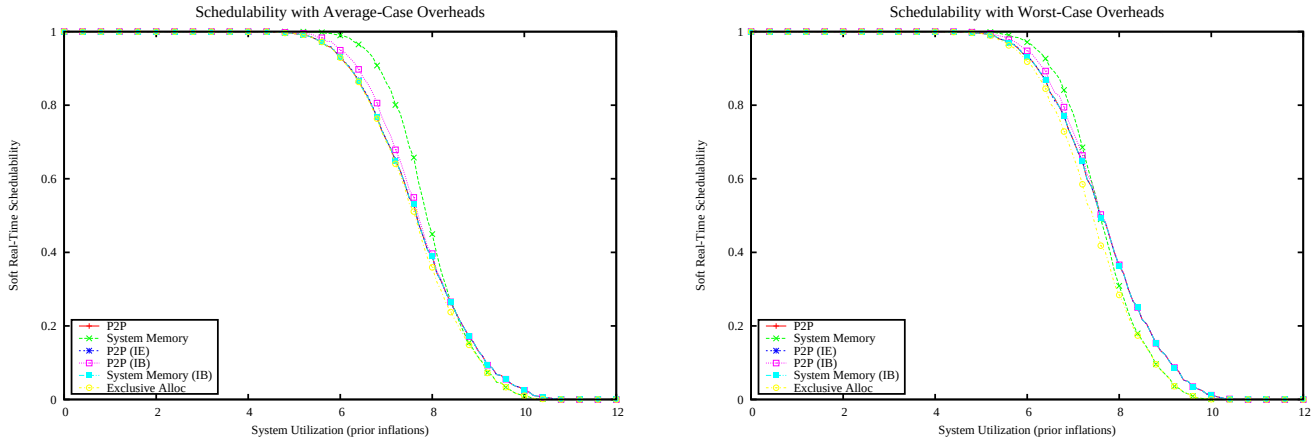

Figure 2805: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

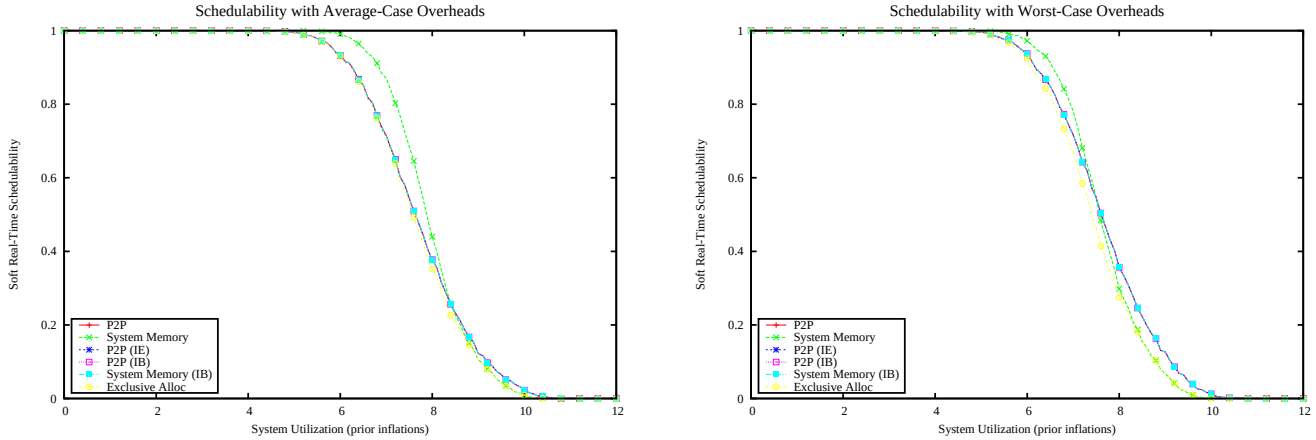

Figure 2806: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

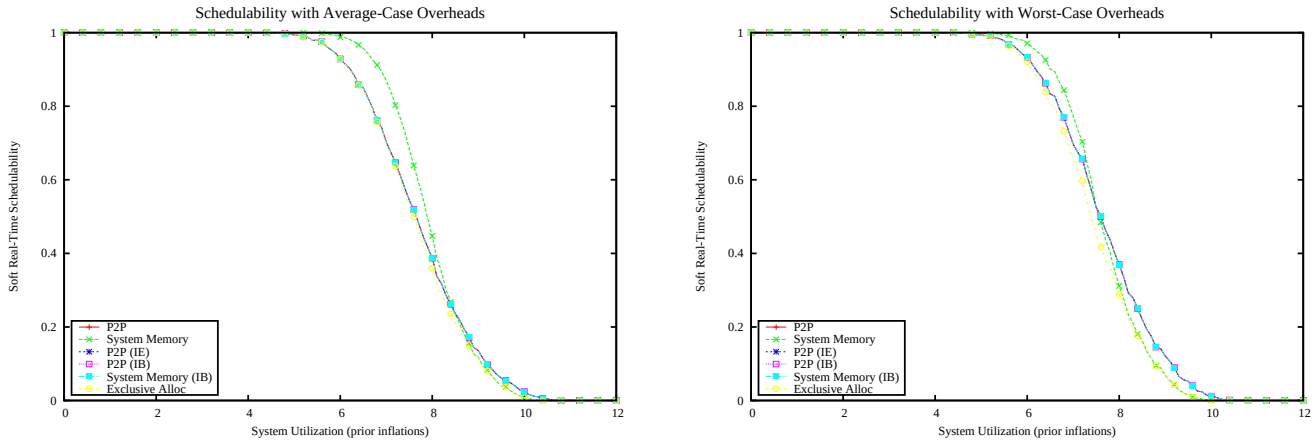

Figure 2807: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

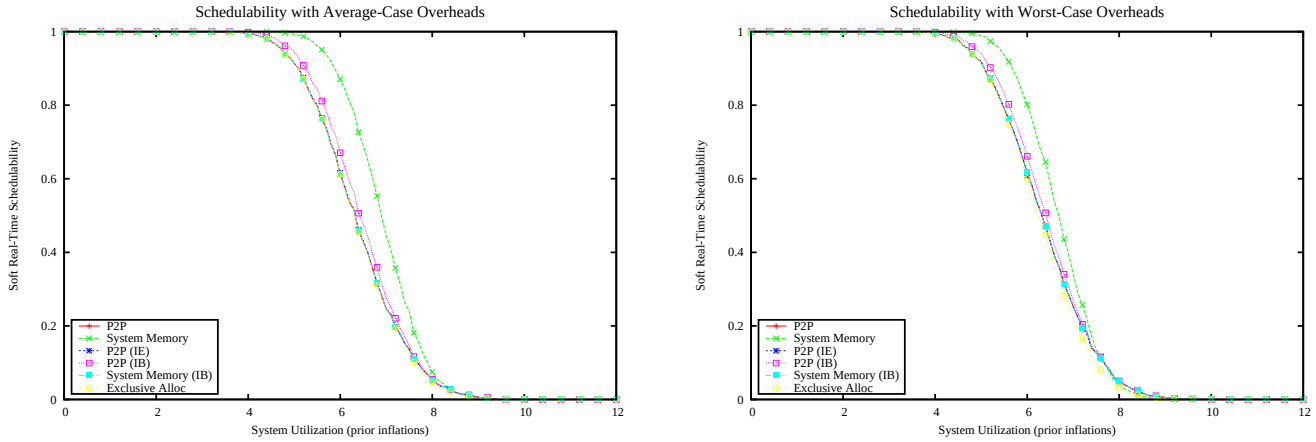

Figure 2808: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

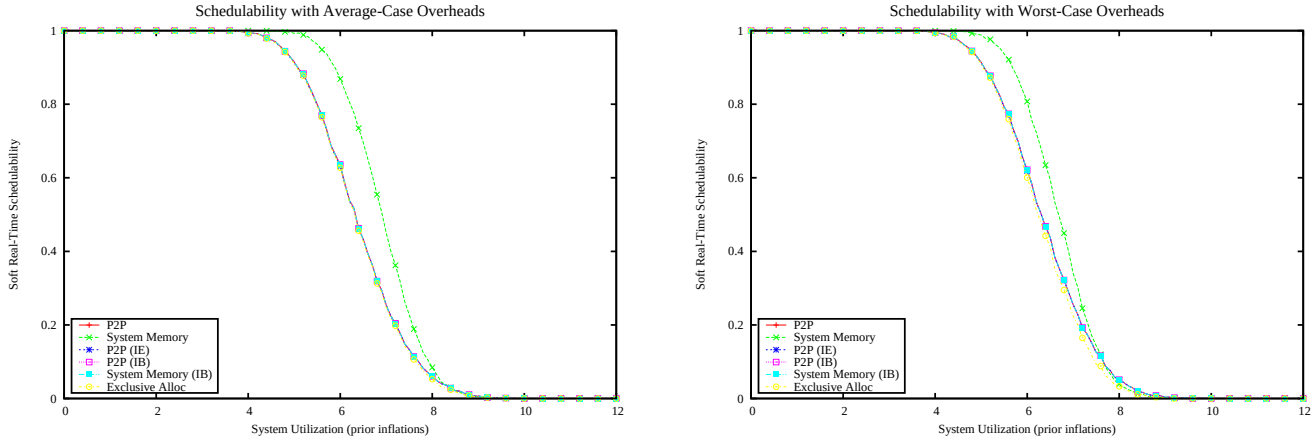

Figure 2809: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

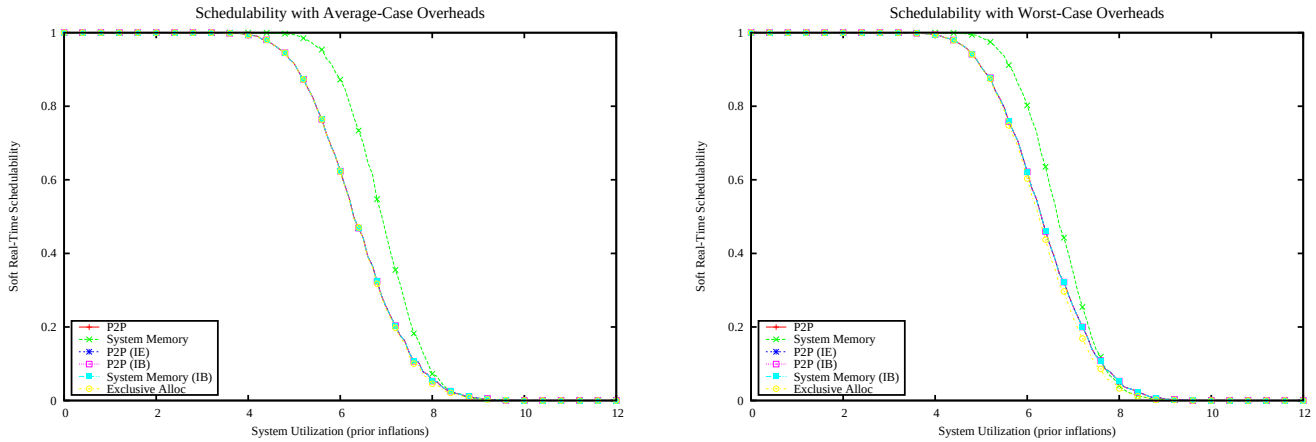

Figure 2810: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

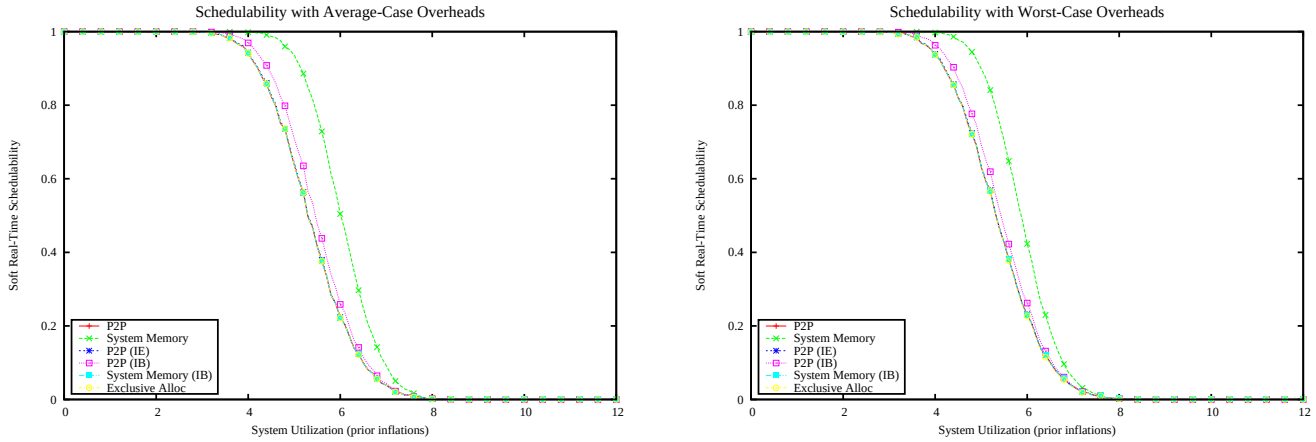

Figure 2811: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

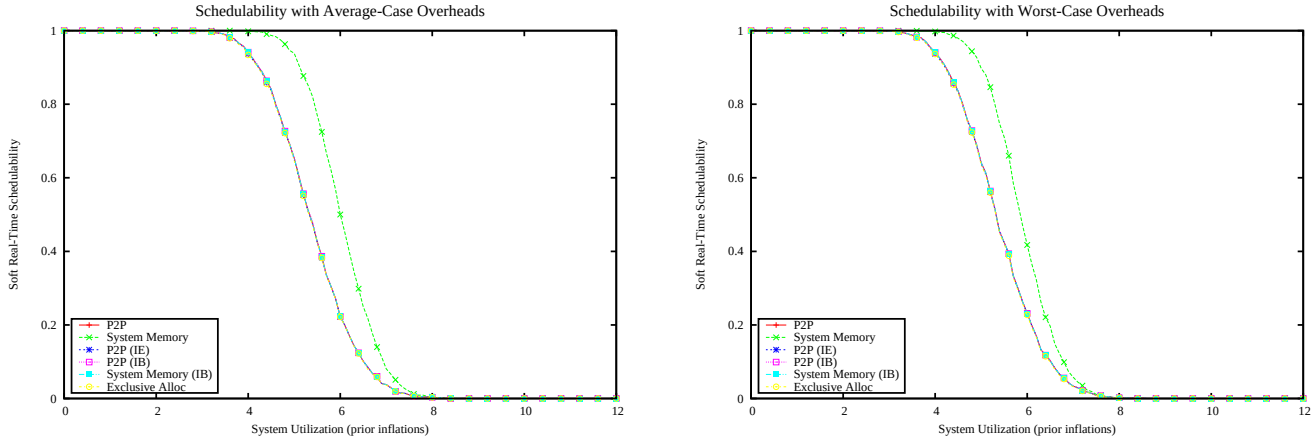

Figure 2812: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

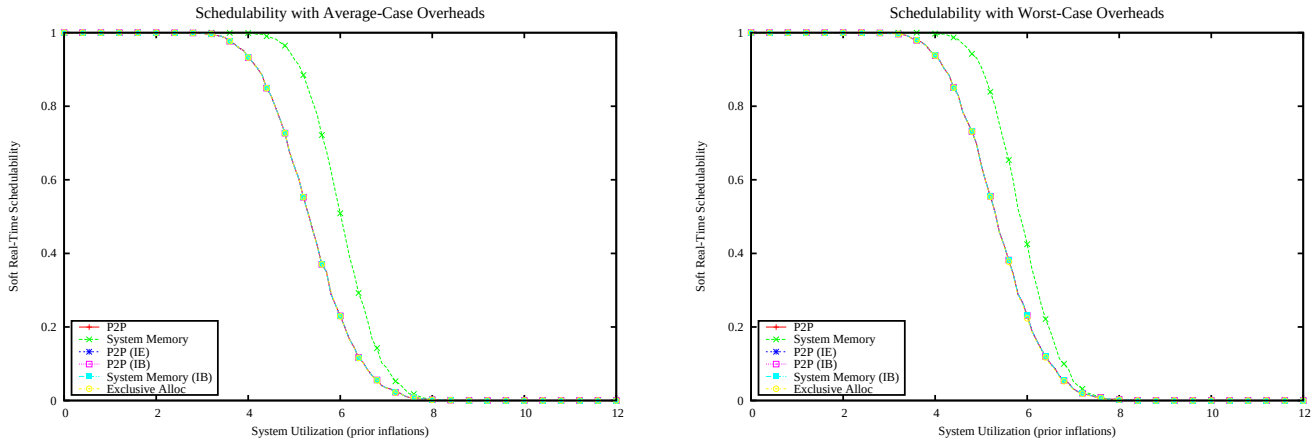

Figure 2813: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

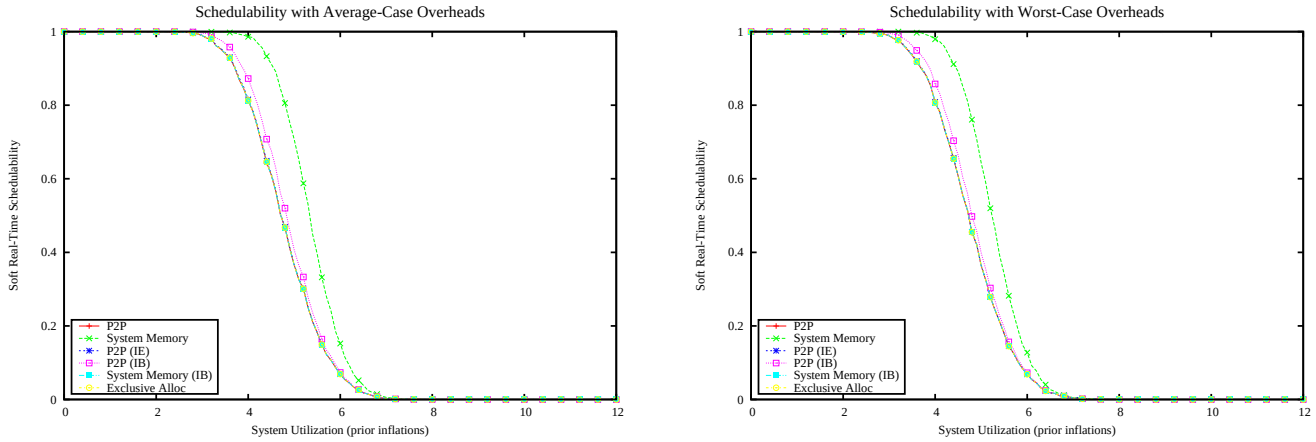

Figure 2814: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

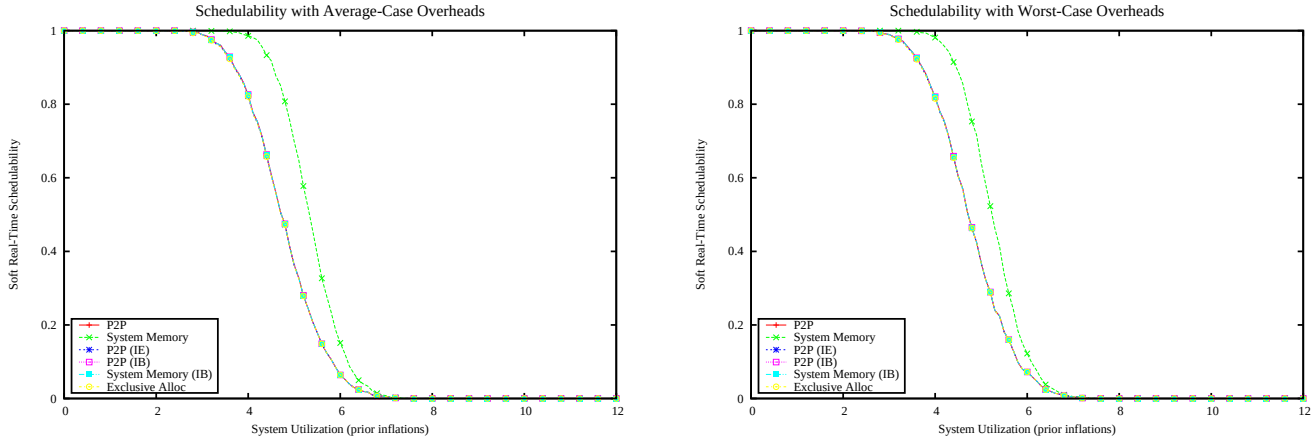

Figure 2815: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

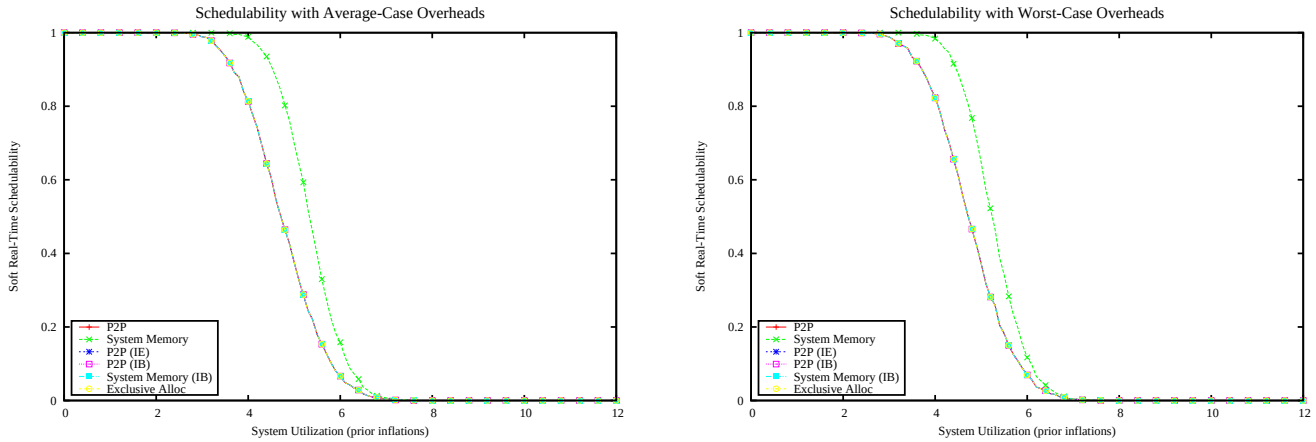

Figure 2816: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

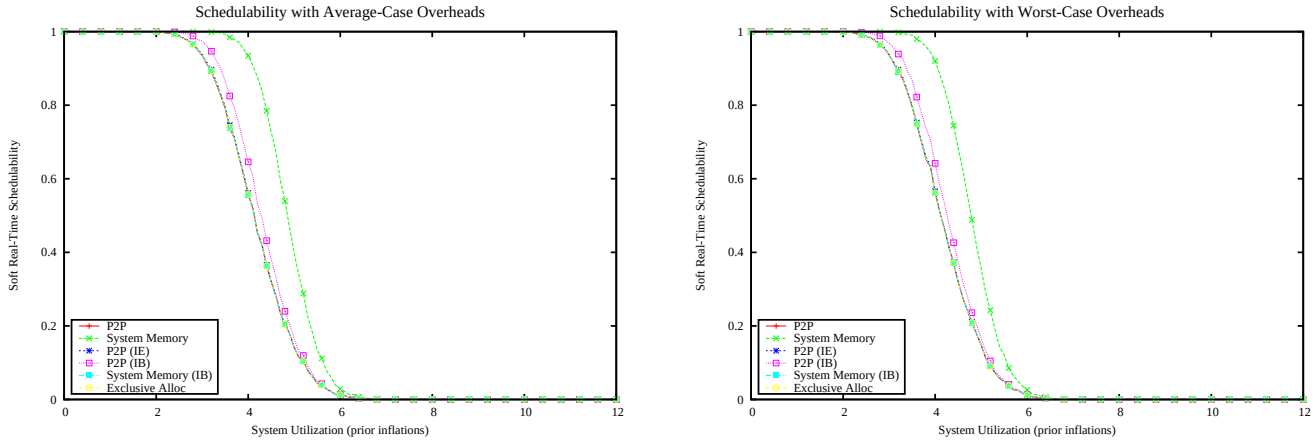

Figure 2817: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

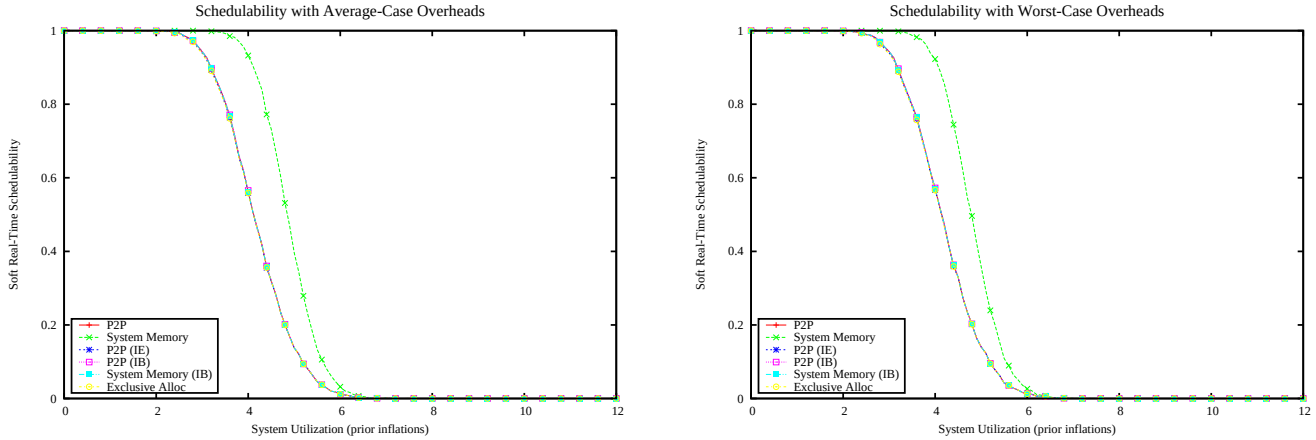

Figure 2818: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

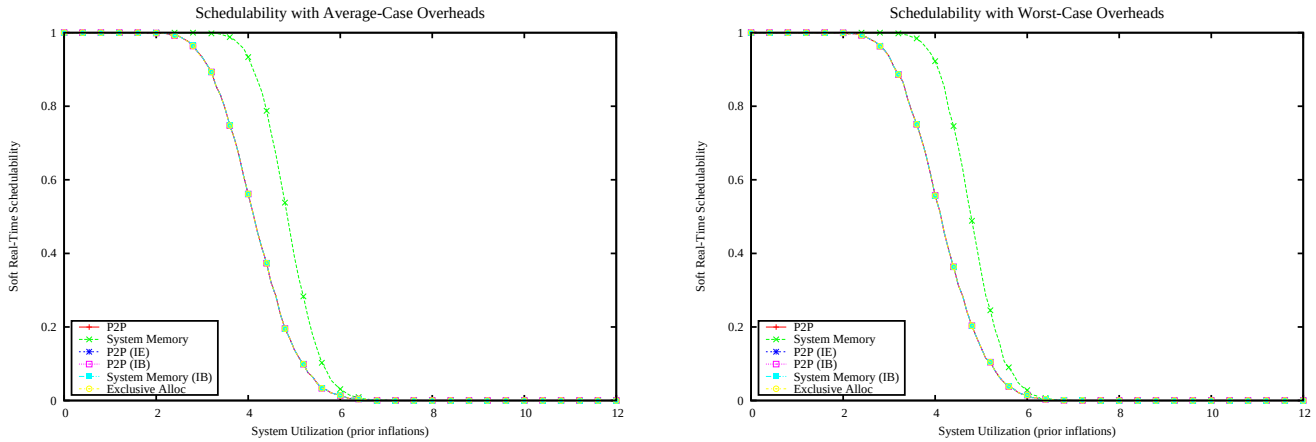

Figure 2819: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

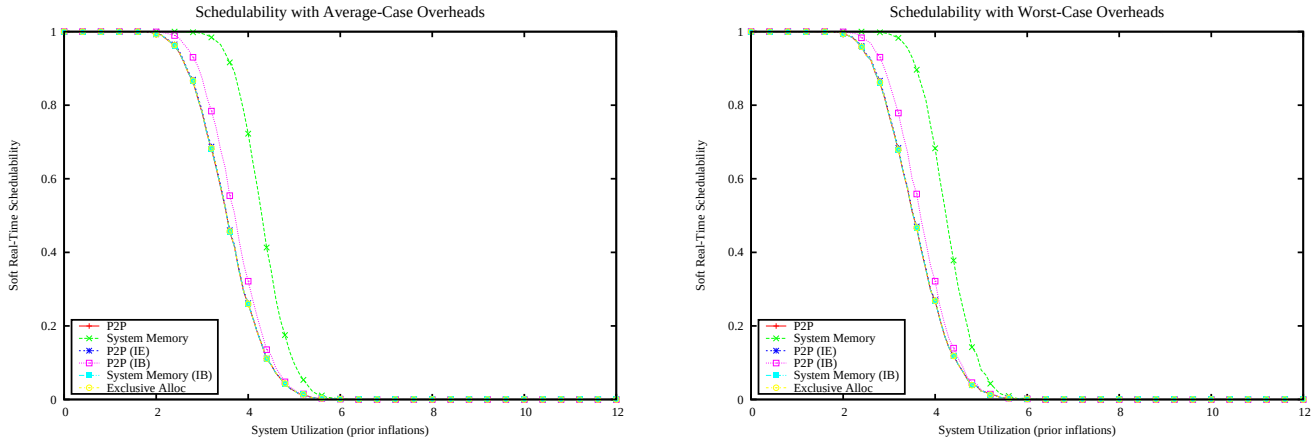

Figure 2820: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

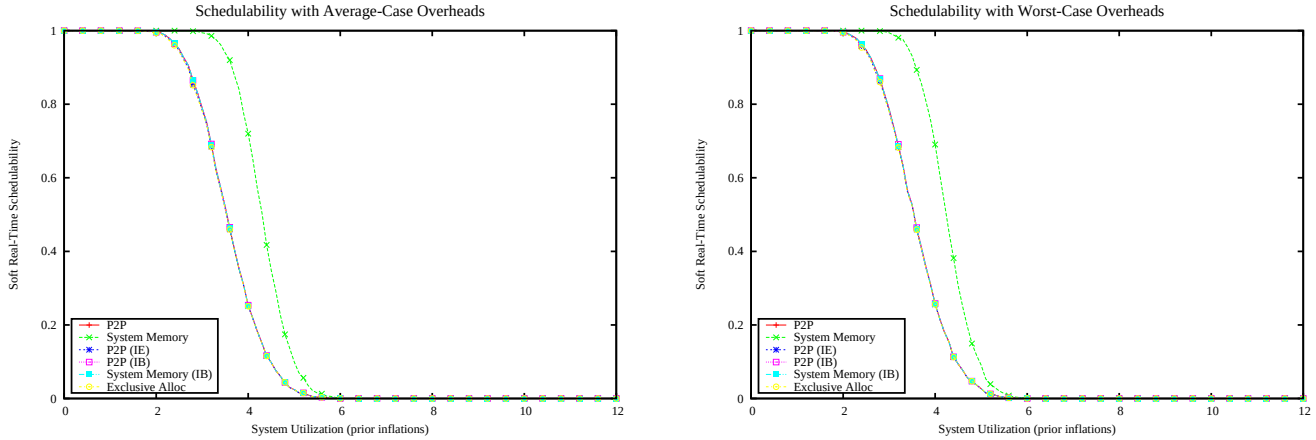

Figure 2821: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

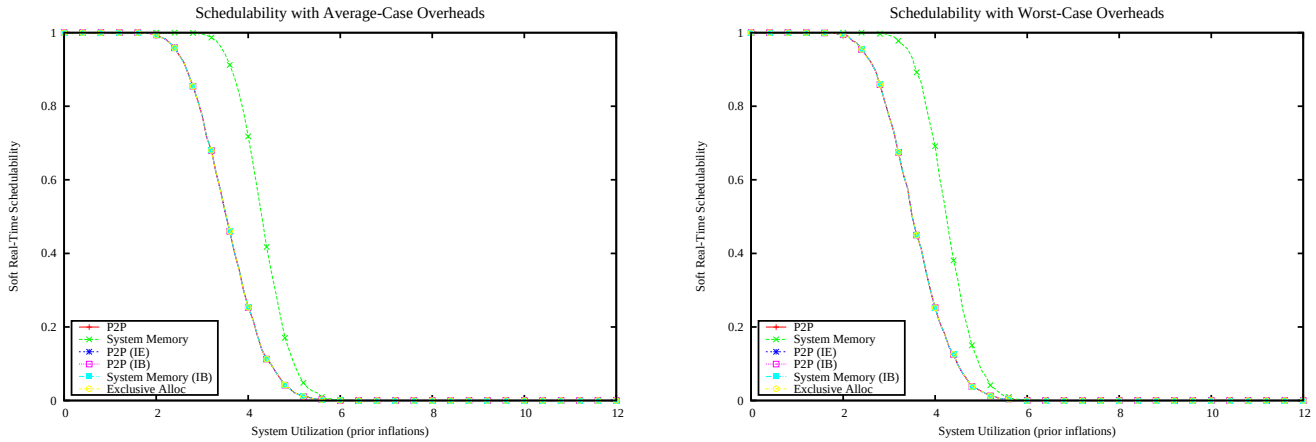

Figure 2822: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

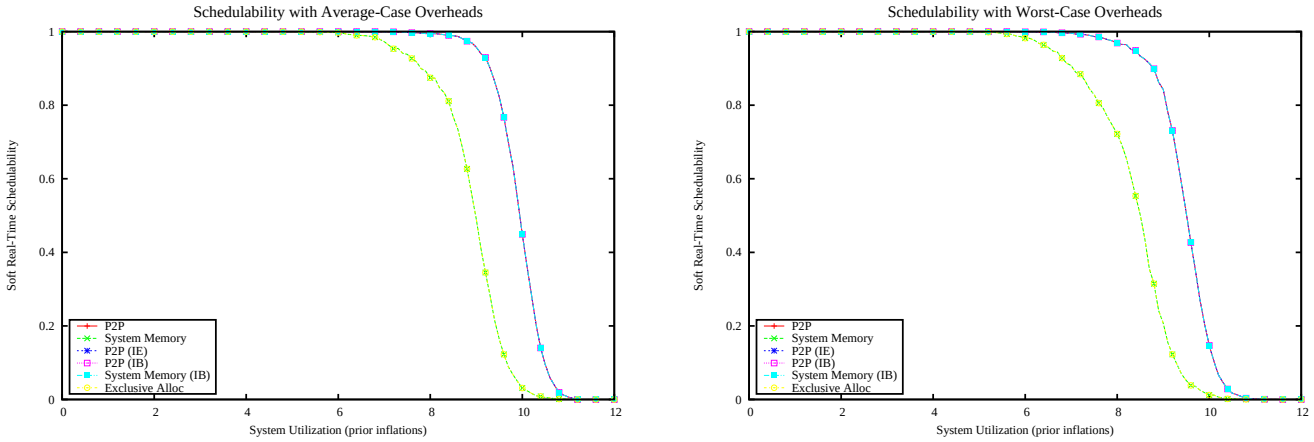

Figure 2823: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

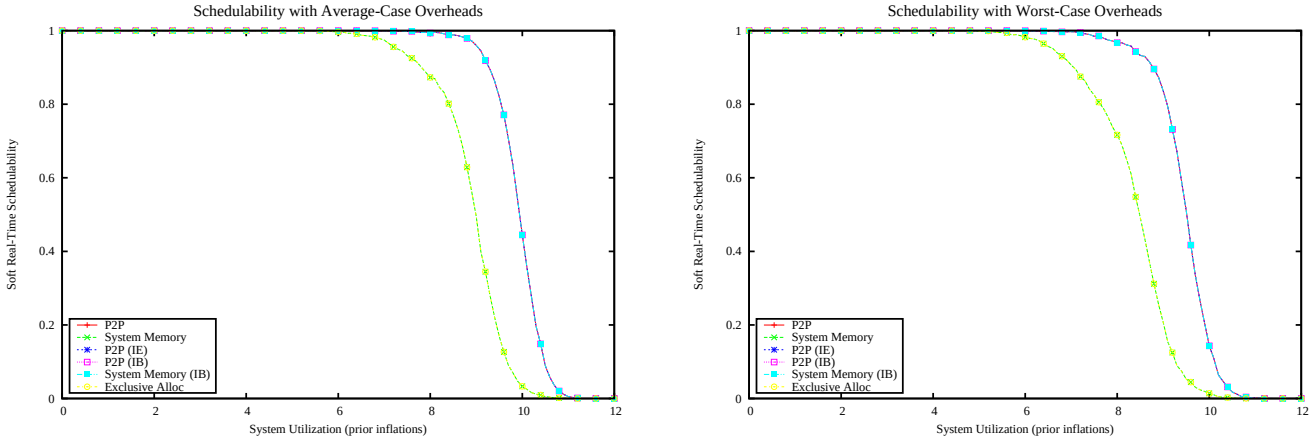

Figure 2824: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

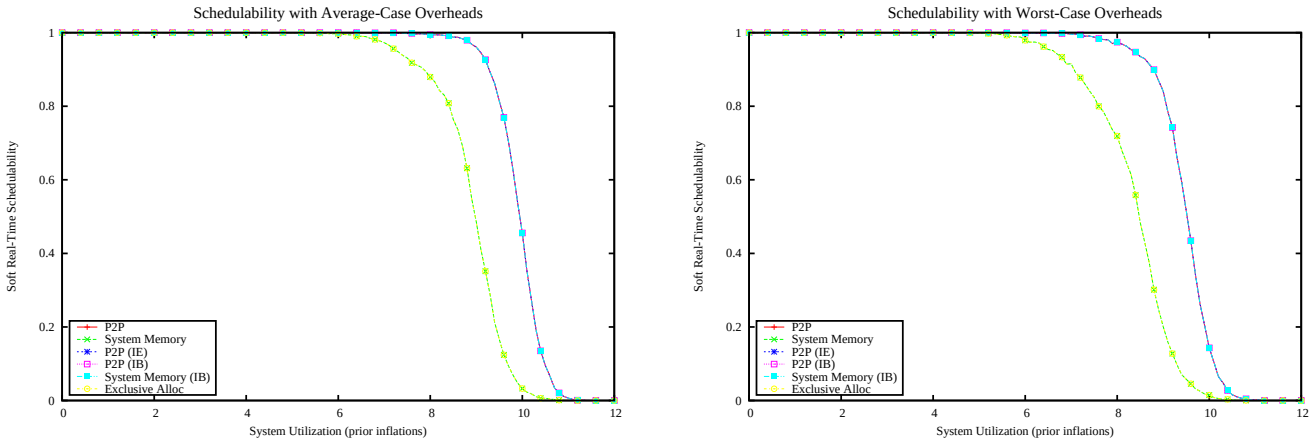

Figure 2825: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

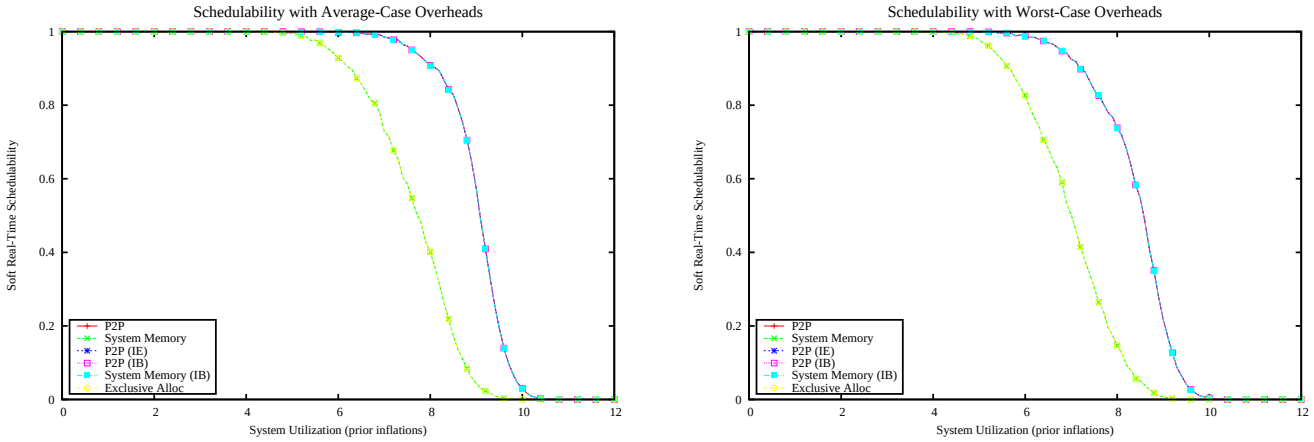

Figure 2826: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

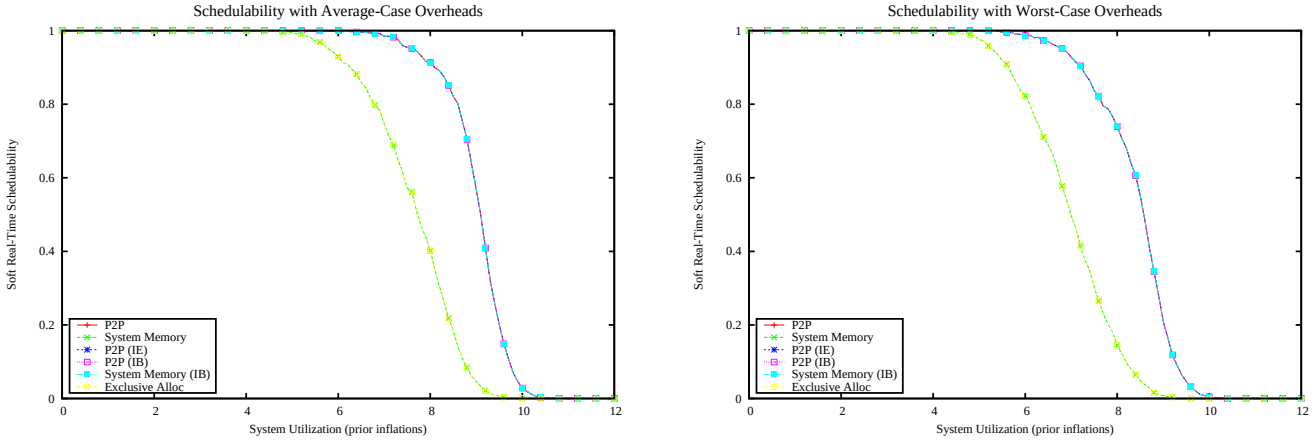

Figure 2827: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

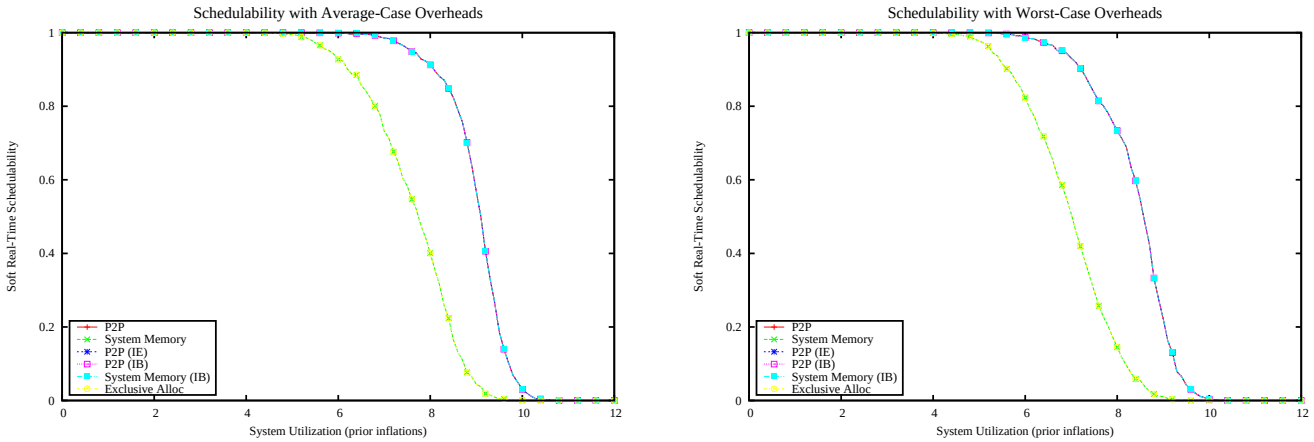

Figure 2828: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

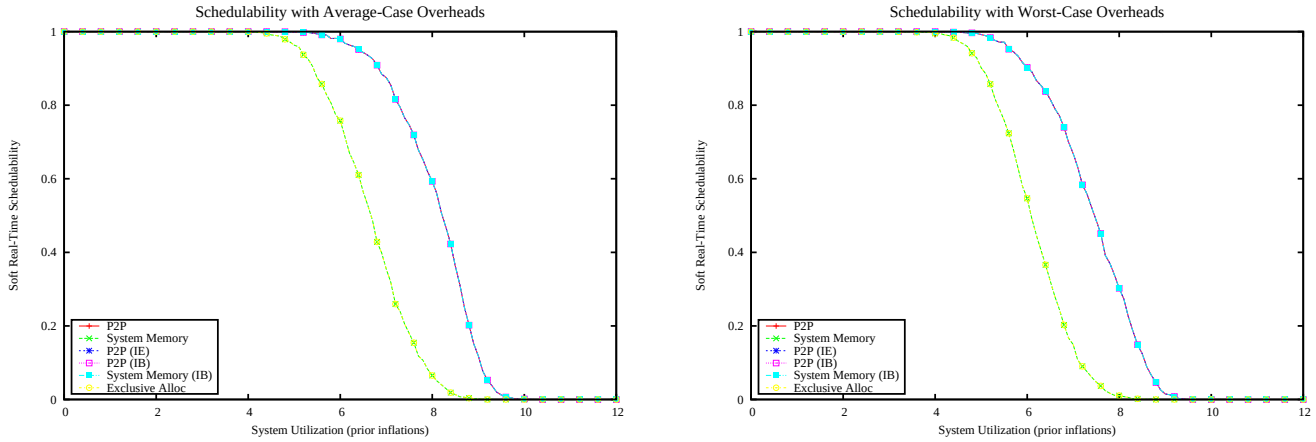

Figure 2829: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

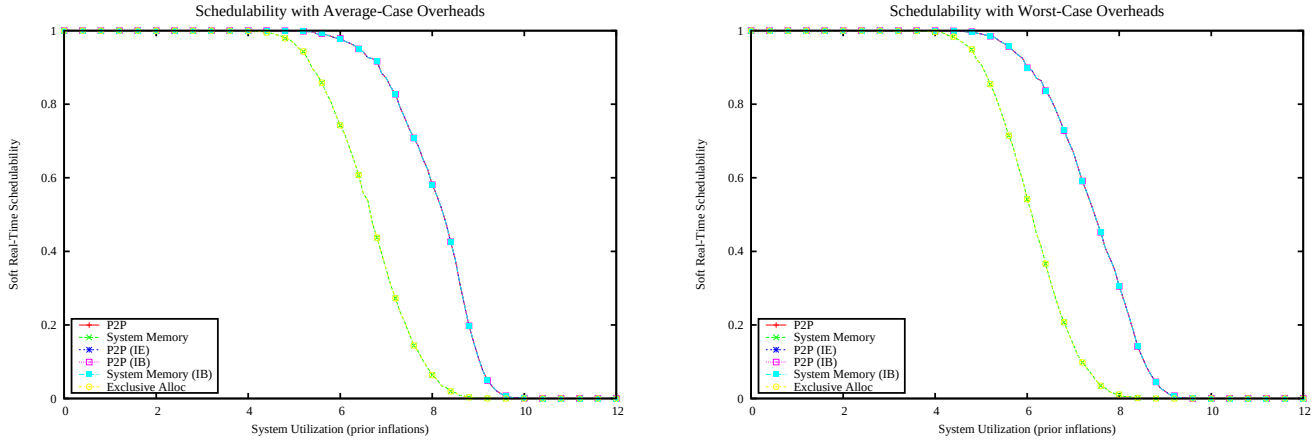

Figure 2830: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

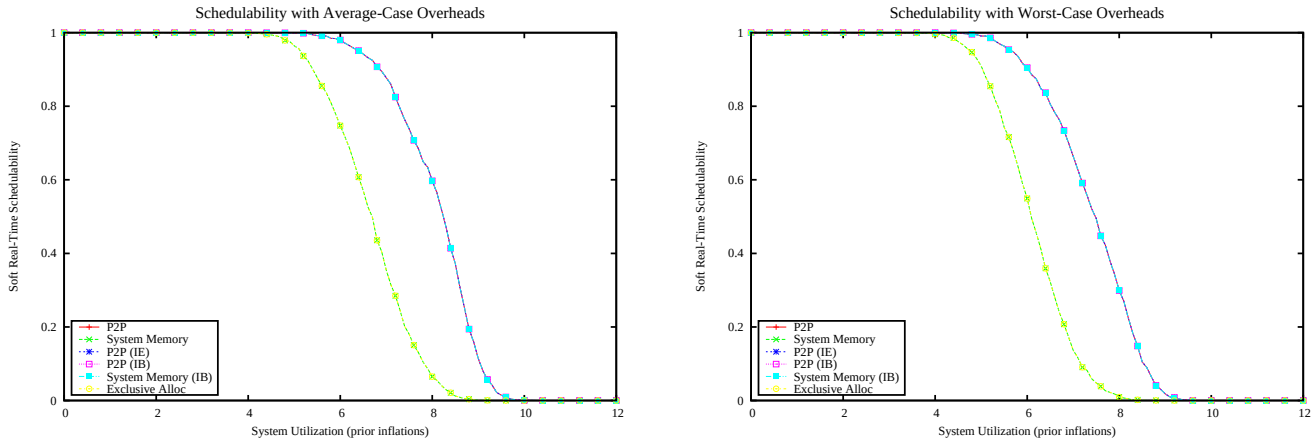

Figure 2831: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

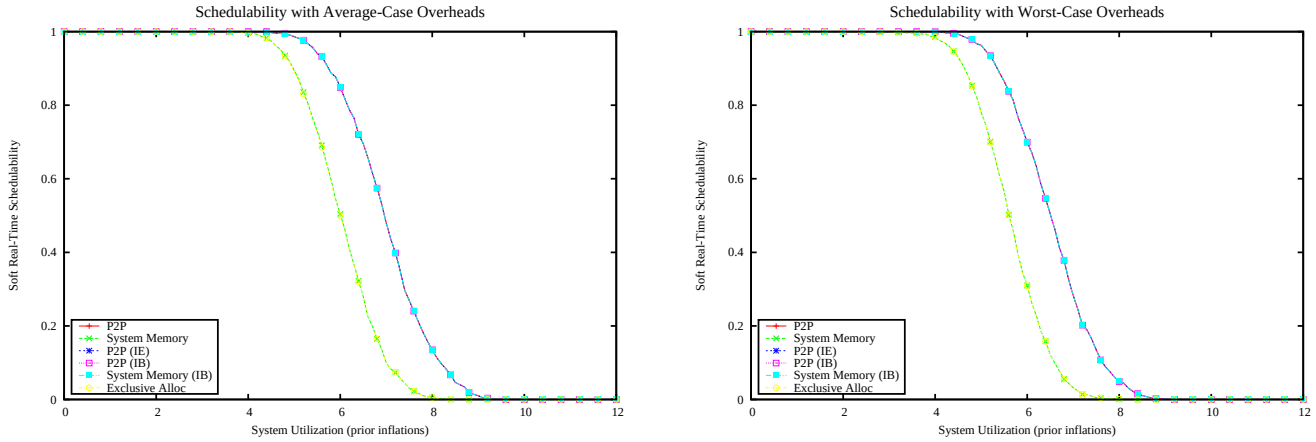

Figure 2832: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

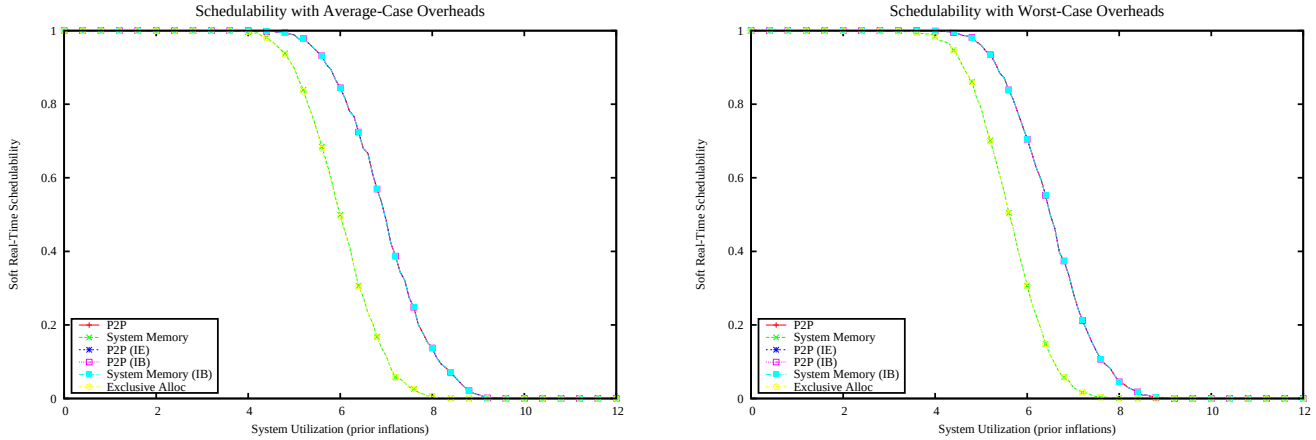

Figure 2833: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

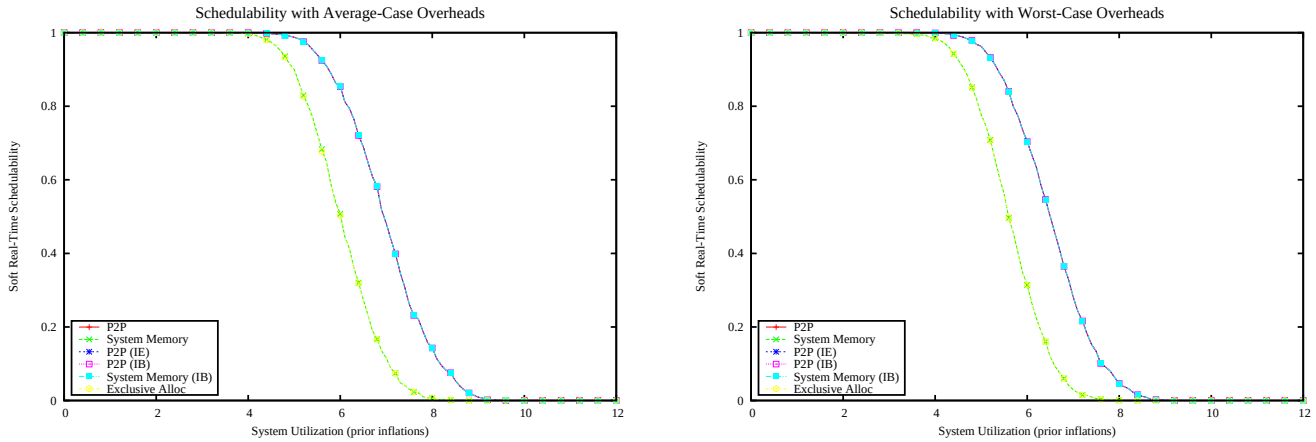

Figure 2834: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

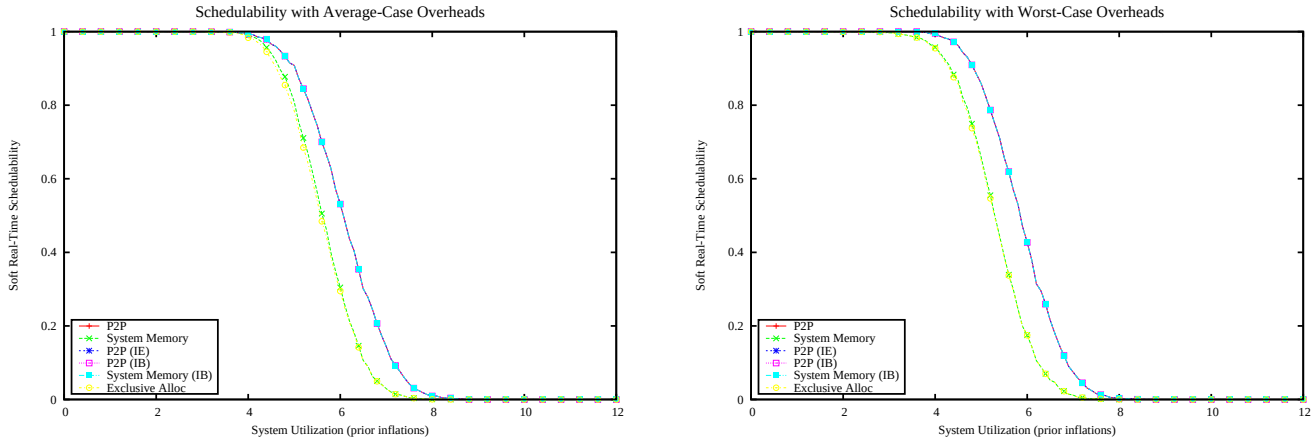

Figure 2835: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

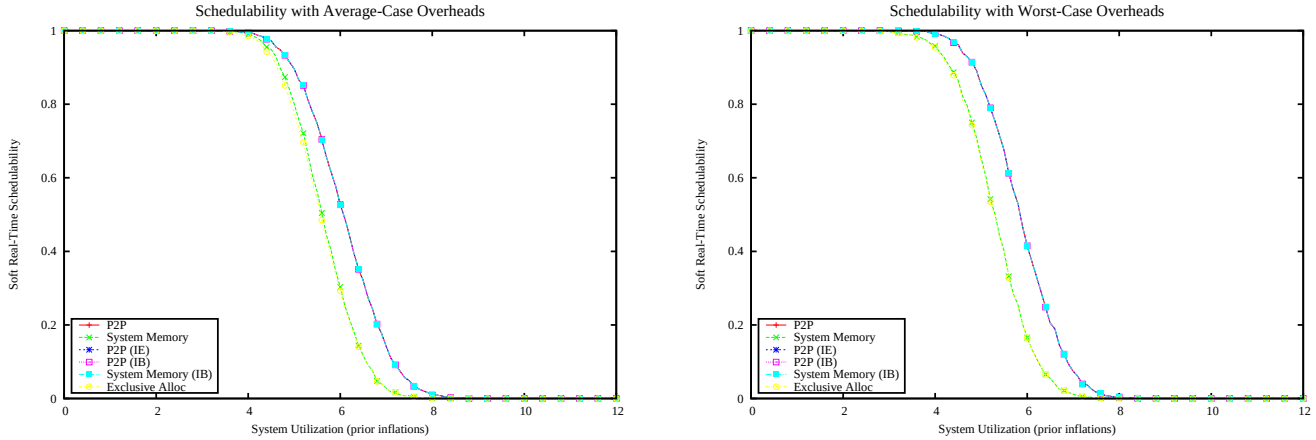

Figure 2836: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

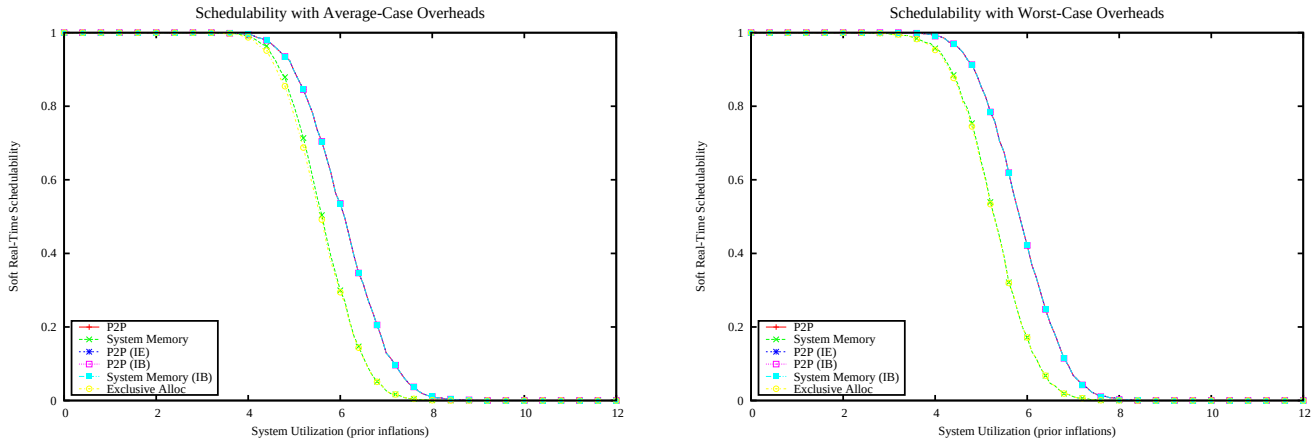

Figure 2837: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

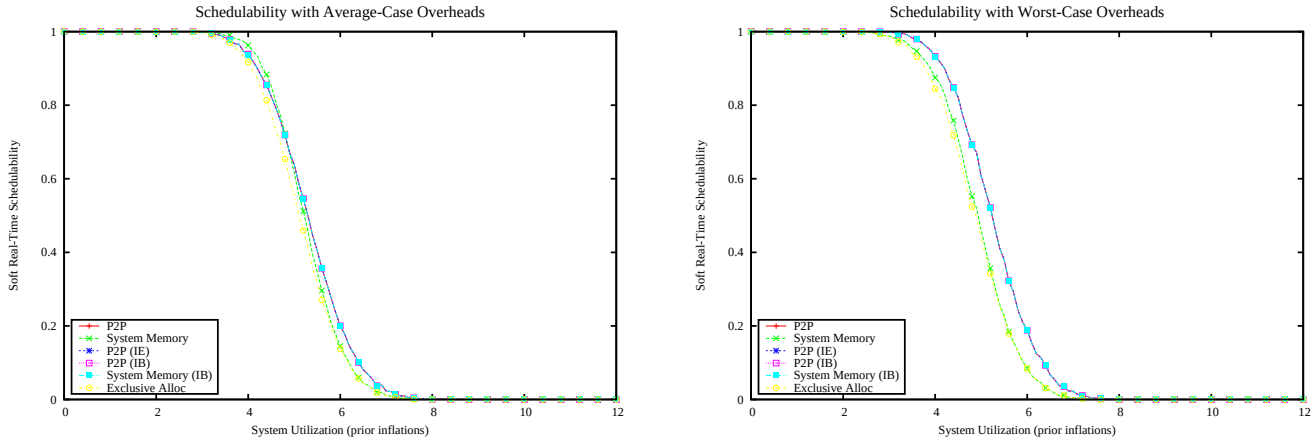

Figure 2838: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

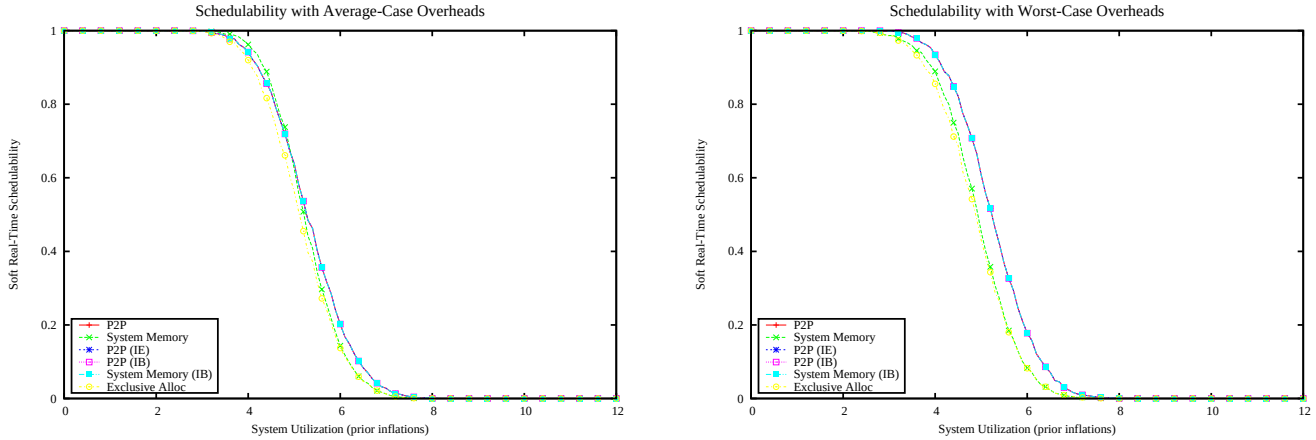

Figure 2839: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

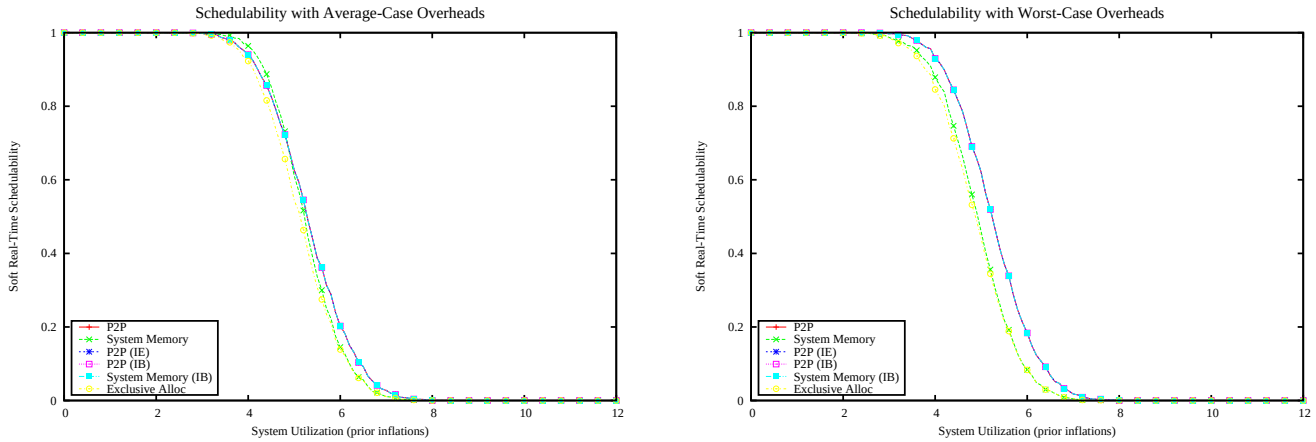

Figure 2840: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

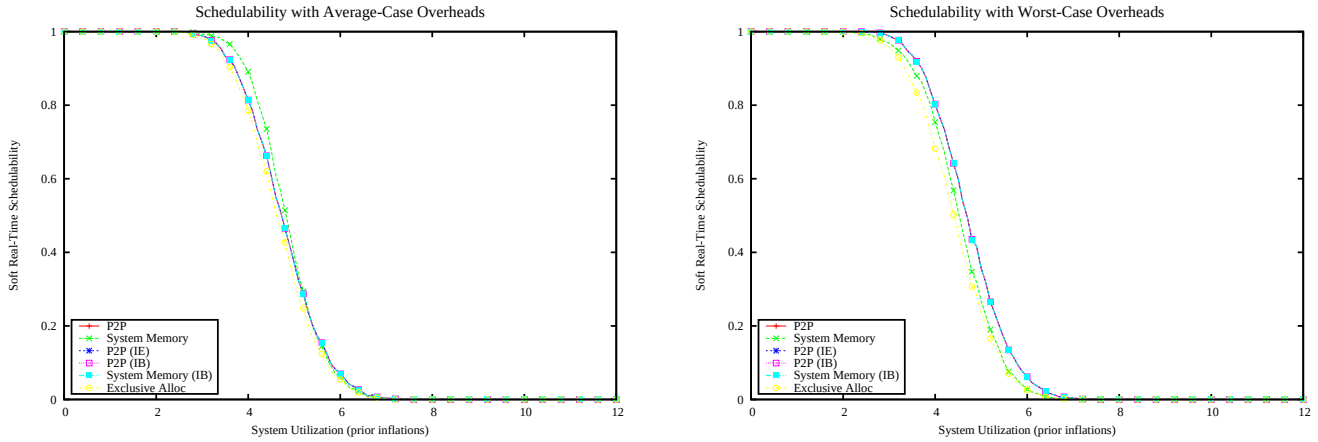

Figure 2841: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

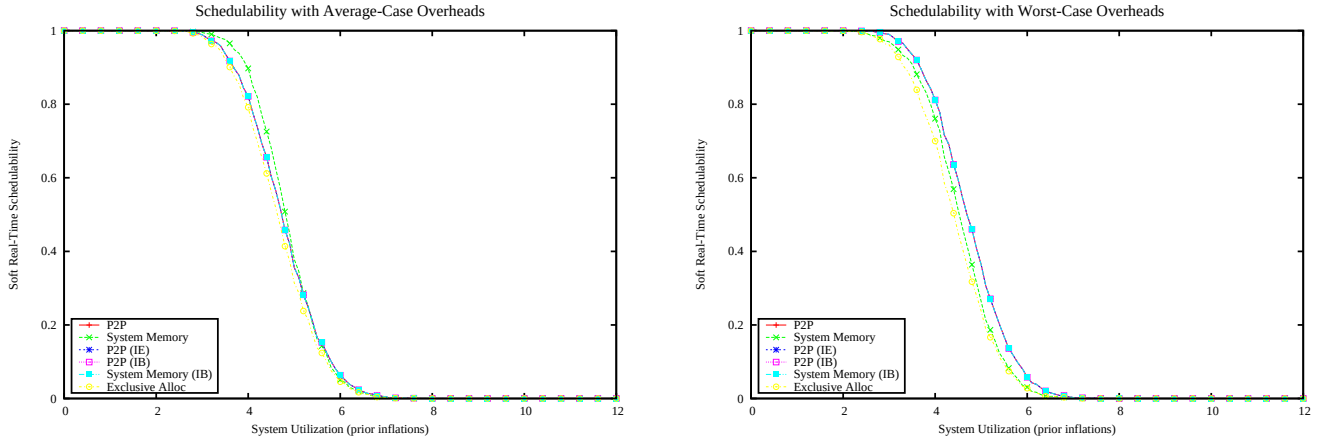

Figure 2842: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

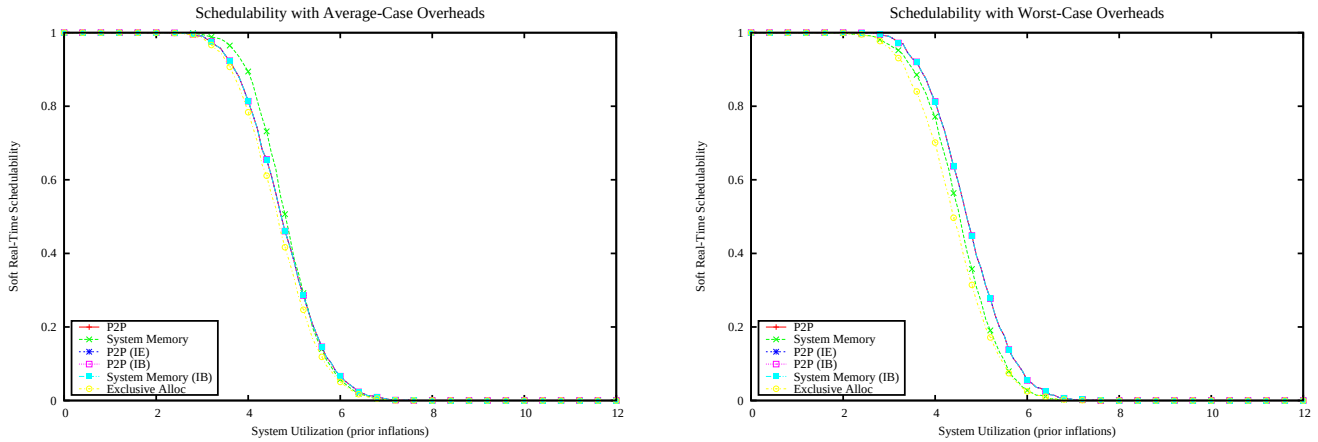

Figure 2843: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

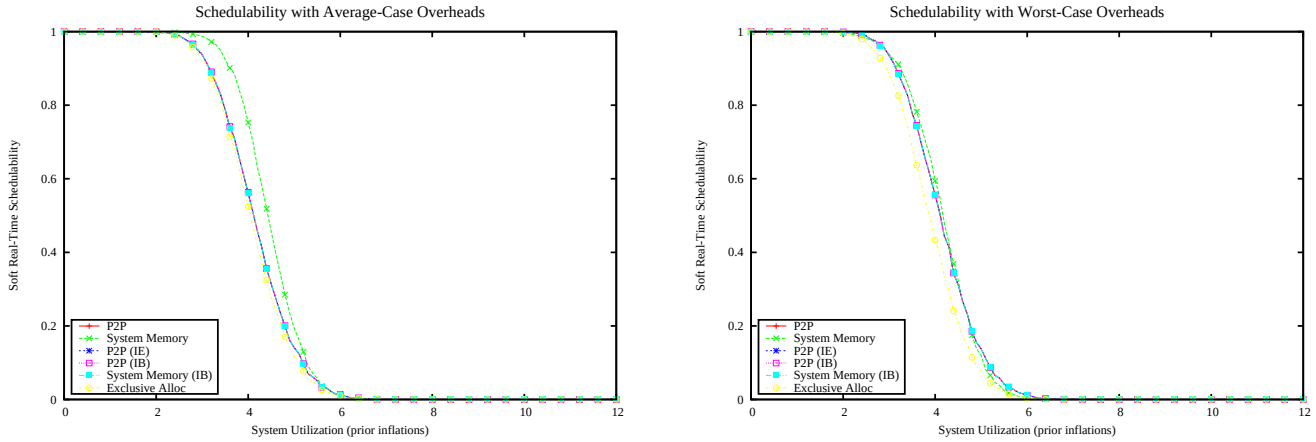

Figure 2844: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

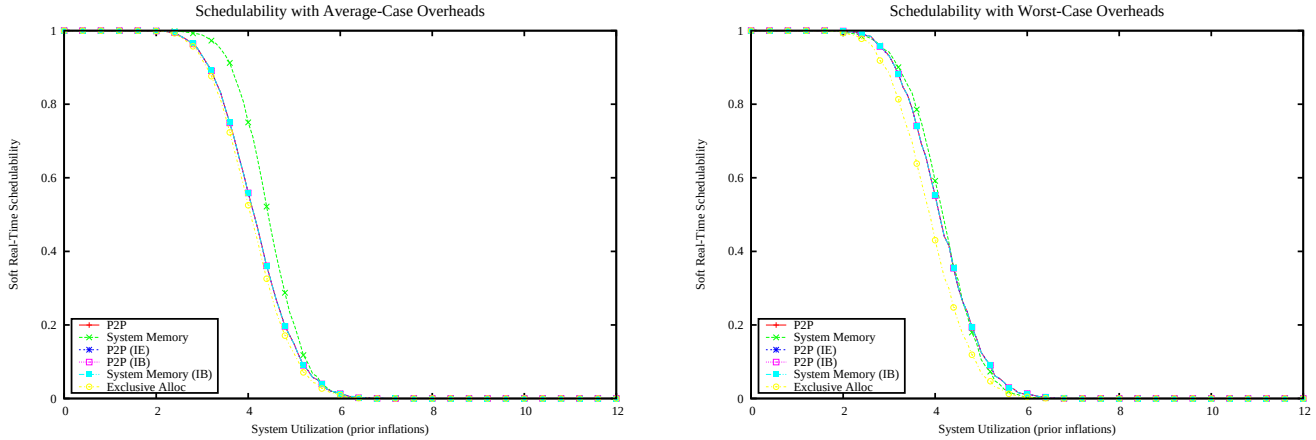

Figure 2845: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

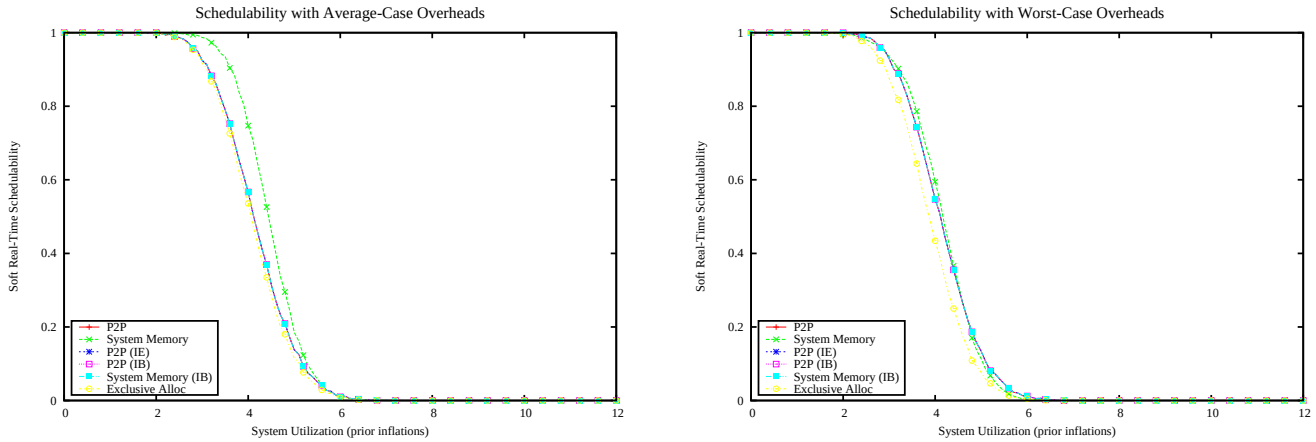

Figure 2846: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

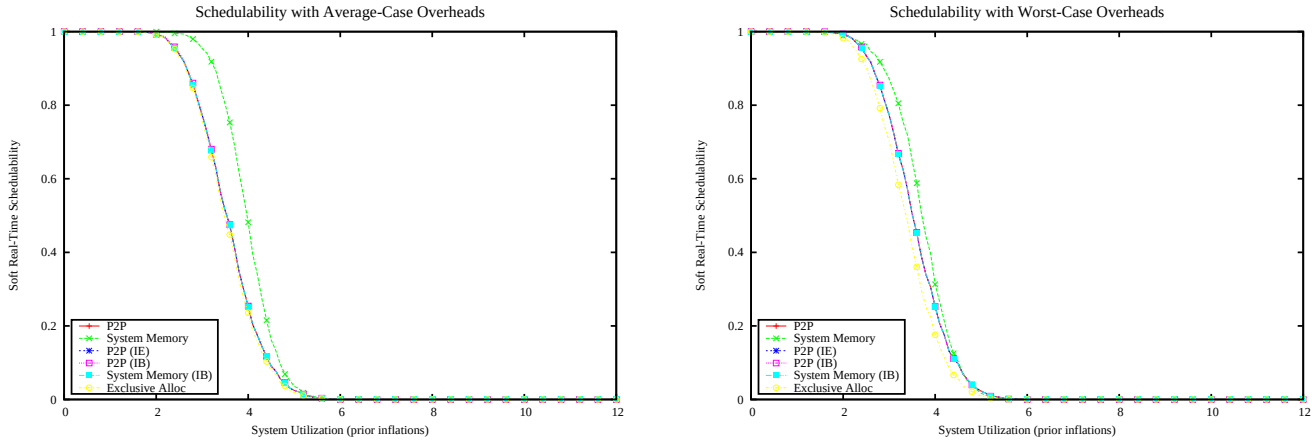

Figure 2847: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

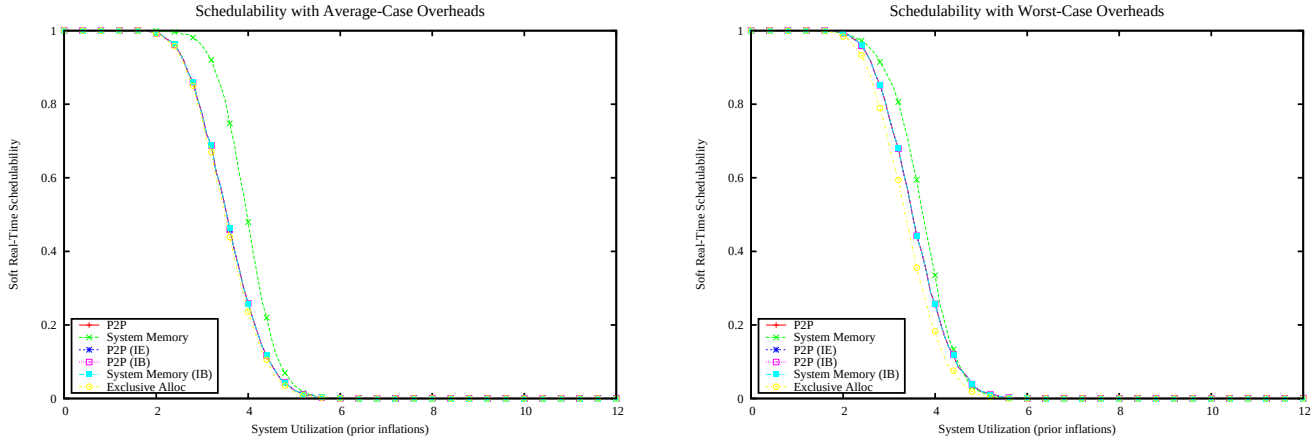

Figure 2848: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

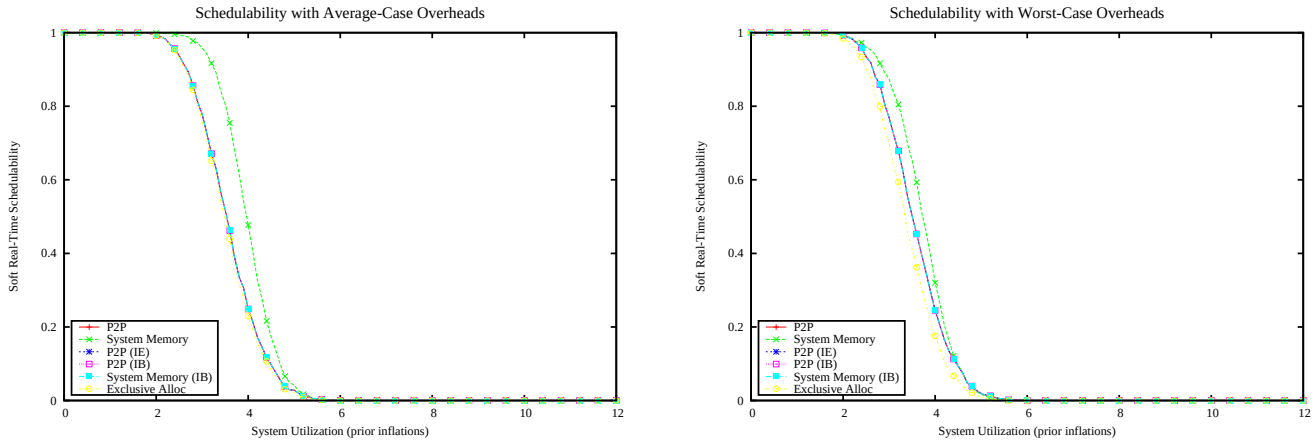

Figure 2849: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

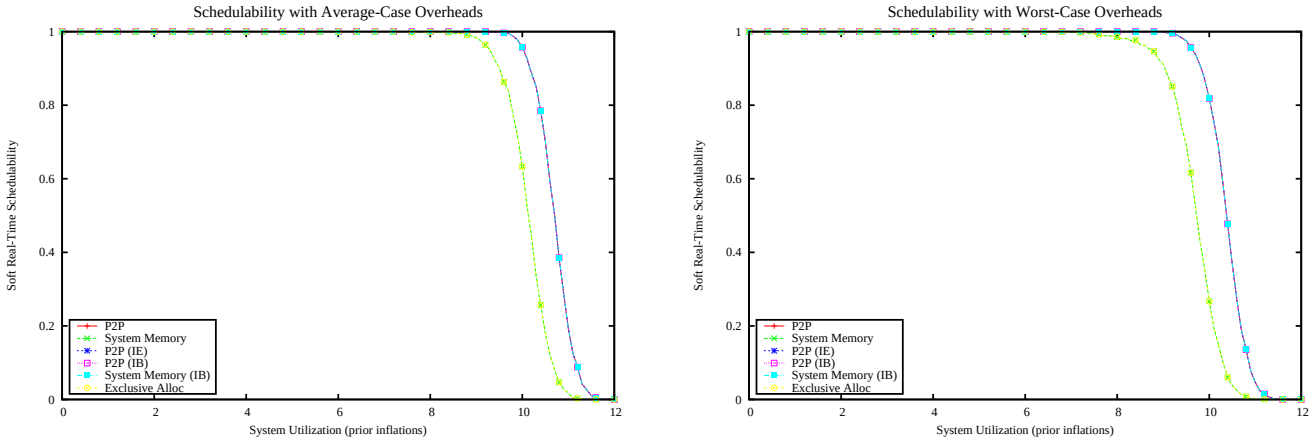

Figure 2850: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

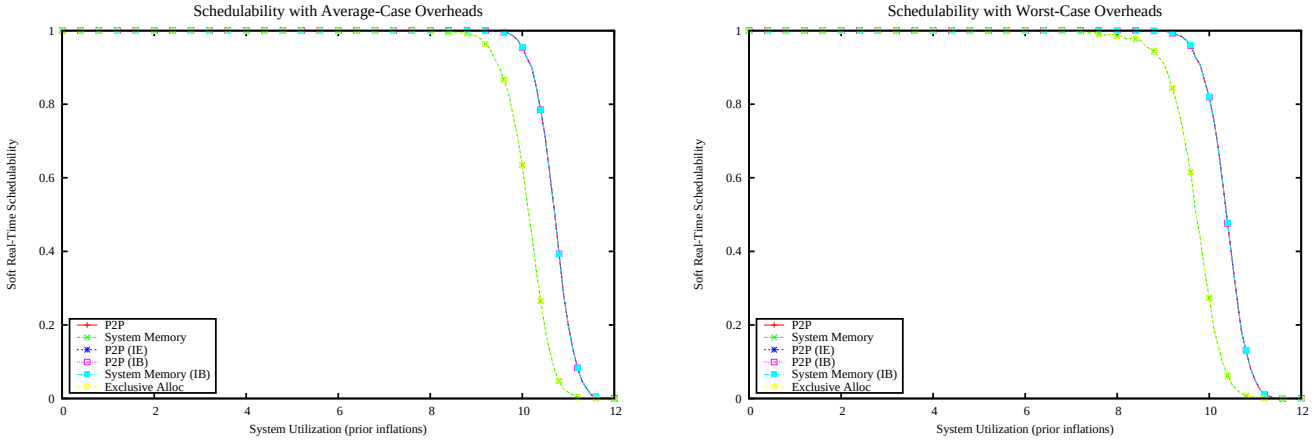

Figure 2851: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

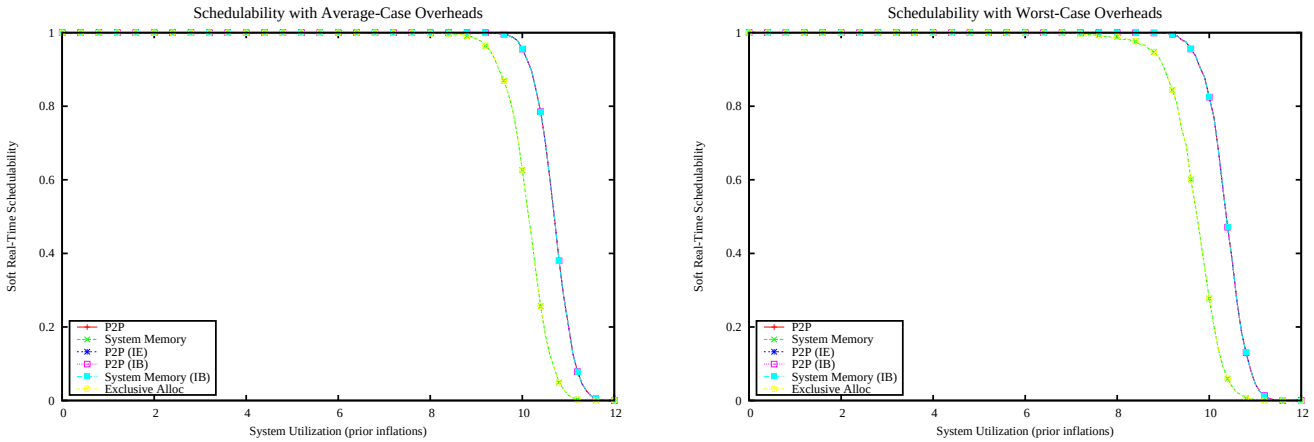

Figure 2852: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

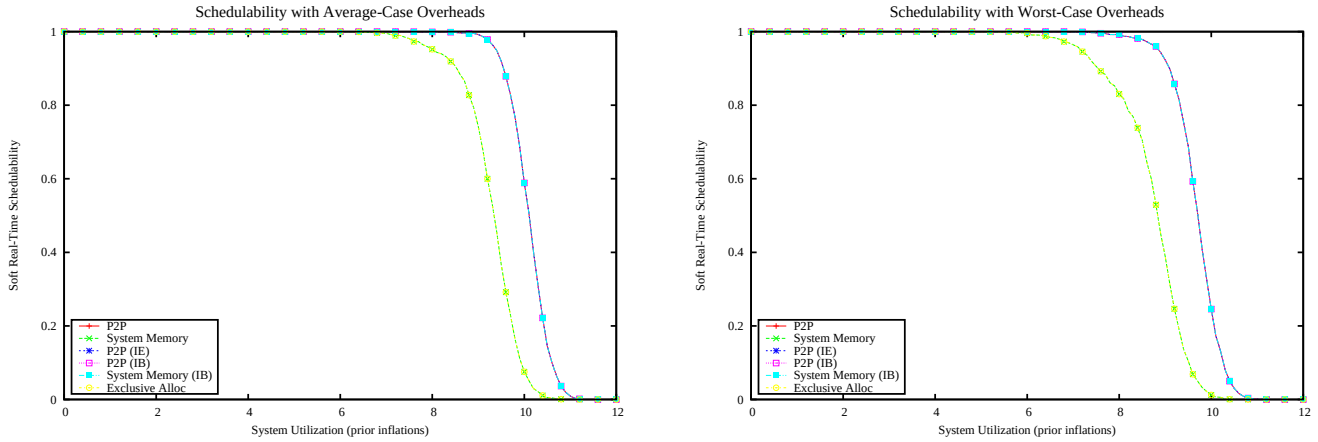

Figure 2853: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

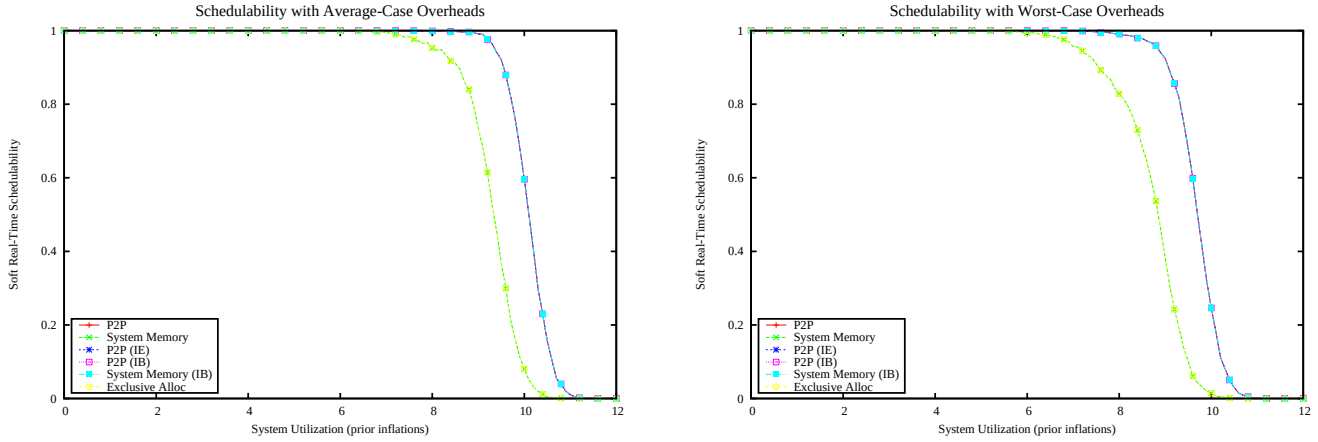

Figure 2854: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

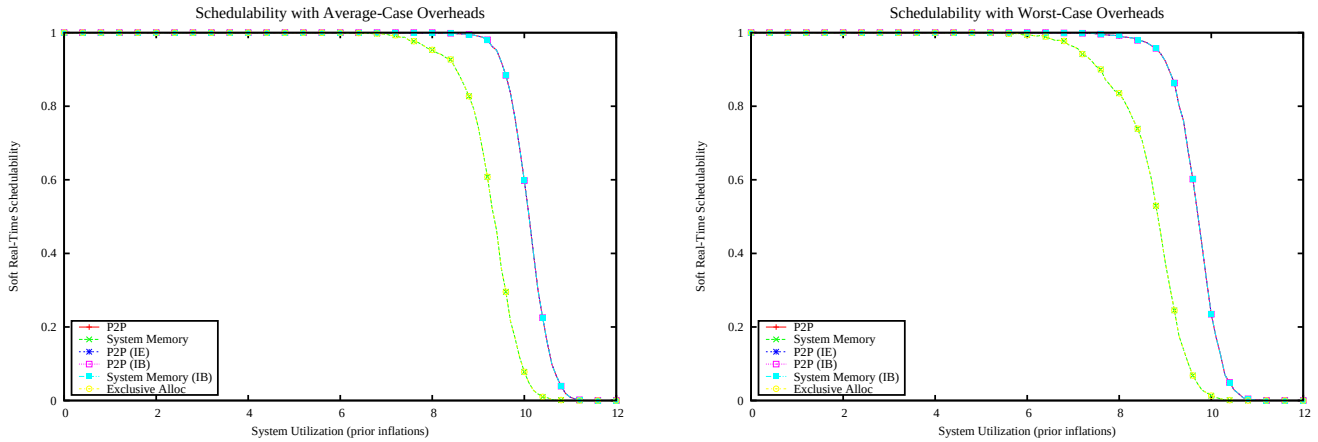

Figure 2855: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

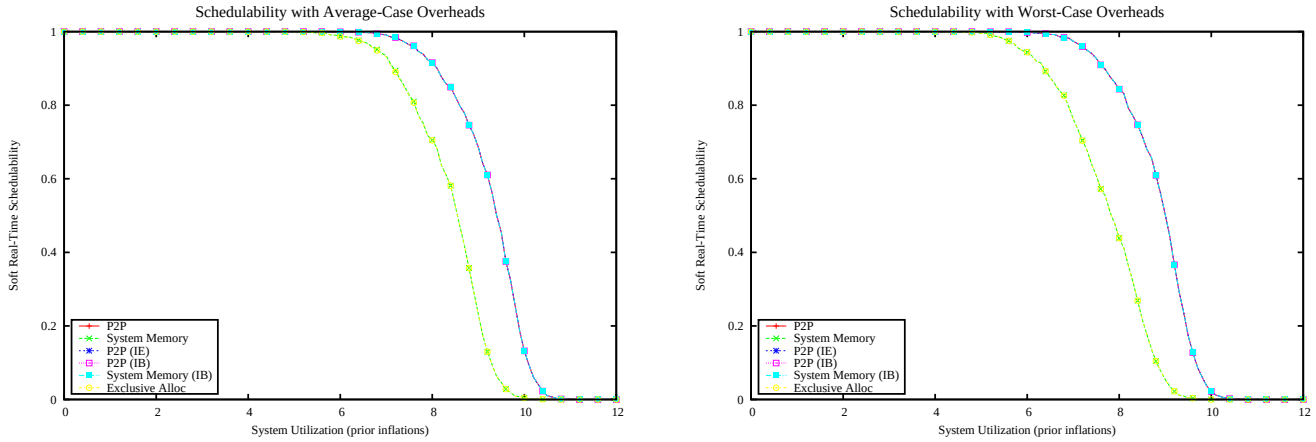

Figure 2856: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

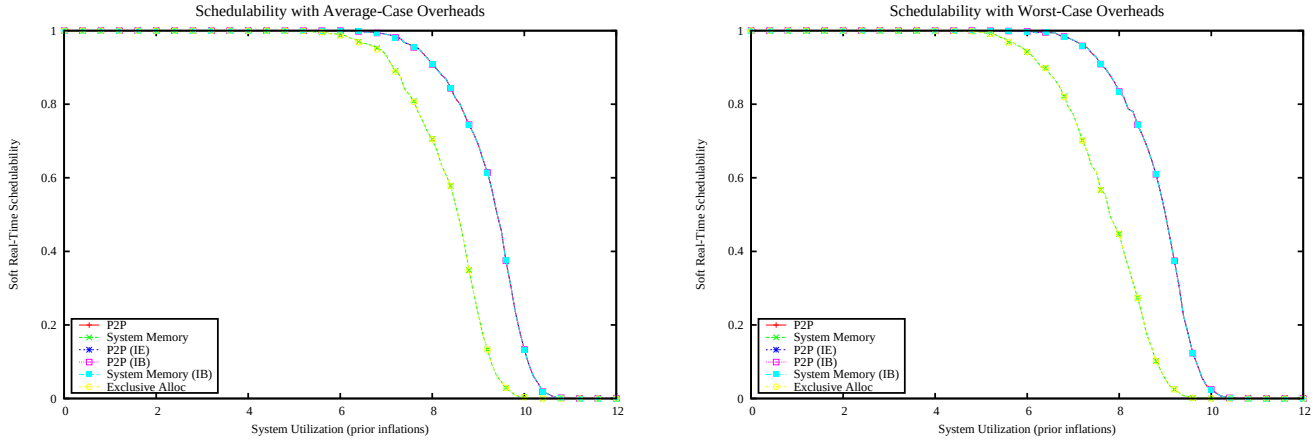

Figure 2857: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

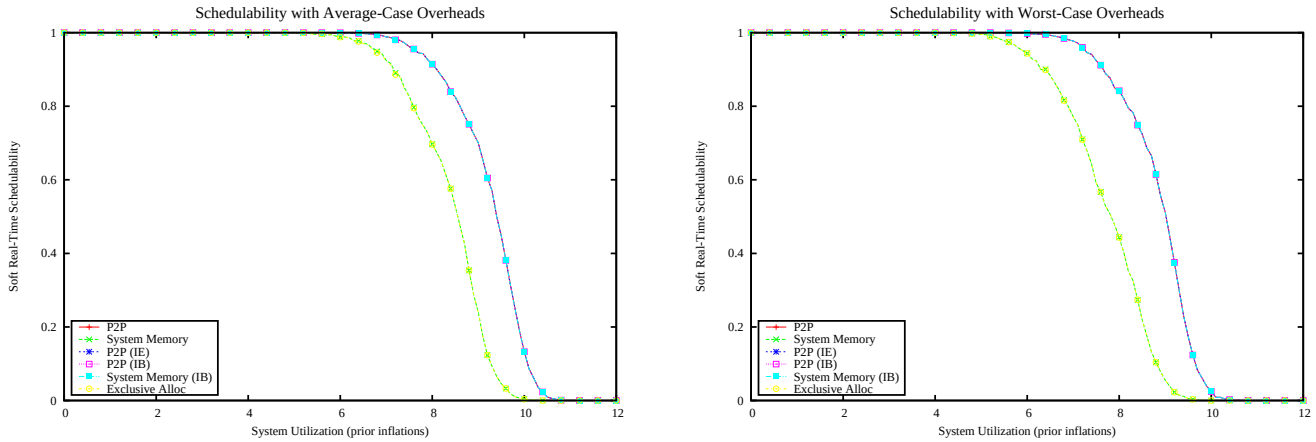

Figure 2858: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

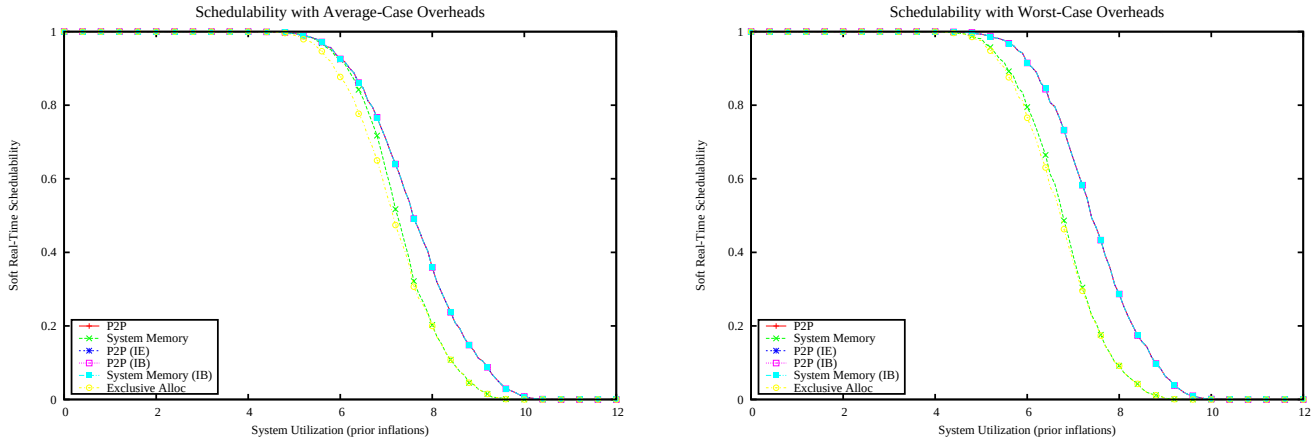

Figure 2859: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

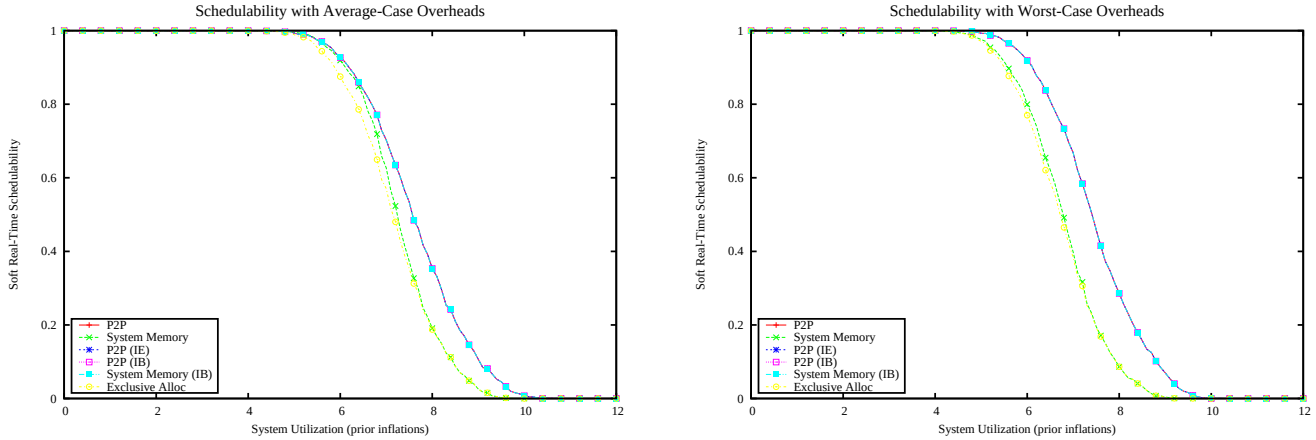

Figure 2860: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

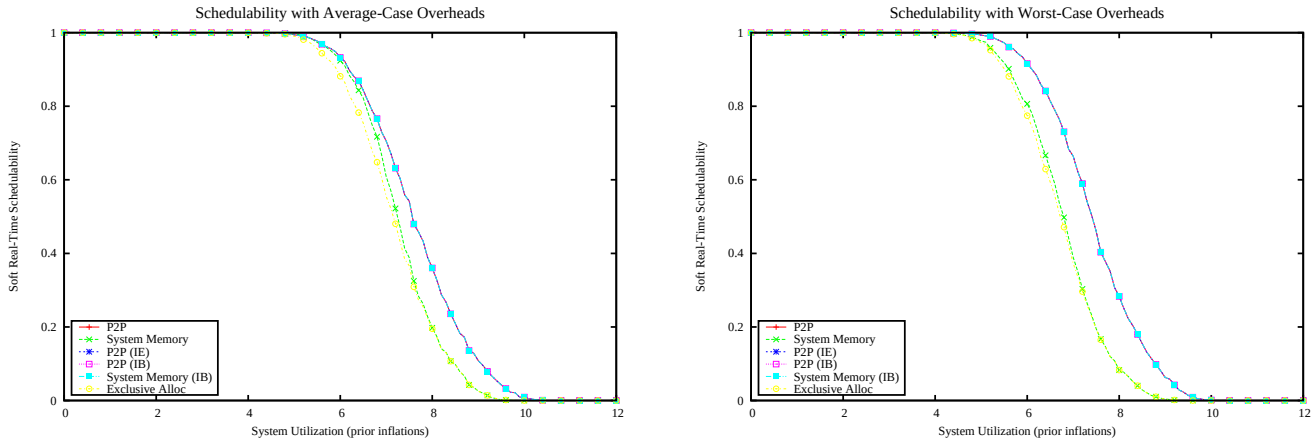

Figure 2861: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

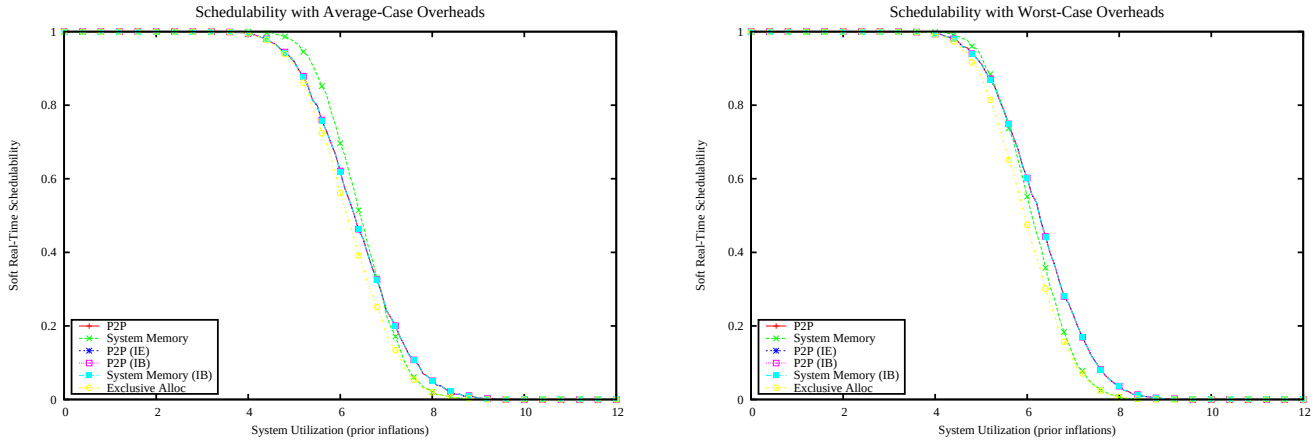

Figure 2862: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

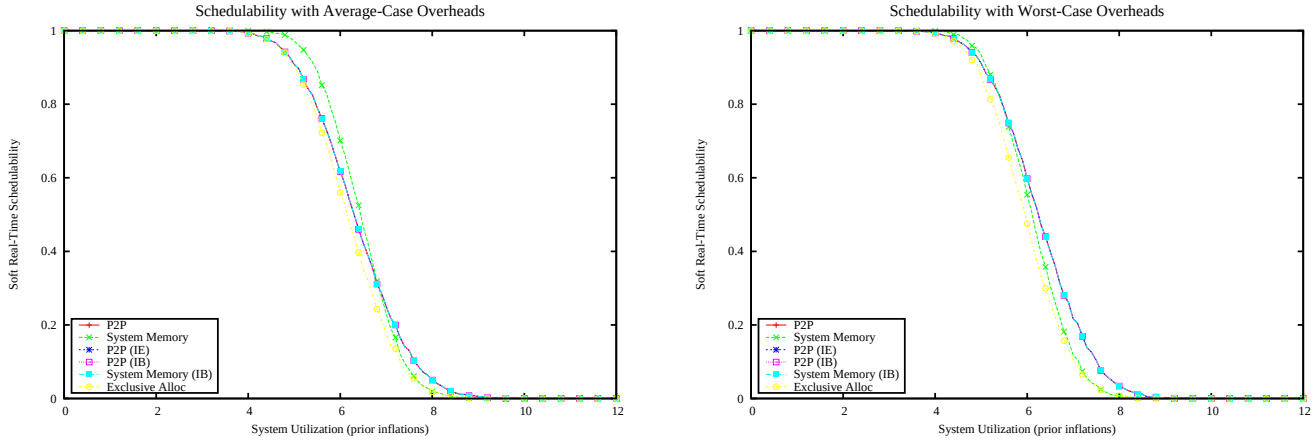

Figure 2863: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

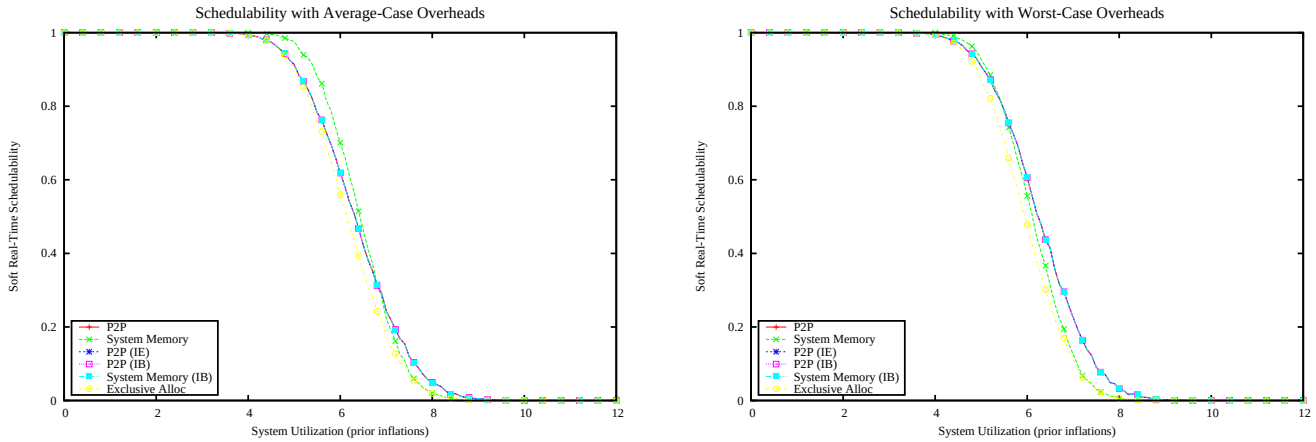

Figure 2864: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

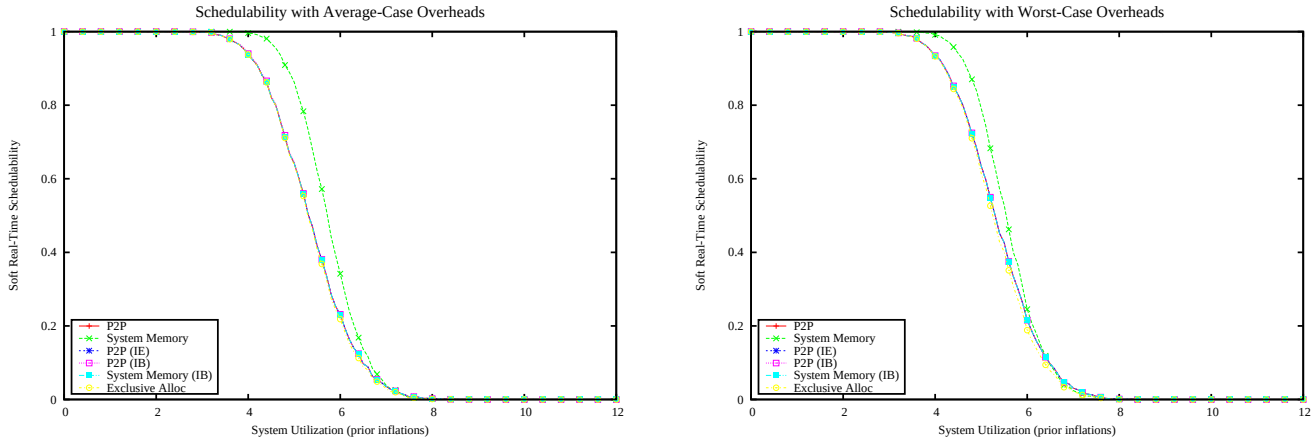

Figure 2865: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

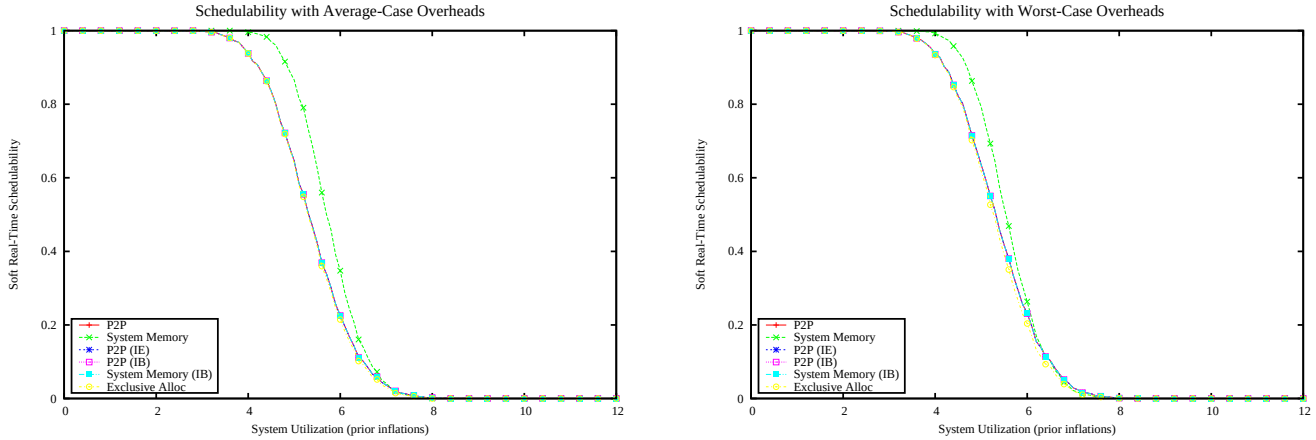

Figure 2866: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

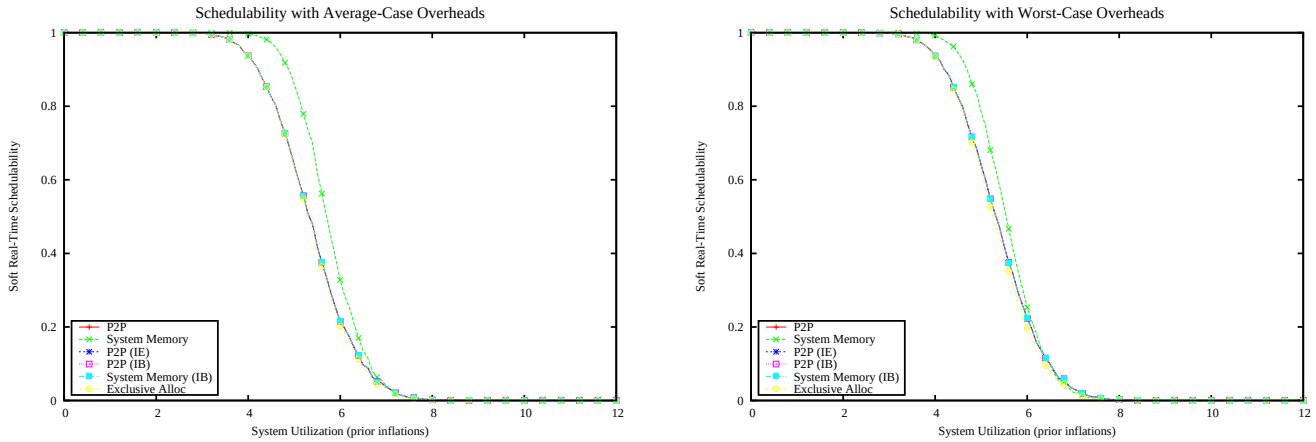

Figure 2867: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

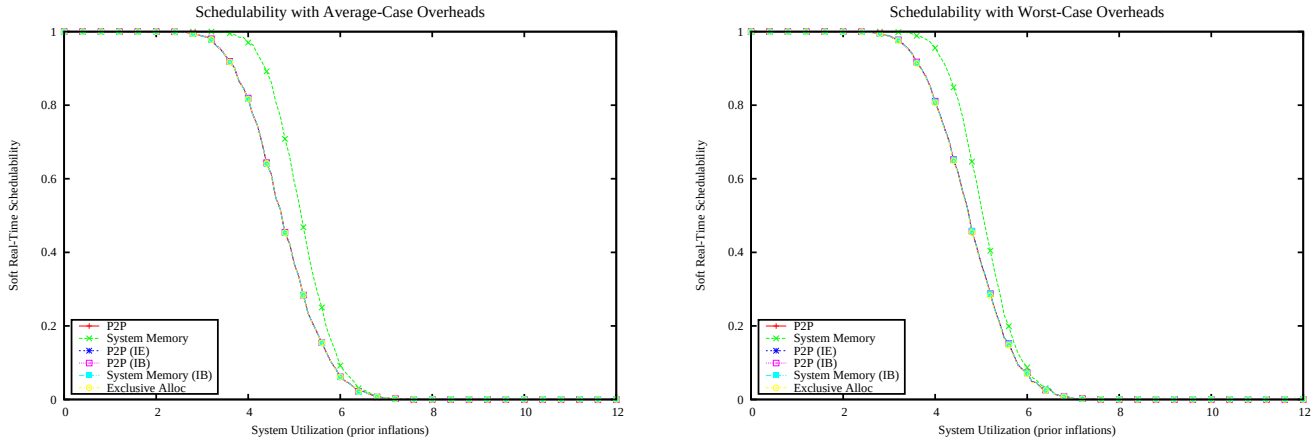

Figure 2868: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

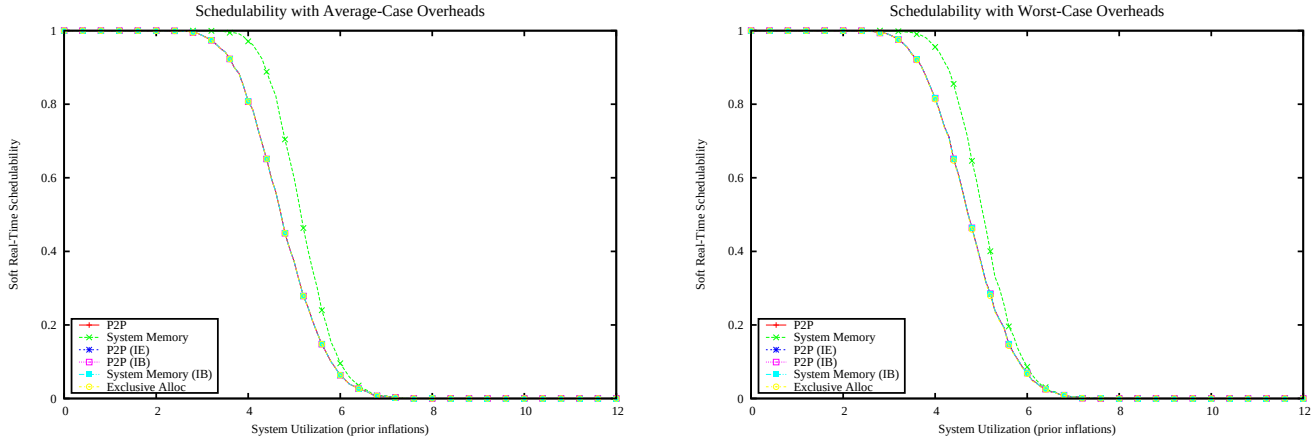

Figure 2869: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

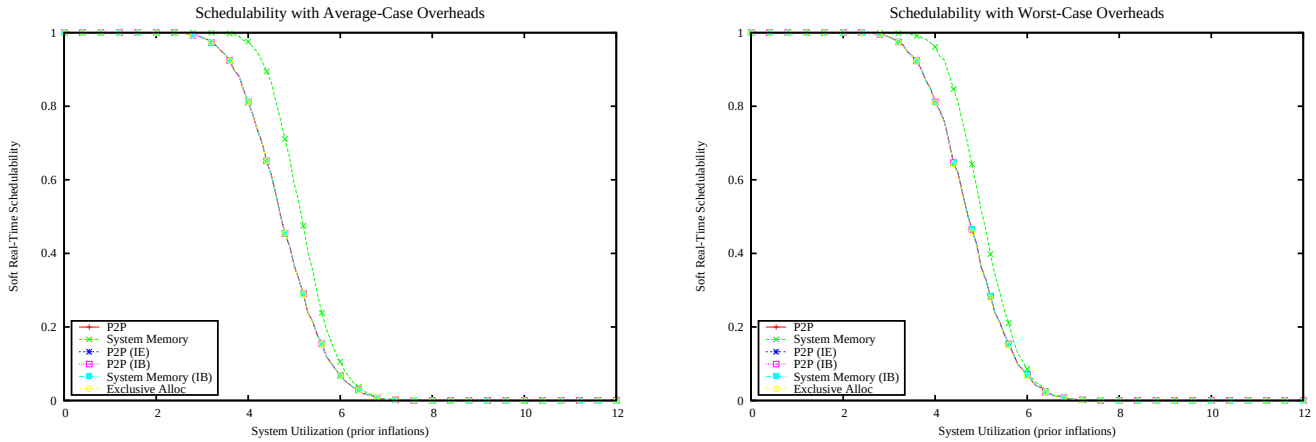

Figure 2870: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

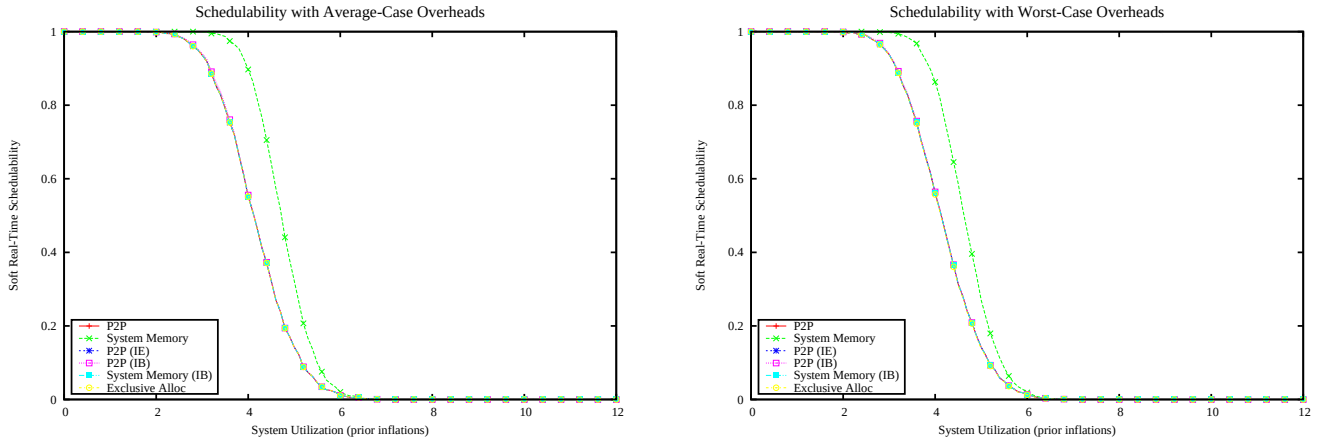

Figure 2871: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

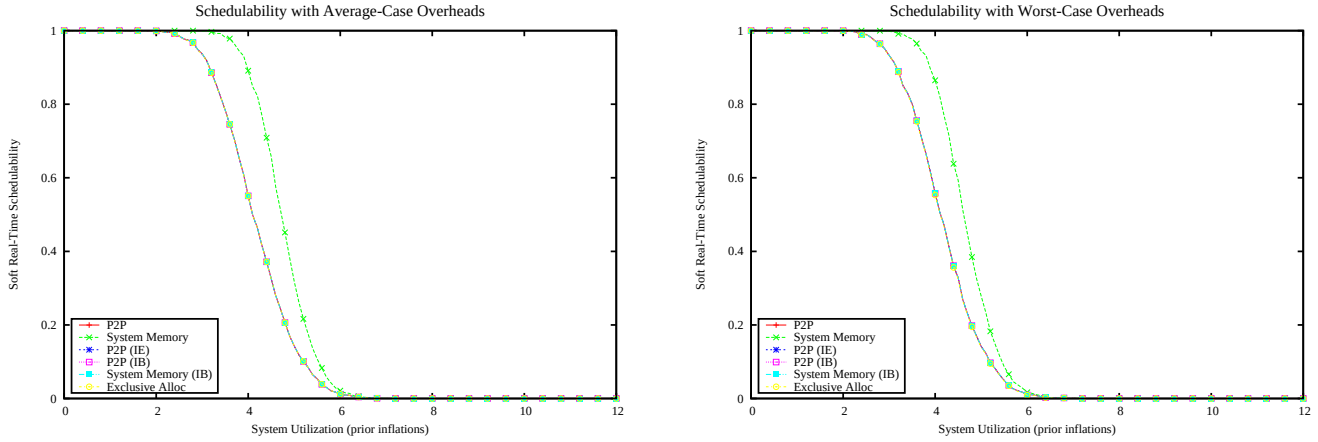

Figure 2872: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

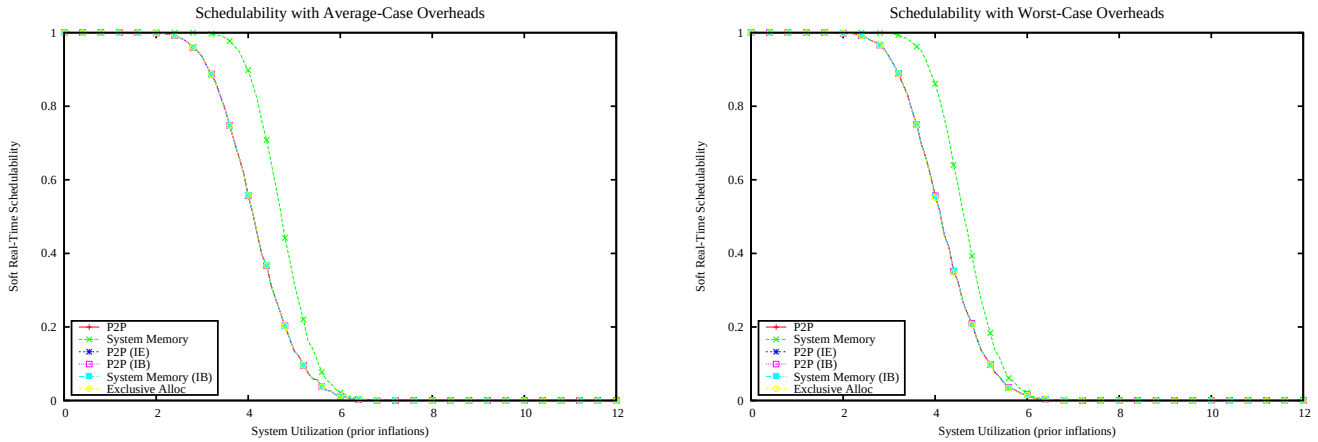

Figure 2873: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

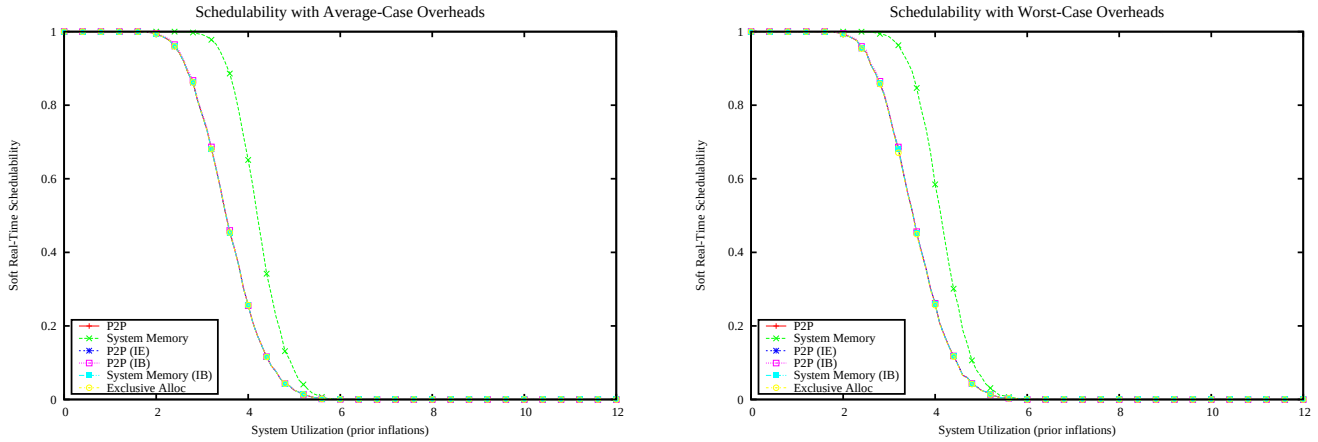

Figure 2874: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

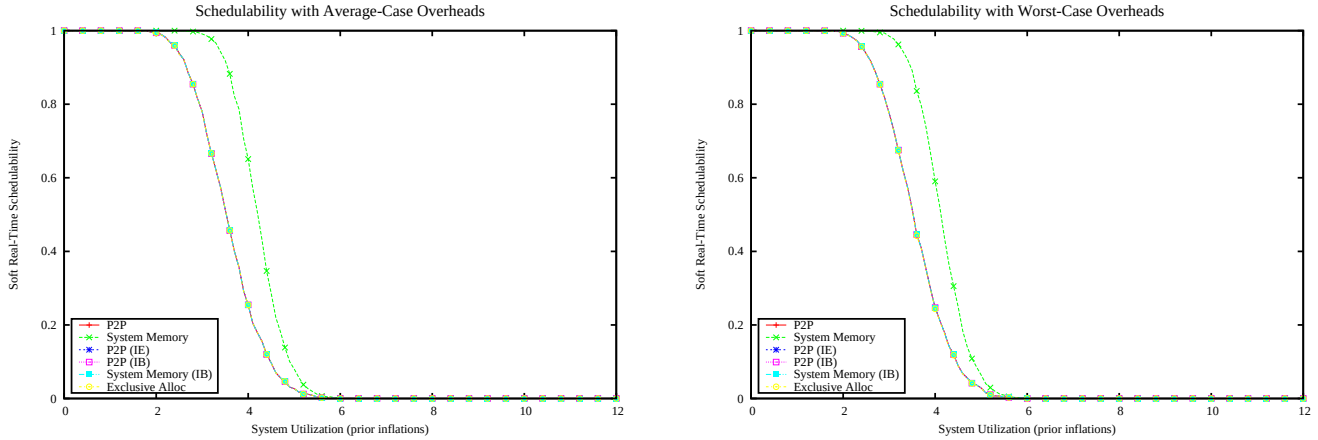

Figure 2875: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

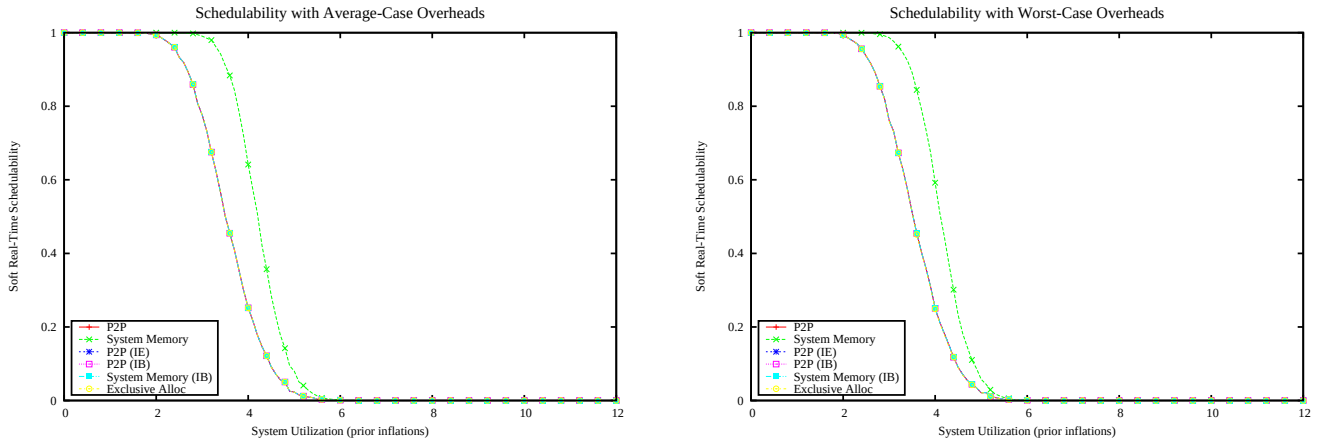

Figure 2876: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

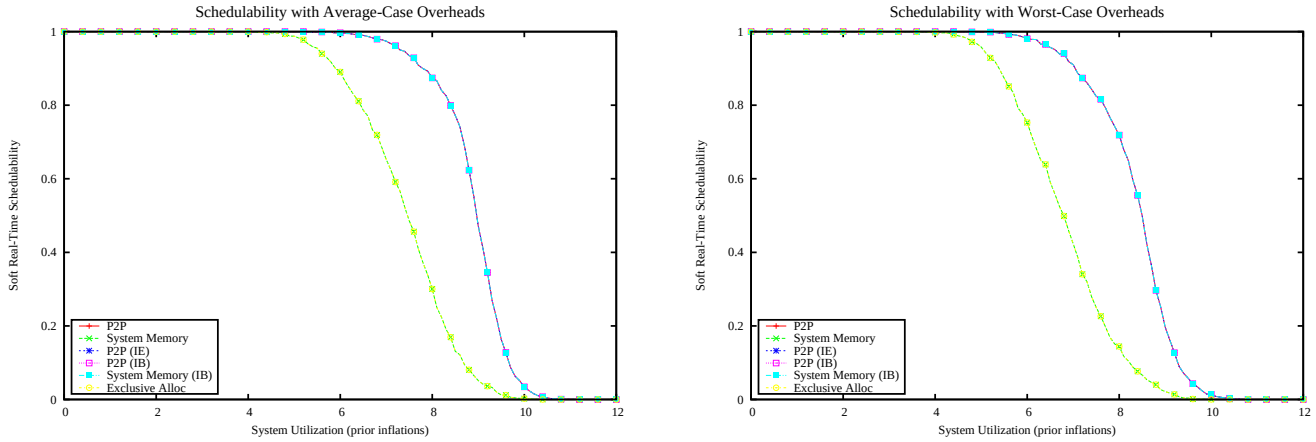

Figure 2877: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

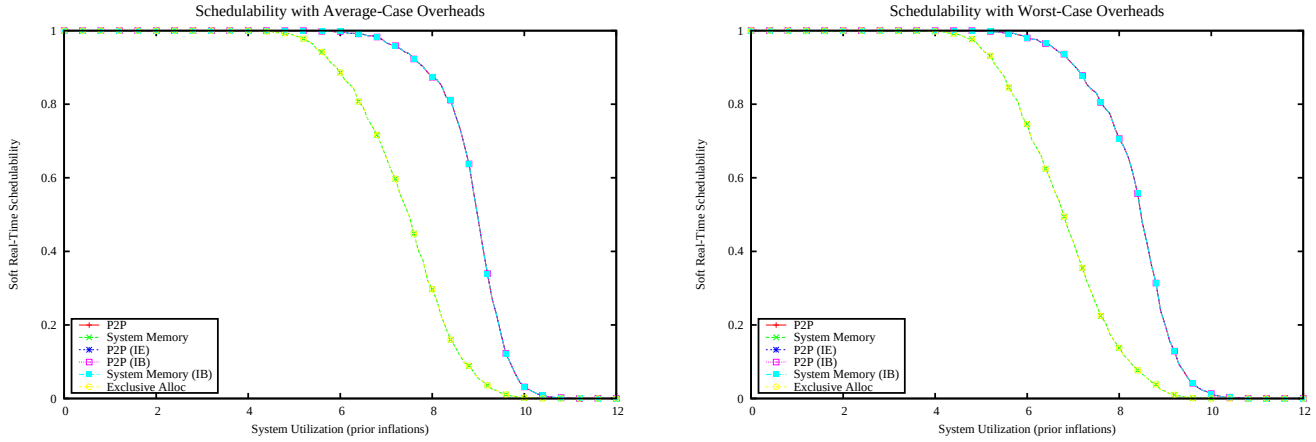

Figure 2878: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

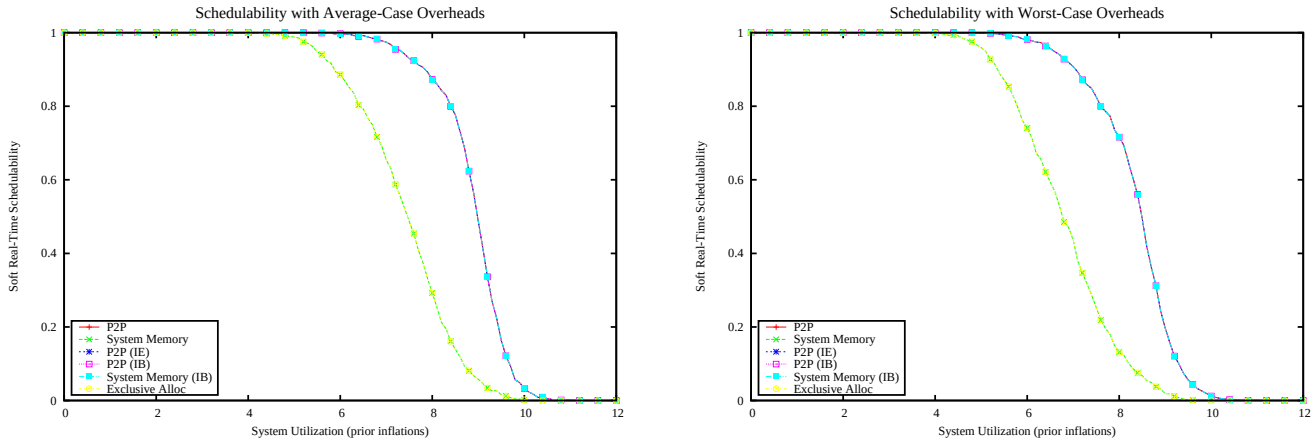

Figure 2879: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

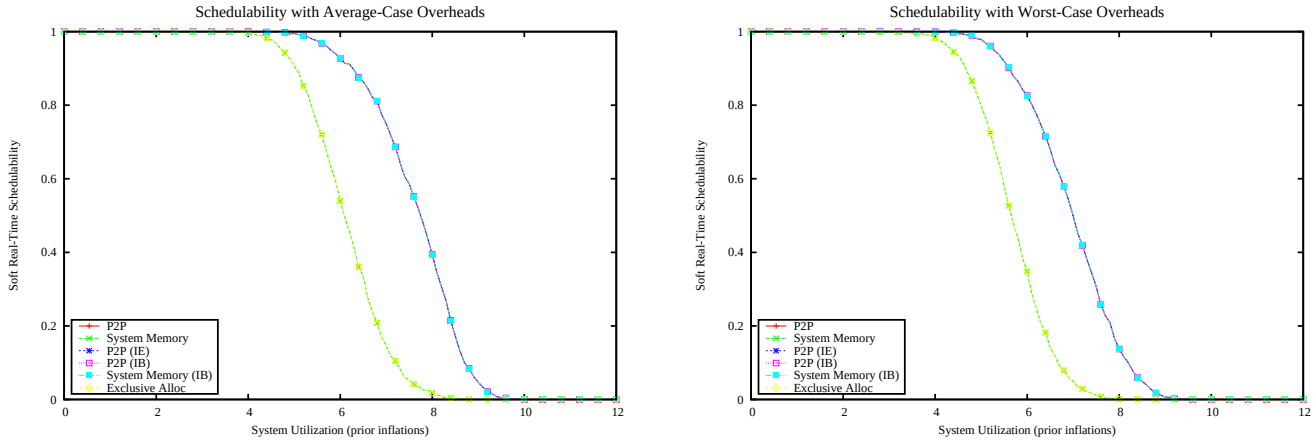

Figure 2880: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

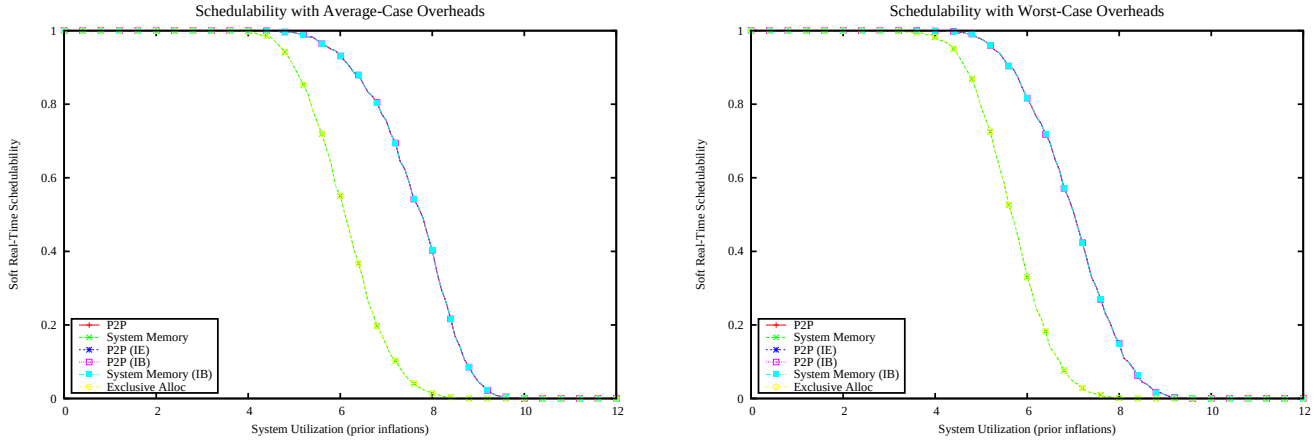

Figure 2881: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

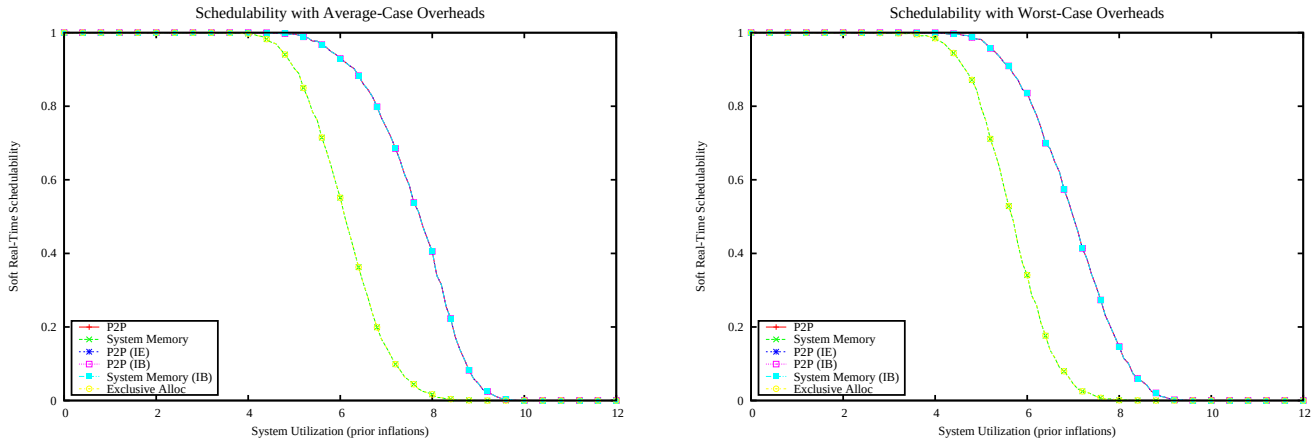

Figure 2882: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

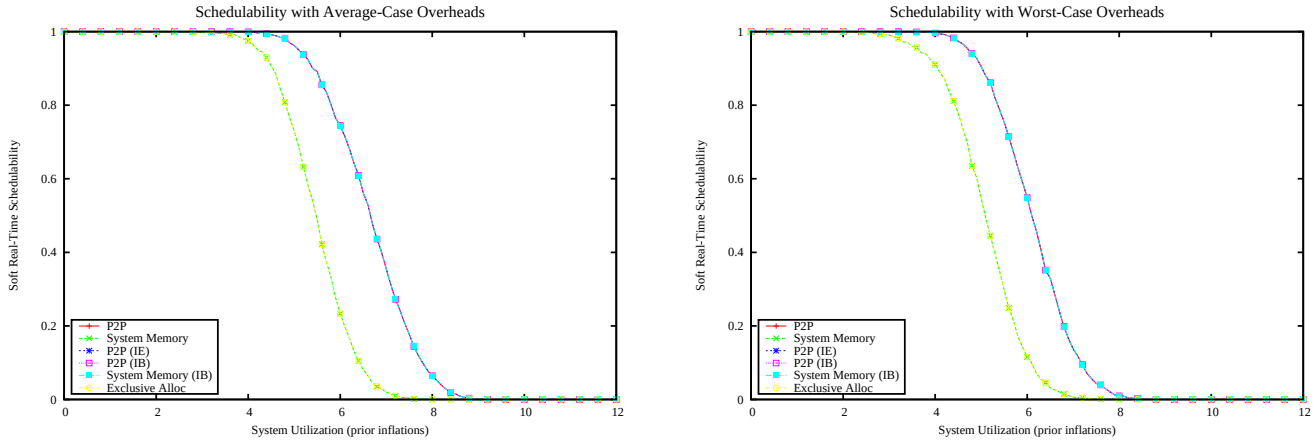

Figure 2883: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

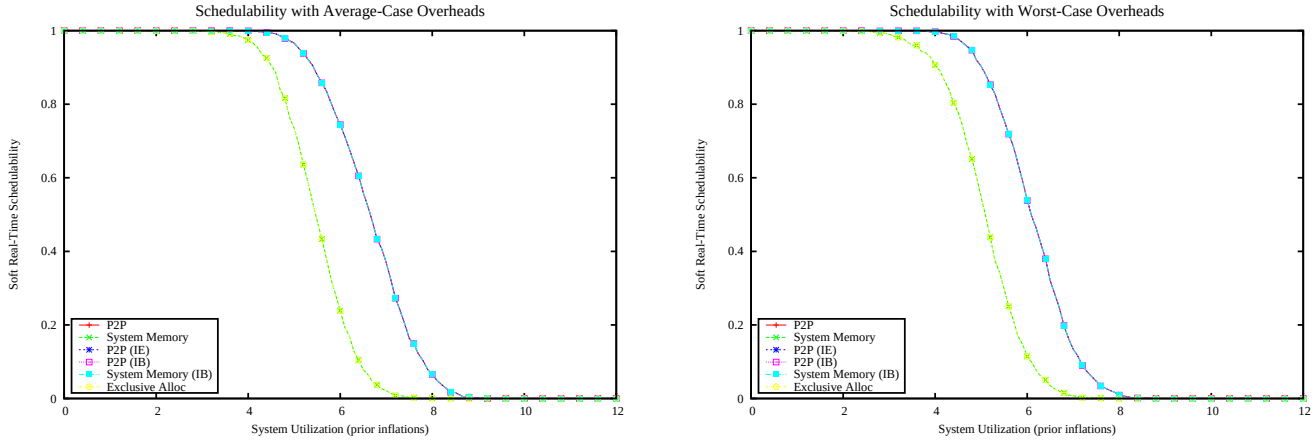

Figure 2884: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

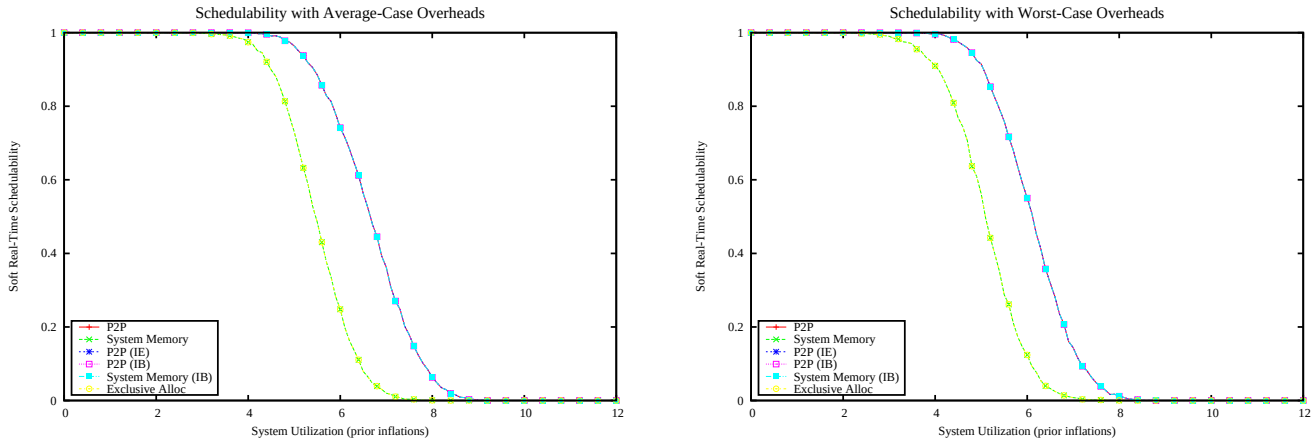

Figure 2885: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

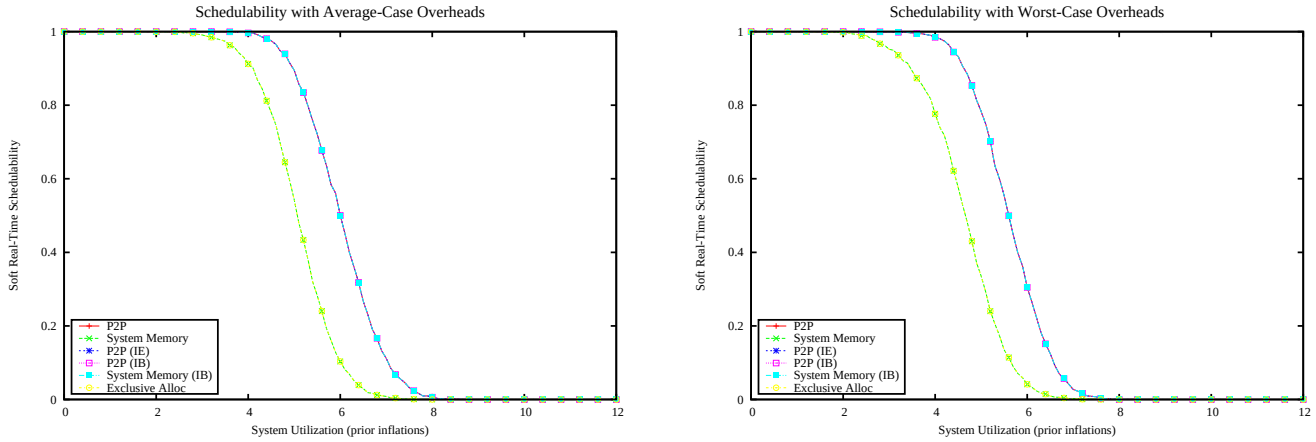

Figure 2886: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

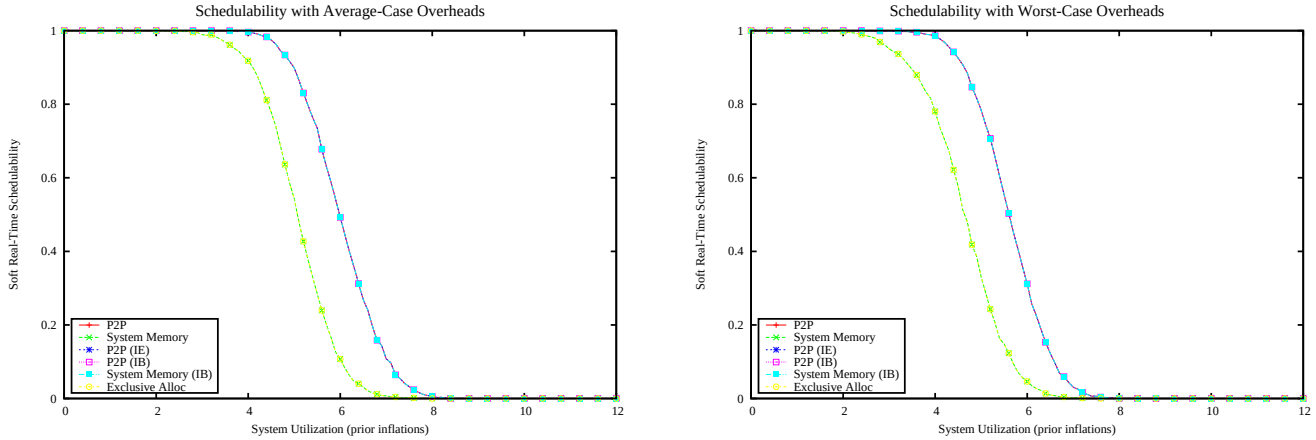

Figure 2887: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

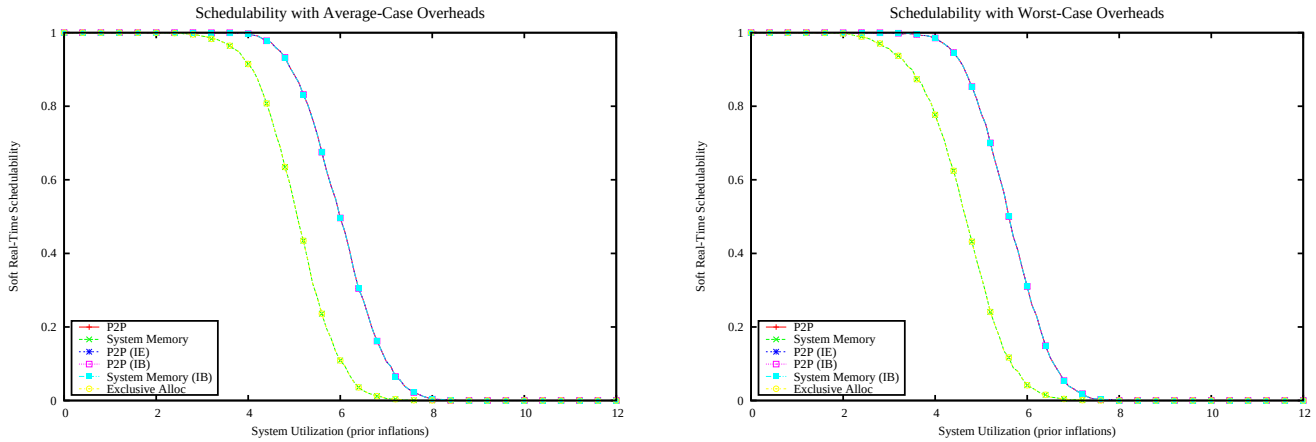

Figure 2888: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

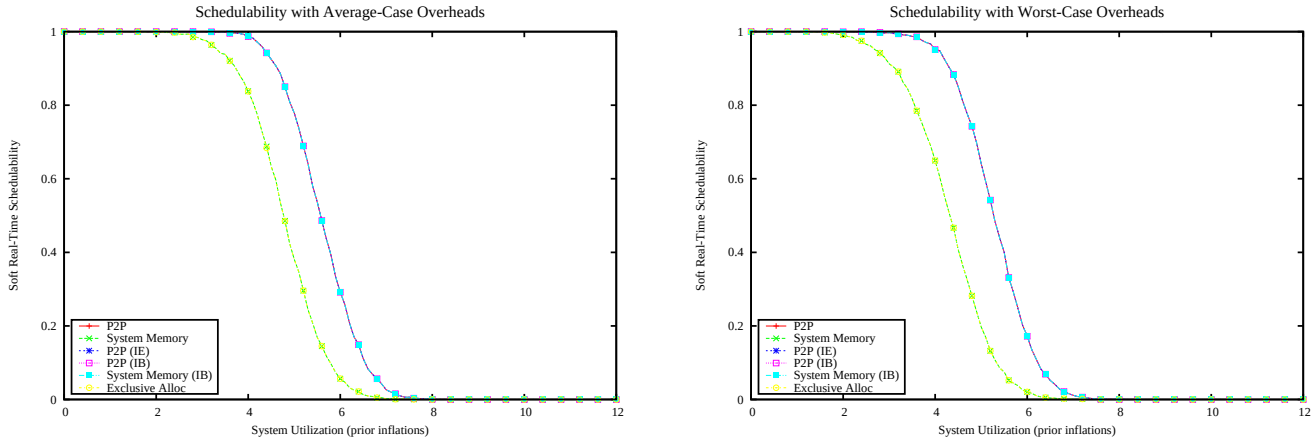

Figure 2889: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

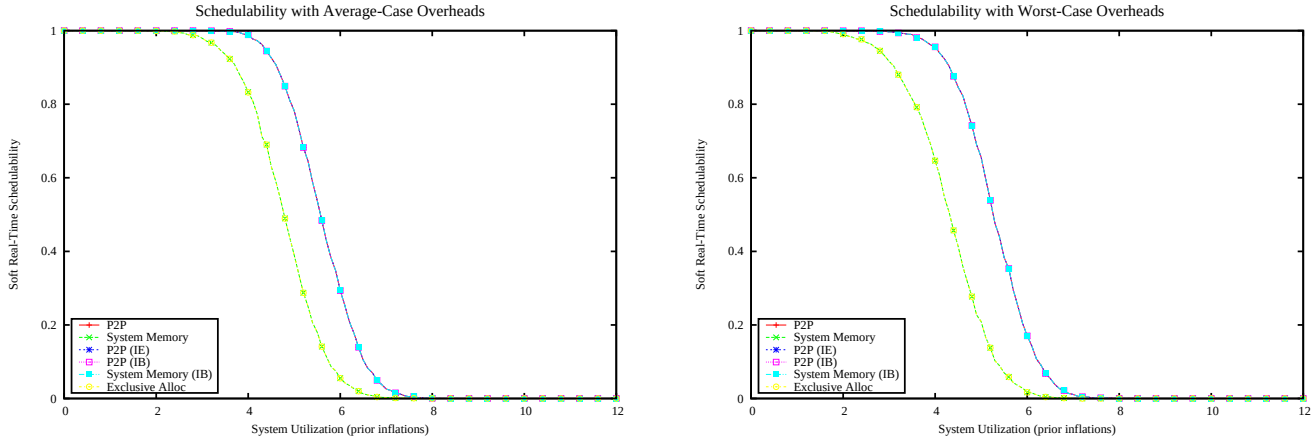

Figure 2890: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

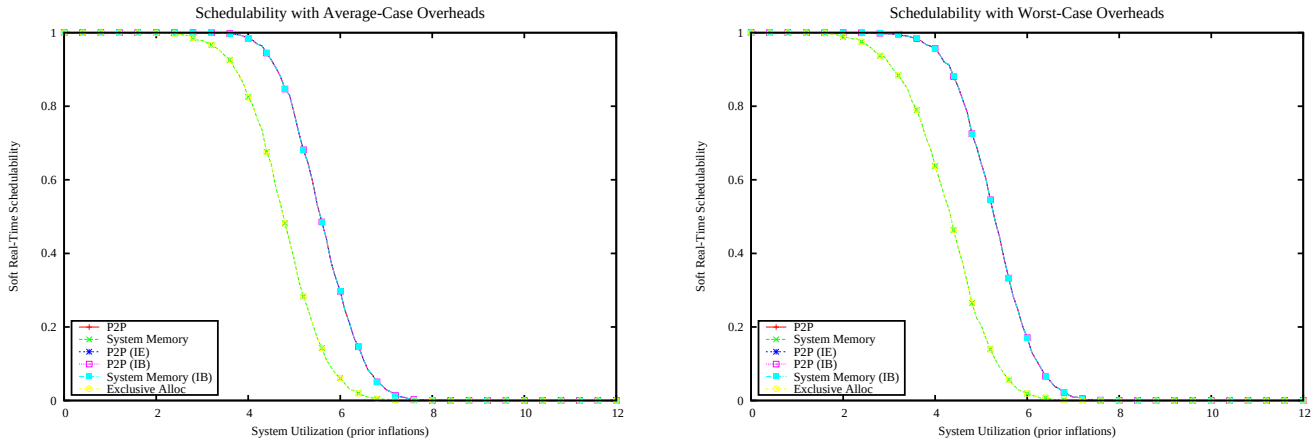

Figure 2891: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

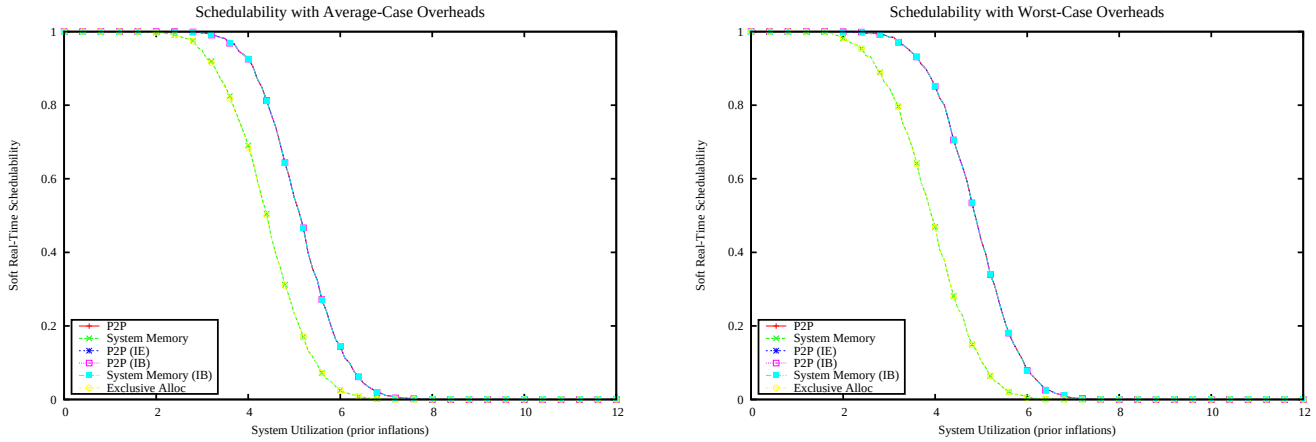

Figure 2892: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

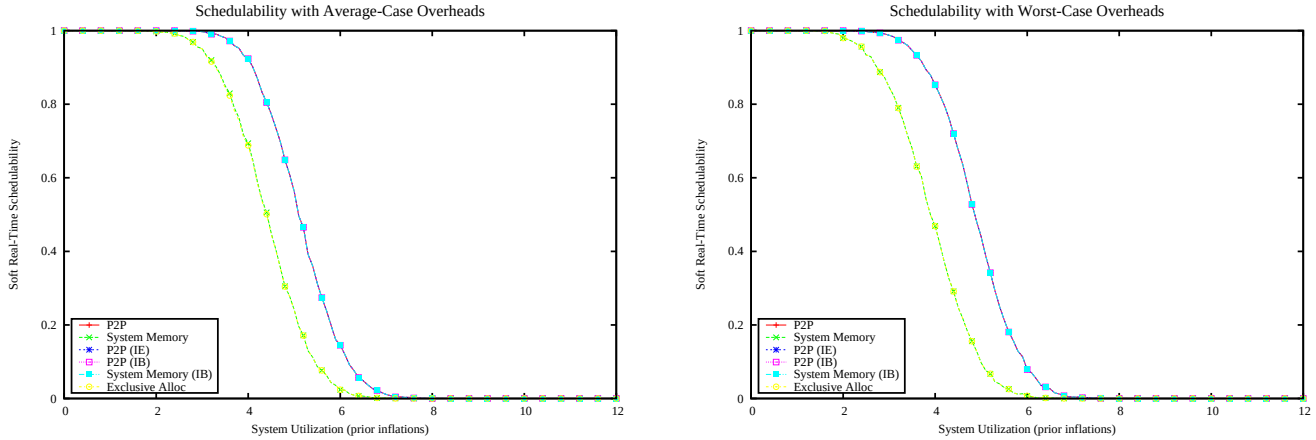

Figure 2893: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

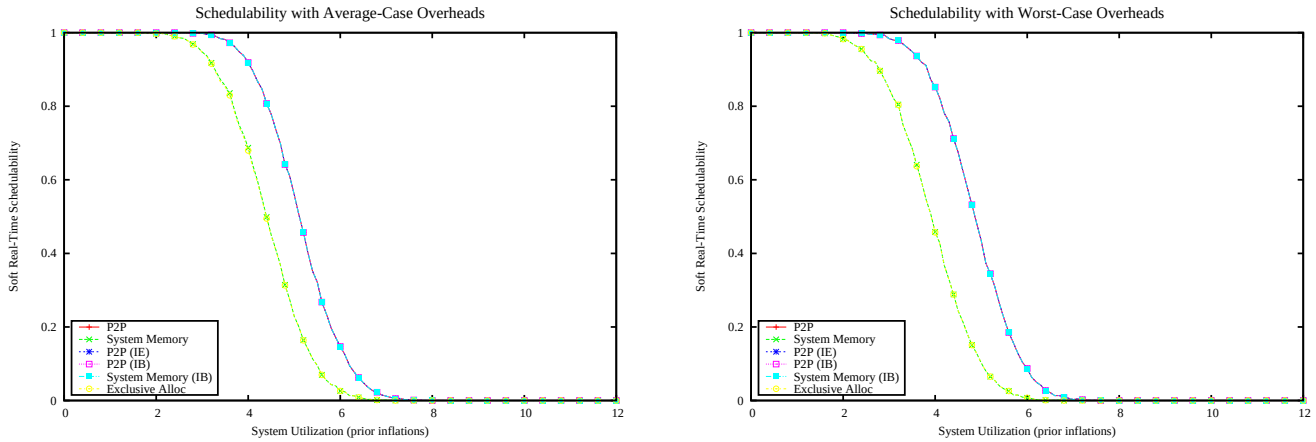

Figure 2894: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

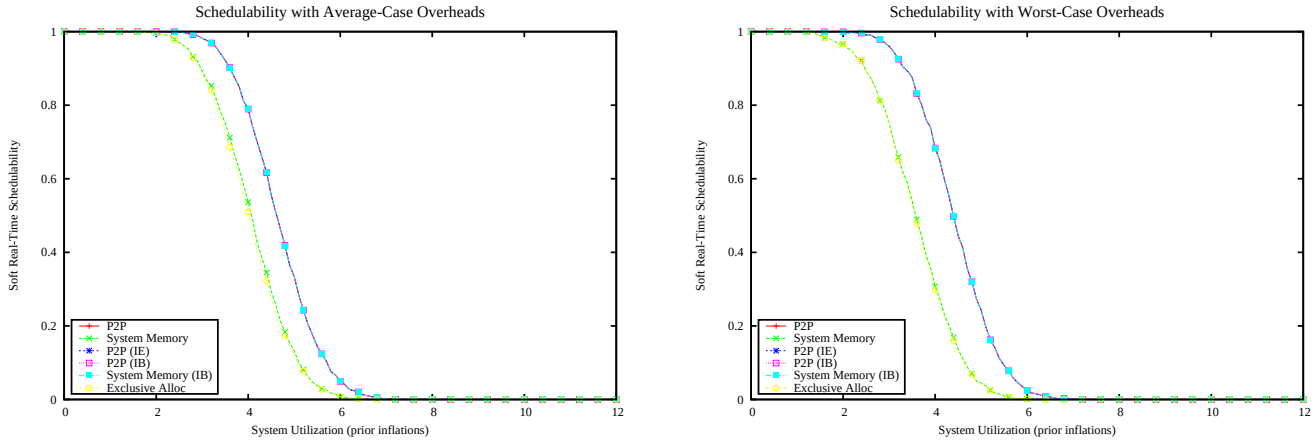

Figure 2895: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

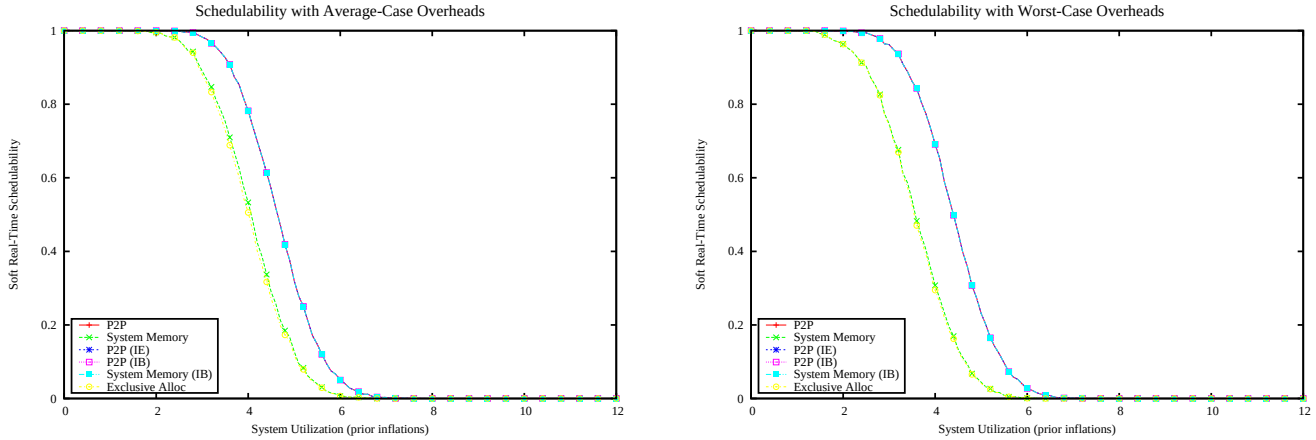

Figure 2896: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

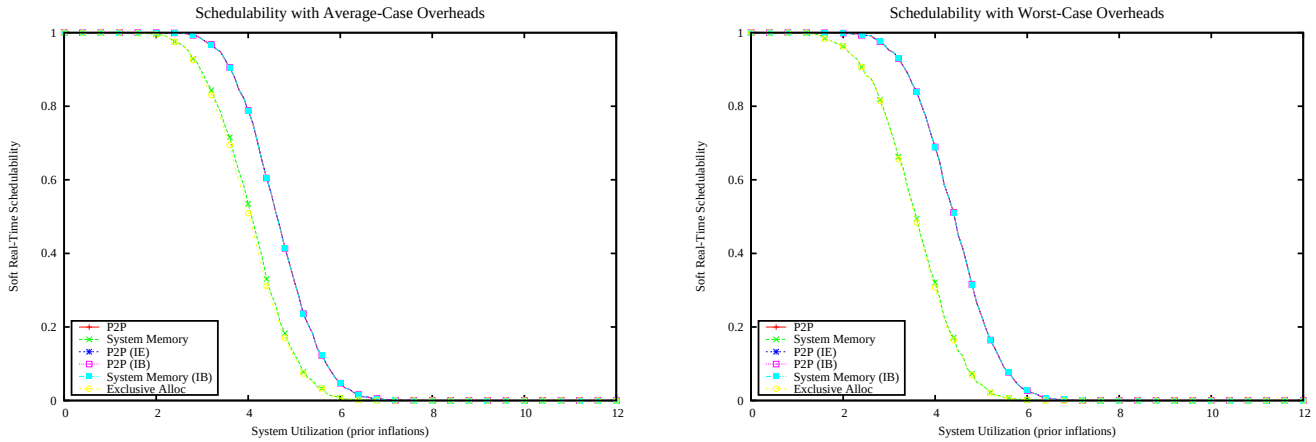

Figure 2897: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

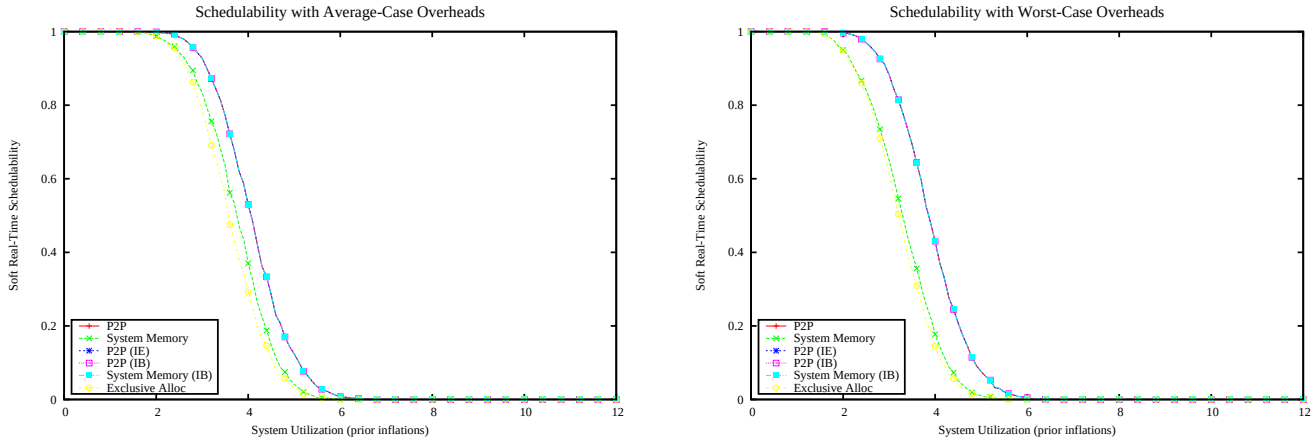

Figure 2898: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

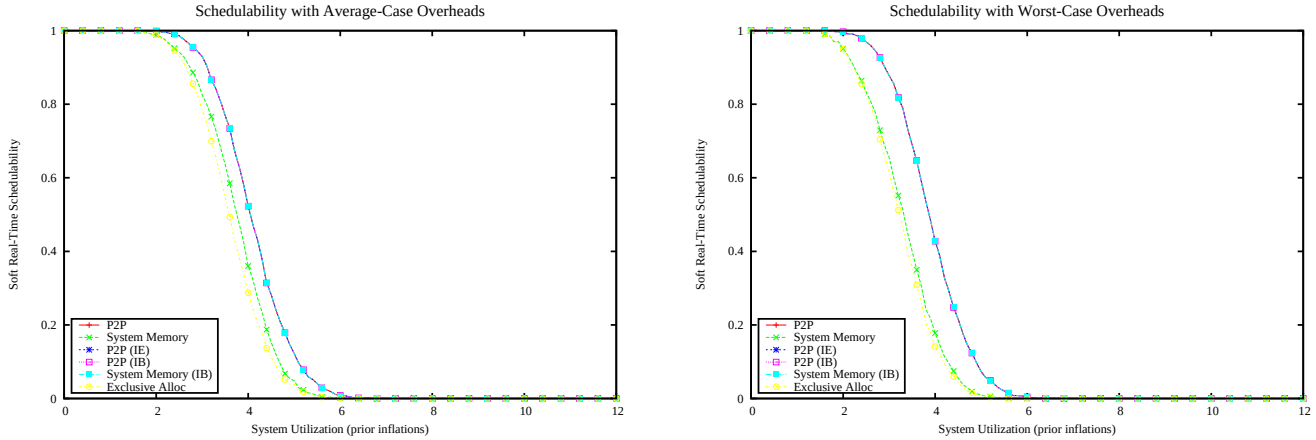

Figure 2899: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

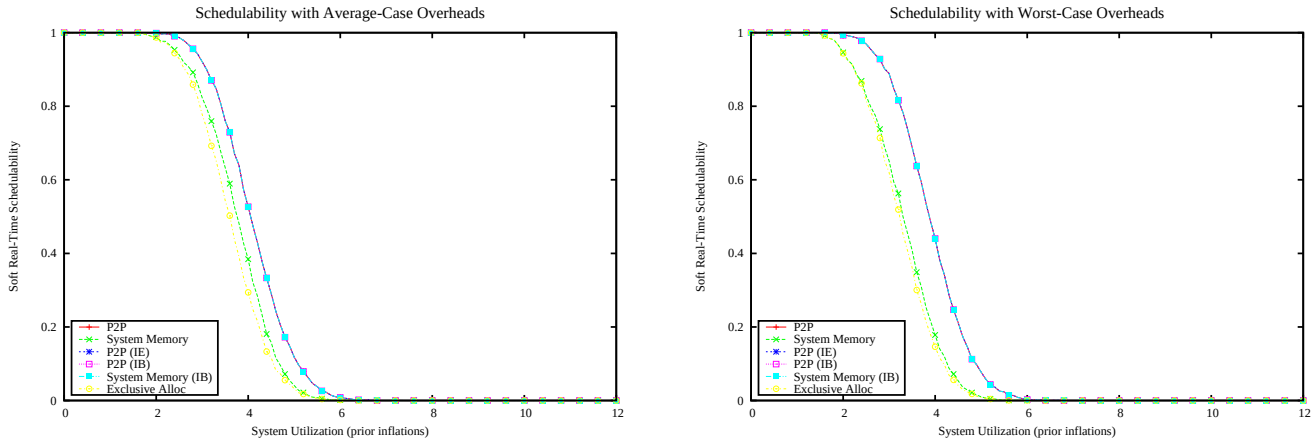

Figure 2900: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

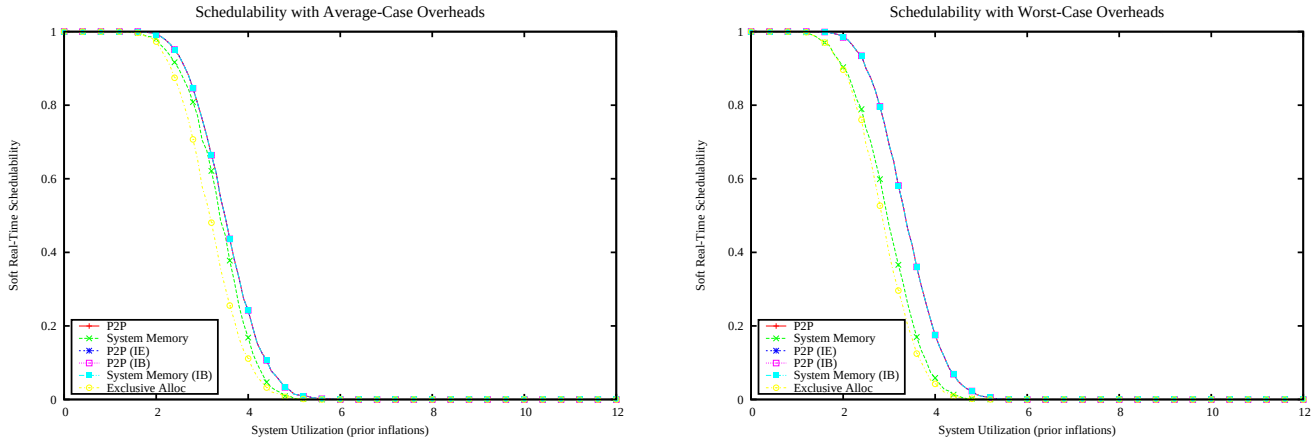

Figure 2901: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

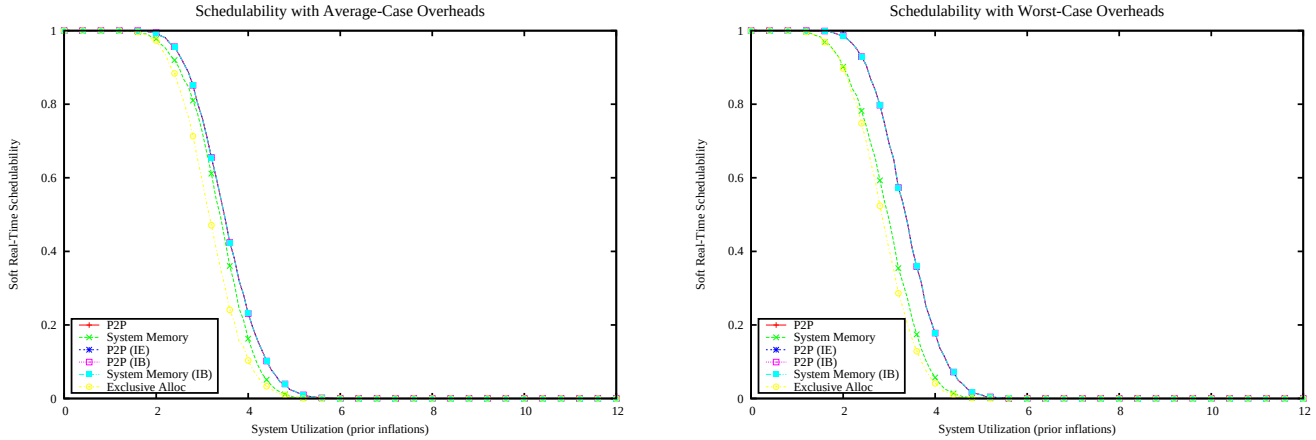

Figure 2902: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

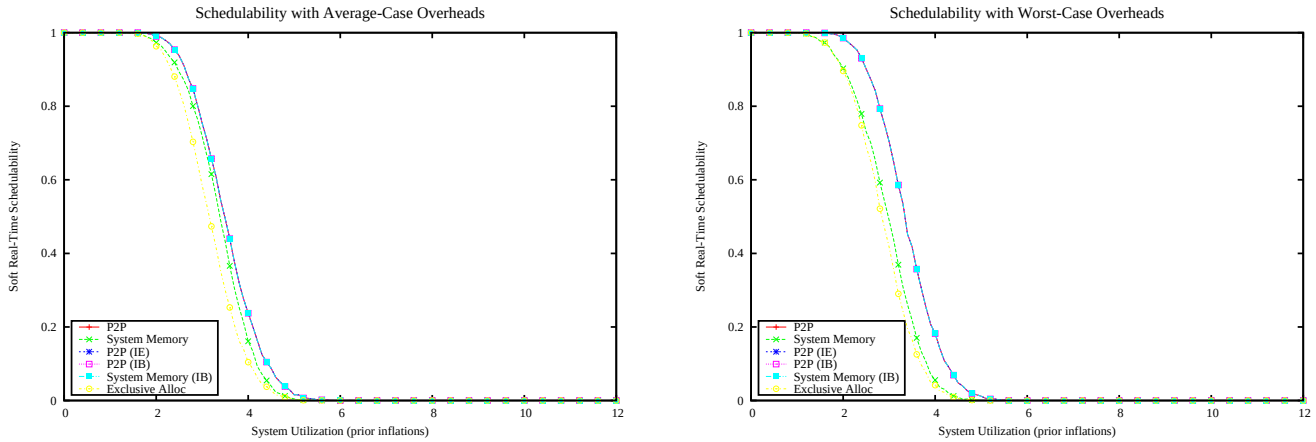

Figure 2903: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

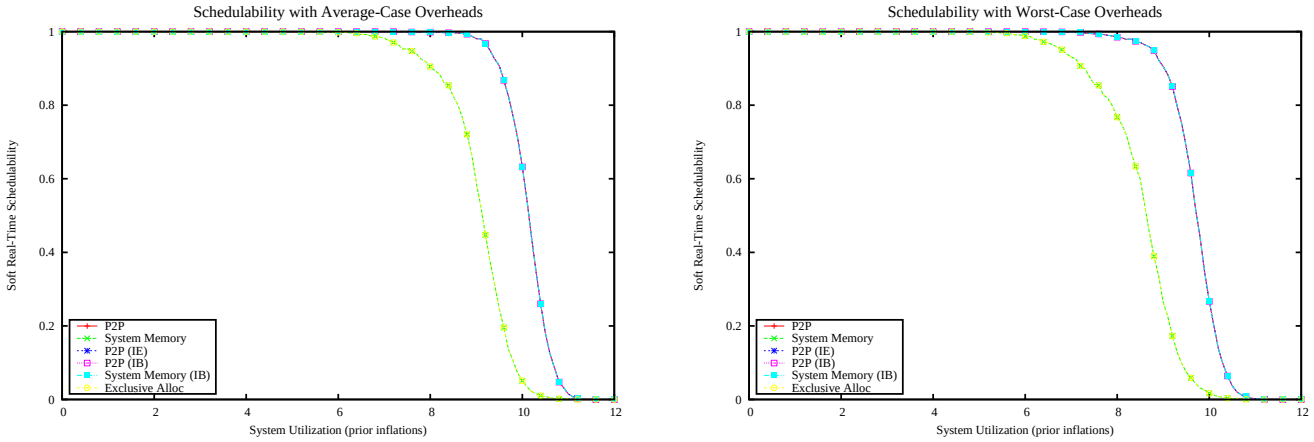

Figure 2904: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

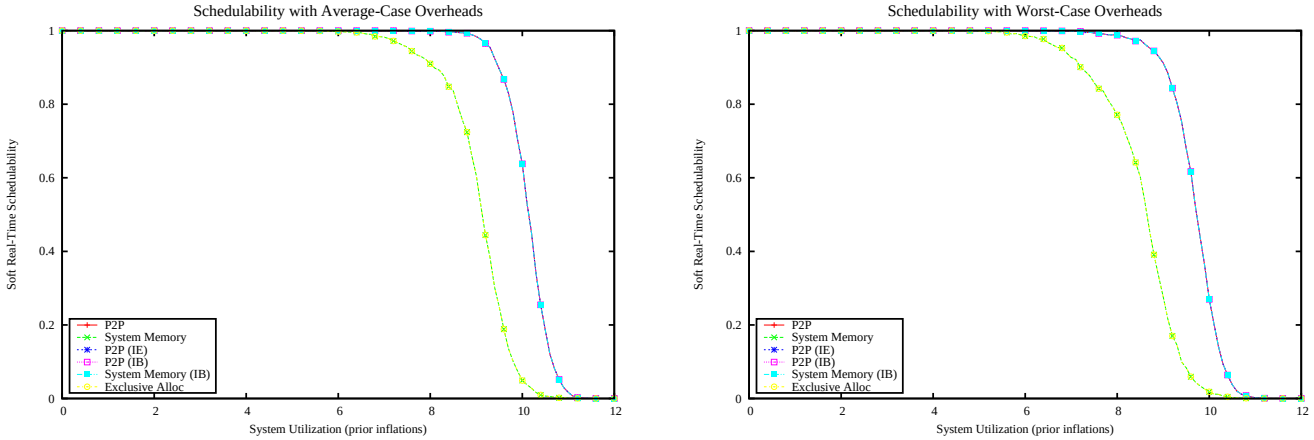

Figure 2905: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

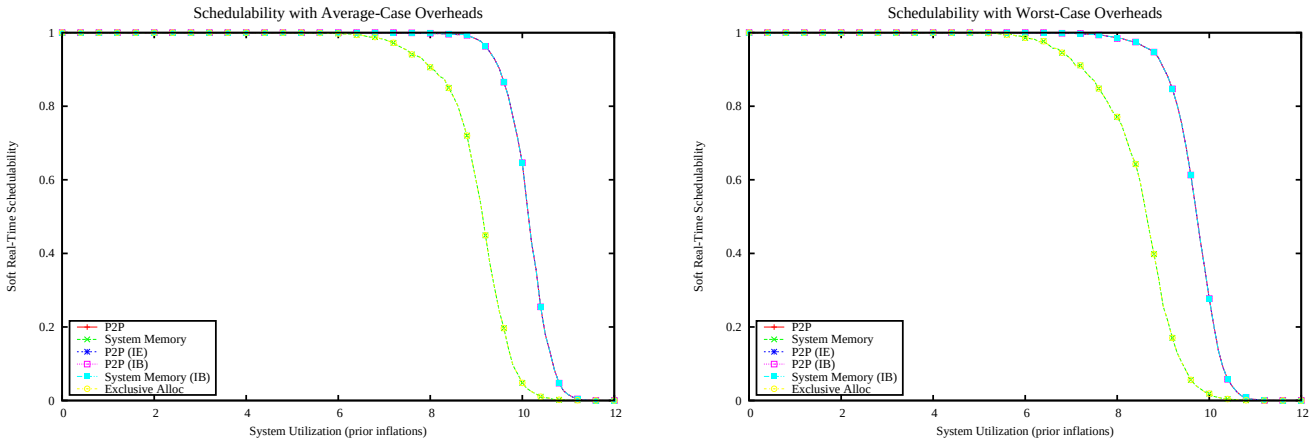

Figure 2906: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

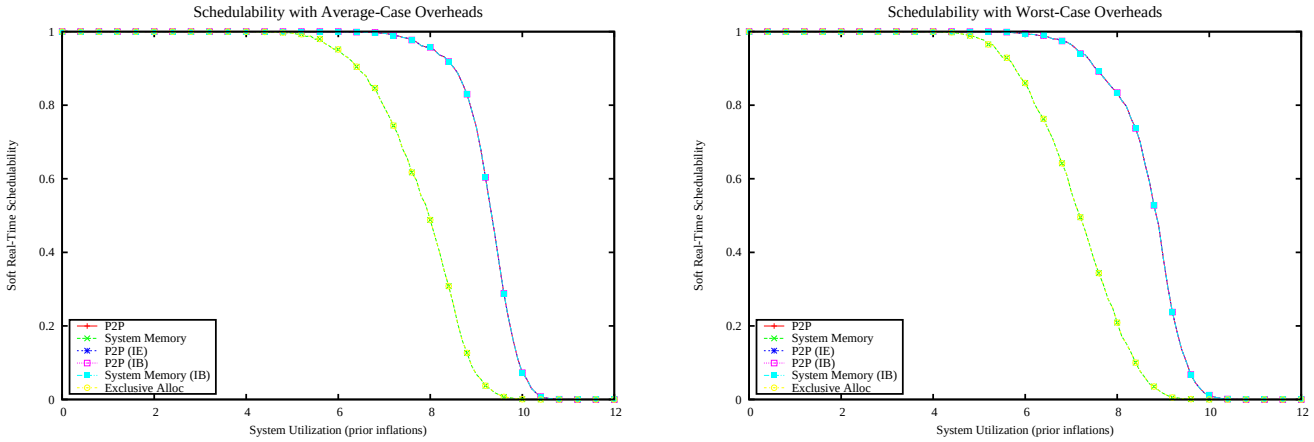

Figure 2907: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

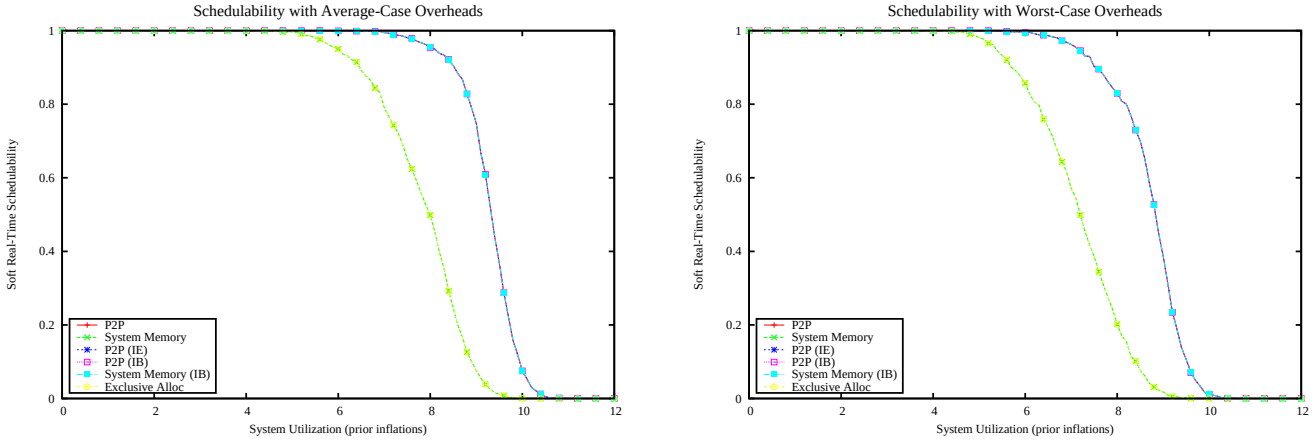

Figure 2908: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

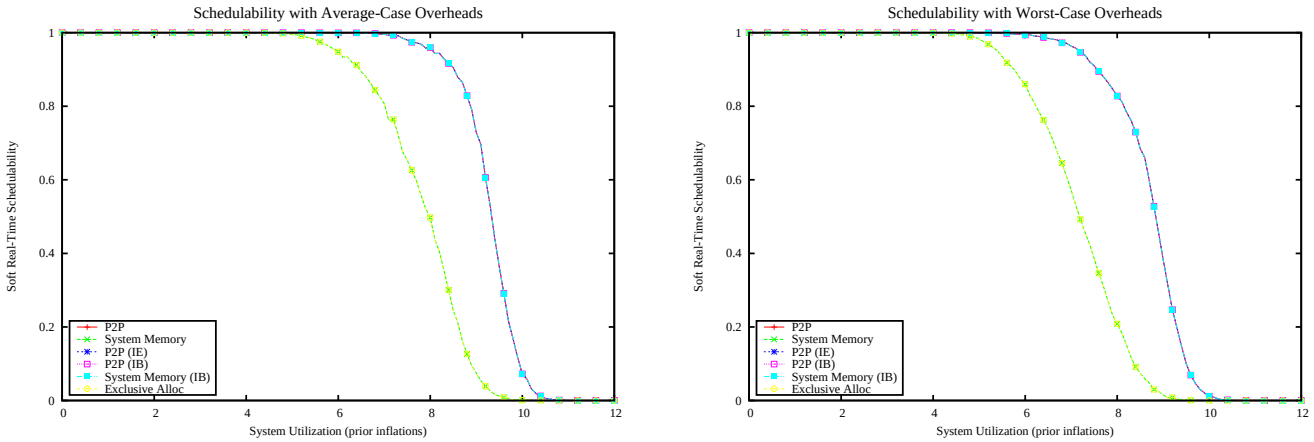

Figure 2909: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

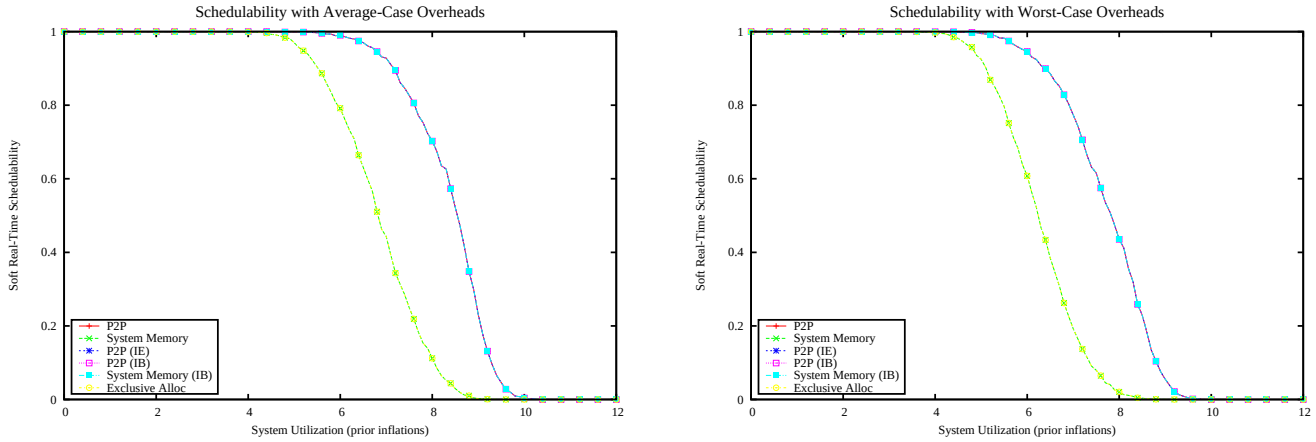

Figure 2910: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

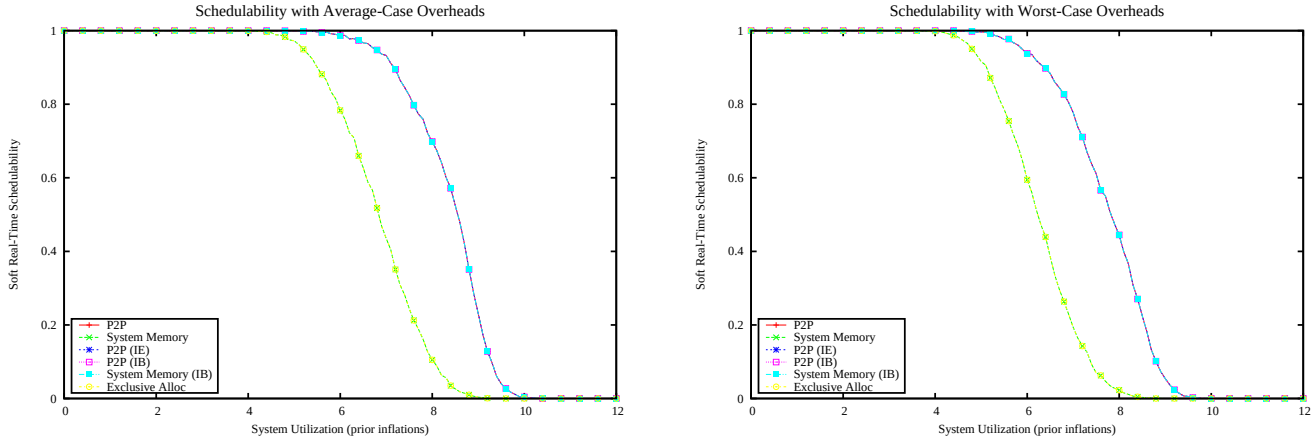

Figure 2911: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

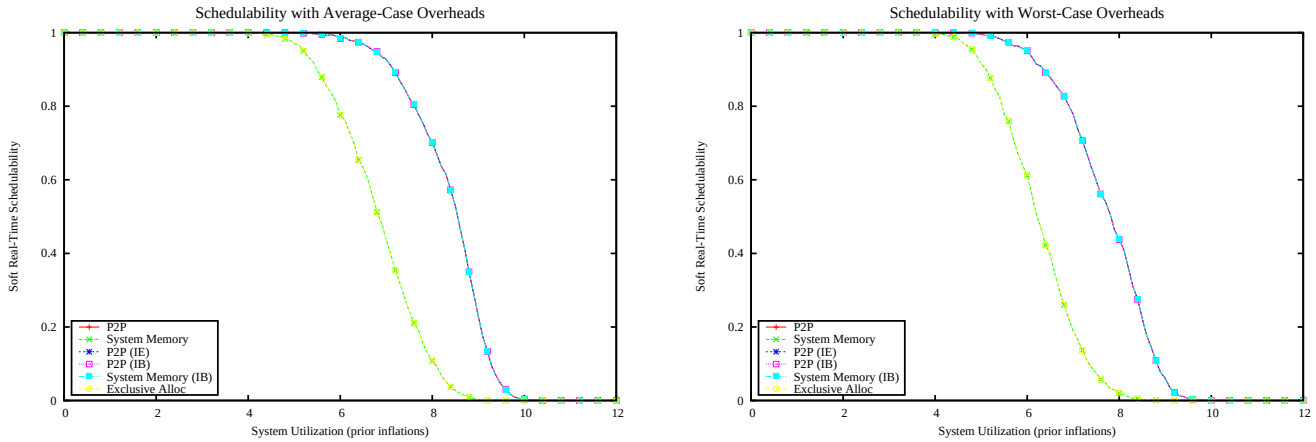

Figure 2912: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

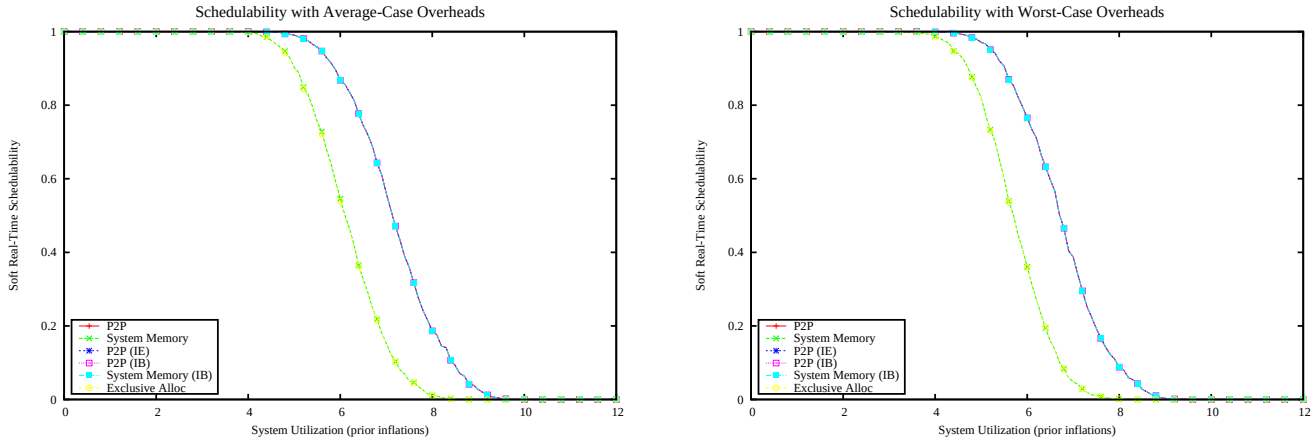

Figure 2913: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

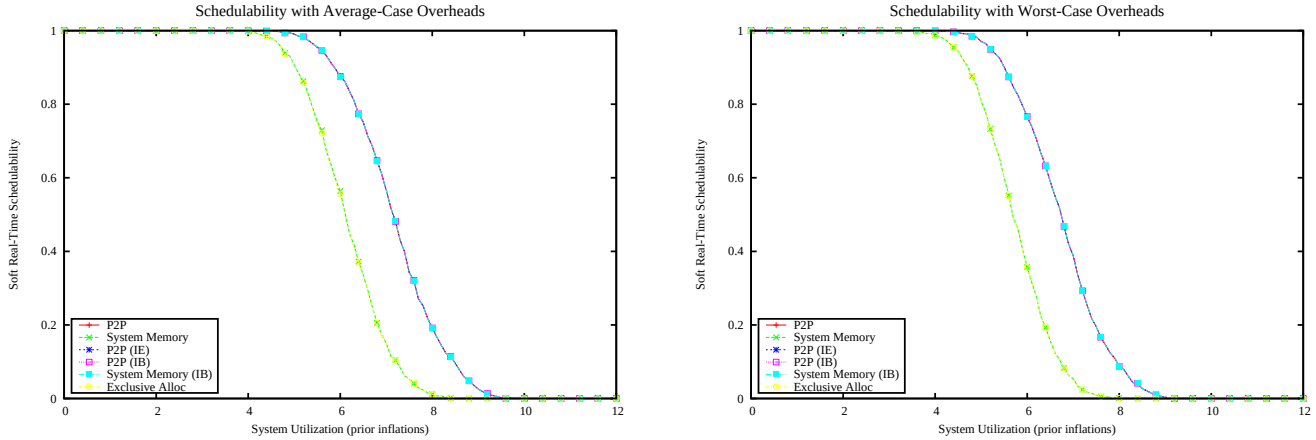

Figure 2914: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

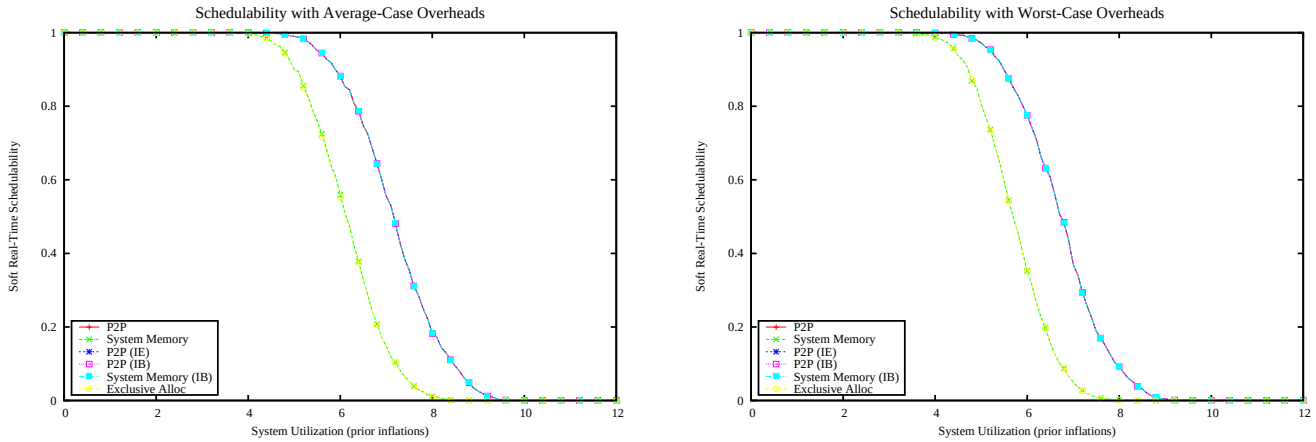

Figure 2915: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

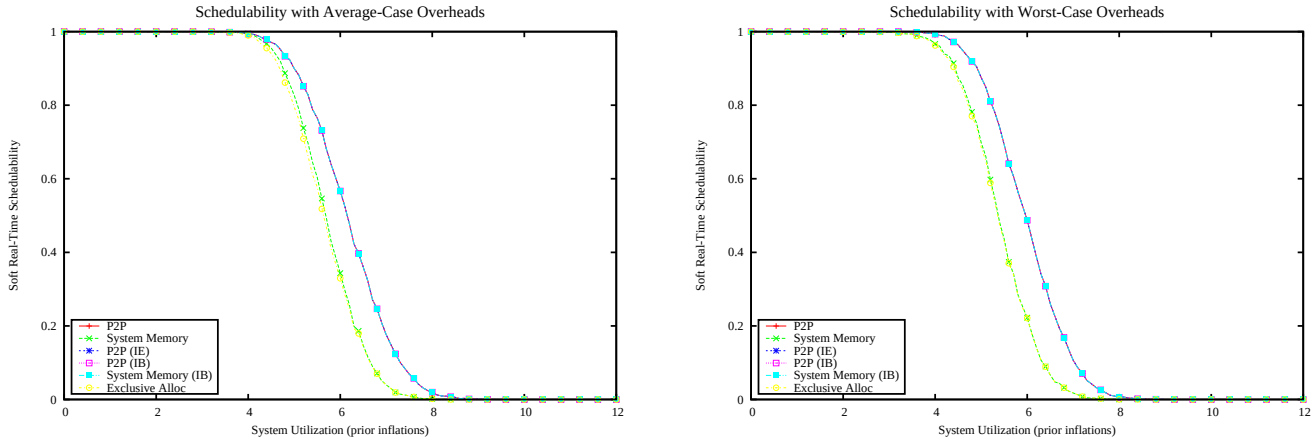

Figure 2916: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

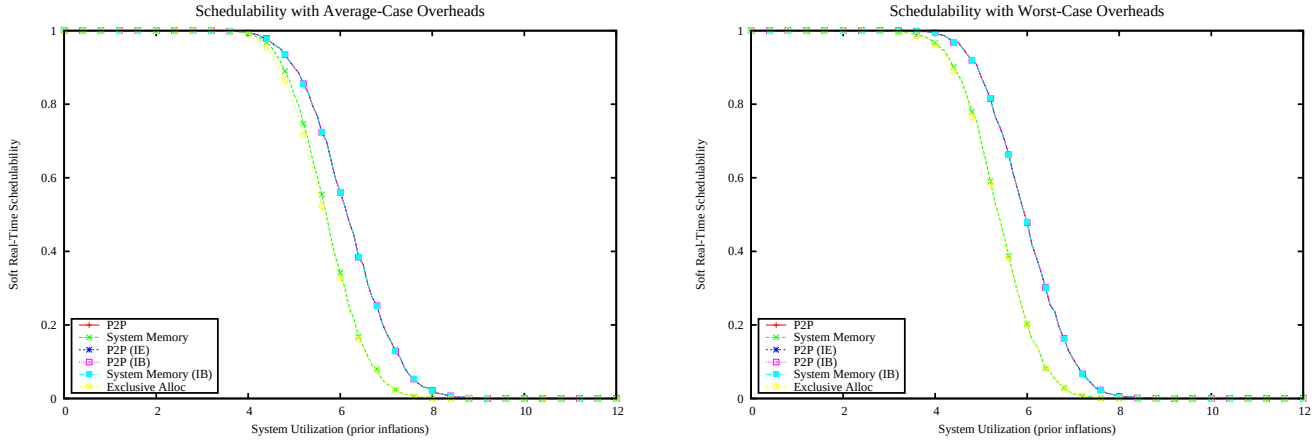

Figure 2917: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

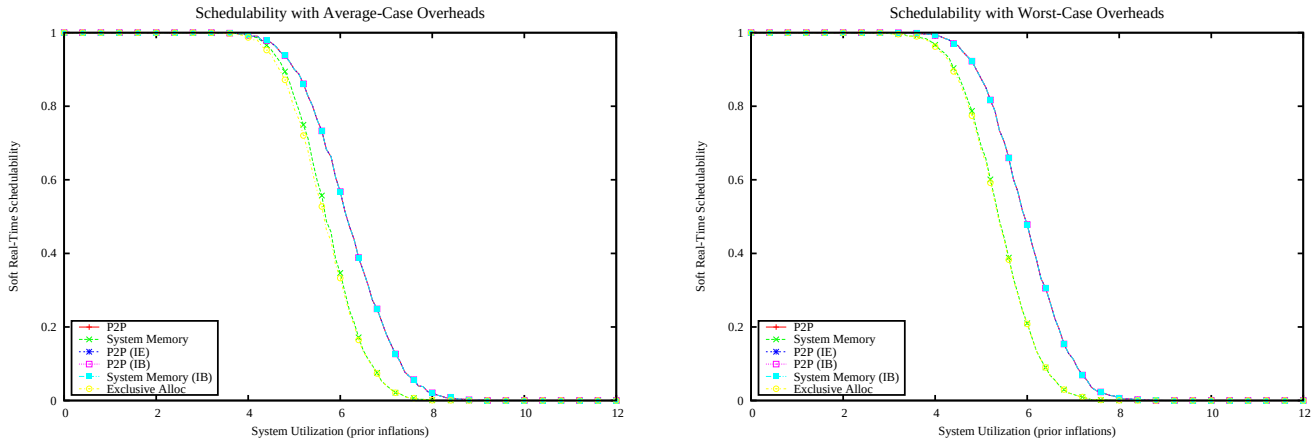

Figure 2918: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

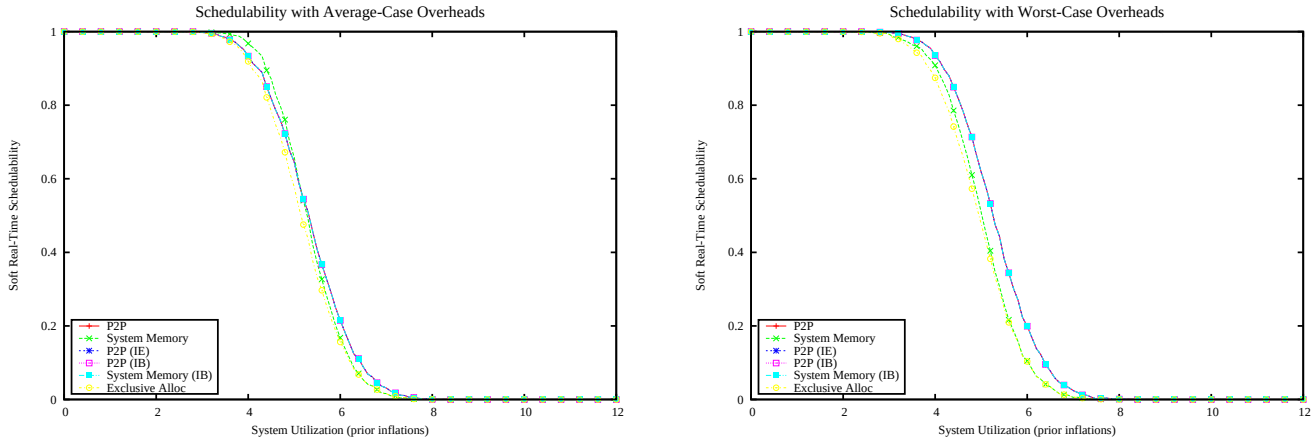

Figure 2919: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

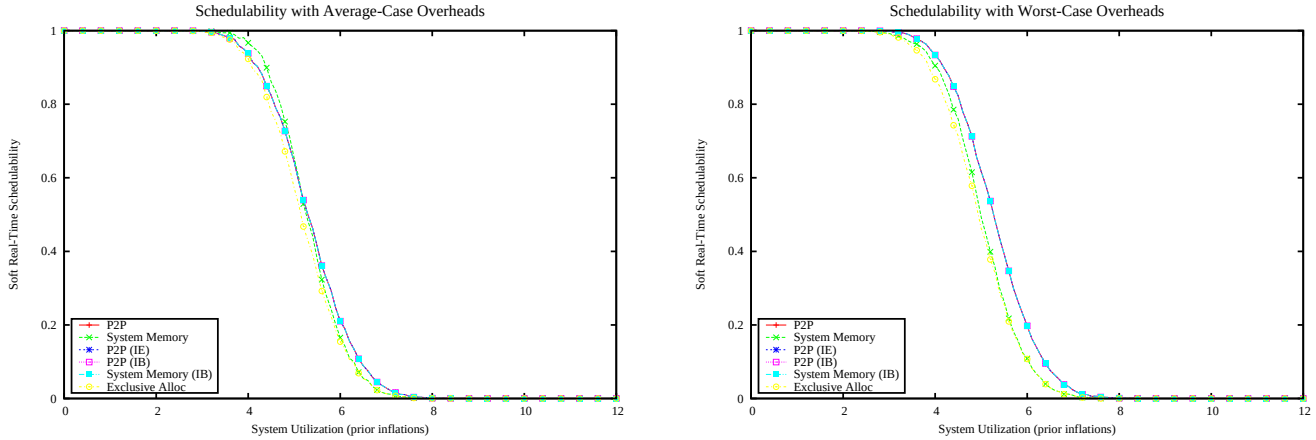

Figure 2920: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

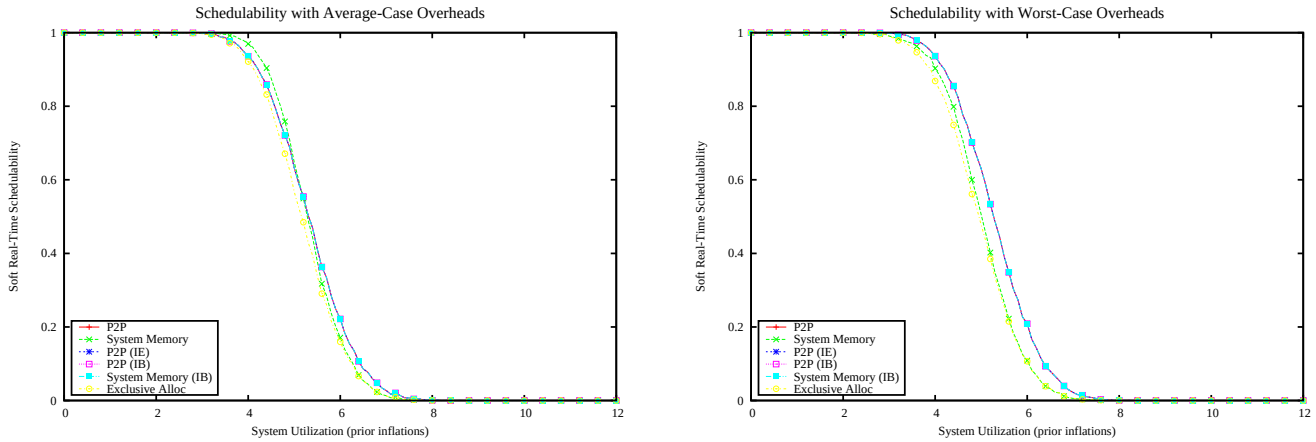

Figure 2921: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

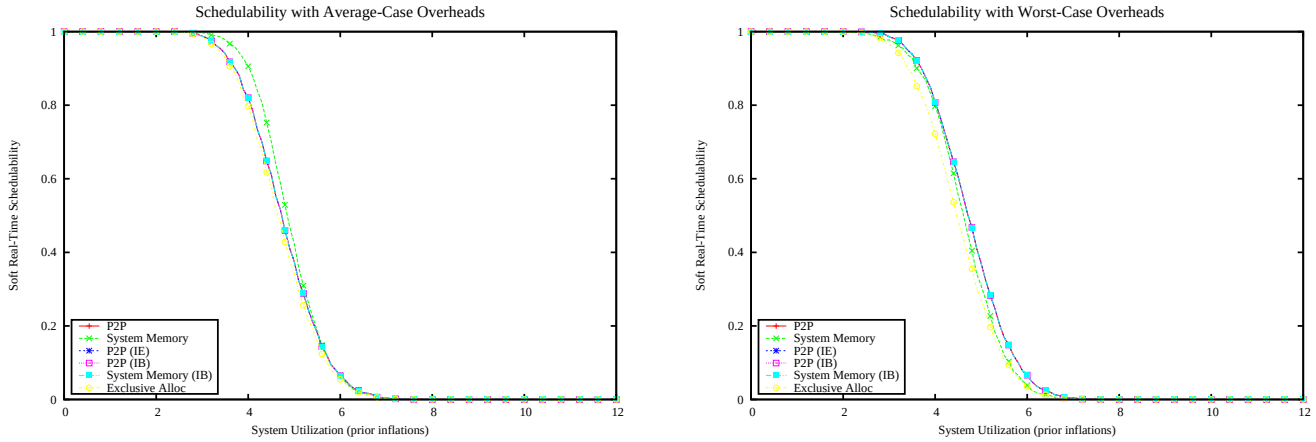

Figure 2922: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

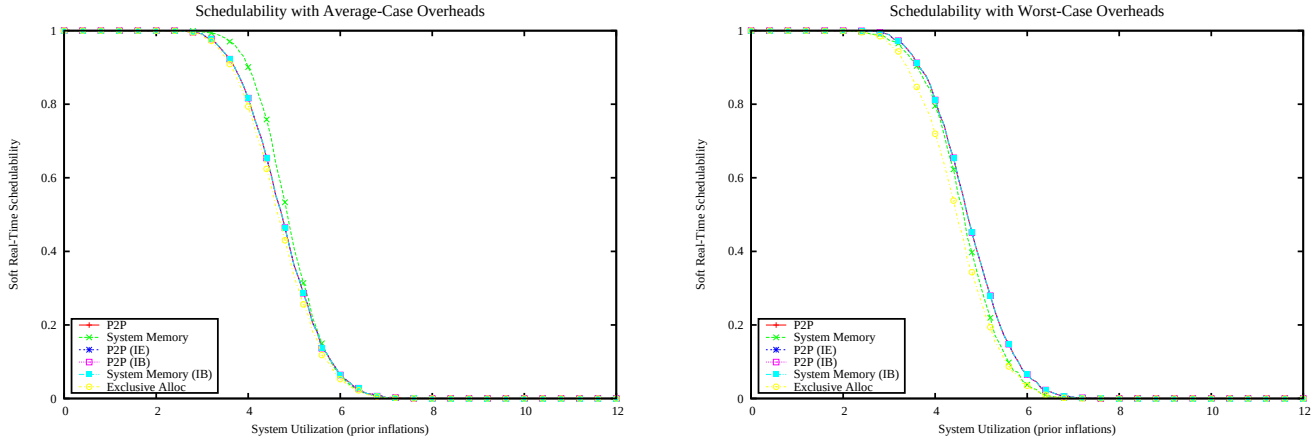

Figure 2923: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

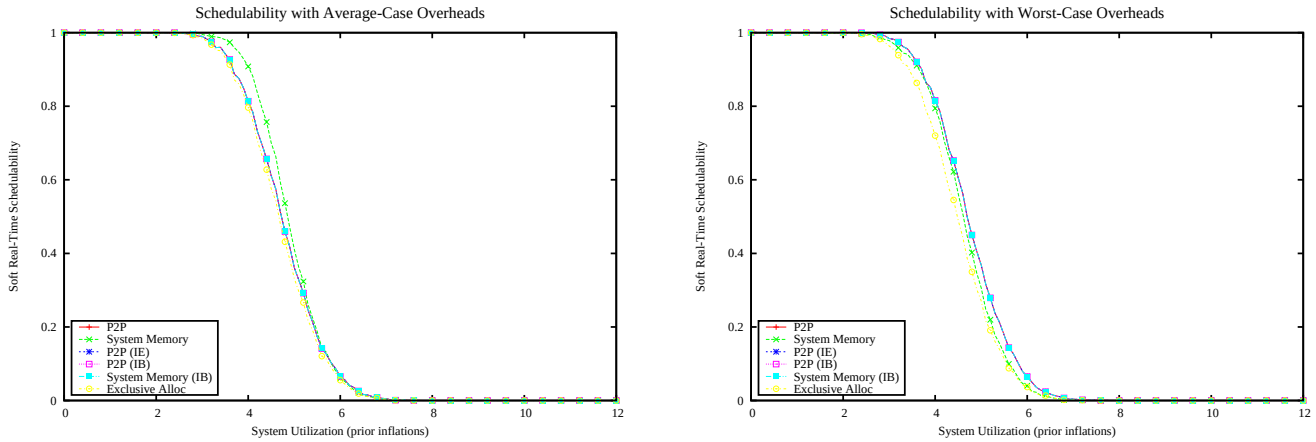

Figure 2924: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

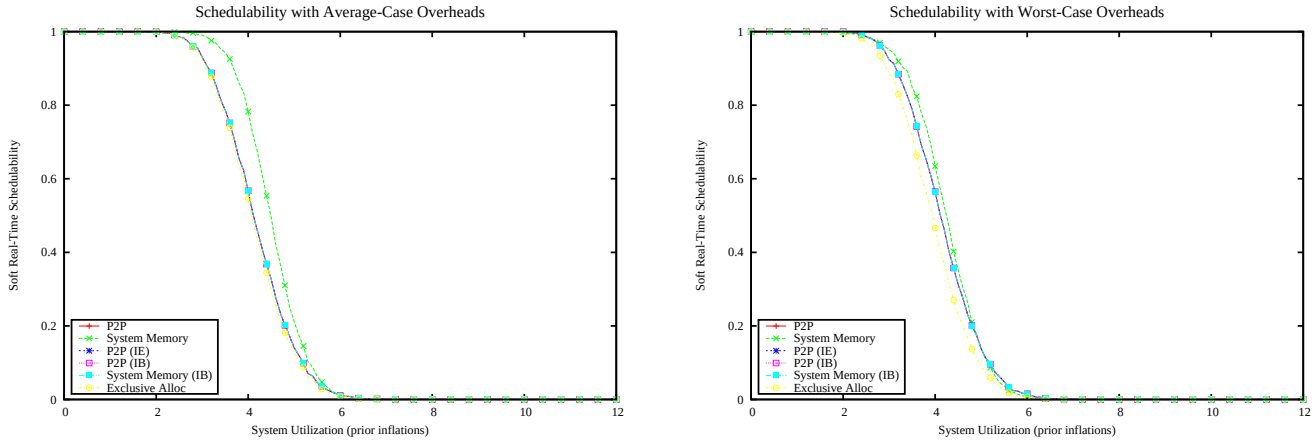

Figure 2925: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

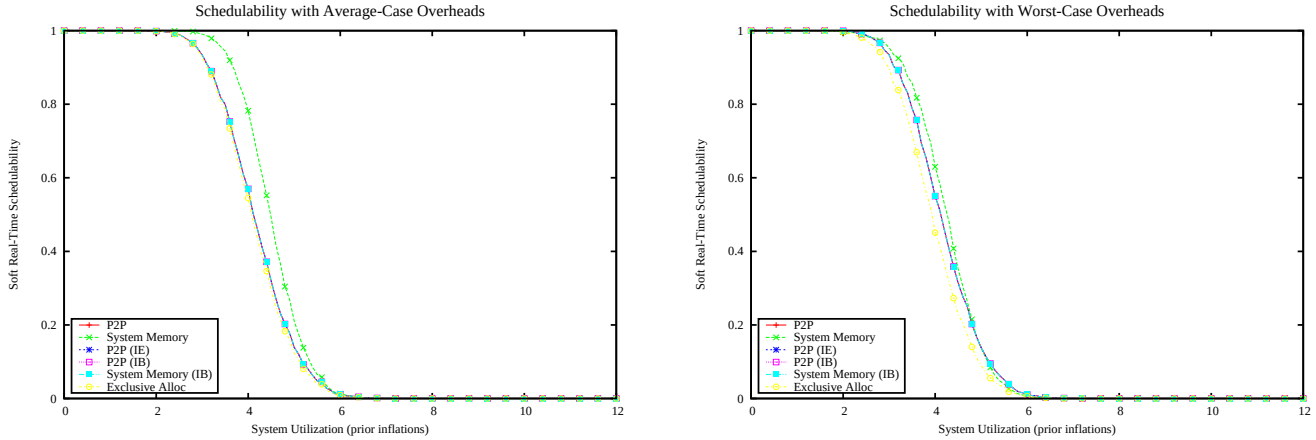

Figure 2926: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

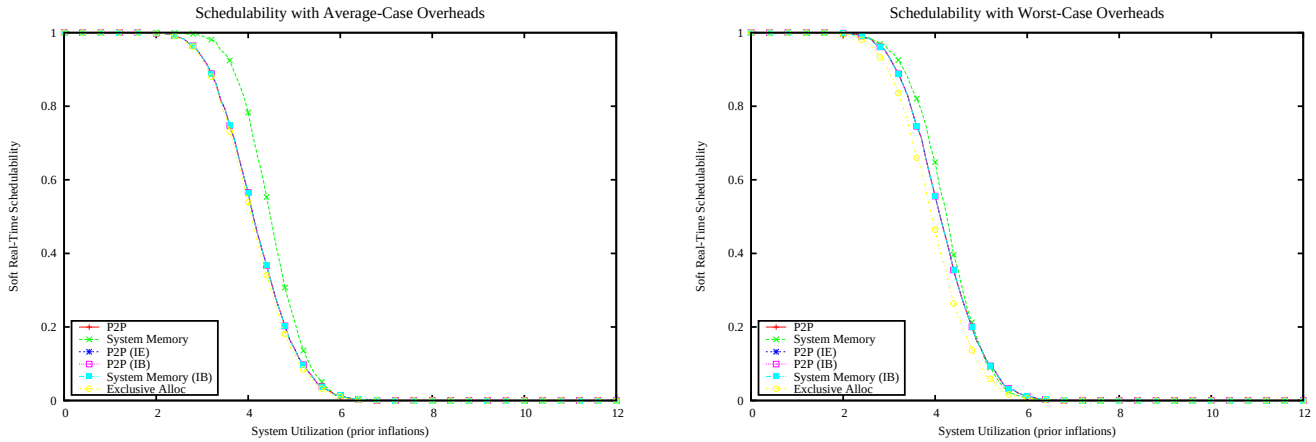

Figure 2927: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

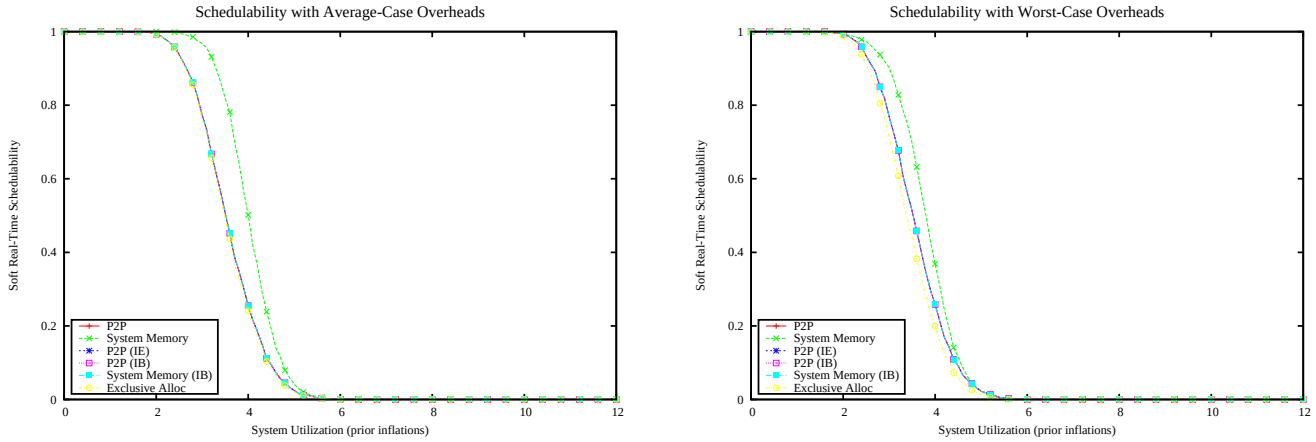

Figure 2928: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

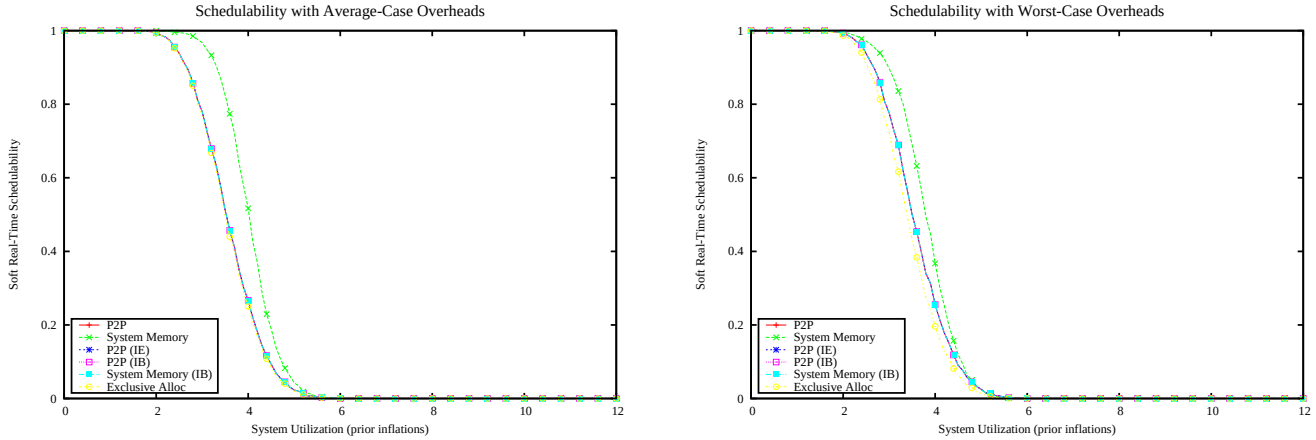

Figure 2929: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

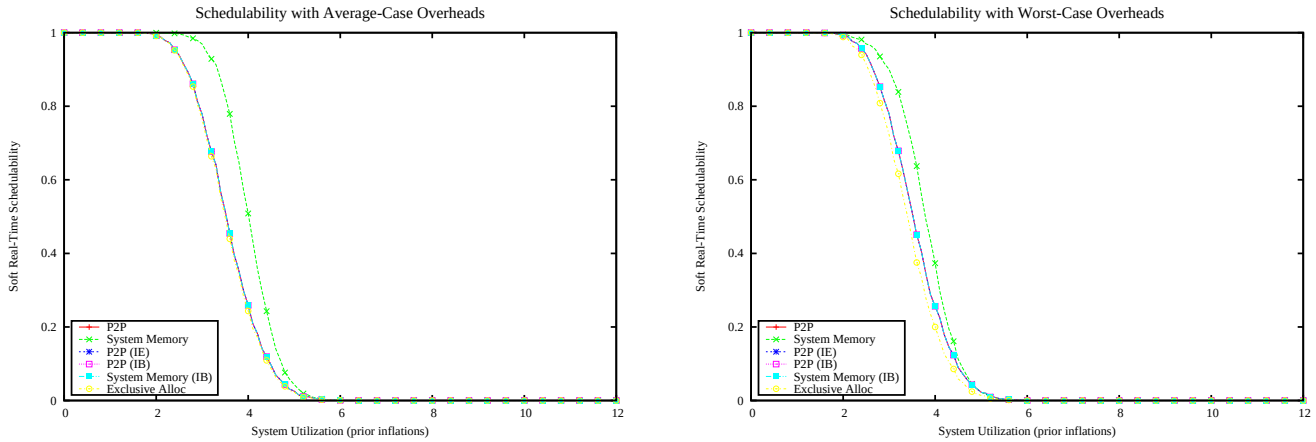

Figure 2930: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

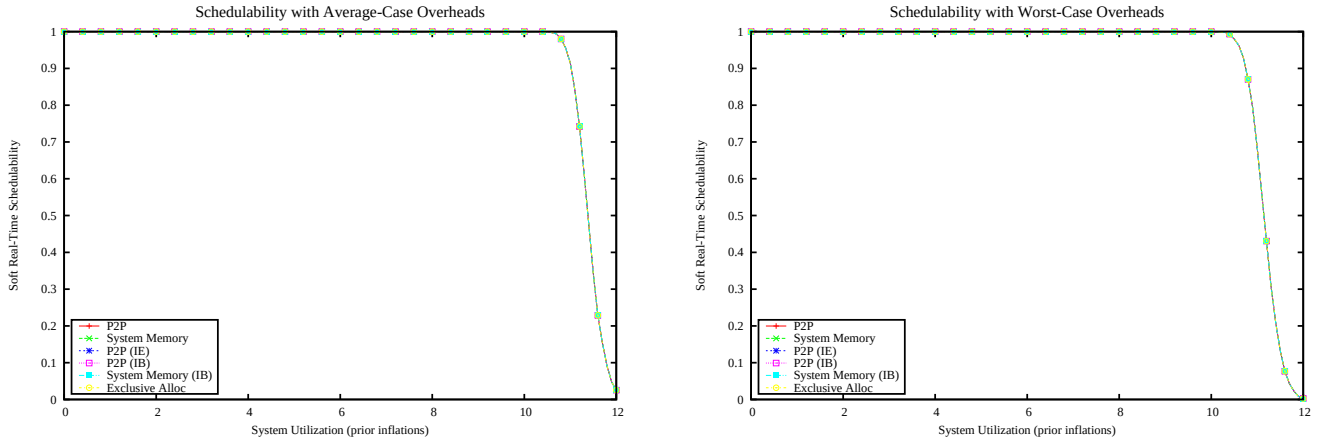

Figure 2931: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

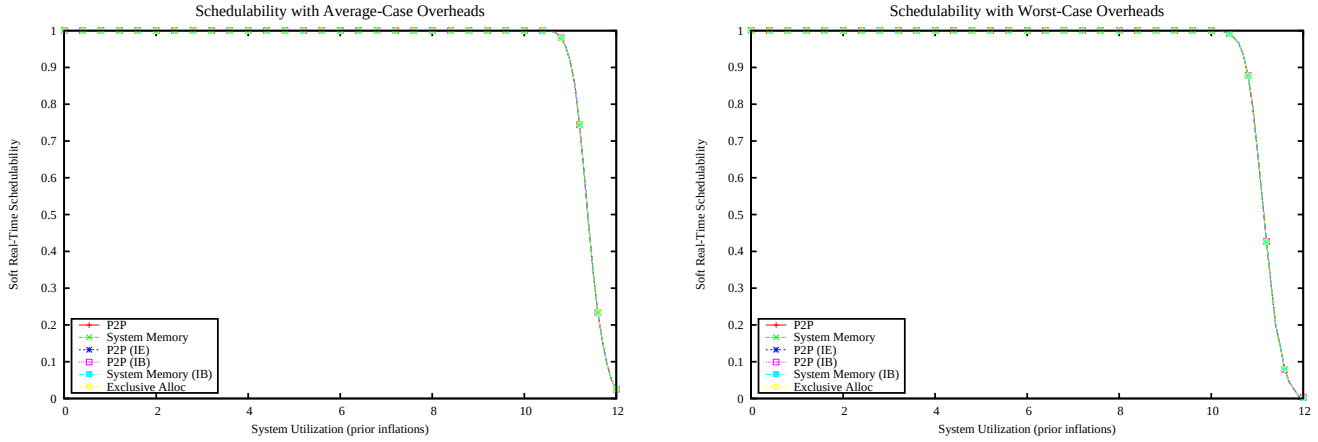

Figure 2932: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

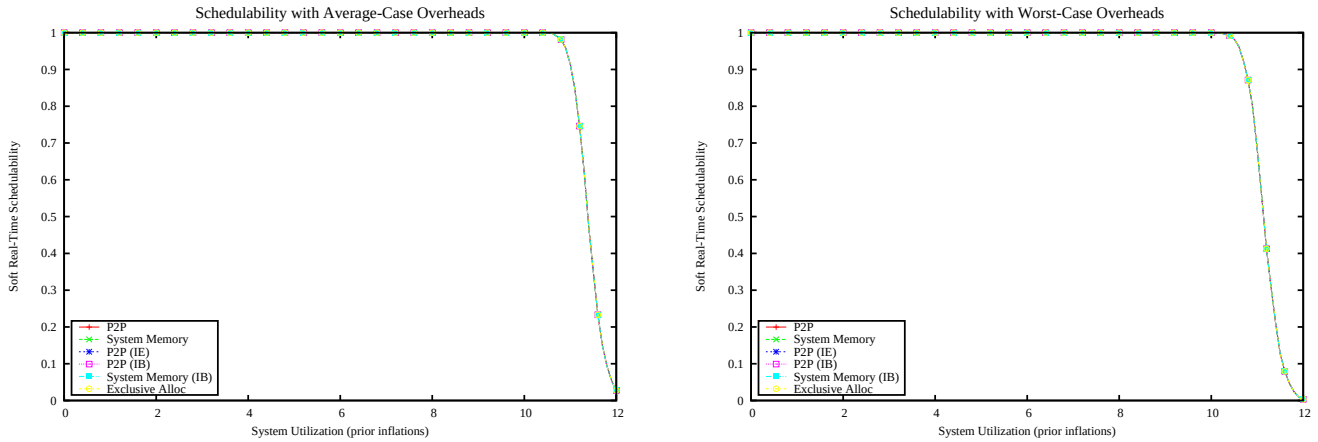

Figure 2933: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

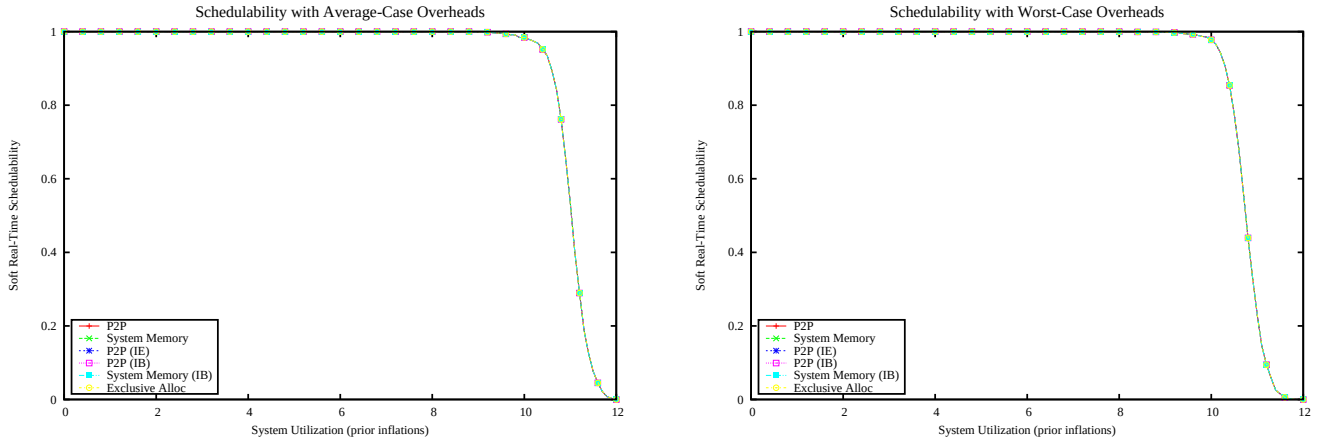

Figure 2934: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

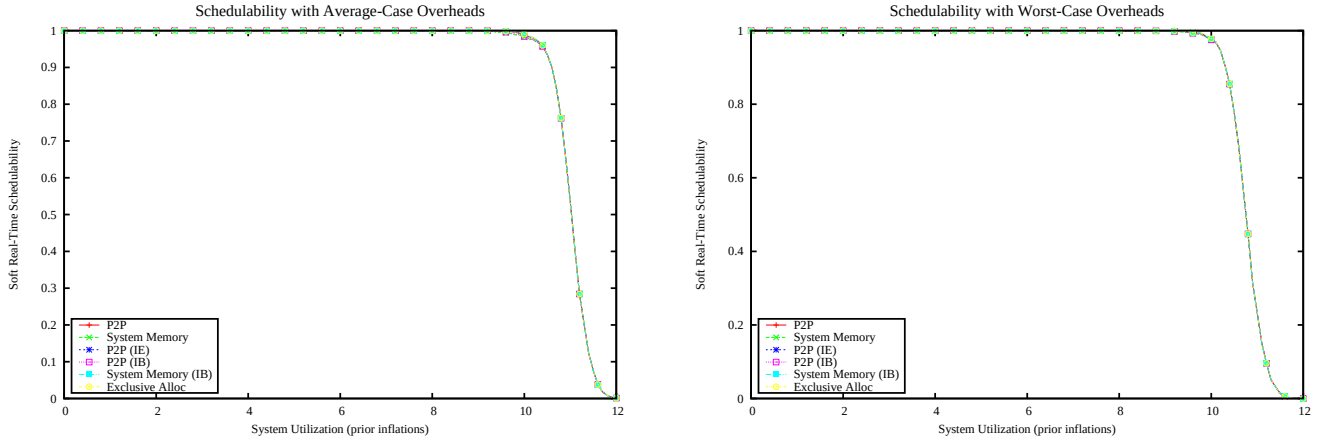

Figure 2935: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

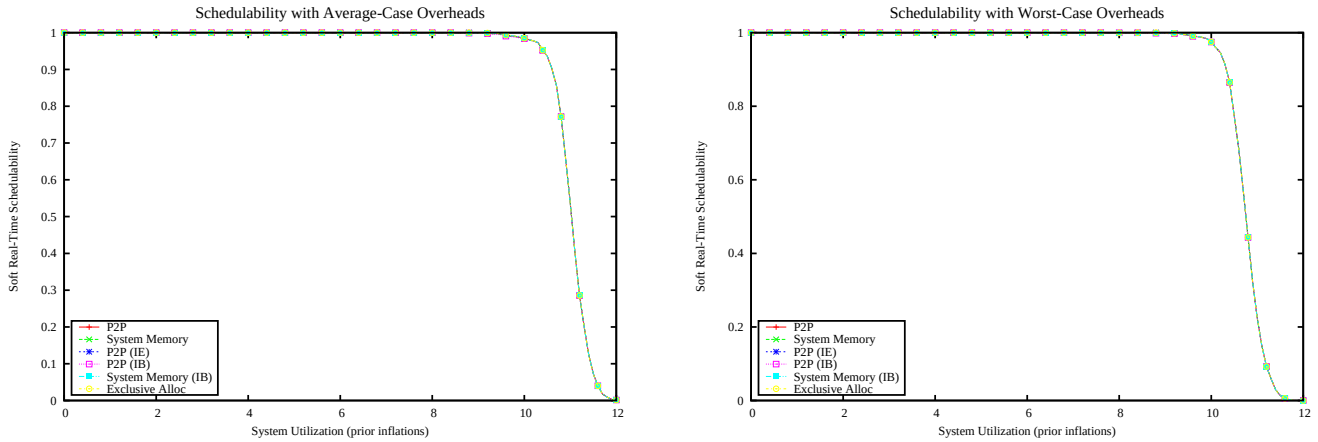

Figure 2936: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

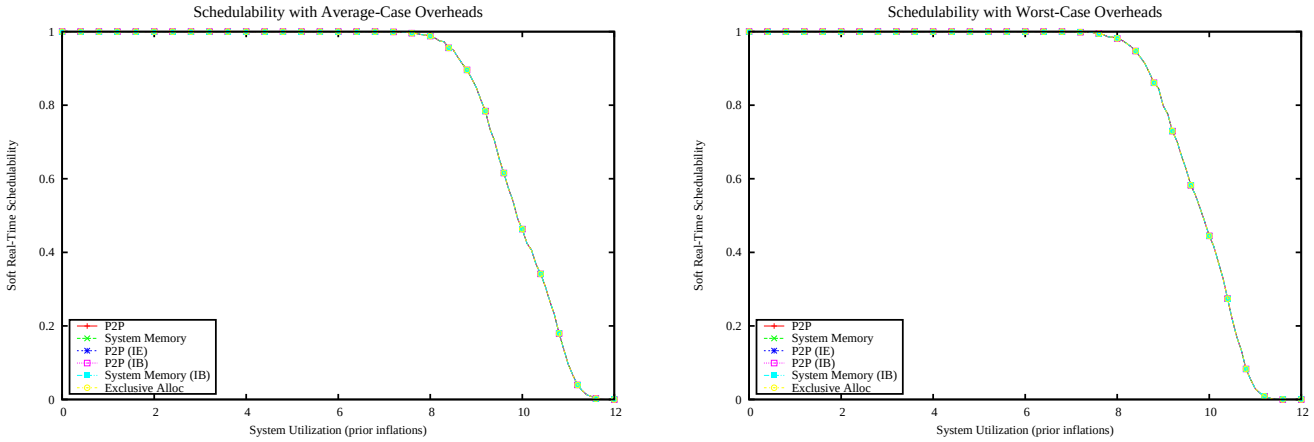

Figure 2937: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

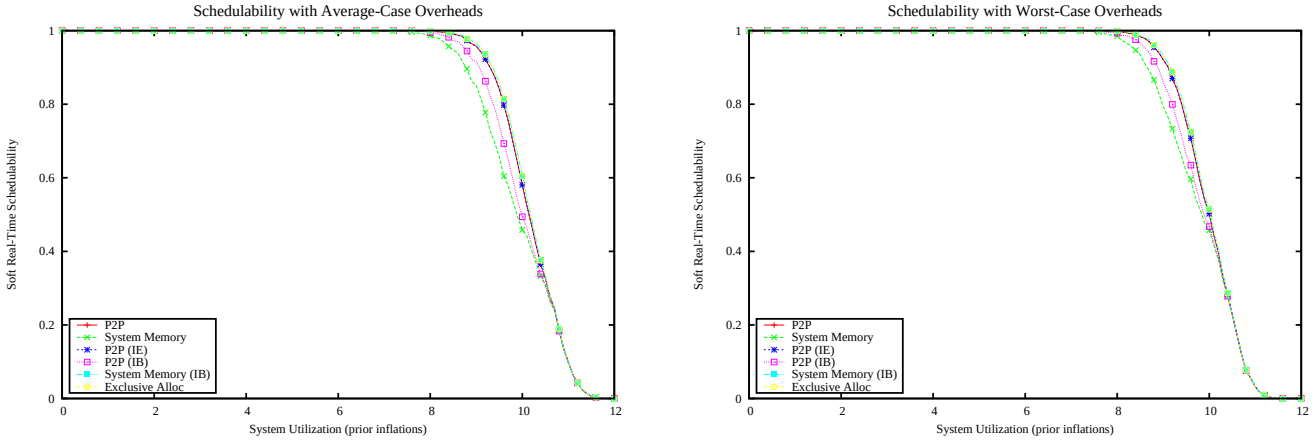

Figure 2938: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

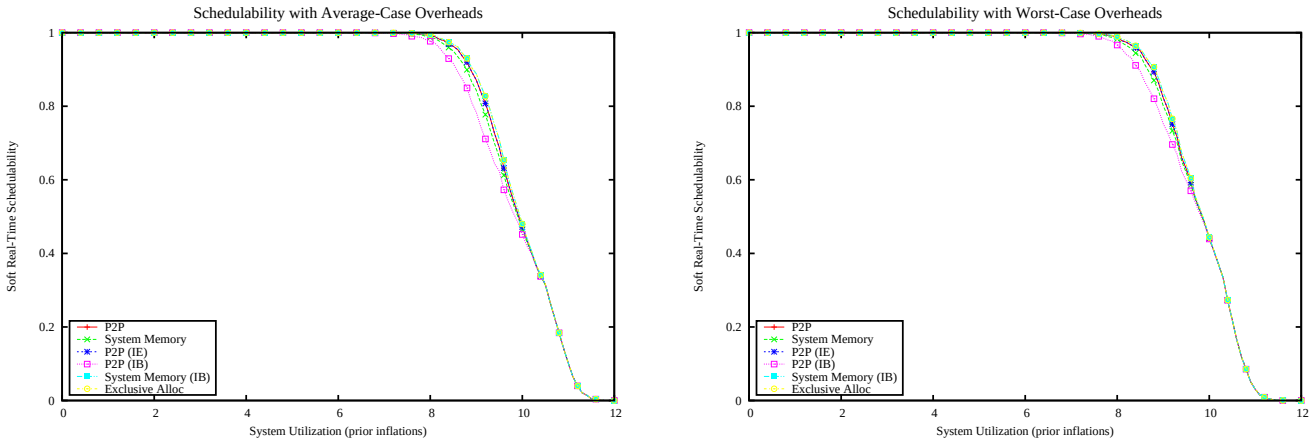

Figure 2939: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

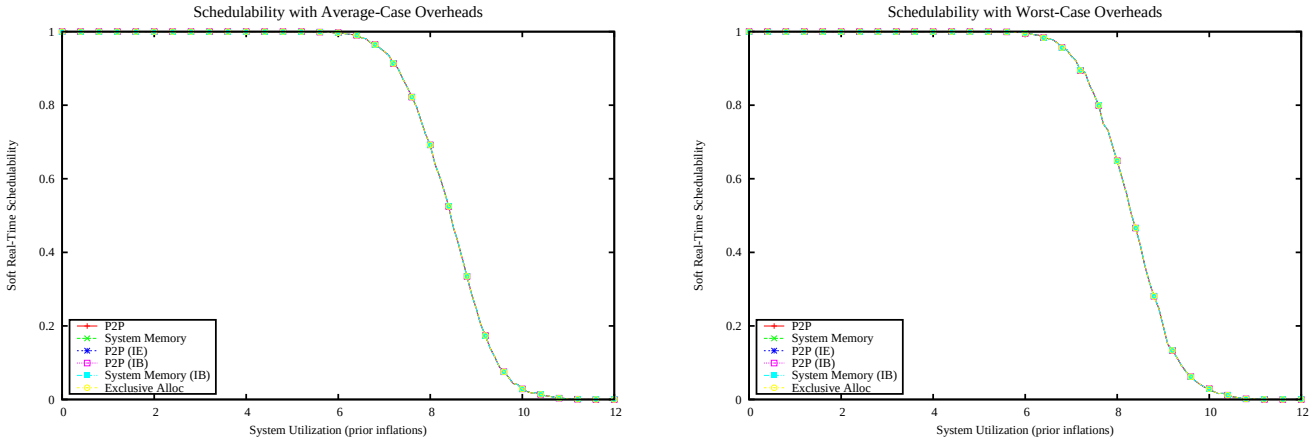

Figure 2940: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

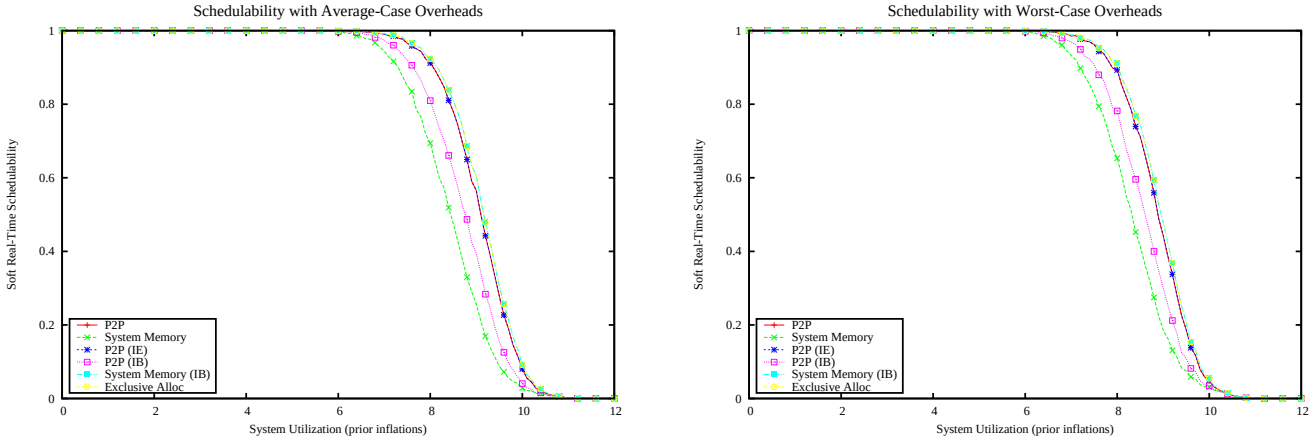

Figure 2941: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

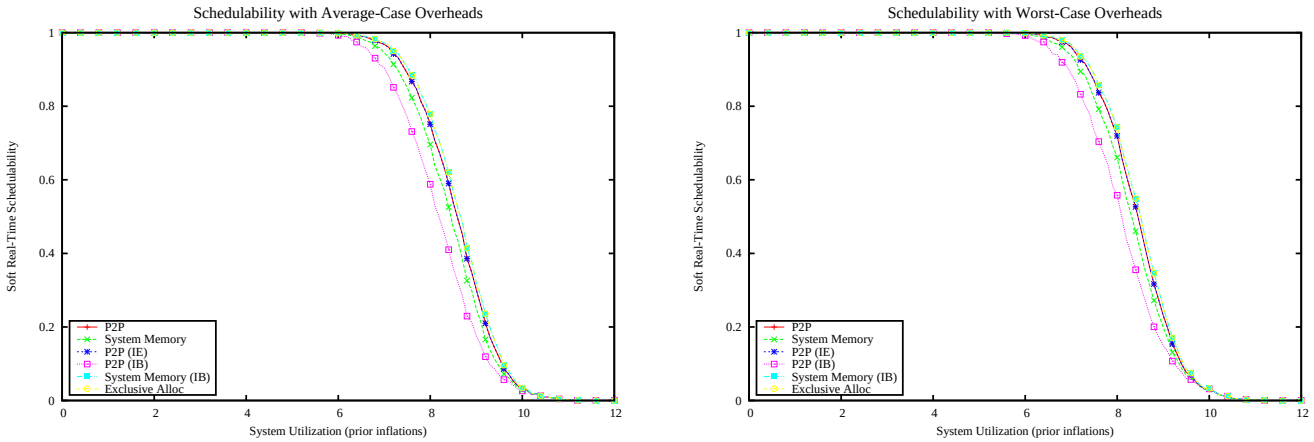

Figure 2942: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

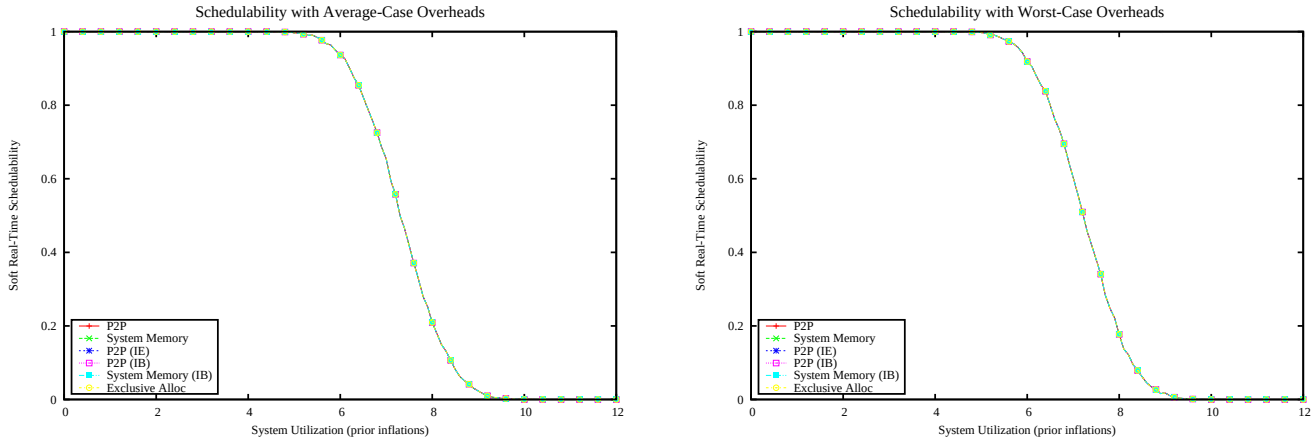

Figure 2943: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

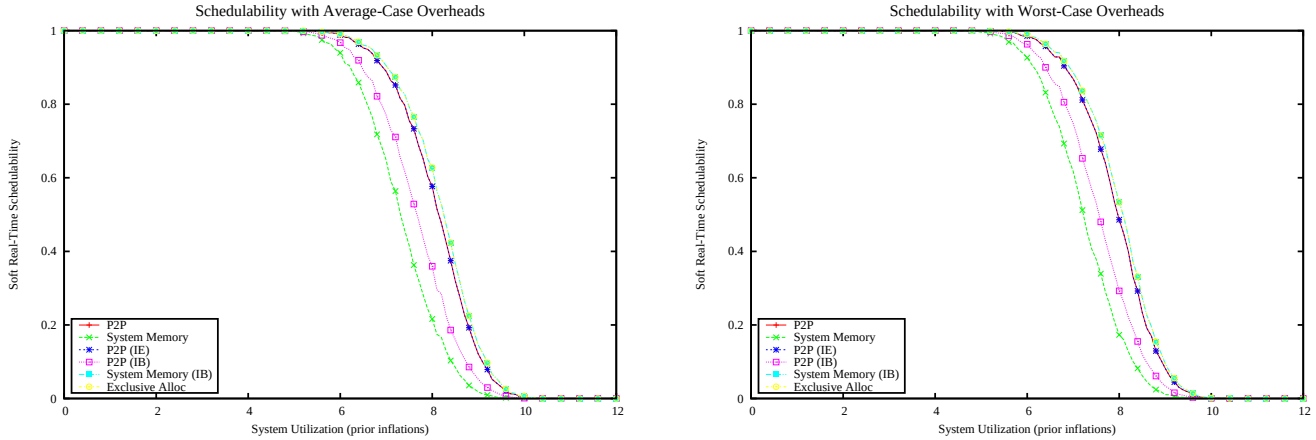

Figure 2944: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

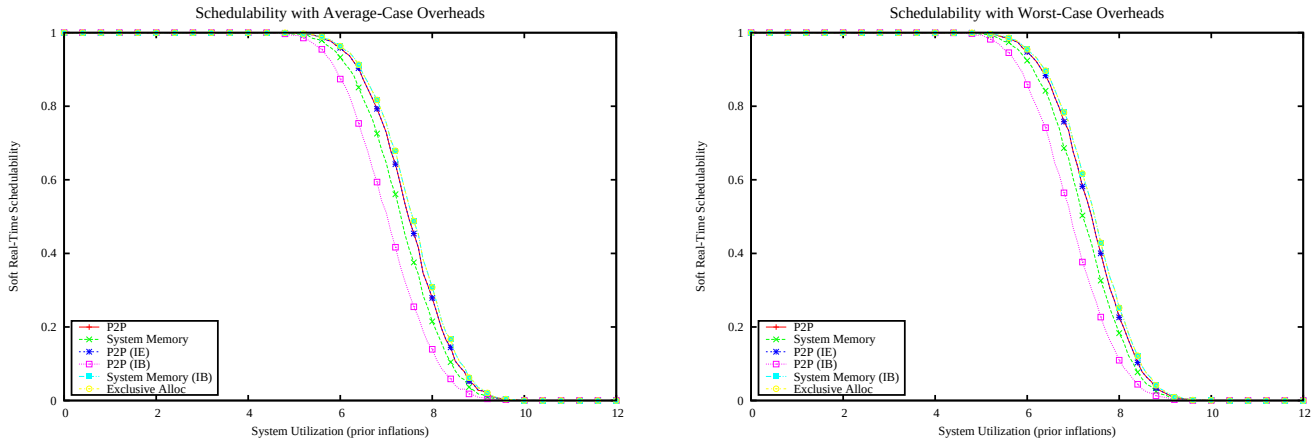

Figure 2945: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

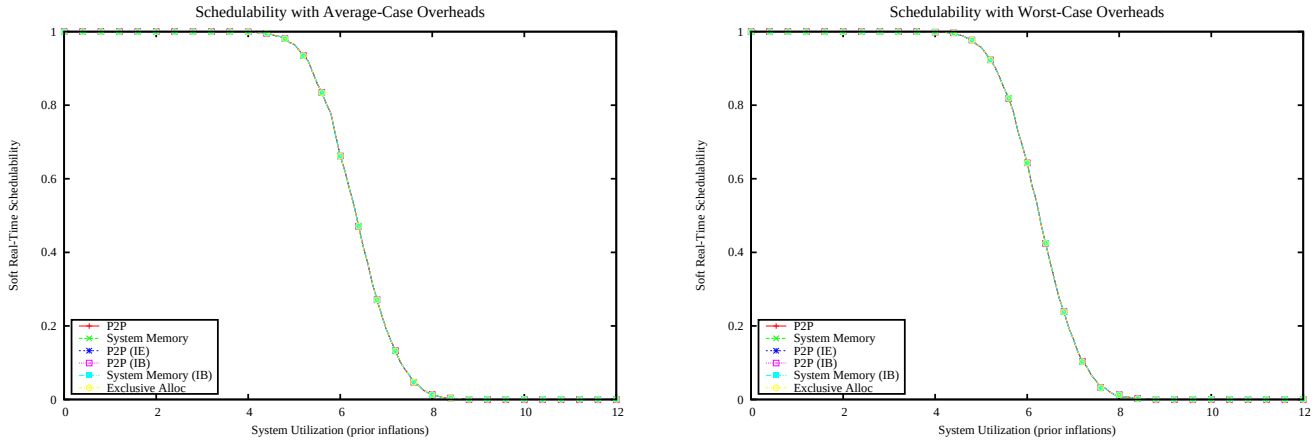

Figure 2946: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

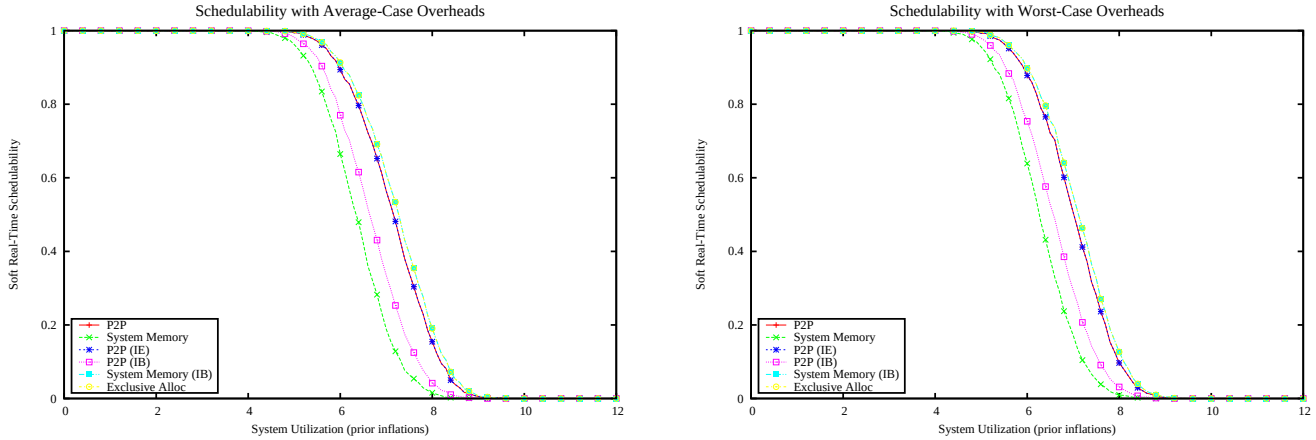

Figure 2947: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

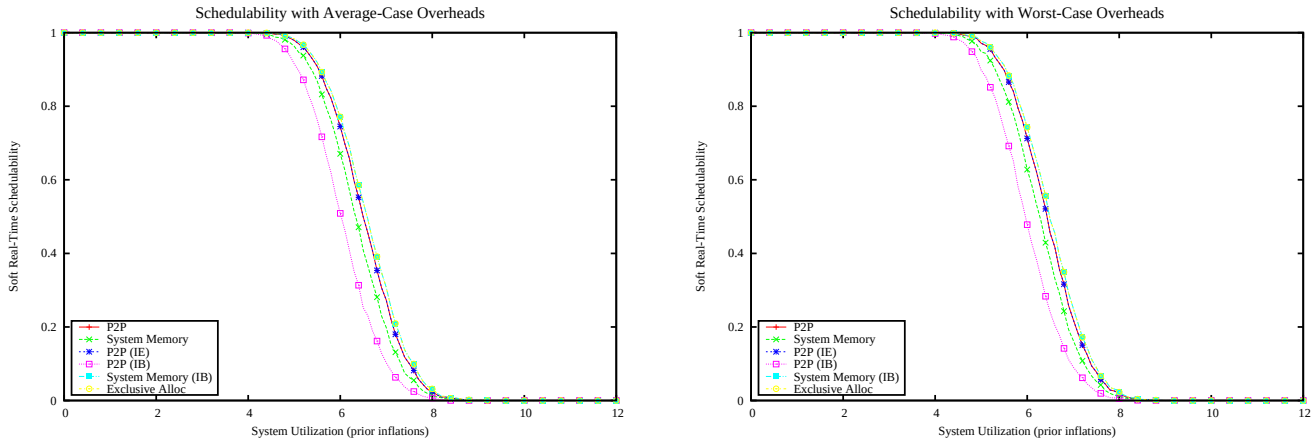

Figure 2948: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

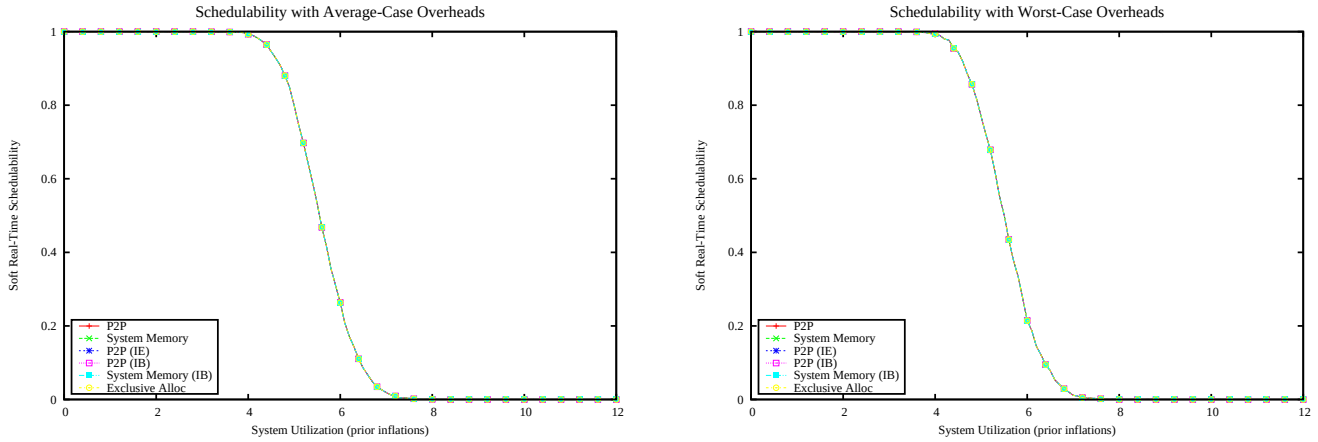

Figure 2949: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

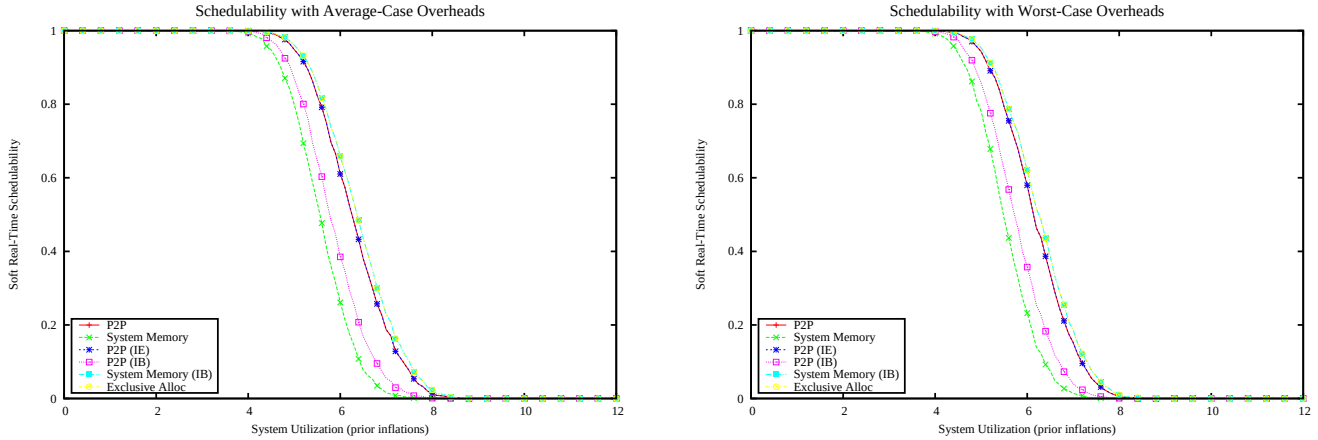

Figure 2950: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

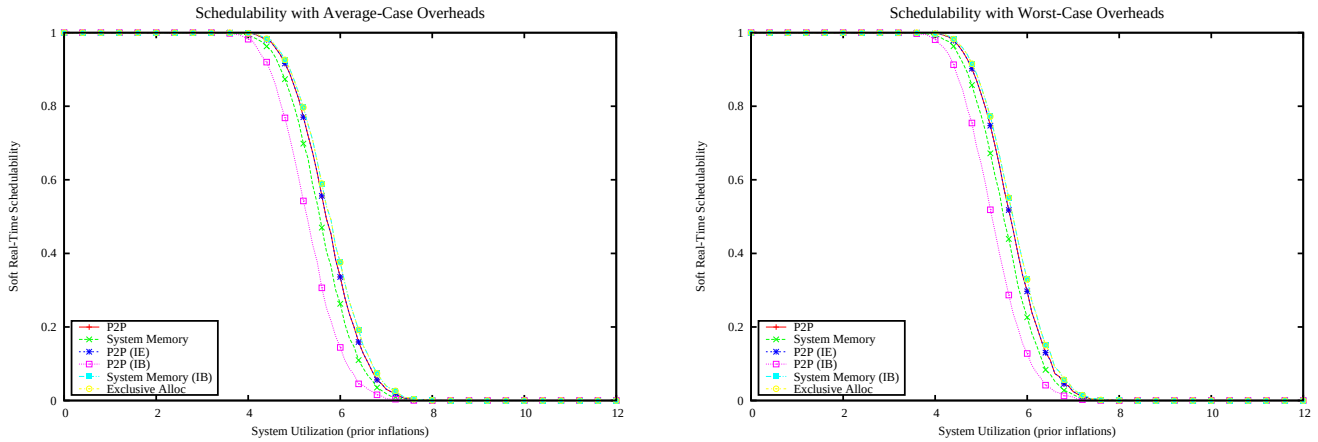

Figure 2951: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

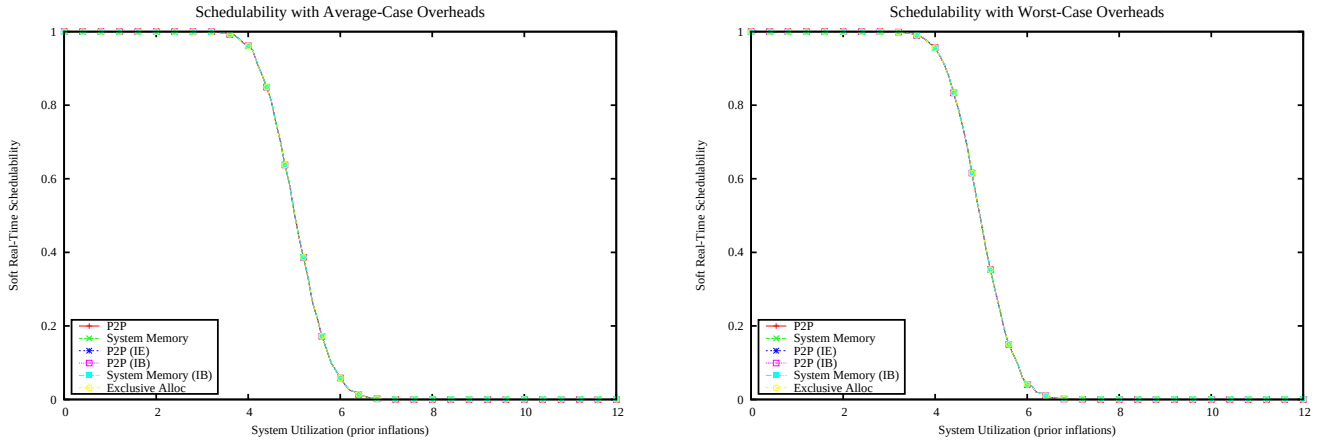

Figure 2952: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

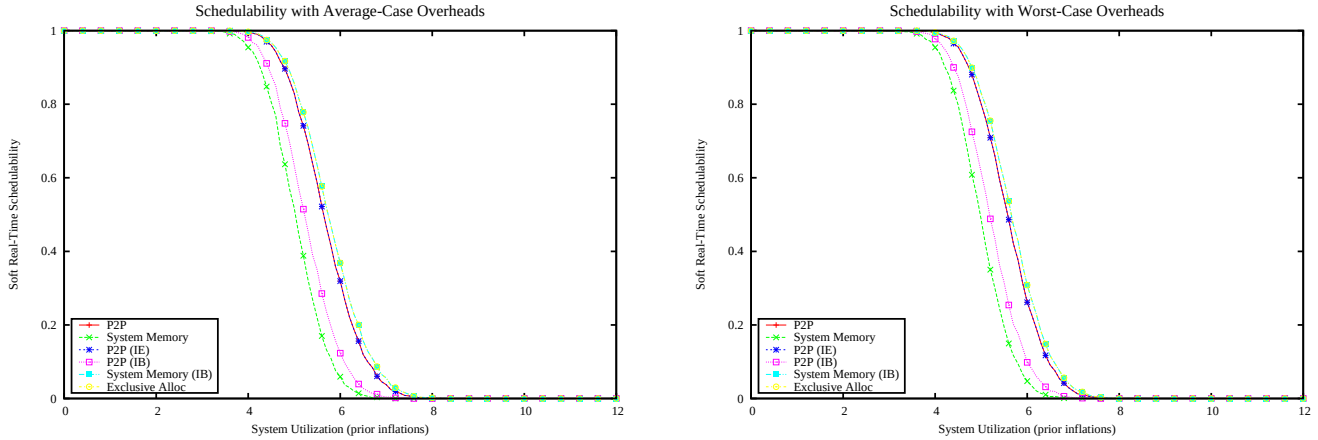

Figure 2953: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

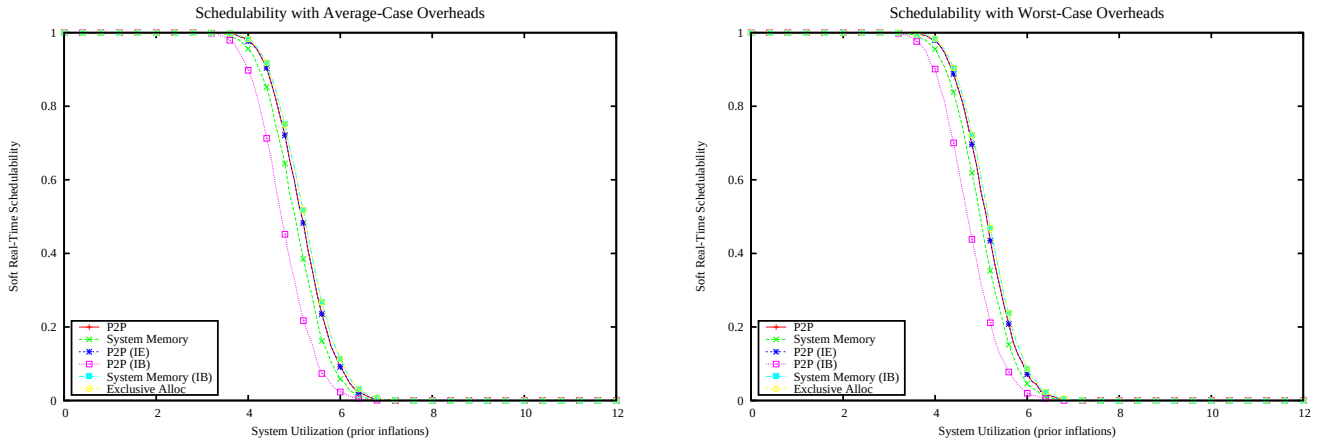

Figure 2954: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

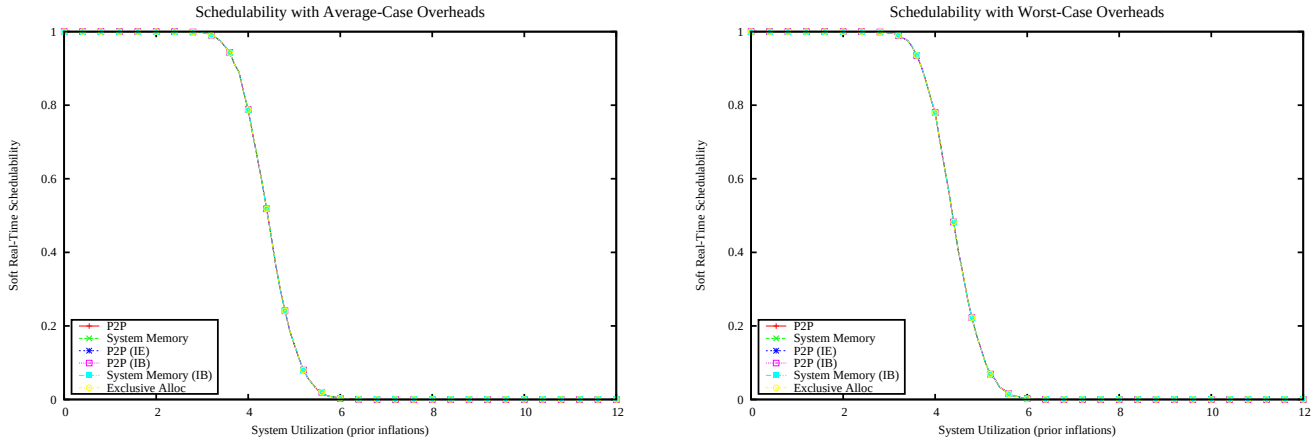

Figure 2955: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

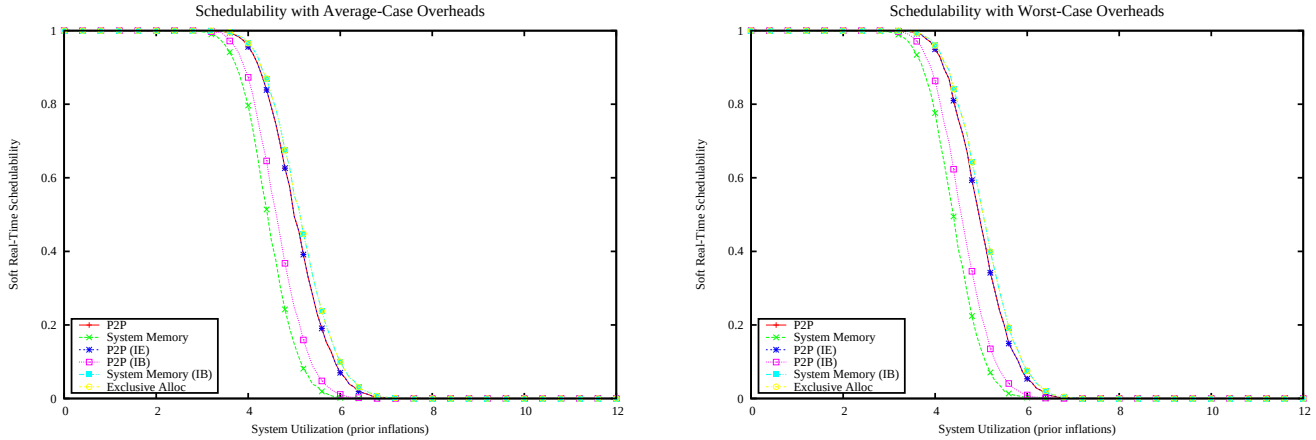

Figure 2956: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

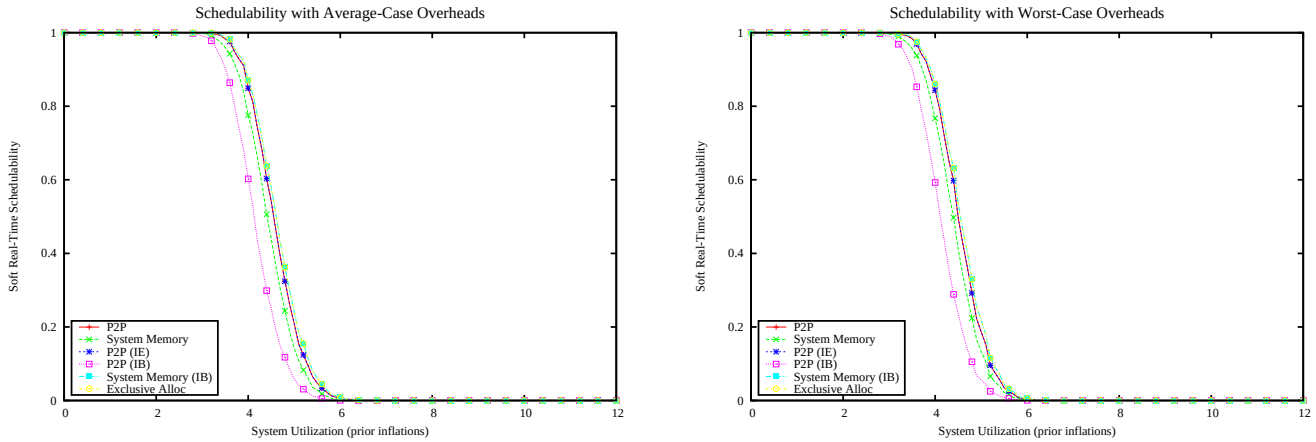

Figure 2957: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

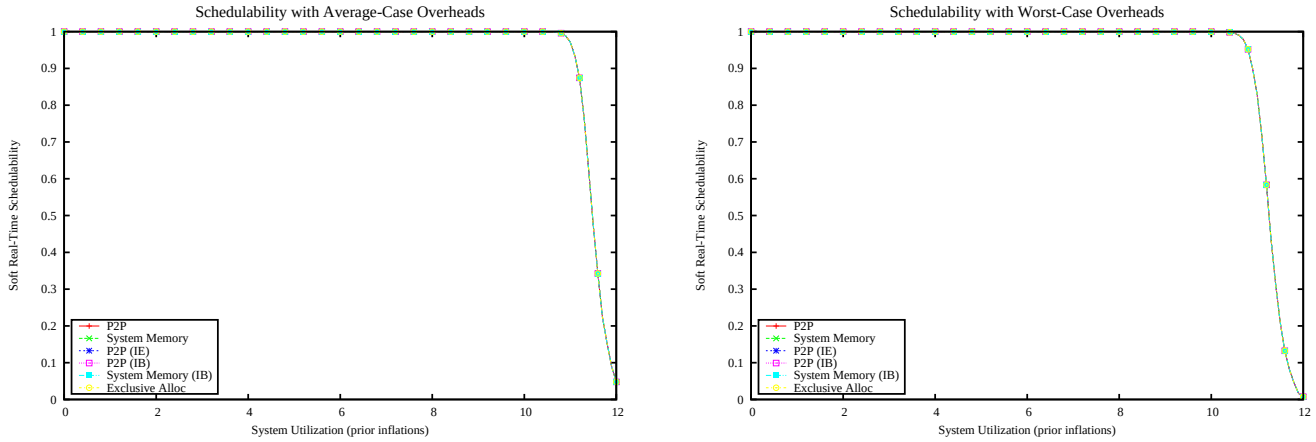

Figure 2958: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

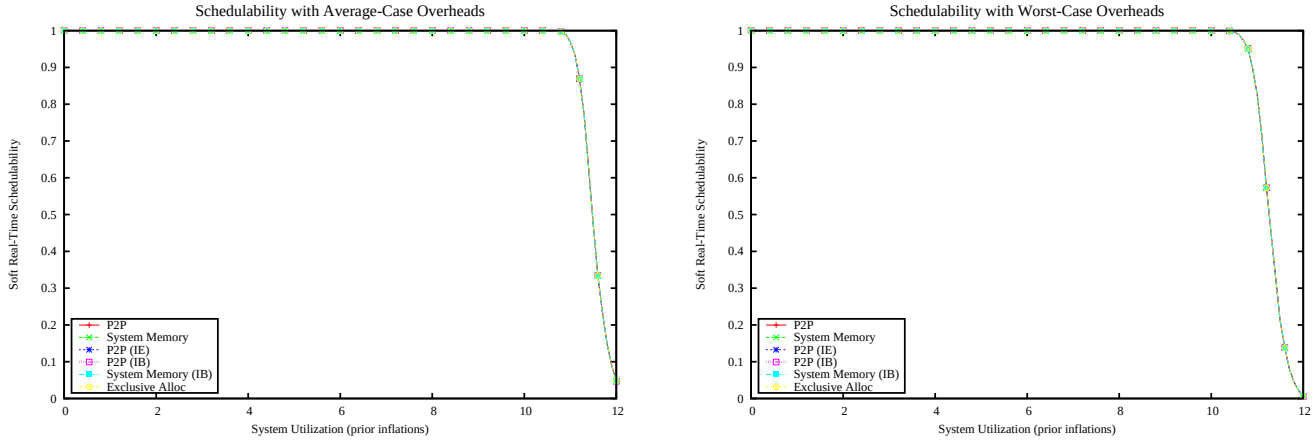

Figure 2959: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

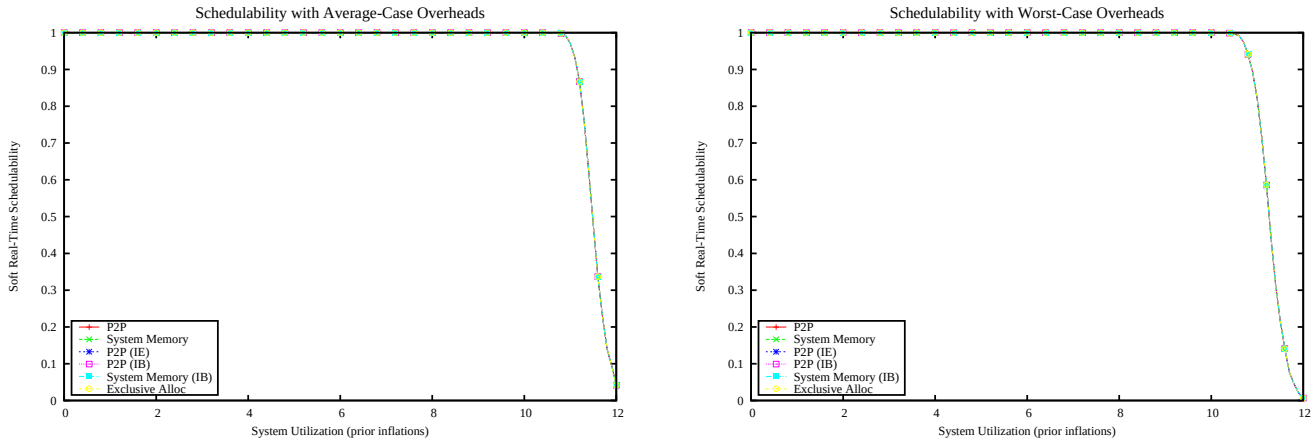

Figure 2960: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

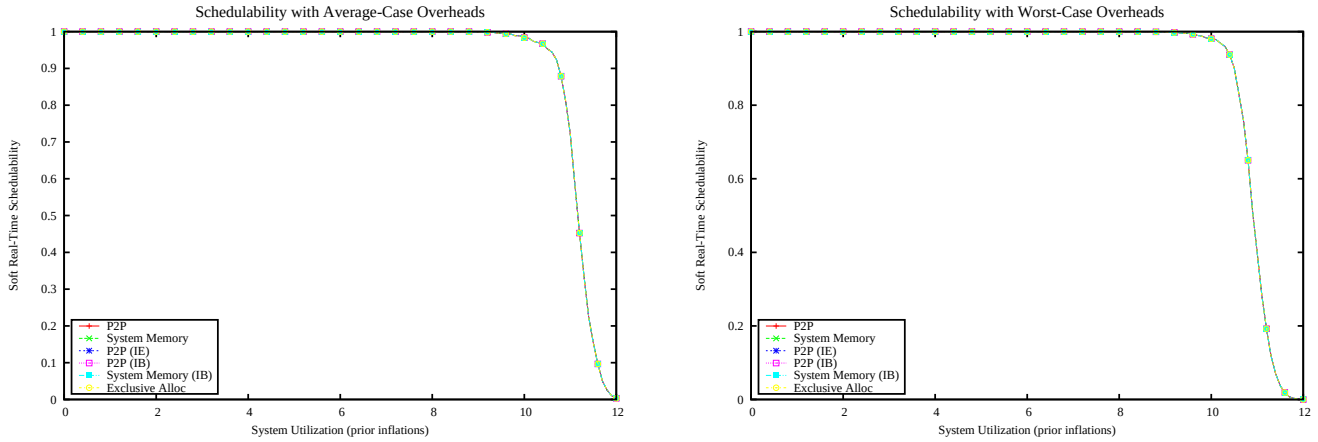

Figure 2961: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

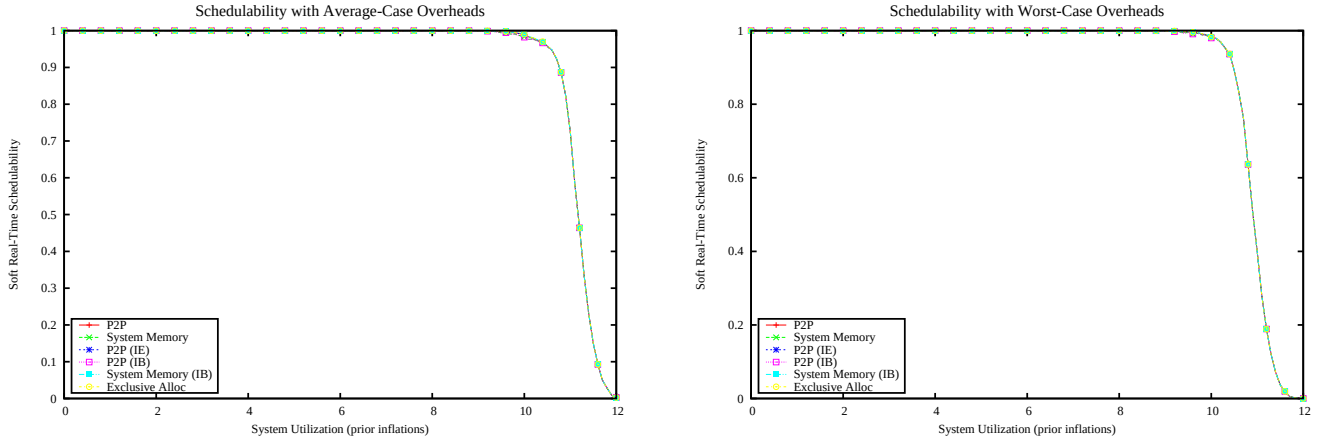

Figure 2962: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

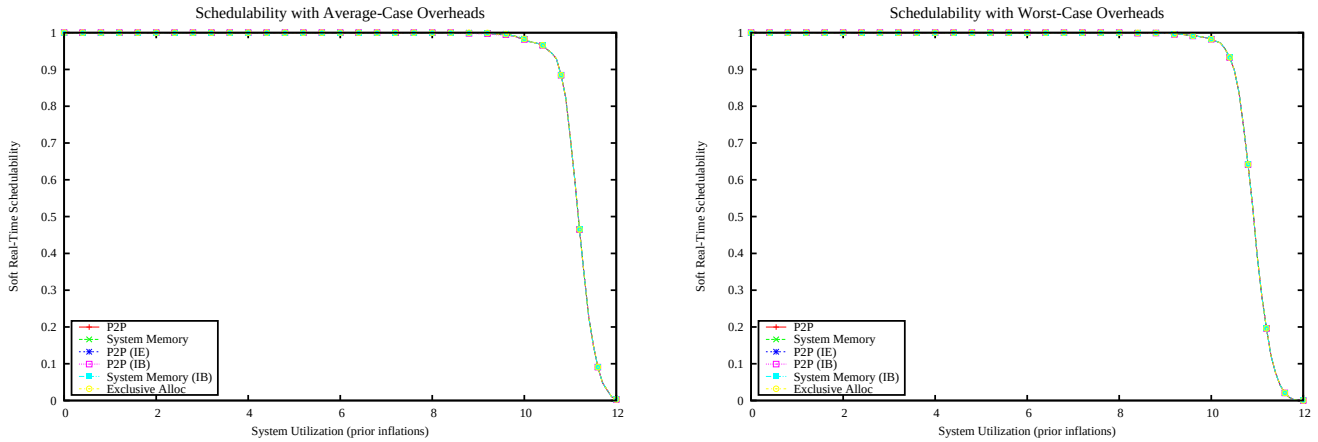

Figure 2963: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

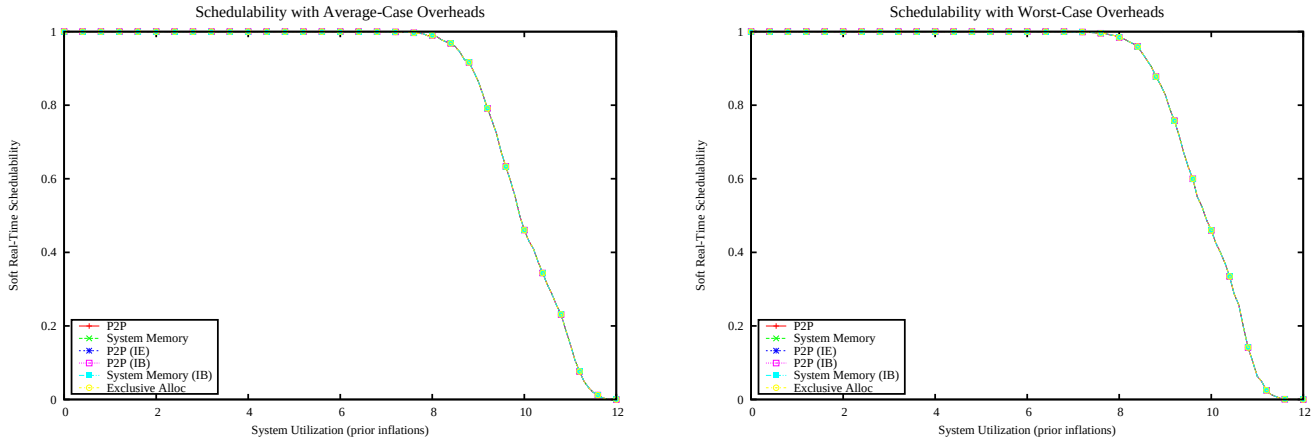

Figure 2964: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

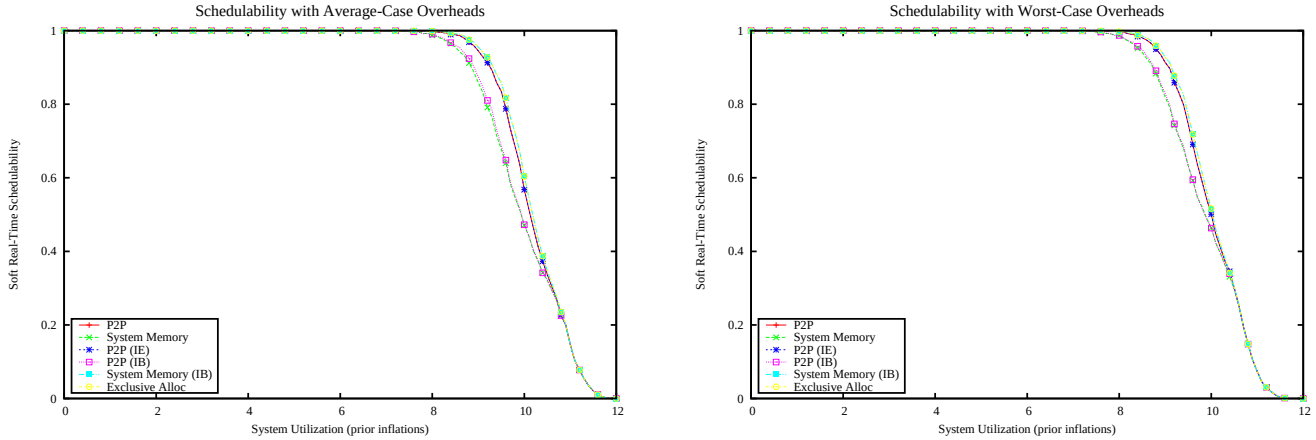

Figure 2965: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

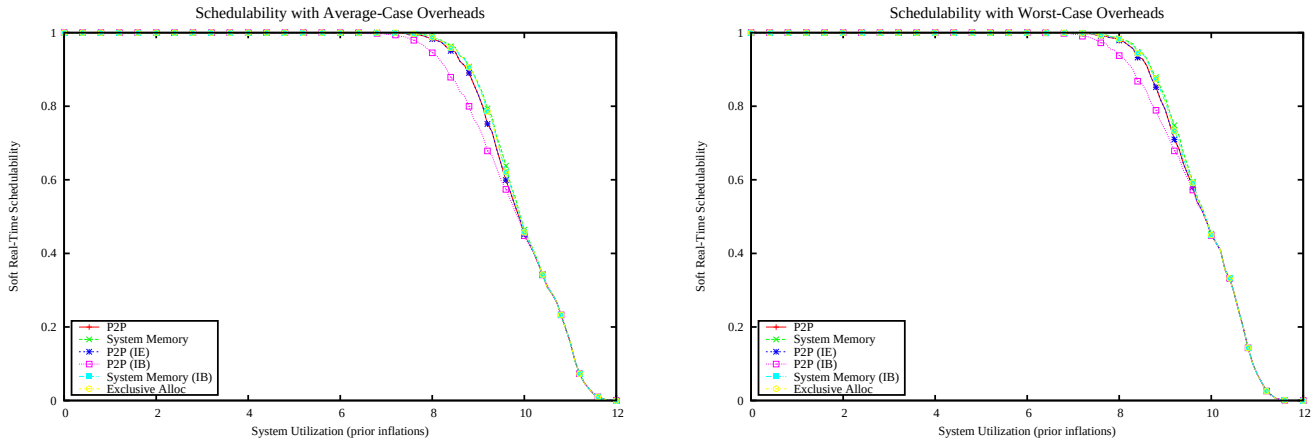

Figure 2966: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

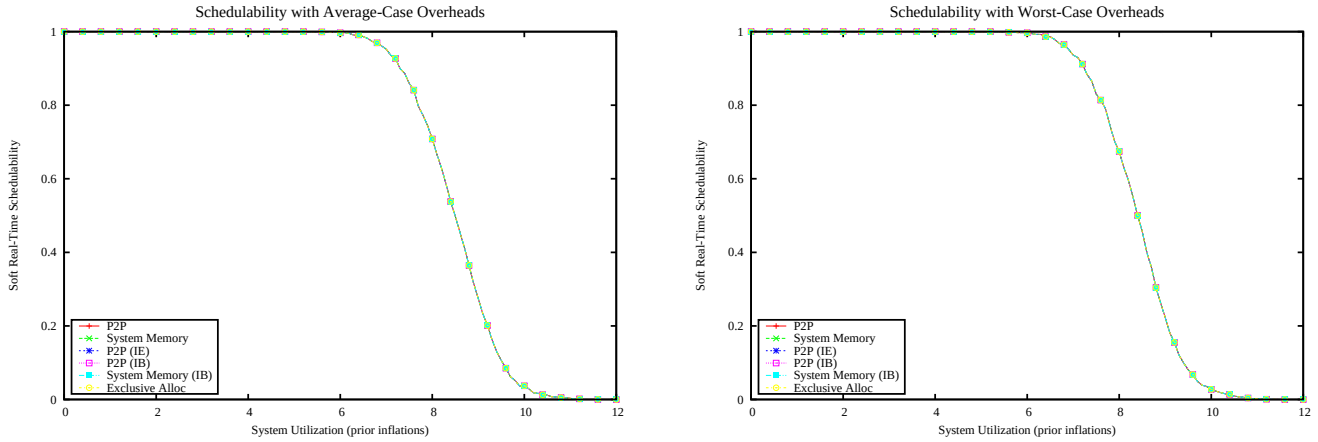

Figure 2967: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

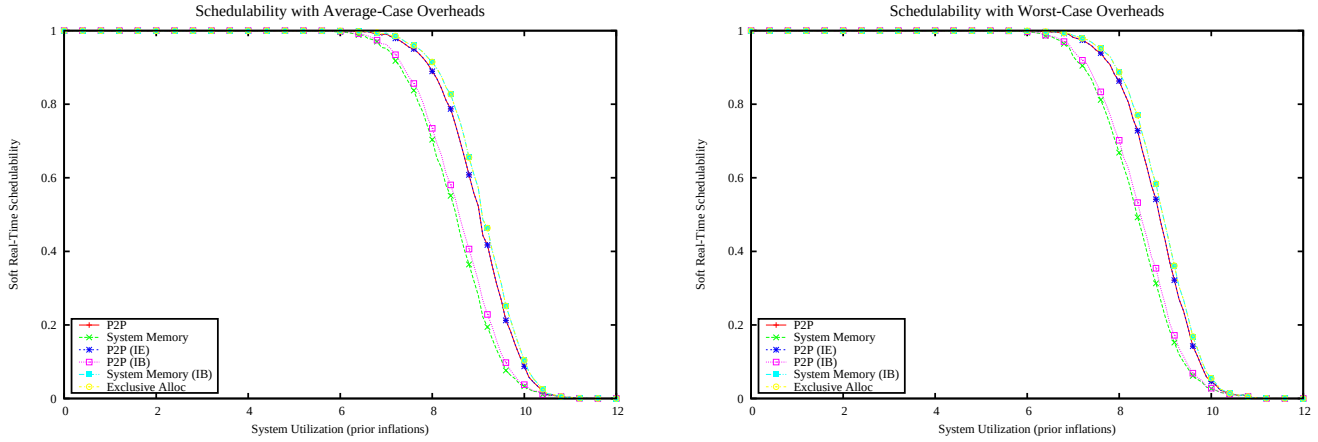

Figure 2968: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

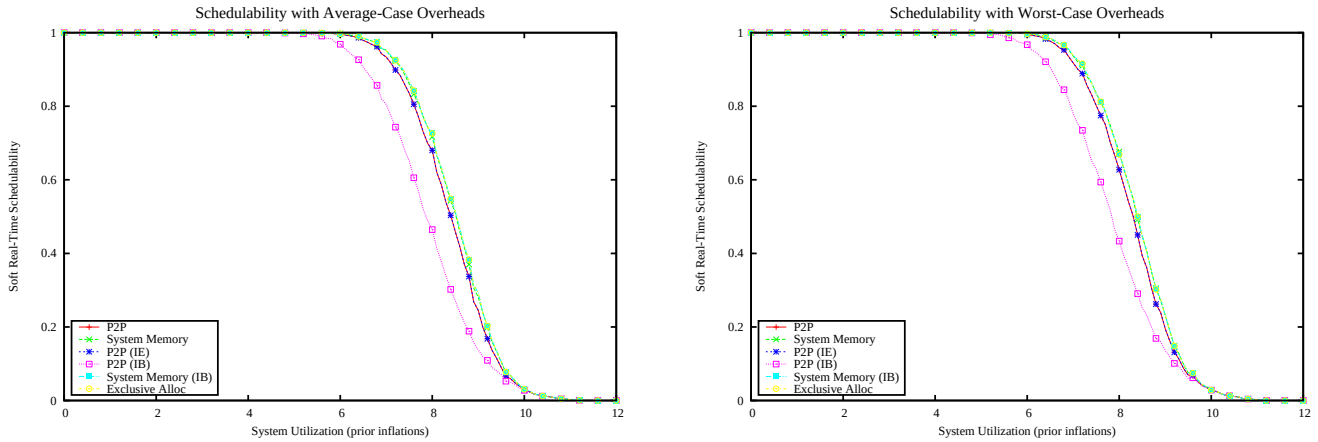

Figure 2969: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

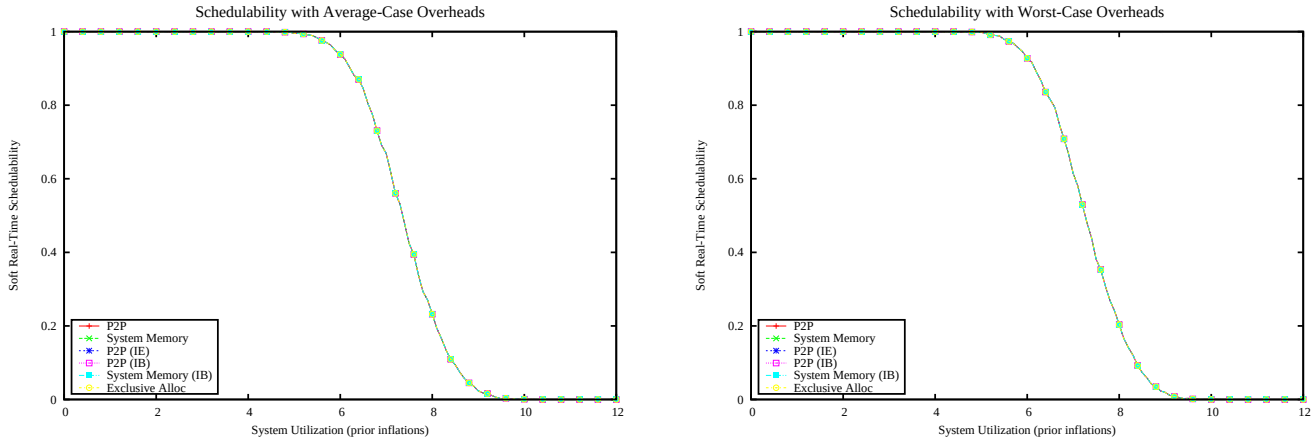

Figure 2970: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

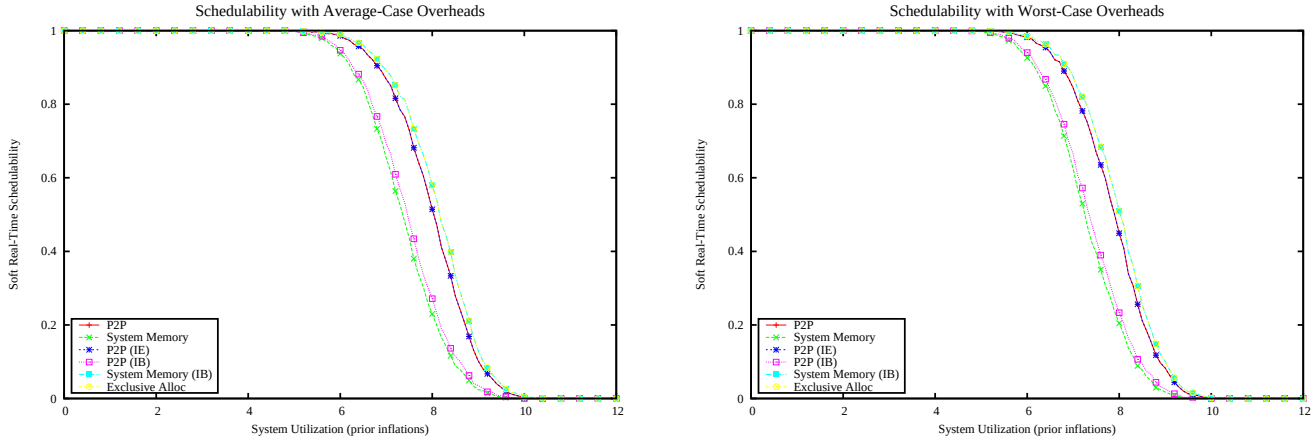

Figure 2971: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

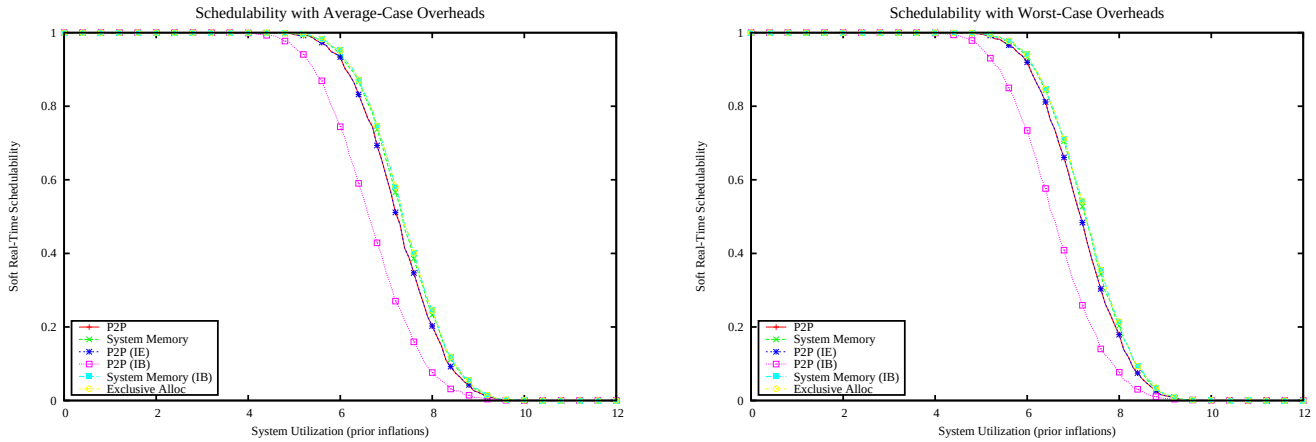

Figure 2972: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

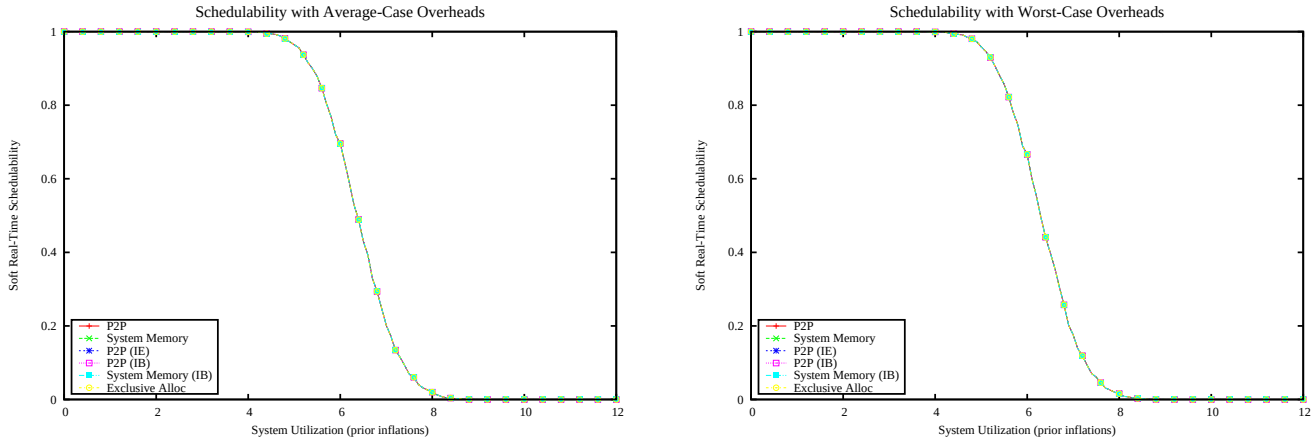

Figure 2973: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

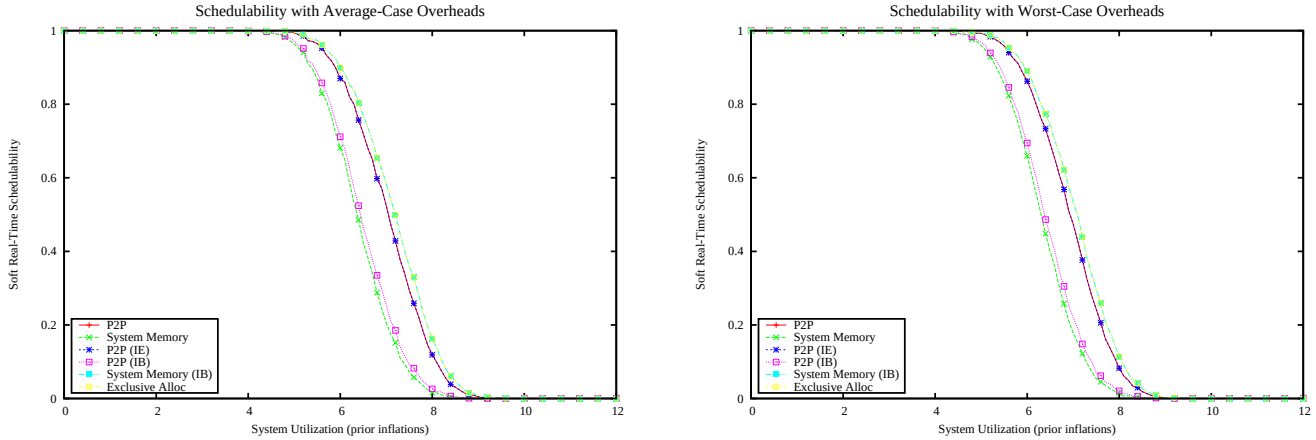

Figure 2974: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

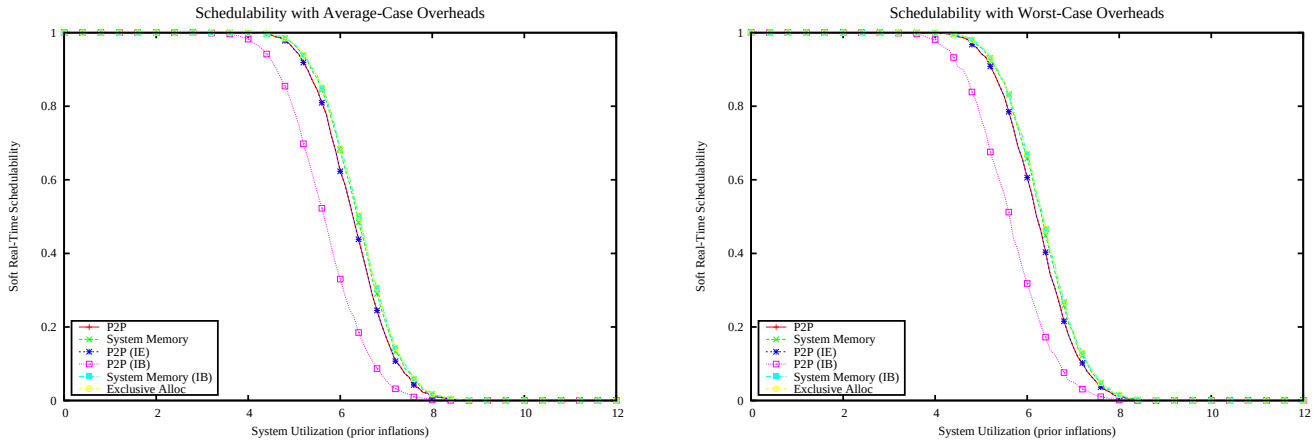

Figure 2975: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

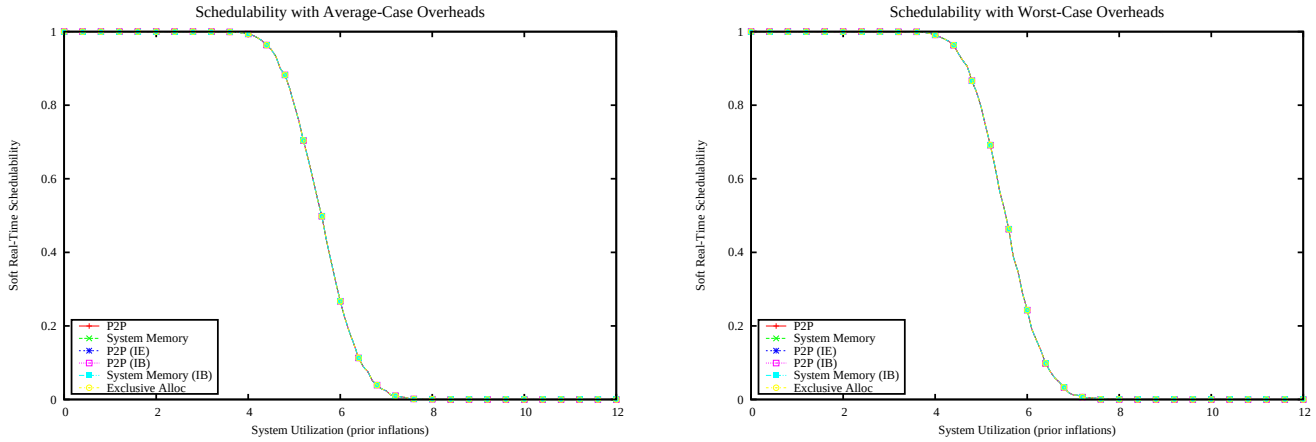

Figure 2976: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

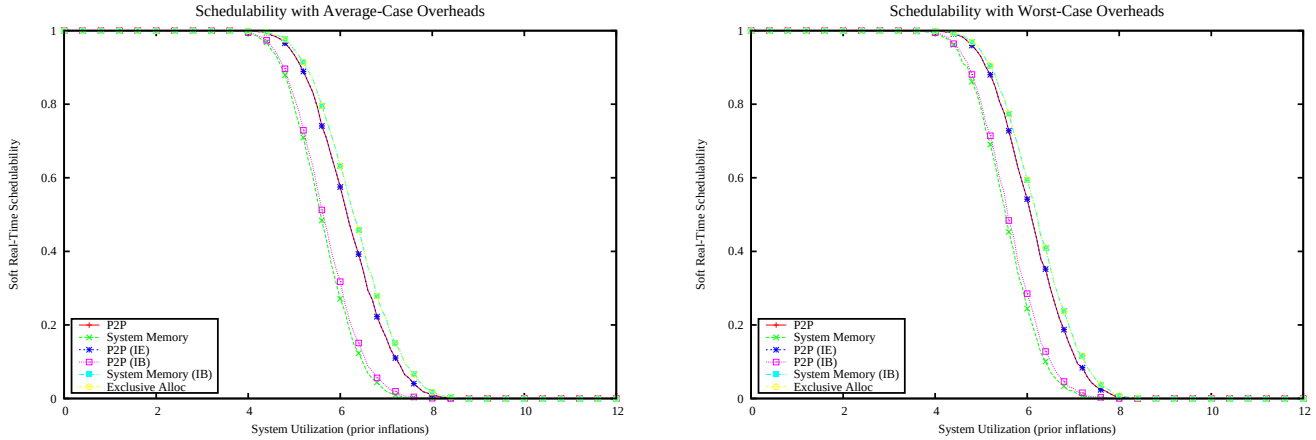

Figure 2977: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

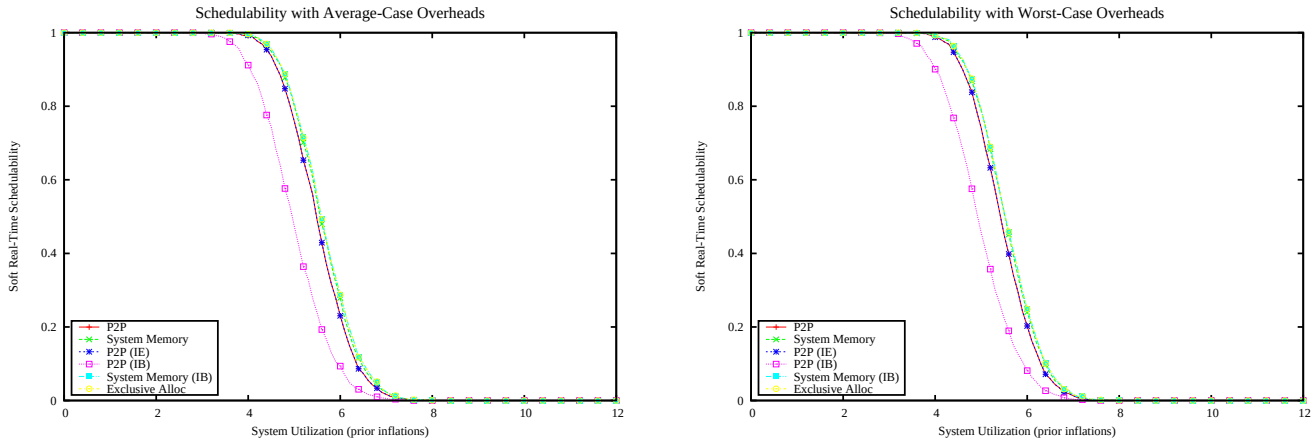

Figure 2978: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

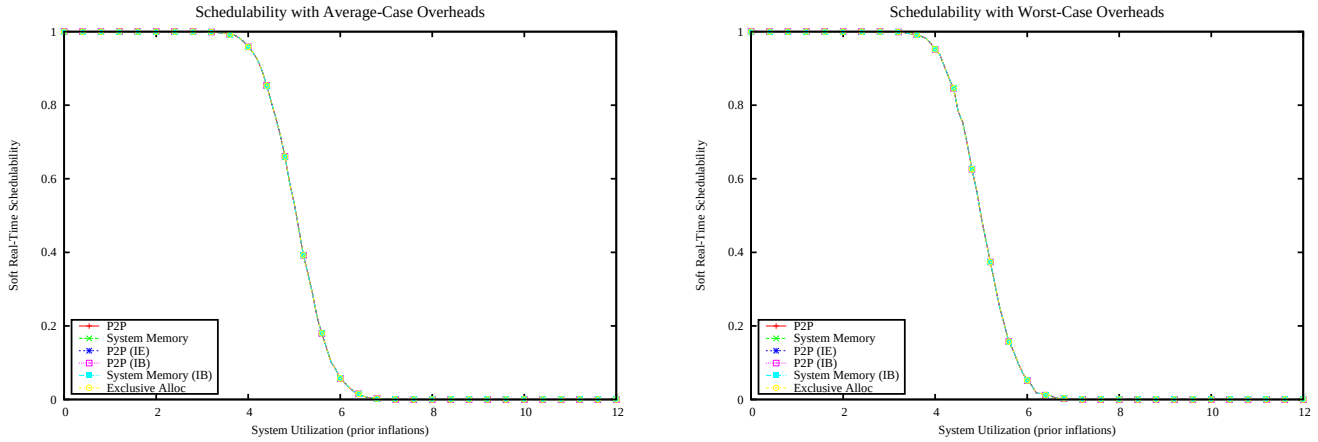

Figure 2979: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

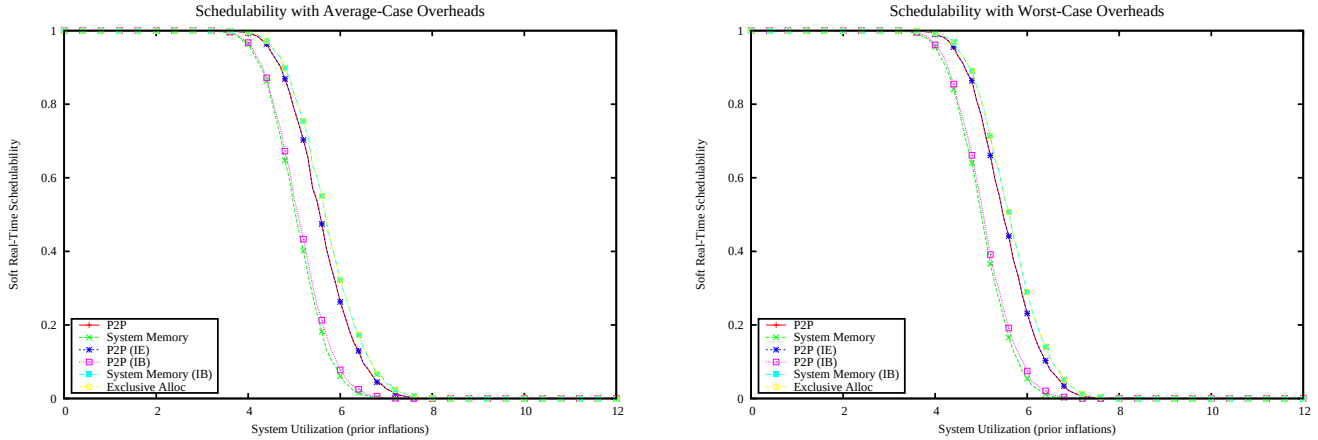

Figure 2980: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

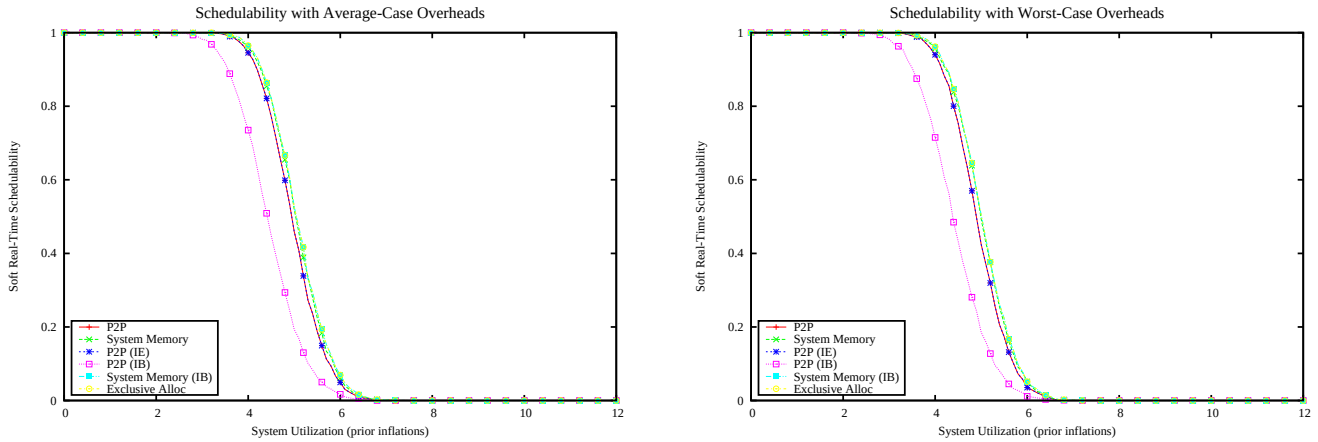

Figure 2981: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

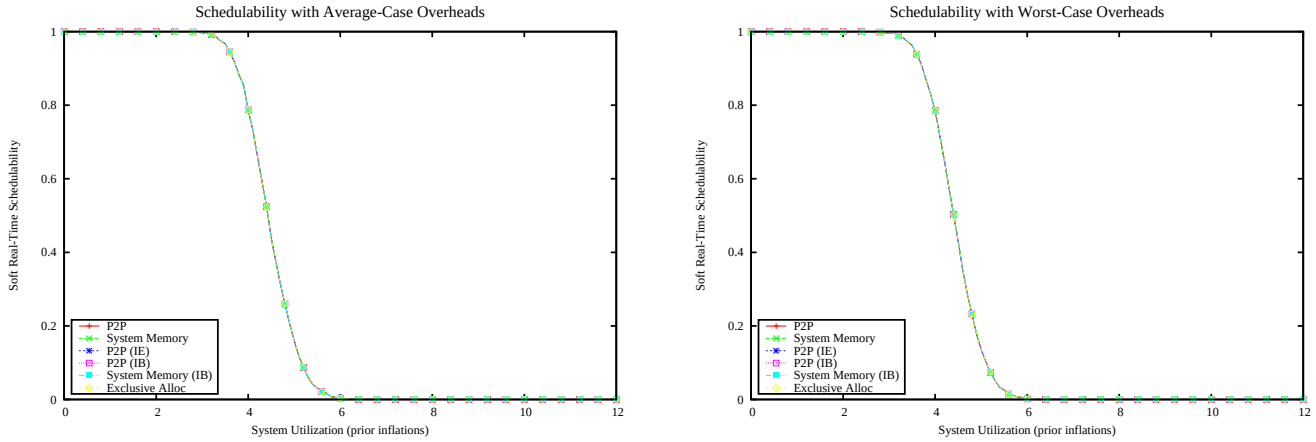

Figure 2982: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

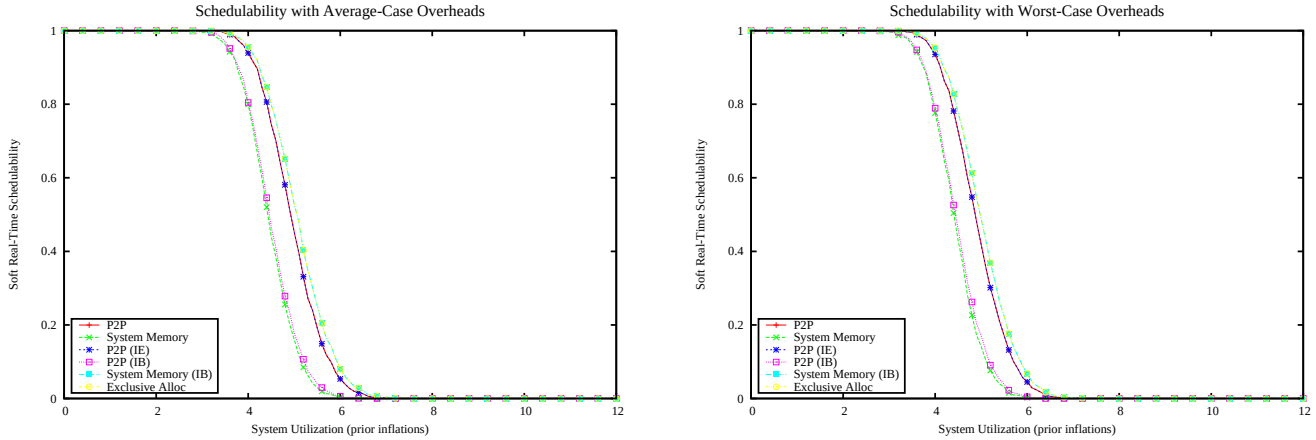

Figure 2983: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

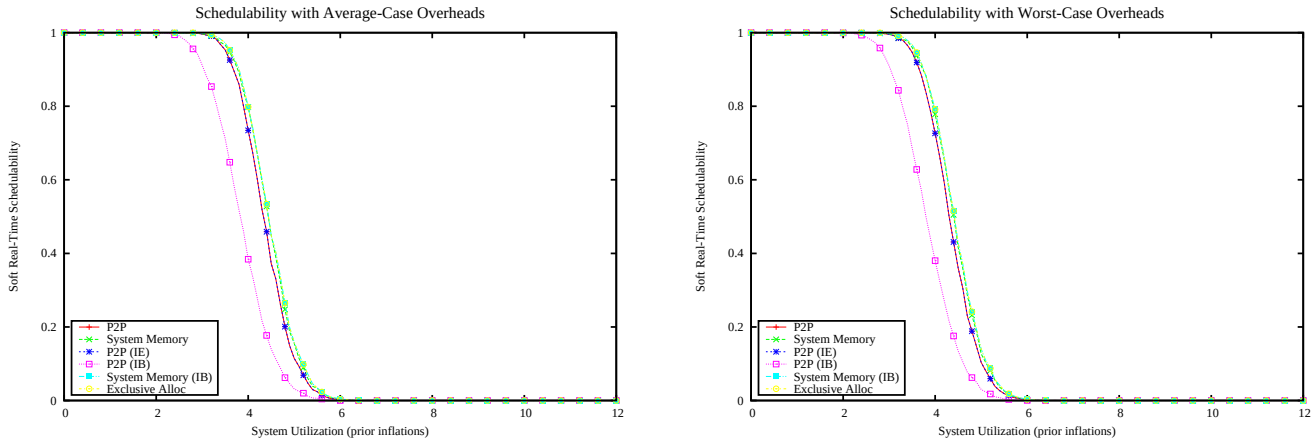

Figure 2984: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

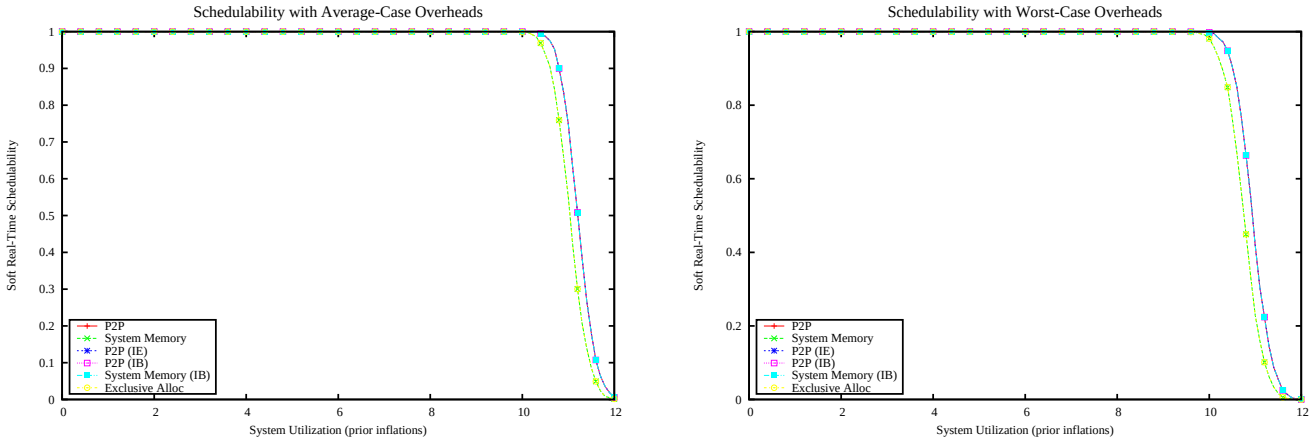

Figure 2985: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

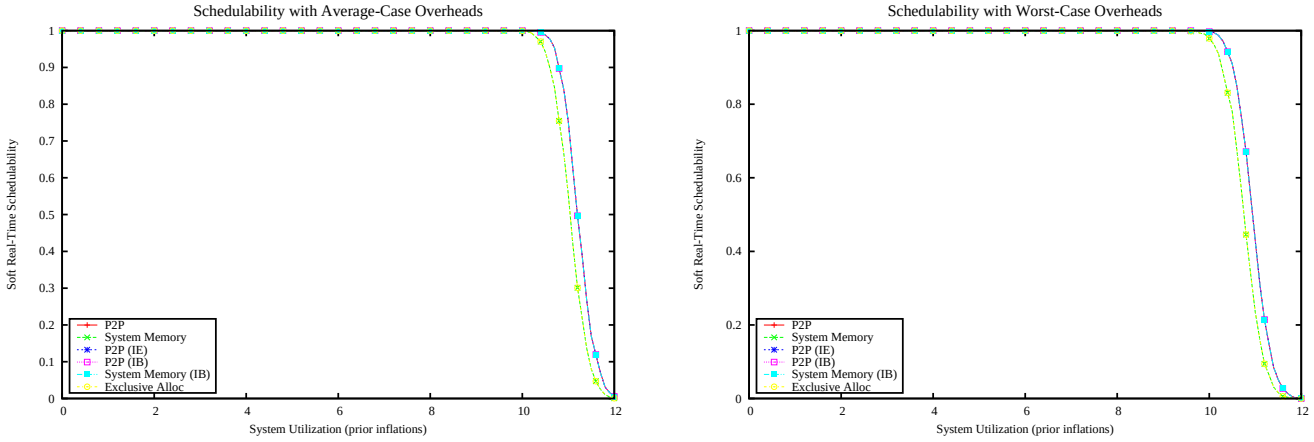

Figure 2986: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

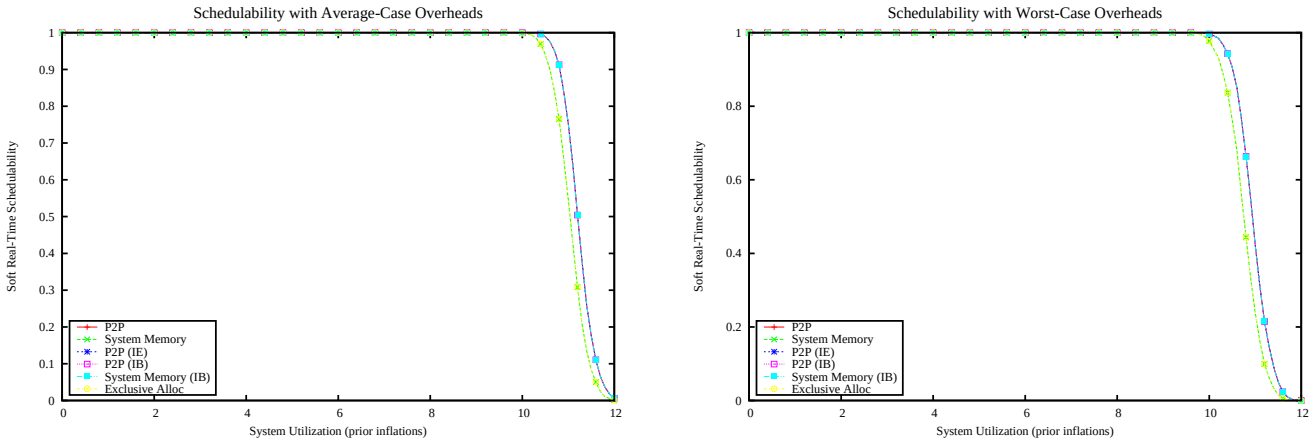

Figure 2987: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

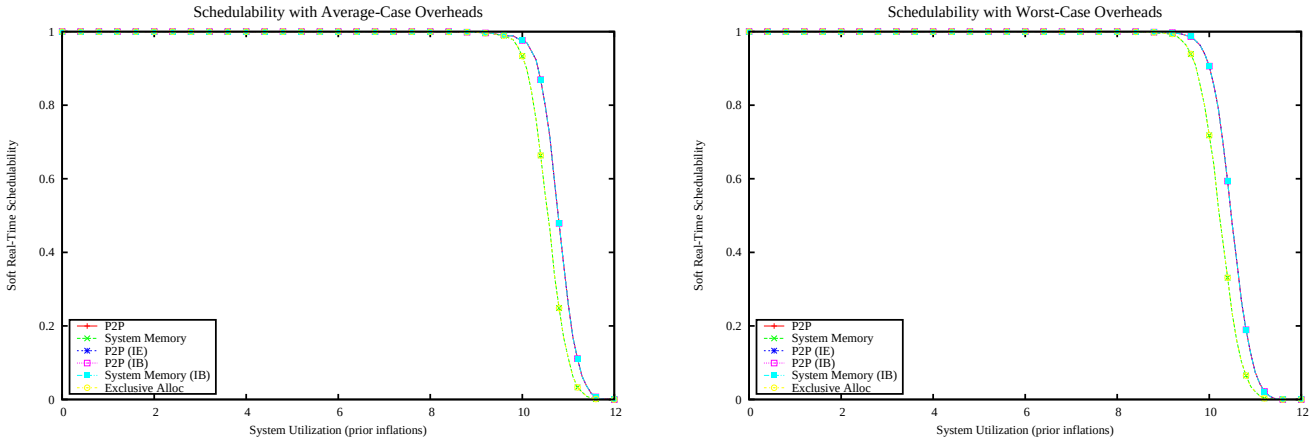

Figure 2988: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

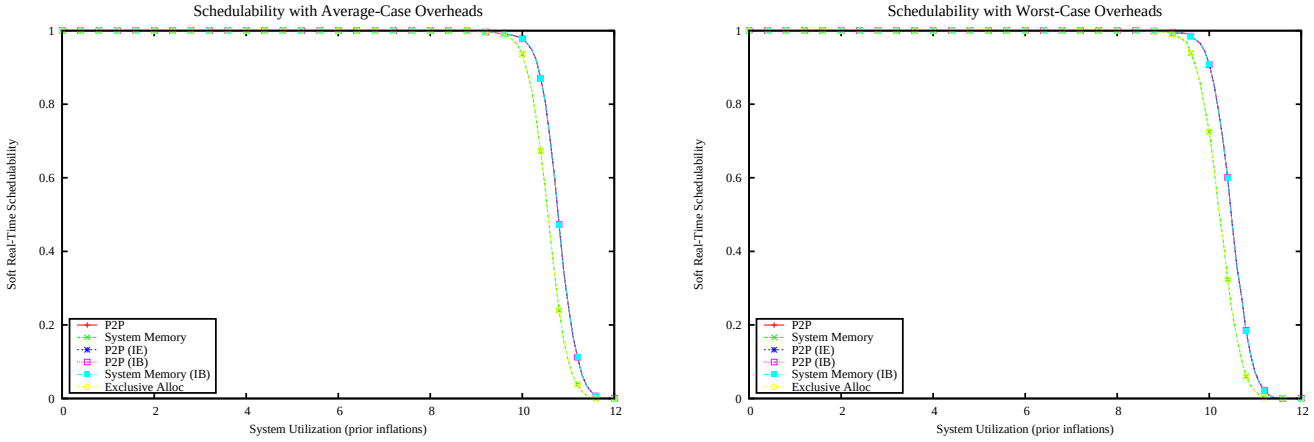

Figure 2989: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

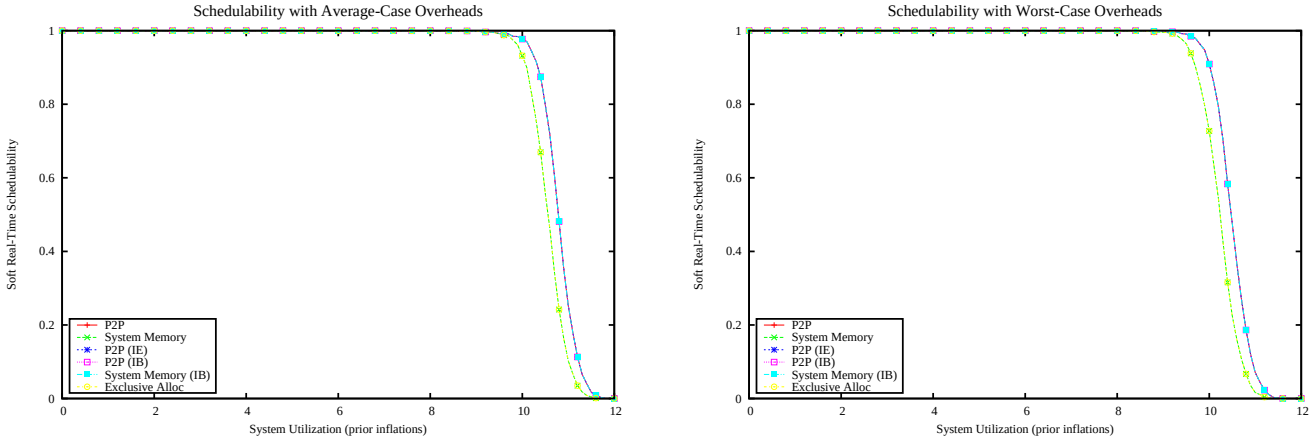

Figure 2990: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

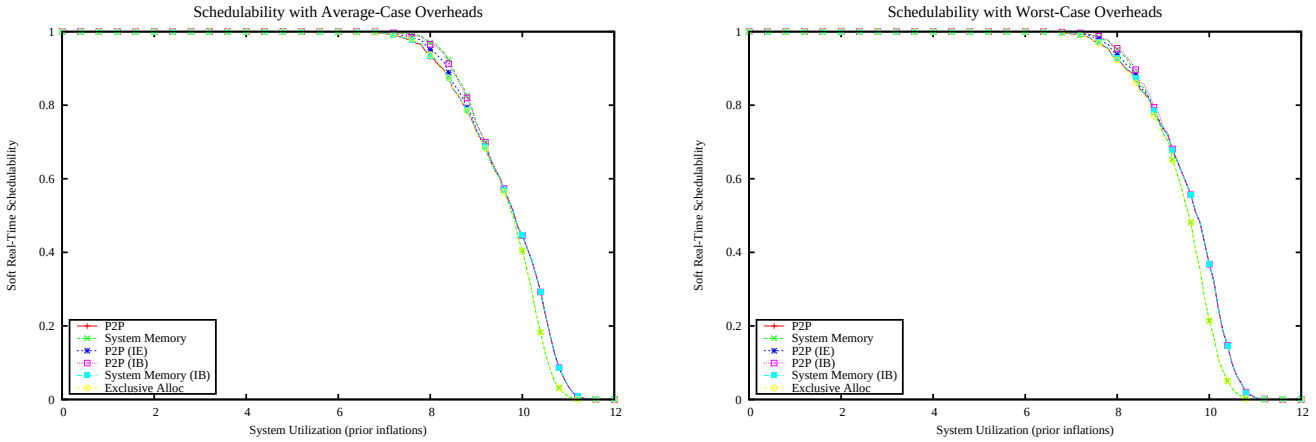

Figure 2991: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

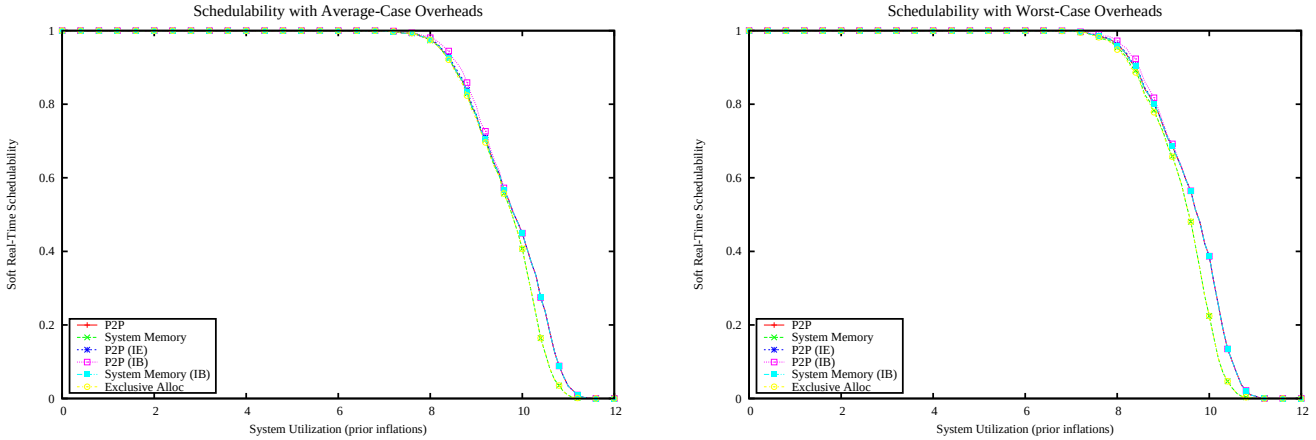

Figure 2992: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

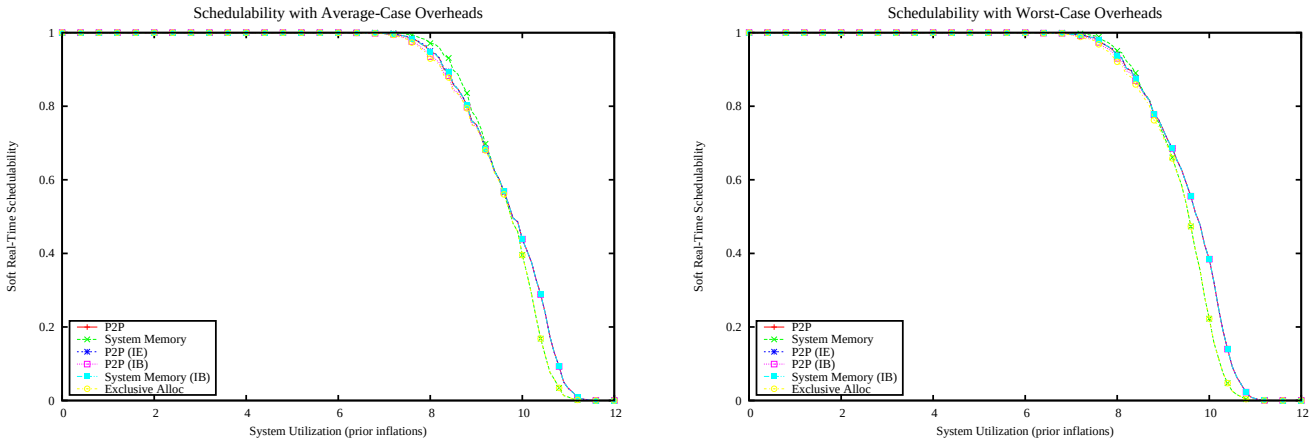

Figure 2993: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

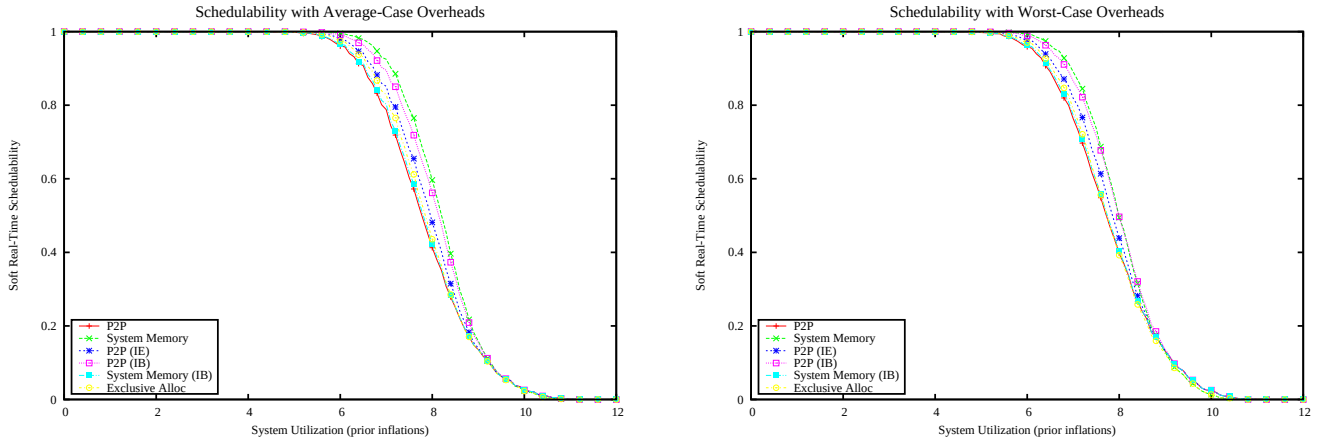

Figure 2994: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

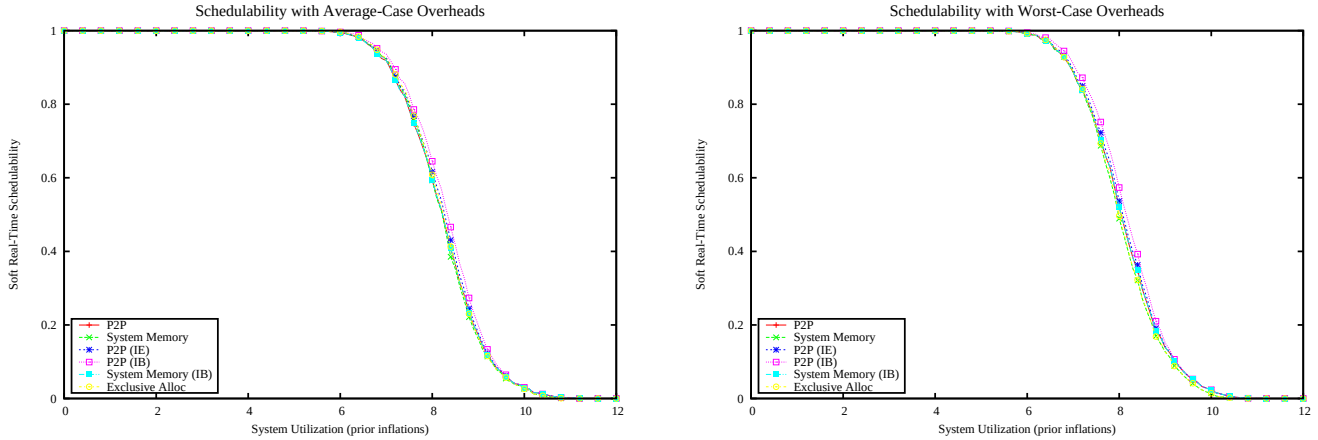

Figure 2995: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

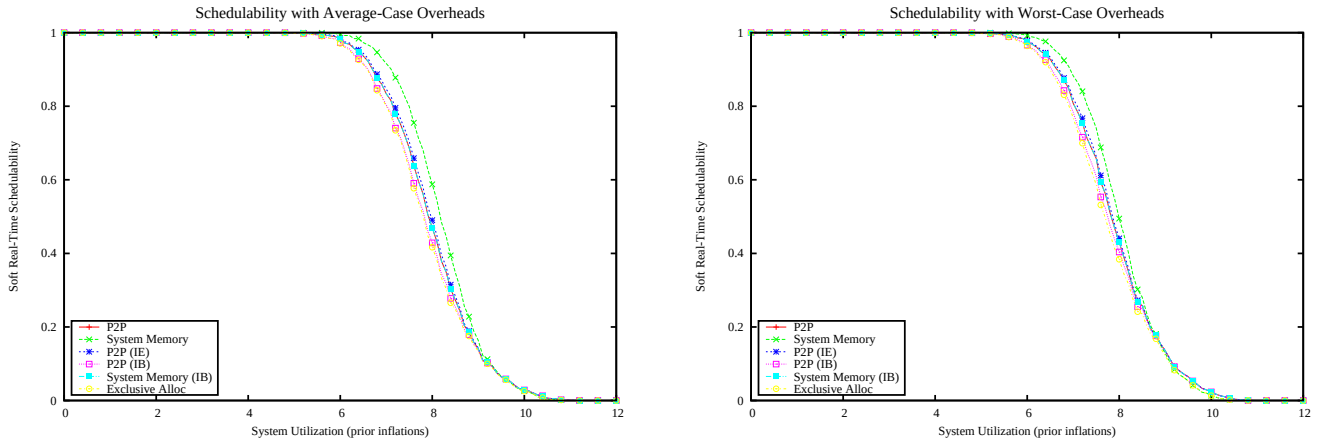

Figure 2996: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

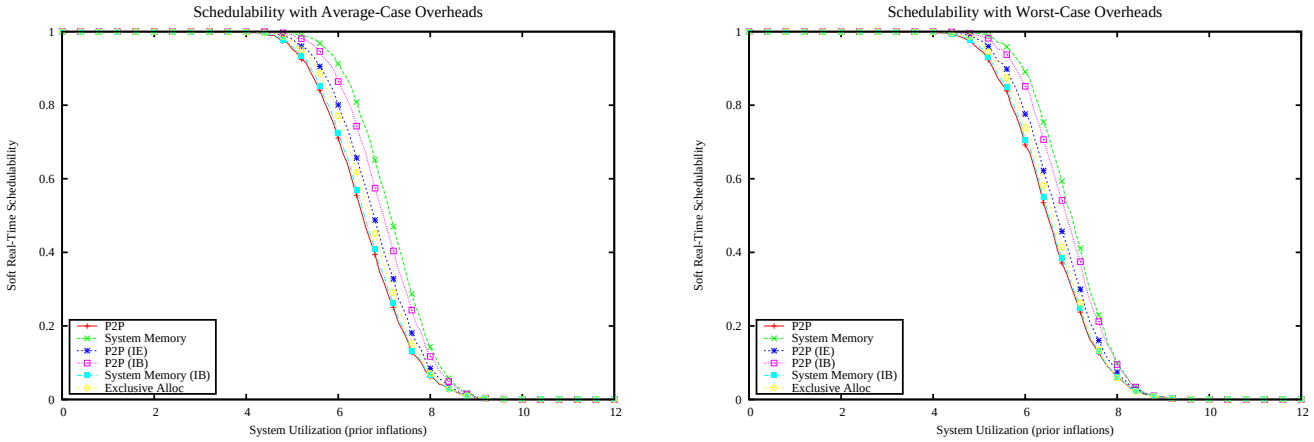

Figure 2997: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

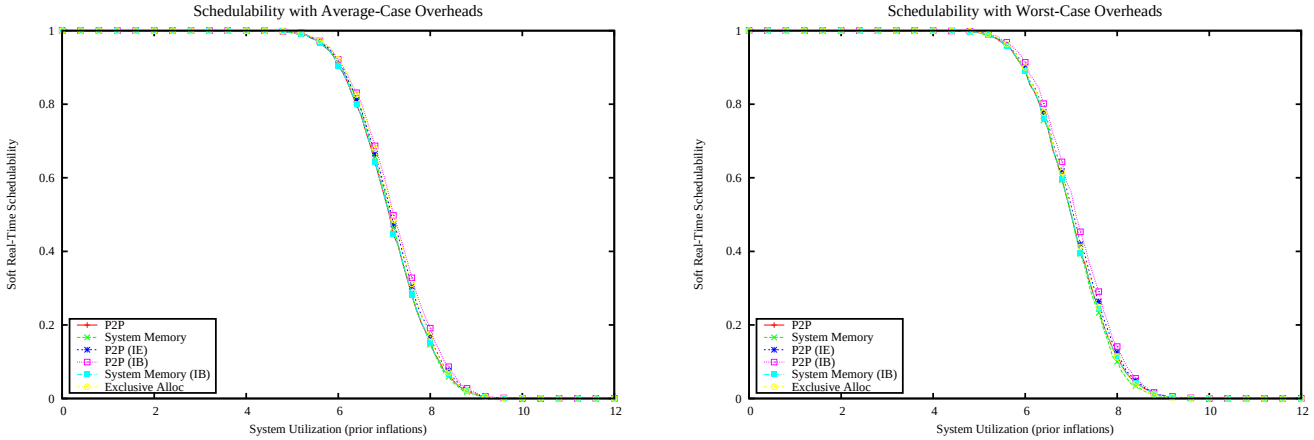

Figure 2998: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

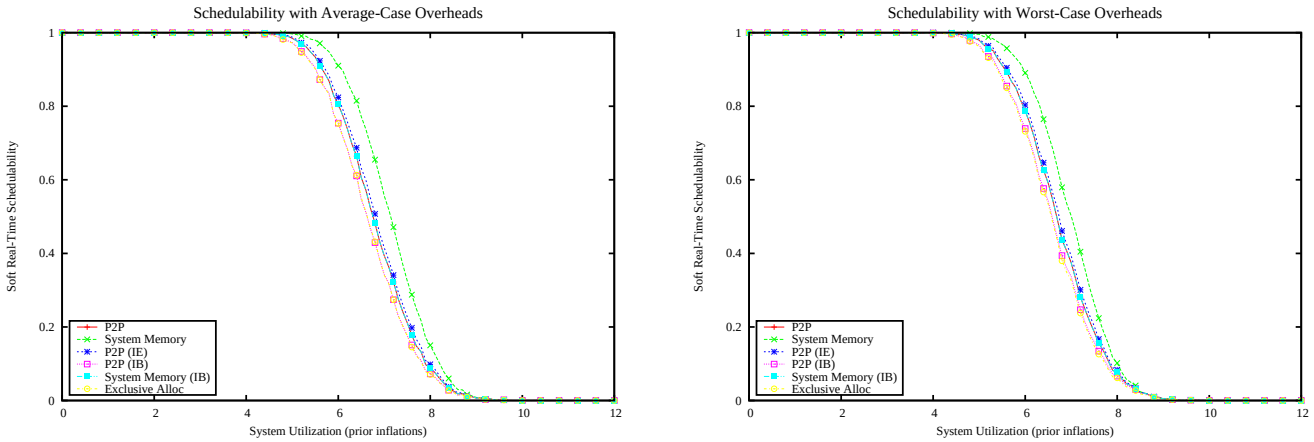

Figure 2999: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

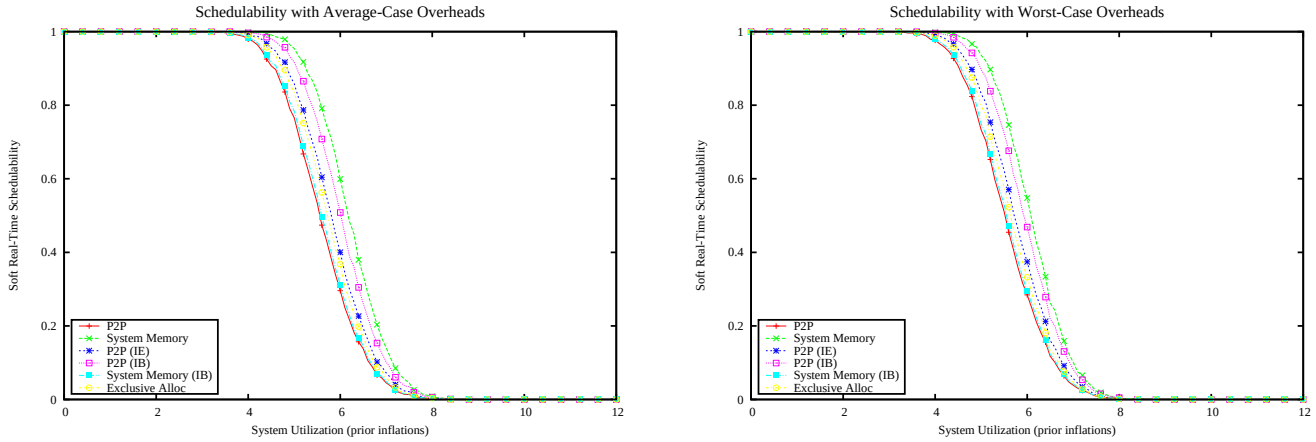

Figure 3000: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

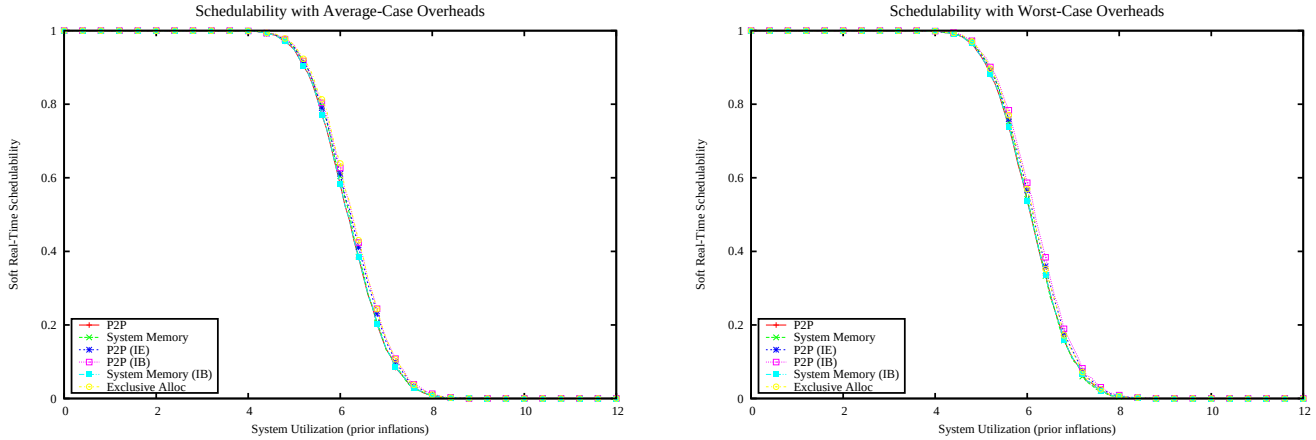

Figure 3001: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

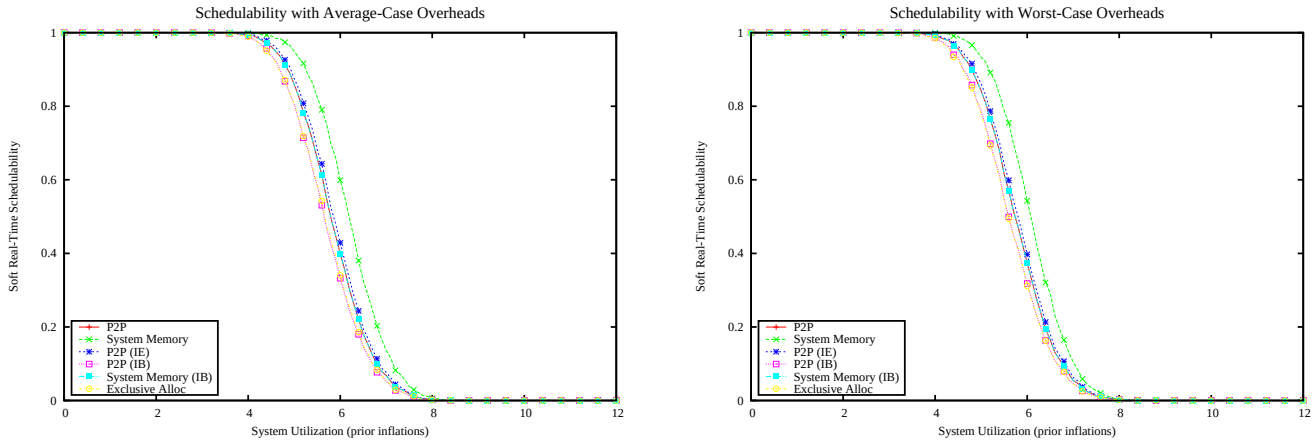

Figure 3002: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

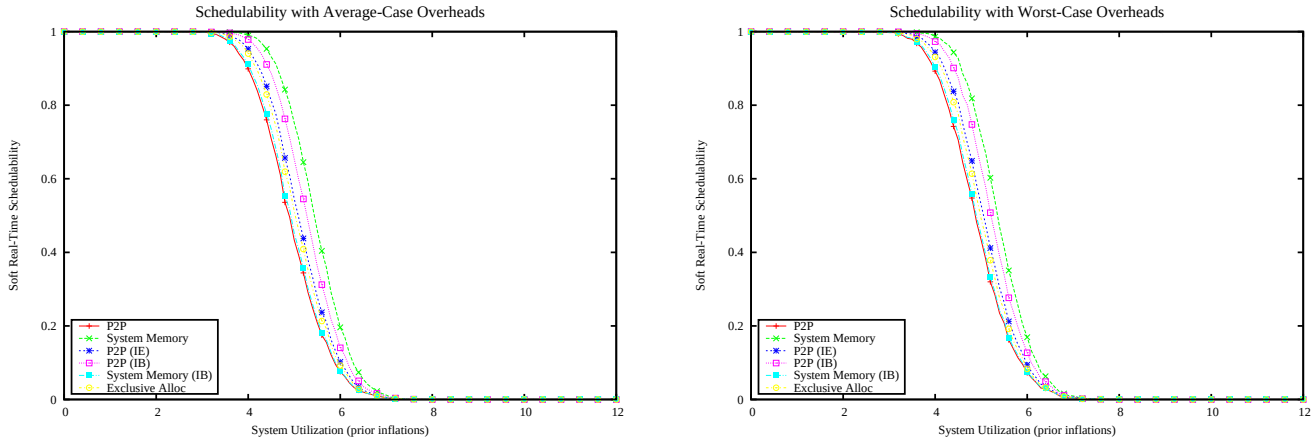

Figure 3003: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

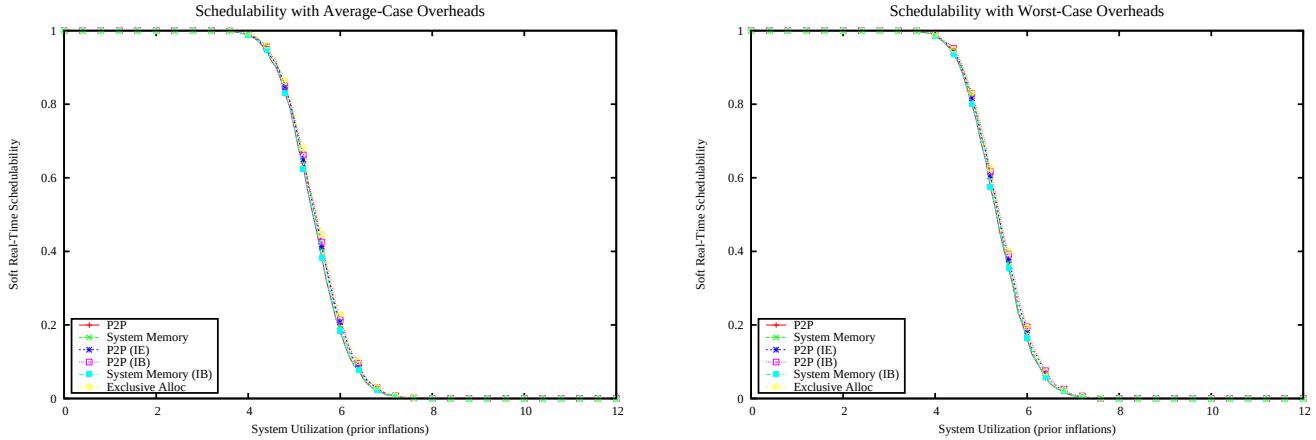

Figure 3004: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

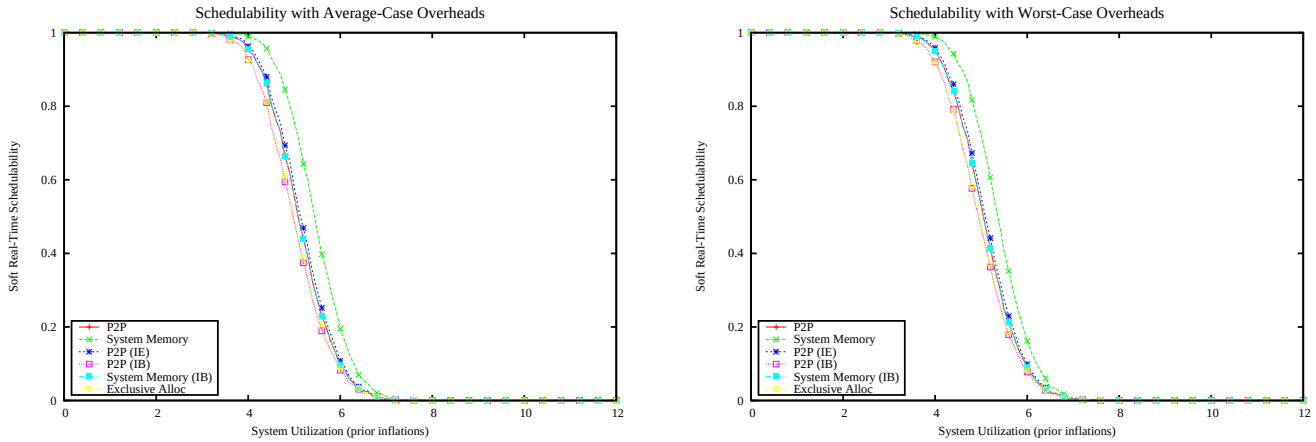

Figure 3005: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

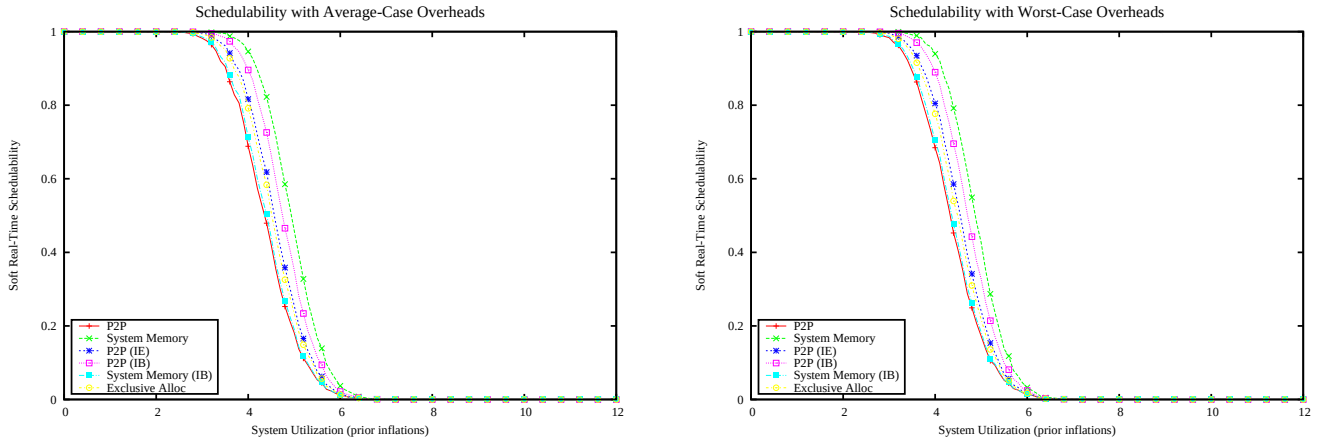

Figure 3006: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

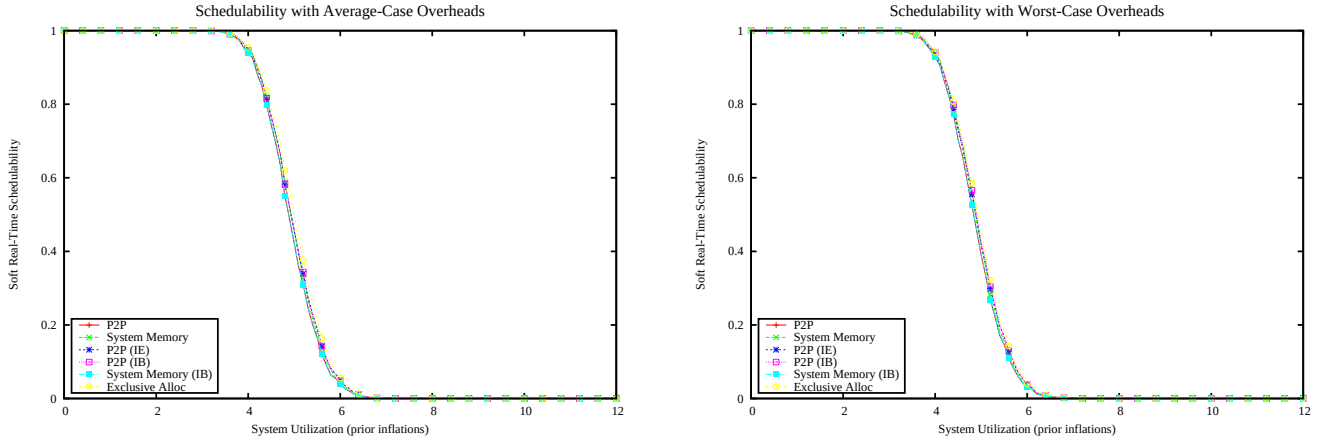

Figure 3007: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

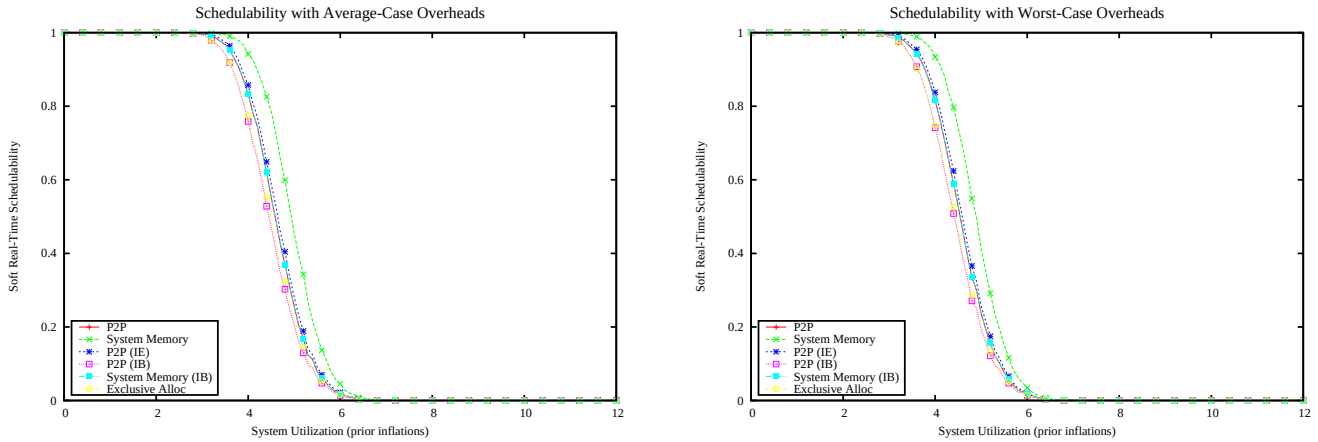

Figure 3008: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

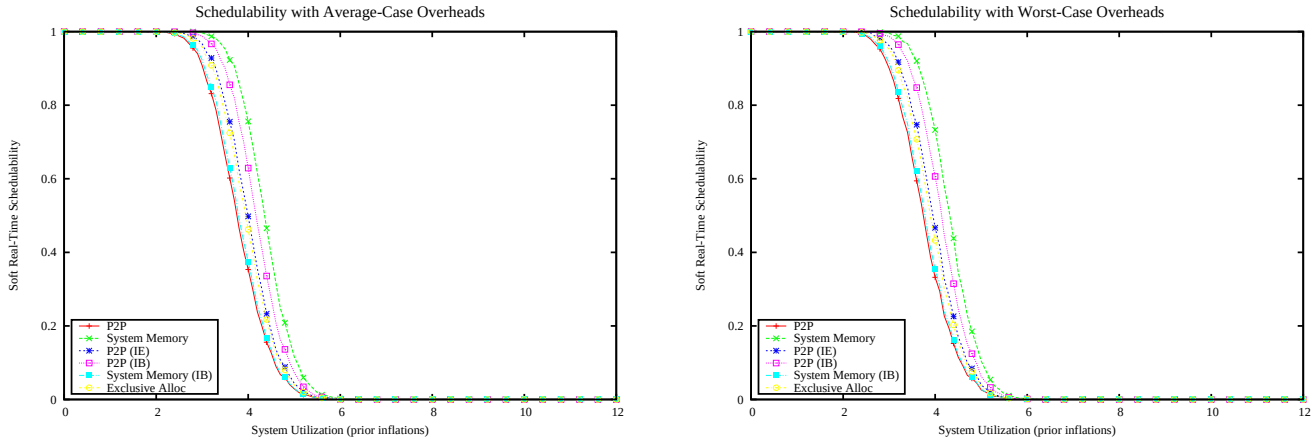

Figure 3009: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

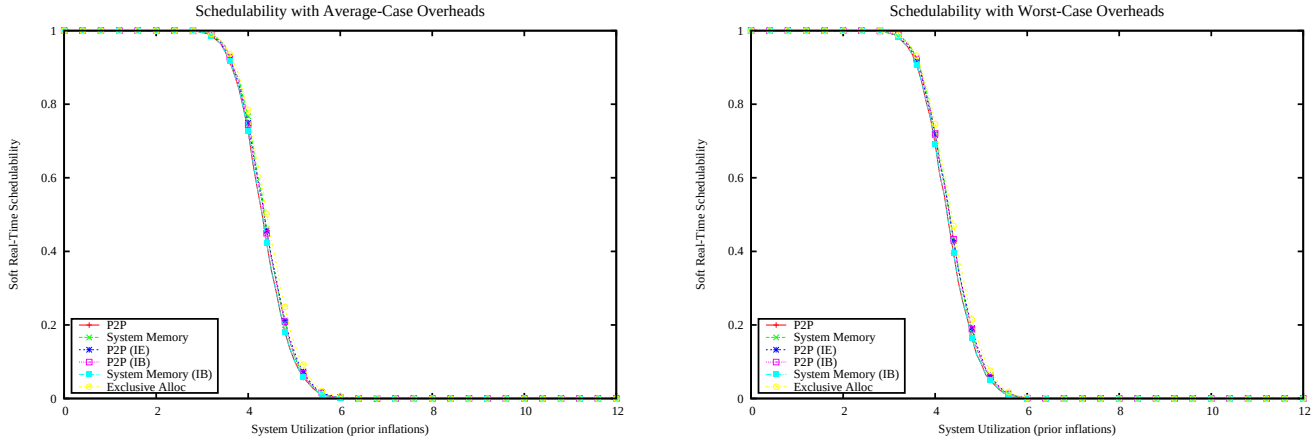

Figure 3010: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

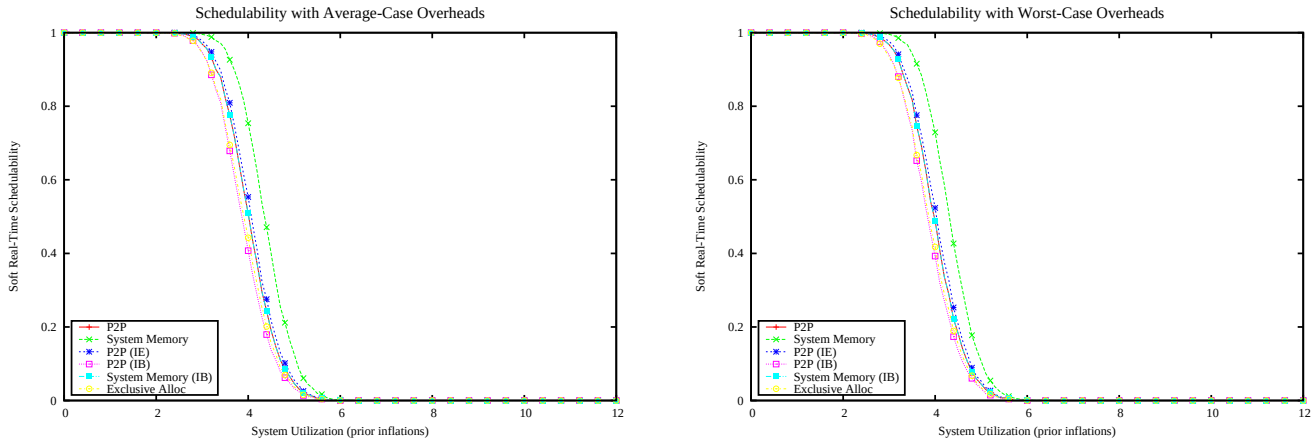

Figure 3011: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

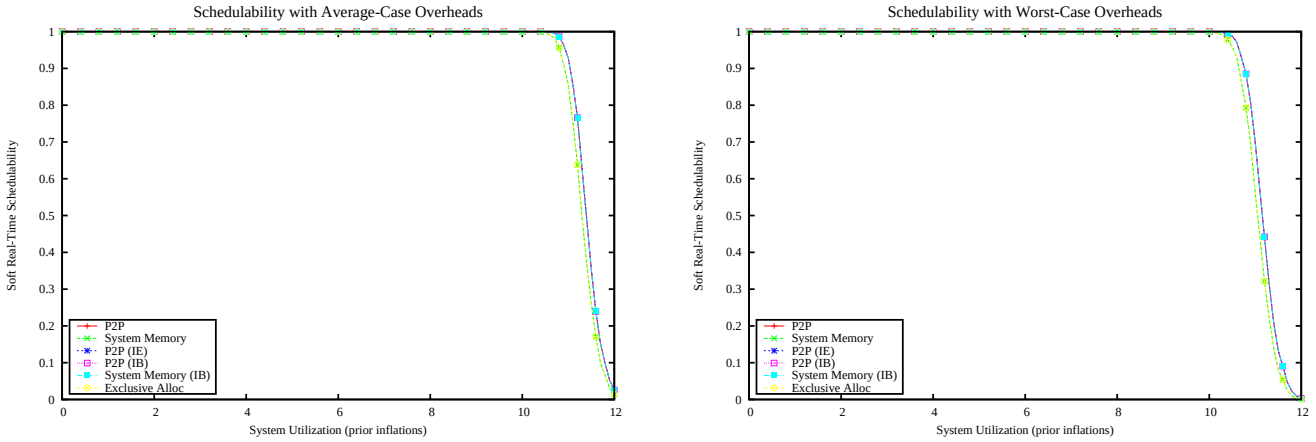

Figure 3012: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

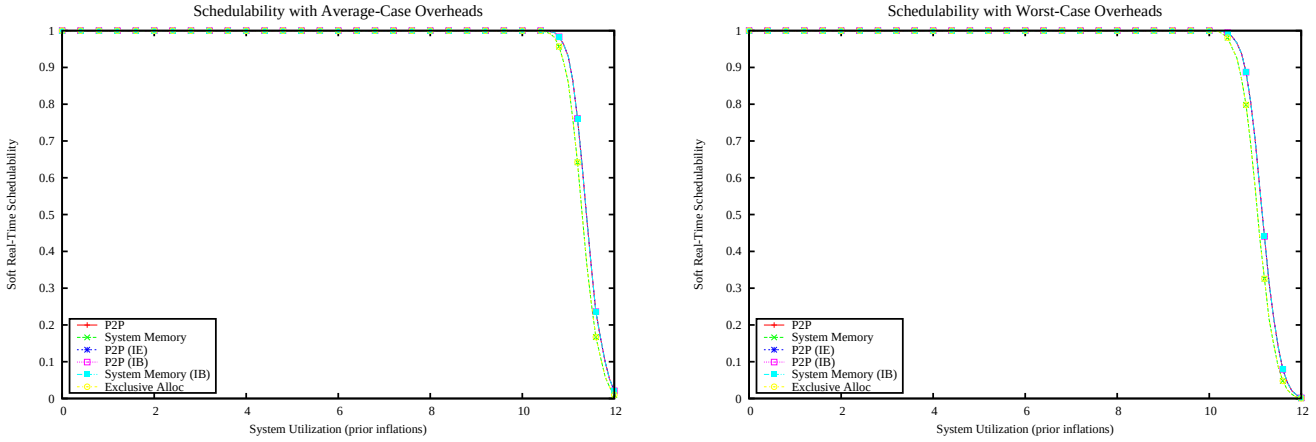

Figure 3013: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

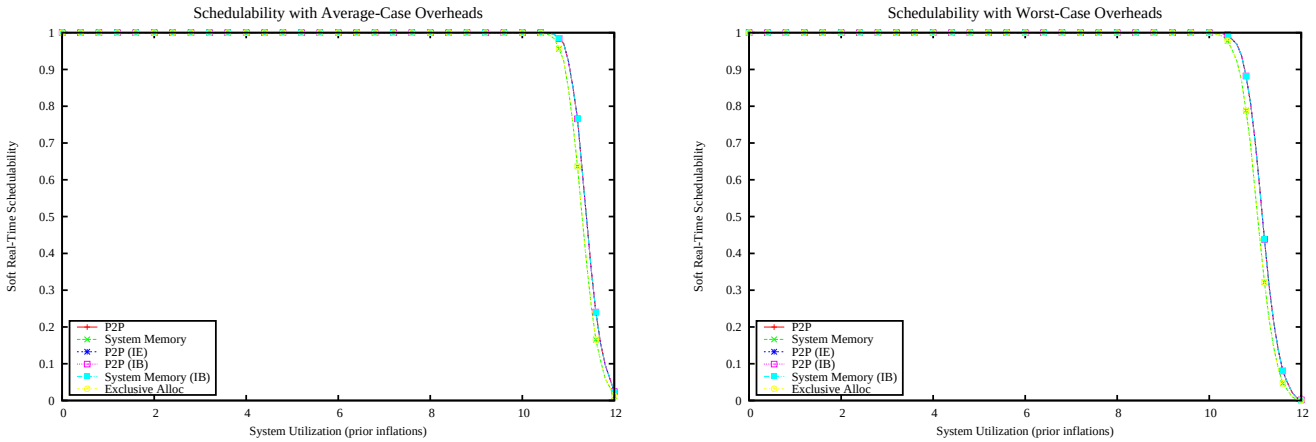

Figure 3014: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

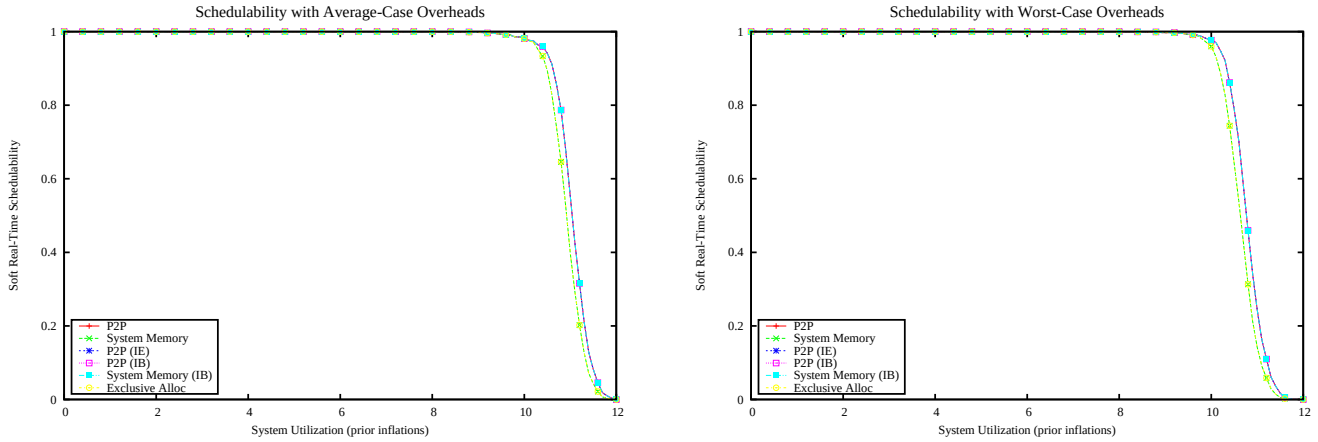

Figure 3015: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

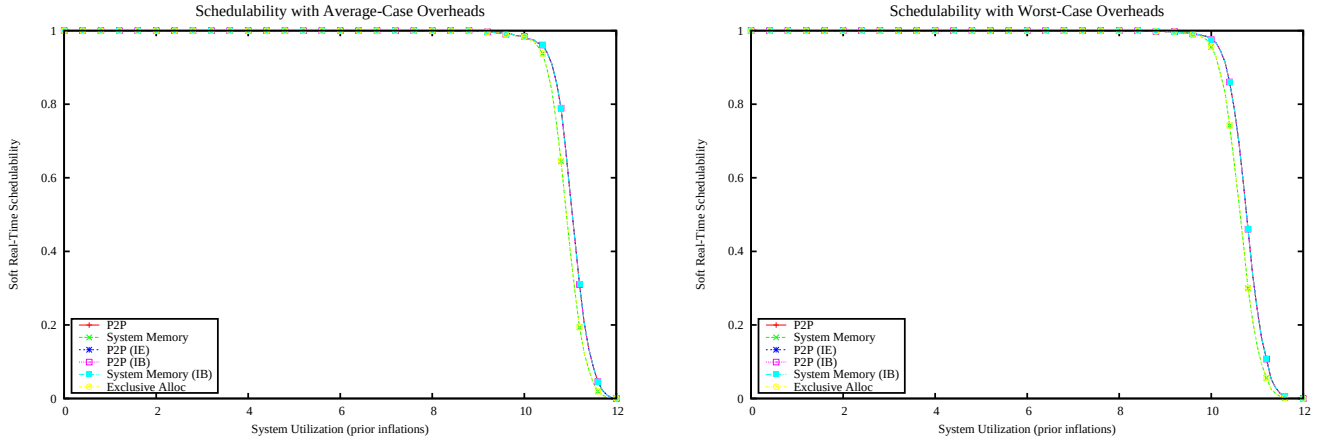

Figure 3016: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

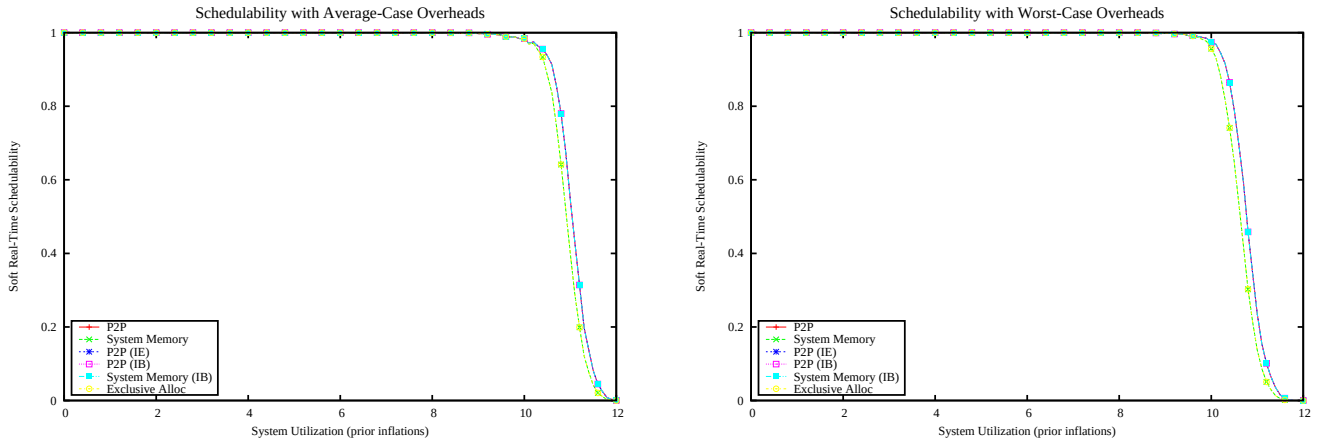

Figure 3017: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

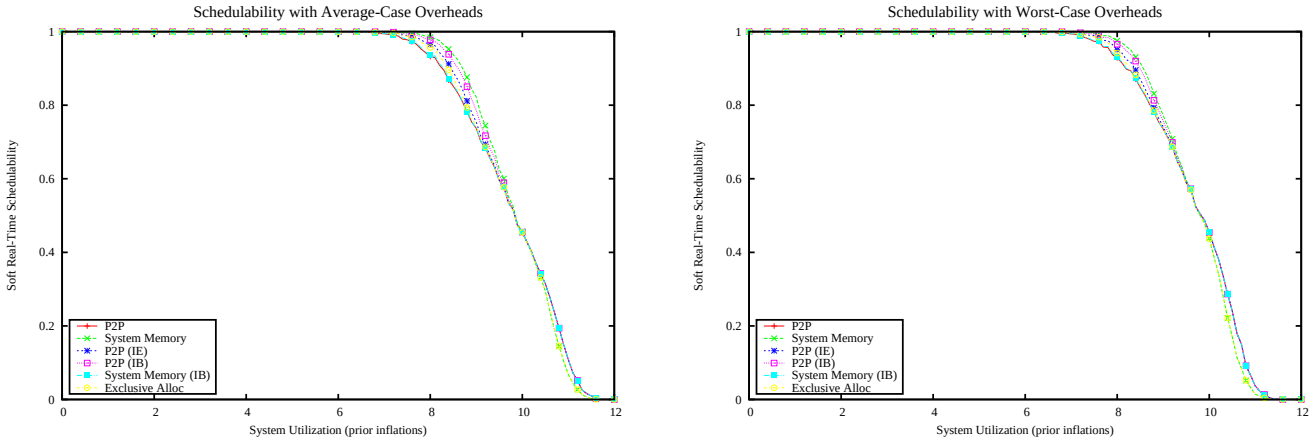

Figure 3018: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

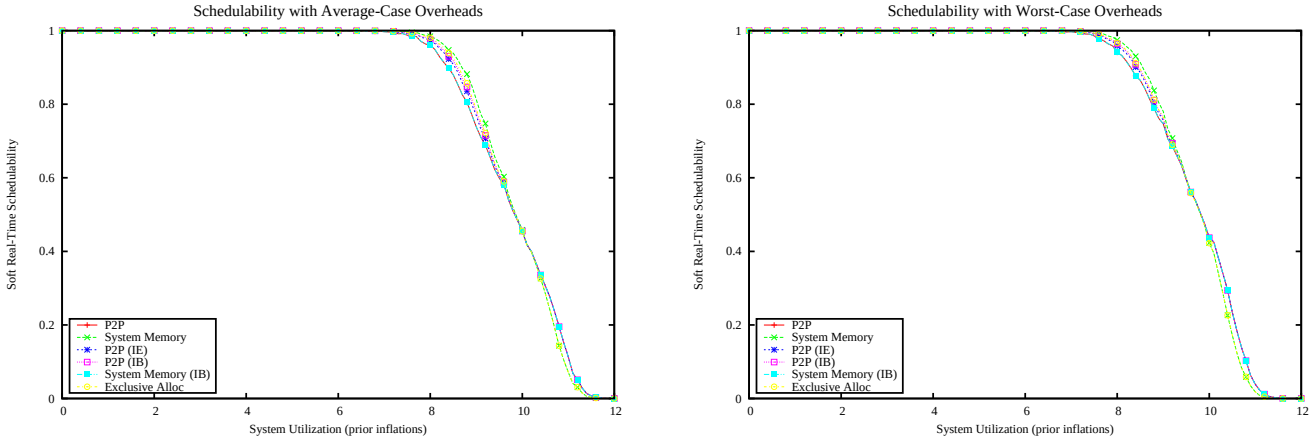

Figure 3019: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

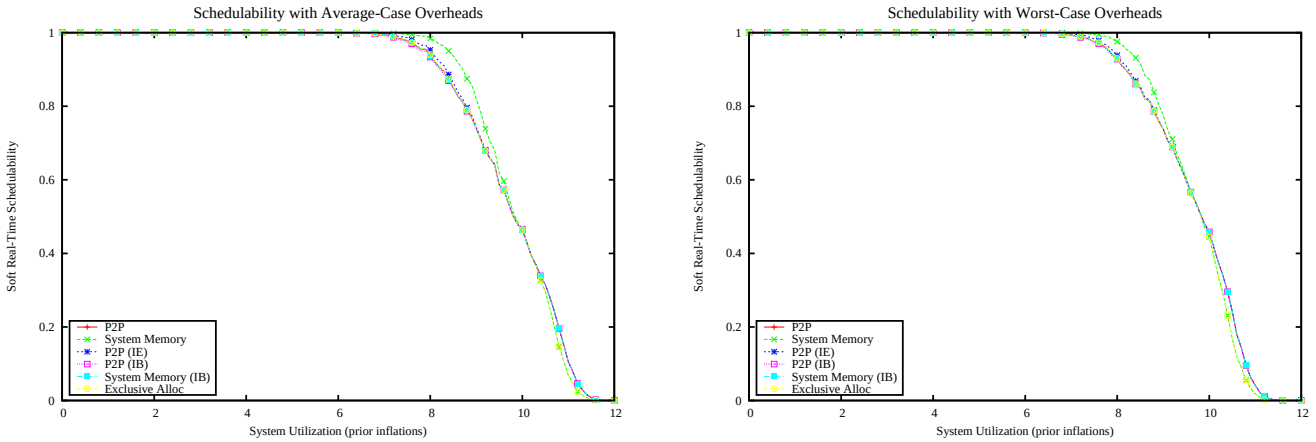

Figure 3020: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

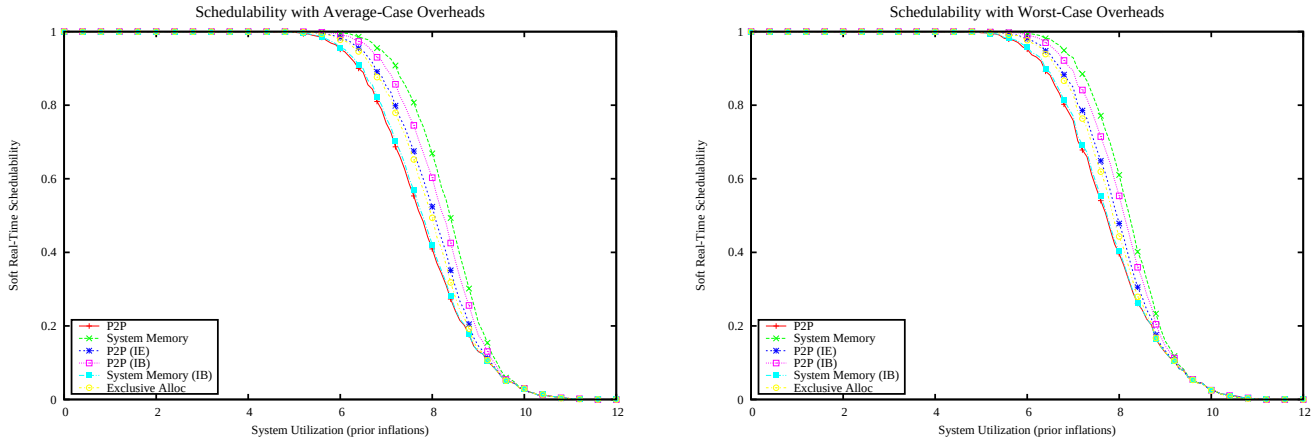

Figure 3021: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

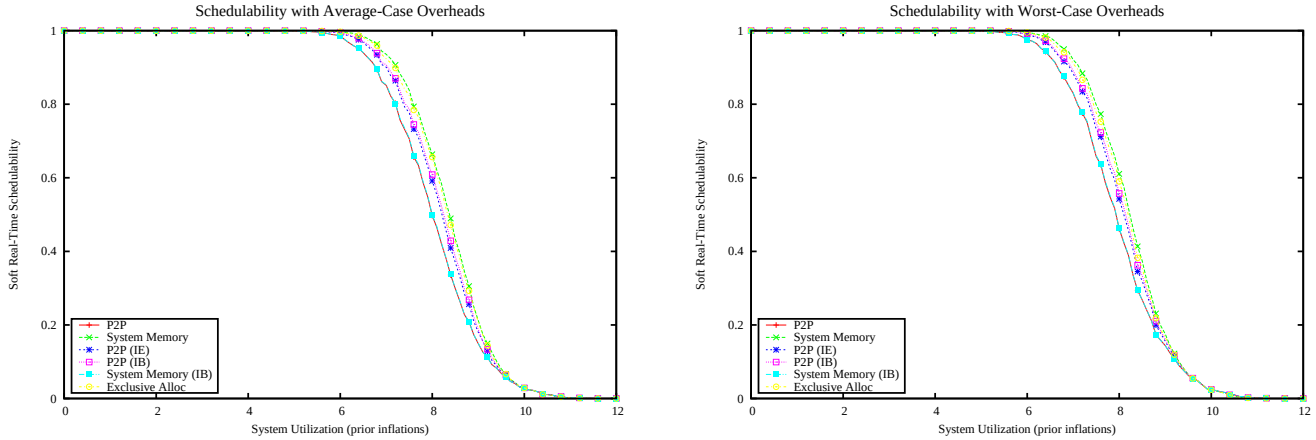

Figure 3022: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

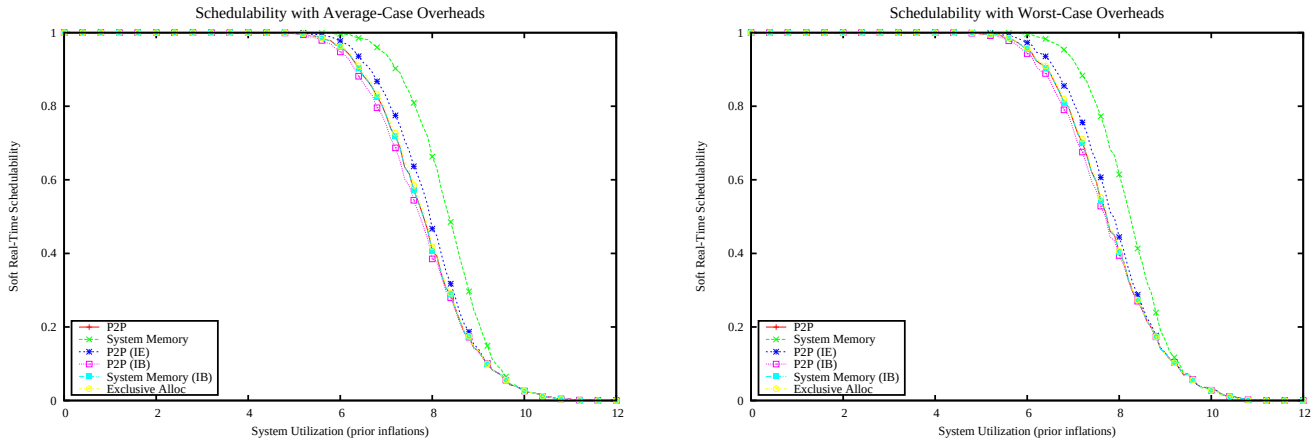

Figure 3023: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

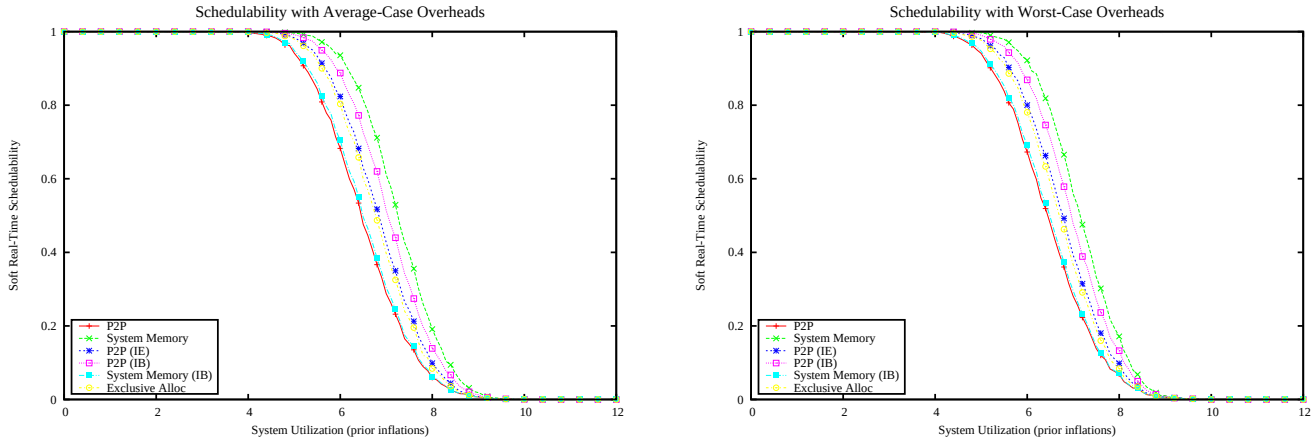

Figure 3024: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

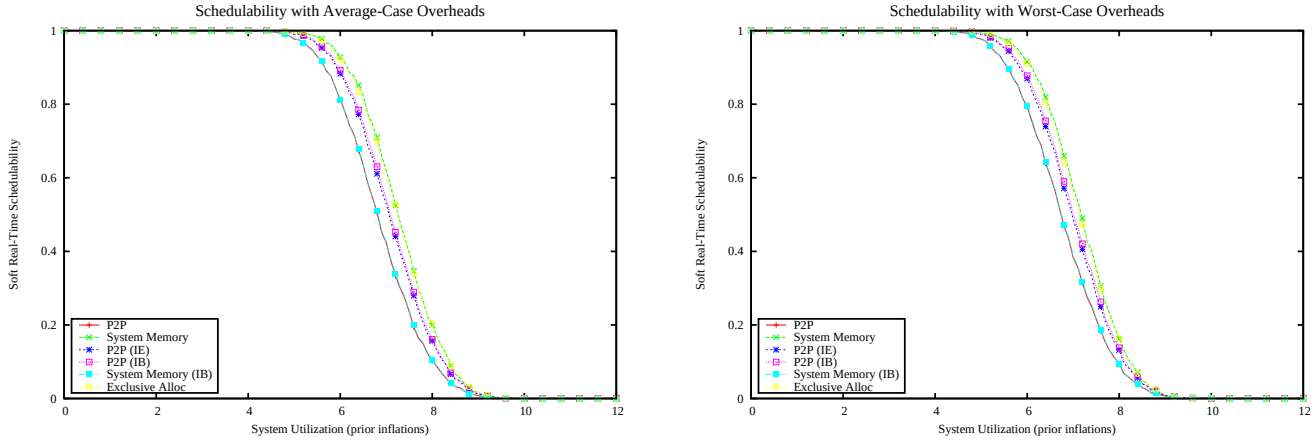

Figure 3025: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

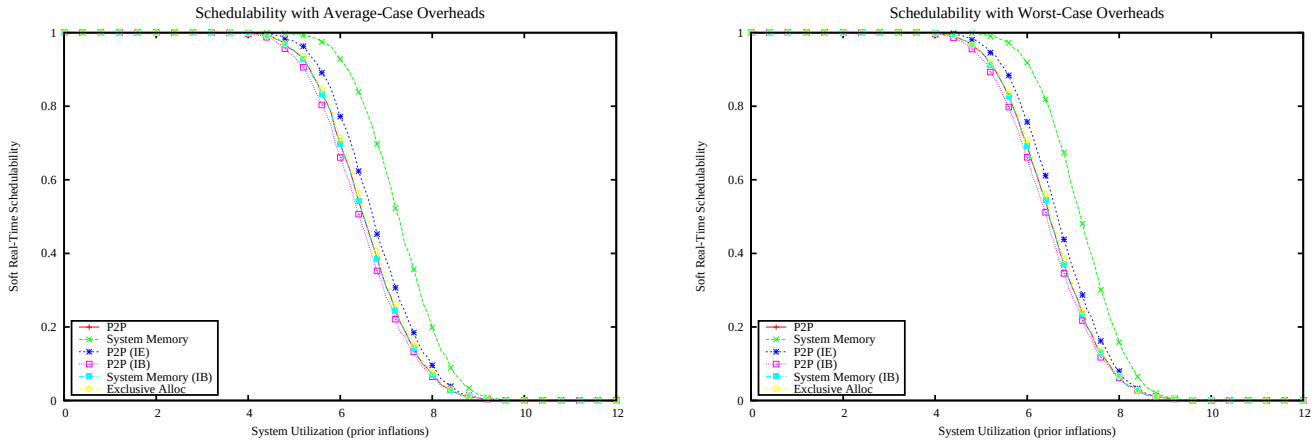

Figure 3026: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

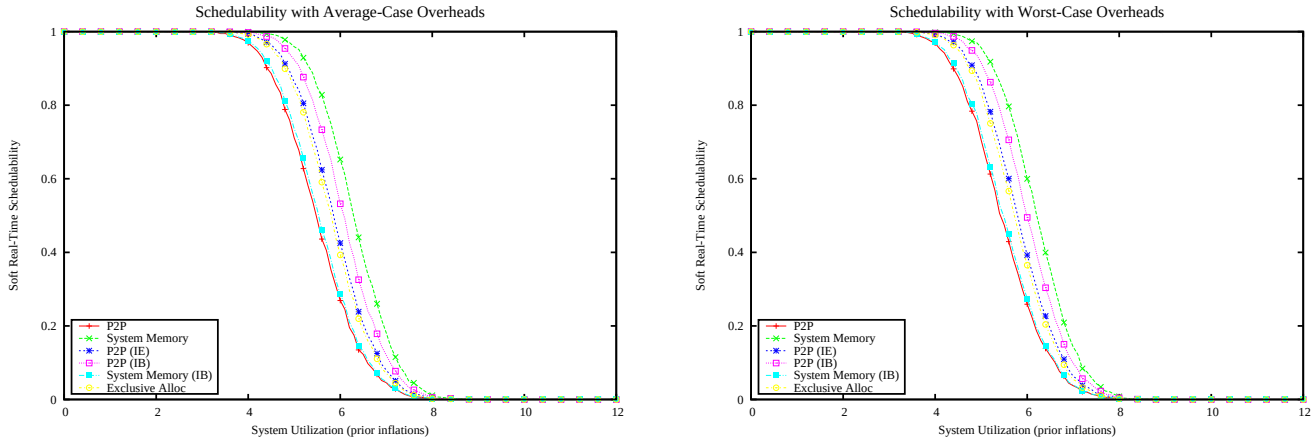

Figure 3027: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

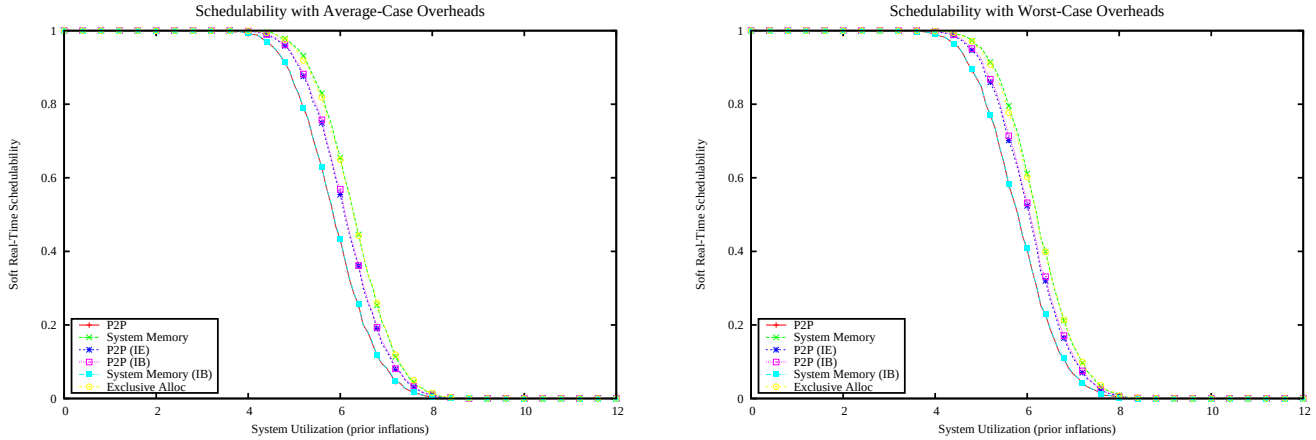

Figure 3028: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

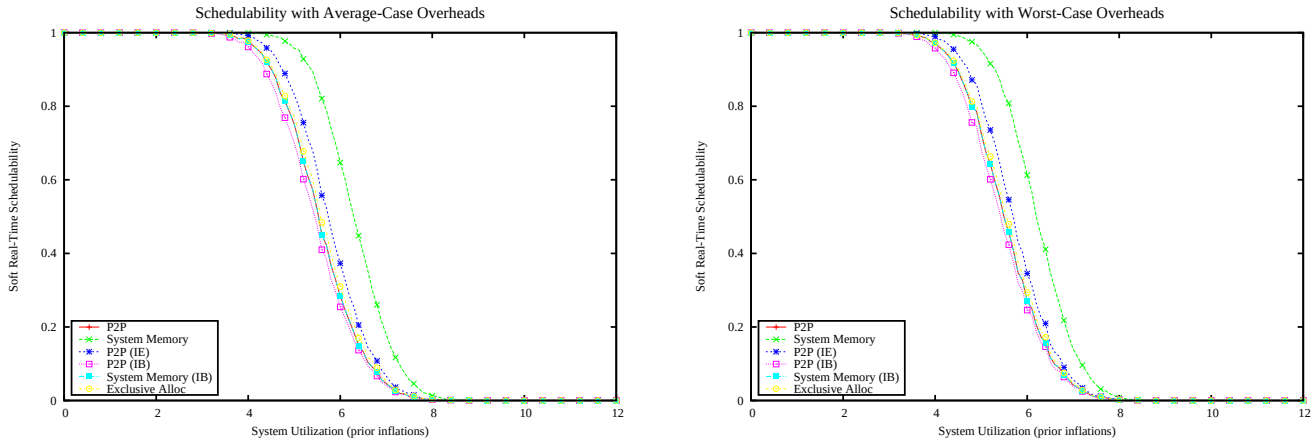

Figure 3029: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

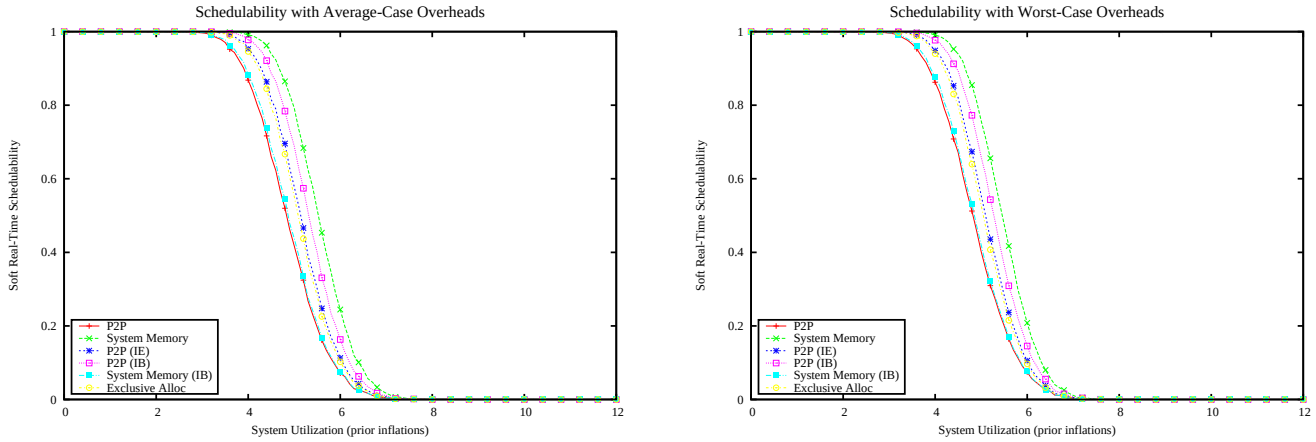

Figure 3030: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

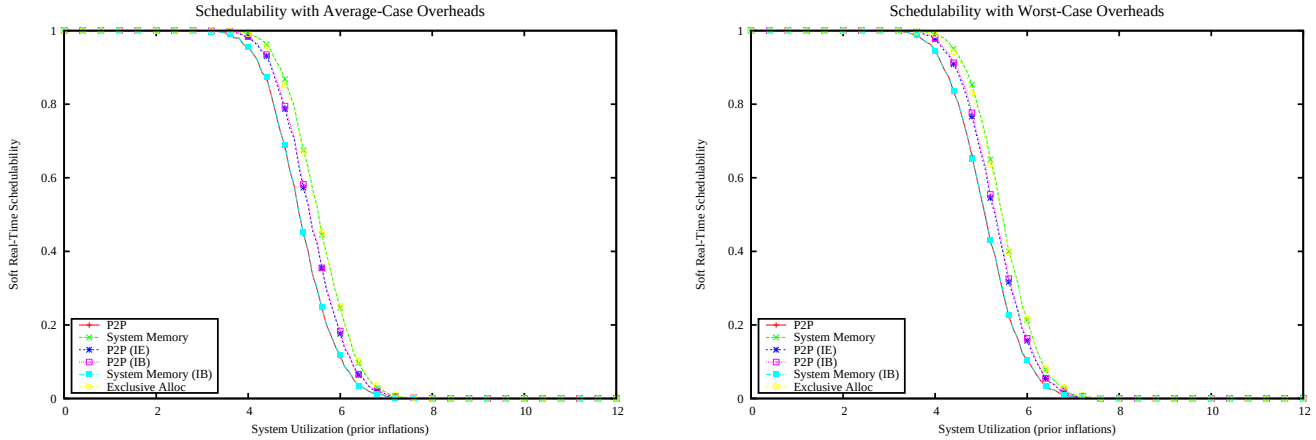

Figure 3031: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

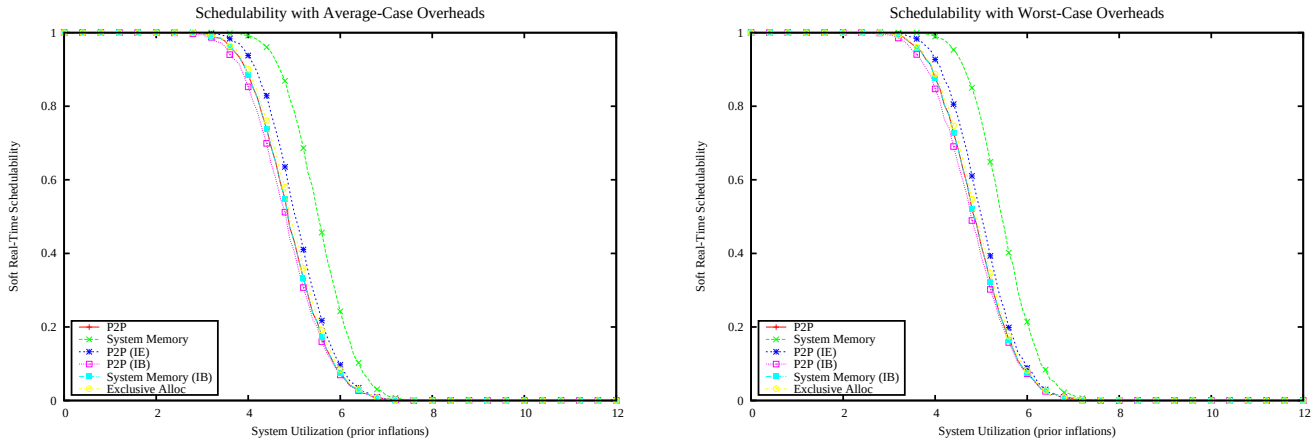

Figure 3032: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

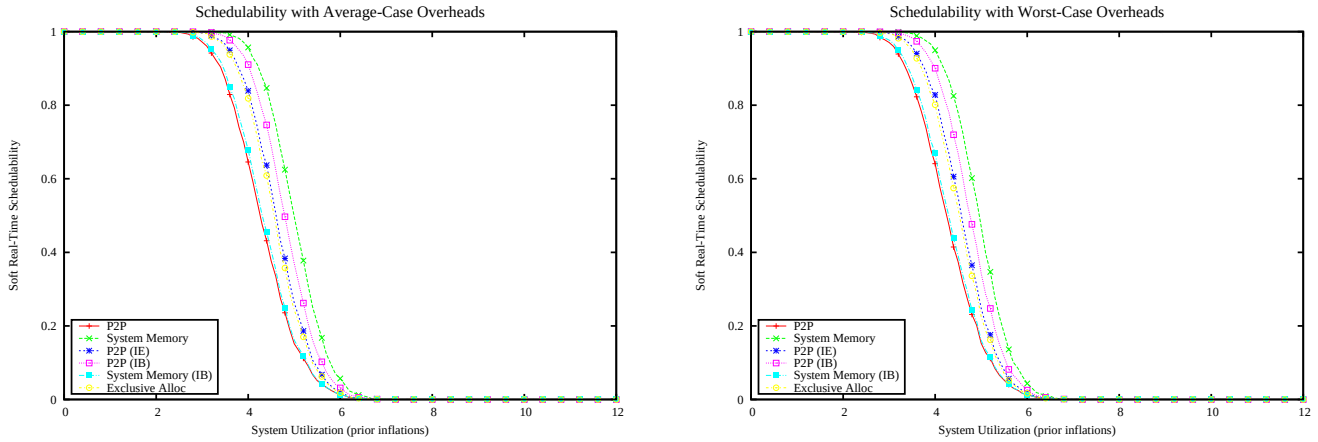

Figure 3033: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

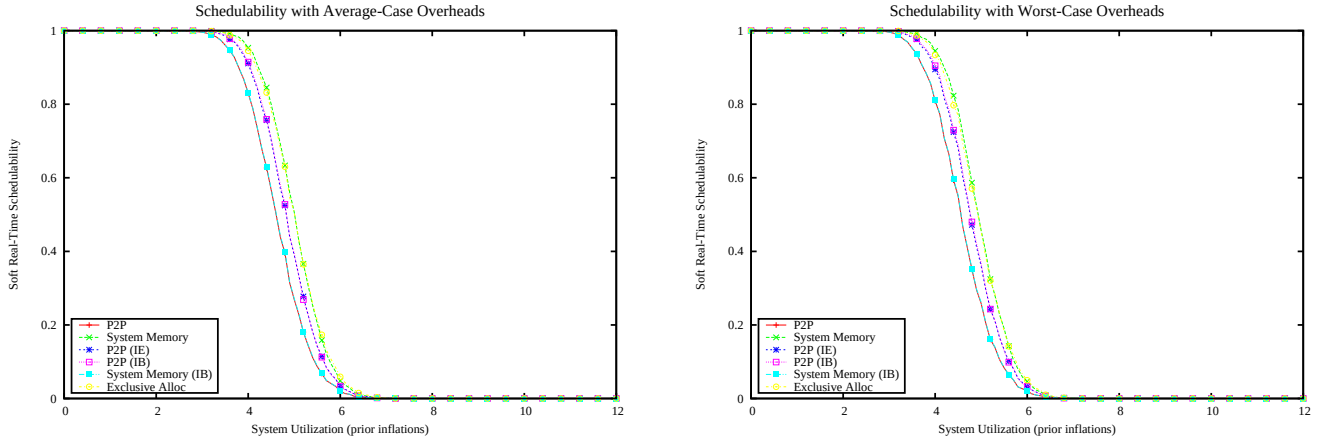

Figure 3034: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

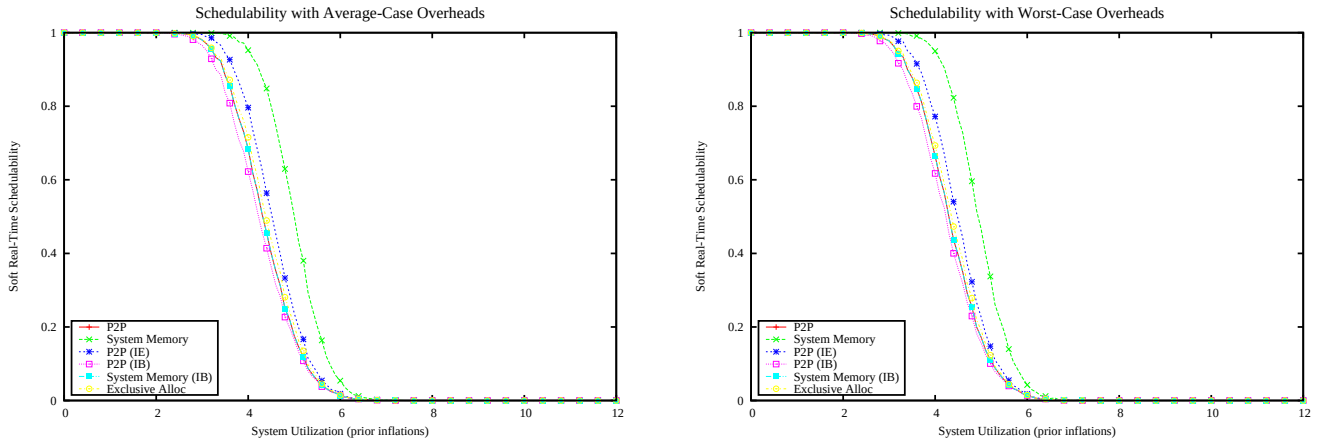

Figure 3035: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

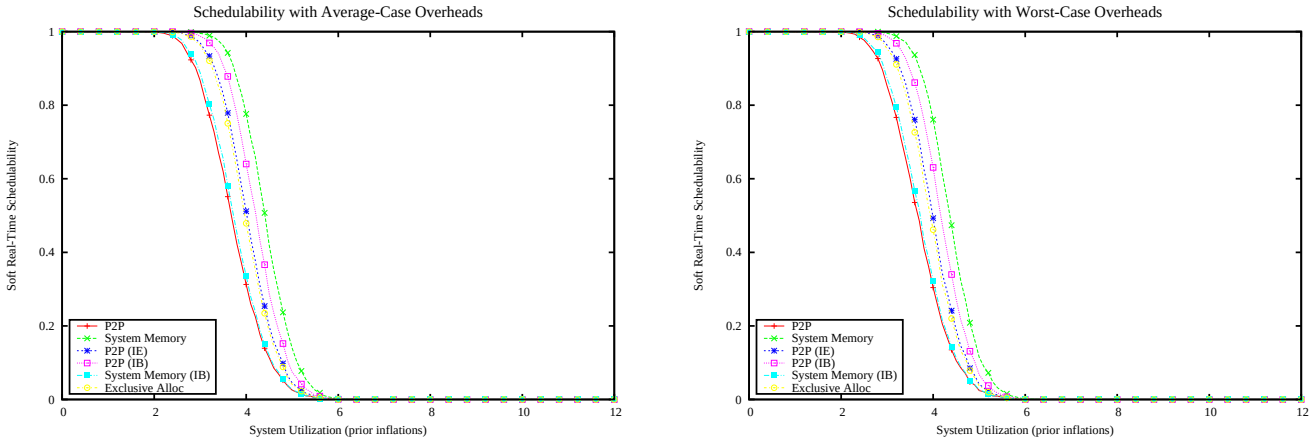

Figure 3036: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

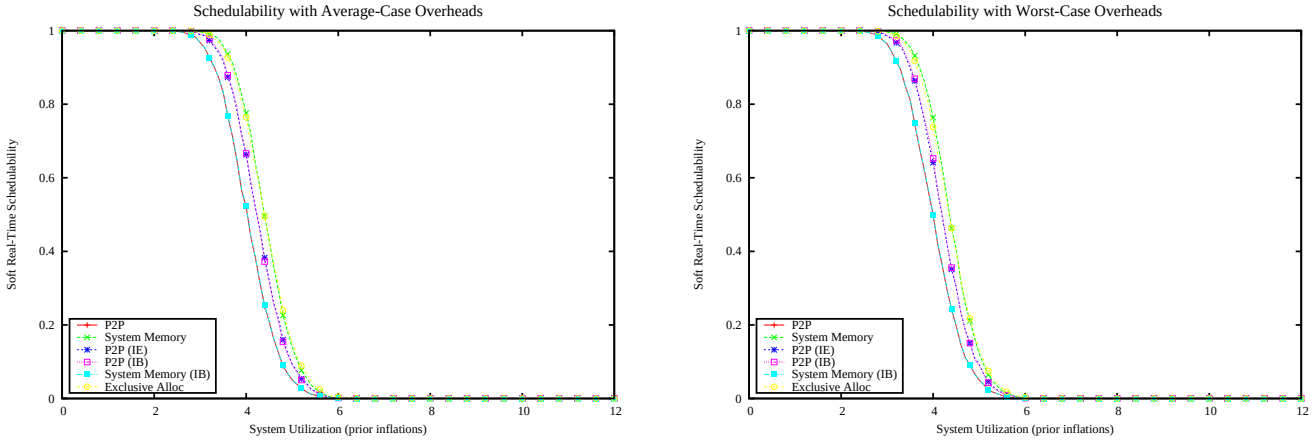

Figure 3037: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

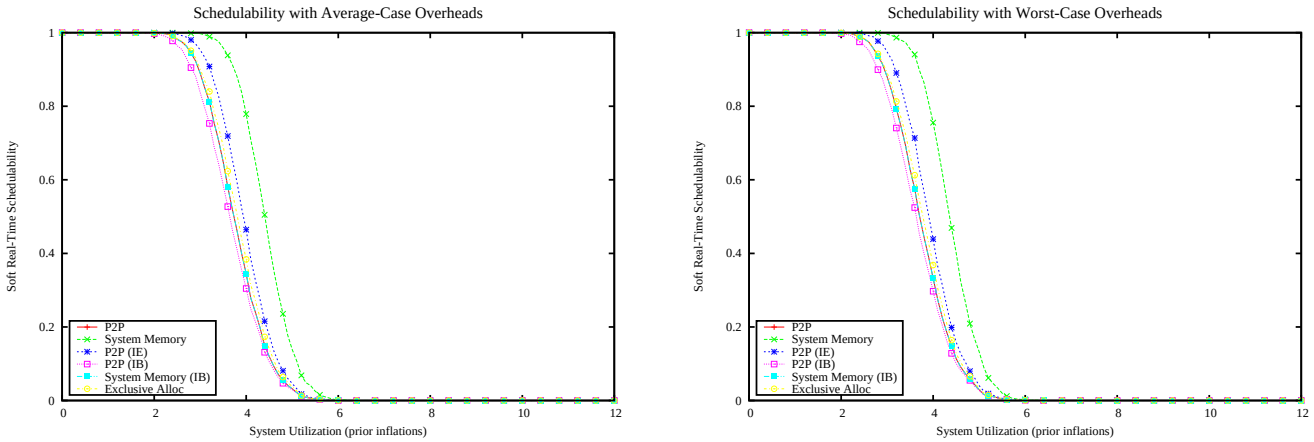

Figure 3038: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

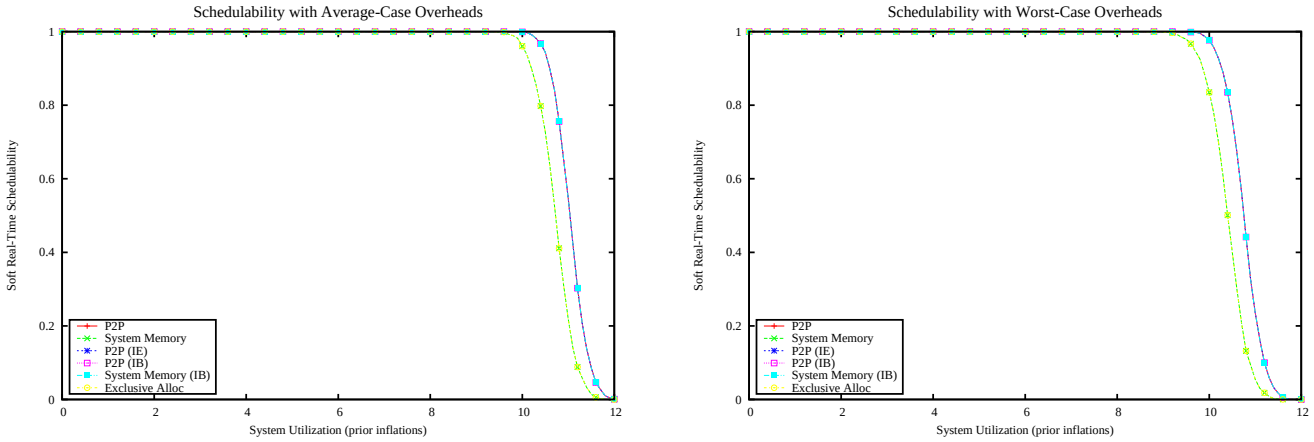

Figure 3039: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

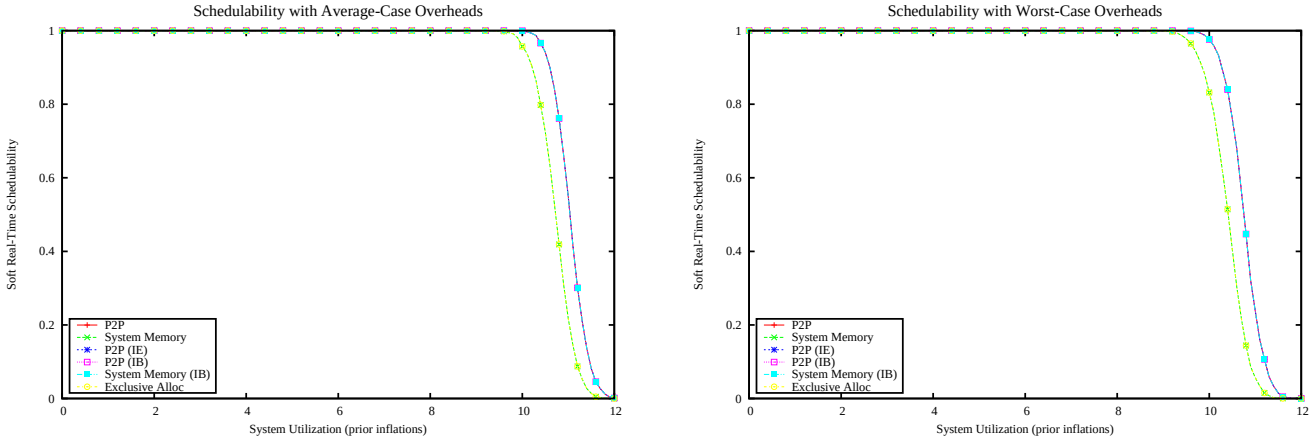

Figure 3040: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

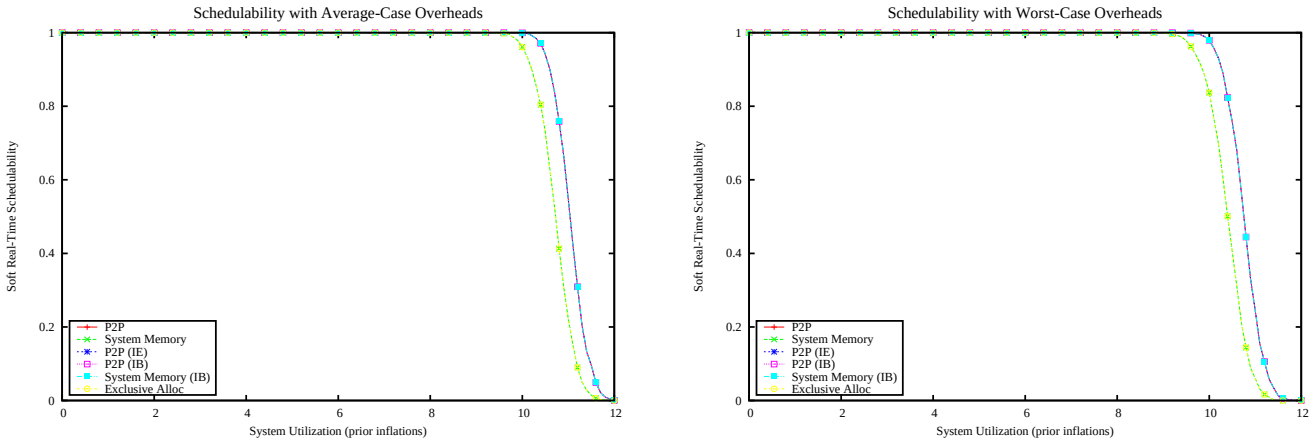

Figure 3041: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

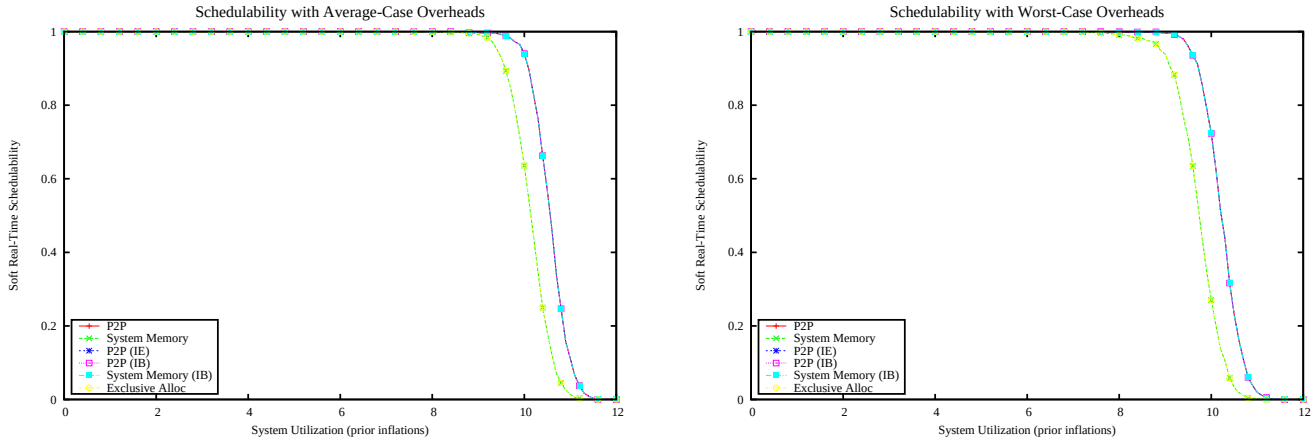

Figure 3042: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

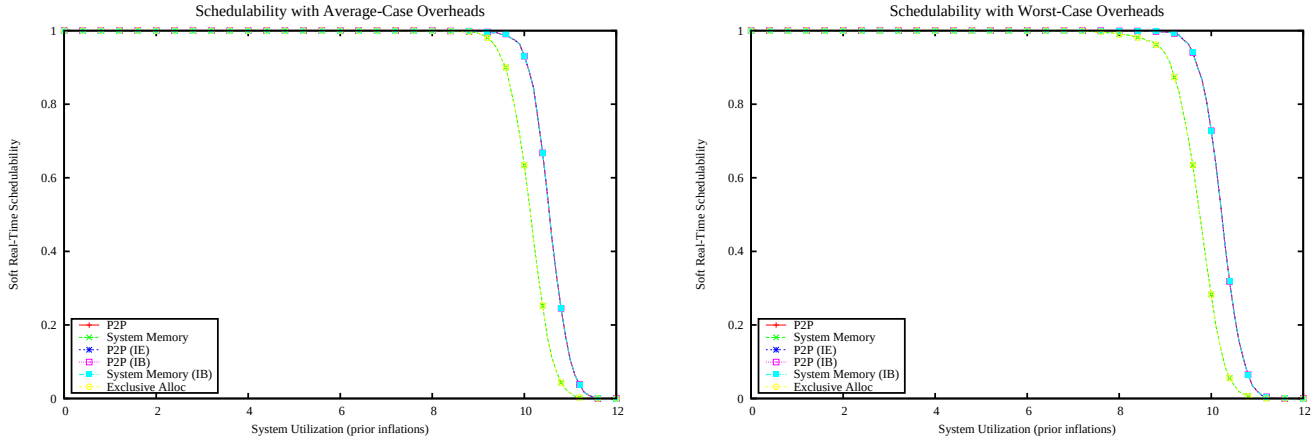

Figure 3043: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

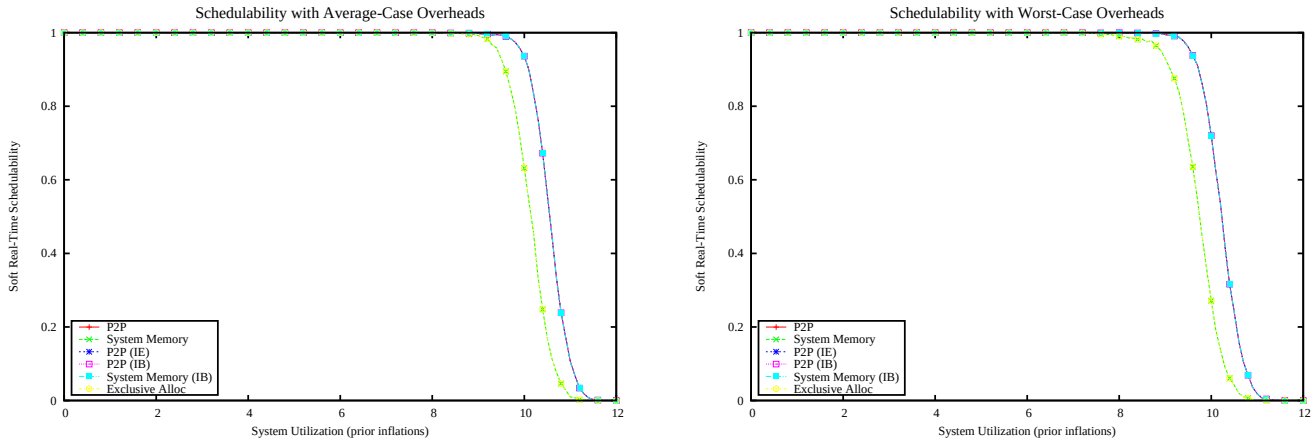

Figure 3044: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

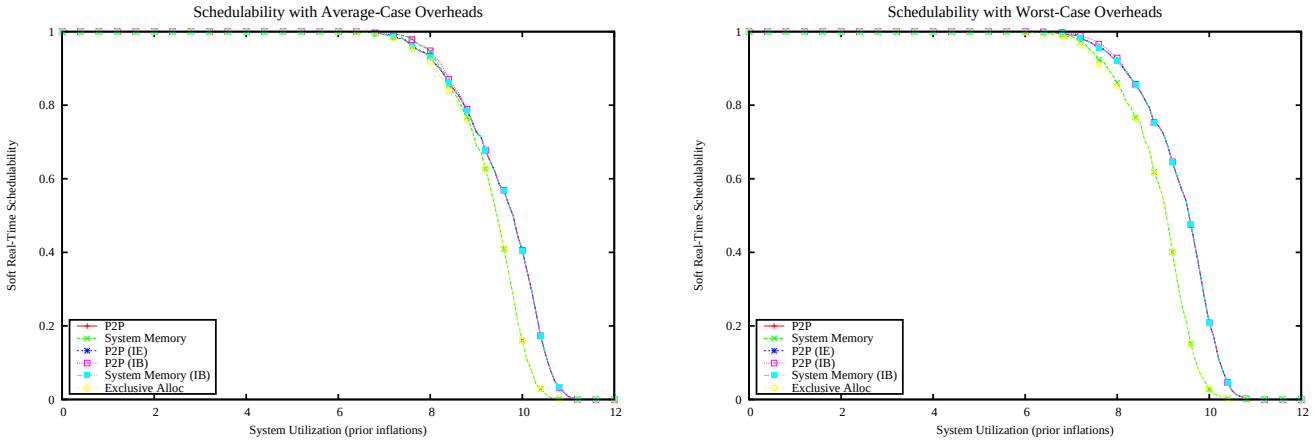

Figure 3045: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

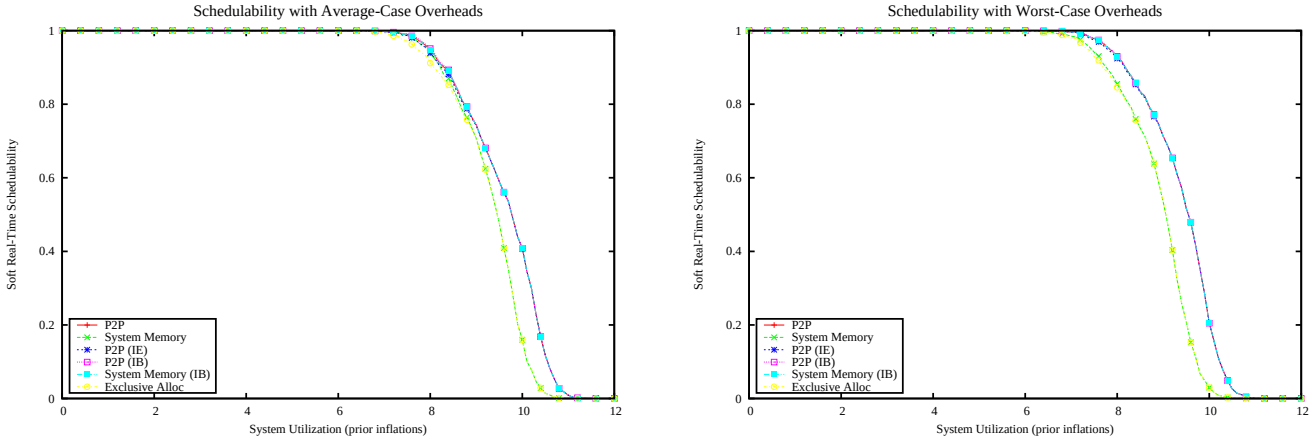

Figure 3046: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

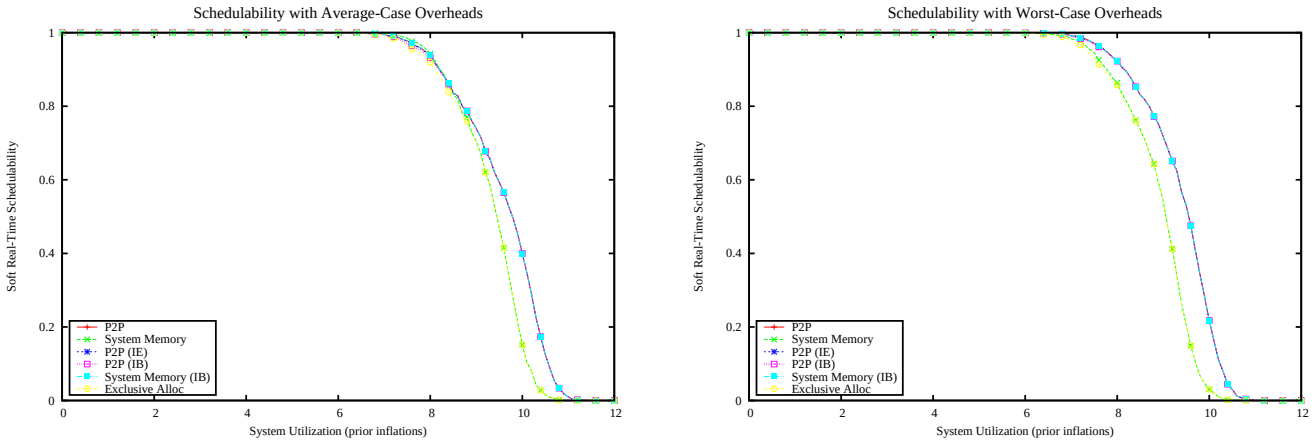

Figure 3047: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

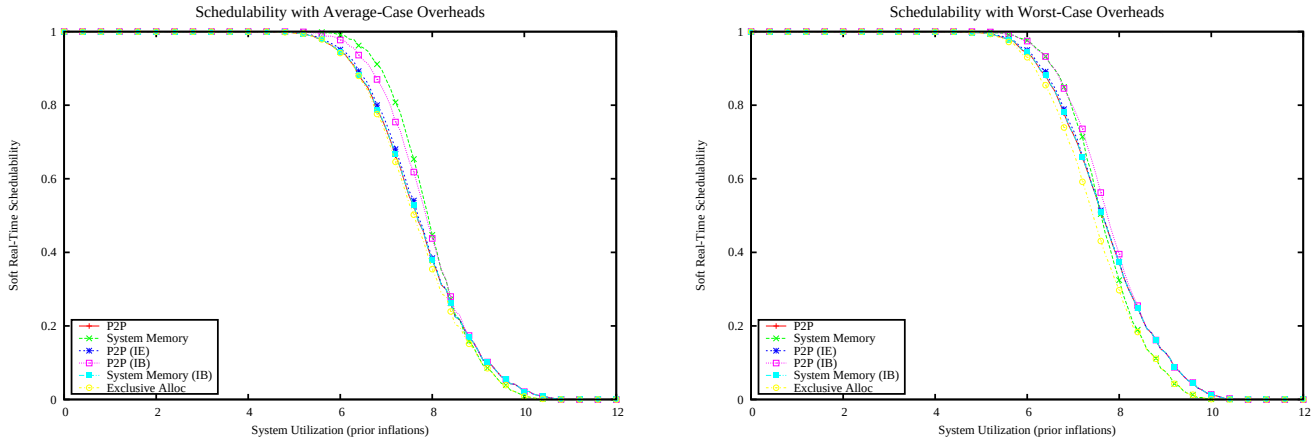

Figure 3048: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

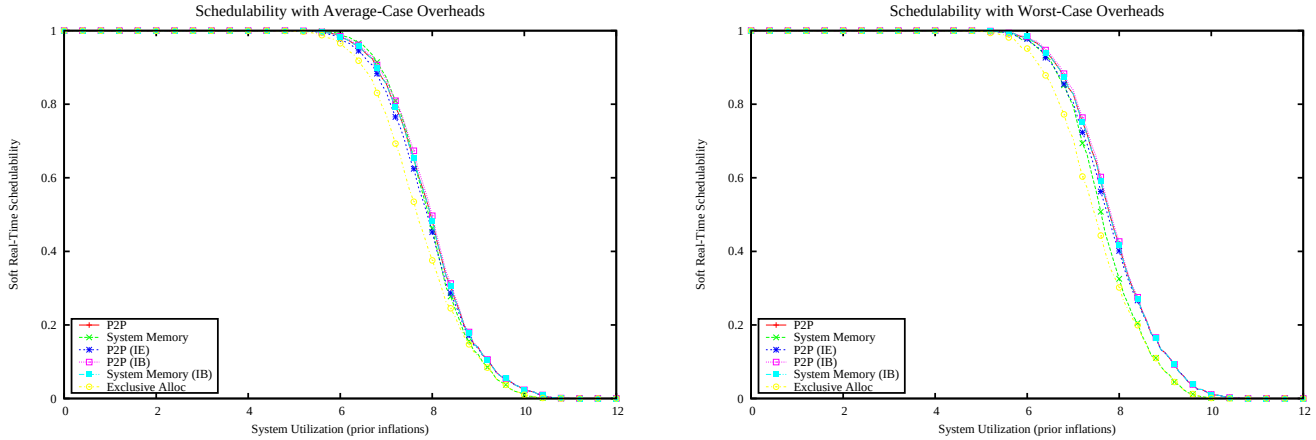

Figure 3049: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

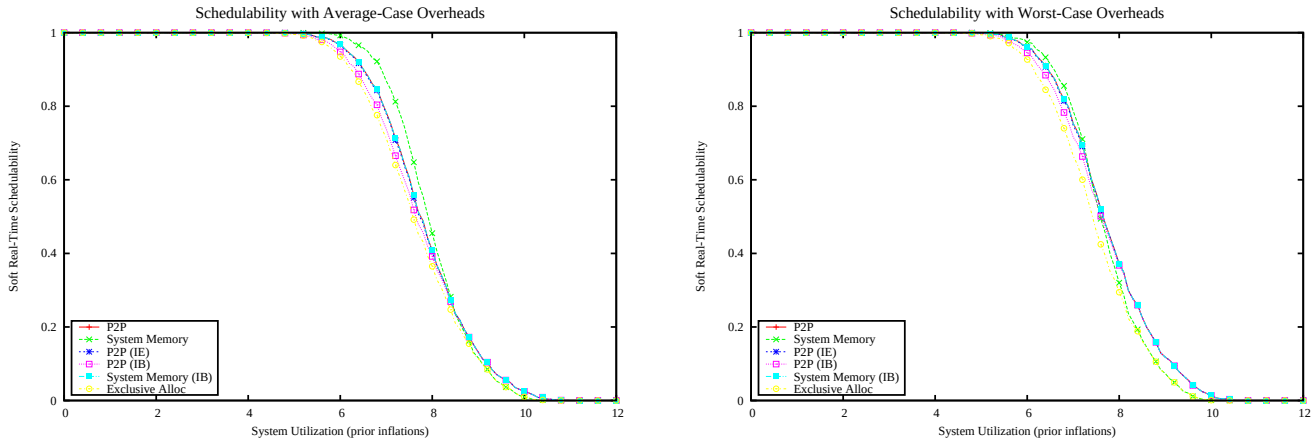

Figure 3050: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

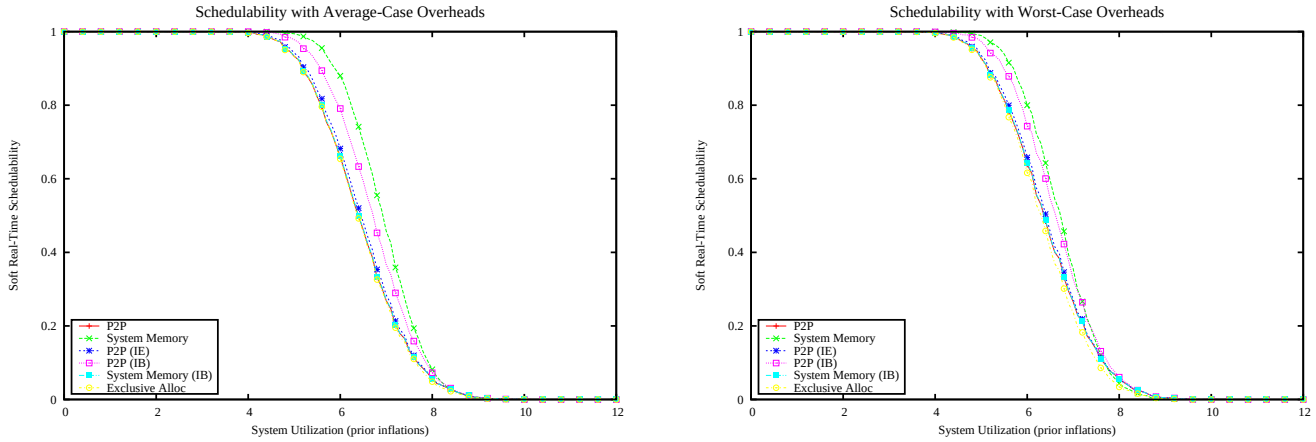

Figure 3051: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

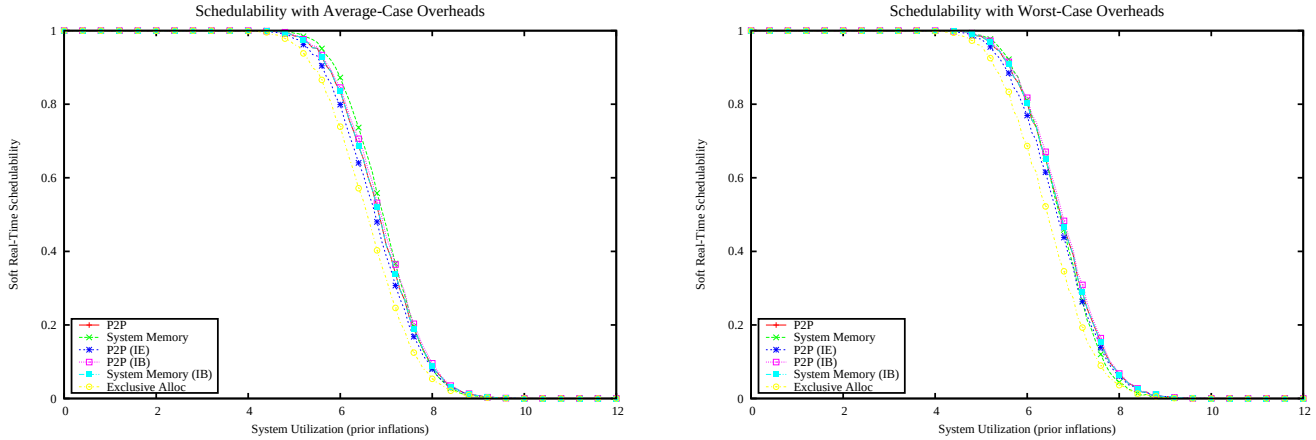

Figure 3052: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

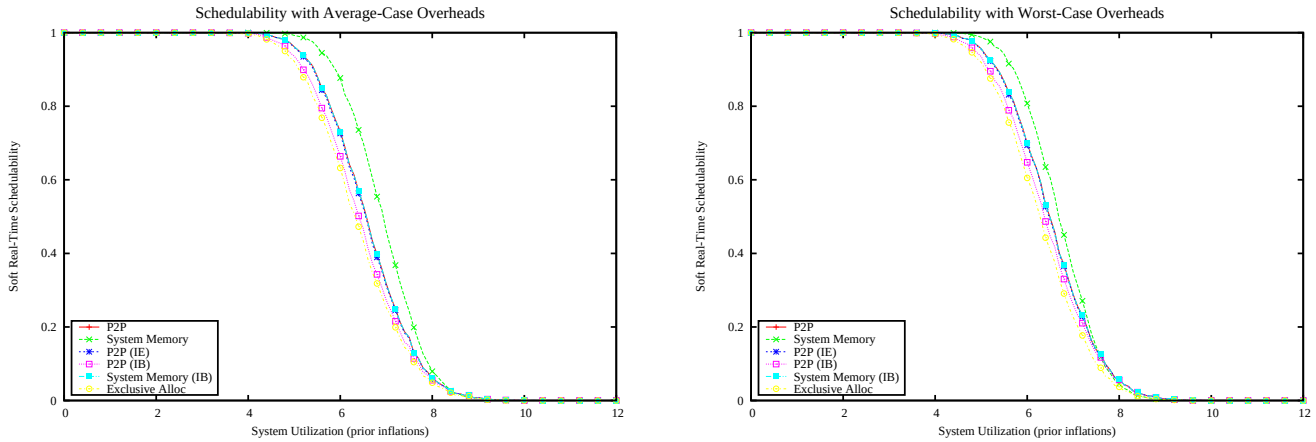

Figure 3053: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

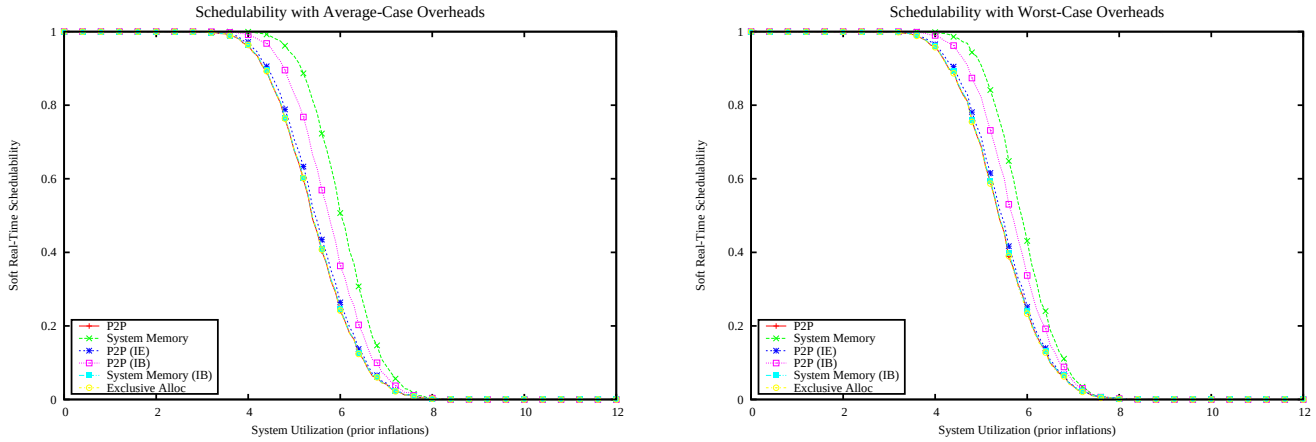

Figure 3054: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

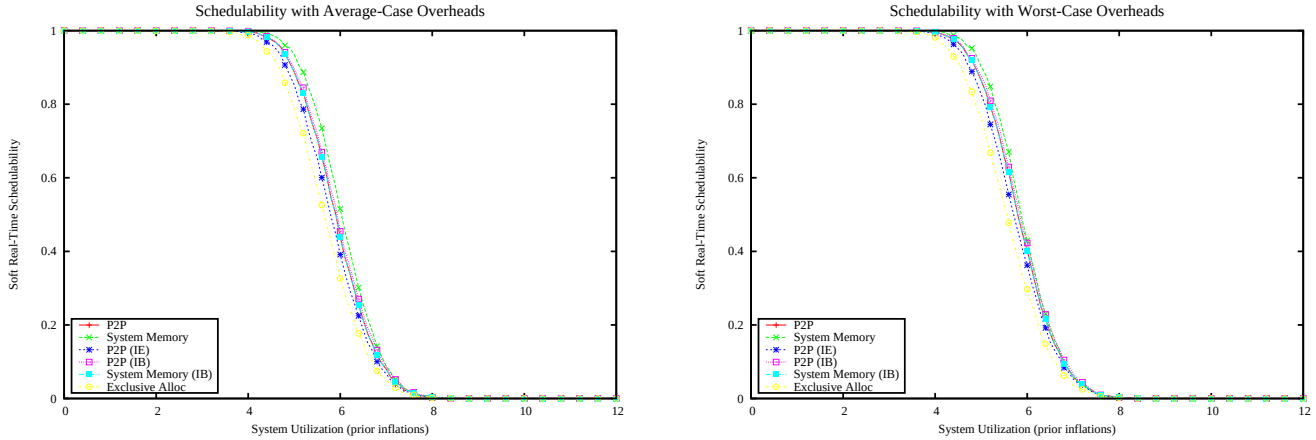

Figure 3055: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

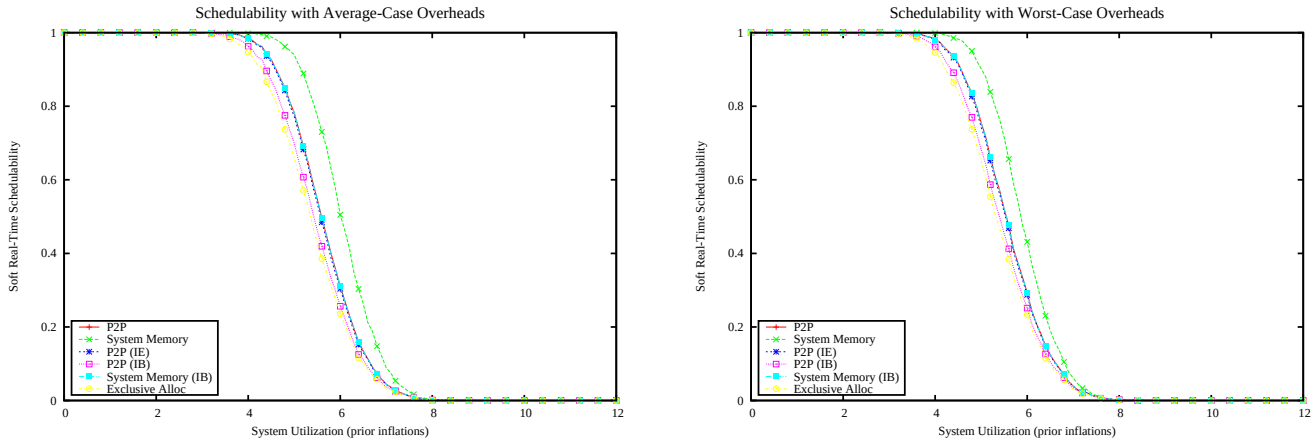

Figure 3056: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

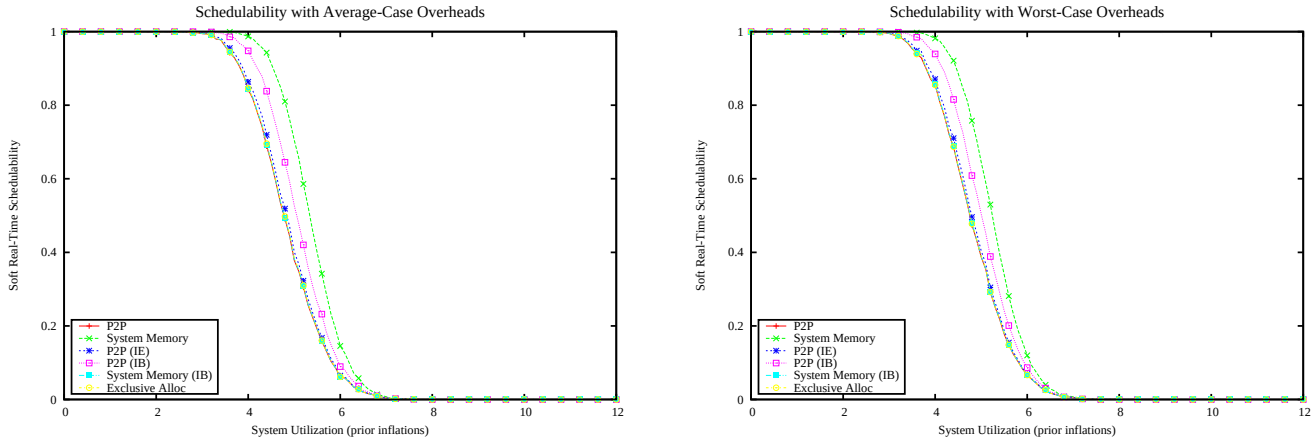

Figure 3057: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

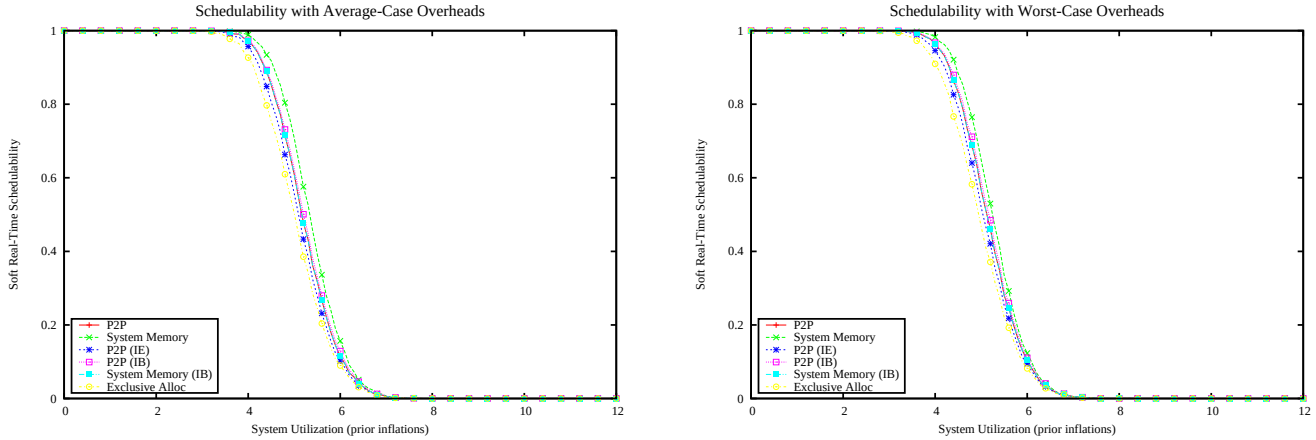

Figure 3058: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

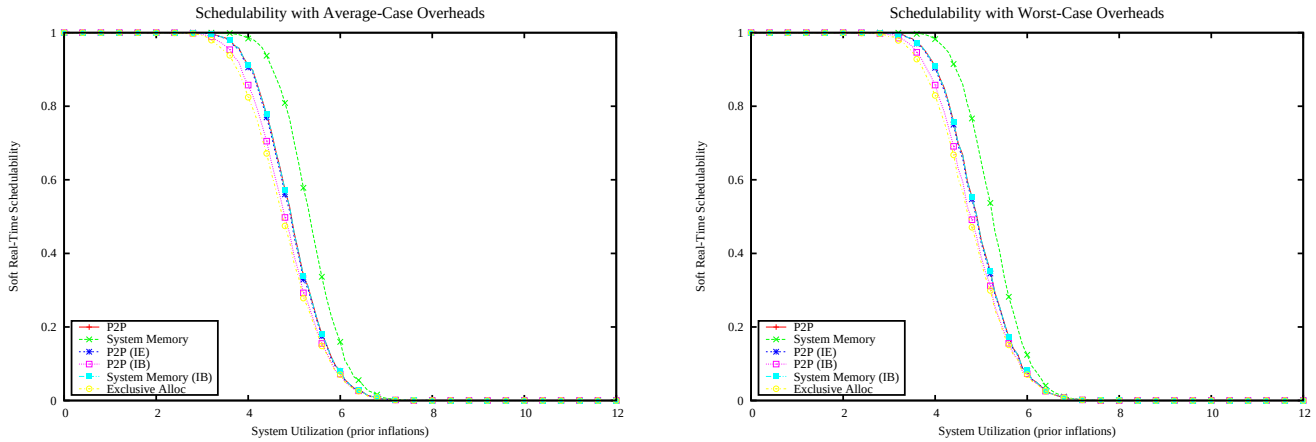

Figure 3059: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

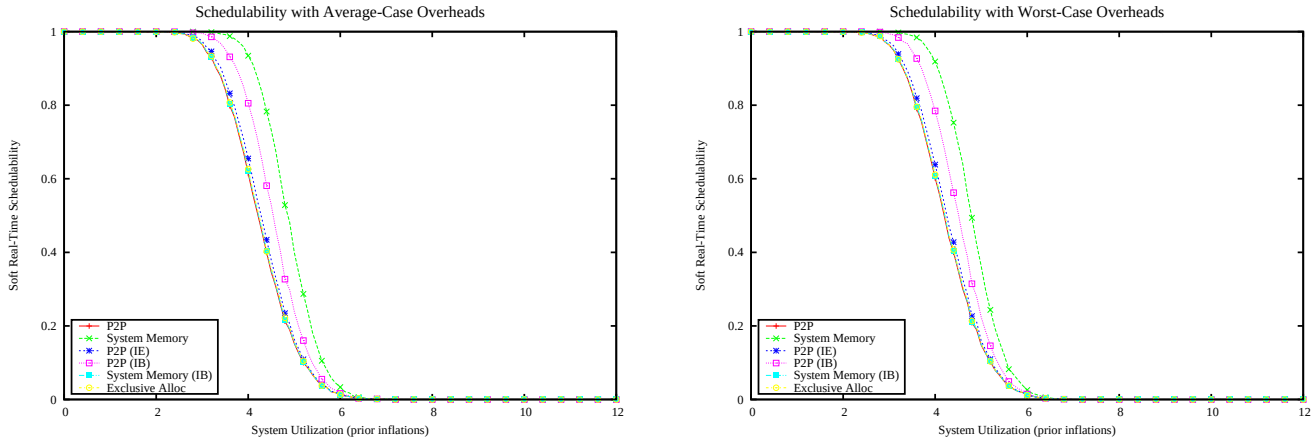

Figure 3060: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

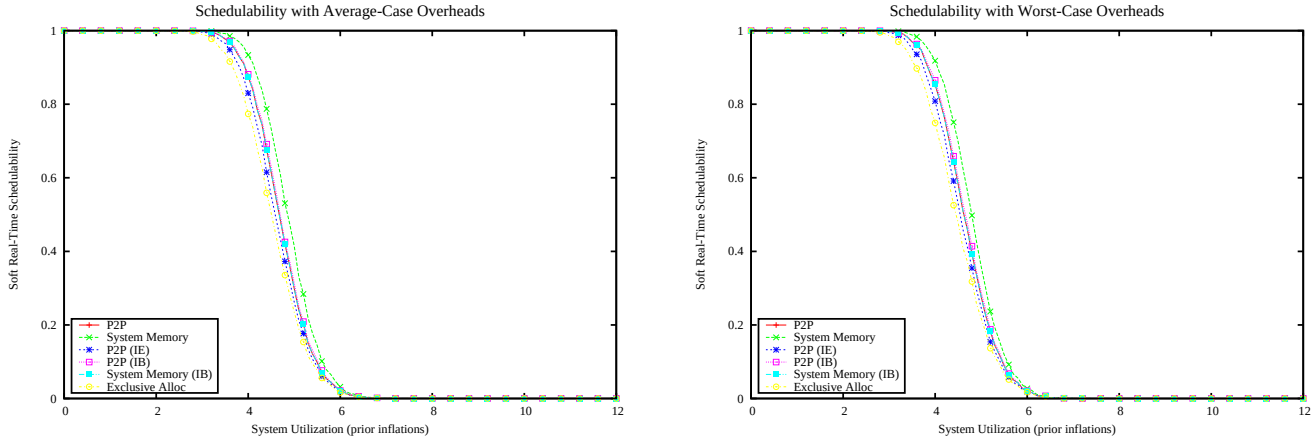

Figure 3061: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

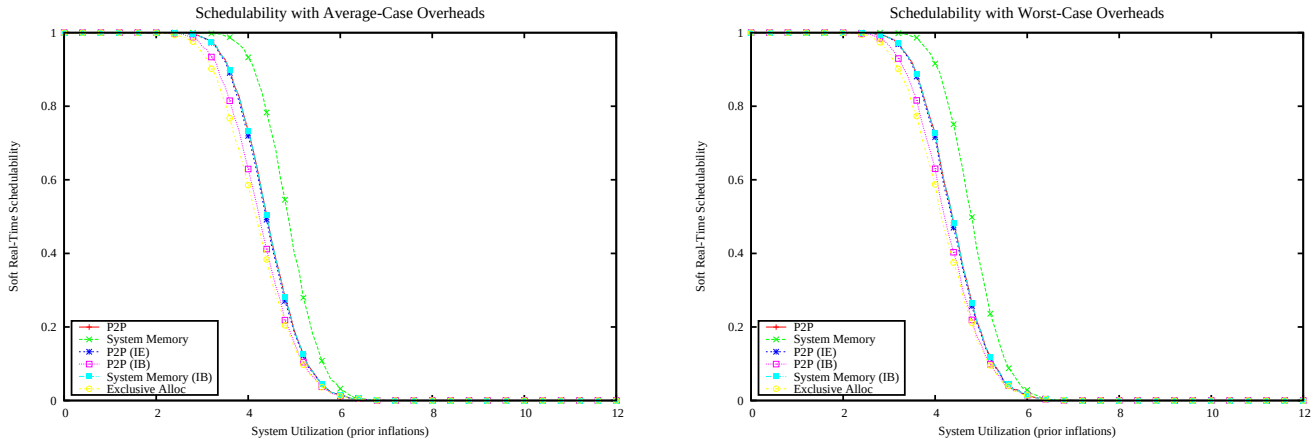

Figure 3062: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

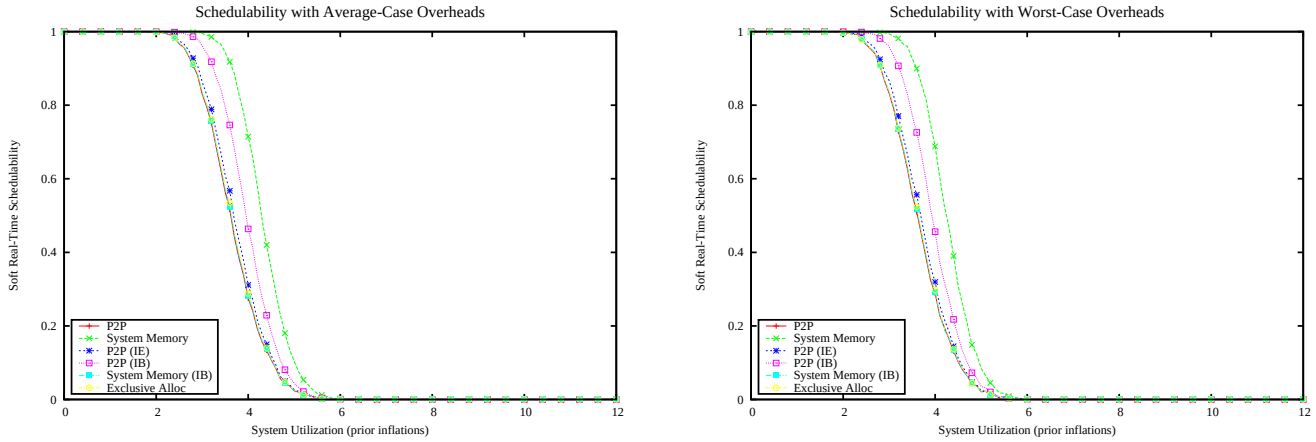

Figure 3063: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

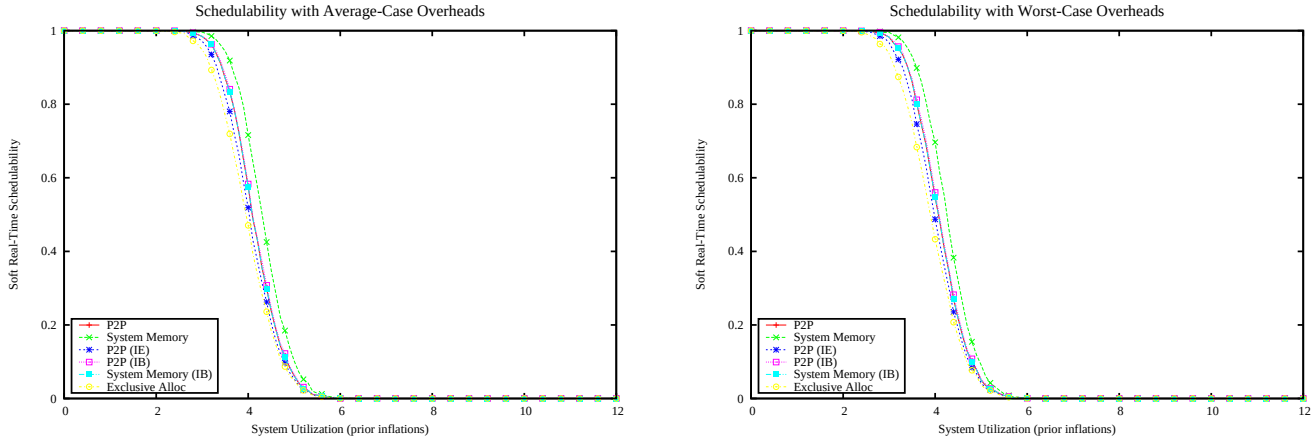

Figure 3064: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

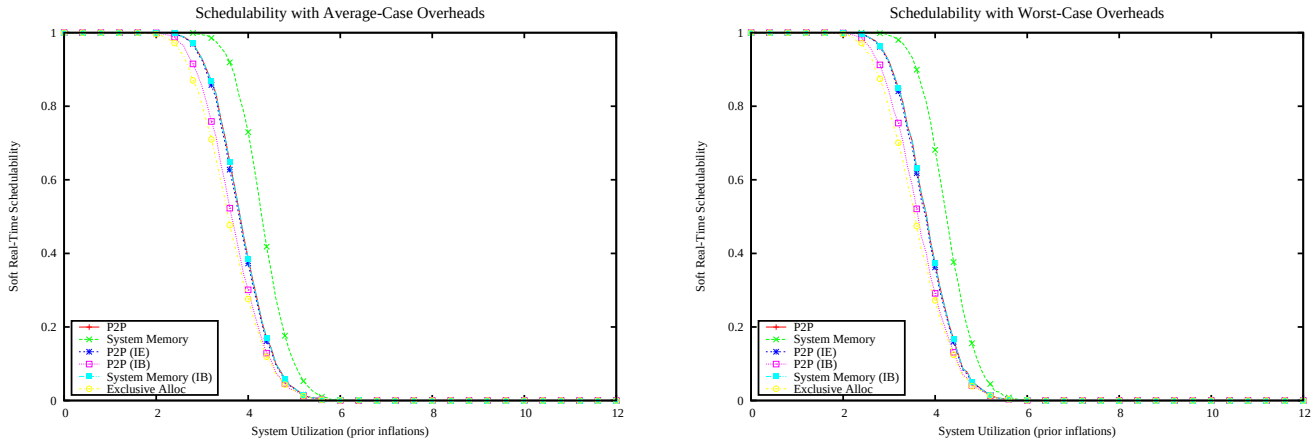

Figure 3065: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

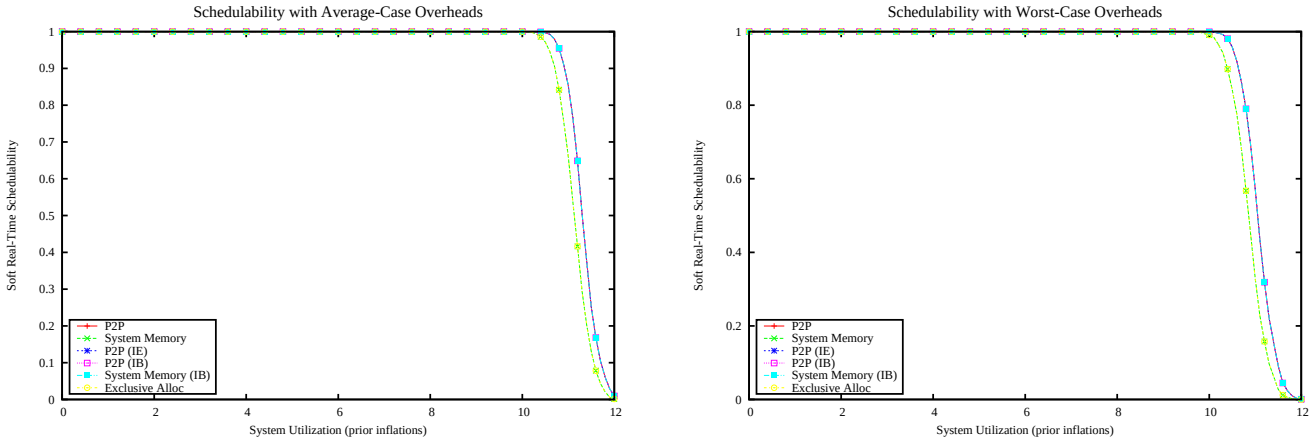

Figure 3066: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

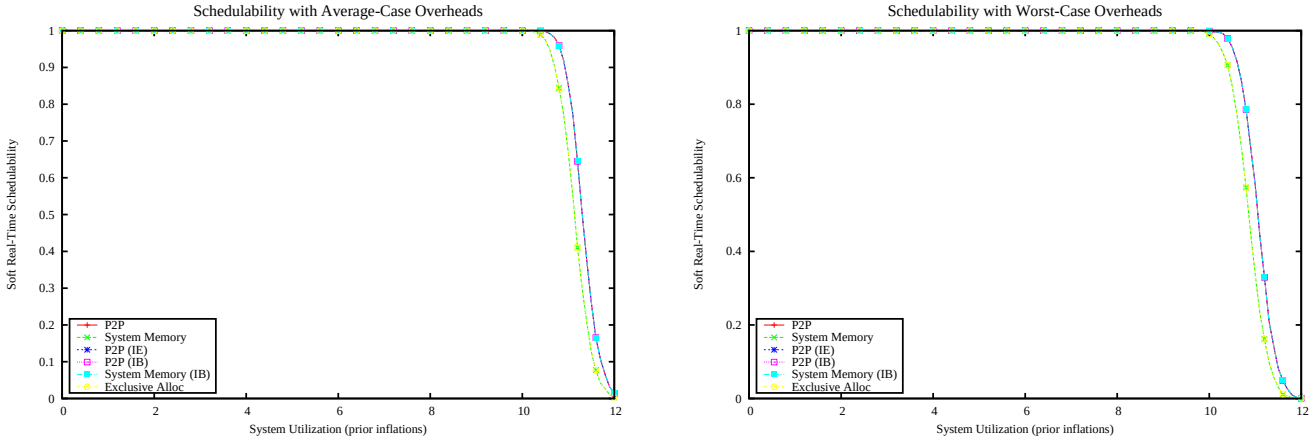

Figure 3067: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

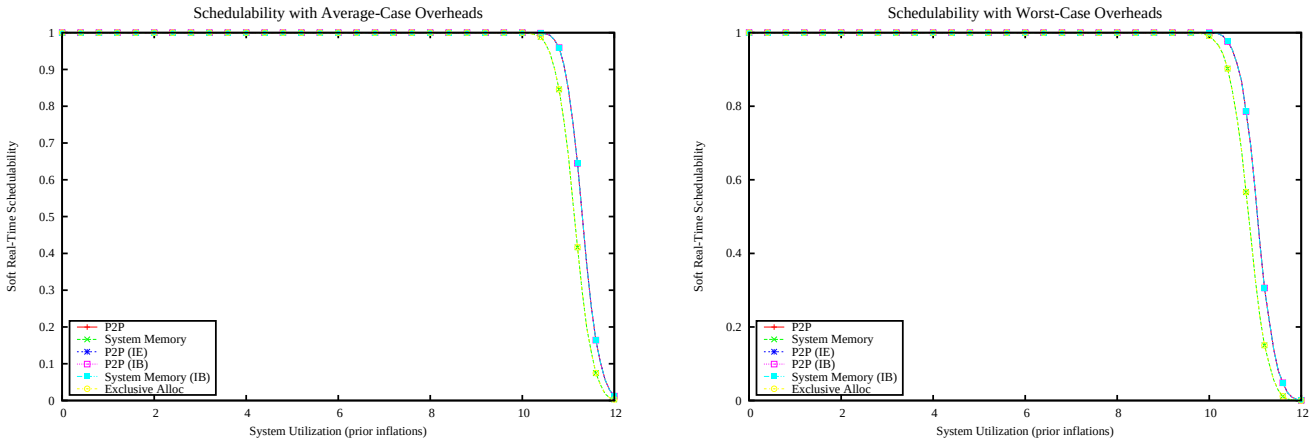

Figure 3068: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

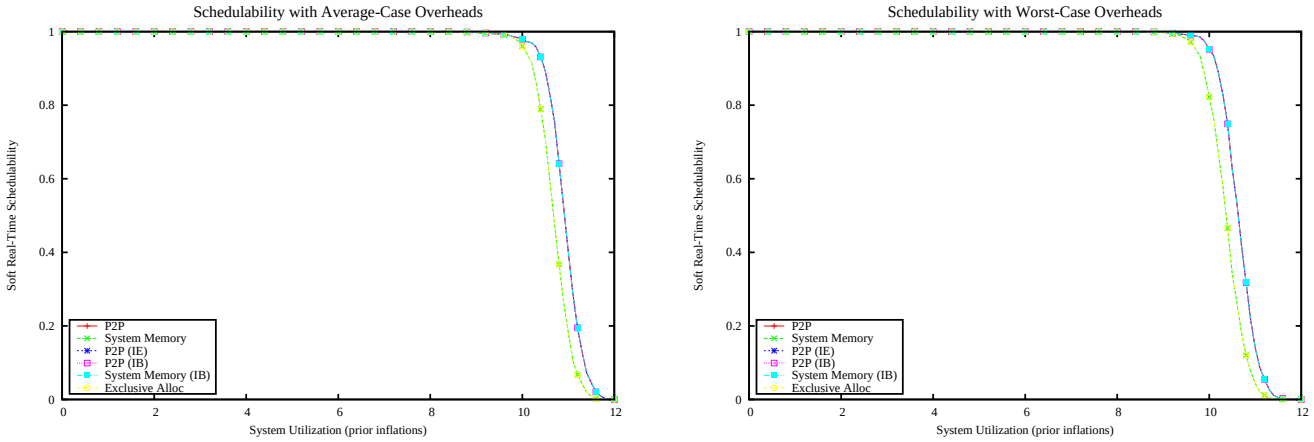

Figure 3069: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

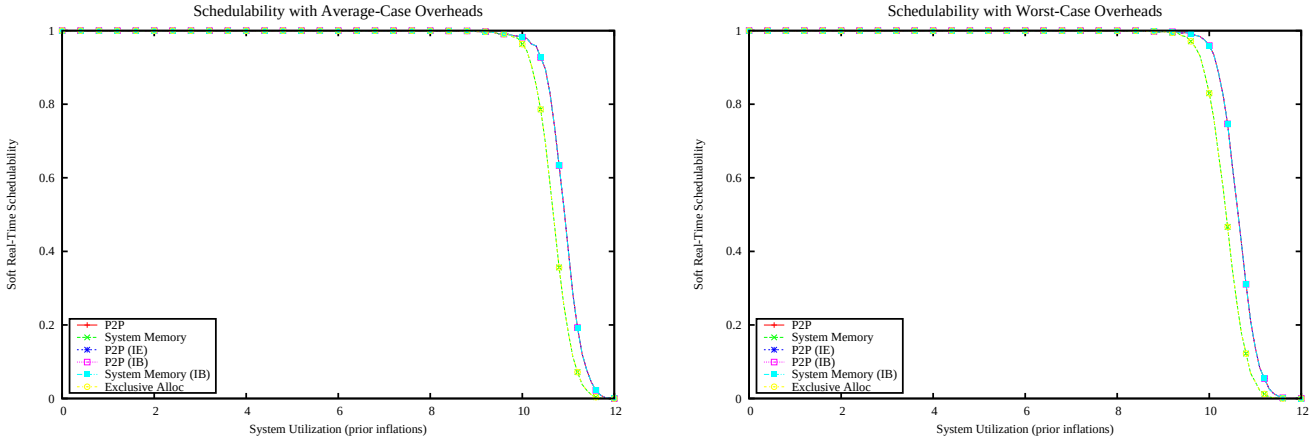

Figure 3070: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

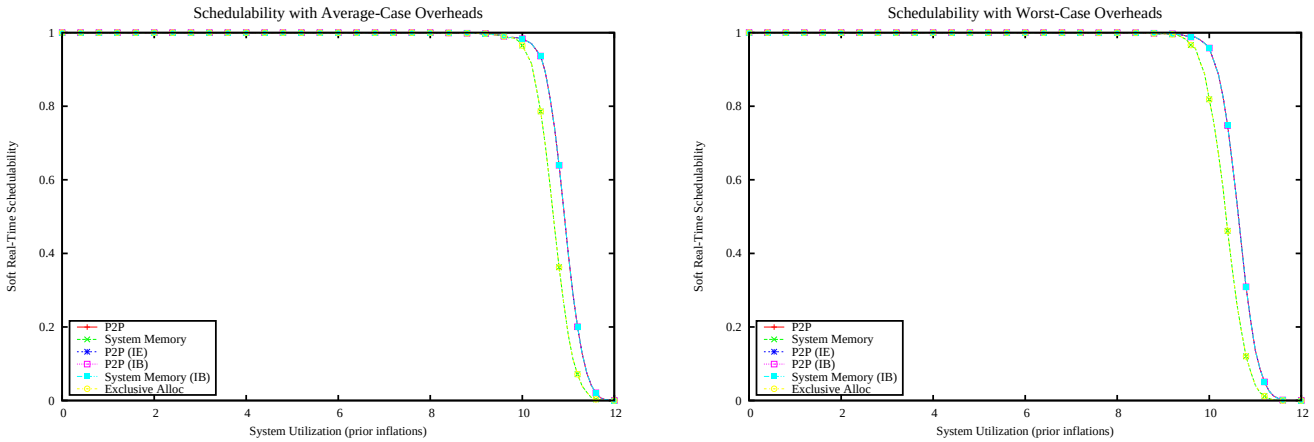

Figure 3071: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

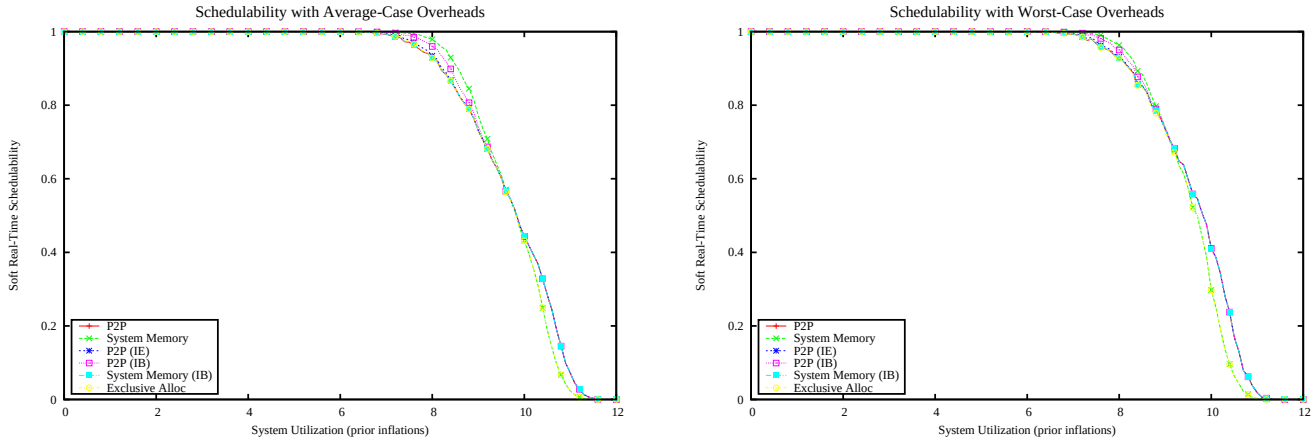

Figure 3072: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

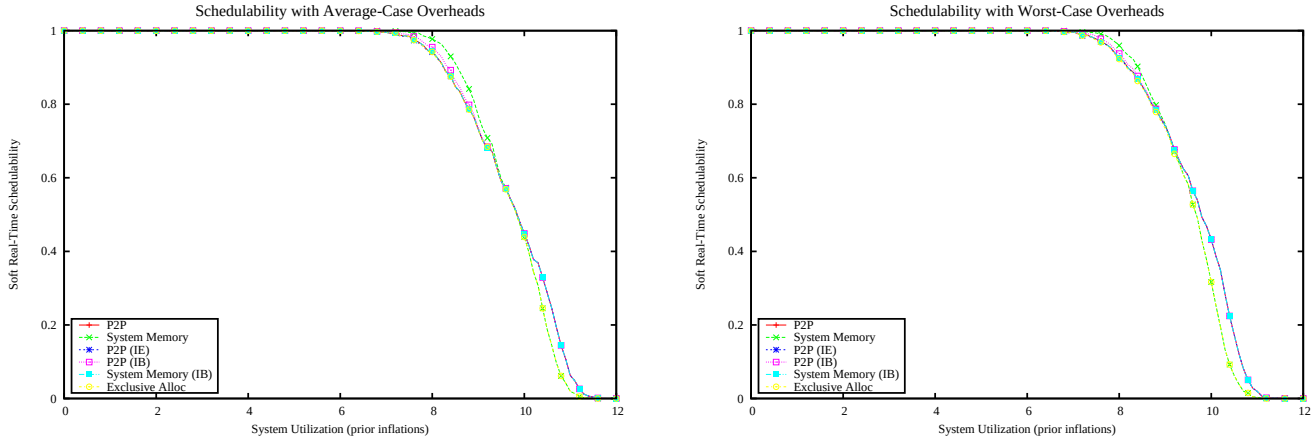

Figure 3073: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

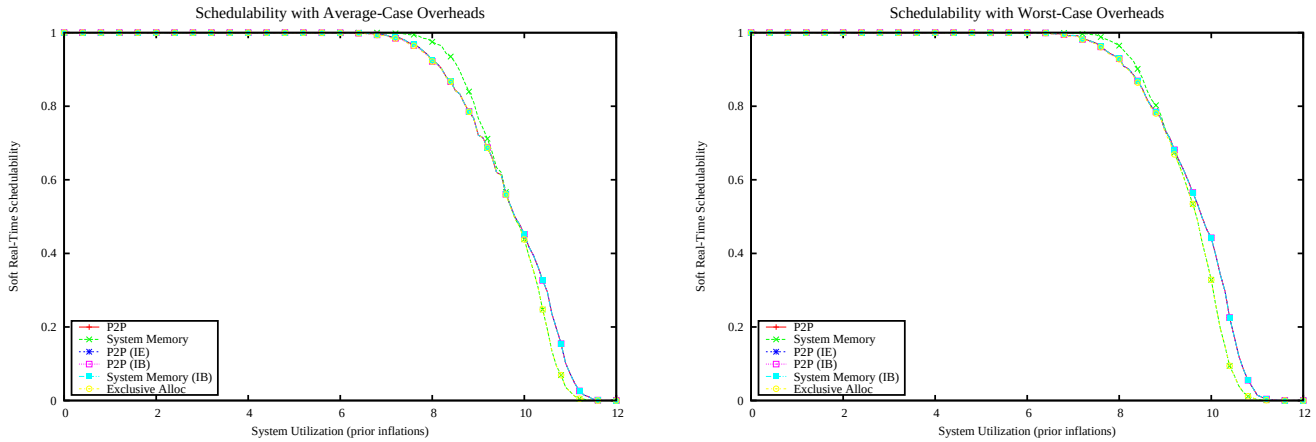

Figure 3074: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

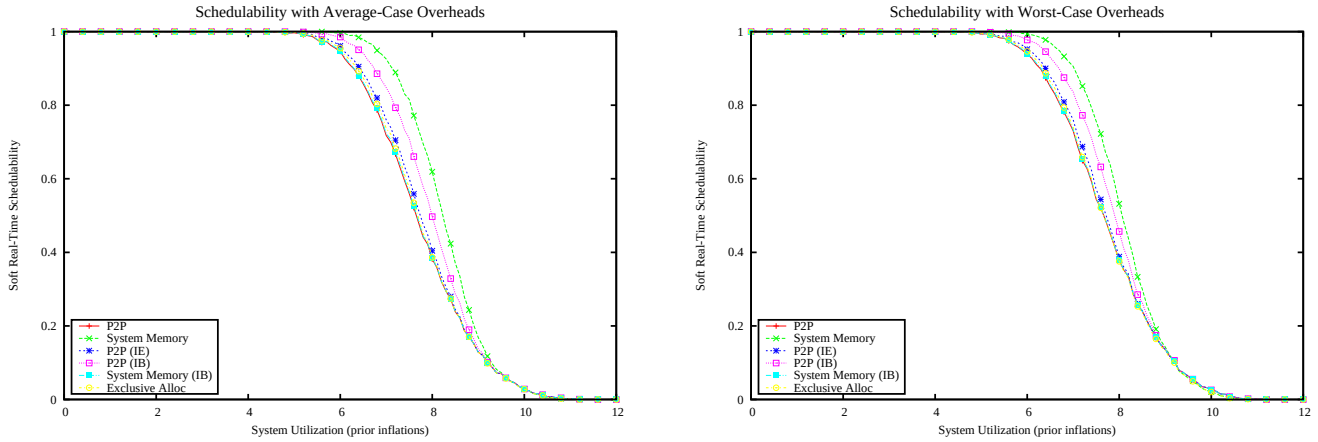

Figure 3075: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

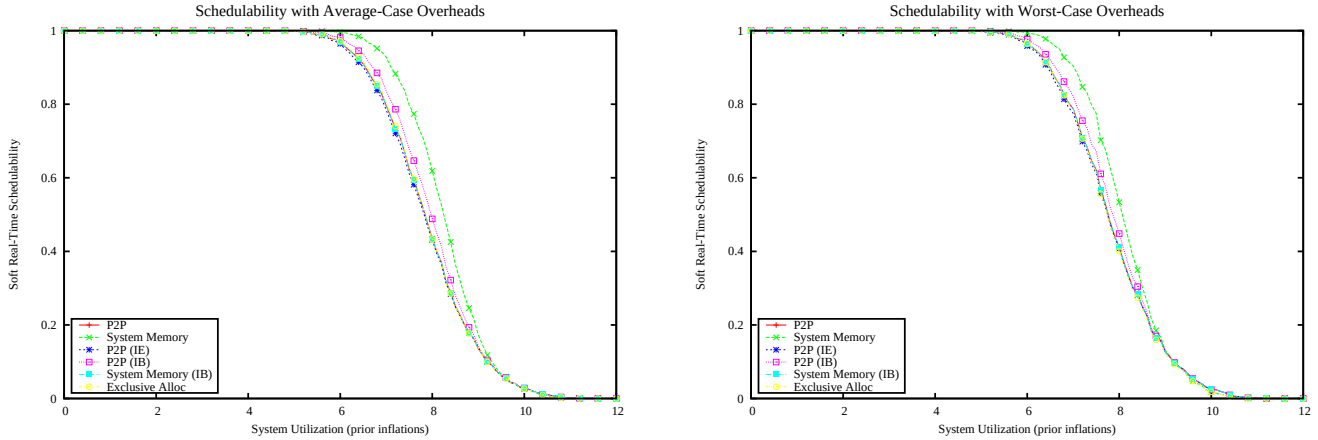

Figure 3076: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

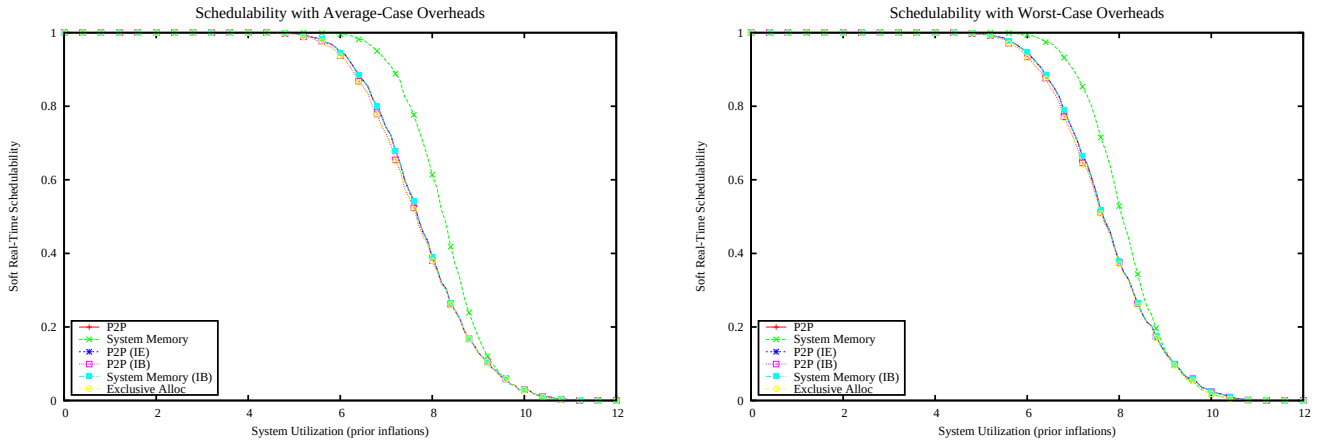

Figure 3077: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

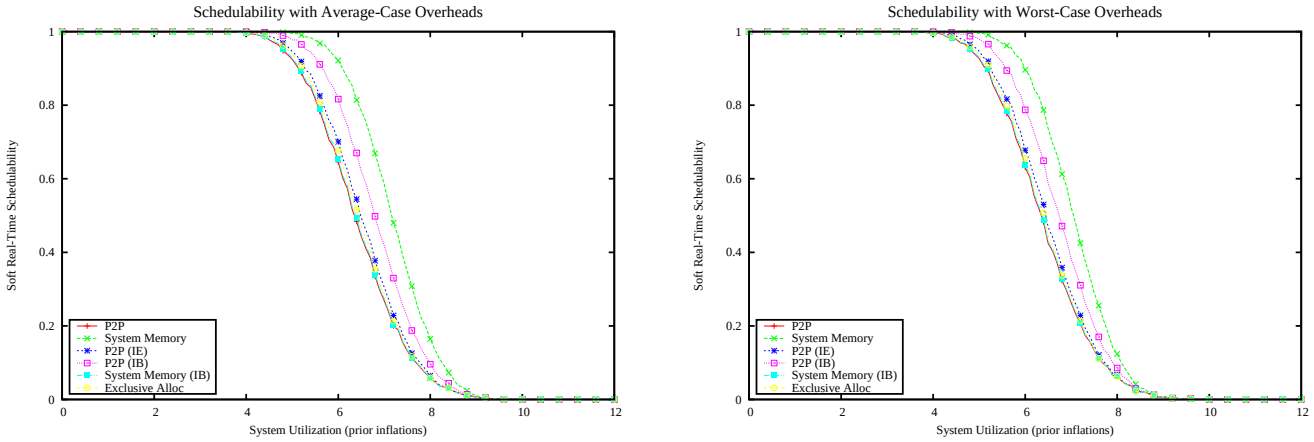

Figure 3078: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

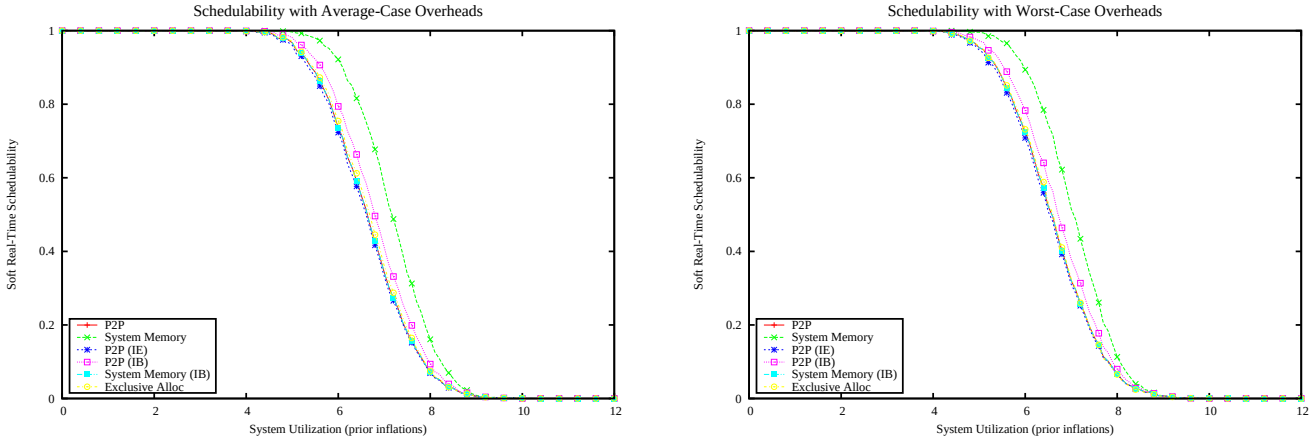

Figure 3079: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

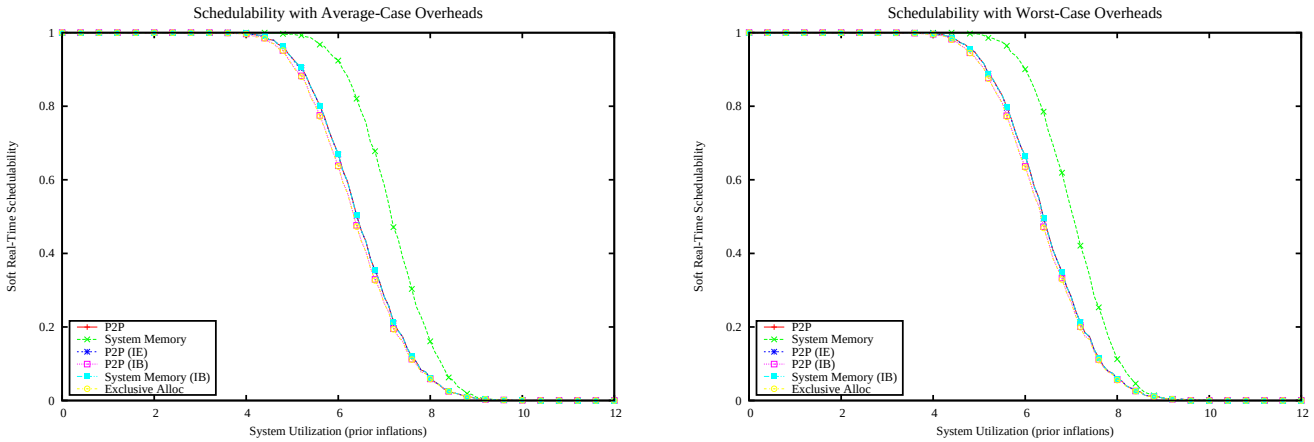

Figure 3080: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

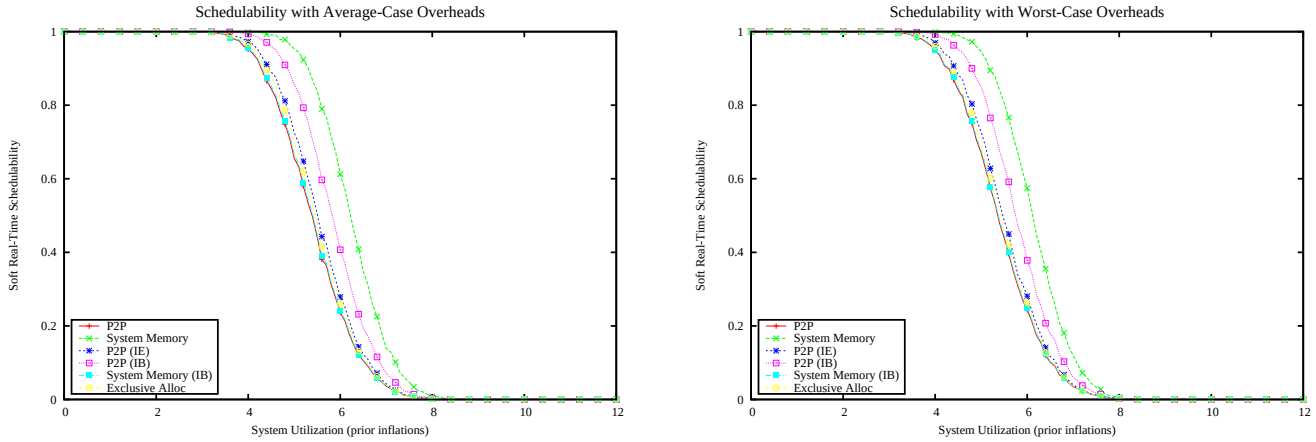

Figure 3081: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

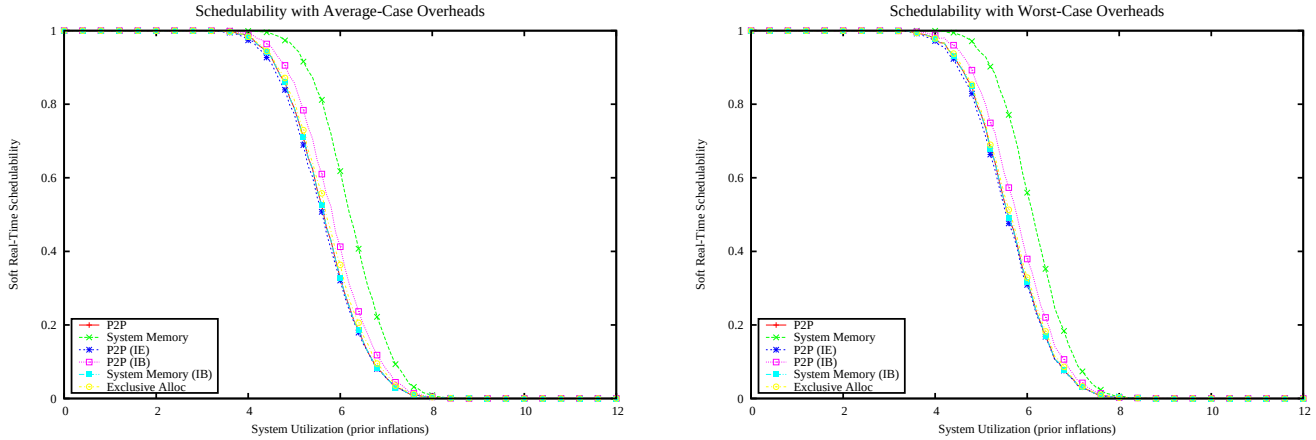

Figure 3082: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

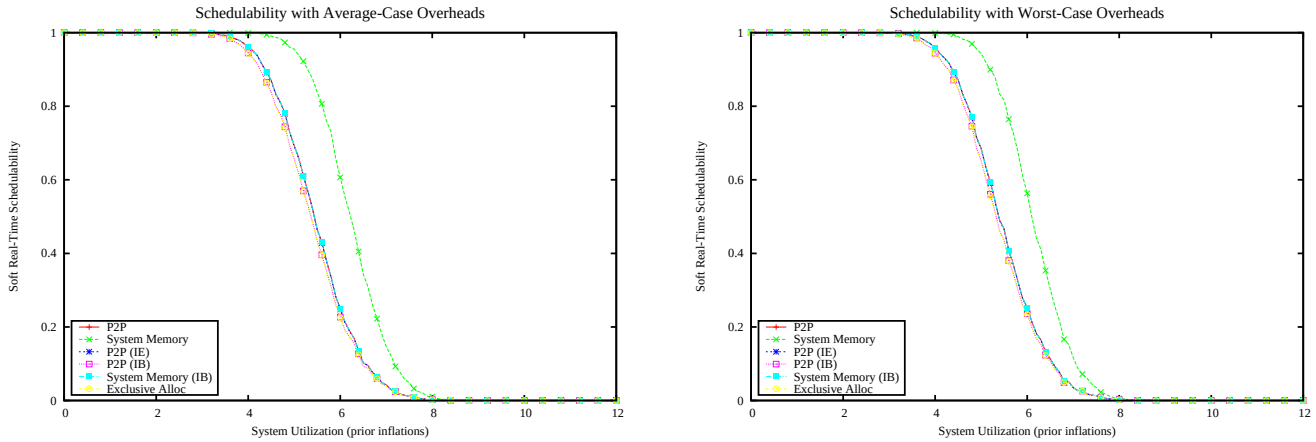

Figure 3083: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

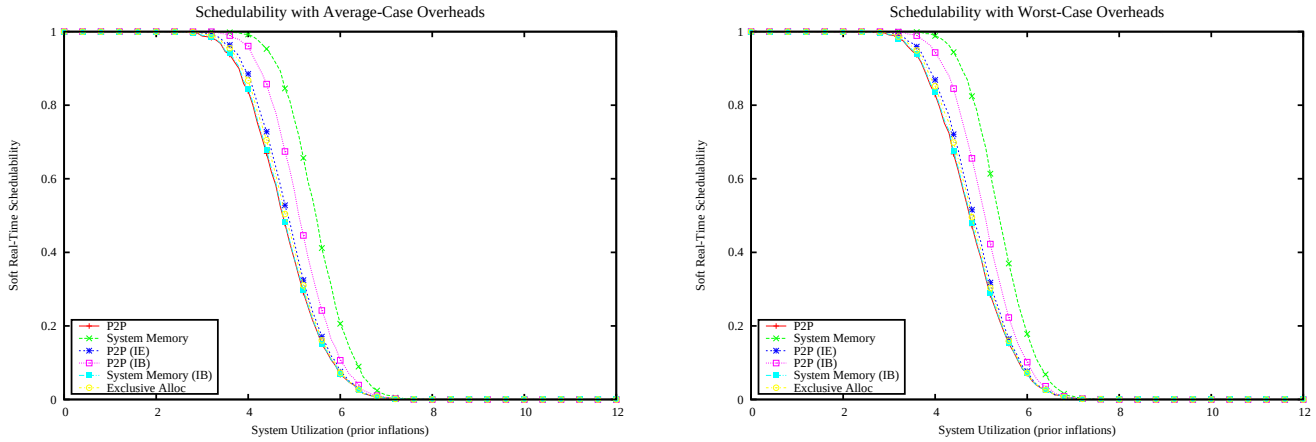

Figure 3084: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

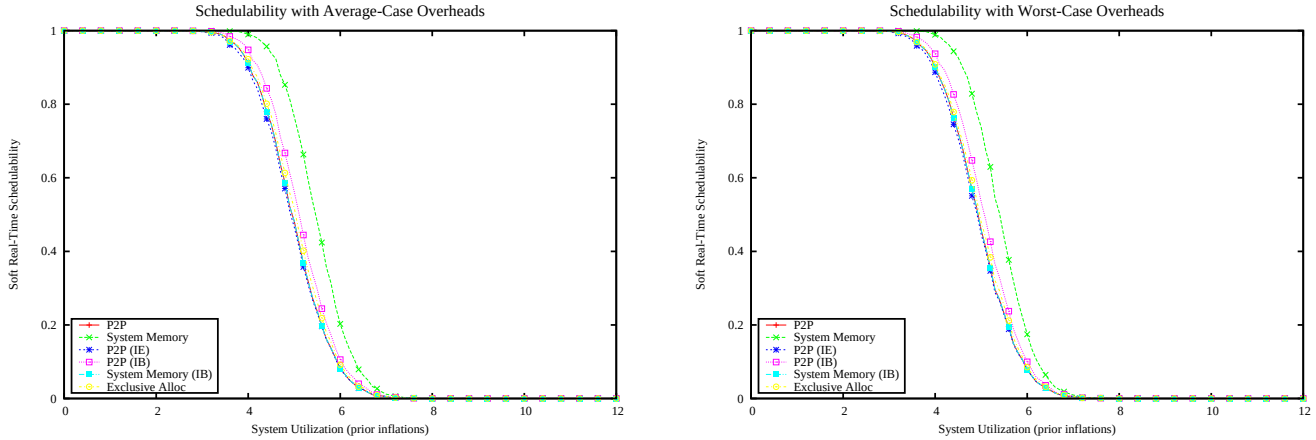

Figure 3085: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

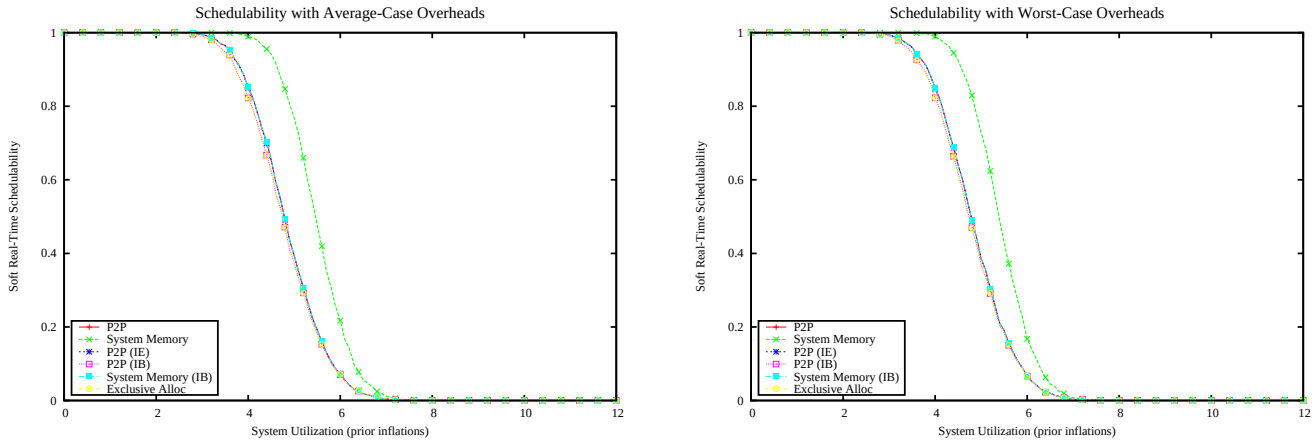

Figure 3086: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

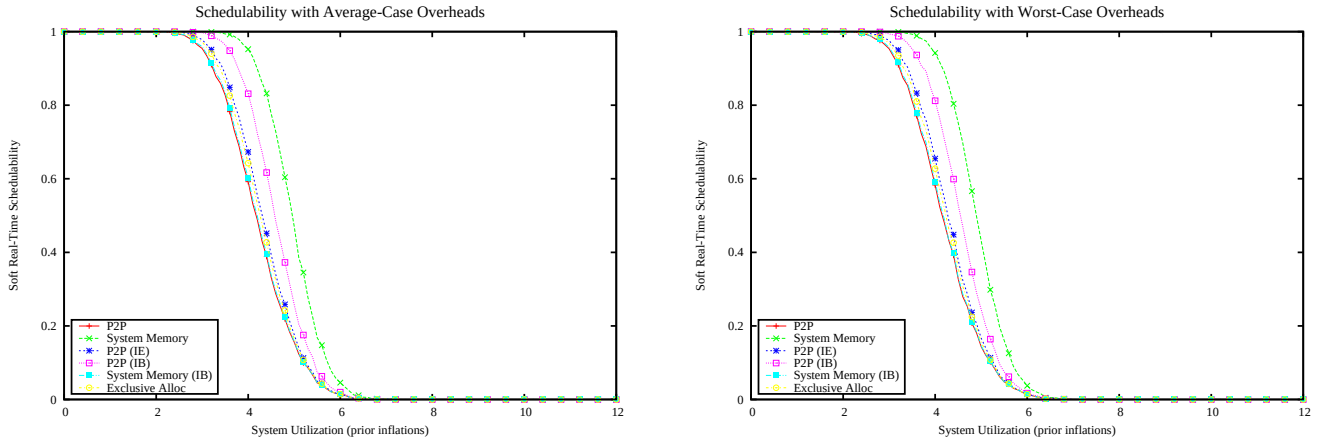

Figure 3087: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

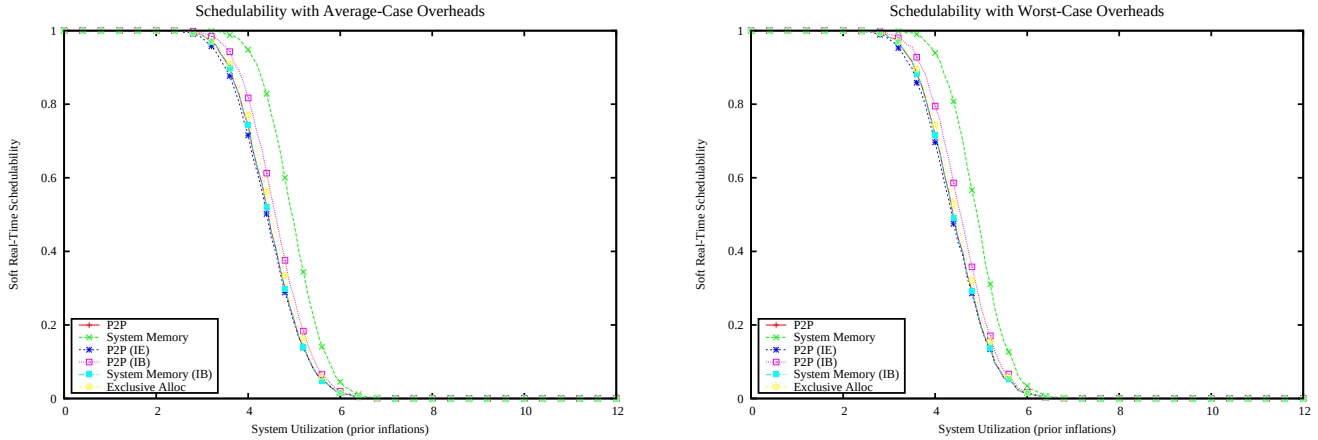

Figure 3088: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

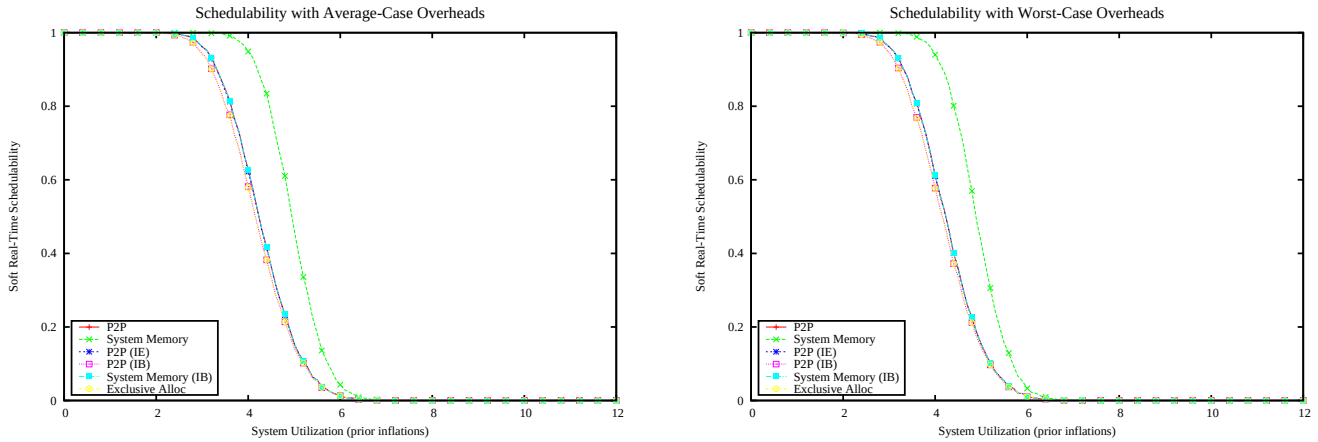

Figure 3089: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

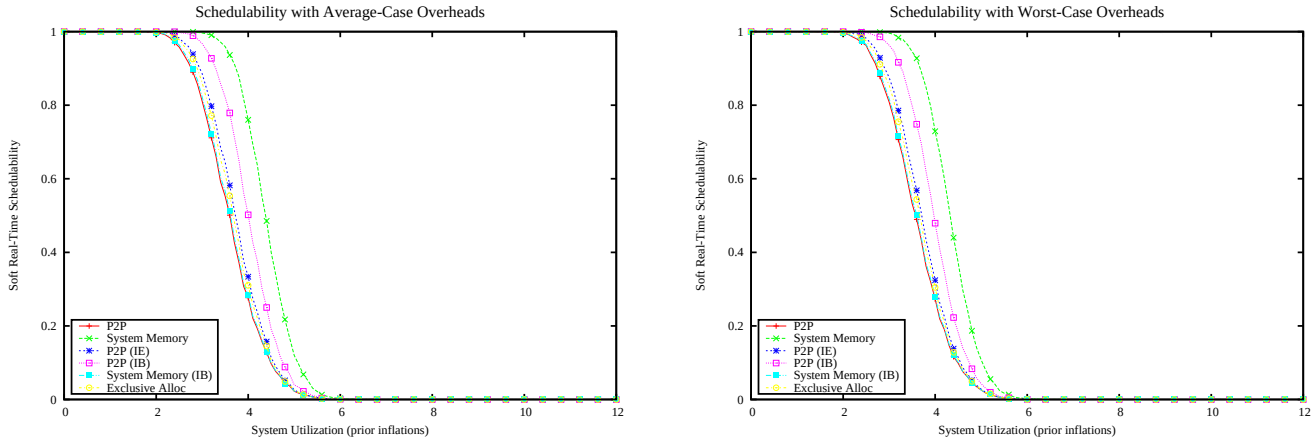

Figure 3090: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

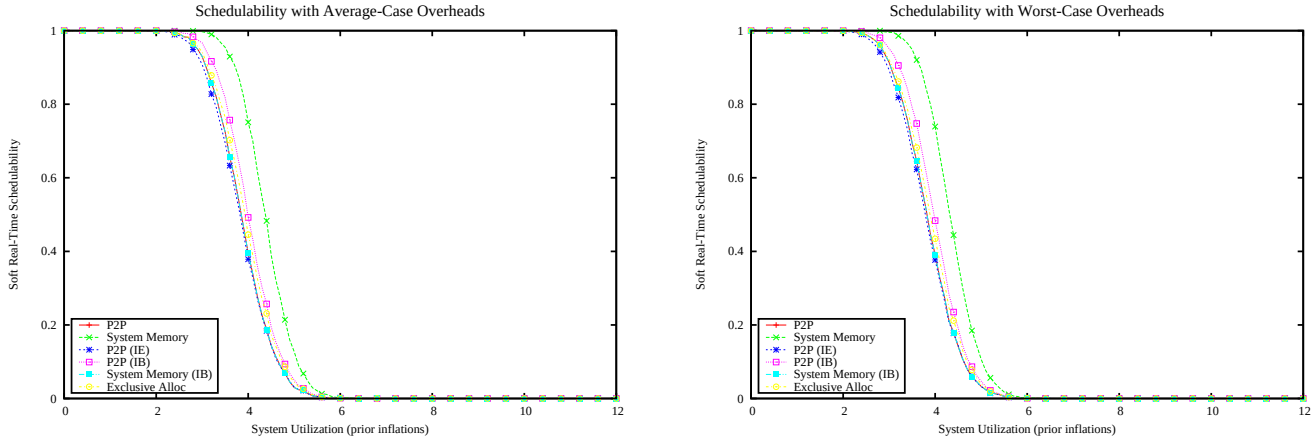

Figure 3091: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

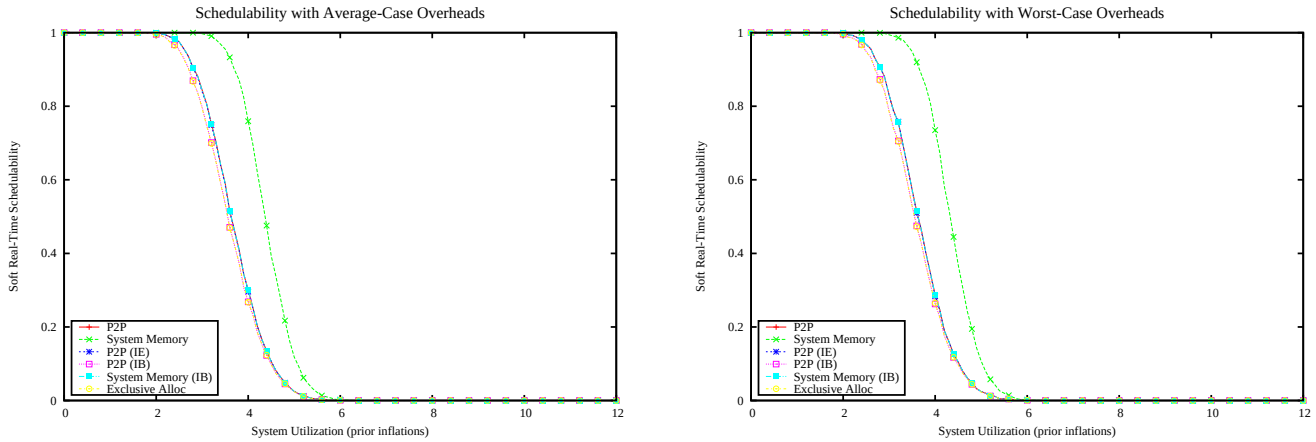

Figure 3092: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

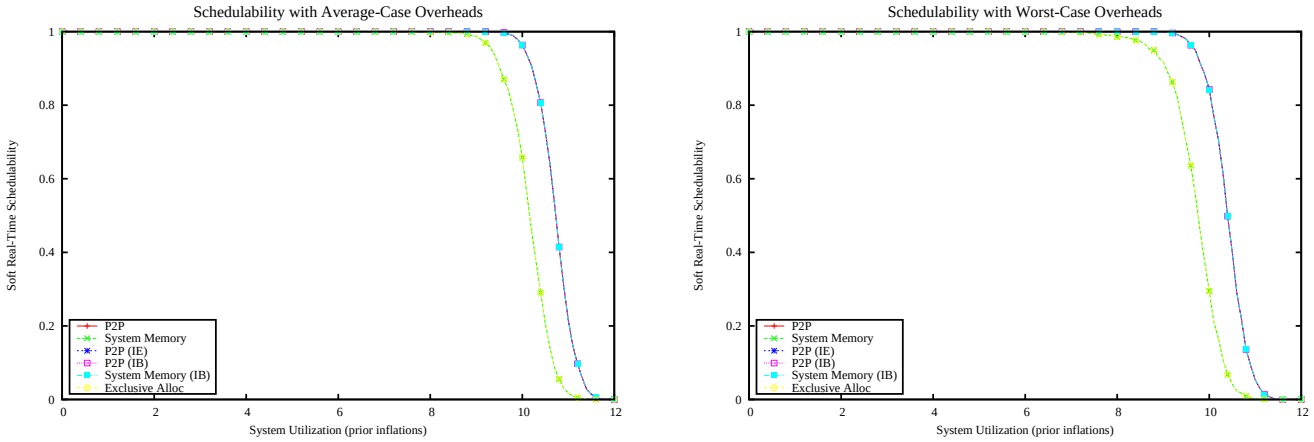

Figure 3093: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

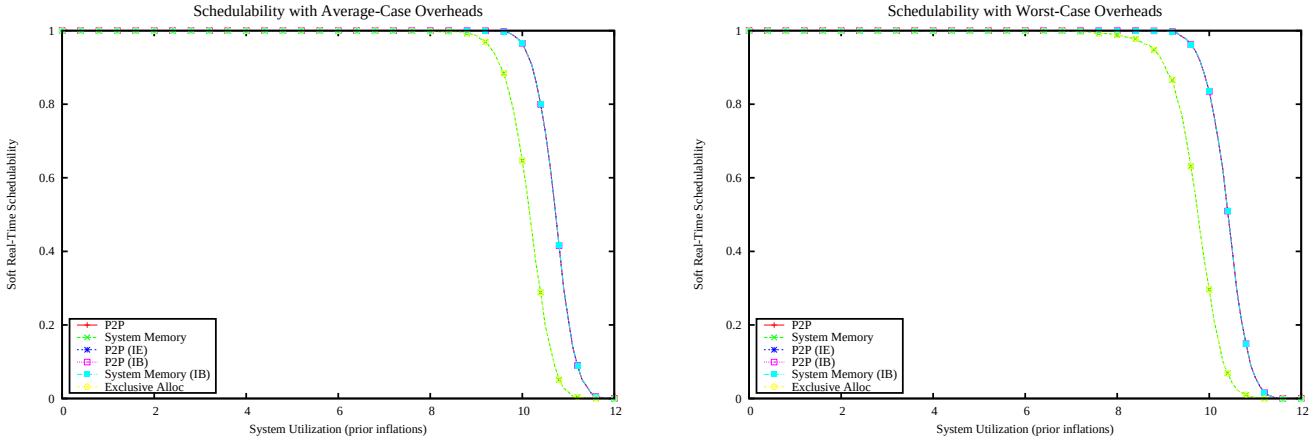

Figure 3094: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

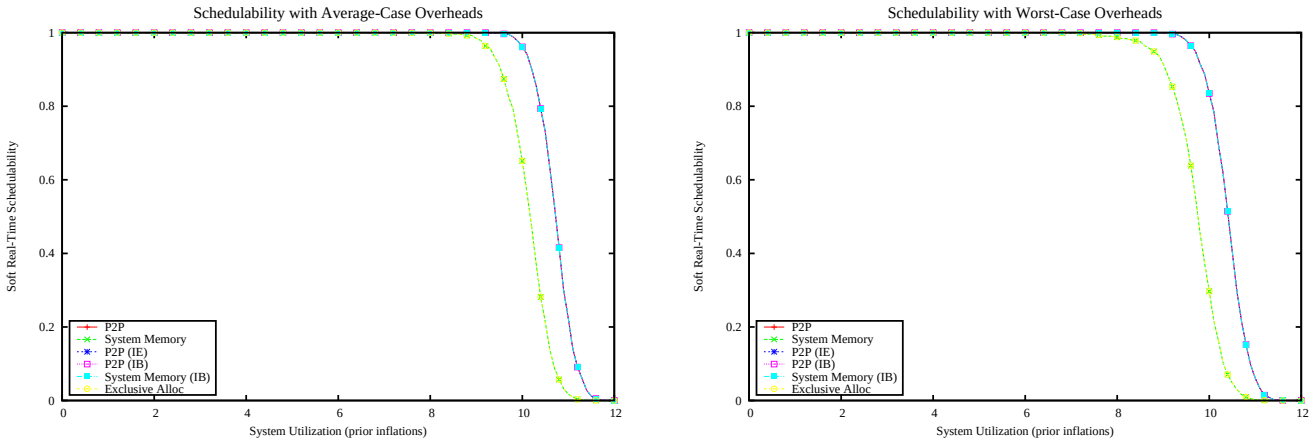

Figure 3095: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

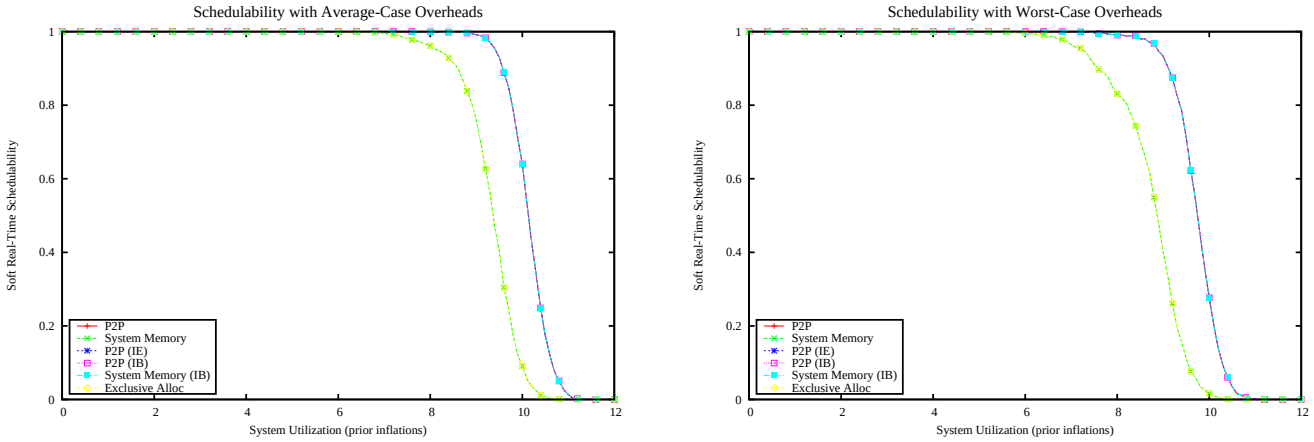

Figure 3096: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

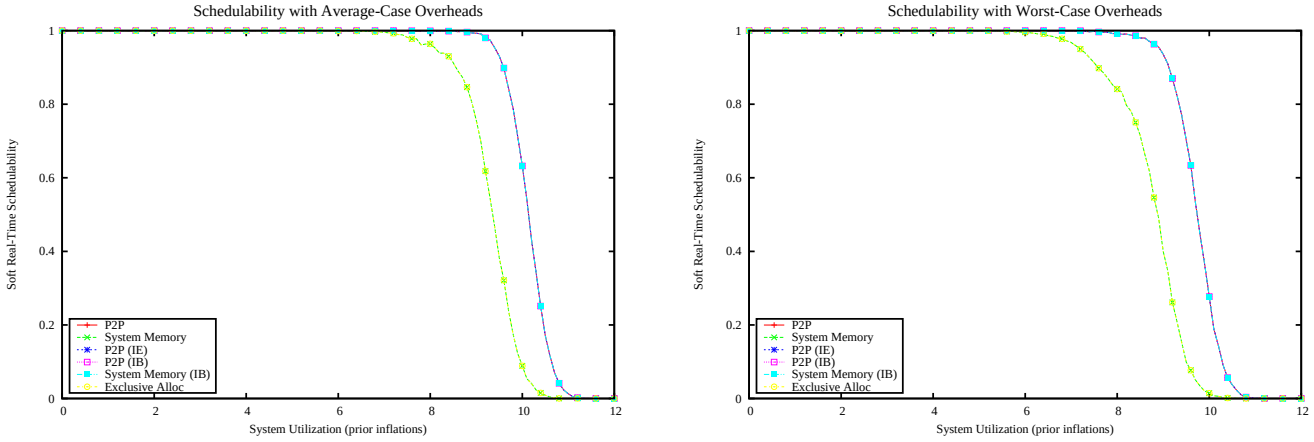

Figure 3097: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

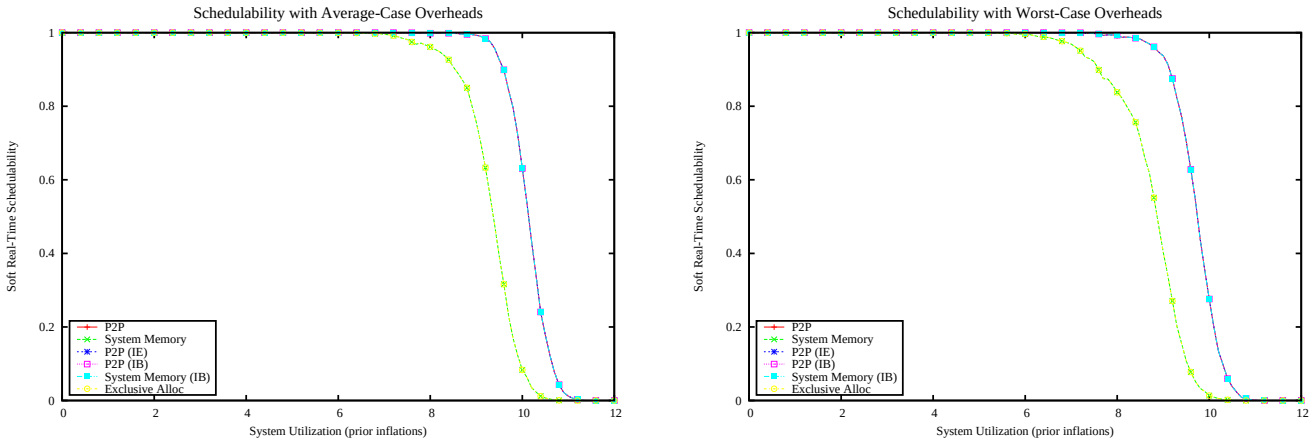

Figure 3098: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

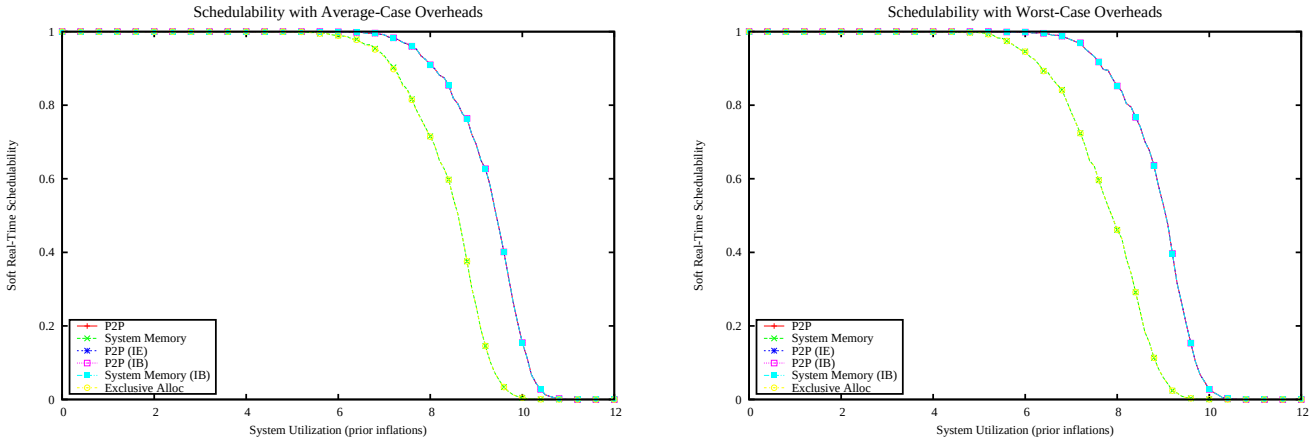

Figure 3099: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

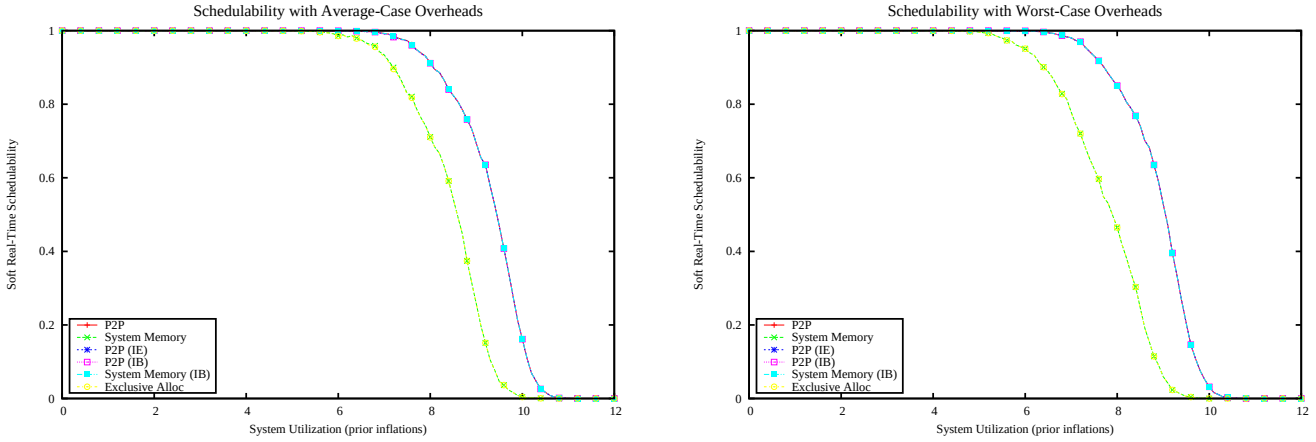

Figure 3100: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

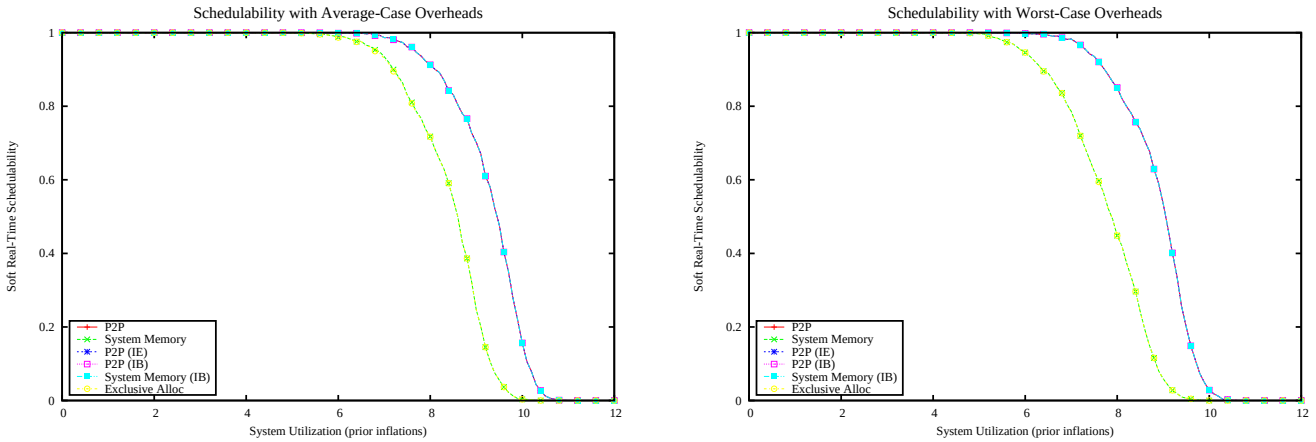

Figure 3101: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

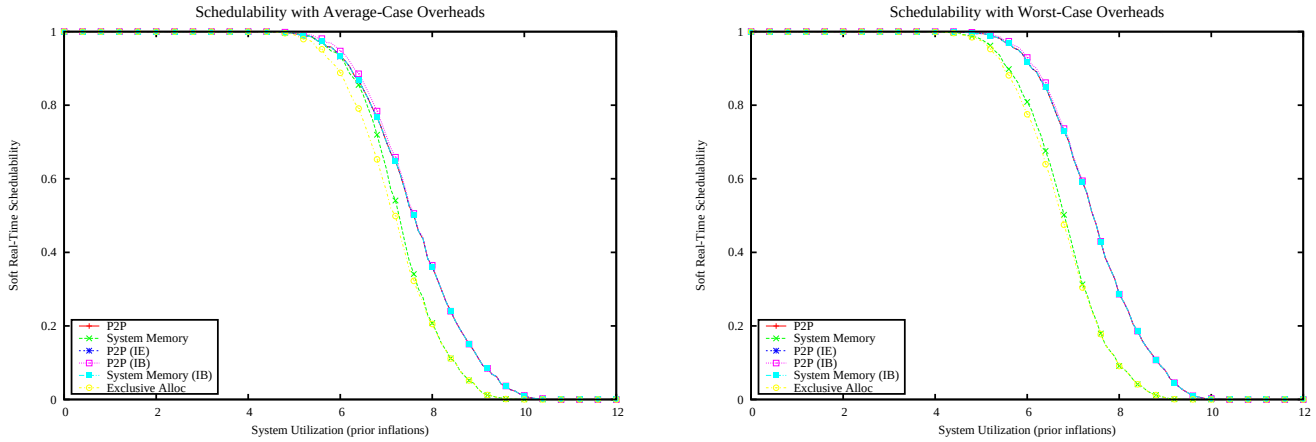

Figure 3102: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

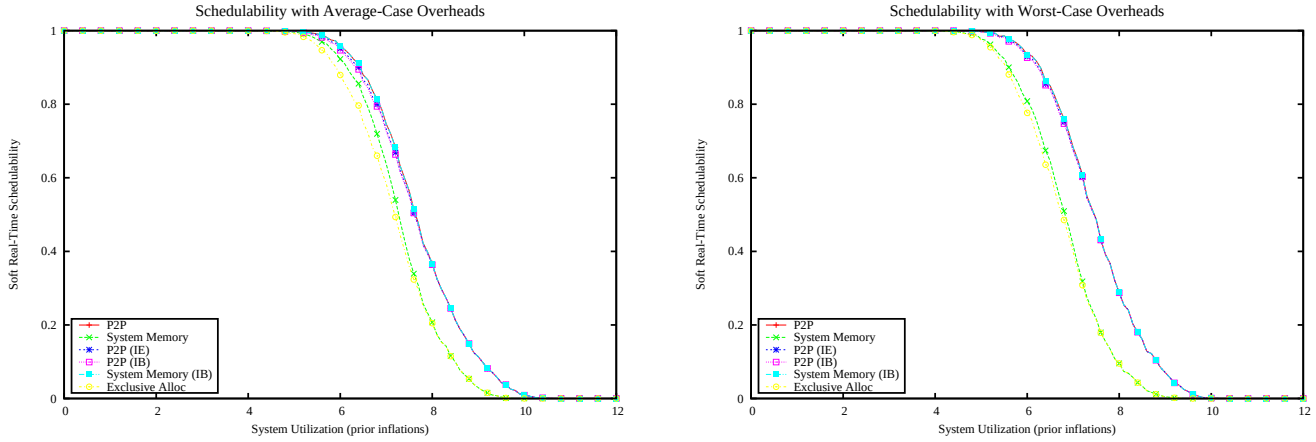

Figure 3103: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

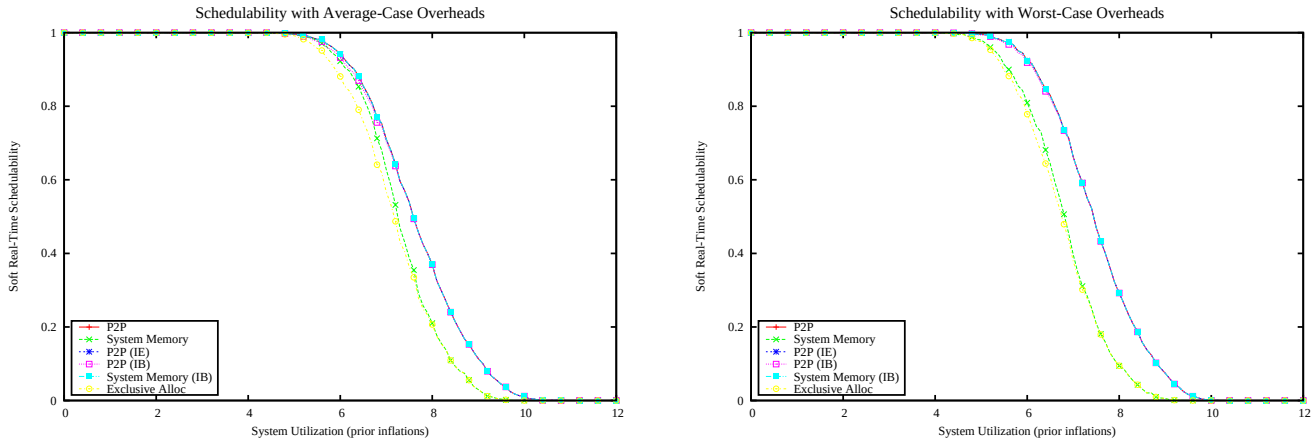

Figure 3104: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

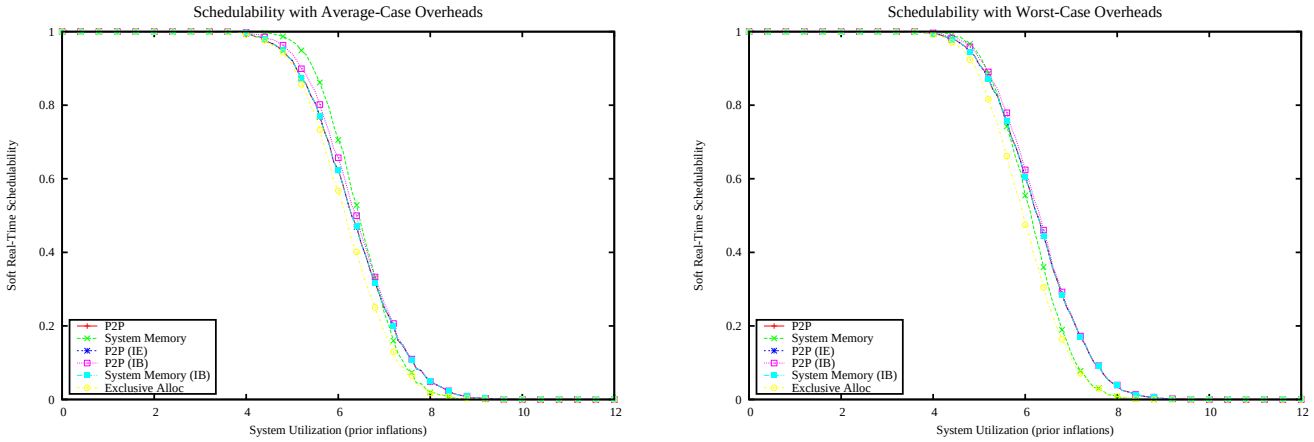

Figure 3105: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

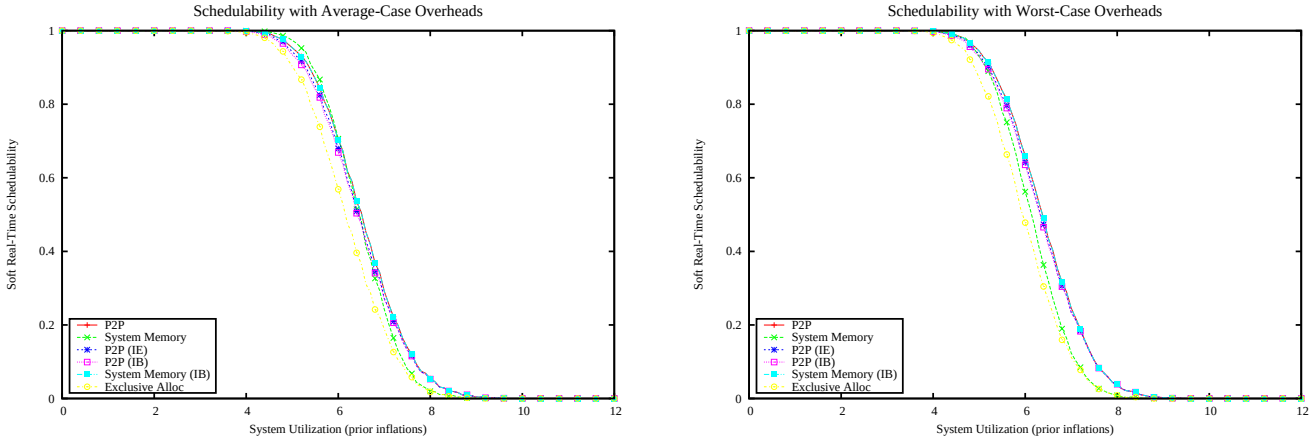

Figure 3106: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

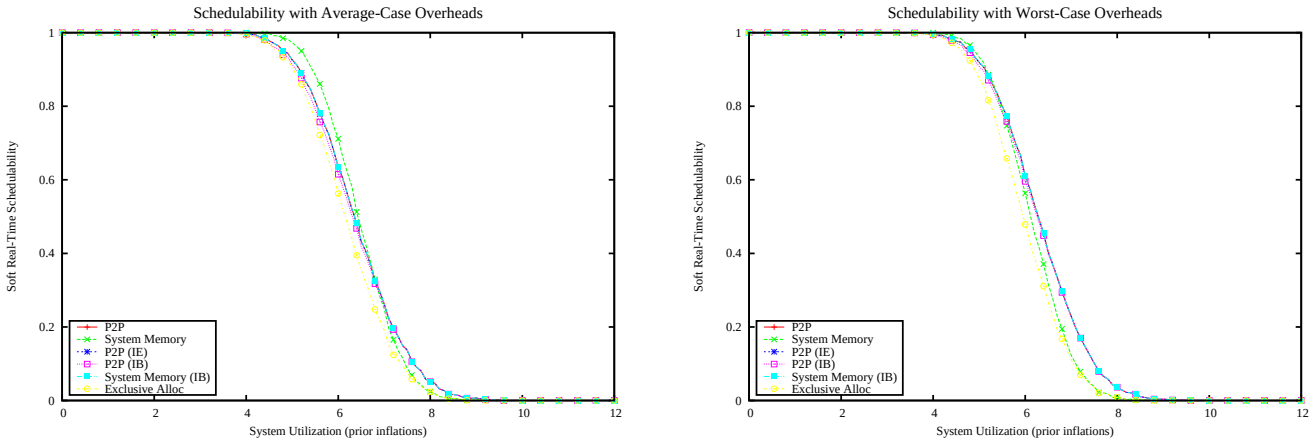

Figure 3107: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

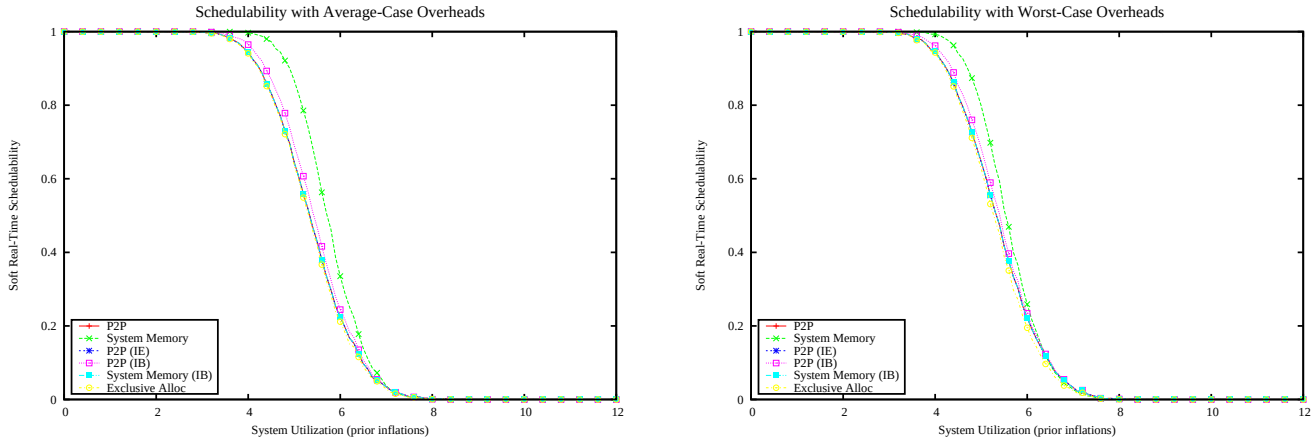

Figure 3108: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

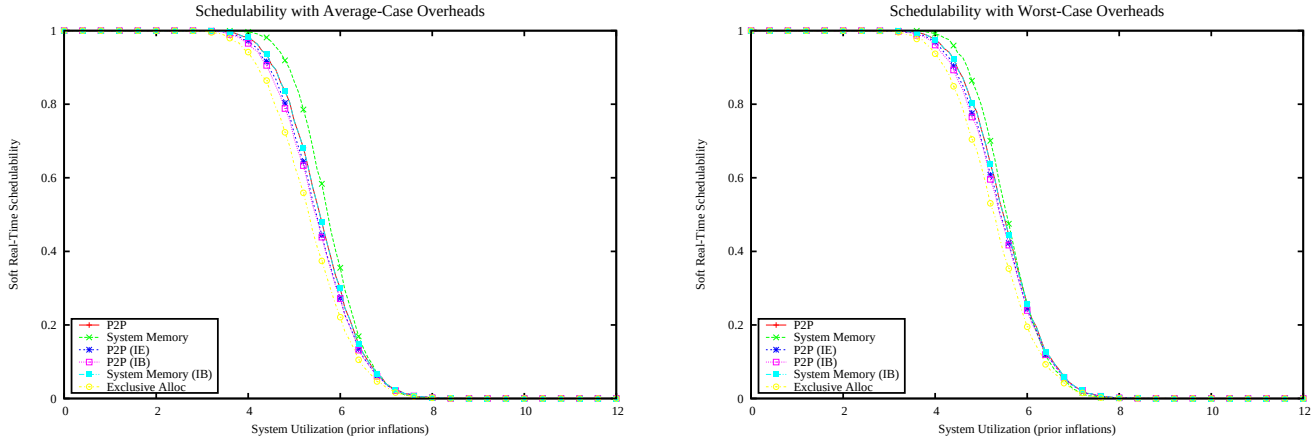

Figure 3109: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

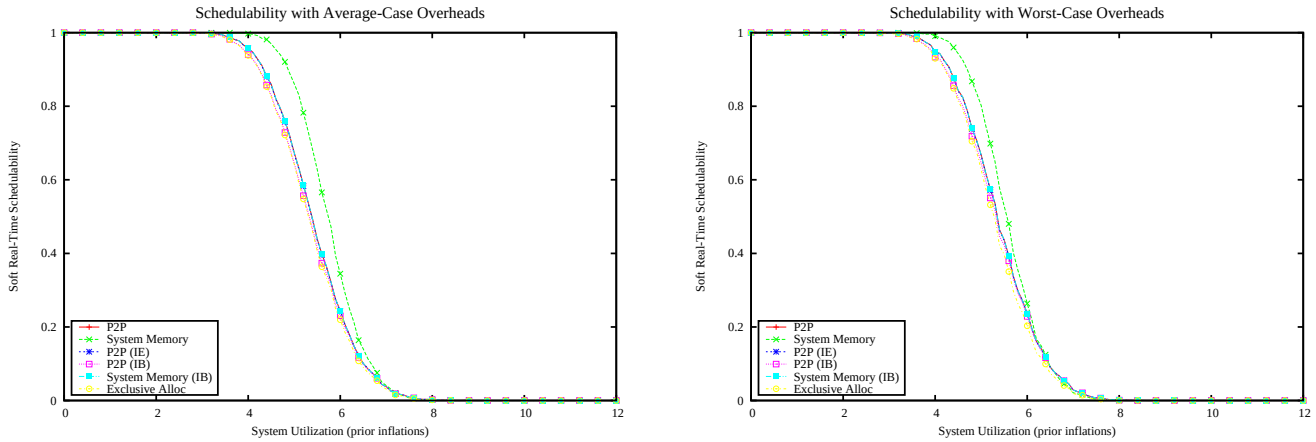

Figure 3110: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

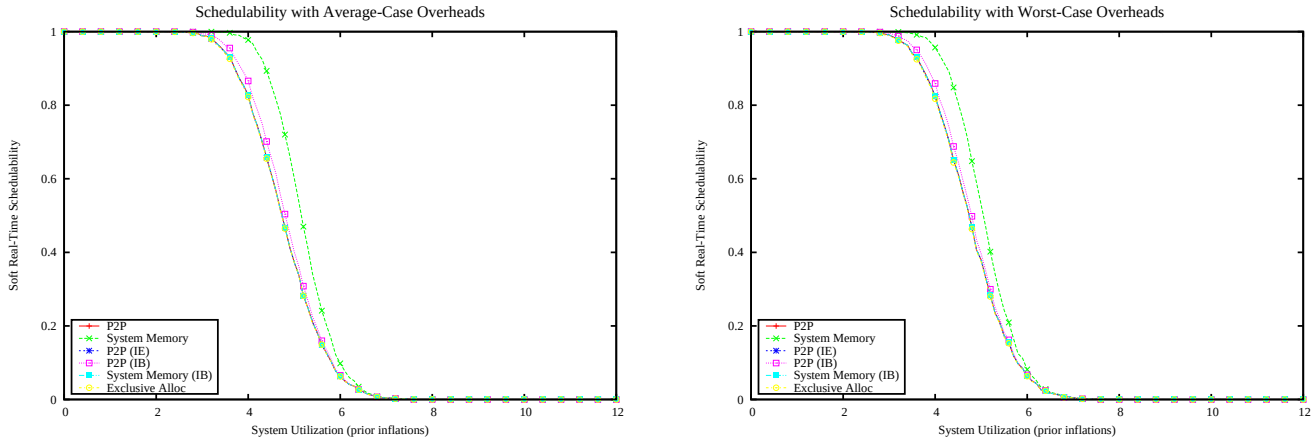

Figure 3111: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

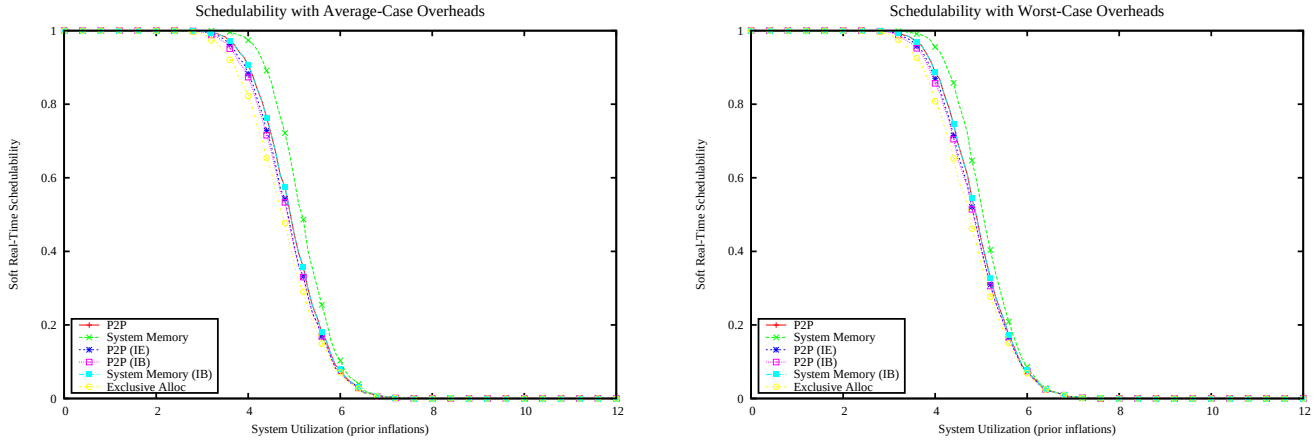

Figure 3112: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

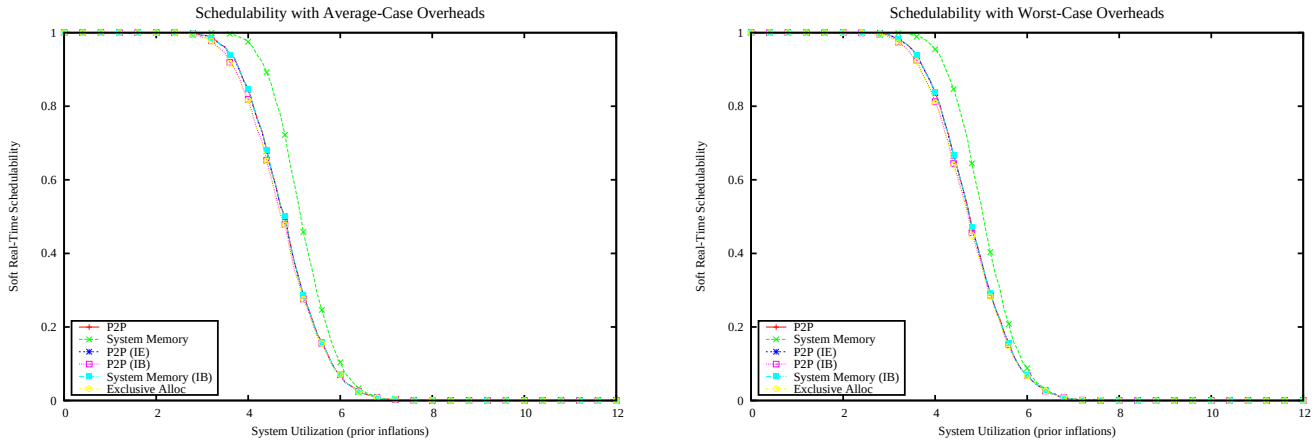

Figure 3113: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

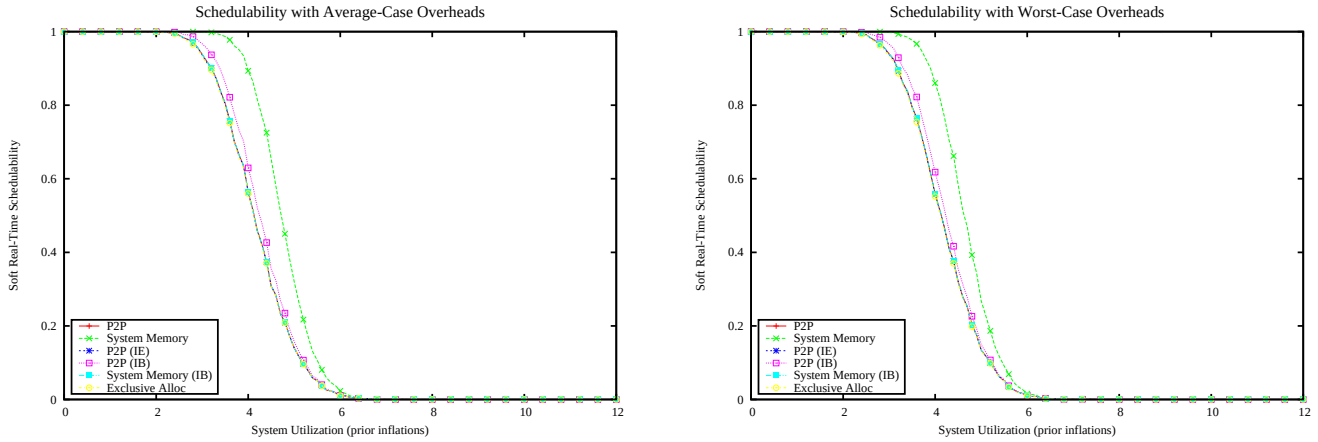

Figure 3114: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

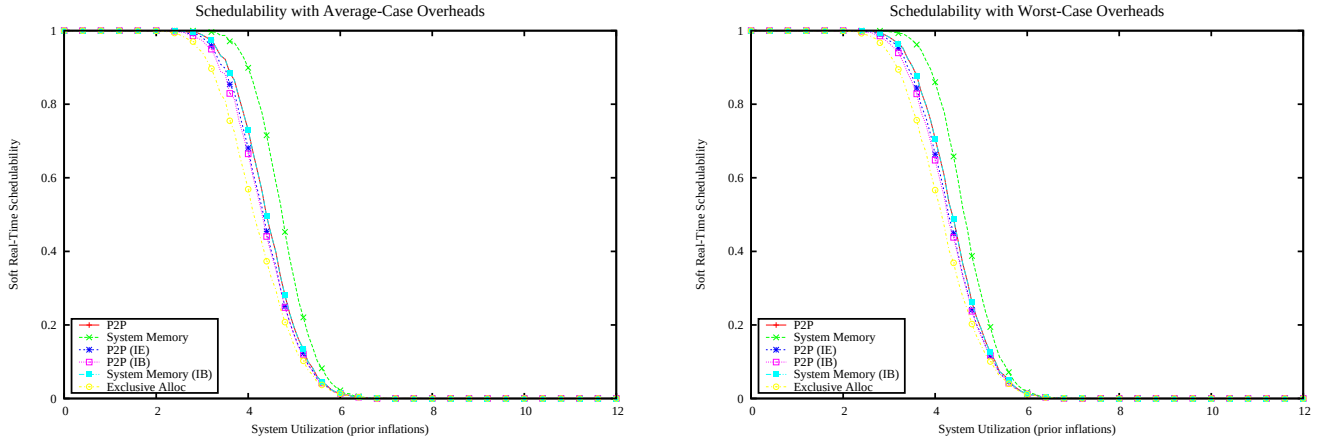

Figure 3115: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

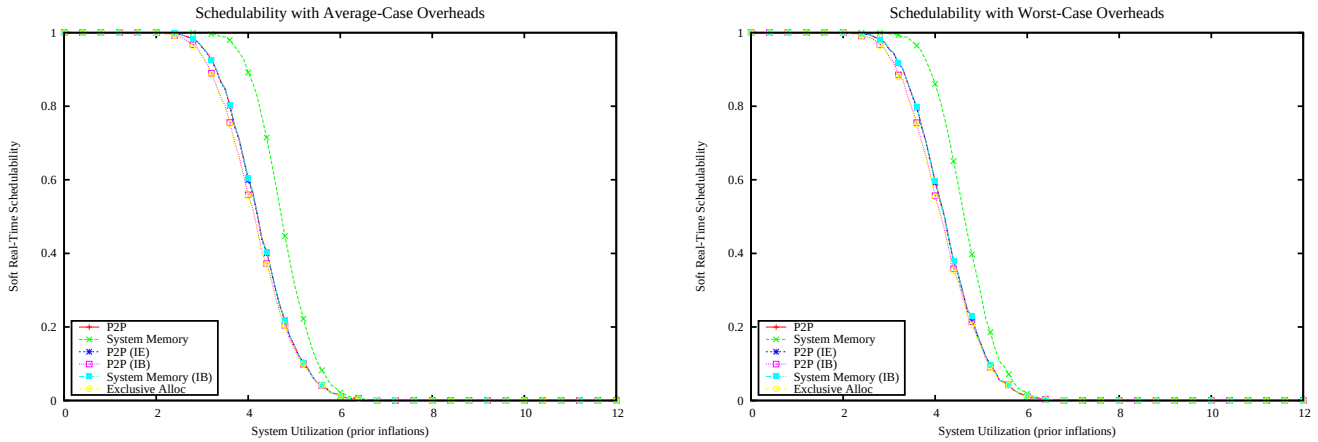

Figure 3116: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

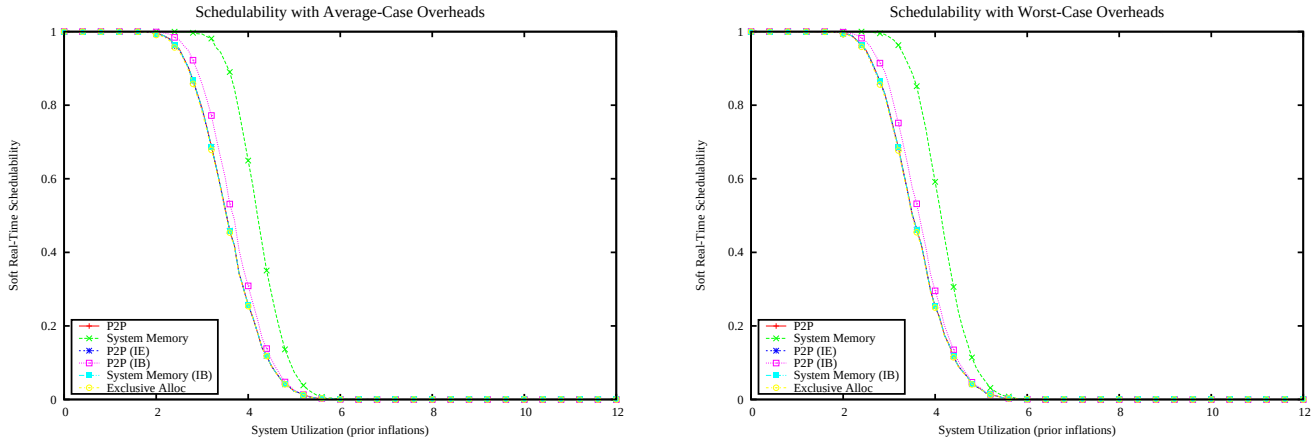

Figure 3117: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

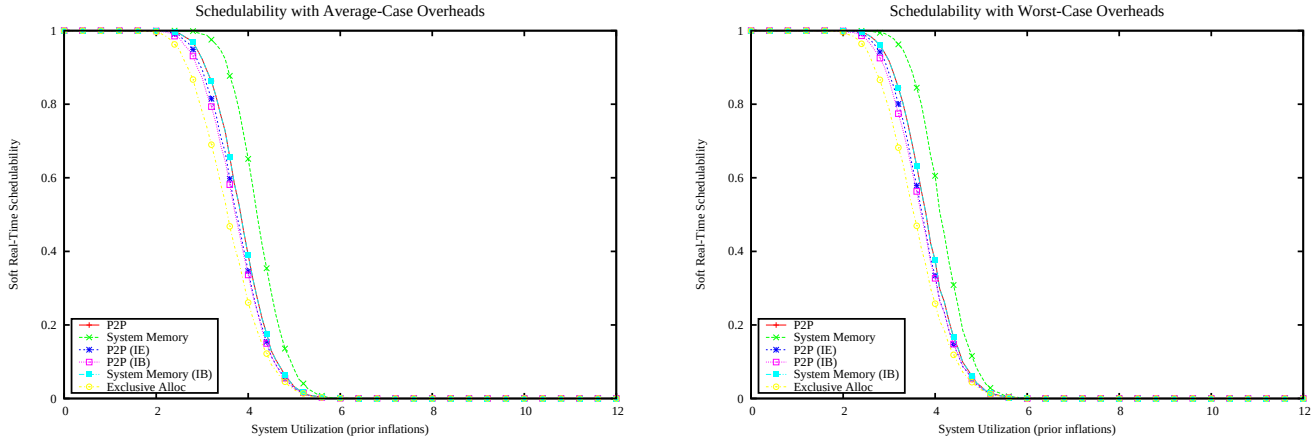

Figure 3118: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

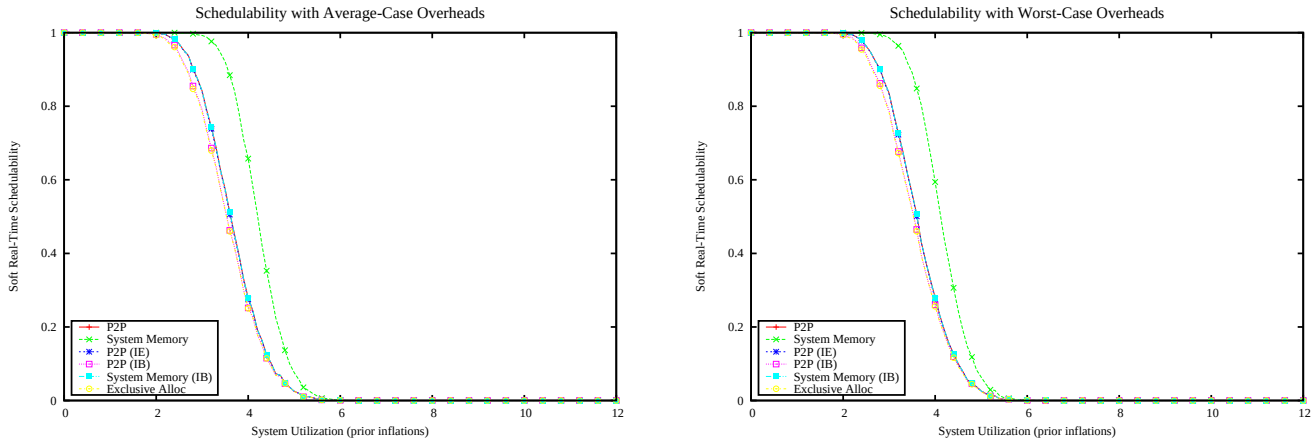

Figure 3119: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

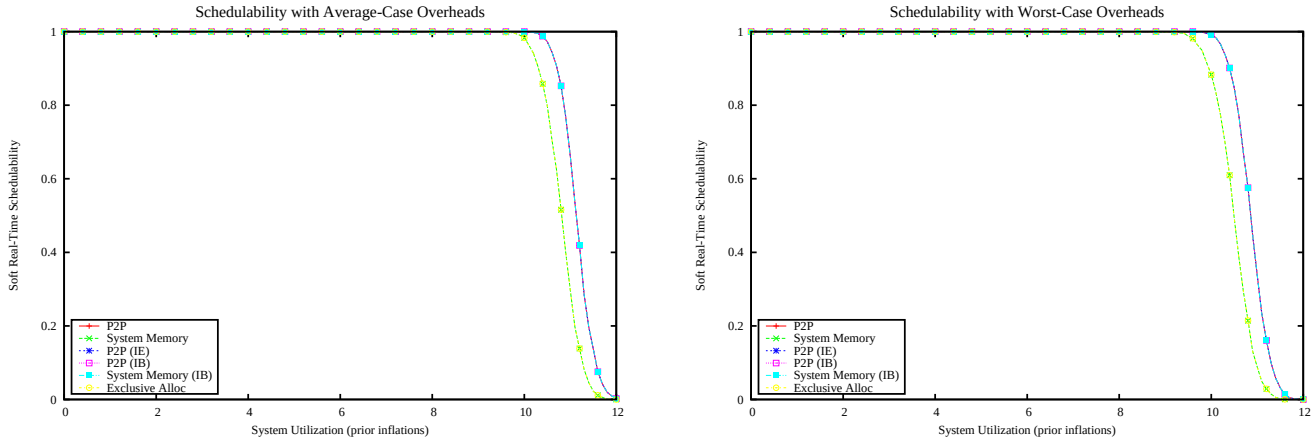

Figure 3120: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

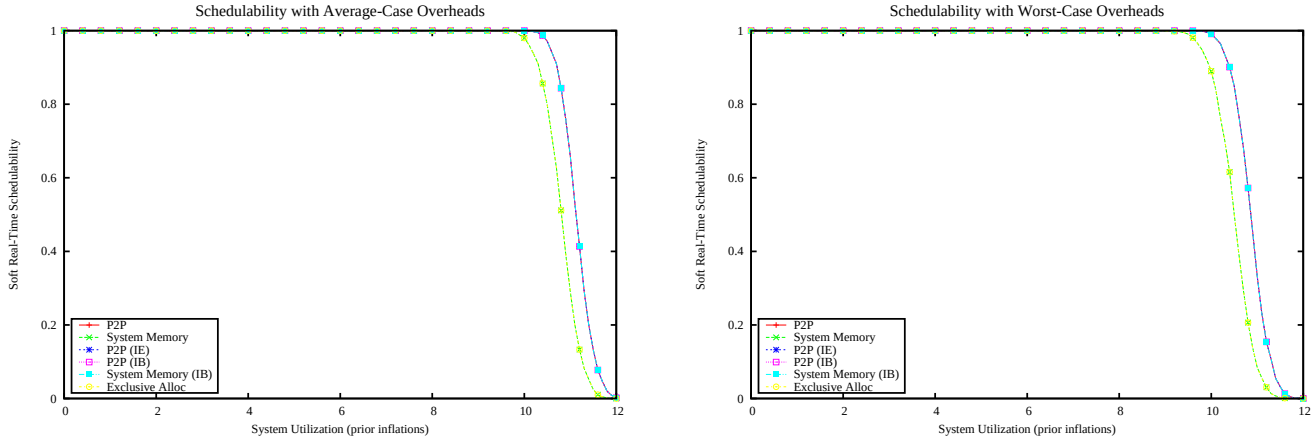

Figure 3121: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

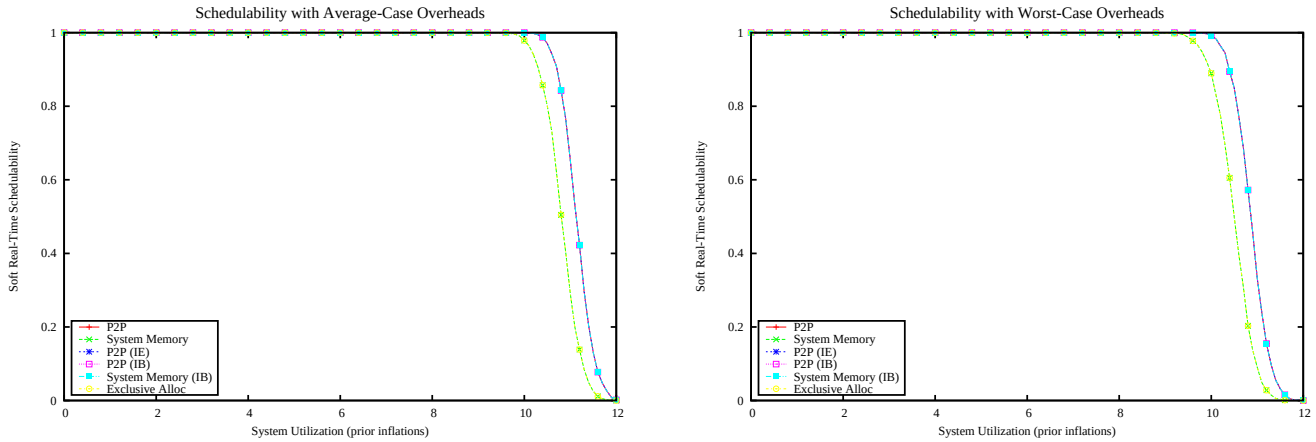

Figure 3122: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

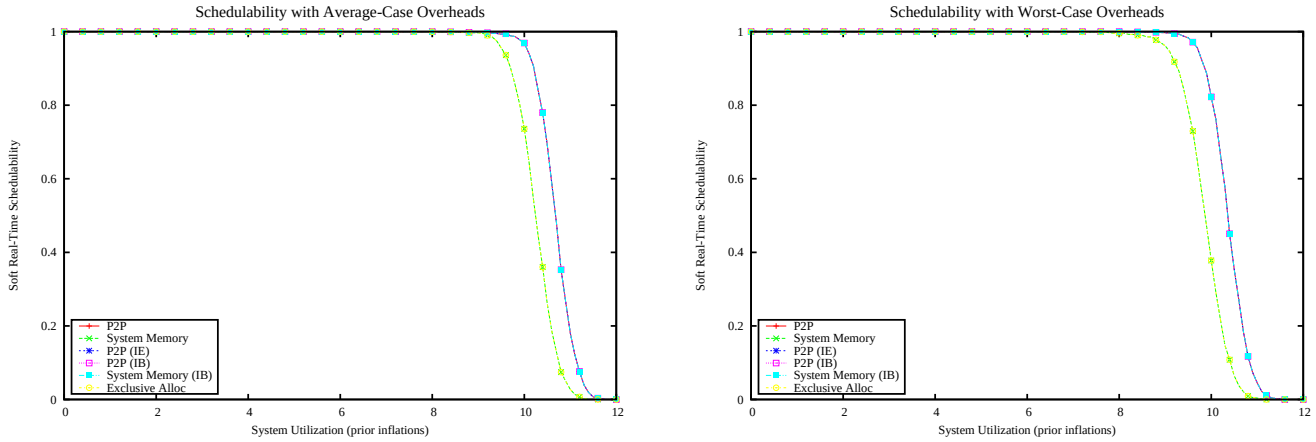

Figure 3123: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

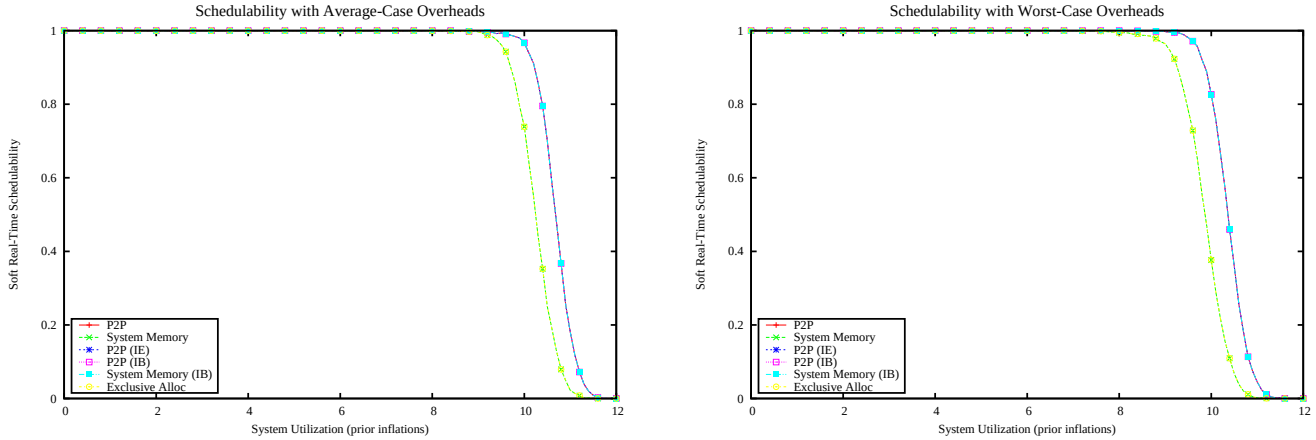

Figure 3124: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

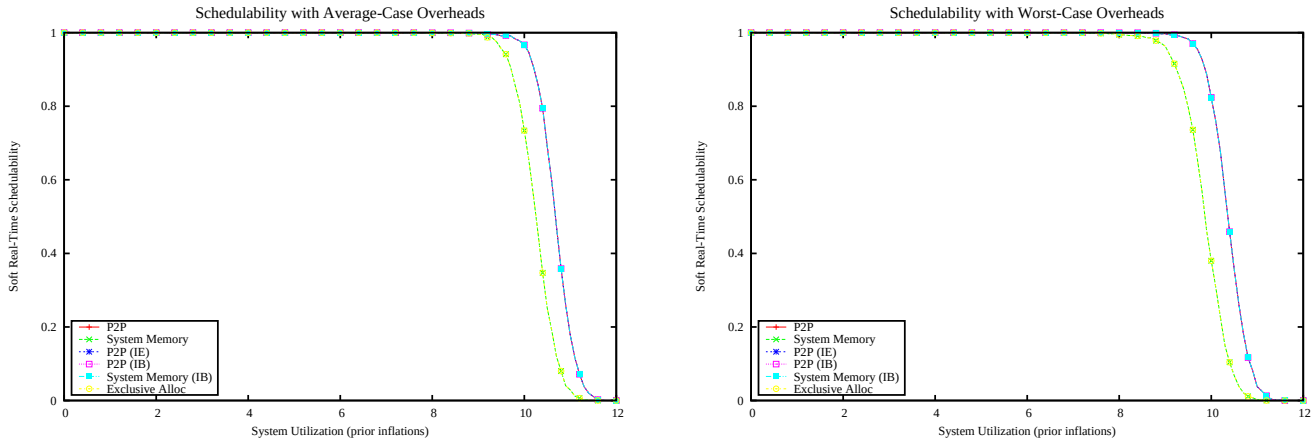

Figure 3125: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

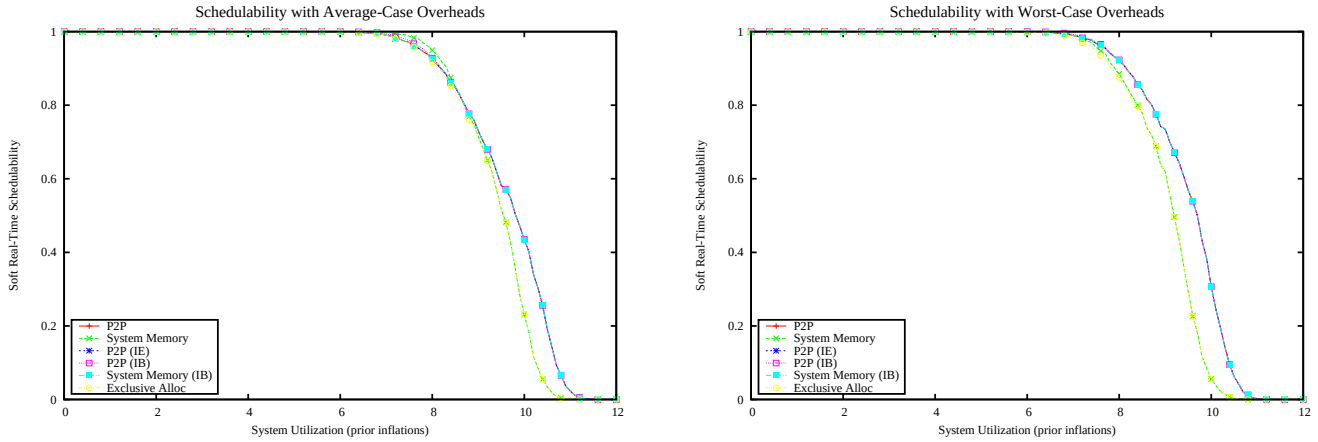

Figure 3126: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

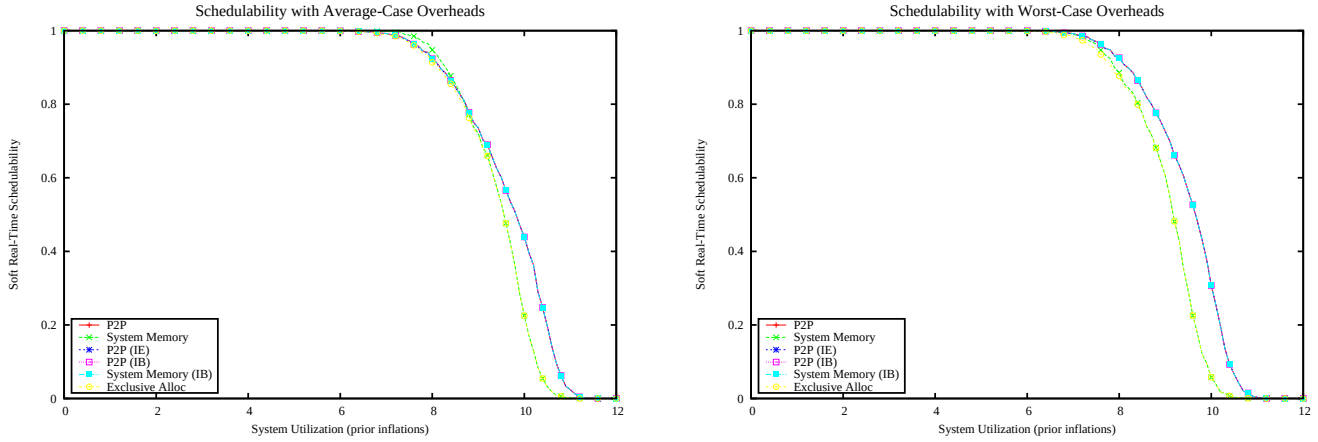

Figure 3127: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

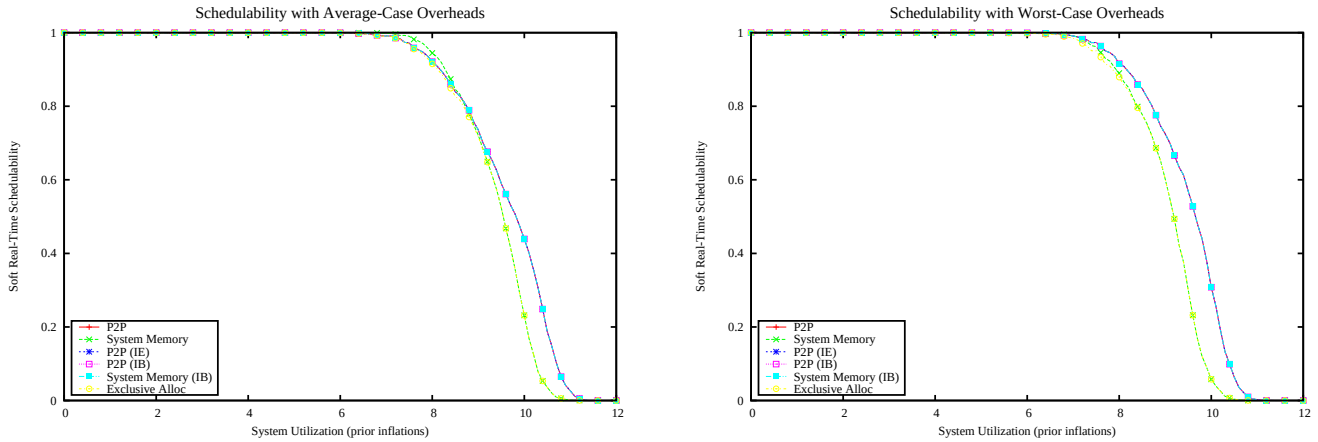

Figure 3128: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

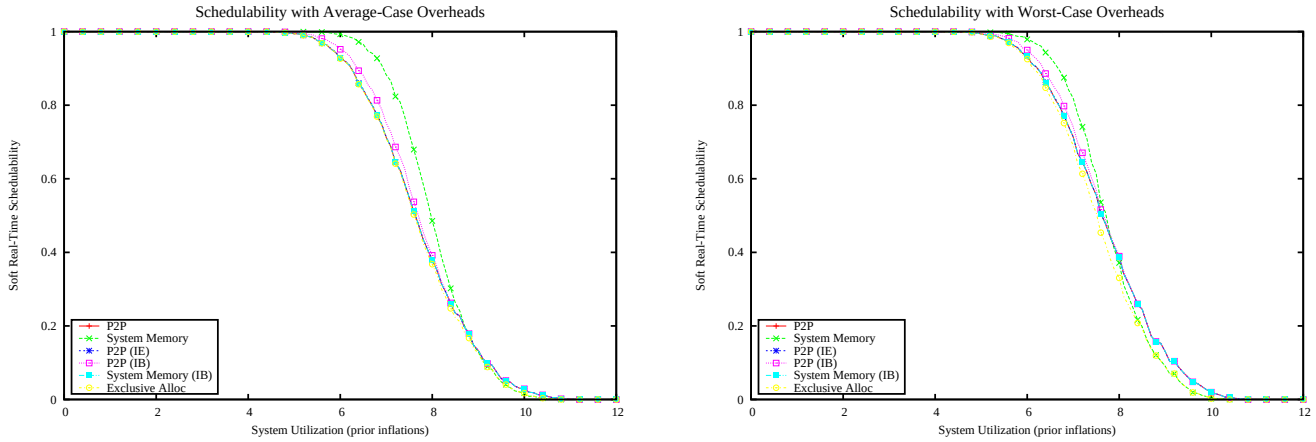

Figure 3129: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

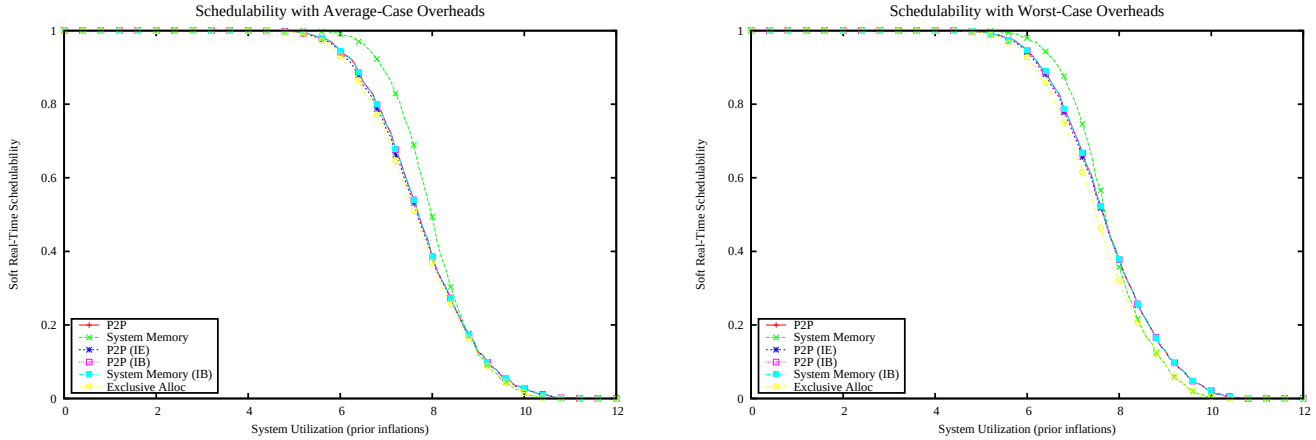

Figure 3130: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

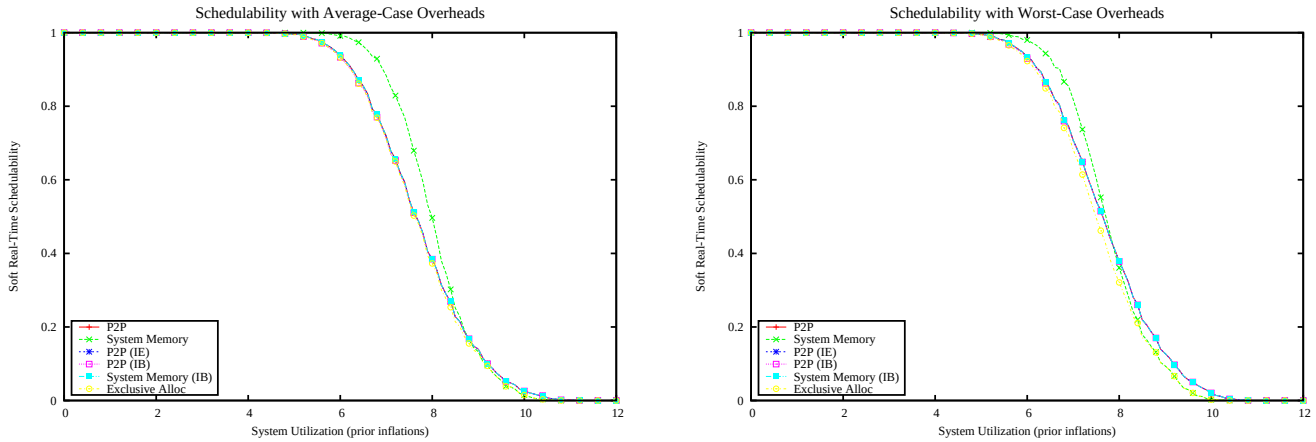

Figure 3131: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

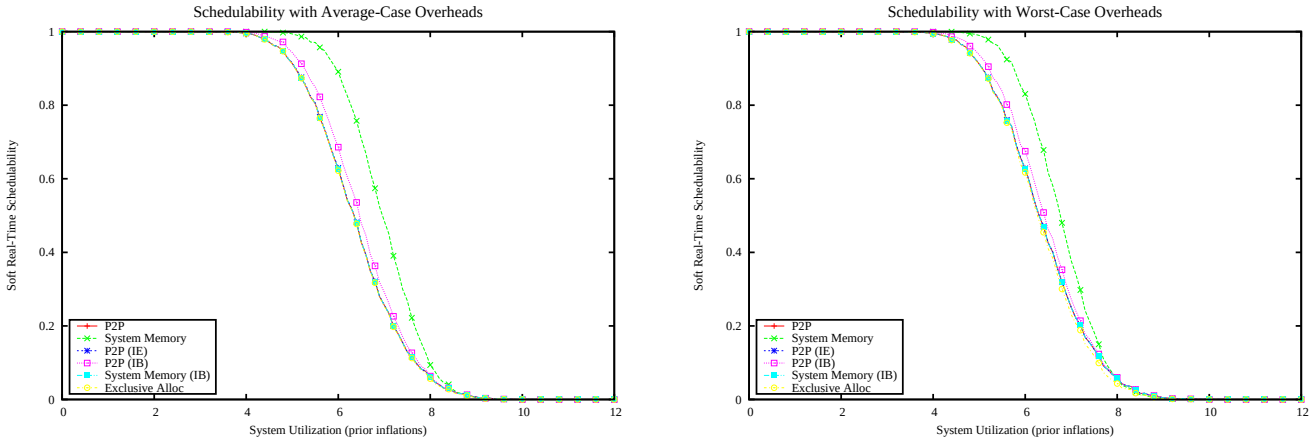

Figure 3132: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

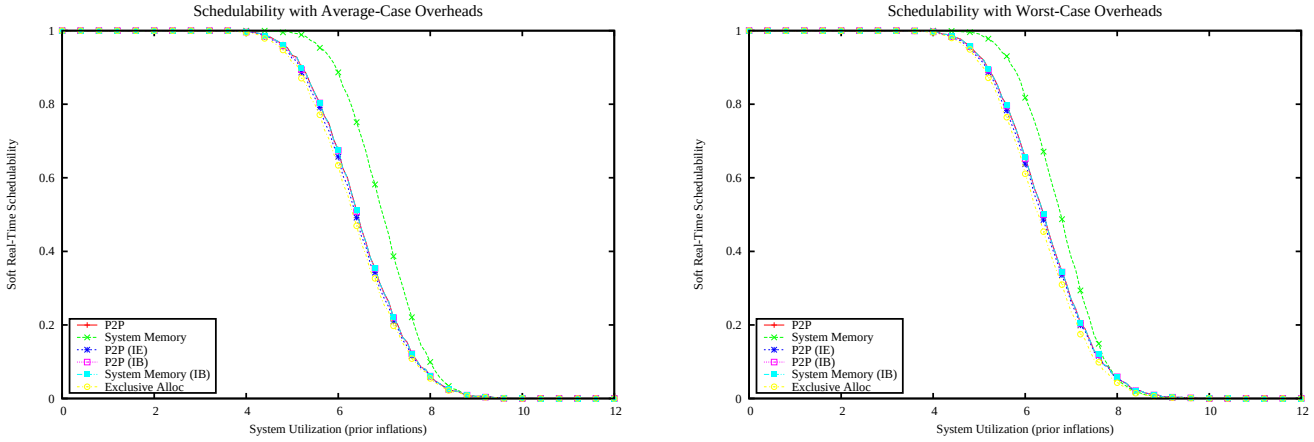

Figure 3133: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

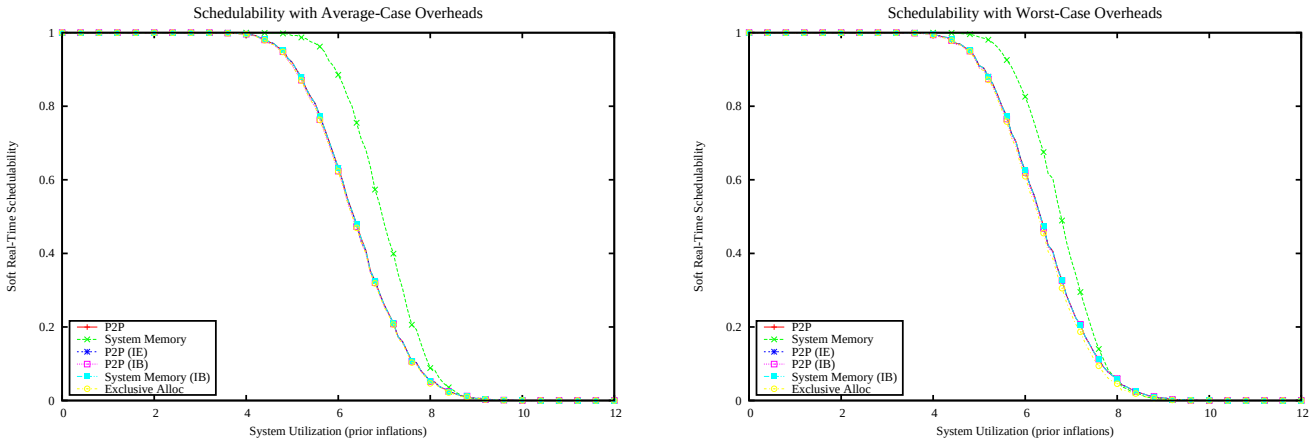

Figure 3134: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

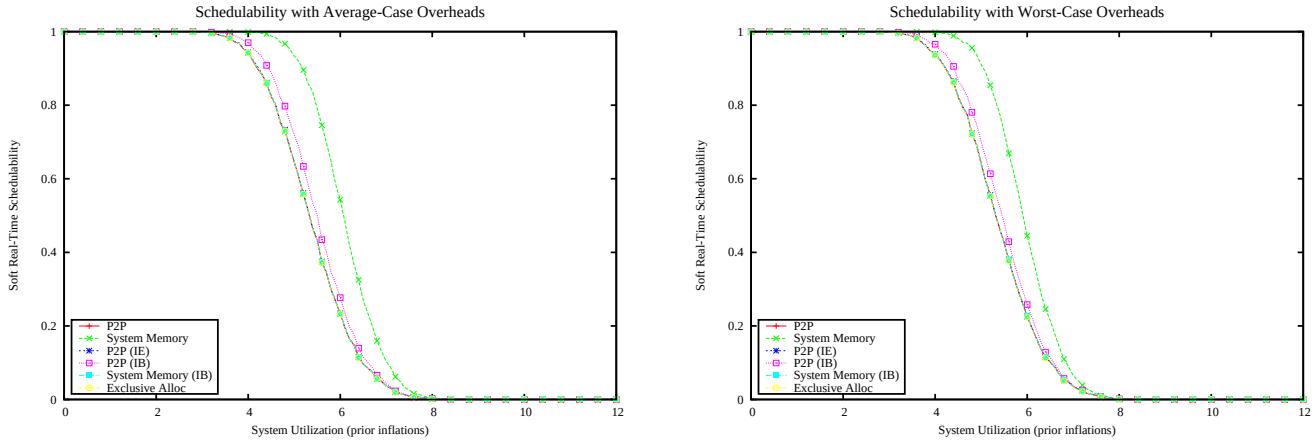

Figure 3135: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

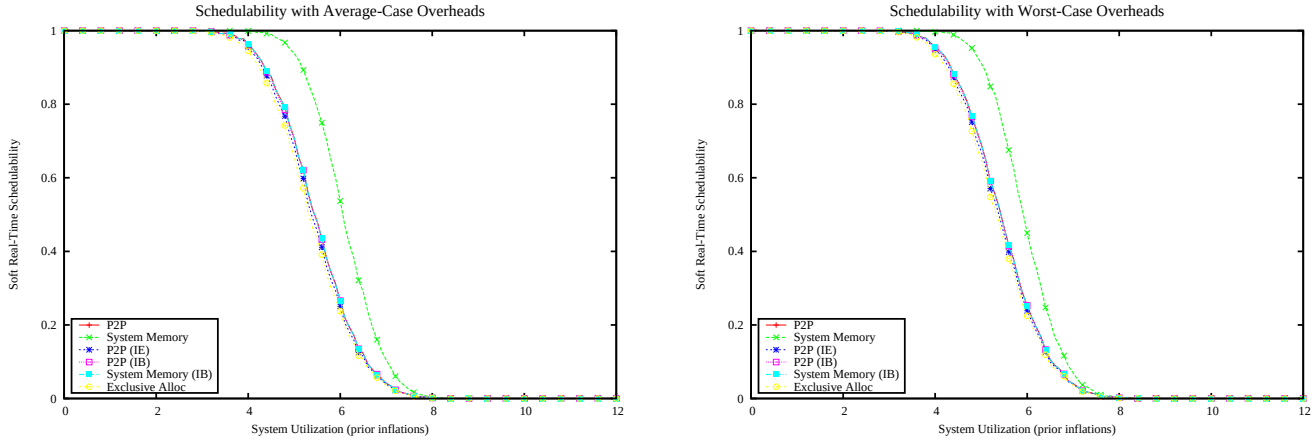

Figure 3136: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

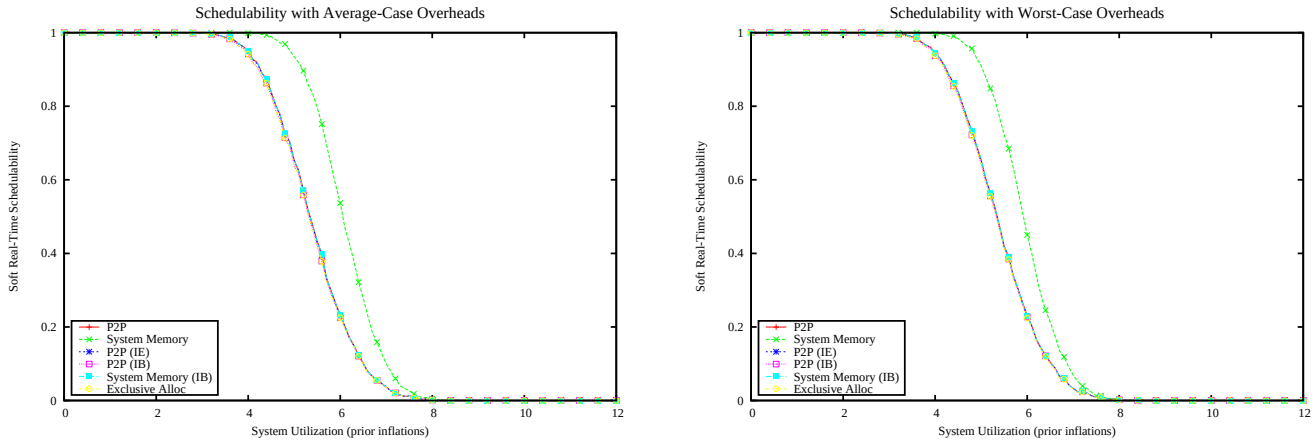

Figure 3137: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

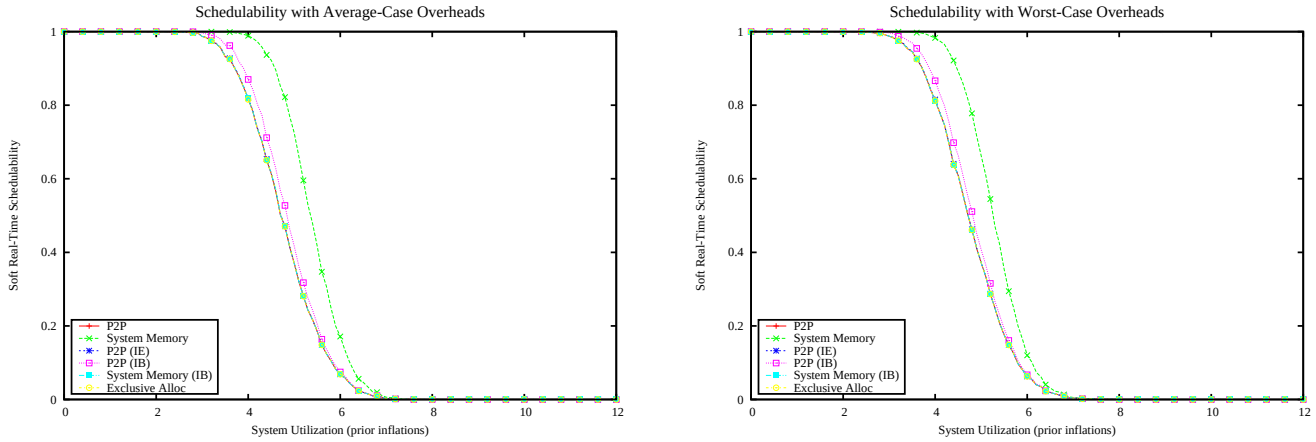

Figure 3138: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

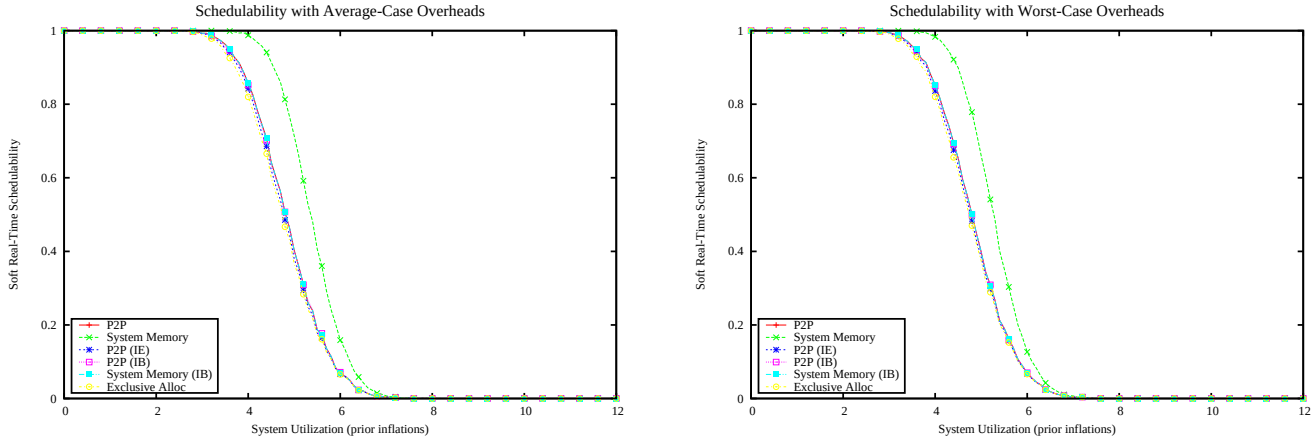

Figure 3139: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

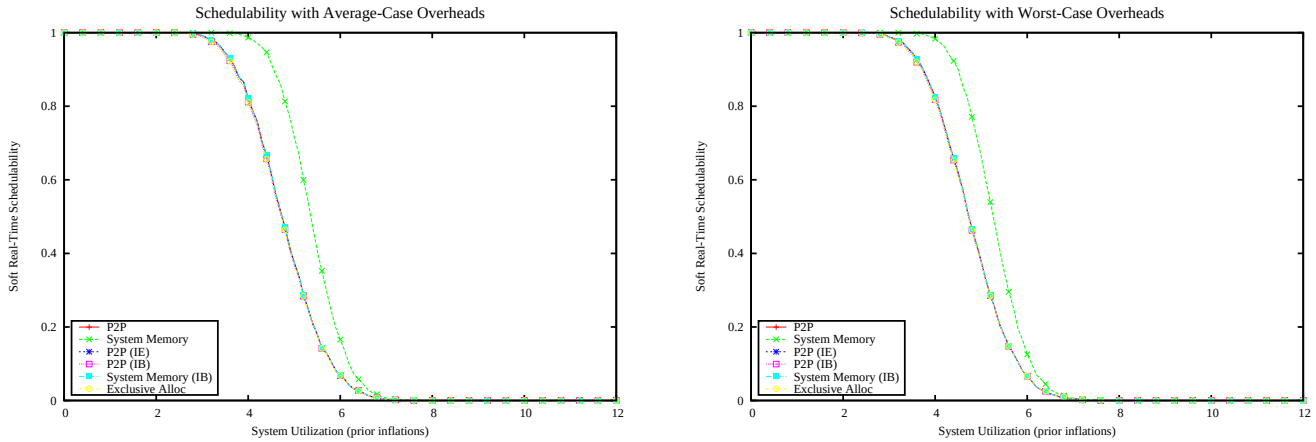

Figure 3140: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

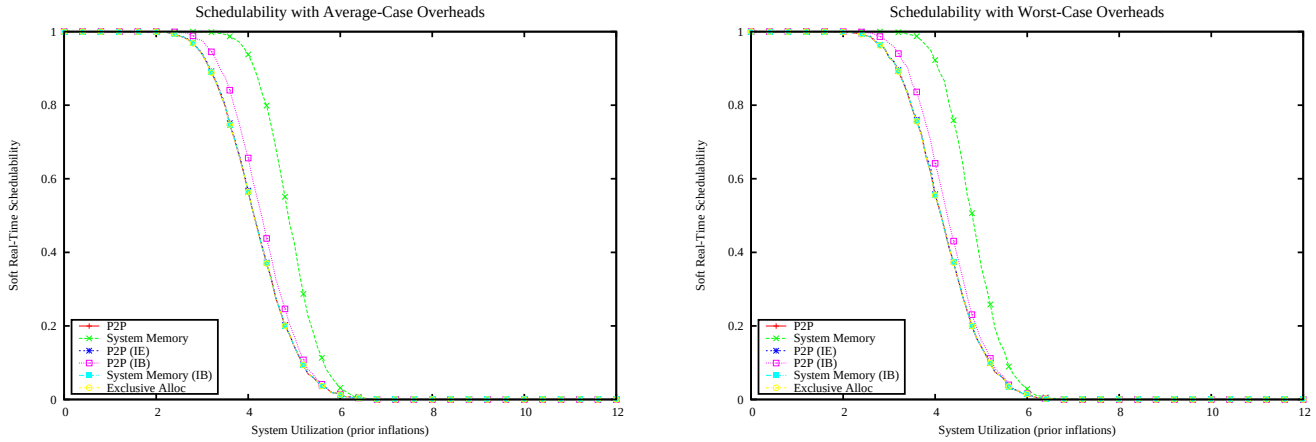

Figure 3141: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

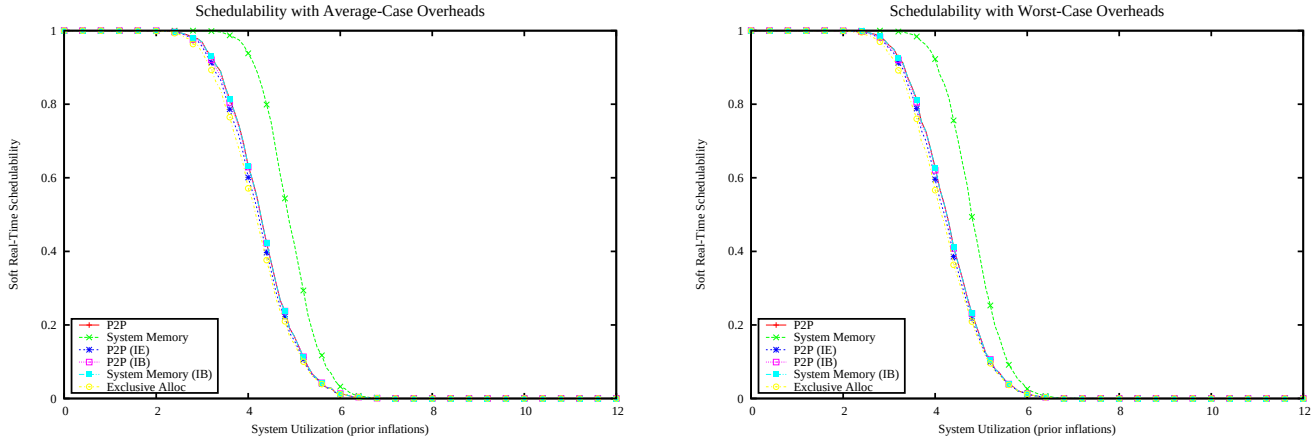

Figure 3142: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

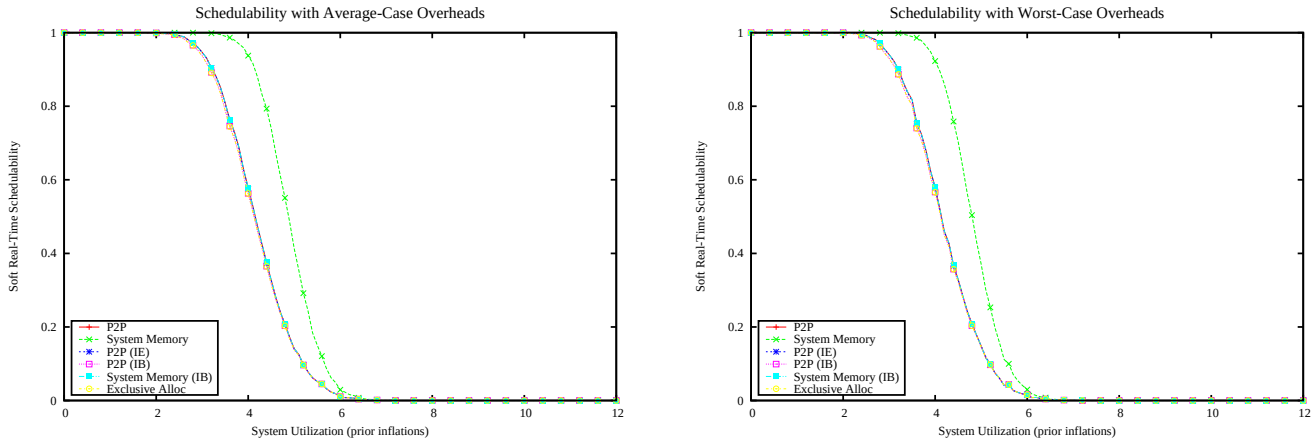

Figure 3143: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

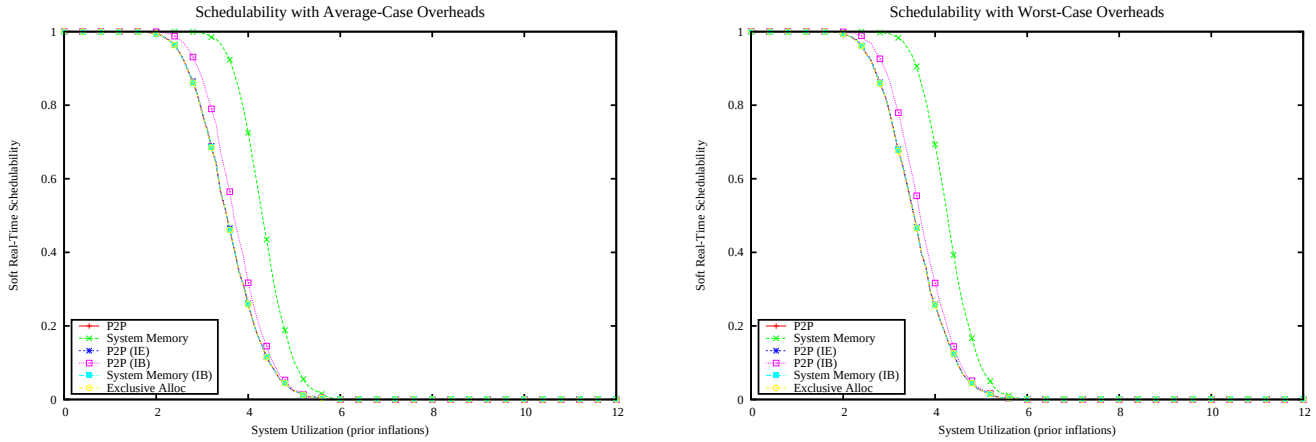

Figure 3144: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

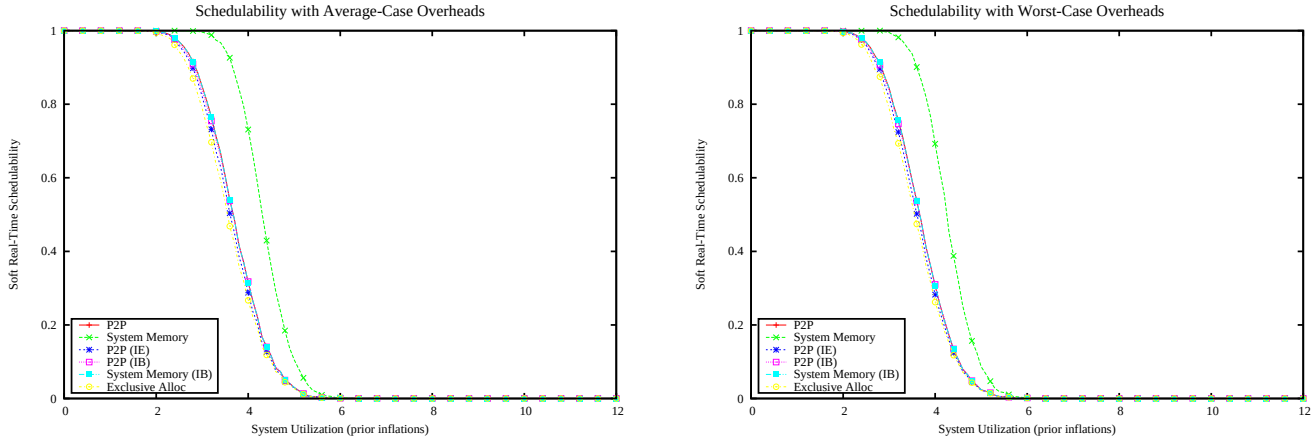

Figure 3145: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

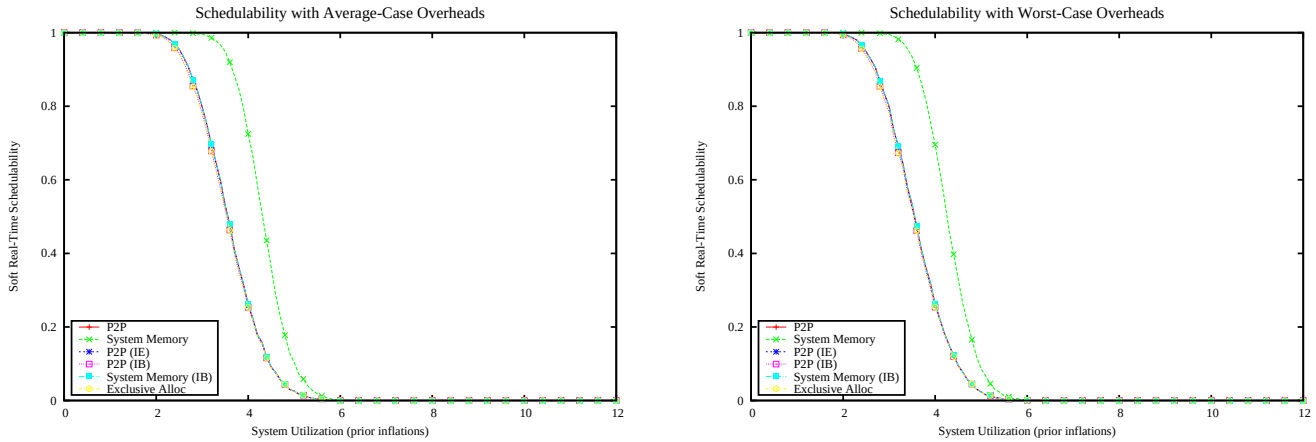

Figure 3146: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

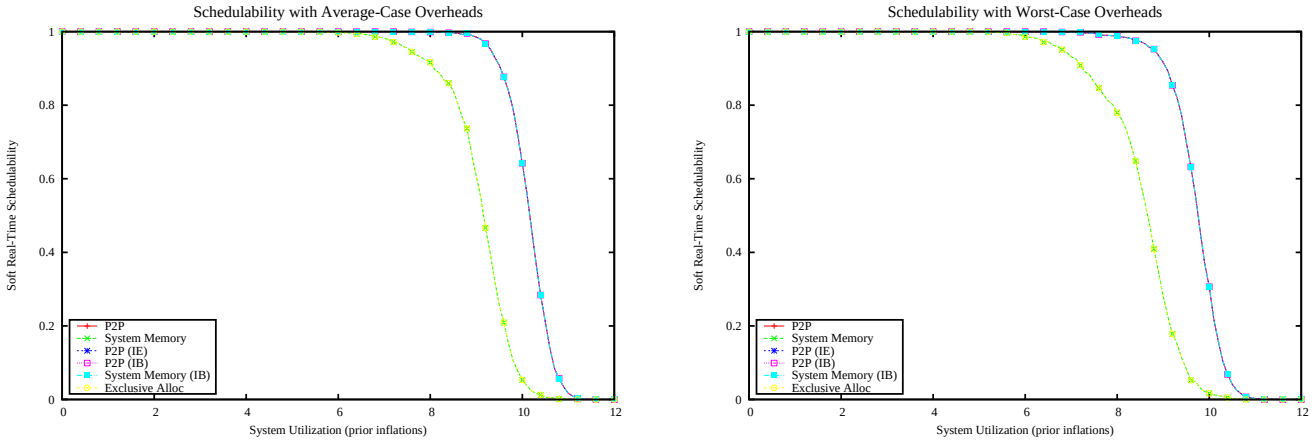

Figure 3147: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

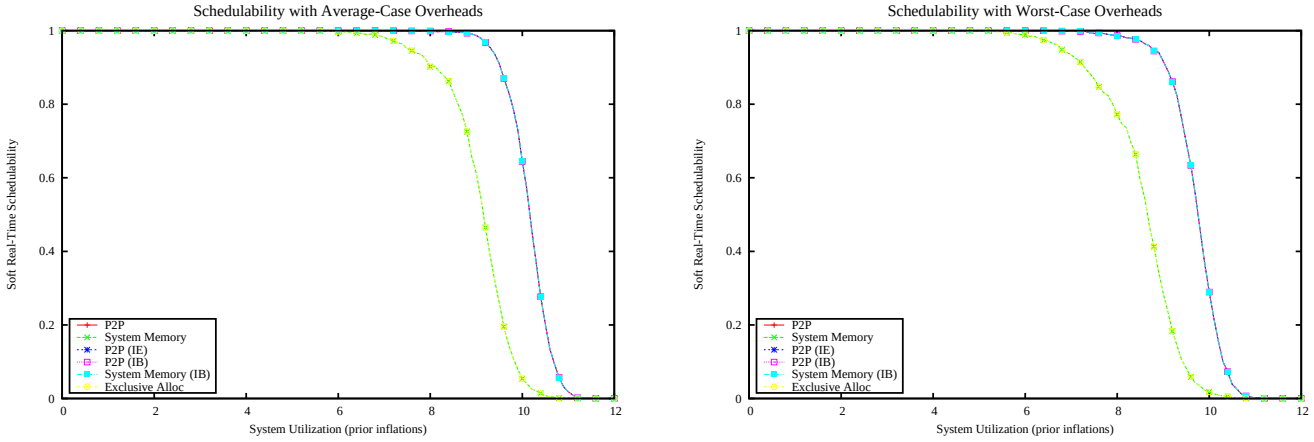

Figure 3148: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

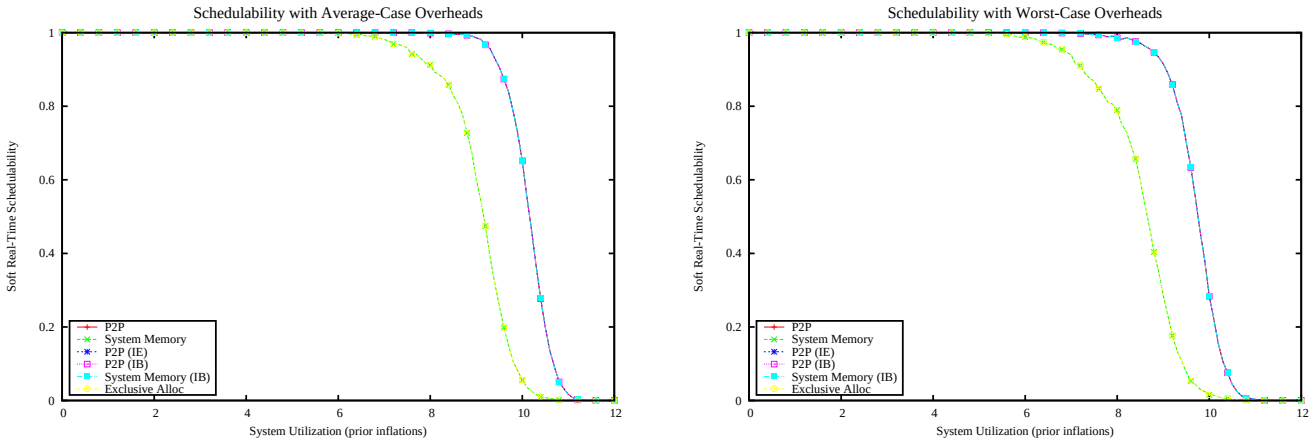

Figure 3149: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

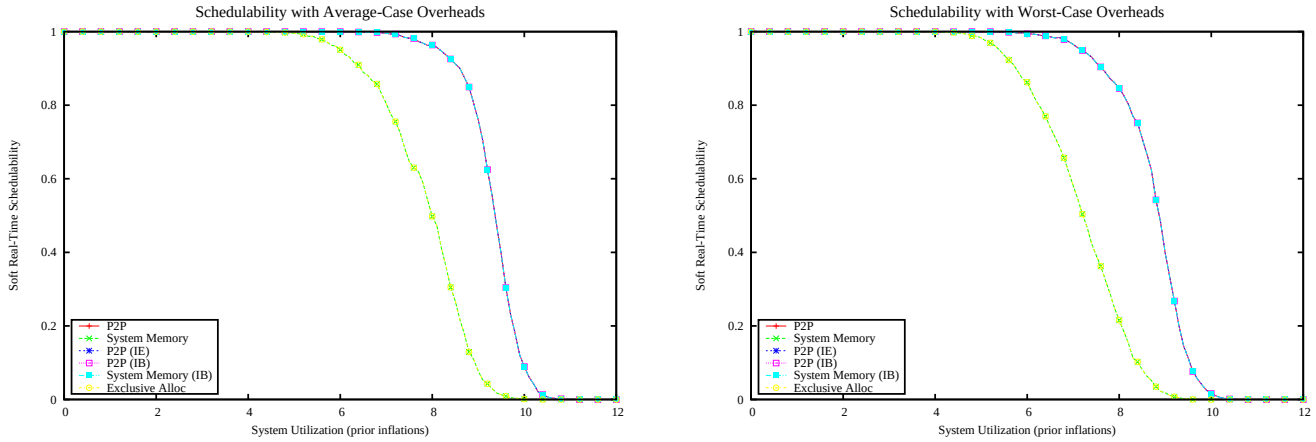

Figure 3150: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

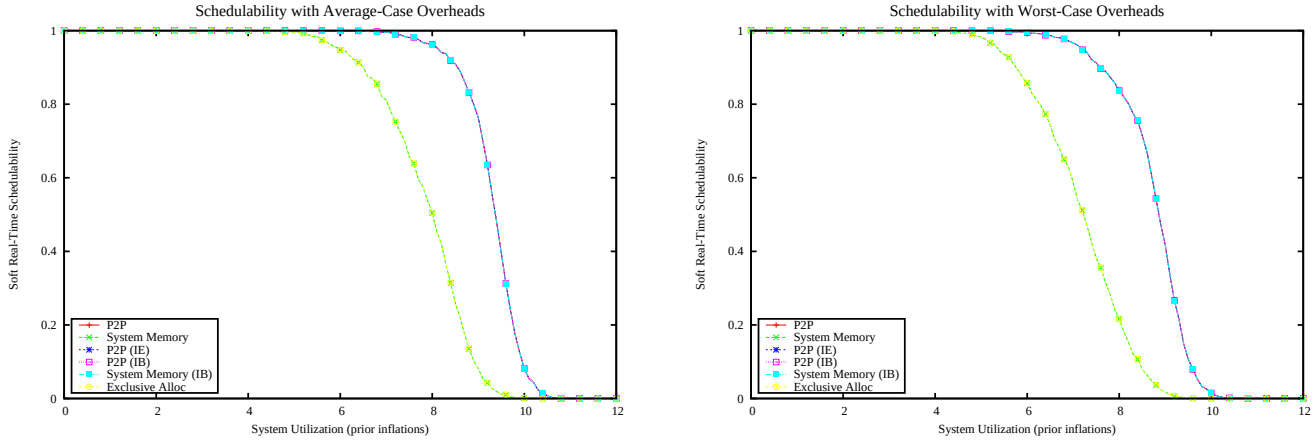

Figure 3151: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

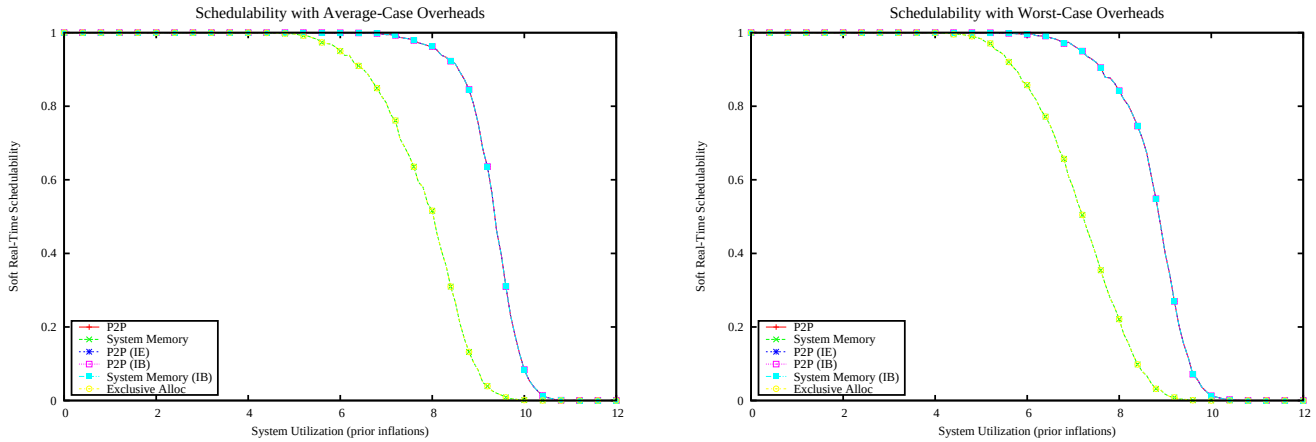

Figure 3152: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

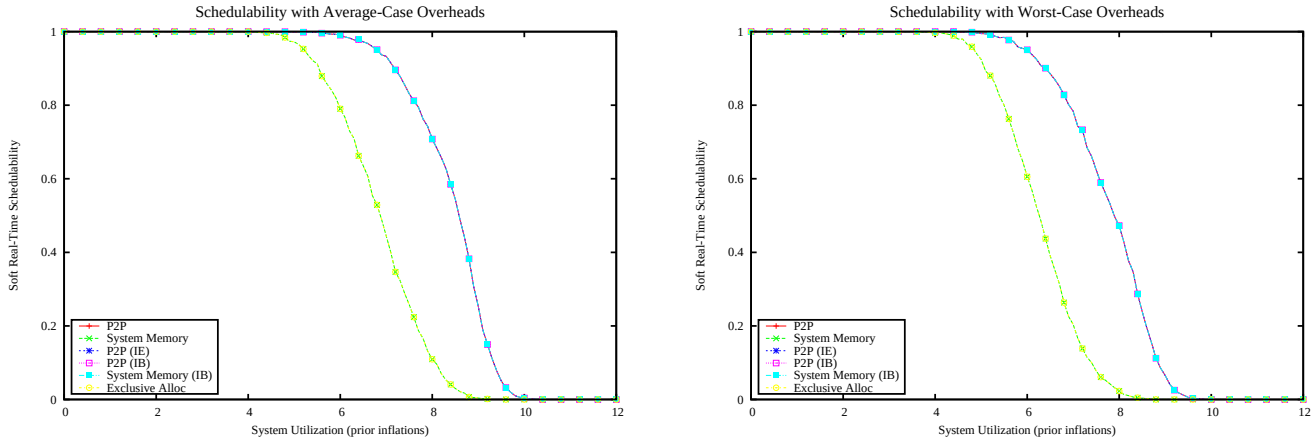

Figure 3153: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

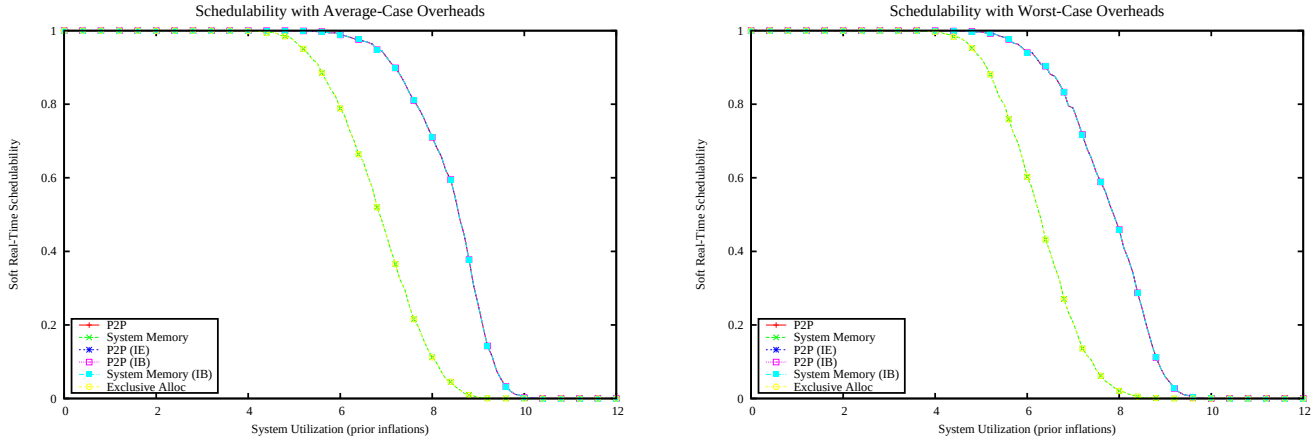

Figure 3154: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

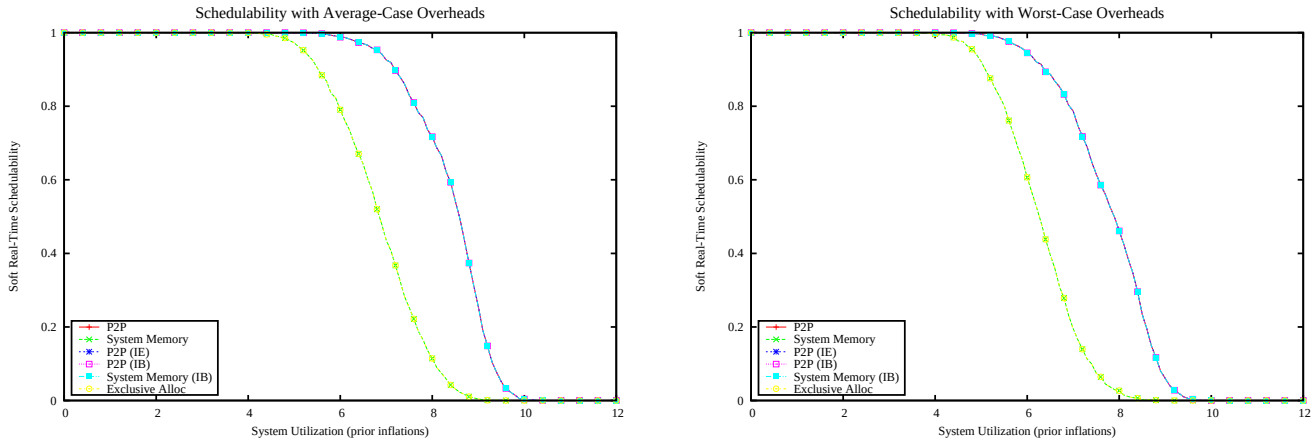

Figure 3155: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

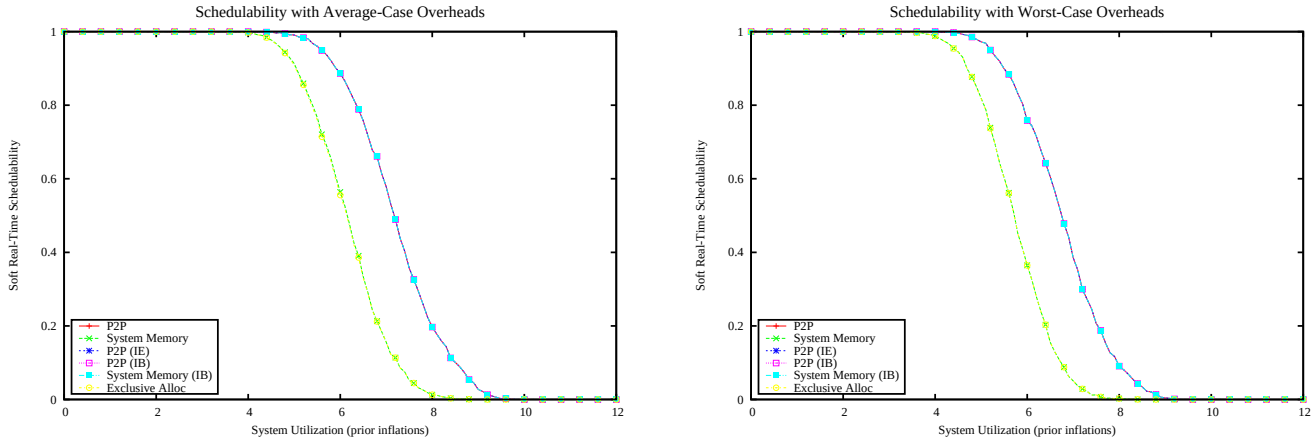

Figure 3156: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

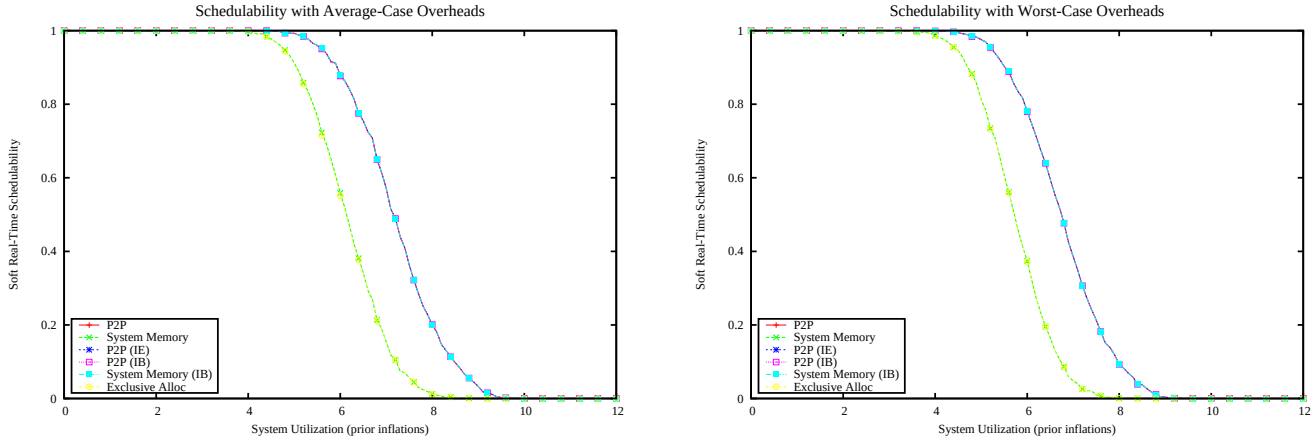

Figure 3157: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

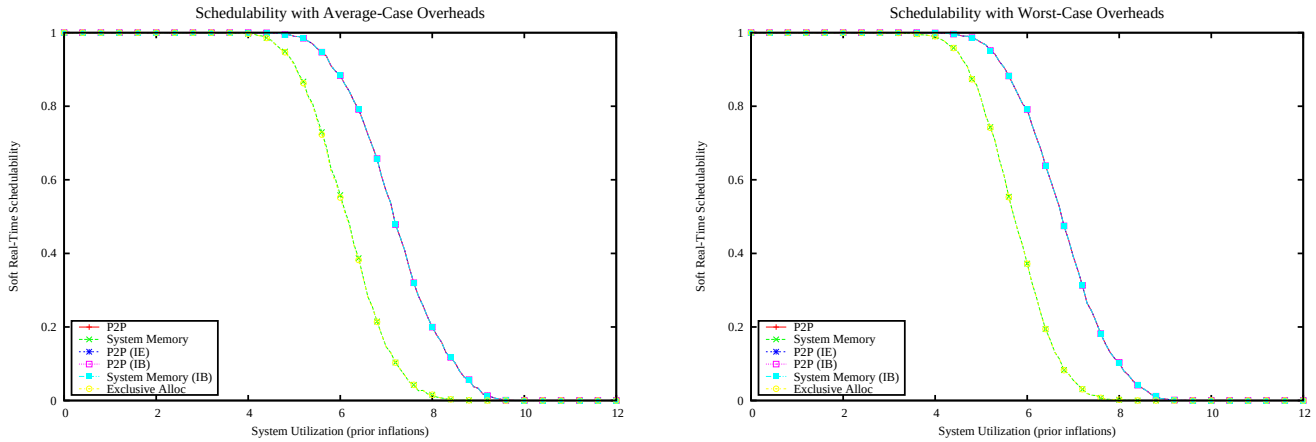

Figure 3158: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

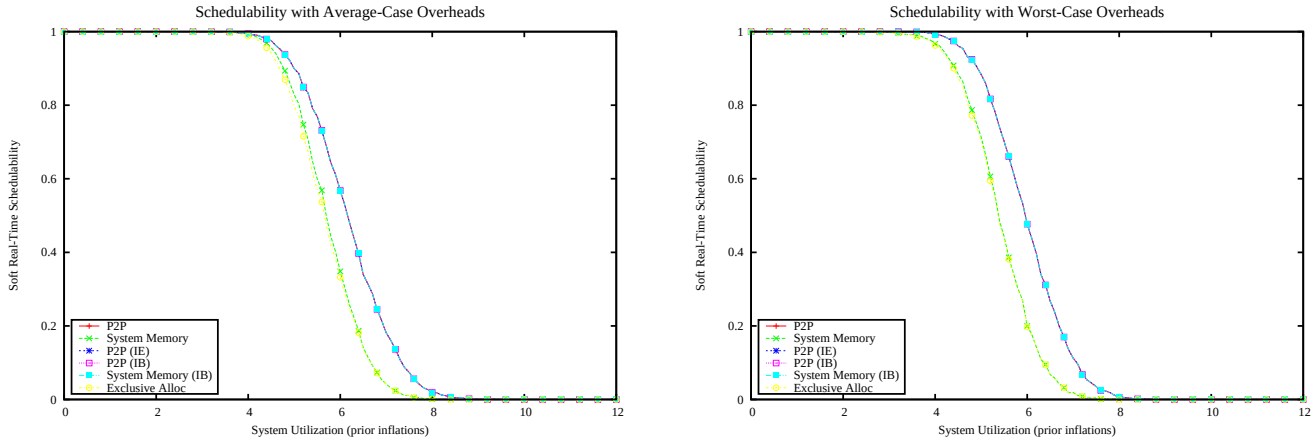

Figure 3159: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

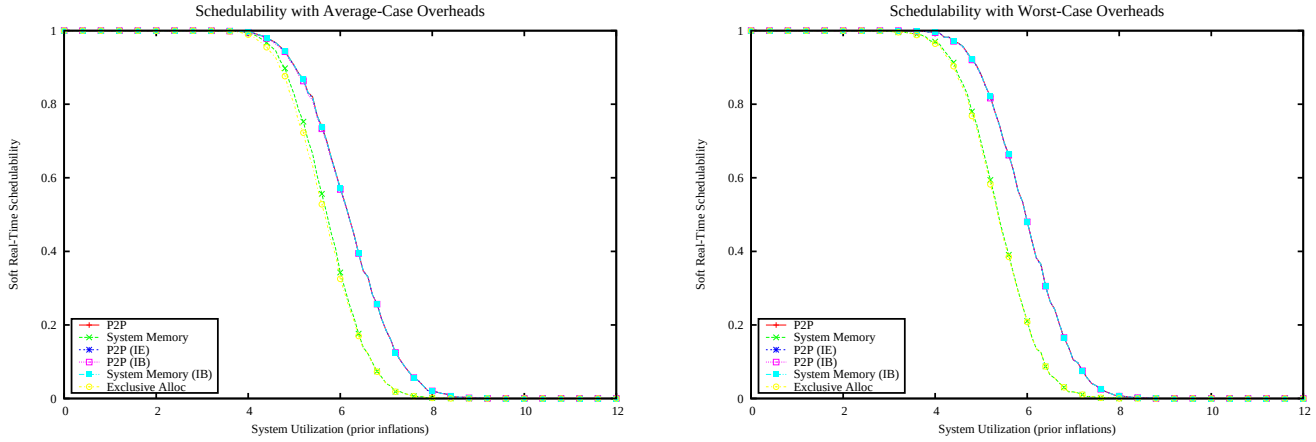

Figure 3160: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

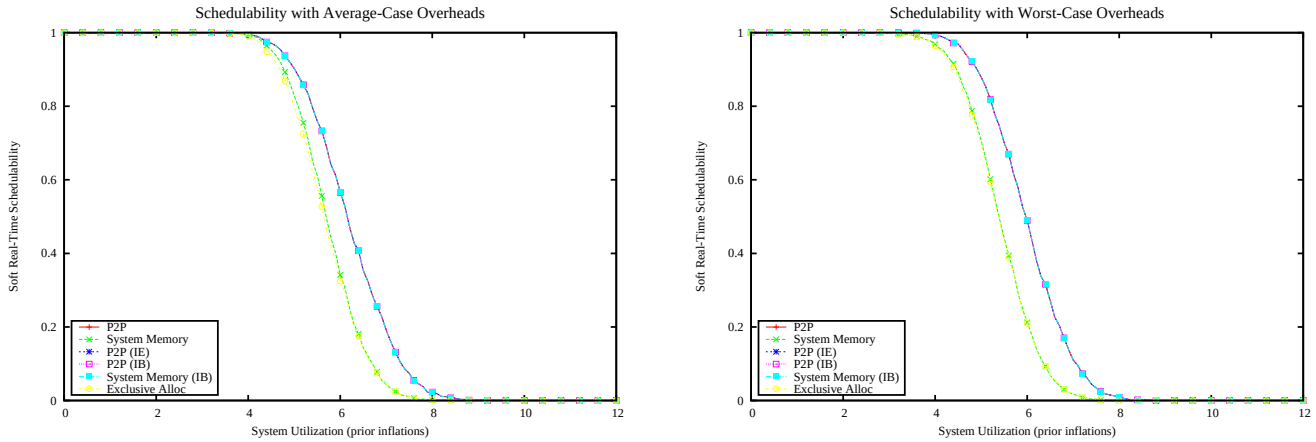

Figure 3161: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

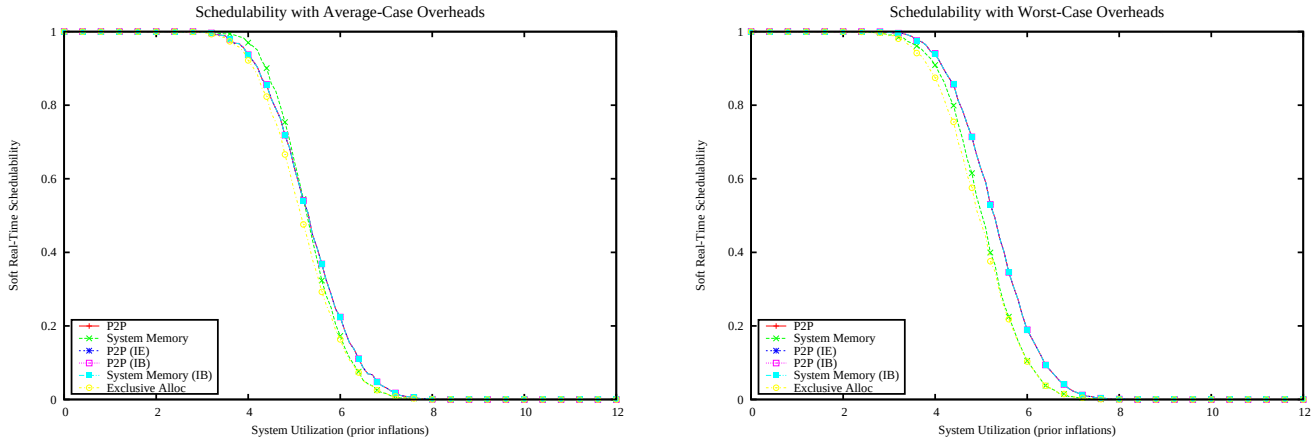

Figure 3162: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

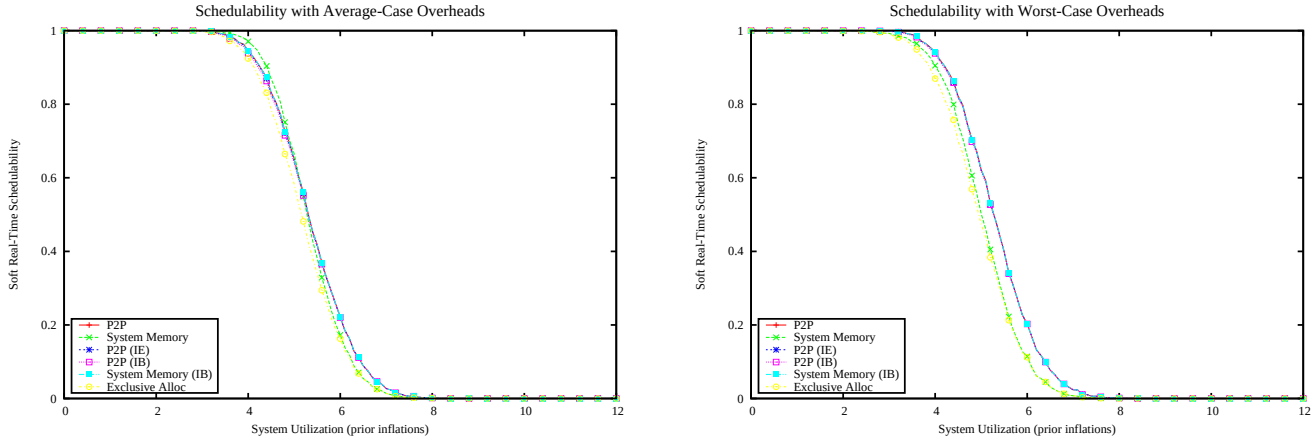

Figure 3163: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

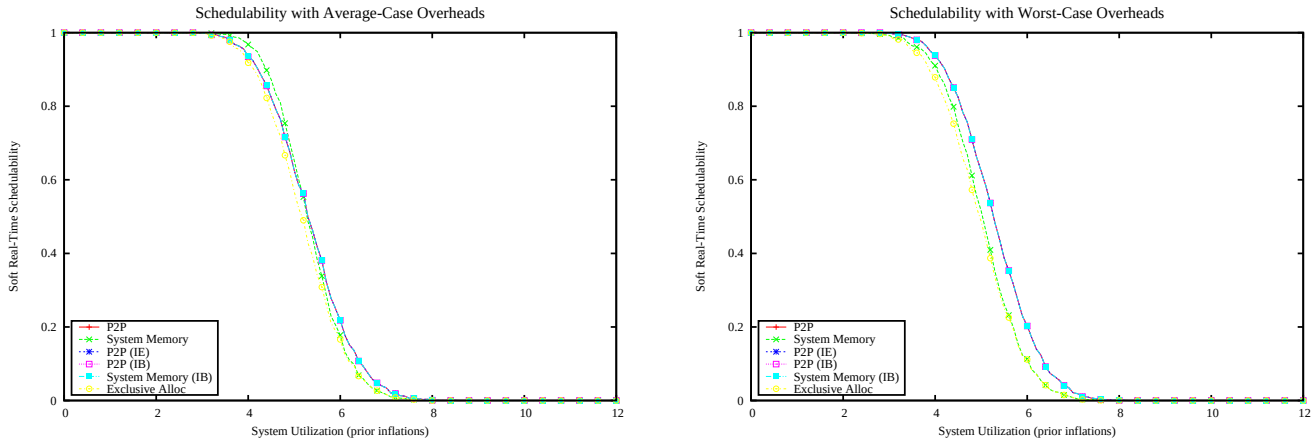

Figure 3164: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

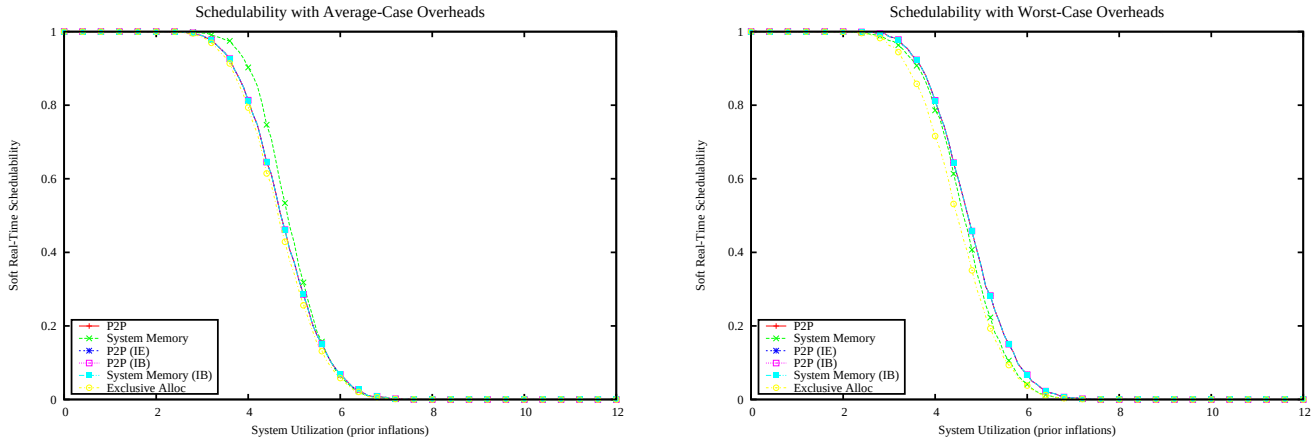

Figure 3165: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

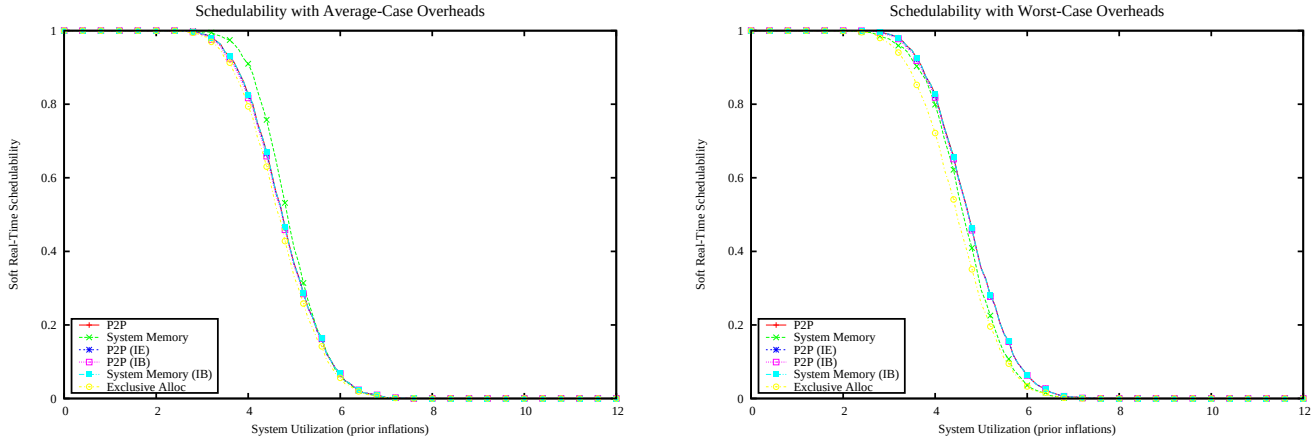

Figure 3166: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

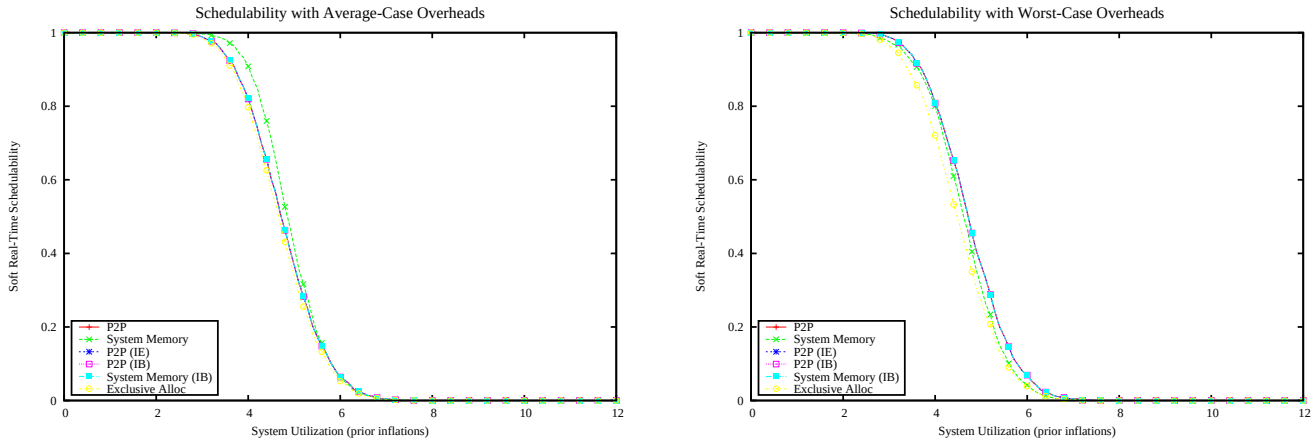

Figure 3167: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

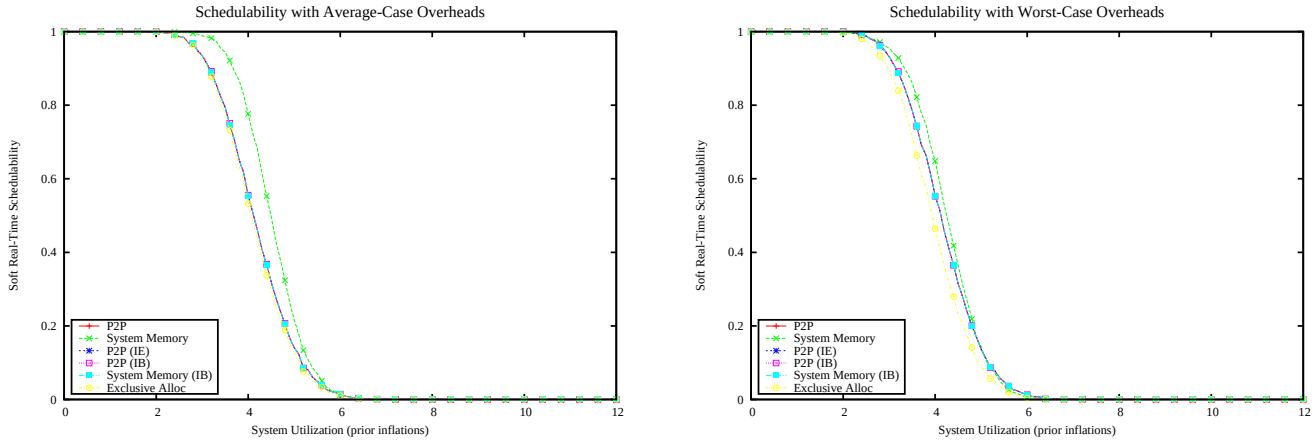

Figure 3168: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

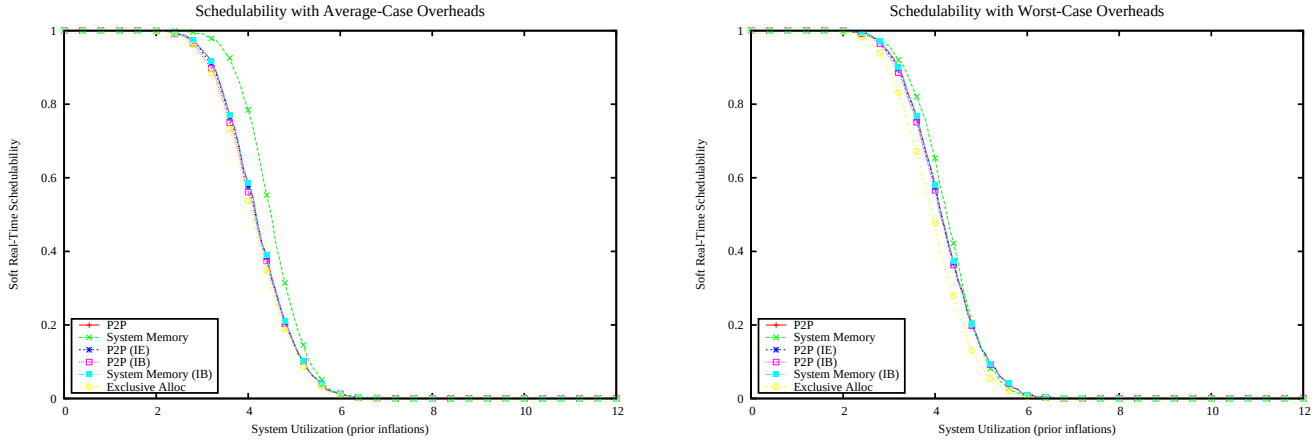

Figure 3169: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

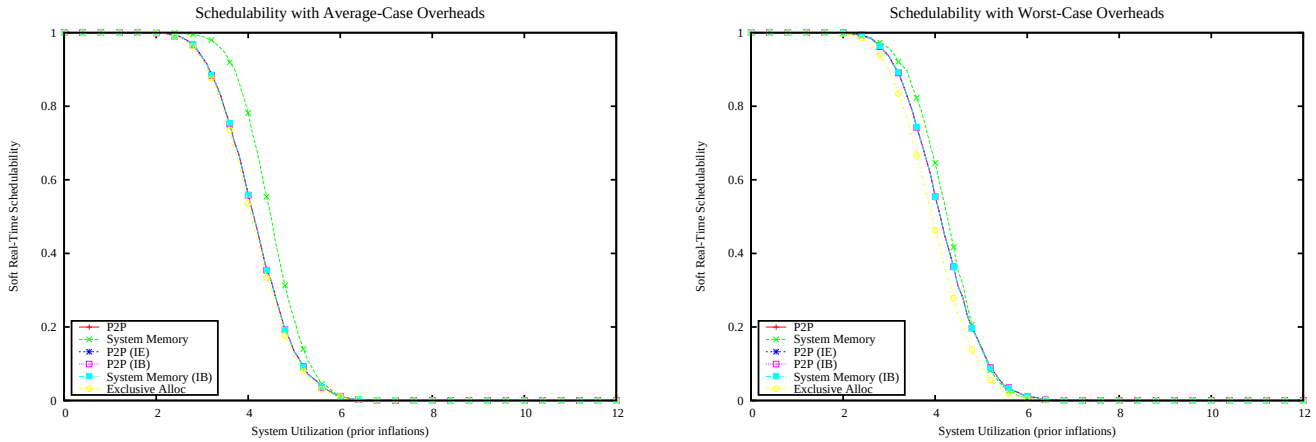

Figure 3170: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

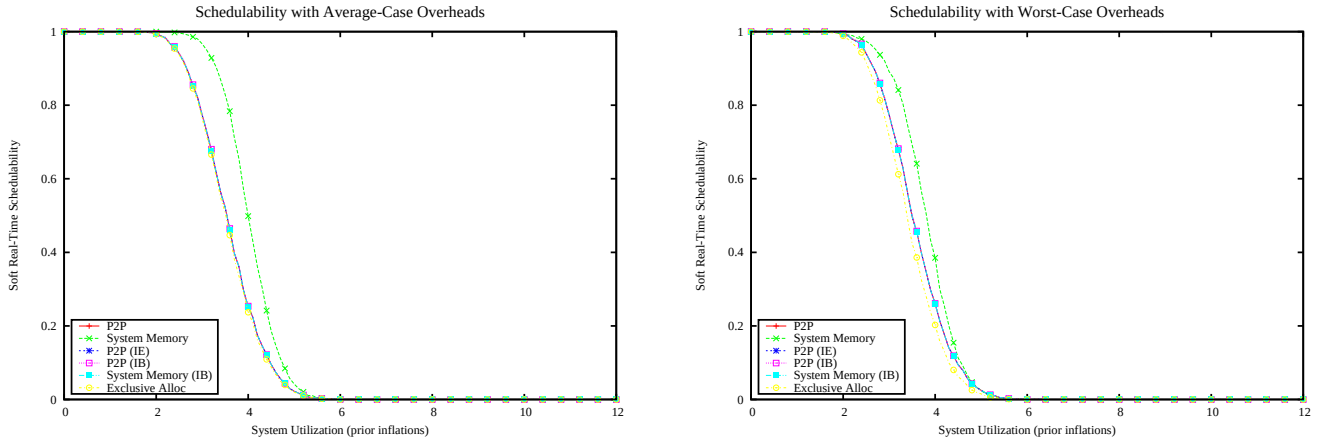

Figure 3171: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

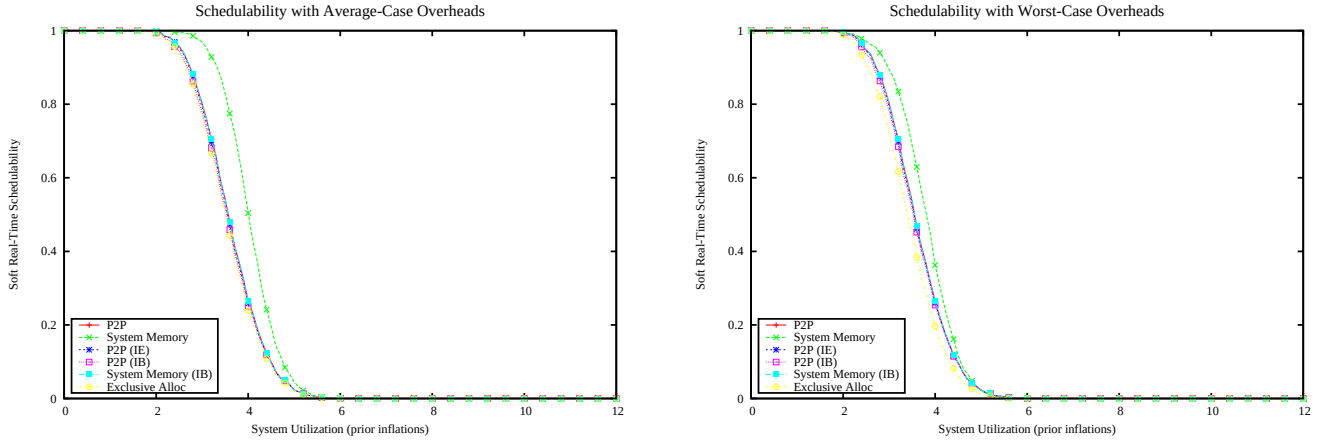

Figure 3172: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

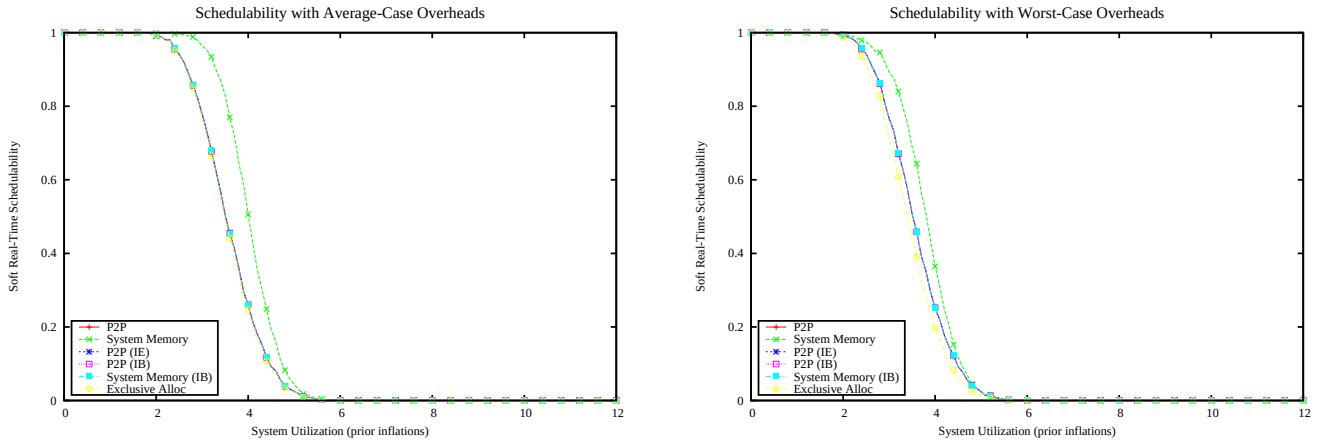

Figure 3173: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

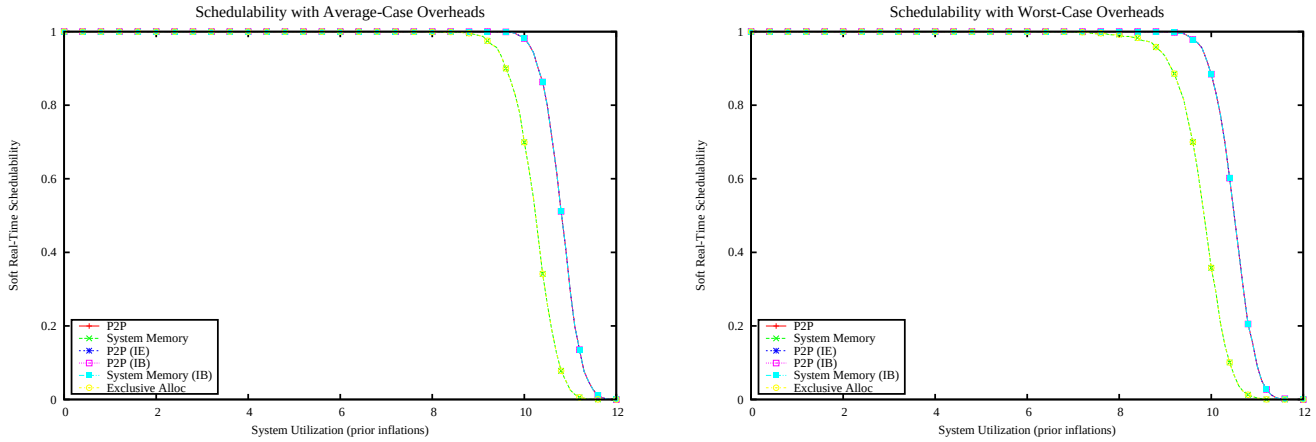

Figure 3174: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

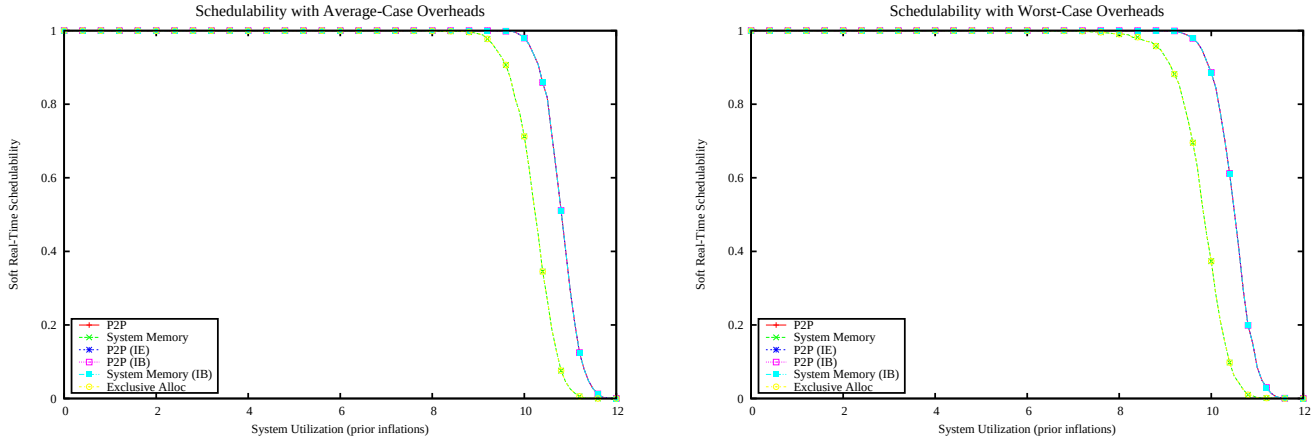

Figure 3175: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

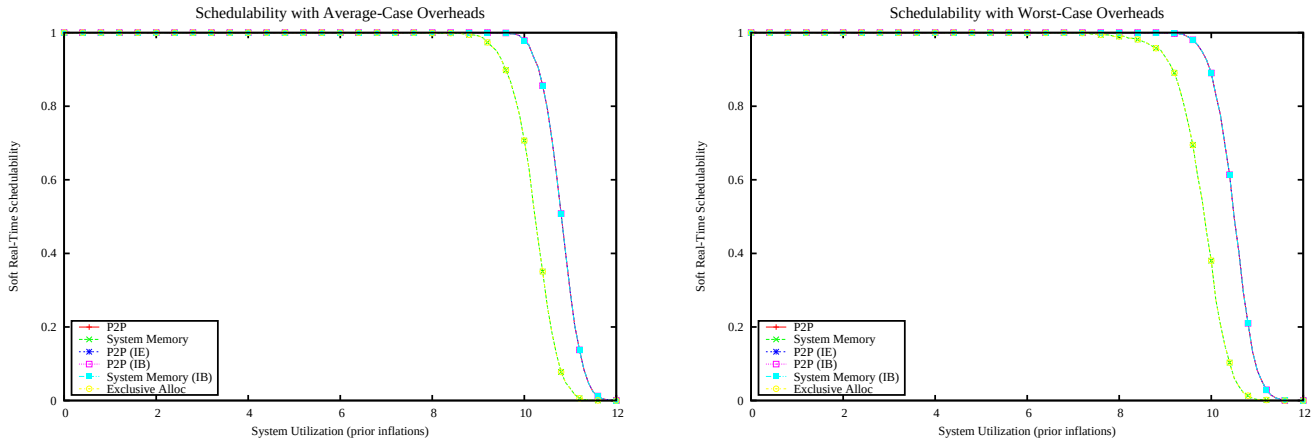

Figure 3176: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

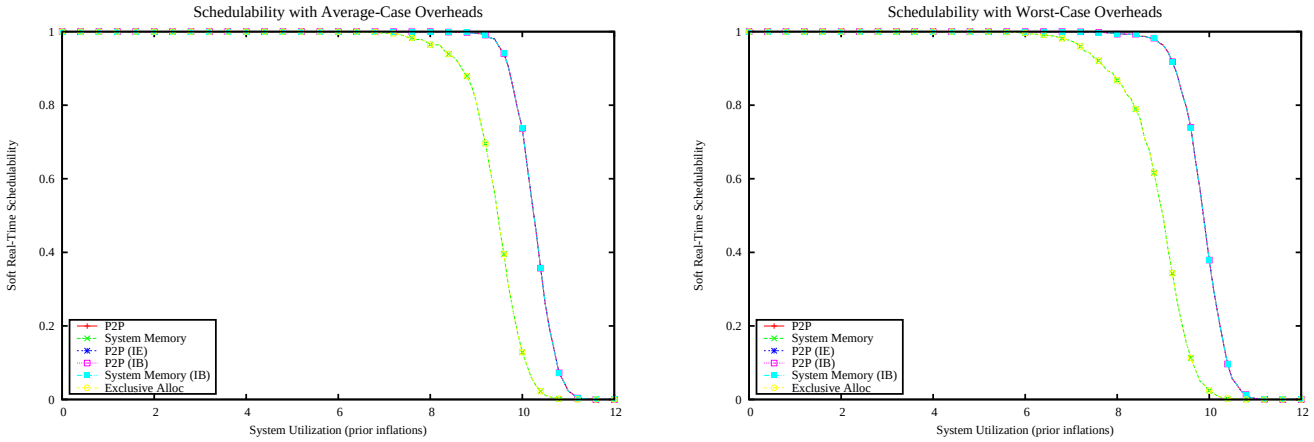

Figure 3177: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

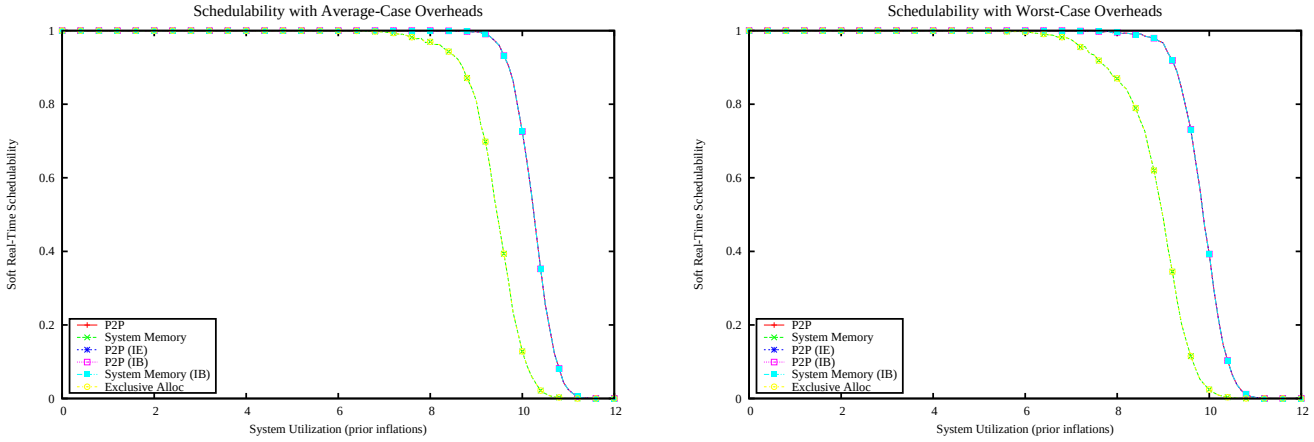

Figure 3178: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

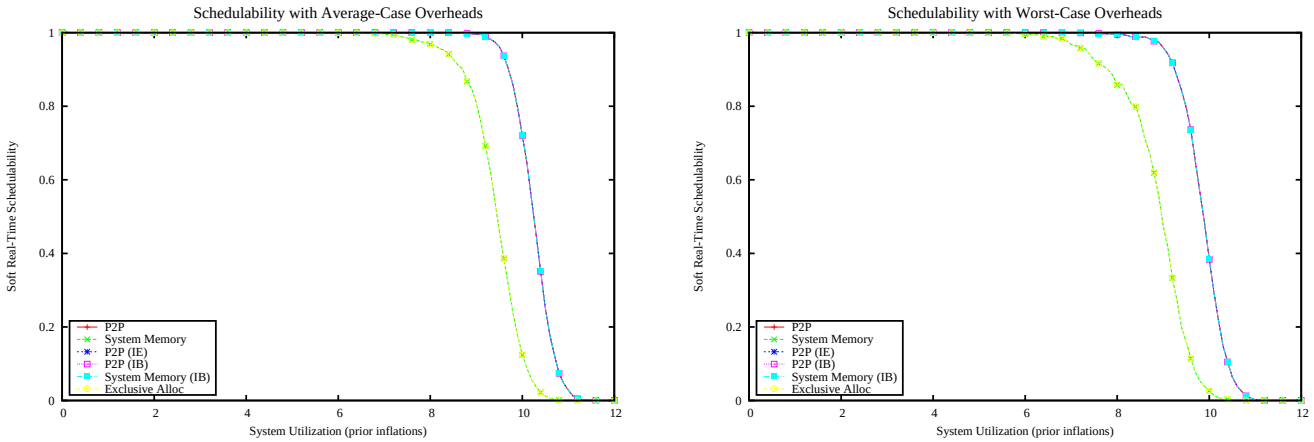

Figure 3179: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

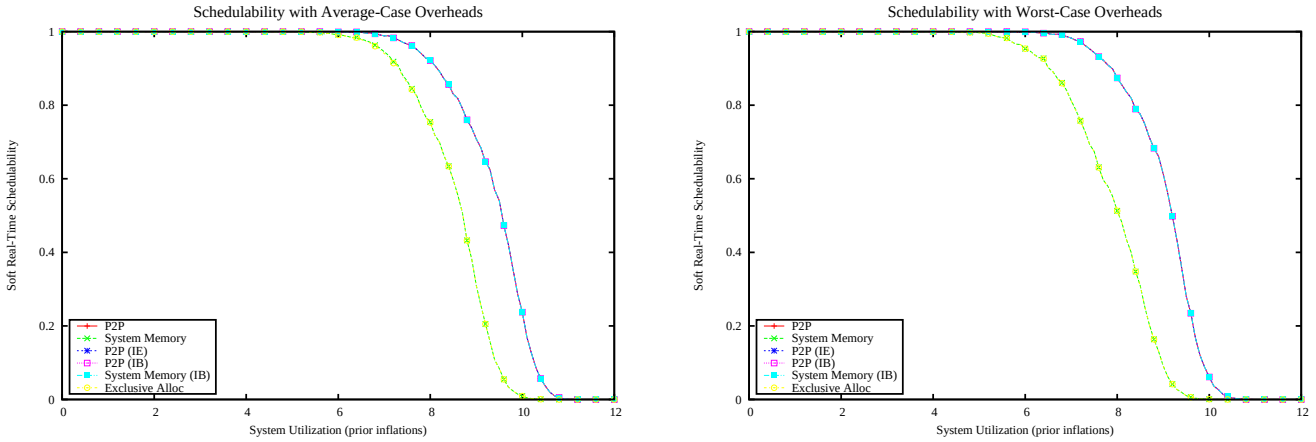

Figure 3180: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

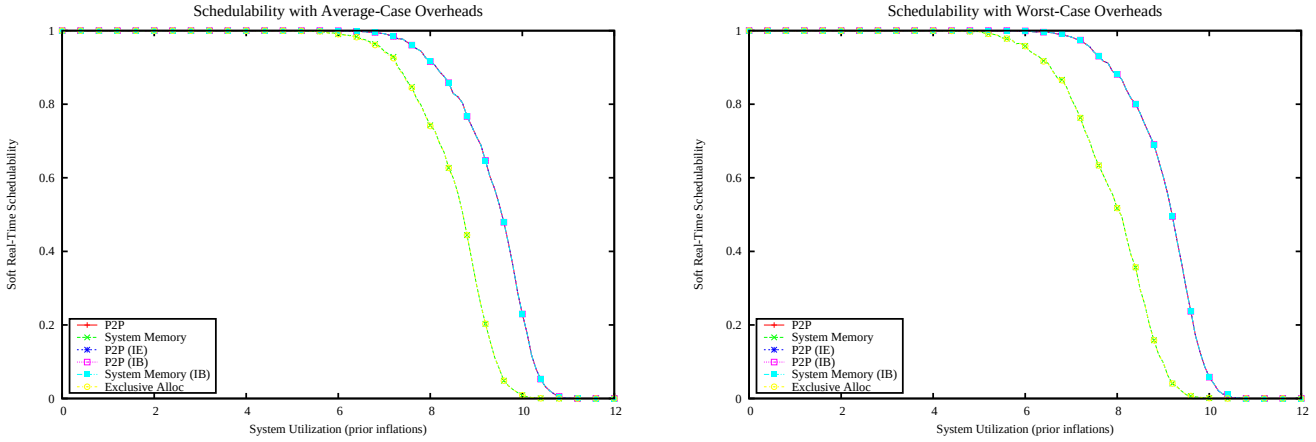

Figure 3181: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

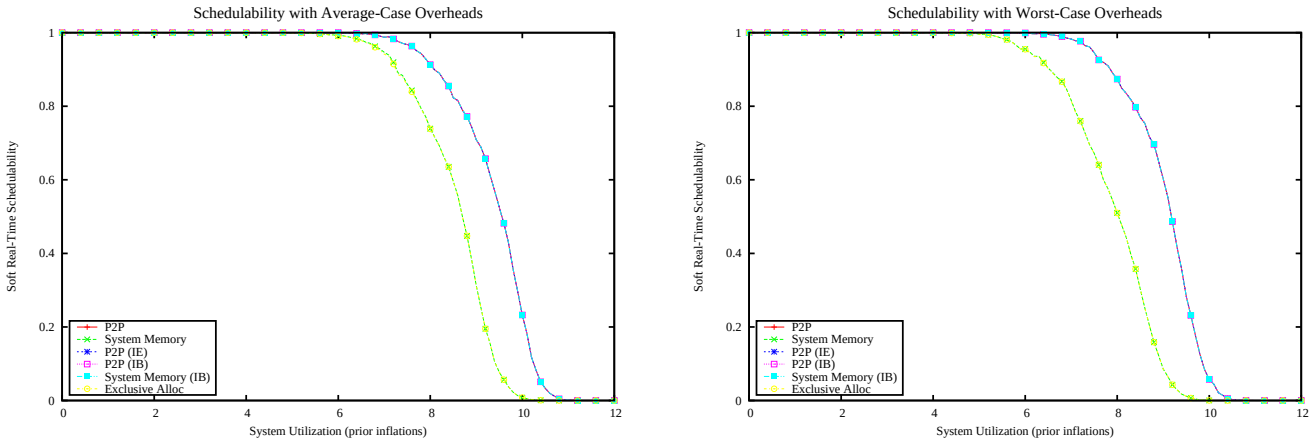

Figure 3182: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

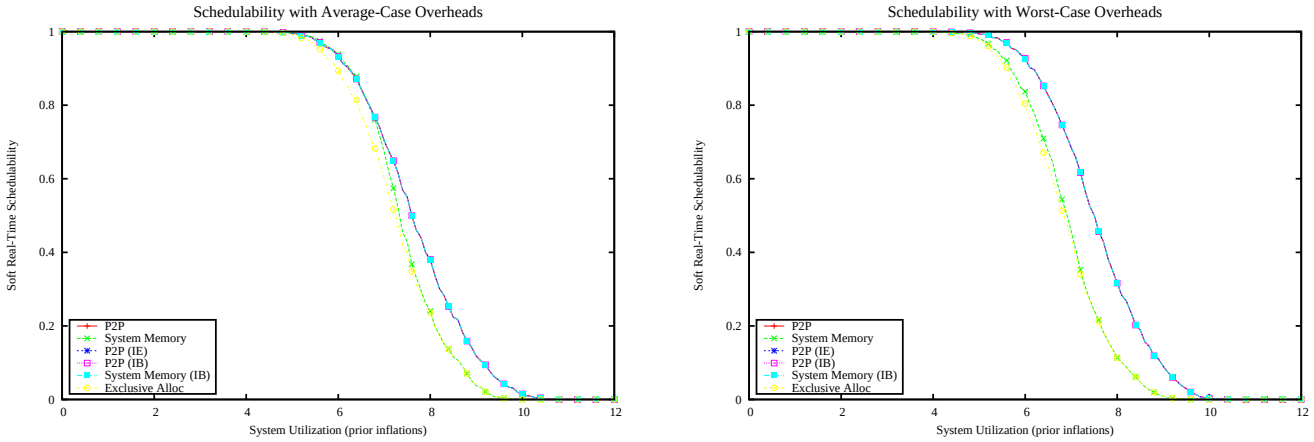

Figure 3183: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

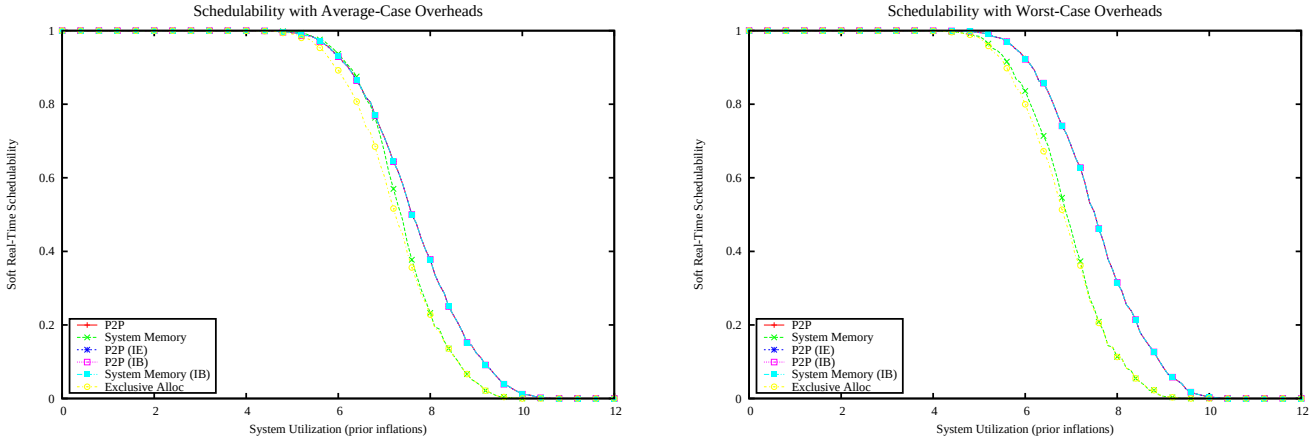

Figure 3184: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

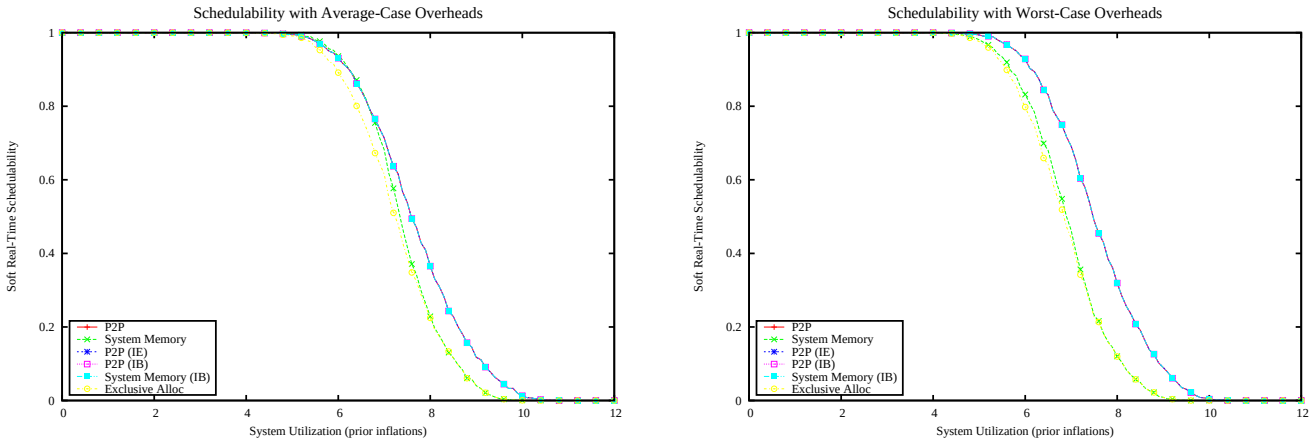

Figure 3185: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

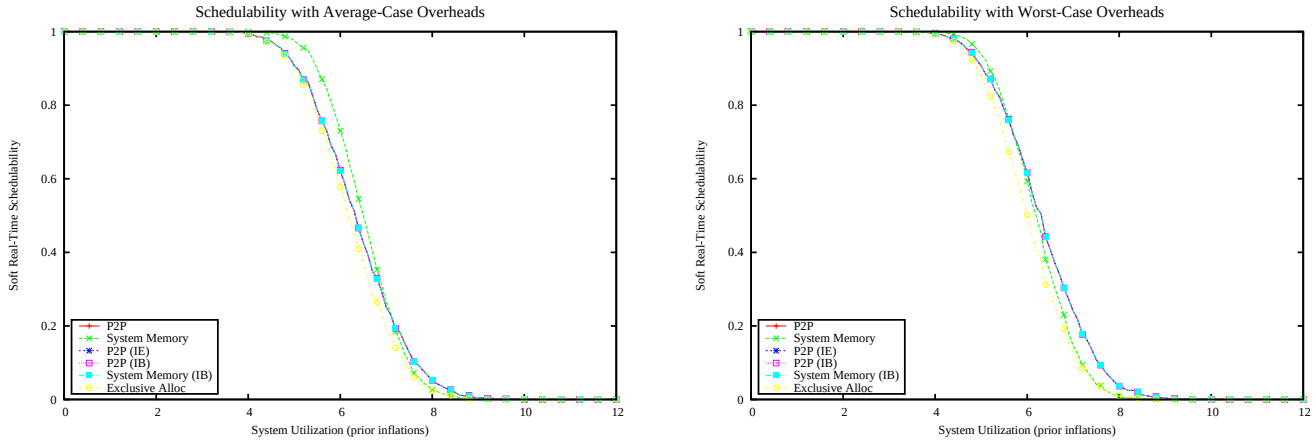

Figure 3186: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

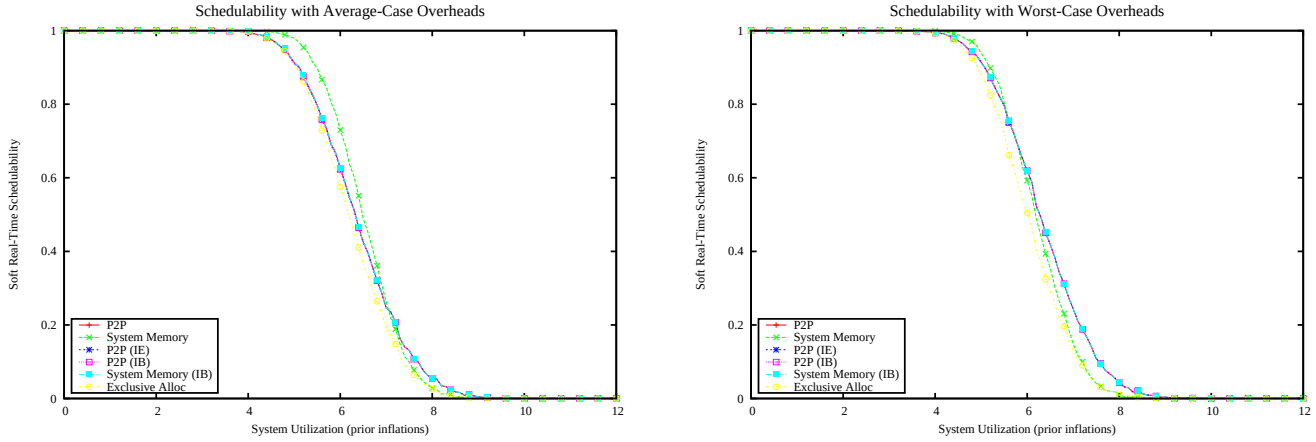

Figure 3187: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

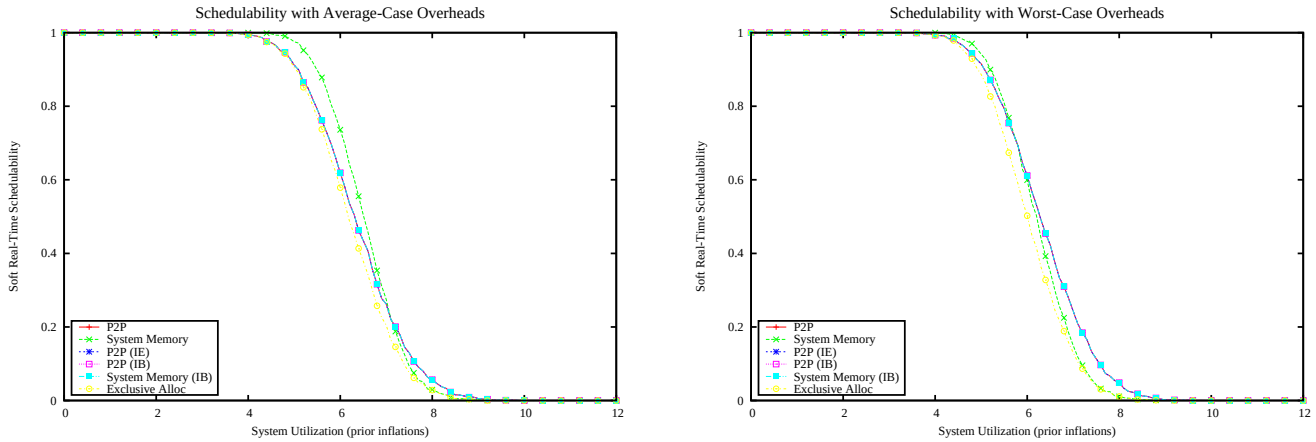

Figure 3188: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

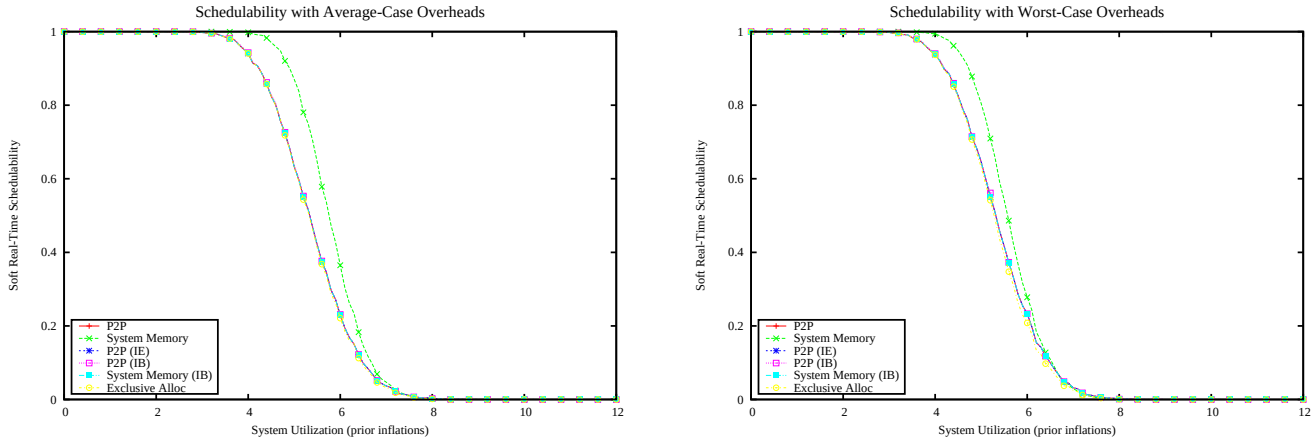

Figure 3189: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

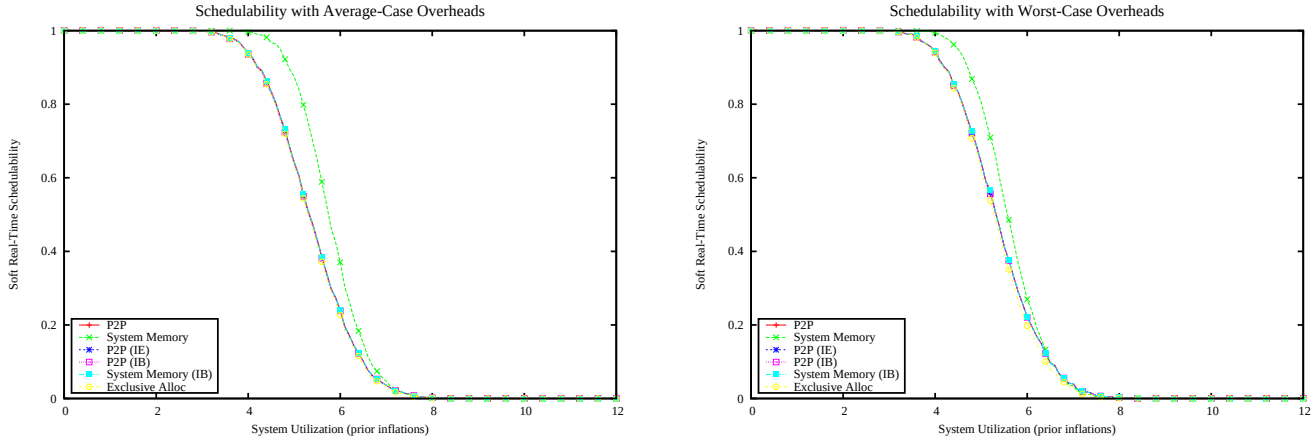

Figure 3190: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

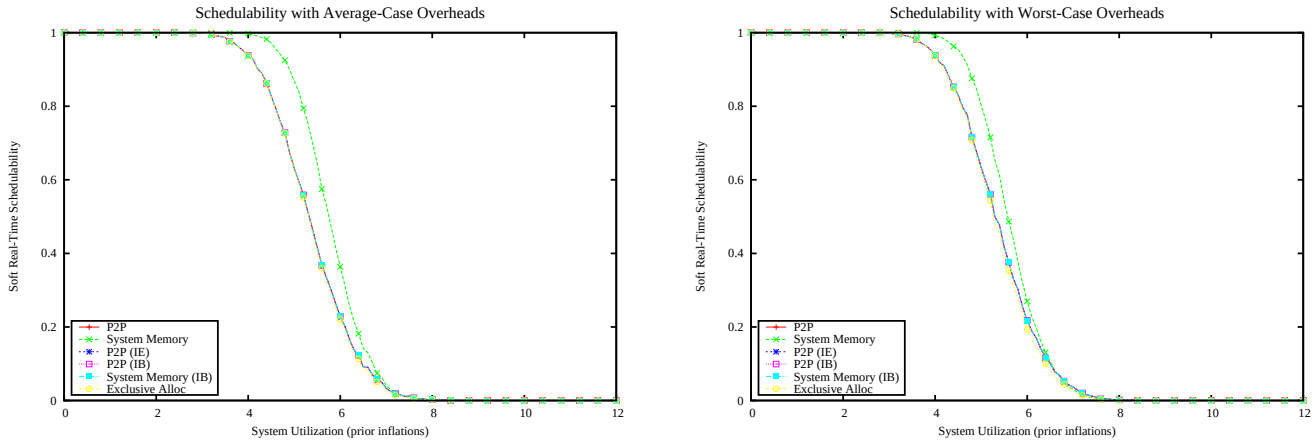

Figure 3191: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

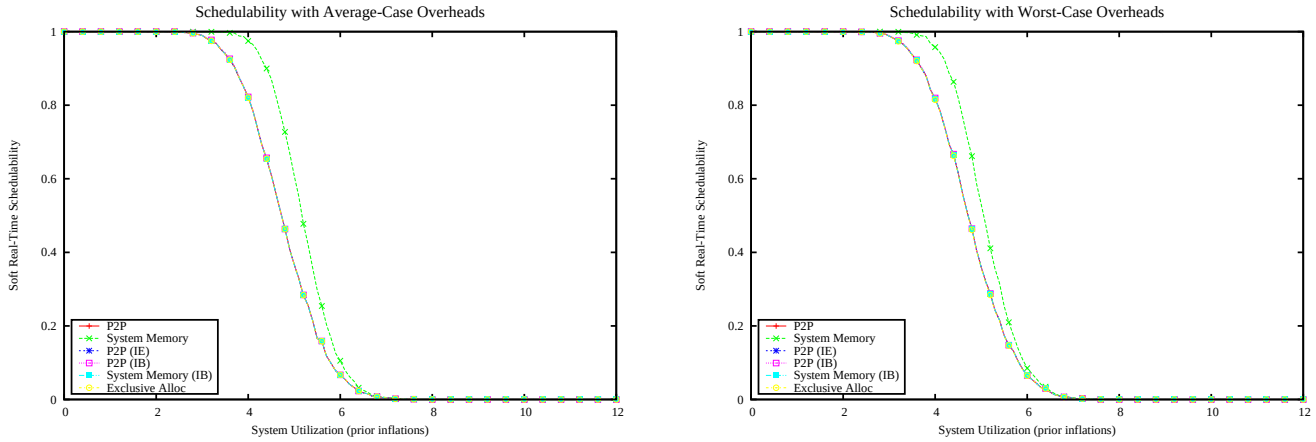

Figure 3192: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

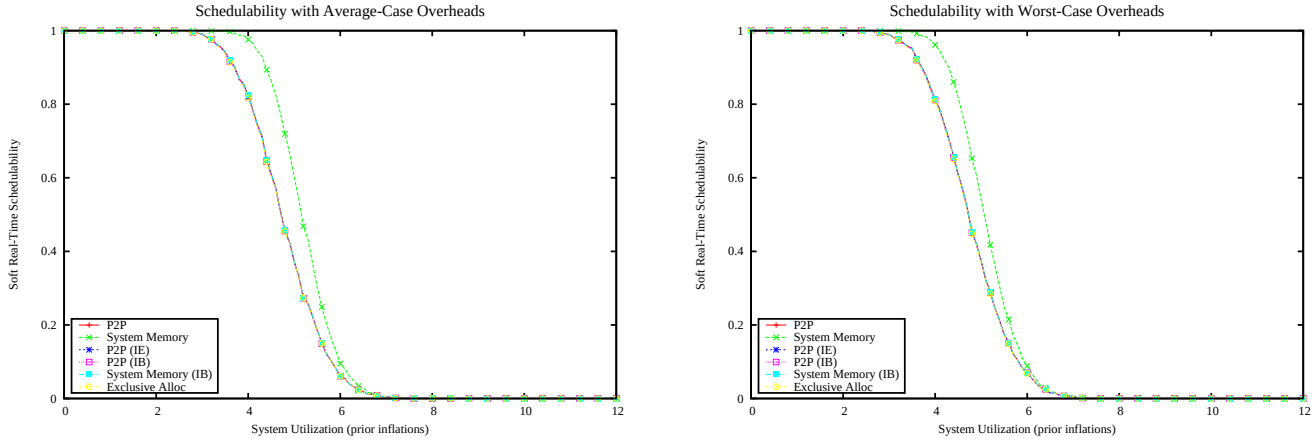

Figure 3193: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

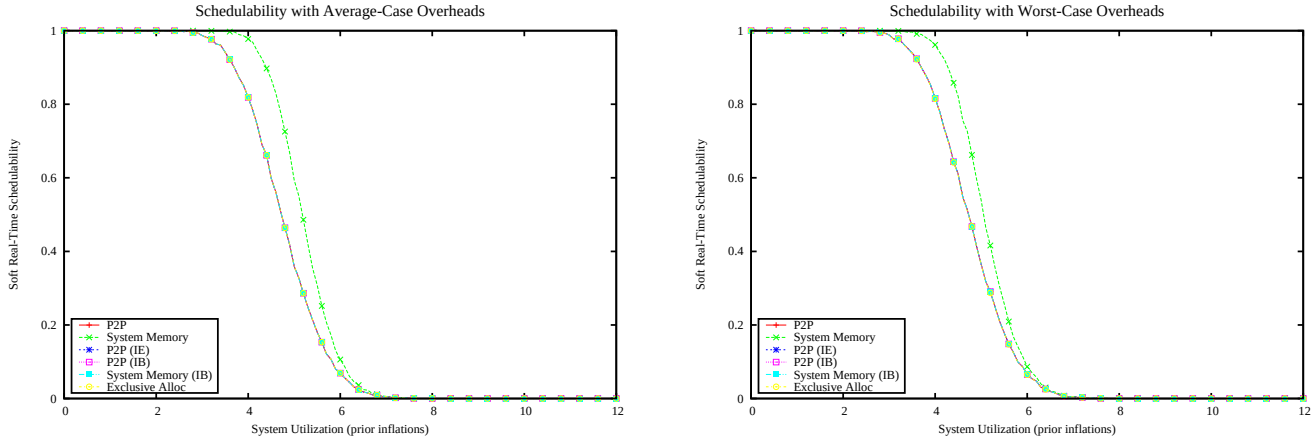

Figure 3194: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

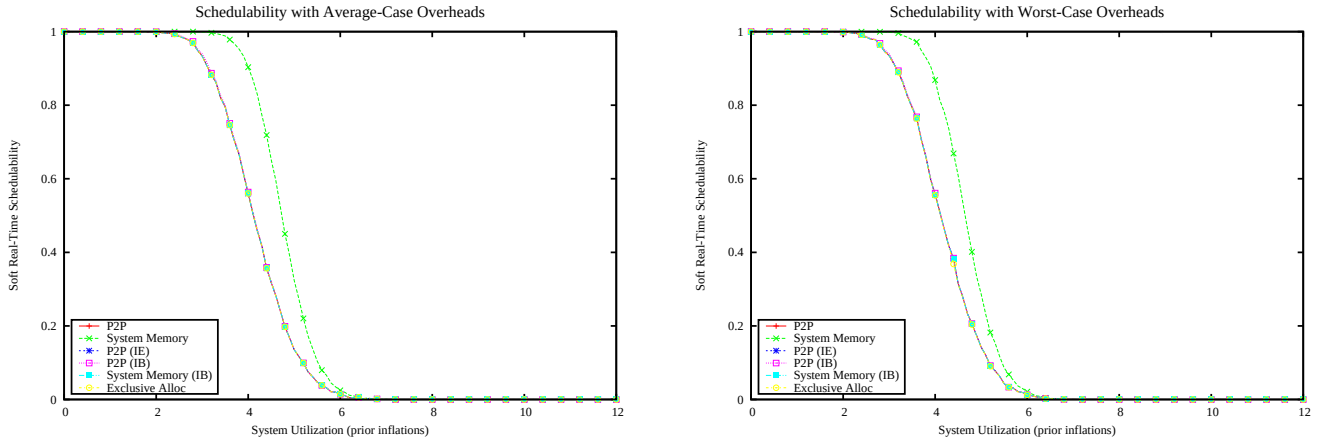

Figure 3195: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

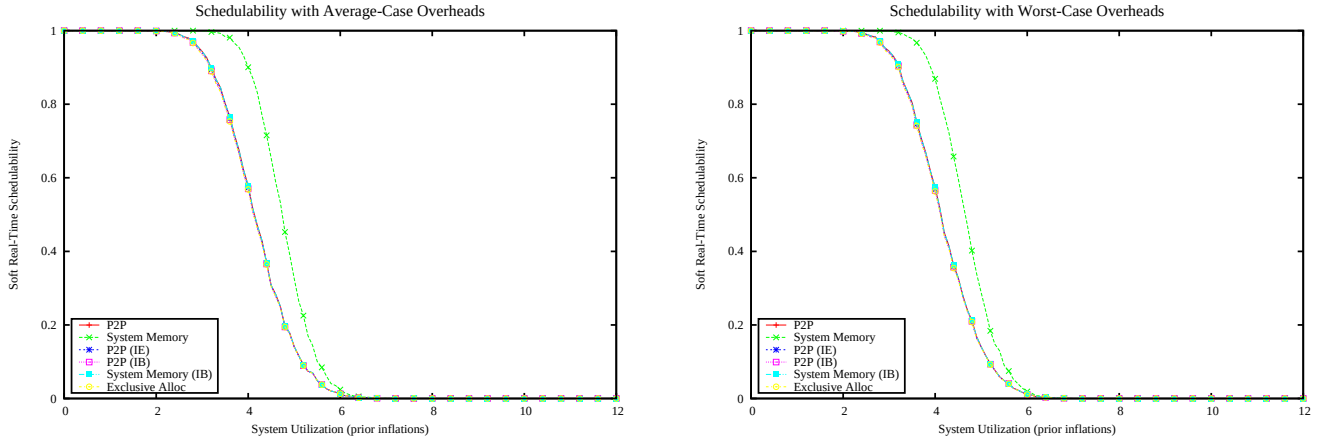

Figure 3196: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

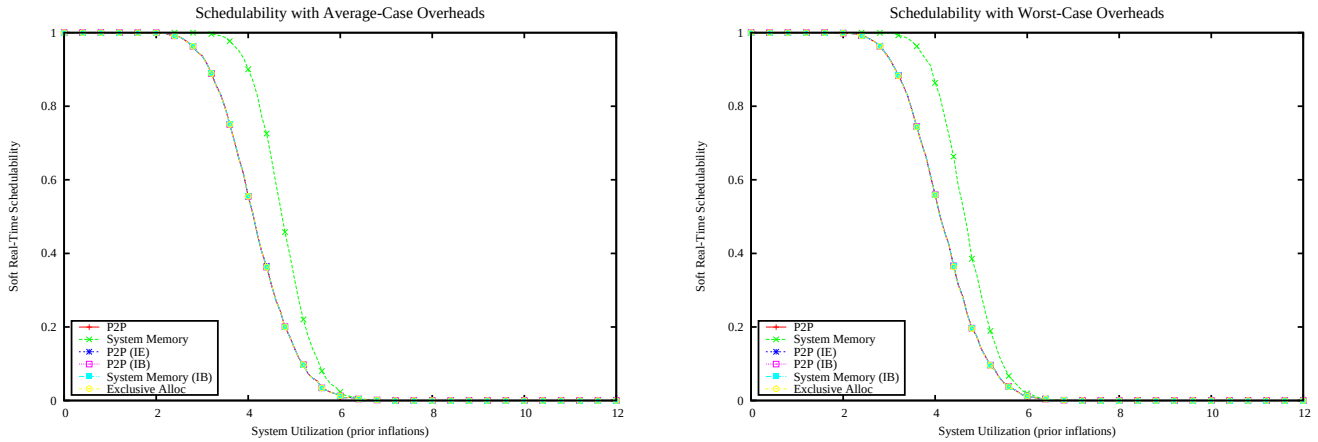

Figure 3197: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

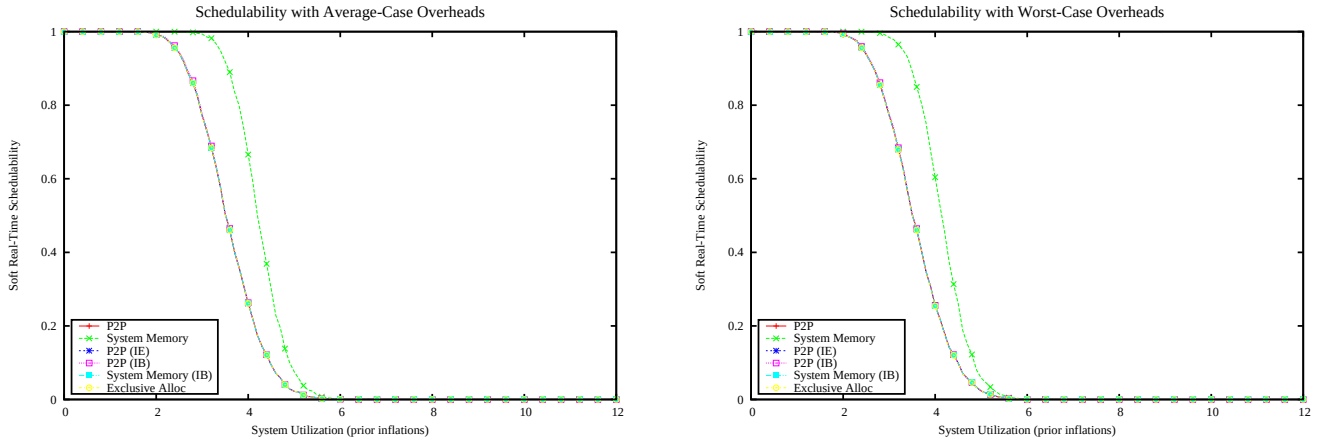

Figure 3198: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

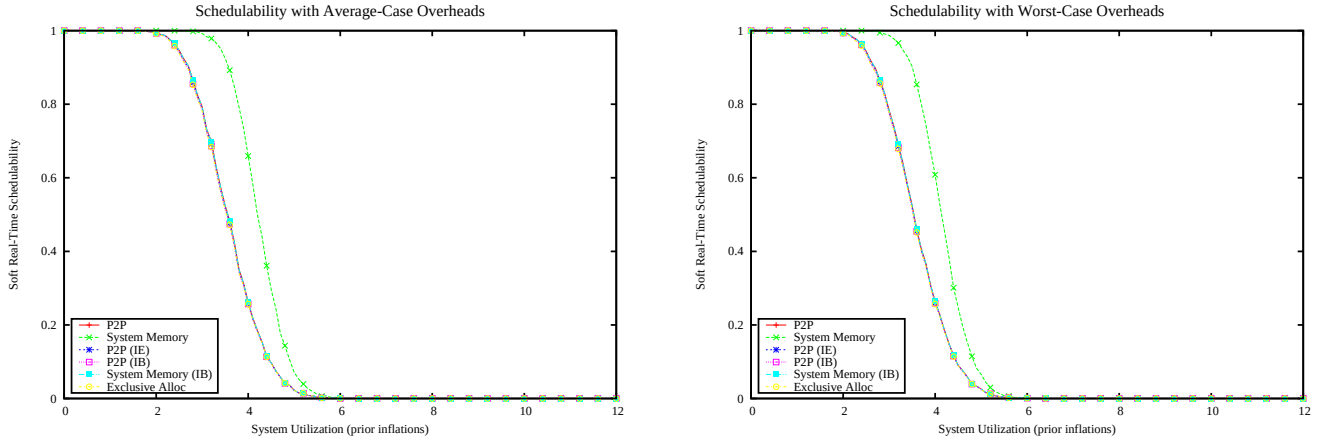

Figure 3199: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

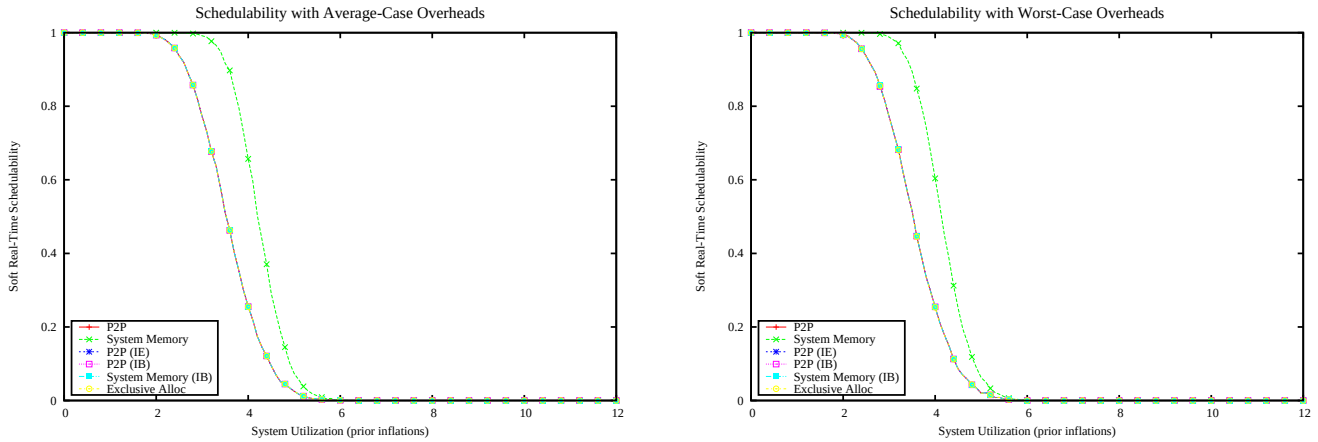

Figure 3200: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

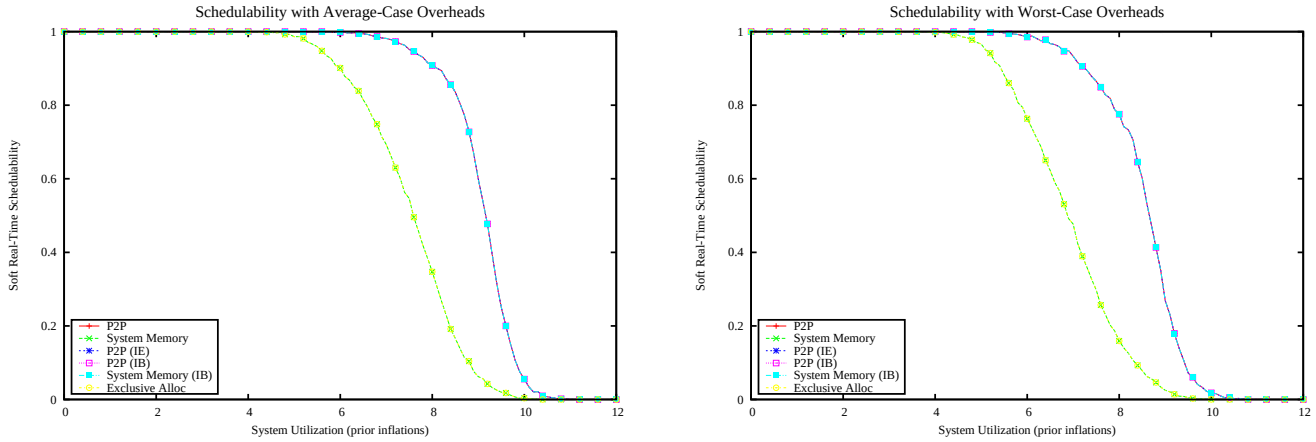

Figure 3201: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

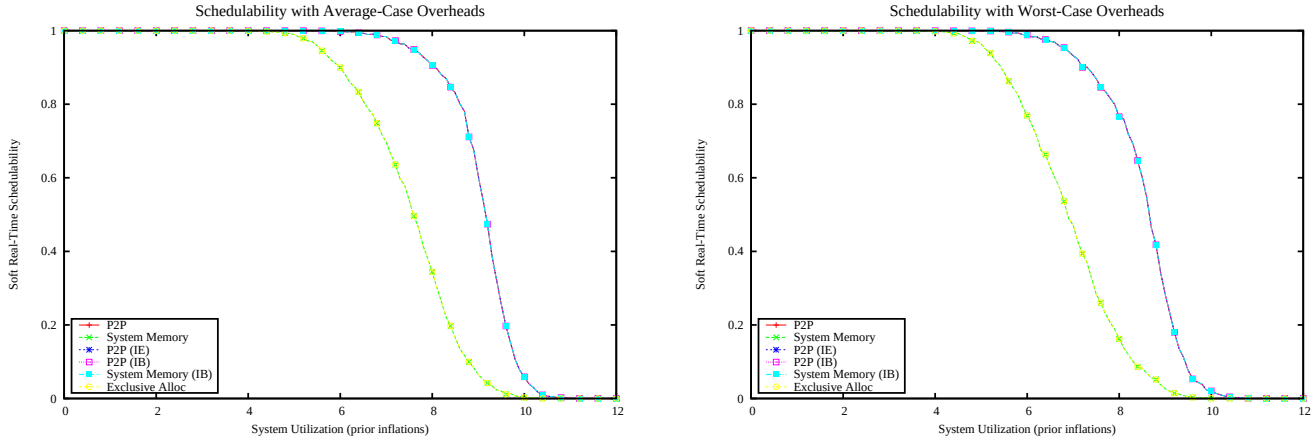

Figure 3202: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

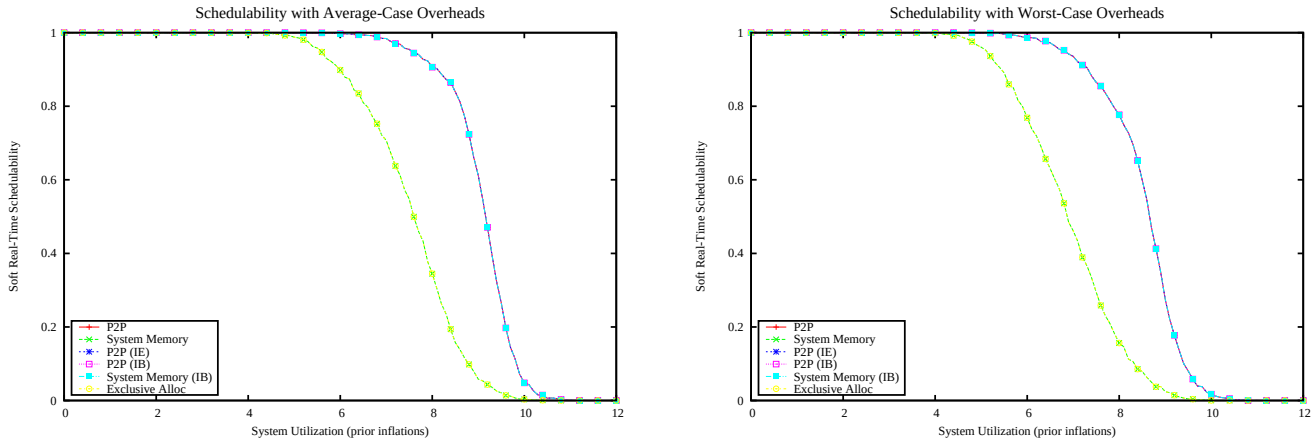

Figure 3203: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

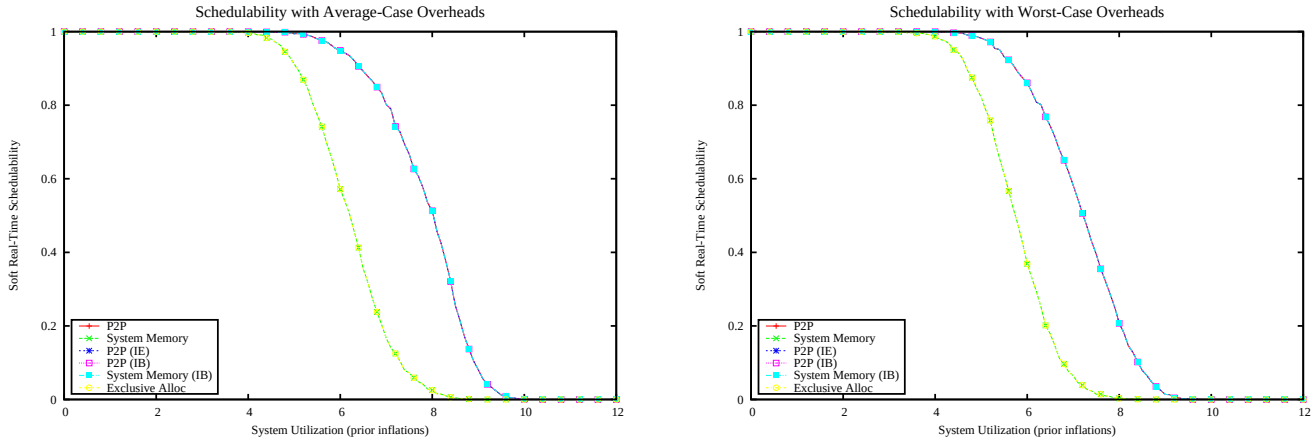

Figure 3204: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

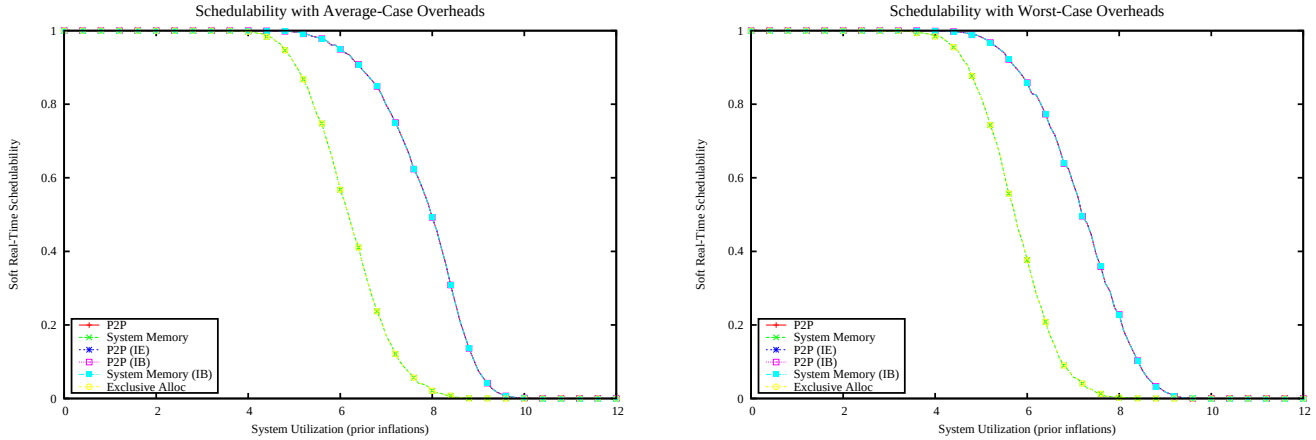

Figure 3205: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

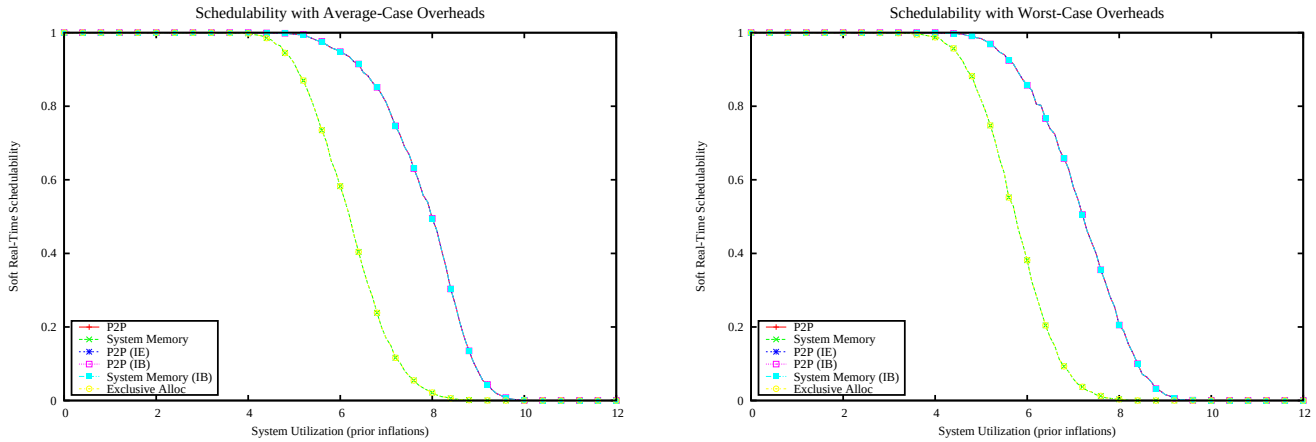

Figure 3206: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

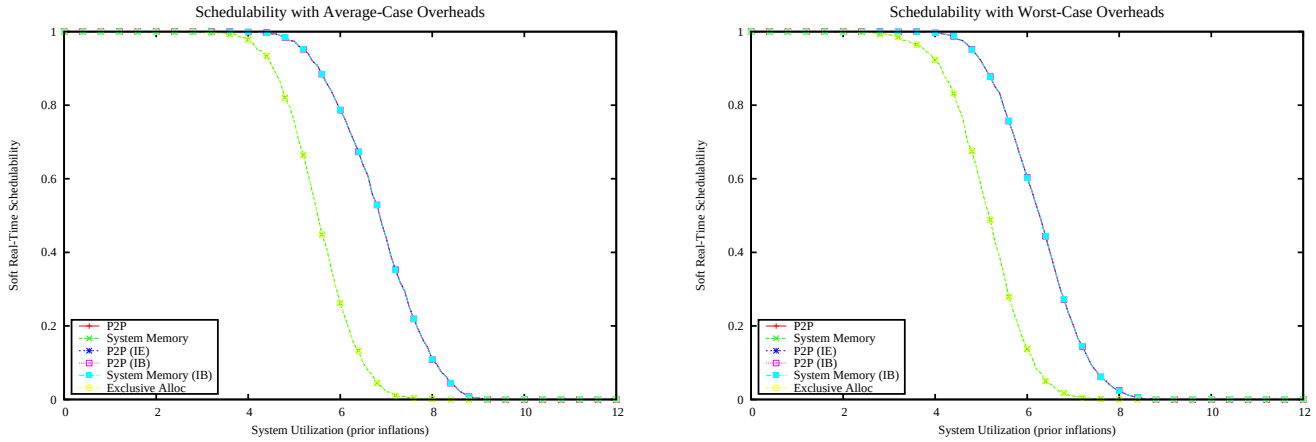

Figure 3207: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

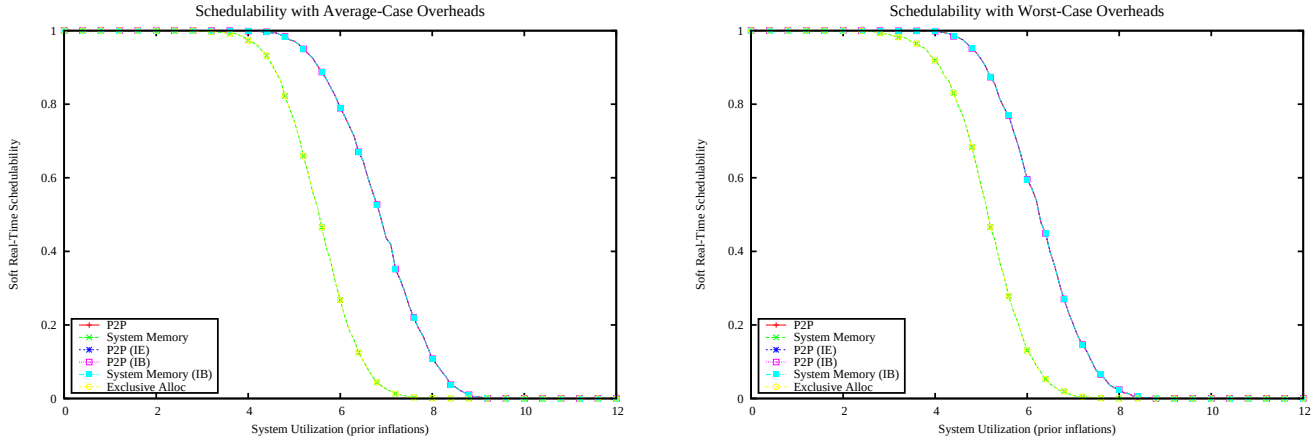

Figure 3208: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

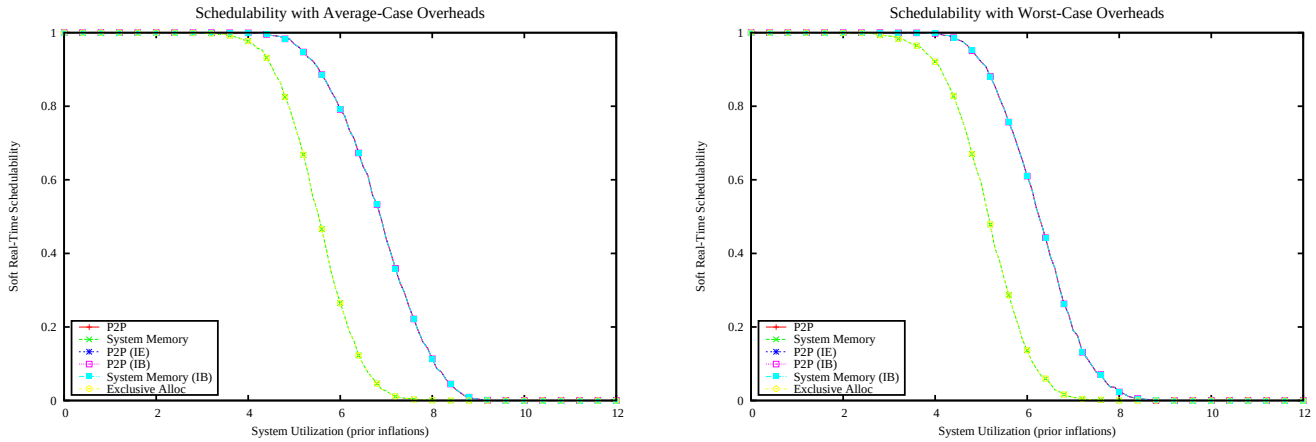

Figure 3209: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

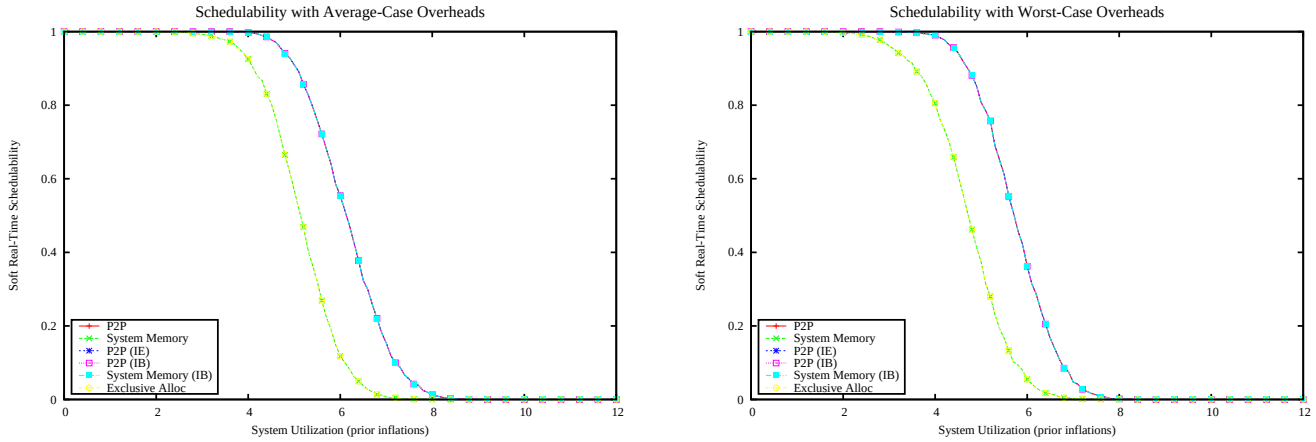

Figure 3210: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

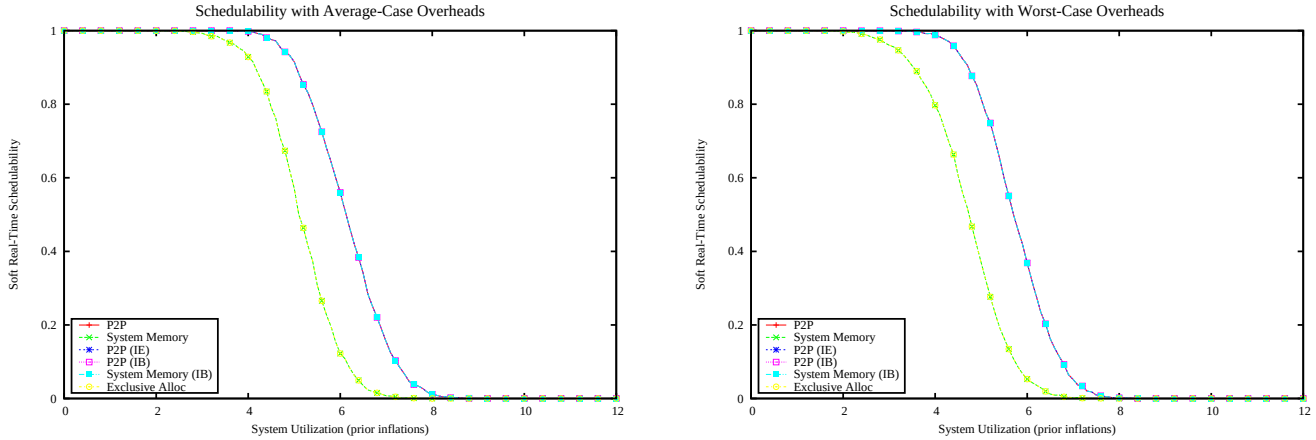

Figure 3211: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

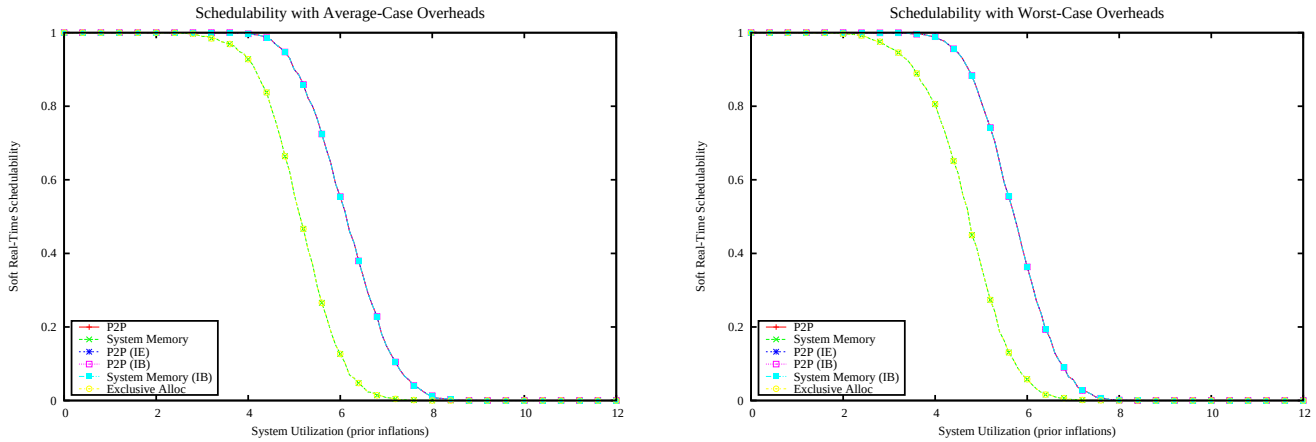

Figure 3212: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

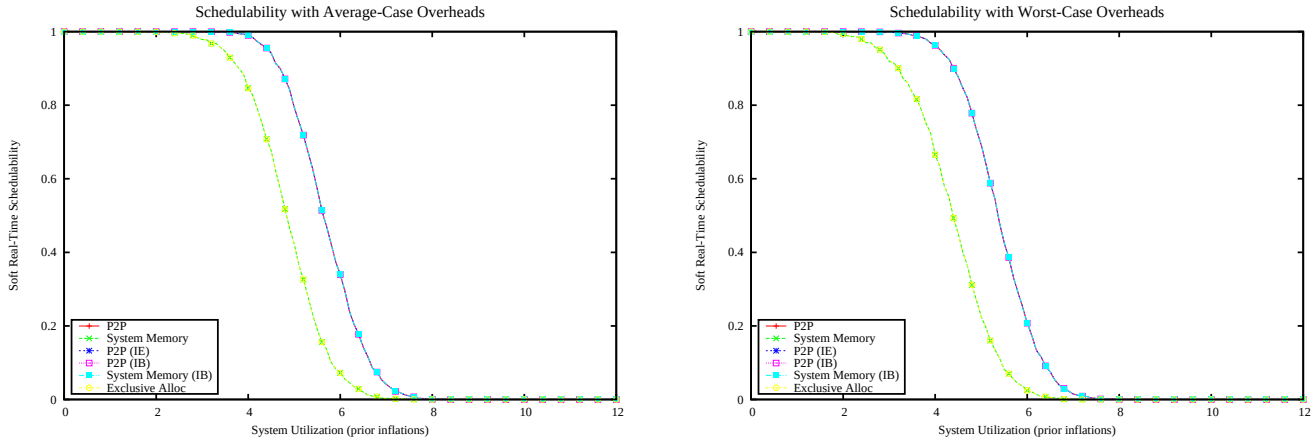

Figure 3213: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

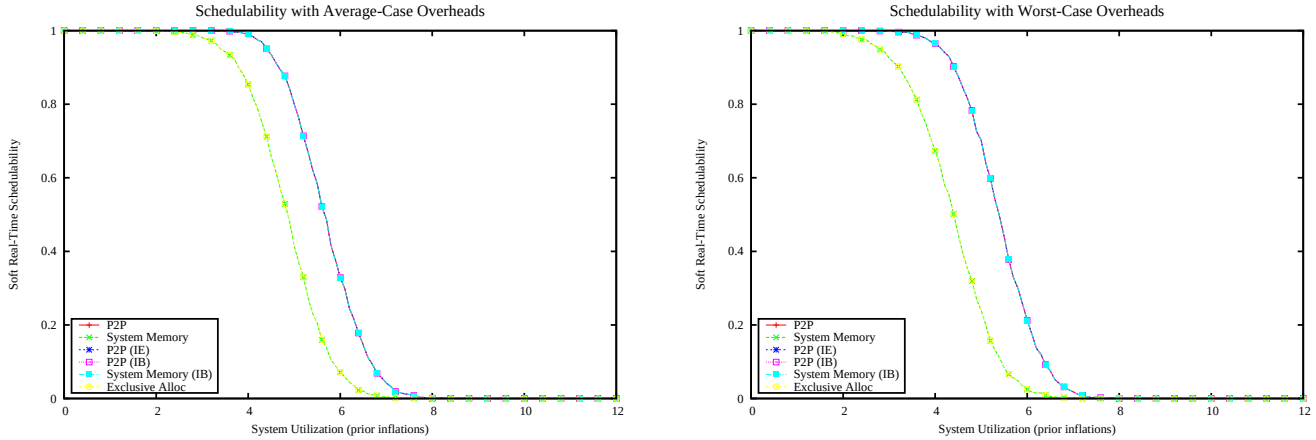

Figure 3214: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

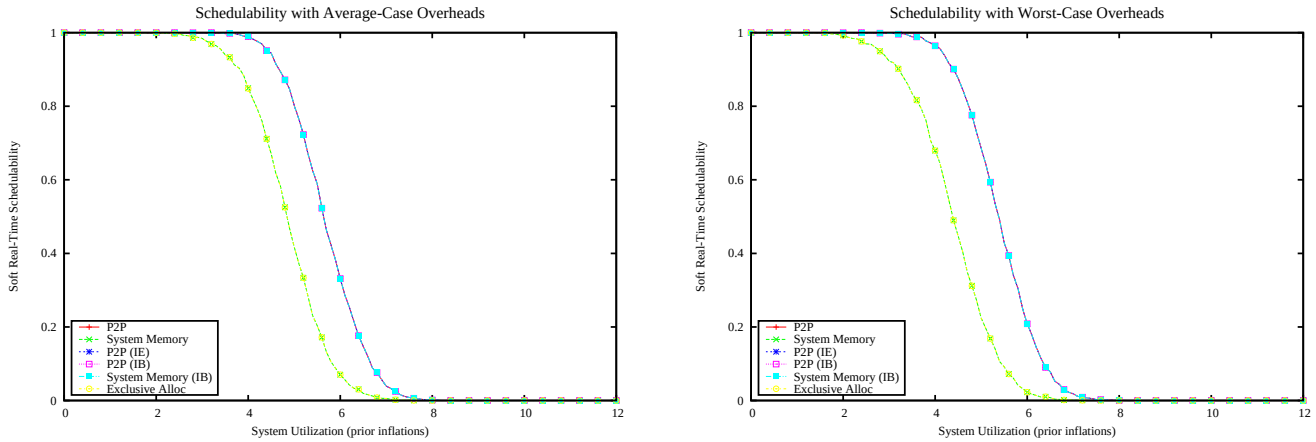

Figure 3215: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

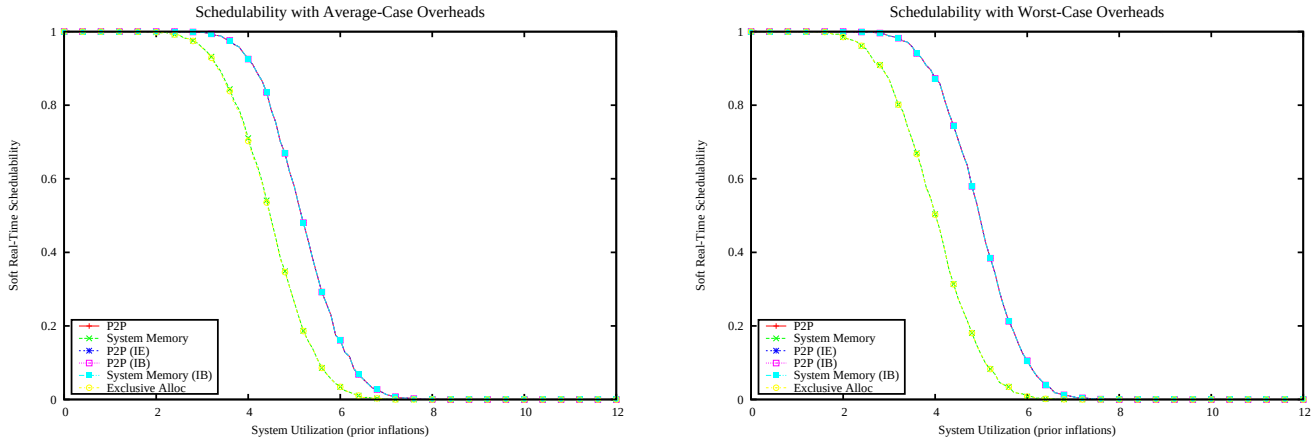

Figure 3216: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

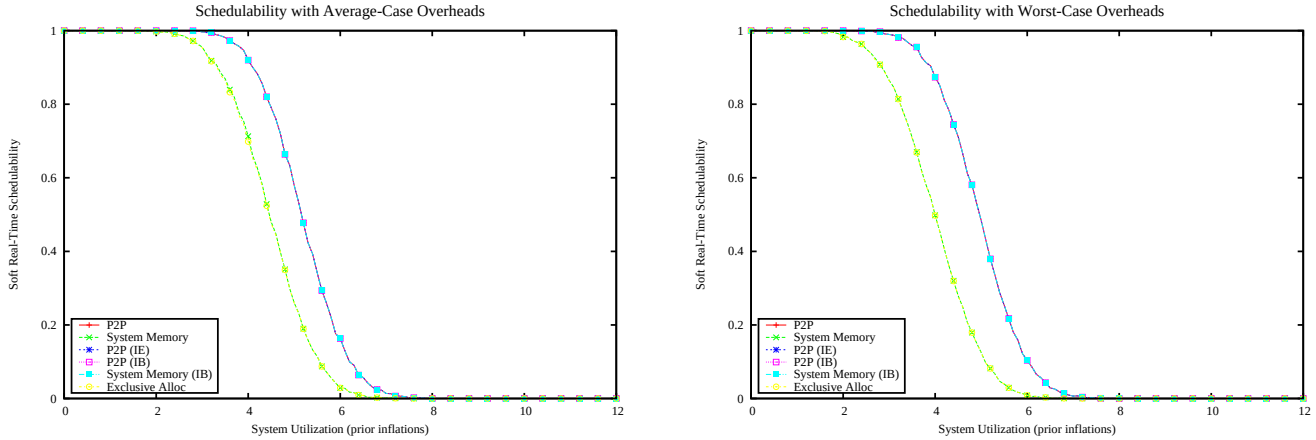

Figure 3217: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

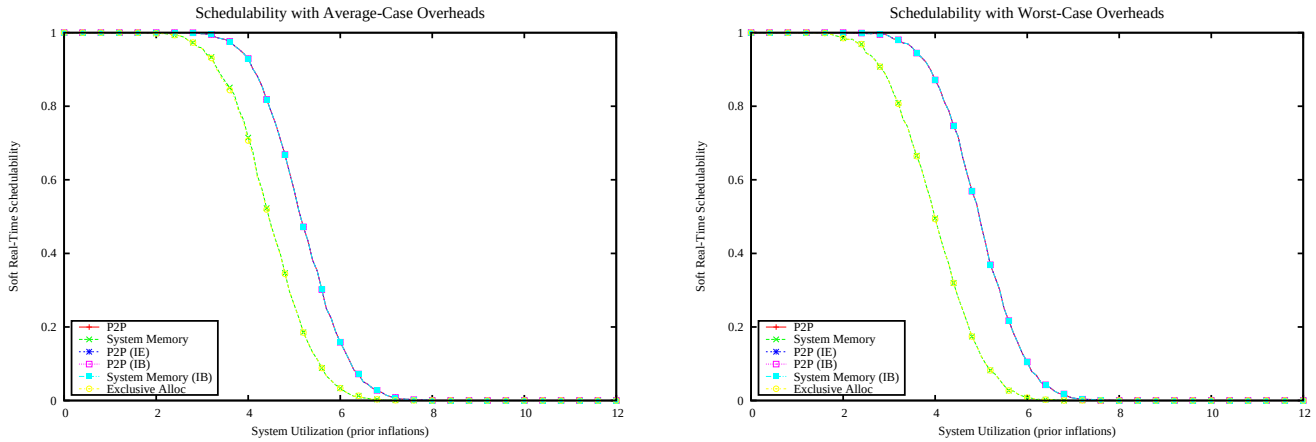

Figure 3218: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

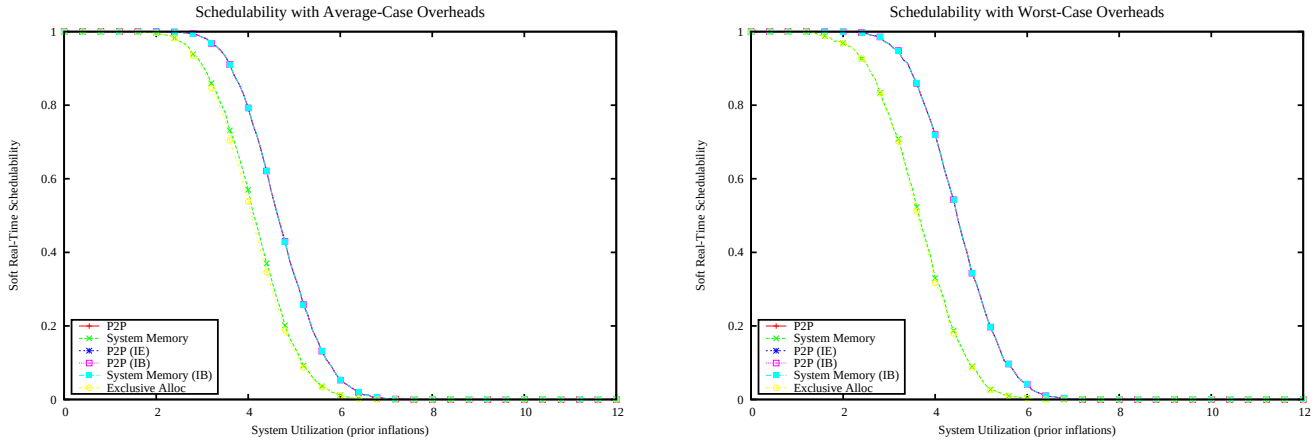

Figure 3219: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

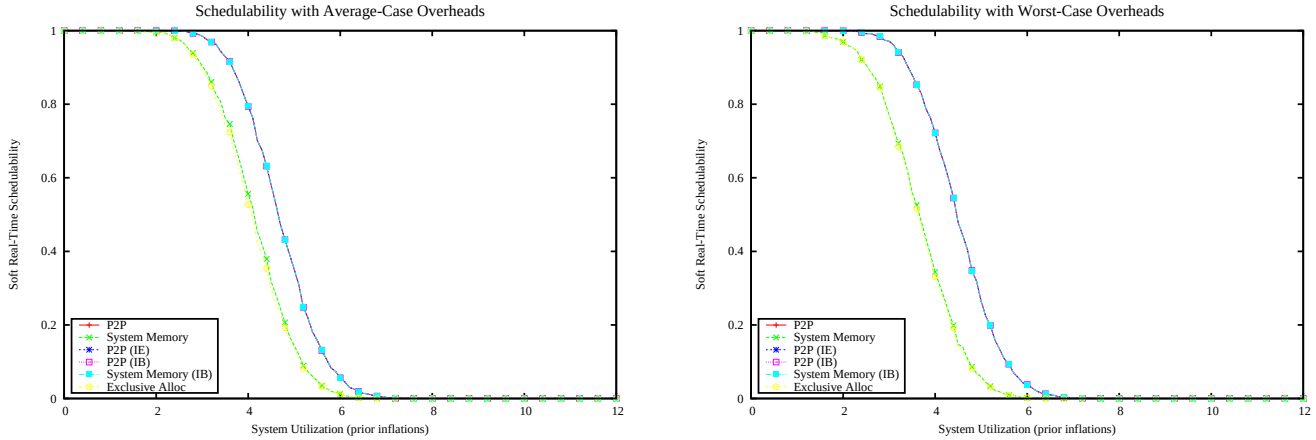

Figure 3220: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

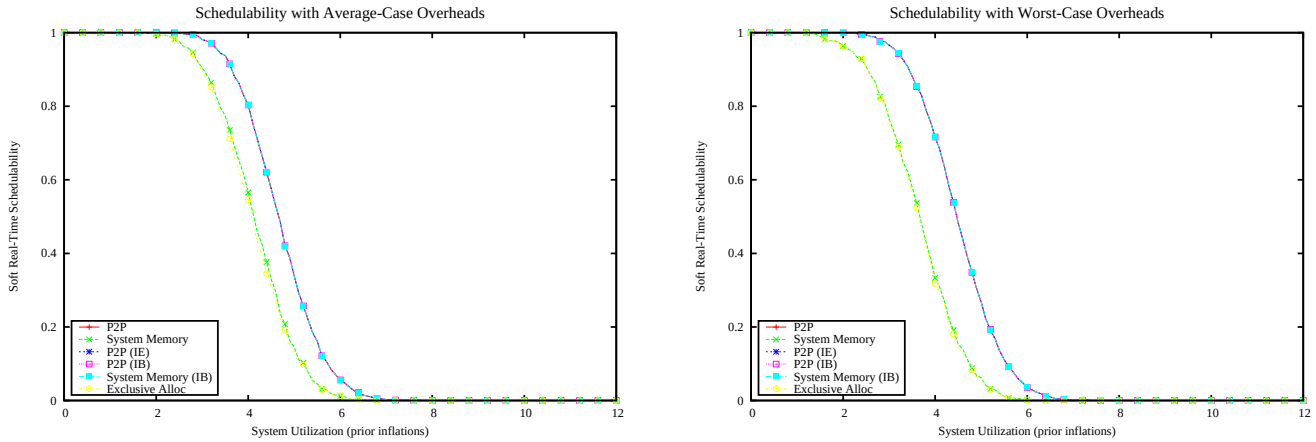

Figure 3221: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

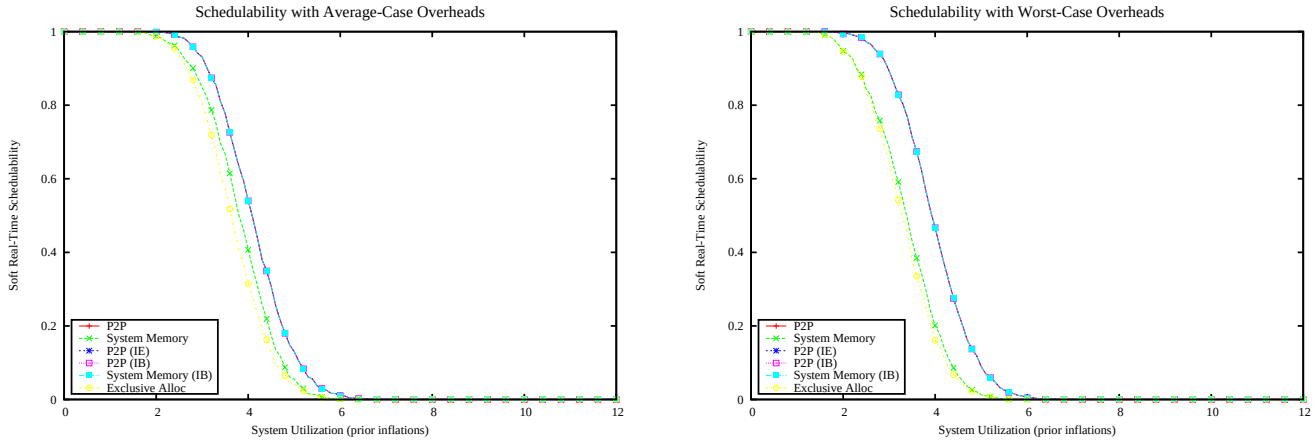

Figure 3222: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

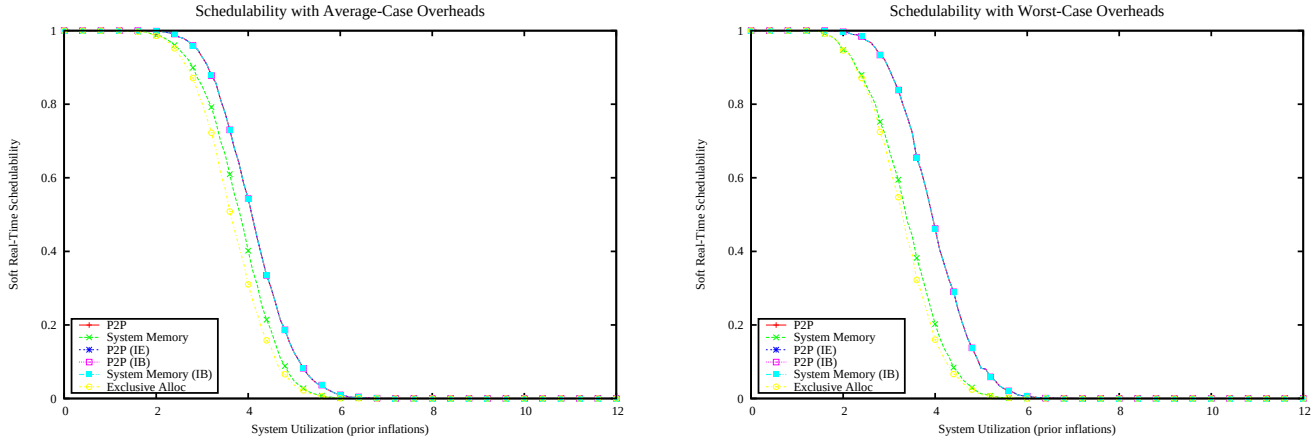

Figure 3223: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

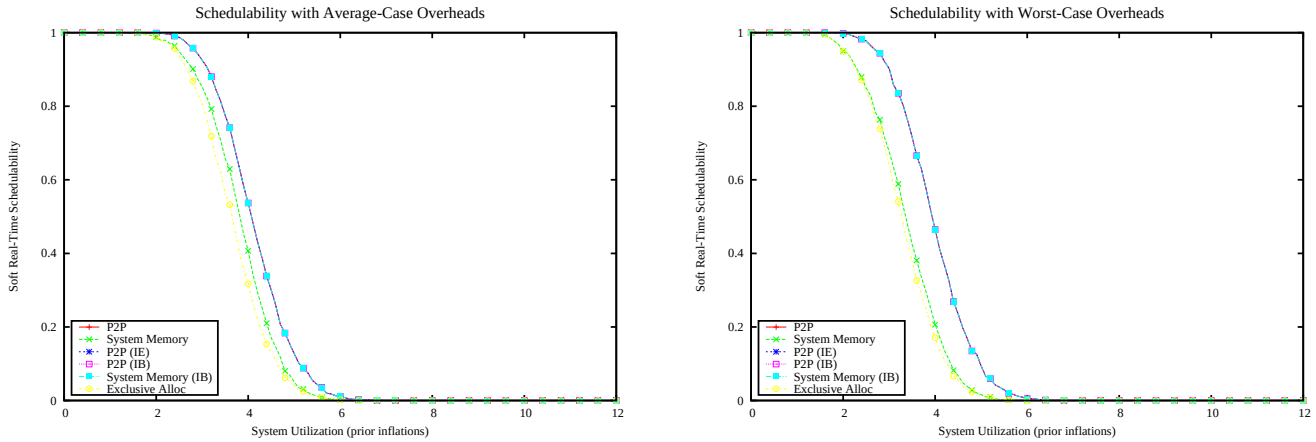

Figure 3224: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

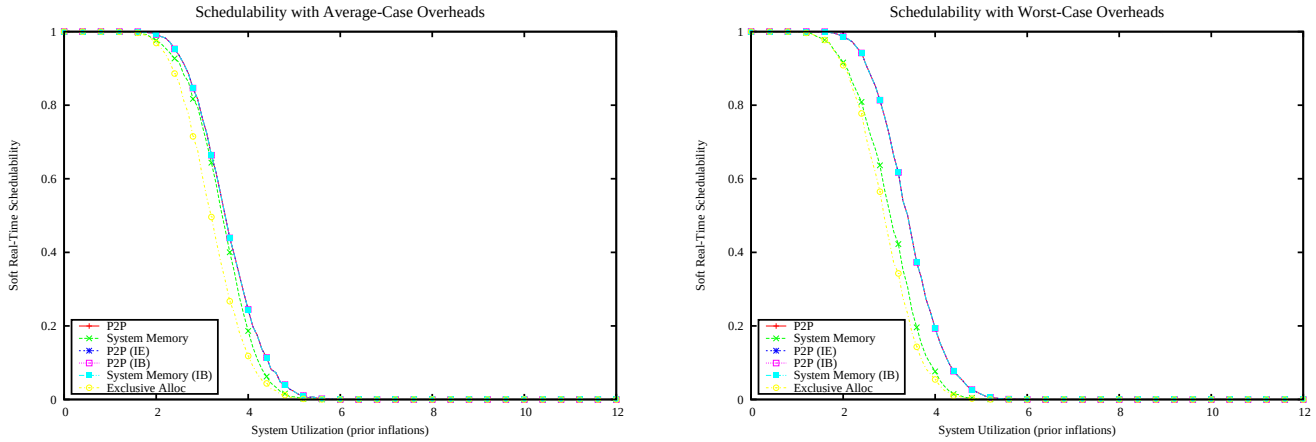

Figure 3225: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

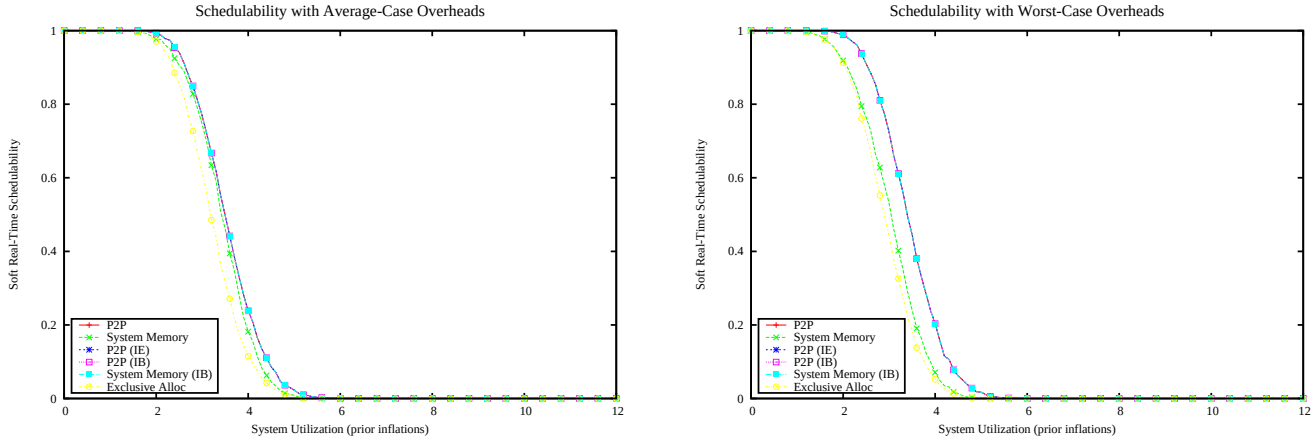

Figure 3226: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

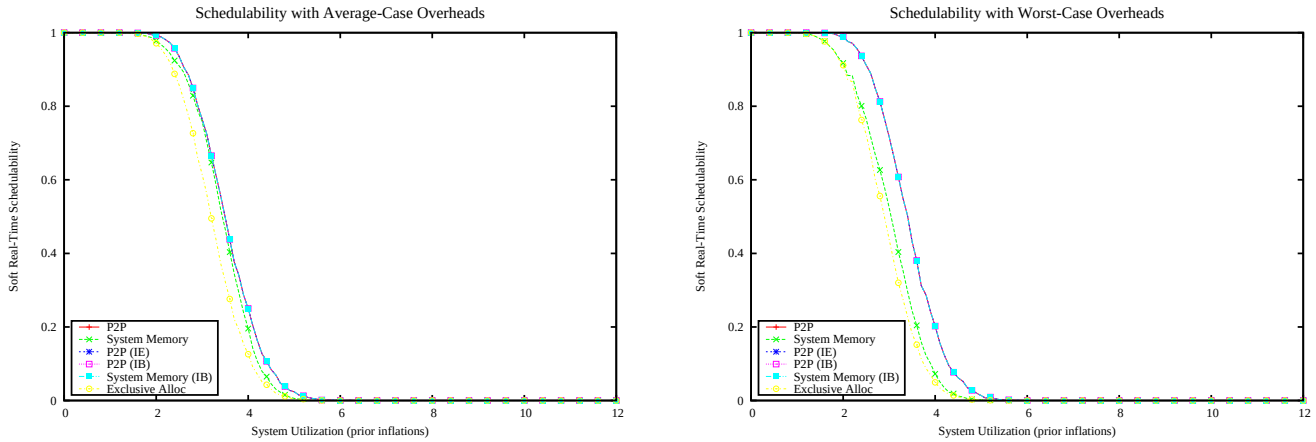

Figure 3227: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

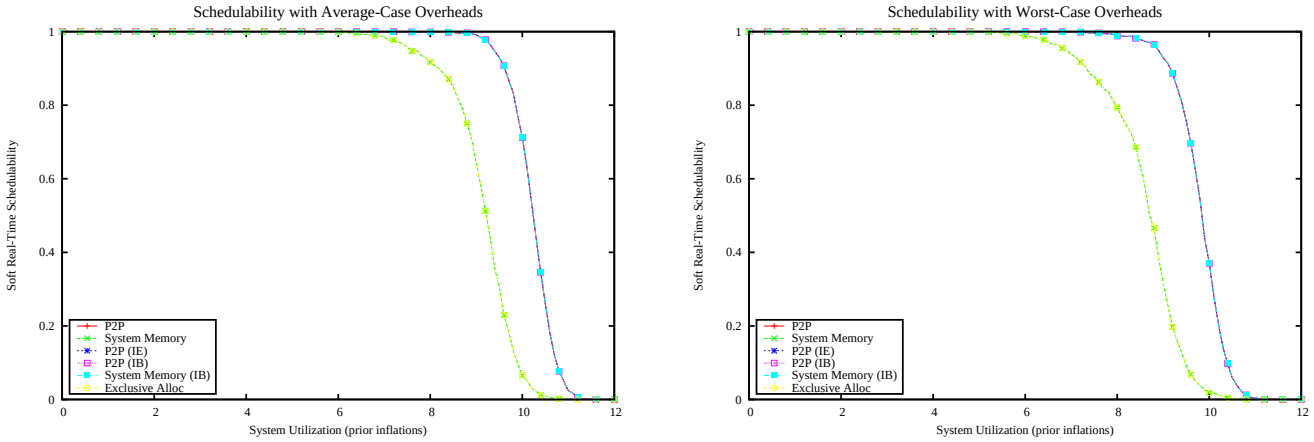

Figure 3228: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

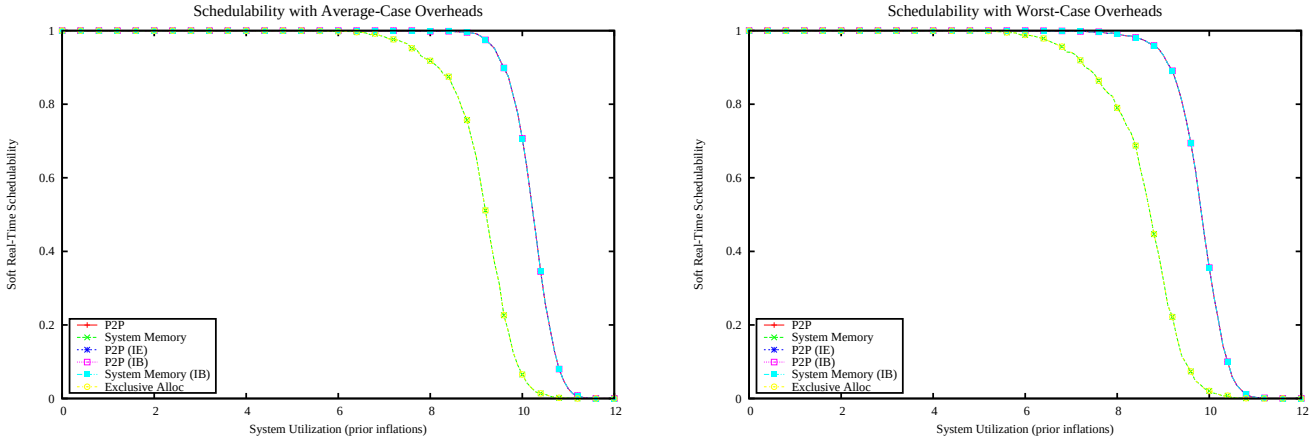

Figure 3229: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

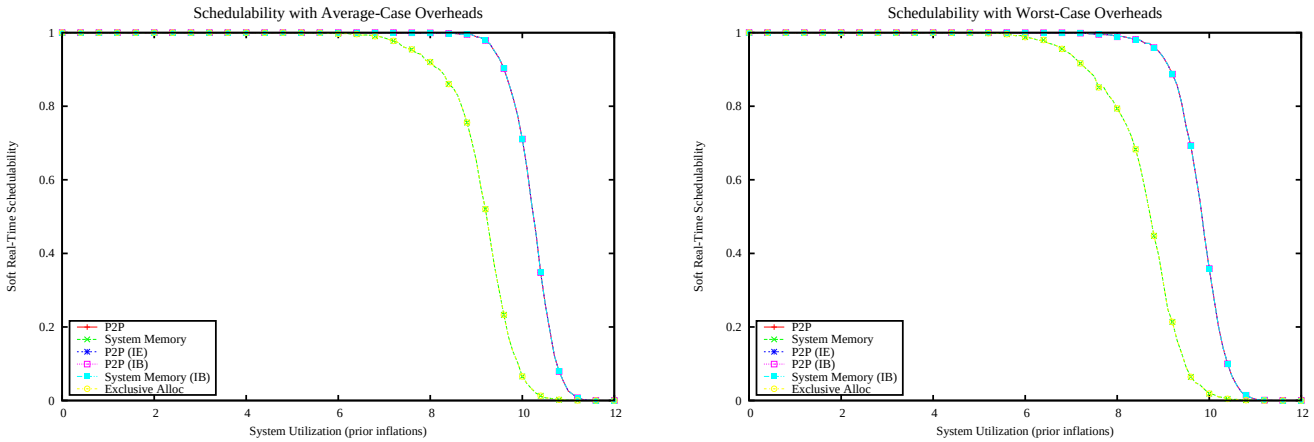

Figure 3230: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

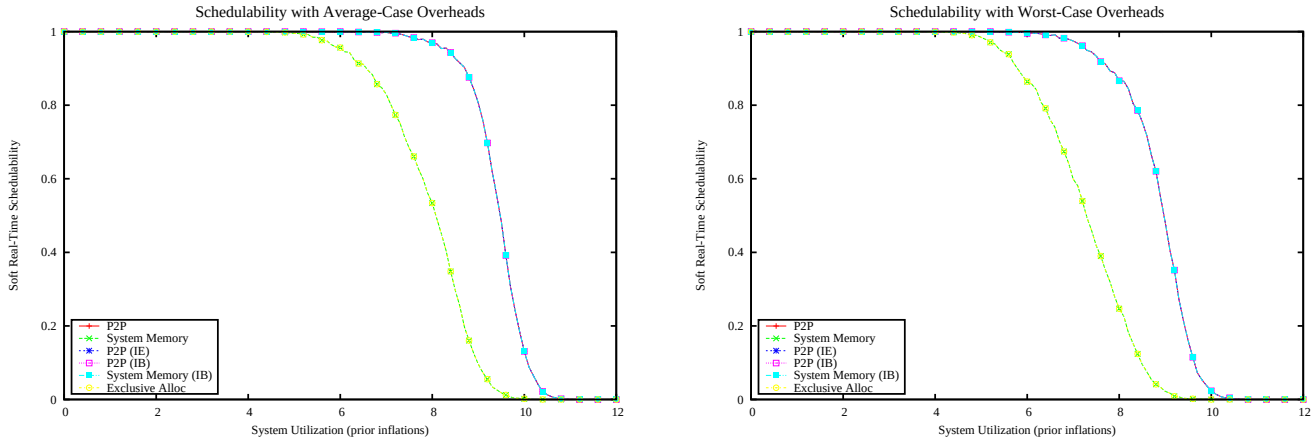

Figure 3231: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

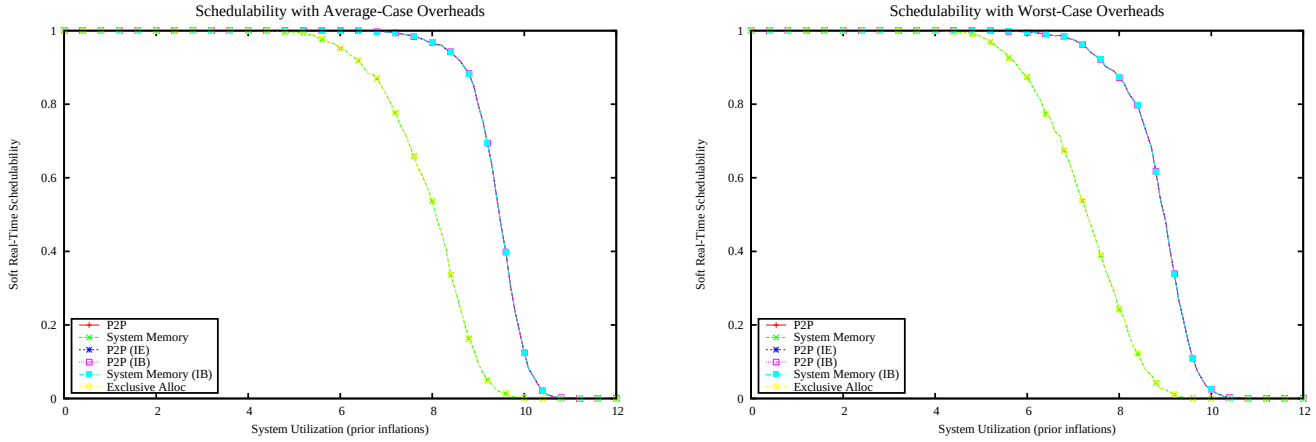

Figure 3232: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

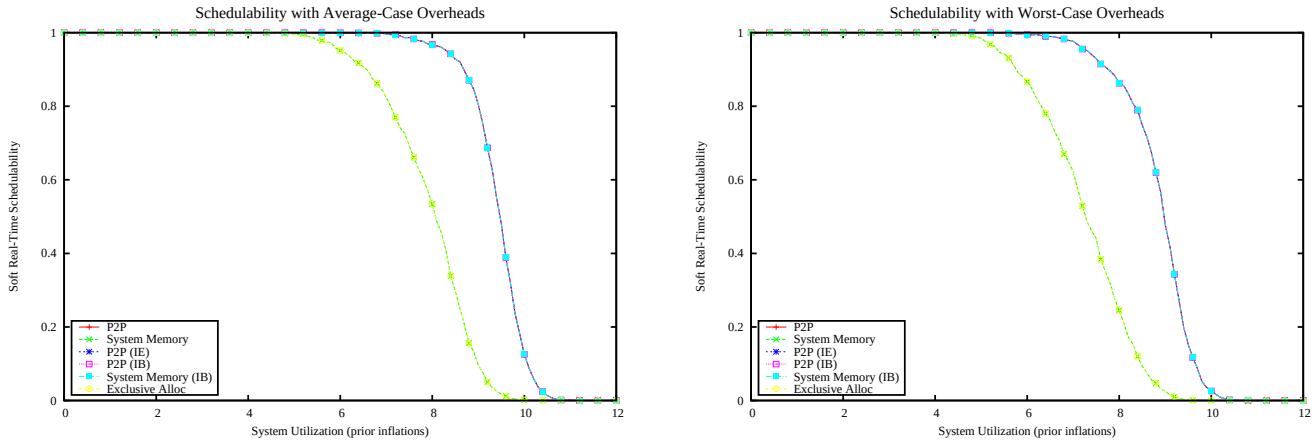

Figure 3233: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

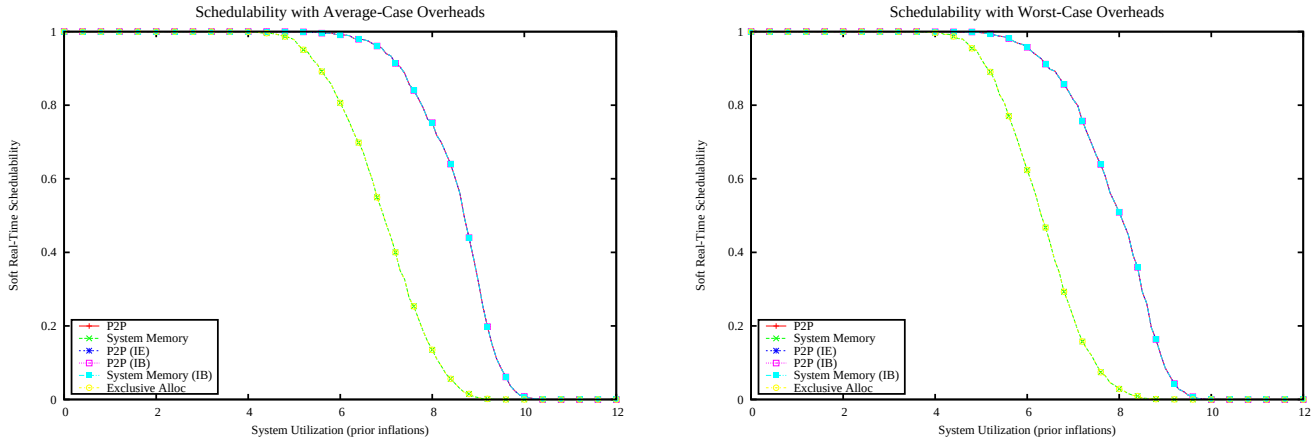

Figure 3234: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

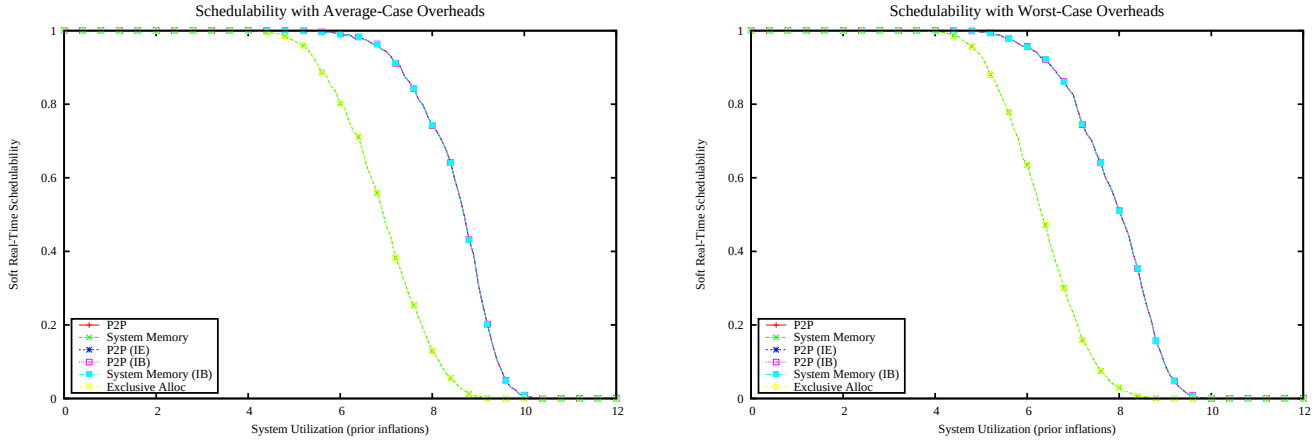

Figure 3235: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

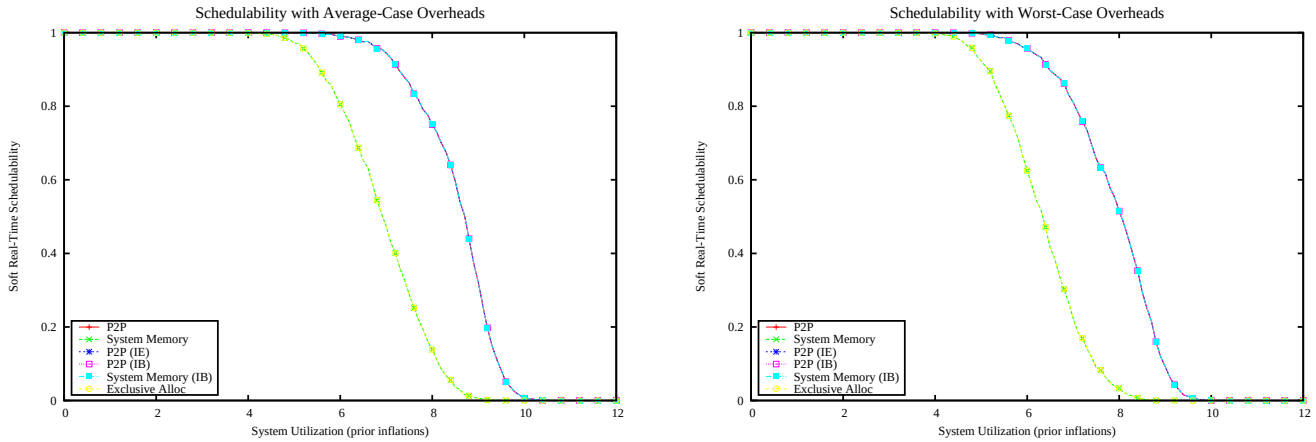

Figure 3236: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

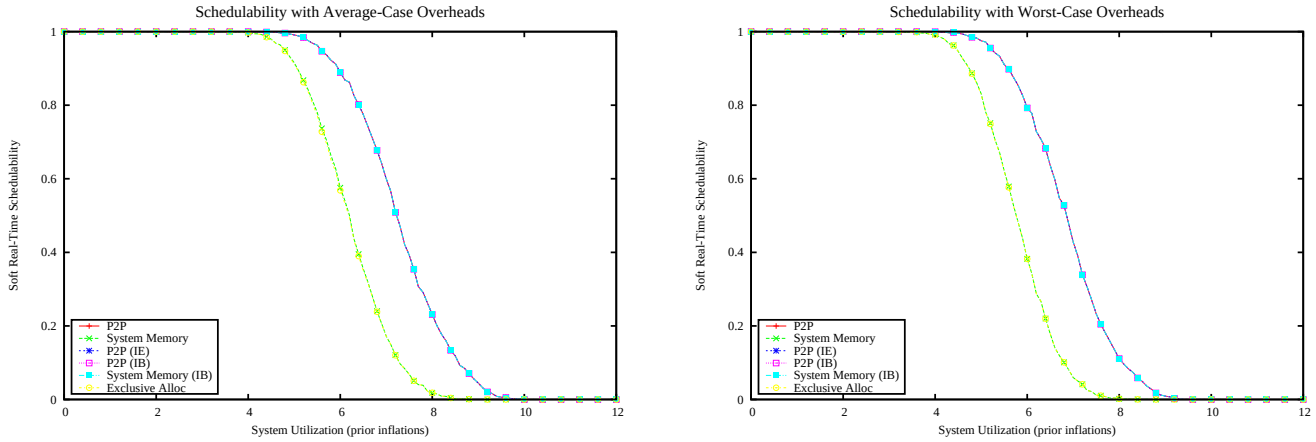

Figure 3237: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

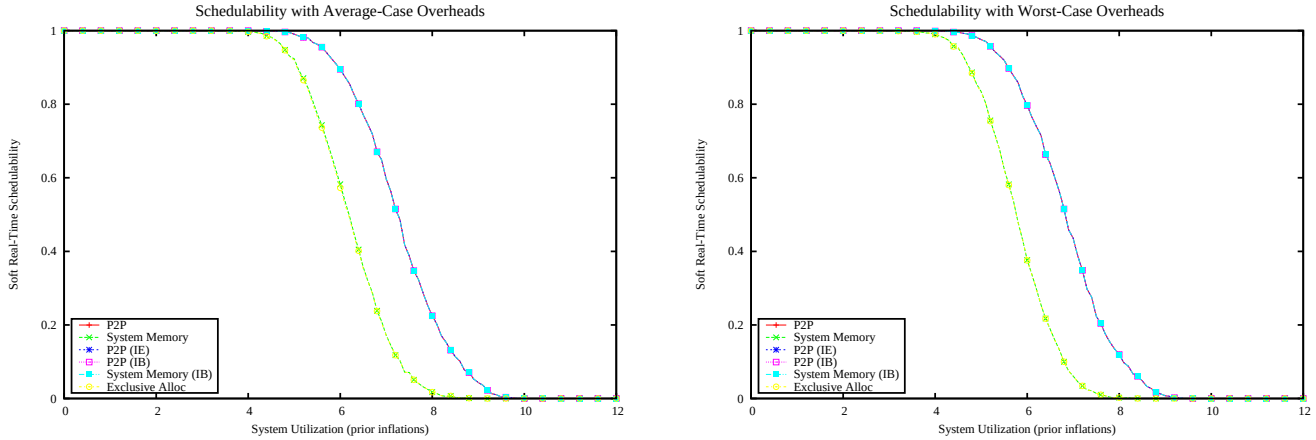

Figure 3238: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

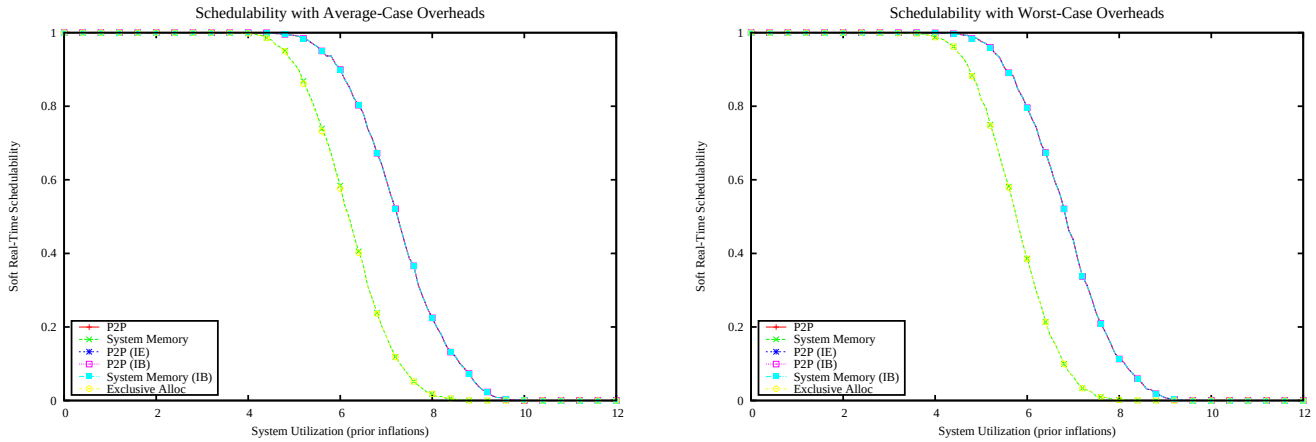

Figure 3239: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

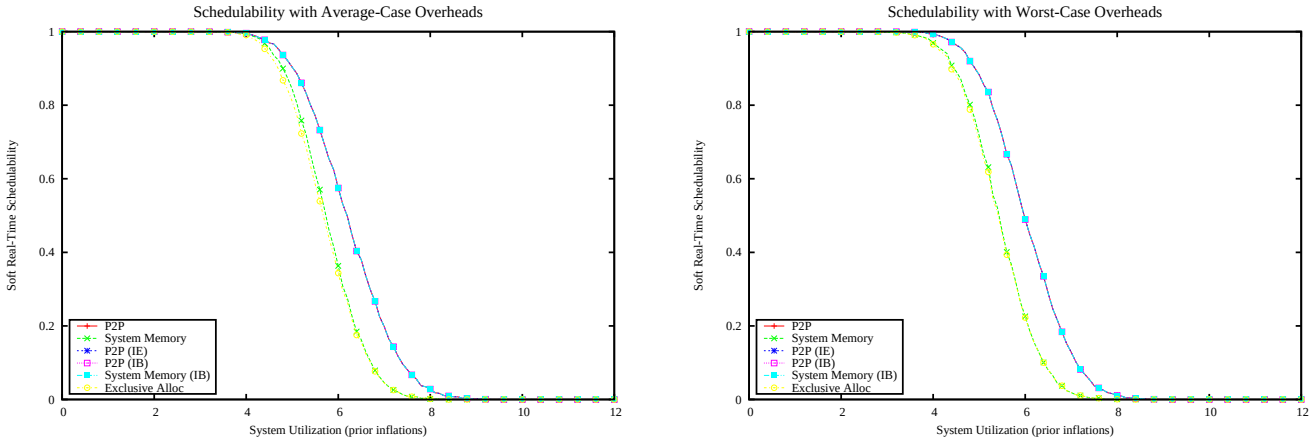

Figure 3240: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

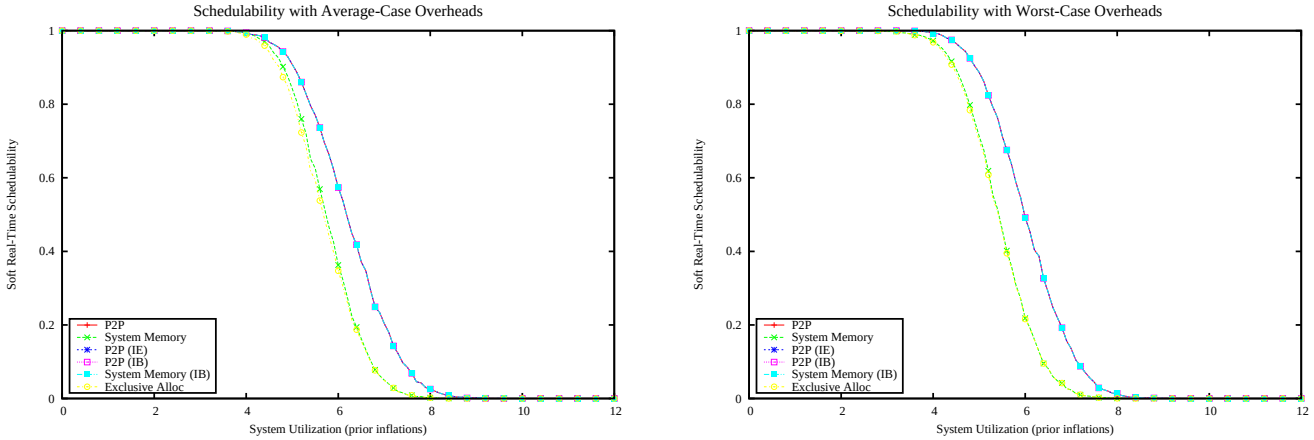

Figure 3241: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

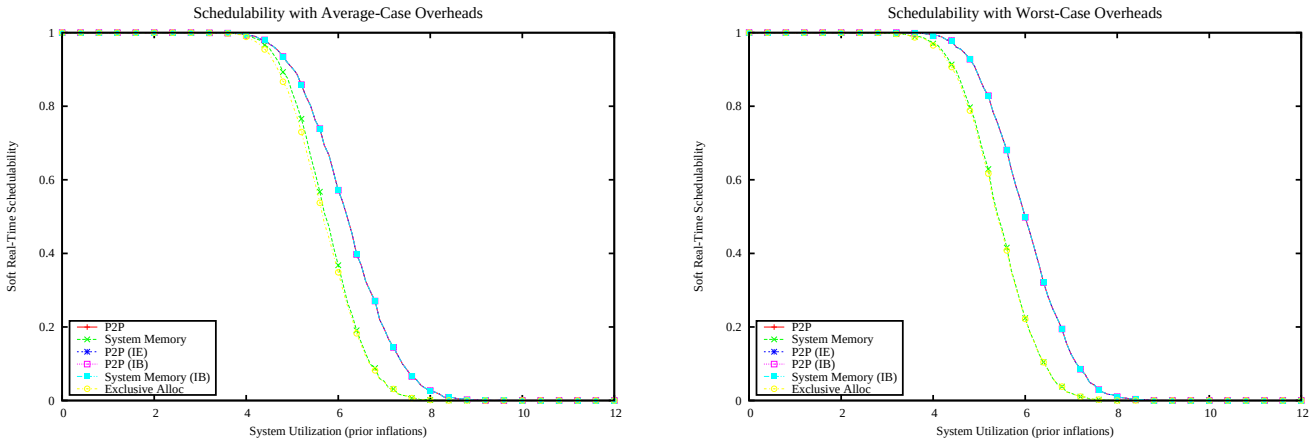

Figure 3242: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

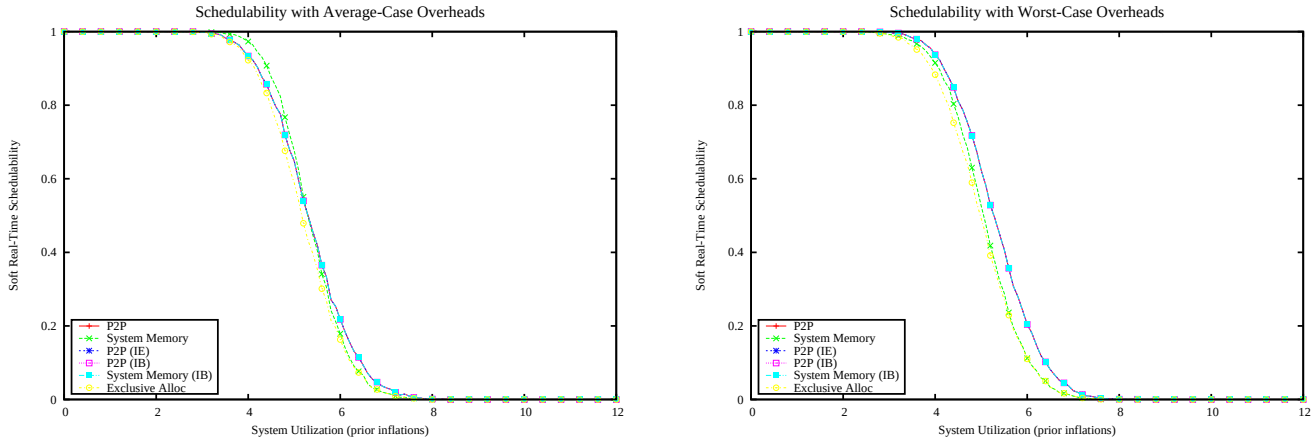

Figure 3243: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

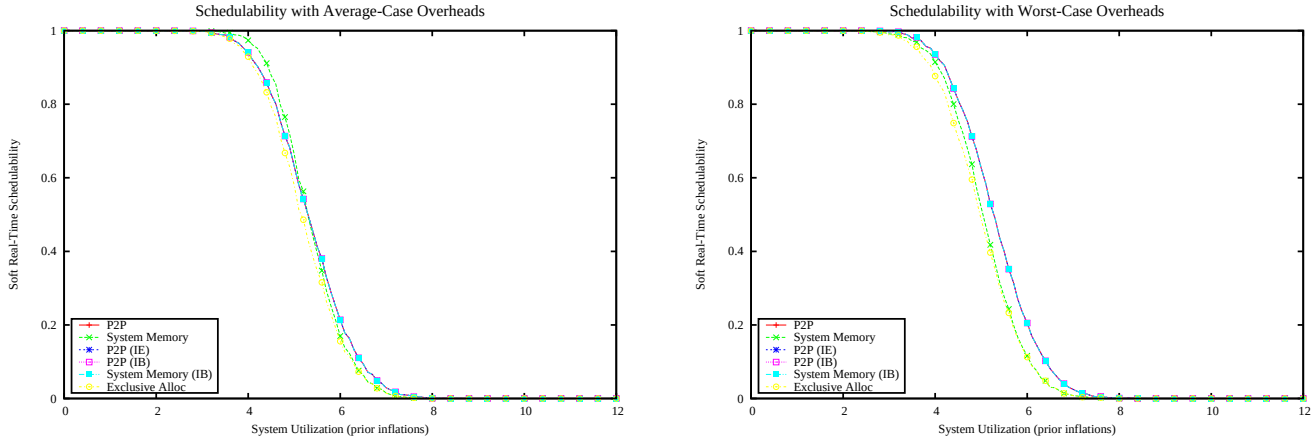

Figure 3244: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

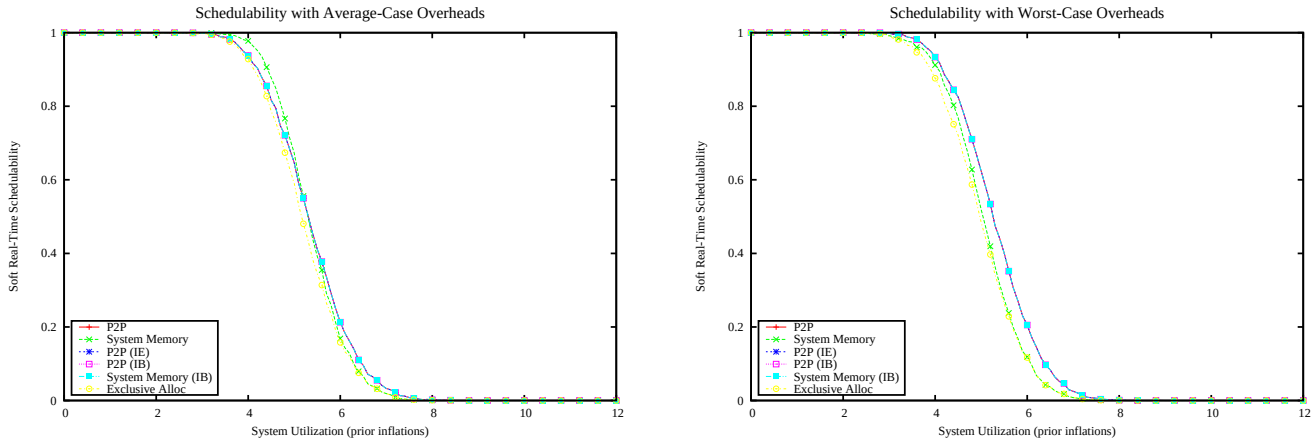

Figure 3245: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

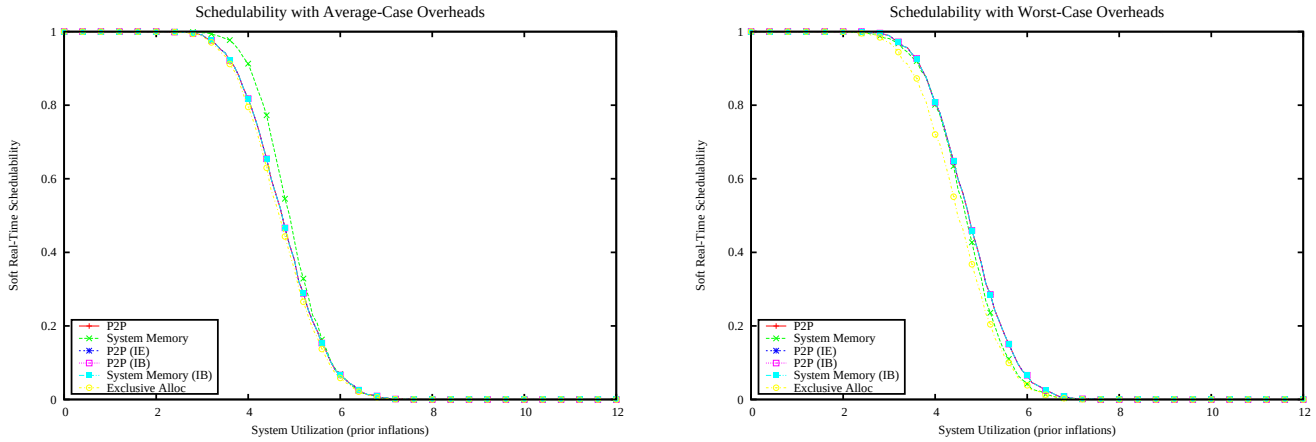

Figure 3246: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

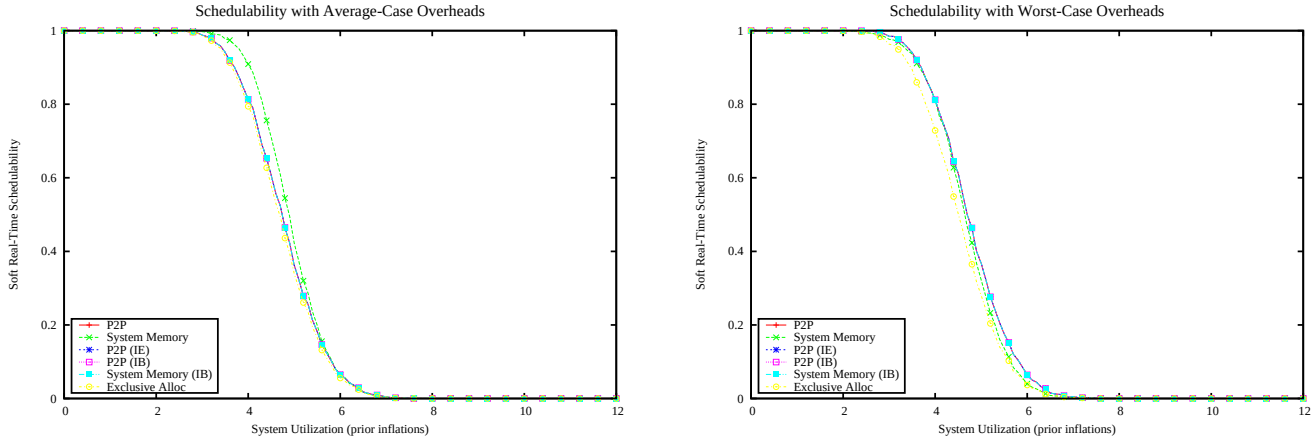

Figure 3247: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

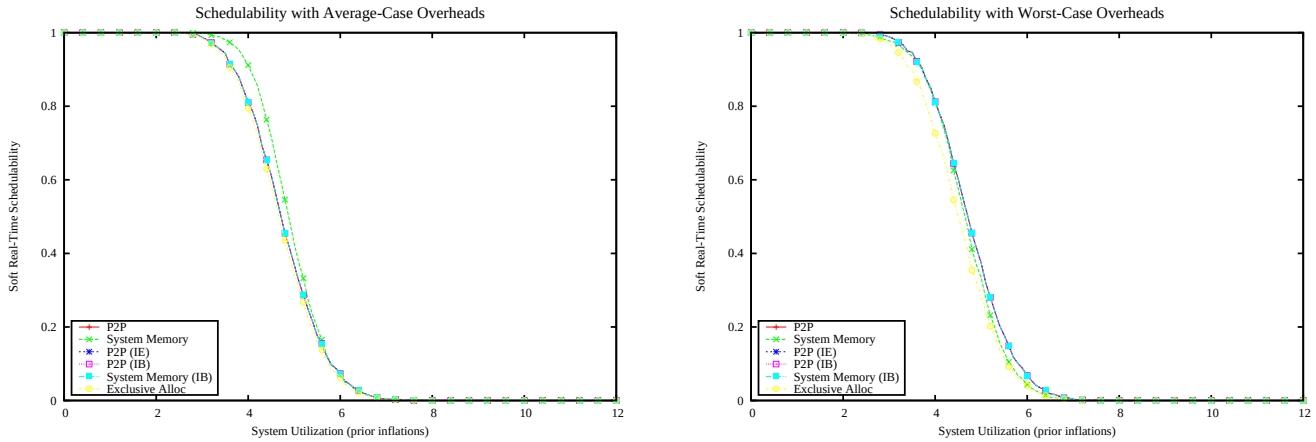

Figure 3248: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

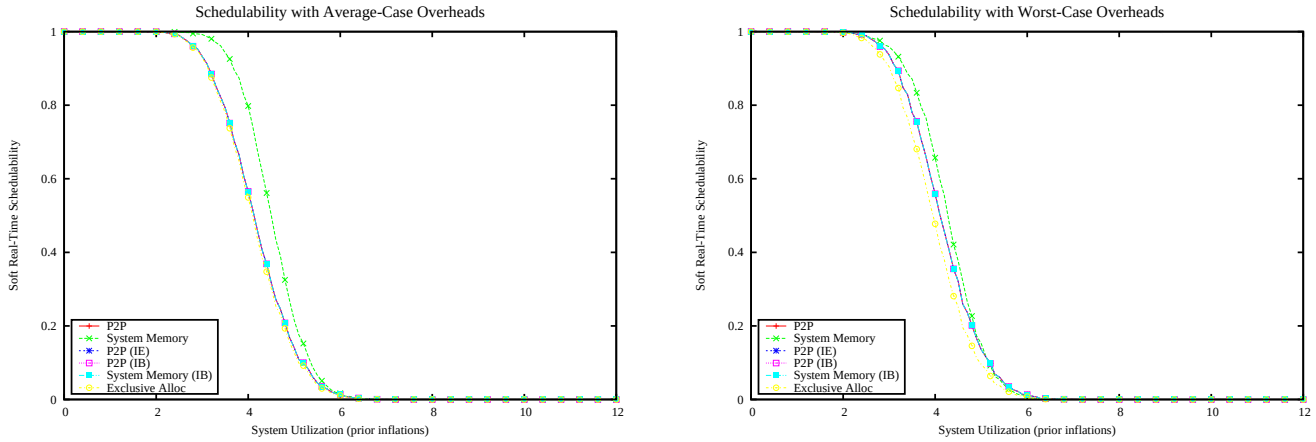

Figure 3249: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

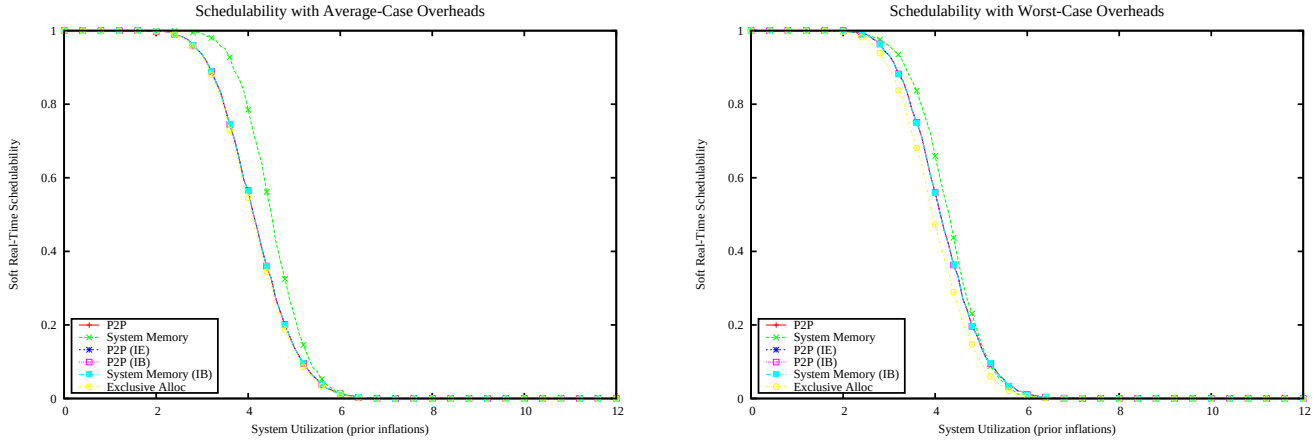

Figure 3250: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

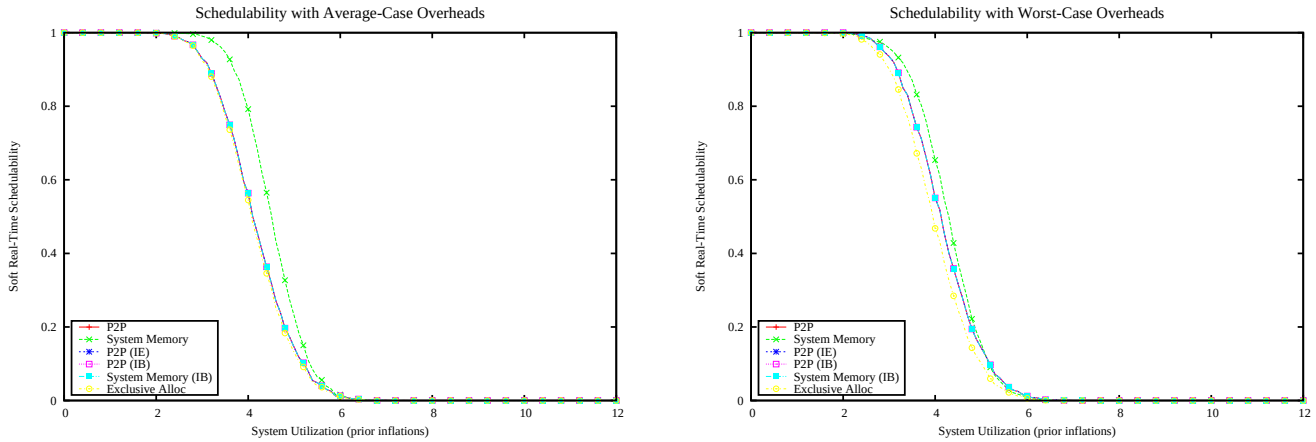

Figure 3251: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

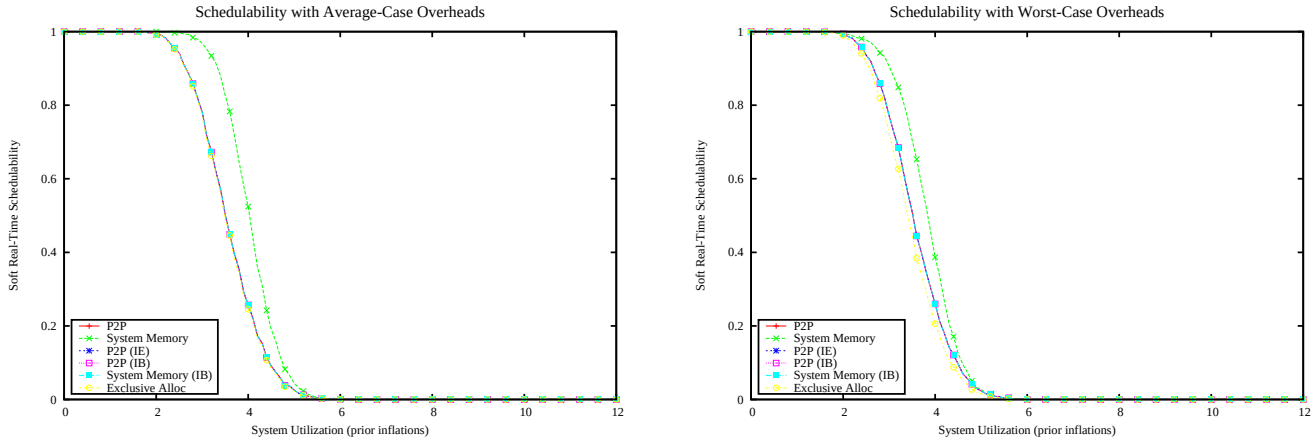

Figure 3252: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

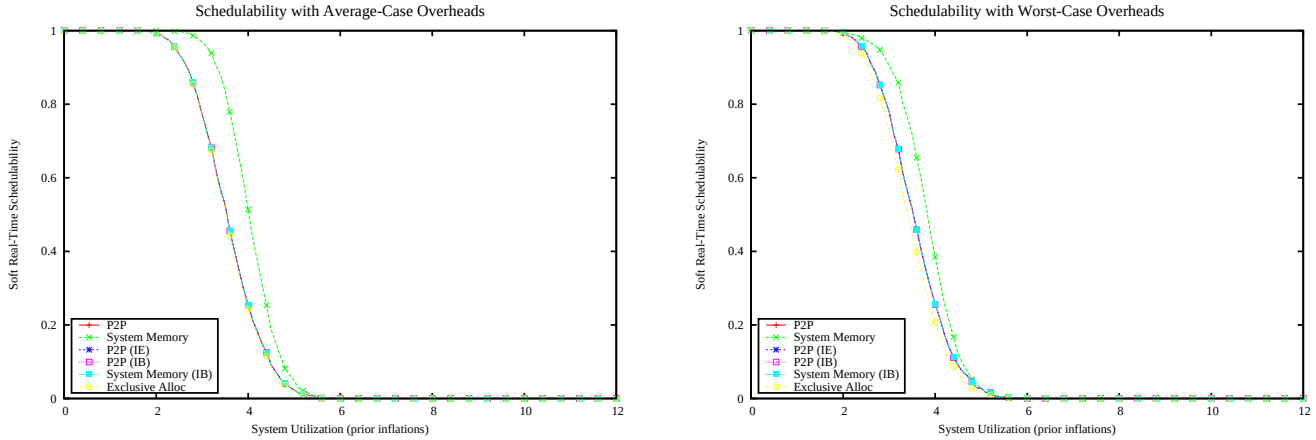

Figure 3253: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

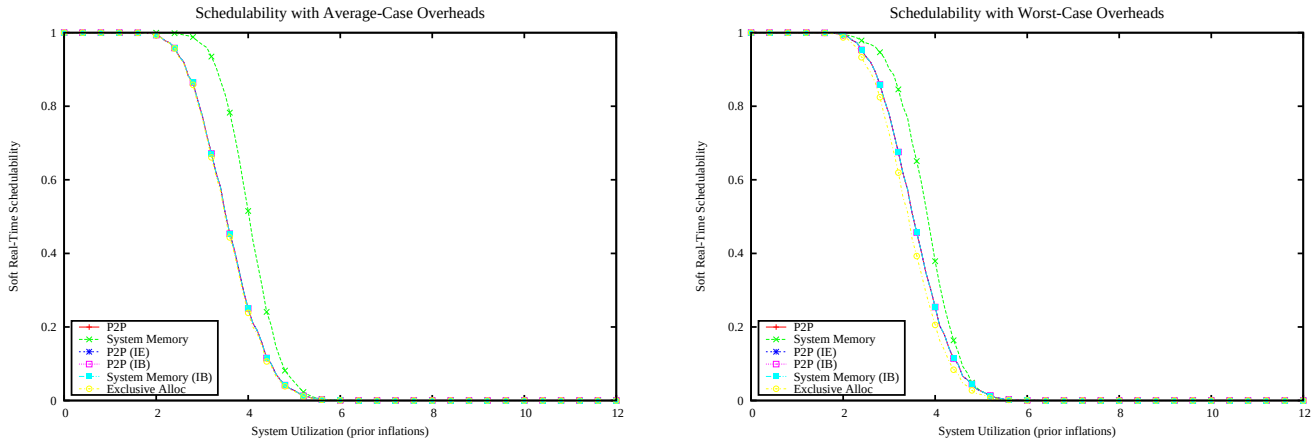

Figure 3254: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

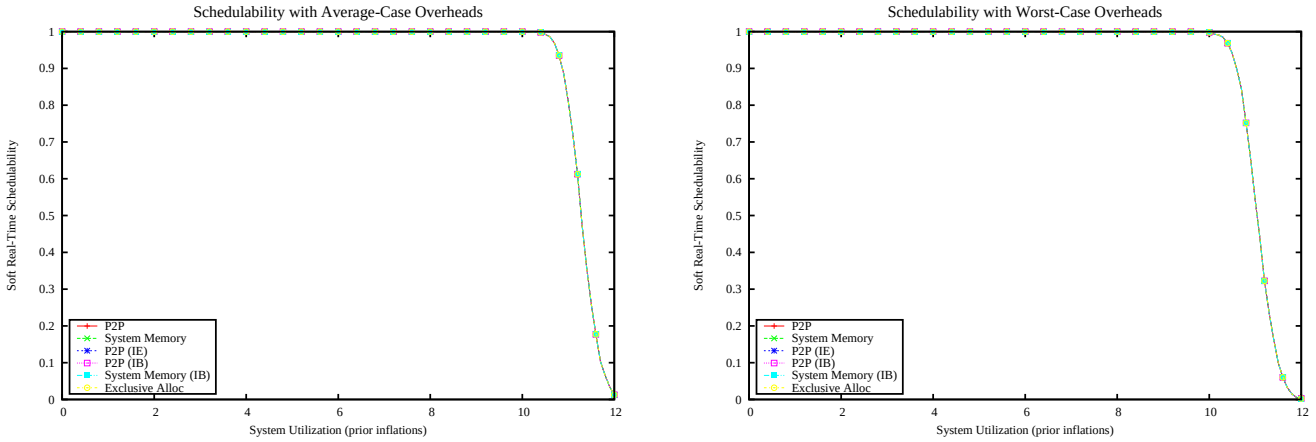

Figure 3255: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

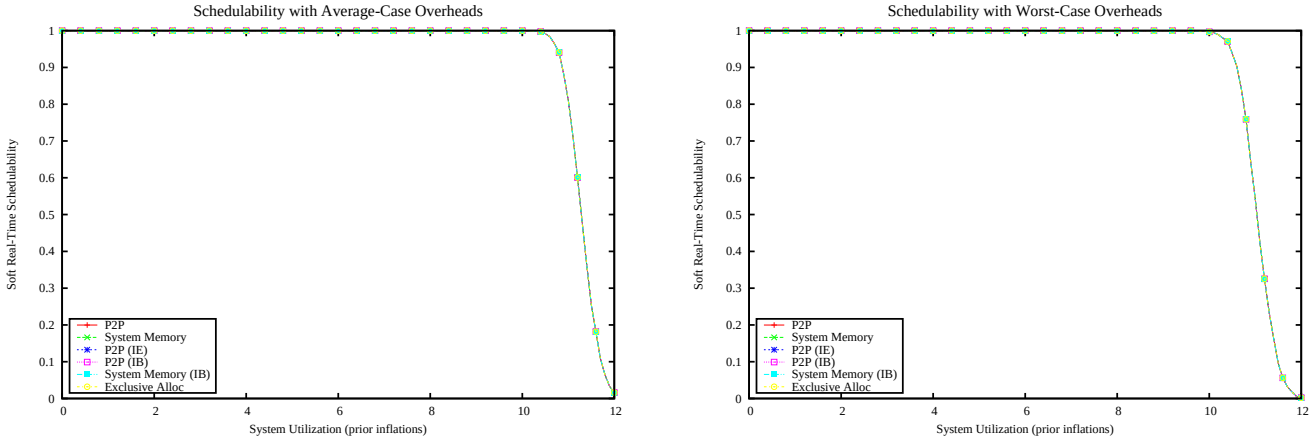

Figure 3256: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

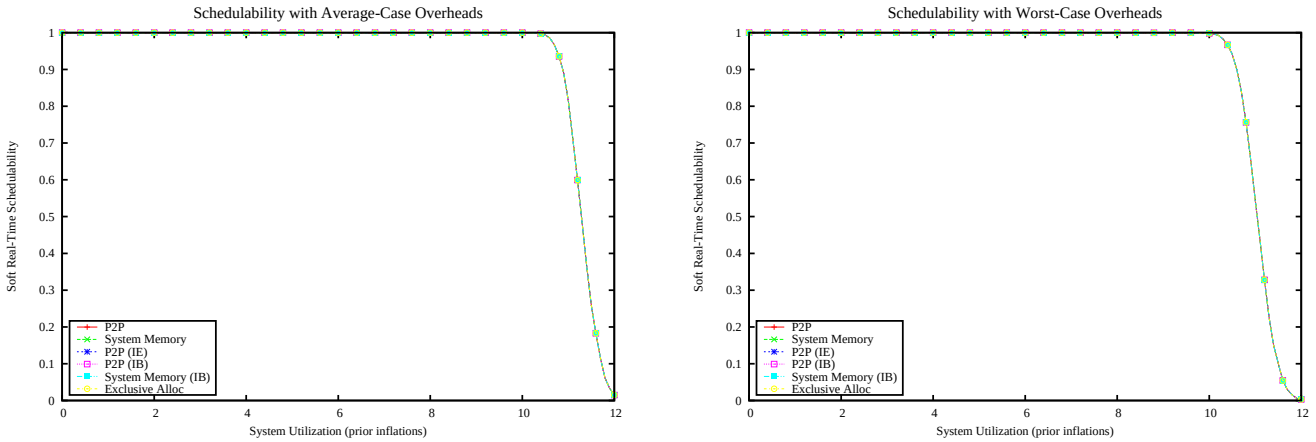

Figure 3257: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

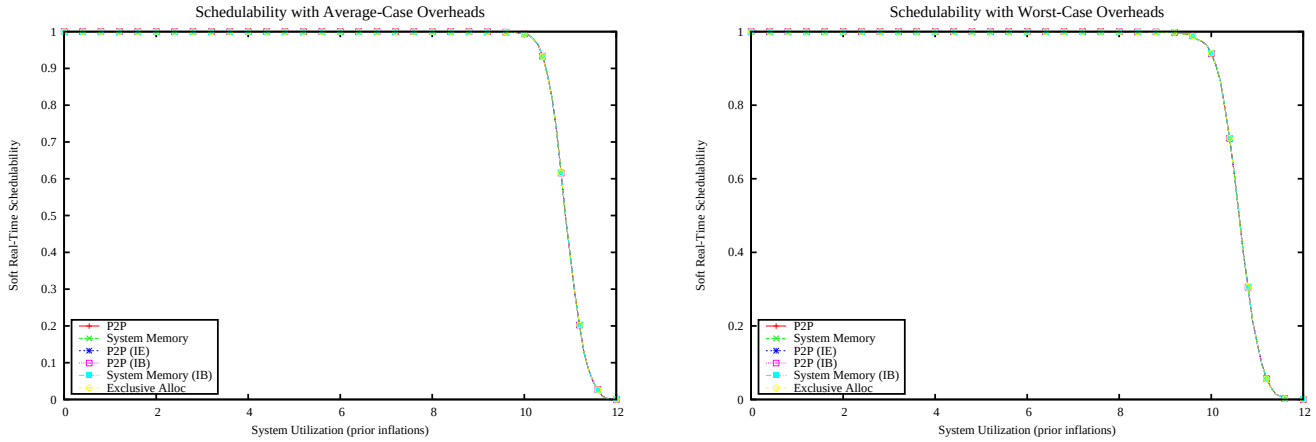

Figure 3258: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

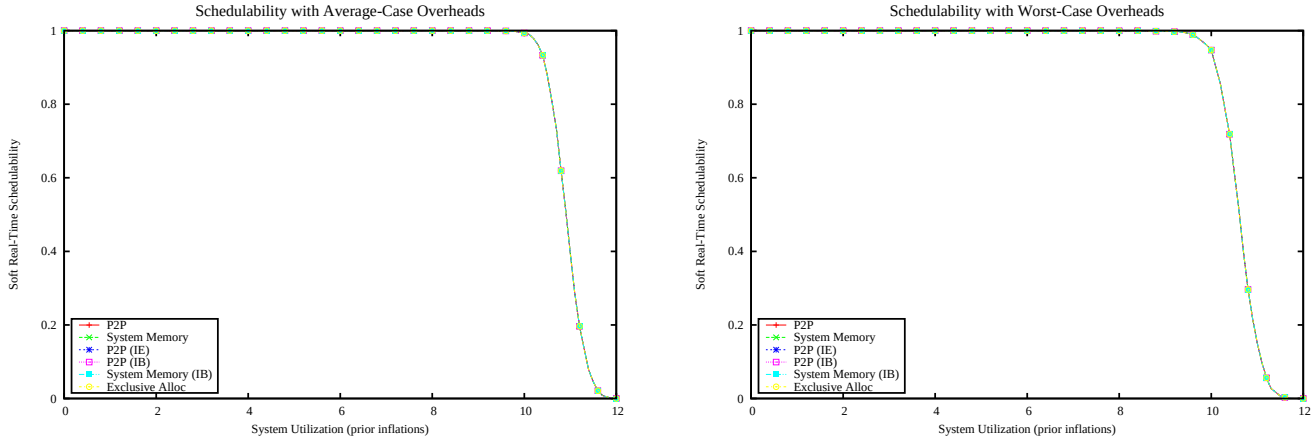

Figure 3259: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

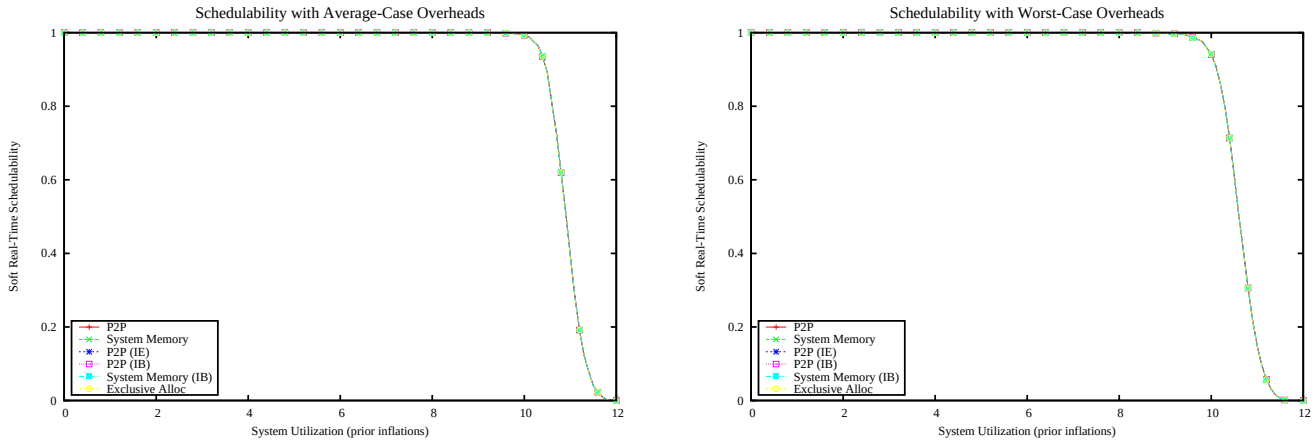

Figure 3260: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

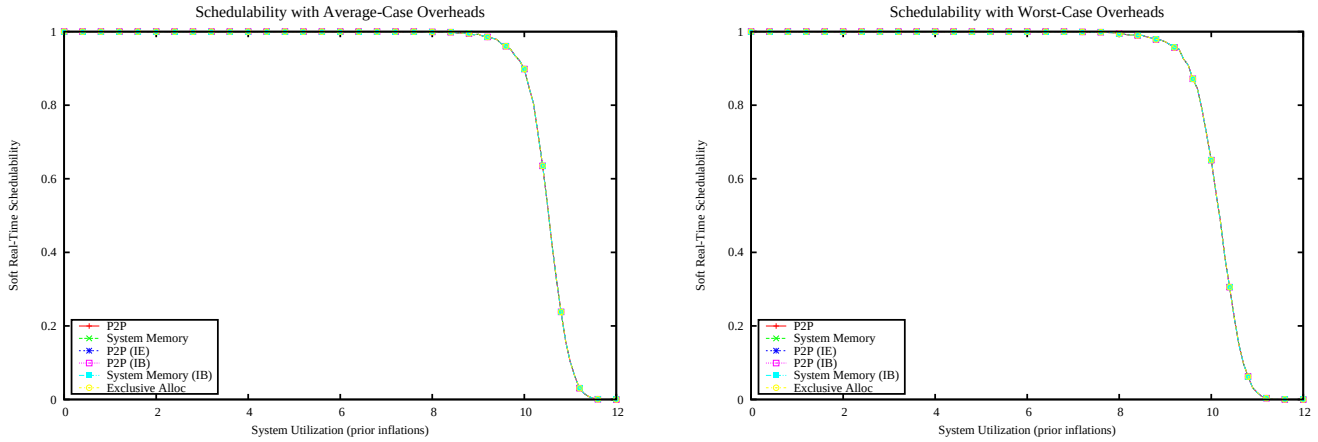

Figure 3261: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

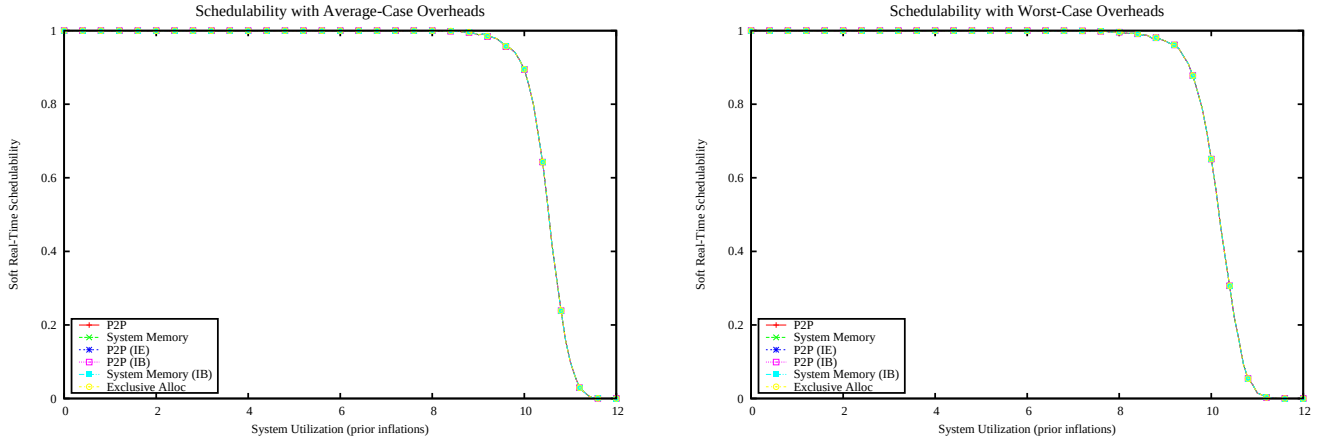

Figure 3262: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

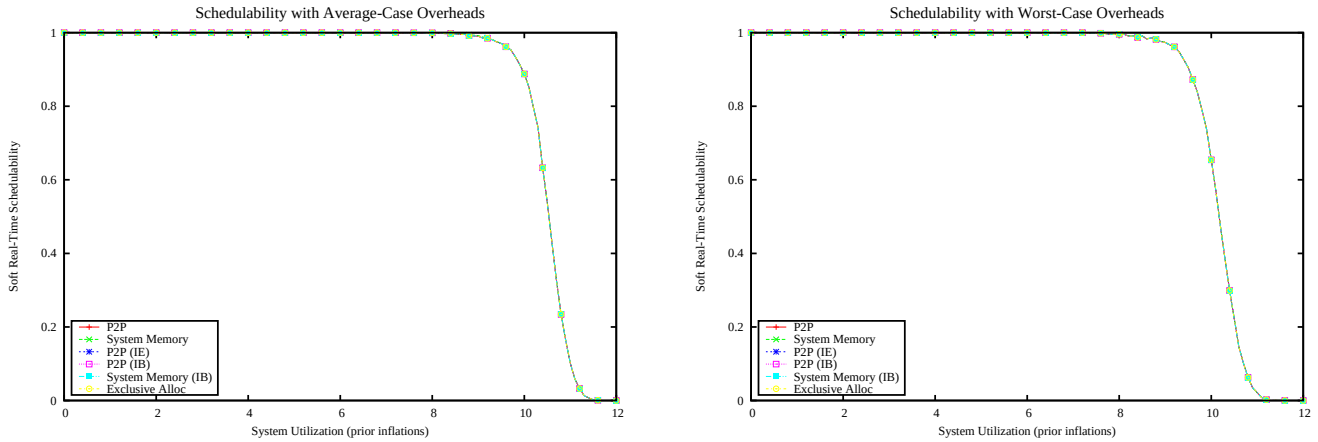

Figure 3263: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

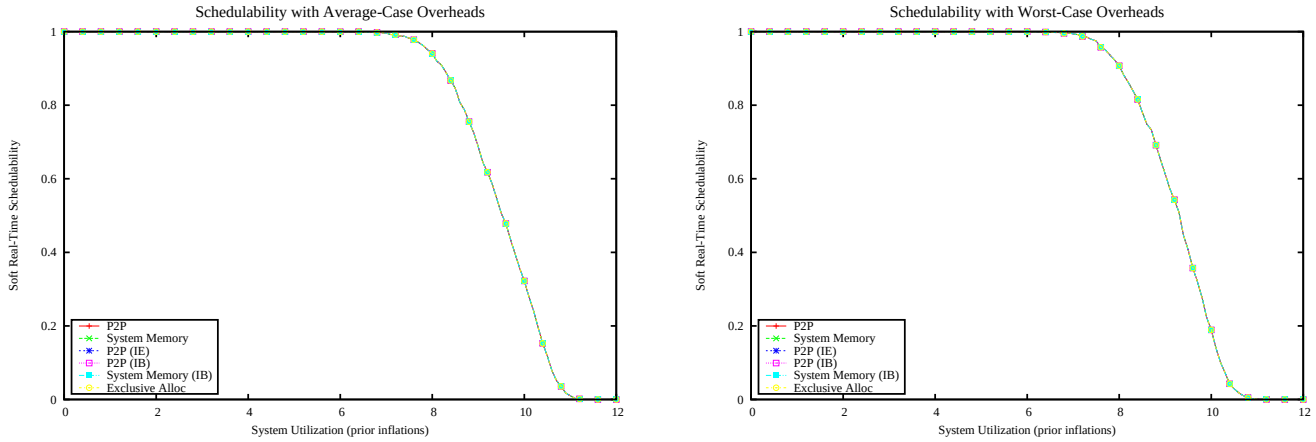

Figure 3264: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

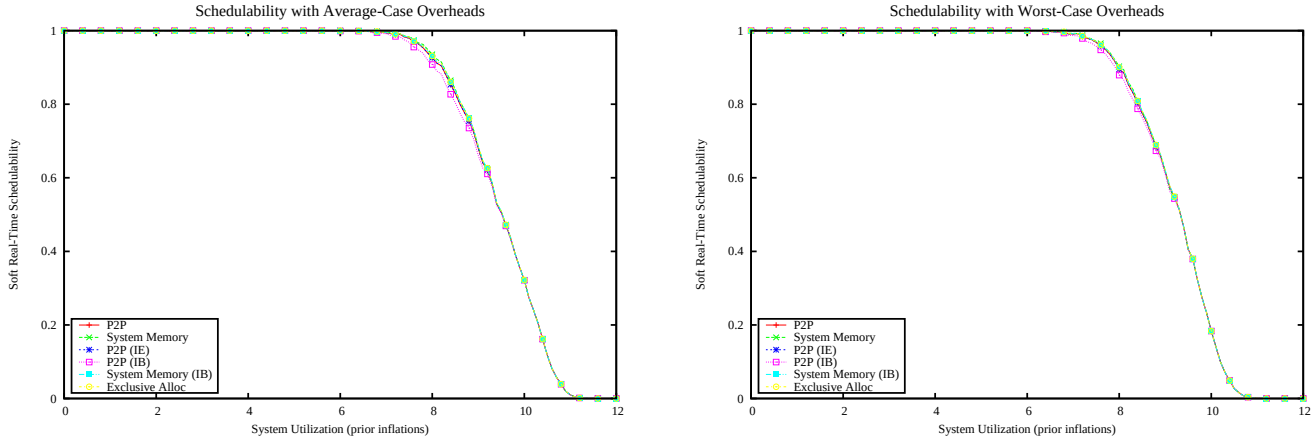

Figure 3265: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

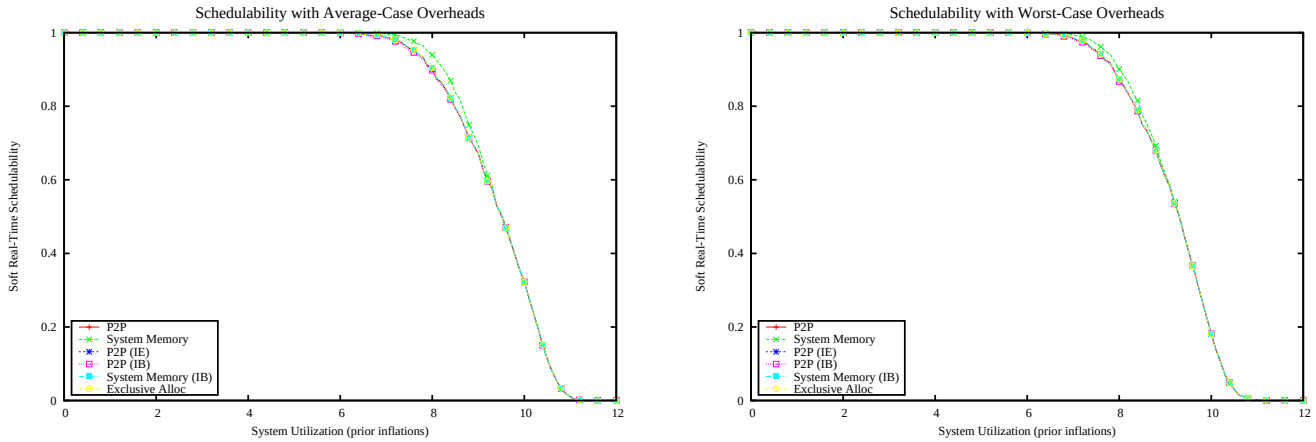

Figure 3266: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

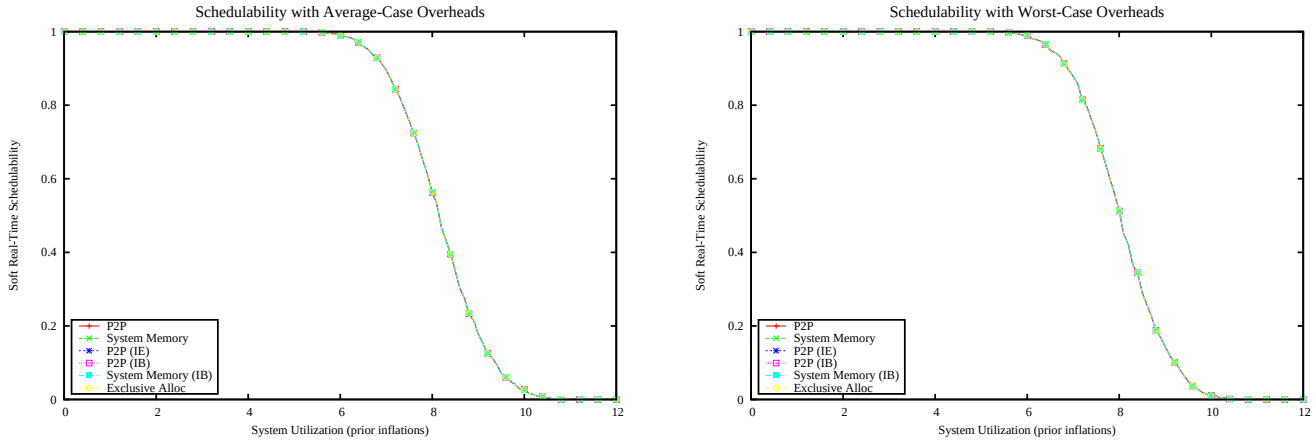

Figure 3267: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

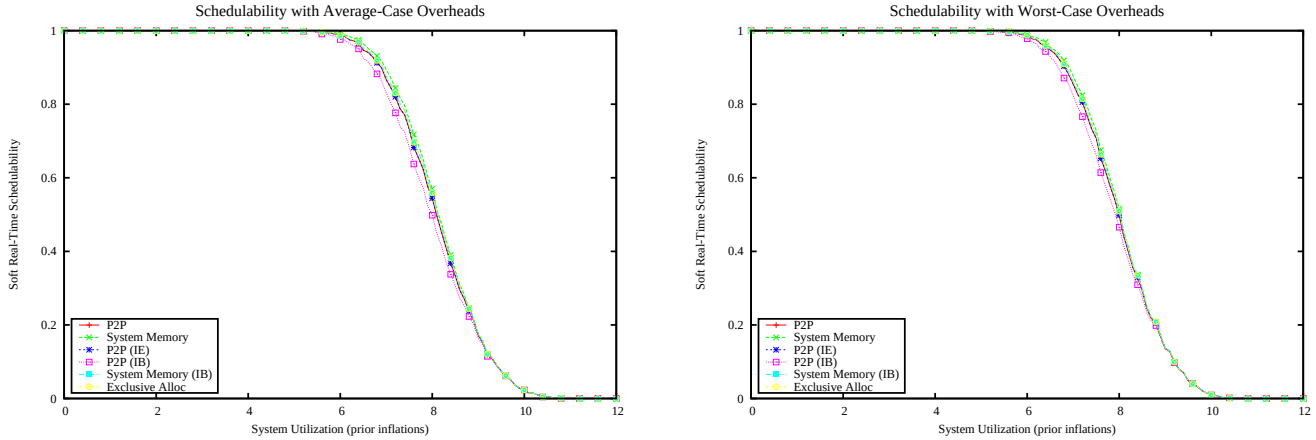

Figure 3268: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

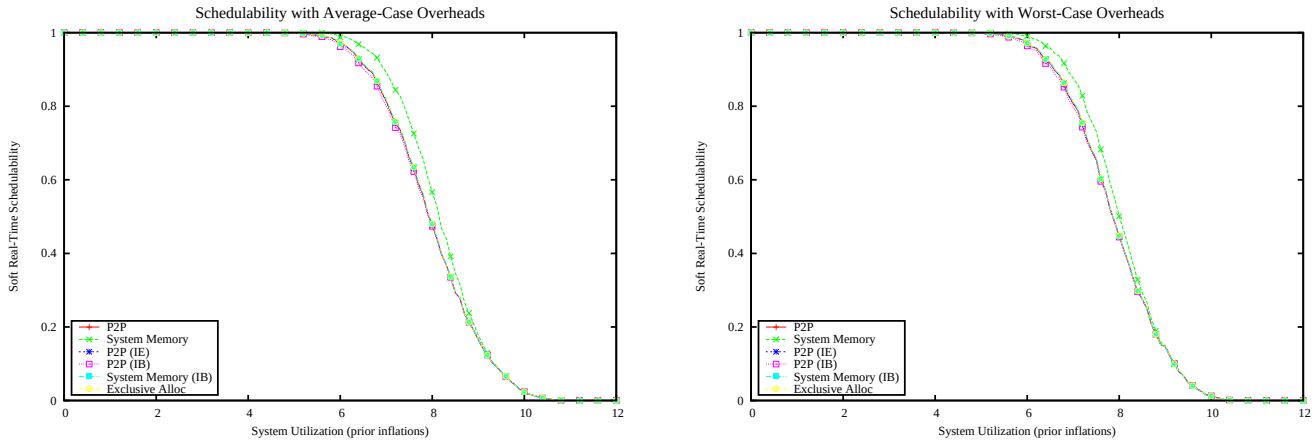

Figure 3269: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

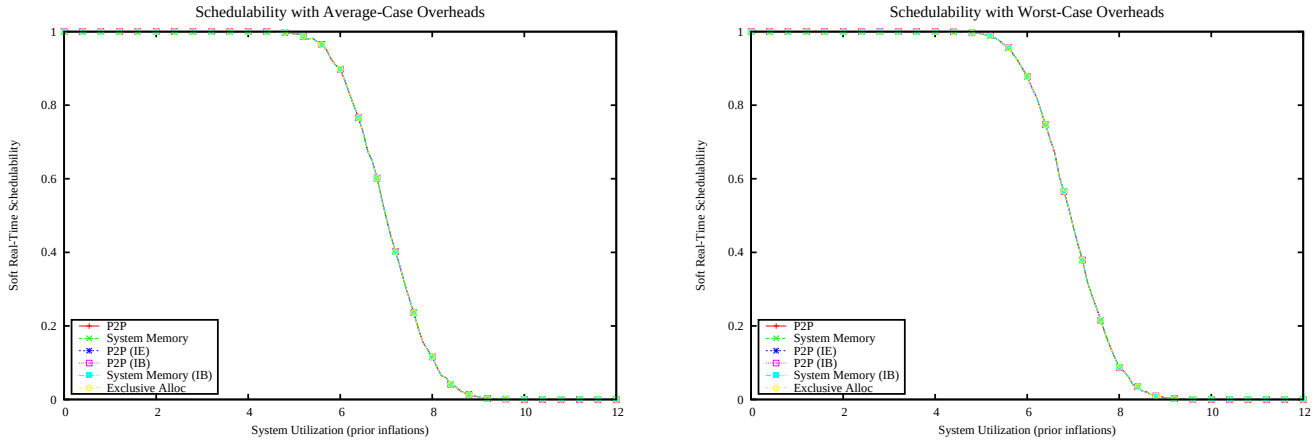

Figure 3270: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

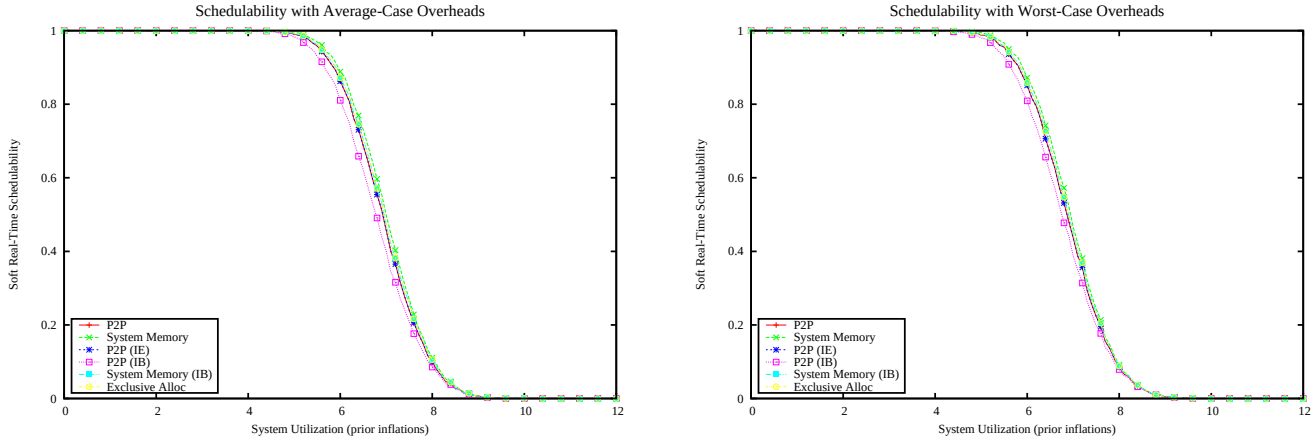

Figure 3271: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

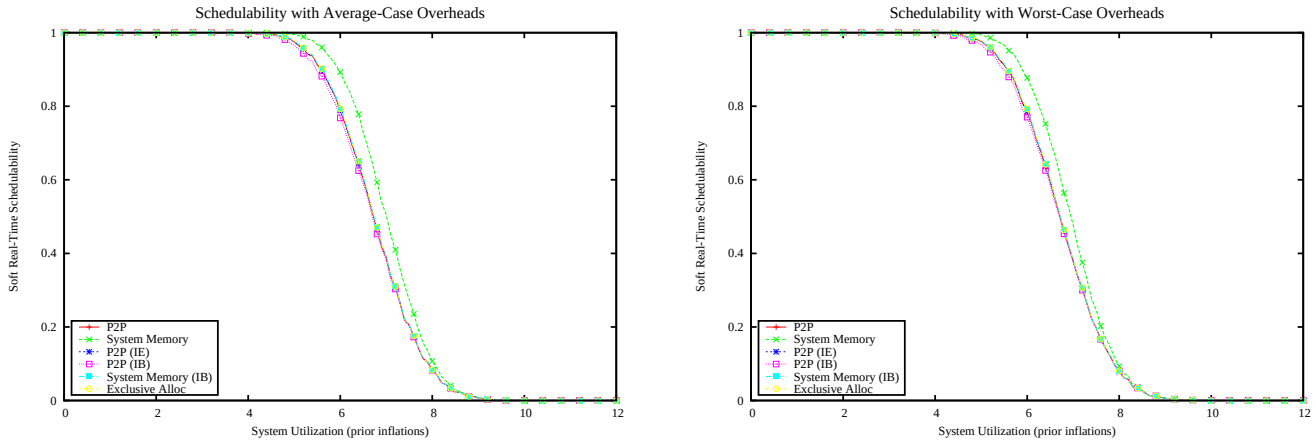

Figure 3272: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

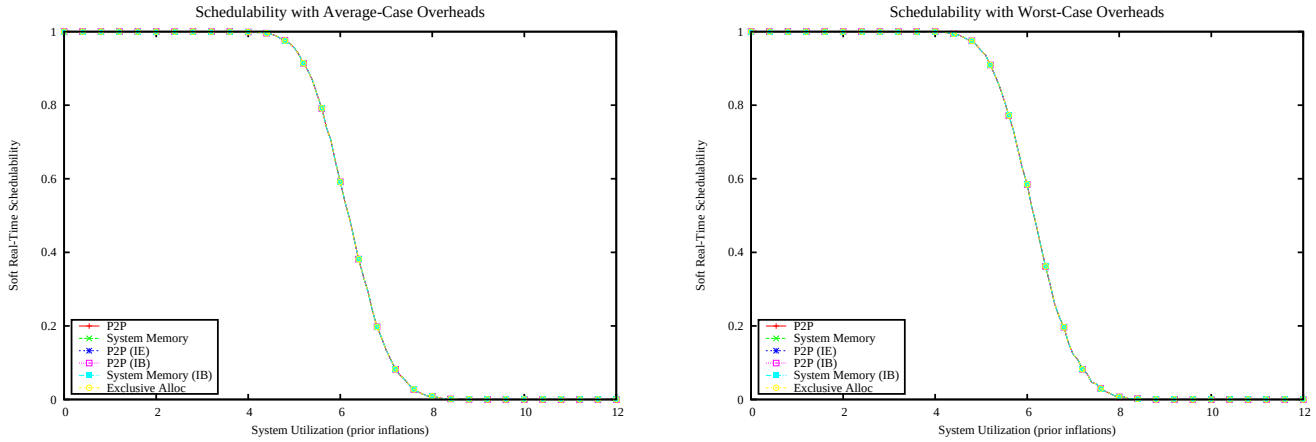

Figure 3273: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

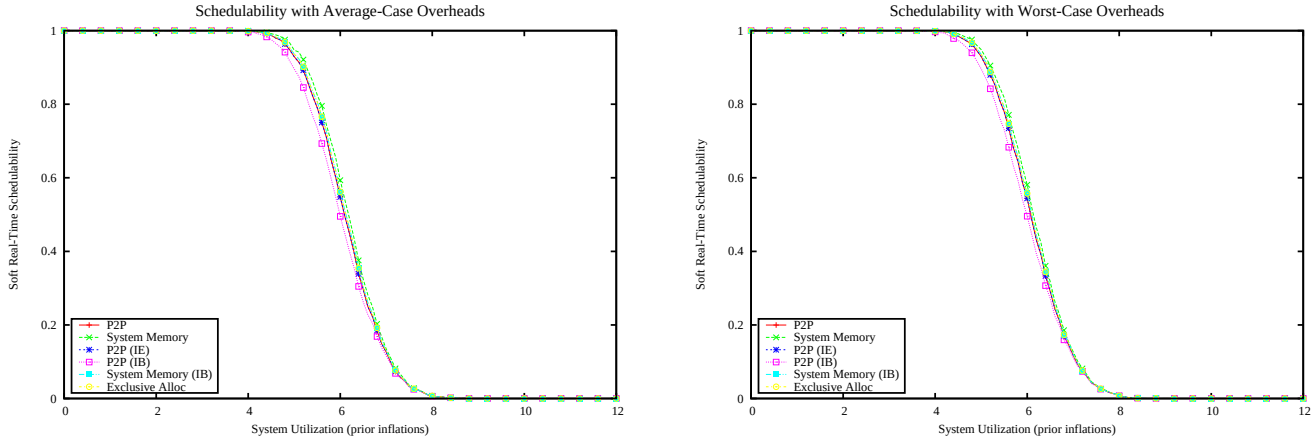

Figure 3274: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

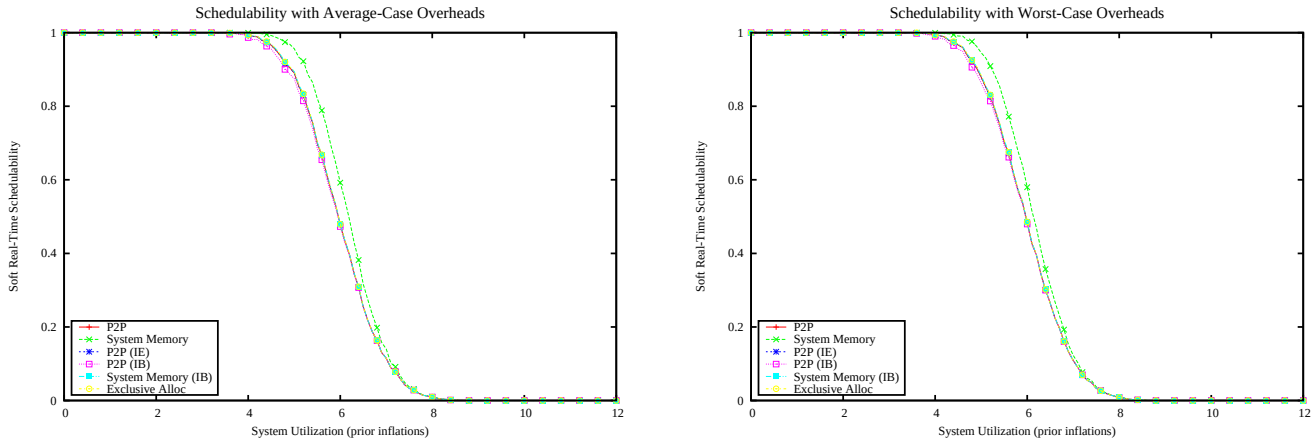

Figure 3275: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

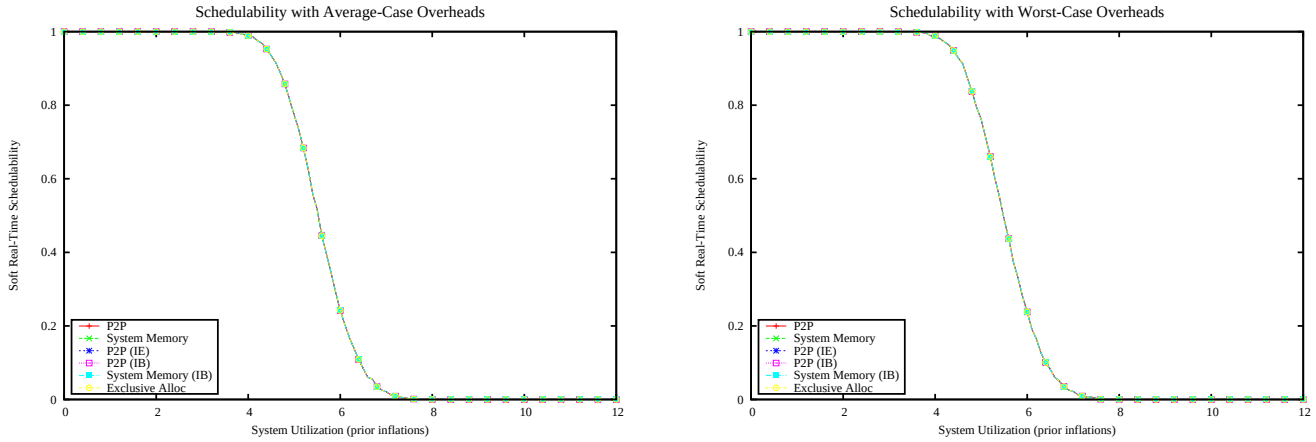

Figure 3276: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

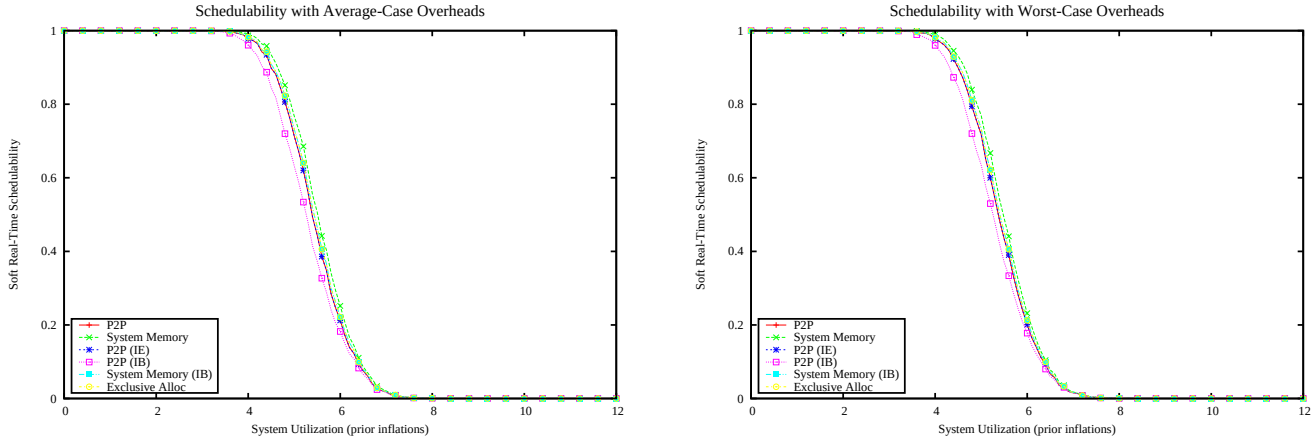

Figure 3277: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

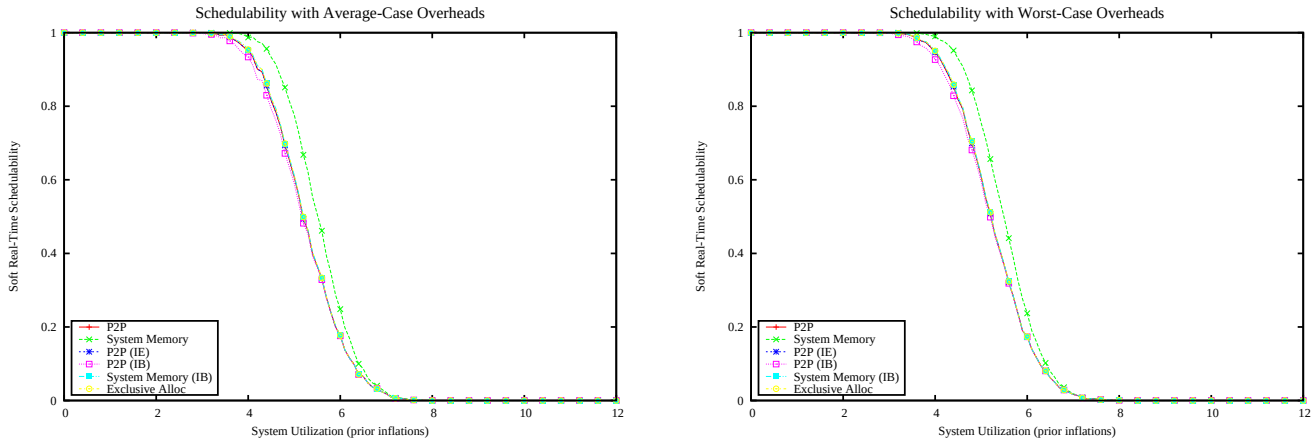

Figure 3278: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

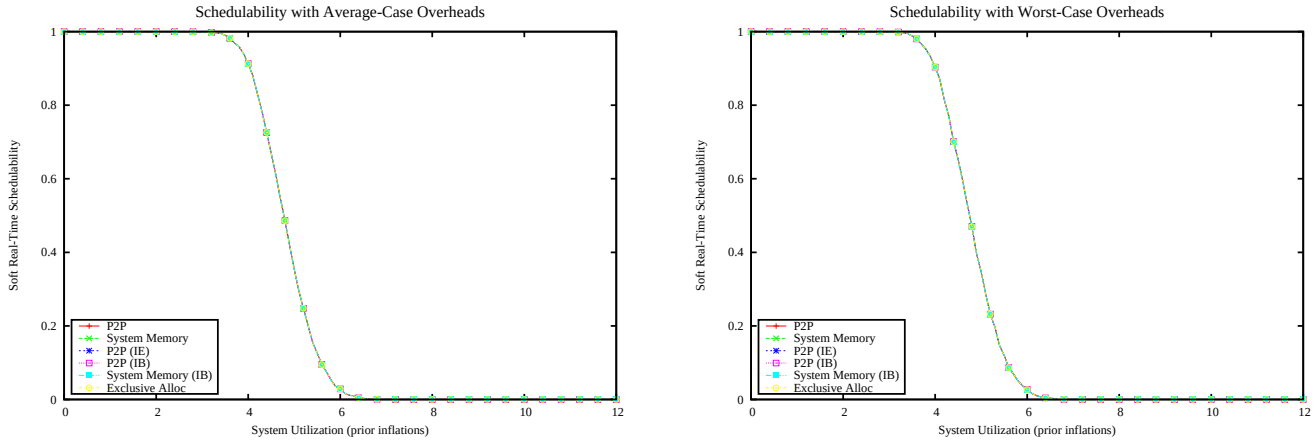

Figure 3279: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

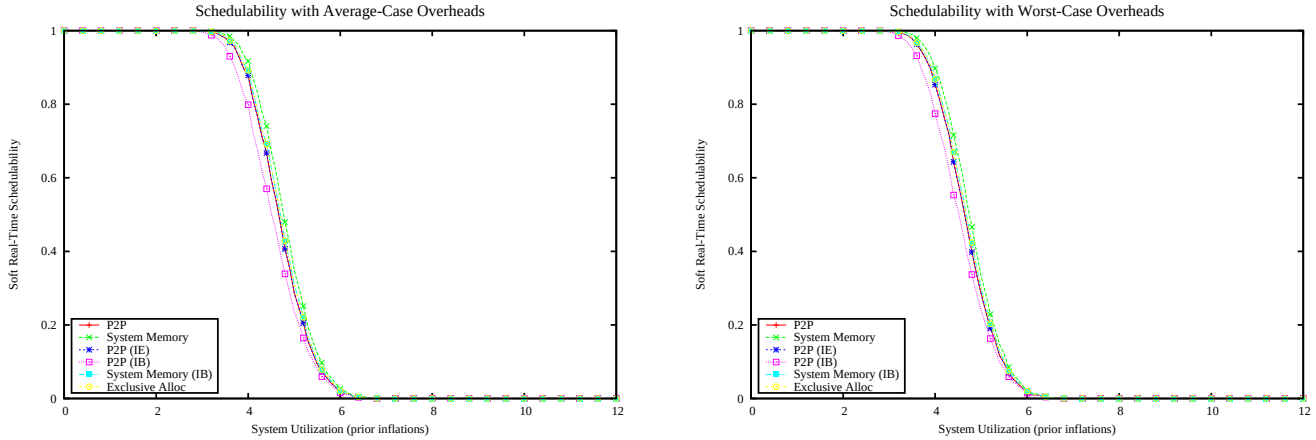

Figure 3280: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

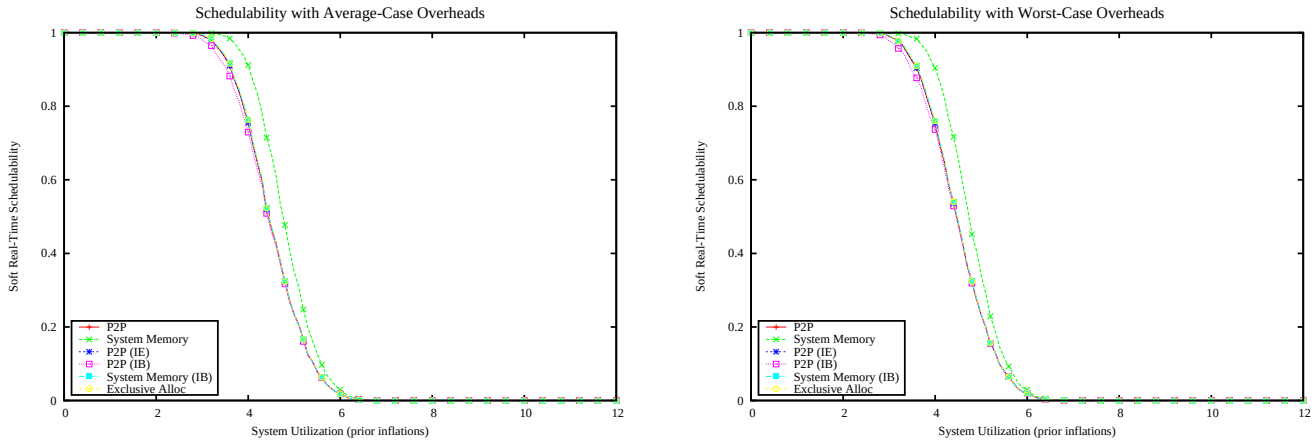

Figure 3281: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

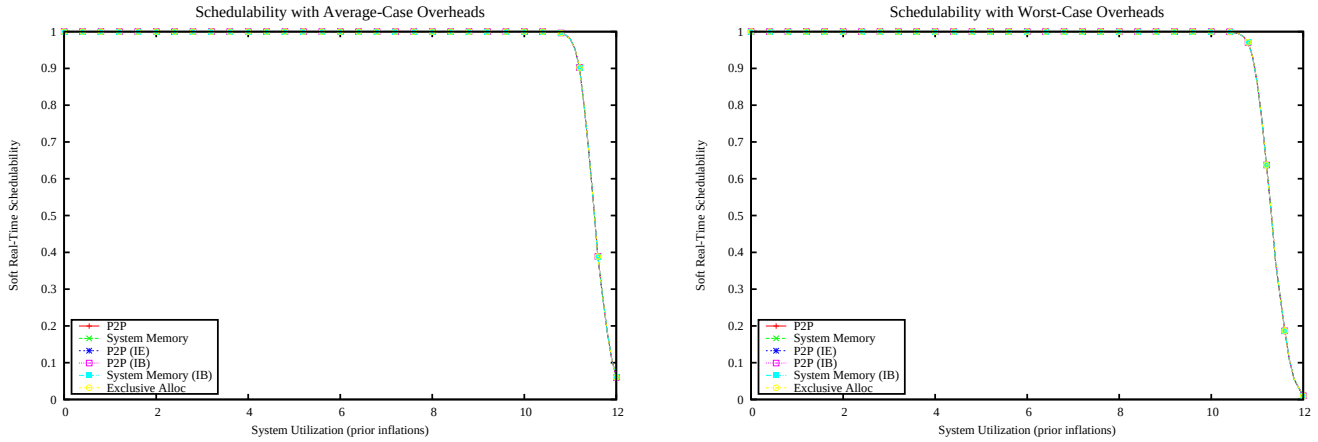

Figure 3282: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

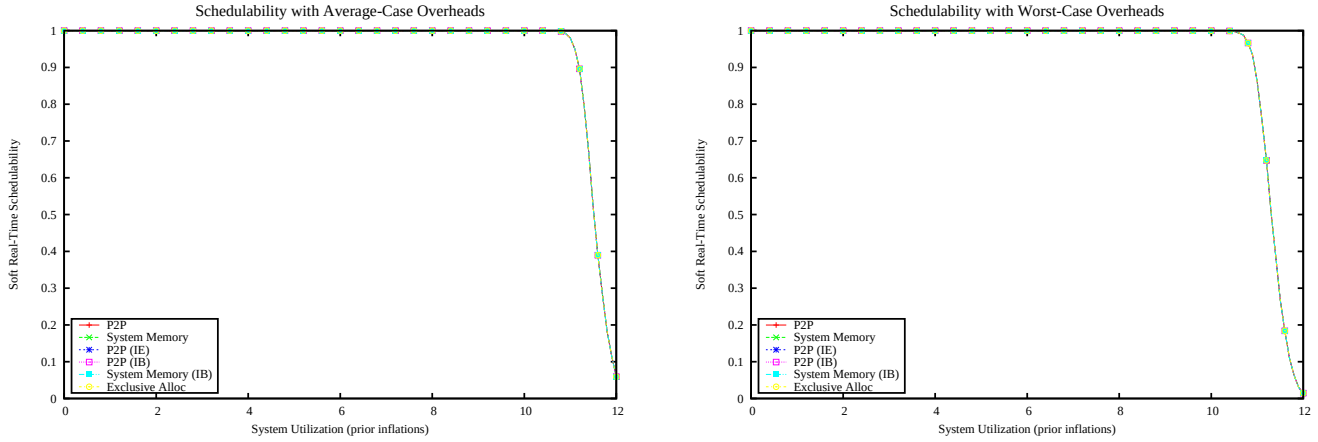

Figure 3283: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

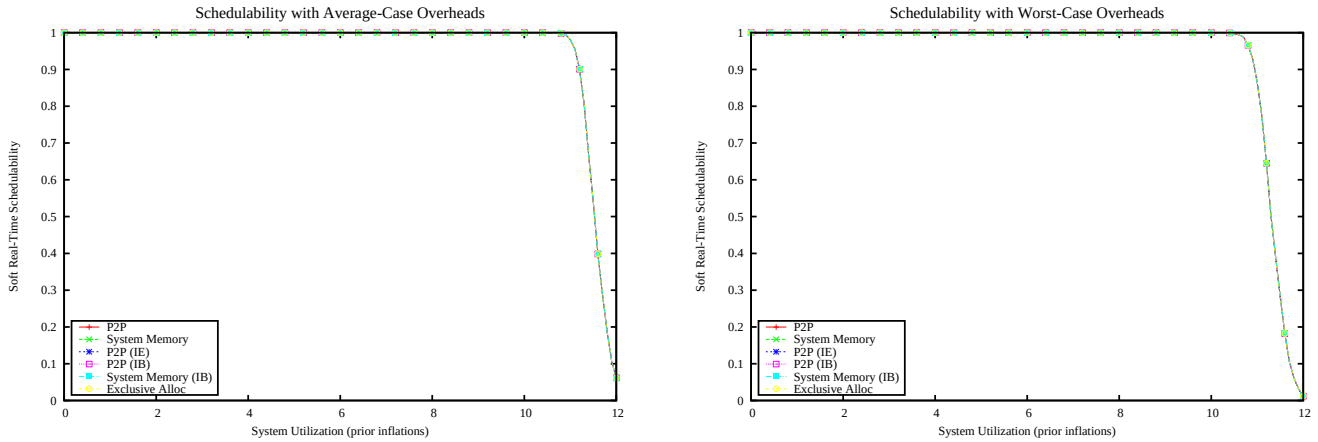

Figure 3284: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

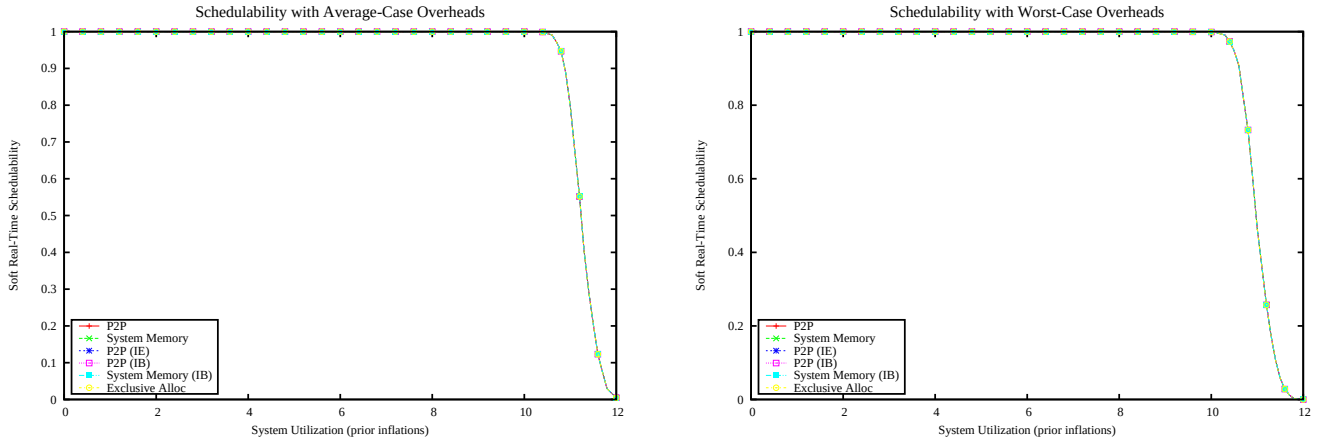

Figure 3285: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

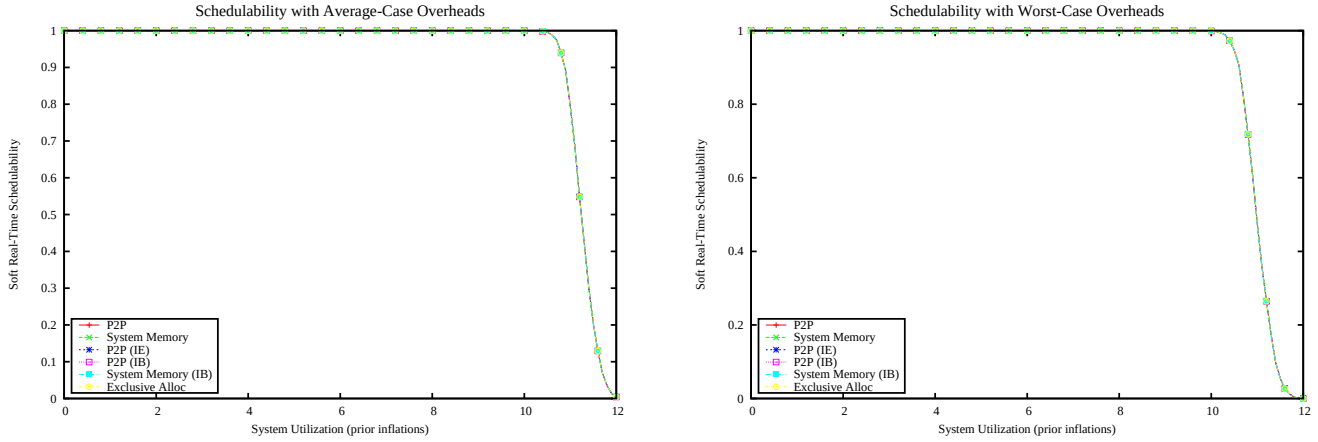

Figure 3286: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

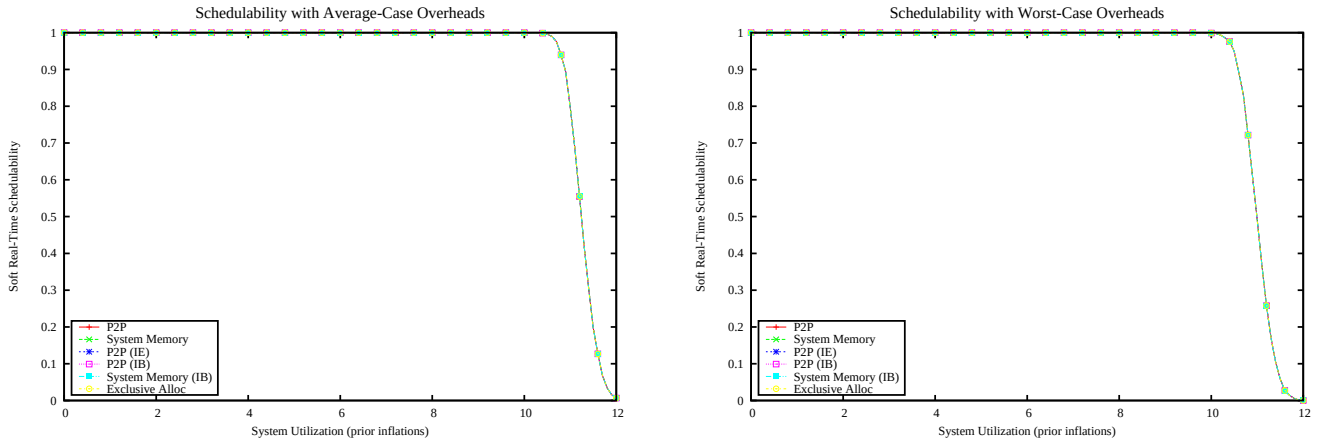

Figure 3287: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

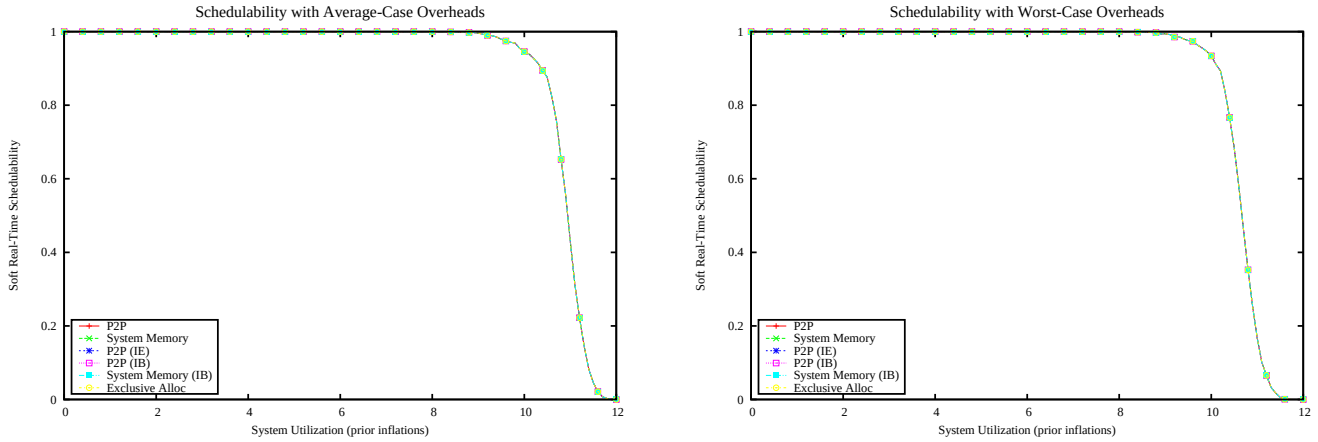

Figure 3288: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

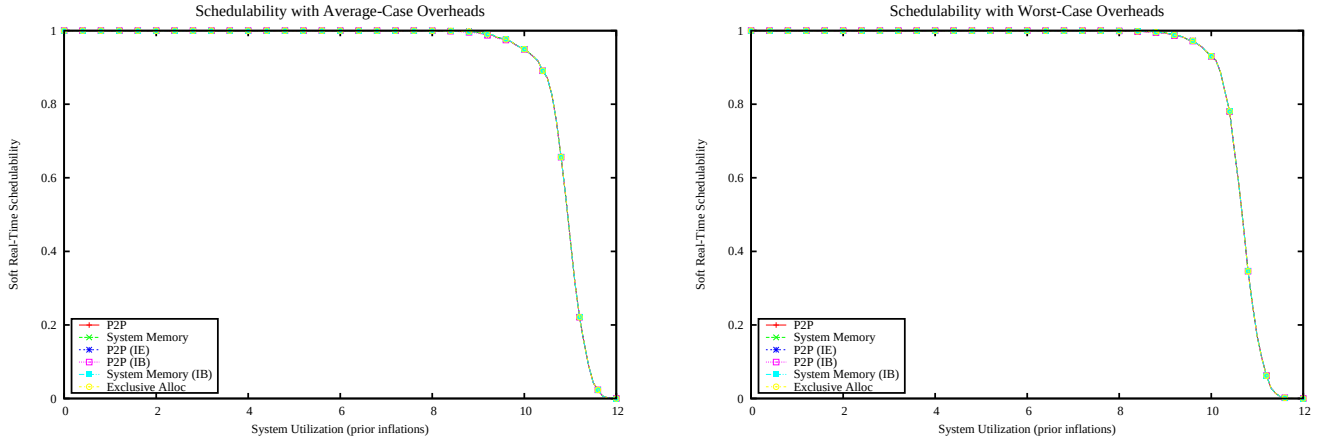

Figure 3289: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

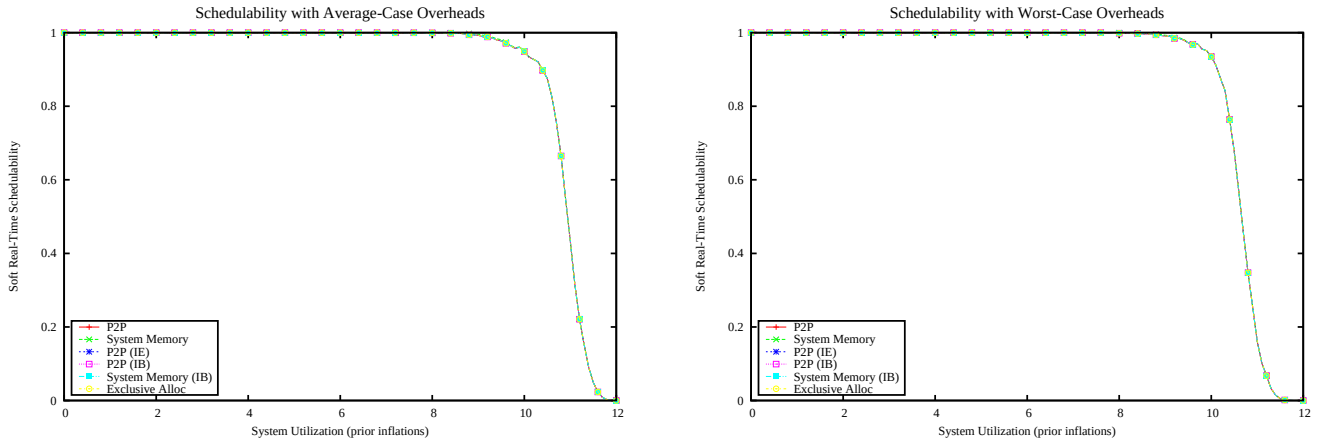

Figure 3290: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

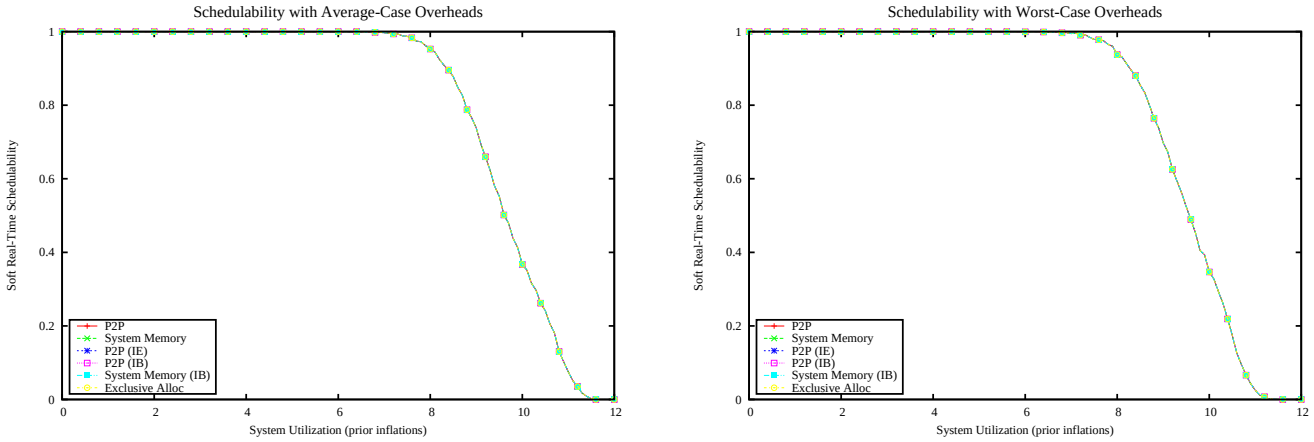

Figure 3291: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

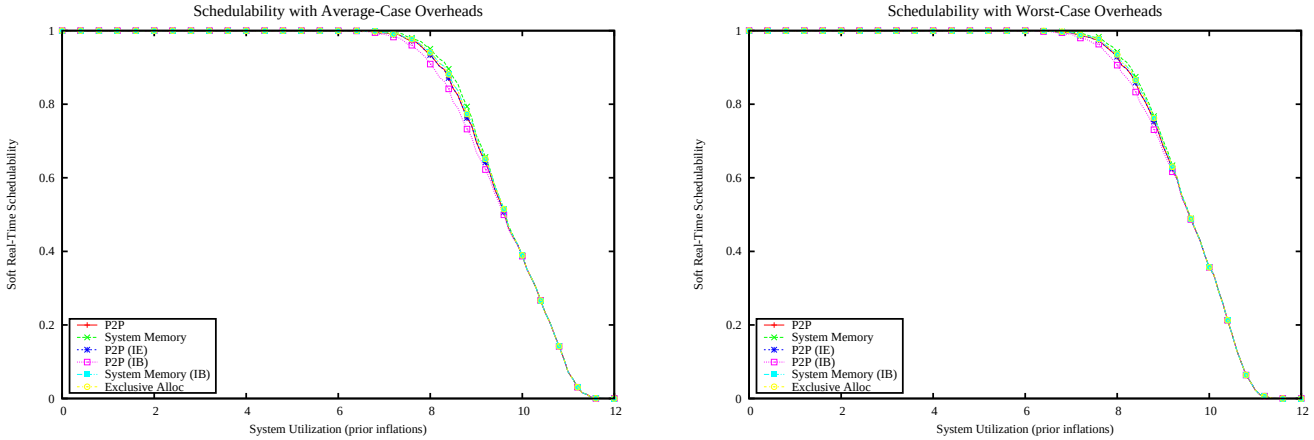

Figure 3292: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

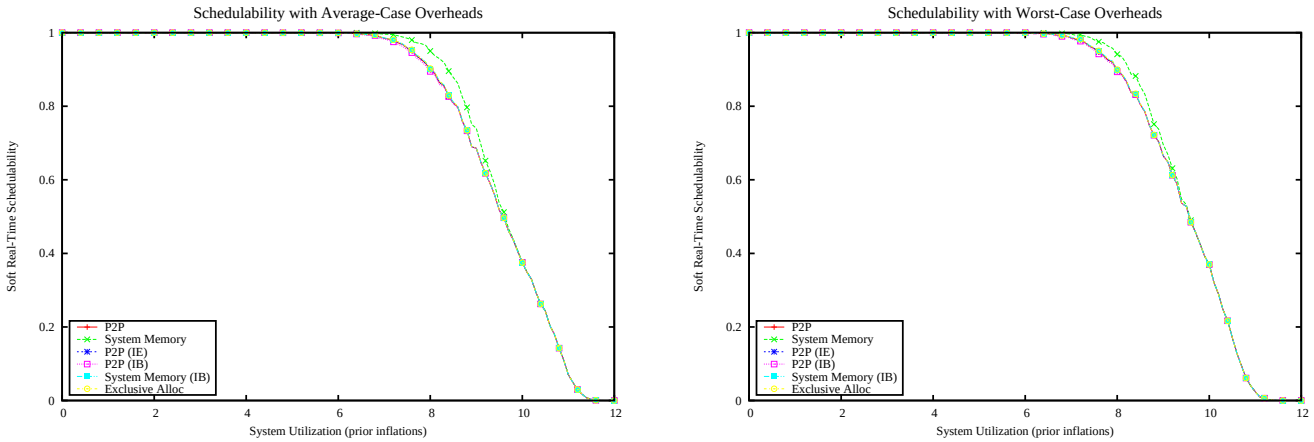

Figure 3293: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

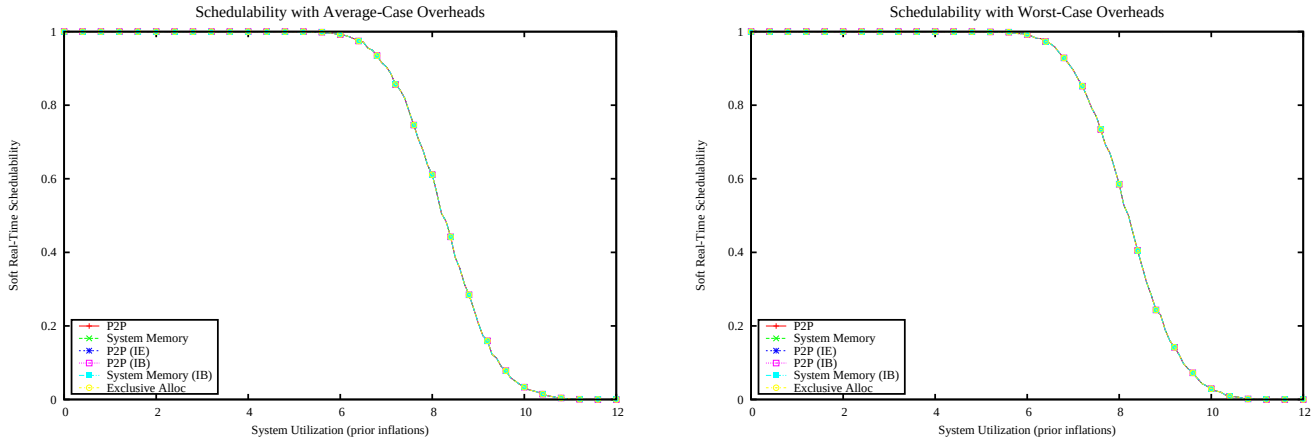

Figure 3294: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

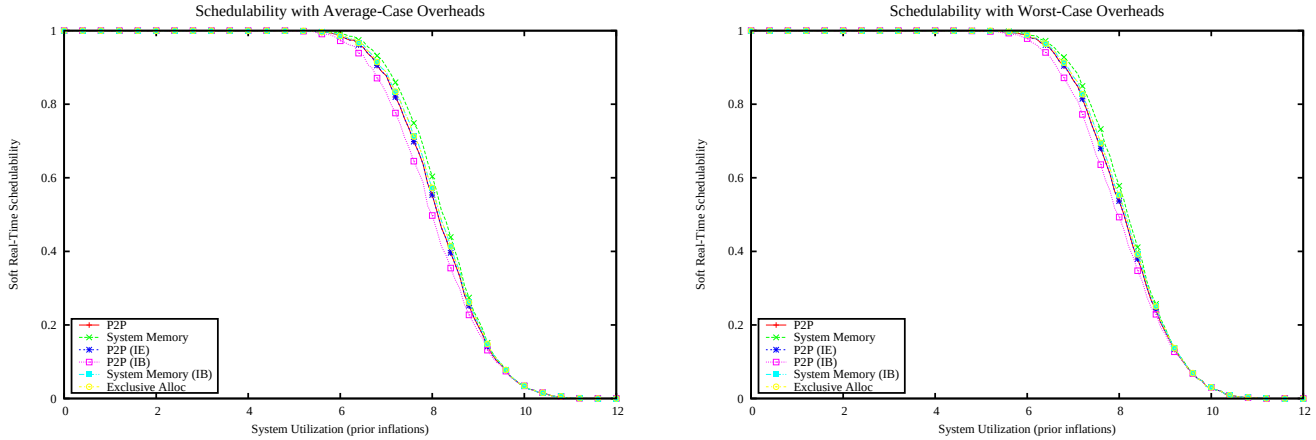

Figure 3295: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

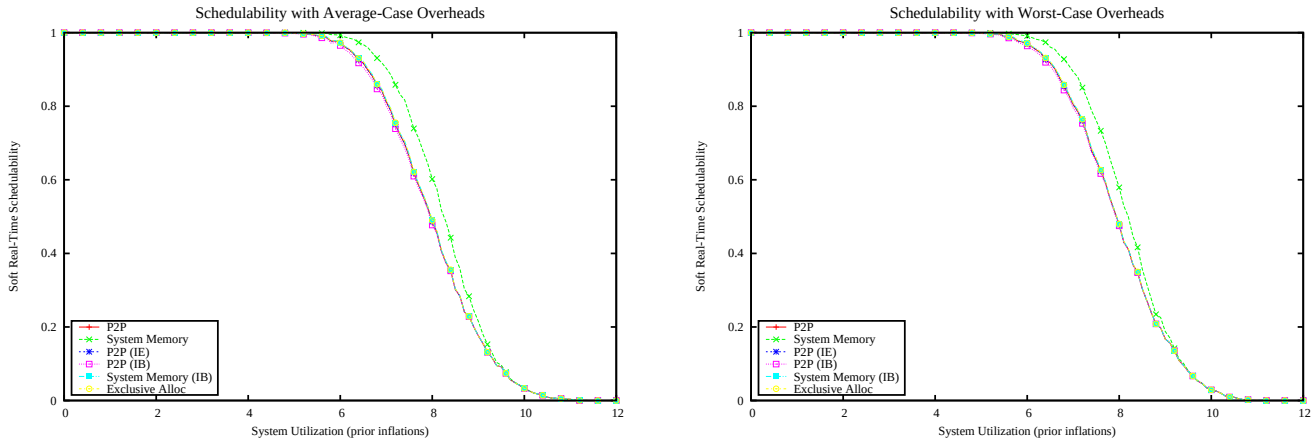

Figure 3296: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

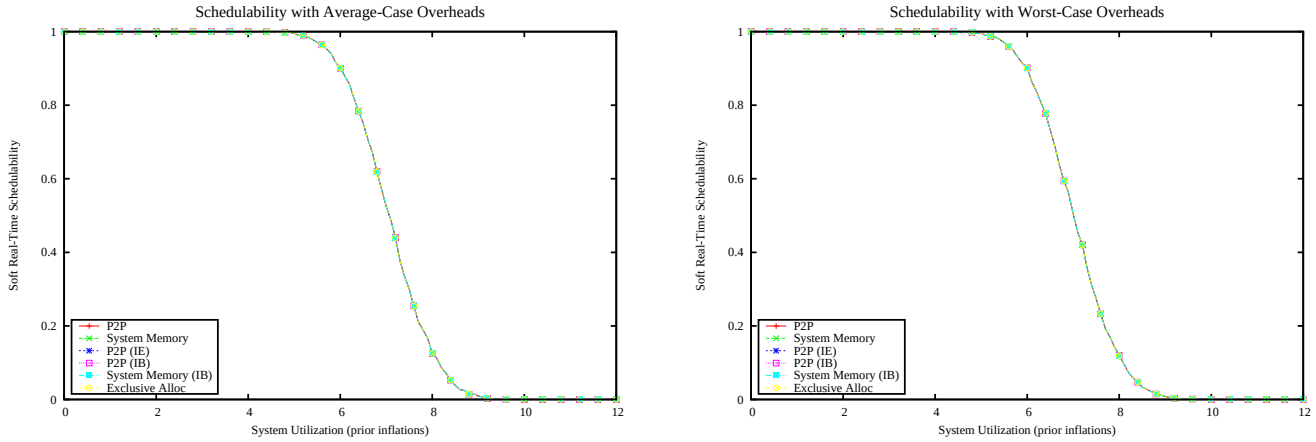

Figure 3297: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

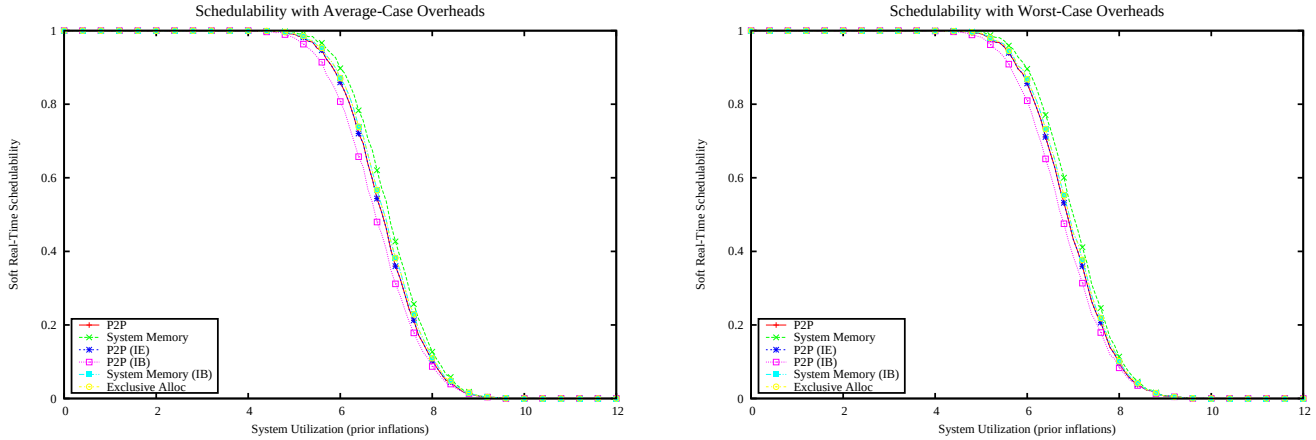

Figure 3298: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

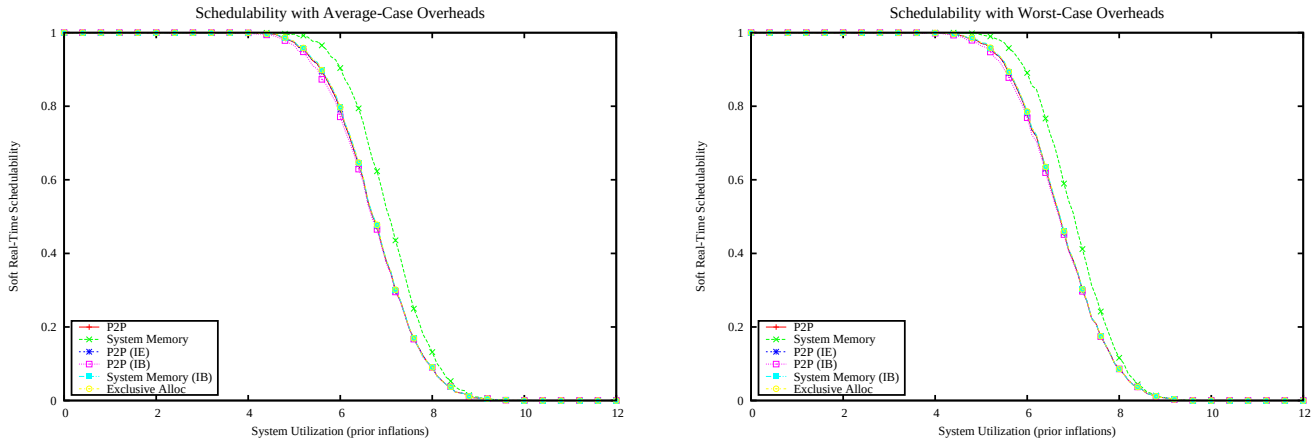

Figure 3299: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

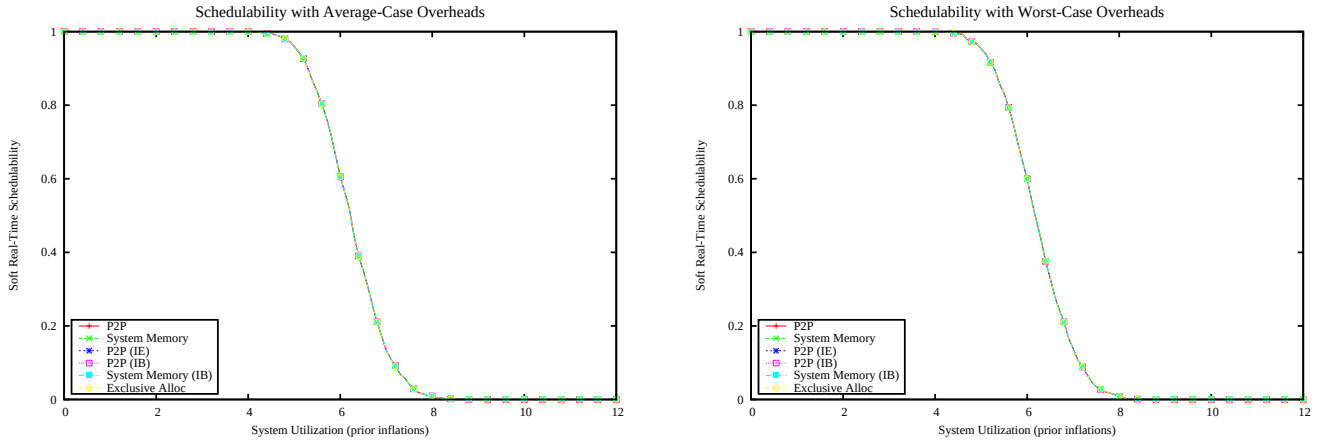

Figure 3300: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

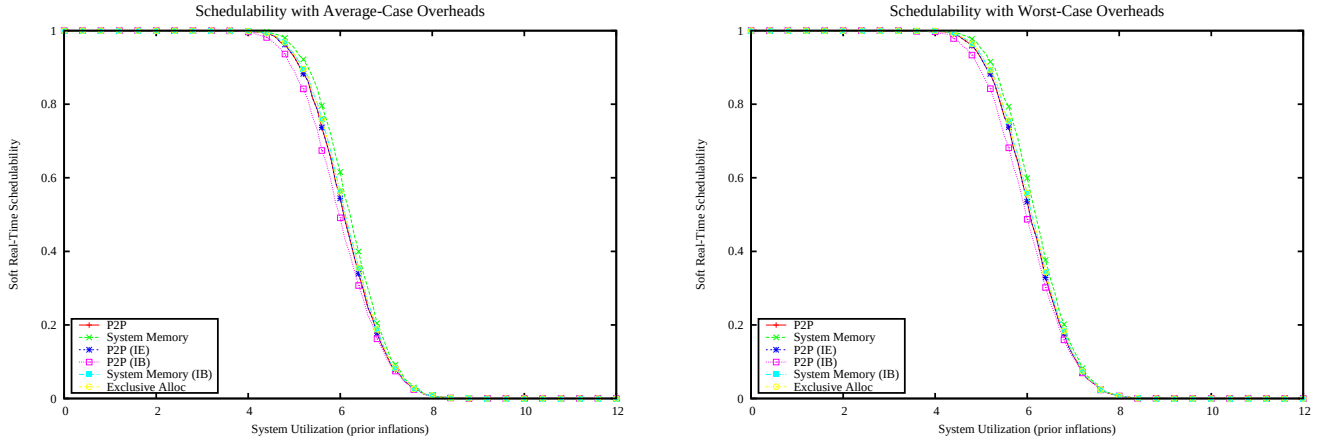

Figure 3301: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

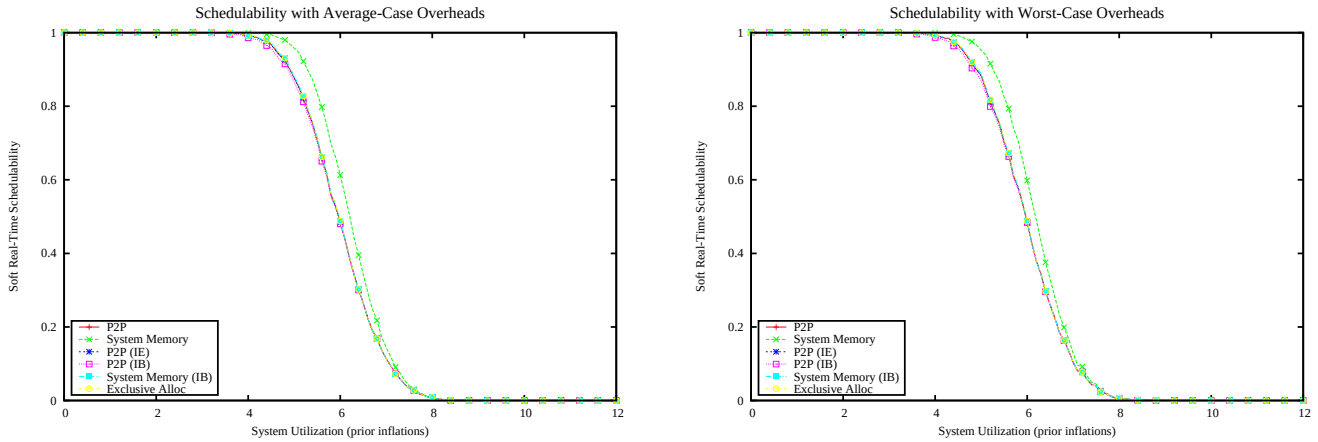

Figure 3302: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

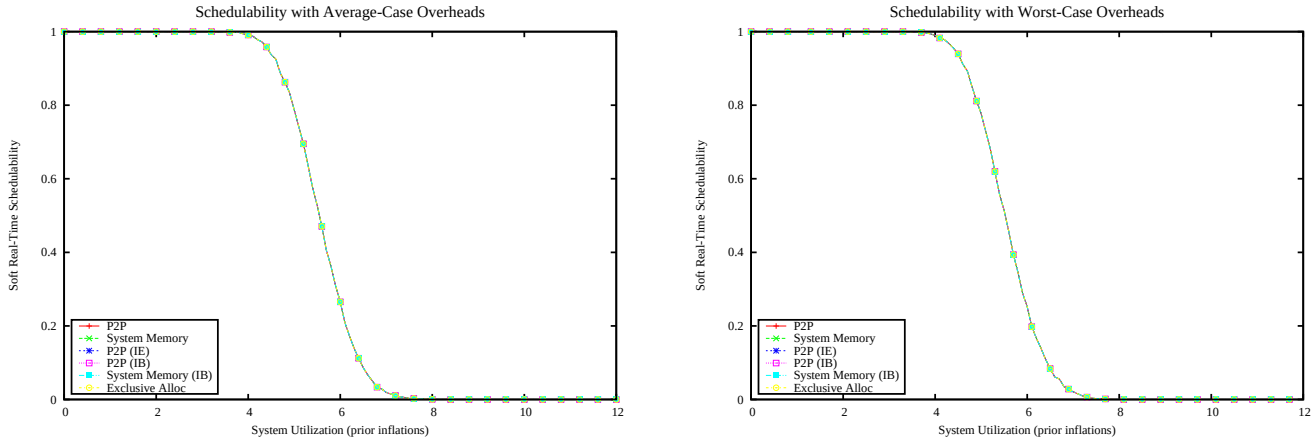

Figure 3303: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

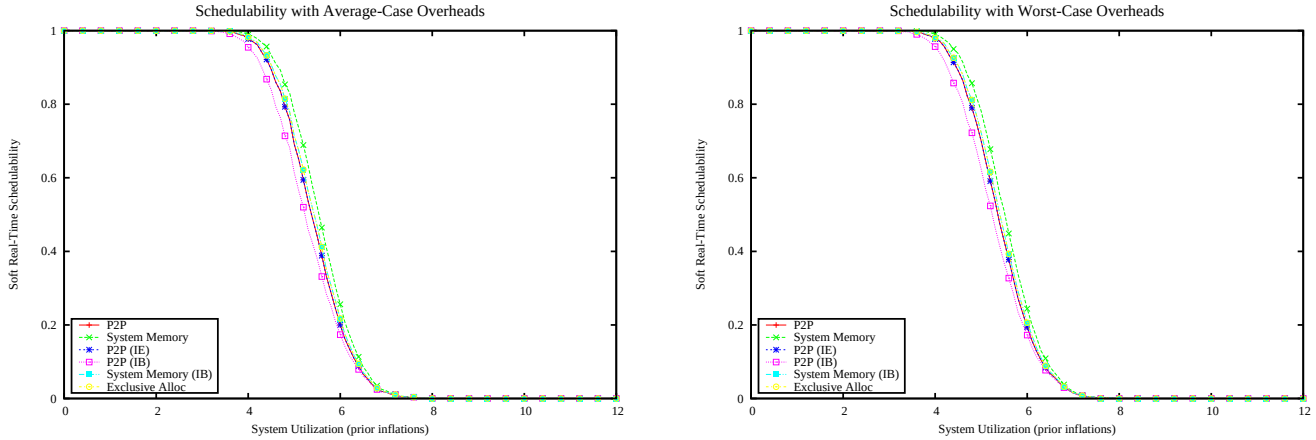

Figure 3304: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

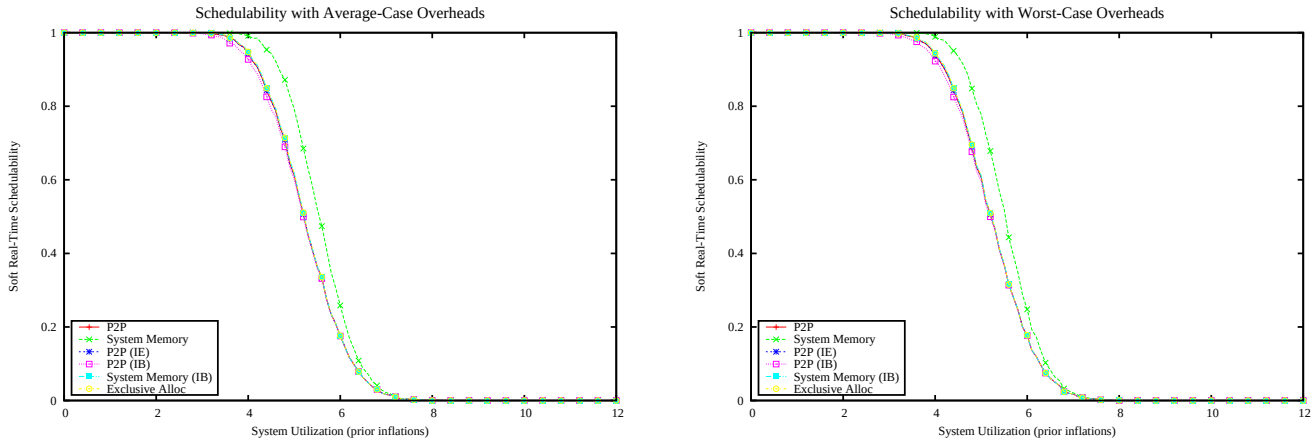

Figure 3305: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

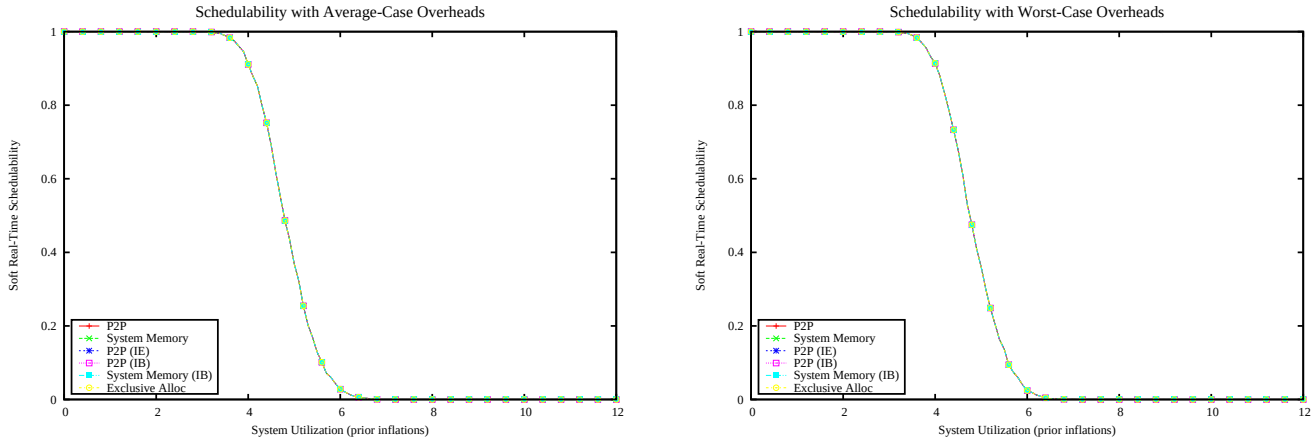

Figure 3306: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

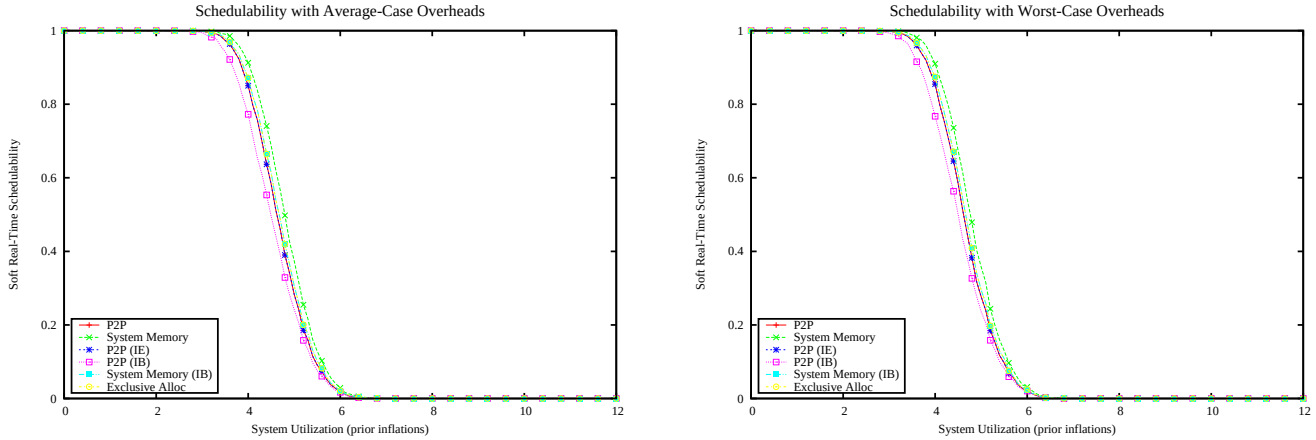

Figure 3307: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

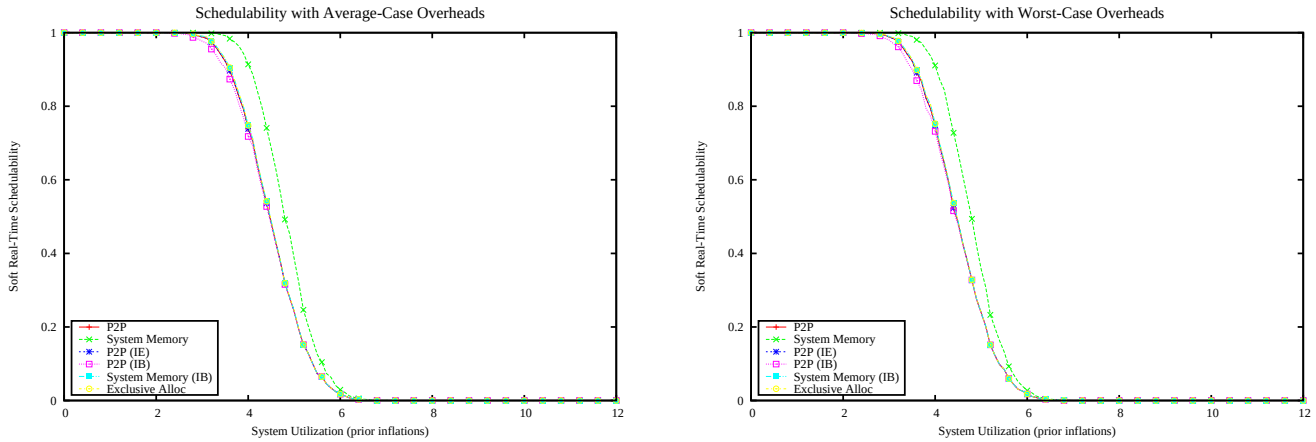

Figure 3308: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

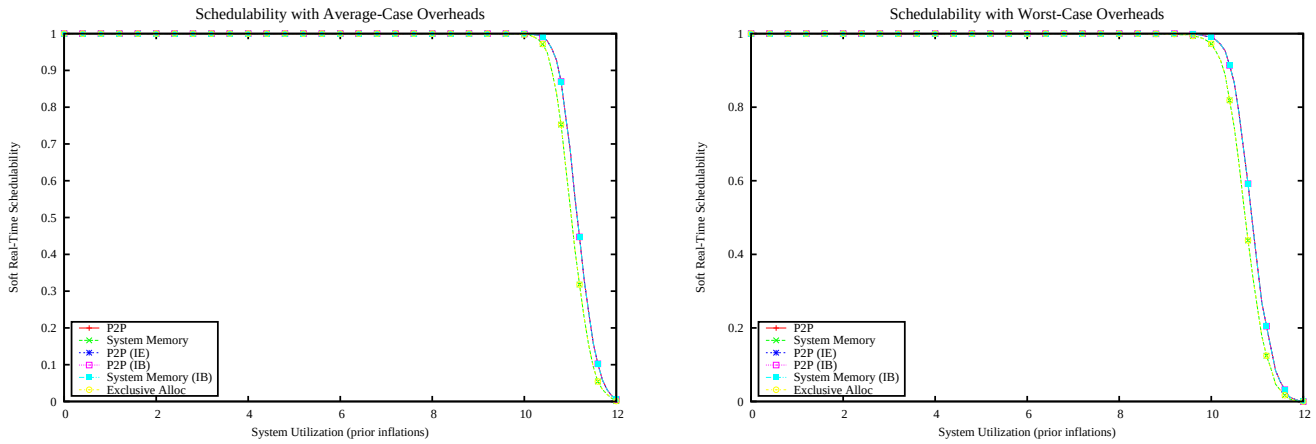

Figure 3309: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

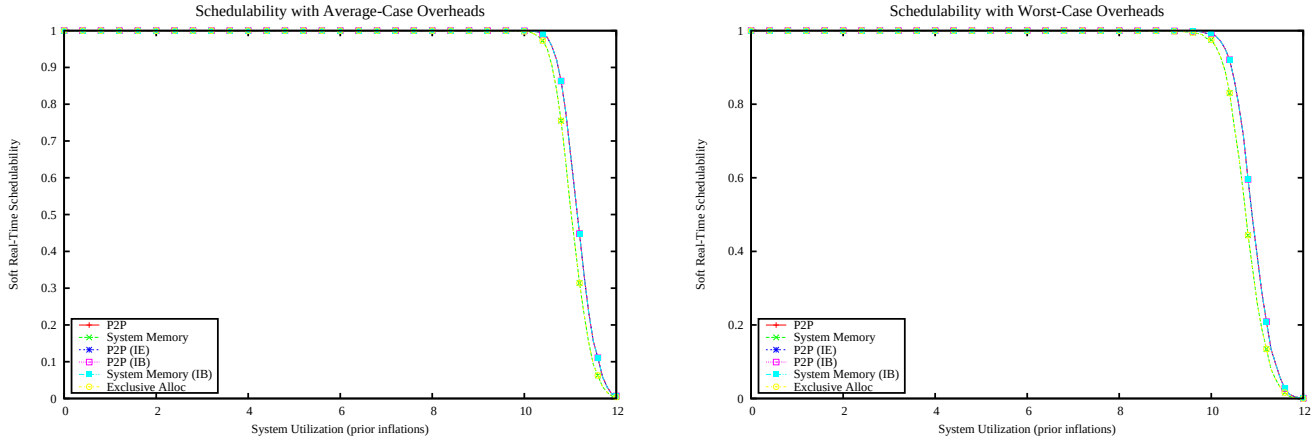

Figure 3310: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

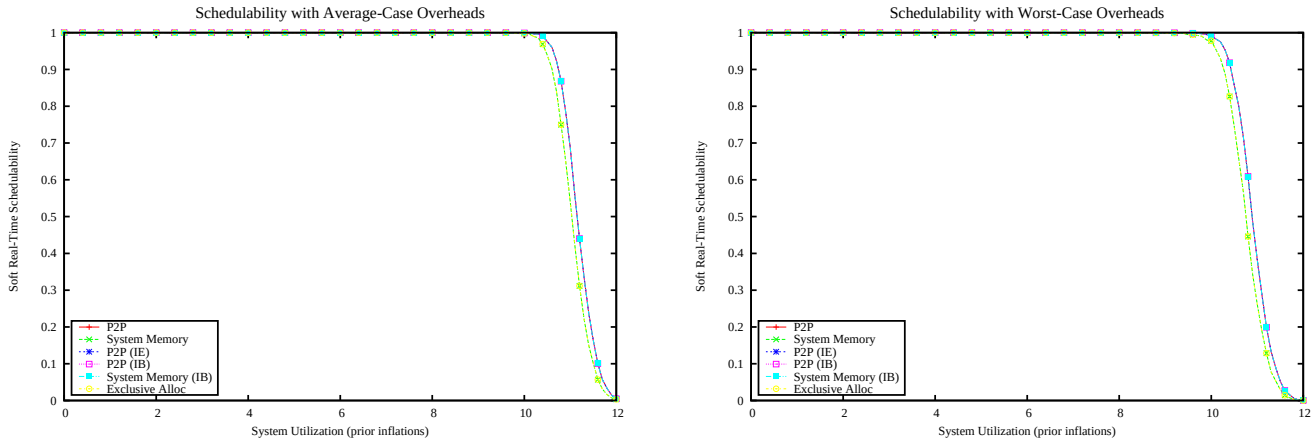

Figure 3311: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

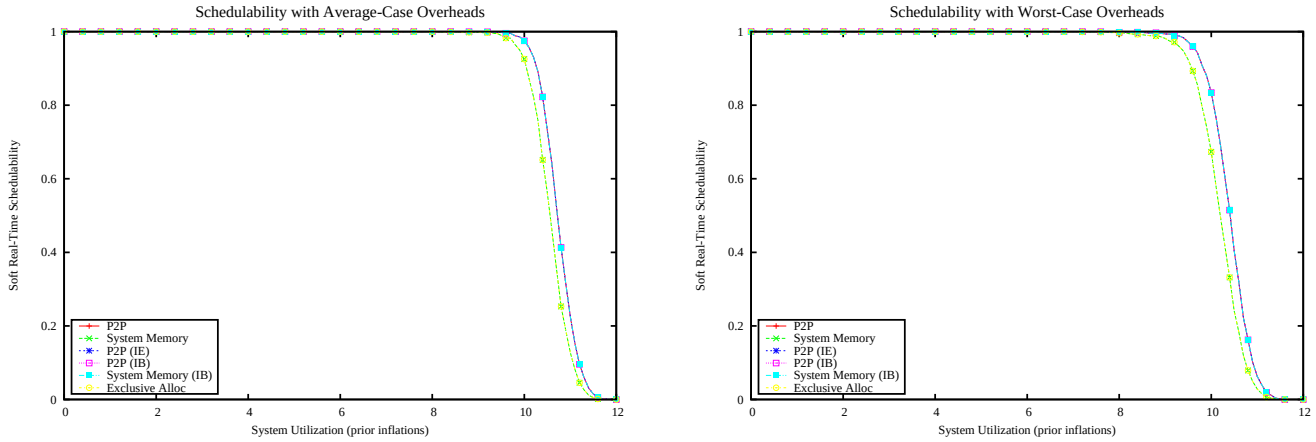

Figure 3312: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

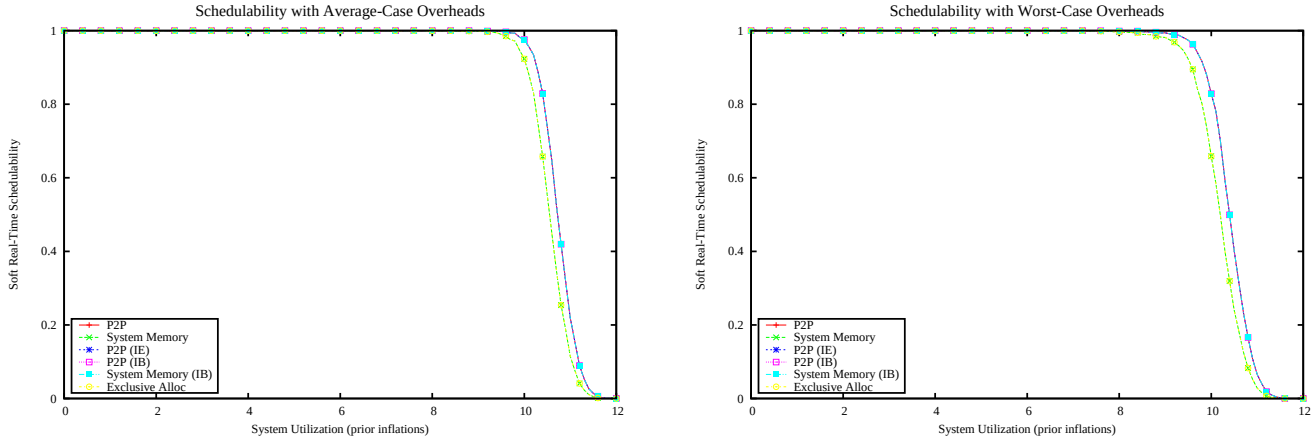

Figure 3313: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

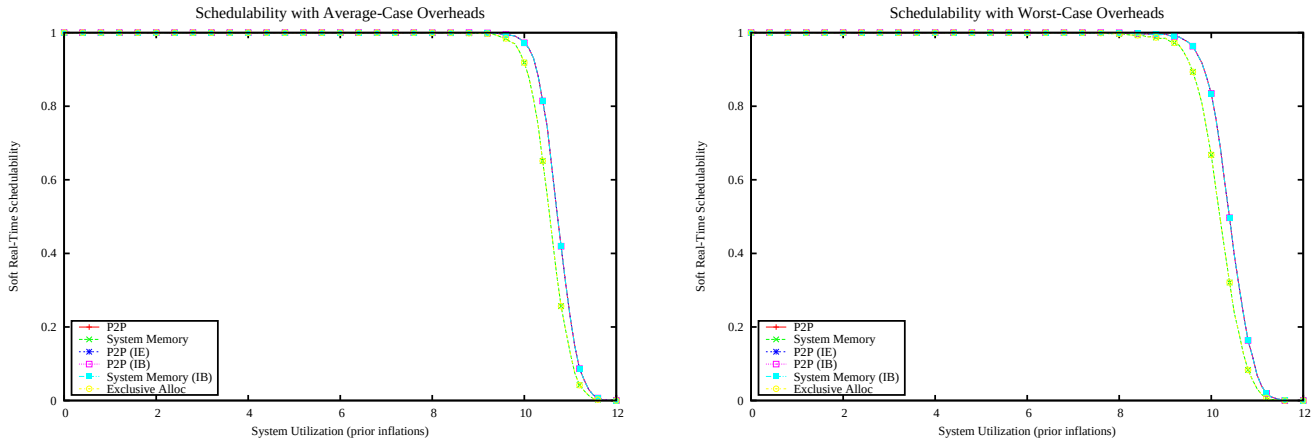

Figure 3314: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

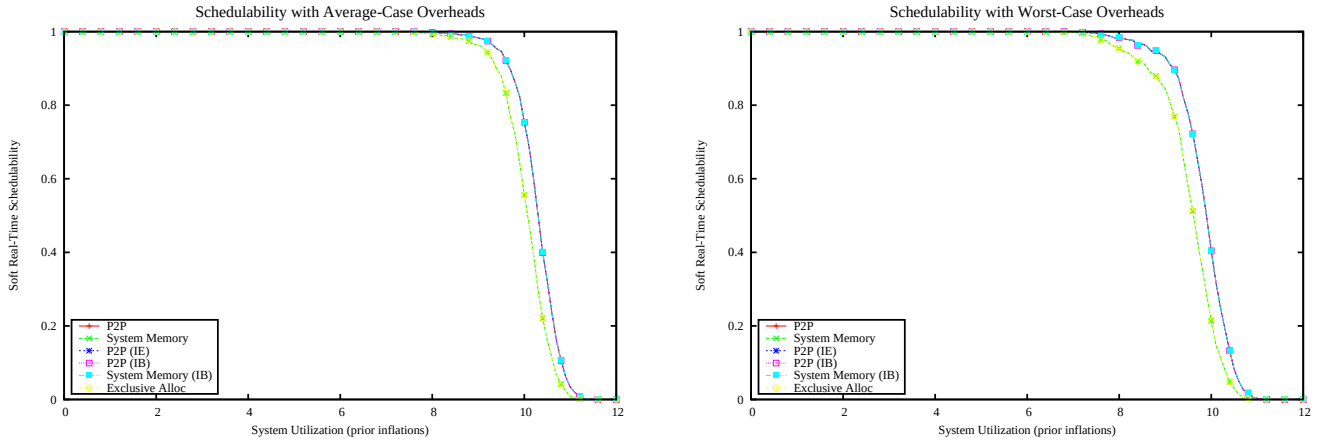

Figure 3315: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

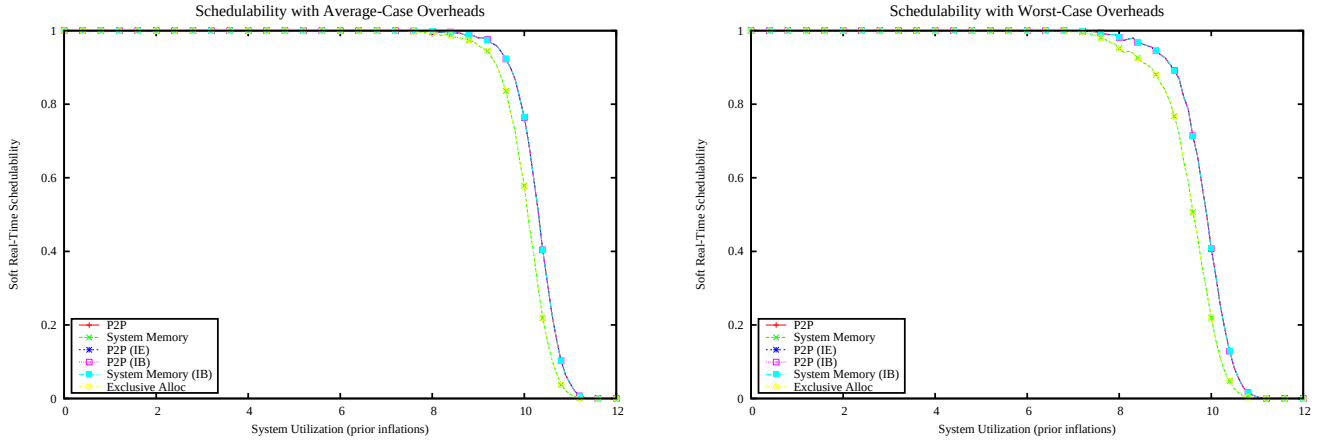

Figure 3316: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

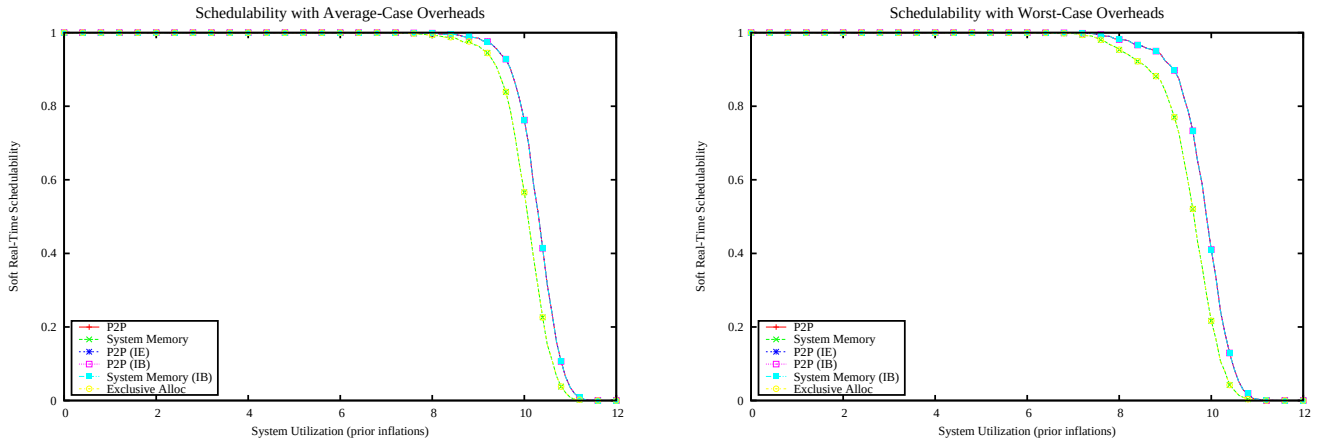

Figure 3317: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

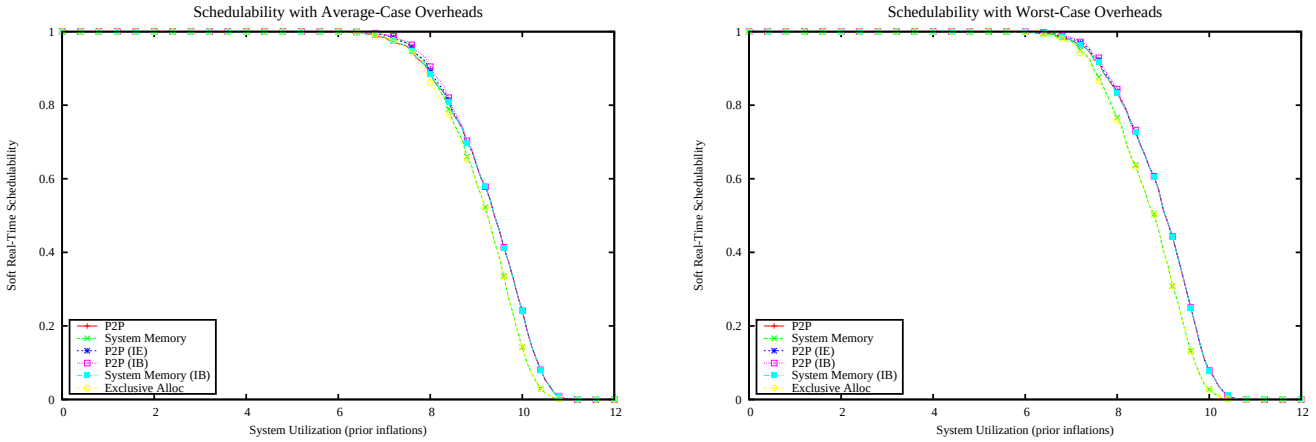

Figure 3318: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

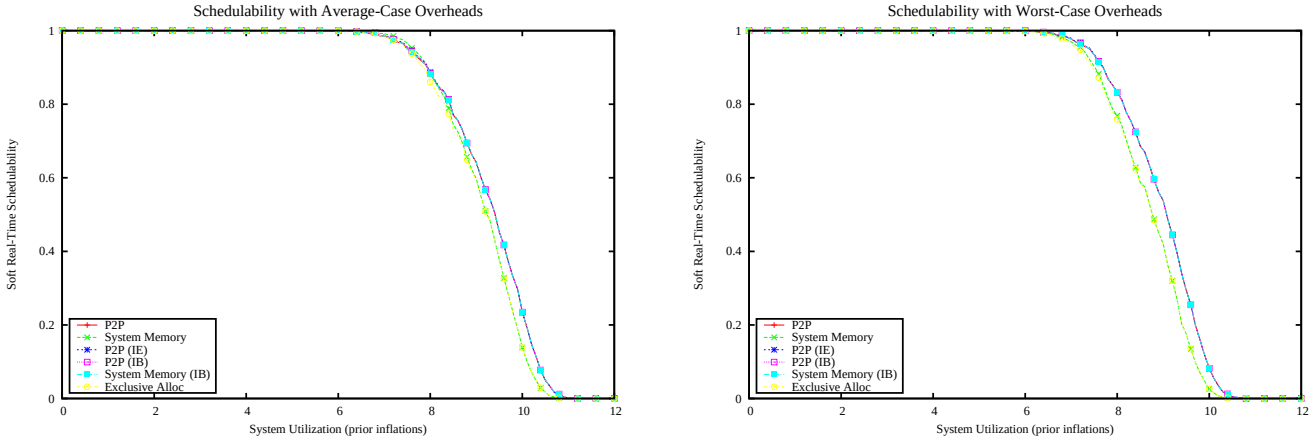

Figure 3319: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

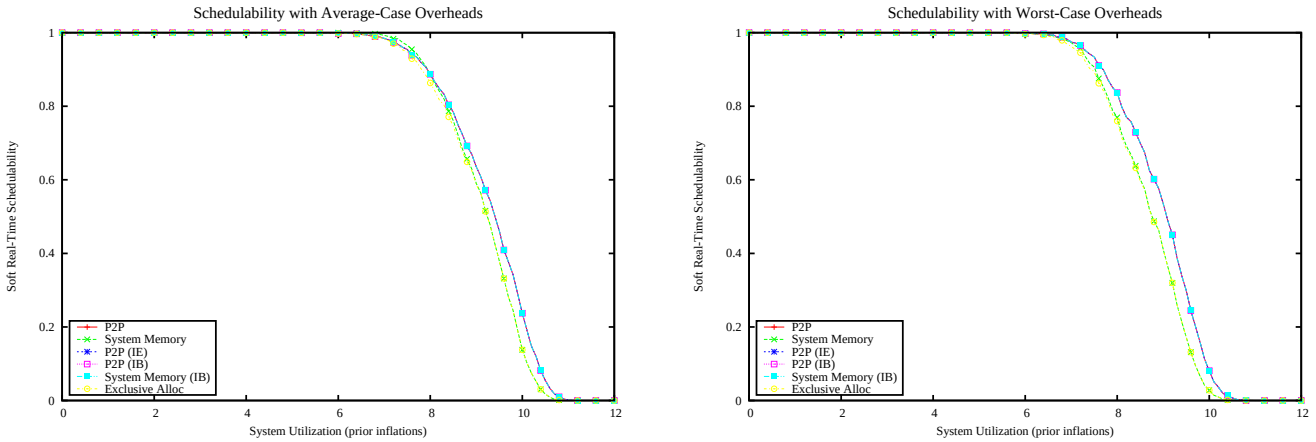

Figure 3320: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

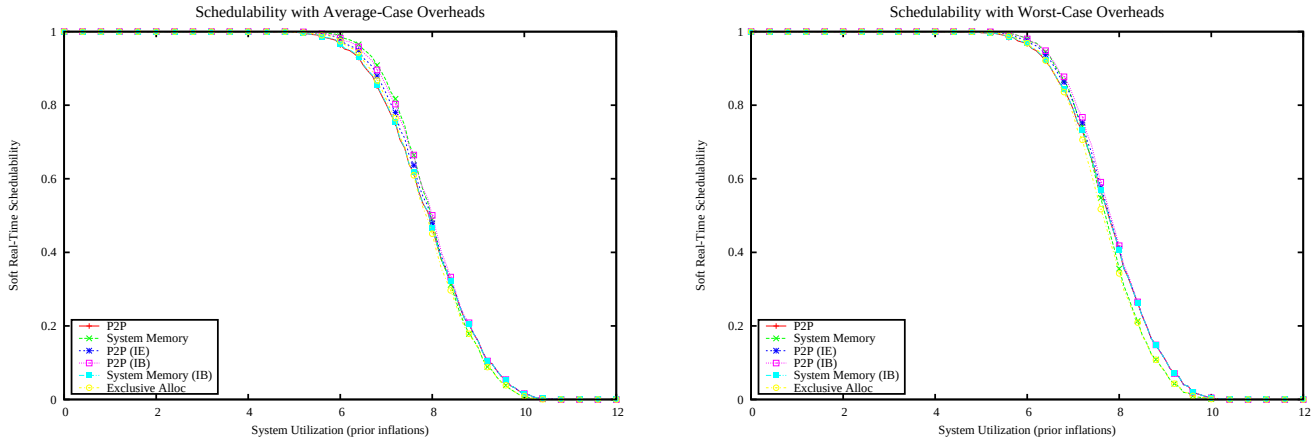

Figure 3321: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

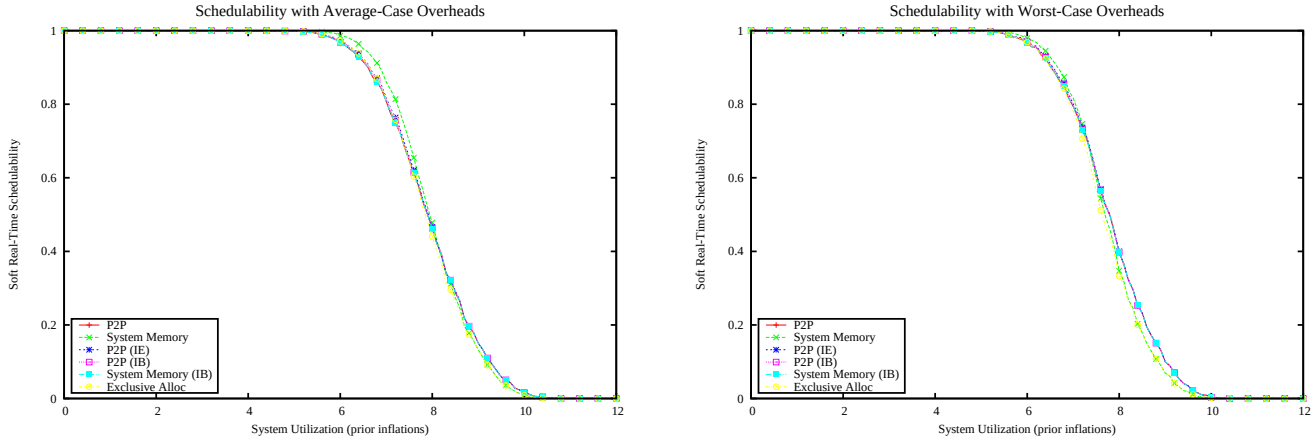

Figure 3322: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

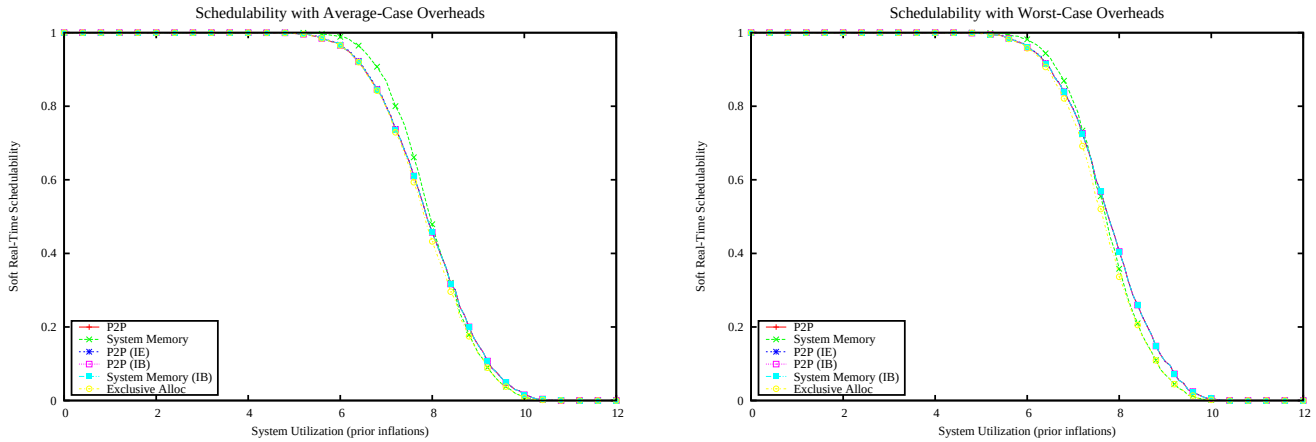

Figure 3323: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

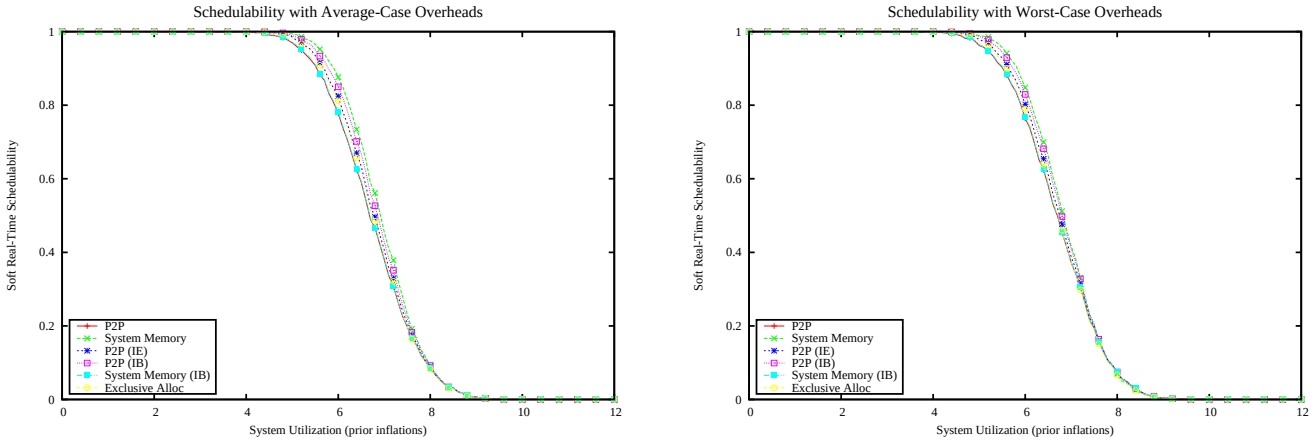

Figure 3324: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

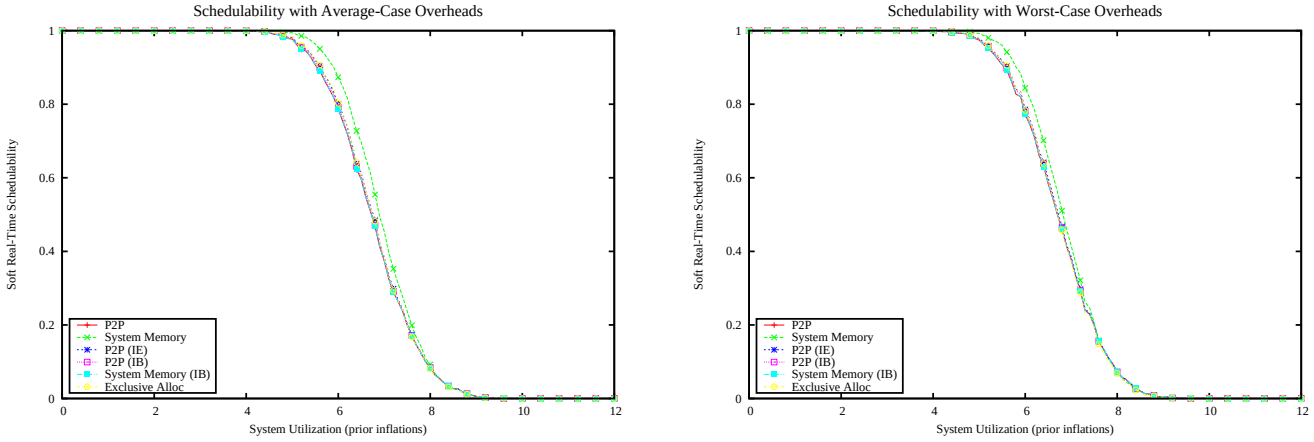

Figure 3325: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

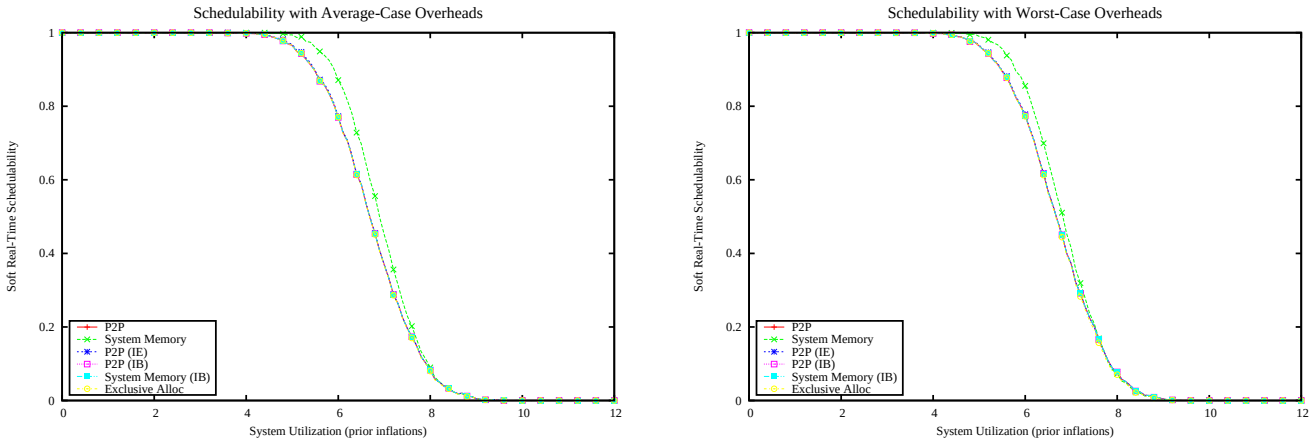

Figure 3326: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

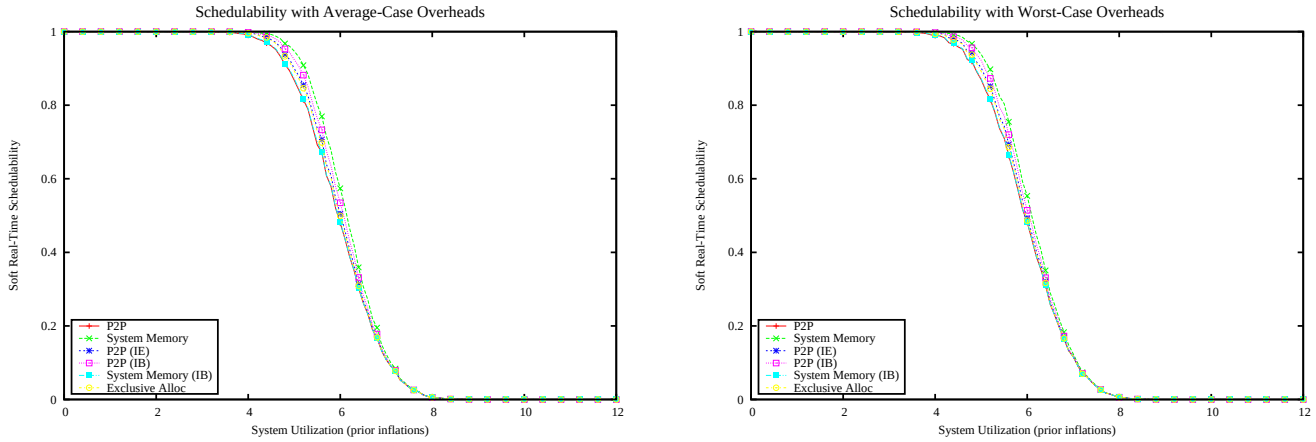

Figure 3327: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

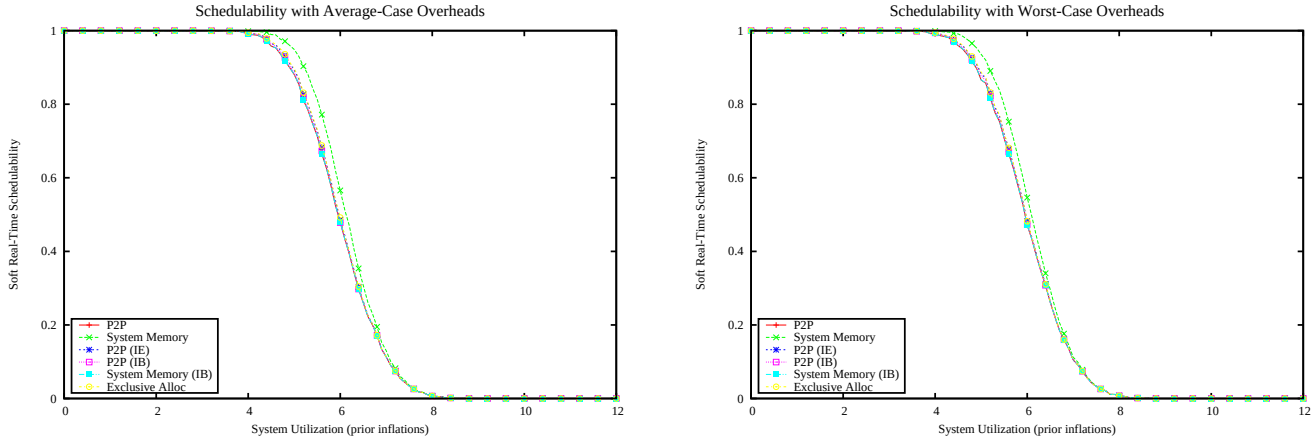

Figure 3328: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

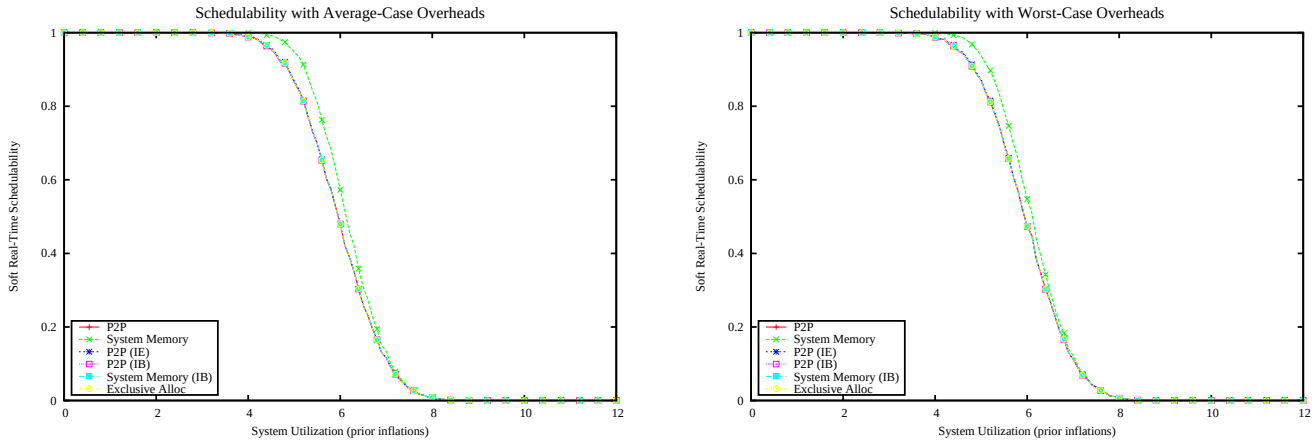

Figure 3329: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

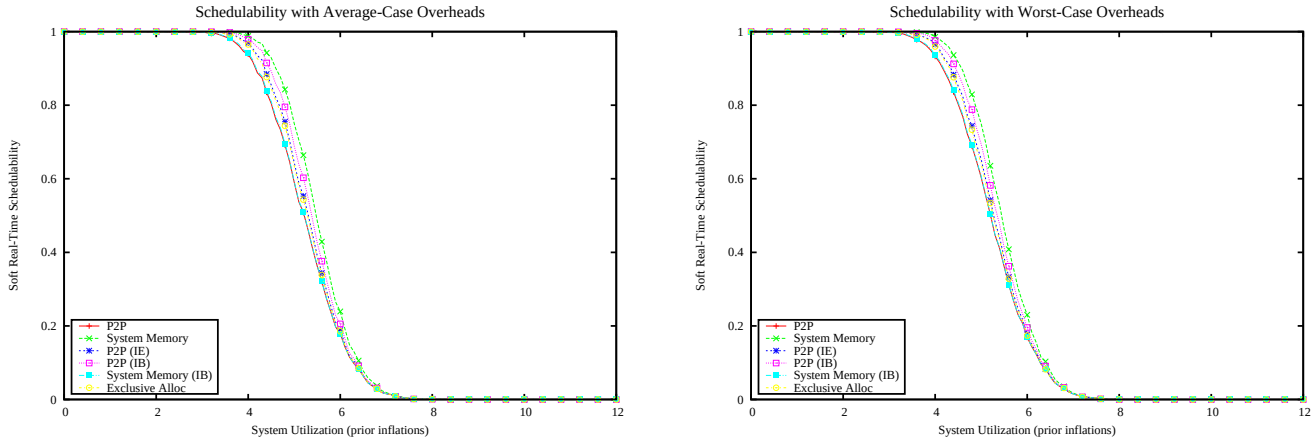

Figure 3330: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

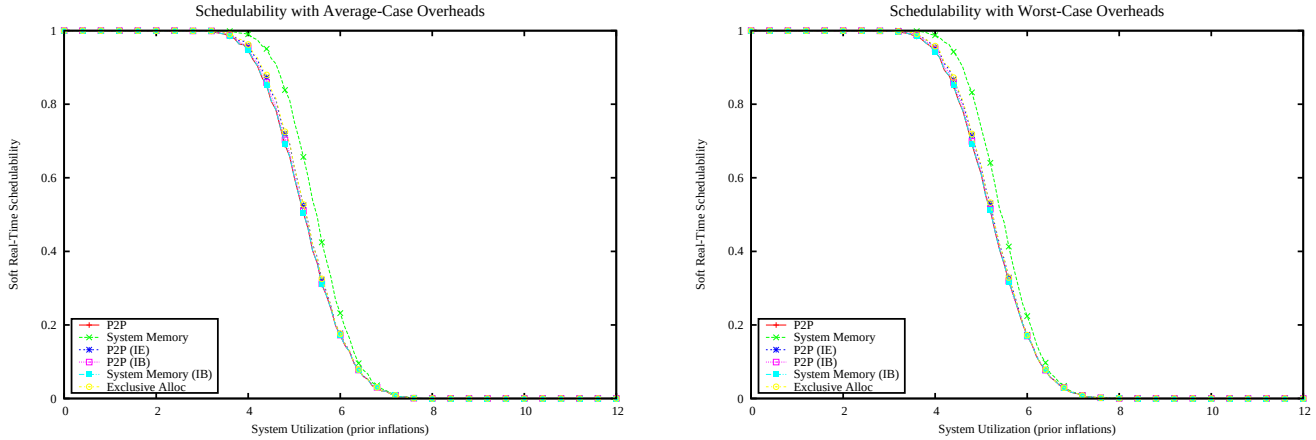

Figure 3331: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

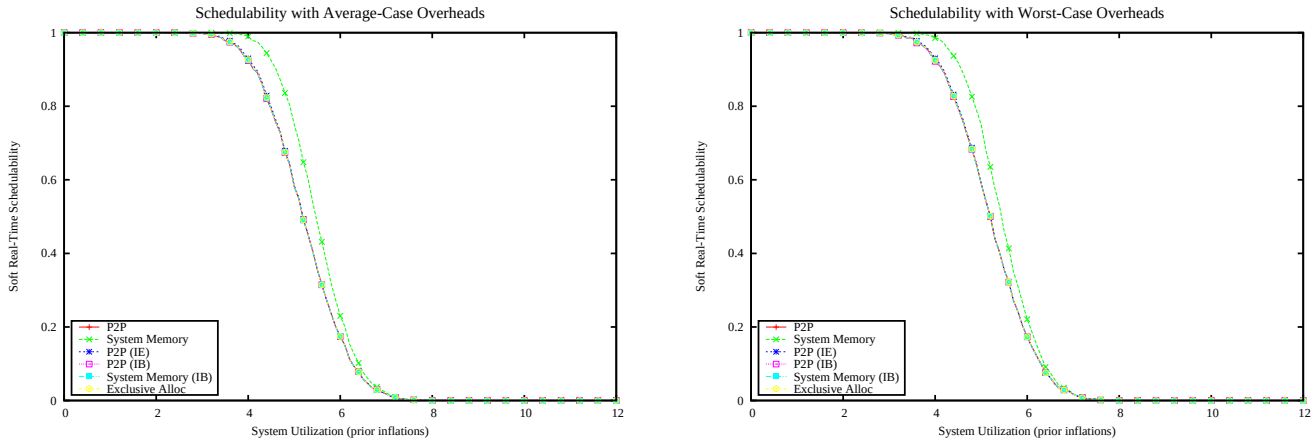

Figure 3332: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

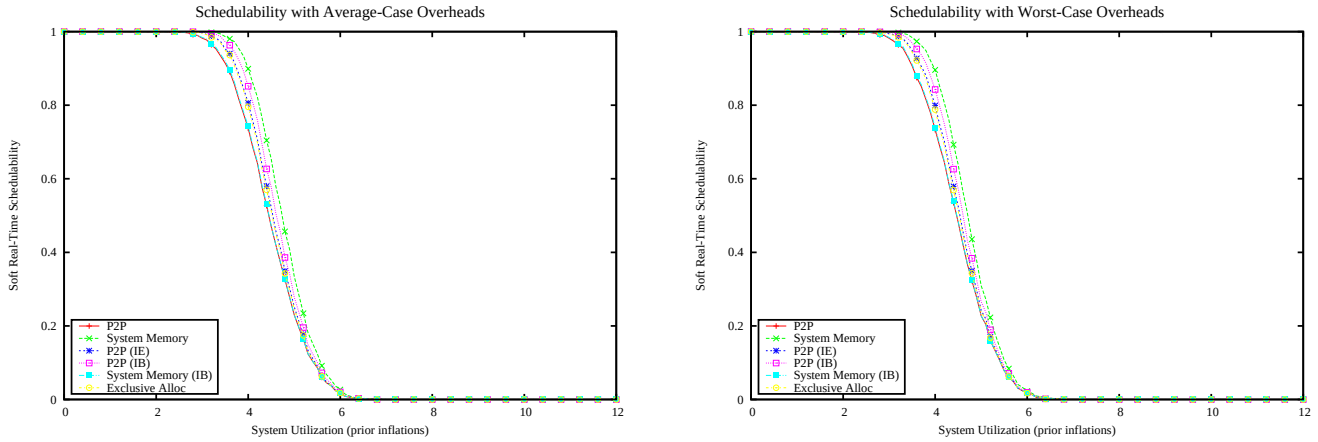

Figure 3333: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

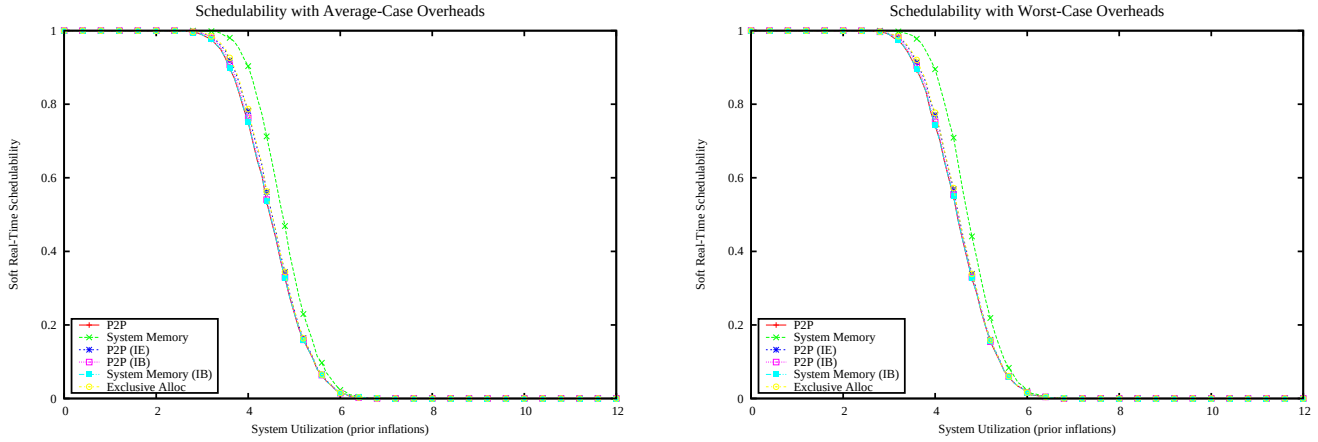

Figure 3334: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

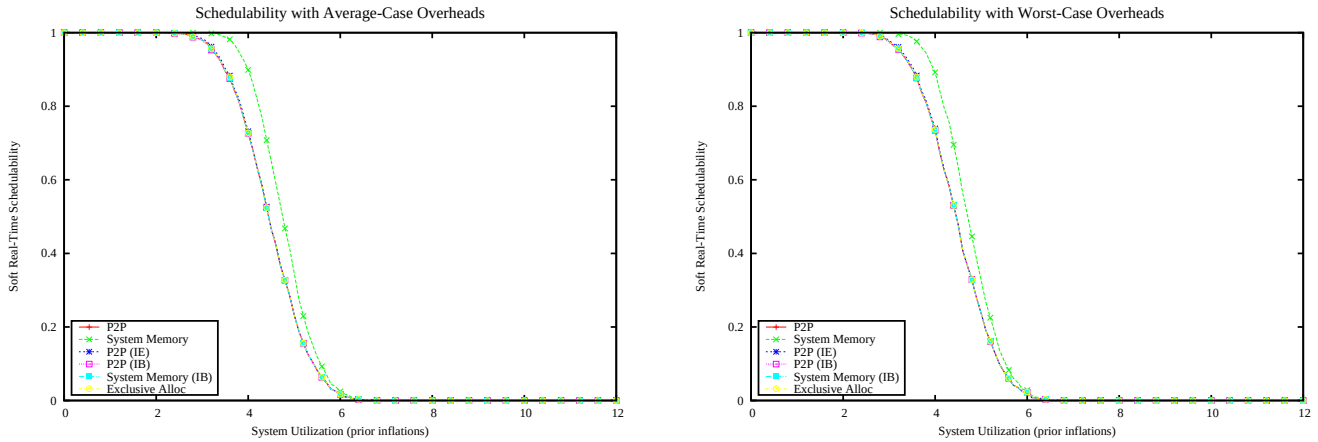

Figure 3335: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

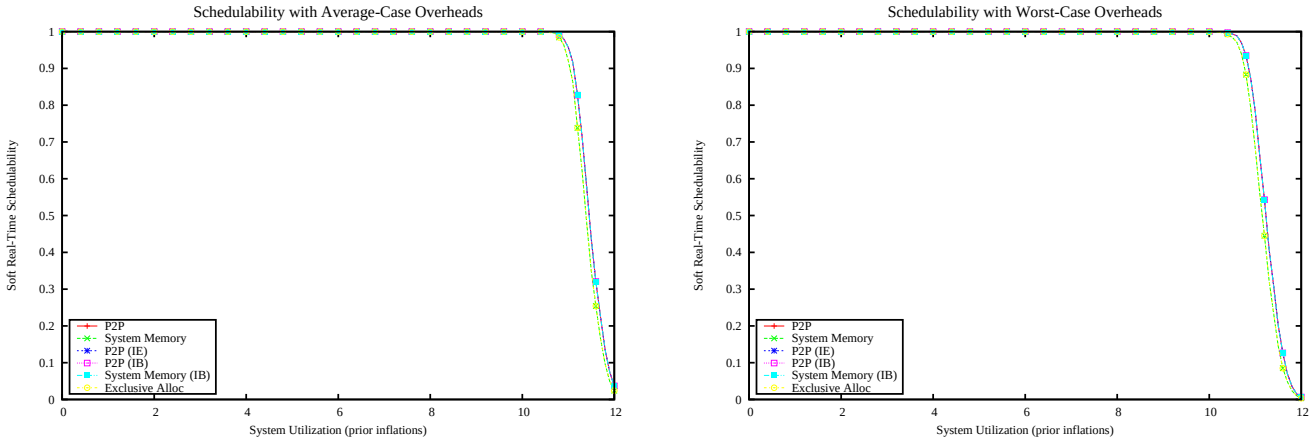

Figure 3336: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

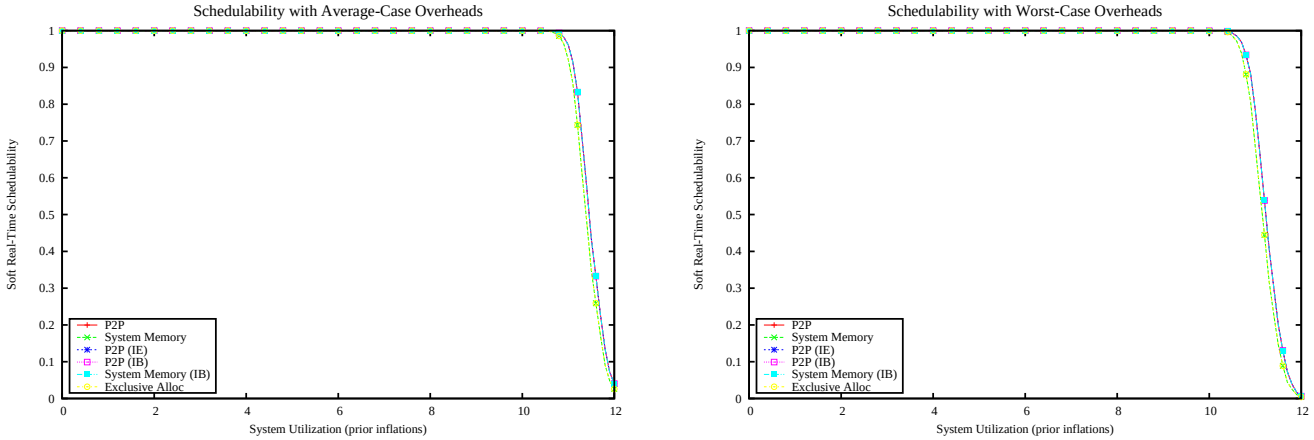

Figure 3337: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

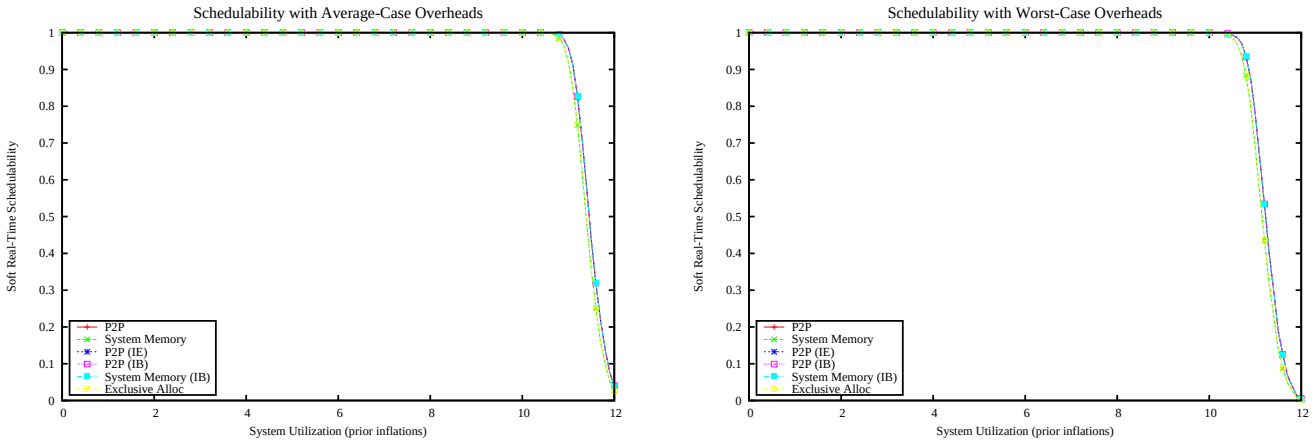

Figure 3338: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

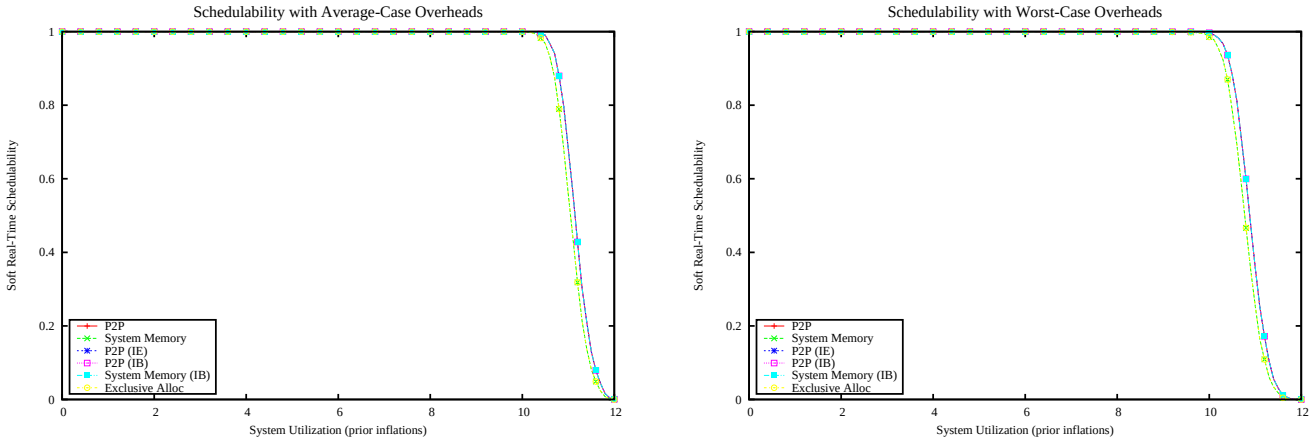

Figure 3339: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

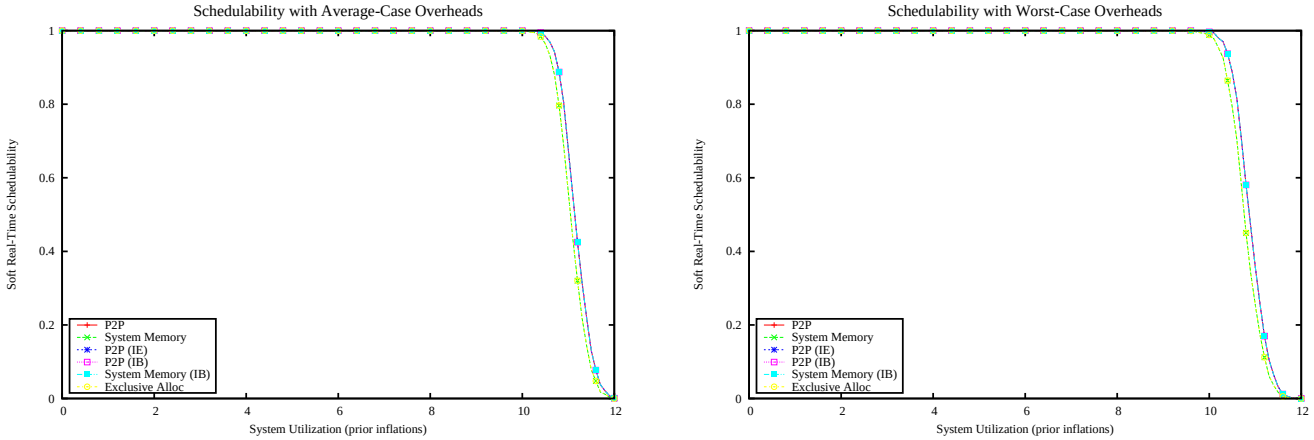

Figure 3340: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

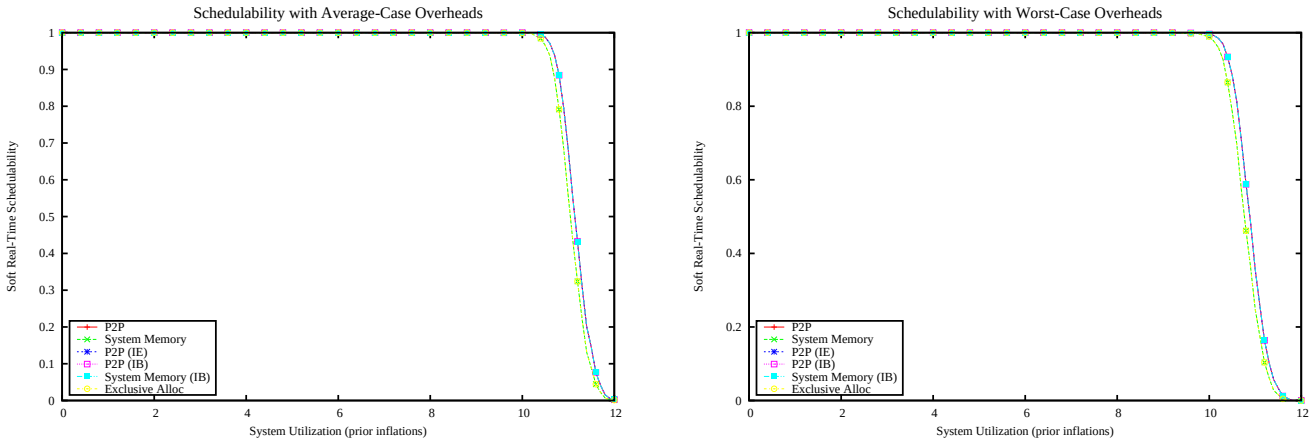

Figure 3341: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

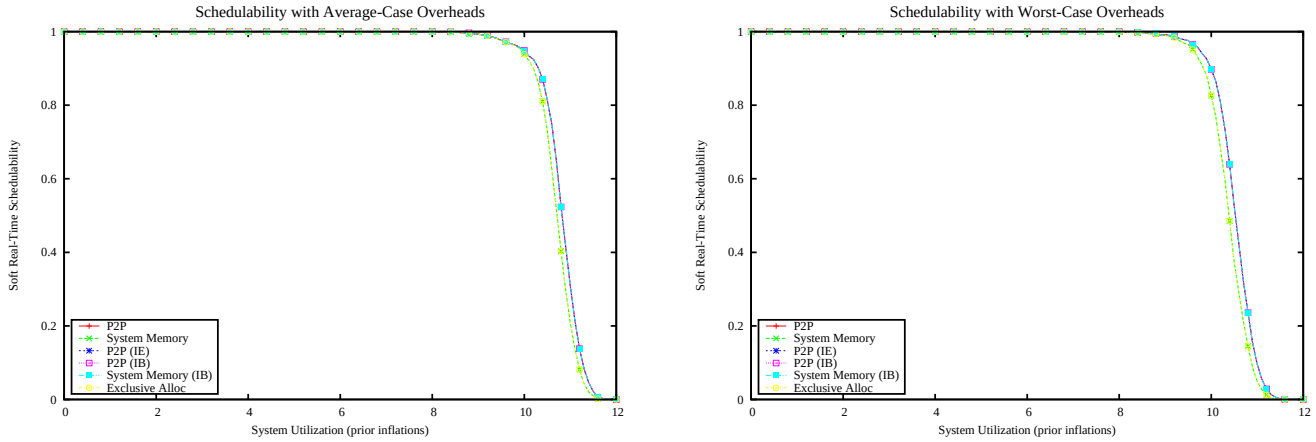

Figure 3342: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

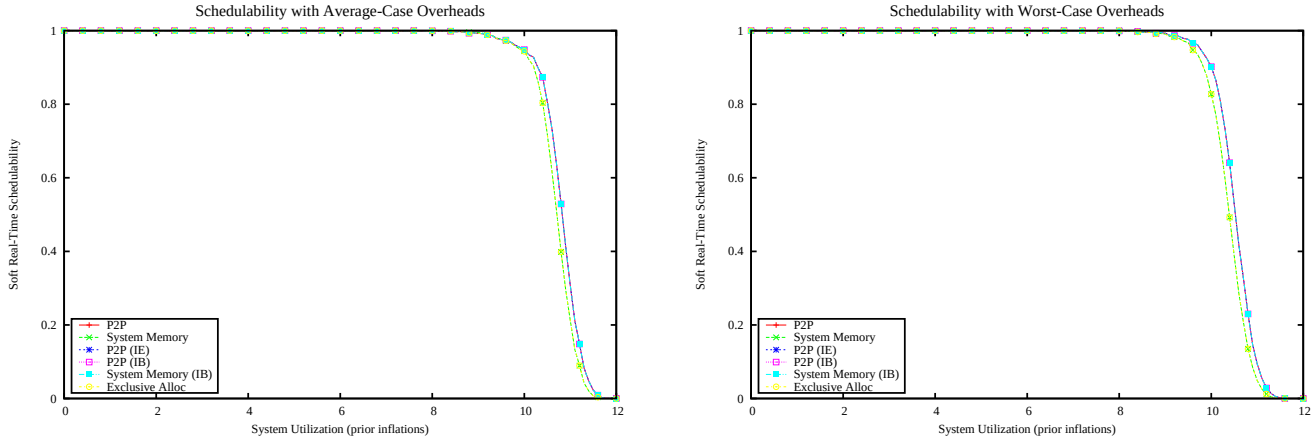

Figure 3343: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

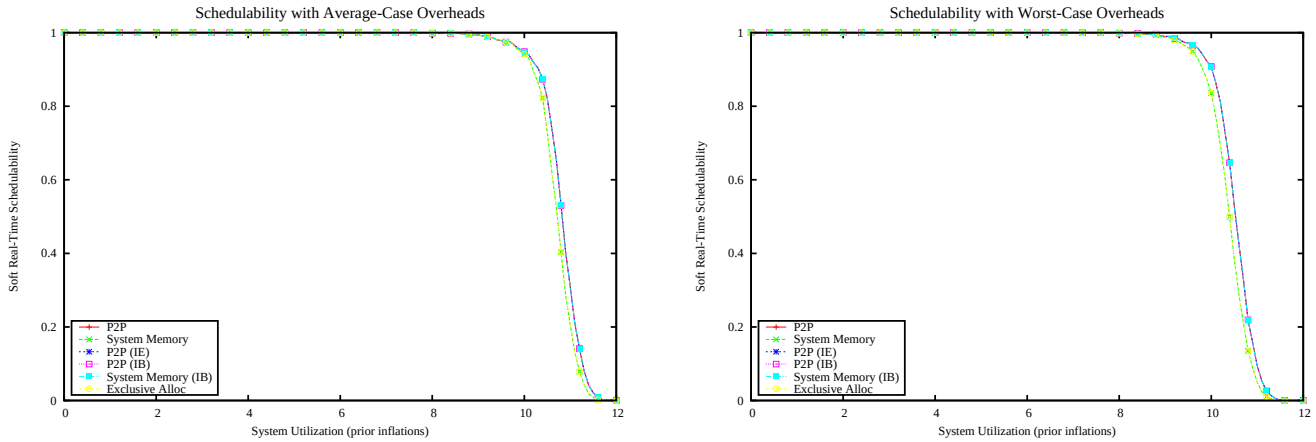

Figure 3344: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

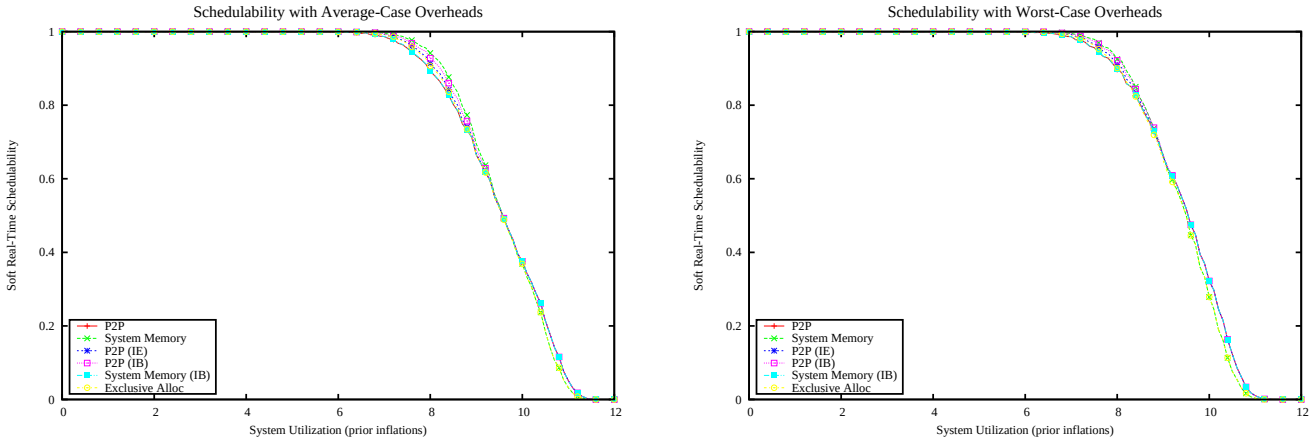

Figure 3345: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

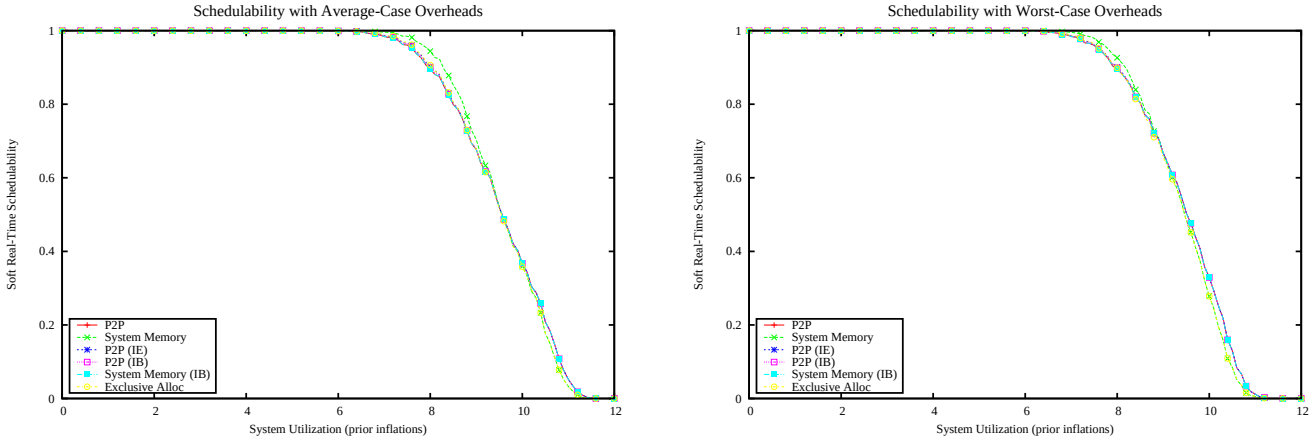

Figure 3346: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

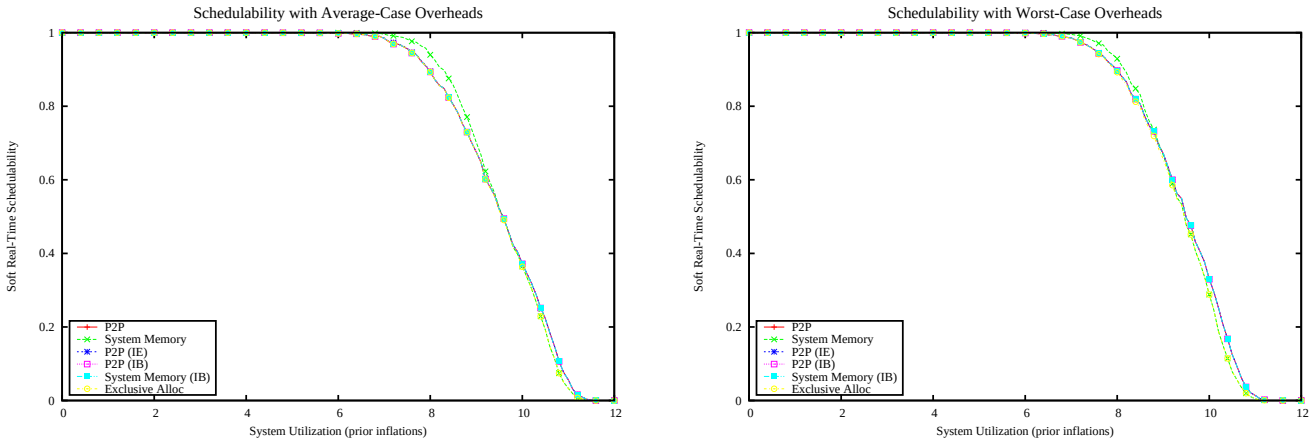

Figure 3347: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

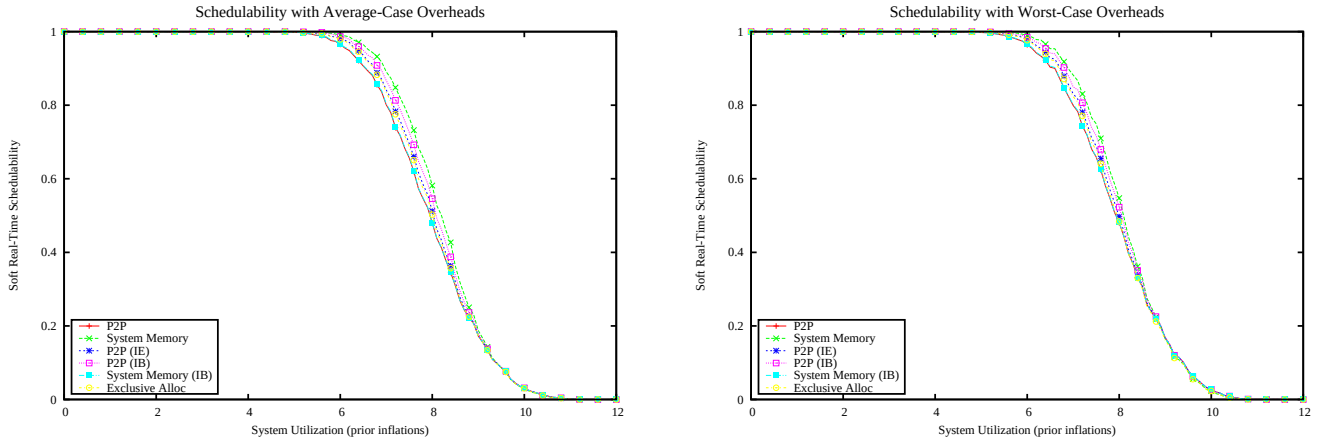

Figure 3348: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

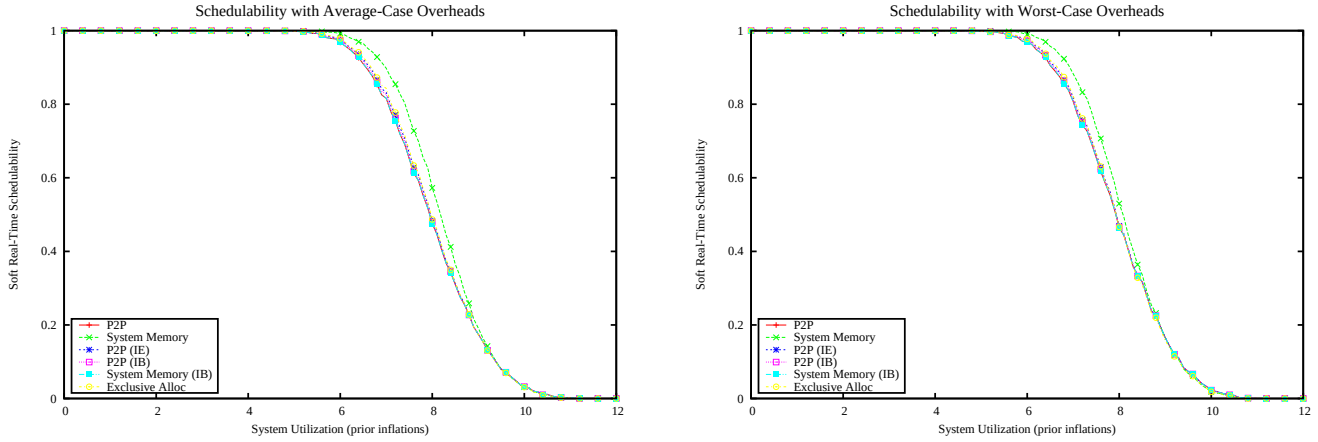

Figure 3349: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

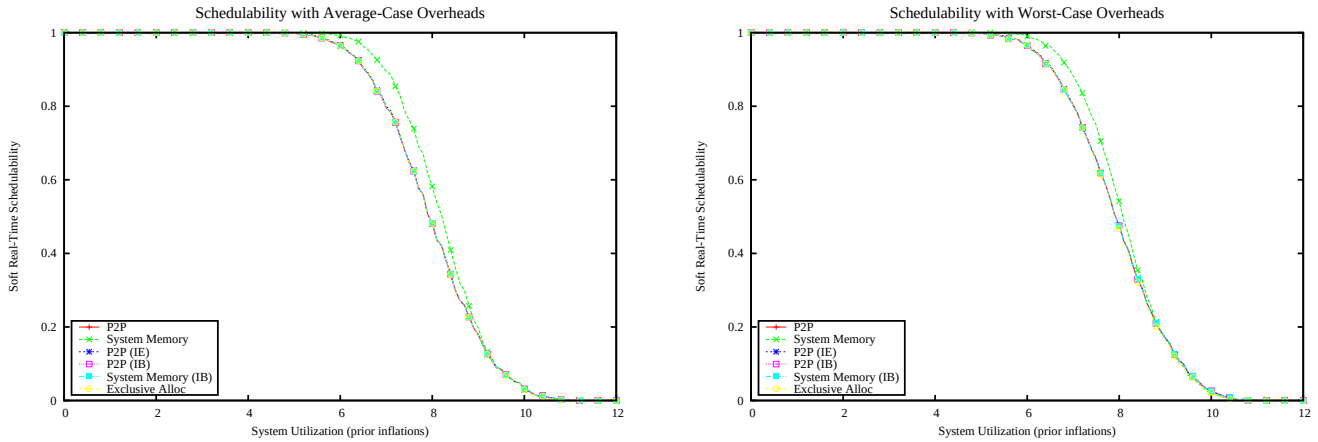

Figure 3350: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

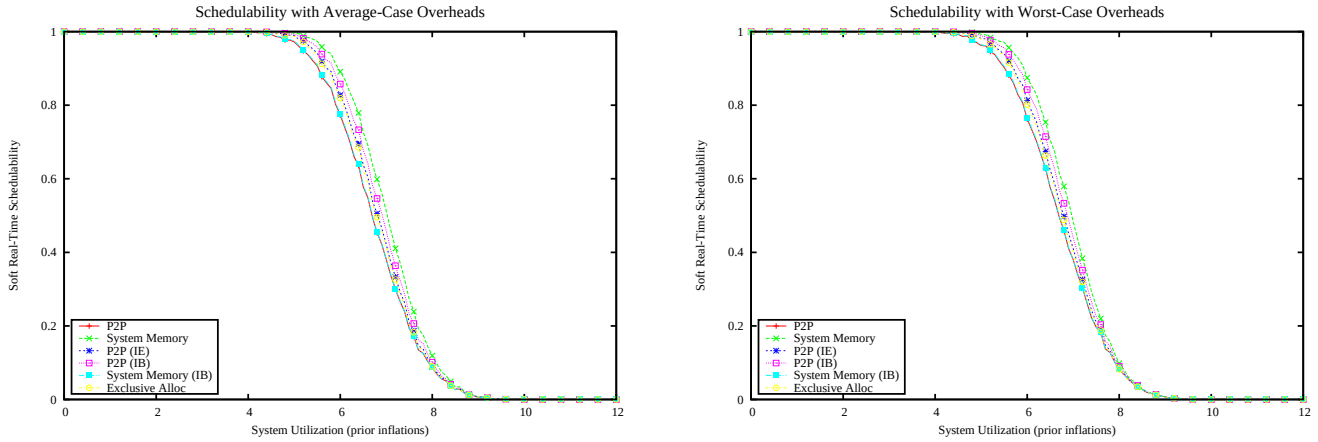

Figure 3351: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

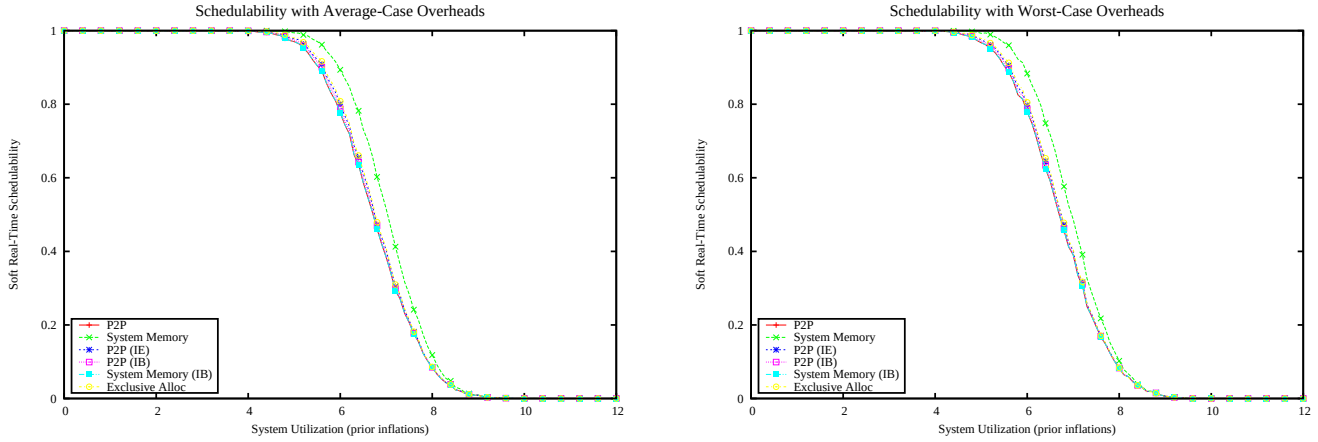

Figure 3352: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

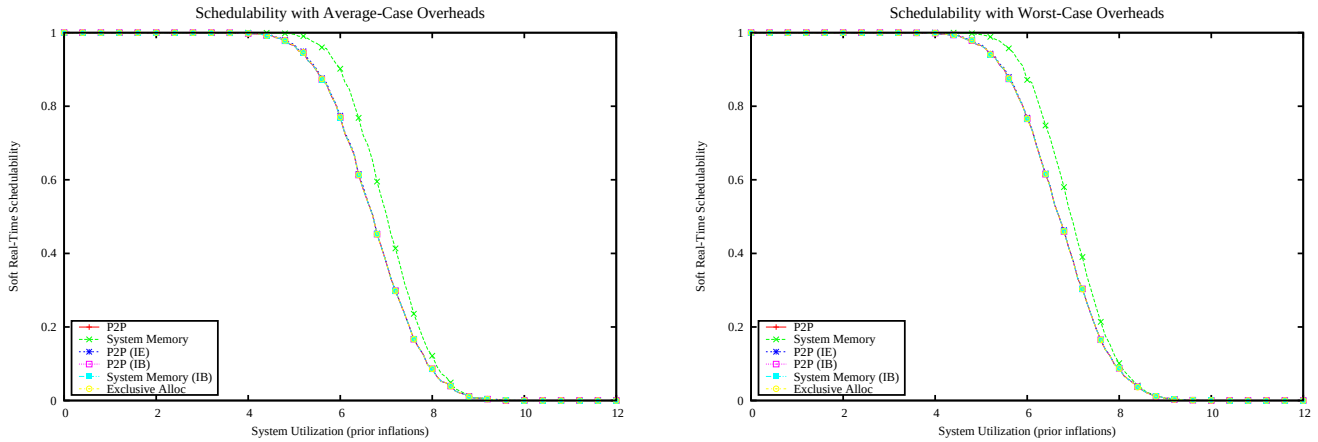

Figure 3353: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

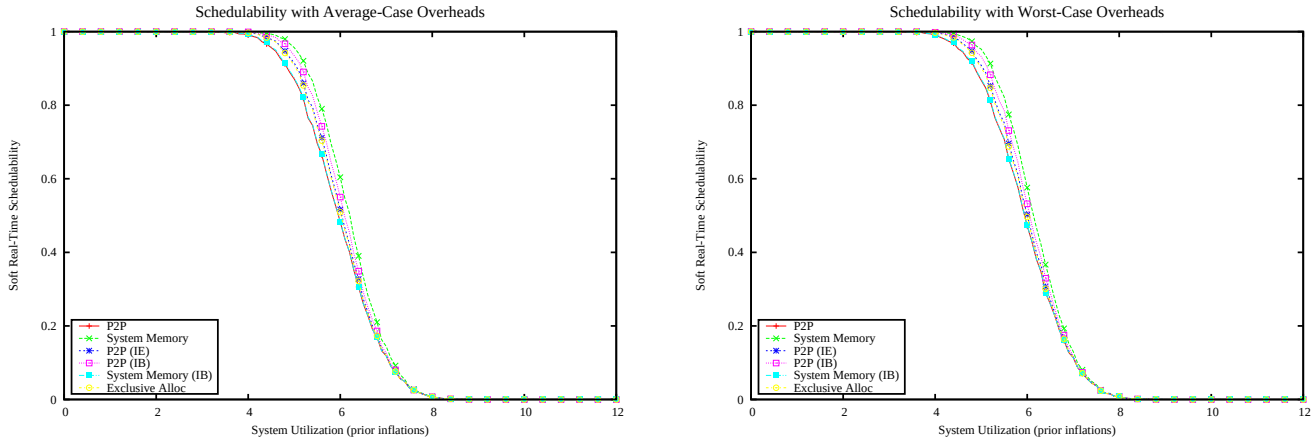

Figure 3354: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

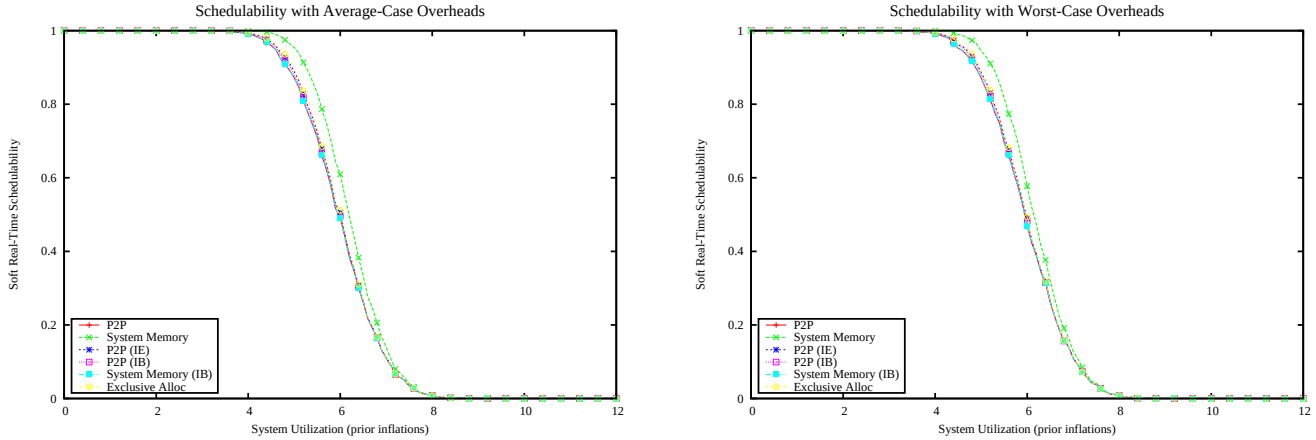

Figure 3355: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

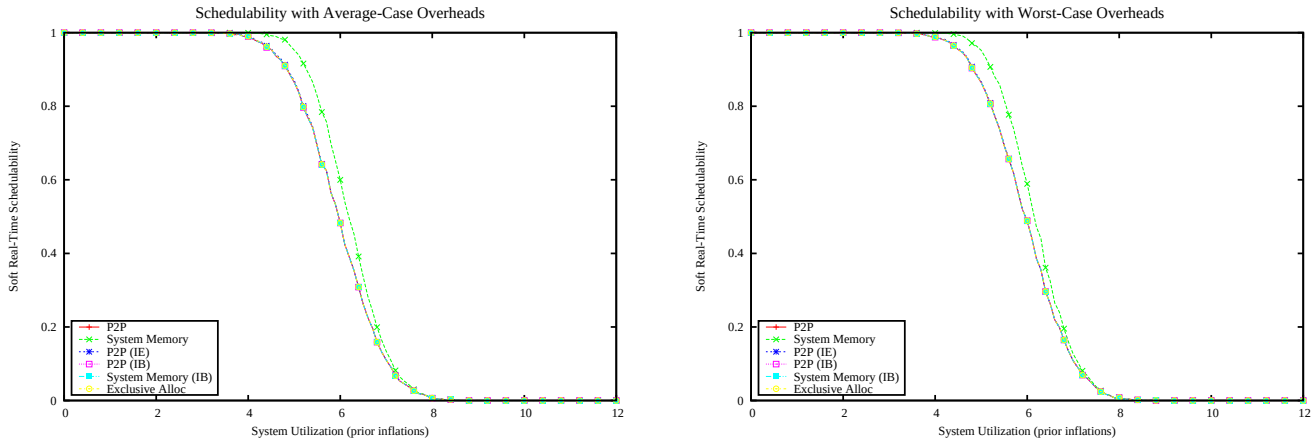

Figure 3356: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

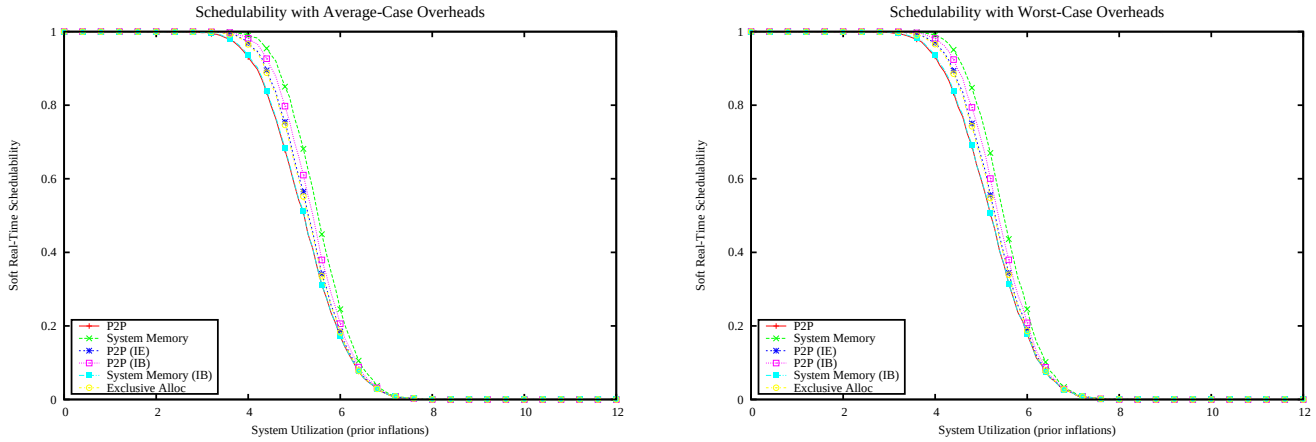

Figure 3357: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

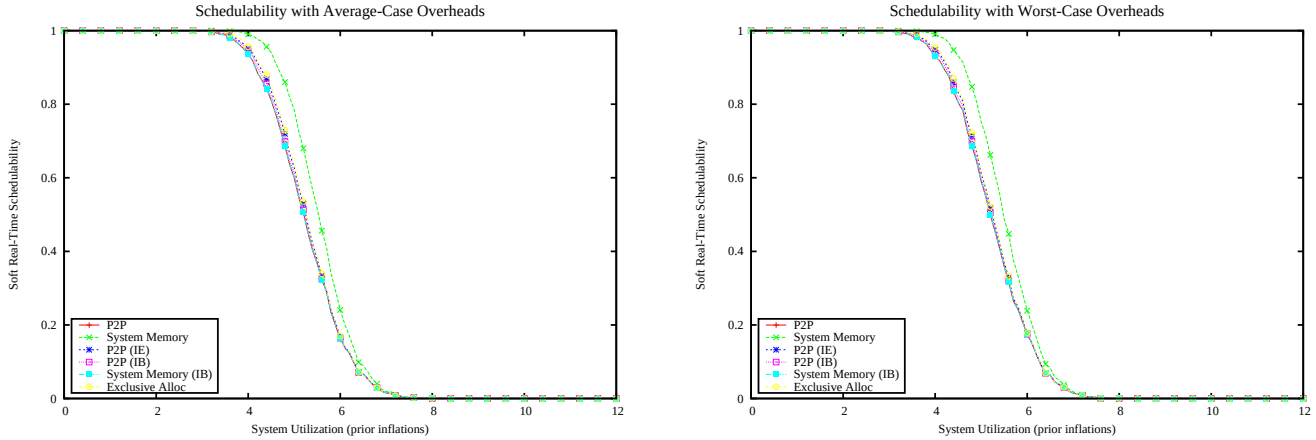

Figure 3358: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

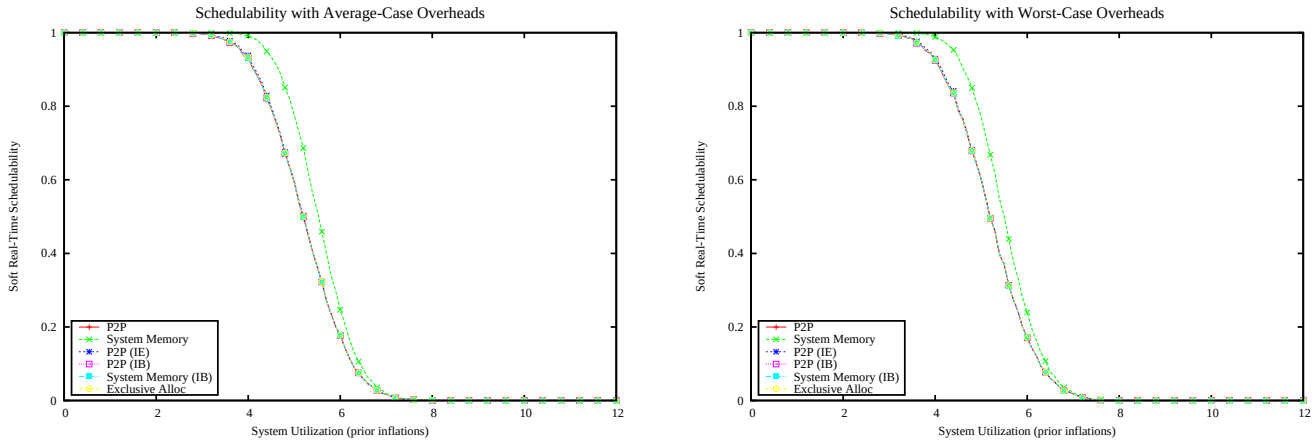

Figure 3359: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

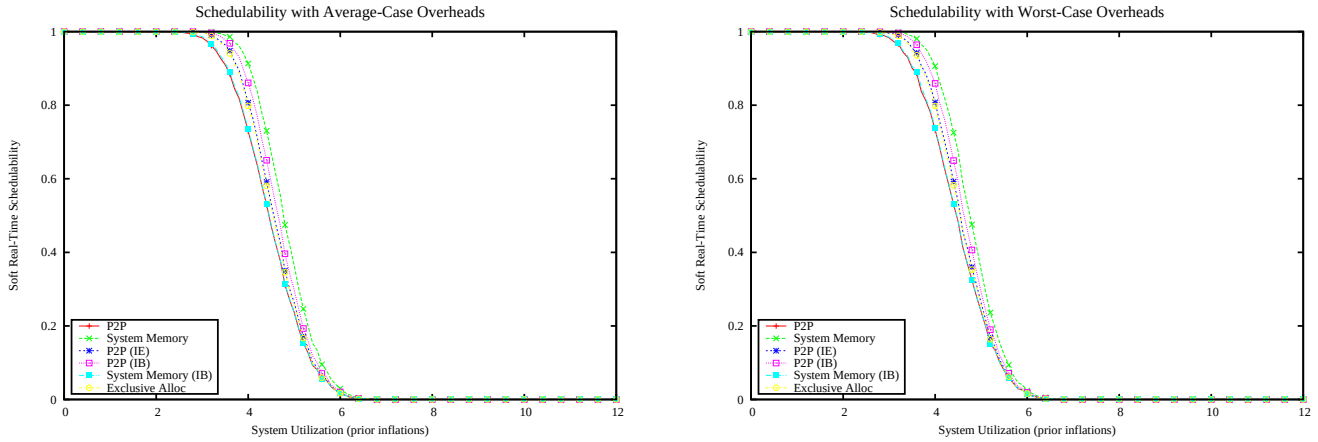

Figure 3360: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

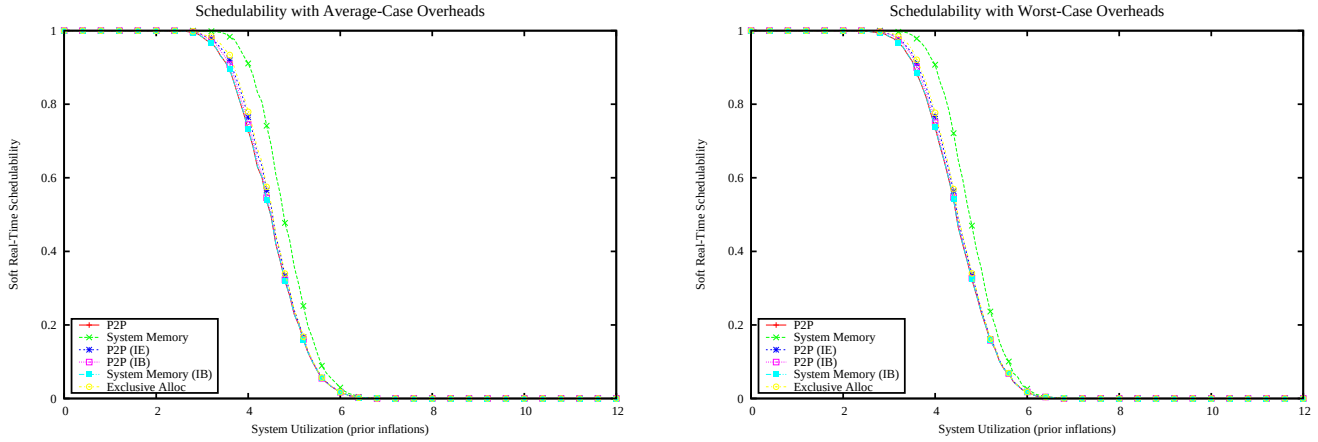

Figure 3361: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

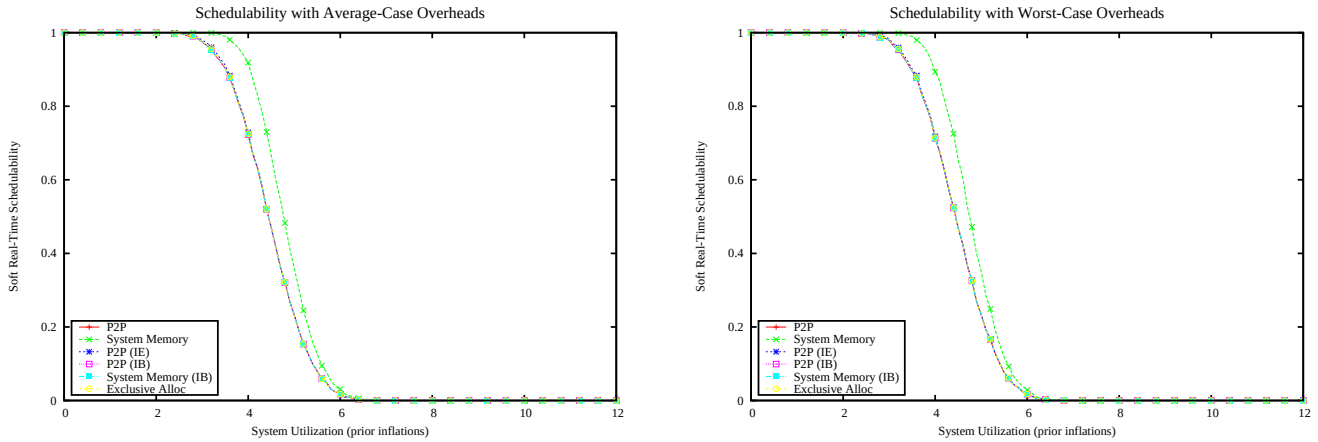

Figure 3362: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

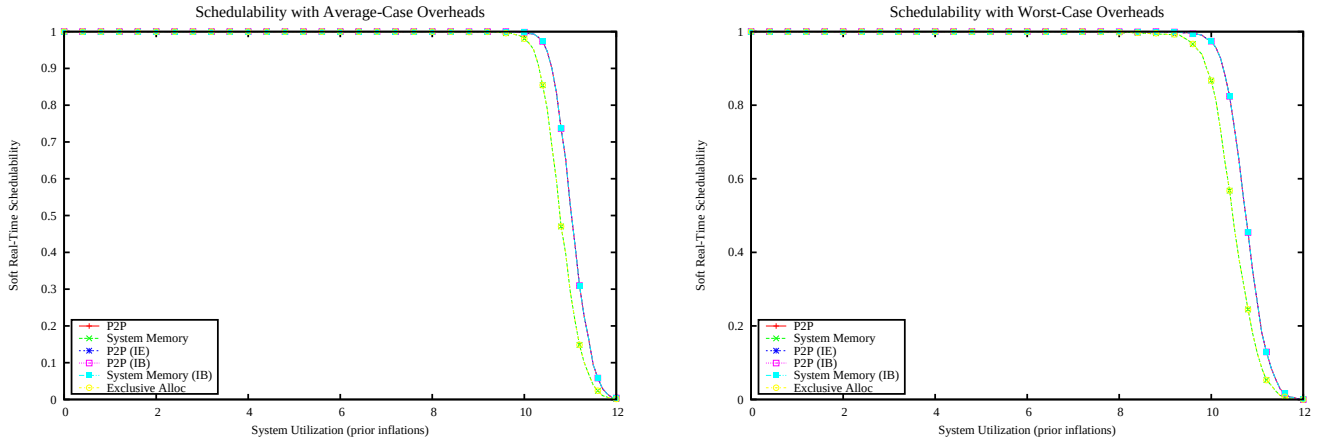

Figure 3363: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

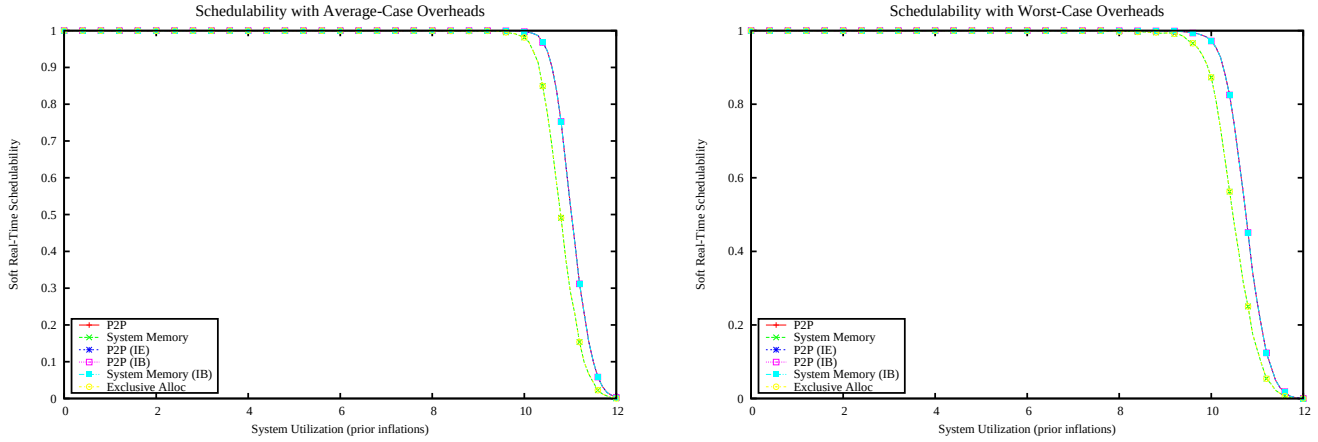

Figure 3364: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

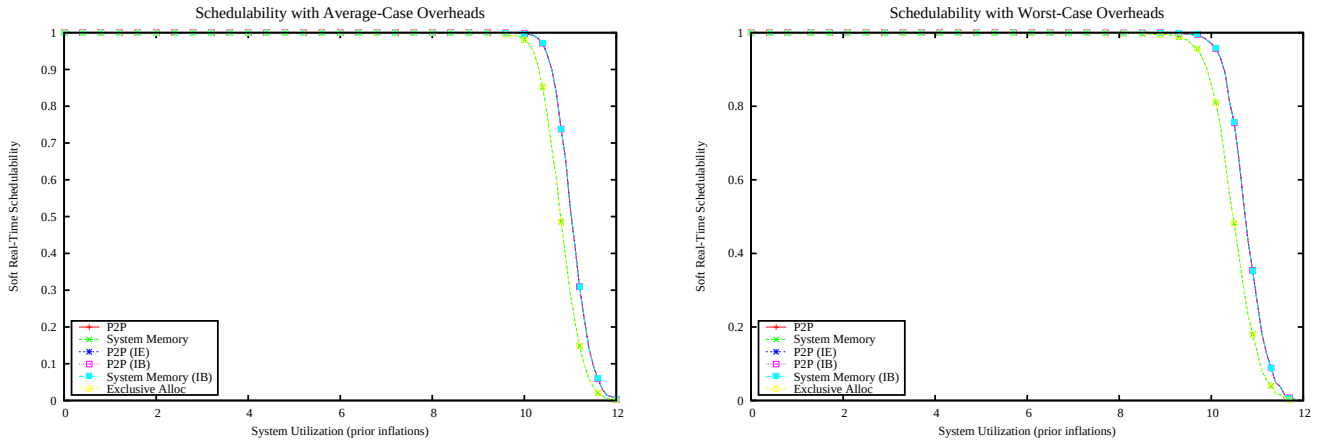

Figure 3365: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

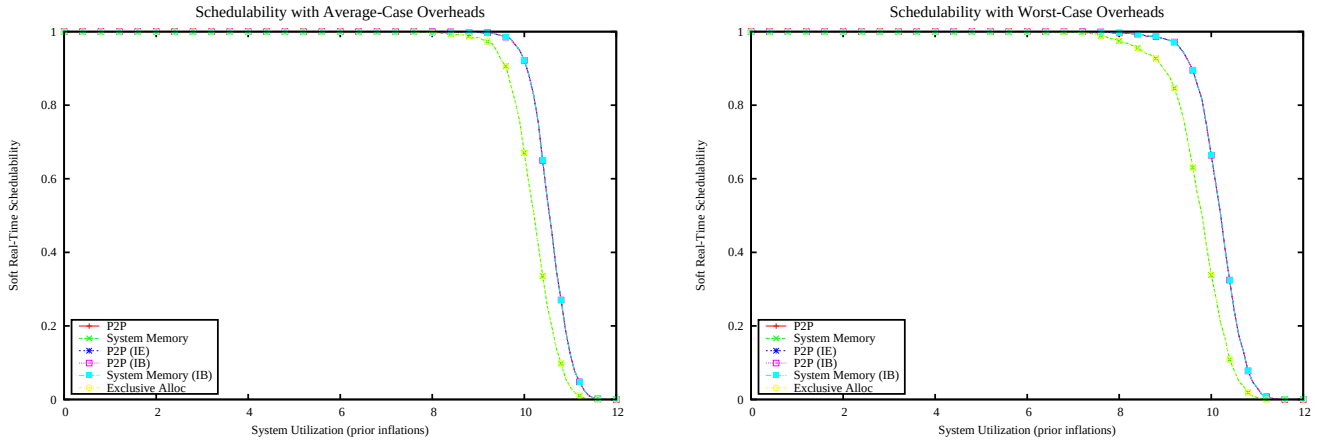

Figure 3366: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

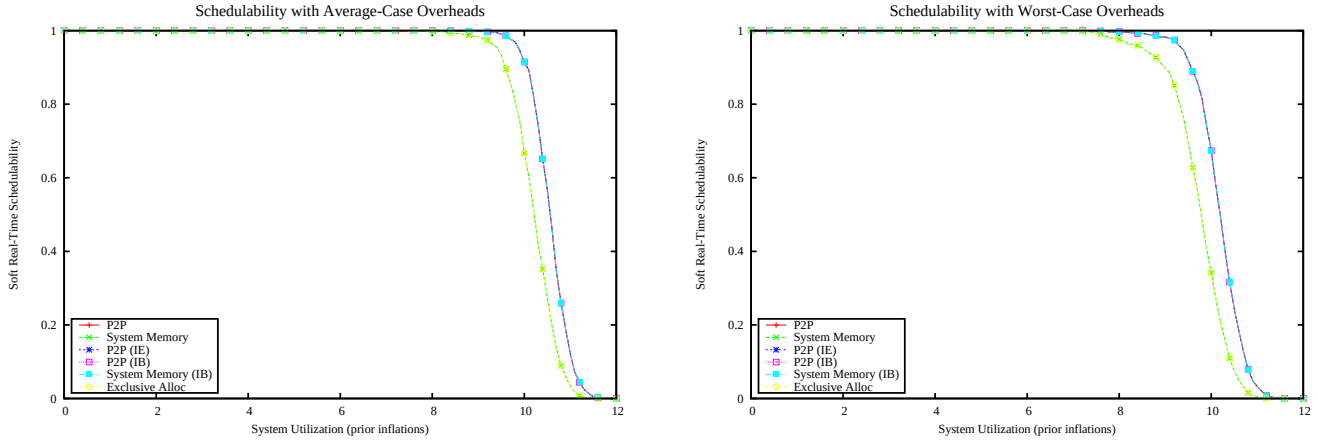

Figure 3367: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

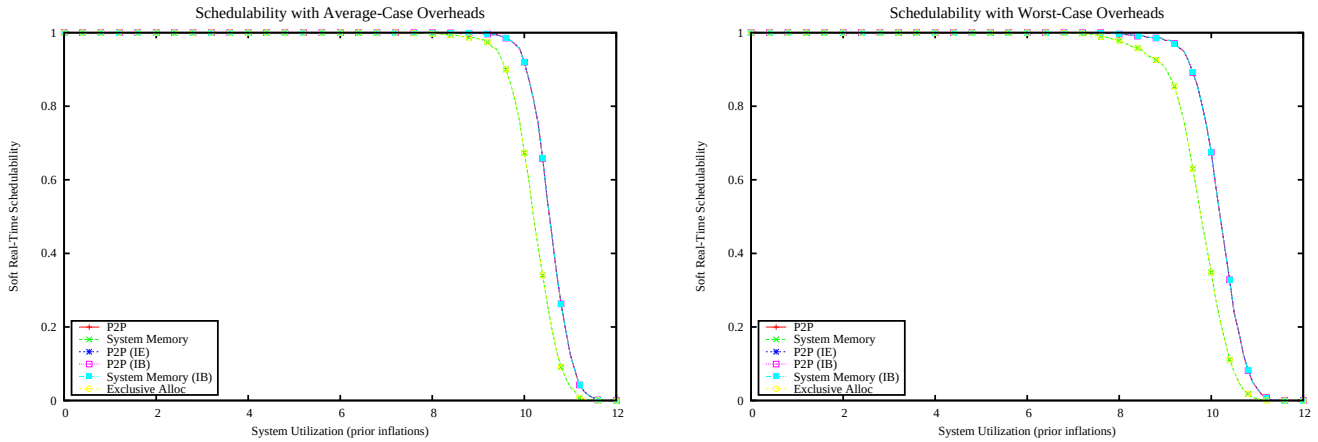

Figure 3368: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

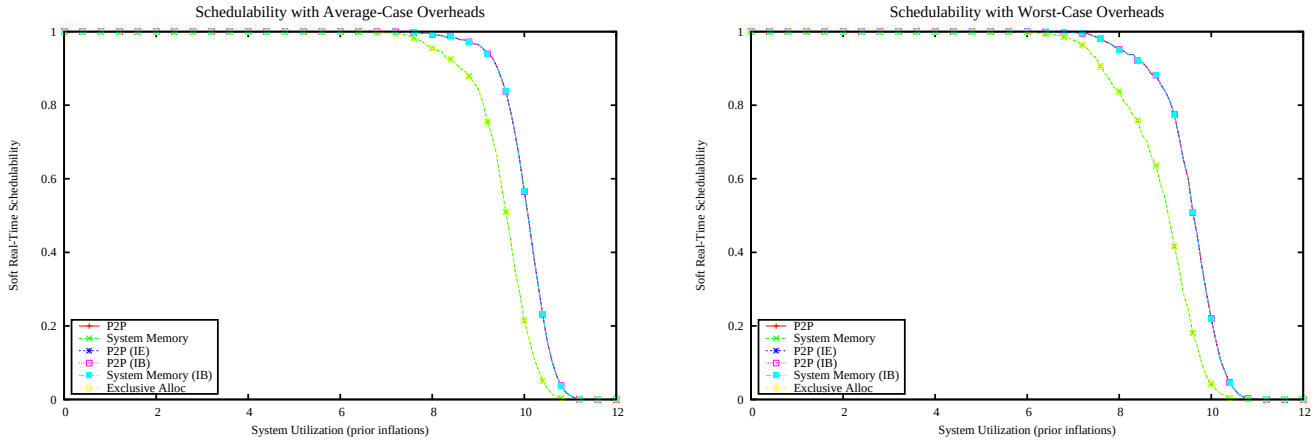

Figure 3369: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

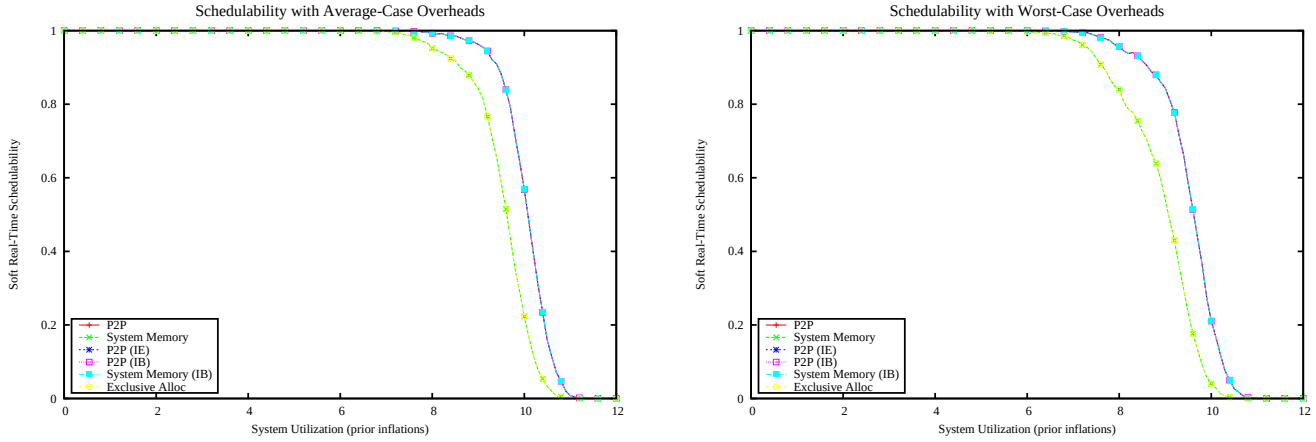

Figure 3370: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

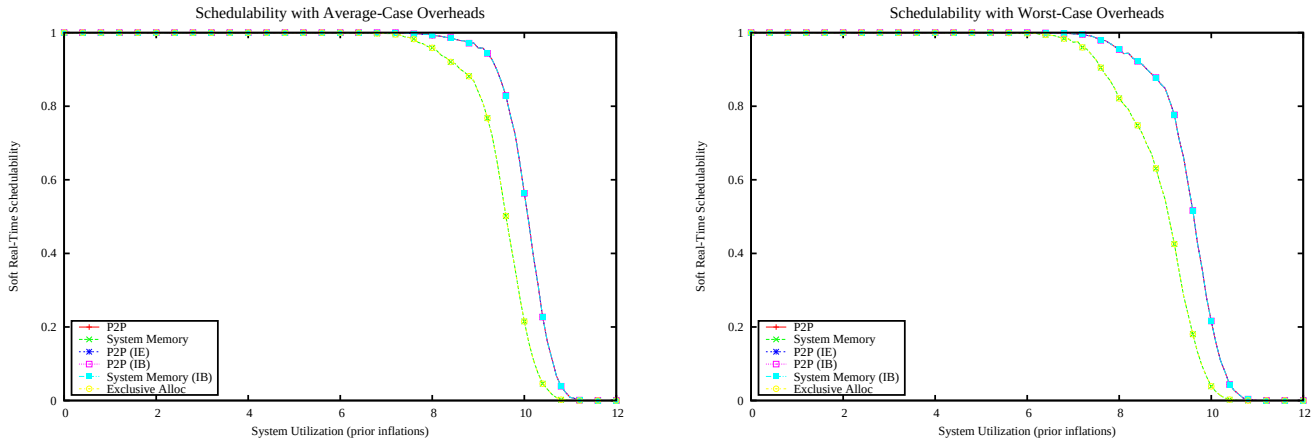

Figure 3371: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

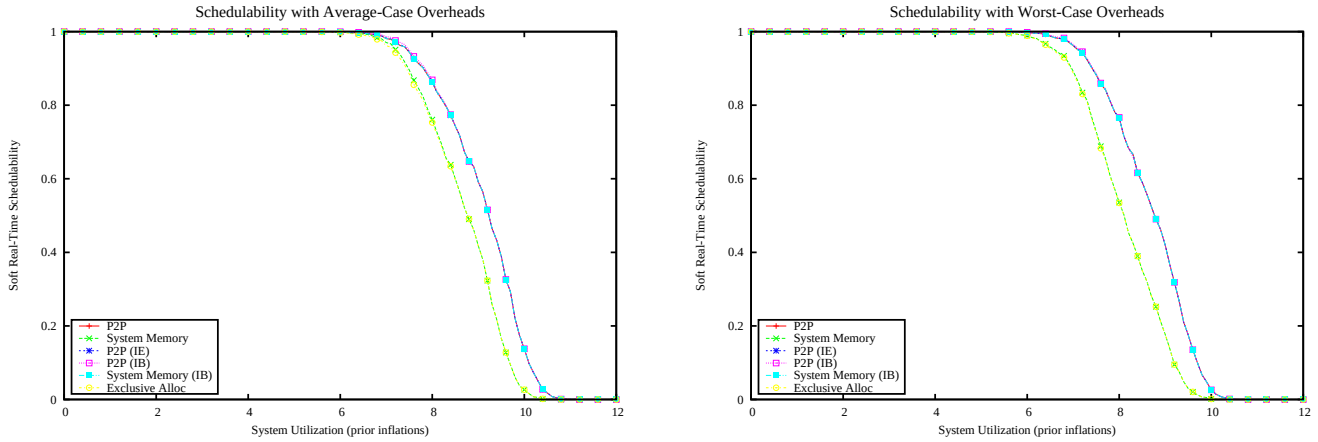

Figure 3372: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

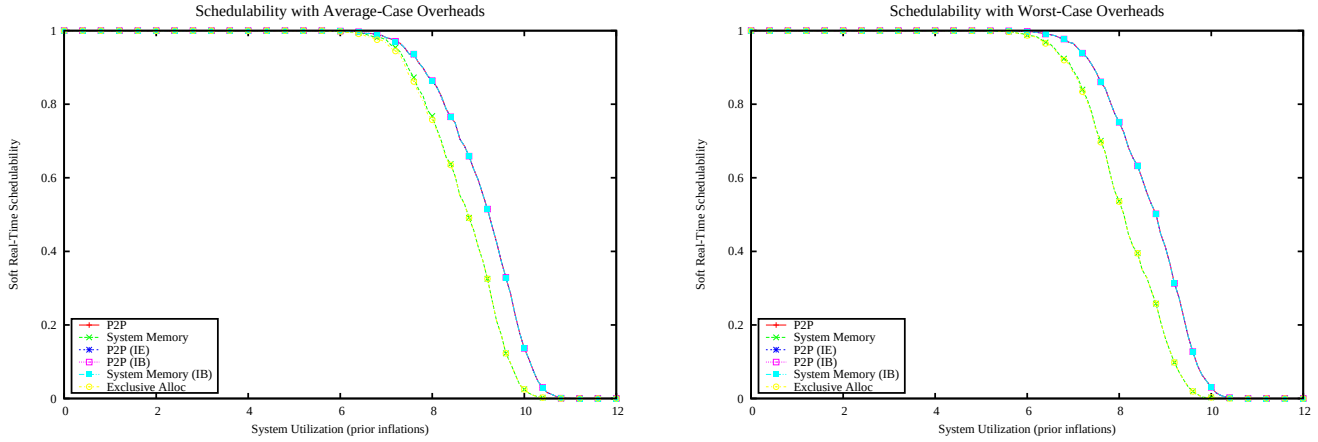

Figure 3373: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

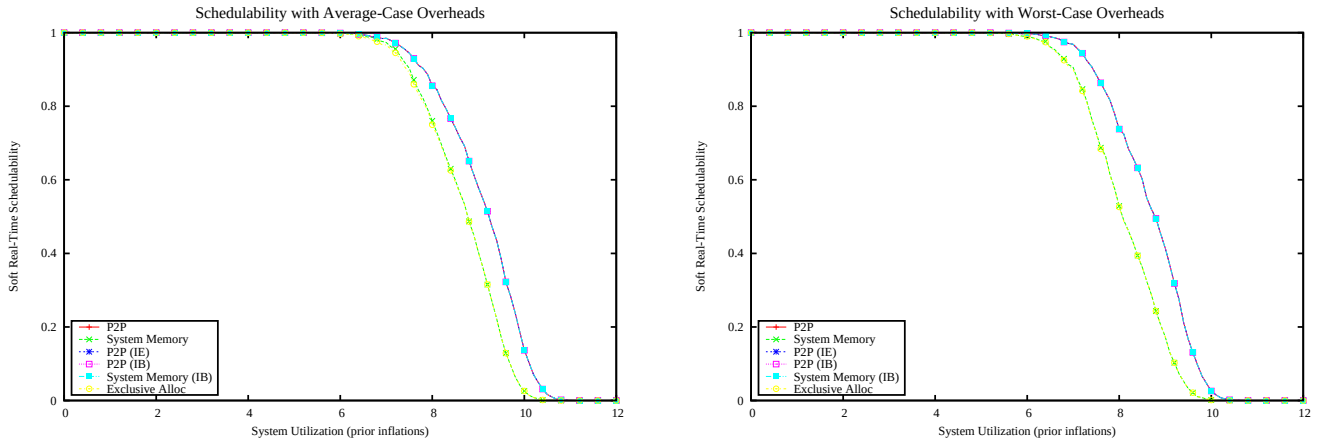

Figure 3374: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

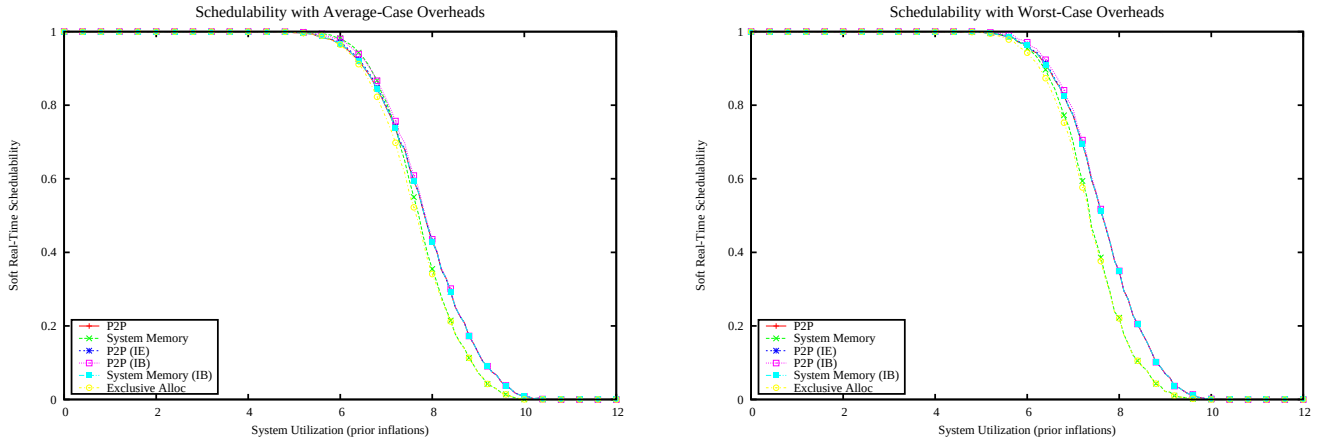

Figure 3375: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

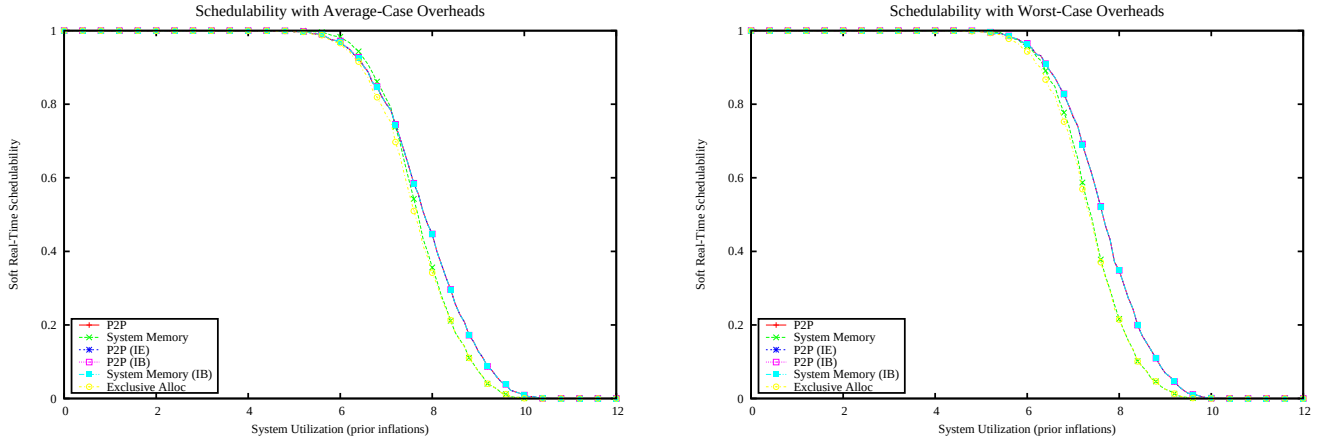

Figure 3376: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

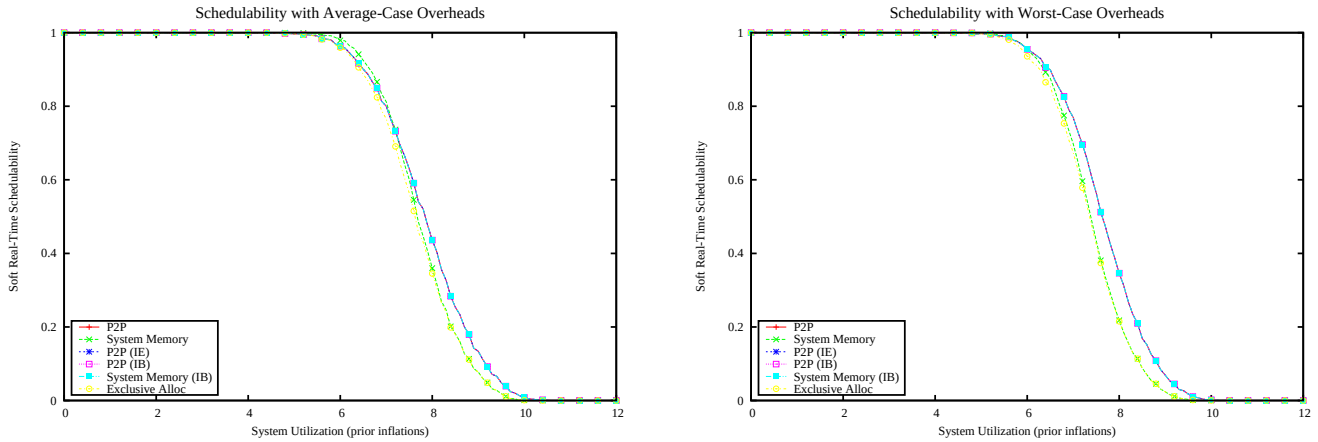

Figure 3377: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

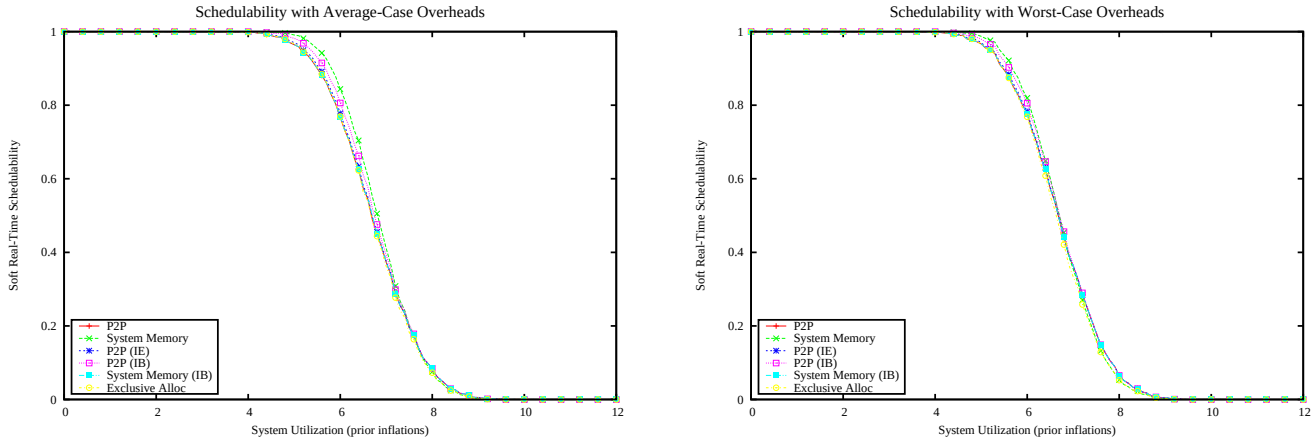

Figure 3378: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

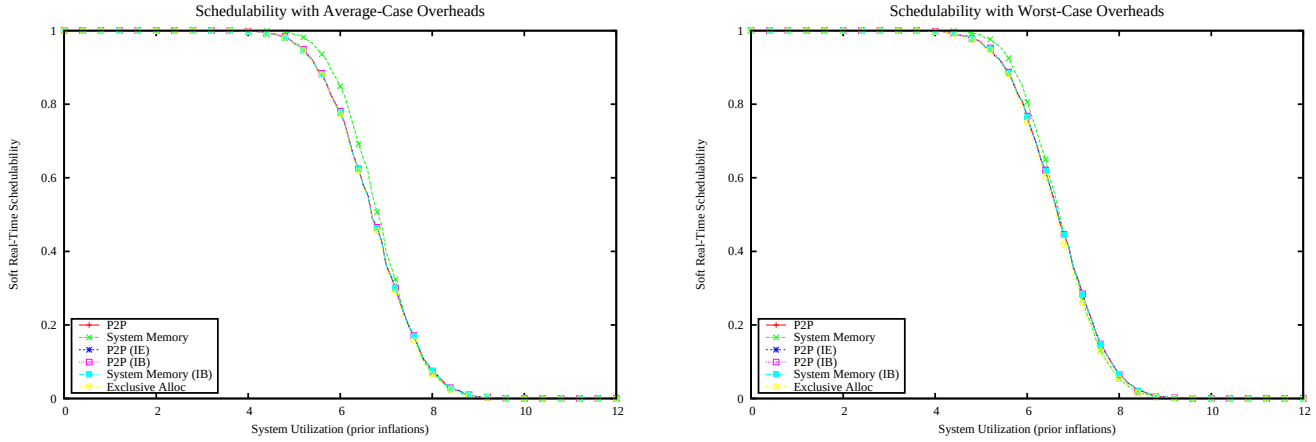

Figure 3379: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

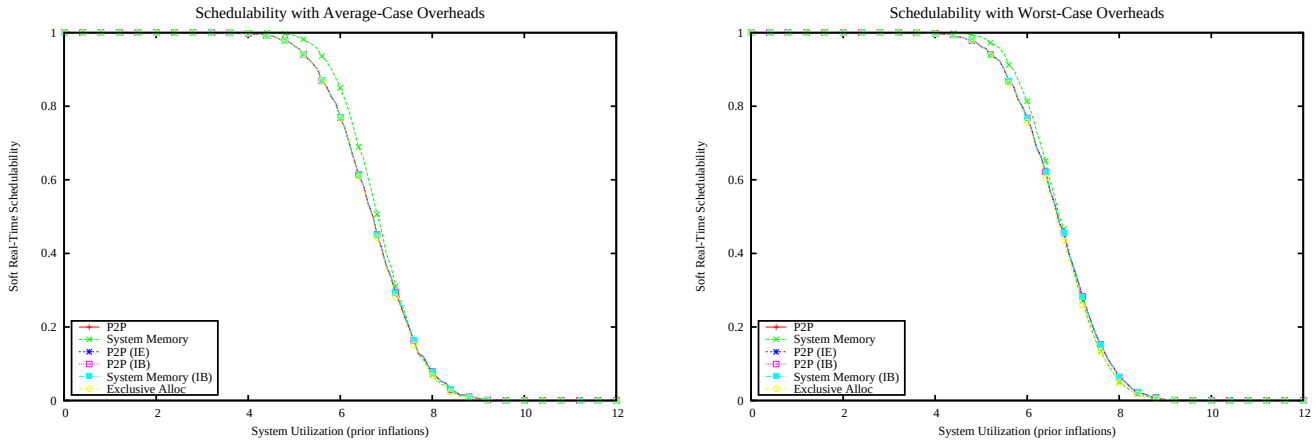

Figure 3380: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

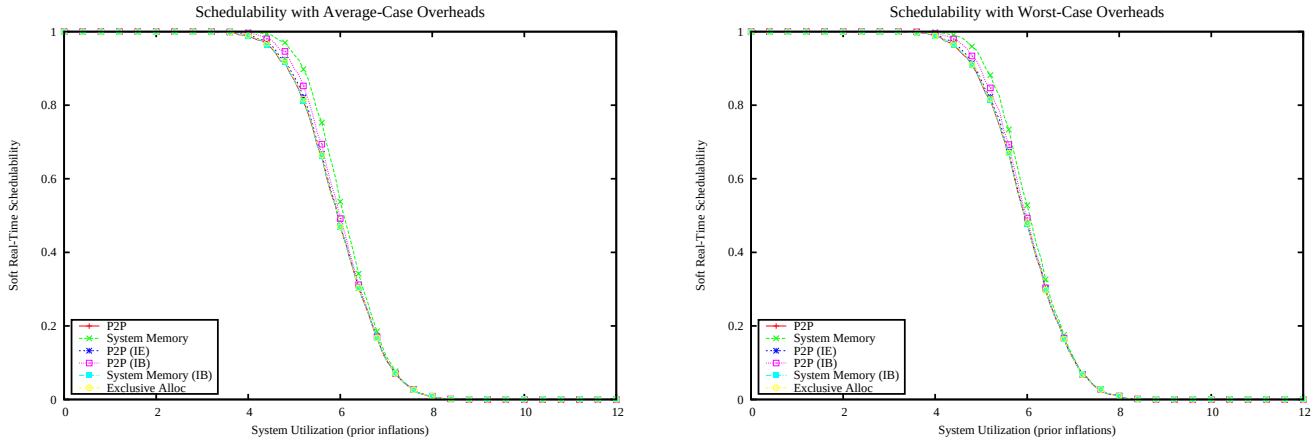

Figure 3381: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

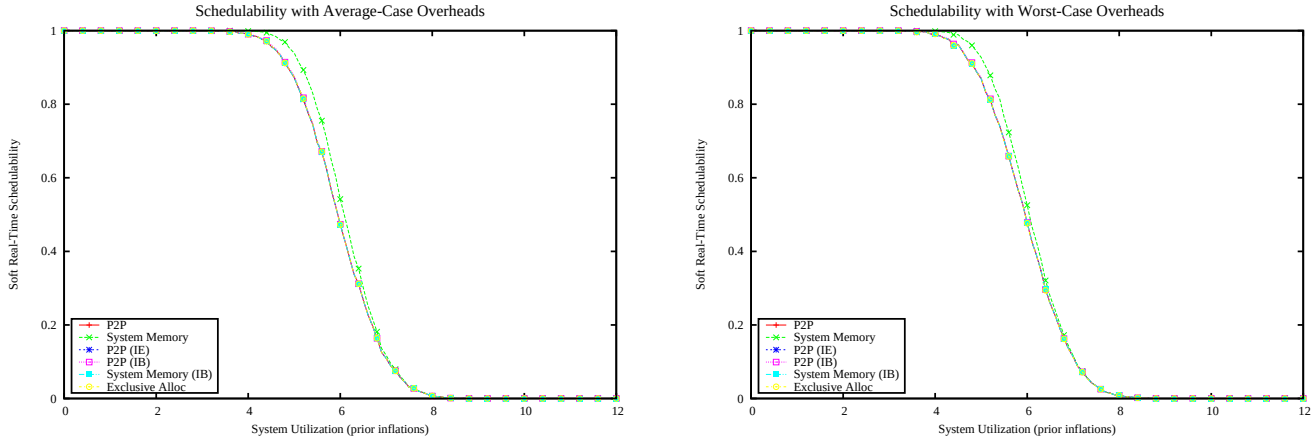

Figure 3382: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

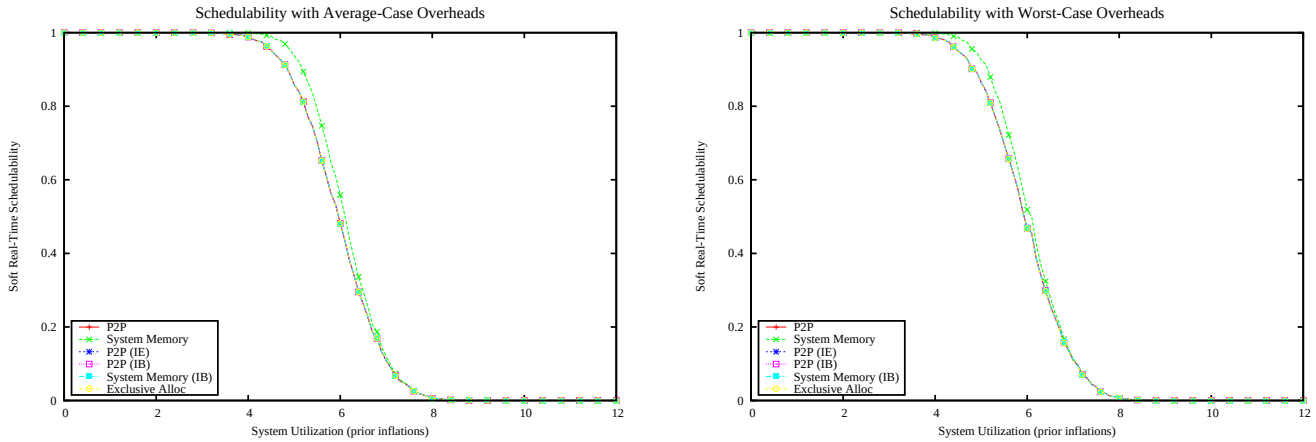

Figure 3383: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

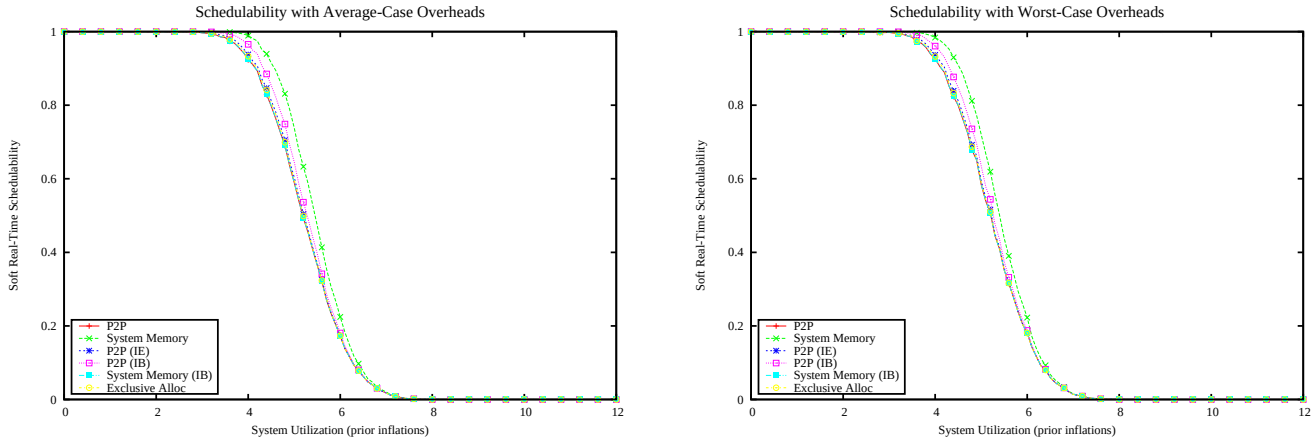

Figure 3384: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

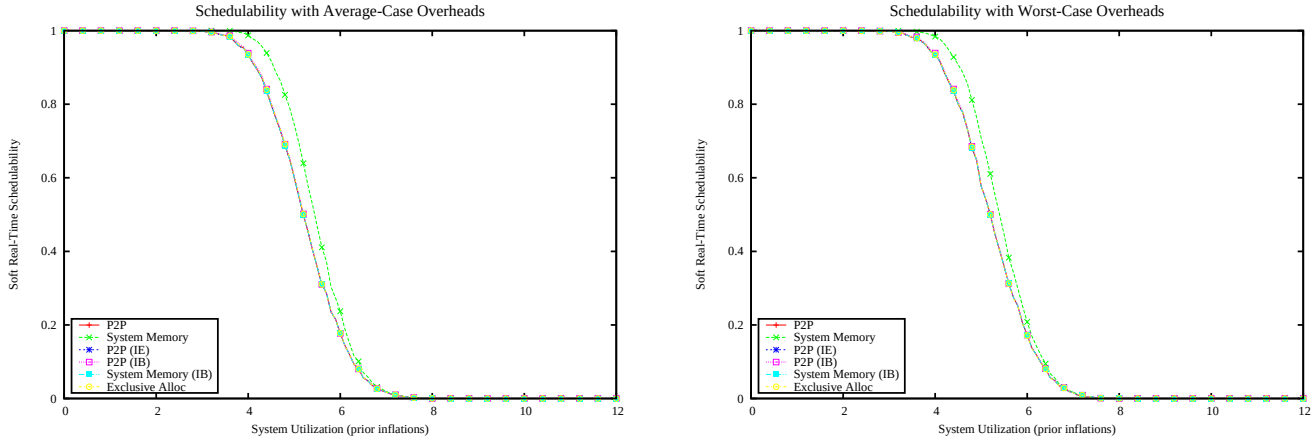

Figure 3385: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

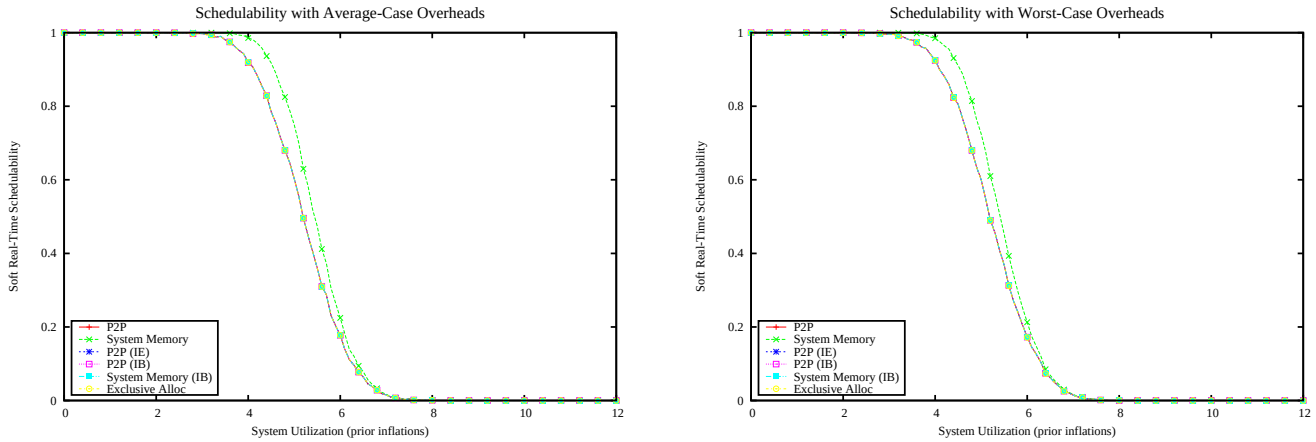

Figure 3386: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

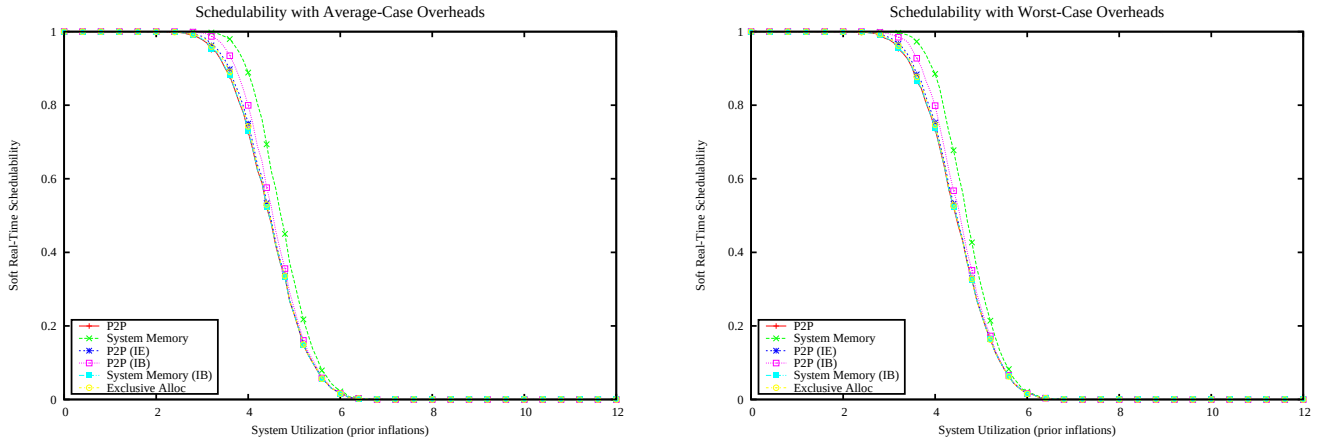

Figure 3387: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

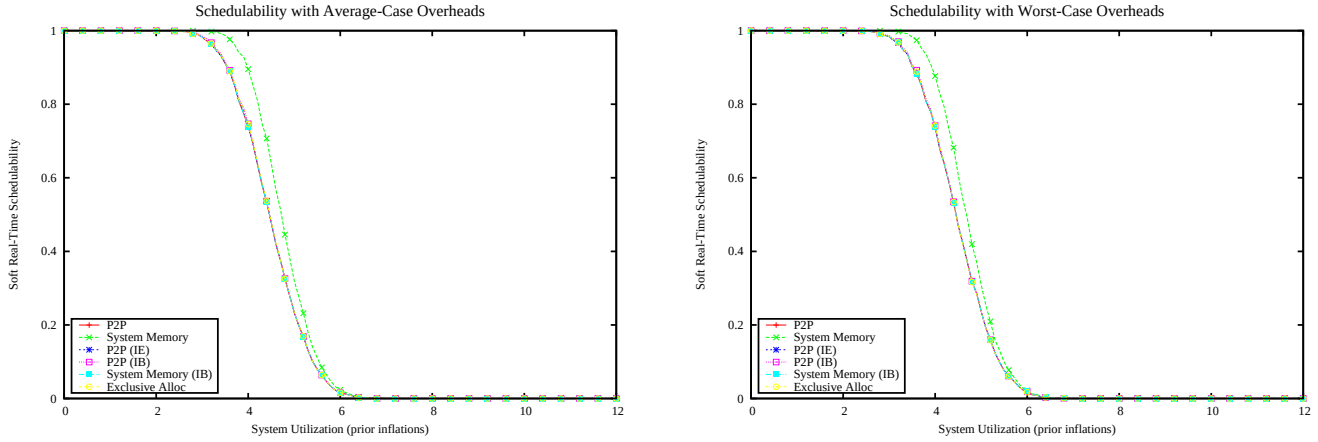

Figure 3388: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

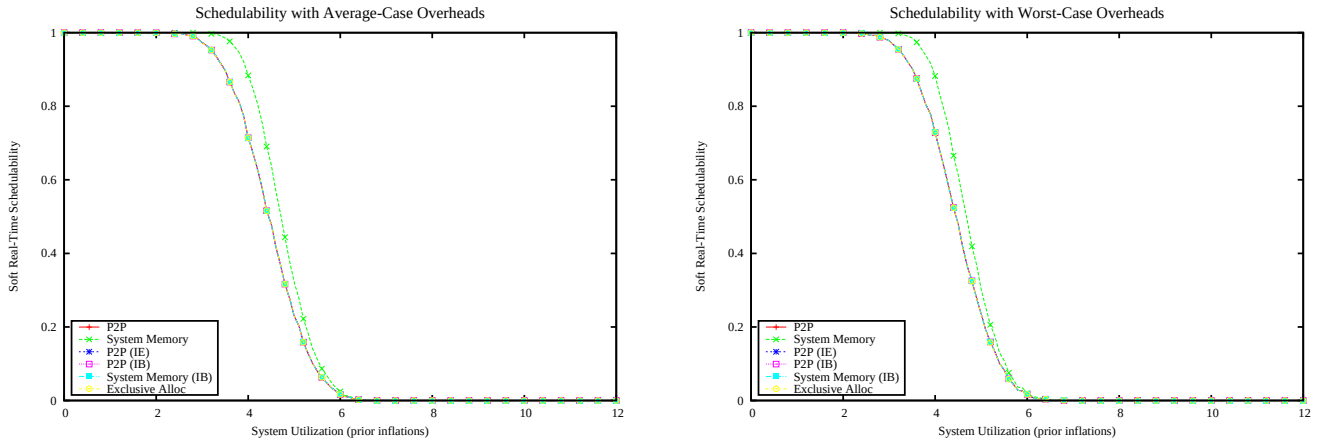

Figure 3389: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

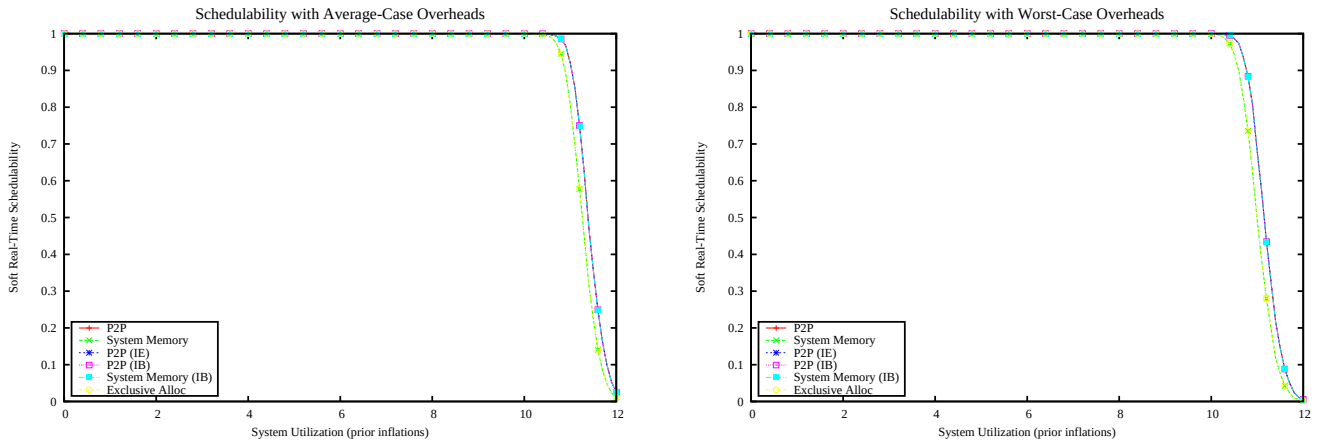

Figure 3390: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

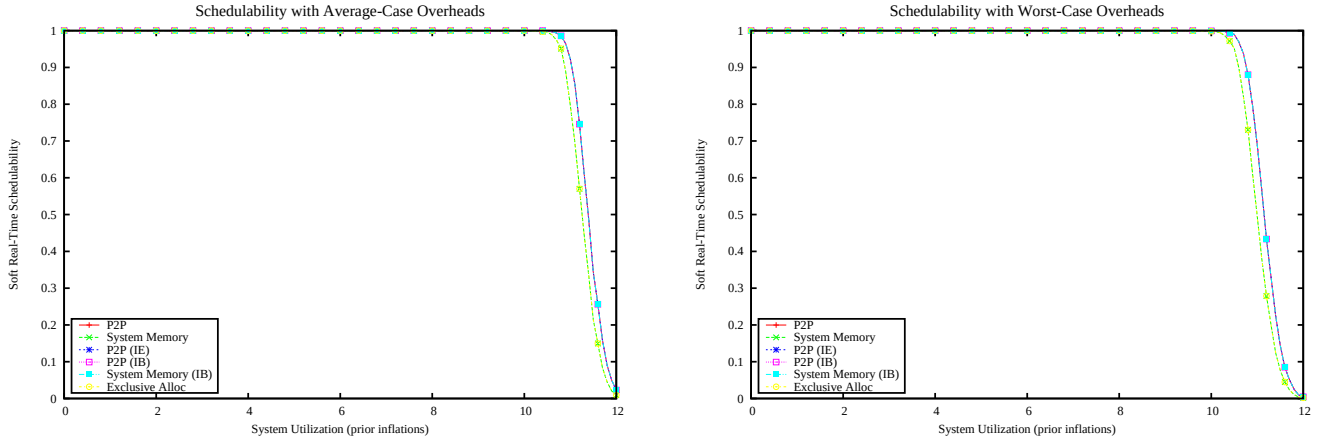

Figure 3391: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

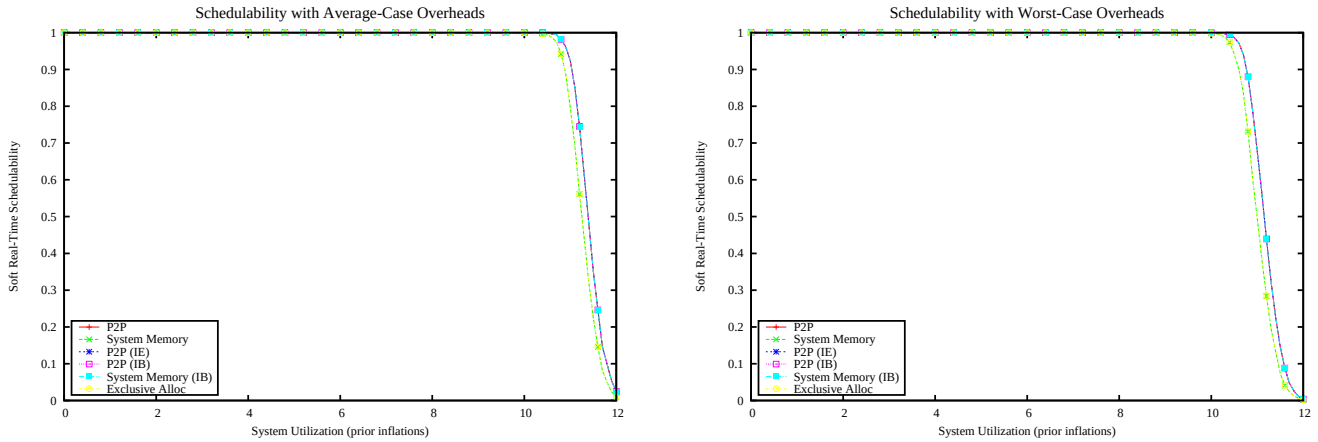

Figure 3392: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

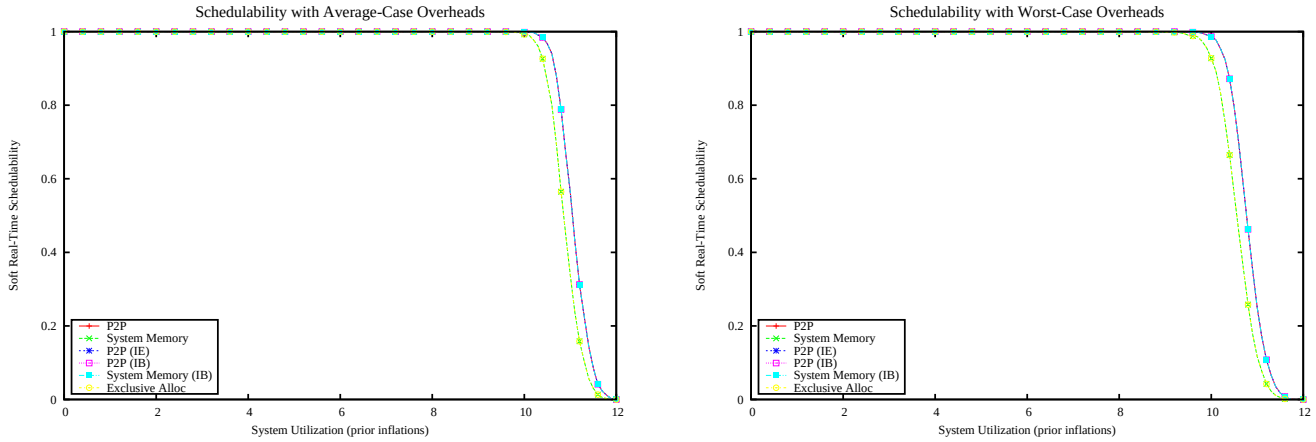

Figure 3393: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

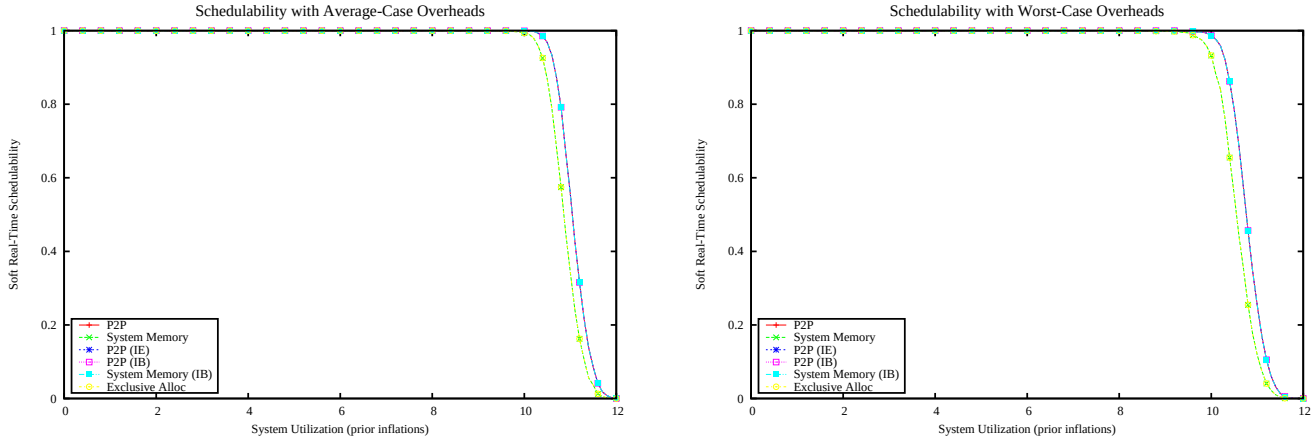

Figure 3394: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

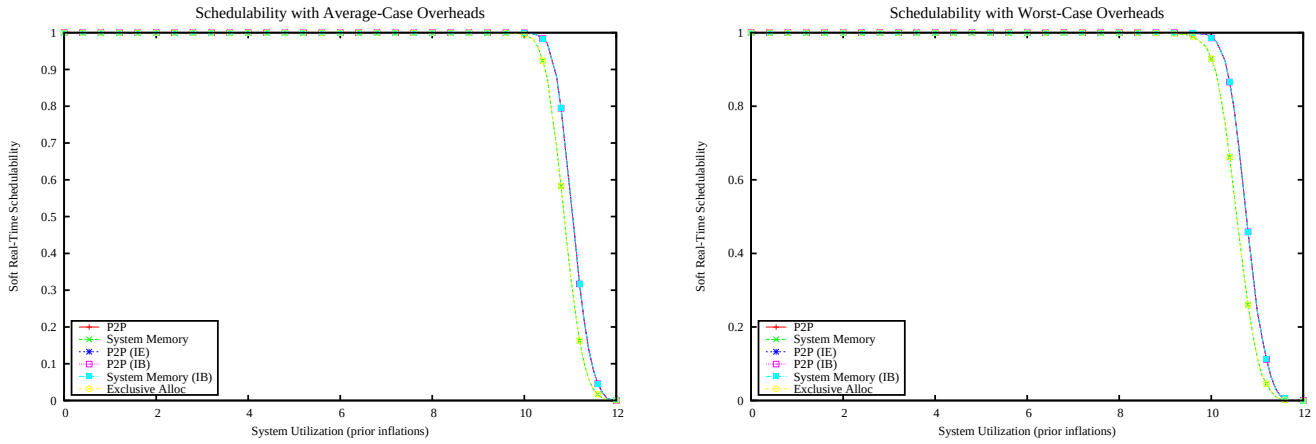

Figure 3395: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

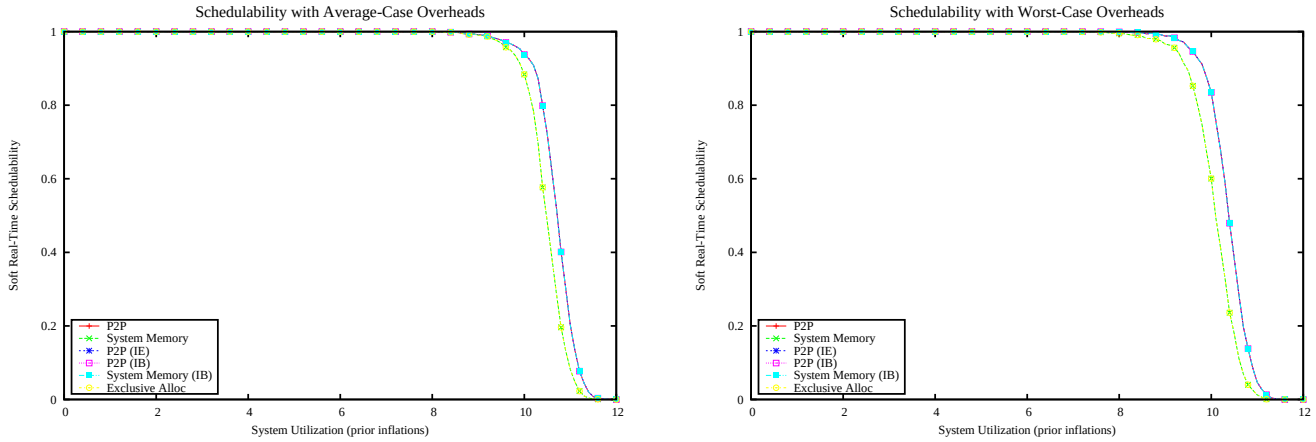

Figure 3396: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

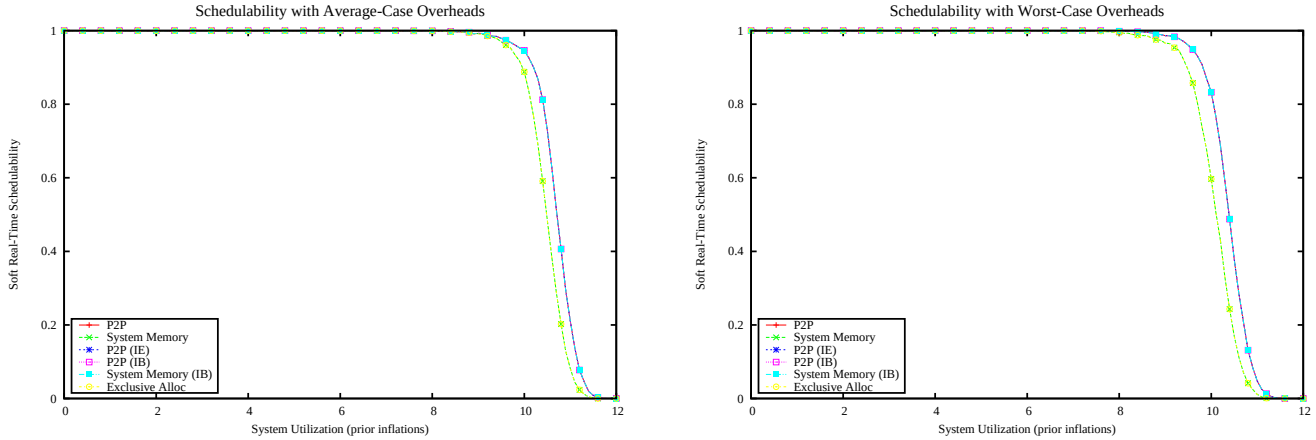

Figure 3397: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

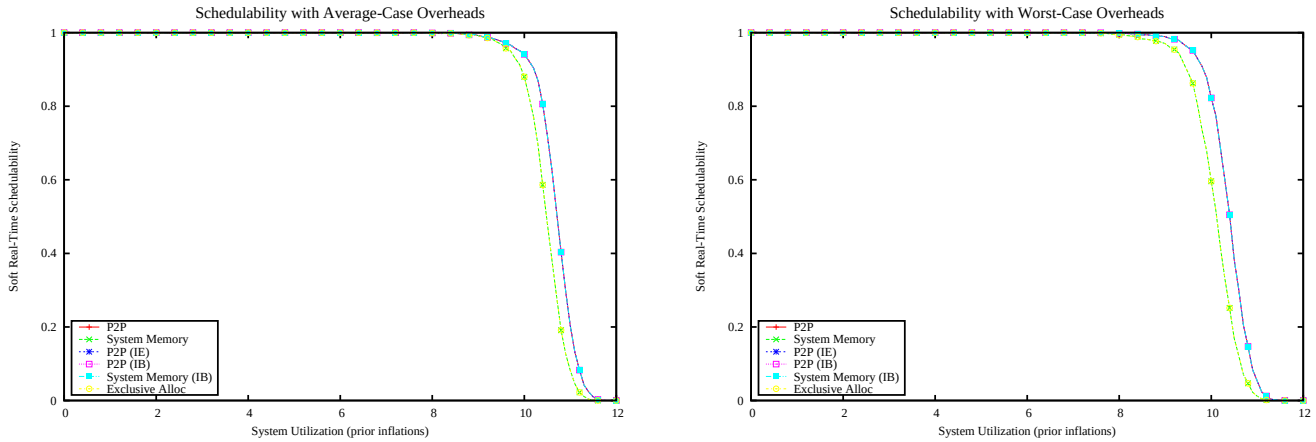

Figure 3398: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

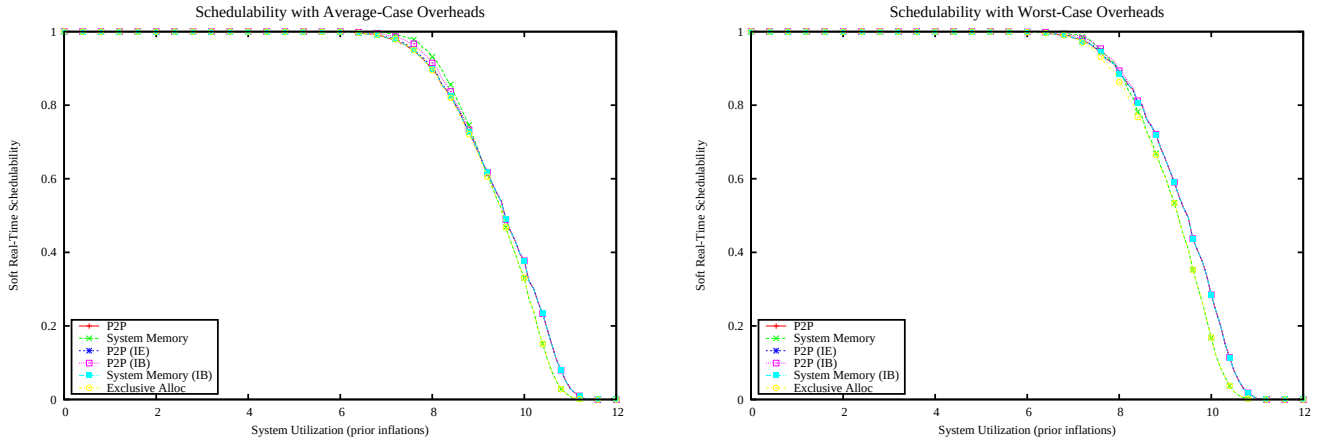

Figure 3399: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

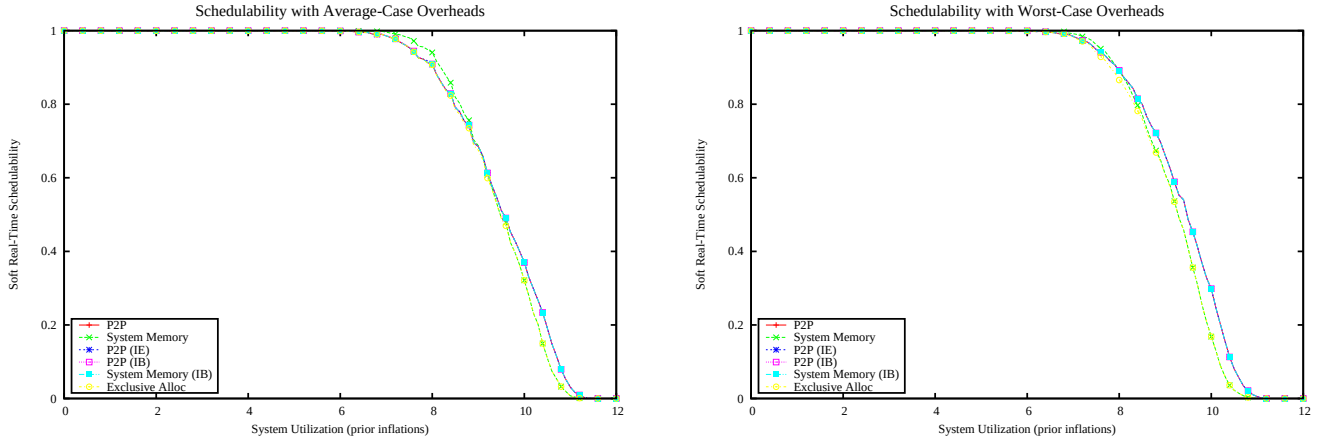

Figure 3400: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

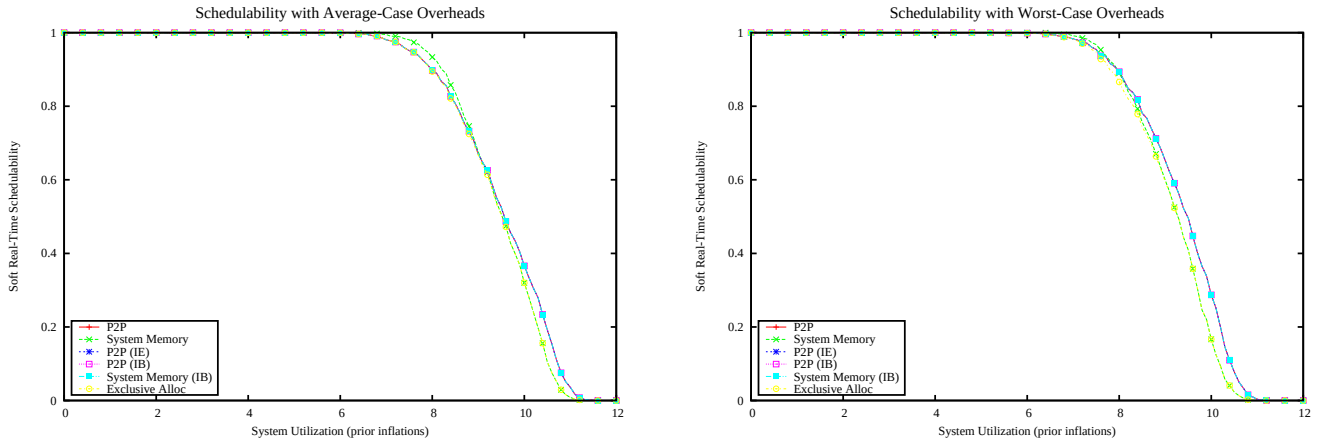

Figure 3401: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

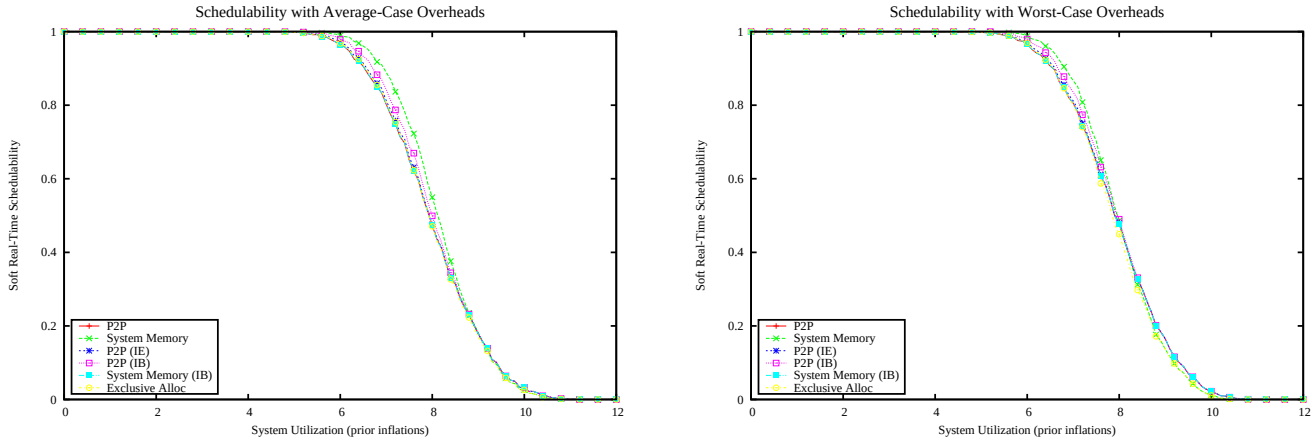

Figure 3402: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

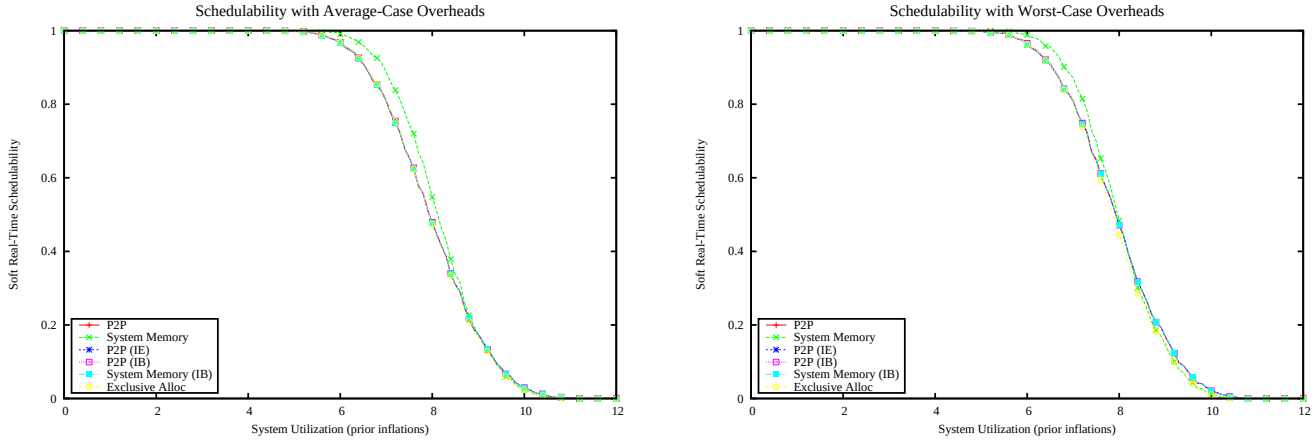

Figure 3403: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

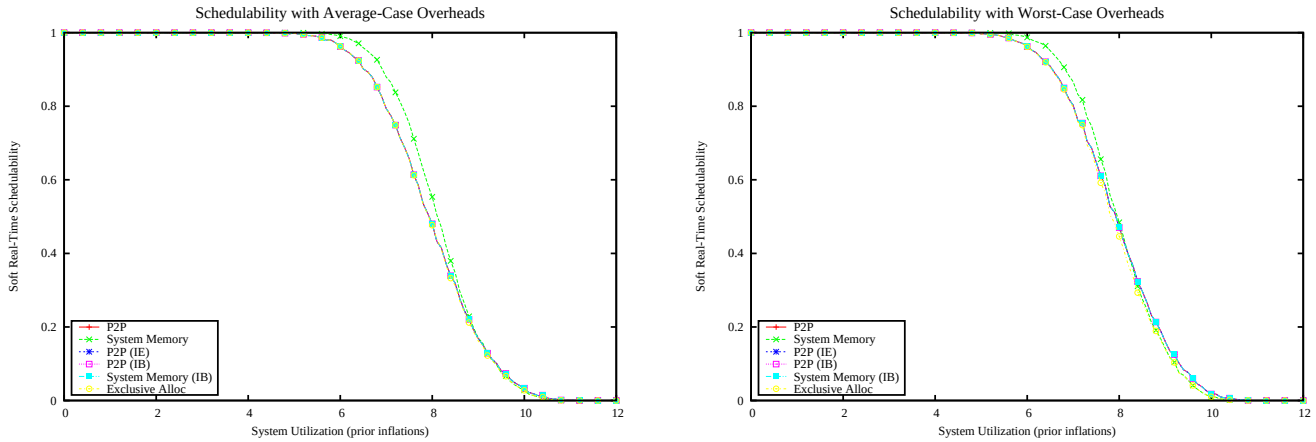

Figure 3404: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

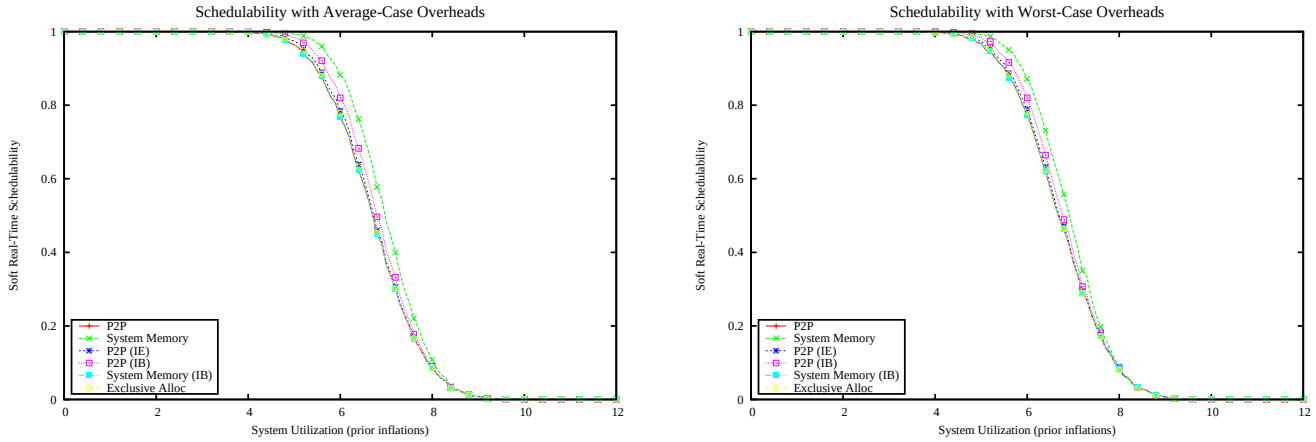

Figure 3405: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

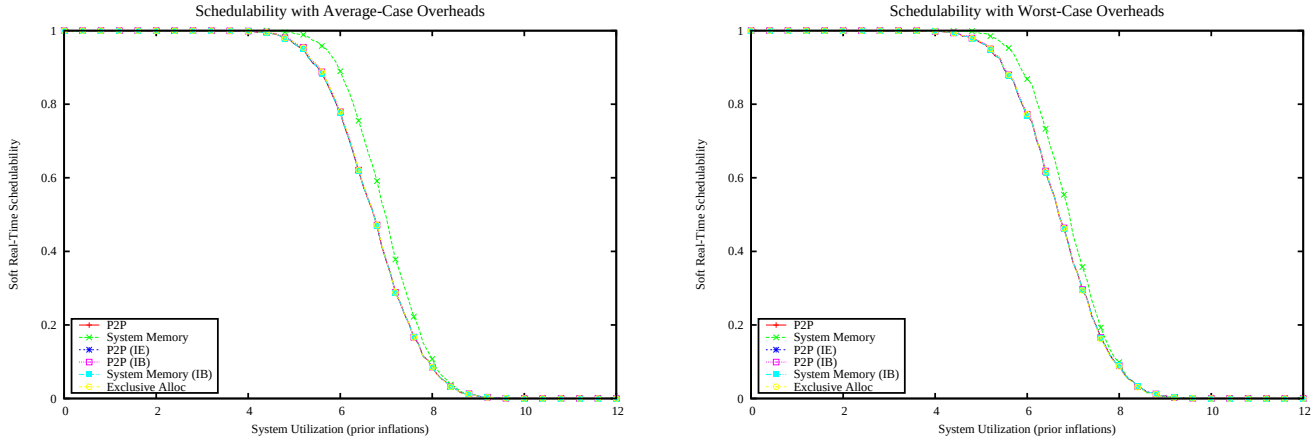

Figure 3406: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

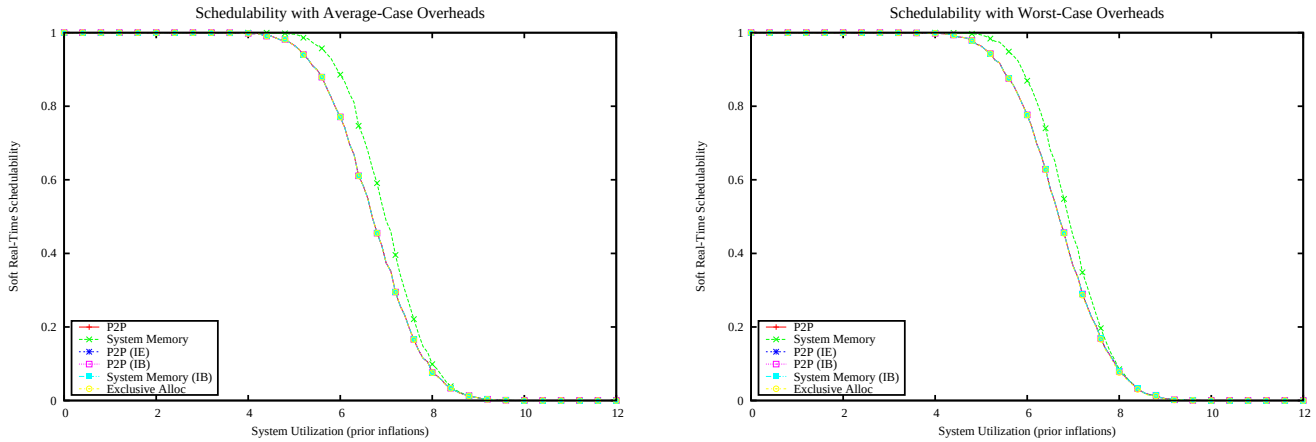

Figure 3407: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

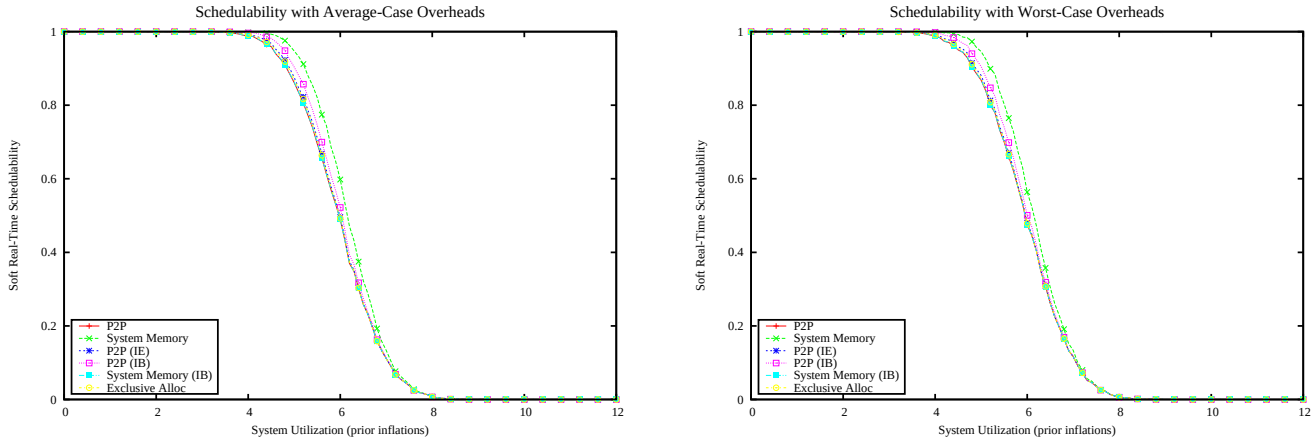

Figure 3408: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

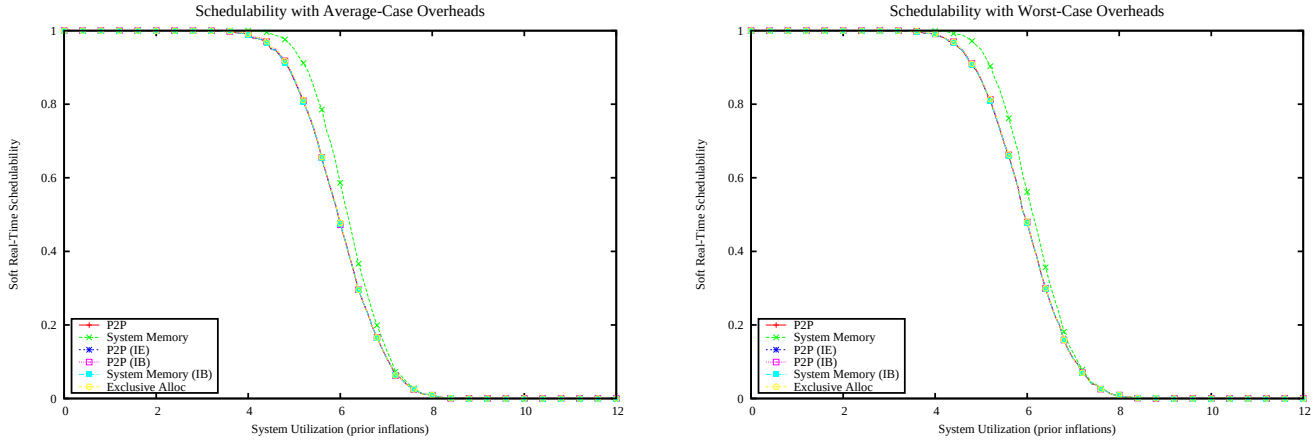

Figure 3409: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

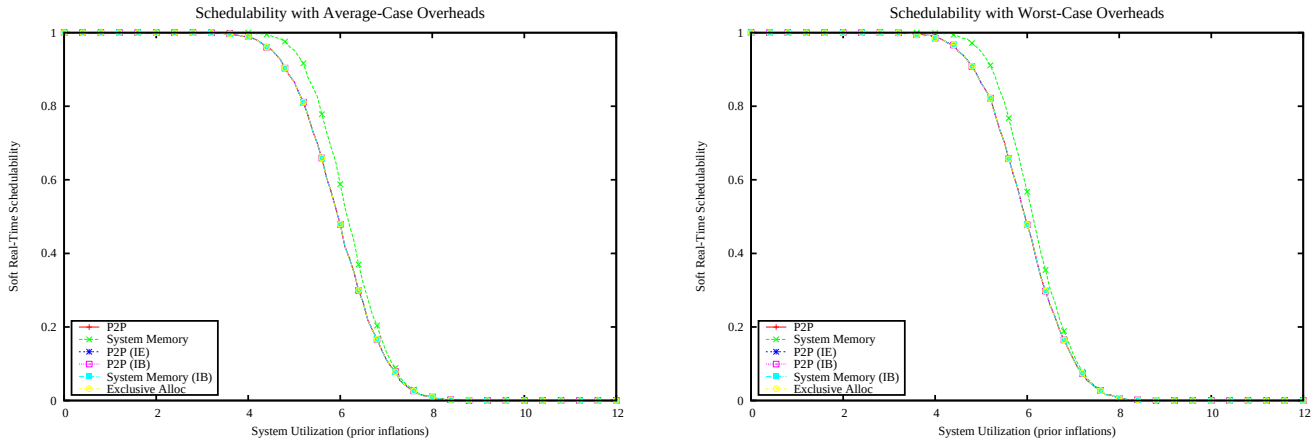

Figure 3410: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

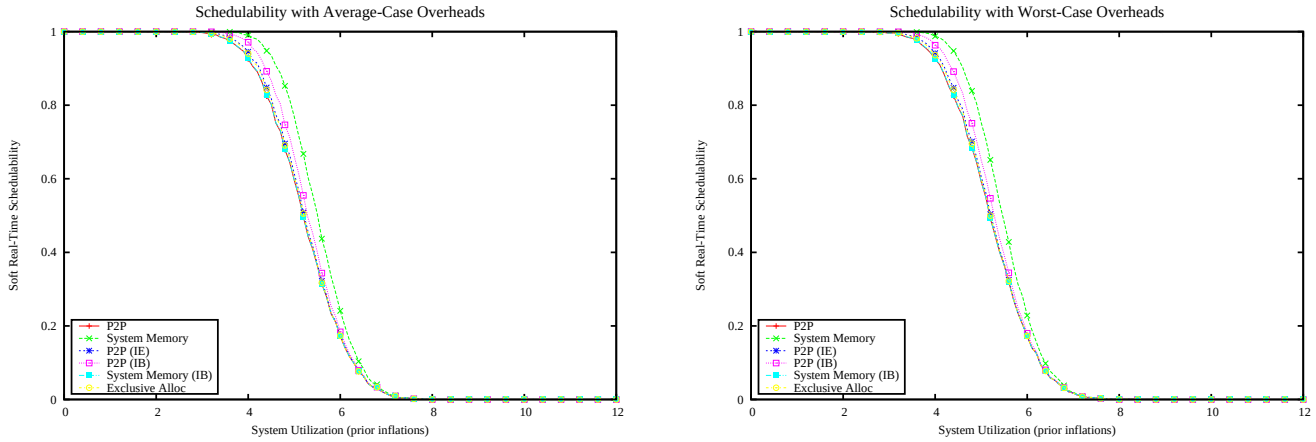

Figure 3411: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

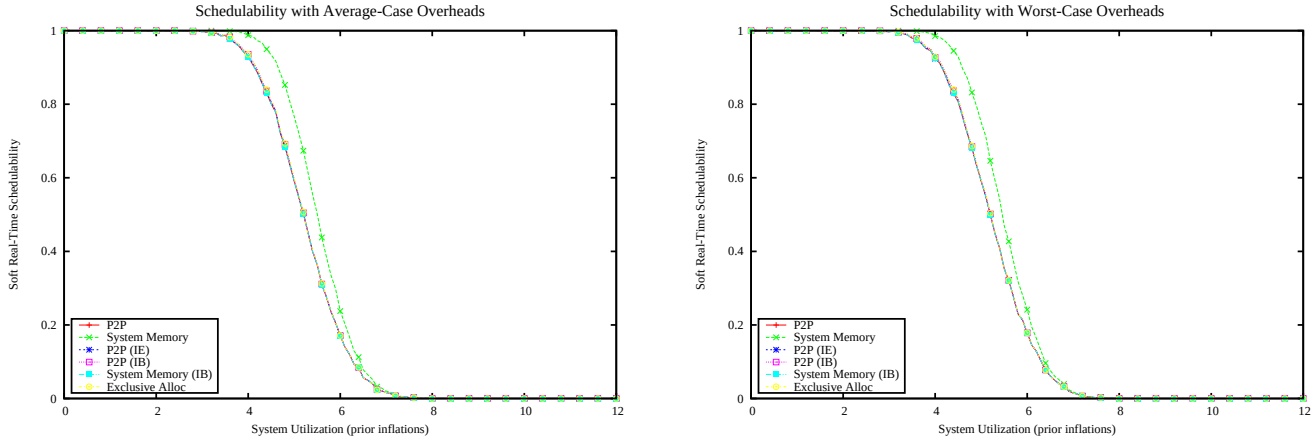

Figure 3412: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

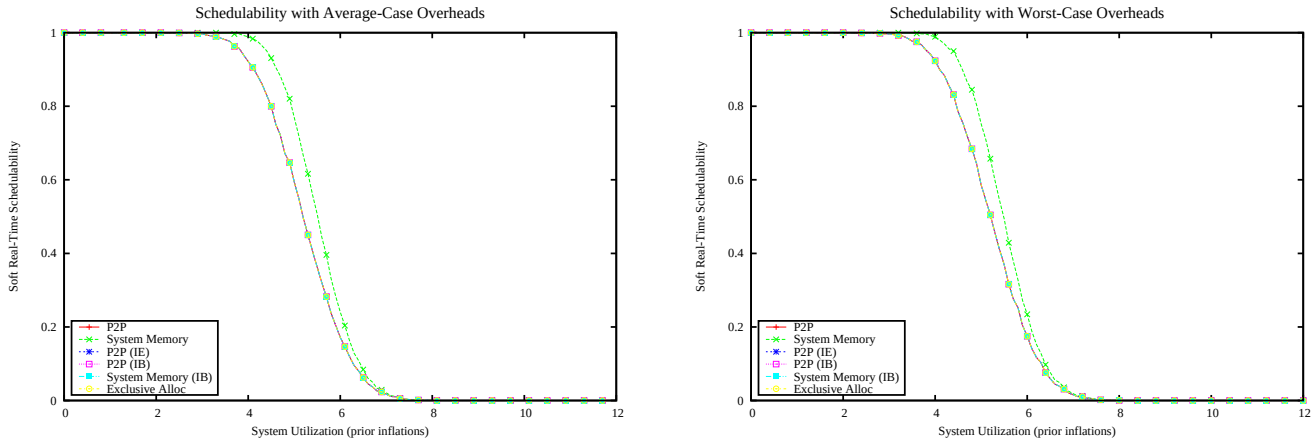

Figure 3413: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

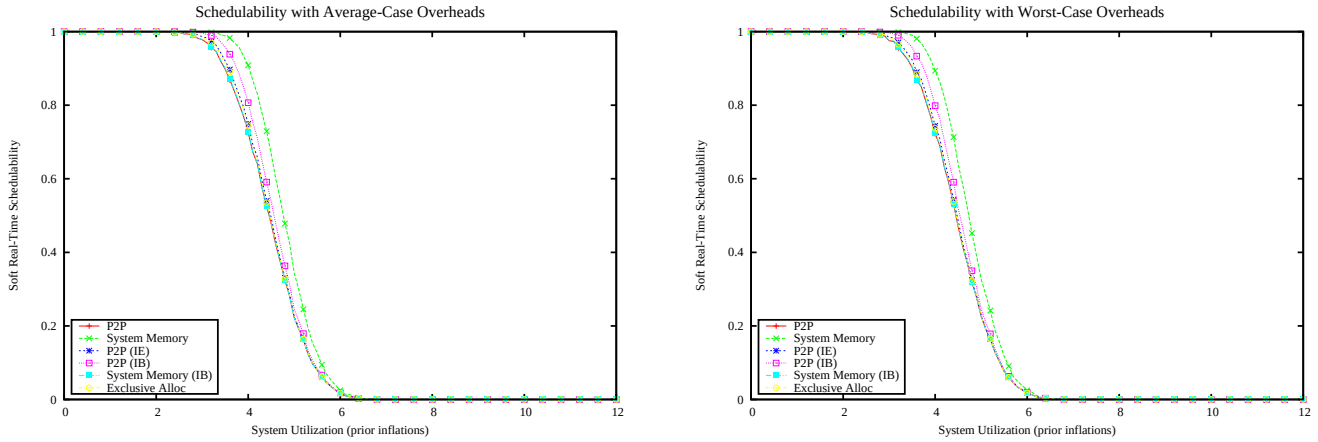

Figure 3414: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

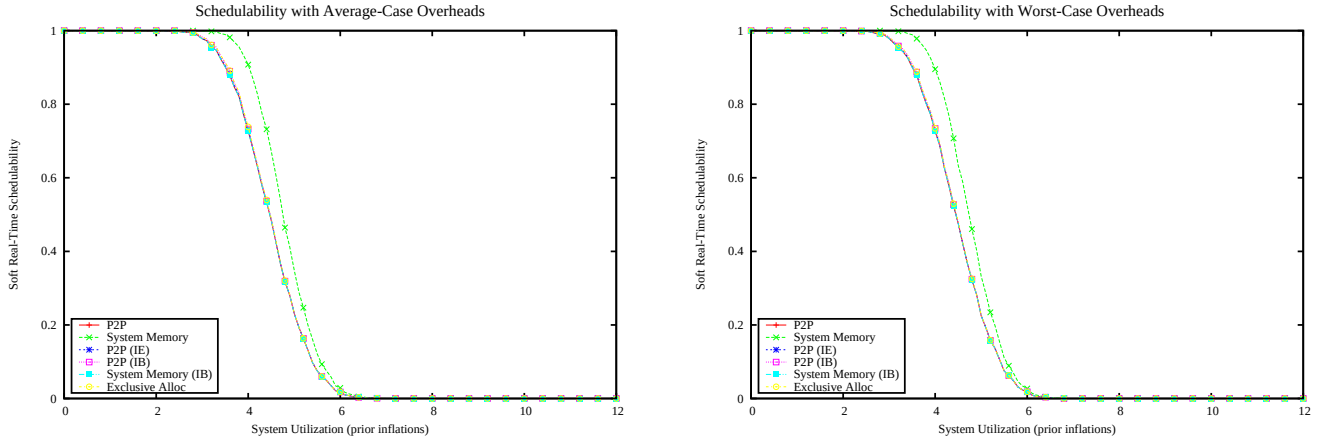

Figure 3415: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

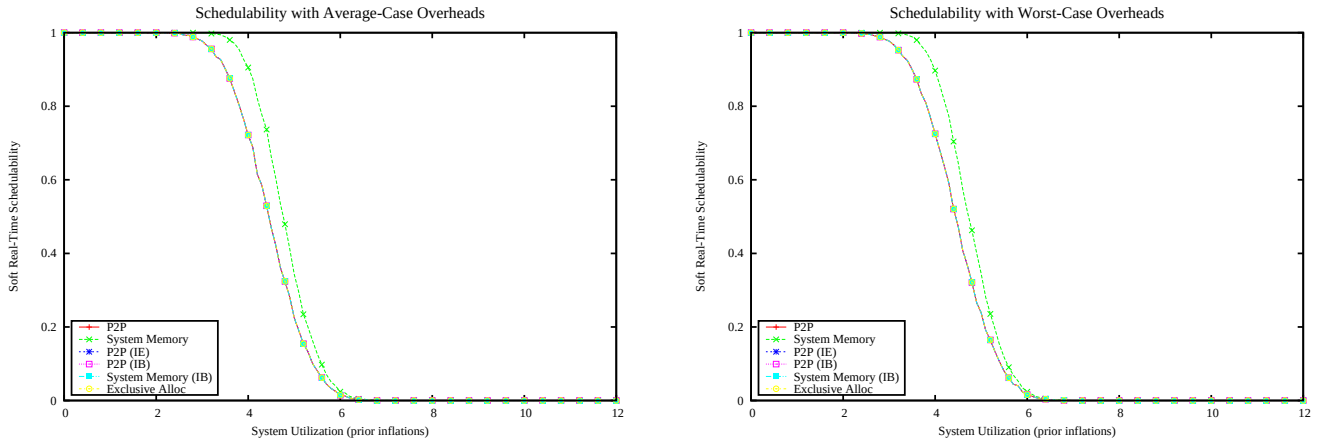

Figure 3416: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

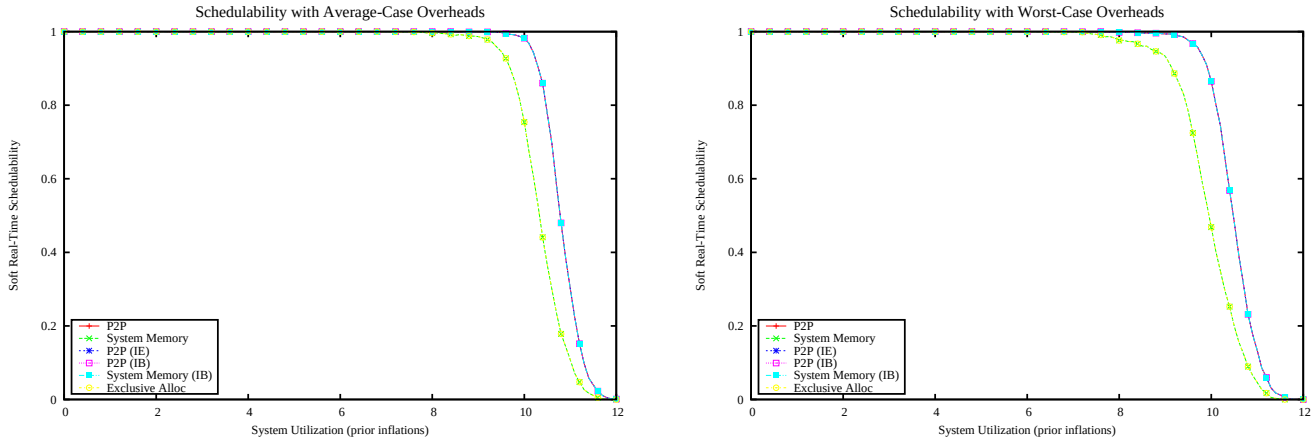

Figure 3417: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

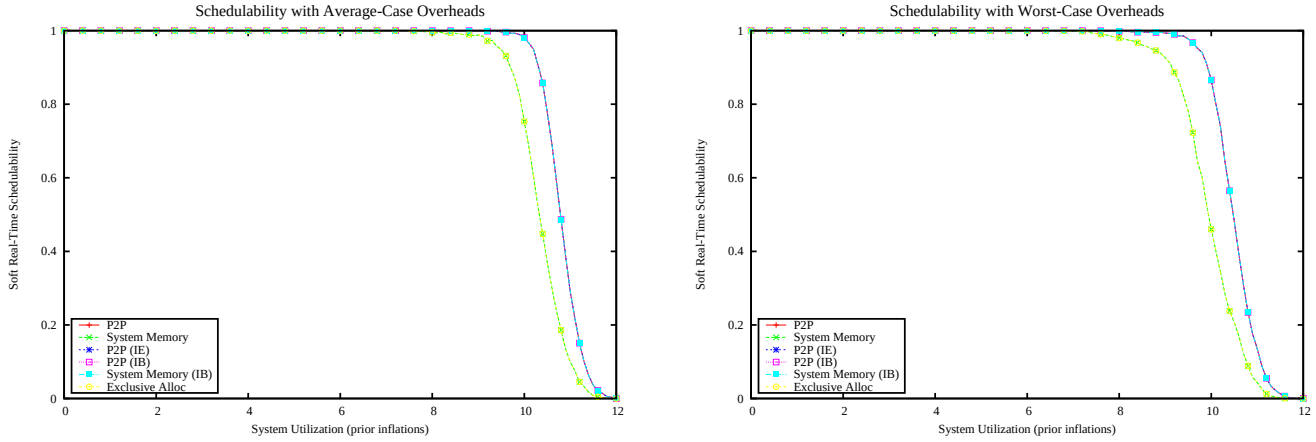

Figure 3418: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

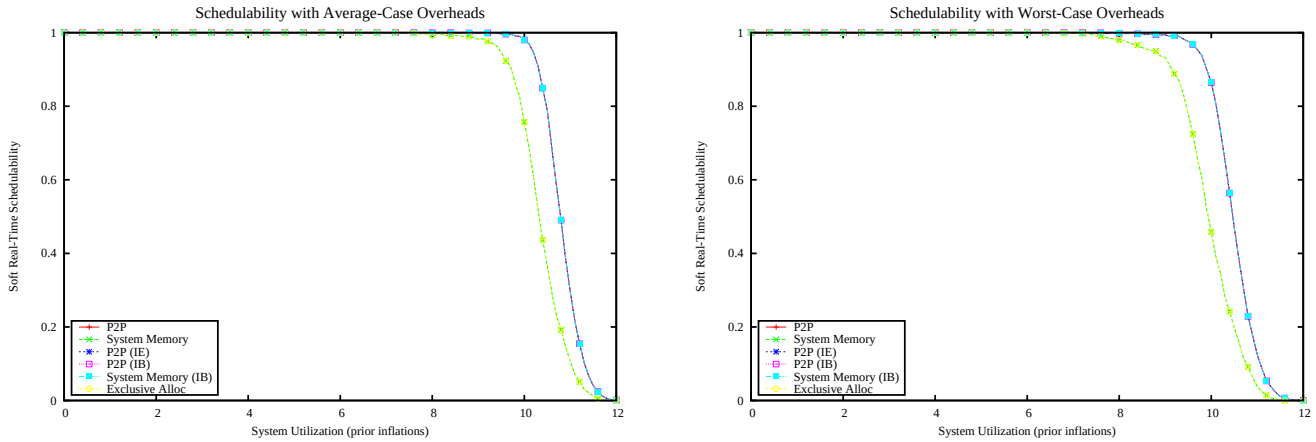

Figure 3419: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

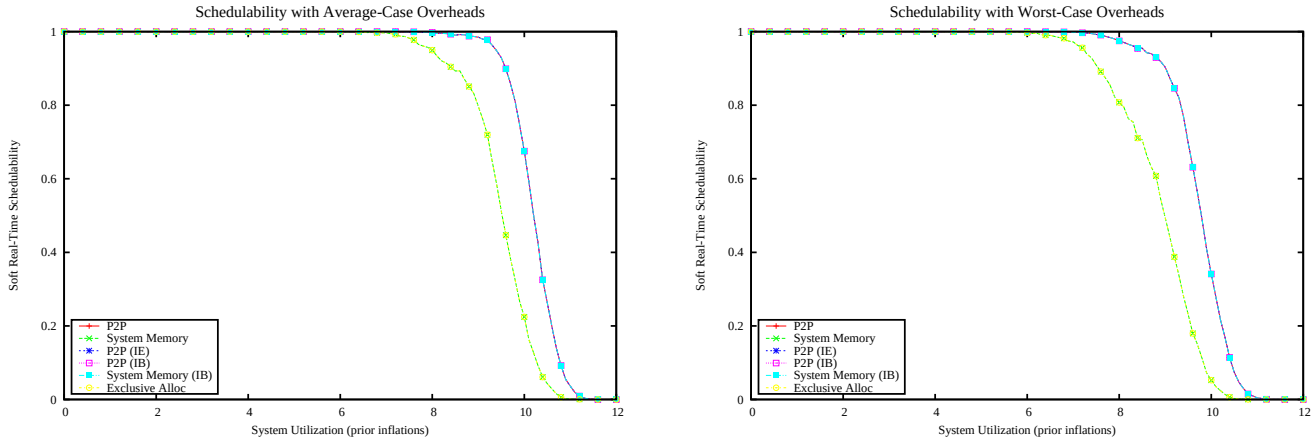

Figure 3420: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

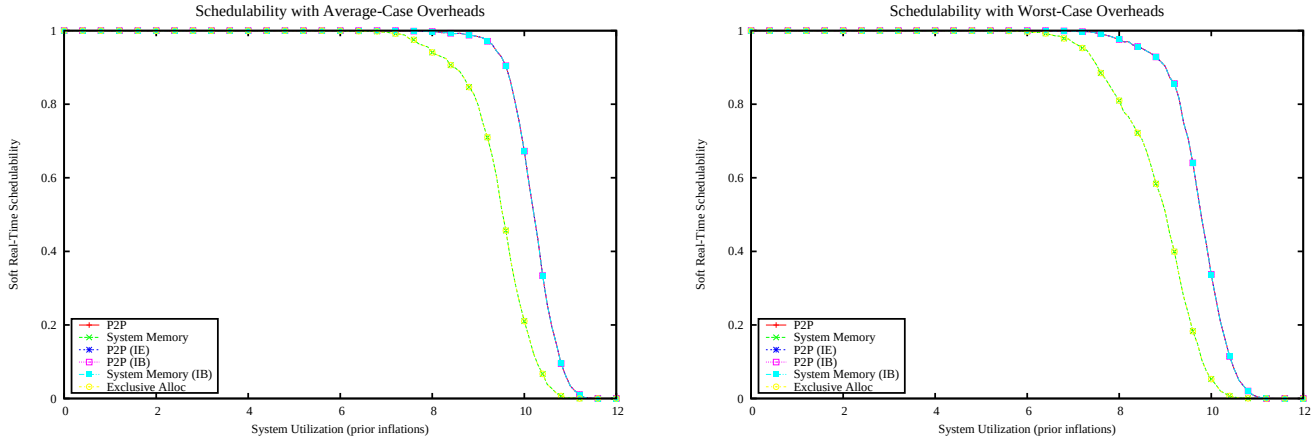

Figure 3421: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

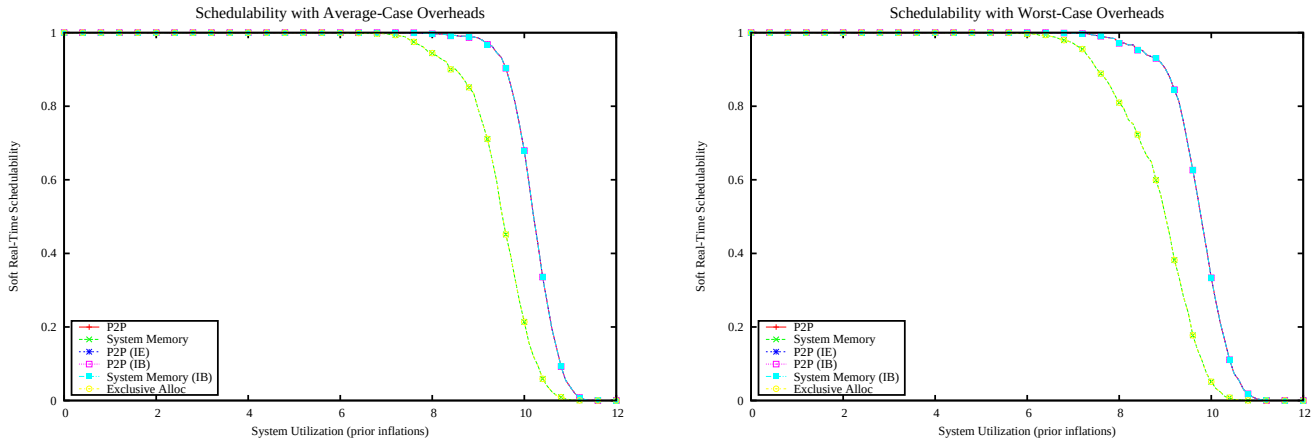

Figure 3422: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

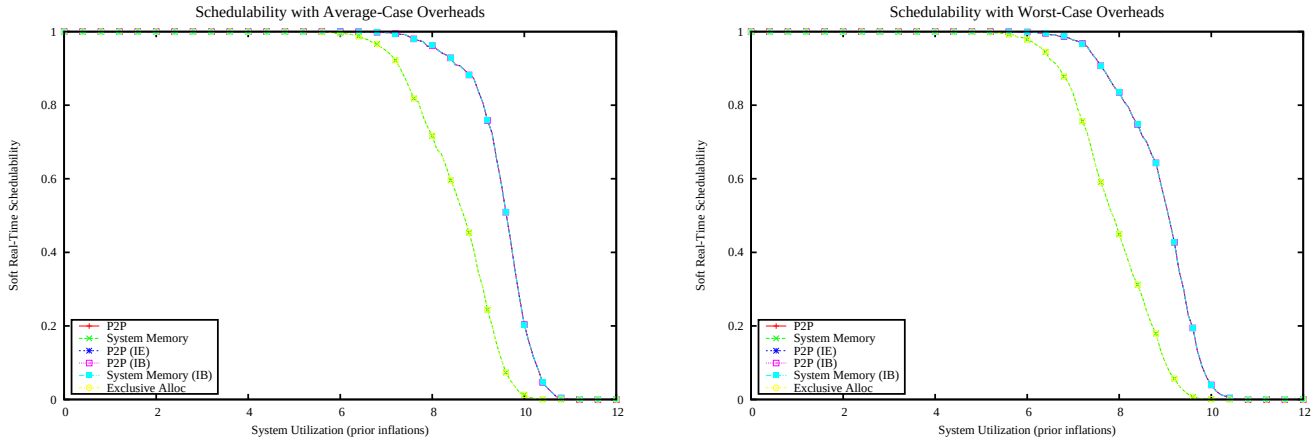

Figure 3423: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

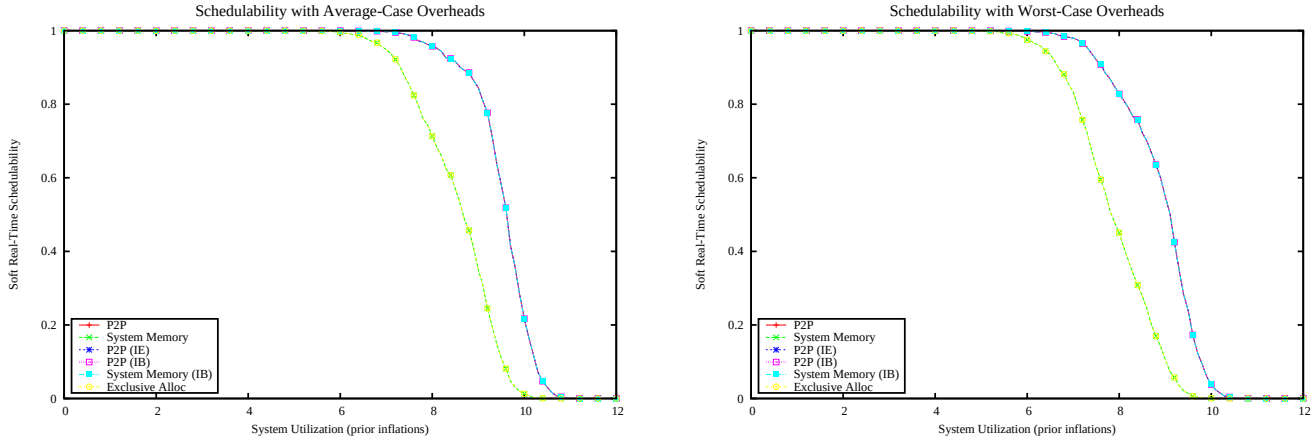

Figure 3424: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

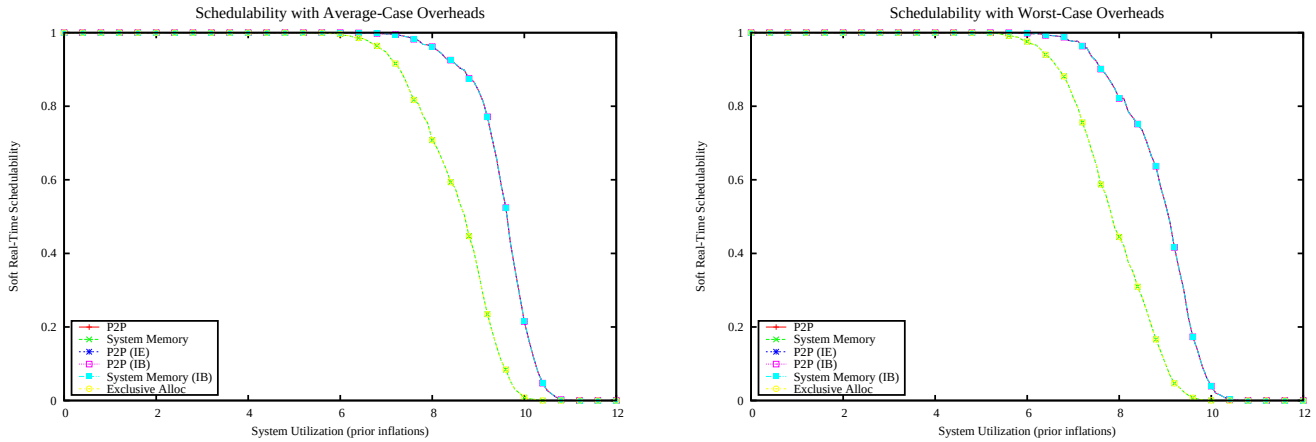

Figure 3425: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

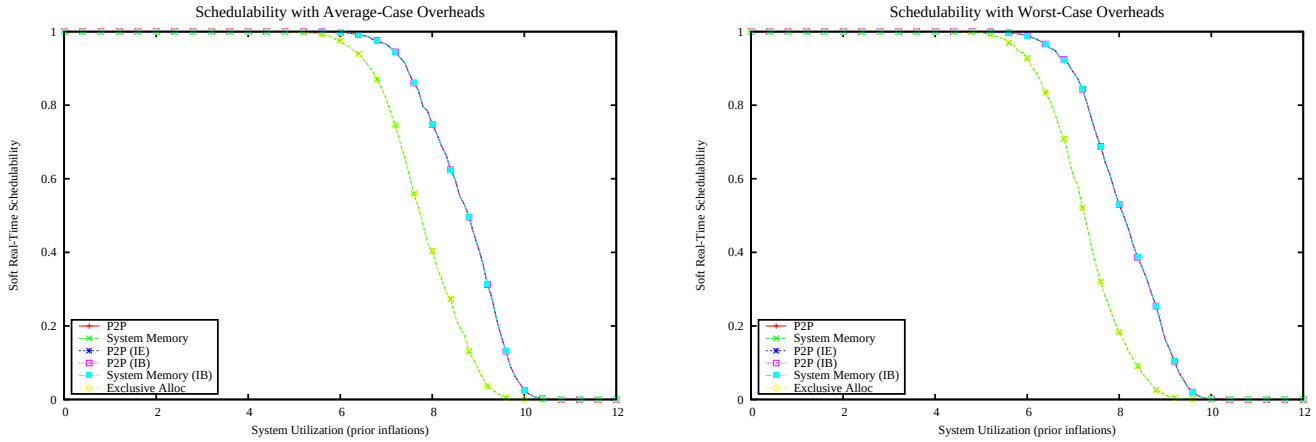

Figure 3426: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

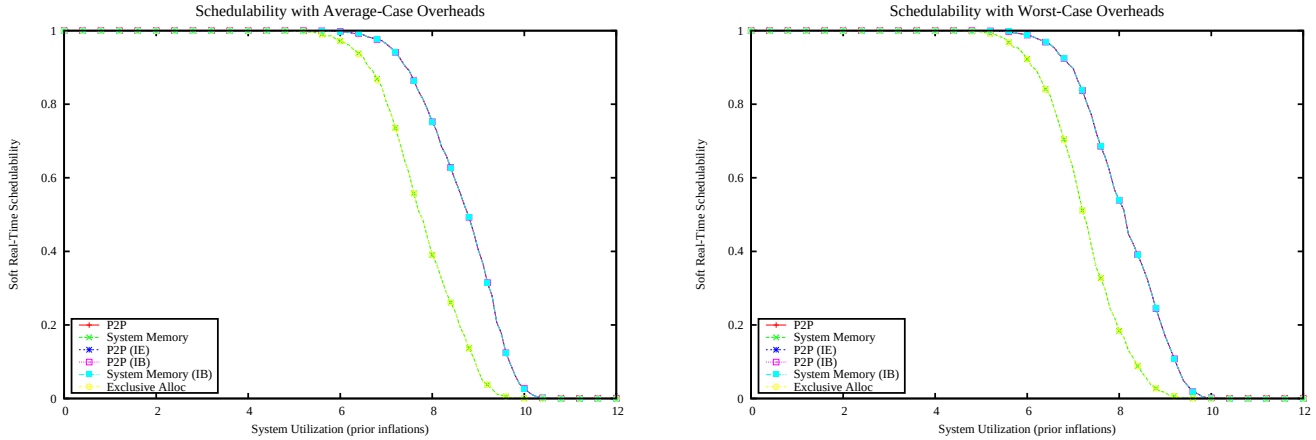

Figure 3427: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

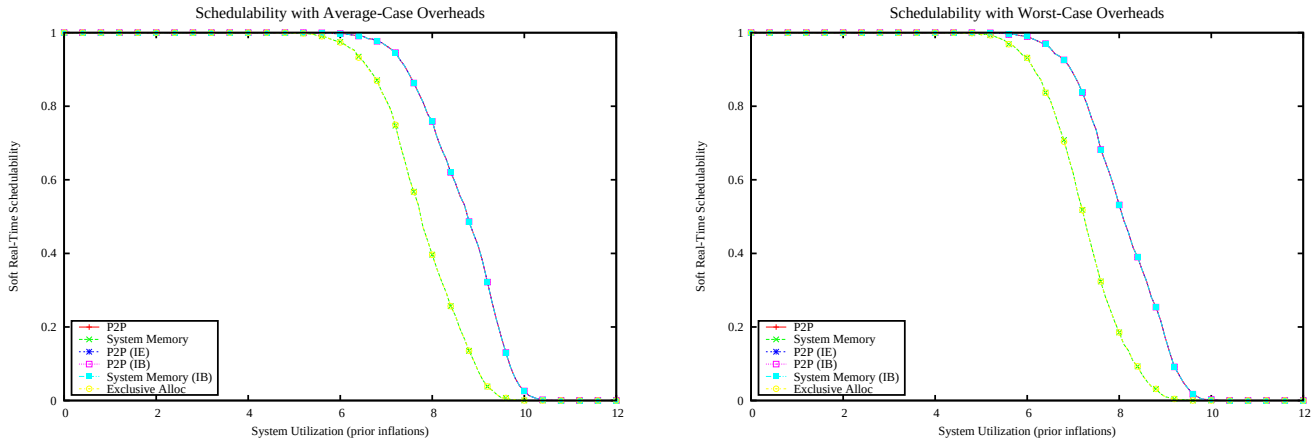

Figure 3428: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

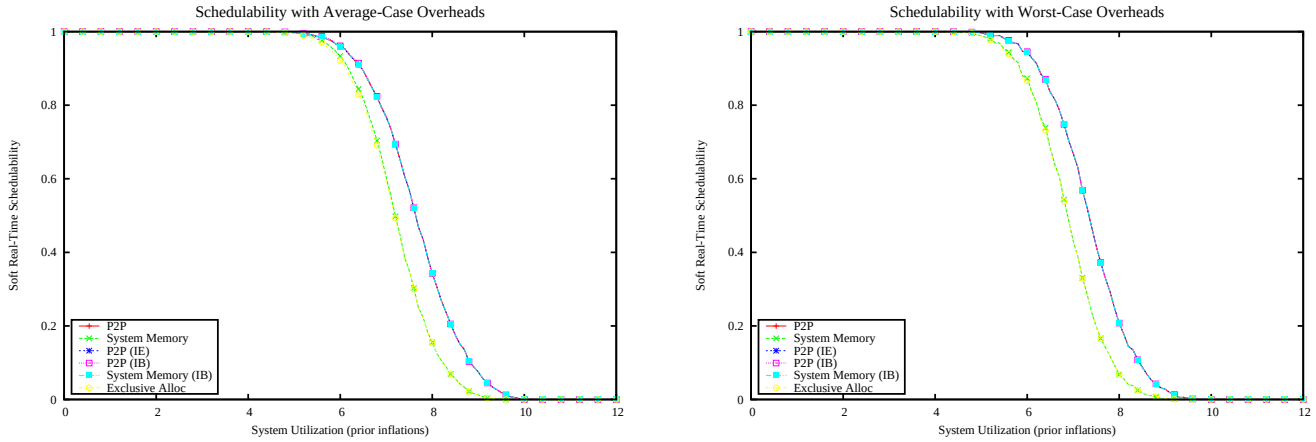

Figure 3429: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

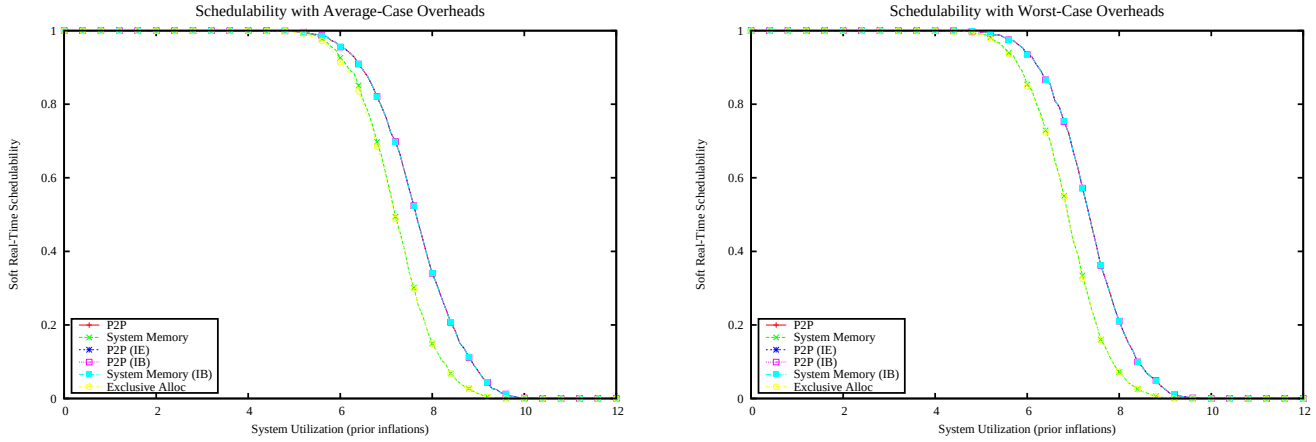

Figure 3430: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

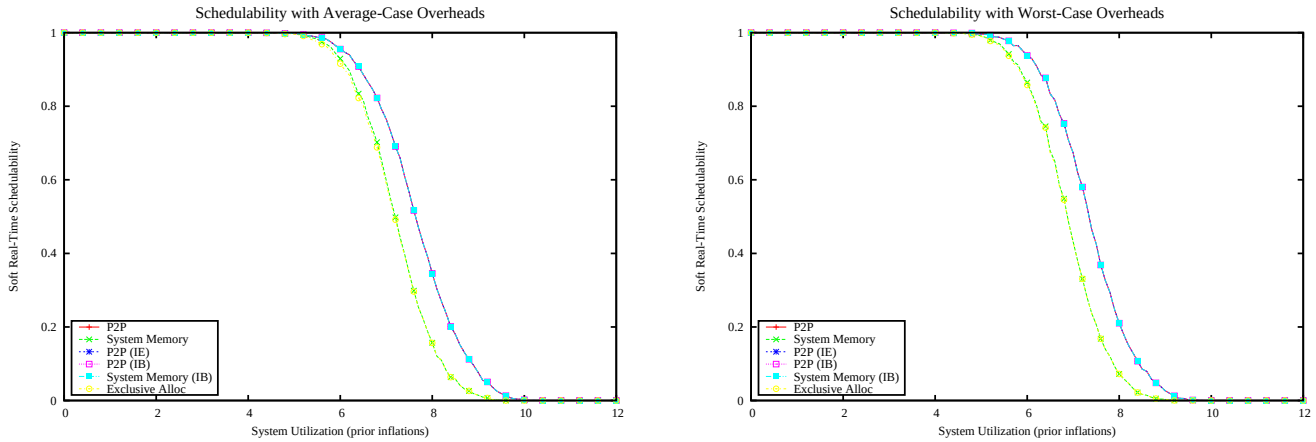

Figure 3431: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

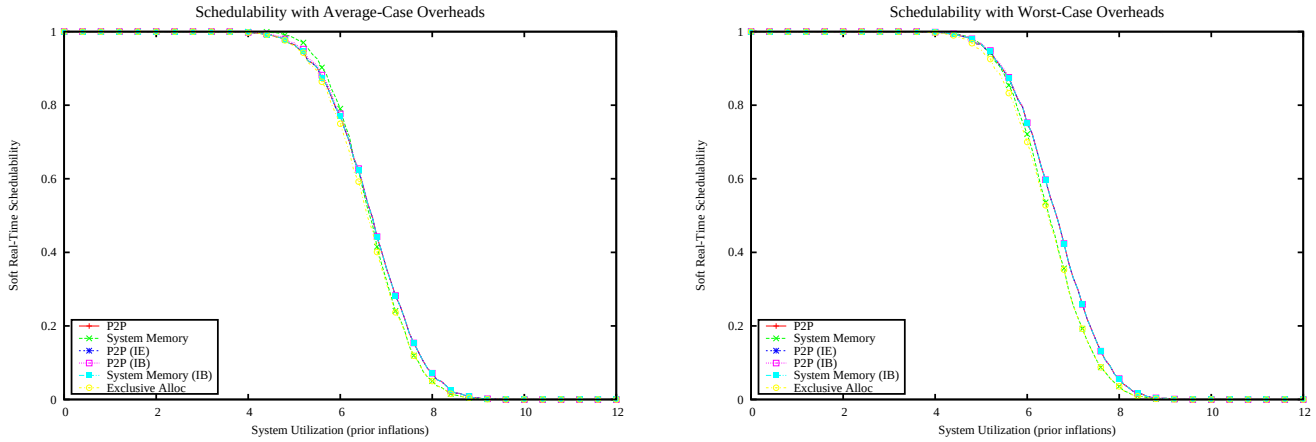

Figure 3432: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

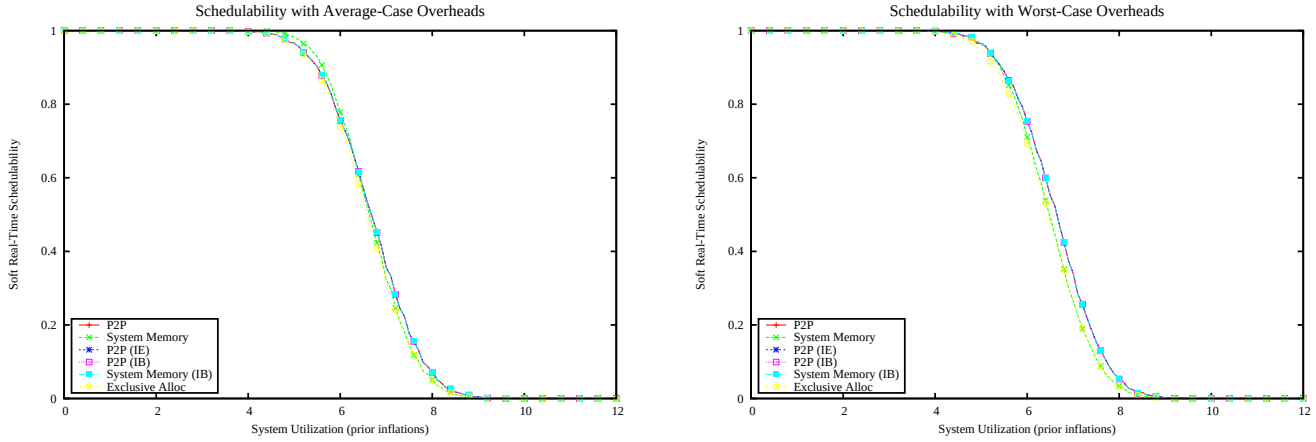

Figure 3433: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

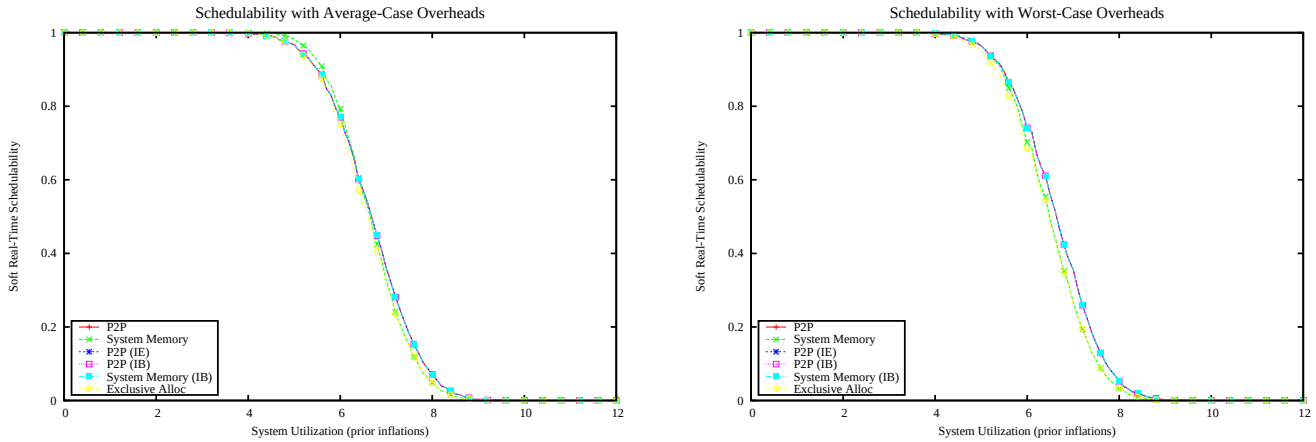

Figure 3434: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

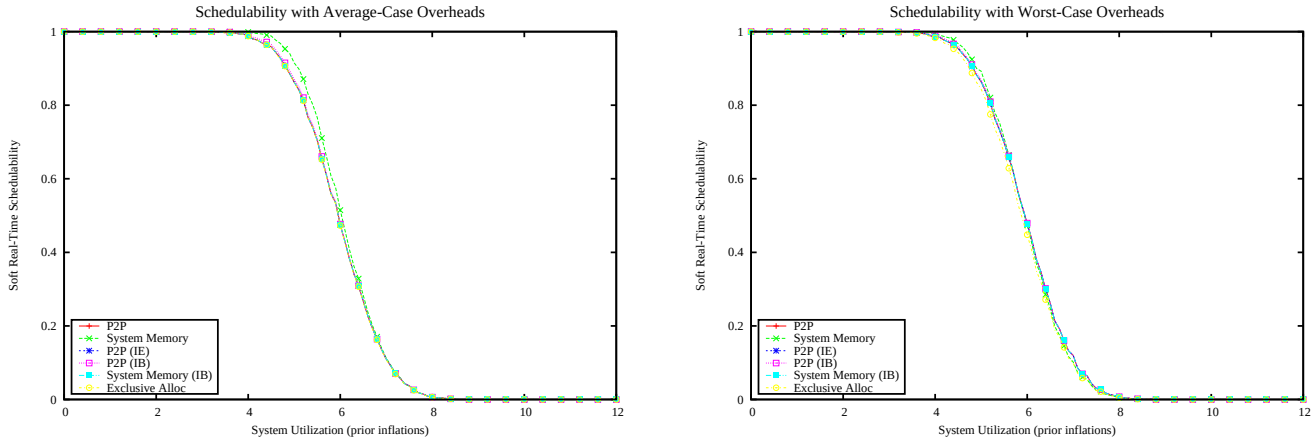

Figure 3435: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

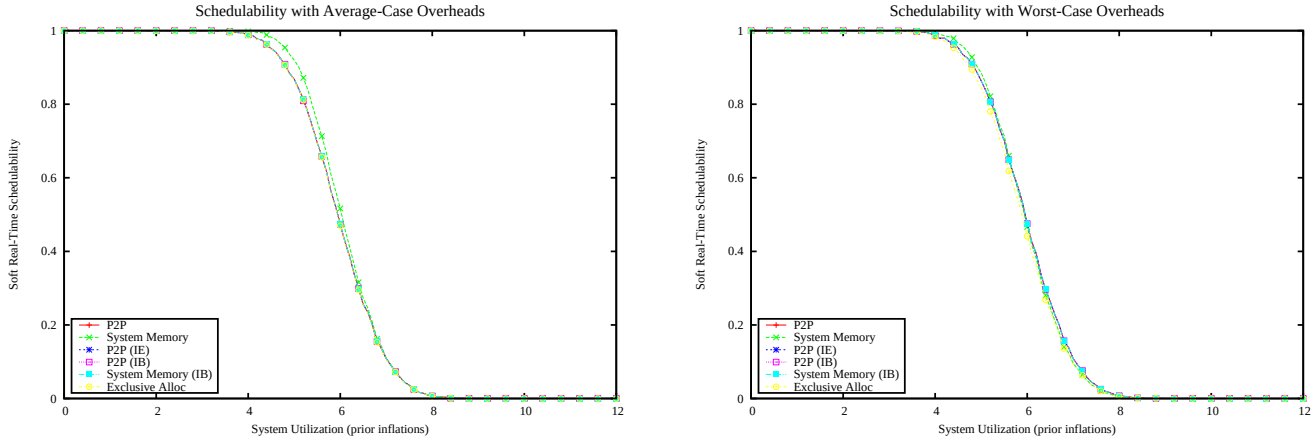

Figure 3436: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

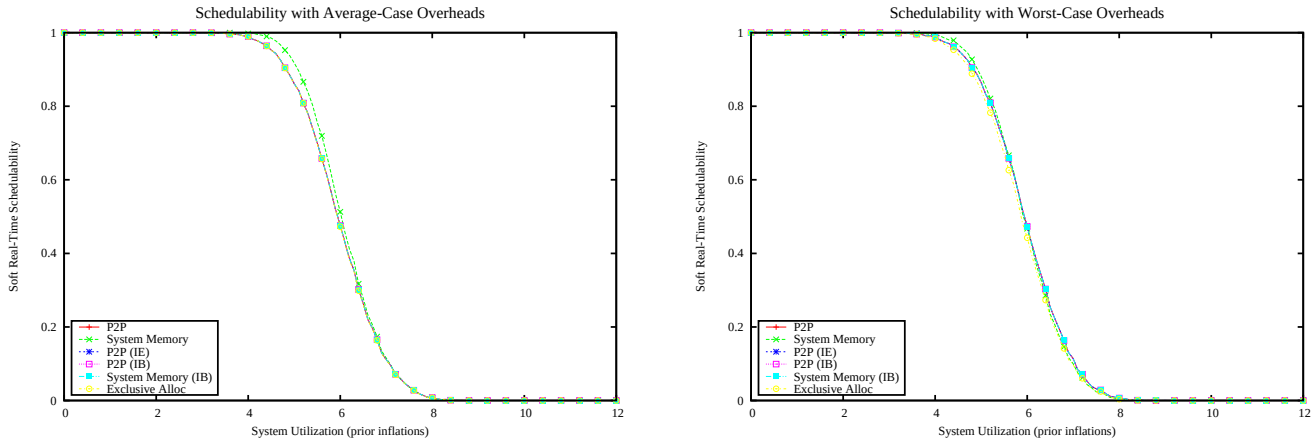

Figure 3437: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

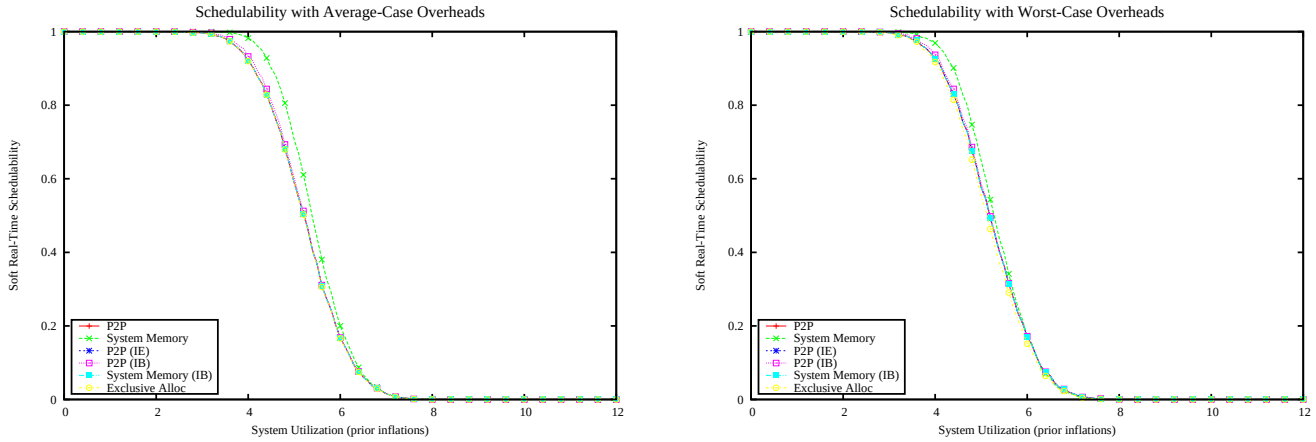

Figure 3438: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

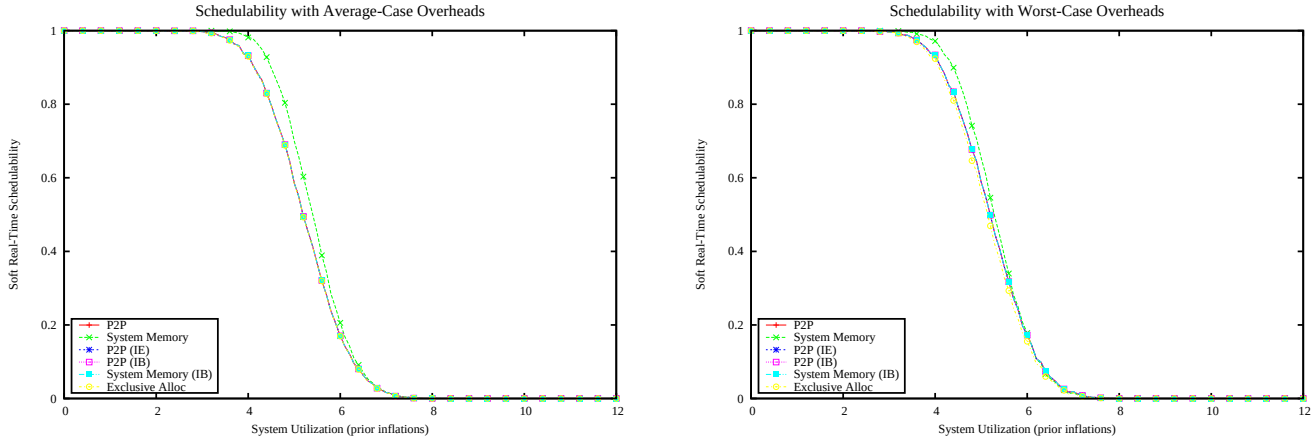

Figure 3439: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

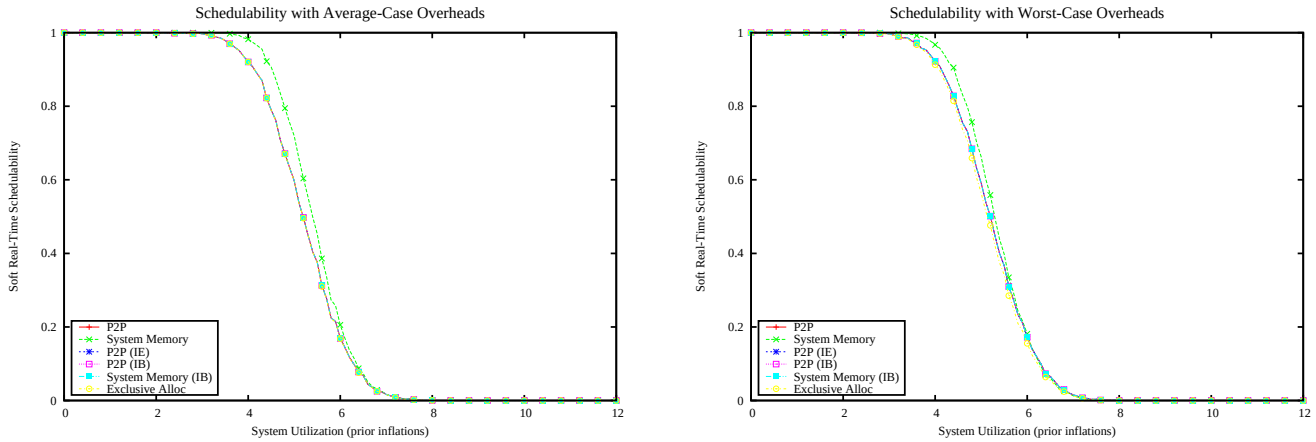

Figure 3440: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

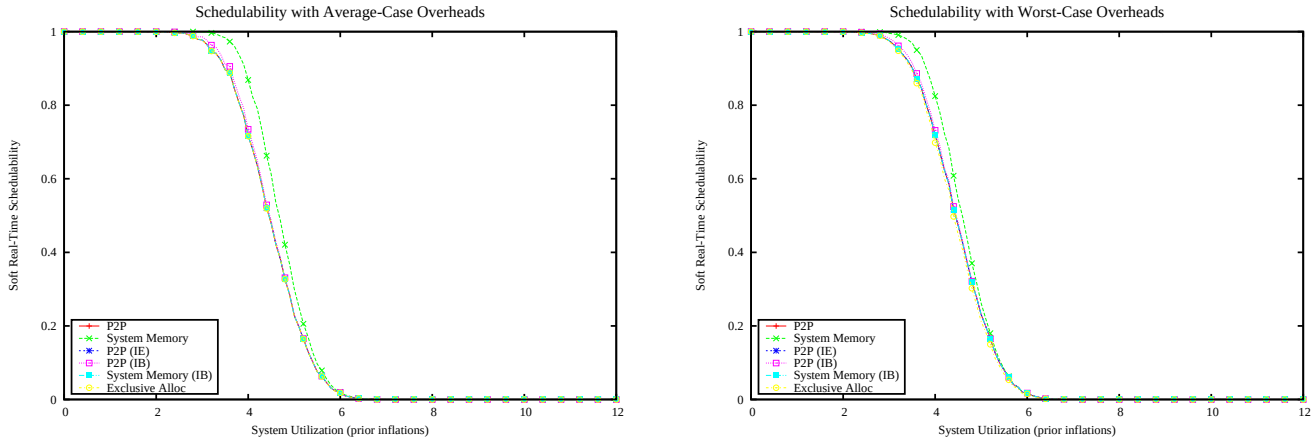

Figure 3441: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

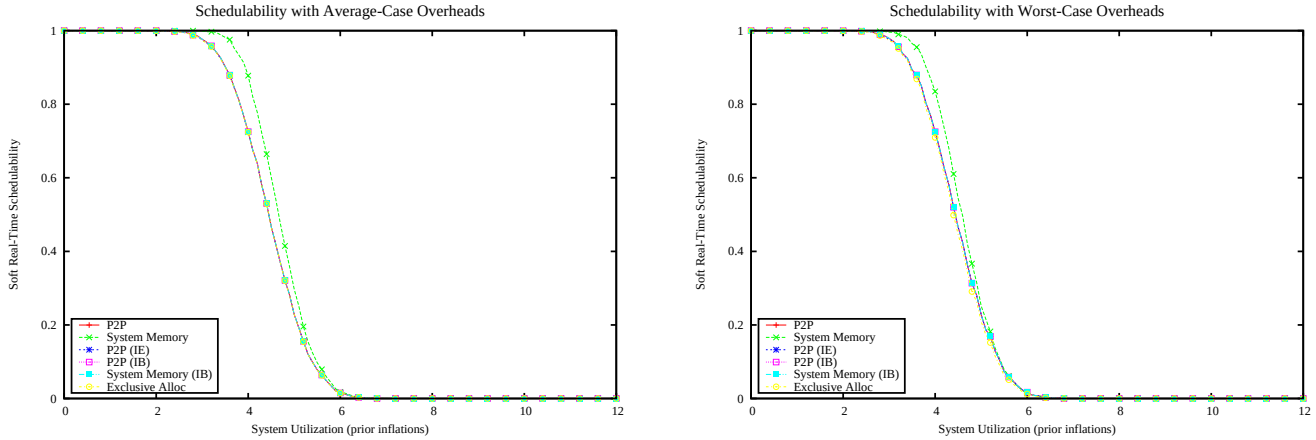

Figure 3442: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

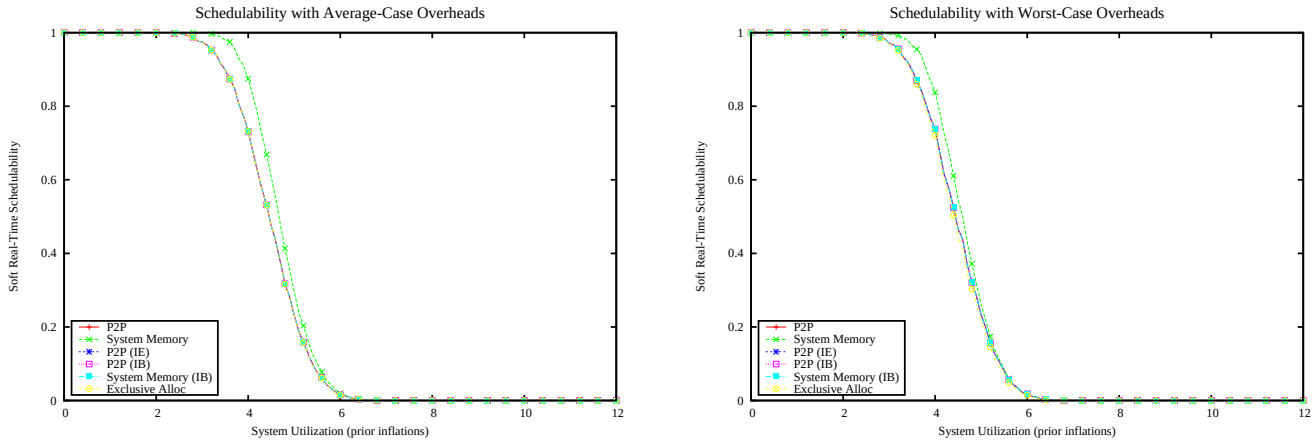

Figure 3443: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

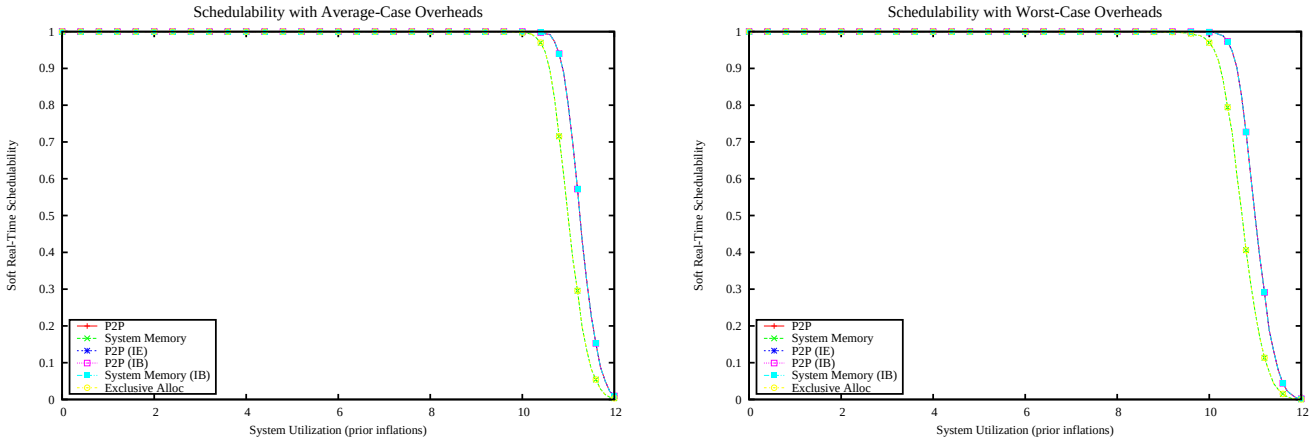

Figure 3444: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

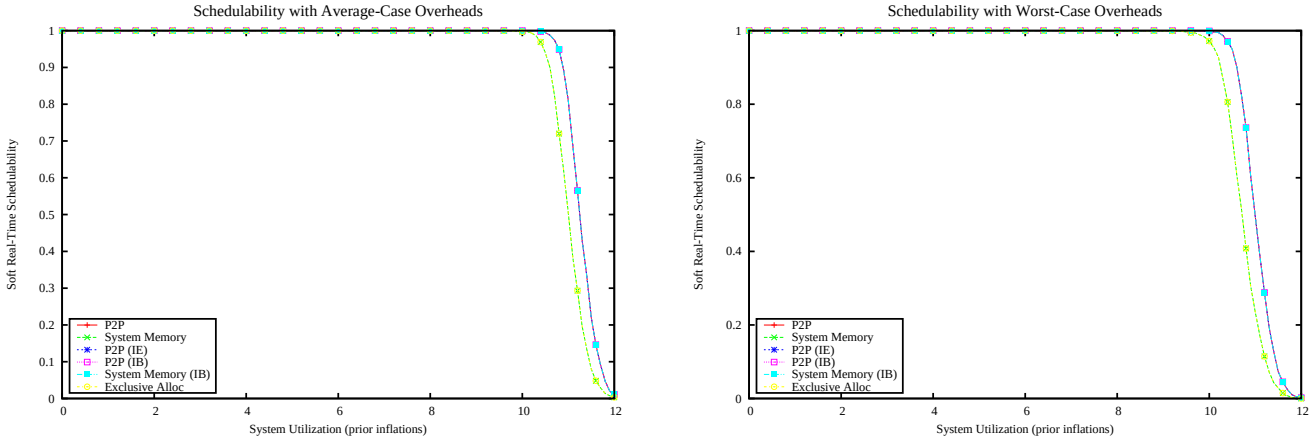

Figure 3445: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

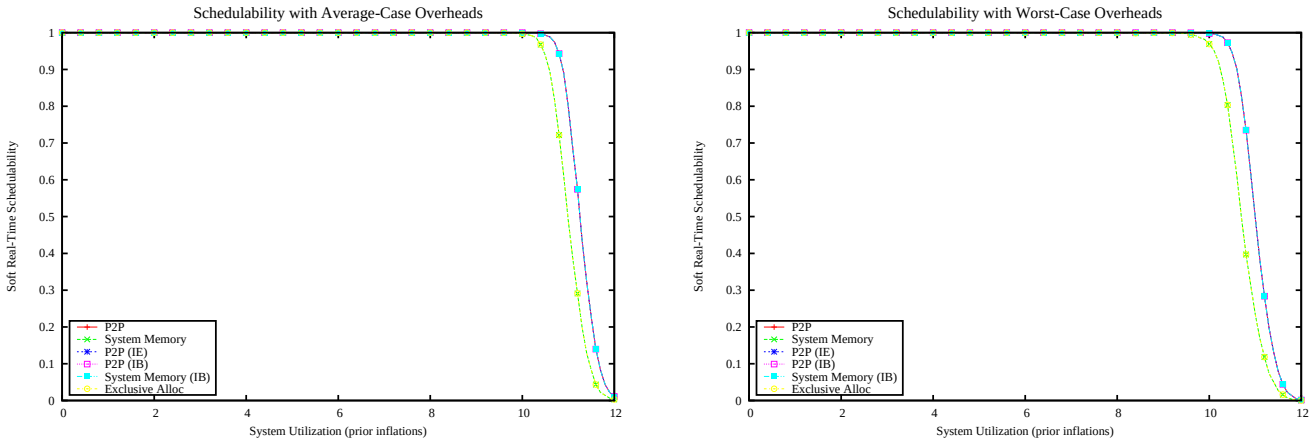

Figure 3446: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

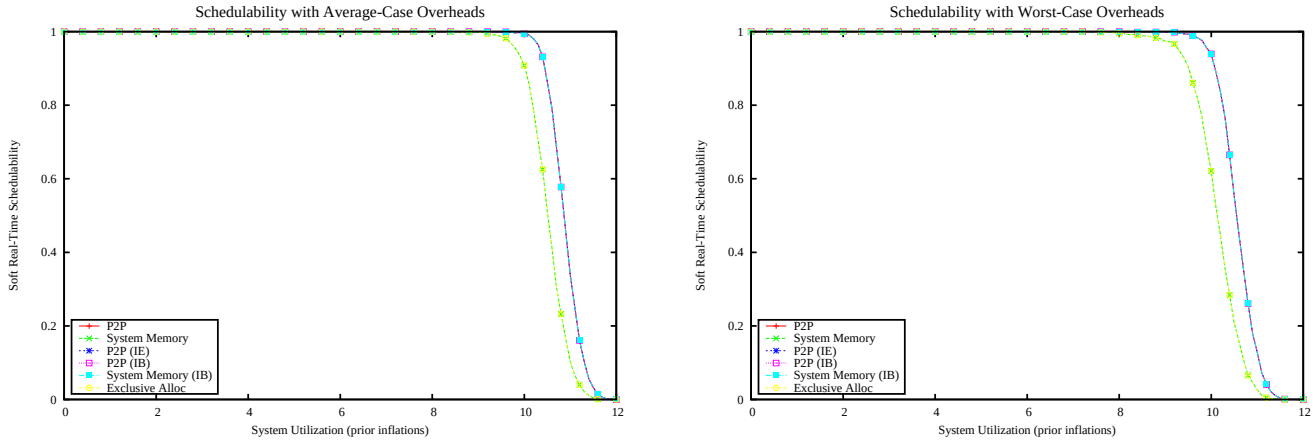

Figure 3447: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

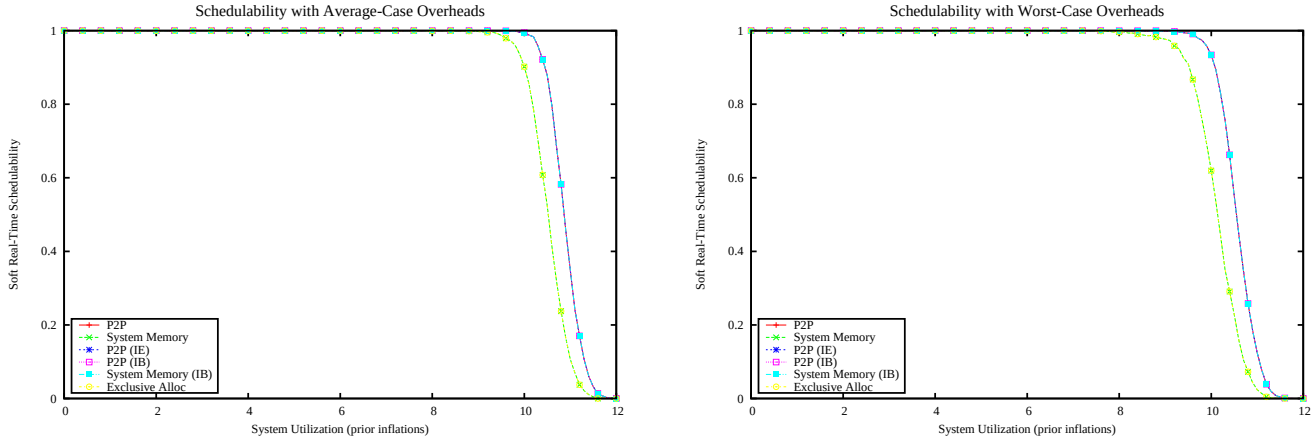

Figure 3448: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

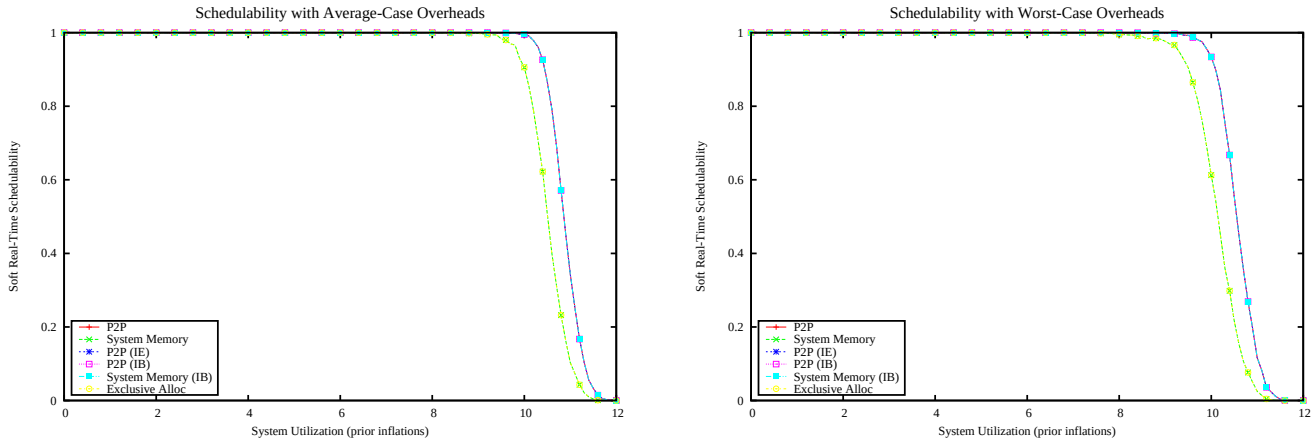

Figure 3449: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

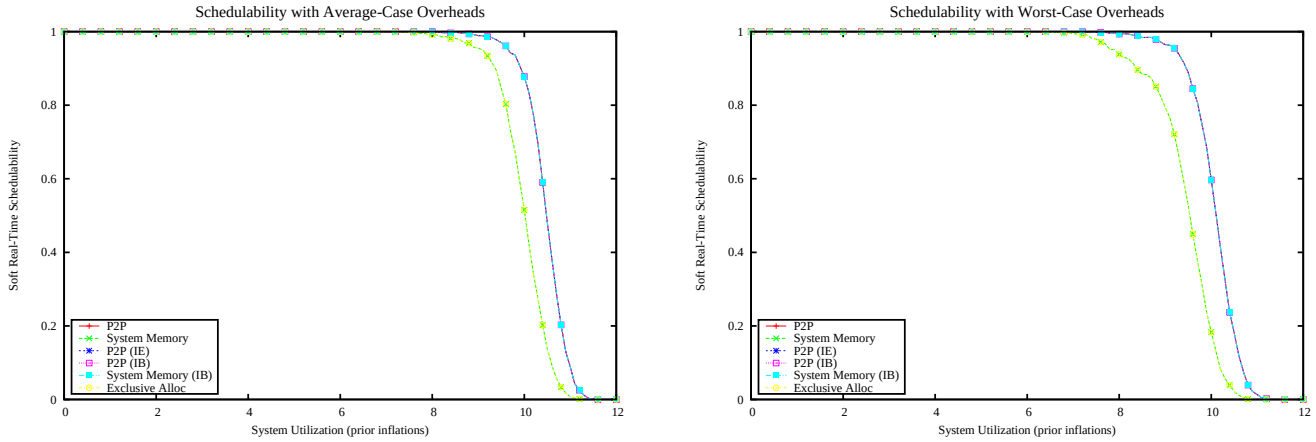

Figure 3450: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

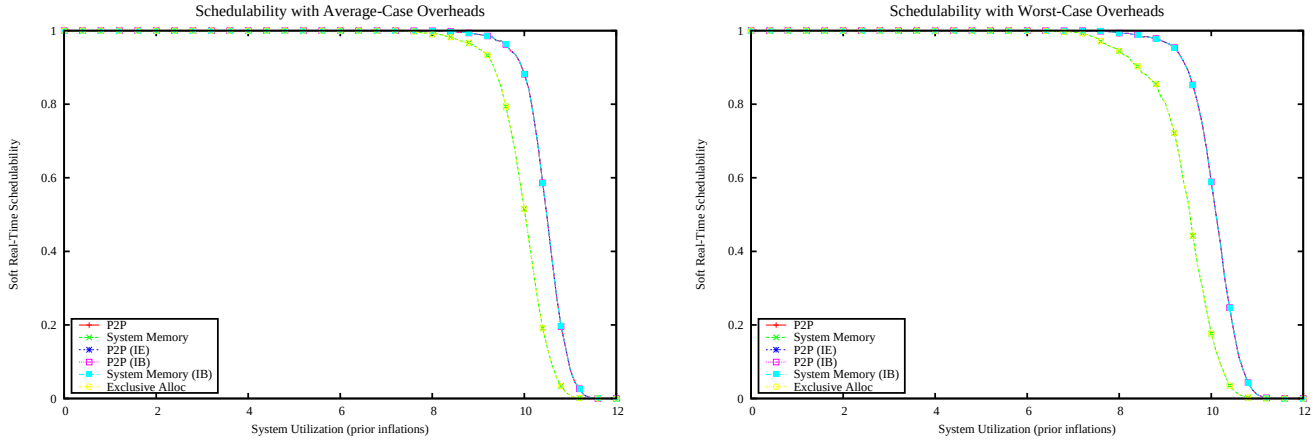

Figure 3451: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

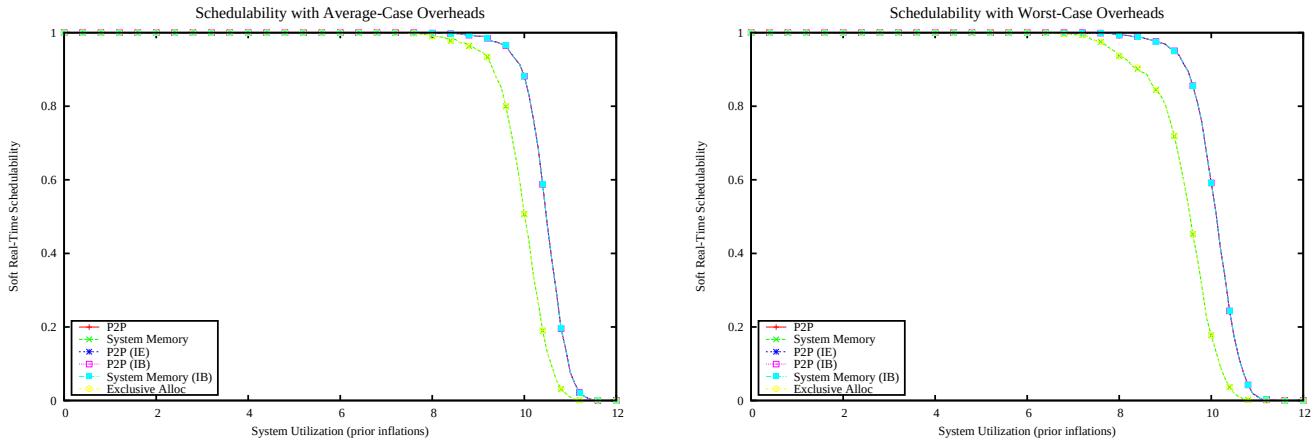

Figure 3452: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

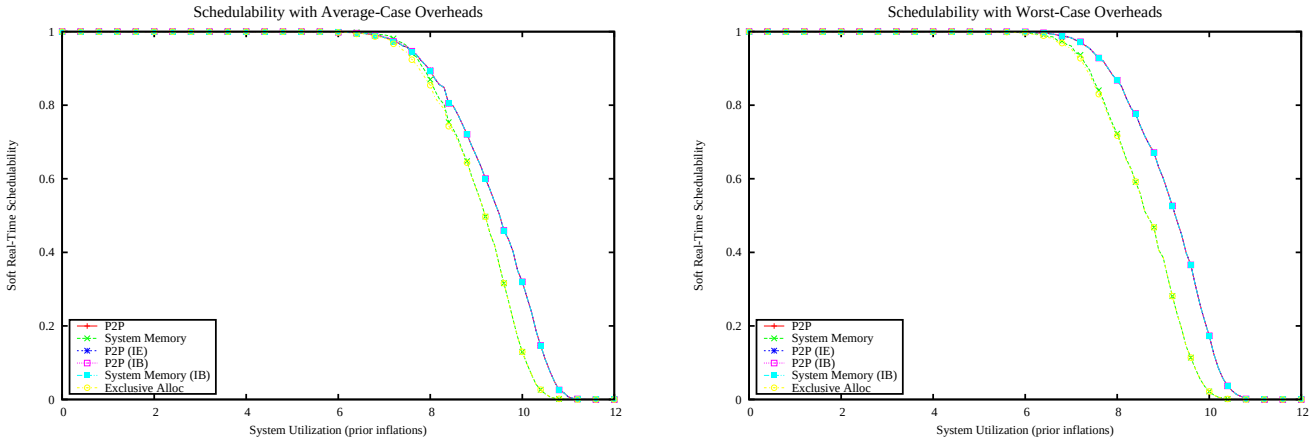

Figure 3453: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

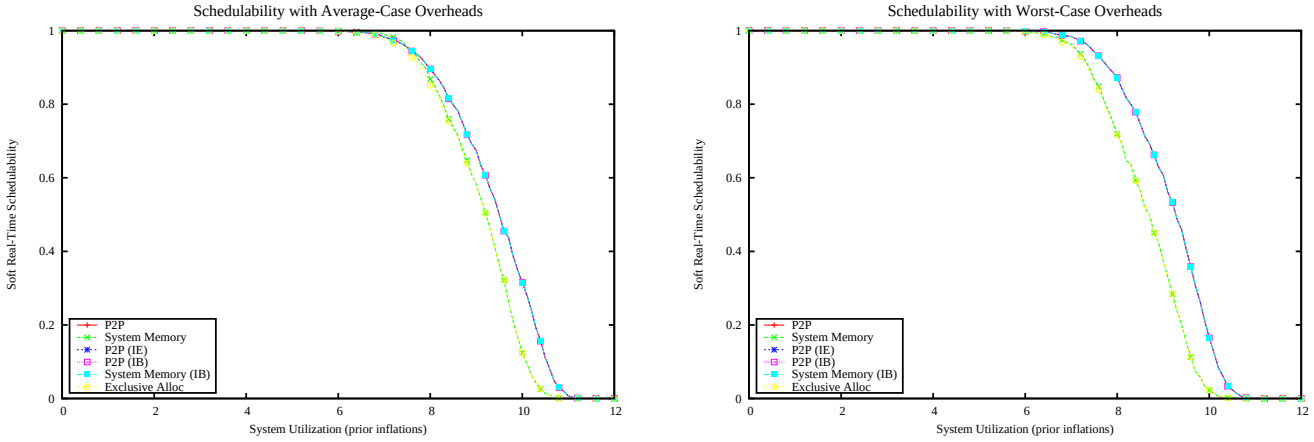

Figure 3454: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

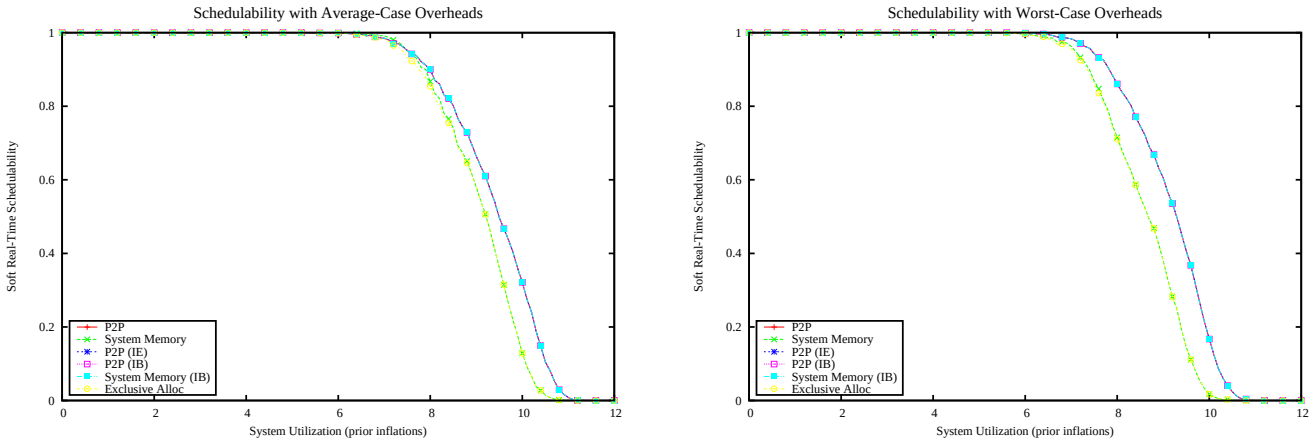

Figure 3455: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

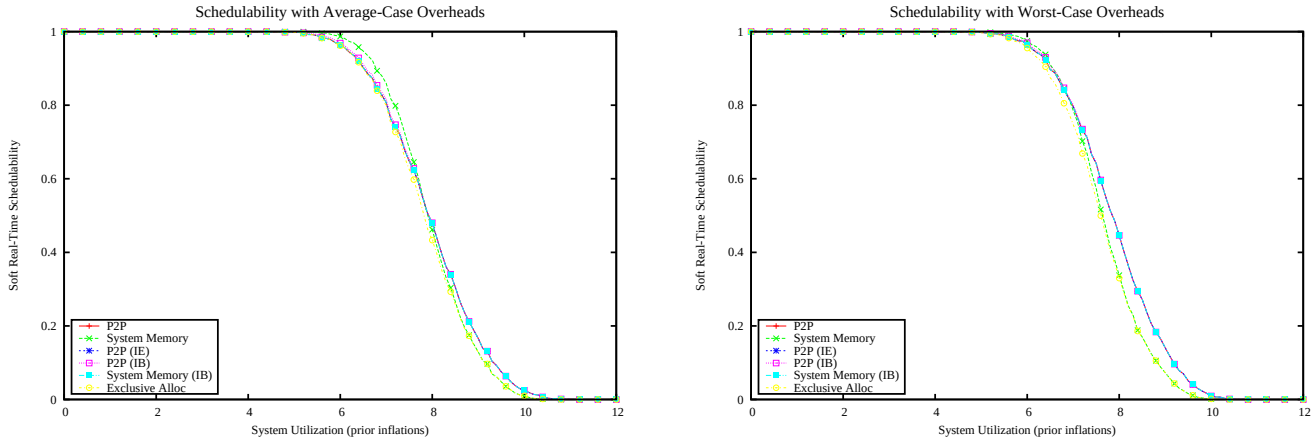

Figure 3456: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

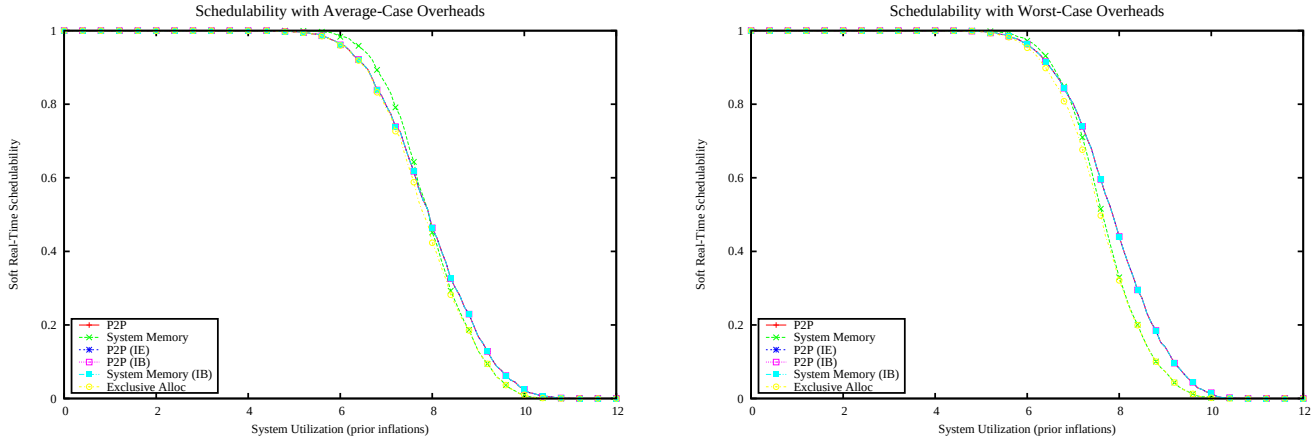

Figure 3457: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

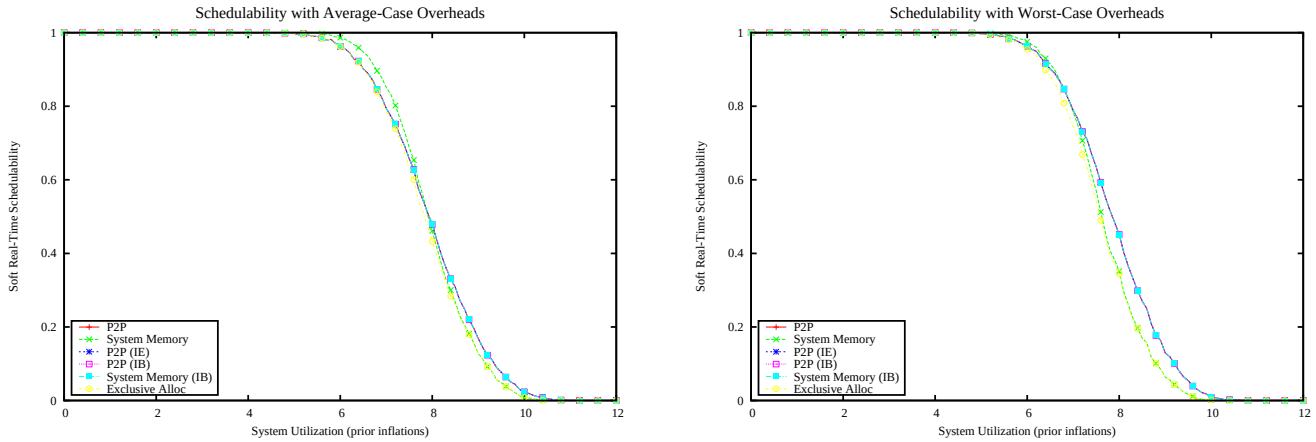

Figure 3458: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

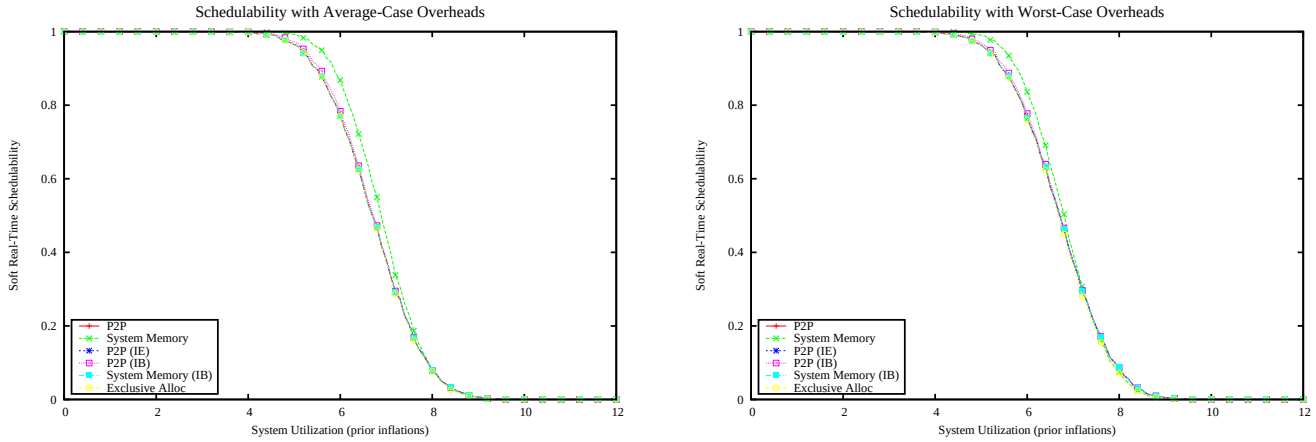

Figure 3459: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

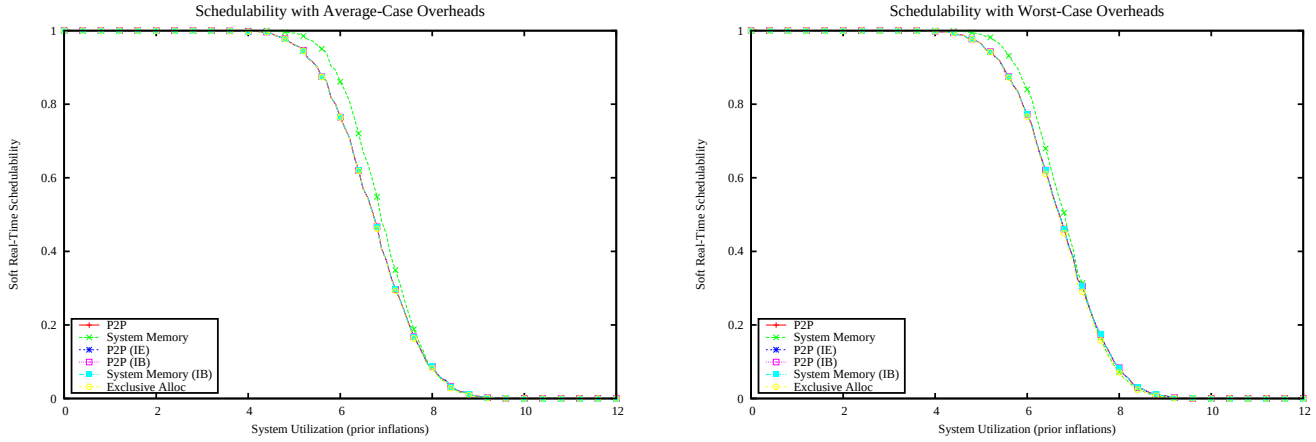

Figure 3460: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

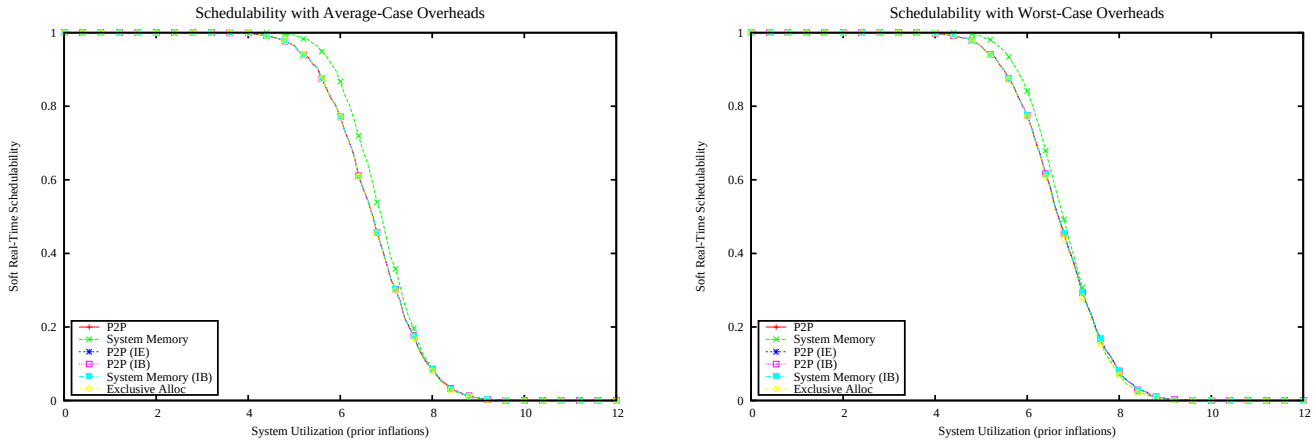

Figure 3461: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

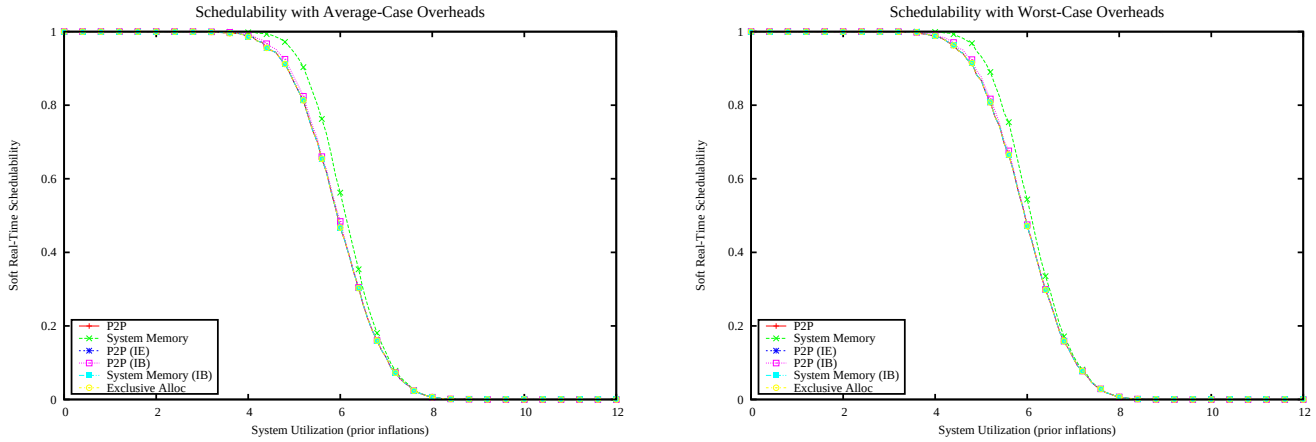

Figure 3462: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

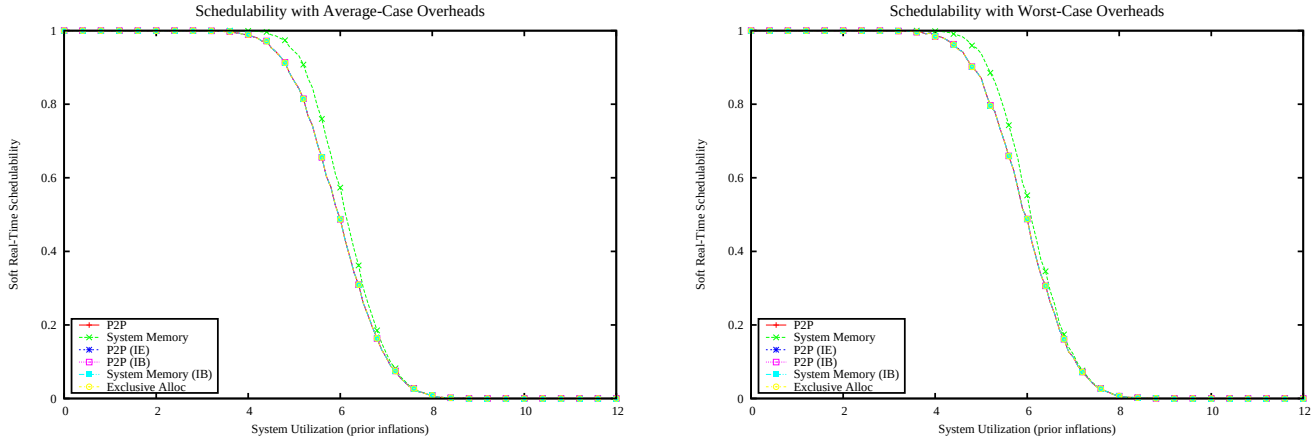

Figure 3463: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

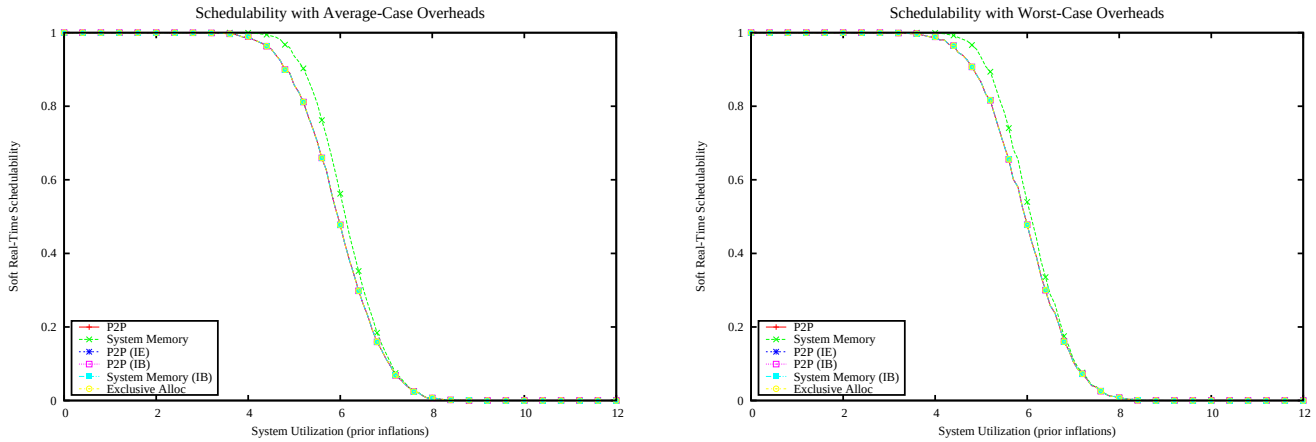

Figure 3464: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

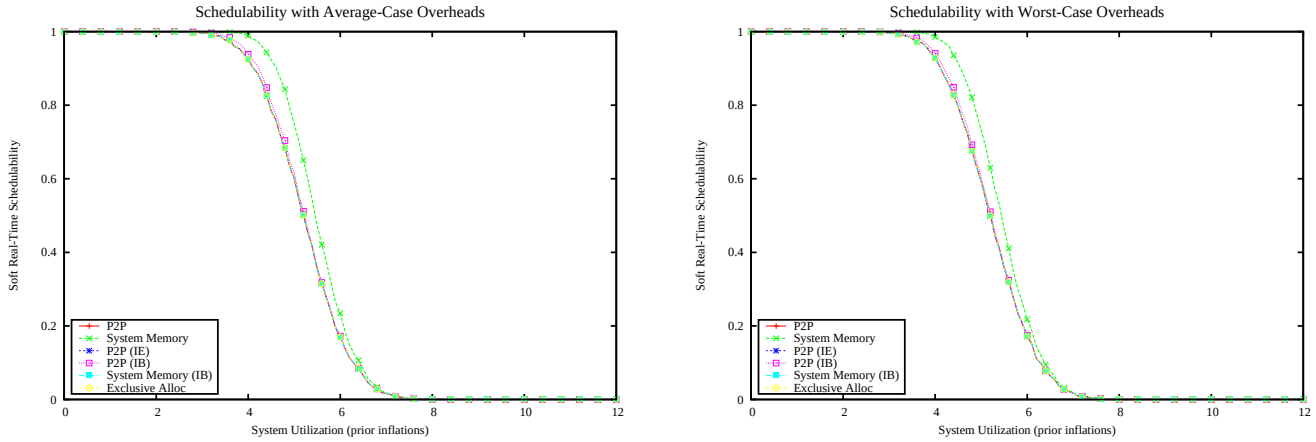

Figure 3465: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

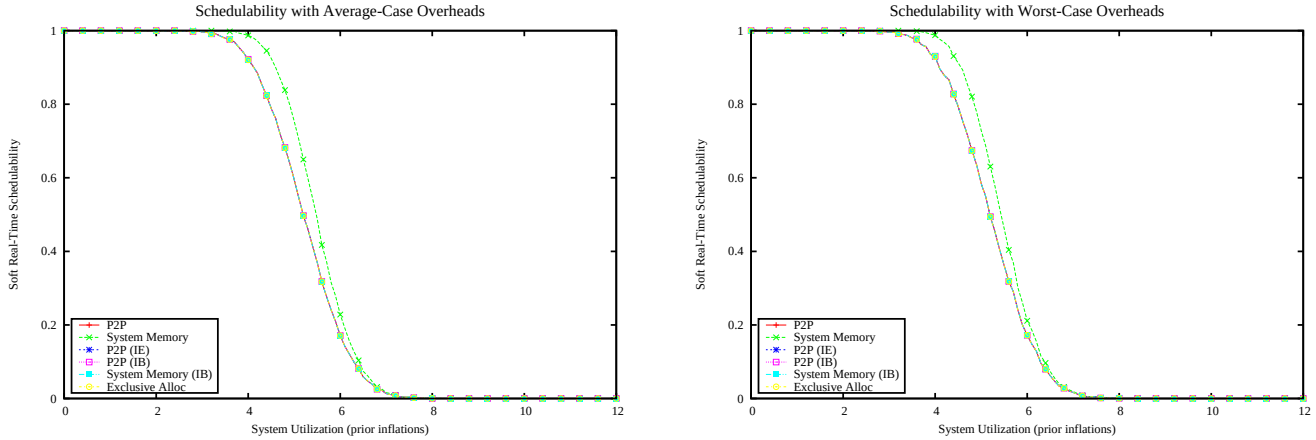

Figure 3466: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

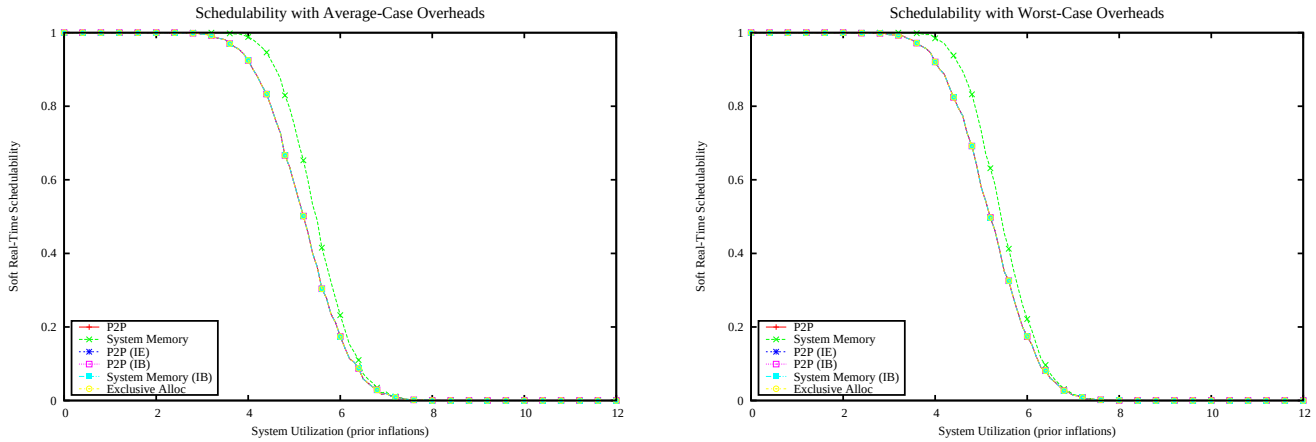

Figure 3467: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

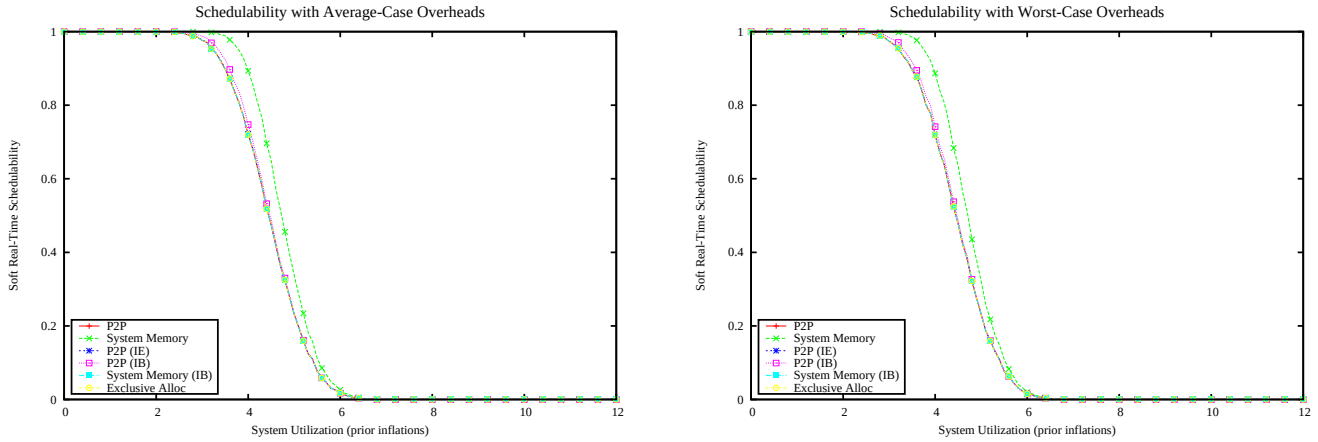

Figure 3468: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

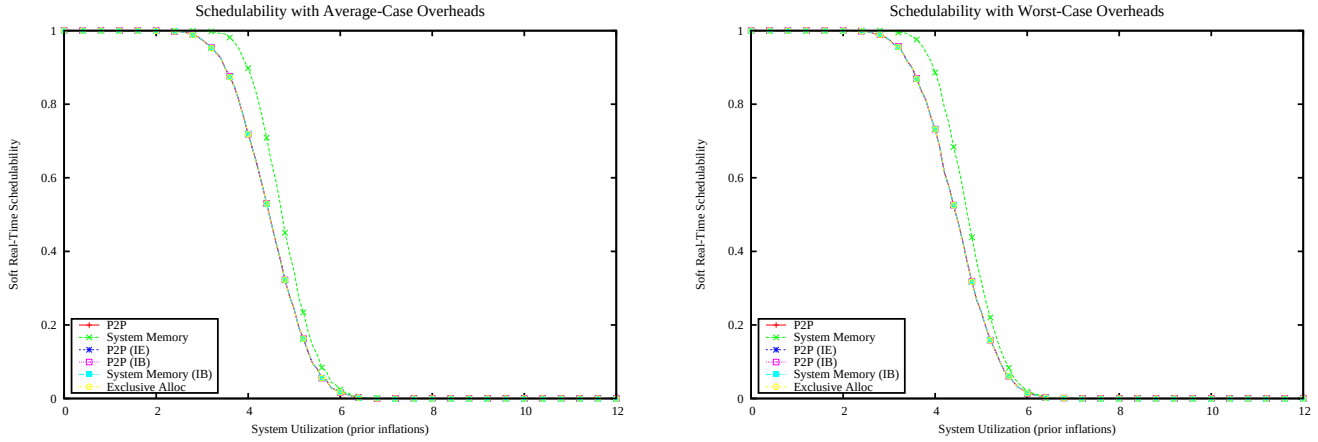

Figure 3469: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

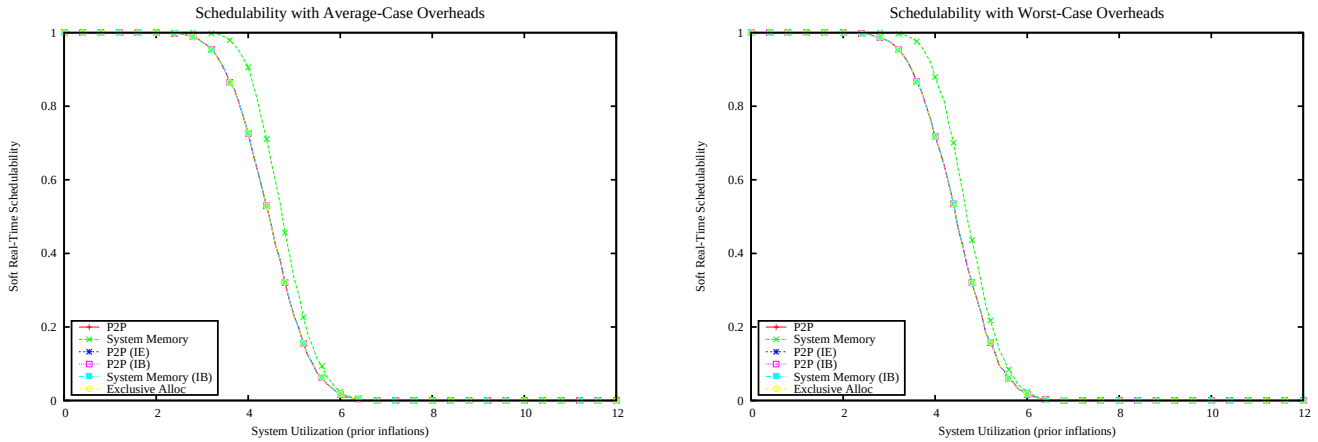

Figure 3470: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

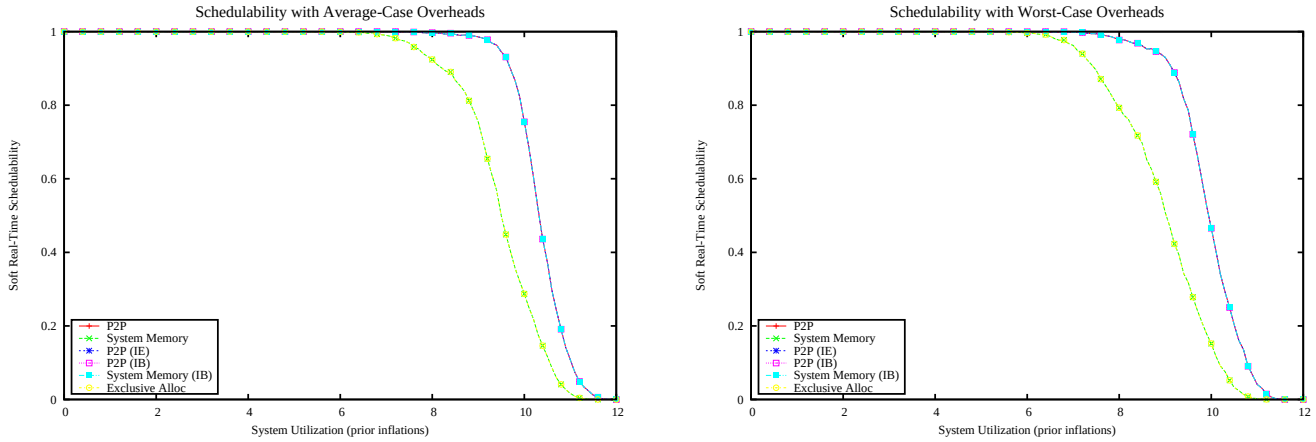

Figure 3471: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

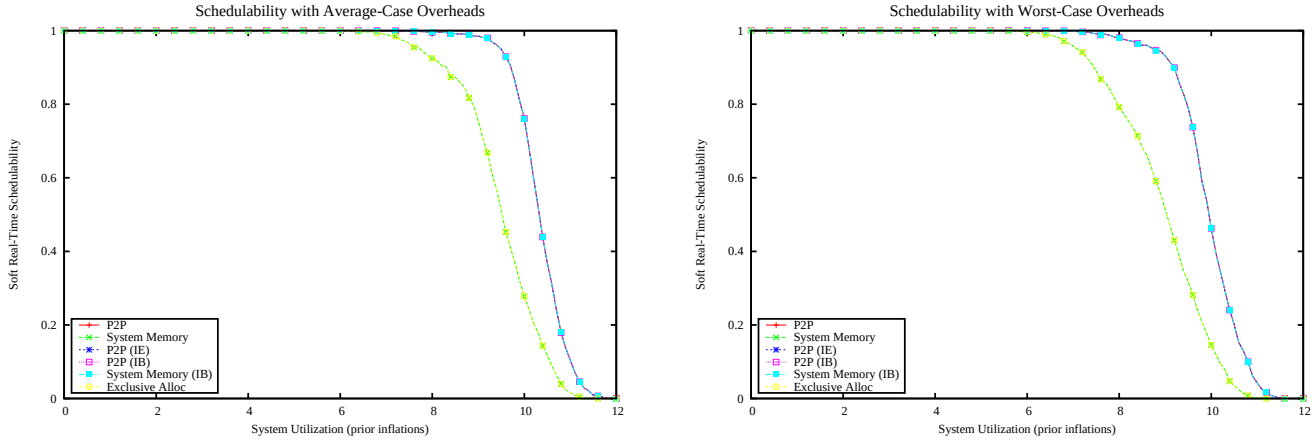

Figure 3472: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

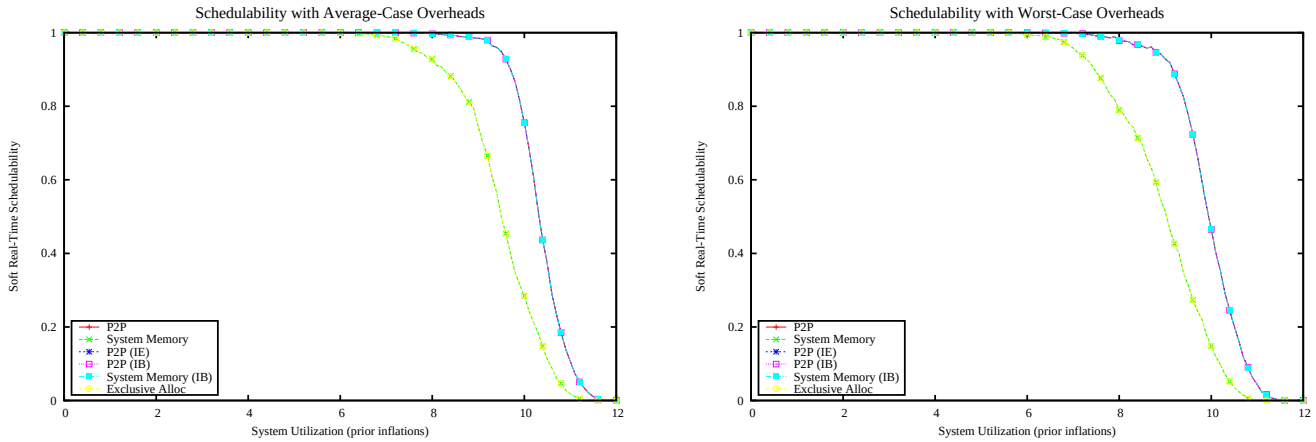

Figure 3473: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

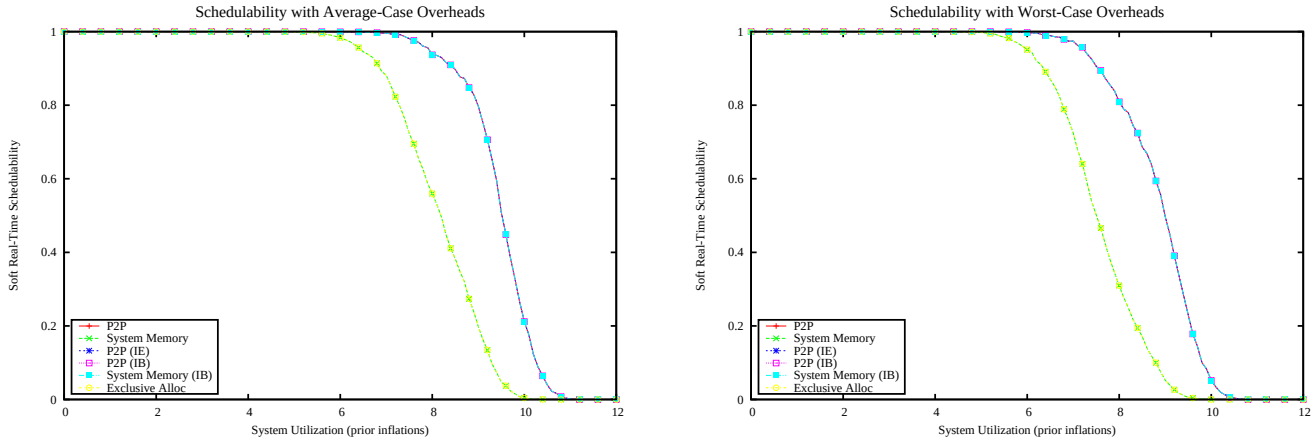

Figure 3474: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

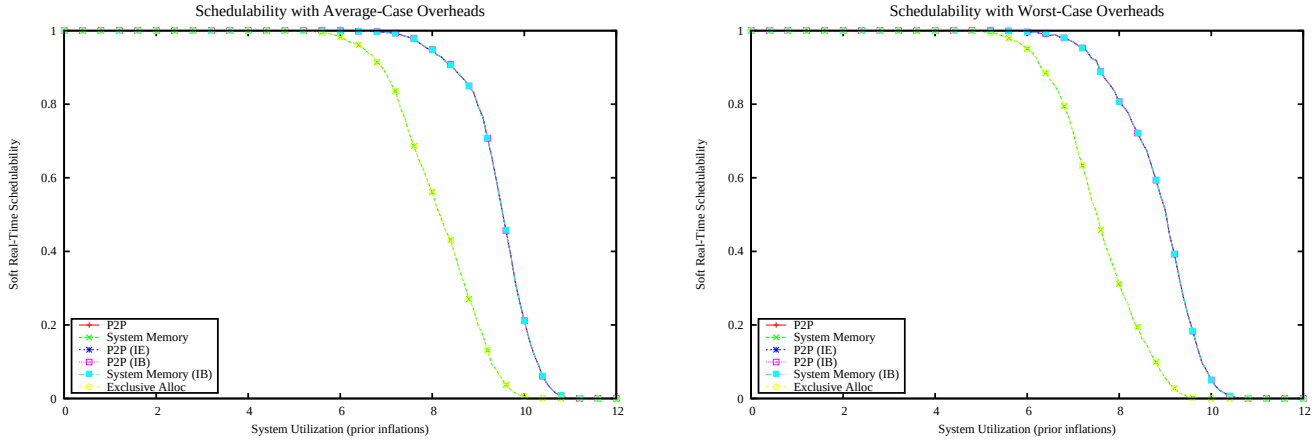

Figure 3475: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

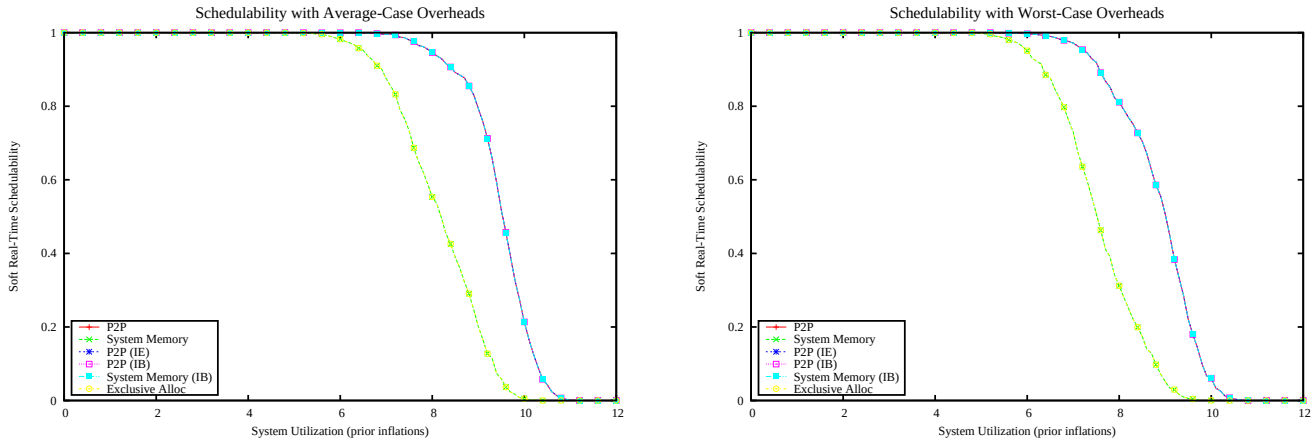

Figure 3476: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

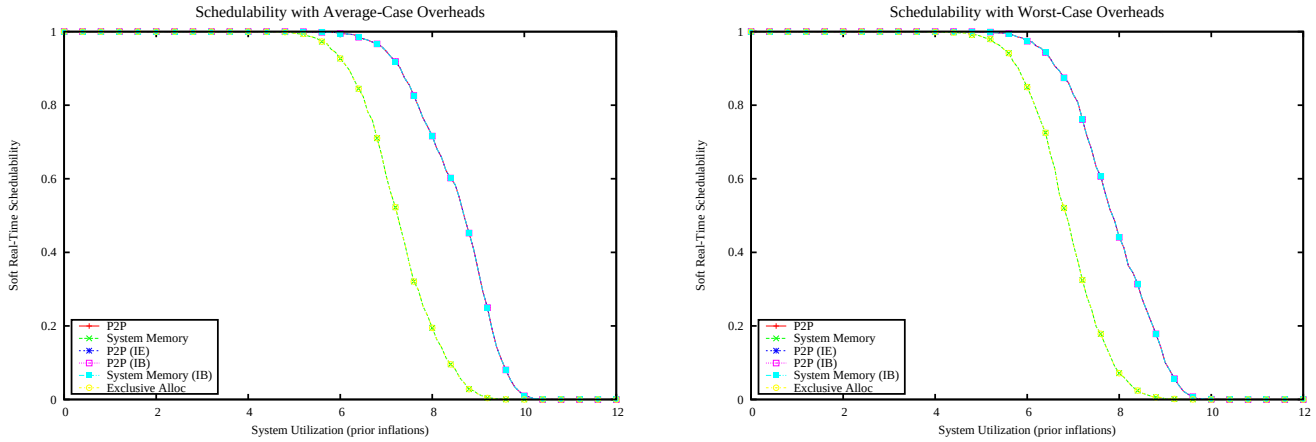

Figure 3477: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

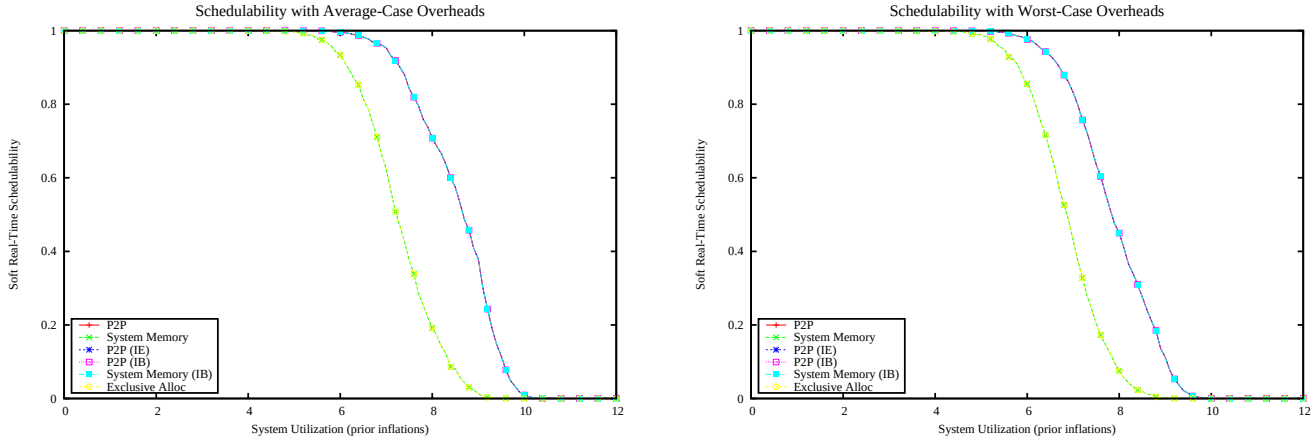

Figure 3478: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

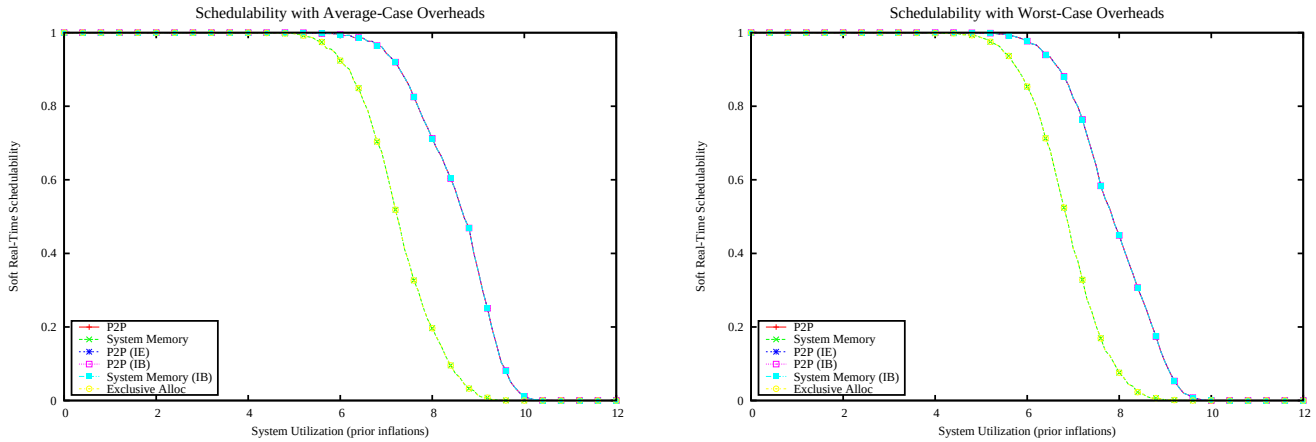

Figure 3479: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

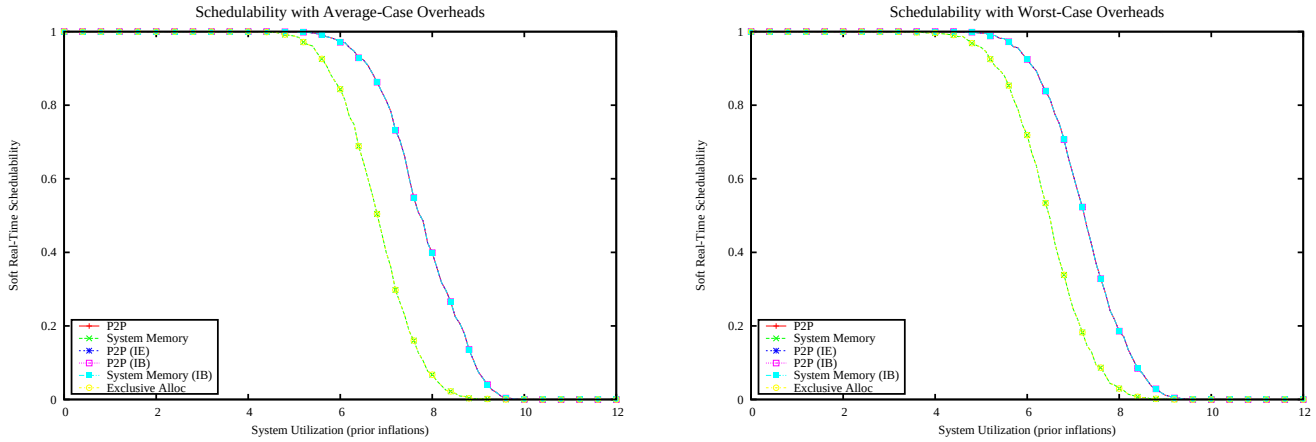

Figure 3480: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

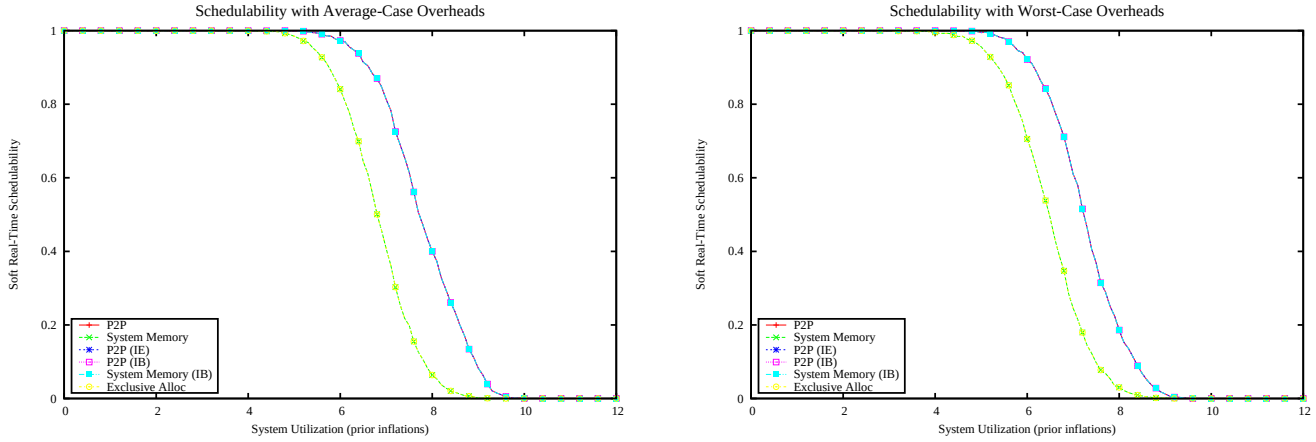

Figure 3481: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

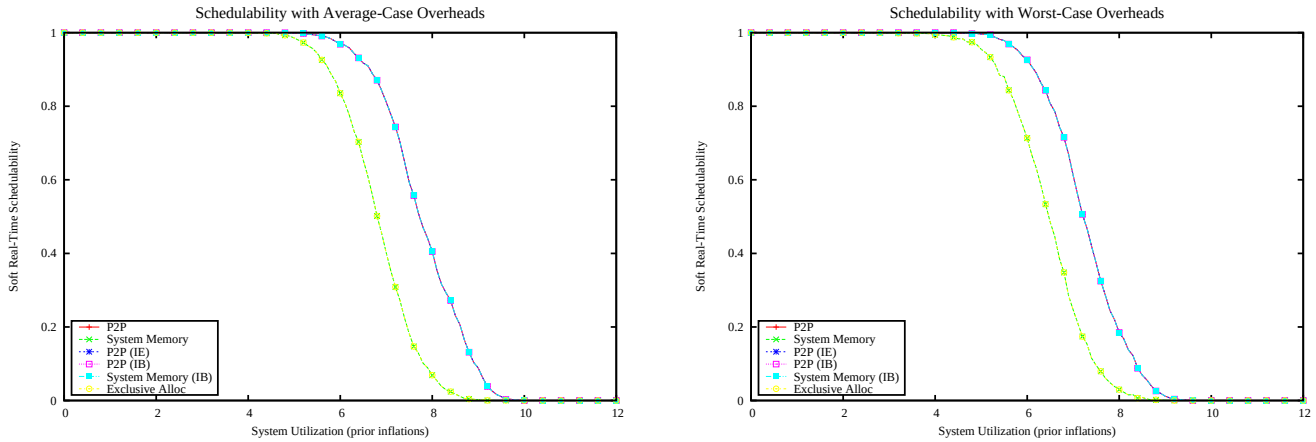

Figure 3482: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

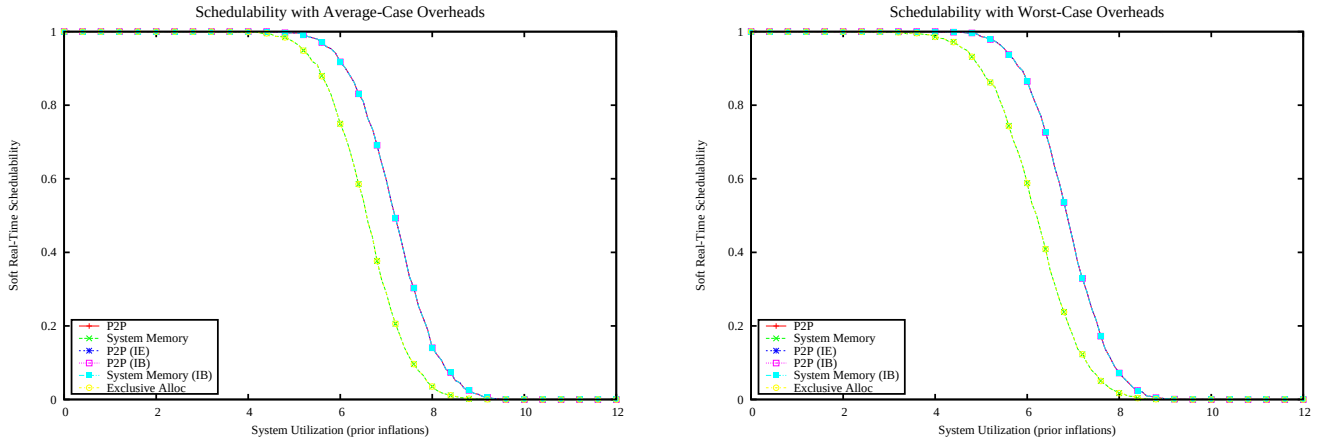

Figure 3483: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

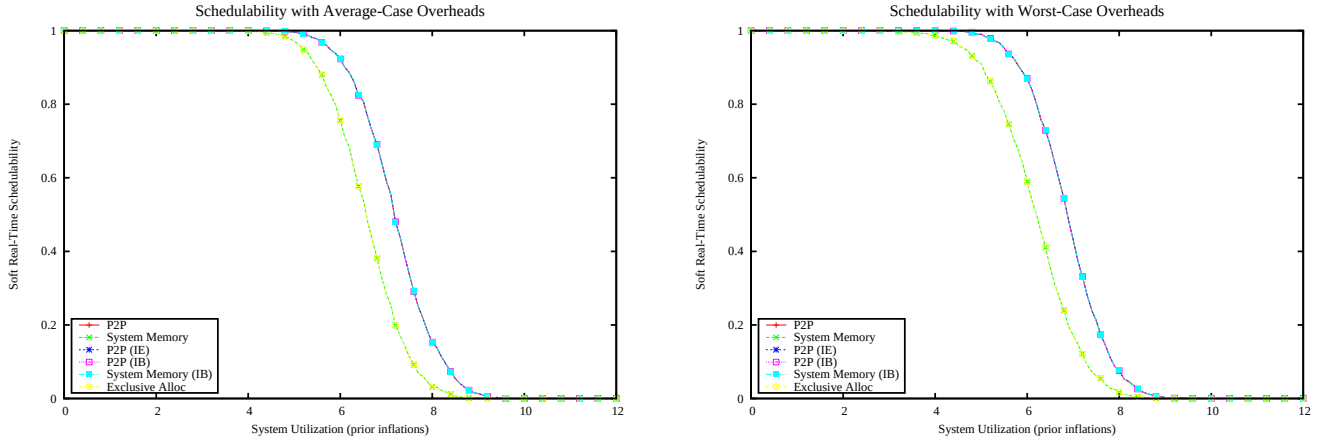

Figure 3484: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

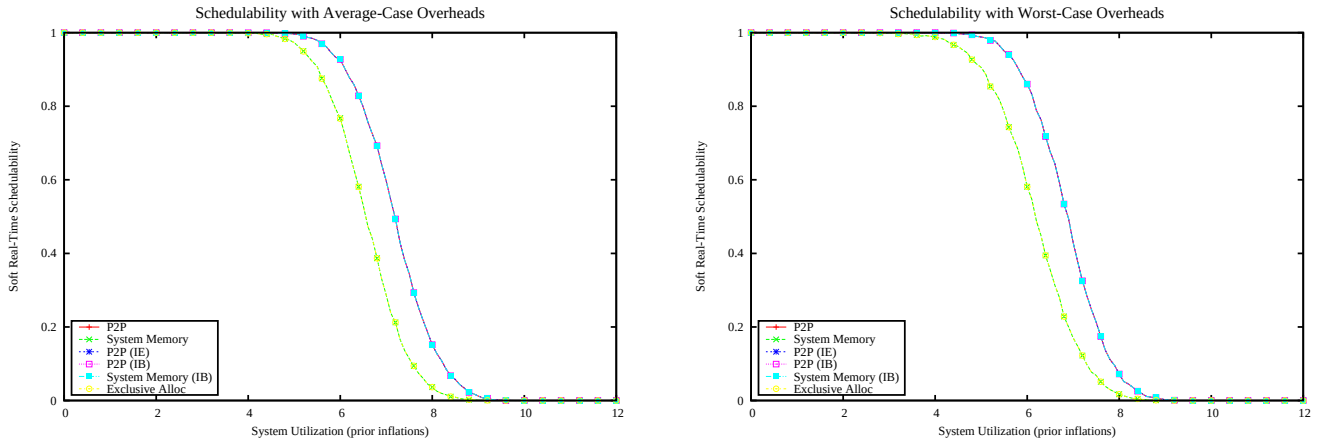

Figure 3485: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

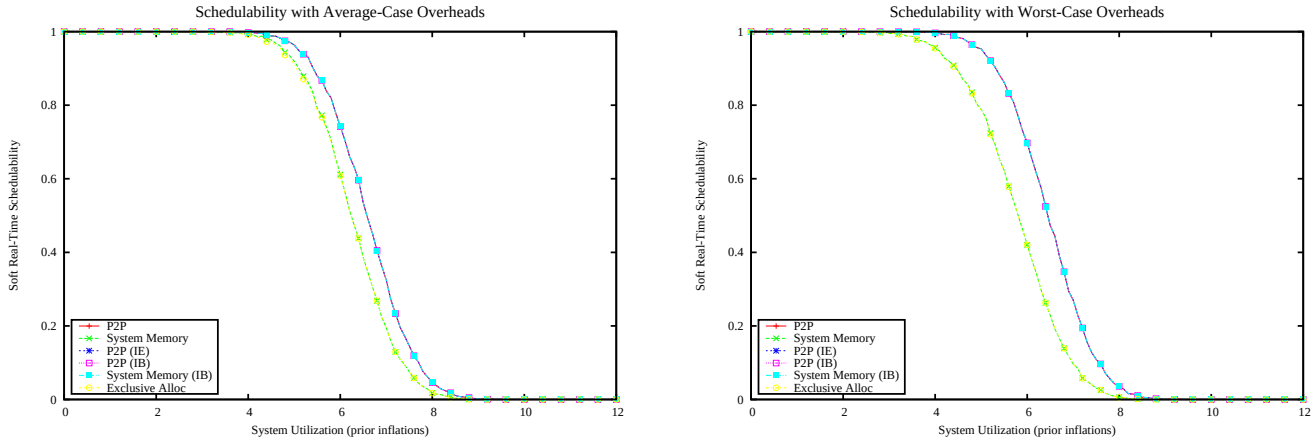

Figure 3486: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

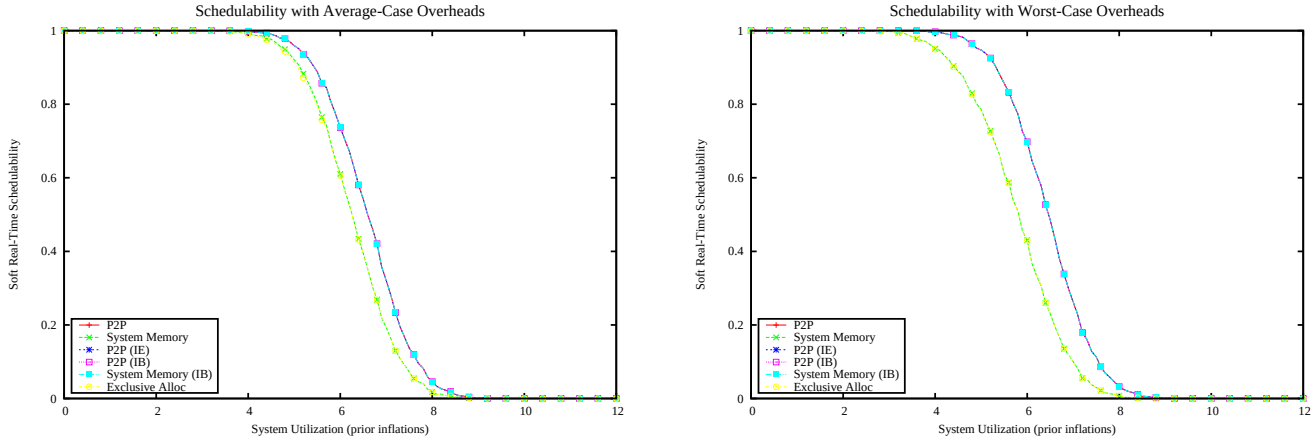

Figure 3487: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

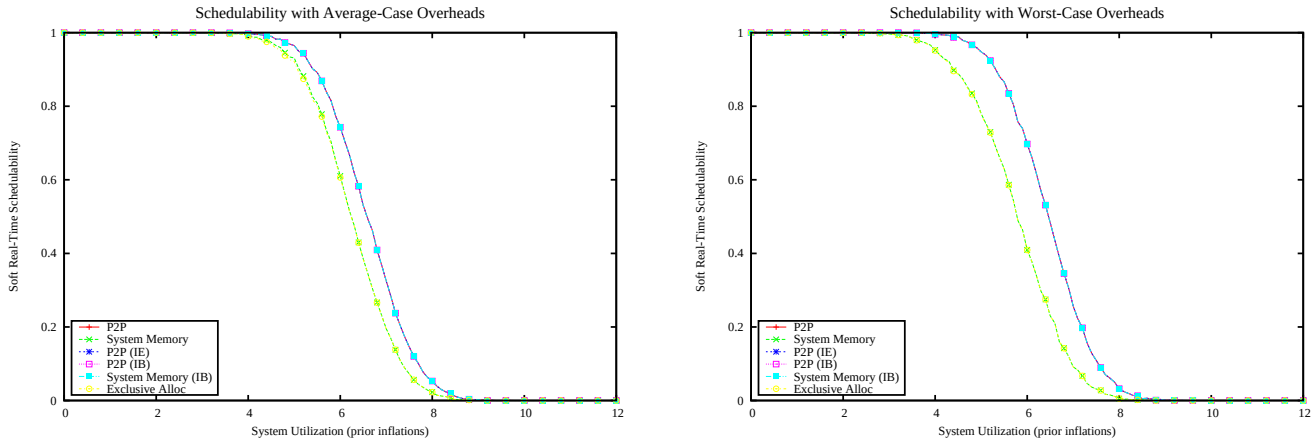

Figure 3488: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

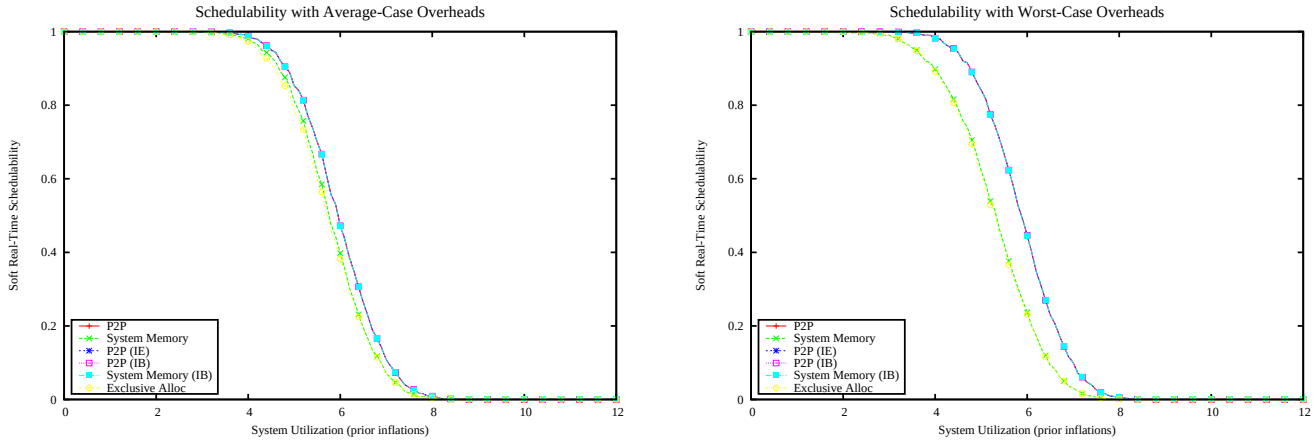

Figure 3489: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

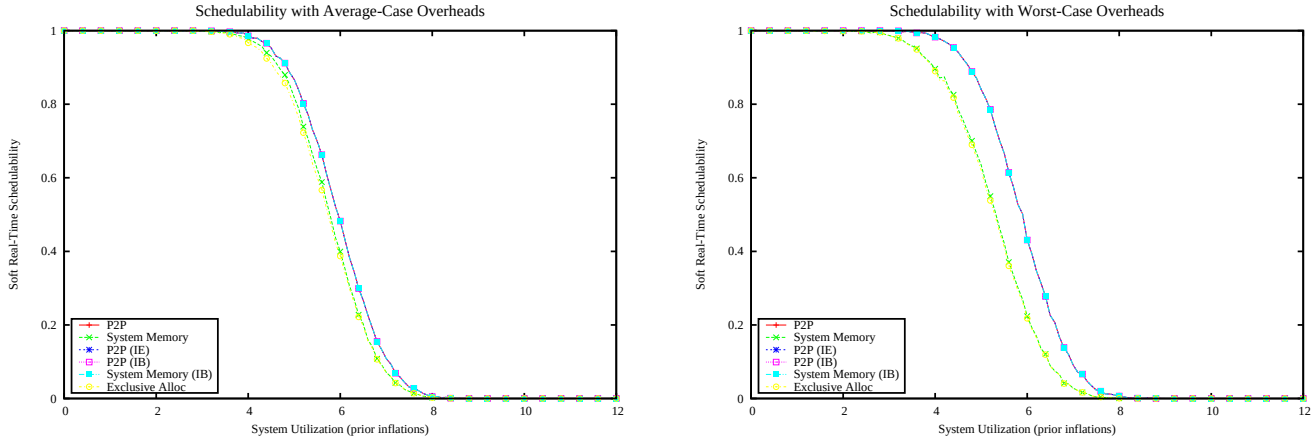

Figure 3490: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

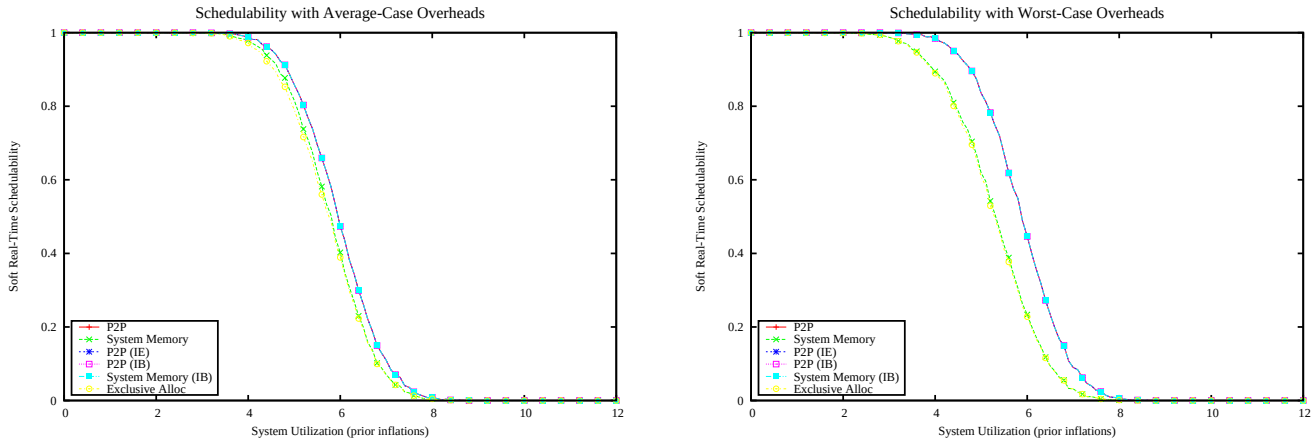

Figure 3491: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

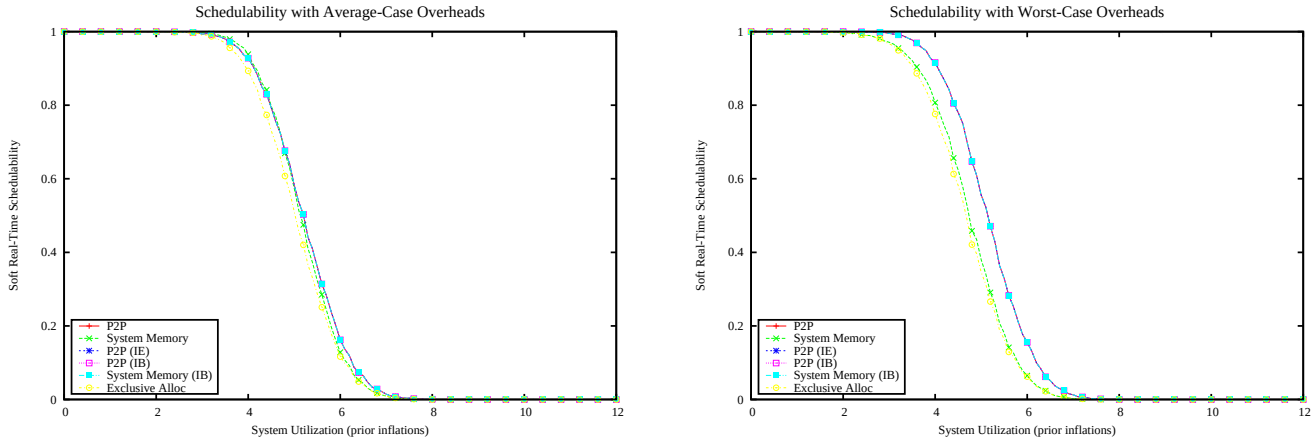

Figure 3492: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

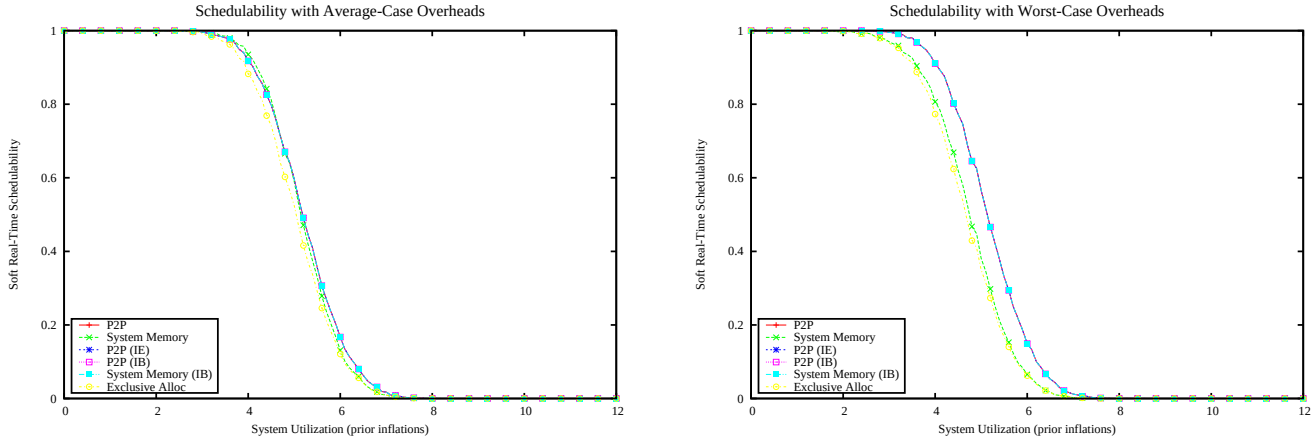

Figure 3493: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

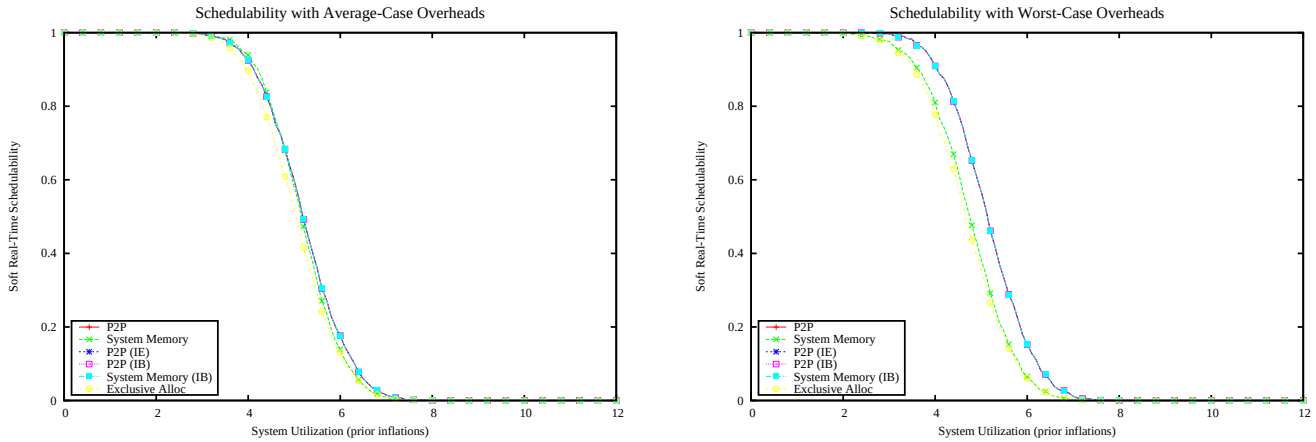

Figure 3494: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

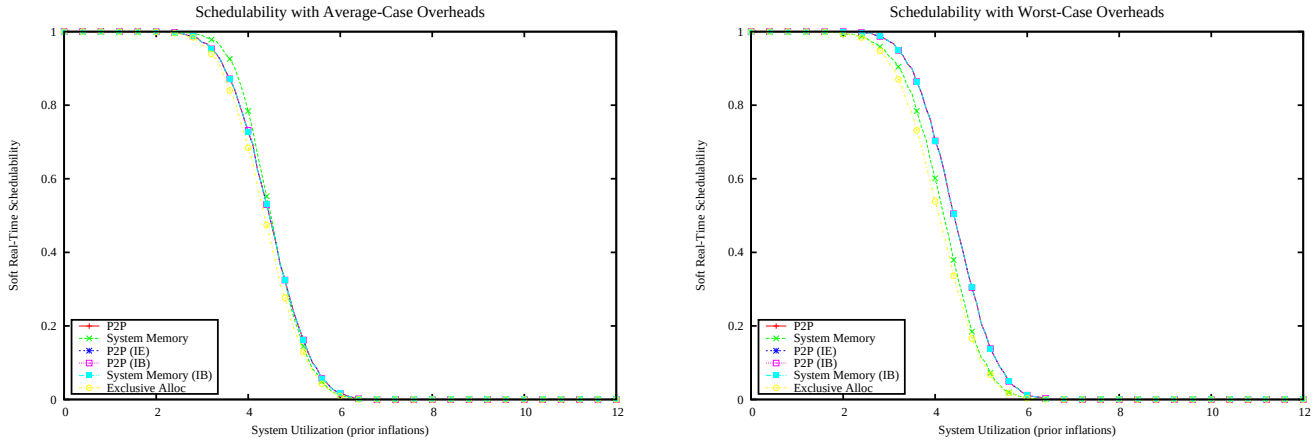

Figure 3495: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

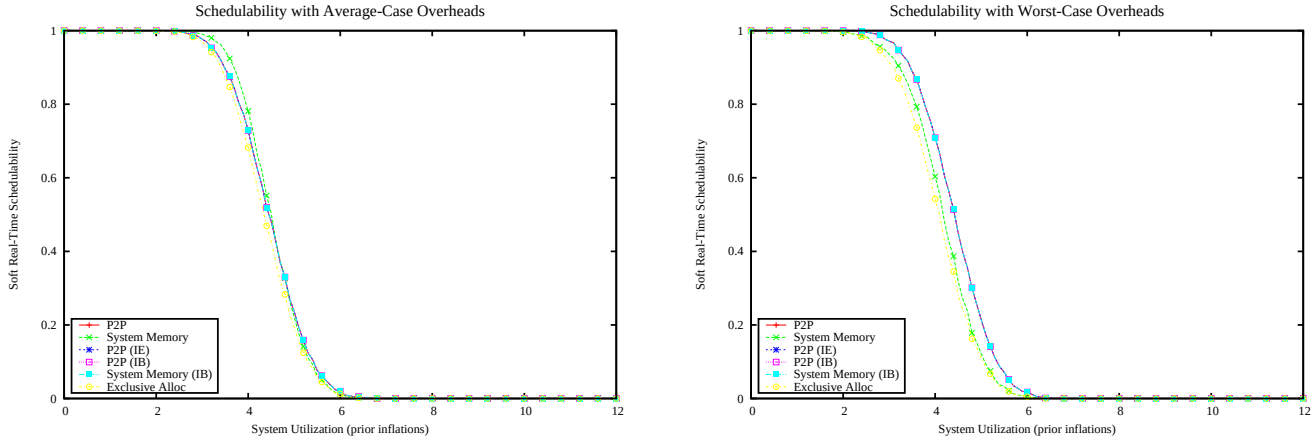

Figure 3496: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

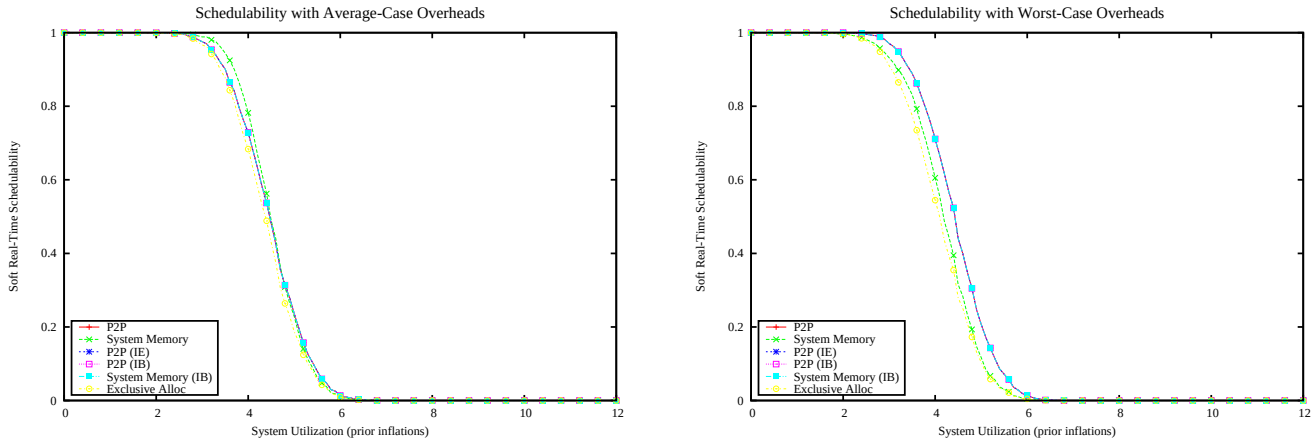

Figure 3497: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

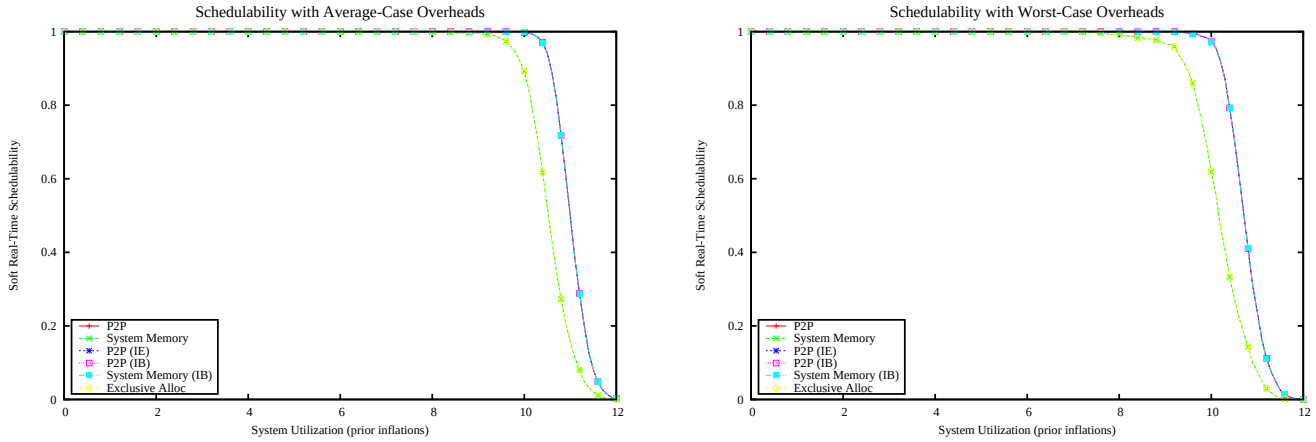

Figure 3498: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

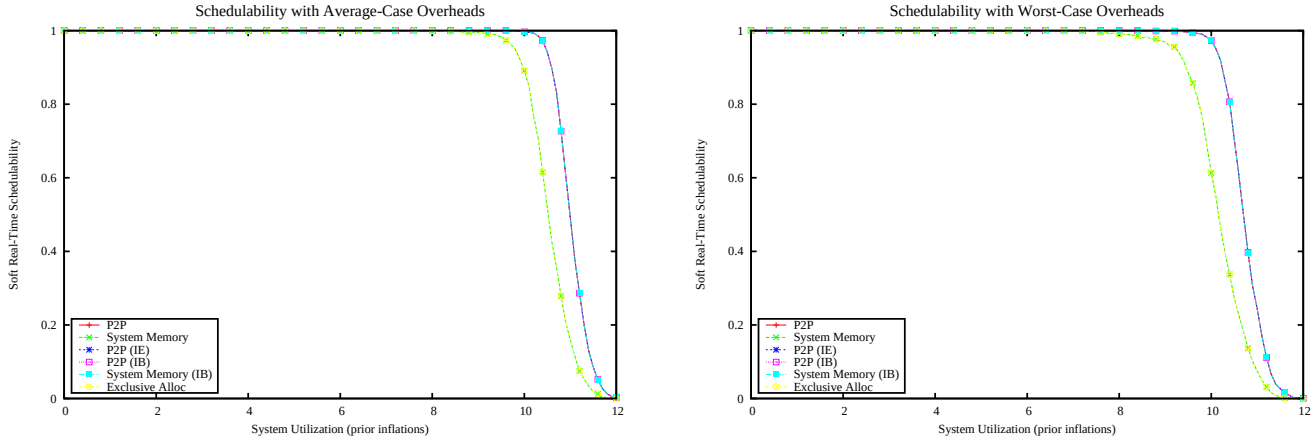

Figure 3499: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

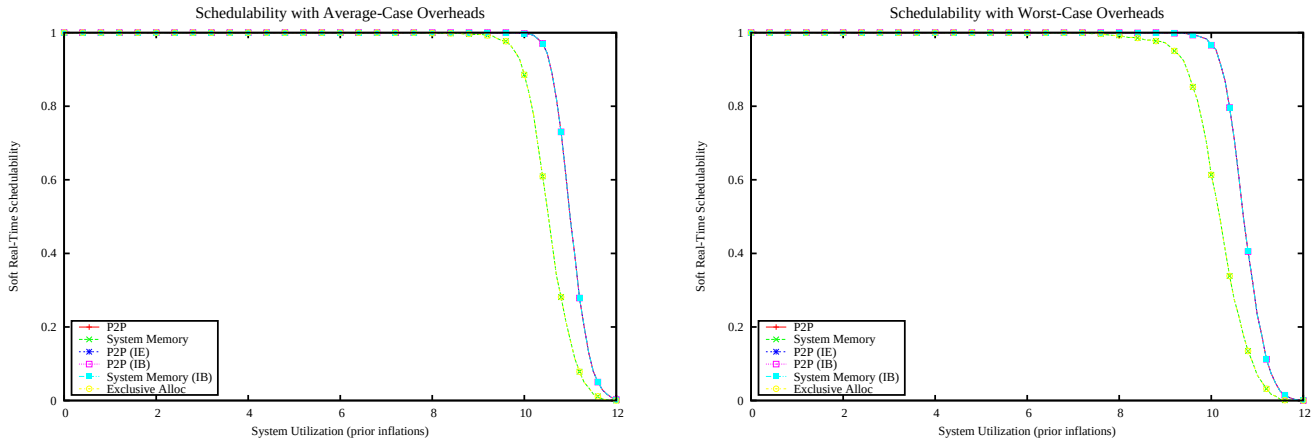

Figure 3500: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

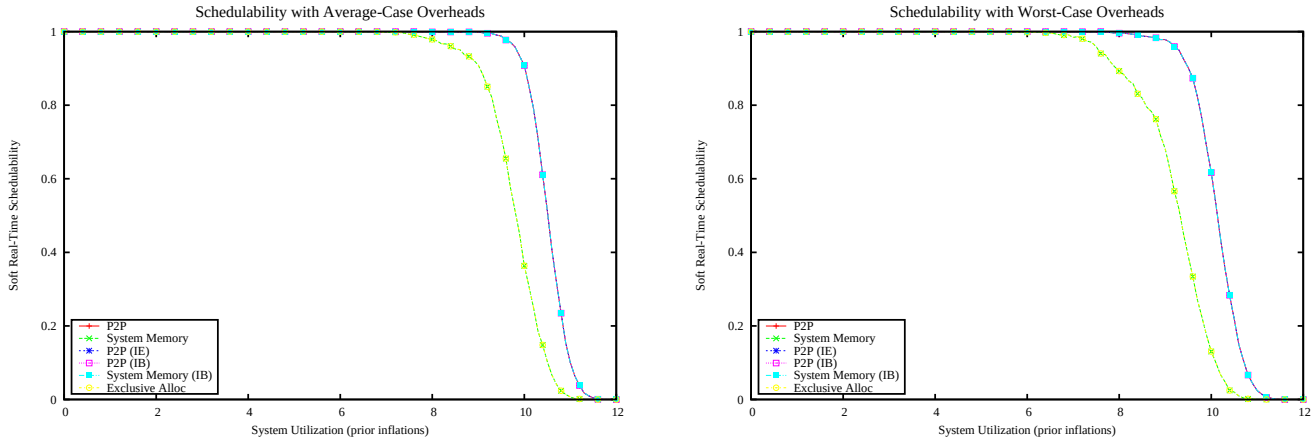

Figure 3501: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

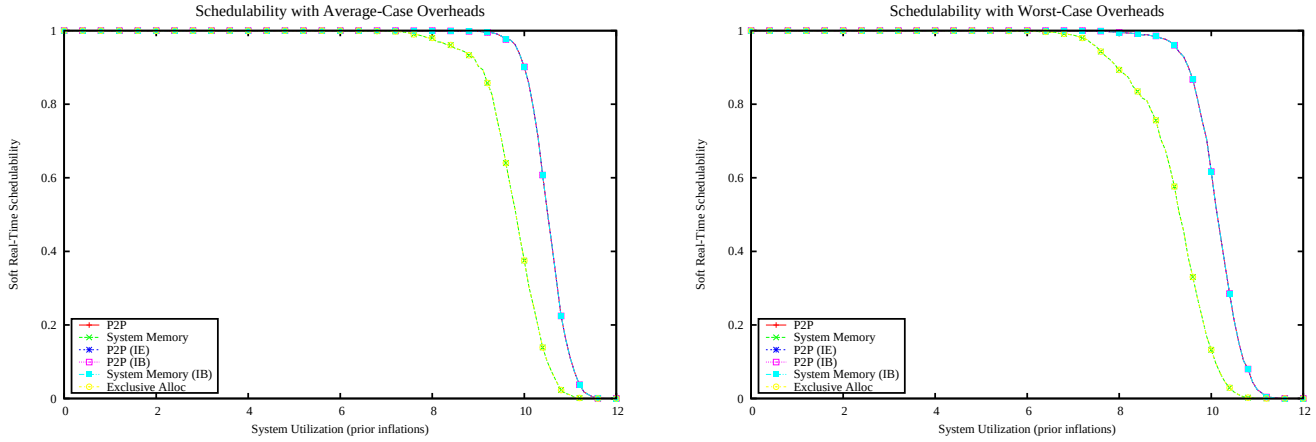

Figure 3502: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

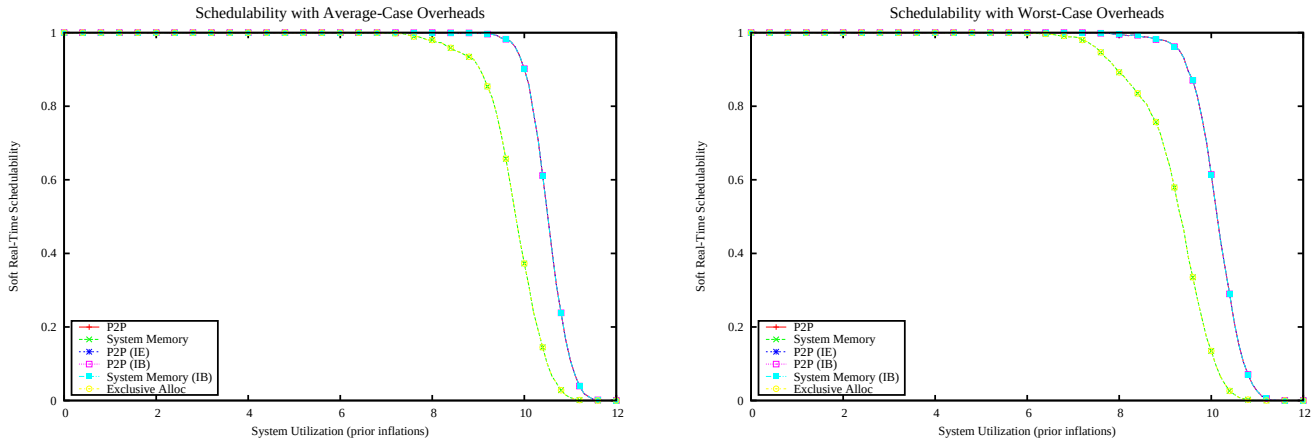

Figure 3503: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

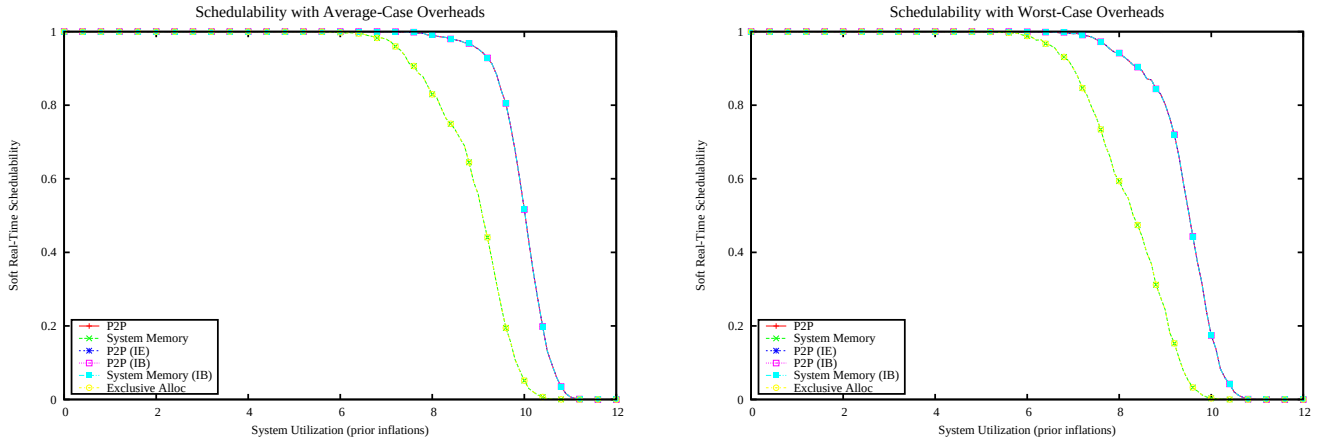

Figure 3504: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

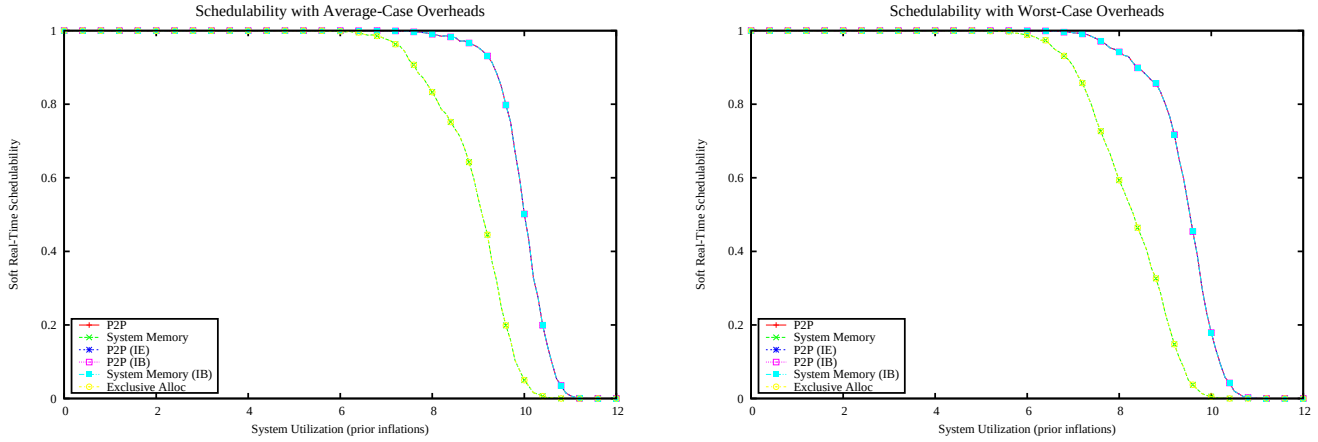

Figure 3505: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

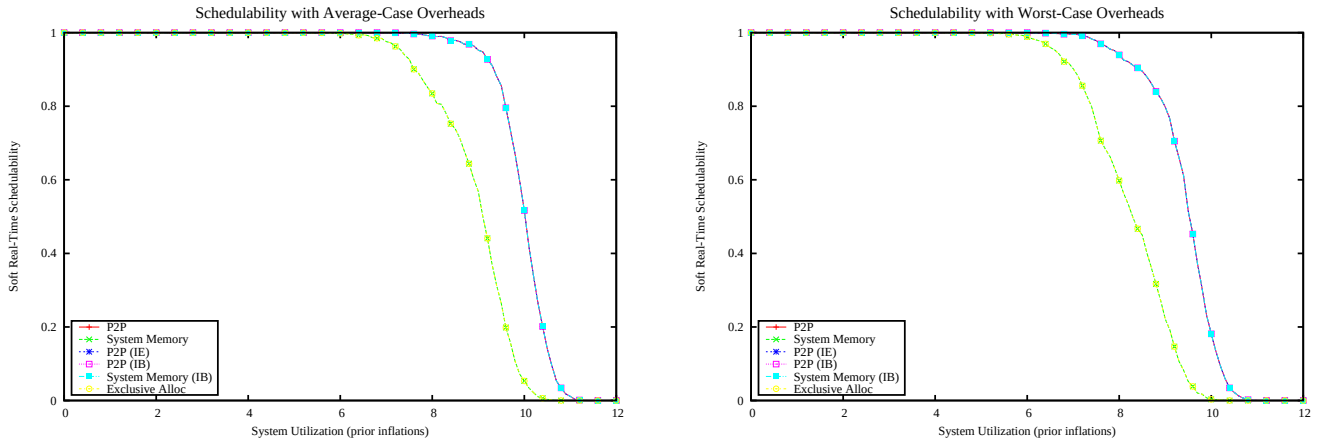

Figure 3506: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

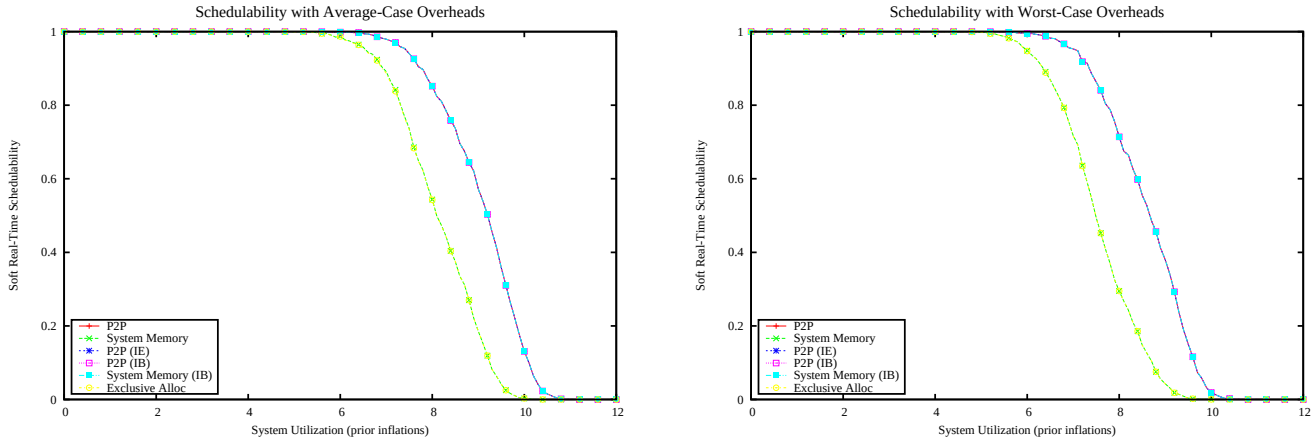

Figure 3507: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

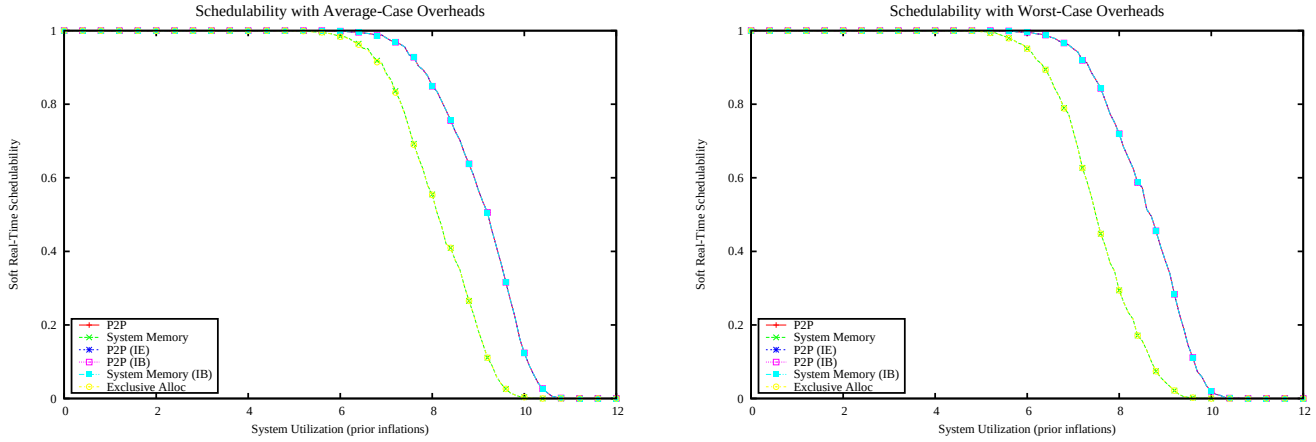

Figure 3508: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

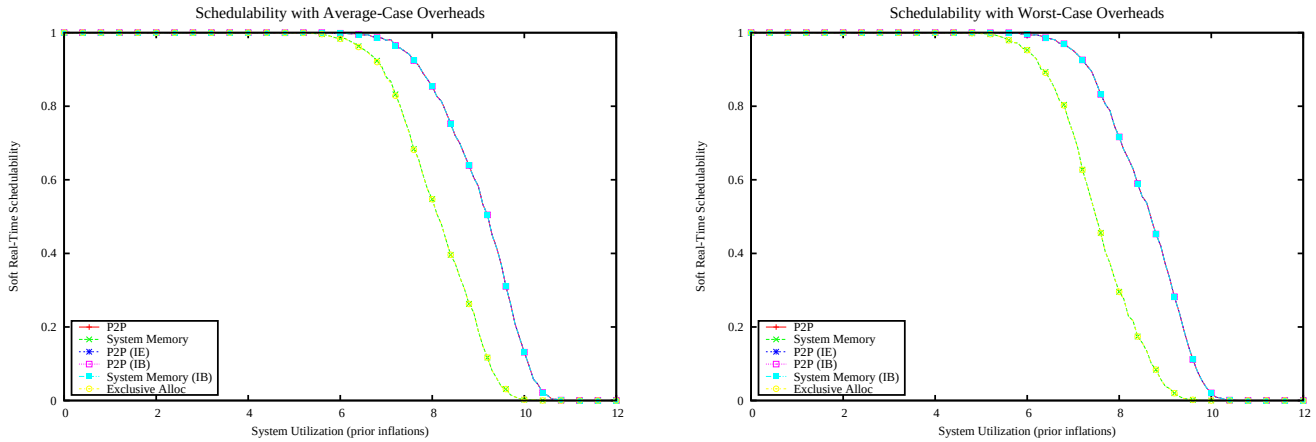

Figure 3509: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

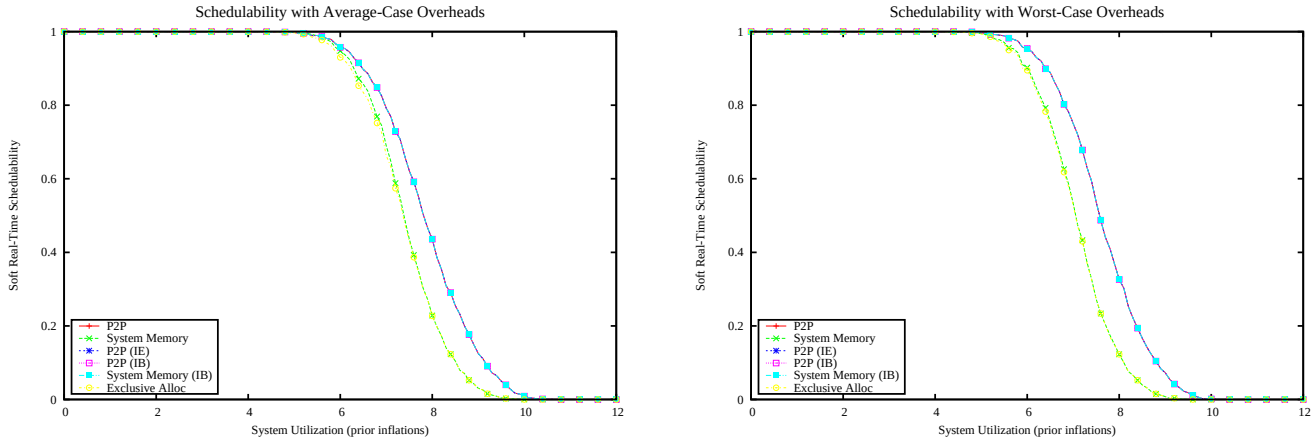

Figure 3510: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

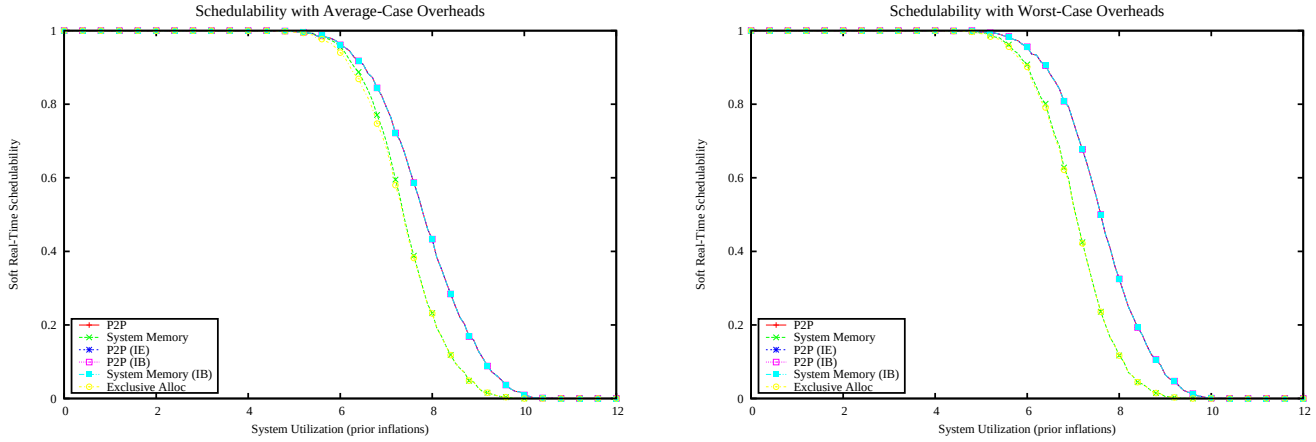

Figure 3511: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

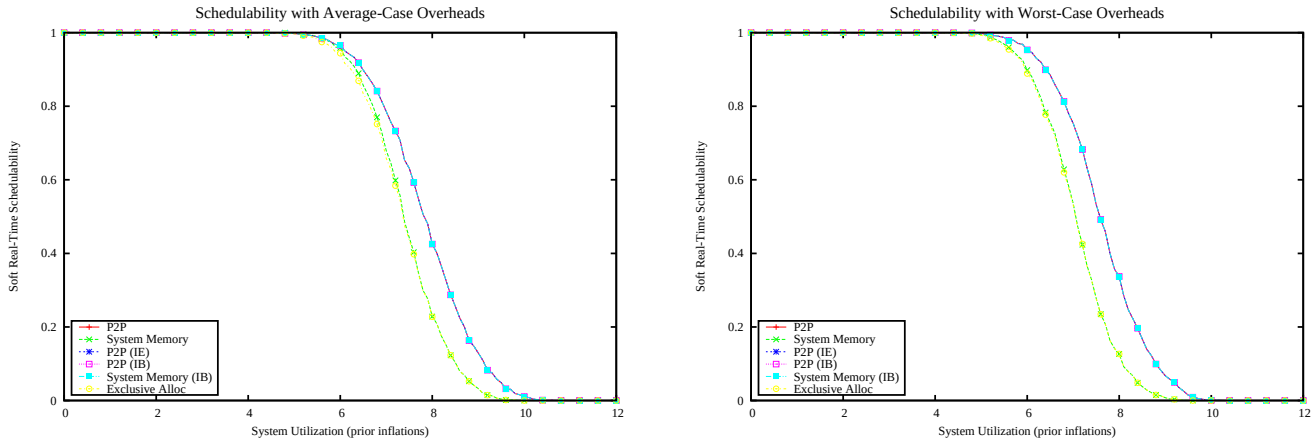

Figure 3512: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

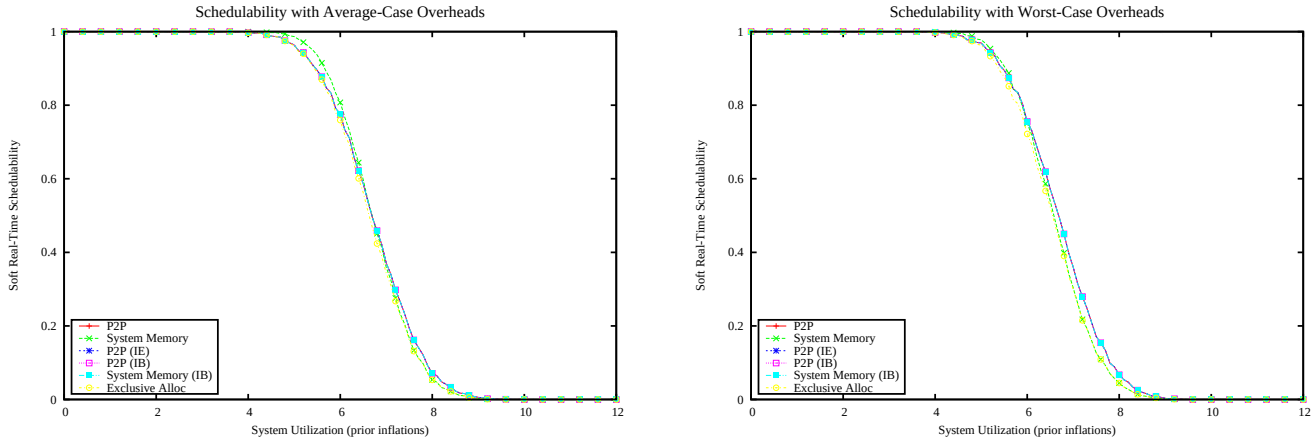

Figure 3513: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

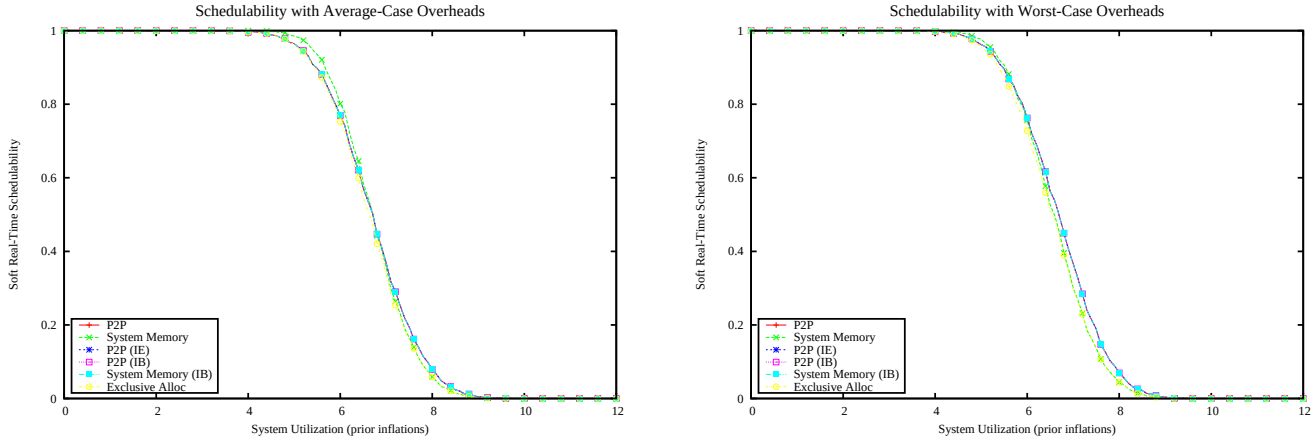

Figure 3514: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

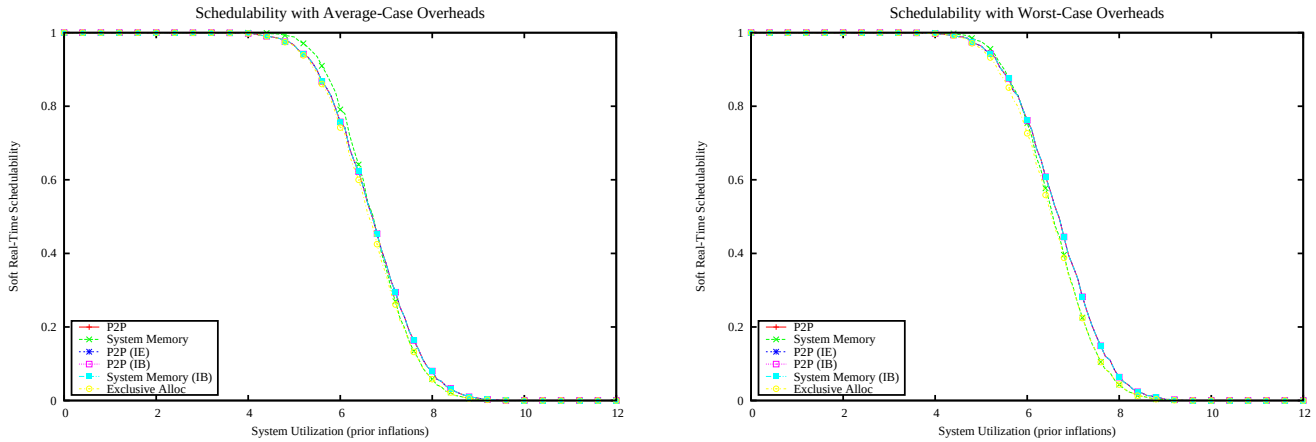

Figure 3515: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

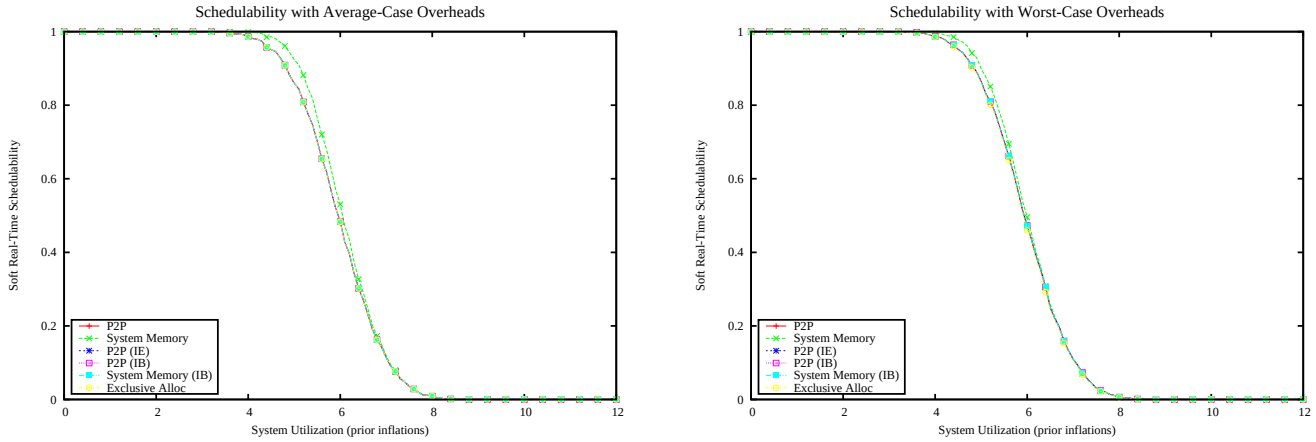

Figure 3516: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

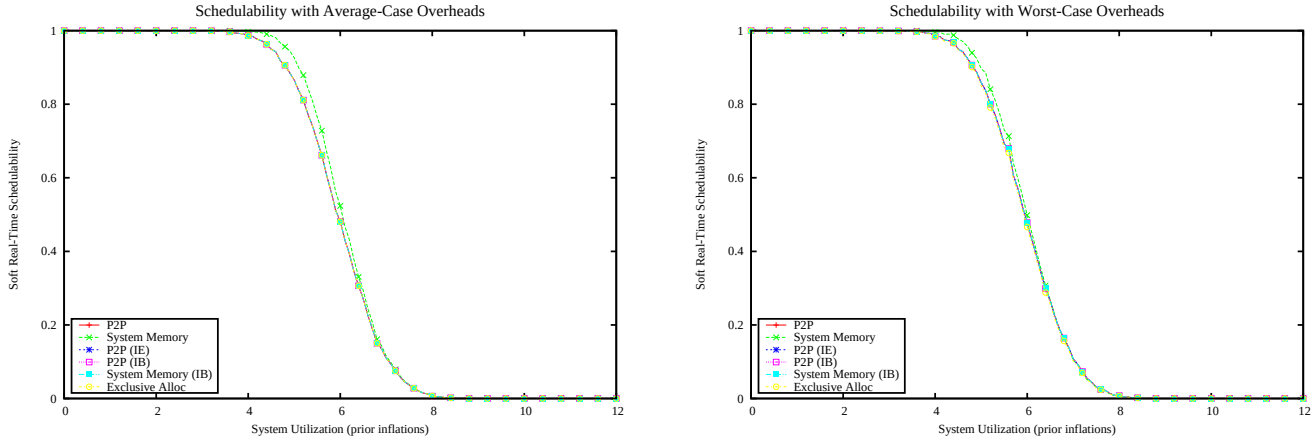

Figure 3517: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

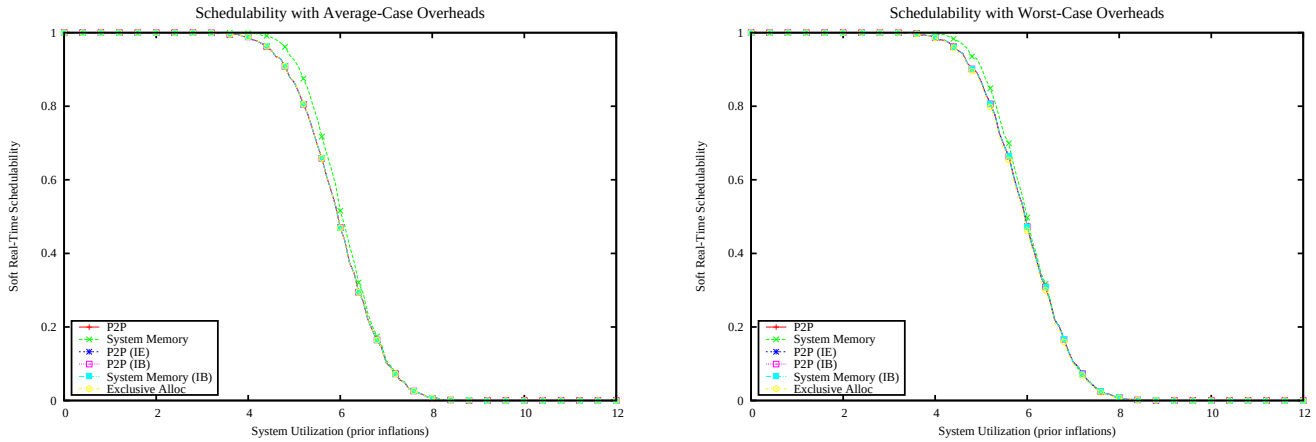

Figure 3518: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

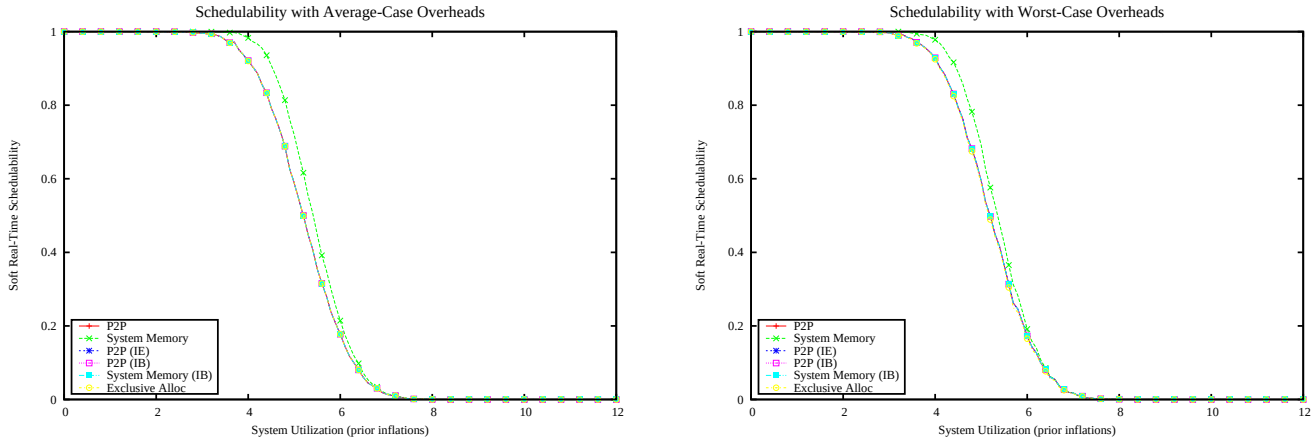

Figure 3519: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

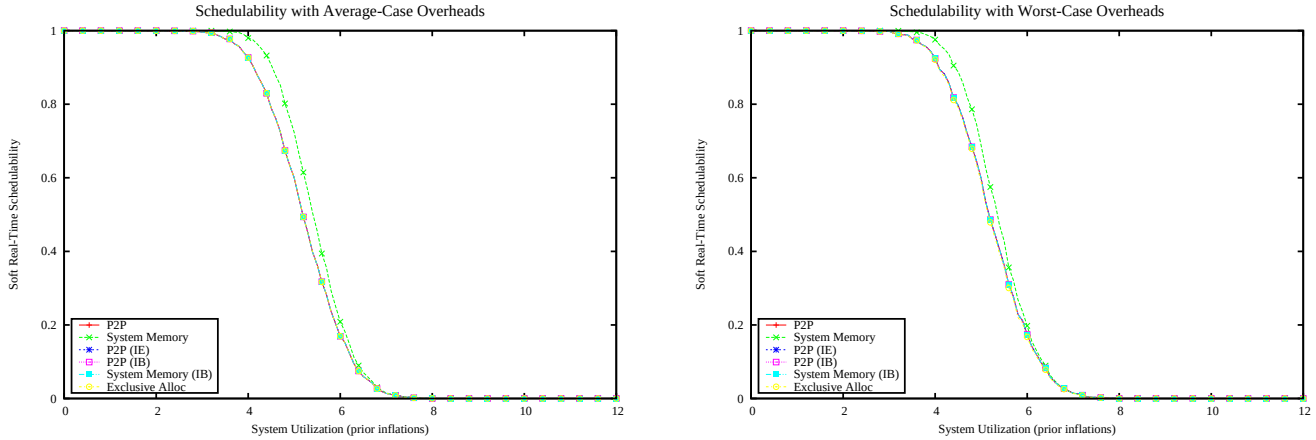

Figure 3520: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

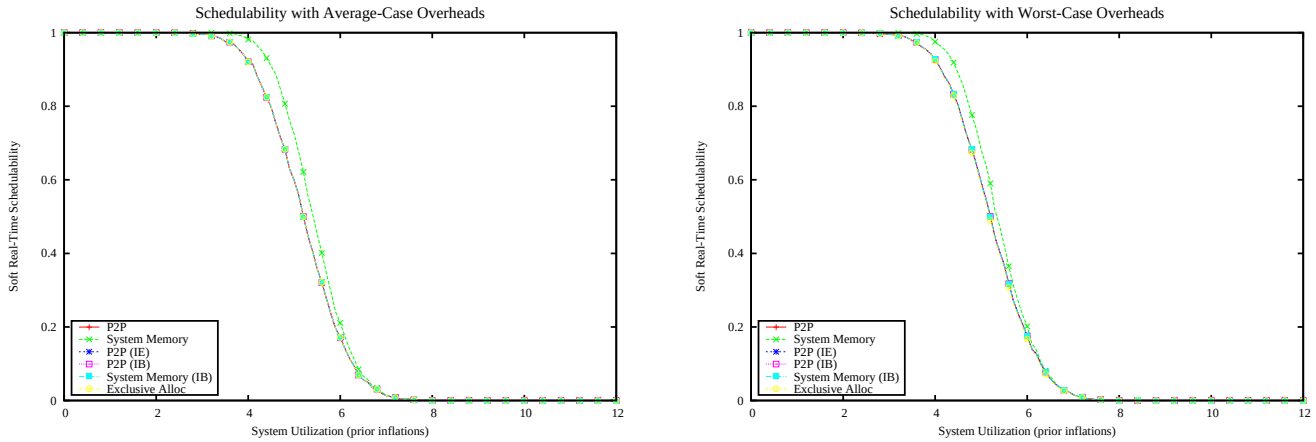

Figure 3521: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

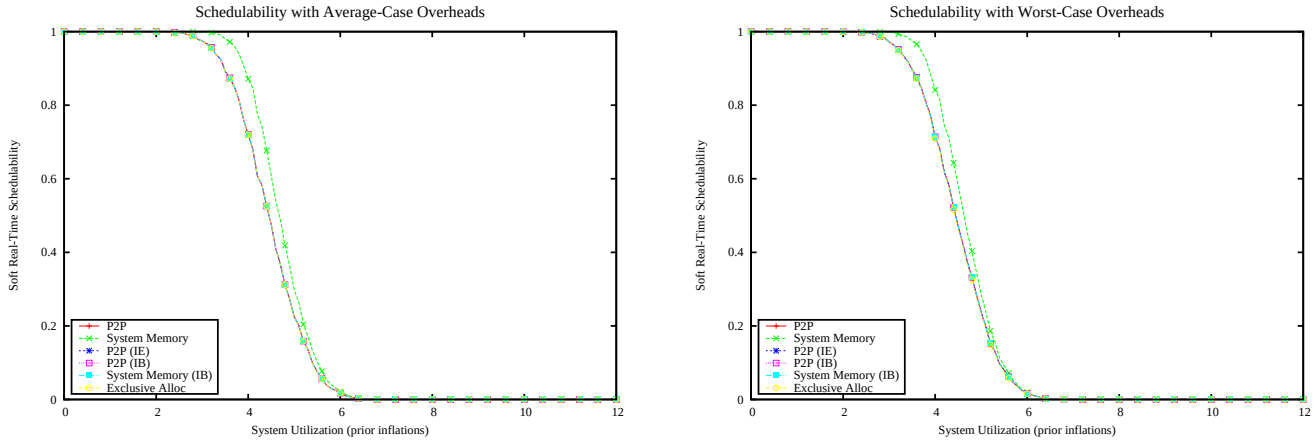

Figure 3522: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

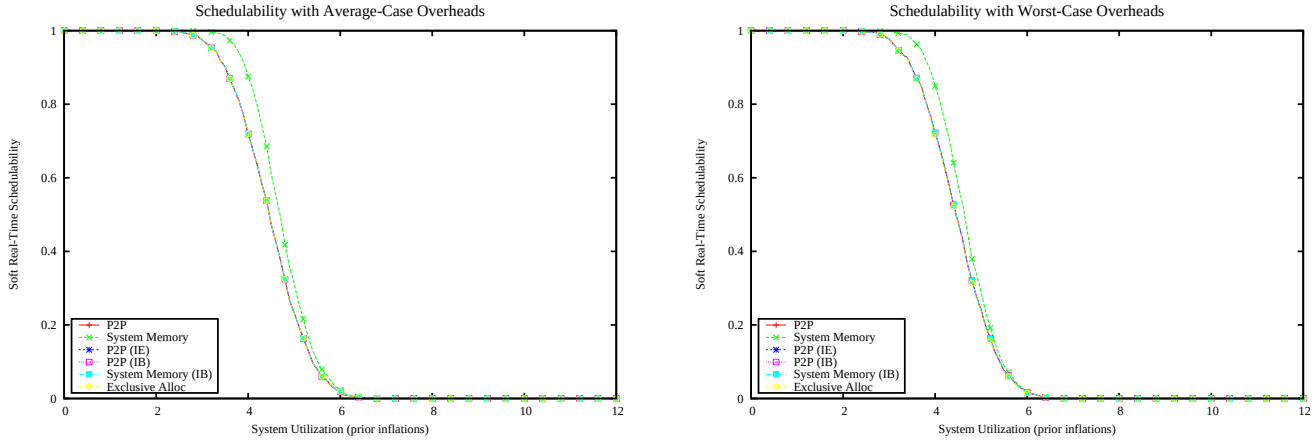

Figure 3523: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

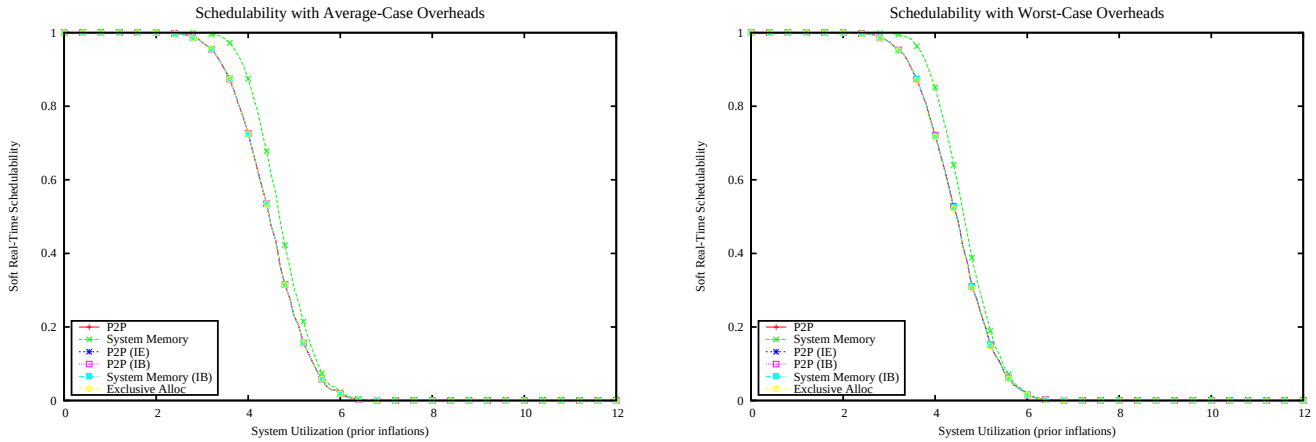

Figure 3524: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

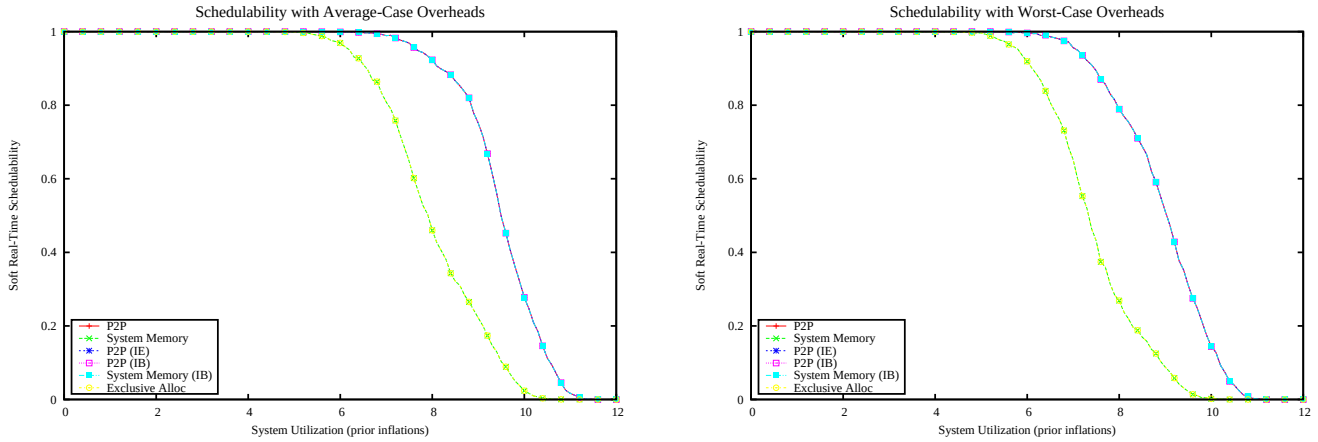

Figure 3525: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

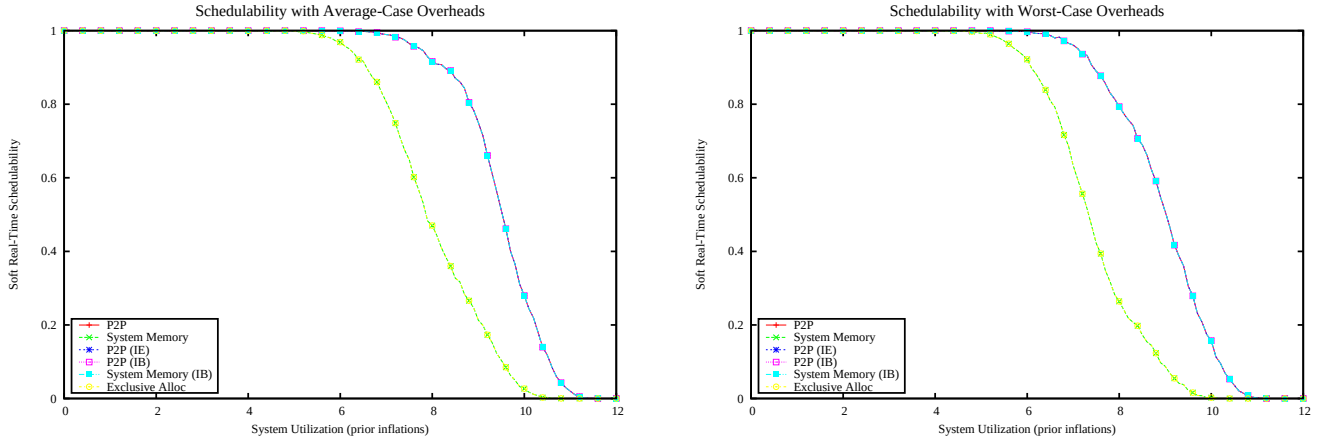

Figure 3526: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

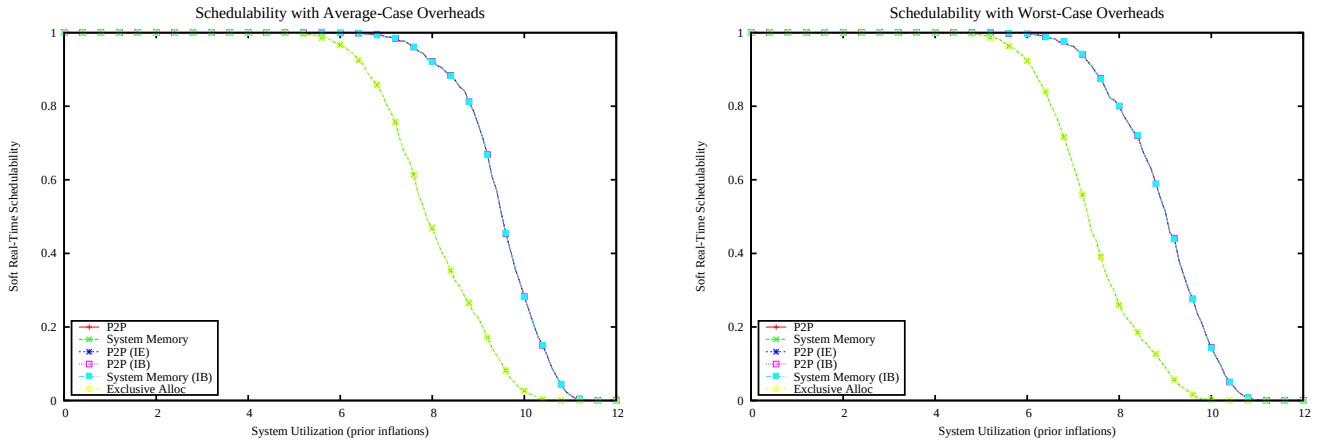

Figure 3527: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

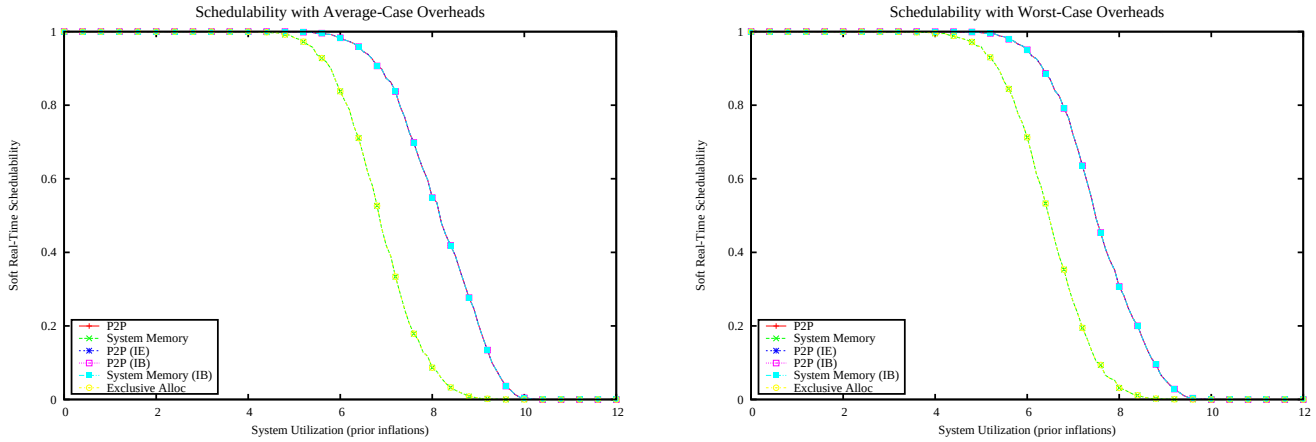

Figure 3528: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

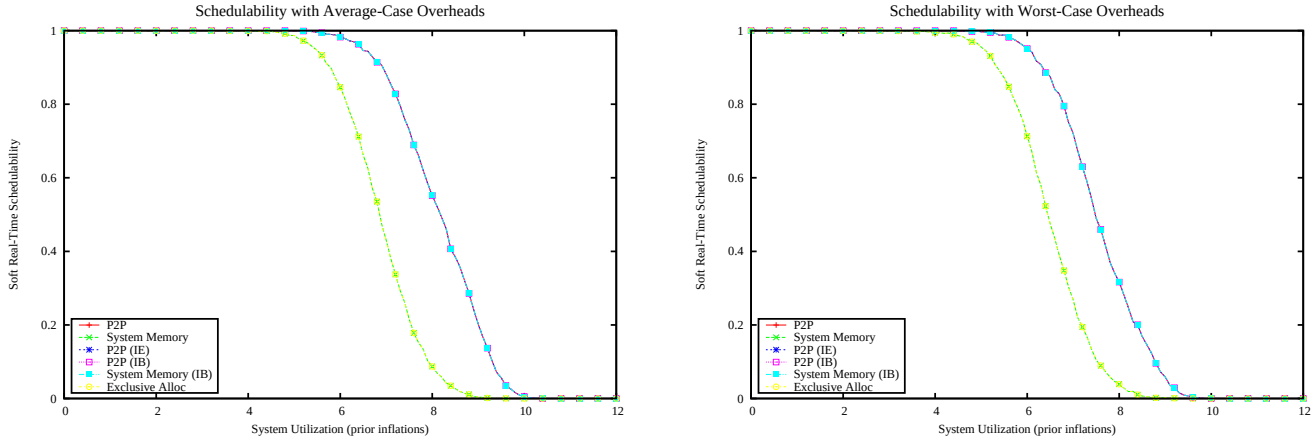

Figure 3529: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

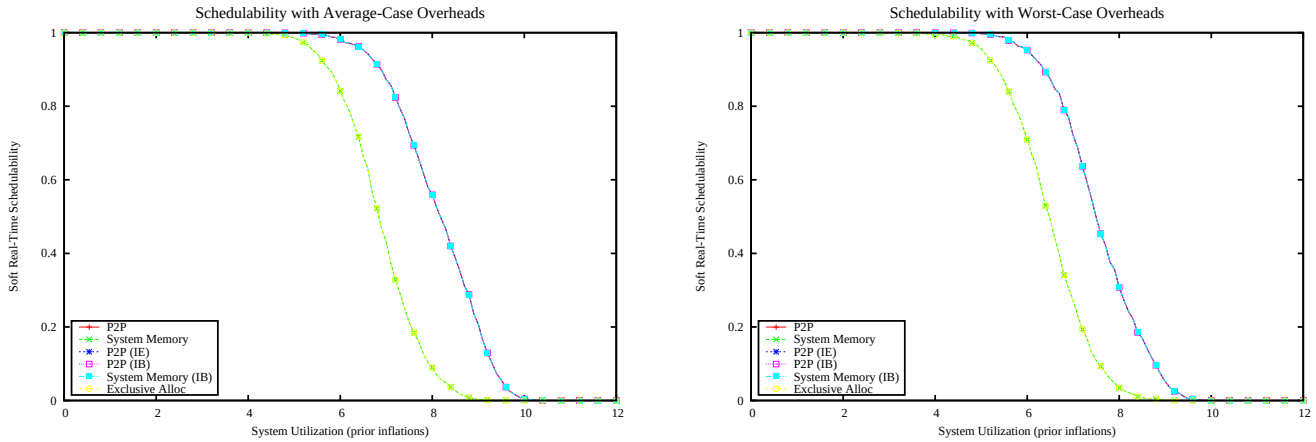

Figure 3530: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

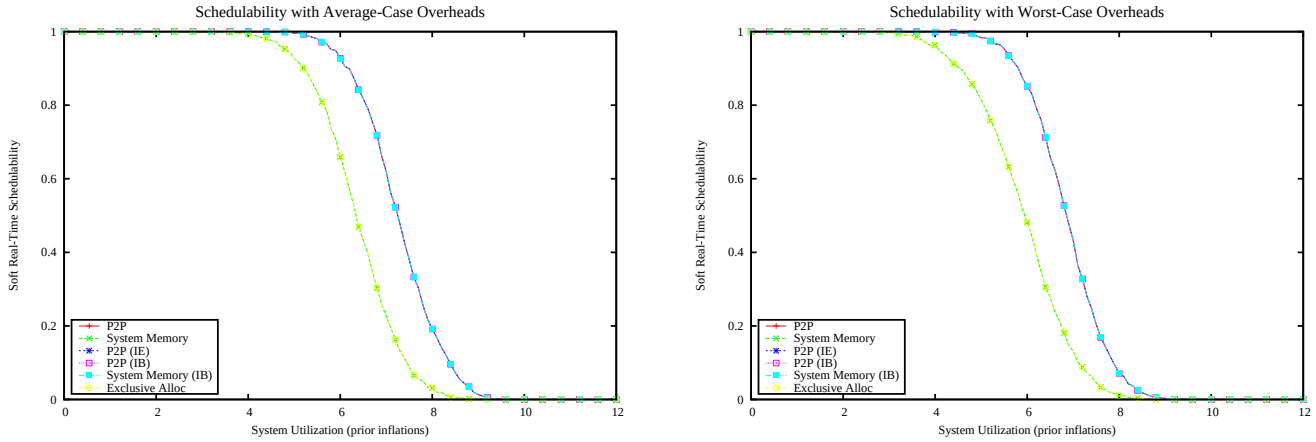

Figure 3531: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

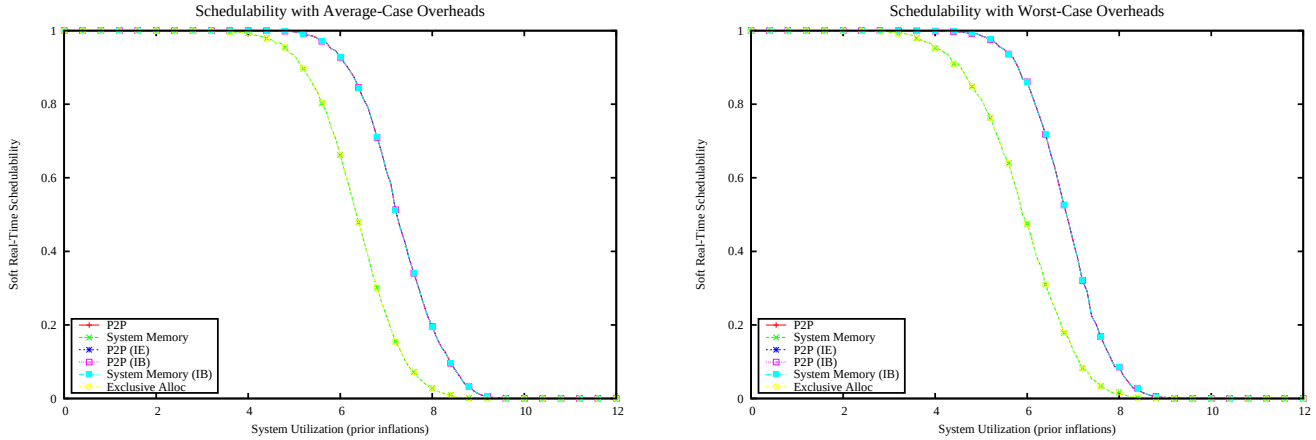

Figure 3532: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

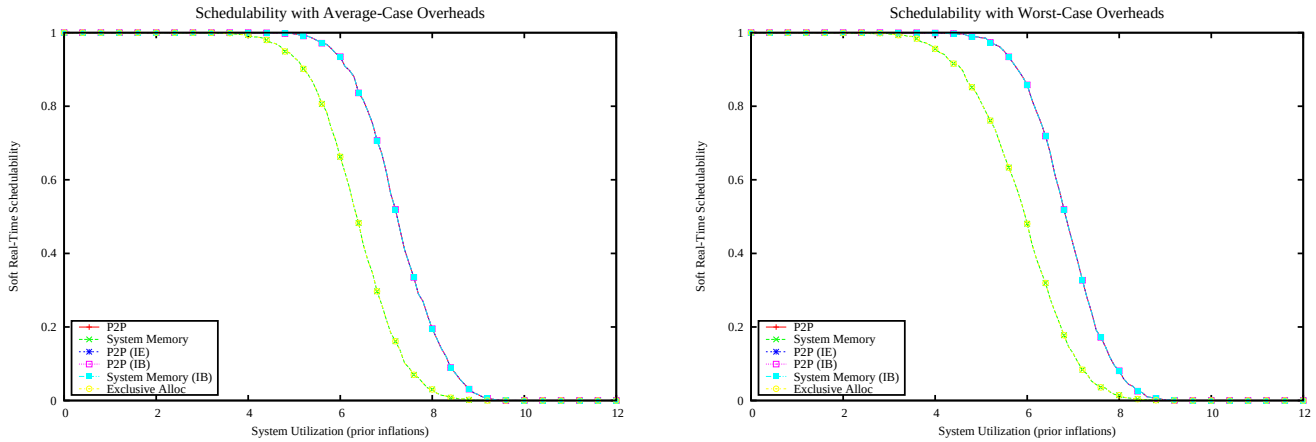

Figure 3533: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

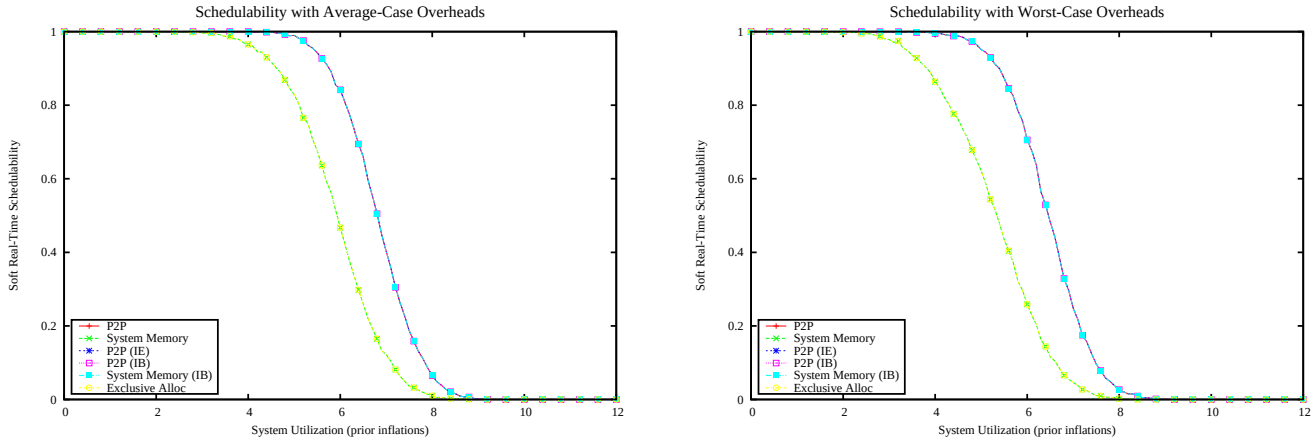

Figure 3534: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

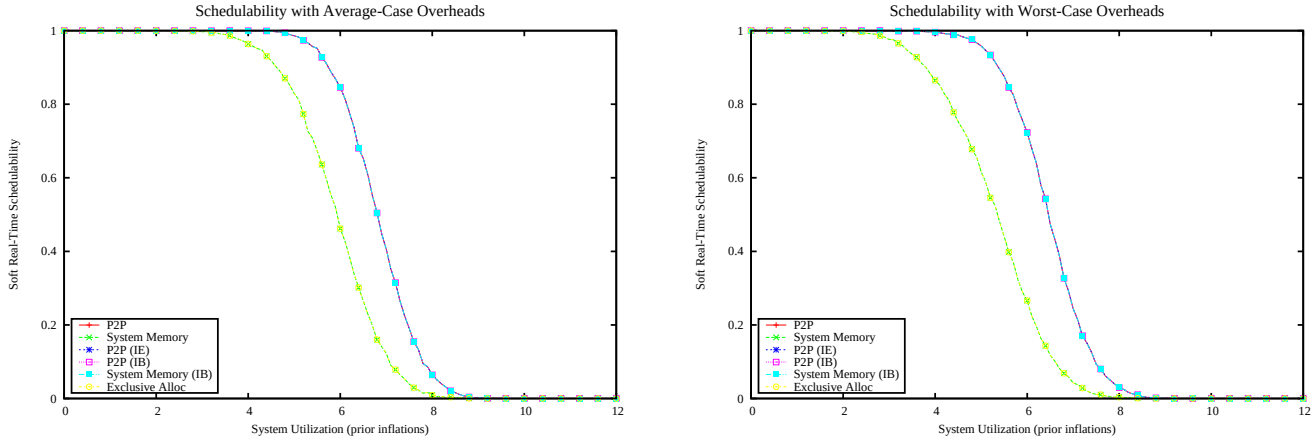

Figure 3535: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

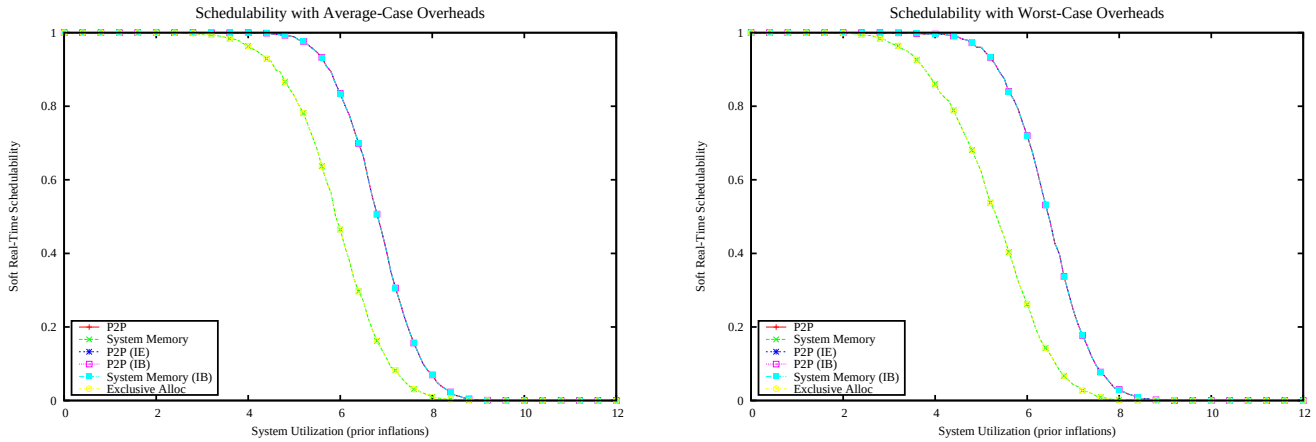

Figure 3536: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

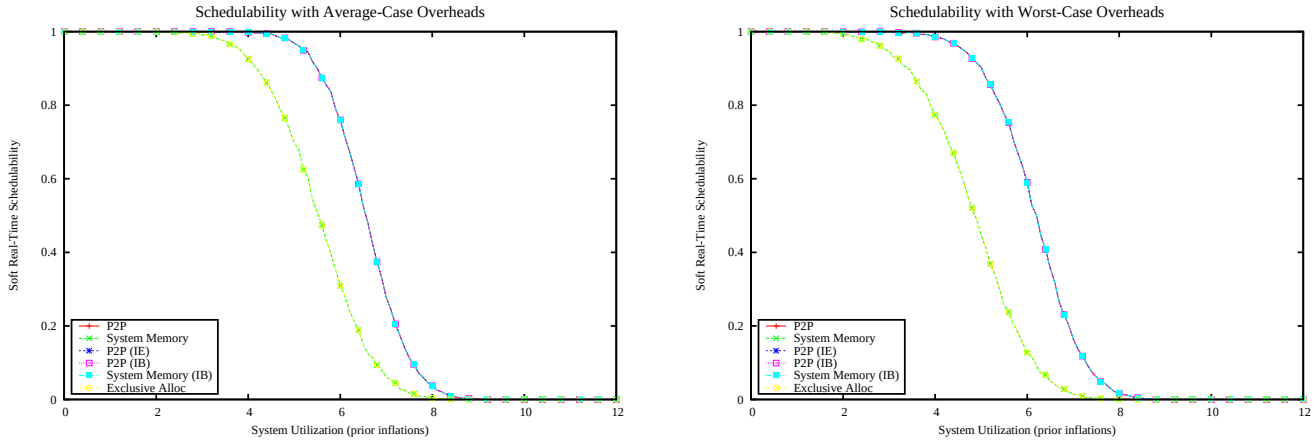

Figure 3537: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

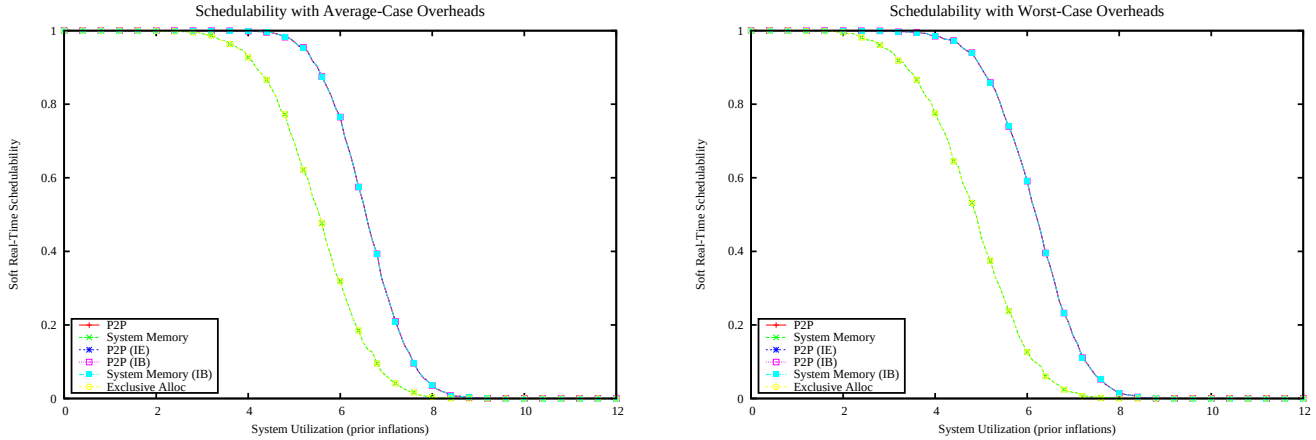

Figure 3538: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

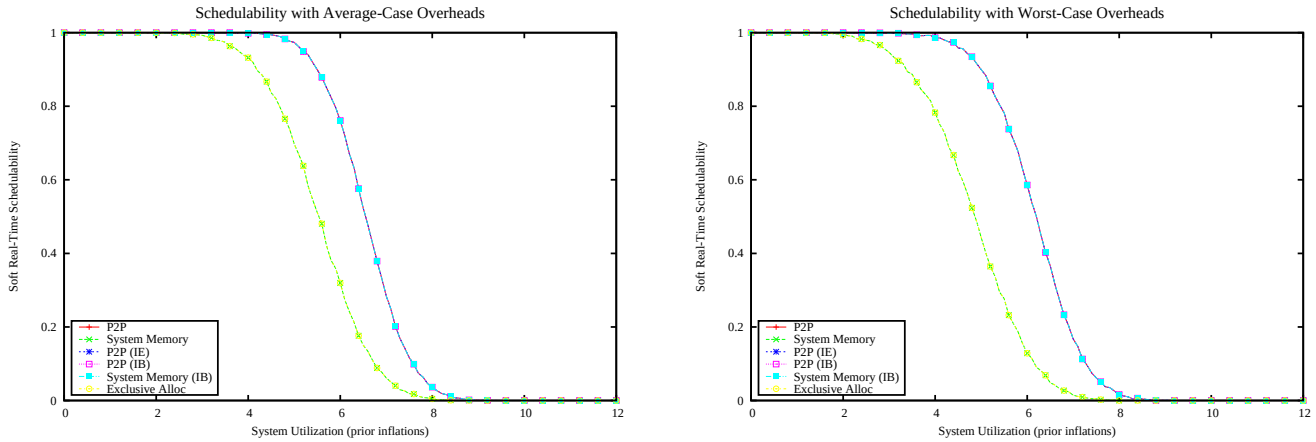

Figure 3539: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

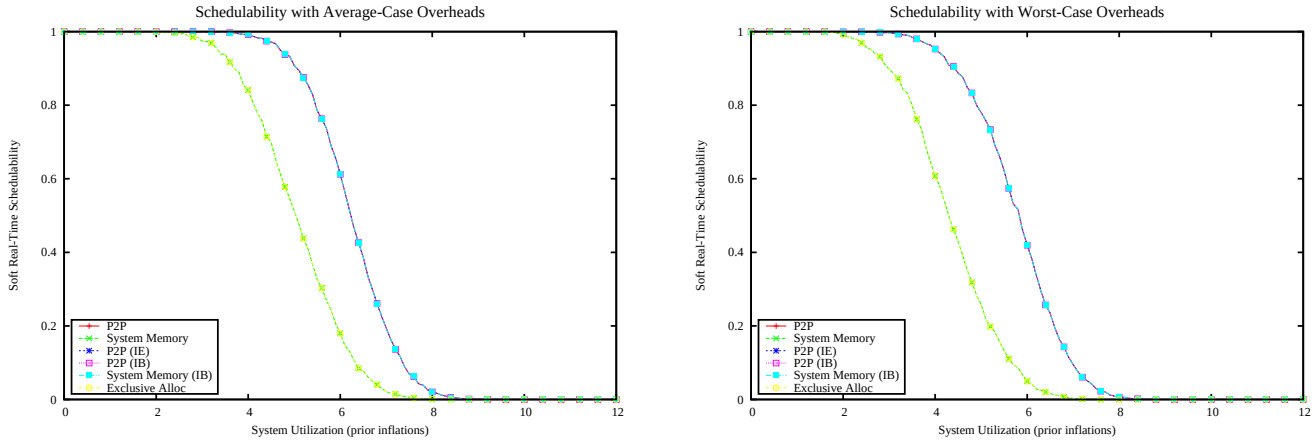

Figure 3540: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

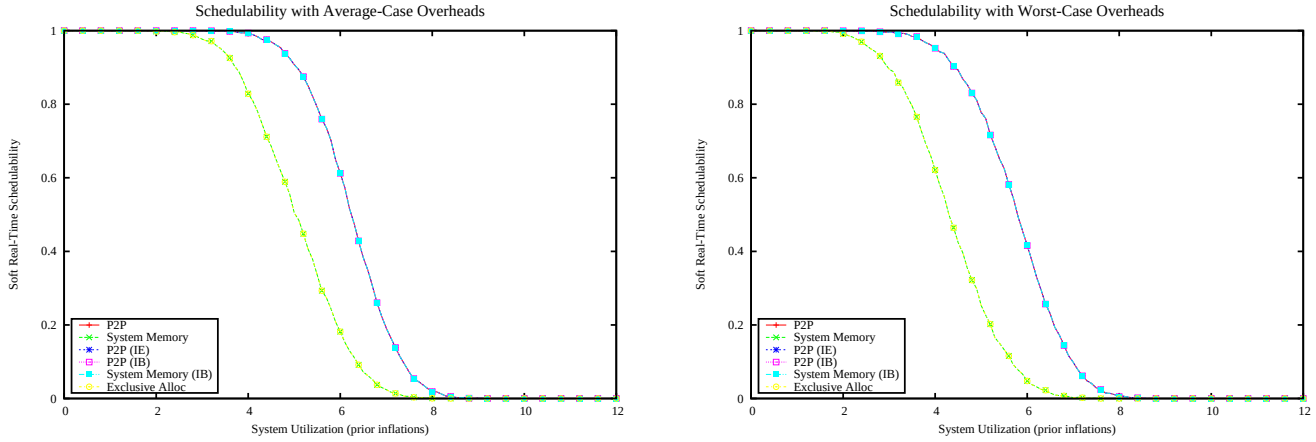

Figure 3541: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

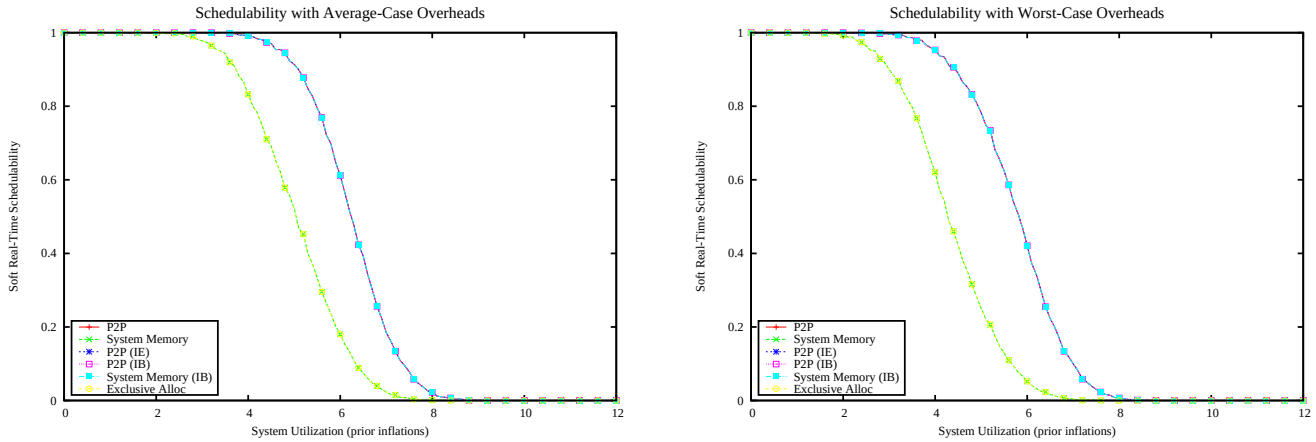

Figure 3542: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

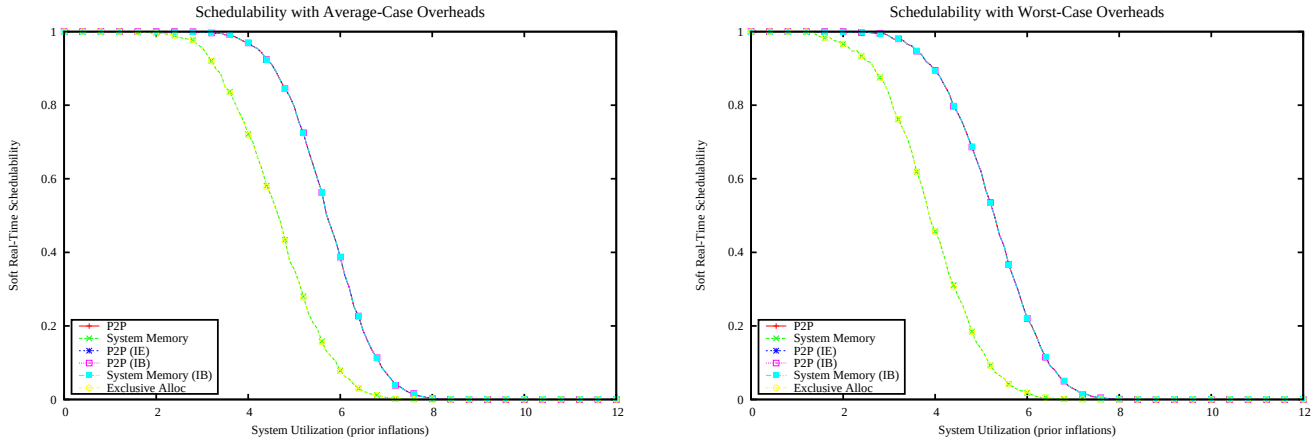

Figure 3543: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

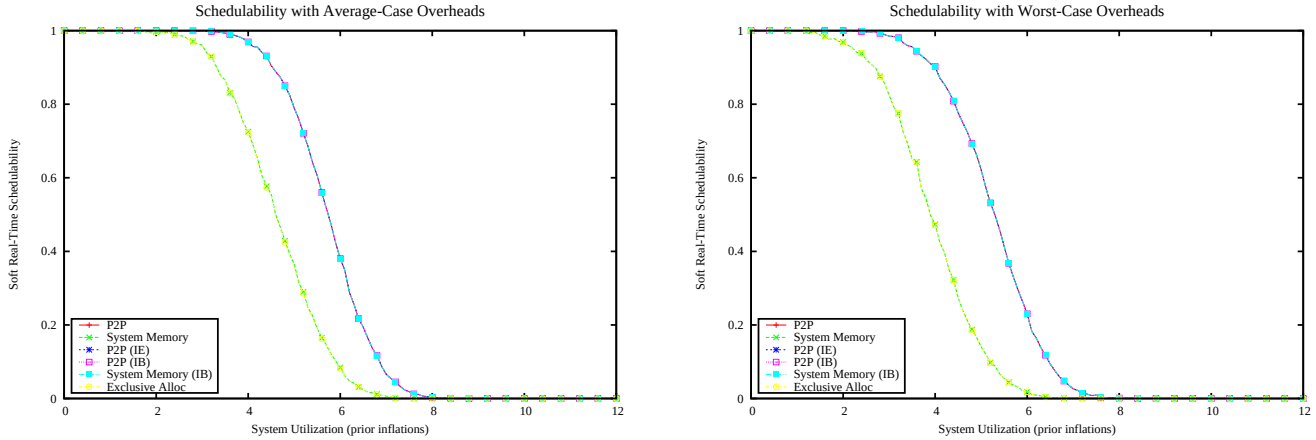

Figure 3544: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

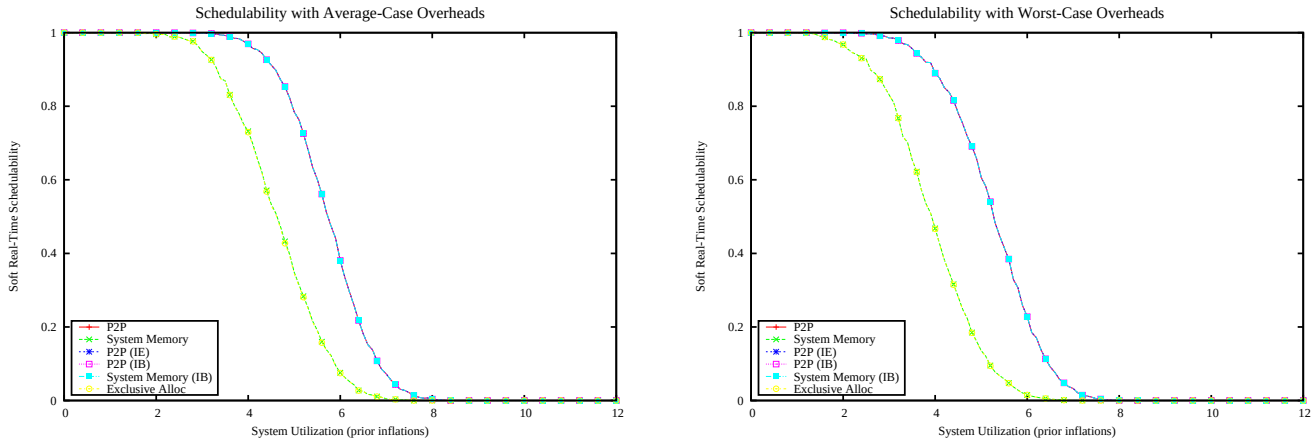

Figure 3545: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

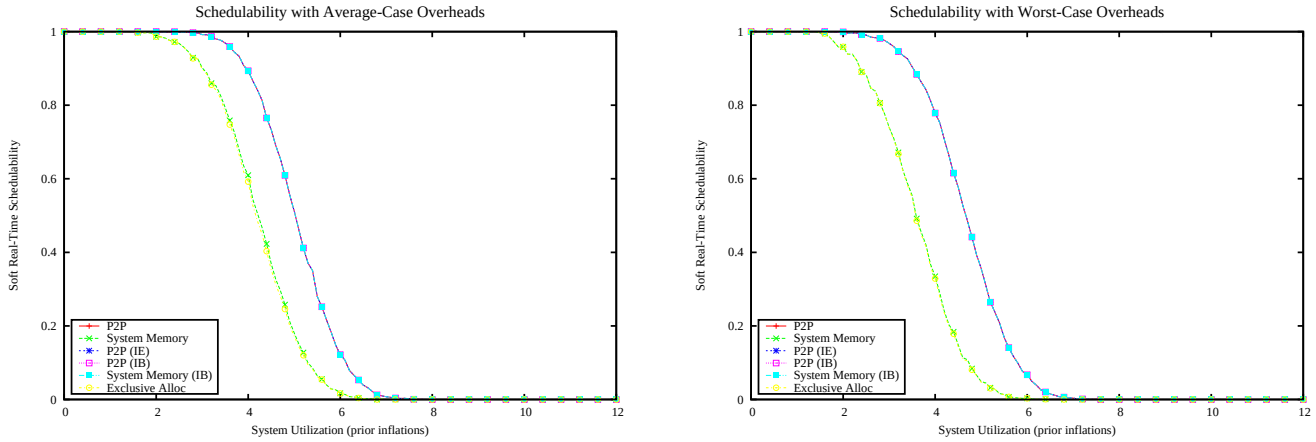

Figure 3546: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

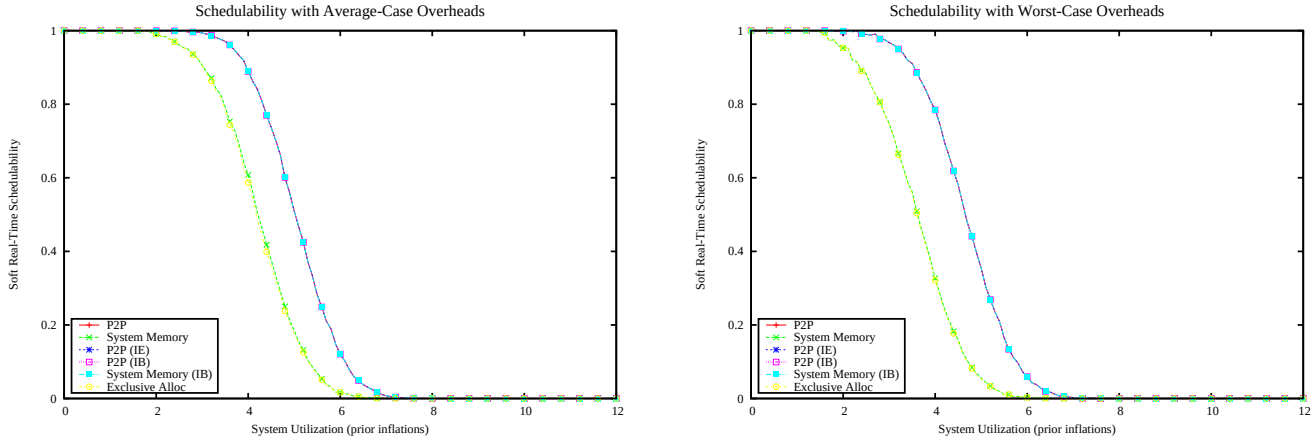

Figure 3547: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

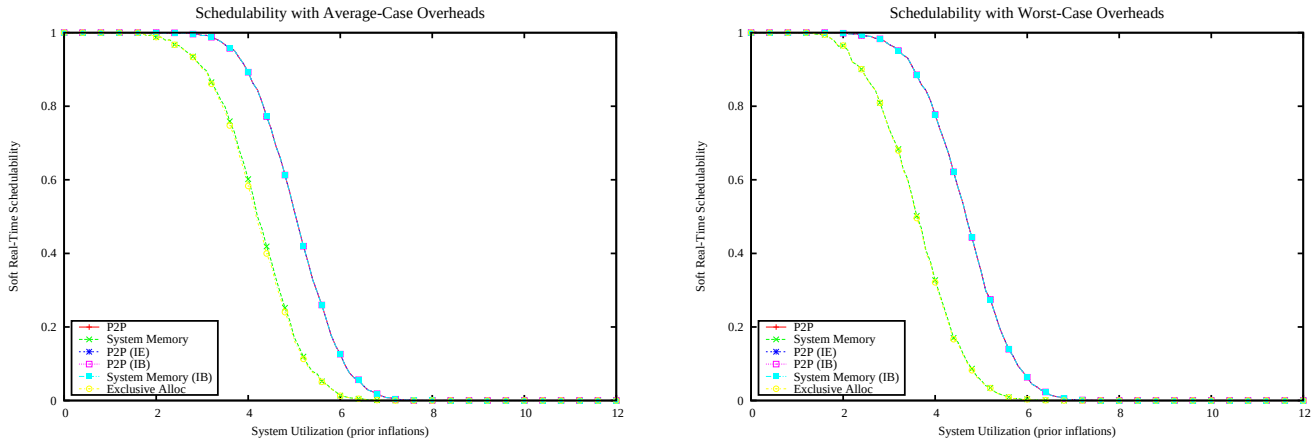

Figure 3548: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

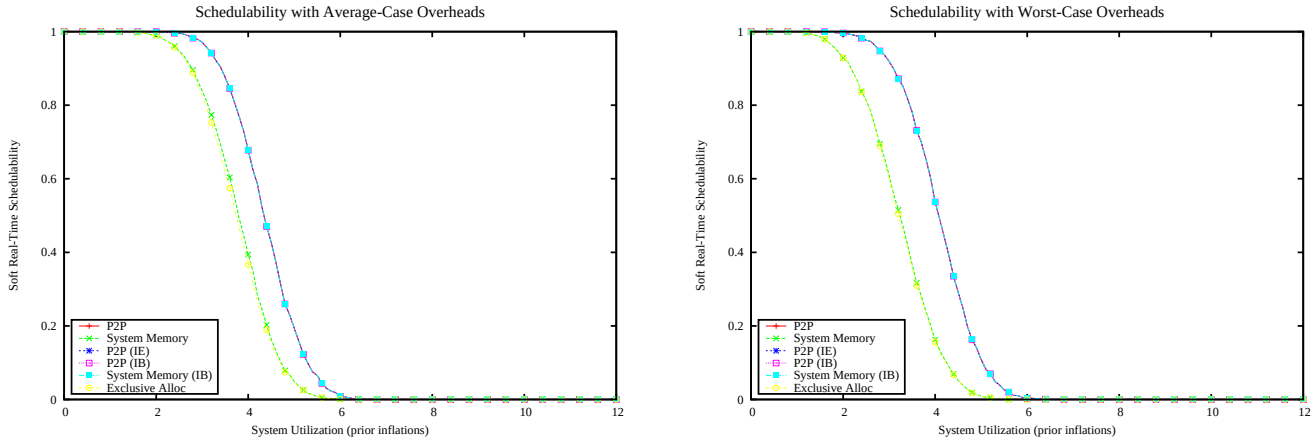

Figure 3549: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

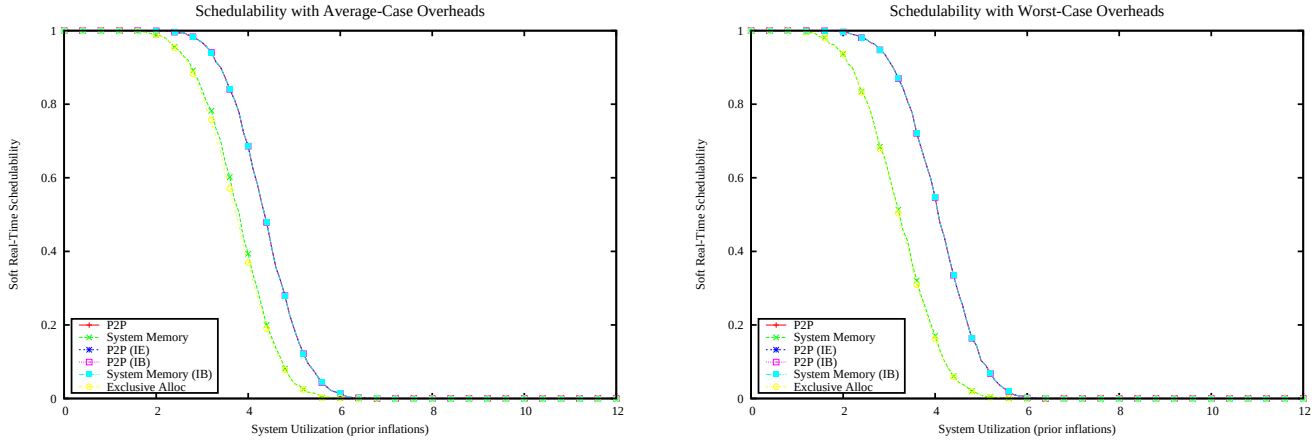

Figure 3550: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

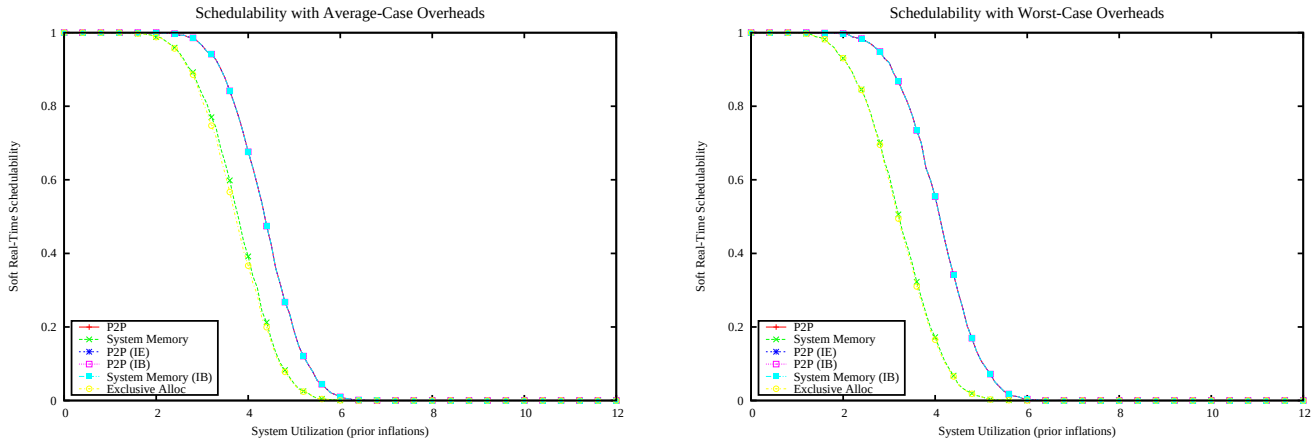

Figure 3551: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

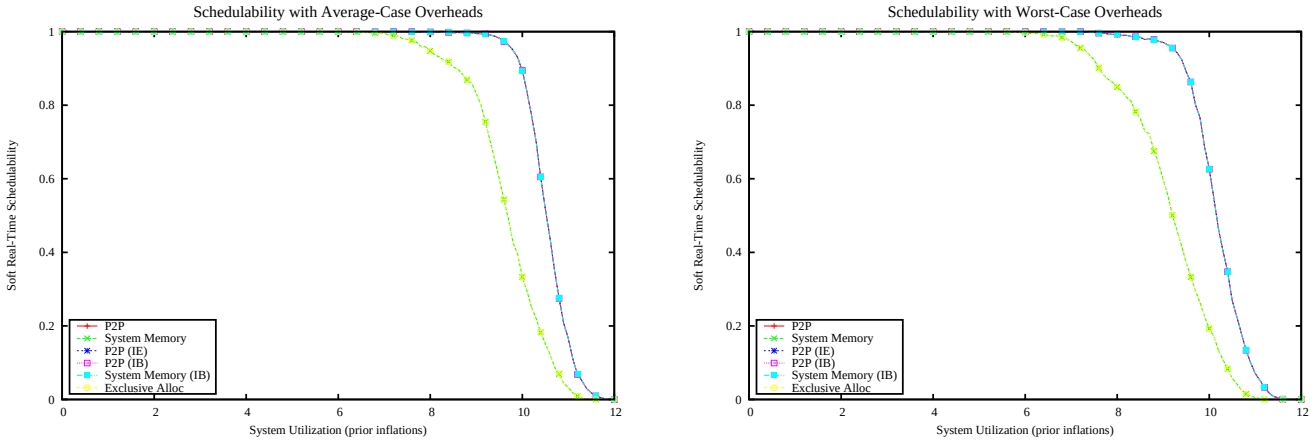

Figure 3552: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

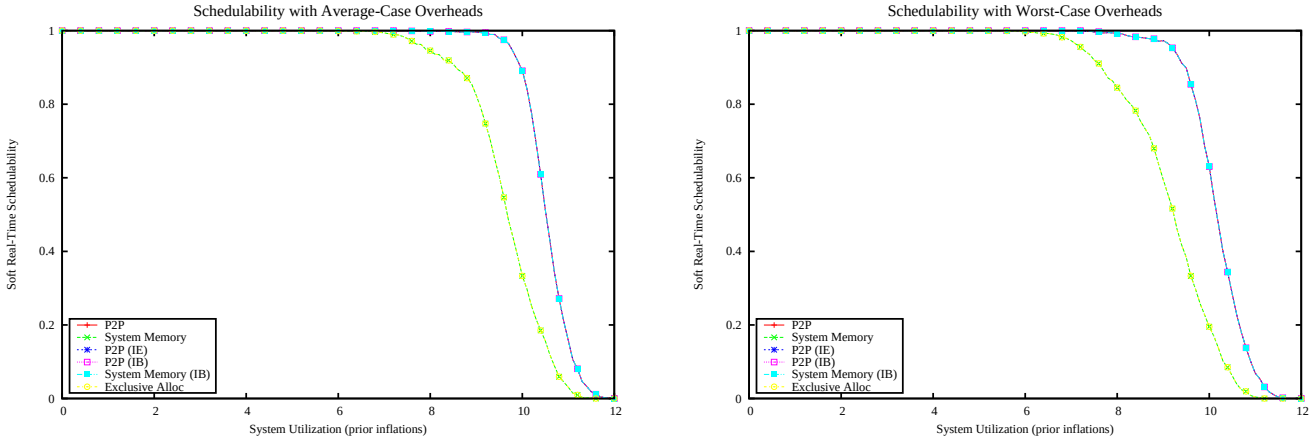

Figure 3553: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

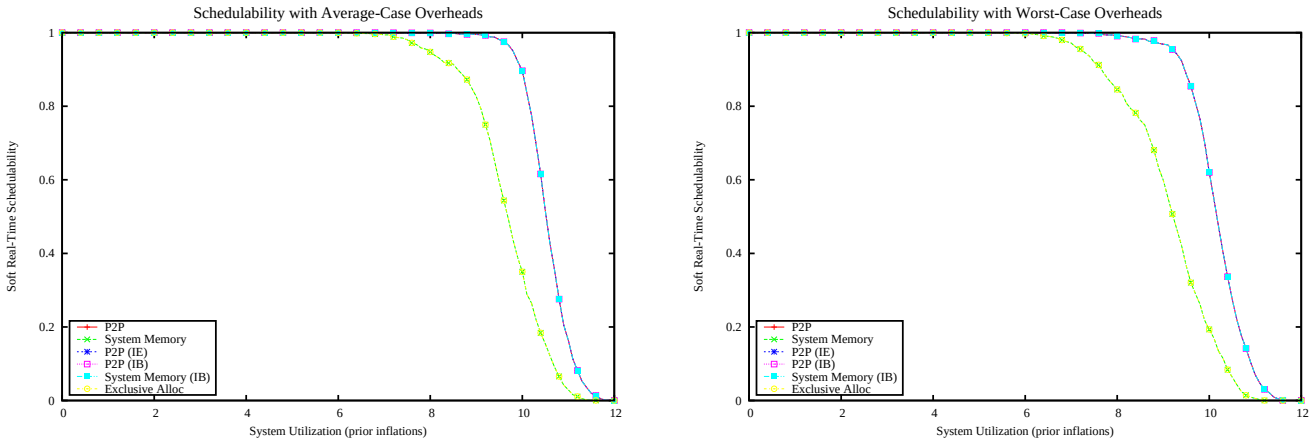

Figure 3554: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

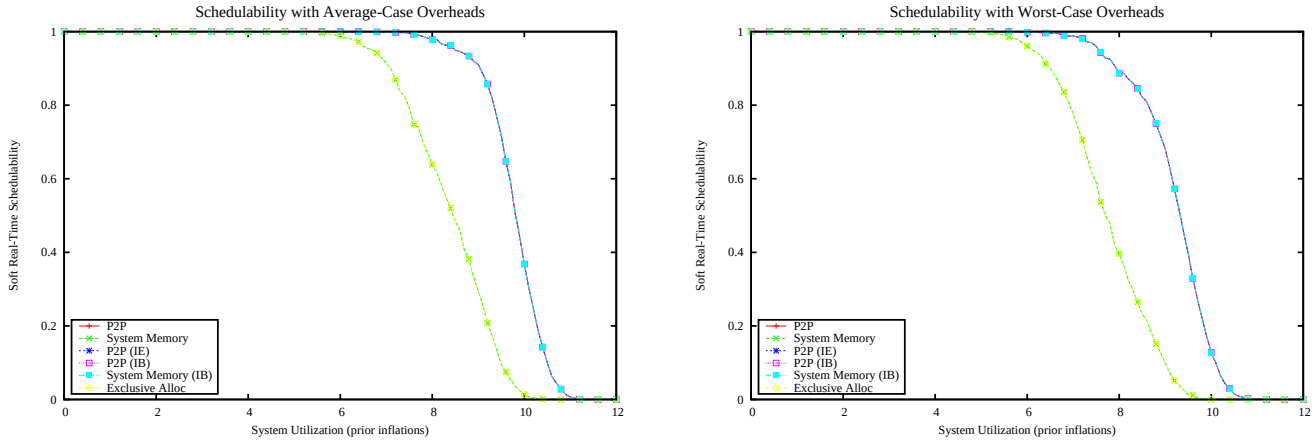

Figure 3555: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

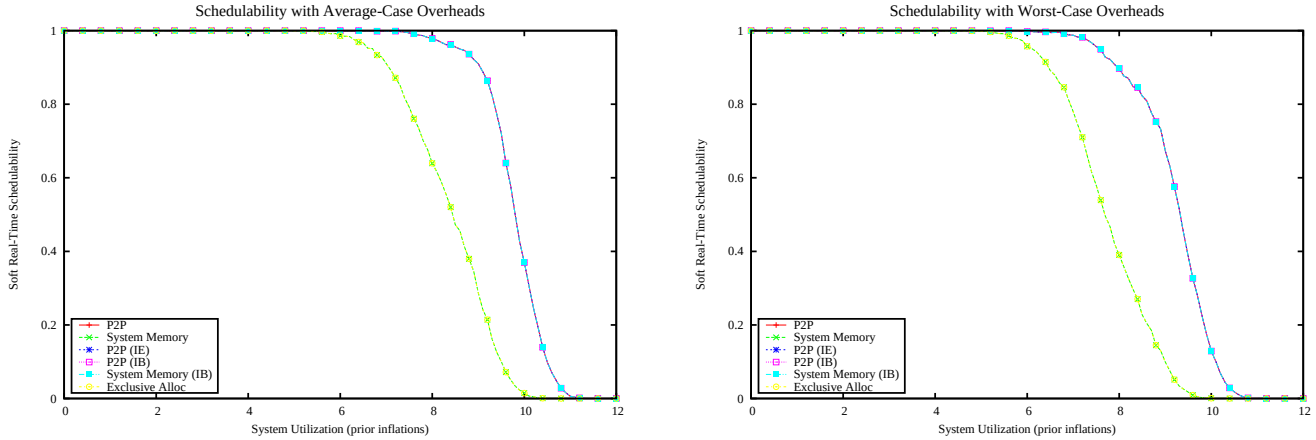

Figure 3556: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

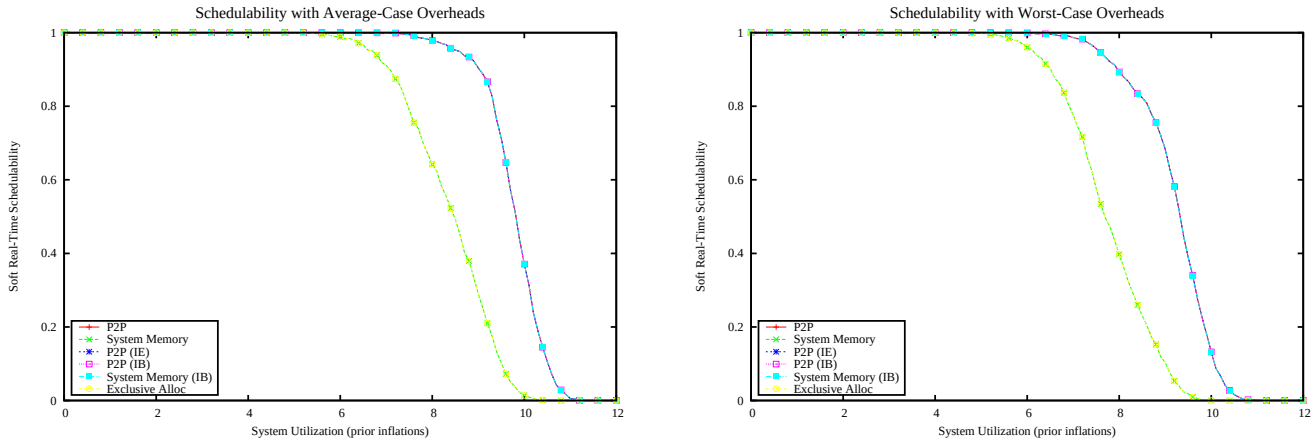

Figure 3557: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

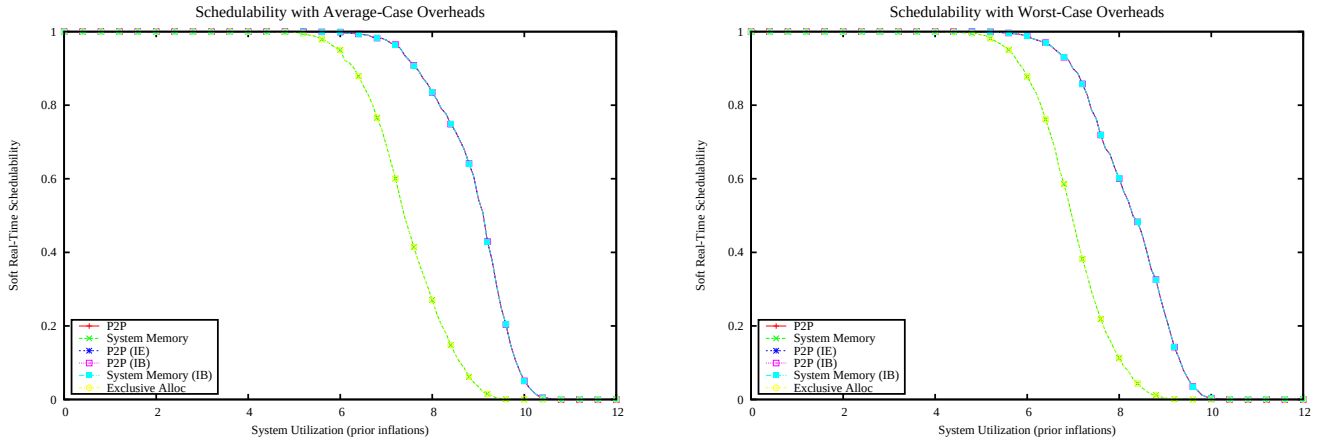

Figure 3558: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

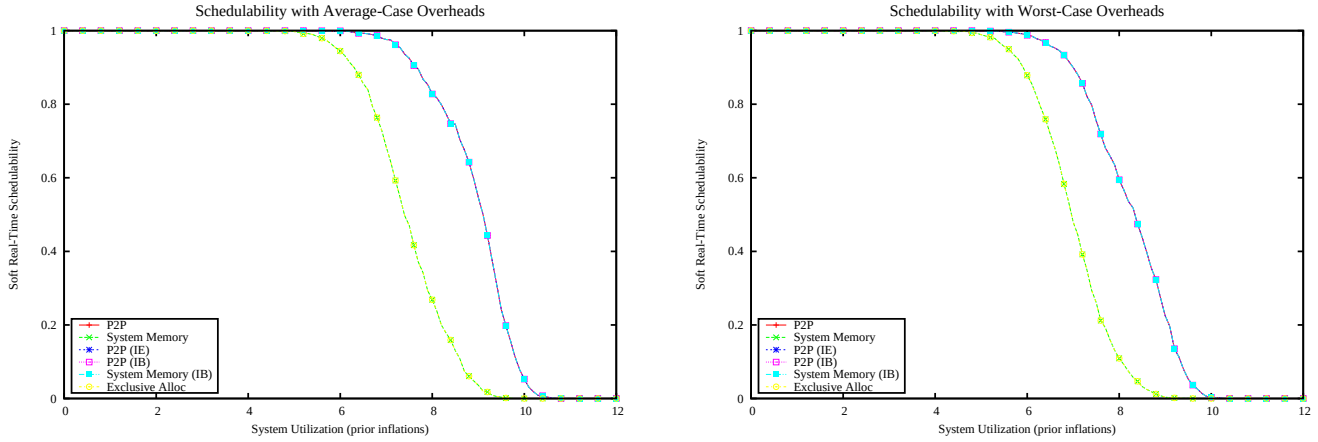

Figure 3559: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

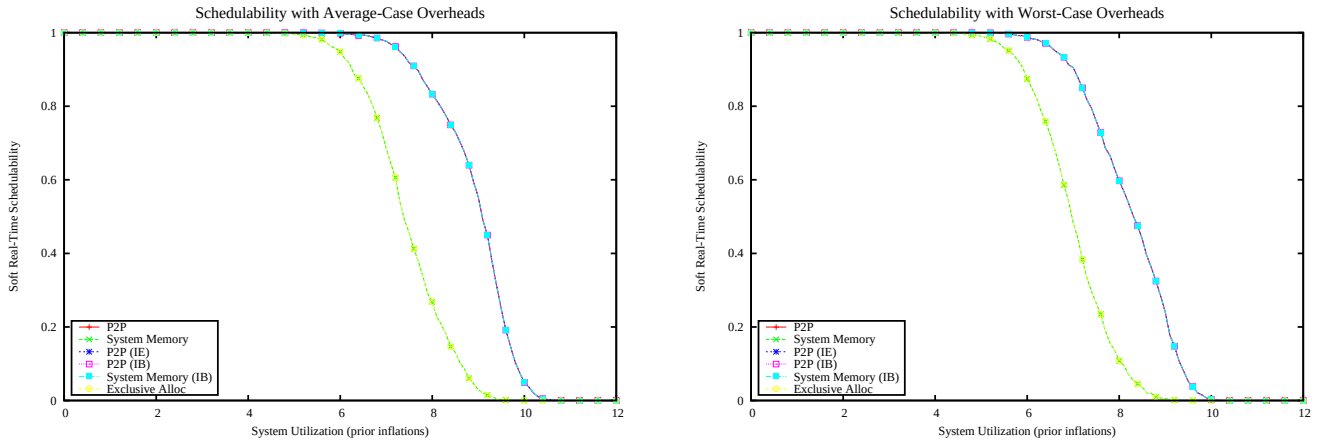

Figure 3560: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

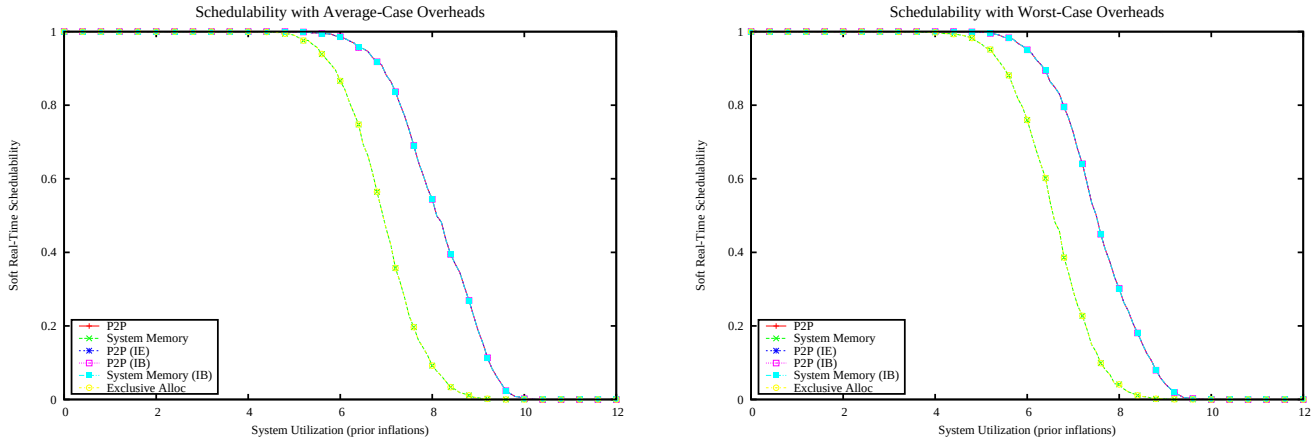

Figure 3561: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

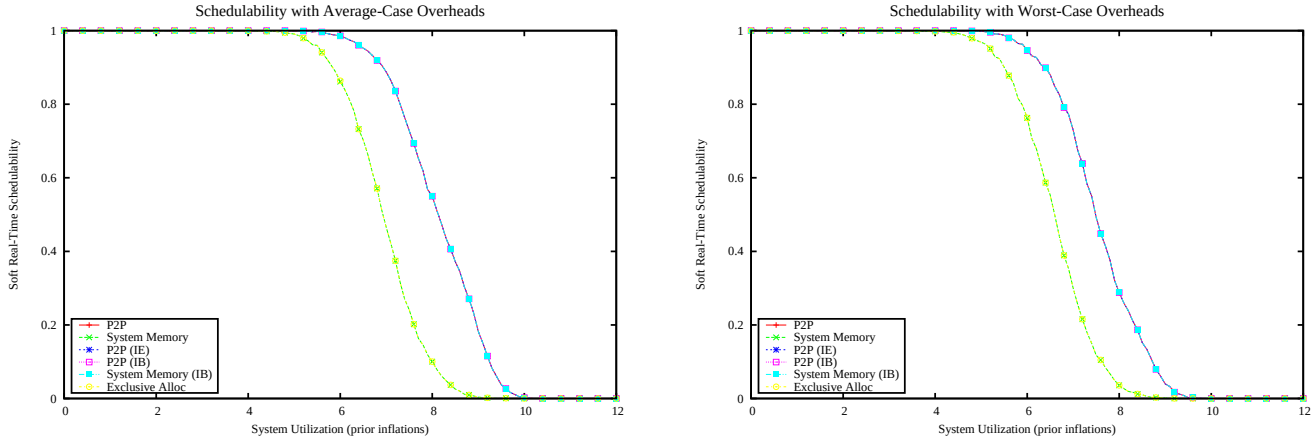

Figure 3562: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

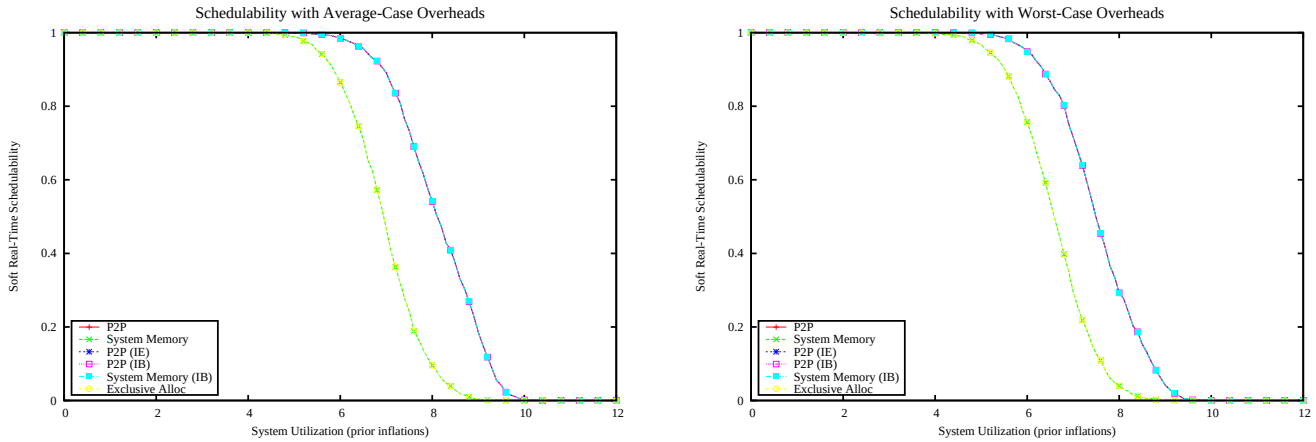

Figure 3563: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

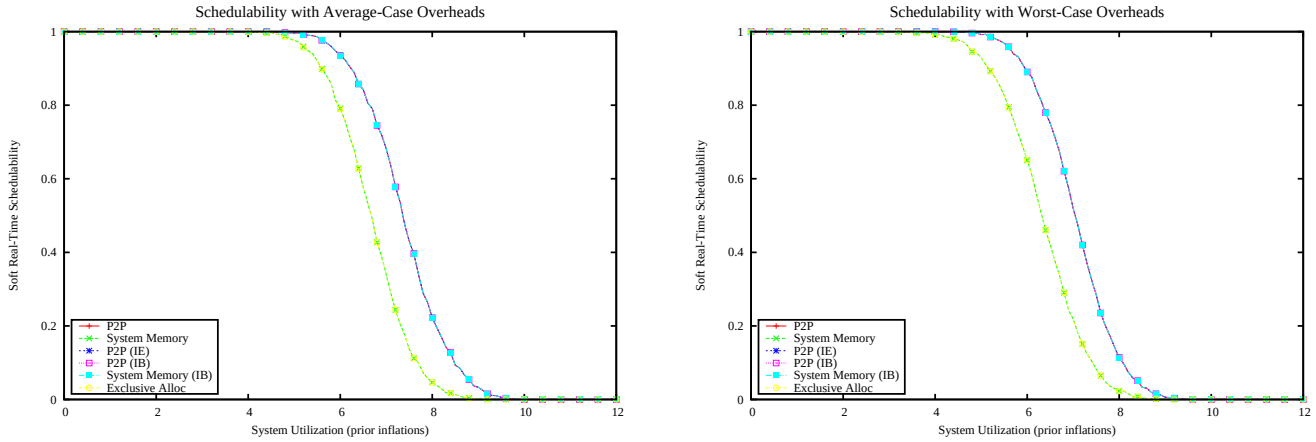

Figure 3564: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

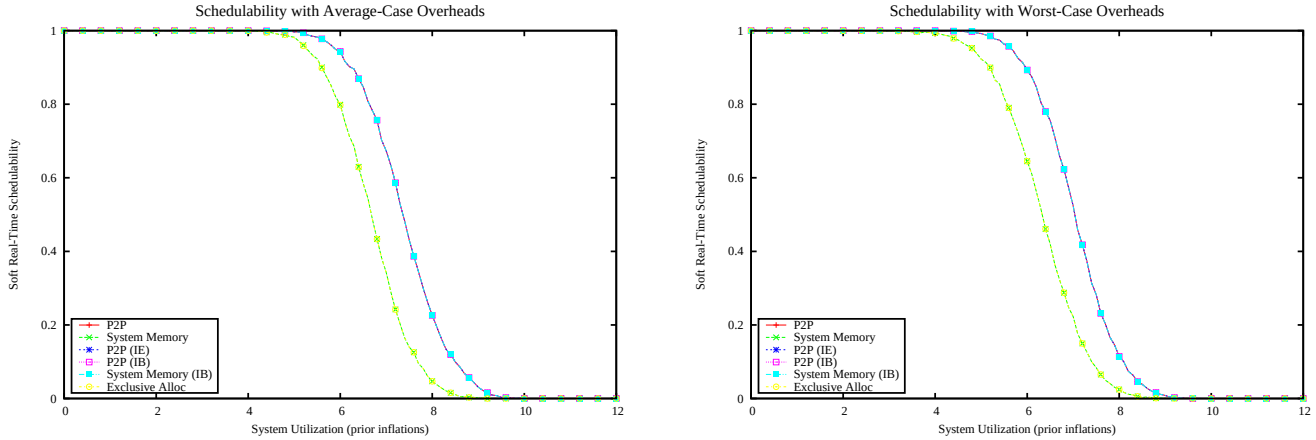

Figure 3565: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

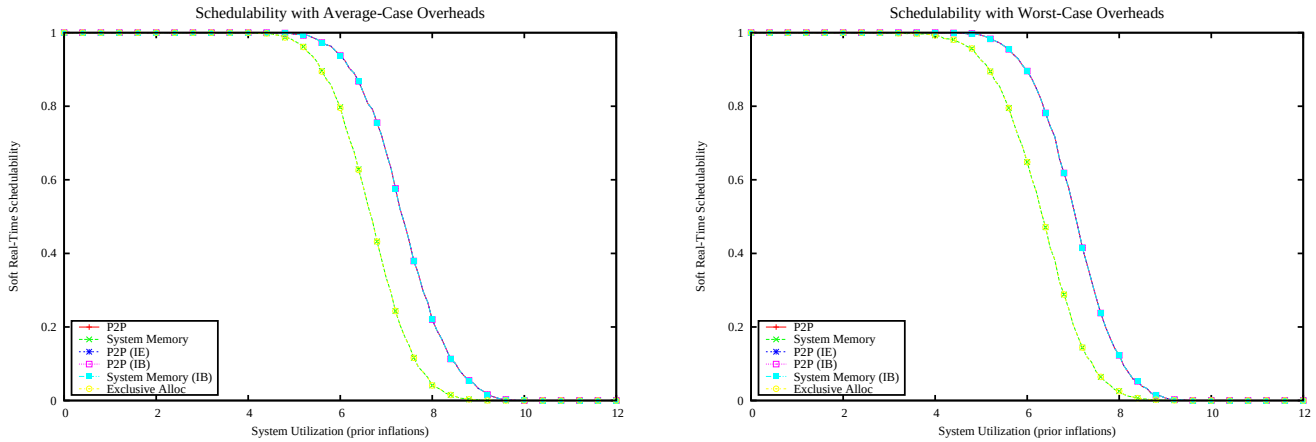

Figure 3566: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

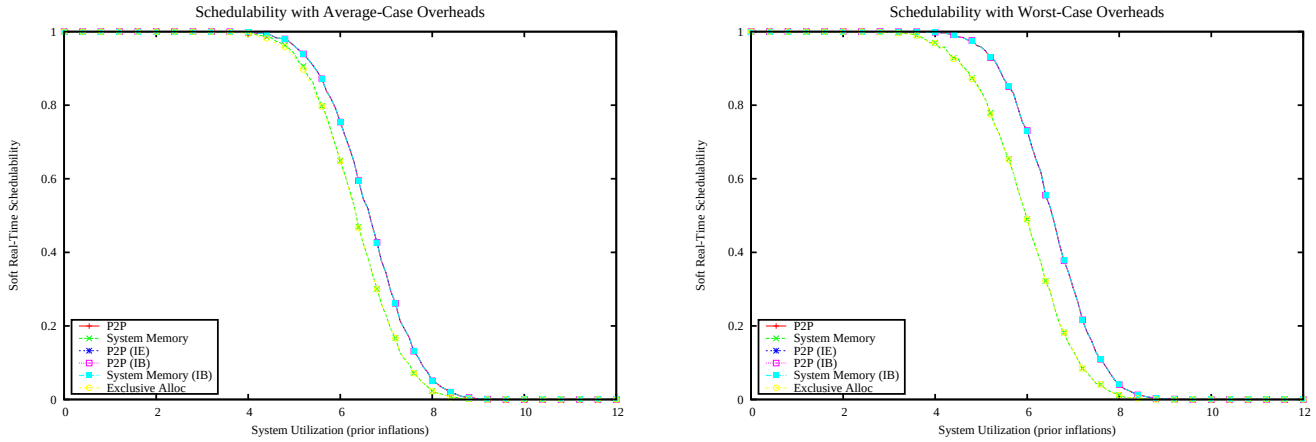

Figure 3567: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

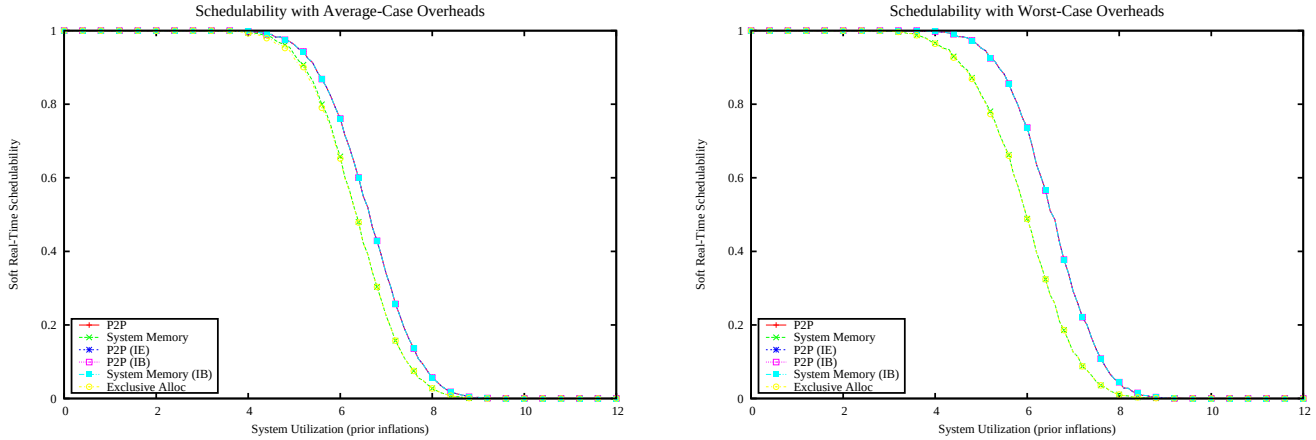

Figure 3568: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

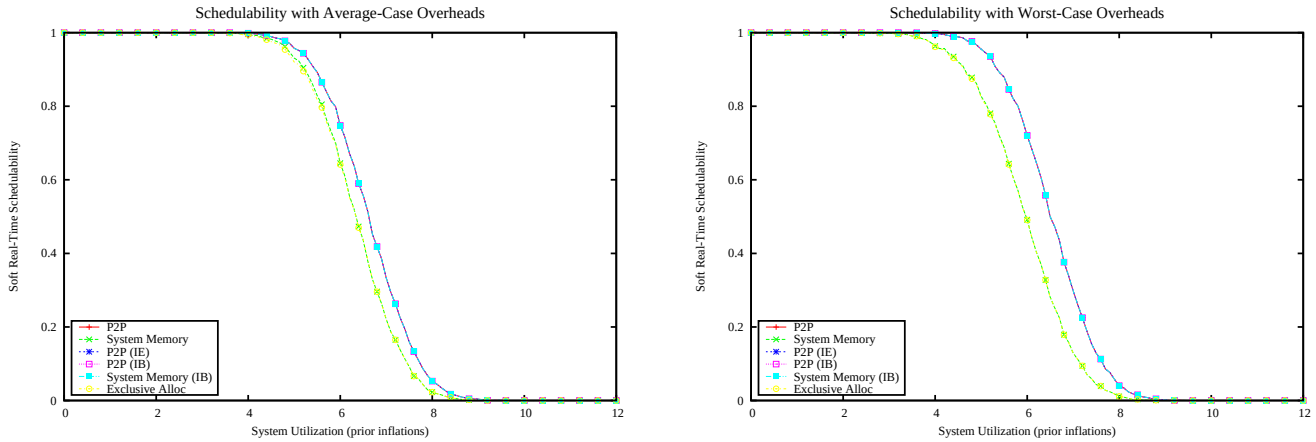

Figure 3569: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

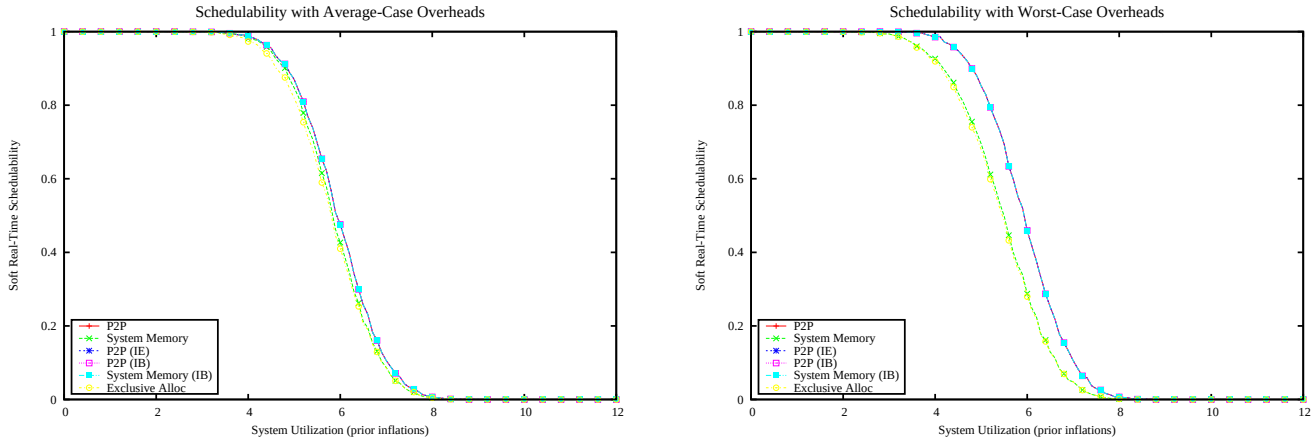

Figure 3570: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

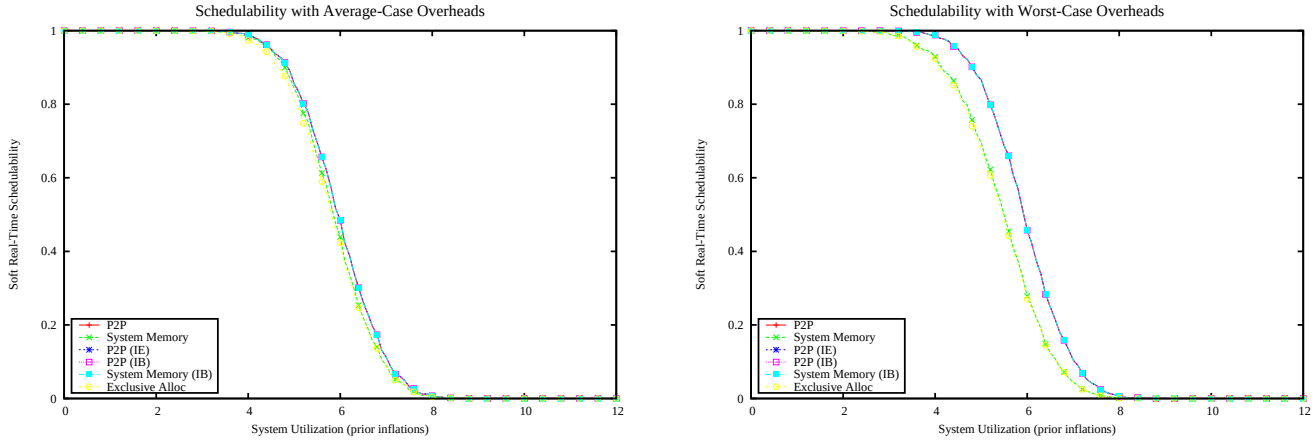

Figure 3571: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

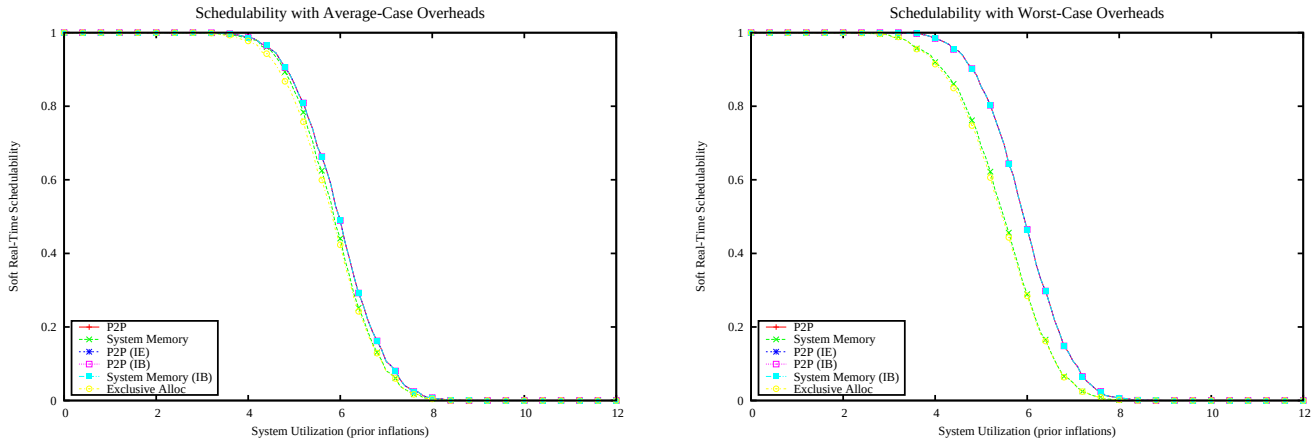

Figure 3572: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

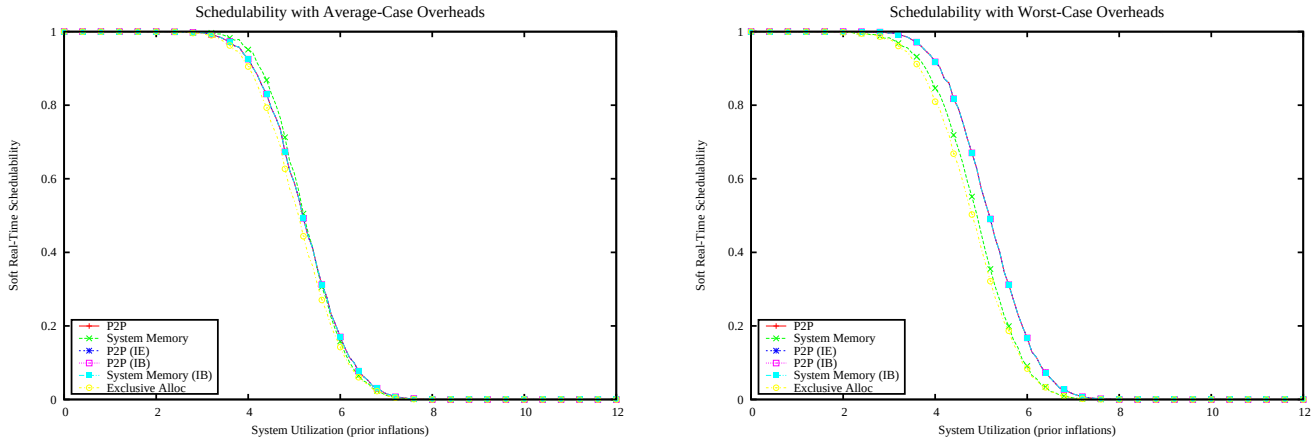

Figure 3573: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

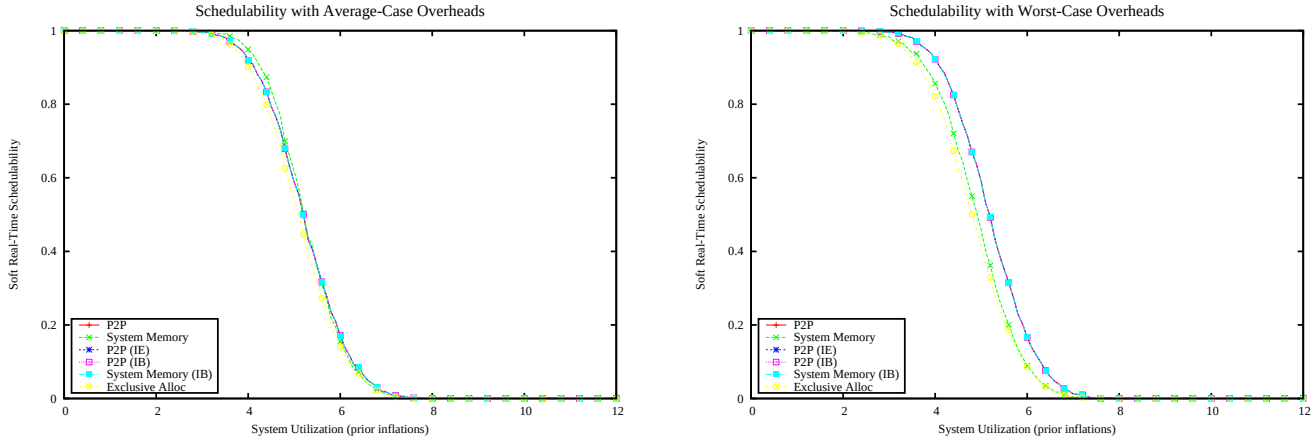

Figure 3574: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

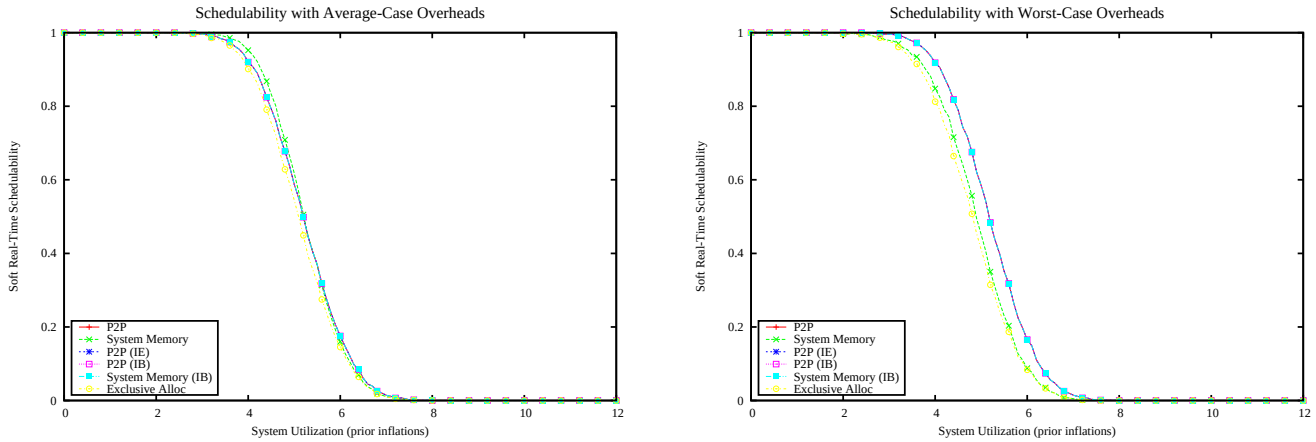

Figure 3575: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

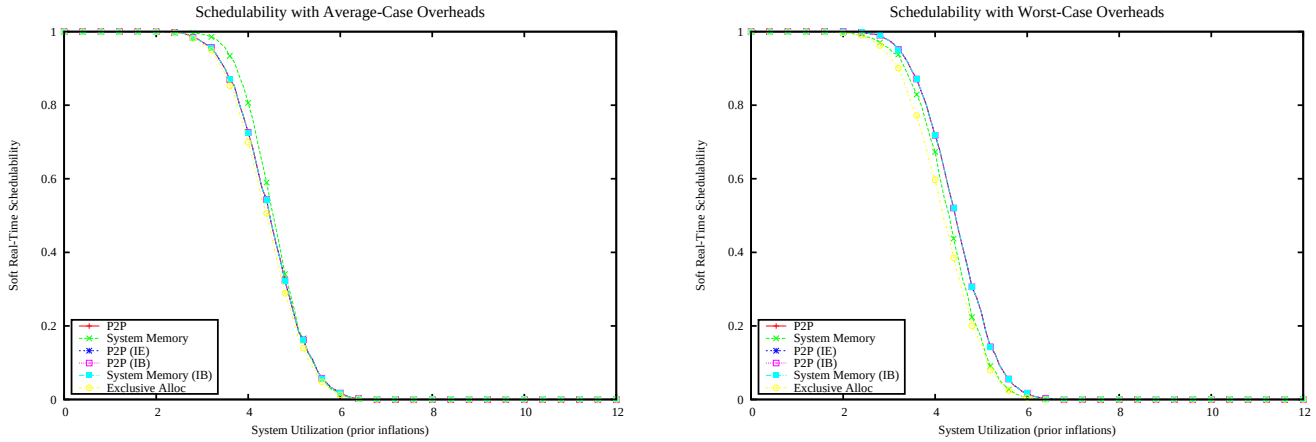

Figure 3576: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

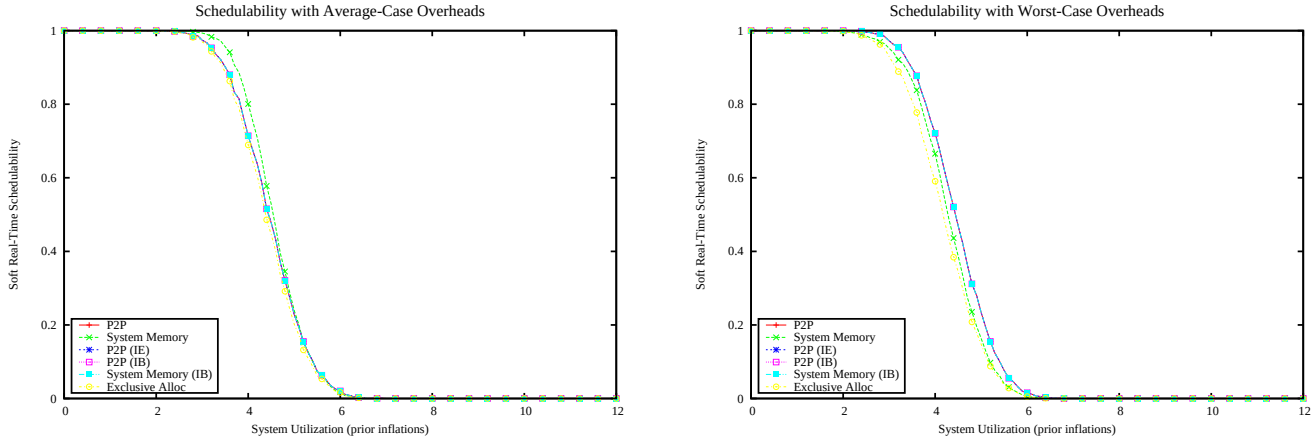

Figure 3577: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

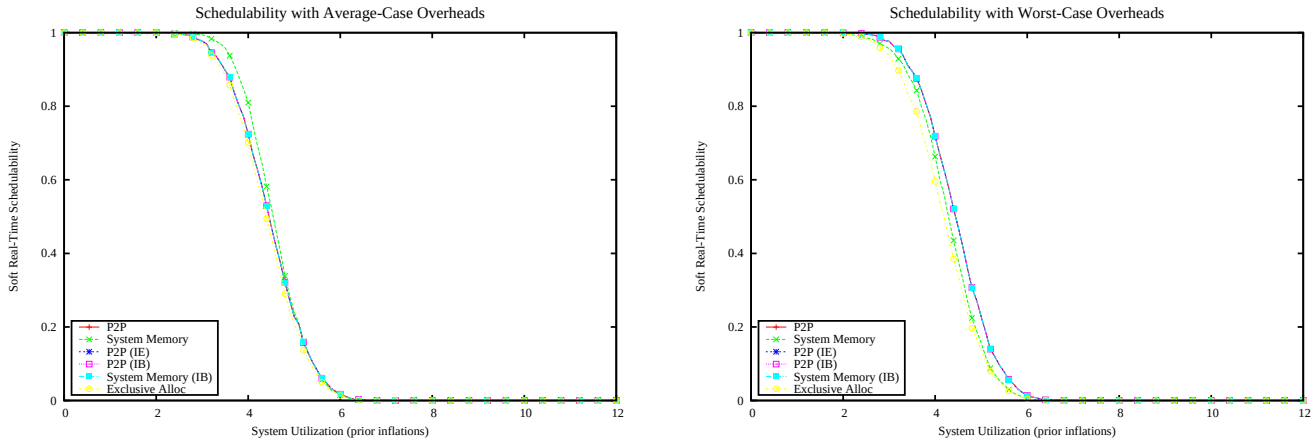

Figure 3578: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

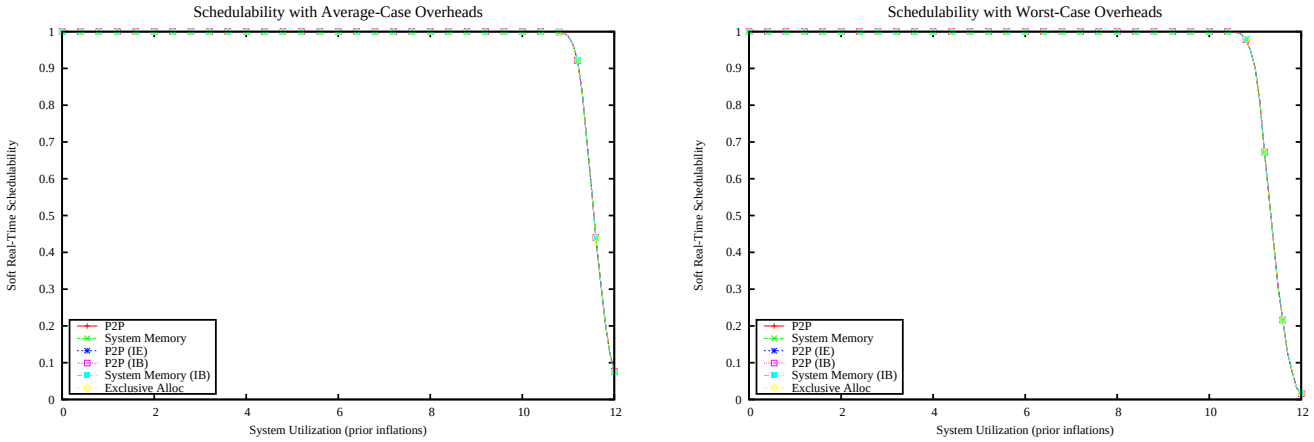

Figure 3579: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

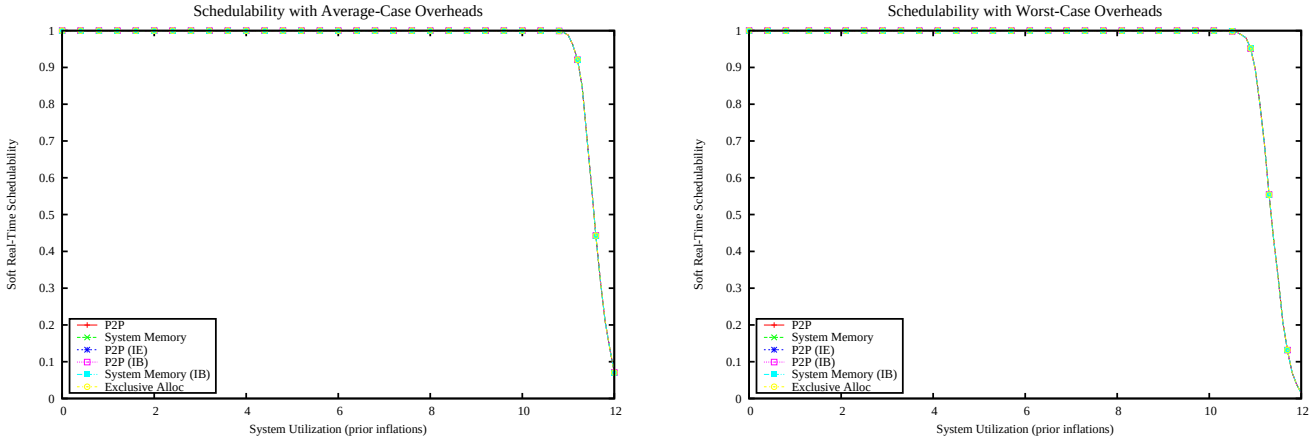

Figure 3580: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

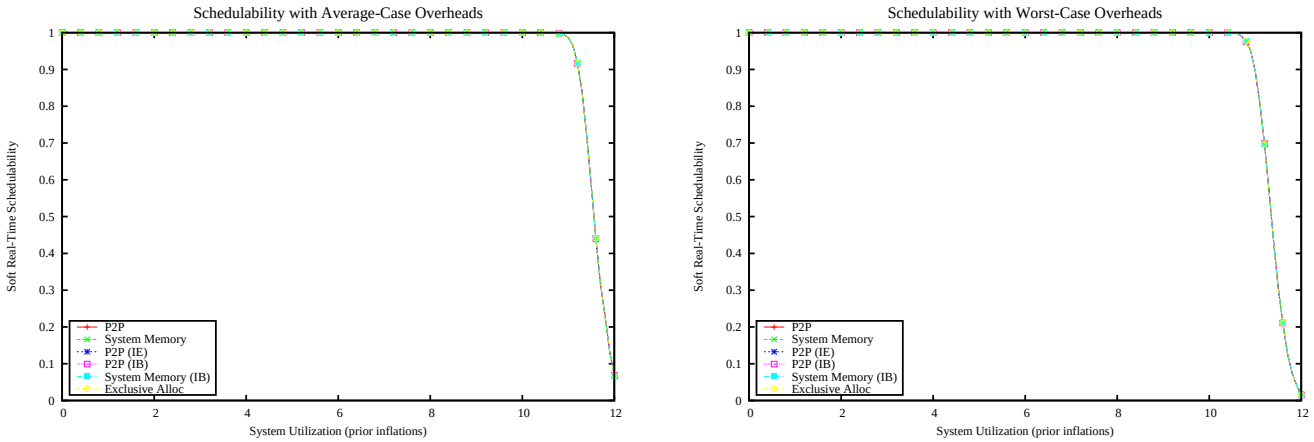

Figure 3581: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

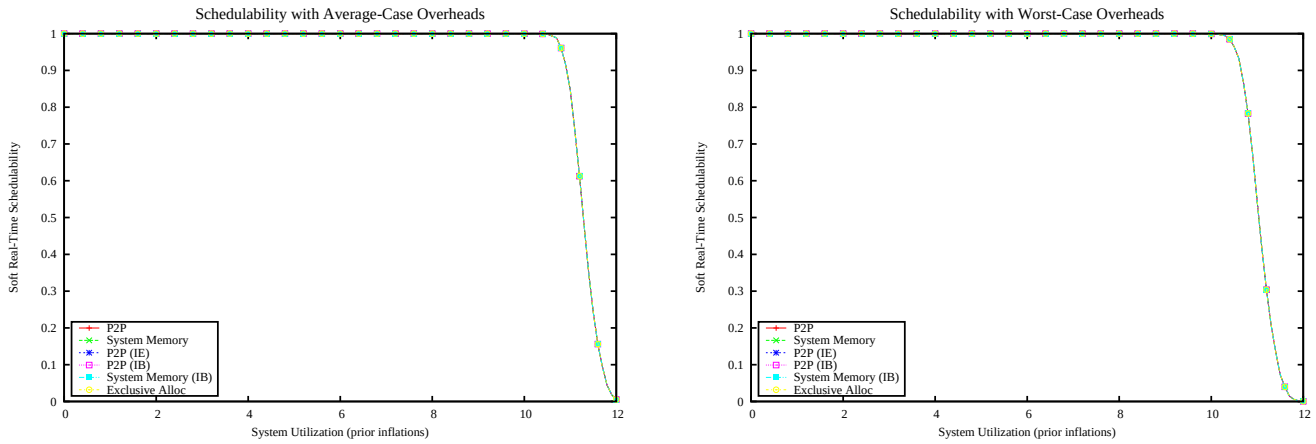

Figure 3582: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

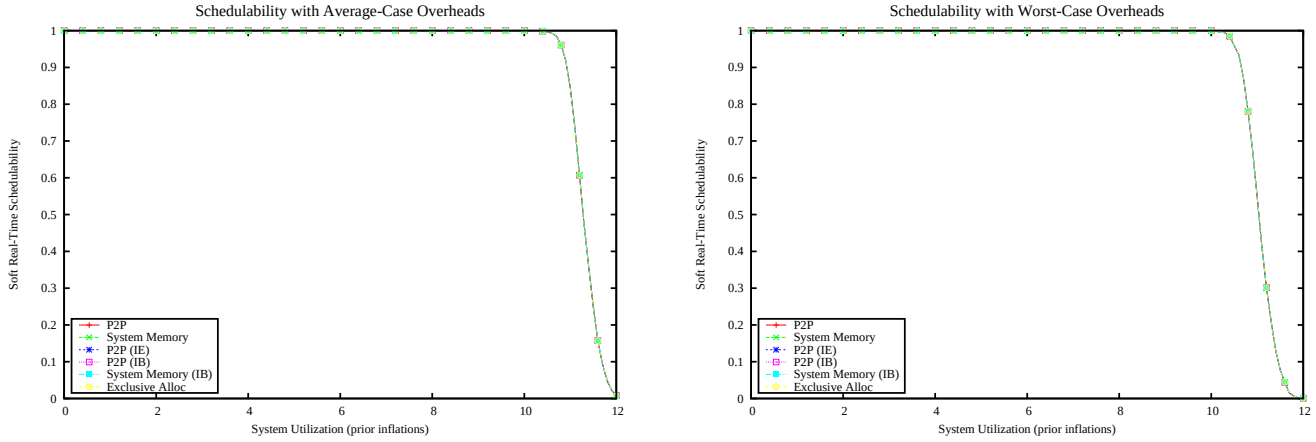

Figure 3583: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

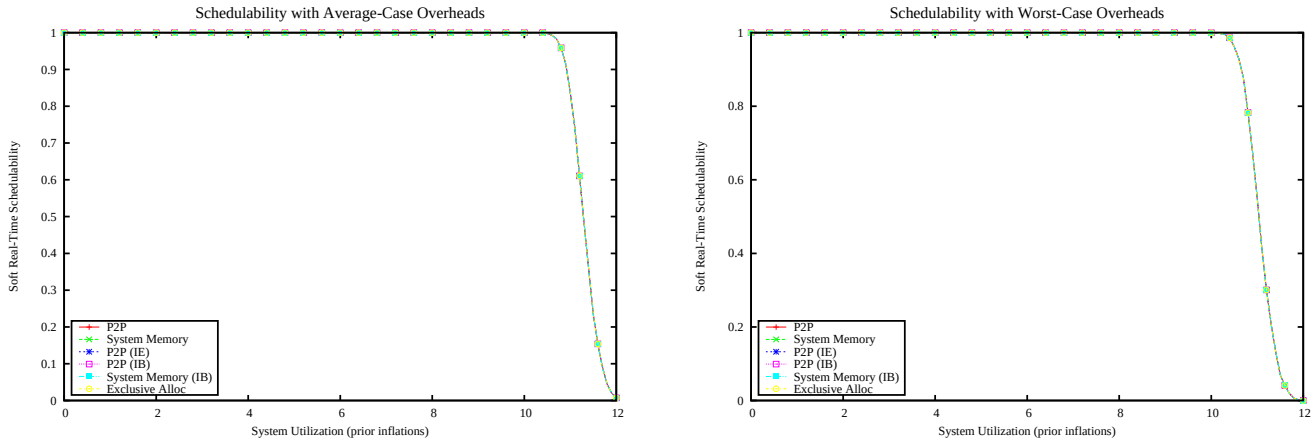

Figure 3584: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

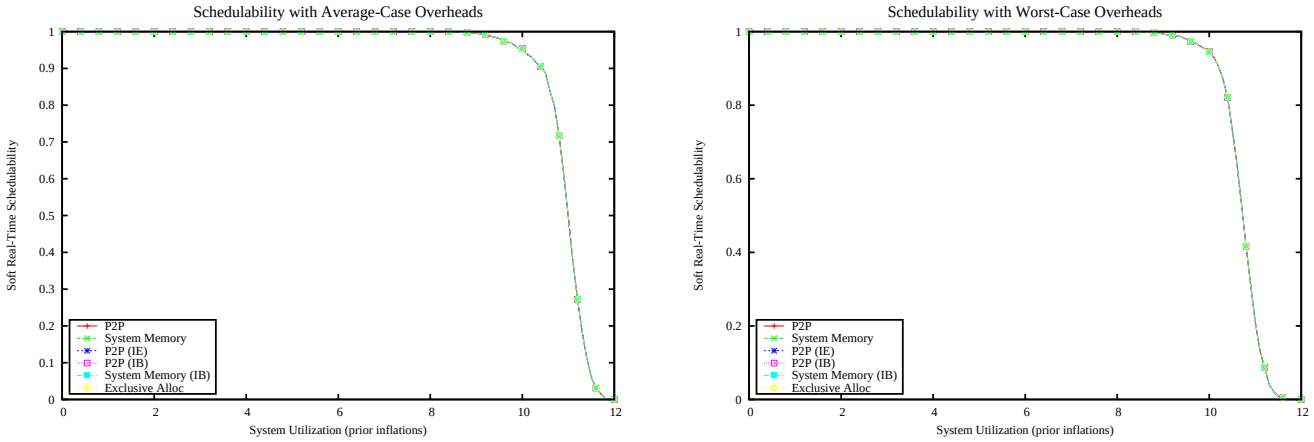

Figure 3585: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

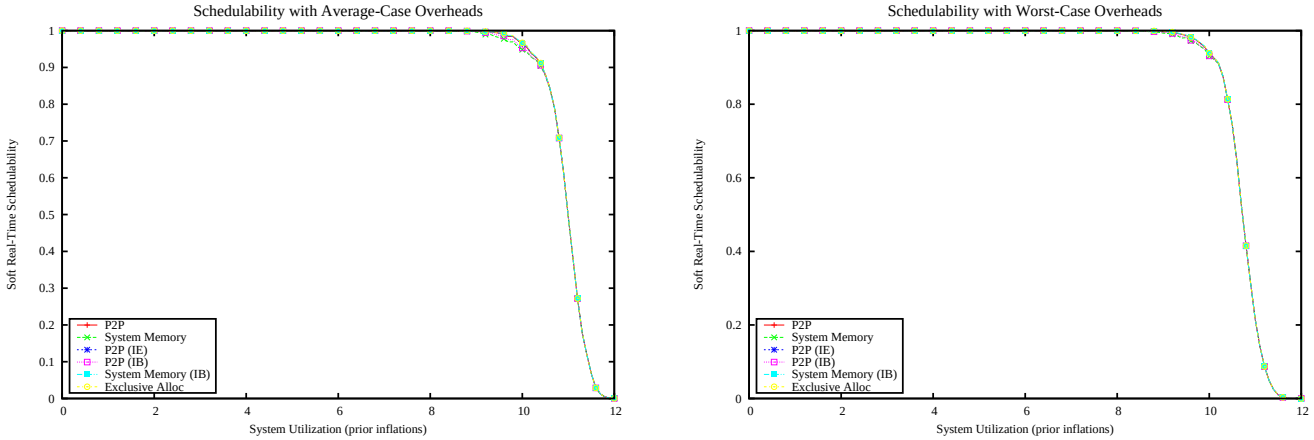

Figure 3586: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

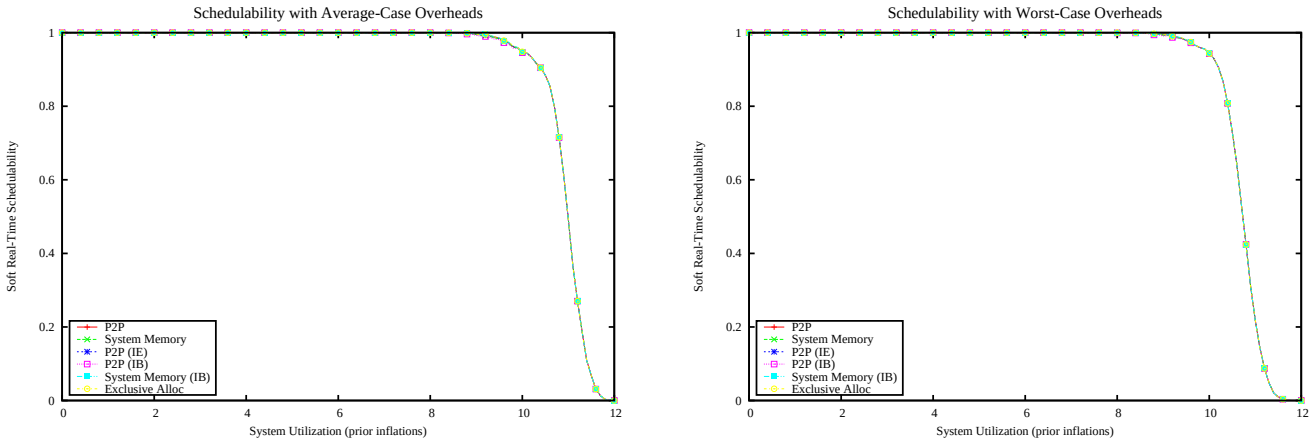

Figure 3587: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

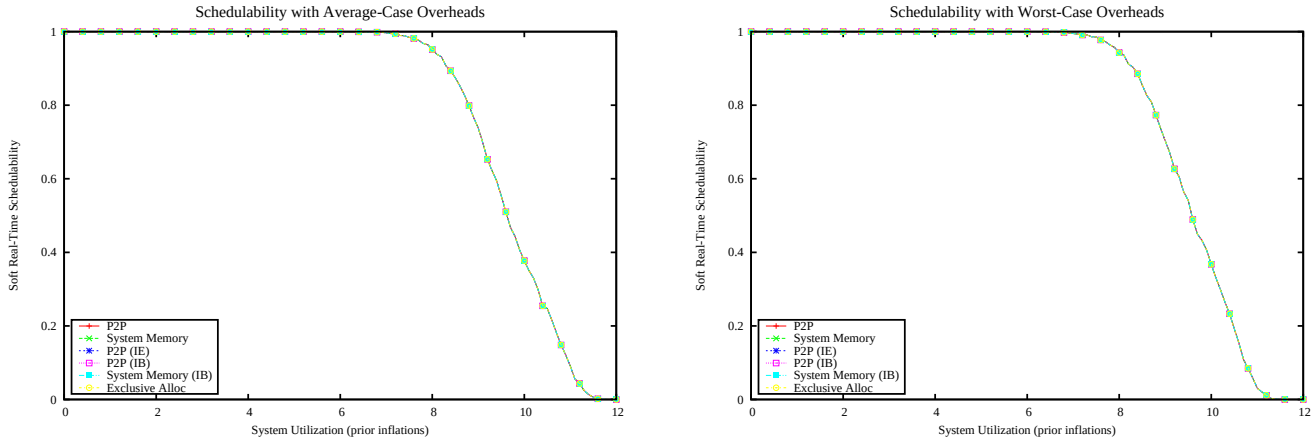

Figure 3588: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

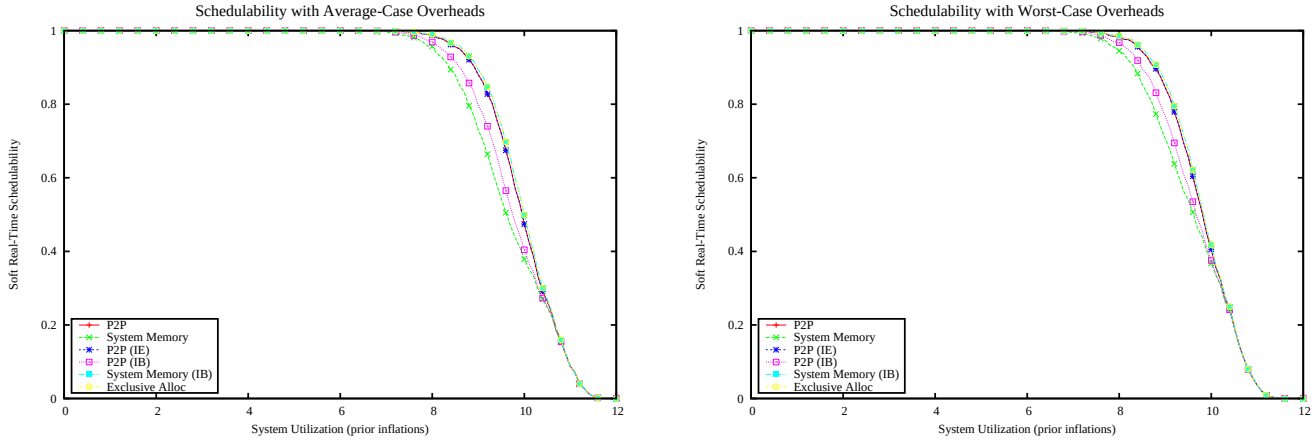

Figure 3589: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

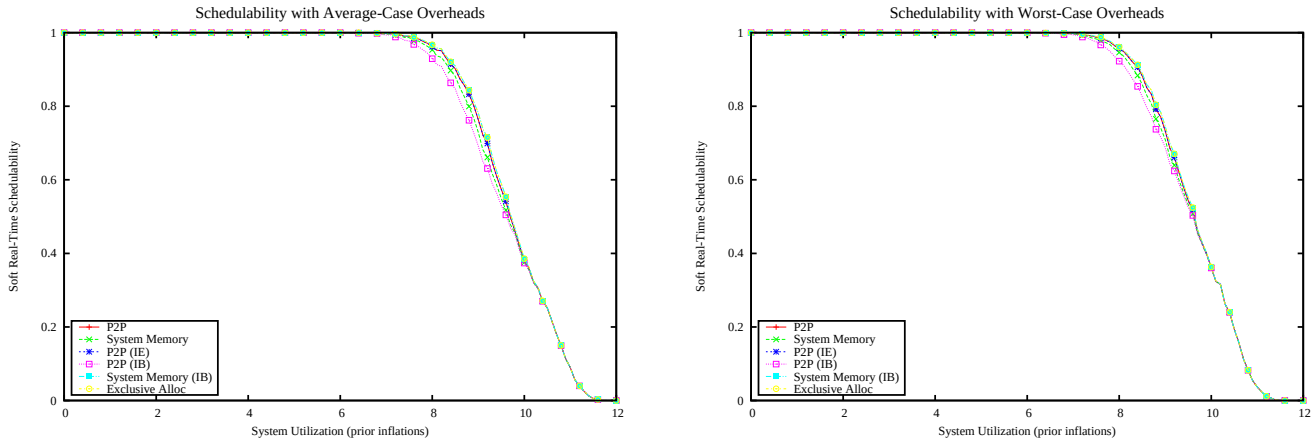

Figure 3590: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

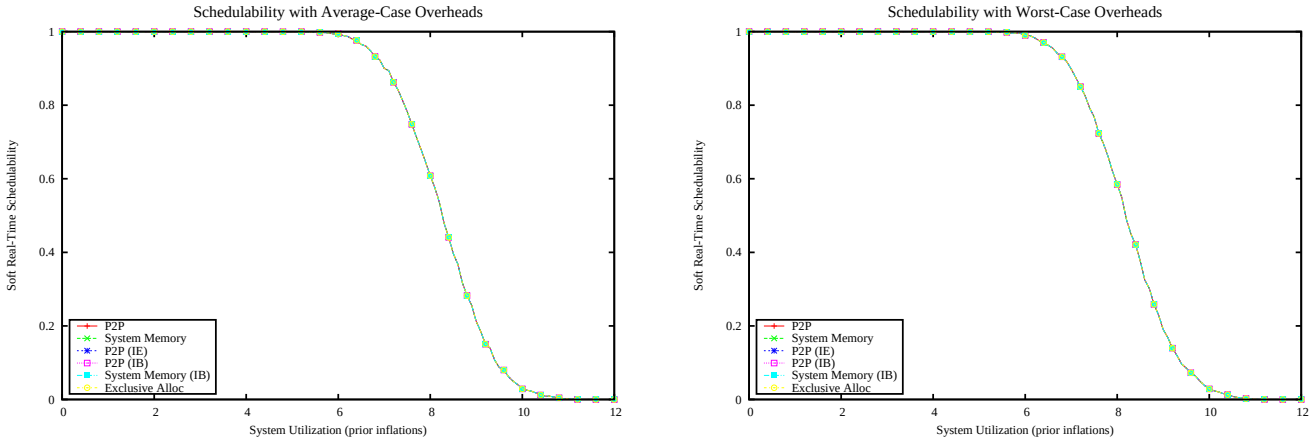

Figure 3591: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

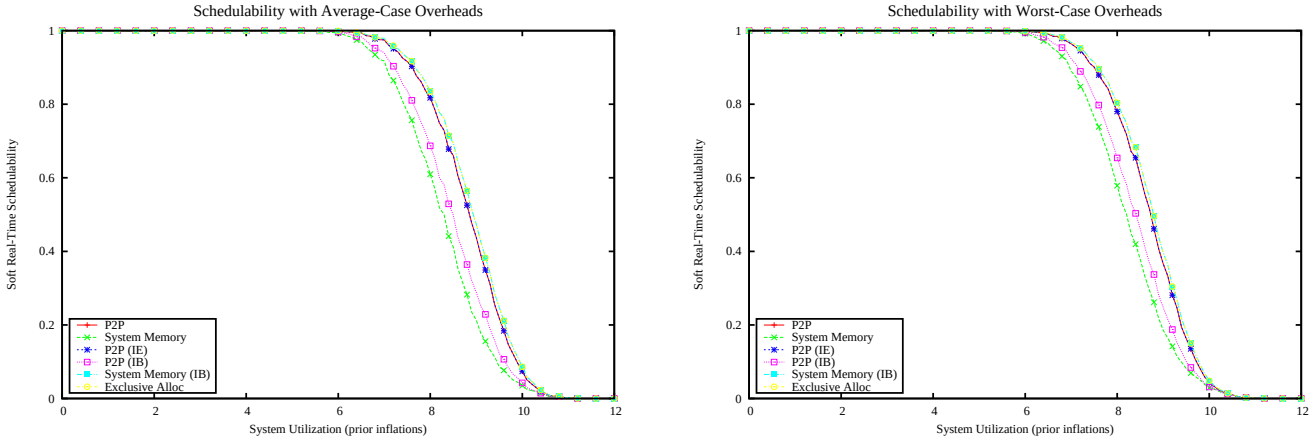

Figure 3592: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

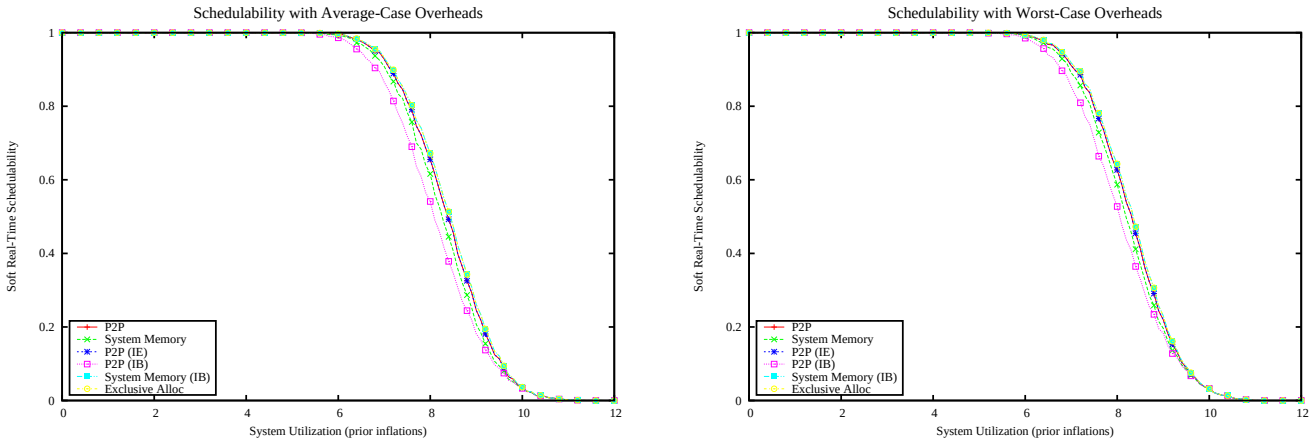

Figure 3593: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

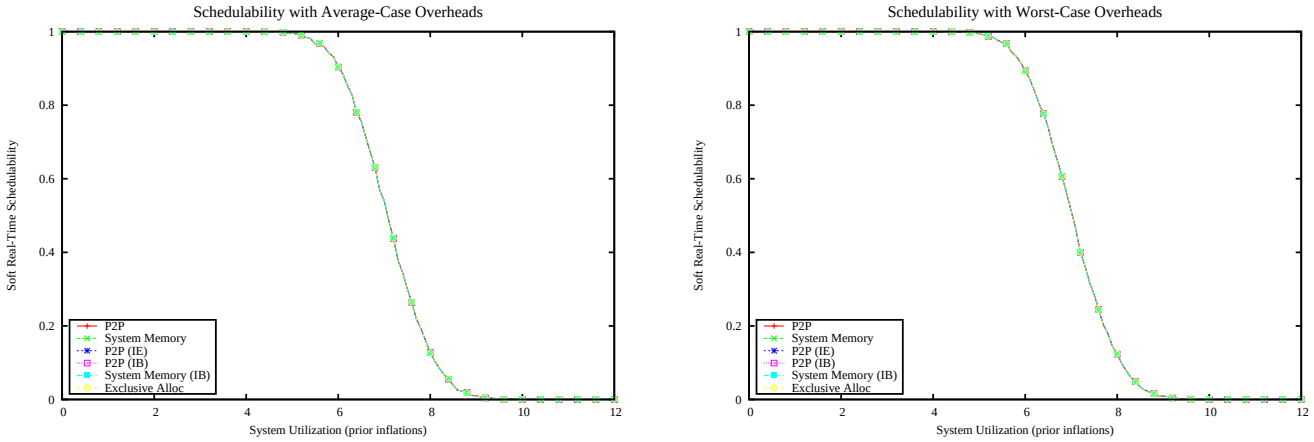

Figure 3594: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

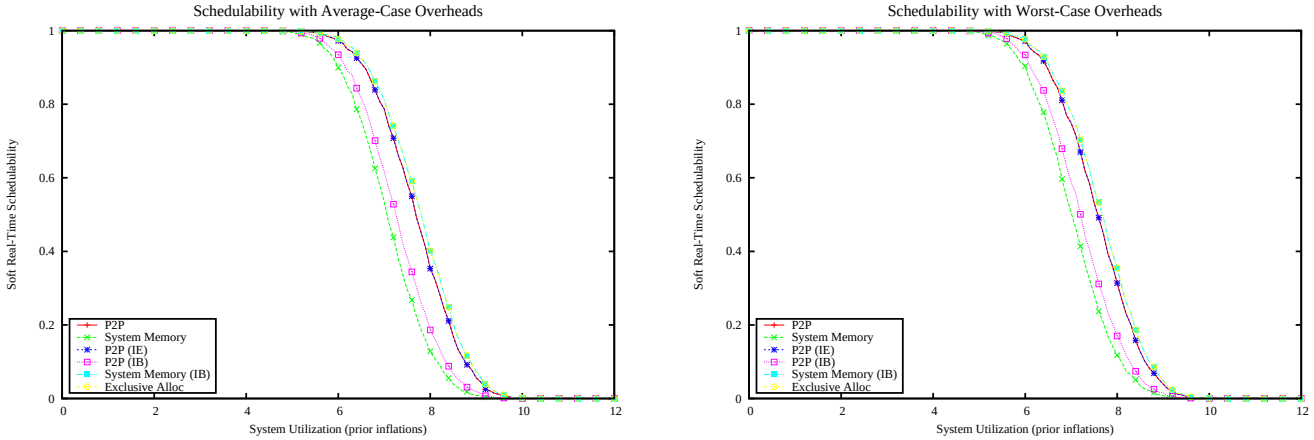

Figure 3595: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

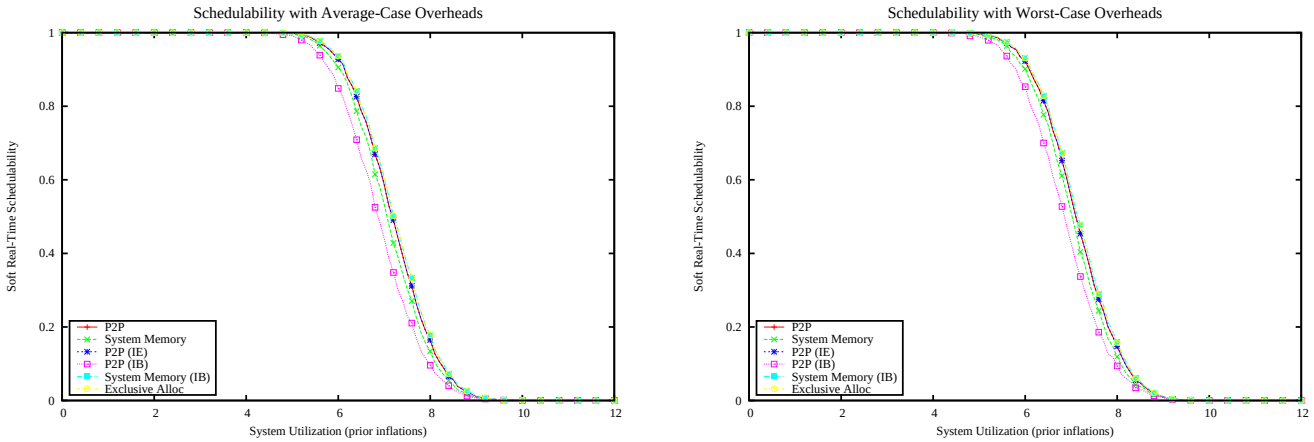

Figure 3596: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

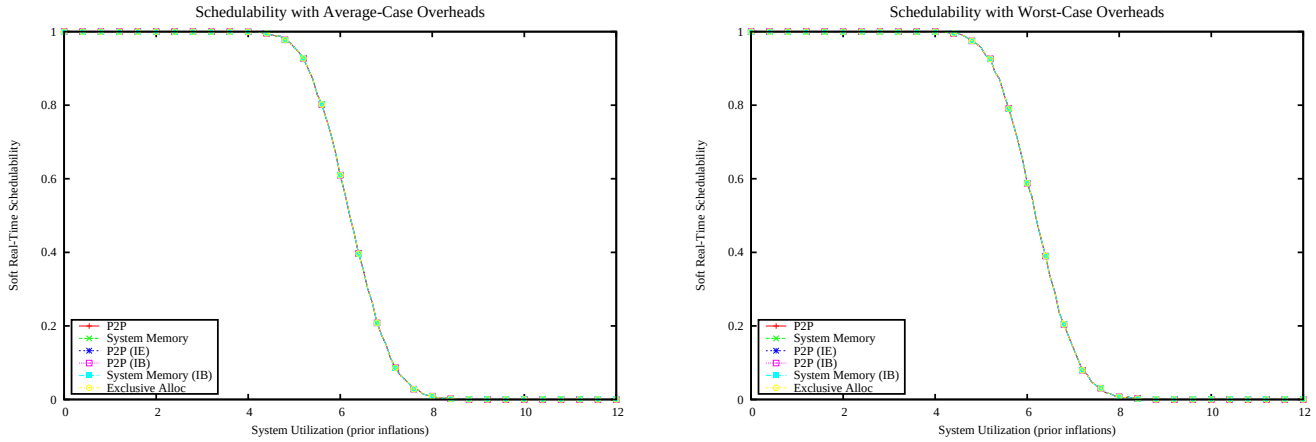

Figure 3597: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

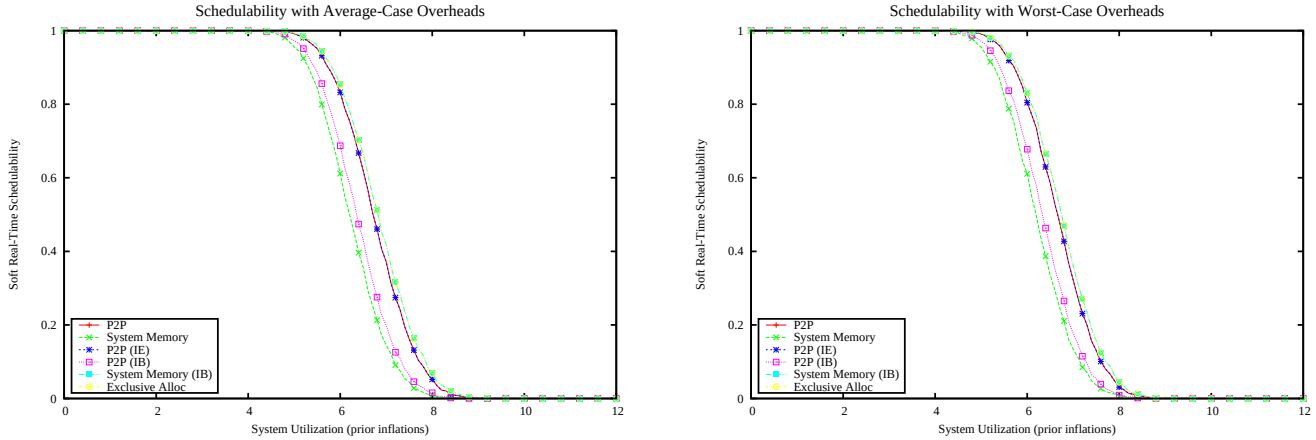

Figure 3598: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

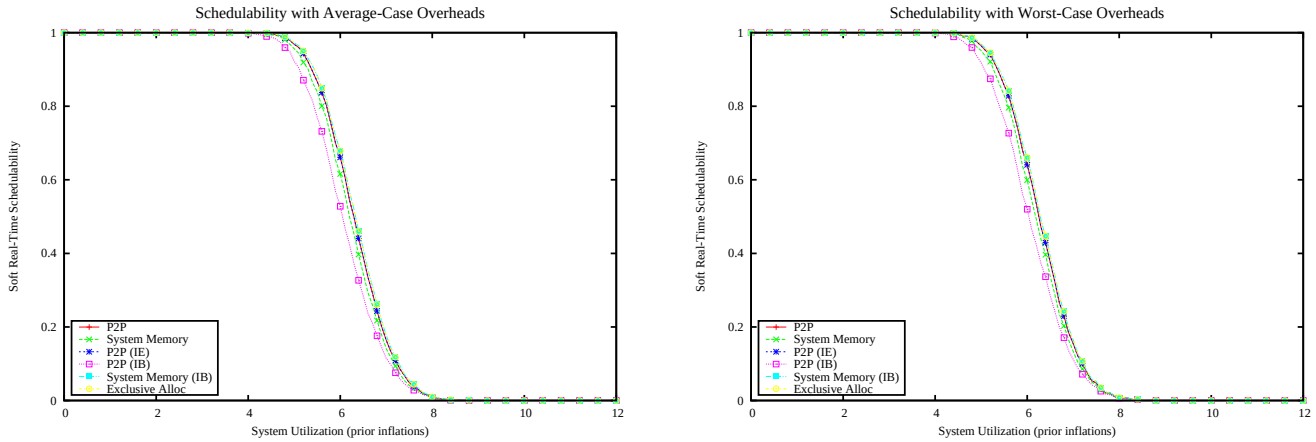

Figure 3599: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

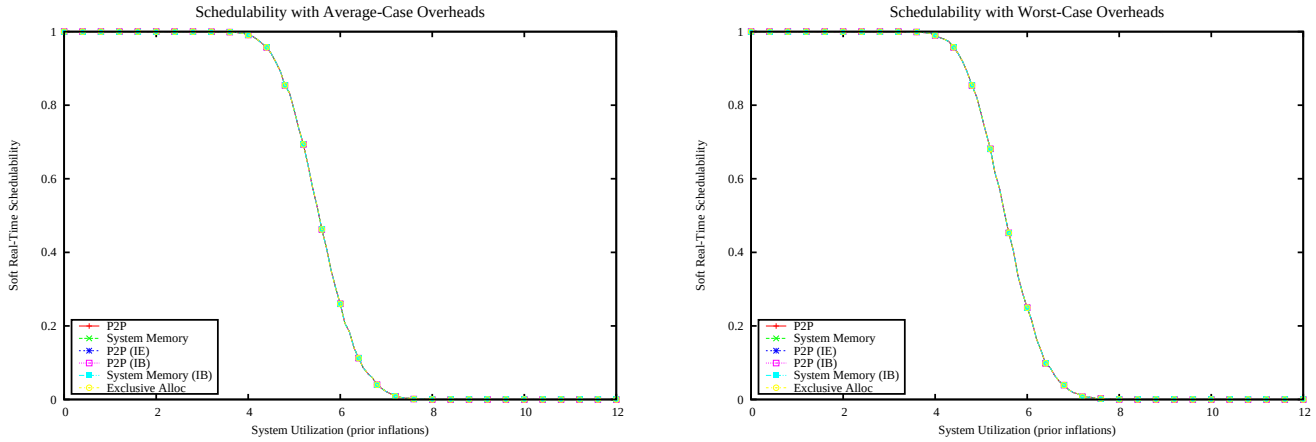

Figure 3600: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

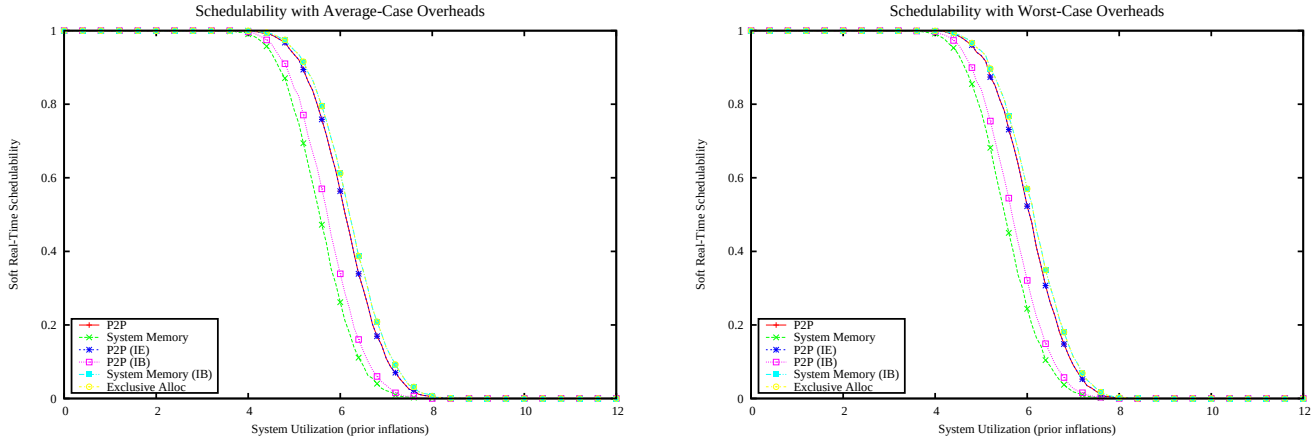

Figure 3601: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

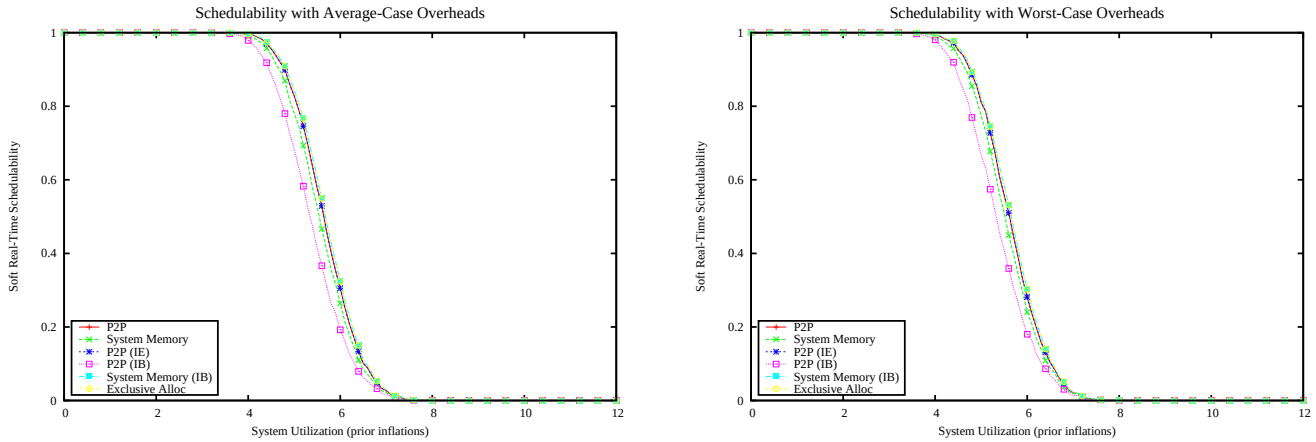

Figure 3602: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

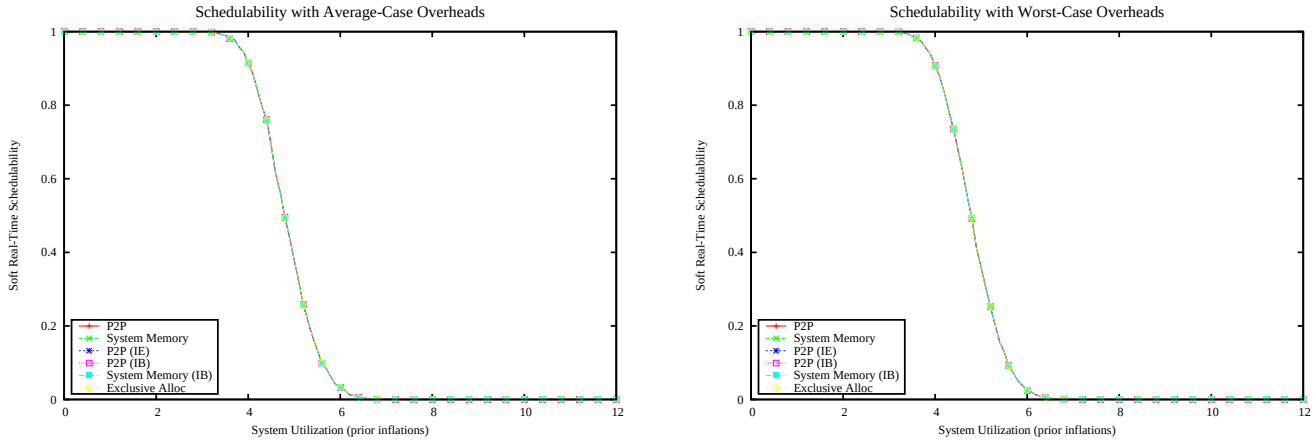

Figure 3603: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

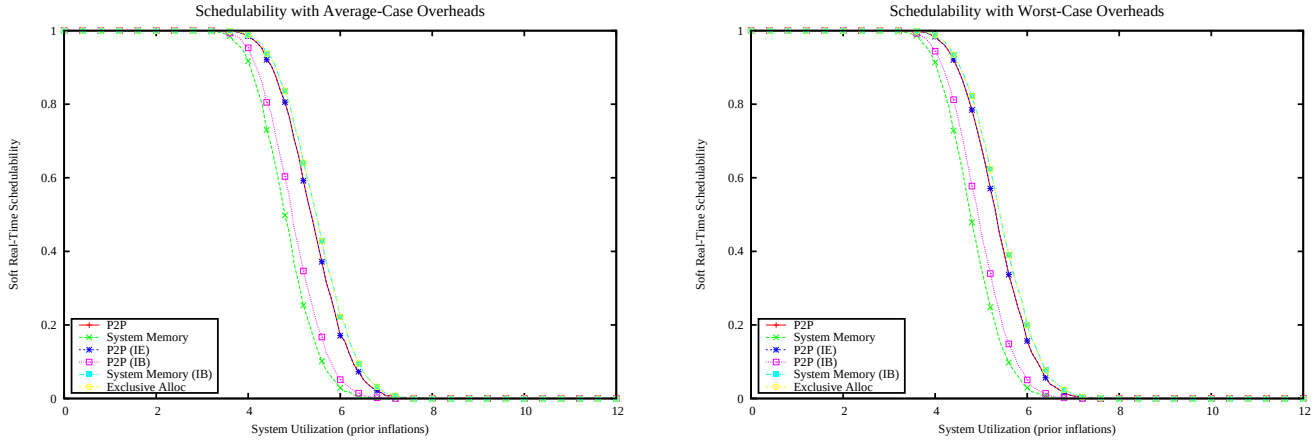

Figure 3604: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

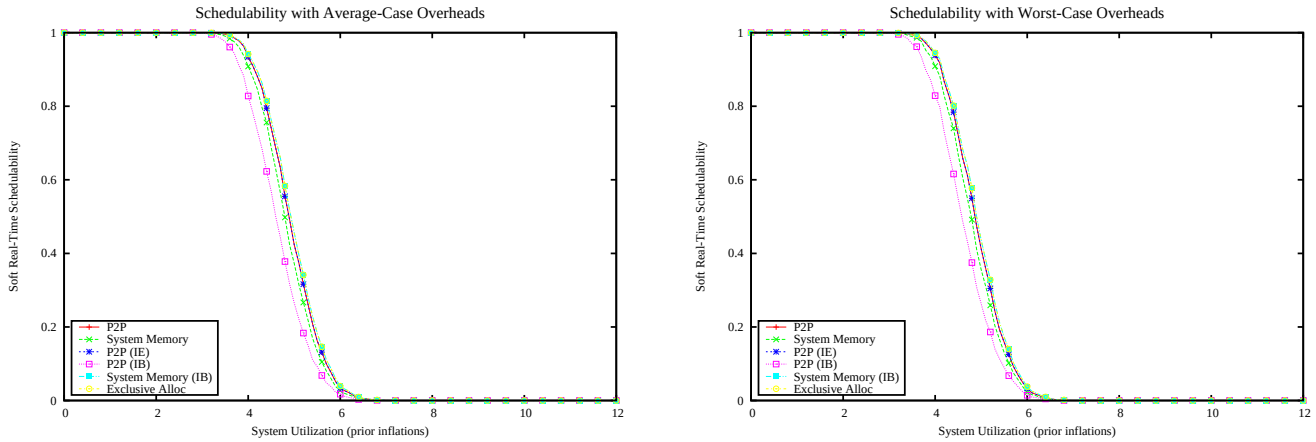

Figure 3605: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

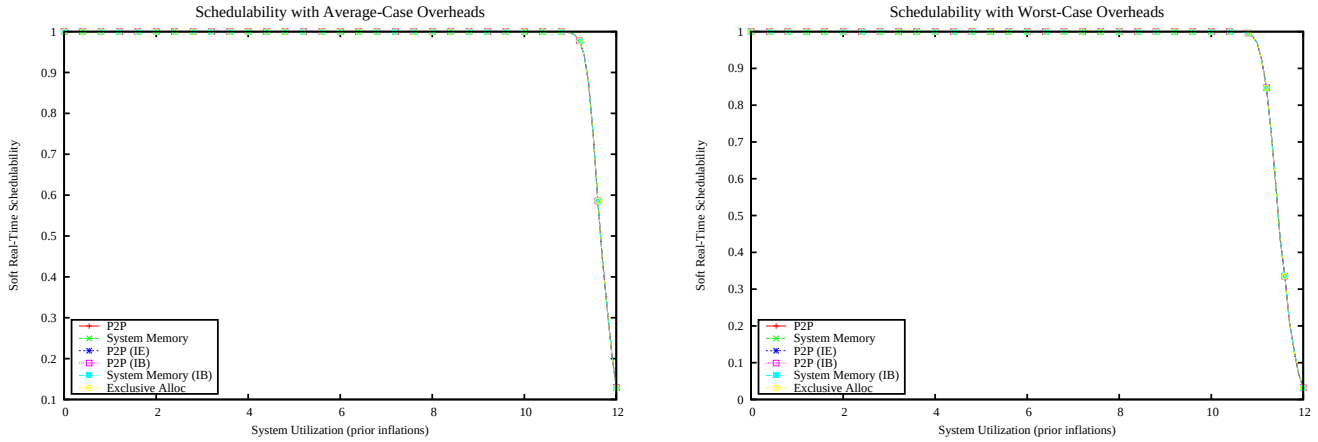

Figure 3606: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

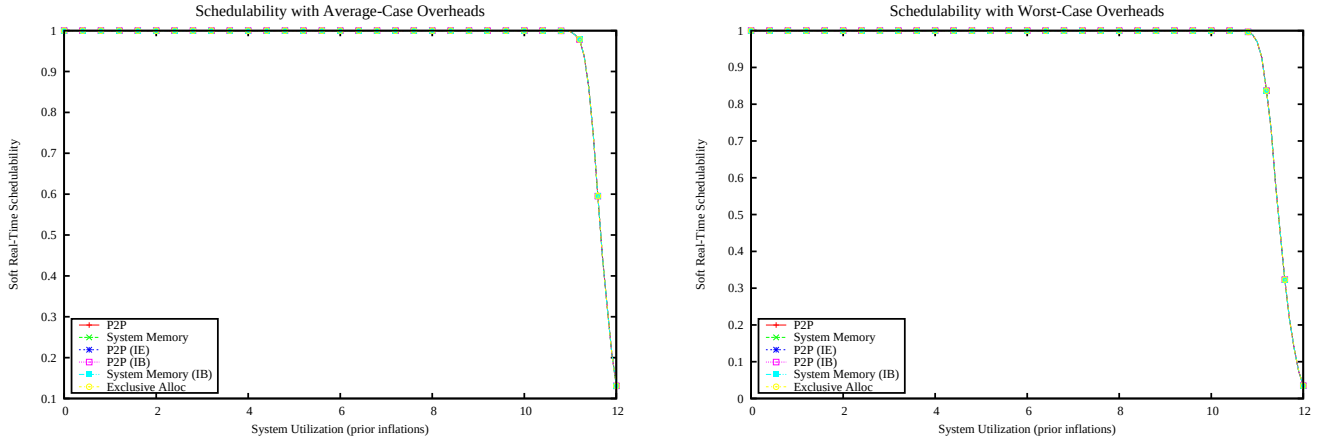

Figure 3607: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

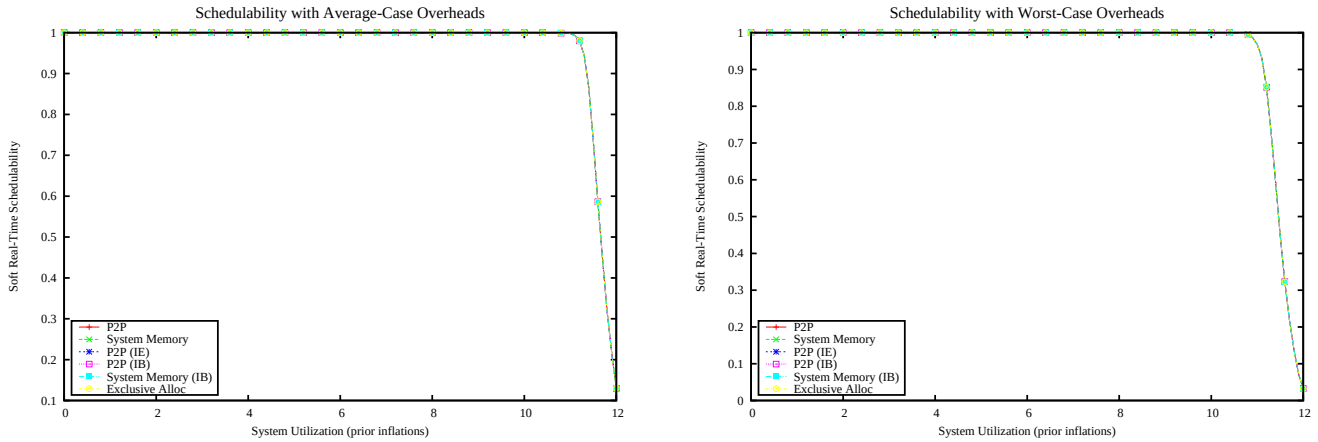

Figure 3608: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

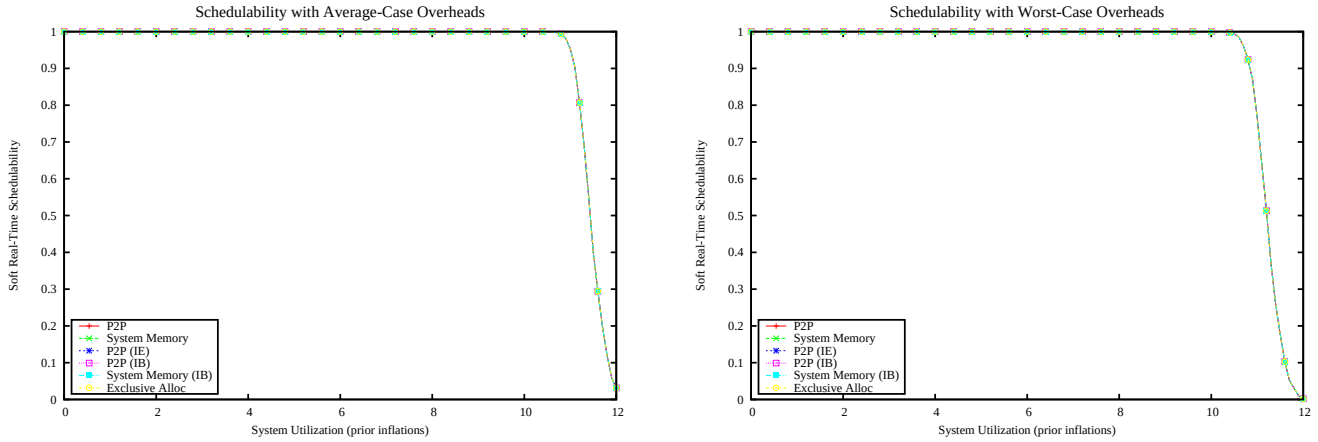

Figure 3609: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

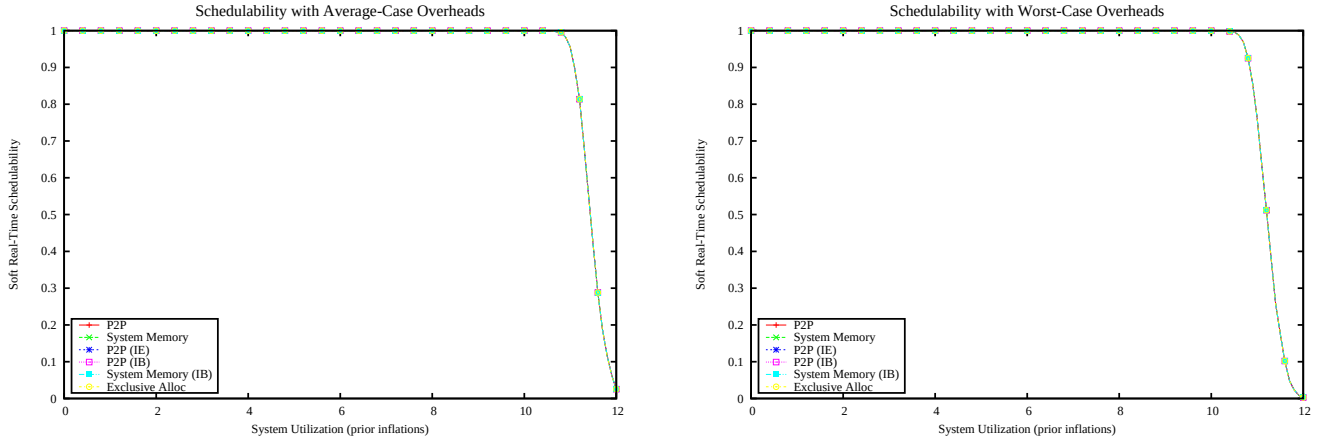

Figure 3610: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

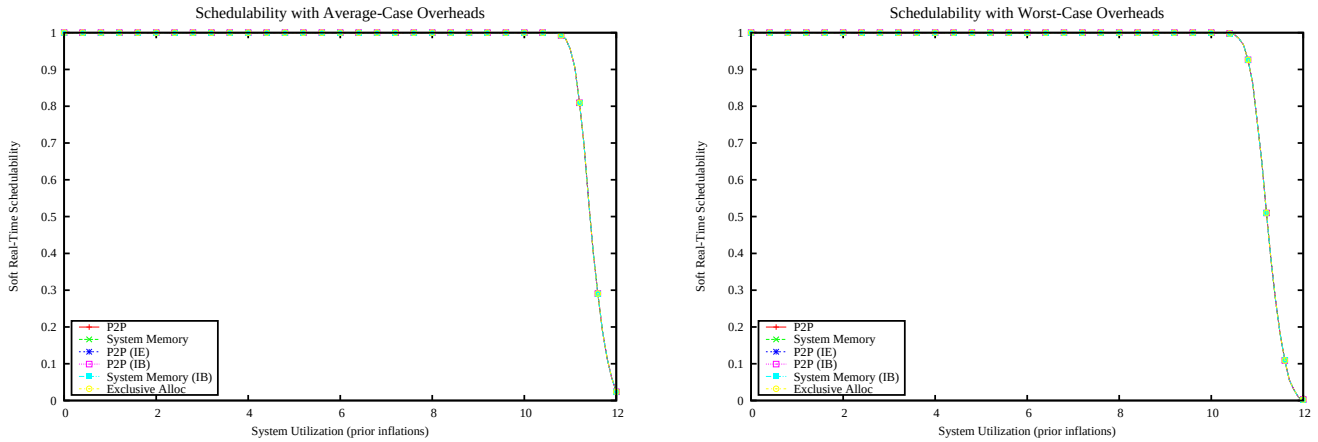

Figure 3611: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

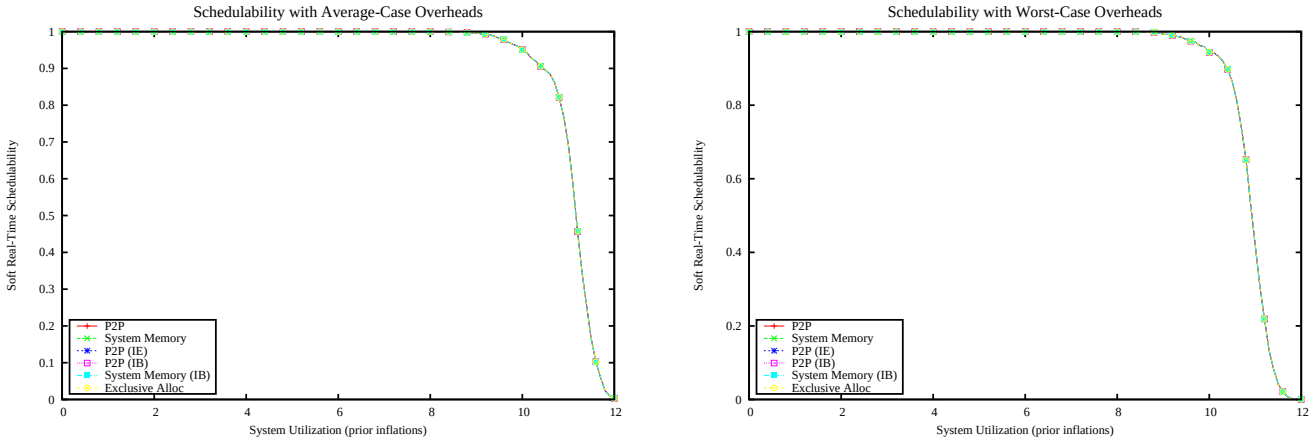

Figure 3612: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

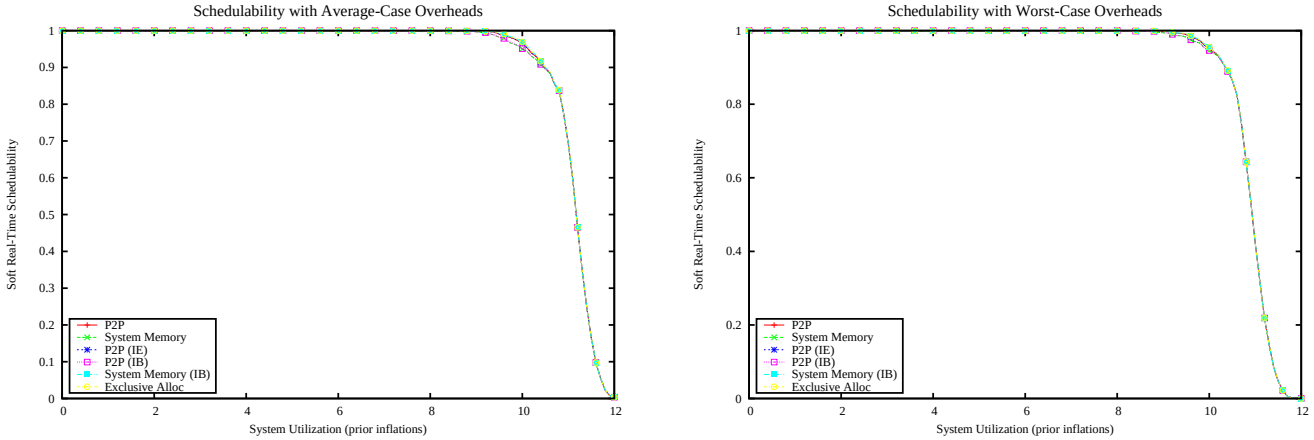

Figure 3613: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

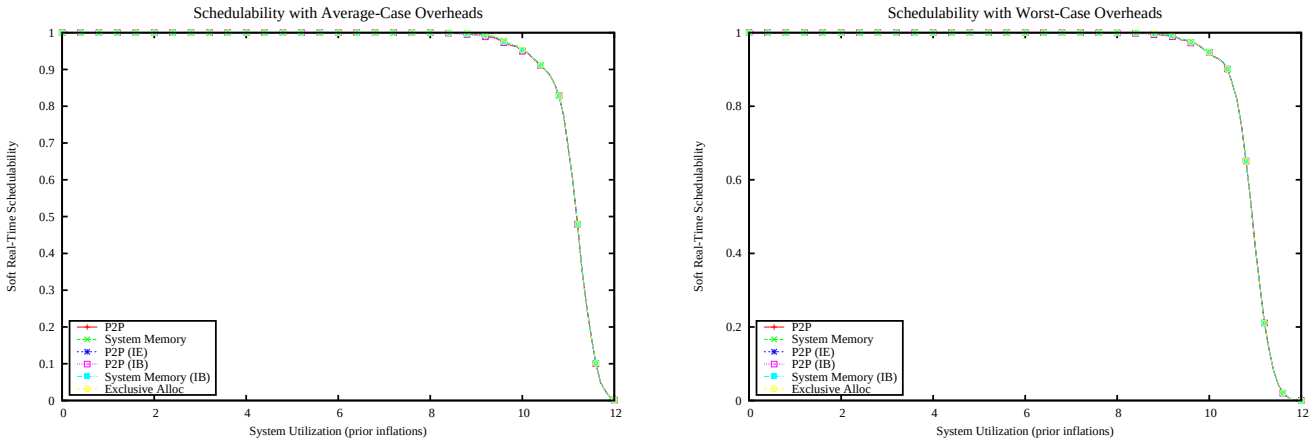

Figure 3614: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

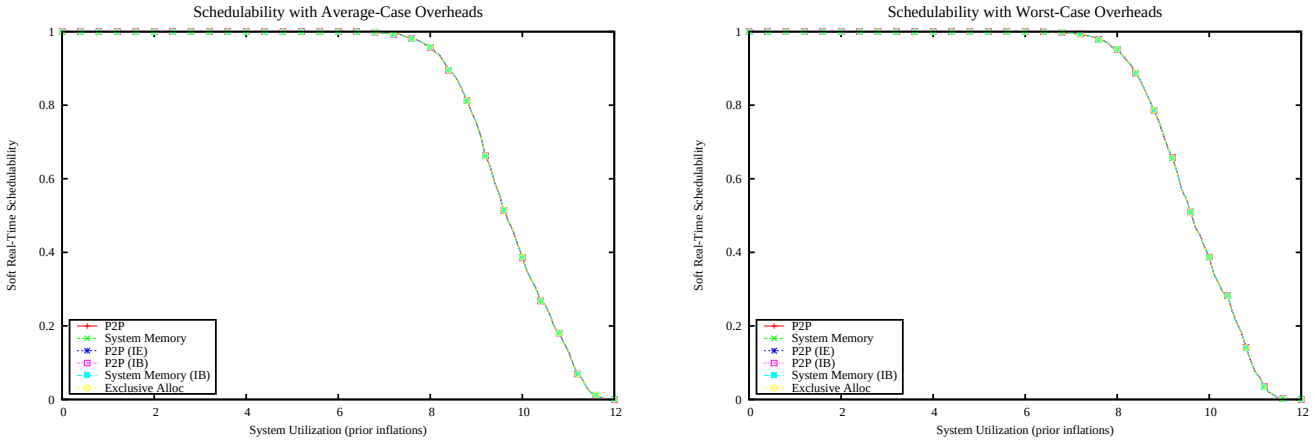

Figure 3615: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

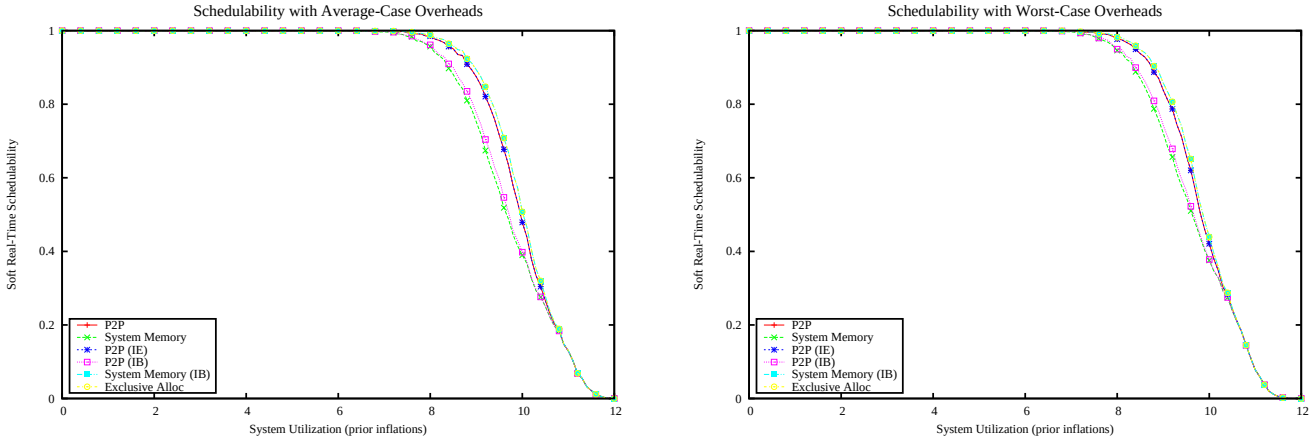

Figure 3616: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

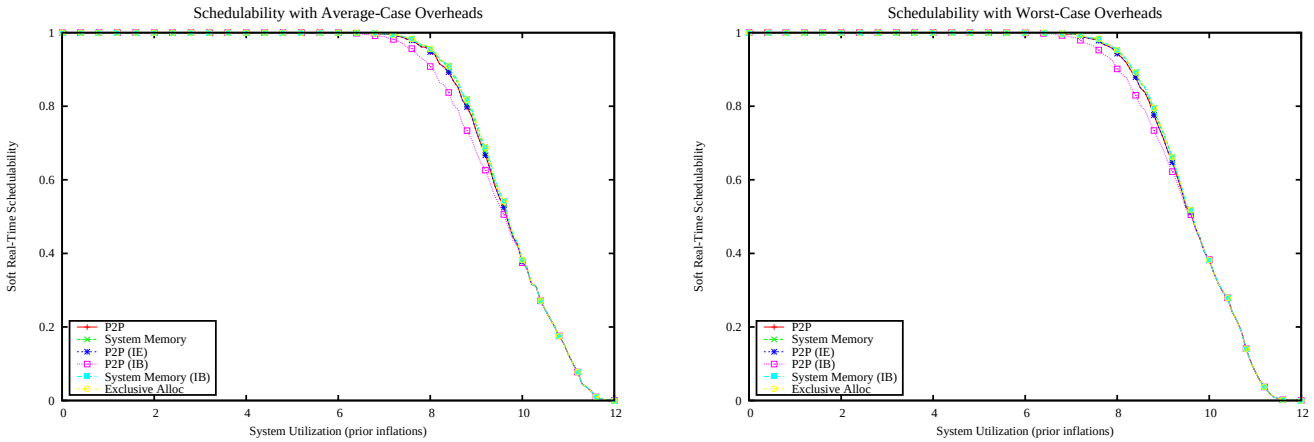

Figure 3617: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

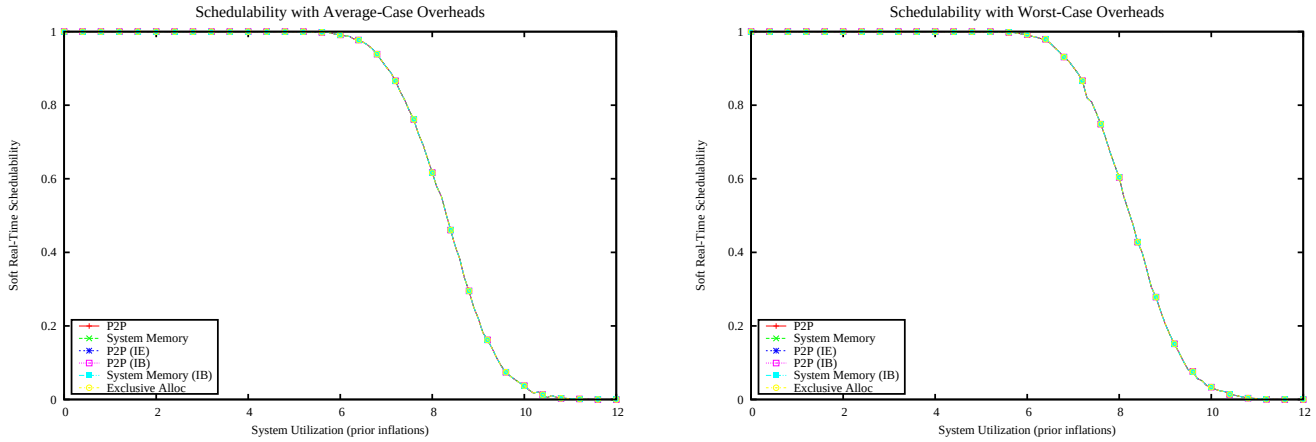

Figure 3618: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

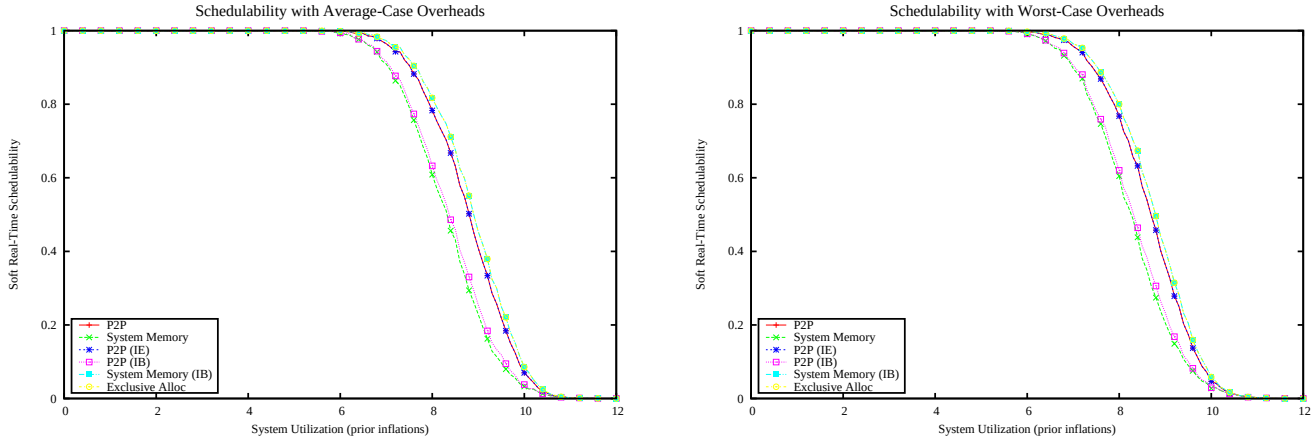

Figure 3619: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

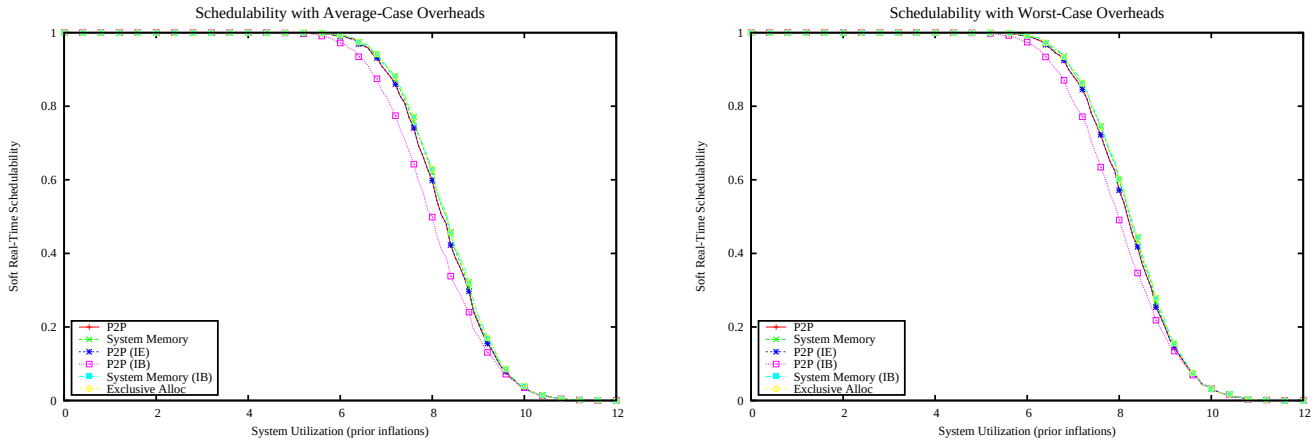

Figure 3620: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

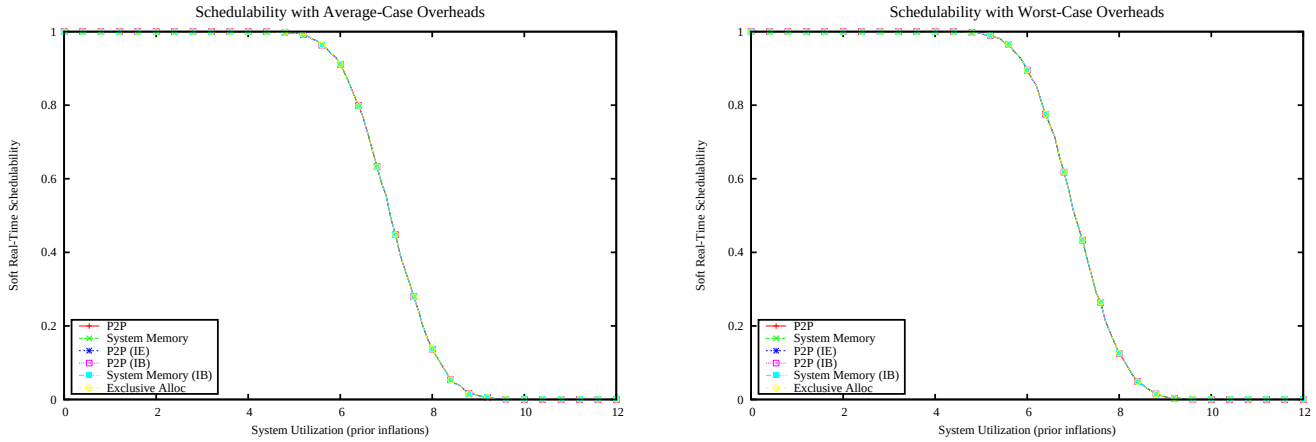

Figure 3621: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

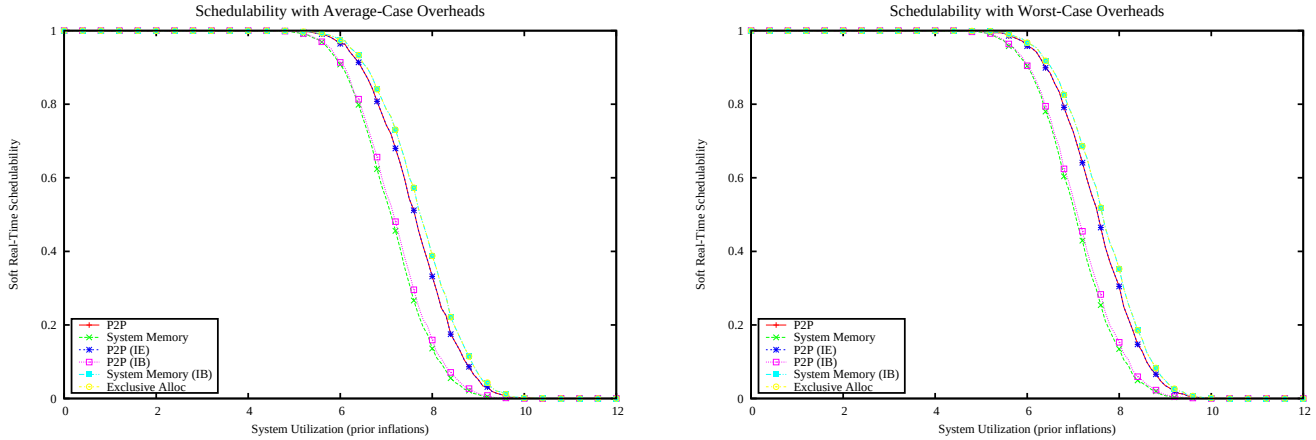

Figure 3622: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

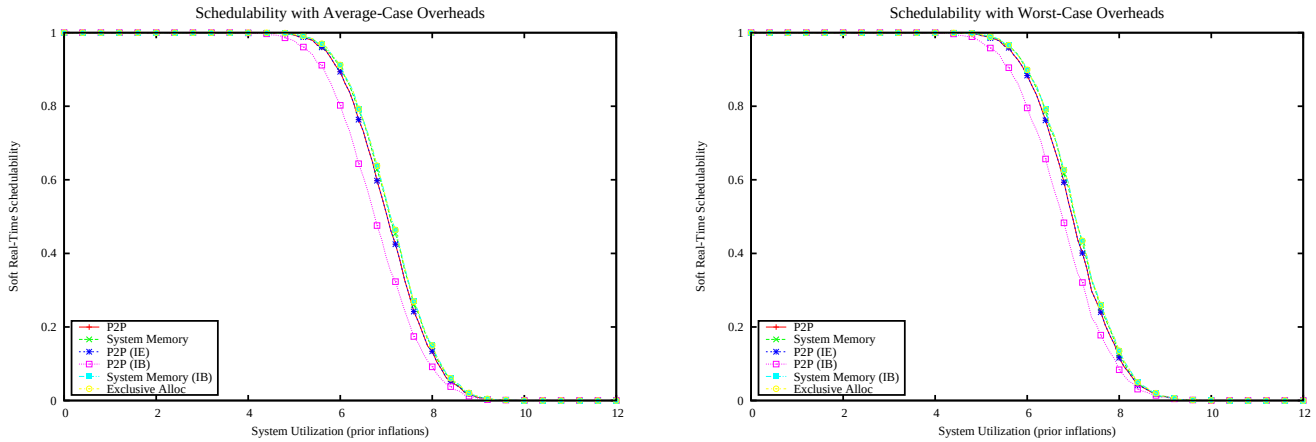

Figure 3623: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

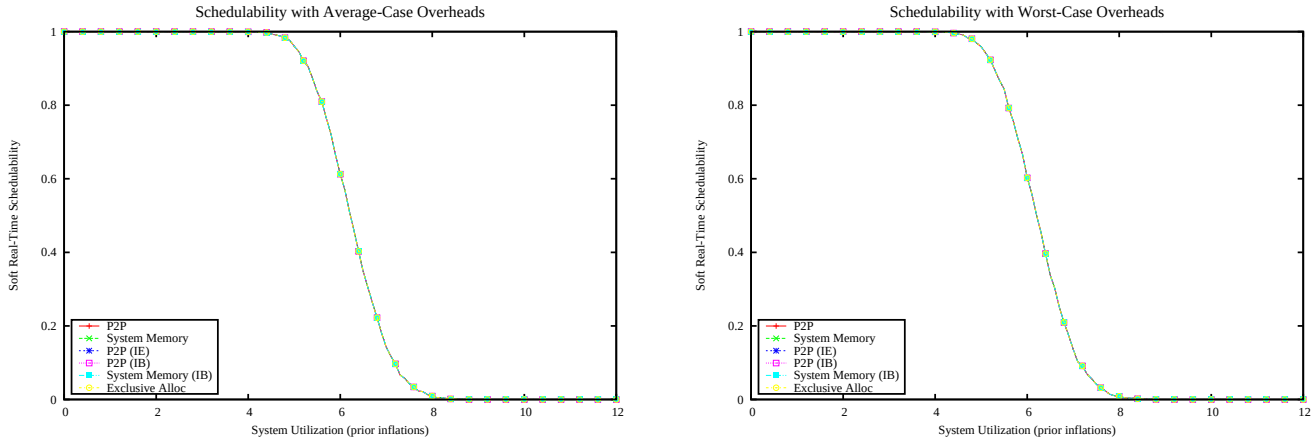

Figure 3624: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

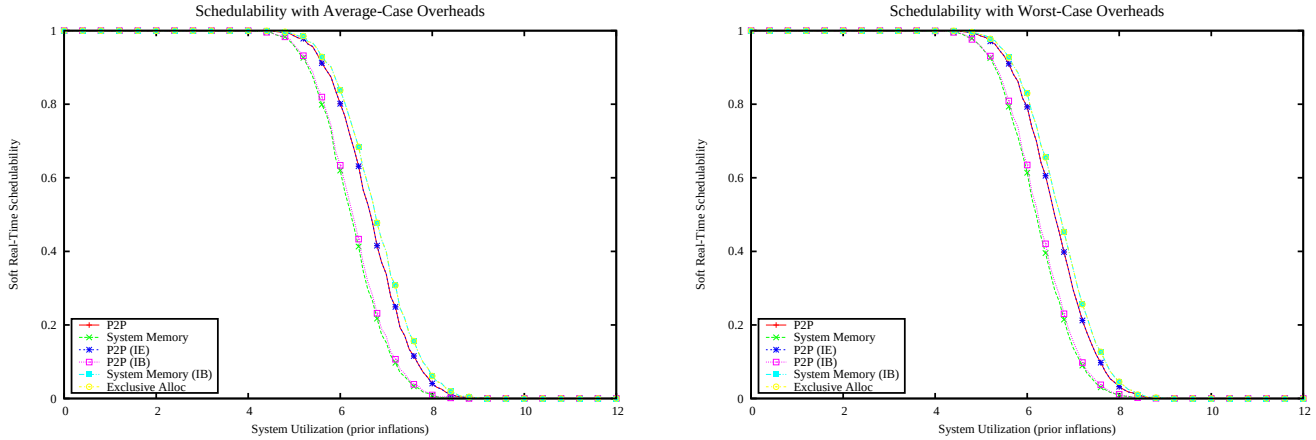

Figure 3625: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

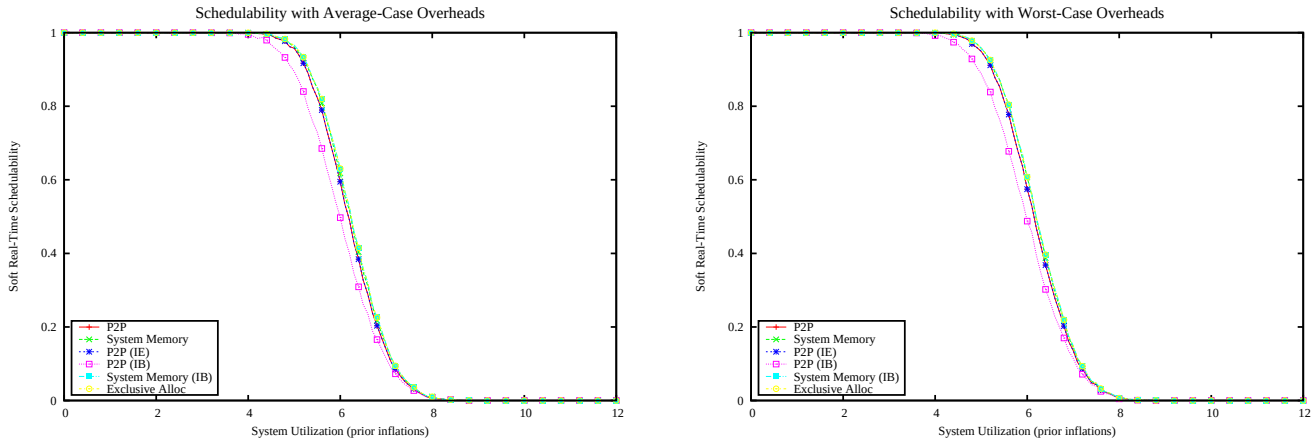

Figure 3626: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

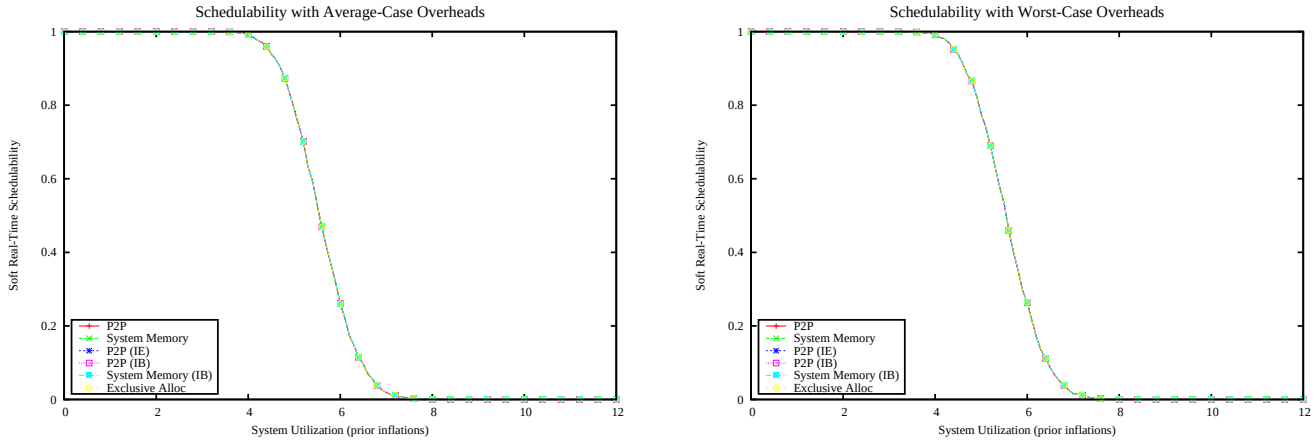

Figure 3627: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

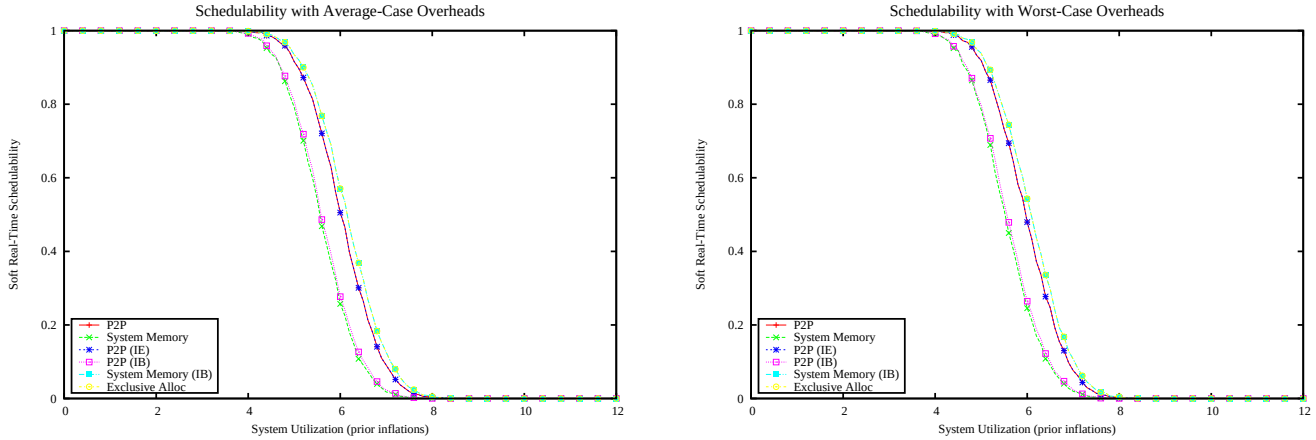

Figure 3628: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

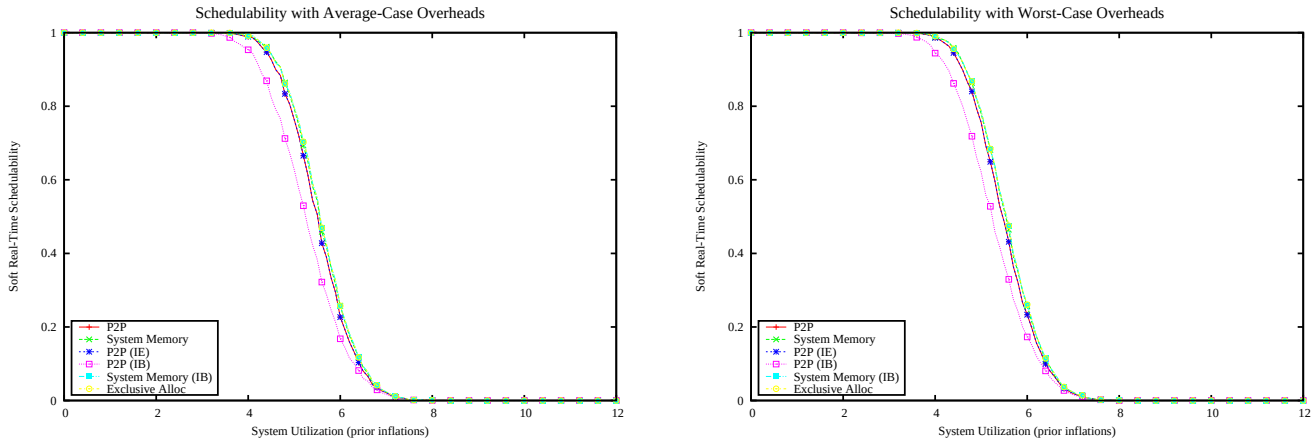

Figure 3629: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

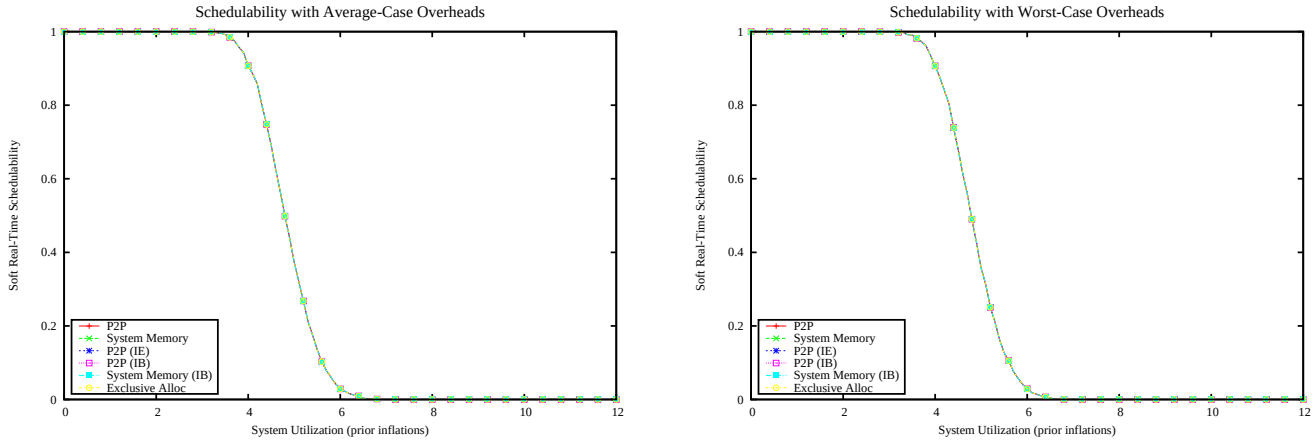

Figure 3630: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

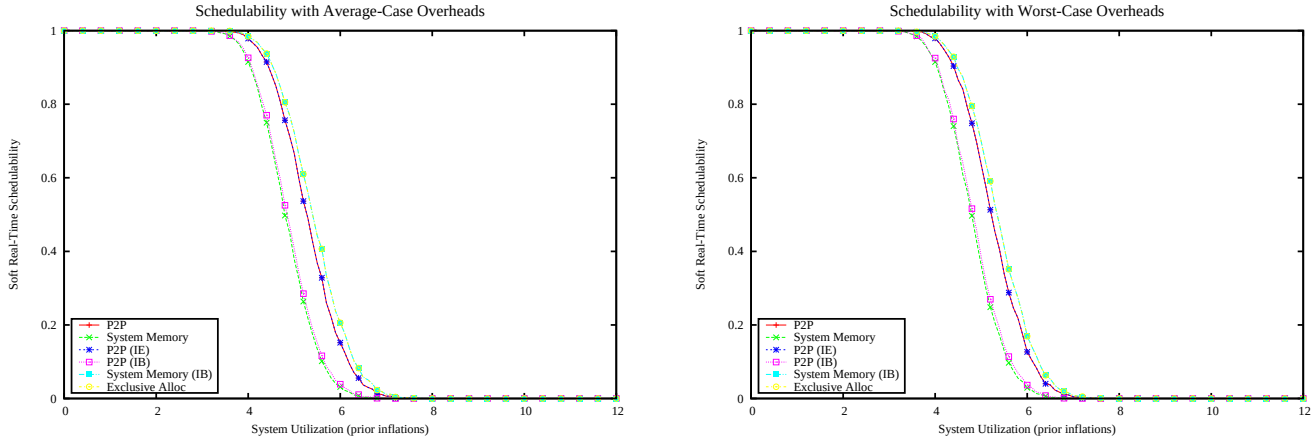

Figure 3631: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

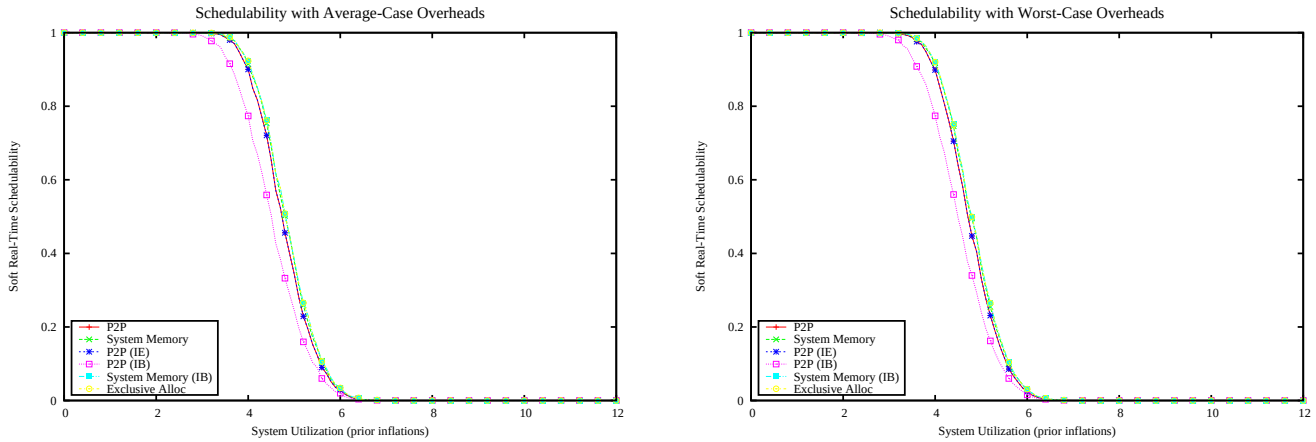

Figure 3632: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

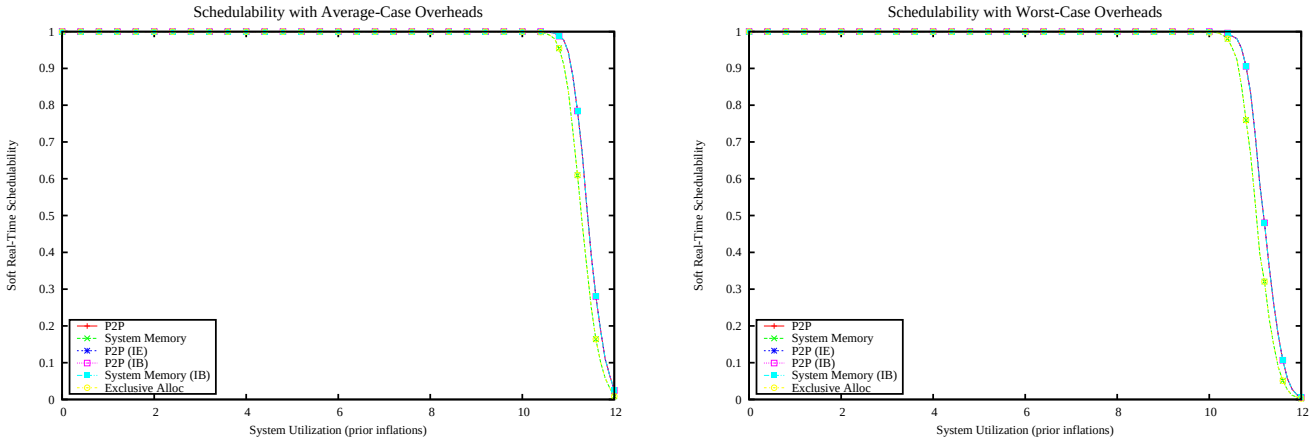

Figure 3633: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

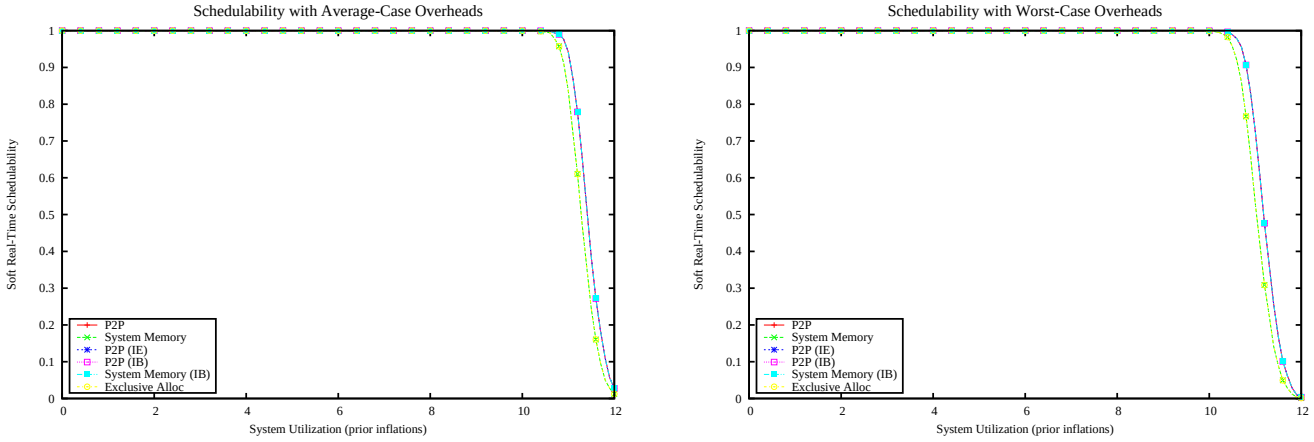

Figure 3634: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

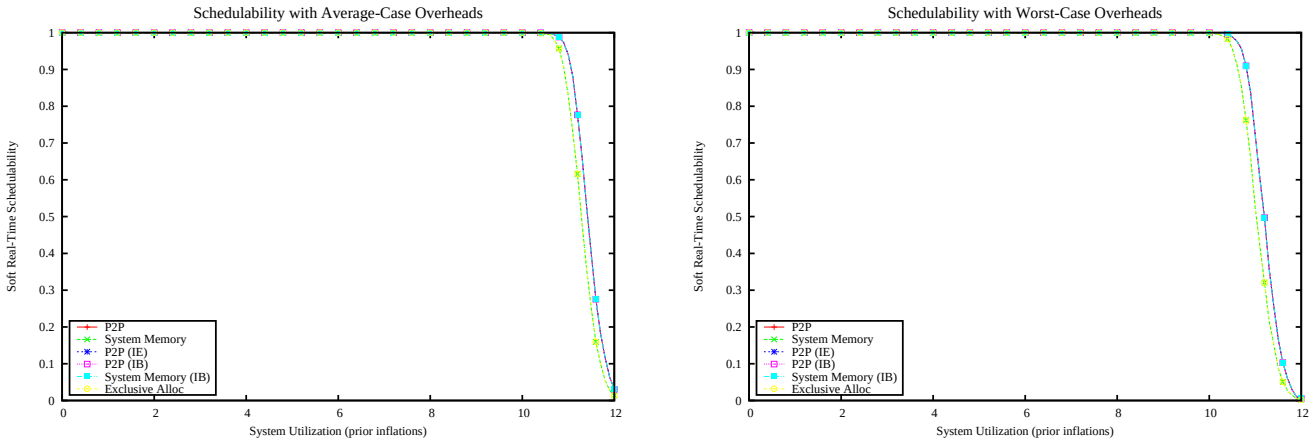

Figure 3635: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

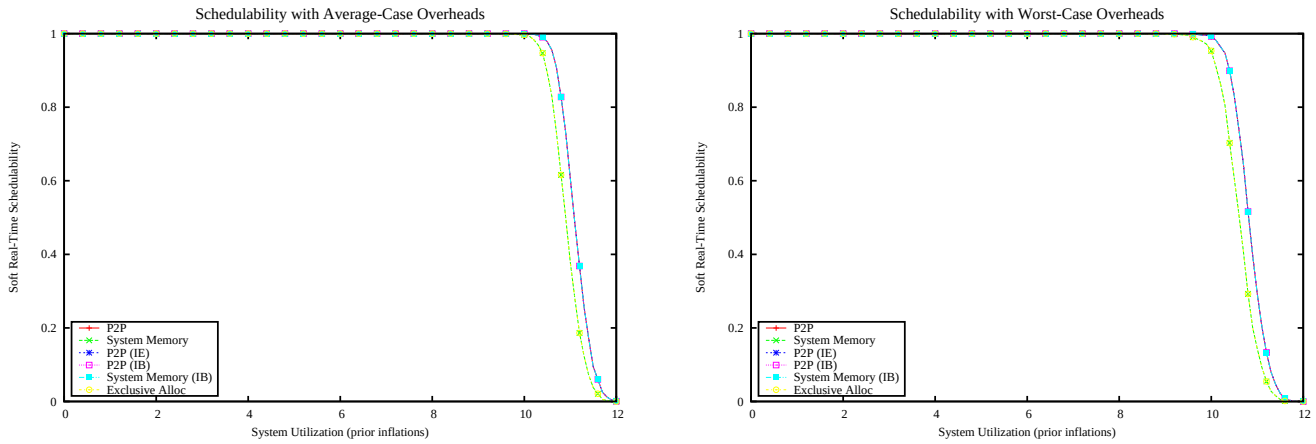

Figure 3636: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

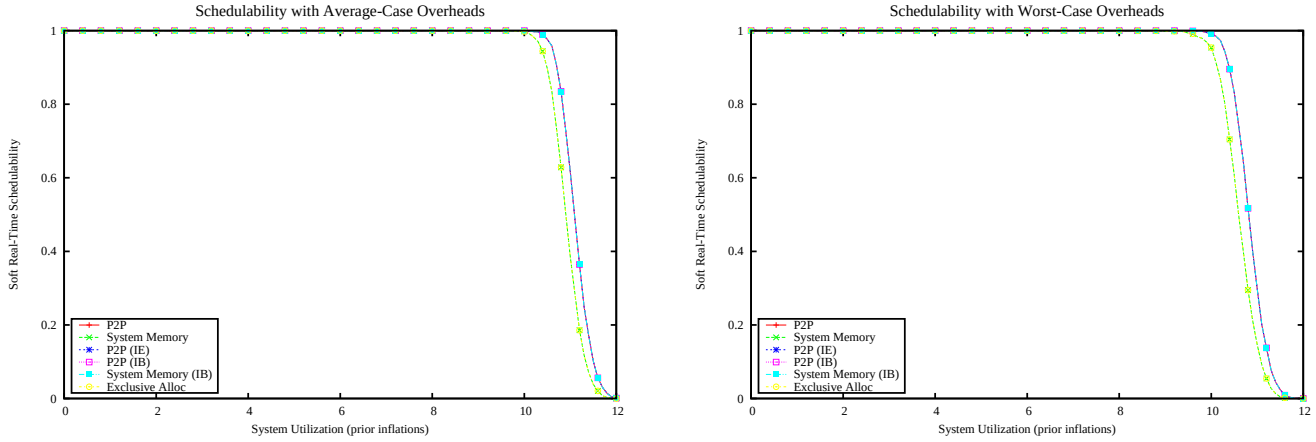

Figure 3637: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

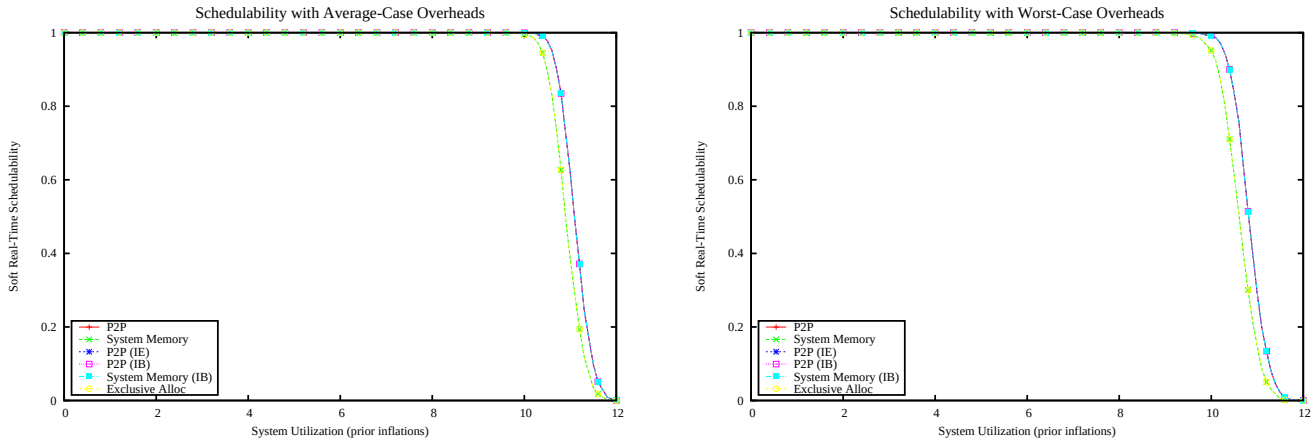

Figure 3638: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

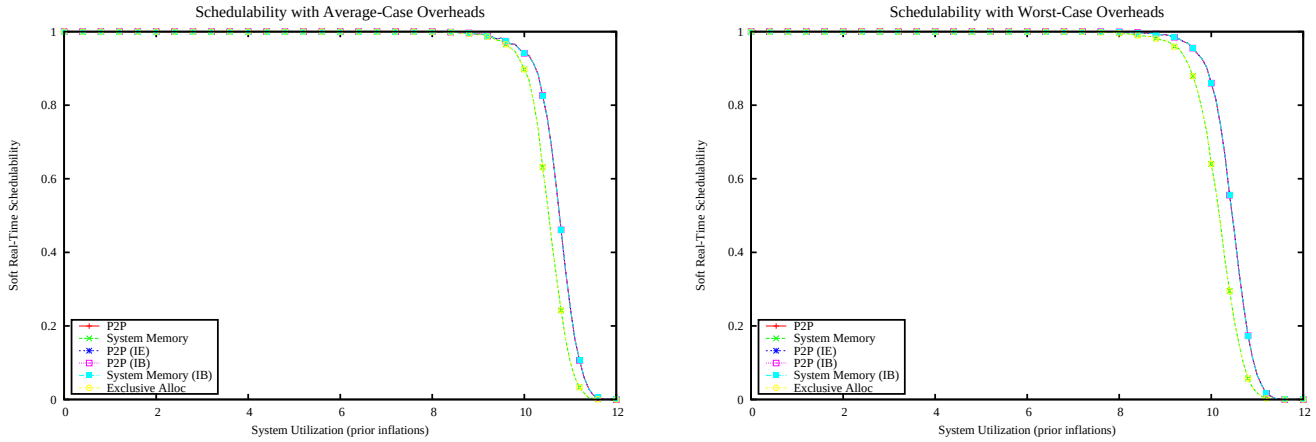

Figure 3639: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

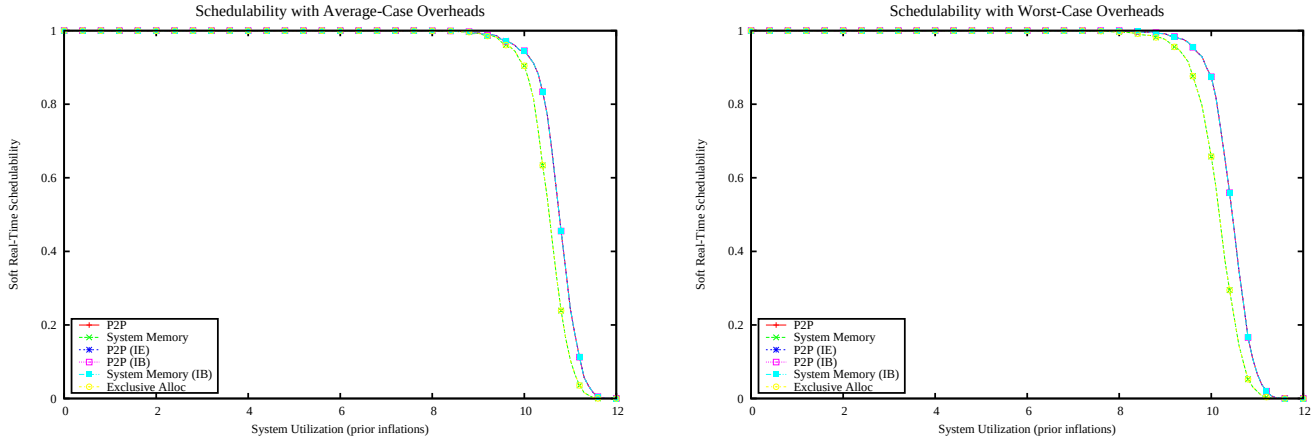

Figure 3640: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

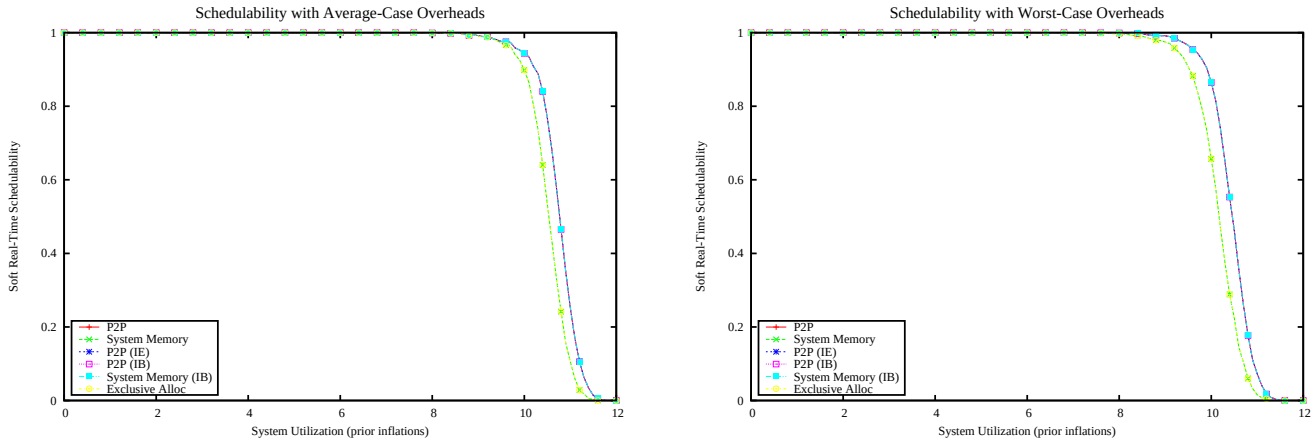

Figure 3641: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

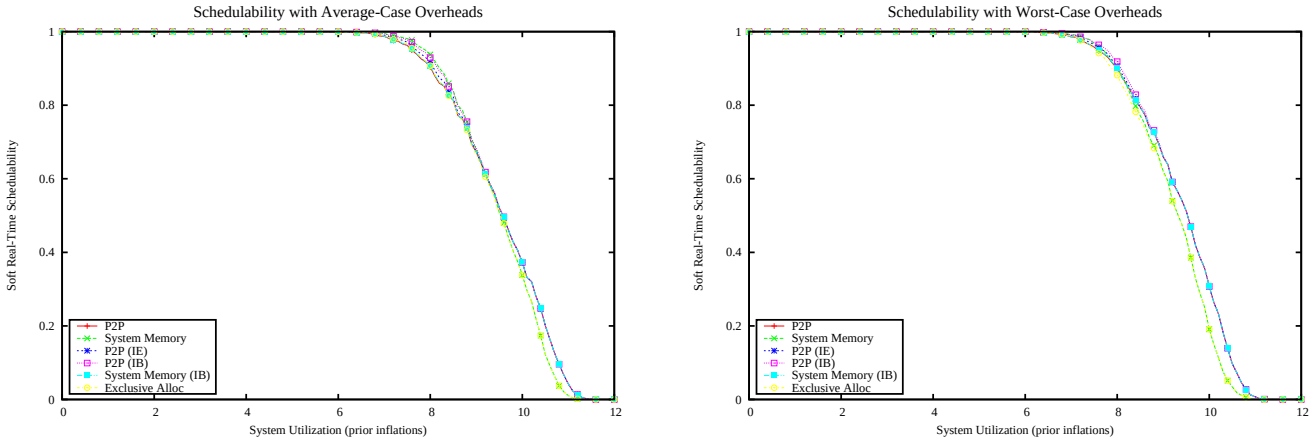

Figure 3642: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

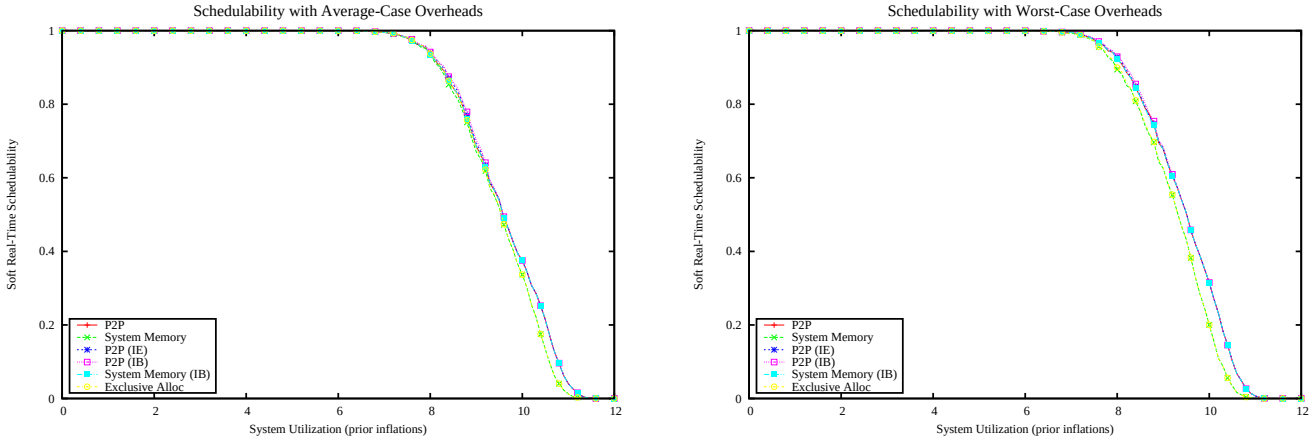

Figure 3643: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

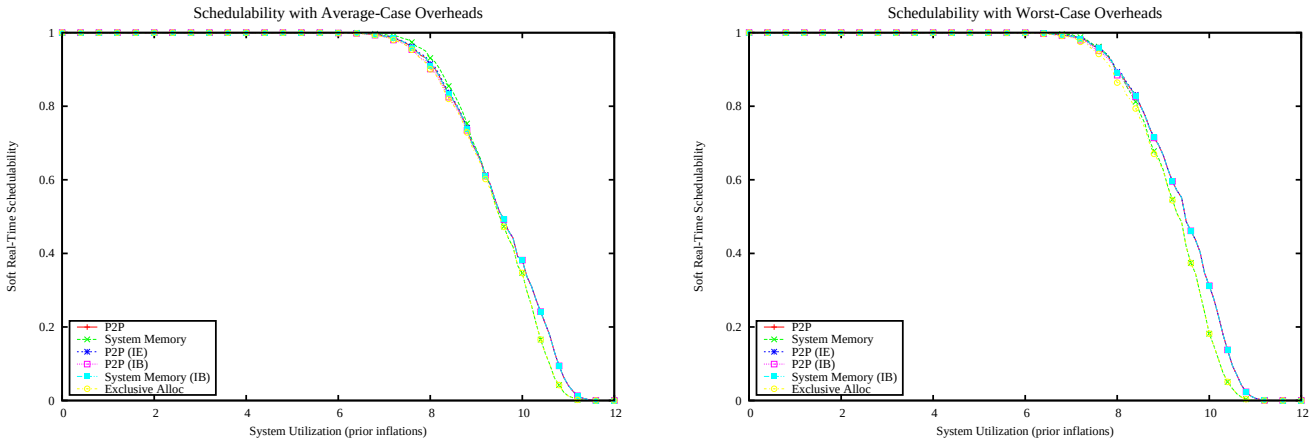

Figure 3644: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

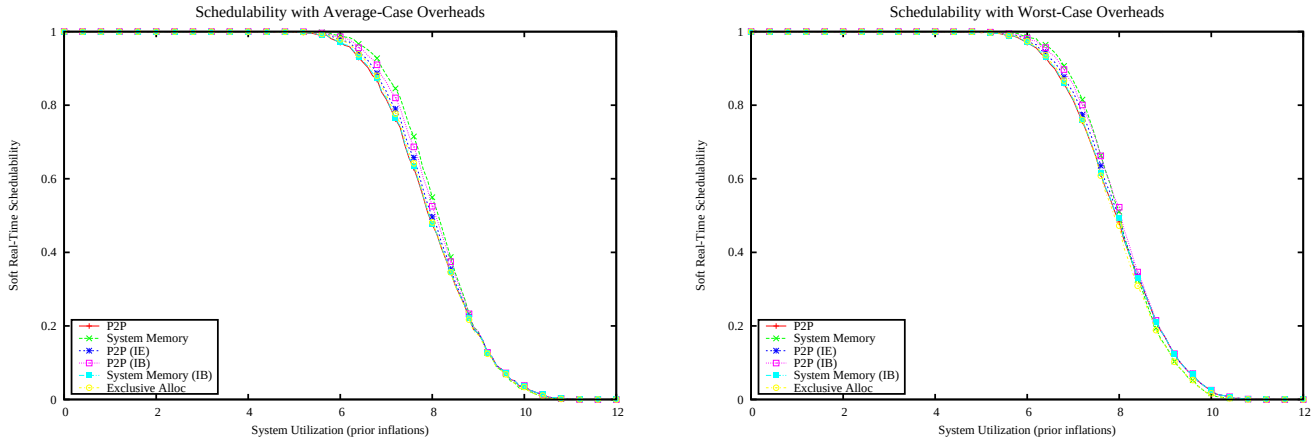

Figure 3645: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

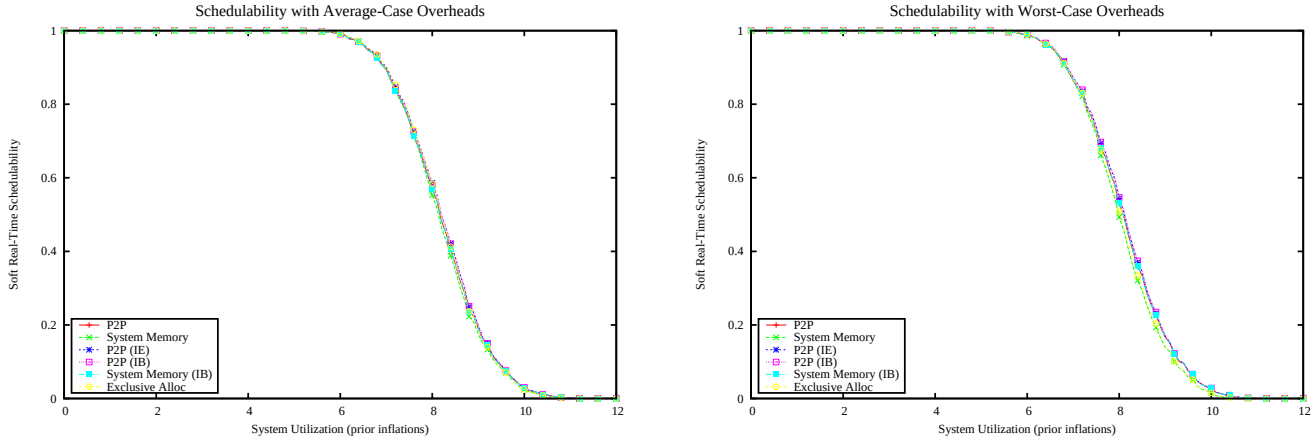

Figure 3646: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

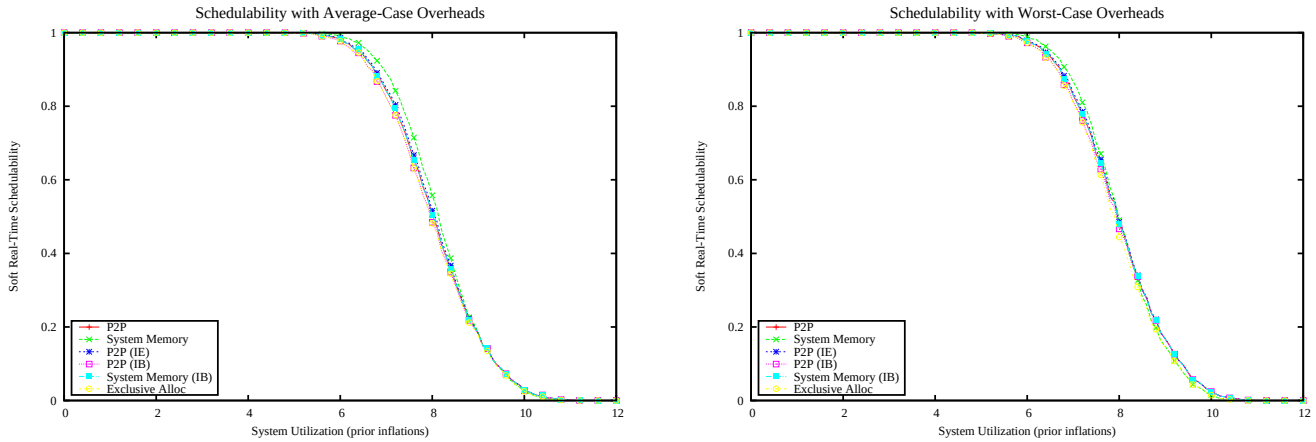

Figure 3647: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

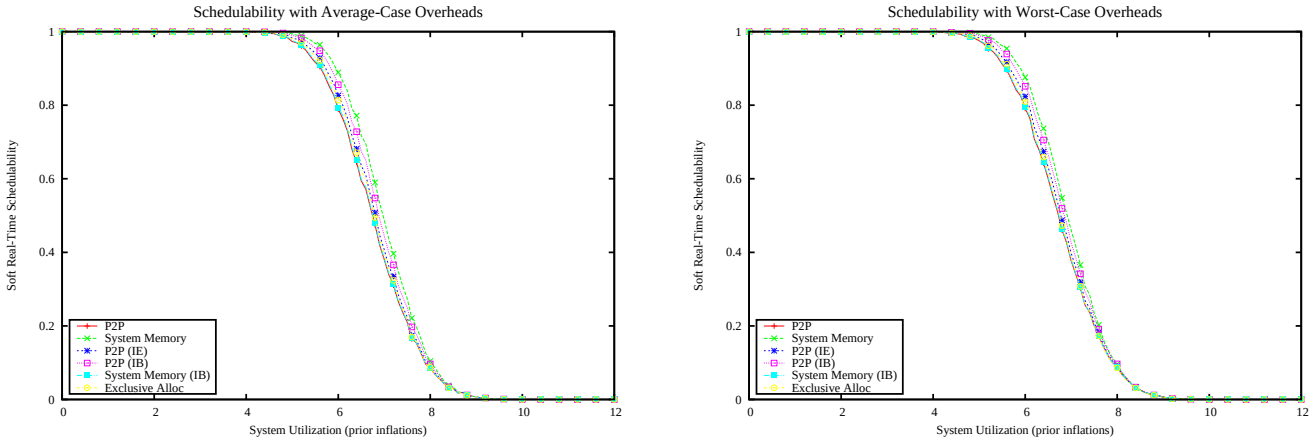

Figure 3648: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

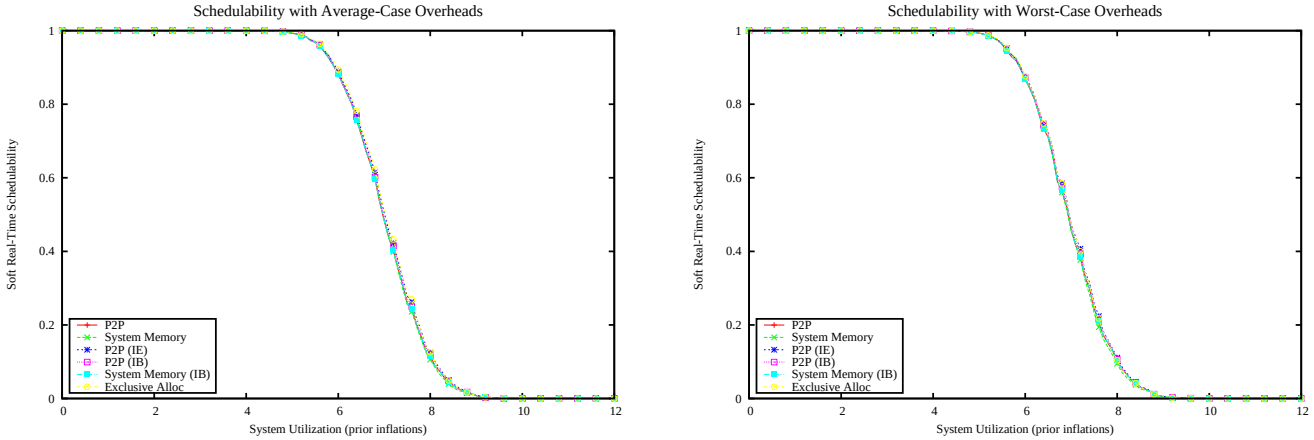

Figure 3649: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

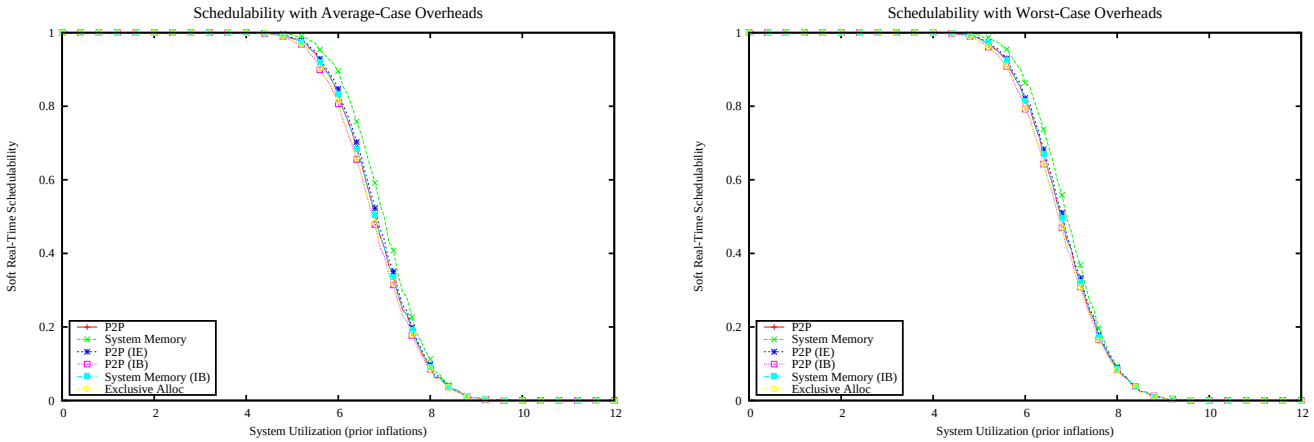

Figure 3650: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

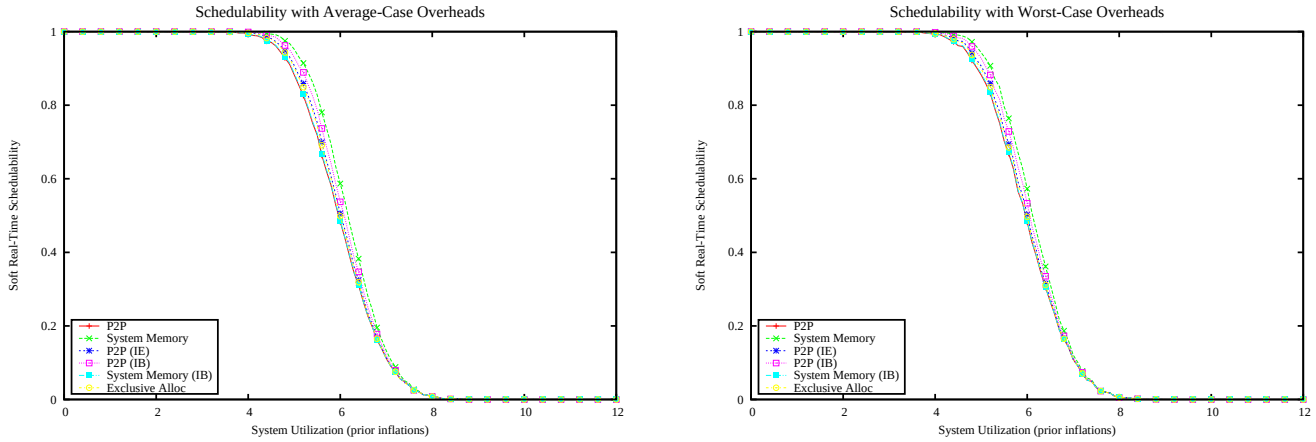

Figure 3651: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

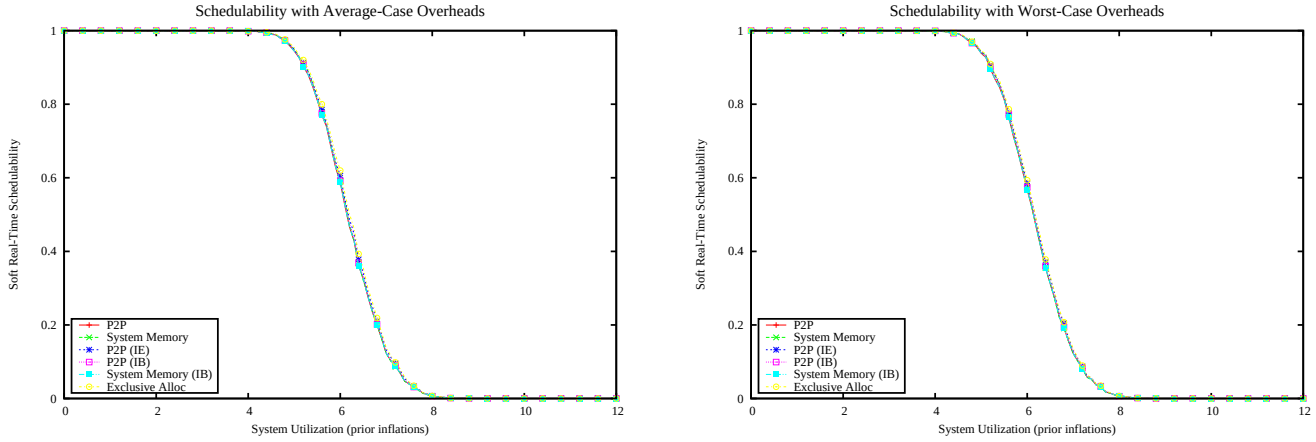

Figure 3652: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

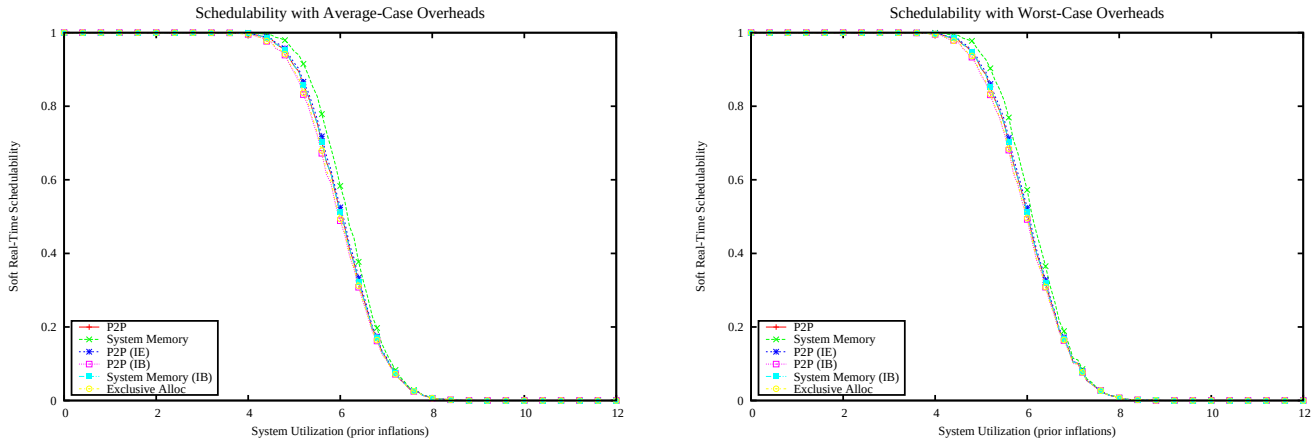

Figure 3653: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

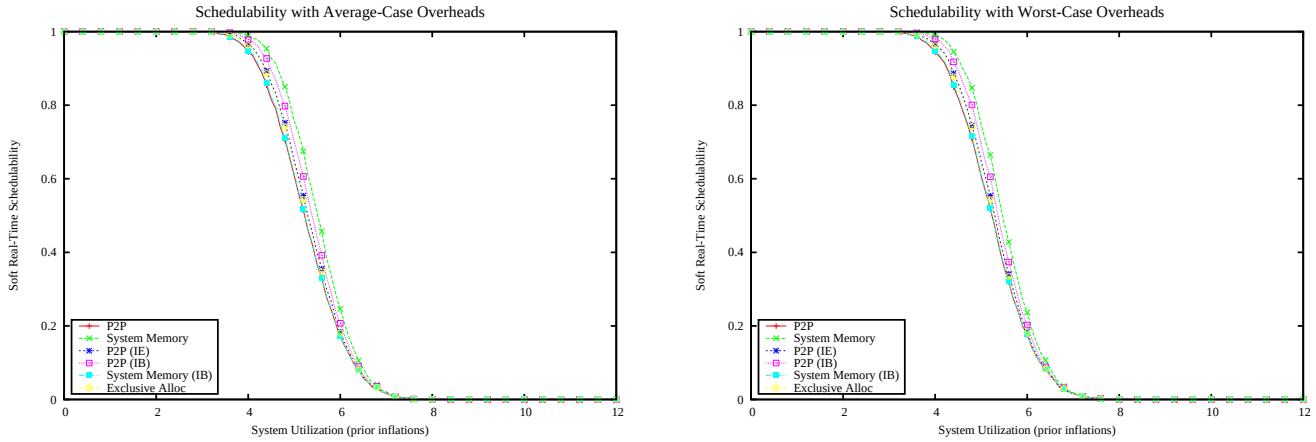

Figure 3654: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

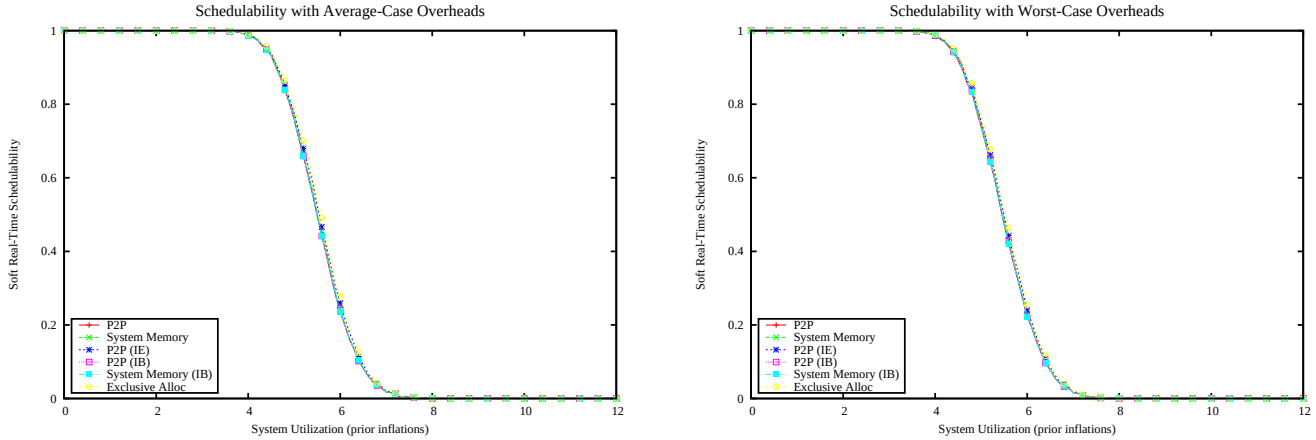

Figure 3655: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

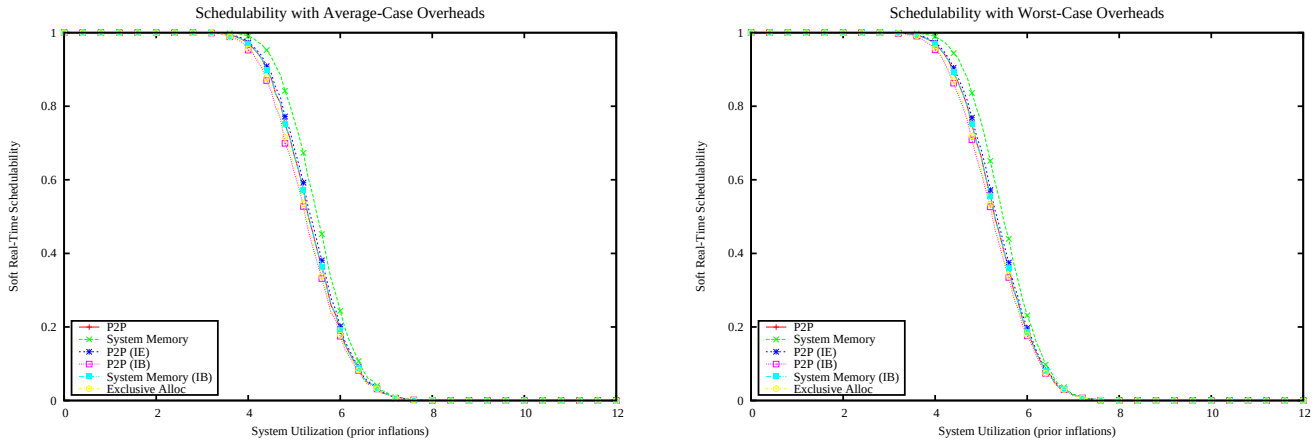

Figure 3656: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

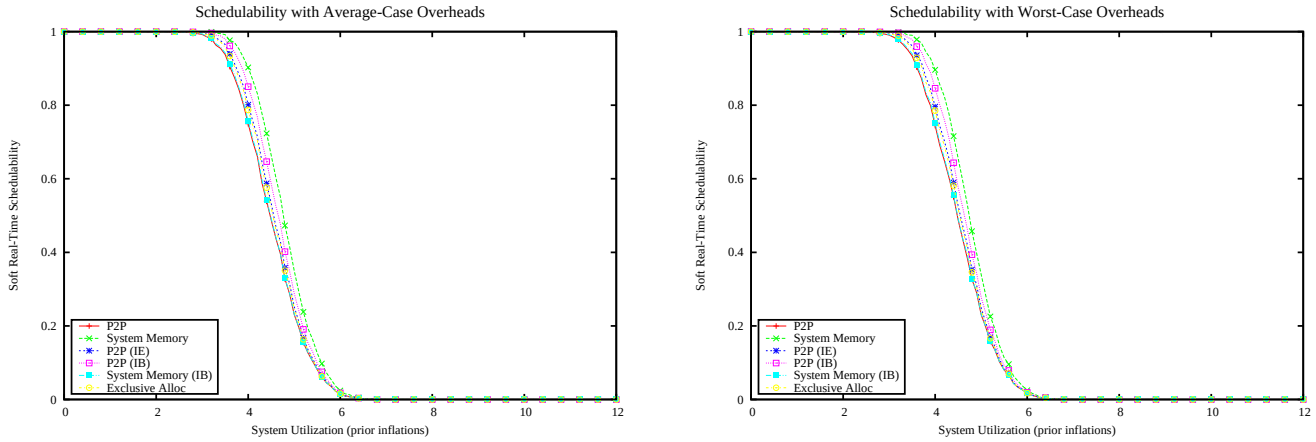

Figure 3657: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

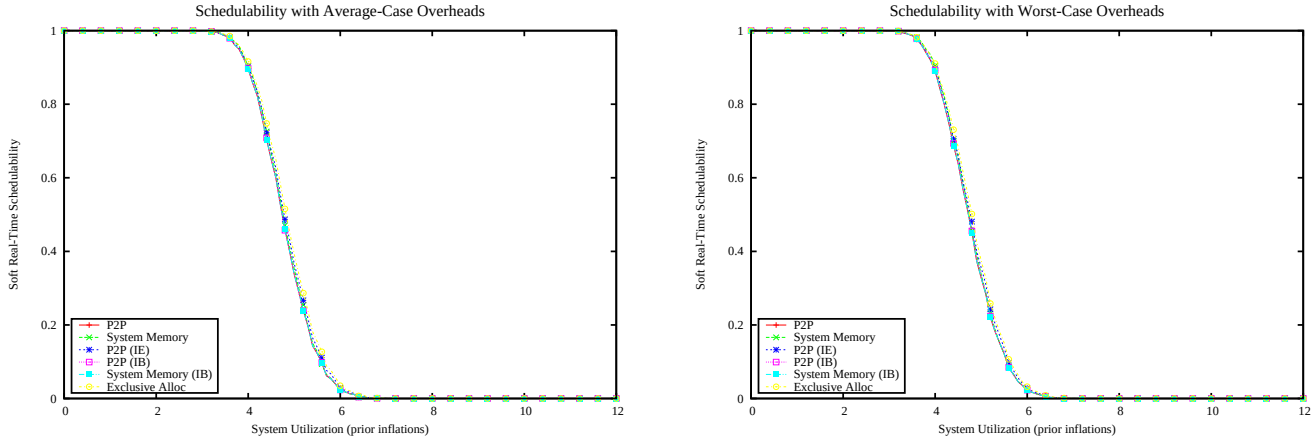

Figure 3658: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

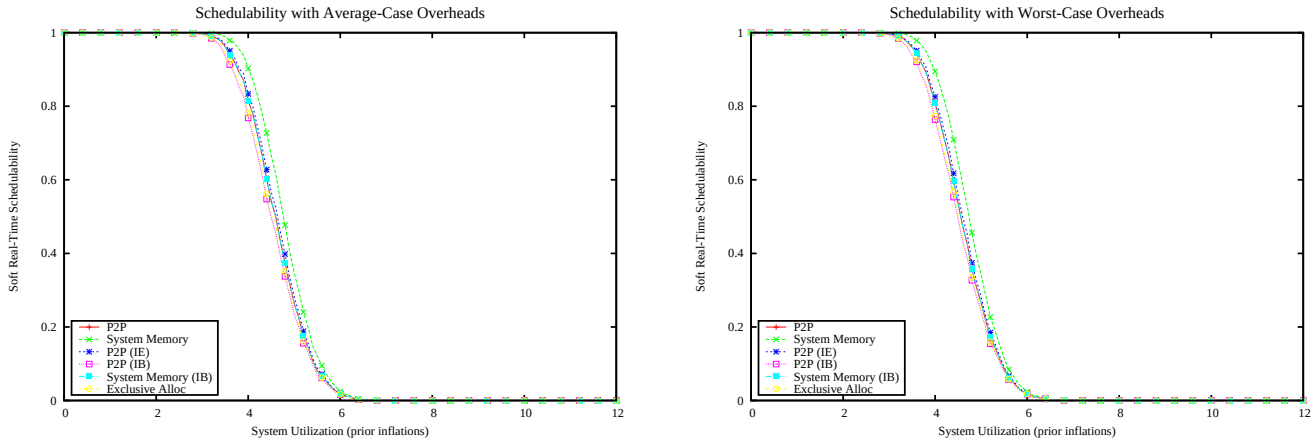

Figure 3659: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

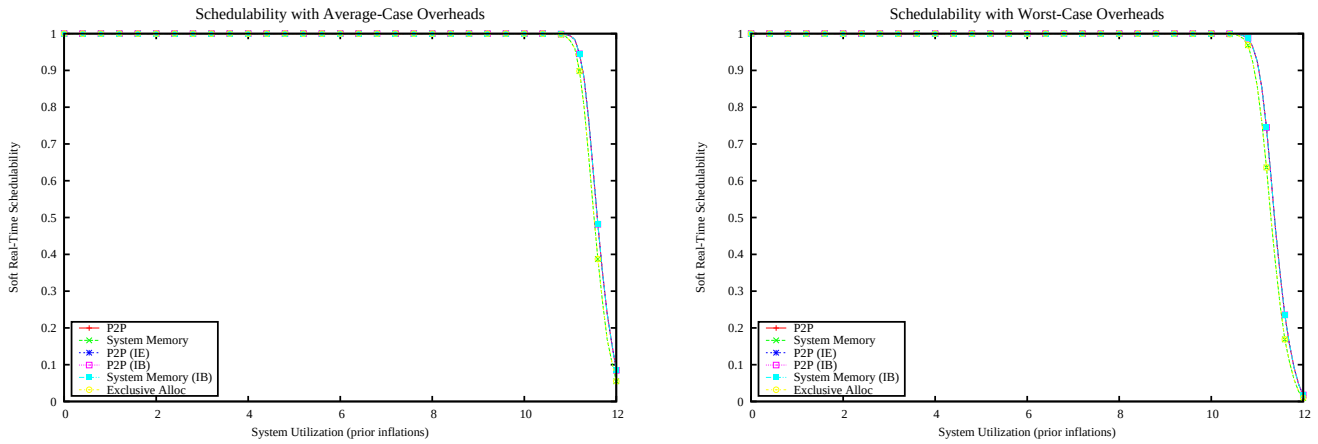

Figure 3660: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

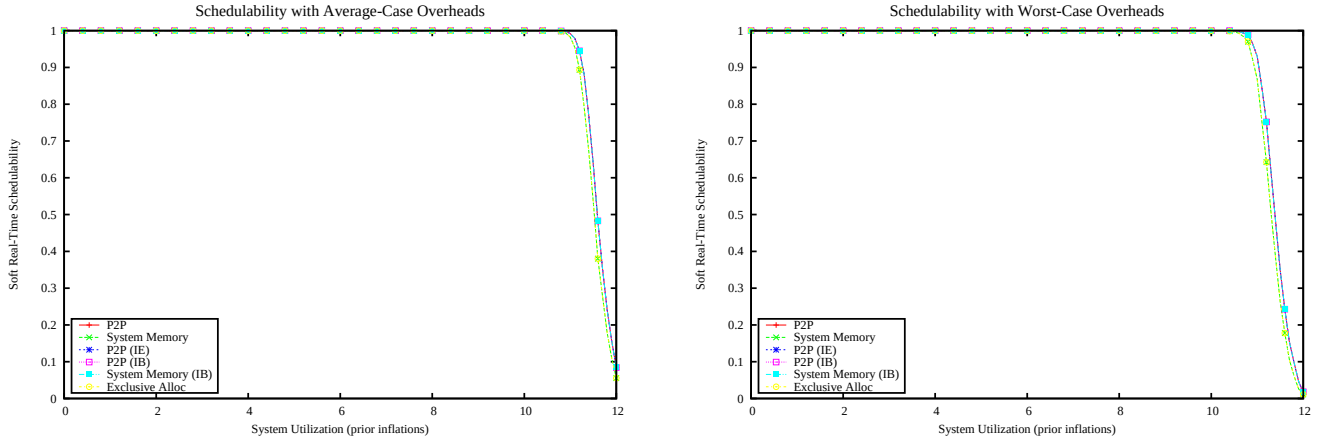

Figure 3661: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

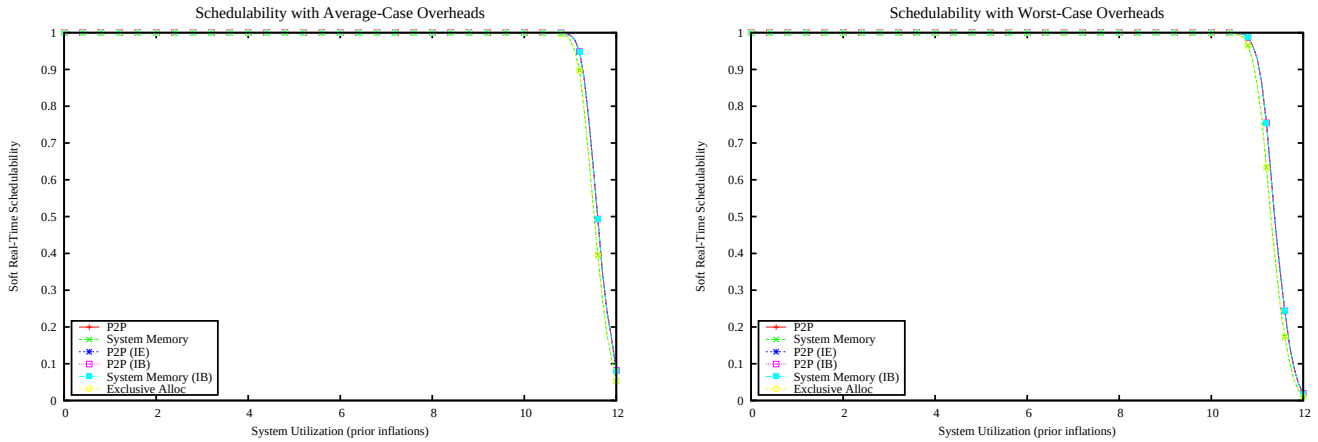

Figure 3662: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

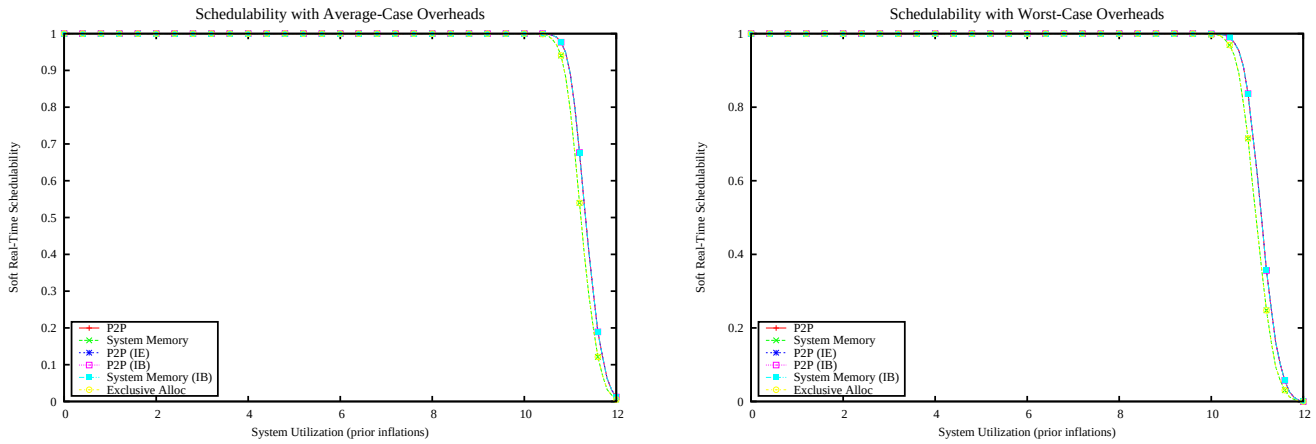

Figure 3663: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

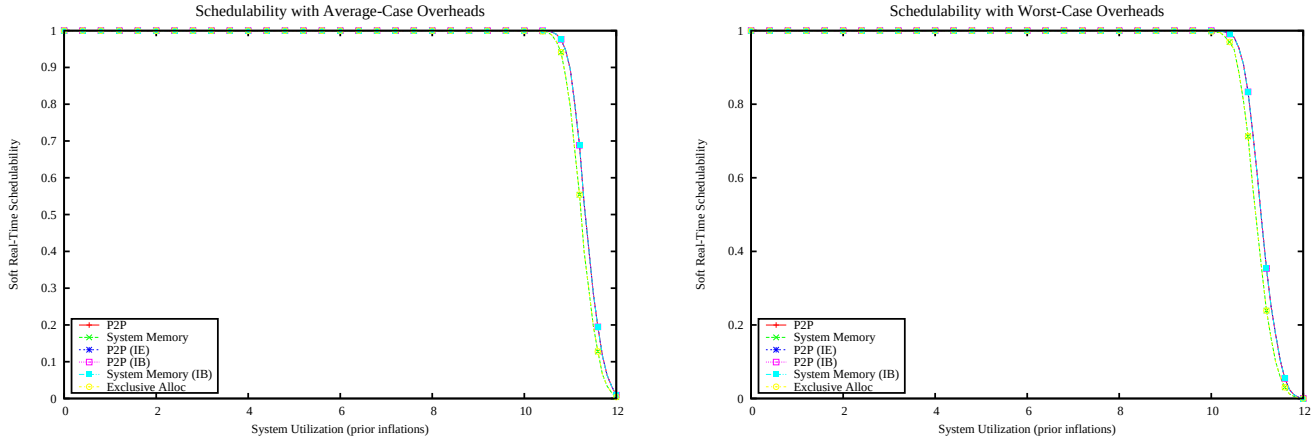

Figure 3664: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

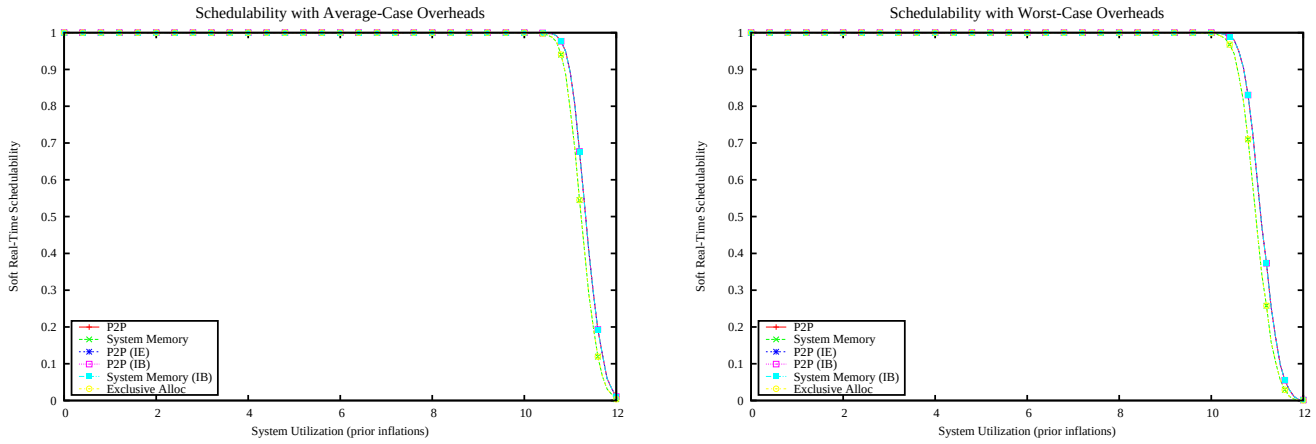

Figure 3665: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

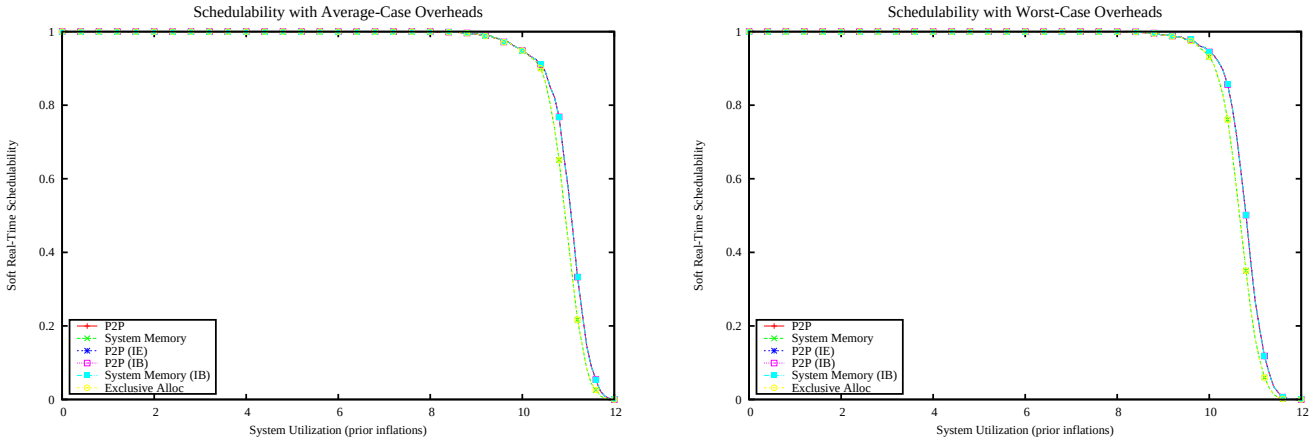

Figure 3666: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

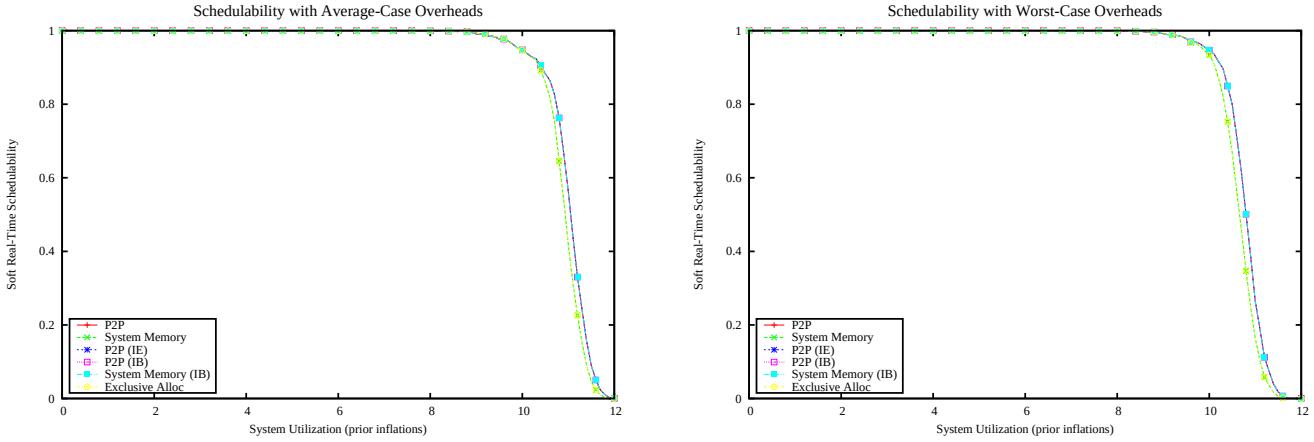

Figure 3667: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

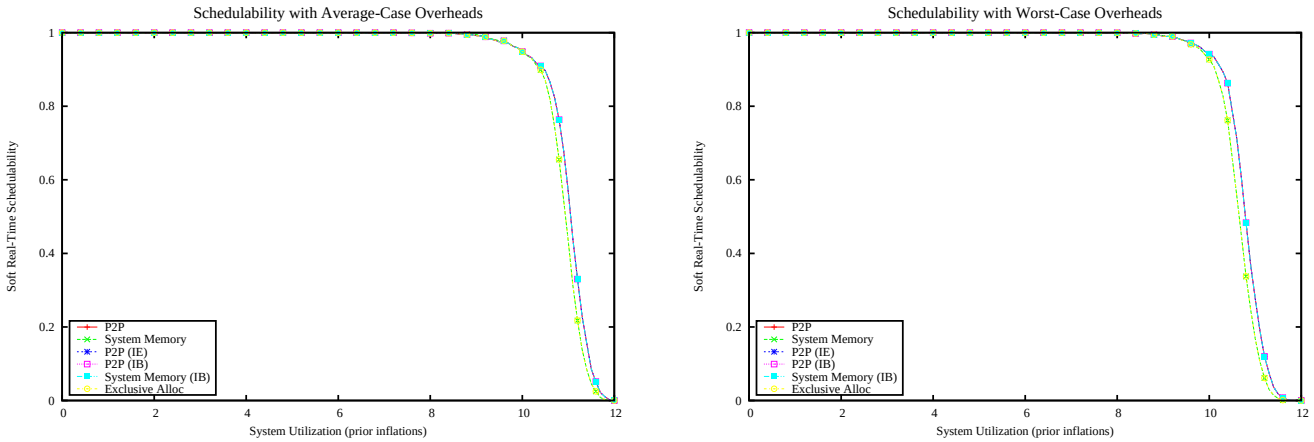

Figure 3668: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

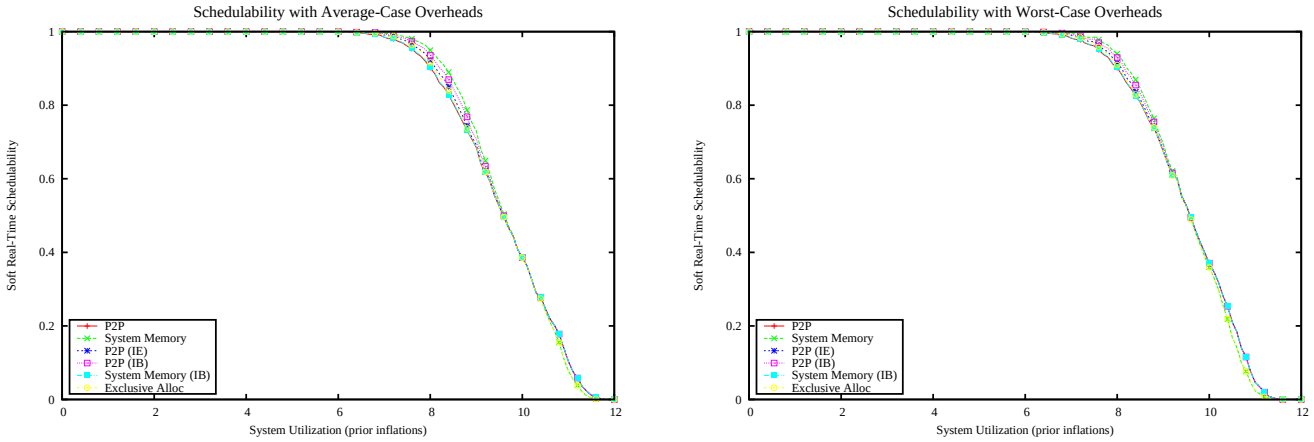

Figure 3669: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

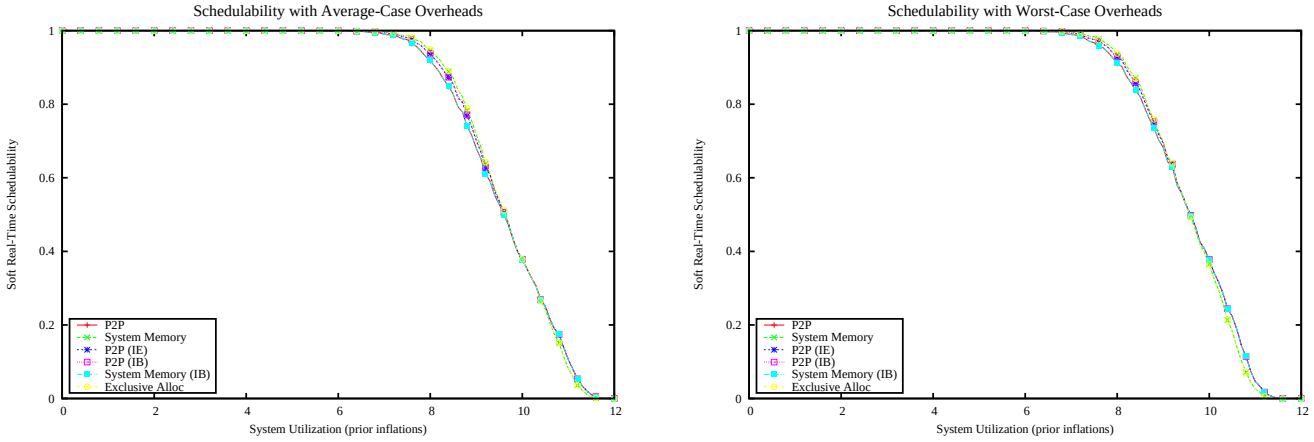

Figure 3670: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

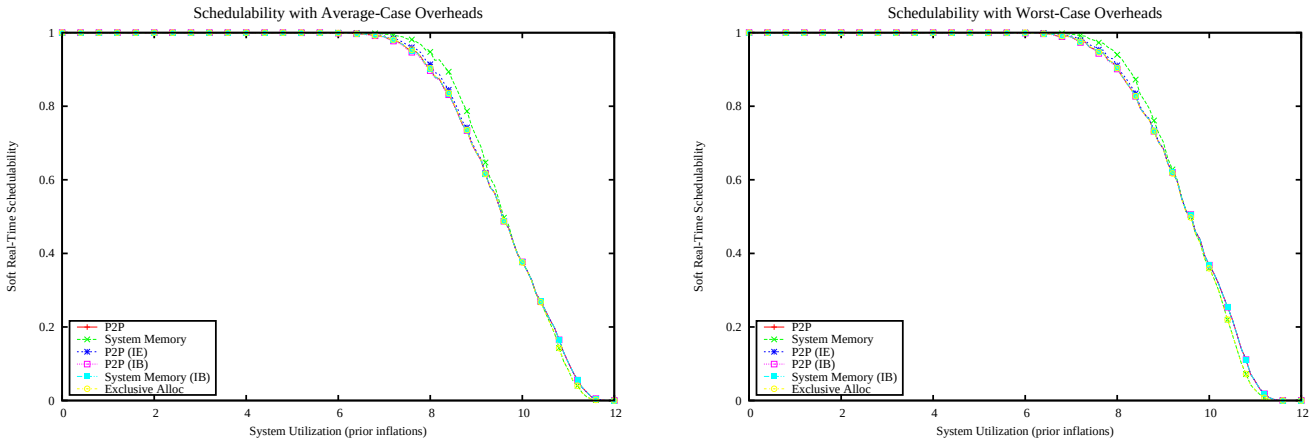

Figure 3671: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

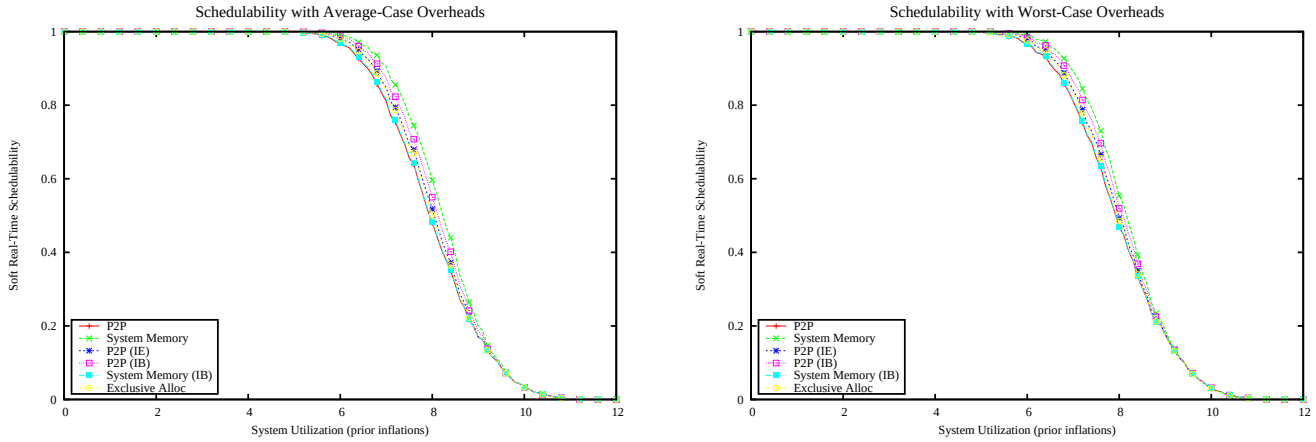

Figure 3672: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

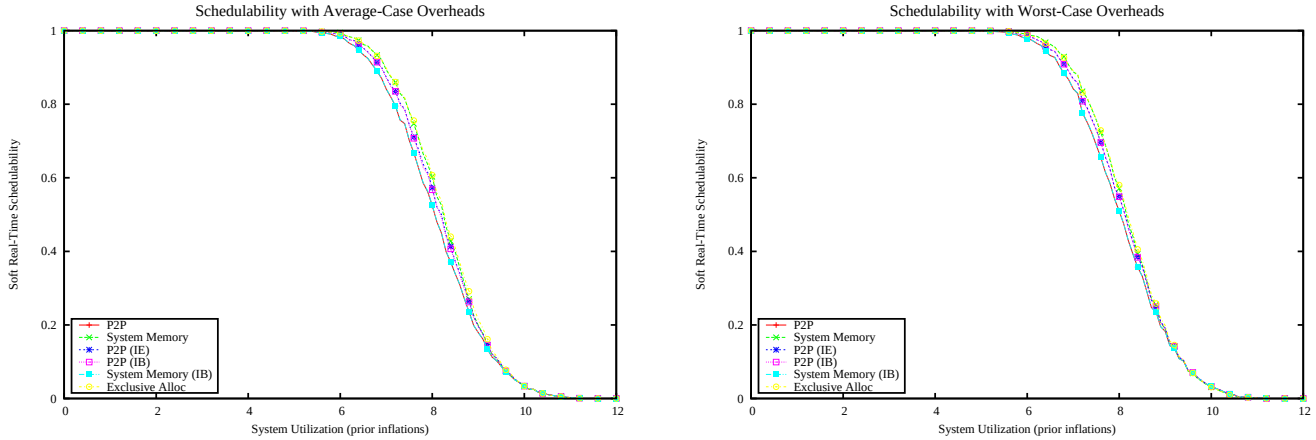

Figure 3673: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

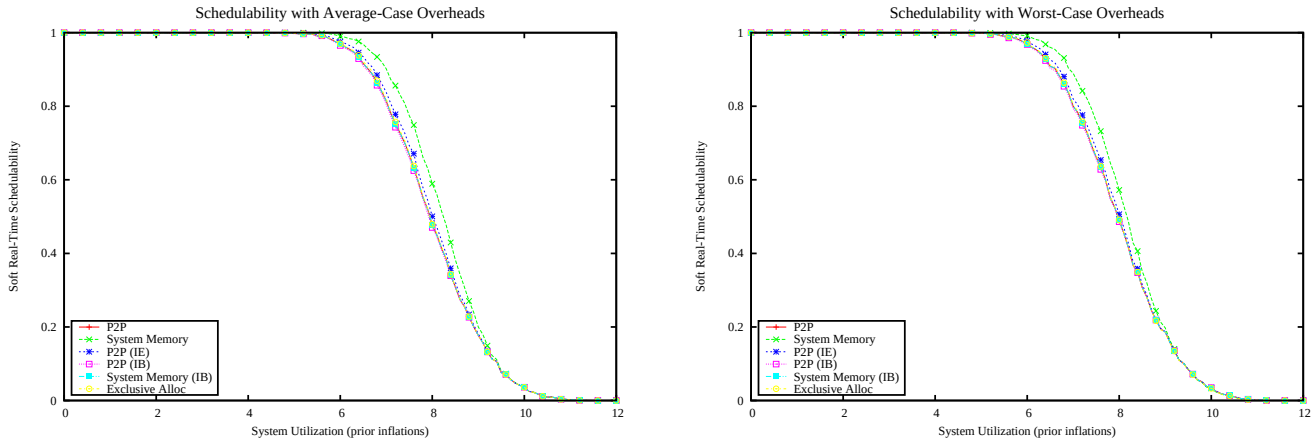

Figure 3674: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

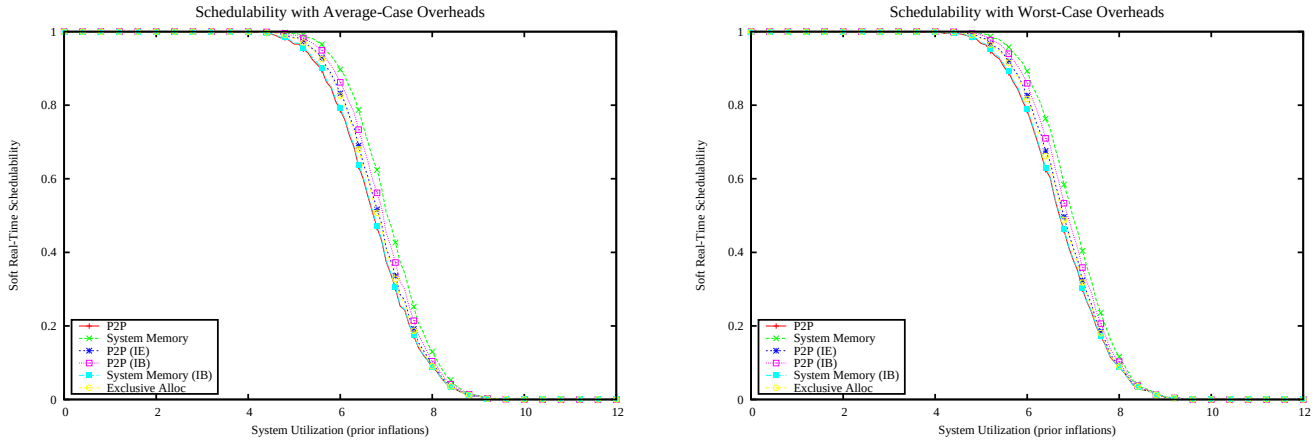

Figure 3675: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

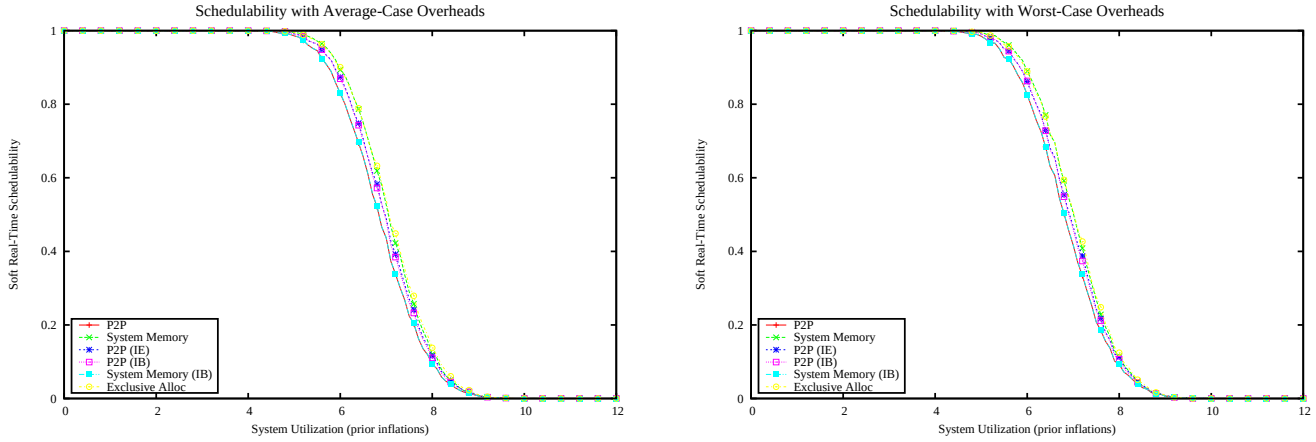

Figure 3676: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

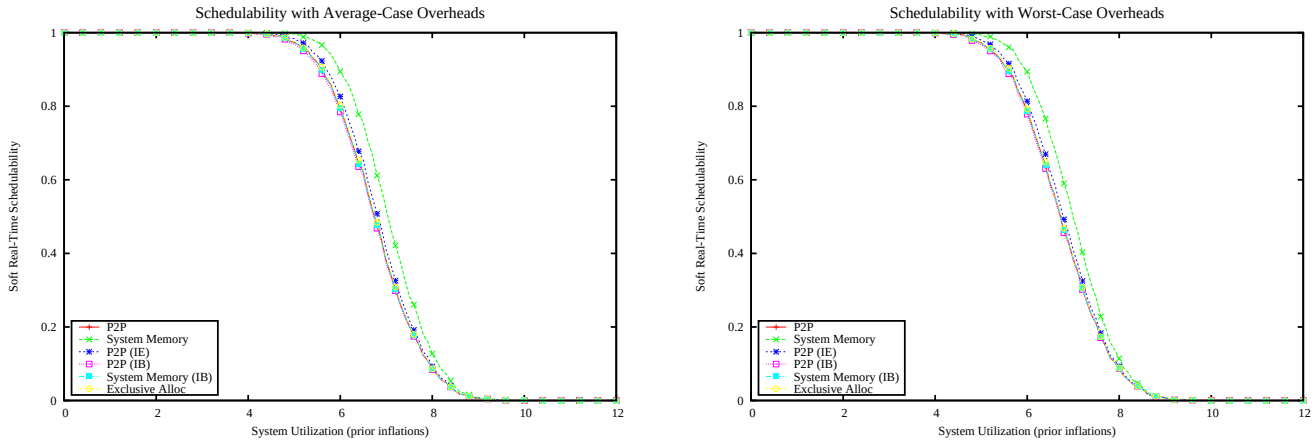

Figure 3677: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

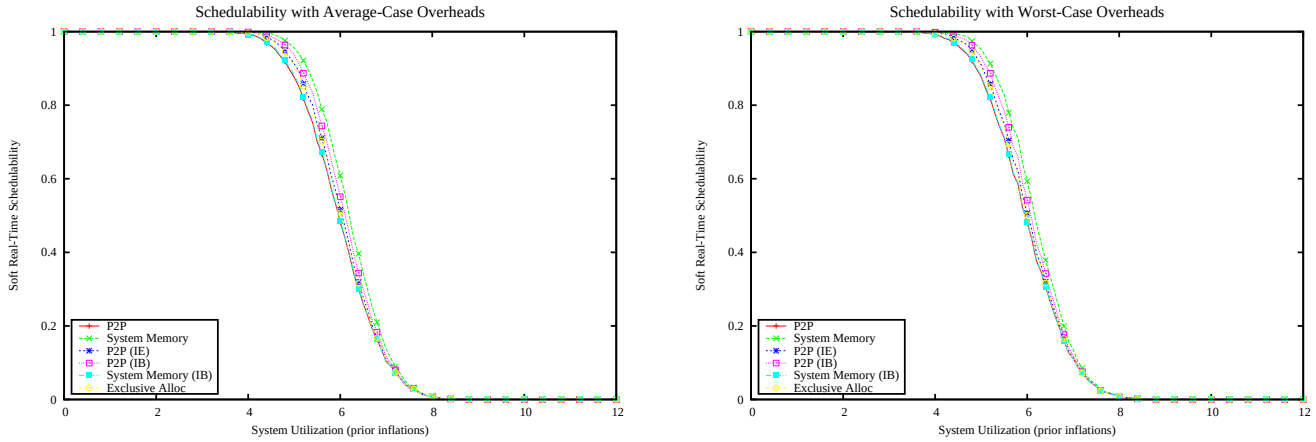

Figure 3678: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

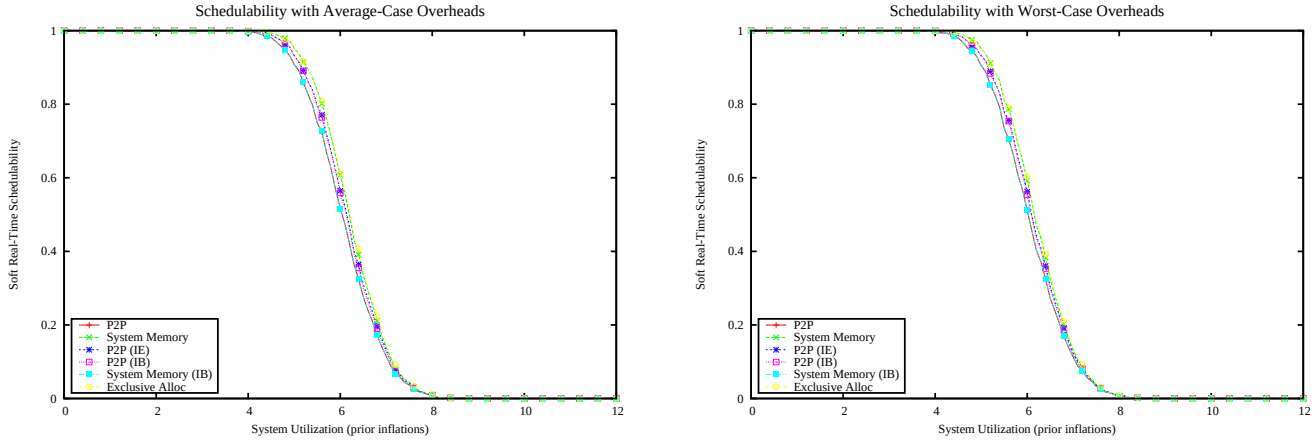

Figure 3679: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

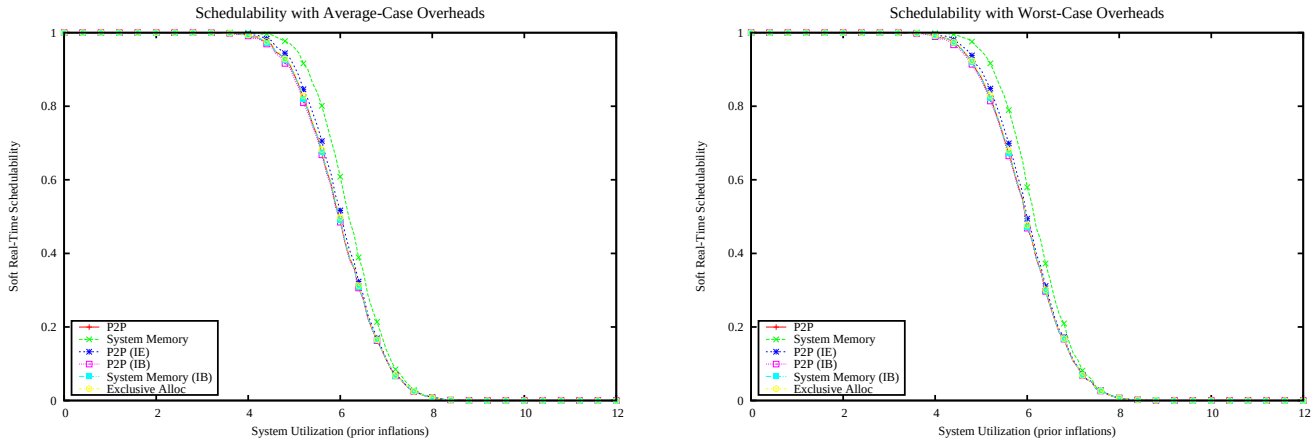

Figure 3680: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

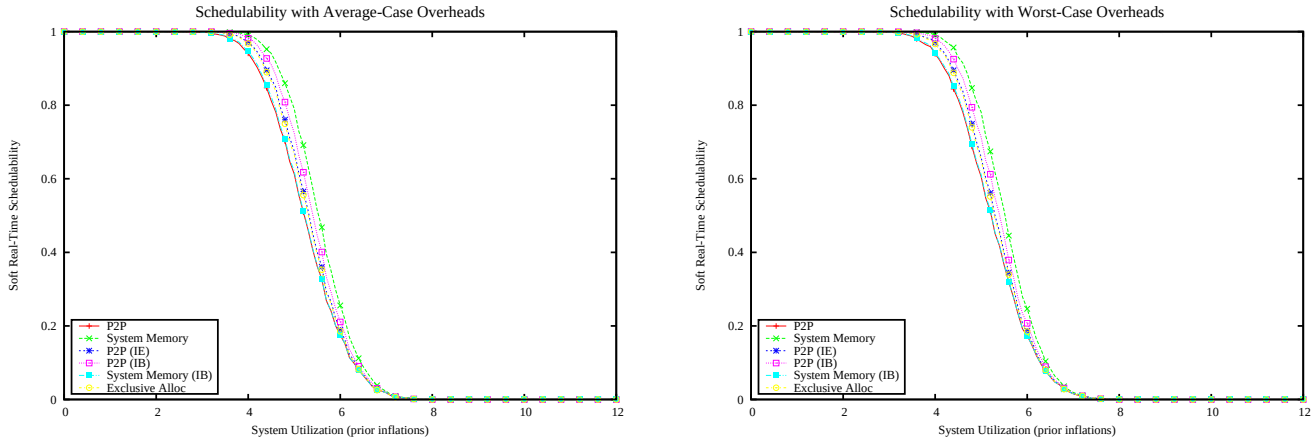

Figure 3681: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

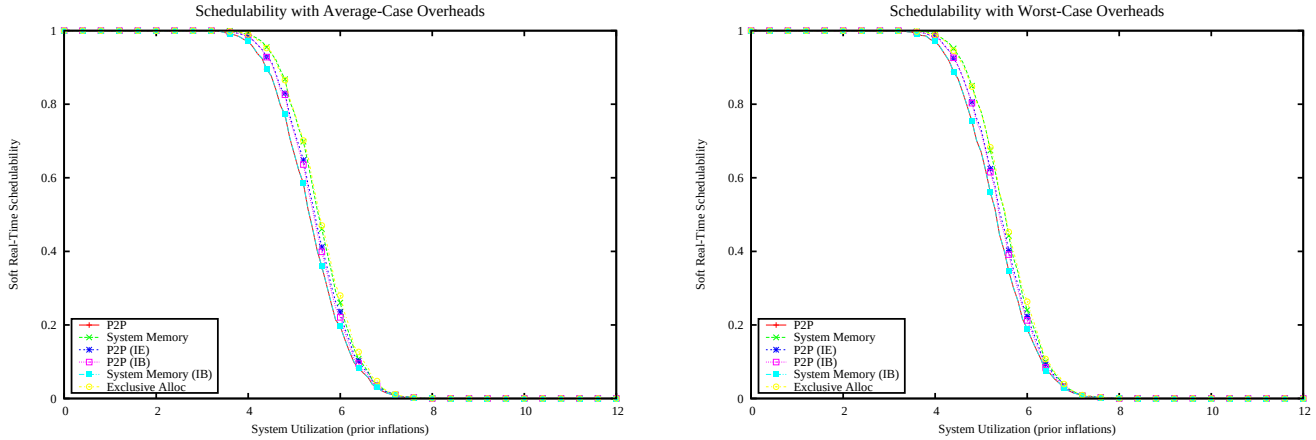

Figure 3682: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

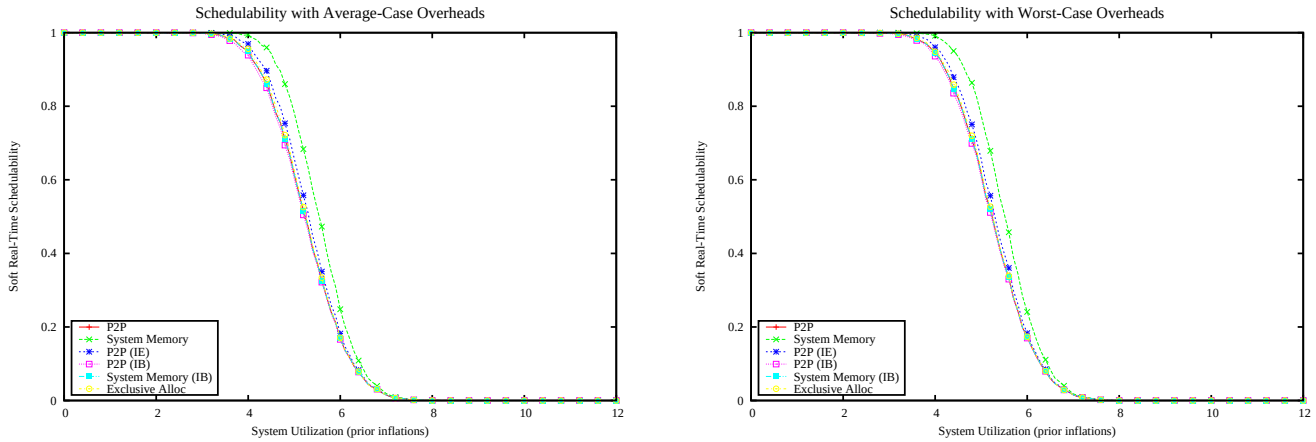

Figure 3683: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

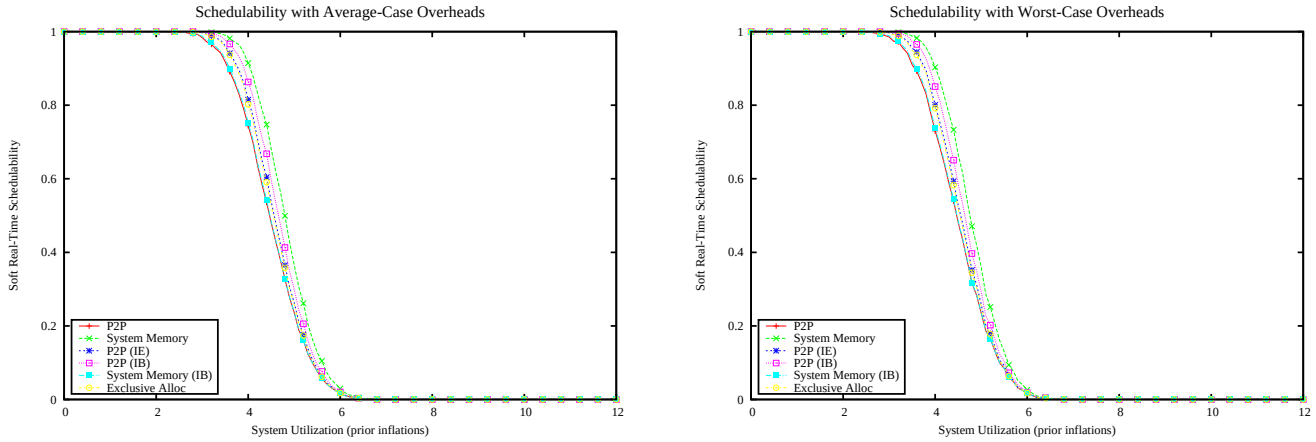

Figure 3684: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

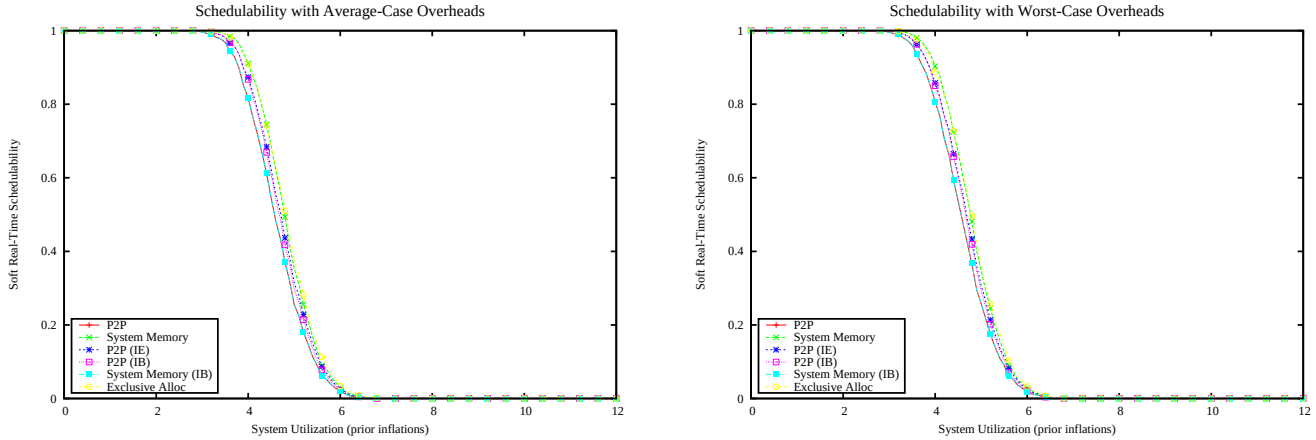

Figure 3685: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

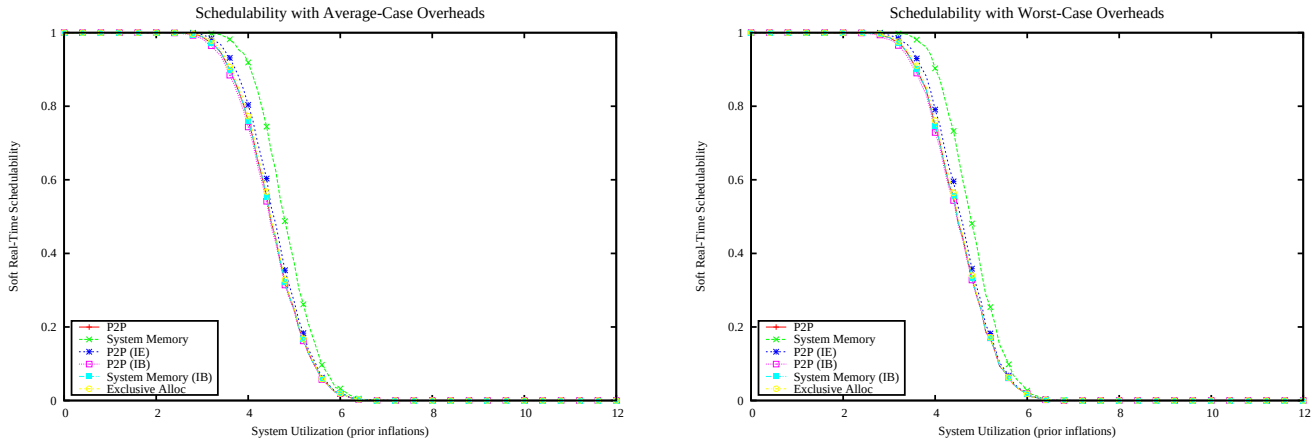

Figure 3686: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

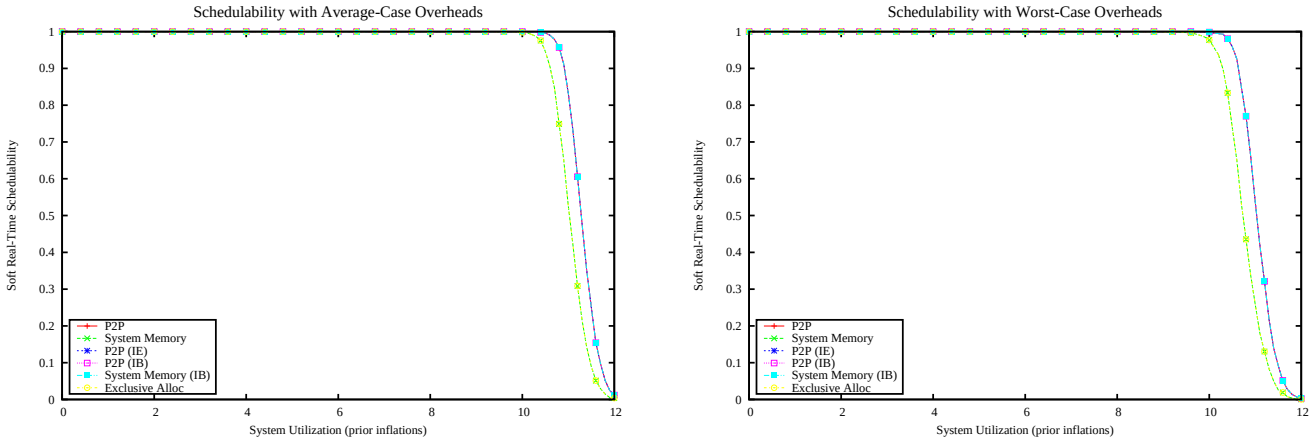

Figure 3687: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

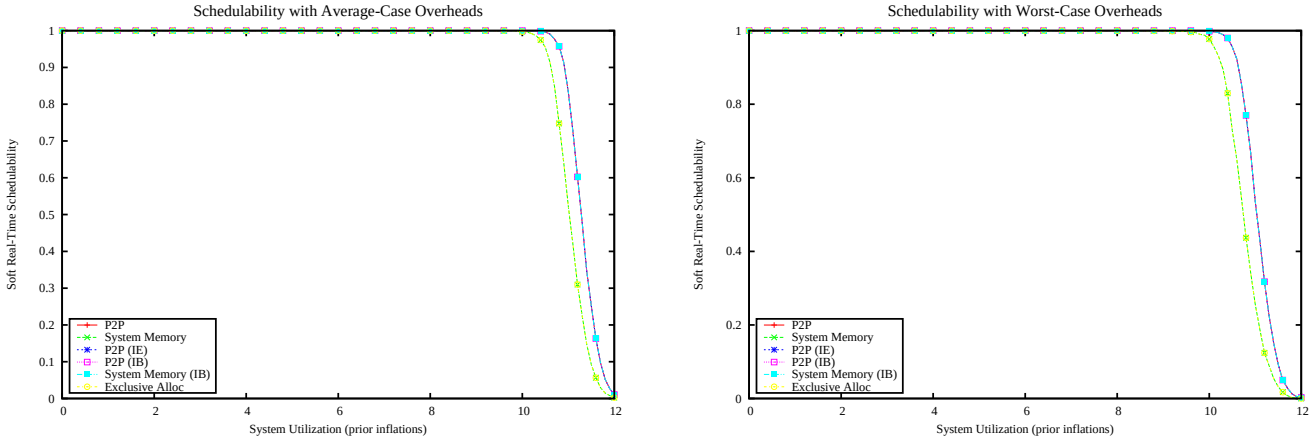

Figure 3688: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

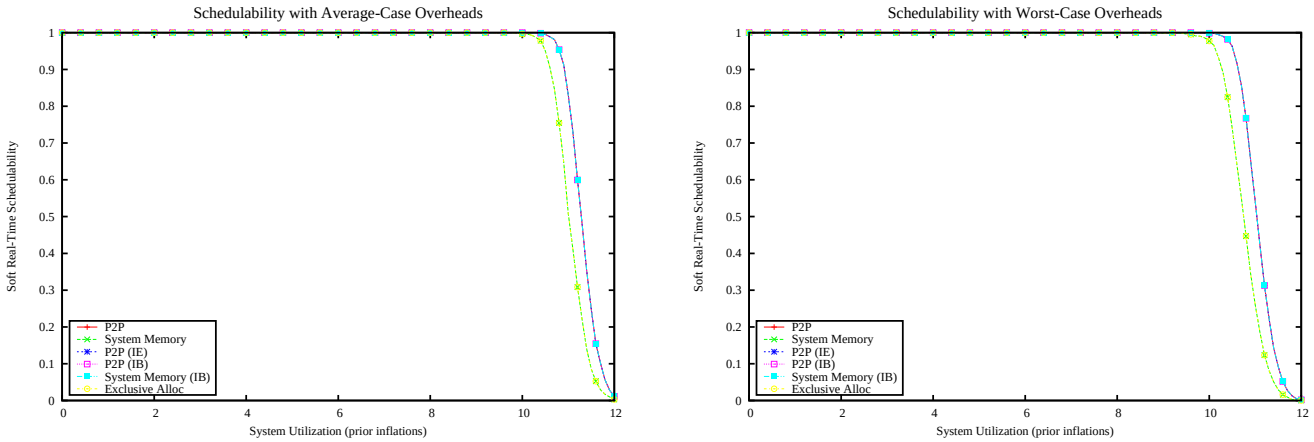

Figure 3689: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

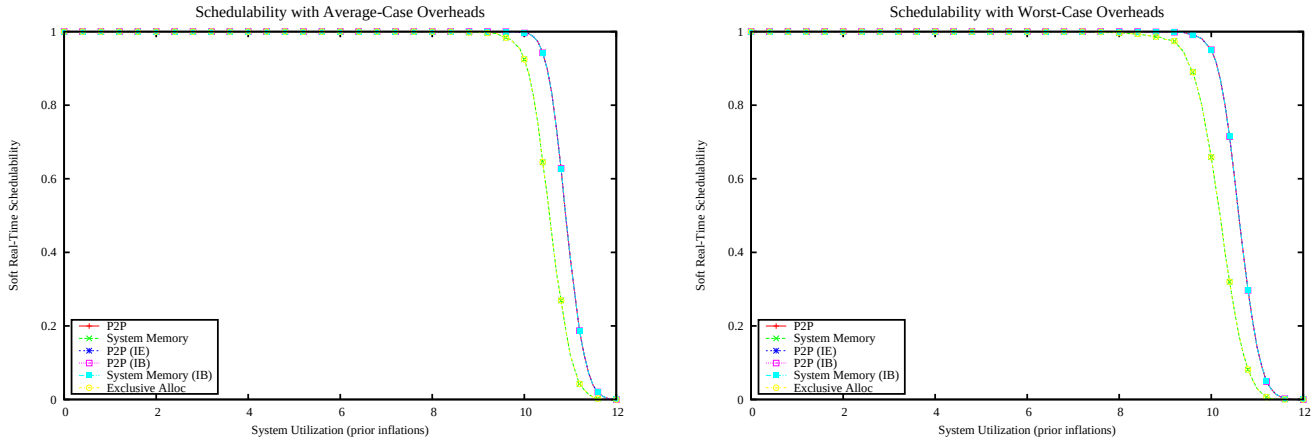

Figure 3690: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

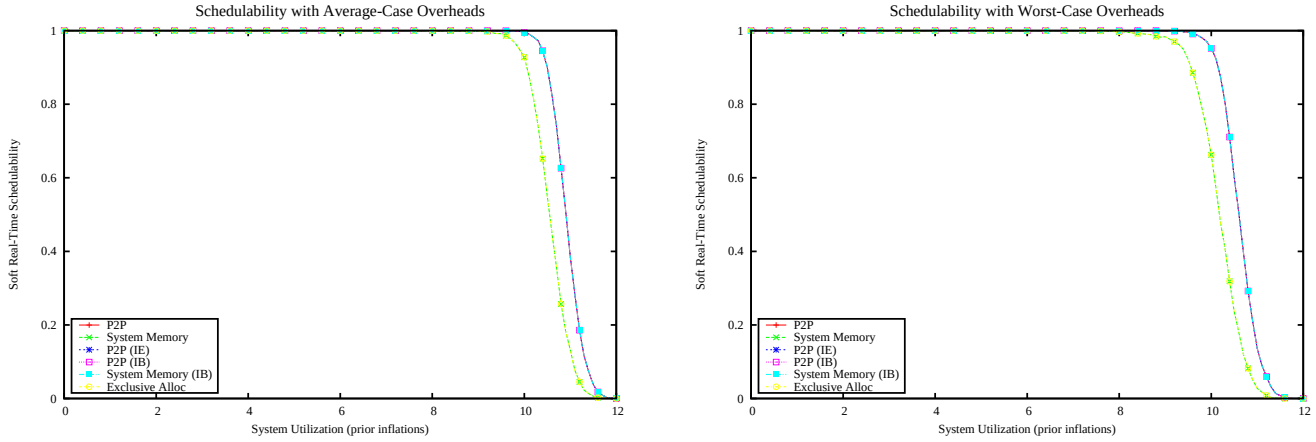

Figure 3691: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

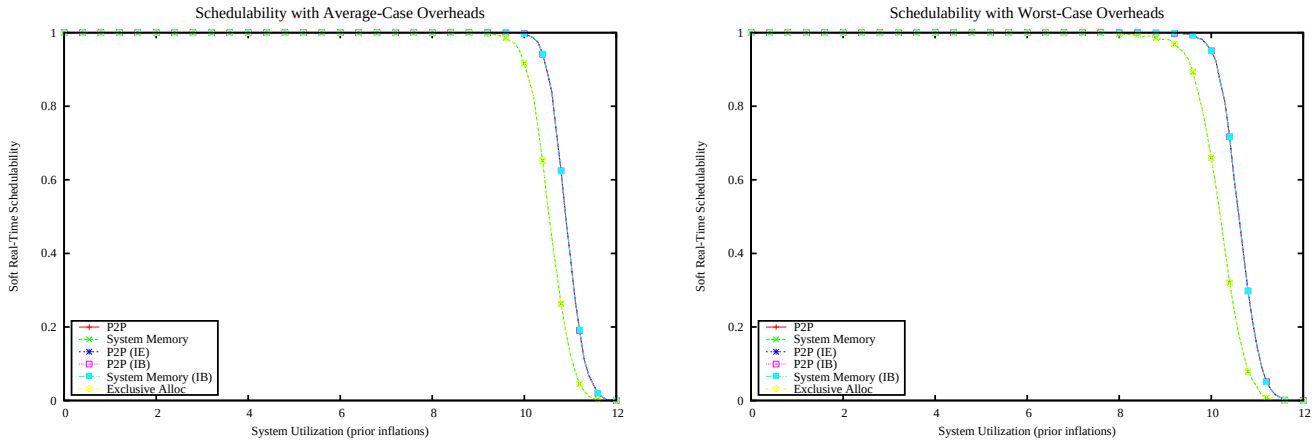

Figure 3692: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

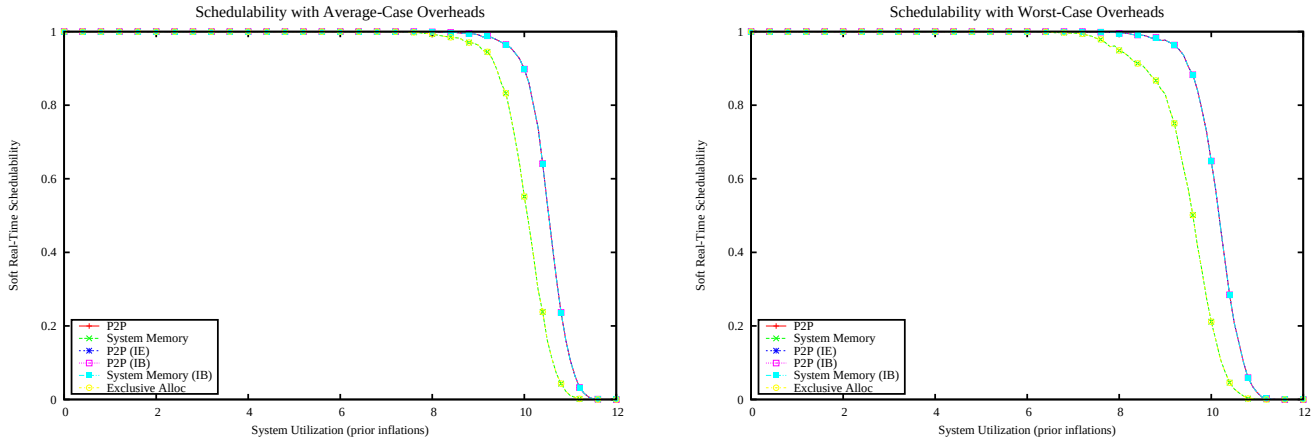

Figure 3693: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

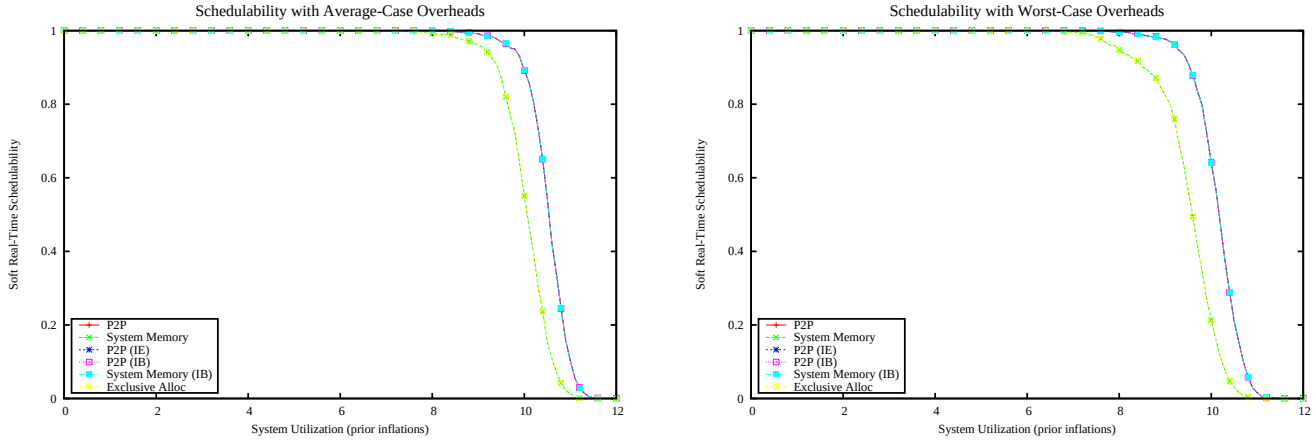

Figure 3694: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

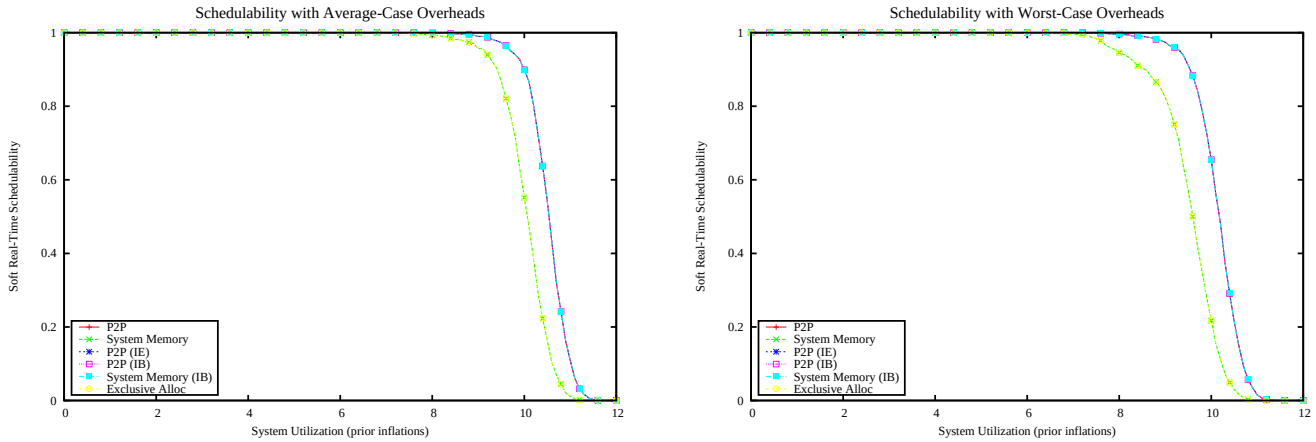

Figure 3695: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

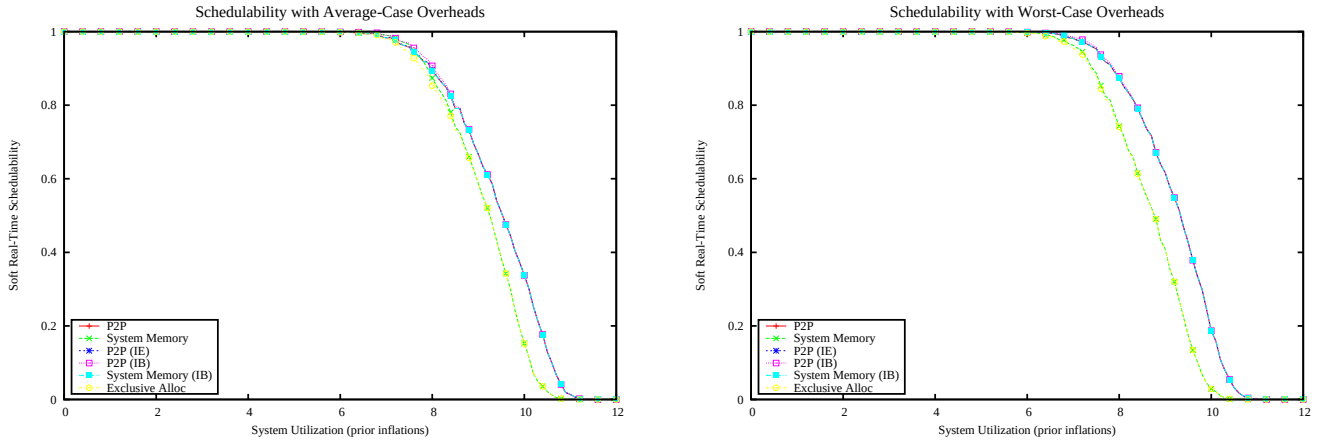

Figure 3696: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

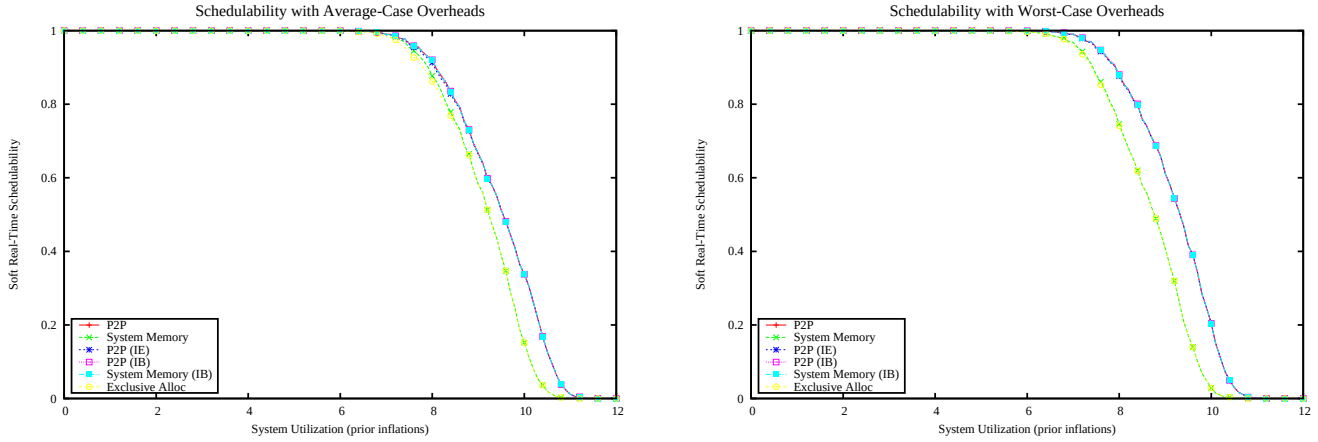

Figure 3697: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

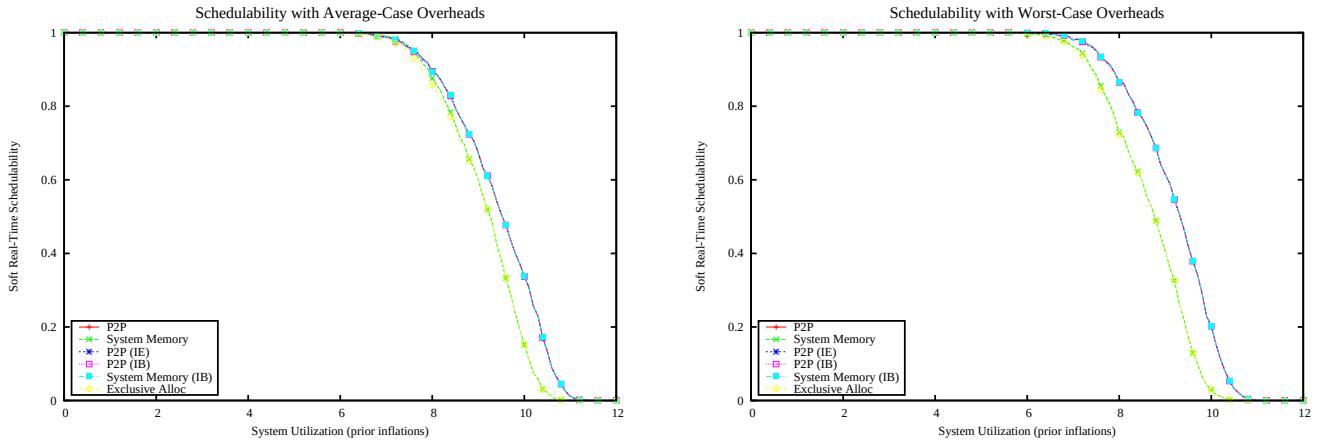

Figure 3698: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

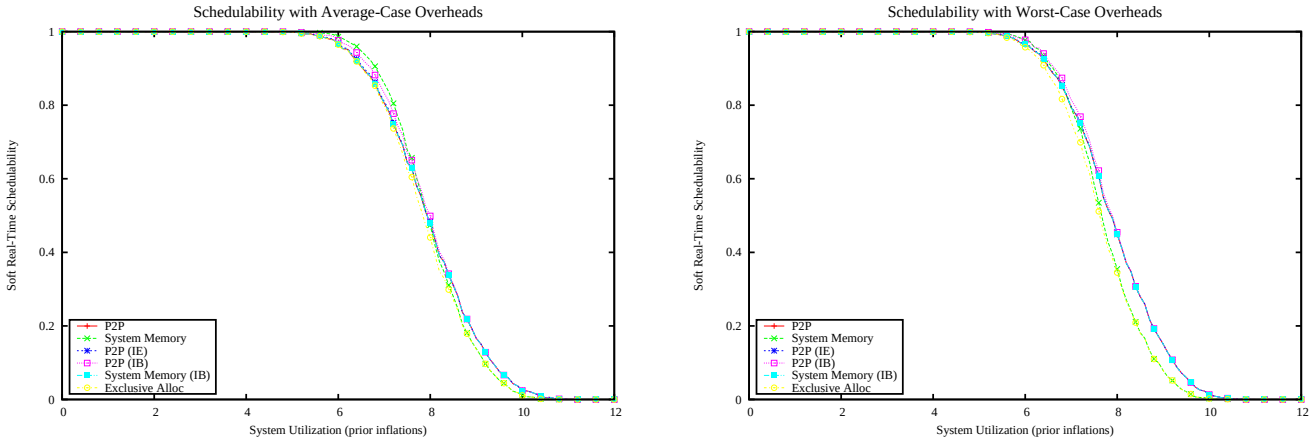

Figure 3699: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

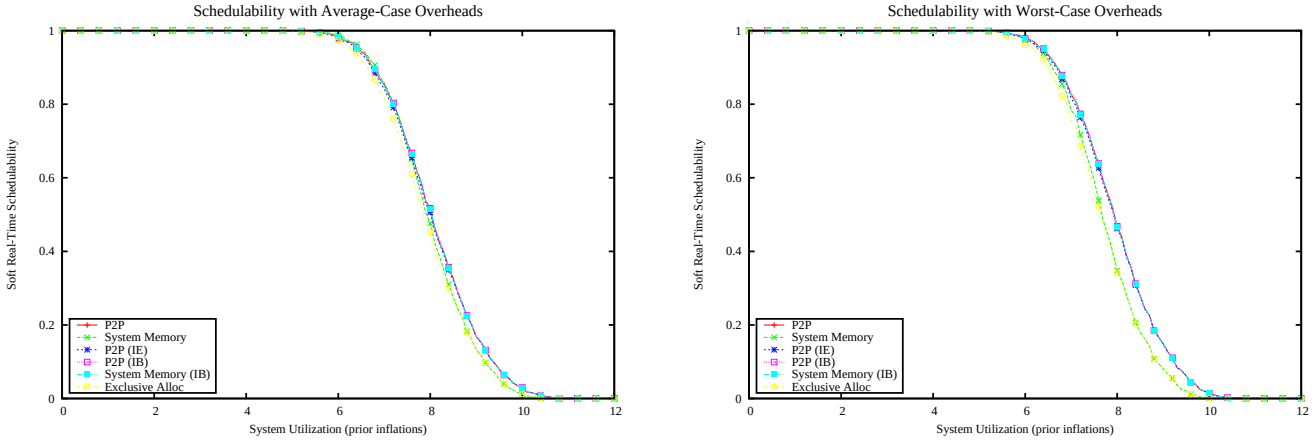

Figure 3700: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

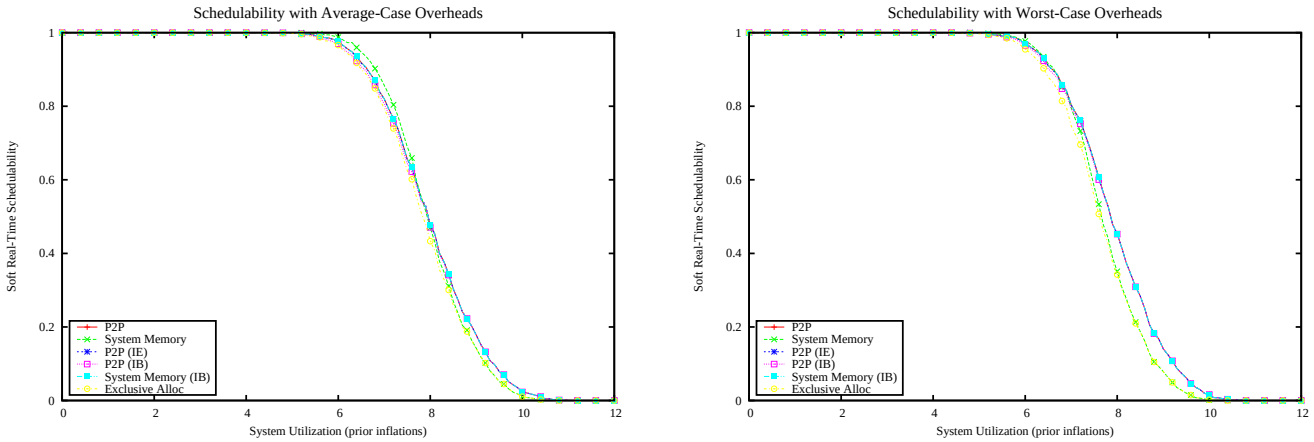

Figure 3701: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

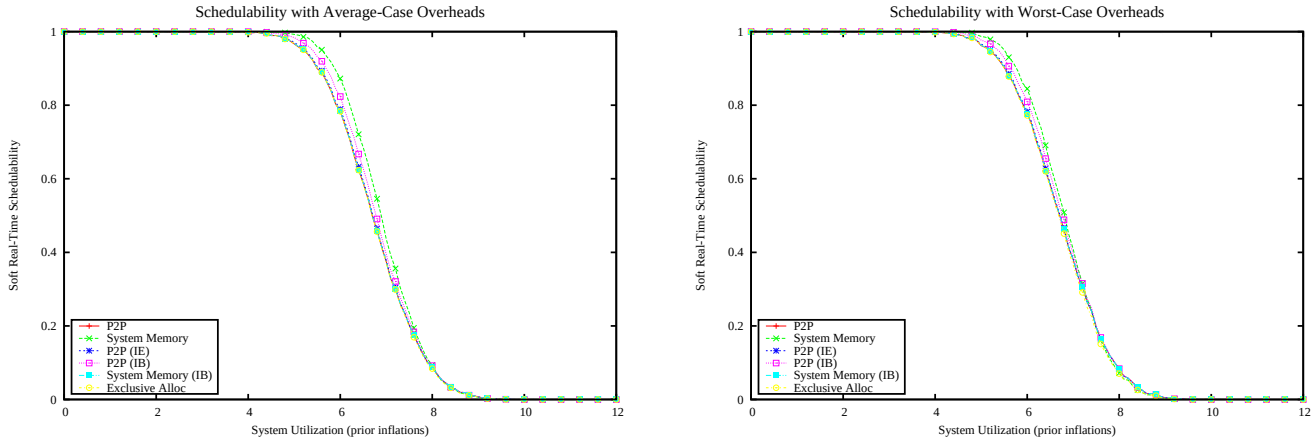

Figure 3702: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

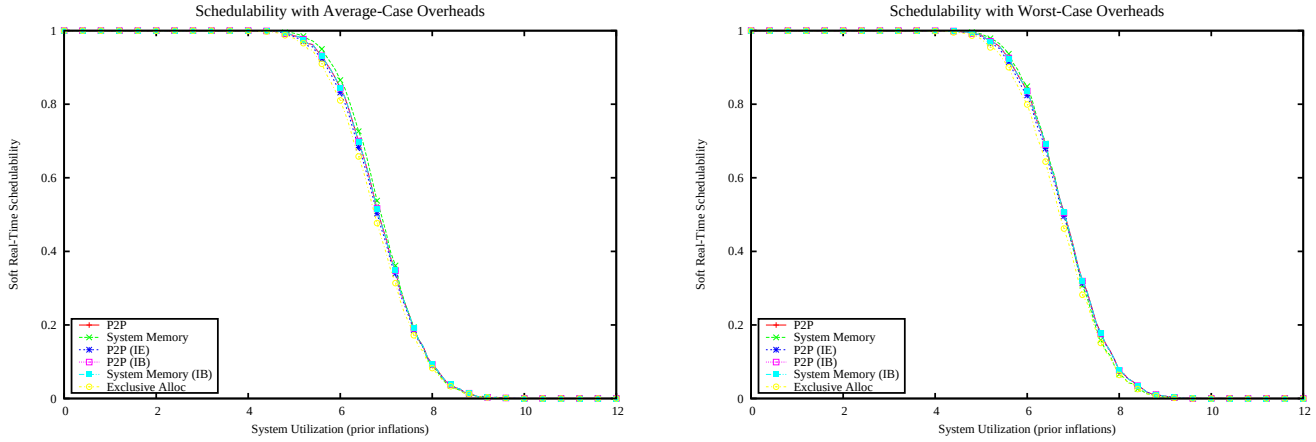

Figure 3703: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

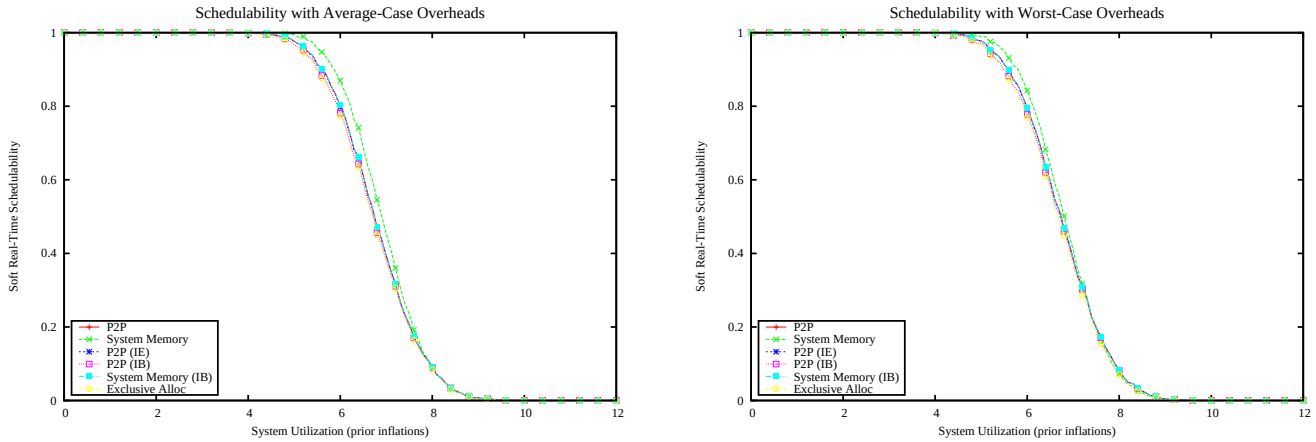

Figure 3704: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

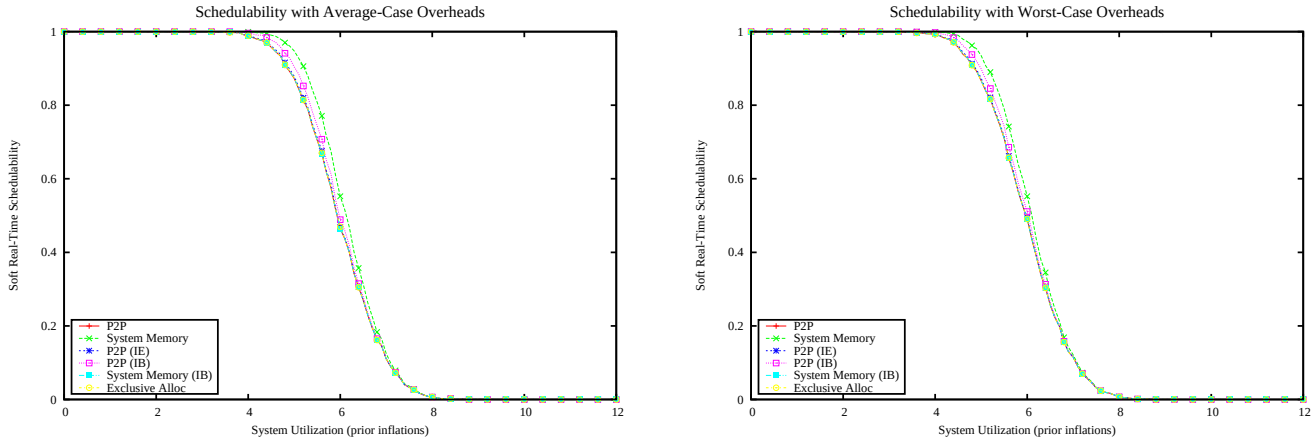

Figure 3705: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

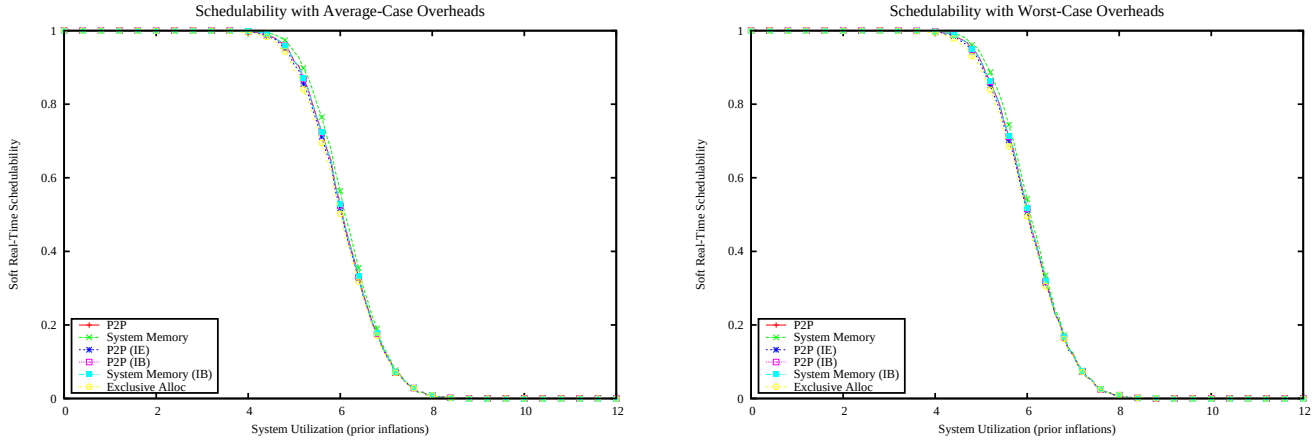

Figure 3706: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

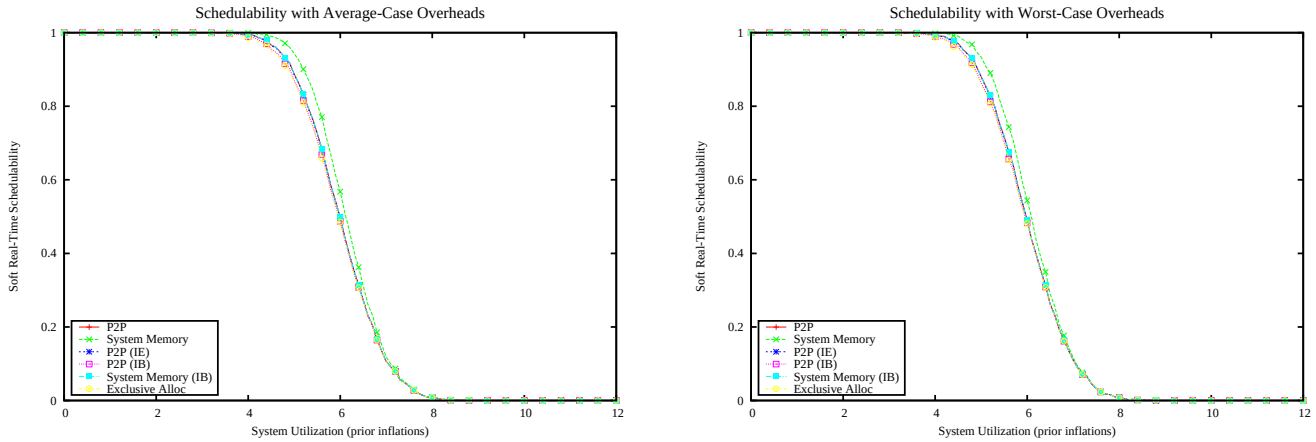

Figure 3707: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

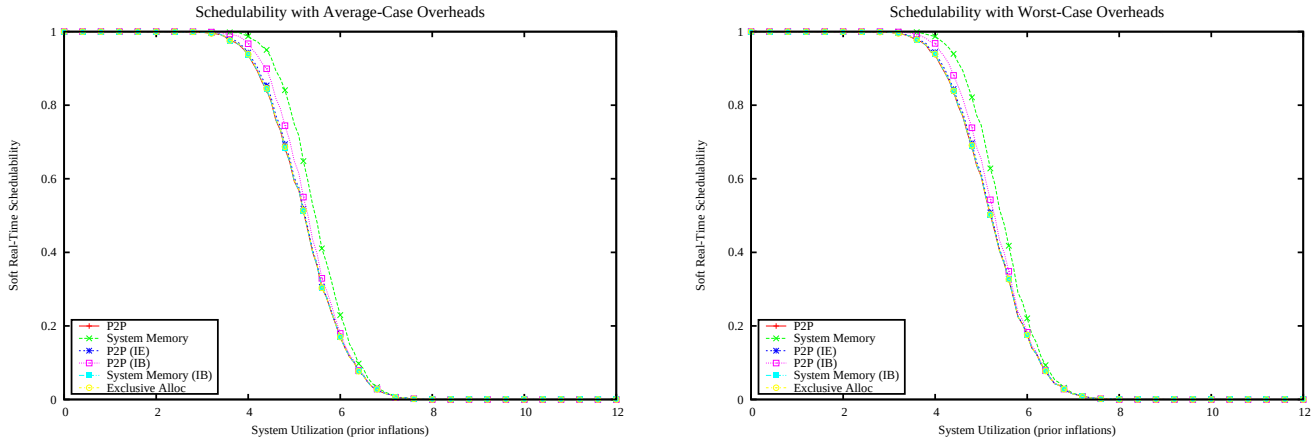

Figure 3708: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

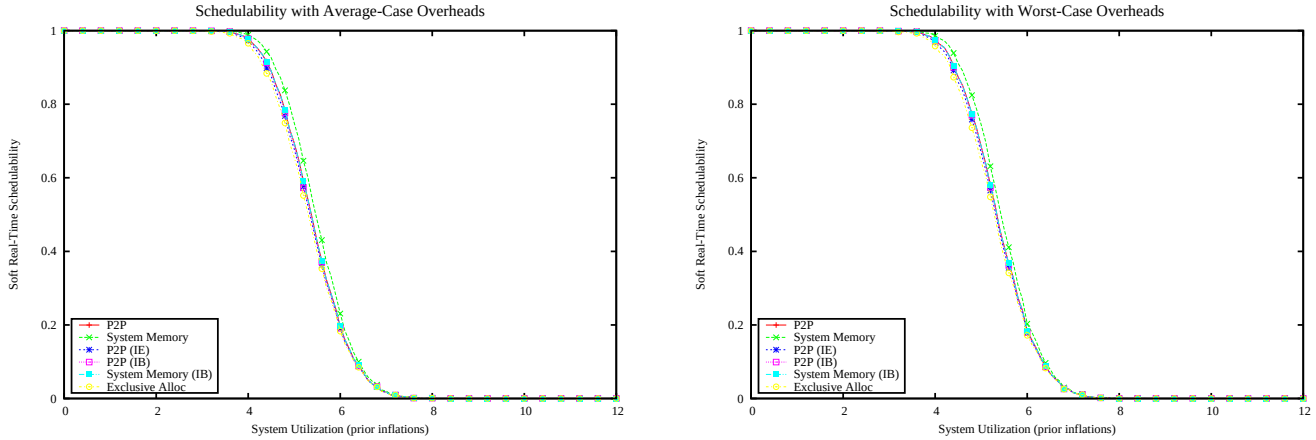

Figure 3709: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

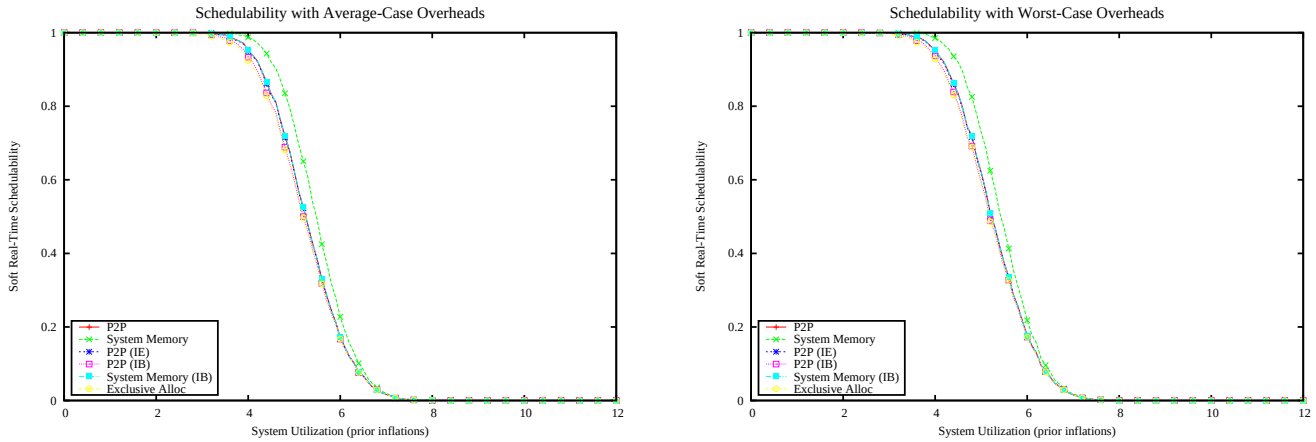

Figure 3710: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

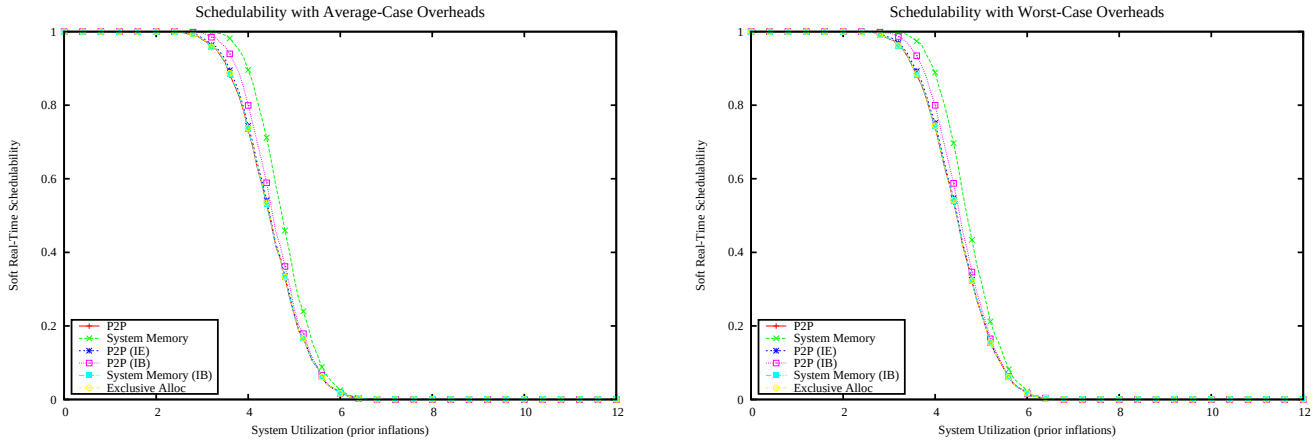

Figure 3711: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

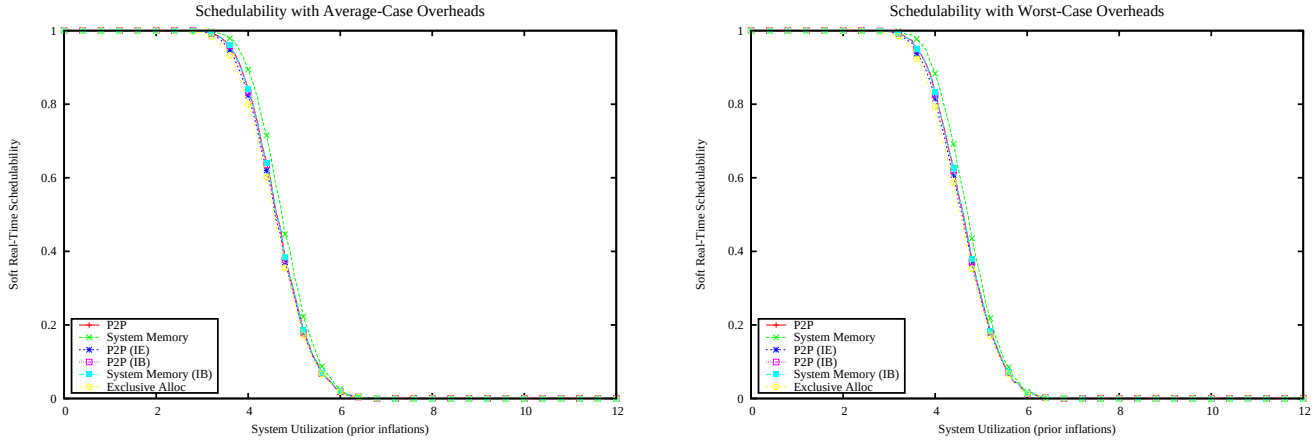

Figure 3712: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

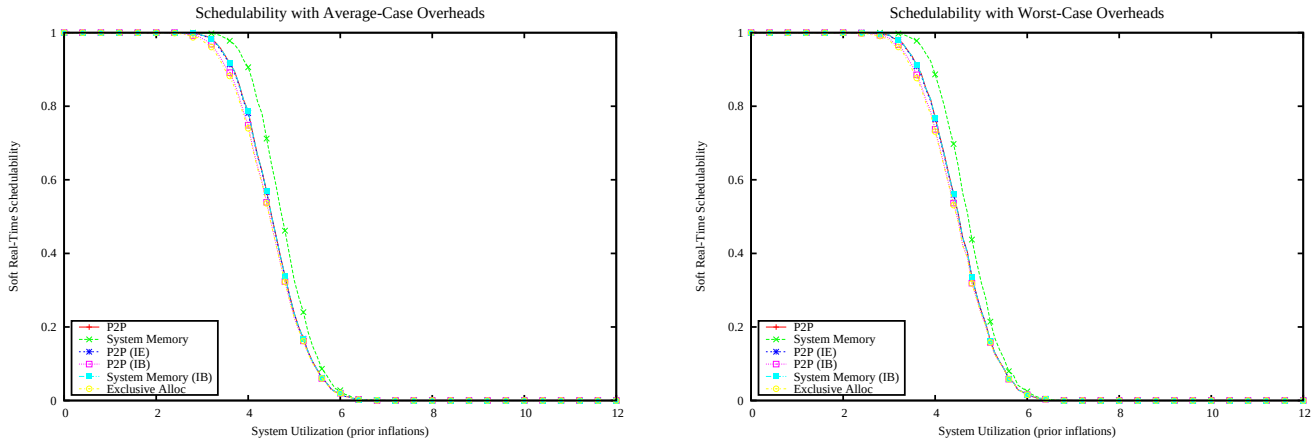

Figure 3713: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

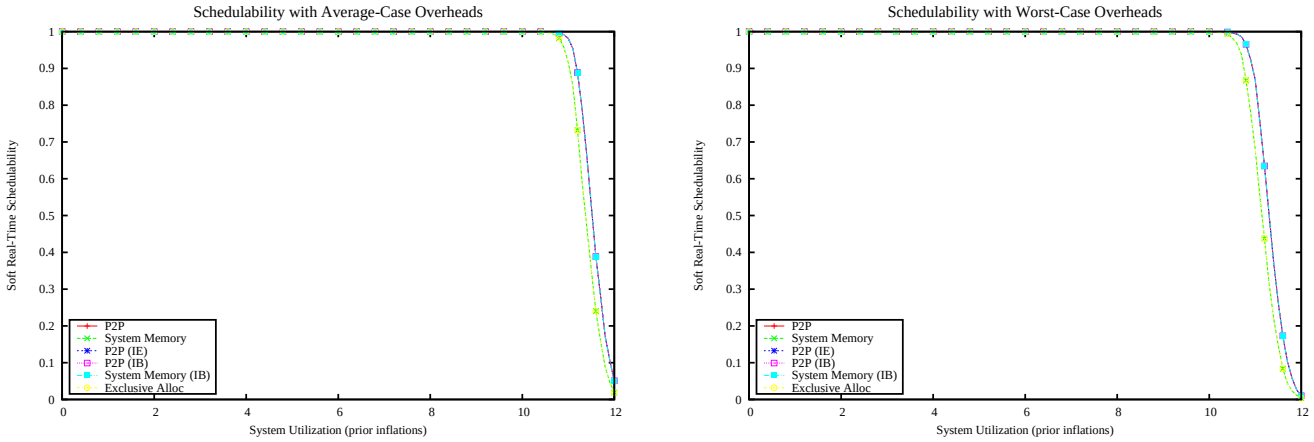

Figure 3714: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

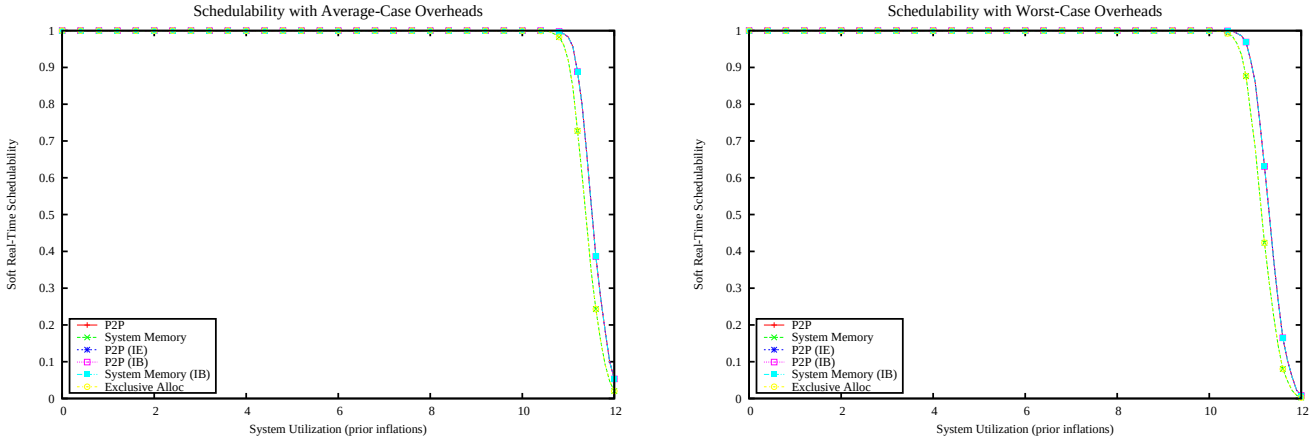

Figure 3715: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

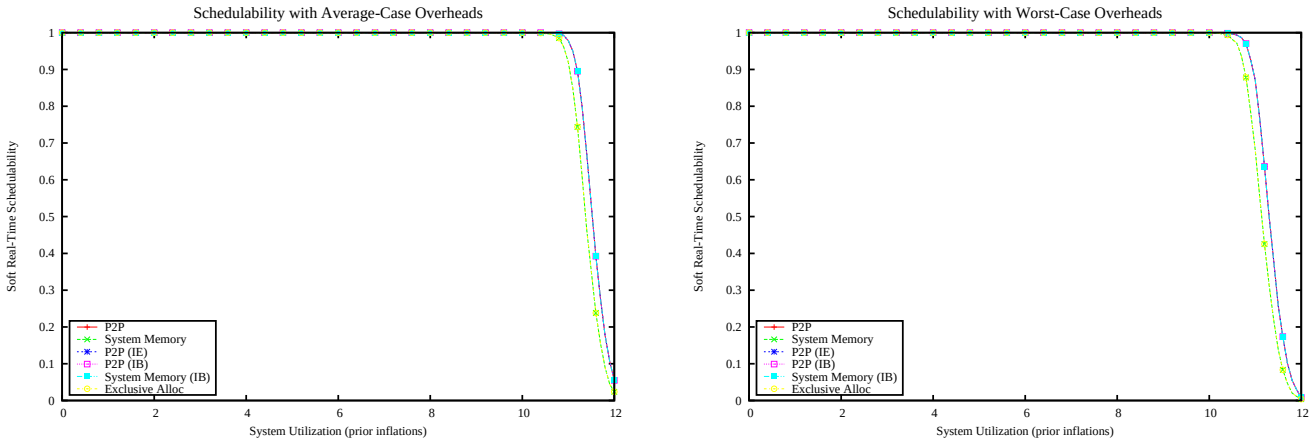

Figure 3716: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

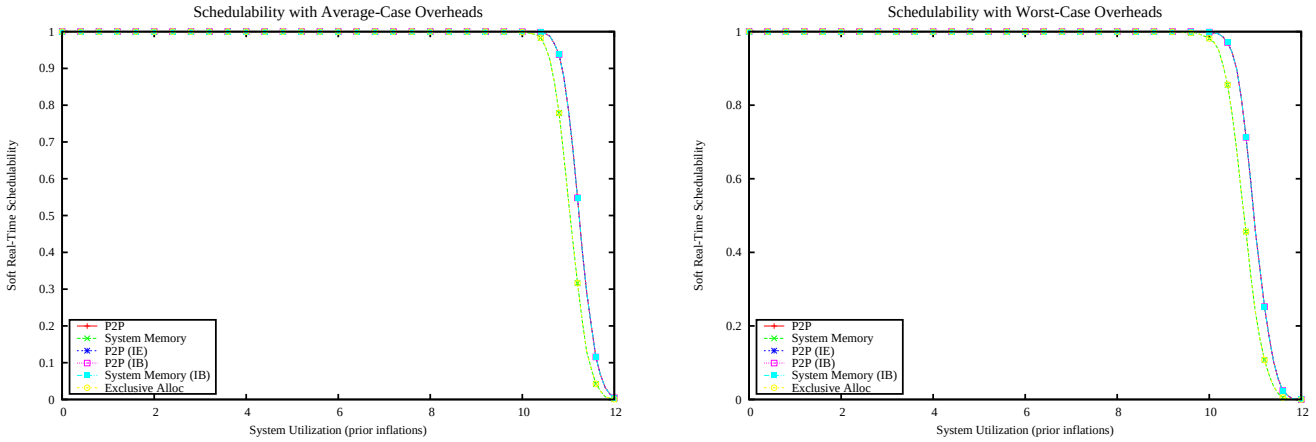

Figure 3717: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

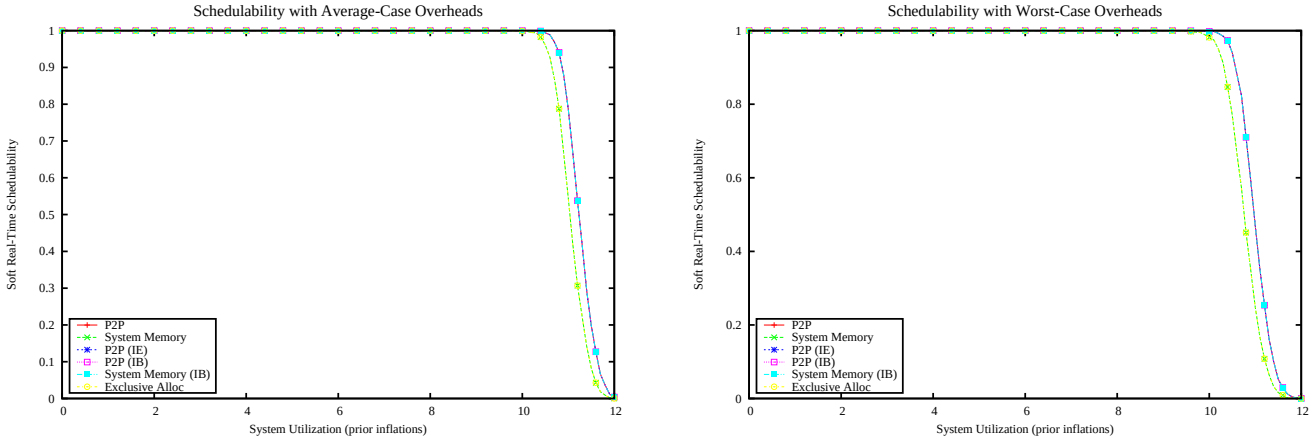

Figure 3718: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

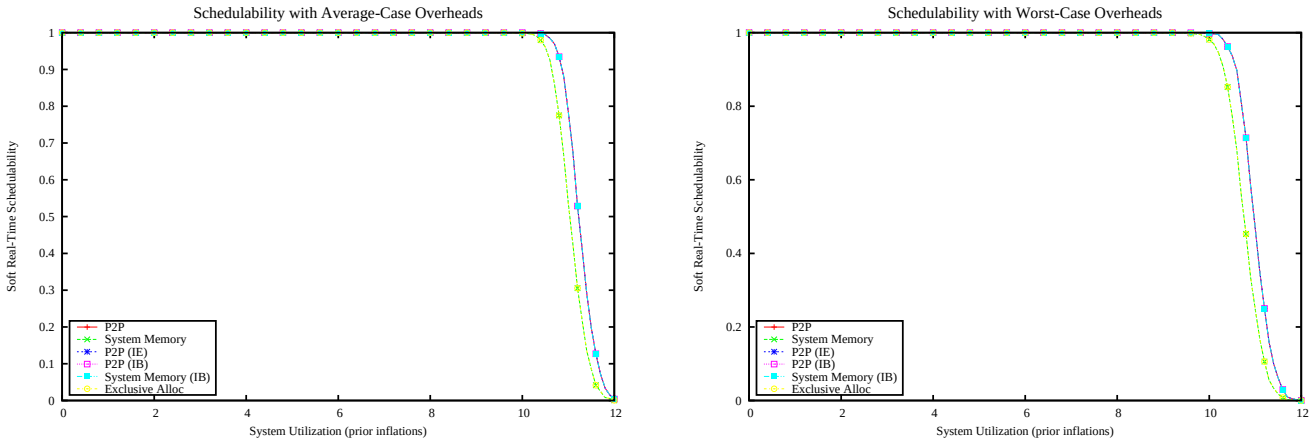

Figure 3719: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

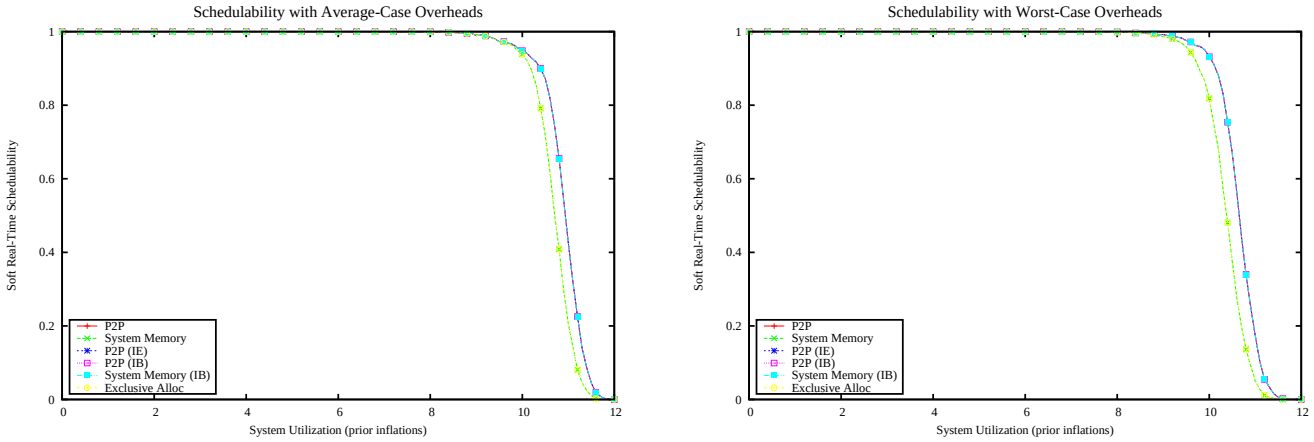

Figure 3720: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

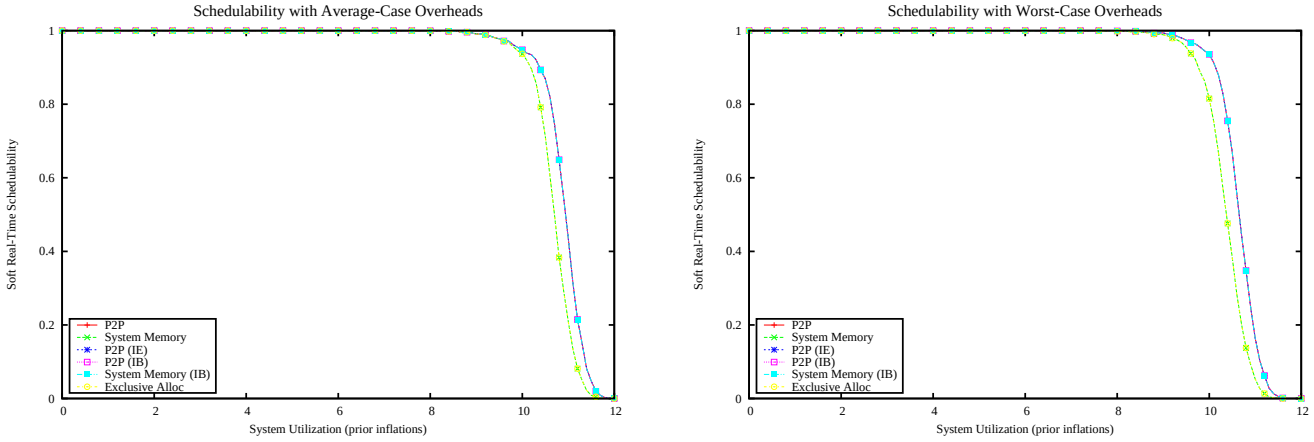

Figure 3721: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

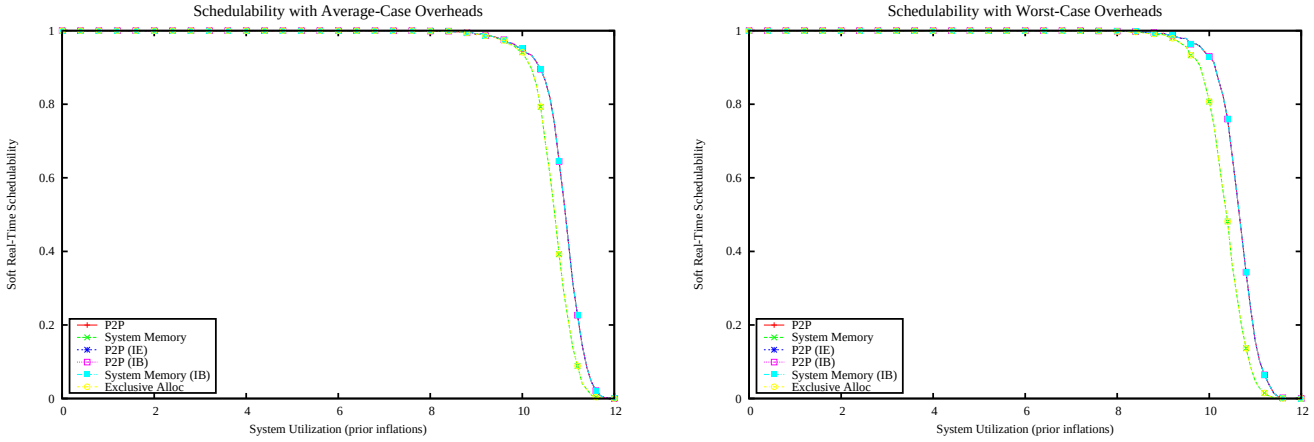

Figure 3722: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

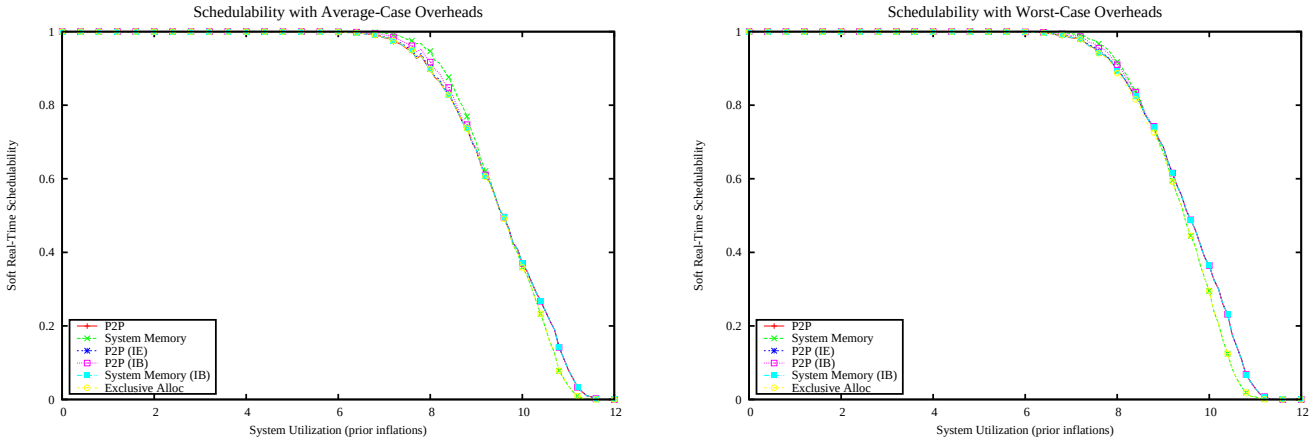

Figure 3723: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

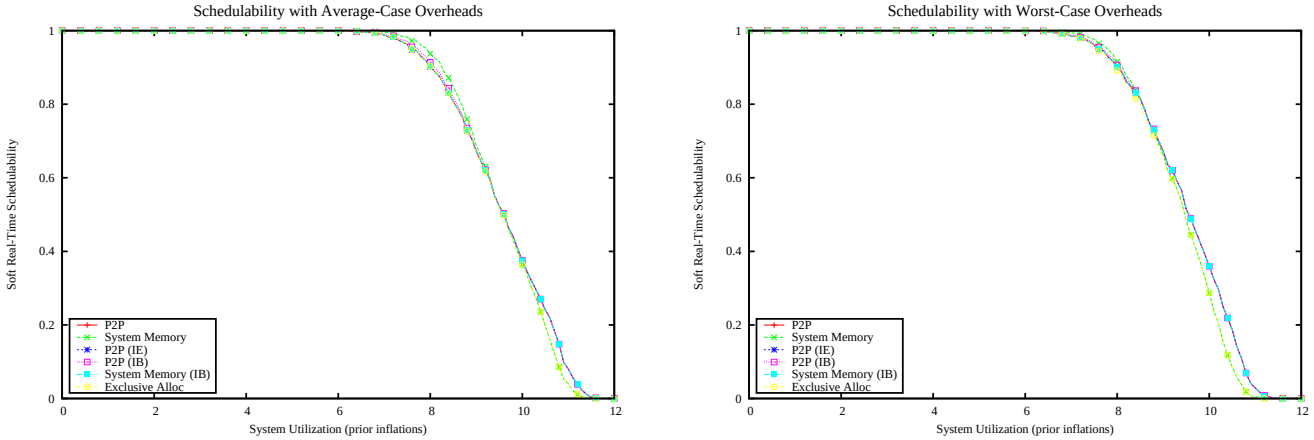

Figure 3724: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

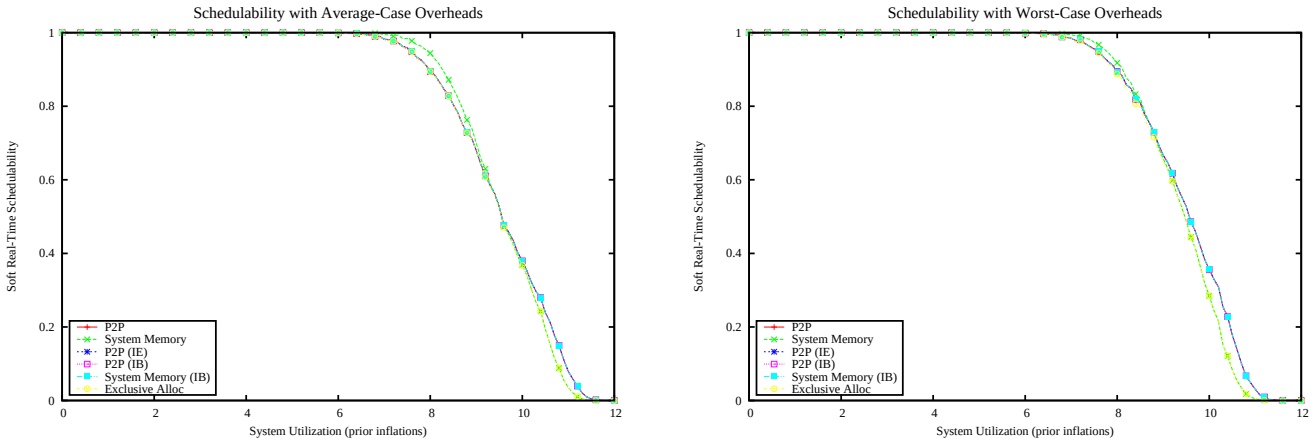

Figure 3725: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

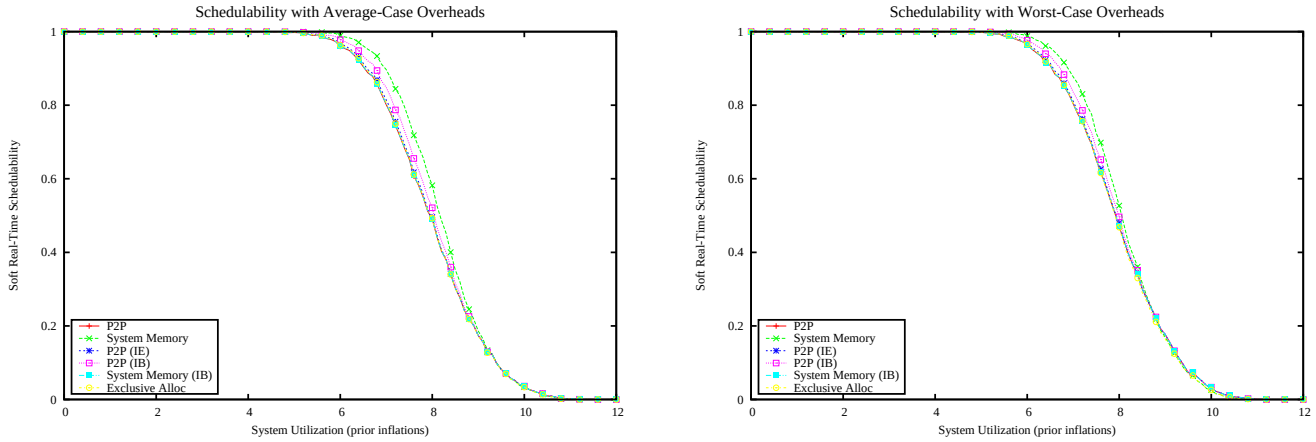

Figure 3726: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

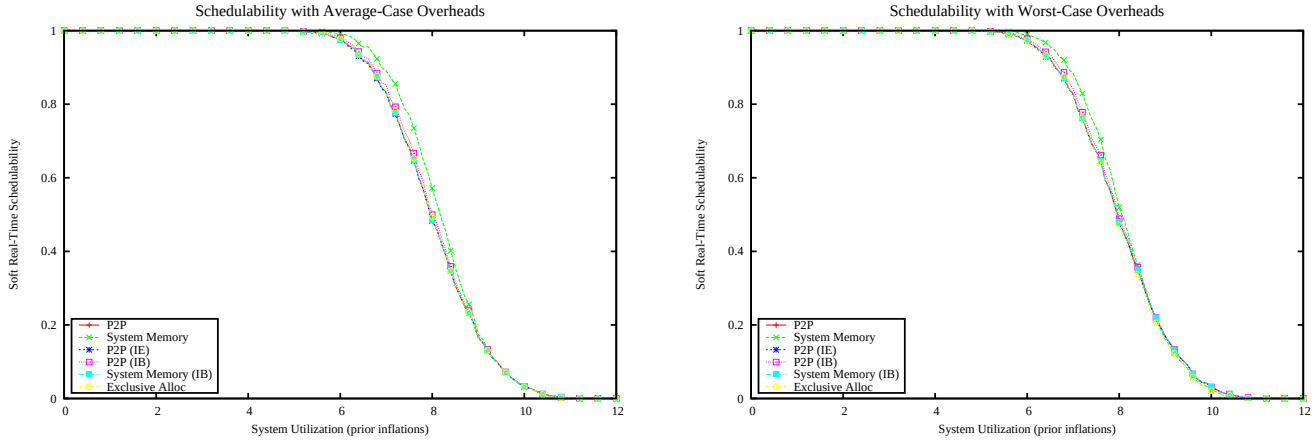

Figure 3727: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

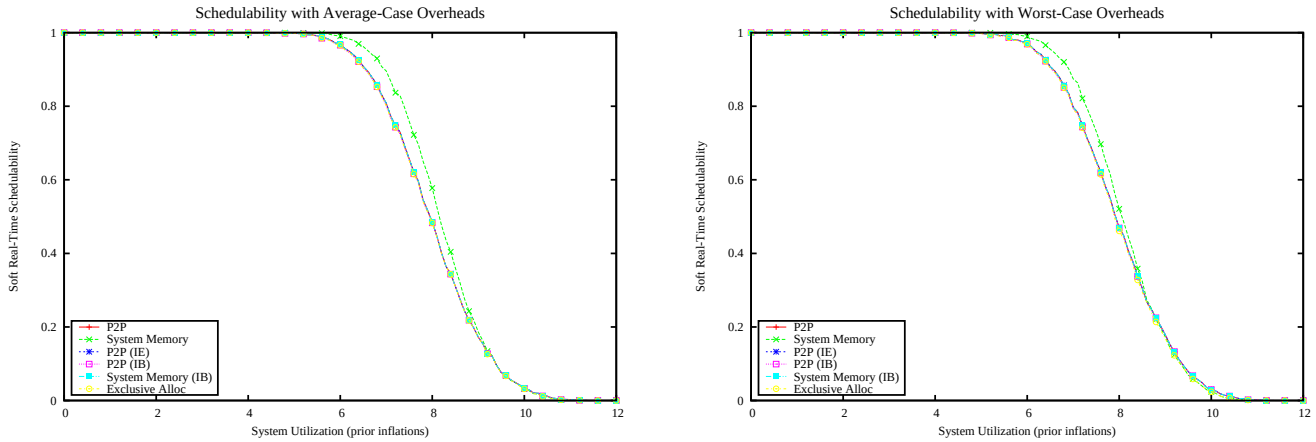

Figure 3728: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

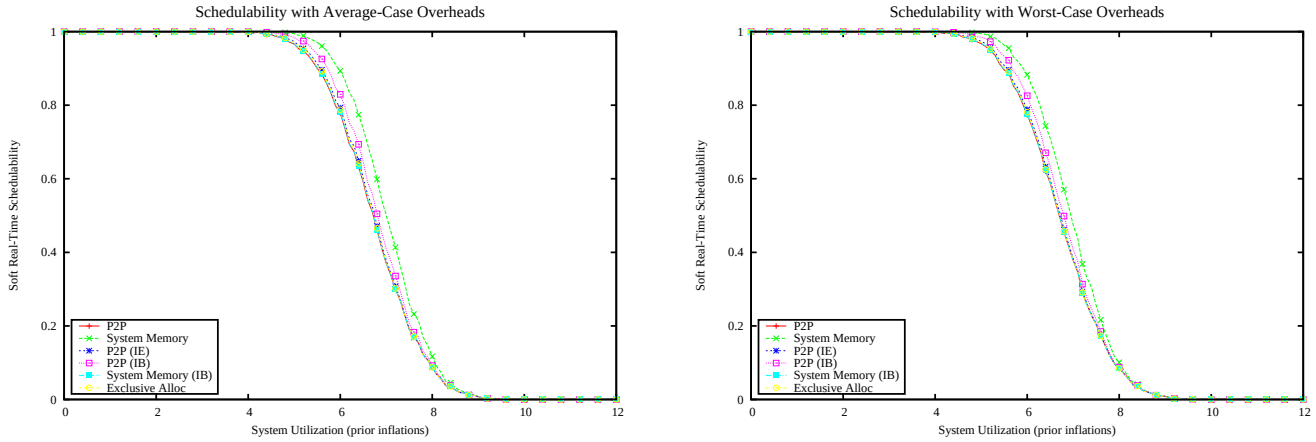

Figure 3729: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

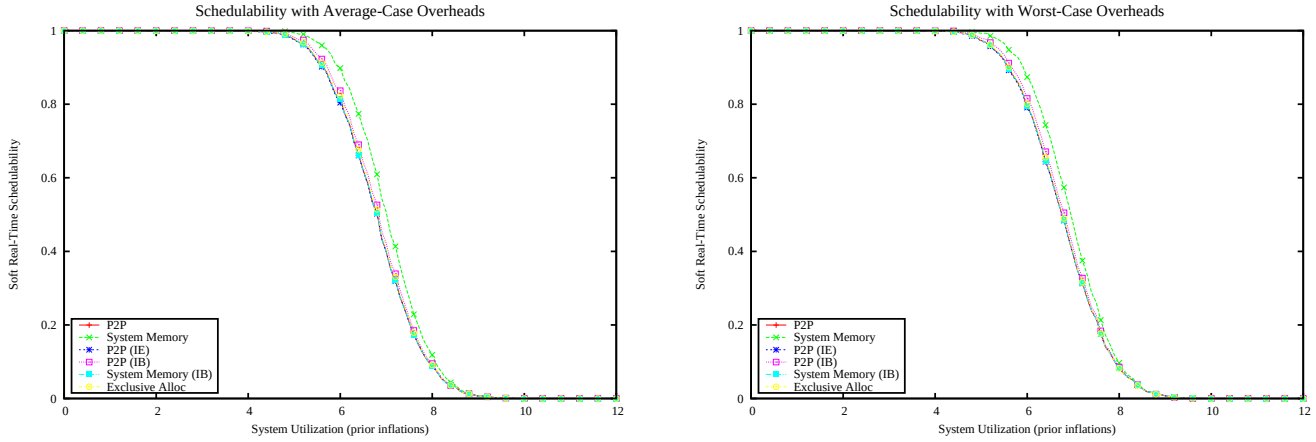

Figure 3730: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

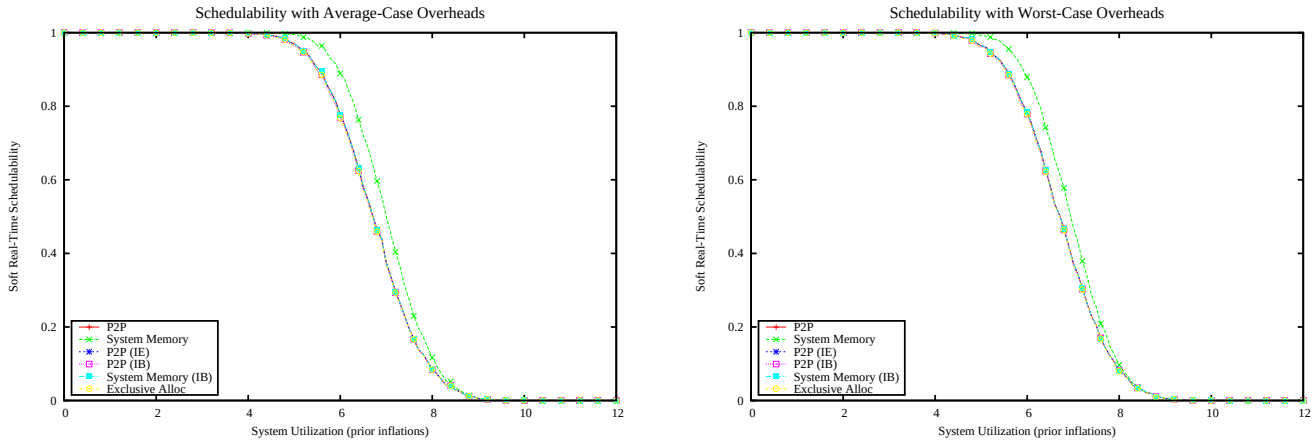

Figure 3731: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

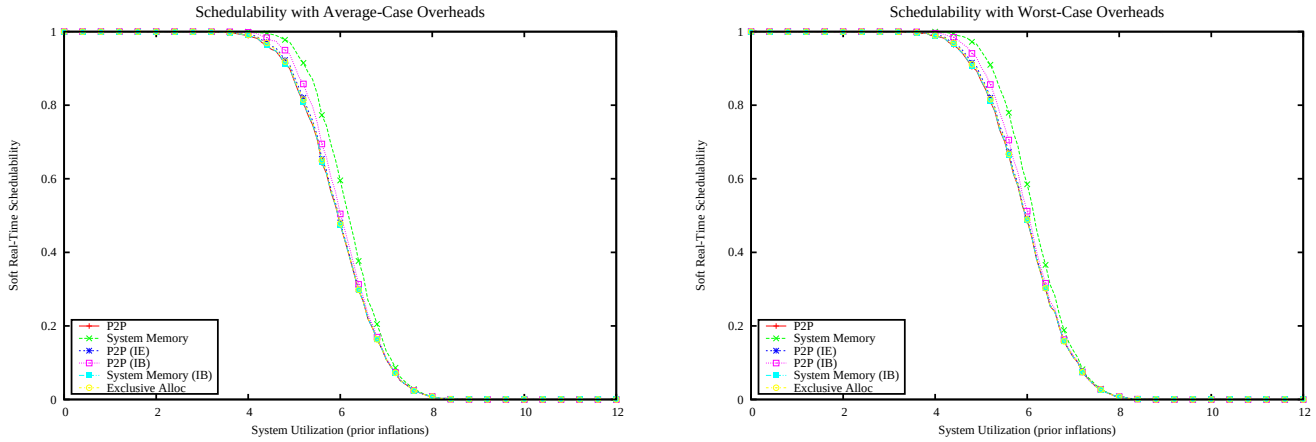

Figure 3732: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

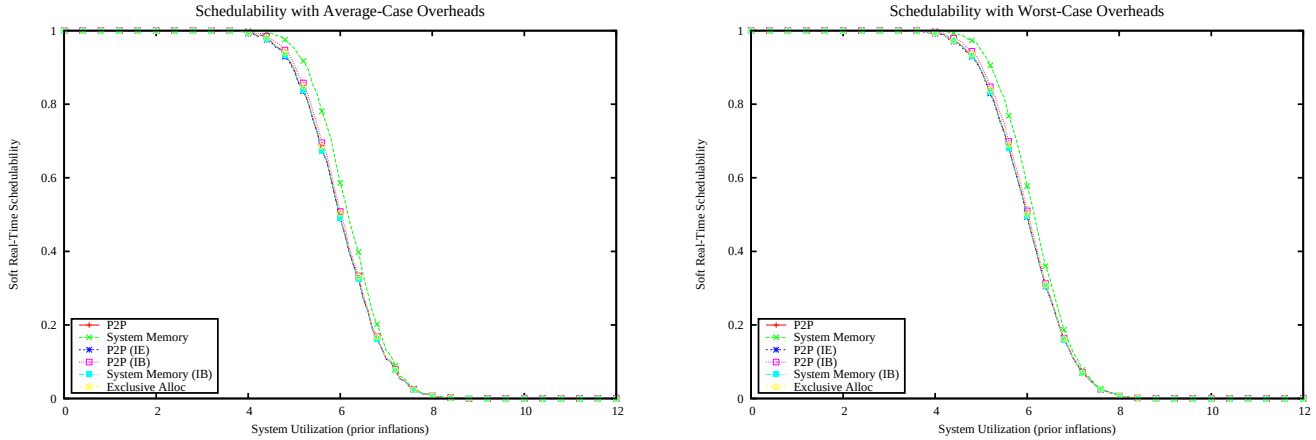

Figure 3733: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

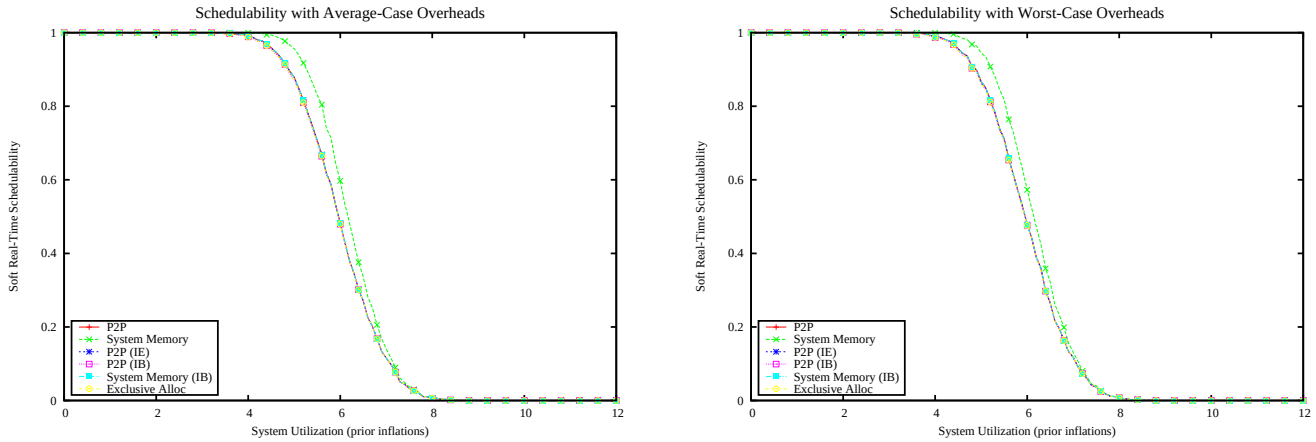

Figure 3734: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

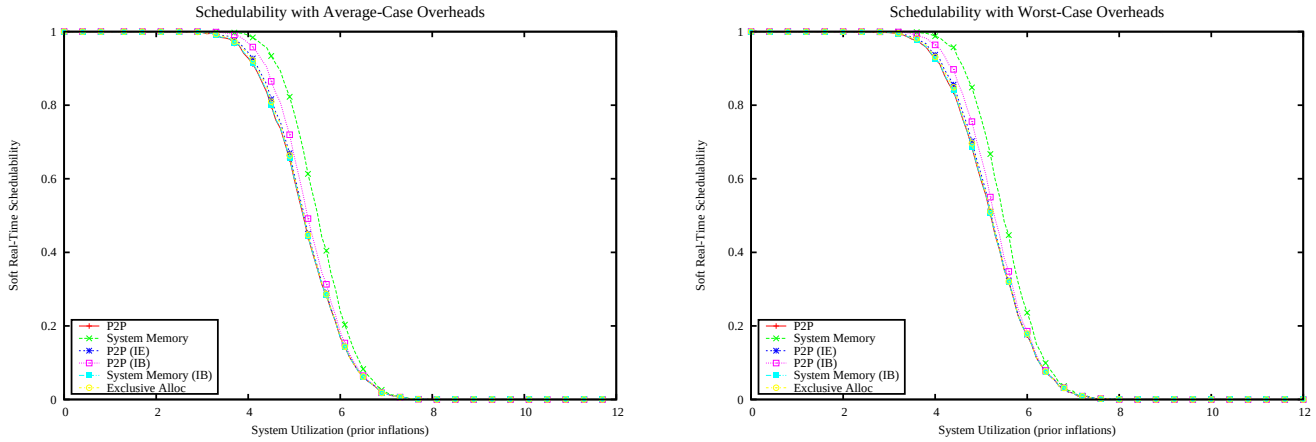

Figure 3735: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

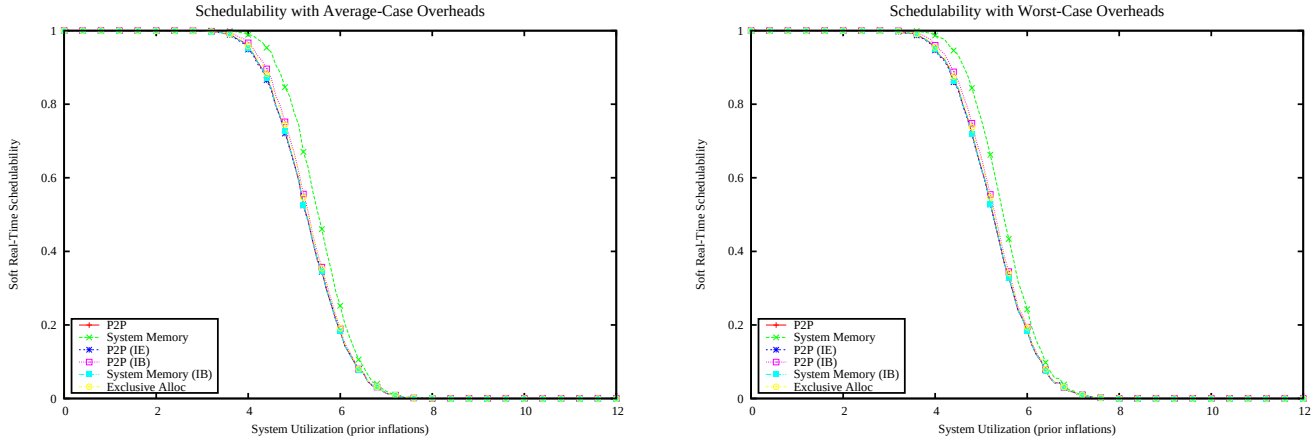

Figure 3736: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

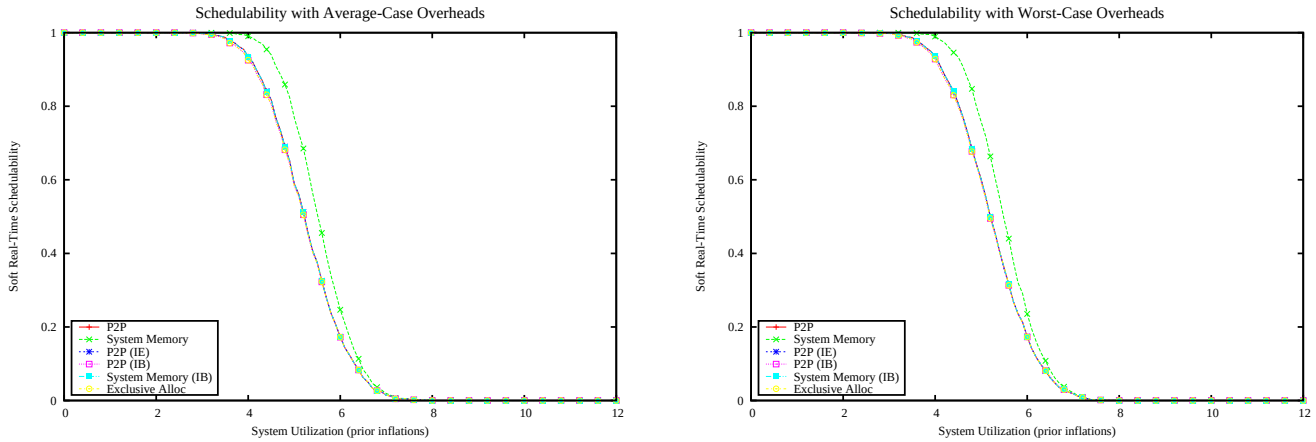

Figure 3737: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

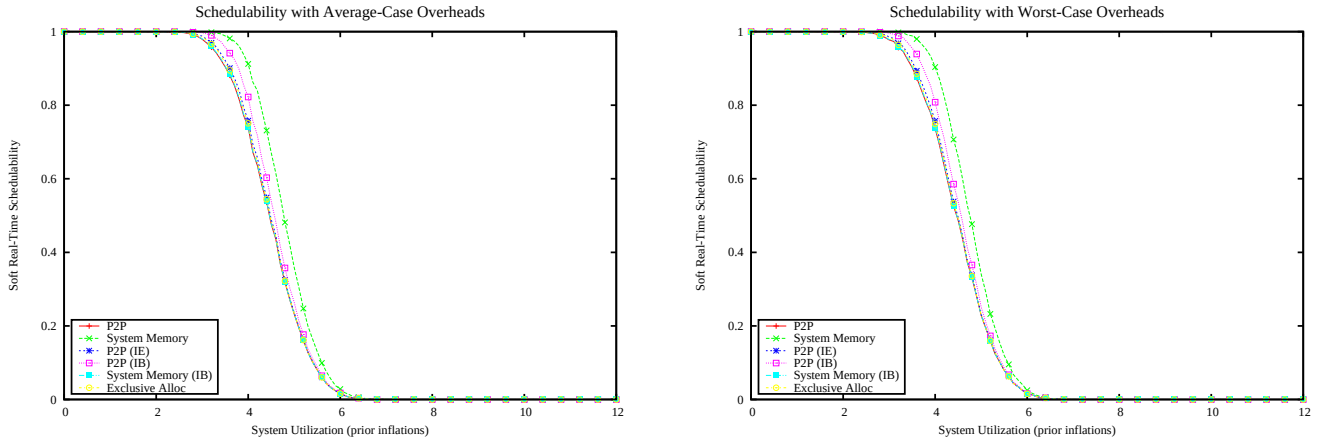

Figure 3738: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

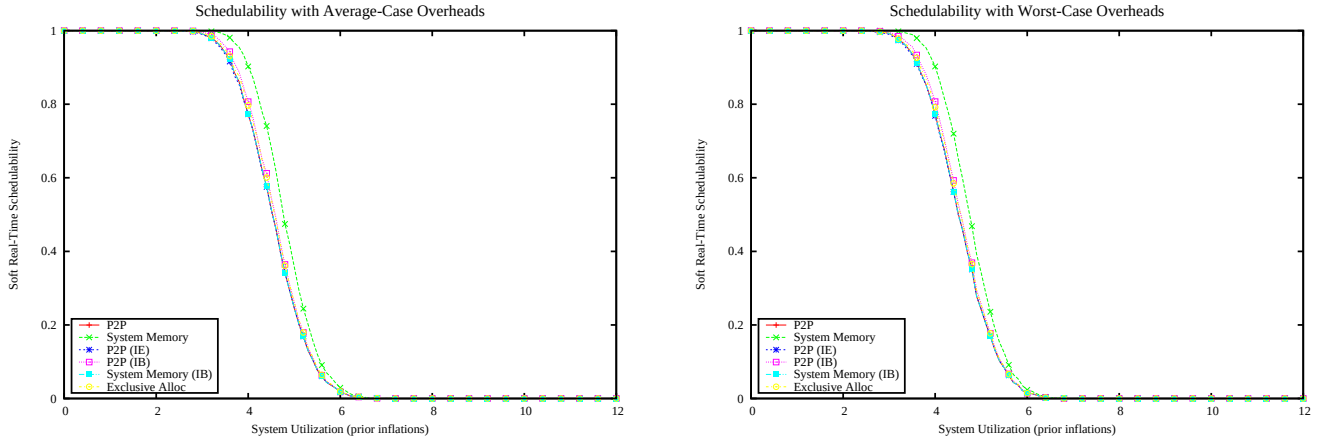

Figure 3739: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

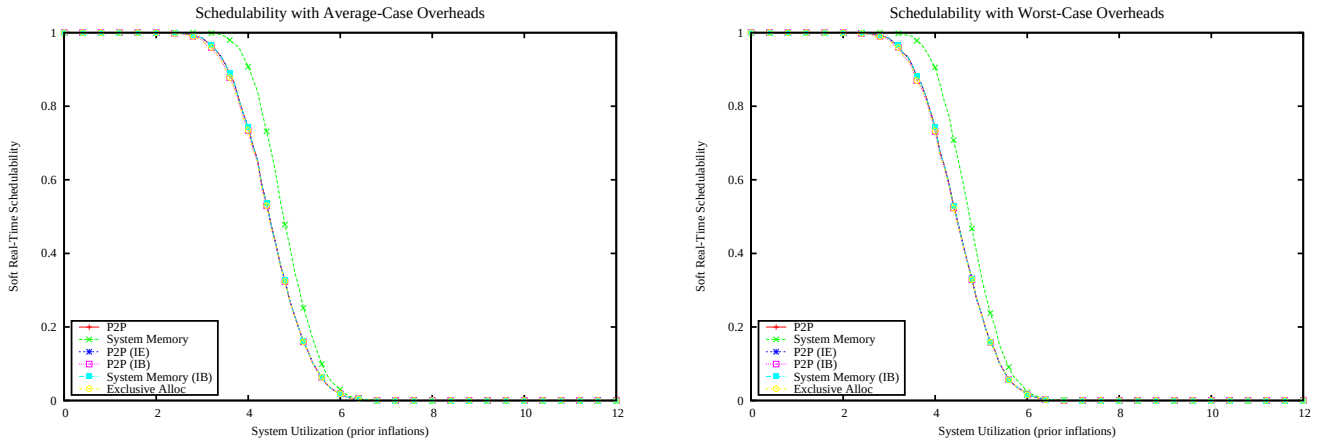

Figure 3740: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

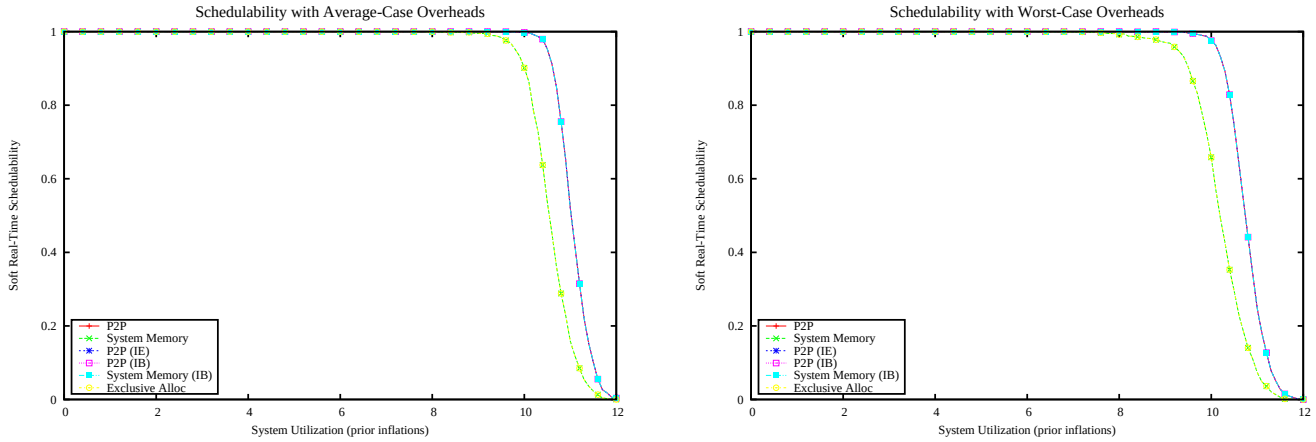

Figure 3741: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

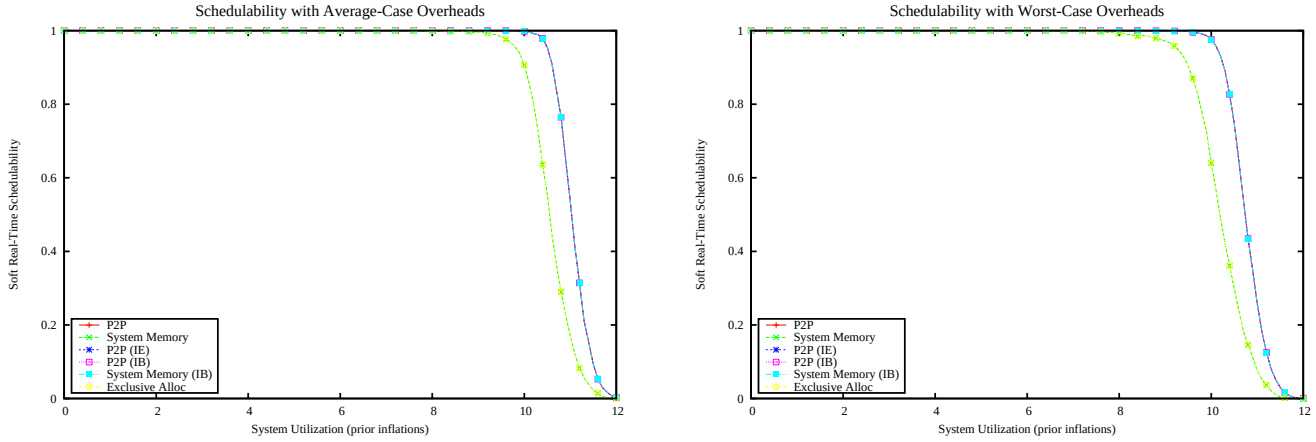

Figure 3742: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

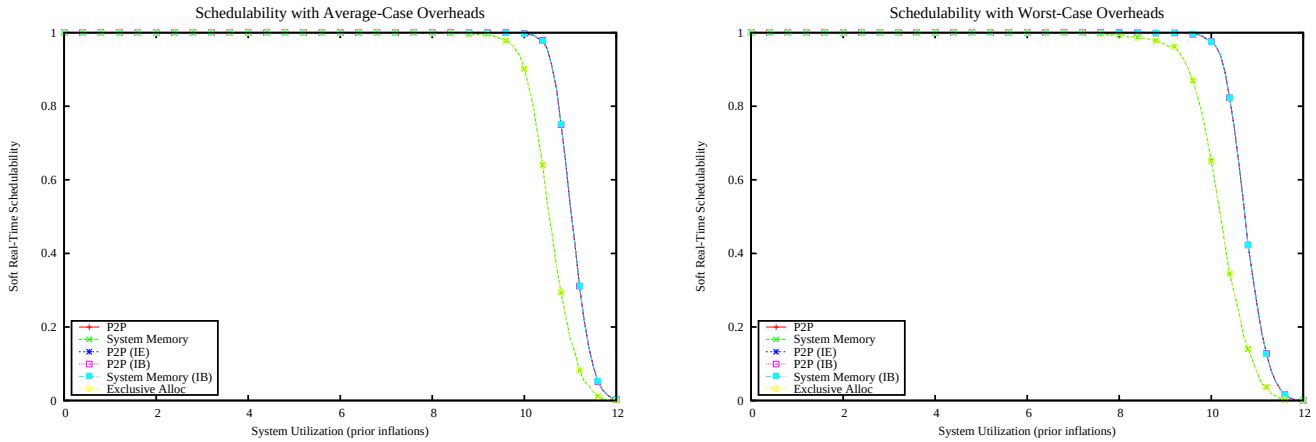

Figure 3743: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

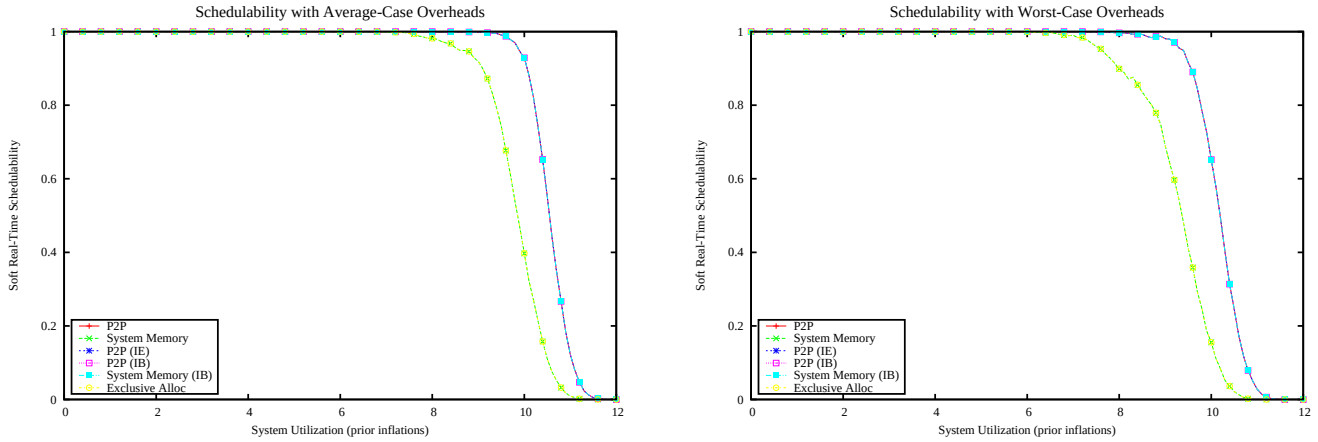

Figure 3744: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

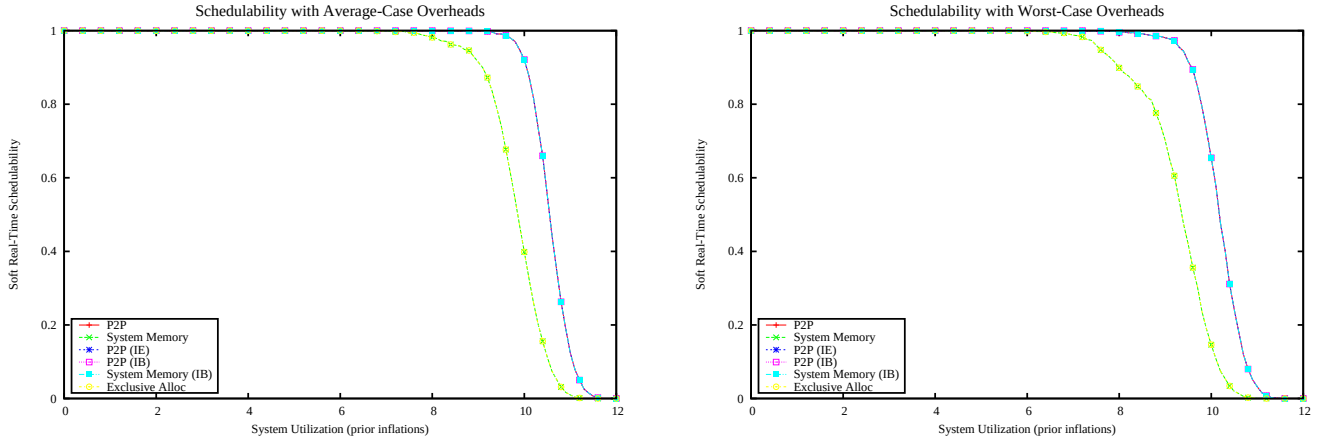

Figure 3745: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

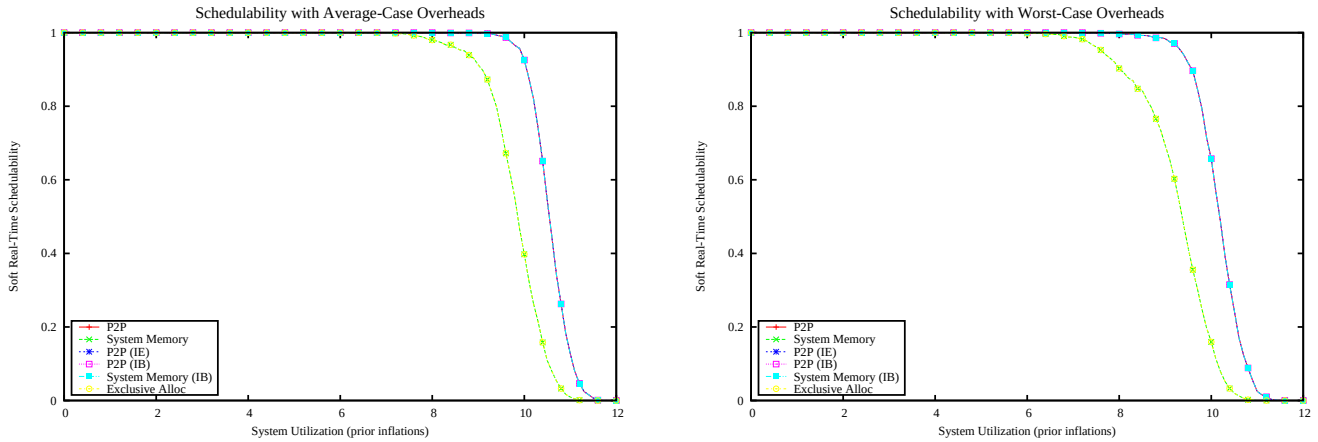

Figure 3746: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

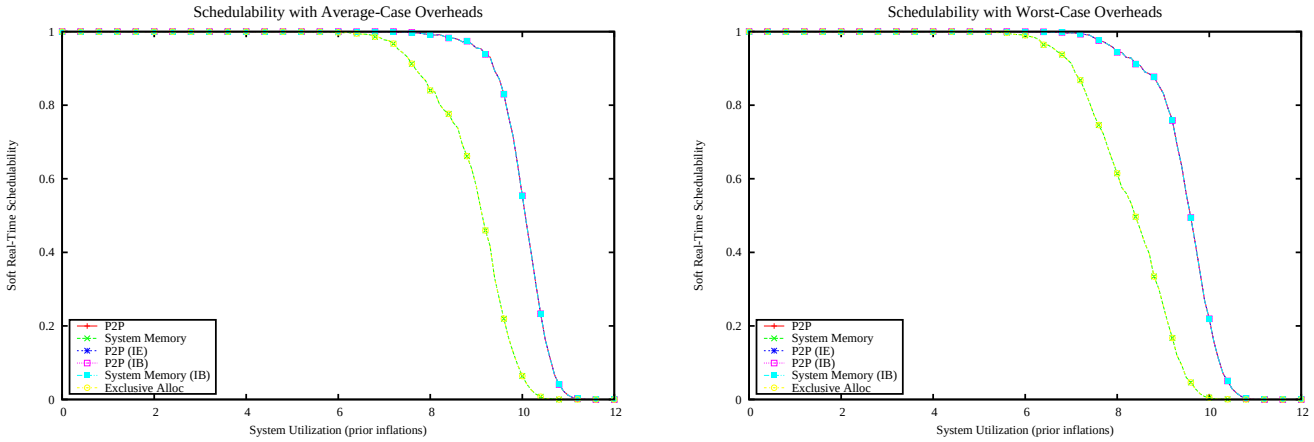

Figure 3747: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

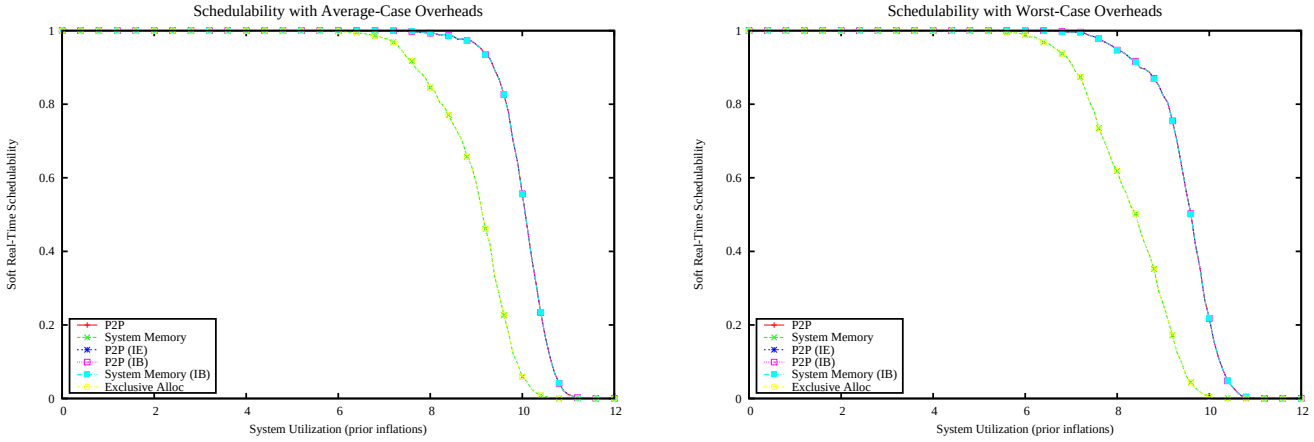

Figure 3748: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

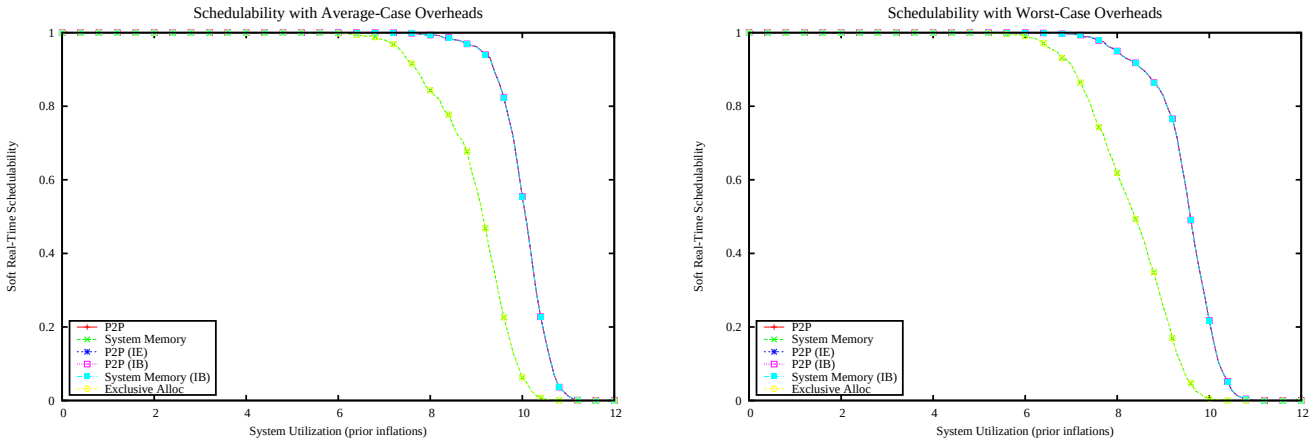

Figure 3749: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

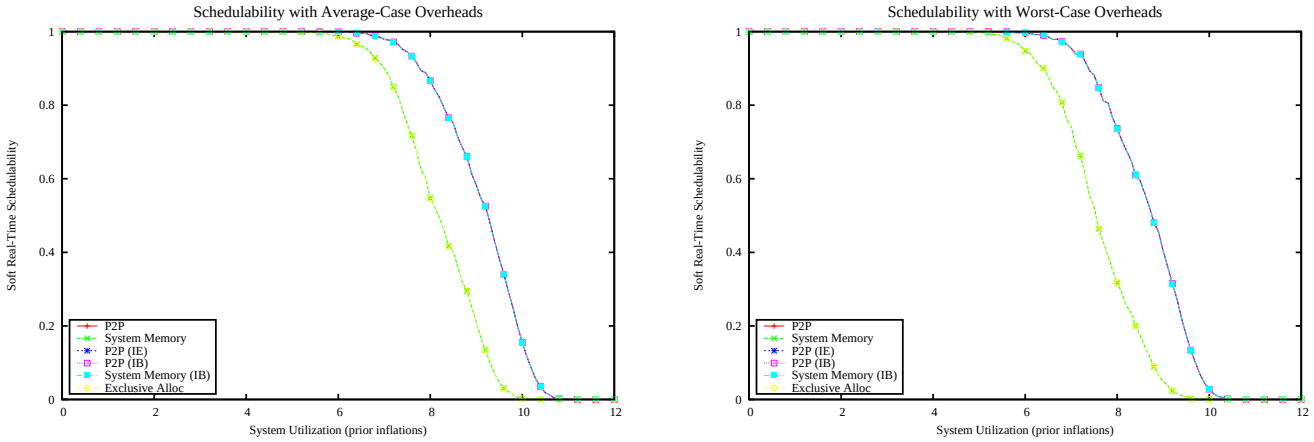

Figure 3750: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

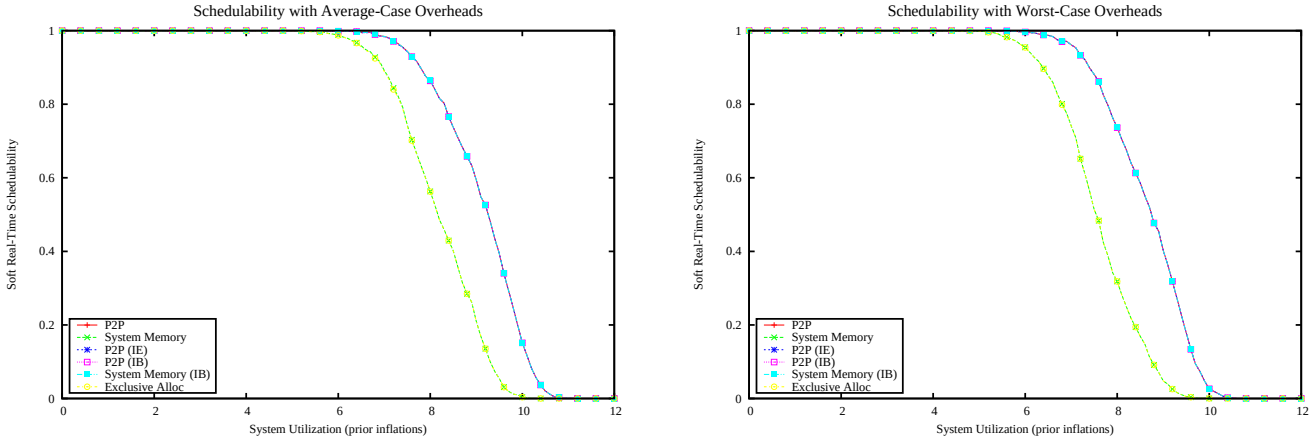

Figure 3751: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

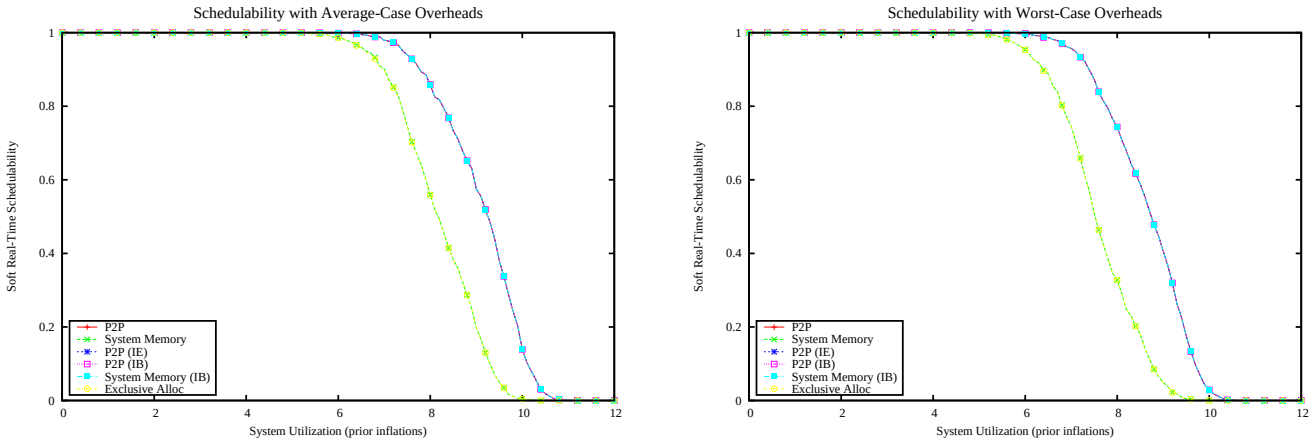

Figure 3752: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

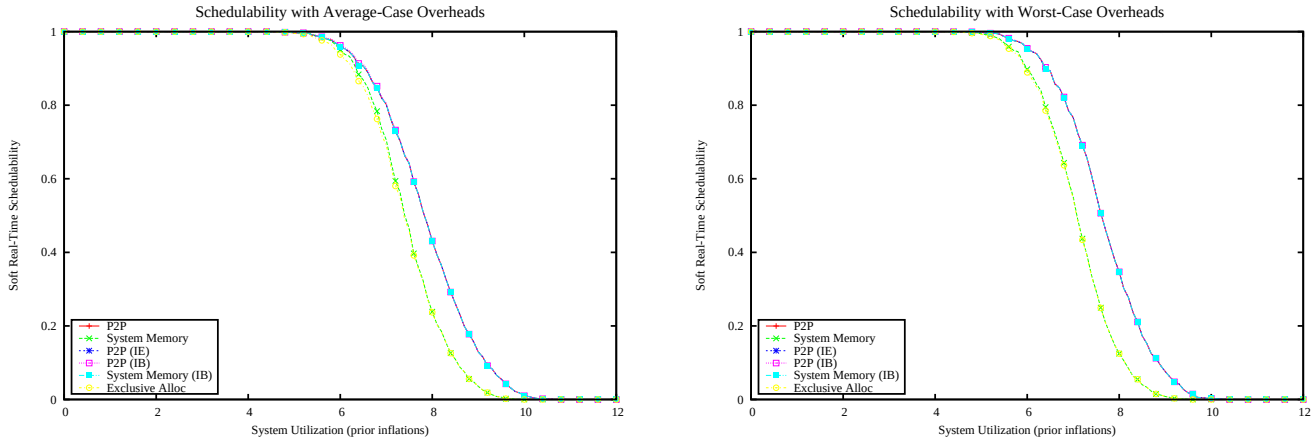

Figure 3753: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

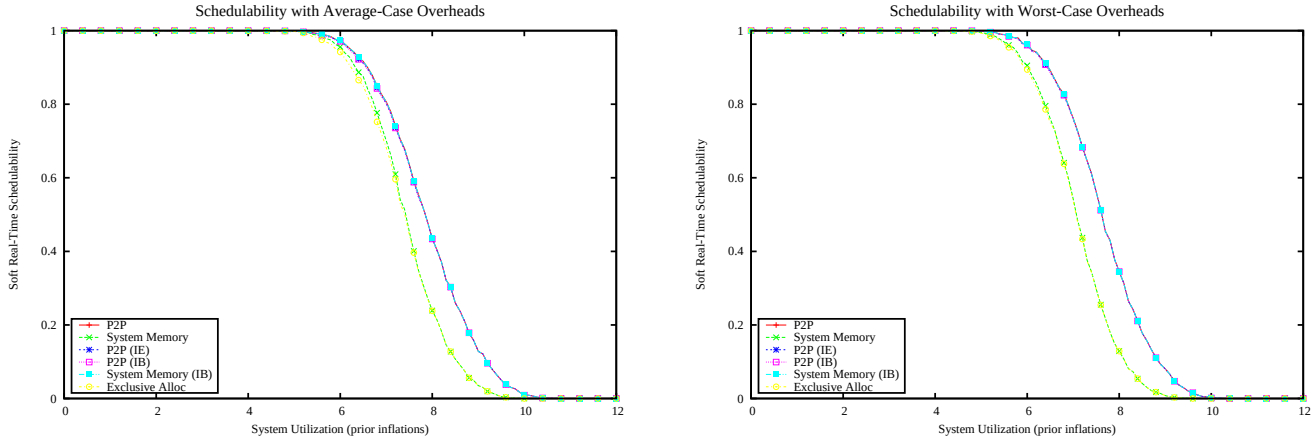

Figure 3754: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

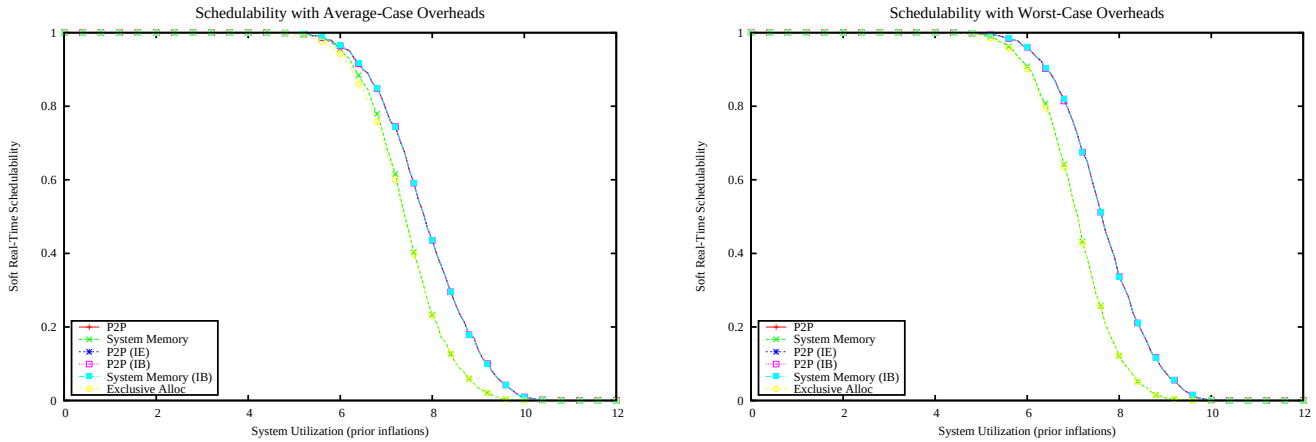

Figure 3755: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

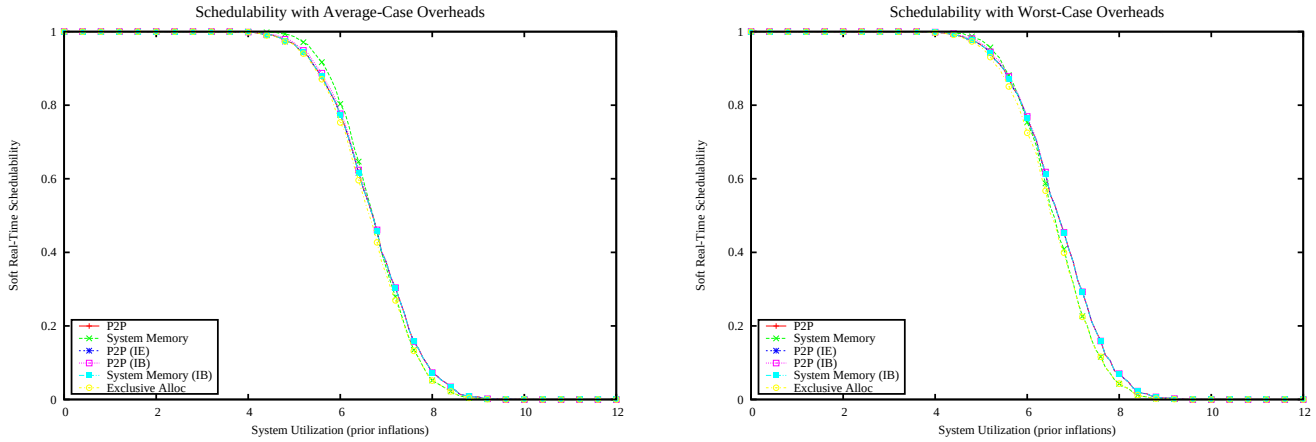

Figure 3756: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

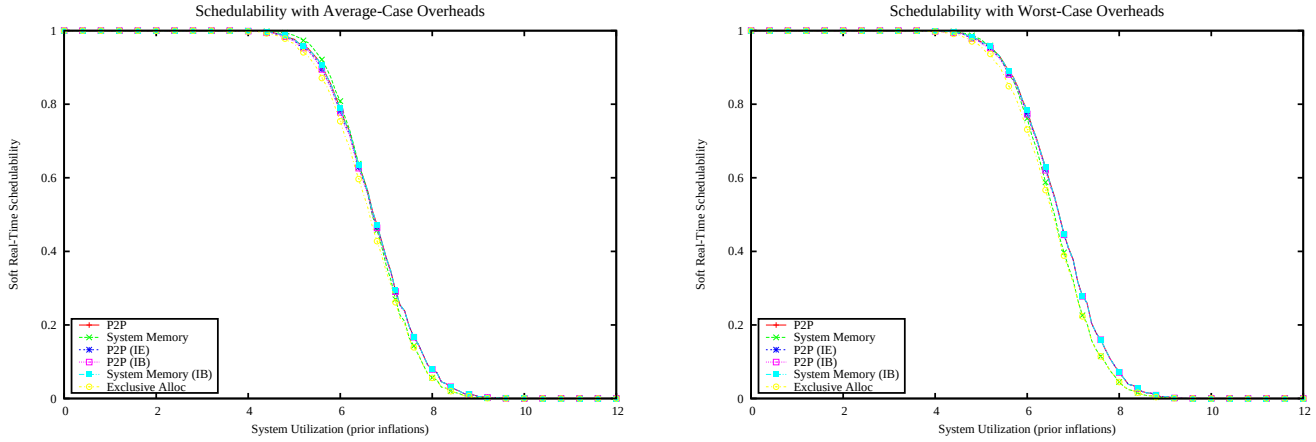

Figure 3757: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

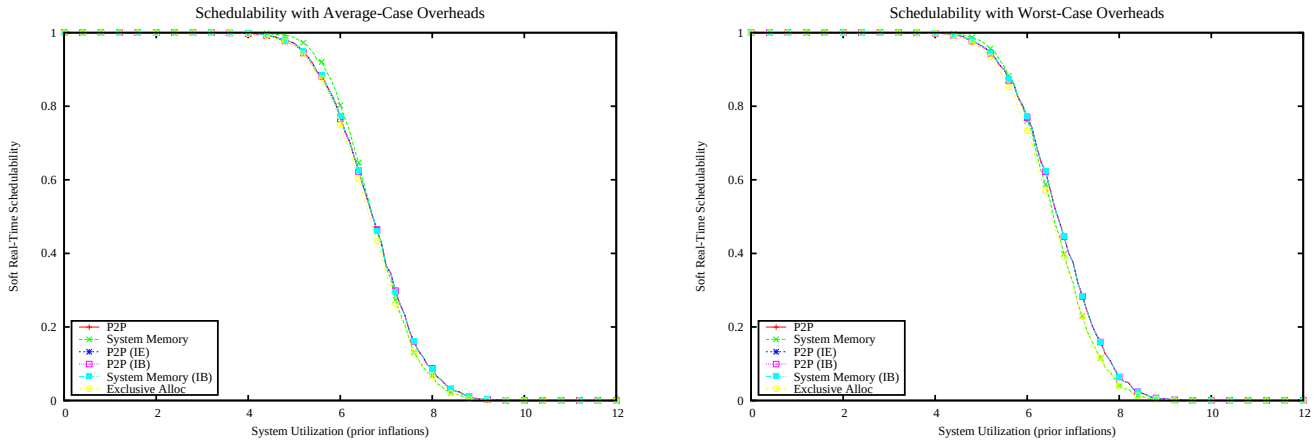

Figure 3758: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

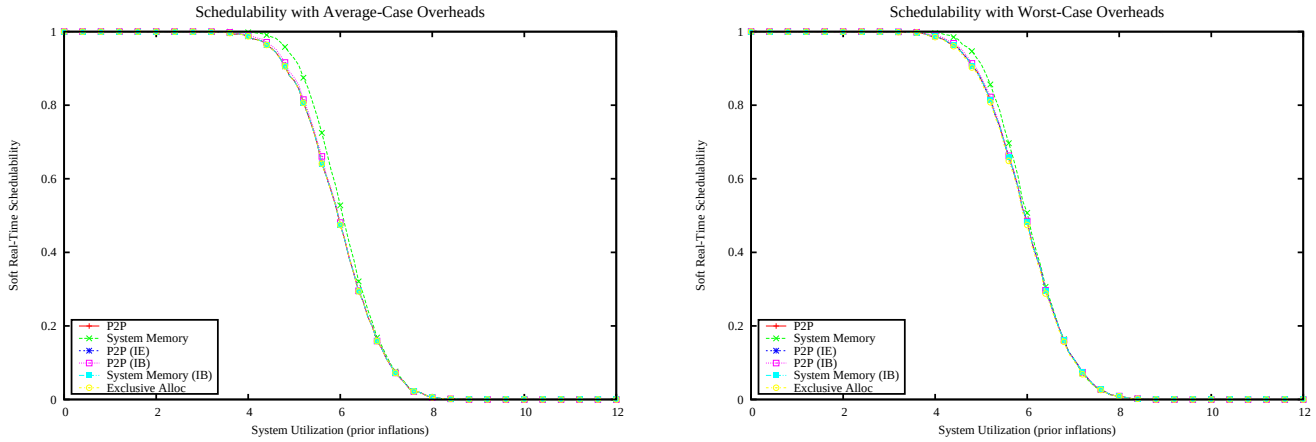

Figure 3759: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

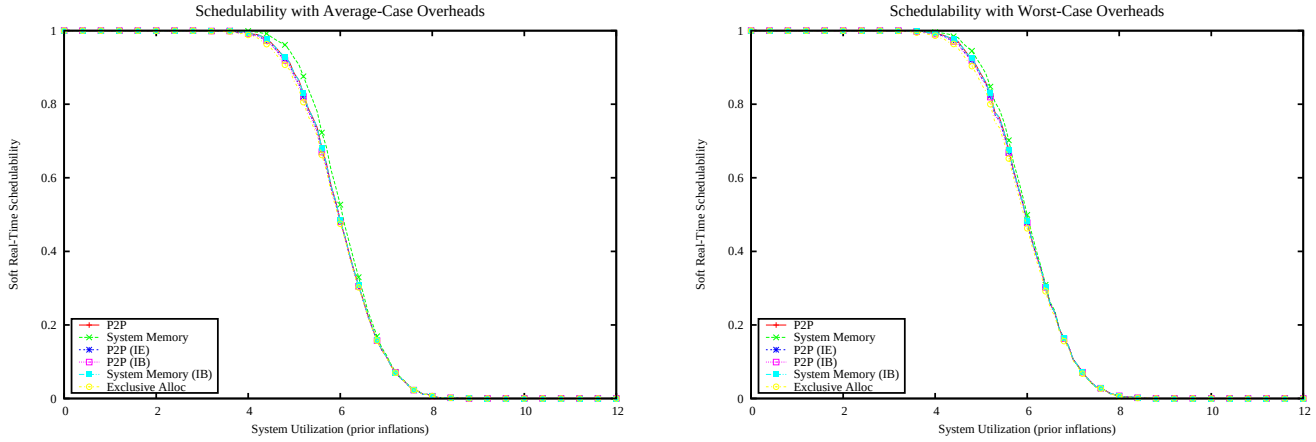

Figure 3760: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

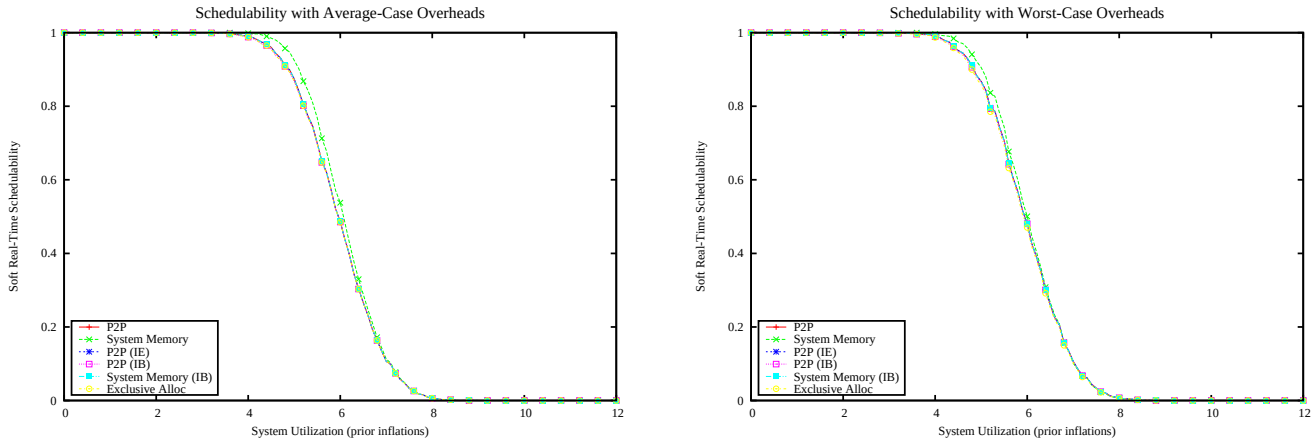

Figure 3761: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

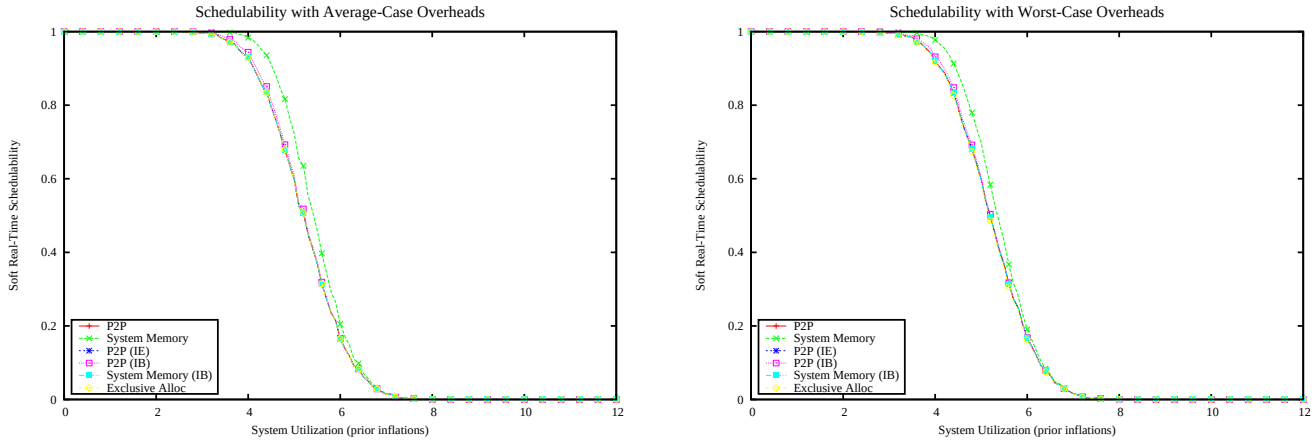

Figure 3762: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

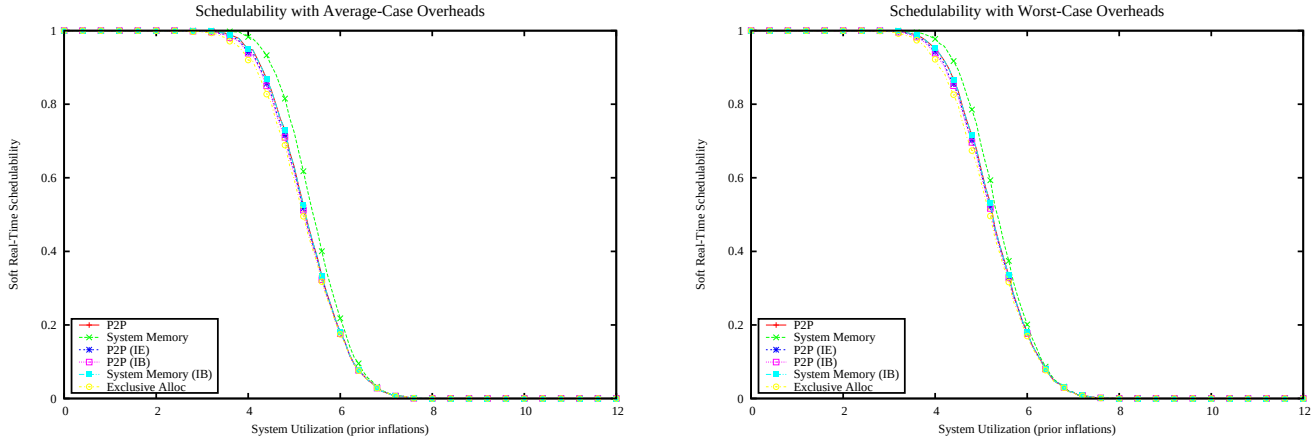

Figure 3763: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

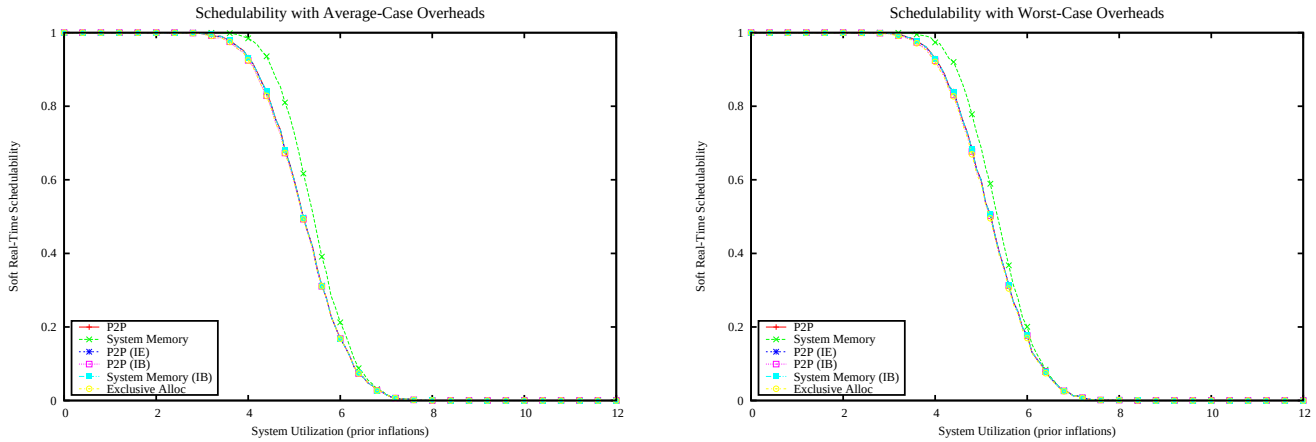

Figure 3764: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

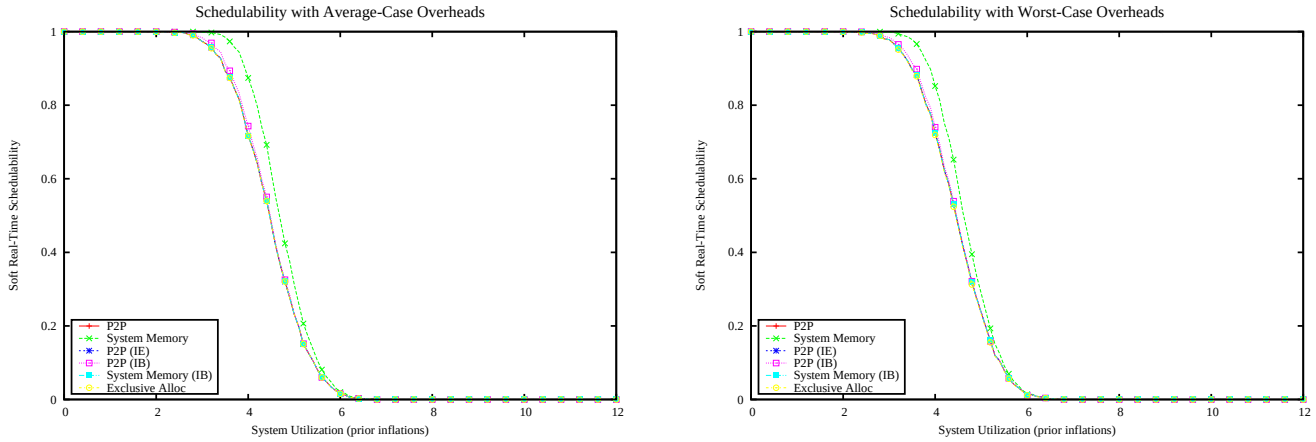

Figure 3765: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

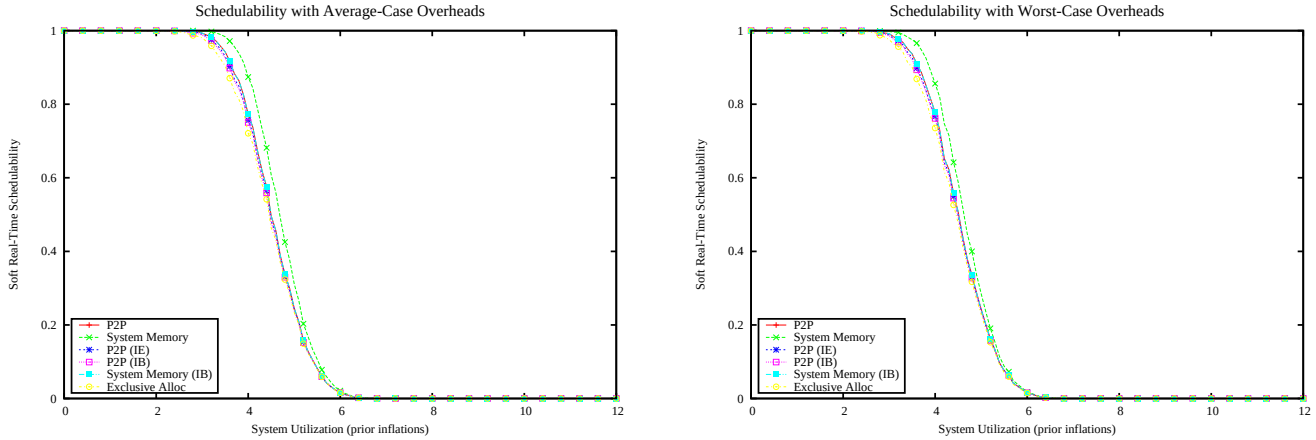

Figure 3766: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

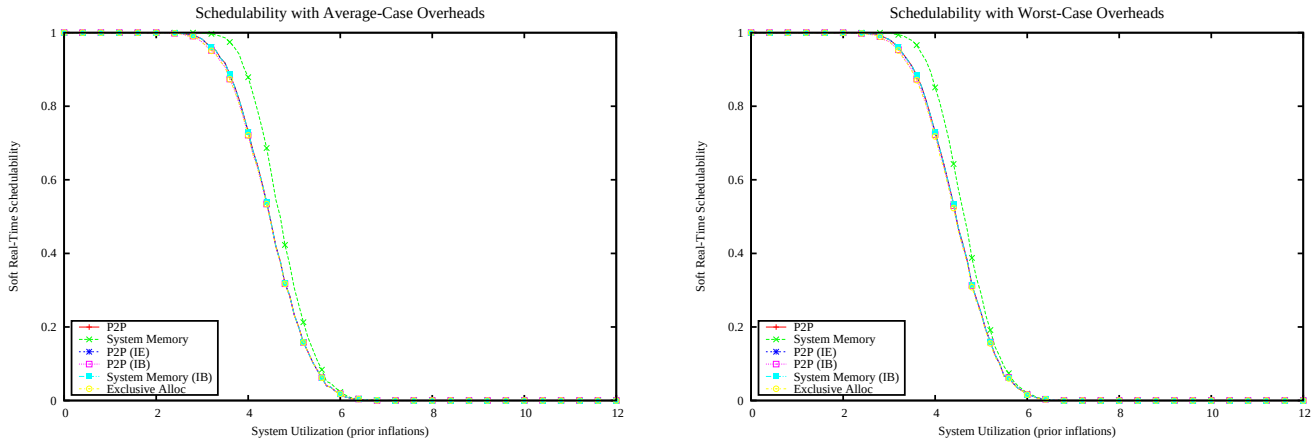

Figure 3767: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

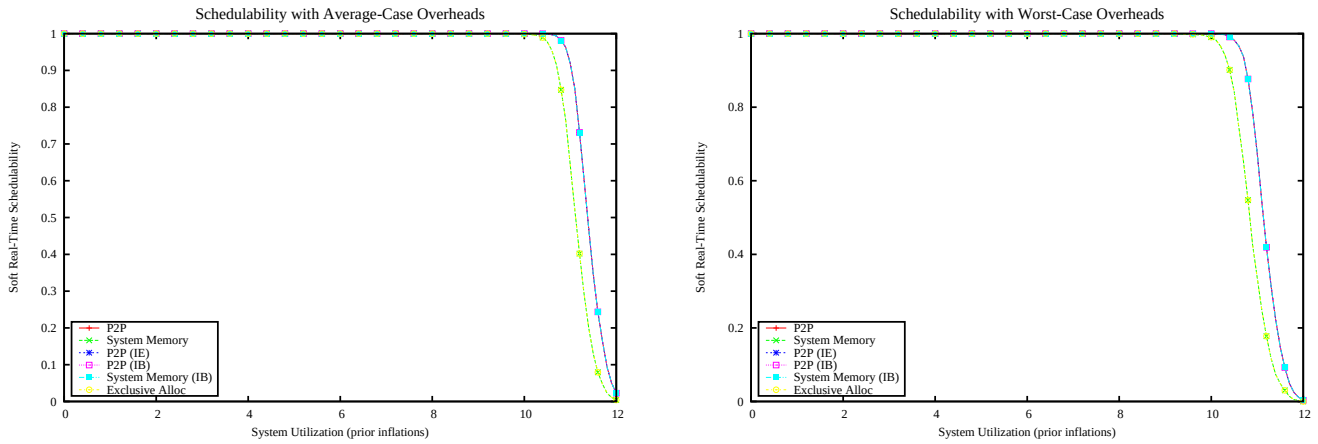

Figure 3768: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

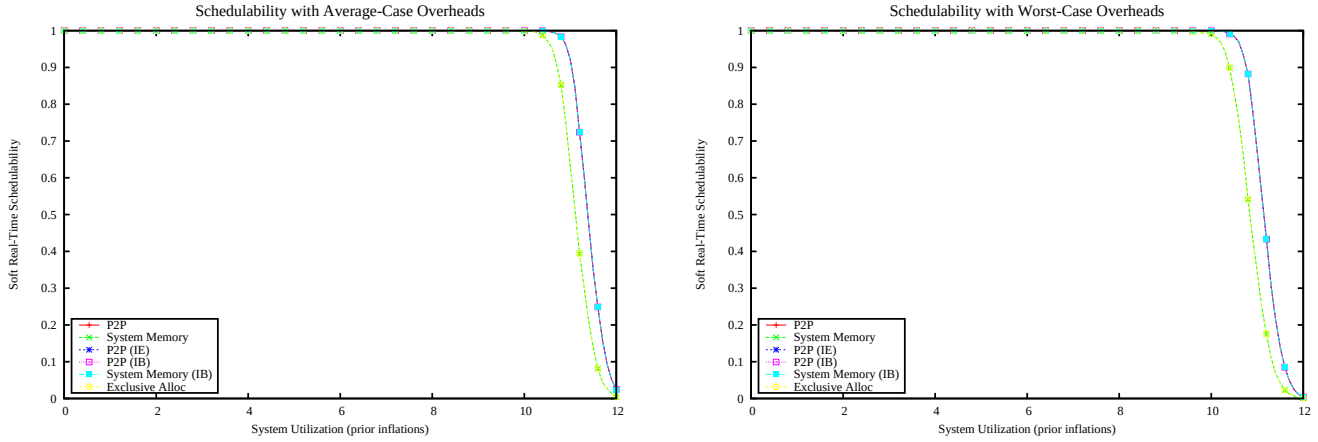

Figure 3769: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

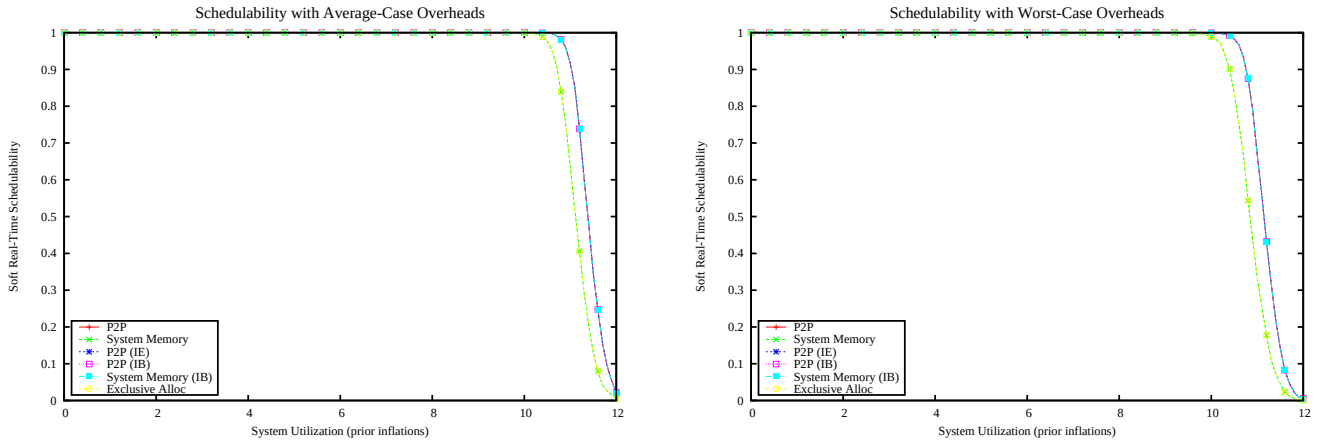

Figure 3770: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

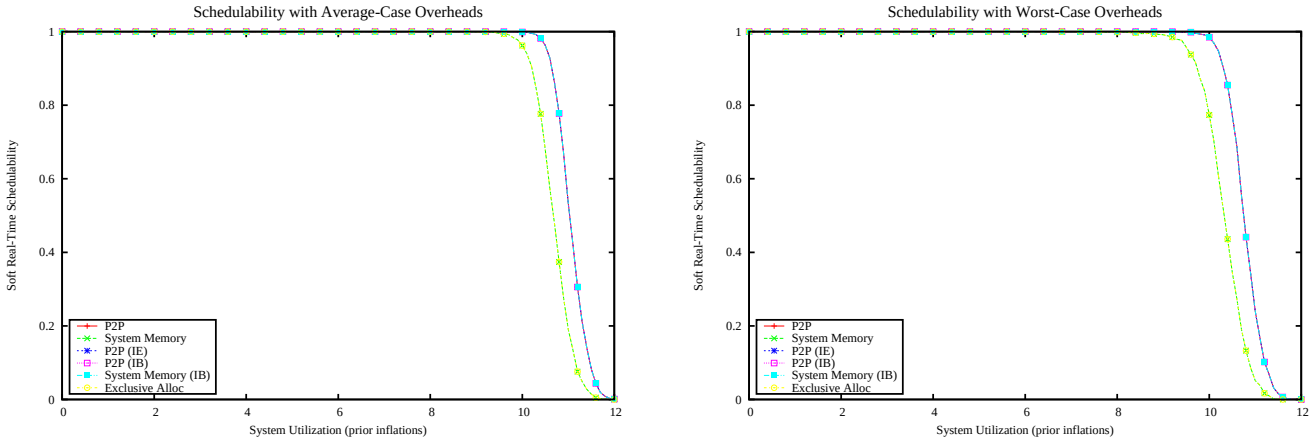

Figure 3771: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

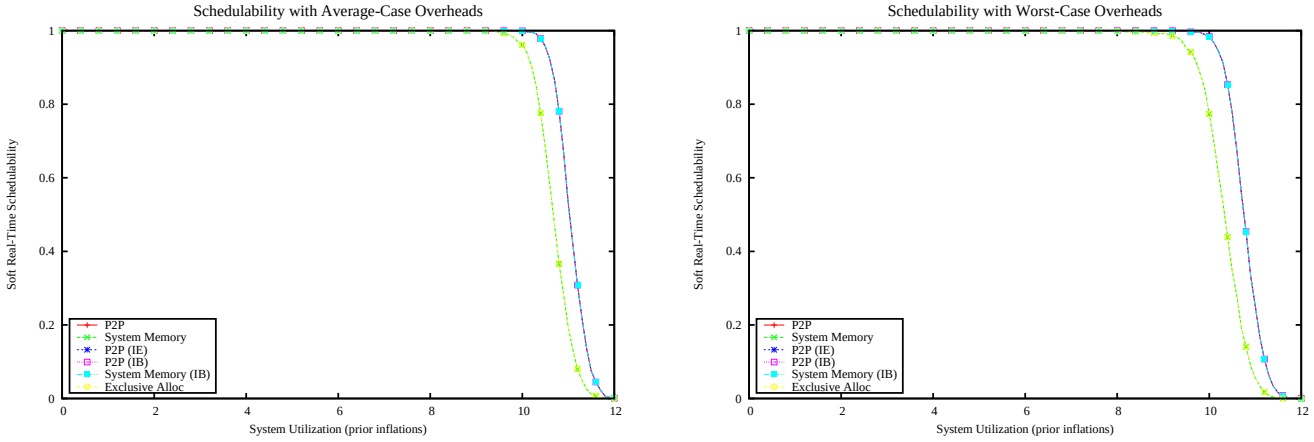

Figure 3772: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

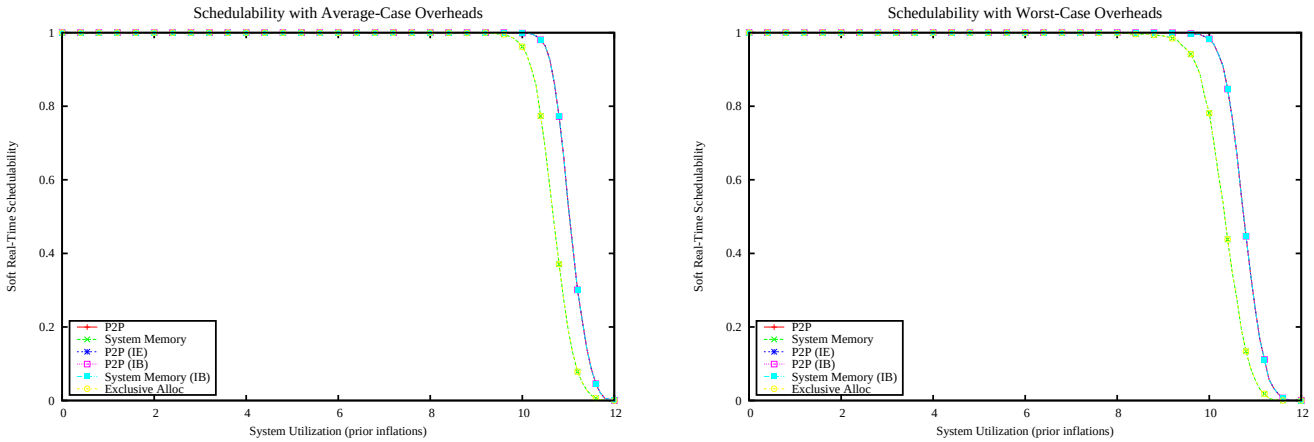

Figure 3773: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

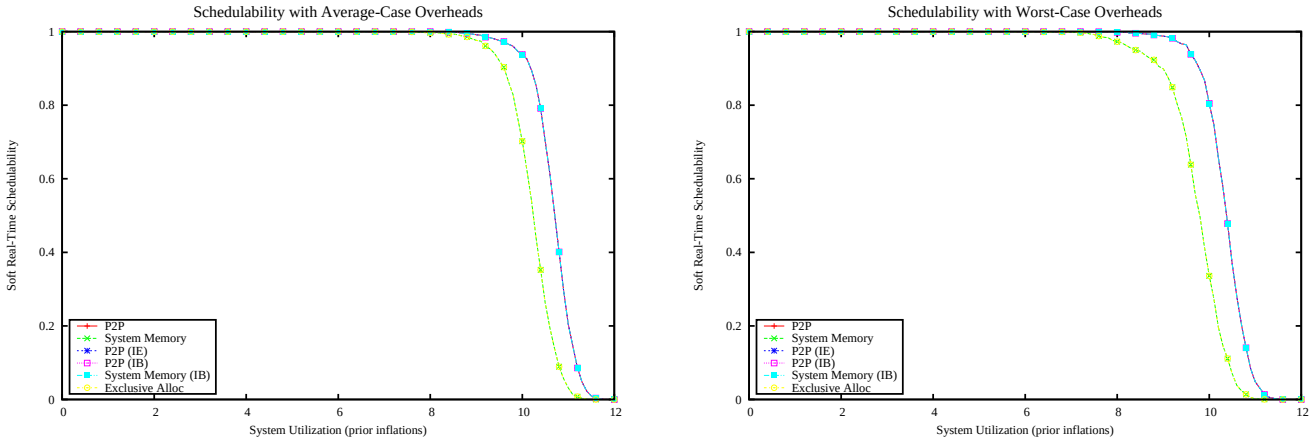

Figure 3774: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

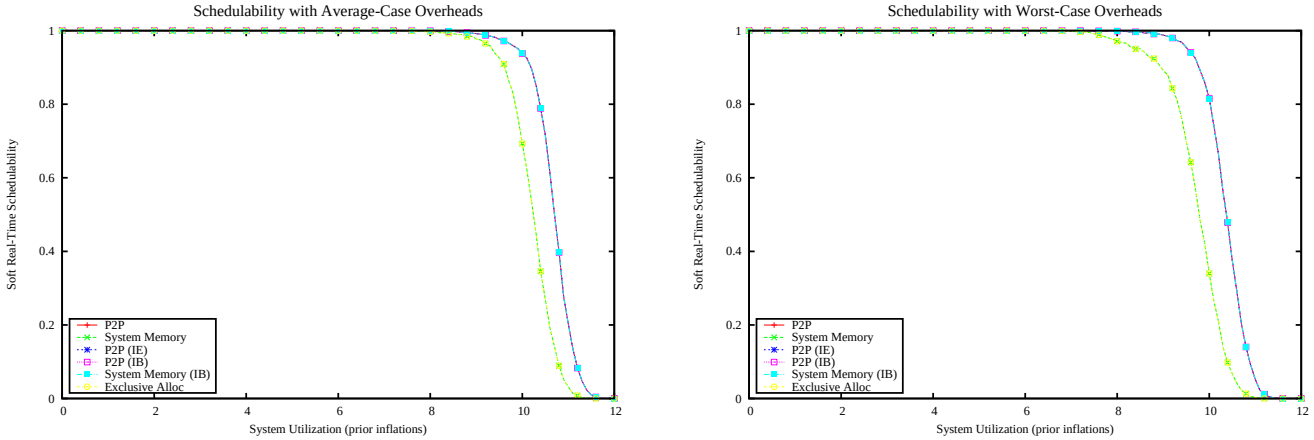

Figure 3775: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

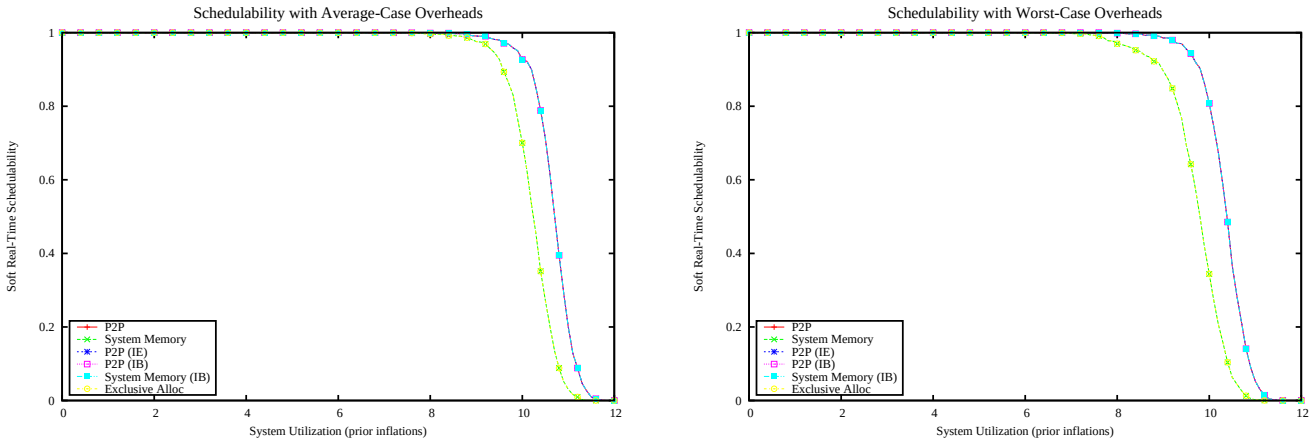

Figure 3776: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

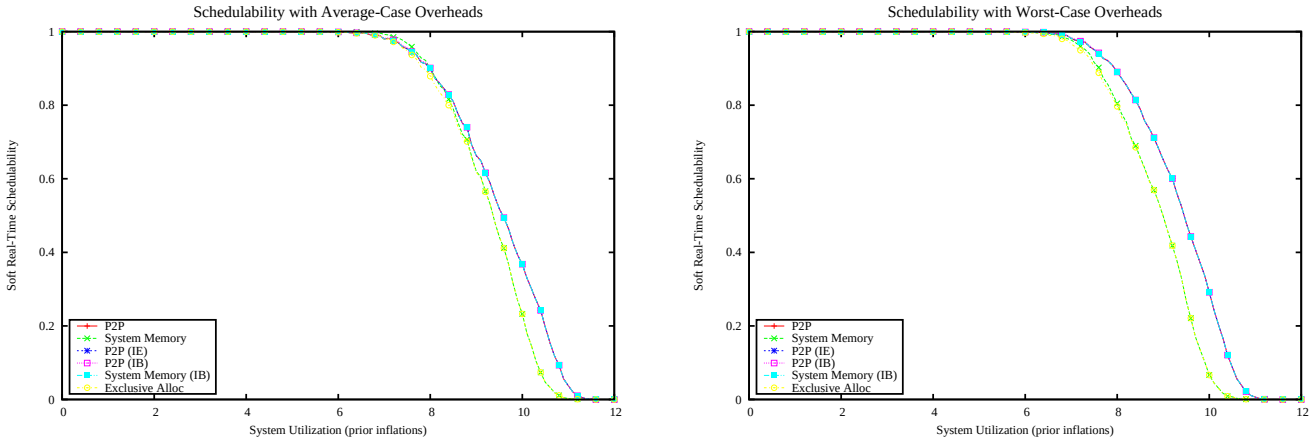

Figure 3777: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

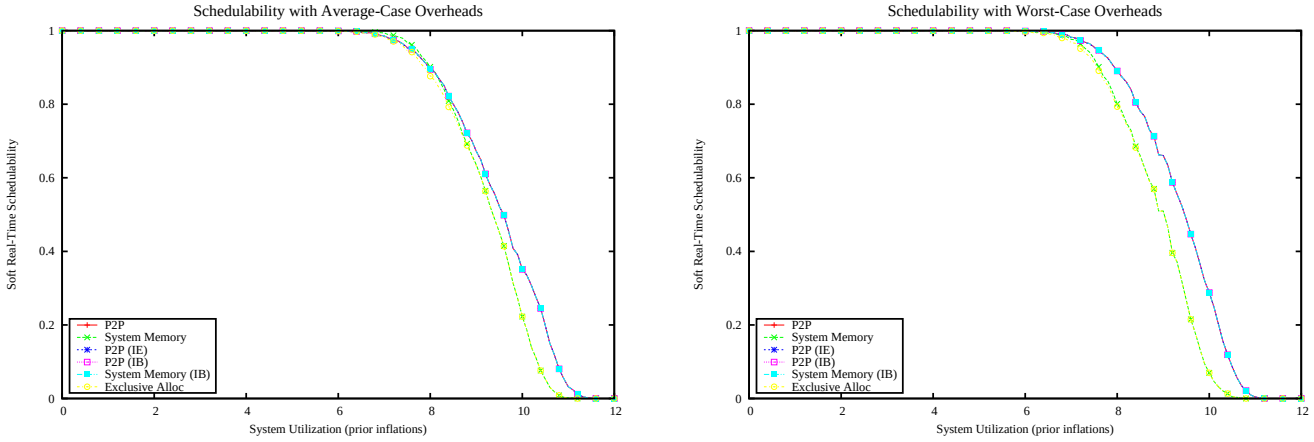

Figure 3778: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

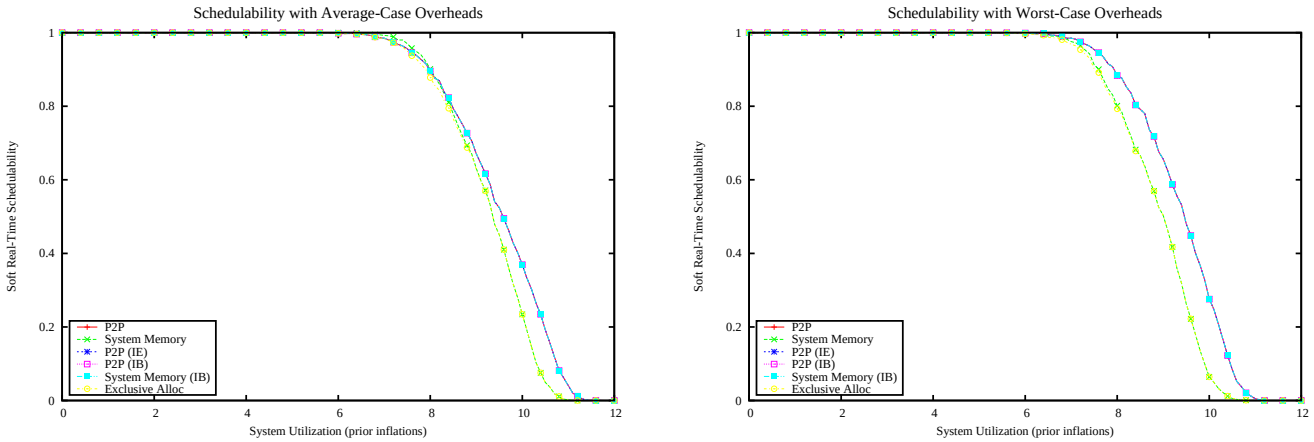

Figure 3779: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

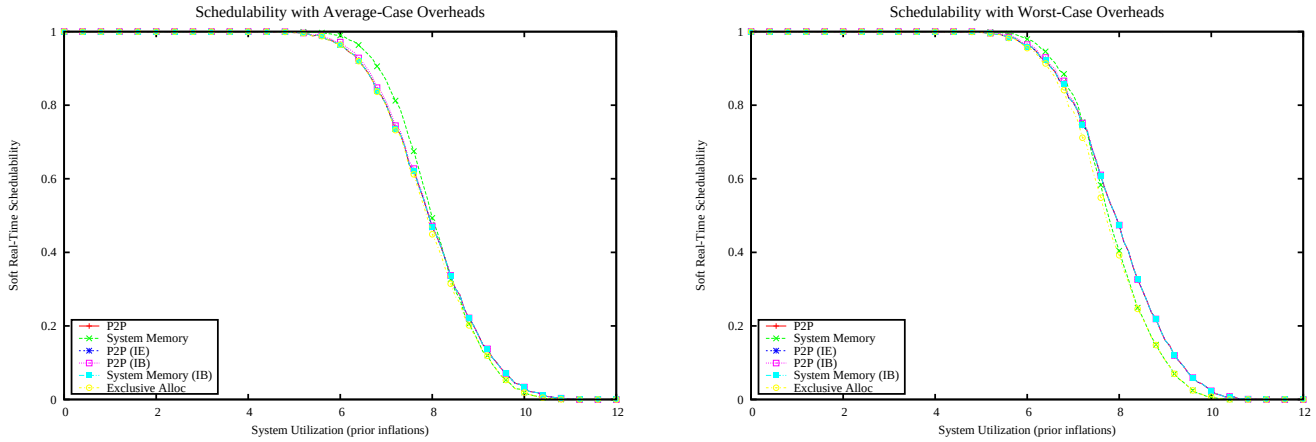

Figure 3780: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

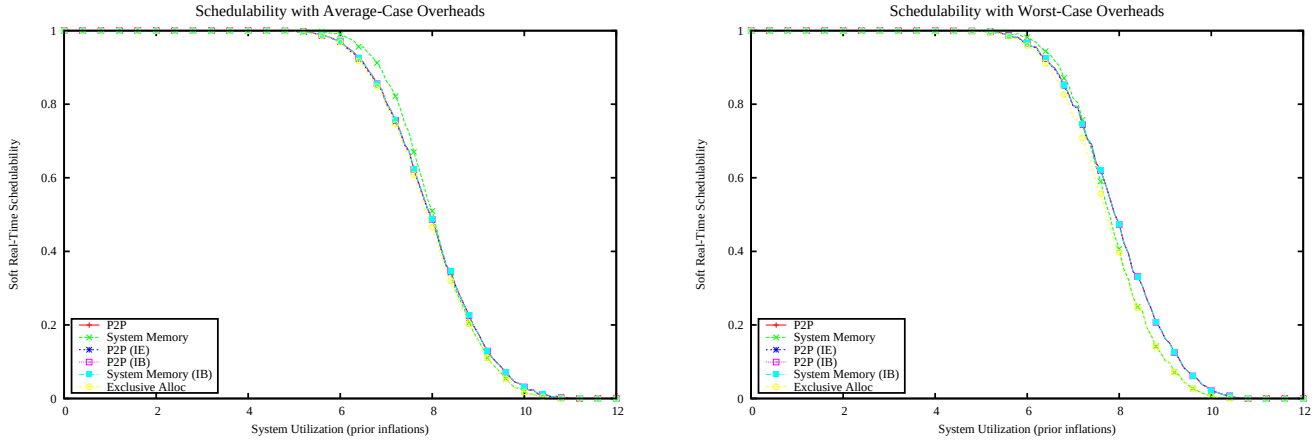

Figure 3781: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

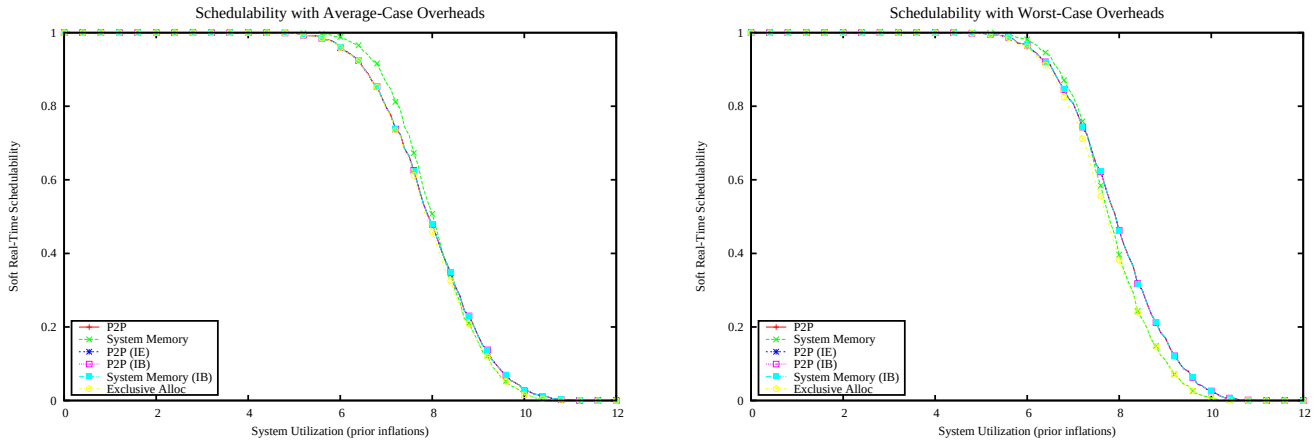

Figure 3782: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

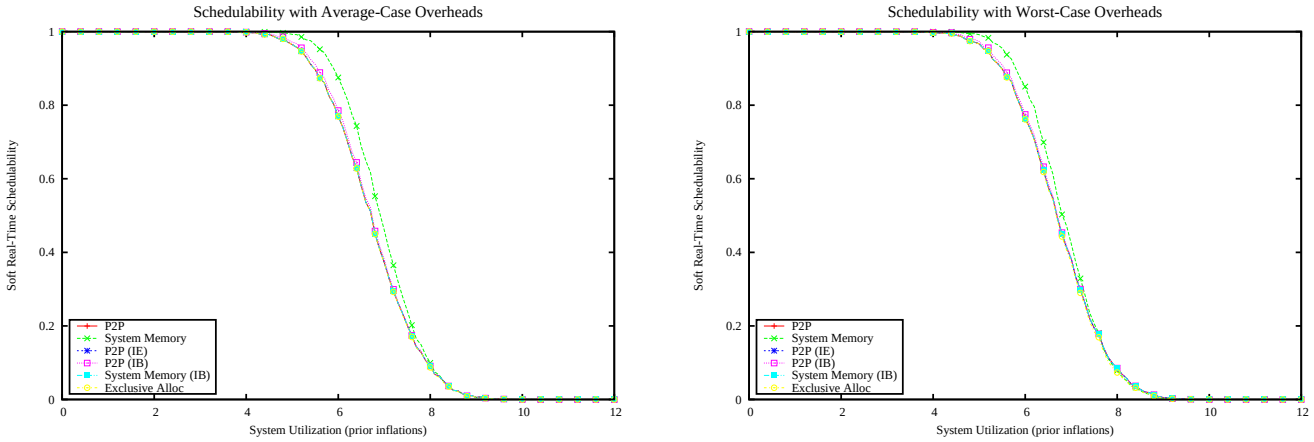

Figure 3783: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

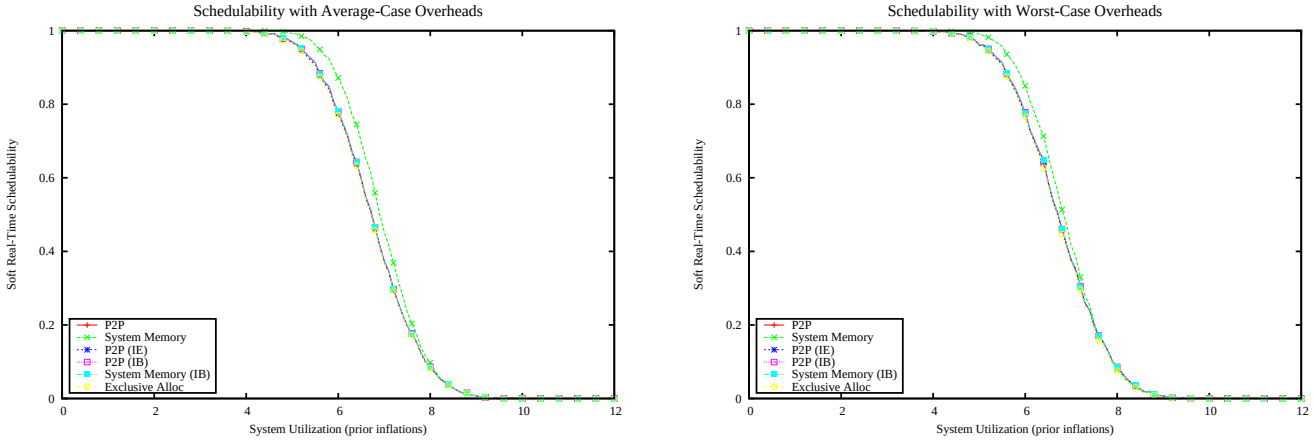

Figure 3784: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

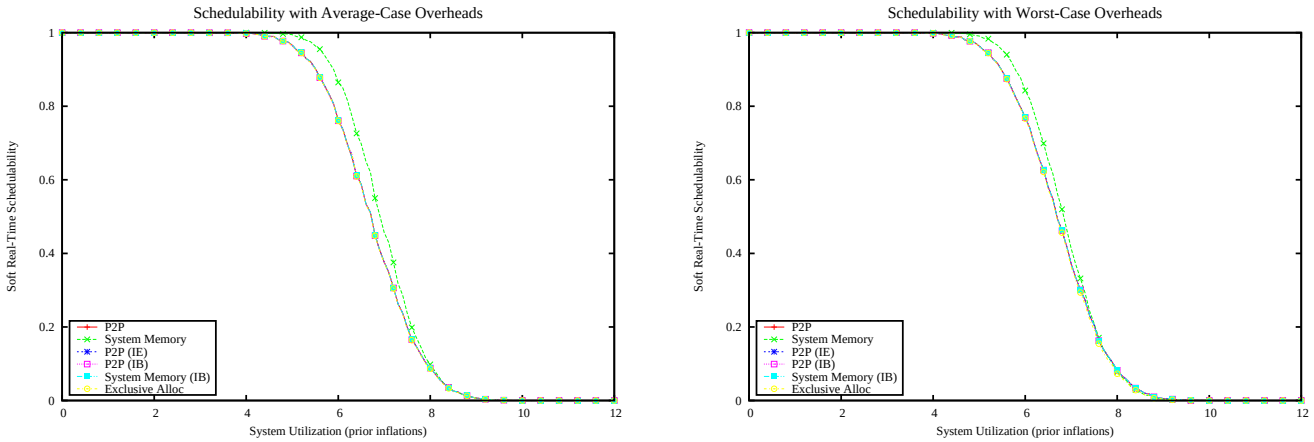

Figure 3785: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

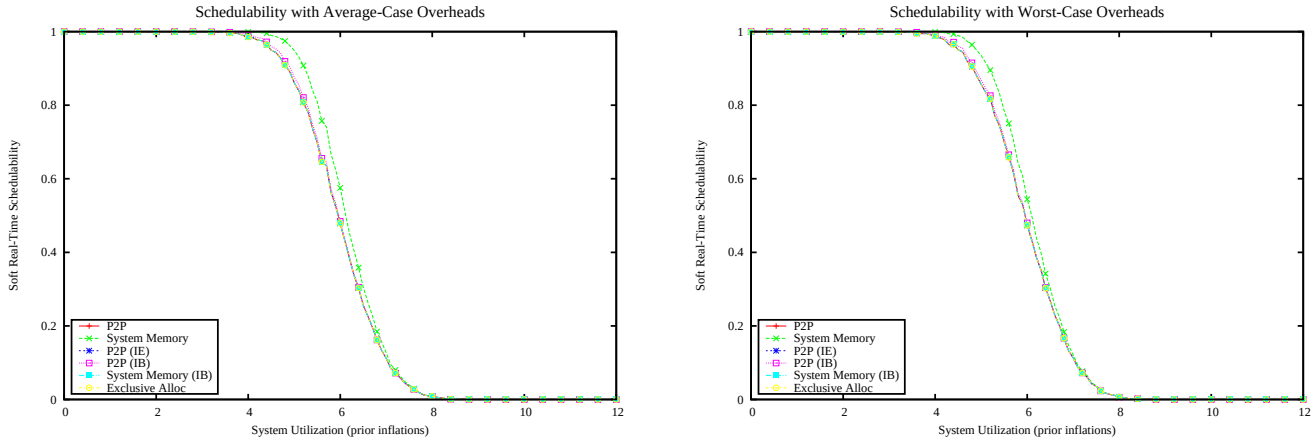

Figure 3786: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

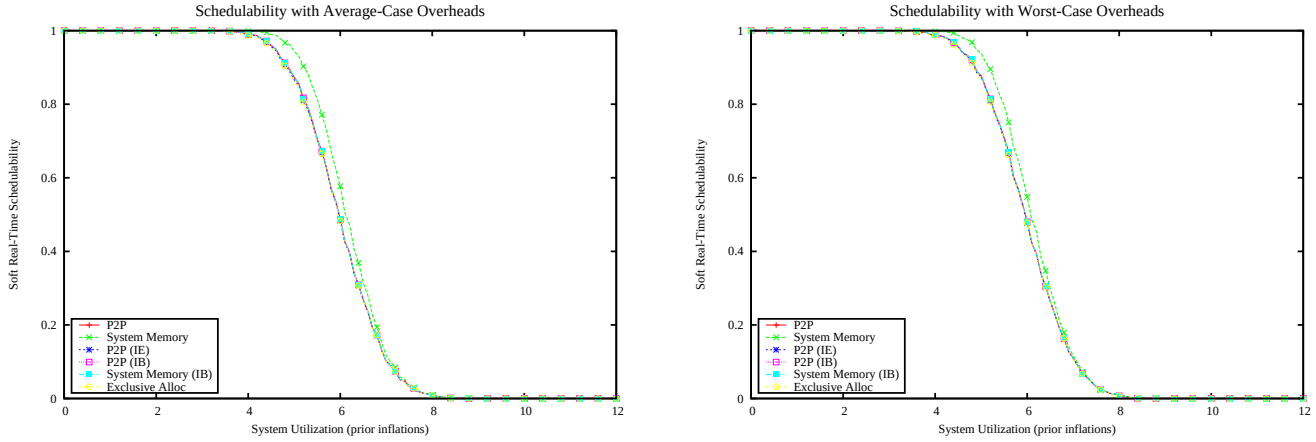

Figure 3787: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

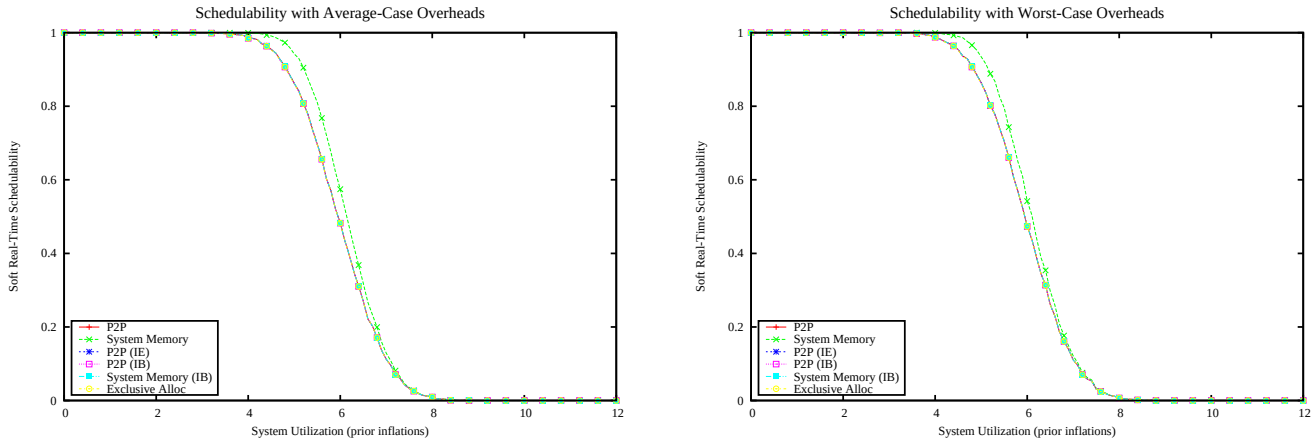

Figure 3788: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

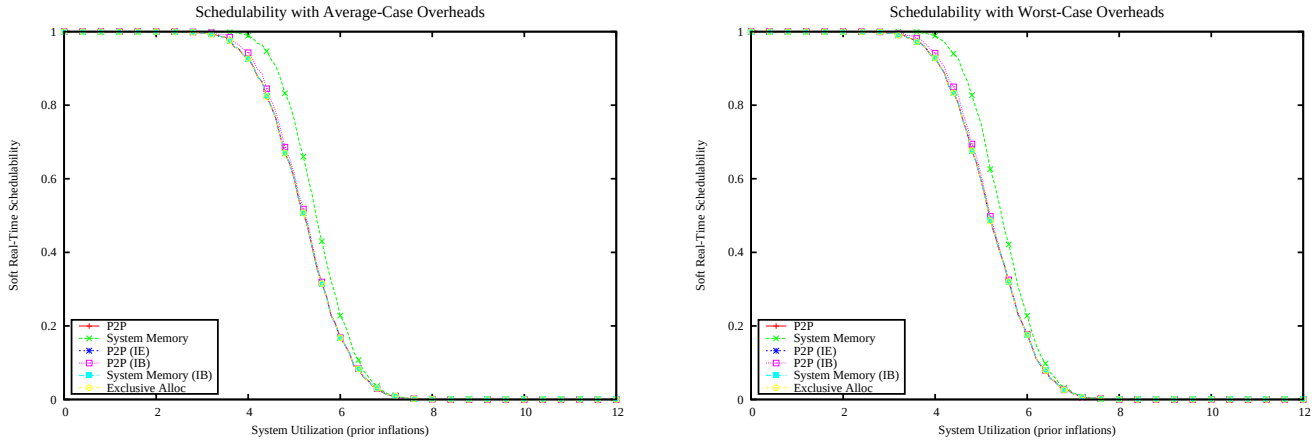

Figure 3789: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

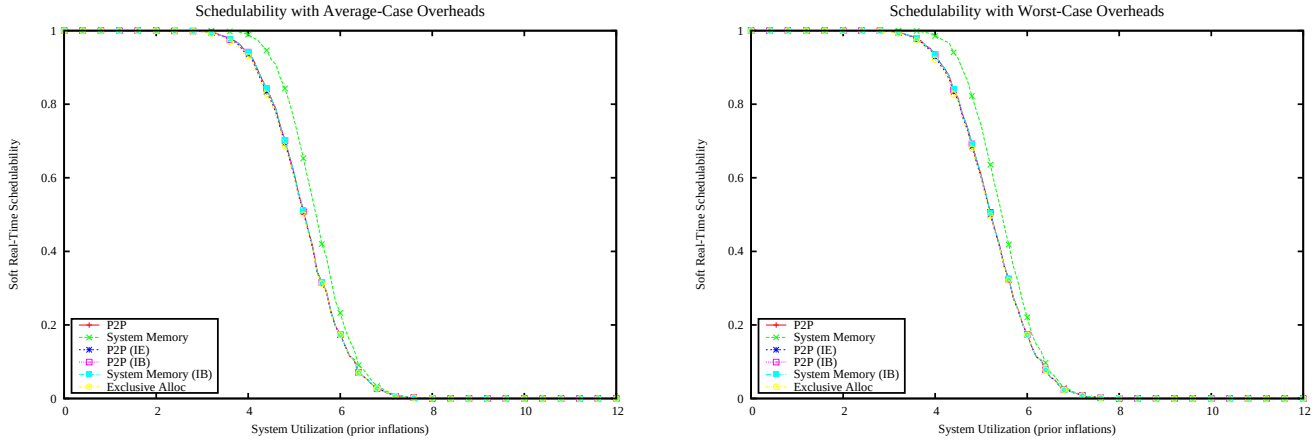

Figure 3790: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

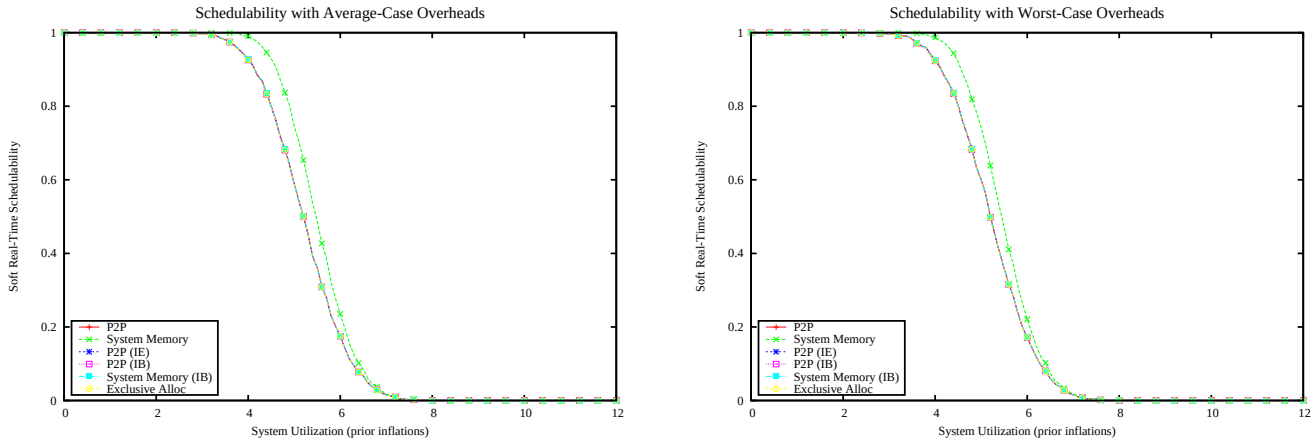

Figure 3791: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

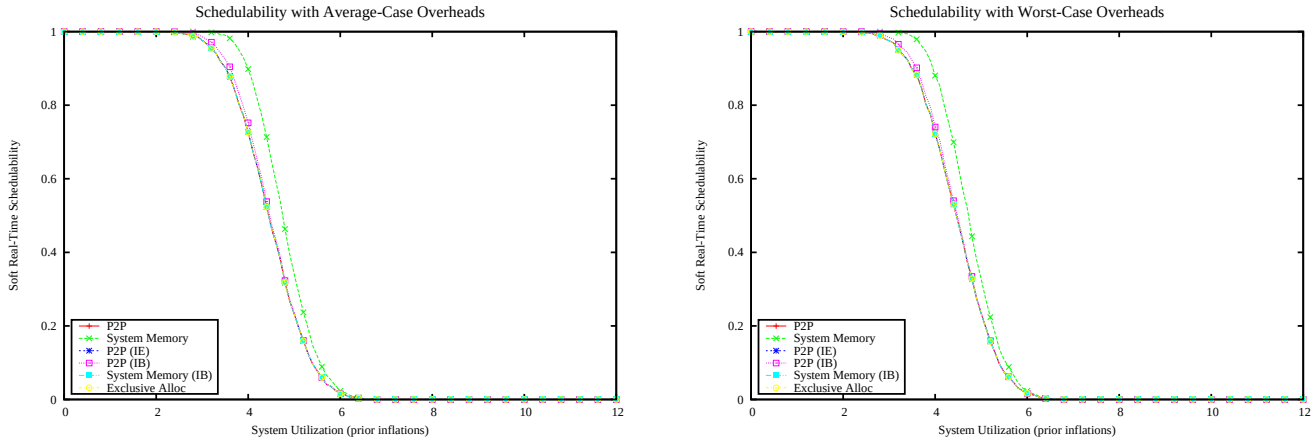

Figure 3792: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

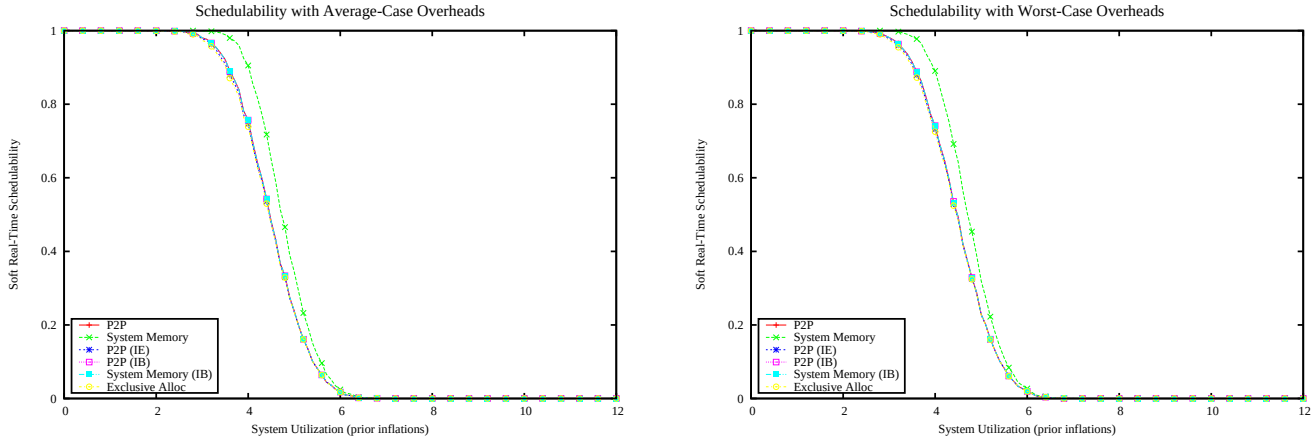

Figure 3793: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

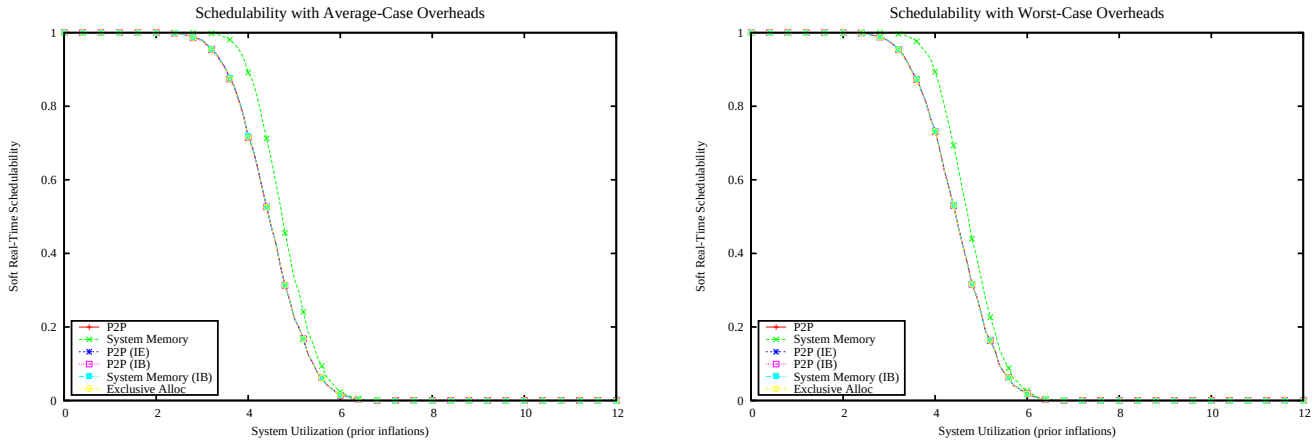

Figure 3794: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

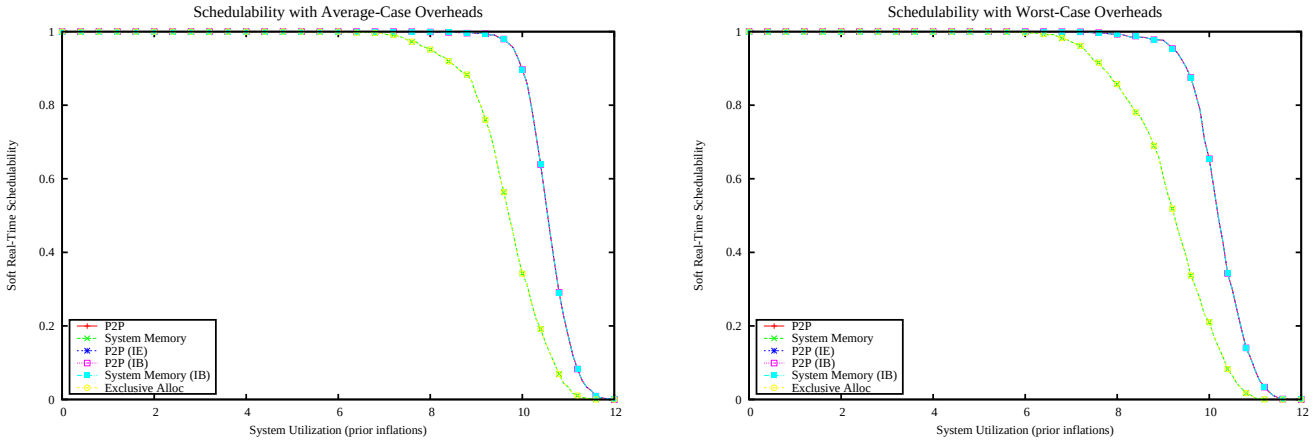

Figure 3795: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

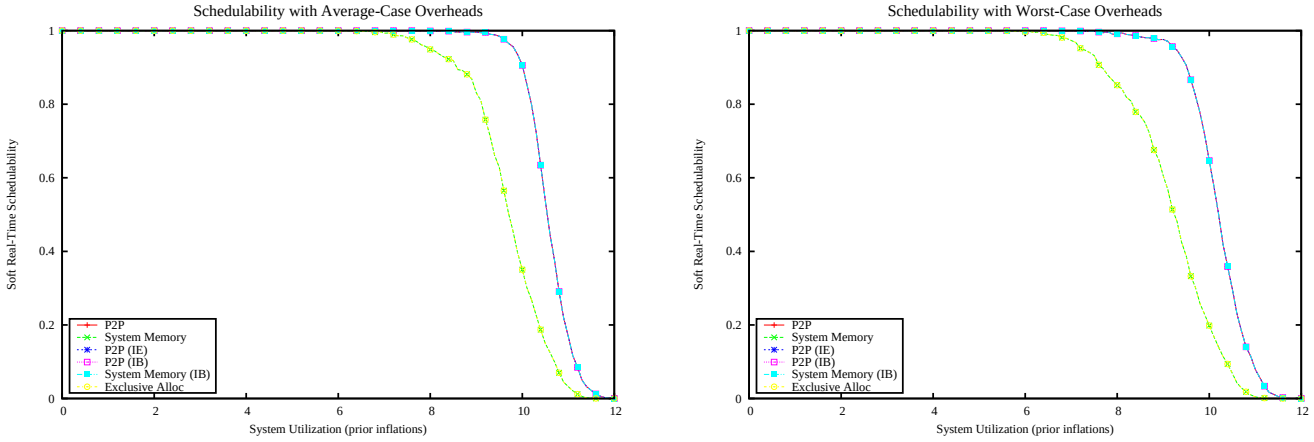

Figure 3796: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

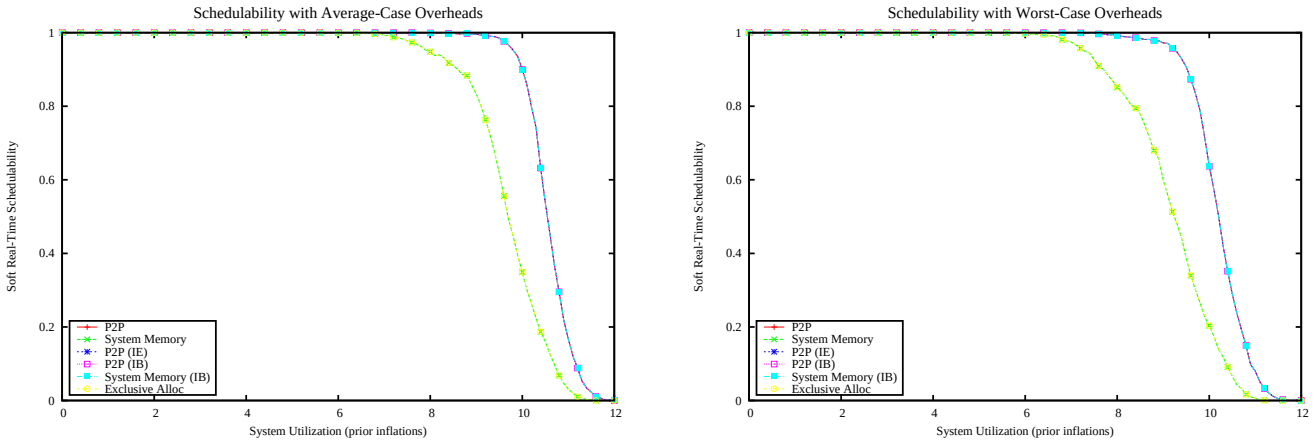

Figure 3797: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

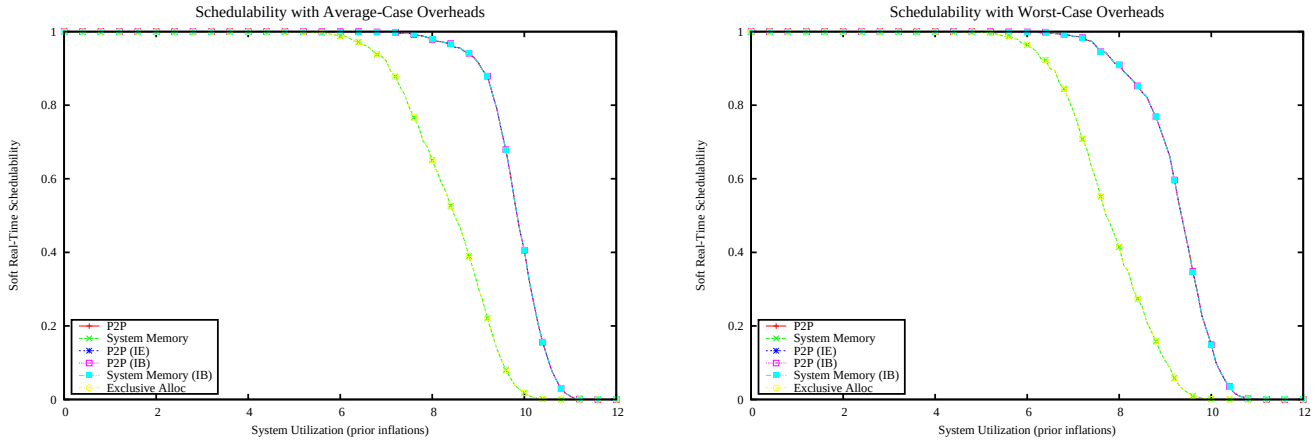

Figure 3798: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

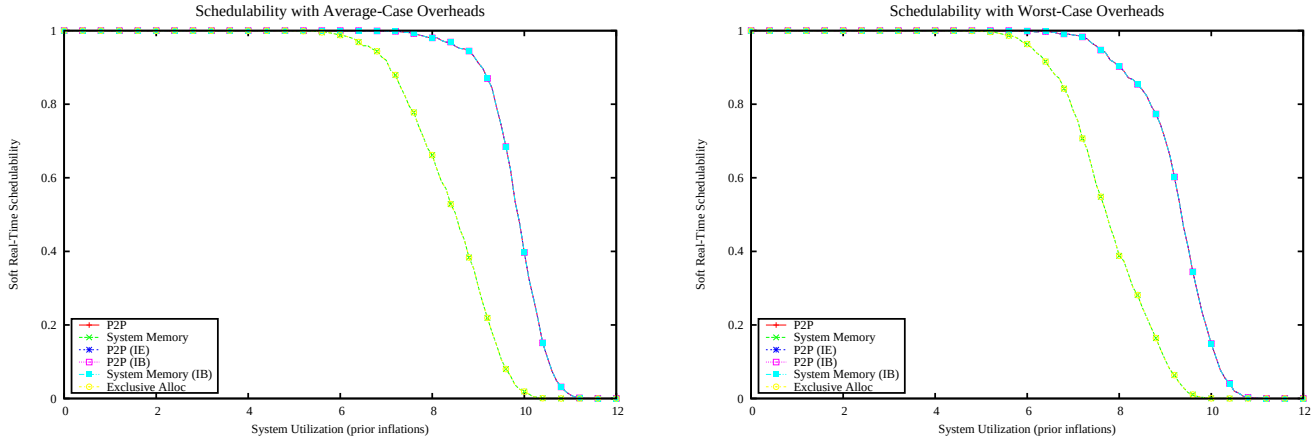

Figure 3799: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

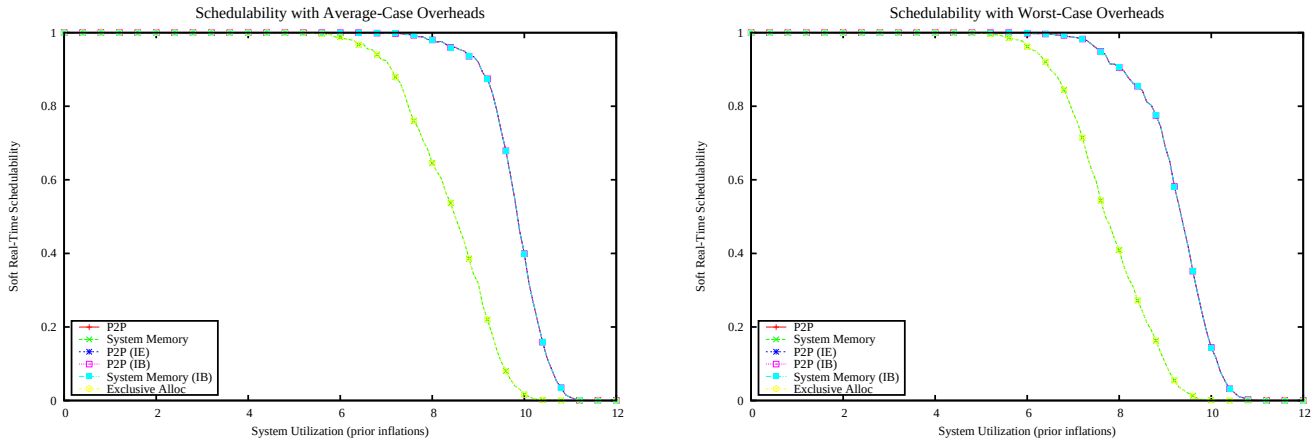

Figure 3800: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

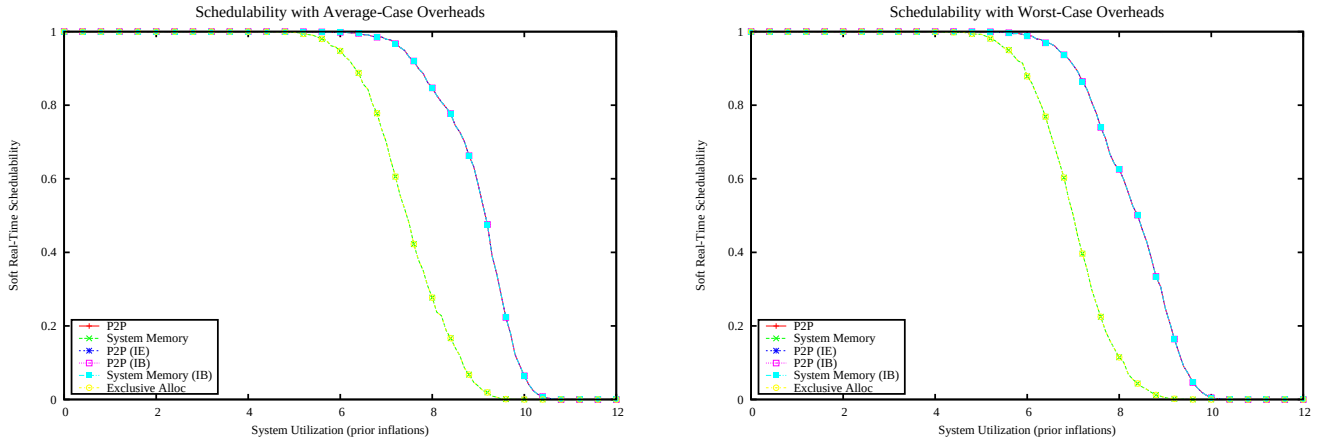

Figure 3801: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

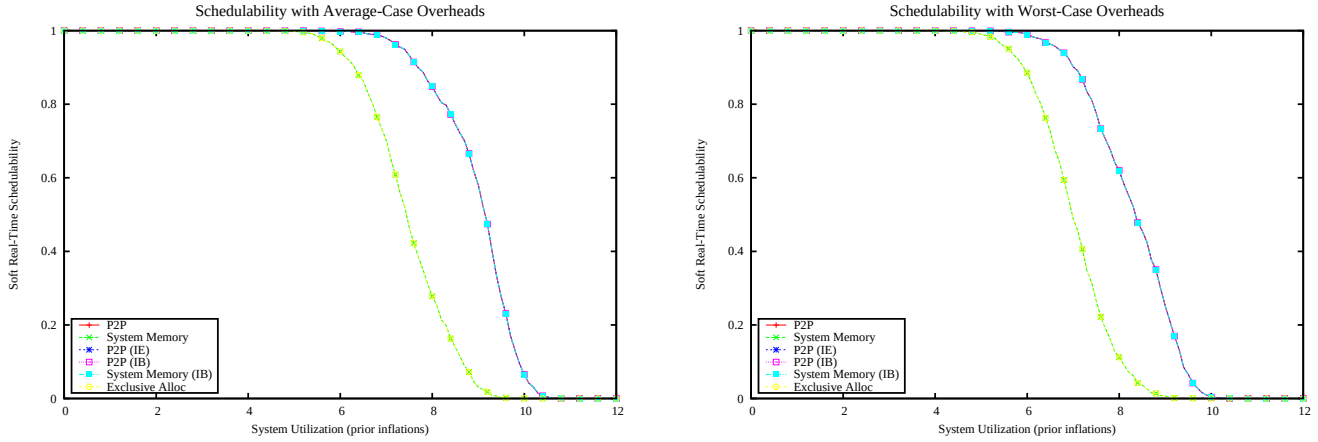

Figure 3802: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

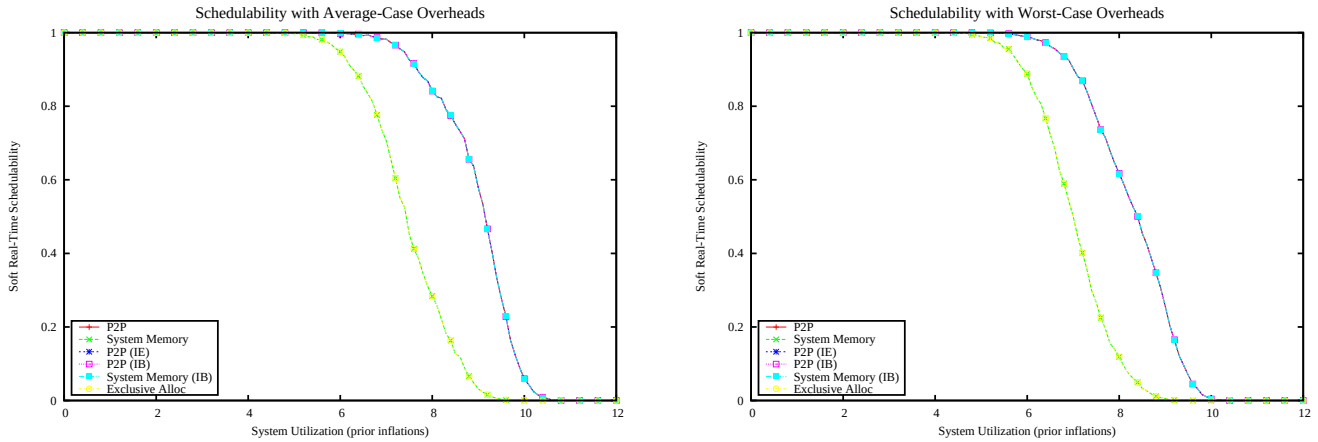

Figure 3803: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

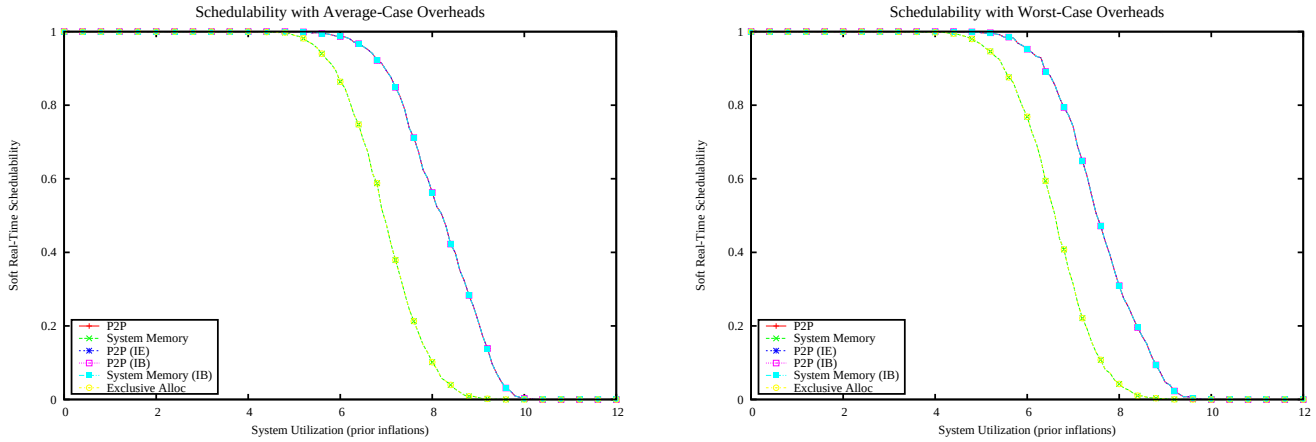

Figure 3804: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

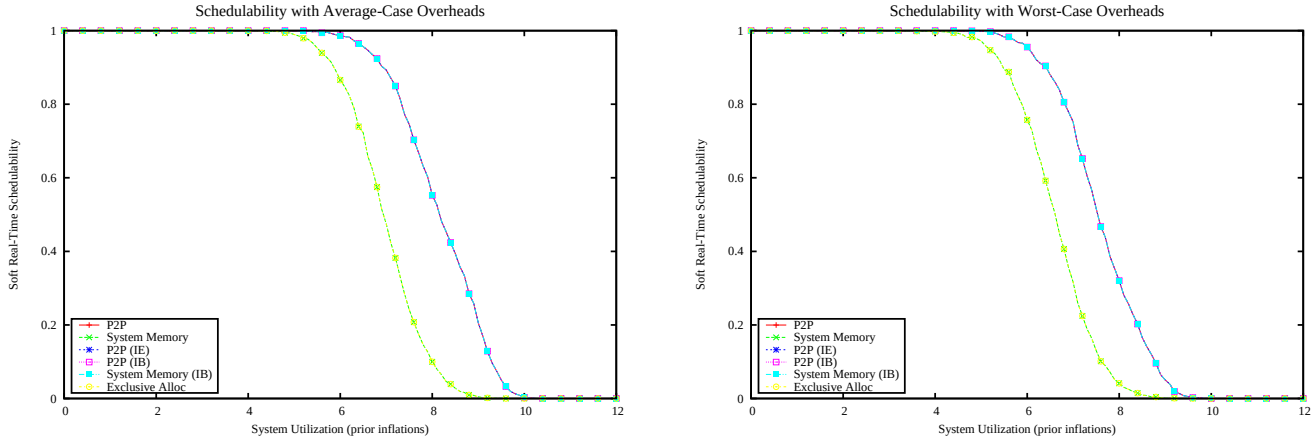

Figure 3805: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

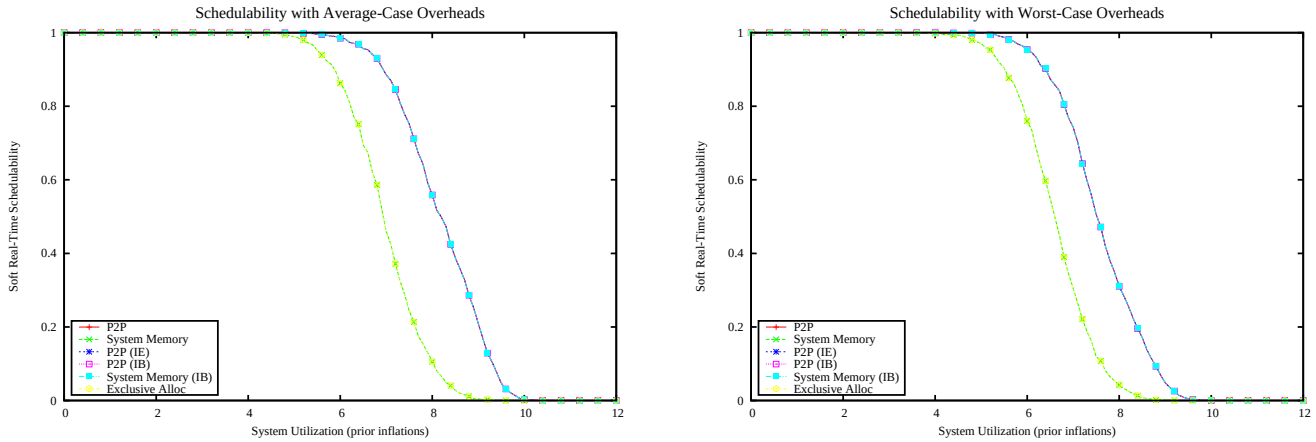

Figure 3806: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

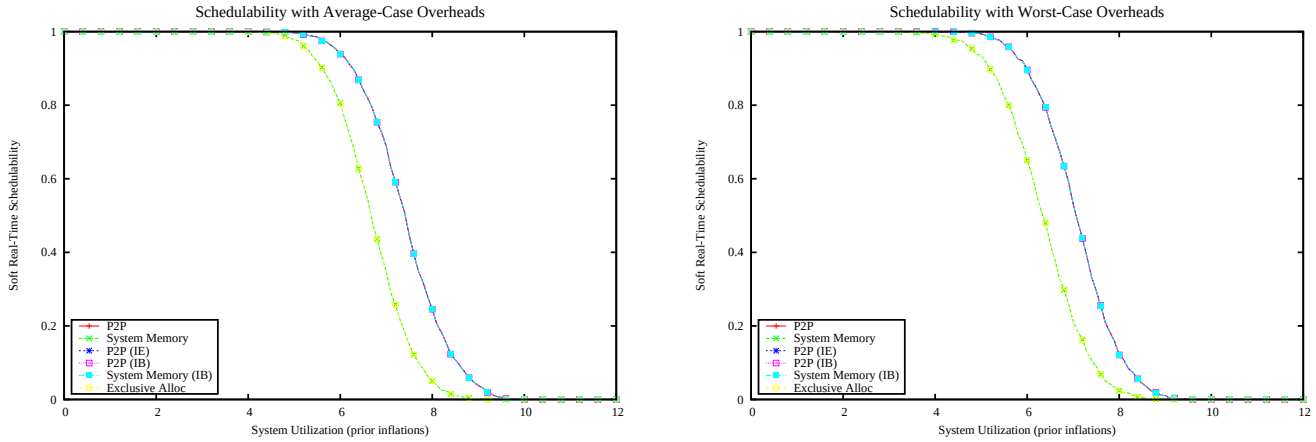

Figure 3807: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

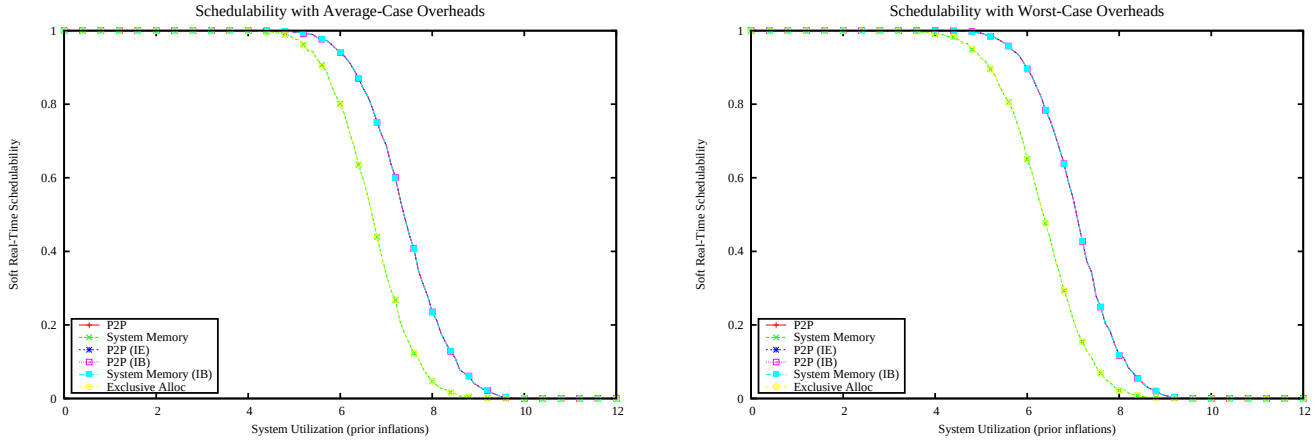

Figure 3808: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

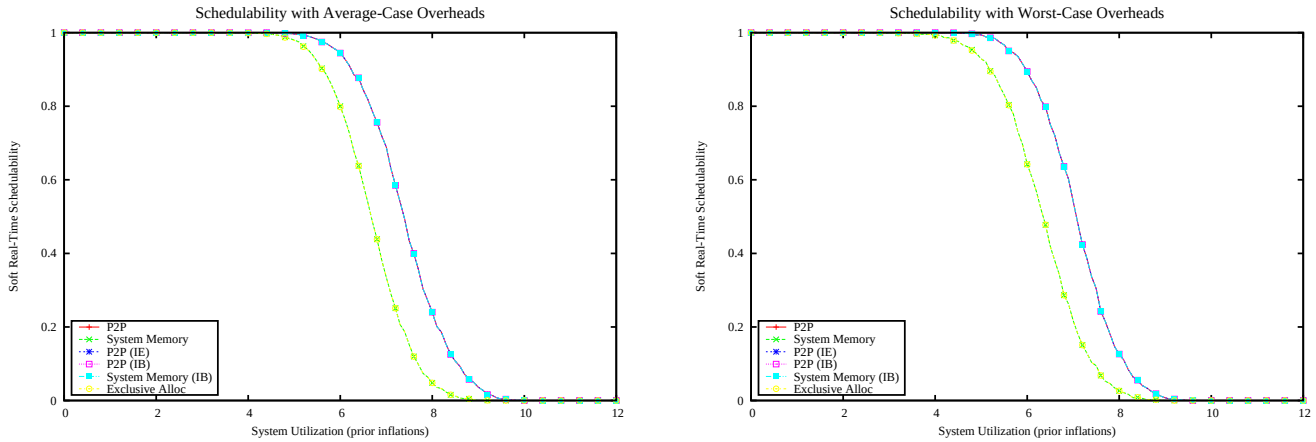

Figure 3809: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

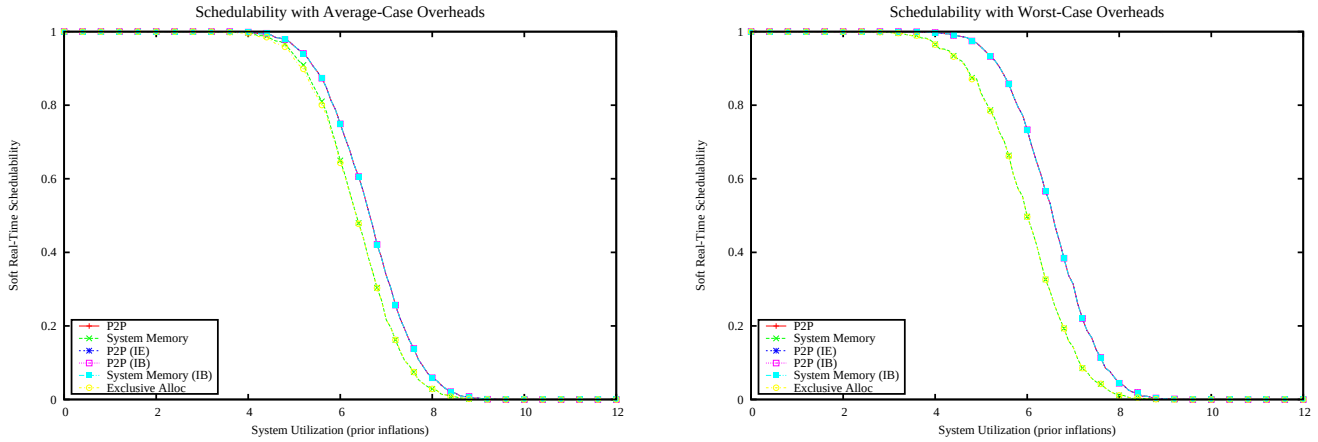

Figure 3810: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

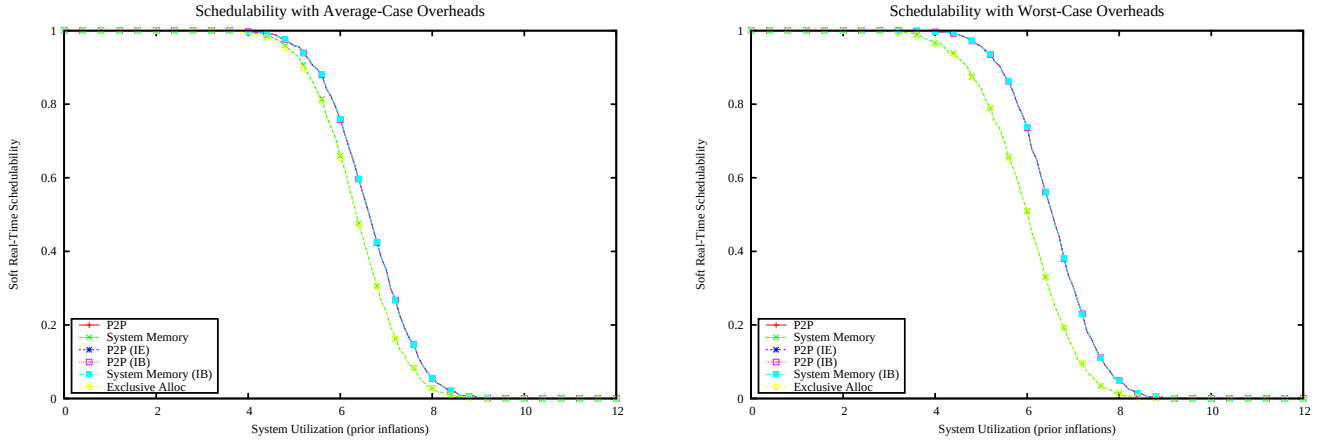

Figure 3811: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

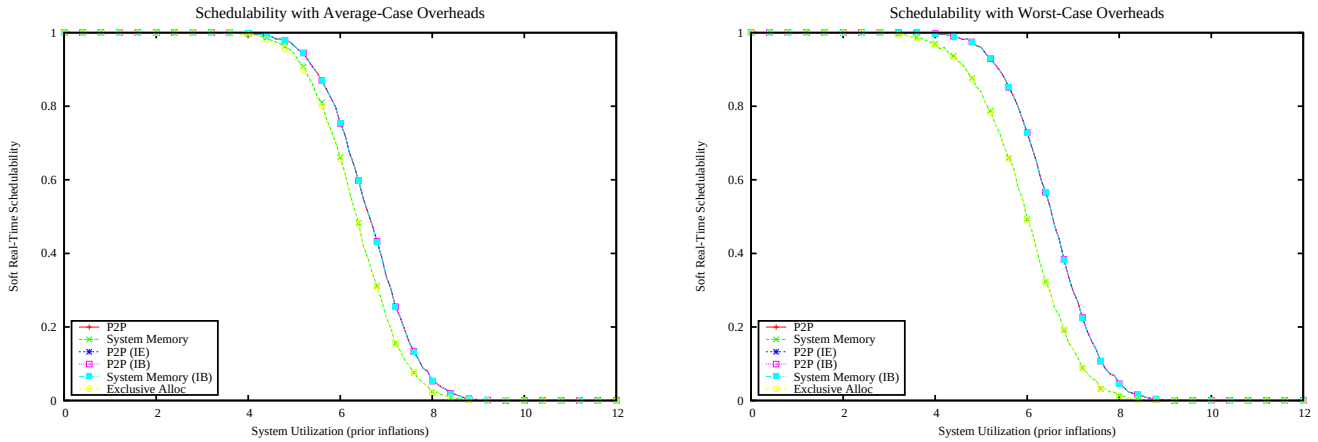

Figure 3812: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

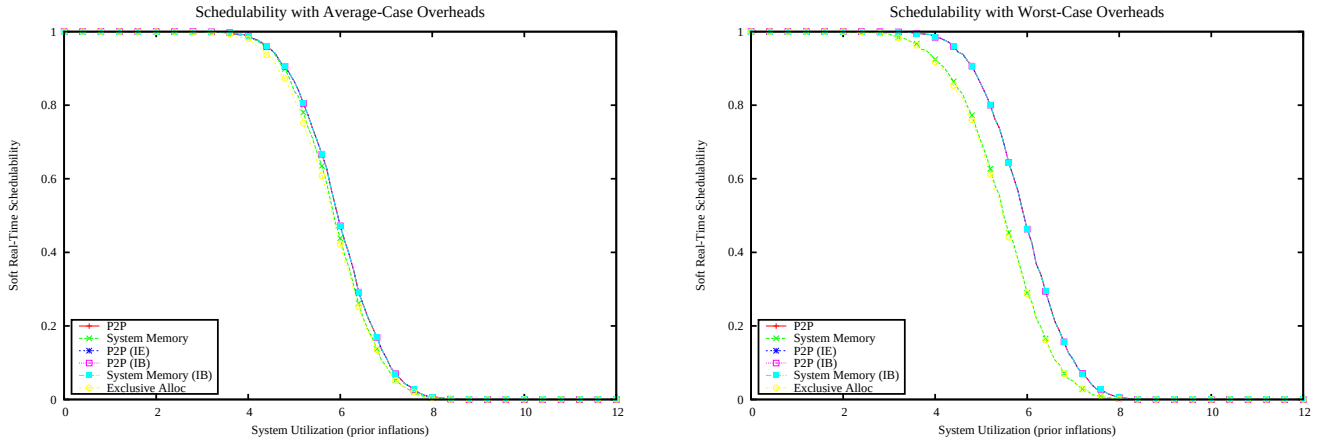

Figure 3813: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

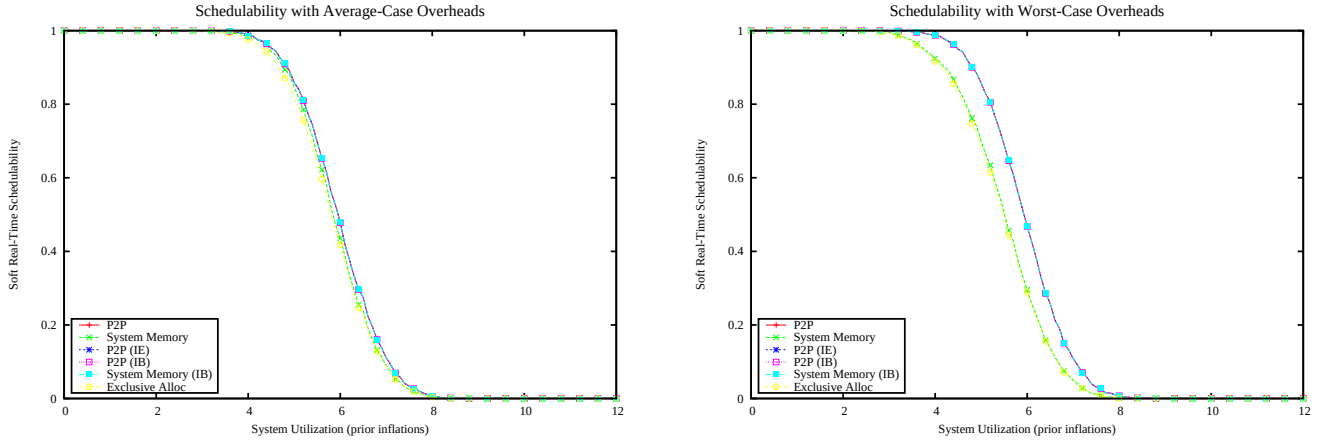

Figure 3814: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

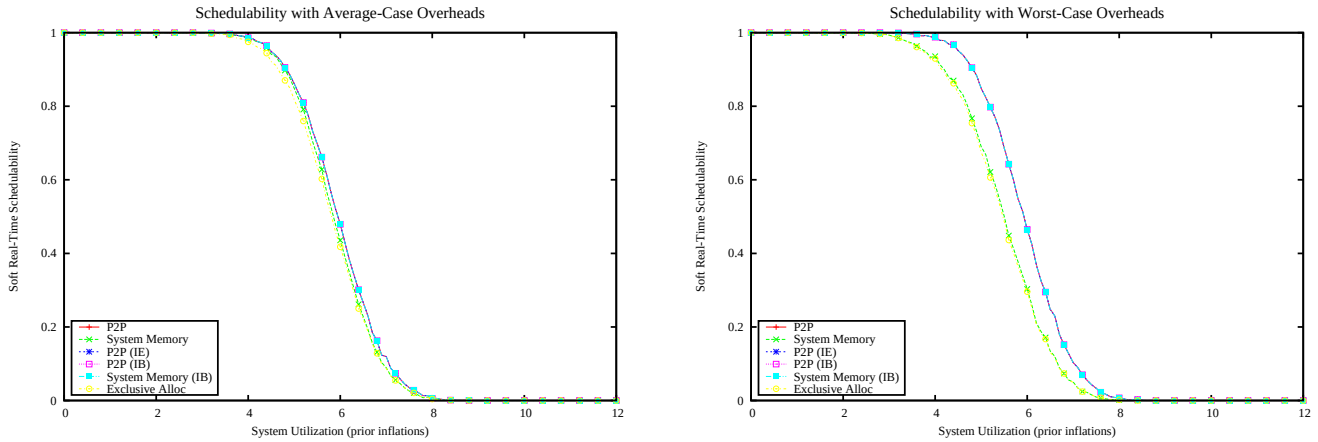

Figure 3815: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

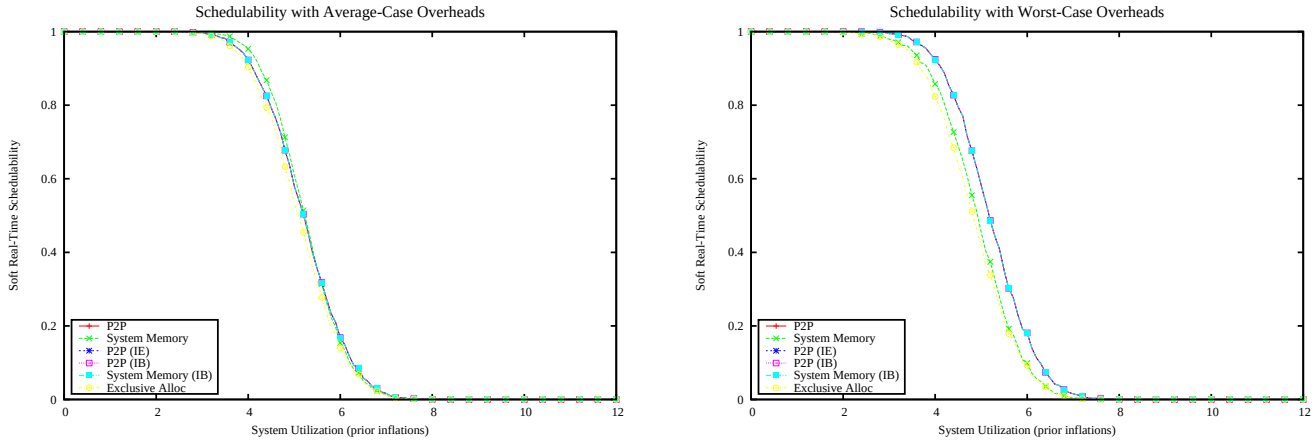

Figure 3816: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

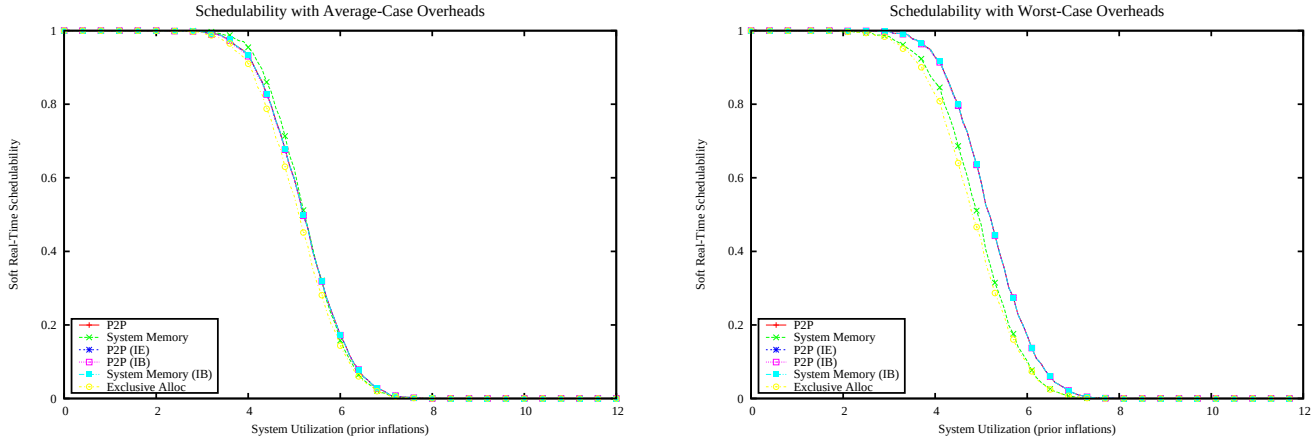

Figure 3817: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

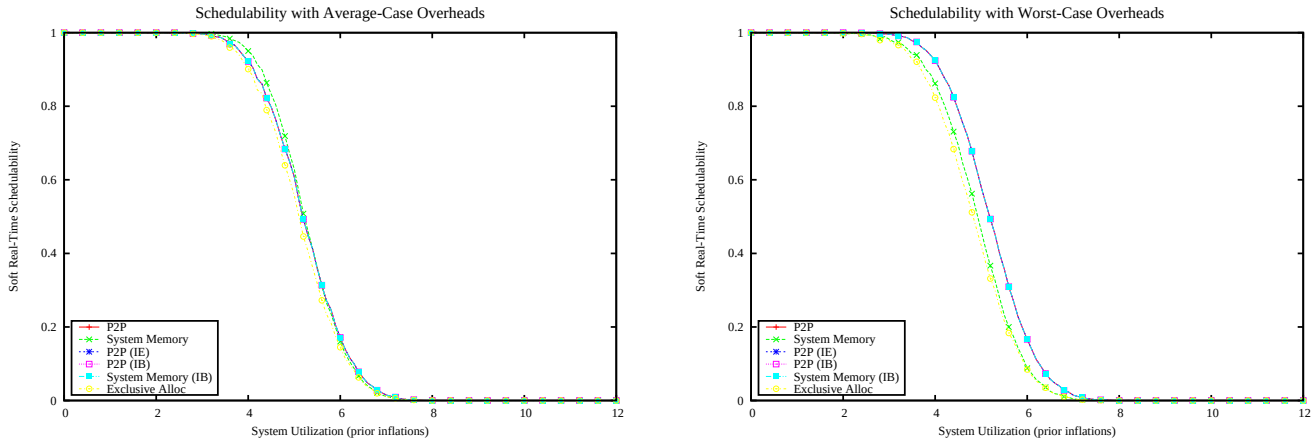

Figure 3818: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

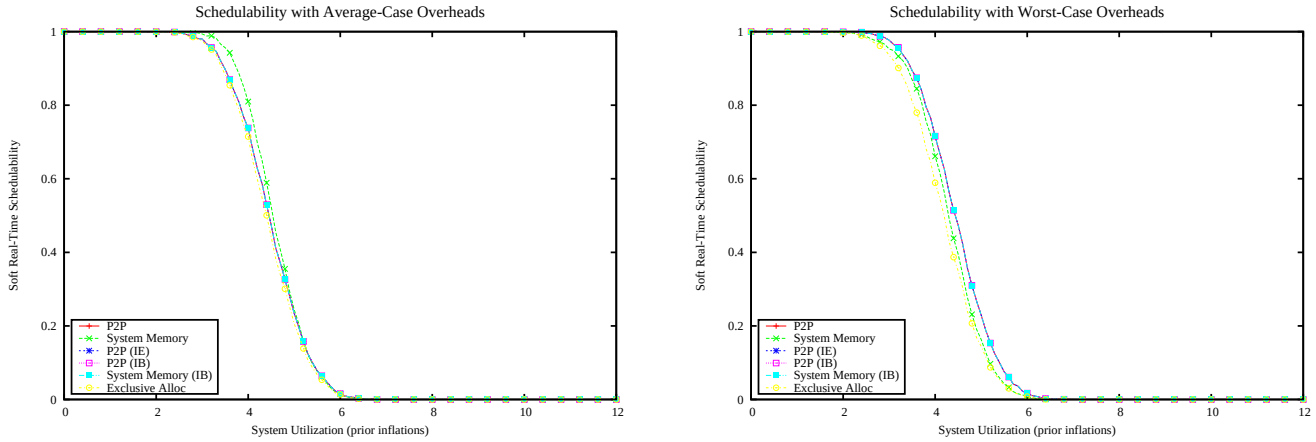

Figure 3819: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

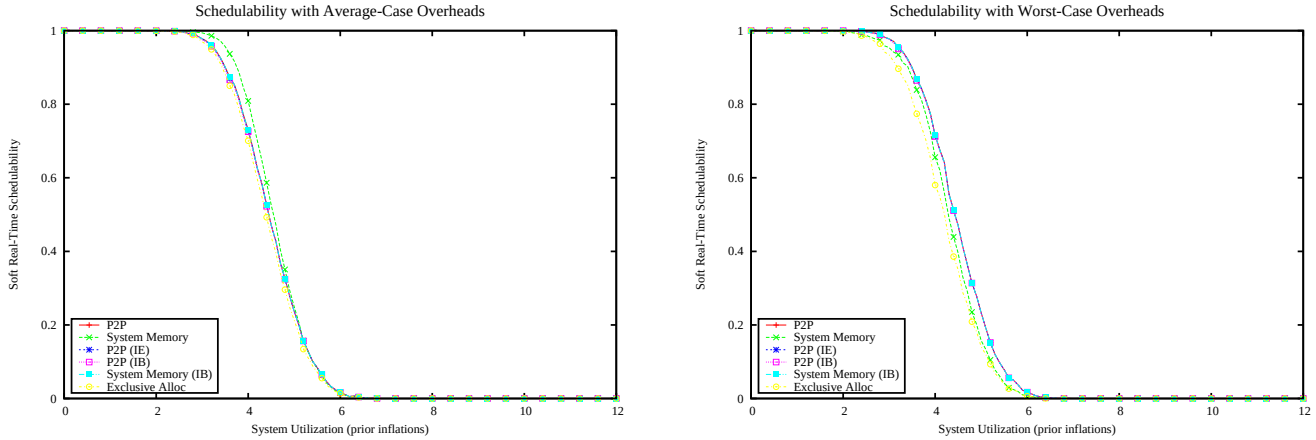

Figure 3820: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

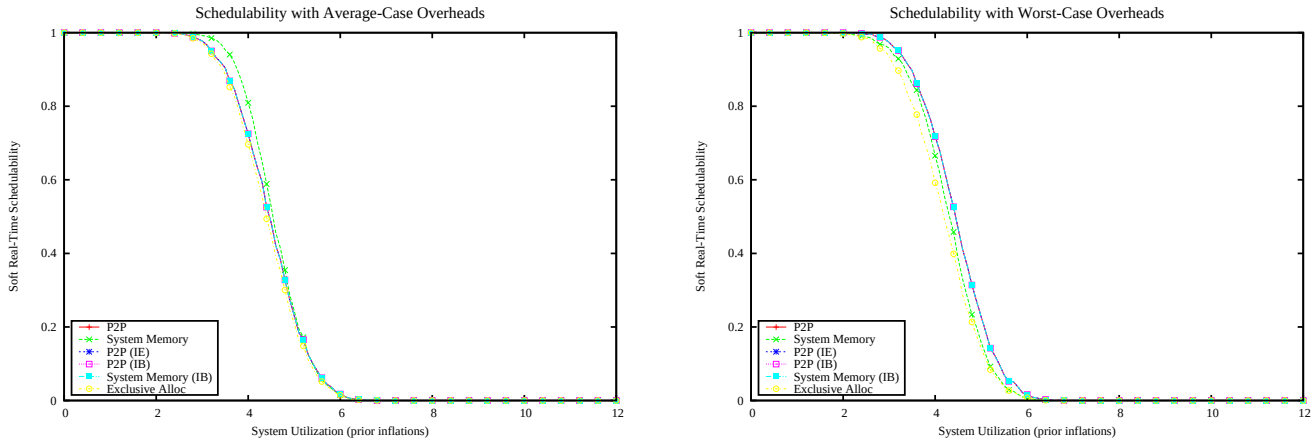

Figure 3821: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

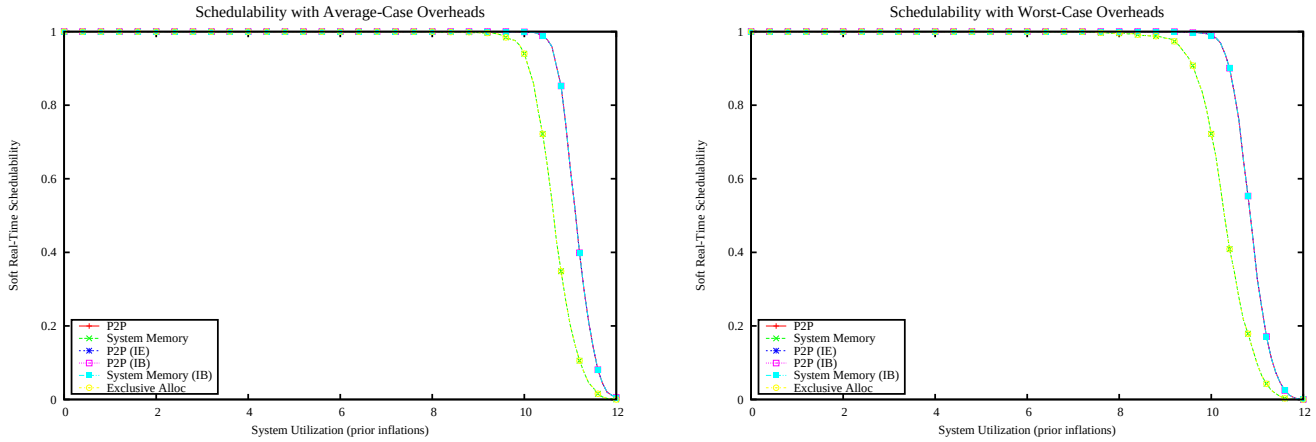

Figure 3822: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

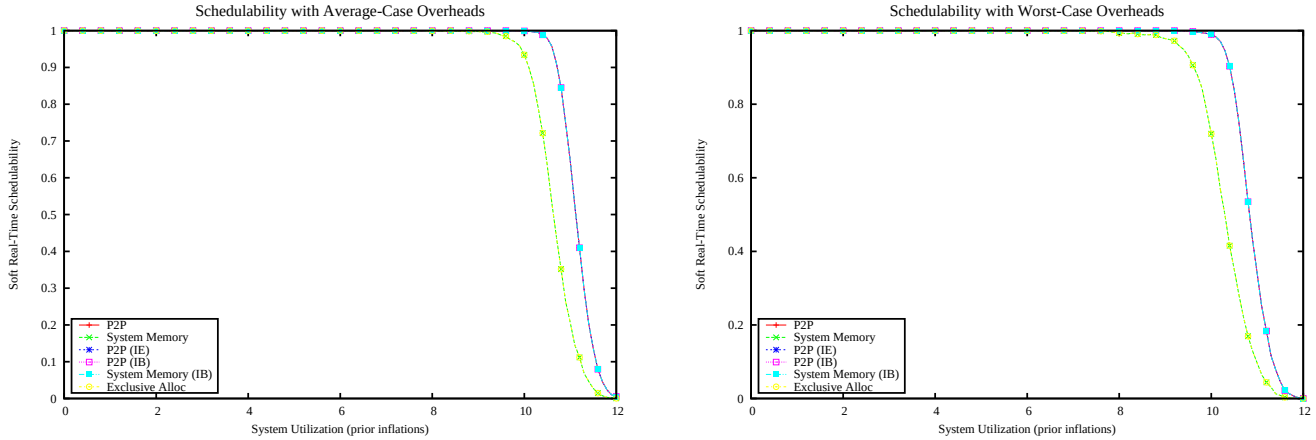

Figure 3823: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

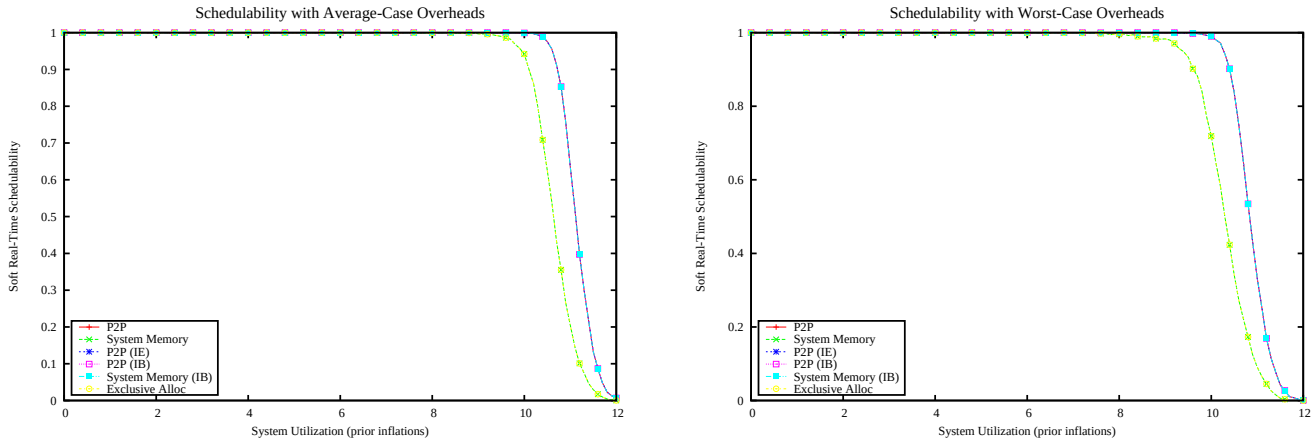

Figure 3824: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

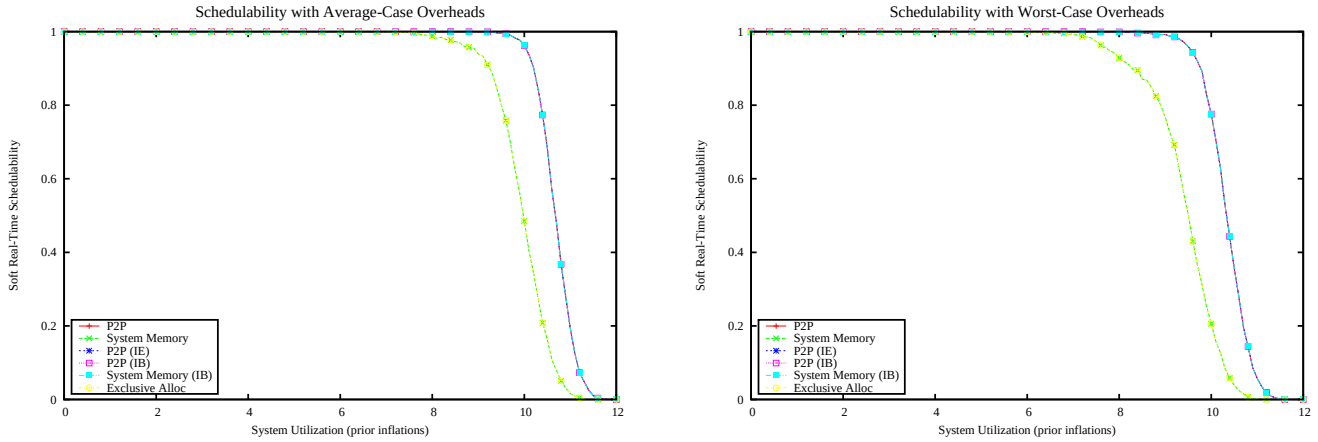

Figure 3825: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

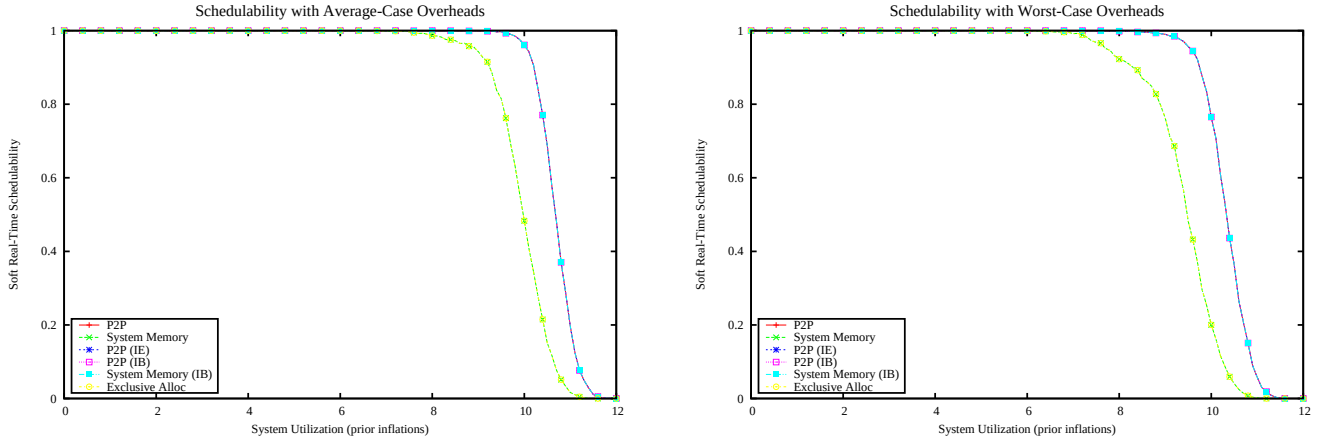

Figure 3826: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

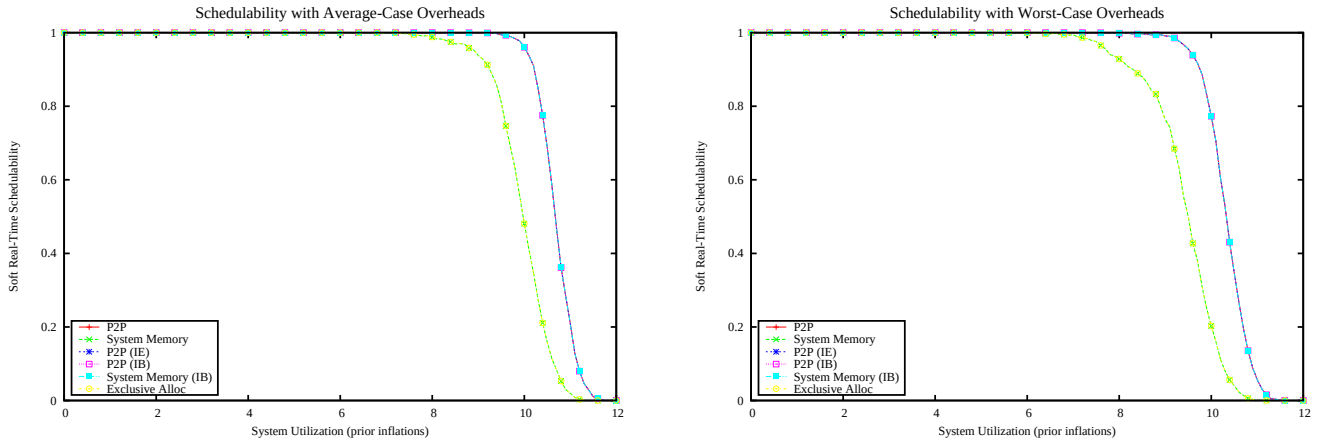

Figure 3827: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

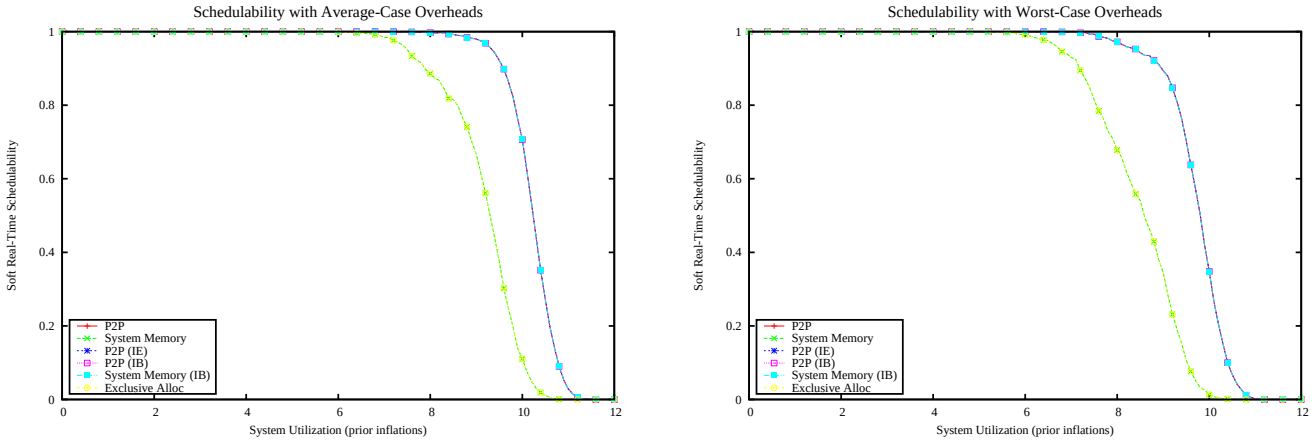

Figure 3828: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

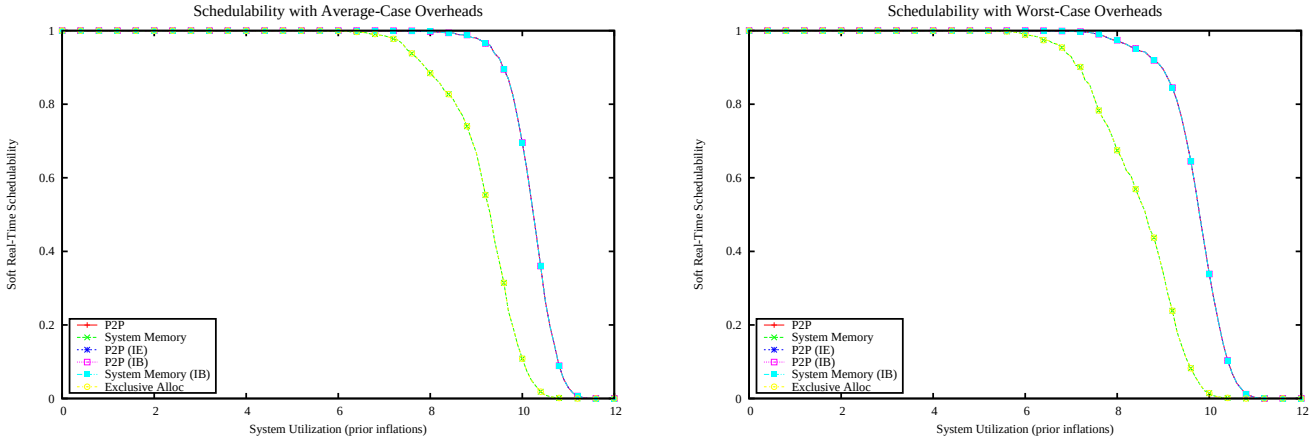

Figure 3829: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

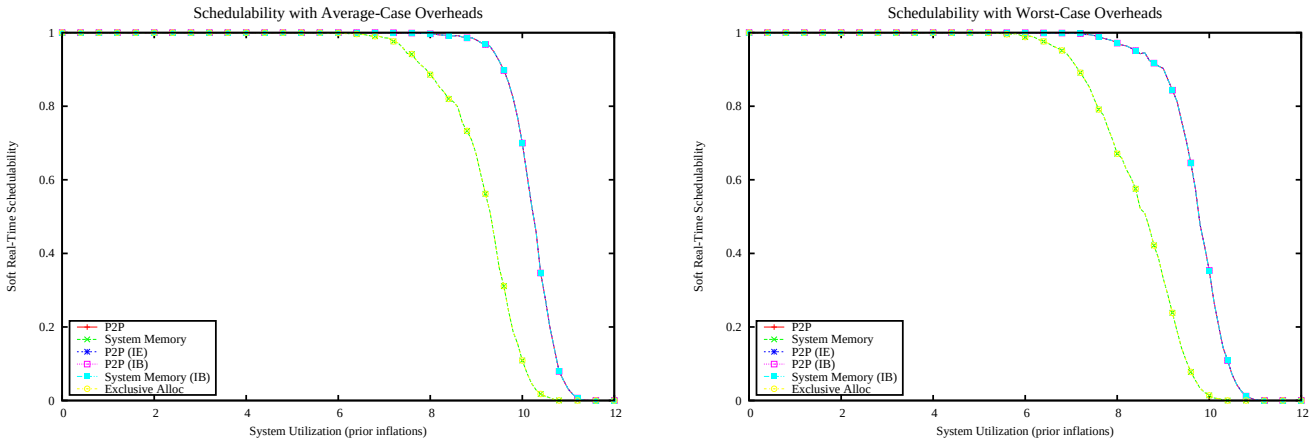

Figure 3830: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

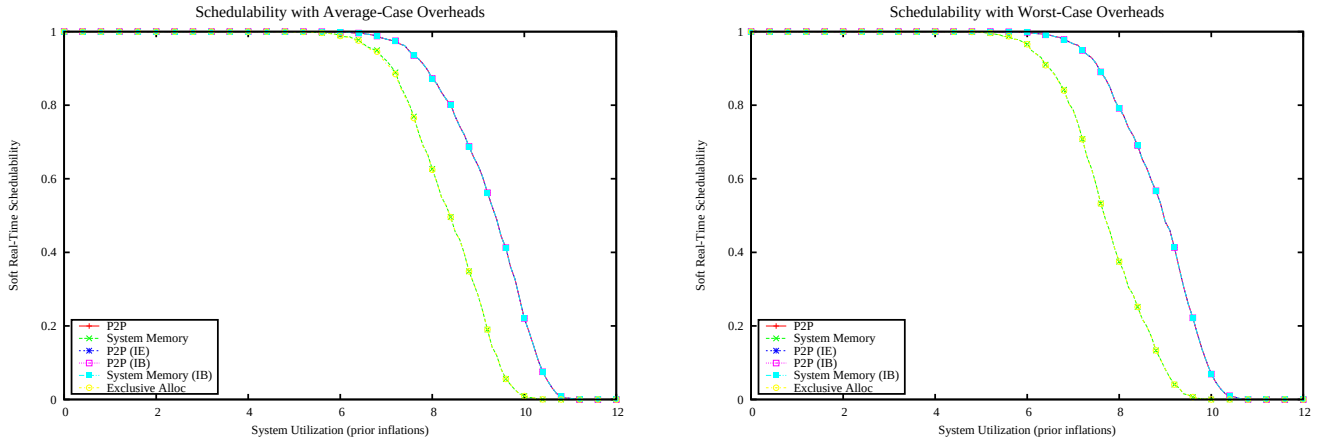

Figure 3831: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

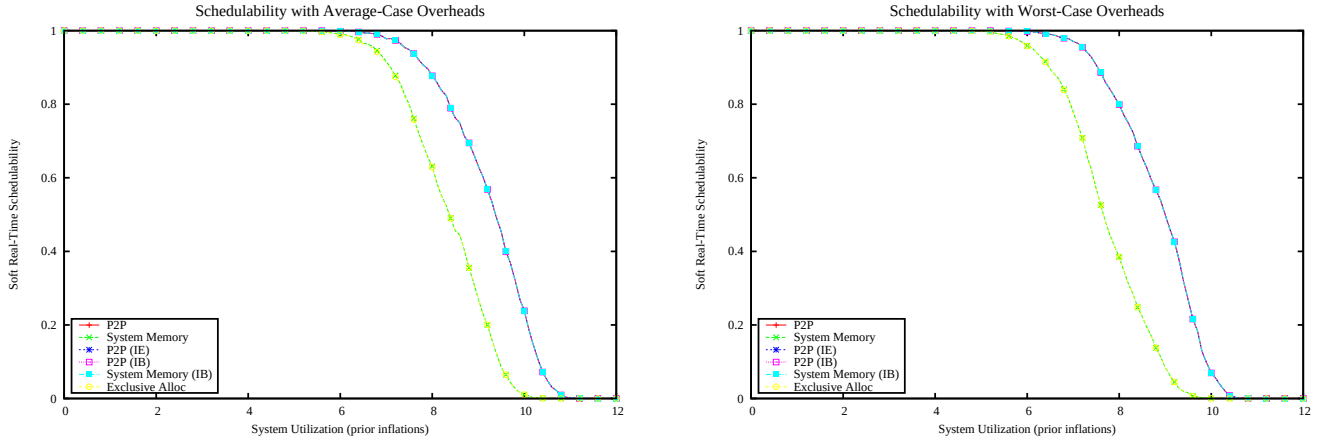

Figure 3832: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

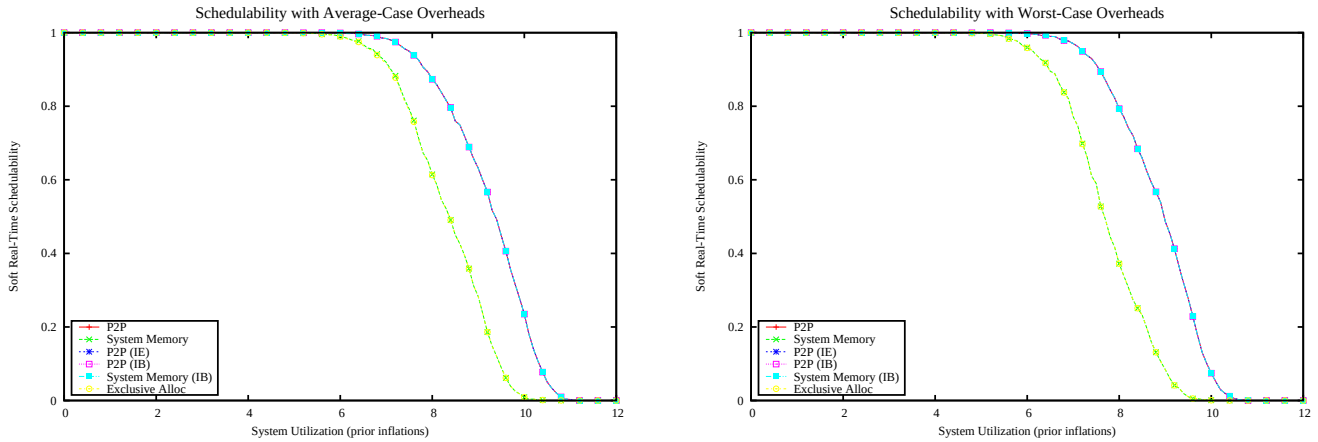

Figure 3833: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

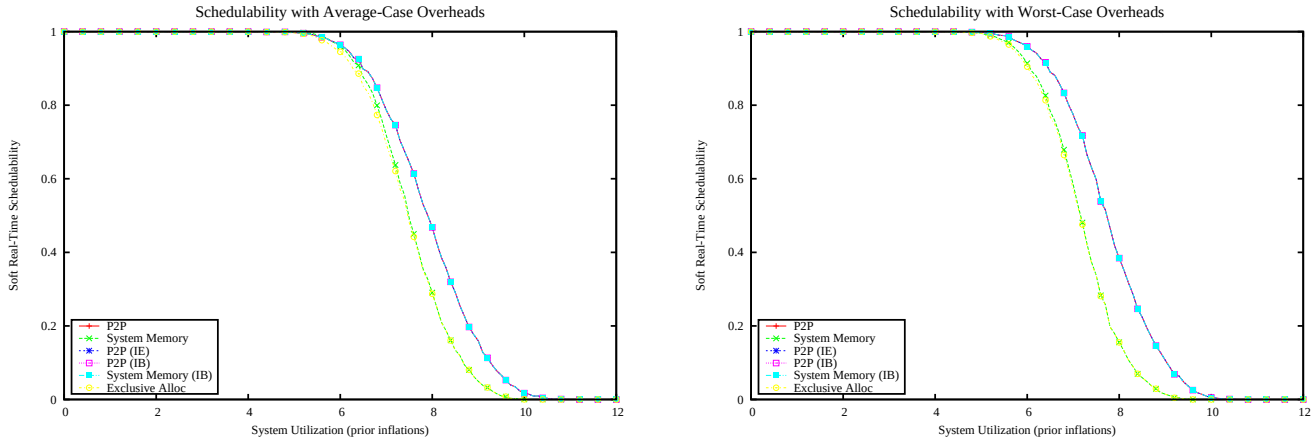

Figure 3834: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

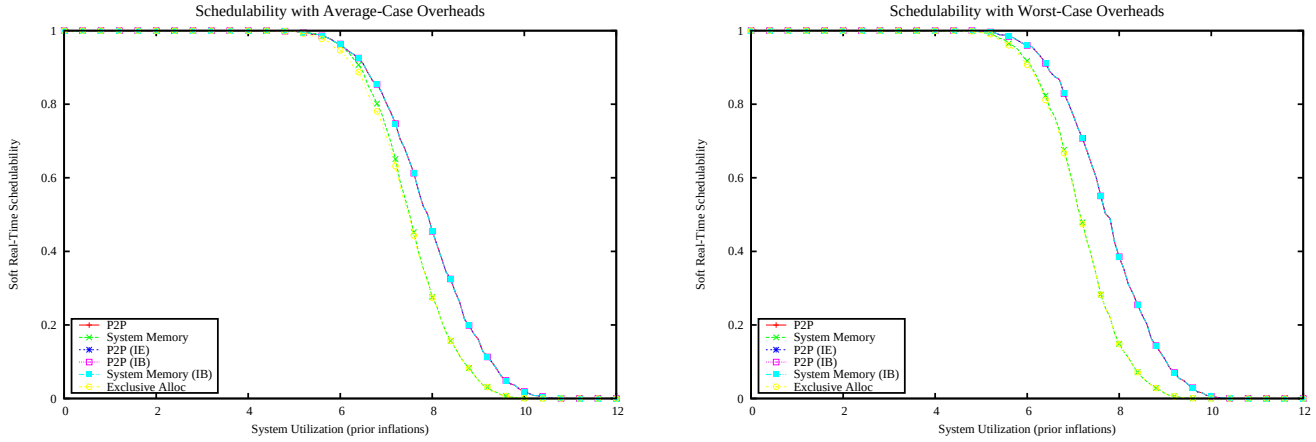

Figure 3835: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

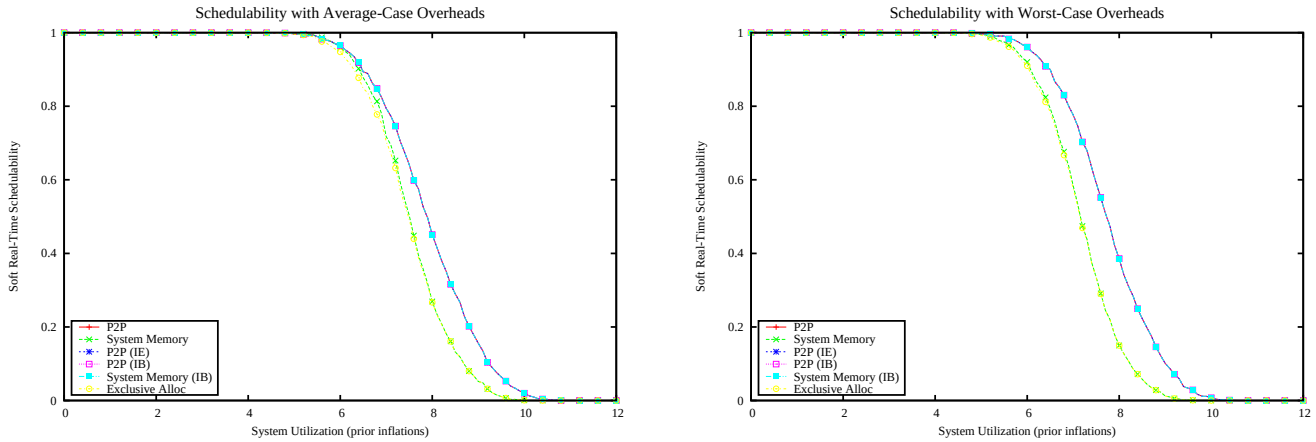

Figure 3836: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

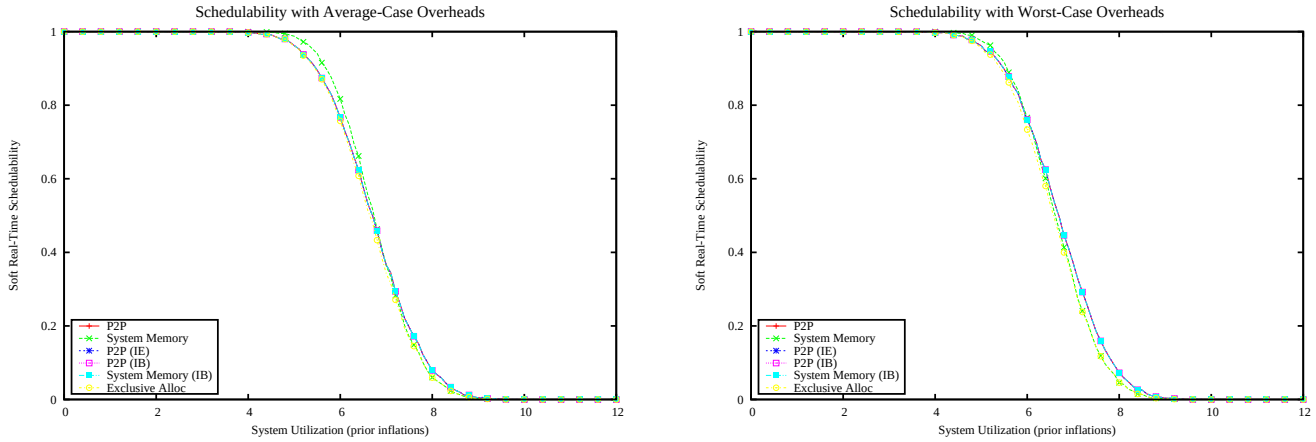

Figure 3837: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

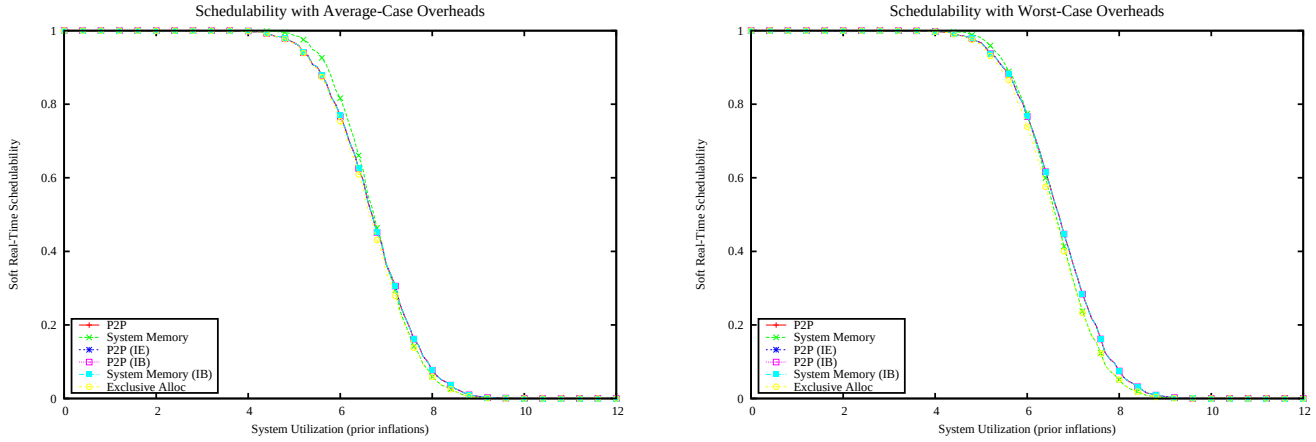

Figure 3838: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

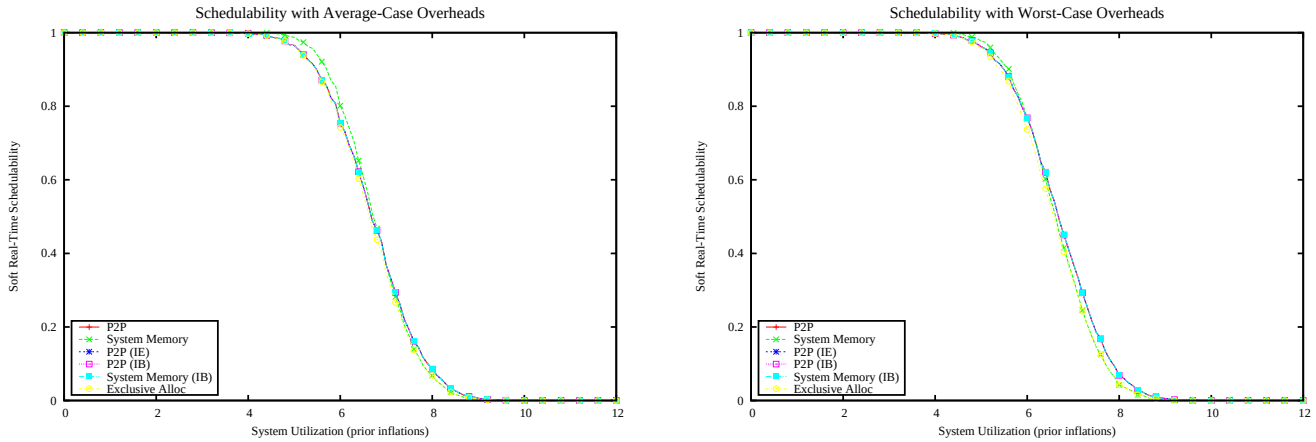

Figure 3839: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

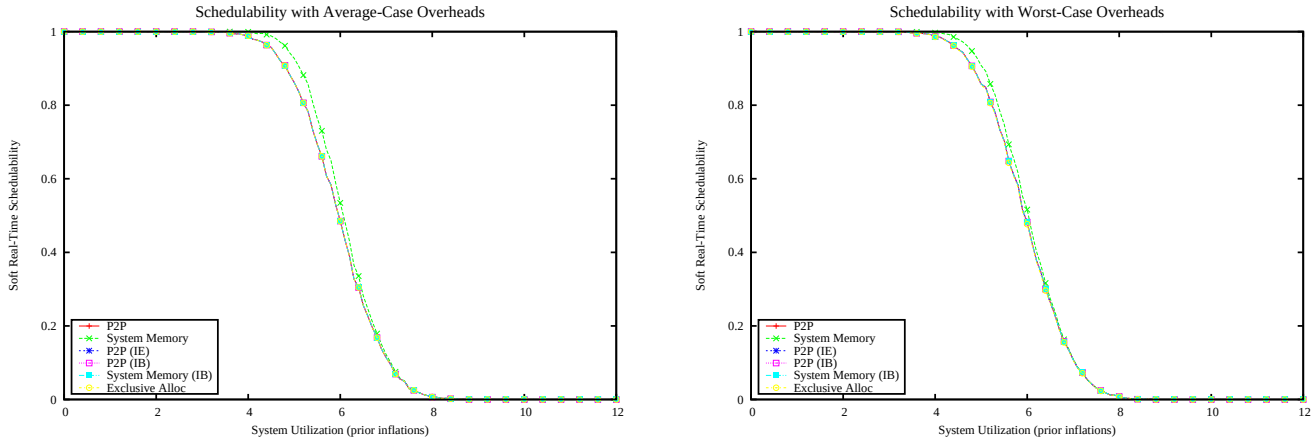

Figure 3840: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

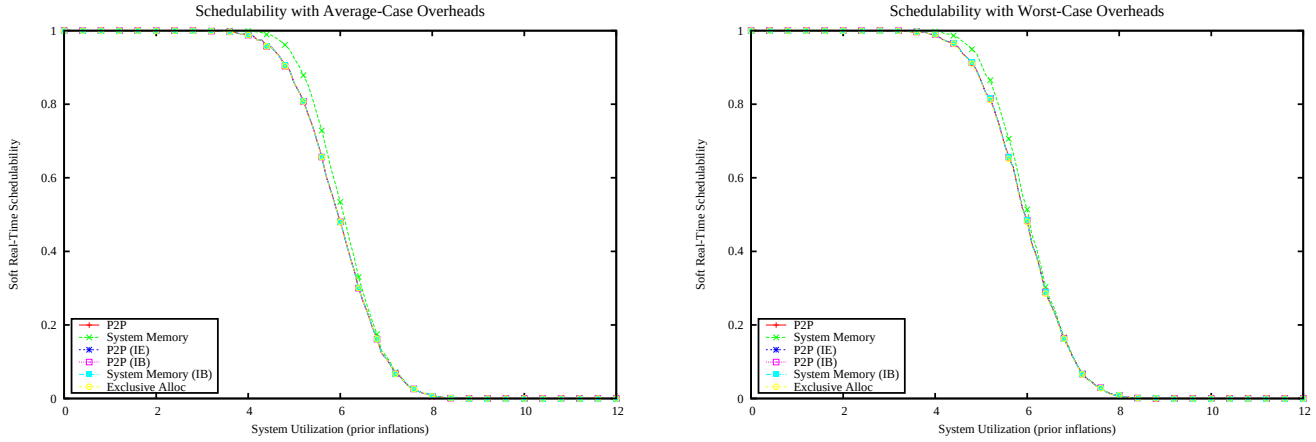

Figure 3841: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

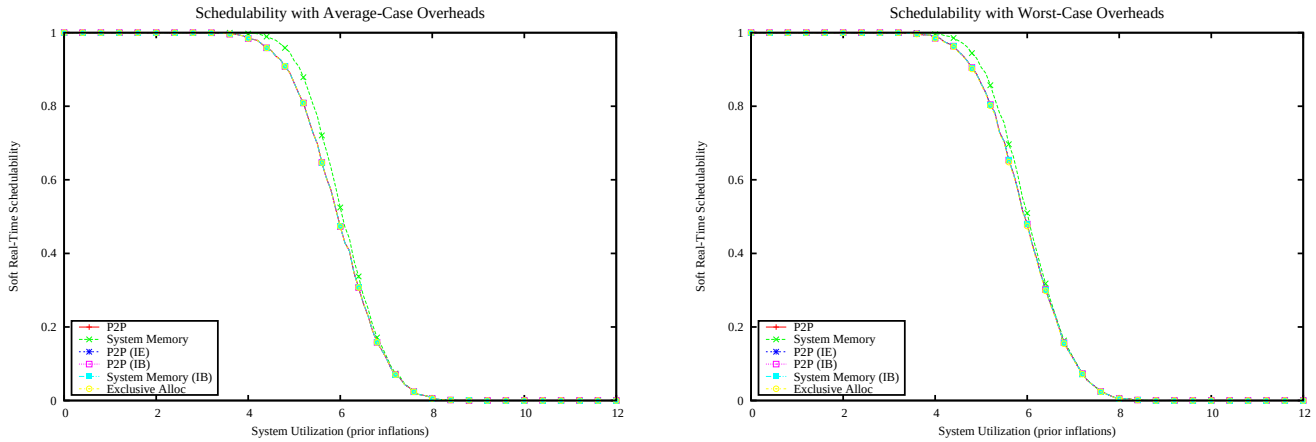

Figure 3842: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

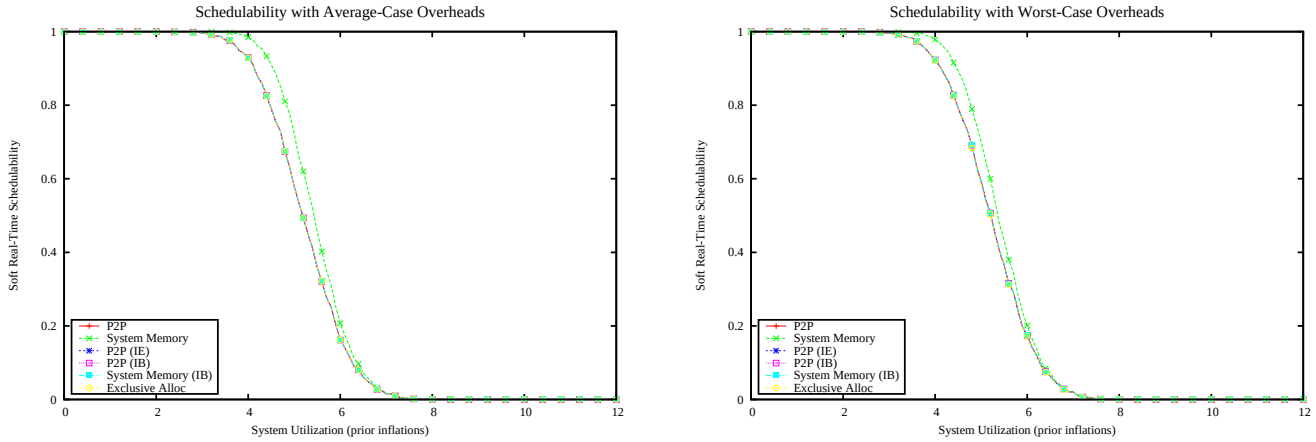

Figure 3843: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

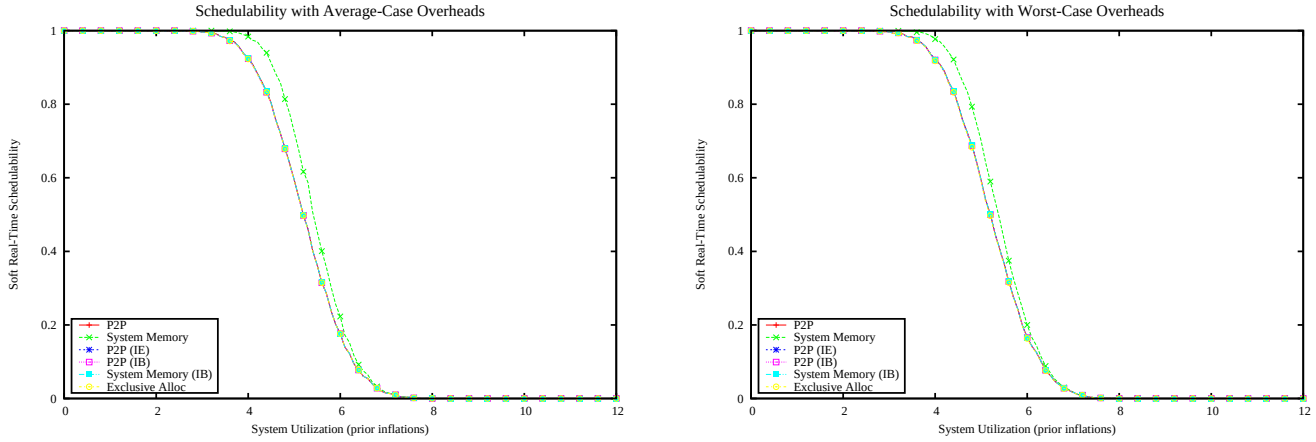

Figure 3844: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

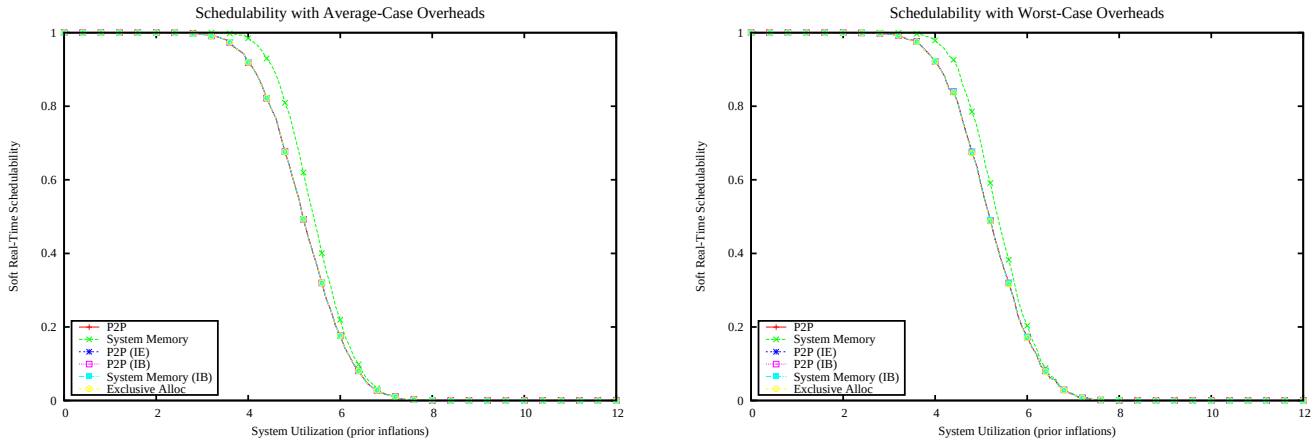

Figure 3845: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

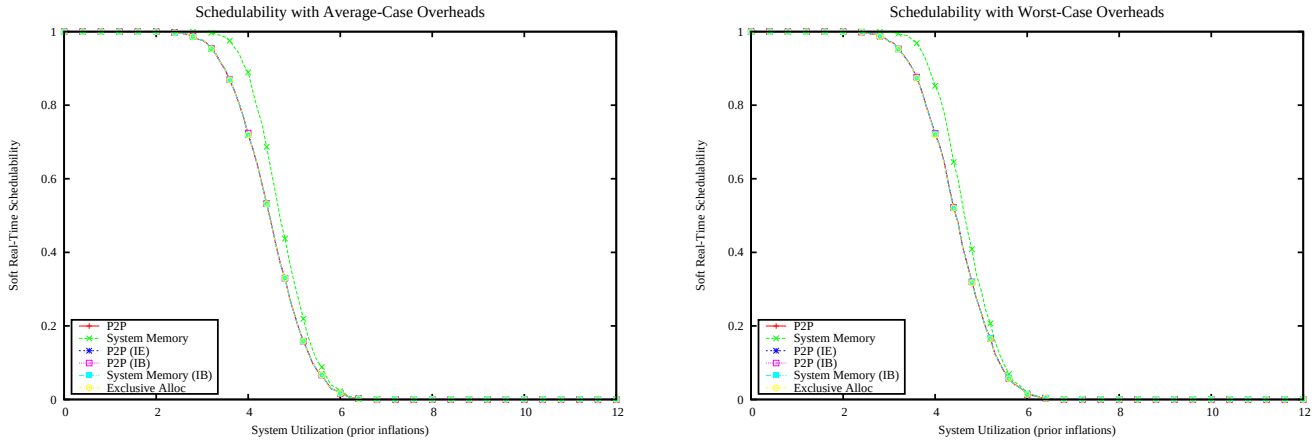

Figure 3846: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

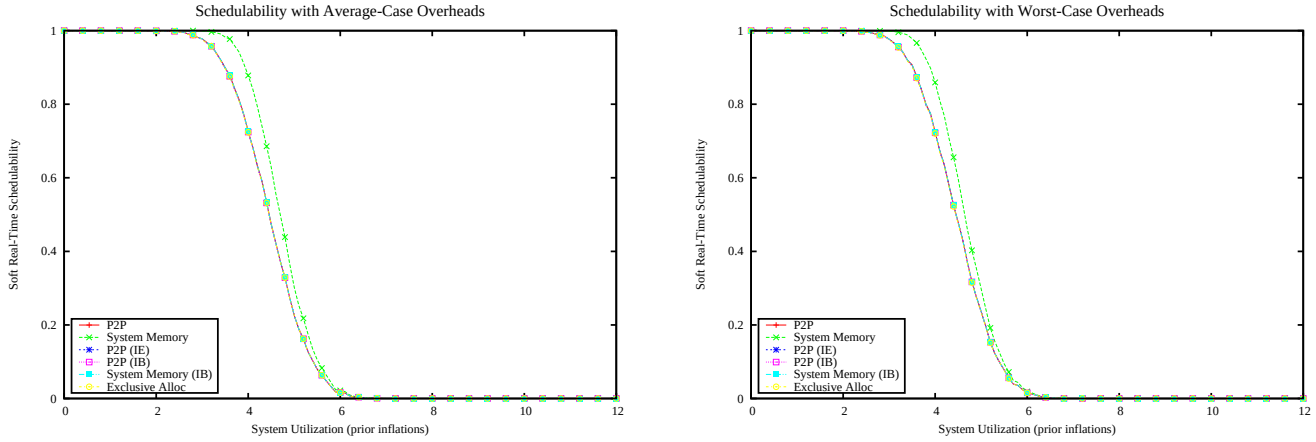

Figure 3847: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

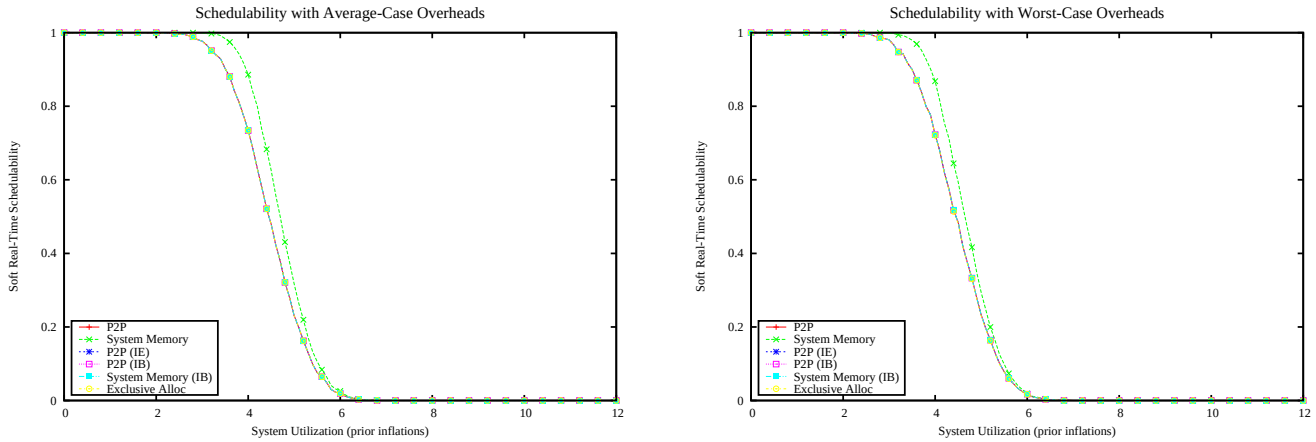

Figure 3848: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

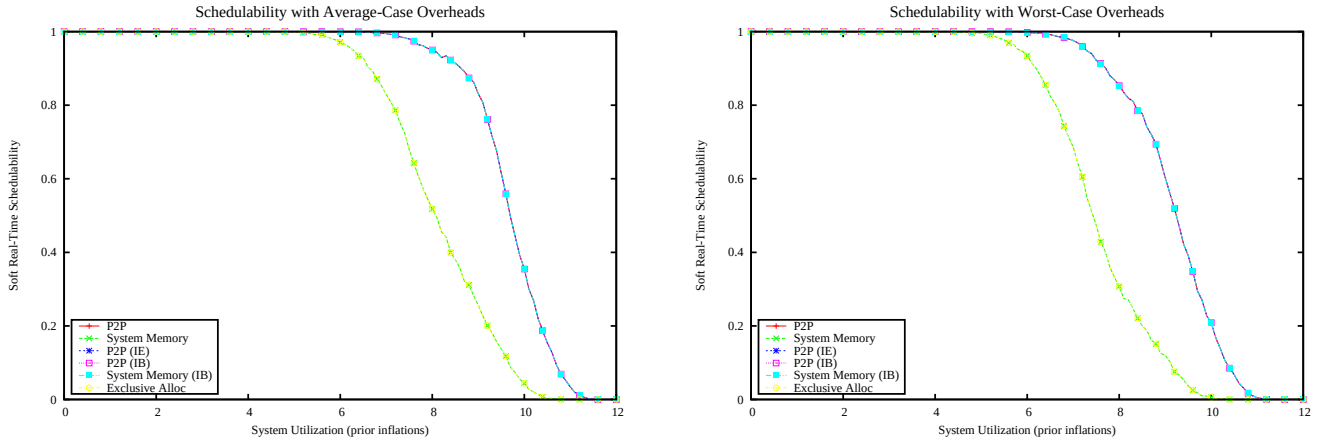

Figure 3849: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

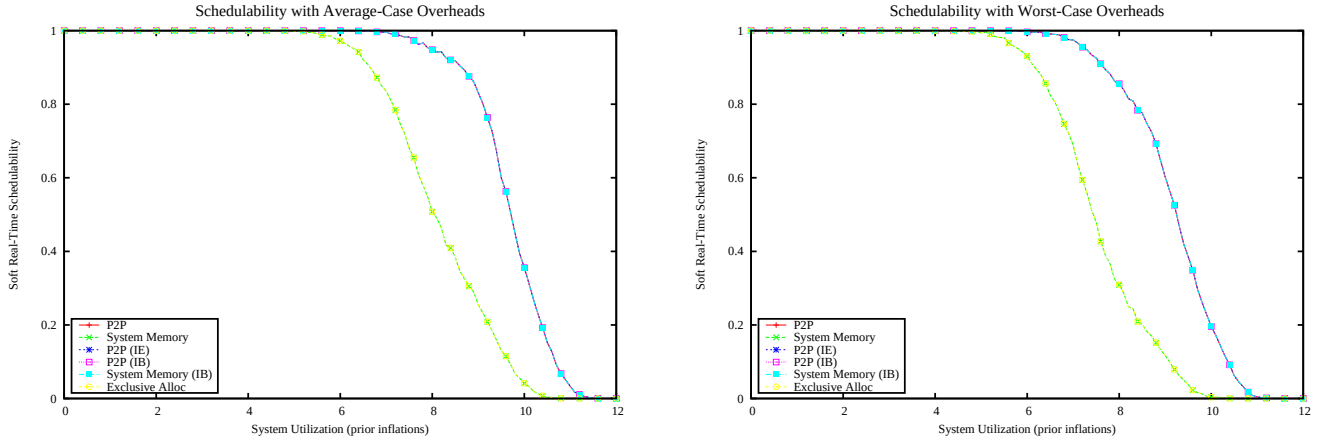

Figure 3850: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

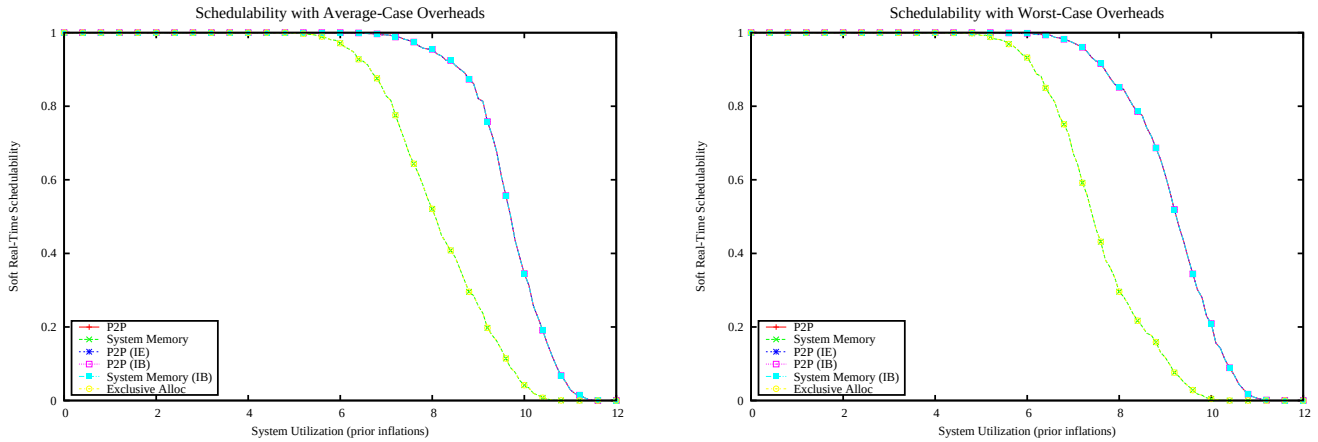

Figure 3851: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

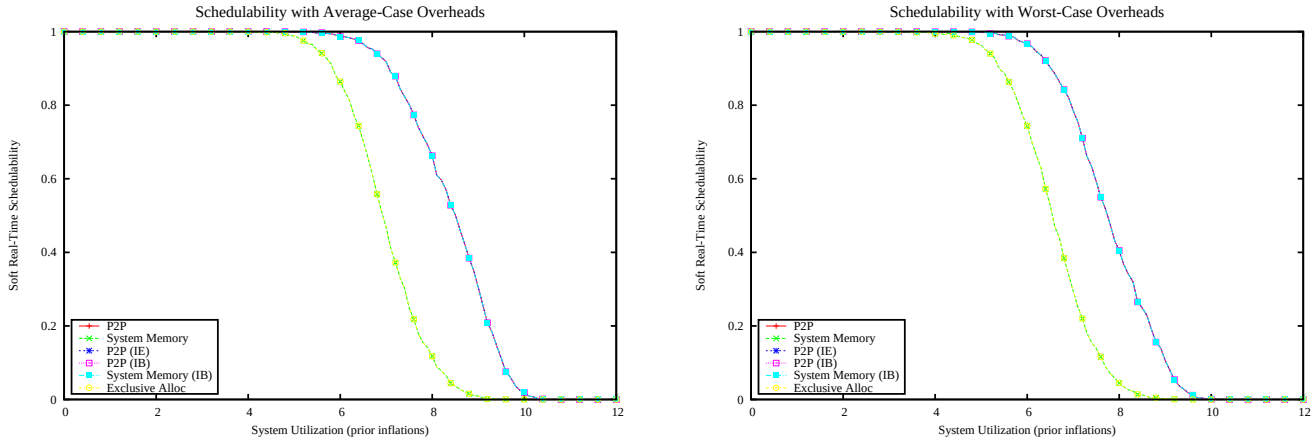

Figure 3852: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

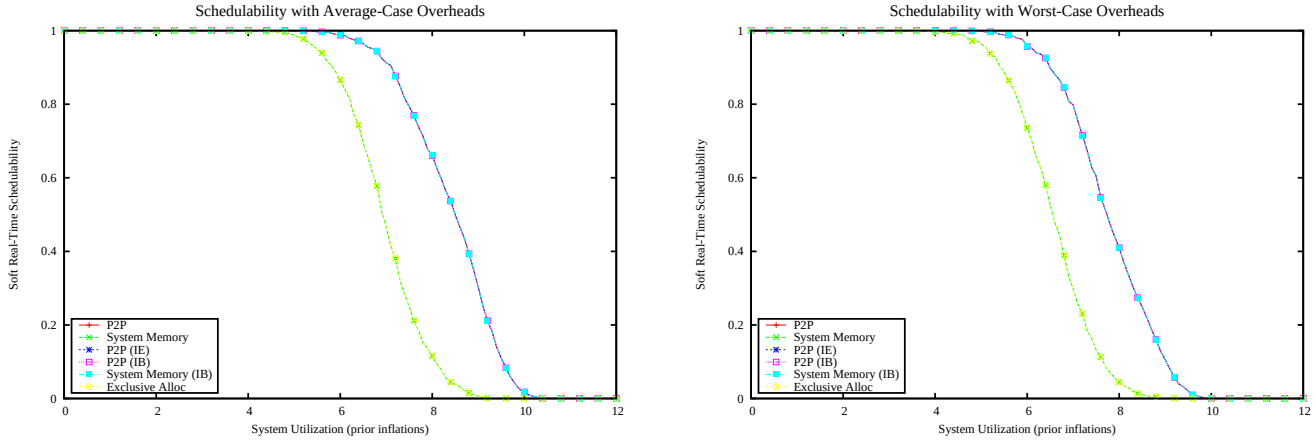

Figure 3853: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

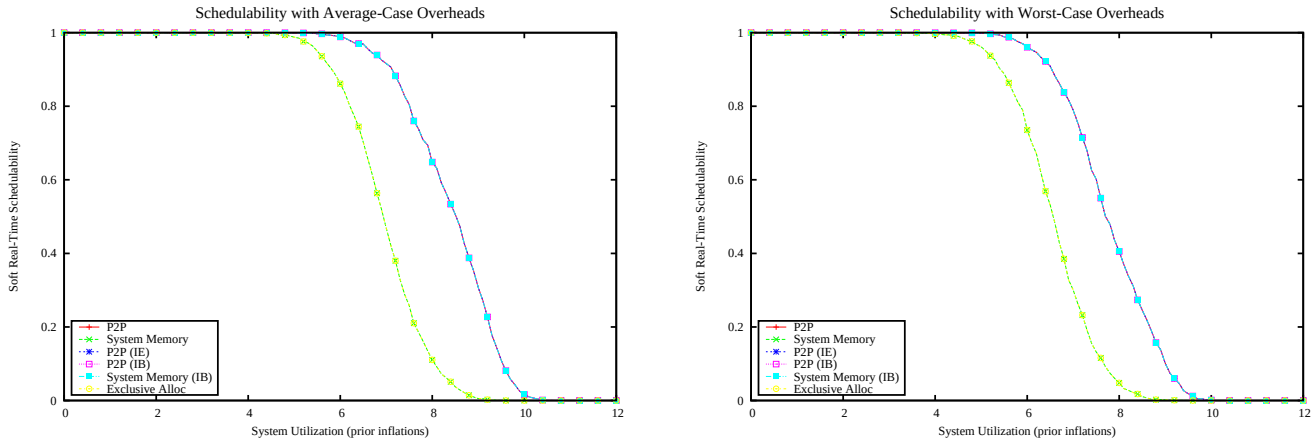

Figure 3854: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

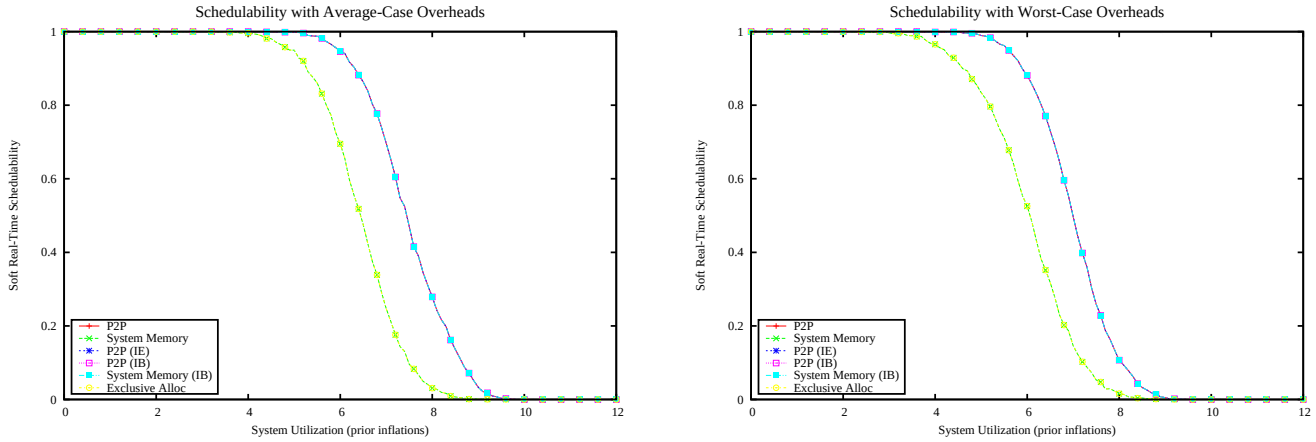

Figure 3855: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

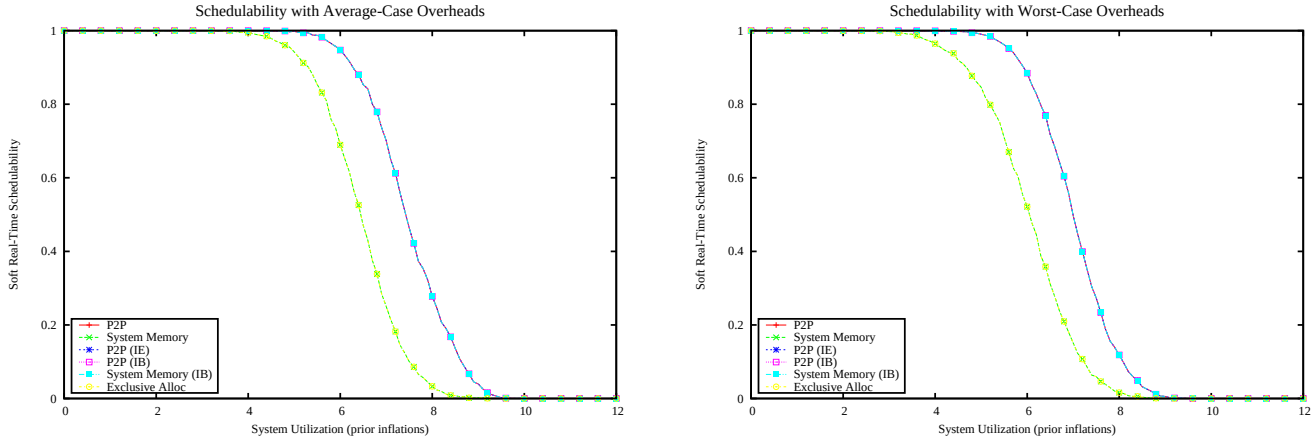

Figure 3856: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

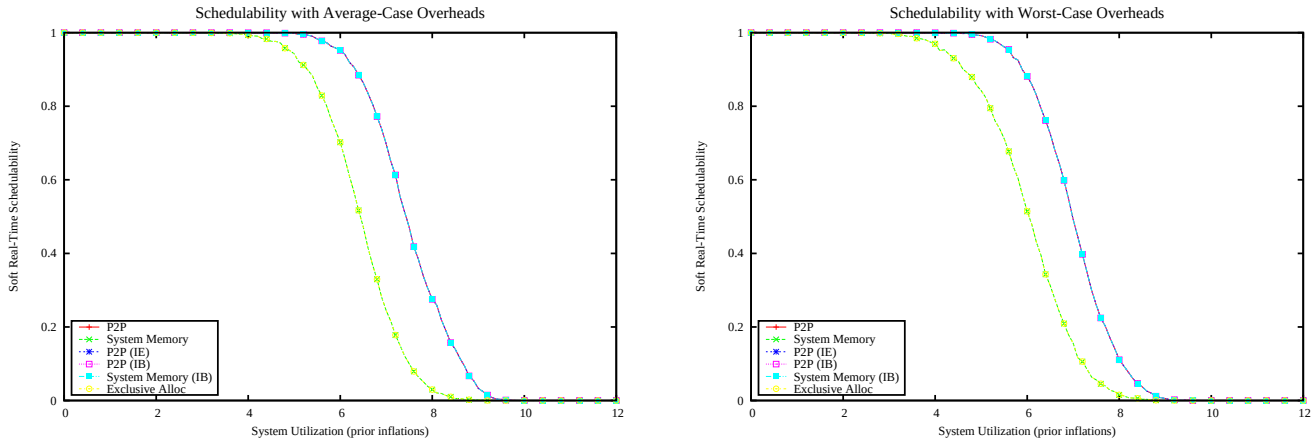

Figure 3857: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

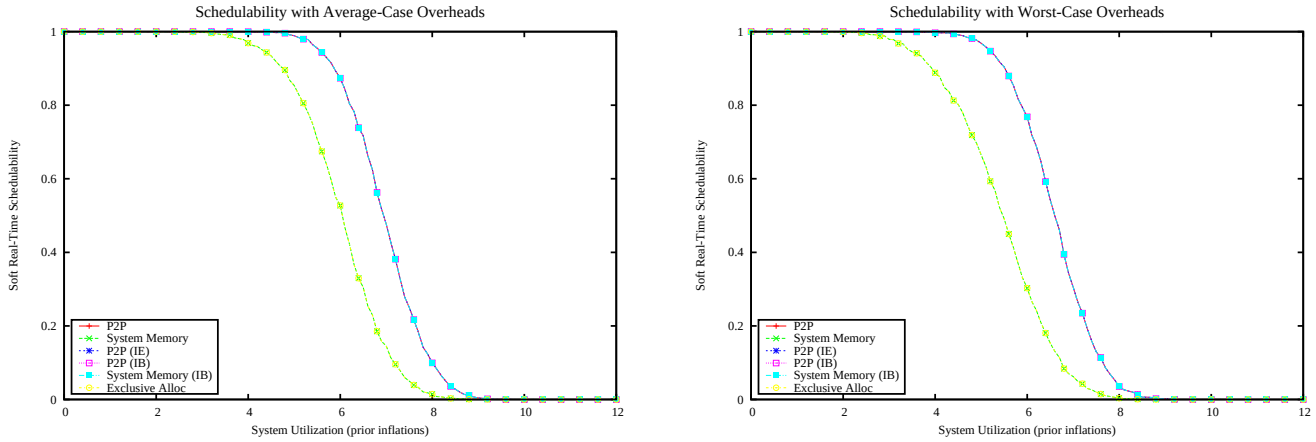

Figure 3858: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

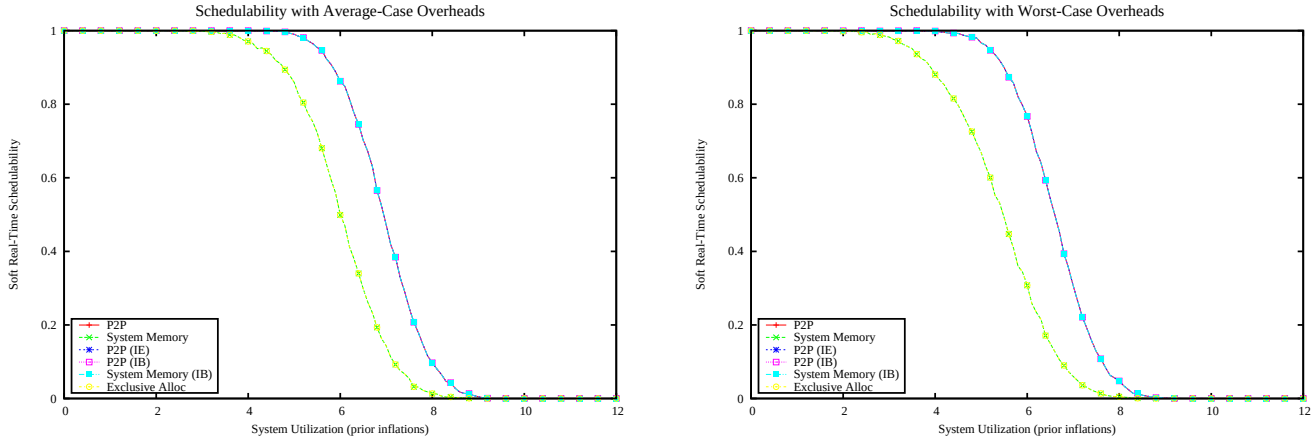

Figure 3859: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

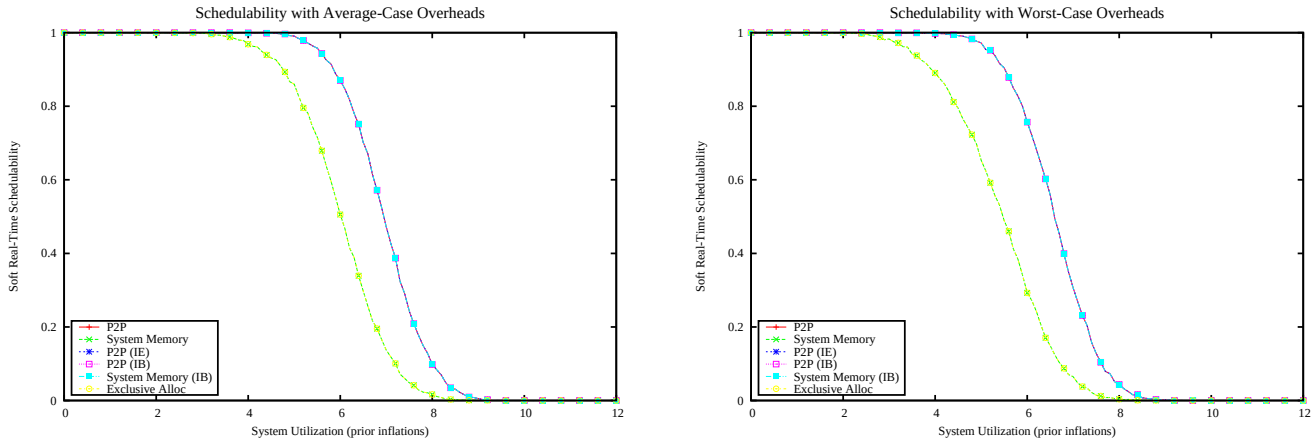

Figure 3860: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

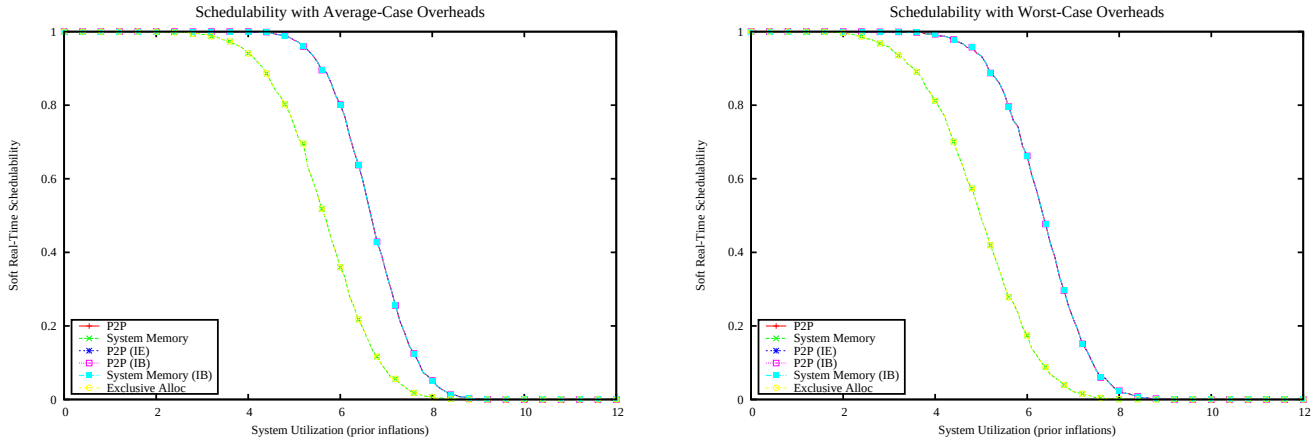

Figure 3861: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

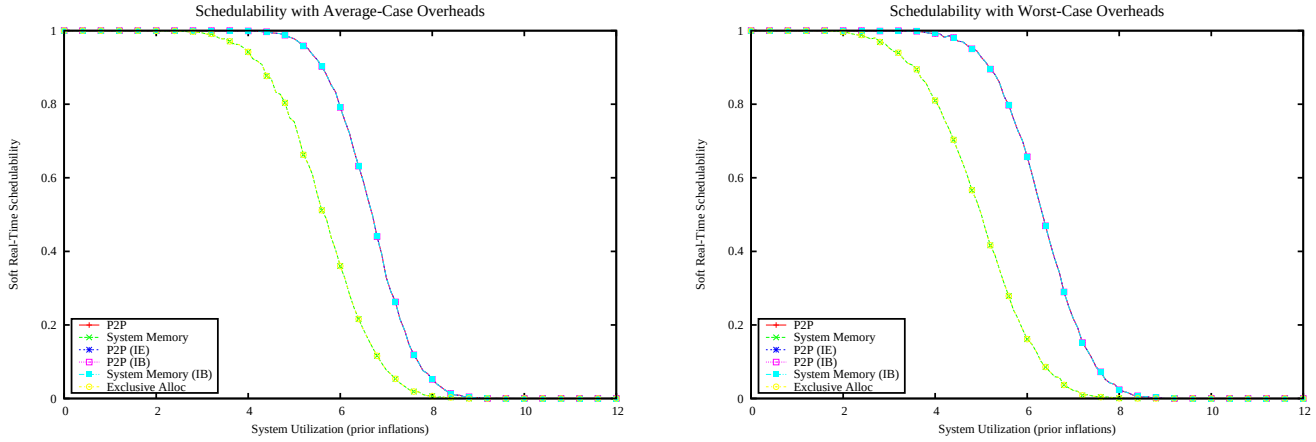

Figure 3862: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

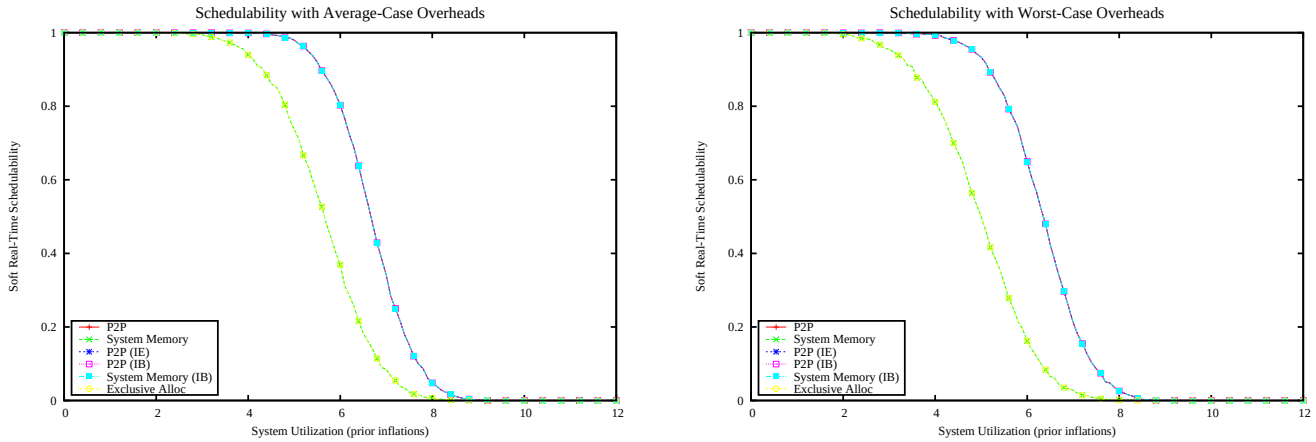

Figure 3863: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

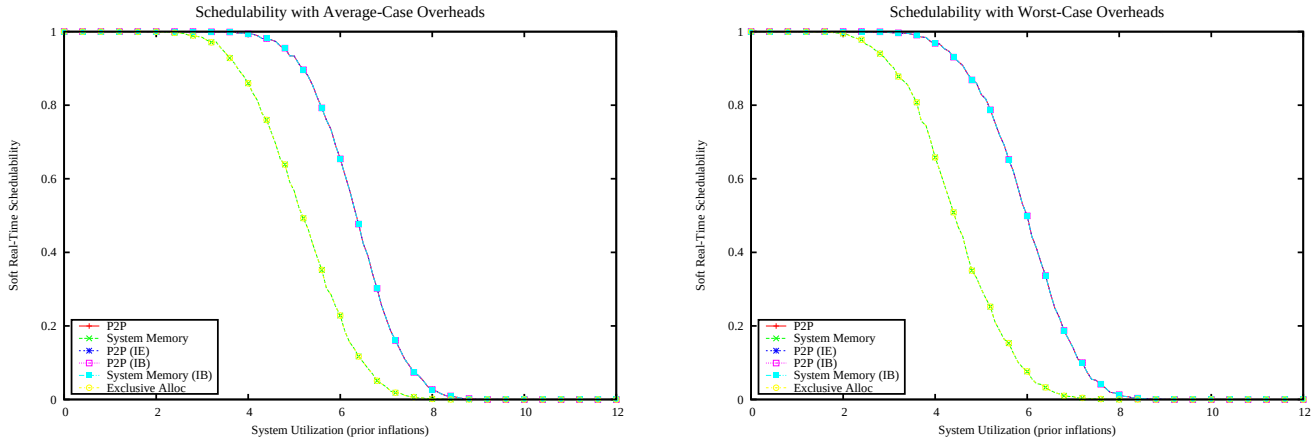

Figure 3864: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

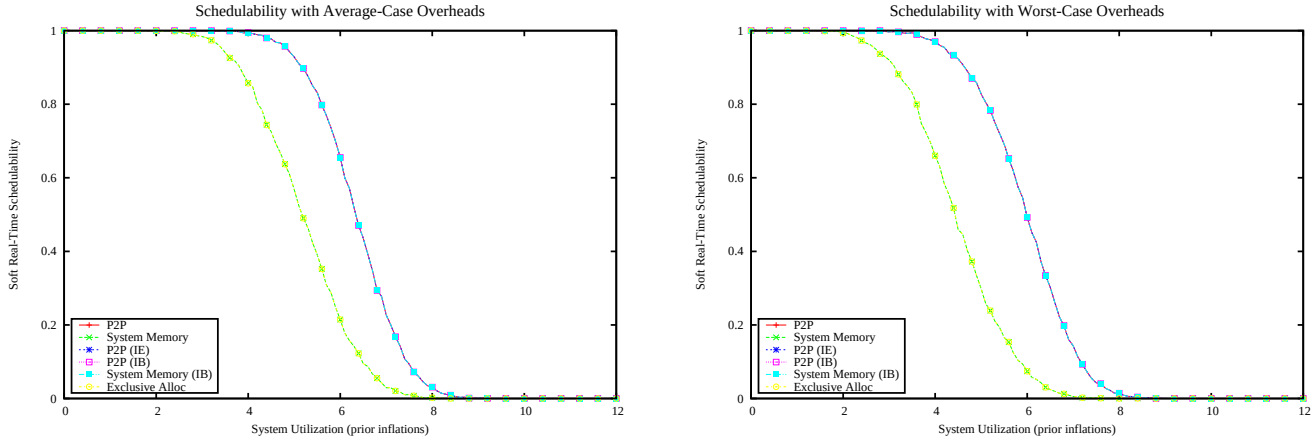

Figure 3865: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

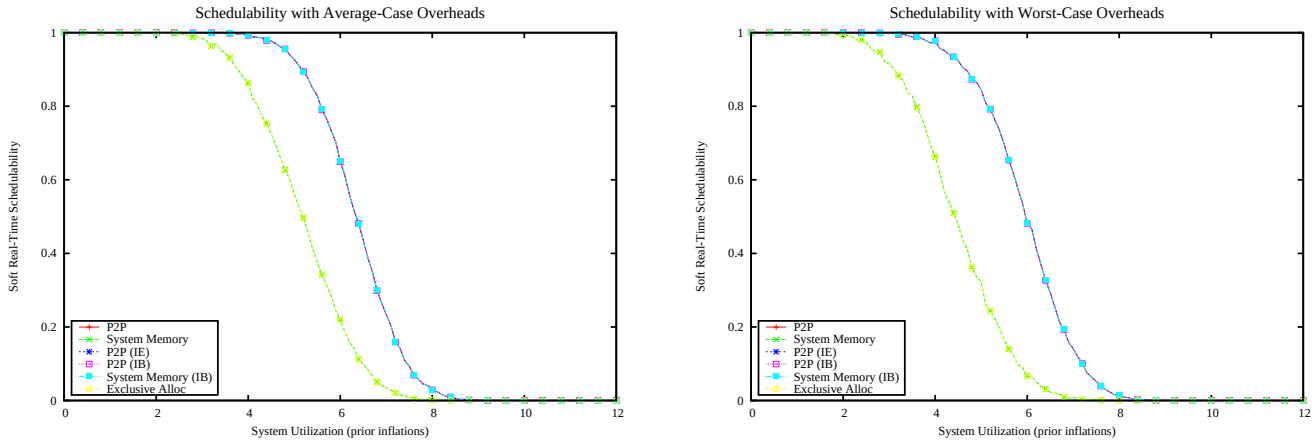

Figure 3866: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

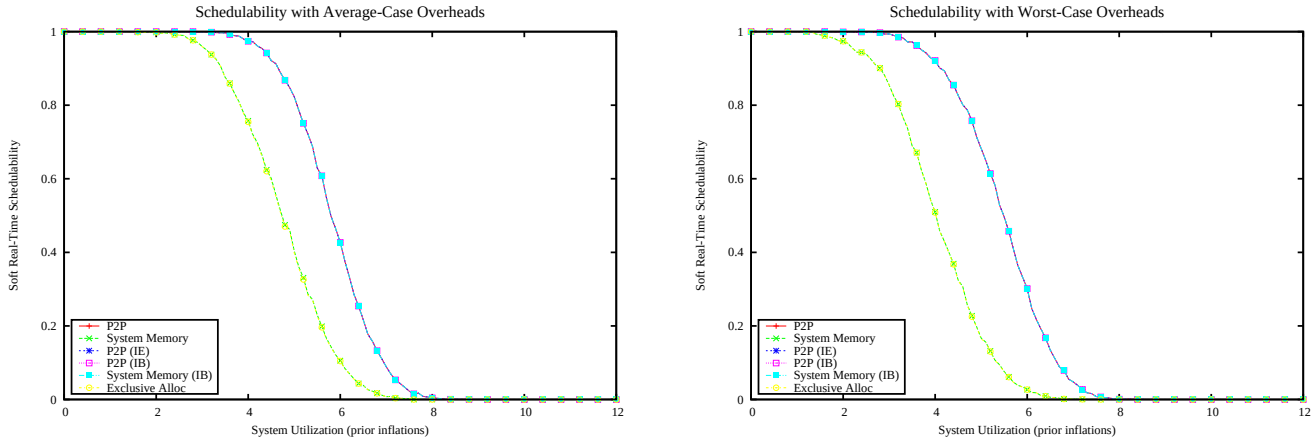

Figure 3867: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

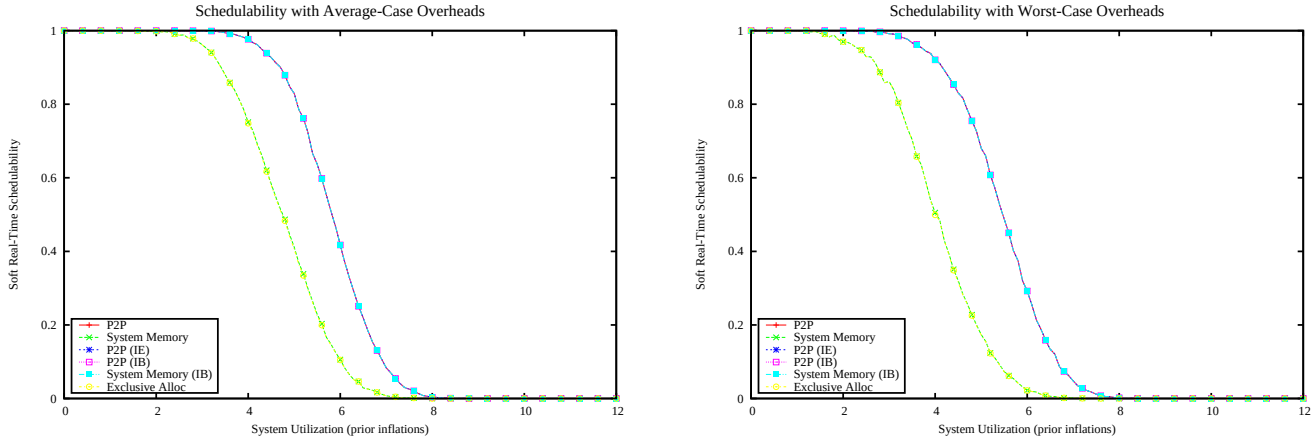

Figure 3868: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

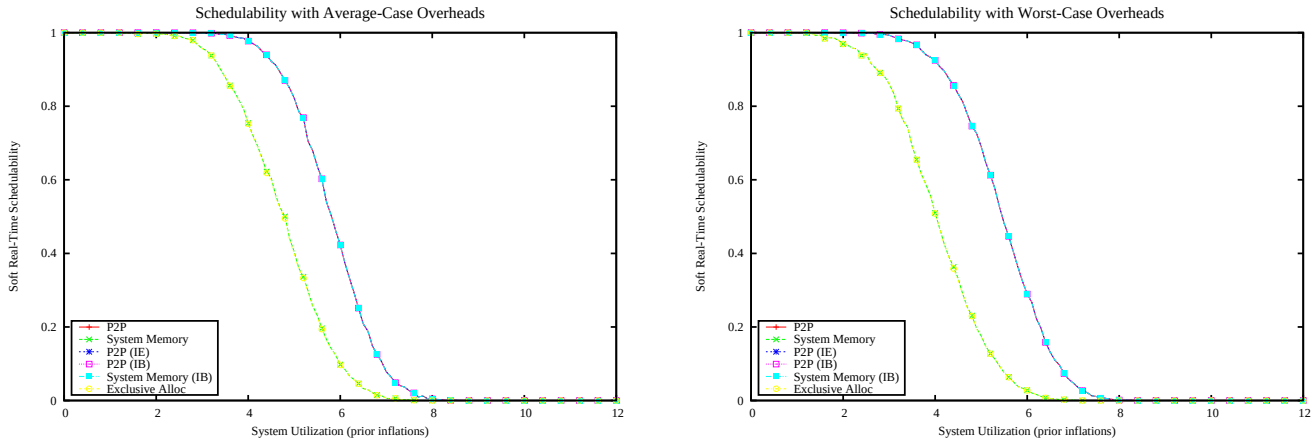

Figure 3869: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

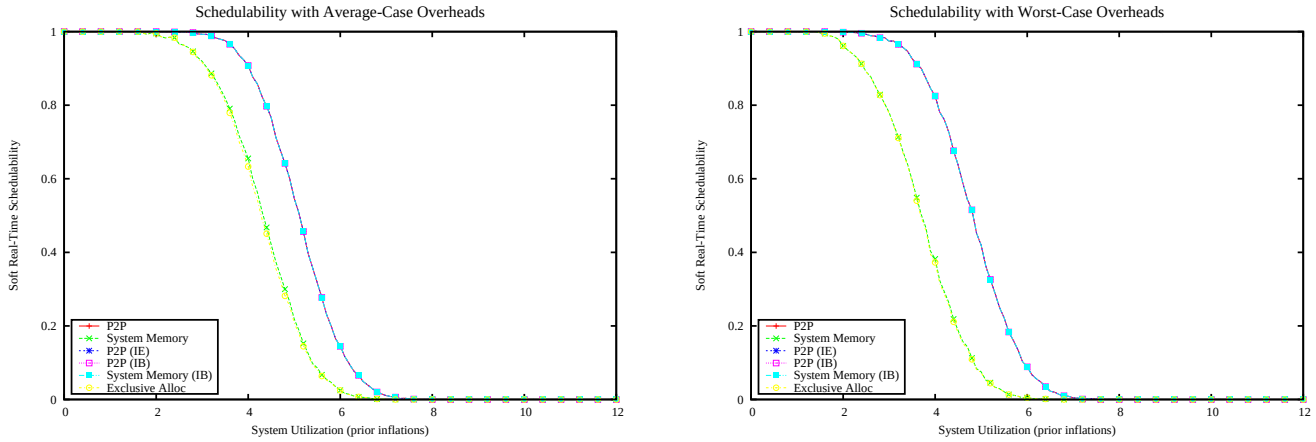

Figure 3870: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

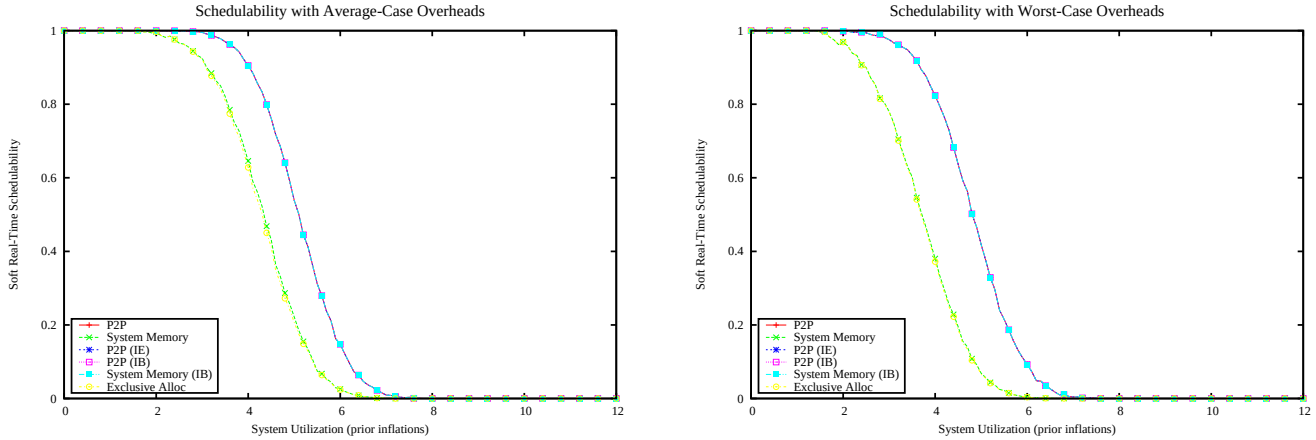

Figure 3871: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

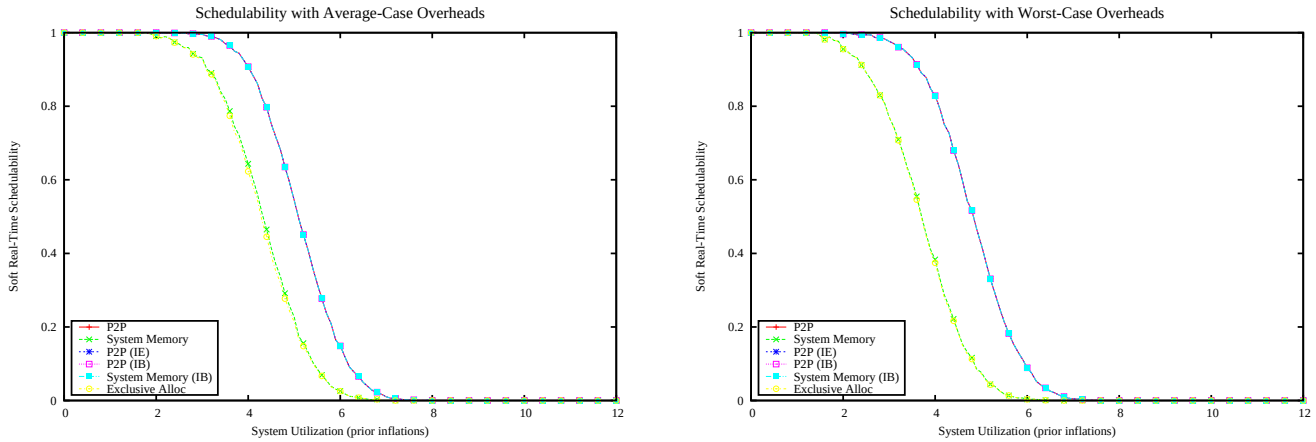

Figure 3872: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

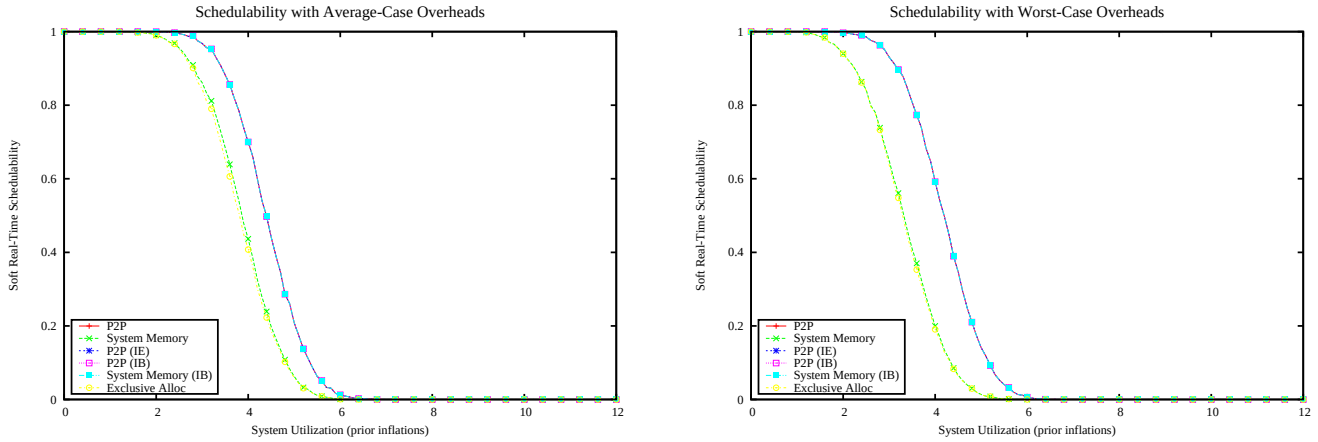

Figure 3873: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

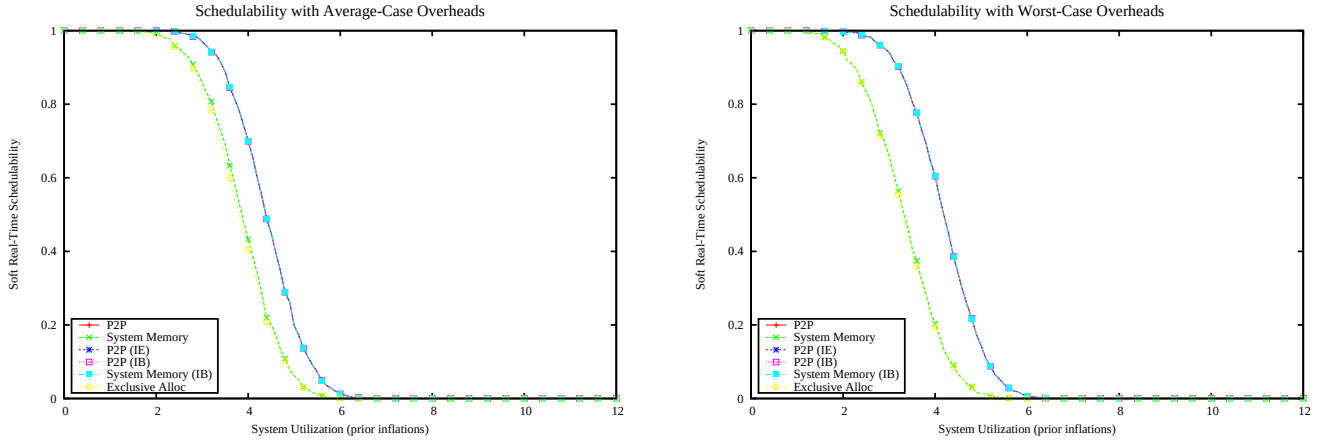

Figure 3874: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

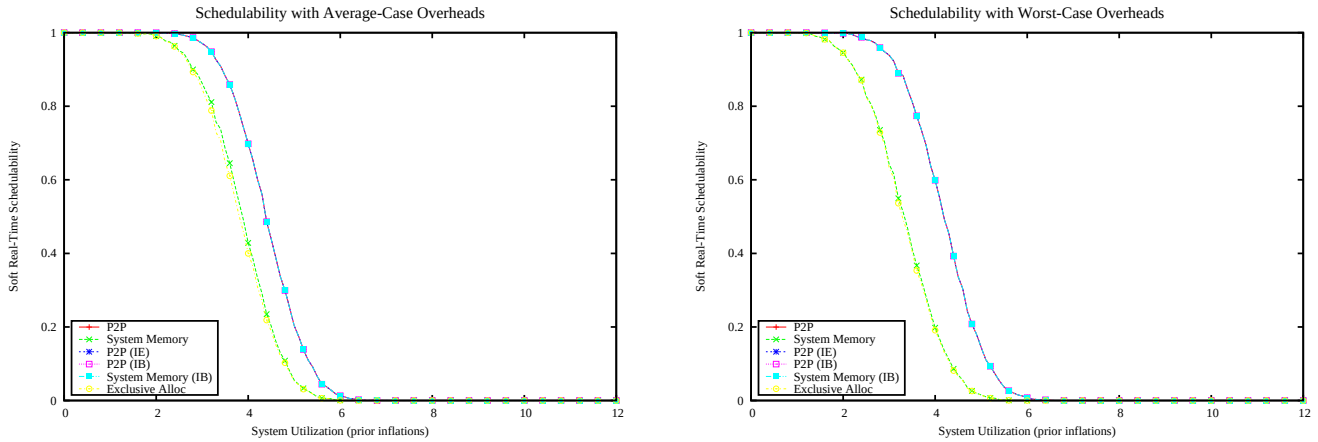

Figure 3875: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

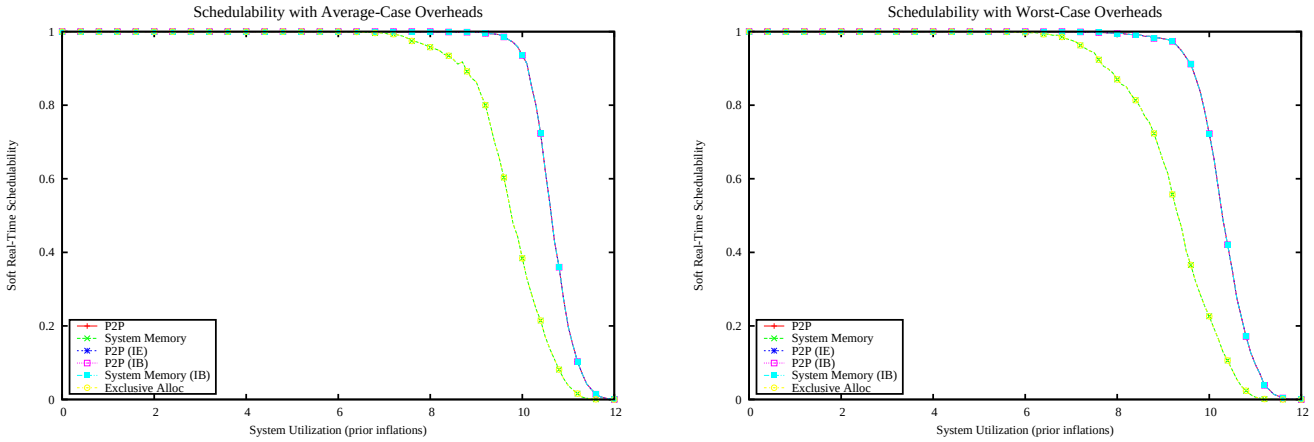

Figure 3876: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

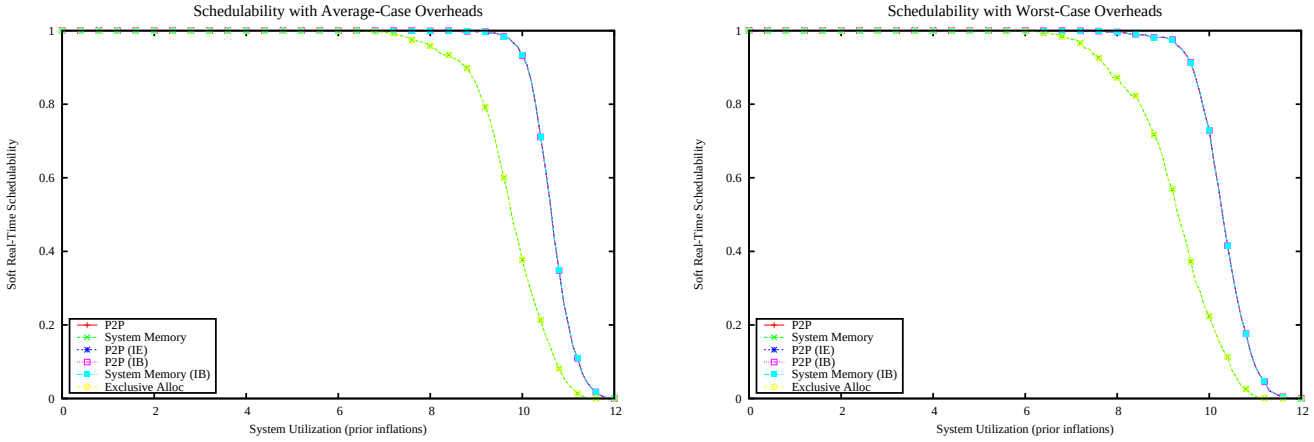

Figure 3877: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

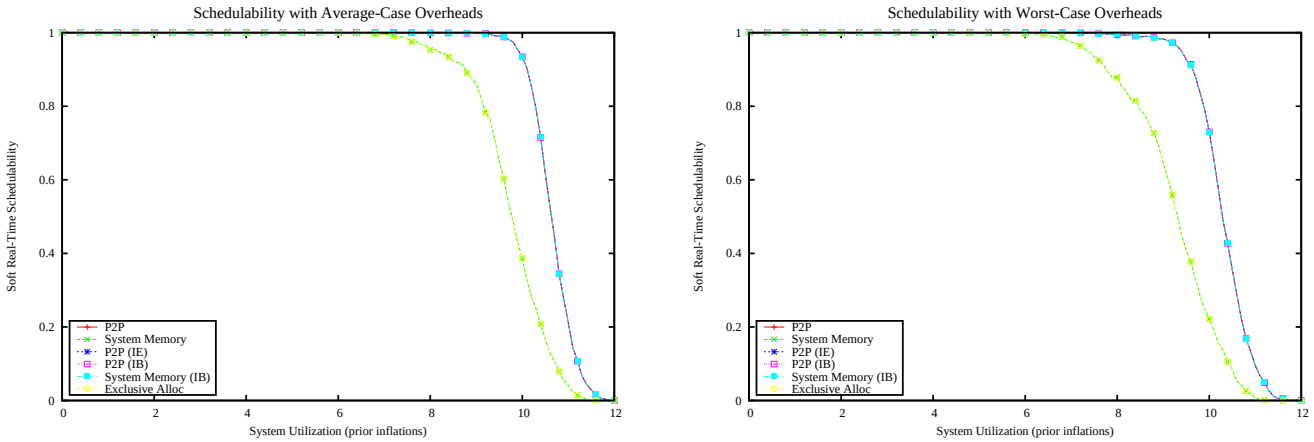

Figure 3878: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

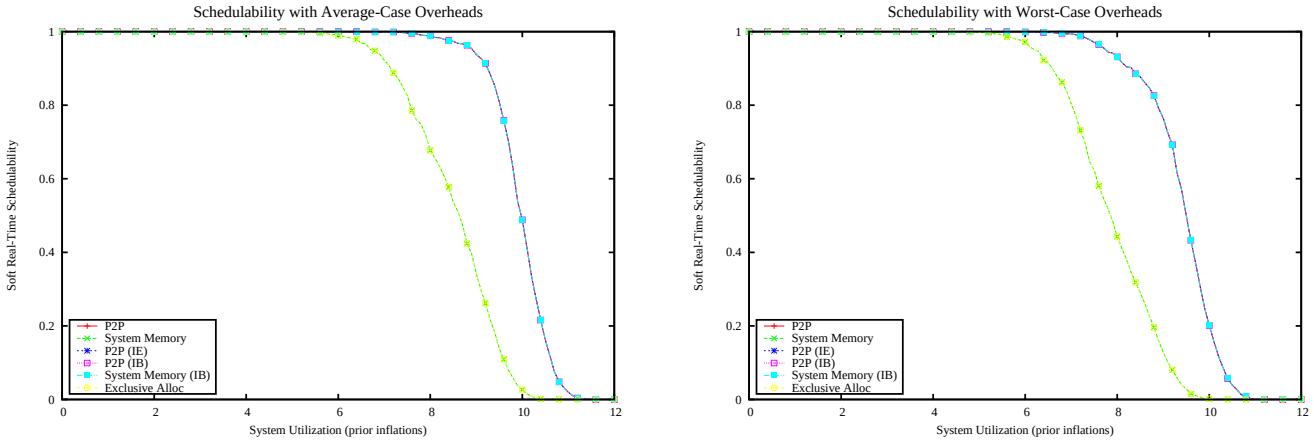

Figure 3879: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

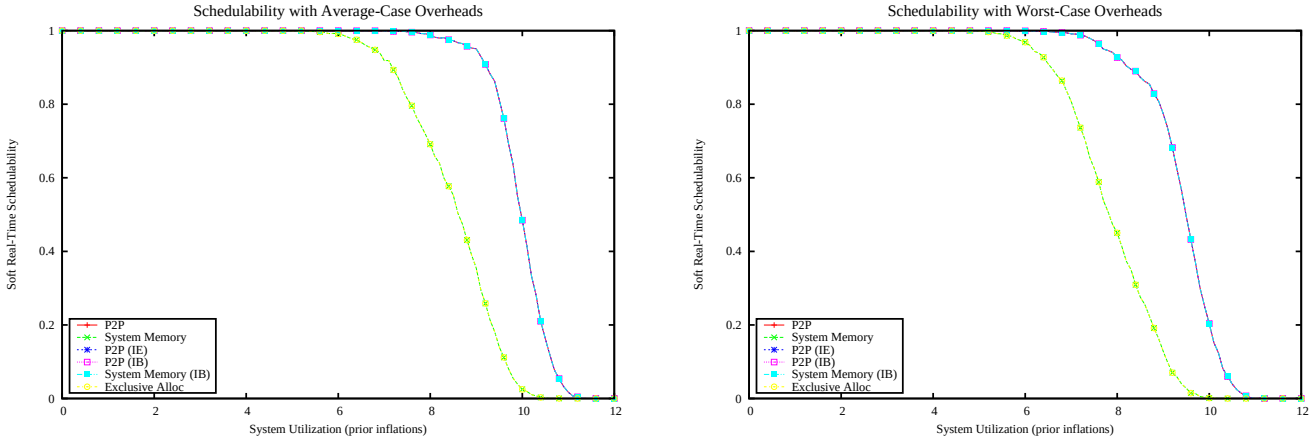

Figure 3880: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

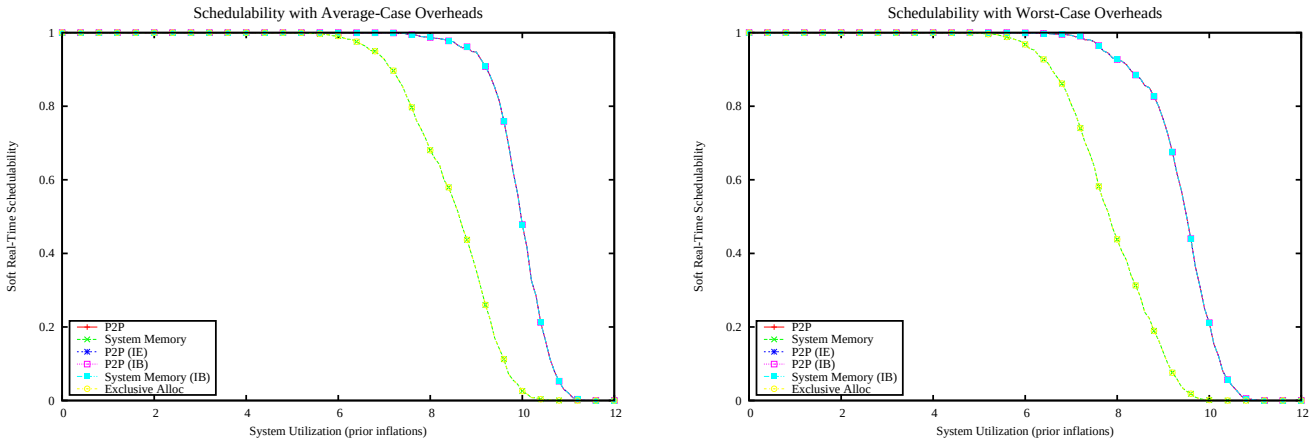

Figure 3881: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

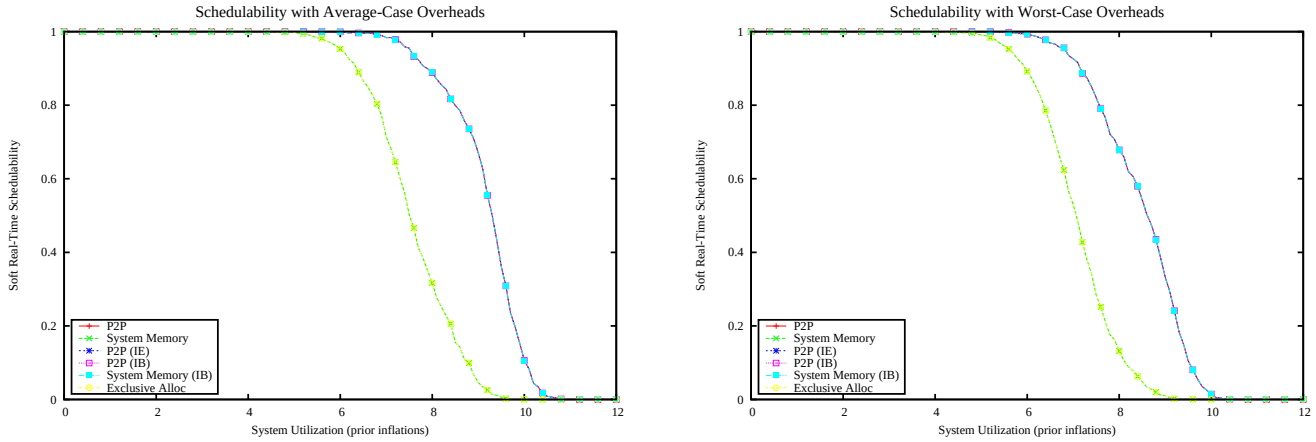

Figure 3882: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

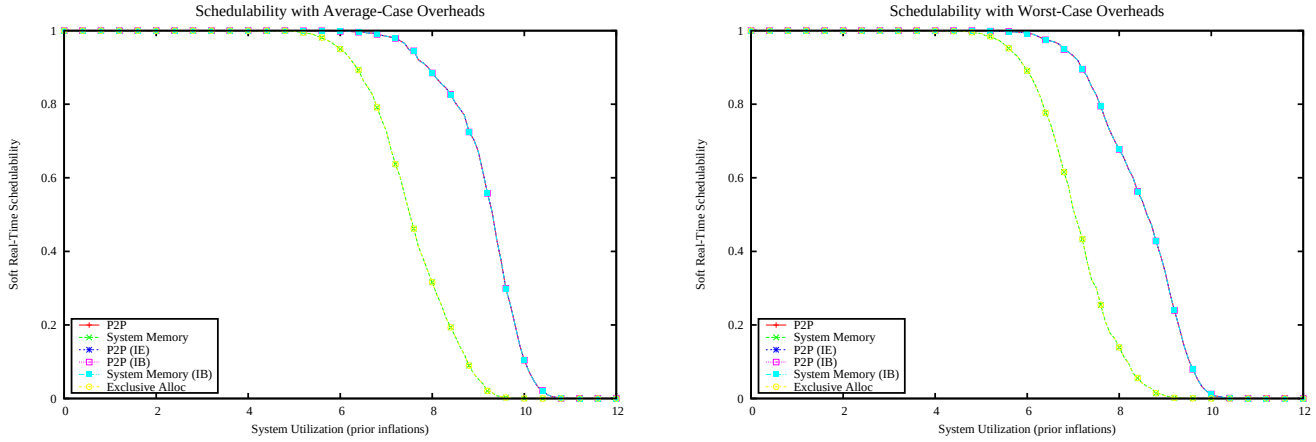

Figure 3883: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

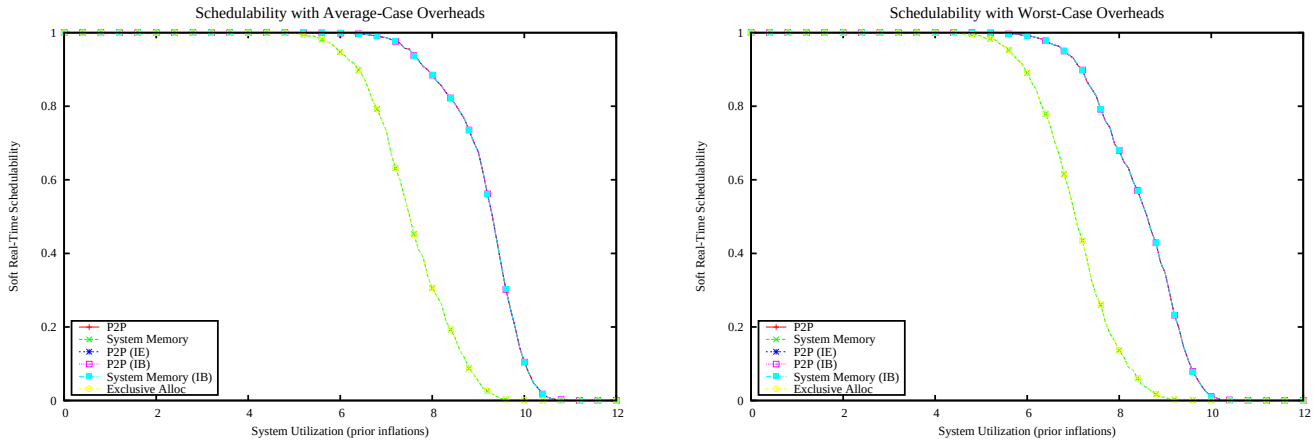

Figure 3884: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

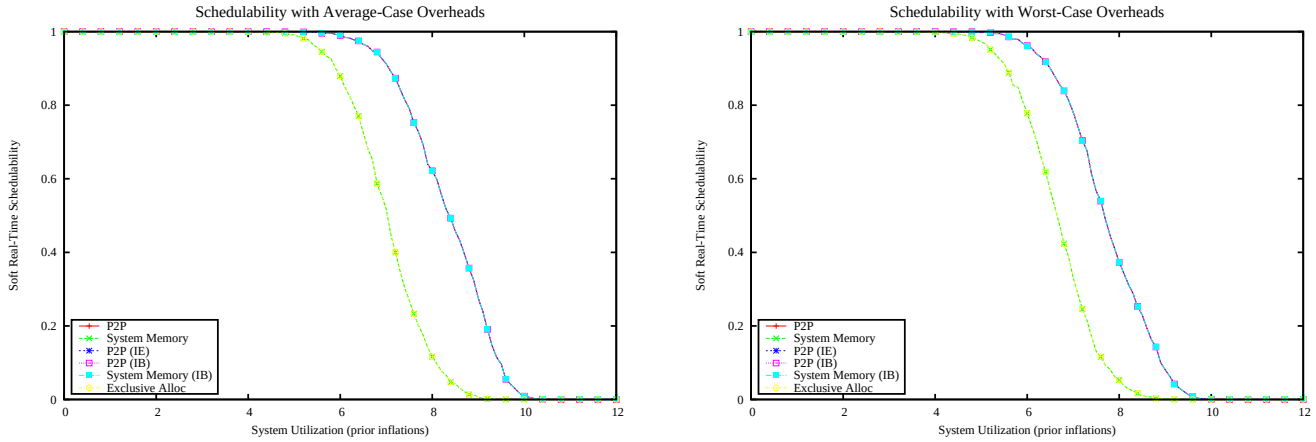

Figure 3885: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

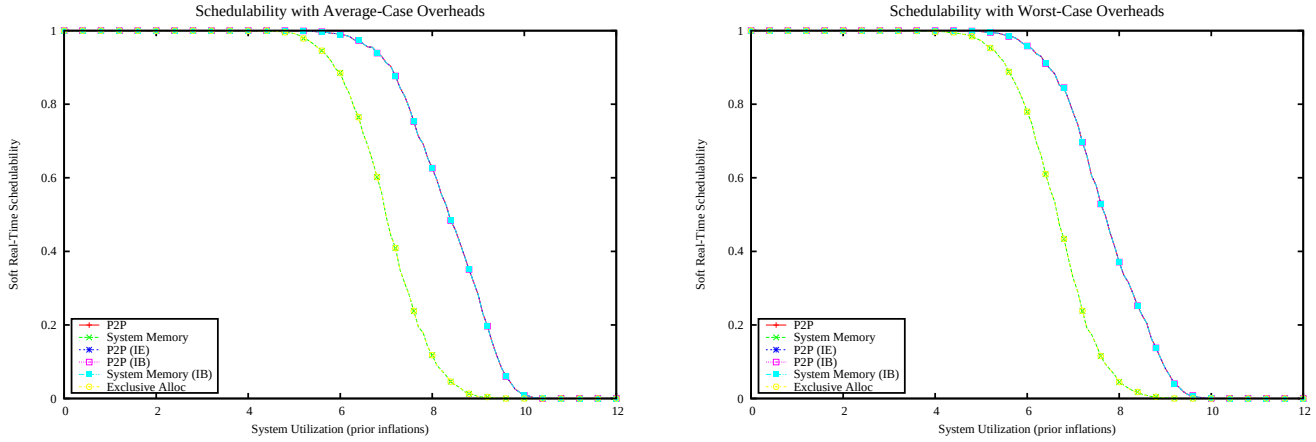

Figure 3886: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

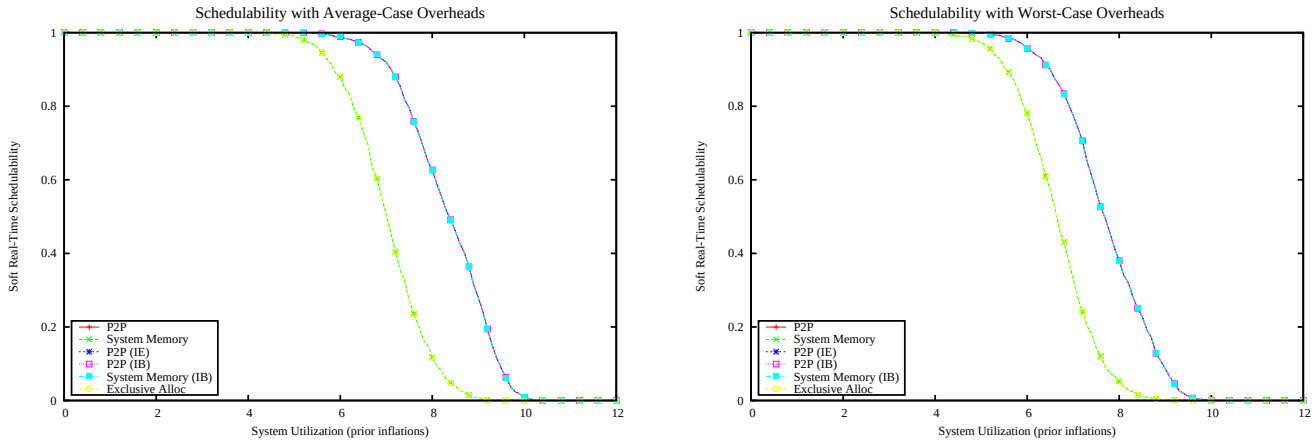

Figure 3887: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

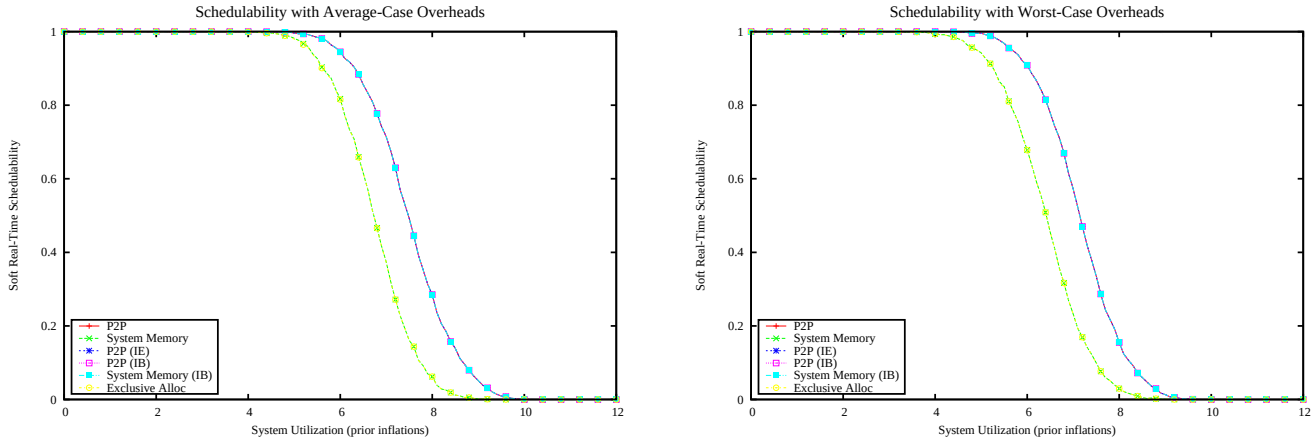

Figure 3888: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

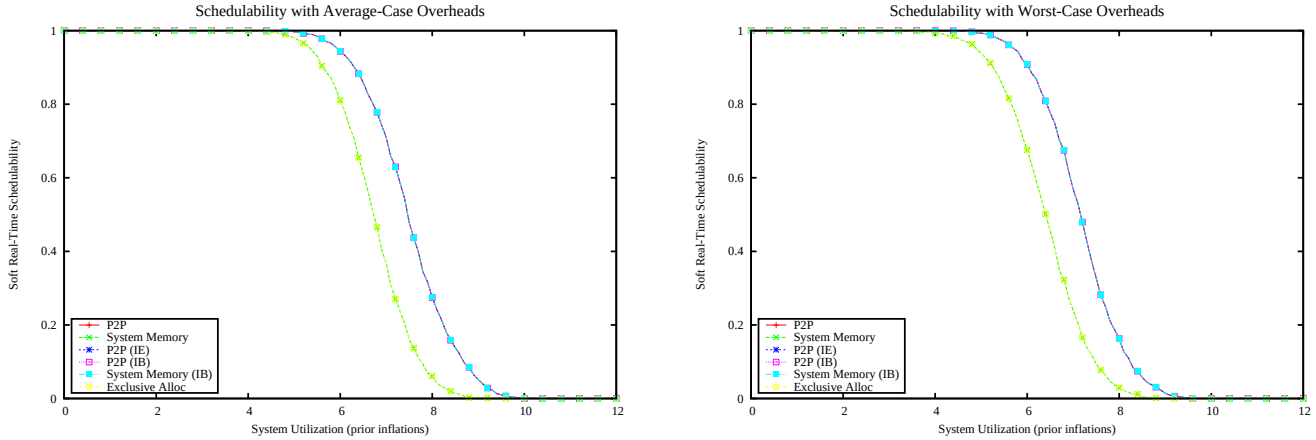

Figure 3889: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

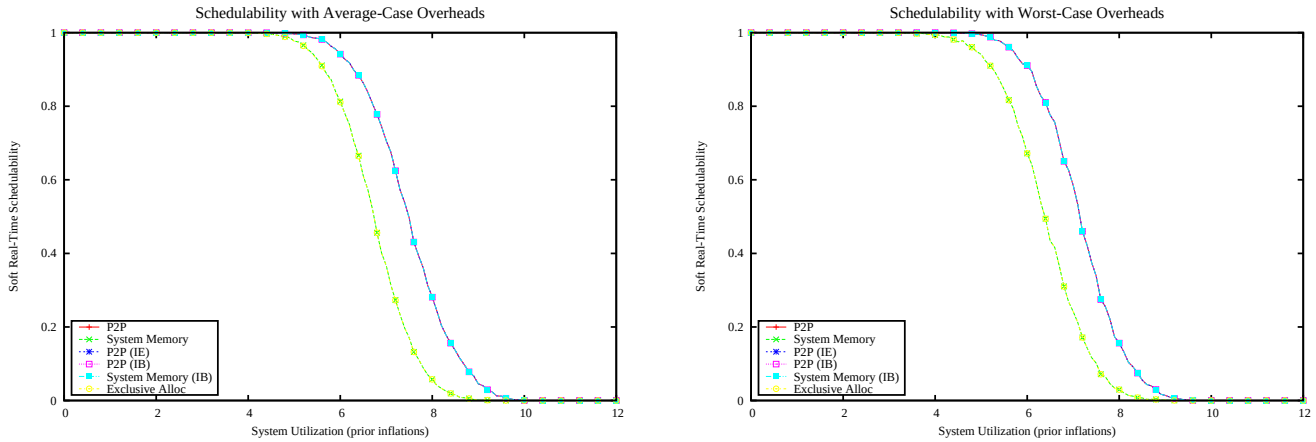

Figure 3890: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

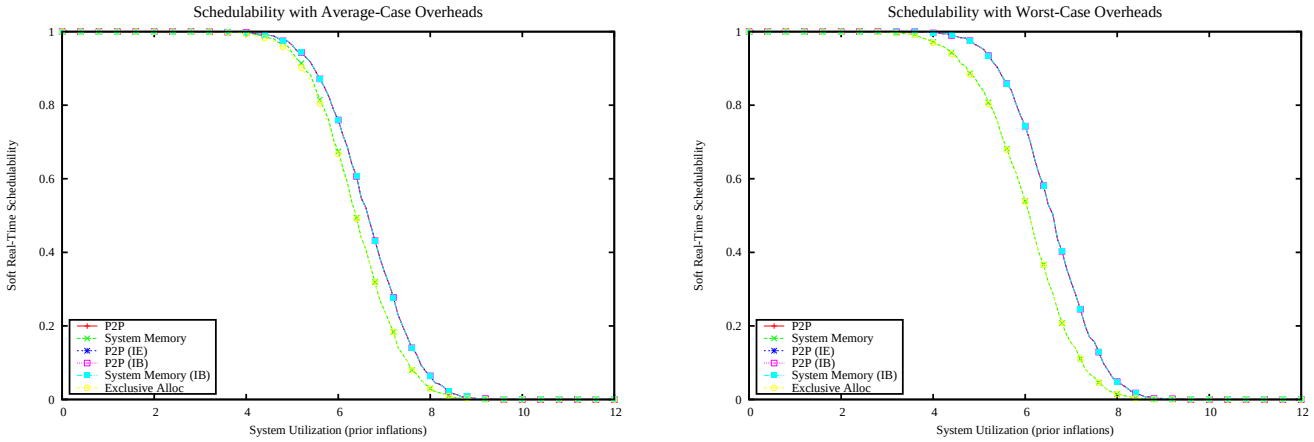

Figure 3891: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

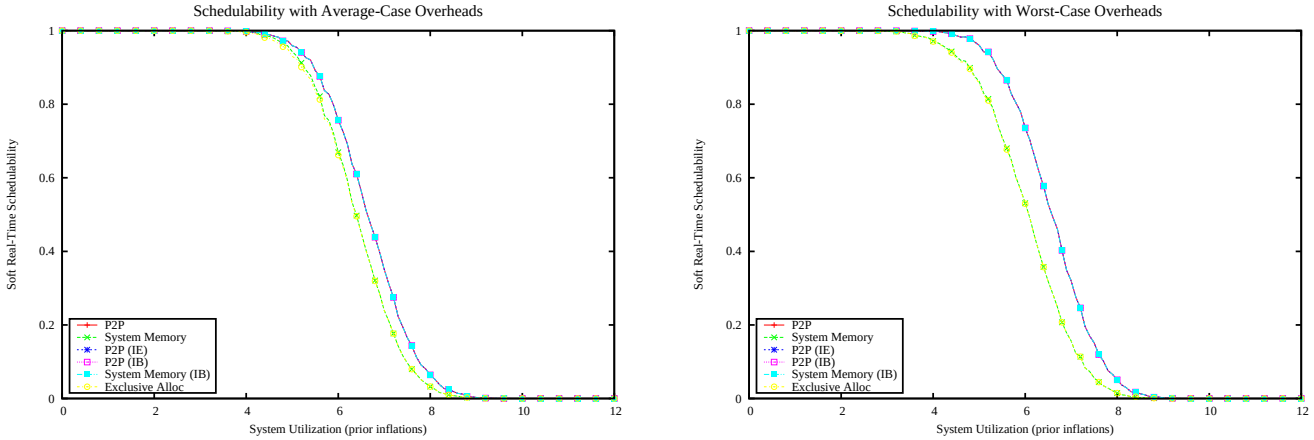

Figure 3892: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

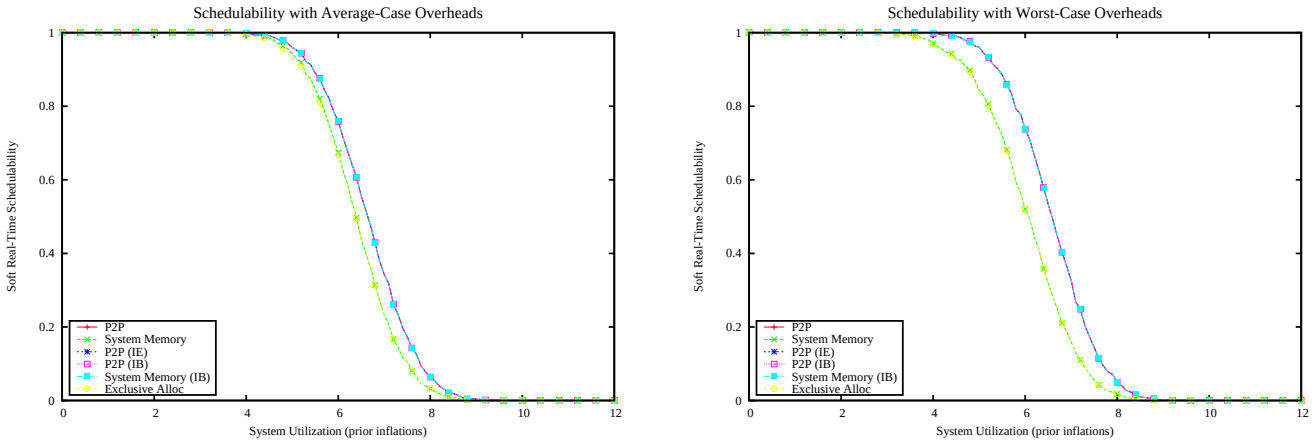

Figure 3893: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

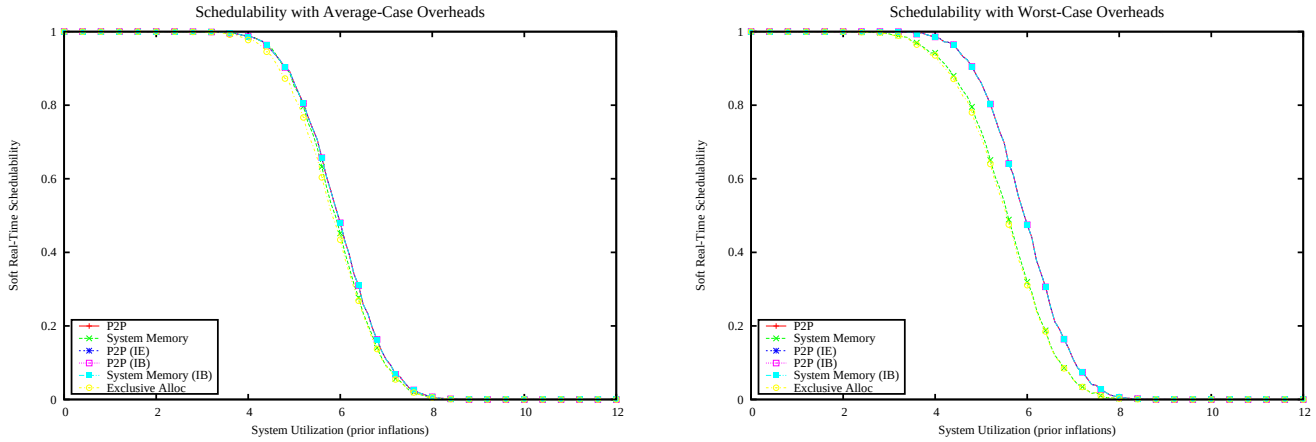

Figure 3894: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

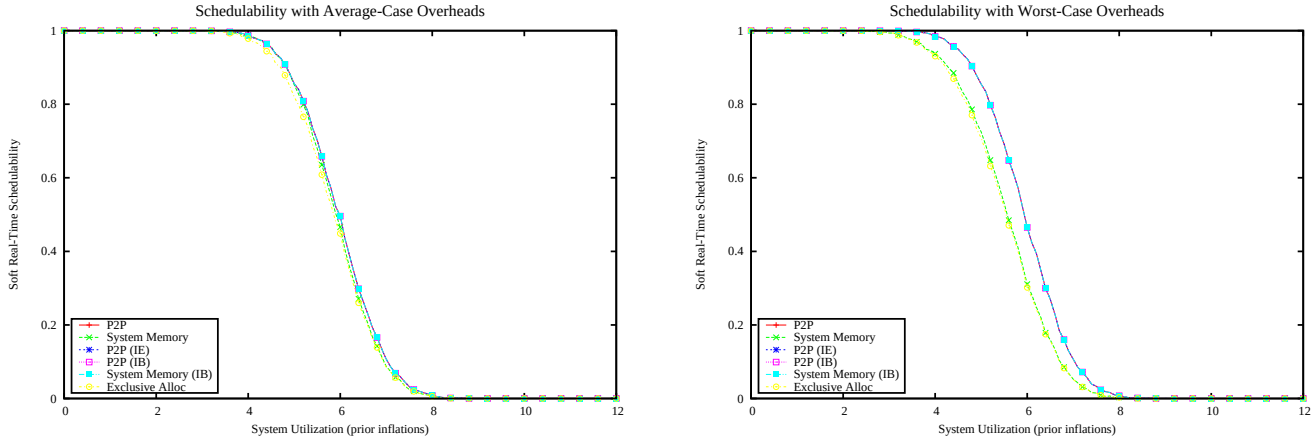

Figure 3895: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

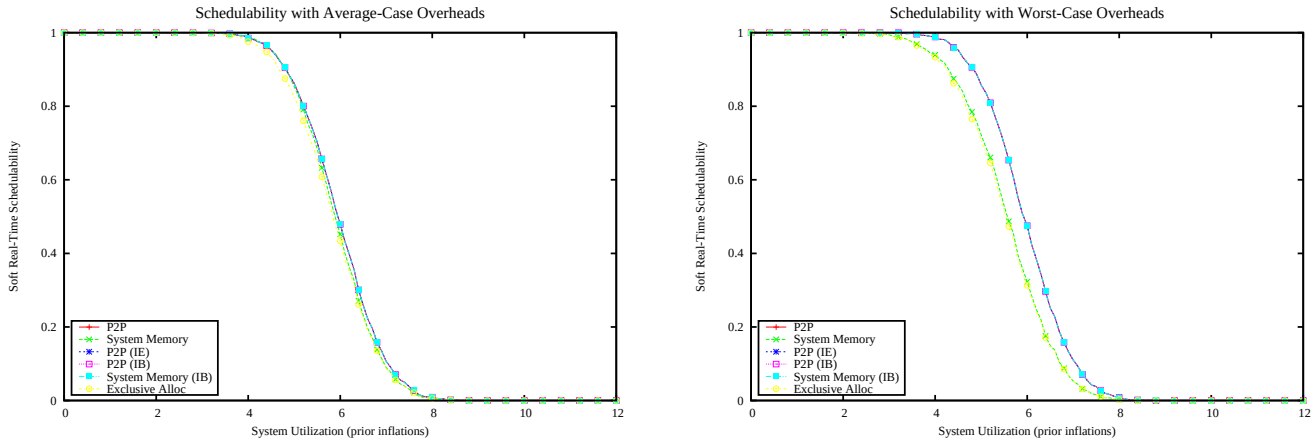

Figure 3896: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

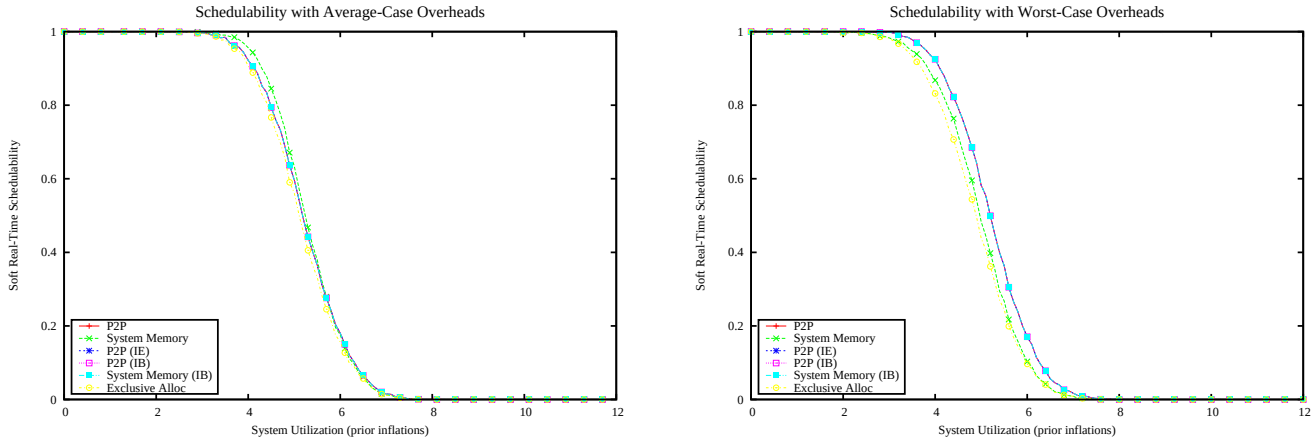

Figure 3897: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

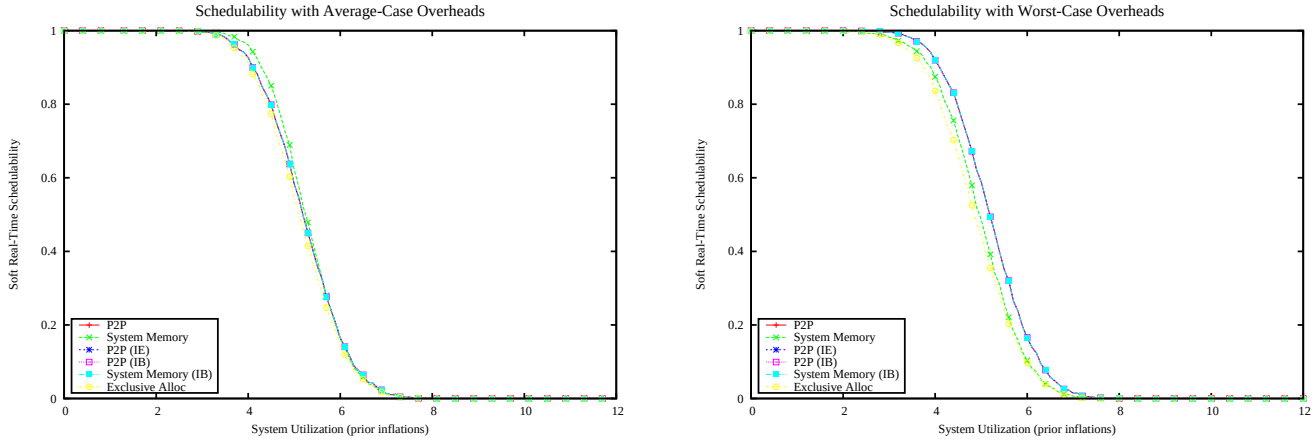

Figure 3898: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

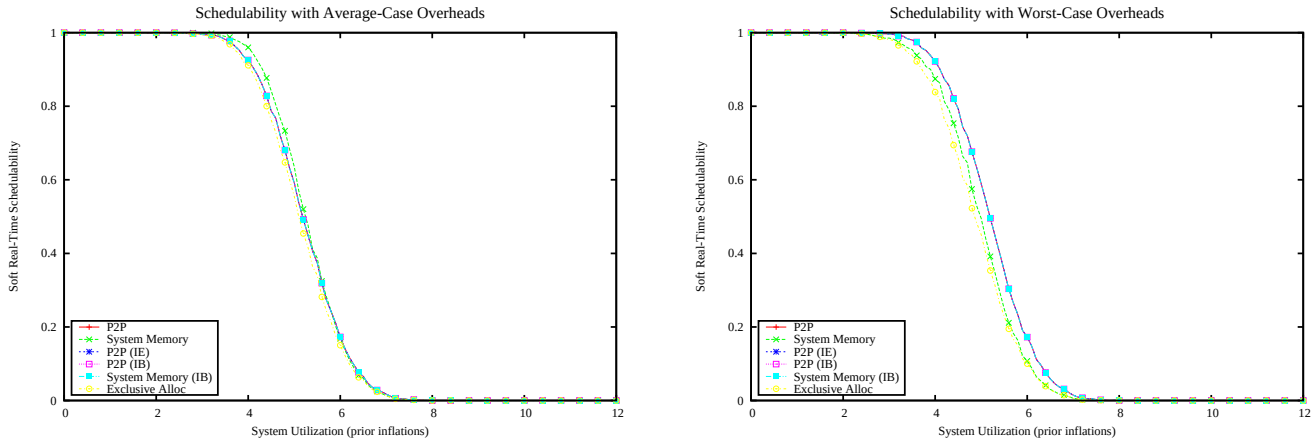

Figure 3899: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

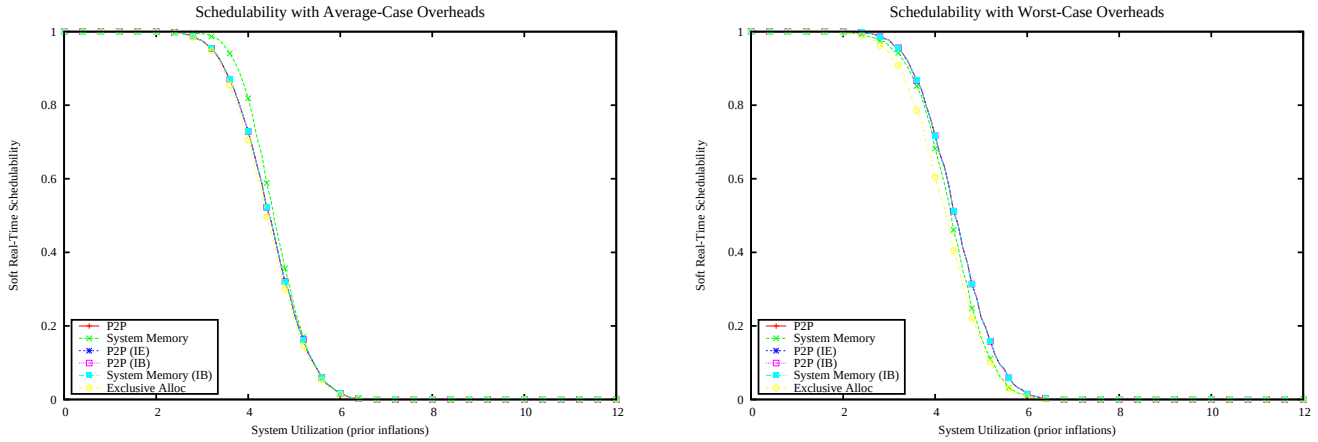

Figure 3900: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

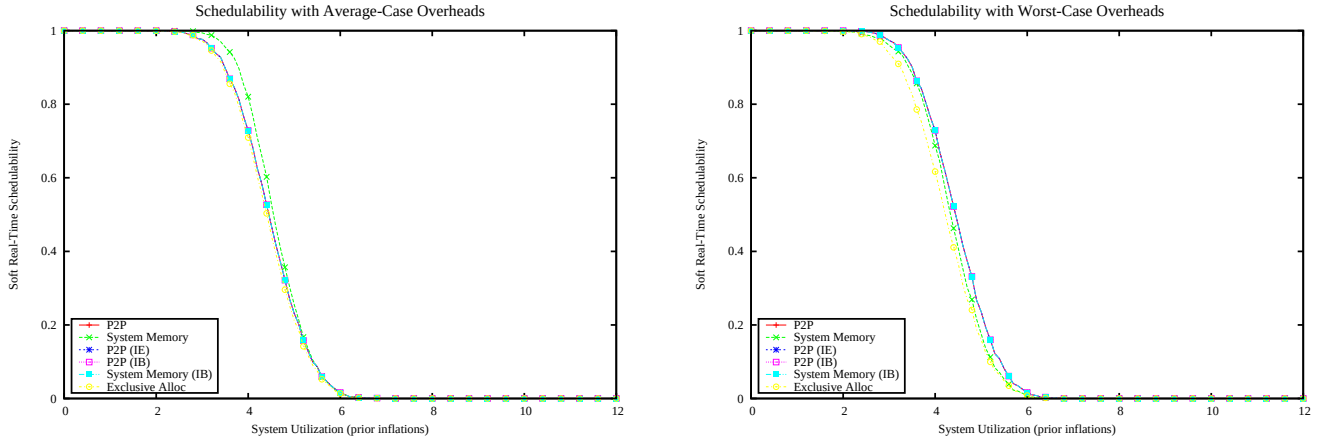

Figure 3901: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

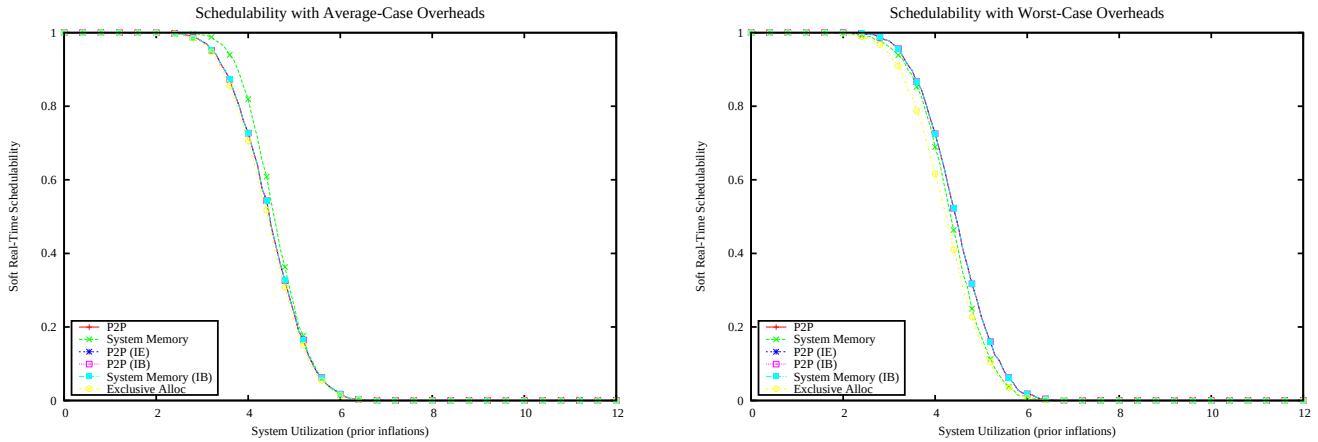

Figure 3902: 2x6 CPU Clusters, 4x2 GPU Clusters (Near P2P), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

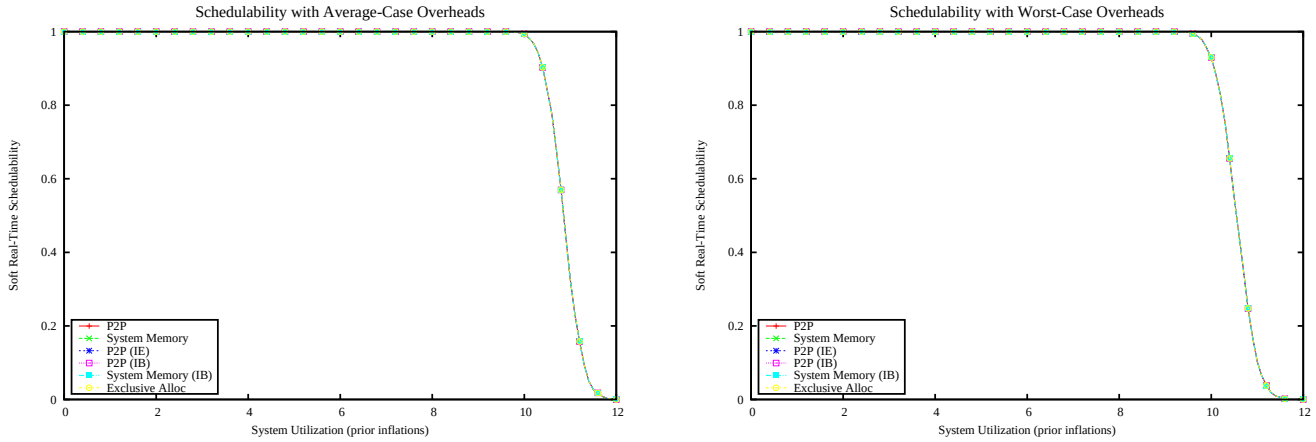

Figure 3903: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

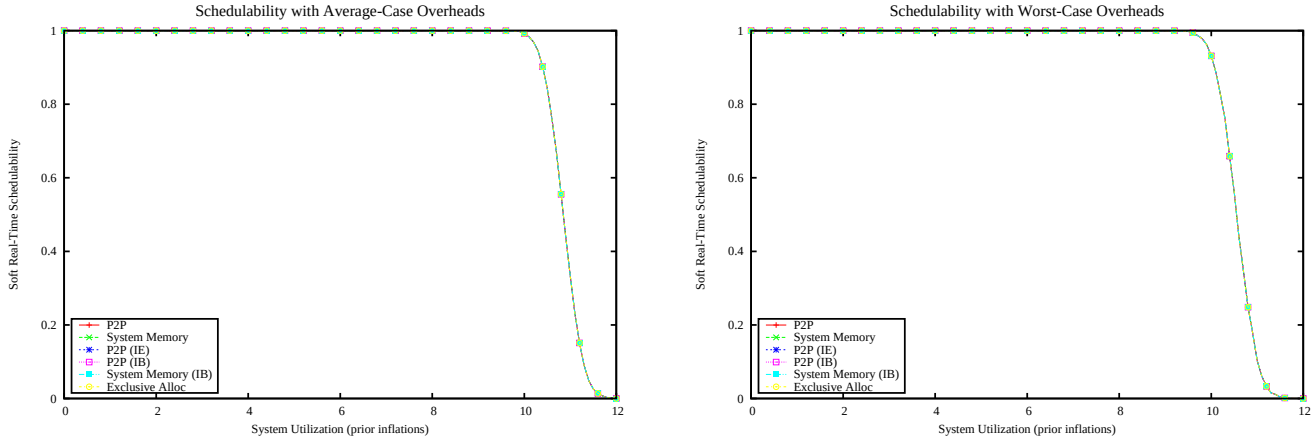

Figure 3904: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

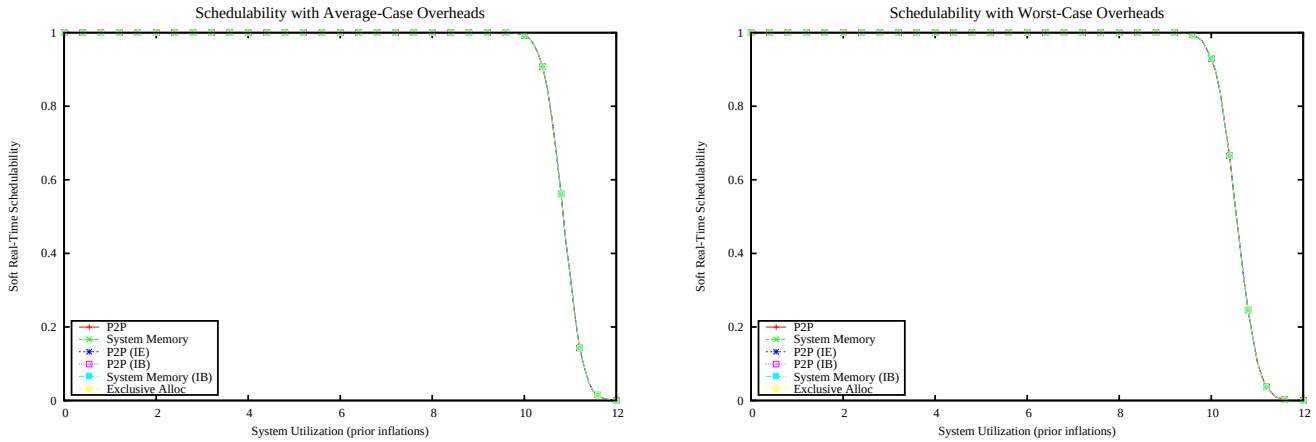

Figure 3905: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

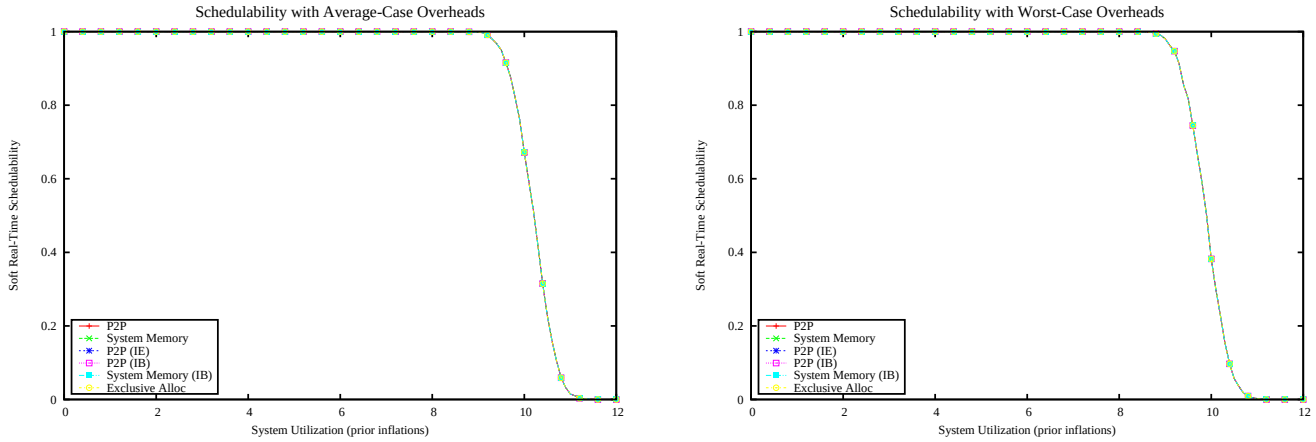

Figure 3906: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

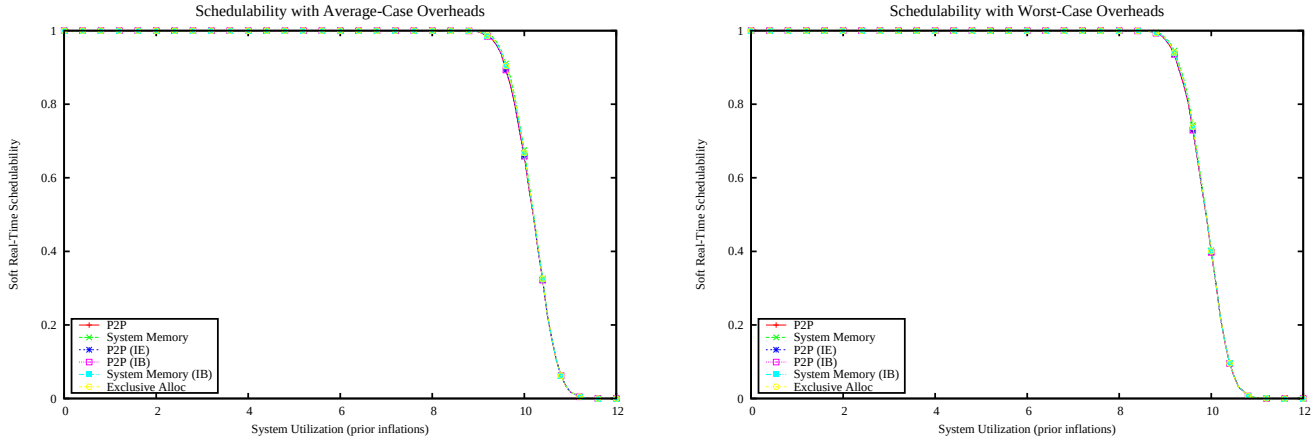

Figure 3907: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

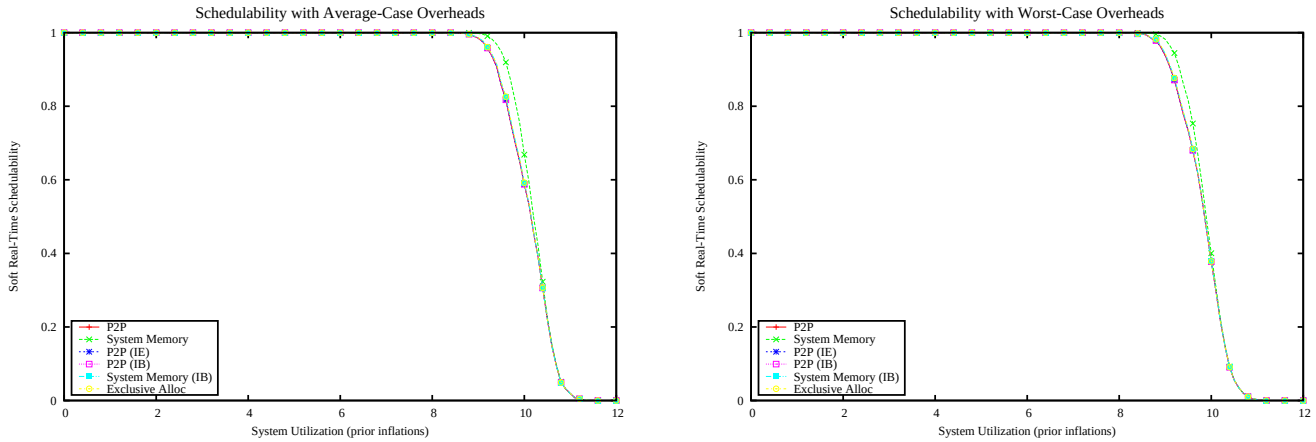

Figure 3908: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

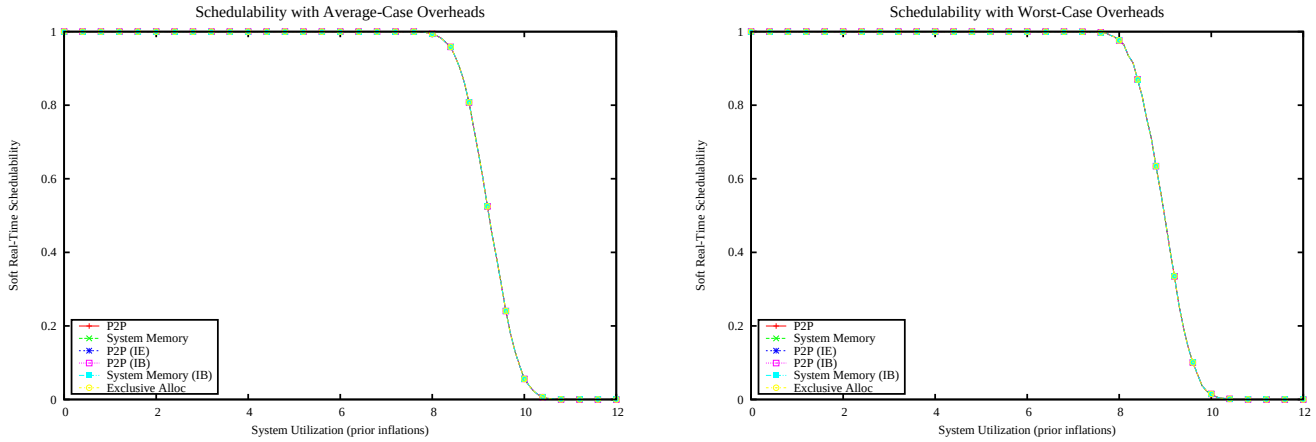

Figure 3909: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

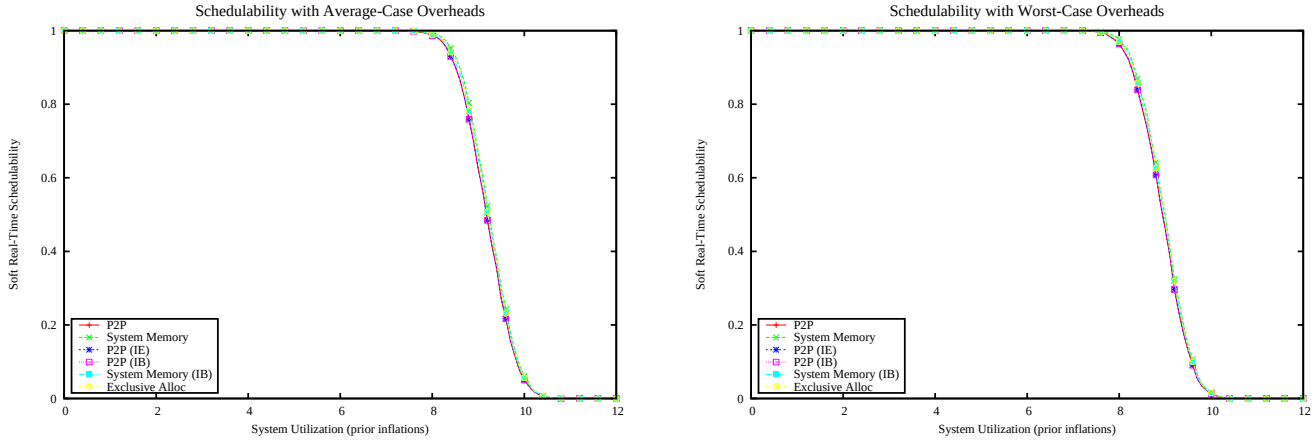

Figure 3910: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

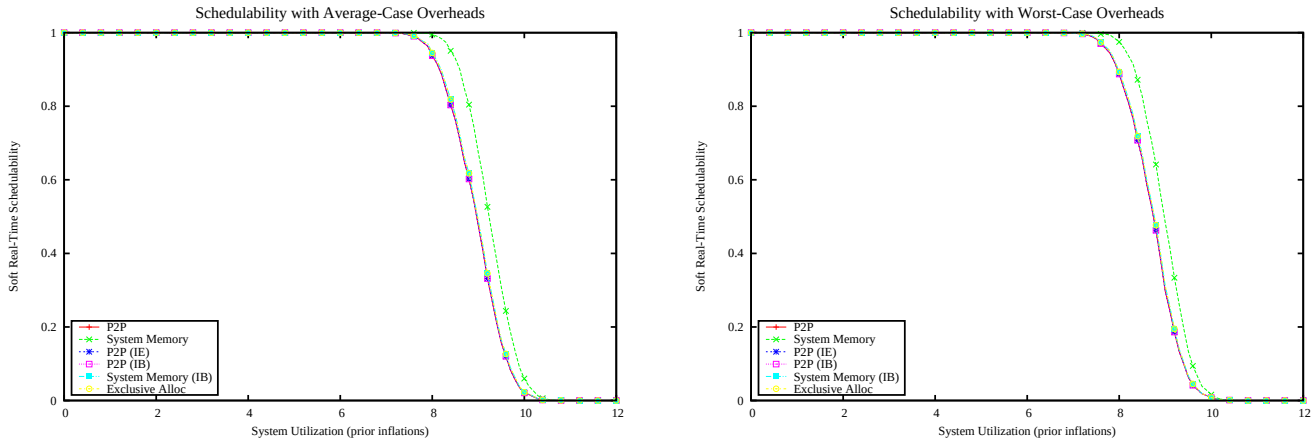

Figure 3911: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

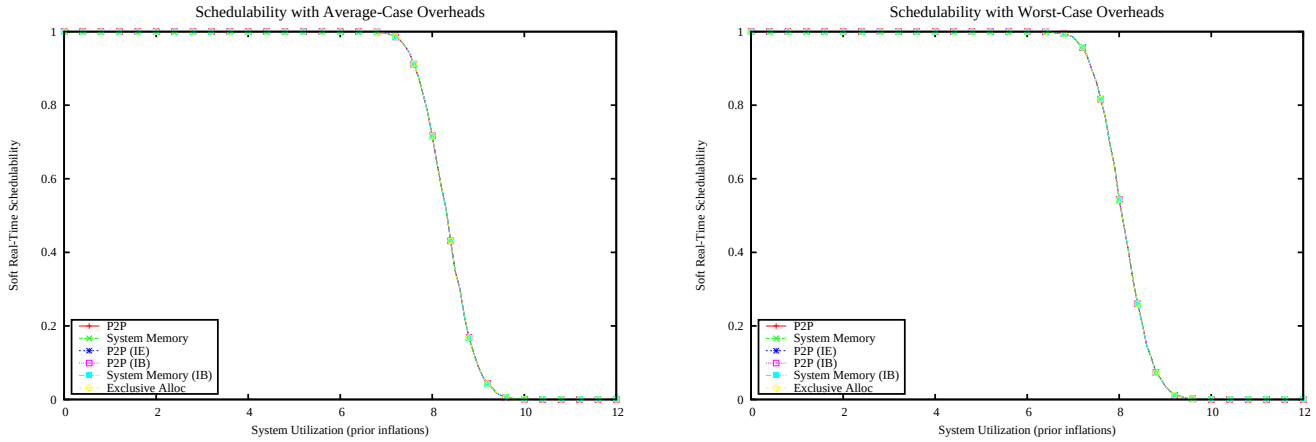

Figure 3912: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

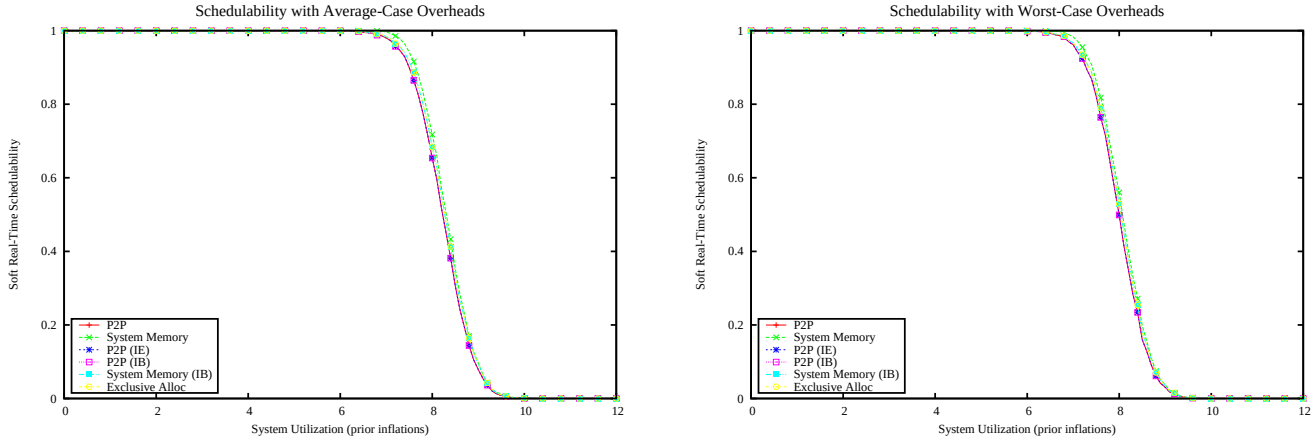

Figure 3913: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

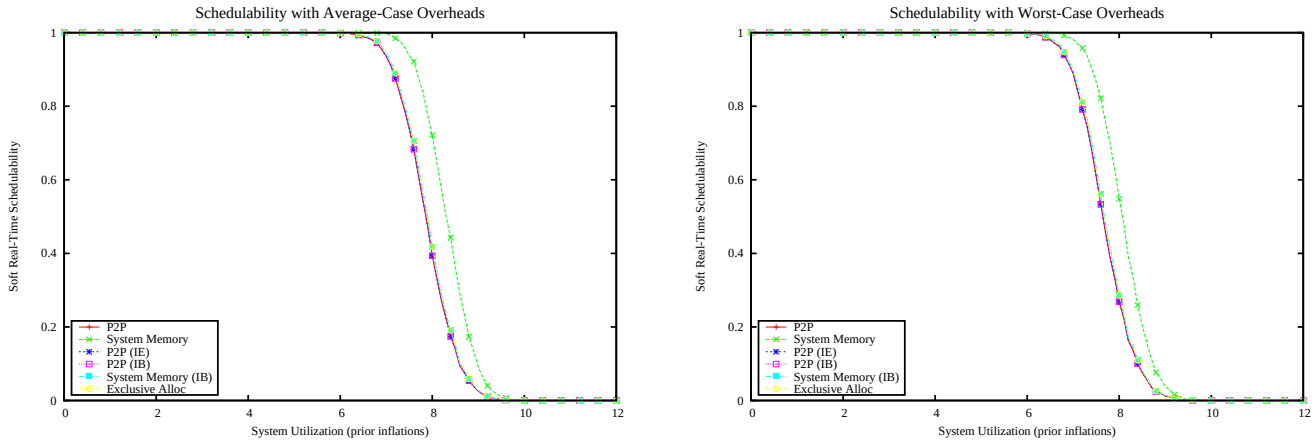

Figure 3914: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

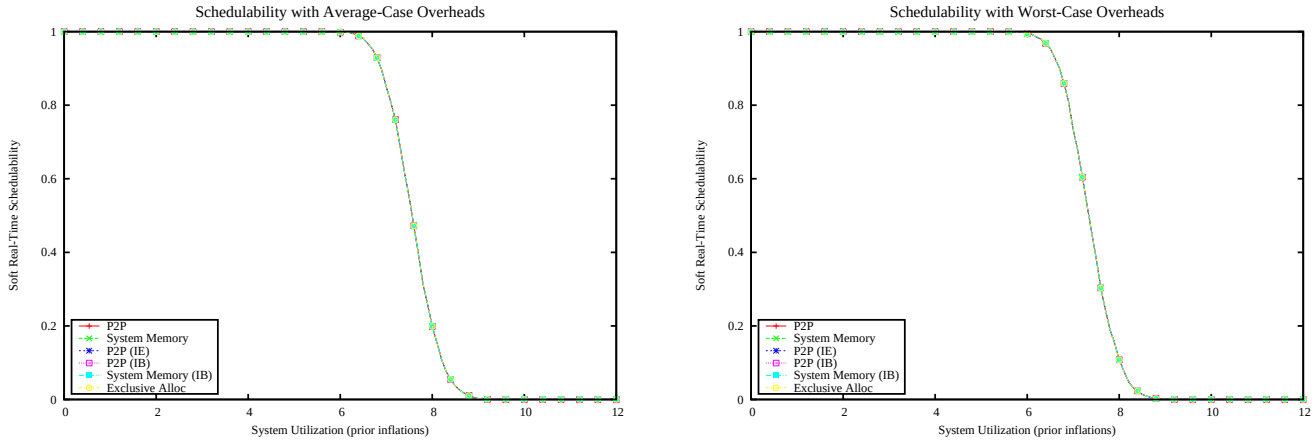

Figure 3915: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

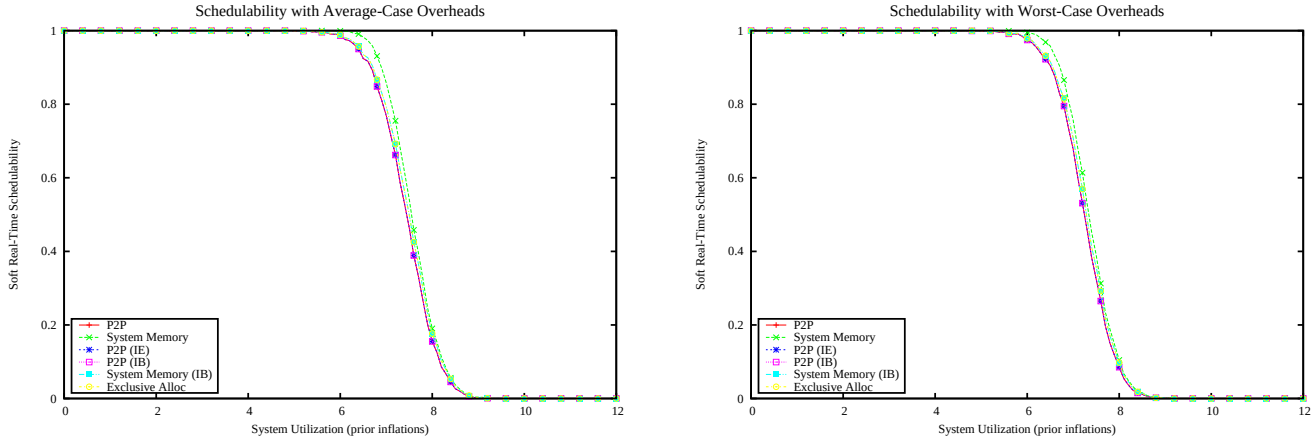

Figure 3916: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

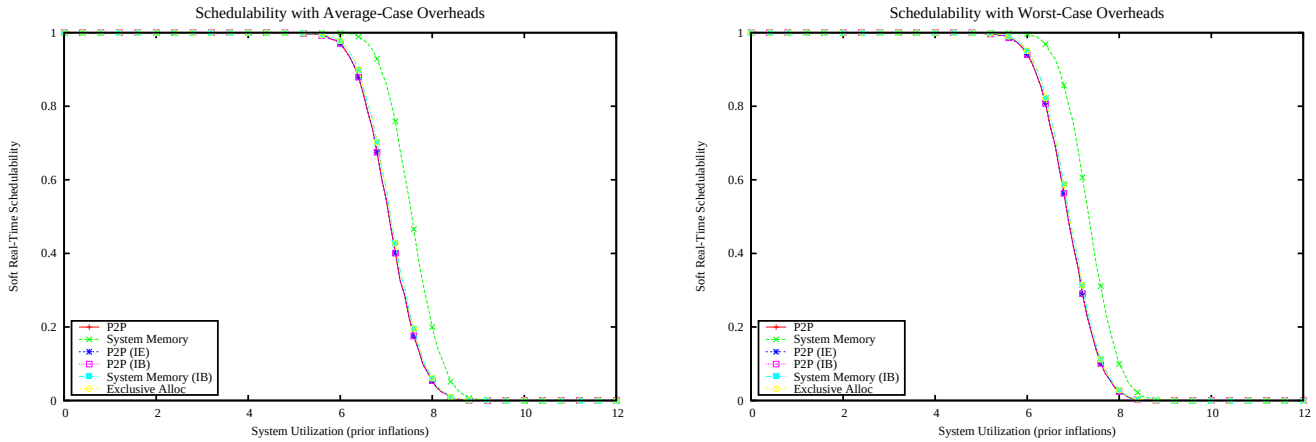

Figure 3917: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

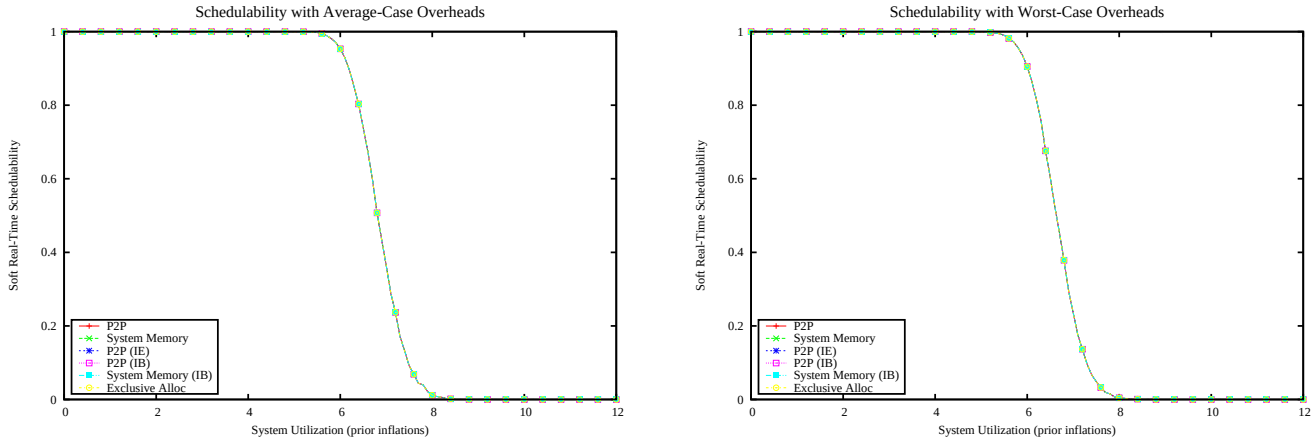

Figure 3918: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

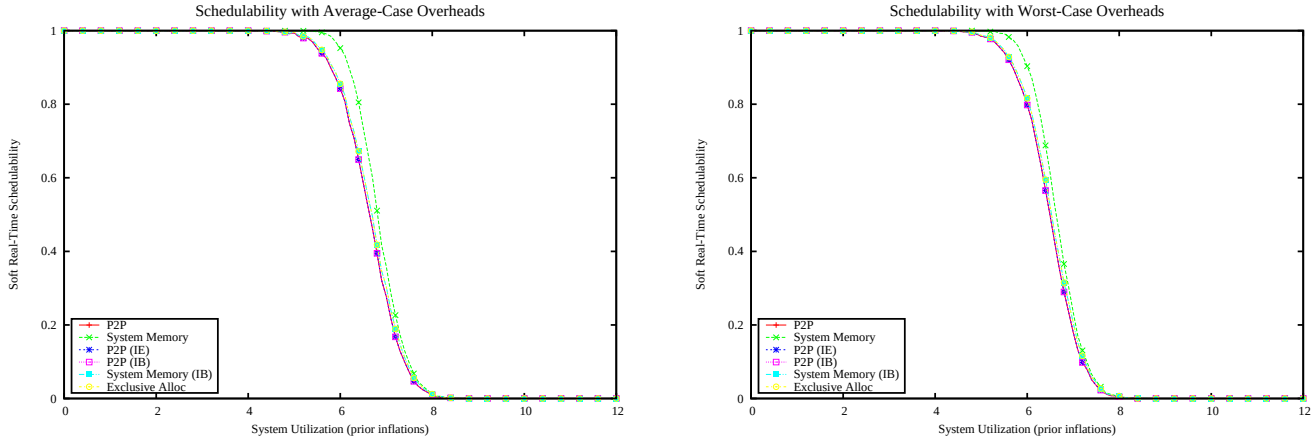

Figure 3919: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

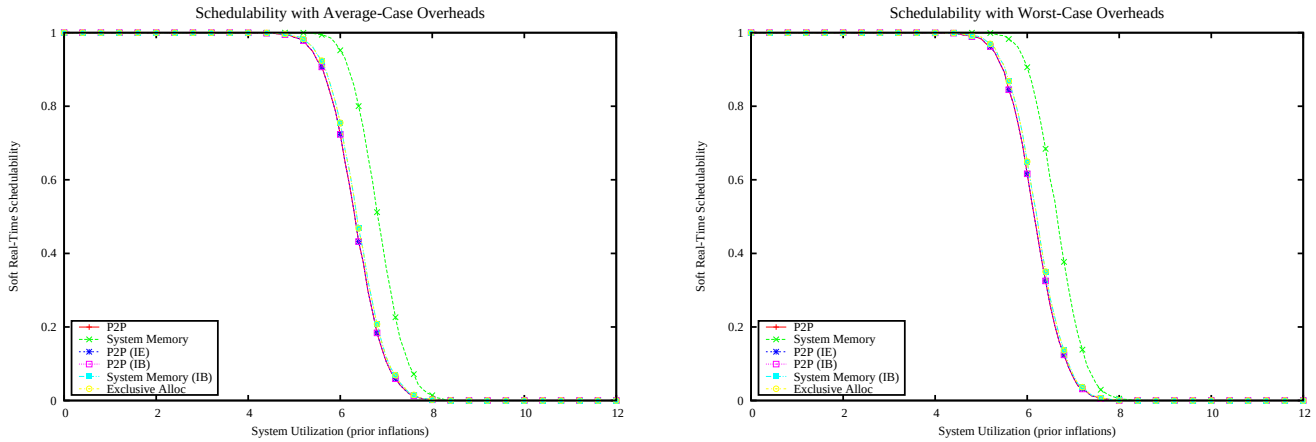

Figure 3920: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

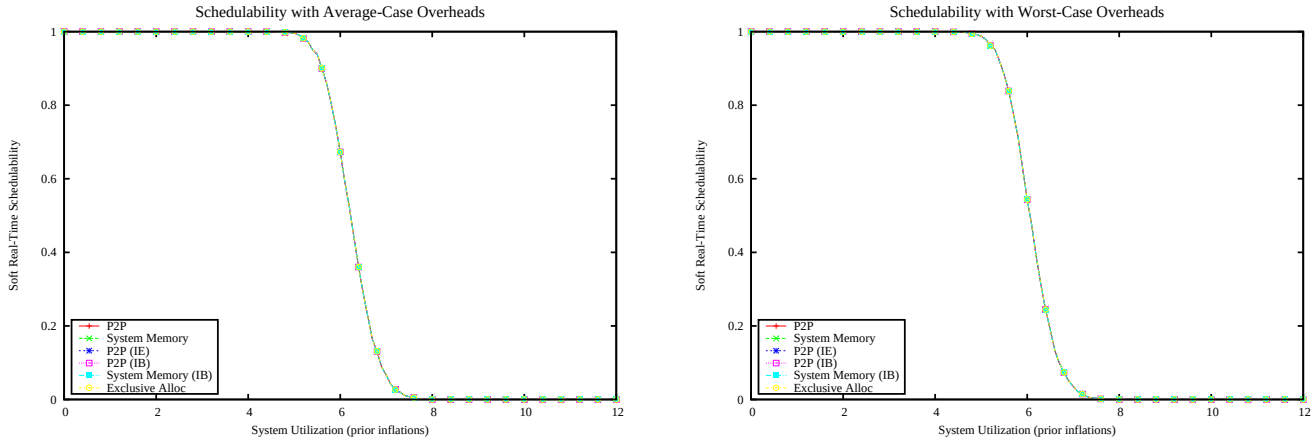

Figure 3921: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

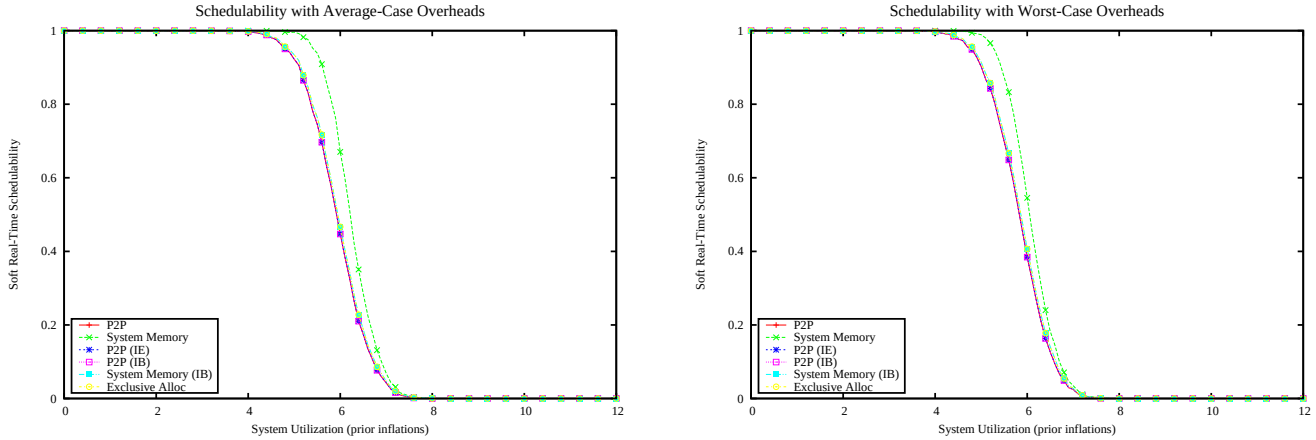

Figure 3922: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

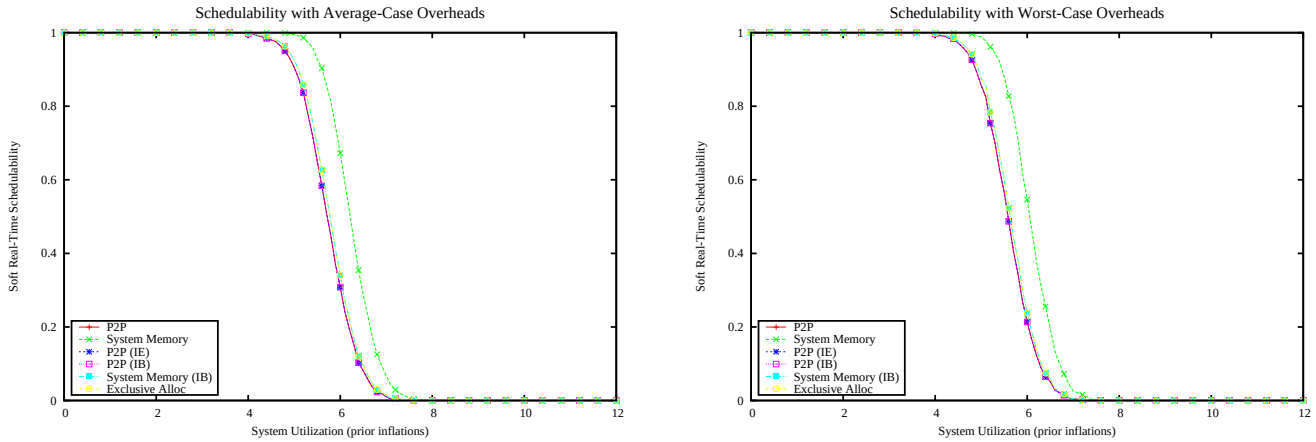

Figure 3923: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

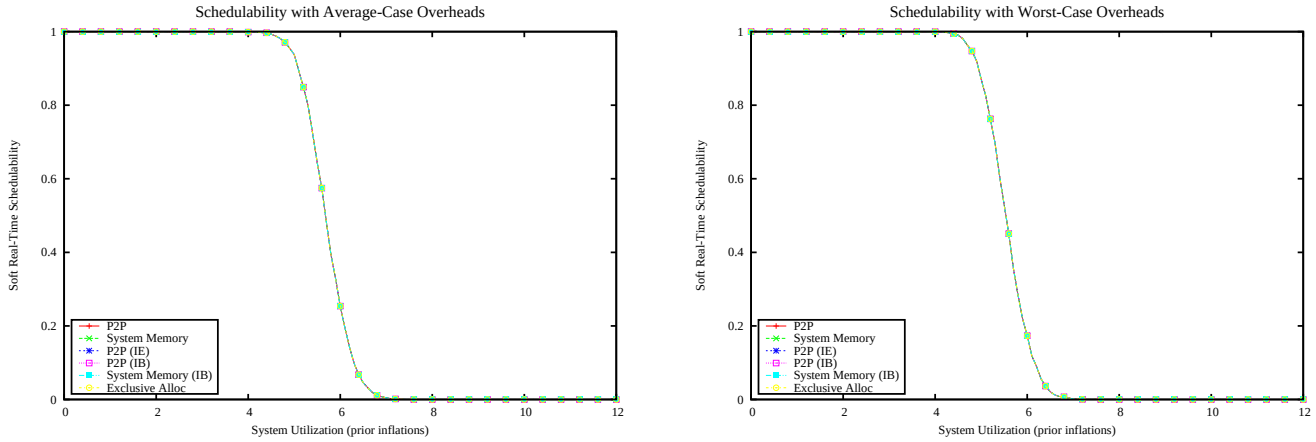

Figure 3924: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

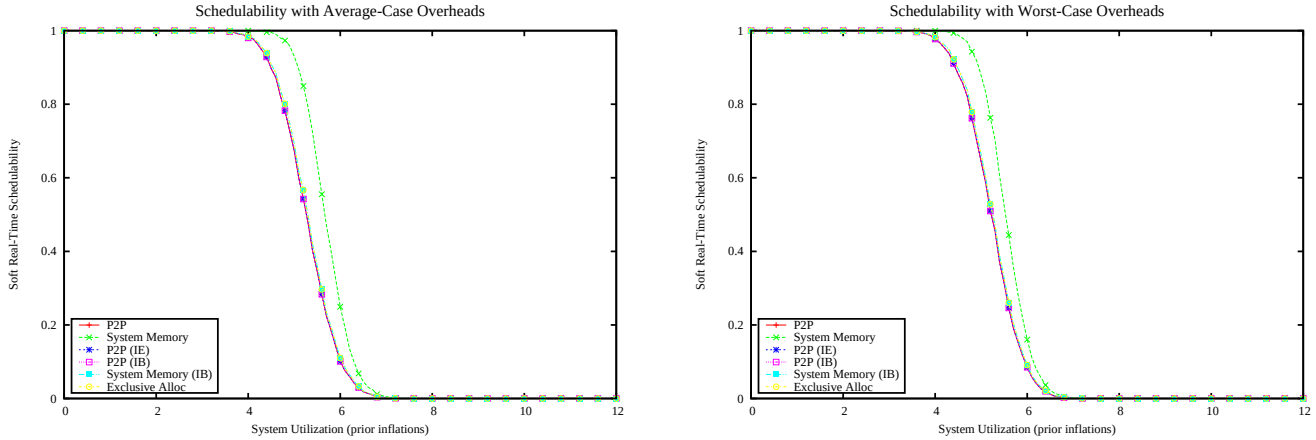

Figure 3925: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

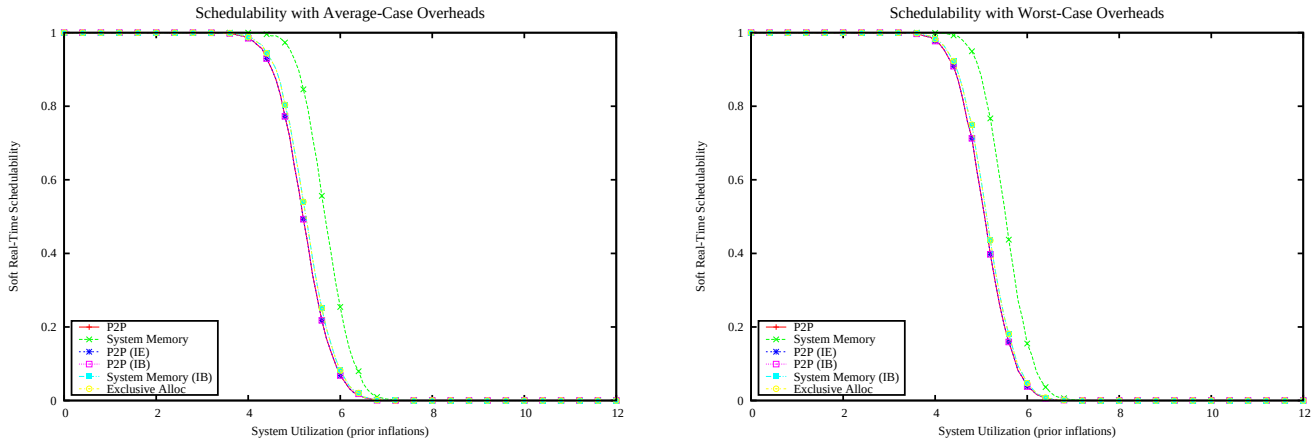

Figure 3926: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

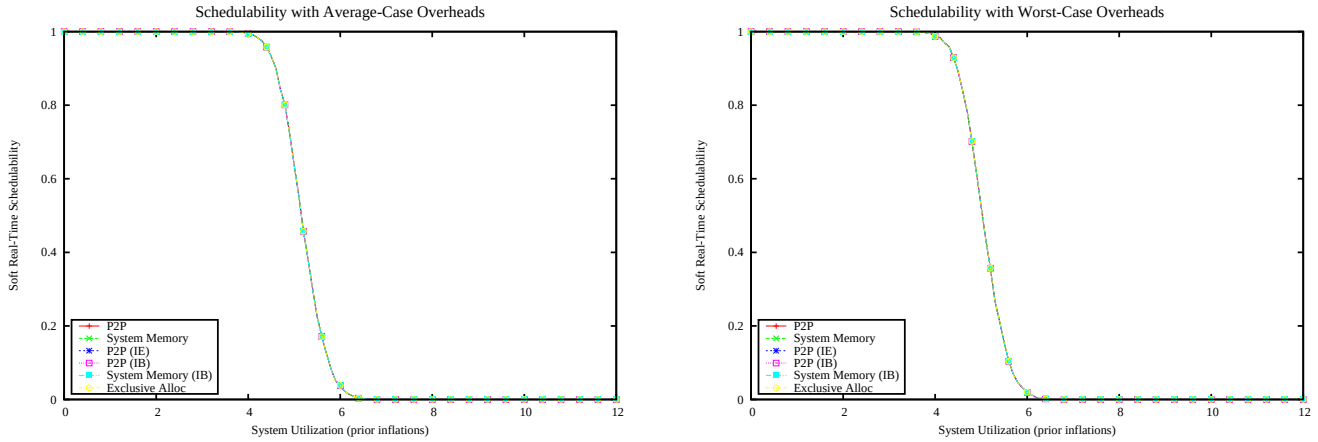

Figure 3927: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

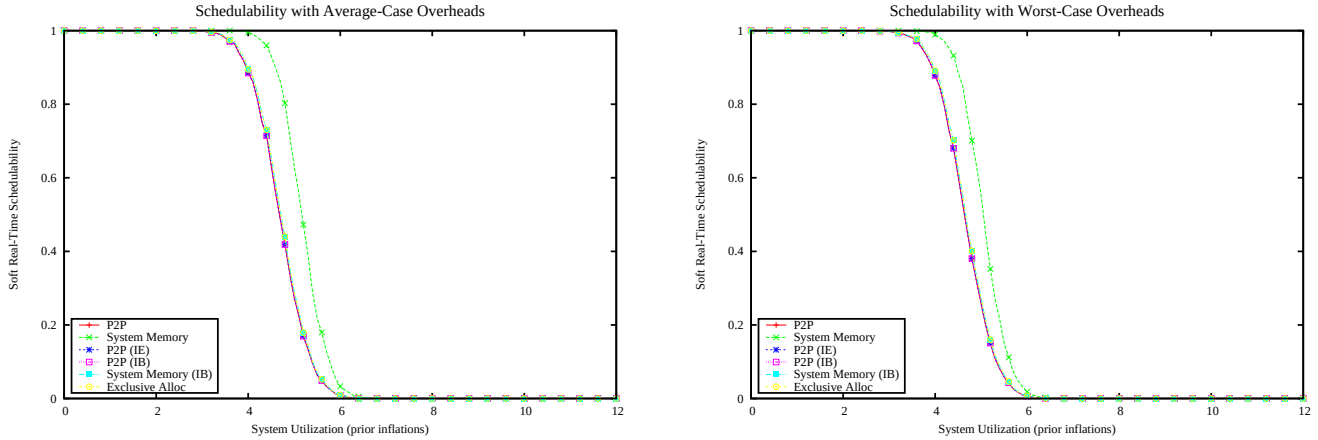

Figure 3928: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

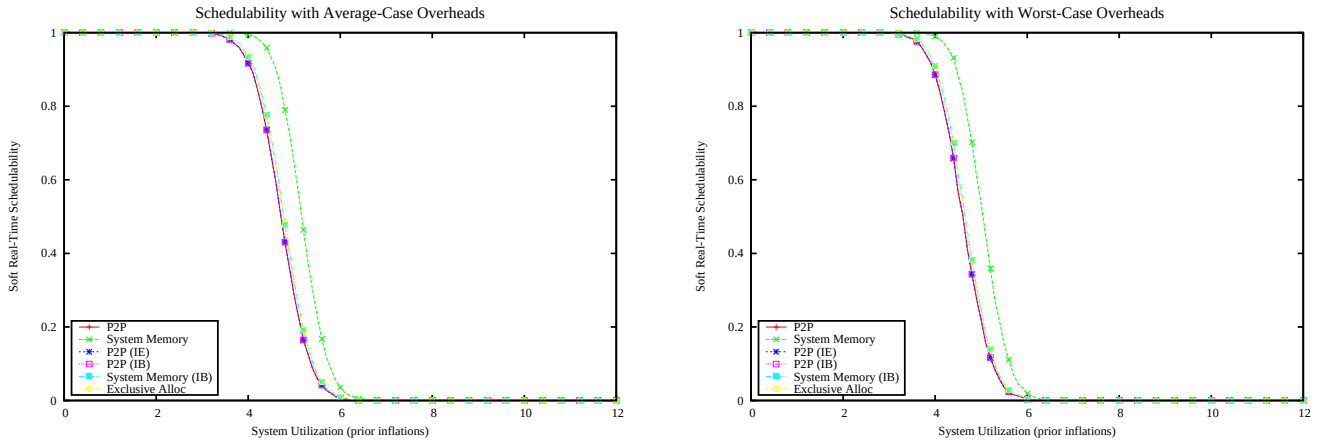

Figure 3929: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

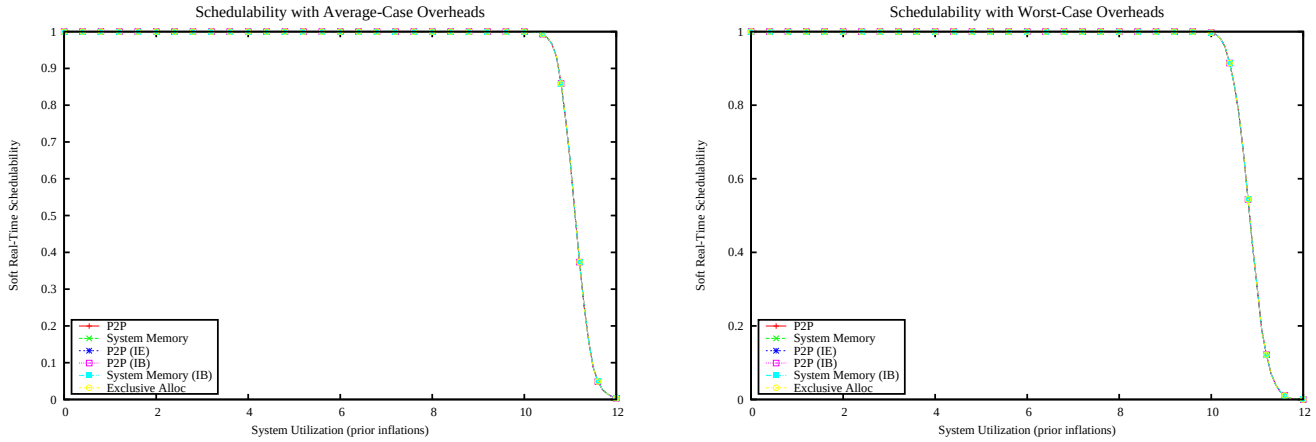

Figure 3930: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

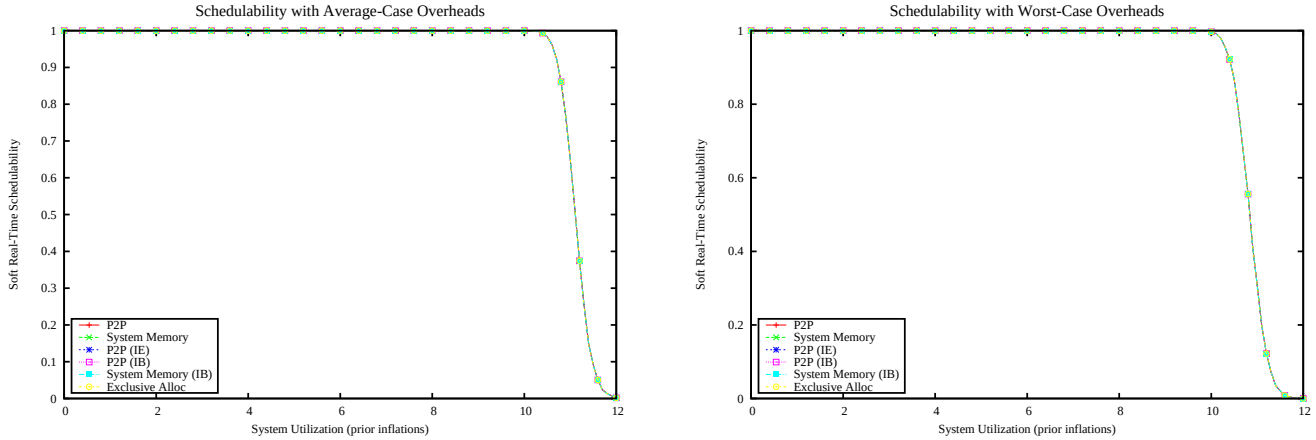

Figure 3931: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

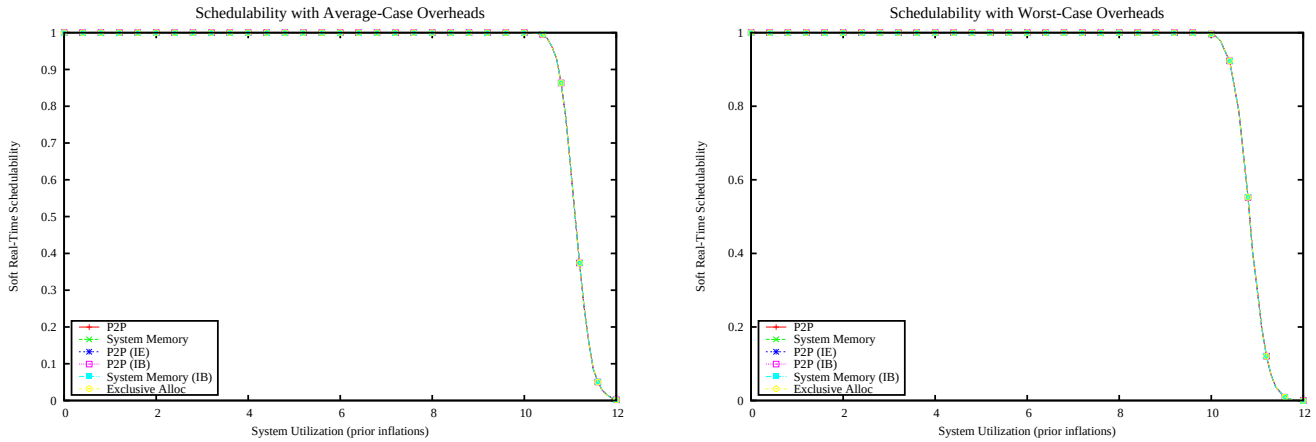

Figure 3932: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

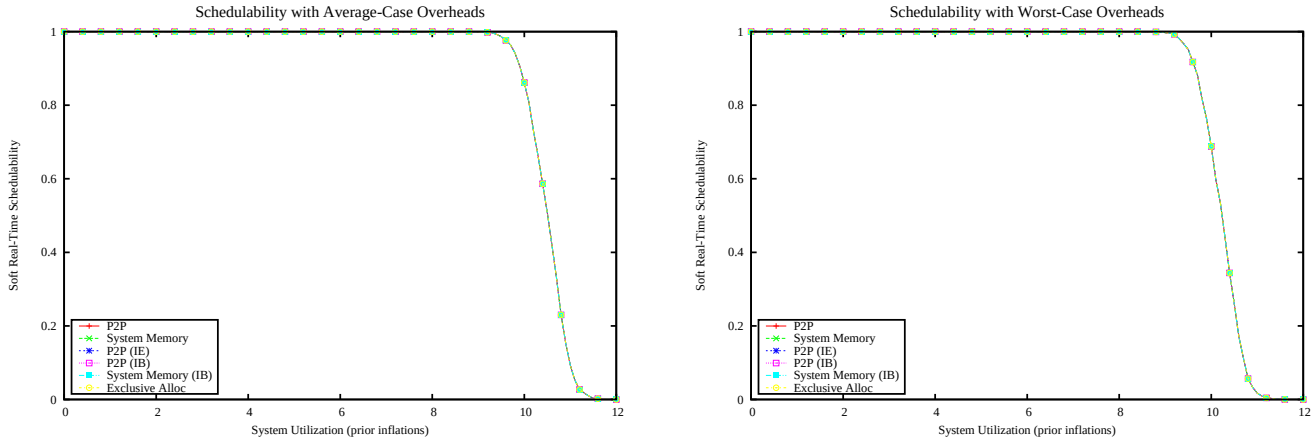

Figure 3933: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

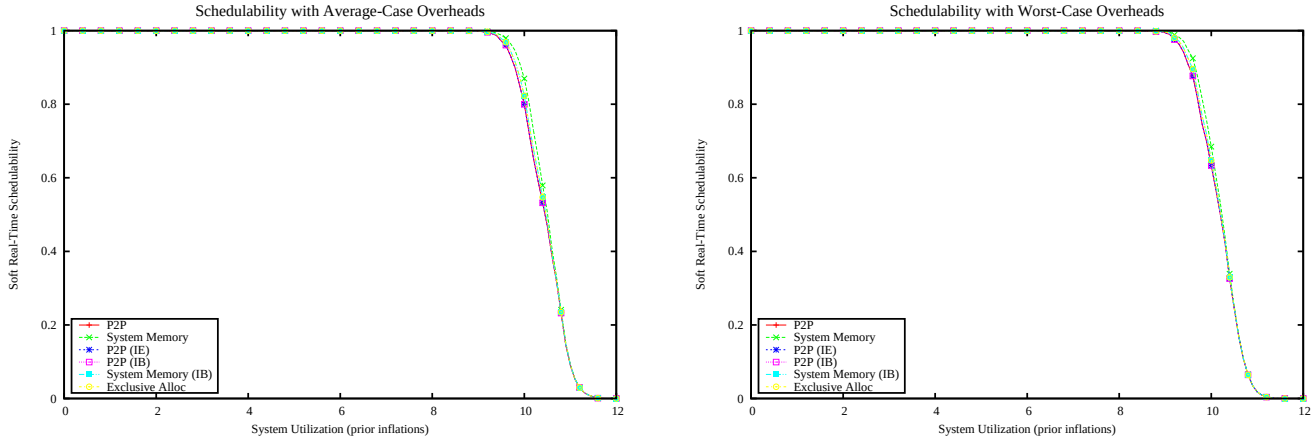

Figure 3934: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

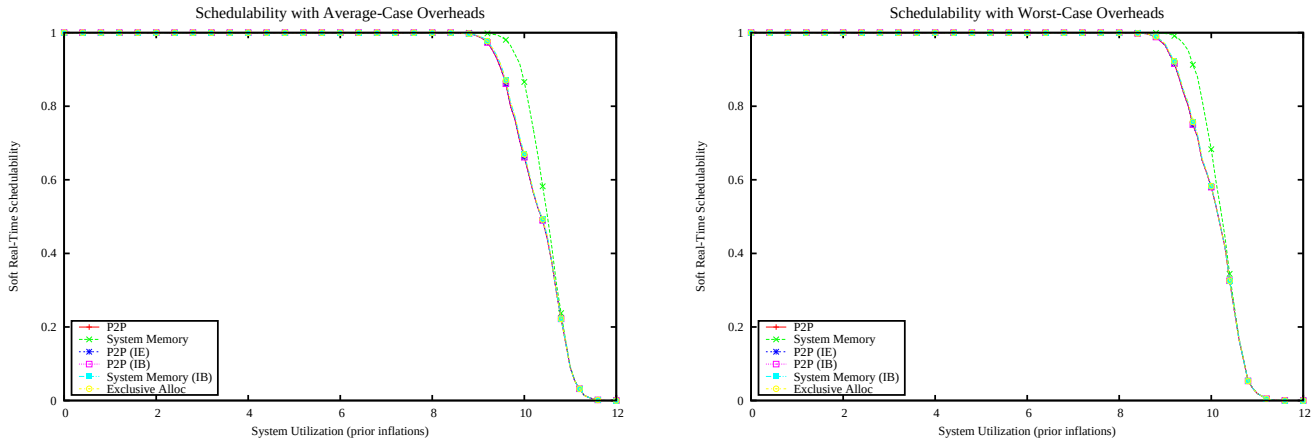

Figure 3935: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

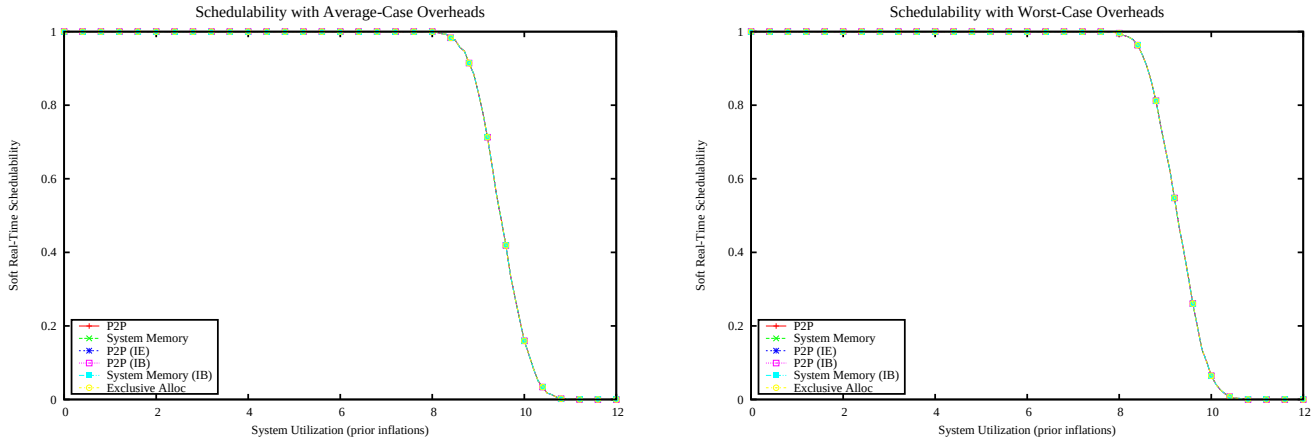

Figure 3936: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

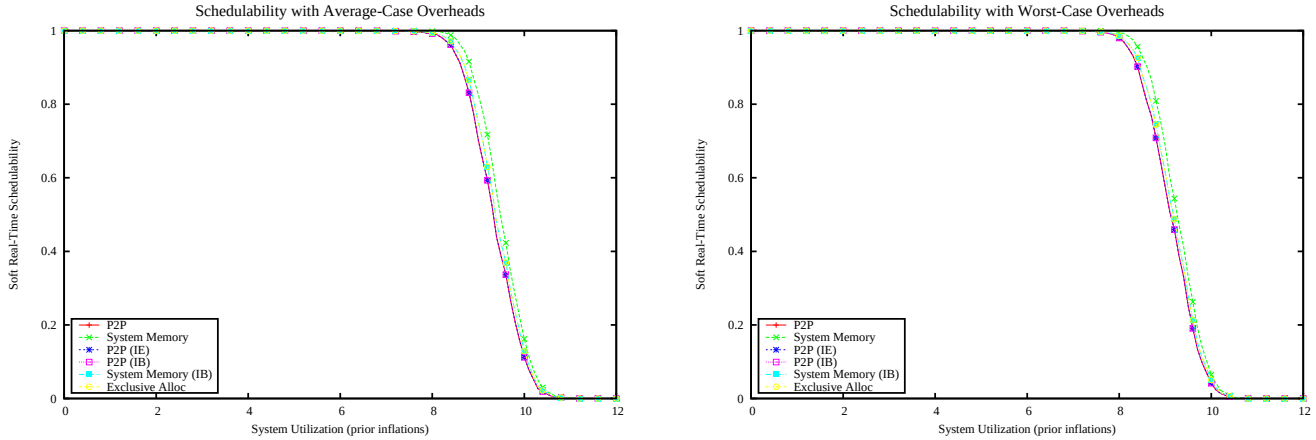

Figure 3937: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

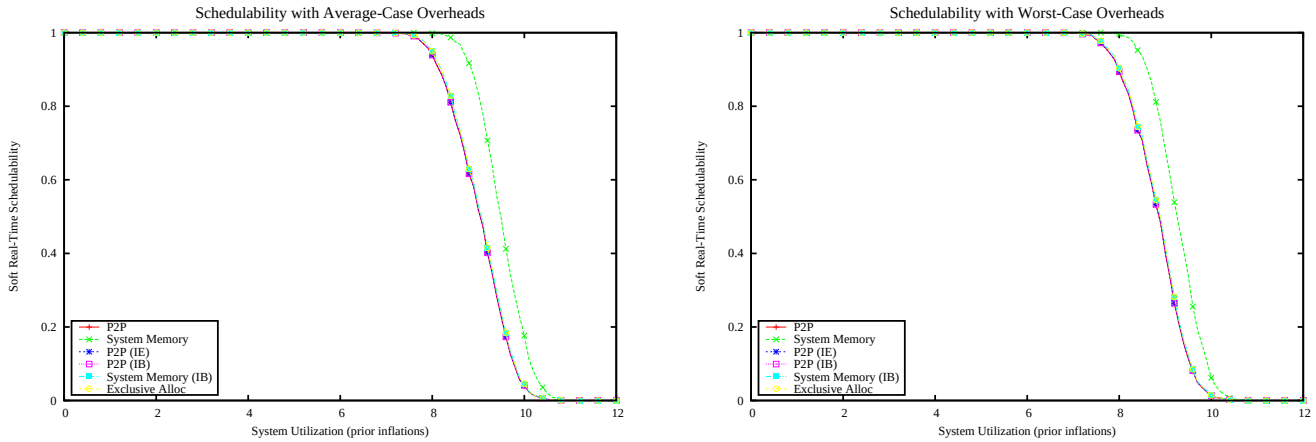

Figure 3938: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

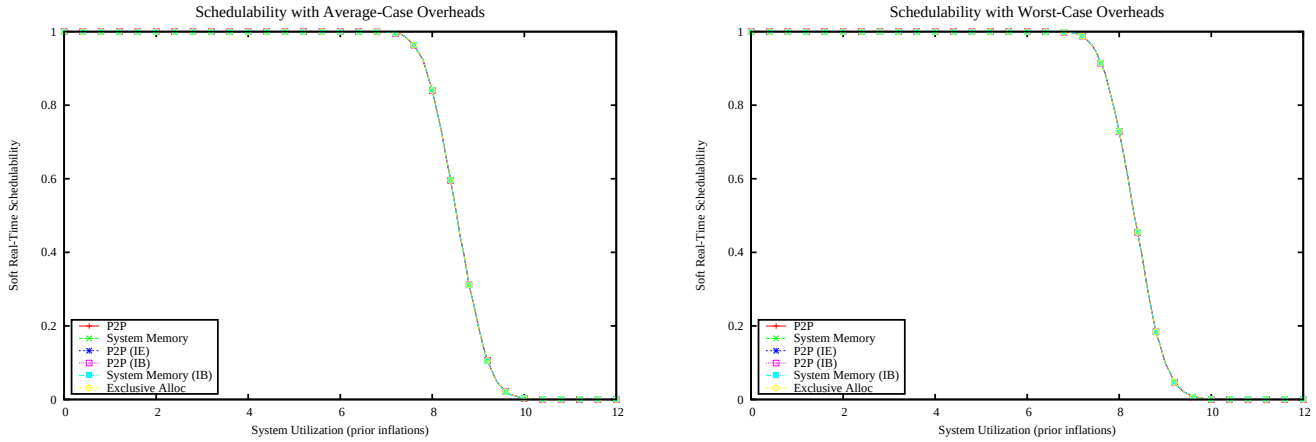

Figure 3939: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

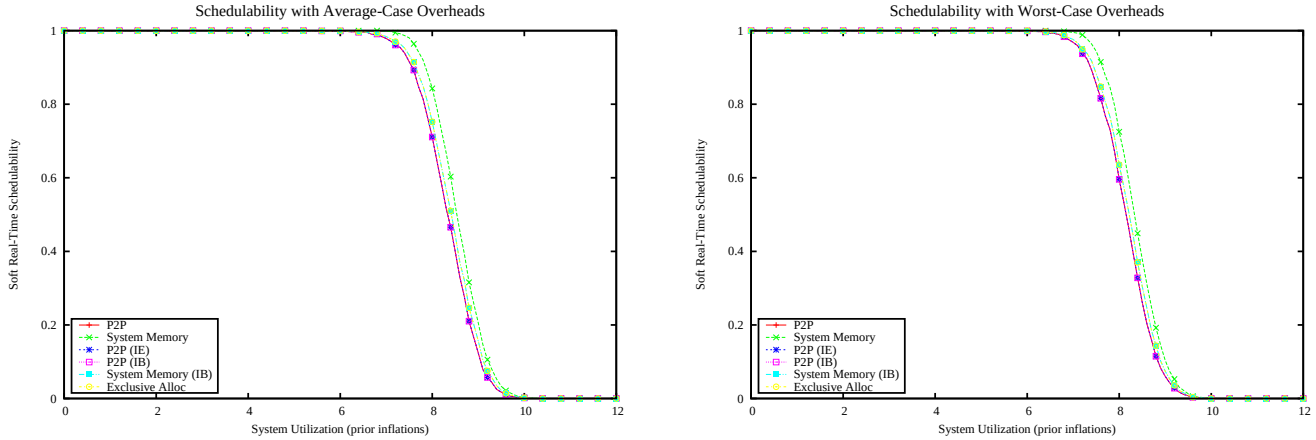

Figure 3940: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

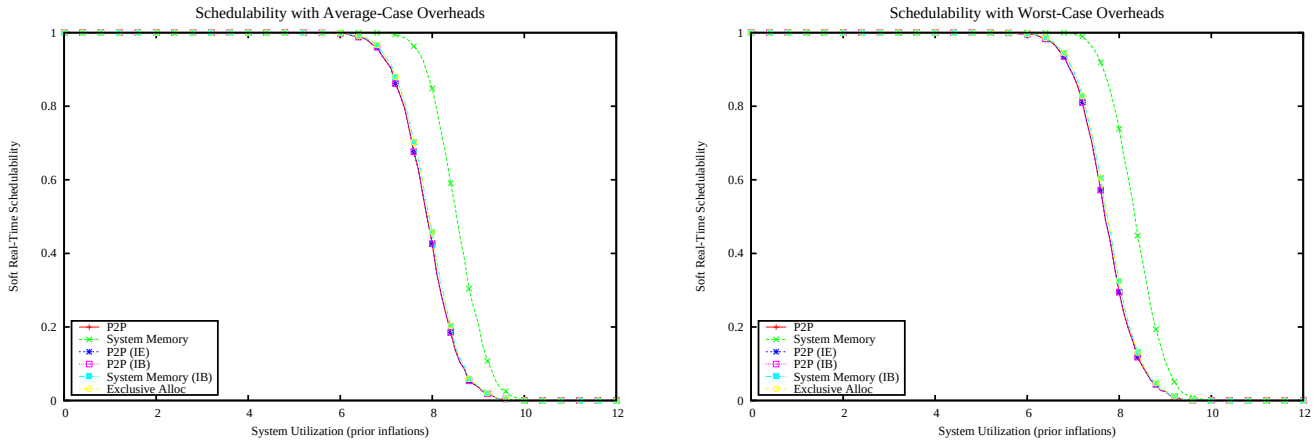

Figure 3941: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

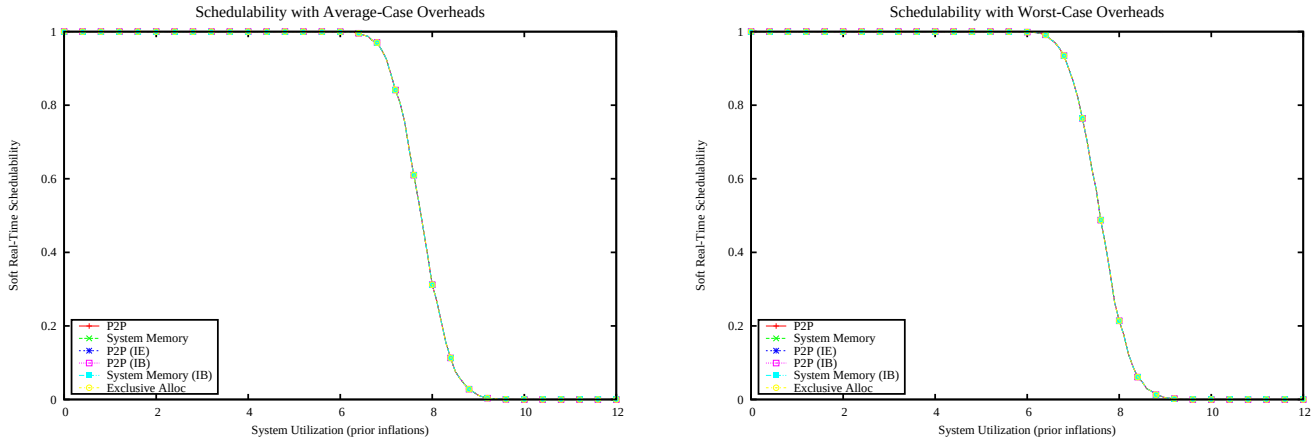

Figure 3942: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

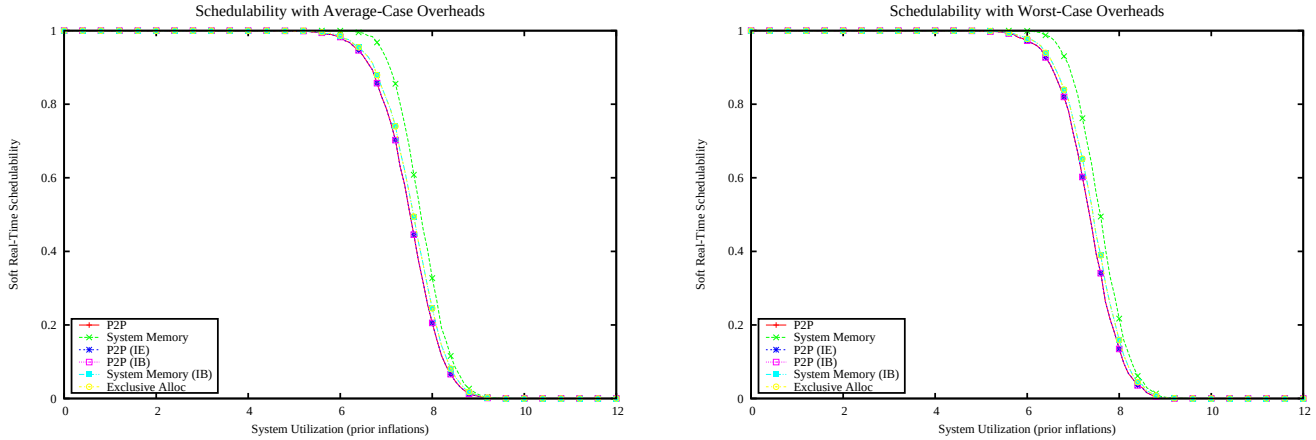

Figure 3943: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

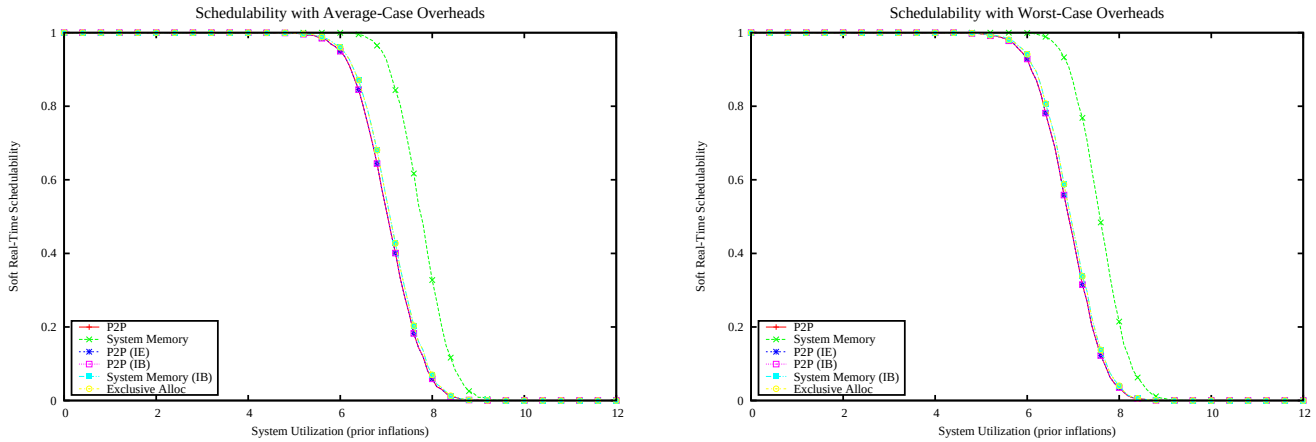

Figure 3944: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

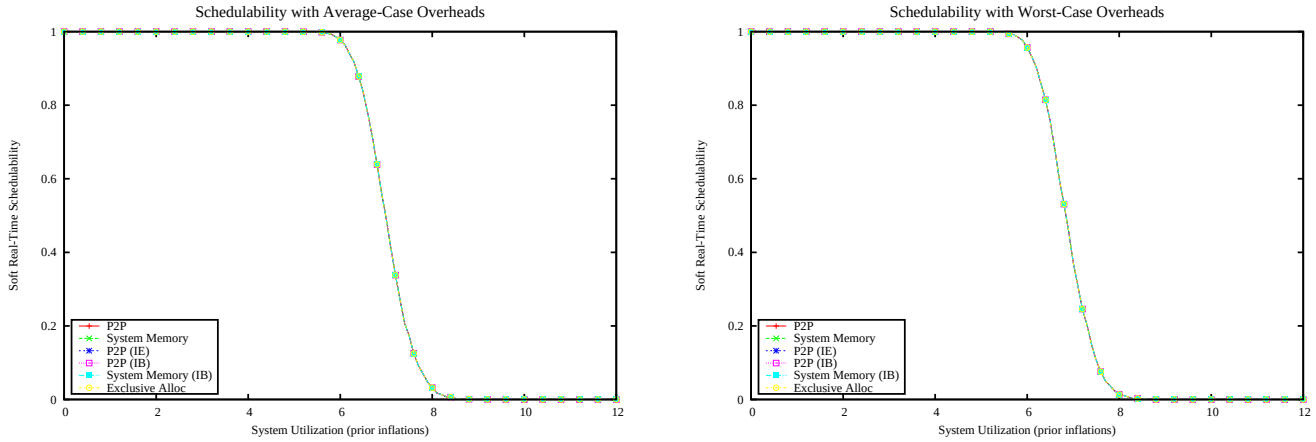

Figure 3945: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

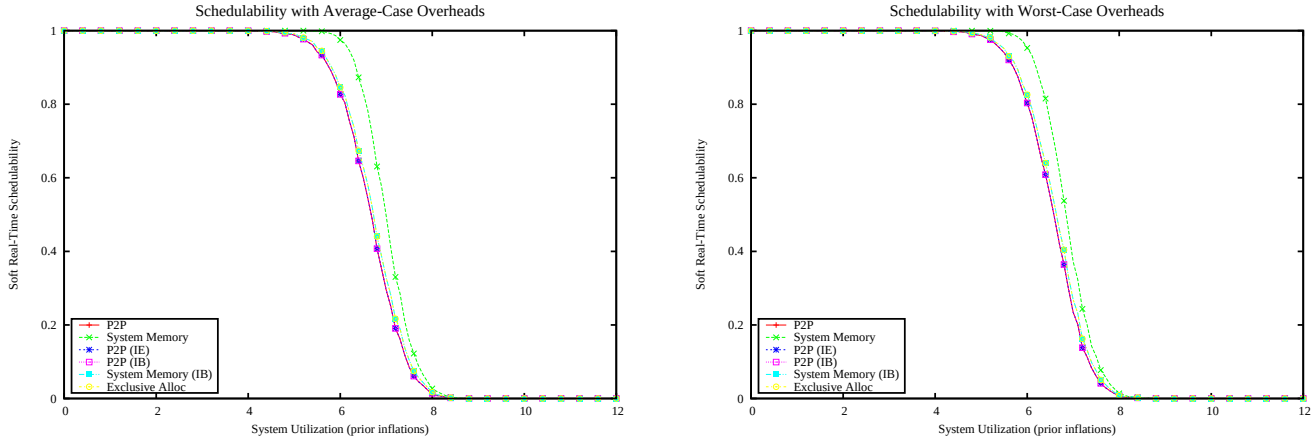

Figure 3946: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

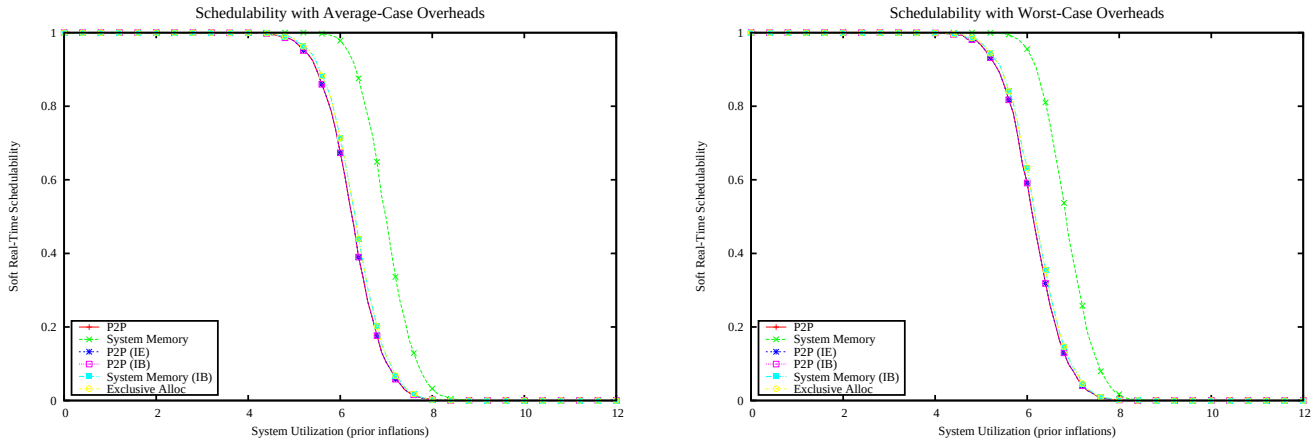

Figure 3947: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

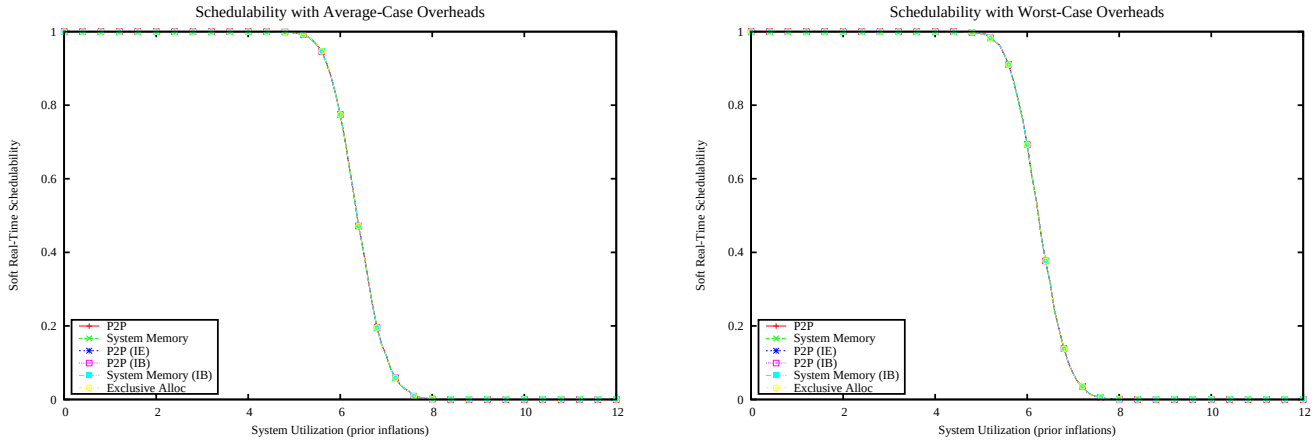

Figure 3948: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

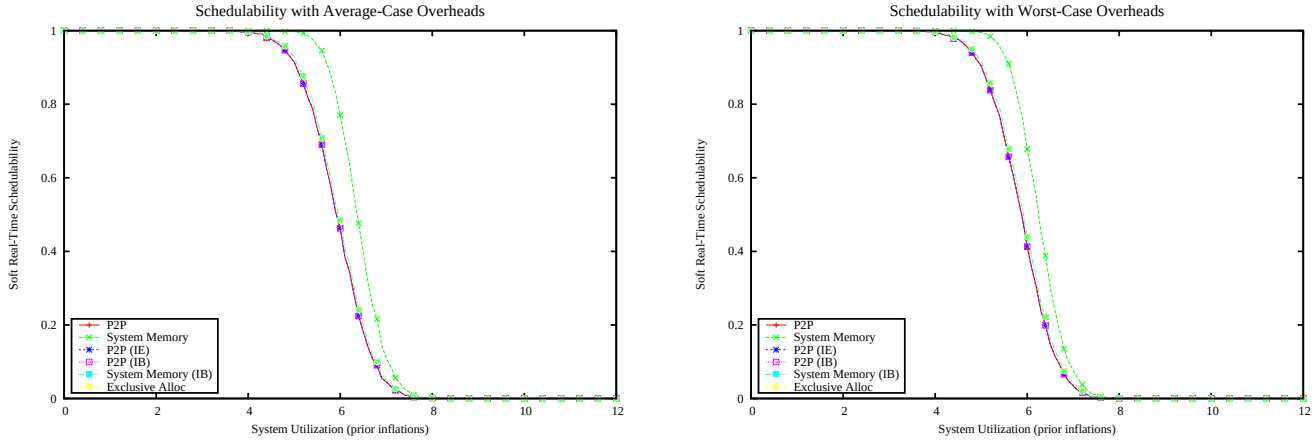

Figure 3949: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

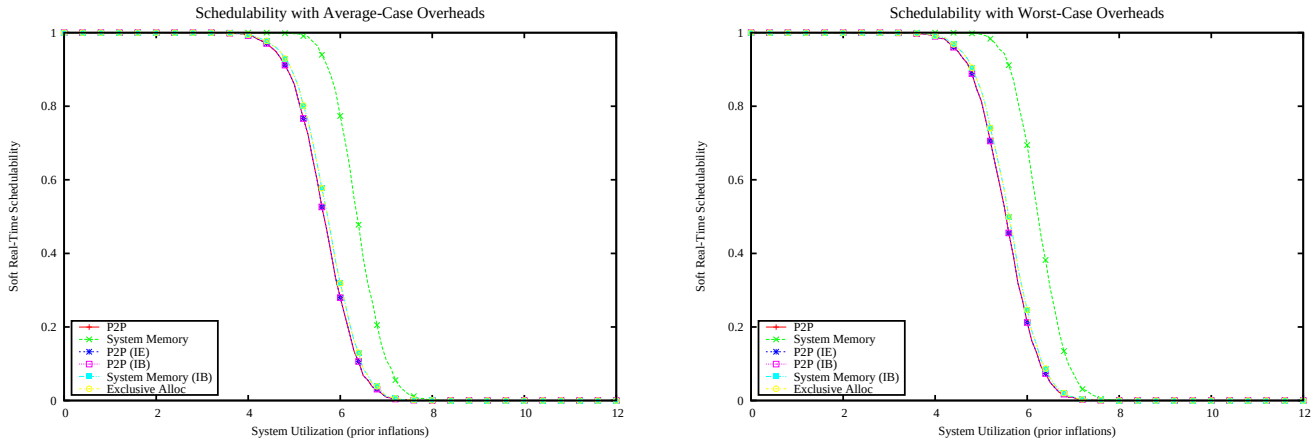

Figure 3950: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

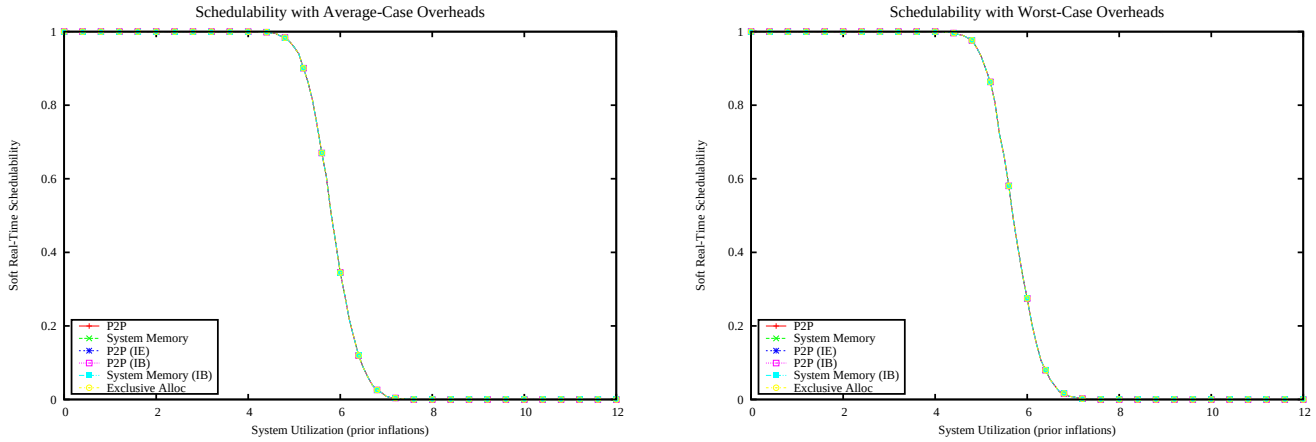

Figure 3951: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

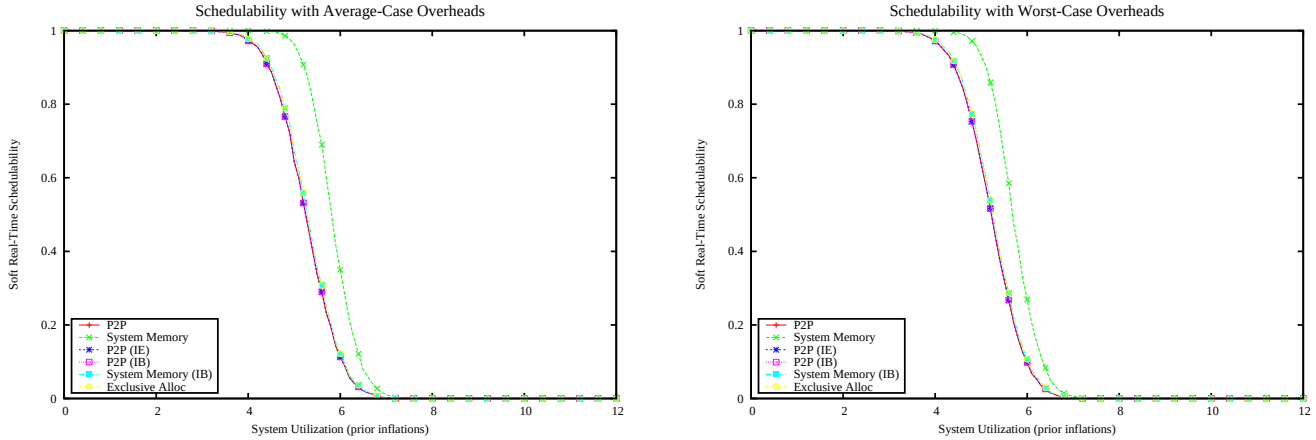

Figure 3952: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

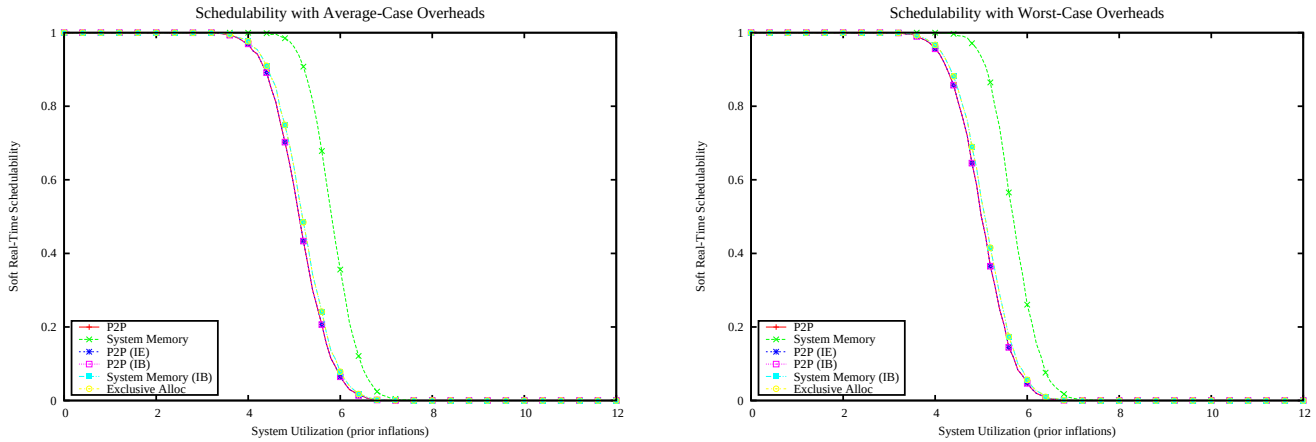

Figure 3953: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

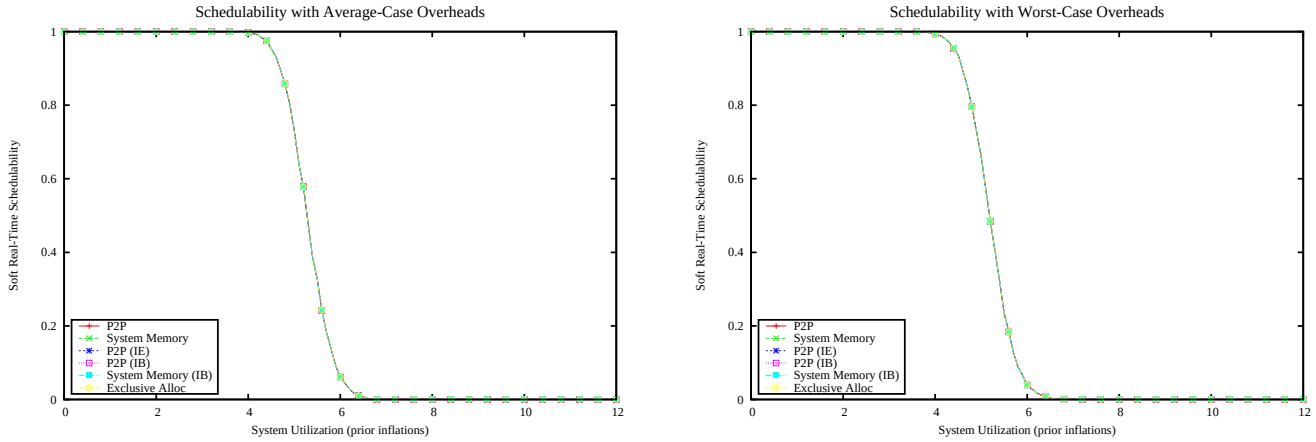

Figure 3954: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

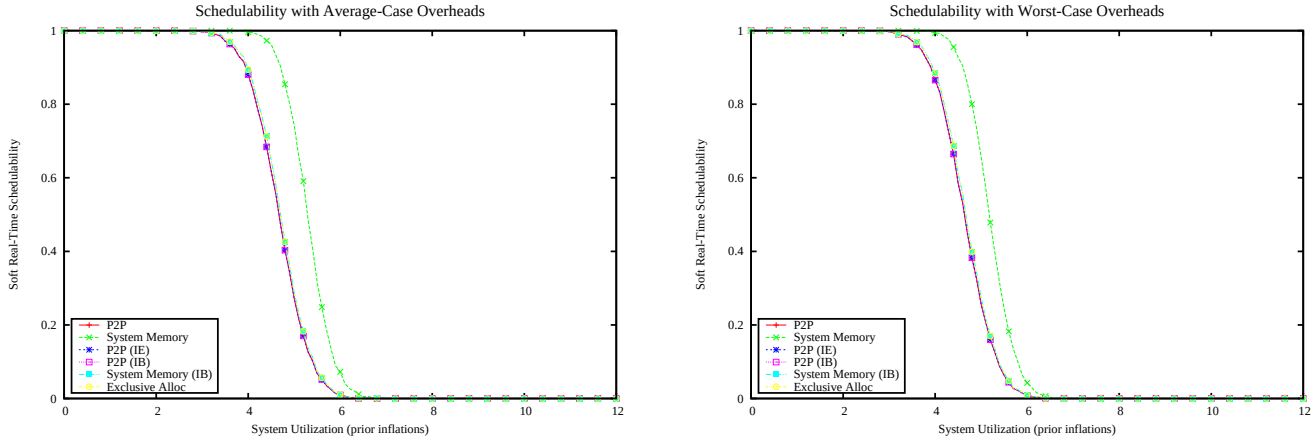

Figure 3955: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

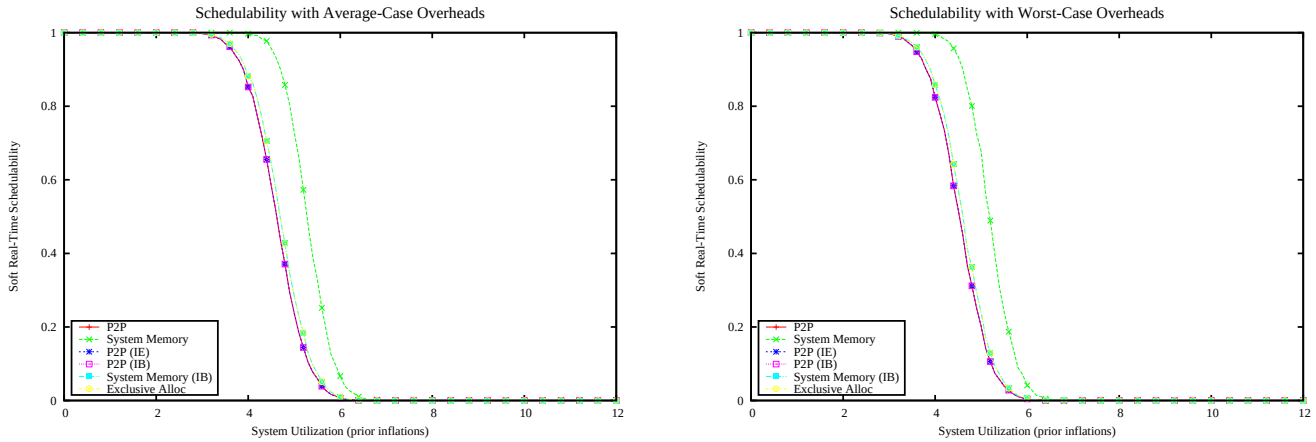

Figure 3956: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

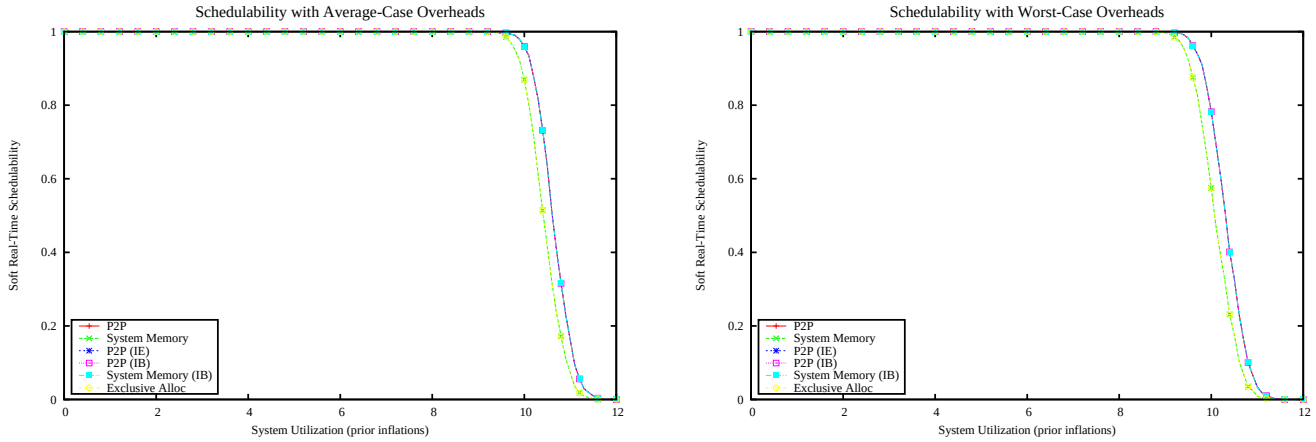

Figure 3957: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

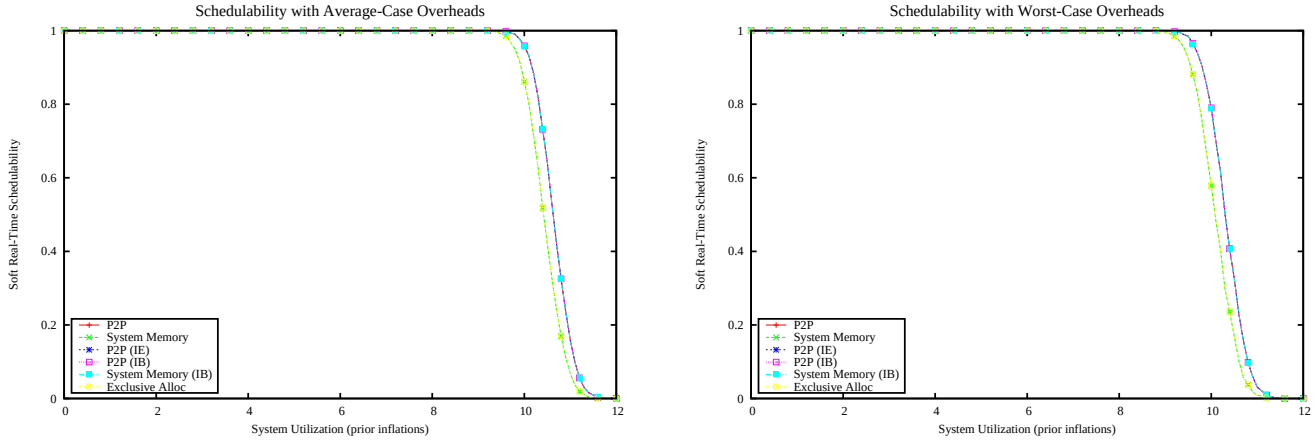

Figure 3958: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

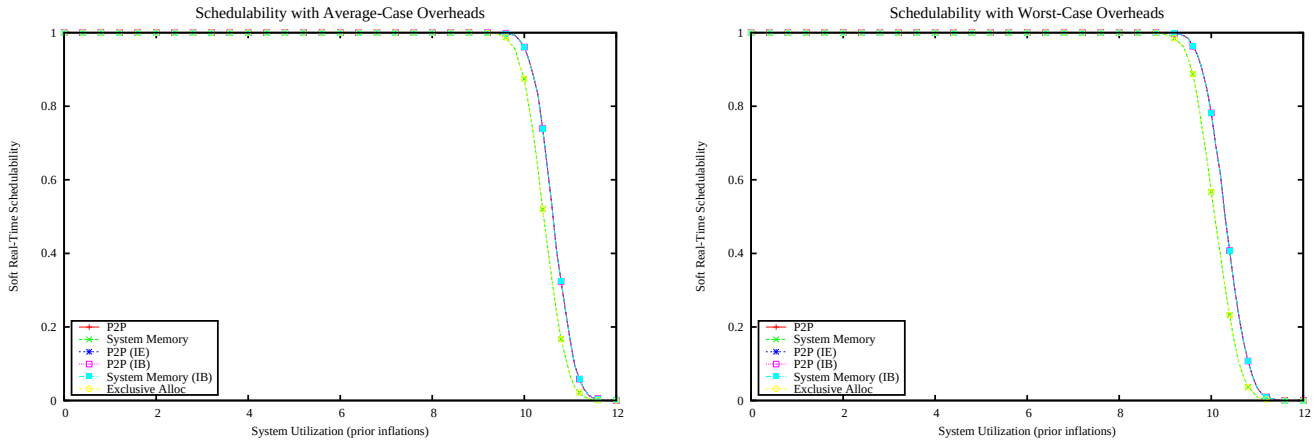

Figure 3959: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

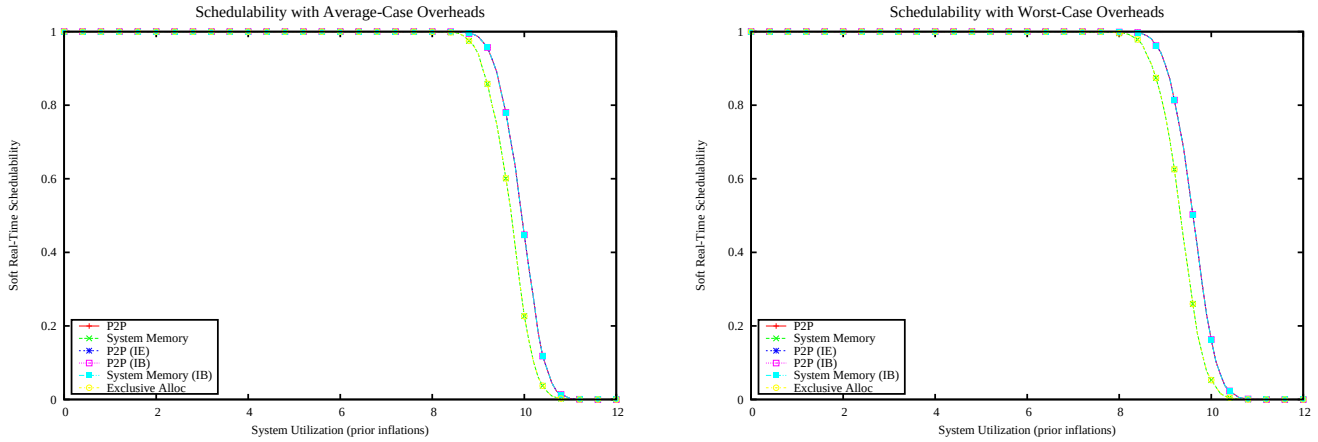

Figure 3960: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

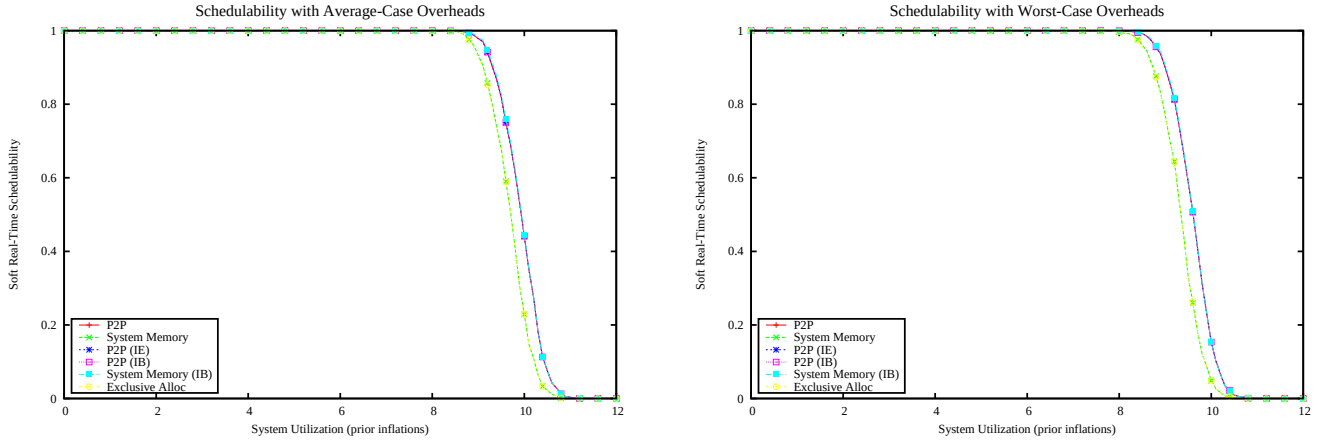

Figure 3961: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

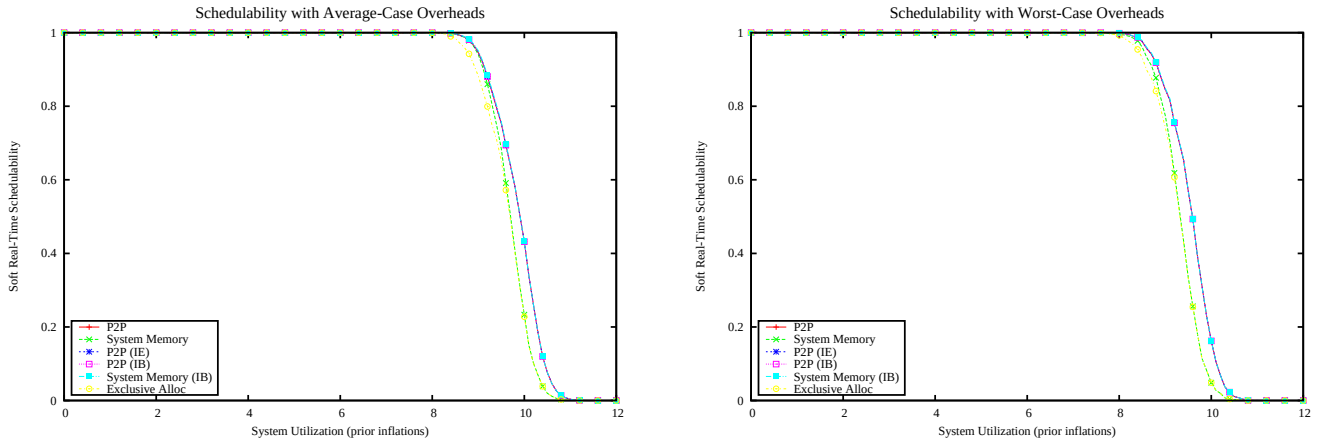

Figure 3962: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

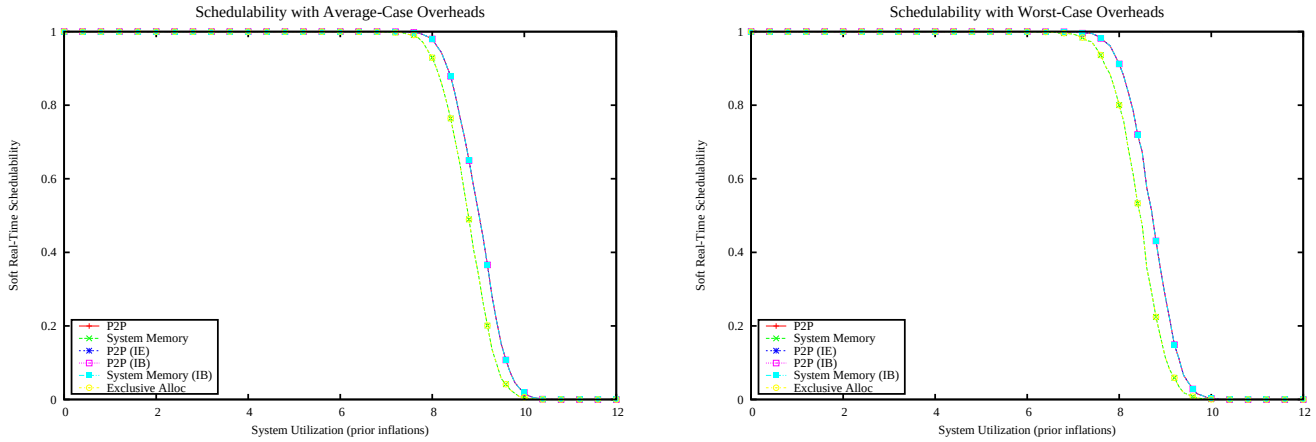

Figure 3963: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

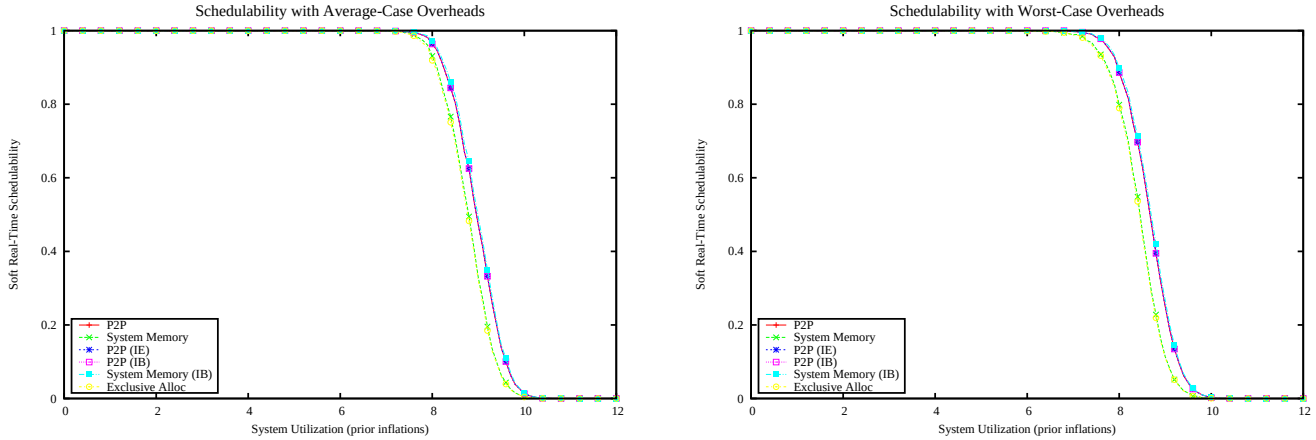

Figure 3964: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

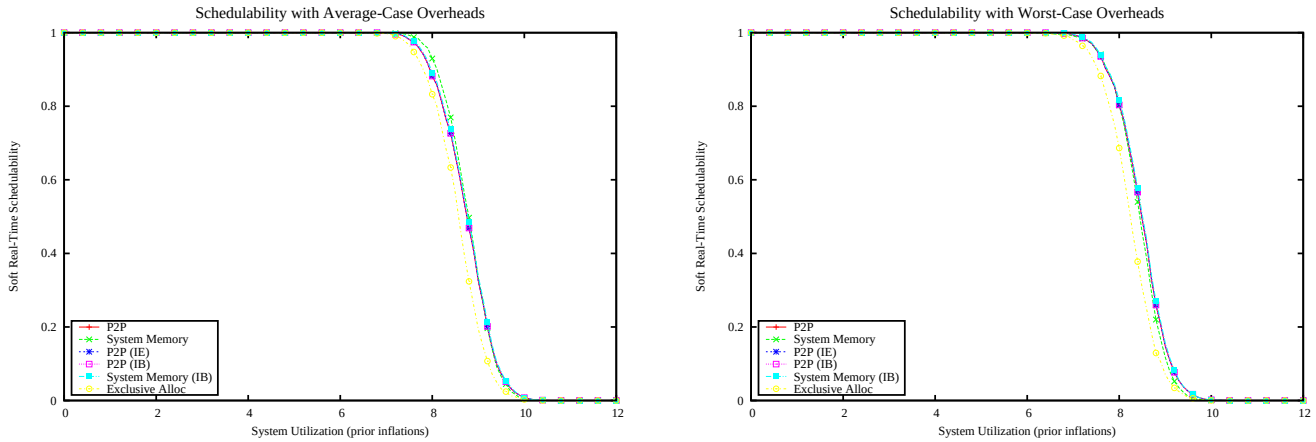

Figure 3965: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

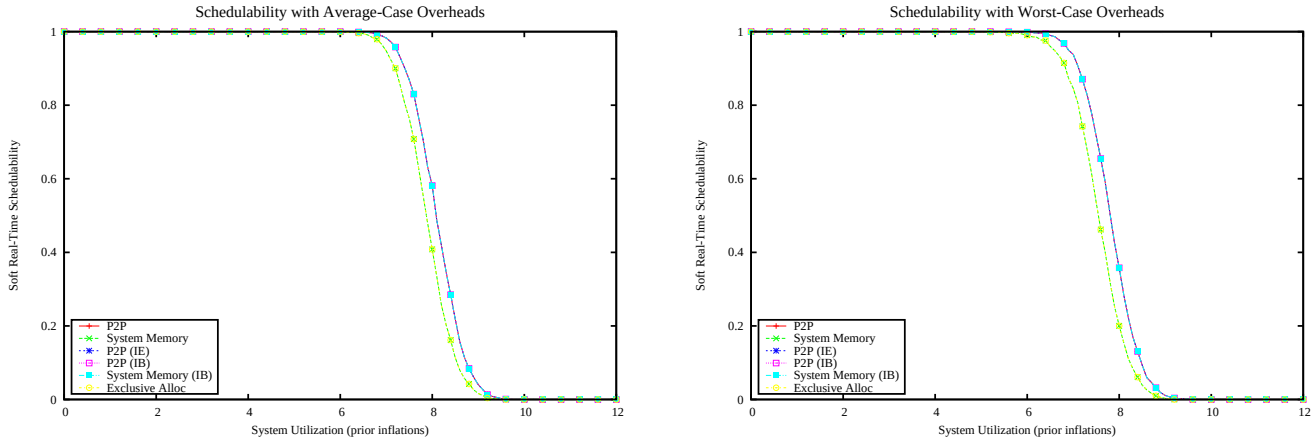

Figure 3966: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

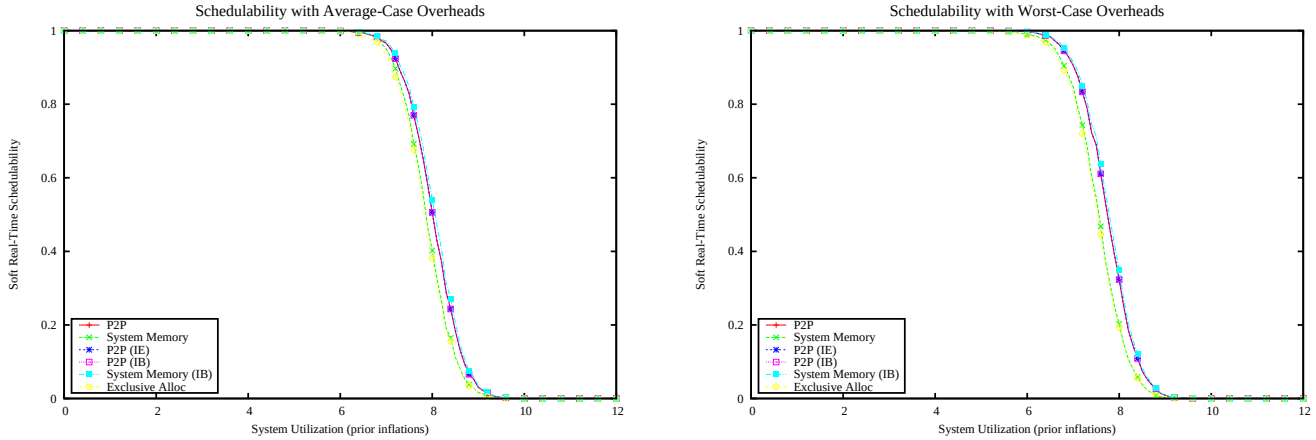

Figure 3967: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

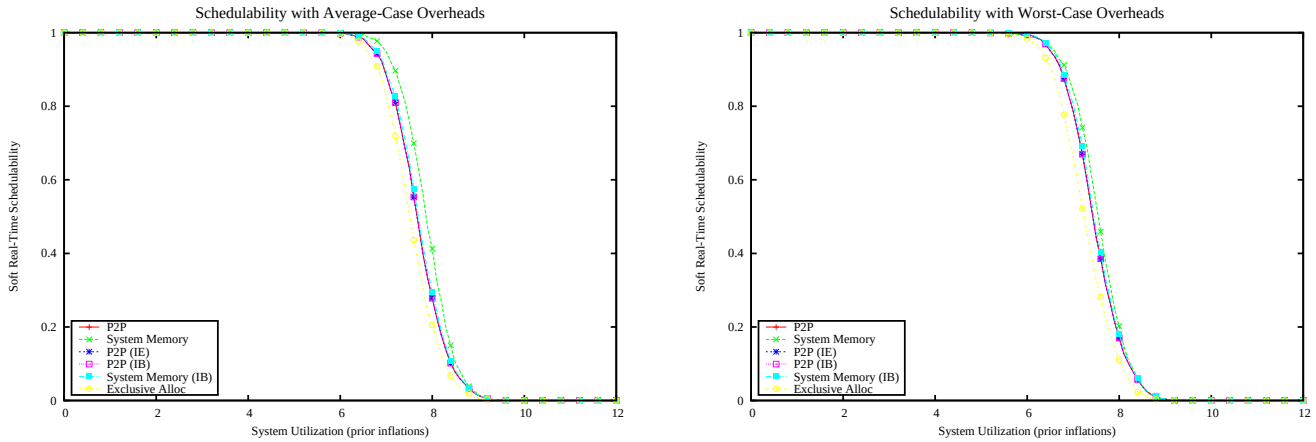

Figure 3968: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

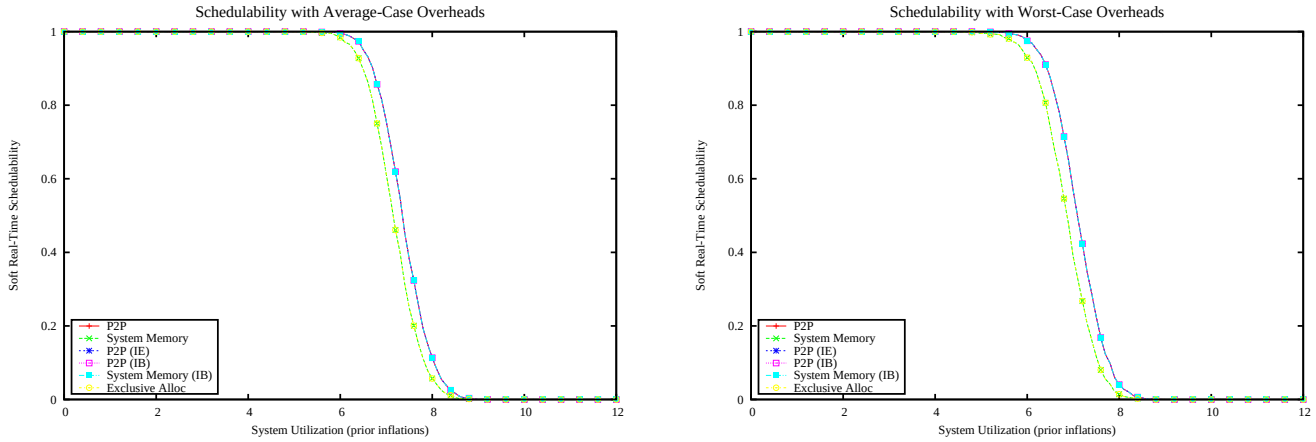

Figure 3969: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

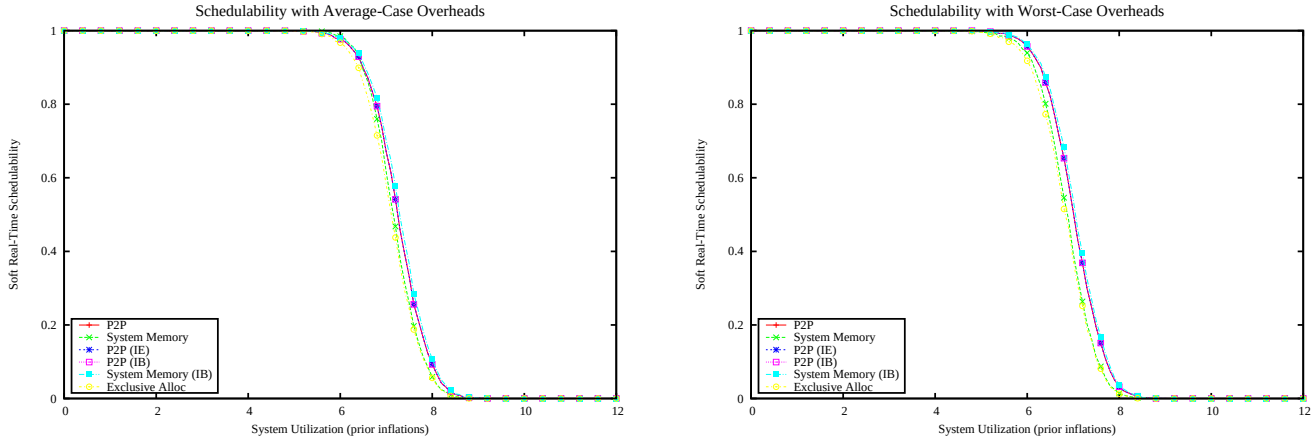

Figure 3970: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

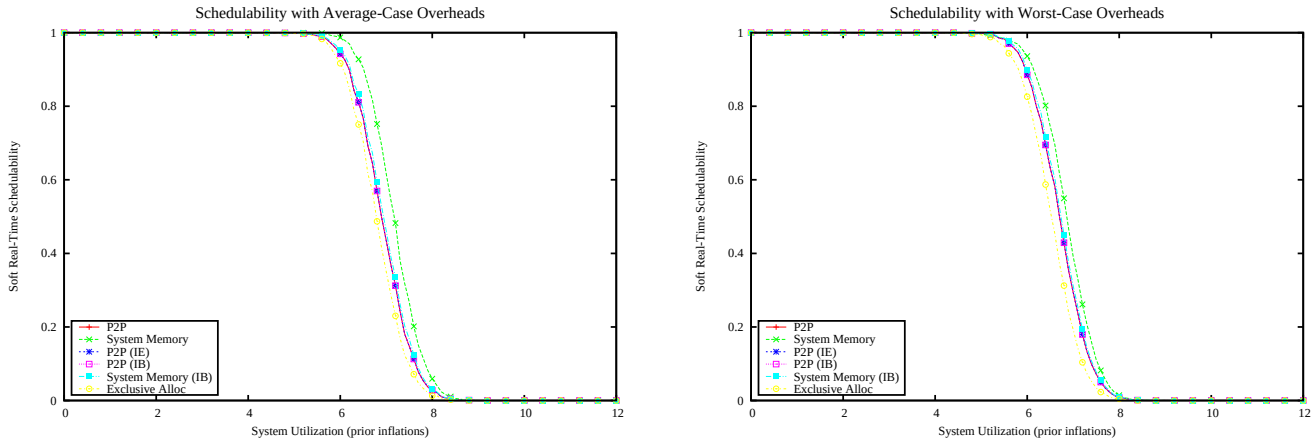

Figure 3971: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

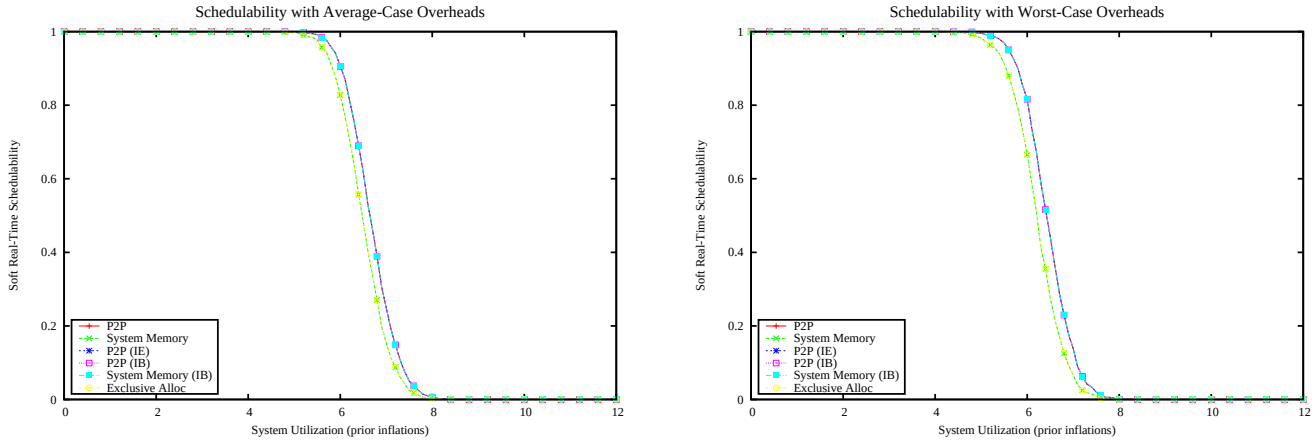

Figure 3972: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

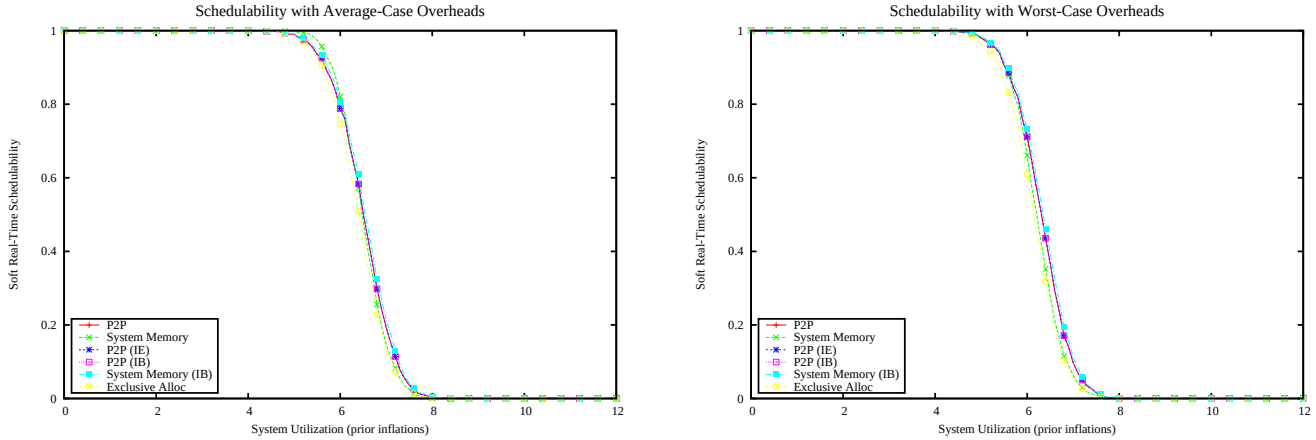

Figure 3973: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

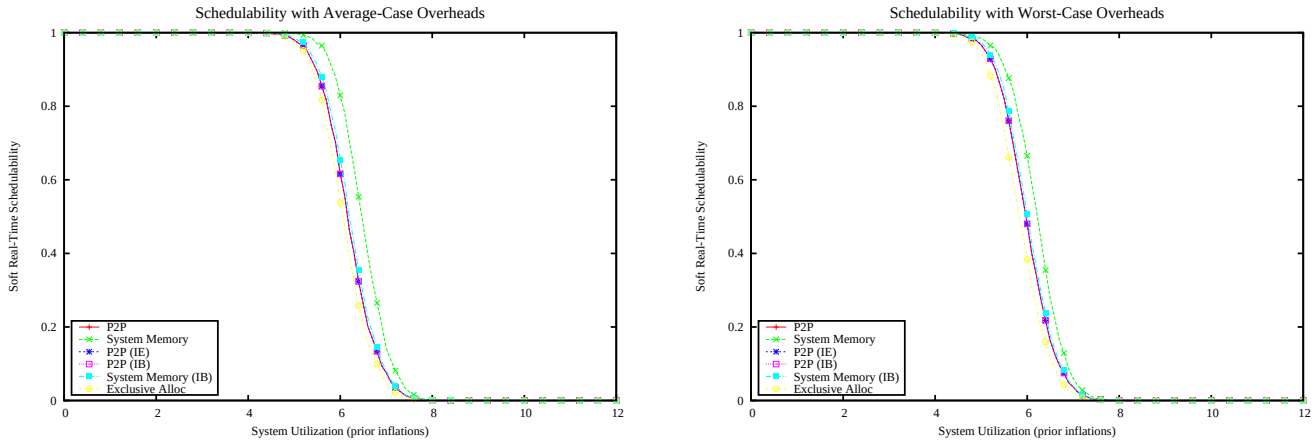

Figure 3974: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

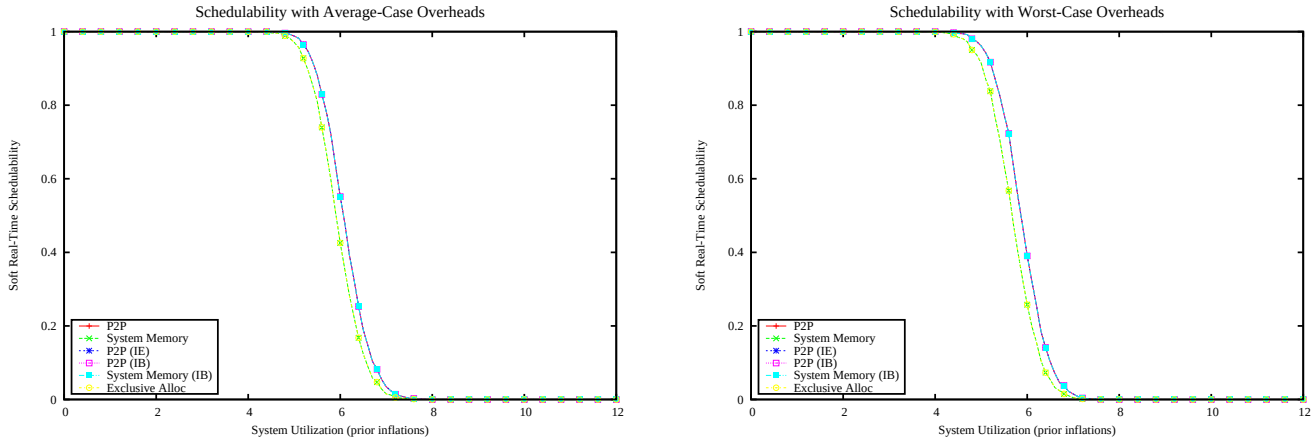

Figure 3975: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

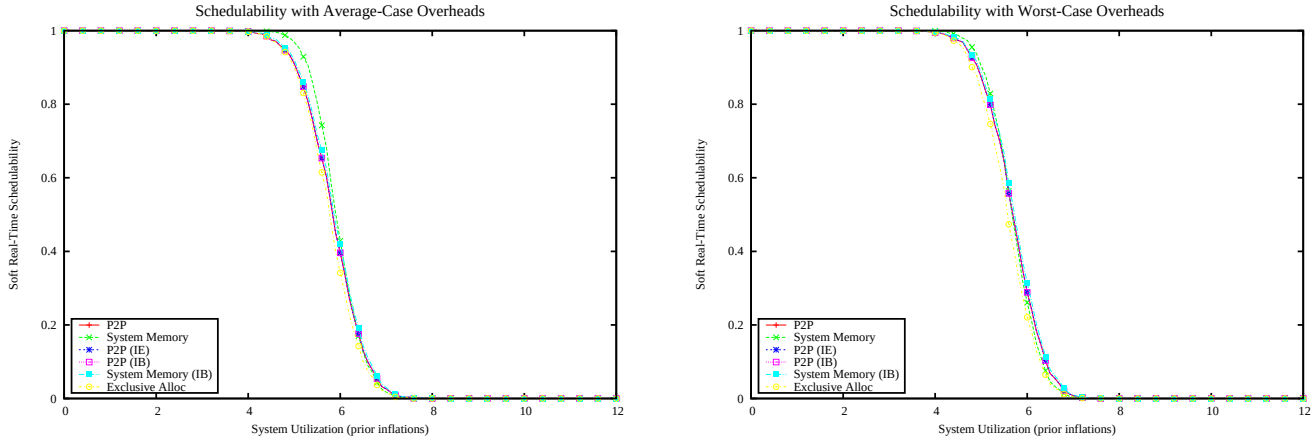

Figure 3976: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

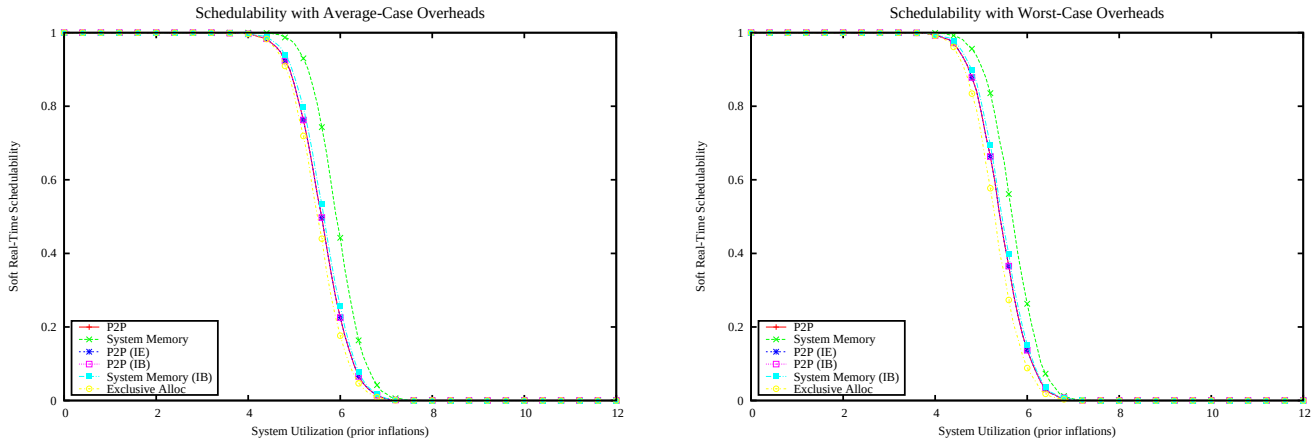

Figure 3977: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

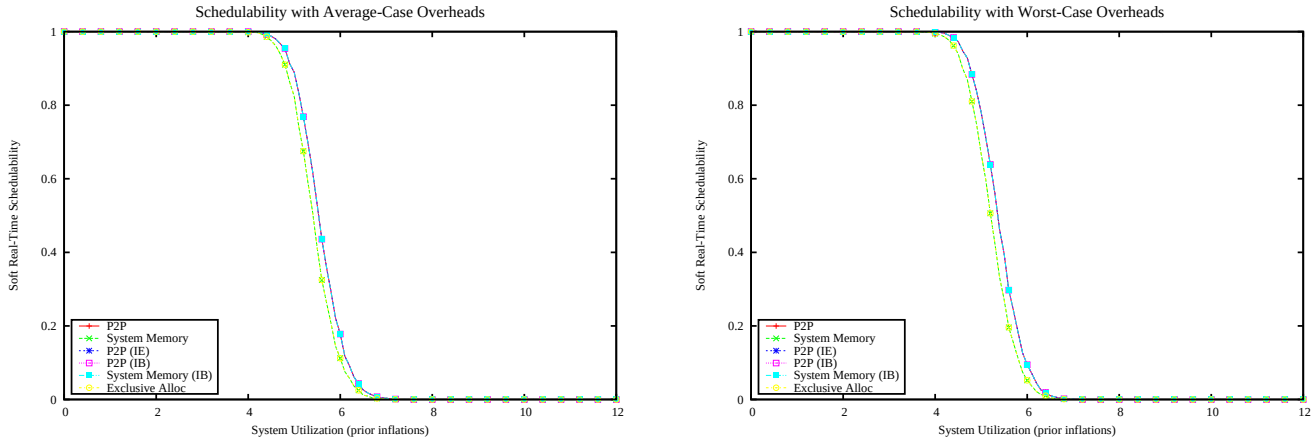

Figure 3978: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

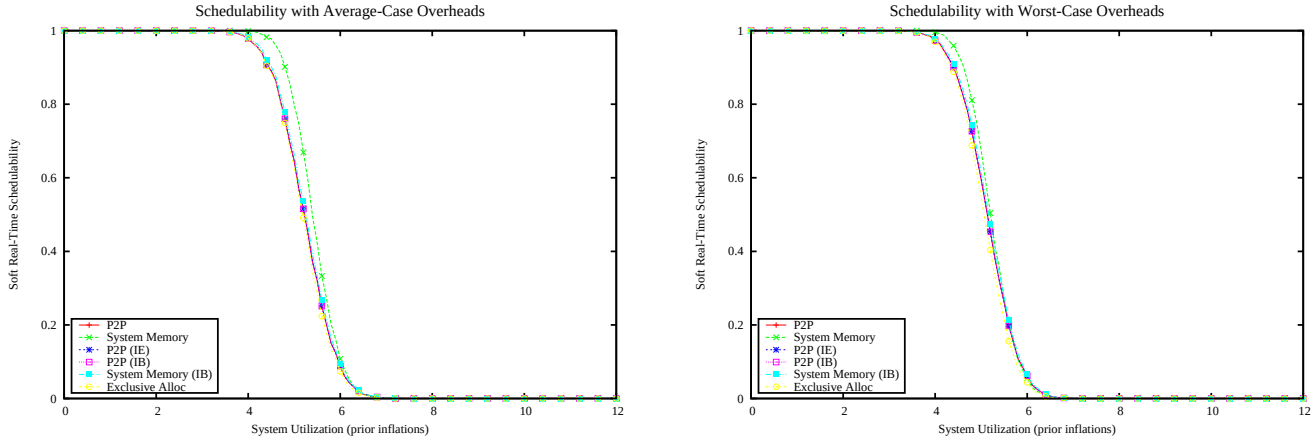

Figure 3979: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

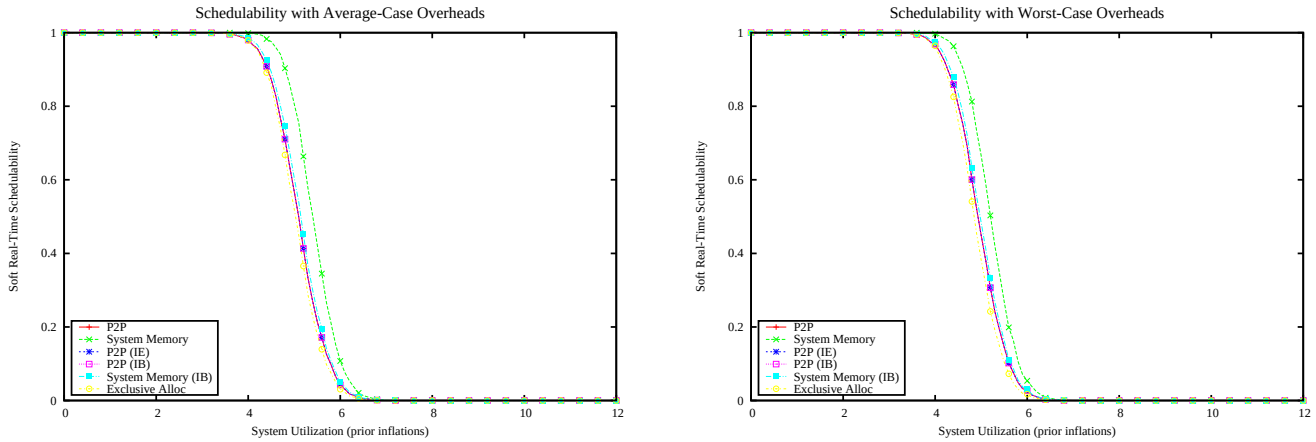

Figure 3980: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

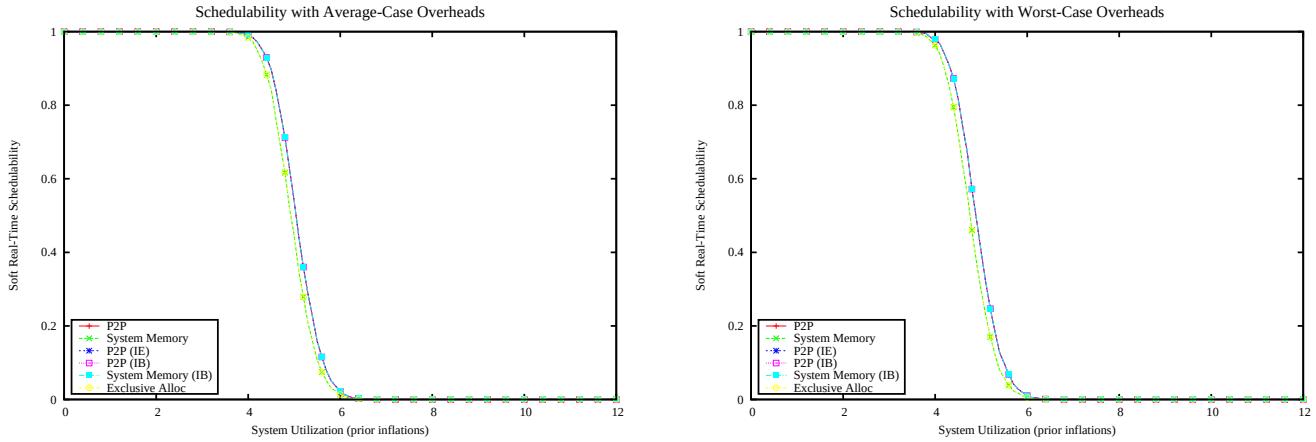

Figure 3981: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

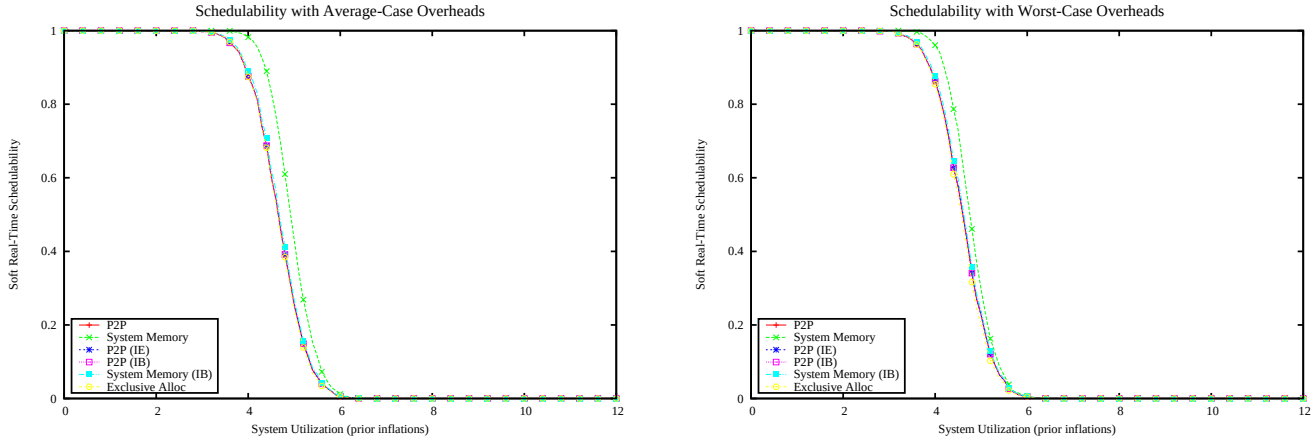

Figure 3982: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

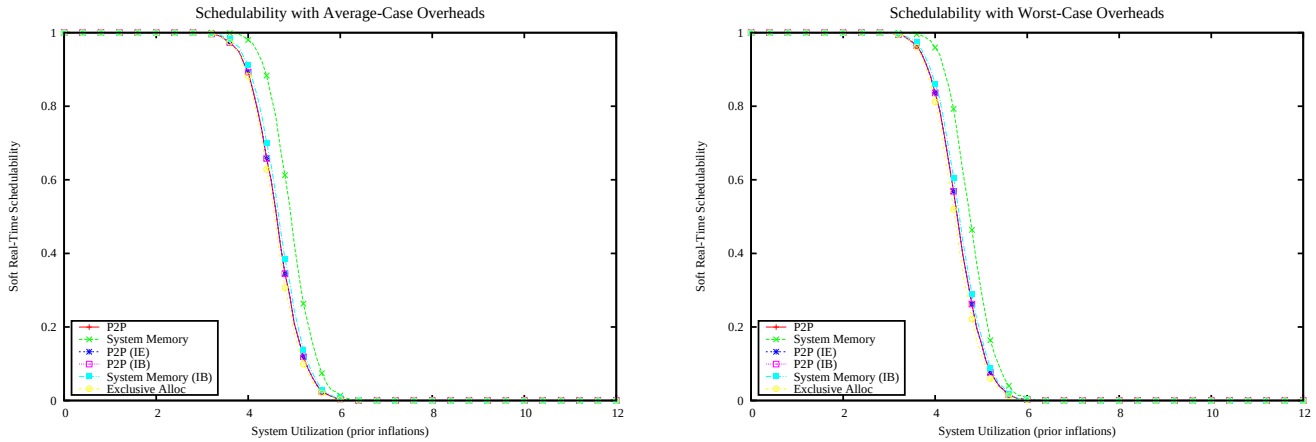

Figure 3983: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

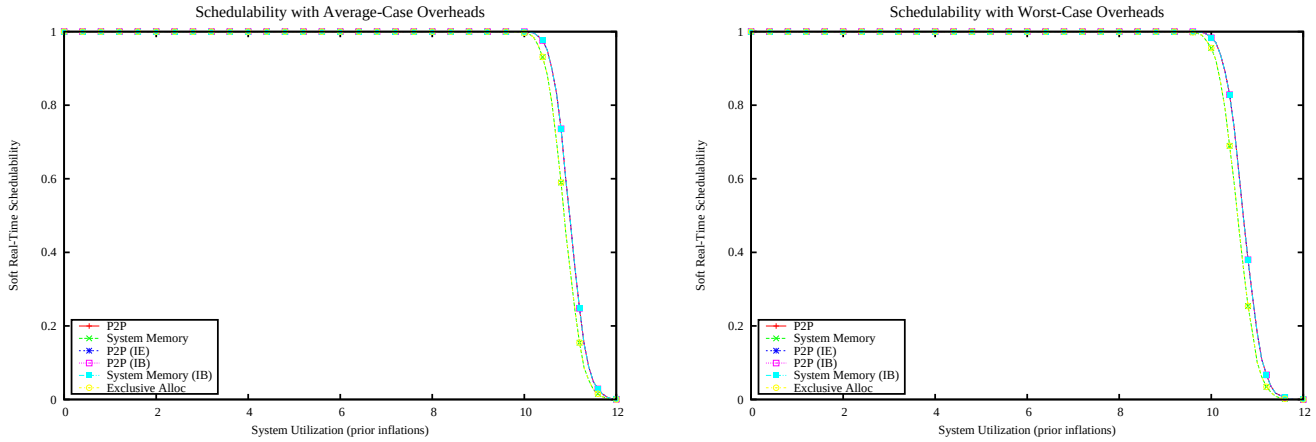

Figure 3984: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

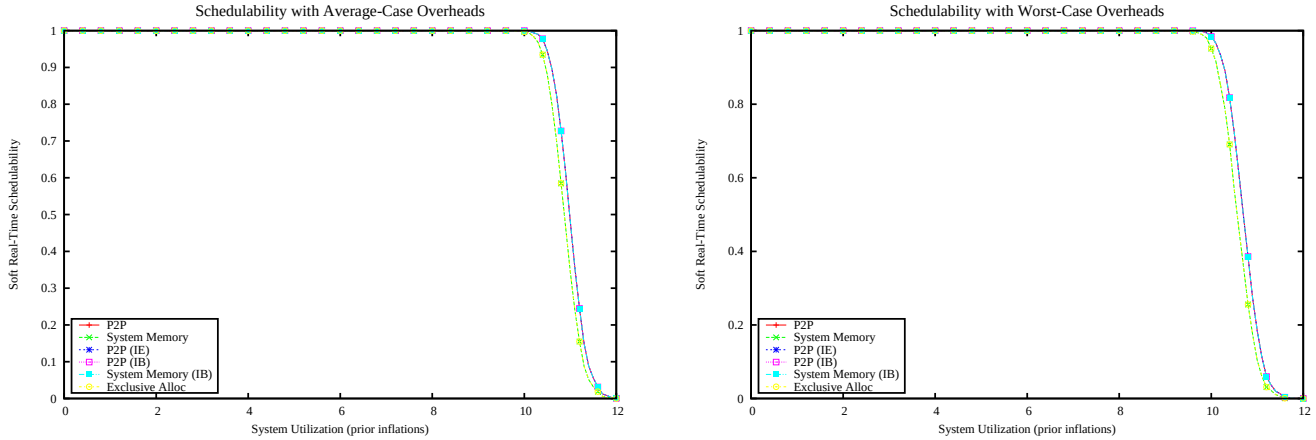

Figure 3985: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

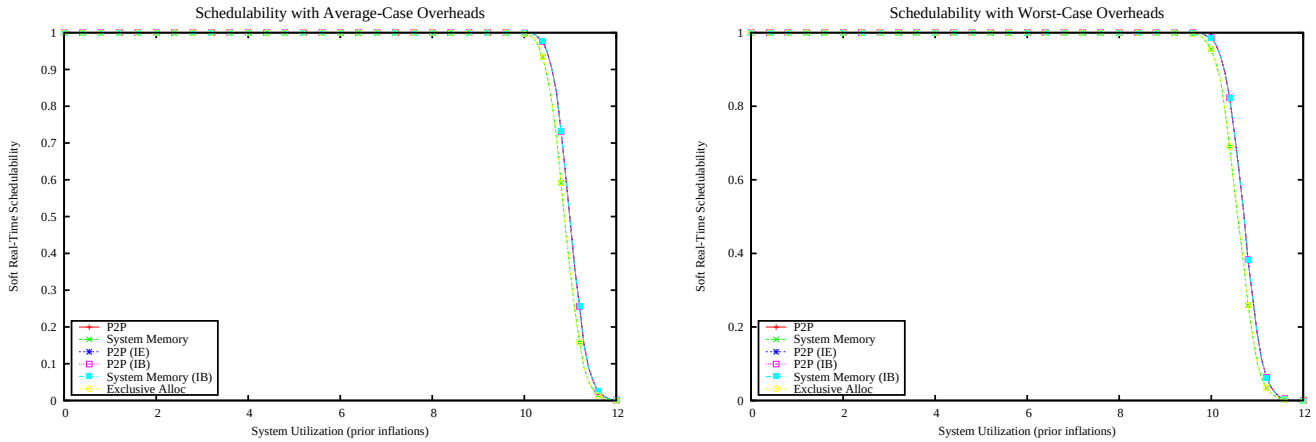

Figure 3986: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

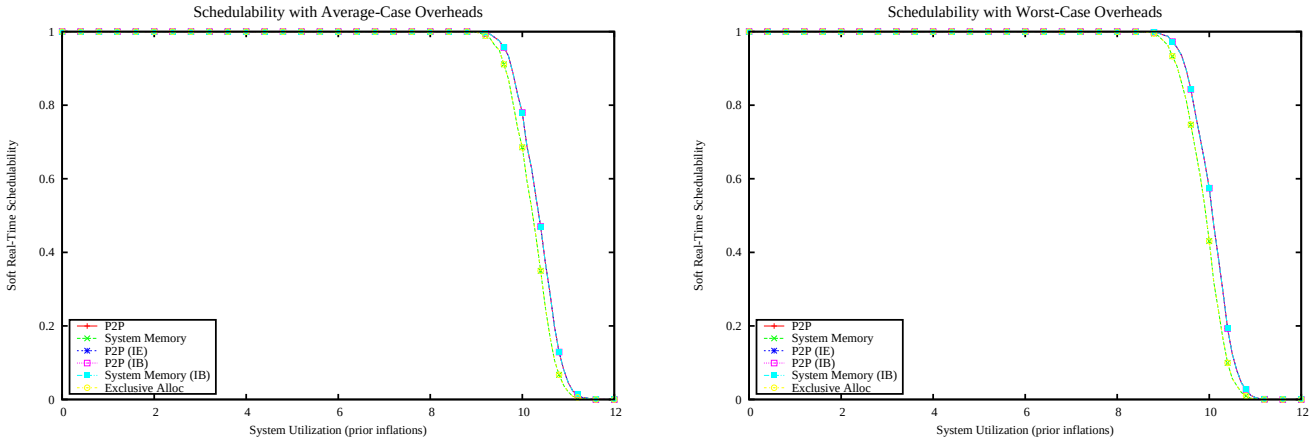

Figure 3987: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

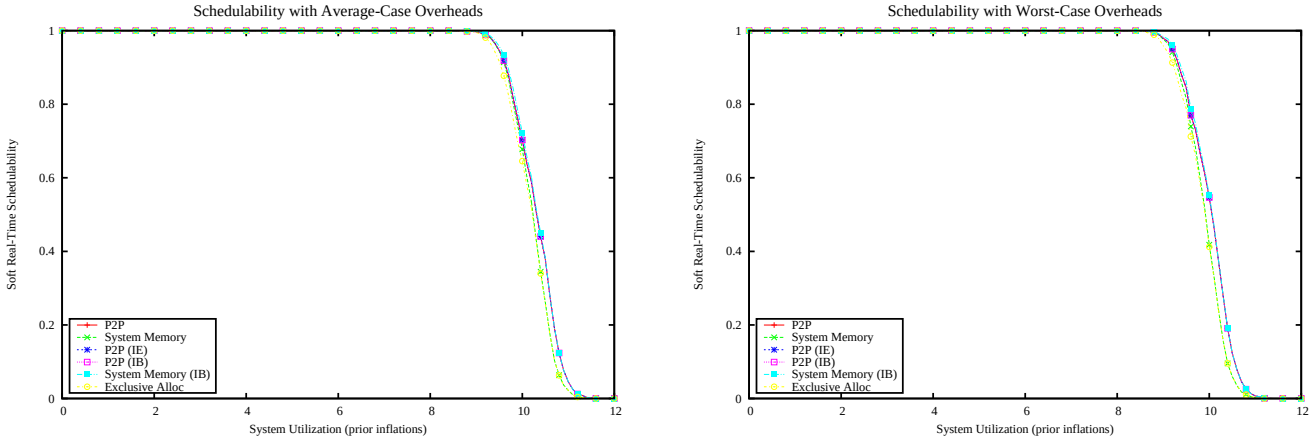

Figure 3988: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

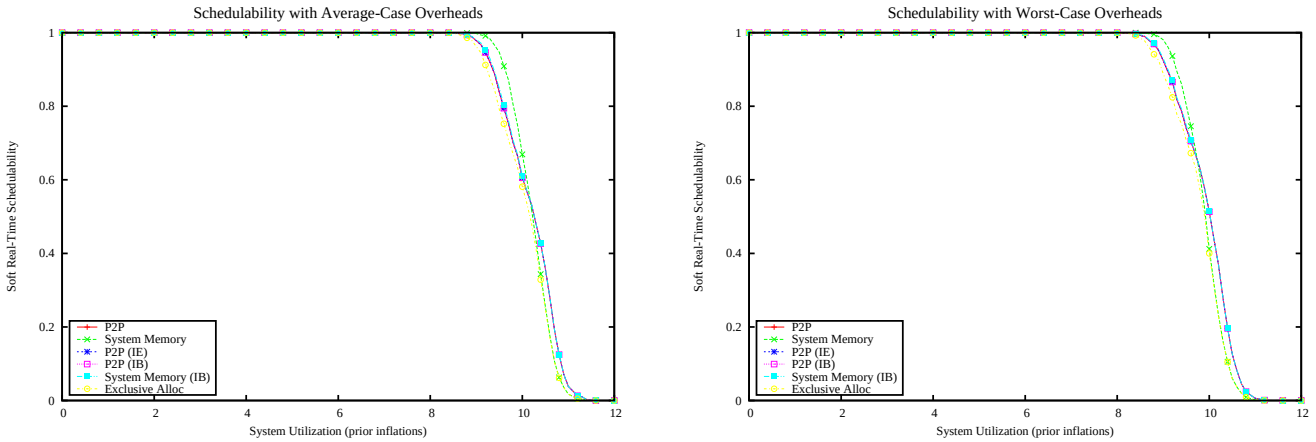

Figure 3989: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

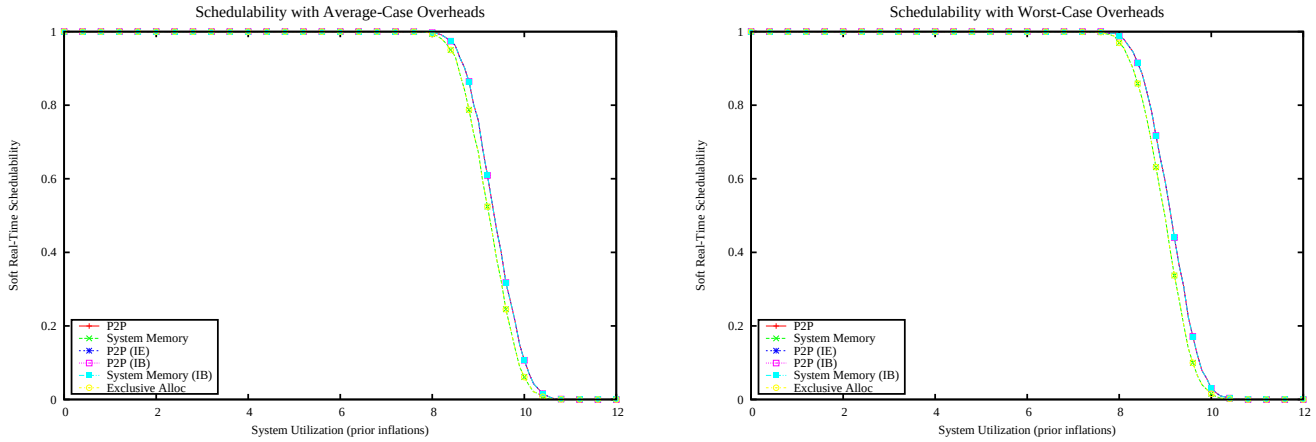

Figure 3990: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

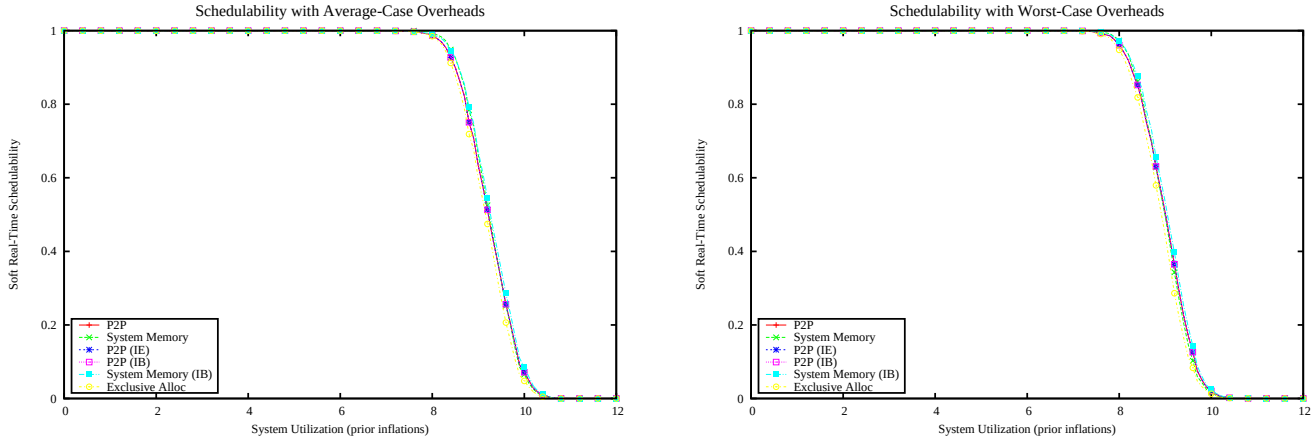

Figure 3991: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

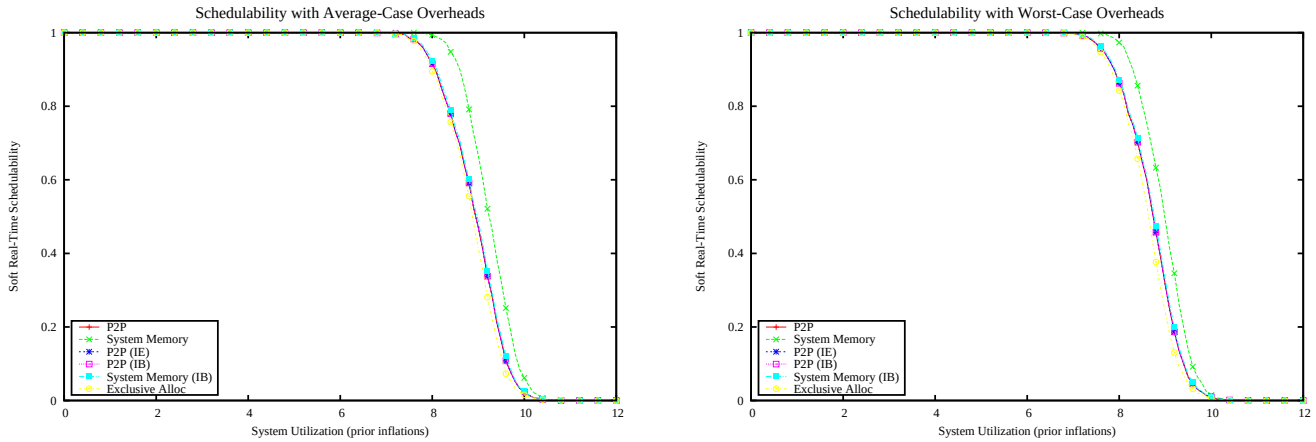

Figure 3992: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

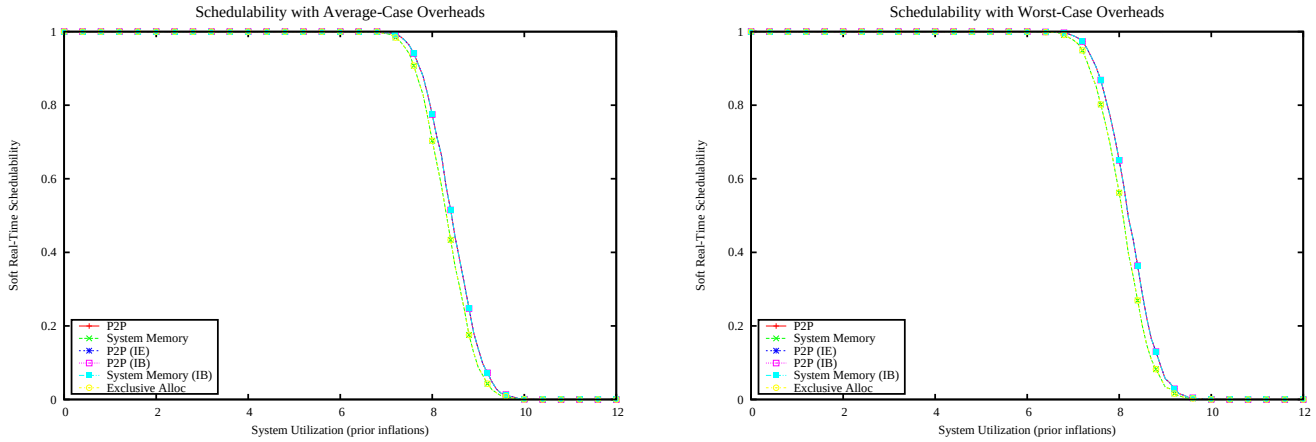

Figure 3993: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

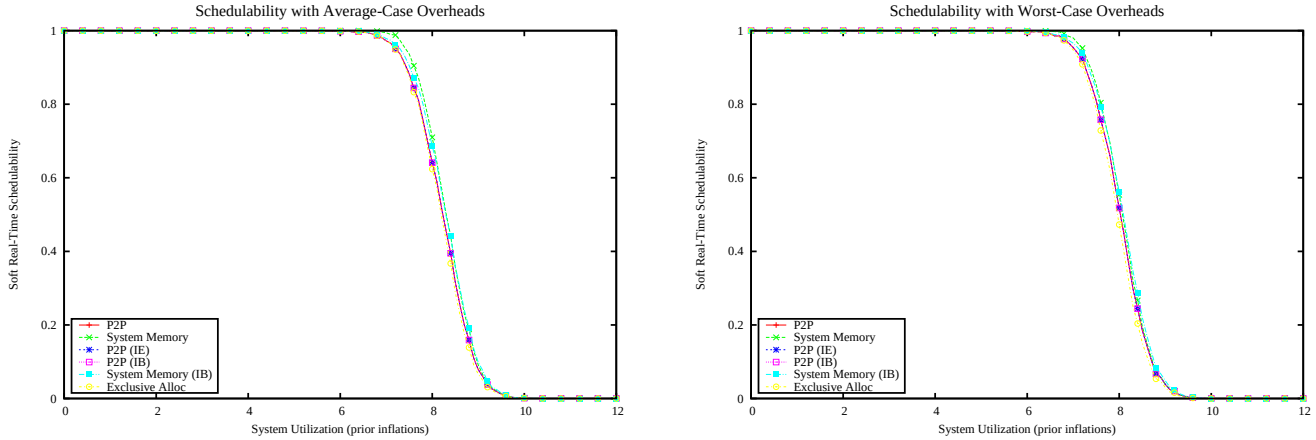

Figure 3994: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

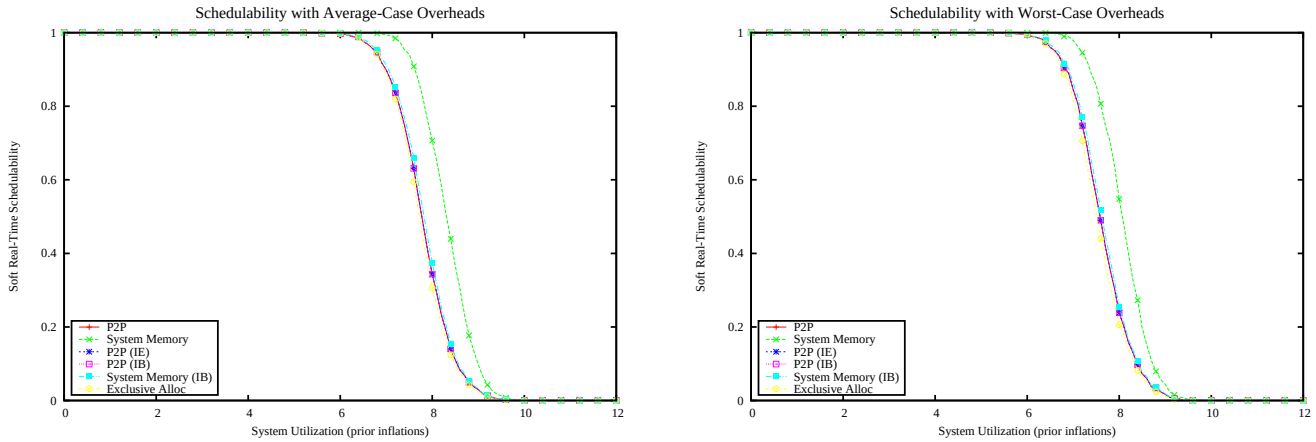

Figure 3995: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

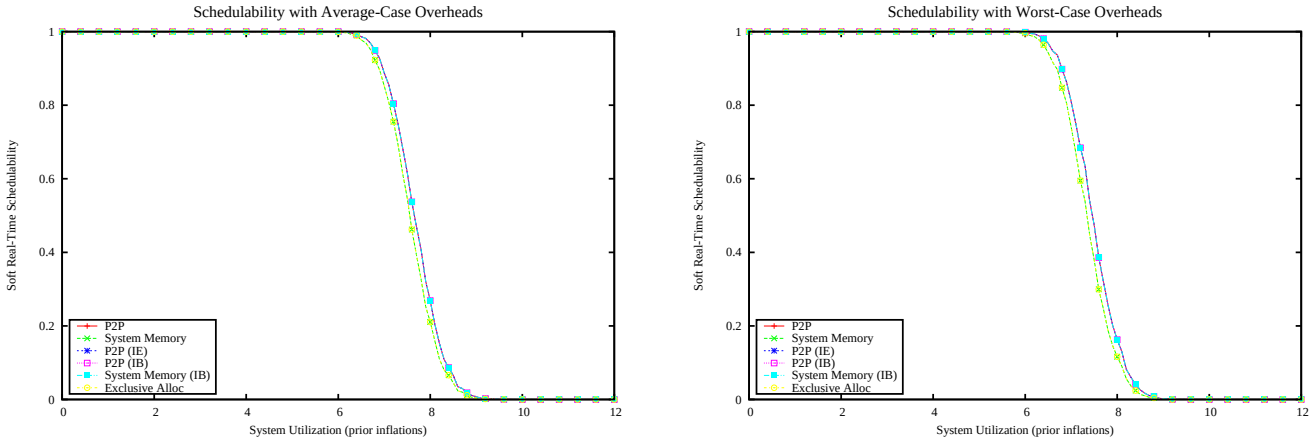

Figure 3996: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

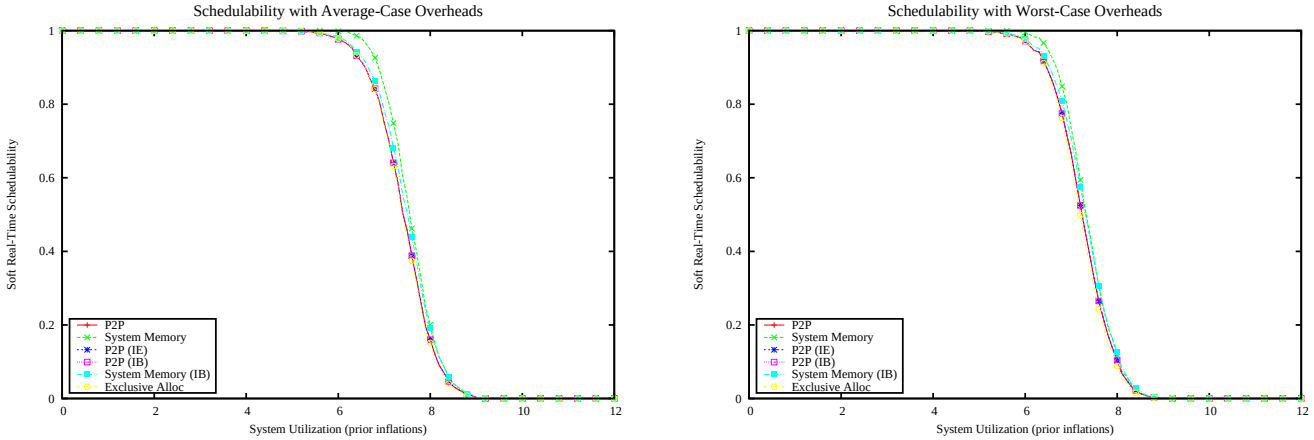

Figure 3997: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

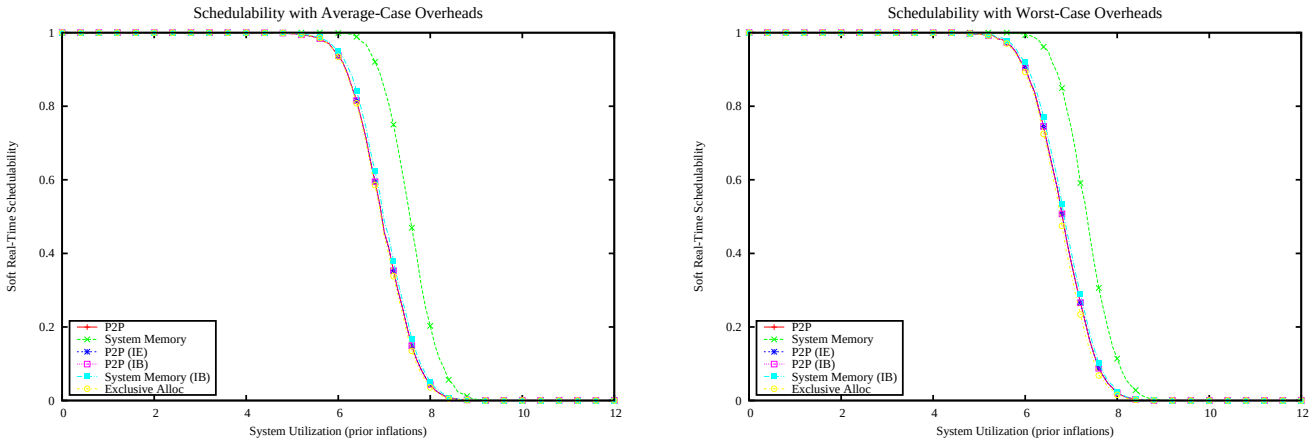

Figure 3998: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

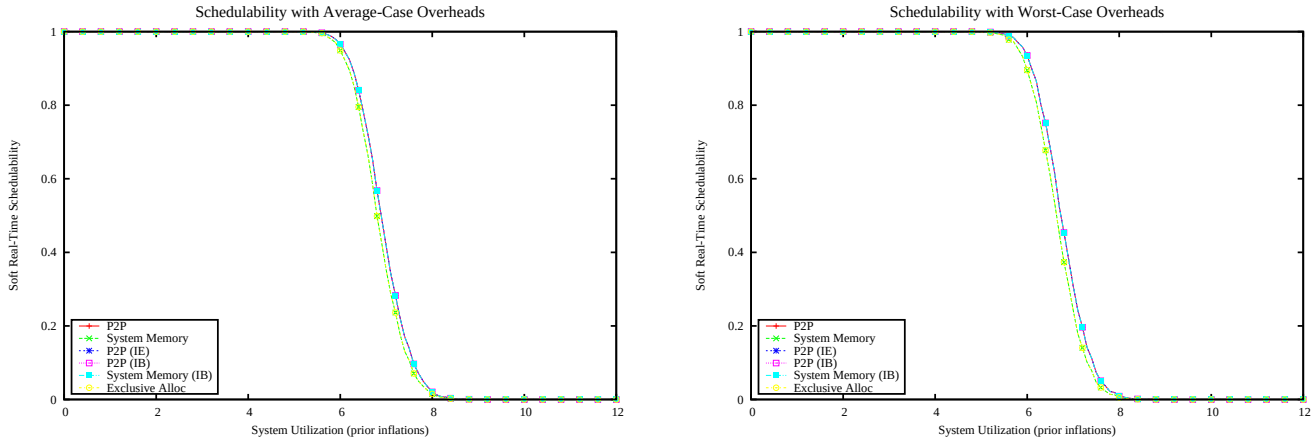

Figure 3999: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

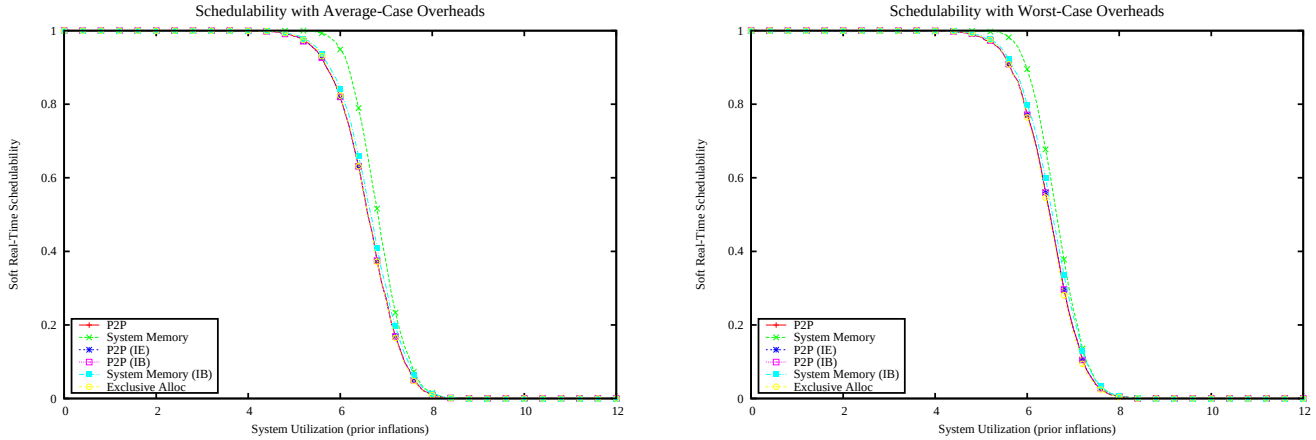

Figure 4000: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

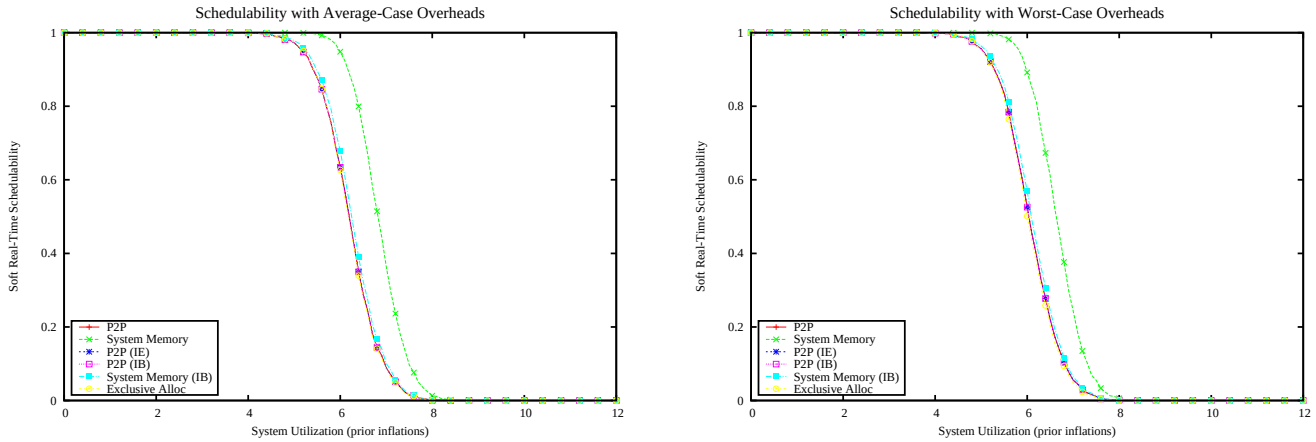

Figure 4001: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

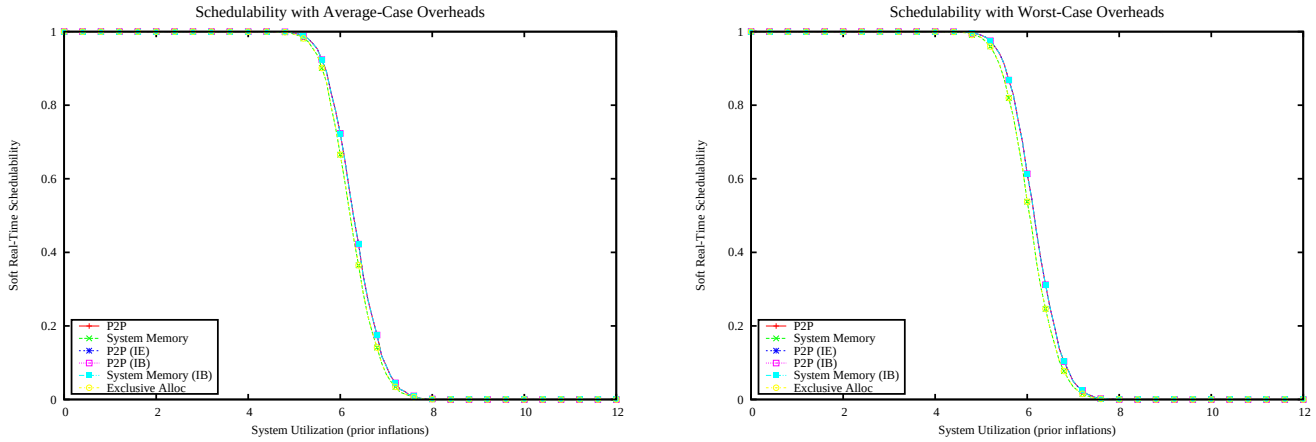

Figure 4002: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

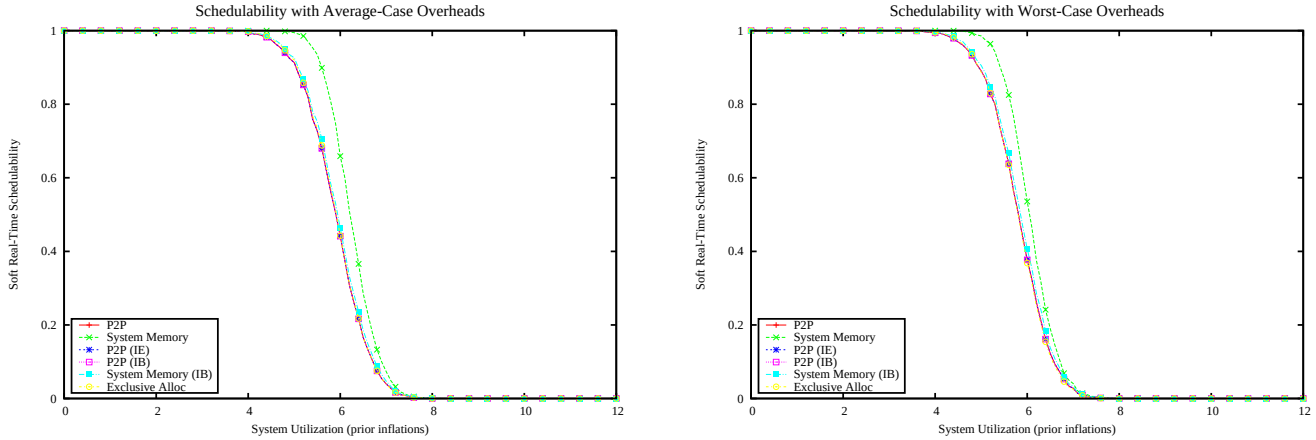

Figure 4003: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

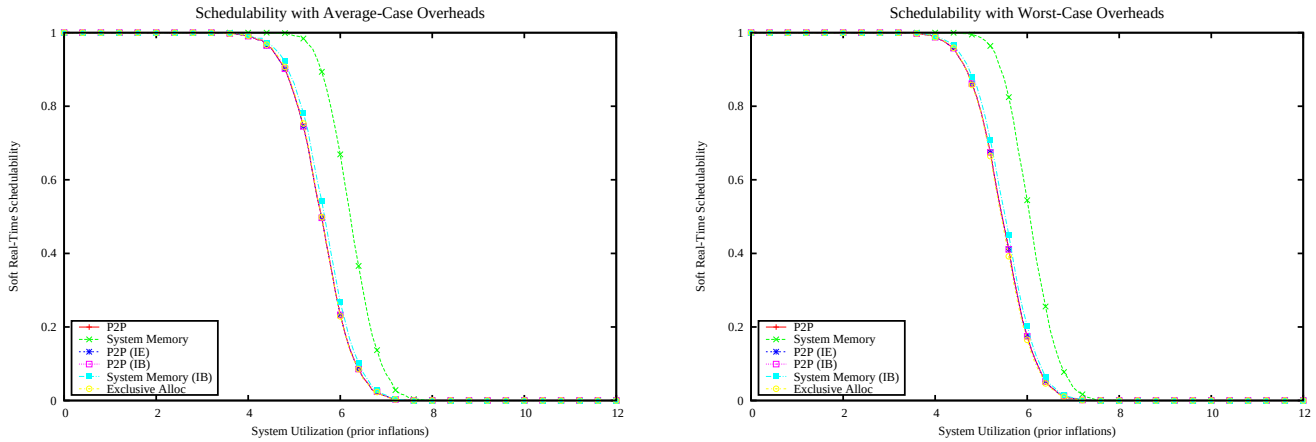

Figure 4004: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

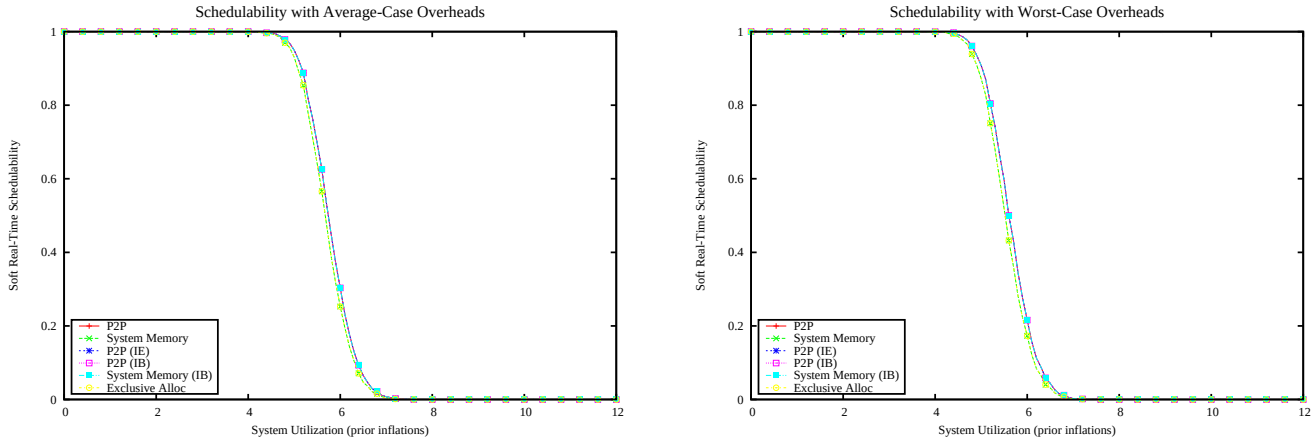

Figure 4005: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

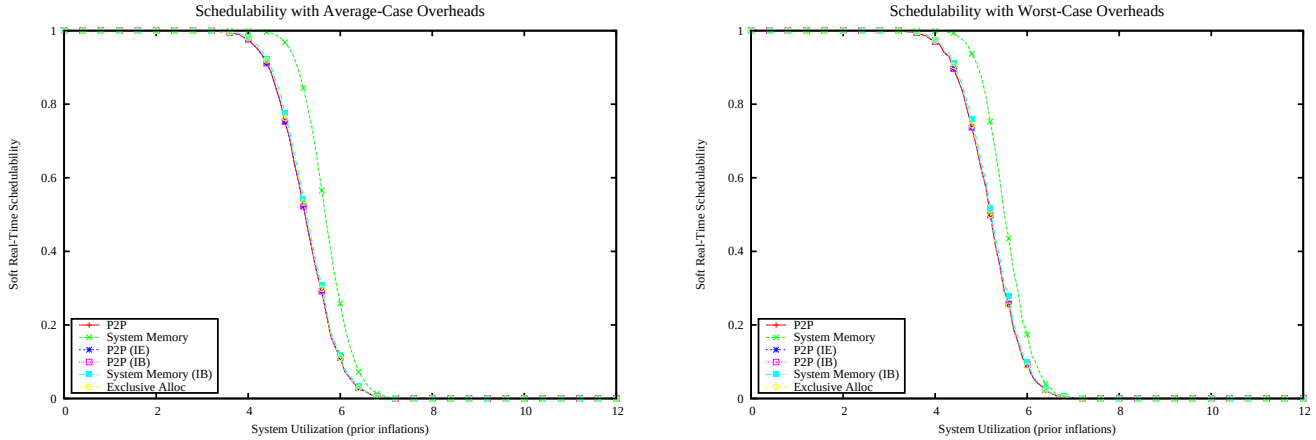

Figure 4006: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

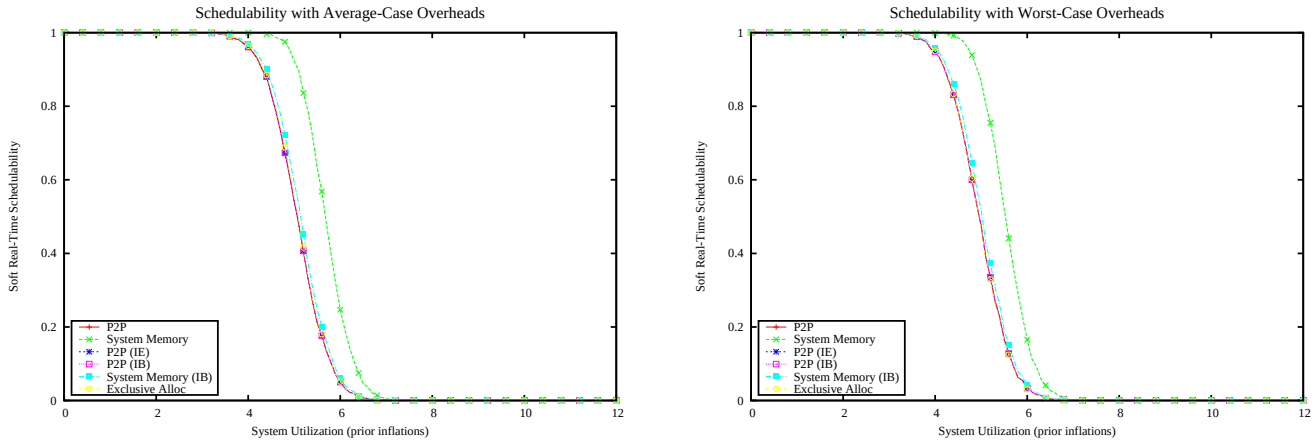

Figure 4007: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

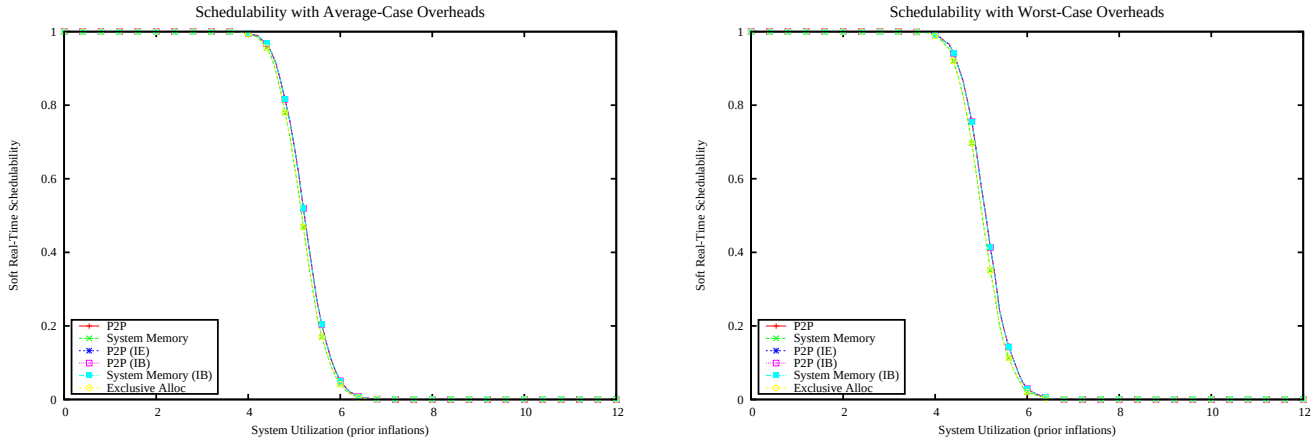

Figure 4008: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

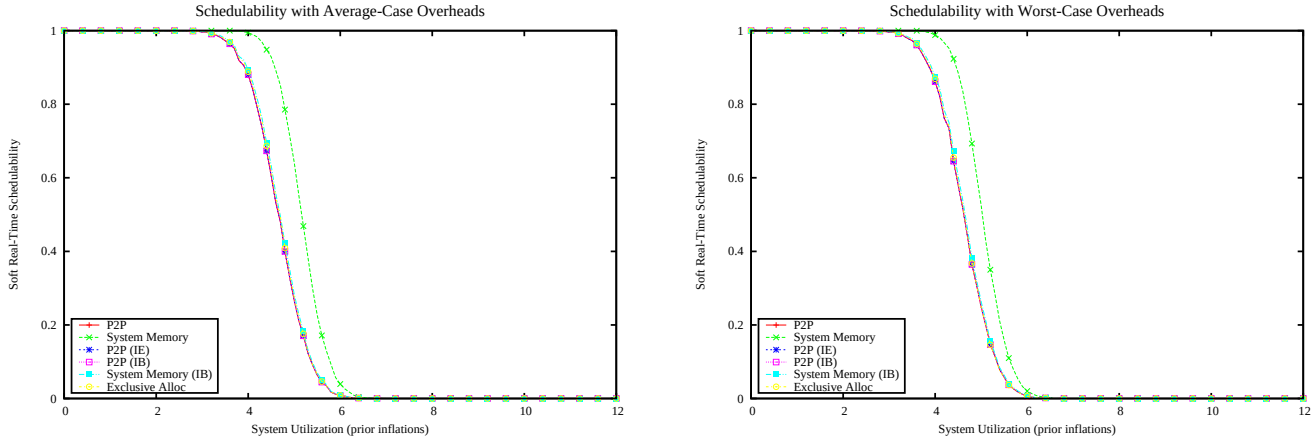

Figure 4009: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

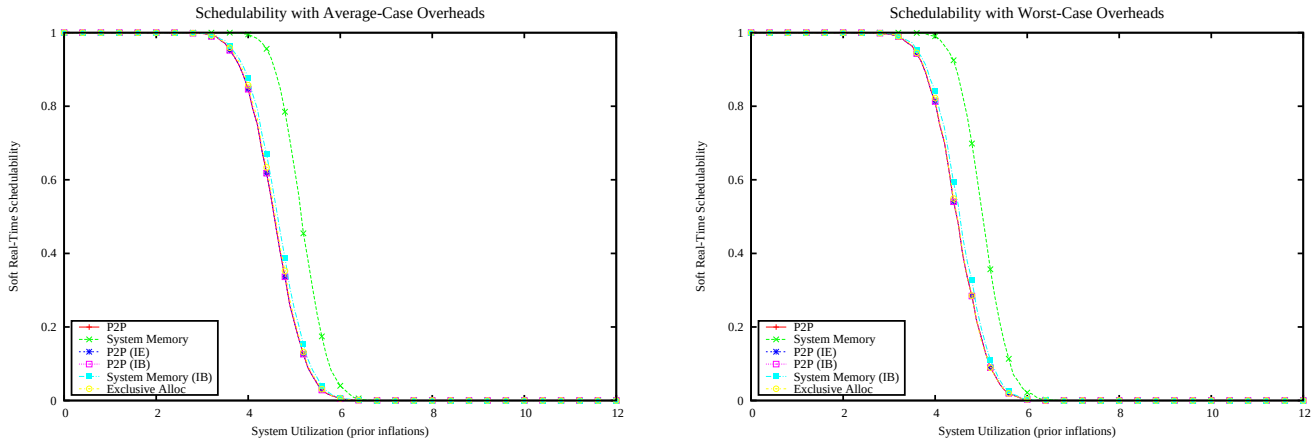

Figure 4010: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

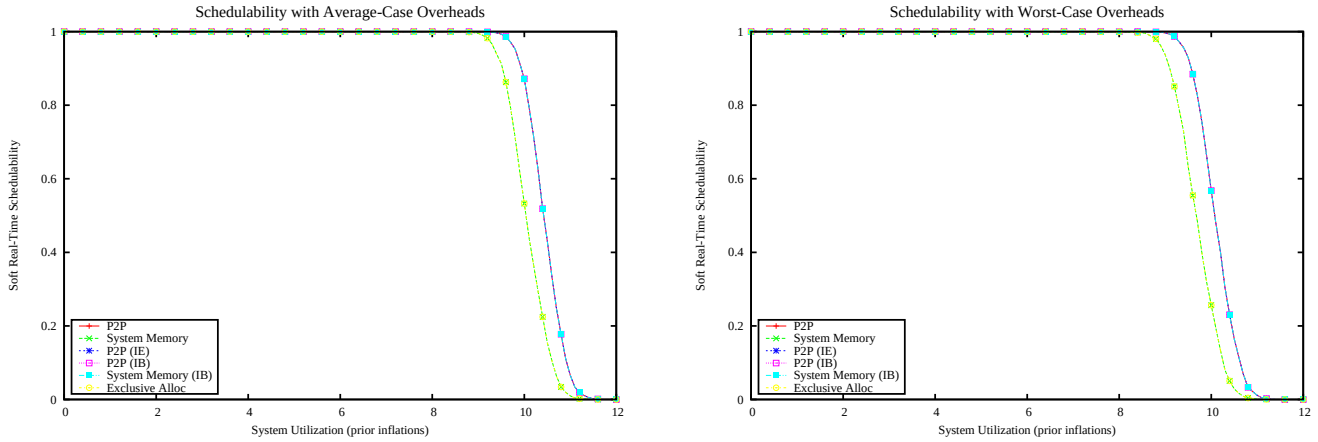

Figure 4011: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

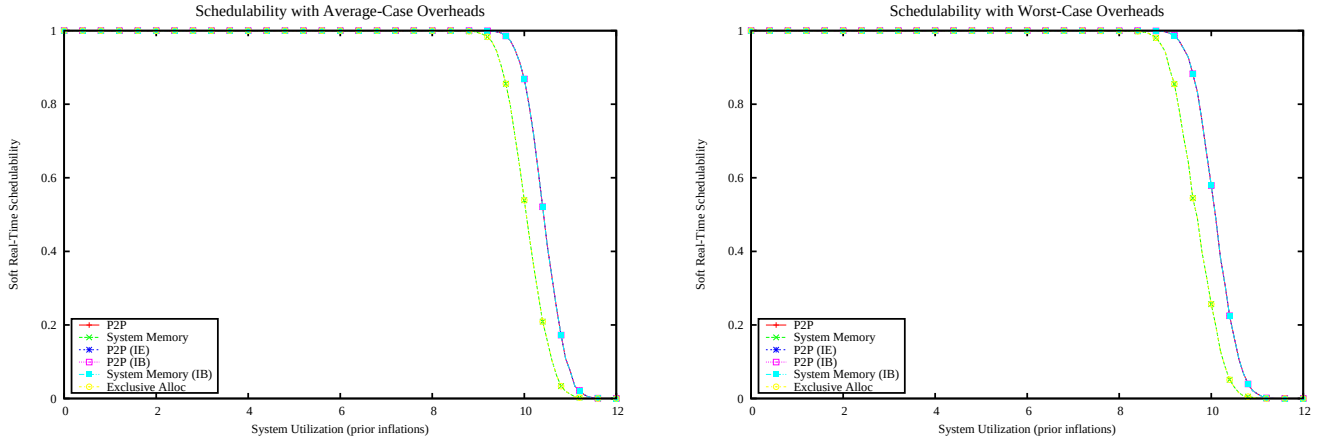

Figure 4012: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

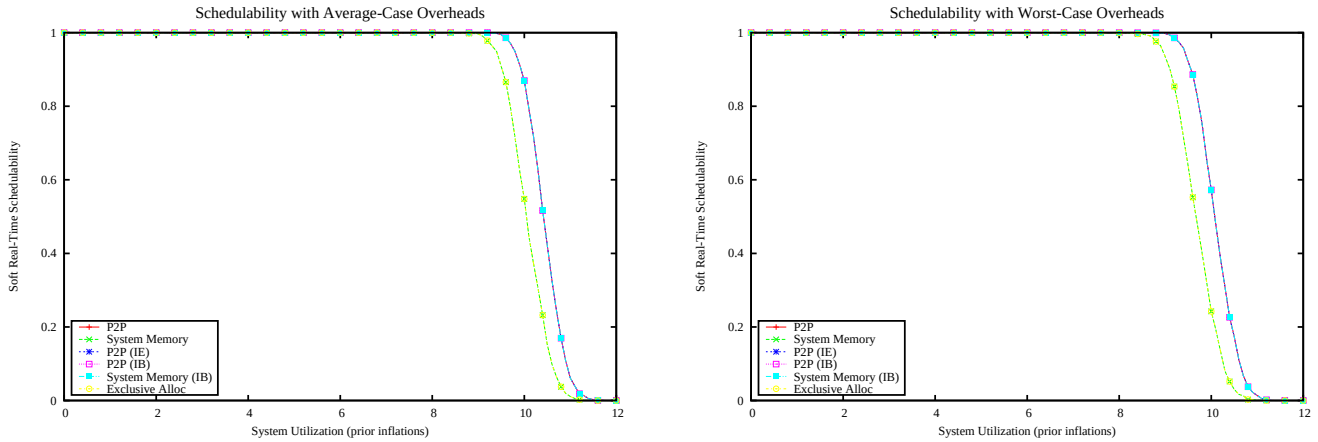

Figure 4013: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

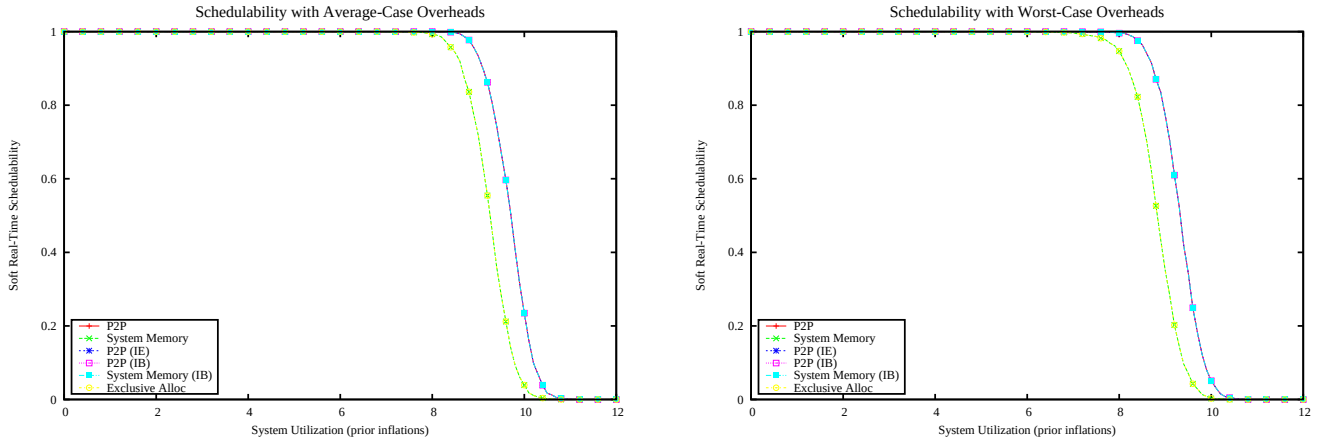

Figure 4014: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

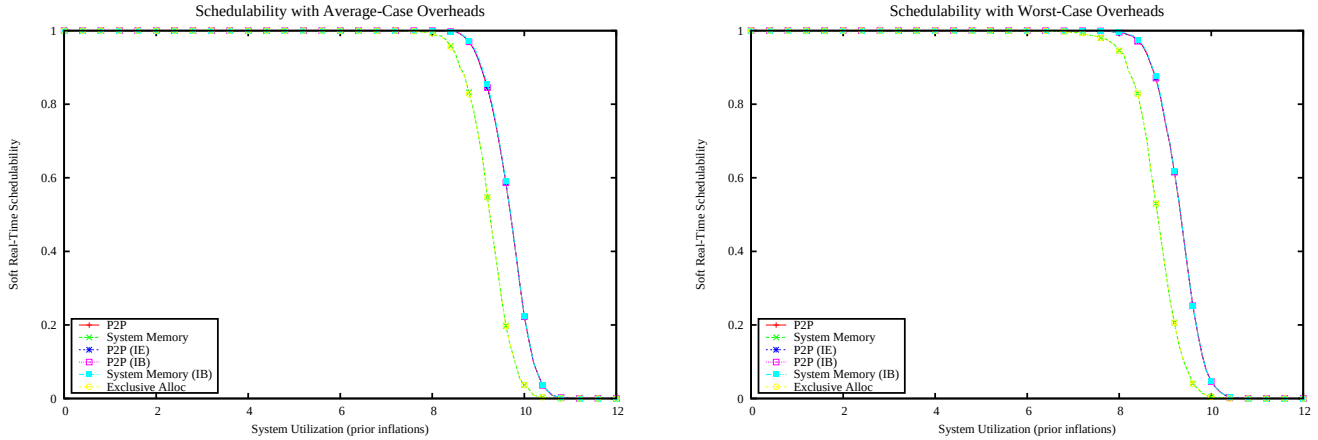

Figure 4015: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

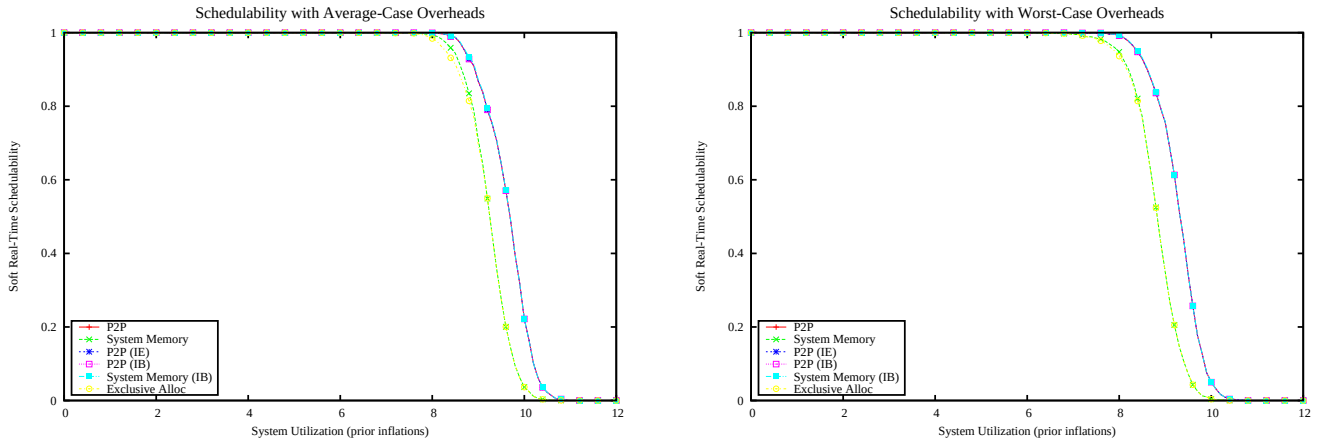

Figure 4016: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

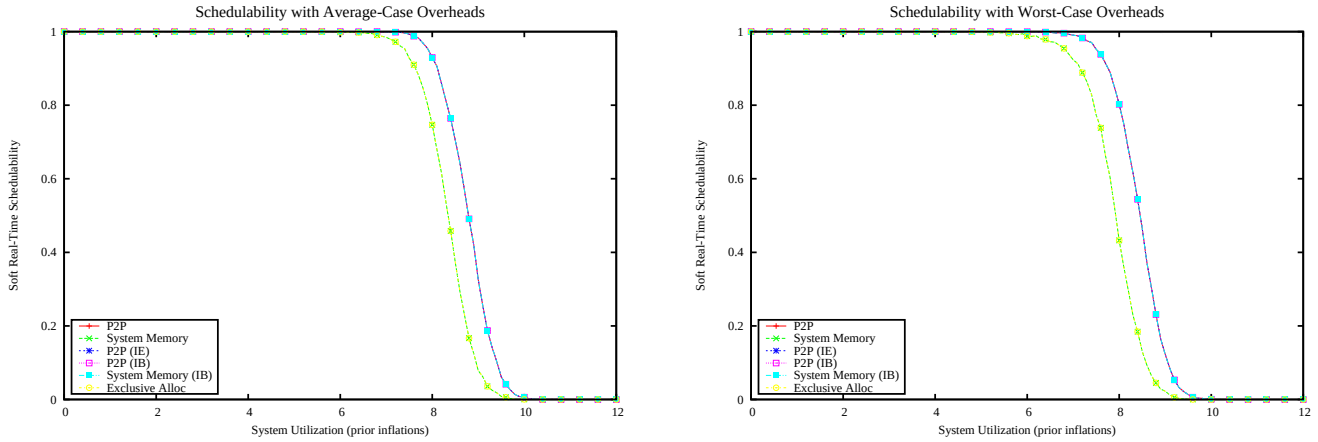

Figure 4017: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

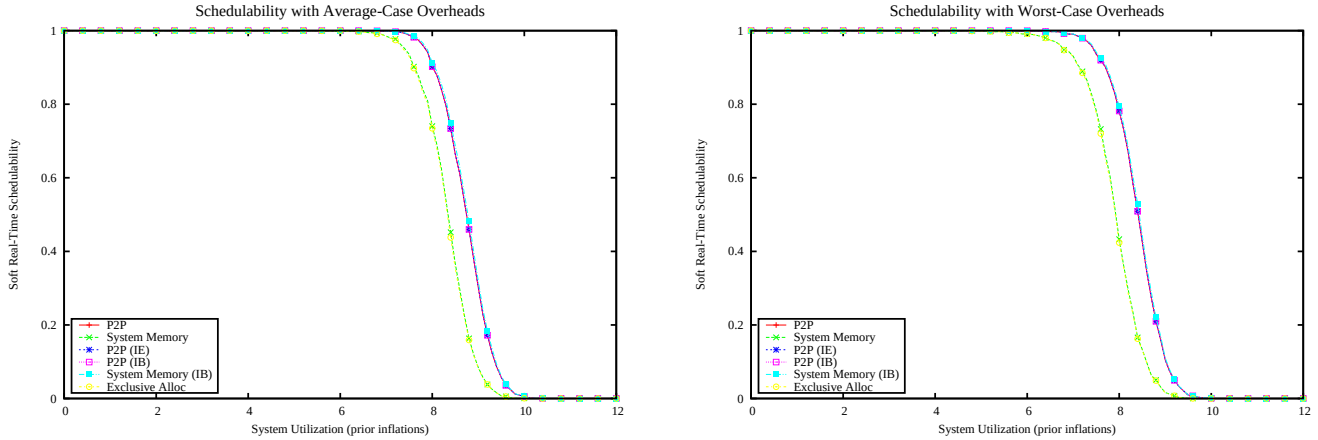

Figure 4018: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

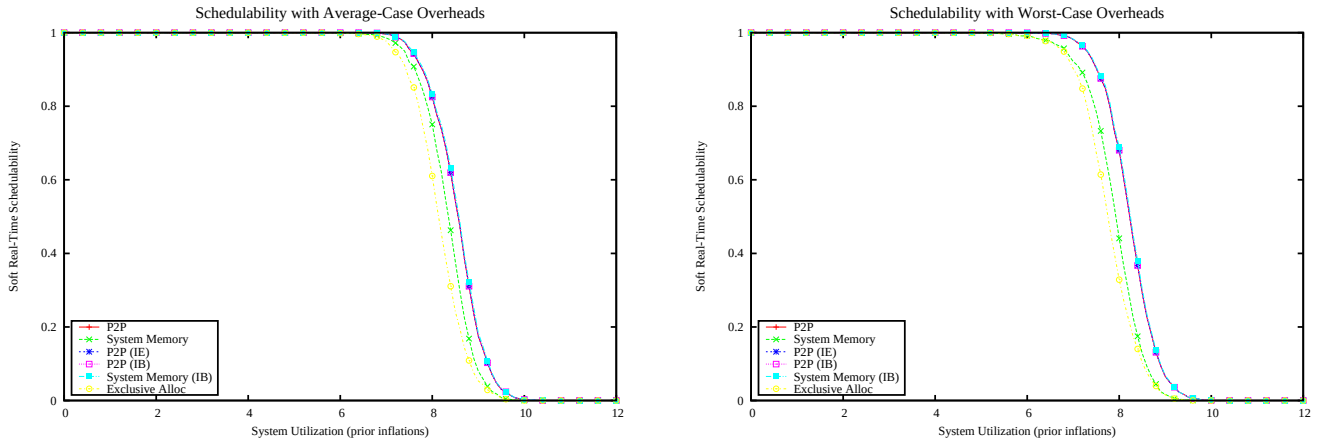

Figure 4019: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

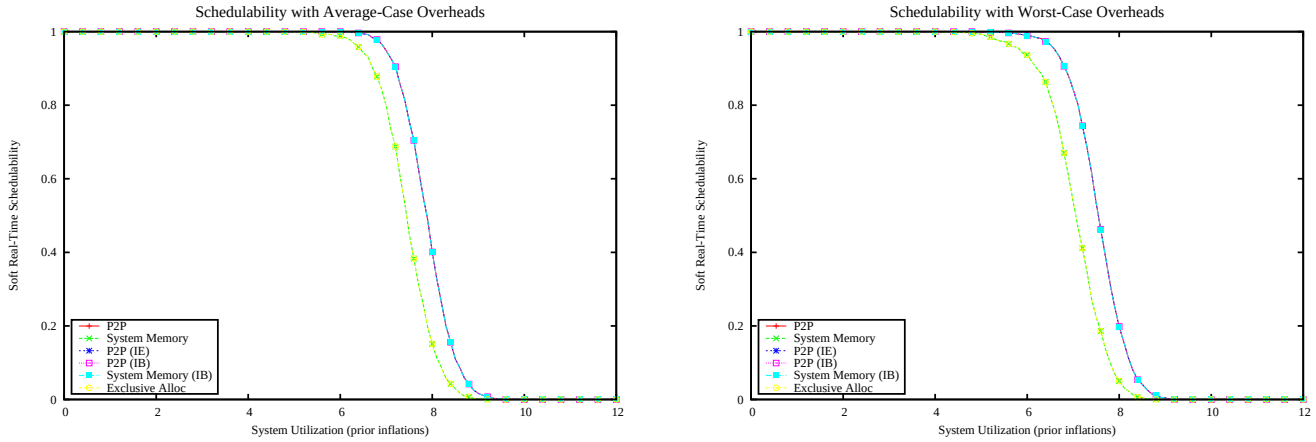

Figure 4020: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

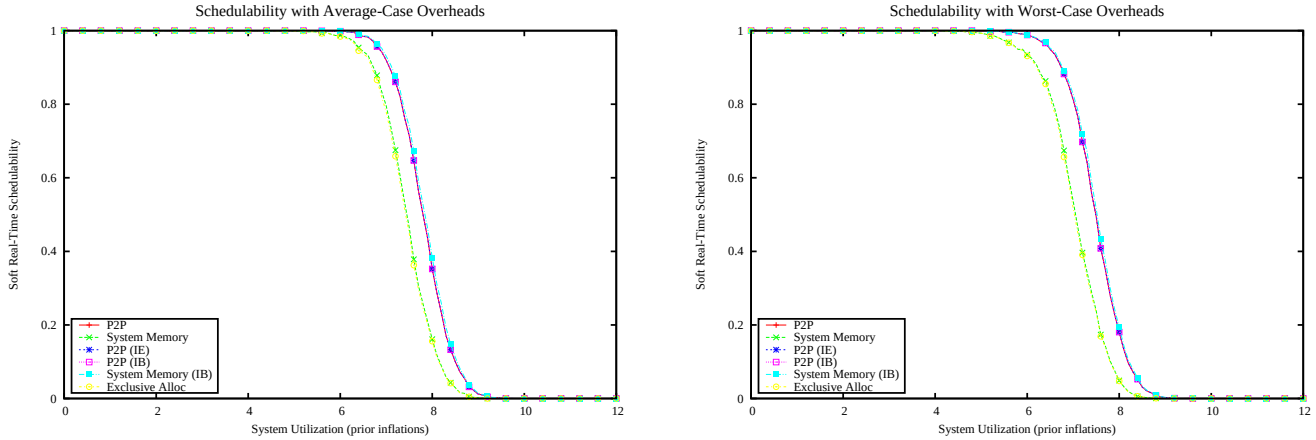

Figure 4021: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

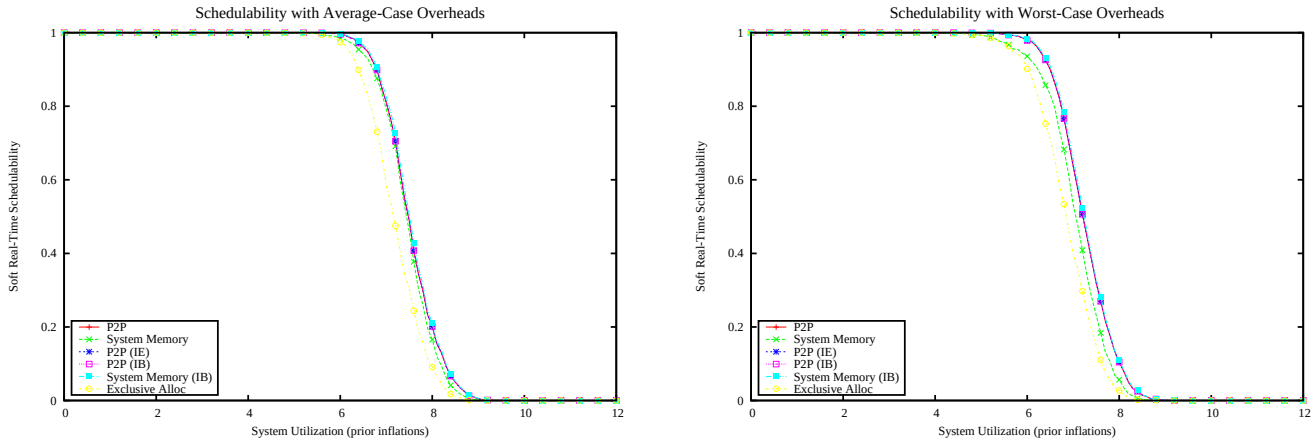

Figure 4022: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

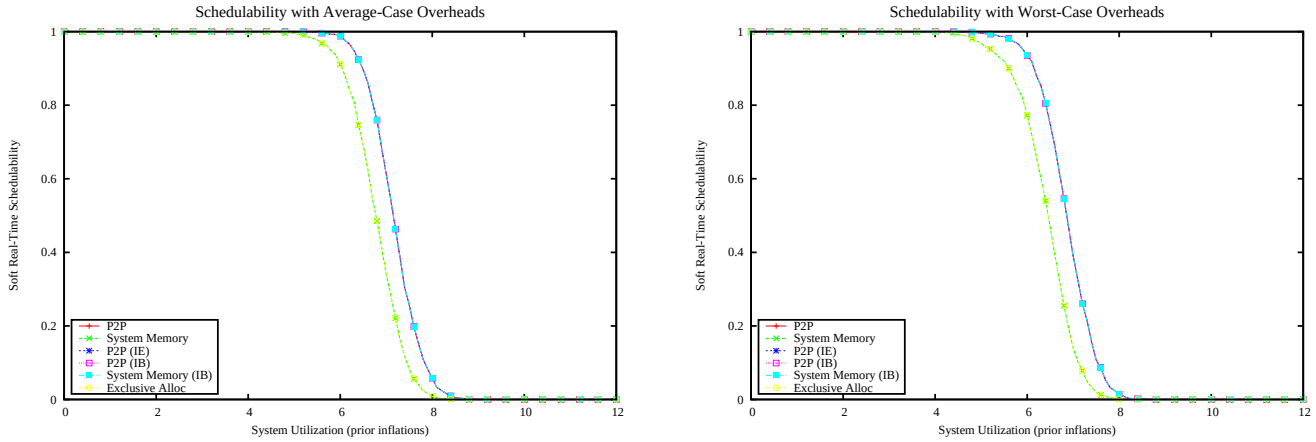

Figure 4023: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

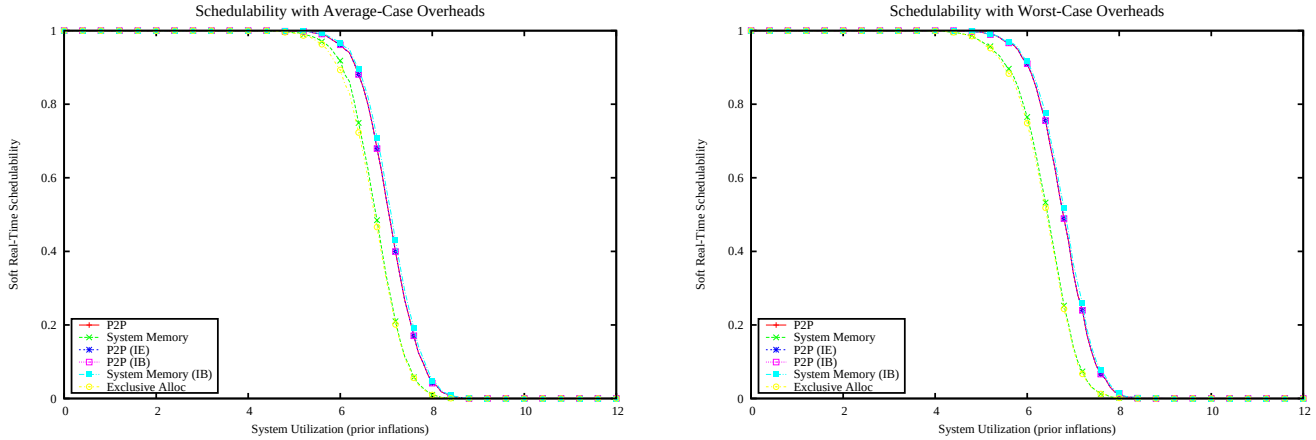

Figure 4024: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

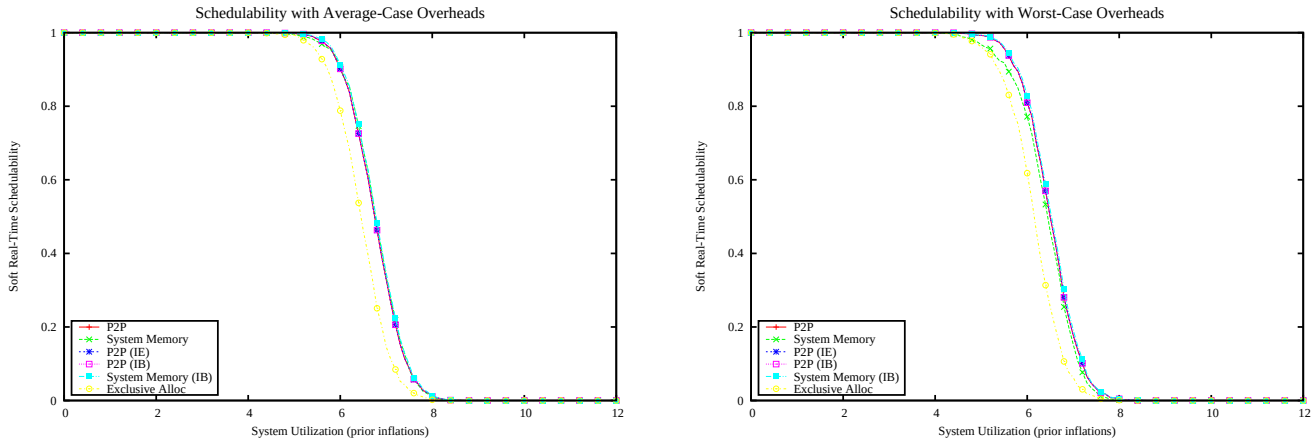

Figure 4025: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

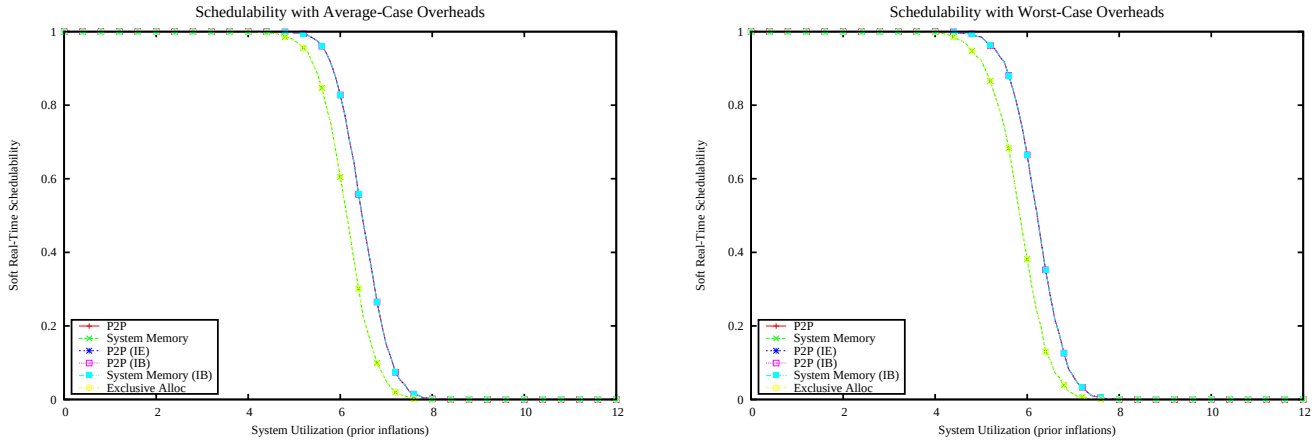

Figure 4026: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

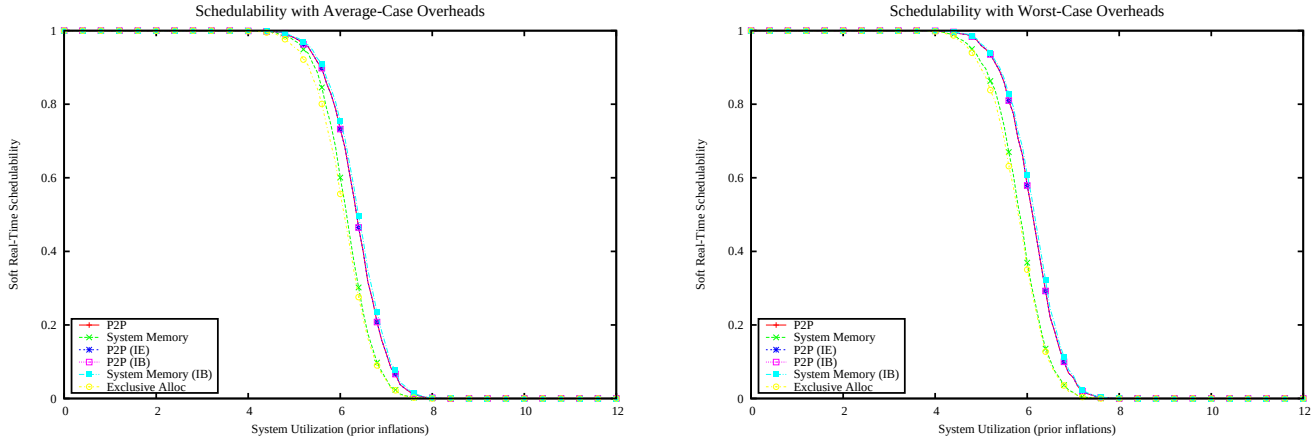

Figure 4027: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

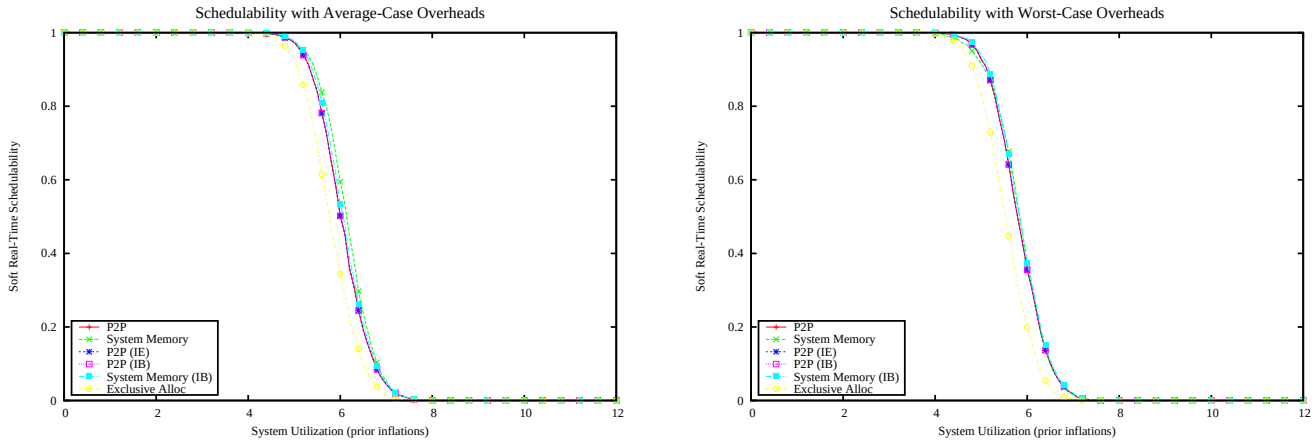

Figure 4028: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

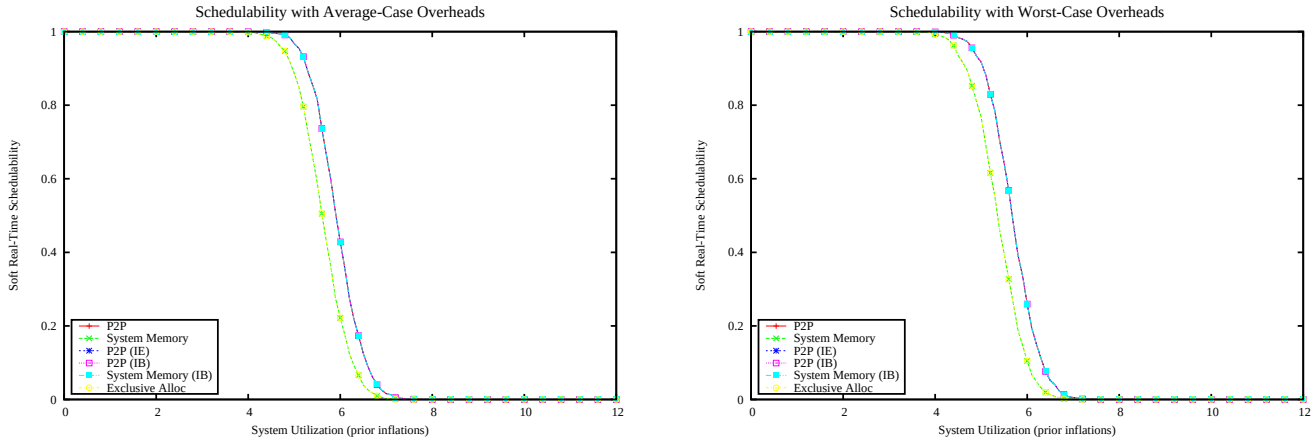

Figure 4029: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

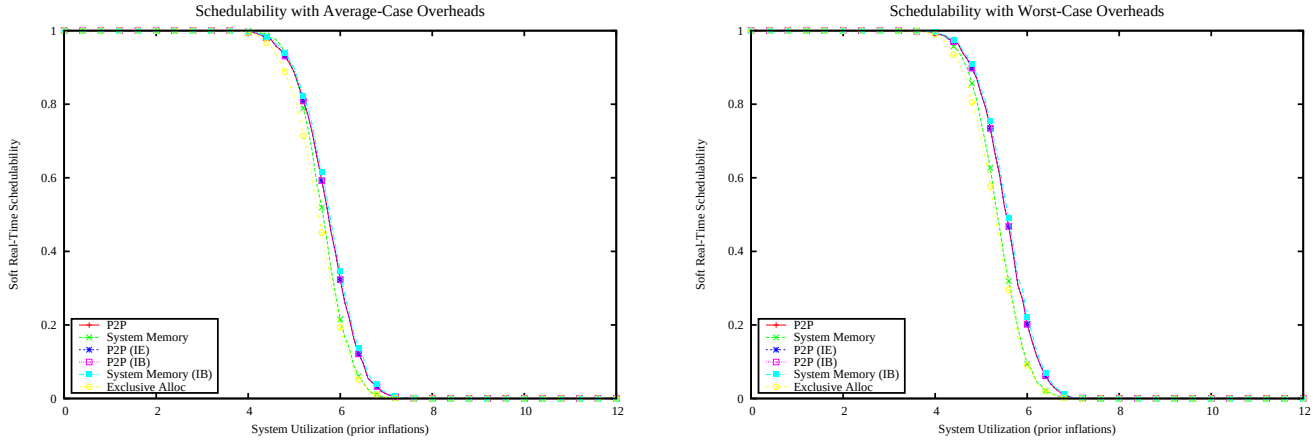

Figure 4030: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

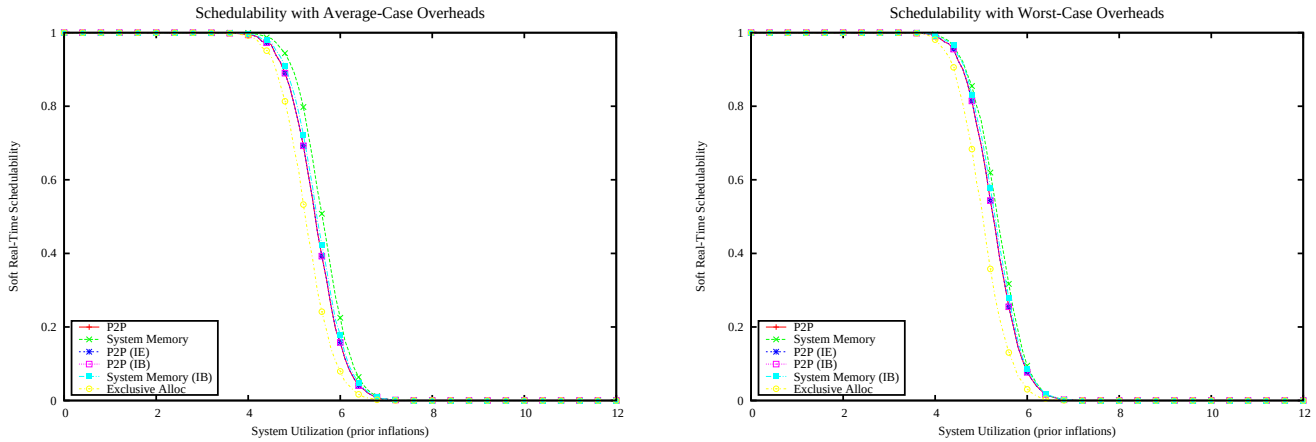

Figure 4031: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

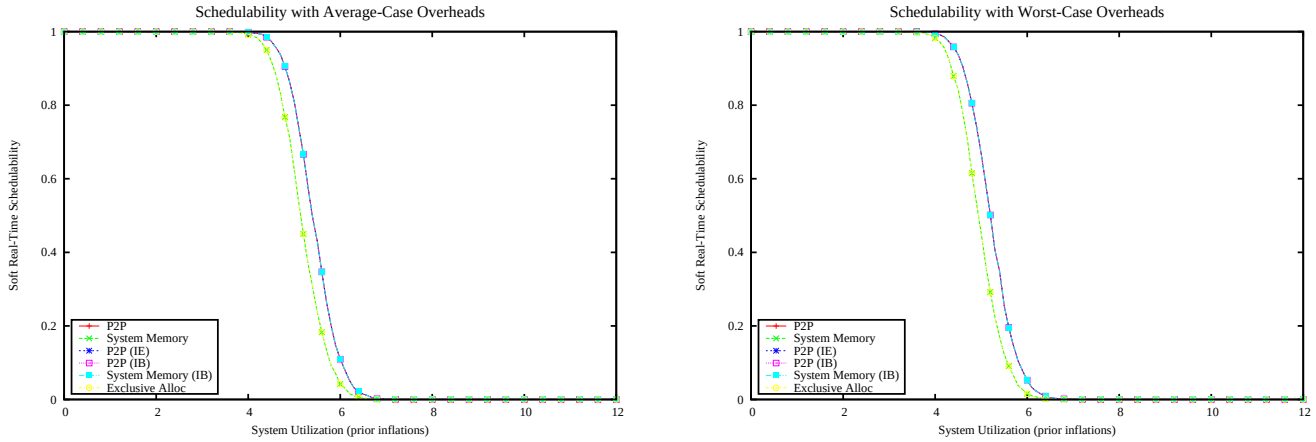

Figure 4032: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

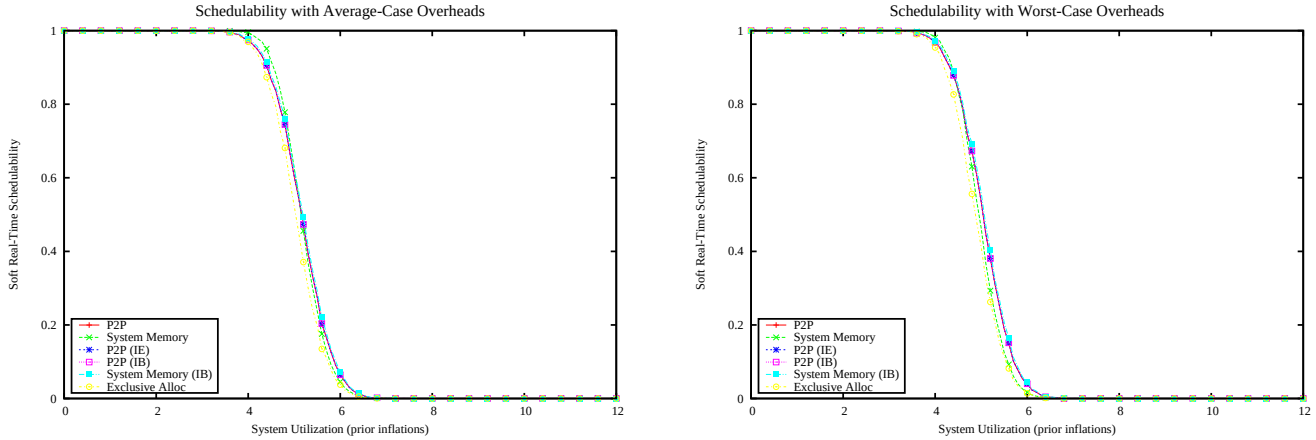

Figure 4033: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

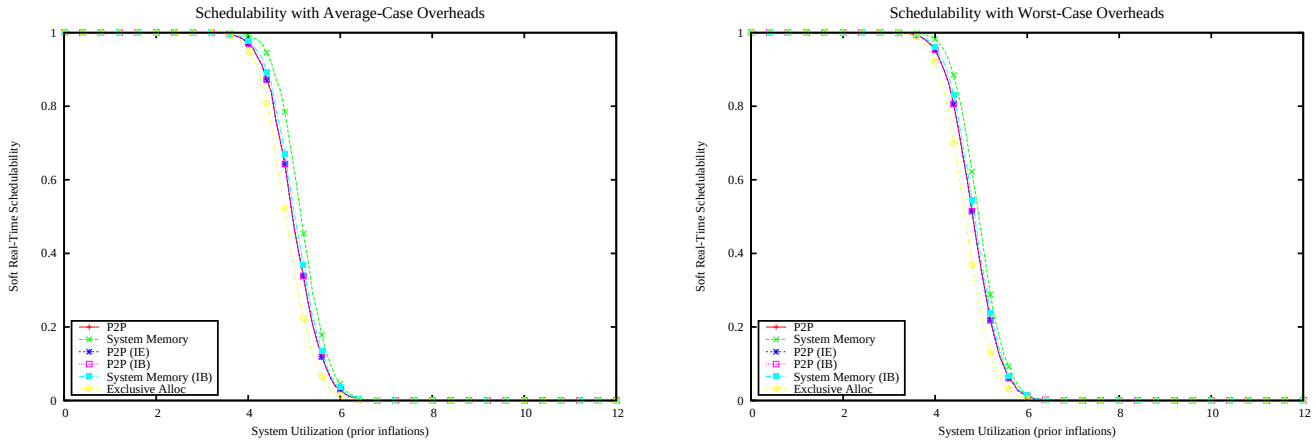

Figure 4034: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

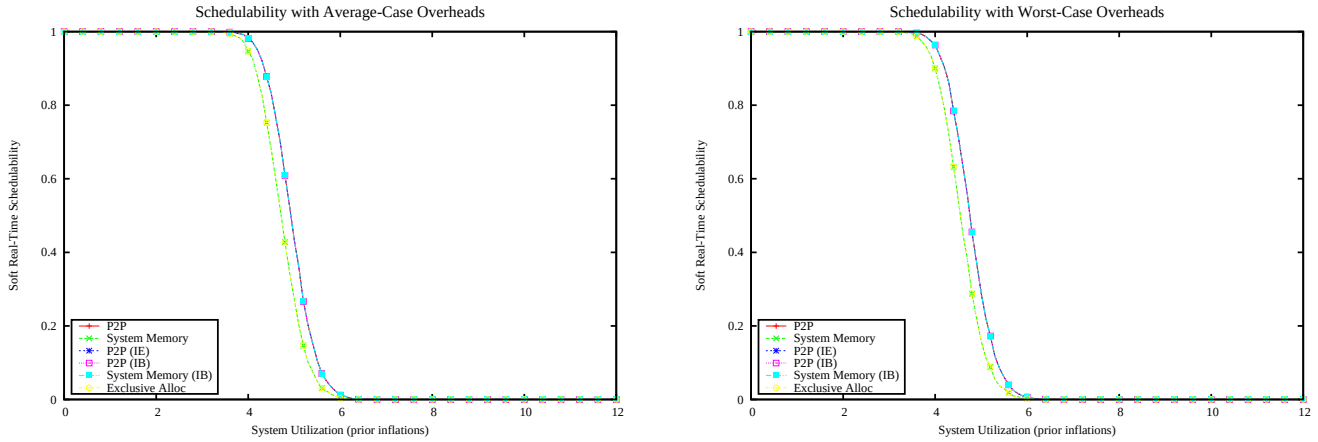

Figure 4035: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

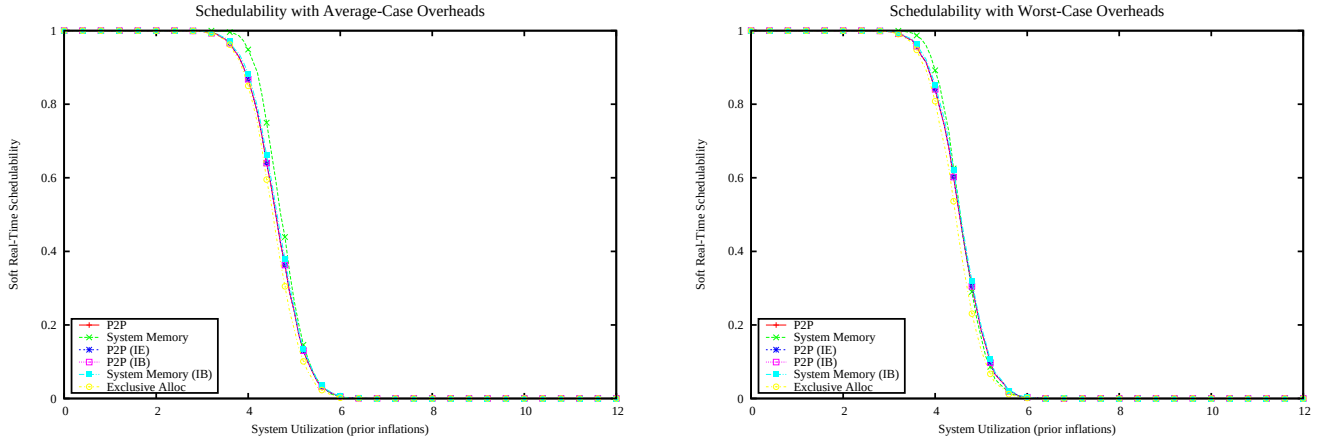

Figure 4036: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

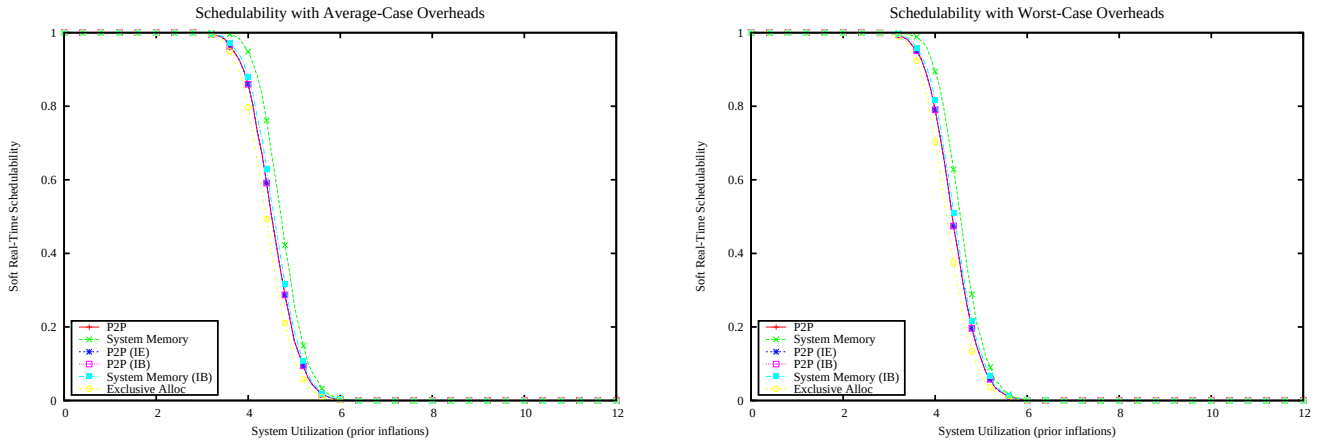

Figure 4037: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

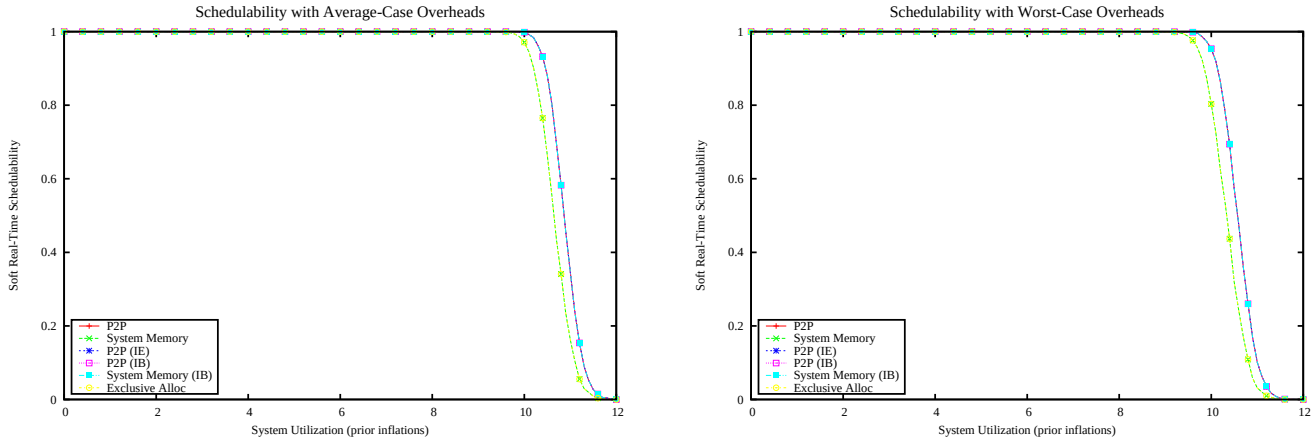

Figure 4038: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

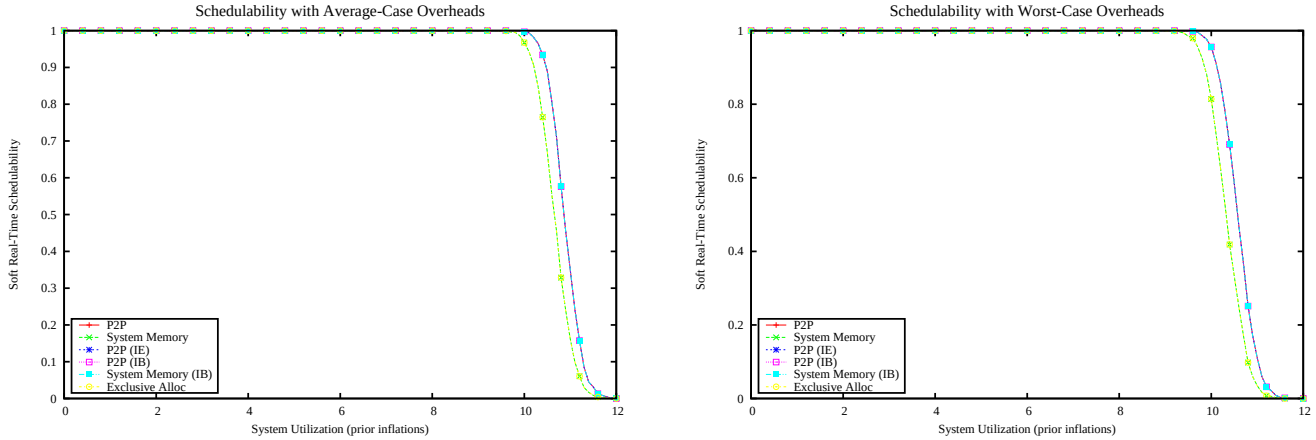

Figure 4039: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

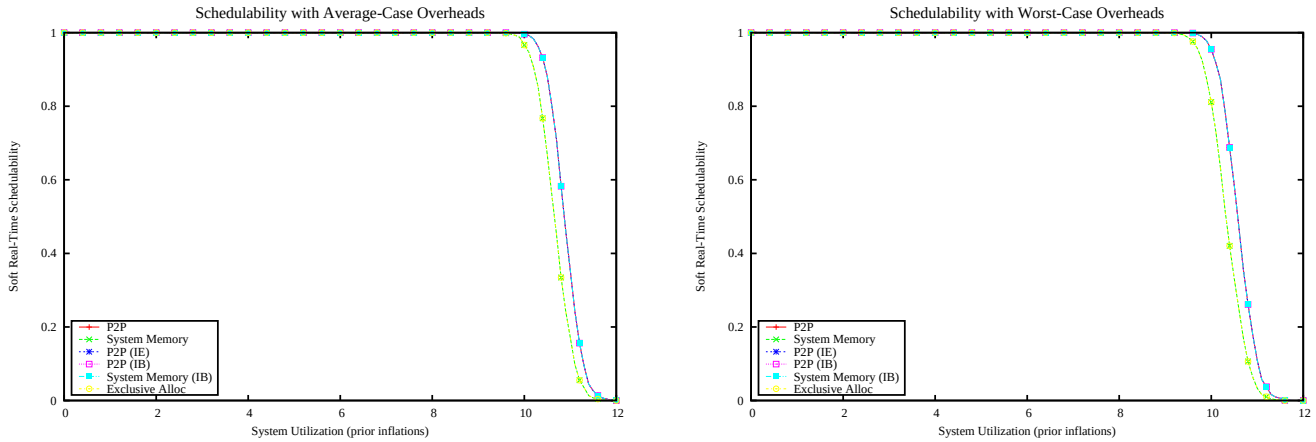

Figure 4040: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

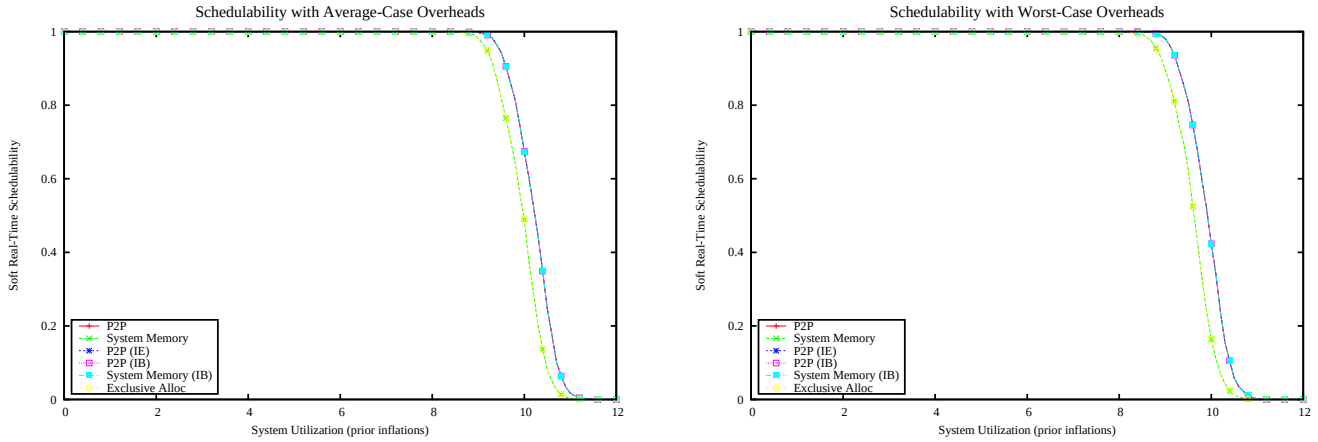

Figure 4041: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

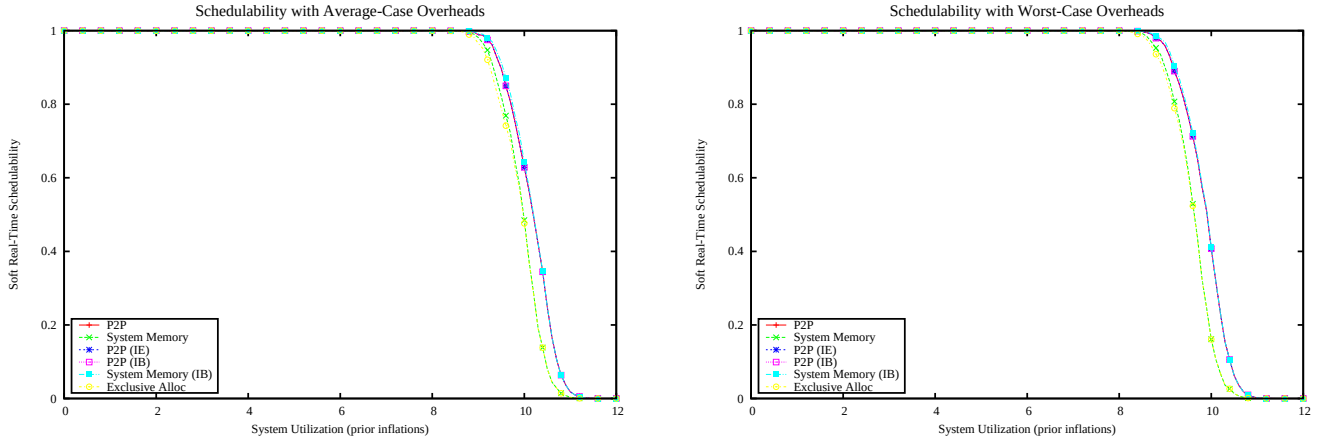

Figure 4042: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

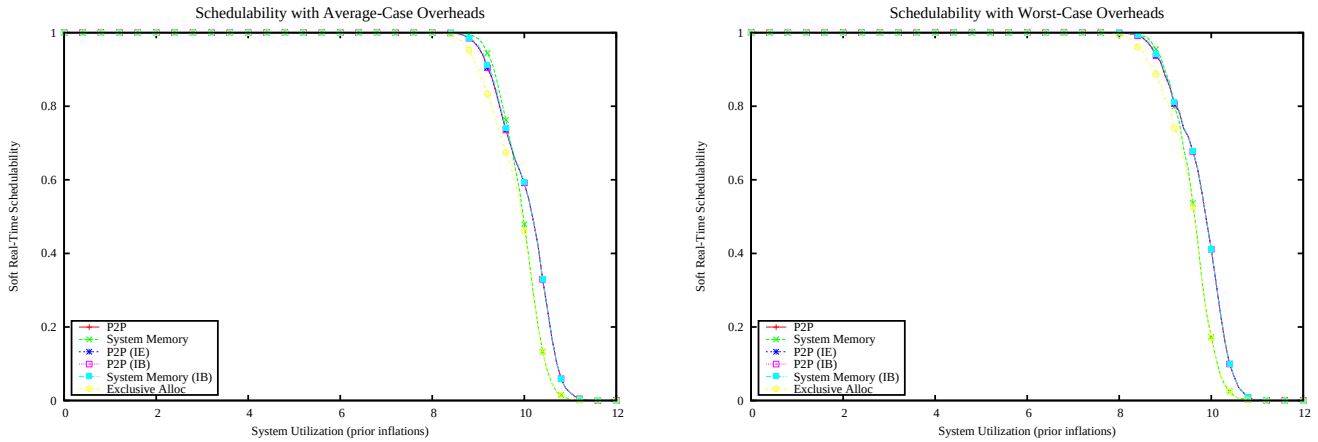

Figure 4043: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

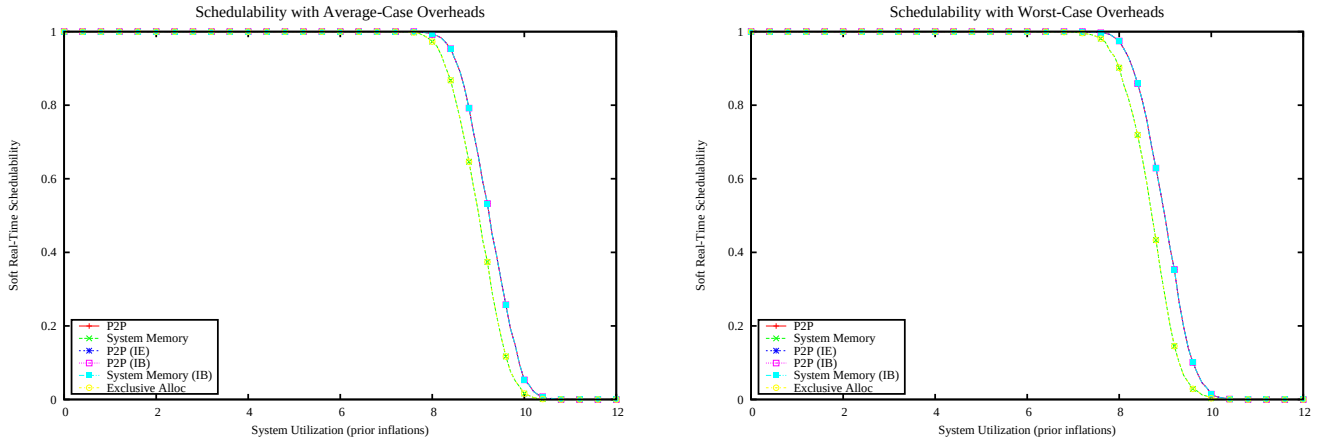

Figure 4044: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

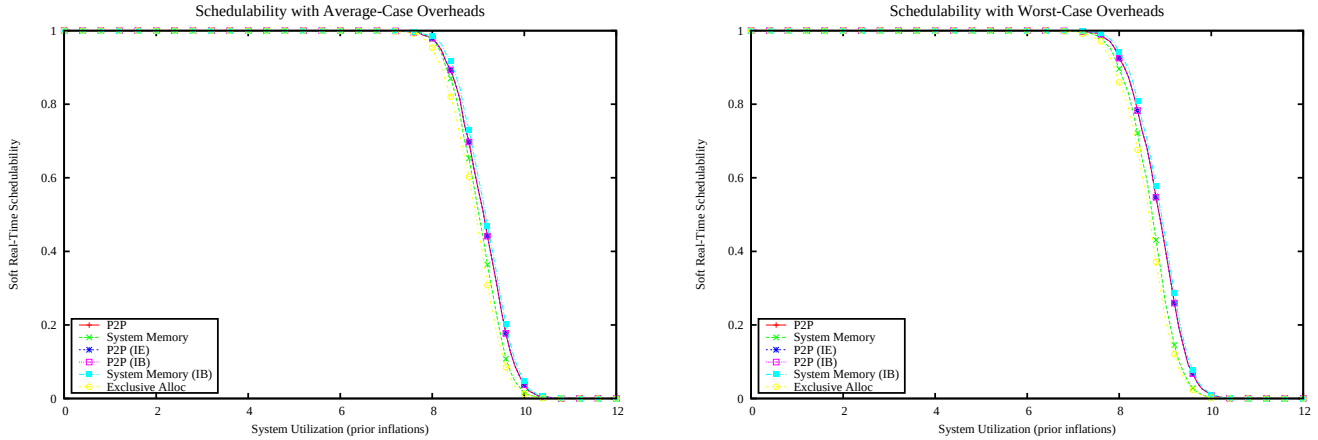

Figure 4045: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

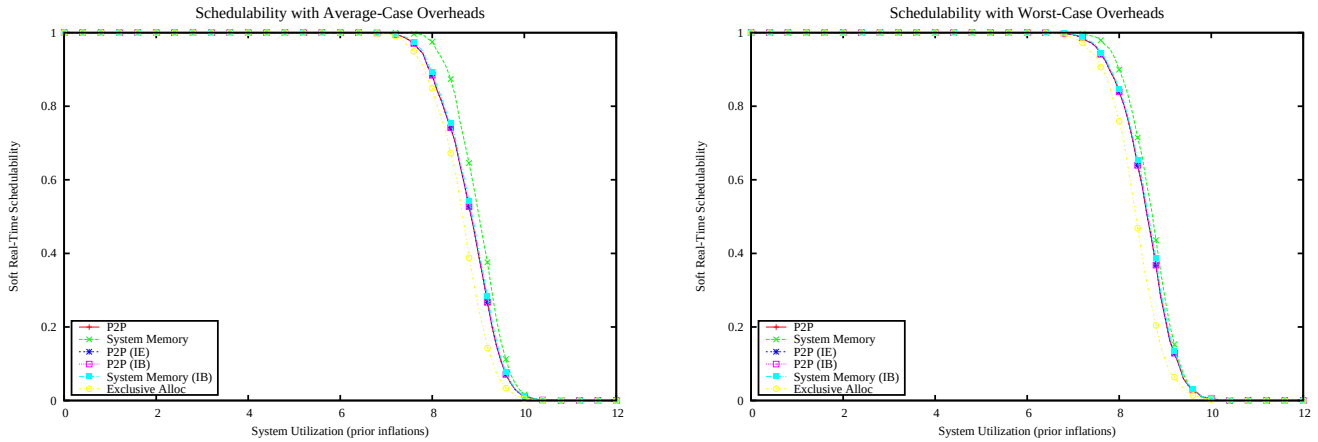

Figure 4046: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

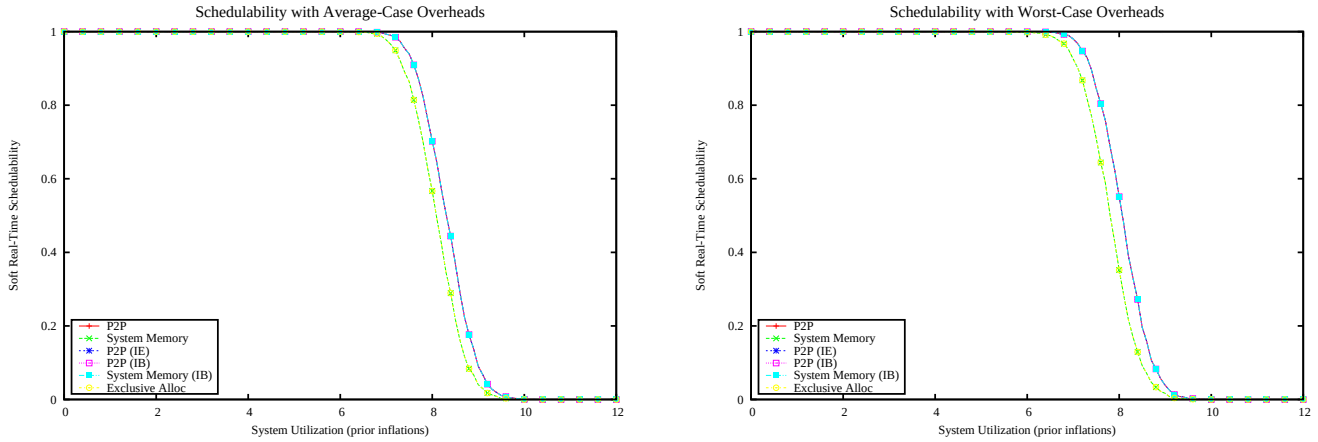

Figure 4047: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

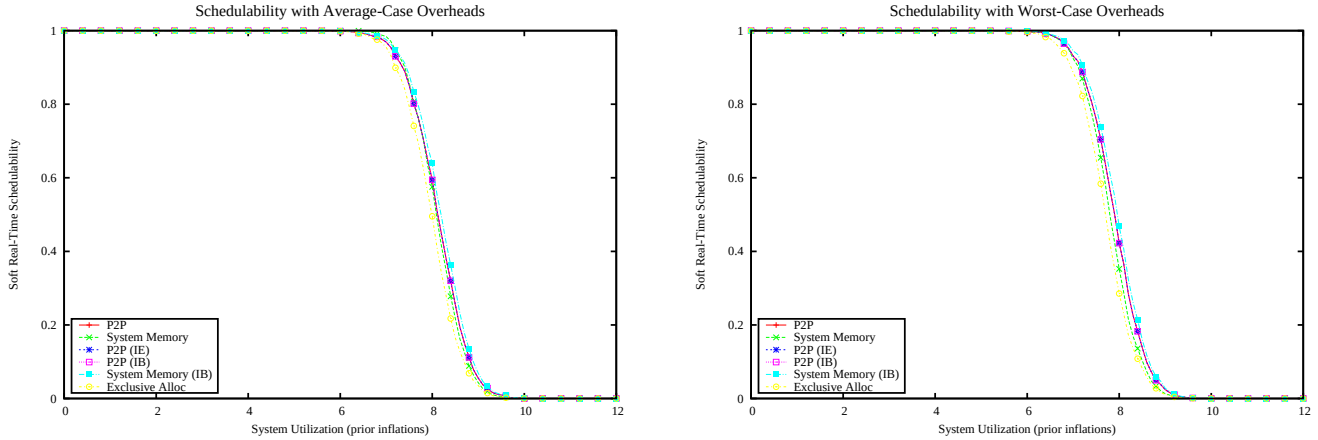

Figure 4048: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

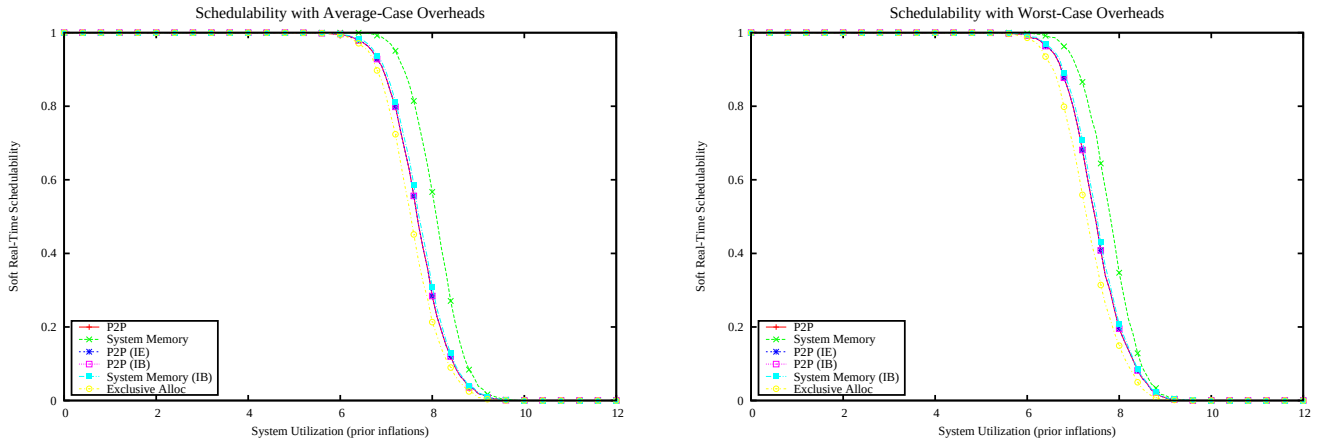

Figure 4049: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

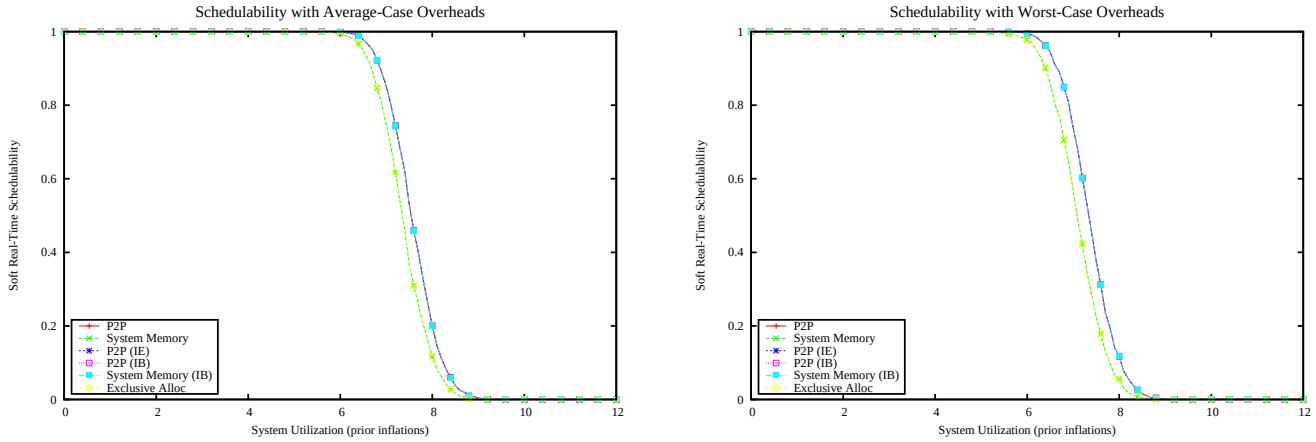

Figure 4050: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

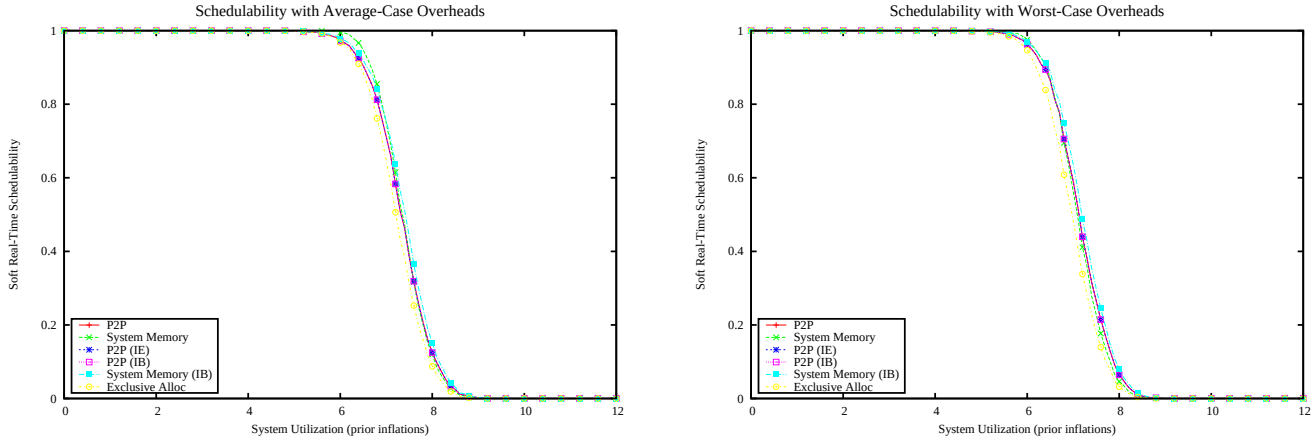

Figure 4051: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

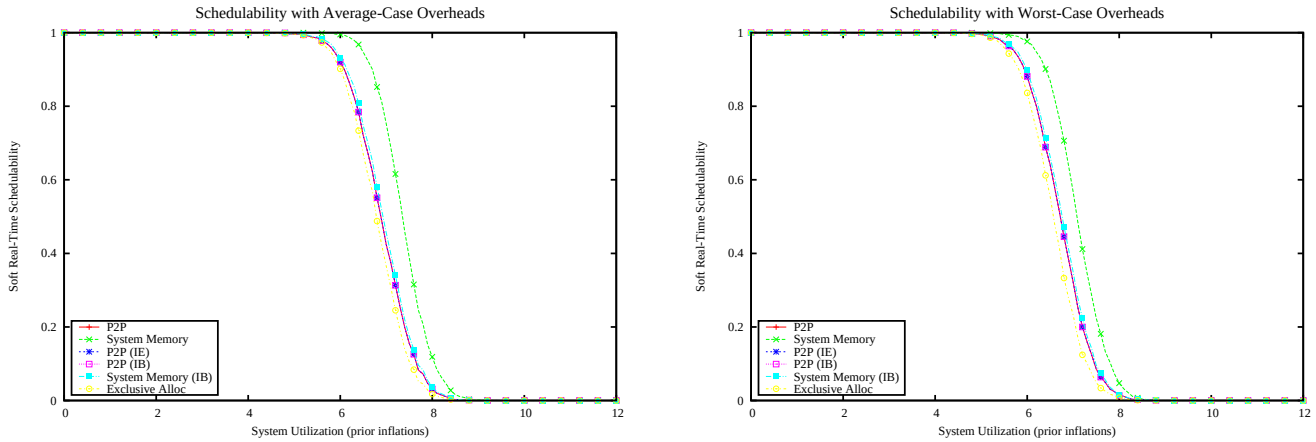

Figure 4052: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

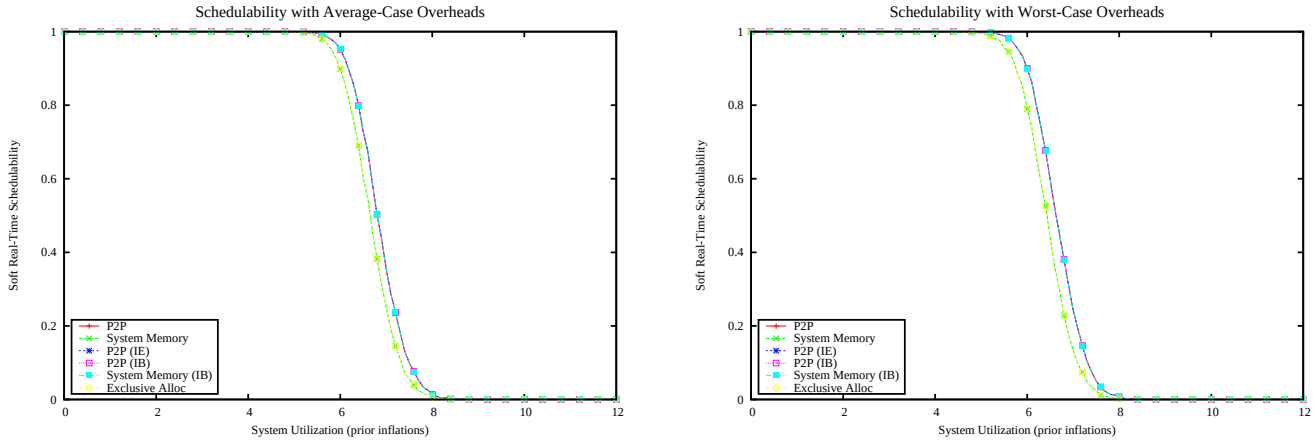

Figure 4053: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

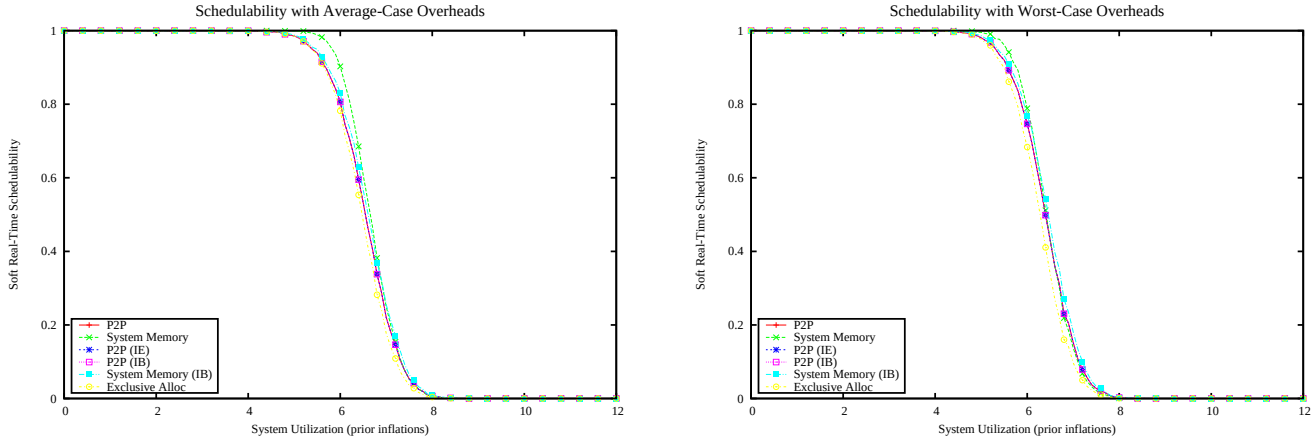

Figure 4054: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

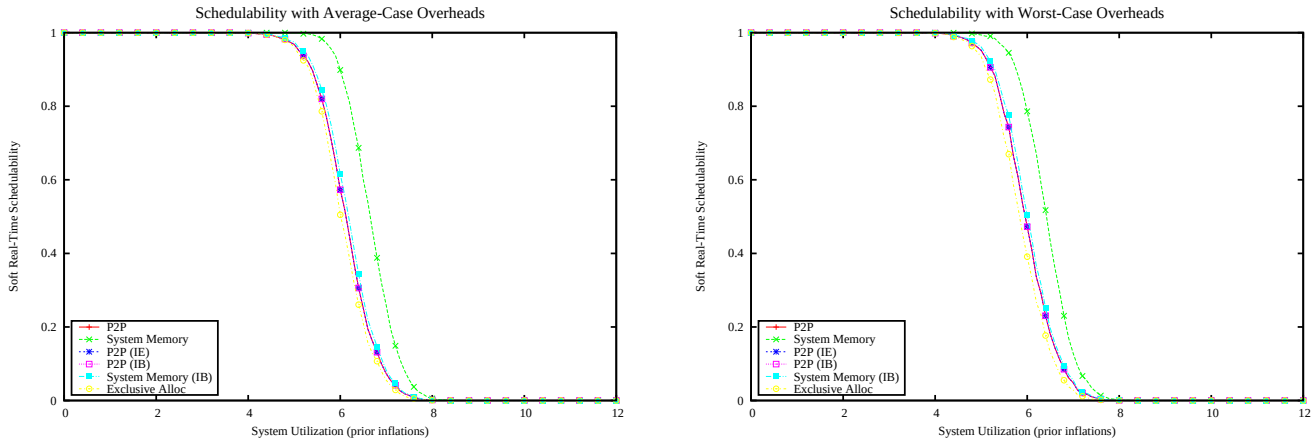

Figure 4055: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

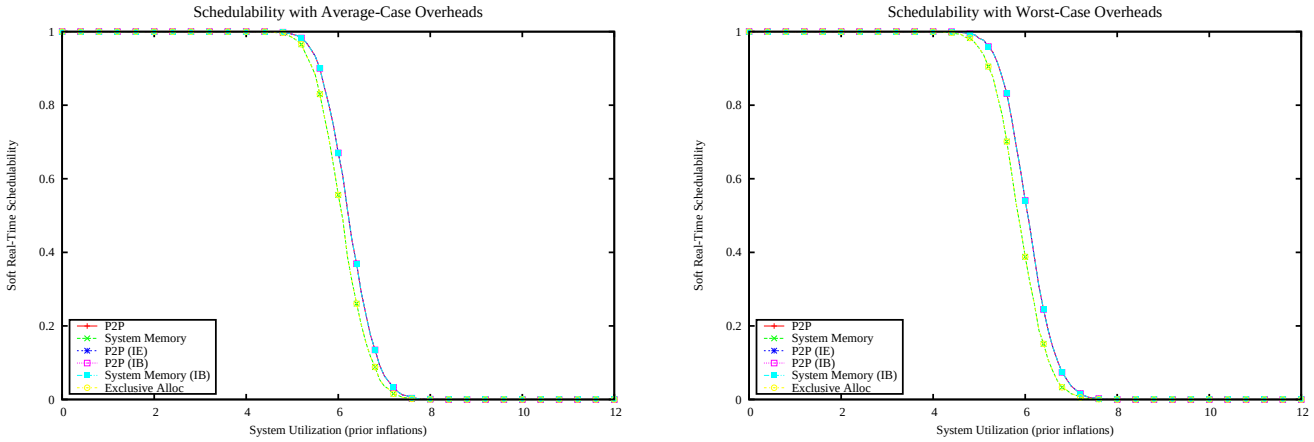

Figure 4056: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

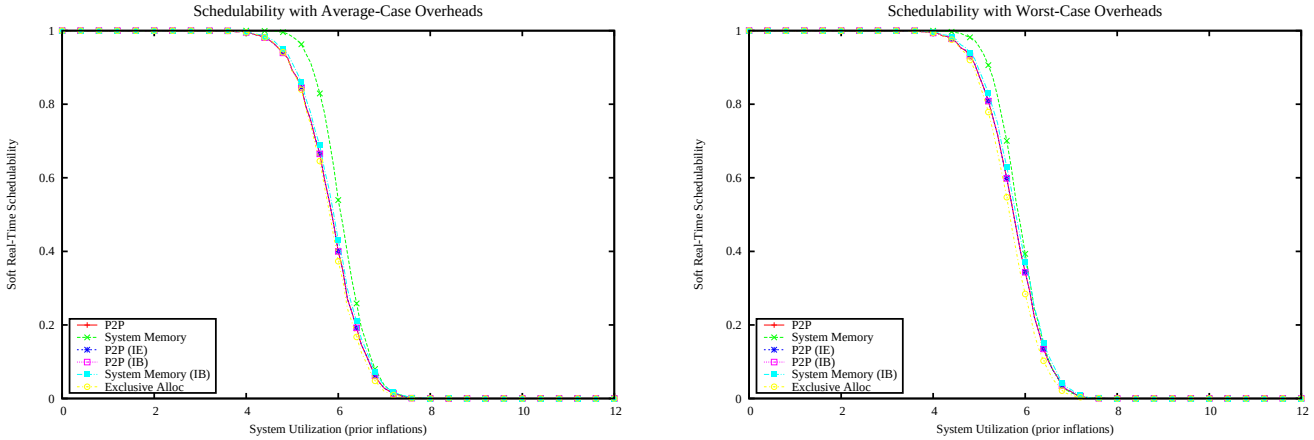

Figure 4057: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

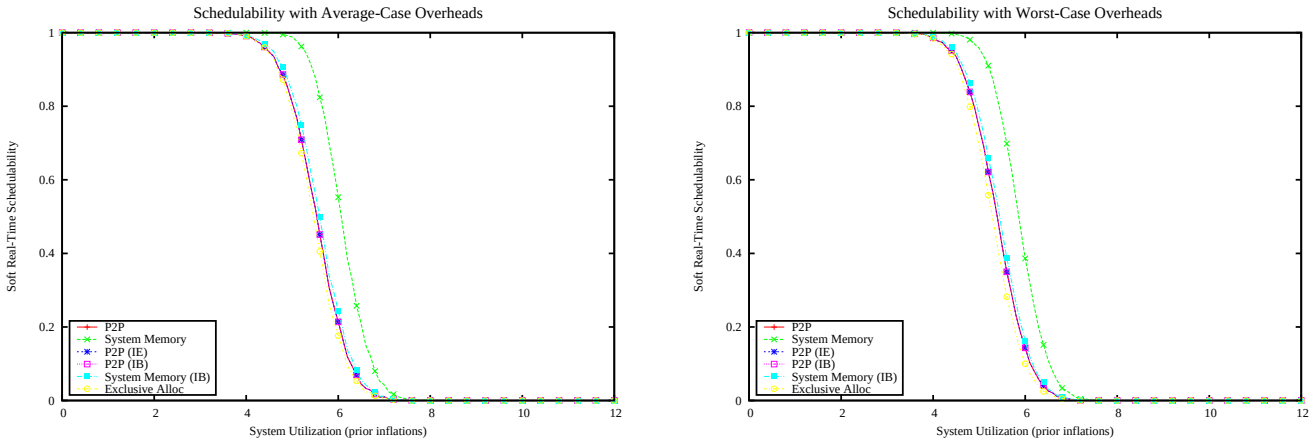

Figure 4058: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

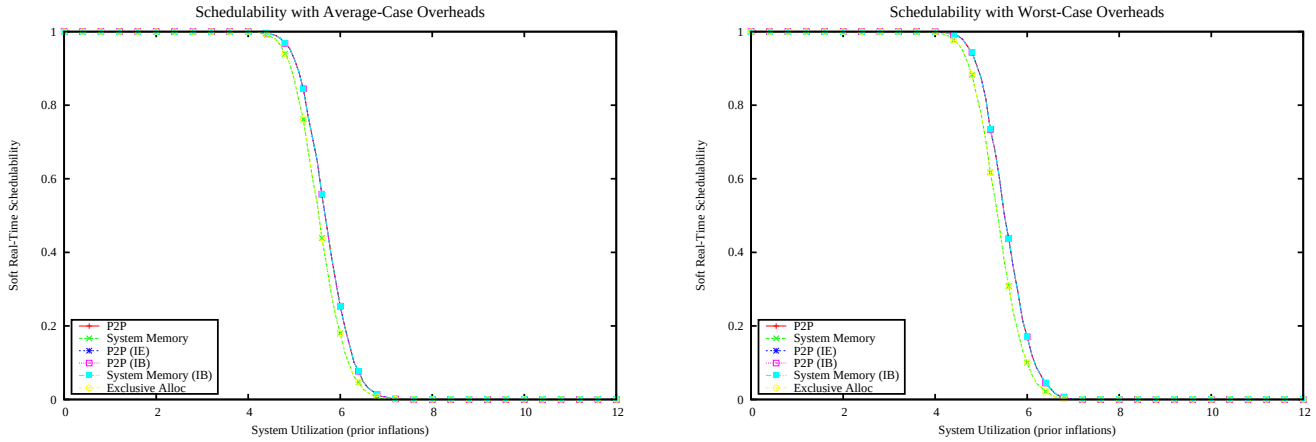

Figure 4059: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

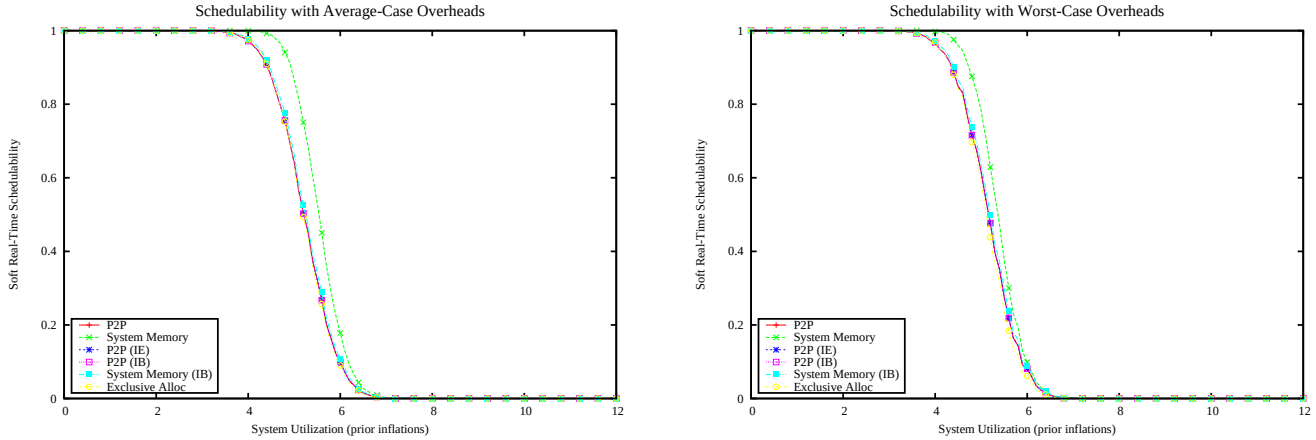

Figure 4060: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

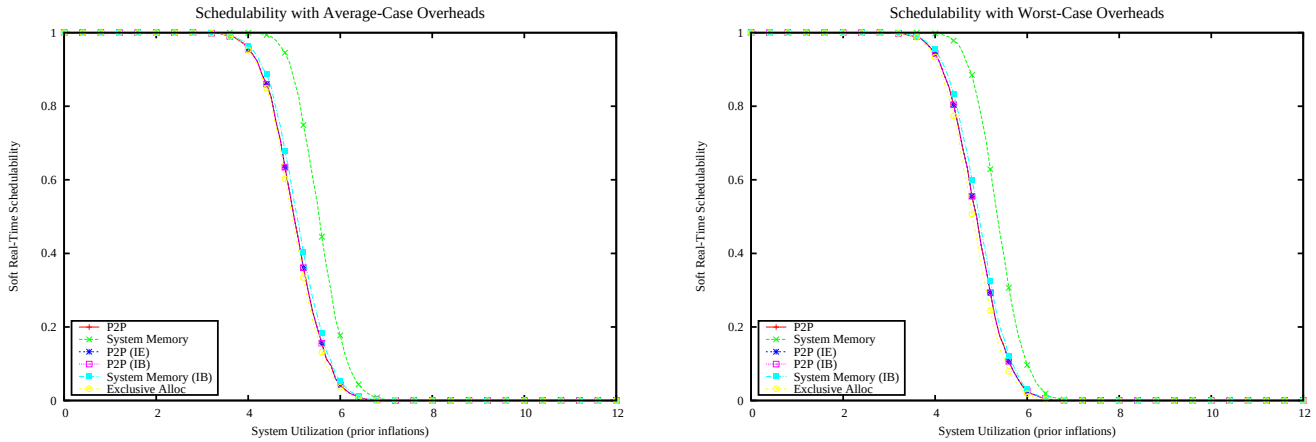

Figure 4061: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

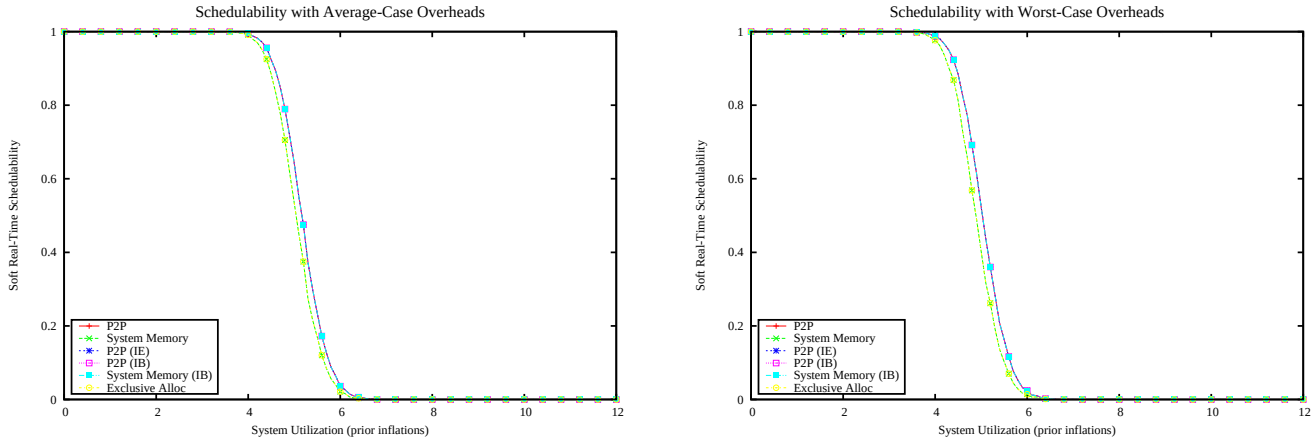

Figure 4062: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

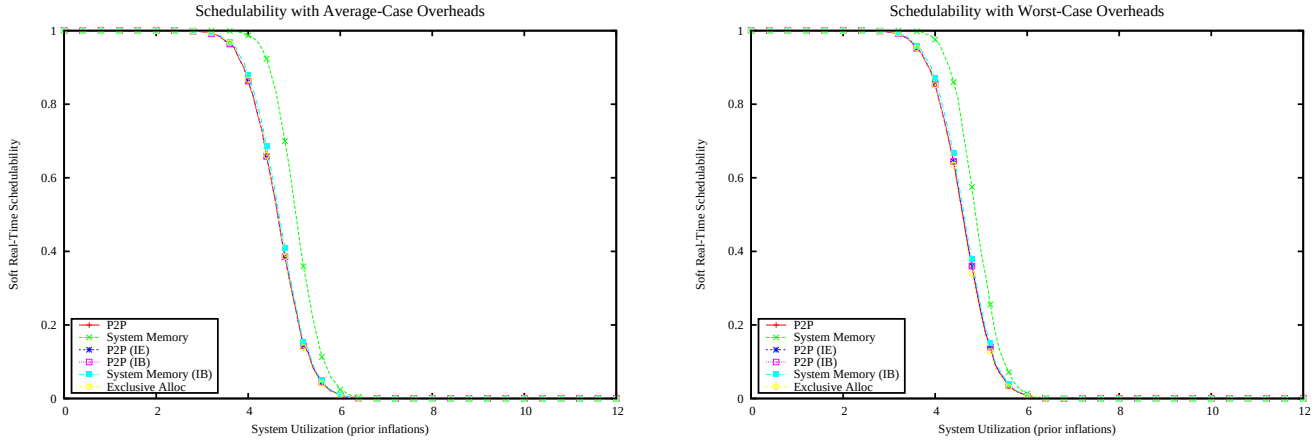

Figure 4063: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

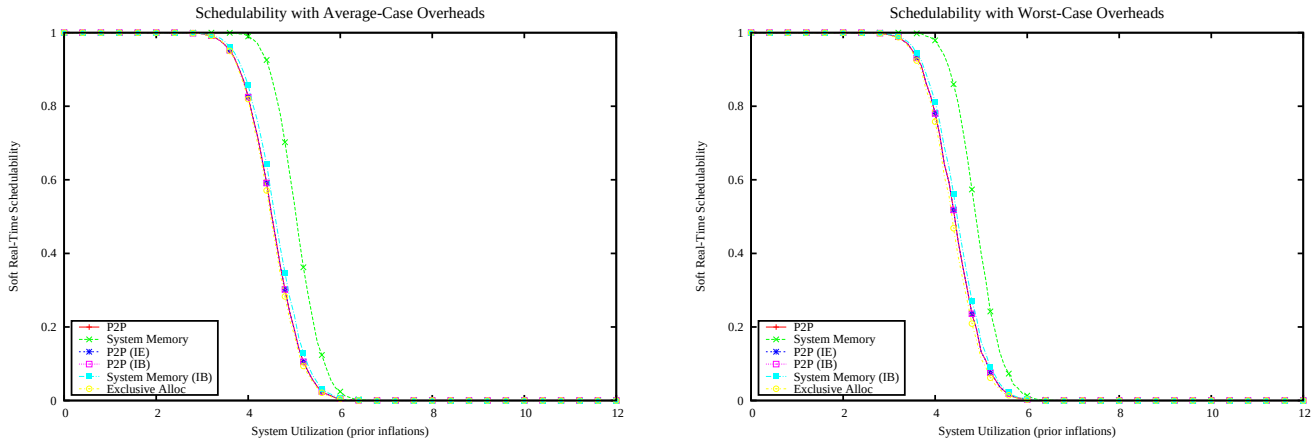

Figure 4064: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

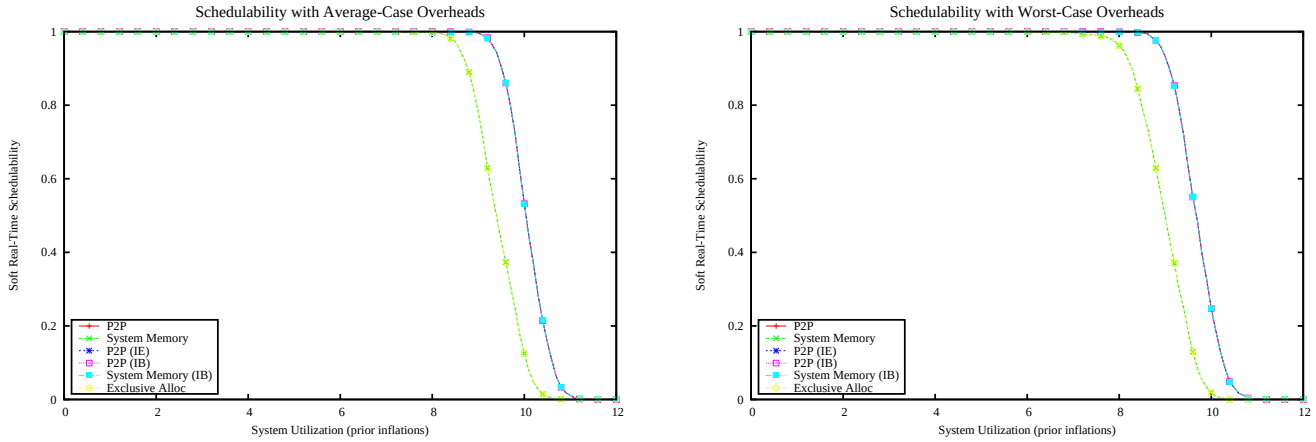

Figure 4065: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

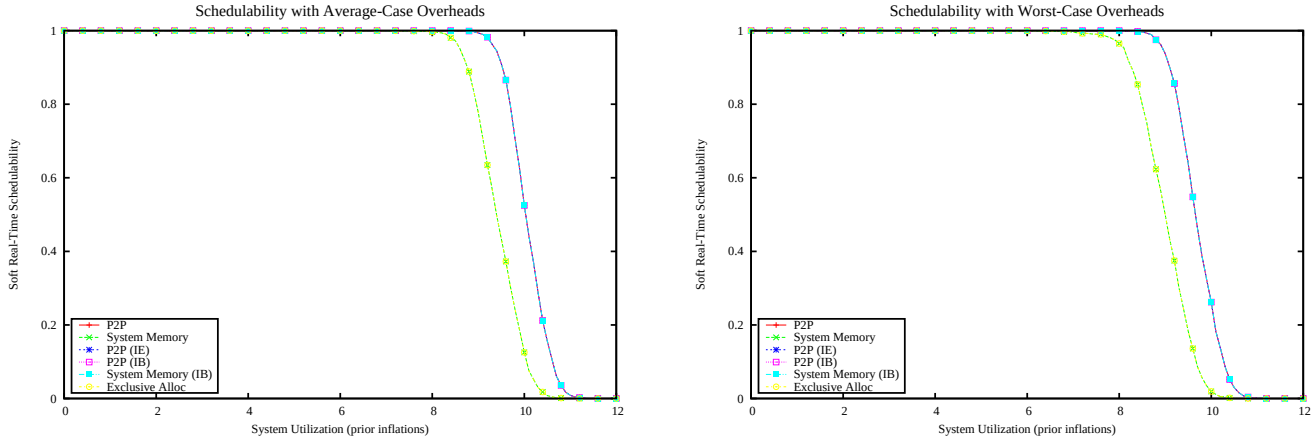

Figure 4066: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

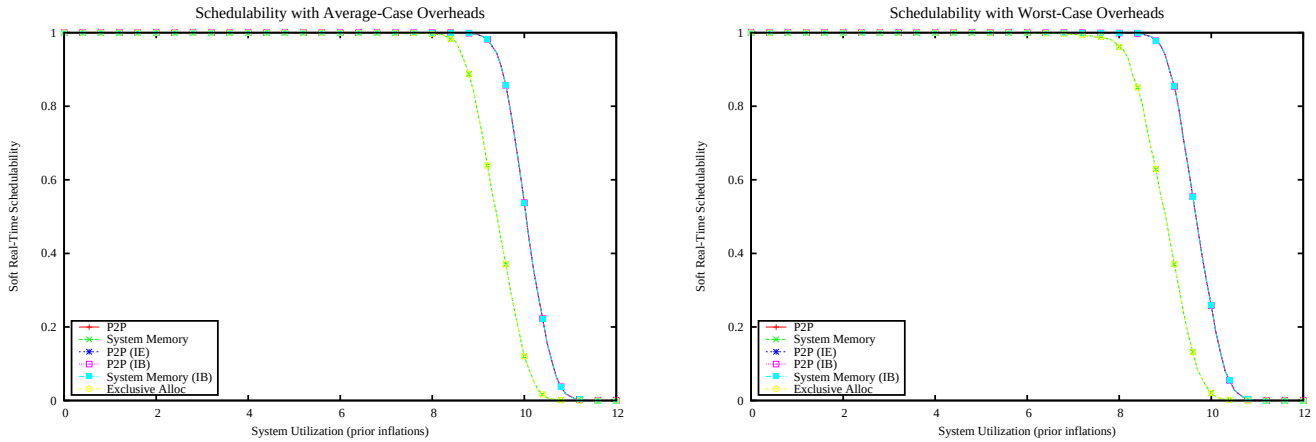

Figure 4067: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

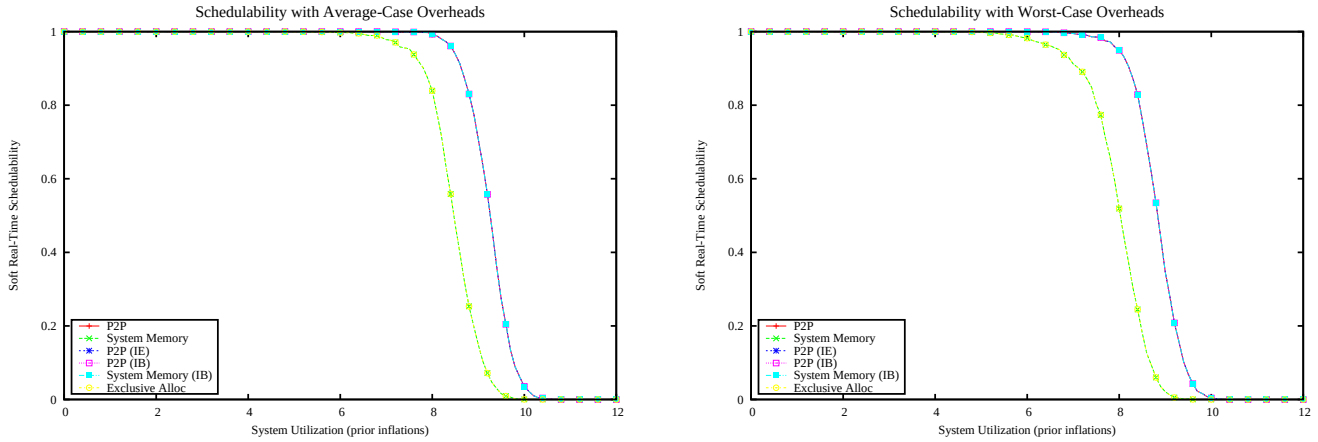

Figure 4068: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

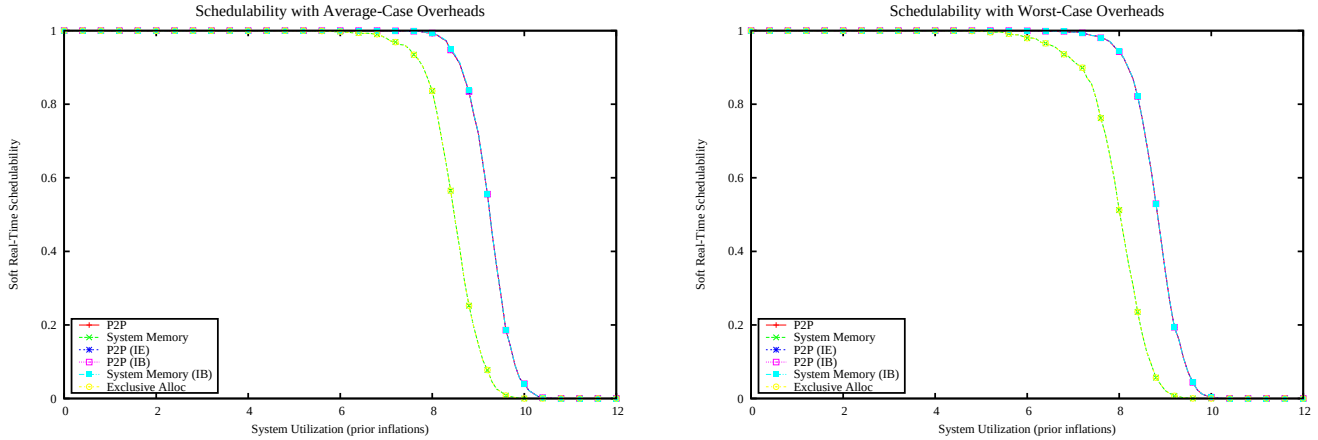

Figure 4069: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

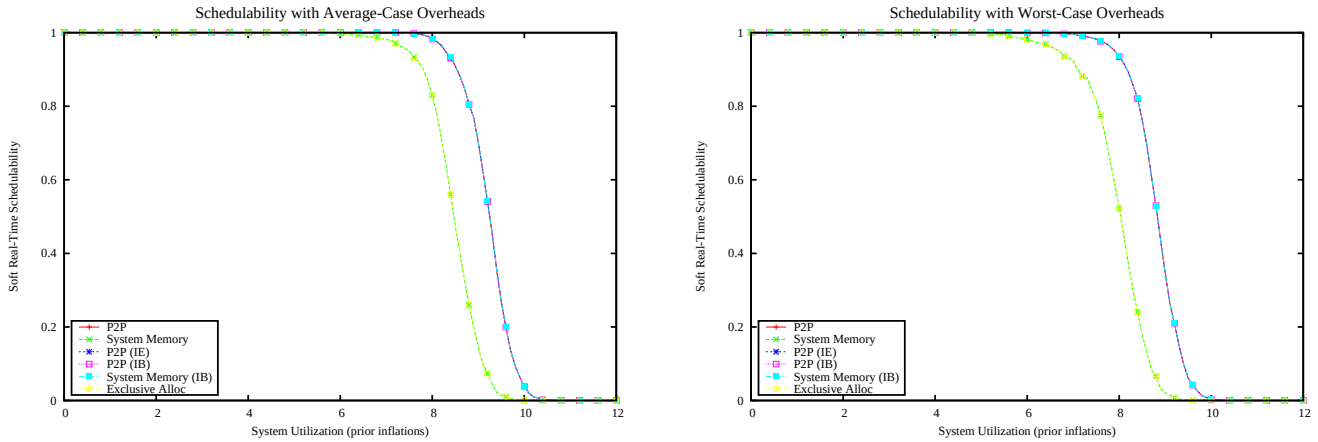

Figure 4070: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

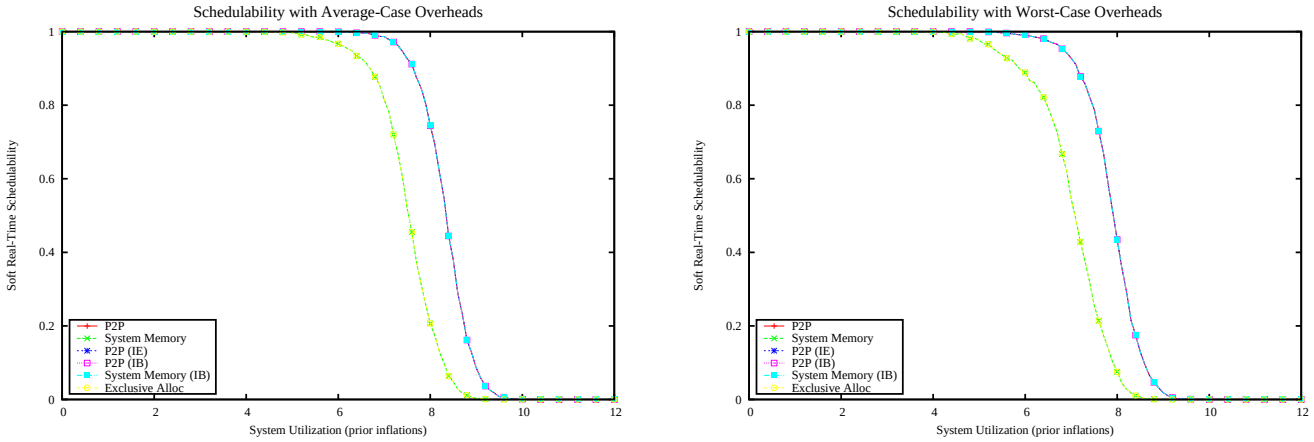

Figure 4071: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

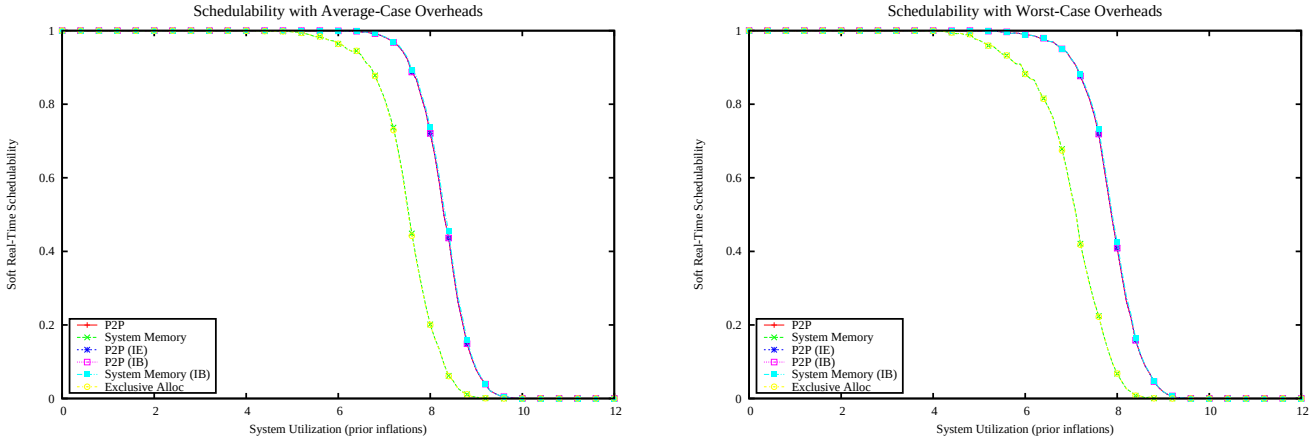

Figure 4072: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

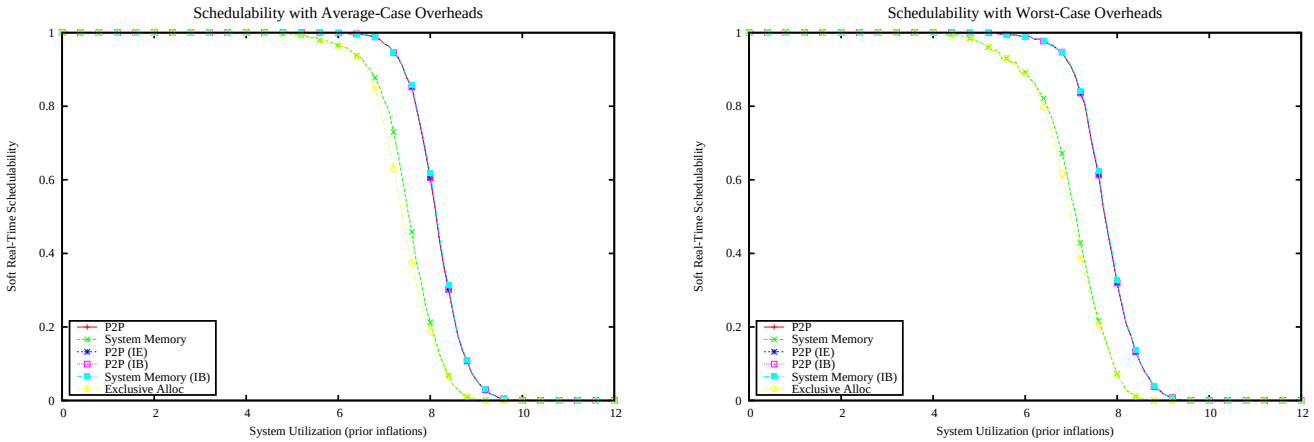

Figure 4073: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

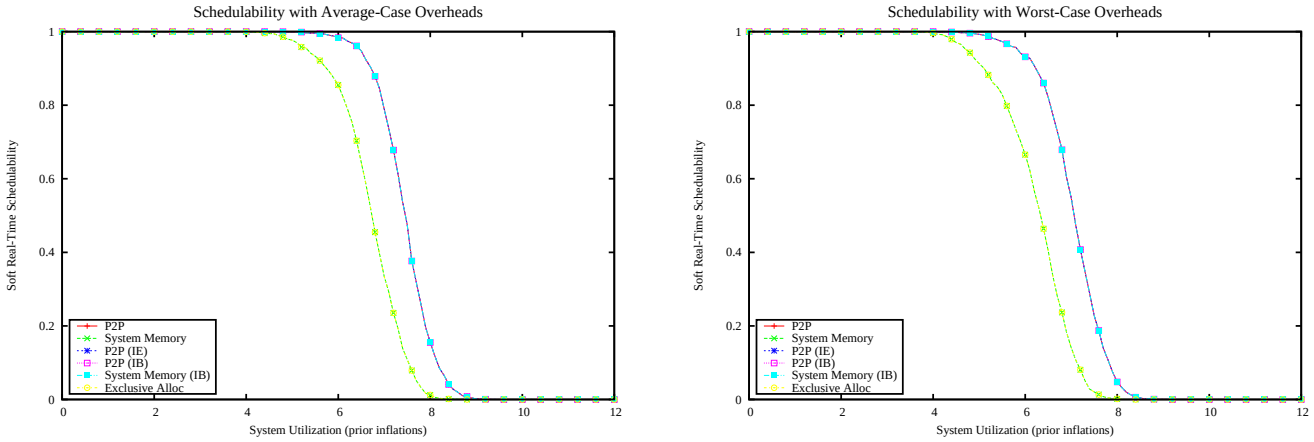

Figure 4074: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

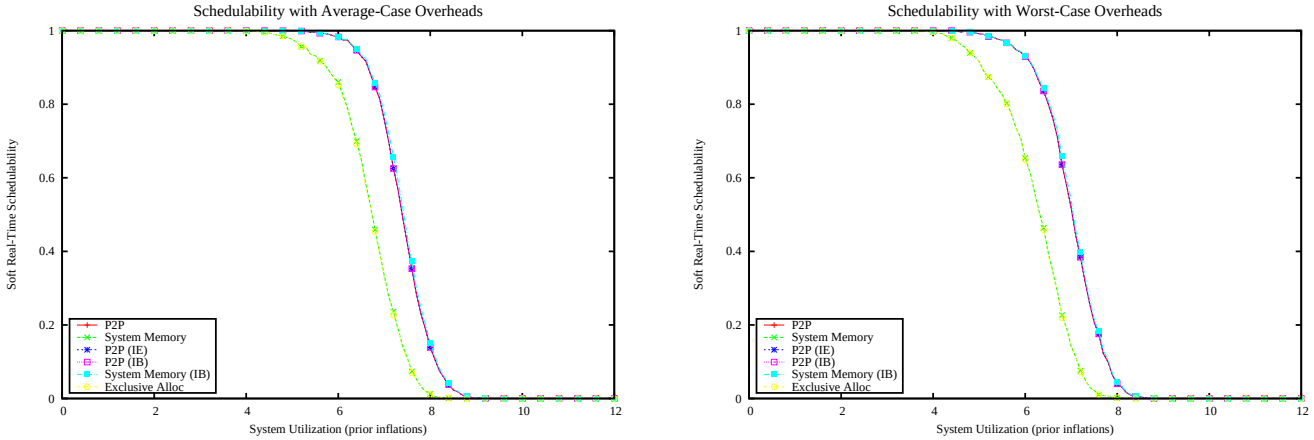

Figure 4075: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

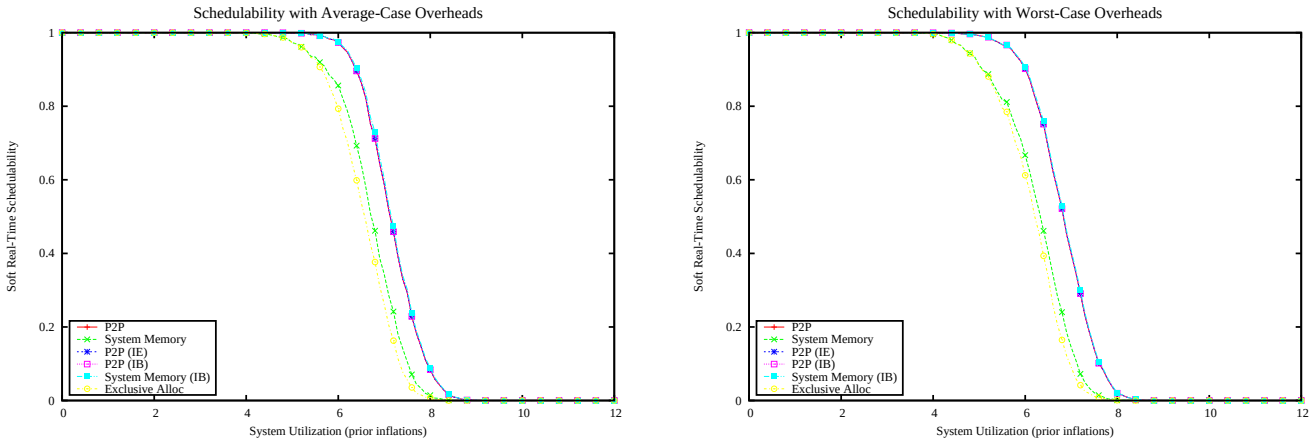

Figure 4076: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

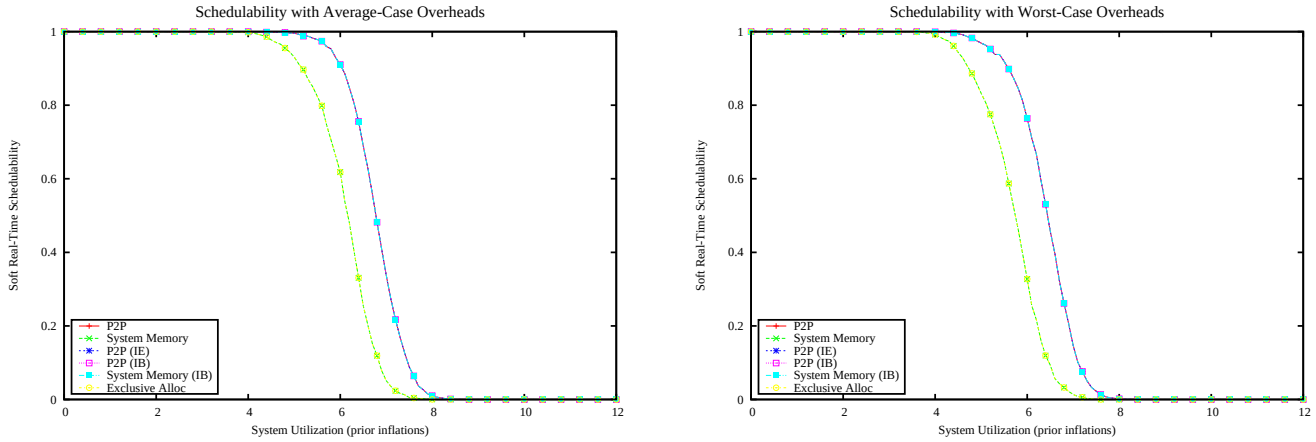

Figure 4077: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

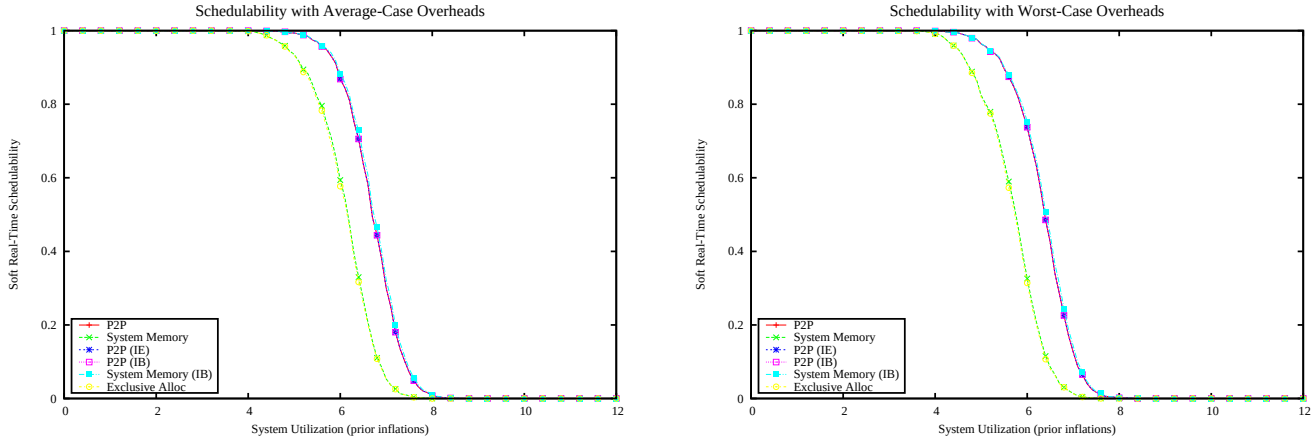

Figure 4078: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

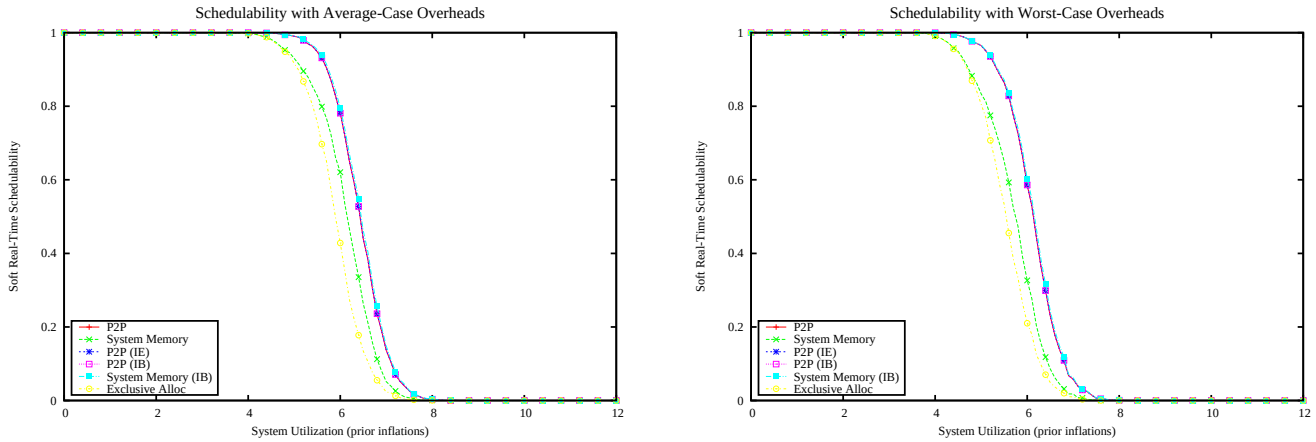

Figure 4079: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

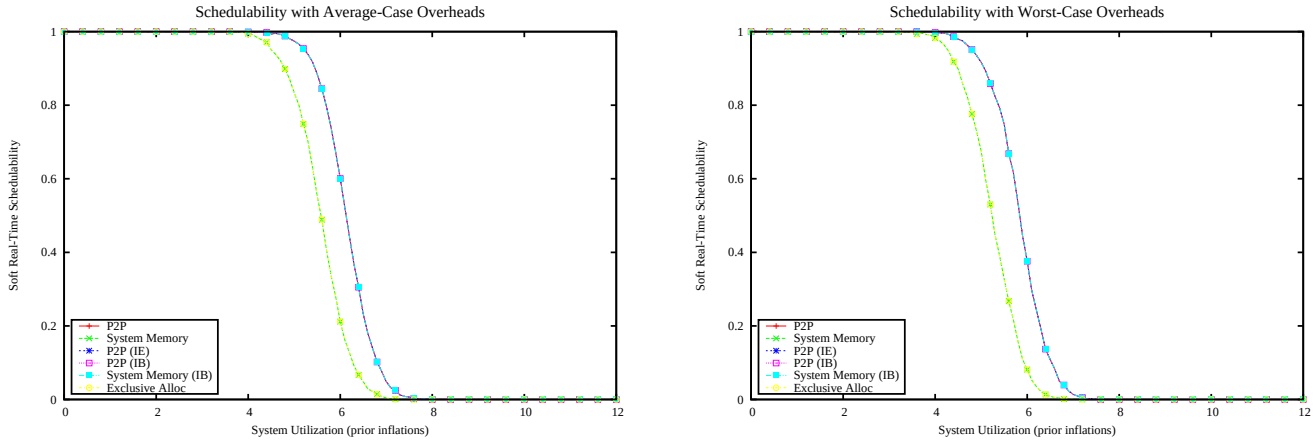

Figure 4080: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

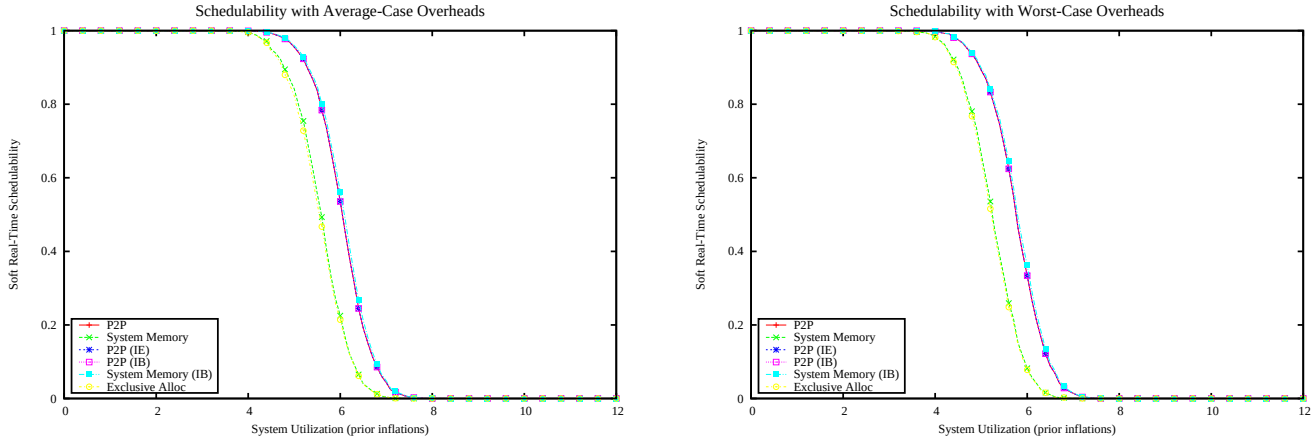

Figure 4081: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

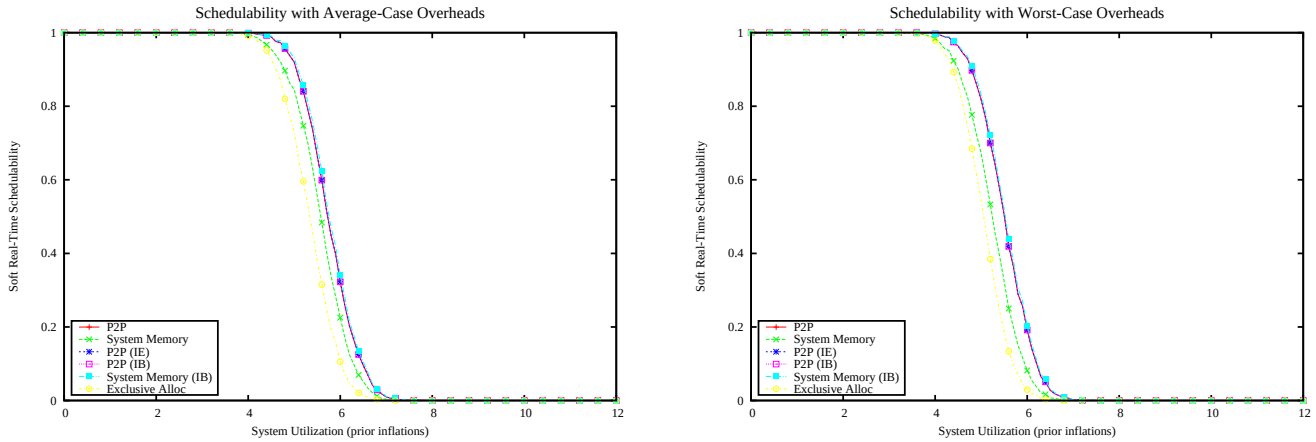

Figure 4082: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

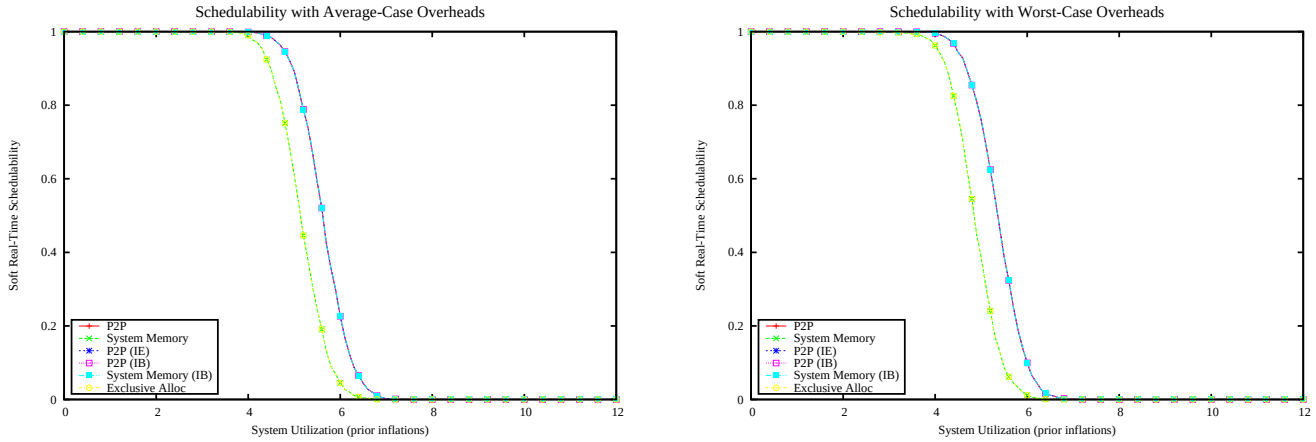

Figure 4083: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

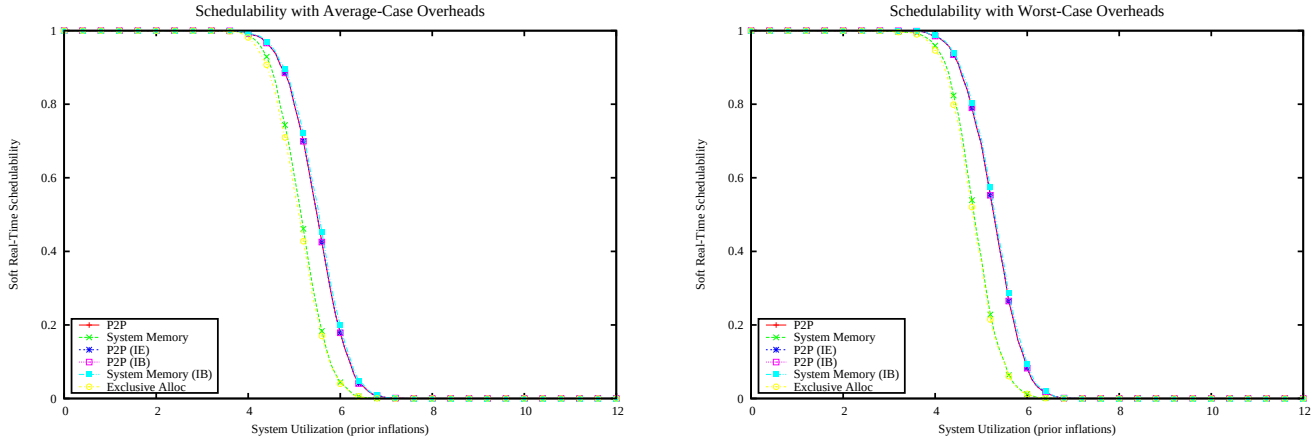

Figure 4084: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

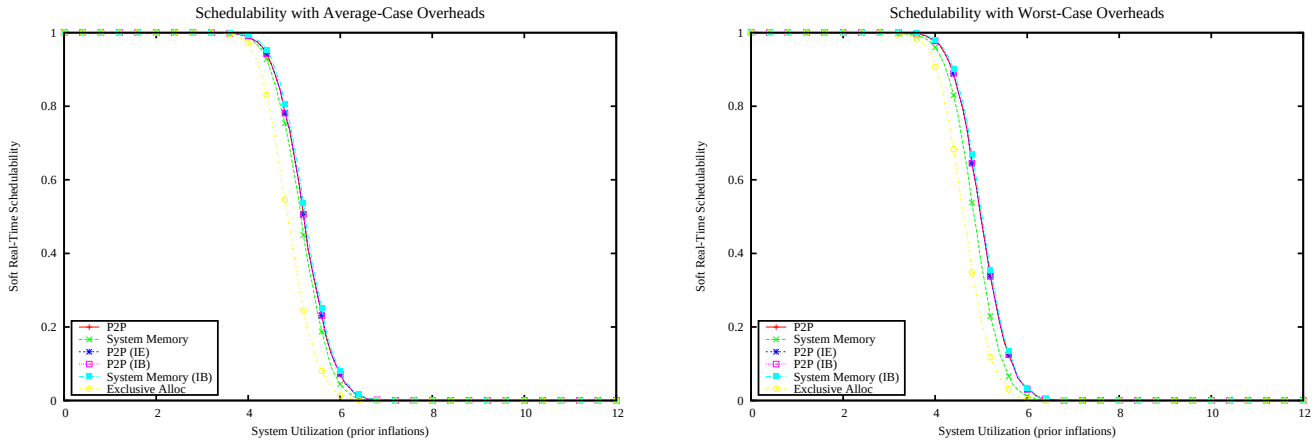

Figure 4085: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

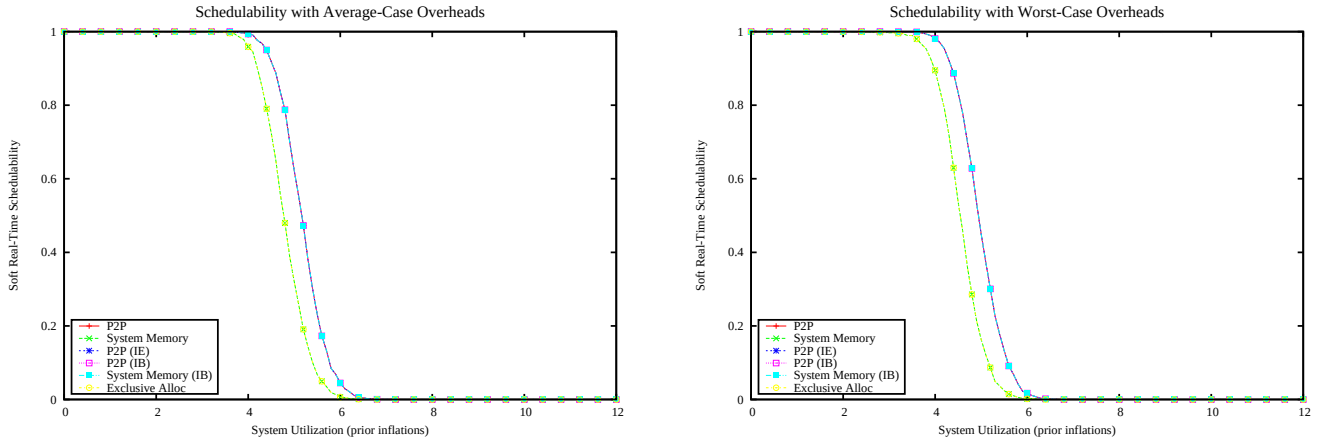

Figure 4086: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

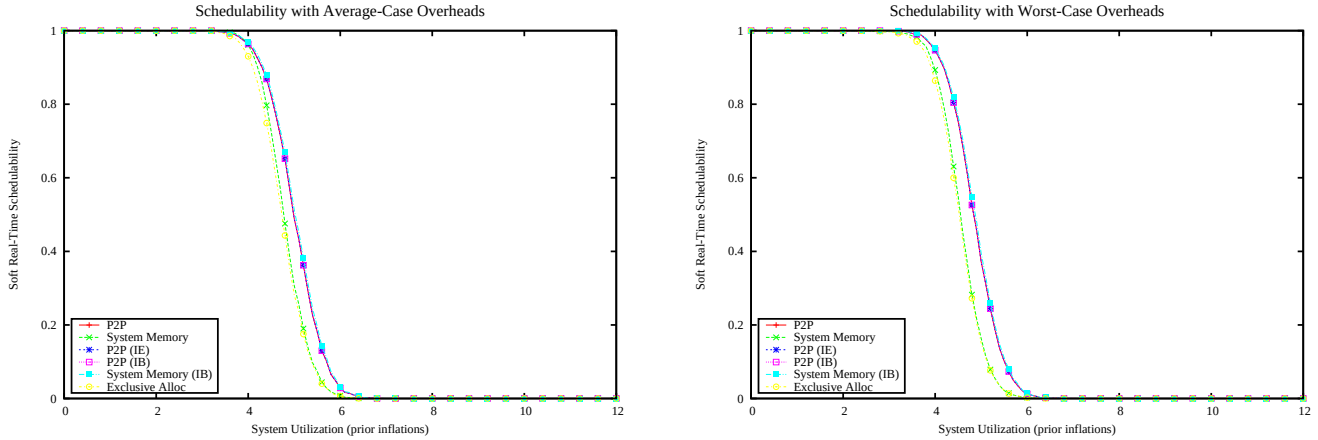

Figure 4087: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

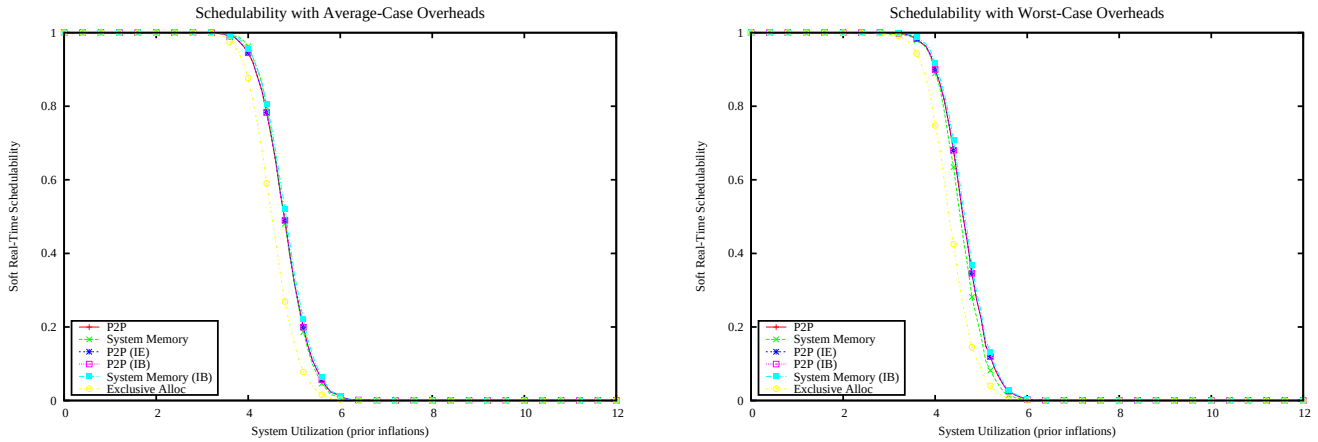

Figure 4088: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

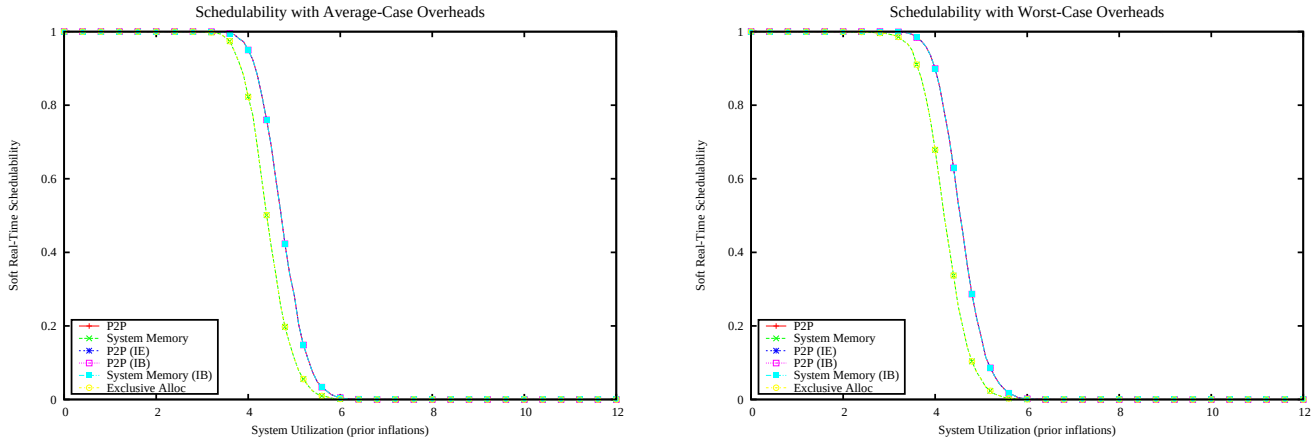

Figure 4089: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

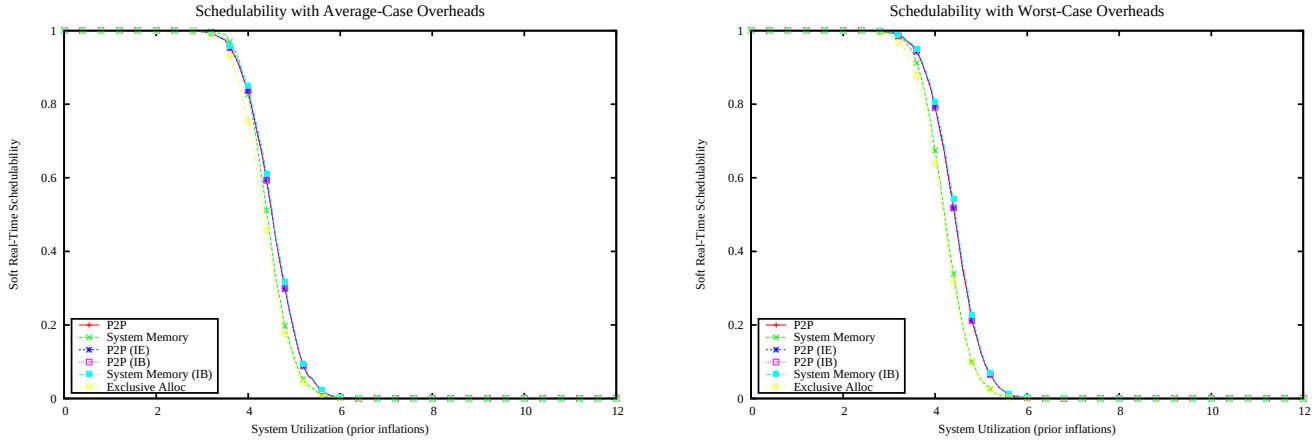

Figure 4090: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

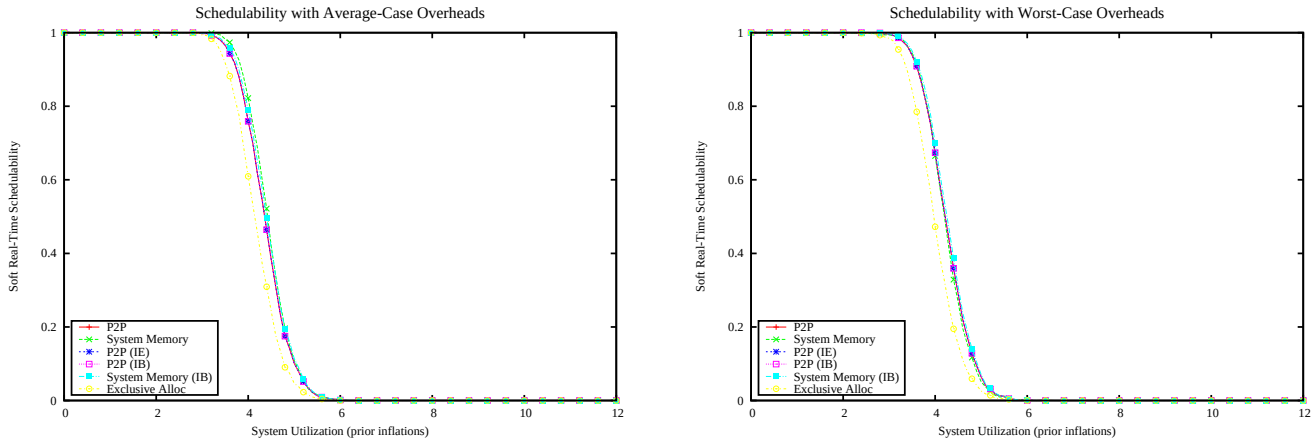

Figure 4091: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

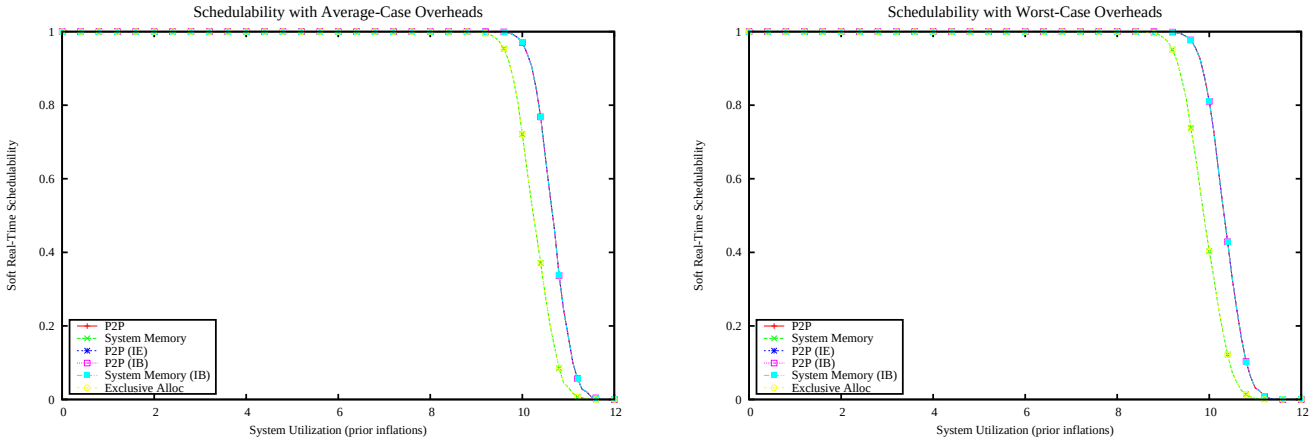

Figure 4092: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

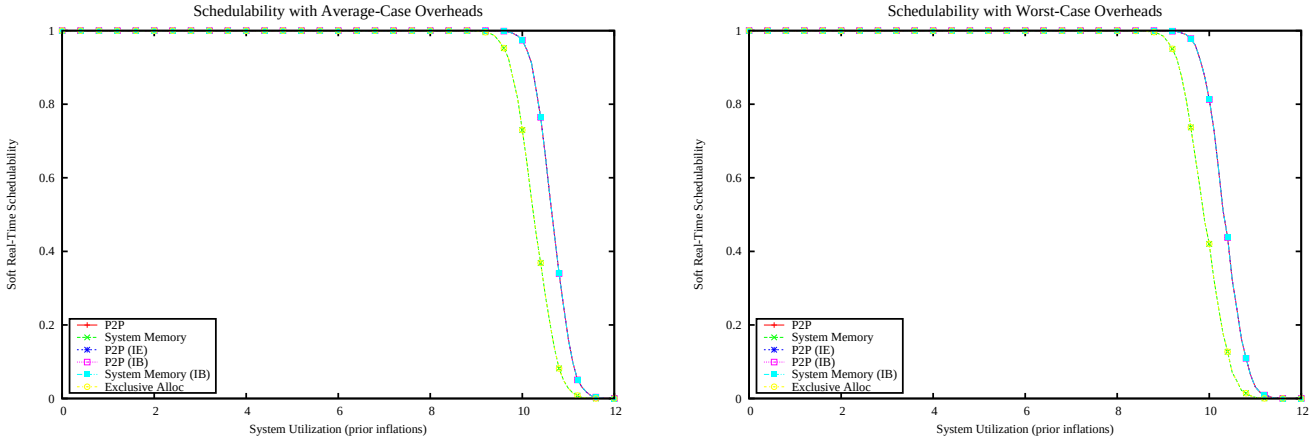

Figure 4093: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

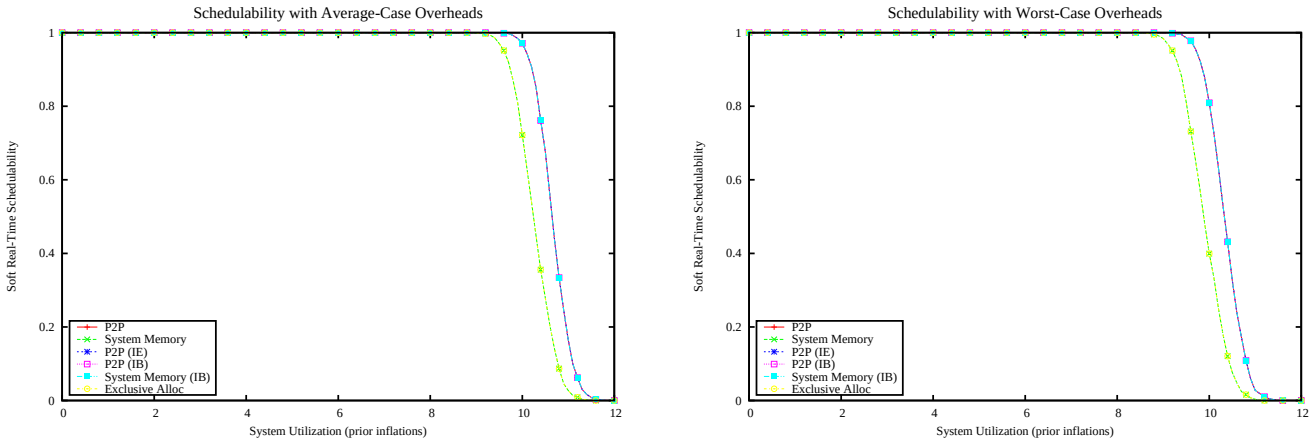

Figure 4094: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

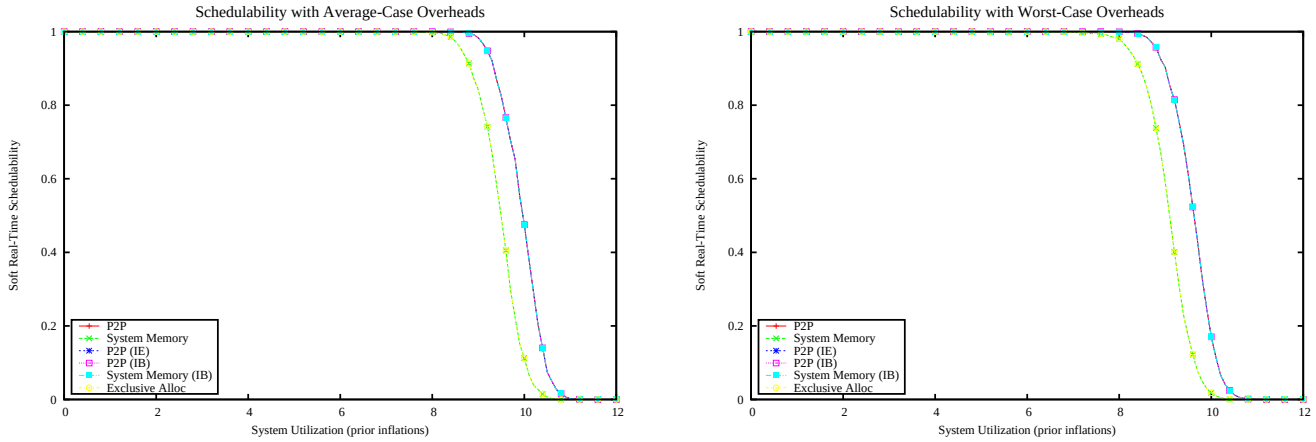

Figure 4095: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

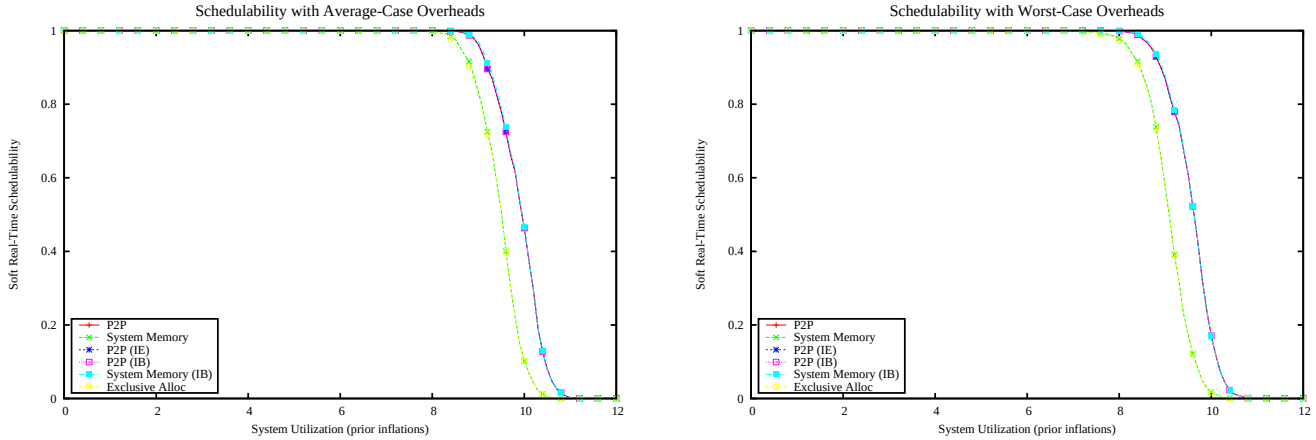

Figure 4096: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

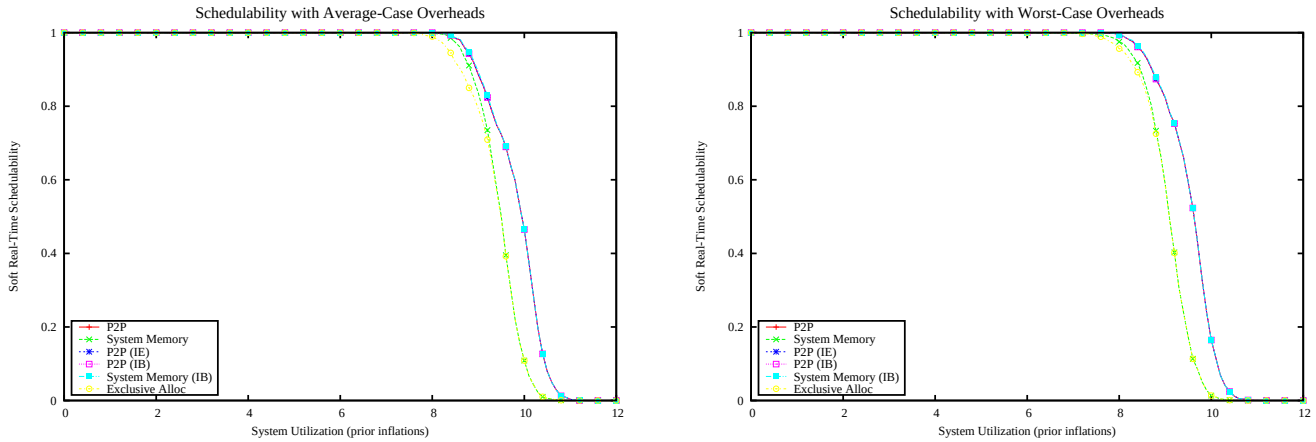

Figure 4097: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

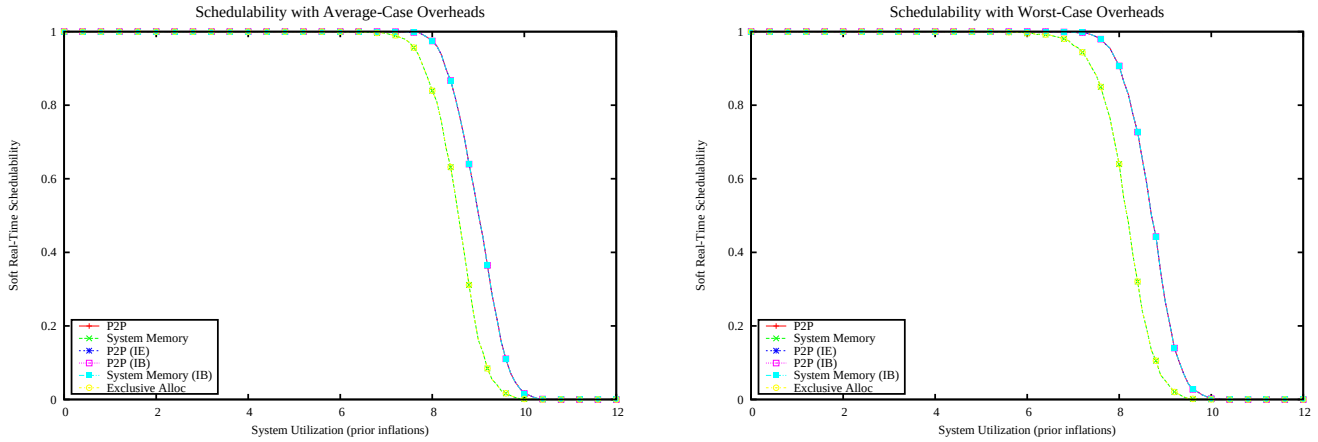

Figure 4098: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

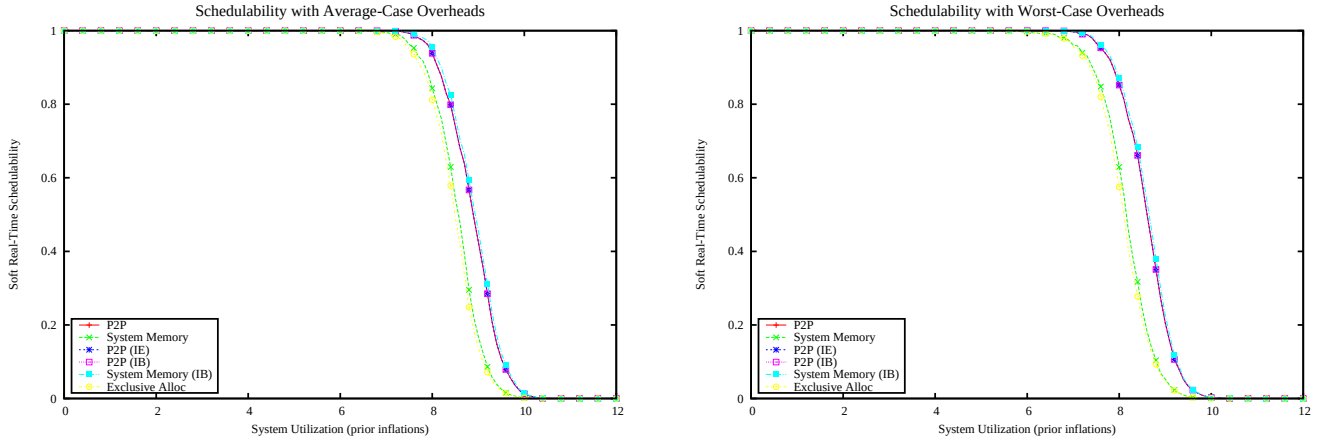

Figure 4099: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

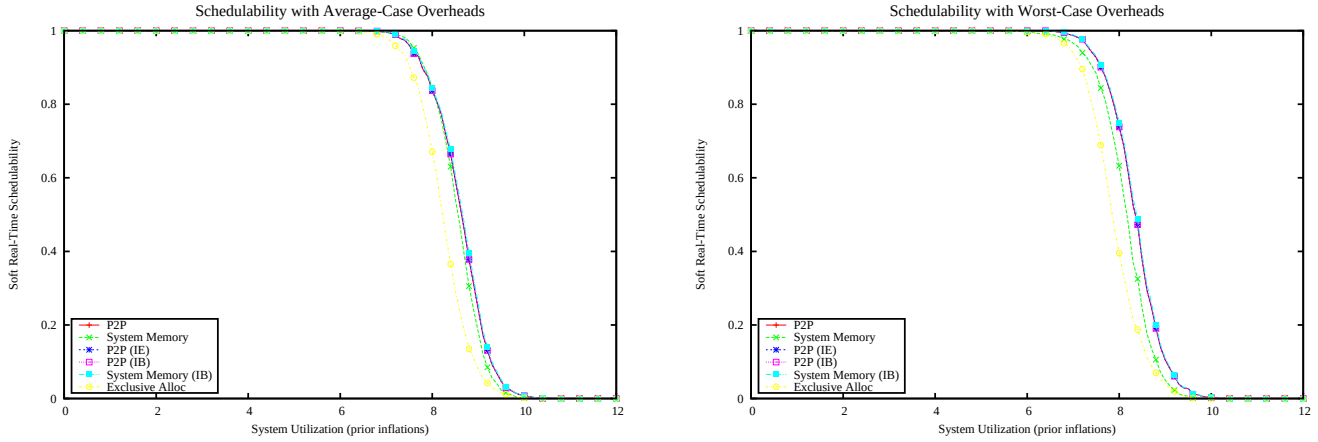

Figure 4100: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

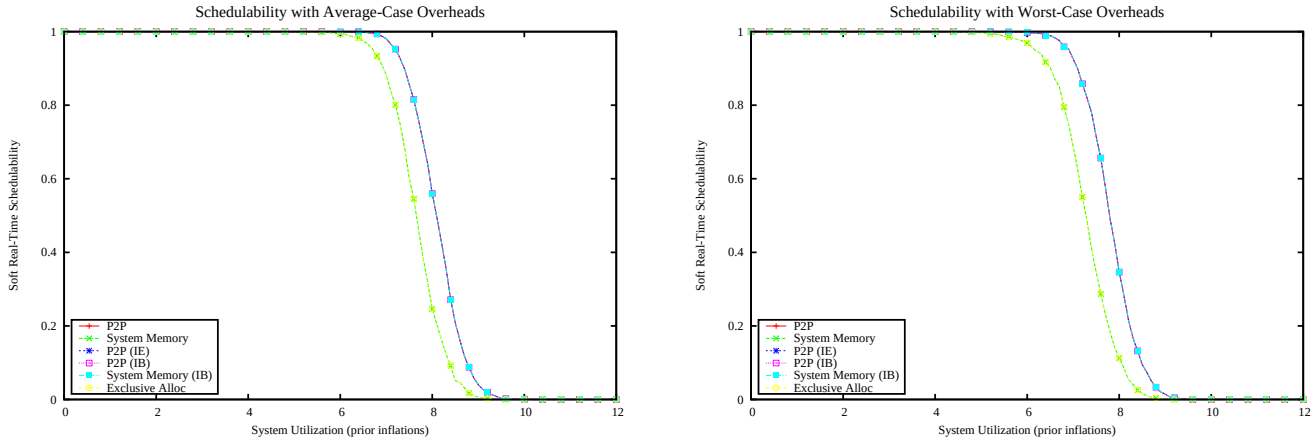

Figure 4101: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

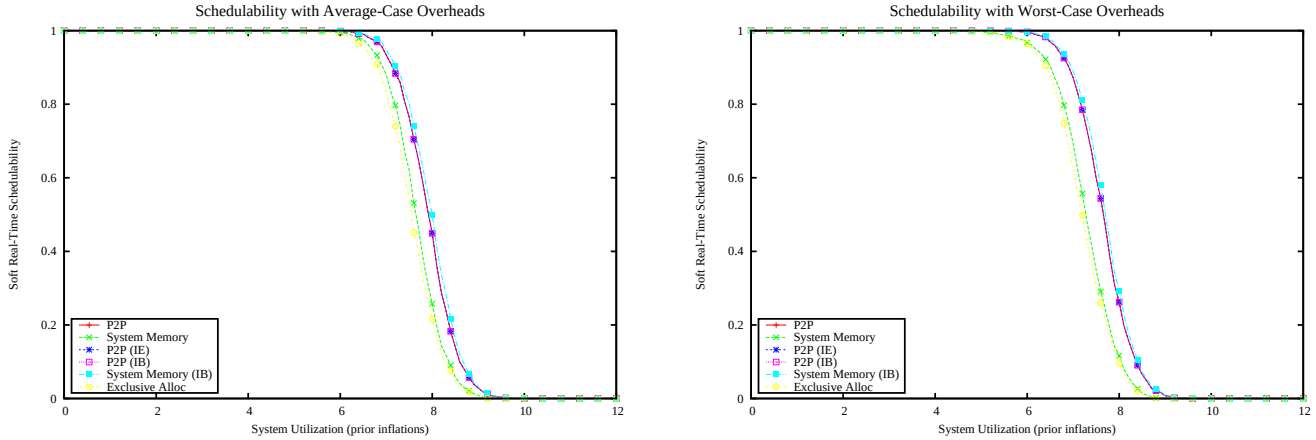

Figure 4102: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

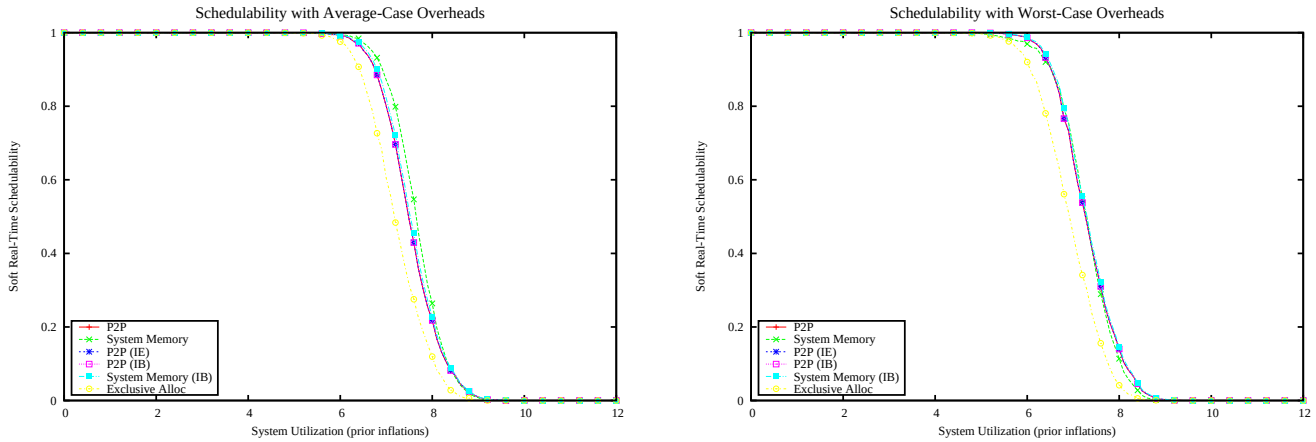

Figure 4103: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

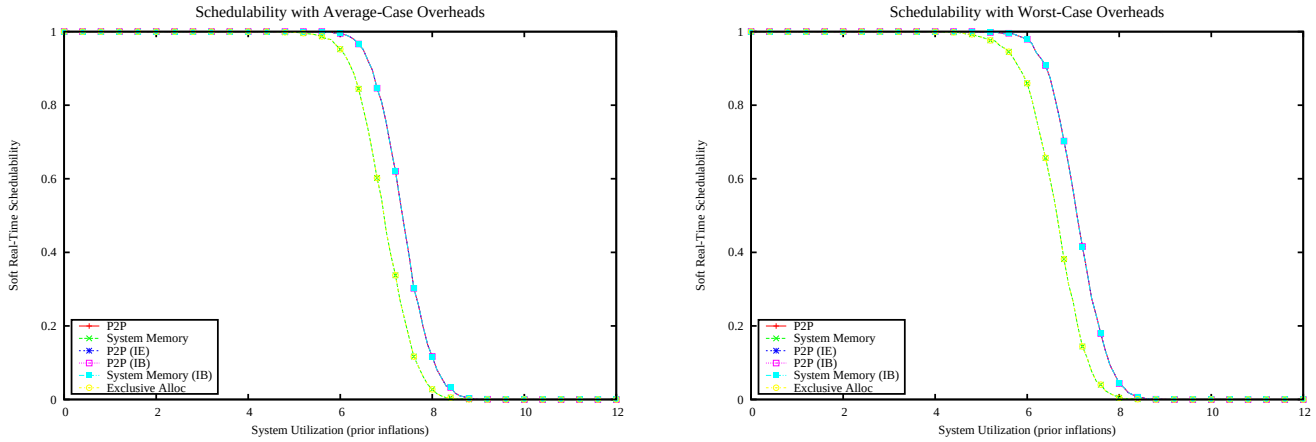

Figure 4104: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

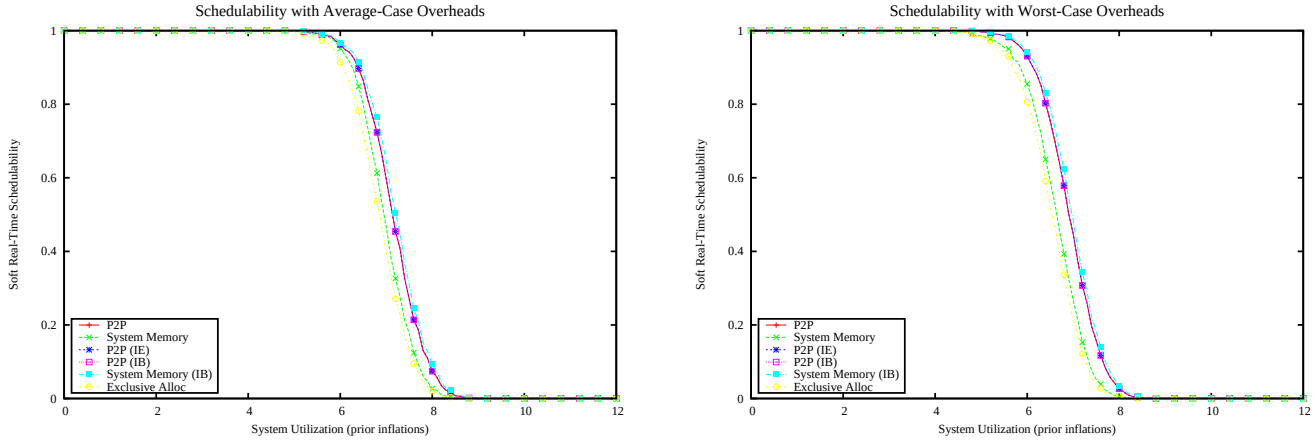

Figure 4105: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

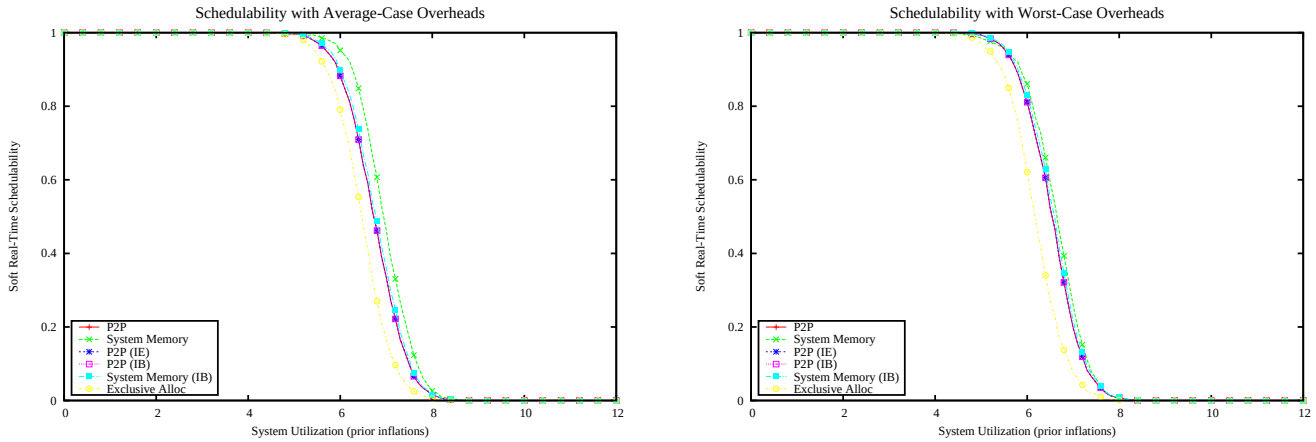

Figure 4106: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

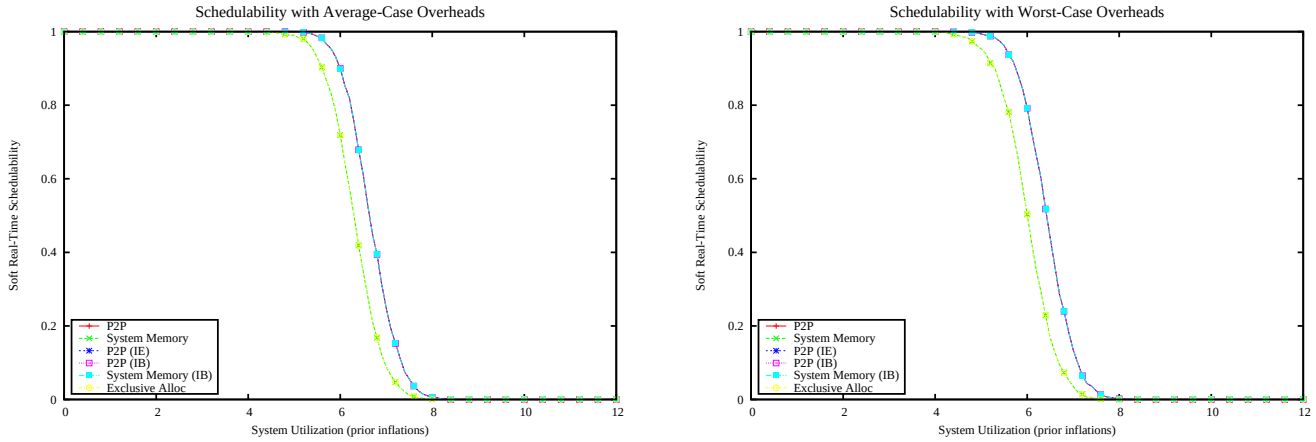

Figure 4107: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

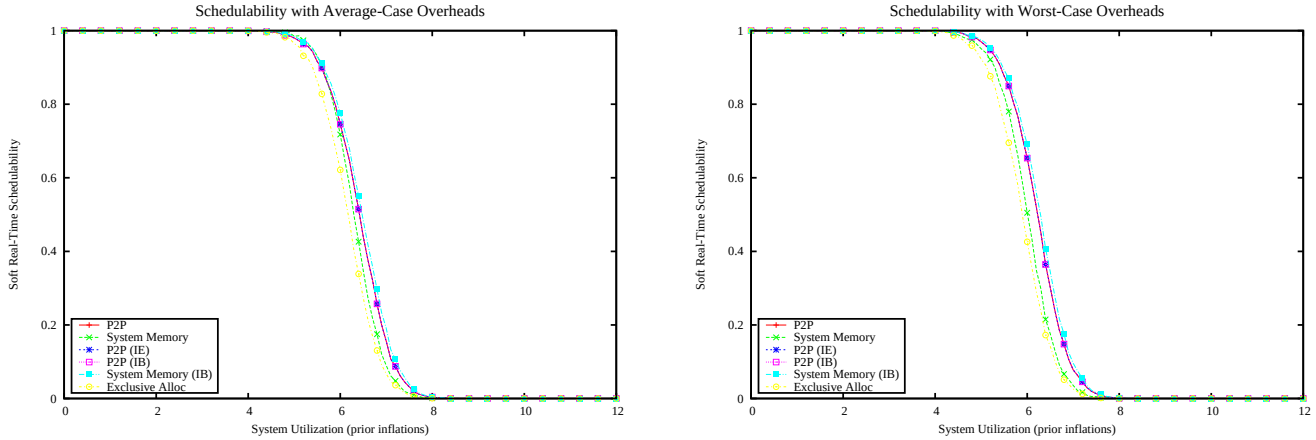

Figure 4108: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

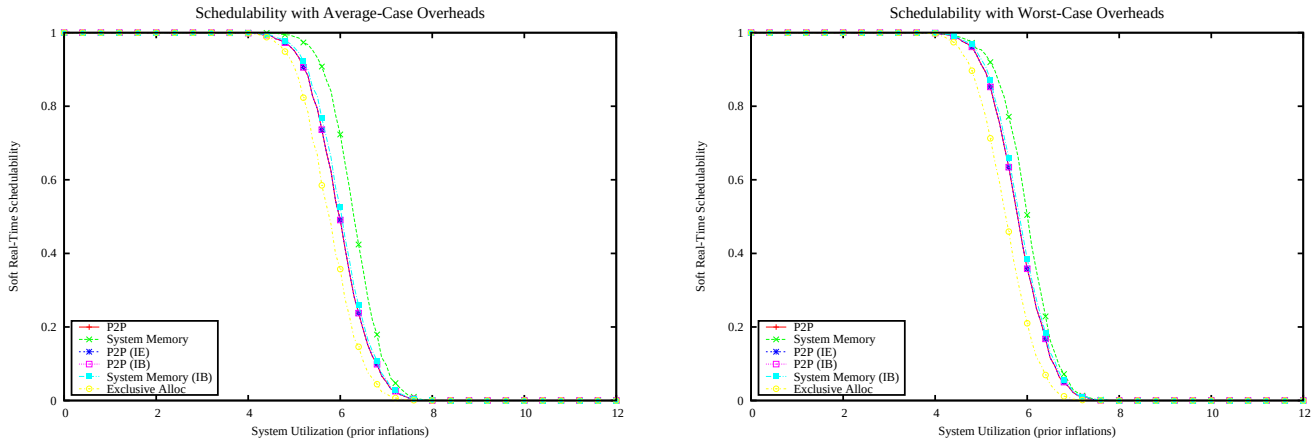

Figure 4109: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

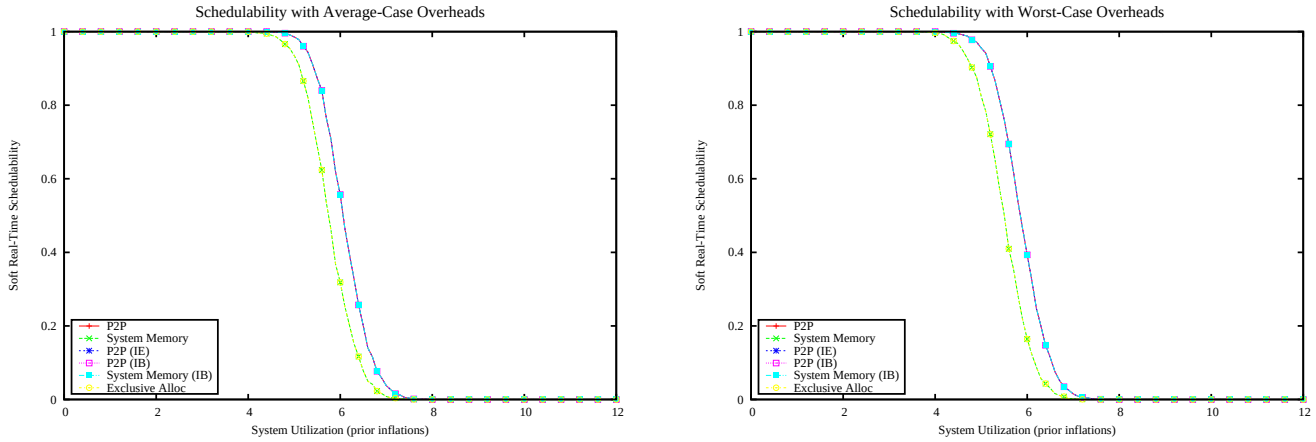

Figure 4110: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

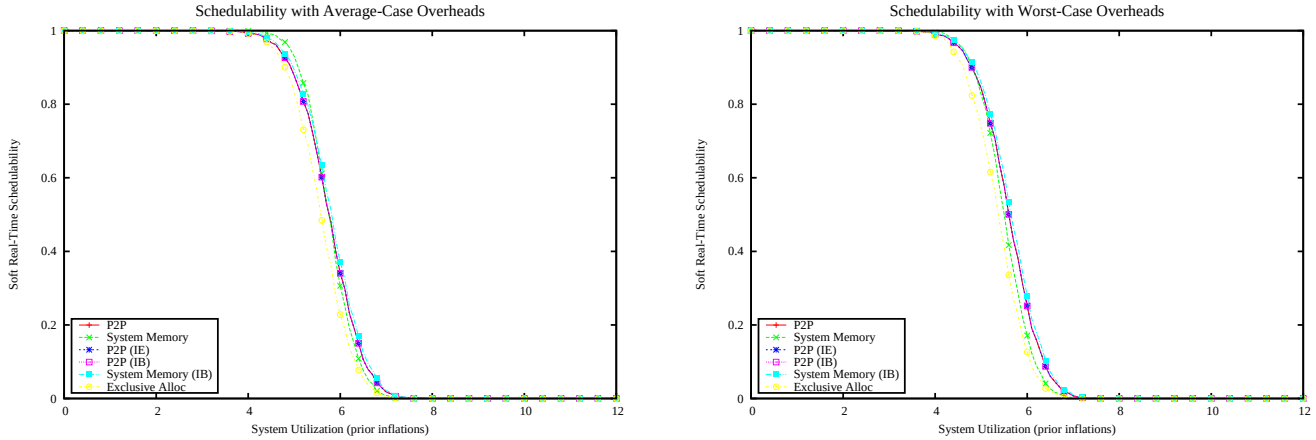

Figure 4111: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

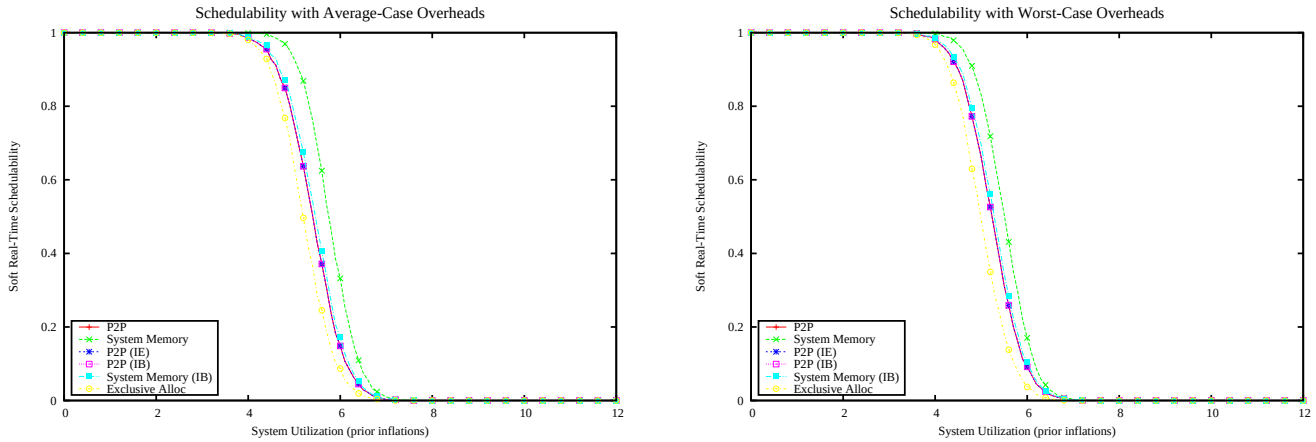

Figure 4112: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

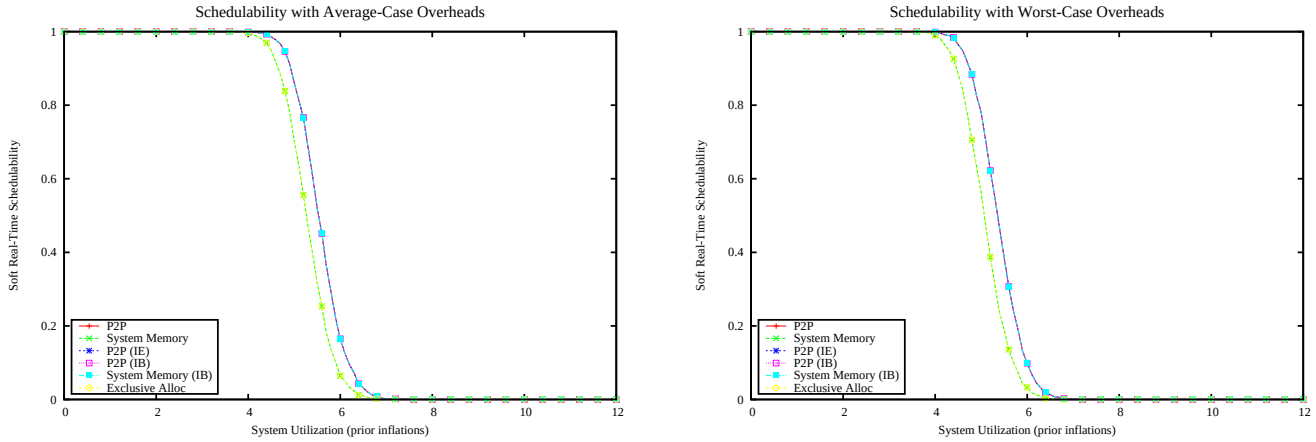

Figure 4113: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

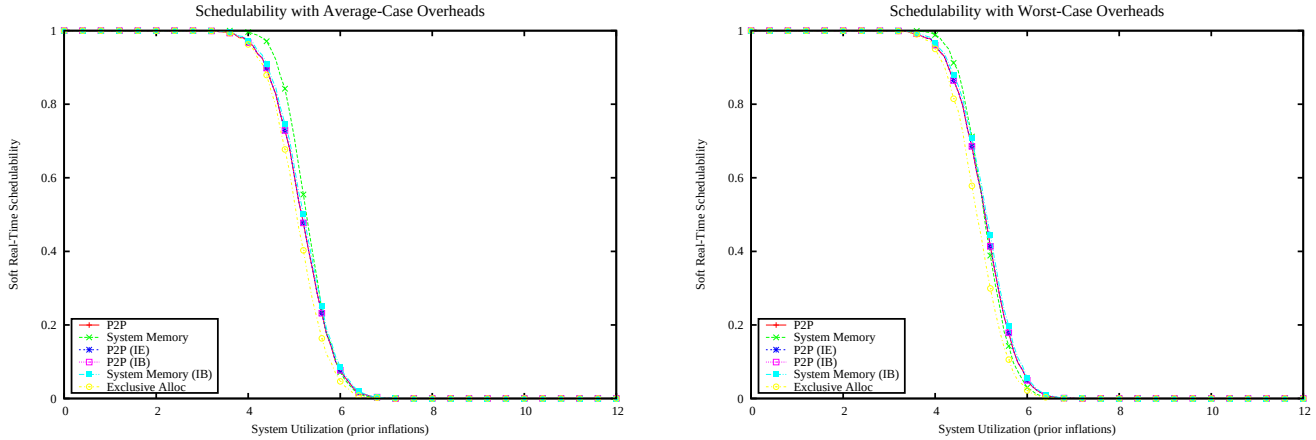

Figure 4114: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

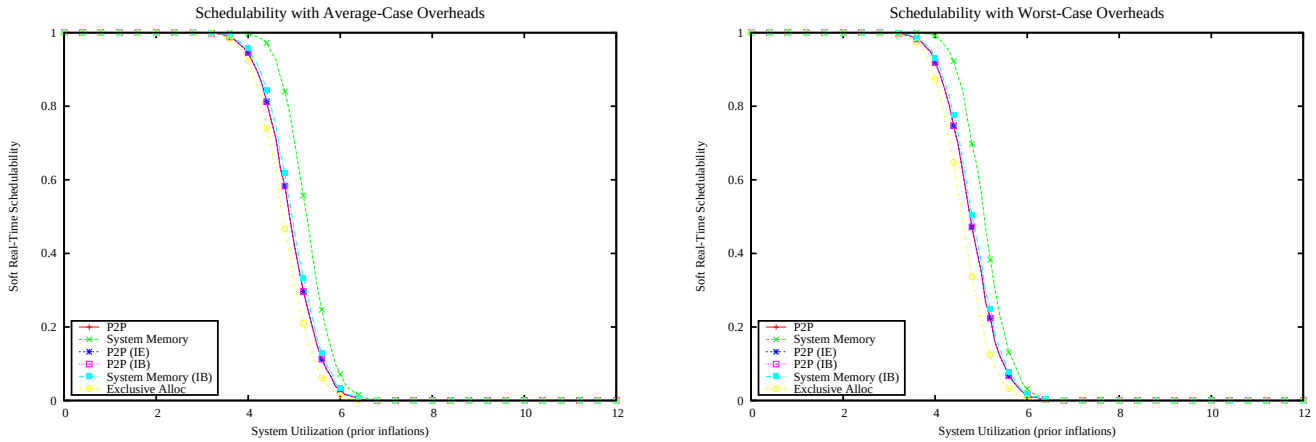

Figure 4115: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

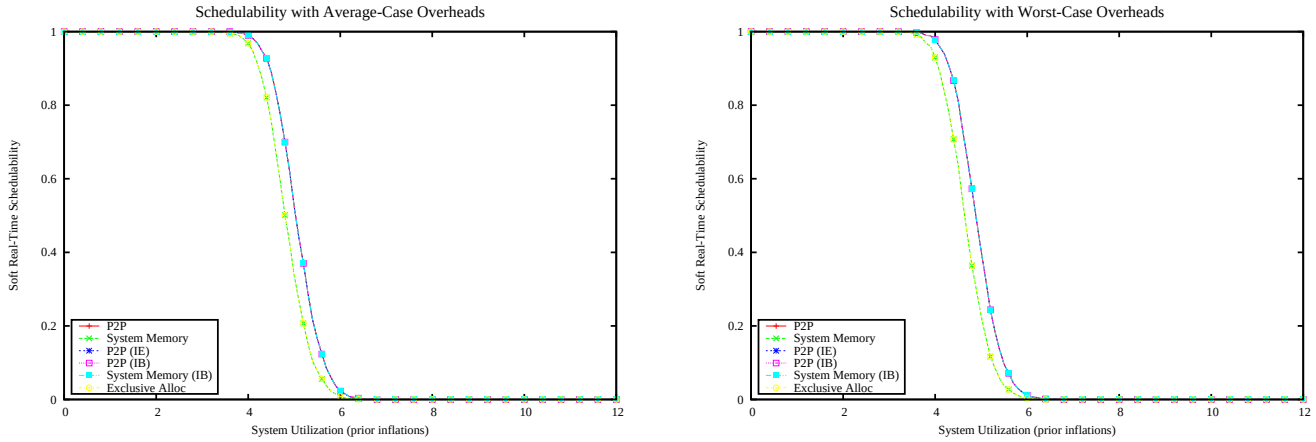

Figure 4116: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

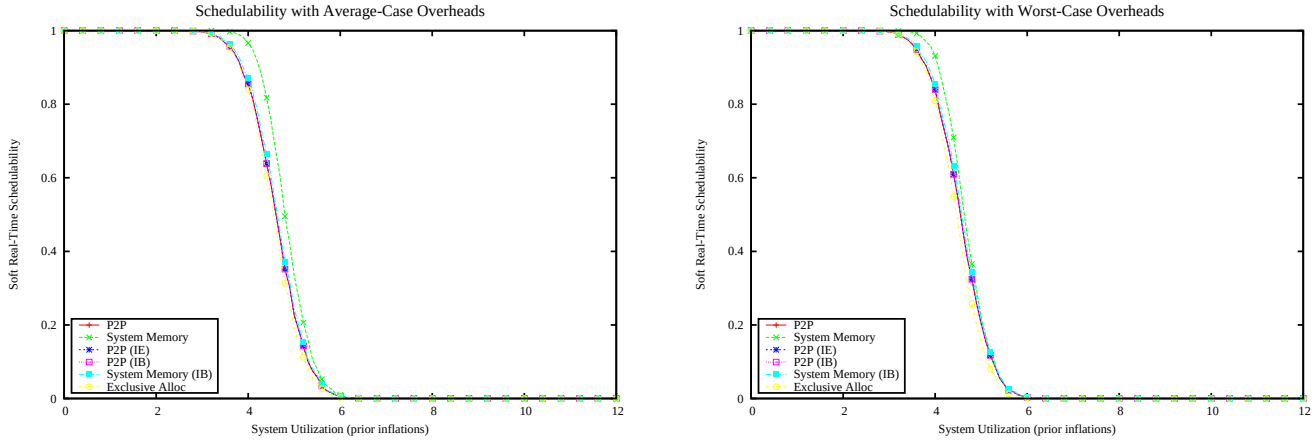

Figure 4117: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

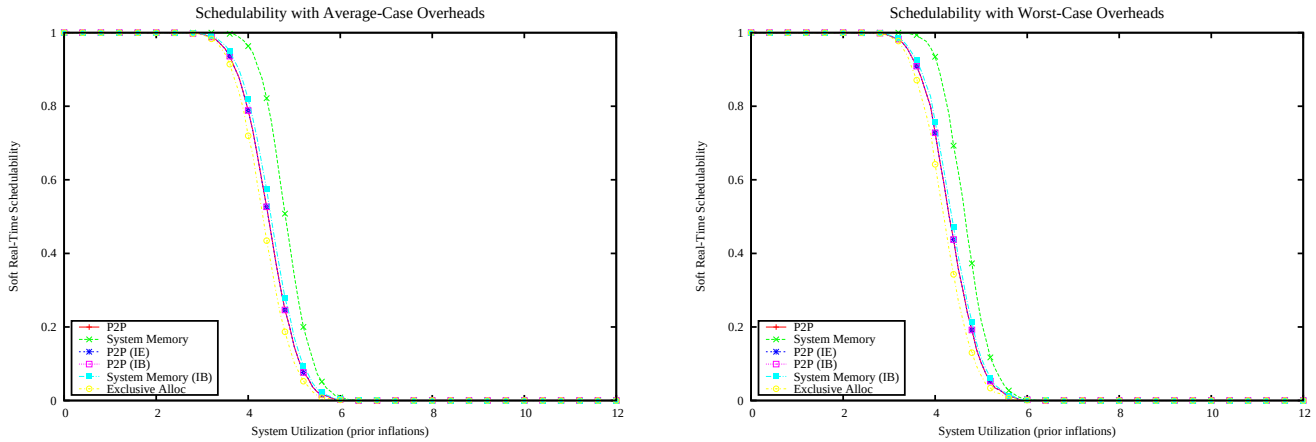

Figure 4118: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

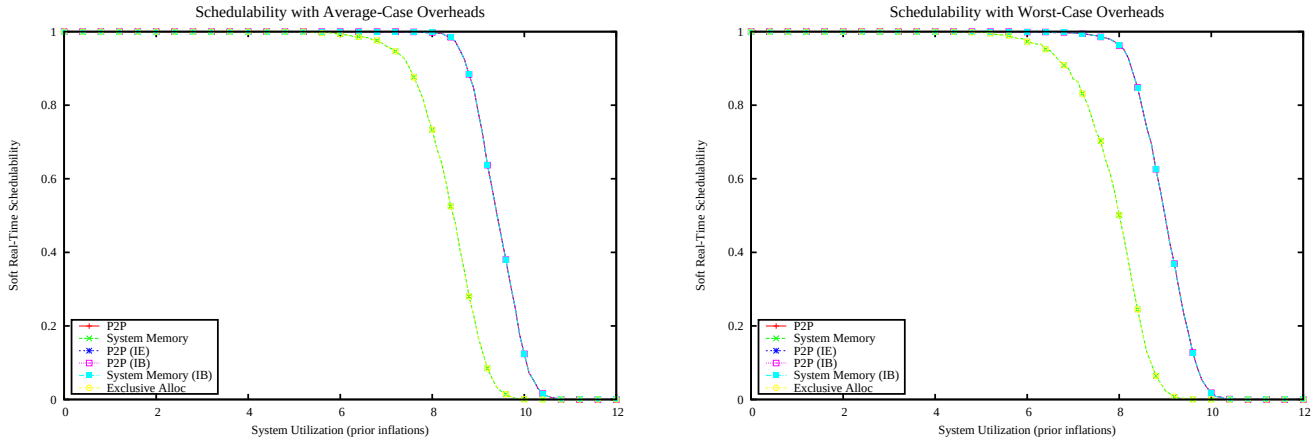

Figure 4119: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

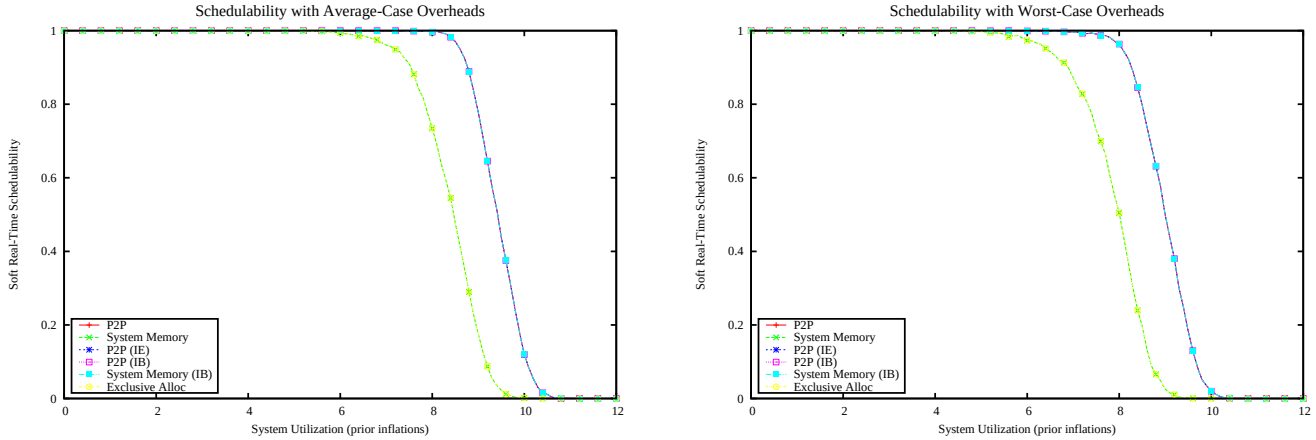

Figure 4120: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

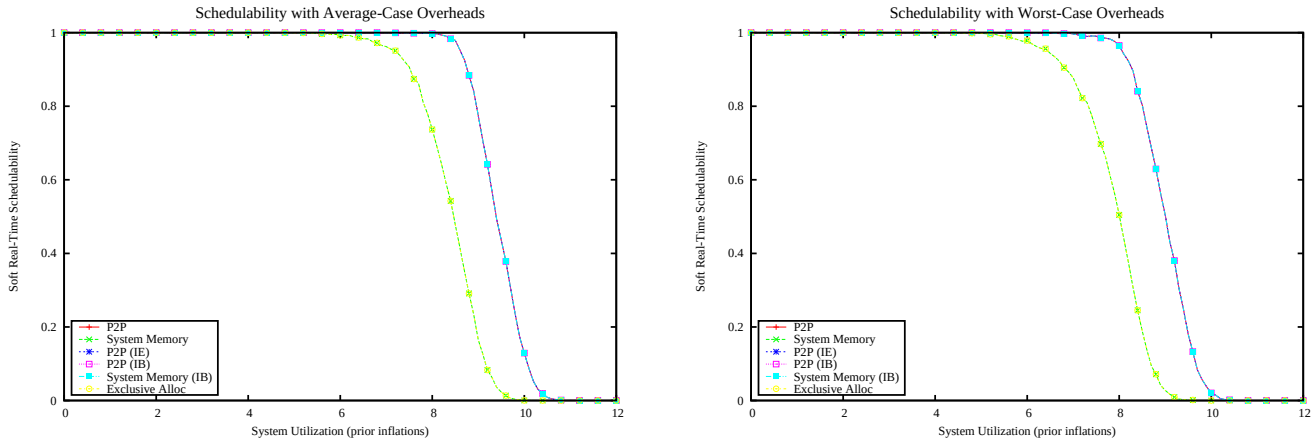

Figure 4121: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

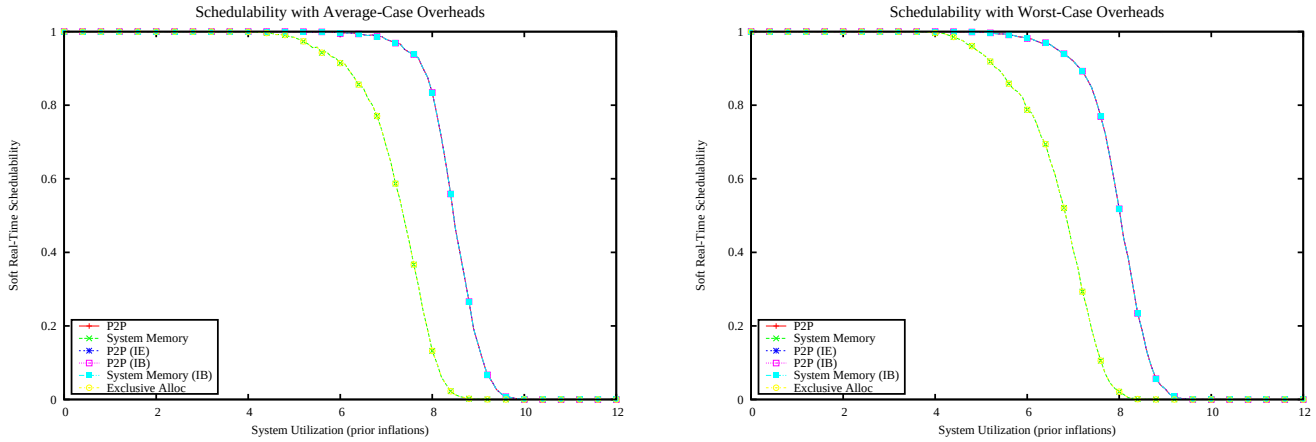

Figure 4122: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

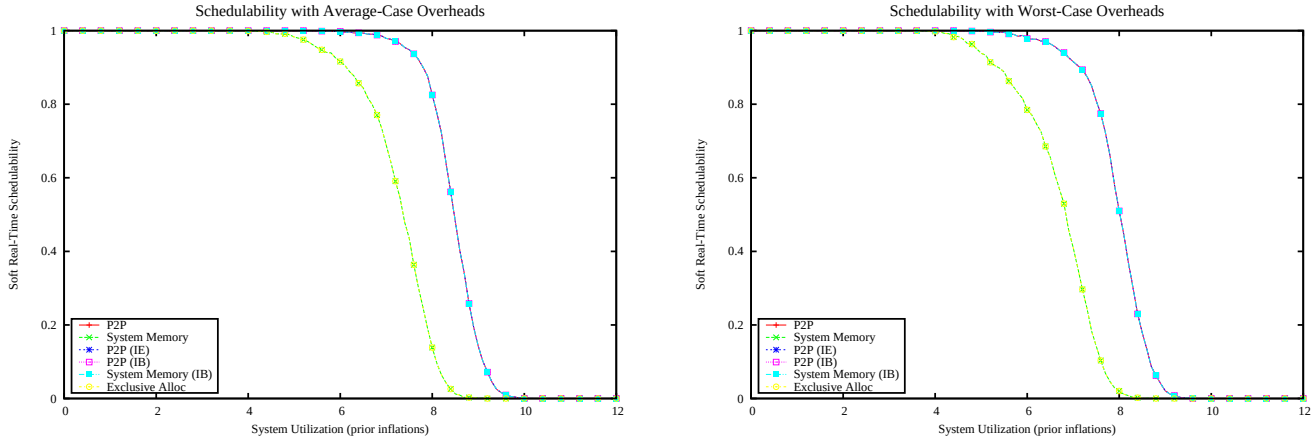

Figure 4123: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

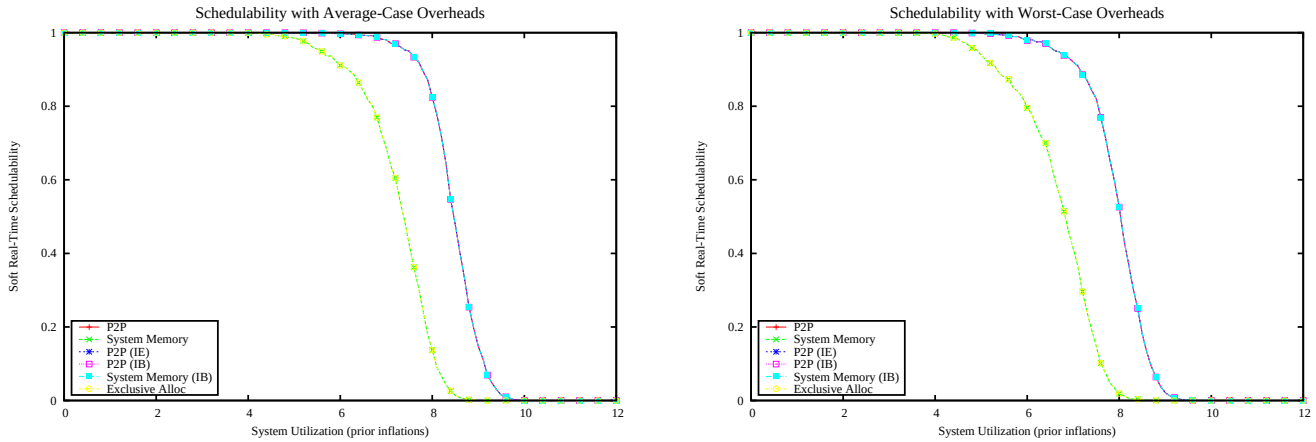

Figure 4124: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

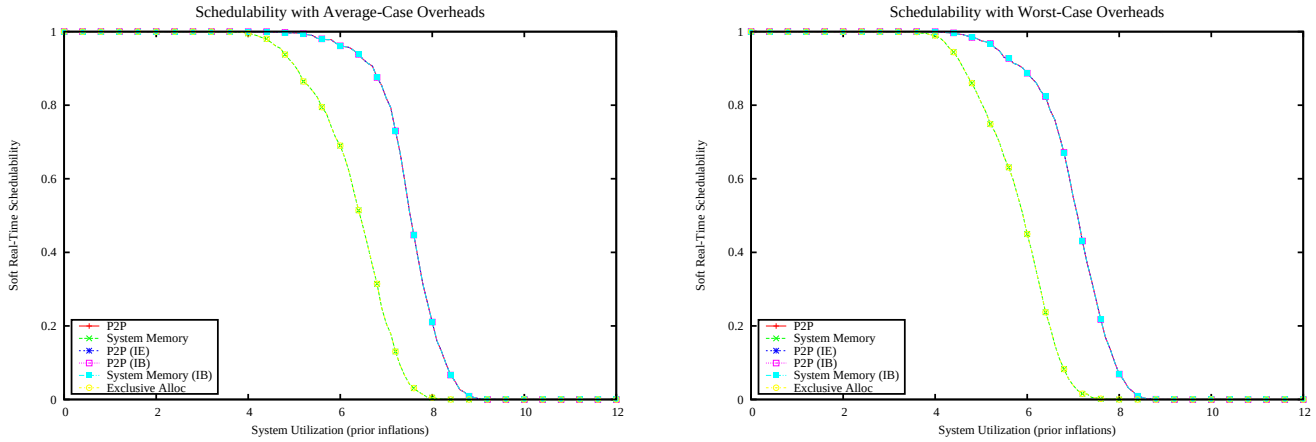

Figure 4125: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

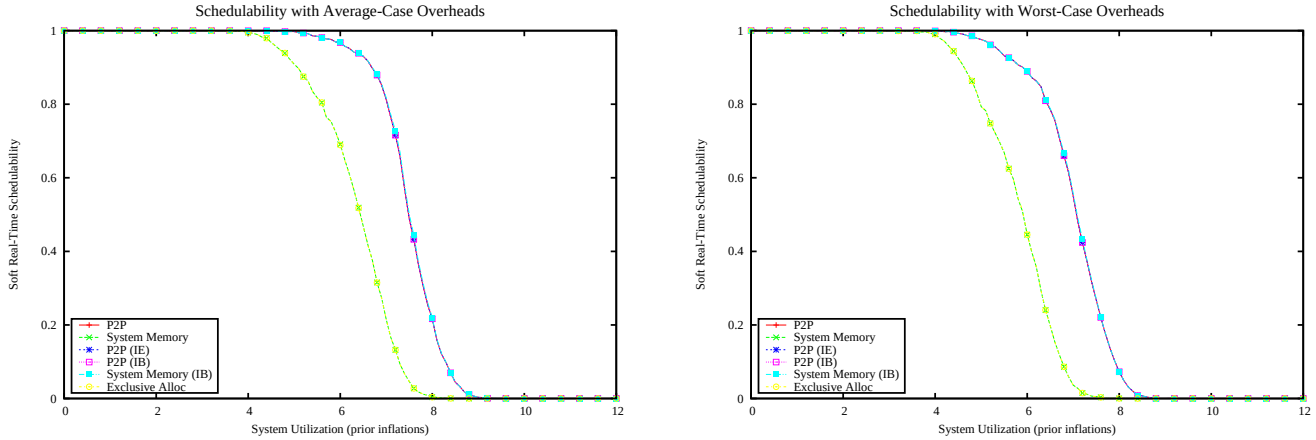

Figure 4126: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

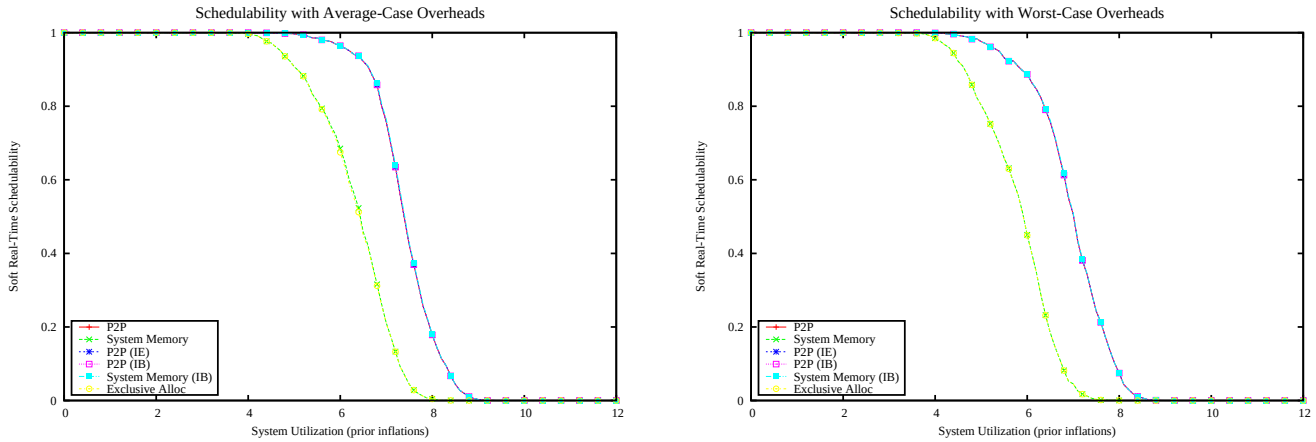

Figure 4127: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

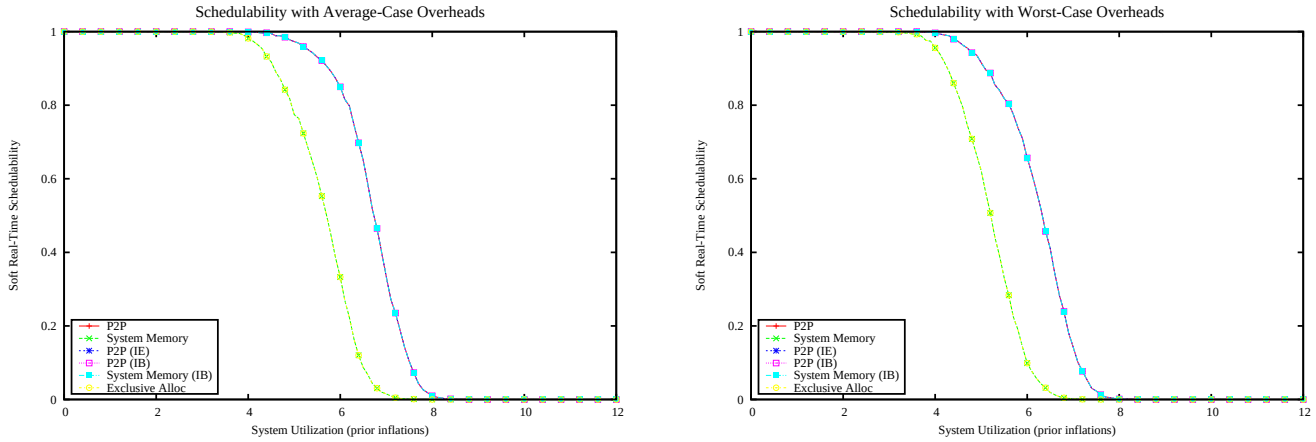

Figure 4128: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

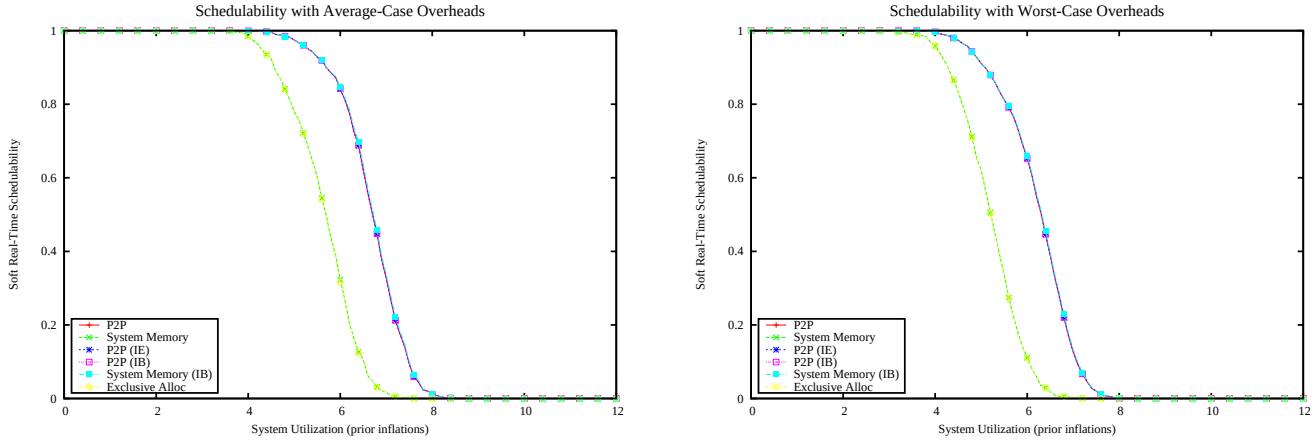

Figure 4129: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

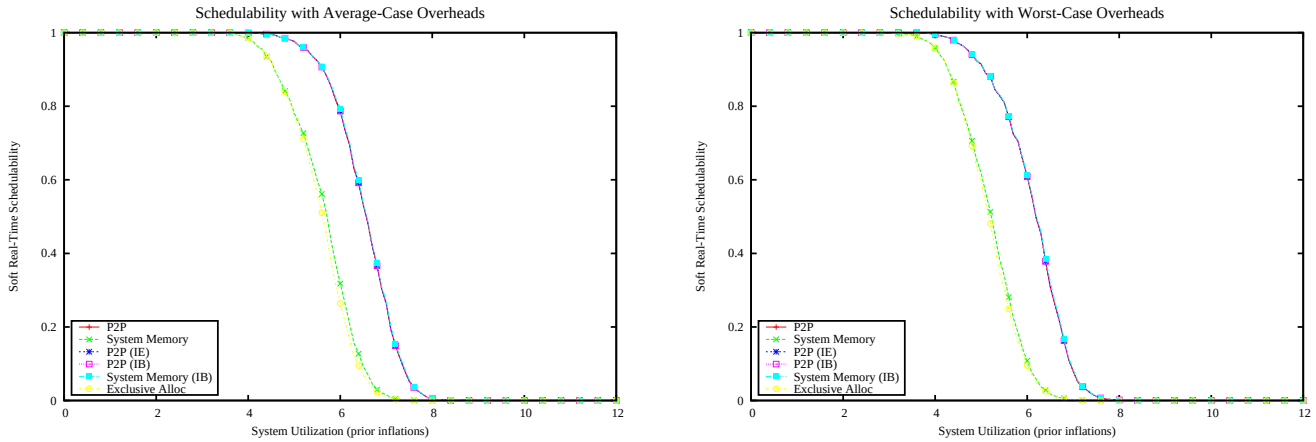

Figure 4130: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

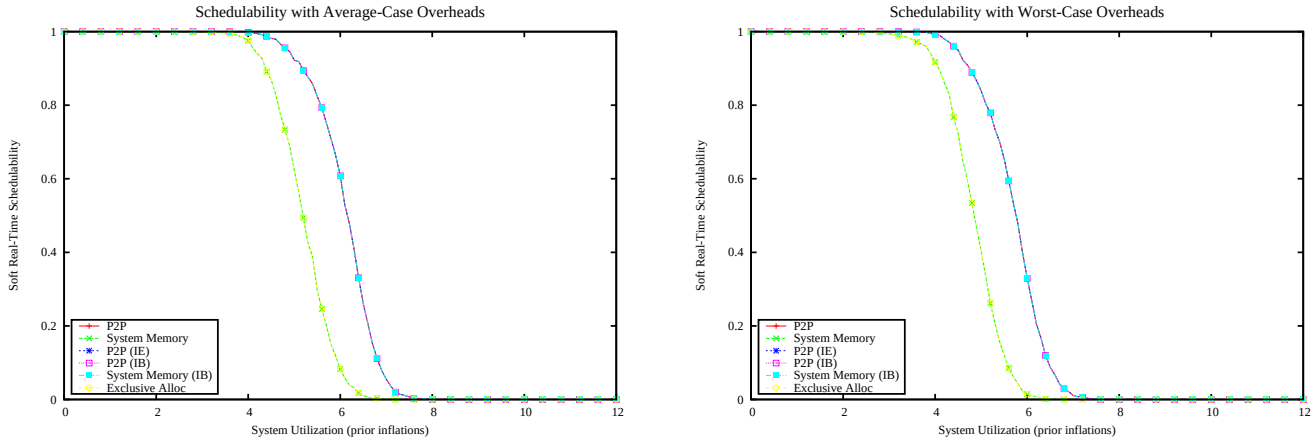

Figure 4131: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

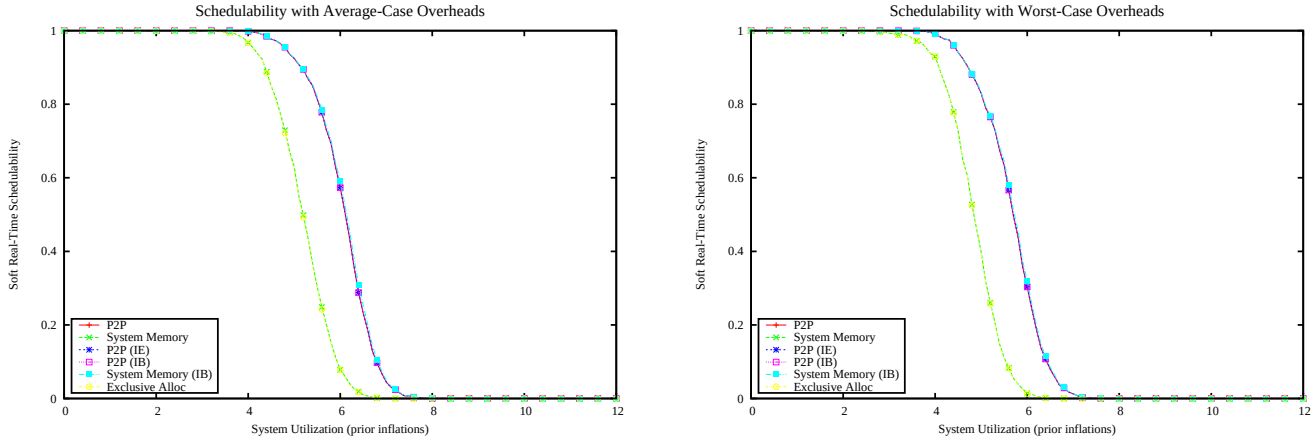

Figure 4132: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

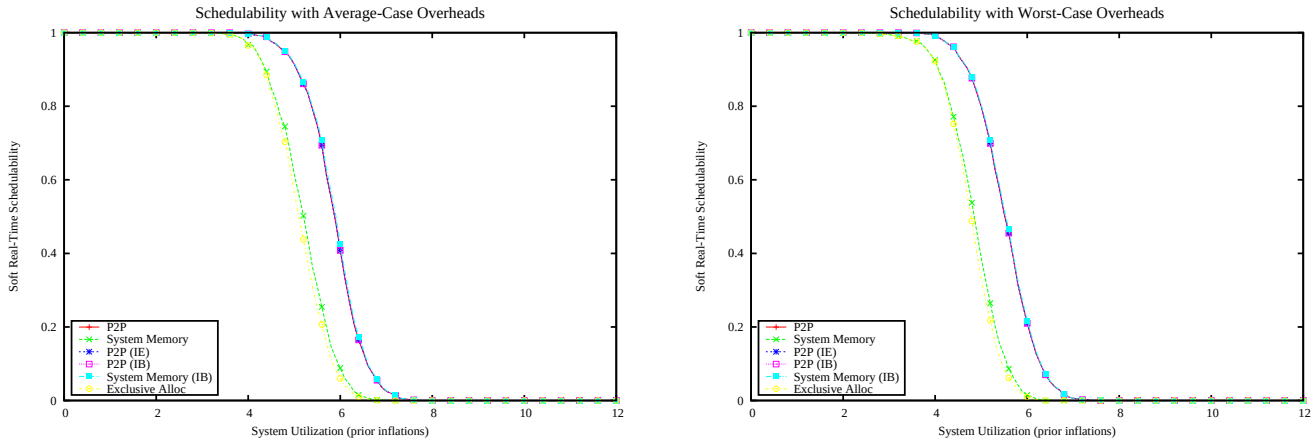

Figure 4133: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

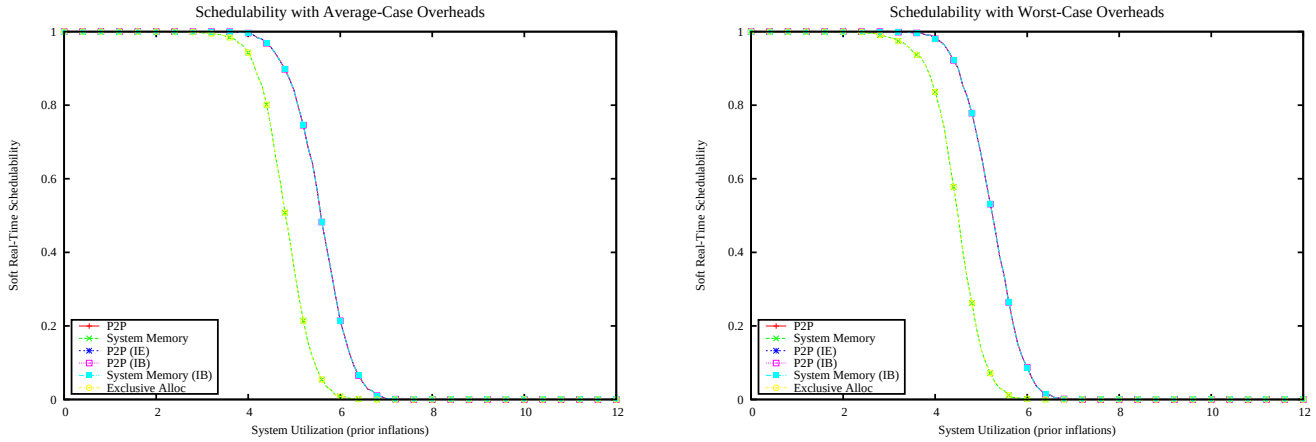

Figure 4134: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

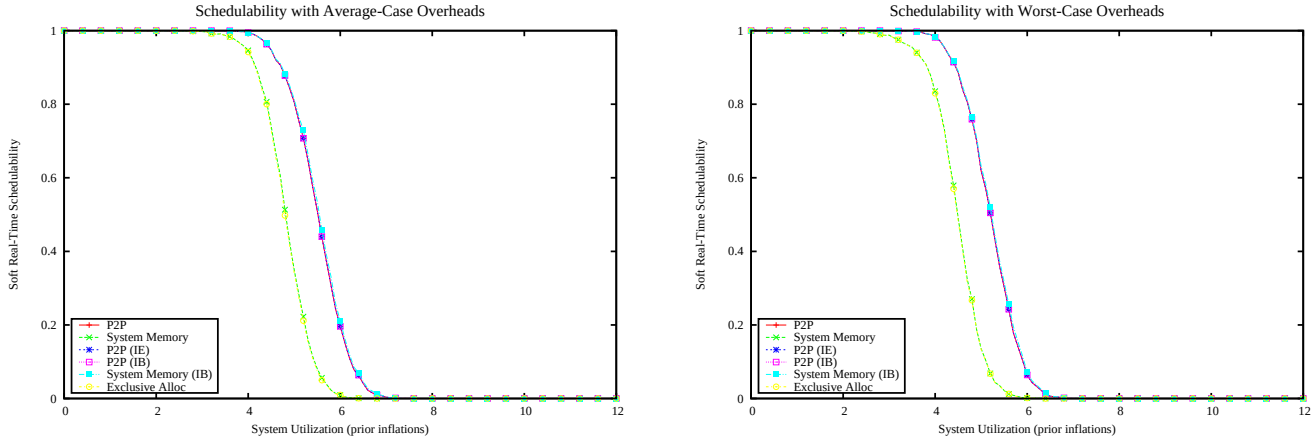

Figure 4135: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

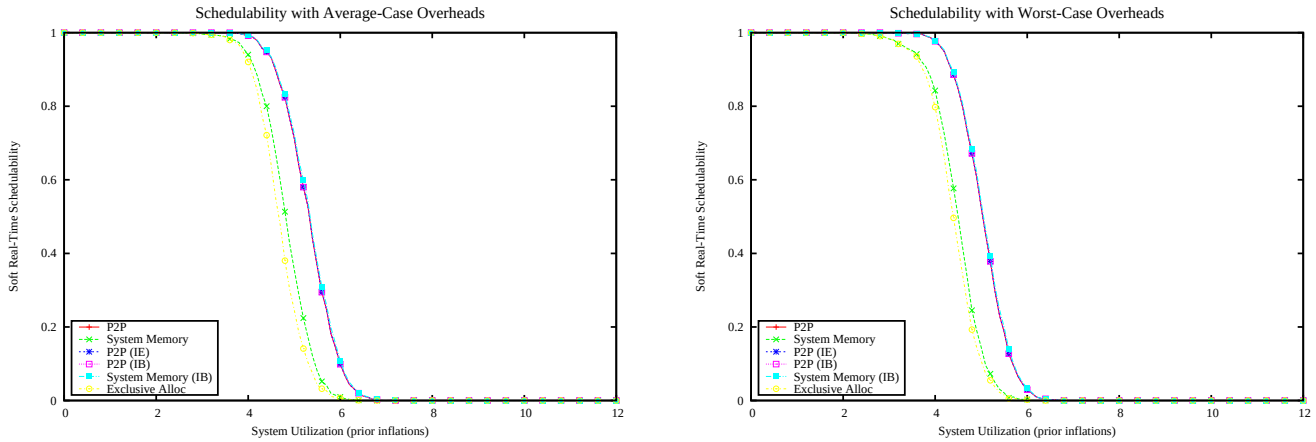

Figure 4136: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

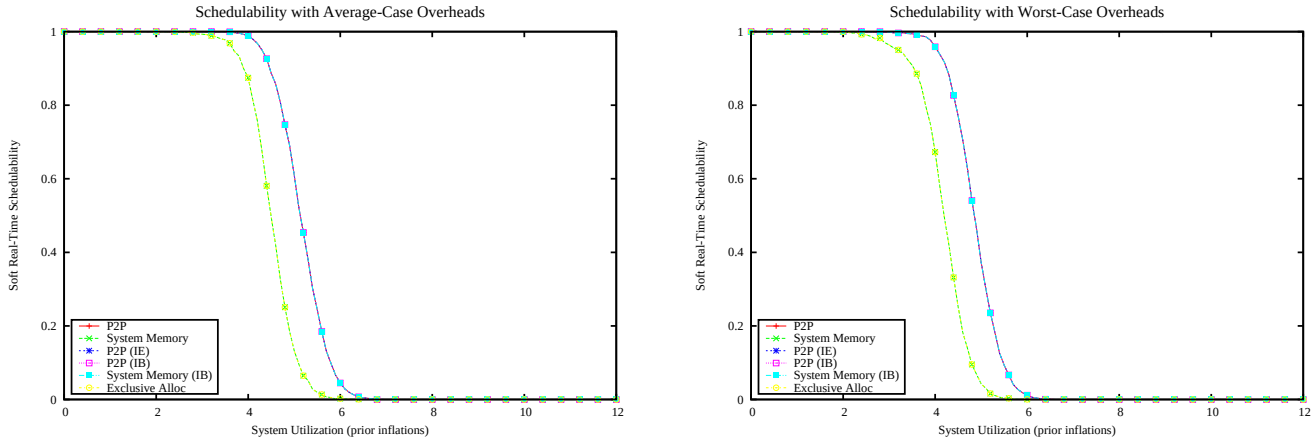

Figure 4137: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

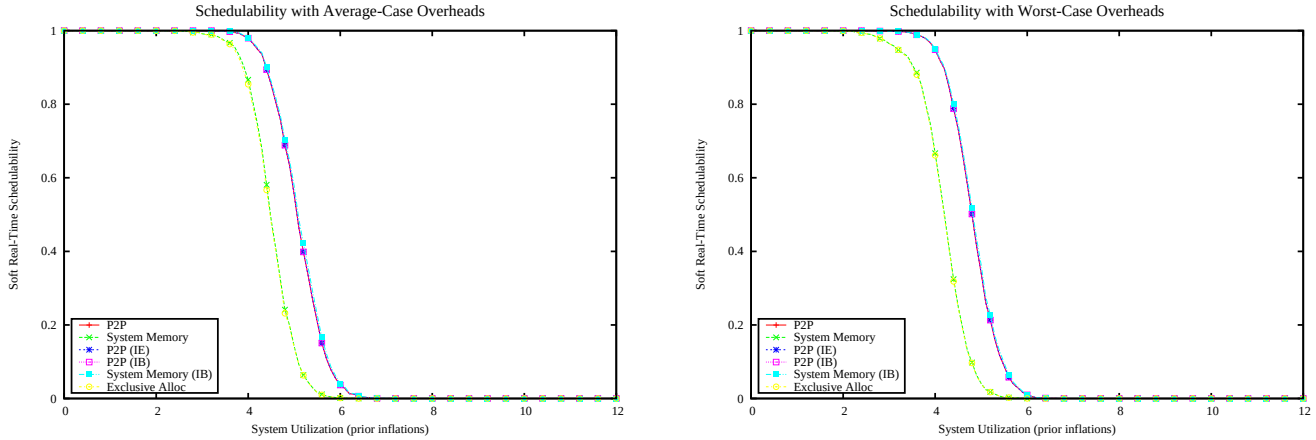

Figure 4138: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

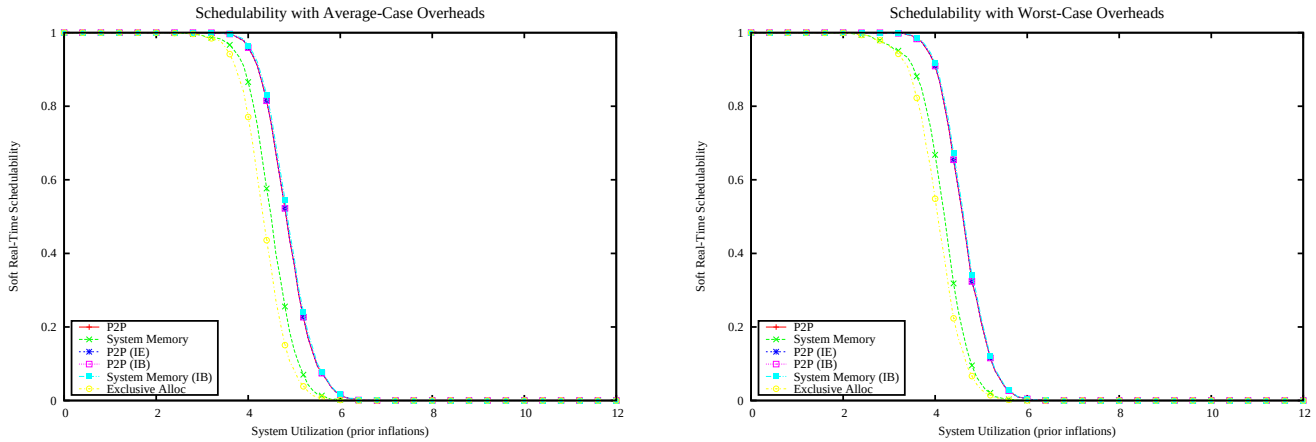

Figure 4139: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

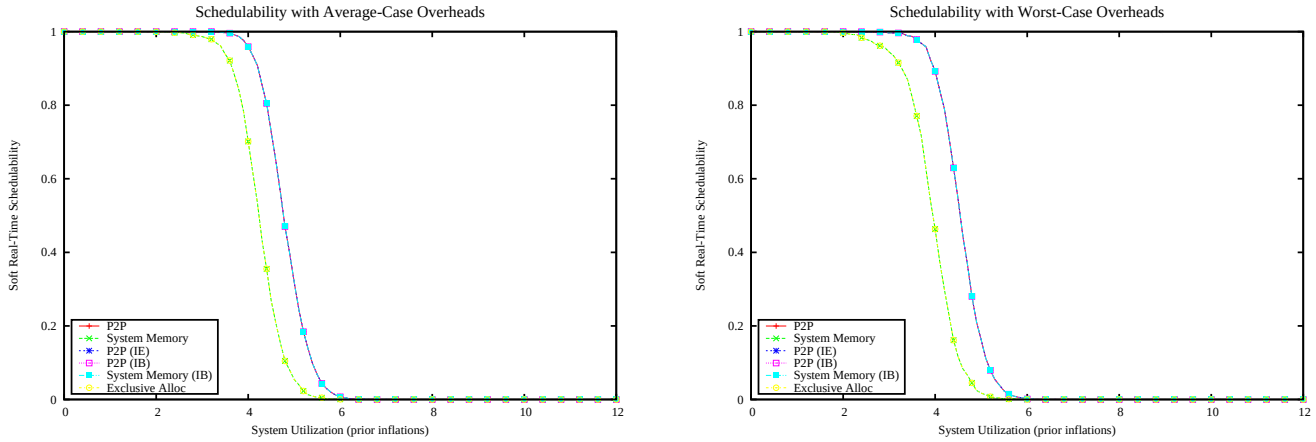

Figure 4140: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

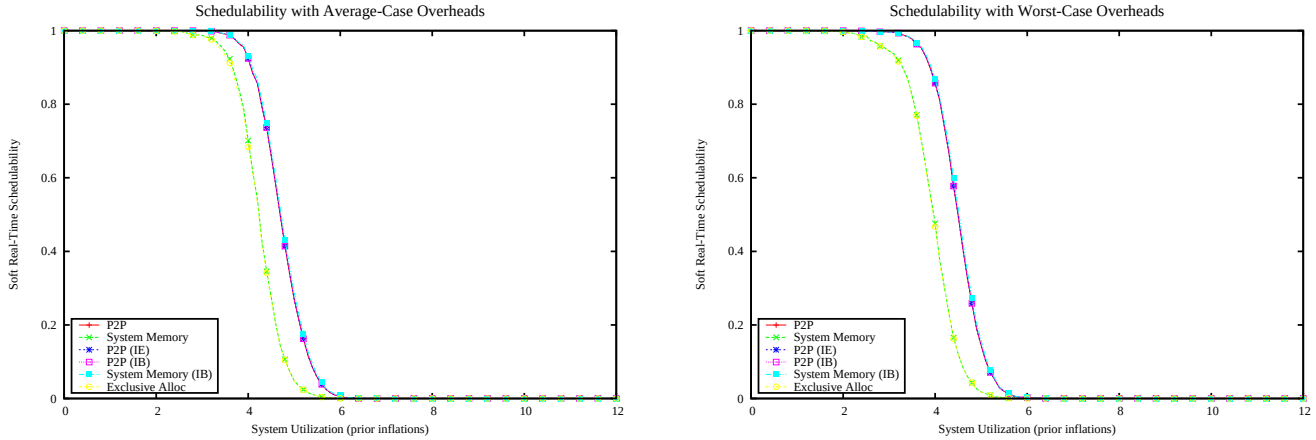

Figure 4141: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

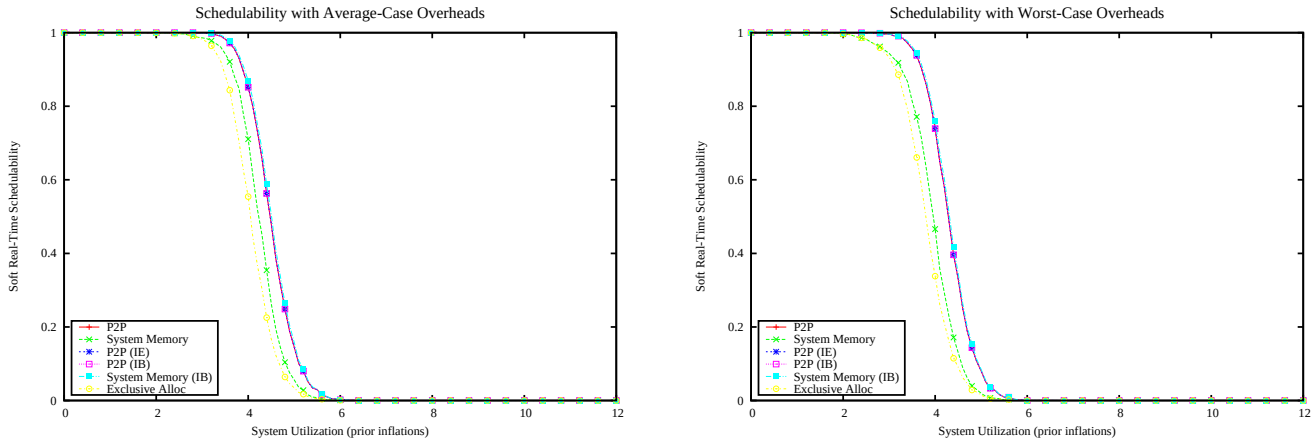

Figure 4142: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

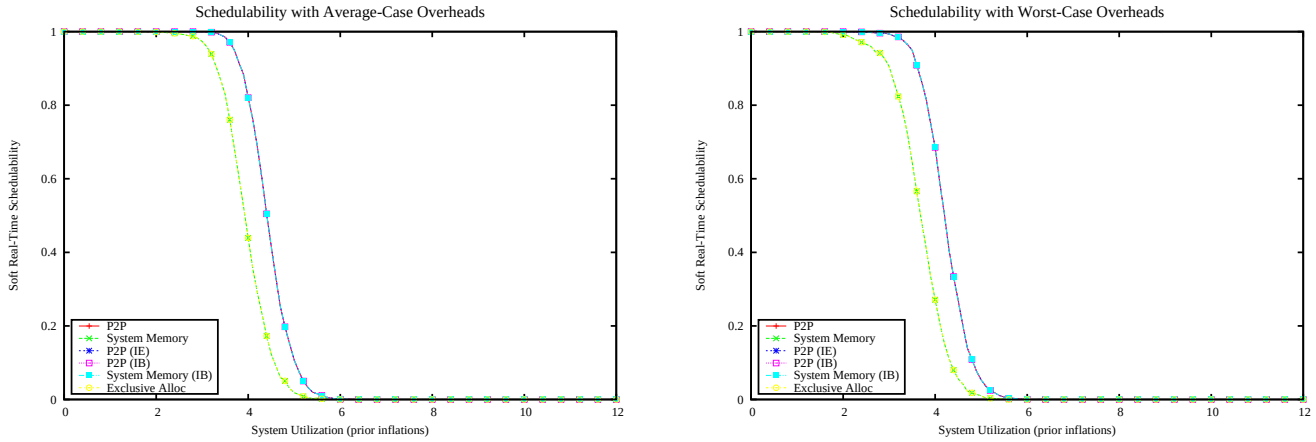

Figure 4143: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

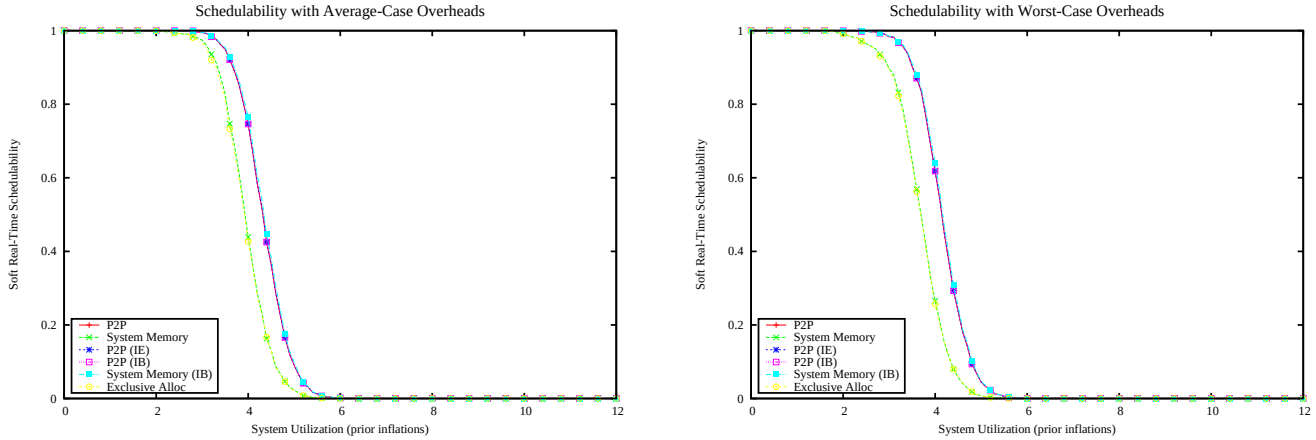

Figure 4144: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

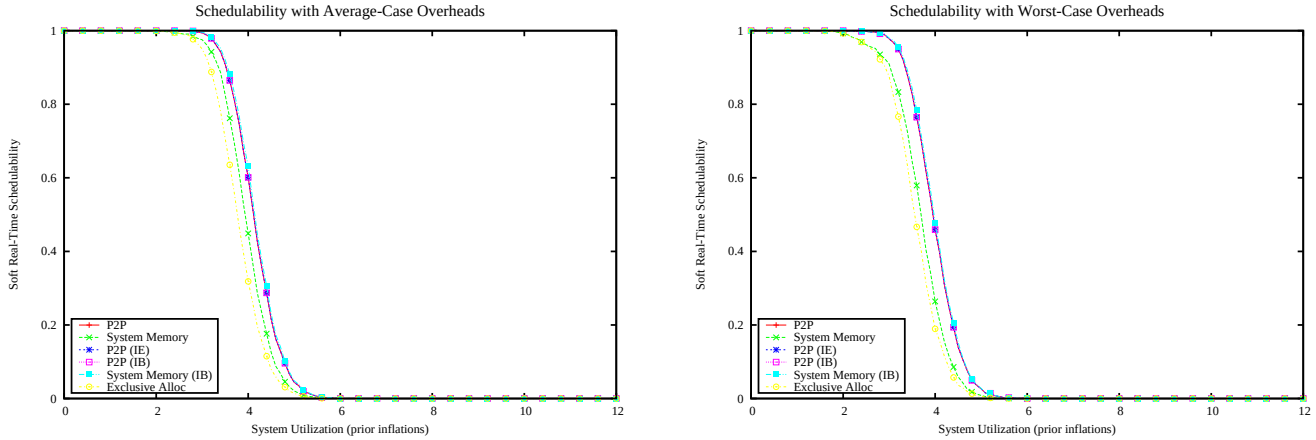

Figure 4145: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

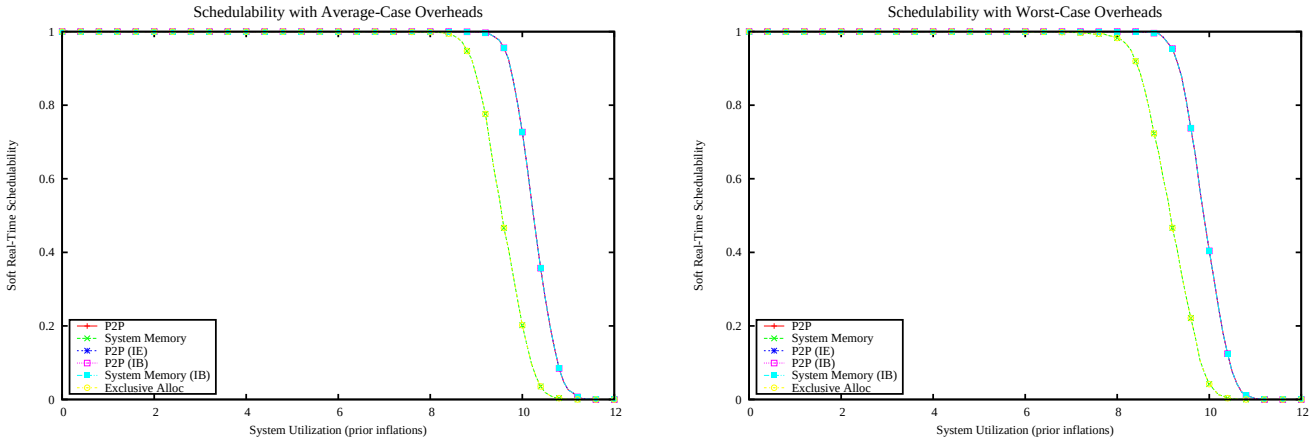

Figure 4146: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

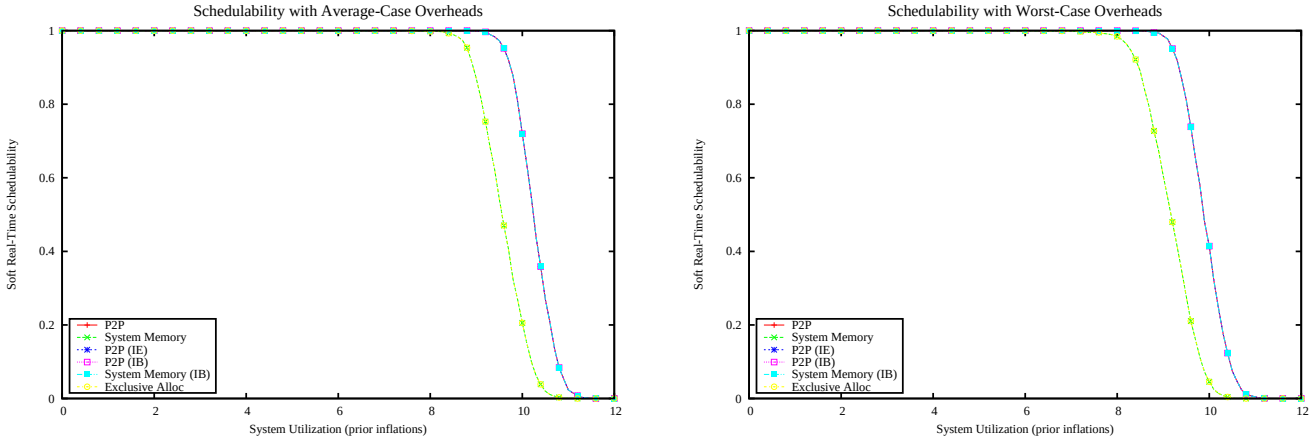

Figure 4147: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

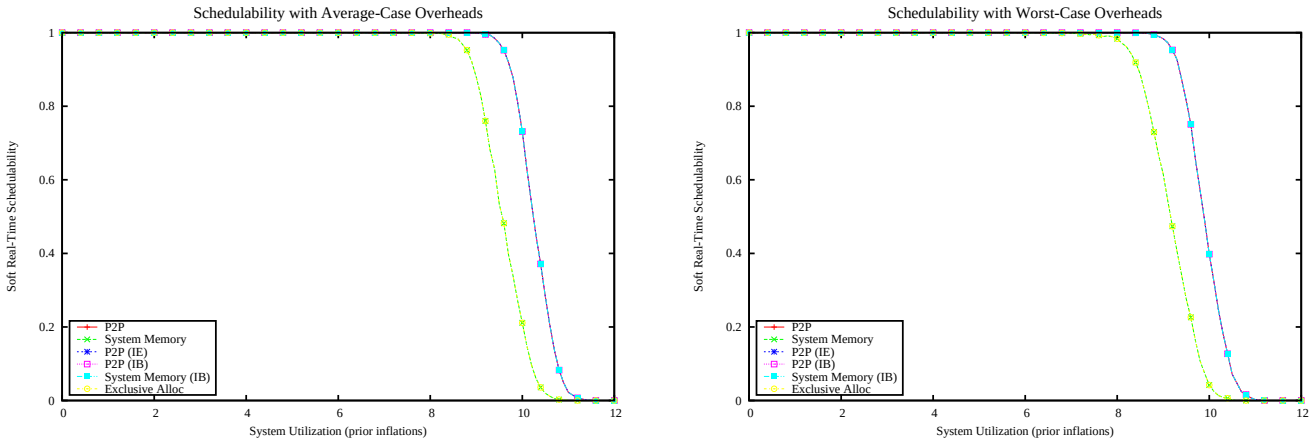

Figure 4148: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

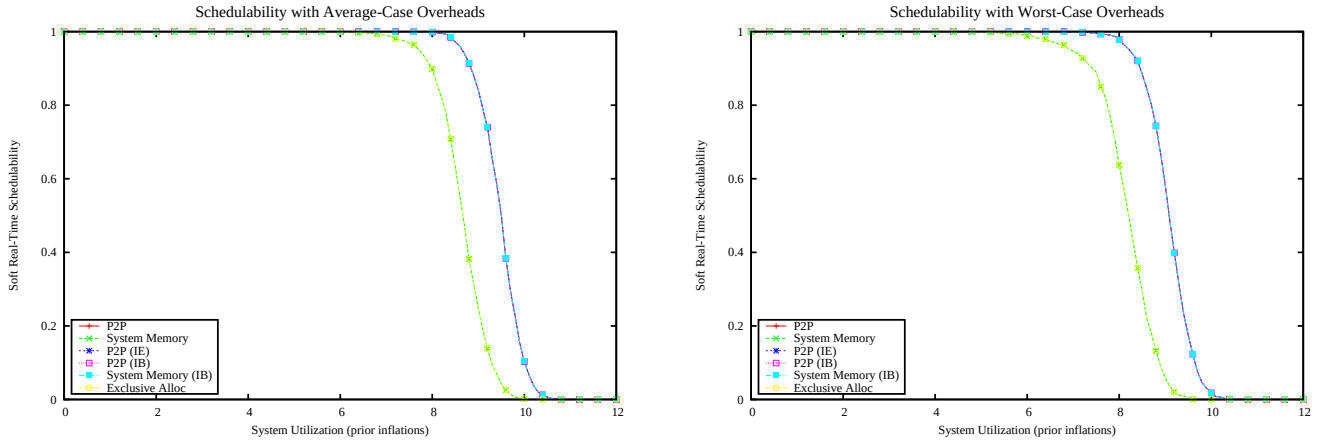

Figure 4149: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

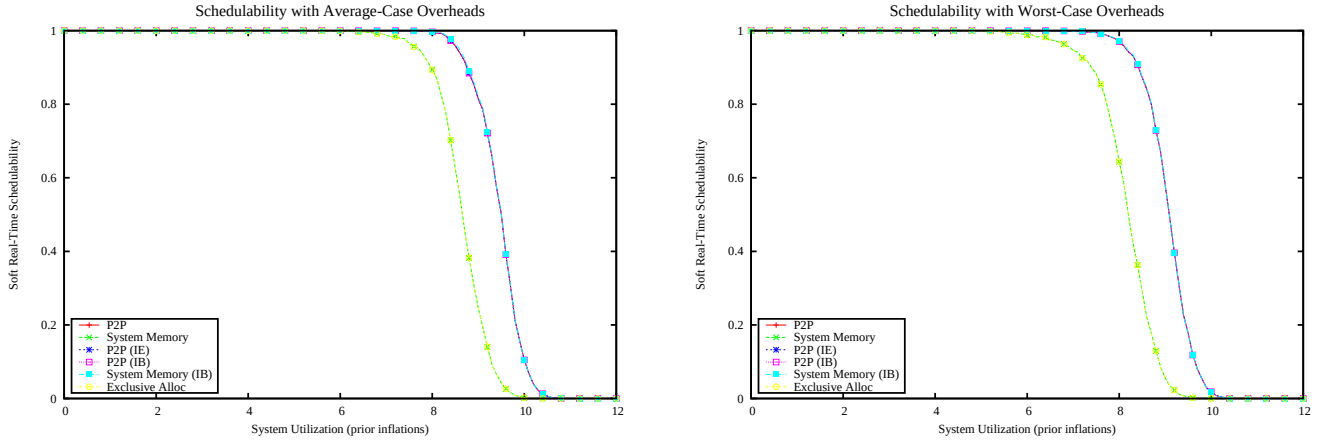

Figure 4150: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

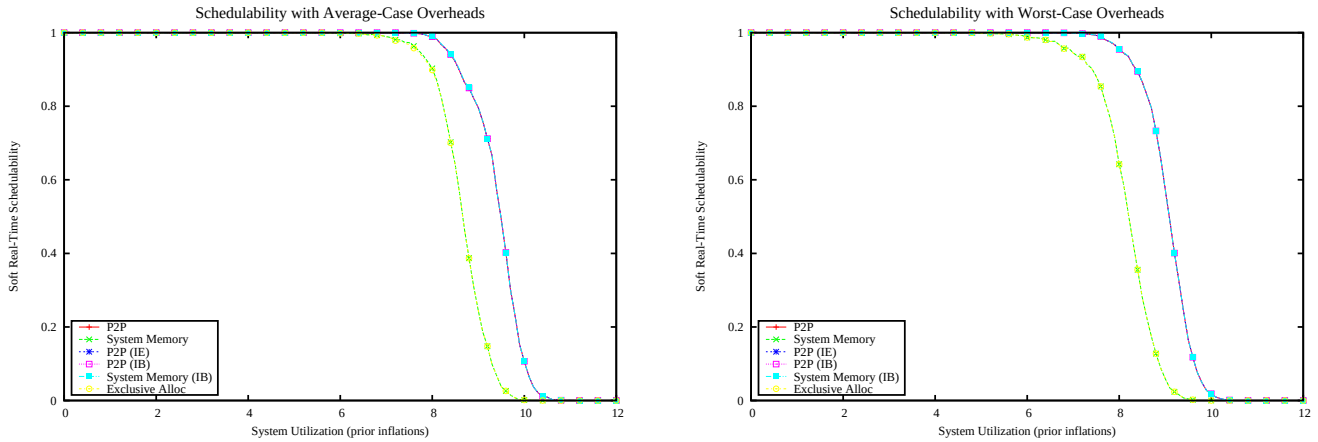

Figure 4151: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

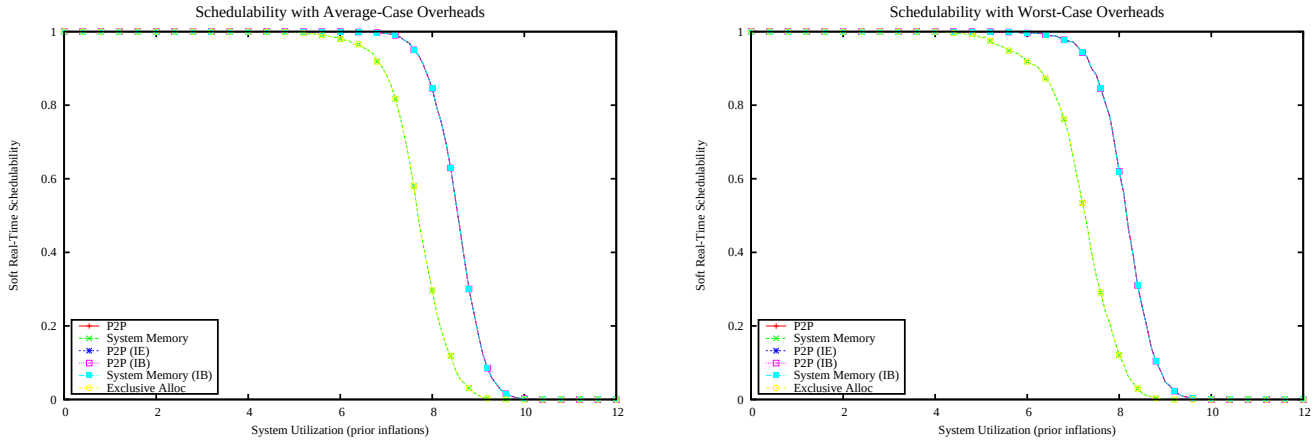

Figure 4152: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

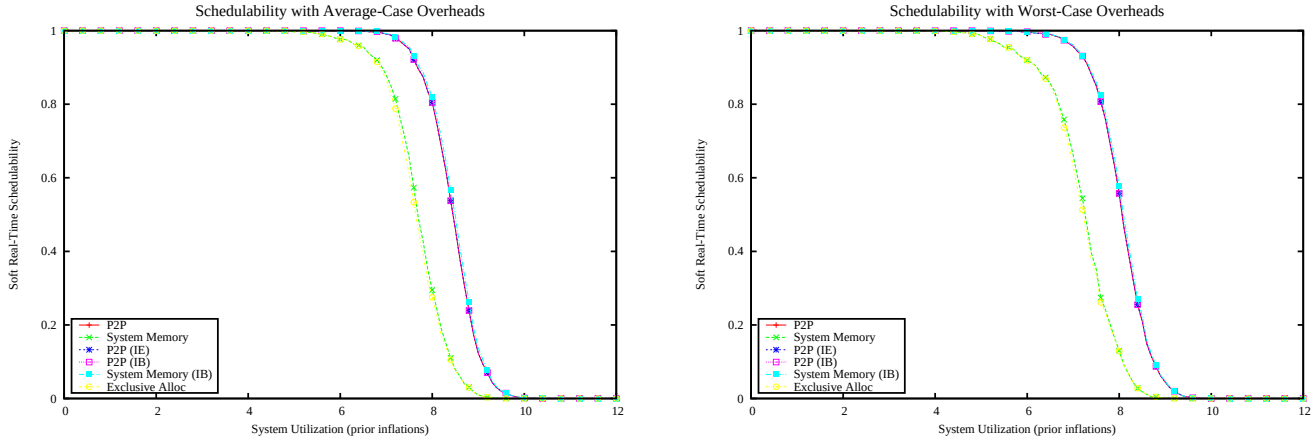

Figure 4153: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

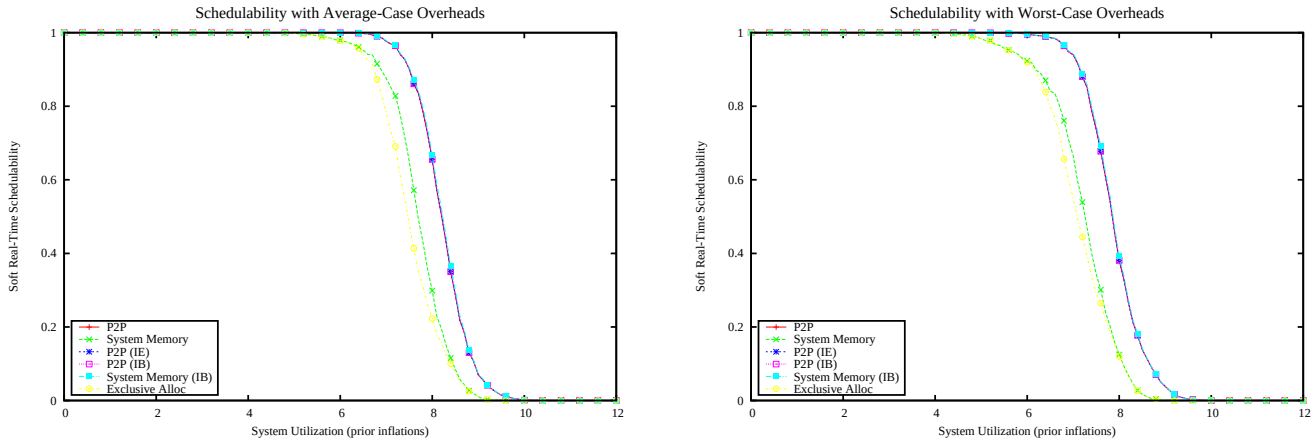

Figure 4154: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

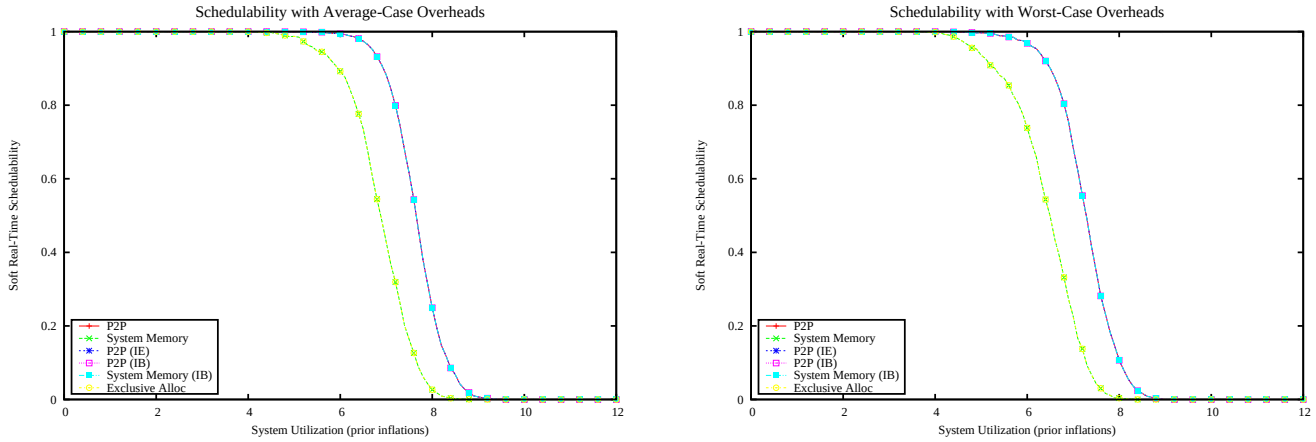

Figure 4155: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

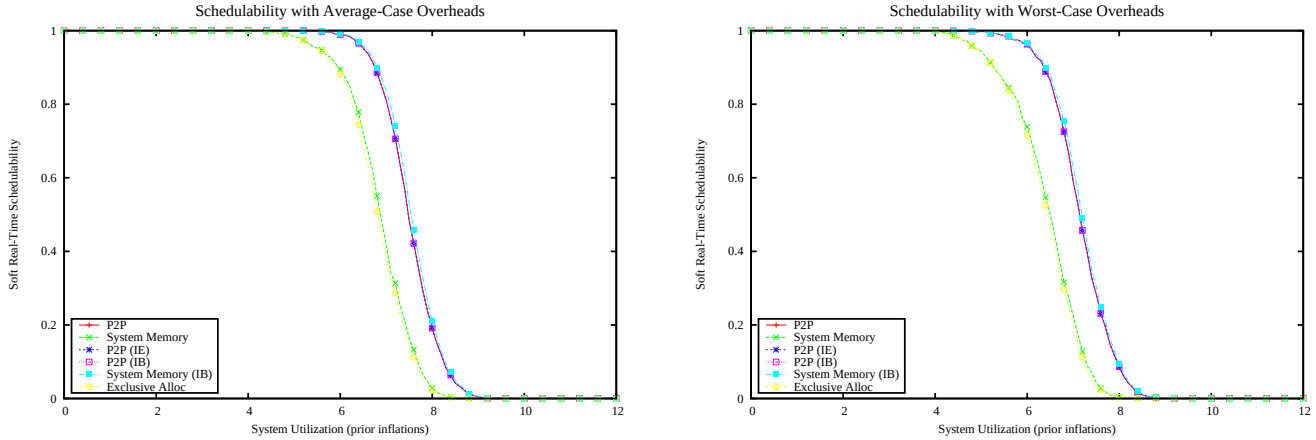

Figure 4156: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

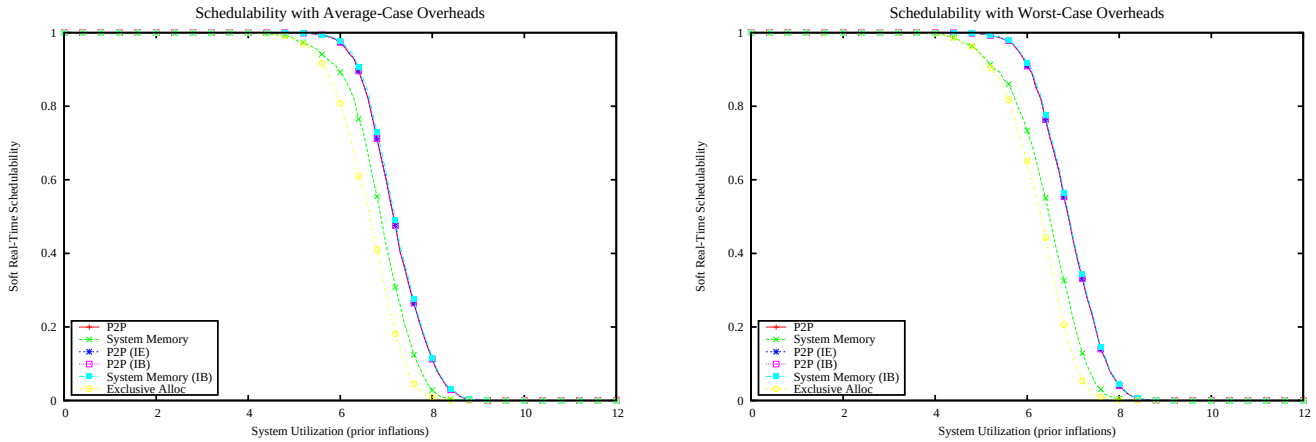

Figure 4157: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

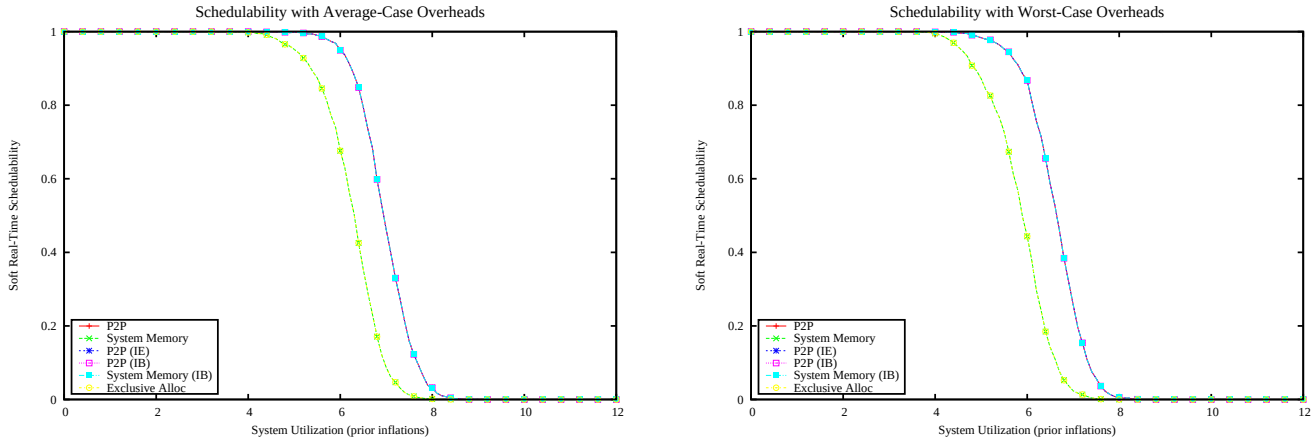

Figure 4158: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

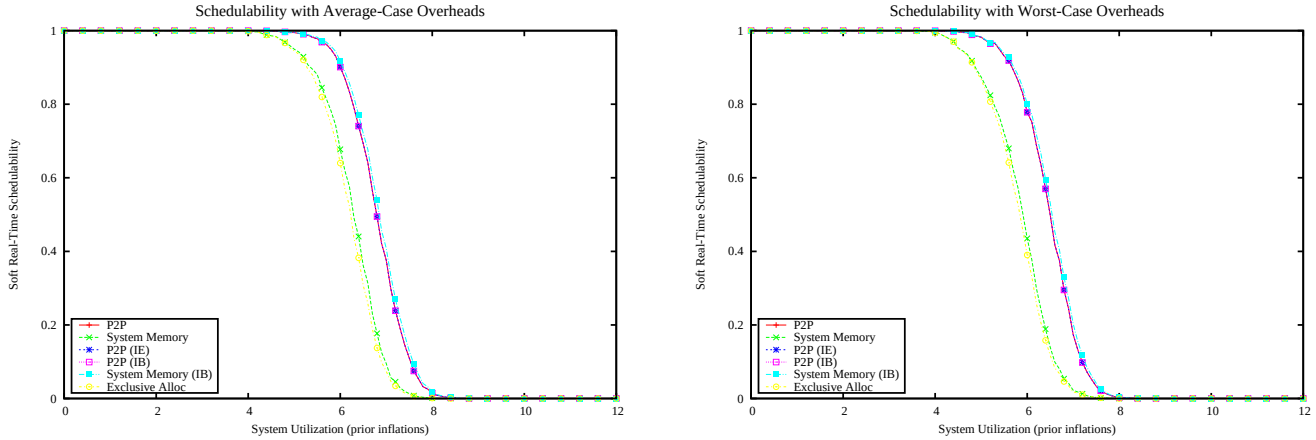

Figure 4159: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

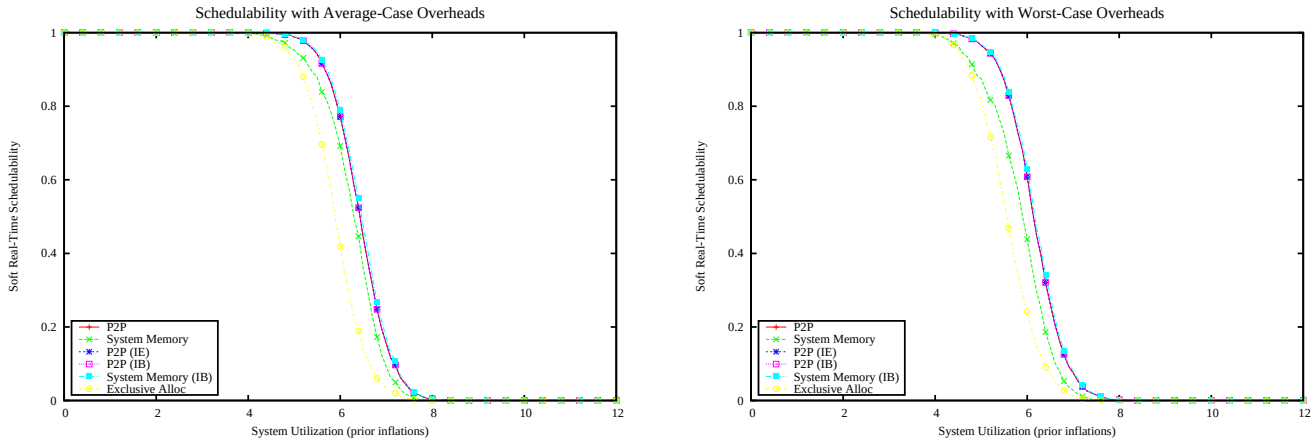

Figure 4160: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

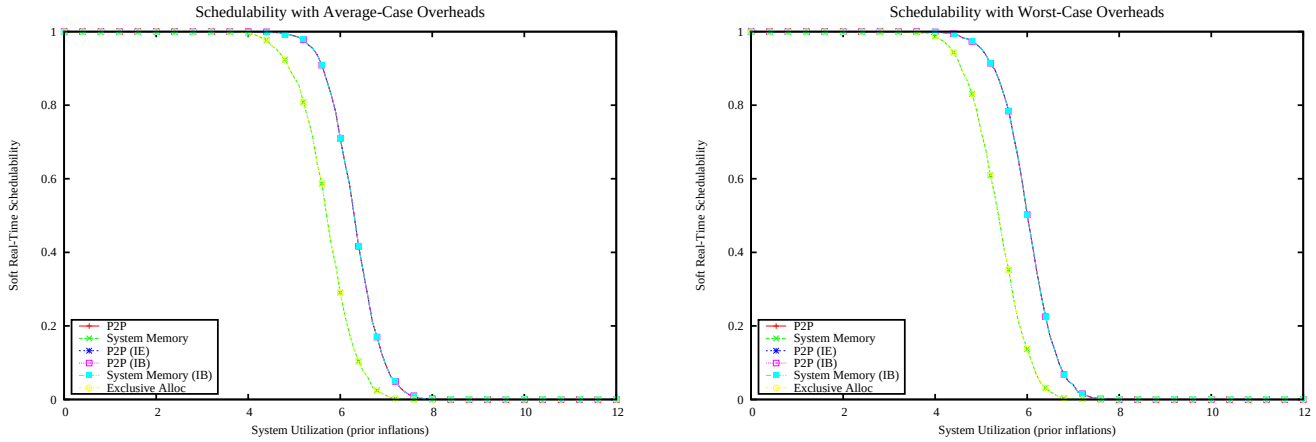

Figure 4161: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

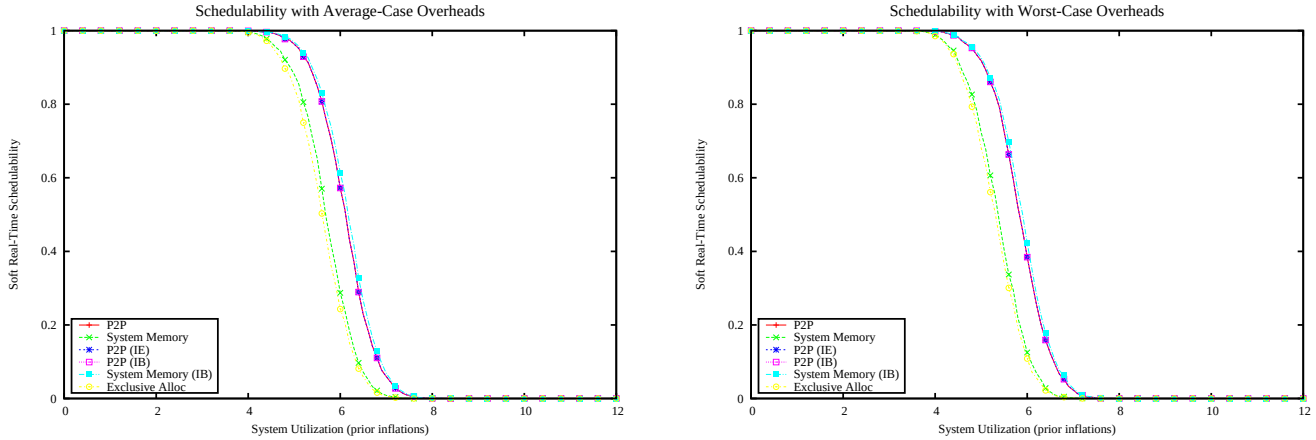

Figure 4162: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

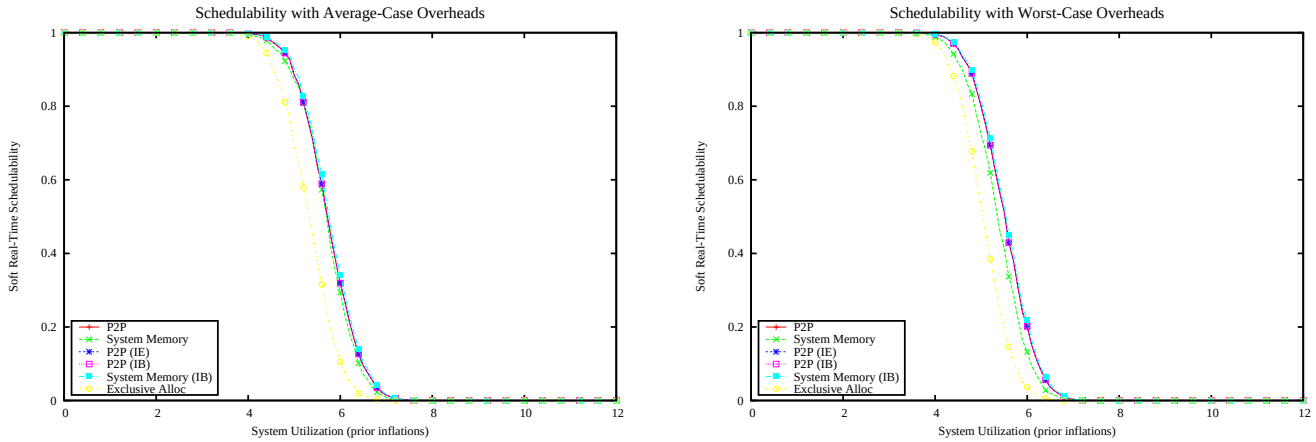

Figure 4163: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

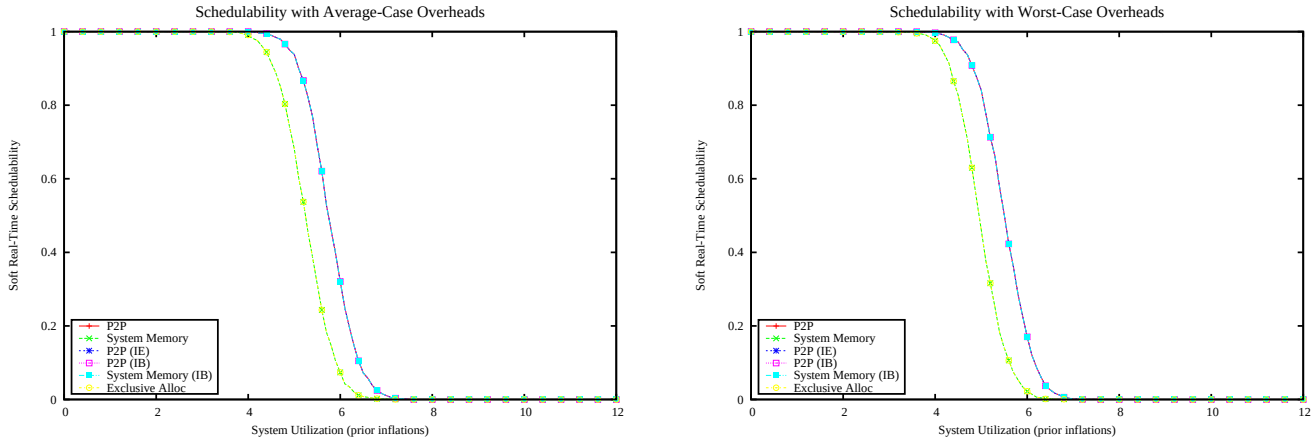

Figure 4164: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

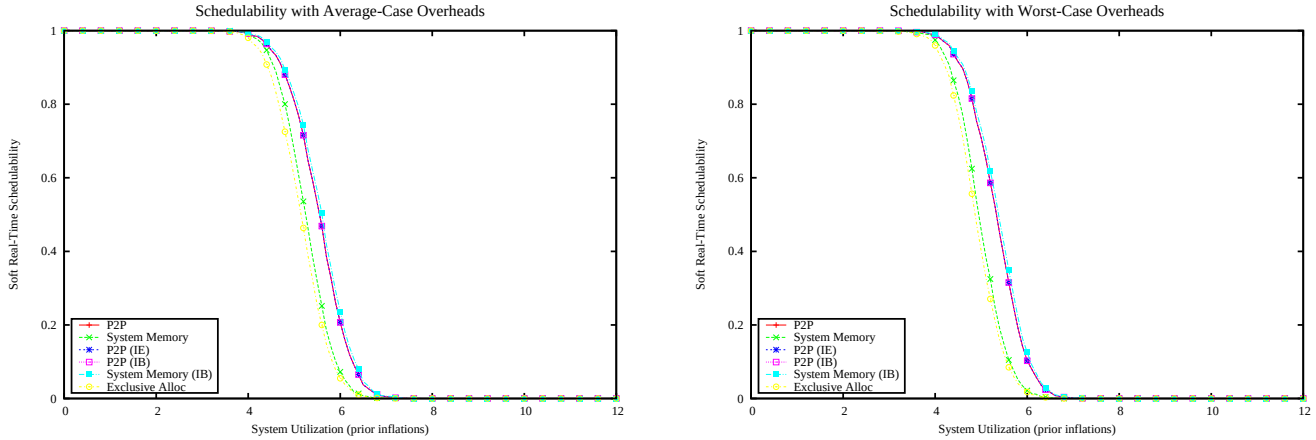

Figure 4165: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

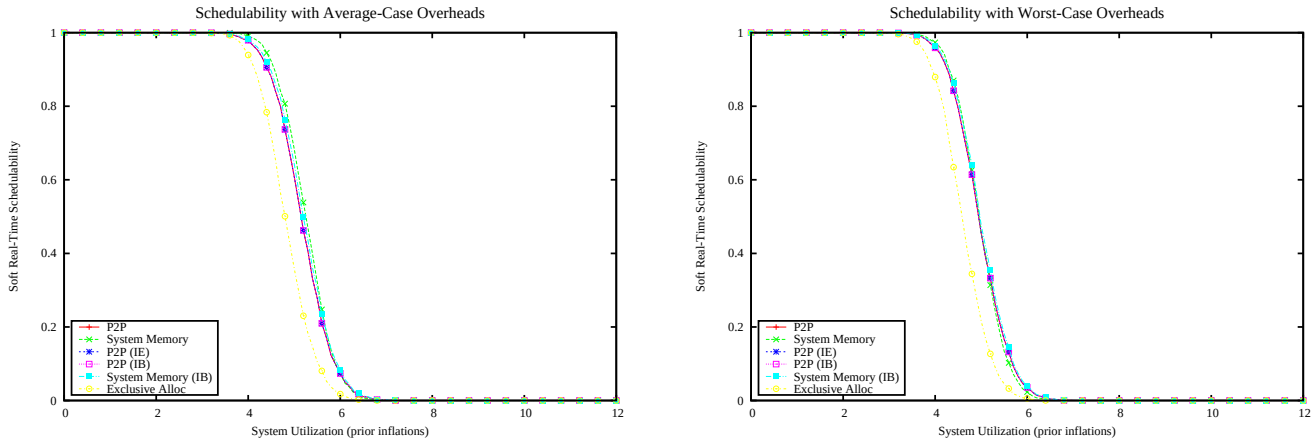

Figure 4166: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

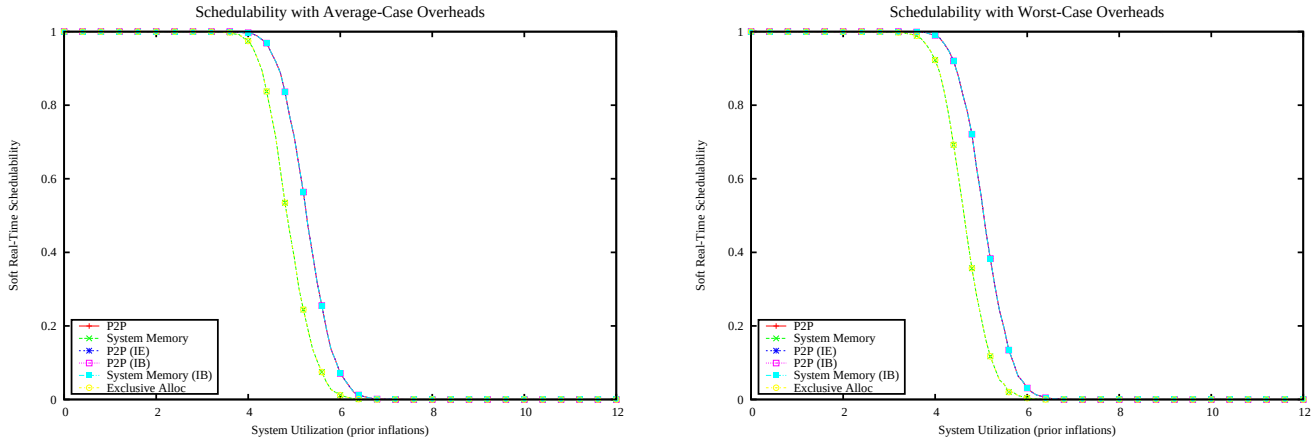

Figure 4167: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

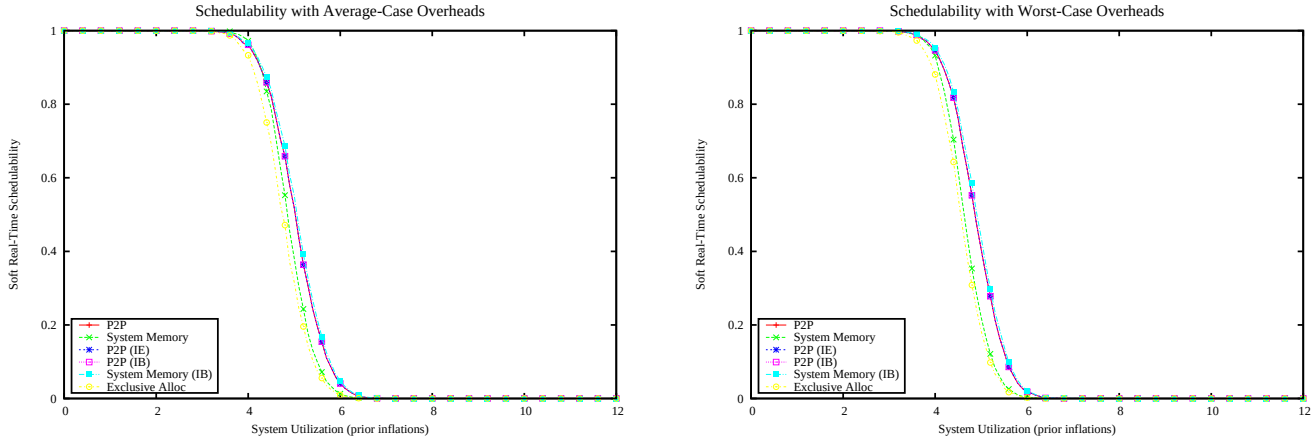

Figure 4168: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

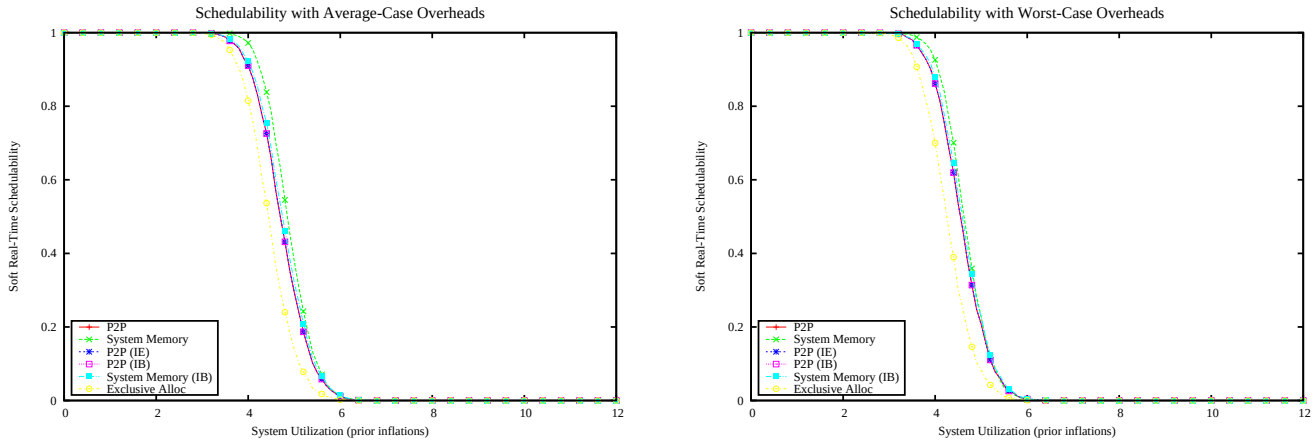

Figure 4169: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

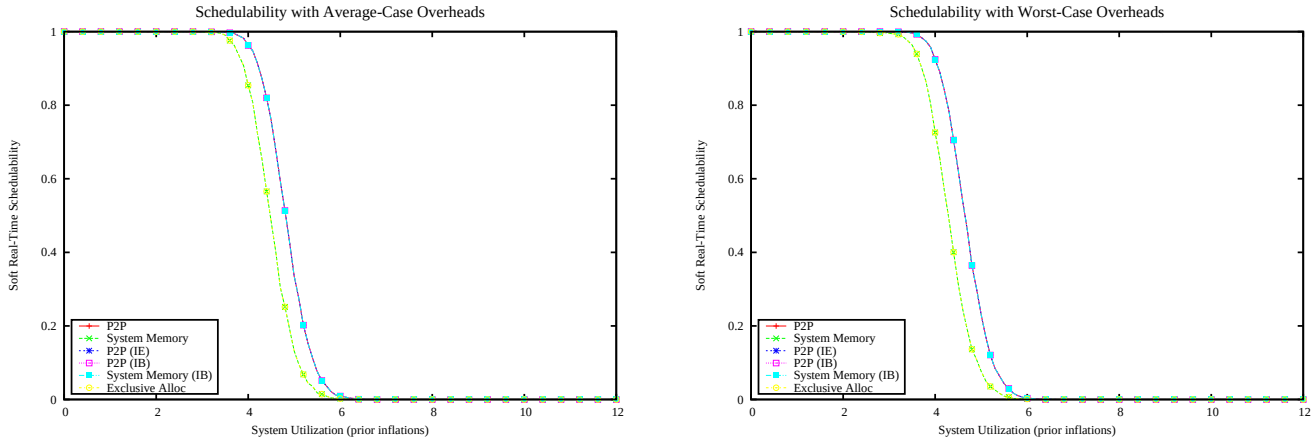

Figure 4170: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

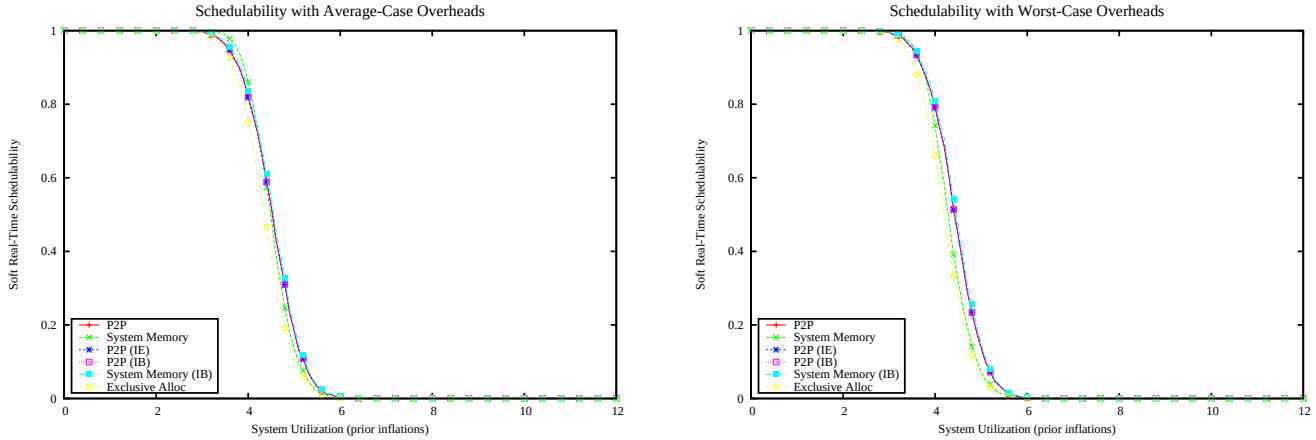

Figure 4171: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

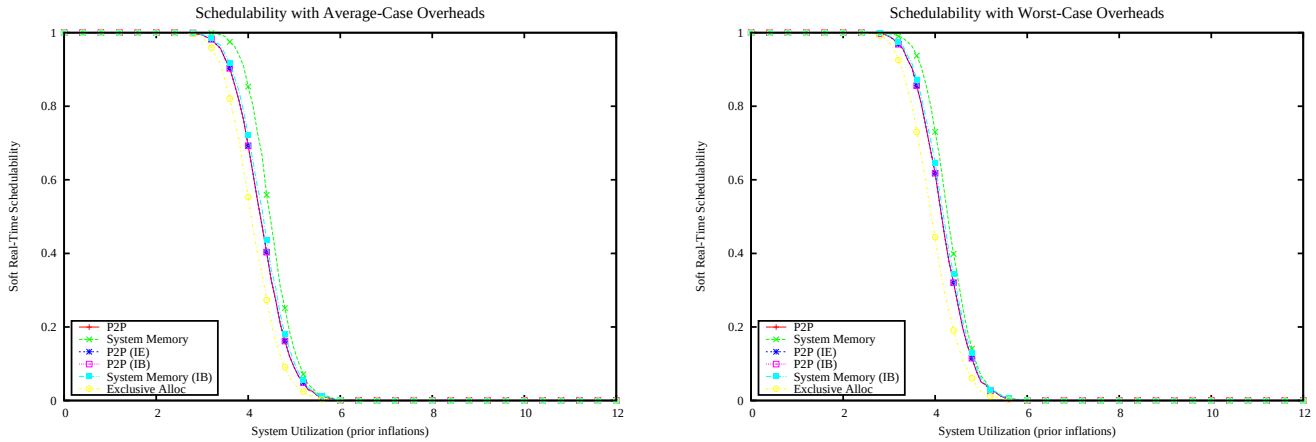

Figure 4172: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

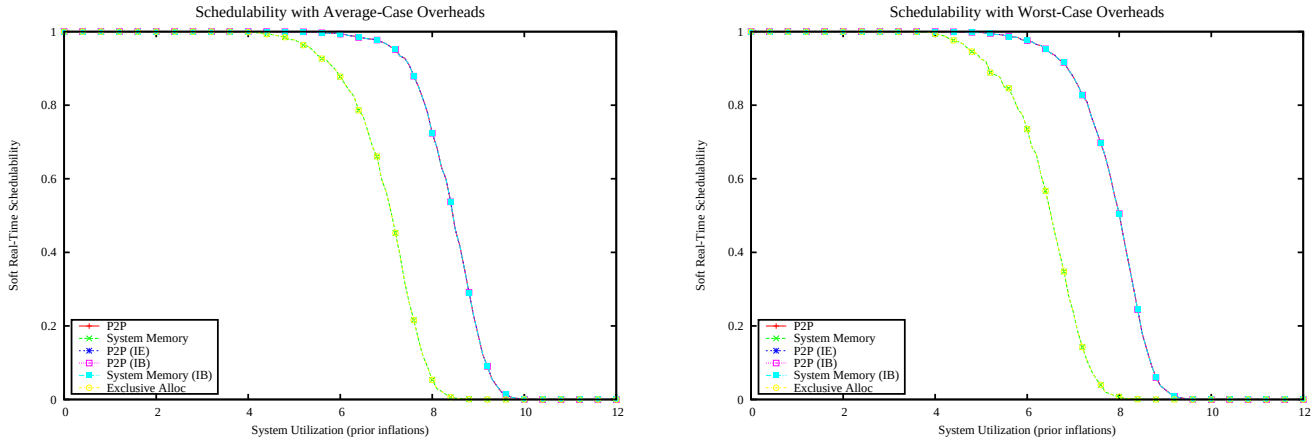

Figure 4173: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

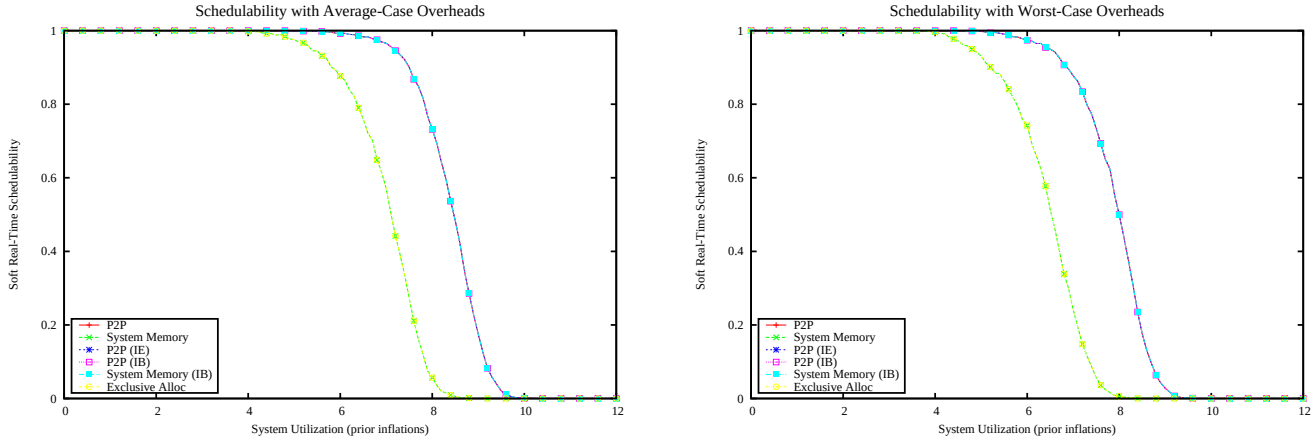

Figure 4174: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

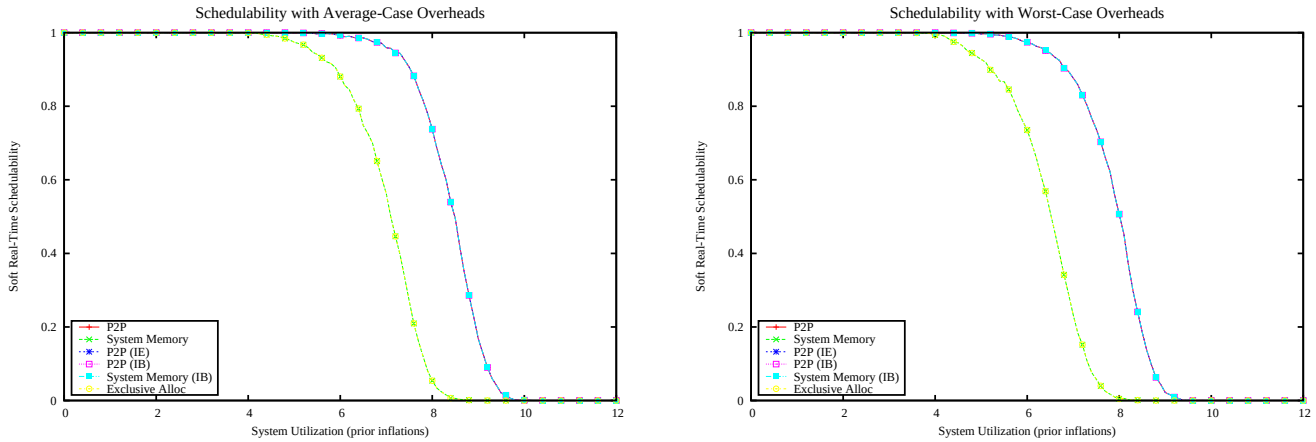

Figure 4175: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

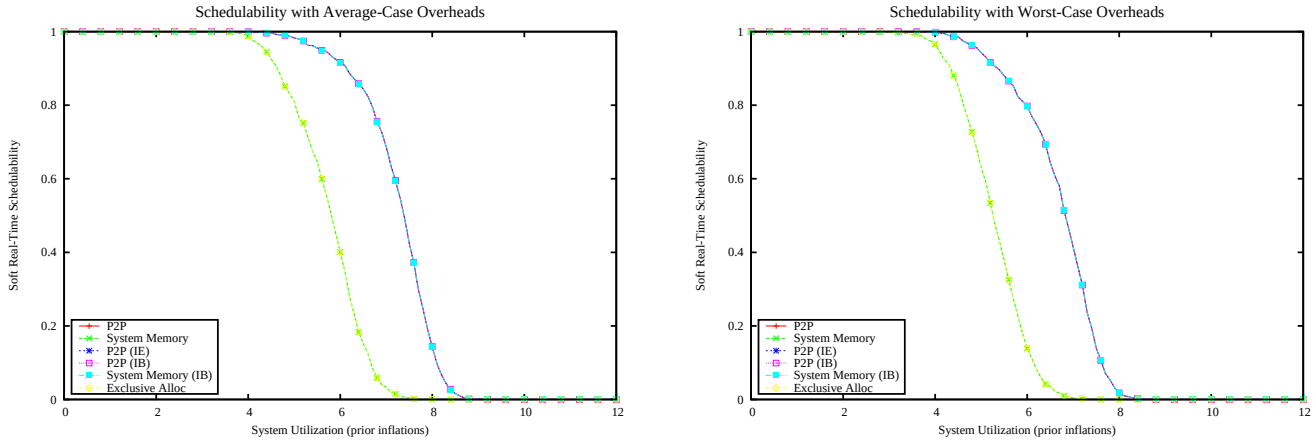

Figure 4176: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

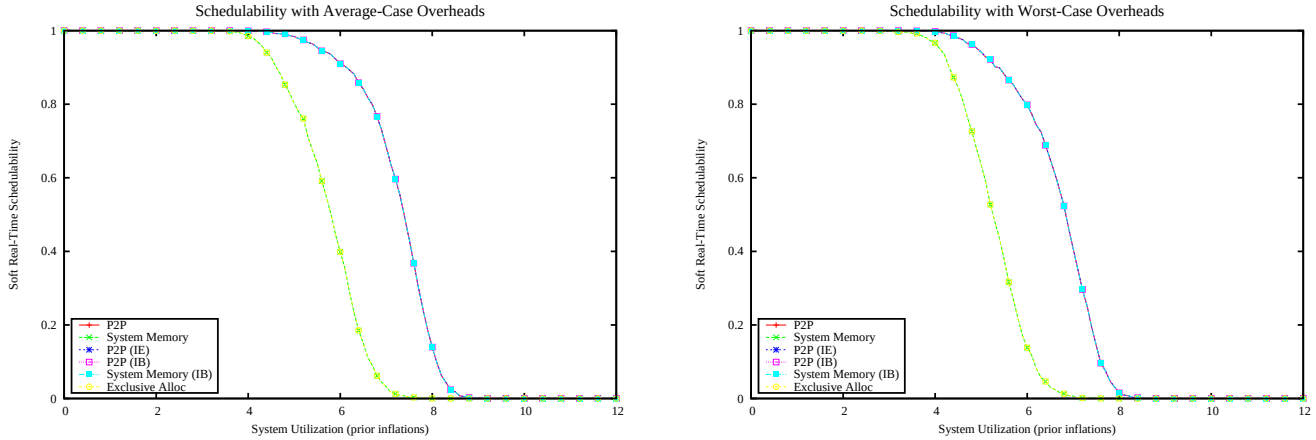

Figure 4177: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

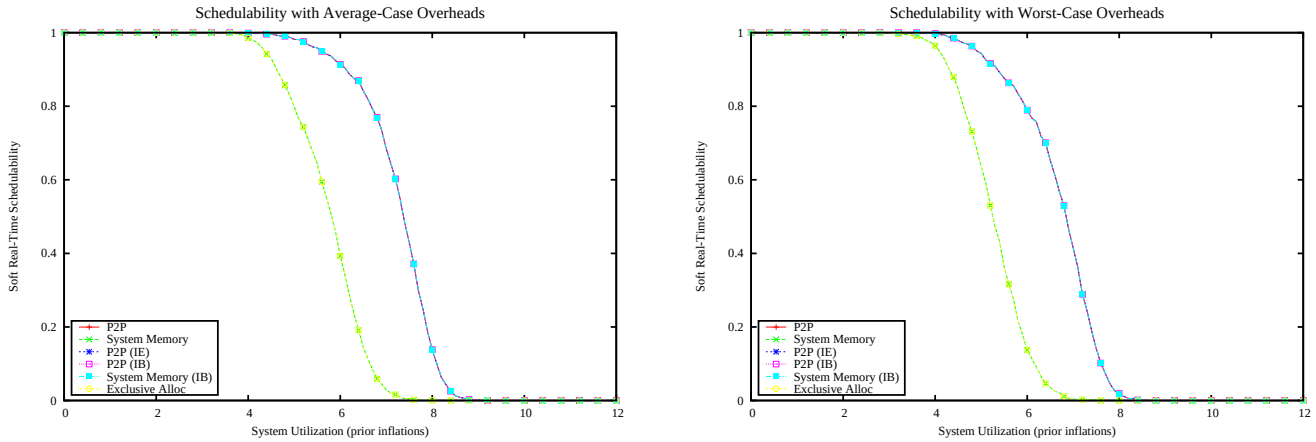

Figure 4178: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

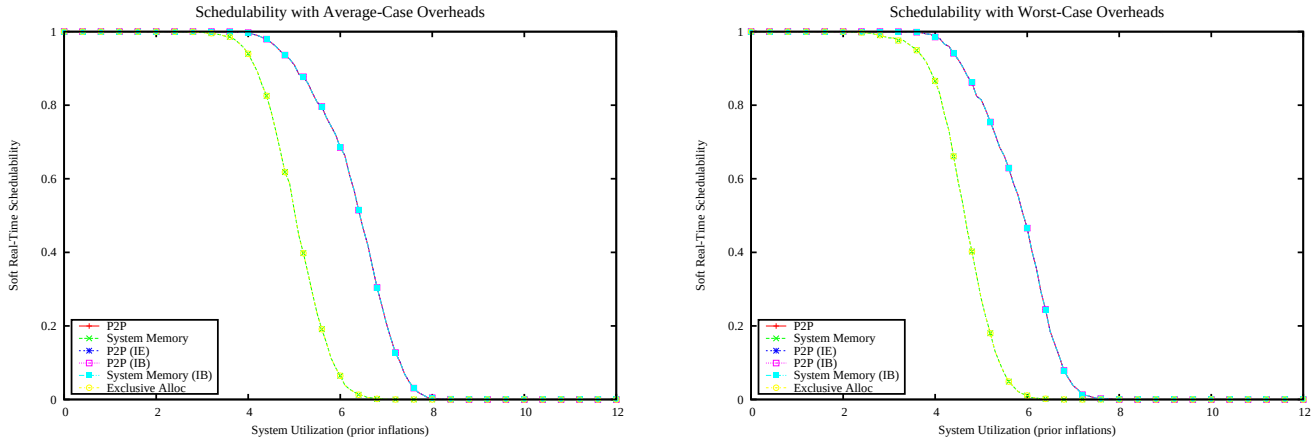

Figure 4179: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

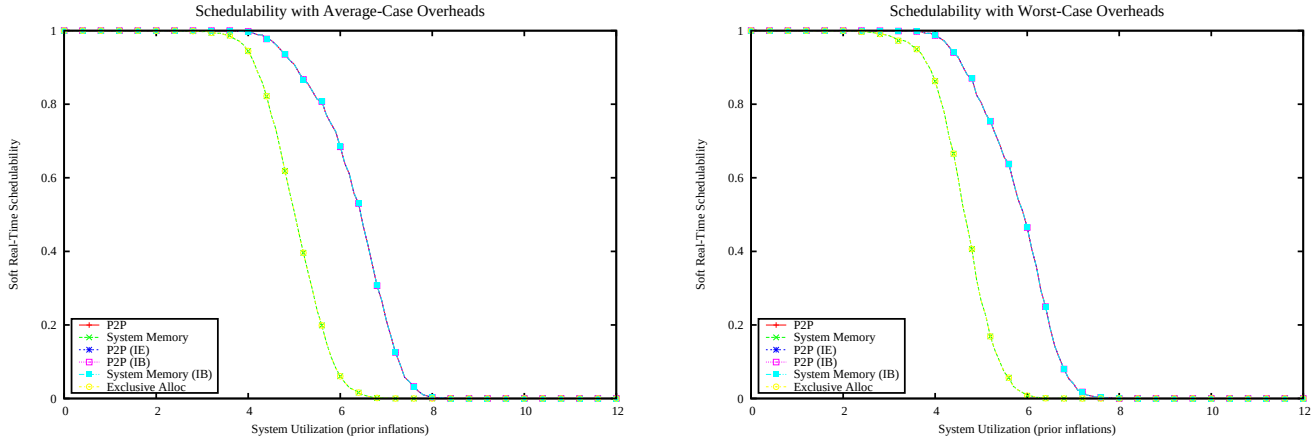

Figure 4180: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

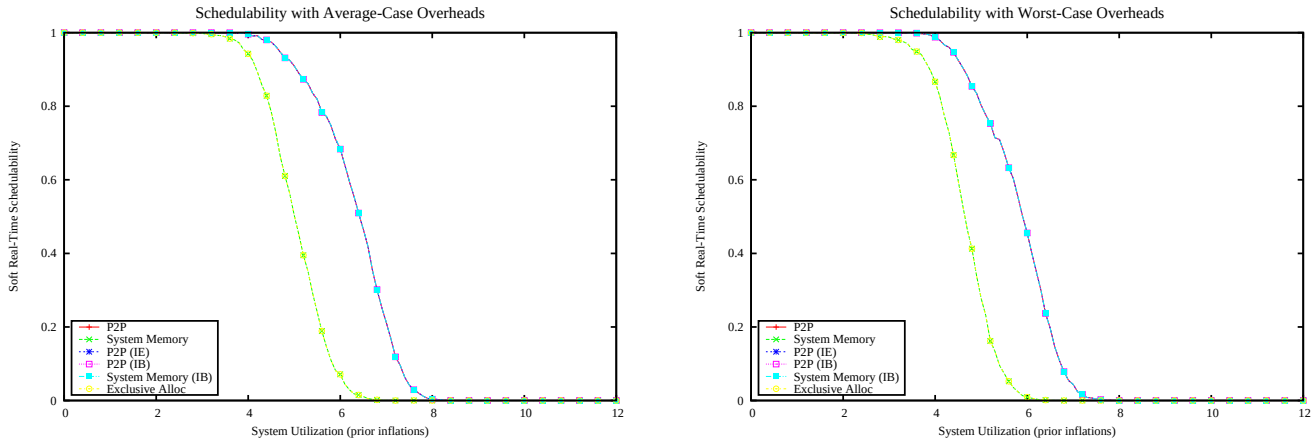

Figure 4181: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

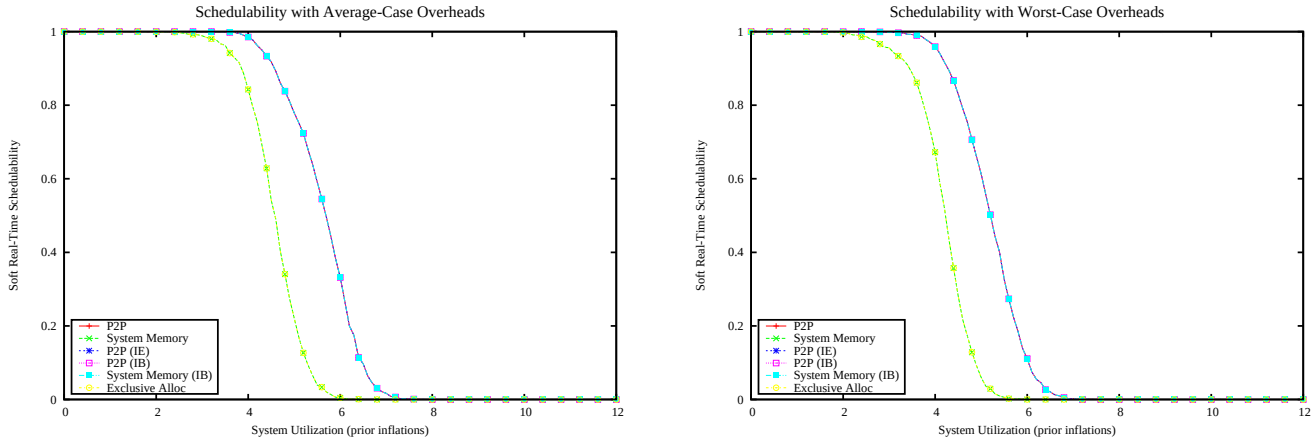

Figure 4182: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

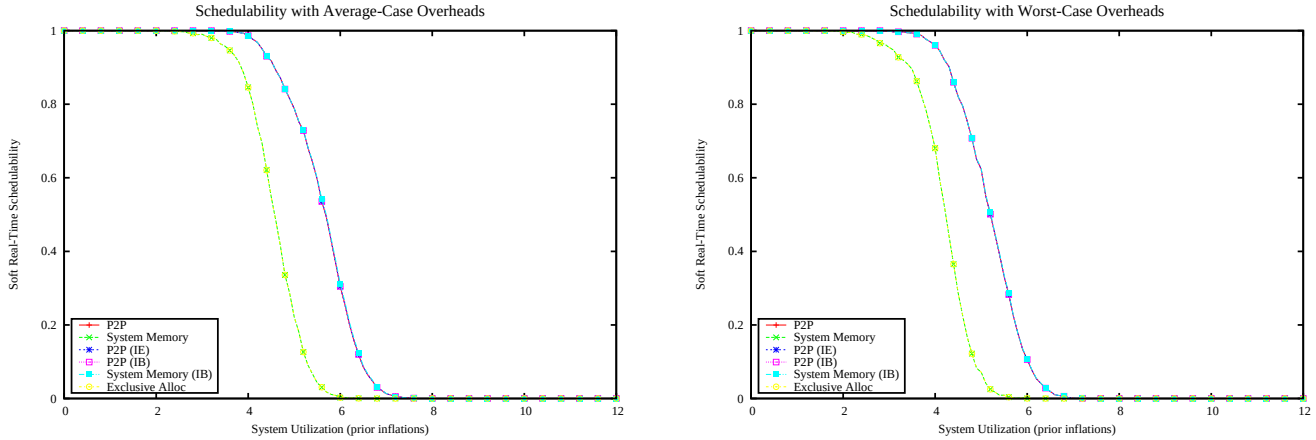

Figure 4183: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

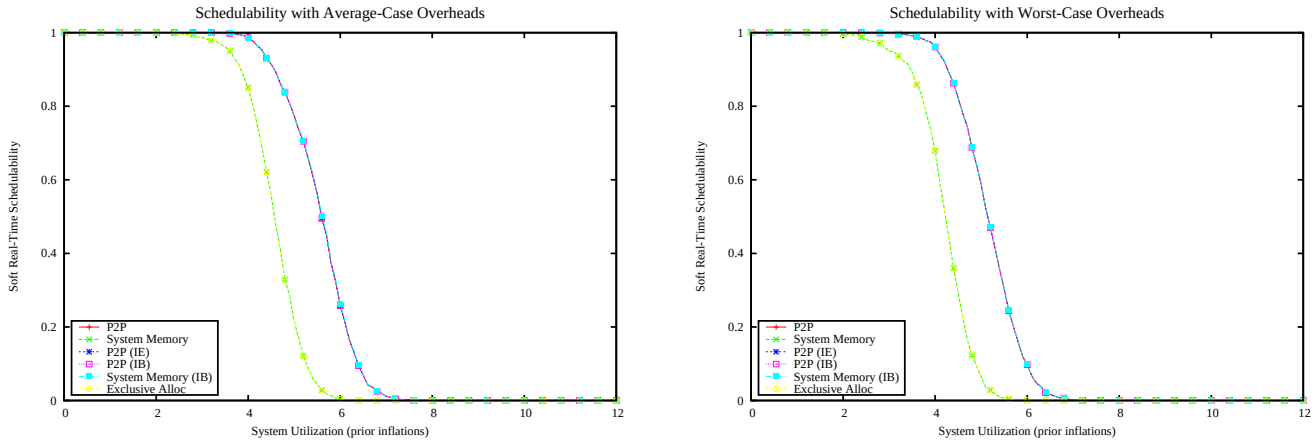

Figure 4184: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

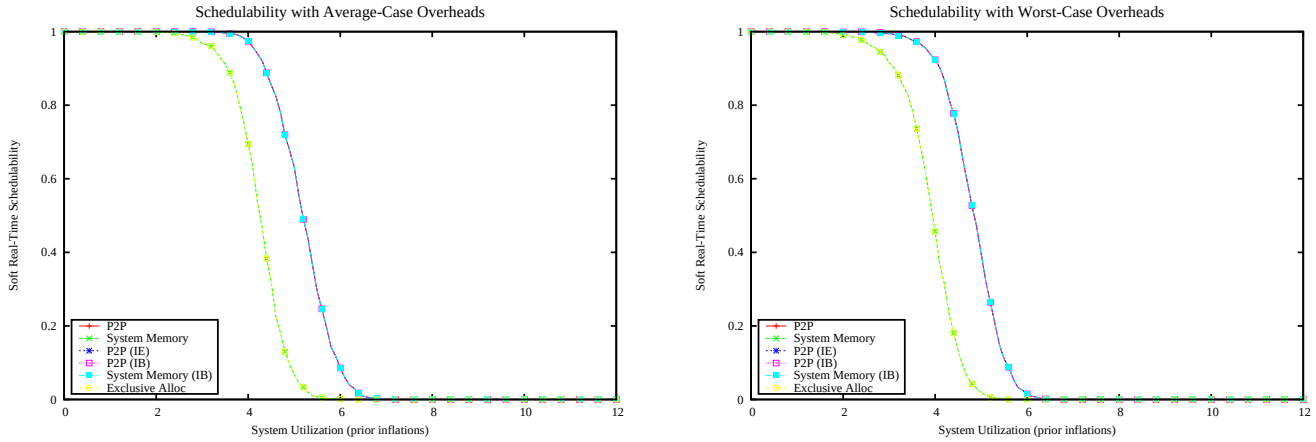

Figure 4185: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

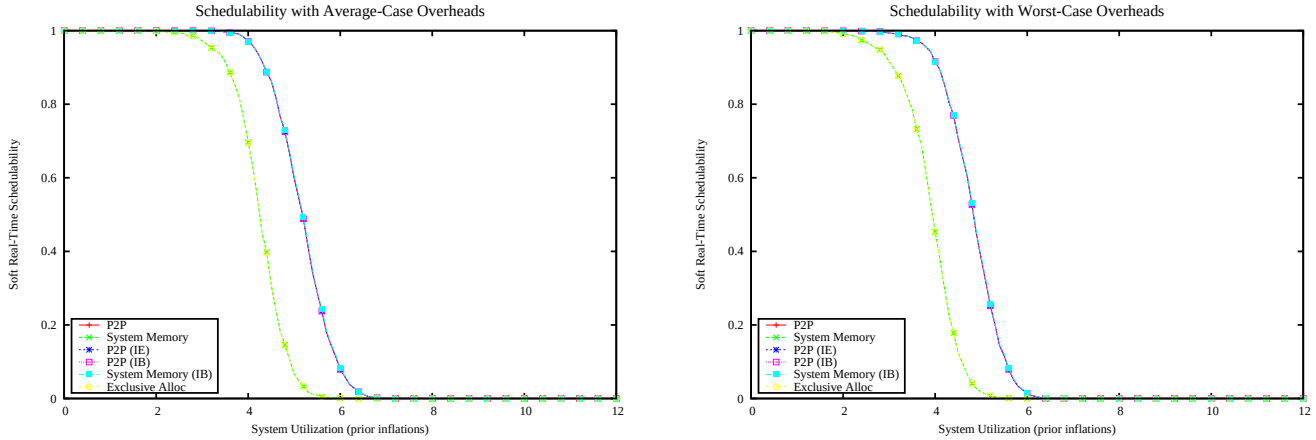

Figure 4186: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

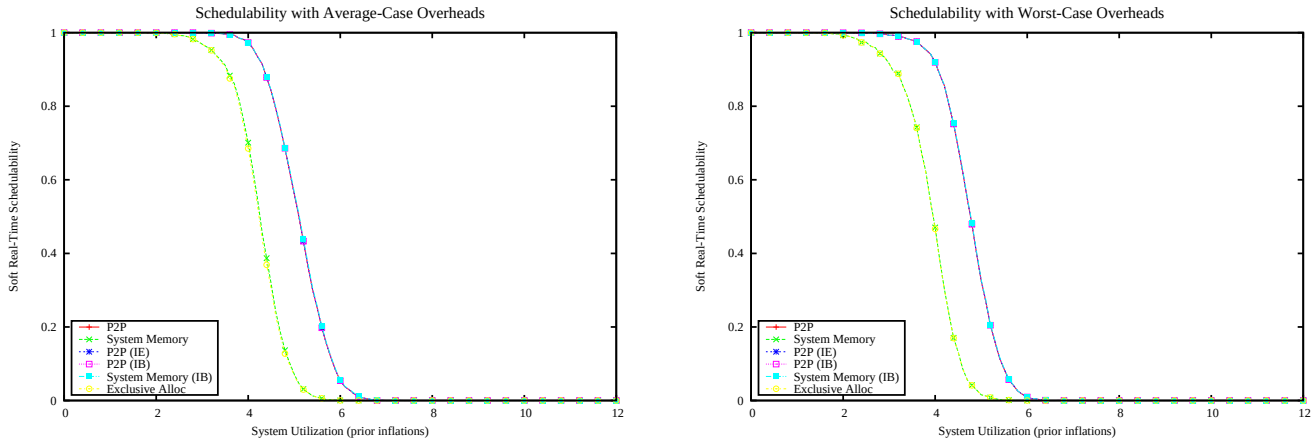

Figure 4187: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

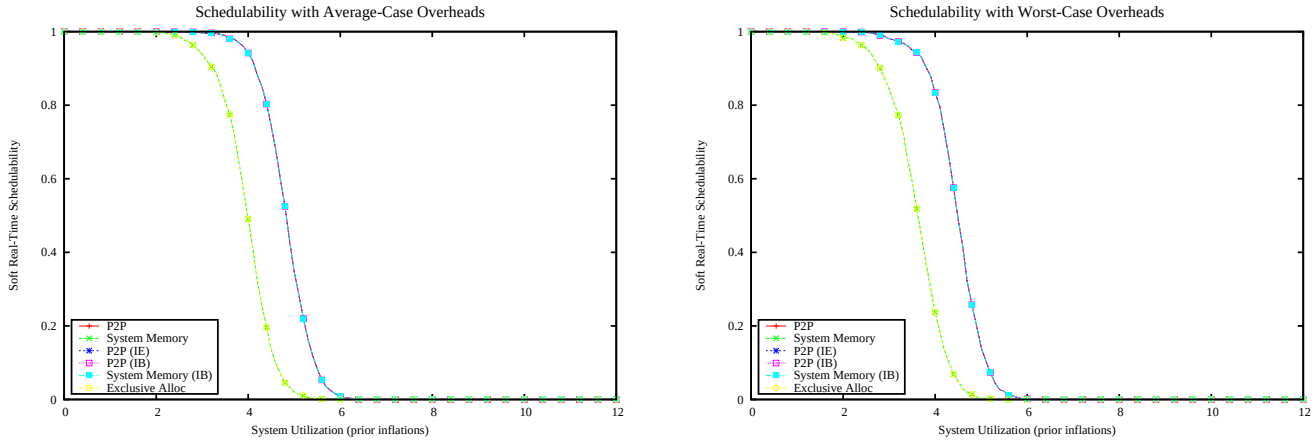

Figure 4188: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

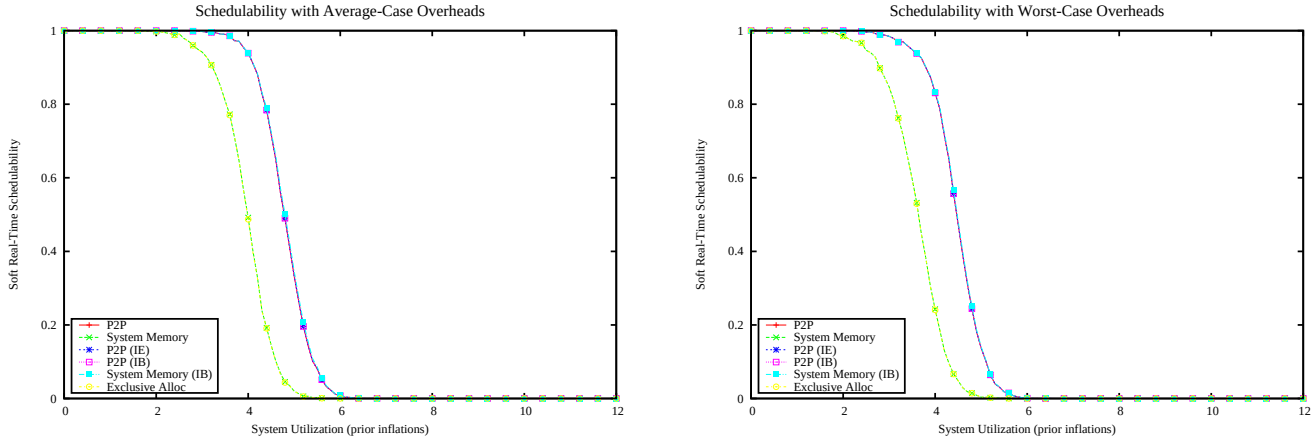

Figure 4189: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

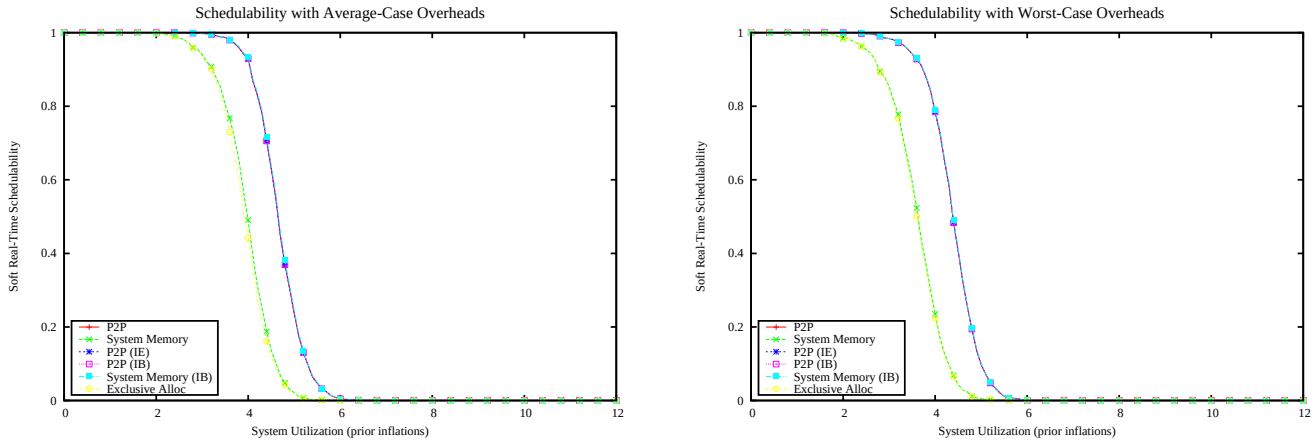

Figure 4190: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

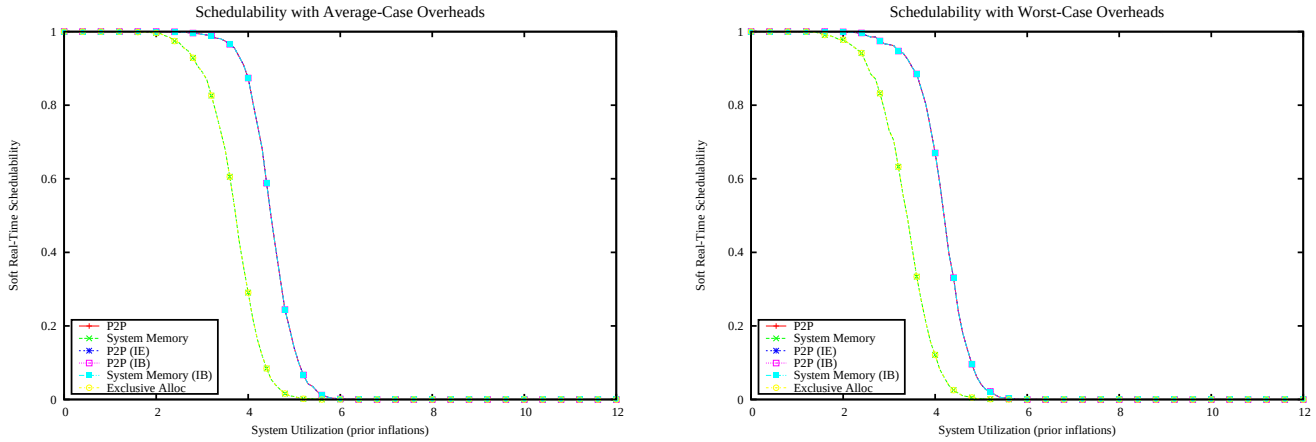

Figure 4191: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

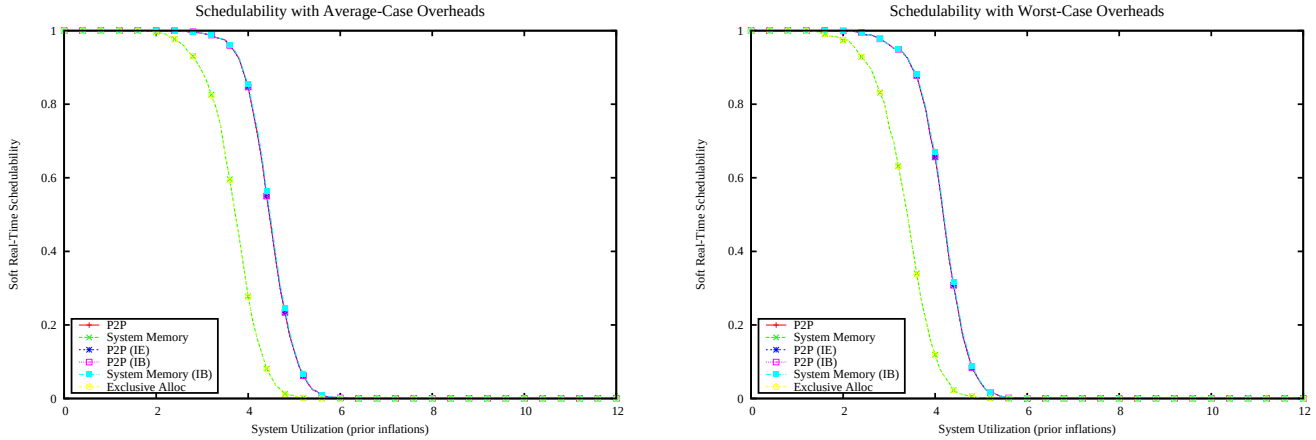

Figure 4192: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

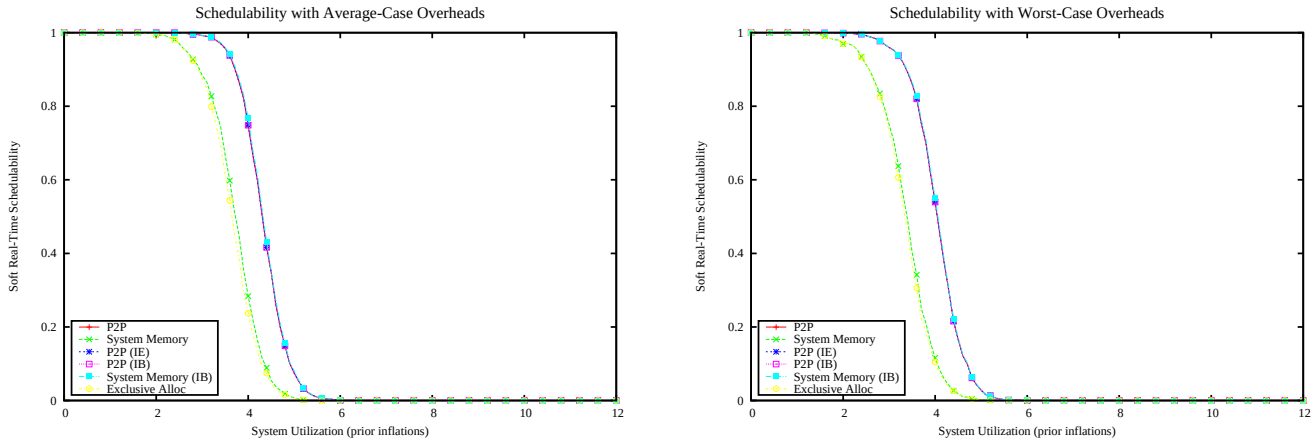

Figure 4193: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

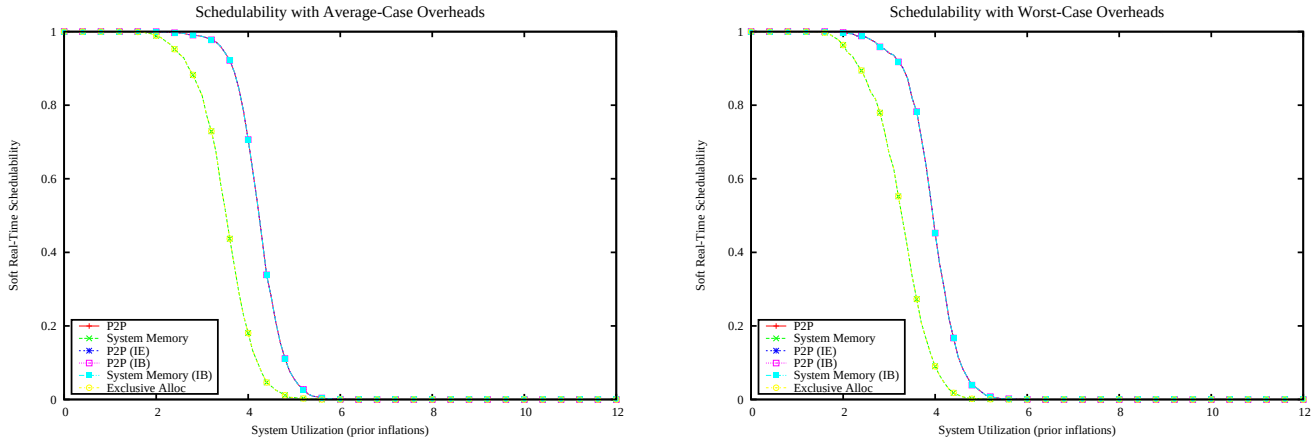

Figure 4194: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

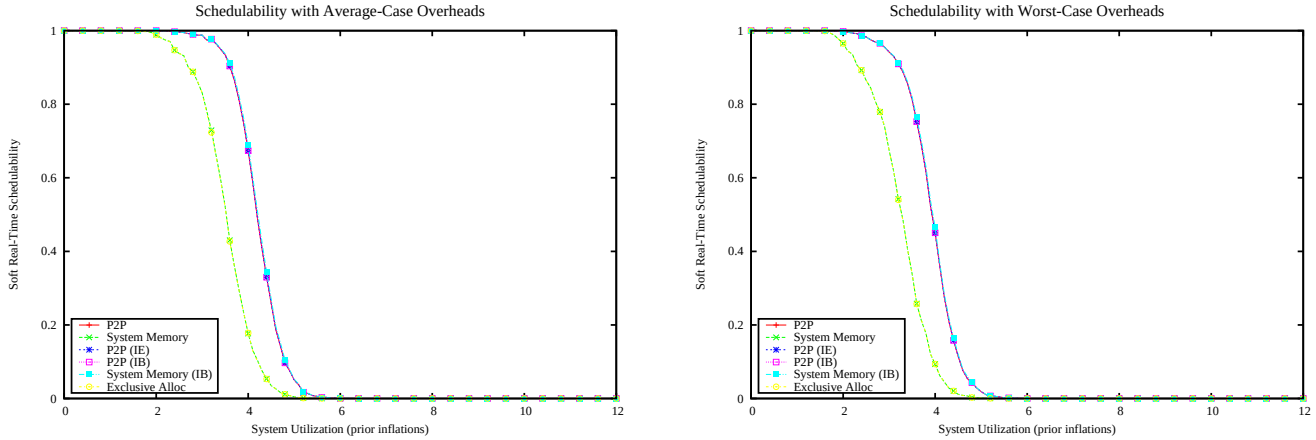

Figure 4195: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

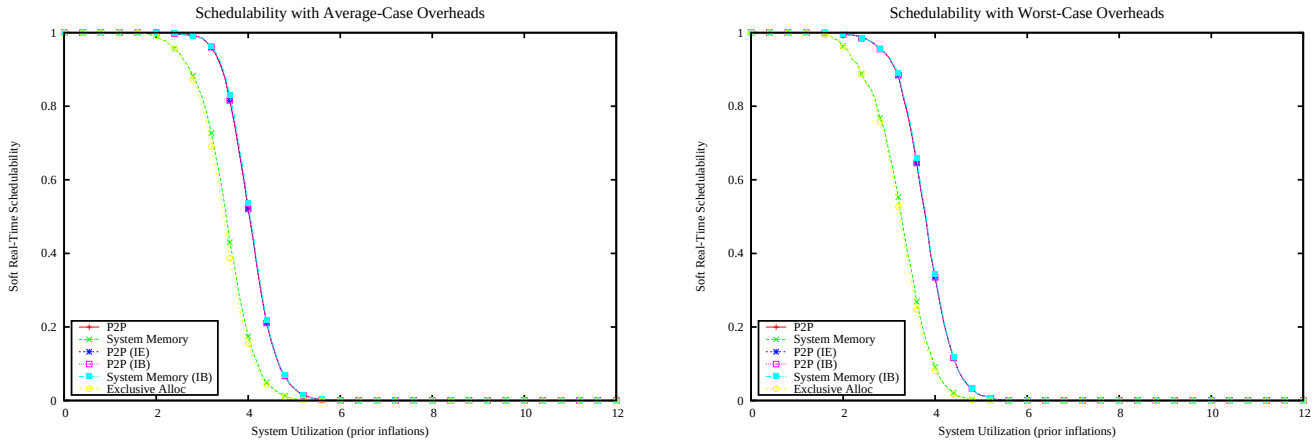

Figure 4196: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

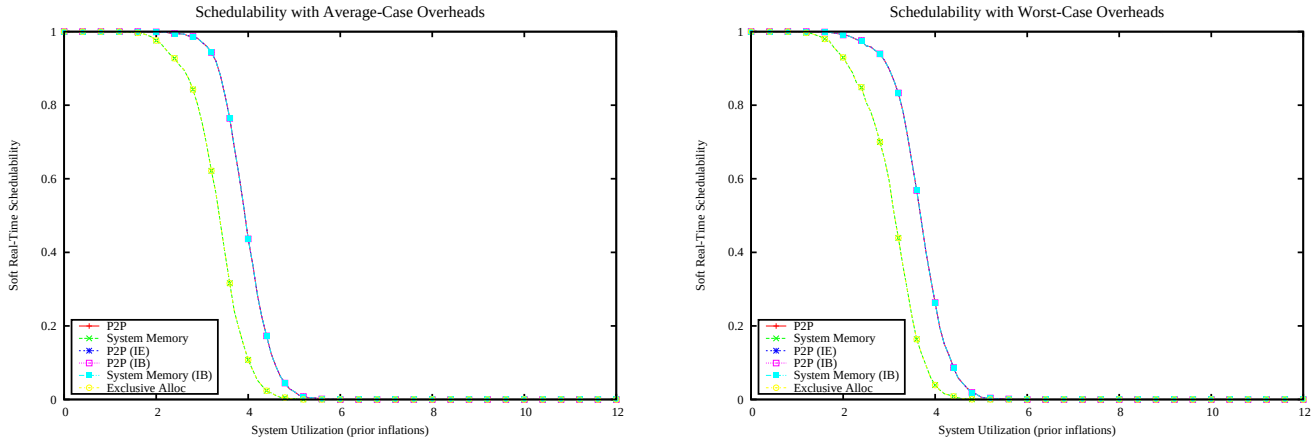

Figure 4197: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

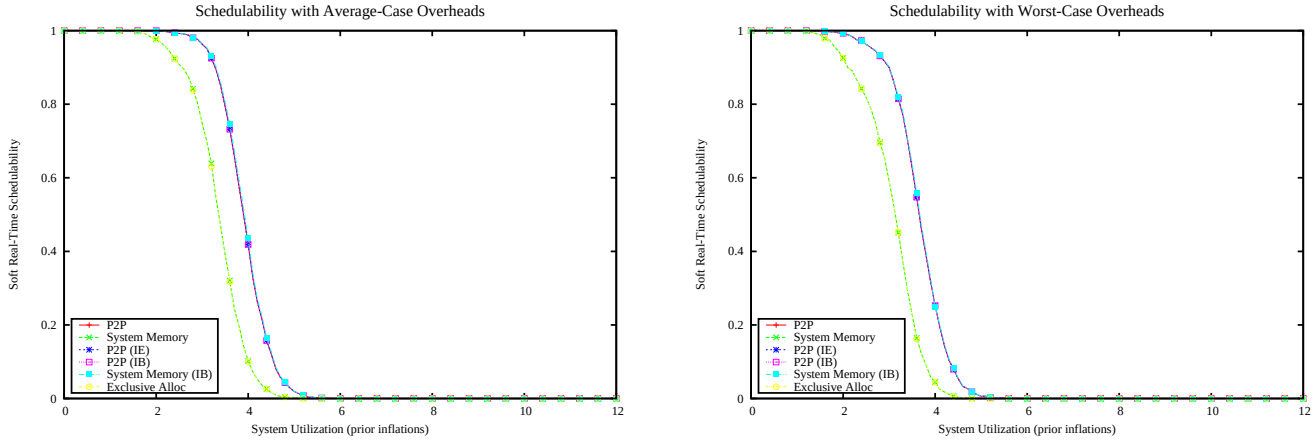

Figure 4198: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

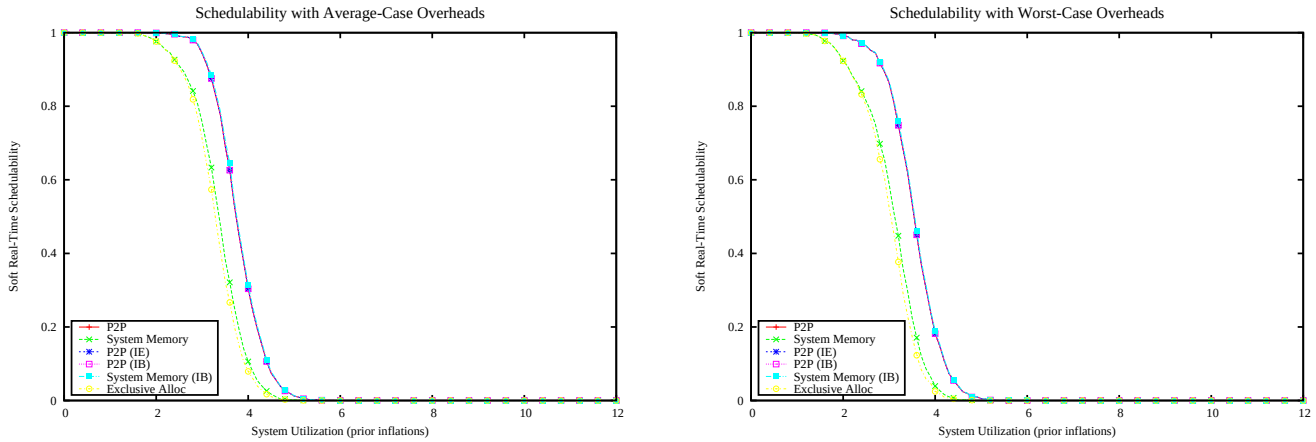

Figure 4199: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

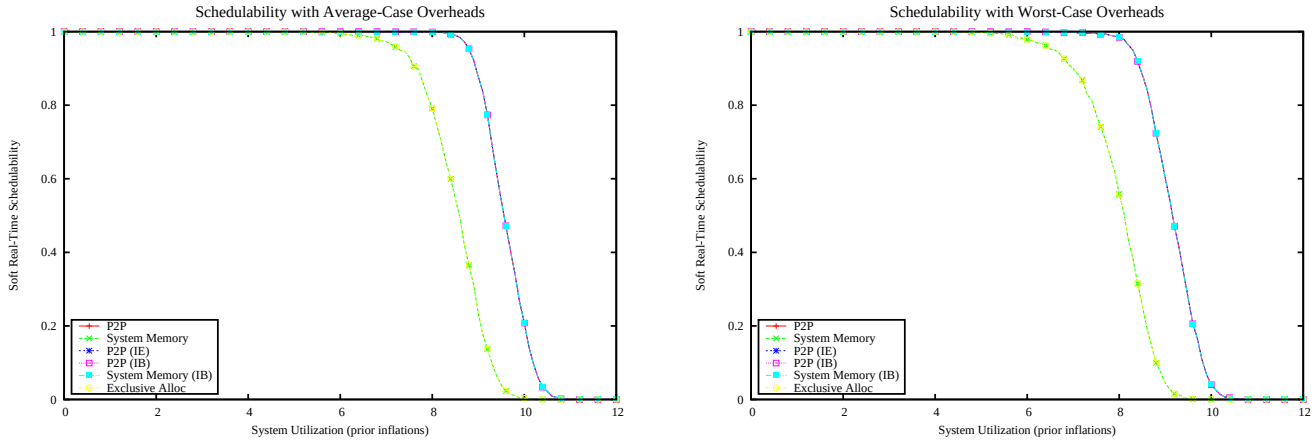

Figure 4200: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

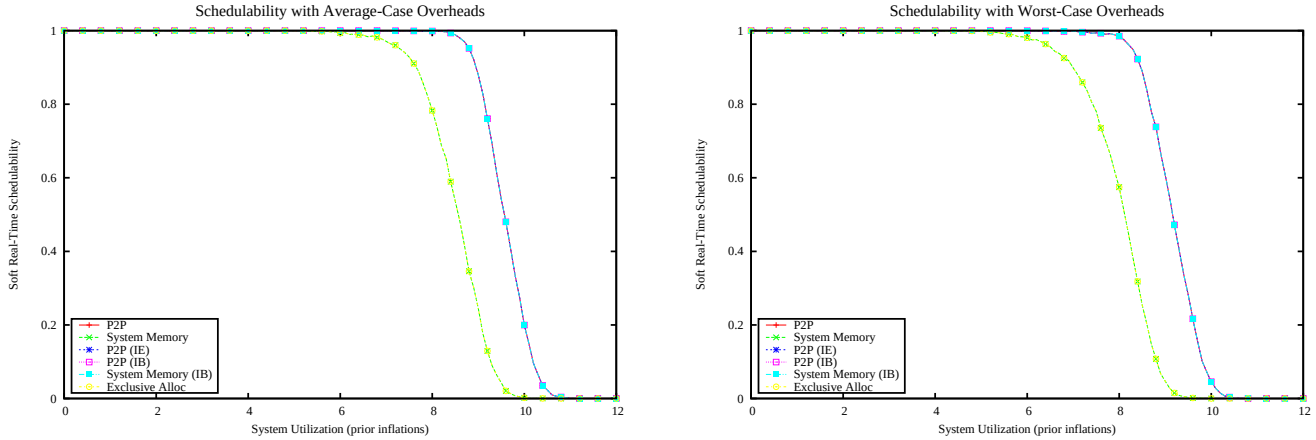

Figure 4201: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

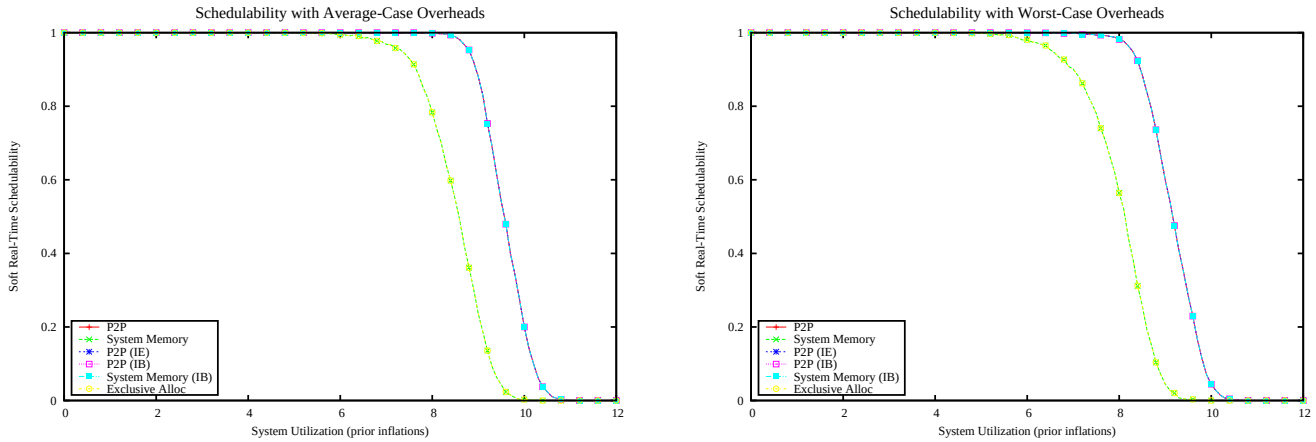

Figure 4202: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

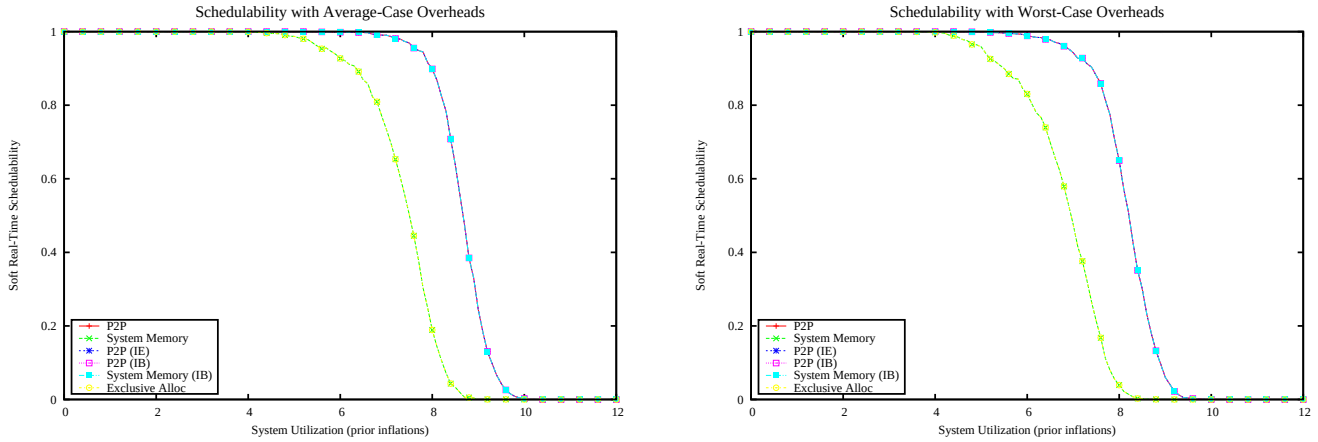

Figure 4203: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

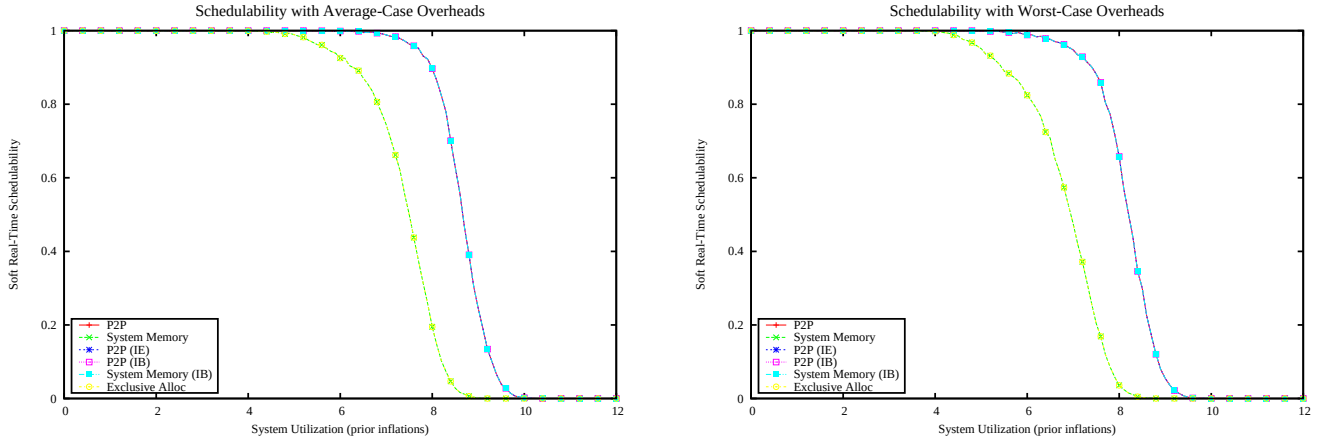

Figure 4204: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

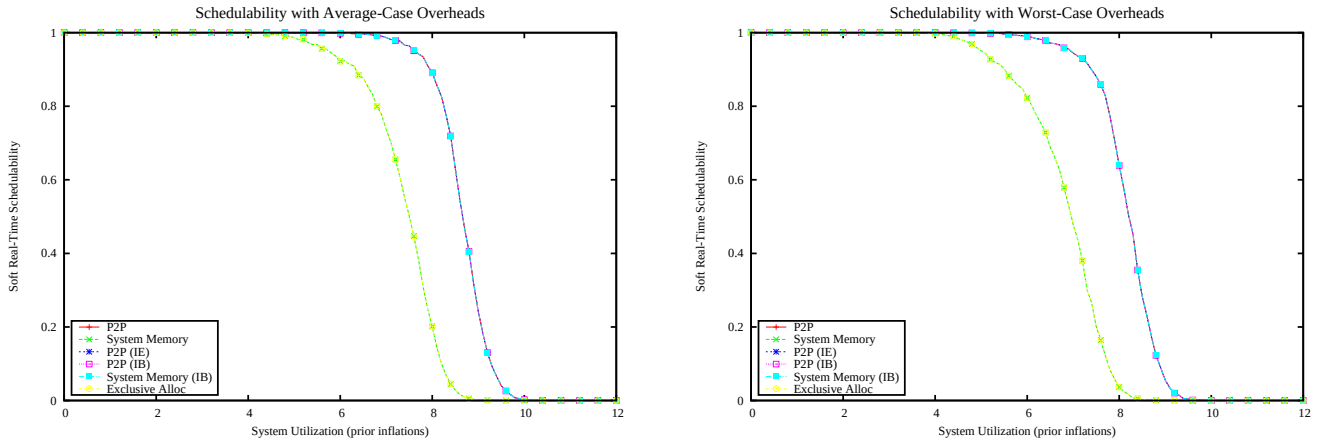

Figure 4205: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

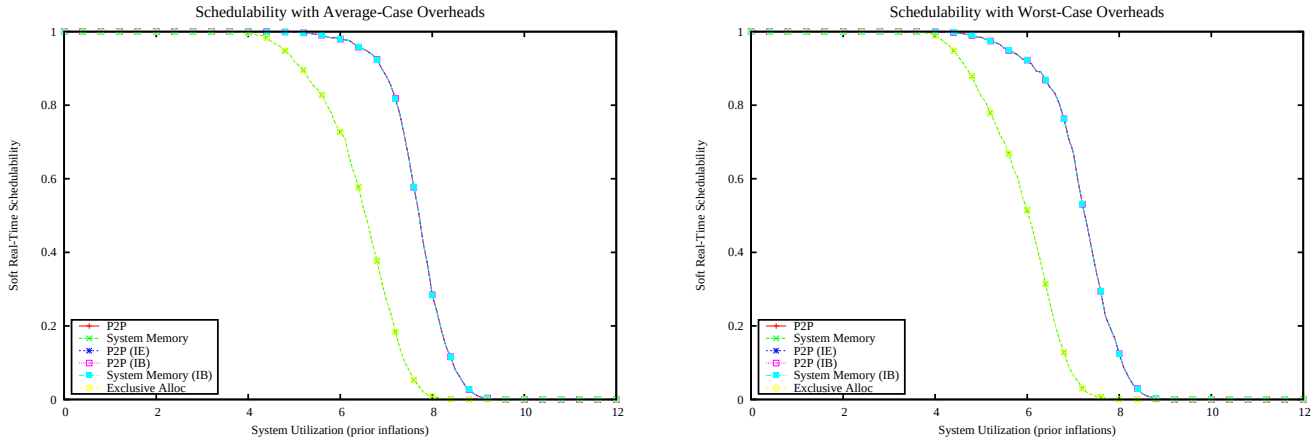

Figure 4206: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

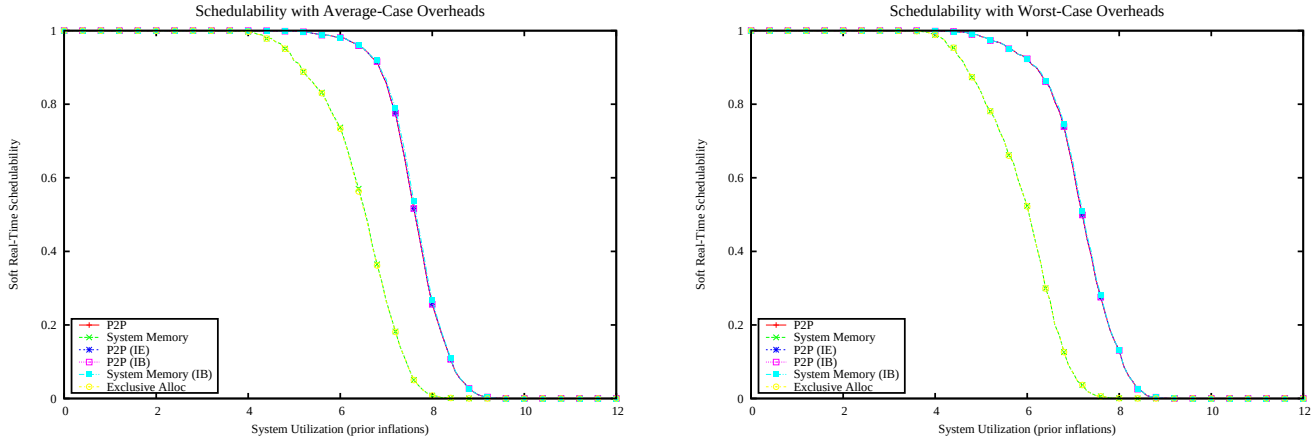

Figure 4207: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

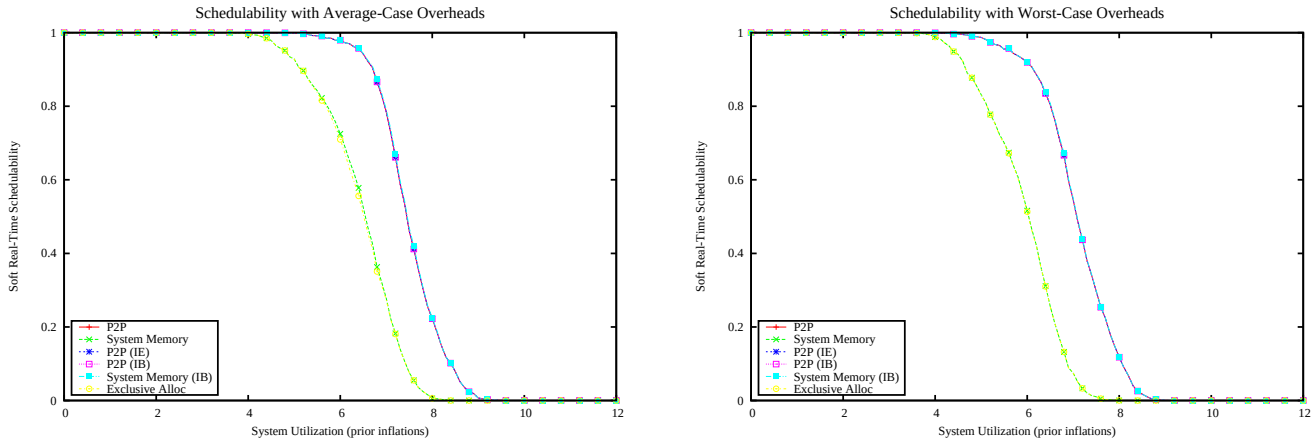

Figure 4208: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

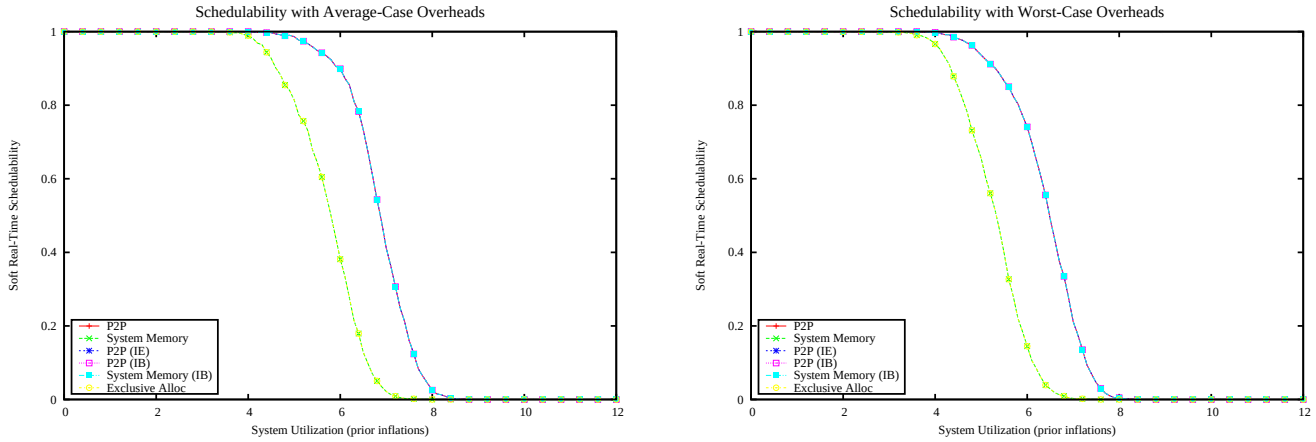

Figure 4209: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

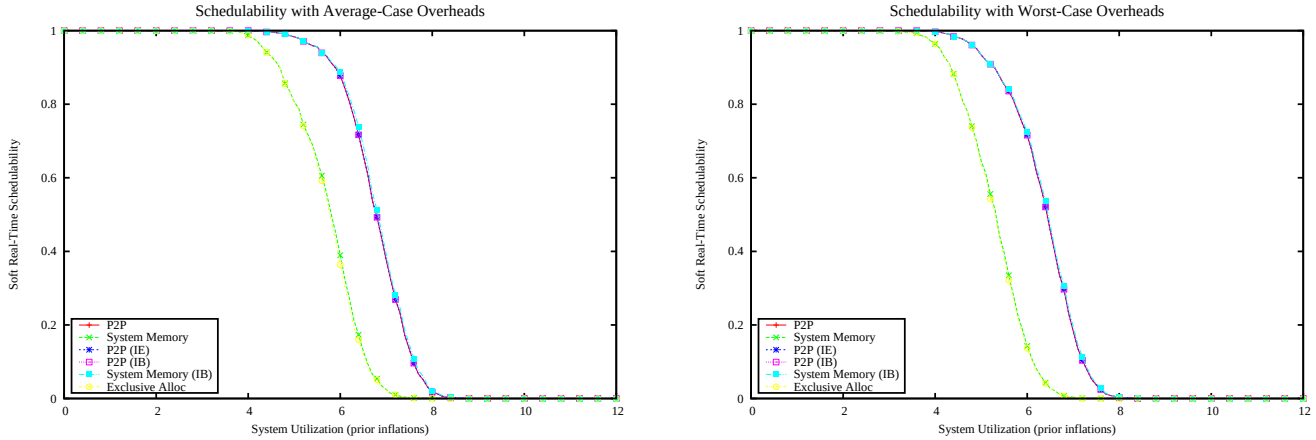

Figure 4210: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

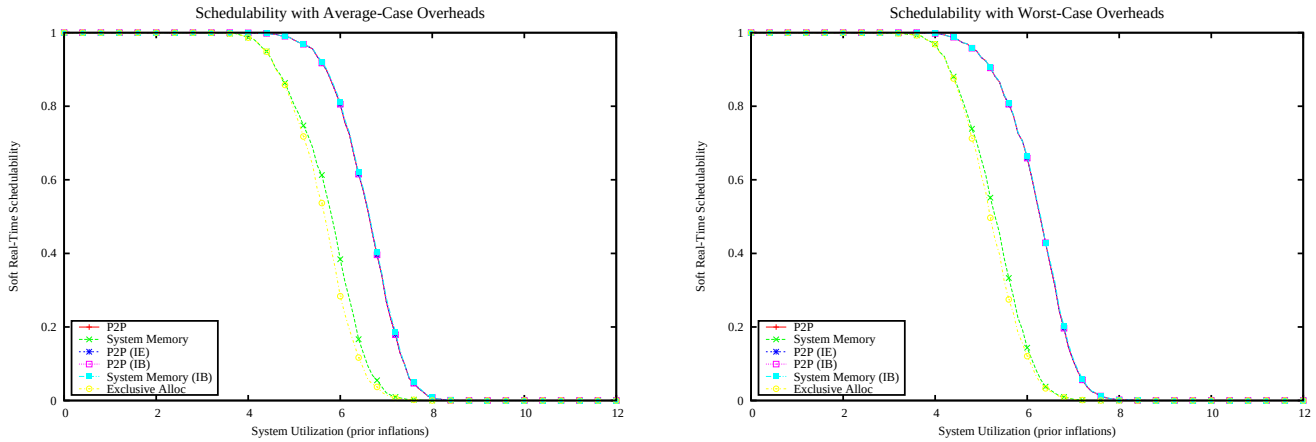

Figure 4211: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

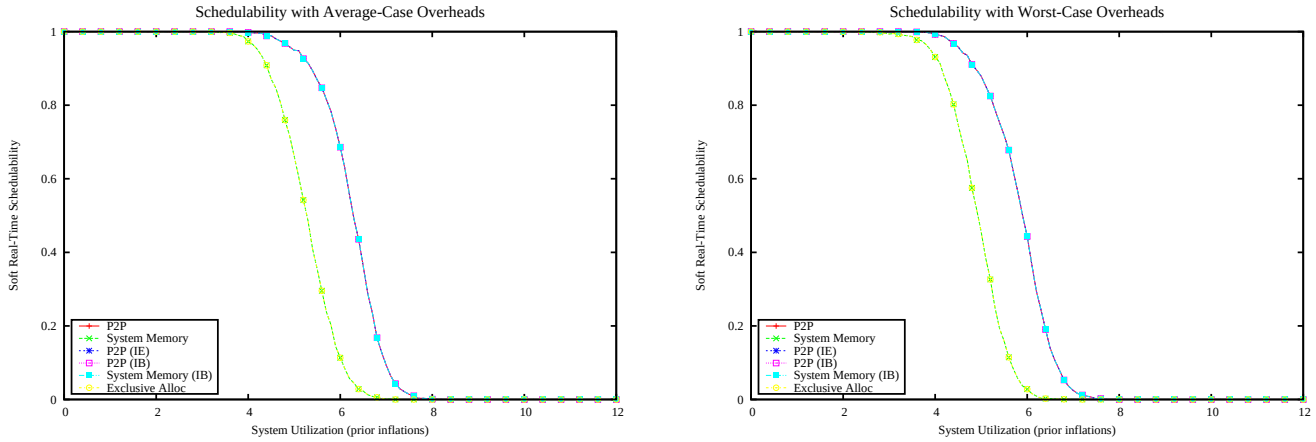

Figure 4212: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

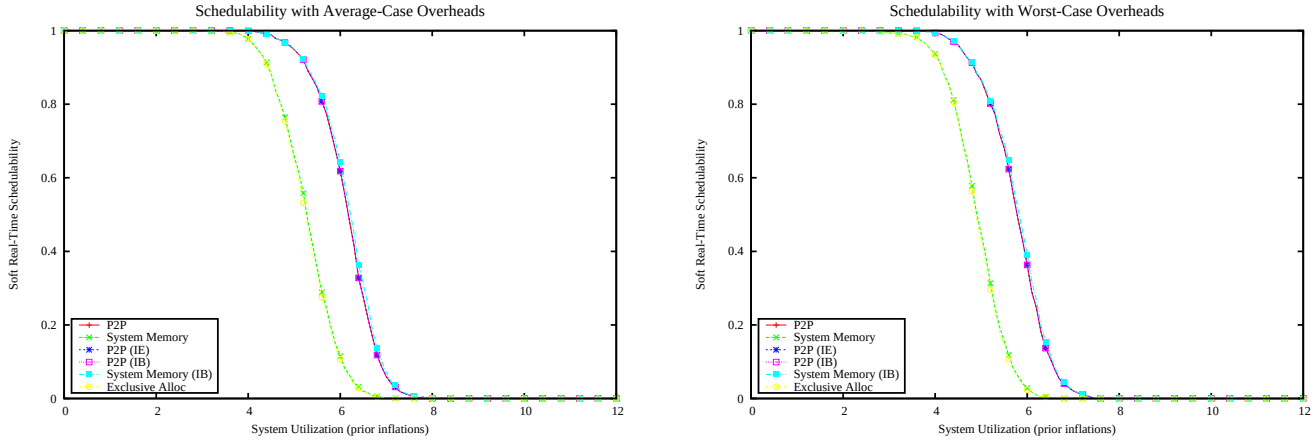

Figure 4213: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

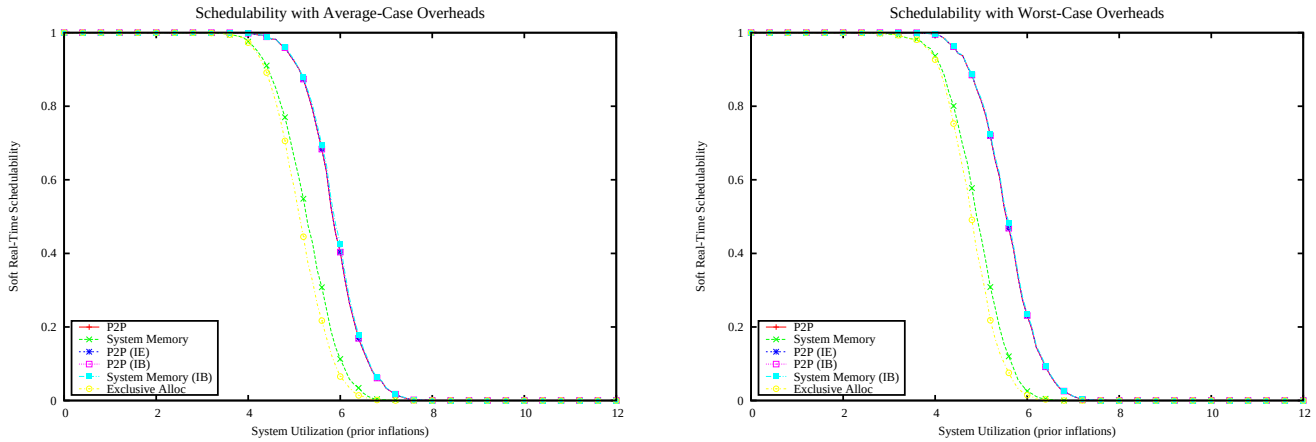

Figure 4214: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

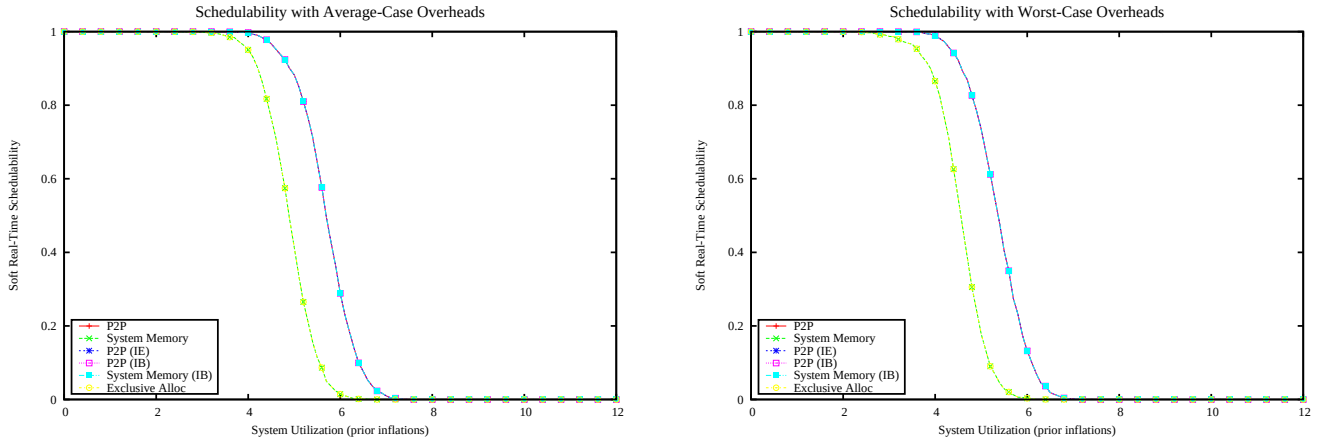

Figure 4215: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

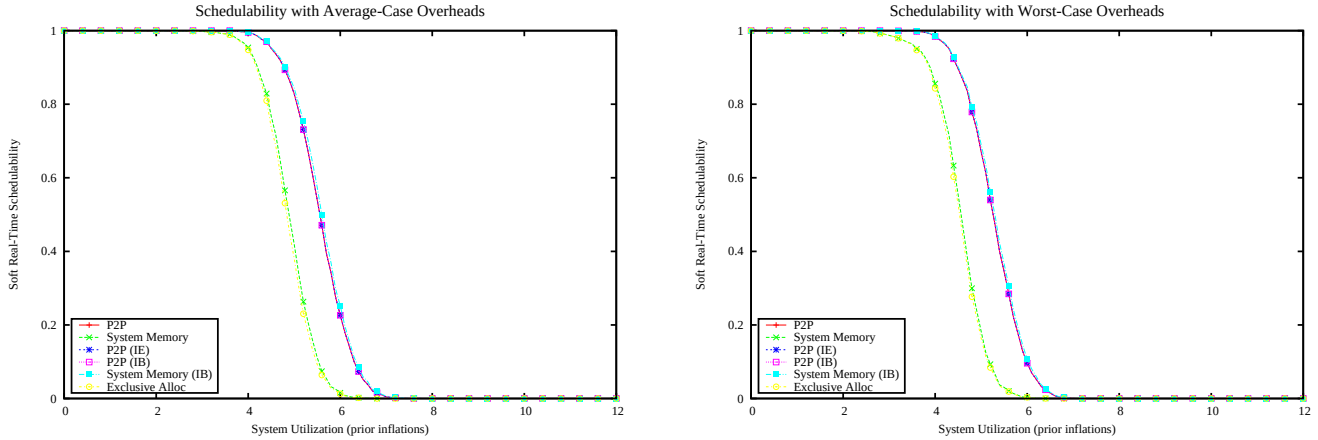

Figure 4216: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

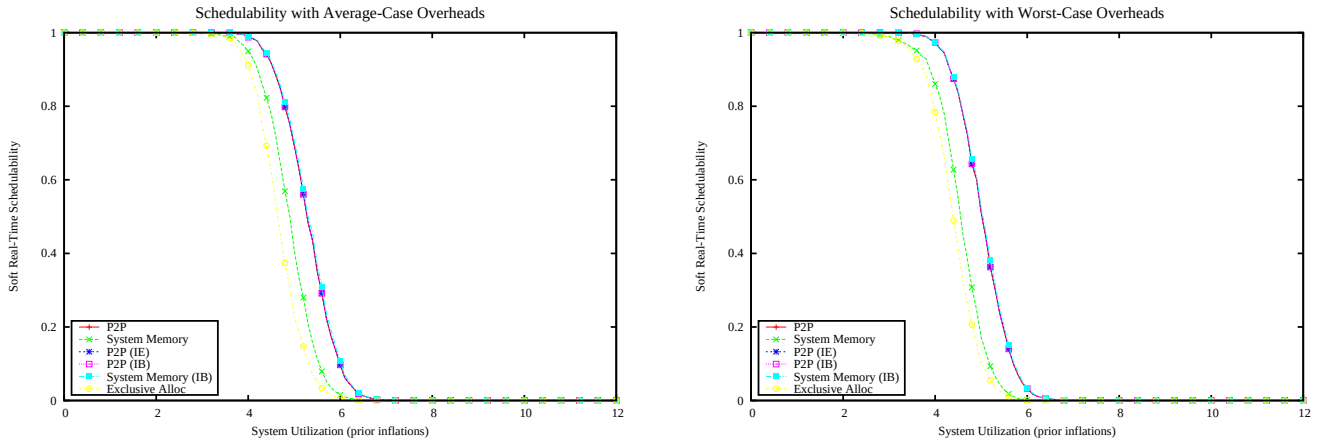

Figure 4217: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

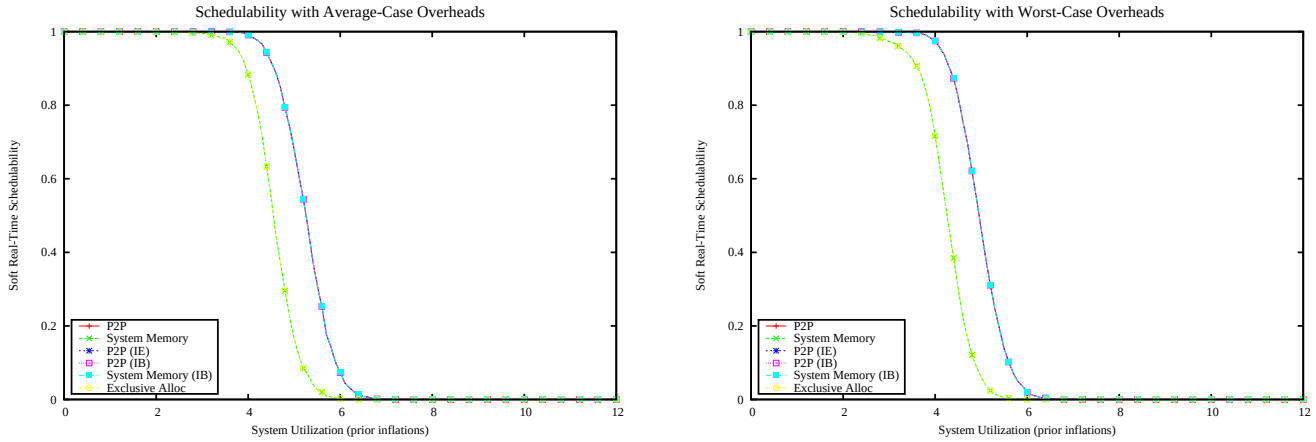

Figure 4218: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

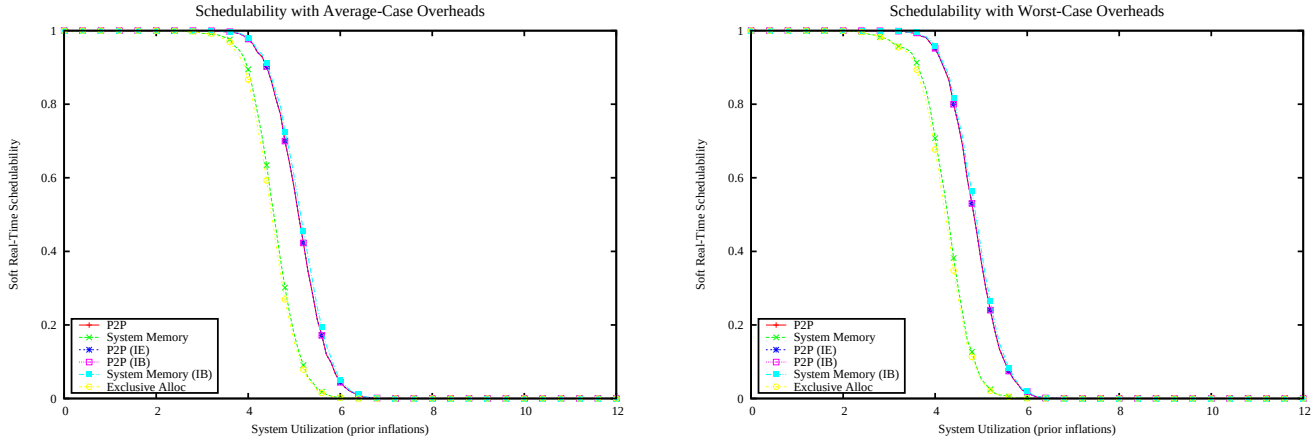

Figure 4219: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

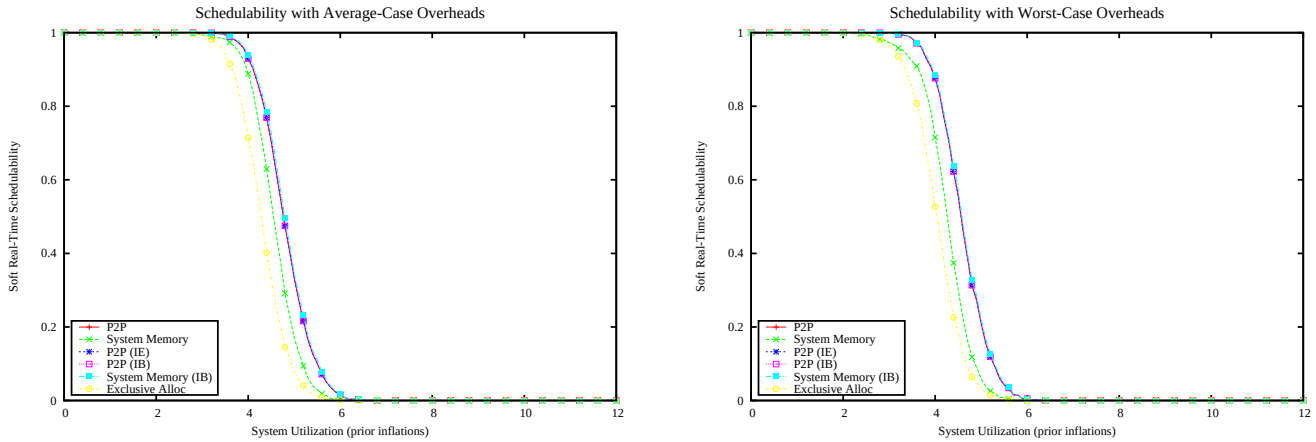

Figure 4220: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

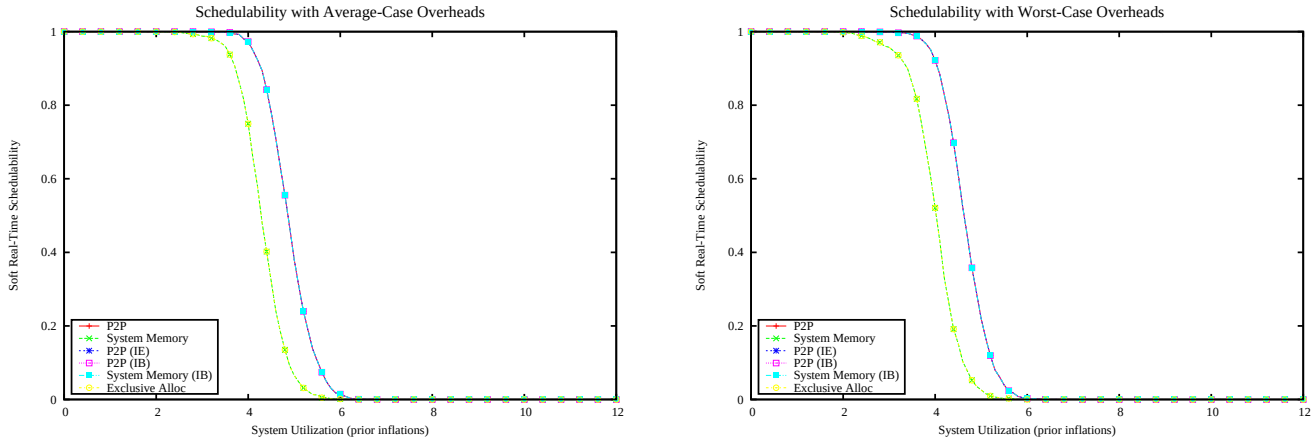

Figure 4221: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

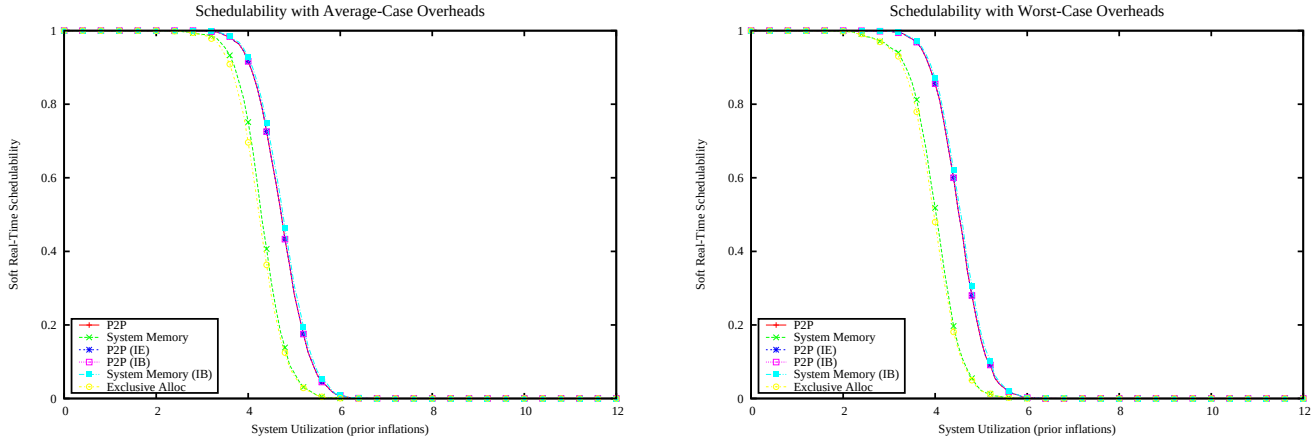

Figure 4222: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

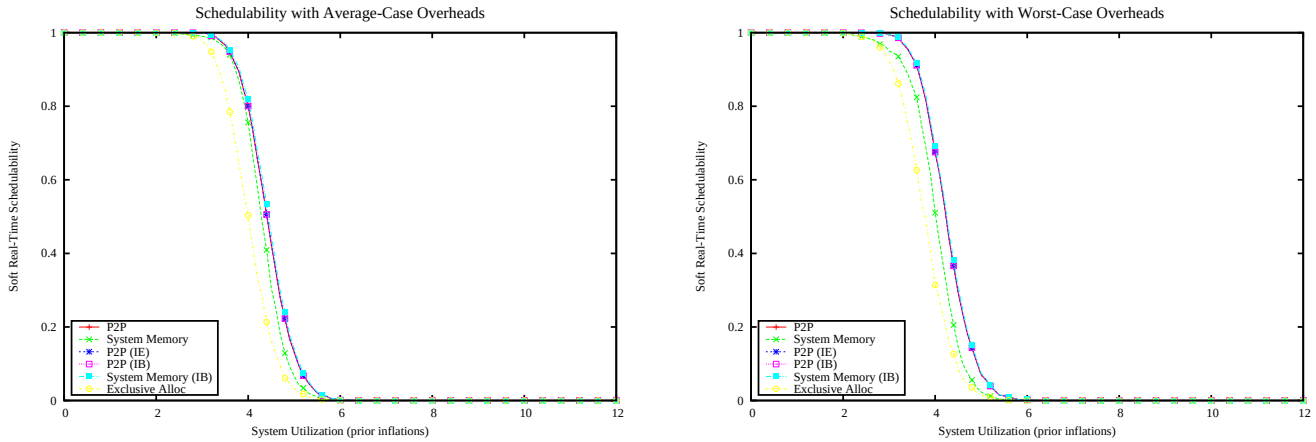

Figure 4223: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

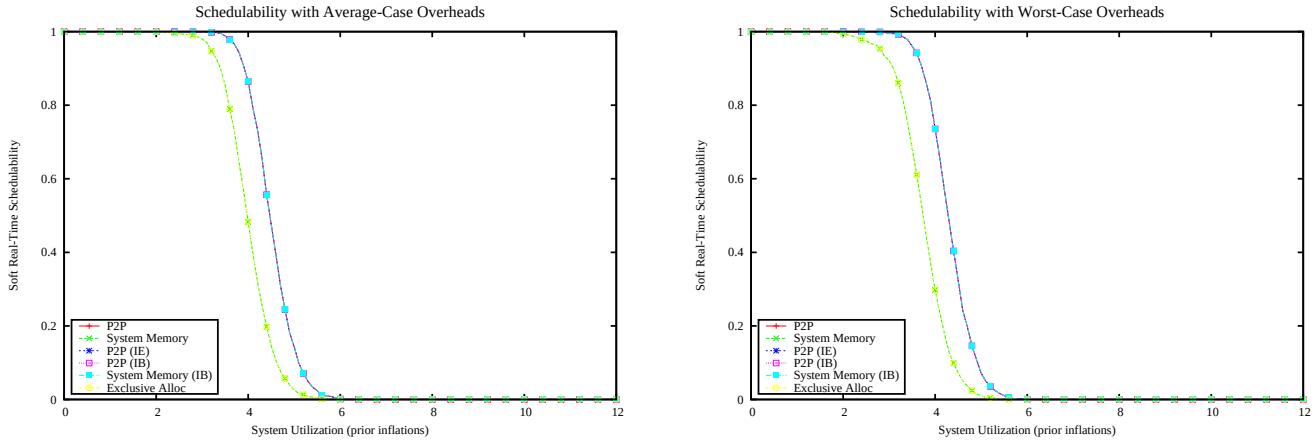

Figure 4224: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

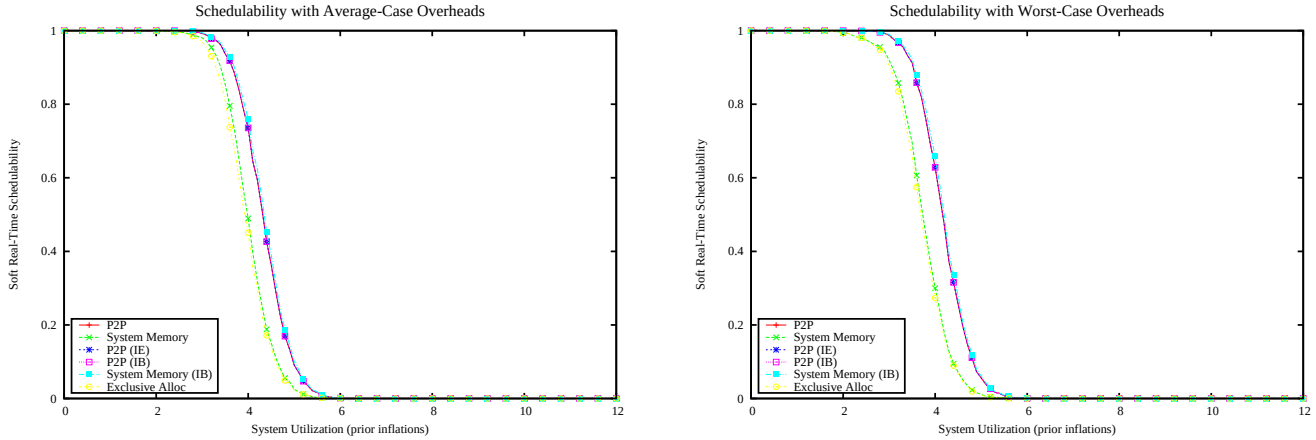

Figure 4225: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

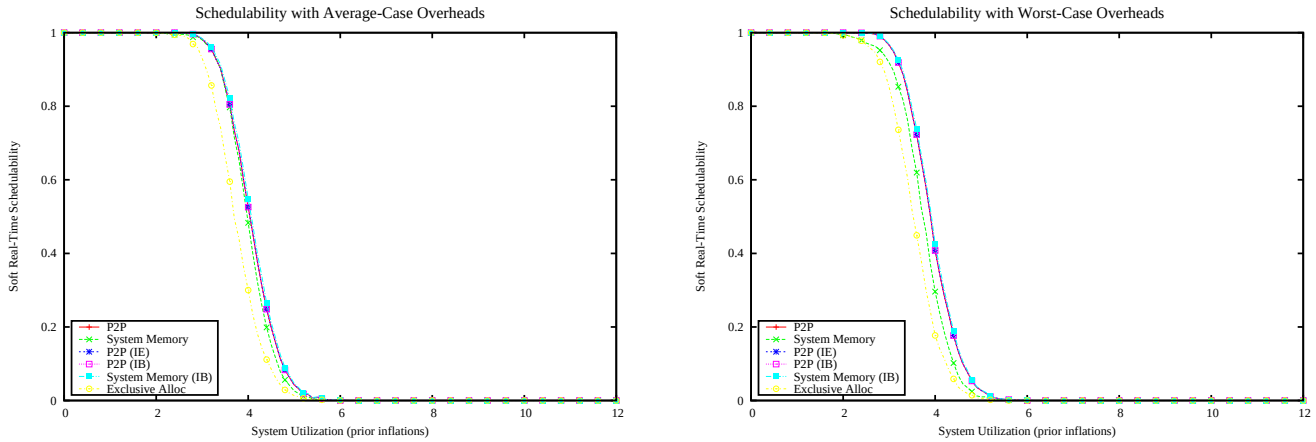

Figure 4226: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

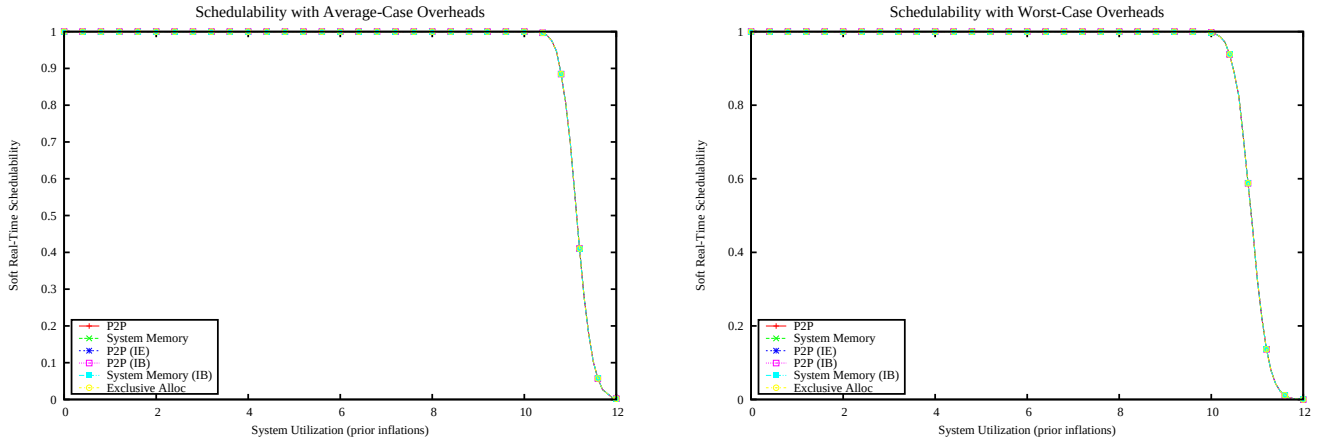

Figure 4227: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

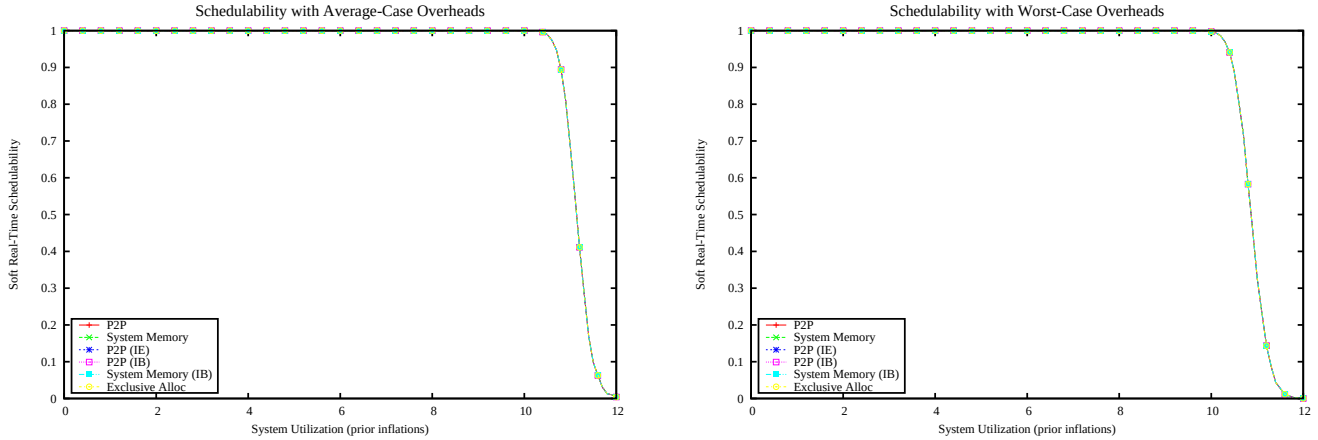

Figure 4228: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

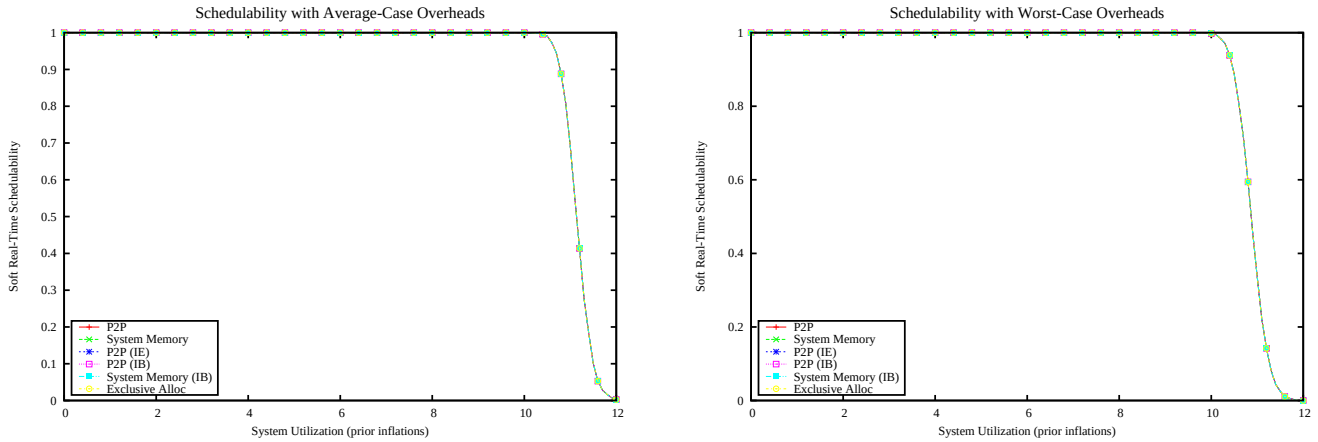

Figure 4229: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

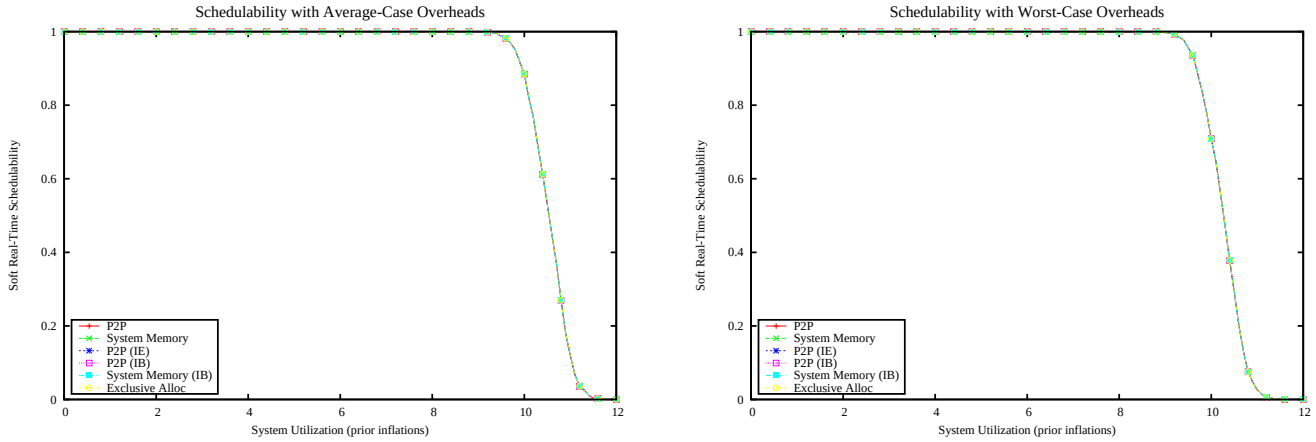

Figure 4230: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

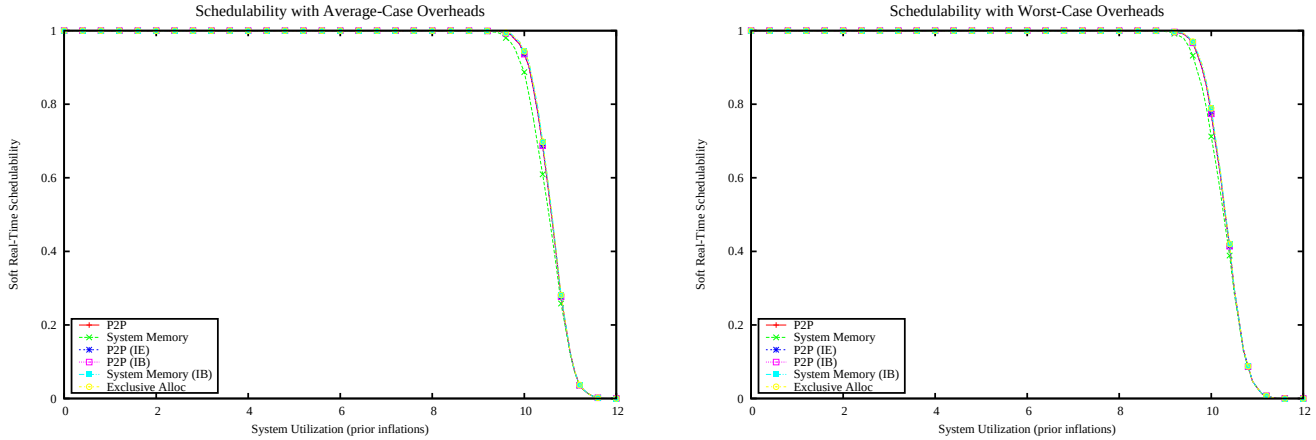

Figure 4231: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

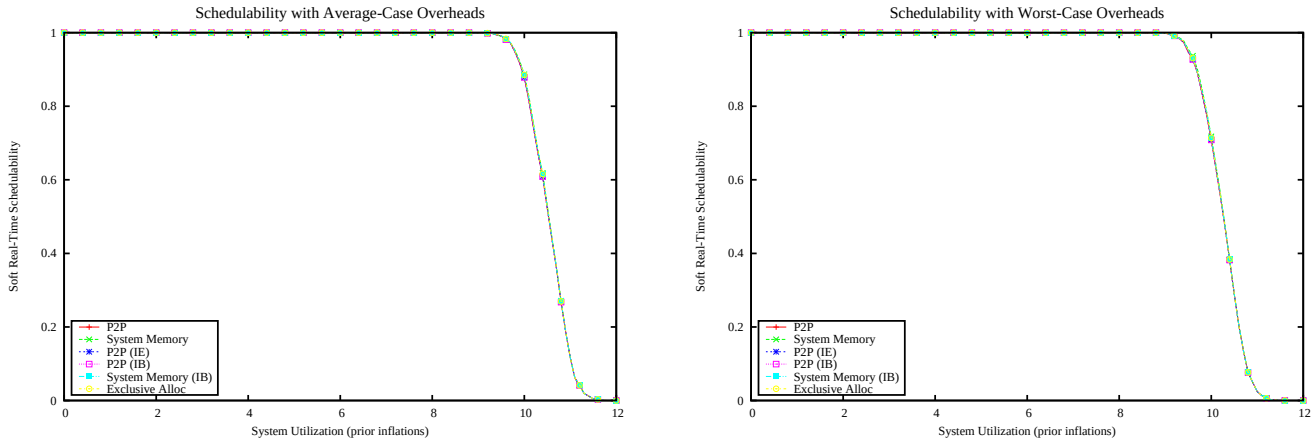

Figure 4232: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

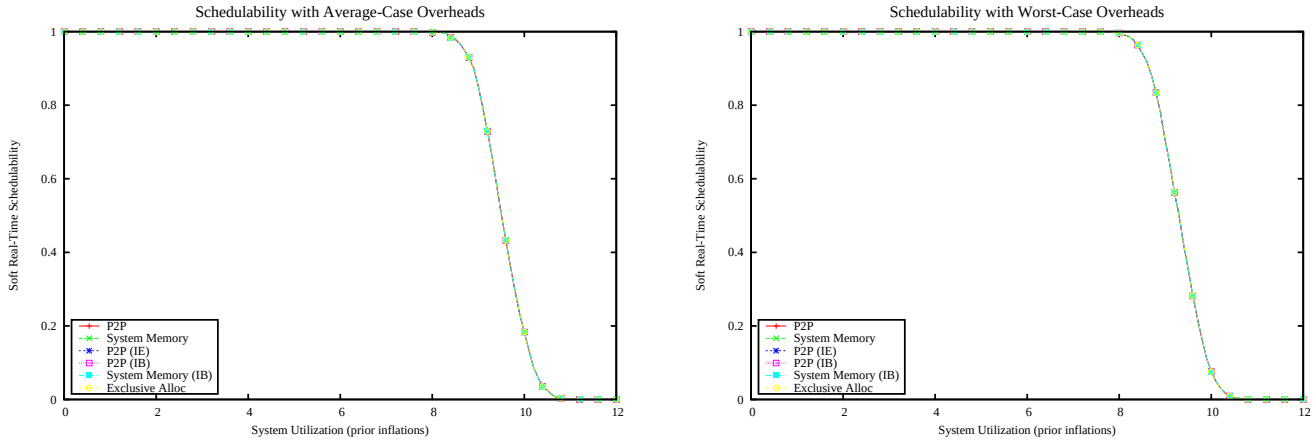

Figure 4233: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

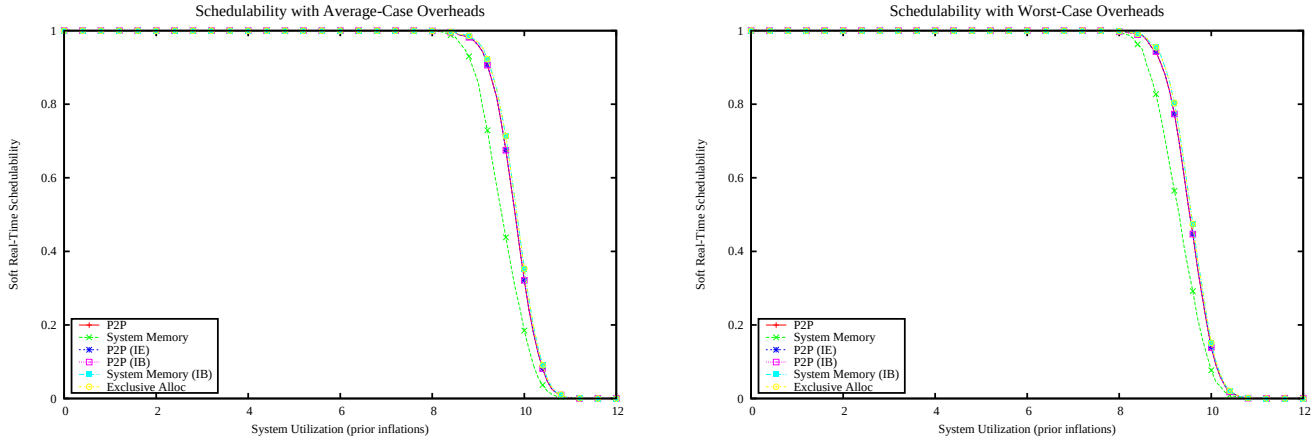

Figure 4234: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

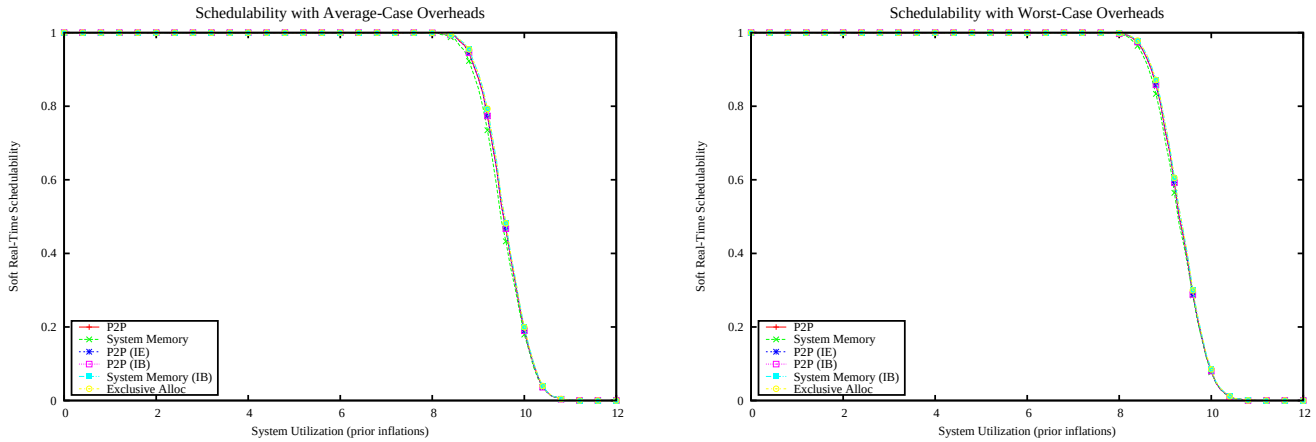

Figure 4235: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

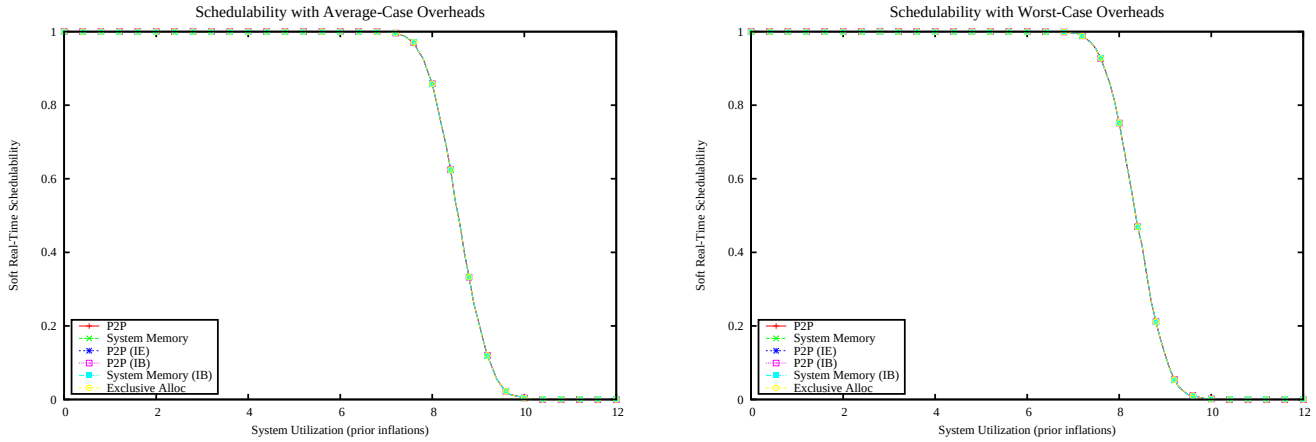

Figure 4236: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

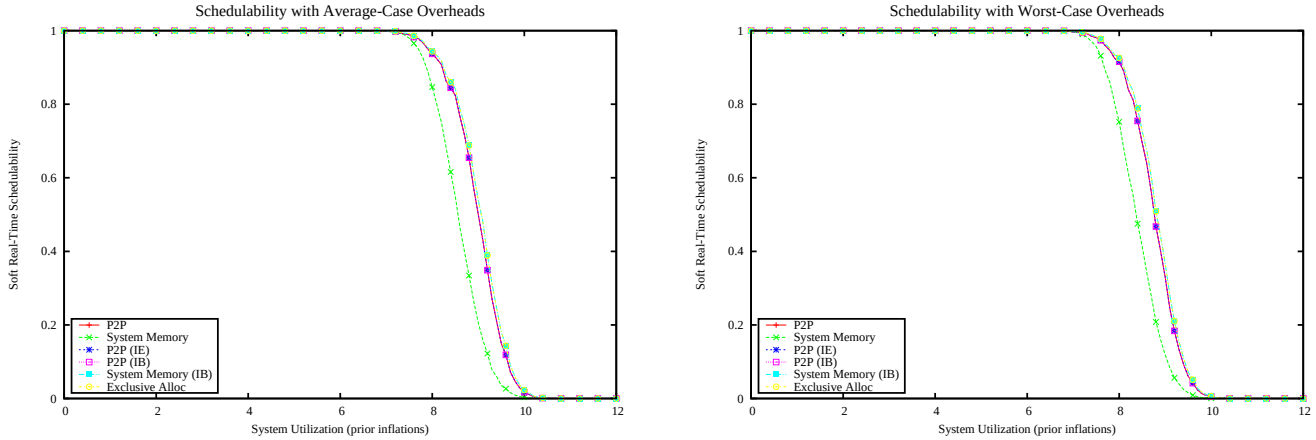

Figure 4237: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

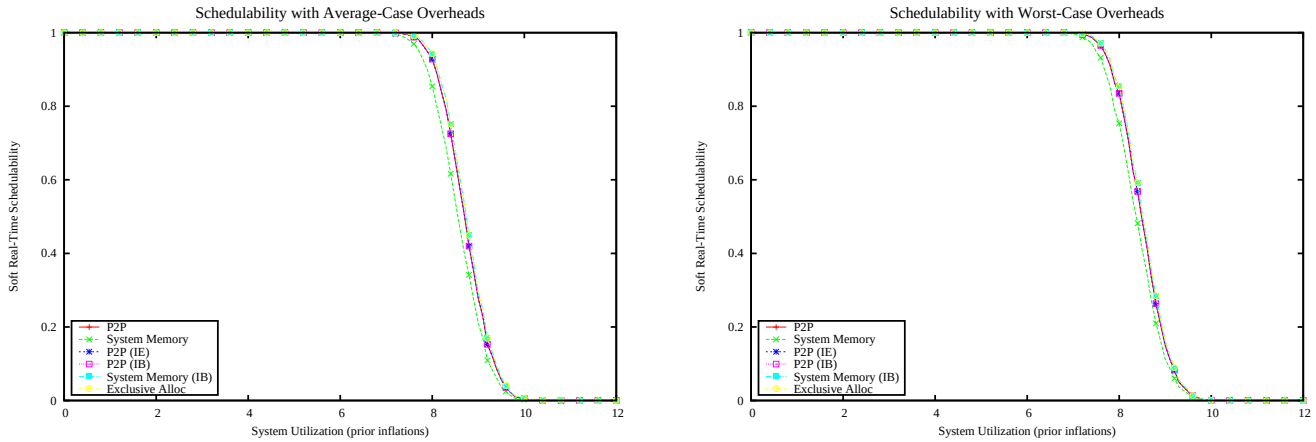

Figure 4238: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

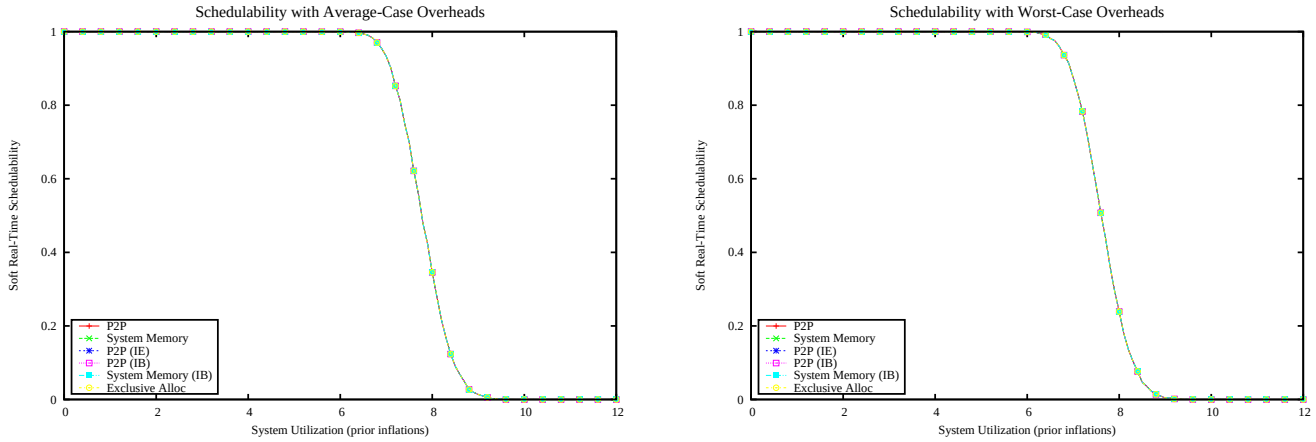

Figure 4239: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

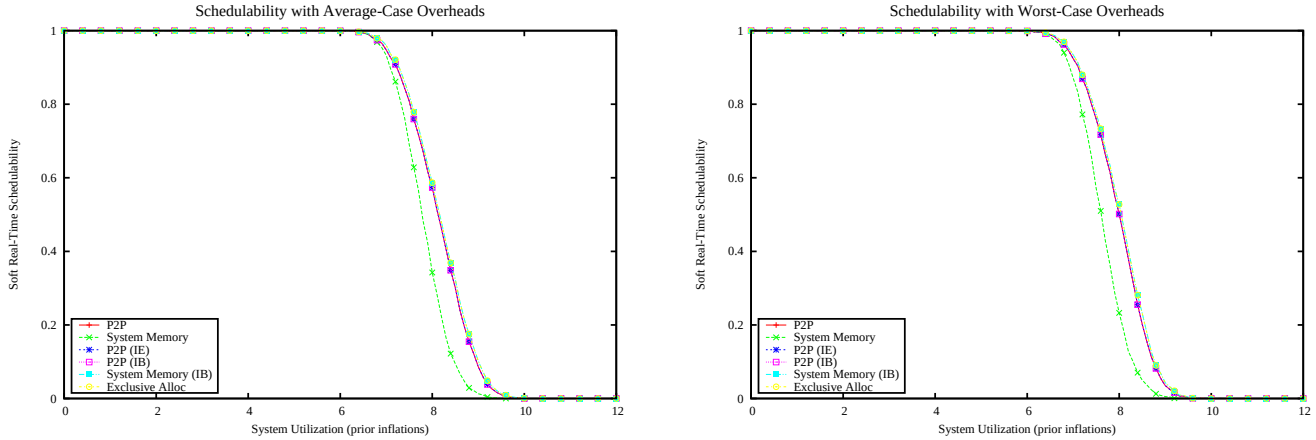

Figure 4240: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

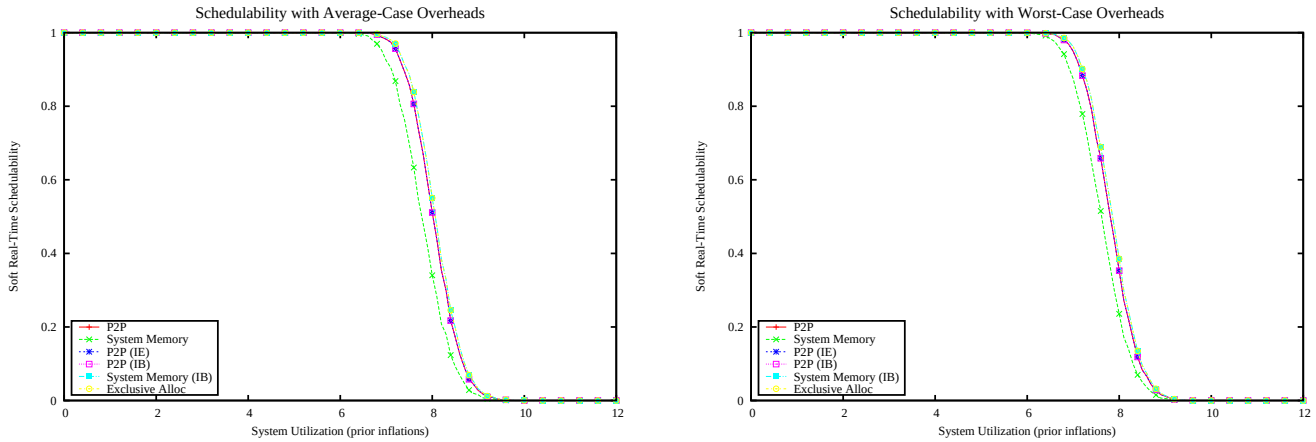

Figure 4241: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

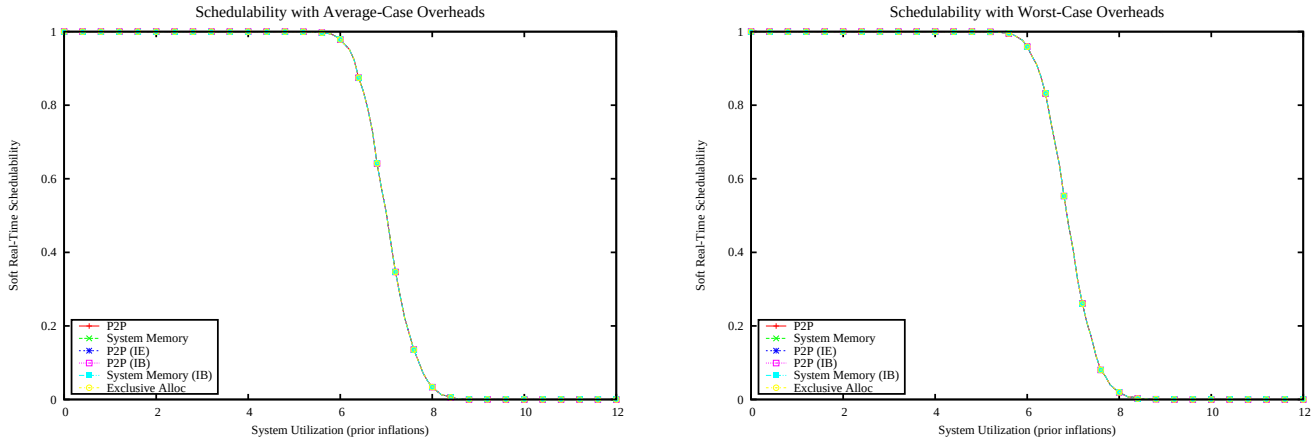

Figure 4242: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

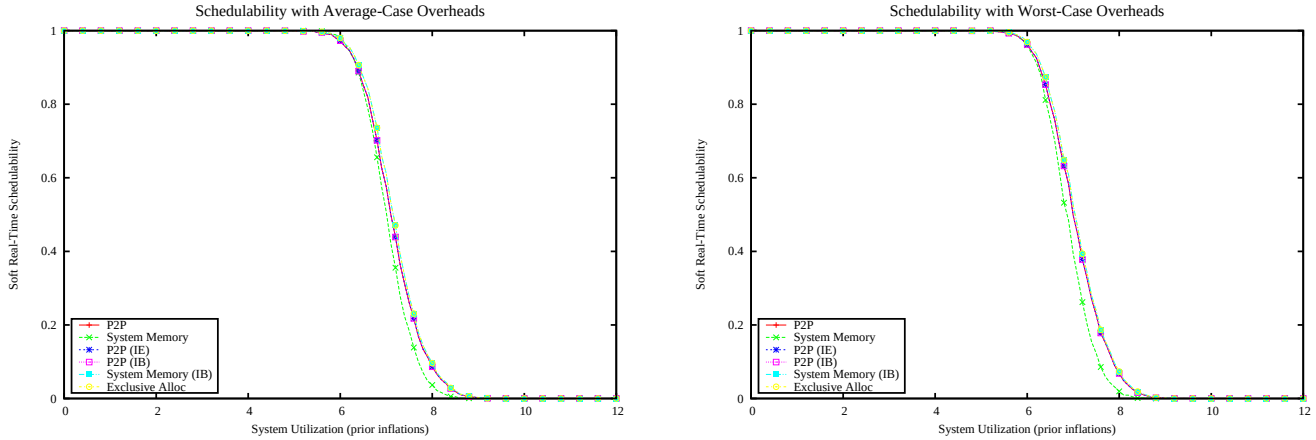

Figure 4243: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

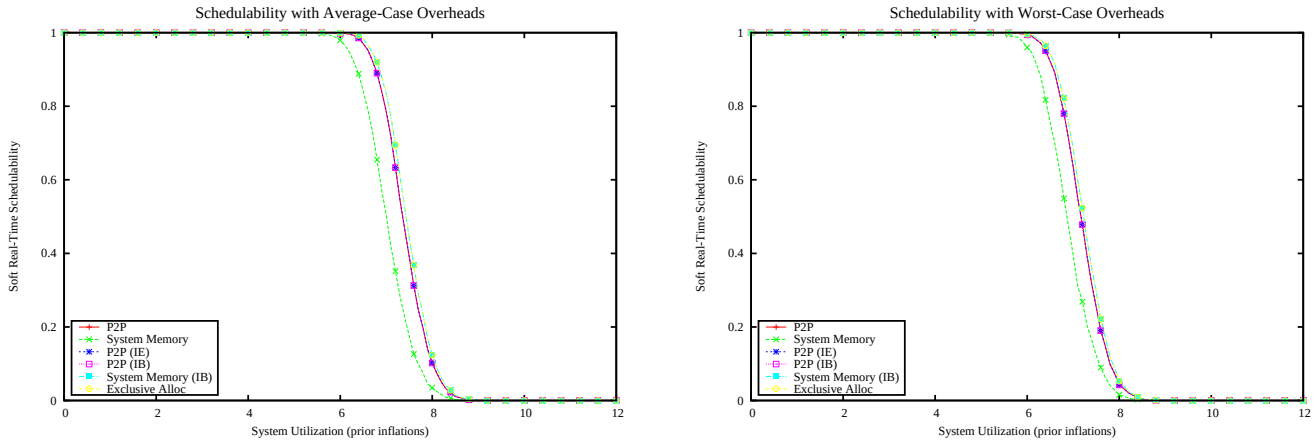

Figure 4244: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

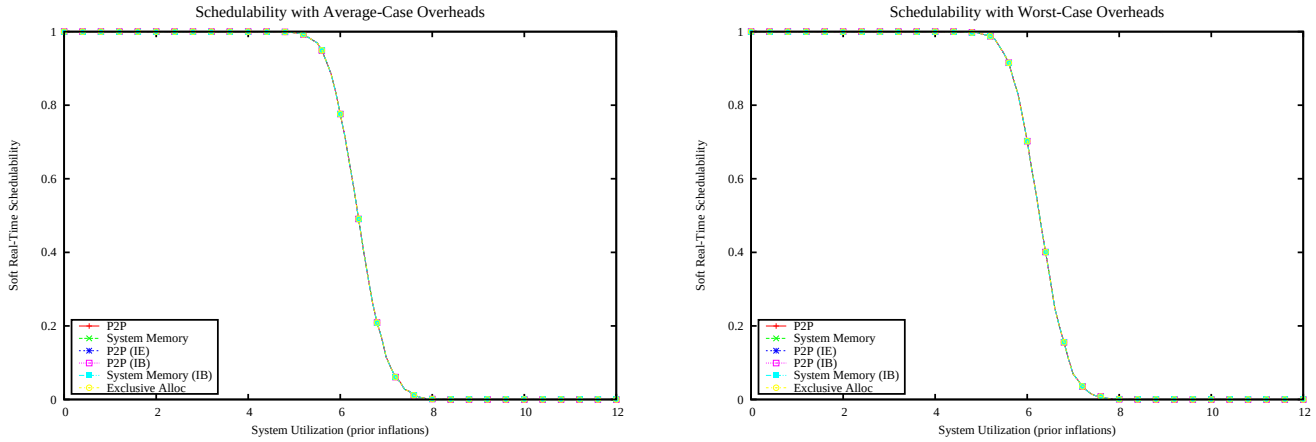

Figure 4245: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

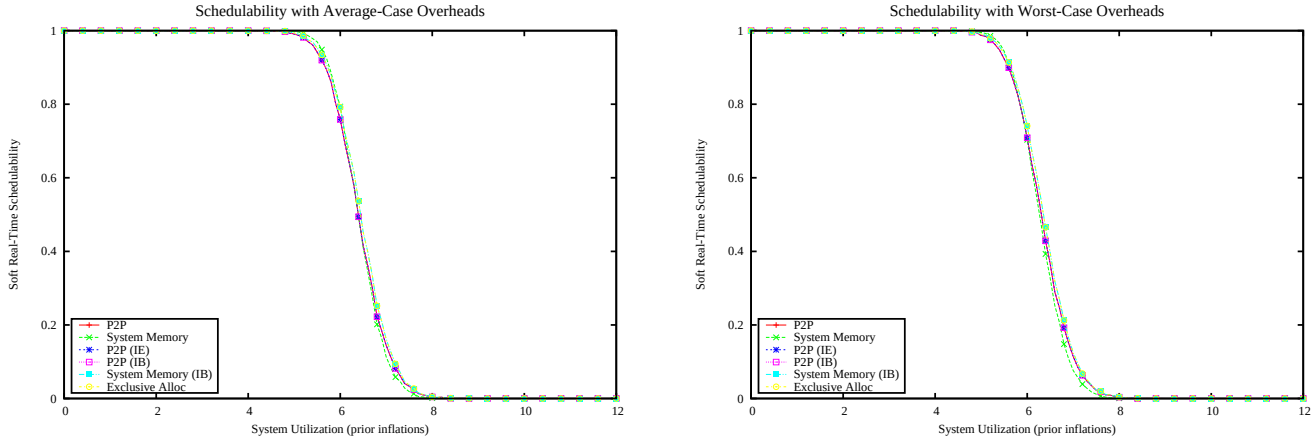

Figure 4246: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

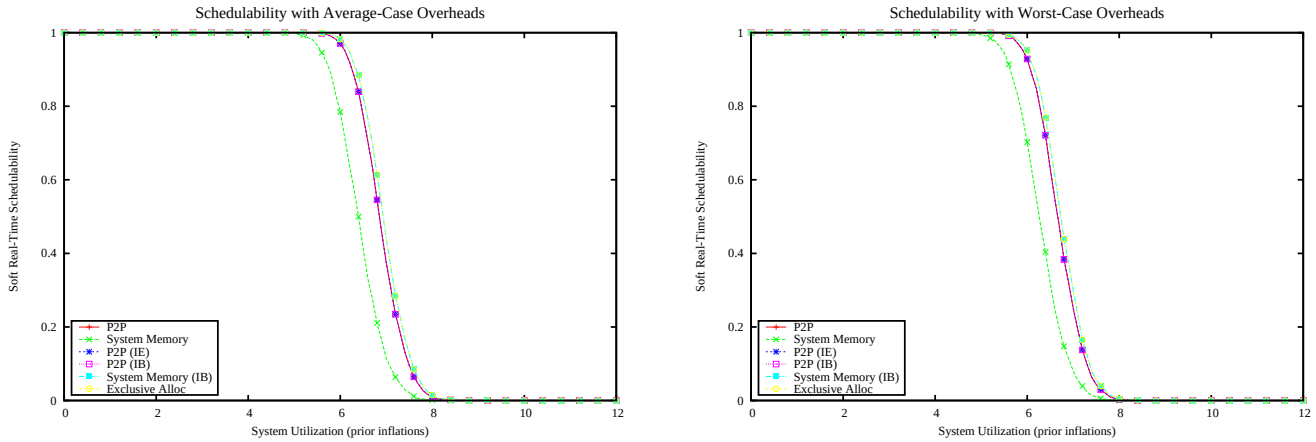

Figure 4247: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

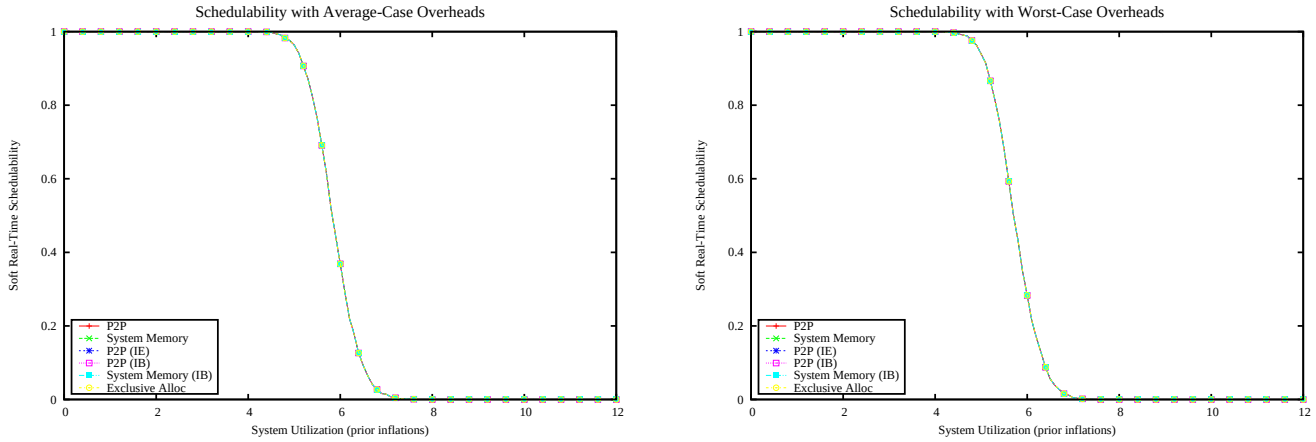

Figure 4248: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

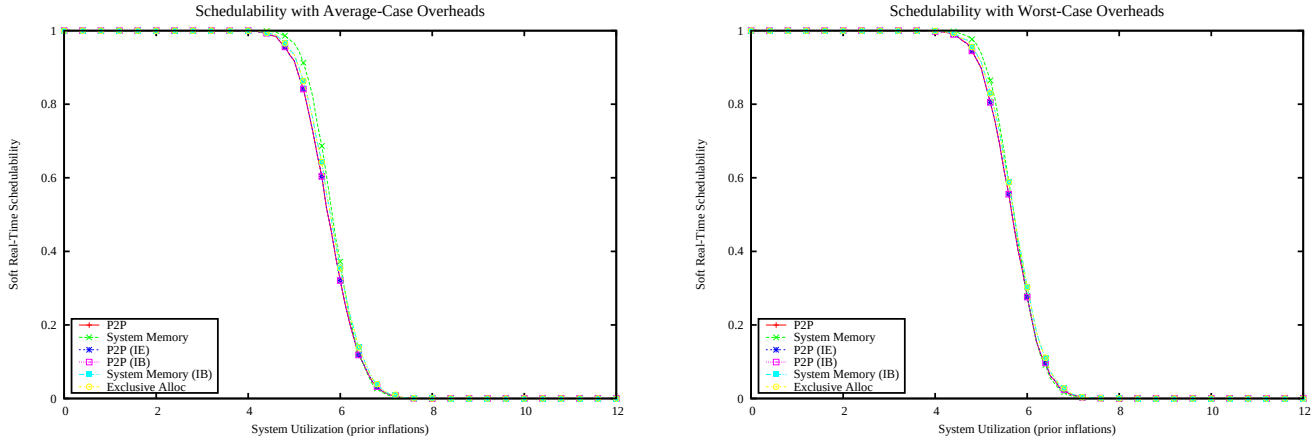

Figure 4249: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

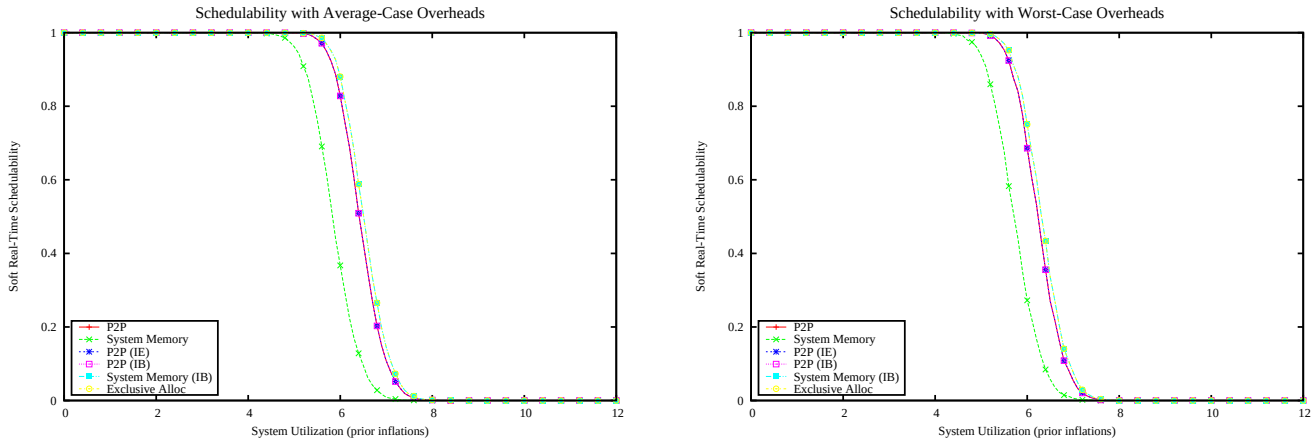

Figure 4250: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

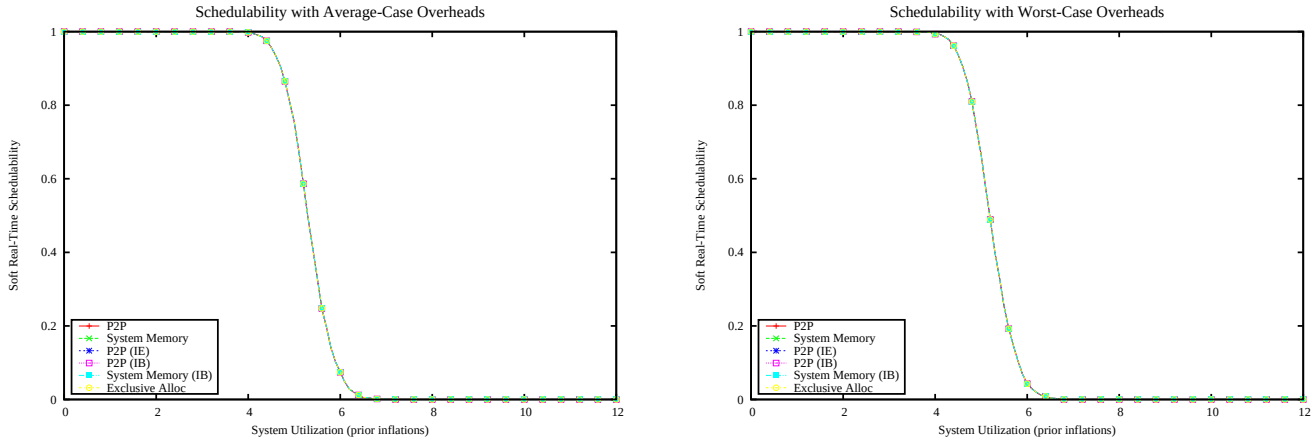

Figure 4251: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

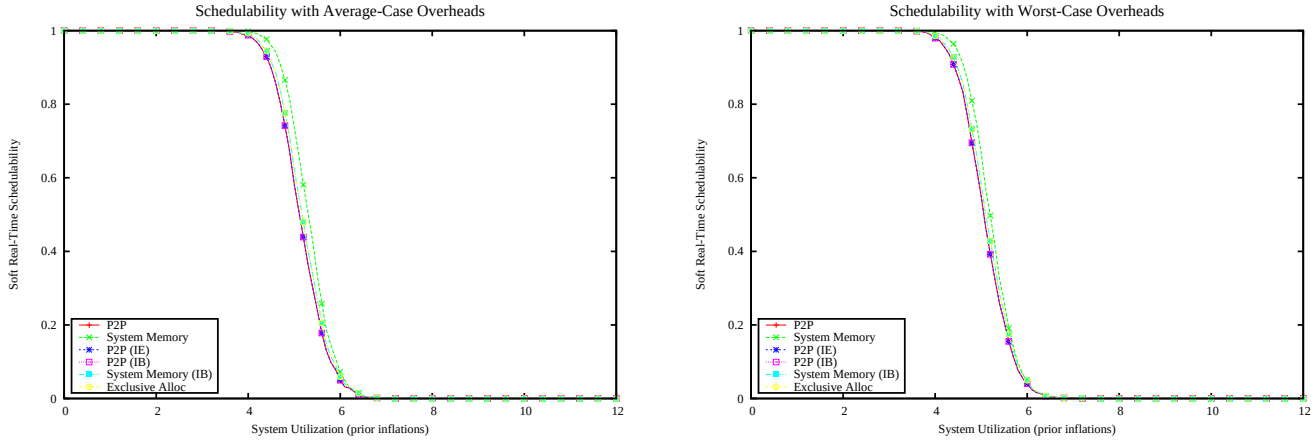

Figure 4252: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

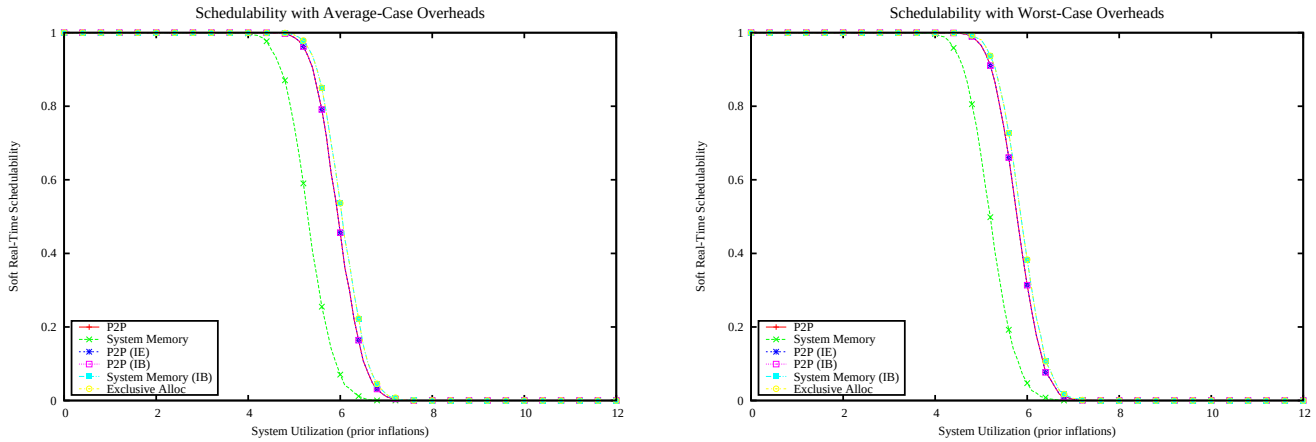

Figure 4253: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

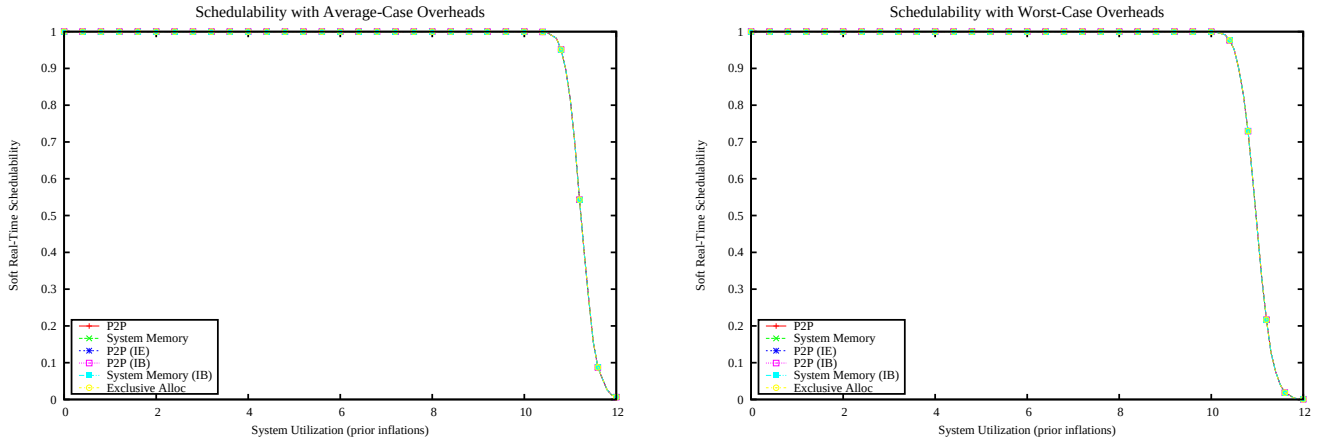

Figure 4254: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

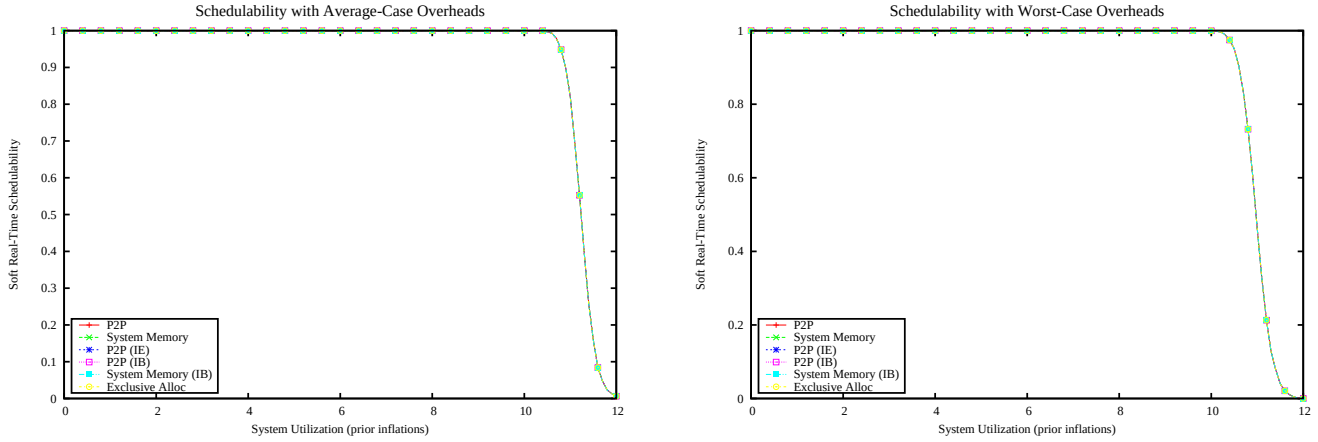

Figure 4255: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

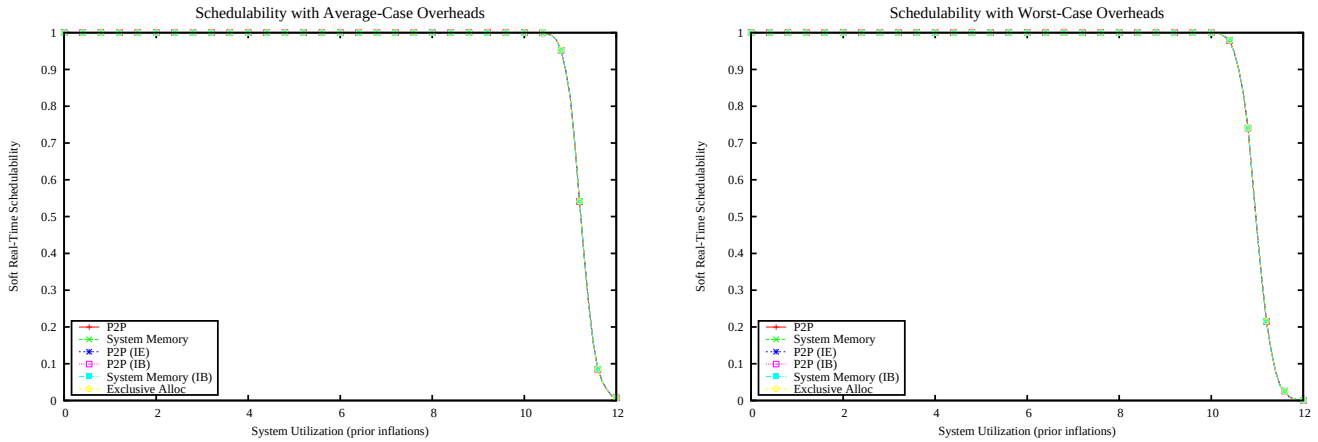

Figure 4256: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

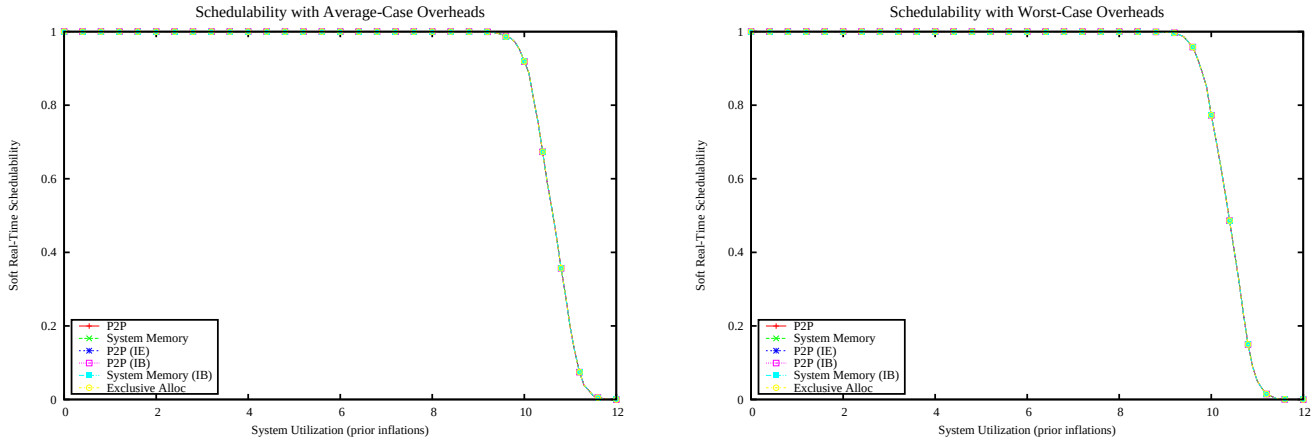

Figure 4257: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

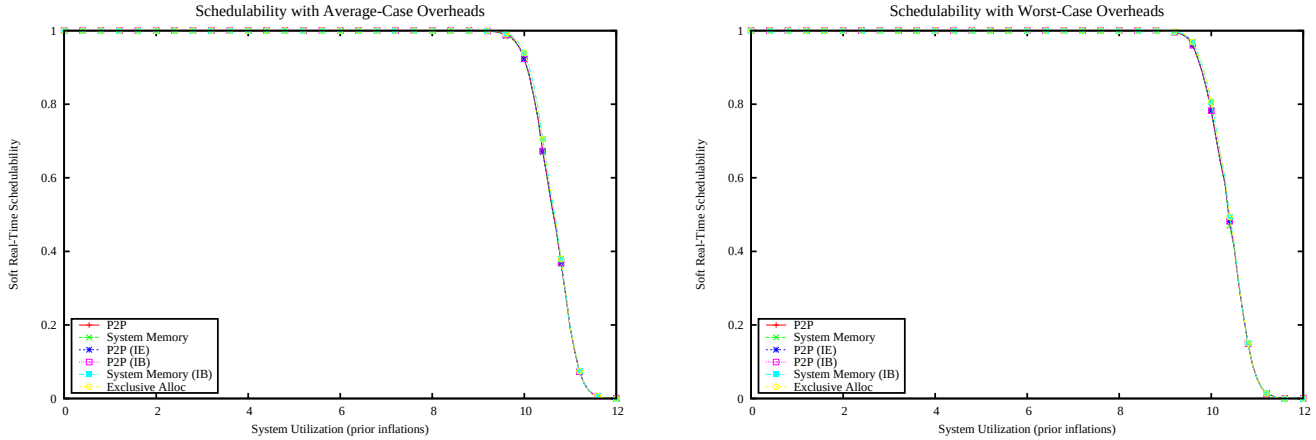

Figure 4258: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

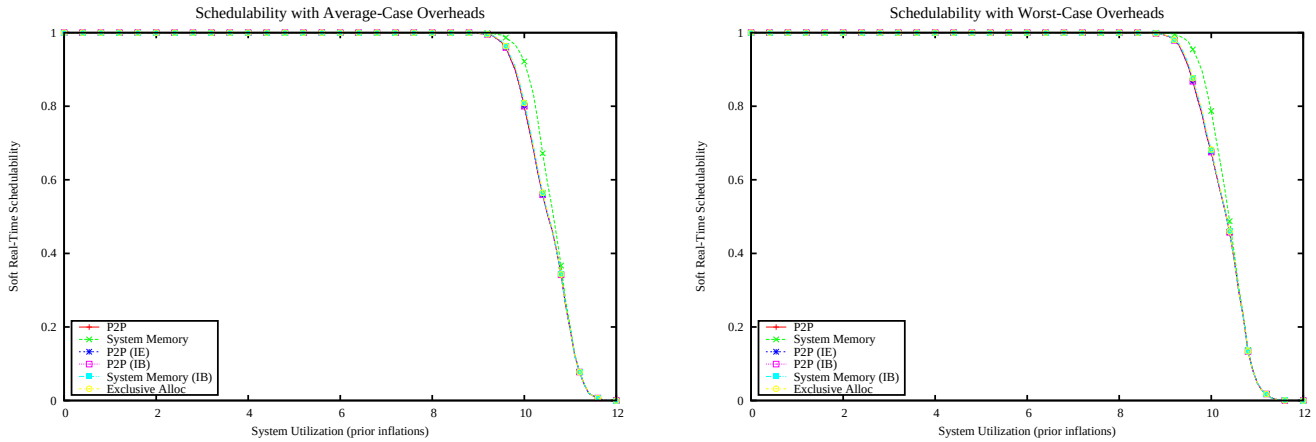

Figure 4259: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

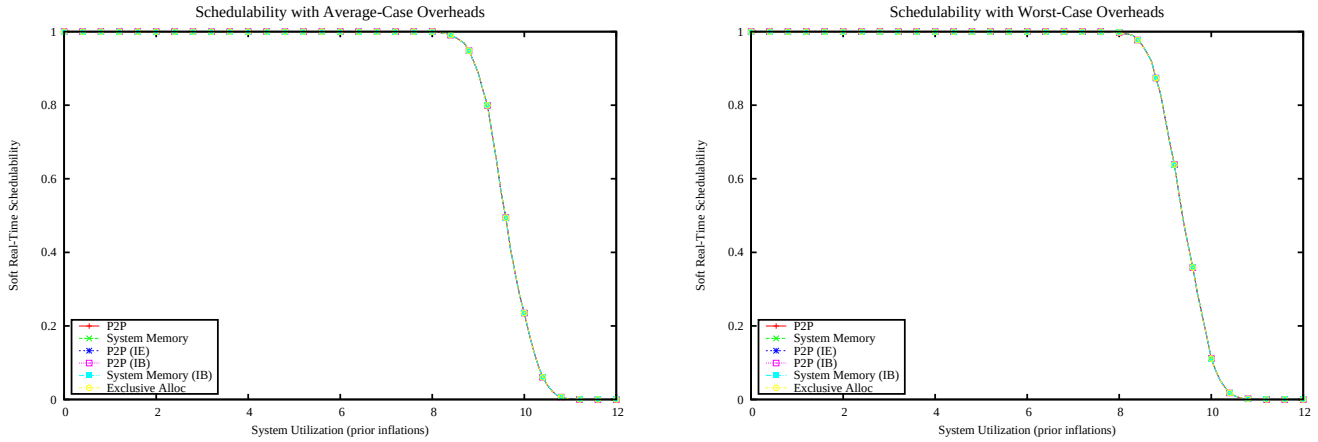

Figure 4260: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

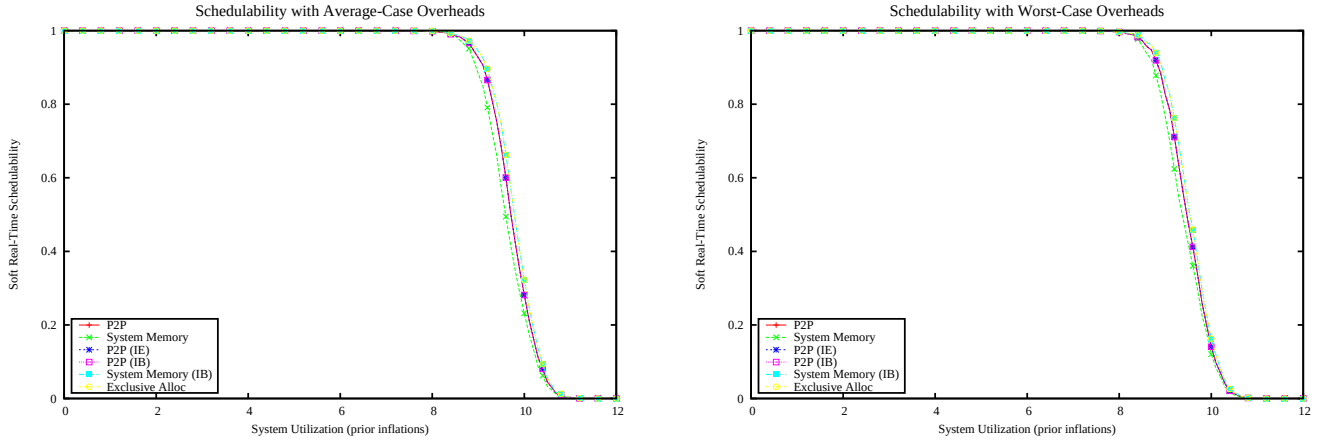

Figure 4261: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

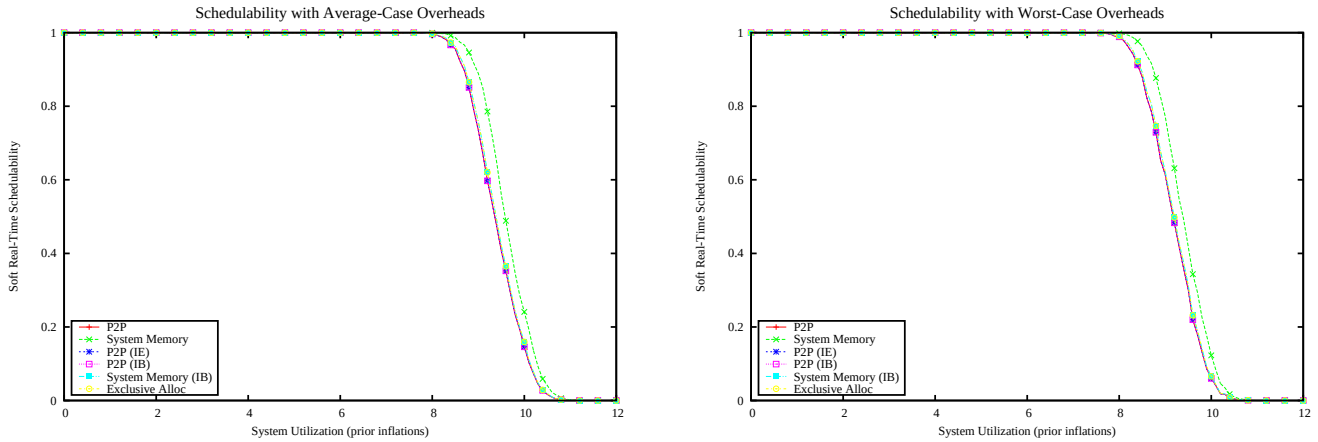

Figure 4262: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

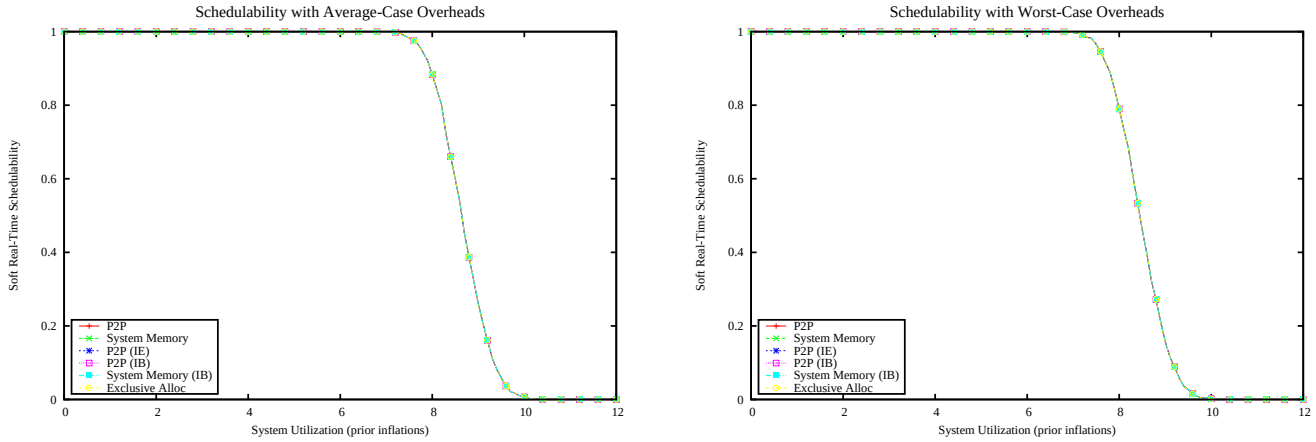

Figure 4263: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

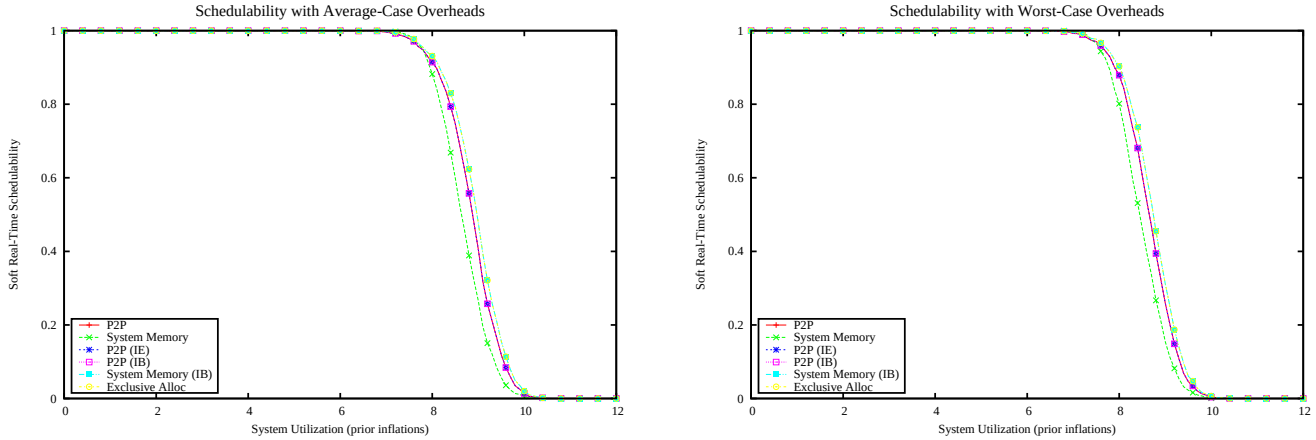

Figure 4264: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

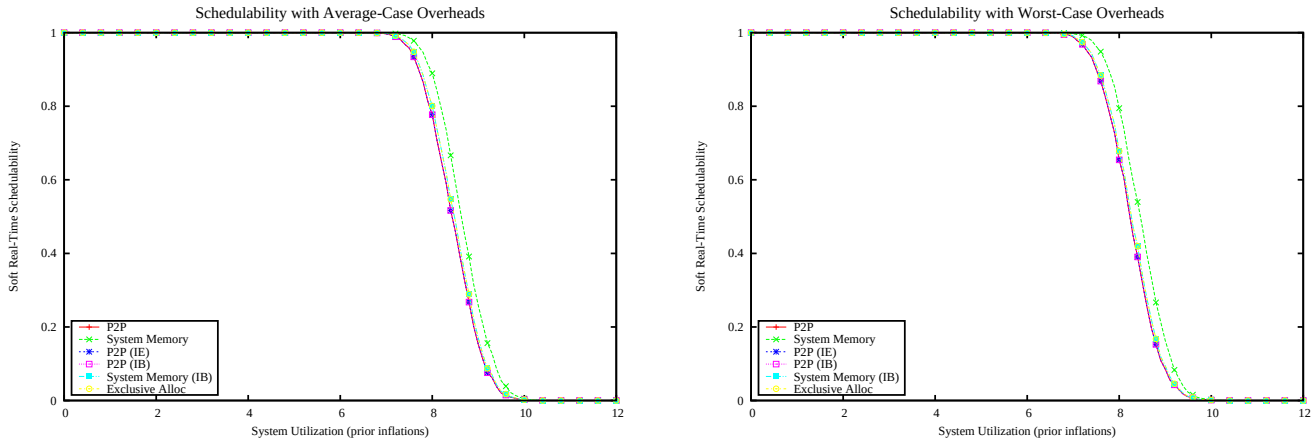

Figure 4265: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

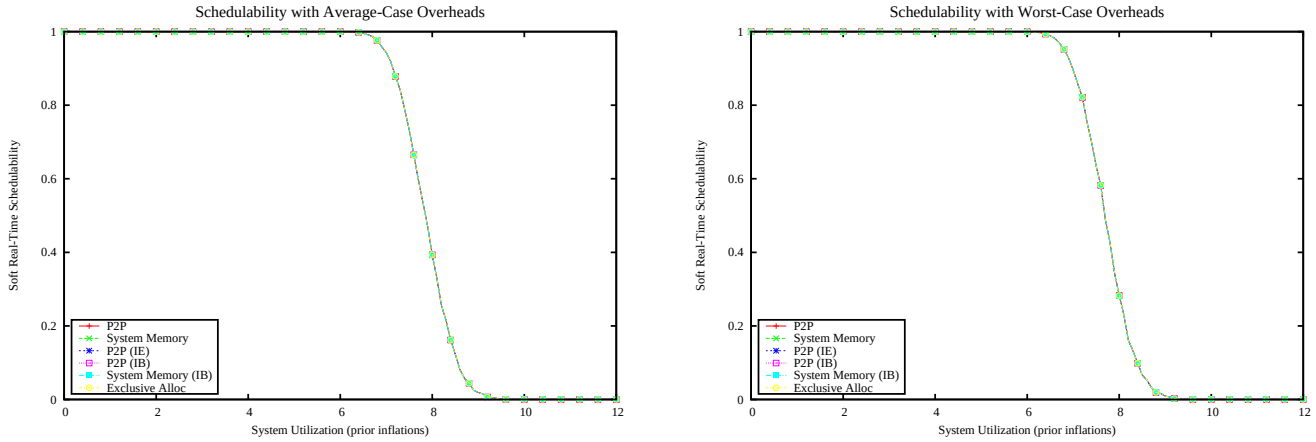

Figure 4266: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

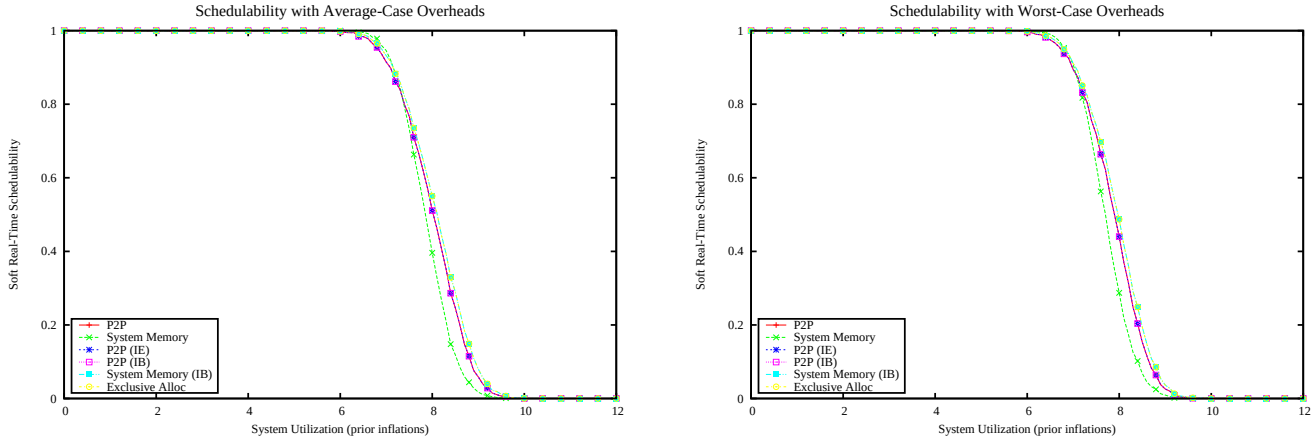

Figure 4267: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

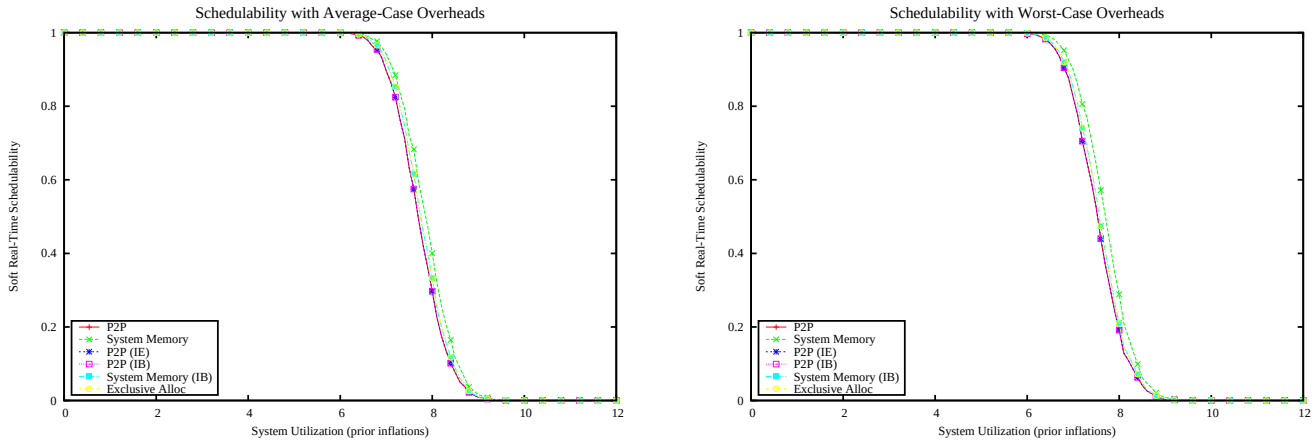

Figure 4268: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

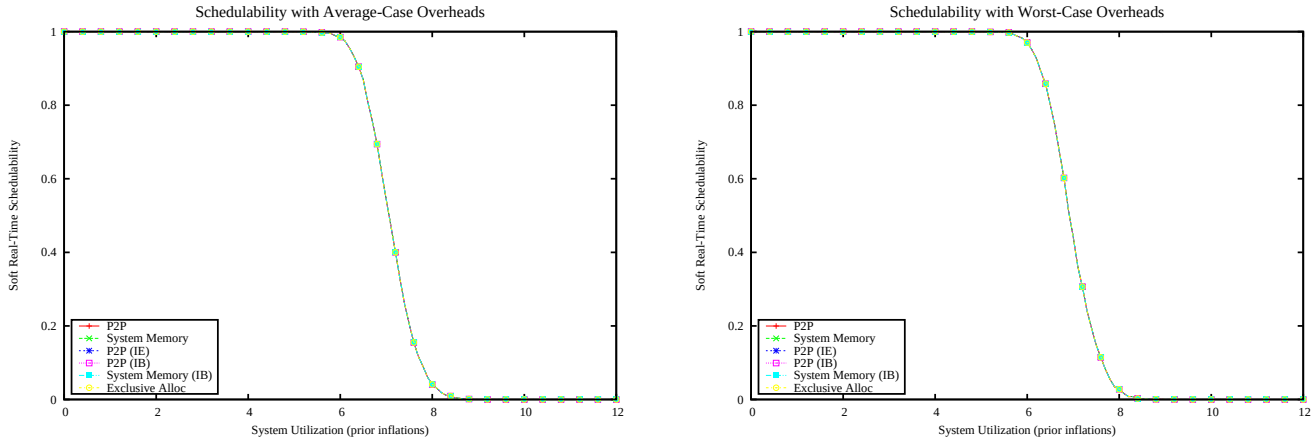

Figure 4269: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

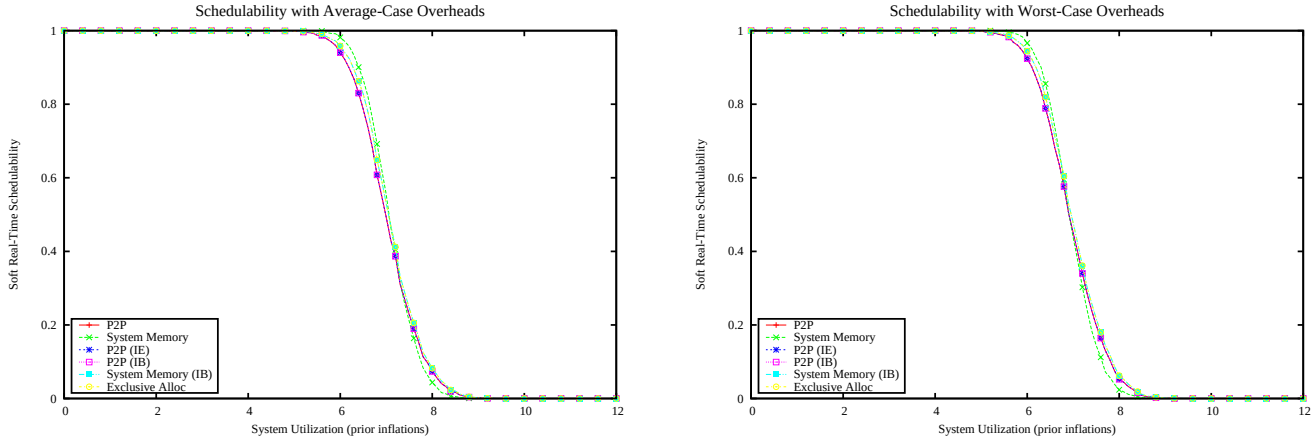

Figure 4270: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

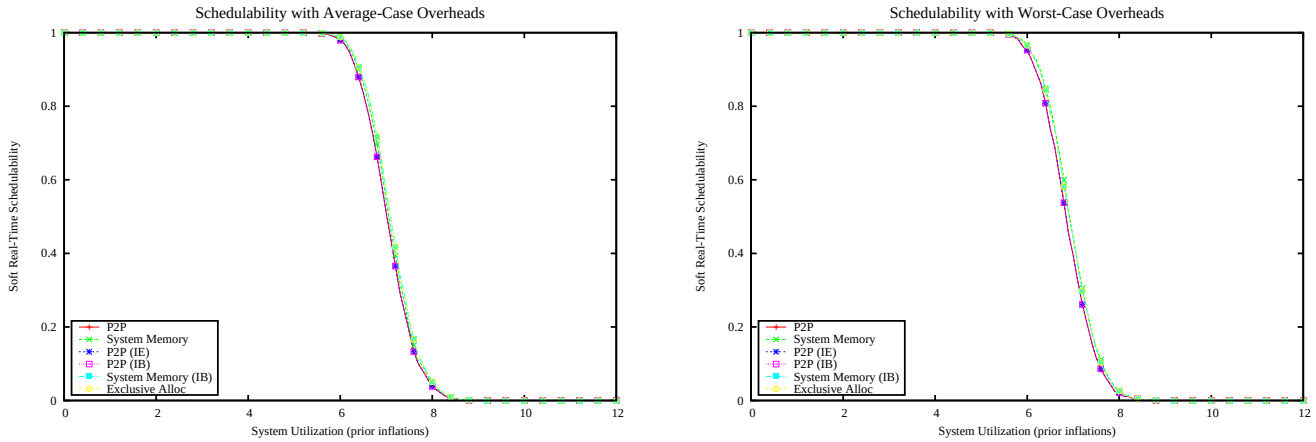

Figure 4271: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

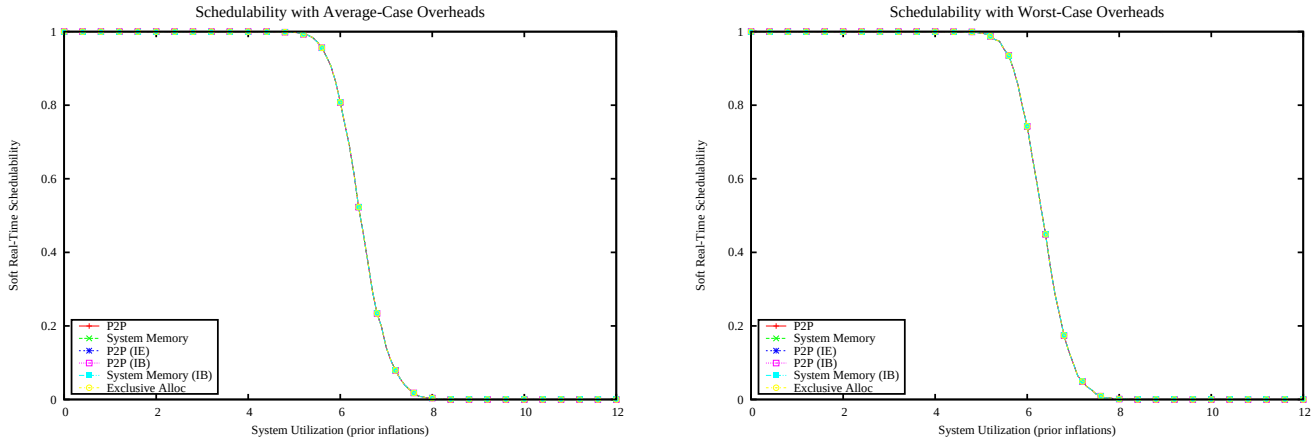

Figure 4272: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

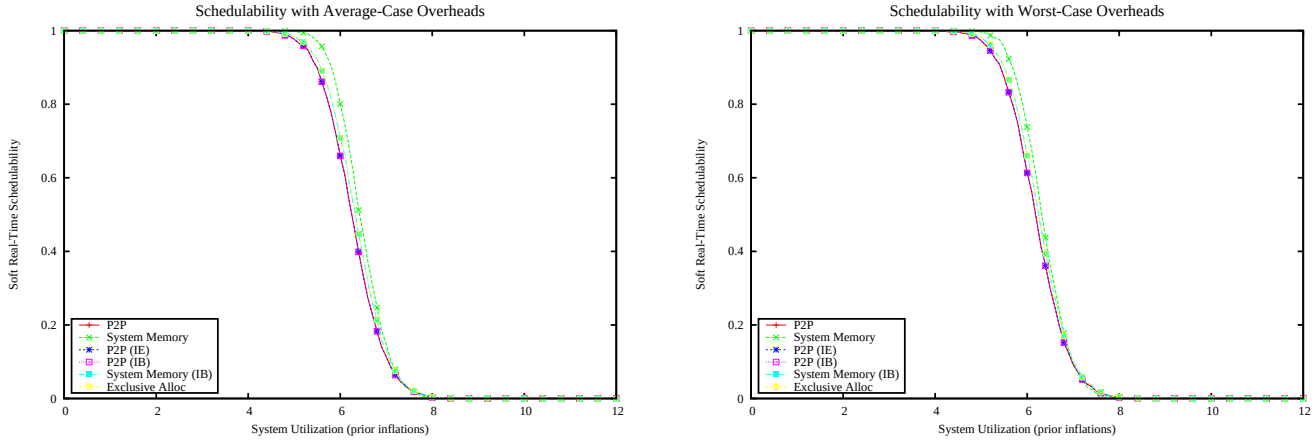

Figure 4273: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

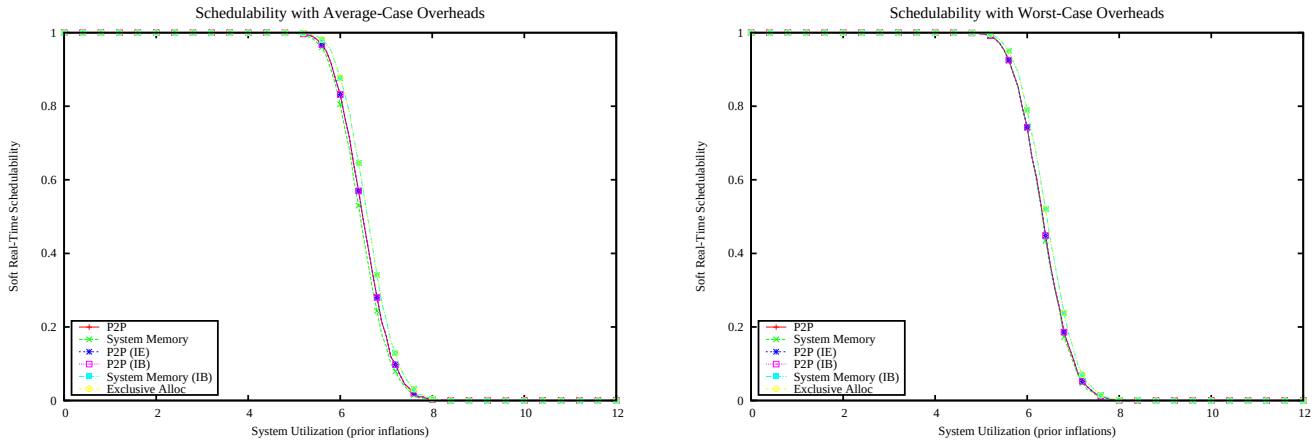

Figure 4274: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

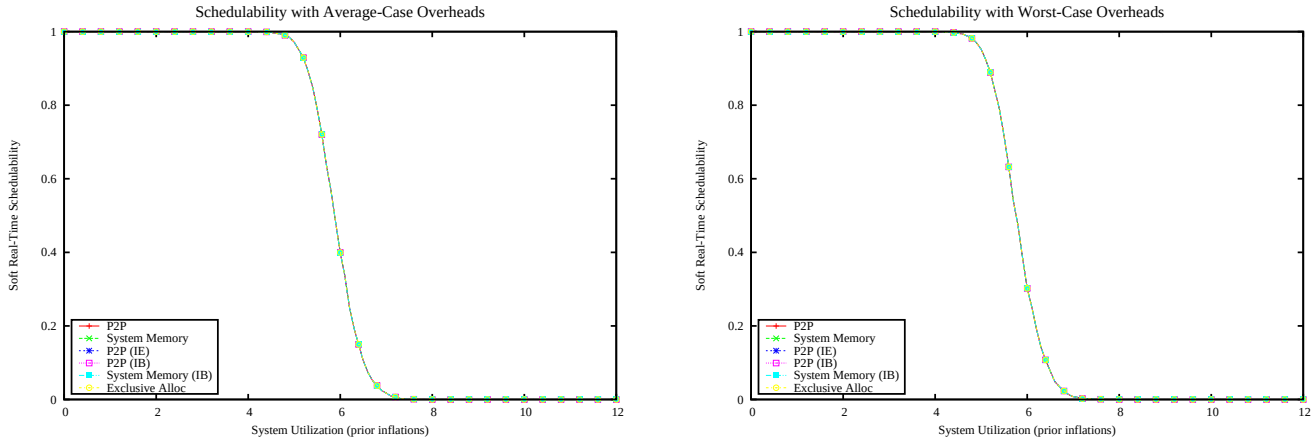

Figure 4275: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

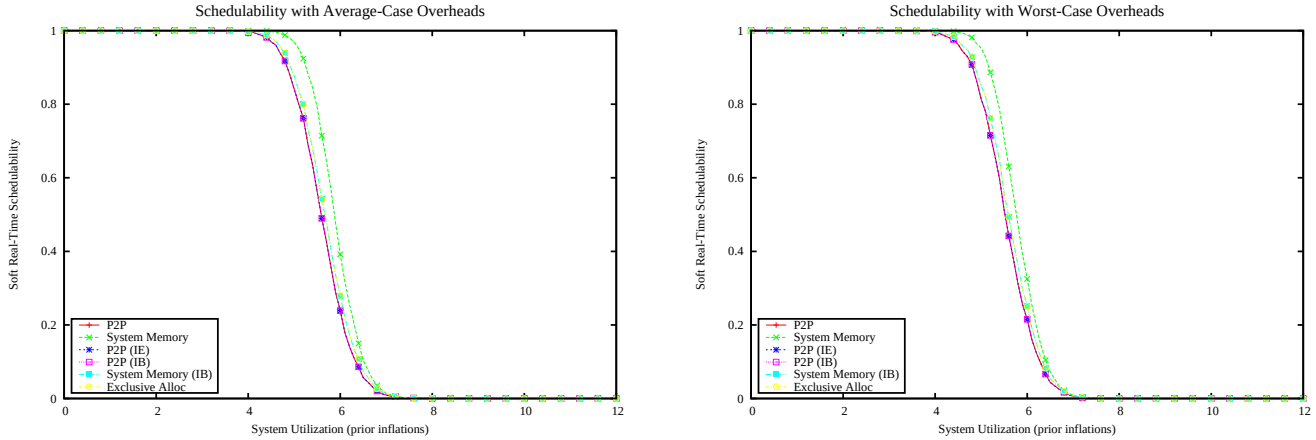

Figure 4276: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

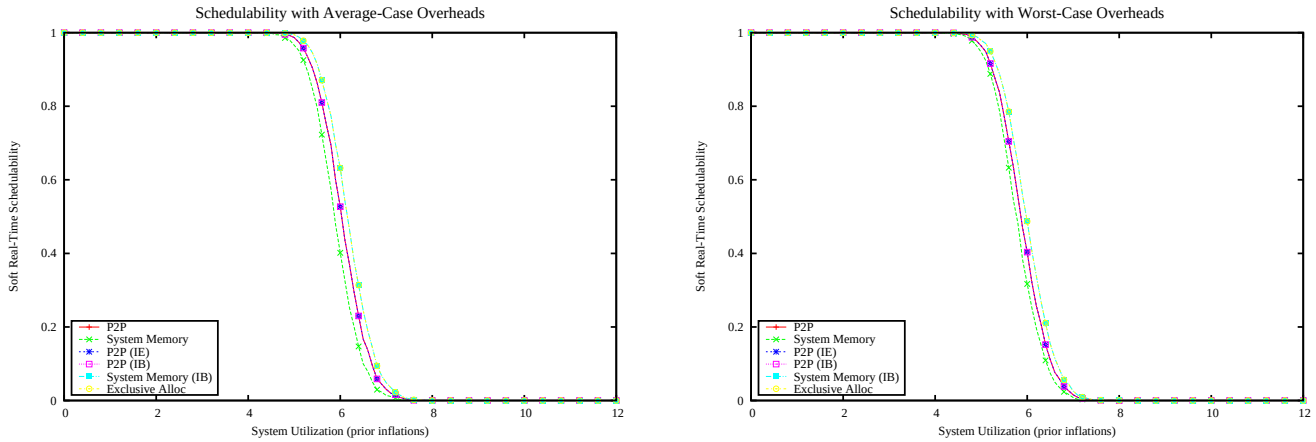

Figure 4277: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

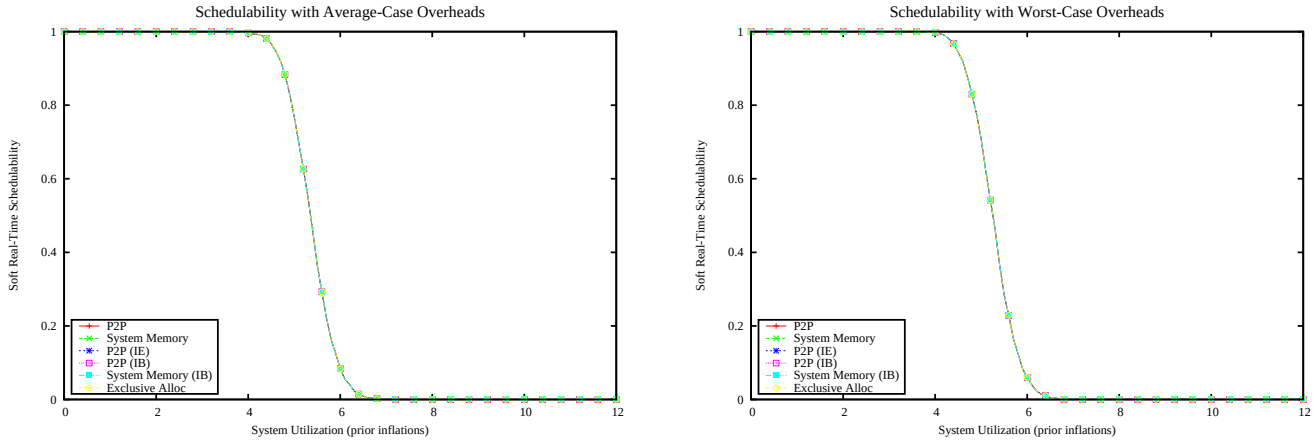

Figure 4278: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

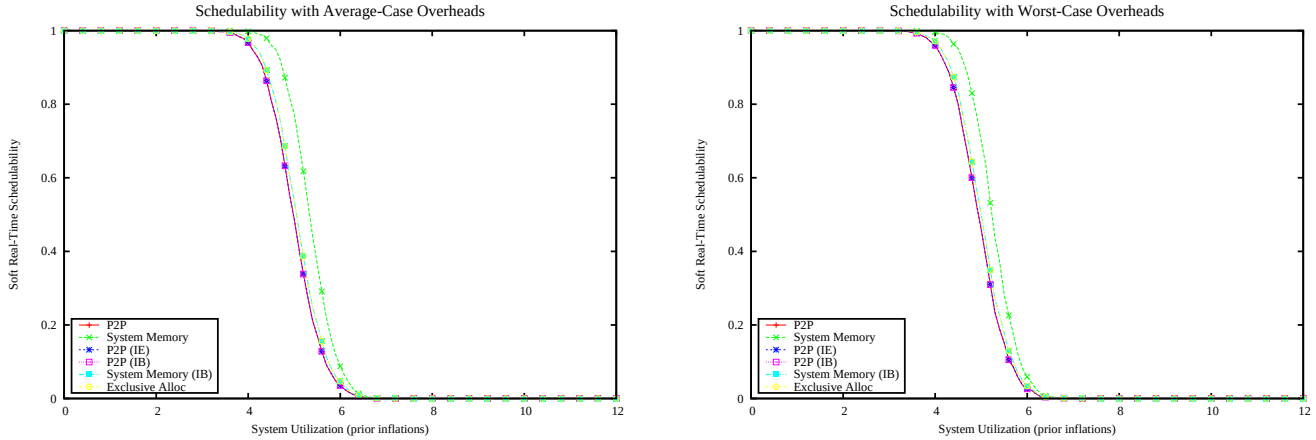

Figure 4279: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

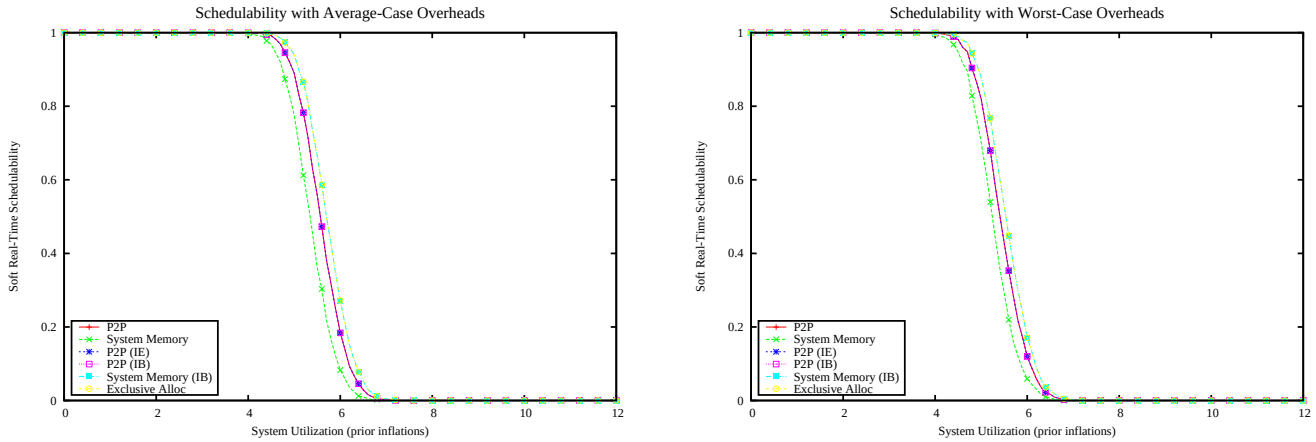

Figure 4280: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

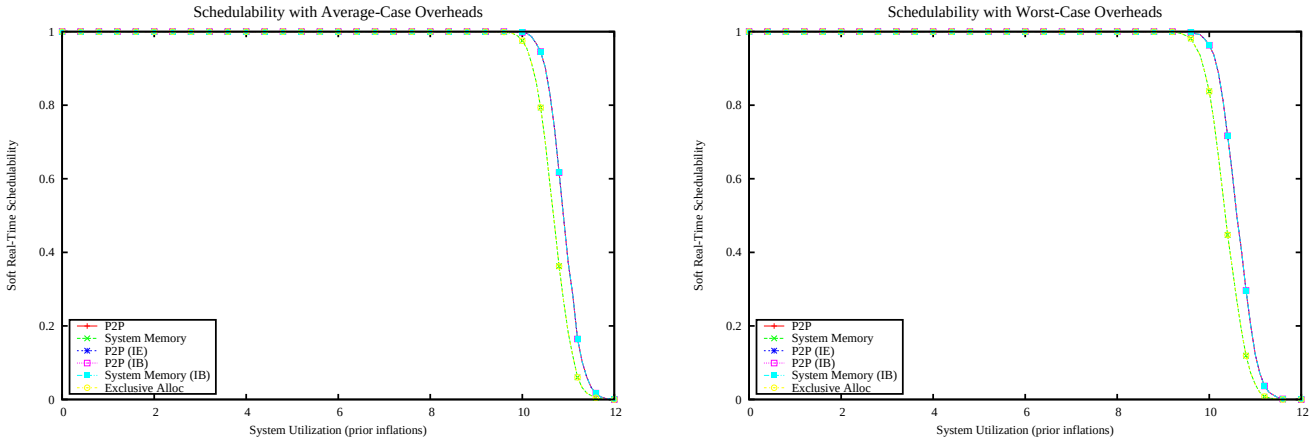

Figure 4281: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

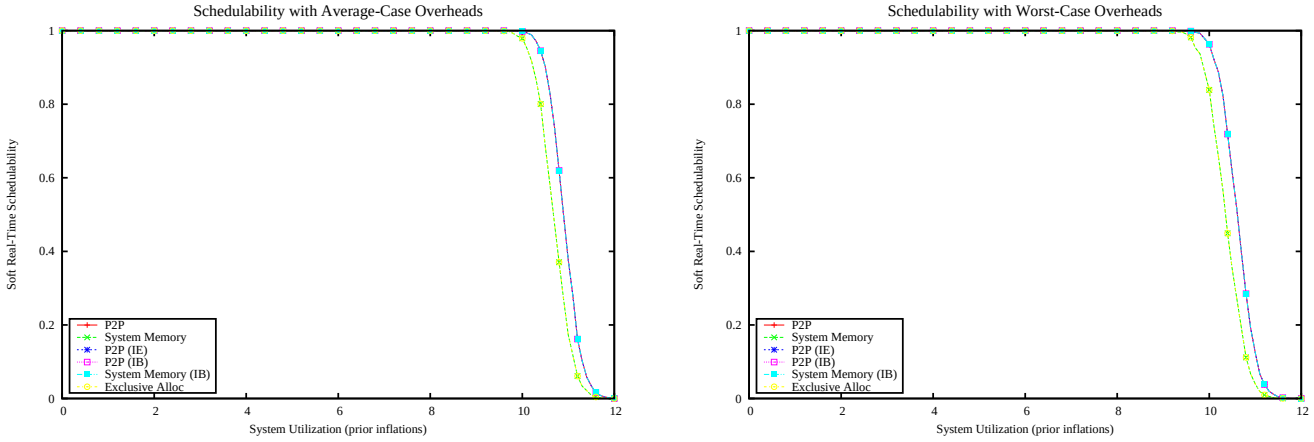

Figure 4282: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

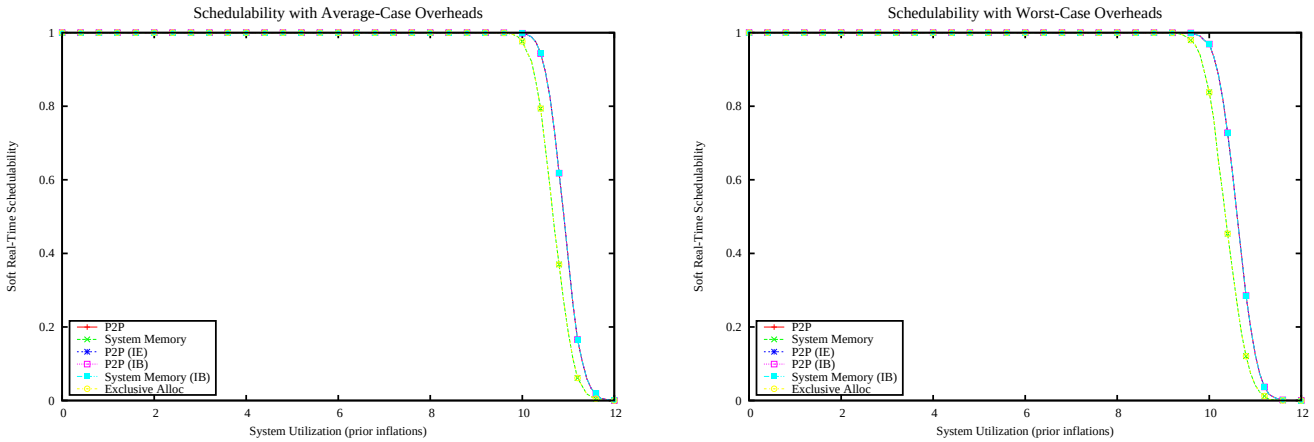

Figure 4283: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

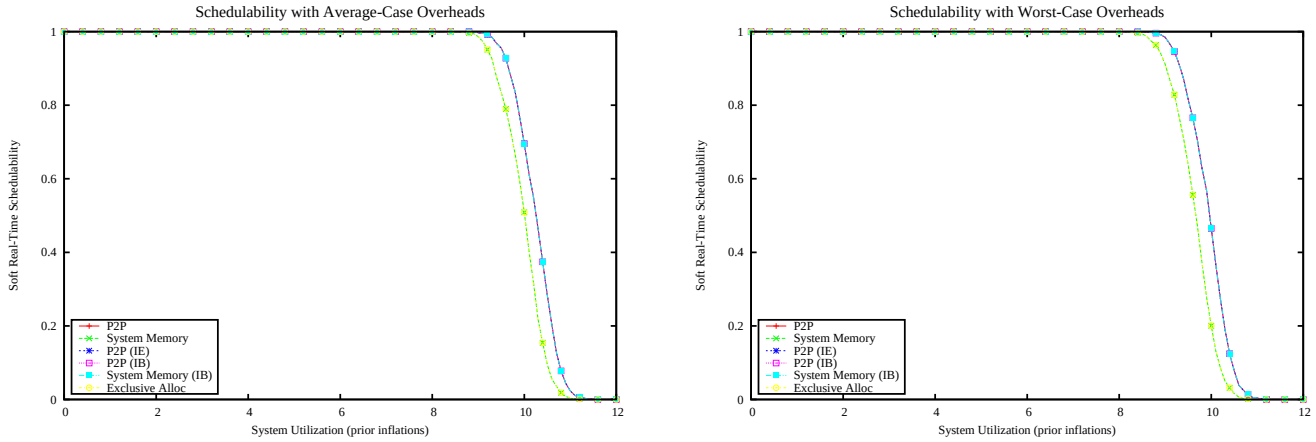

Figure 4284: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

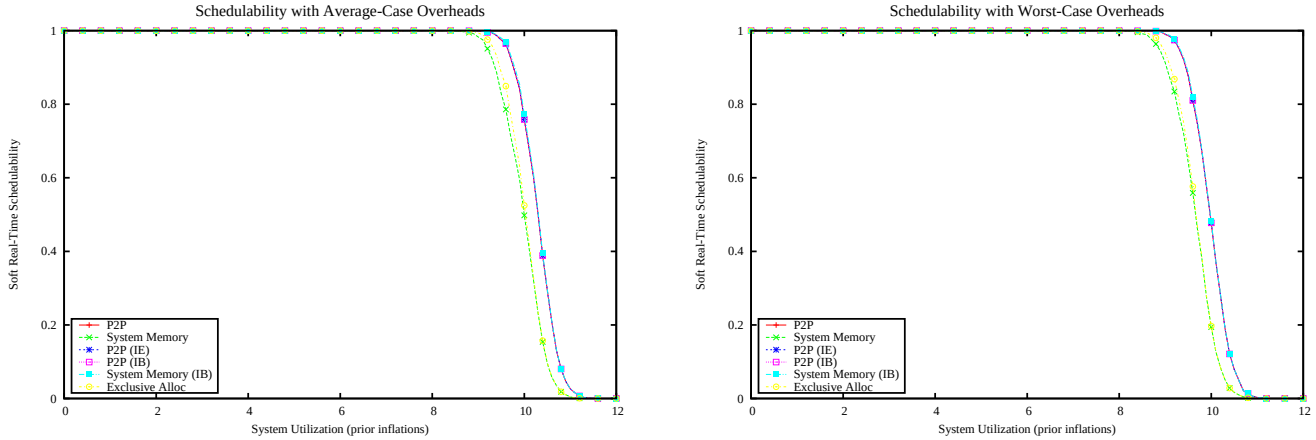

Figure 4285: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

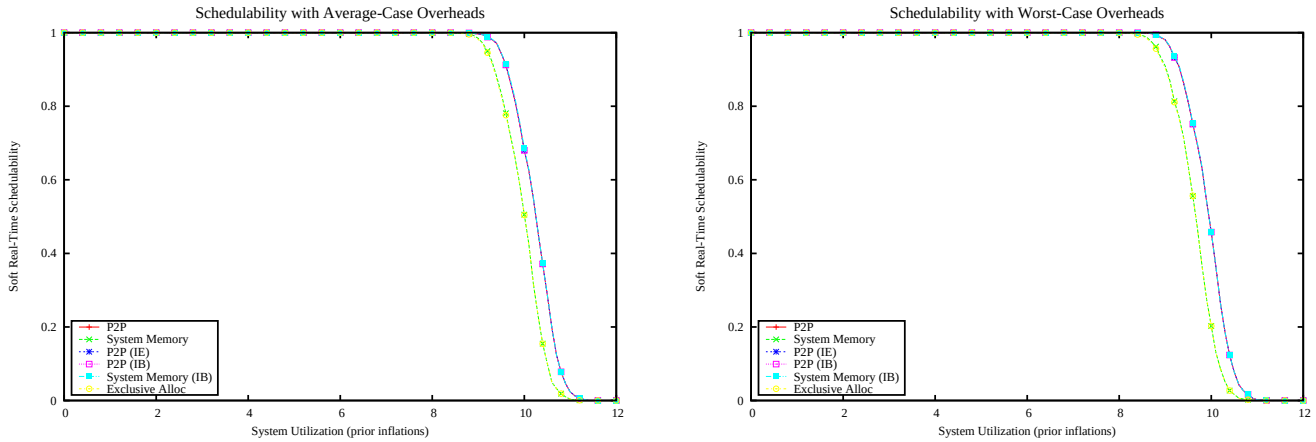

Figure 4286: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

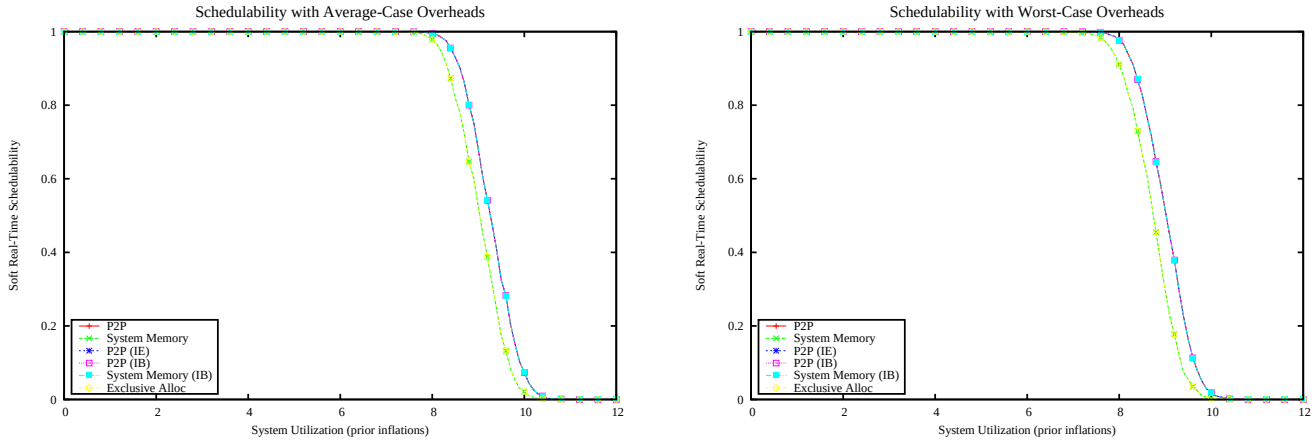

Figure 4287: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

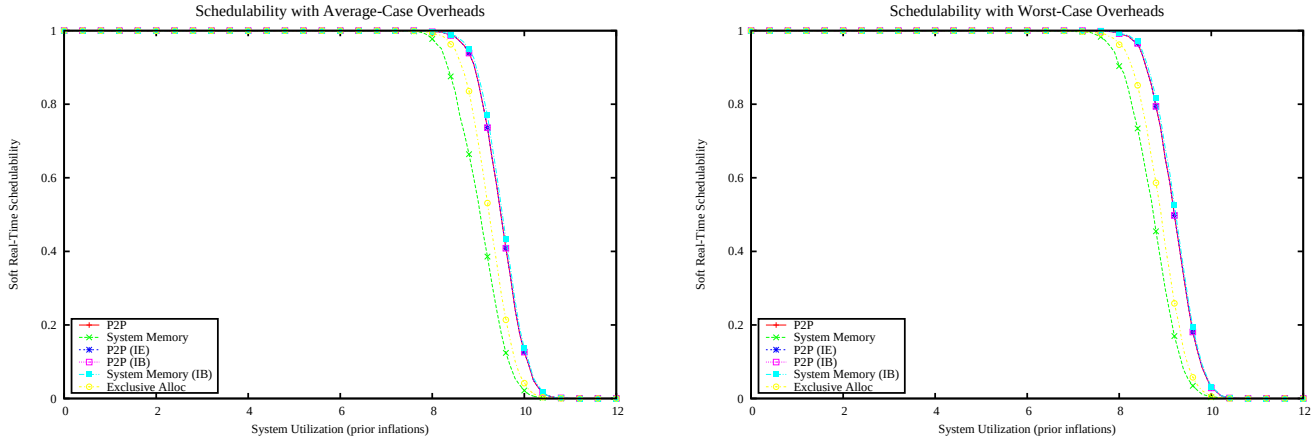

Figure 4288: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

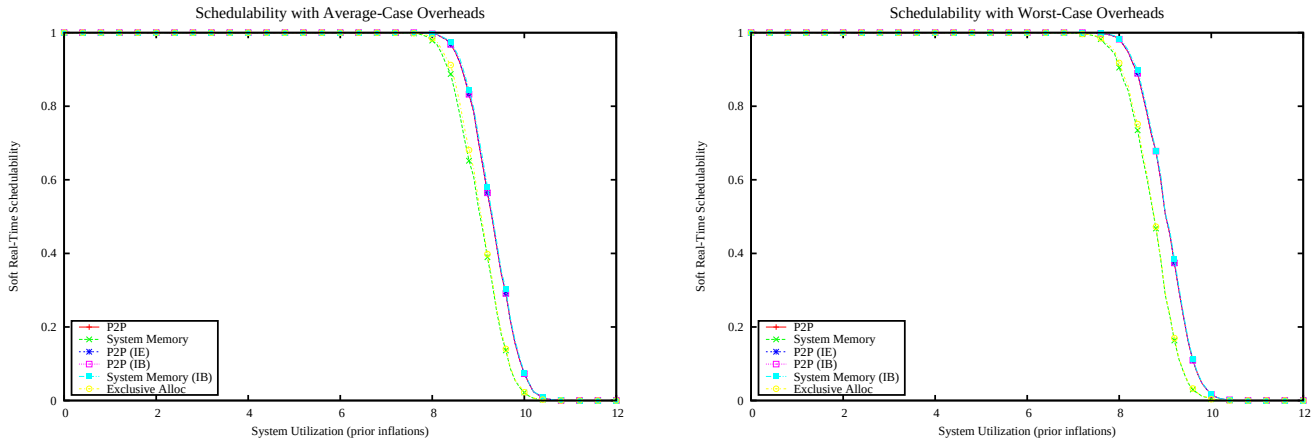

Figure 4289: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

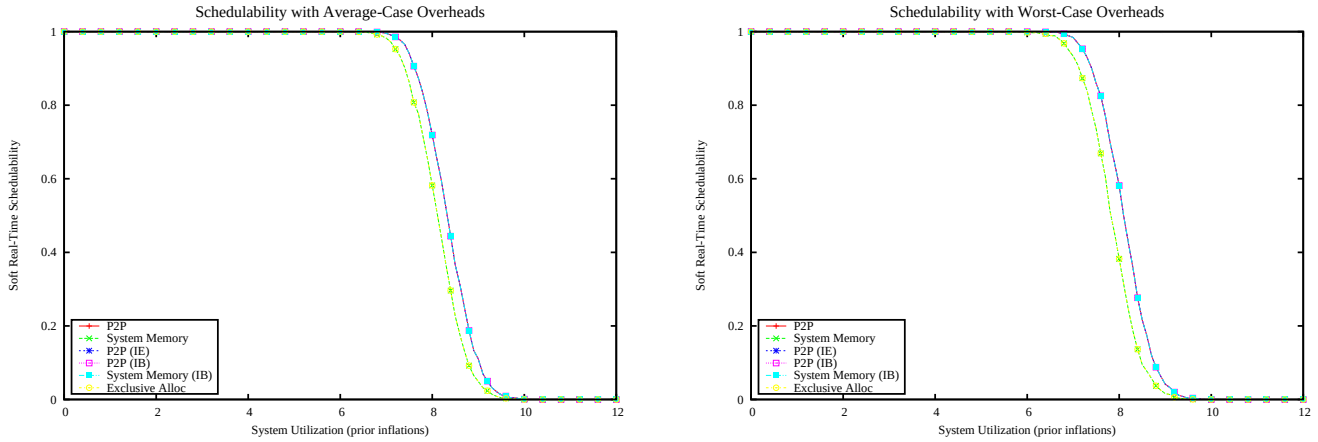

Figure 4290: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

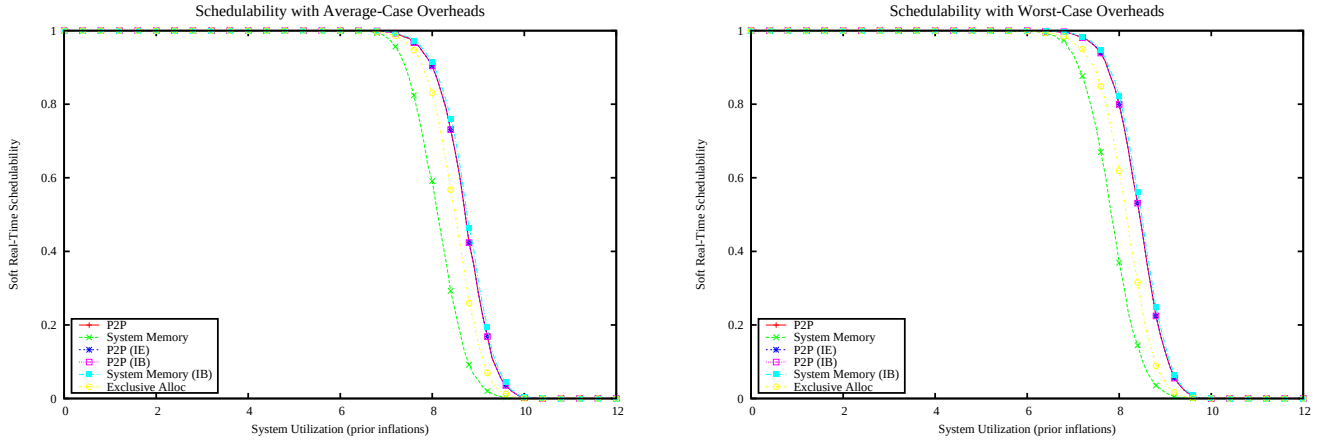

Figure 4291: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

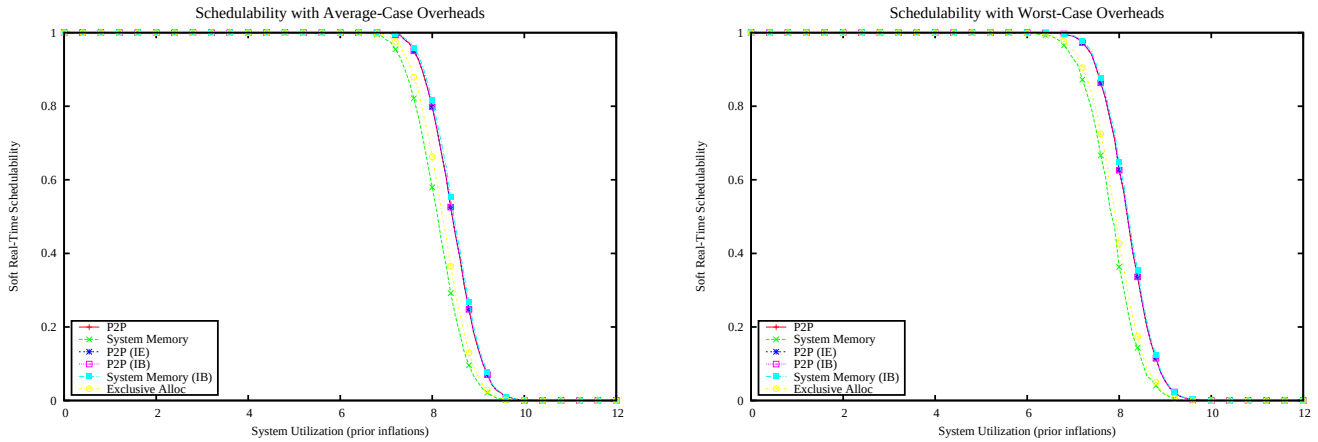

Figure 4292: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

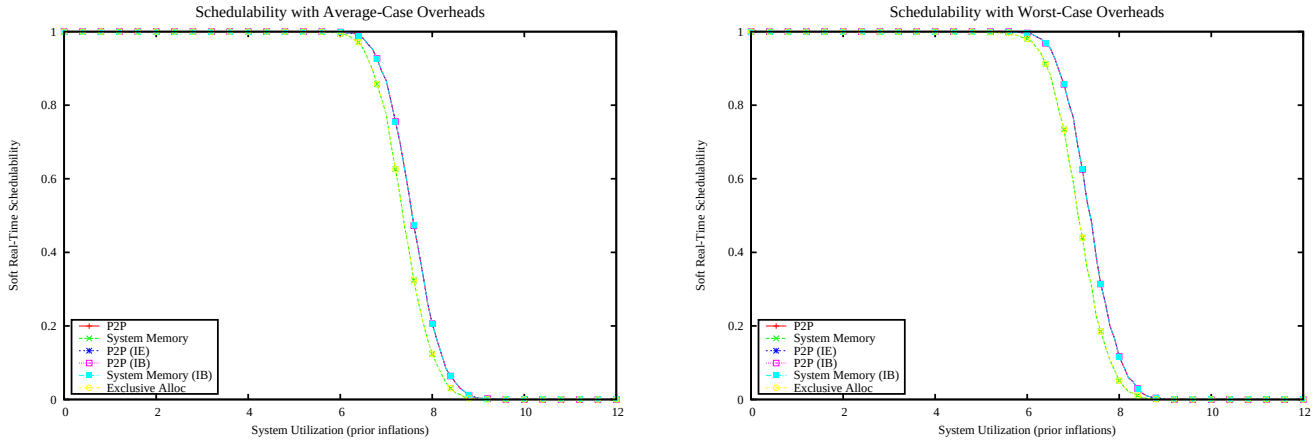

Figure 4293: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

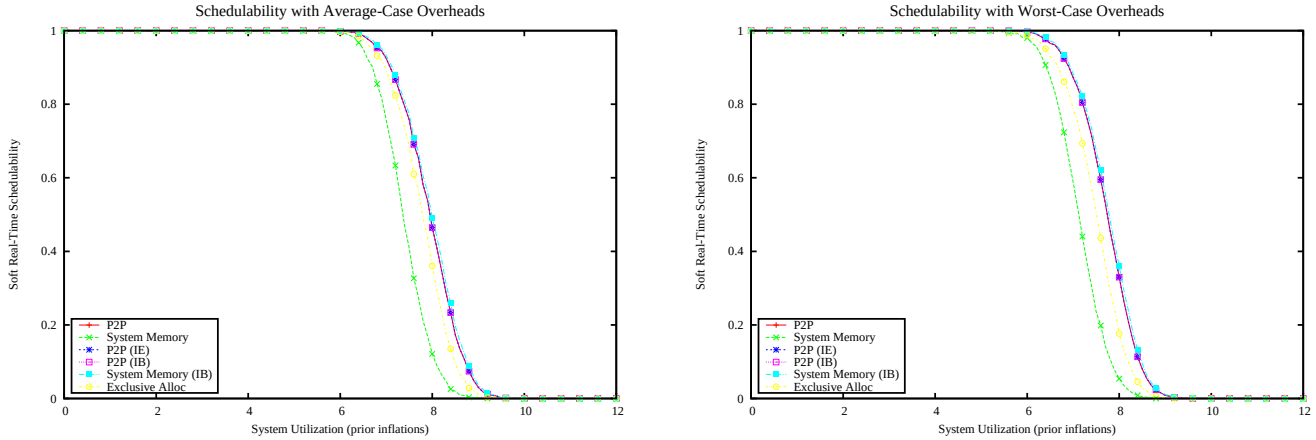

Figure 4294: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

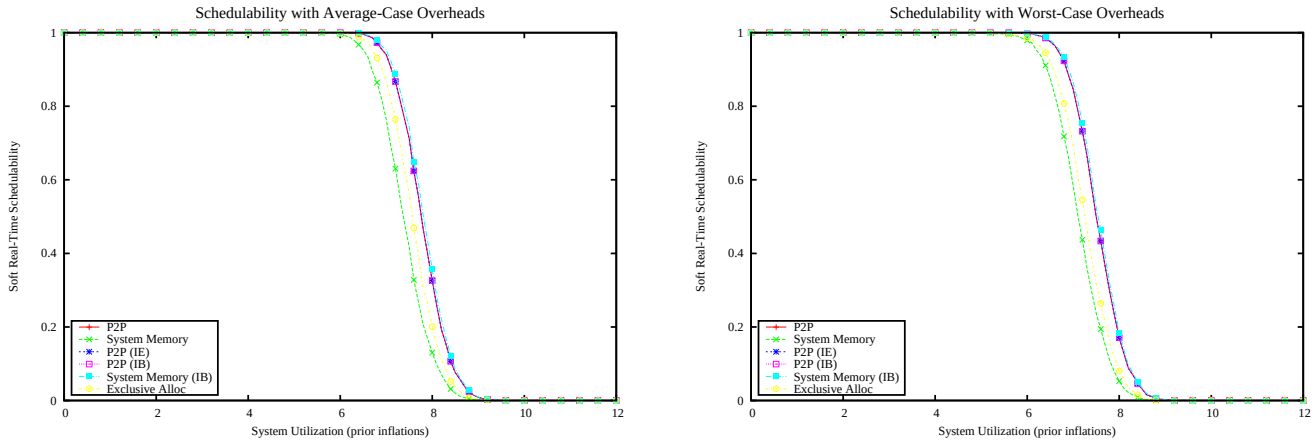

Figure 4295: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

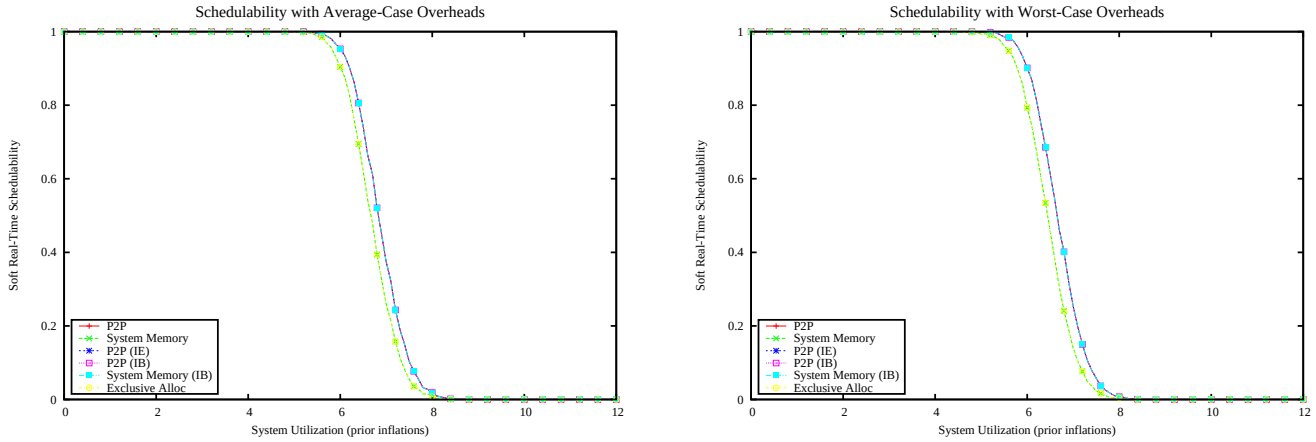

Figure 4296: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

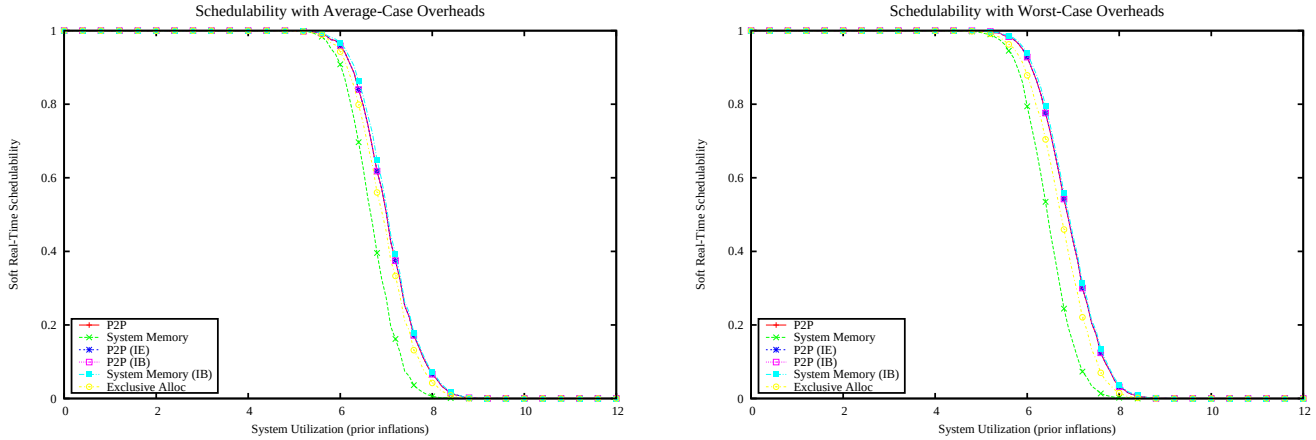

Figure 4297: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

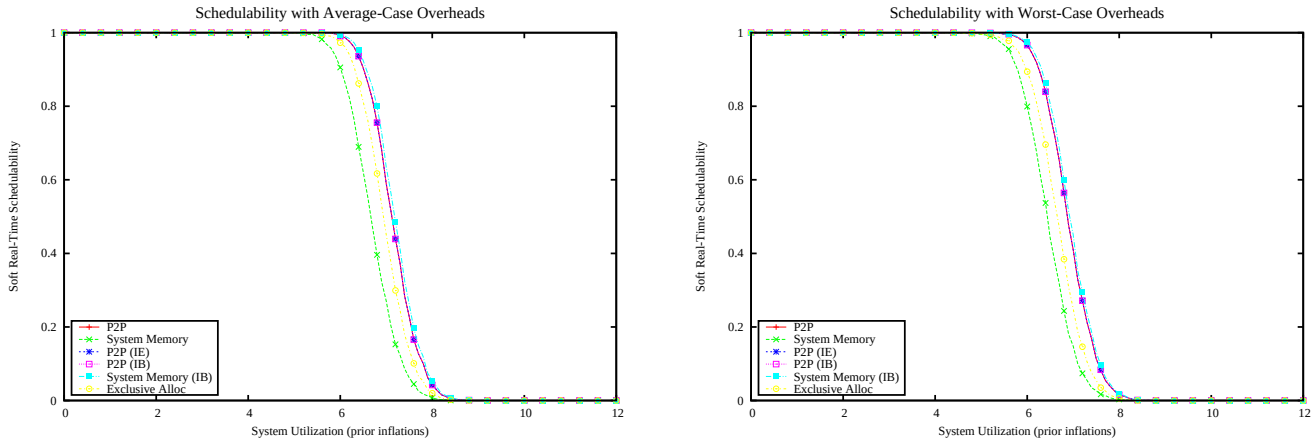

Figure 4298: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

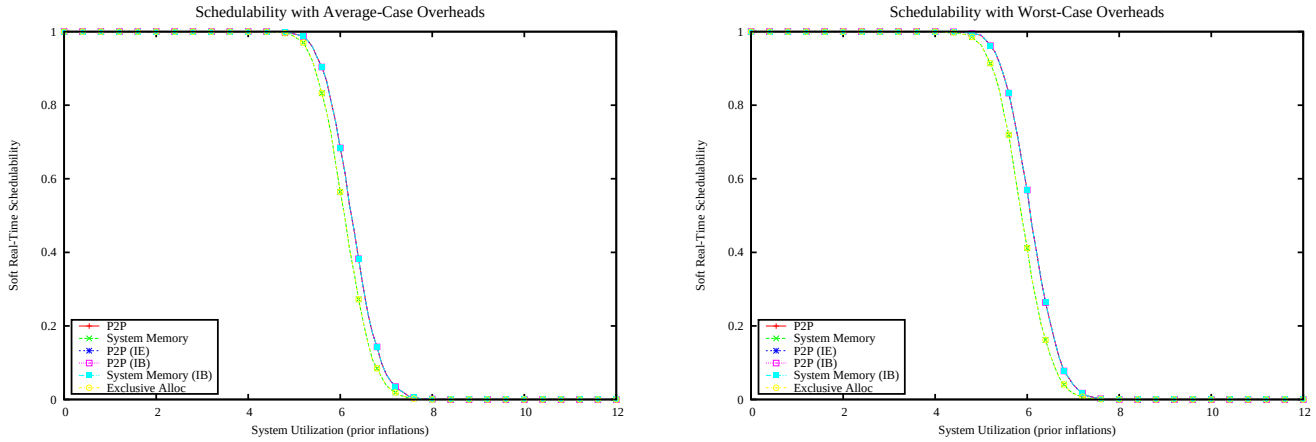

Figure 4299: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

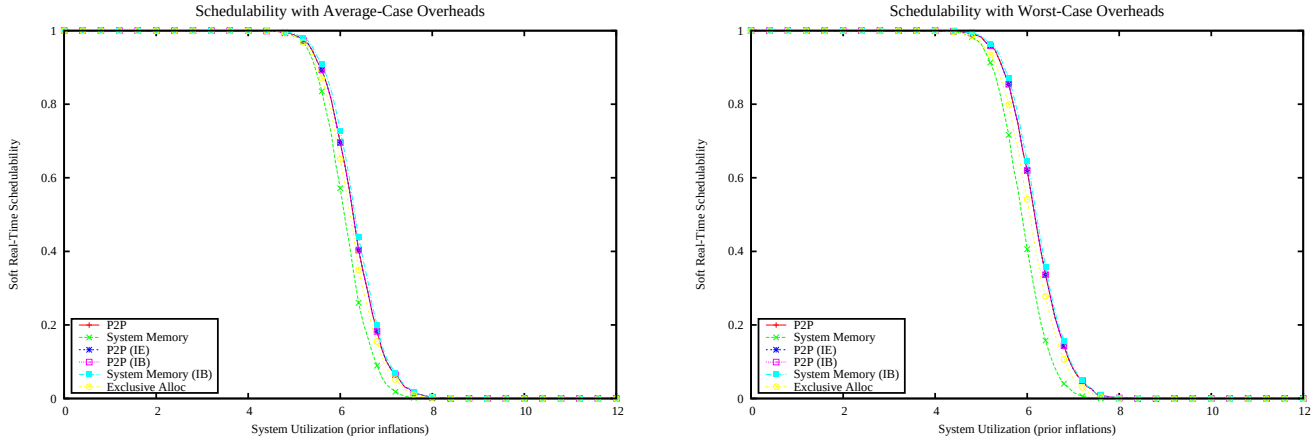

Figure 4300: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

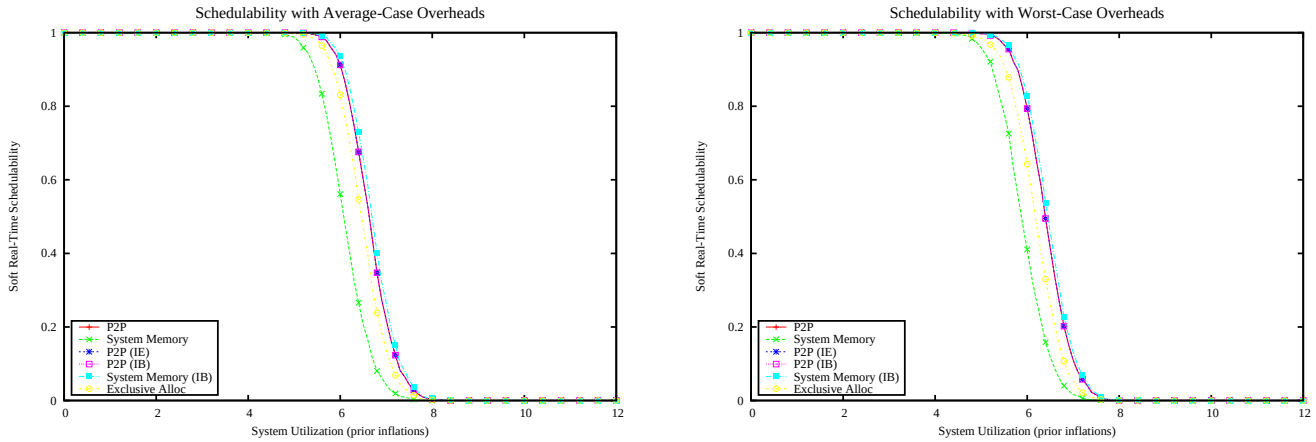

Figure 4301: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

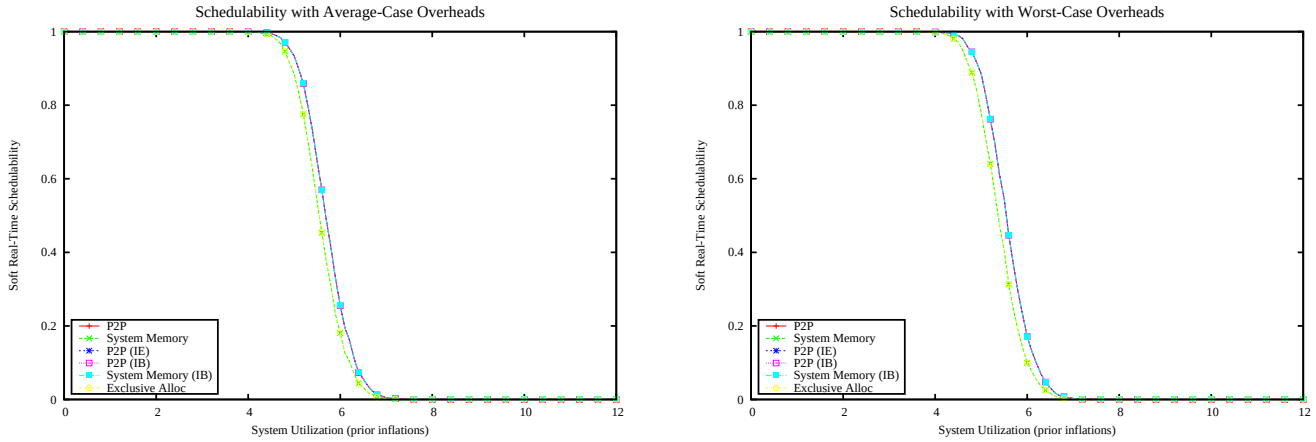

Figure 4302: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

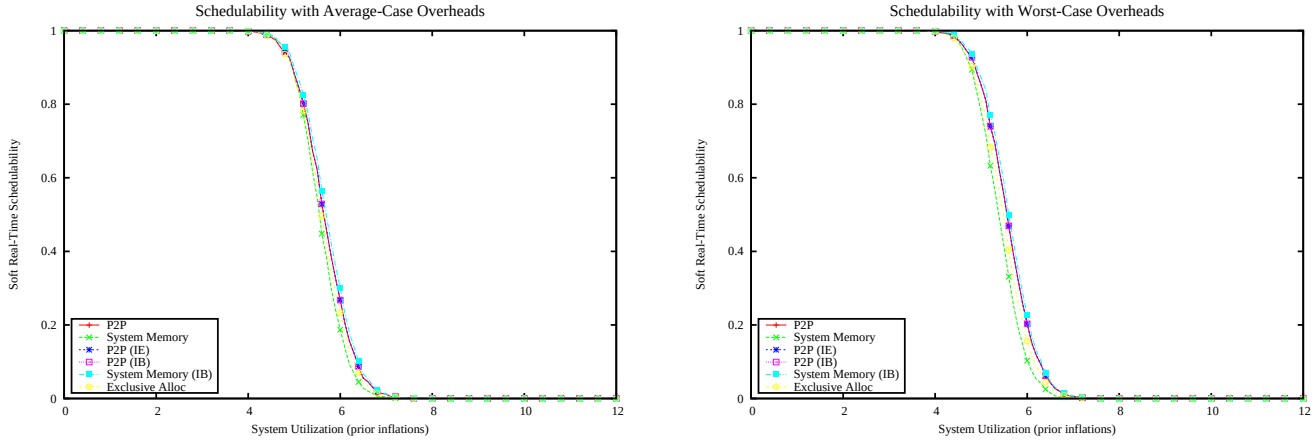

Figure 4303: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

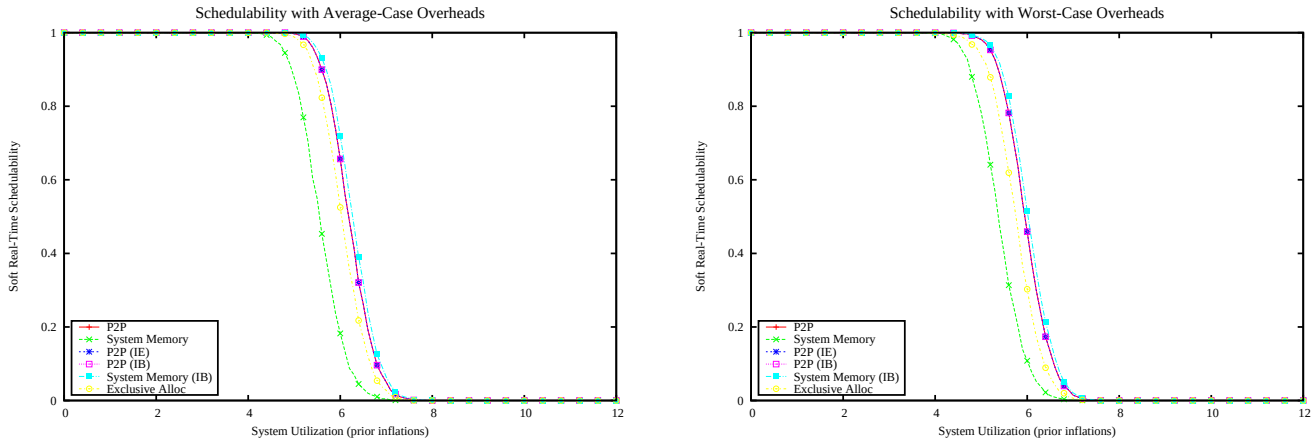

Figure 4304: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

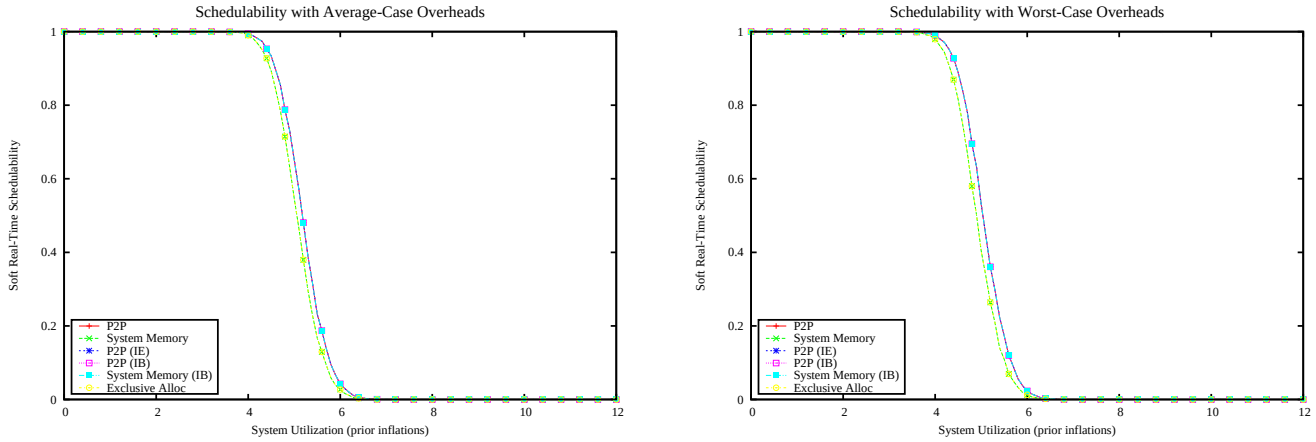

Figure 4305: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

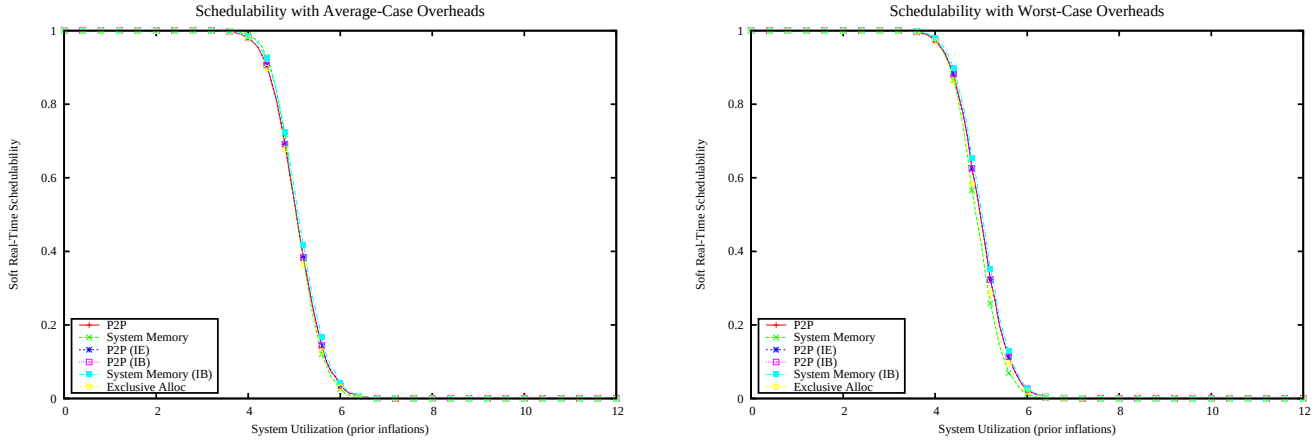

Figure 4306: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

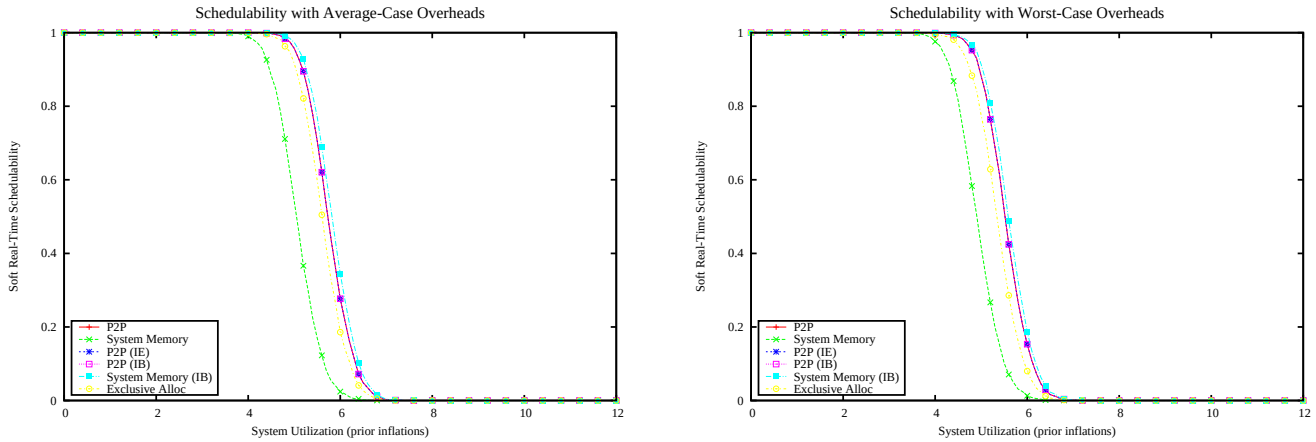

Figure 4307: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

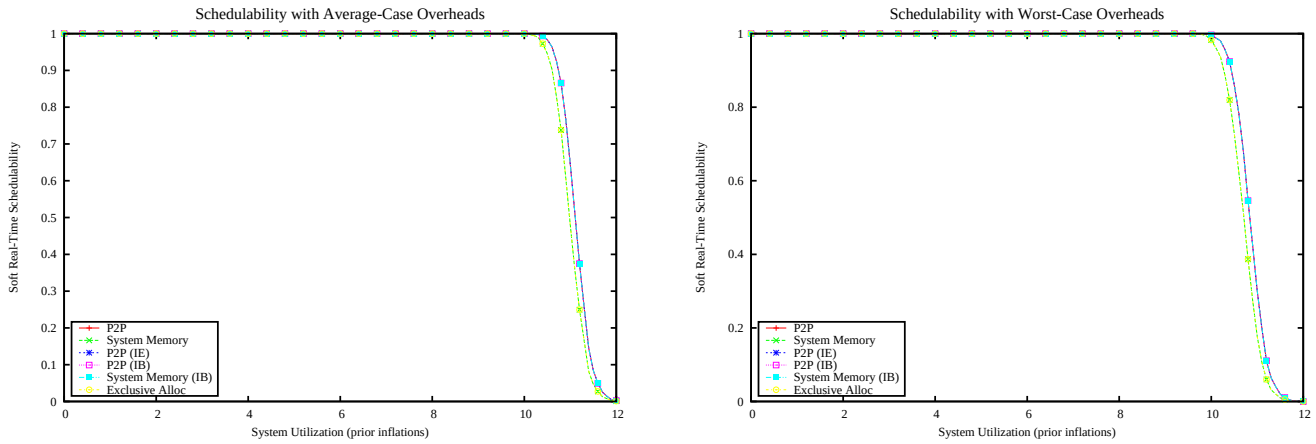

Figure 4308: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

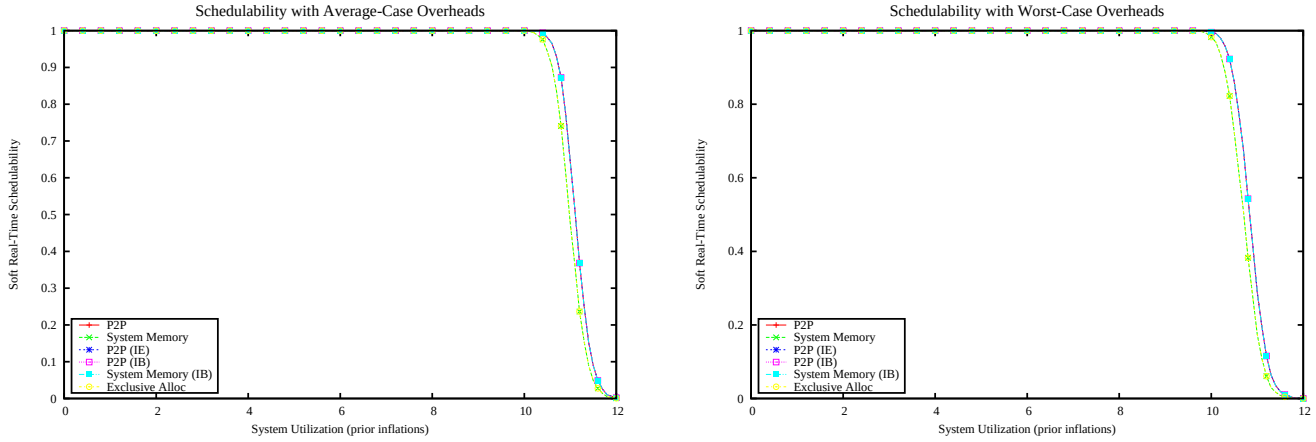

Figure 4309: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

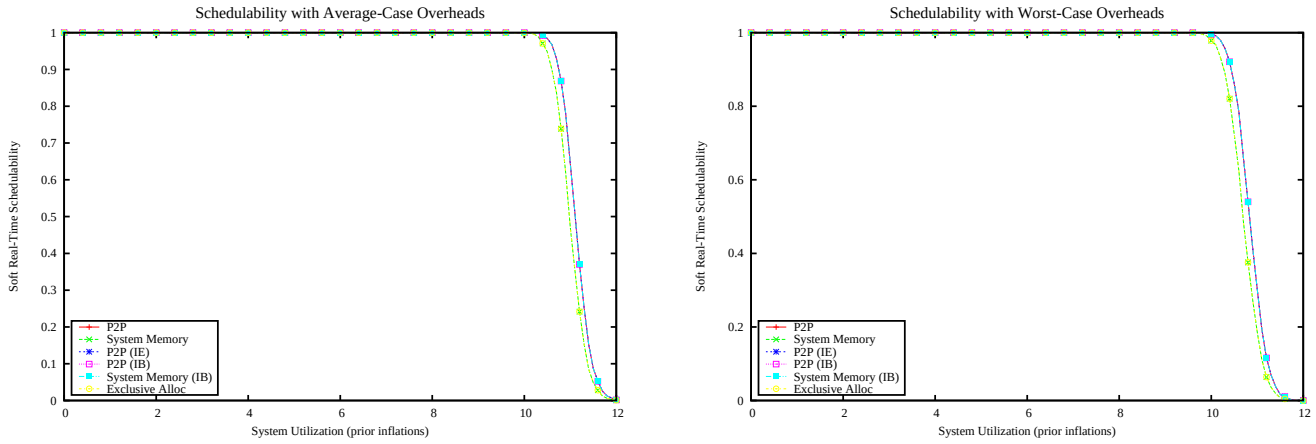

Figure 4310: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

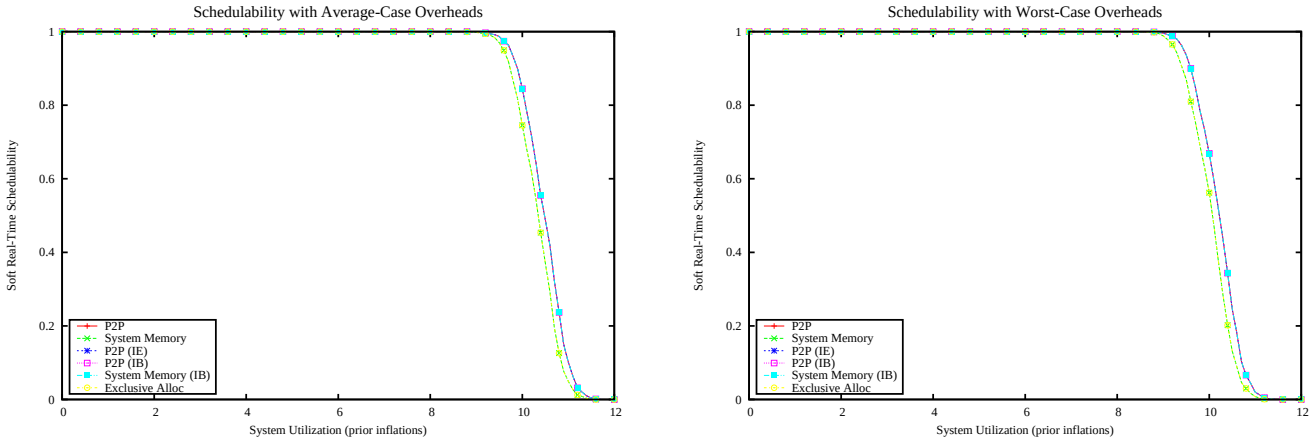

Figure 4311: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

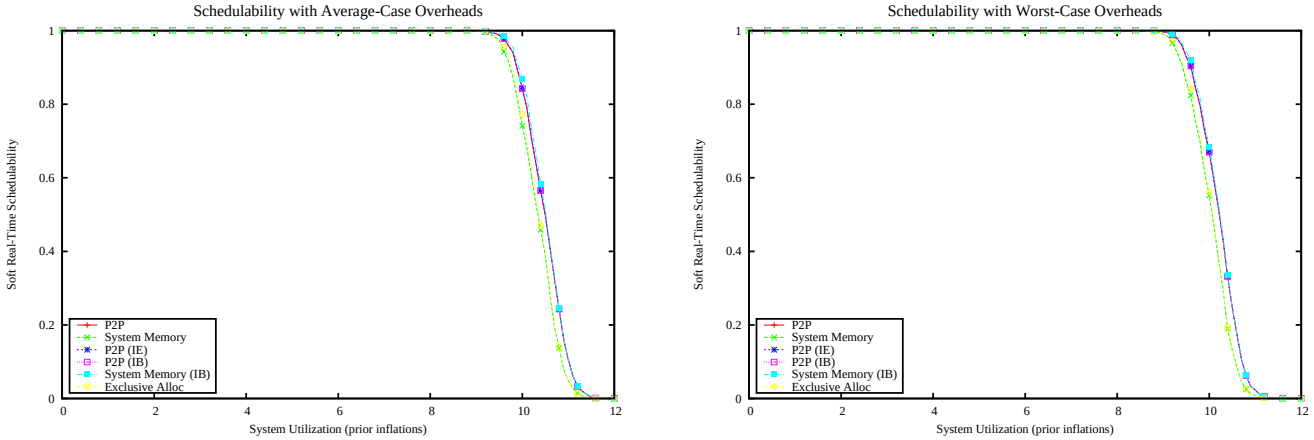

Figure 4312: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

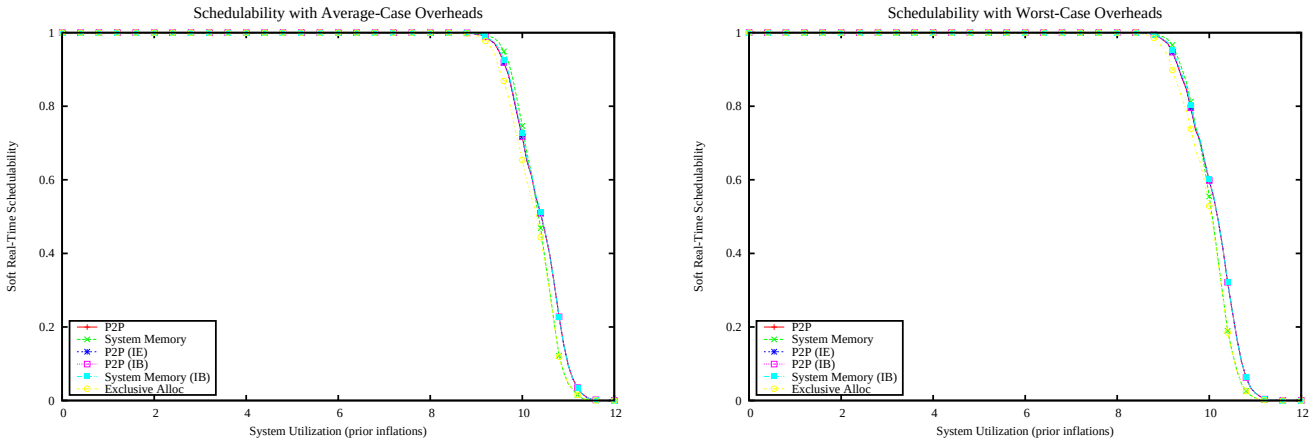

Figure 4313: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

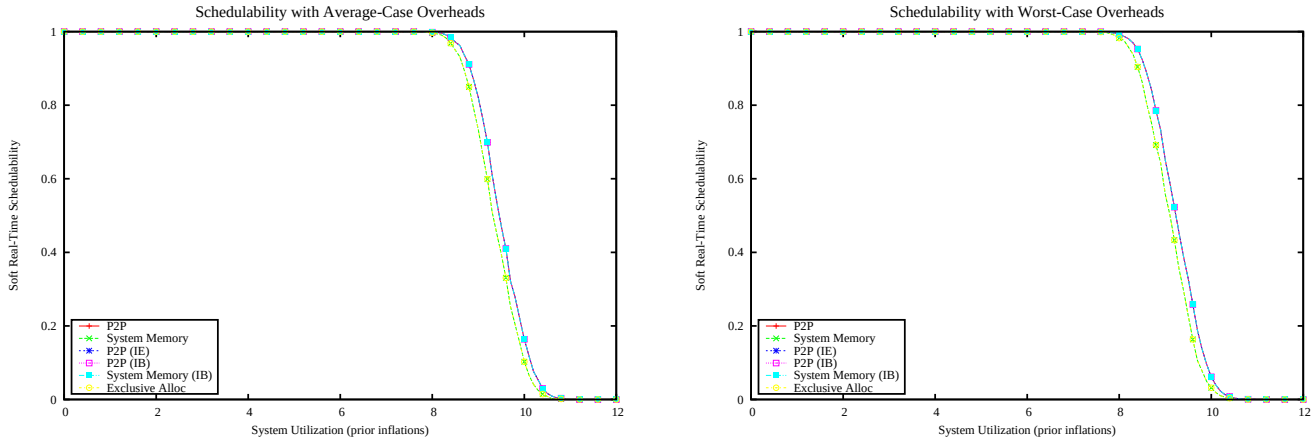

Figure 4314: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

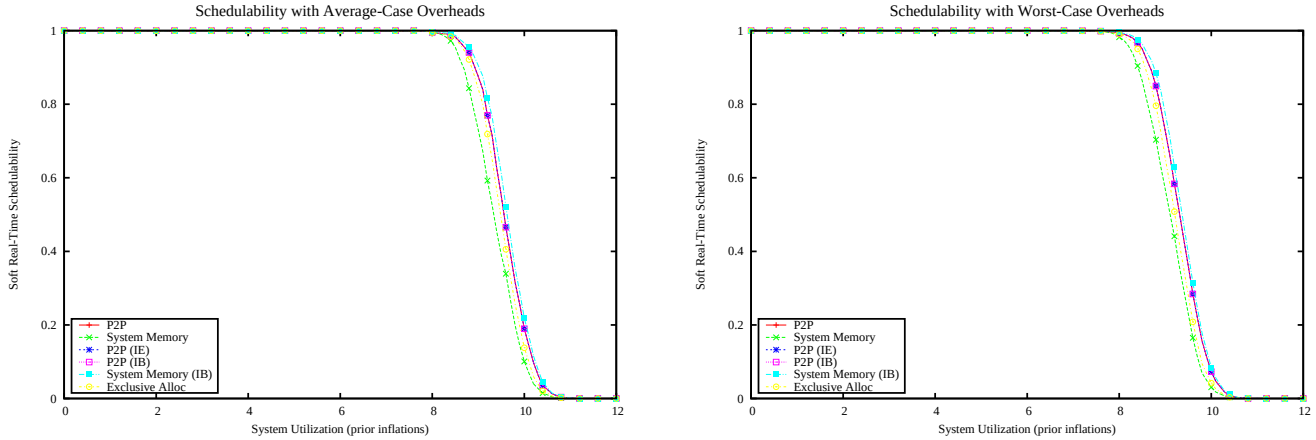

Figure 4315: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

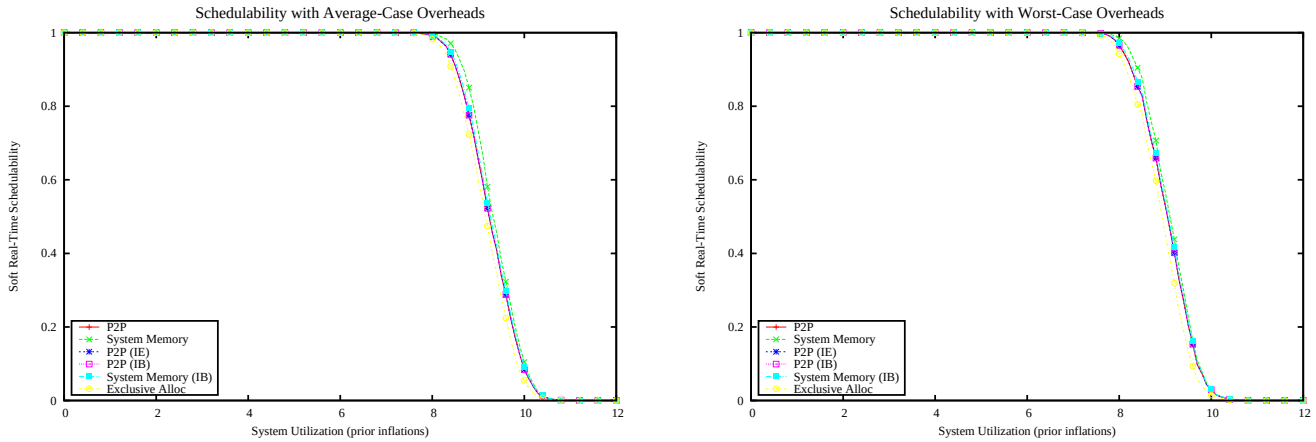

Figure 4316: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

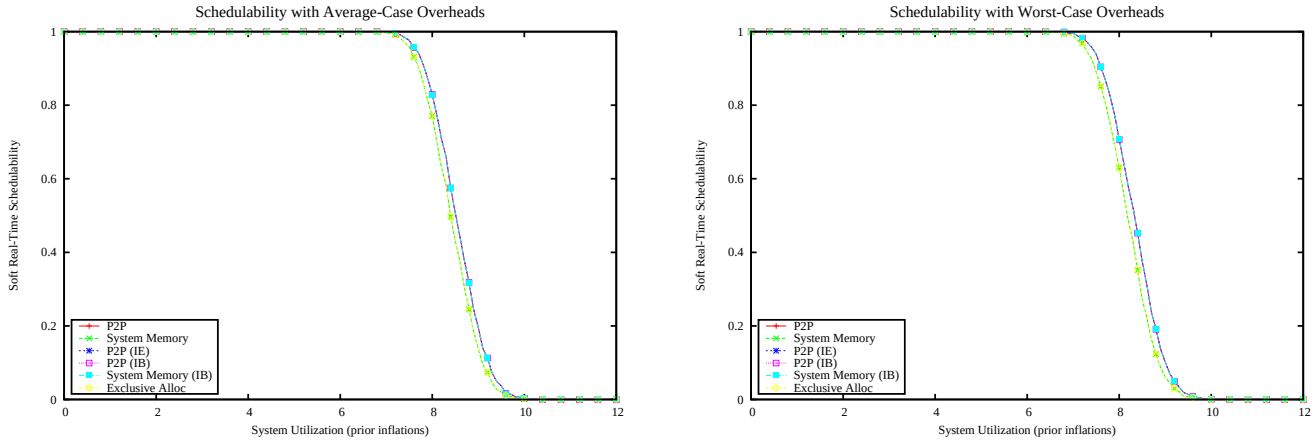

Figure 4317: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

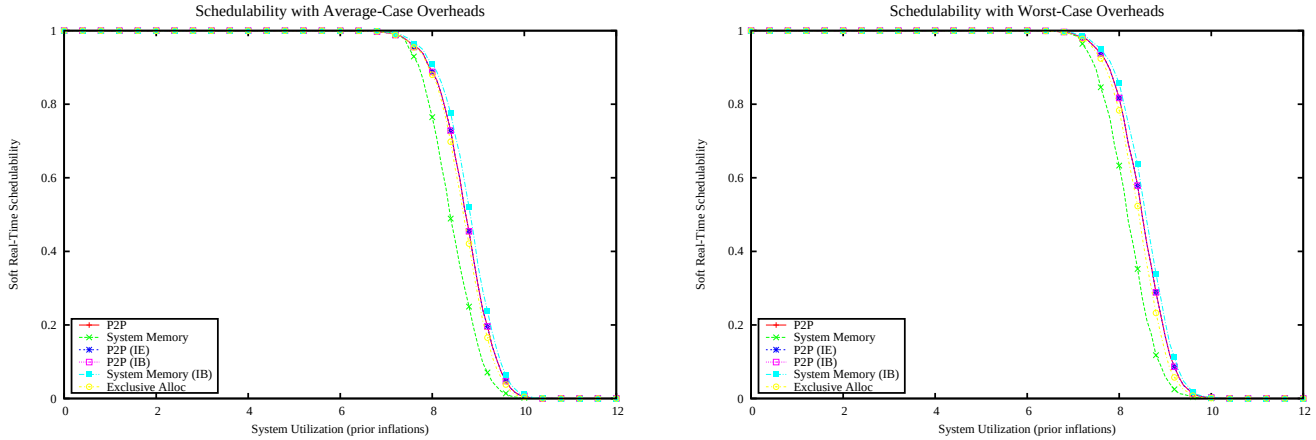

Figure 4318: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

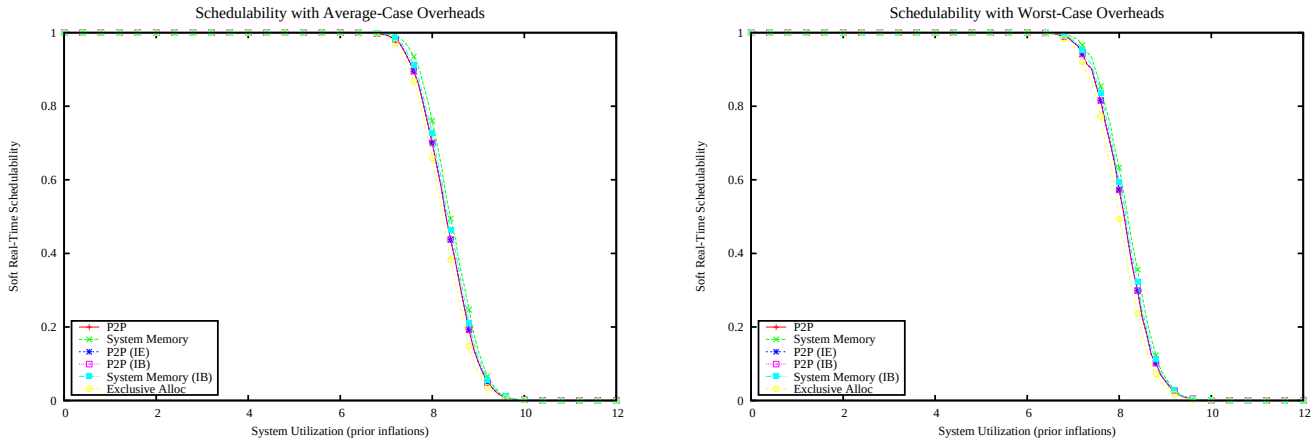

Figure 4319: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

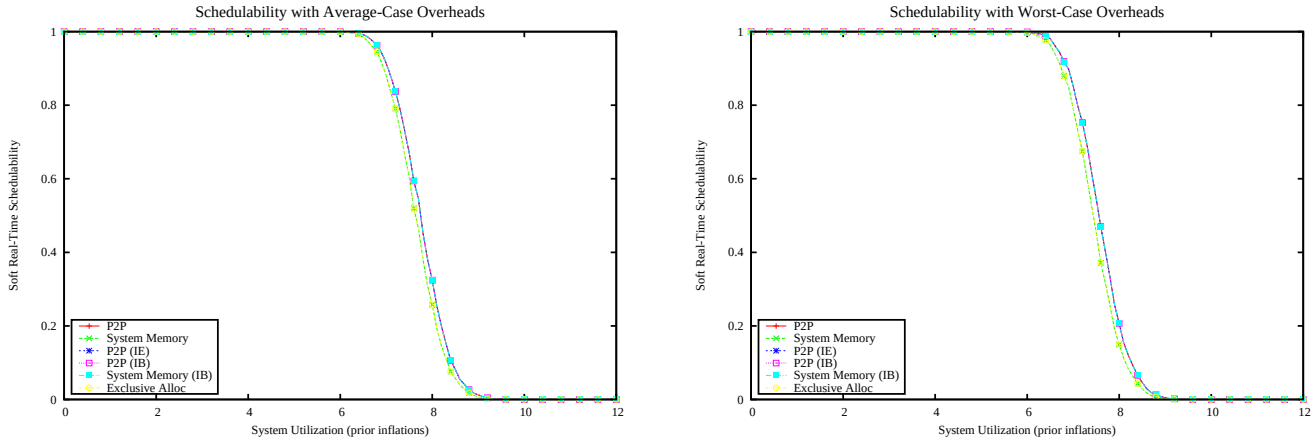

Figure 4320: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

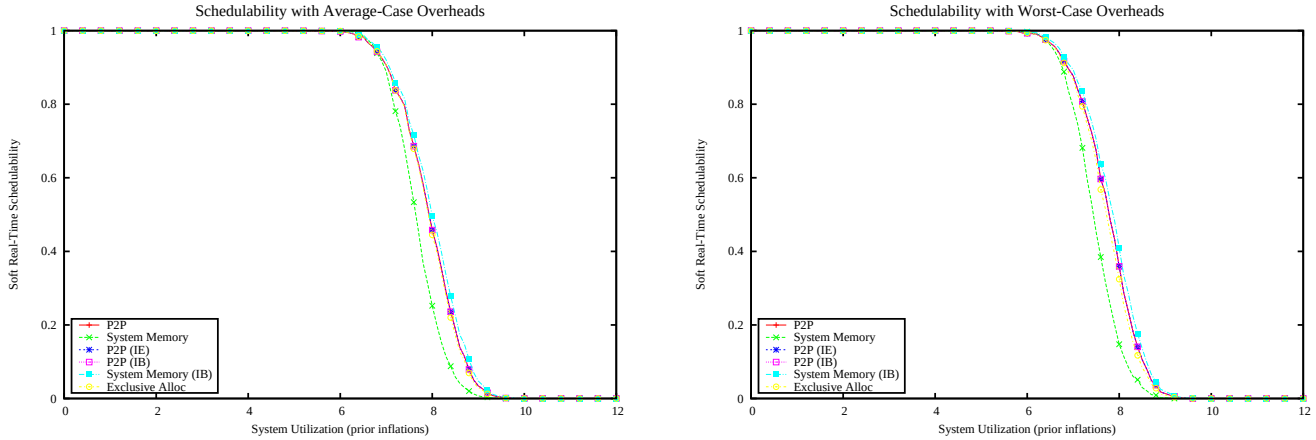

Figure 4321: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

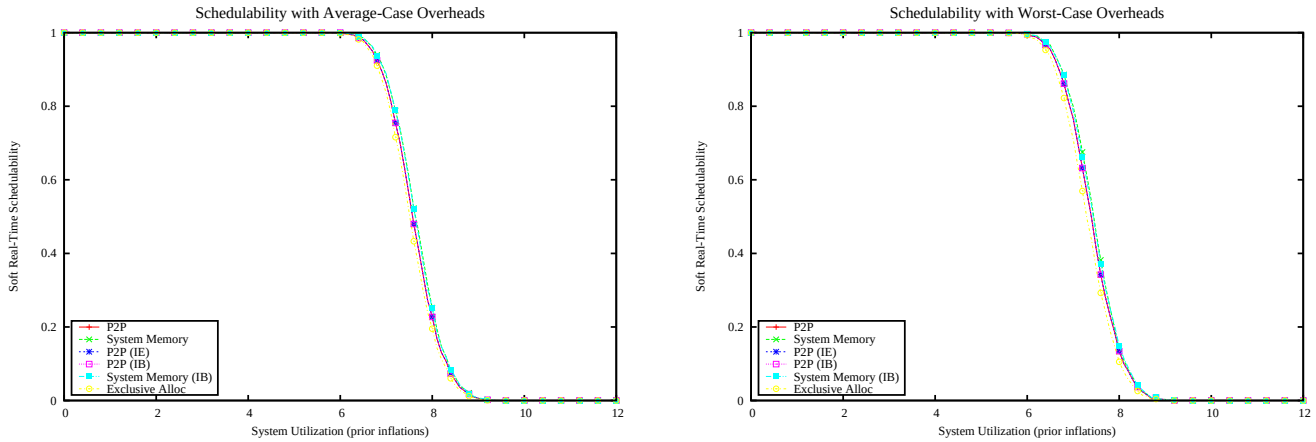

Figure 4322: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

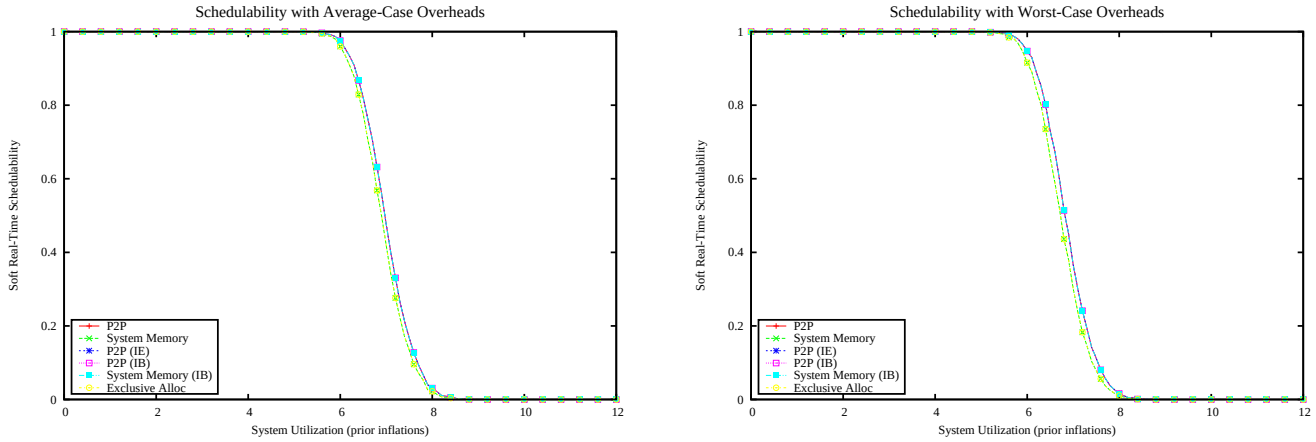

Figure 4323: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

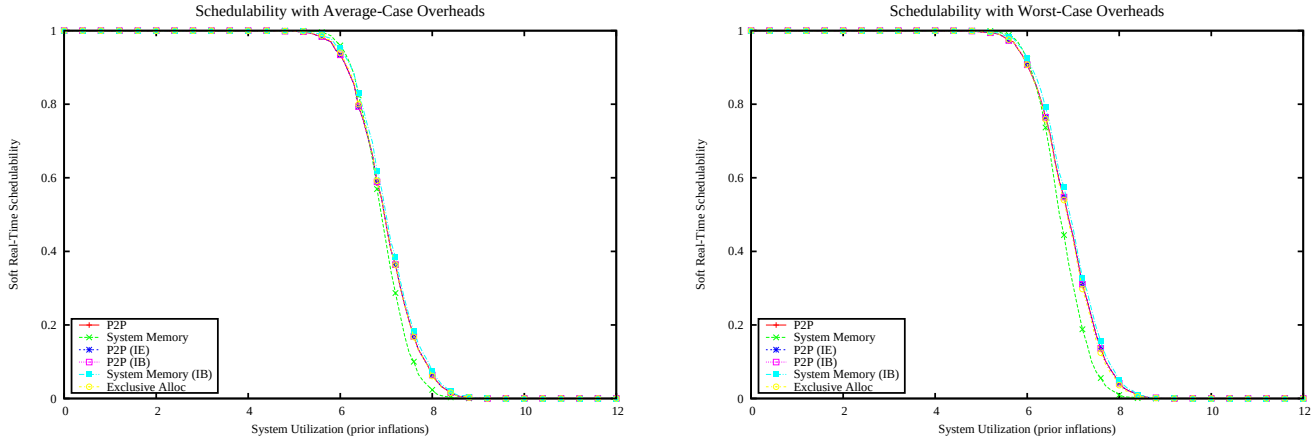

Figure 4324: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

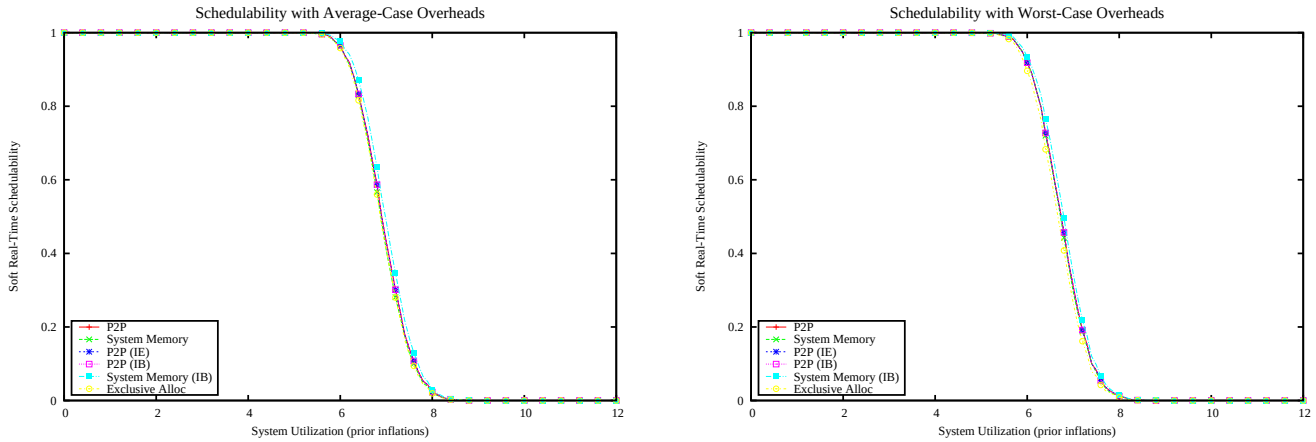

Figure 4325: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

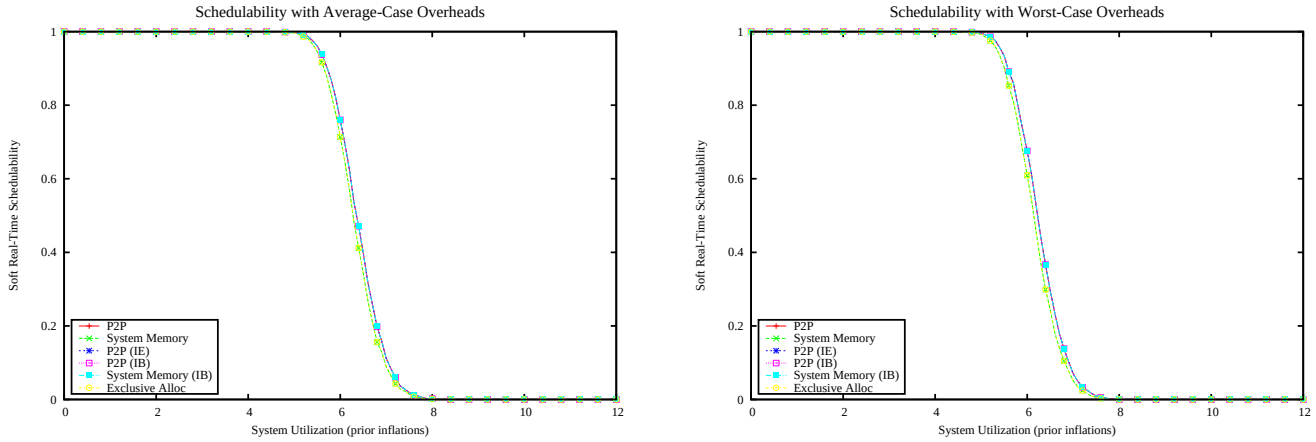

Figure 4326: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

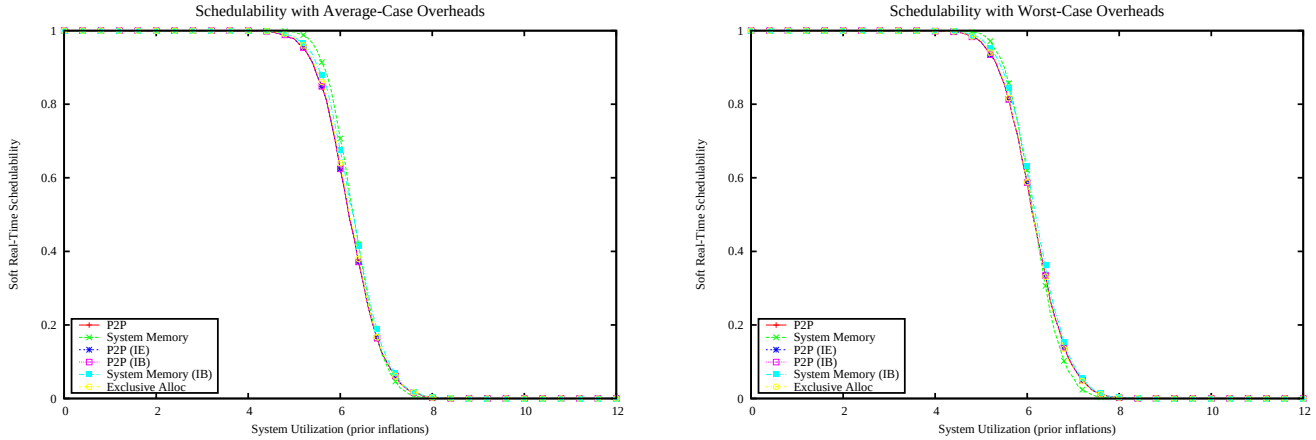

Figure 4327: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

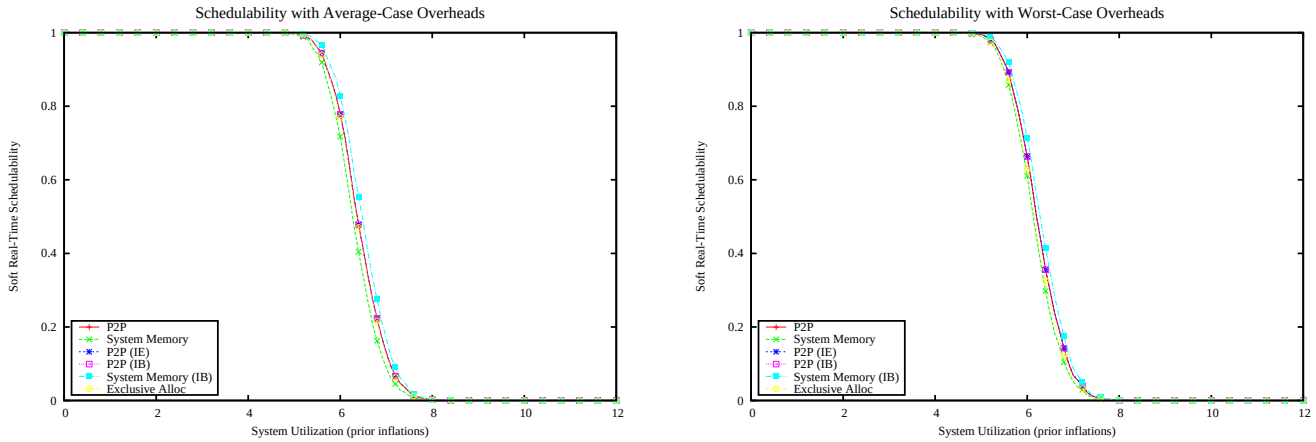

Figure 4328: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

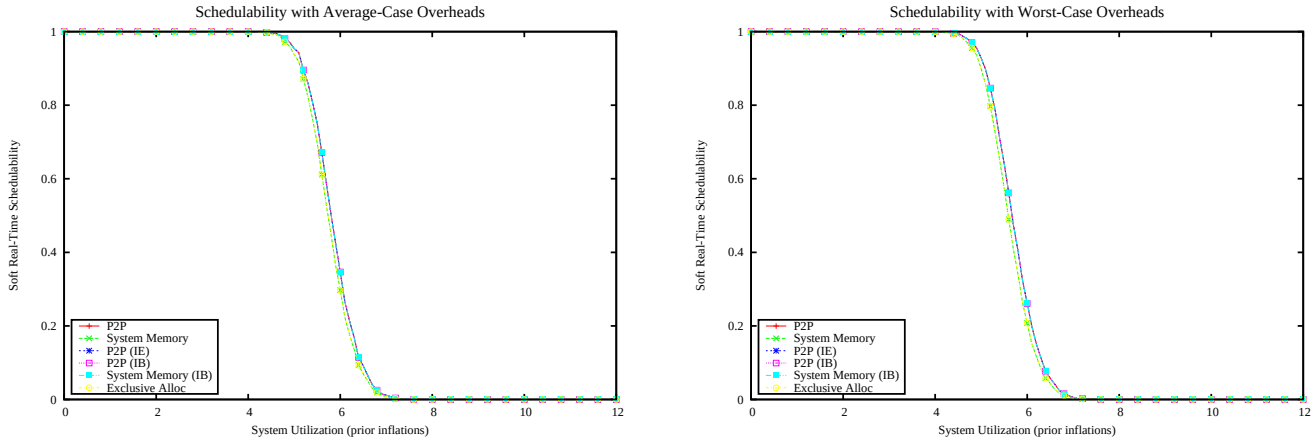

Figure 4329: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

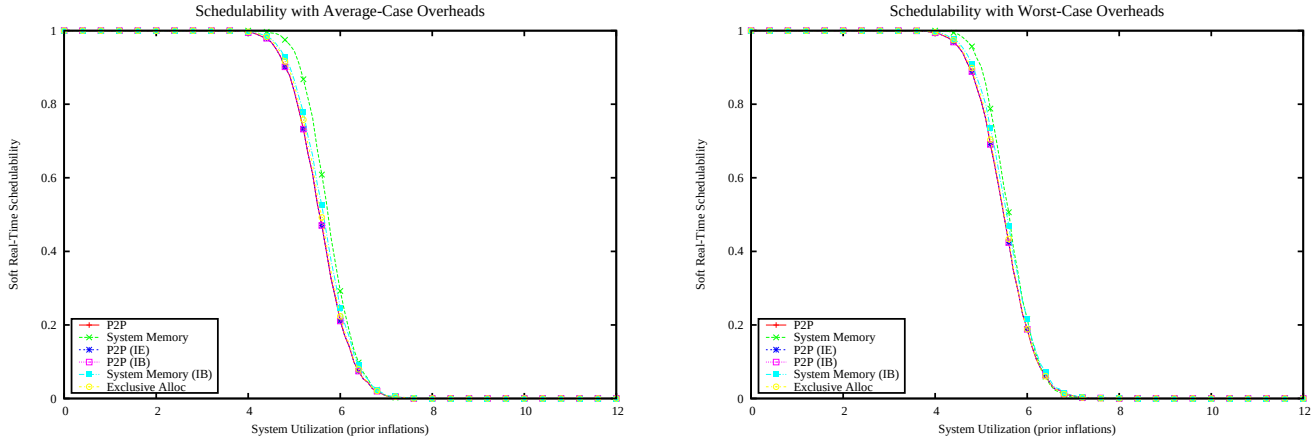

Figure 4330: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

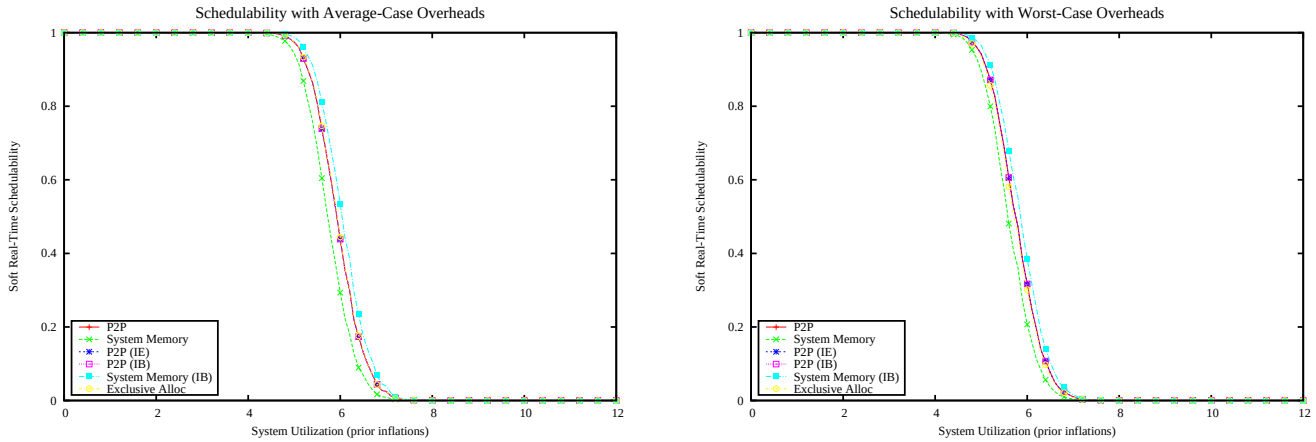

Figure 4331: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

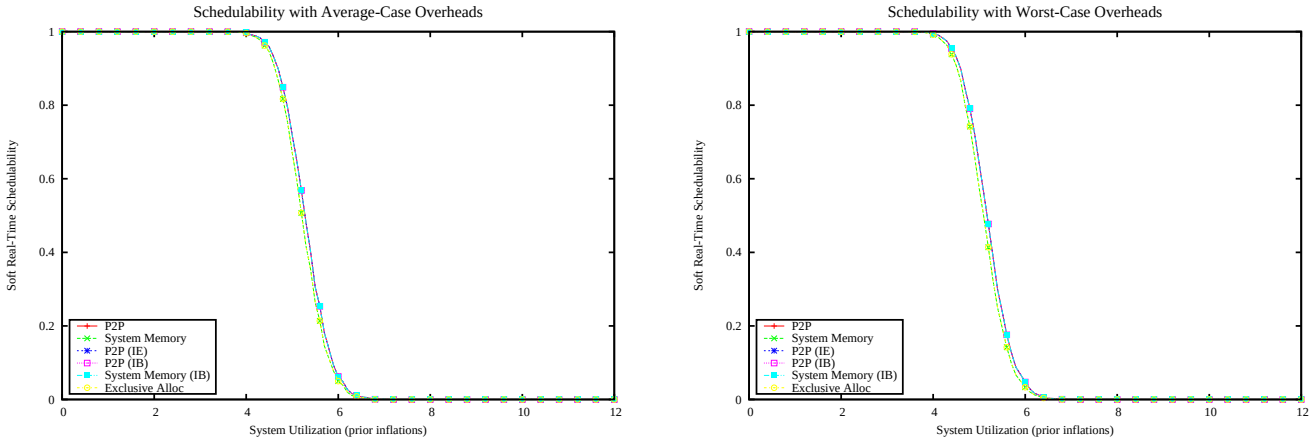

Figure 4332: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

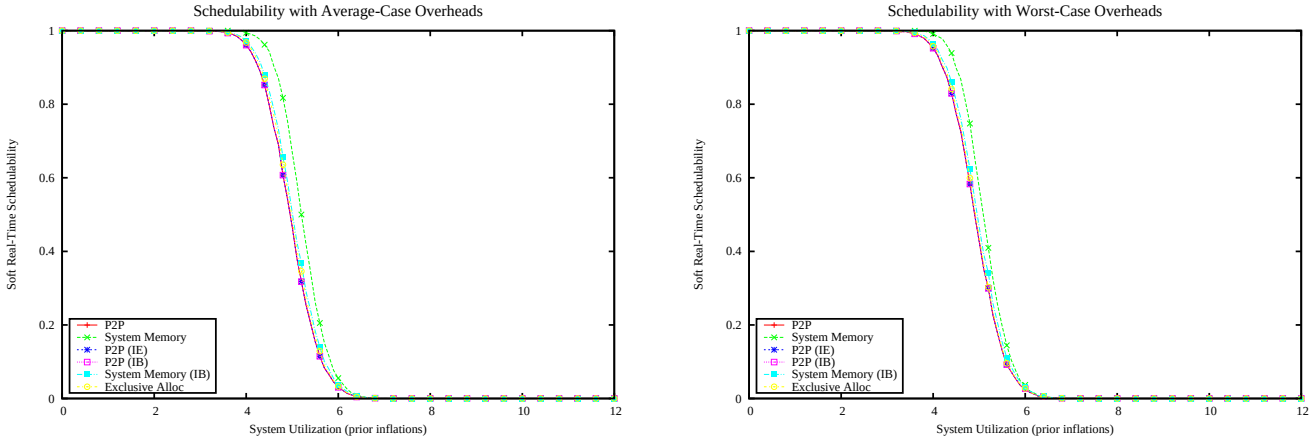

Figure 4333: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

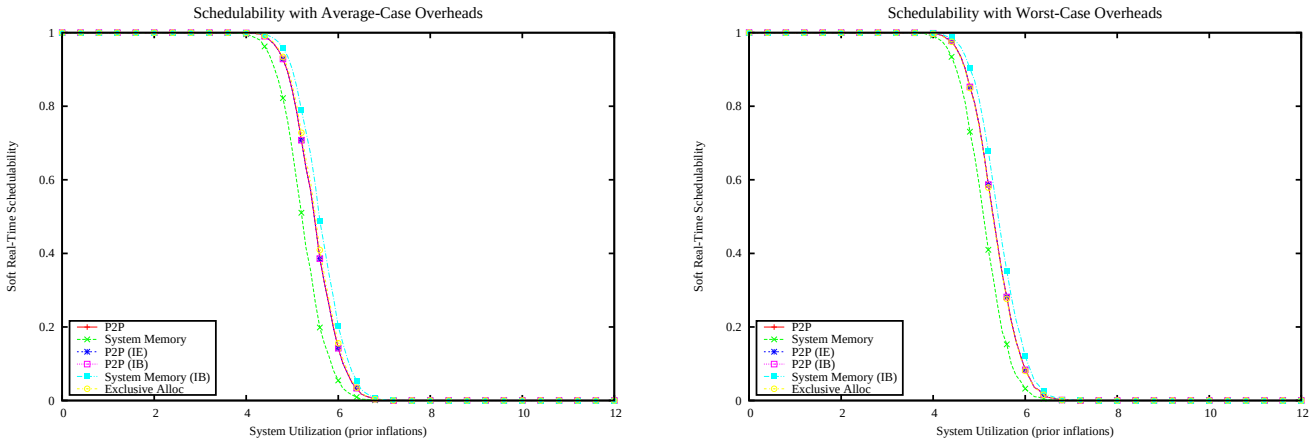

Figure 4334: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

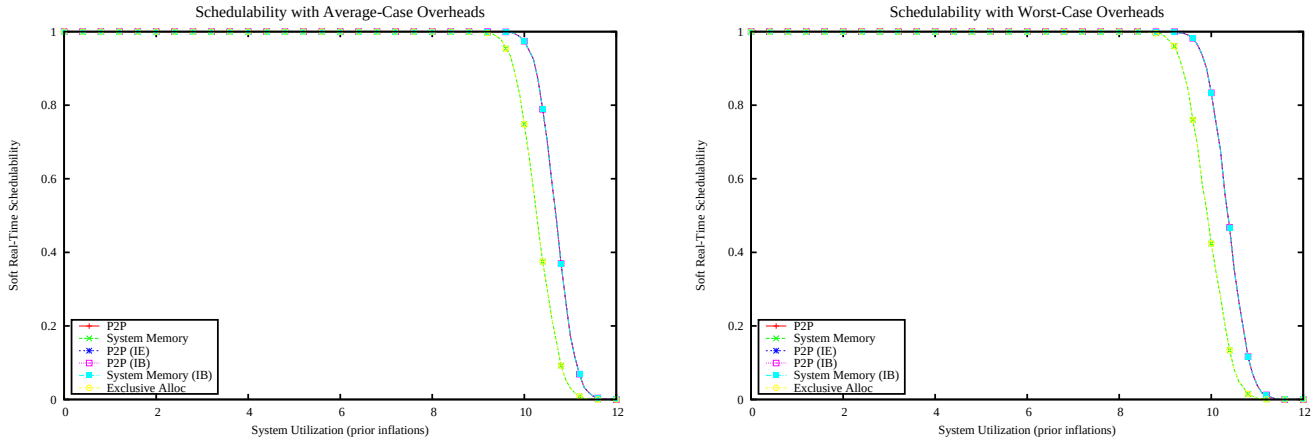

Figure 4335: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

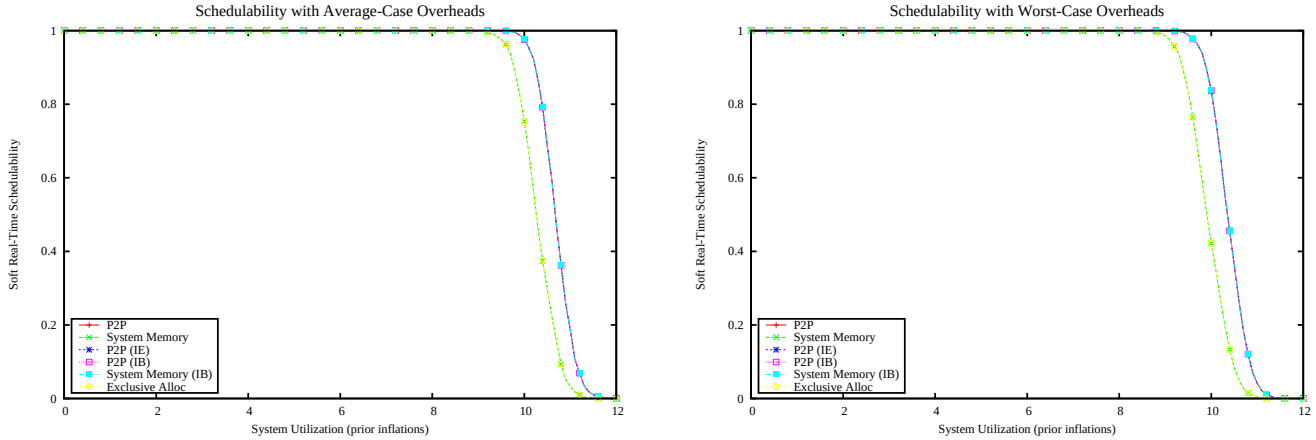

Figure 4336: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

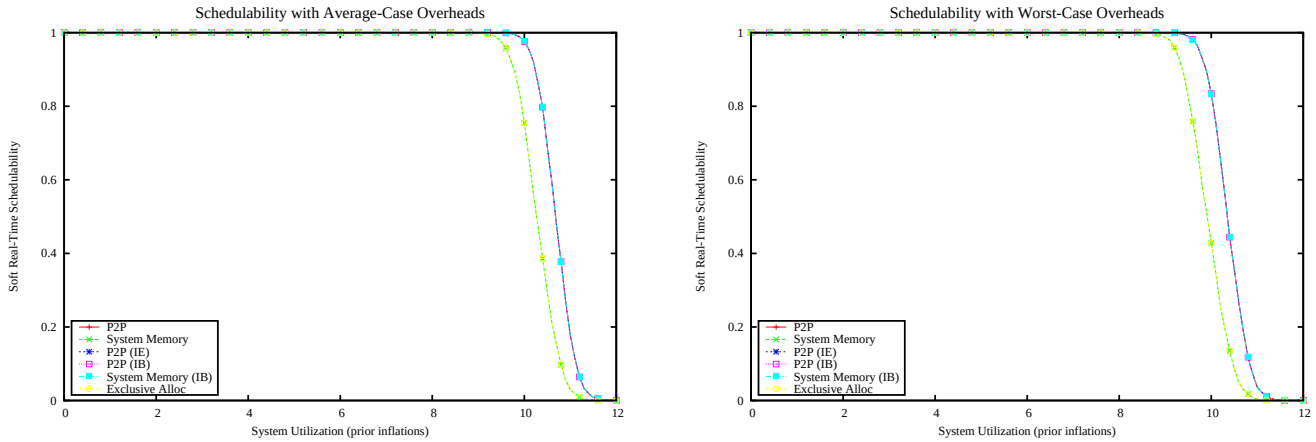

Figure 4337: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

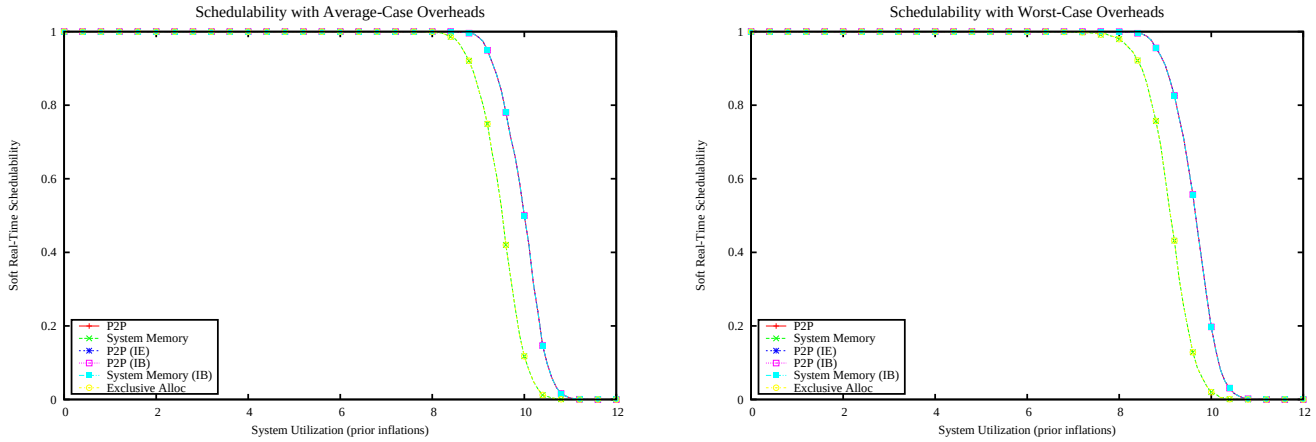

Figure 4338: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

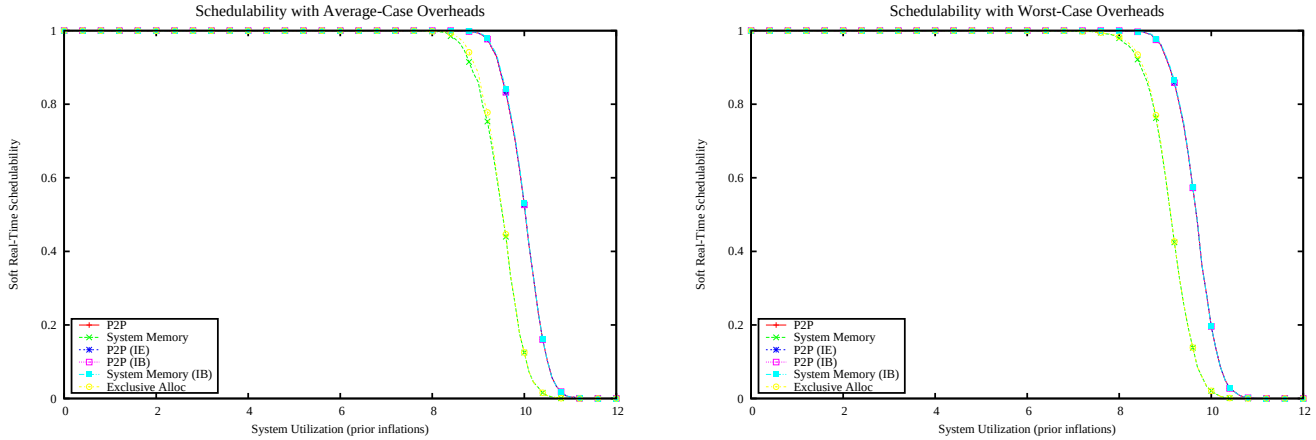

Figure 4339: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

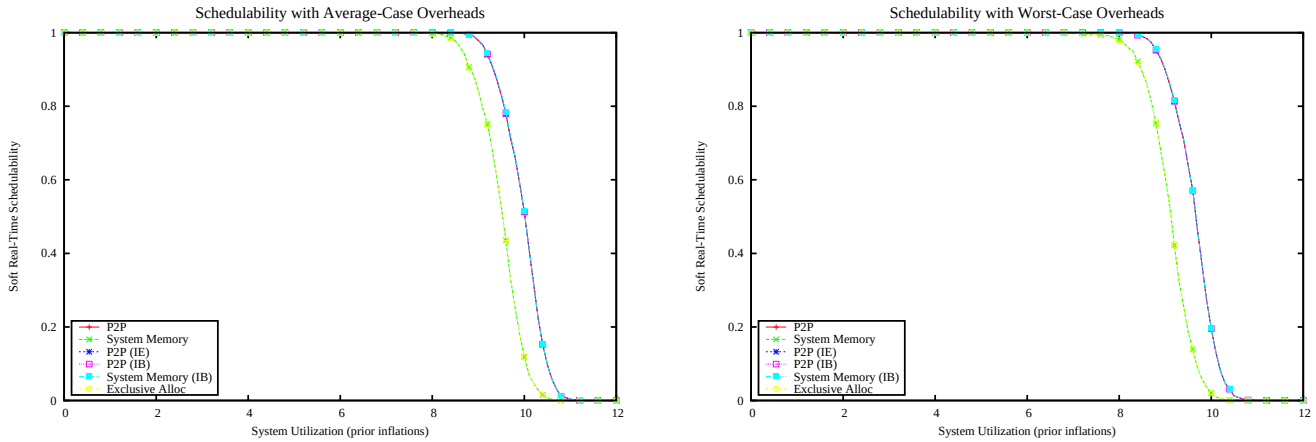

Figure 4340: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

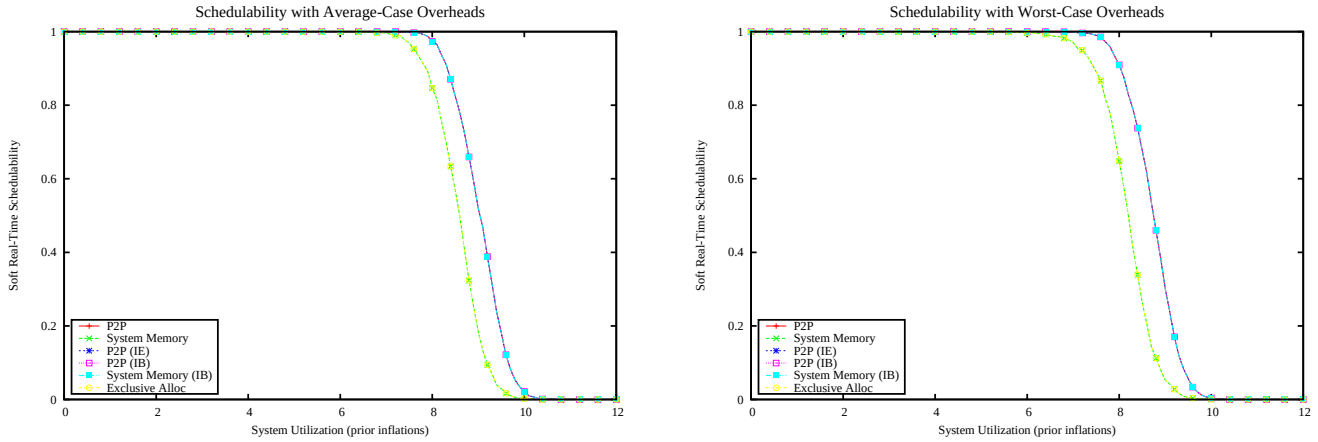

Figure 4341: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

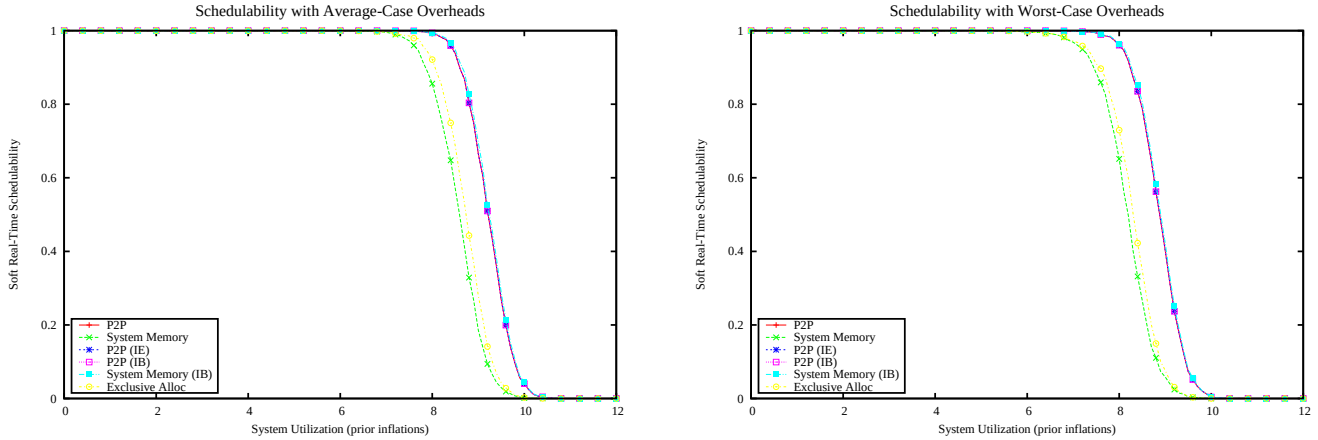

Figure 4342: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

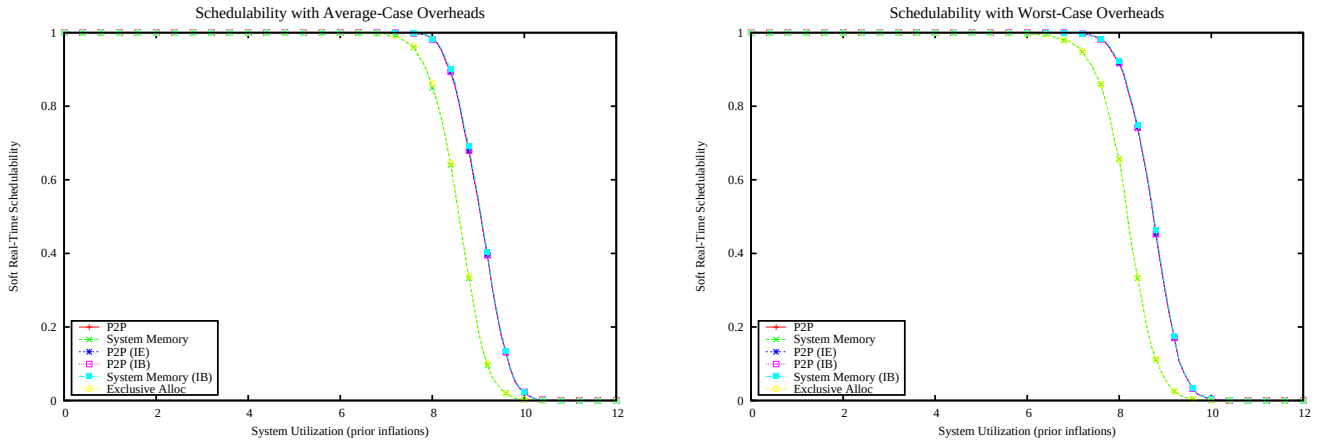

Figure 4343: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

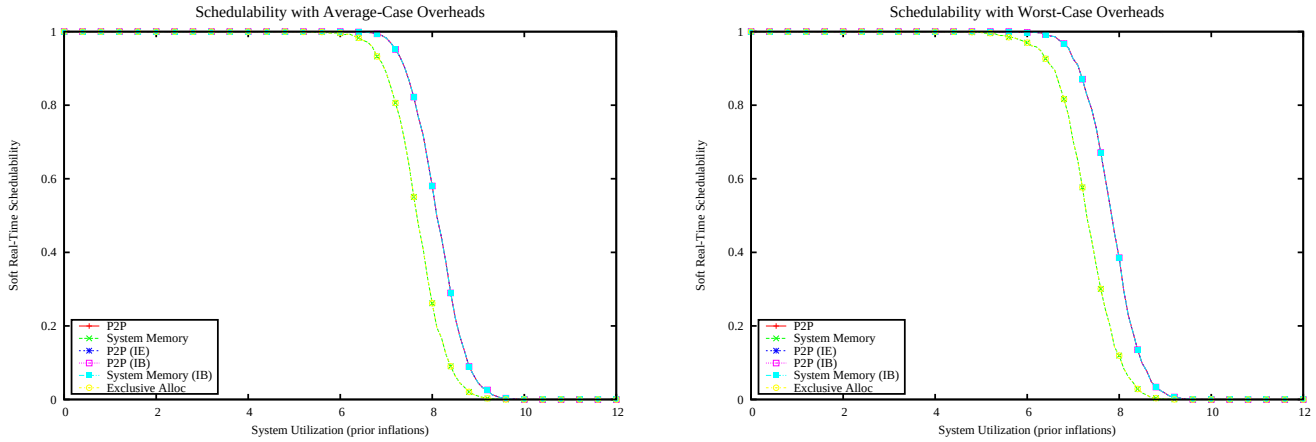

Figure 4344: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

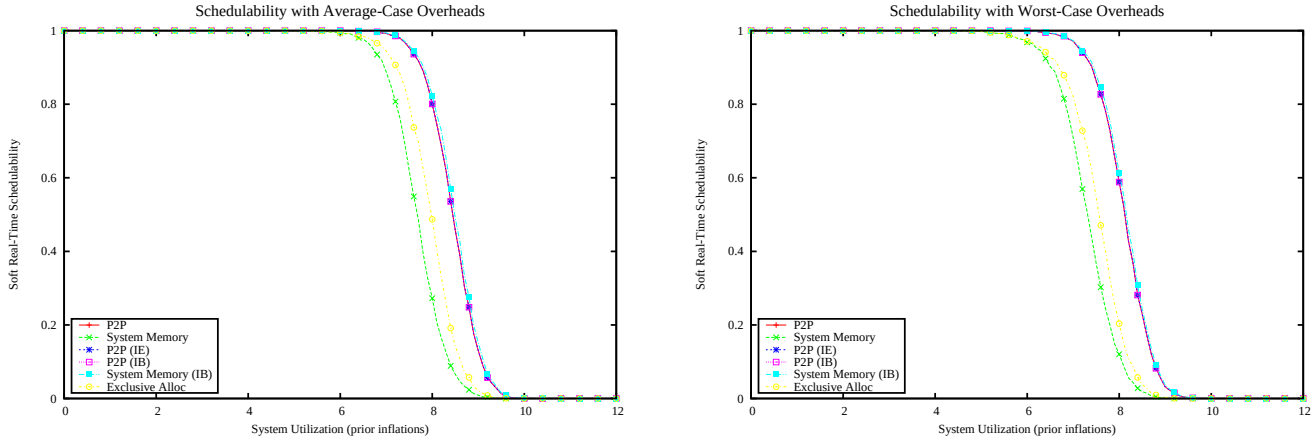

Figure 4345: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

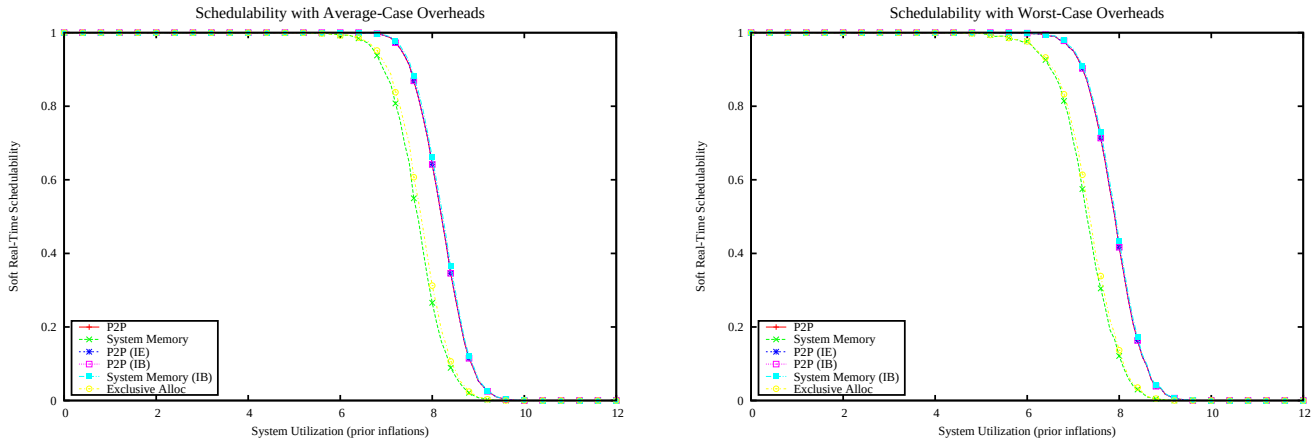

Figure 4346: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

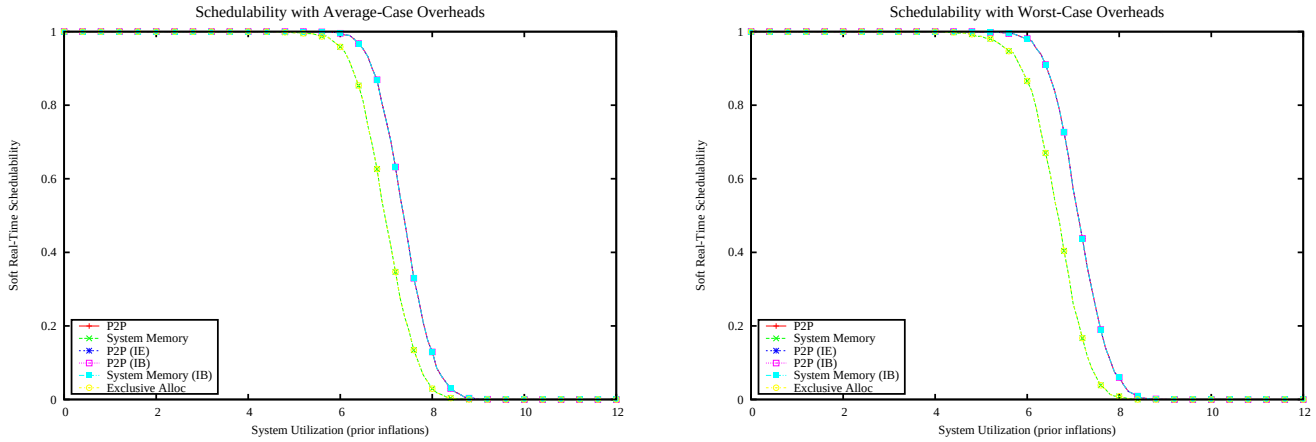

Figure 4347: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

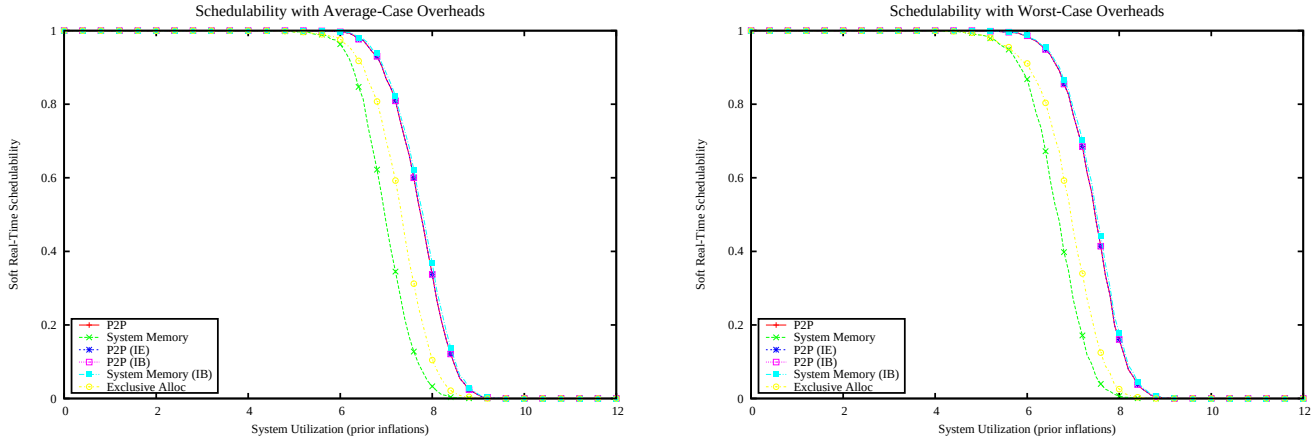

Figure 4348: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

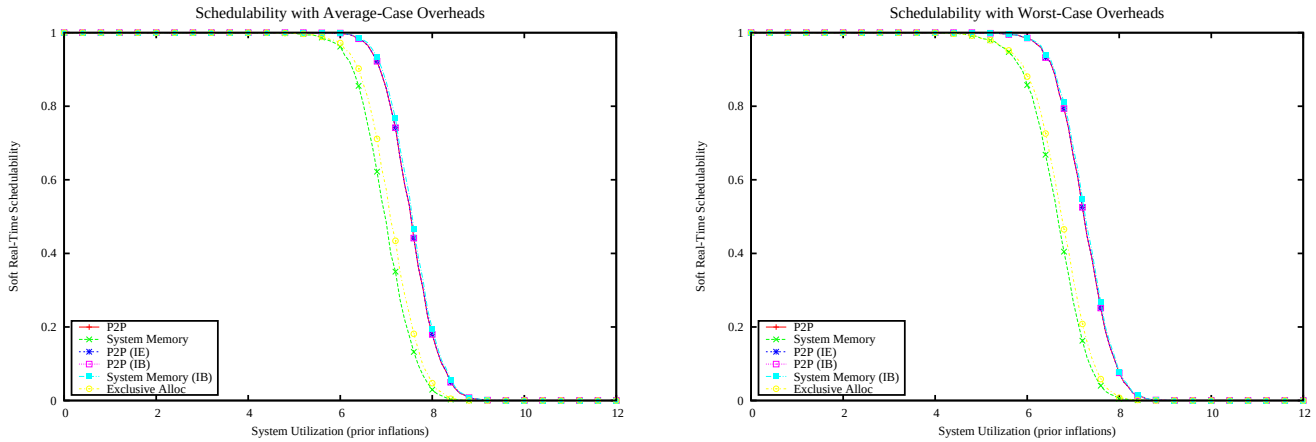

Figure 4349: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

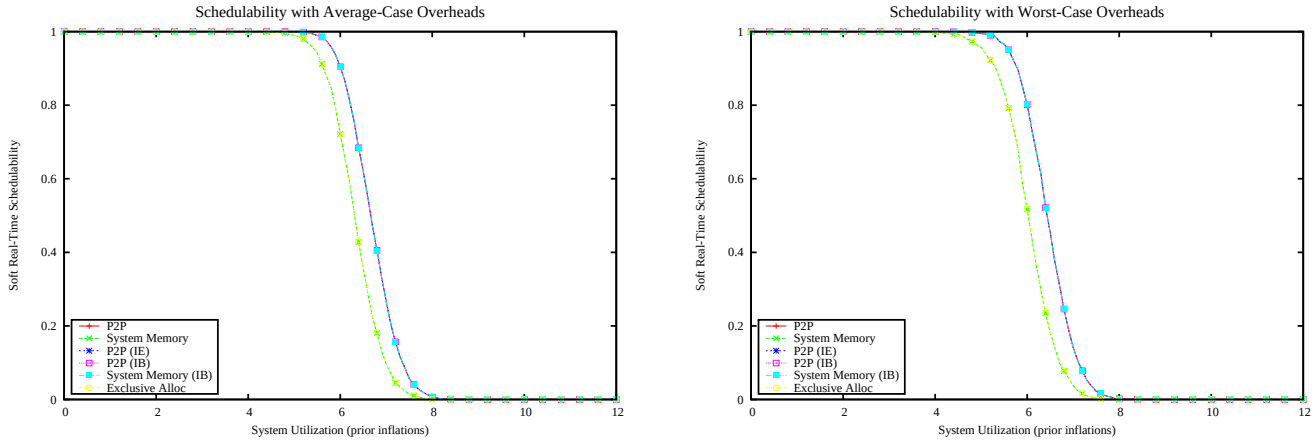

Figure 4350: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

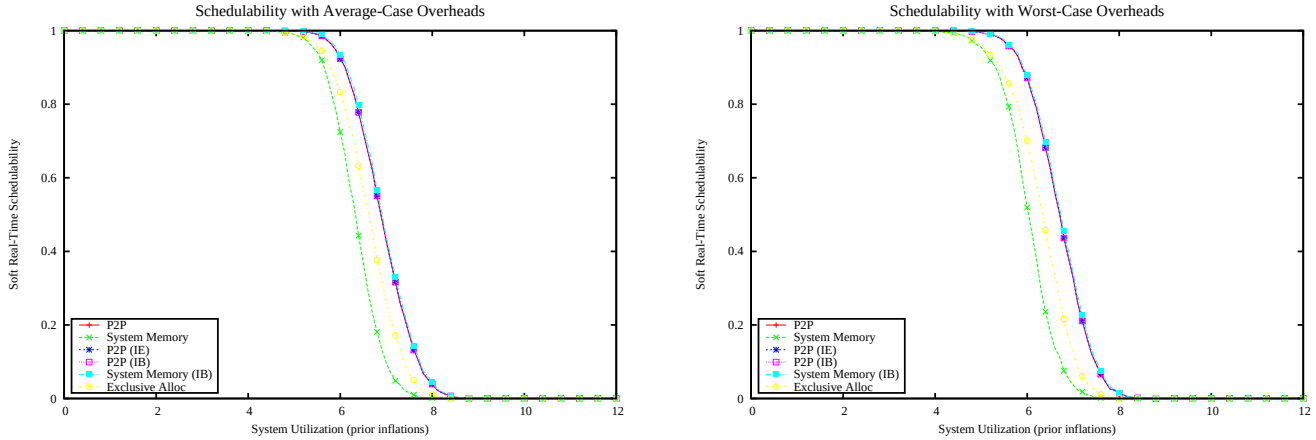

Figure 4351: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

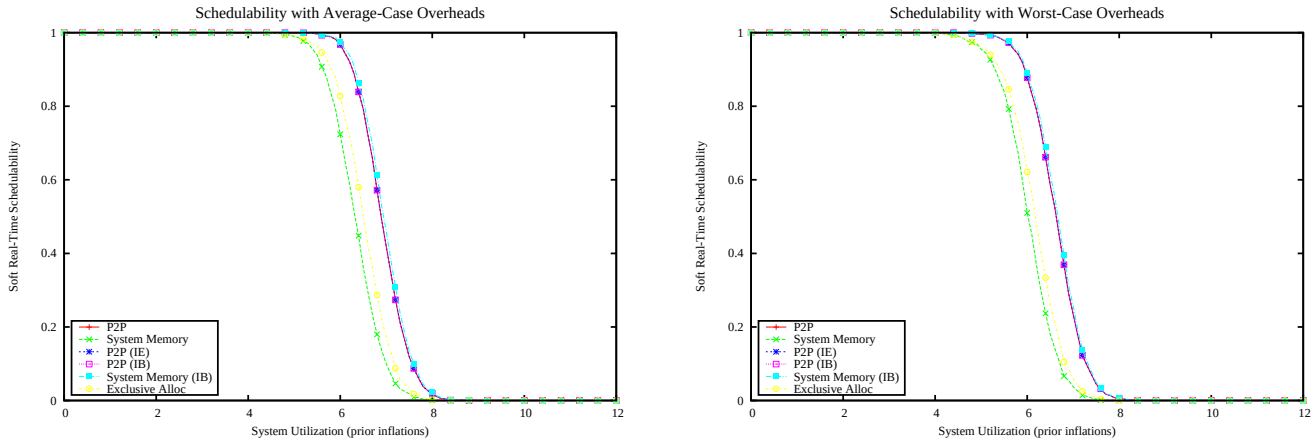

Figure 4352: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

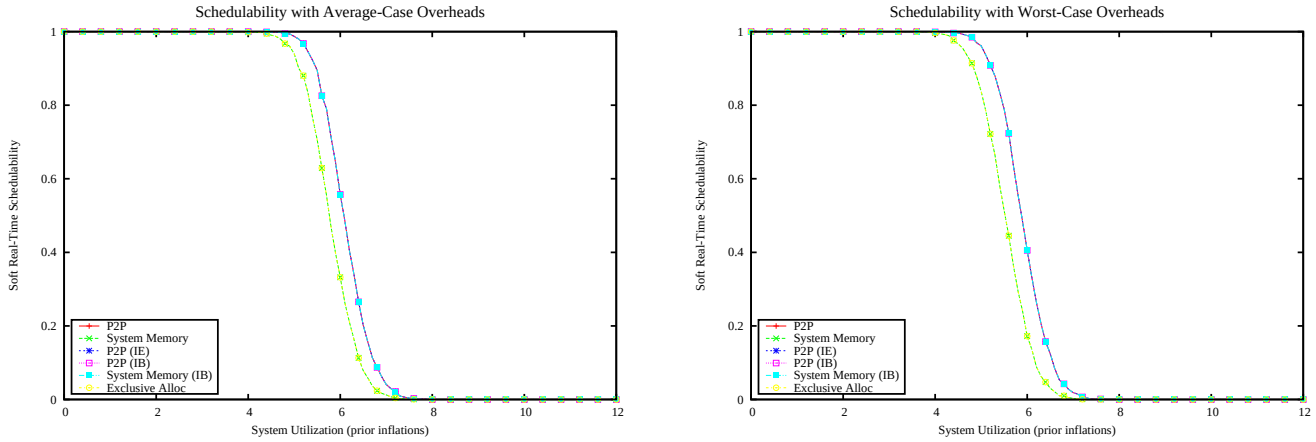

Figure 4353: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

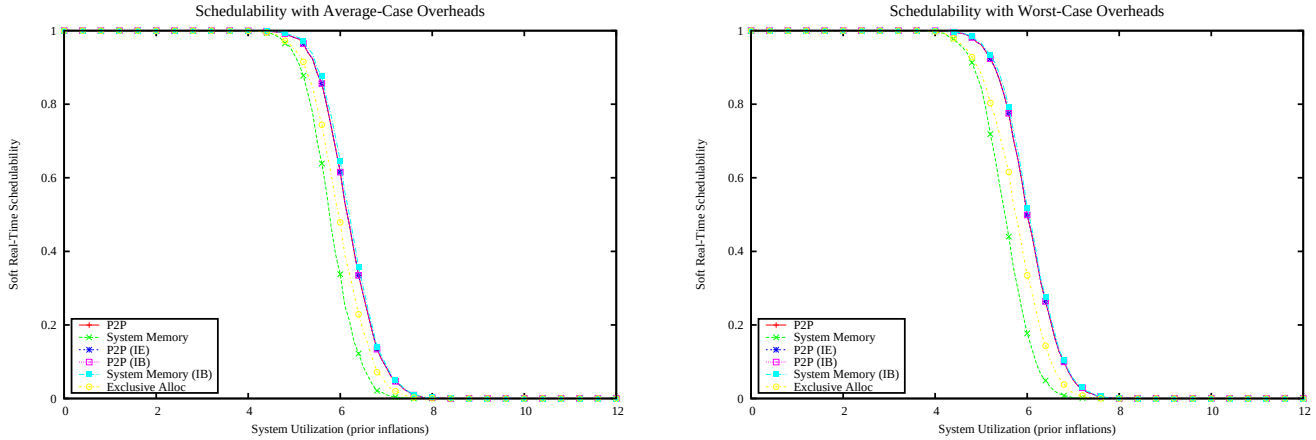

Figure 4354: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

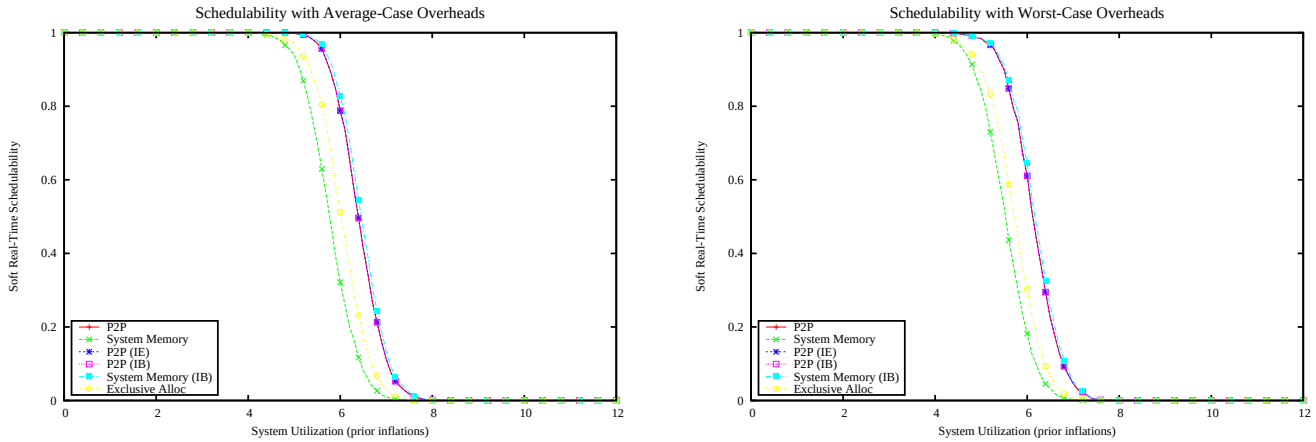

Figure 4355: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

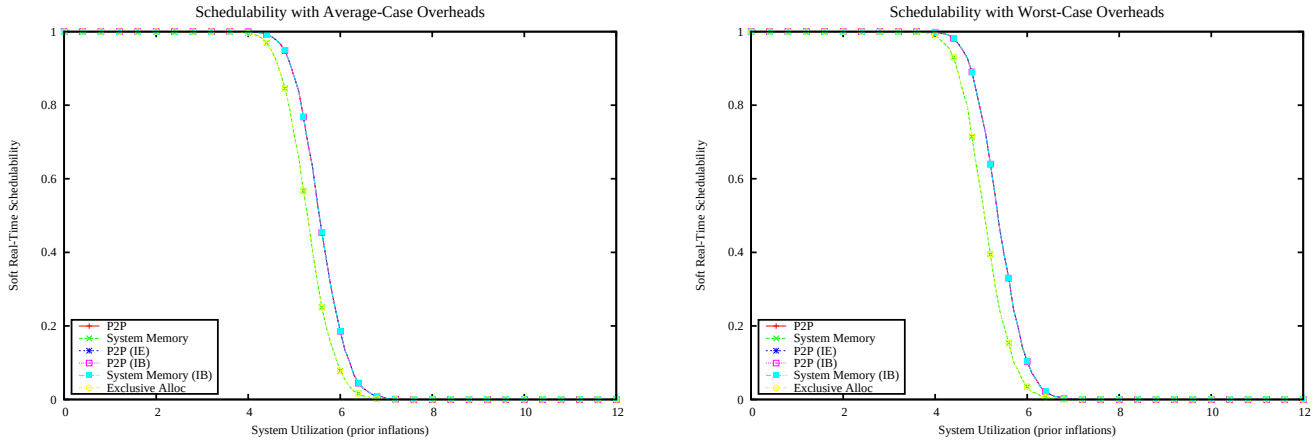

Figure 4356: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

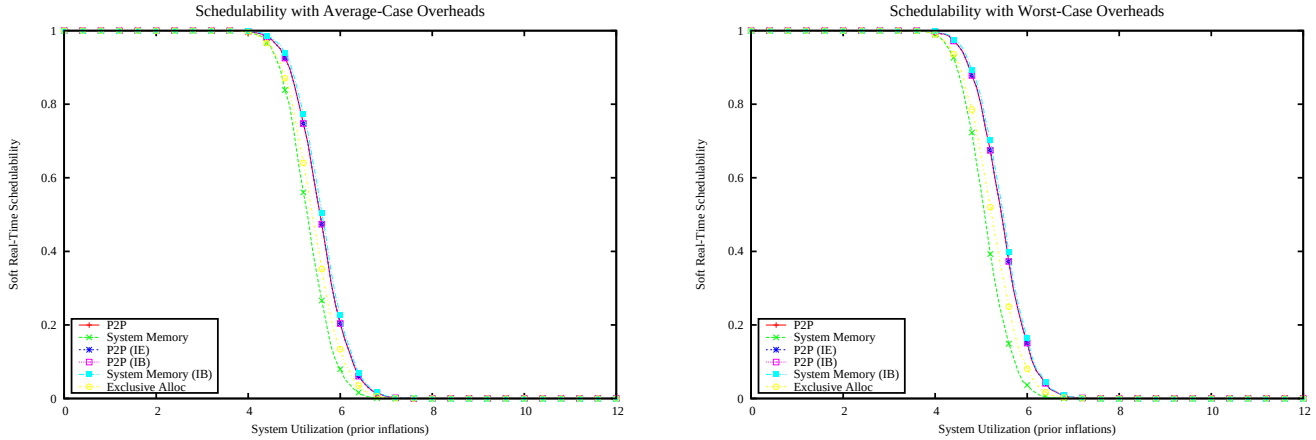

Figure 4357: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

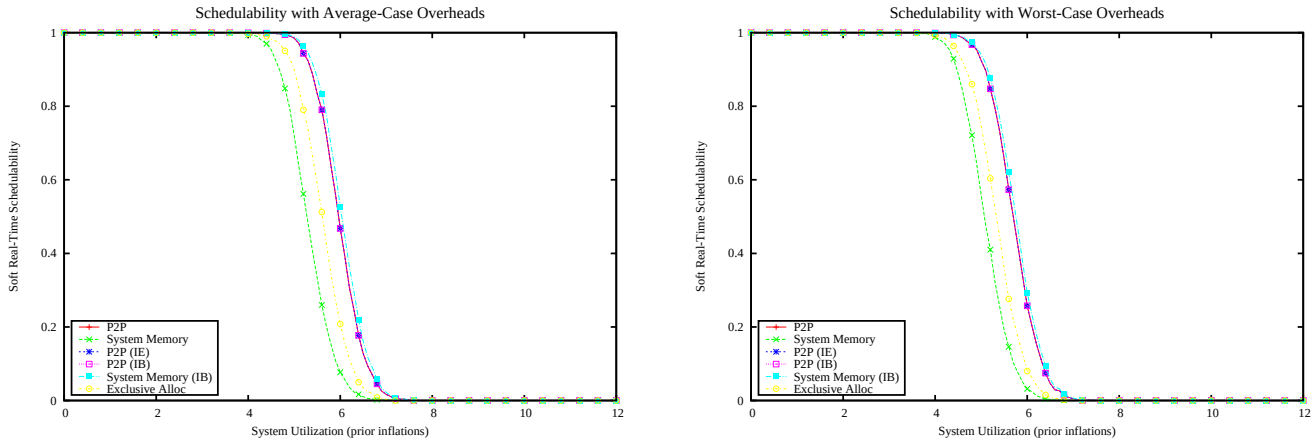

Figure 4358: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

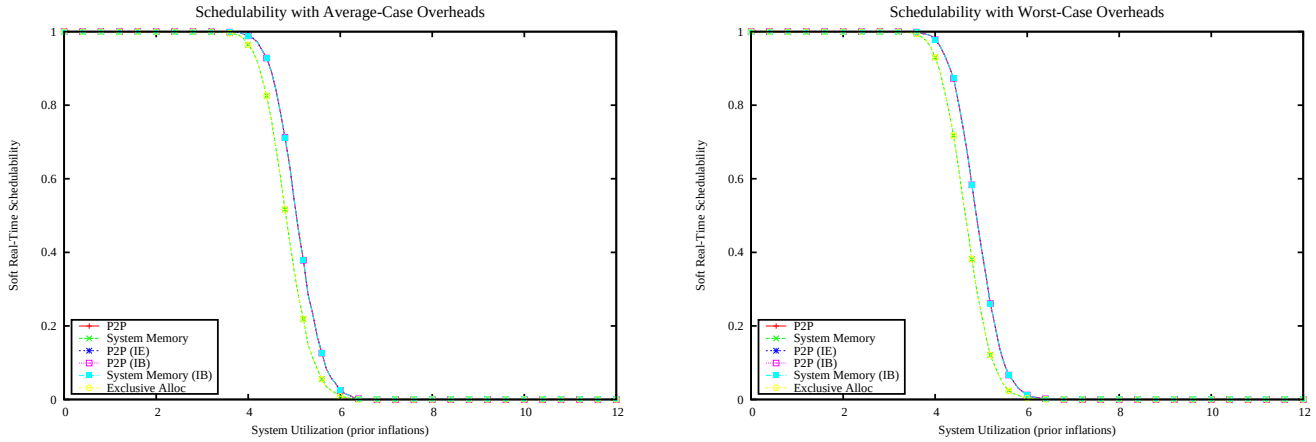

Figure 4359: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

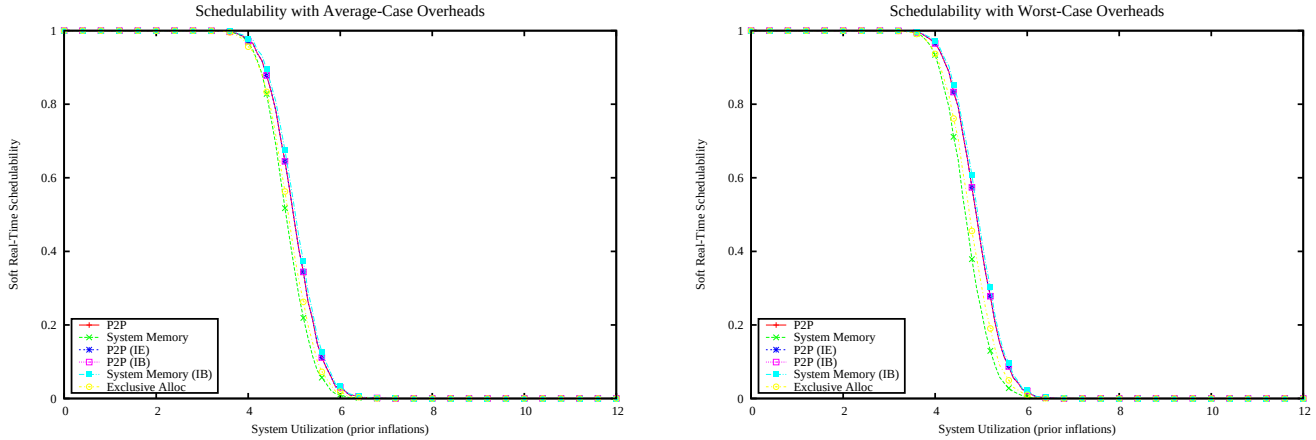

Figure 4360: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

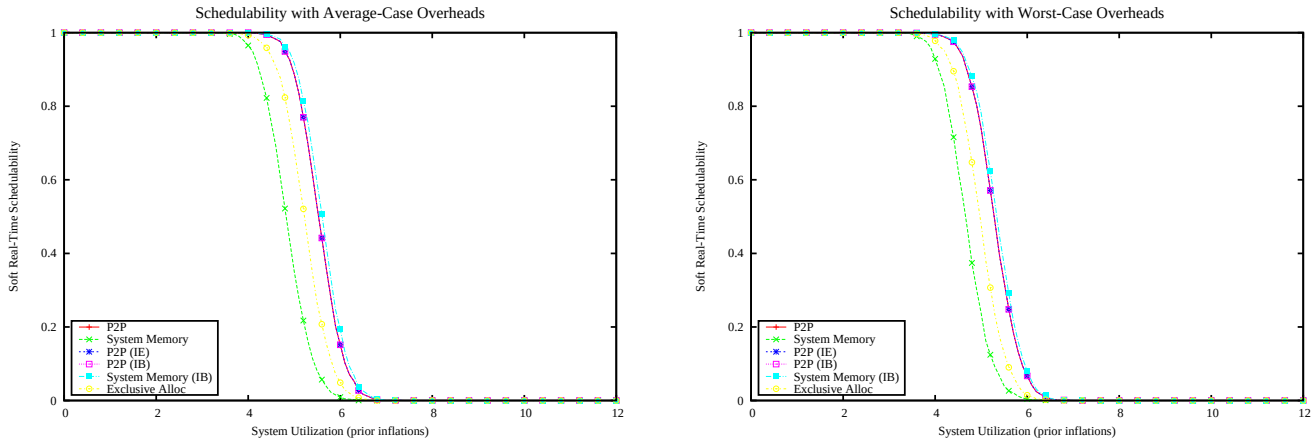

Figure 4361: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

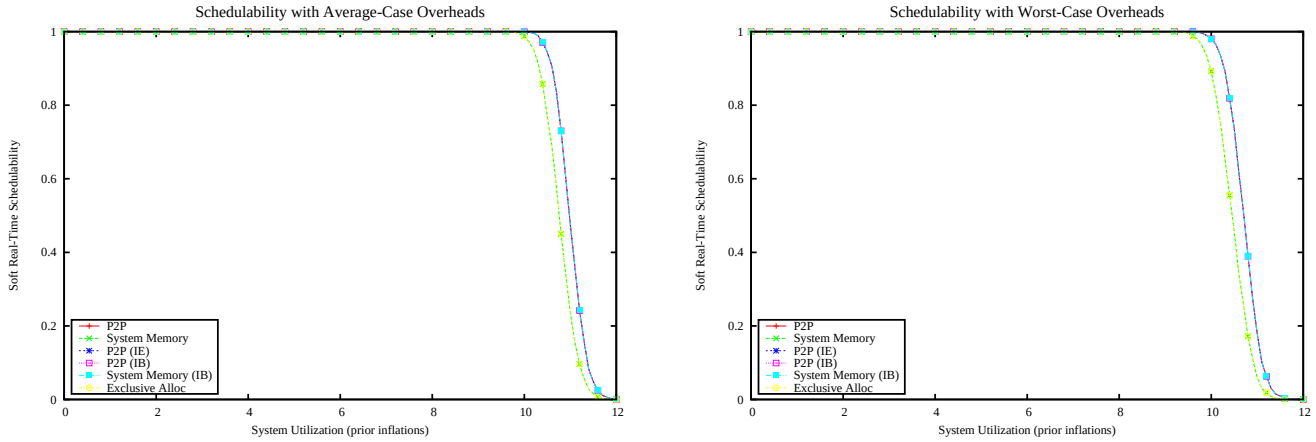

Figure 4362: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

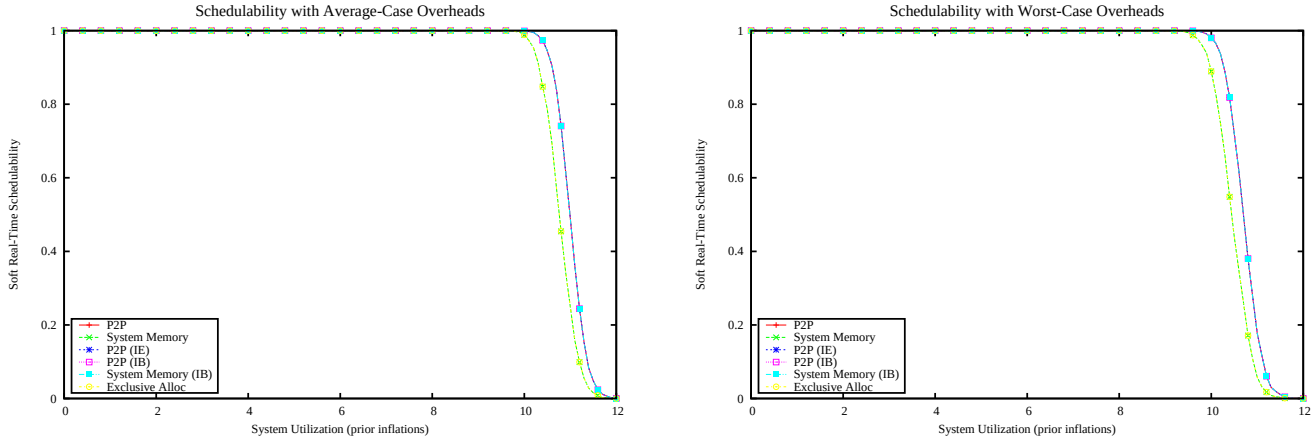

Figure 4363: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

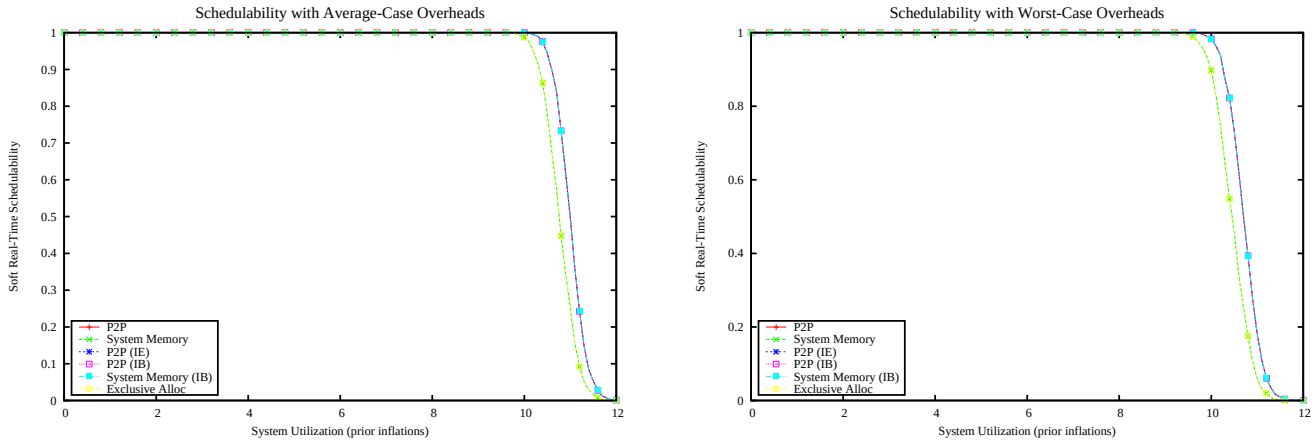

Figure 4364: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

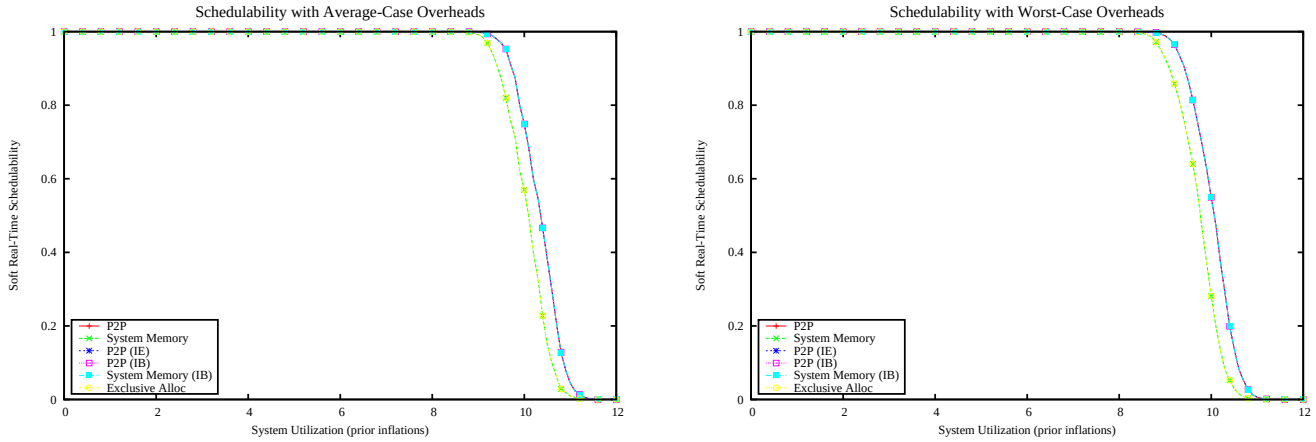

Figure 4365: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

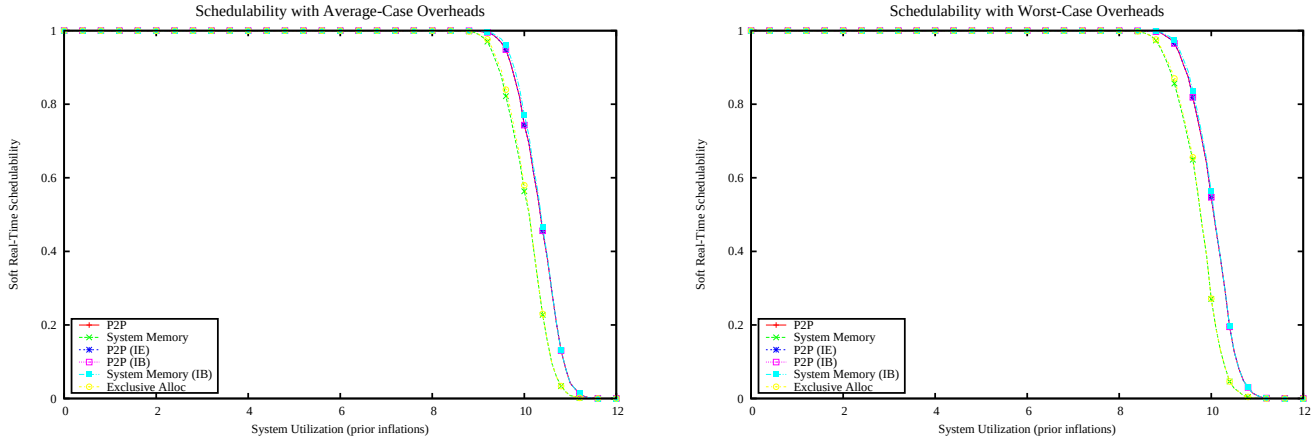

Figure 4366: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

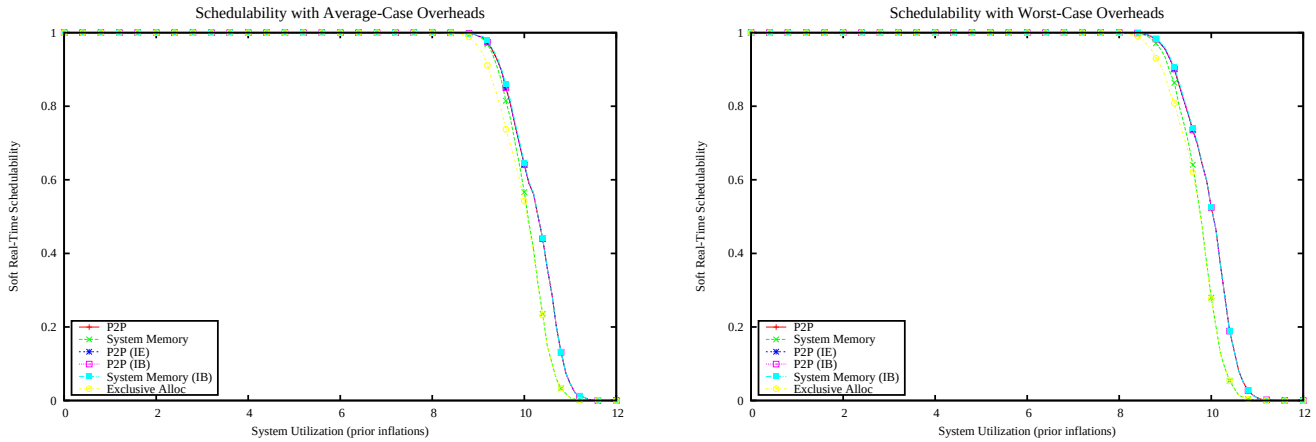

Figure 4367: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

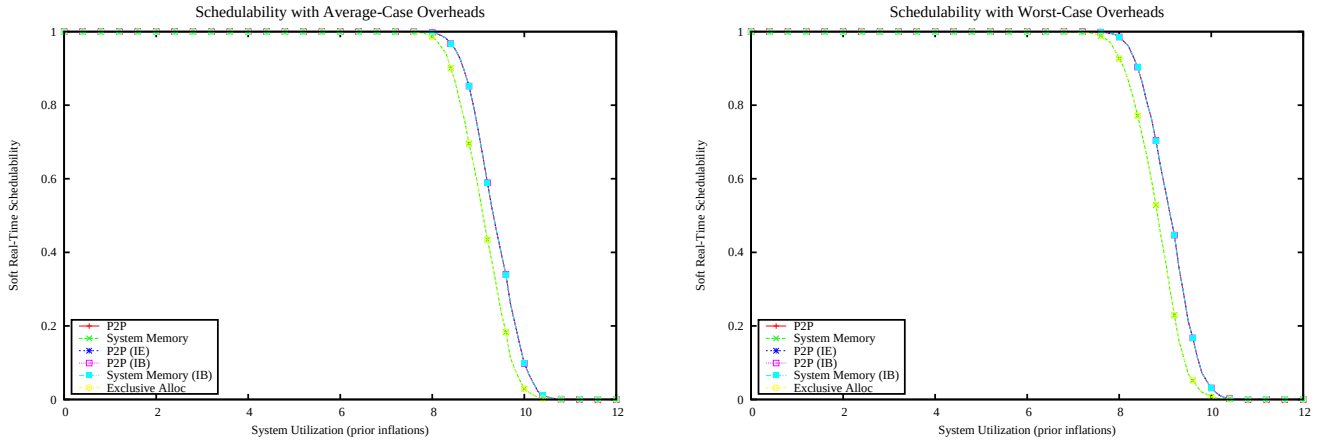

Figure 4368: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

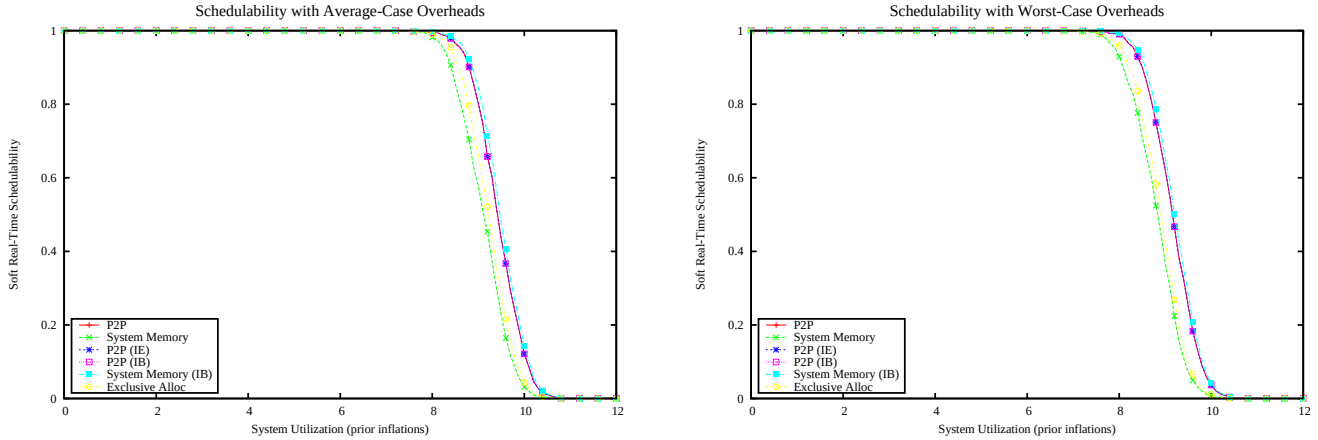

Figure 4369: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

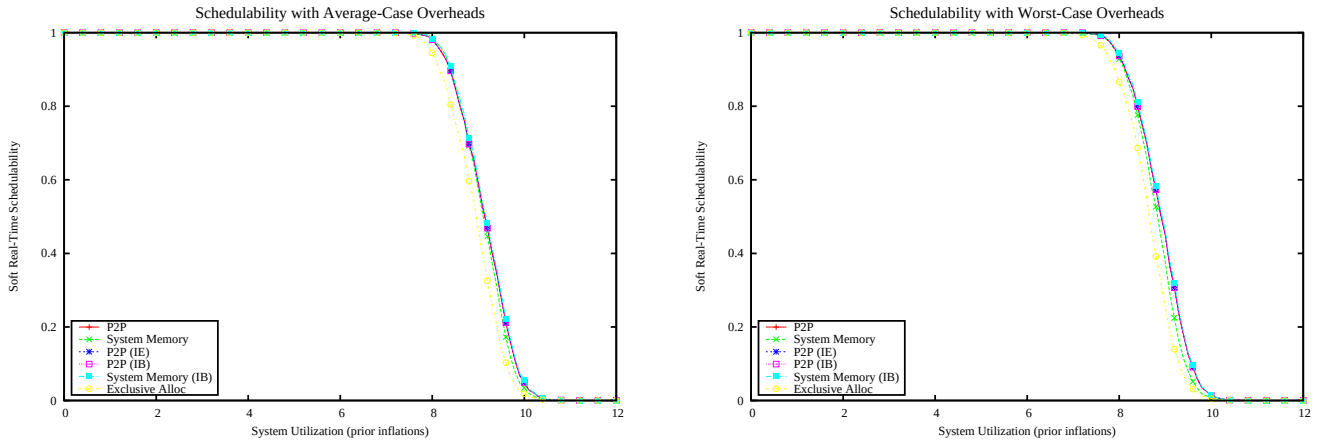

Figure 4370: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

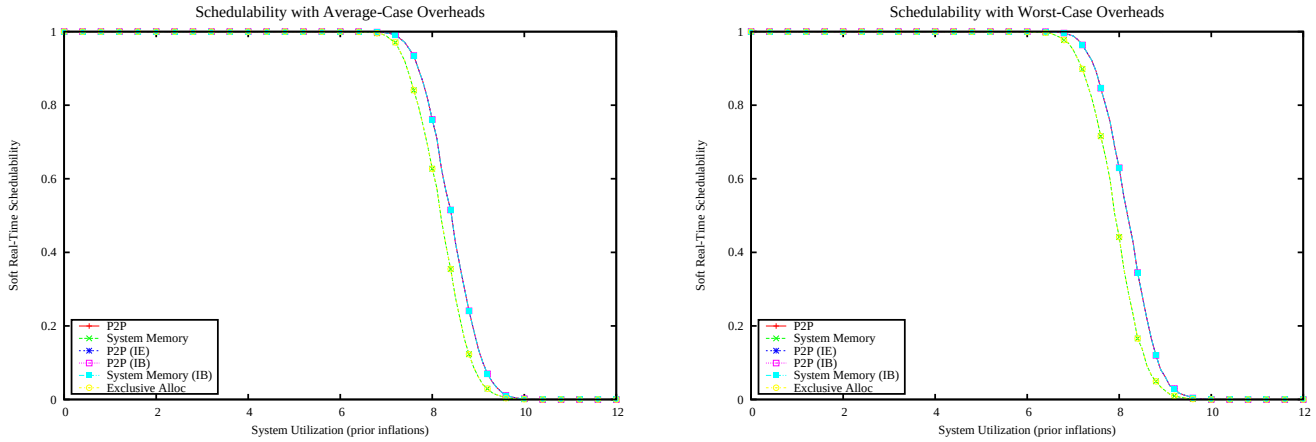

Figure 4371: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

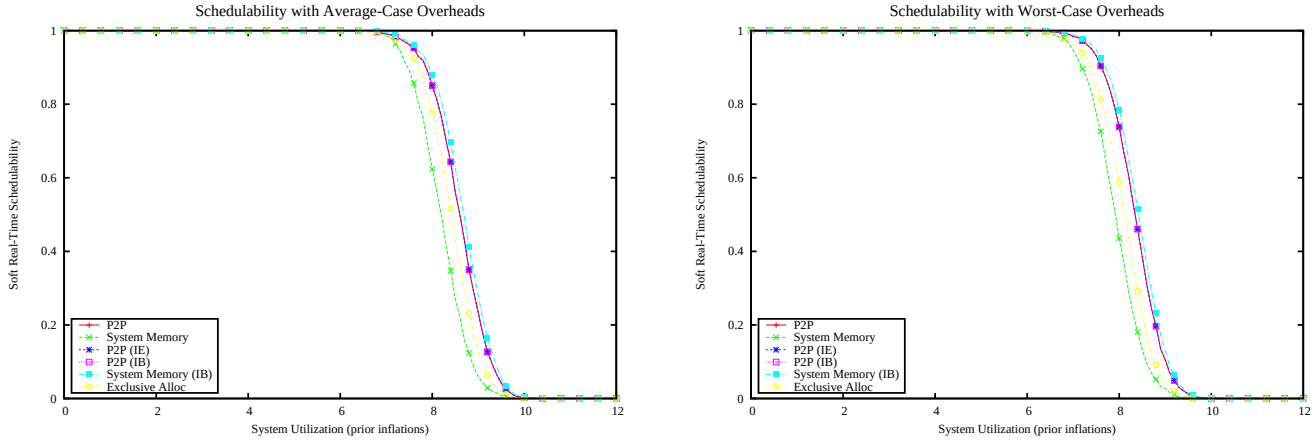

Figure 4372: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

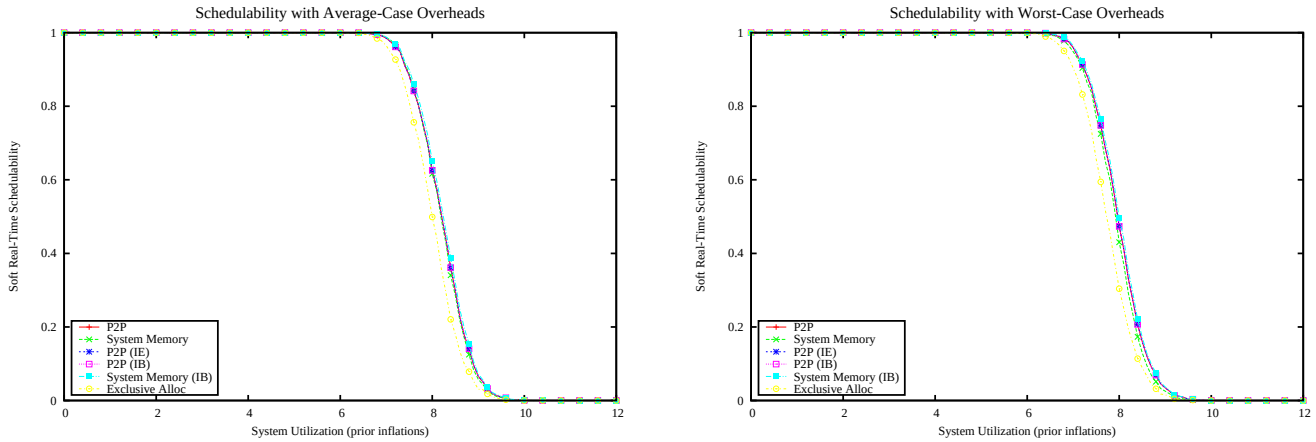

Figure 4373: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

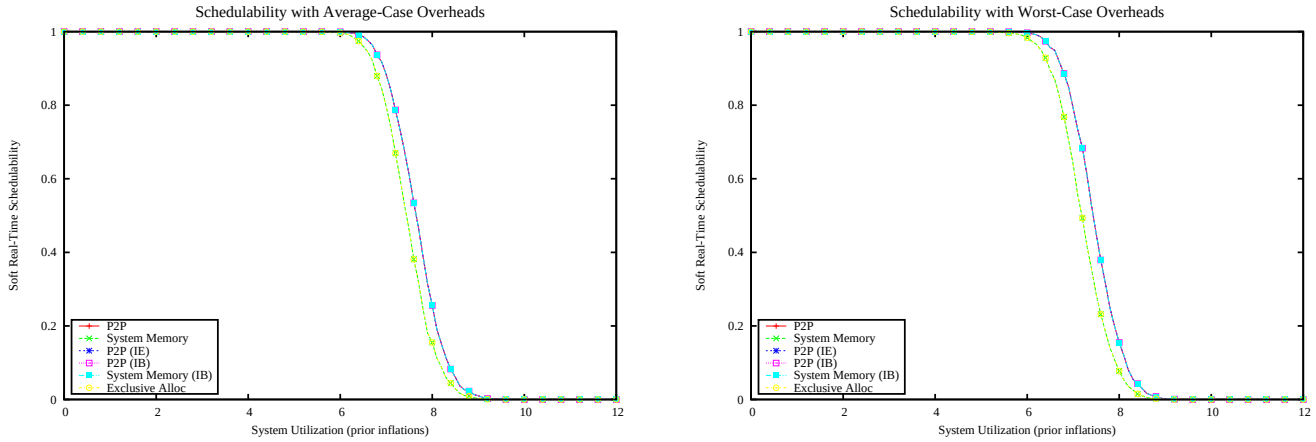

Figure 4374: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

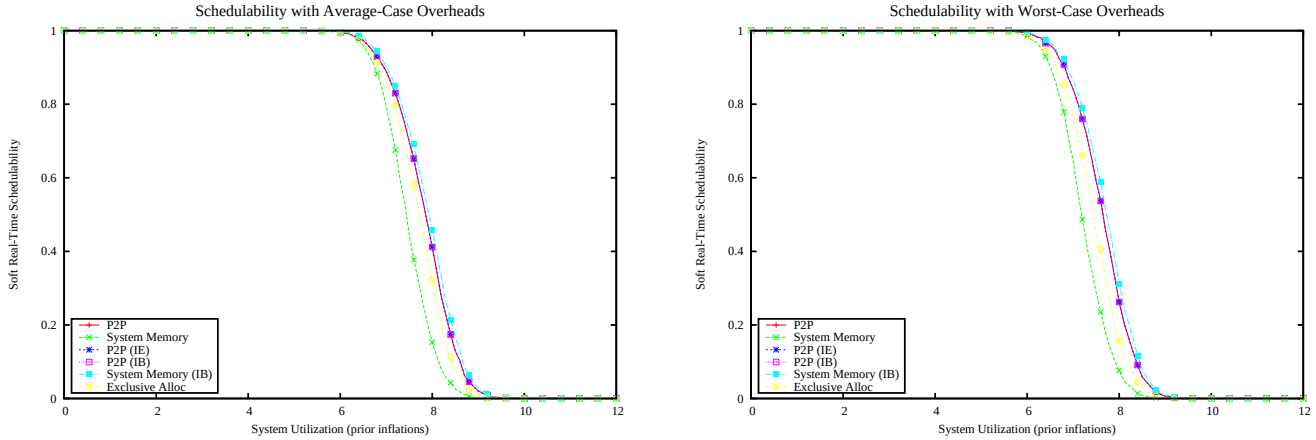

Figure 4375: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

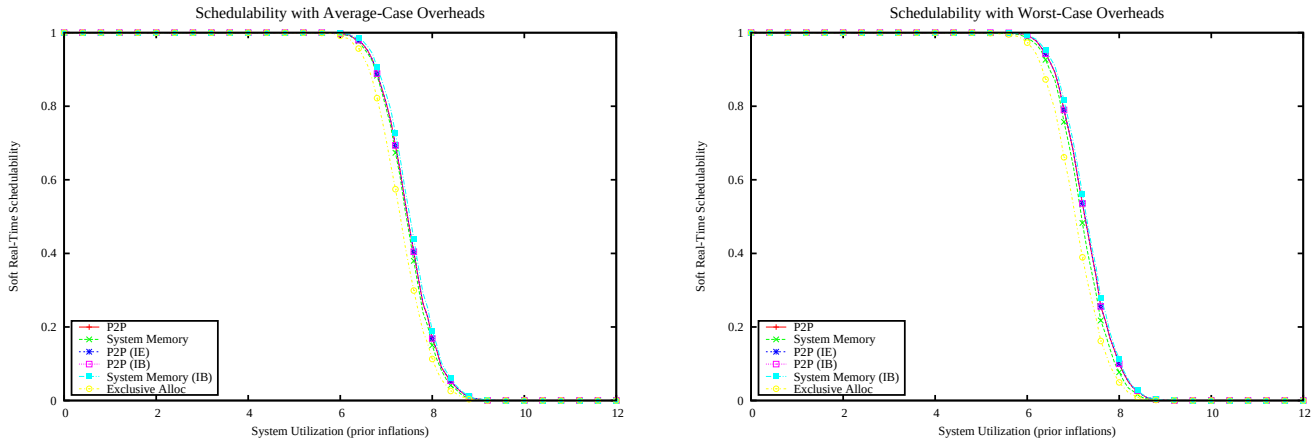

Figure 4376: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

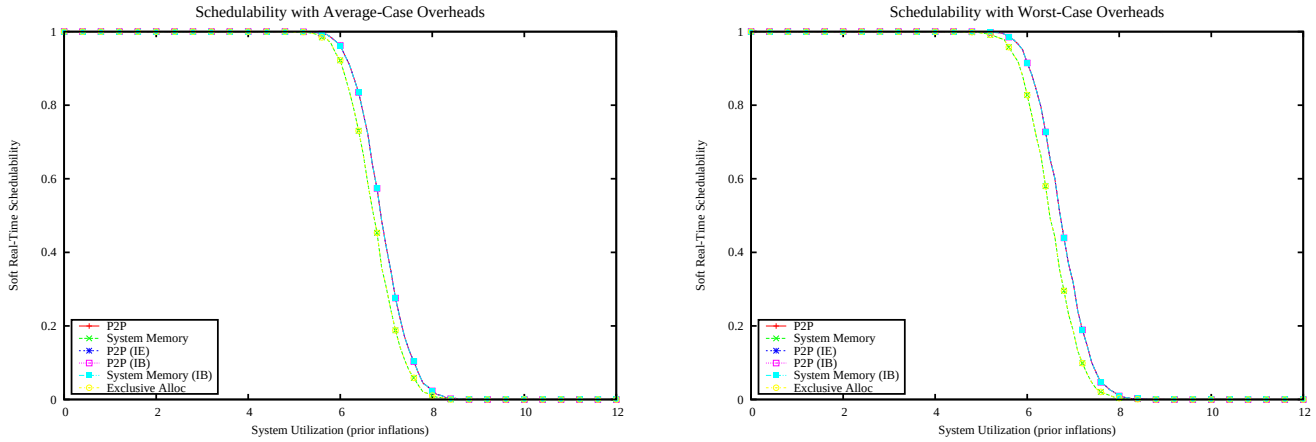

Figure 4377: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

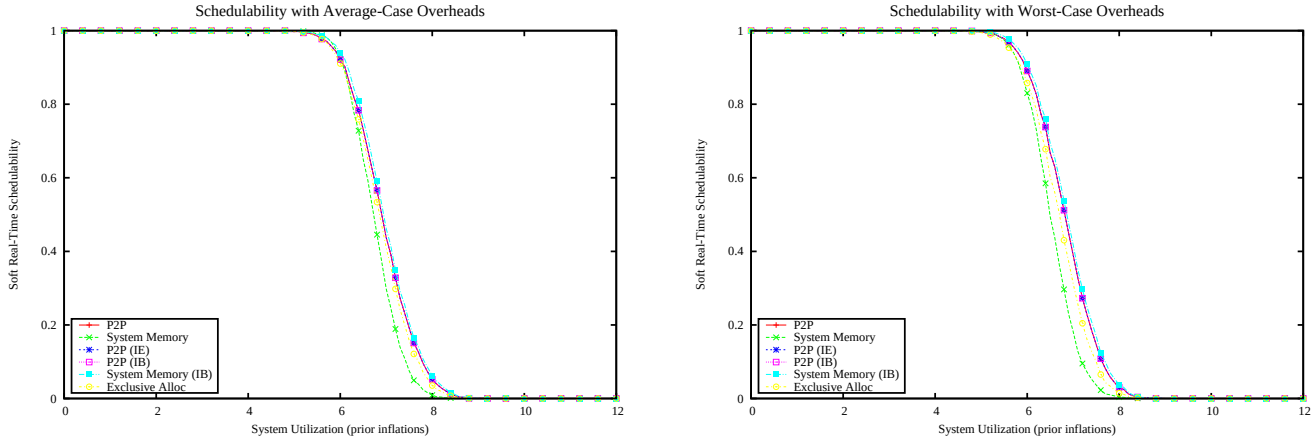

Figure 4378: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

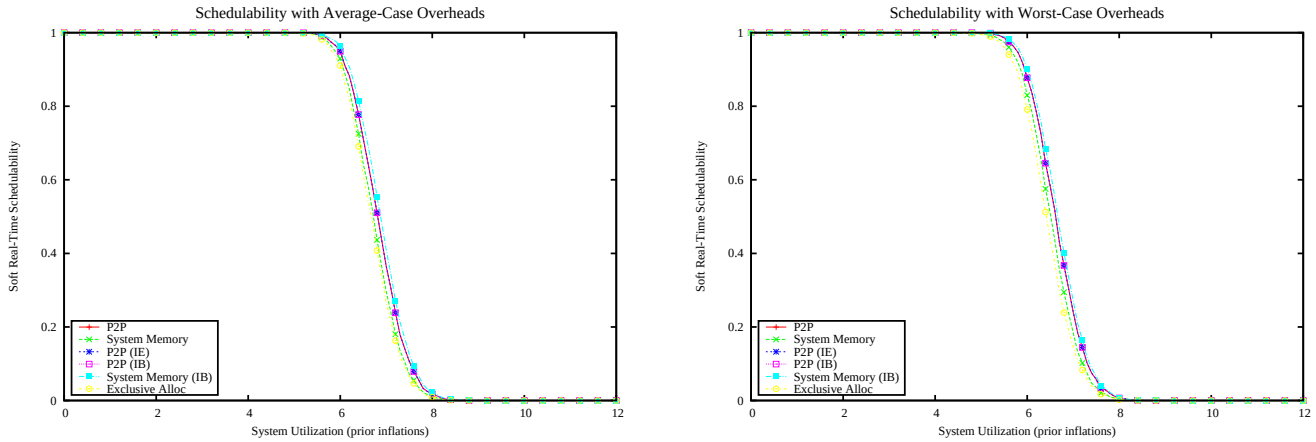

Figure 4379: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

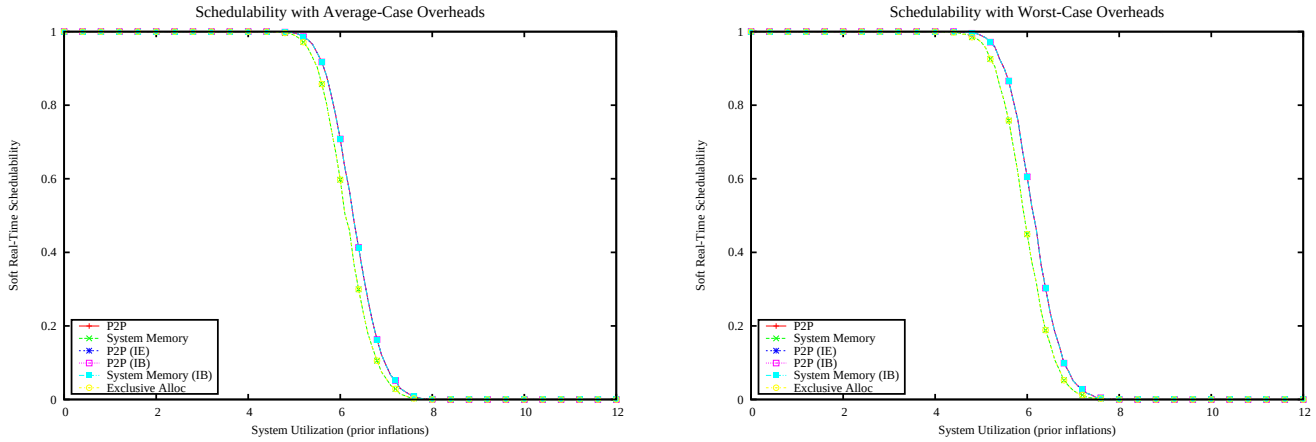

Figure 4380: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

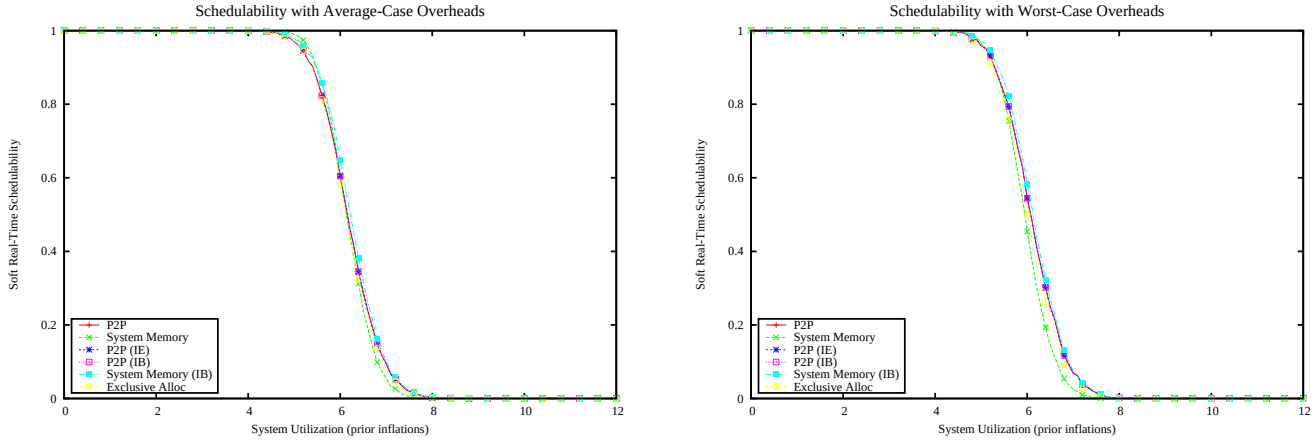

Figure 4381: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

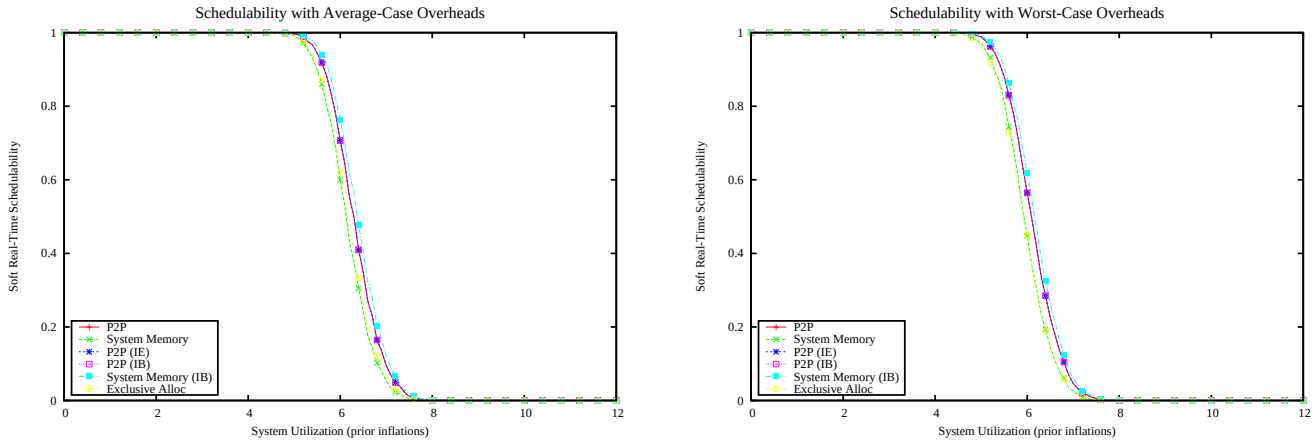

Figure 4382: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

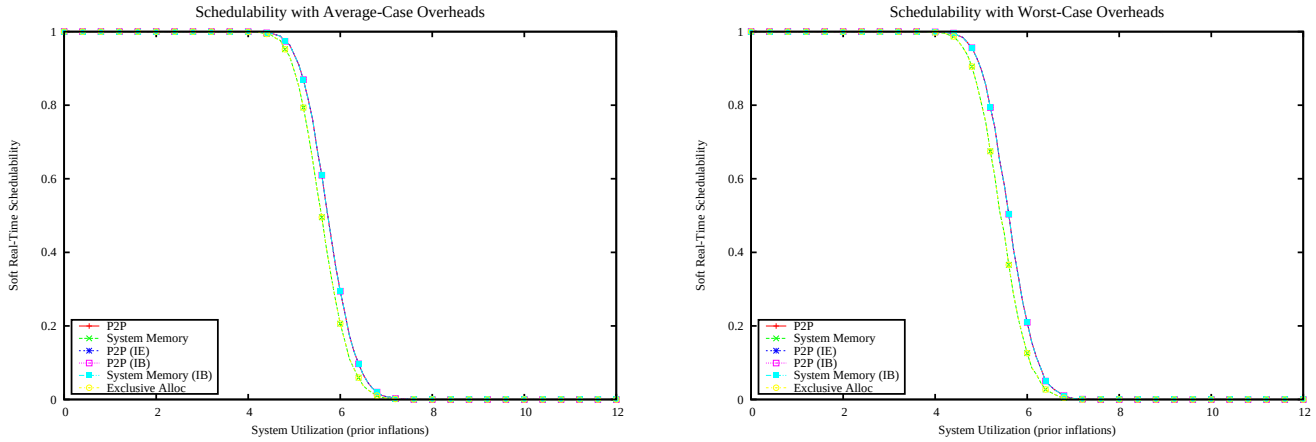

Figure 4383: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

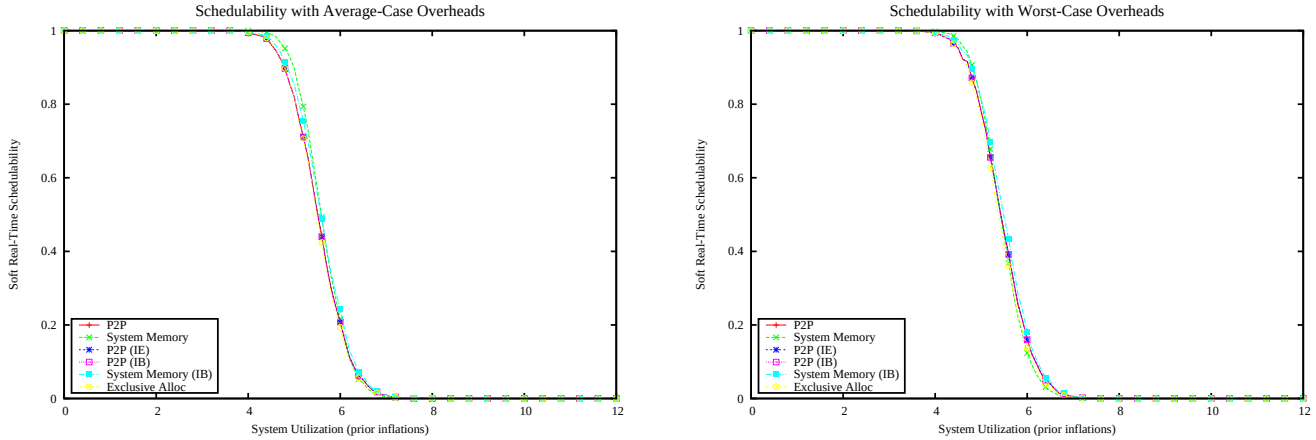

Figure 4384: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

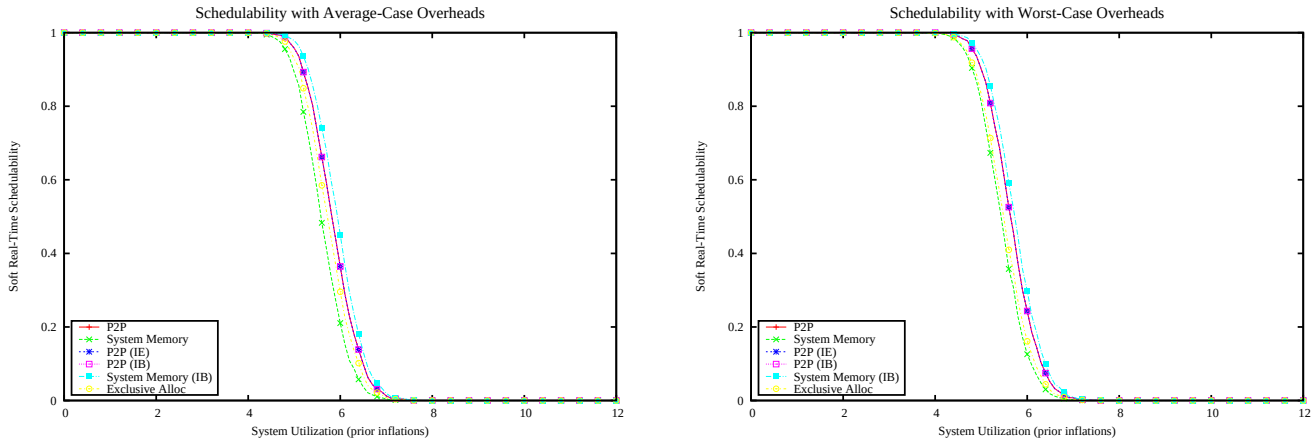

Figure 4385: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

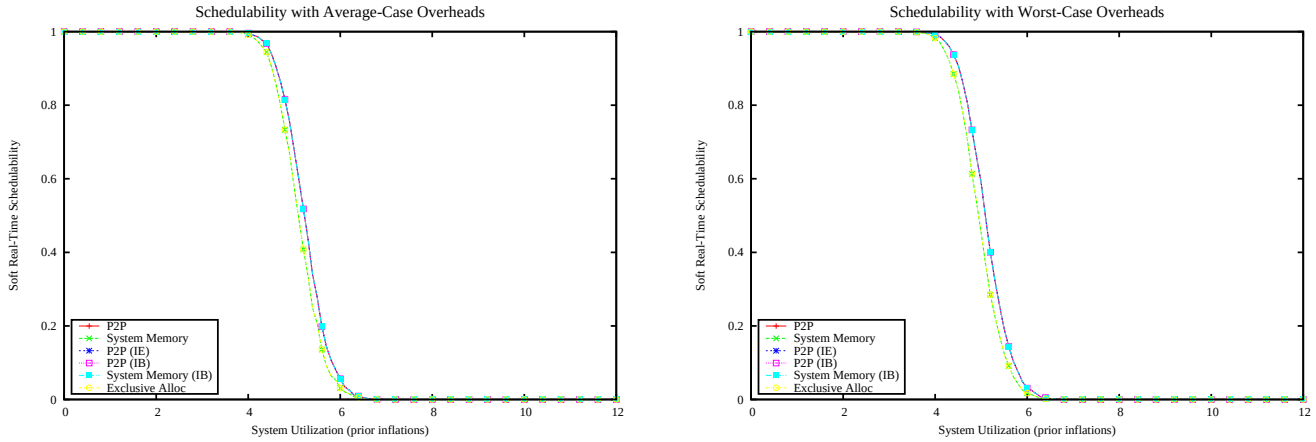

Figure 4386: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

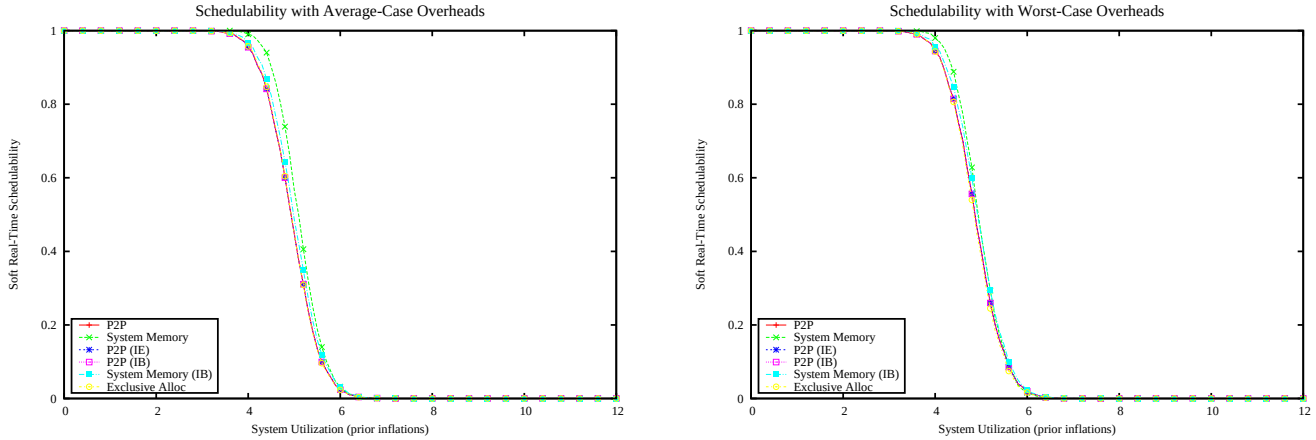

Figure 4387: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

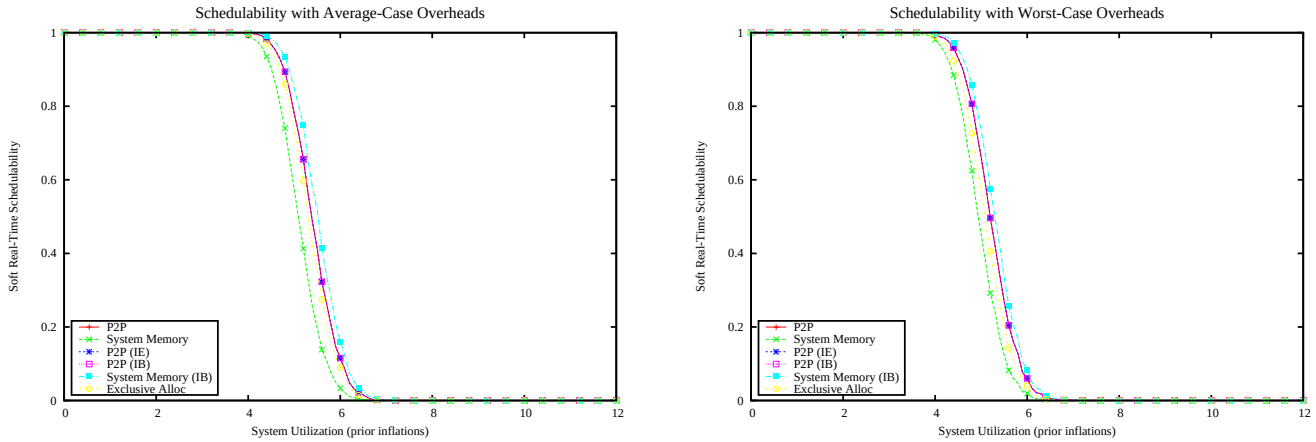

Figure 4388: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

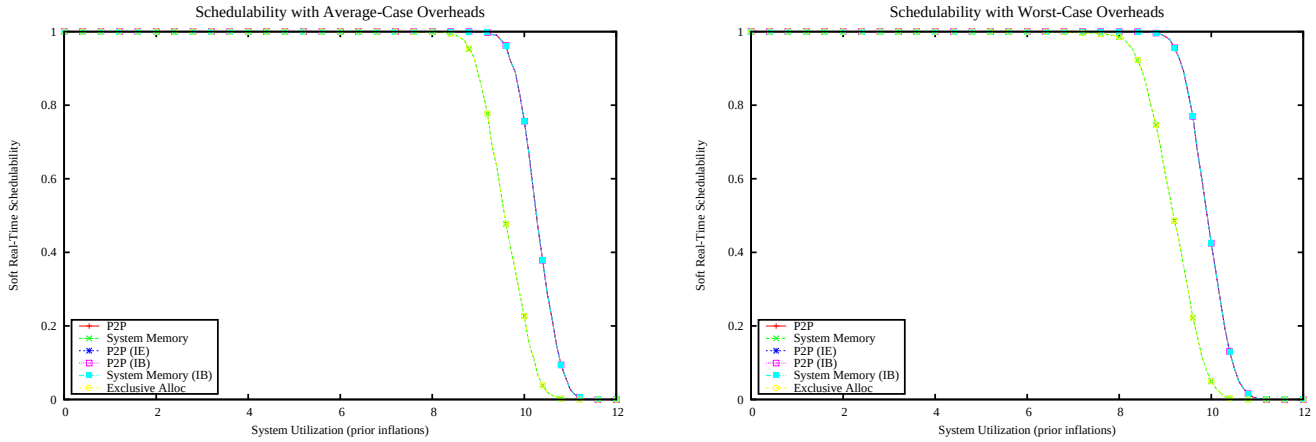

Figure 4389: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

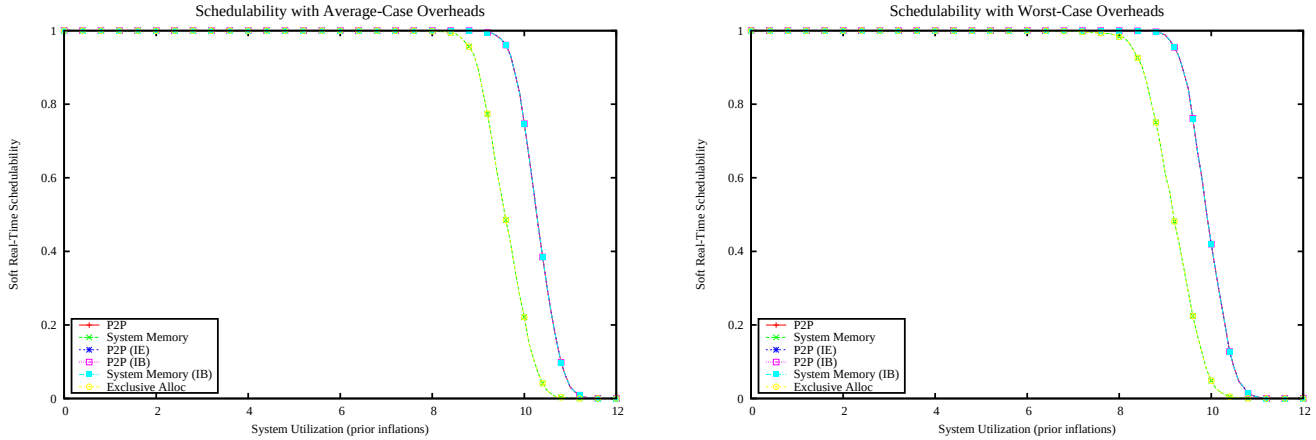

Figure 4390: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

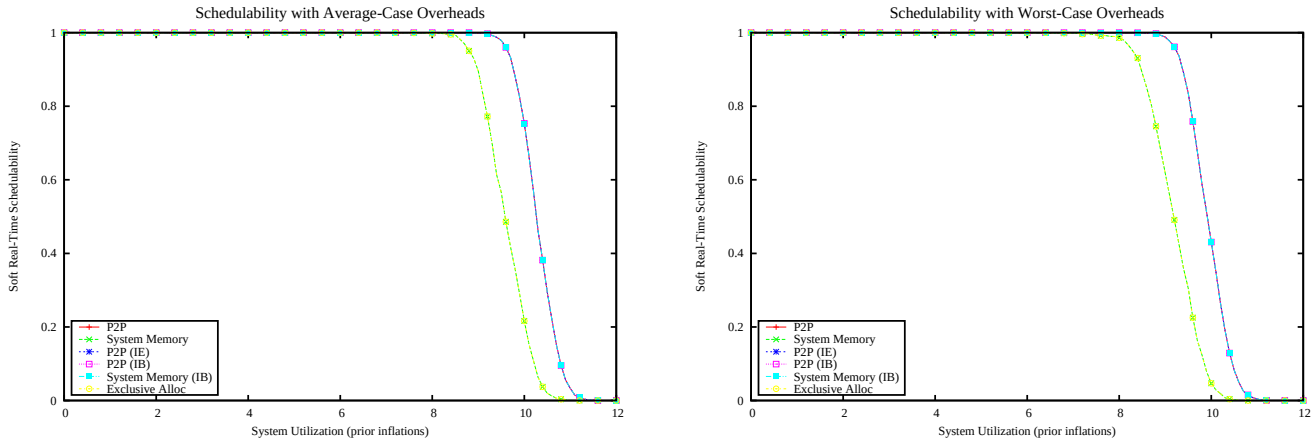

Figure 4391: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

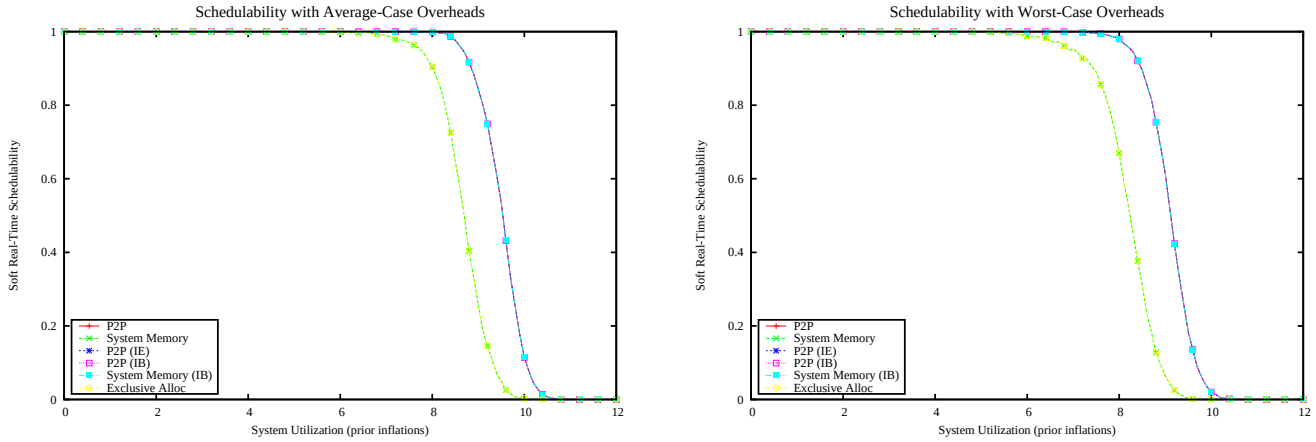

Figure 4392: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

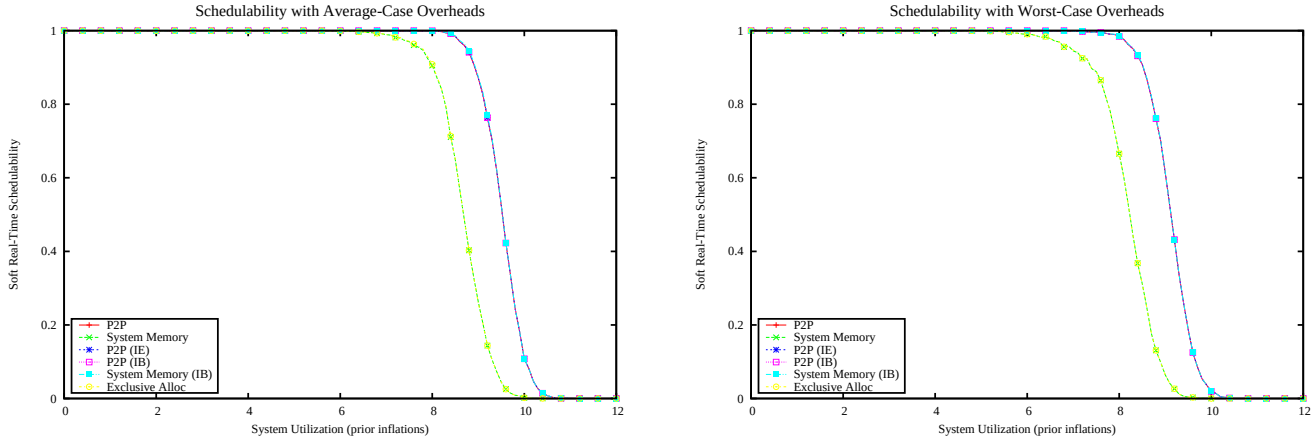

Figure 4393: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

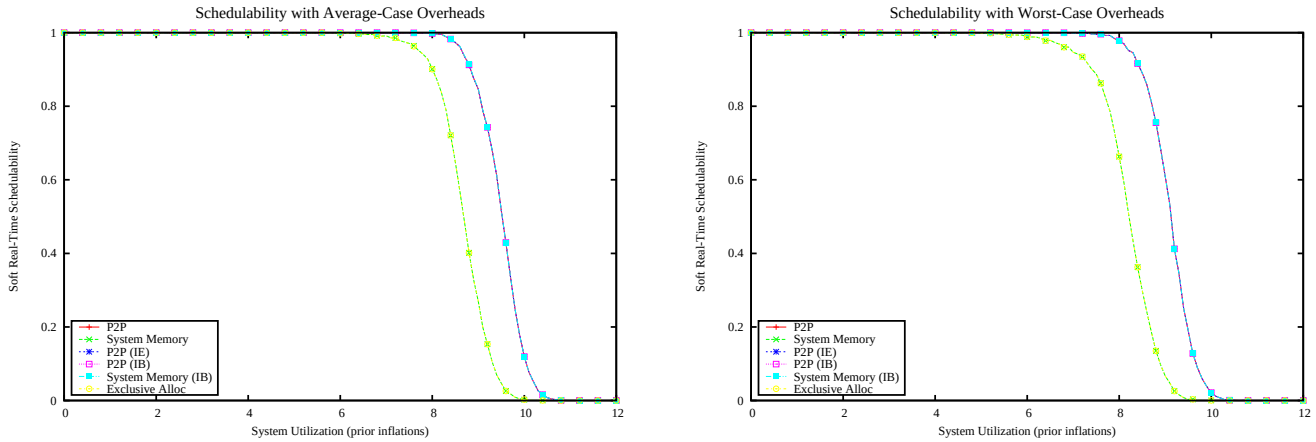

Figure 4394: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

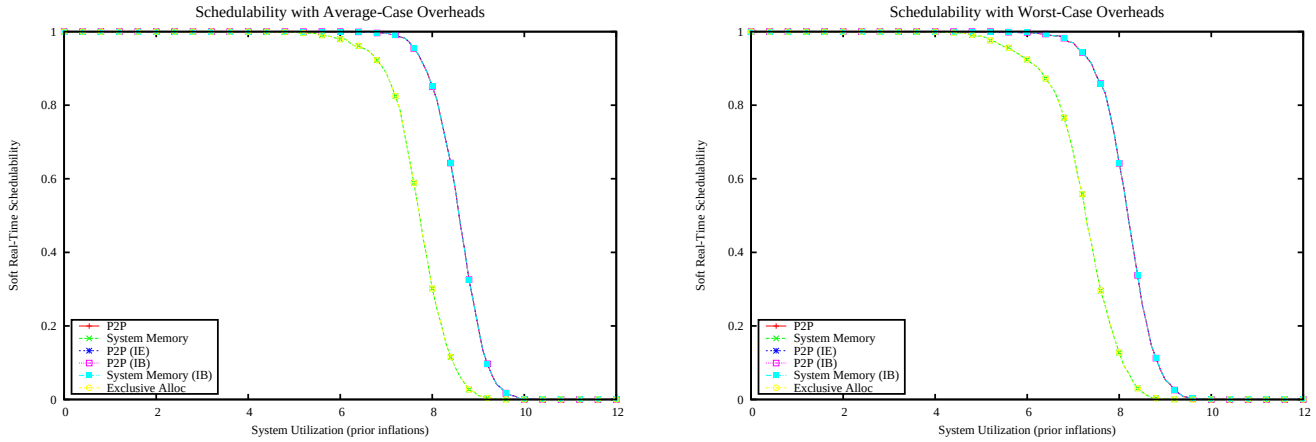

Figure 4395: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

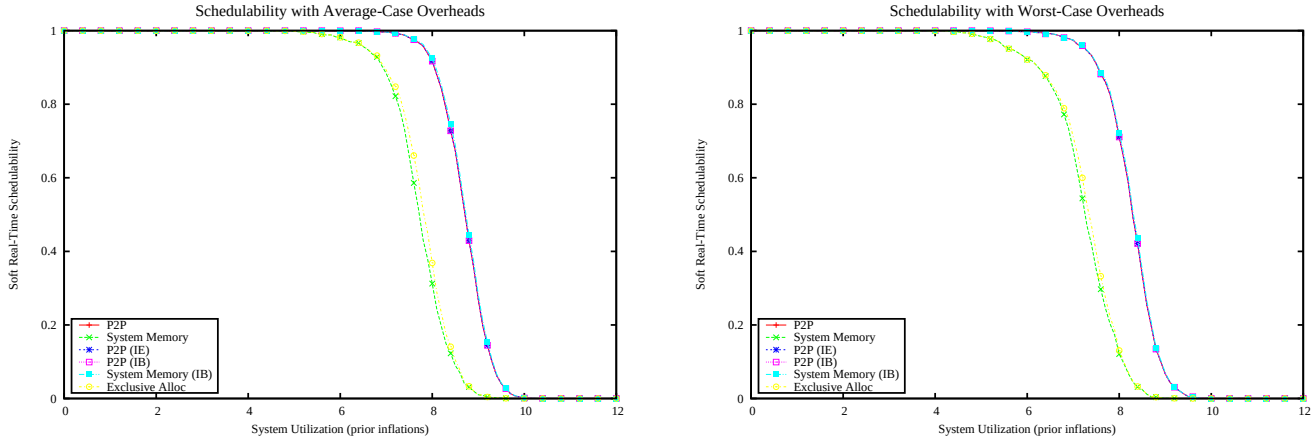

Figure 4396: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

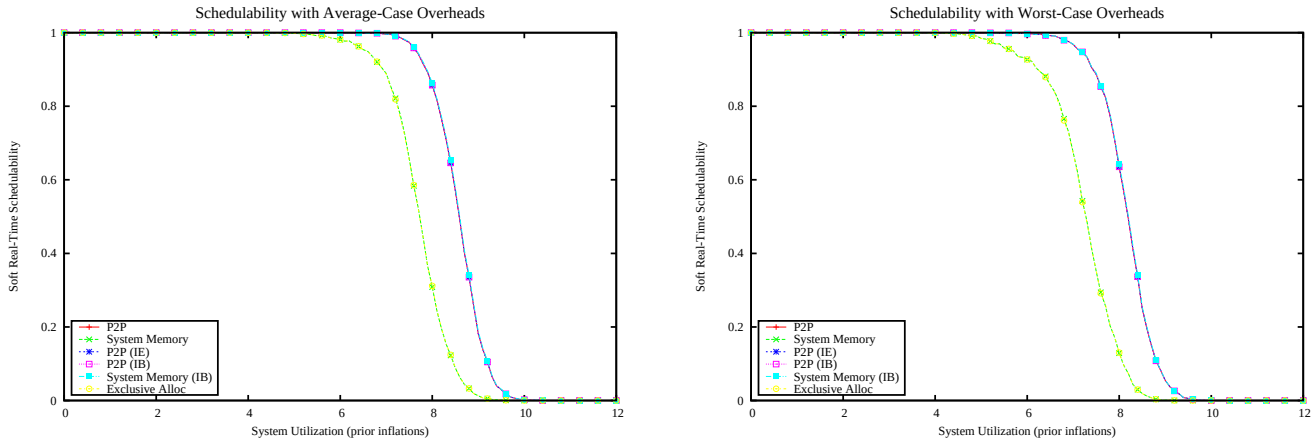

Figure 4397: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

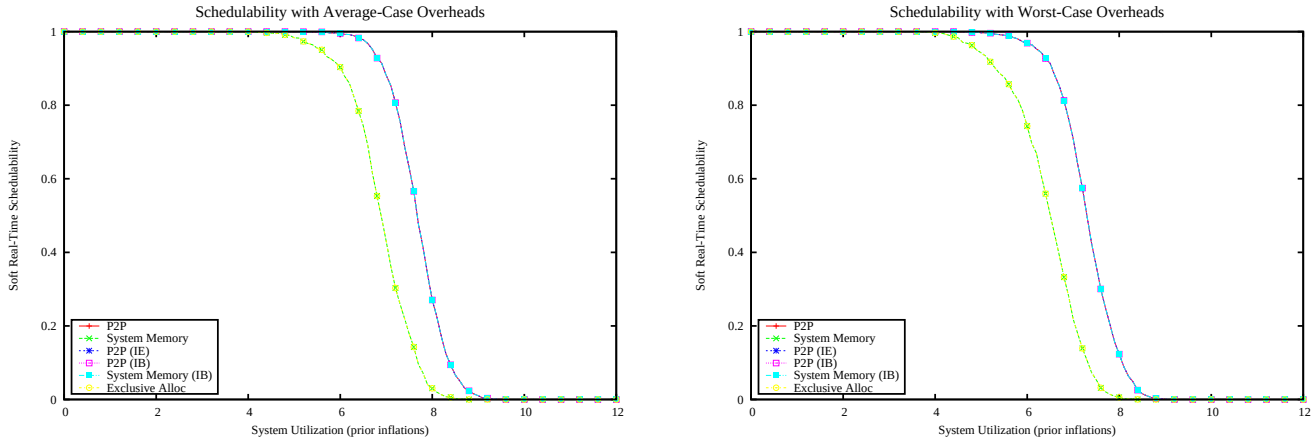

Figure 4398: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

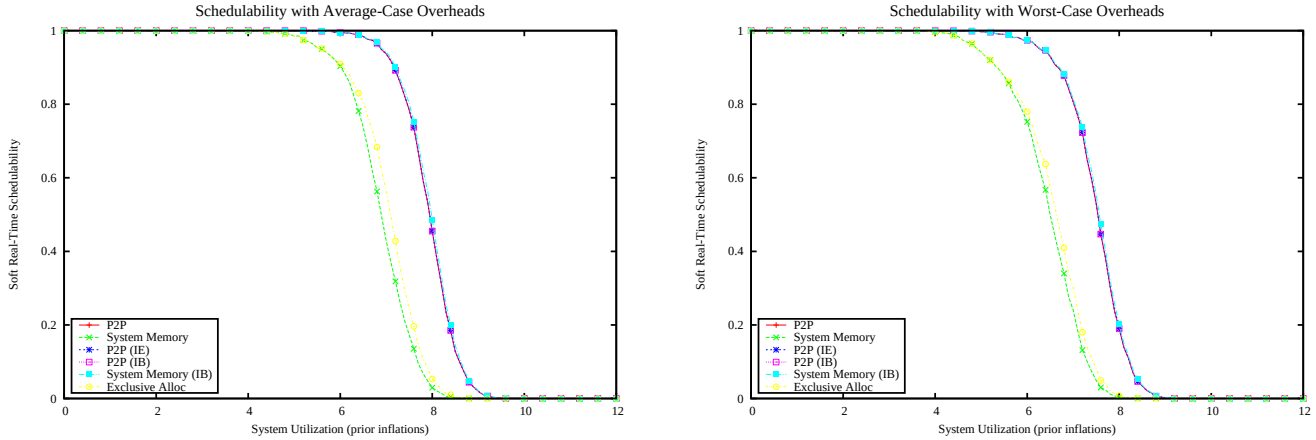

Figure 4399: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

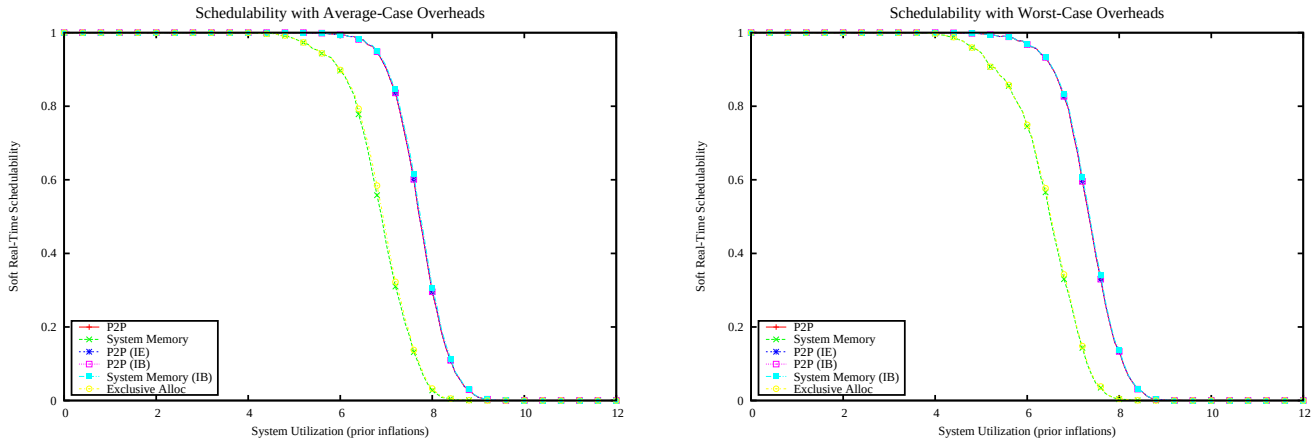

Figure 4400: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

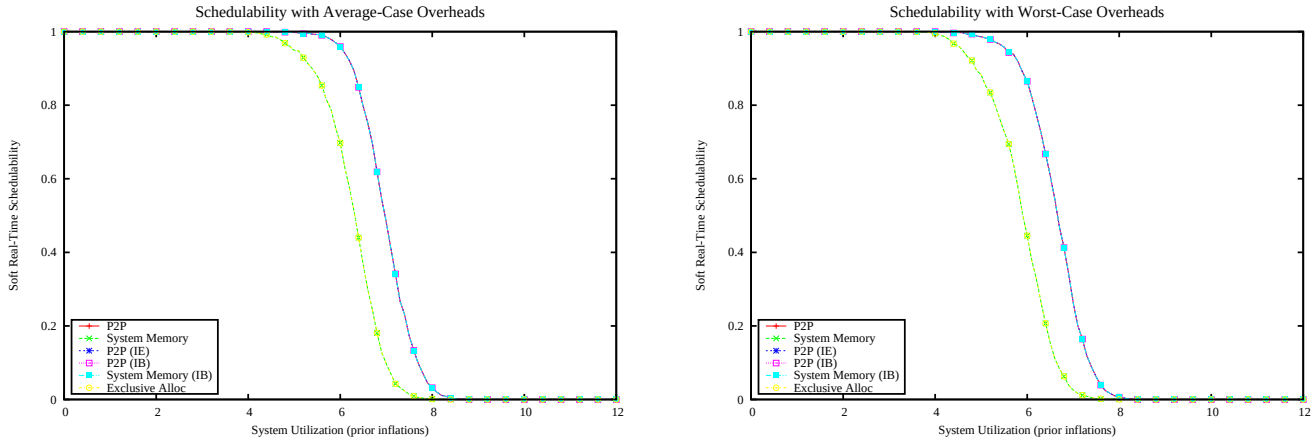

Figure 4401: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

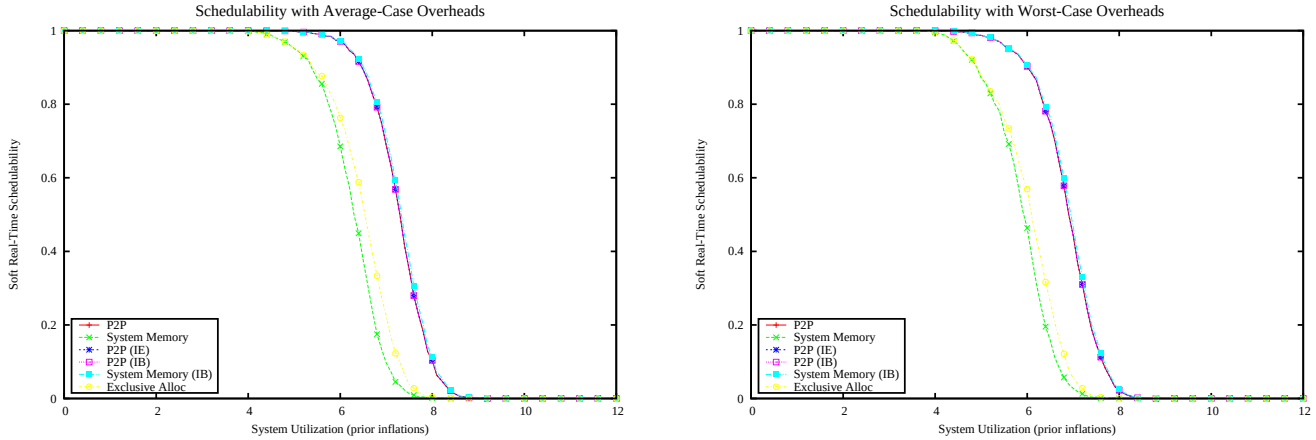

Figure 4402: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

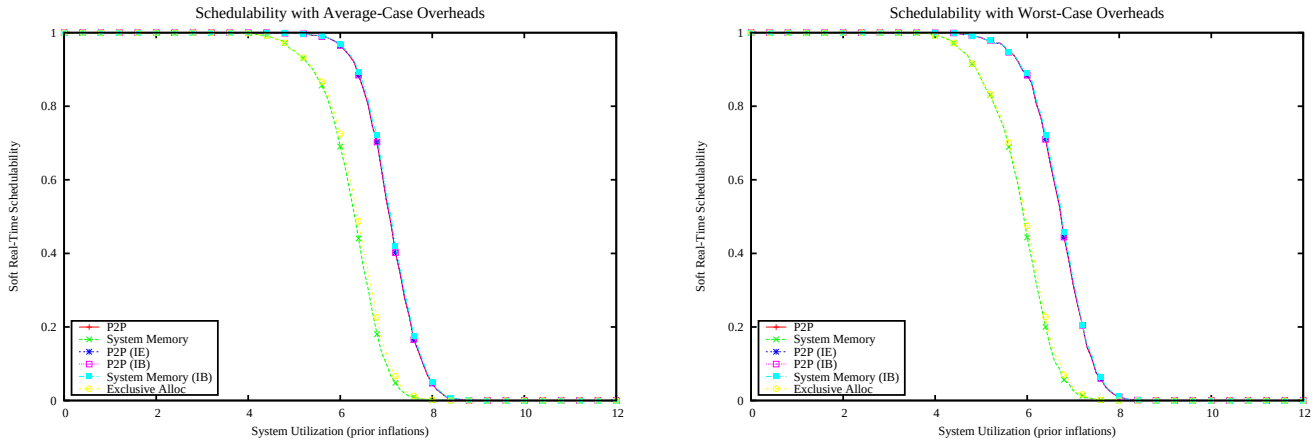

Figure 4403: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

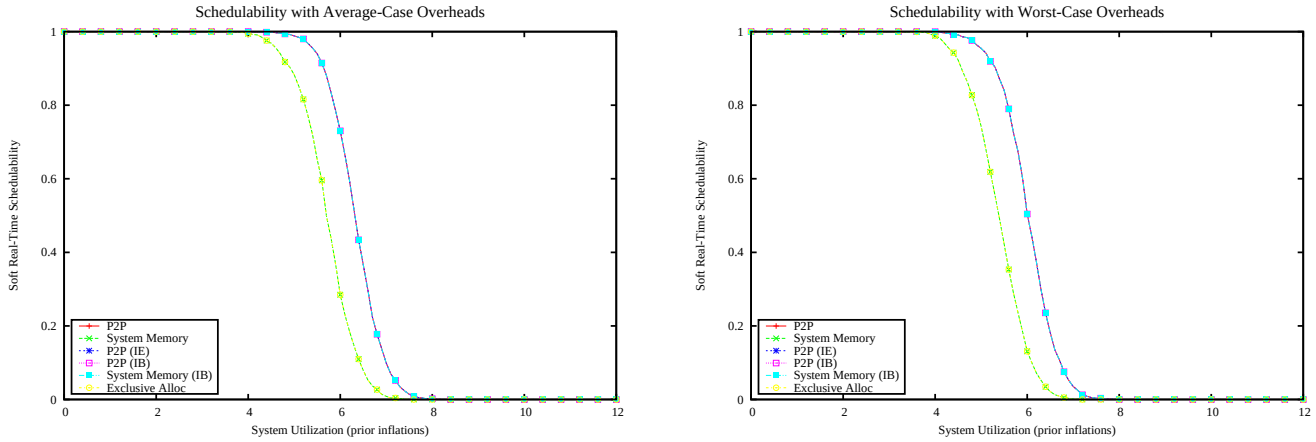

Figure 4404: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

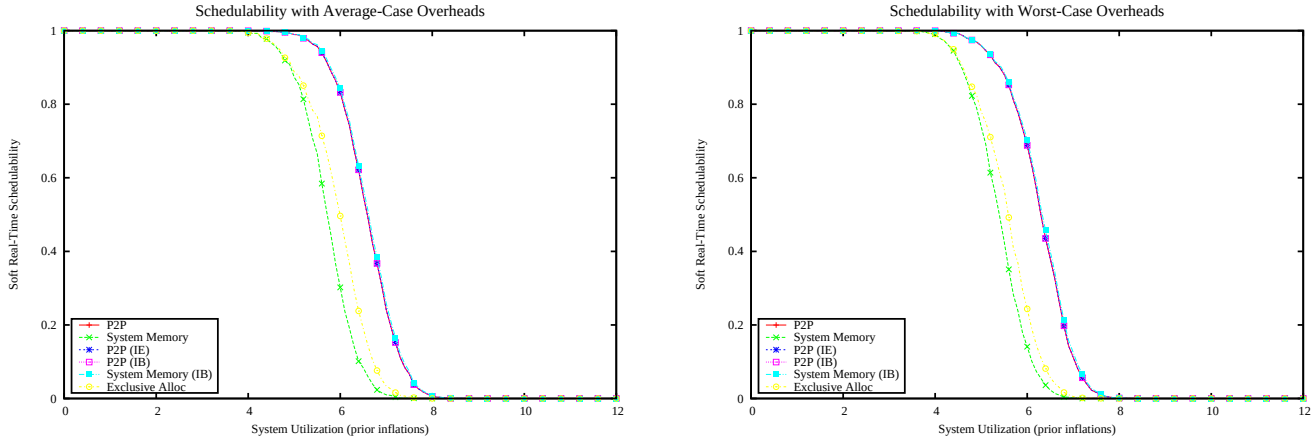

Figure 4405: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

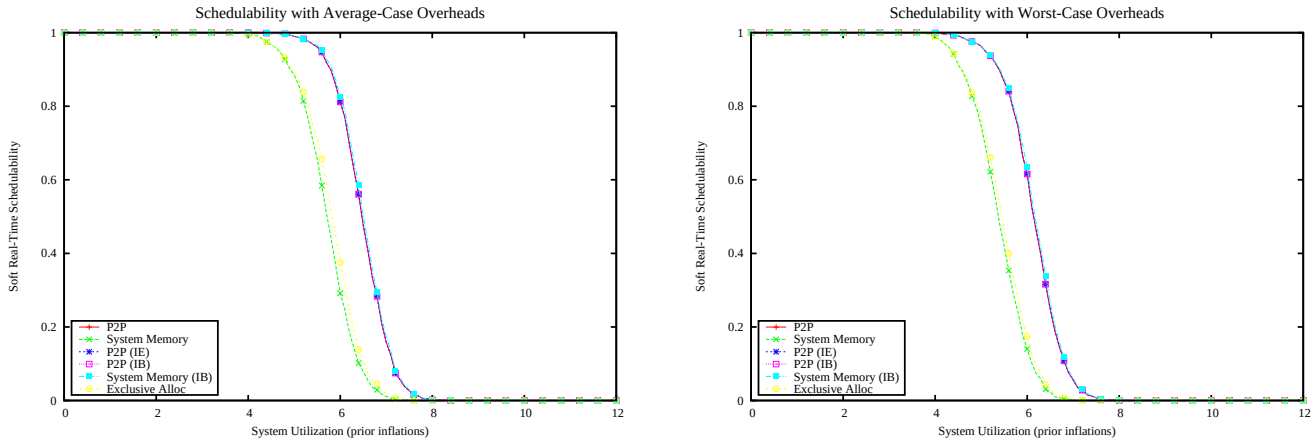

Figure 4406: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

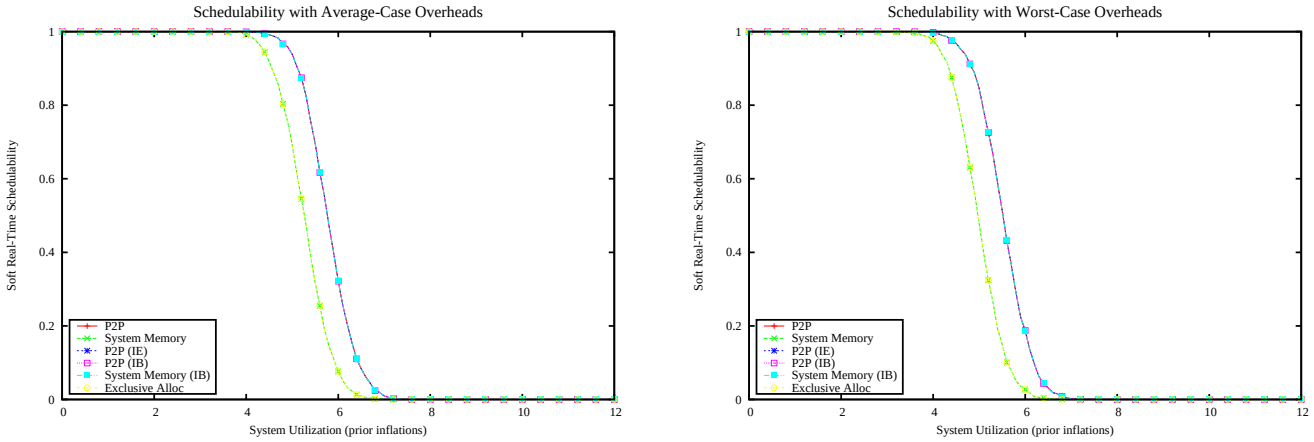

Figure 4407: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

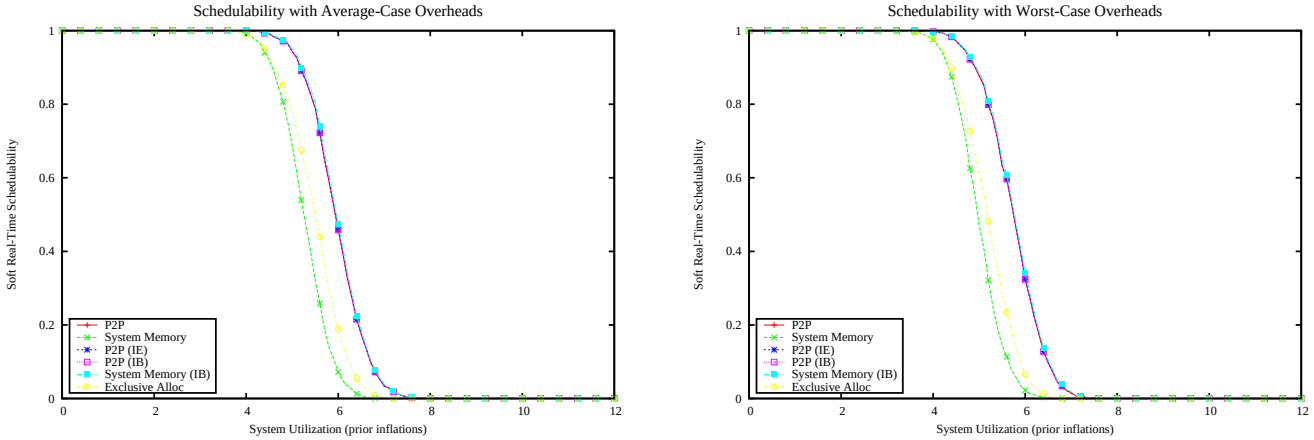

Figure 4408: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

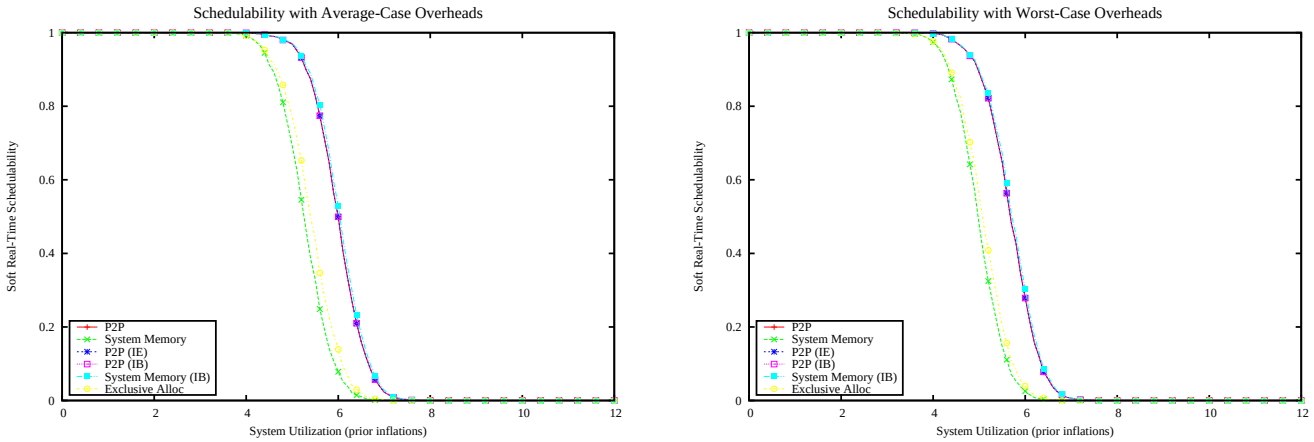

Figure 4409: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

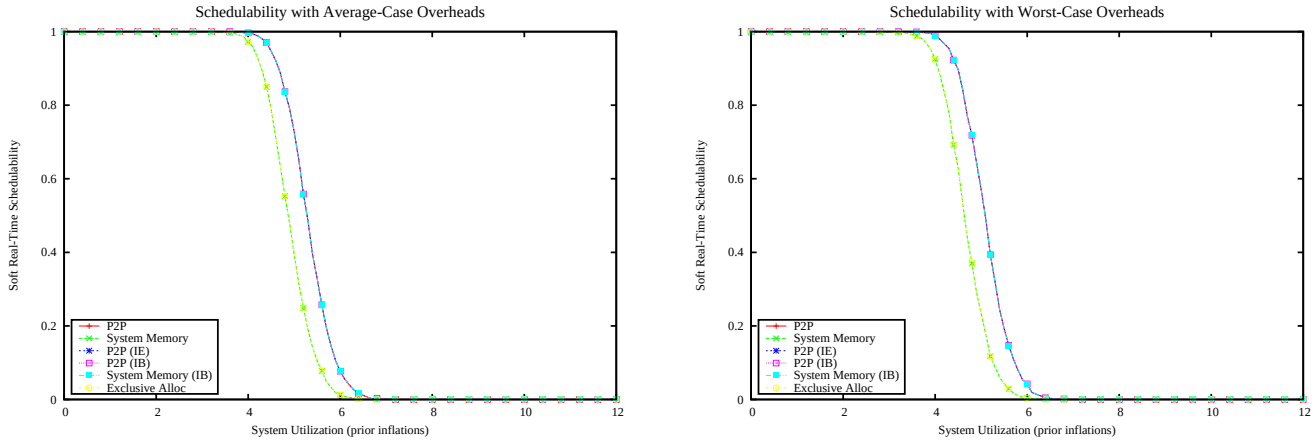

Figure 4410: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

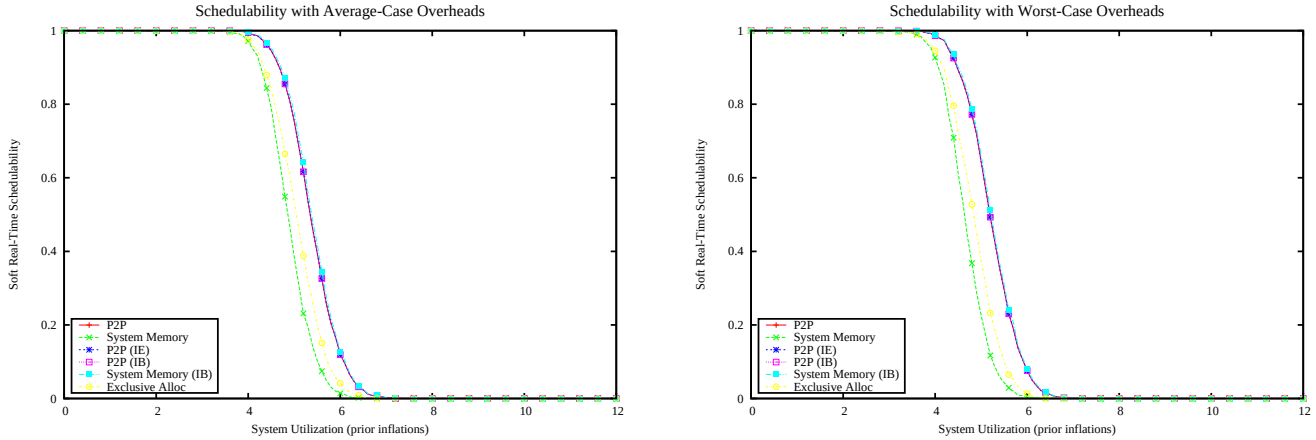

Figure 4411: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

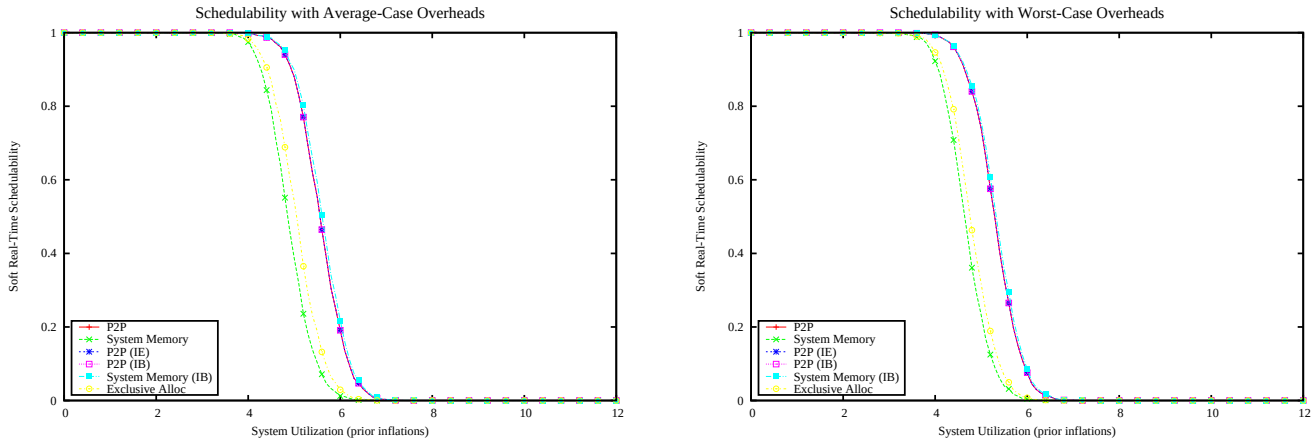

Figure 4412: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

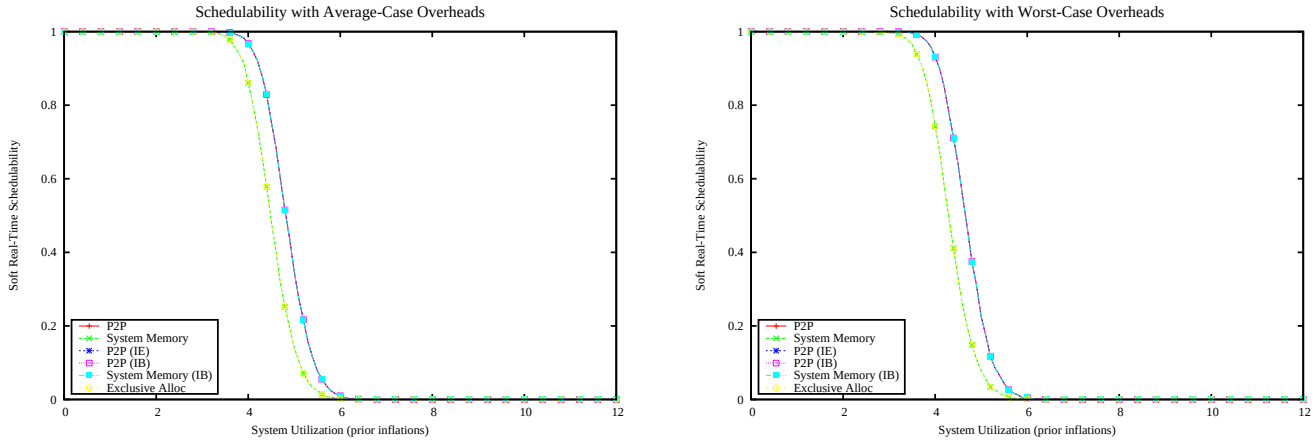

Figure 4413: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

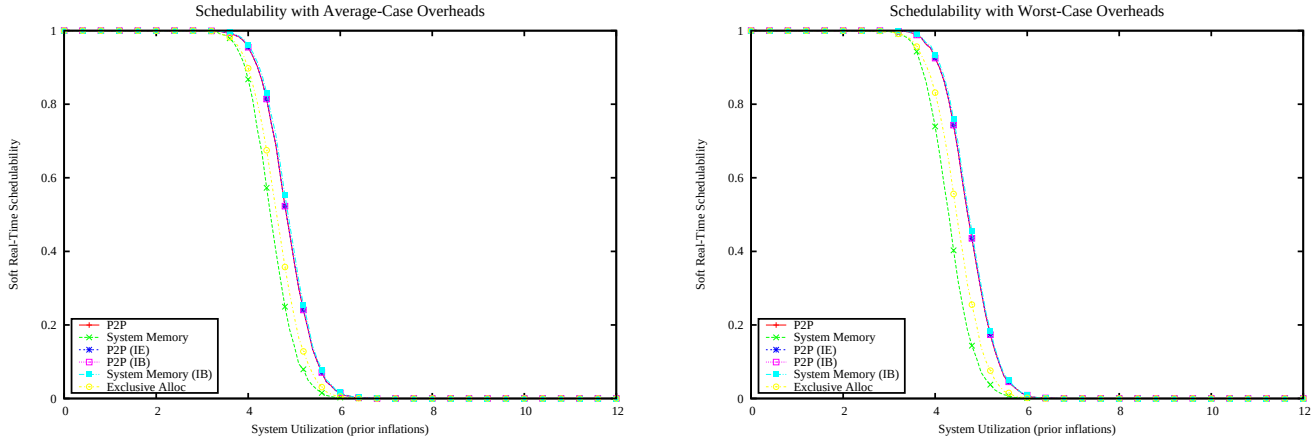

Figure 4414: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

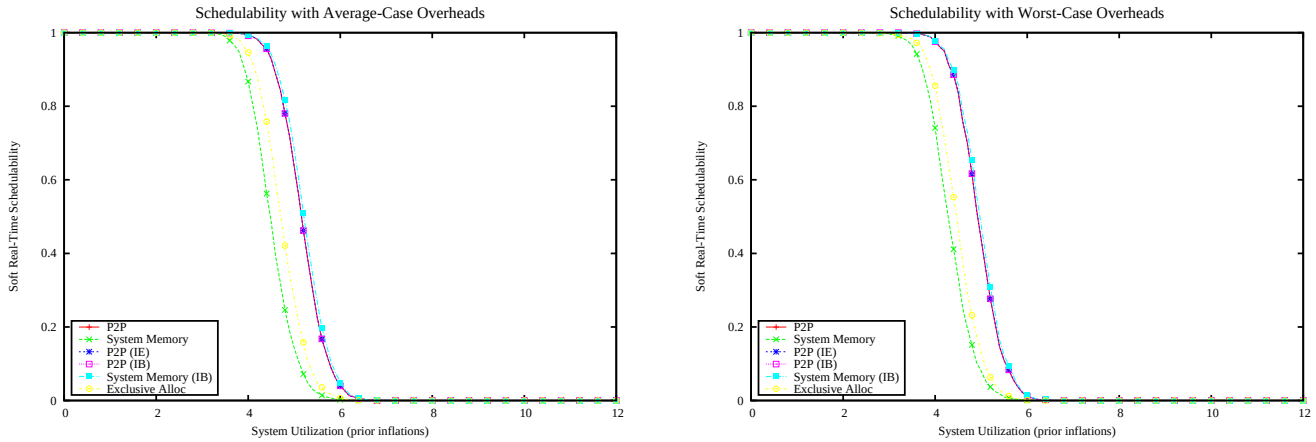

Figure 4415: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

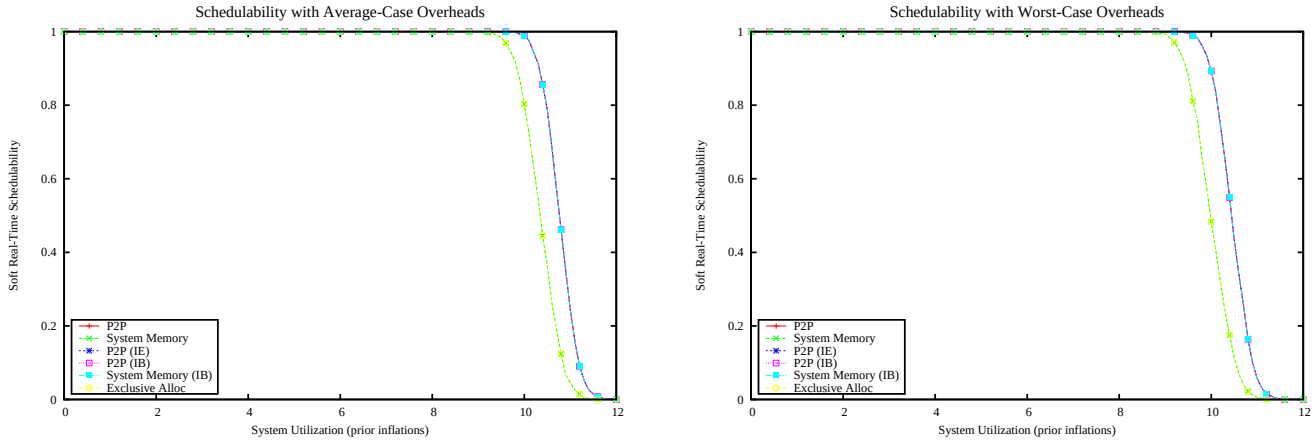

Figure 4416: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

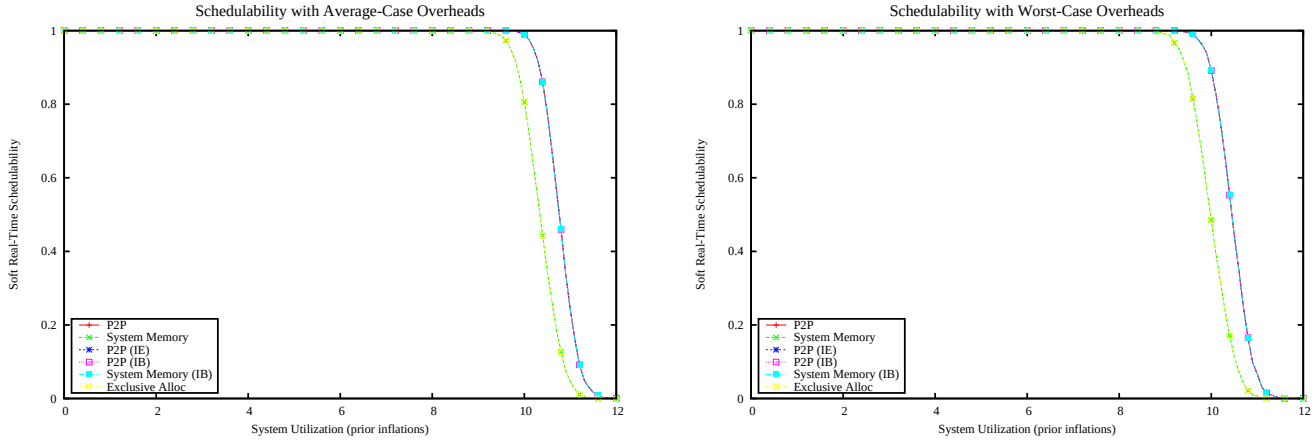

Figure 4417: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

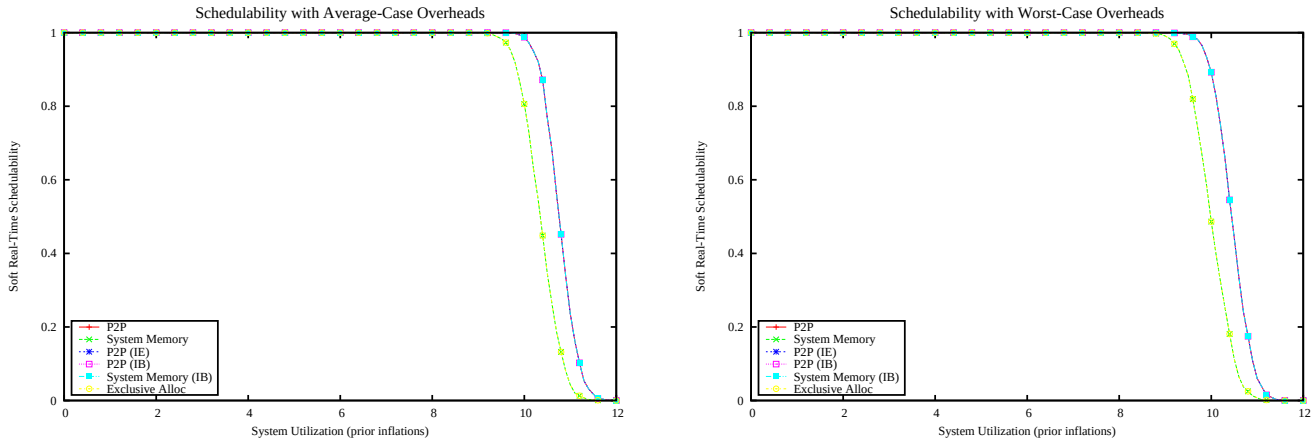

Figure 4418: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

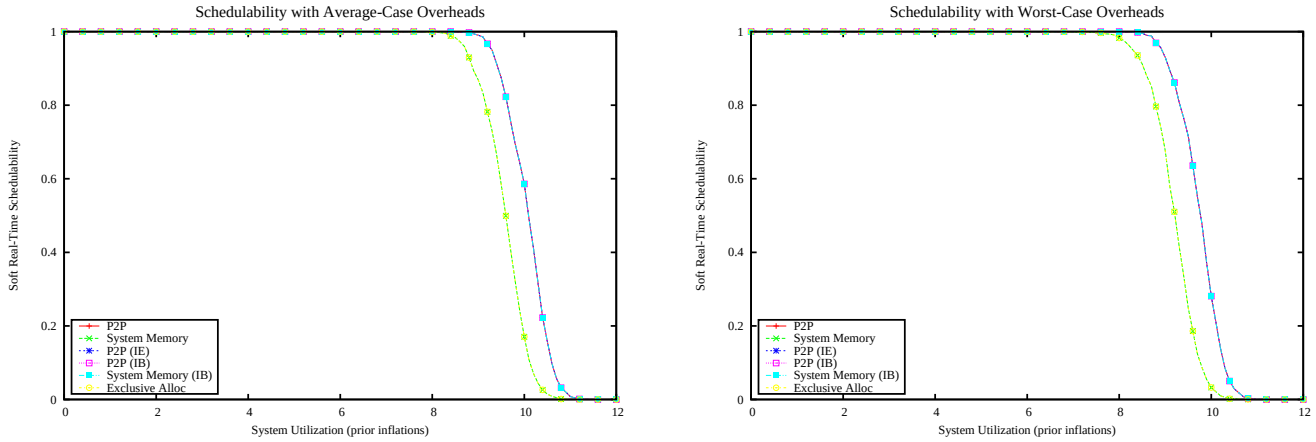

Figure 4419: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

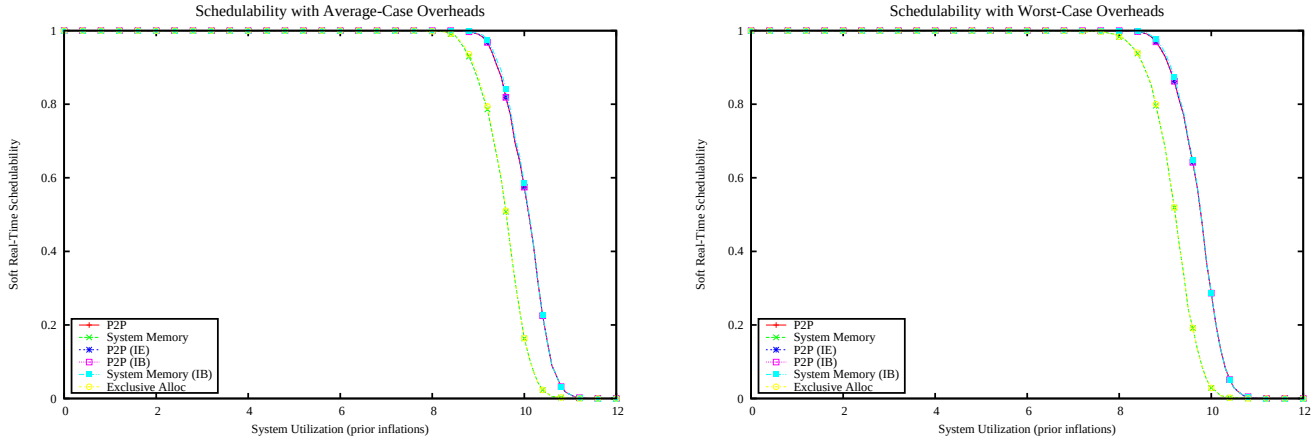

Figure 4420: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

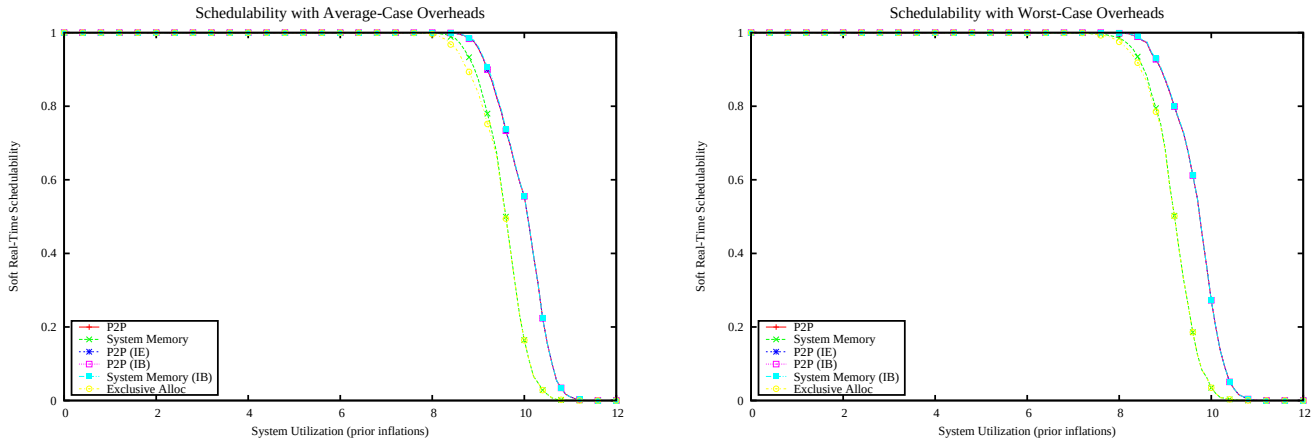

Figure 4421: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

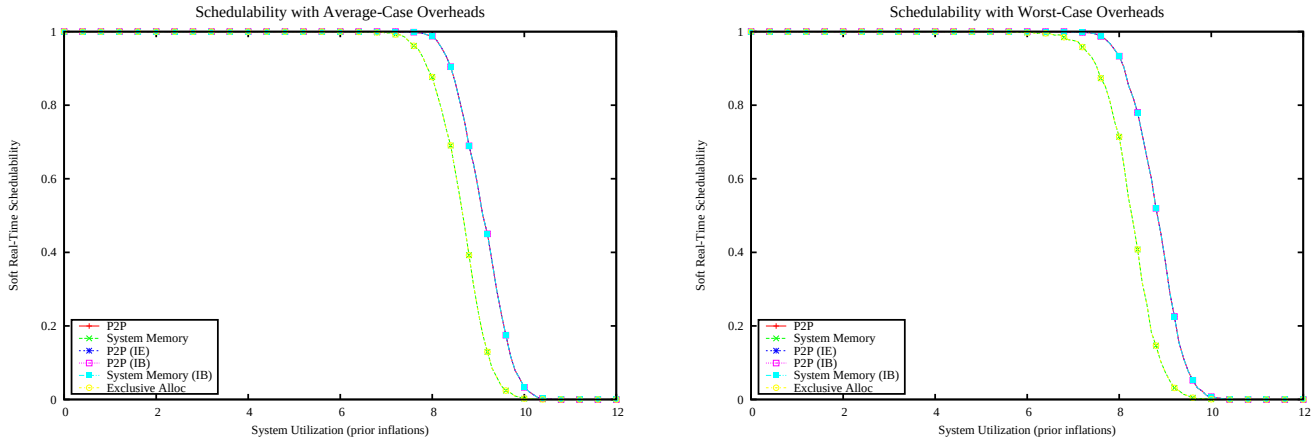

Figure 4422: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

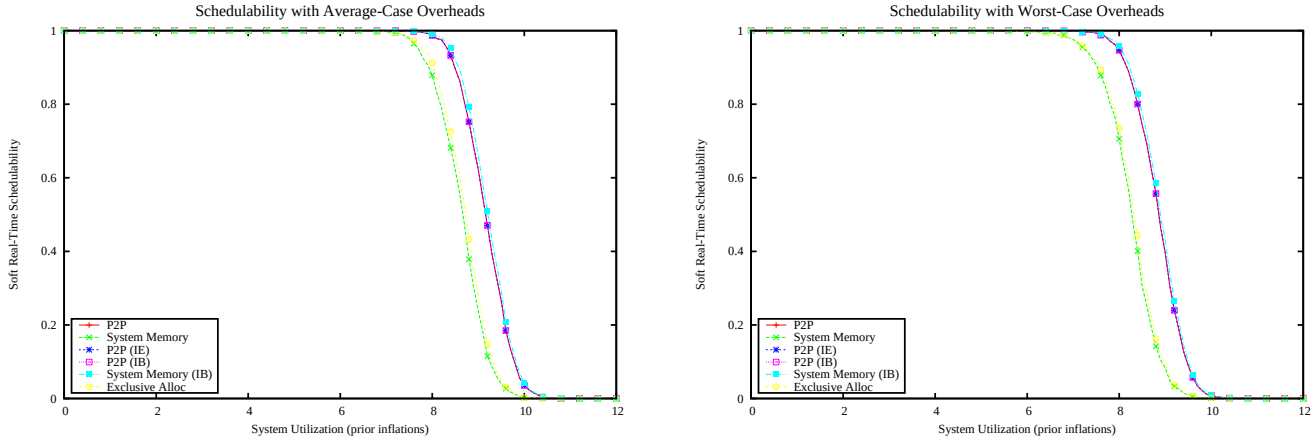

Figure 4423: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

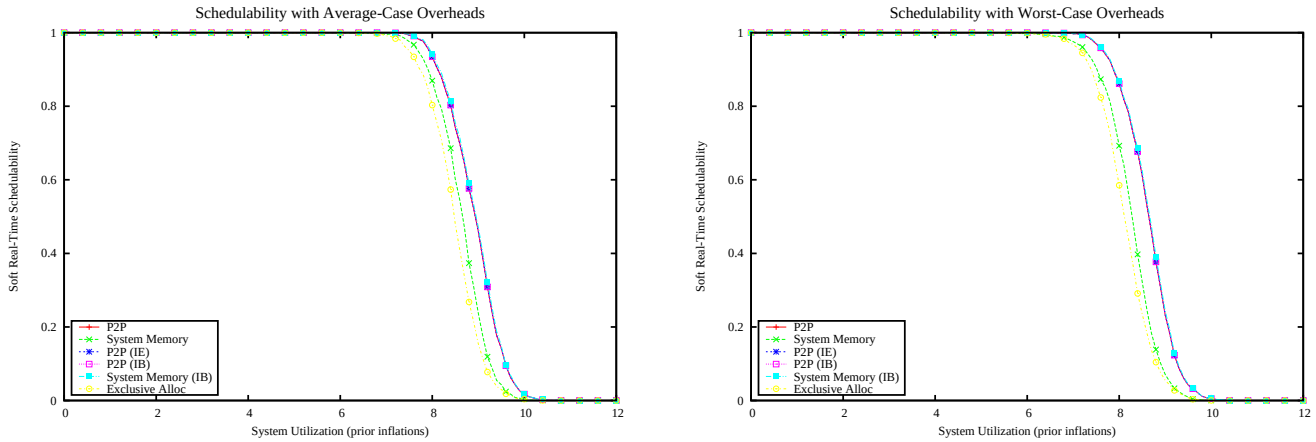

Figure 4424: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

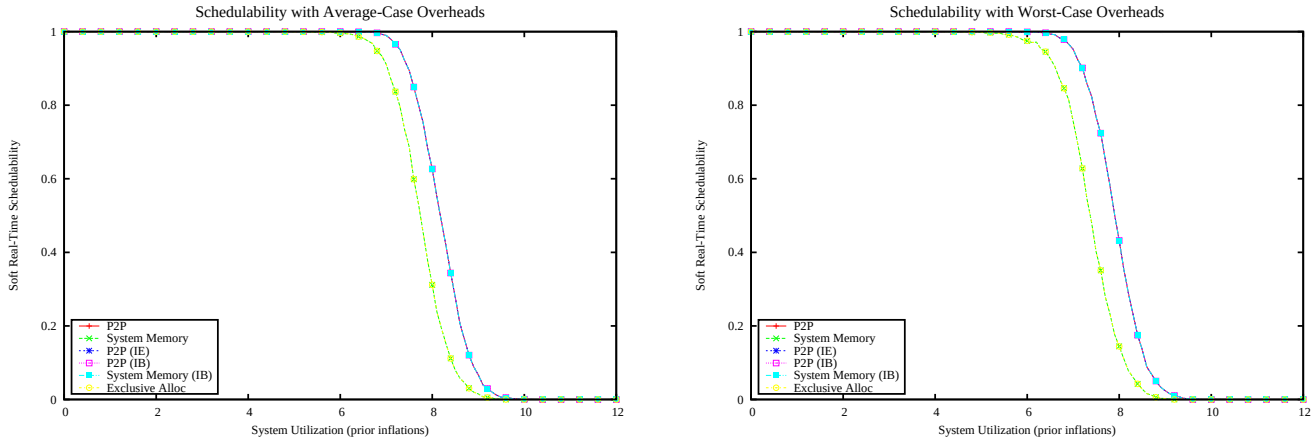

Figure 4425: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

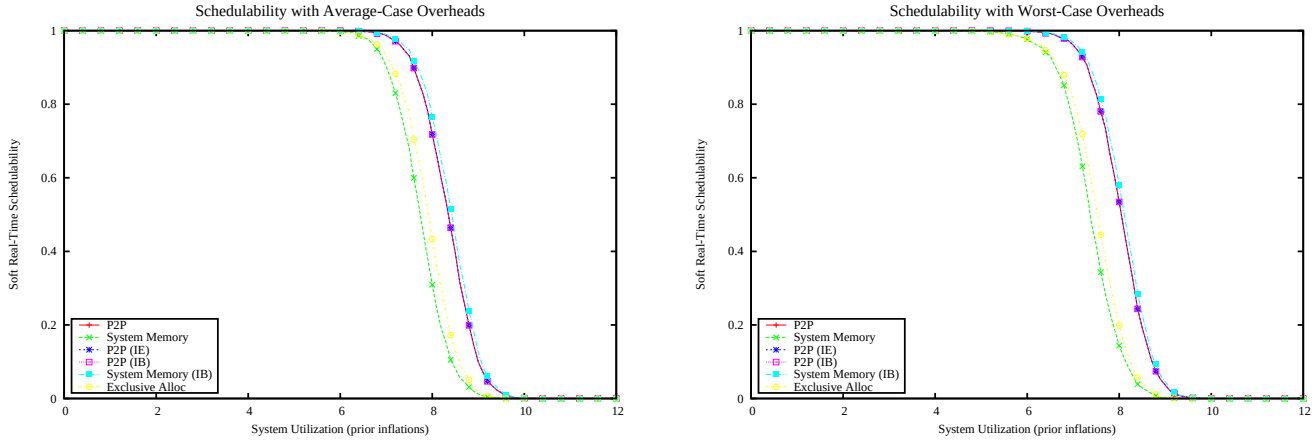

Figure 4426: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

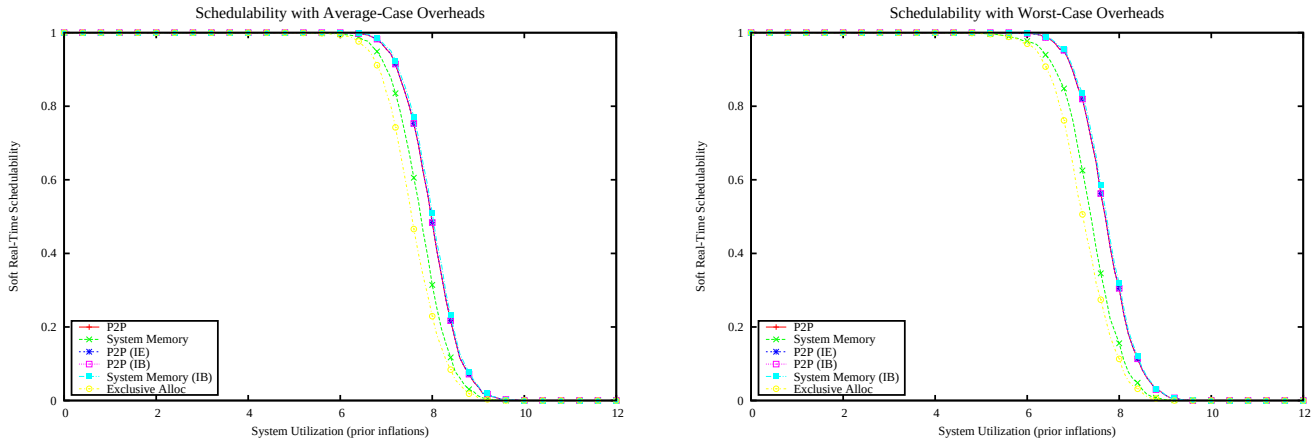

Figure 4427: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

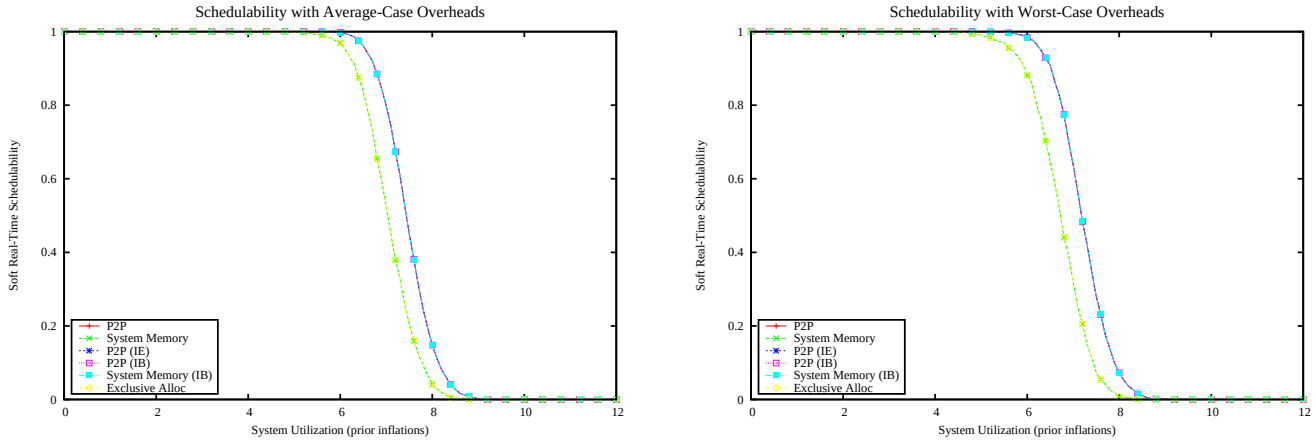

Figure 4428: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

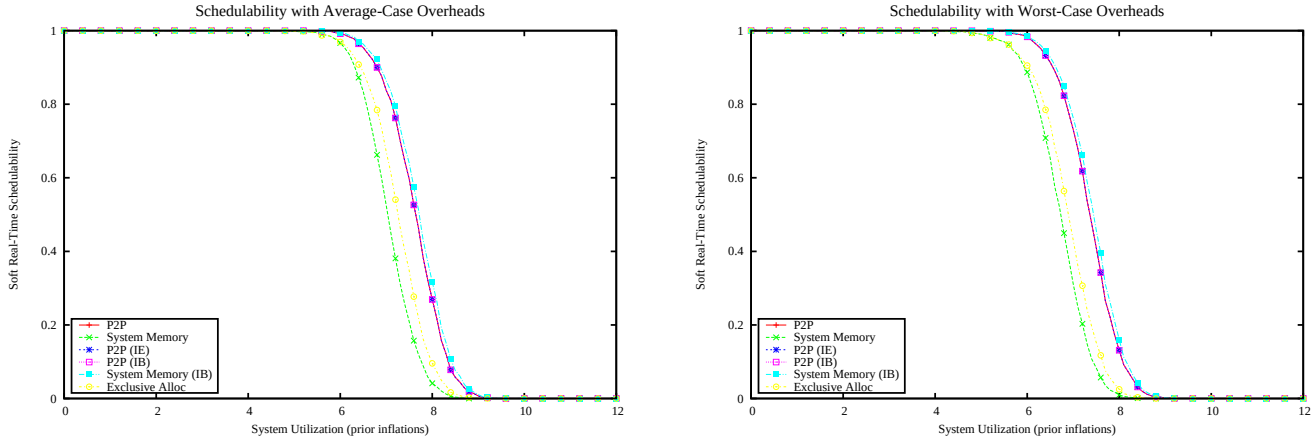

Figure 4429: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

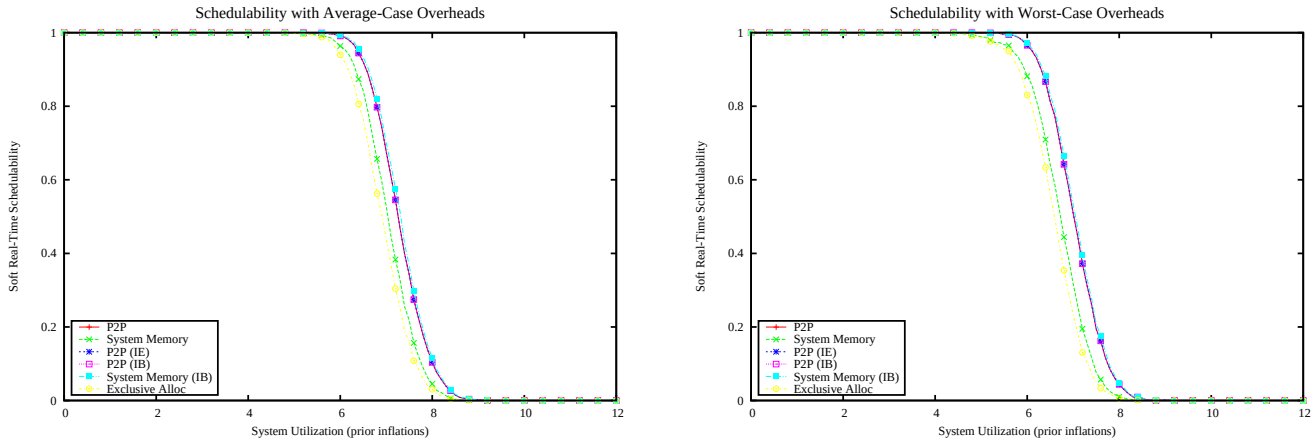

Figure 4430: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

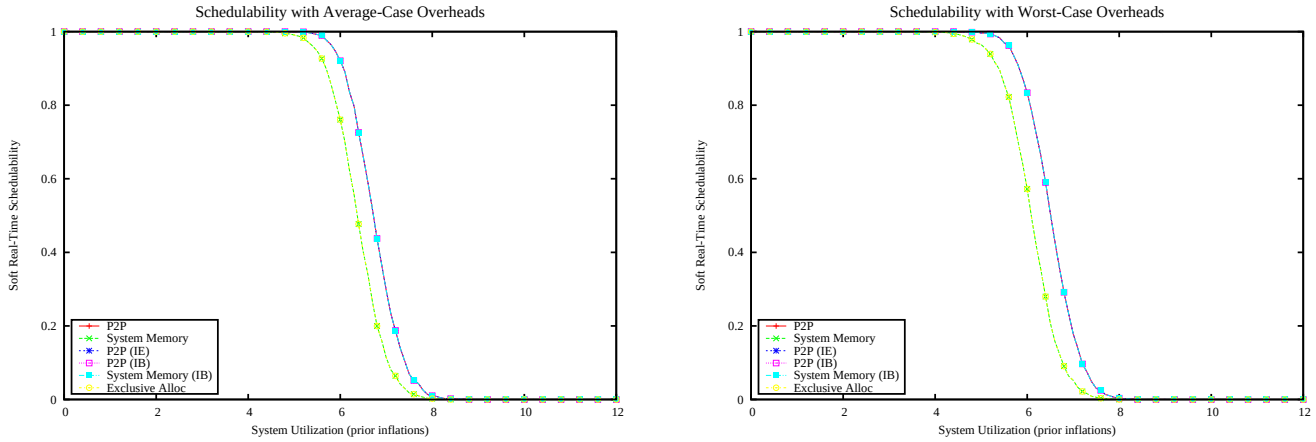

Figure 4431: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

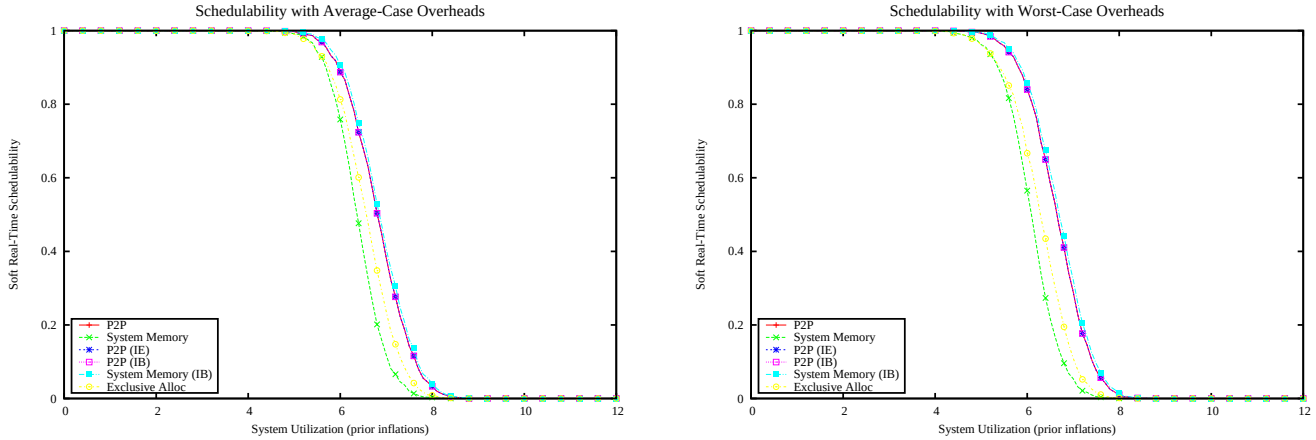

Figure 4432: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

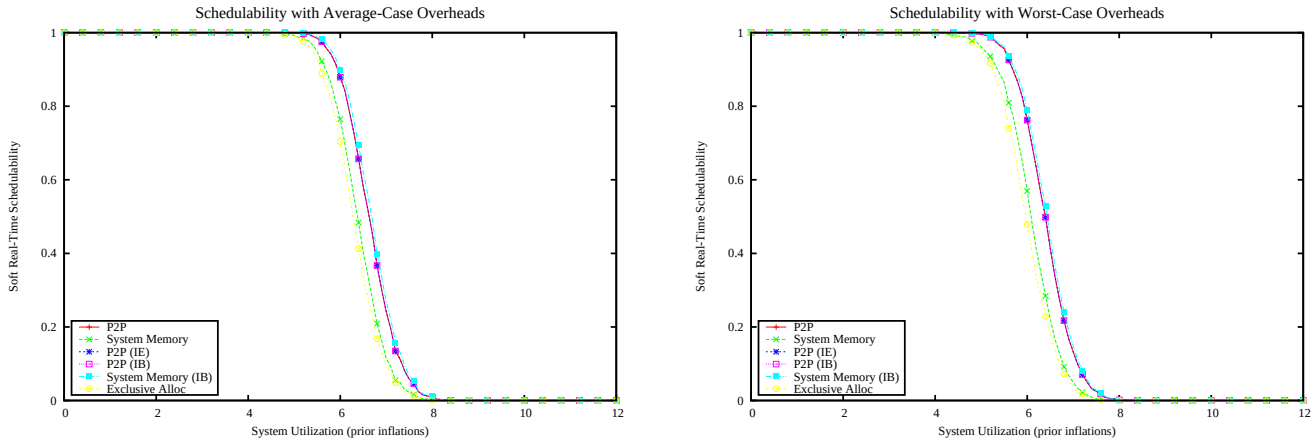

Figure 4433: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

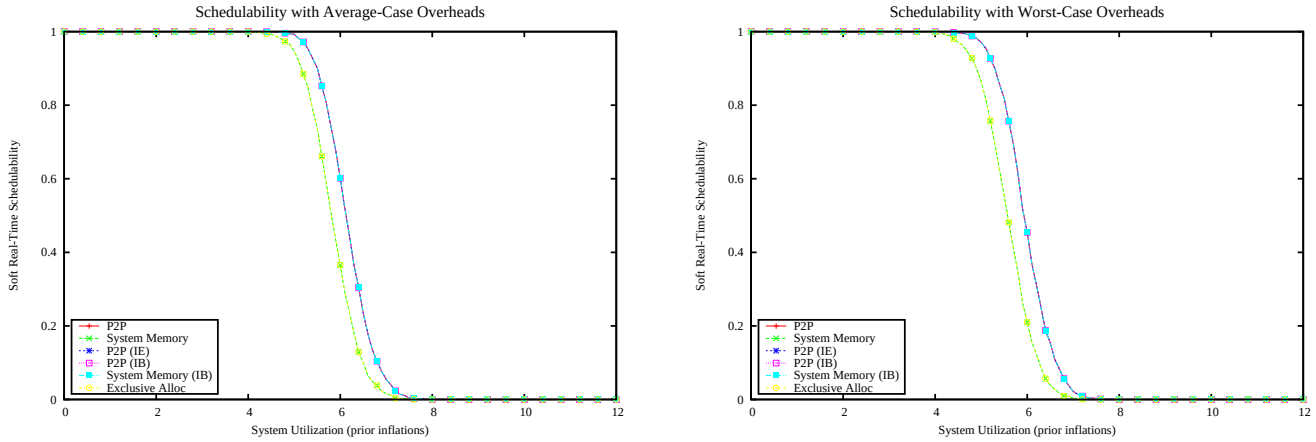

Figure 4434: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

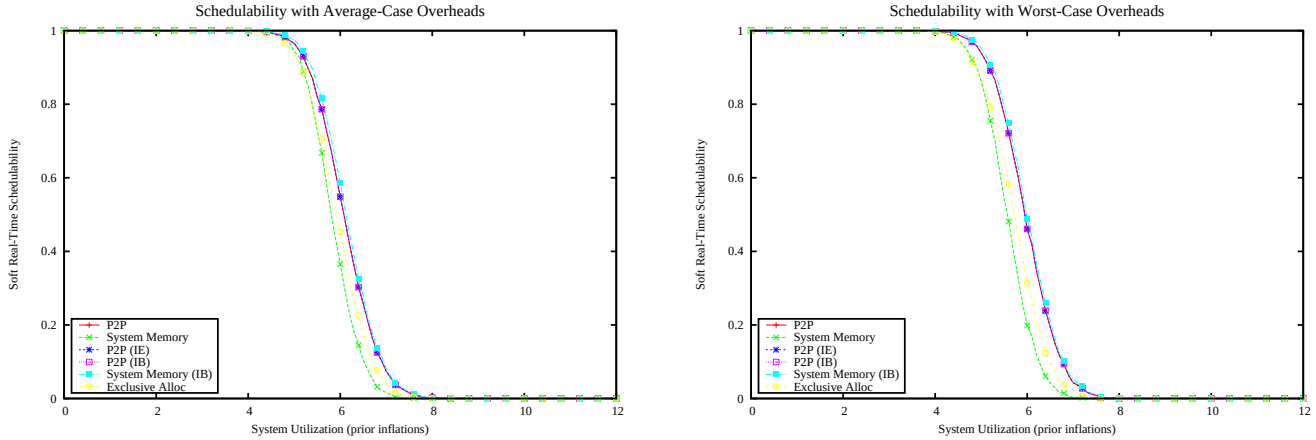

Figure 4435: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

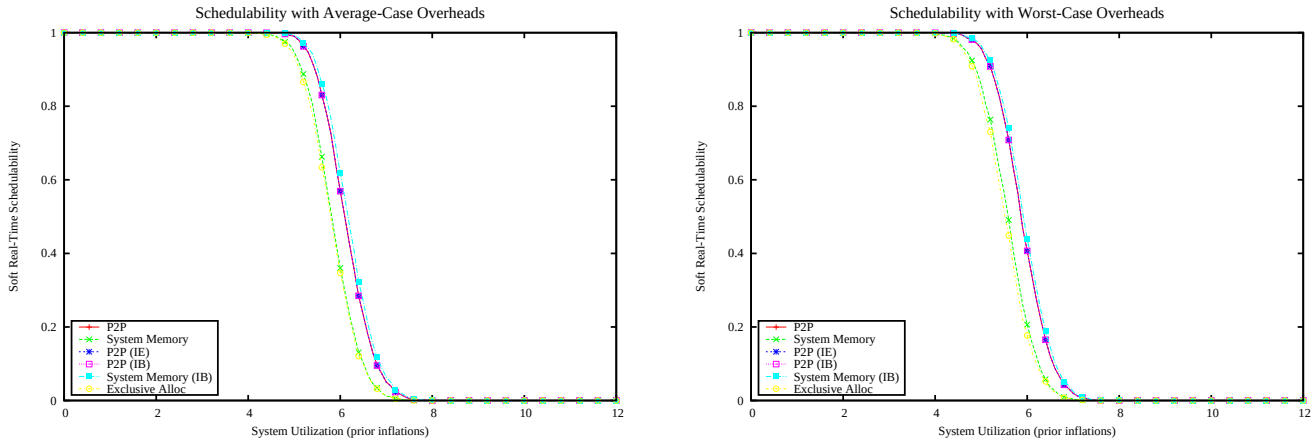

Figure 4436: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

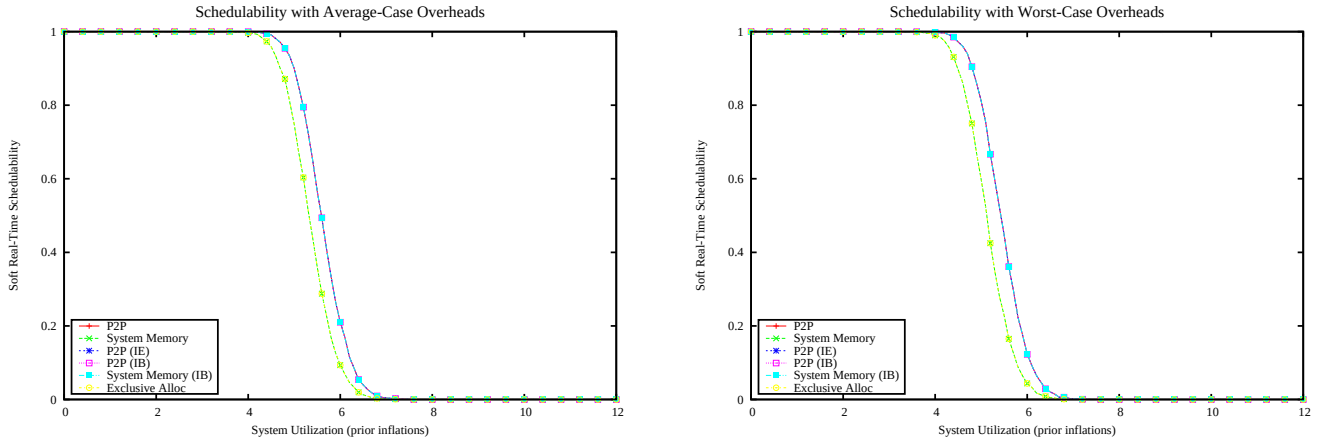

Figure 4437: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

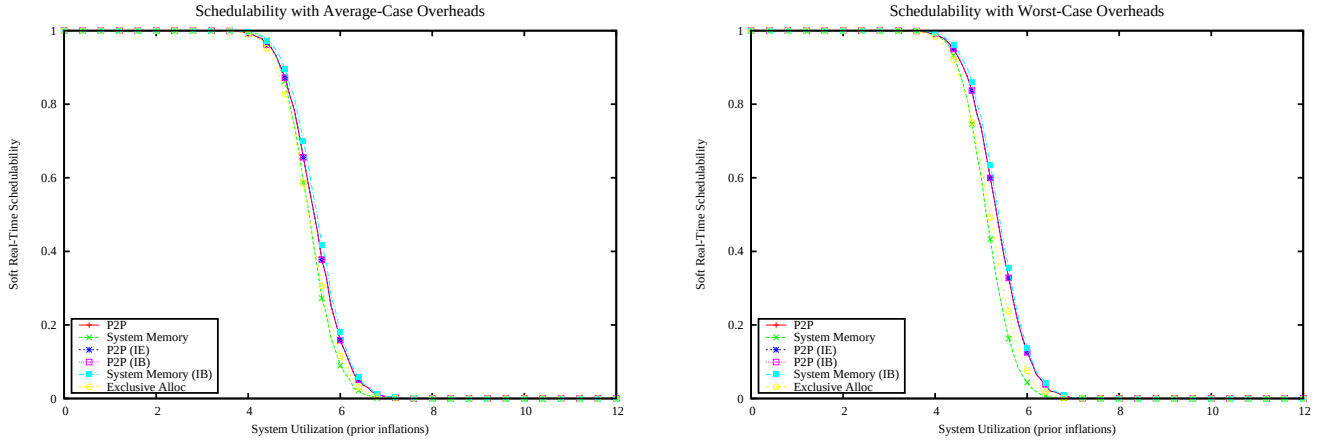

Figure 4438: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

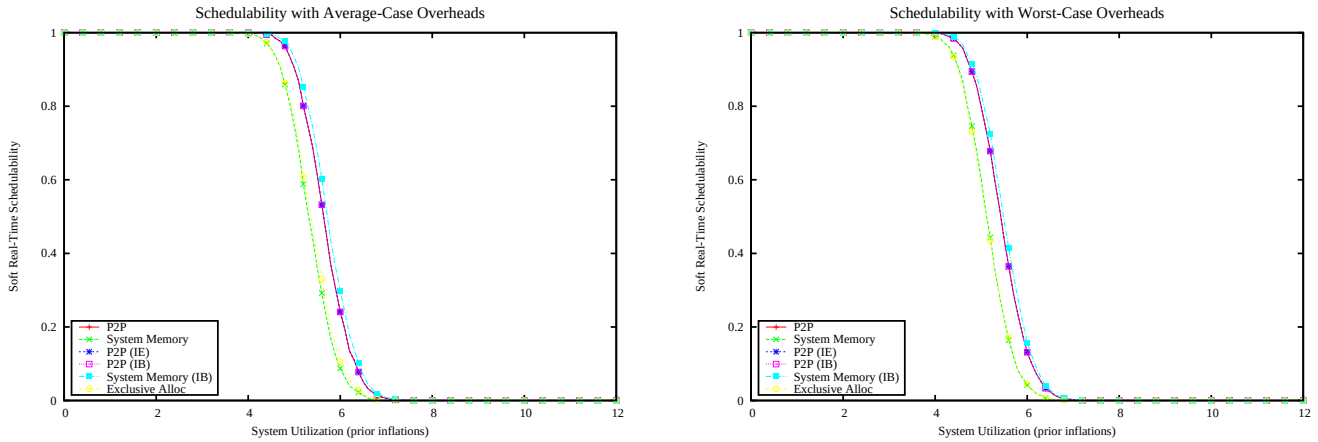

Figure 4439: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

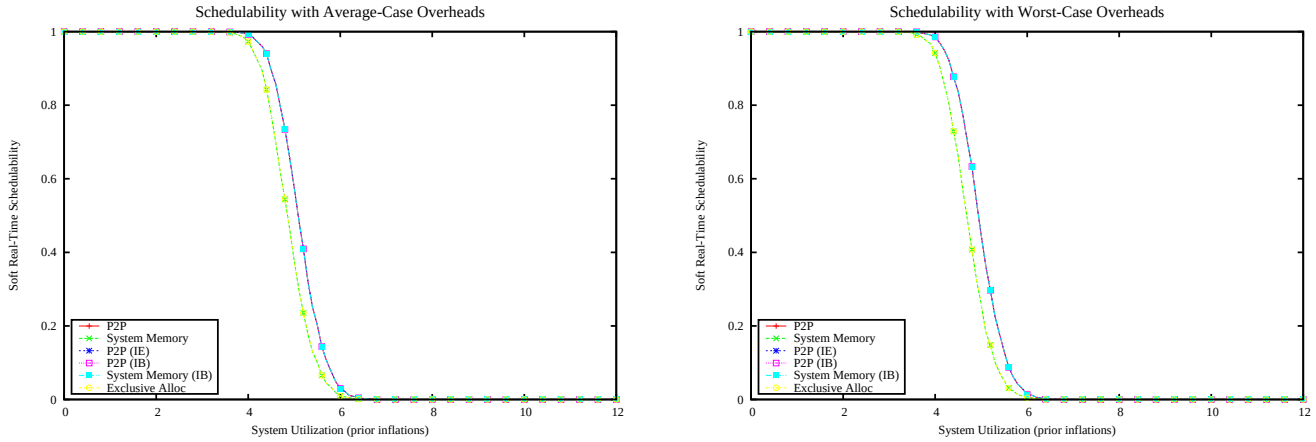

Figure 4440: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

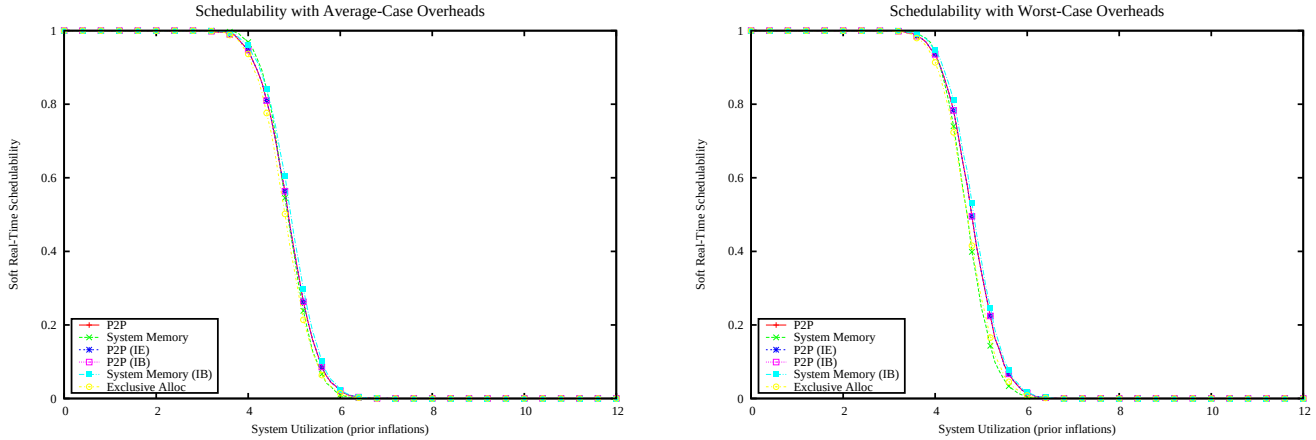

Figure 4441: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

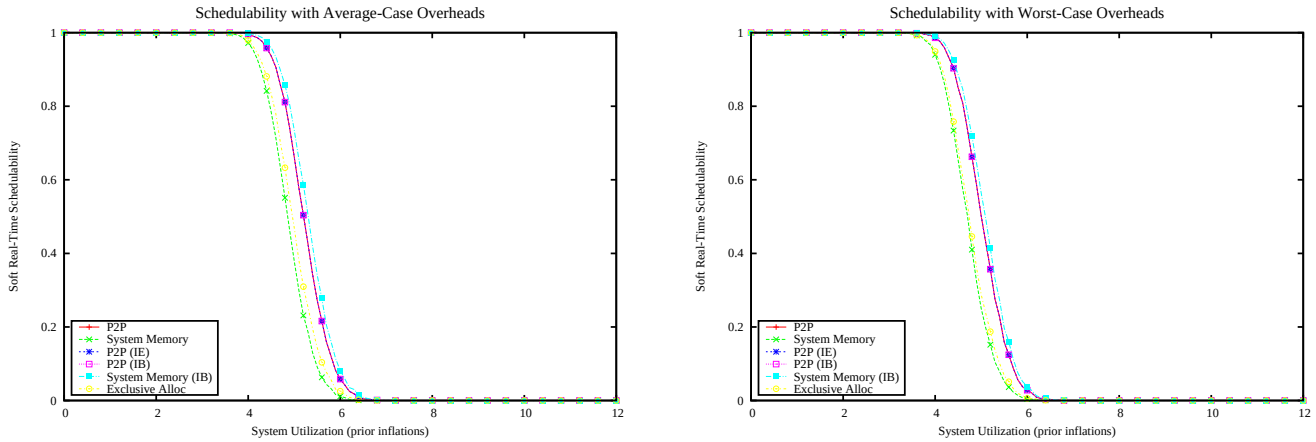

Figure 4442: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

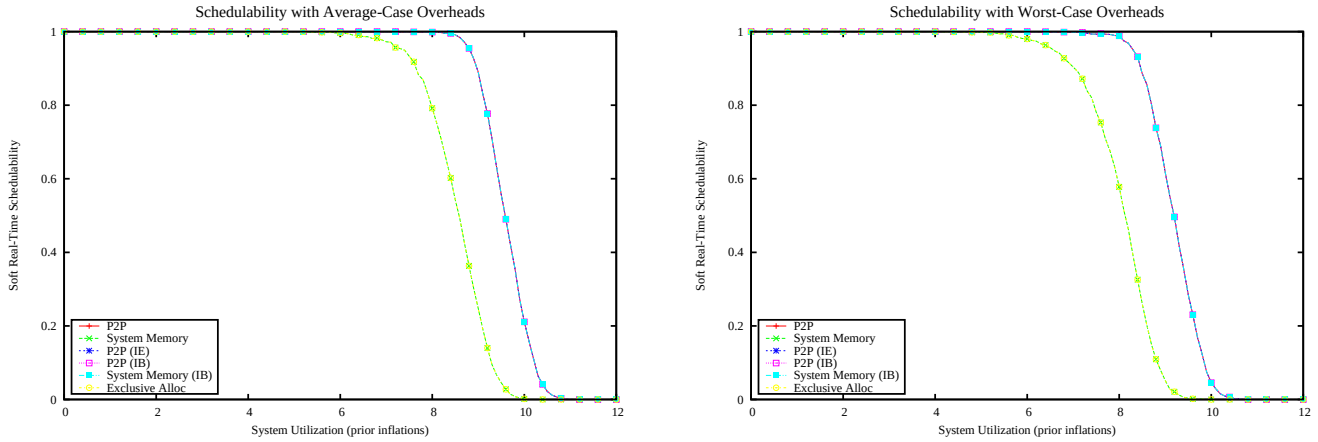

Figure 4443: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

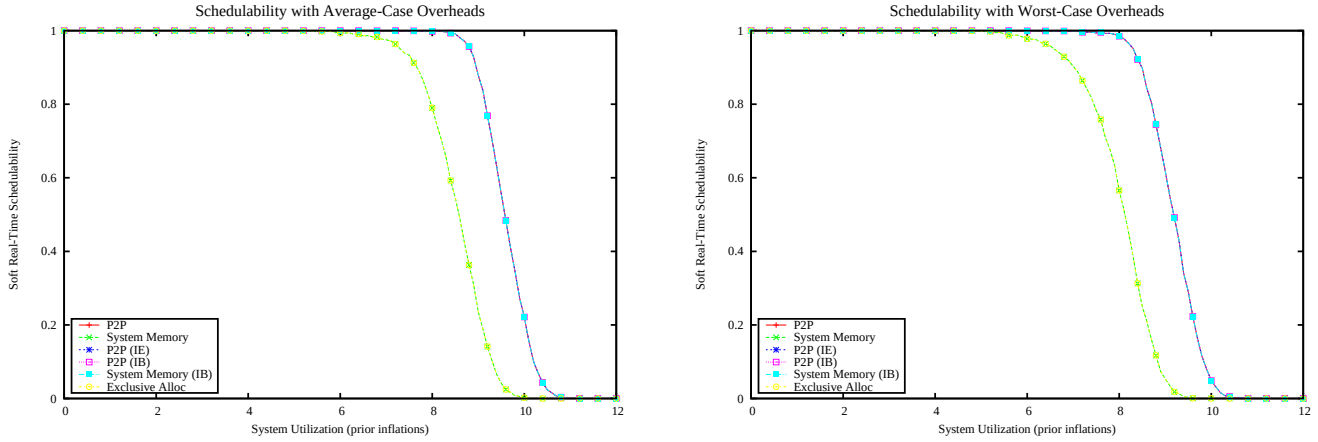

Figure 4444: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

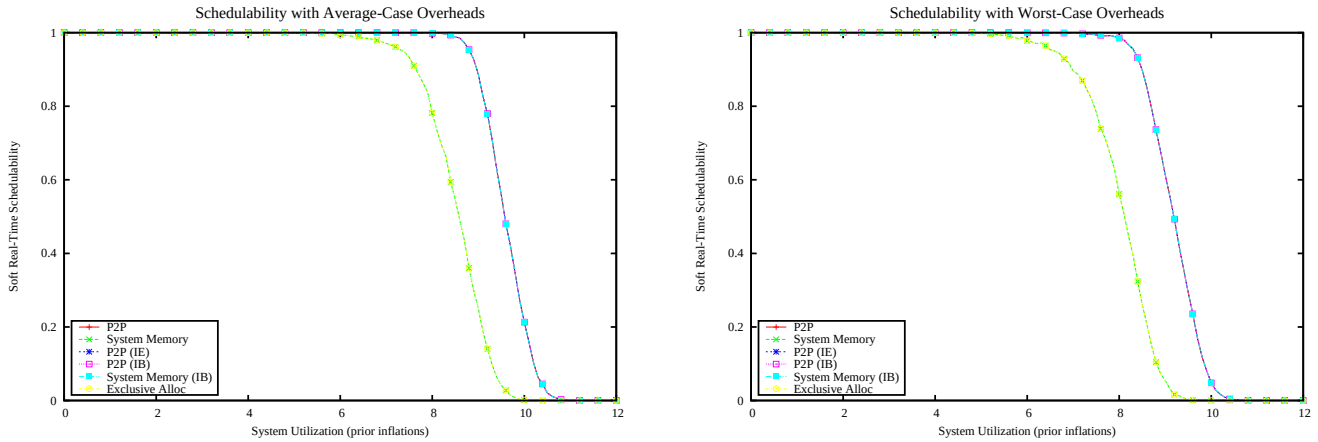

Figure 4445: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

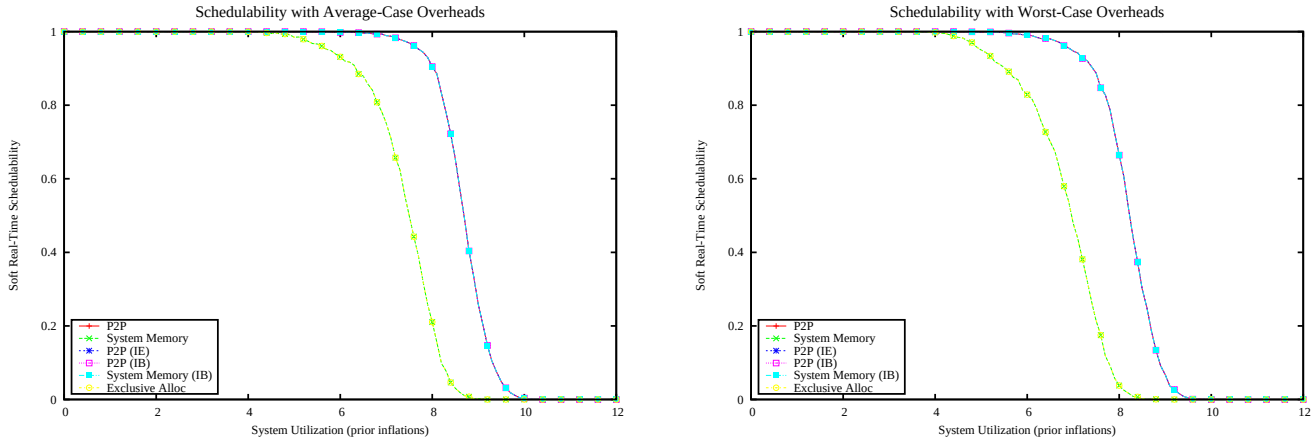

Figure 4446: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

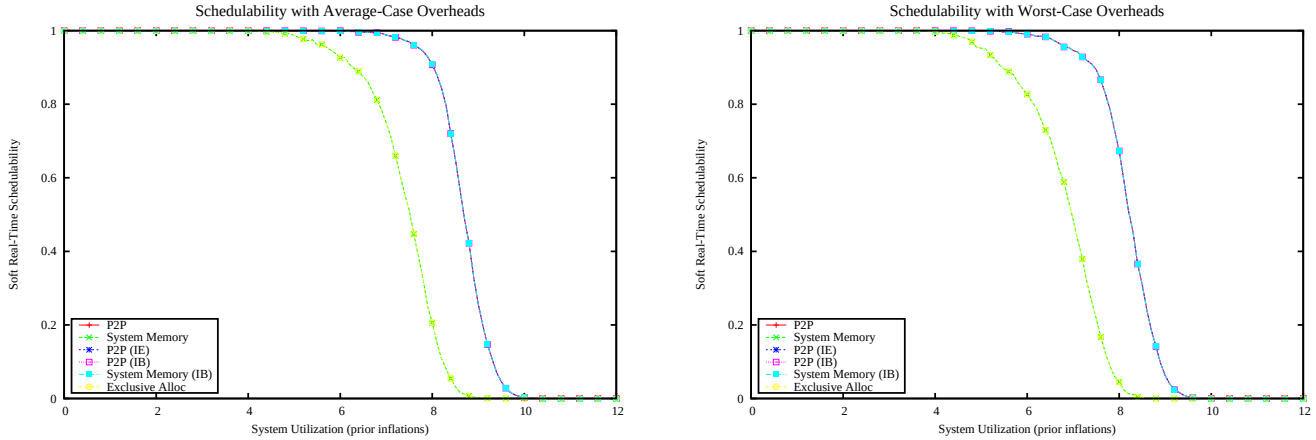

Figure 4447: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

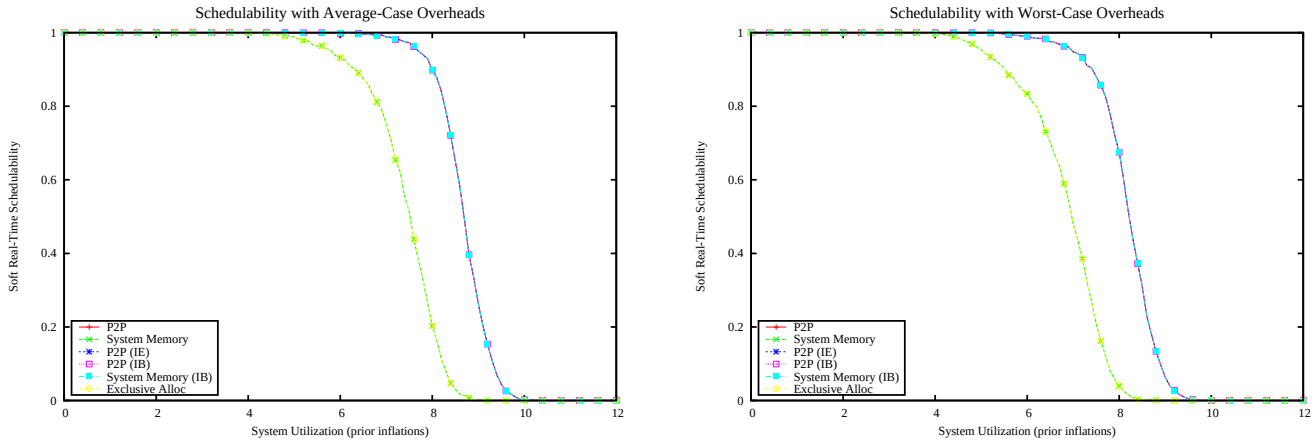

Figure 4448: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

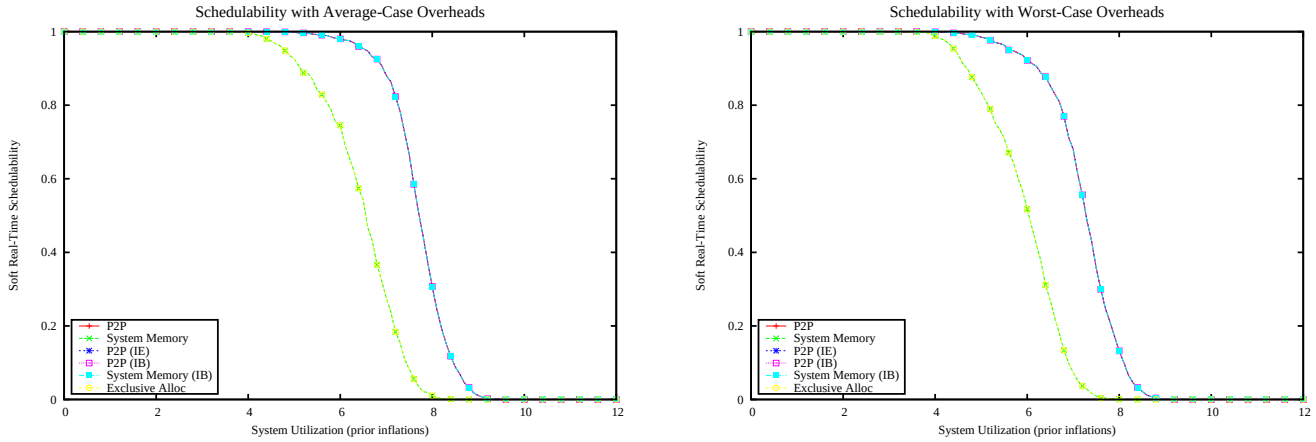

Figure 4449: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

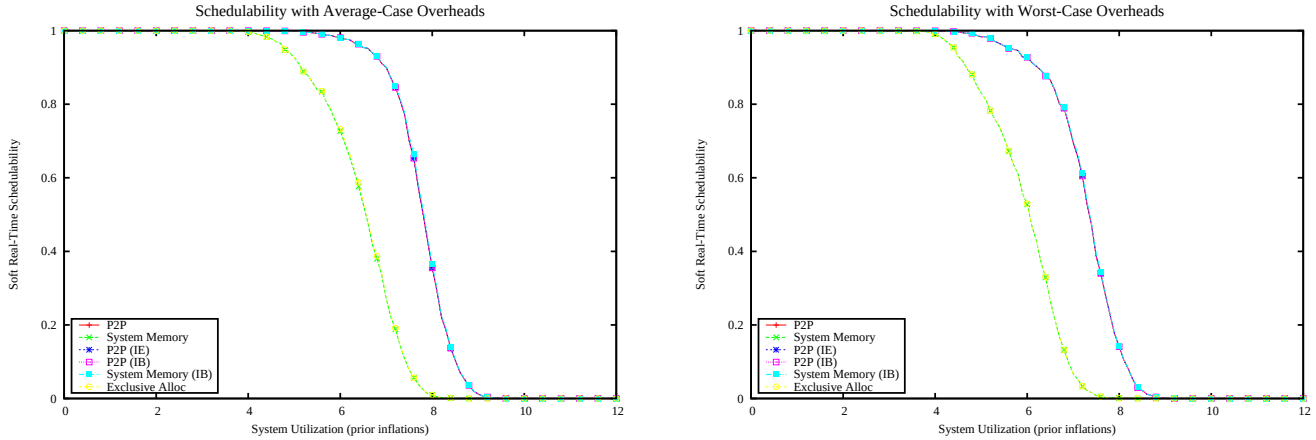

Figure 4450: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

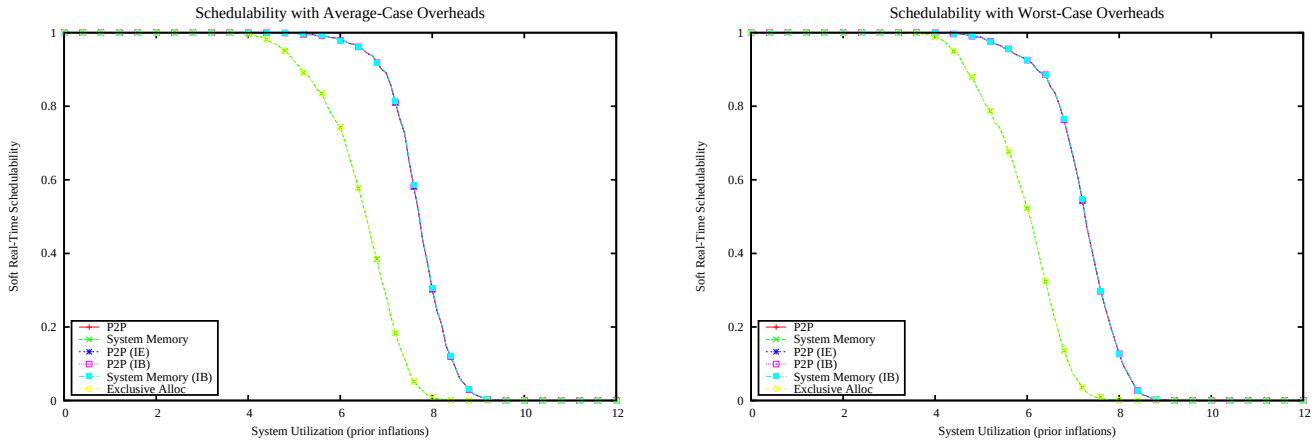

Figure 4451: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

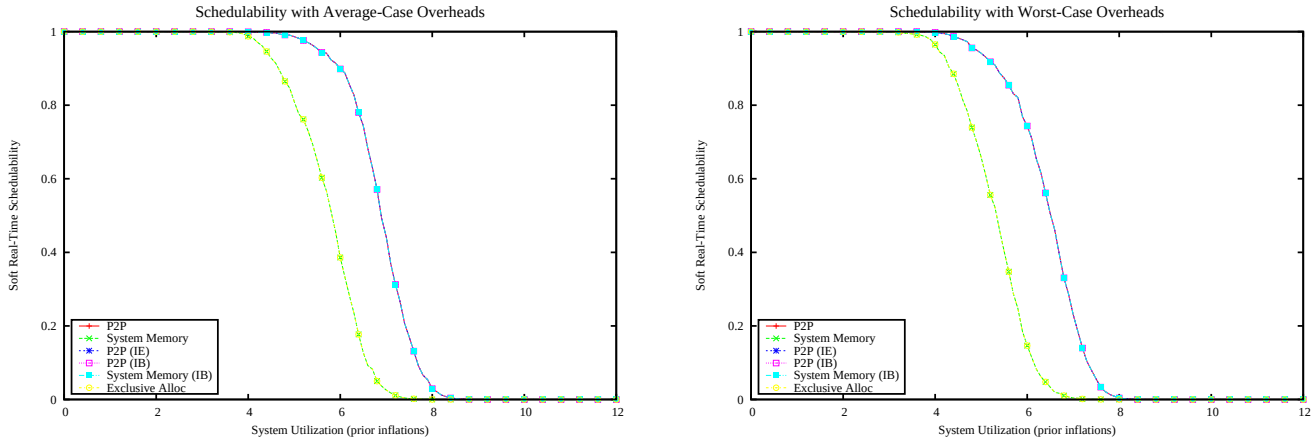

Figure 4452: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

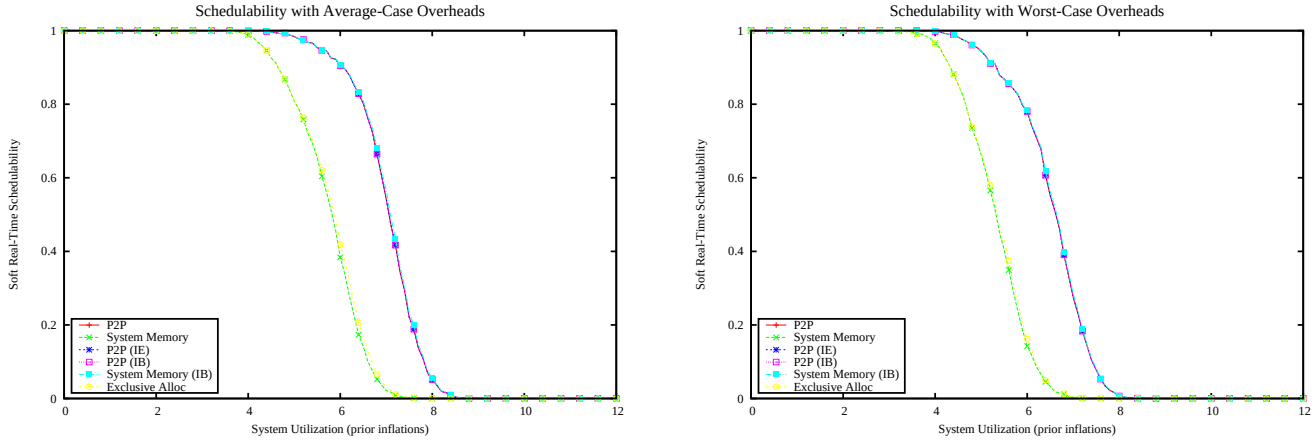

Figure 4453: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

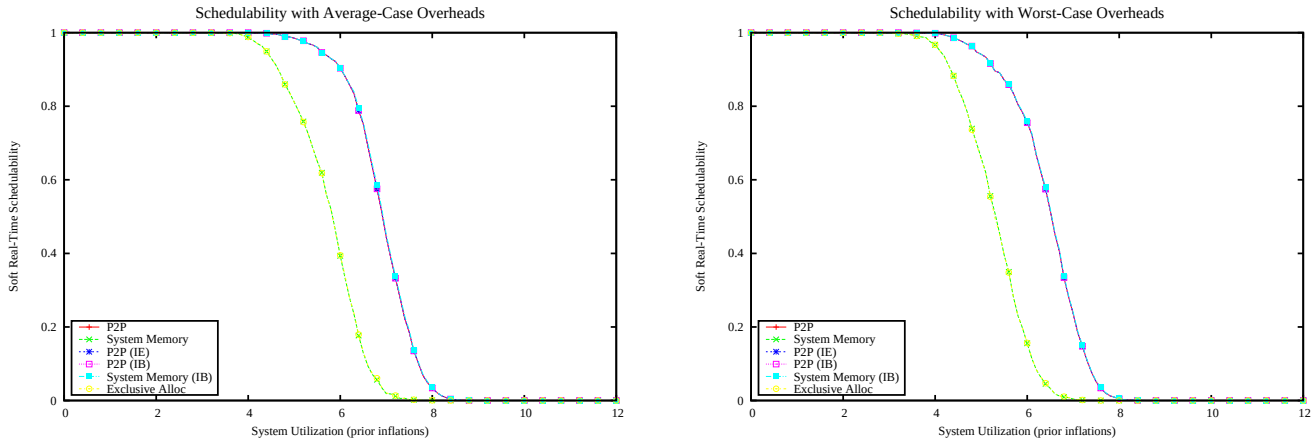

Figure 4454: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

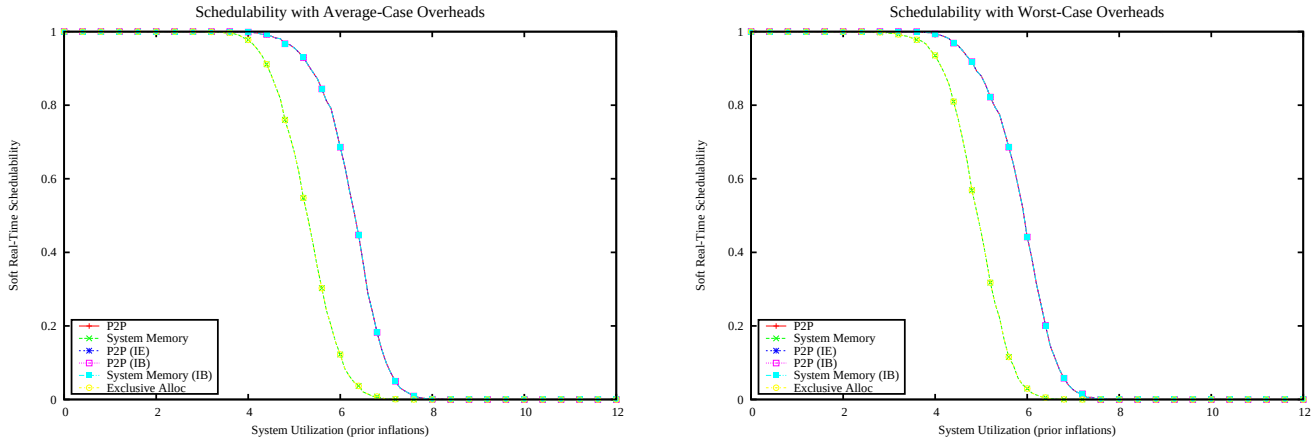

Figure 4455: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

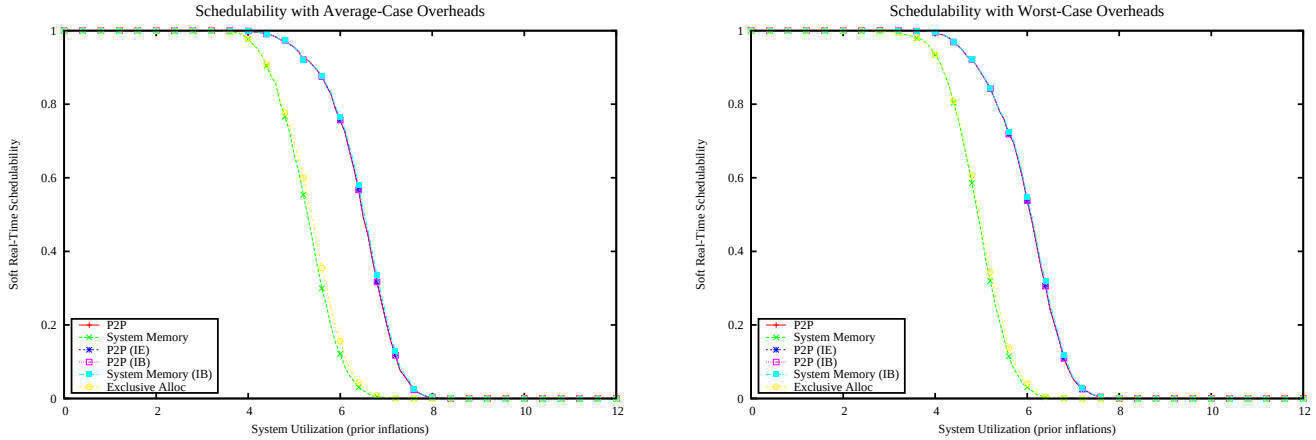

Figure 4456: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

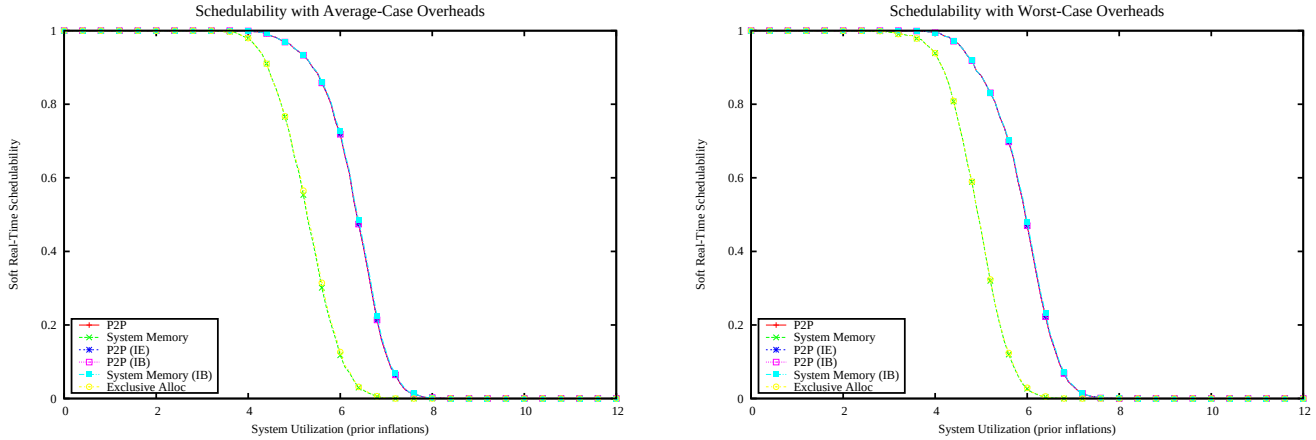

Figure 4457: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

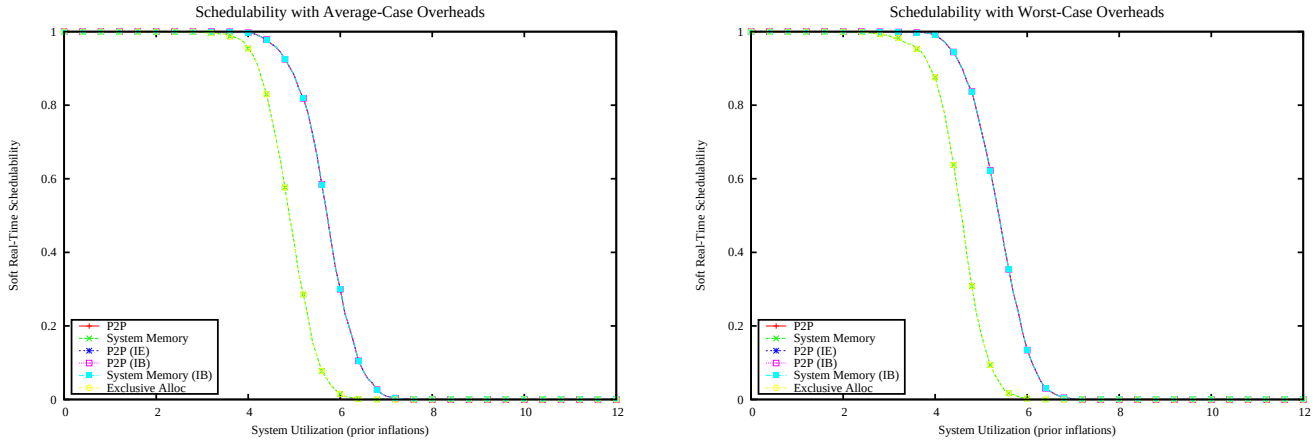

Figure 4458: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

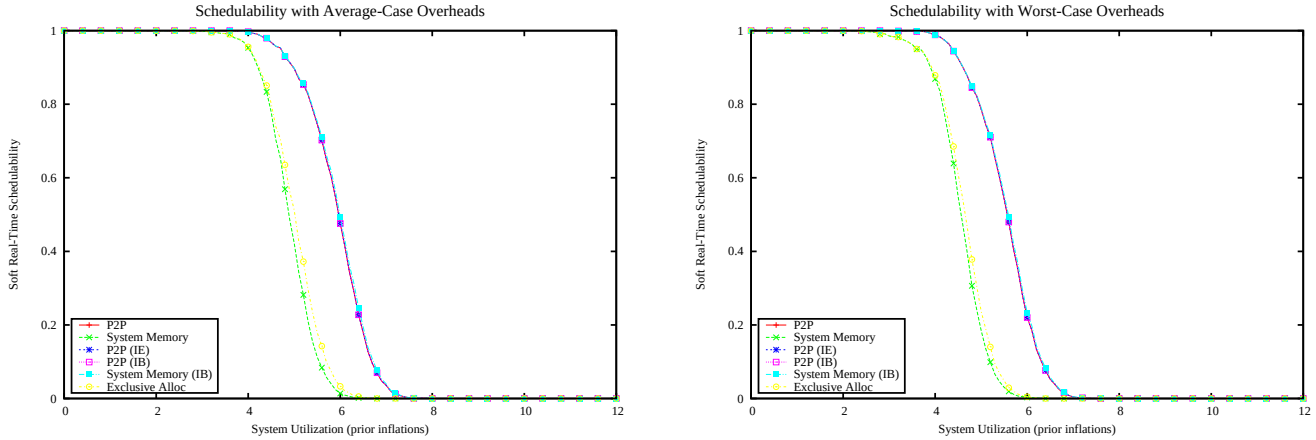

Figure 4459: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

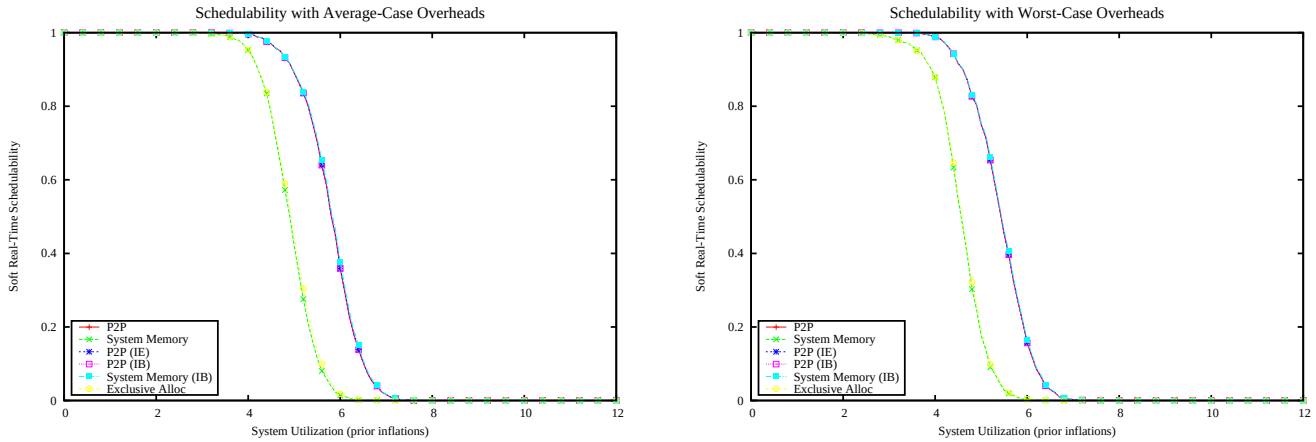

Figure 4460: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

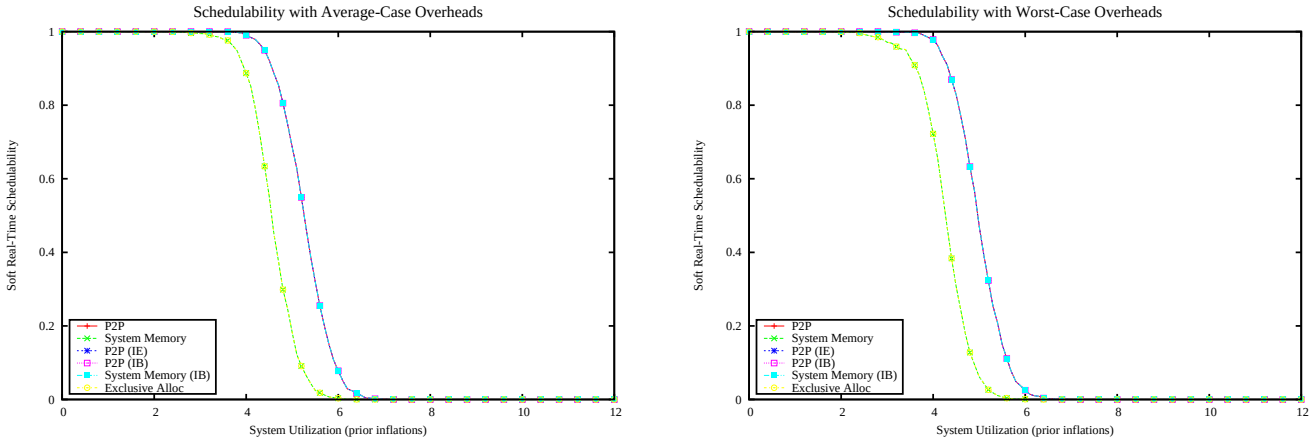

Figure 4461: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

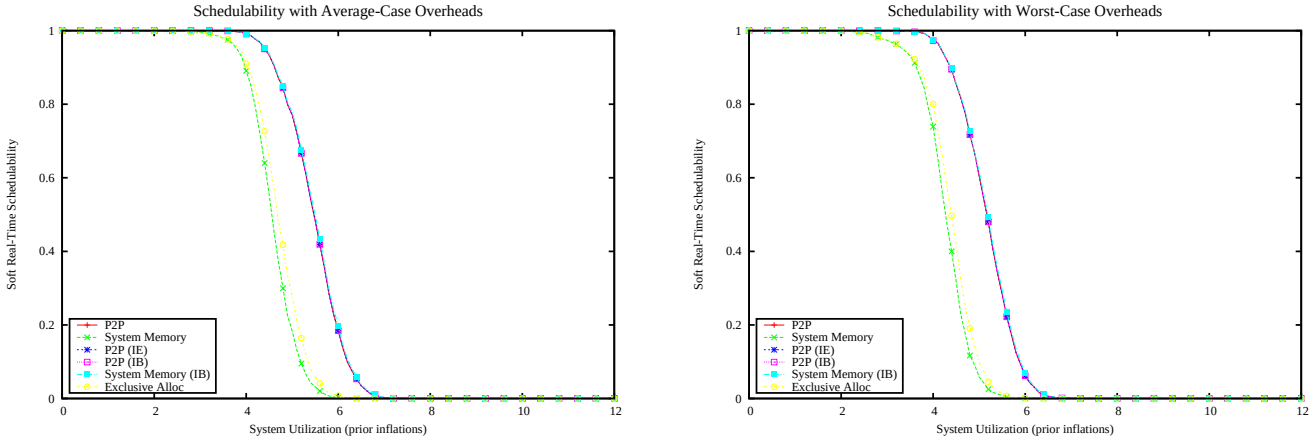

Figure 4462: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

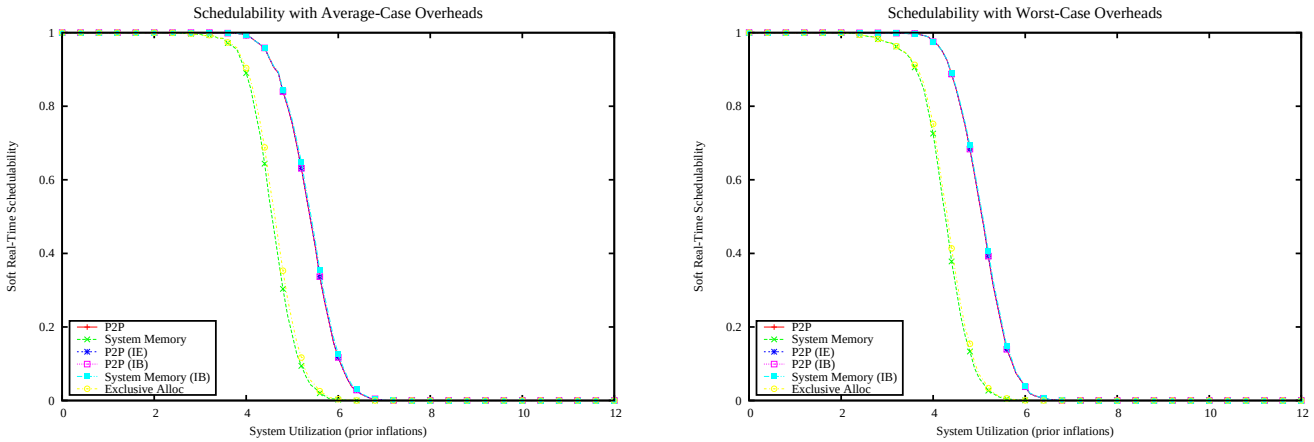

Figure 4463: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

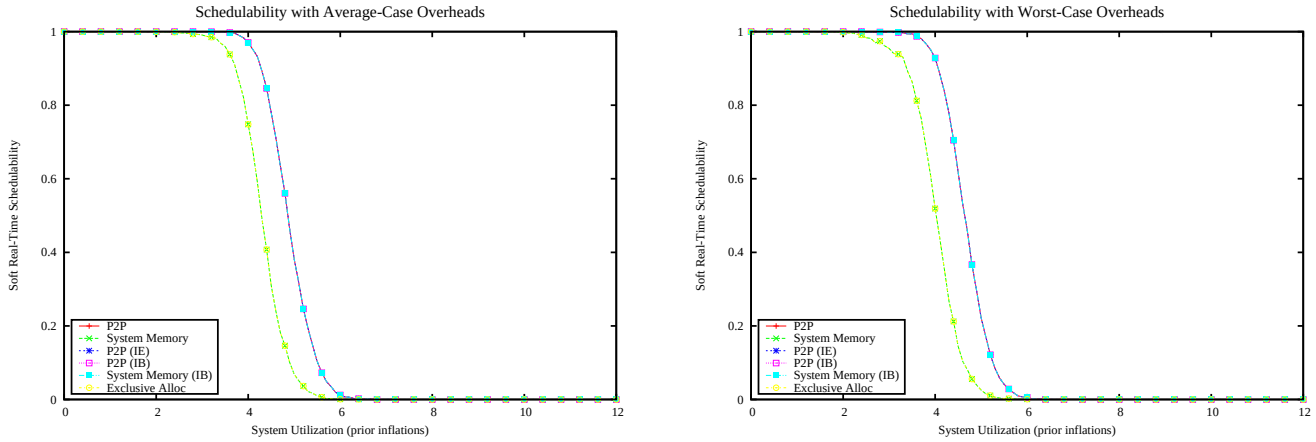

Figure 4464: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

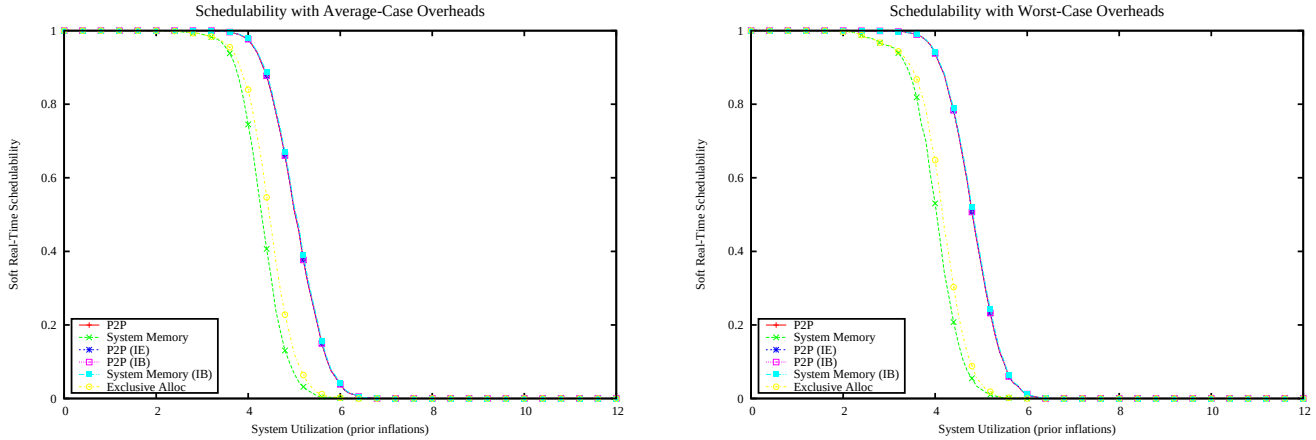

Figure 4465: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

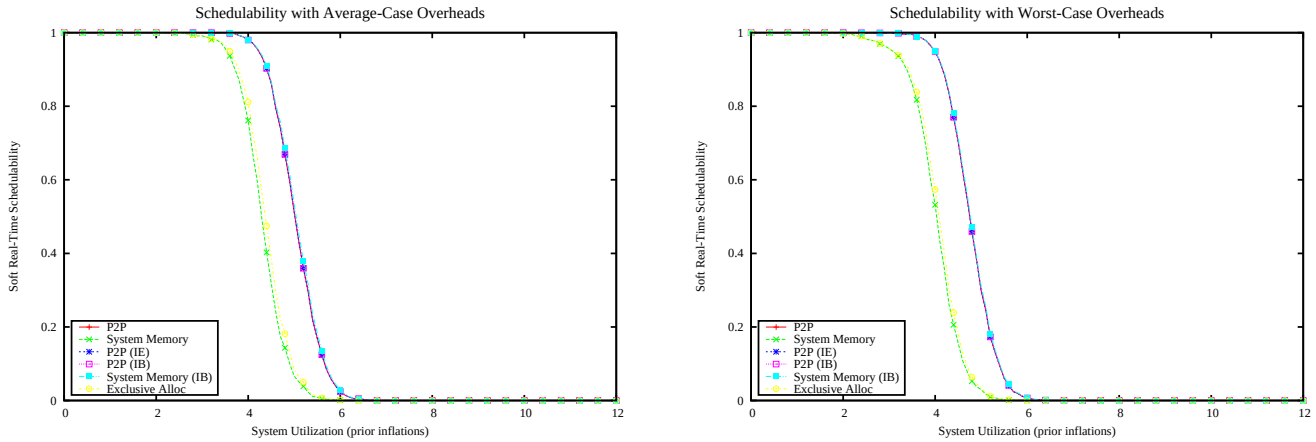

Figure 4466: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

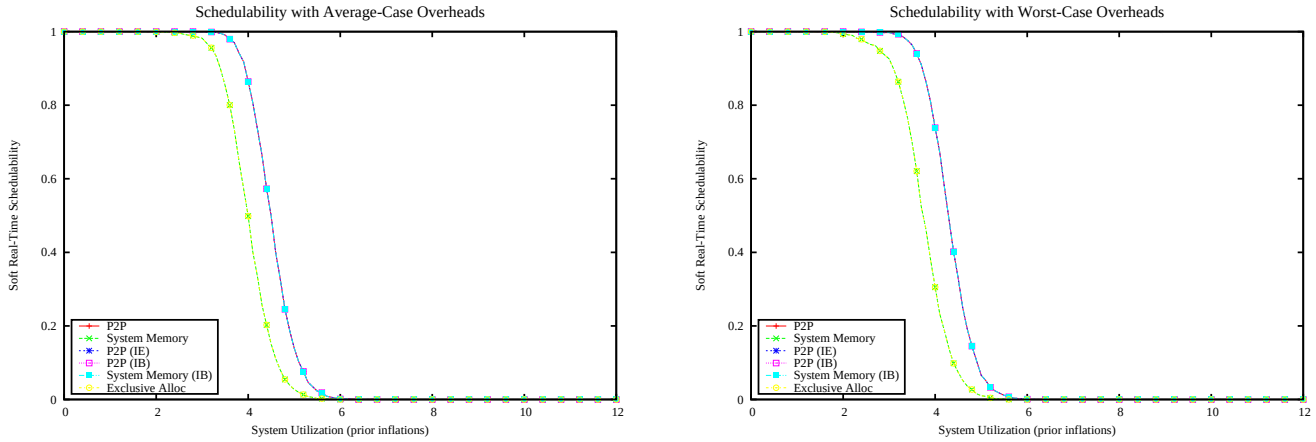

Figure 4467: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

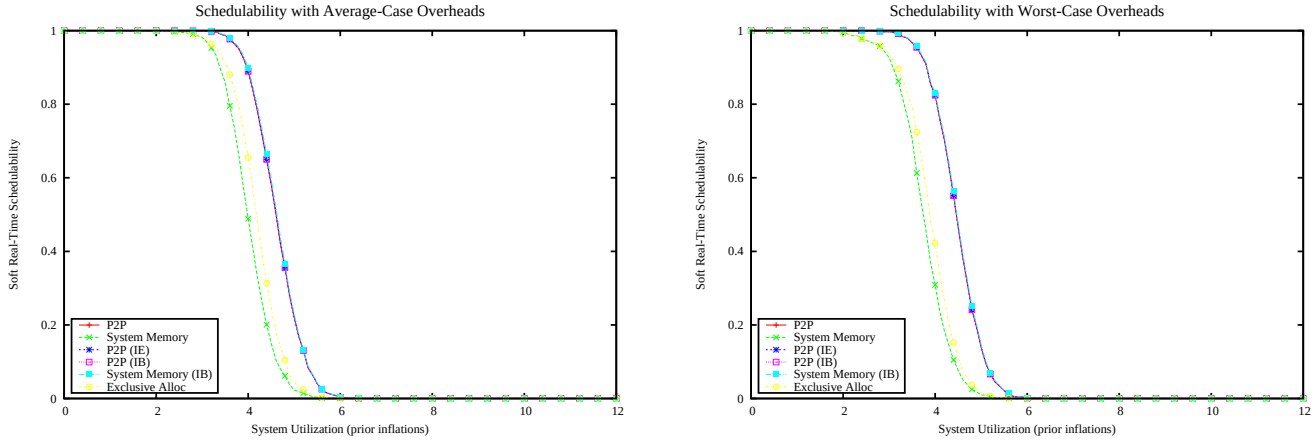

Figure 4468: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

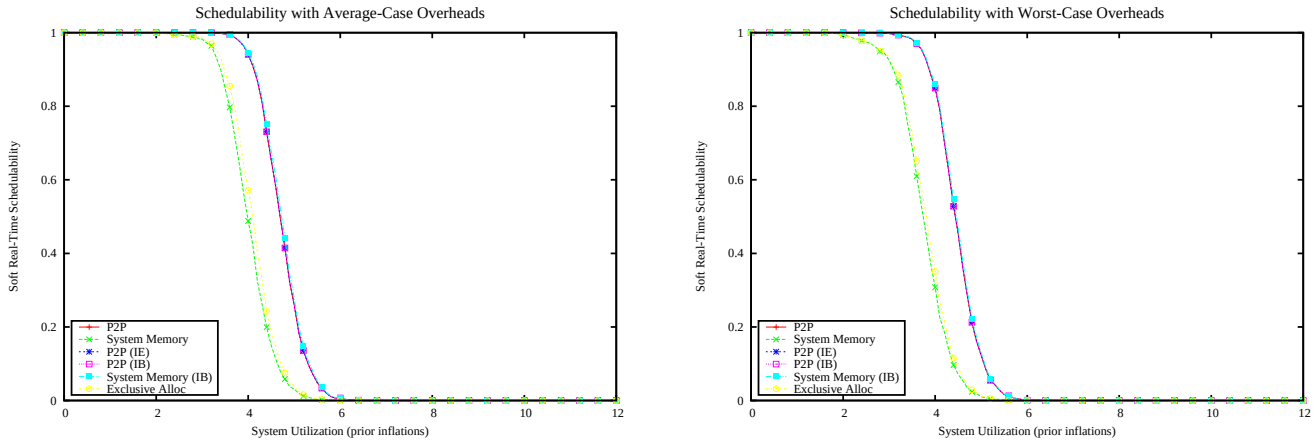

Figure 4469: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

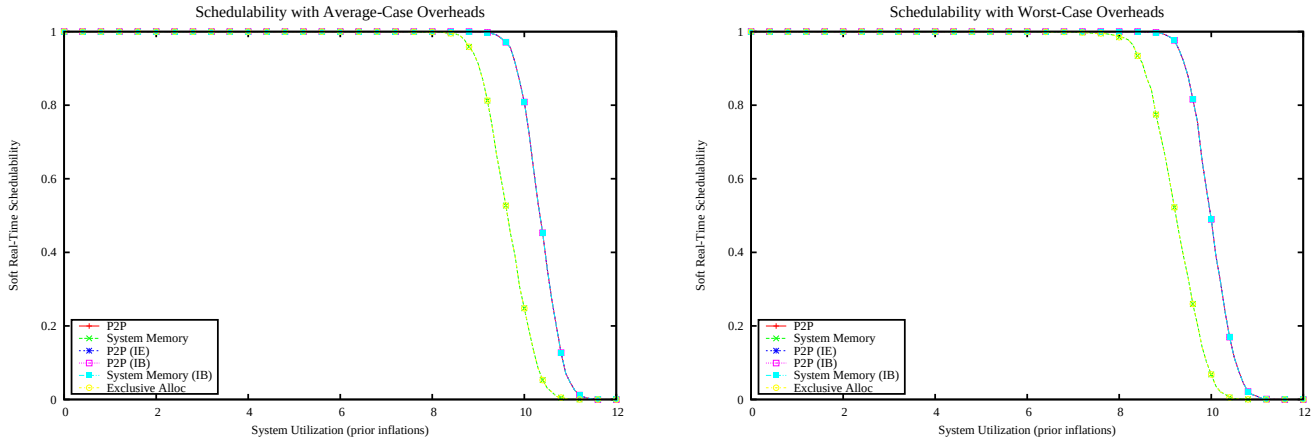

Figure 4470: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

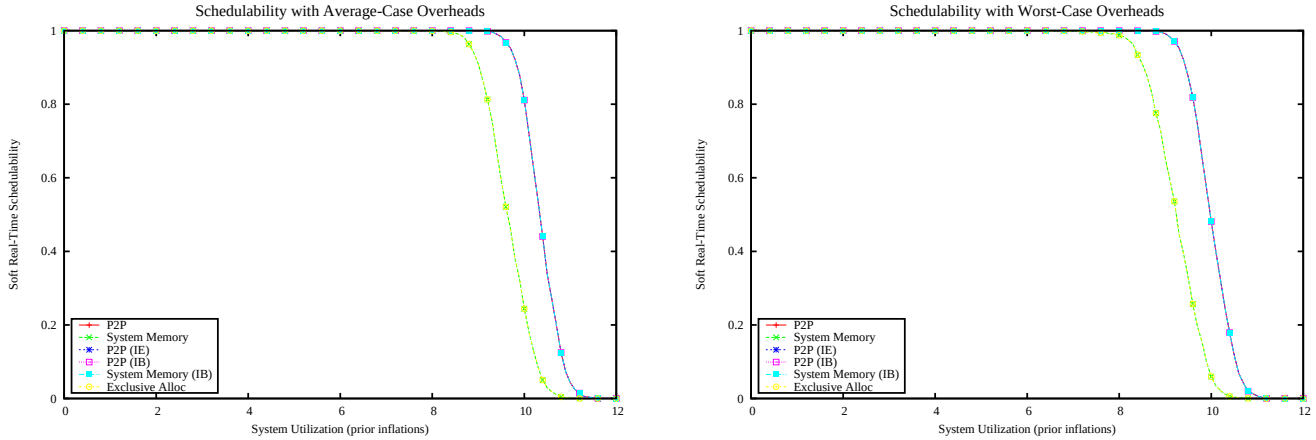

Figure 4471: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

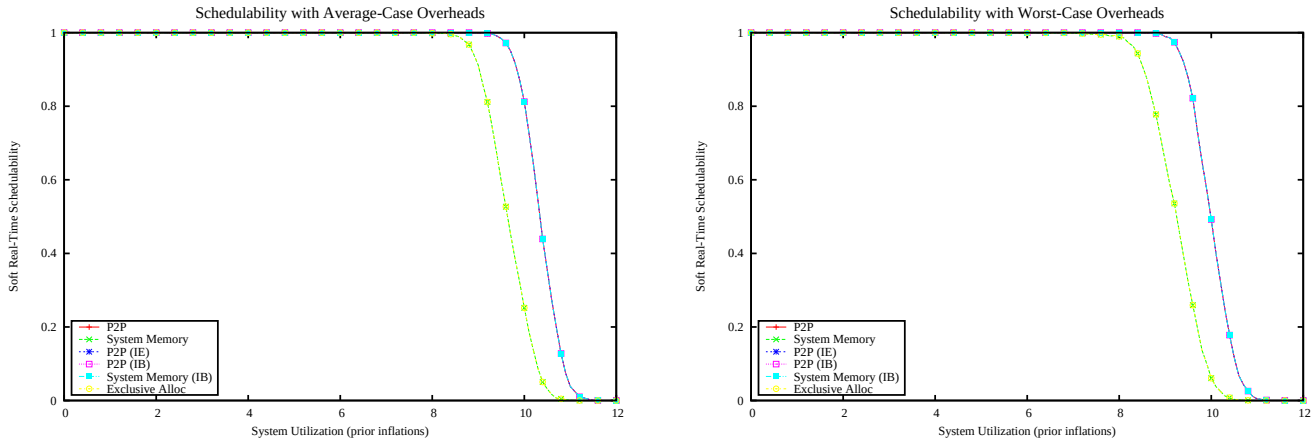

Figure 4472: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

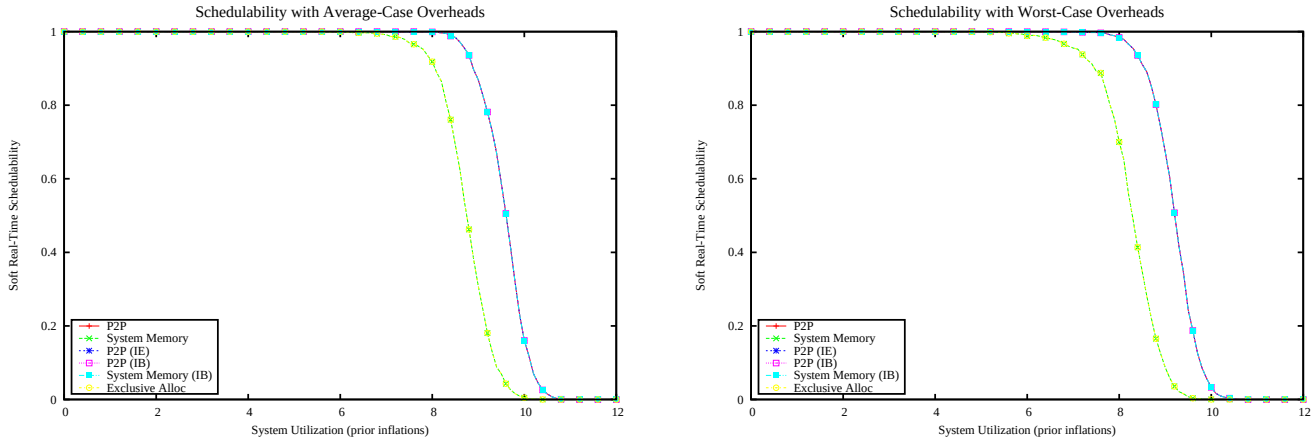

Figure 4473: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

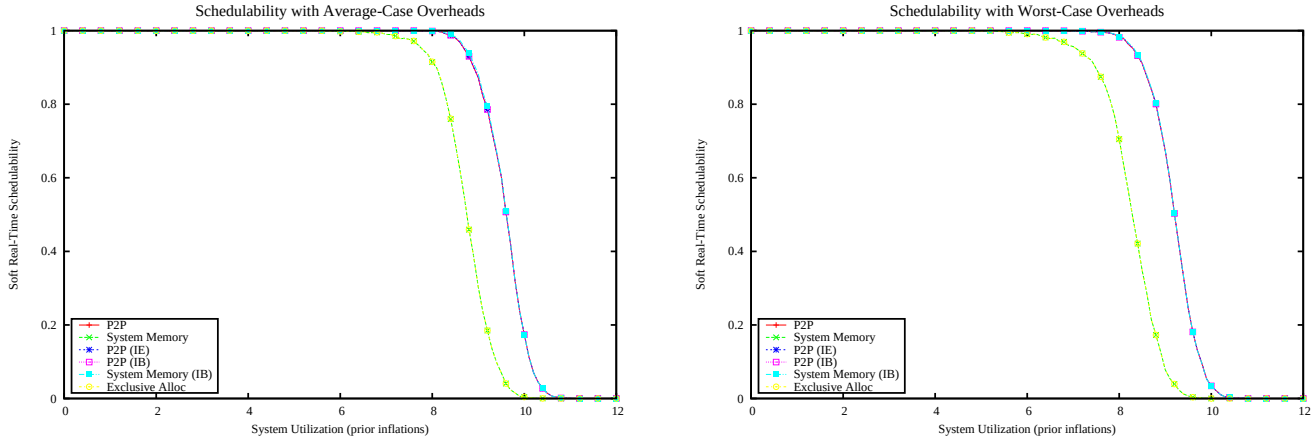

Figure 4474: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

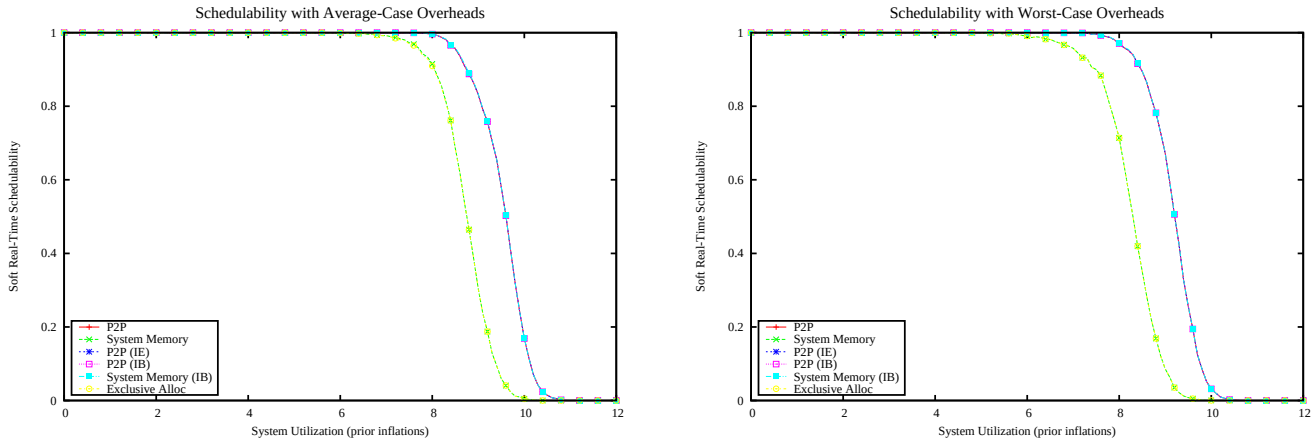

Figure 4475: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

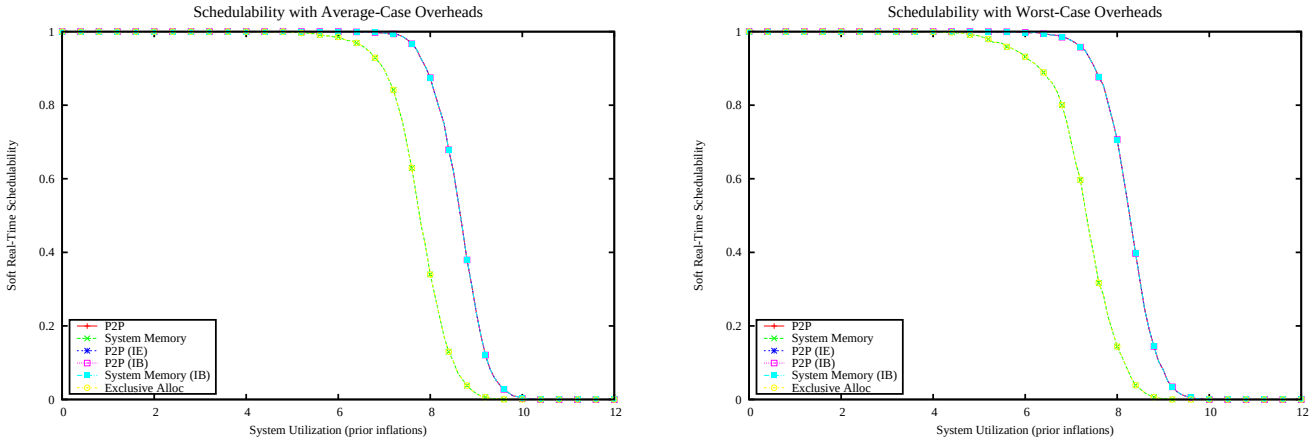

Figure 4476: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

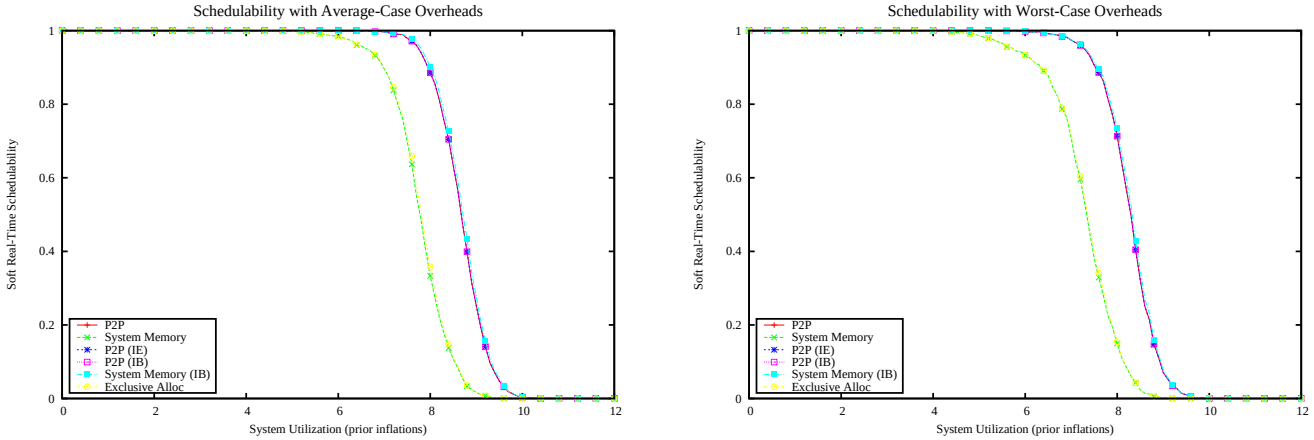

Figure 4477: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

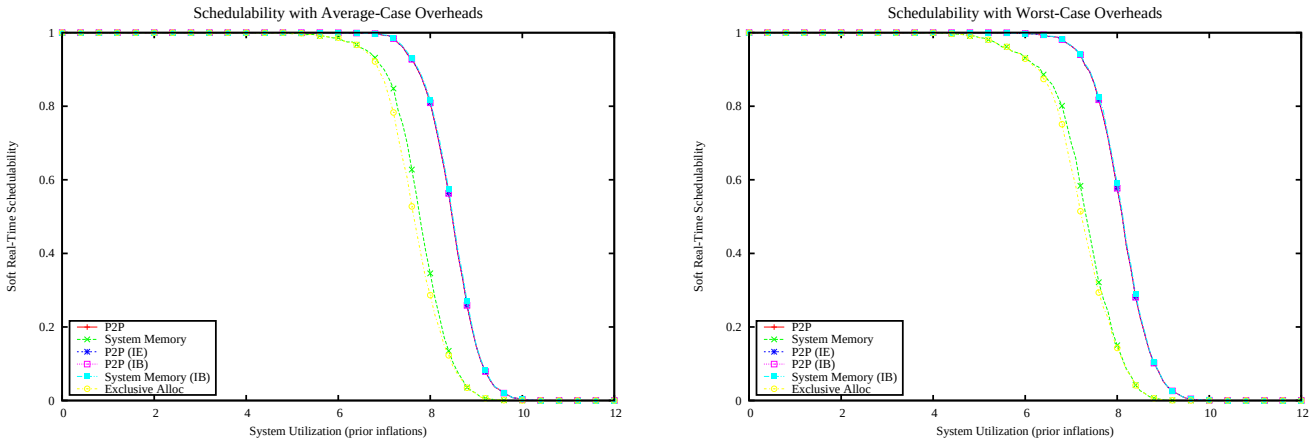

Figure 4478: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

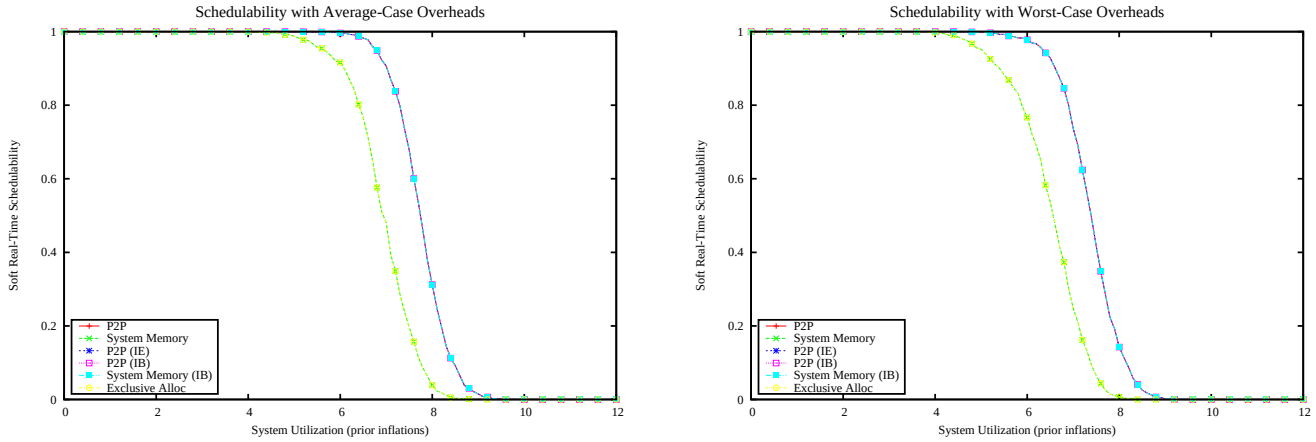

Figure 4479: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

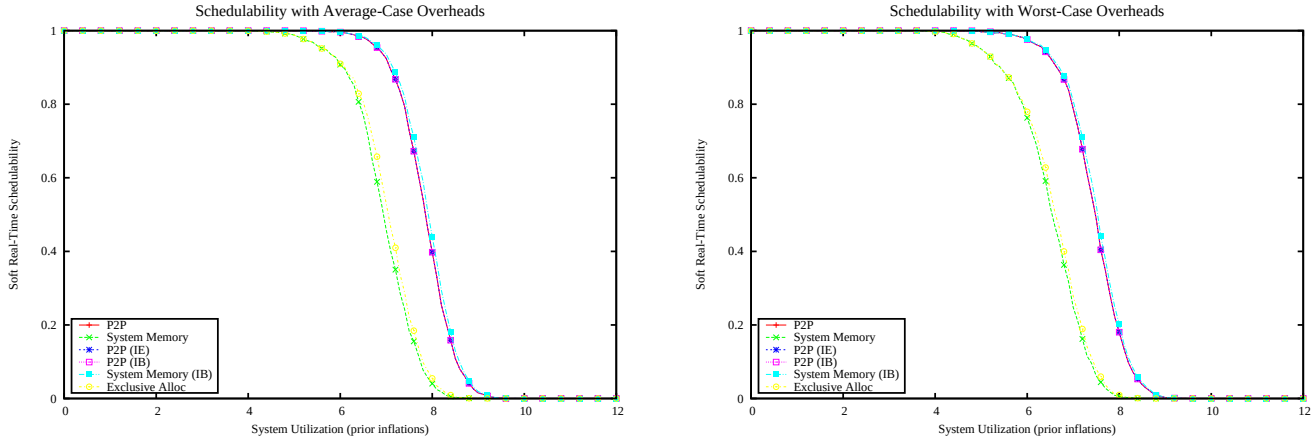

Figure 4480: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

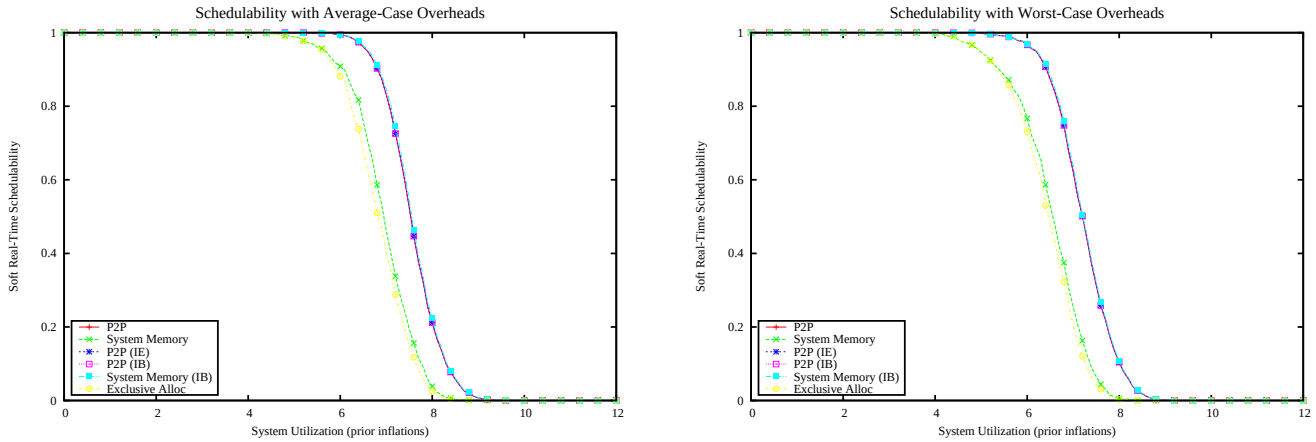

Figure 4481: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

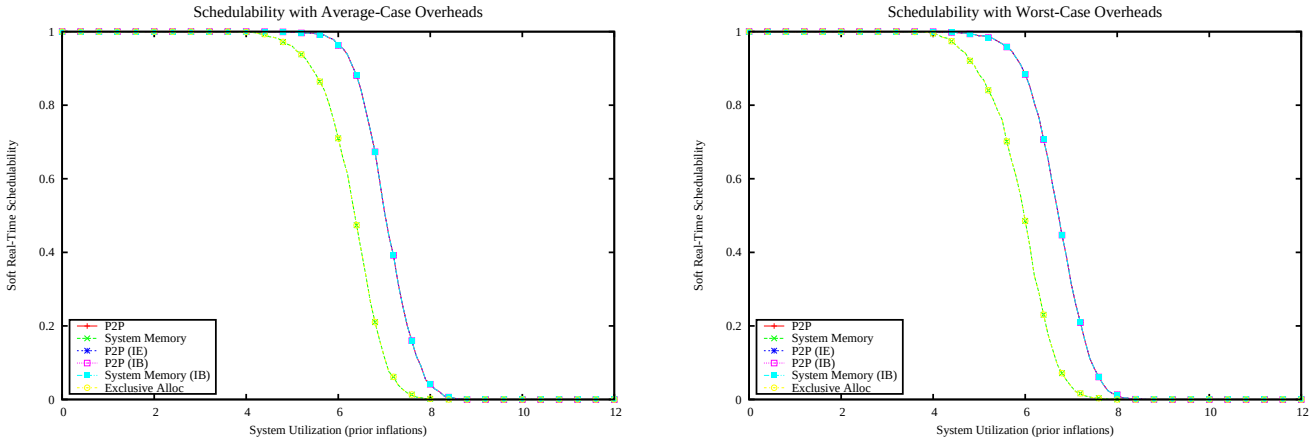

Figure 4482: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

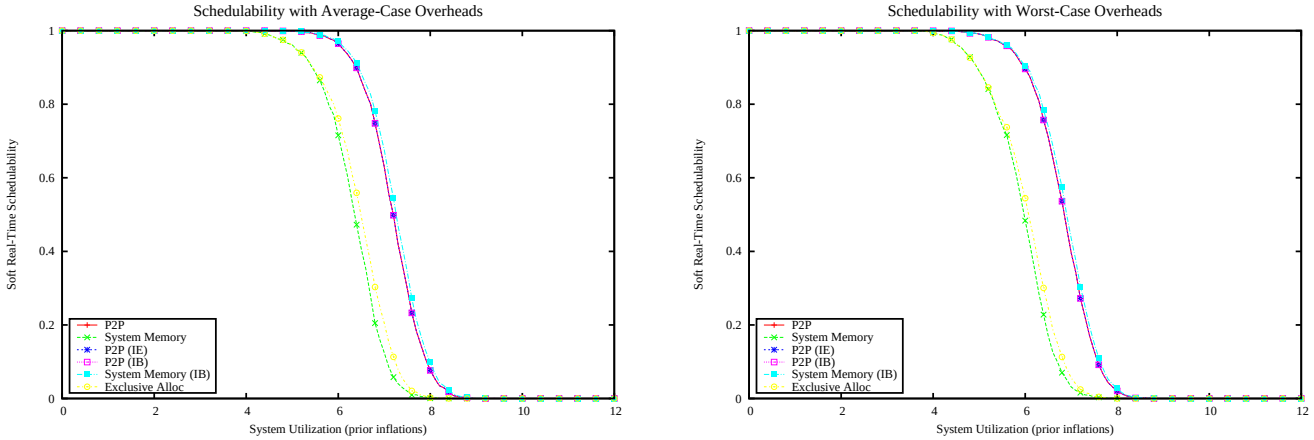

Figure 4483: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

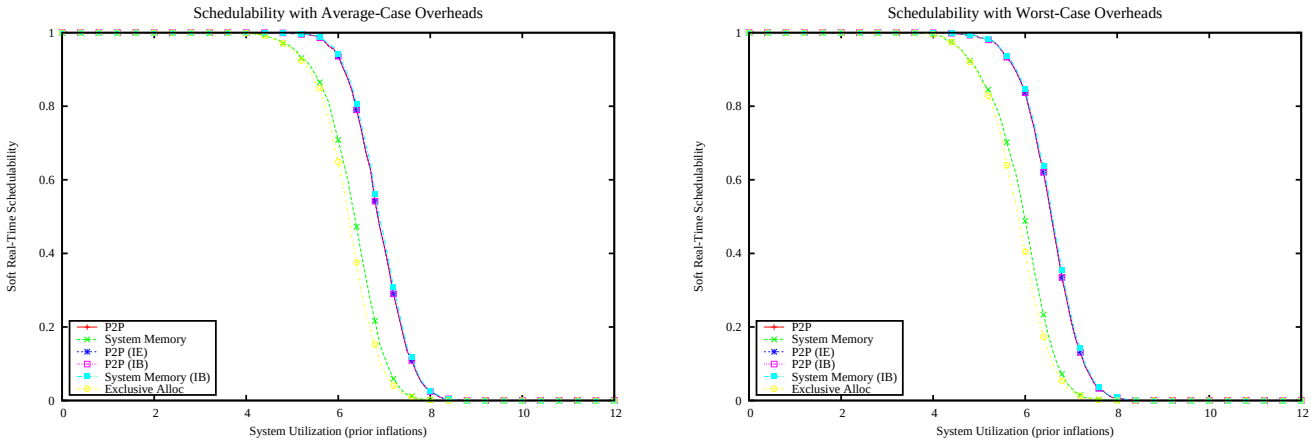

Figure 4484: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

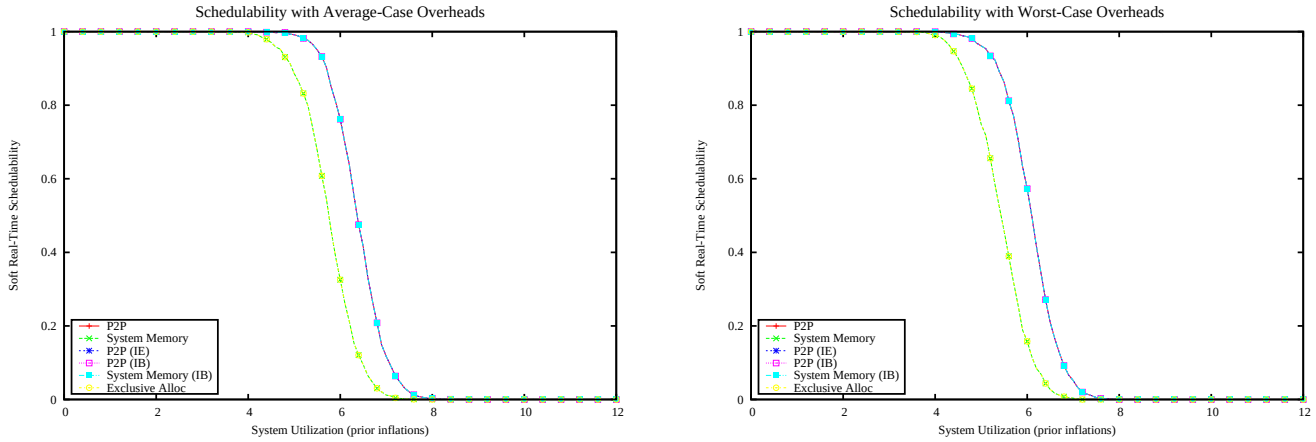

Figure 4485: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

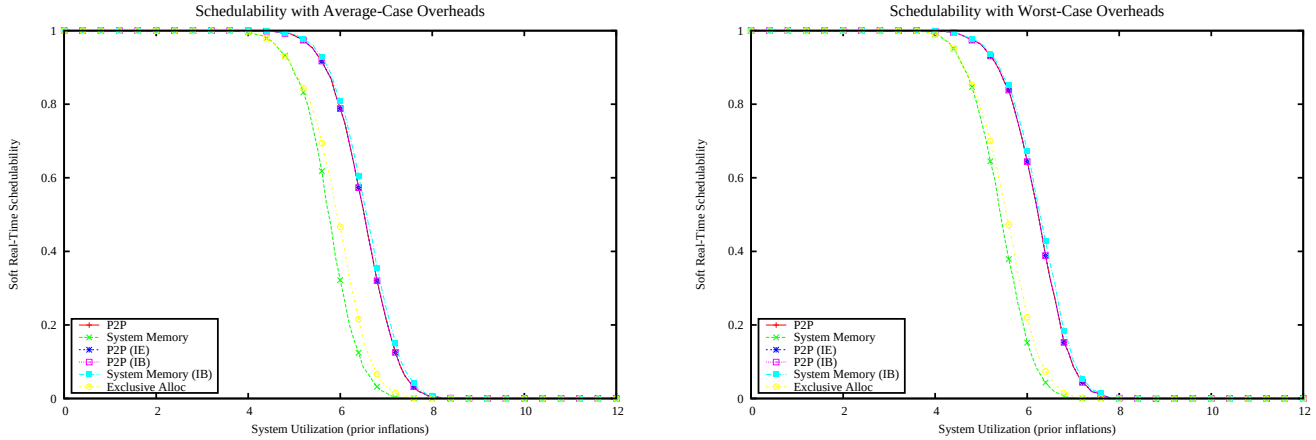

Figure 4486: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

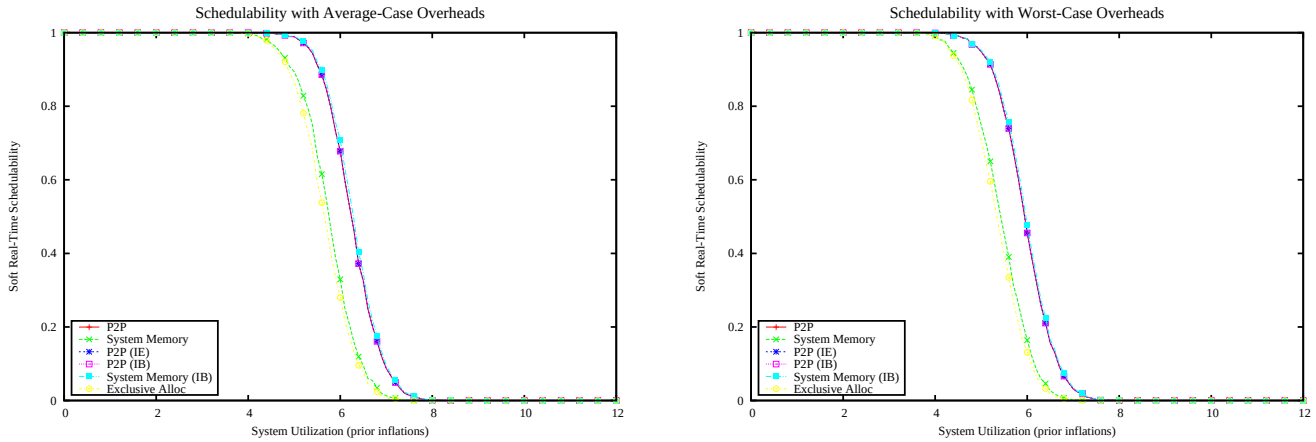

Figure 4487: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

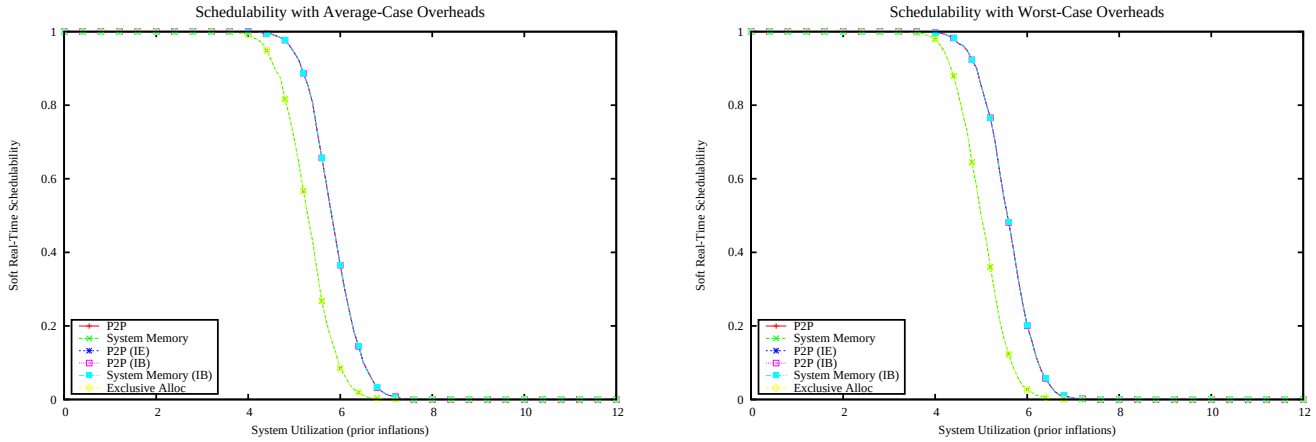

Figure 4488: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

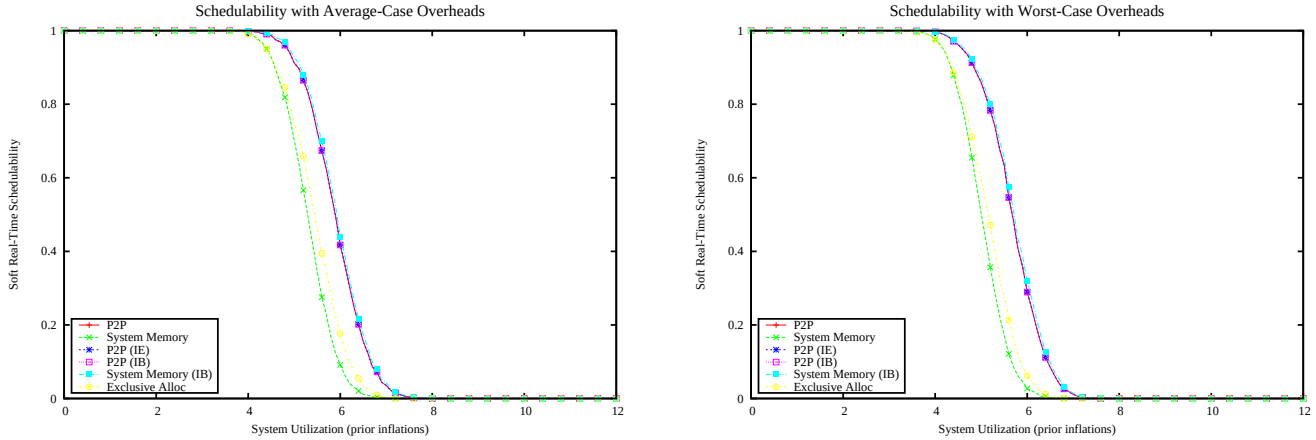

Figure 4489: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

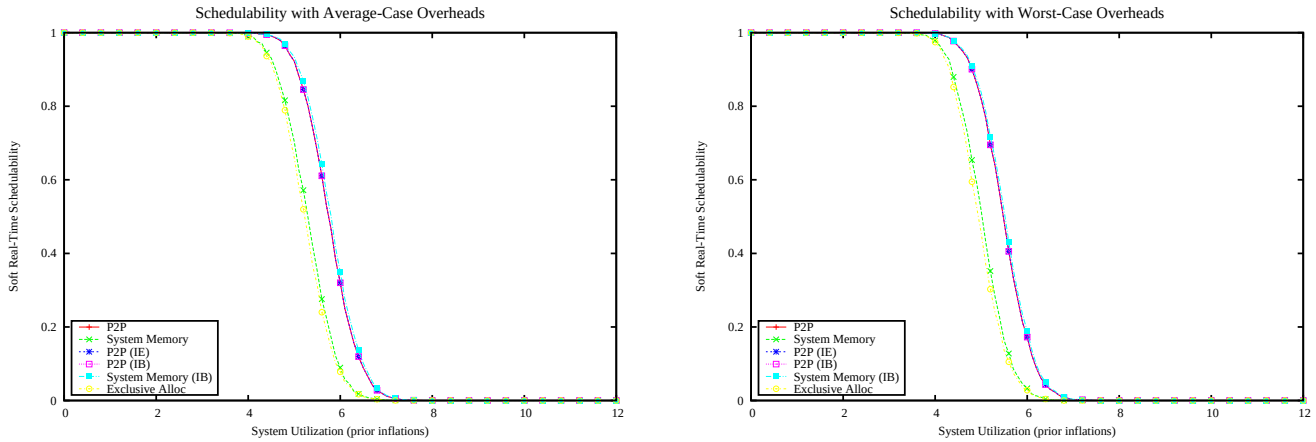

Figure 4490: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

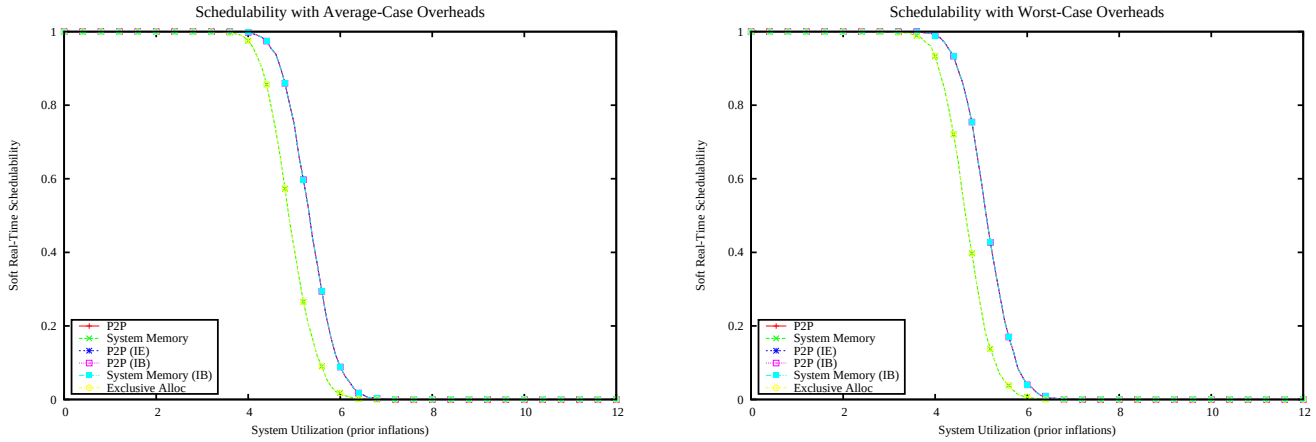

Figure 4491: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

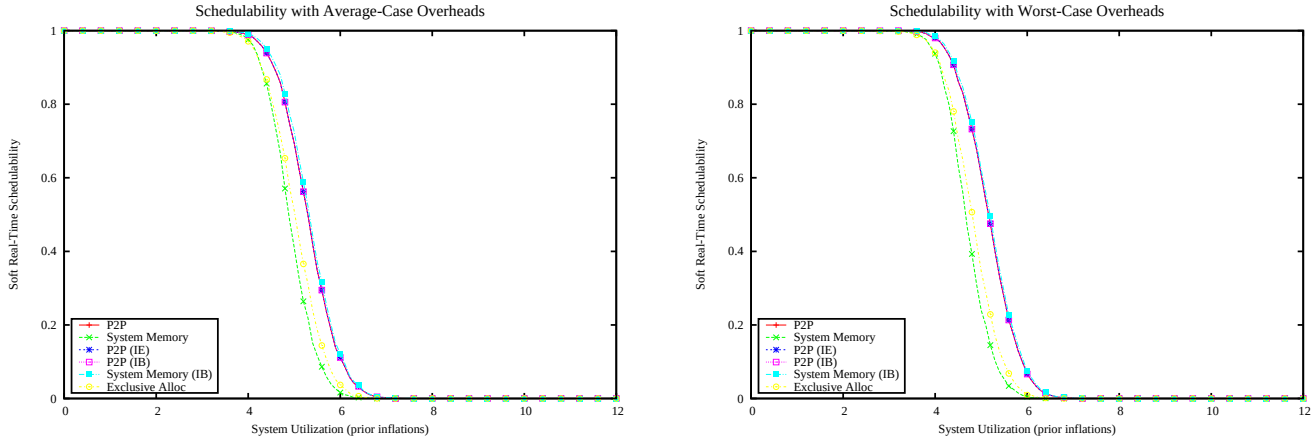

Figure 4492: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

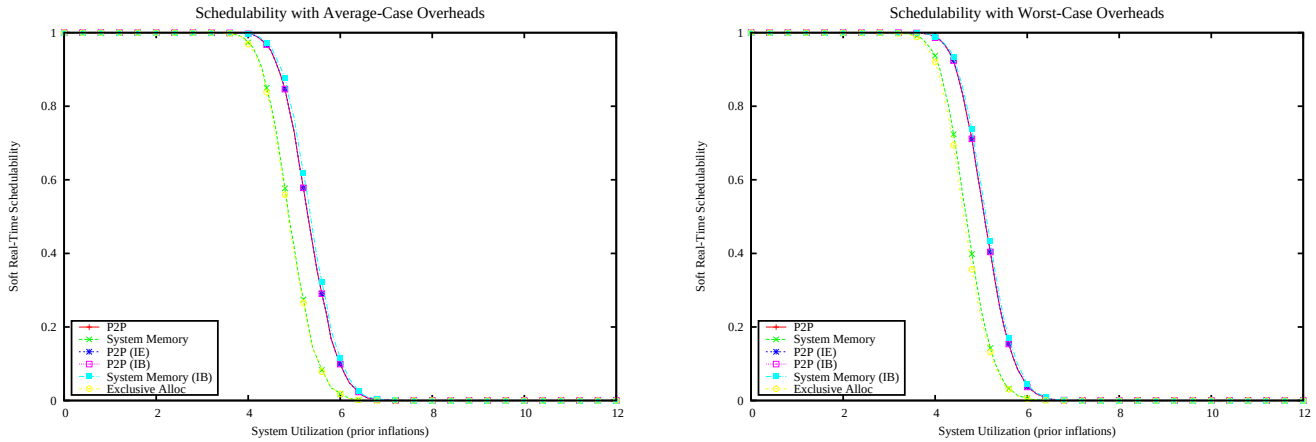

Figure 4493: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

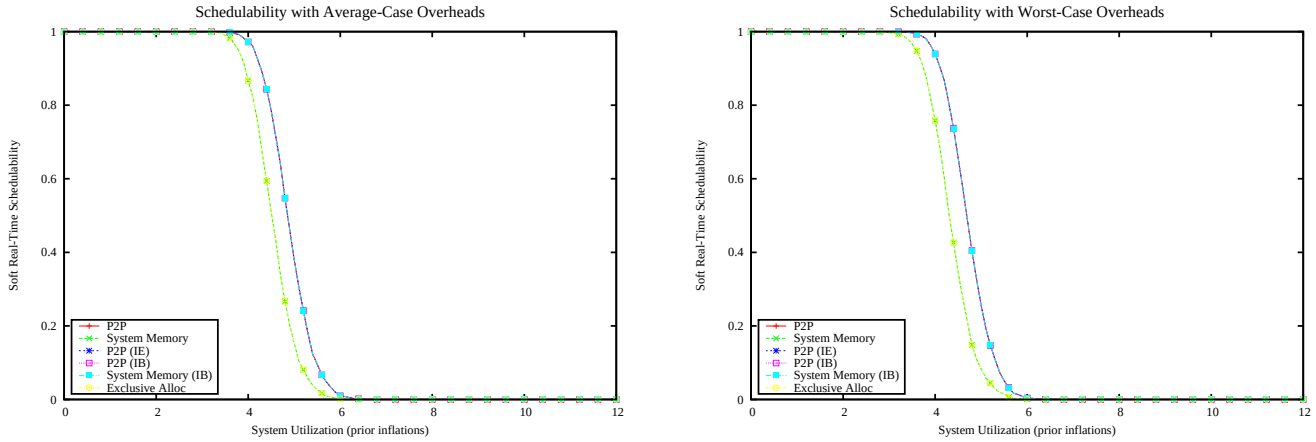

Figure 4494: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

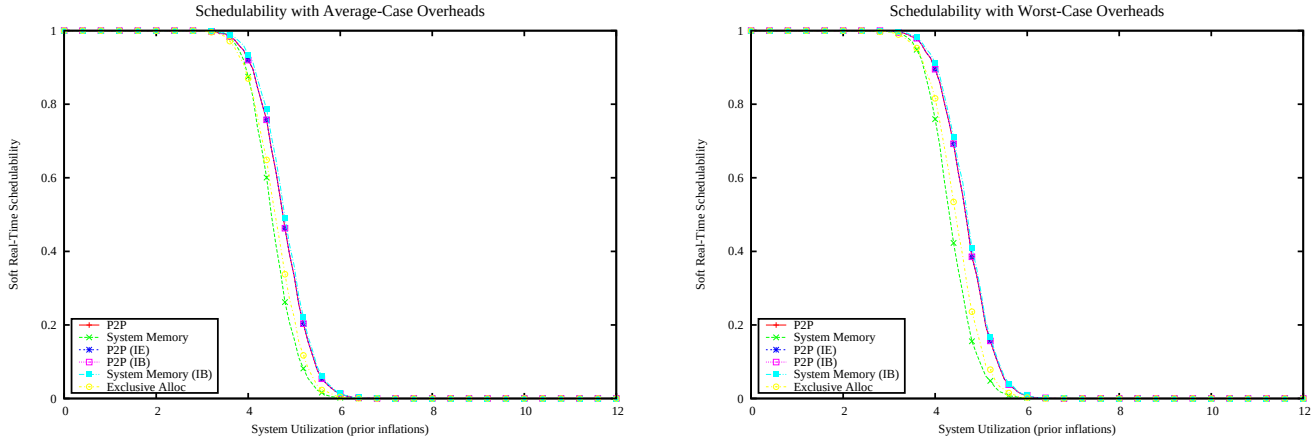

Figure 4495: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

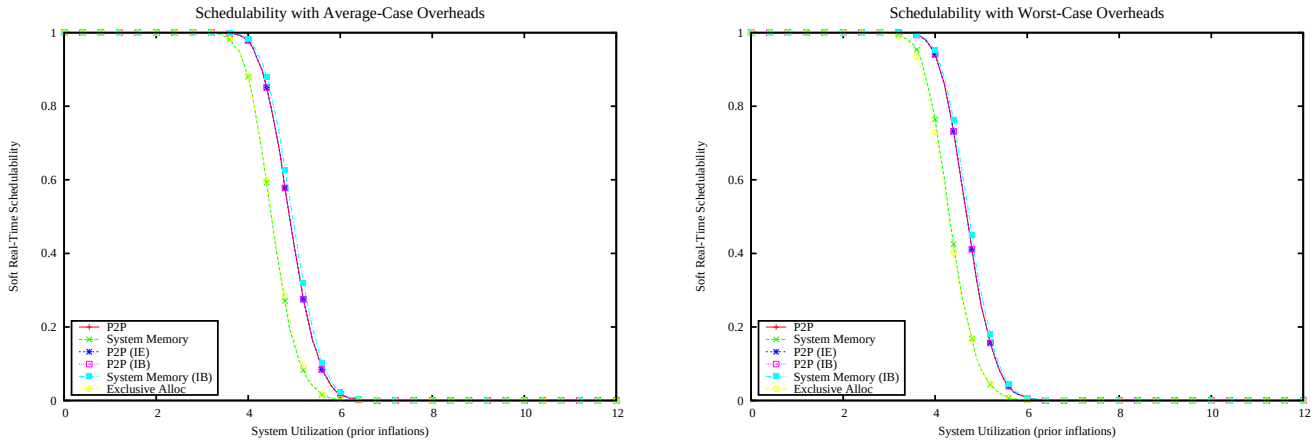

Figure 4496: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

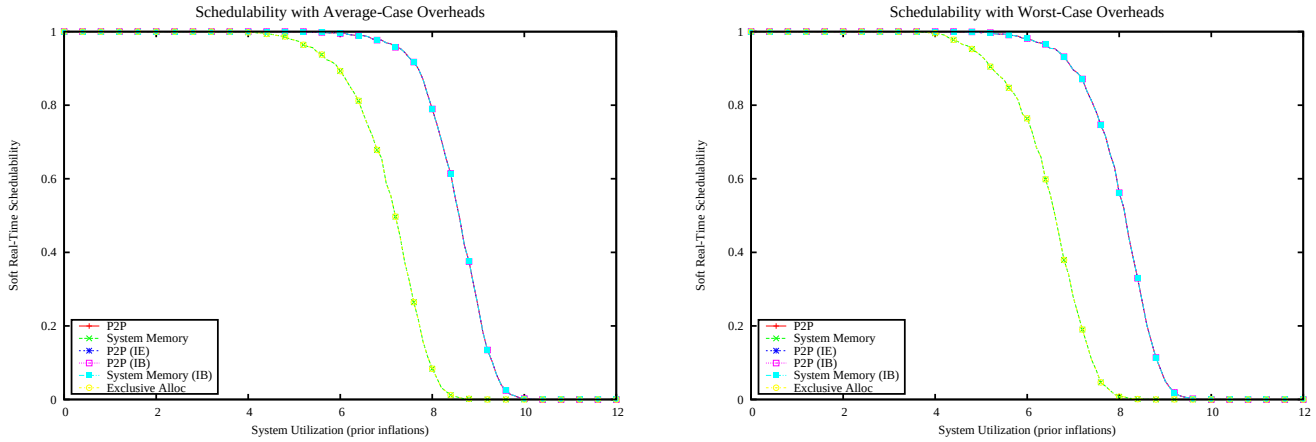

Figure 4497: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

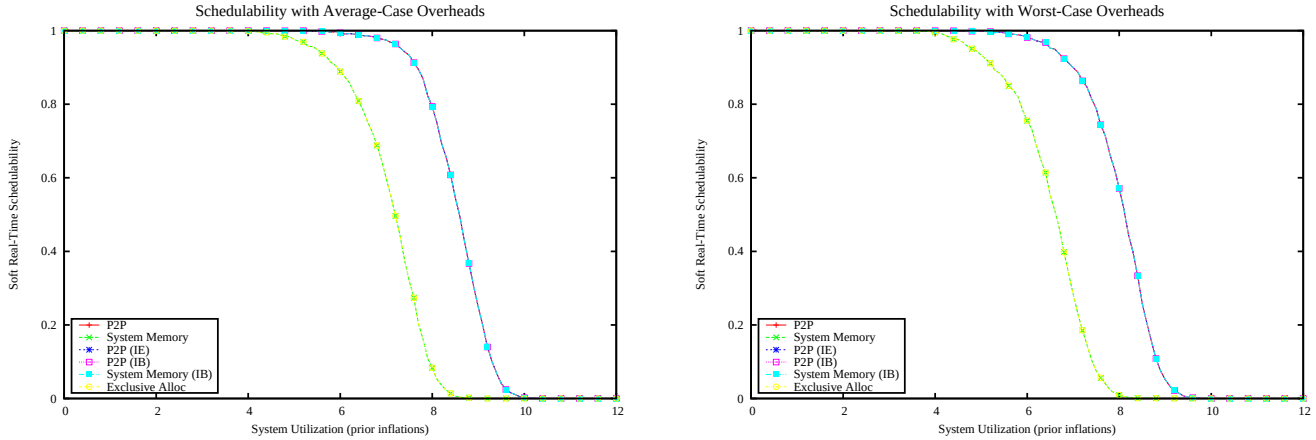

Figure 4498: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

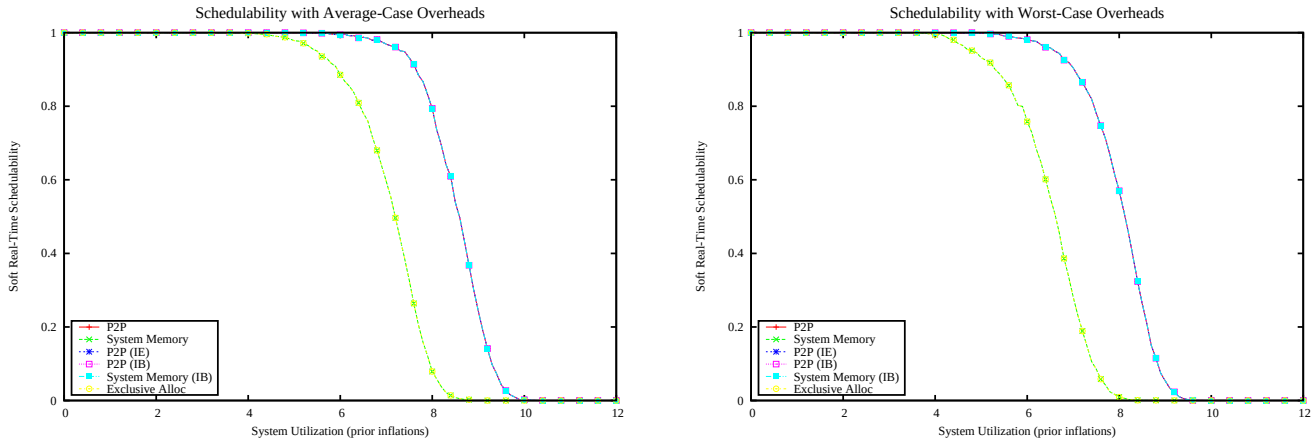

Figure 4499: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

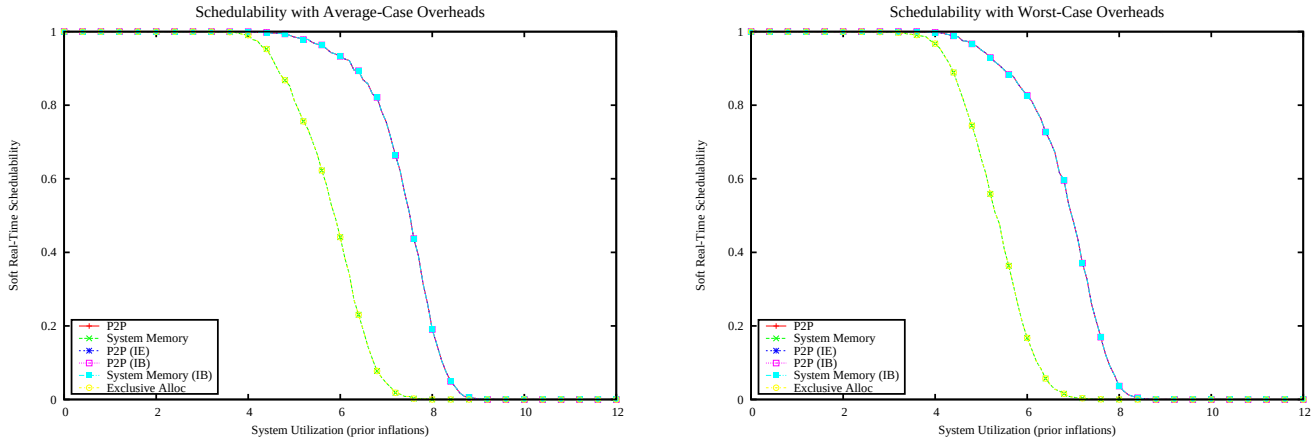

Figure 4500: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

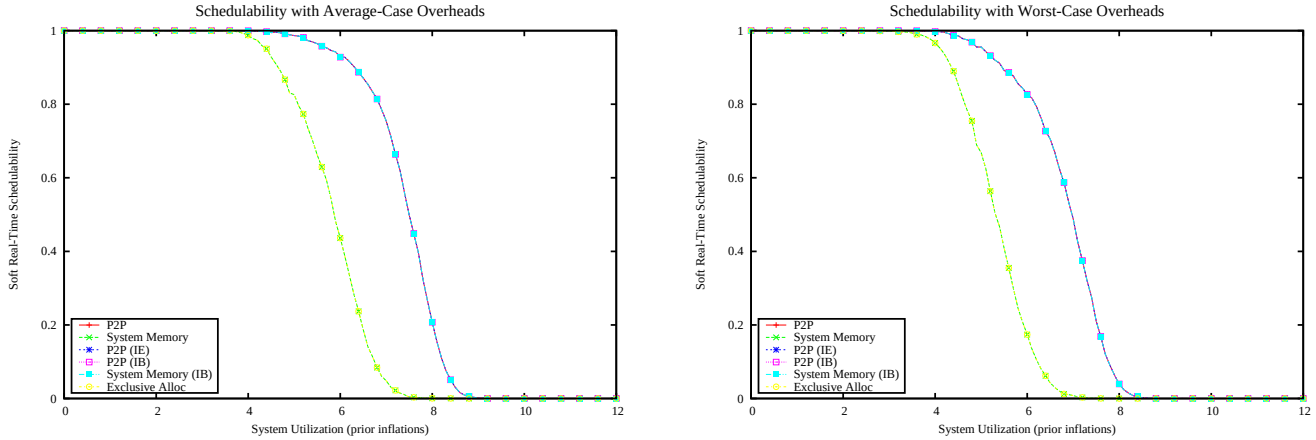

Figure 4501: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

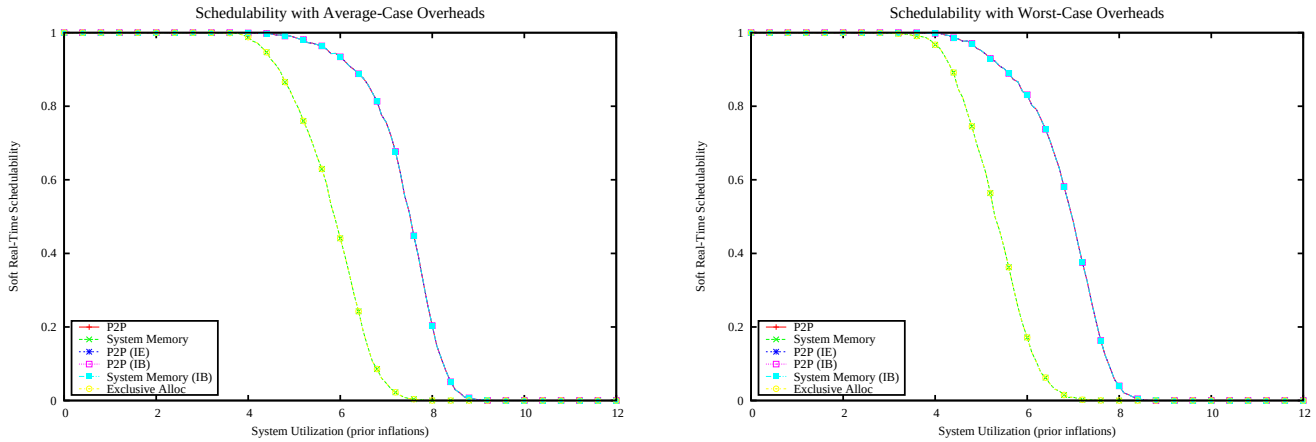

Figure 4502: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

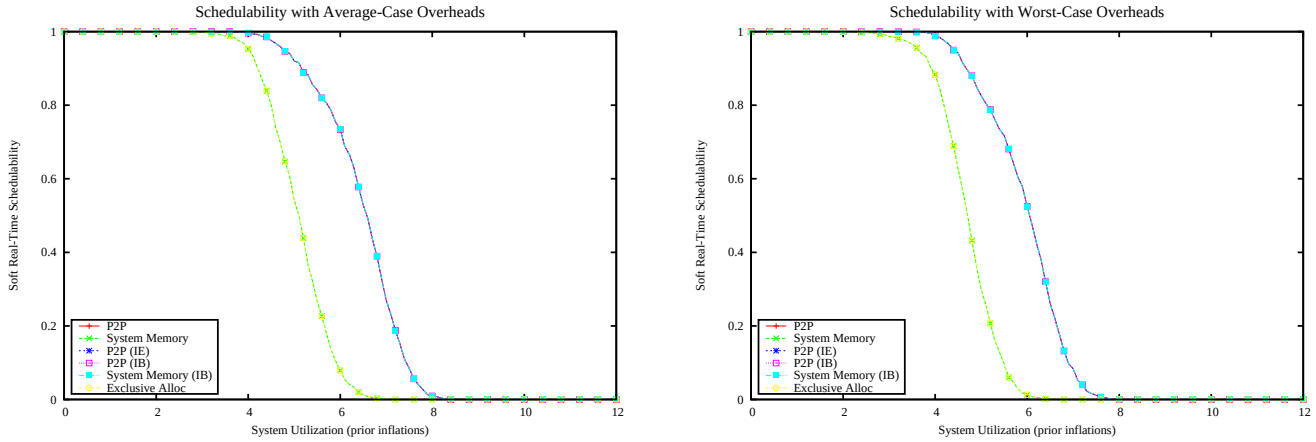

Figure 4503: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

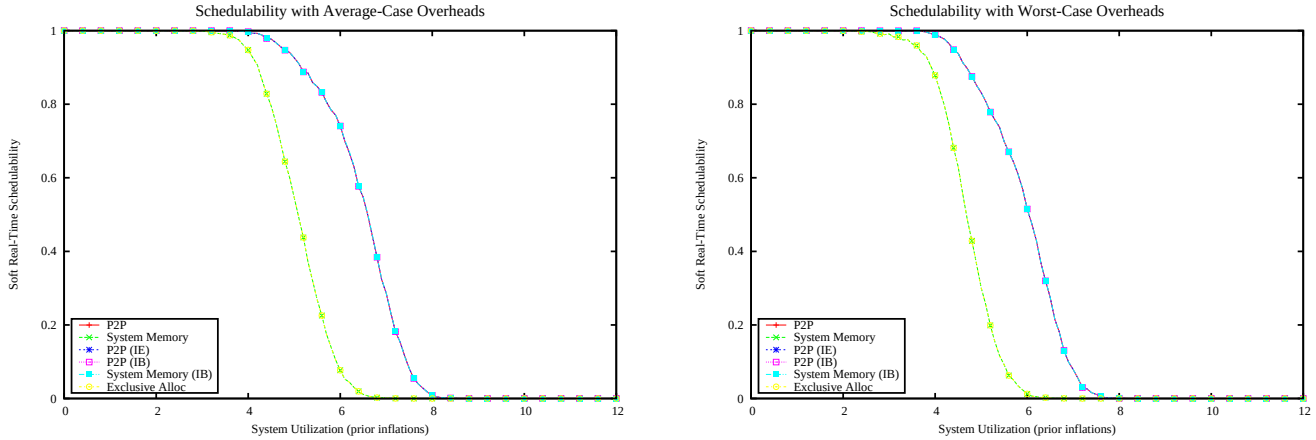

Figure 4504: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

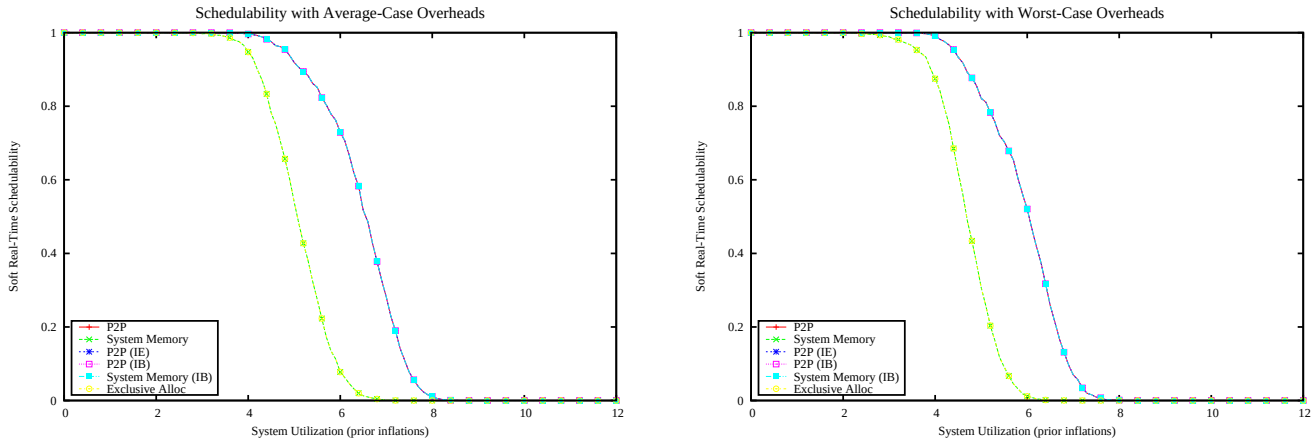

Figure 4505: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

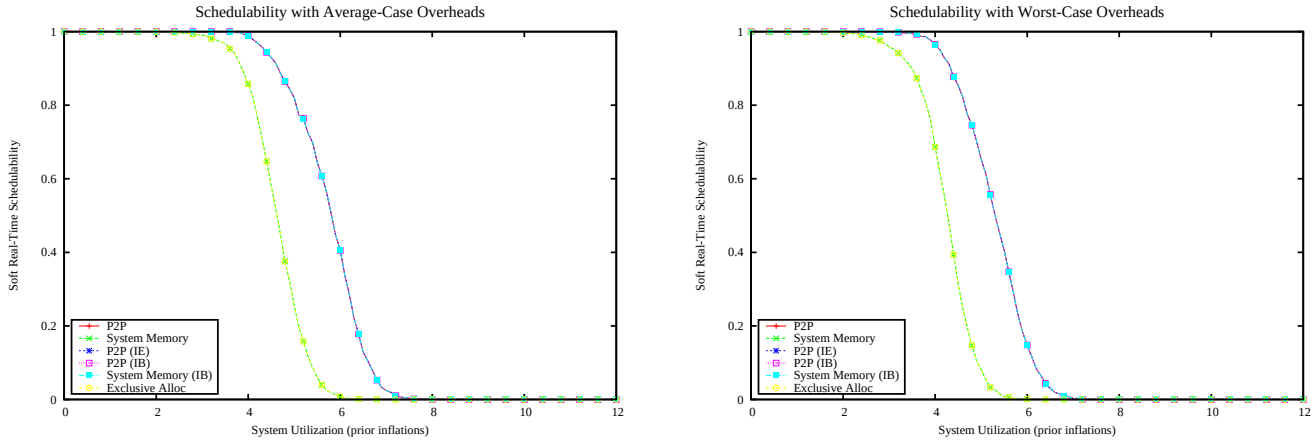

Figure 4506: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

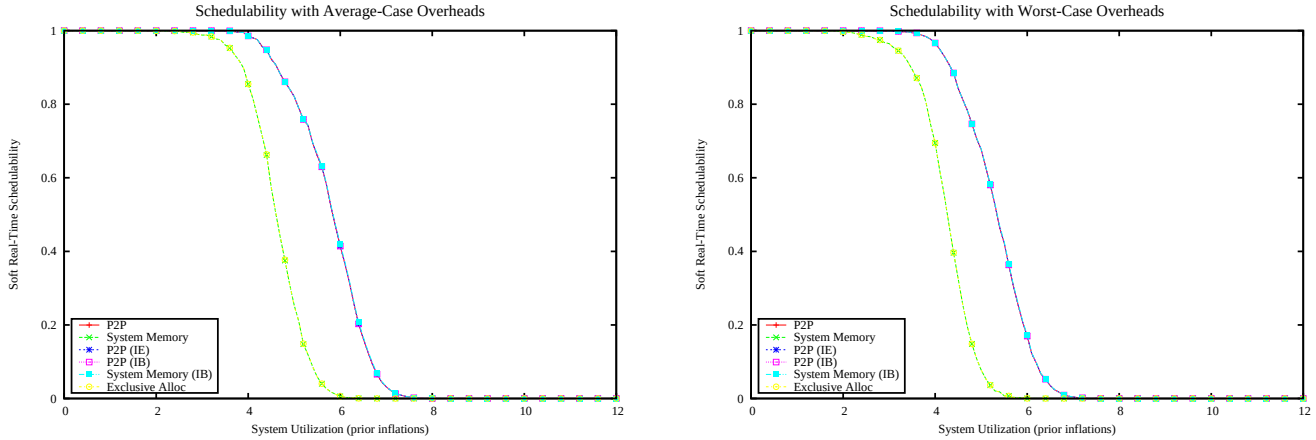

Figure 4507: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

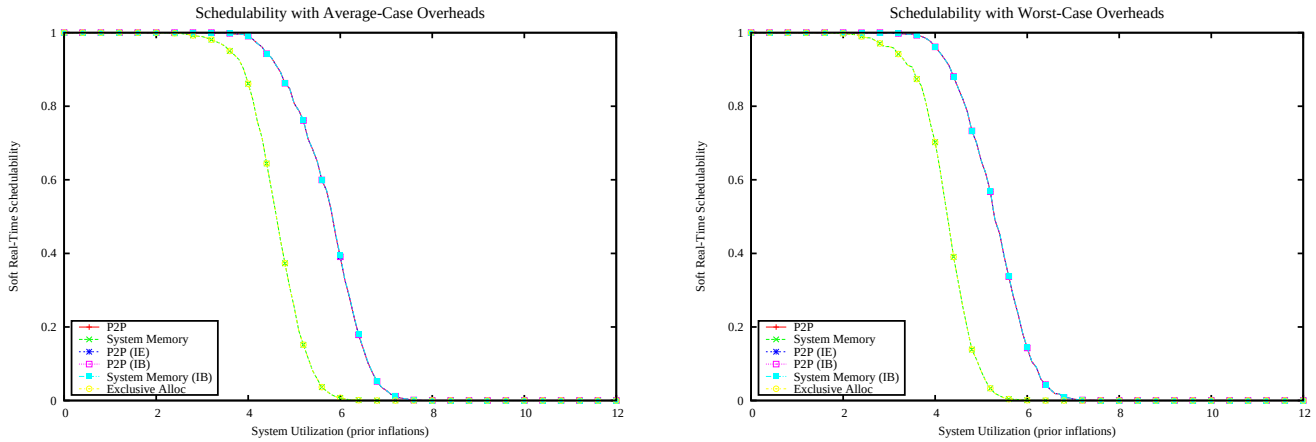

Figure 4508: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

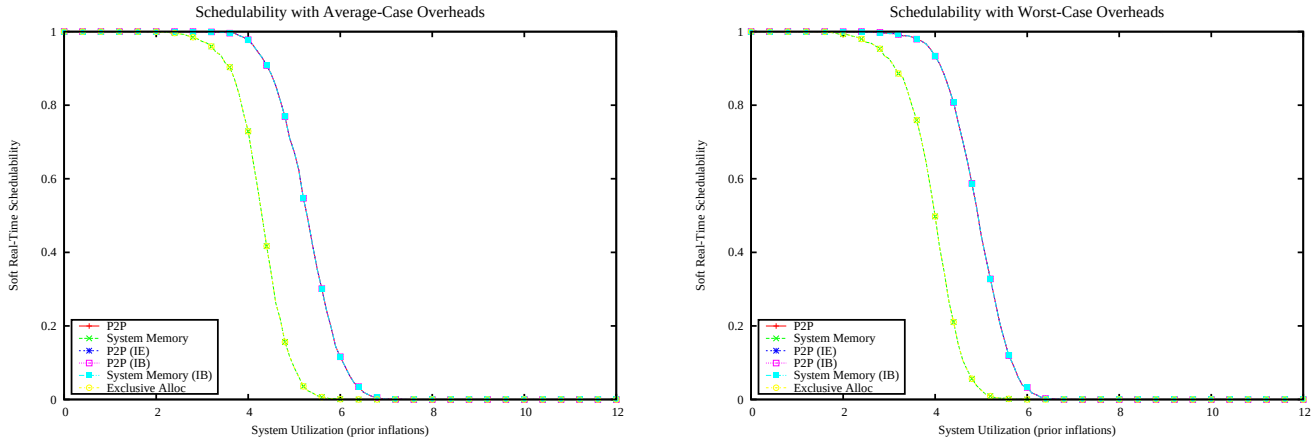

Figure 4509: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

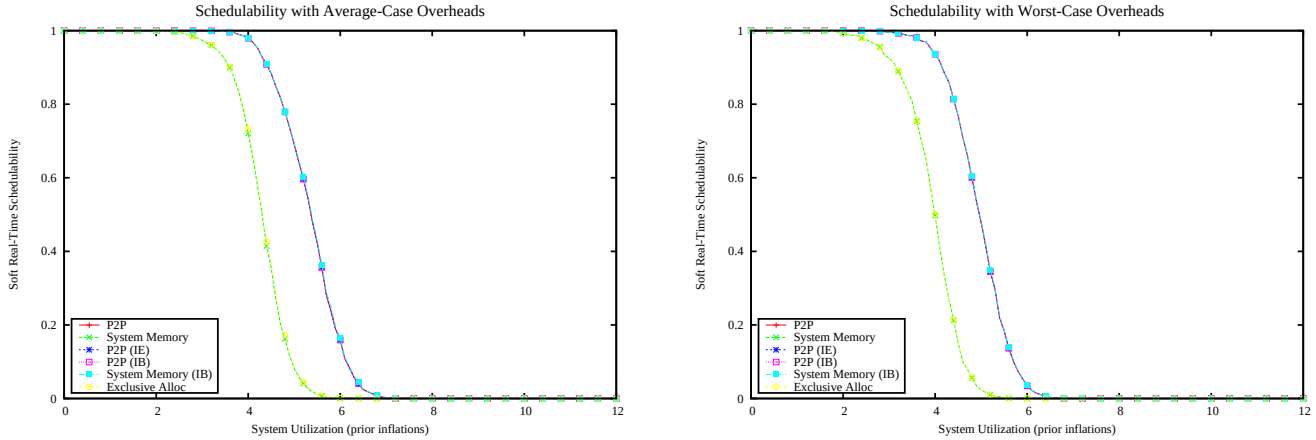

Figure 4510: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

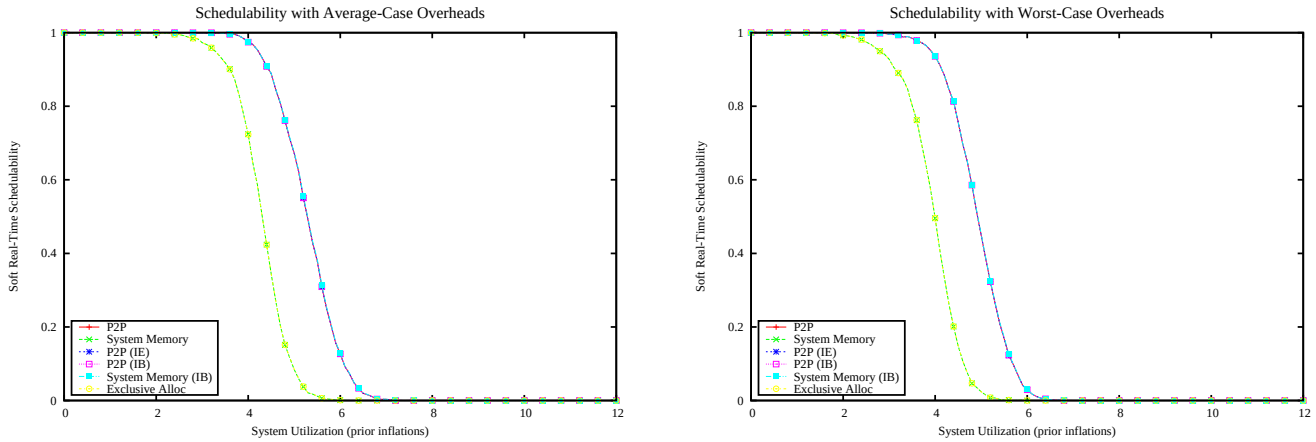

Figure 4511: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

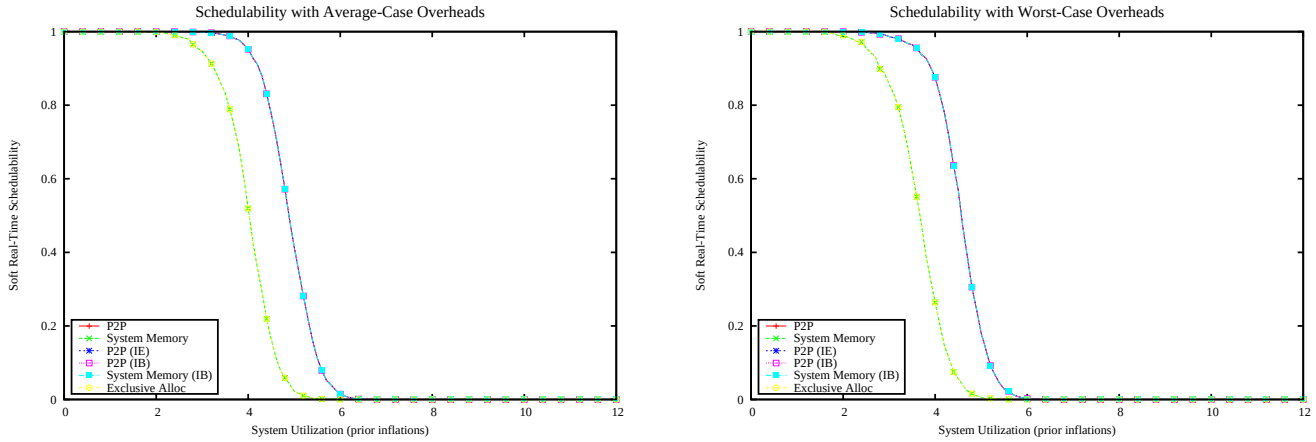

Figure 4512: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

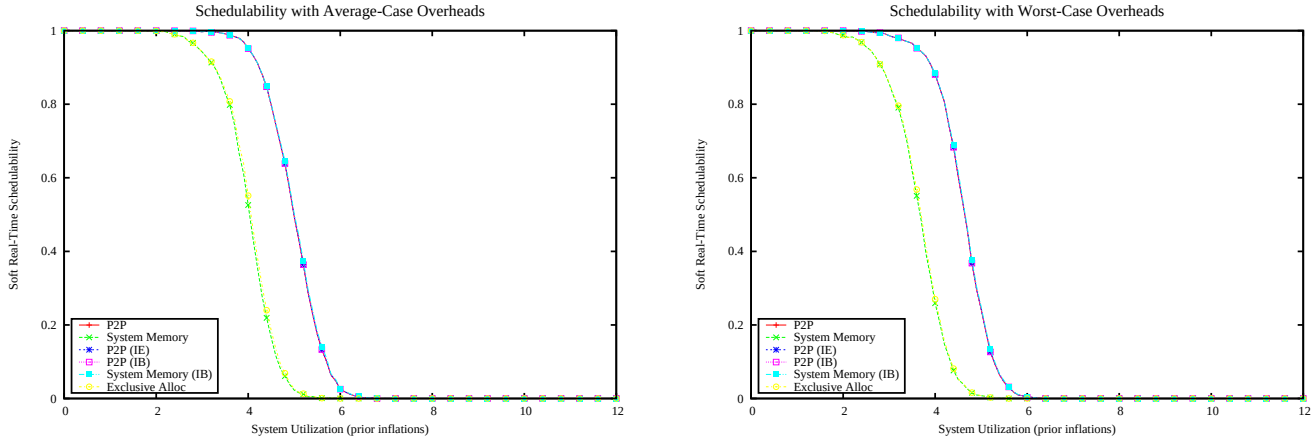

Figure 4513: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

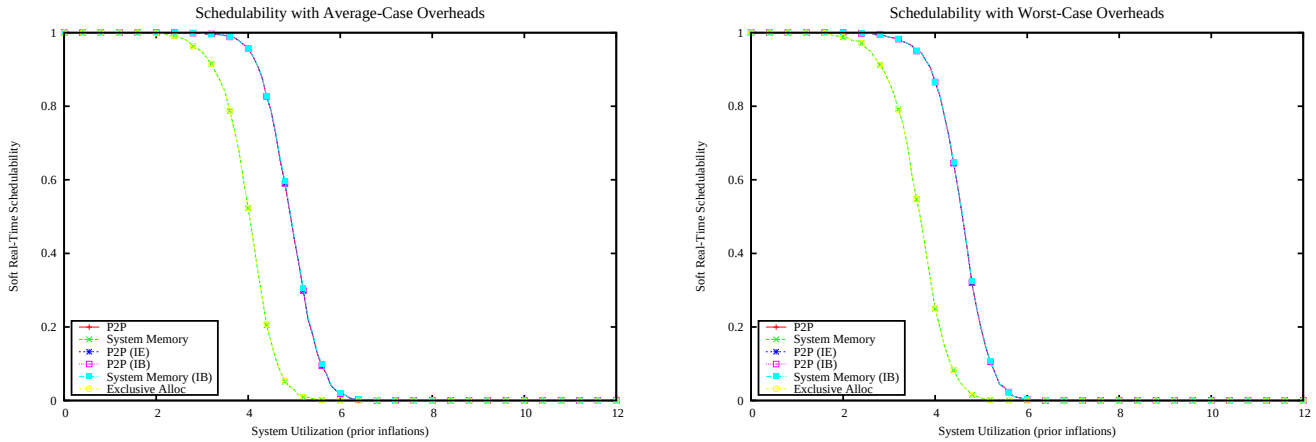

Figure 4514: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

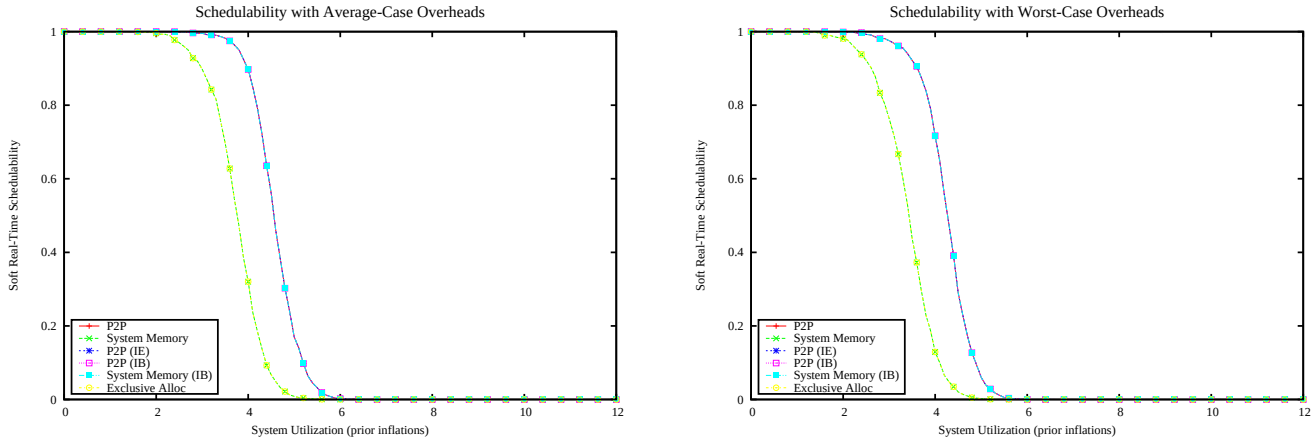

Figure 4515: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

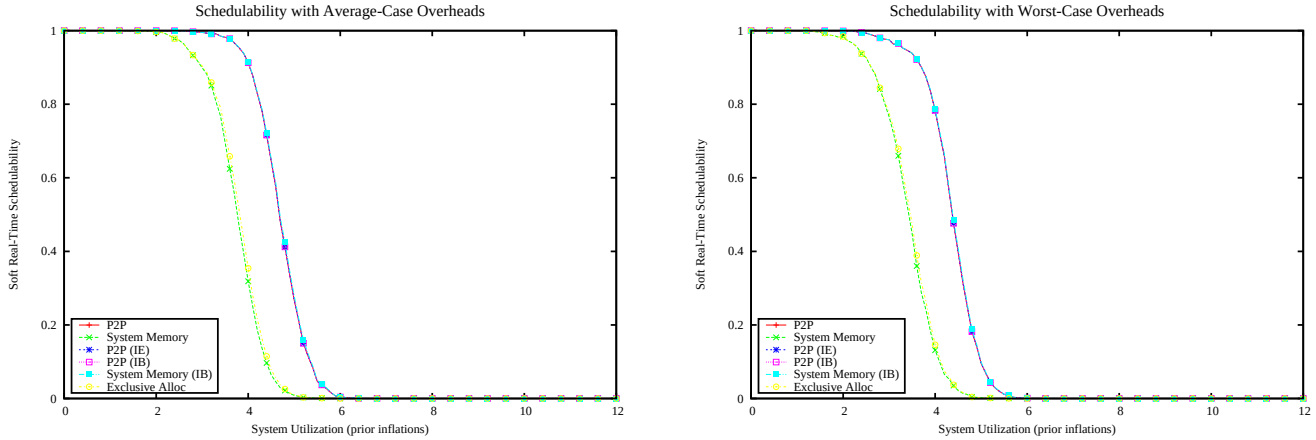

Figure 4516: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

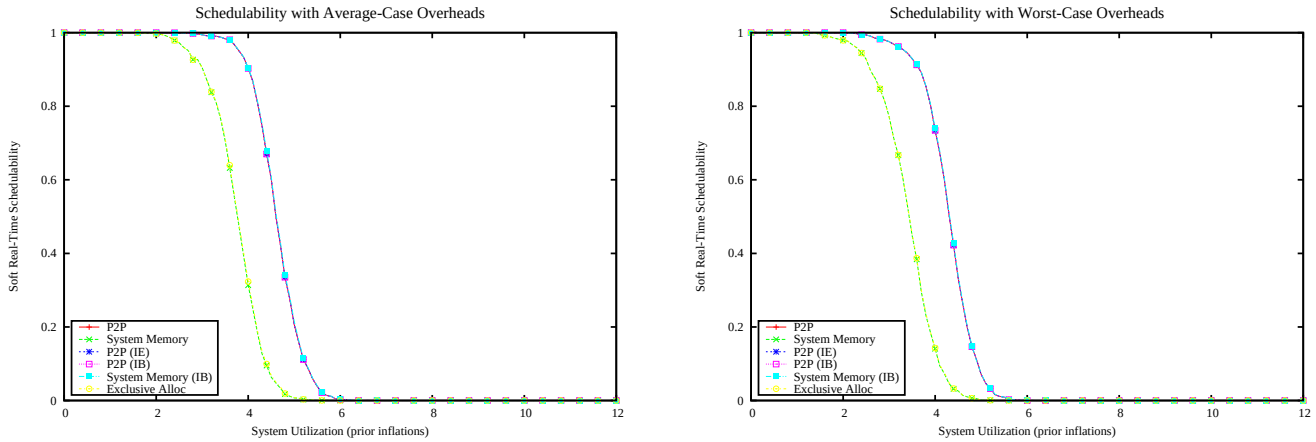

Figure 4517: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

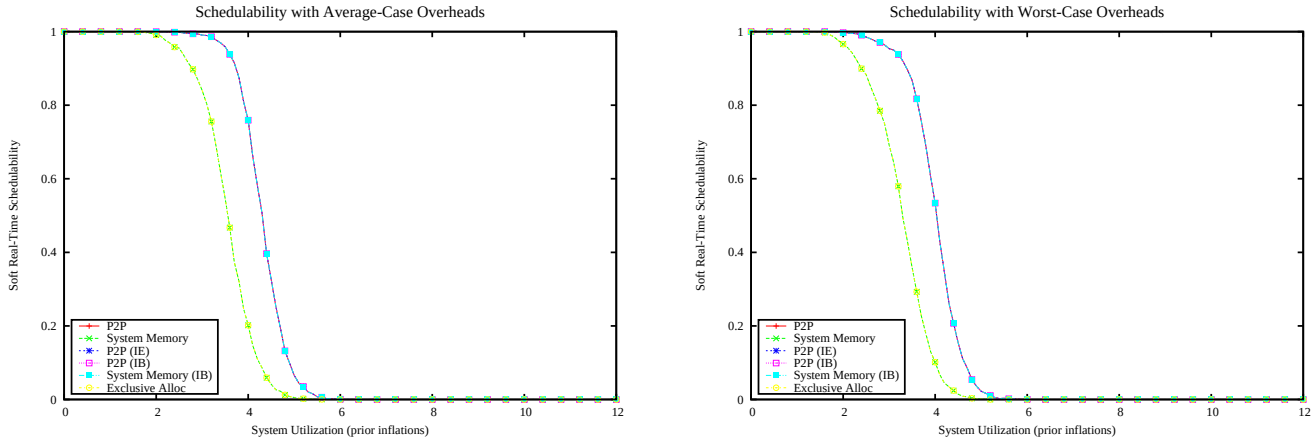

Figure 4518: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

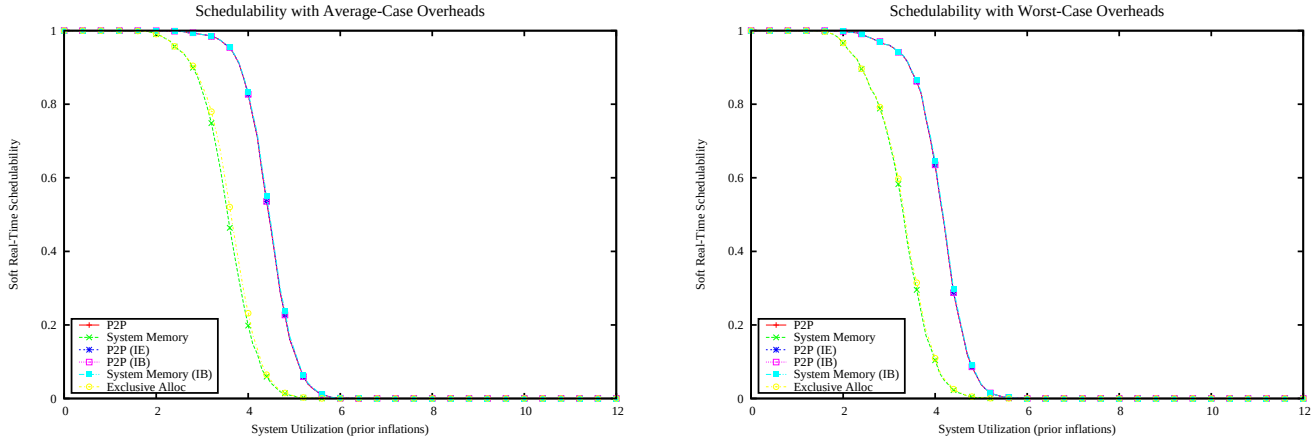

Figure 4519: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

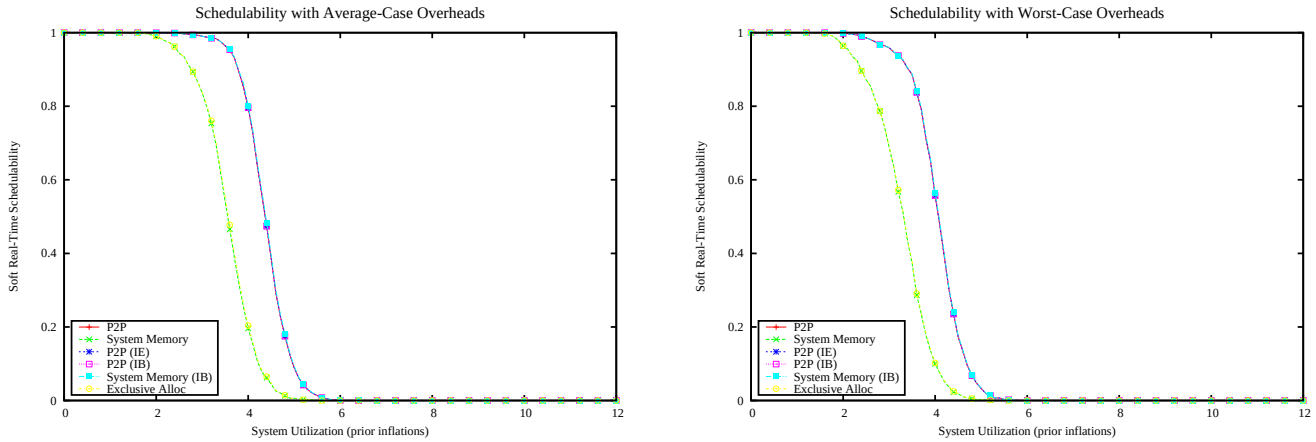

Figure 4520: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

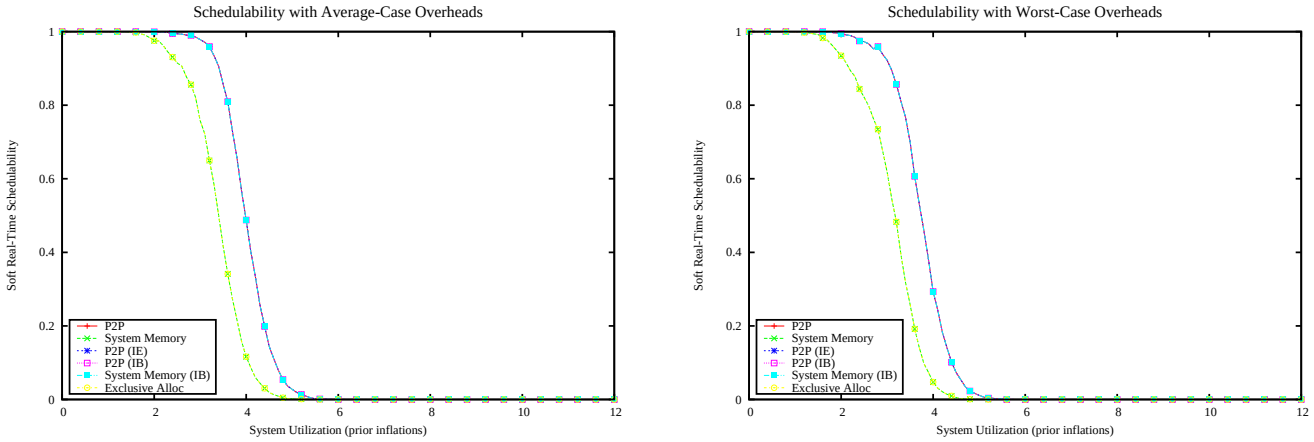

Figure 4521: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

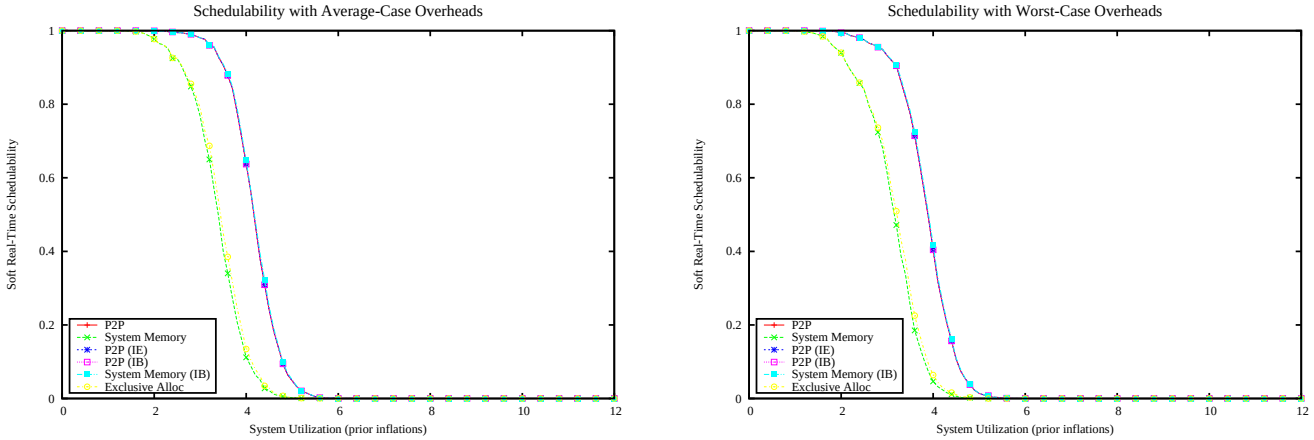

Figure 4522: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

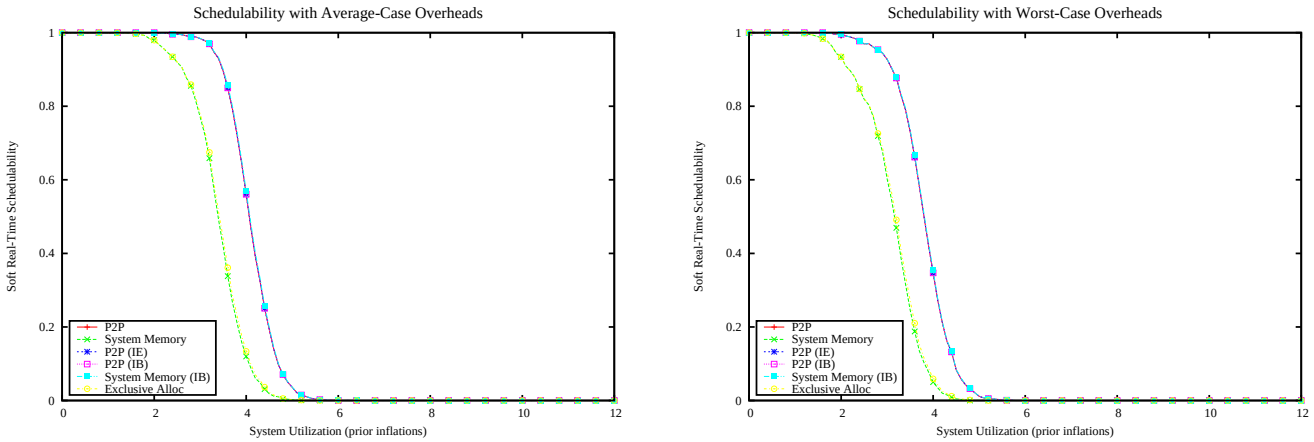

Figure 4523: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

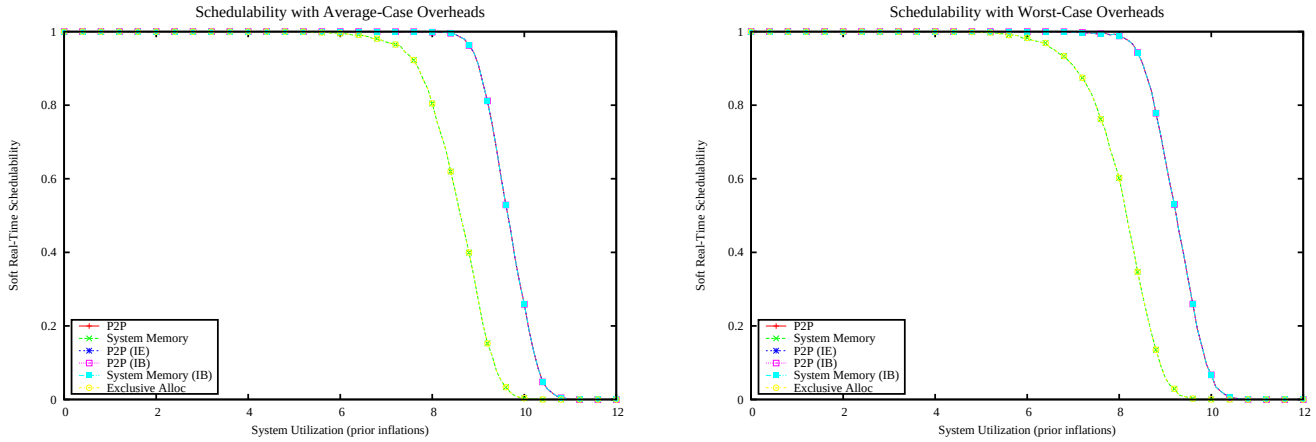

Figure 4524: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

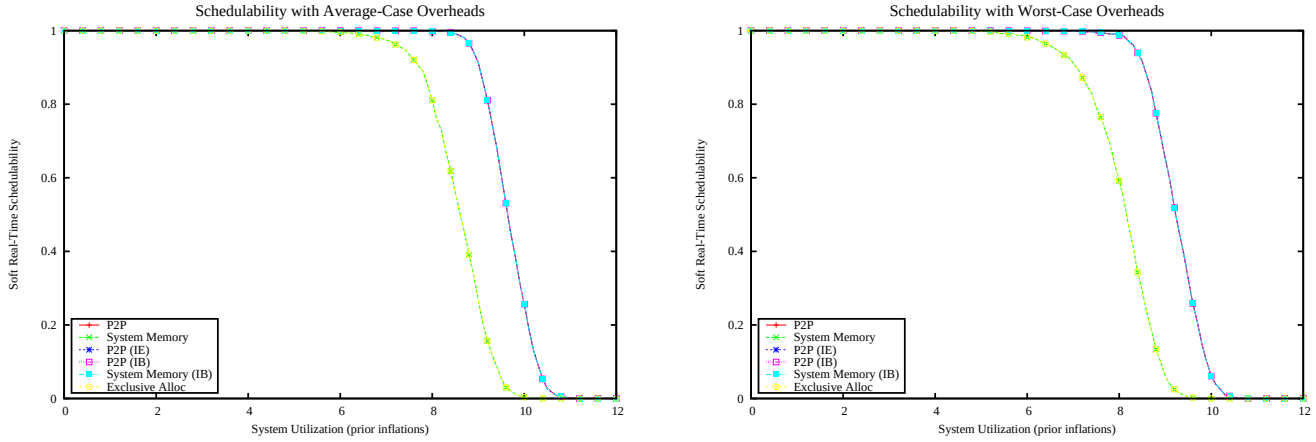

Figure 4525: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

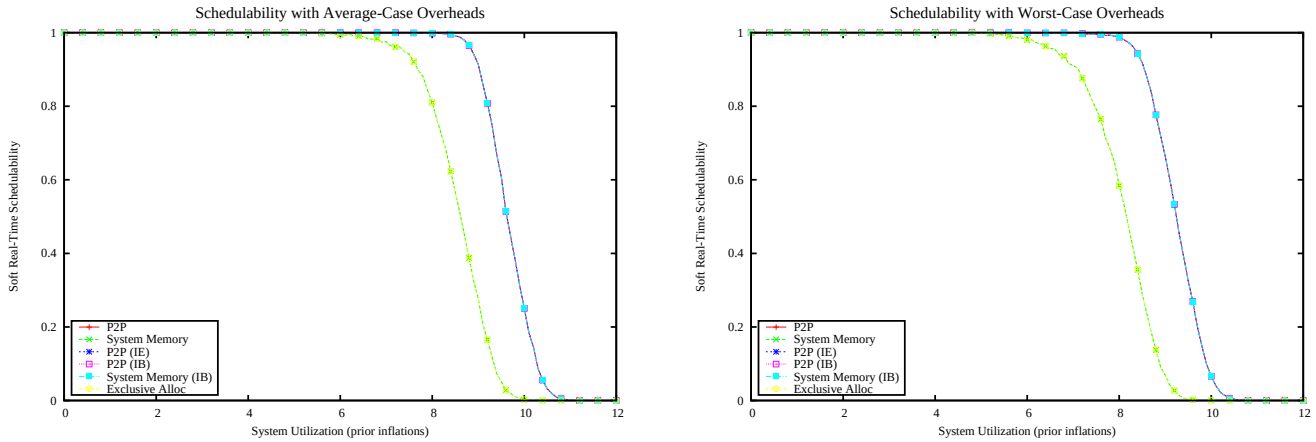

Figure 4526: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

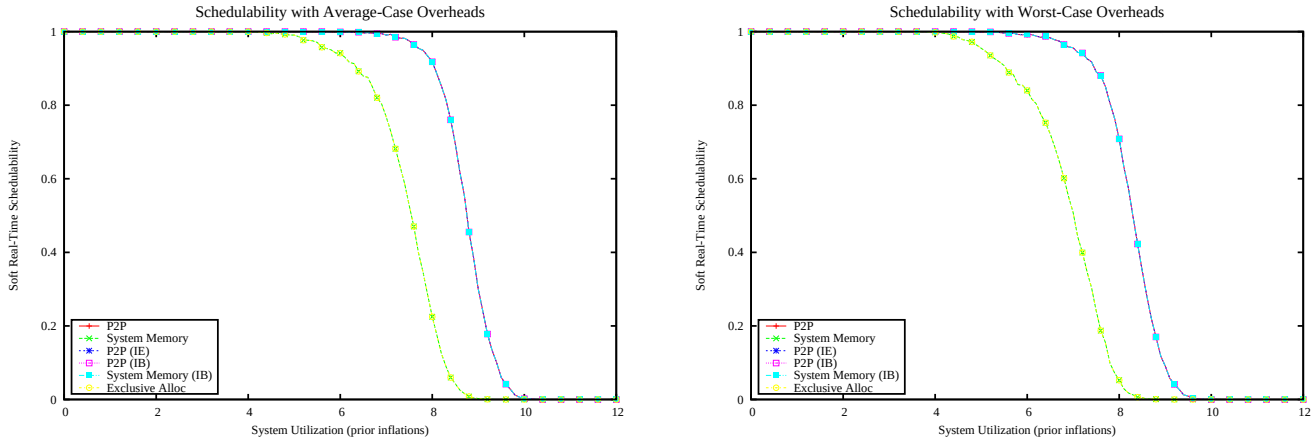

Figure 4527: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

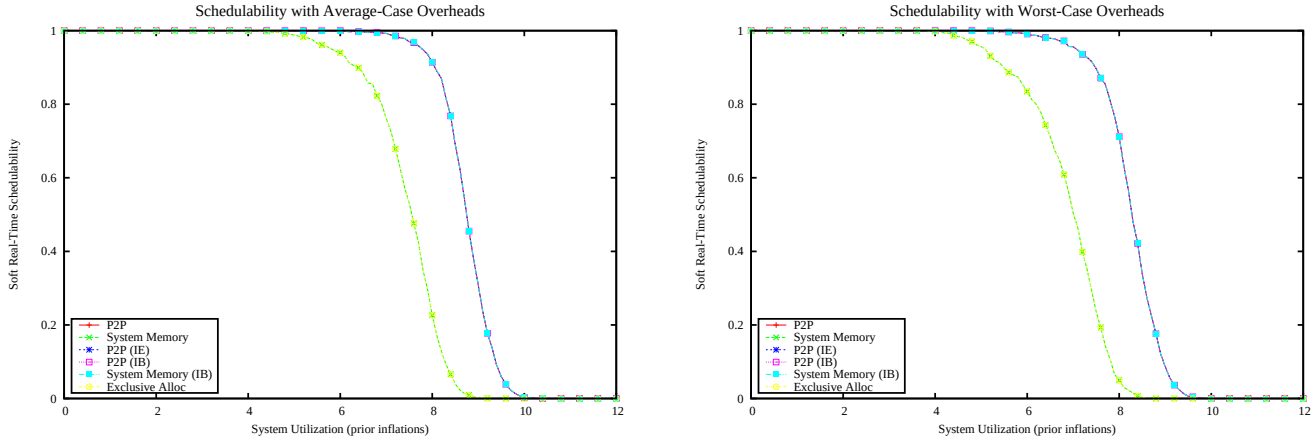

Figure 4528: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

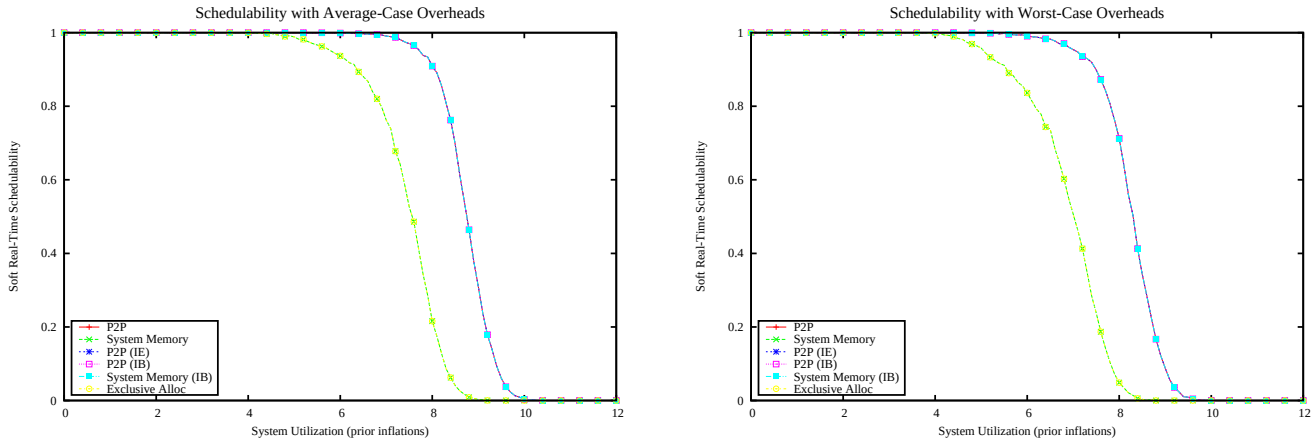

Figure 4529: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

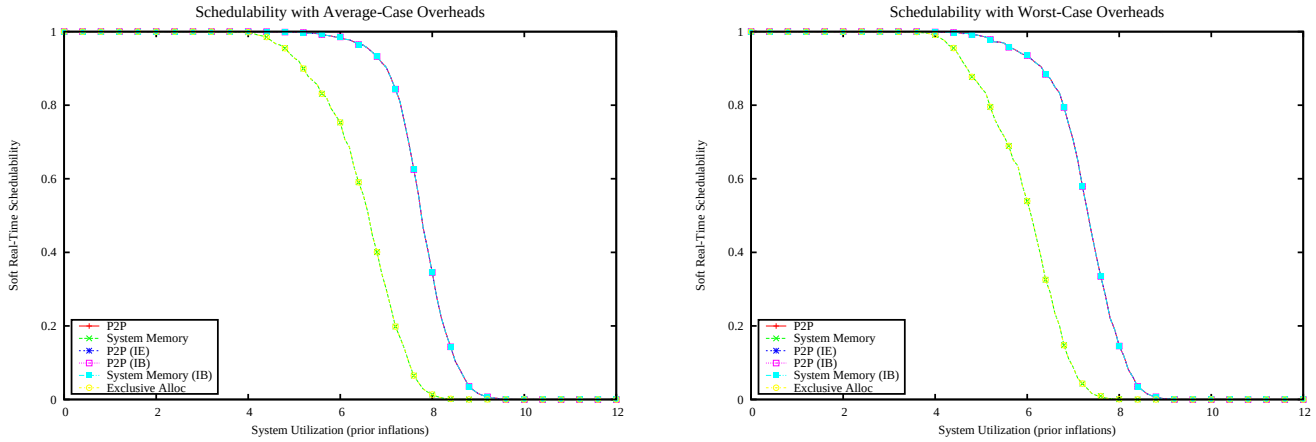

Figure 4530: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

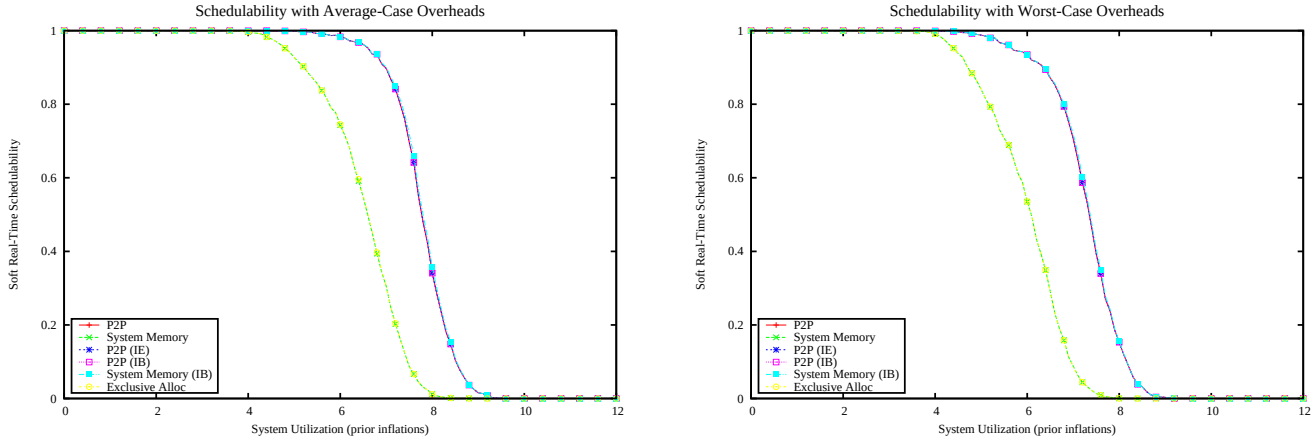

Figure 4531: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

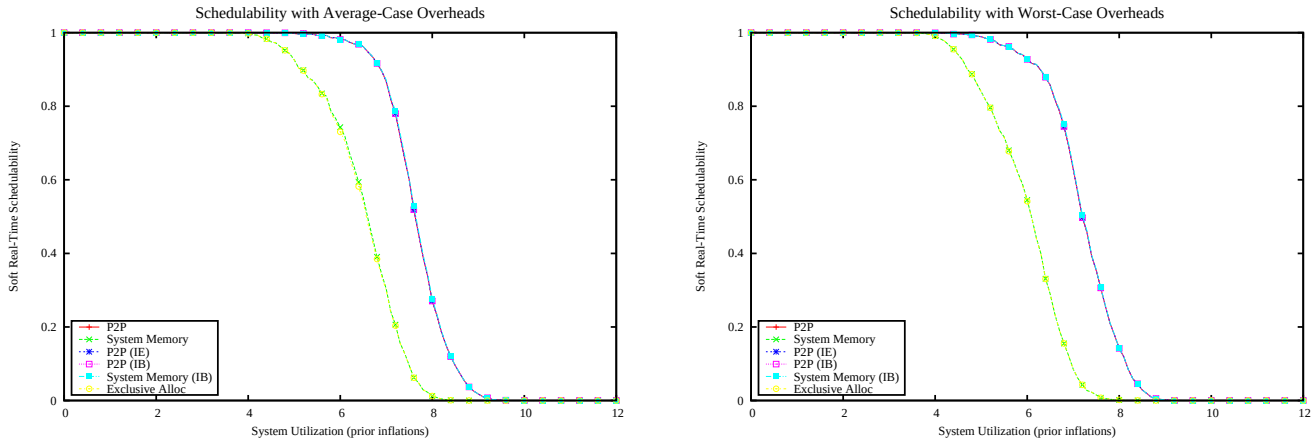

Figure 4532: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

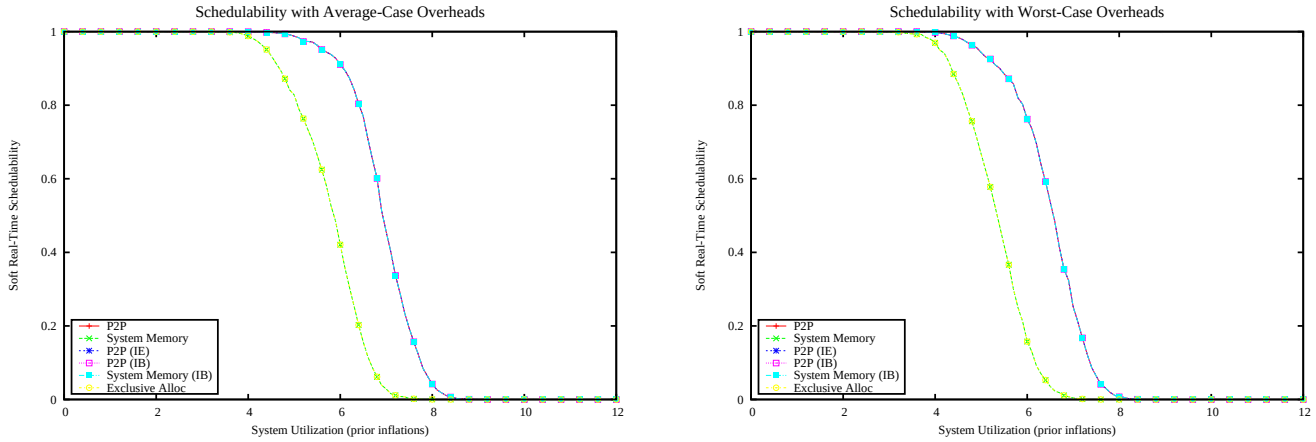

Figure 4533: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

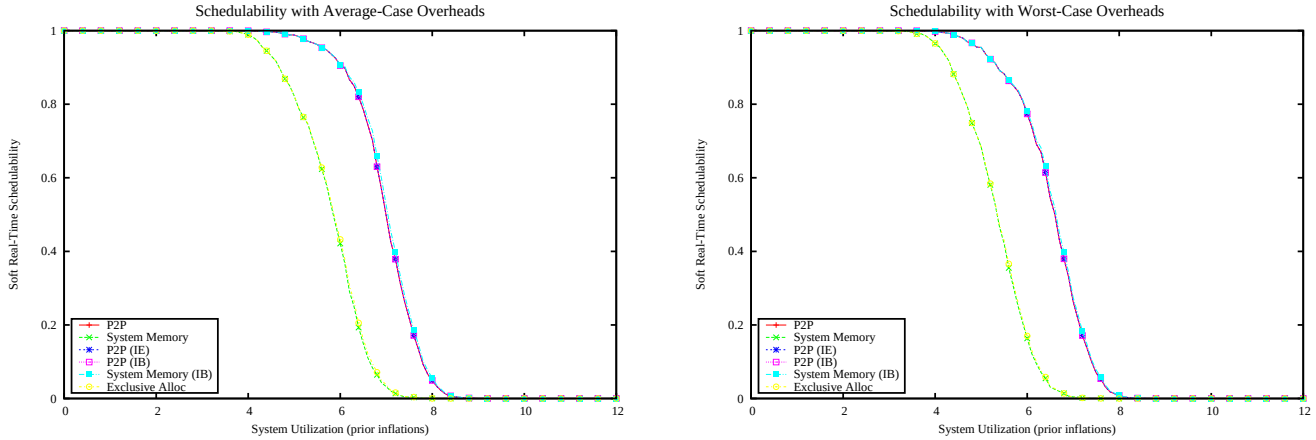

Figure 4534: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

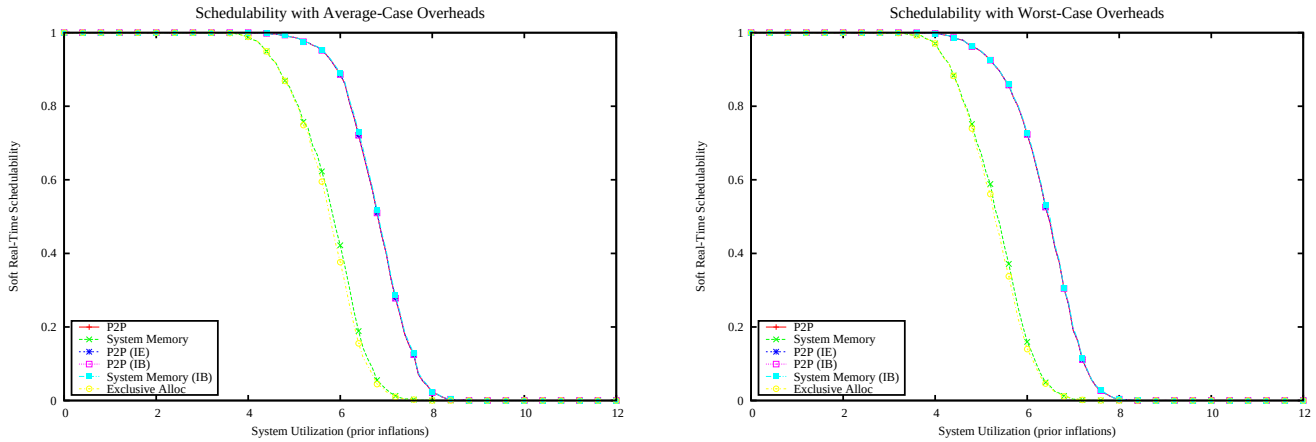

Figure 4535: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

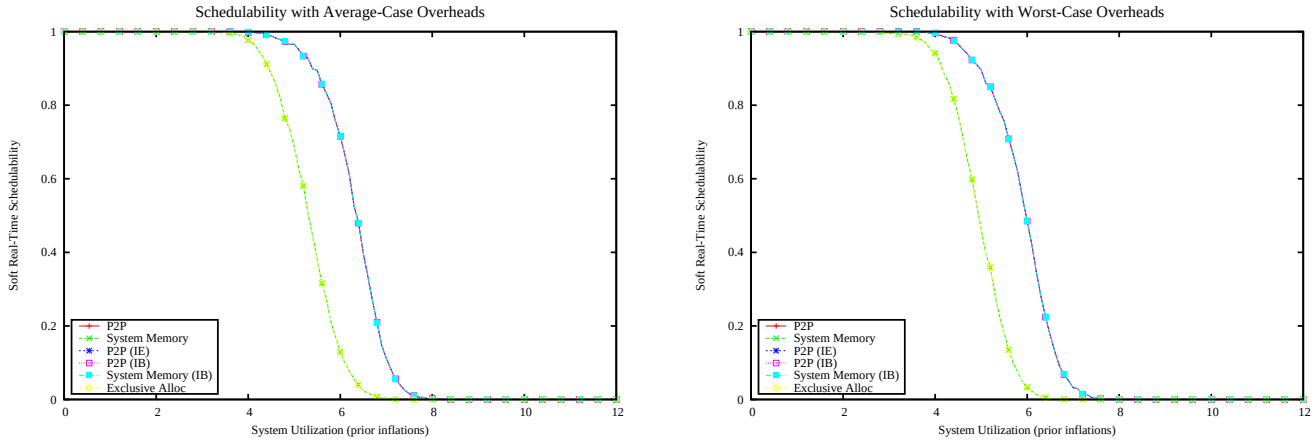

Figure 4536: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

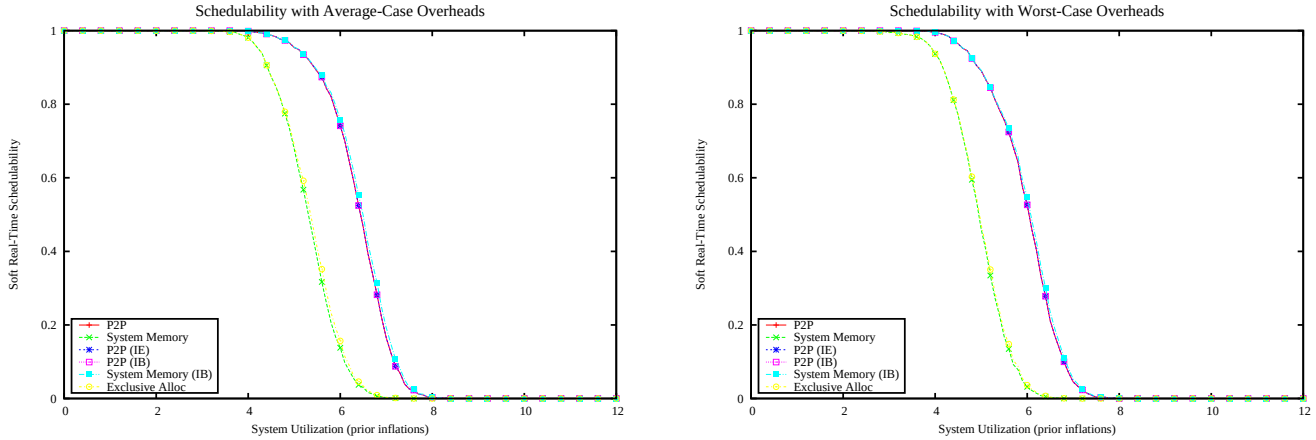

Figure 4537: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

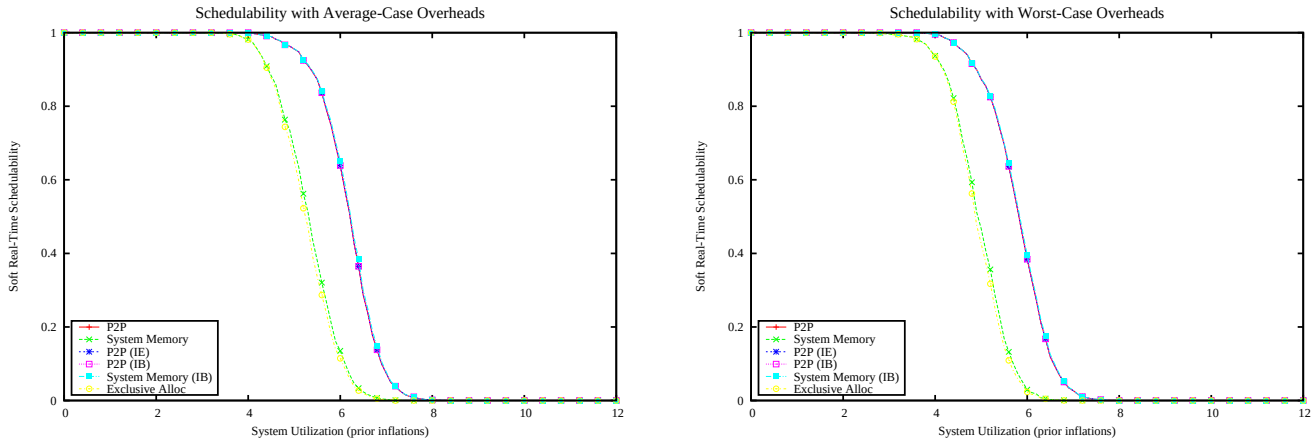

Figure 4538: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

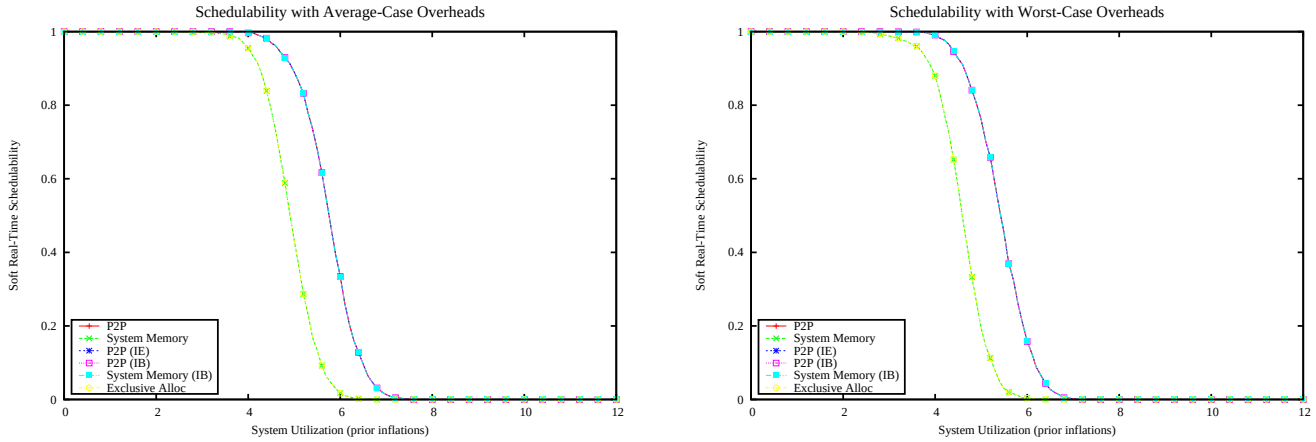

Figure 4539: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

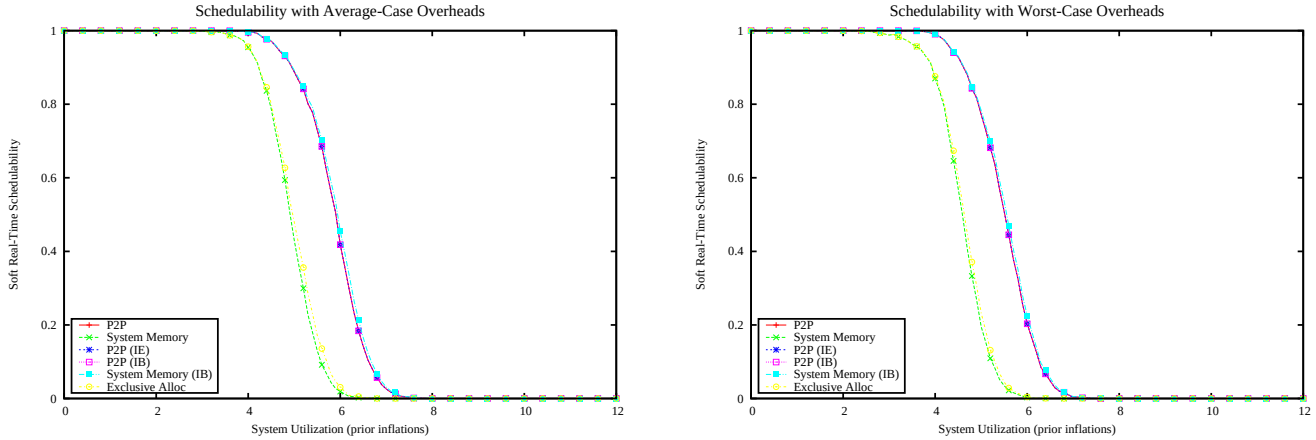

Figure 4540: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

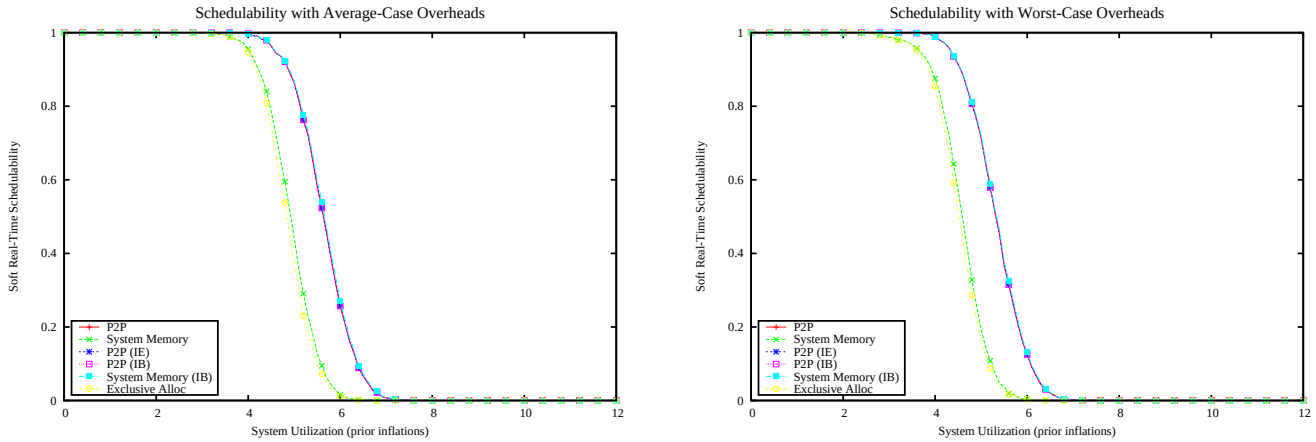

Figure 4541: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

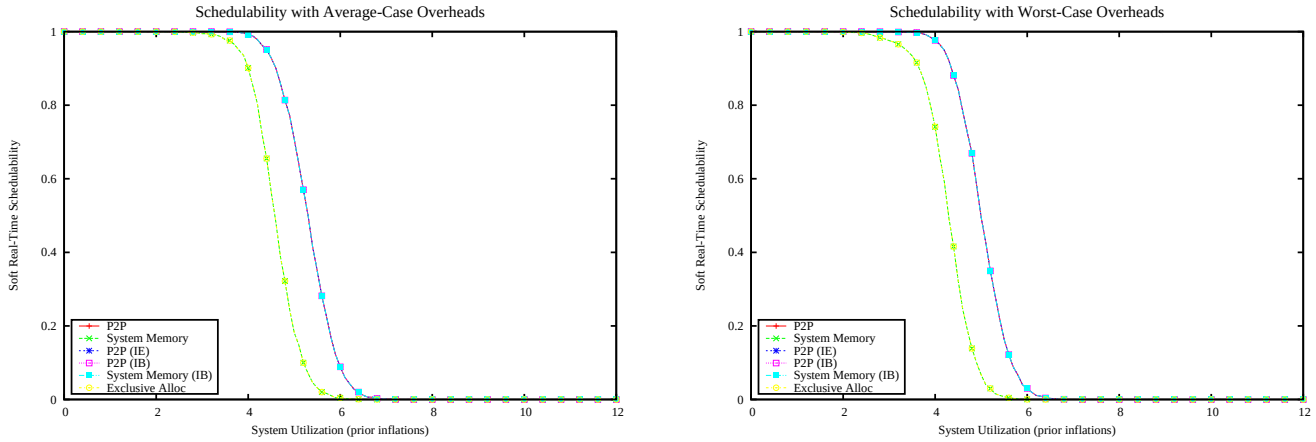

Figure 4542: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

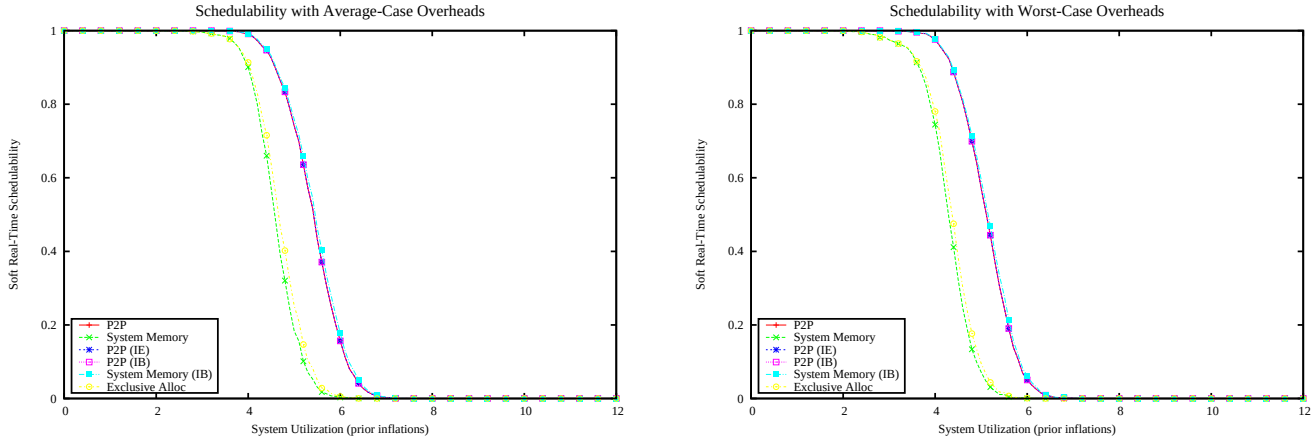

Figure 4543: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

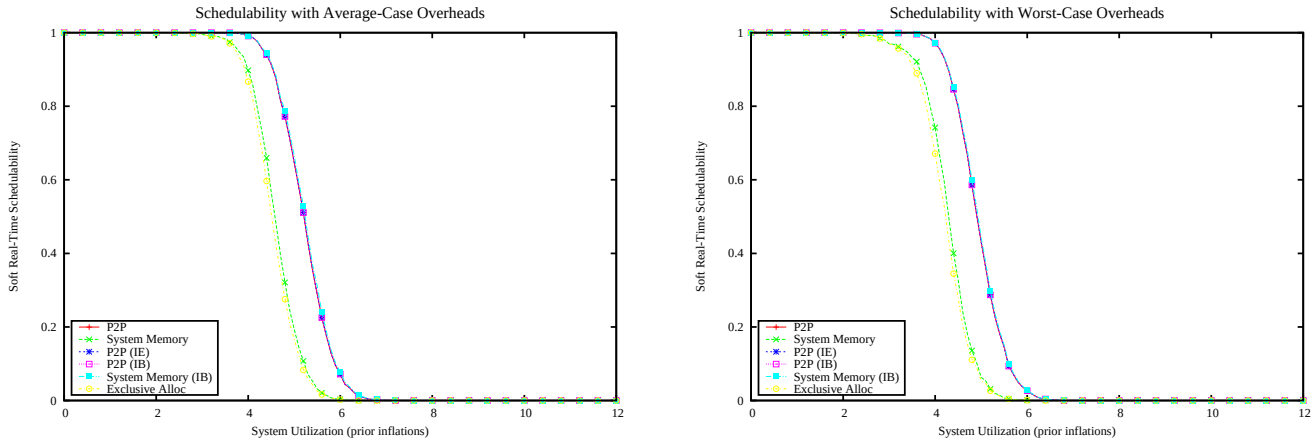

Figure 4544: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

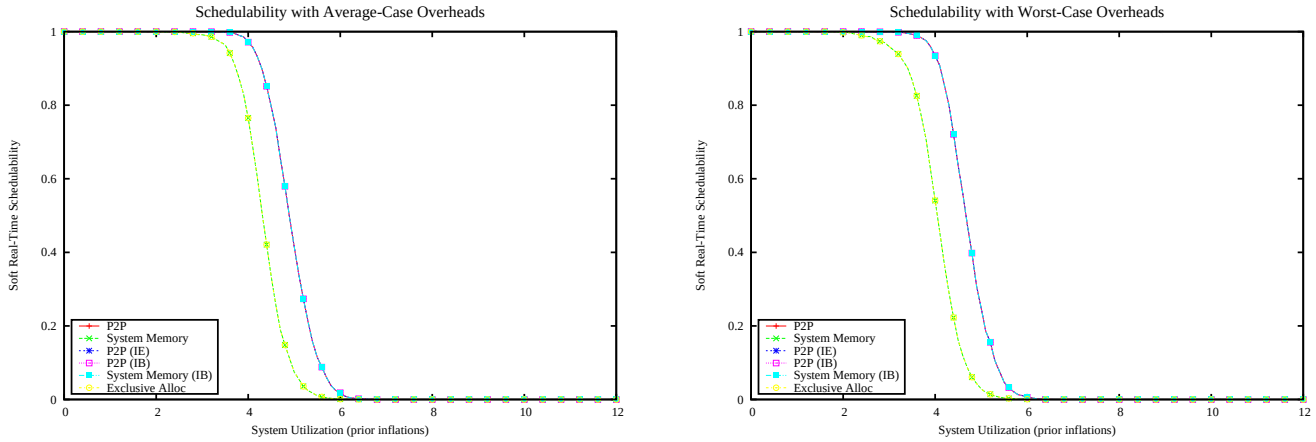

Figure 4545: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

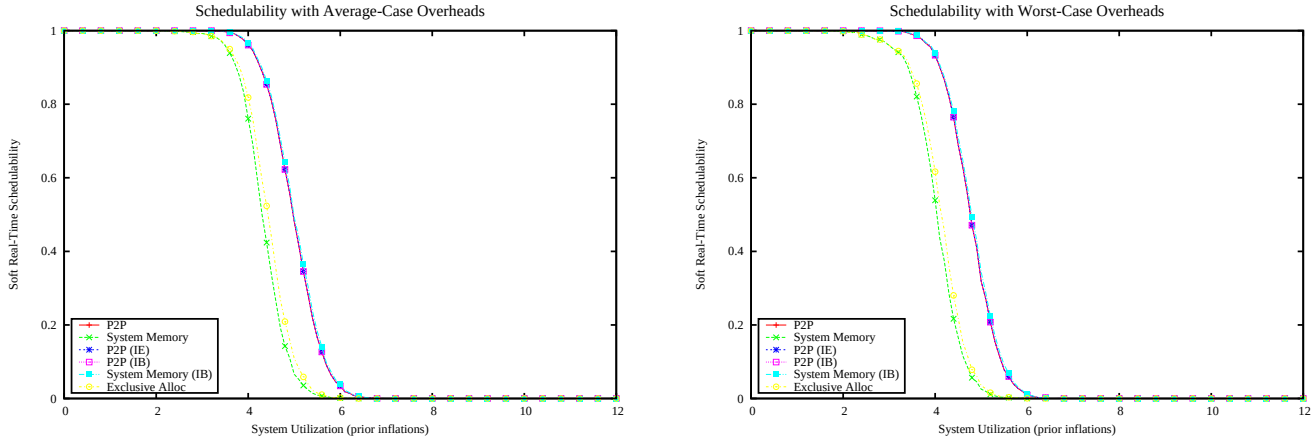

Figure 4546: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

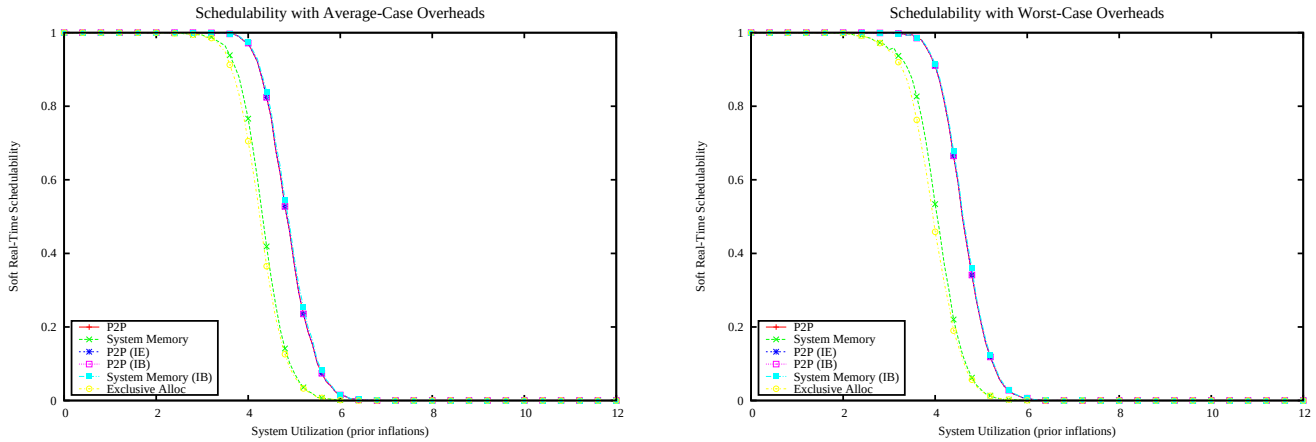

Figure 4547: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

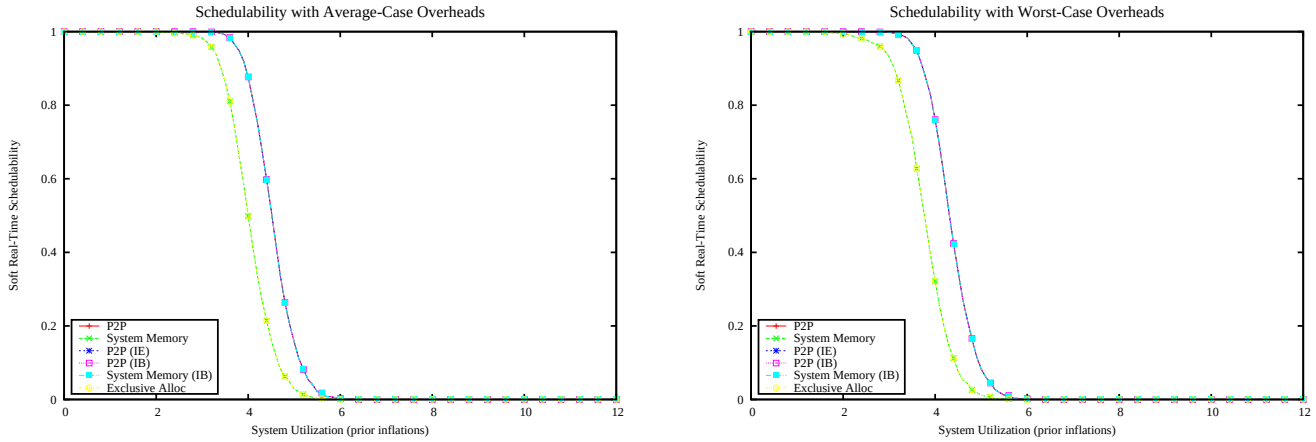

Figure 4548: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

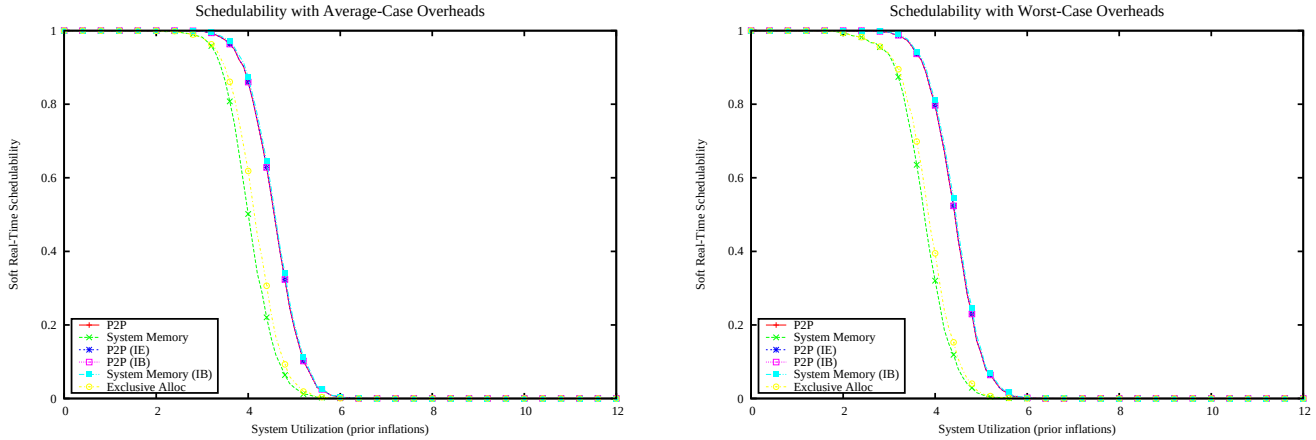

Figure 4549: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

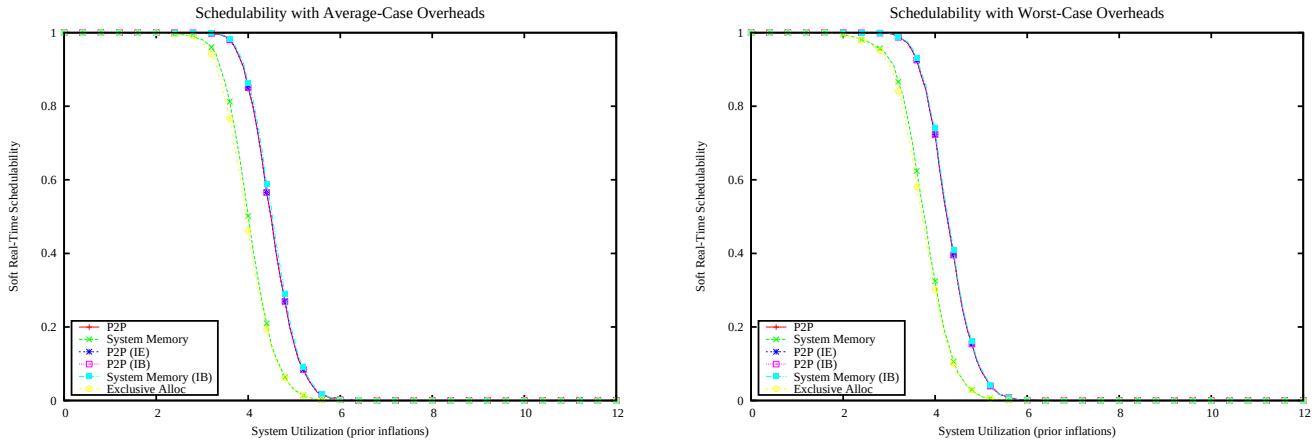

Figure 4550: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

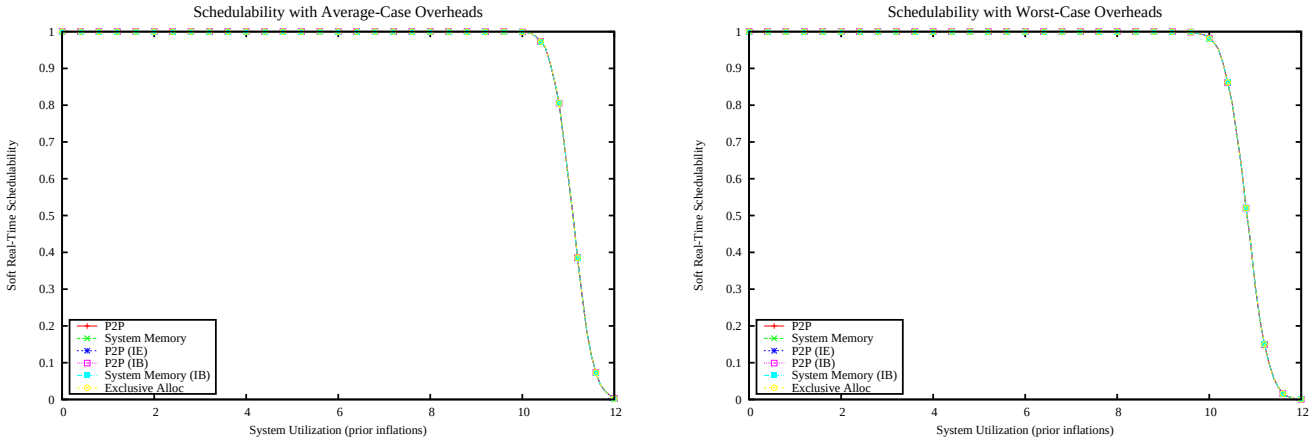

Figure 4551: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

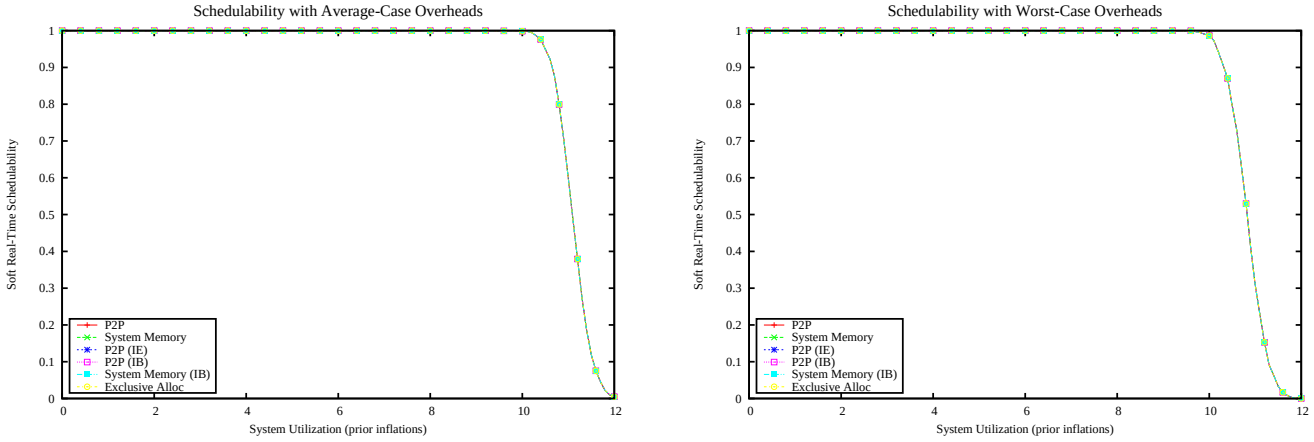

Figure 4552: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

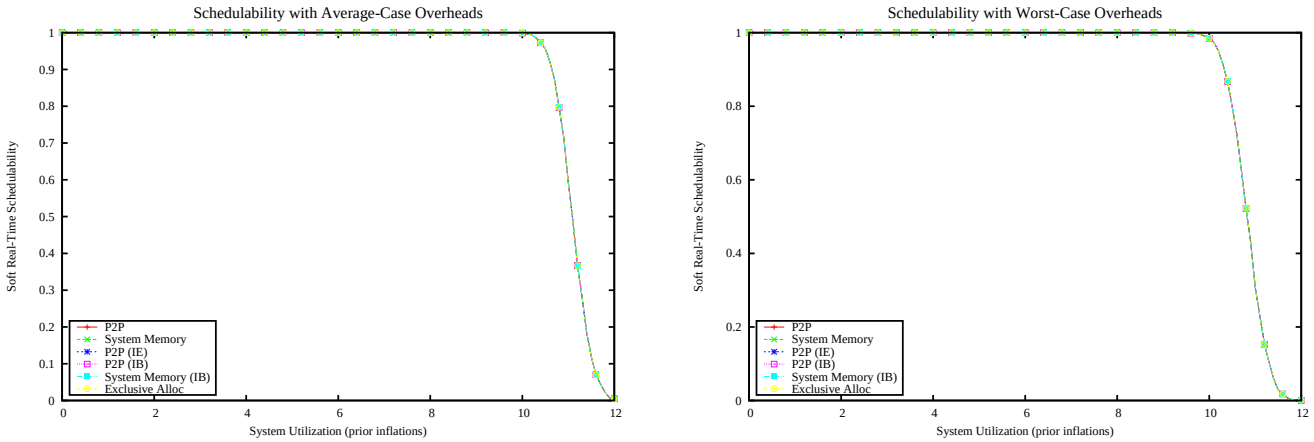

Figure 4553: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

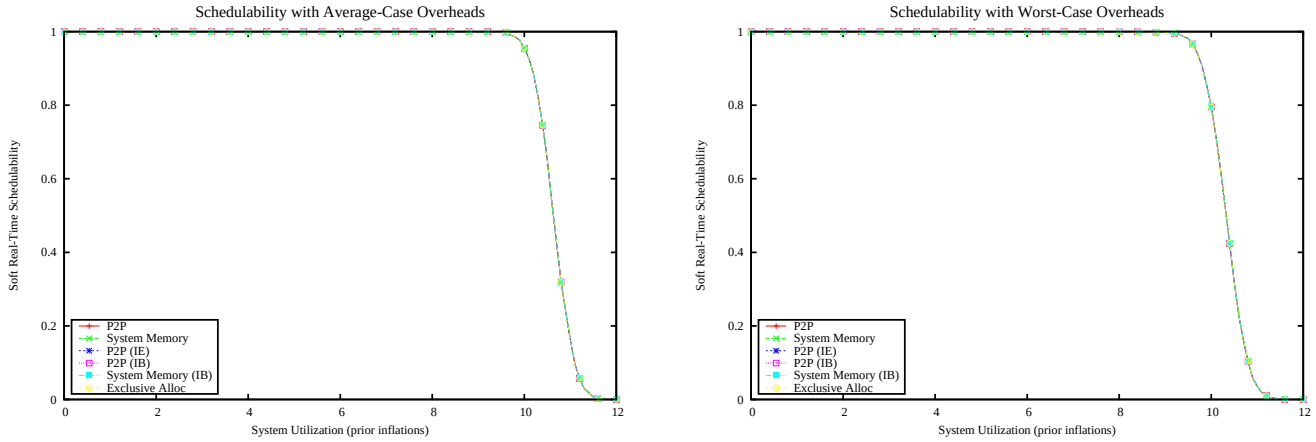

Figure 4554: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

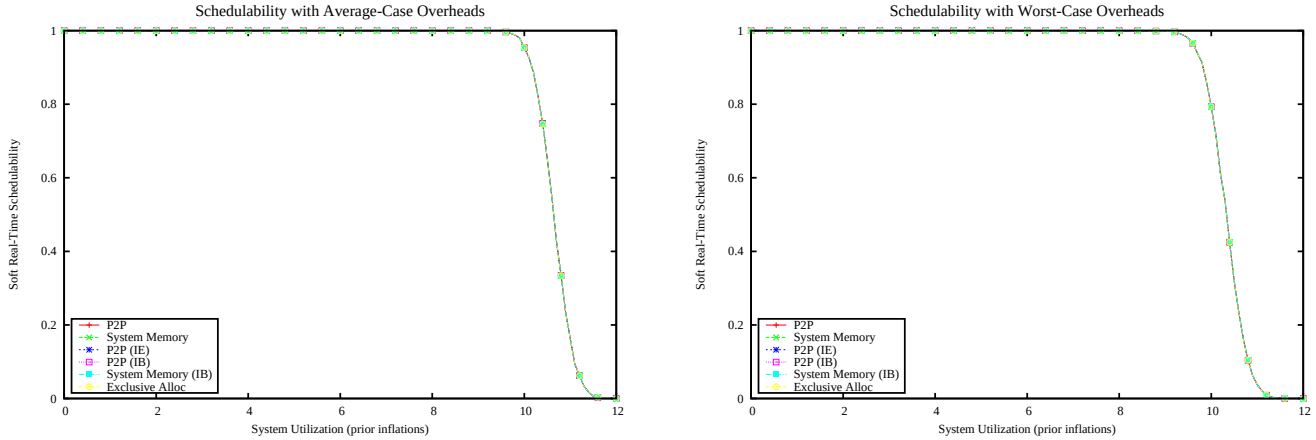

Figure 4555: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

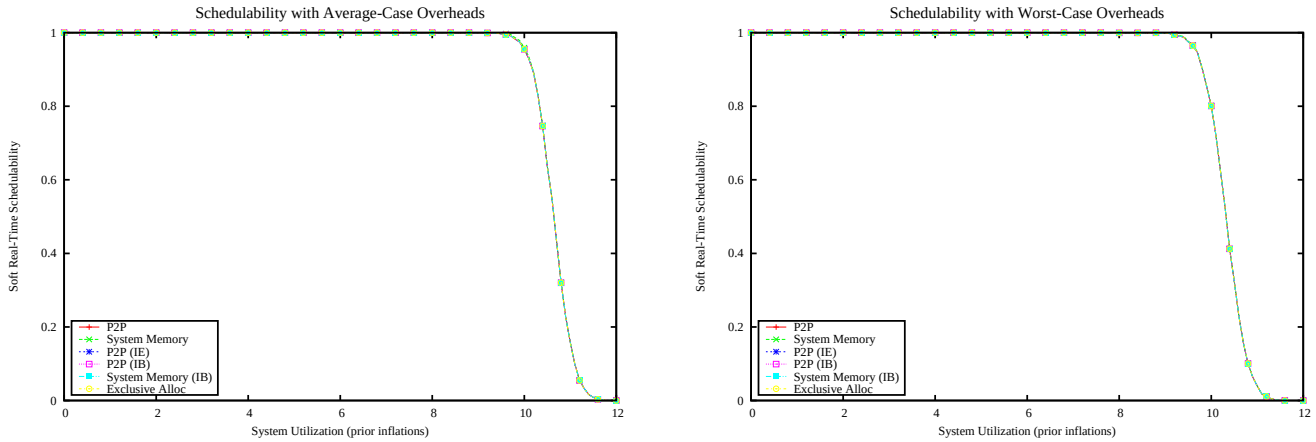

Figure 4556: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

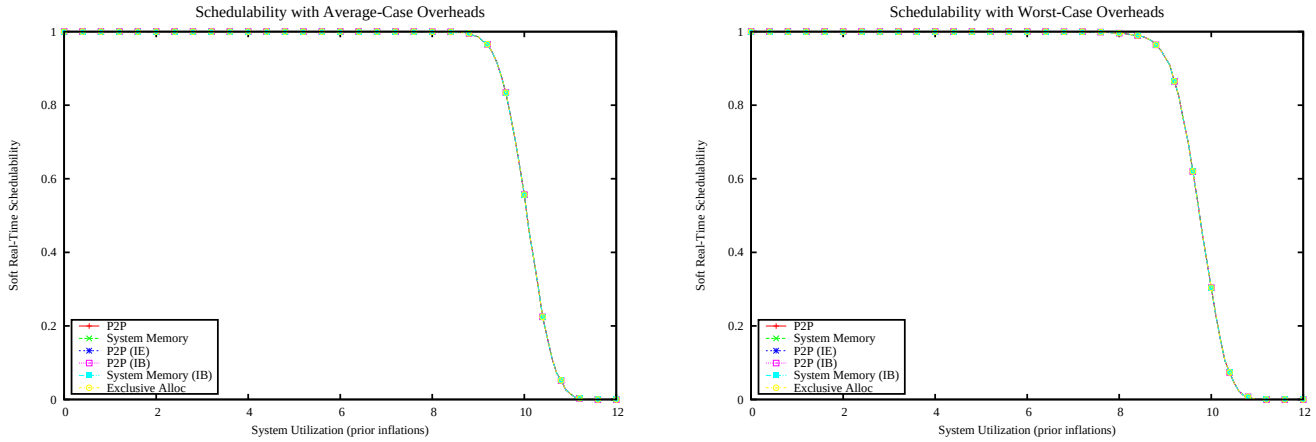

Figure 4557: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

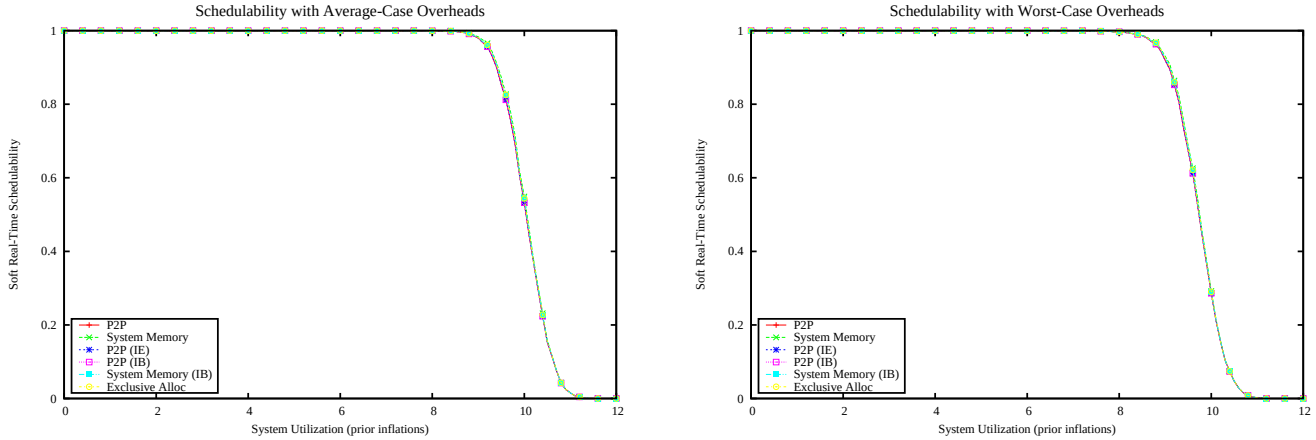

Figure 4558: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

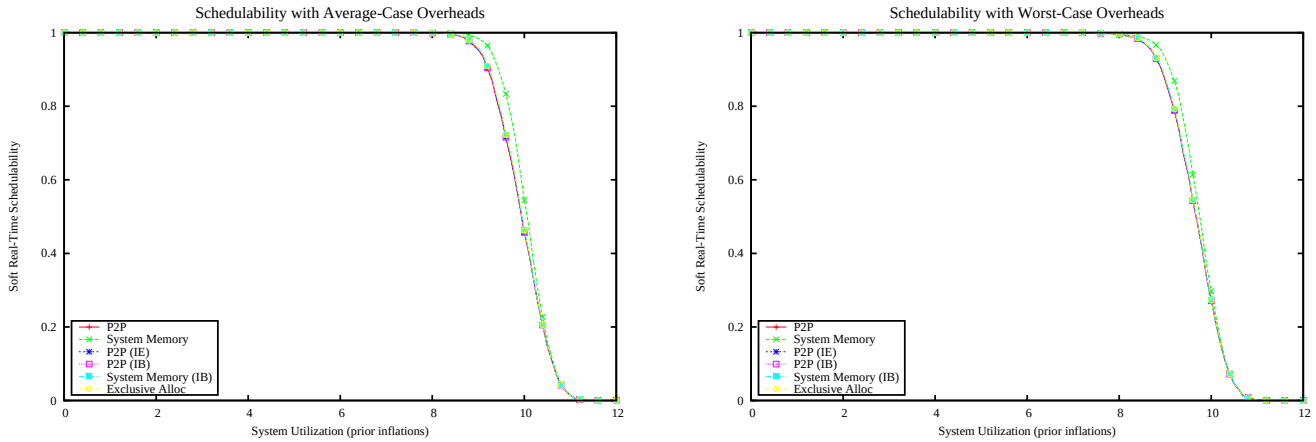

Figure 4559: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

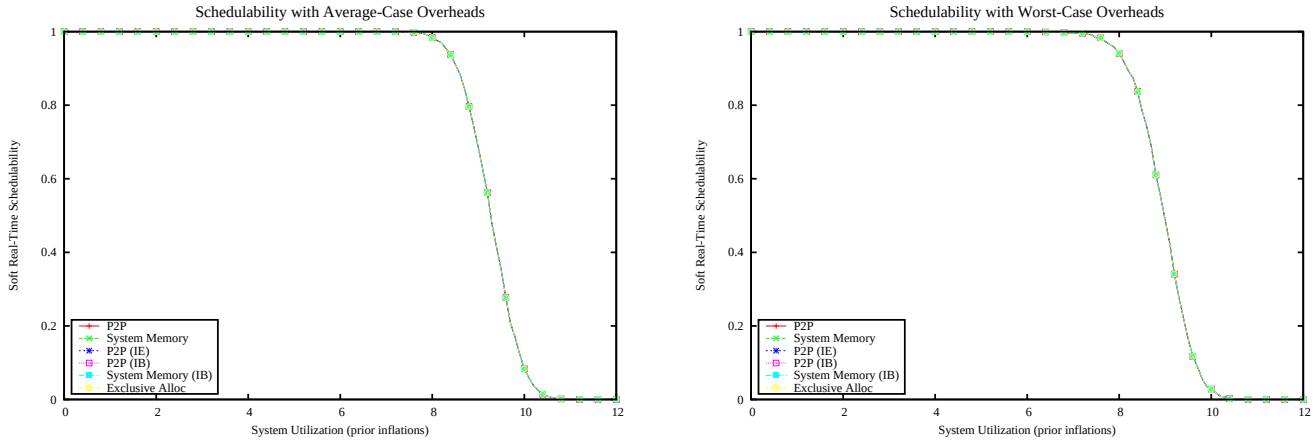

Figure 4560: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

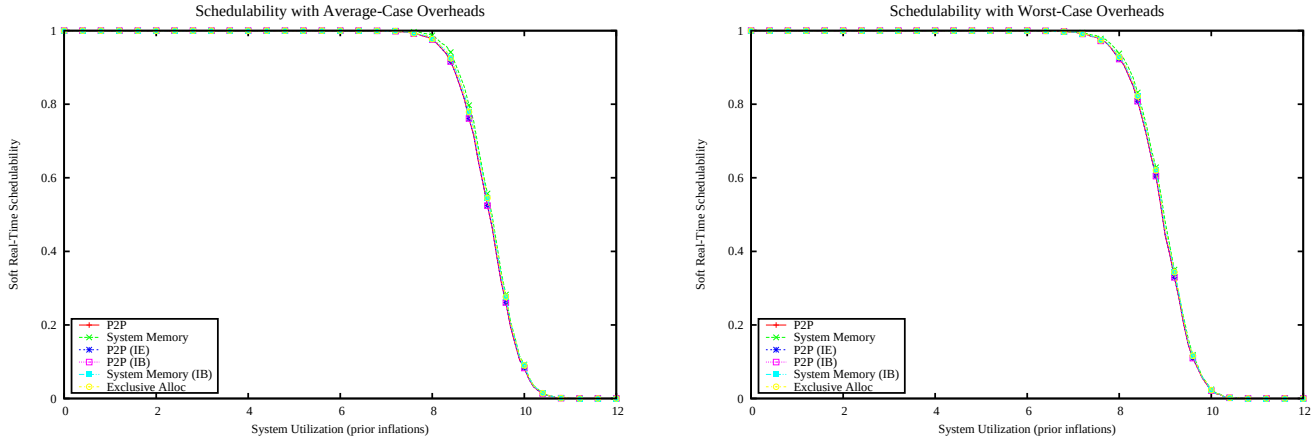

Figure 4561: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

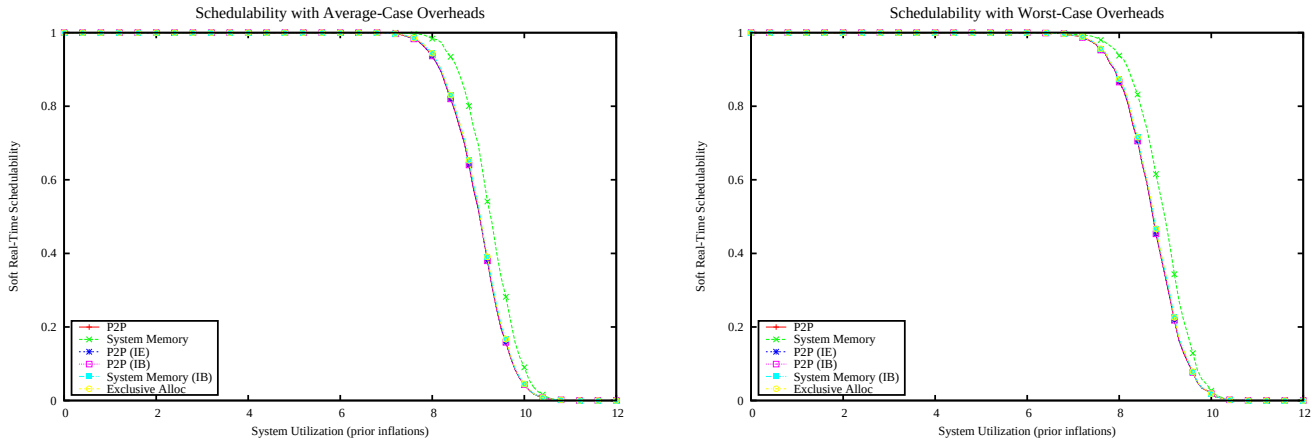

Figure 4562: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

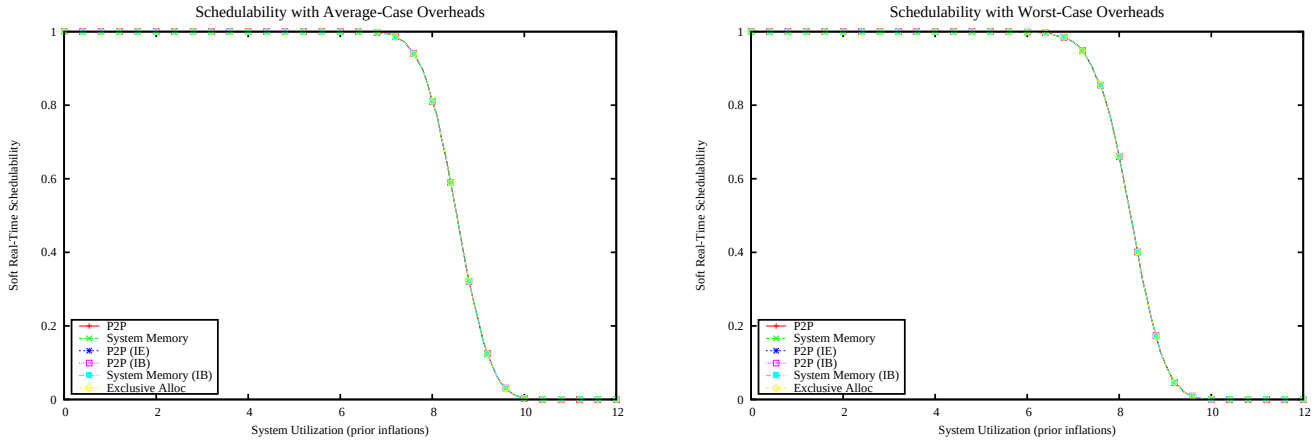

Figure 4563: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

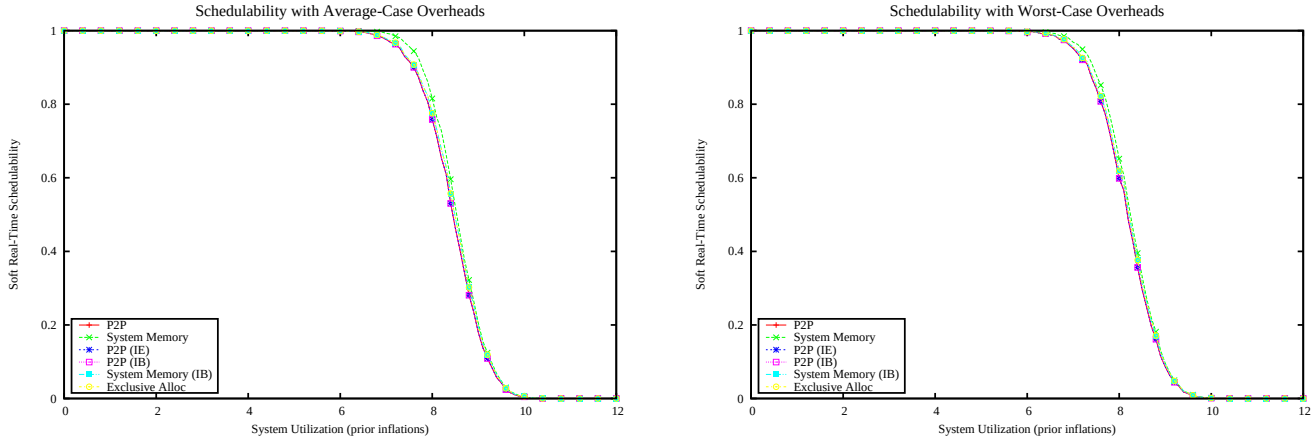

Figure 4564: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

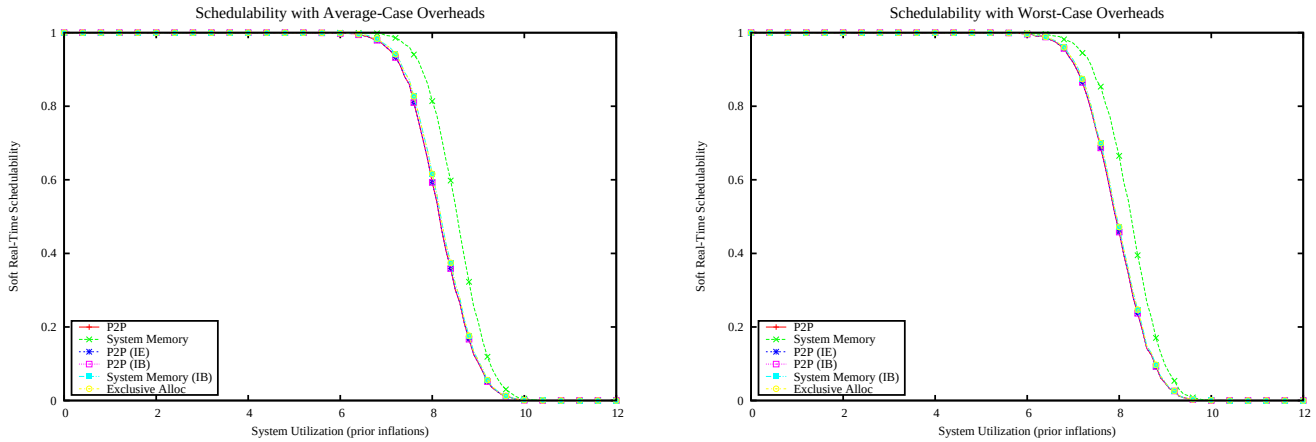

Figure 4565: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

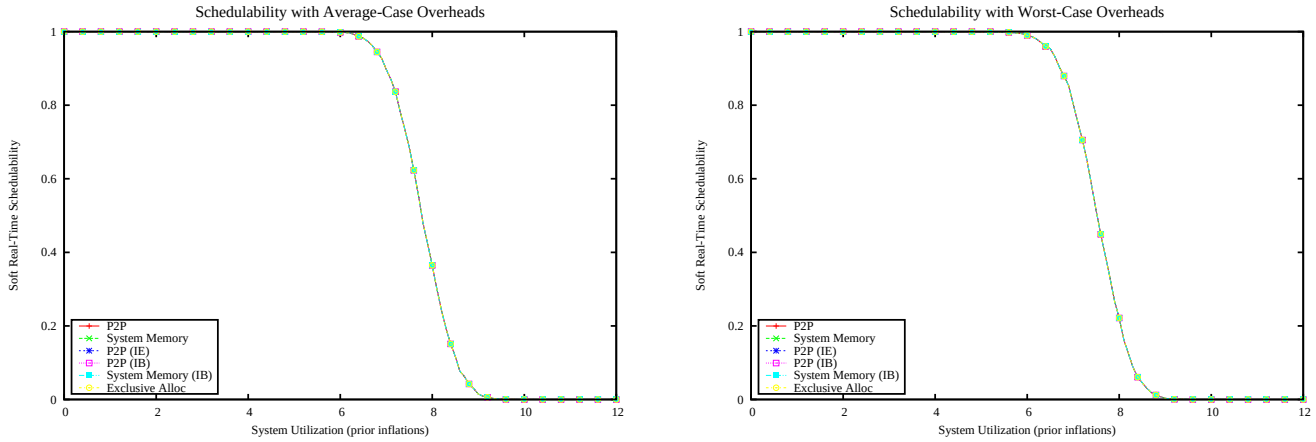

Figure 4566: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

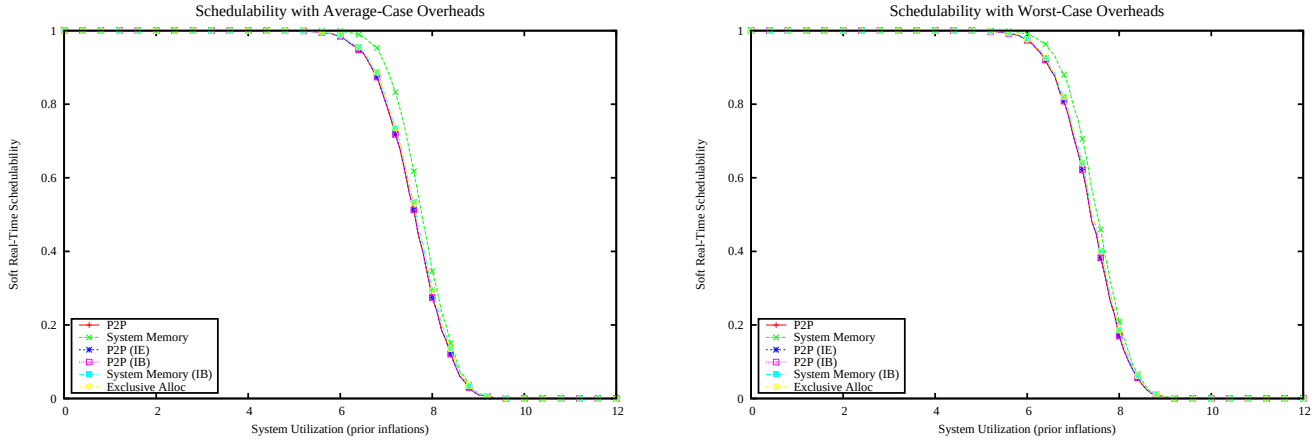

Figure 4567: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

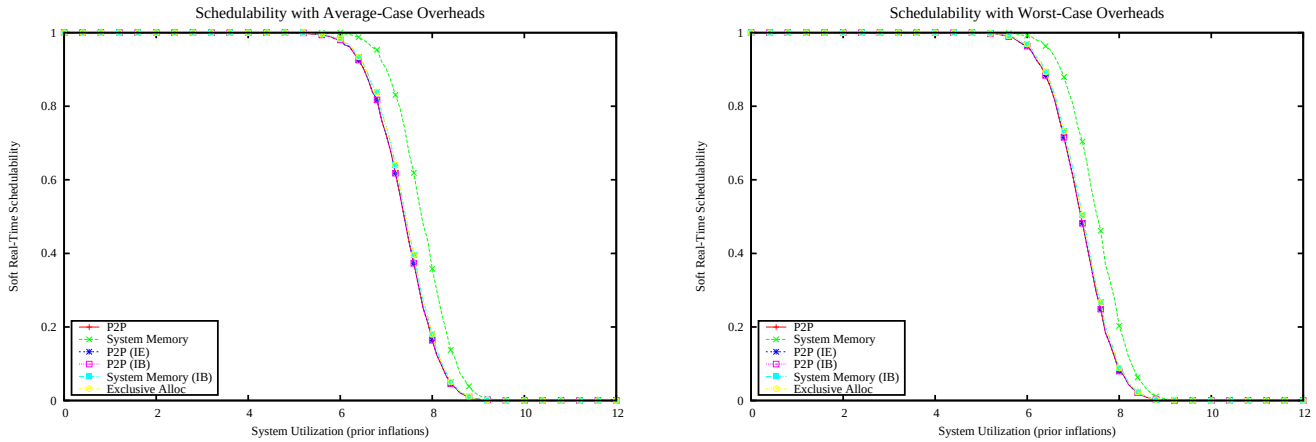

Figure 4568: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

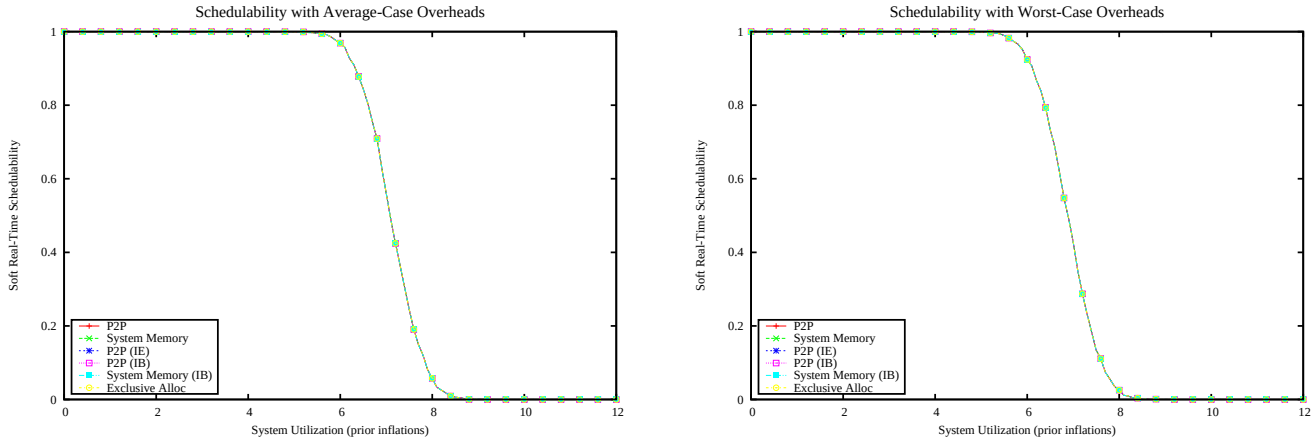

Figure 4569: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

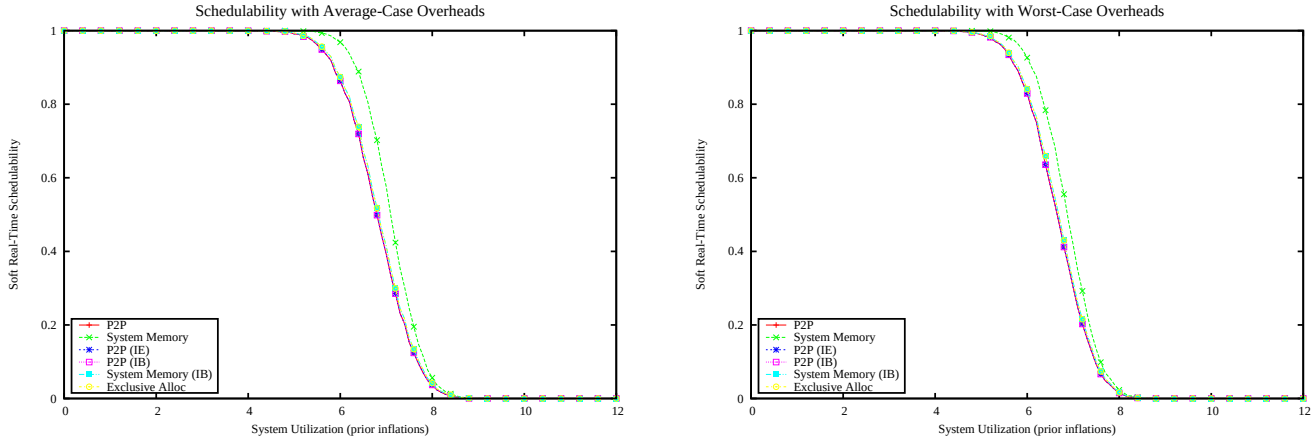

Figure 4570: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

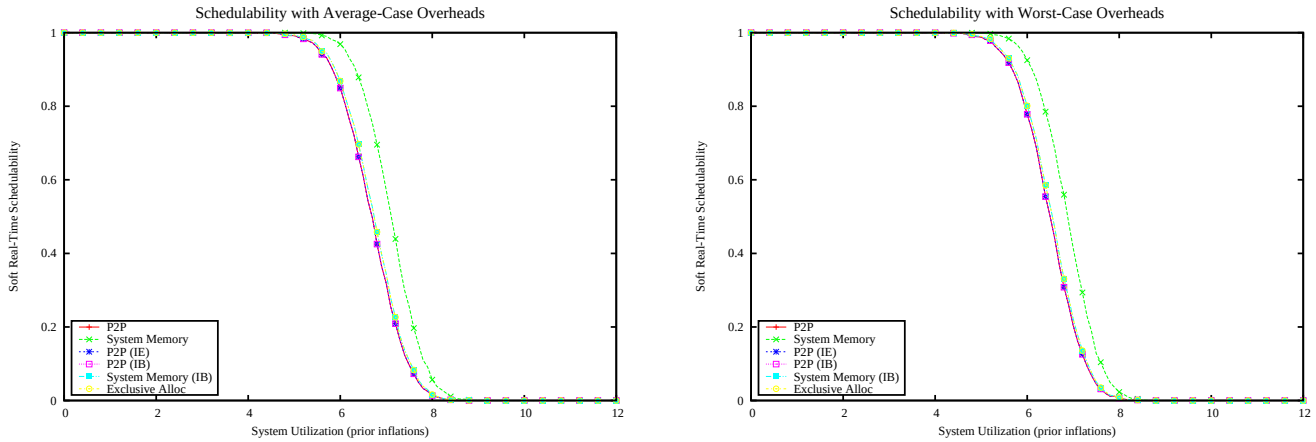

Figure 4571: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

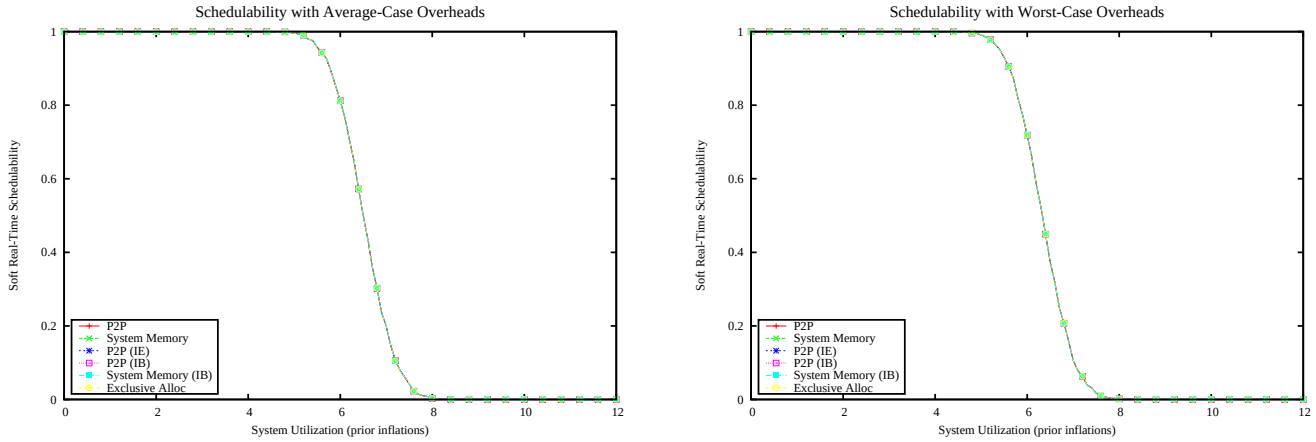

Figure 4572: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

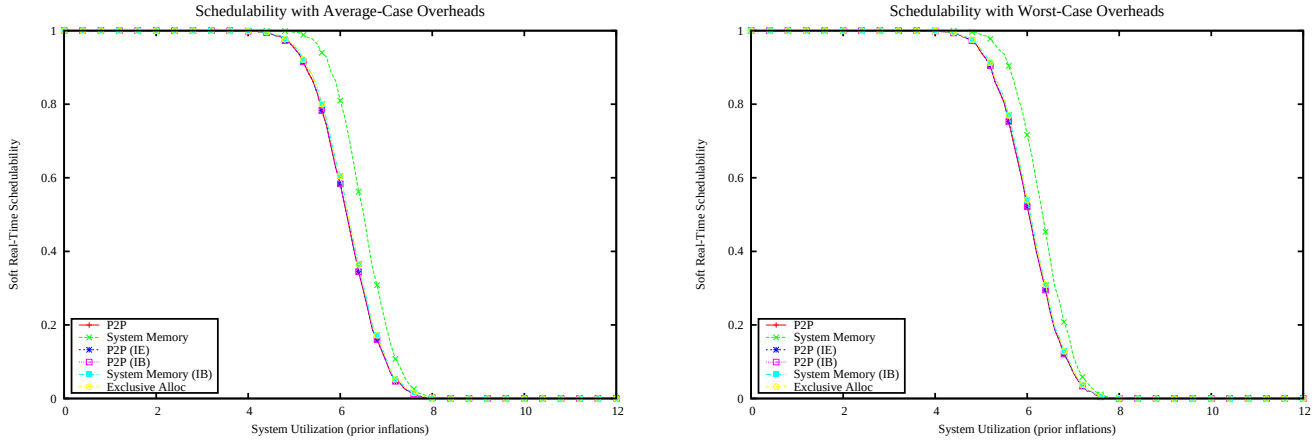

Figure 4573: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

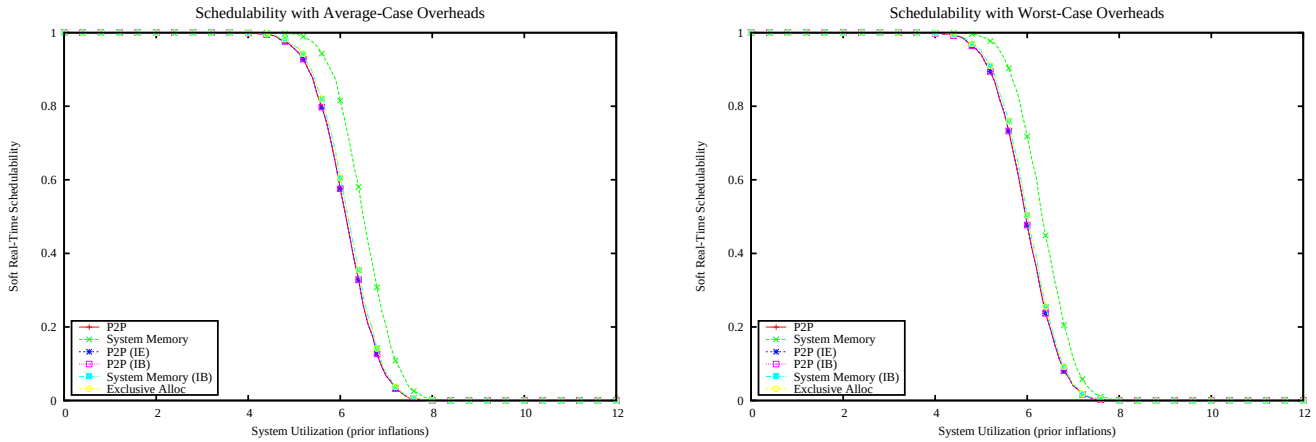

Figure 4574: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

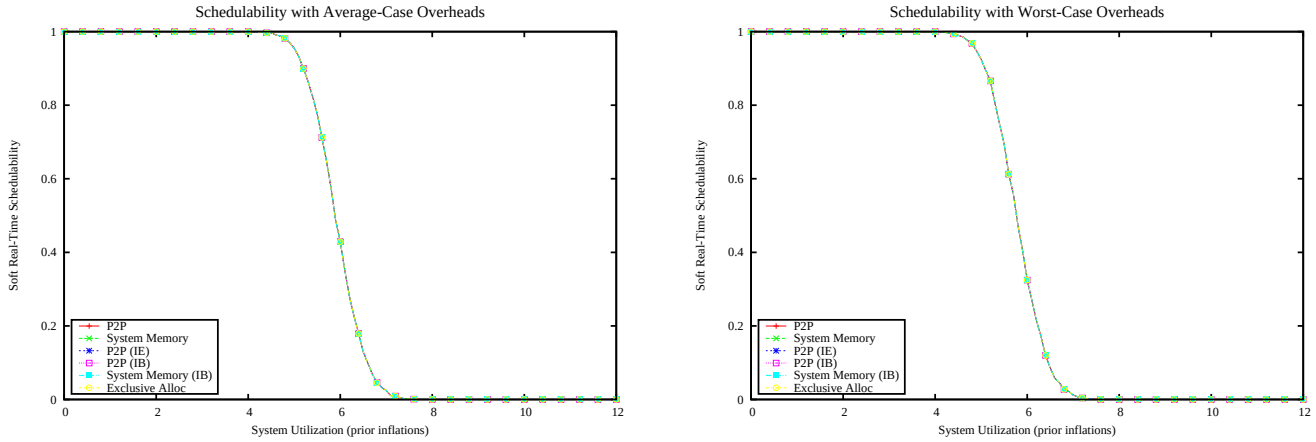

Figure 4575: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

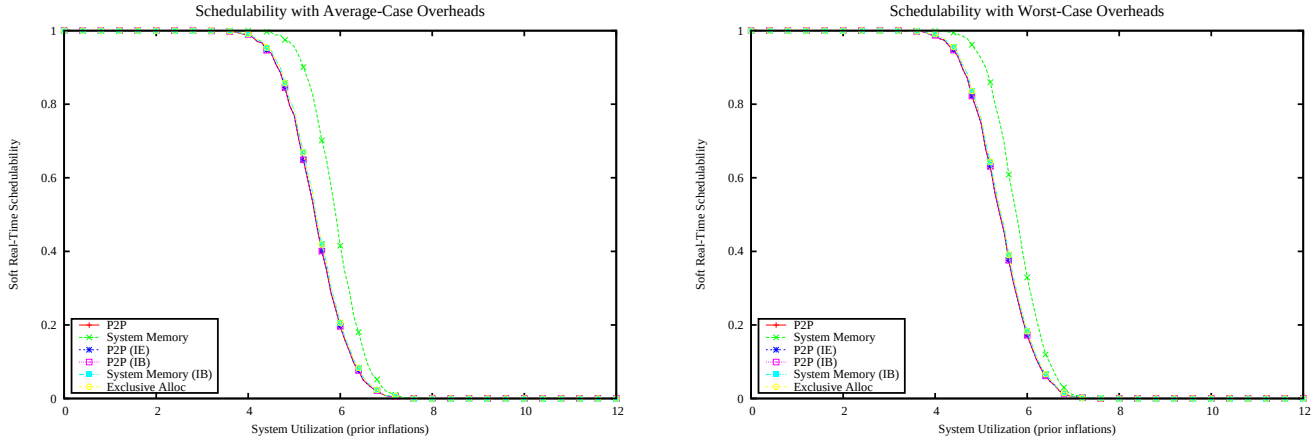

Figure 4576: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

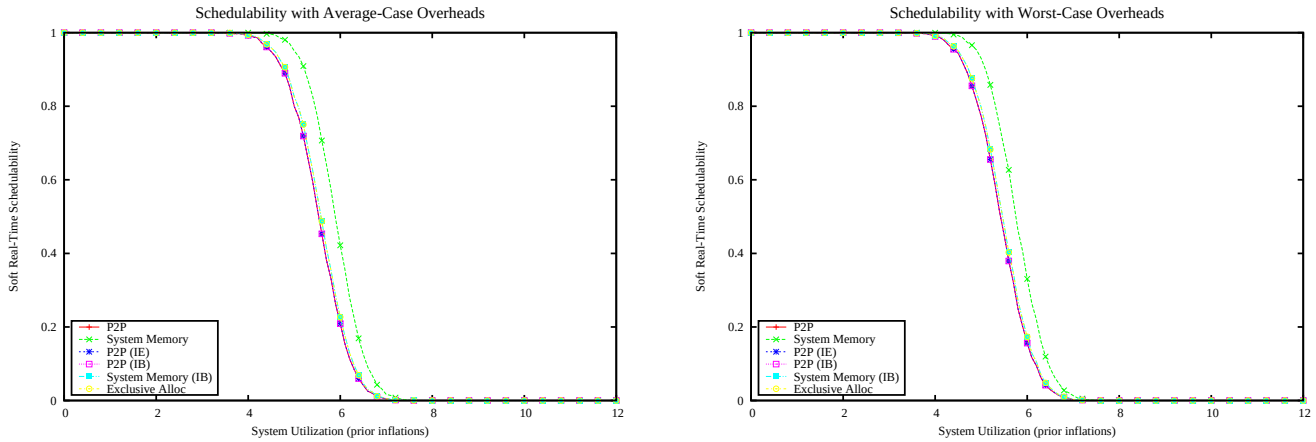

Figure 4577: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

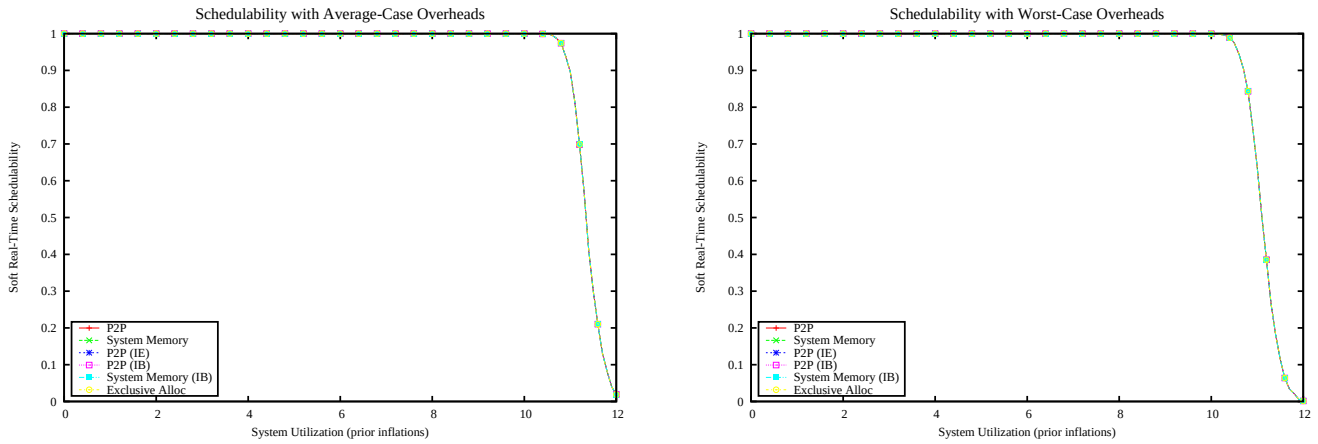

Figure 4578: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

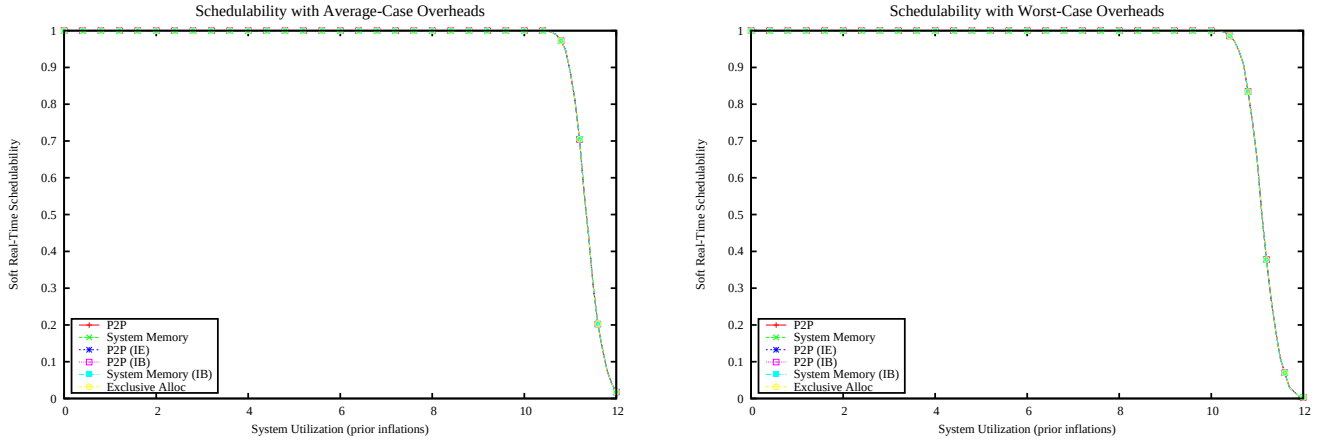

Figure 4579: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

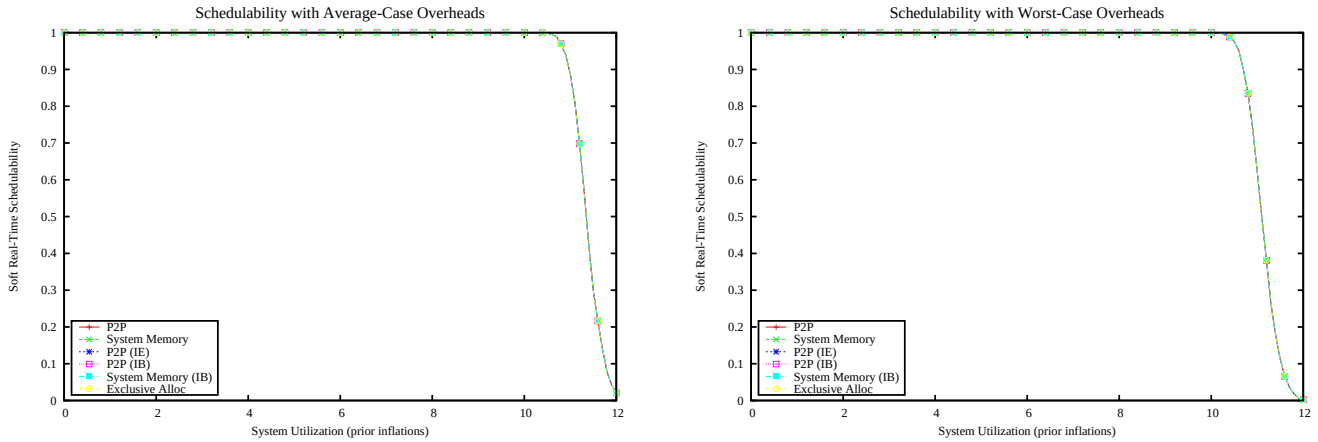

Figure 4580: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

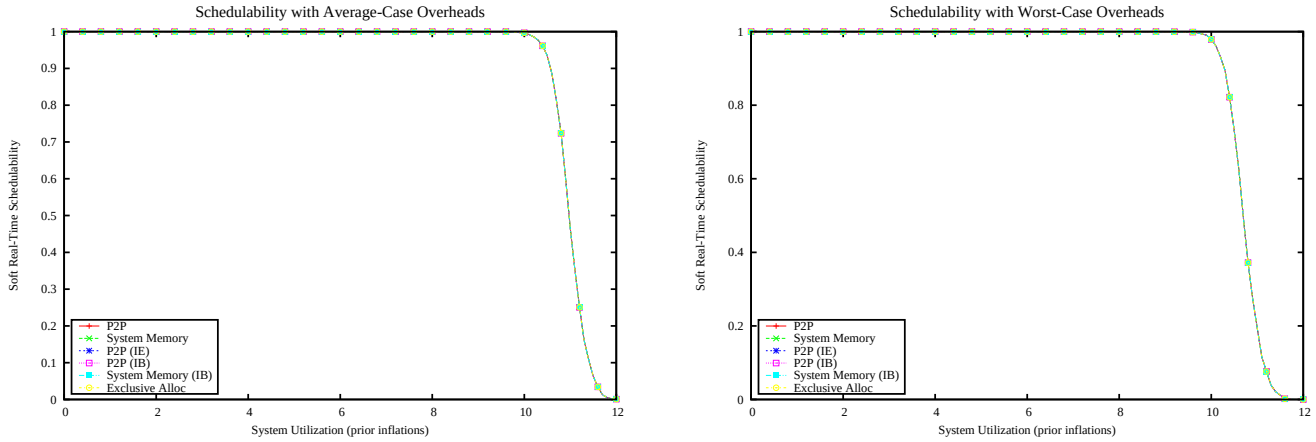

Figure 4581: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

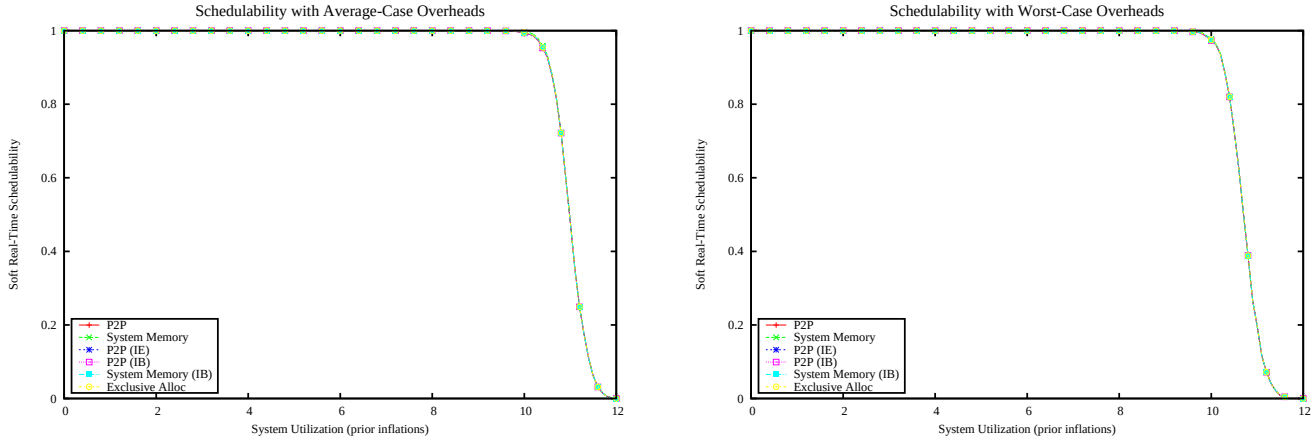

Figure 4582: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

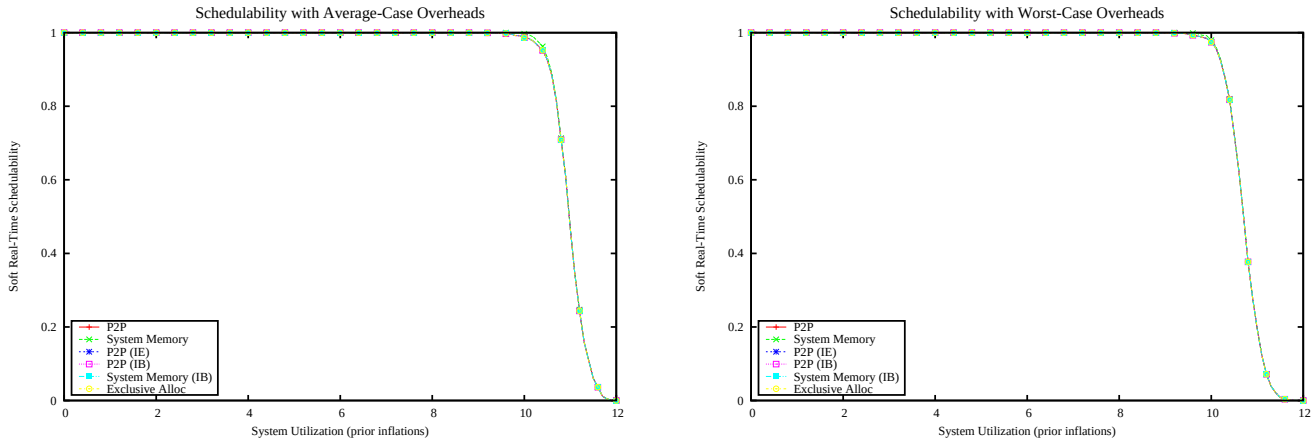

Figure 4583: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

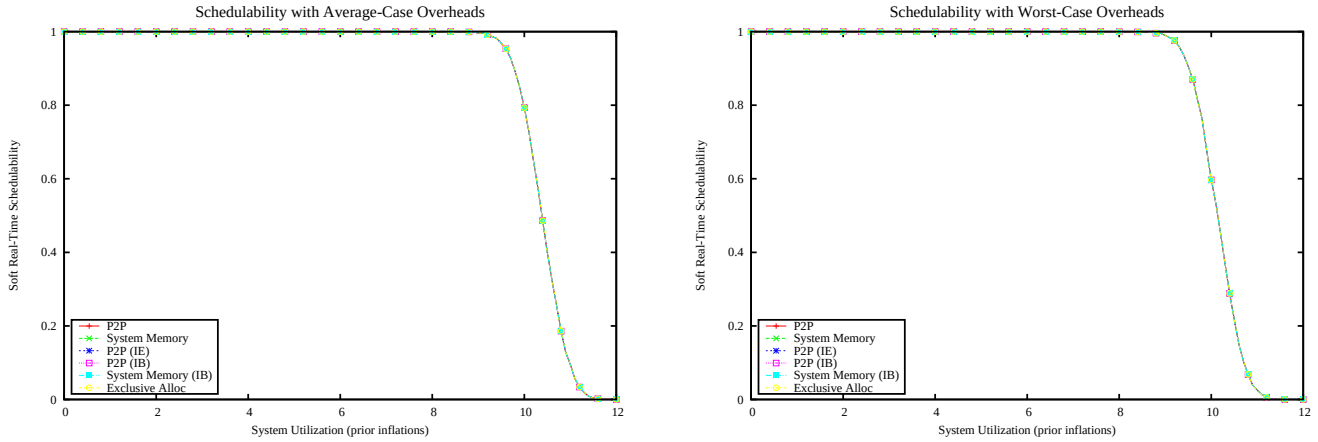

Figure 4584: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

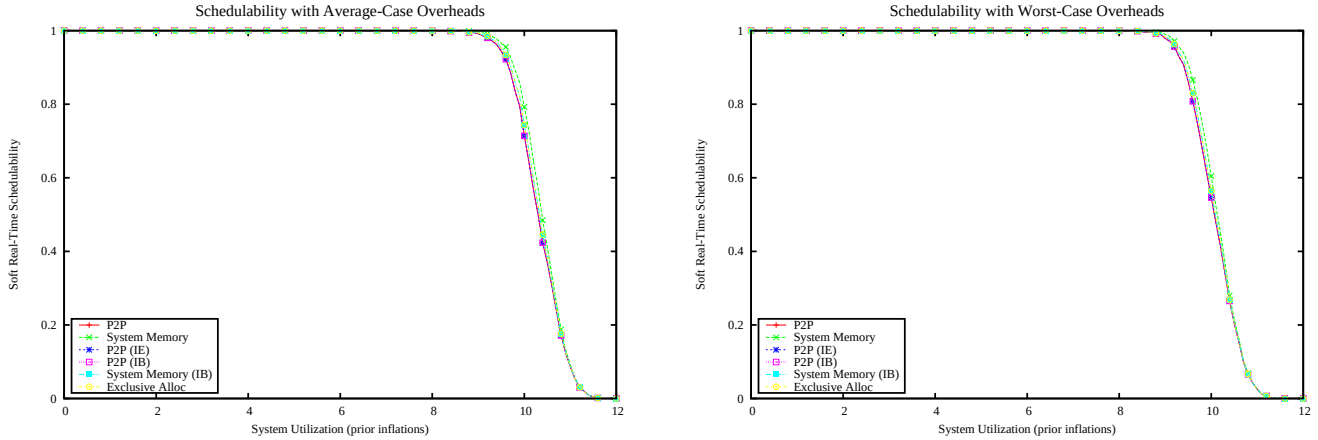

Figure 4585: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

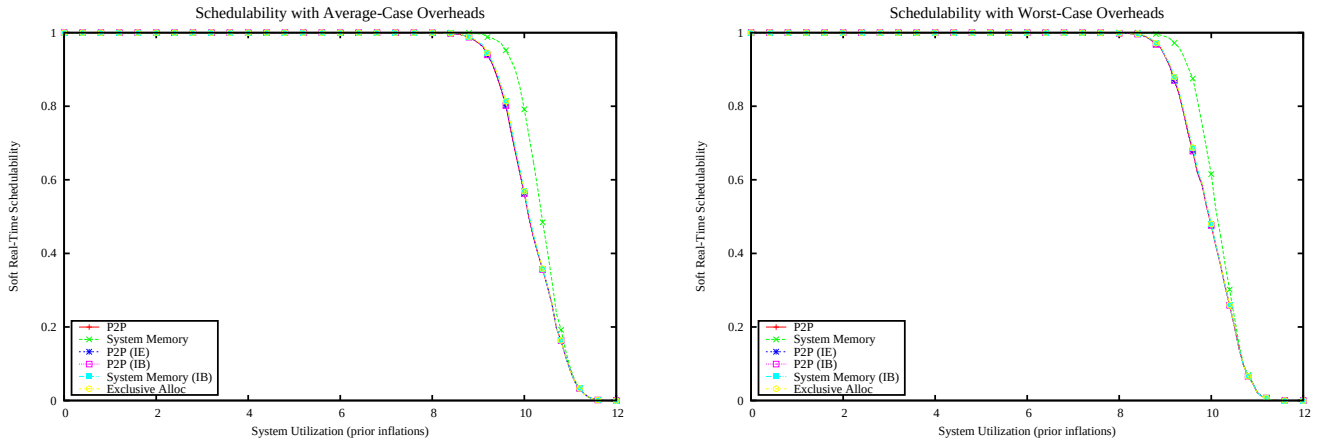

Figure 4586: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

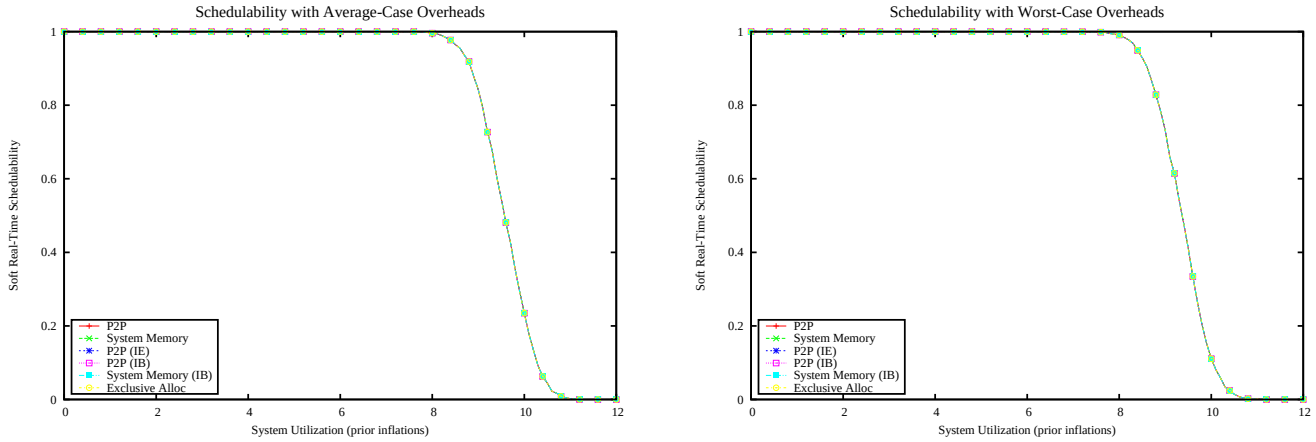

Figure 4587: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

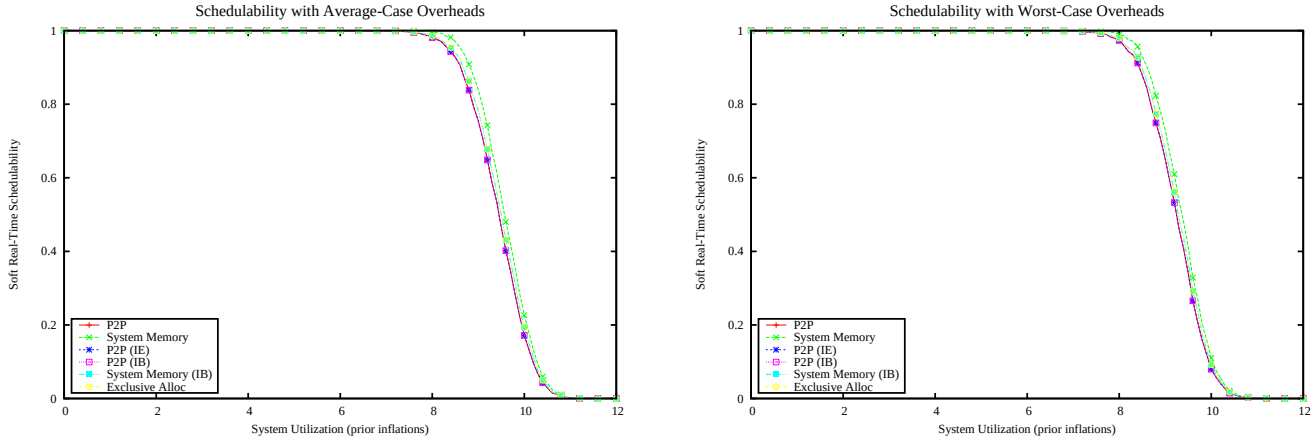

Figure 4588: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

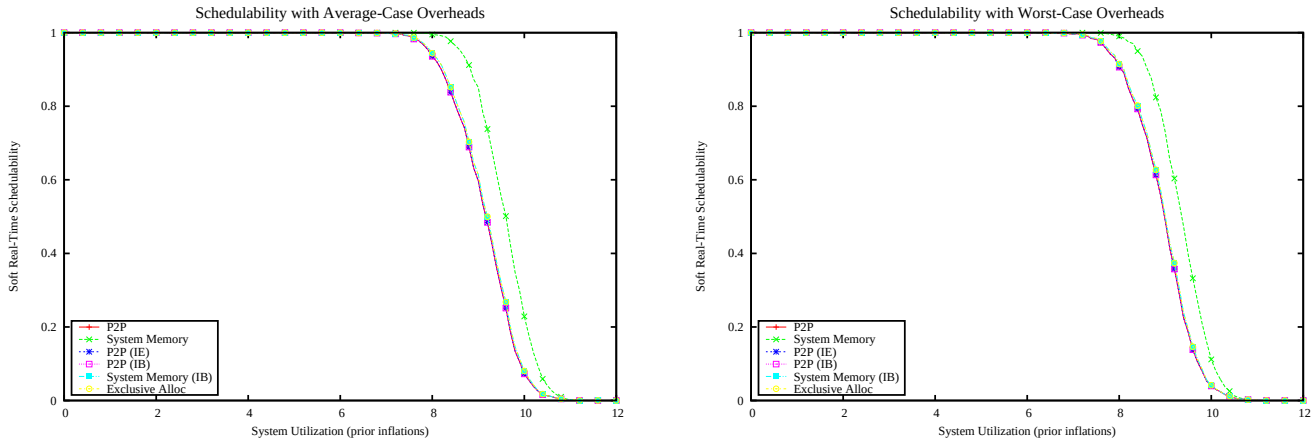

Figure 4589: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

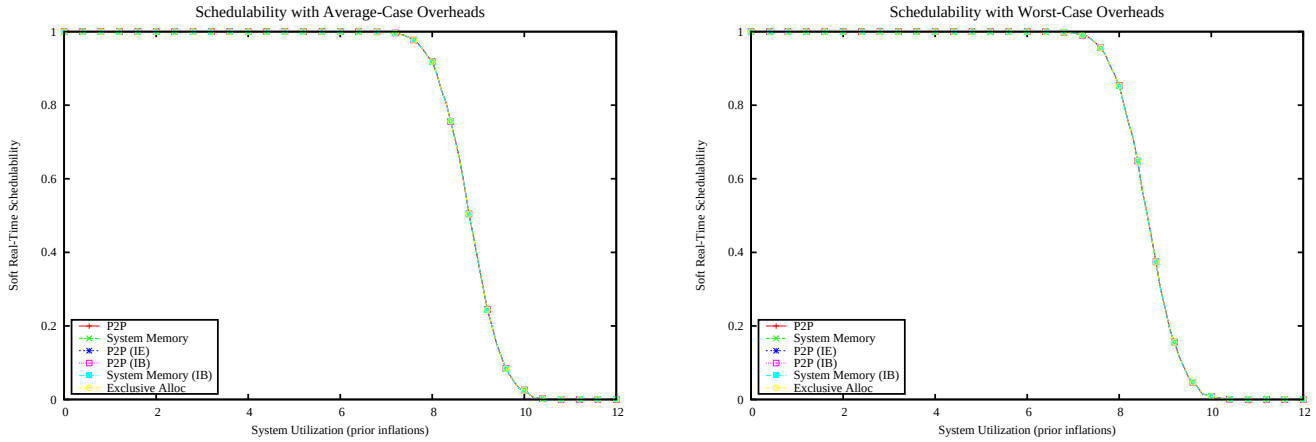

Figure 4590: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

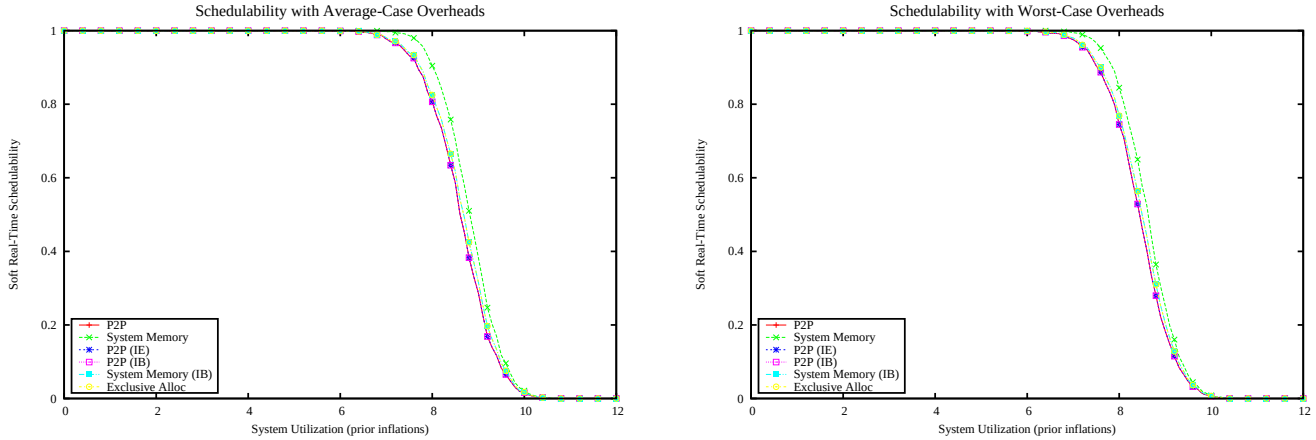

Figure 4591: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

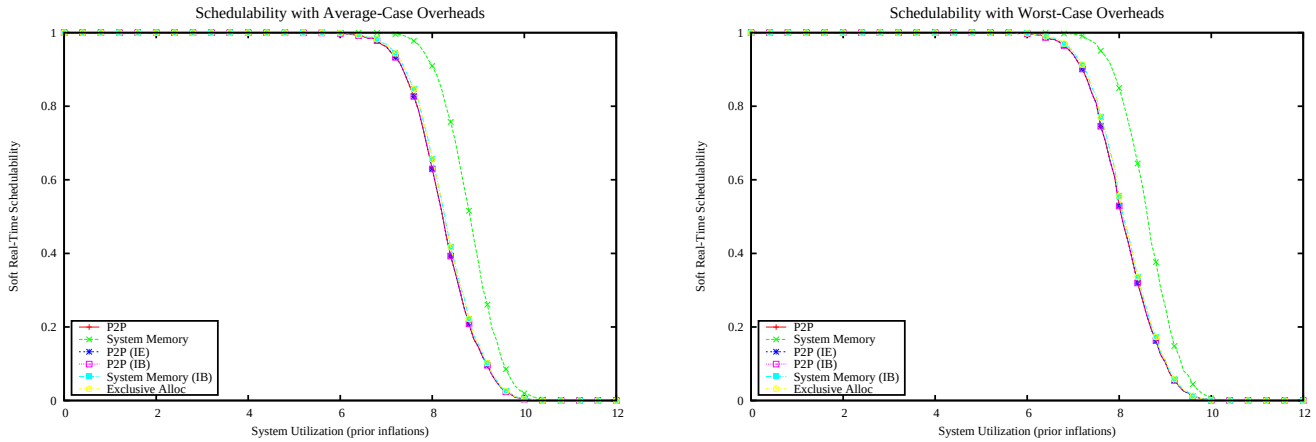

Figure 4592: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

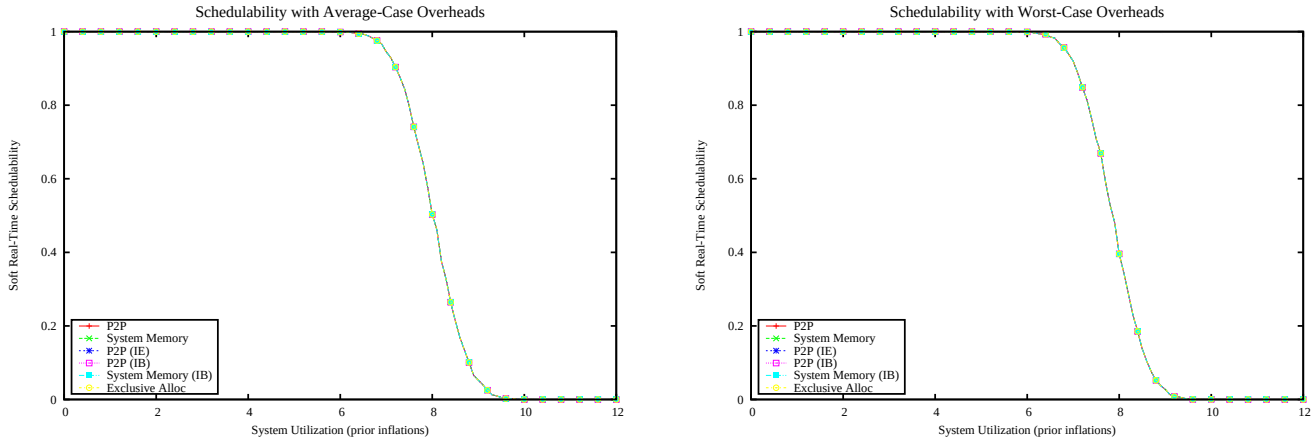

Figure 4593: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

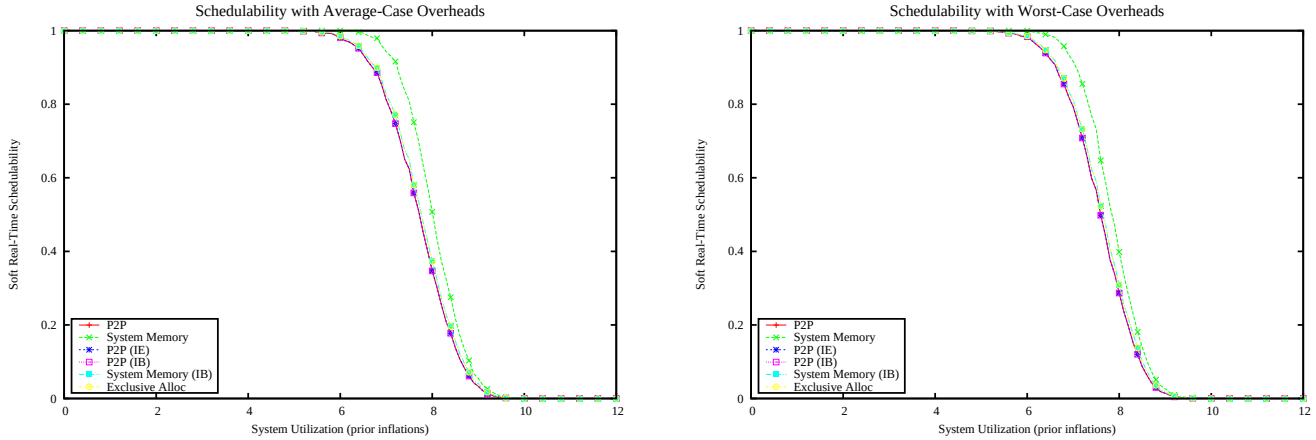

Figure 4594: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

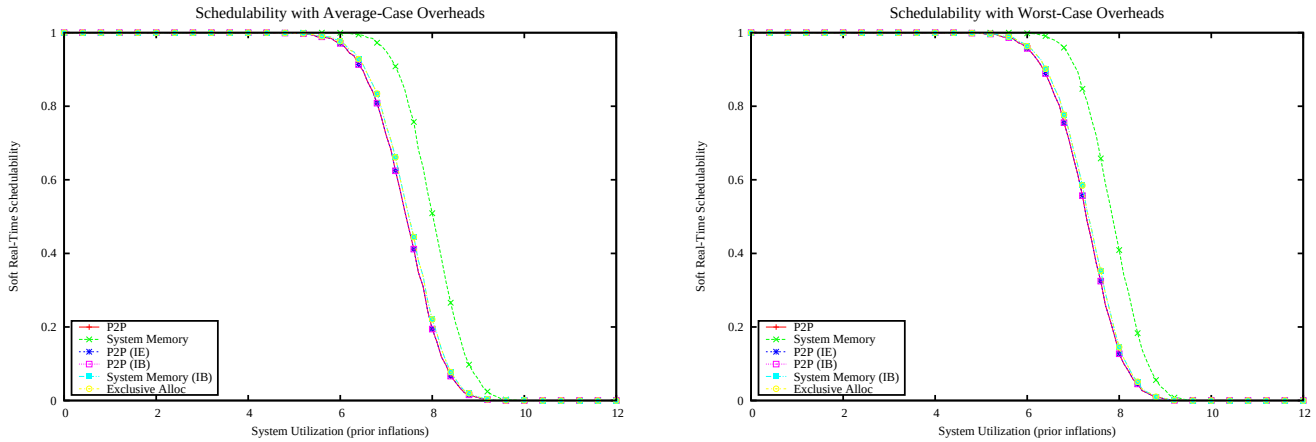

Figure 4595: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

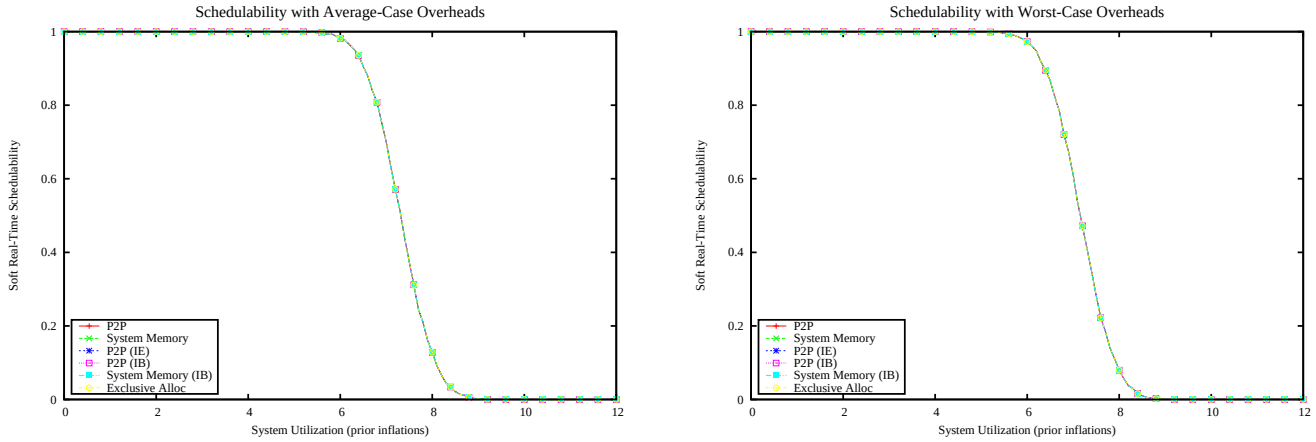

Figure 4596: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

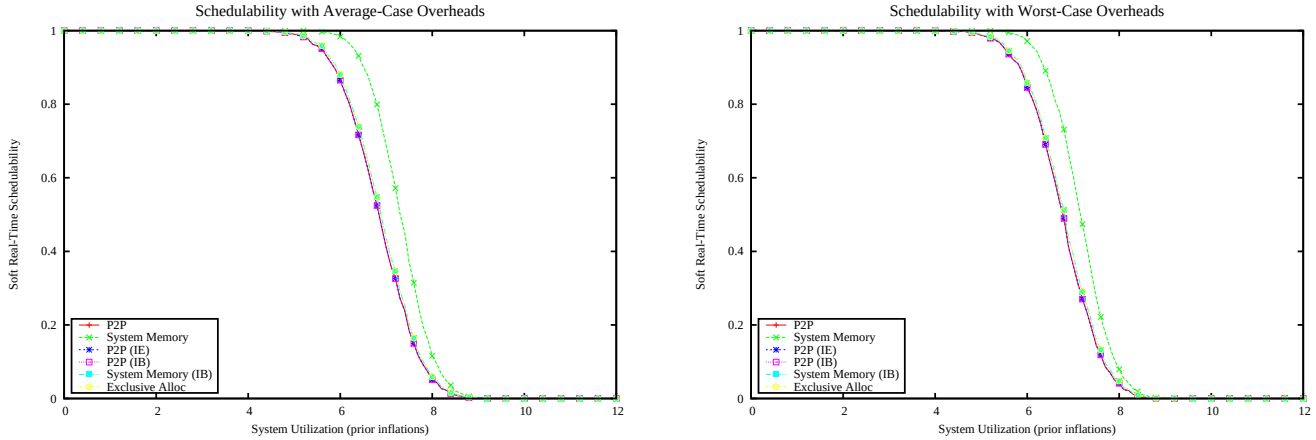

Figure 4597: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

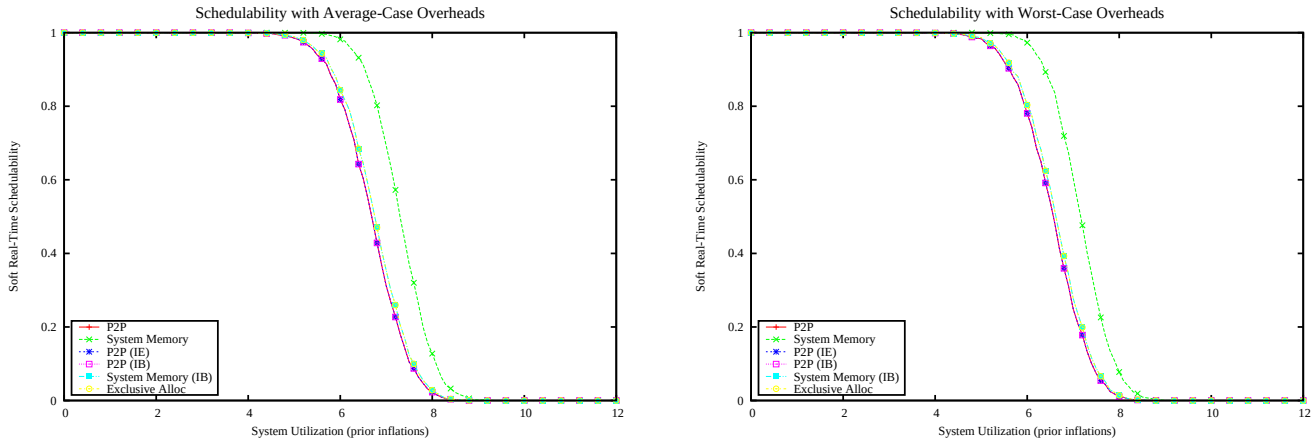

Figure 4598: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

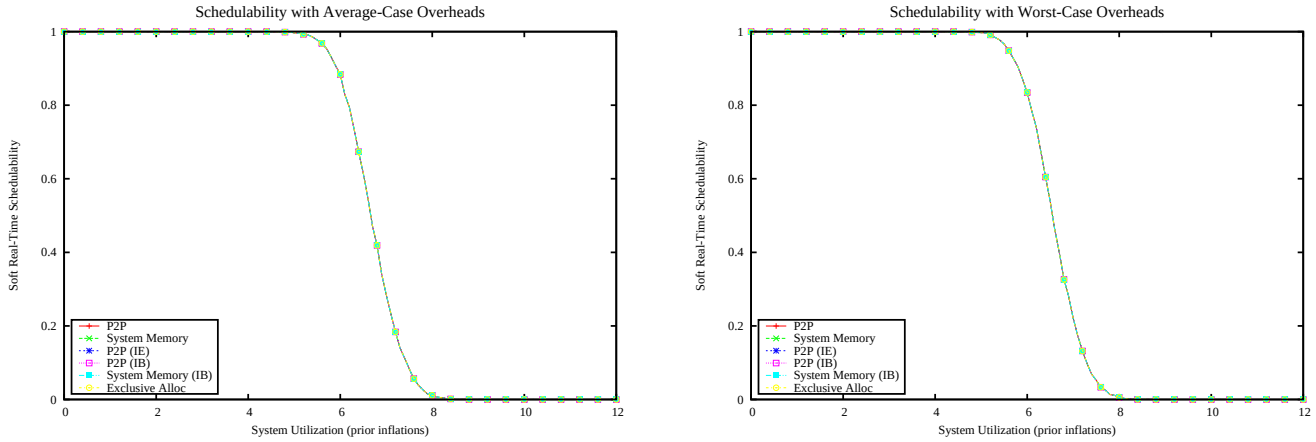

Figure 4599: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

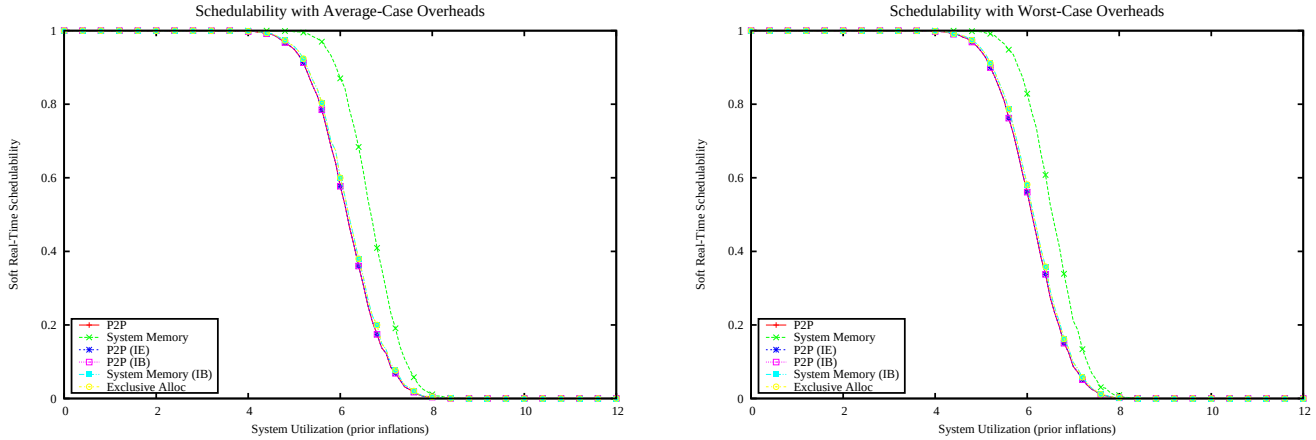

Figure 4600: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

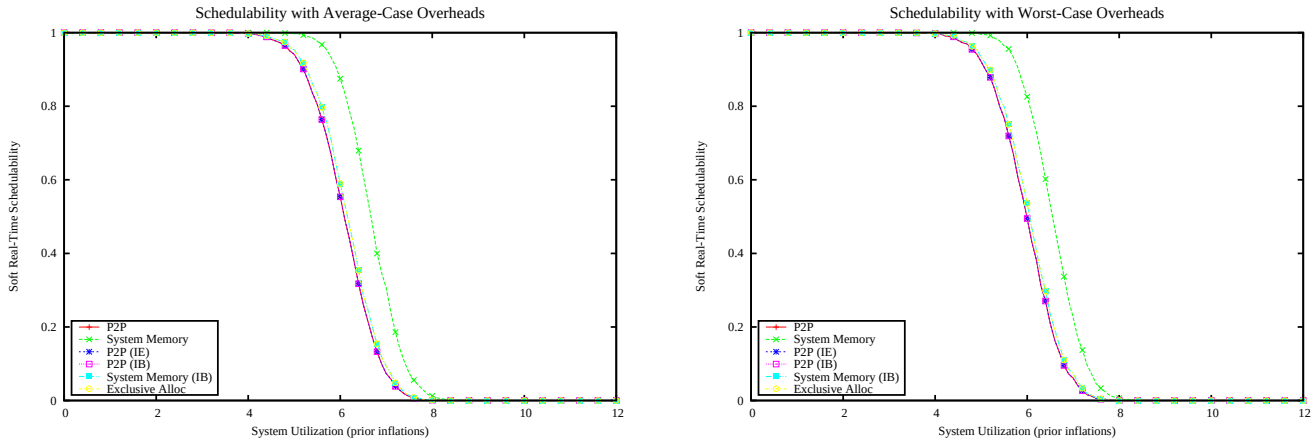

Figure 4601: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

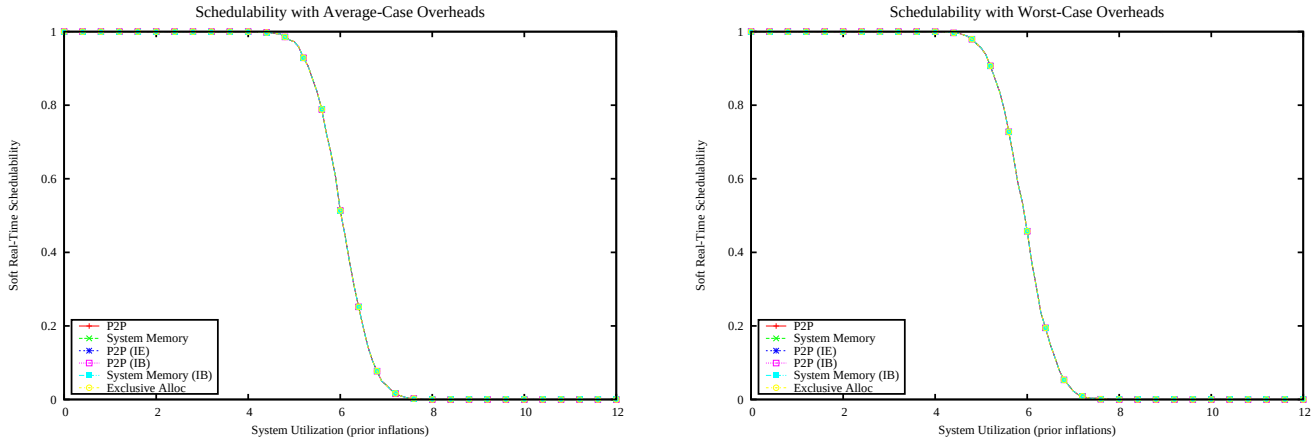

Figure 4602: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

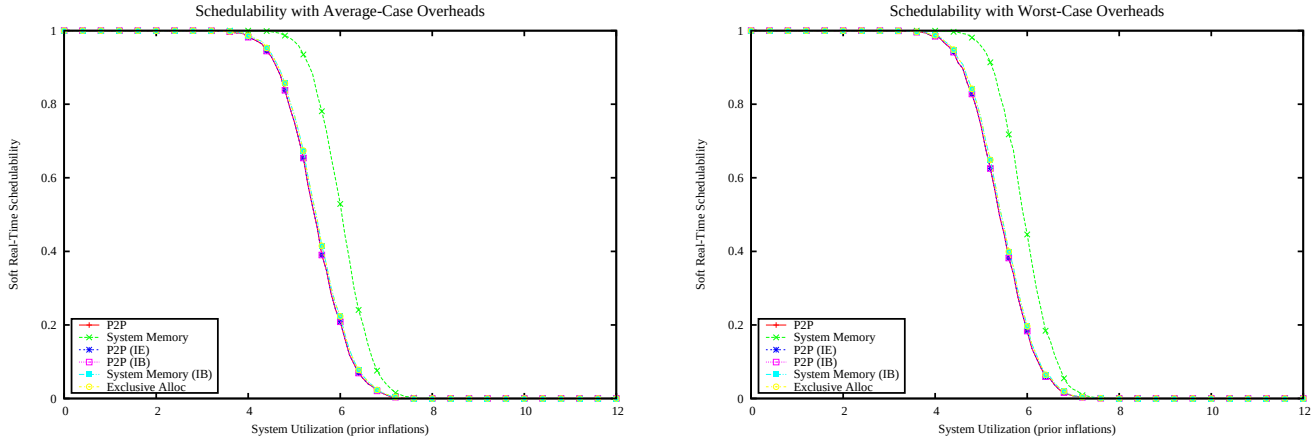

Figure 4603: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

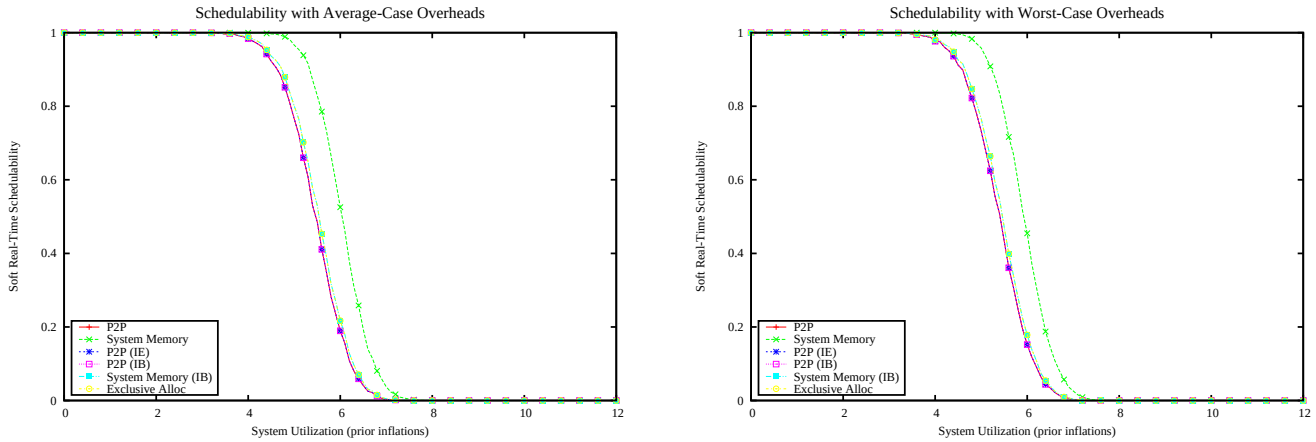

Figure 4604: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

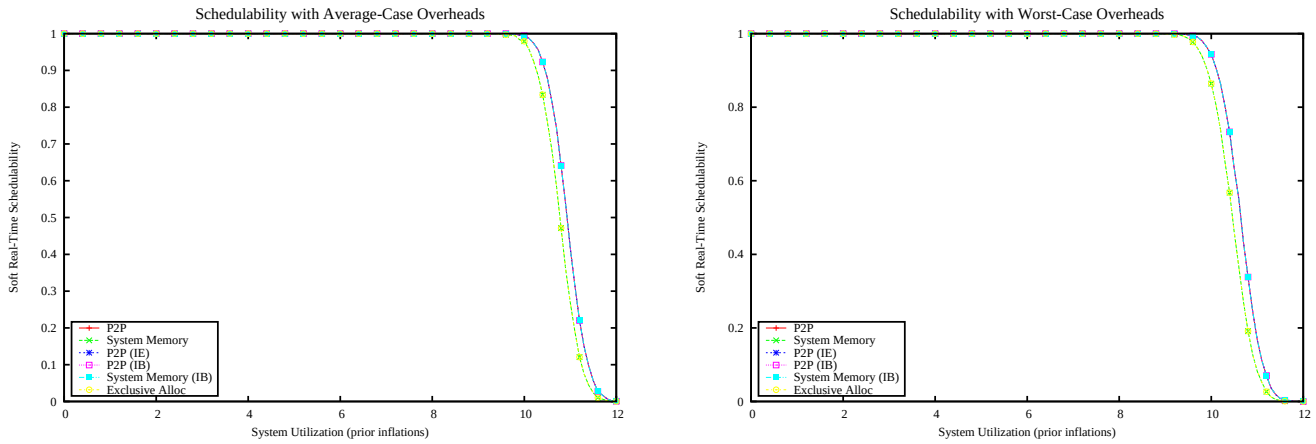

Figure 4605: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

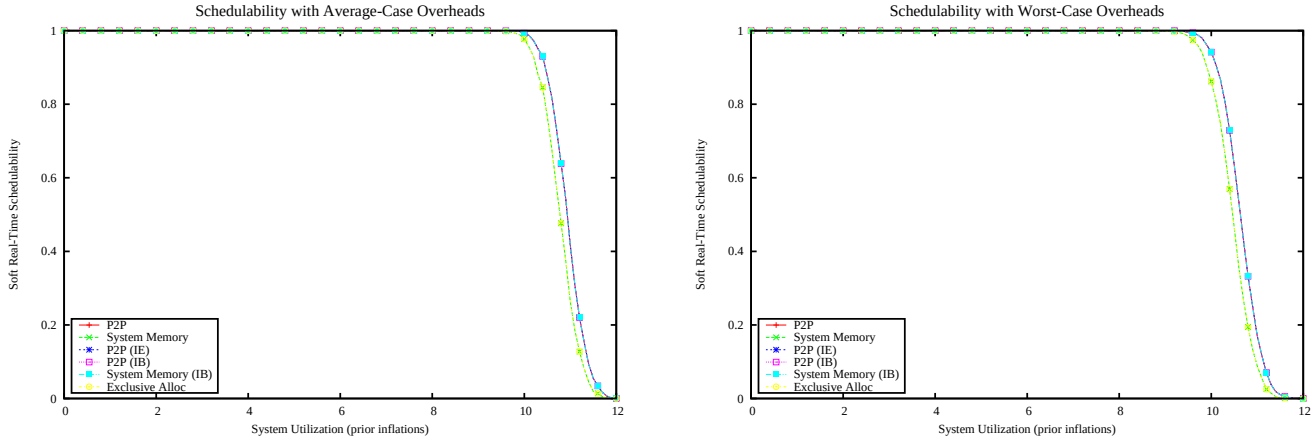

Figure 4606: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

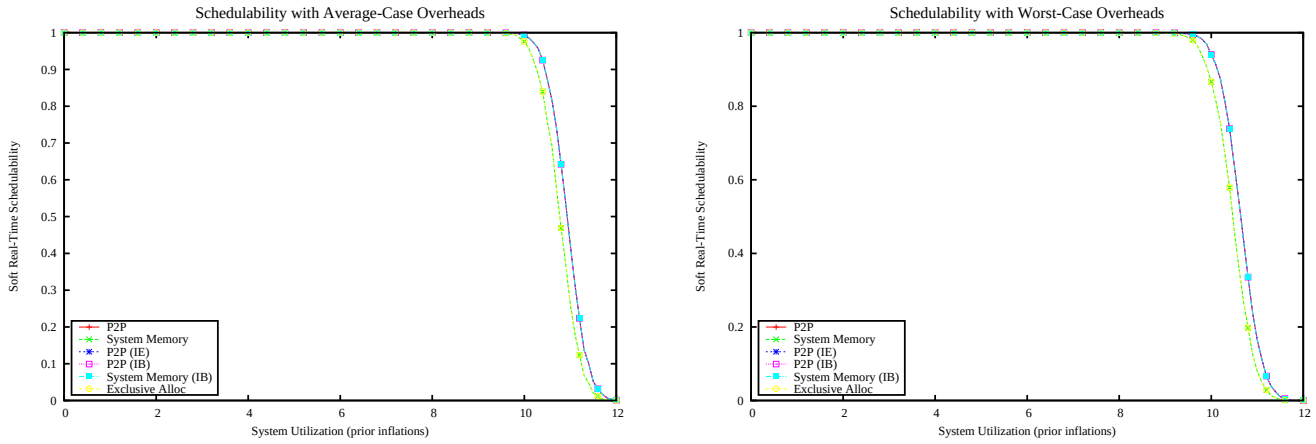

Figure 4607: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

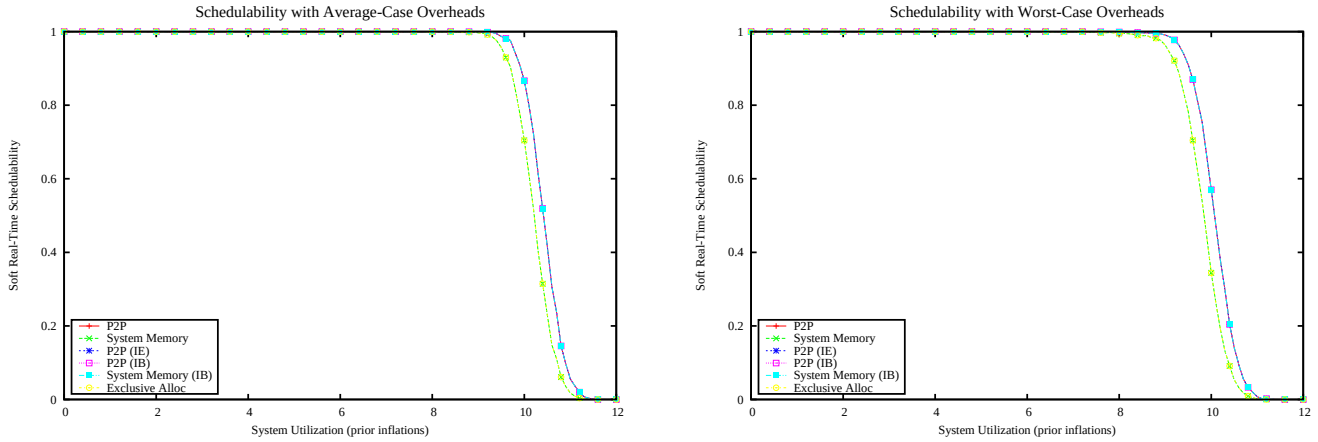

Figure 4608: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

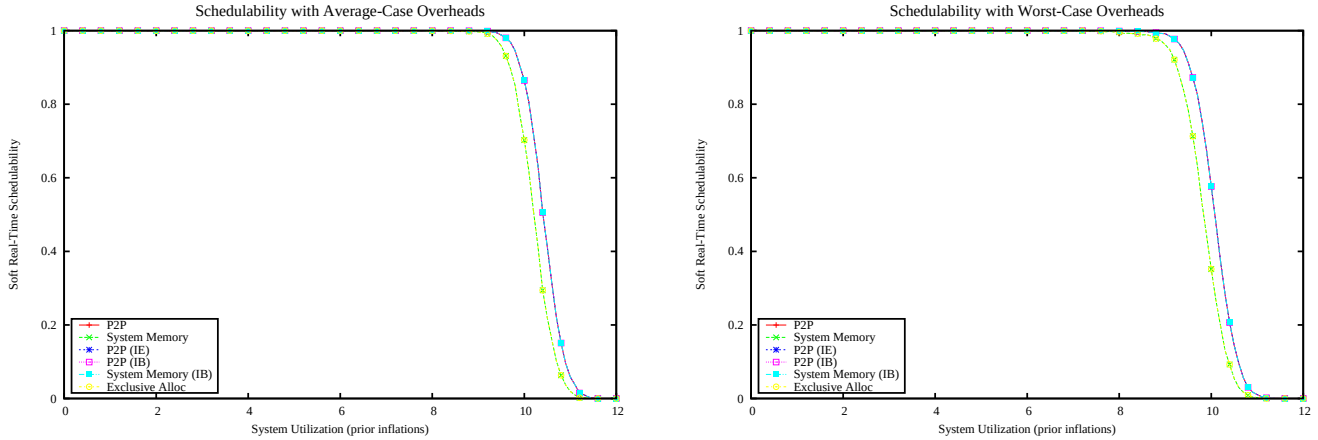

Figure 4609: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

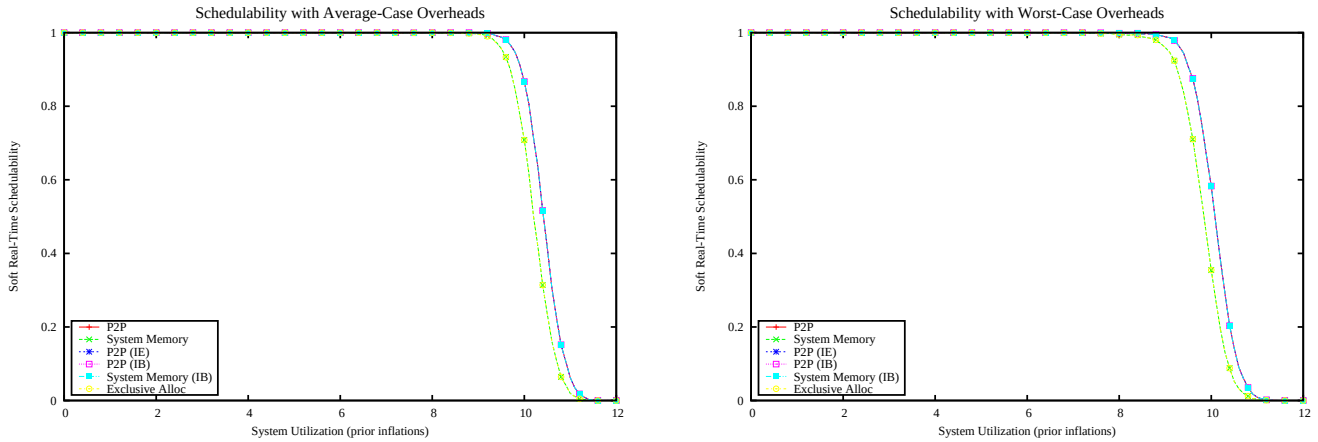

Figure 4610: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

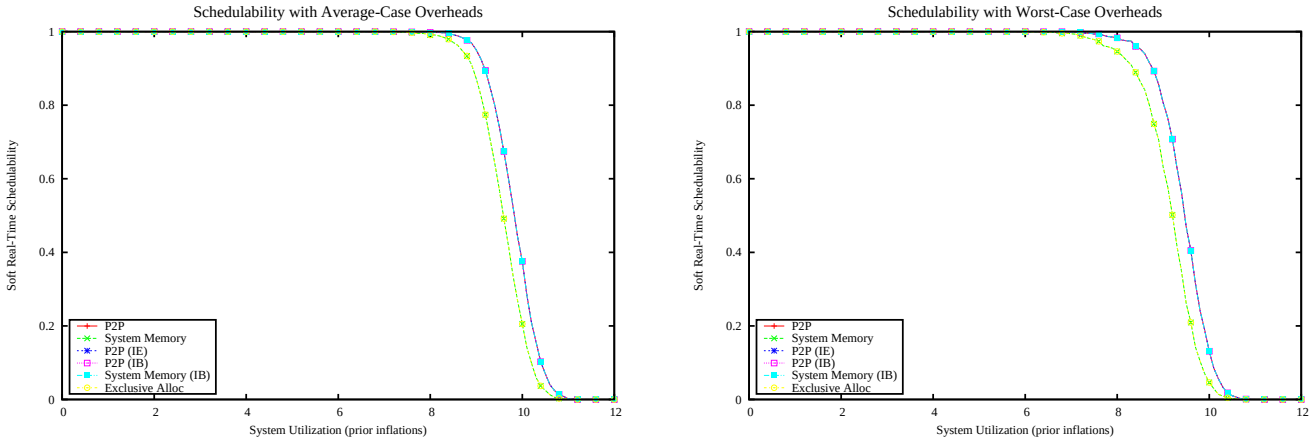

Figure 4611: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

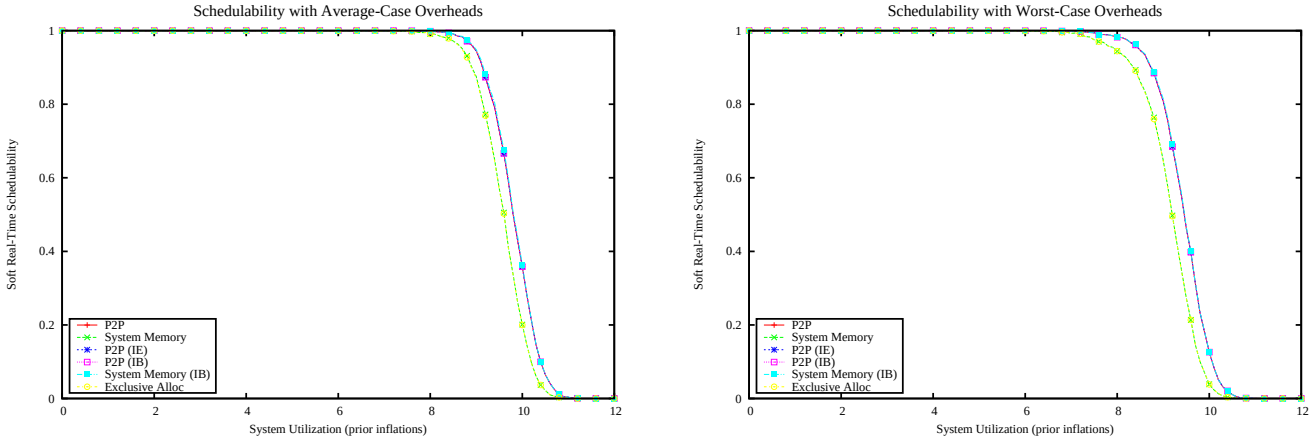

Figure 4612: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

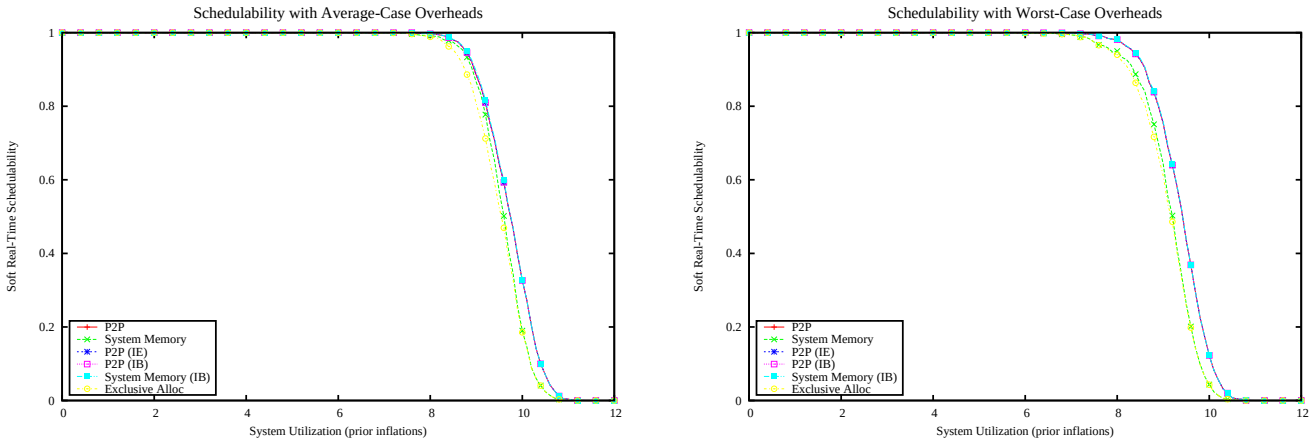

Figure 4613: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

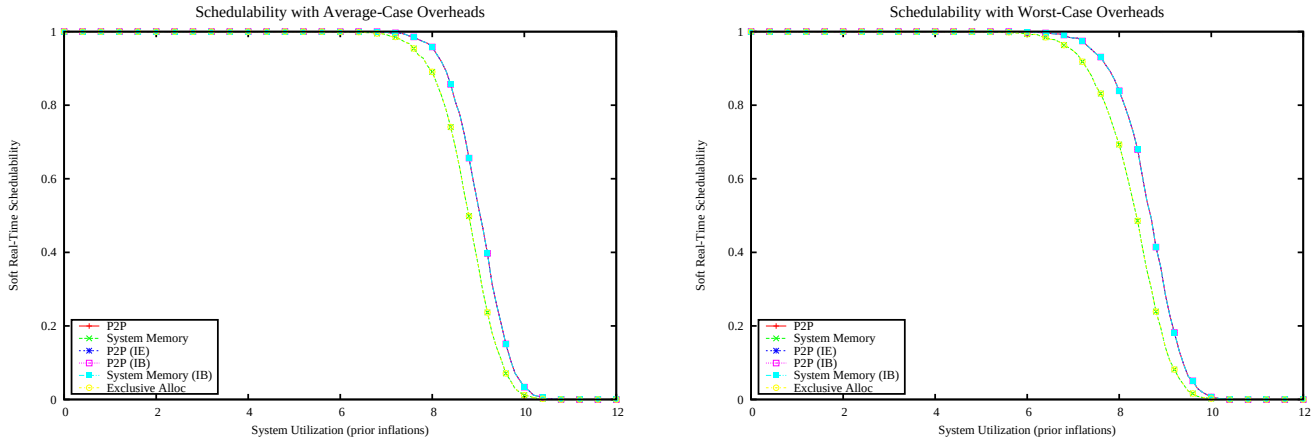

Figure 4614: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

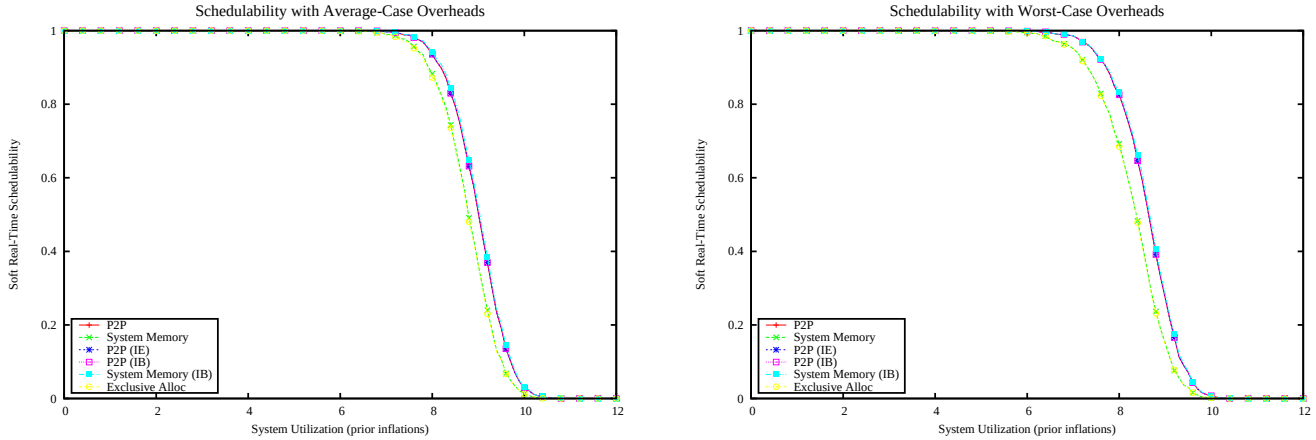

Figure 4615: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

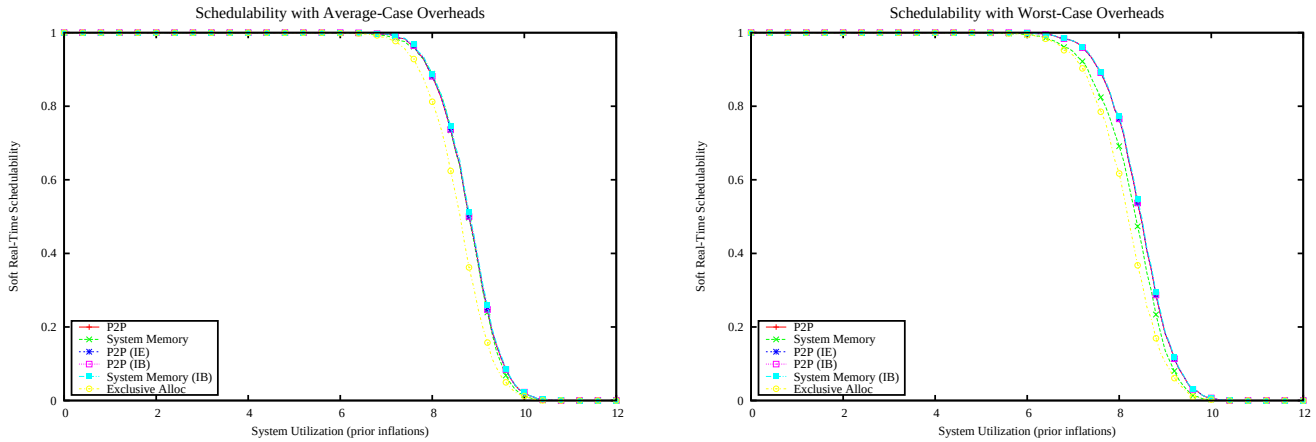

Figure 4616: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

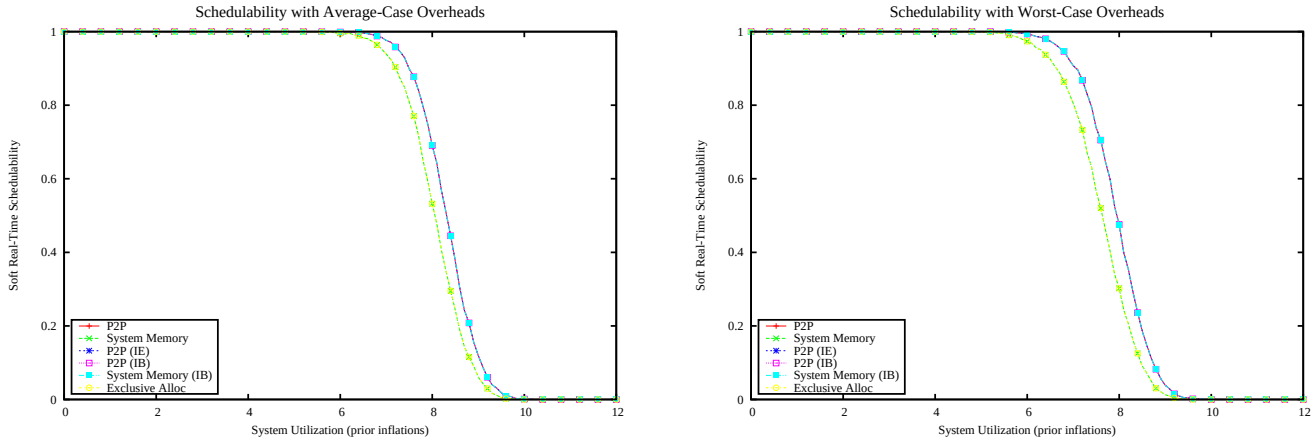

Figure 4617: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

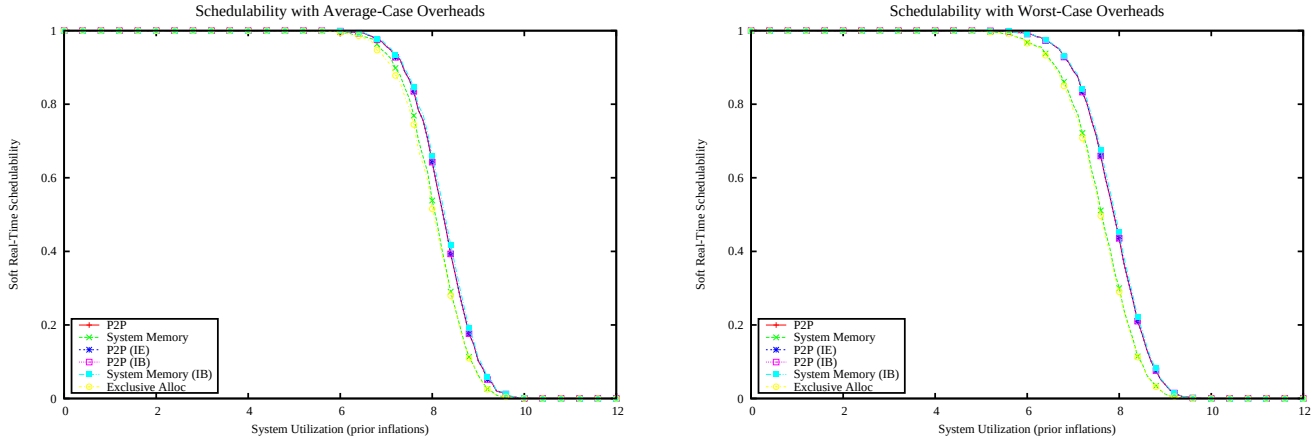

Figure 4618: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

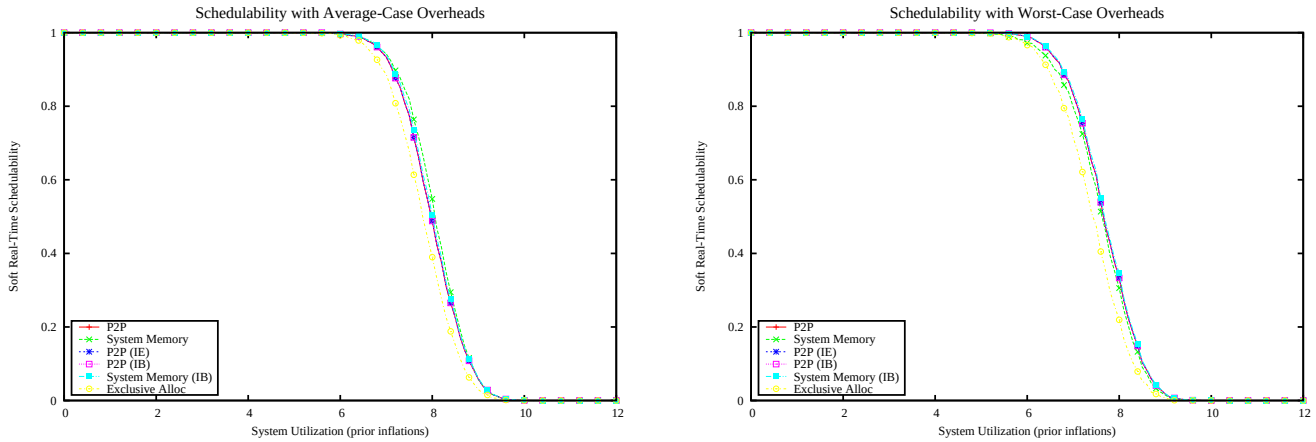

Figure 4619: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

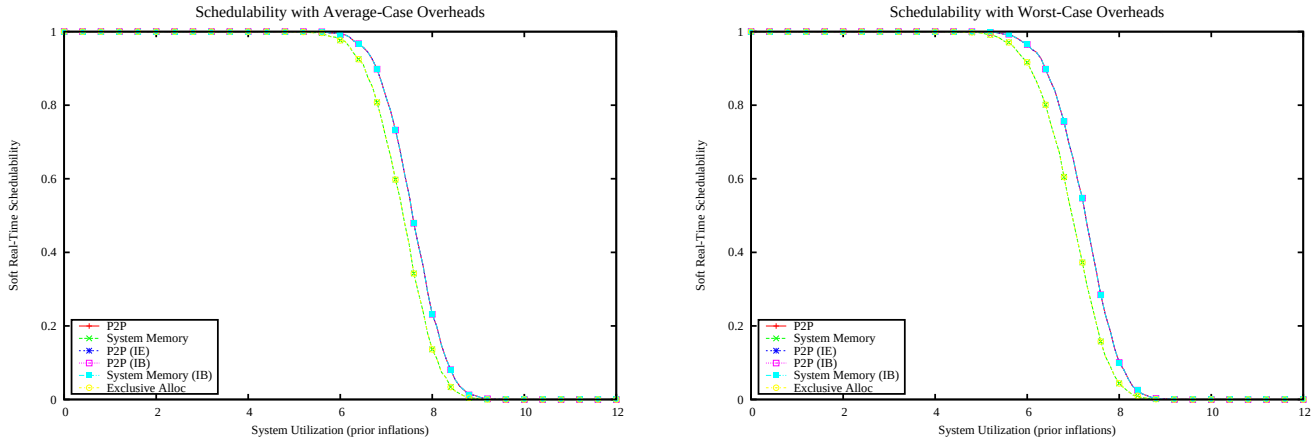

Figure 4620: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

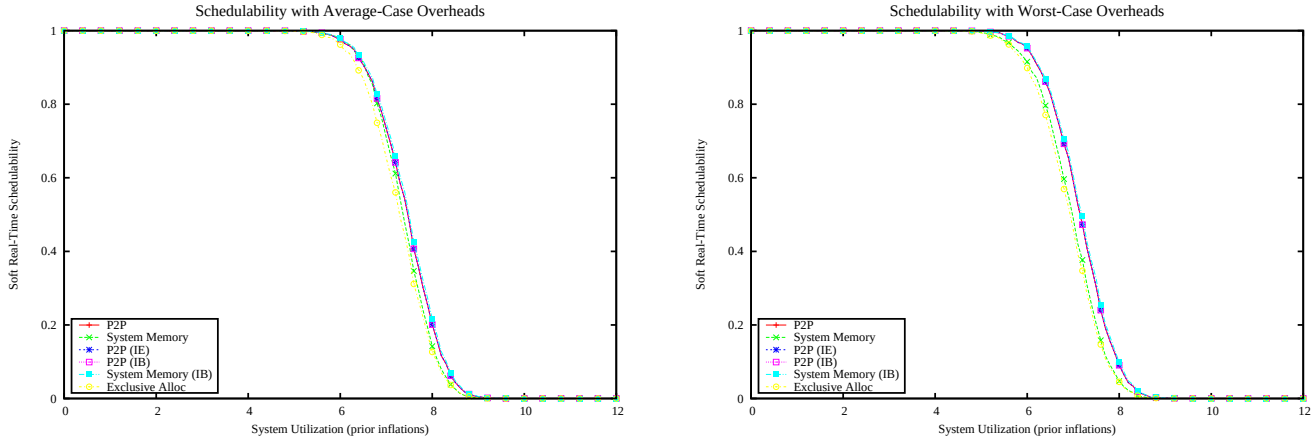

Figure 4621: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

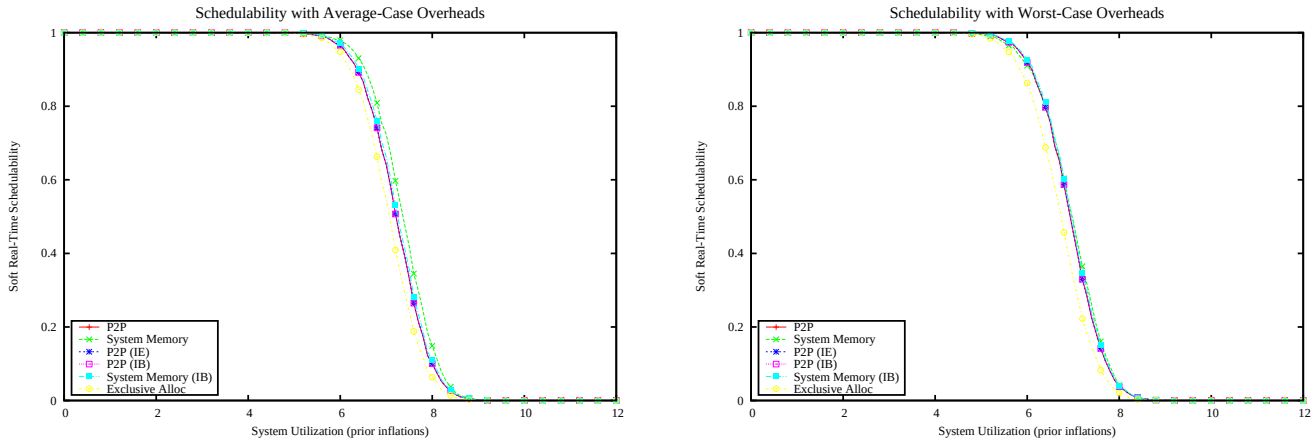

Figure 4622: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

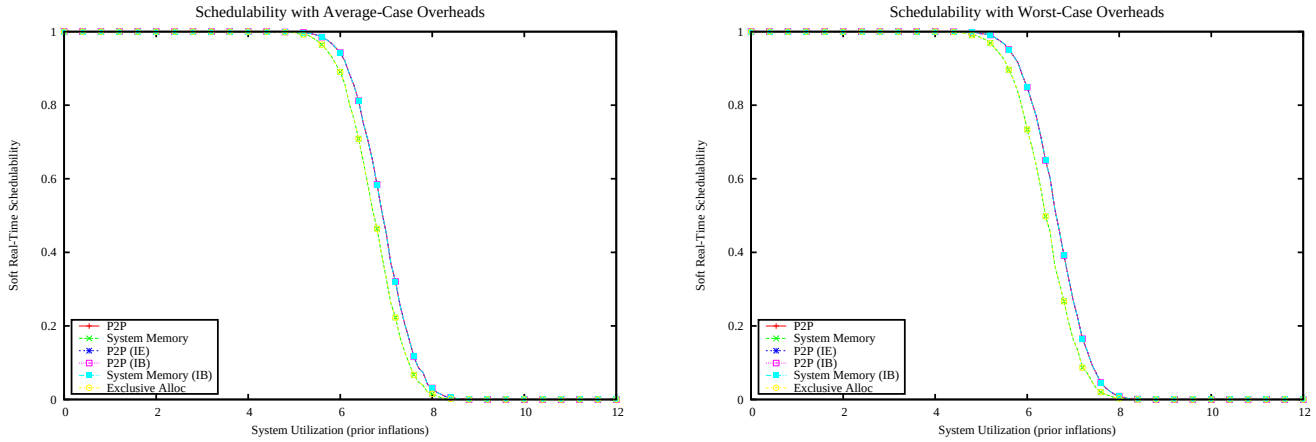

Figure 4623: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

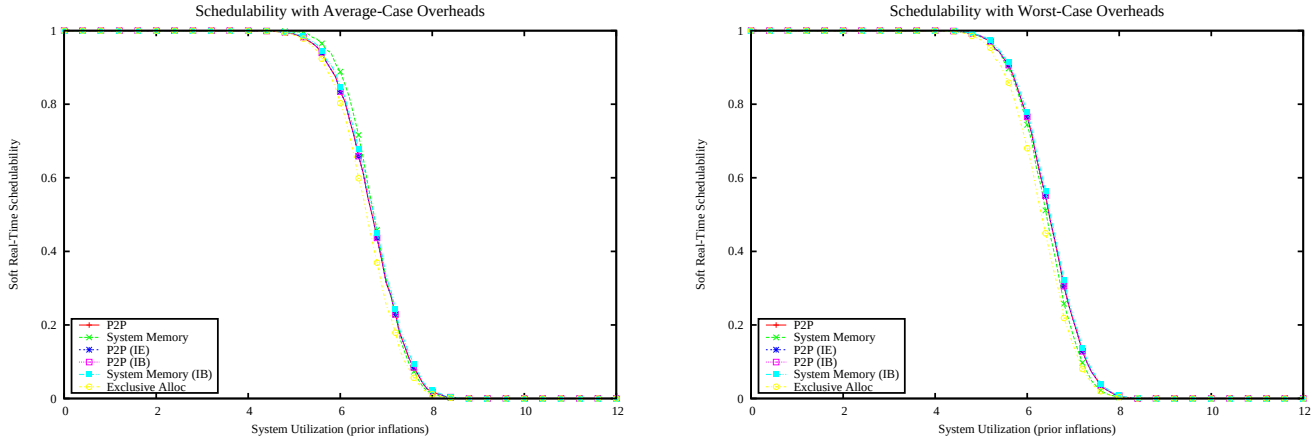

Figure 4624: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

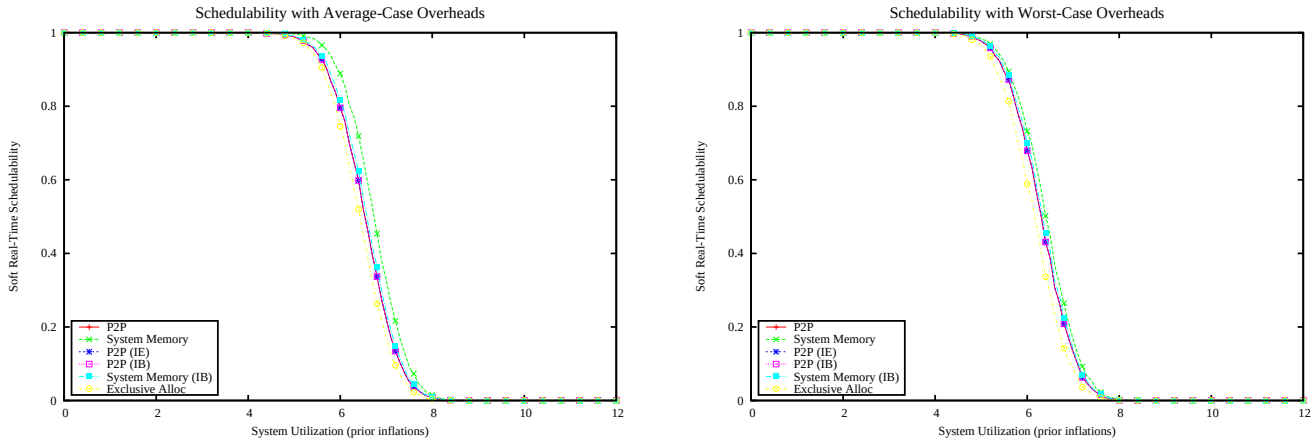

Figure 4625: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

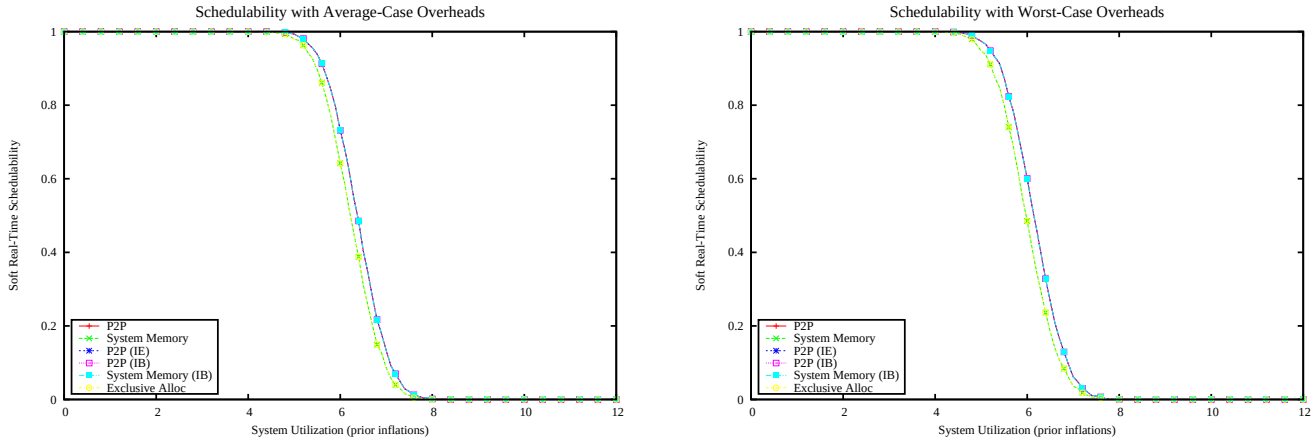

Figure 4626: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

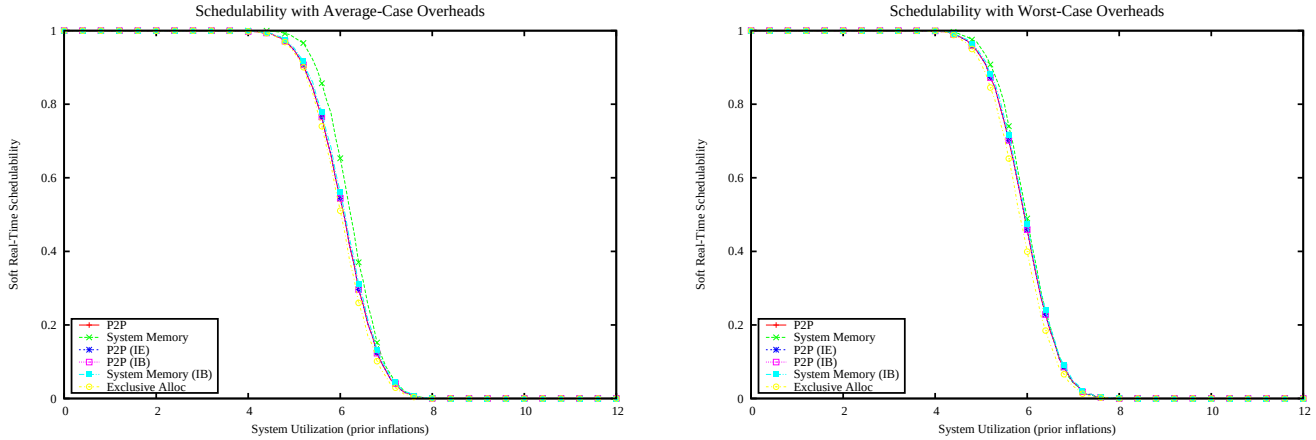

Figure 4627: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

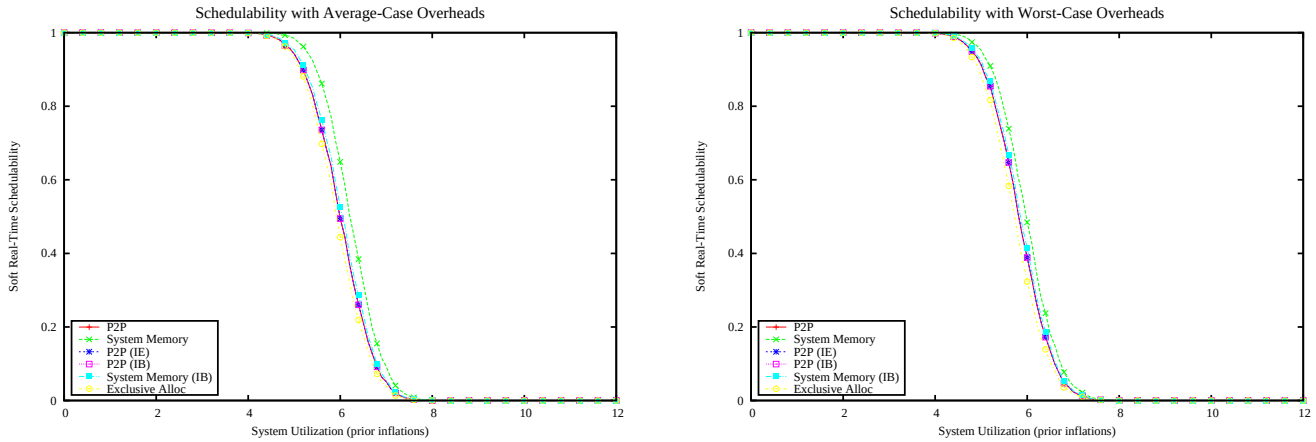

Figure 4628: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

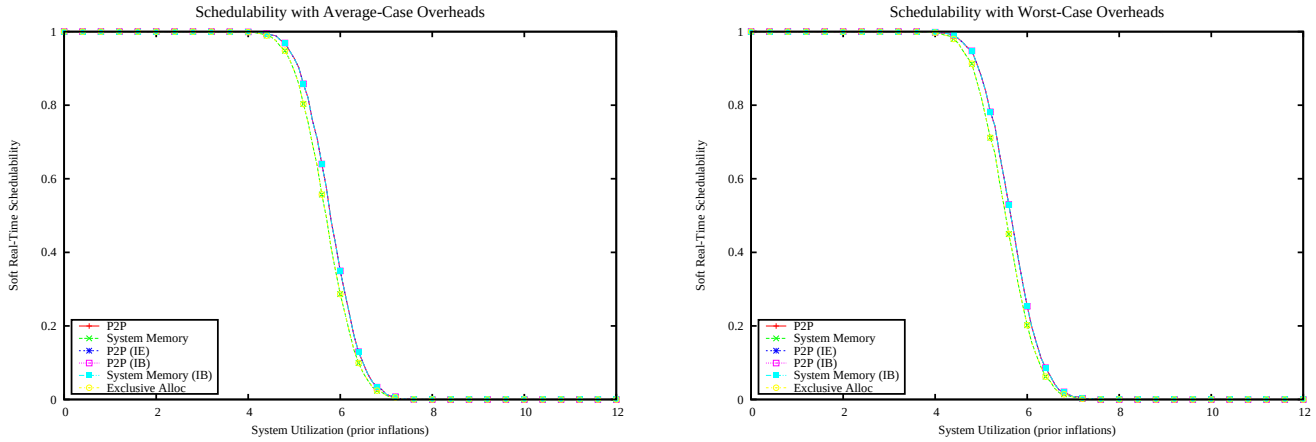

Figure 4629: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

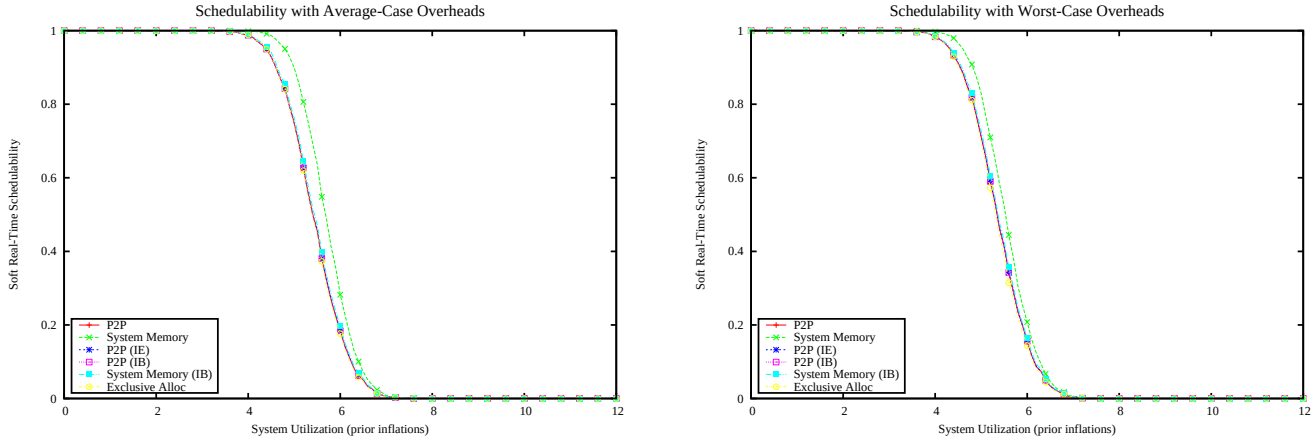

Figure 4630: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

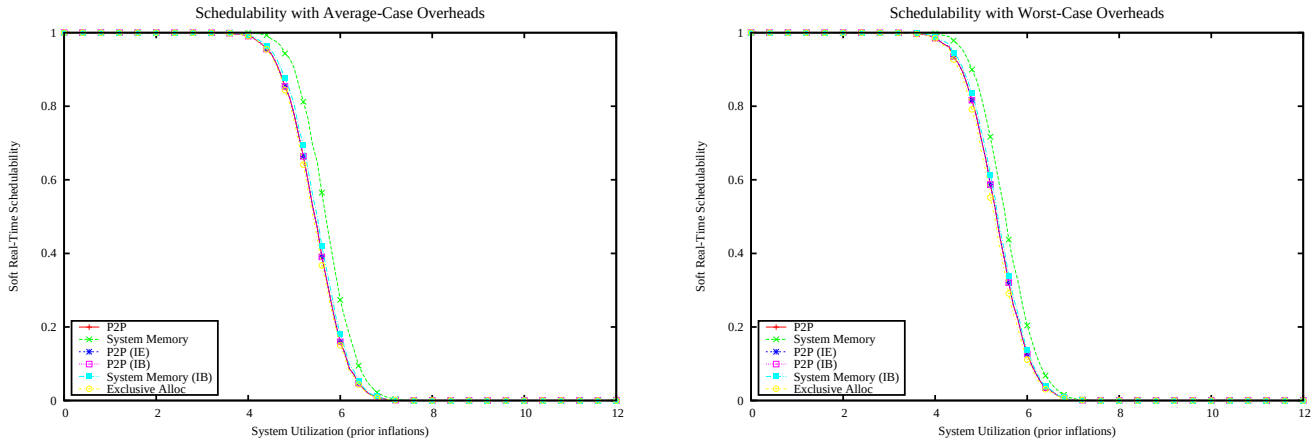

Figure 4631: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

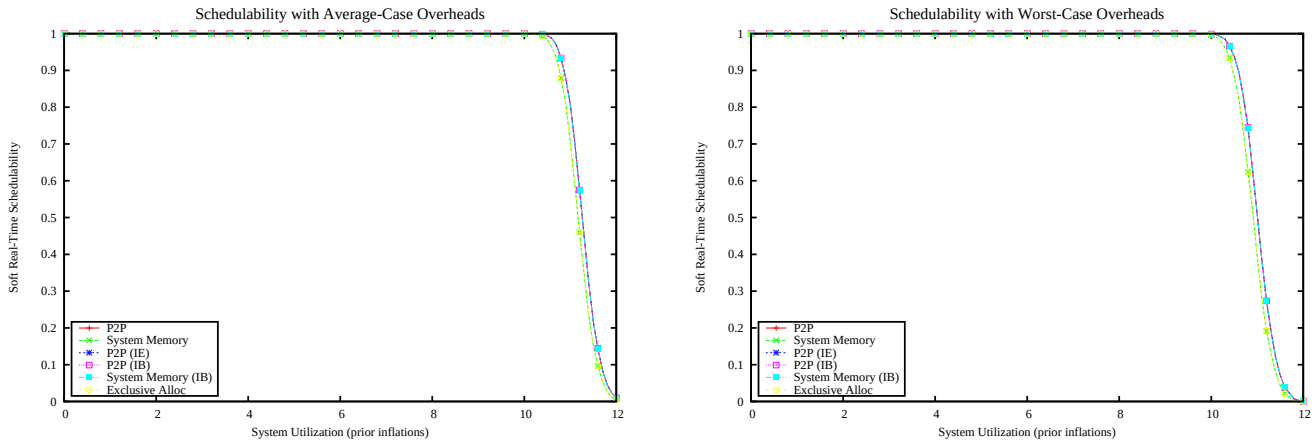

Figure 4632: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

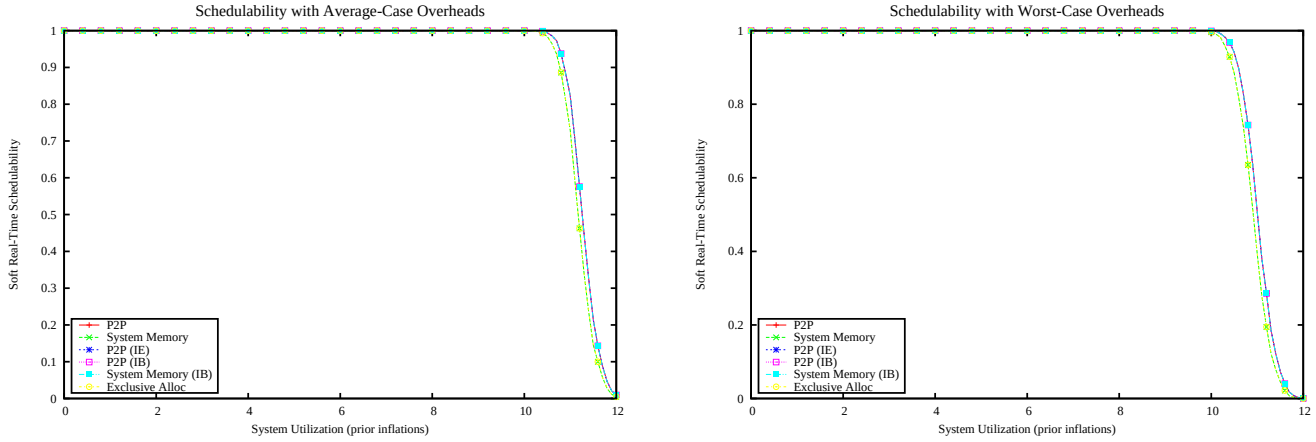

Figure 4633: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

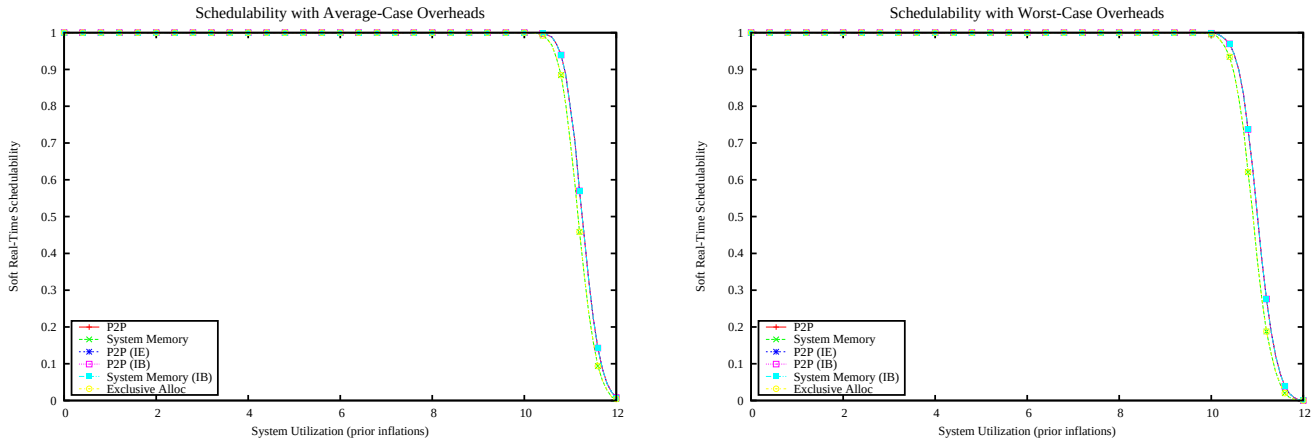

Figure 4634: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

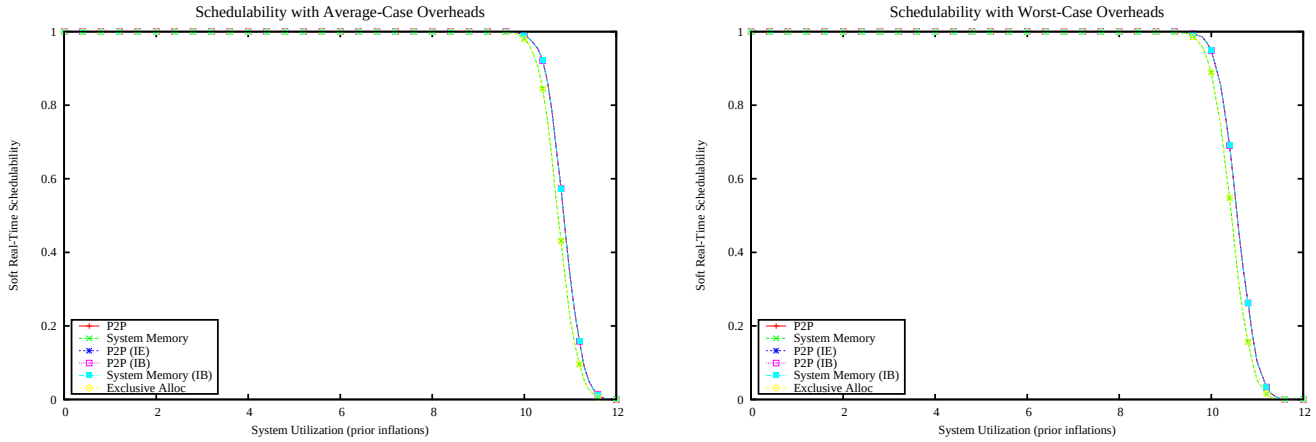

Figure 4635: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

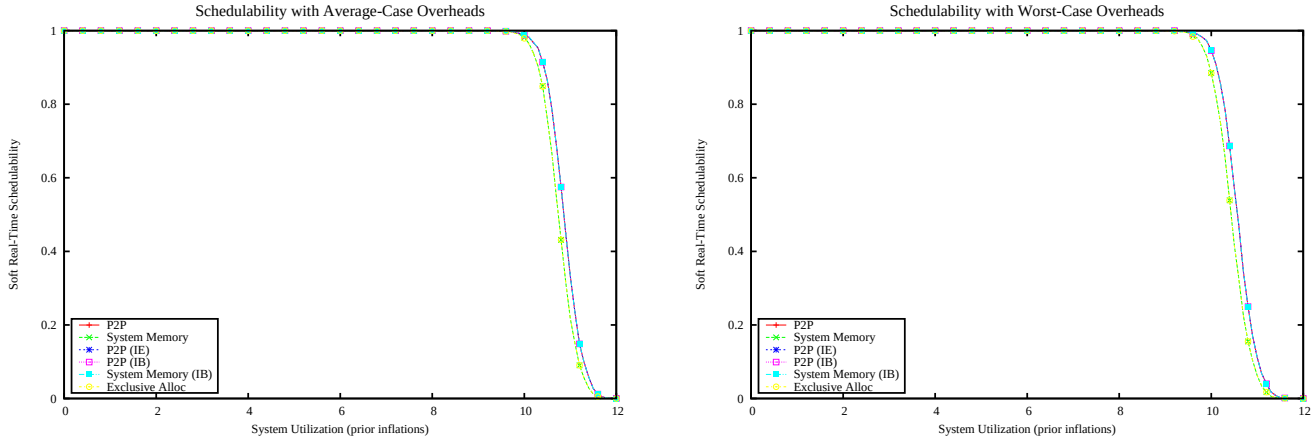

Figure 4636: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

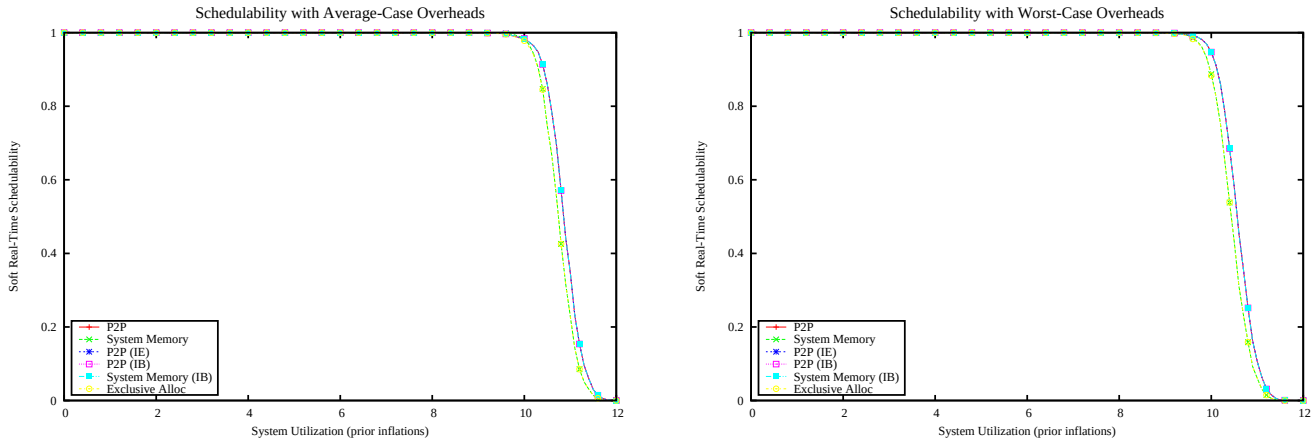

Figure 4637: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

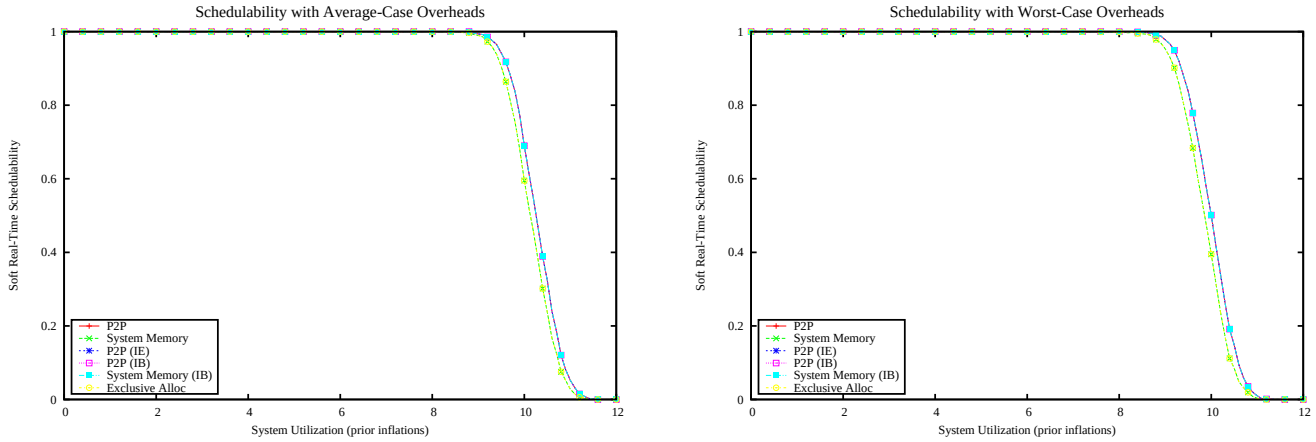

Figure 4638: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

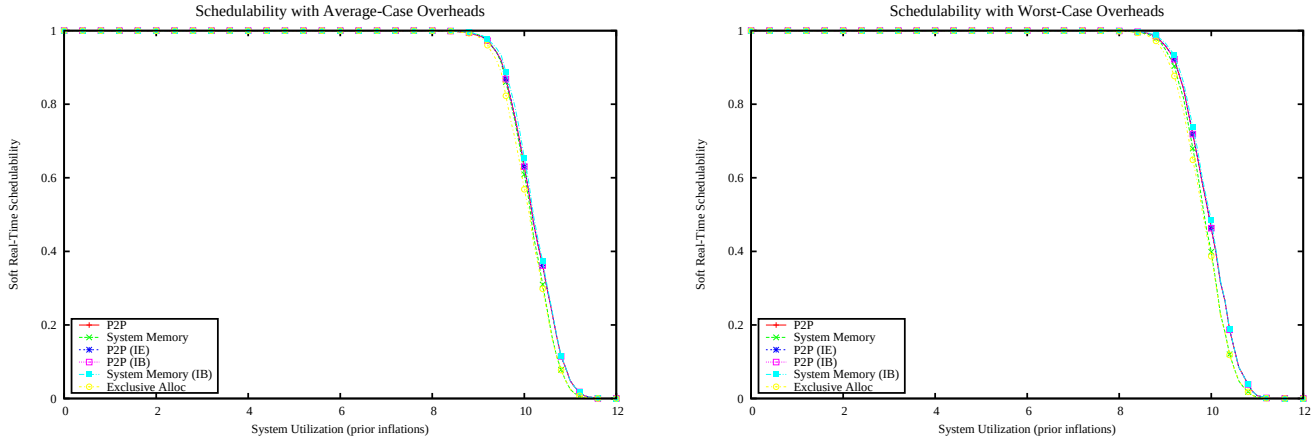

Figure 4639: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

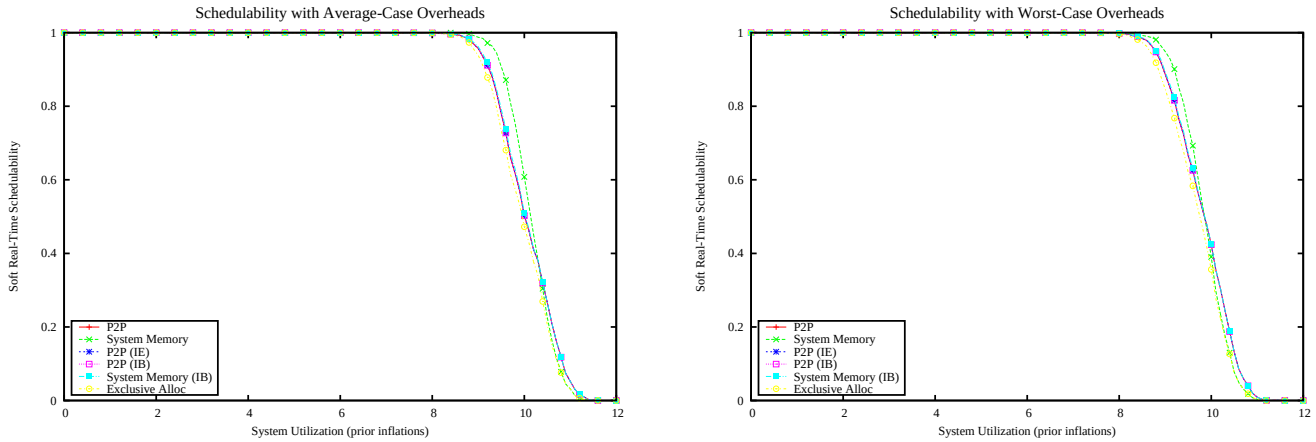

Figure 4640: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

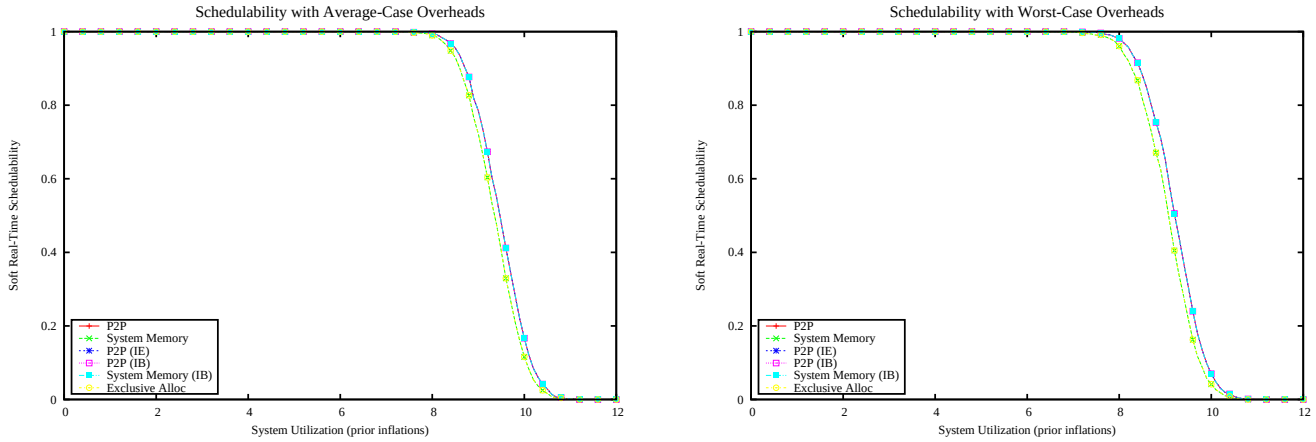

Figure 4641: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

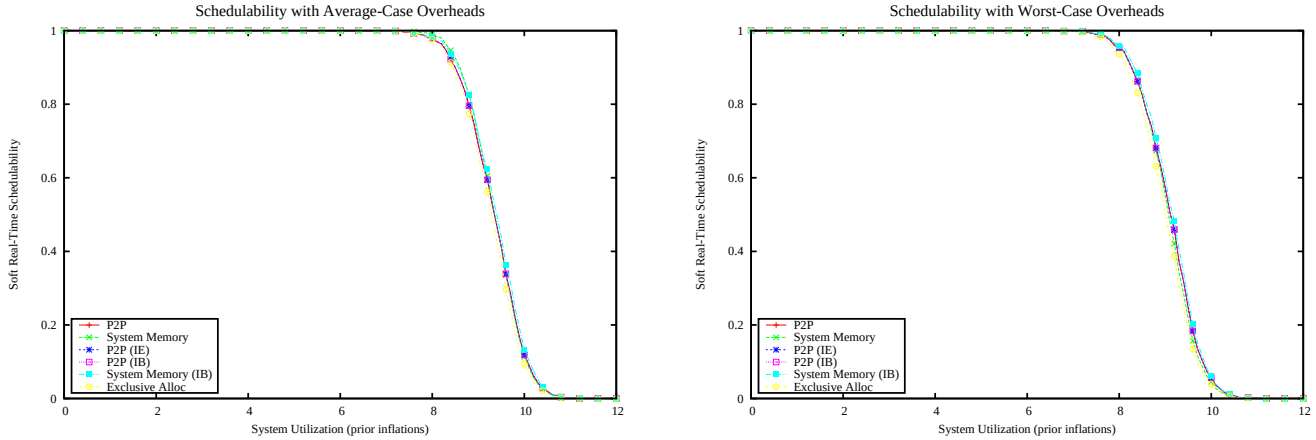

Figure 4642: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

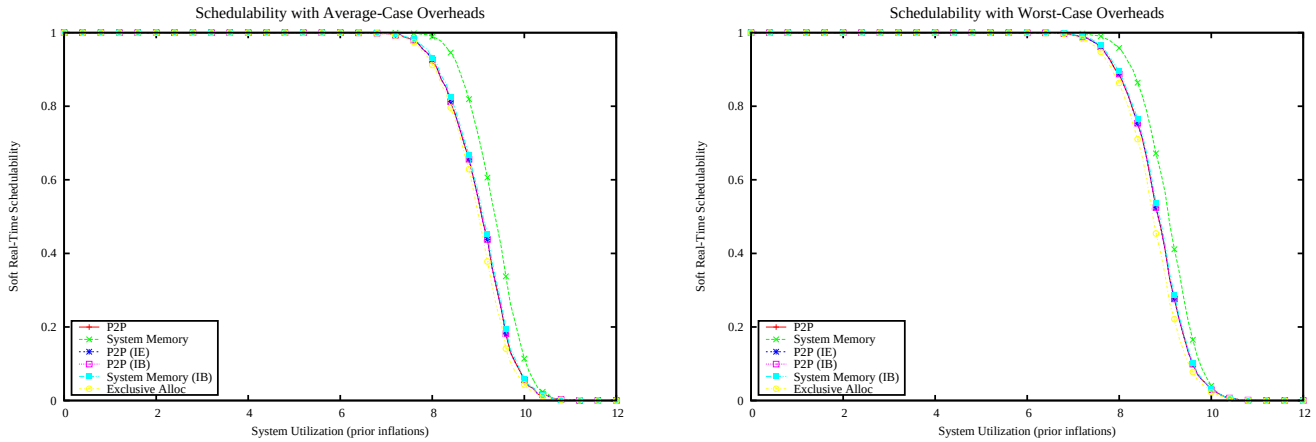

Figure 4643: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

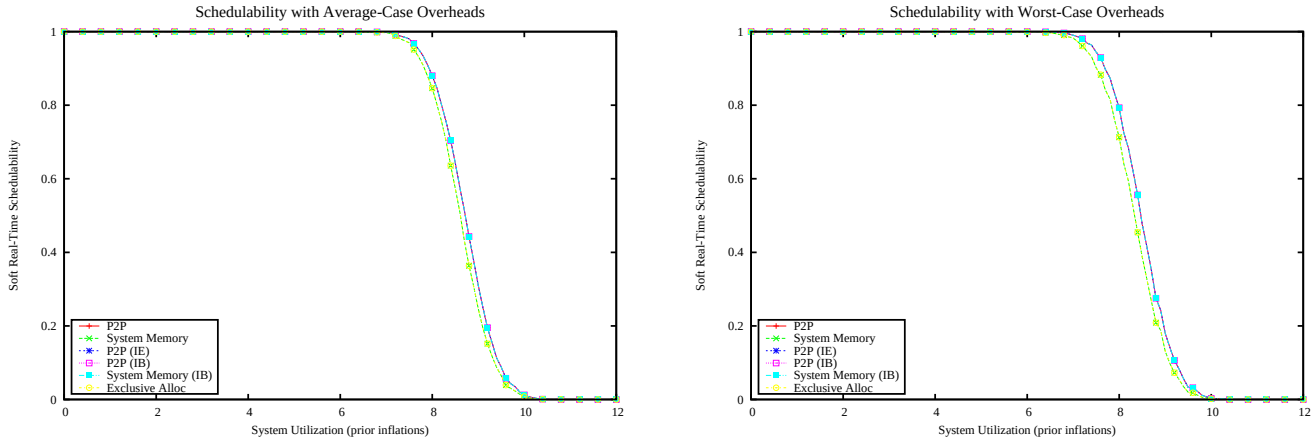

Figure 4644: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

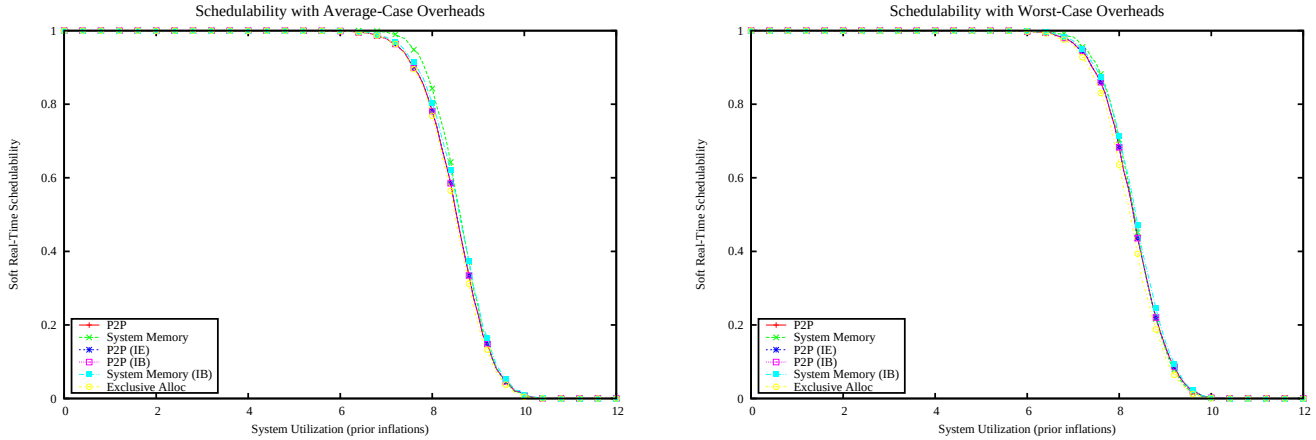

Figure 4645: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

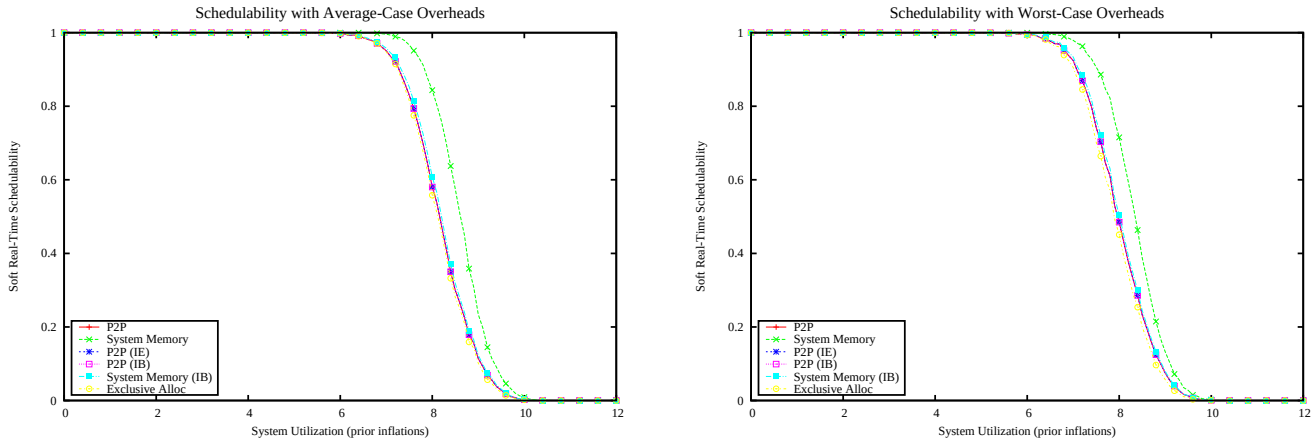

Figure 4646: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

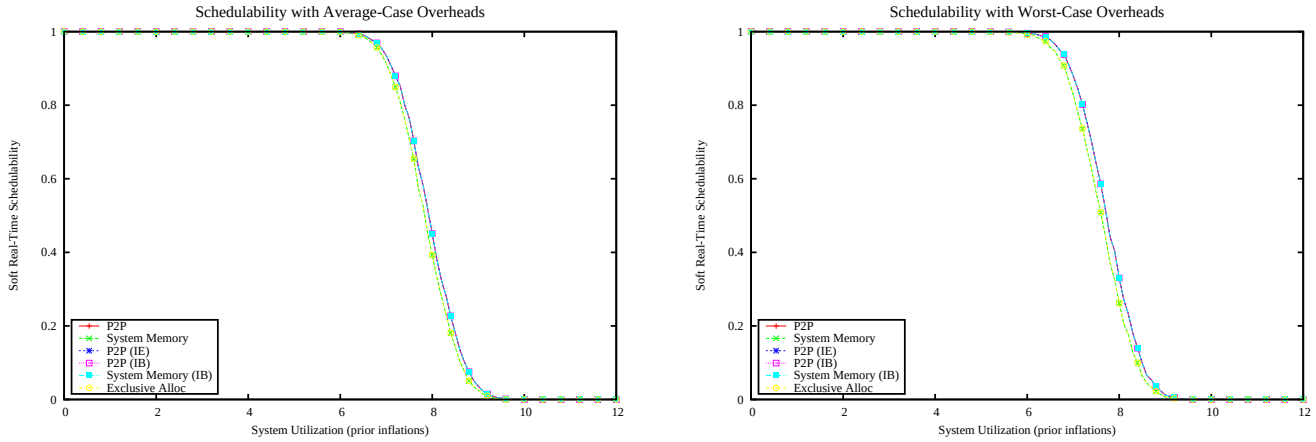

Figure 4647: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

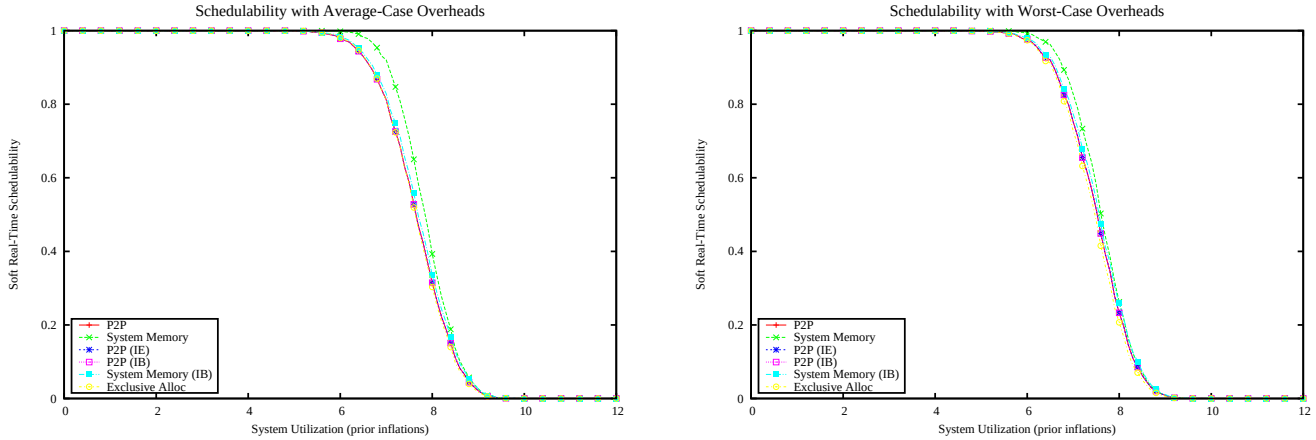

Figure 4648: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

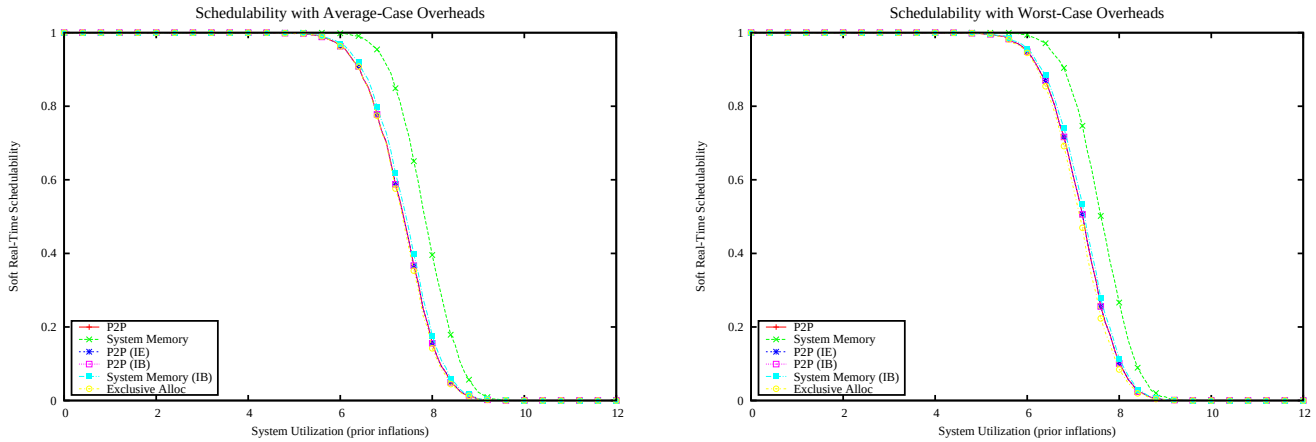

Figure 4649: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

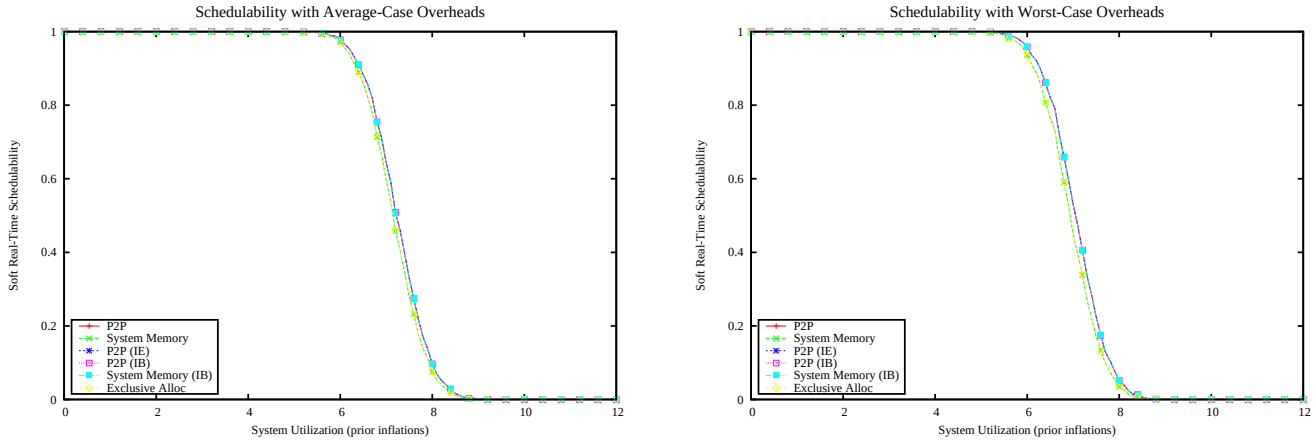

Figure 4650: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

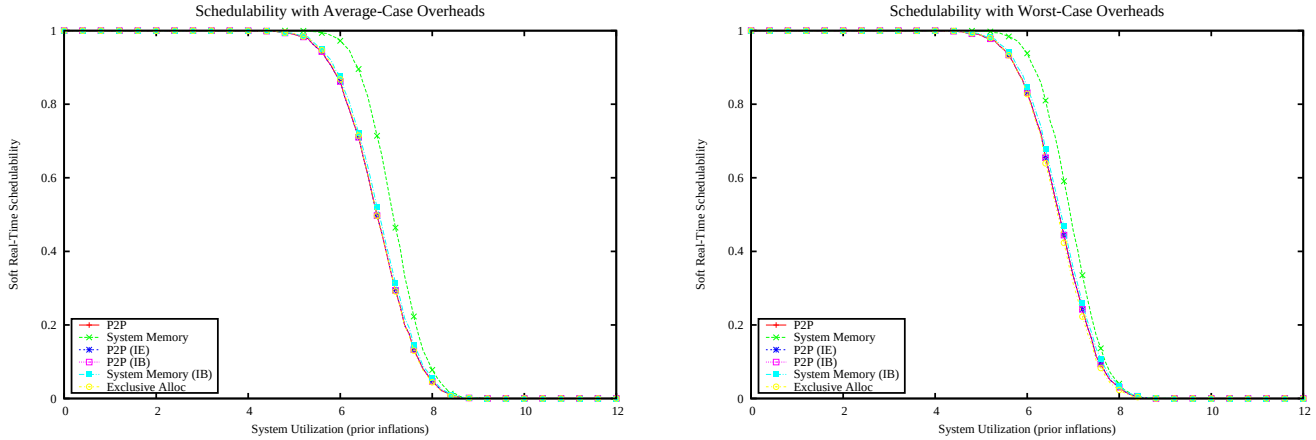

Figure 4651: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

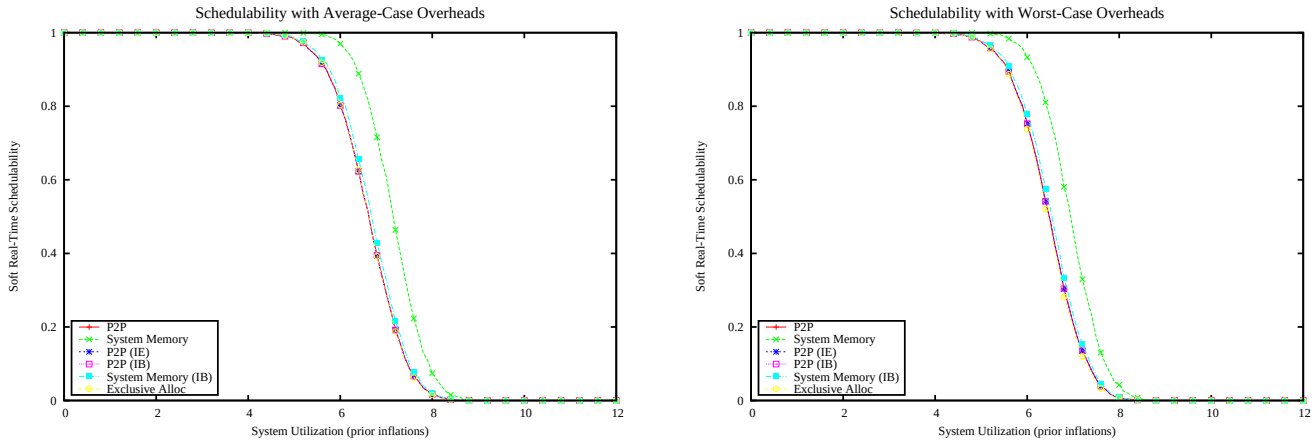

Figure 4652: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

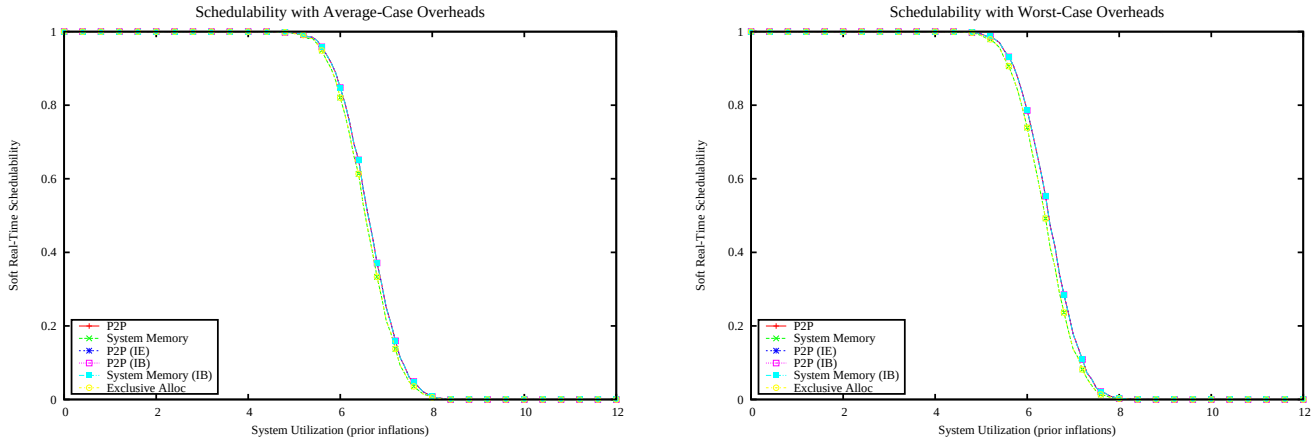

Figure 4653: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

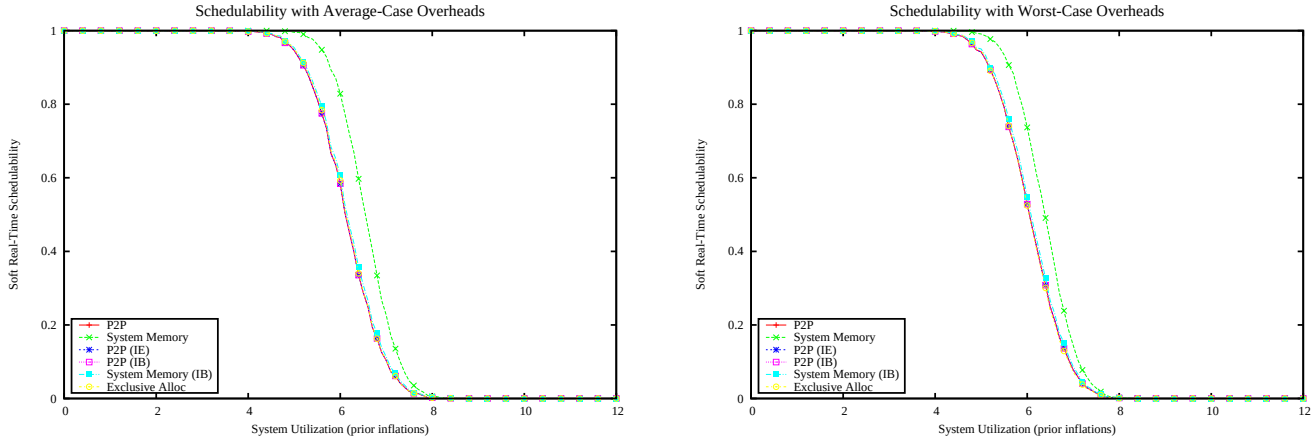

Figure 4654: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

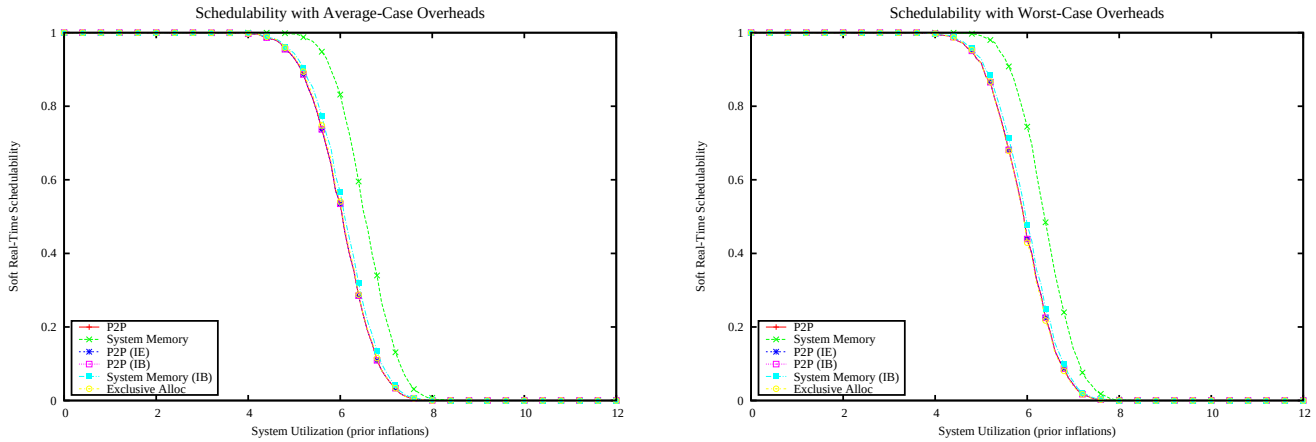

Figure 4655: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

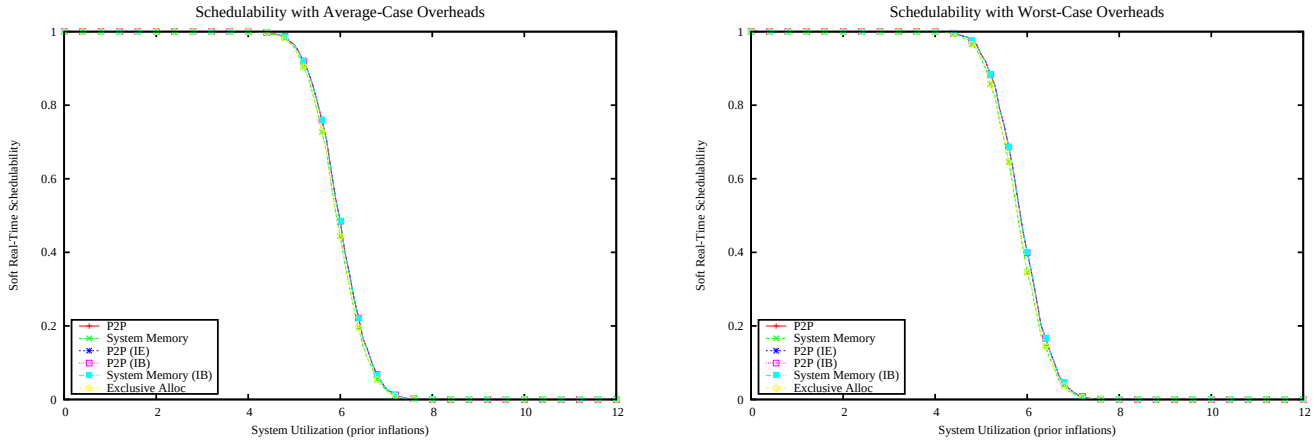

Figure 4656: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

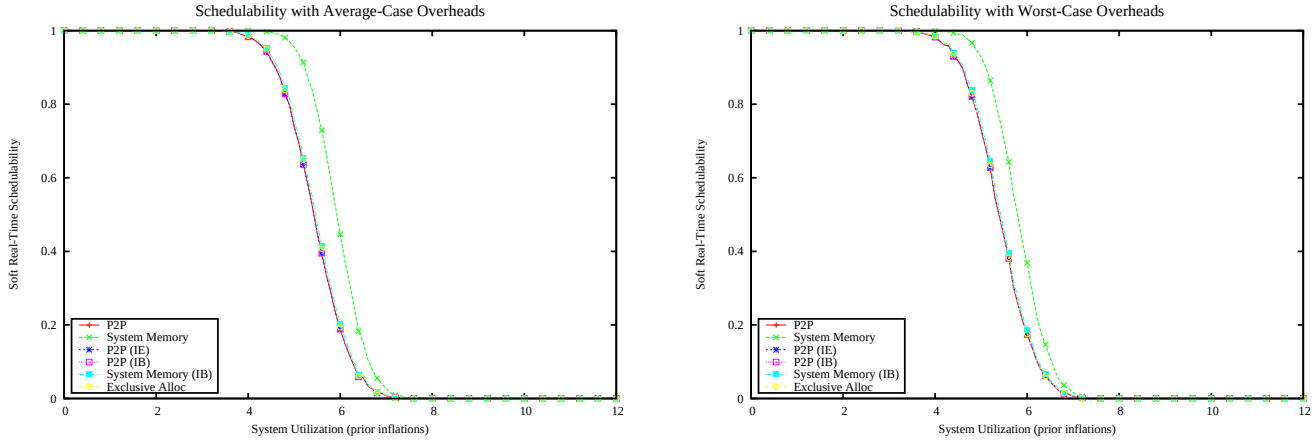

Figure 4657: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

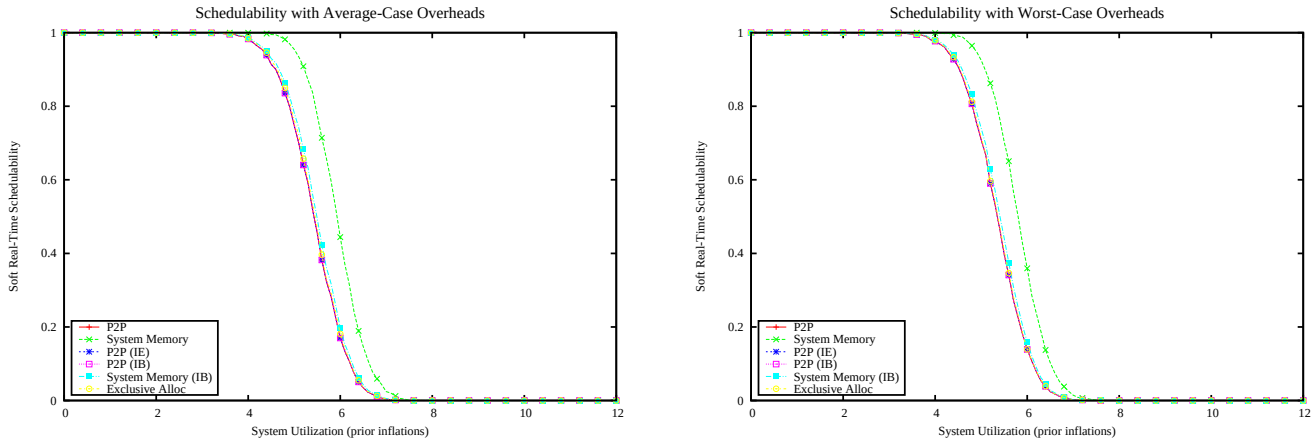

Figure 4658: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

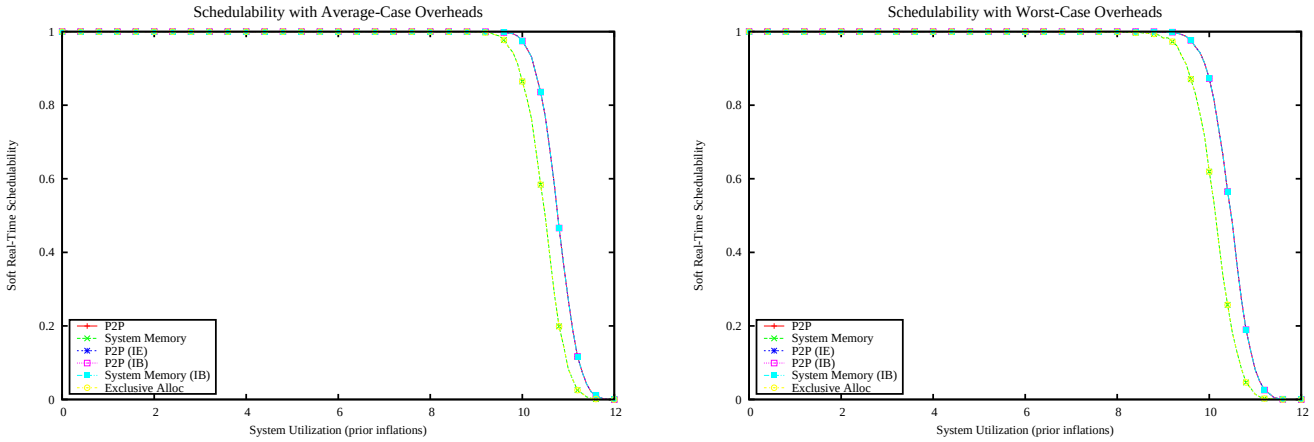

Figure 4659: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

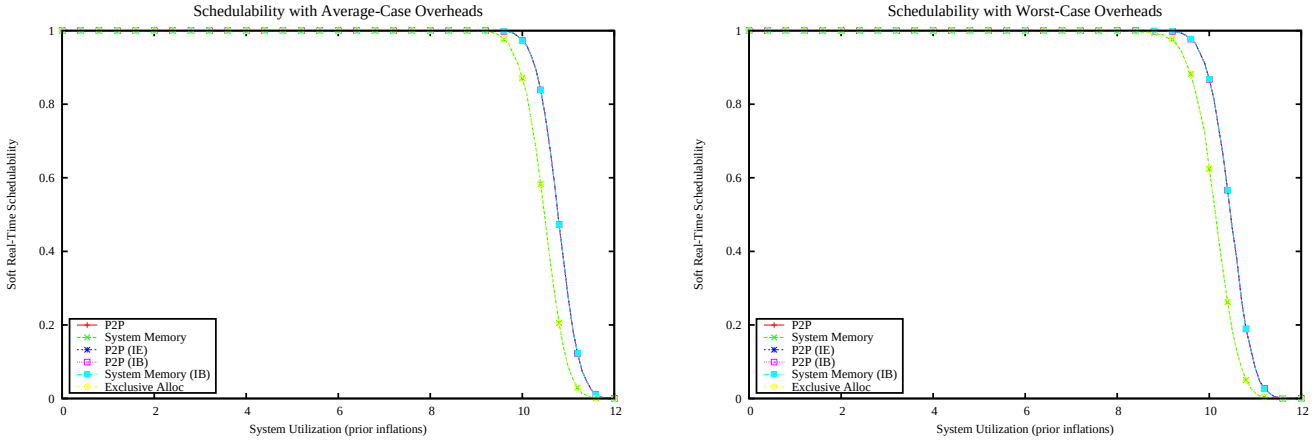

Figure 4660: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

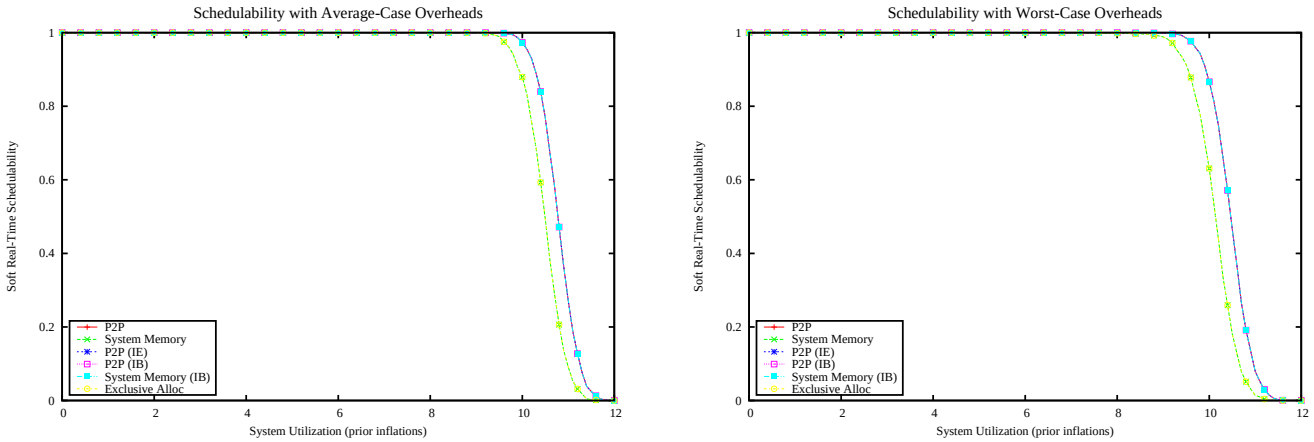

Figure 4661: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

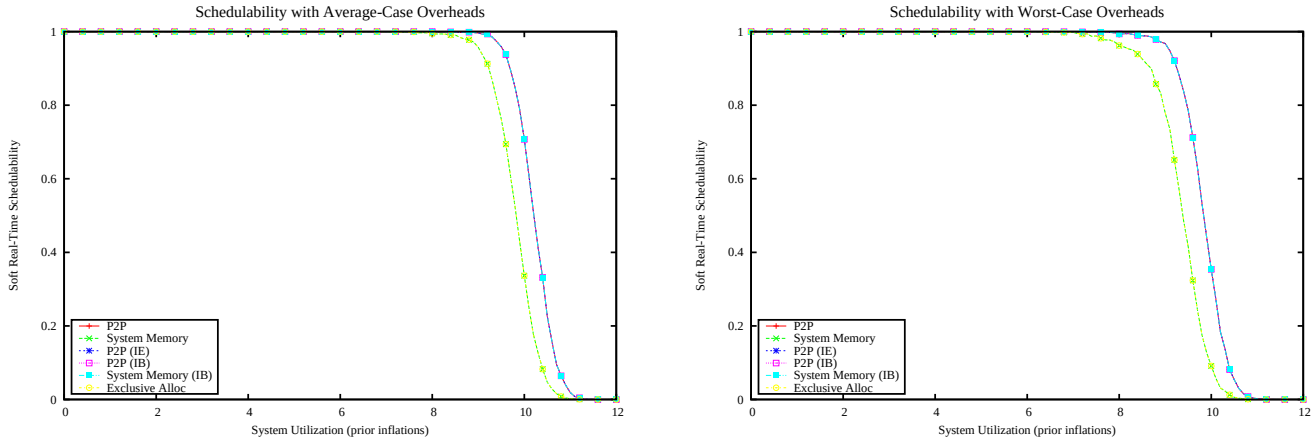

Figure 4662: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

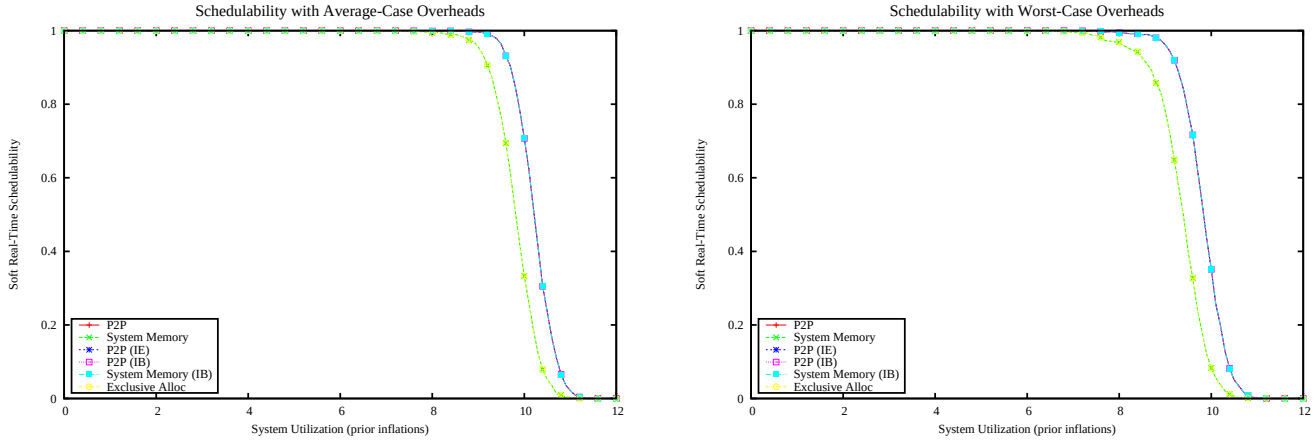

Figure 4663: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

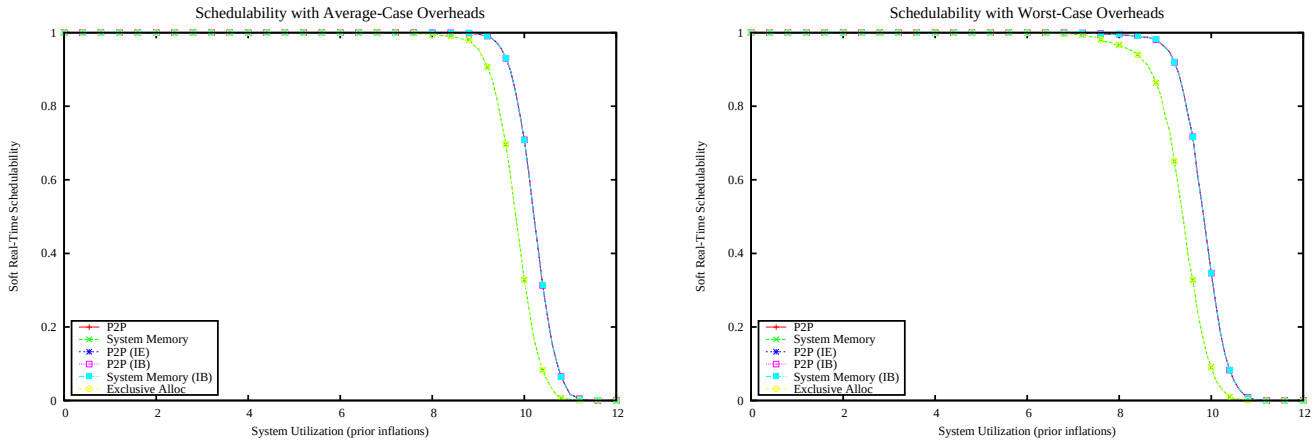

Figure 4664: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

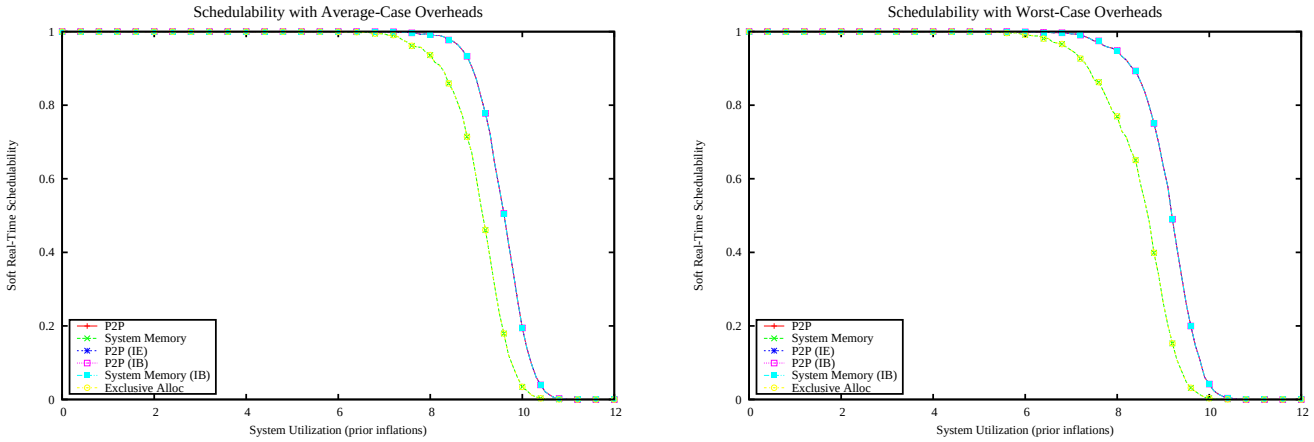

Figure 4665: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

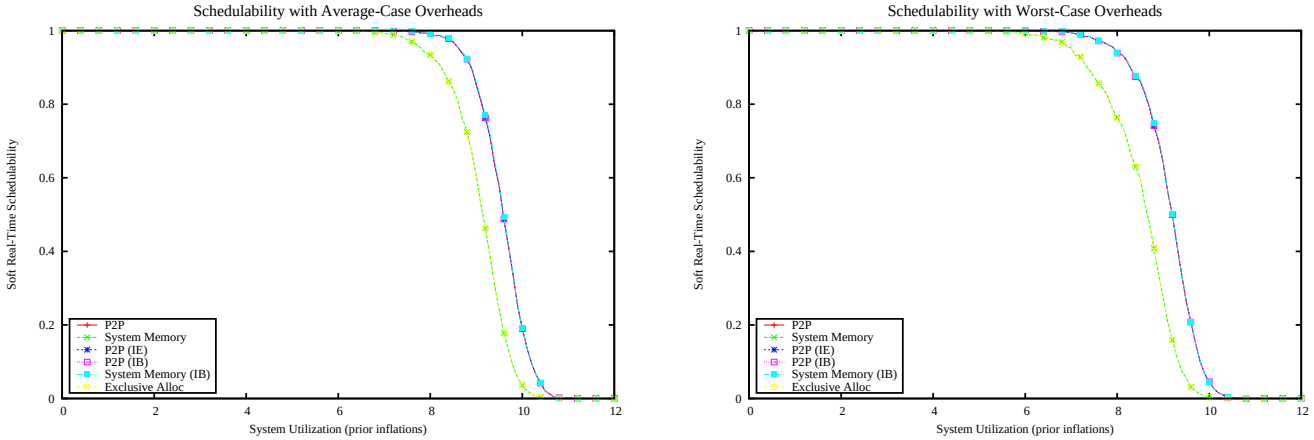

Figure 4666: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

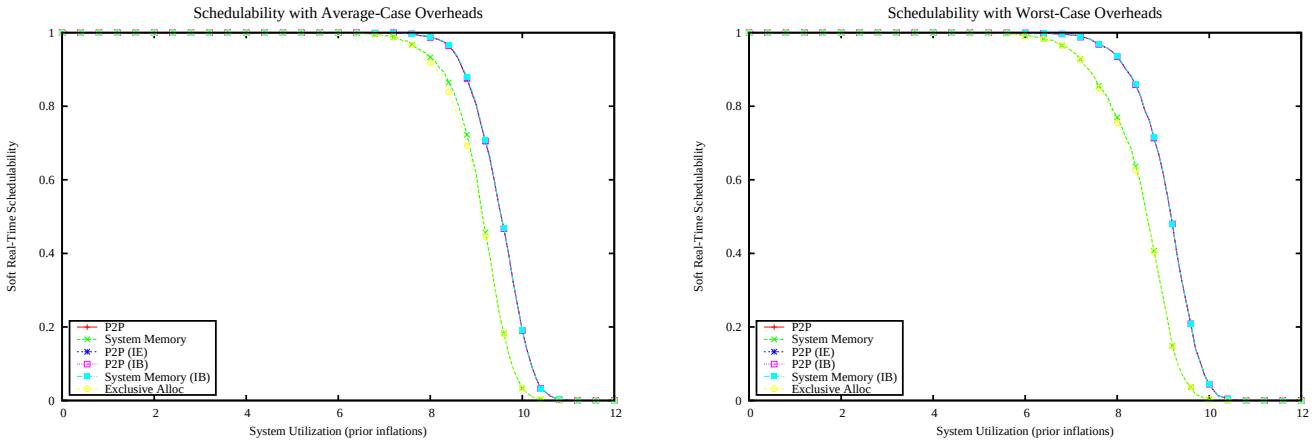

Figure 4667: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

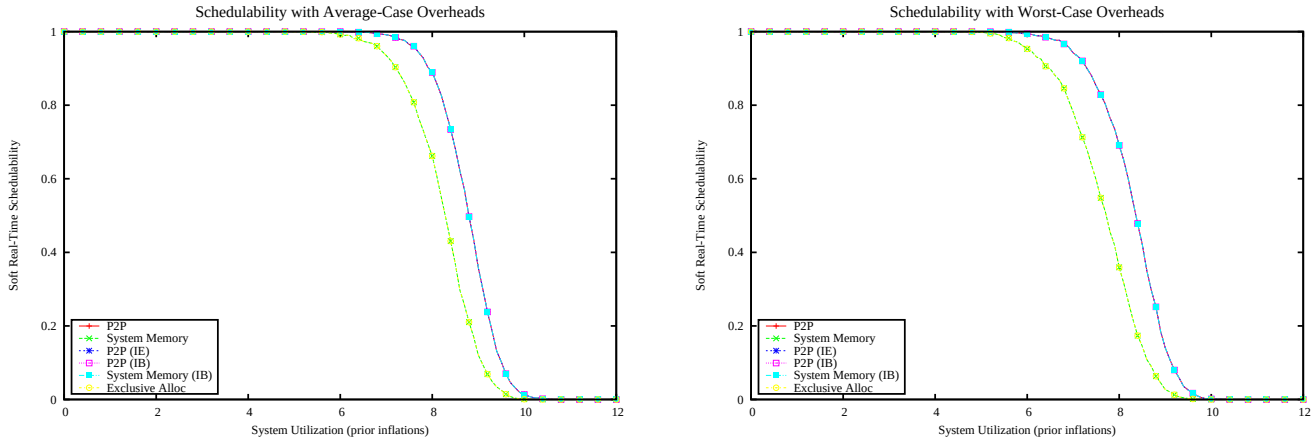

Figure 4668: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

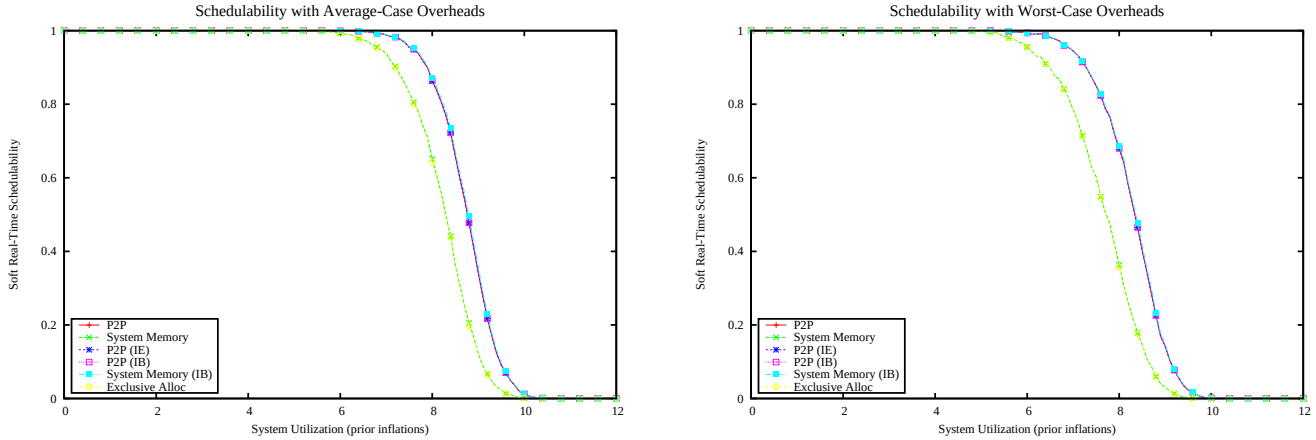

Figure 4669: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

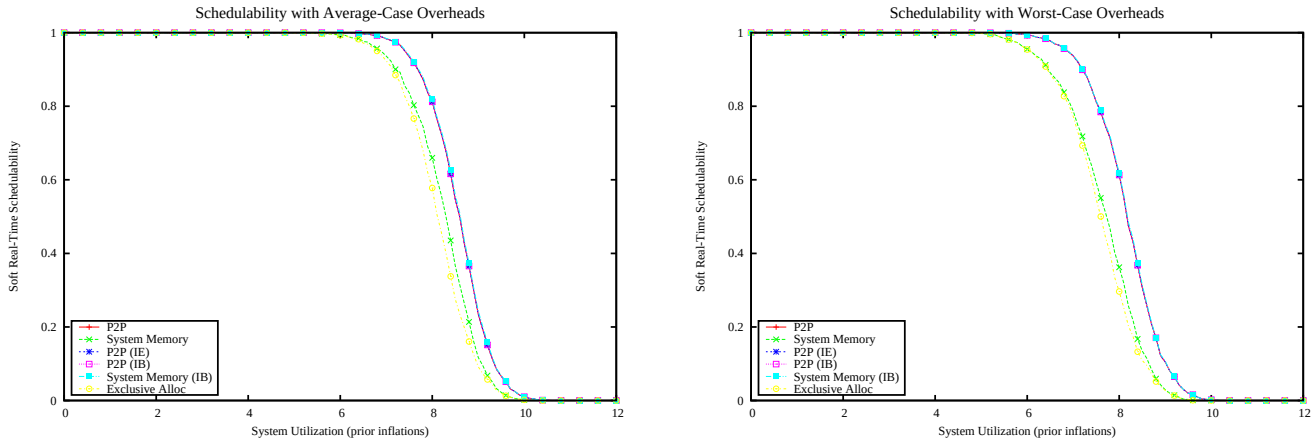

Figure 4670: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

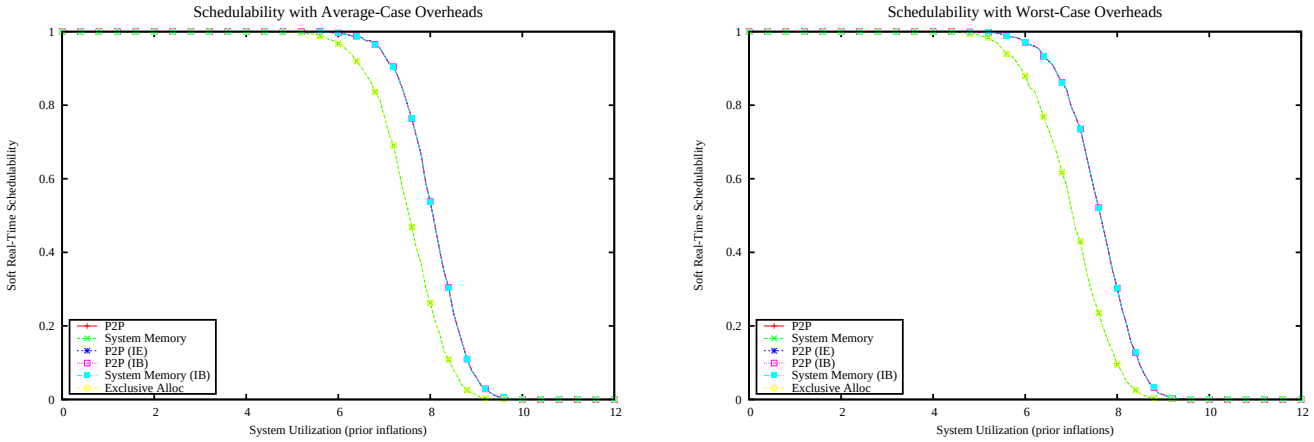

Figure 4671: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

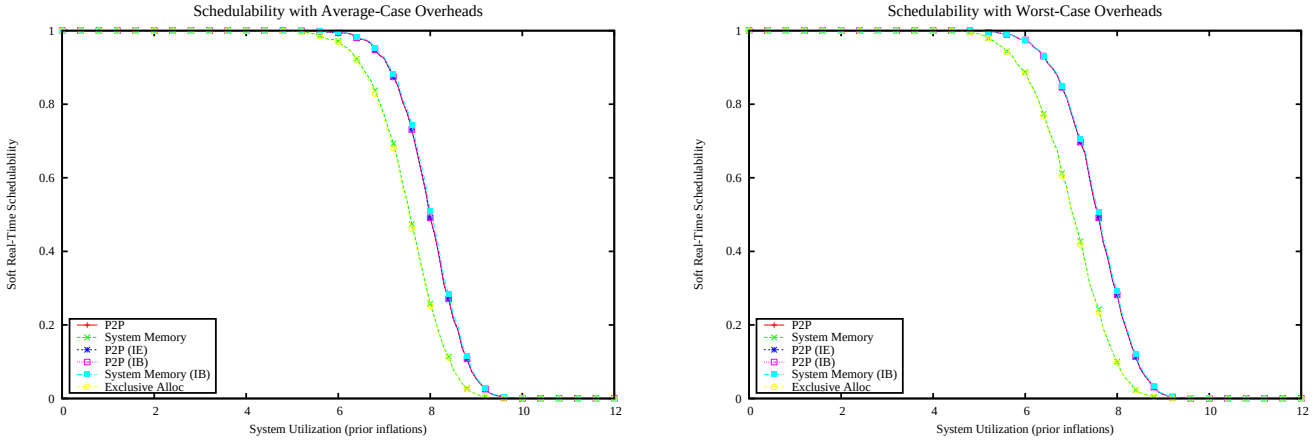

Figure 4672: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

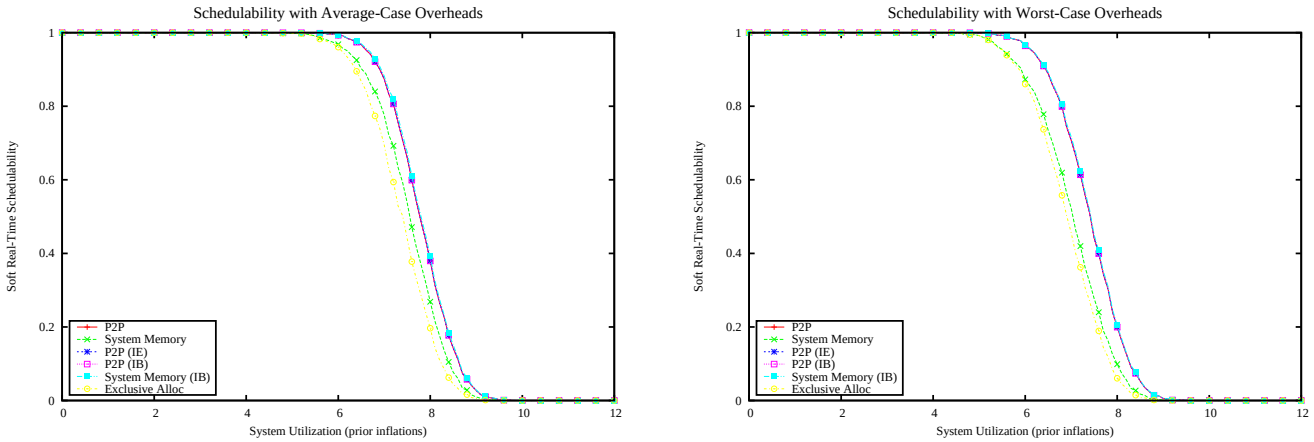

Figure 4673: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

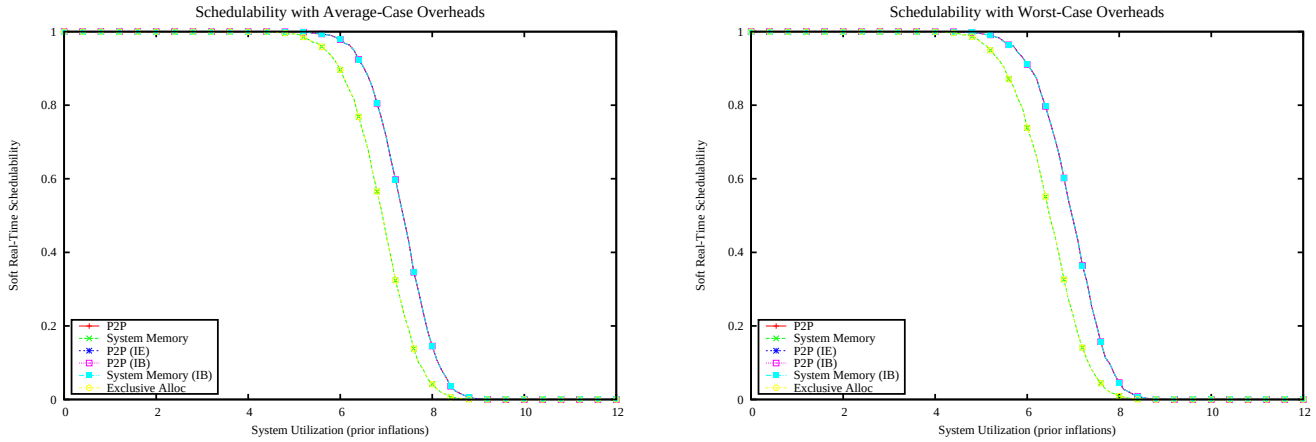

Figure 4674: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

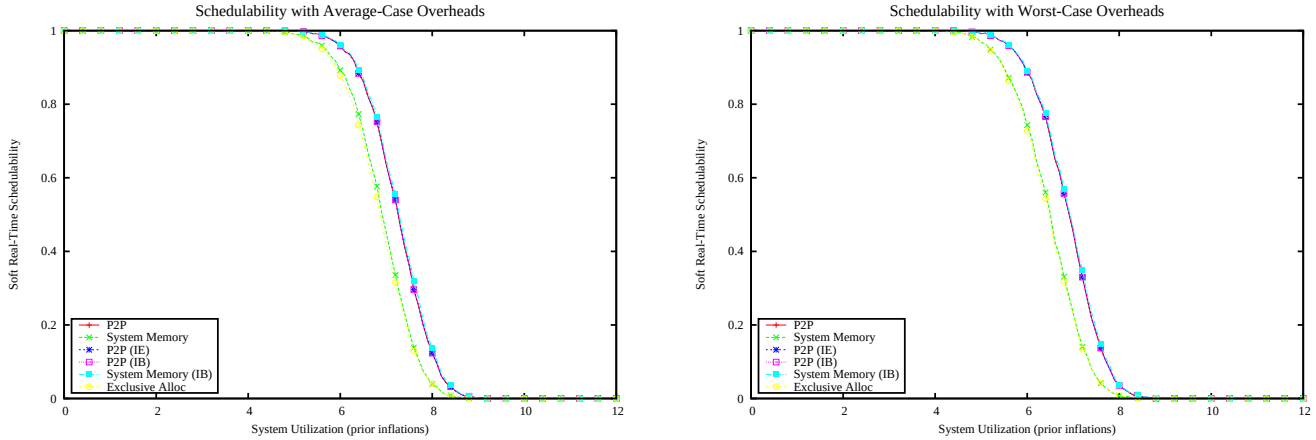

Figure 4675: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

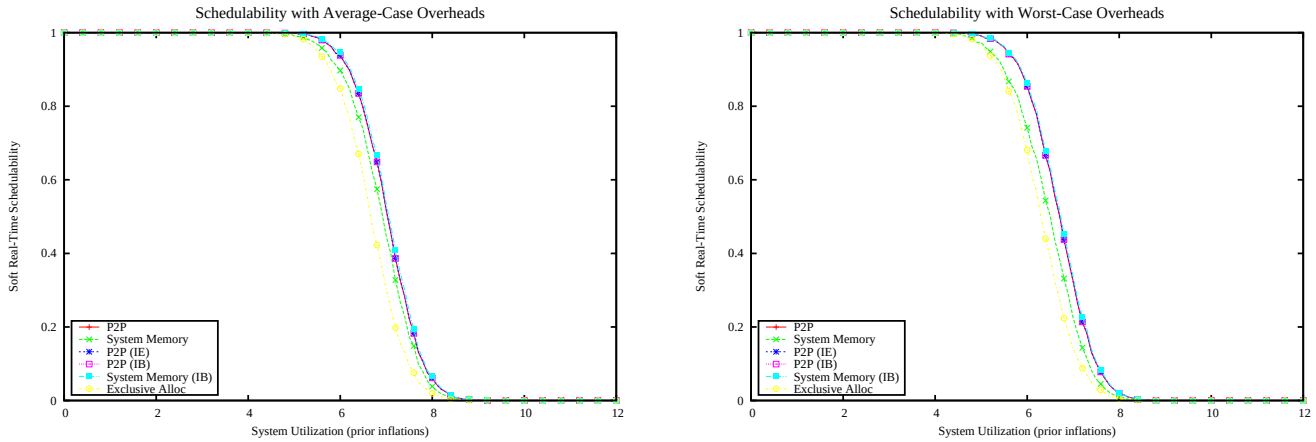

Figure 4676: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

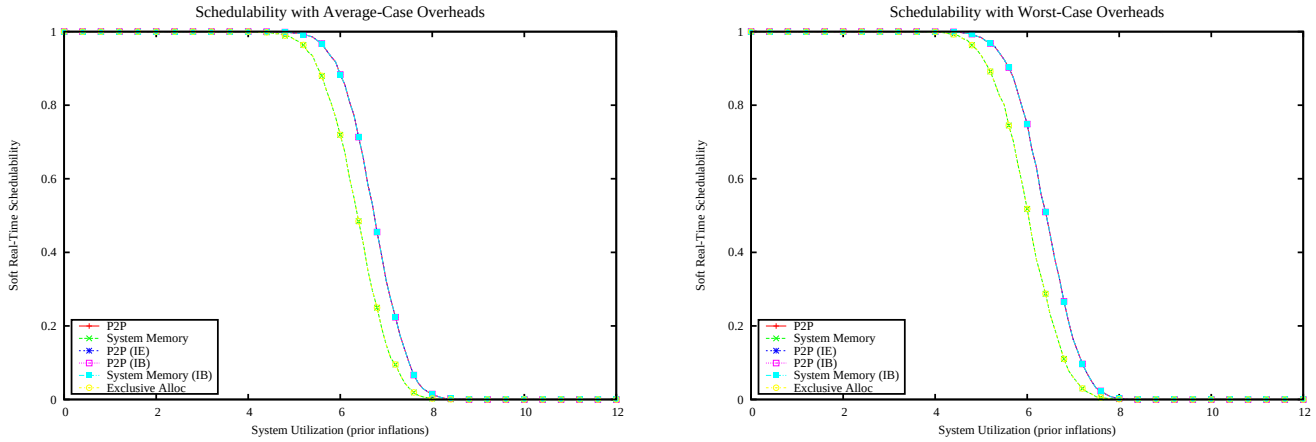

Figure 4677: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

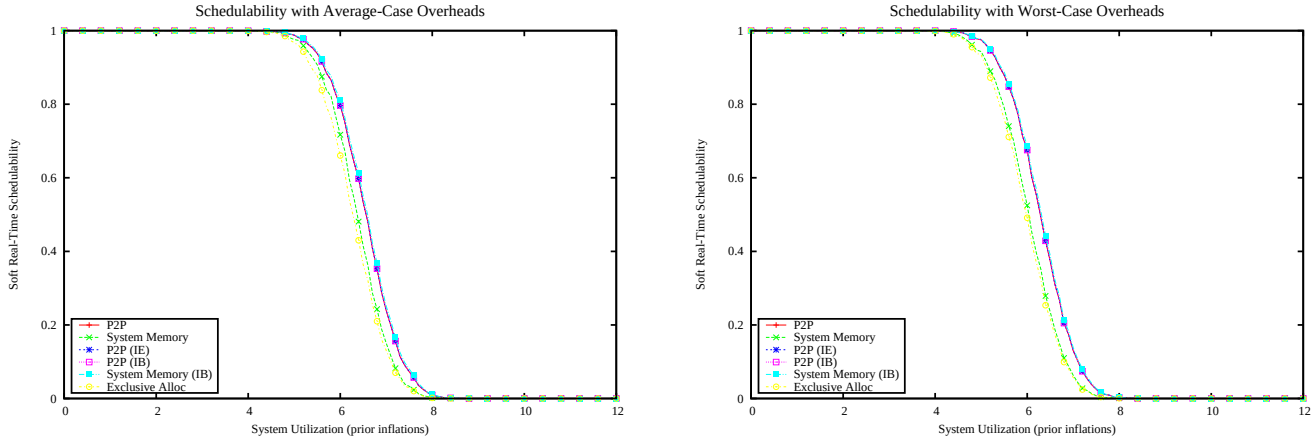

Figure 4678: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

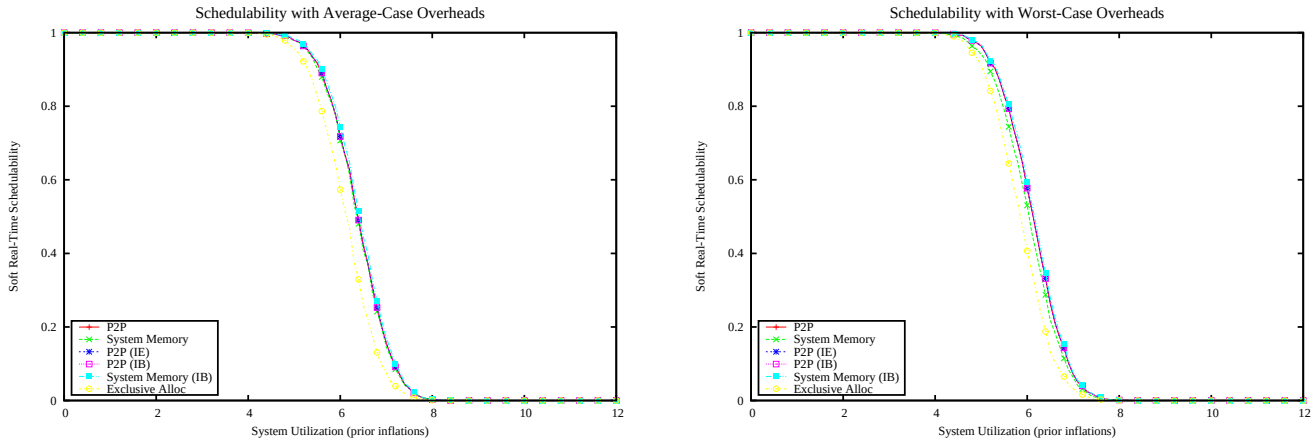

Figure 4679: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

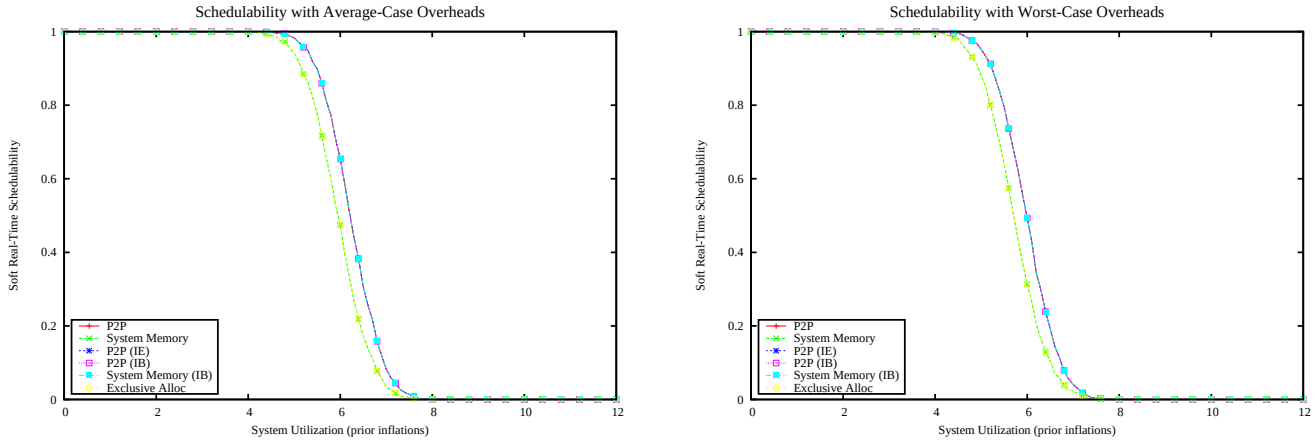

Figure 4680: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

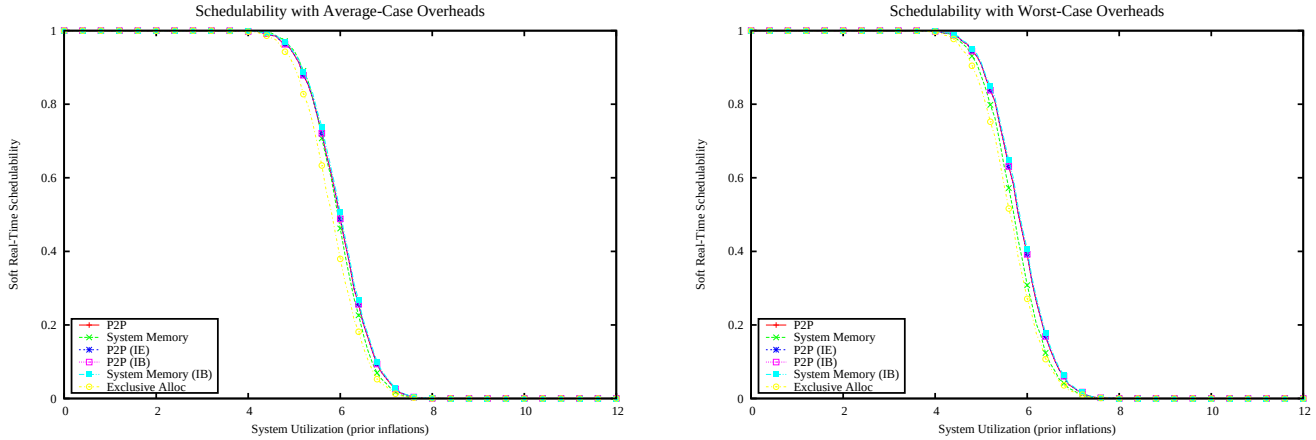

Figure 4681: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

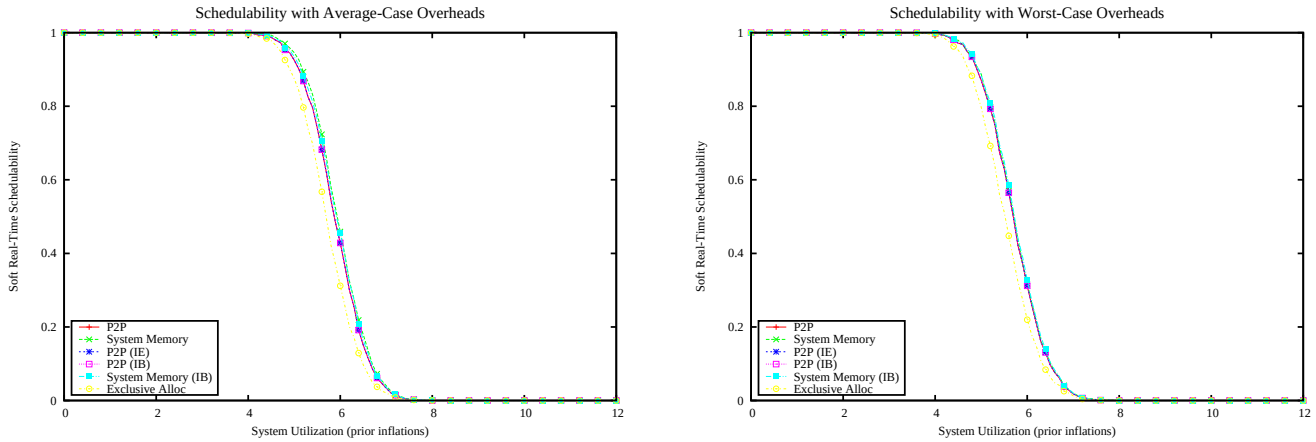

Figure 4682: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

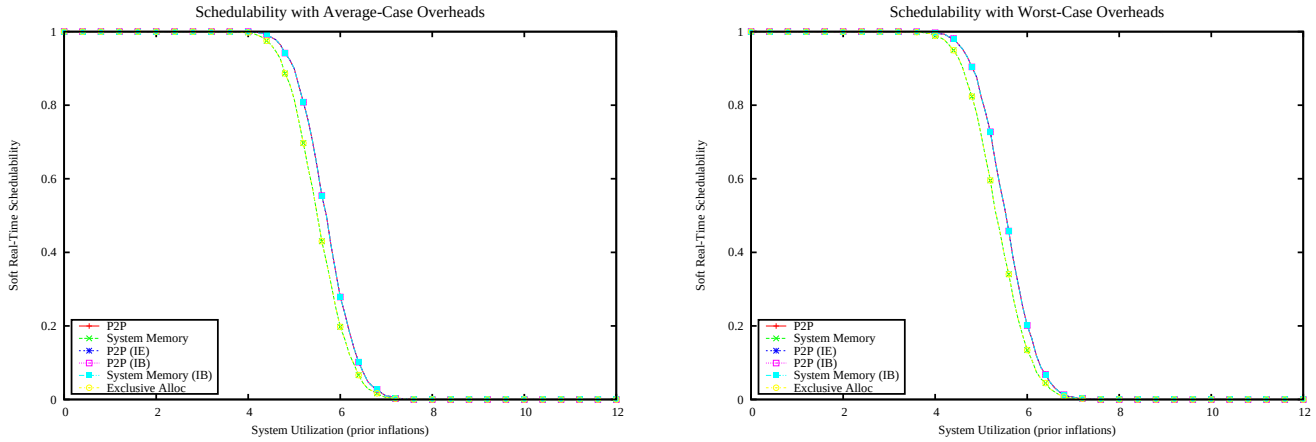

Figure 4683: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

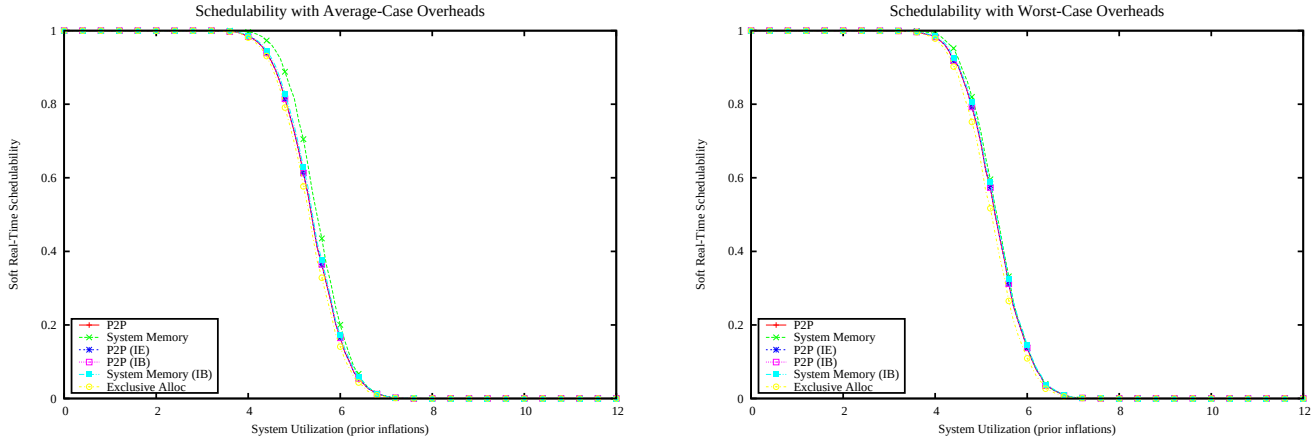

Figure 4684: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

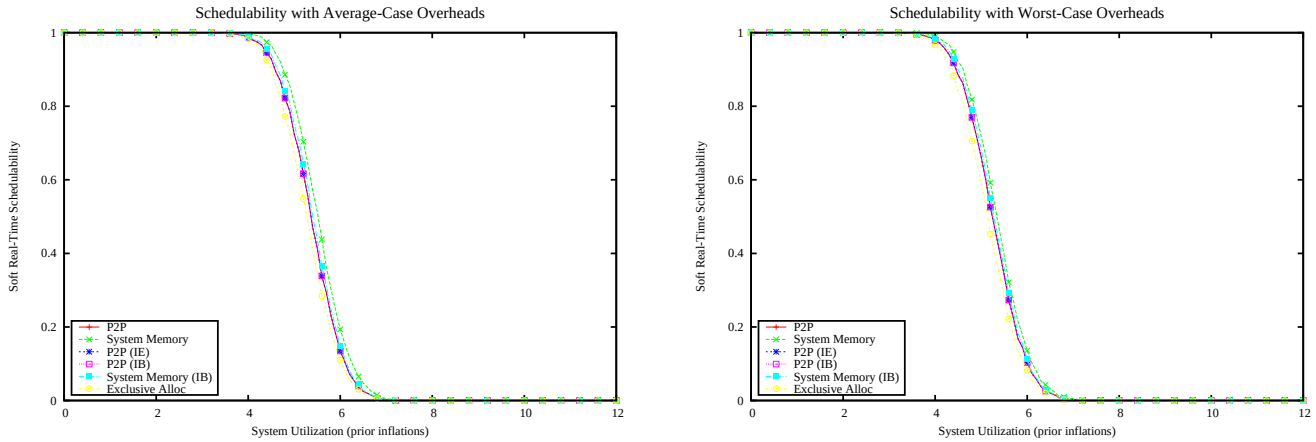

Figure 4685: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

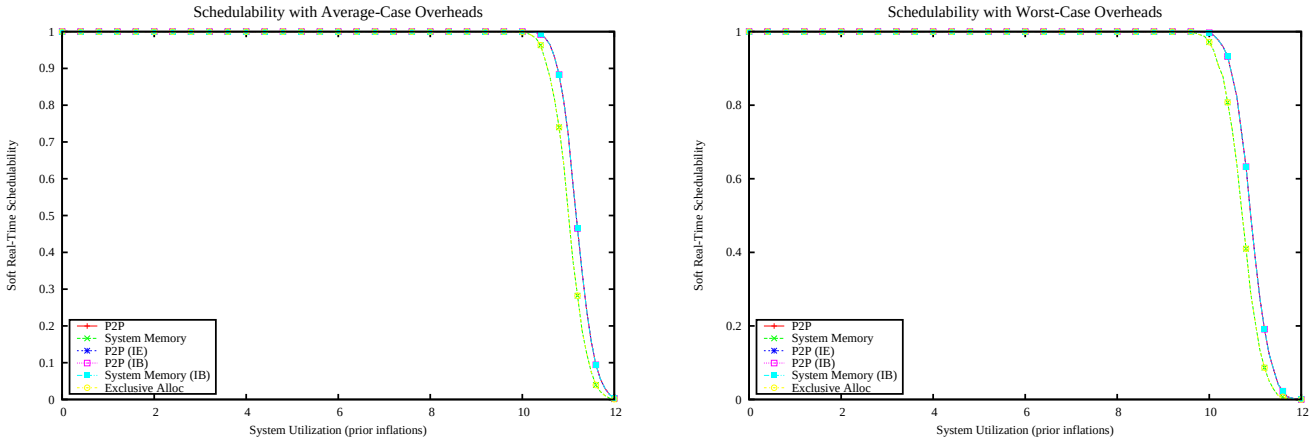

Figure 4686: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

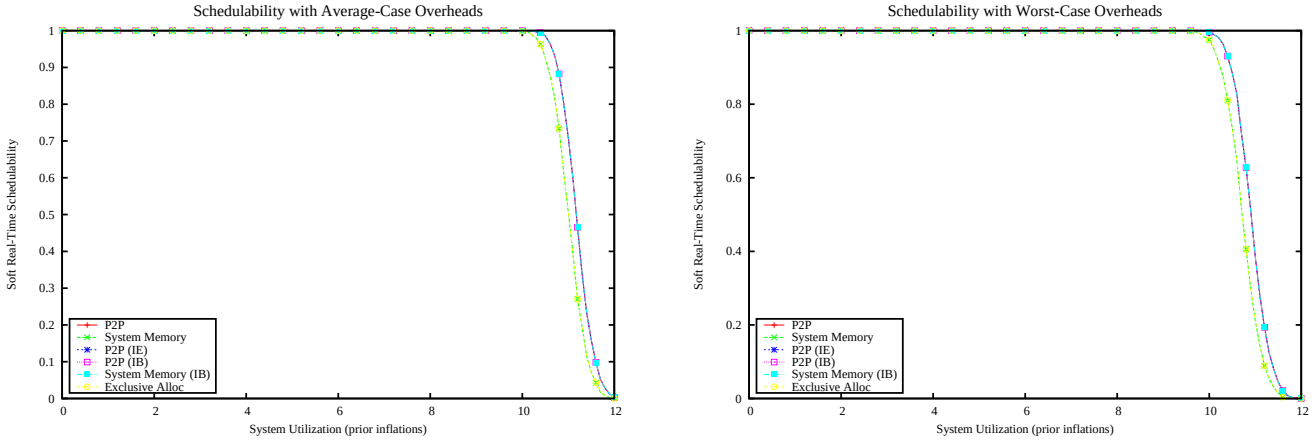

Figure 4687: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

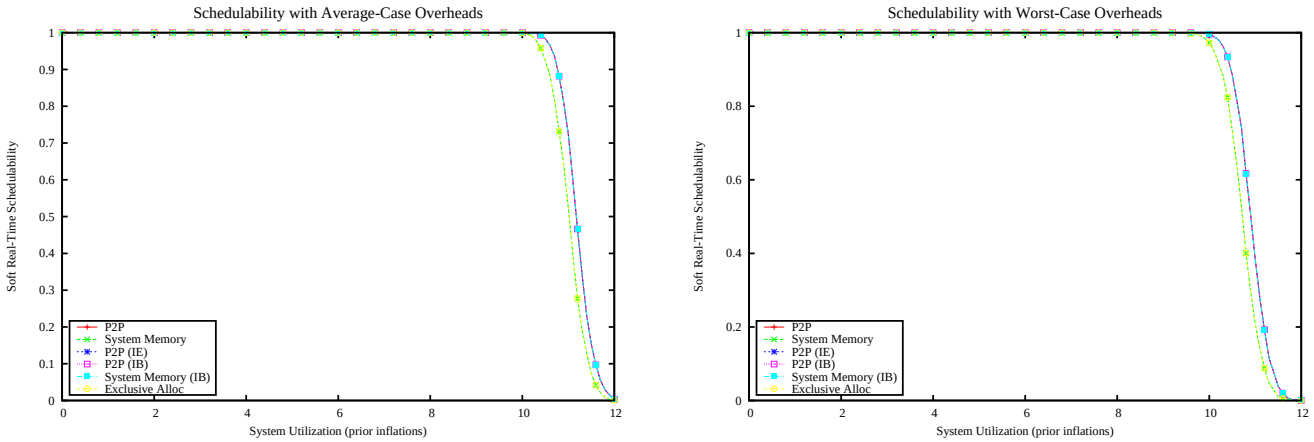

Figure 4688: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

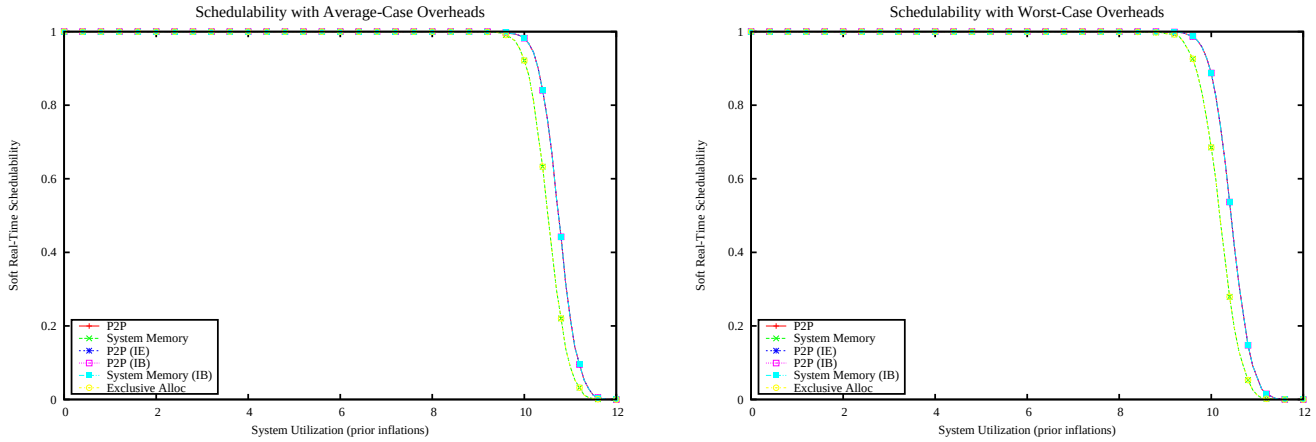

Figure 4689: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

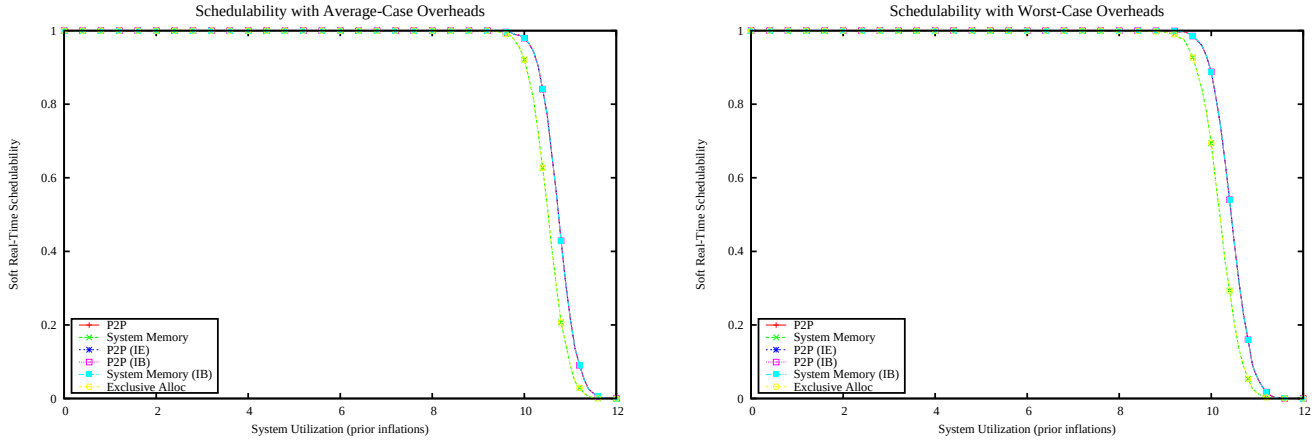

Figure 4690: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

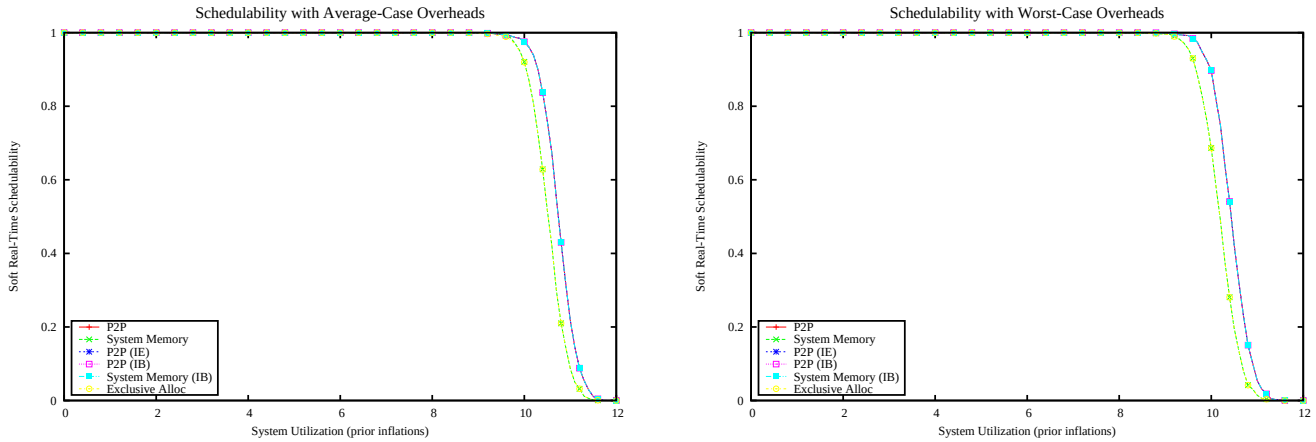

Figure 4691: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

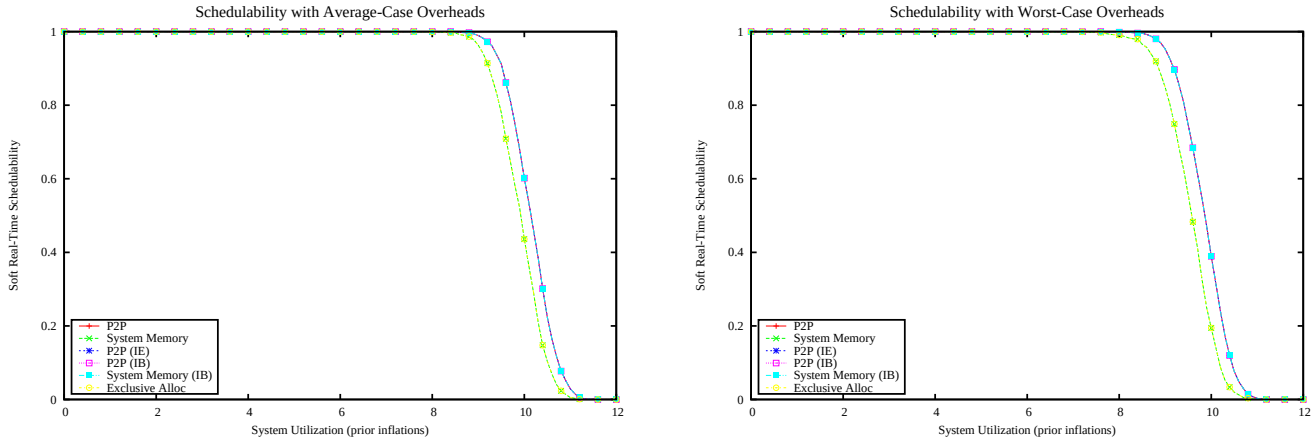

Figure 4692: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

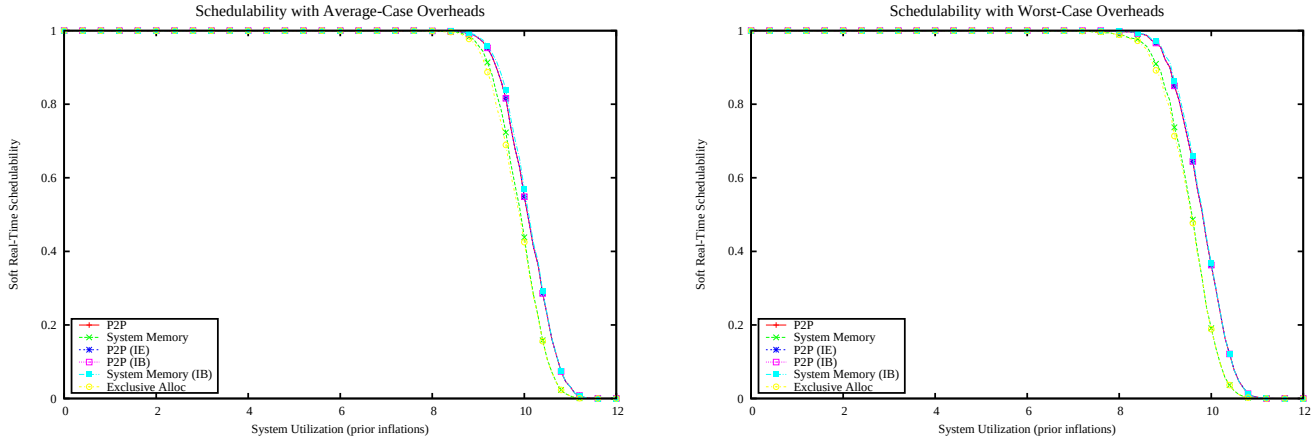

Figure 4693: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

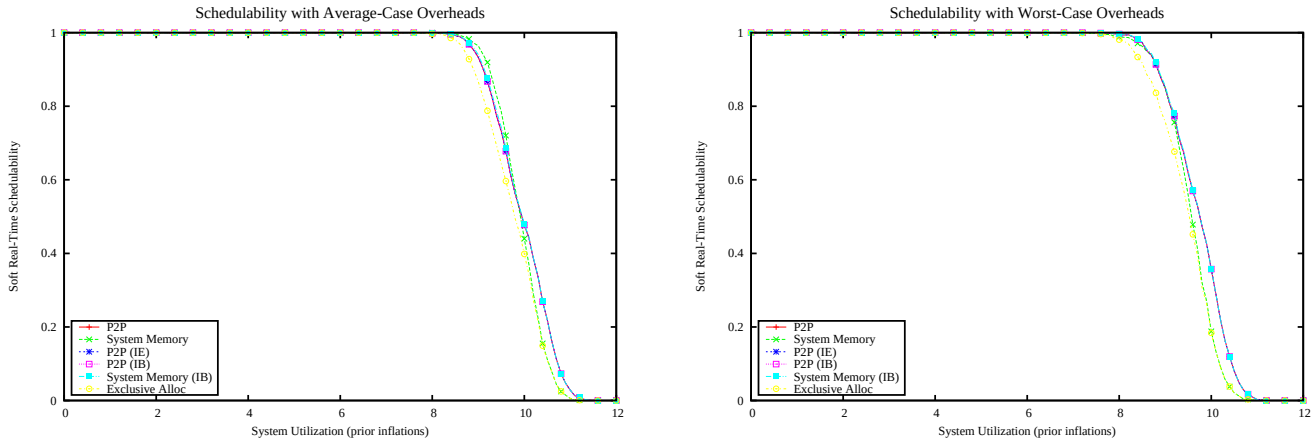

Figure 4694: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

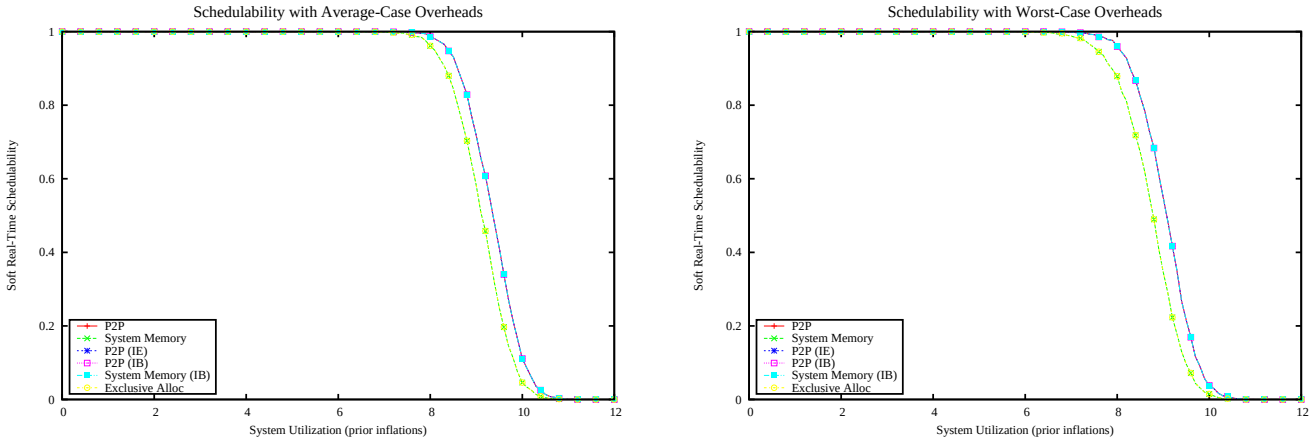

Figure 4695: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

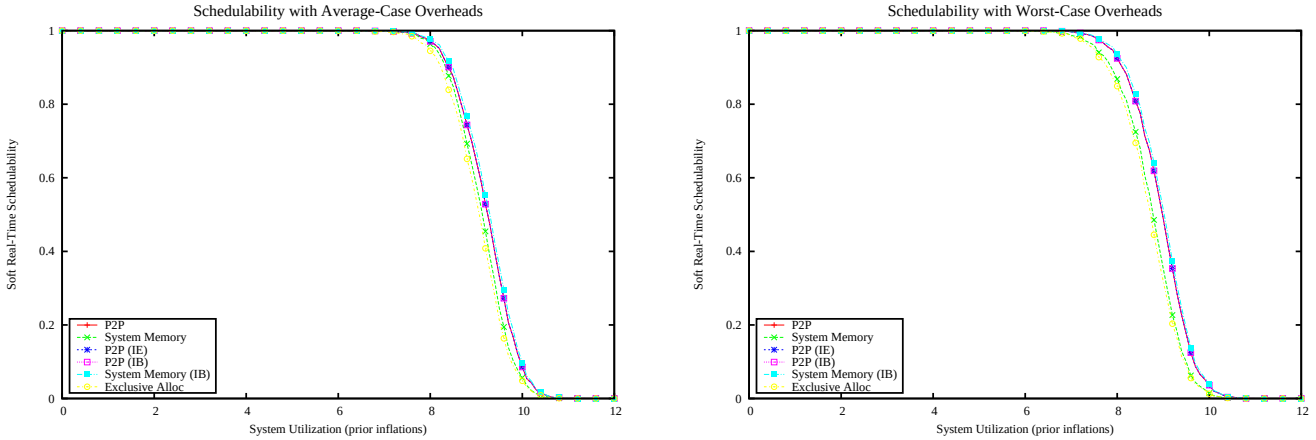

Figure 4696: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

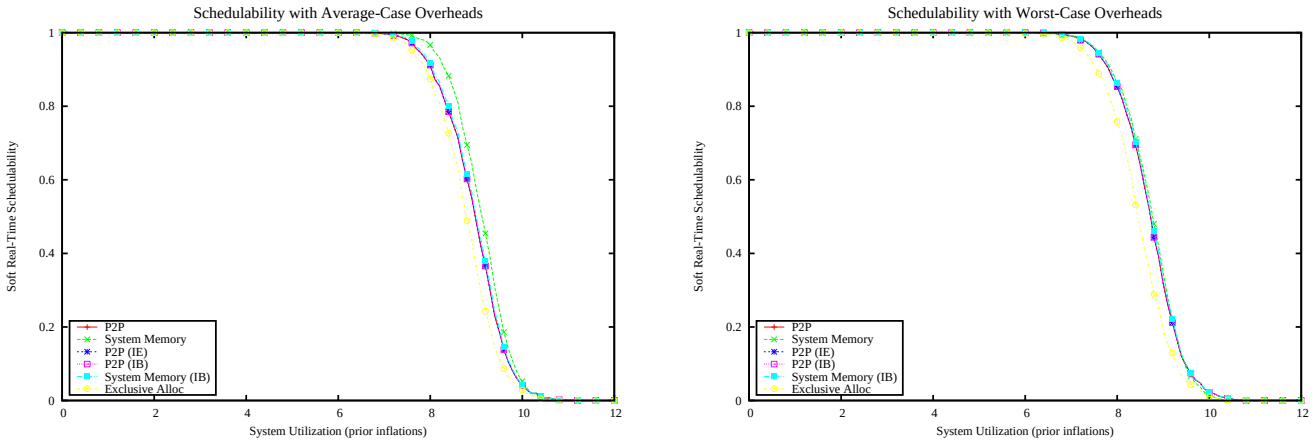

Figure 4697: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

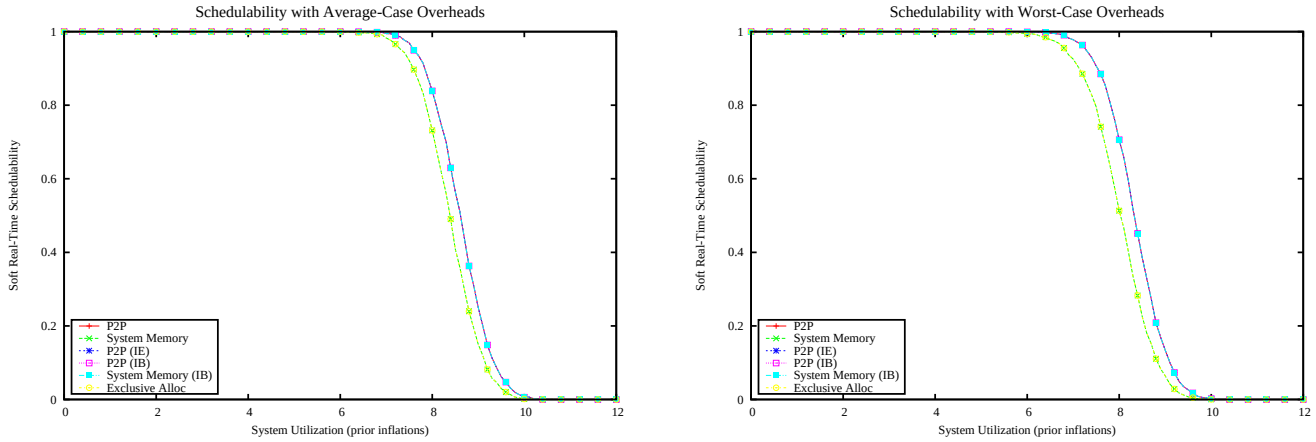

Figure 4698: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

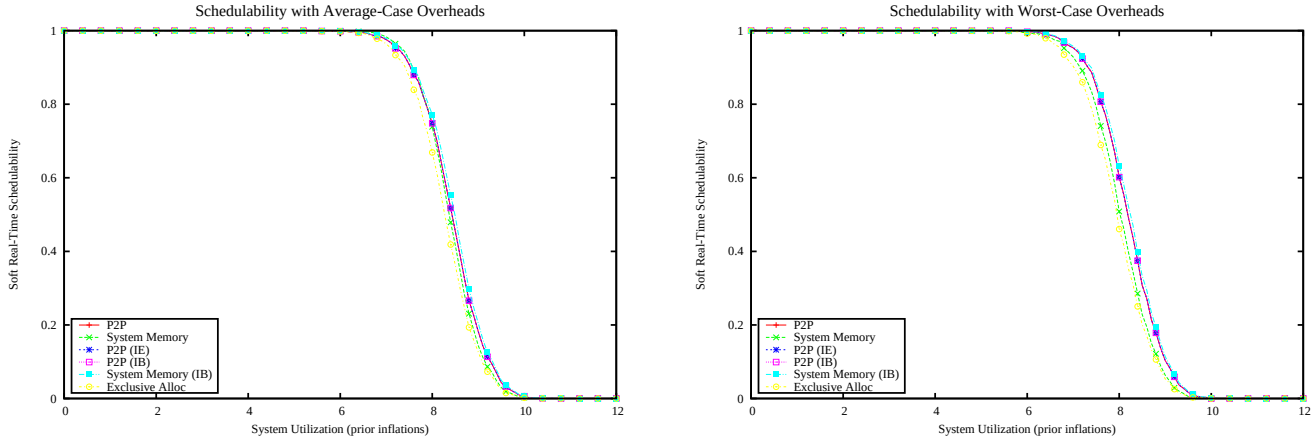

Figure 4699: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

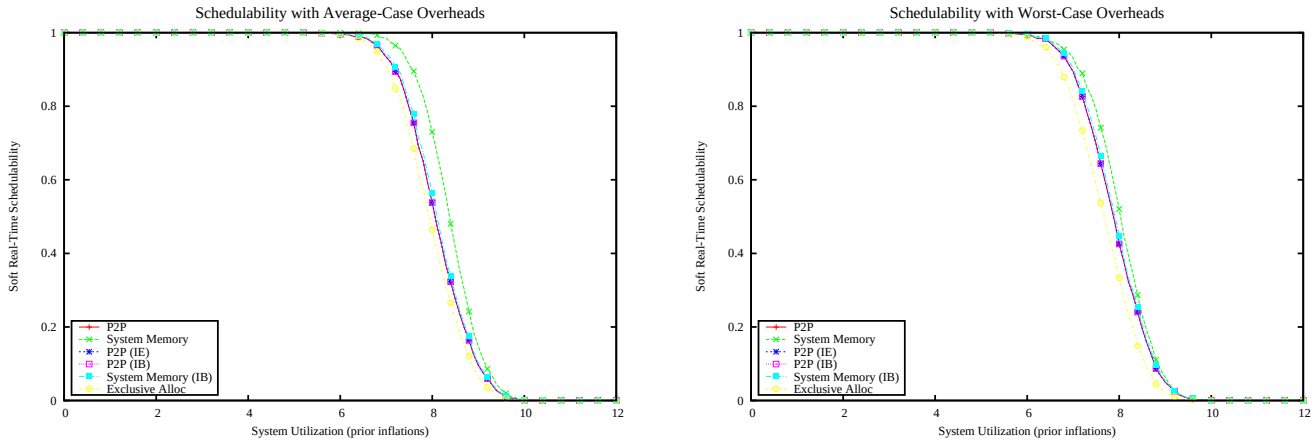

Figure 4700: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

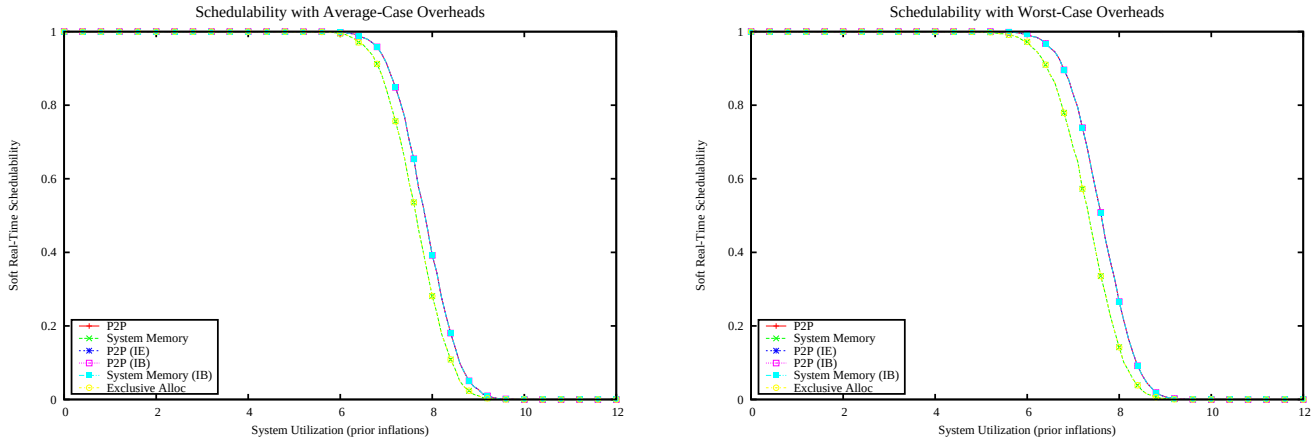

Figure 4701: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

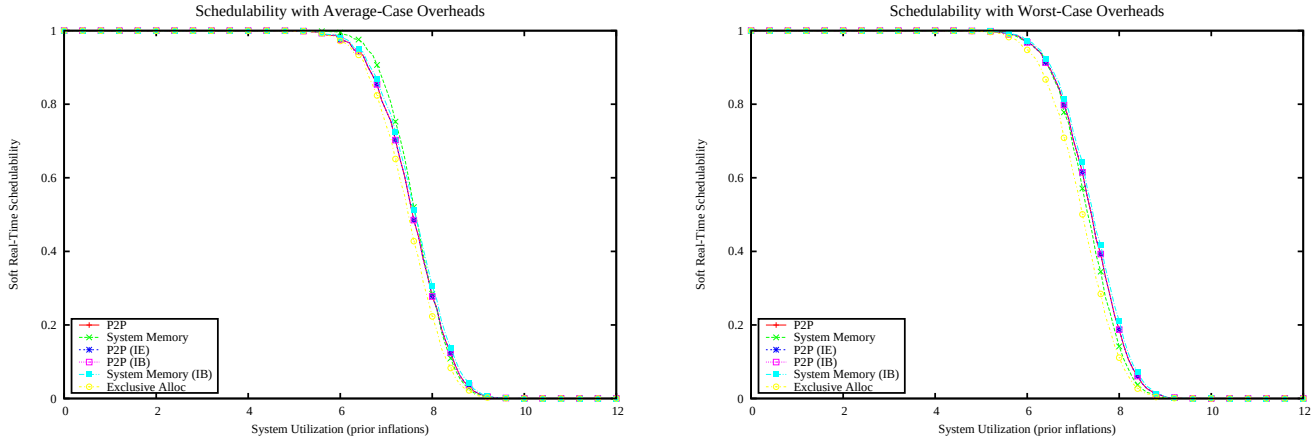

Figure 4702: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

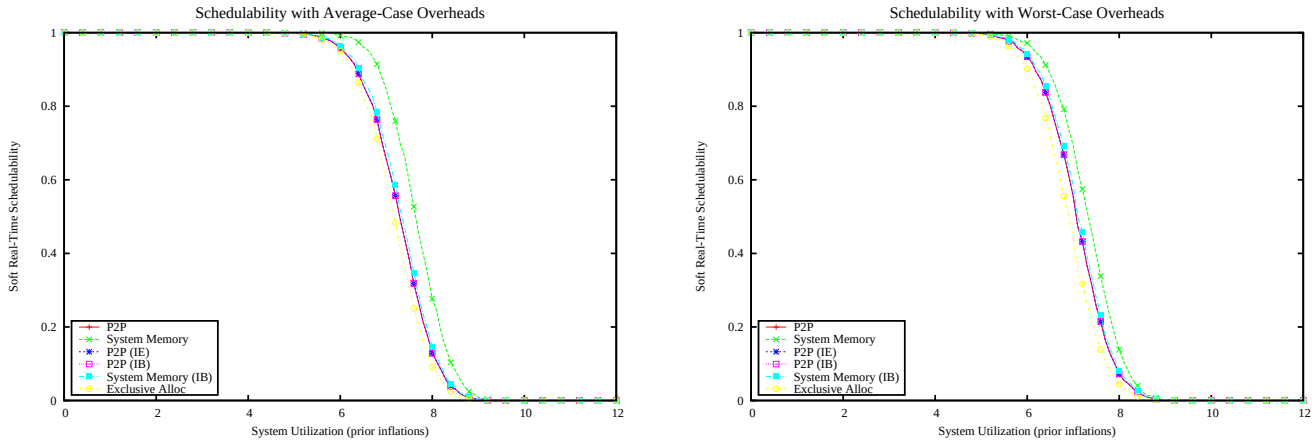

Figure 4703: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

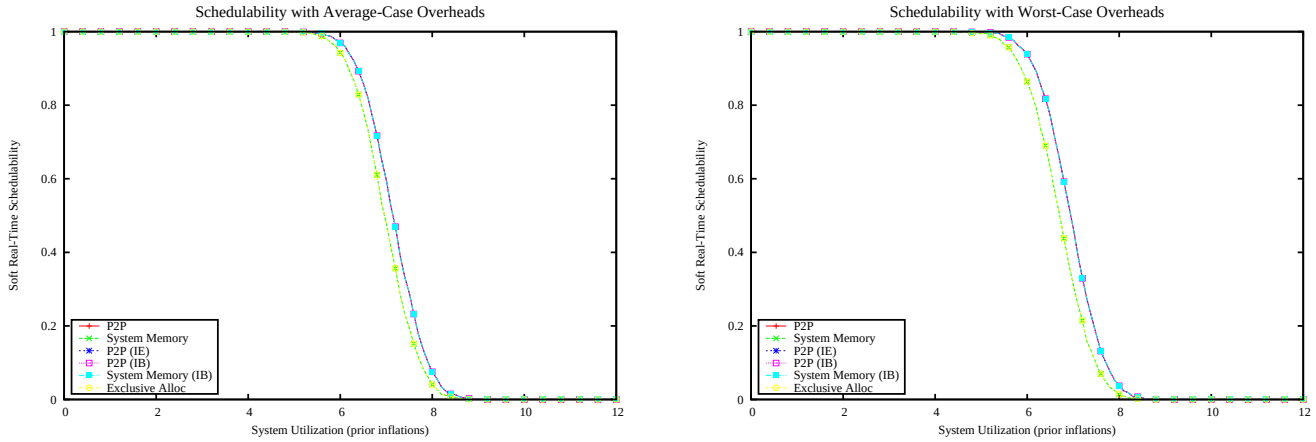

Figure 4704: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

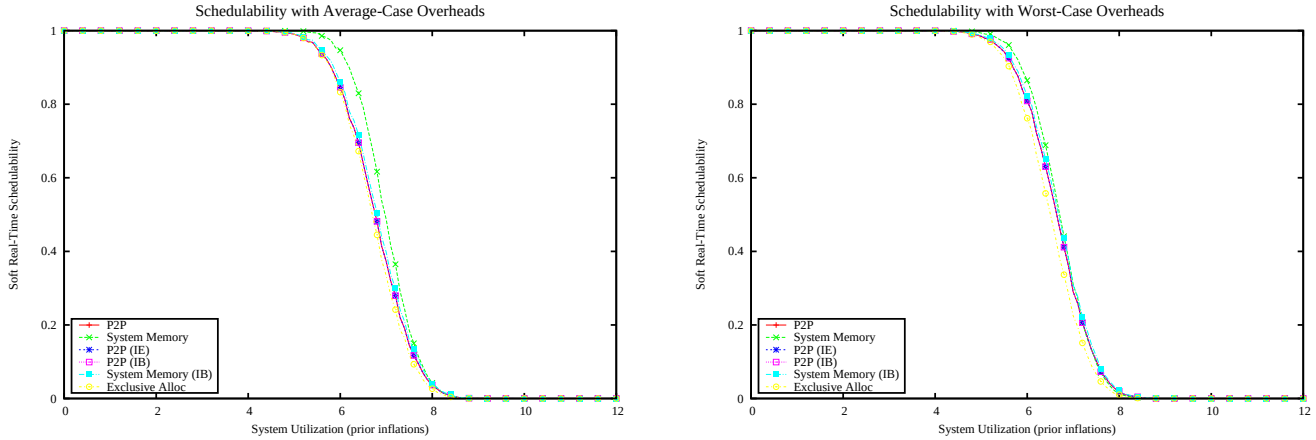

Figure 4705: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

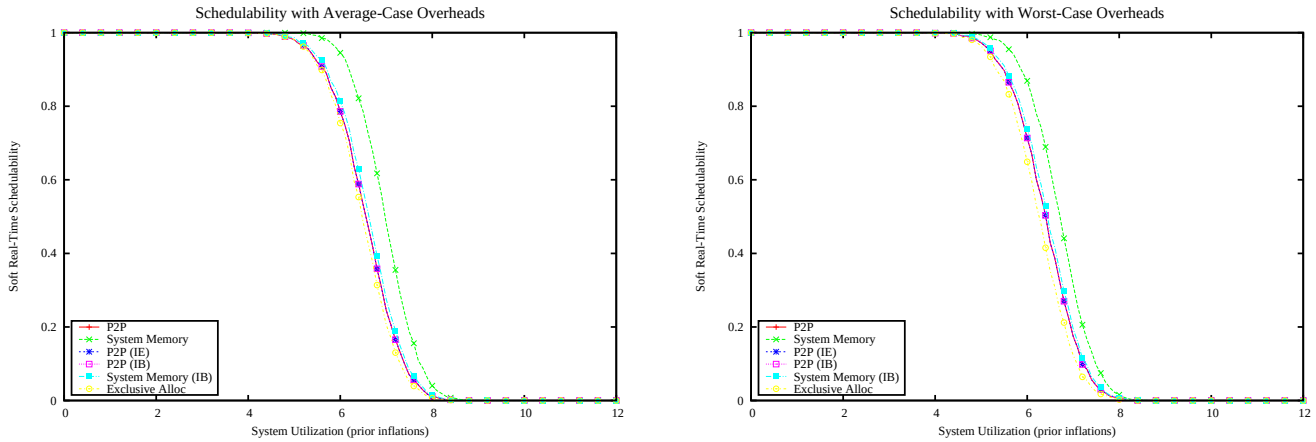

Figure 4706: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

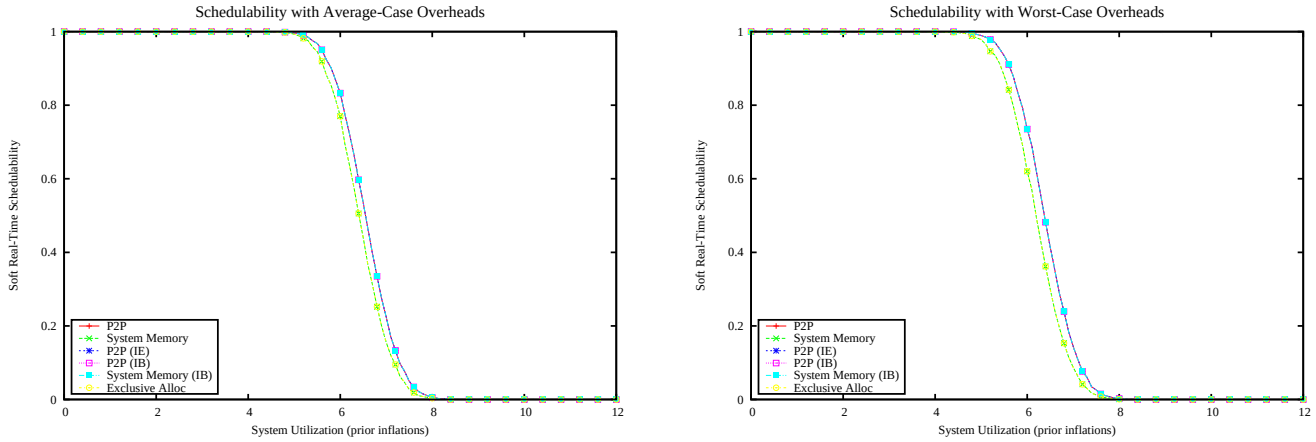

Figure 4707: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

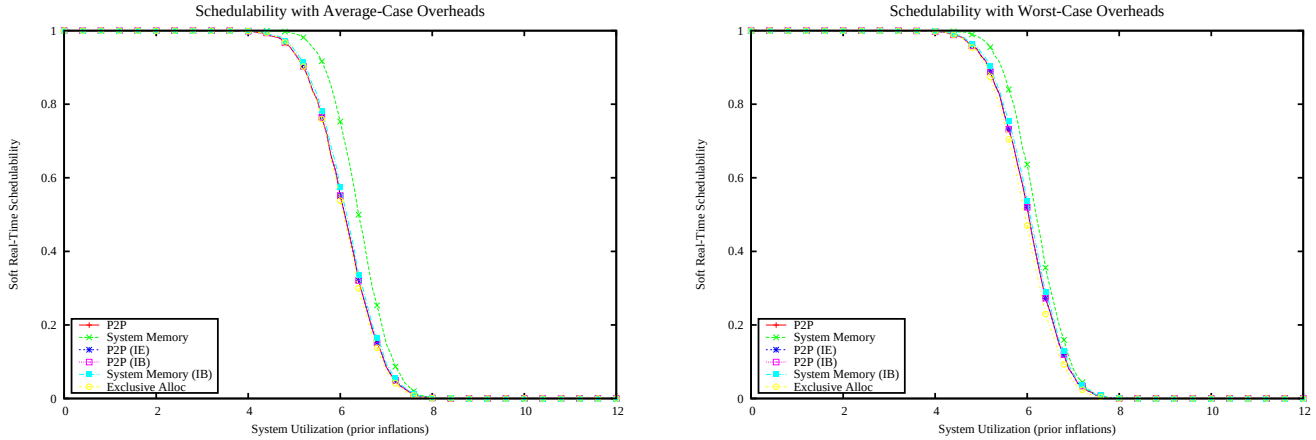

Figure 4708: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

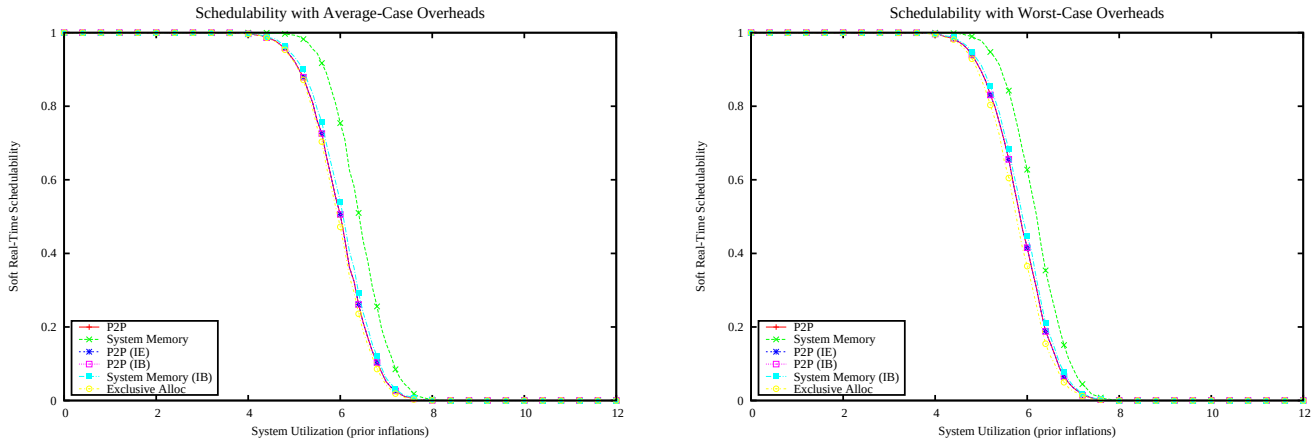

Figure 4709: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

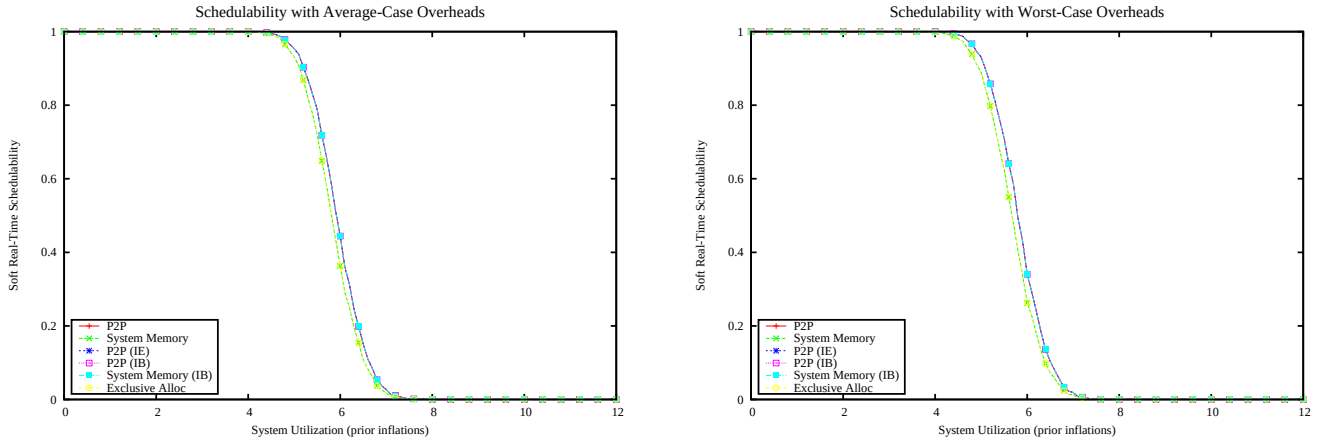

Figure 4710: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

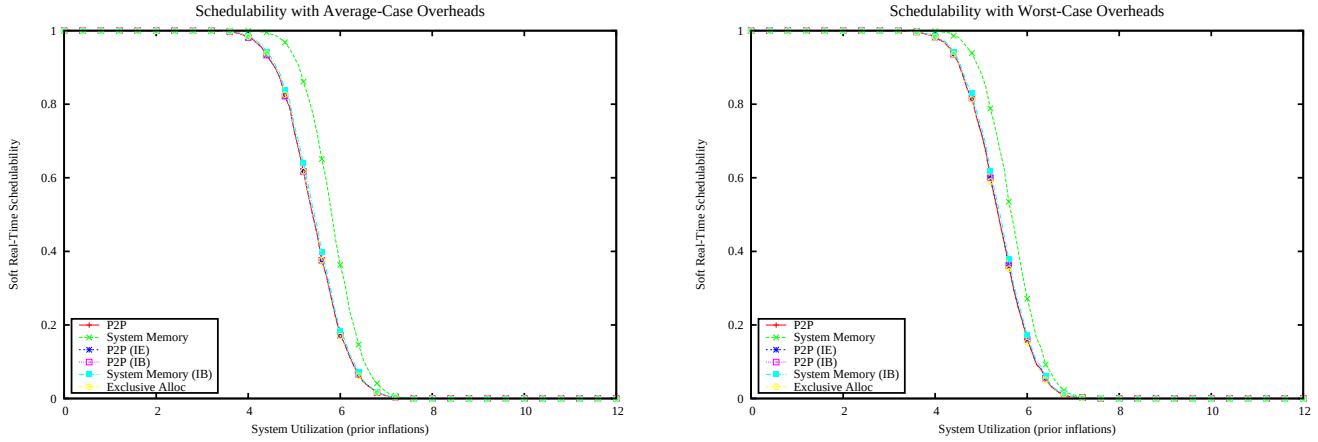

Figure 4711: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

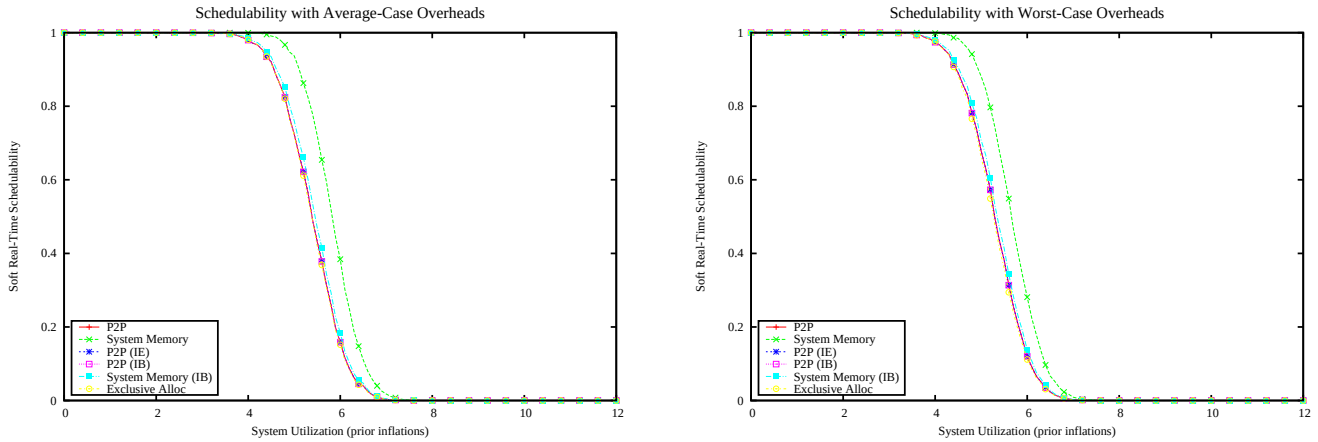

Figure 4712: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

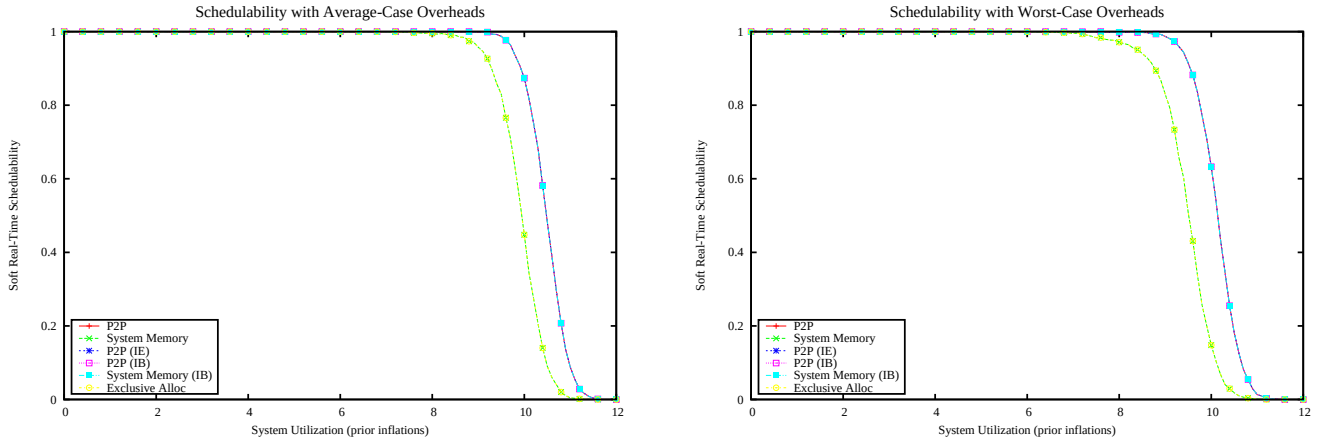

Figure 4713: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

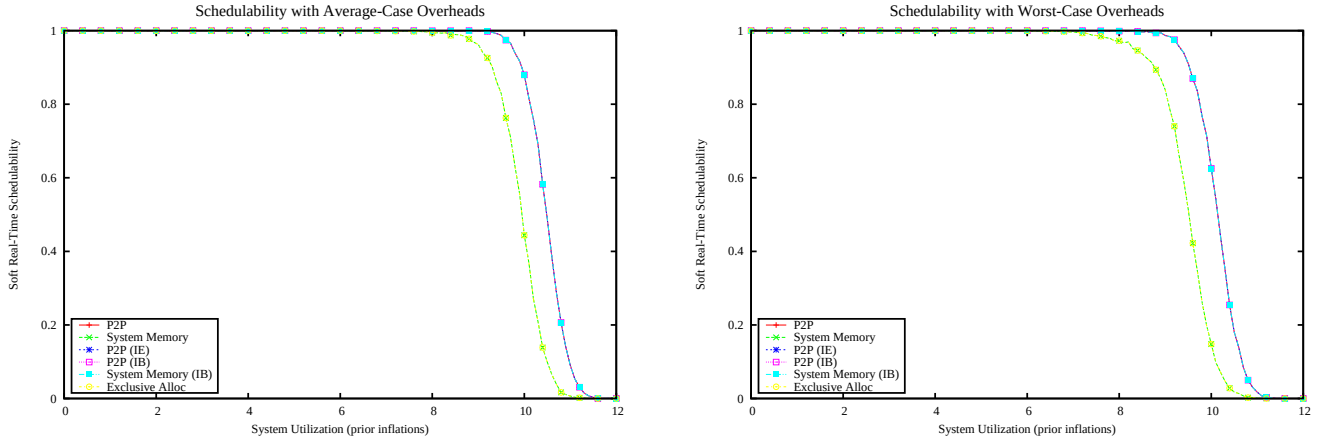

Figure 4714: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

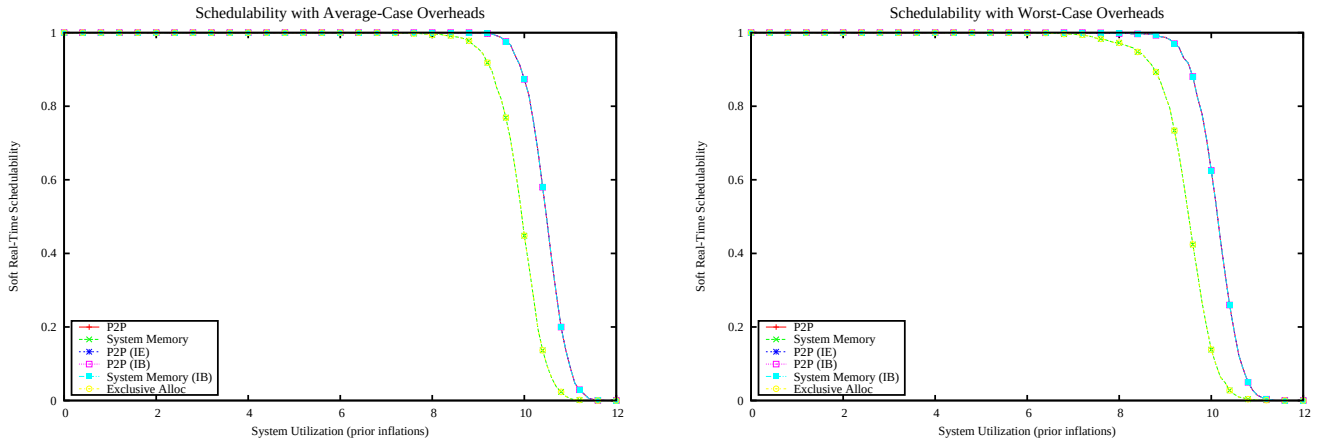

Figure 4715: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

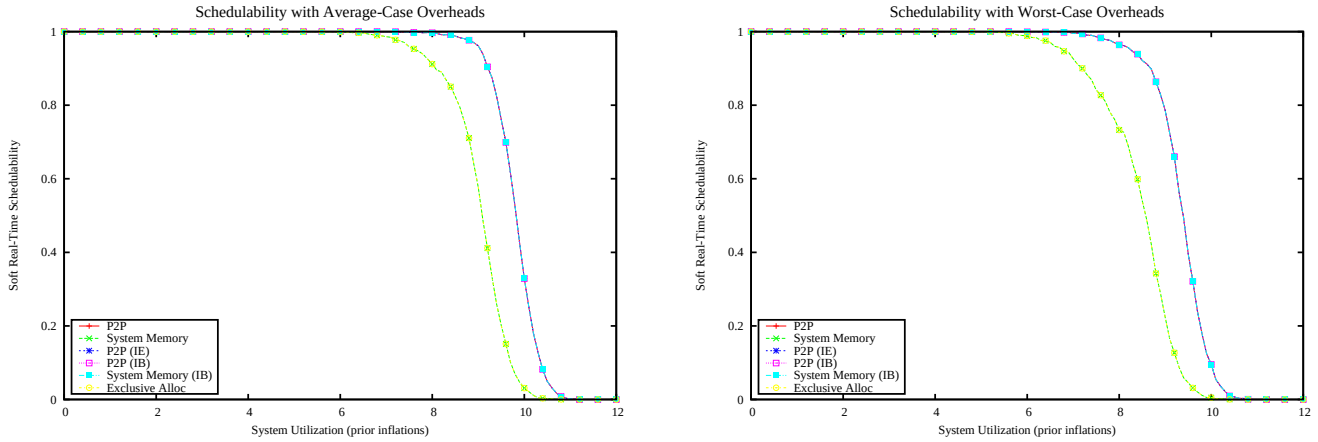

Figure 4716: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

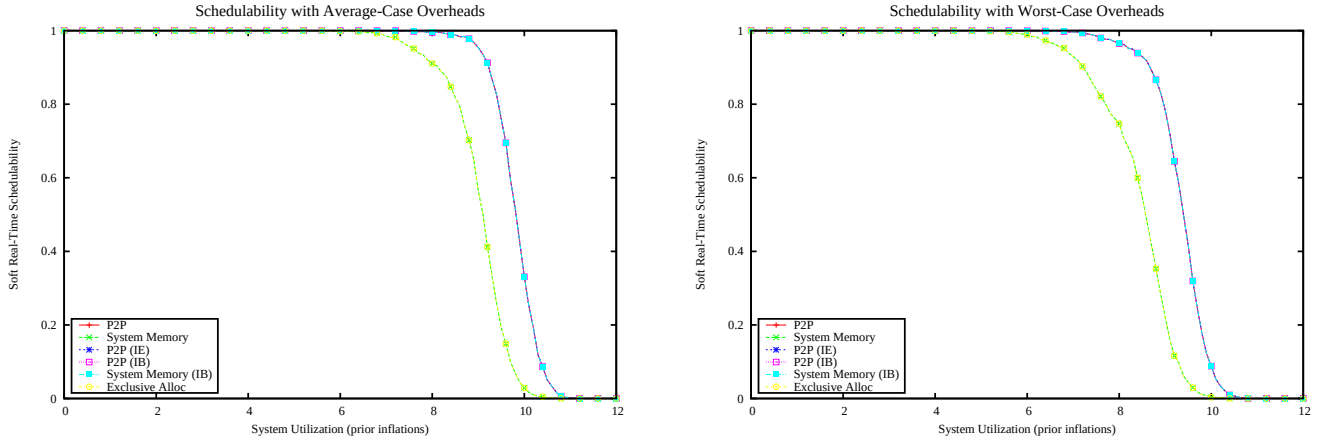

Figure 4717: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

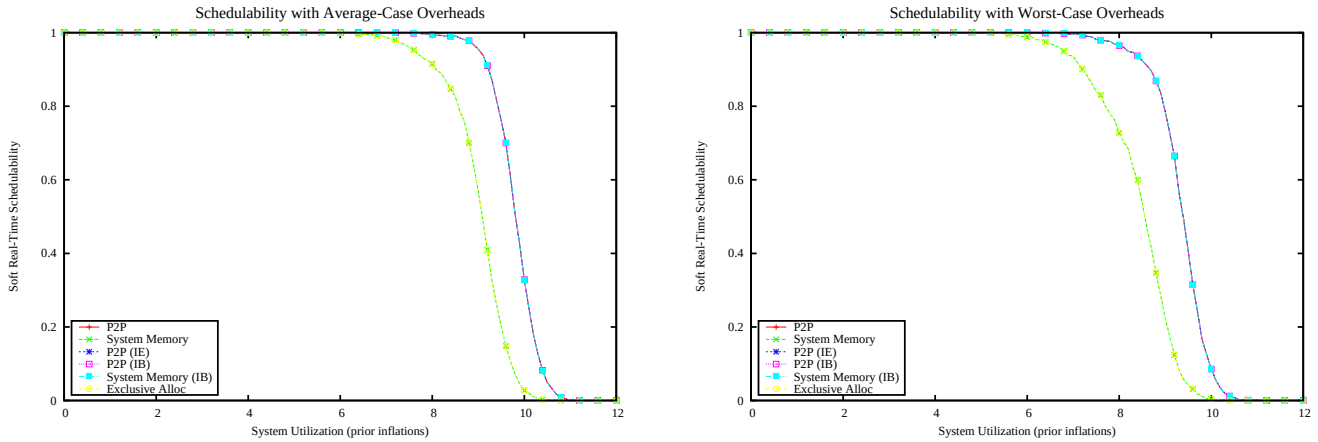

Figure 4718: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

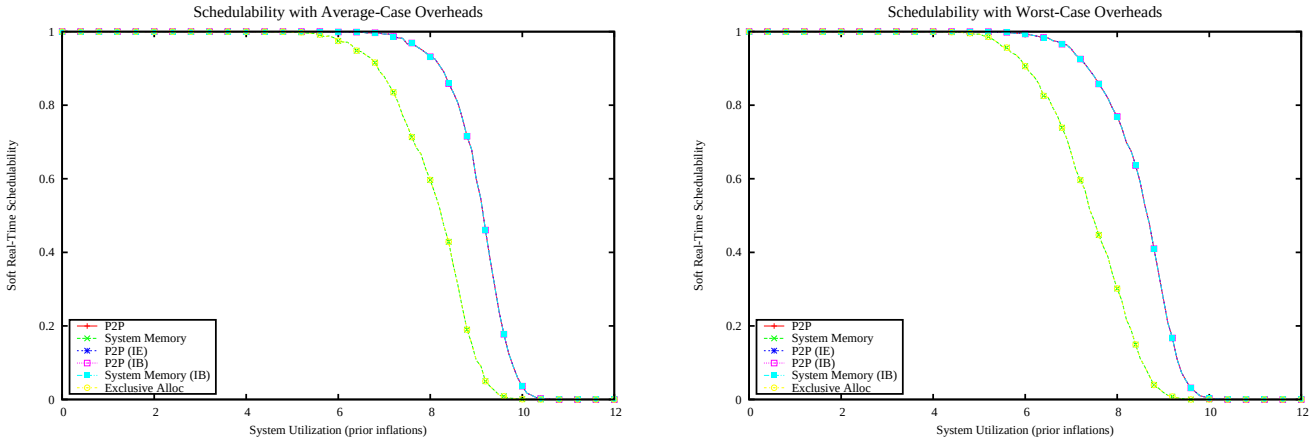

Figure 4719: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

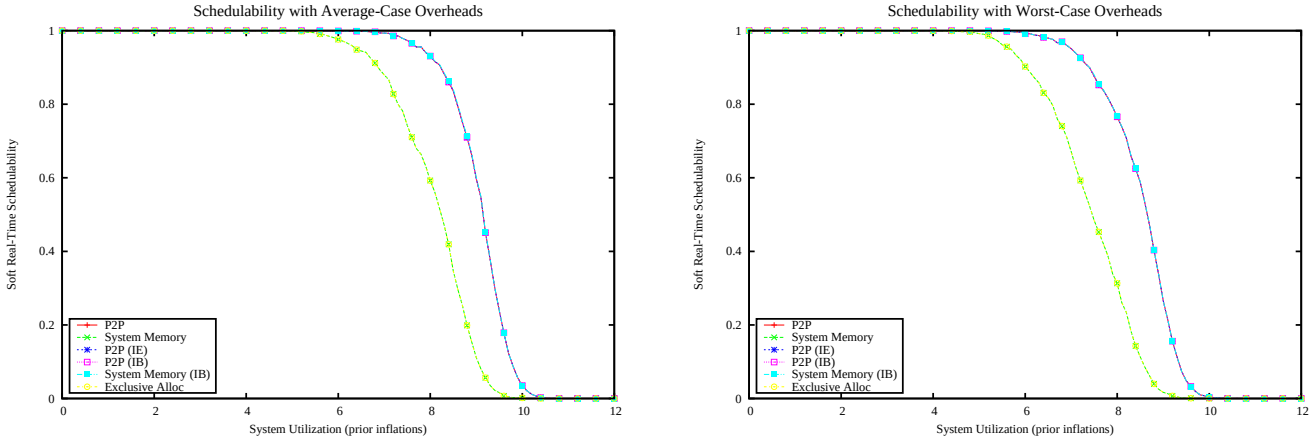

Figure 4720: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

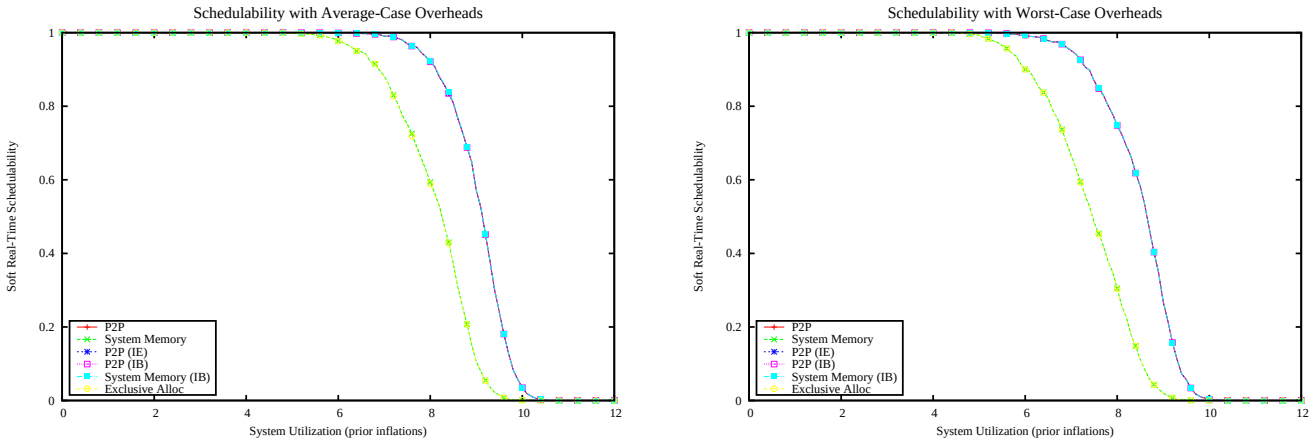

Figure 4721: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

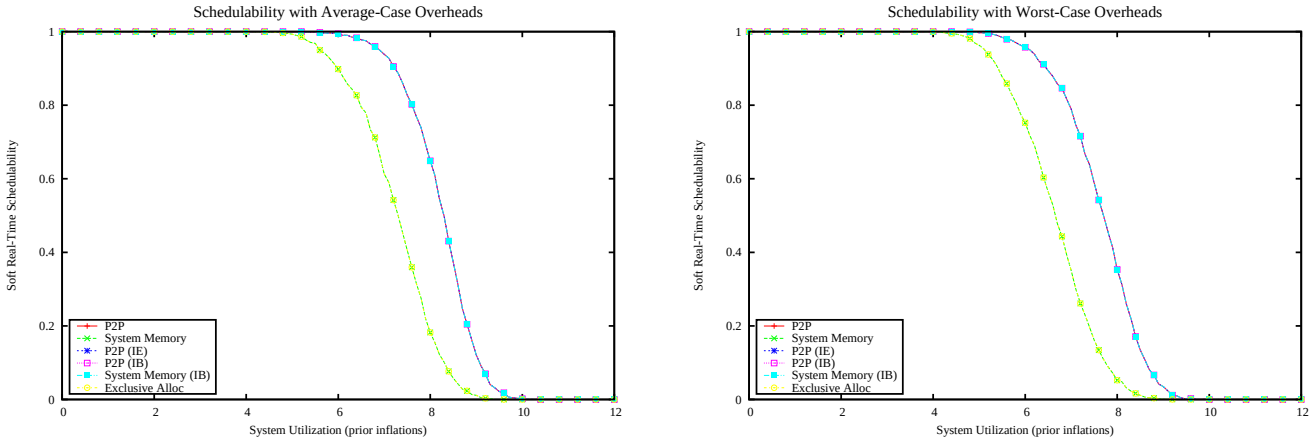

Figure 4722: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

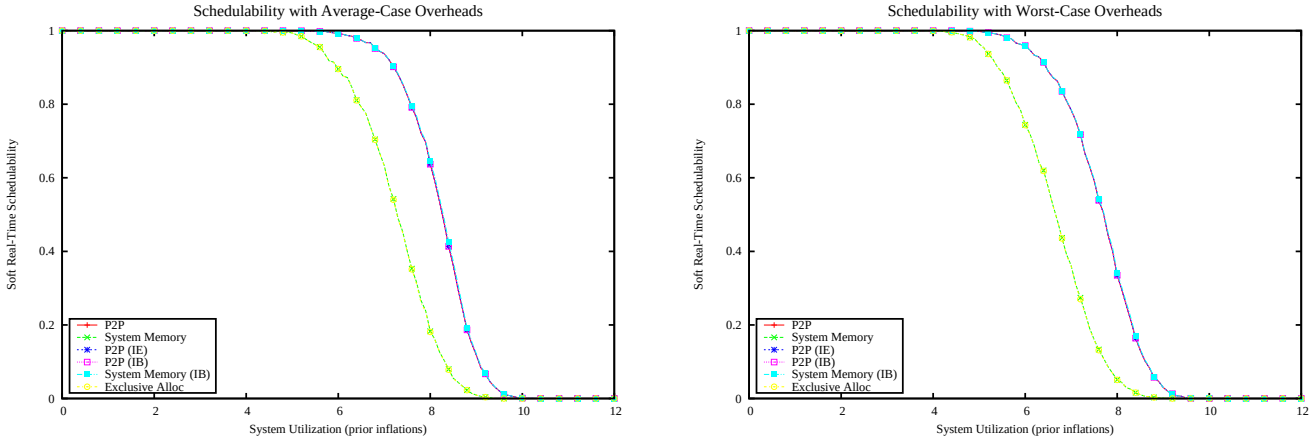

Figure 4723: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

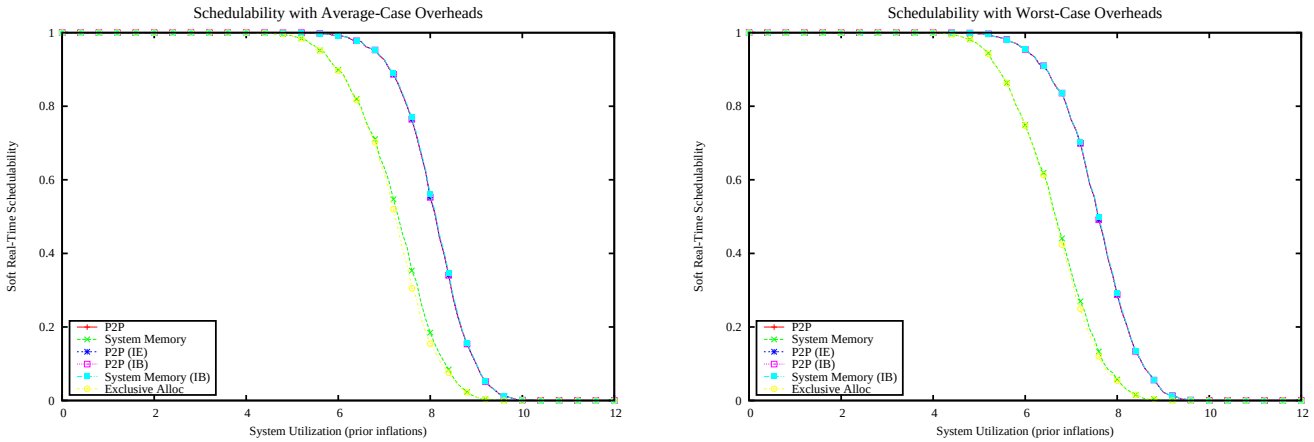

Figure 4724: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

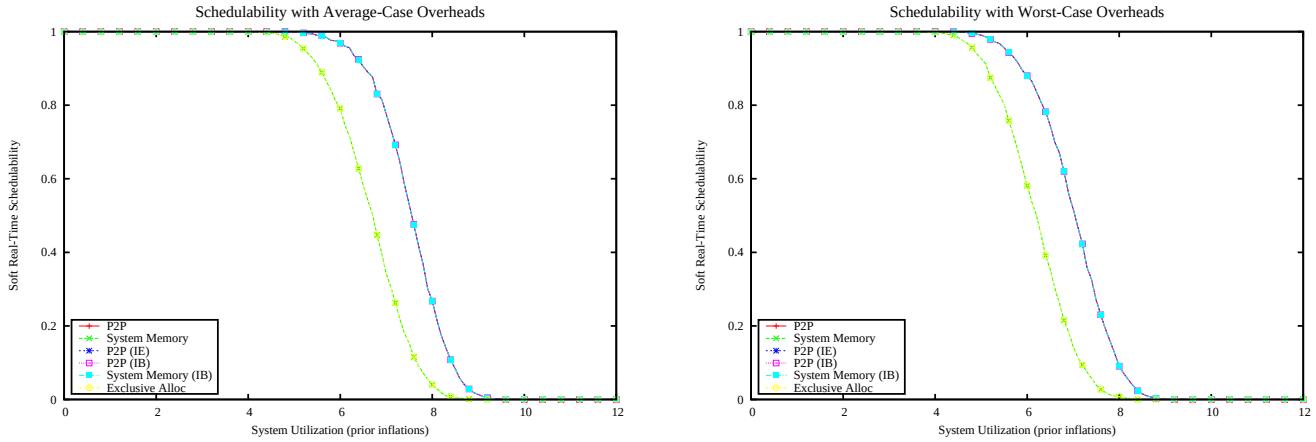

Figure 4725: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

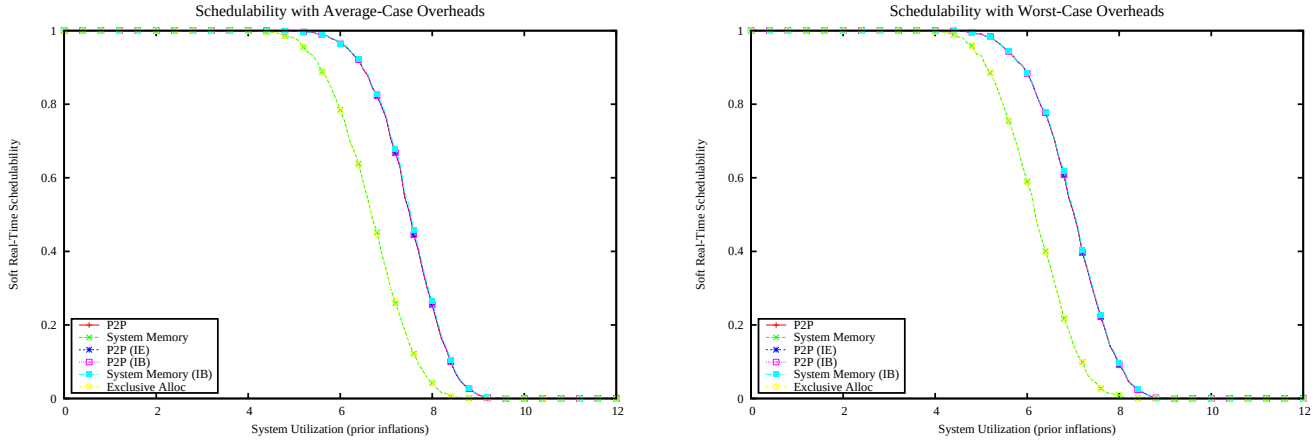

Figure 4726: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

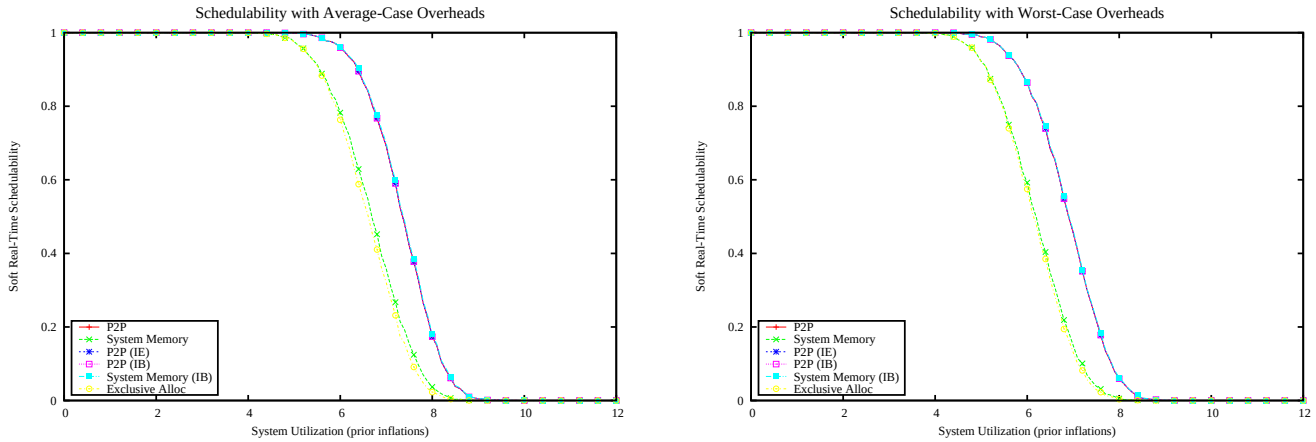

Figure 4727: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

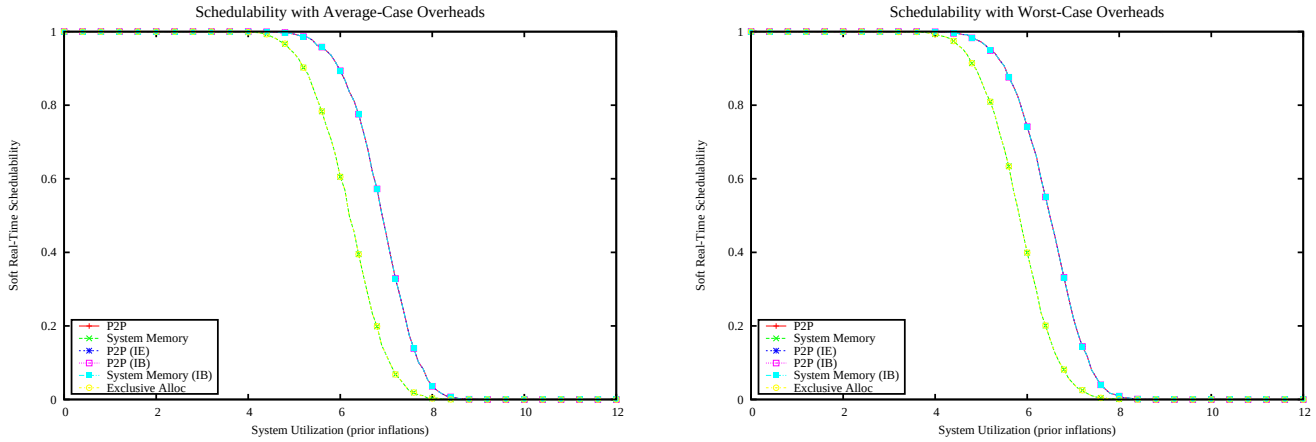

Figure 4728: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

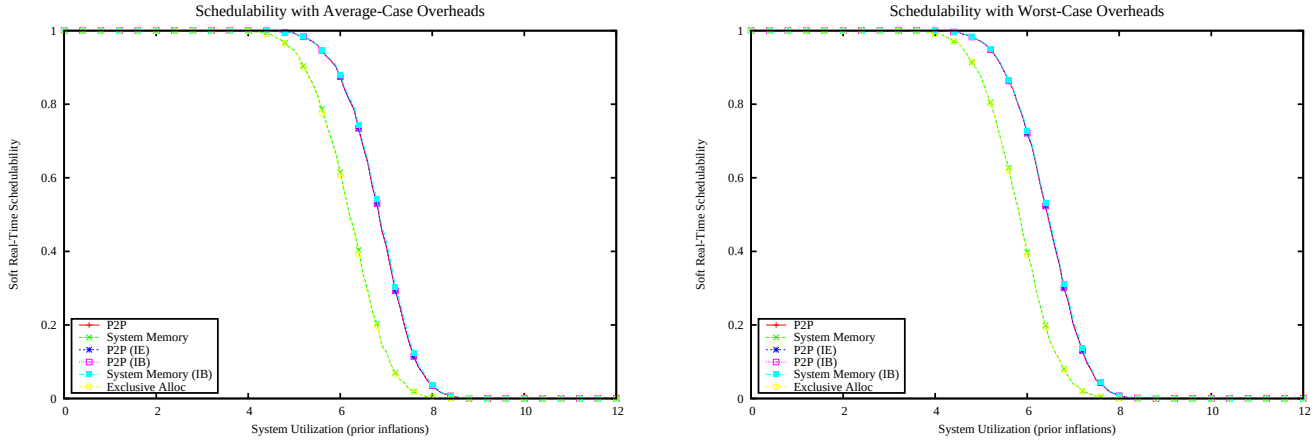

Figure 4729: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

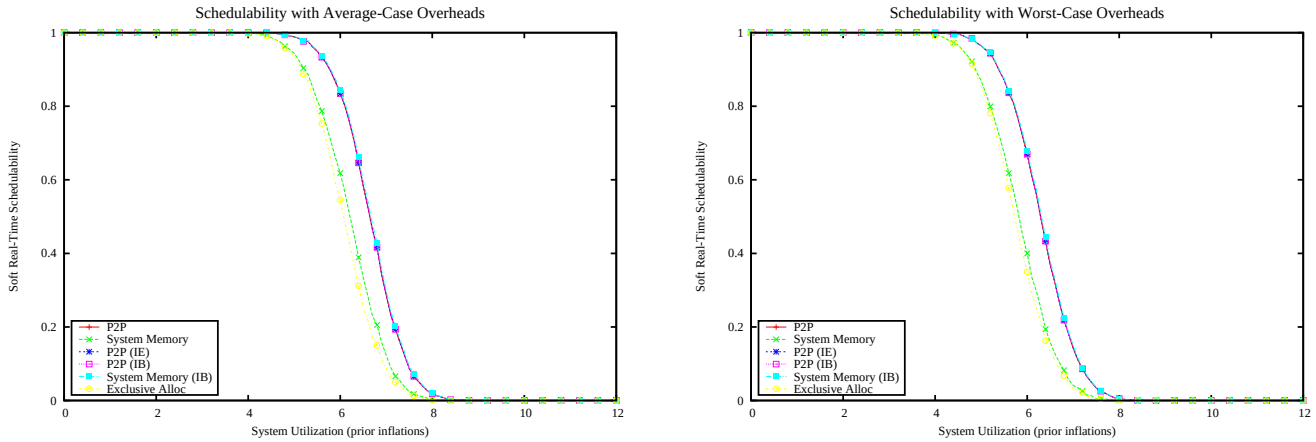

Figure 4730: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

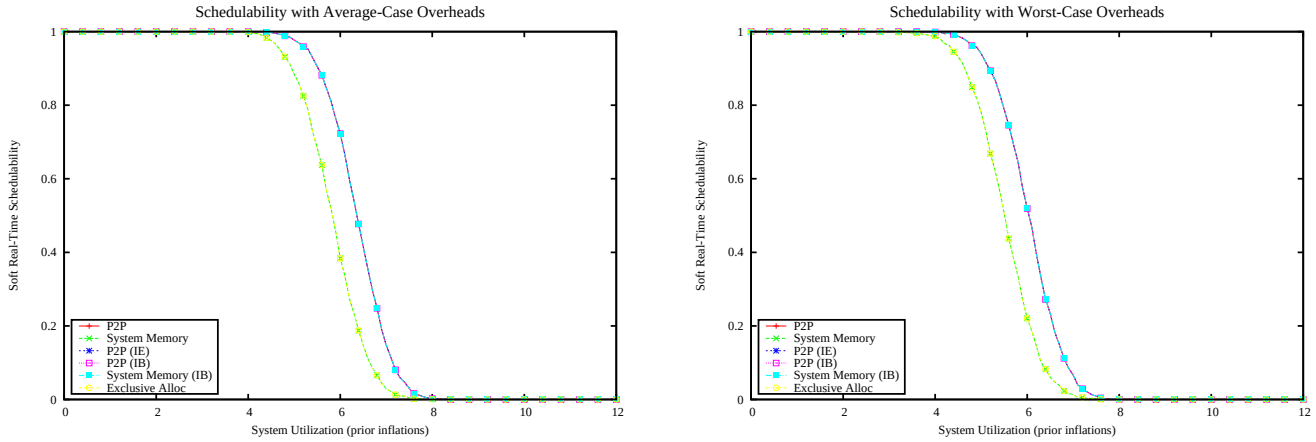

Figure 4731: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

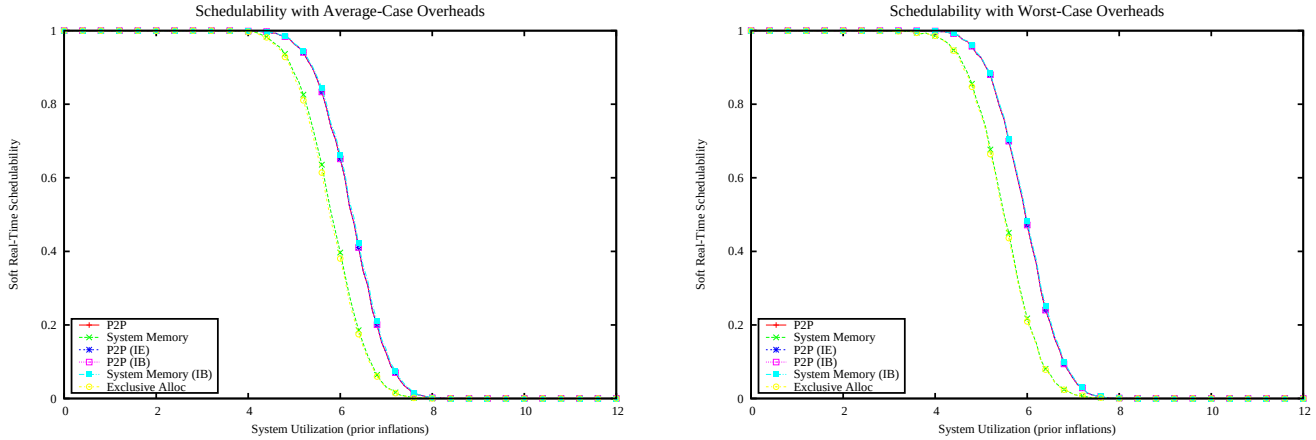

Figure 4732: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

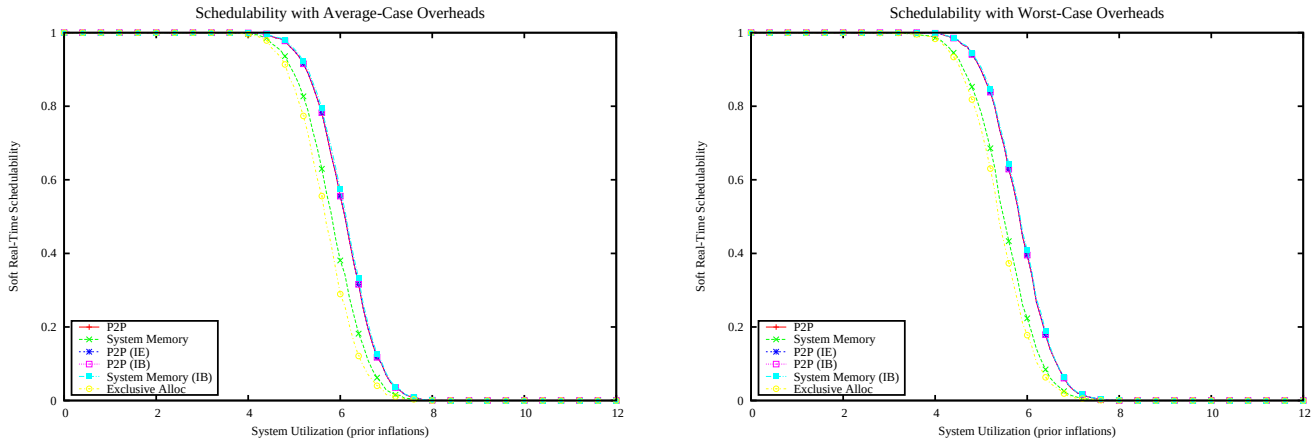

Figure 4733: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

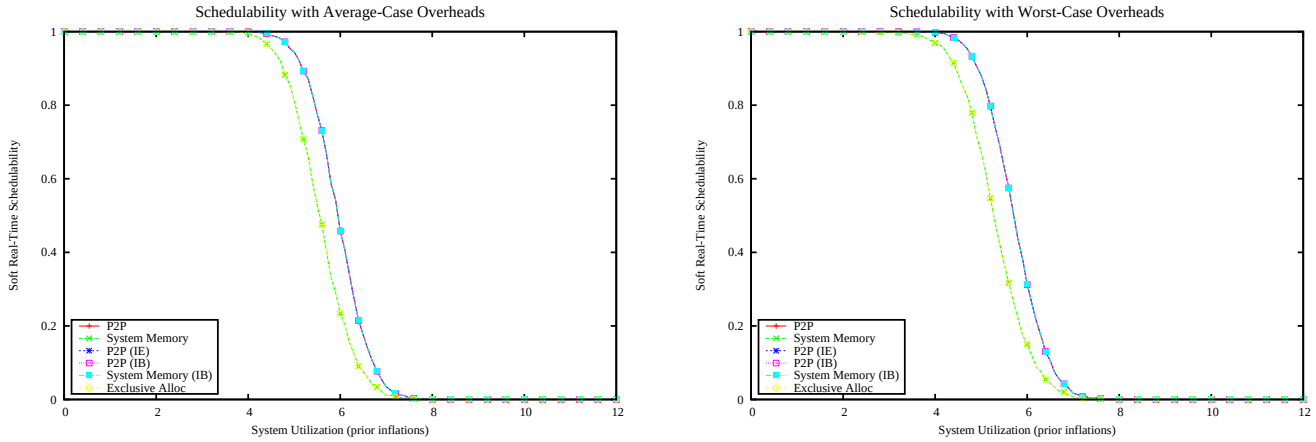

Figure 4734: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

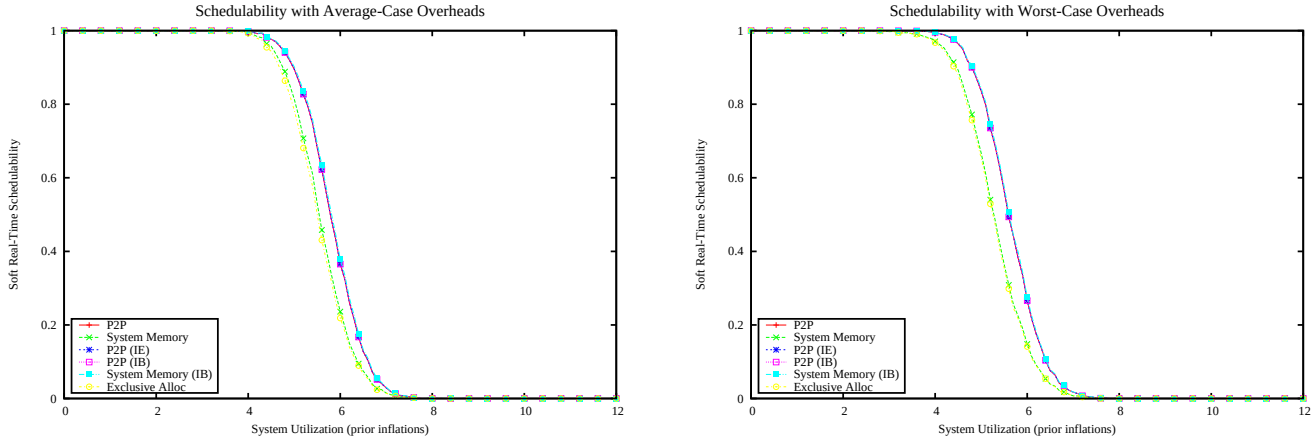

Figure 4735: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

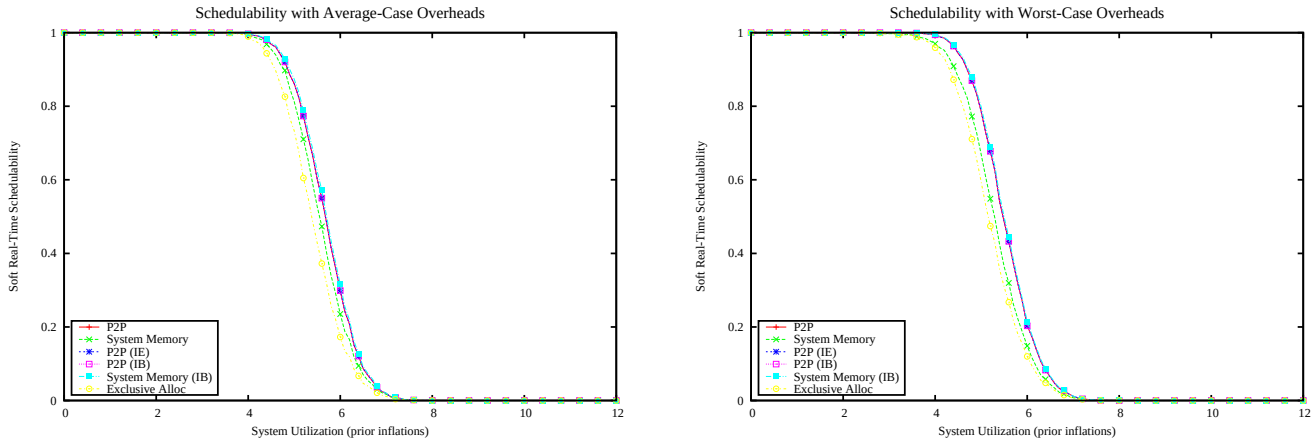

Figure 4736: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

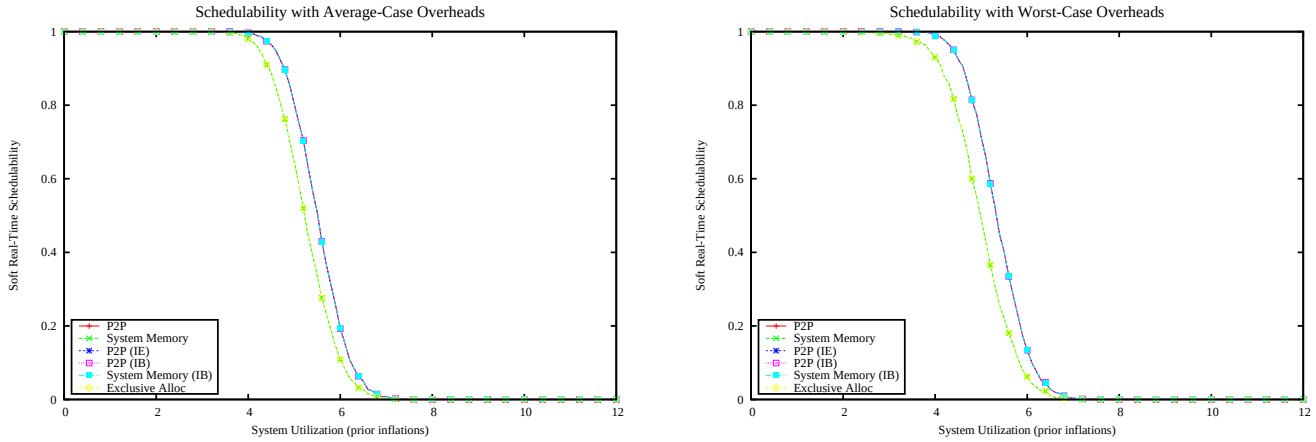

Figure 4737: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

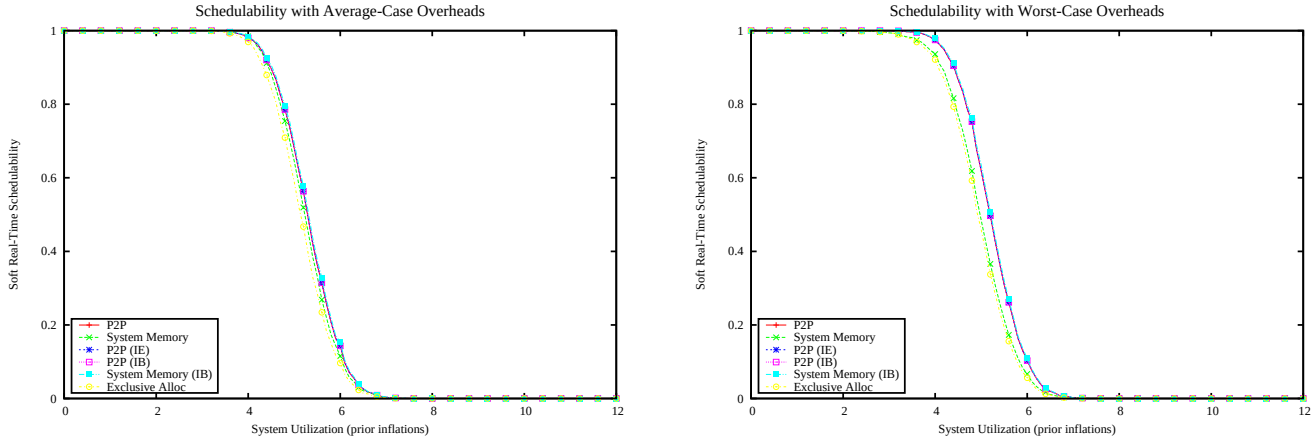

Figure 4738: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

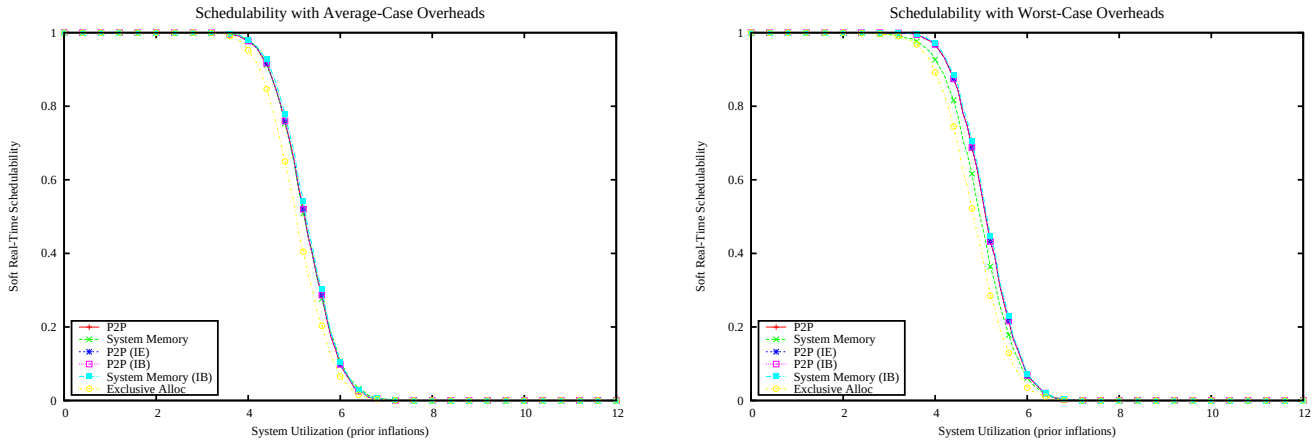

Figure 4739: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

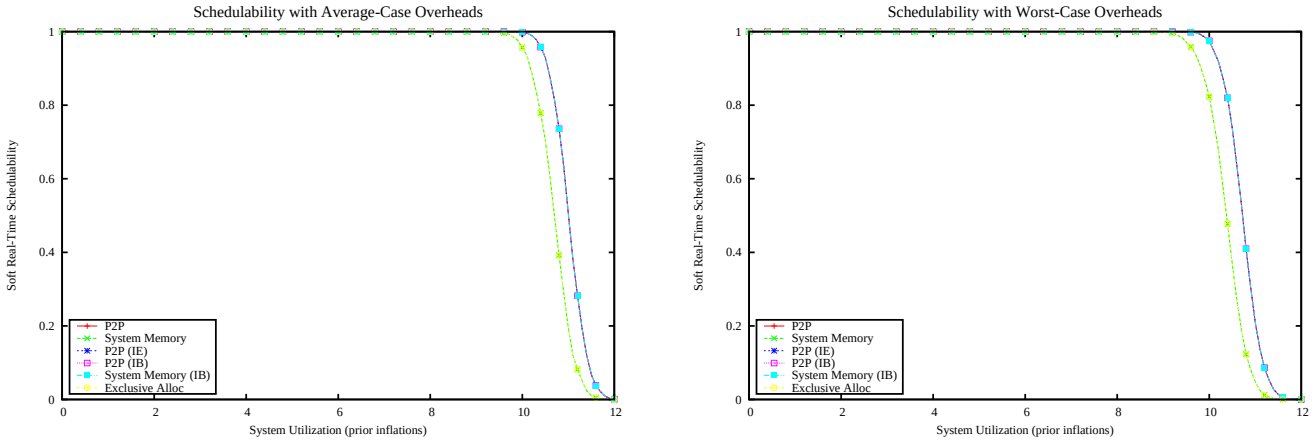

Figure 4740: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

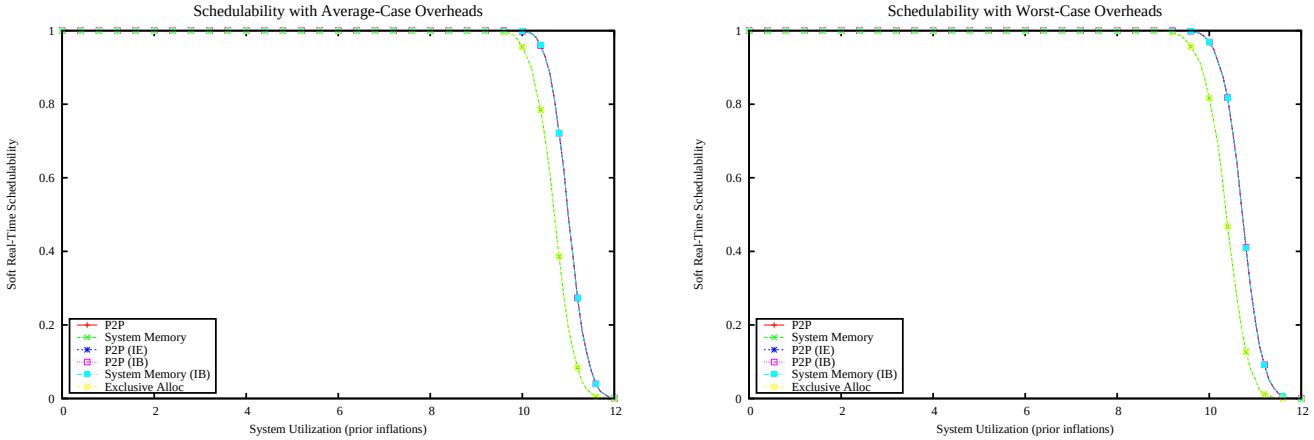

Figure 4741: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

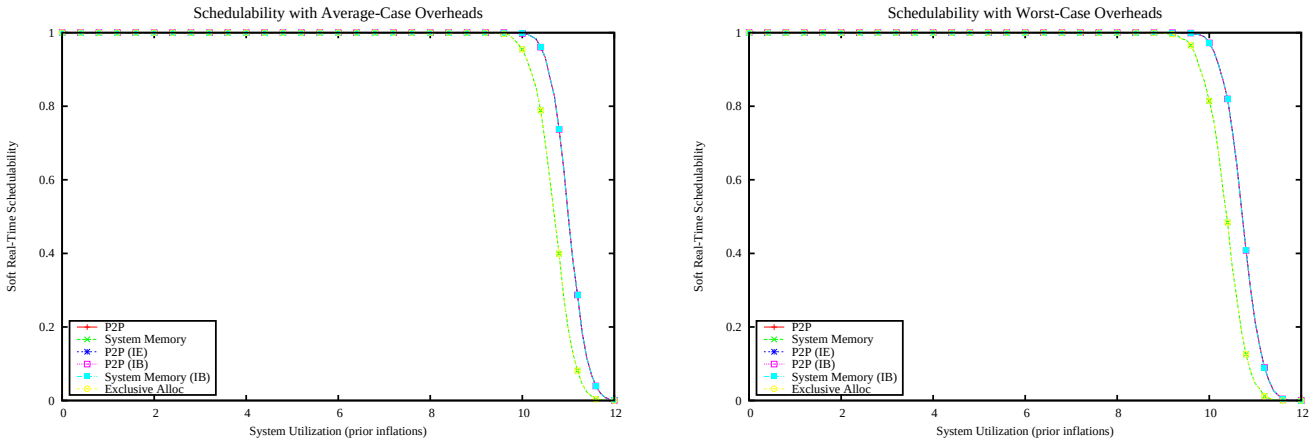

Figure 4742: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

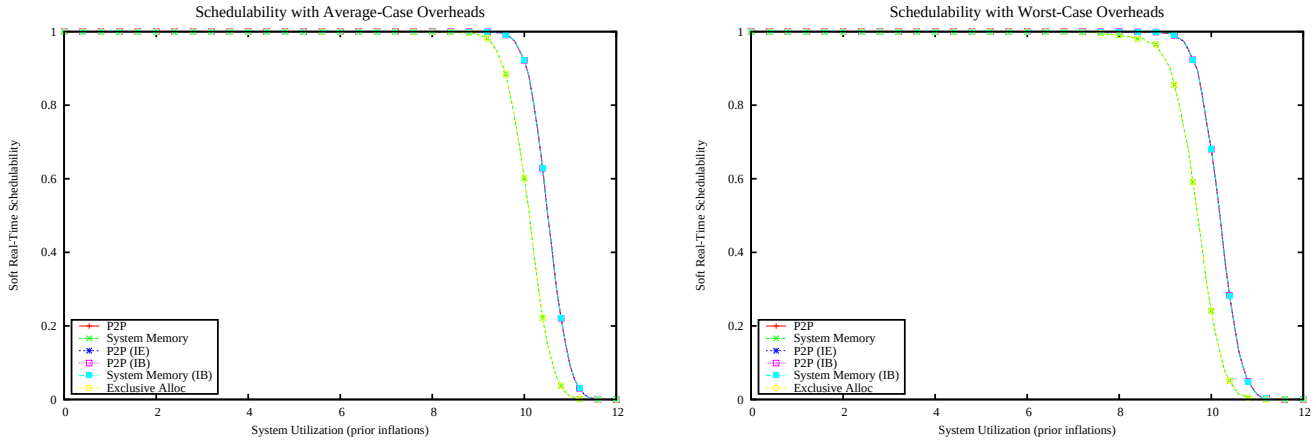

Figure 4743: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

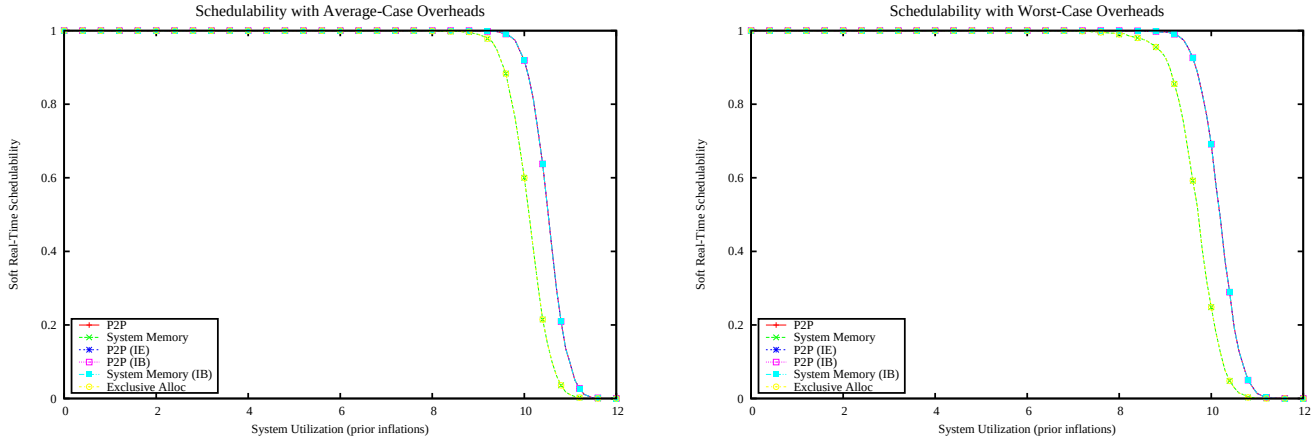

Figure 4744: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

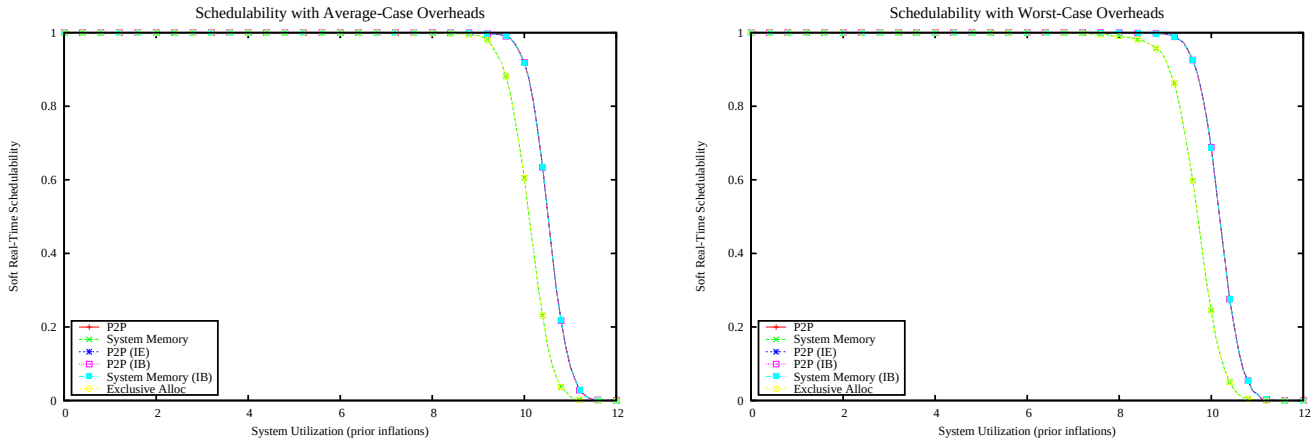

Figure 4745: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

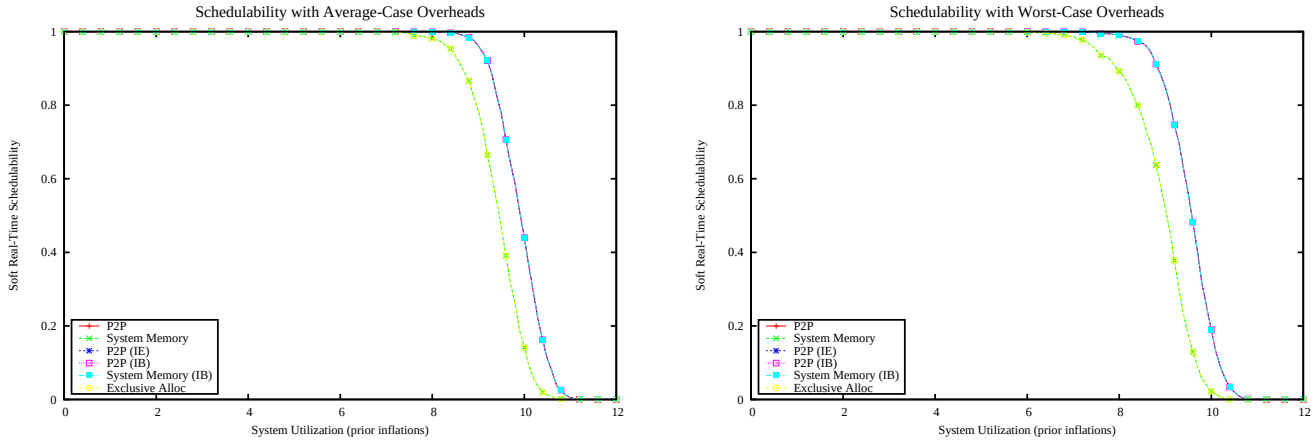

Figure 4746: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

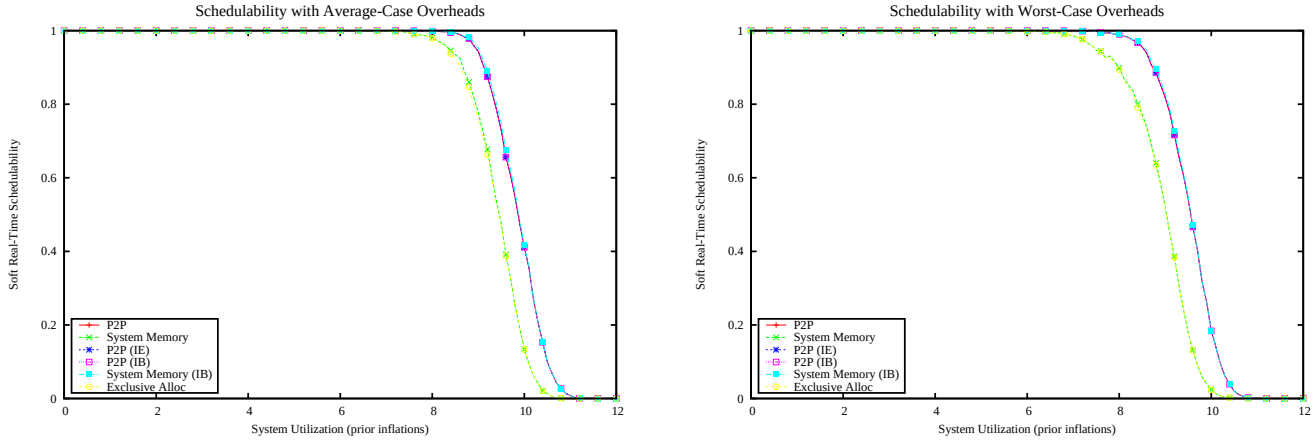

Figure 4747: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

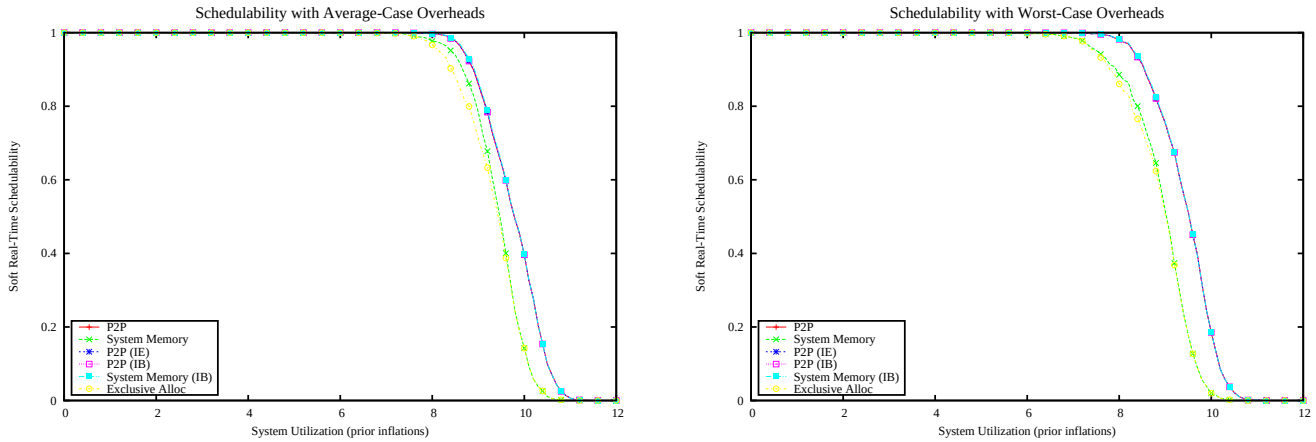

Figure 4748: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

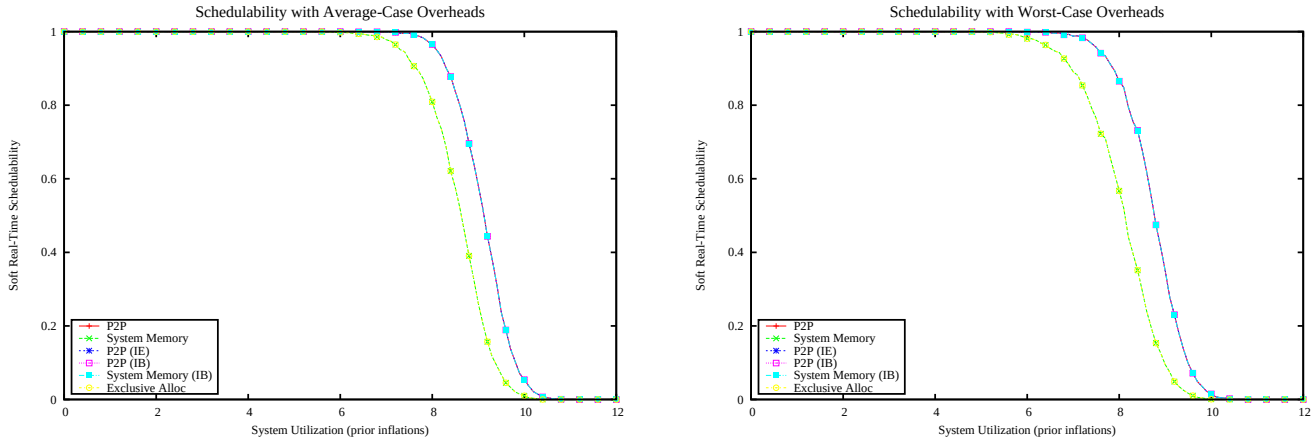

Figure 4749: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

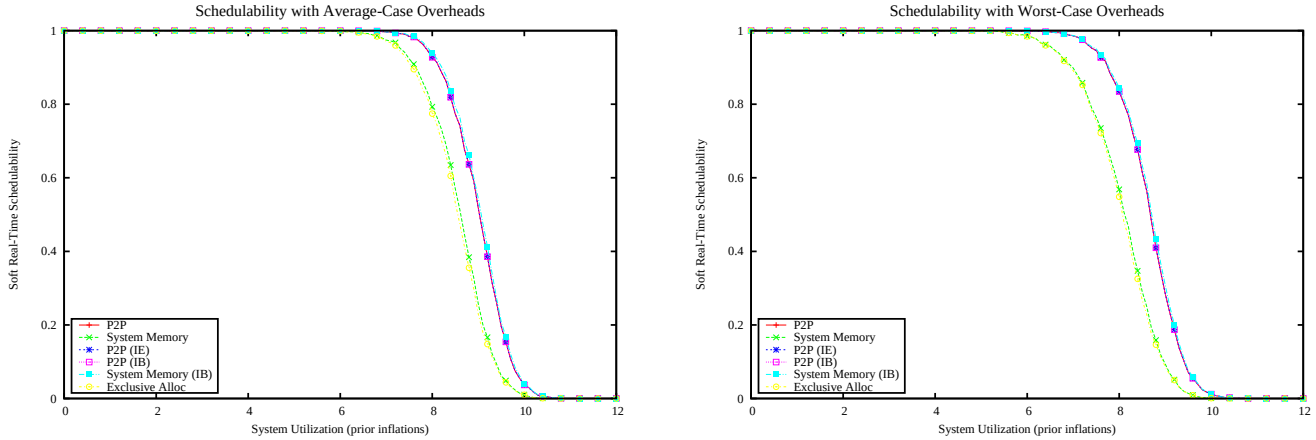

Figure 4750: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

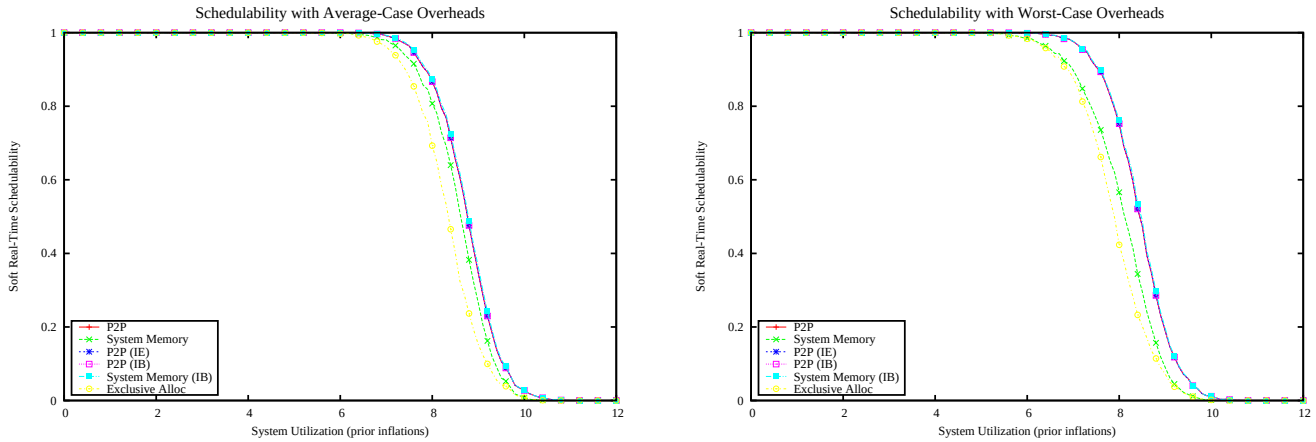

Figure 4751: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

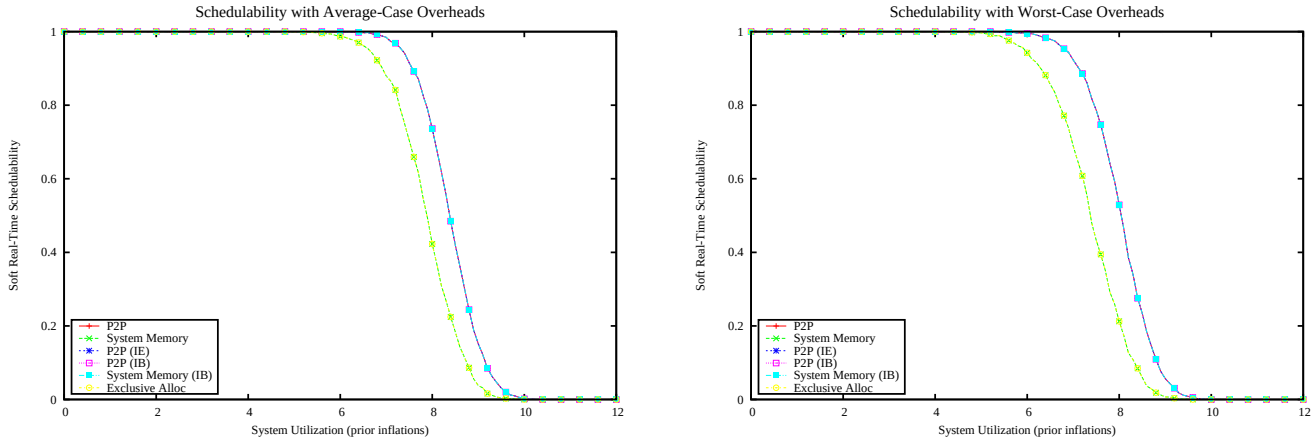

Figure 4752: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

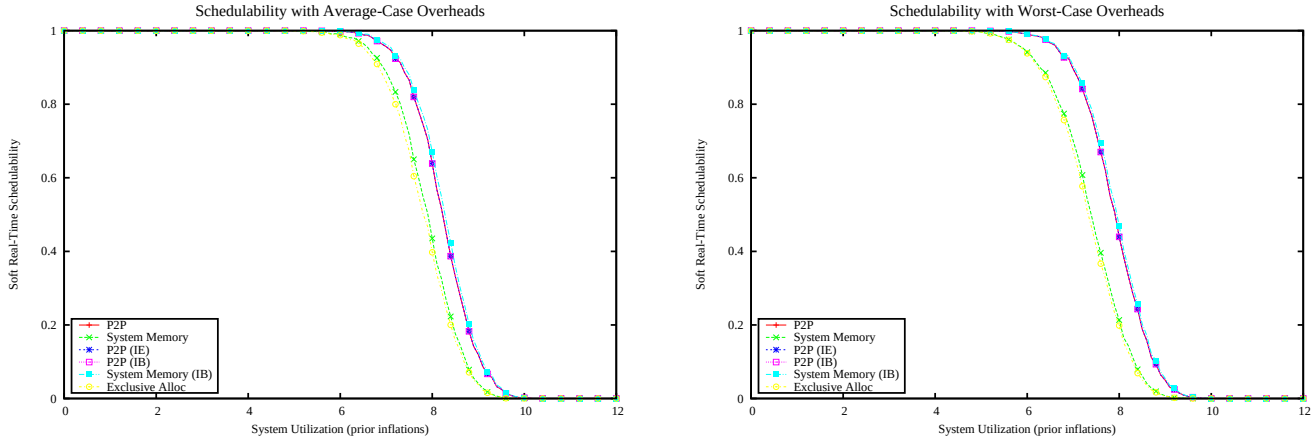

Figure 4753: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

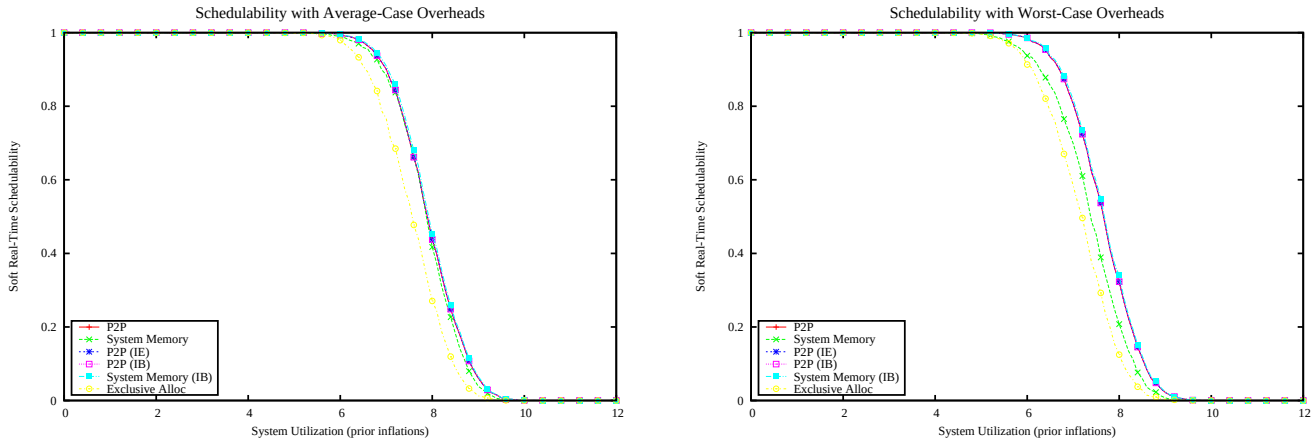

Figure 4754: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

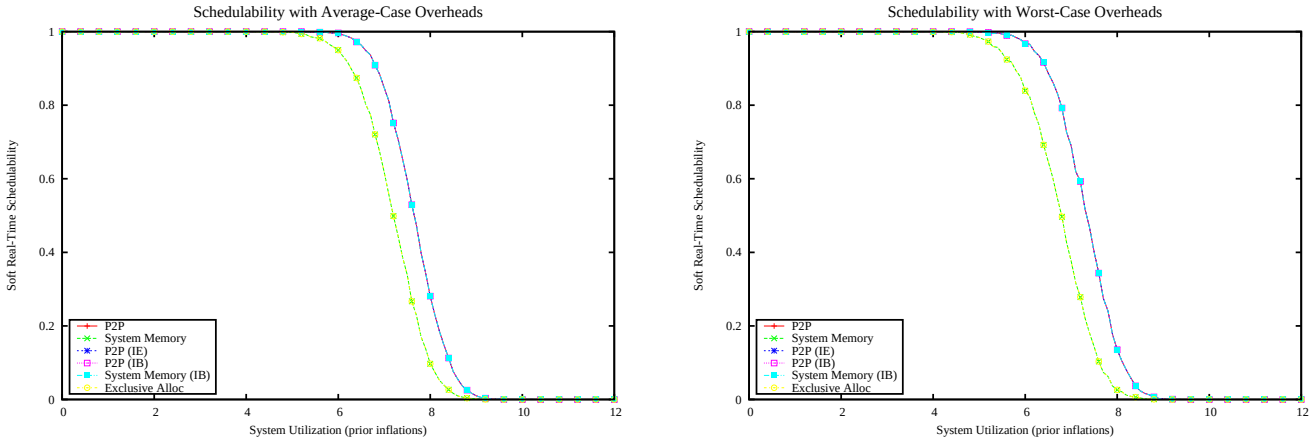

Figure 4755: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

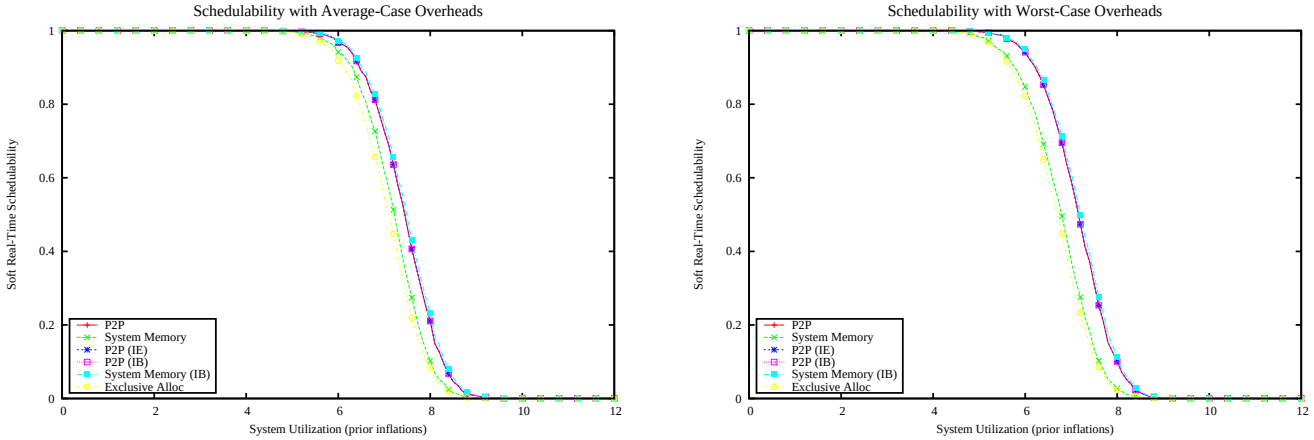

Figure 4756: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

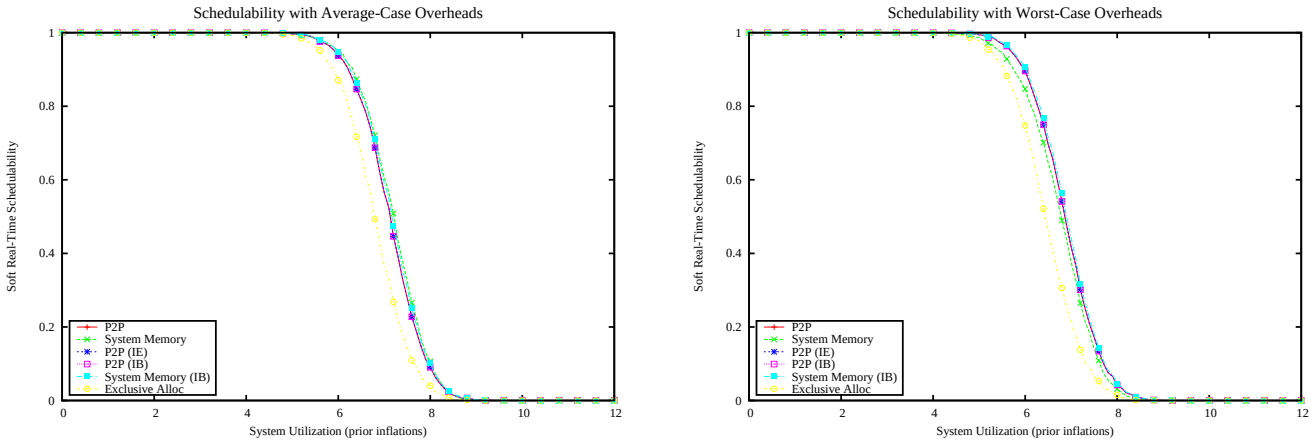

Figure 4757: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

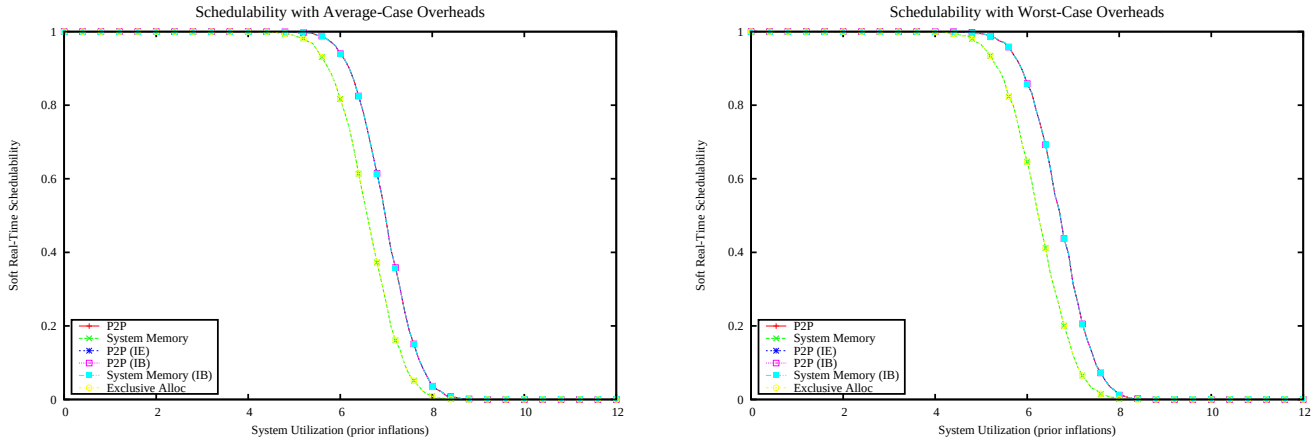

Figure 4758: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

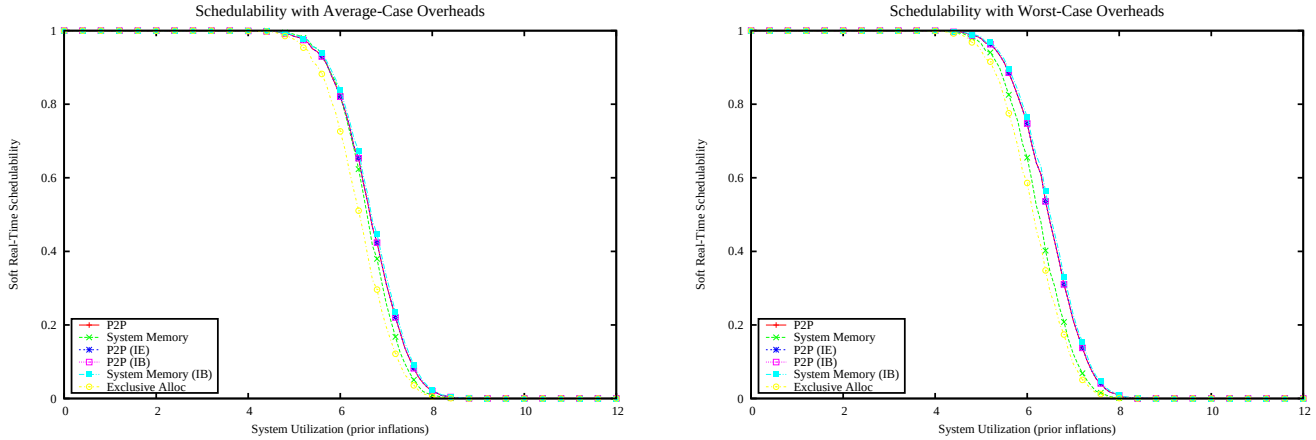

Figure 4759: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

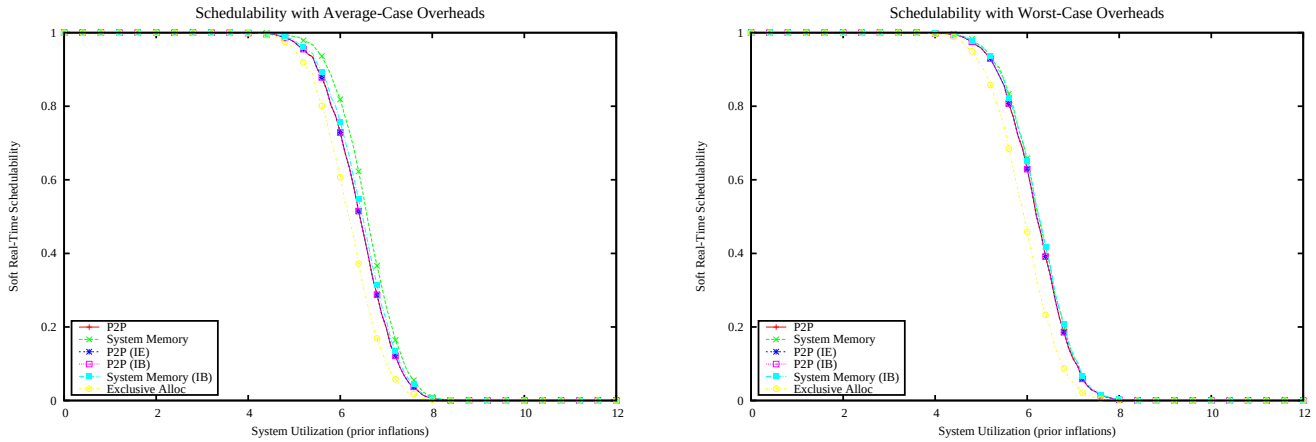

Figure 4760: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

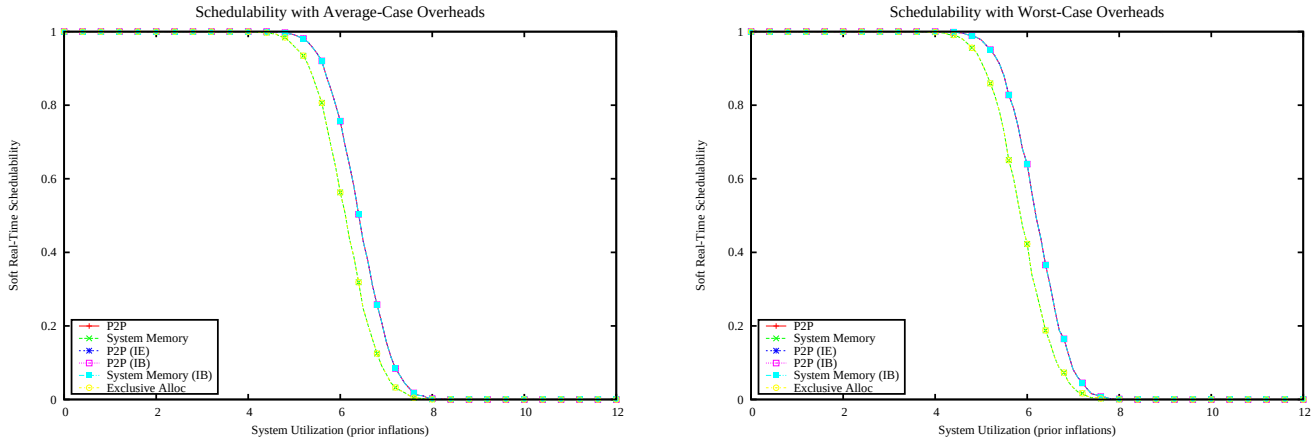

Figure 4761: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

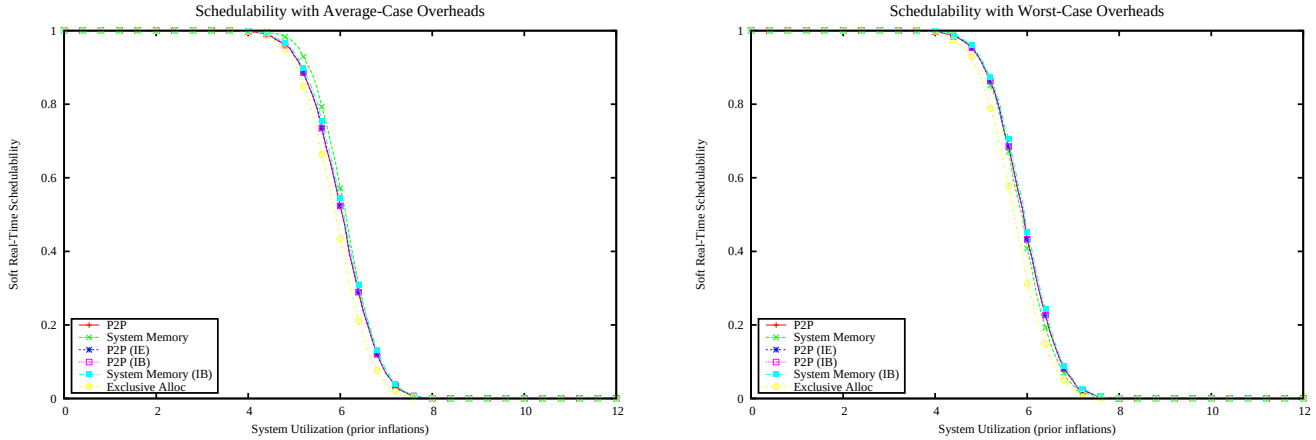

Figure 4762: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

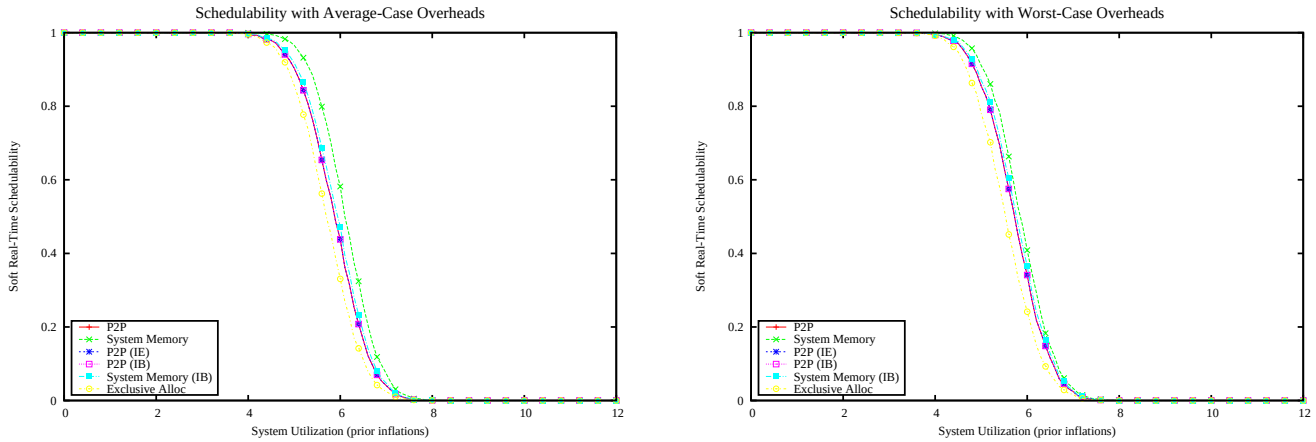

Figure 4763: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

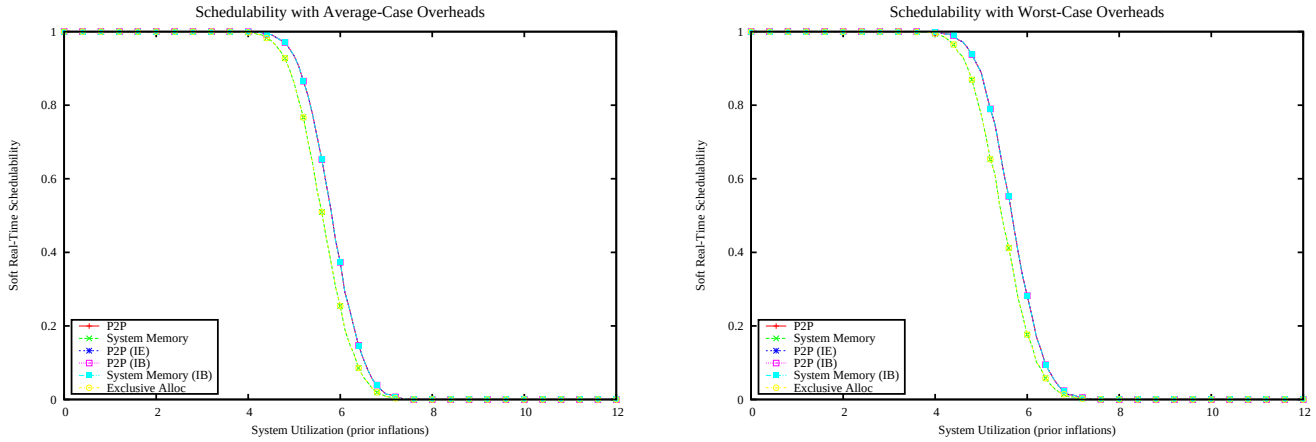

Figure 4764: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

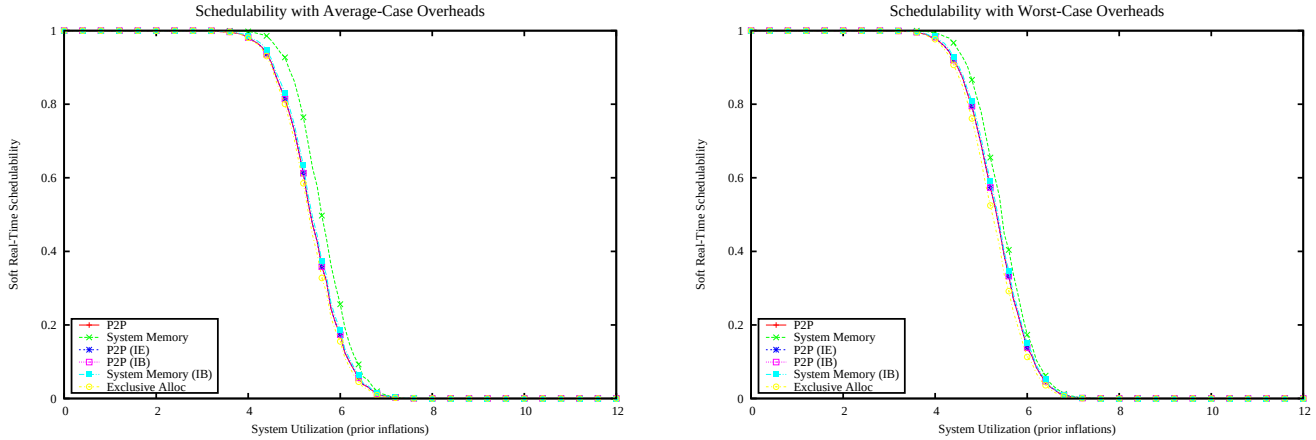

Figure 4765: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

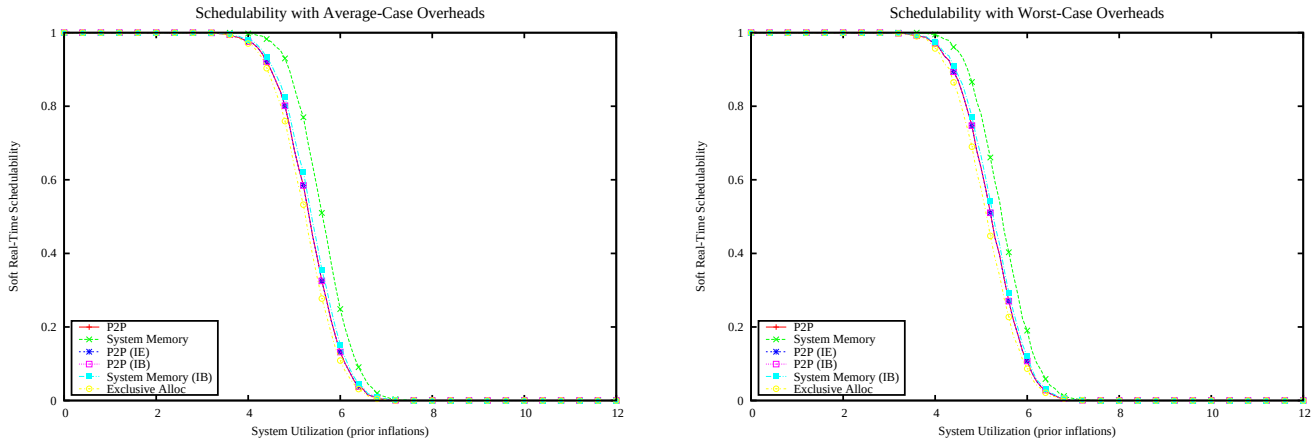

Figure 4766: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

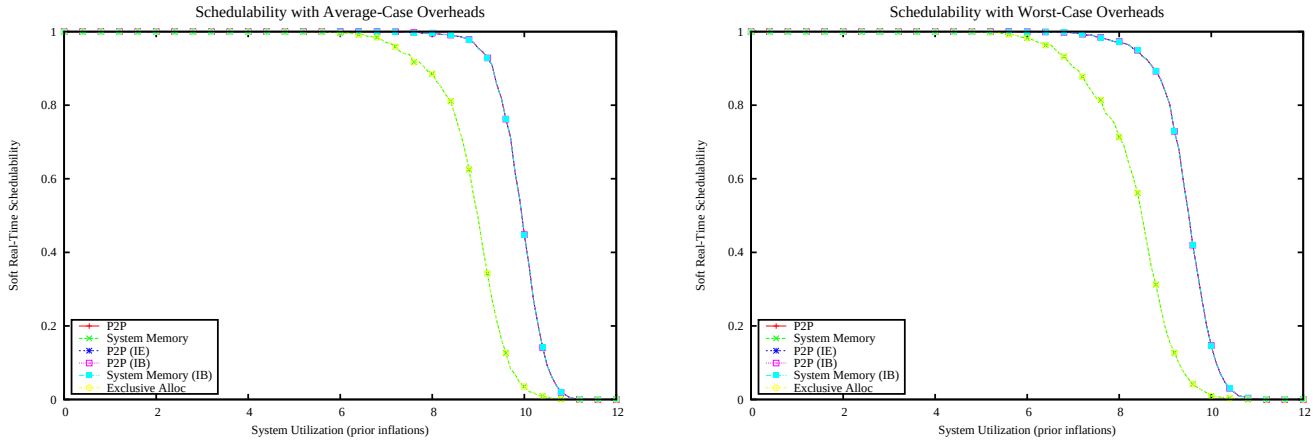

Figure 4767: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

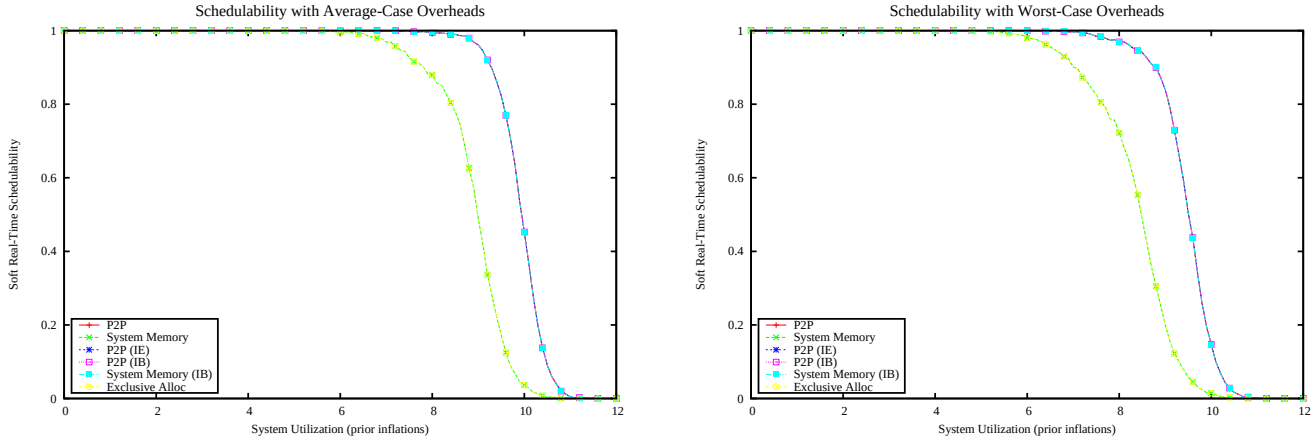

Figure 4768: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

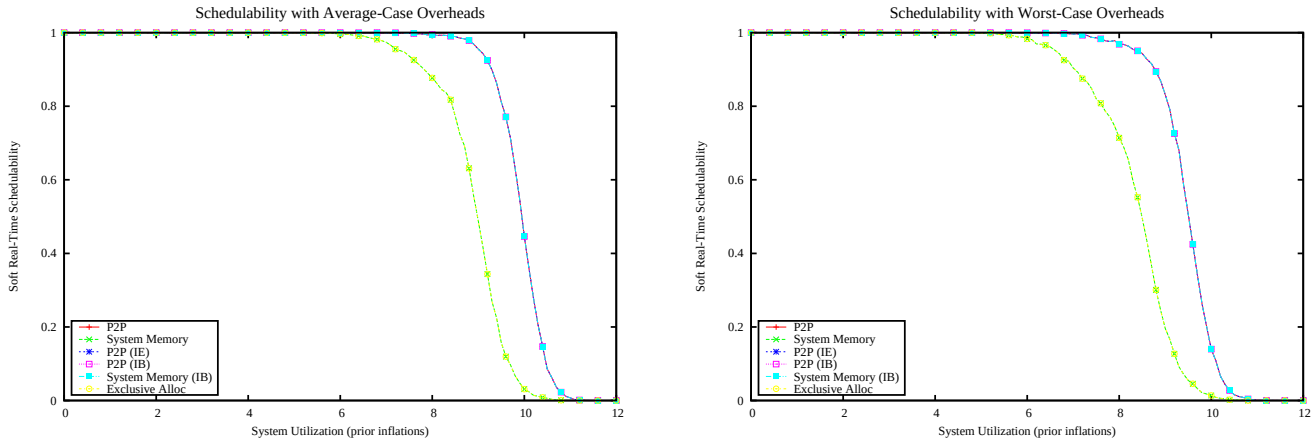

Figure 4769: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

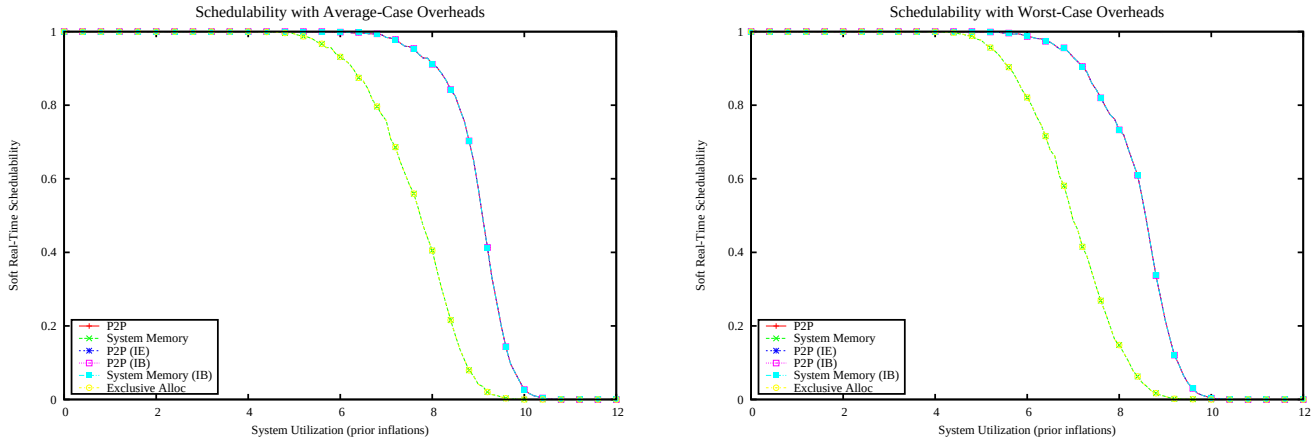

Figure 4770: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

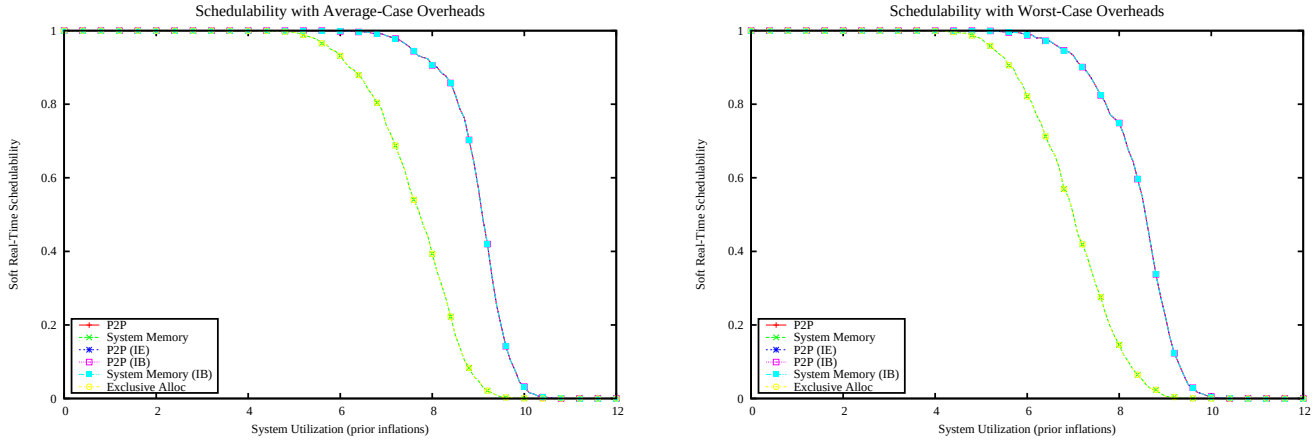

Figure 4771: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

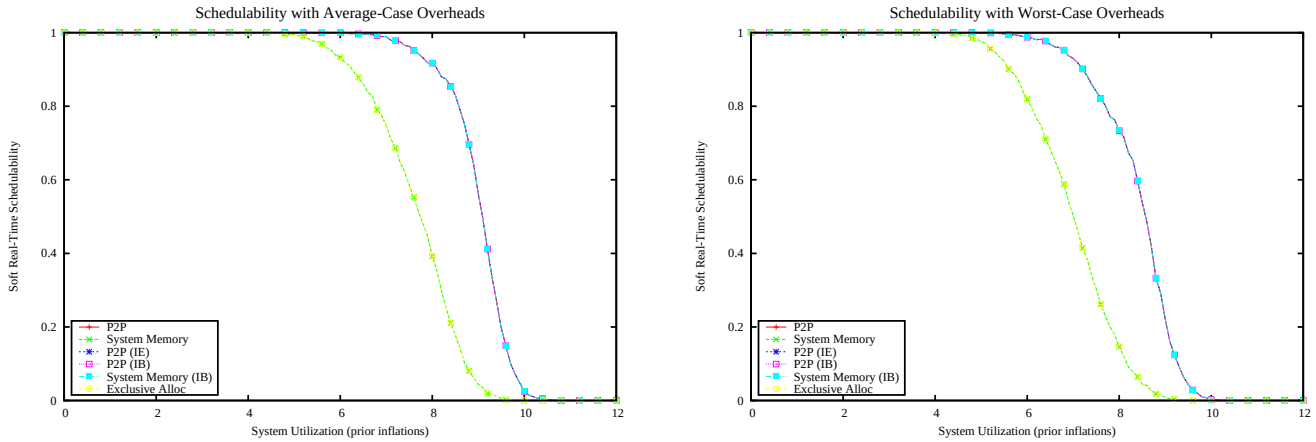

Figure 4772: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

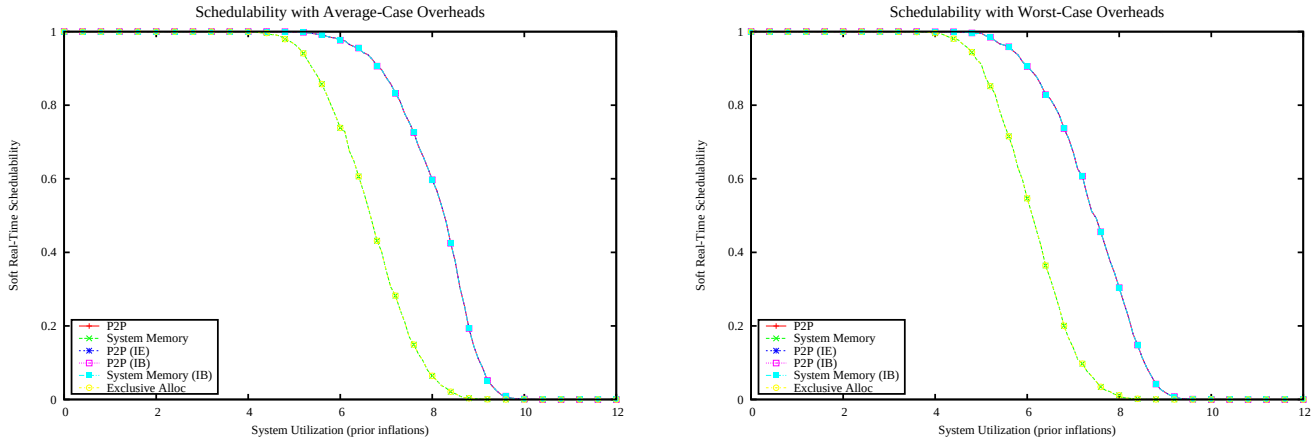

Figure 4773: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

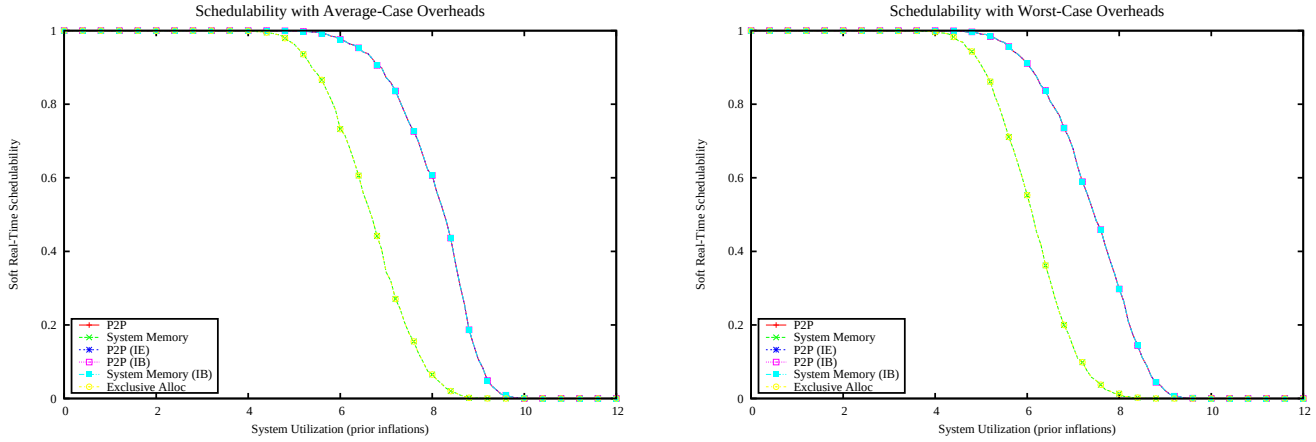

Figure 4774: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

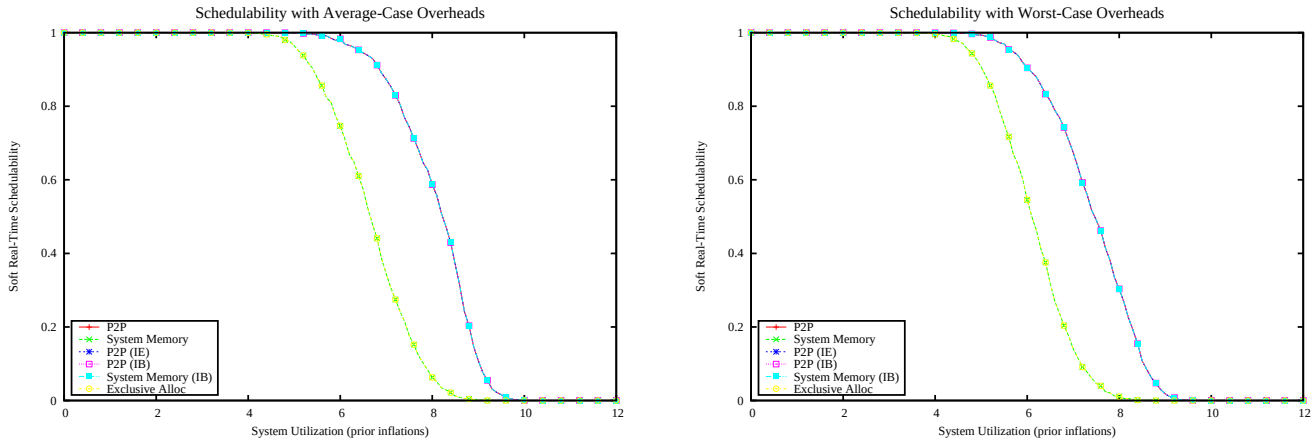

Figure 4775: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

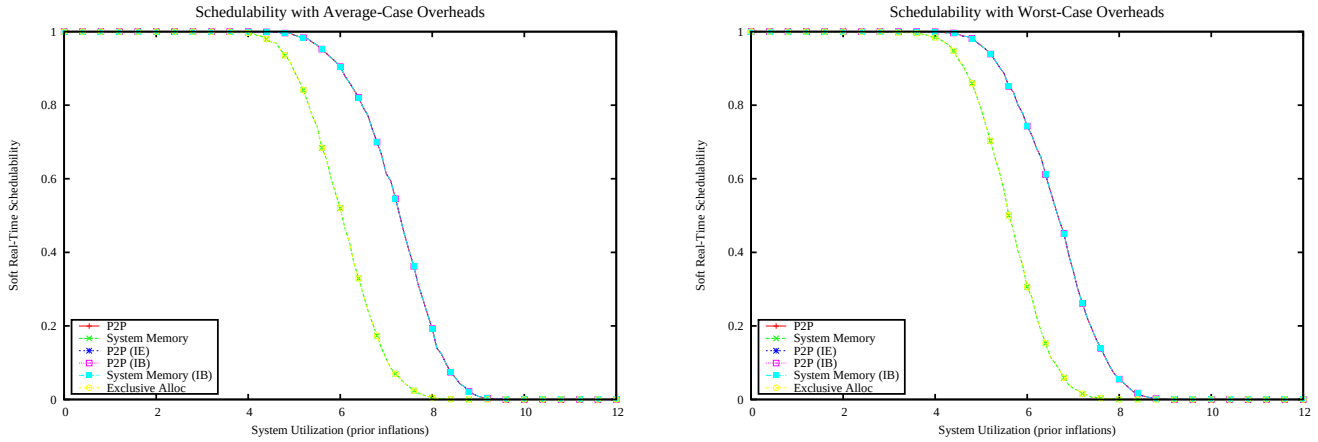

Figure 4776: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

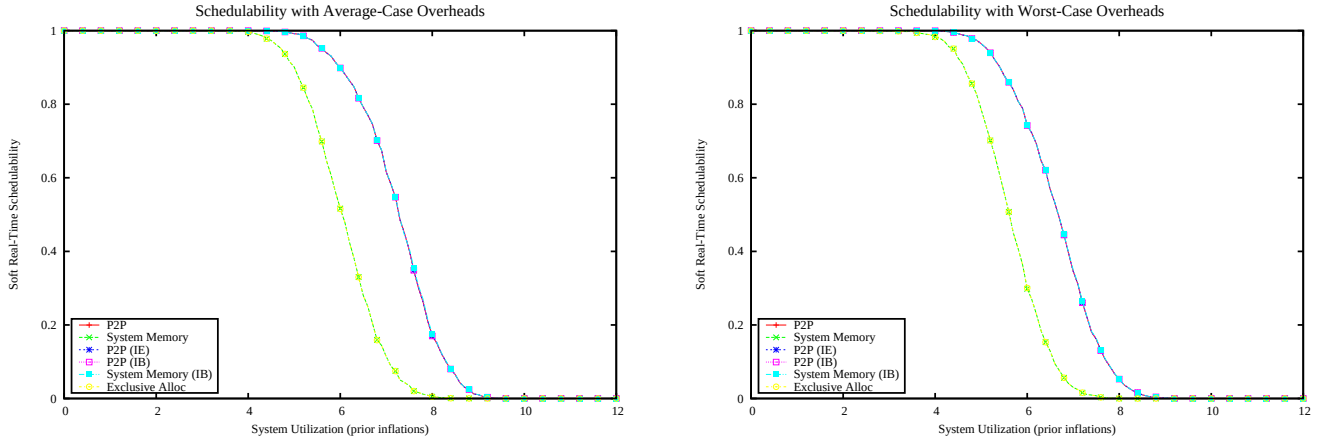

Figure 4777: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

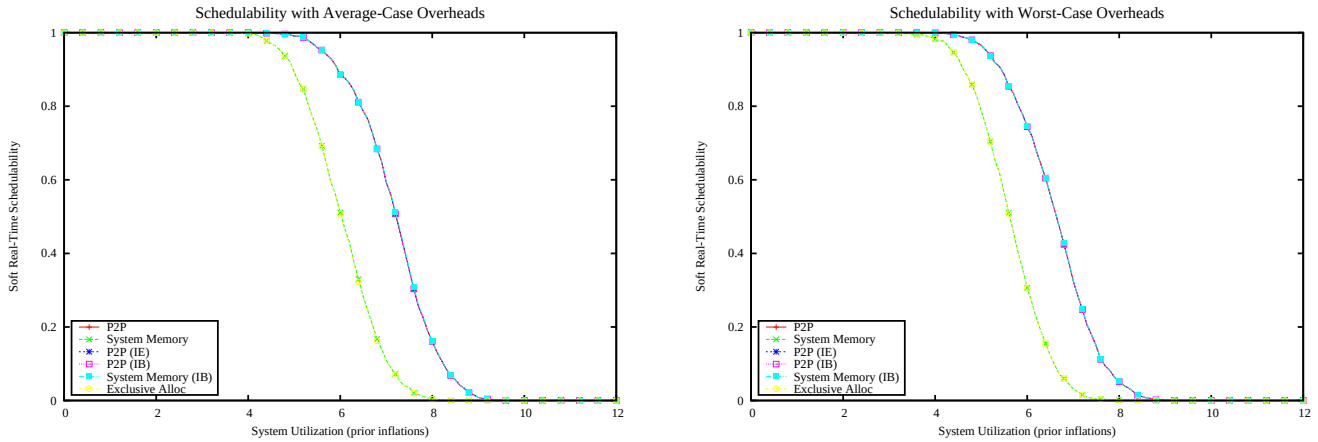

Figure 4778: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

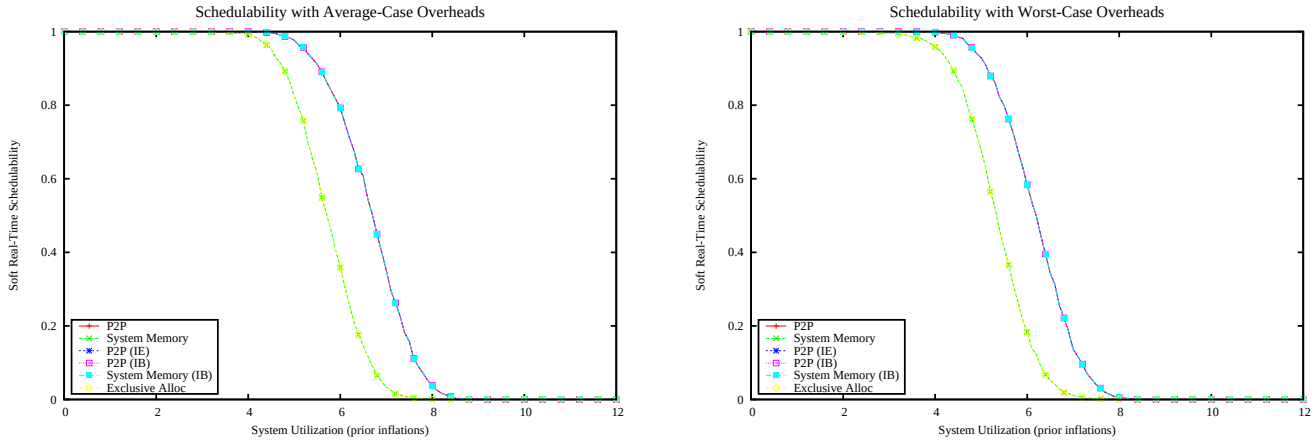

Figure 4779: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

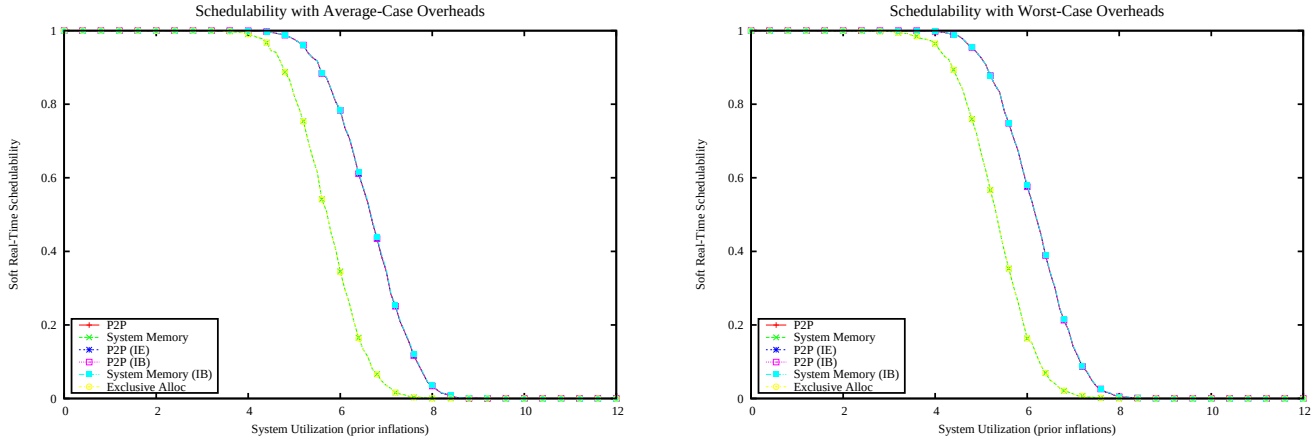

Figure 4780: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

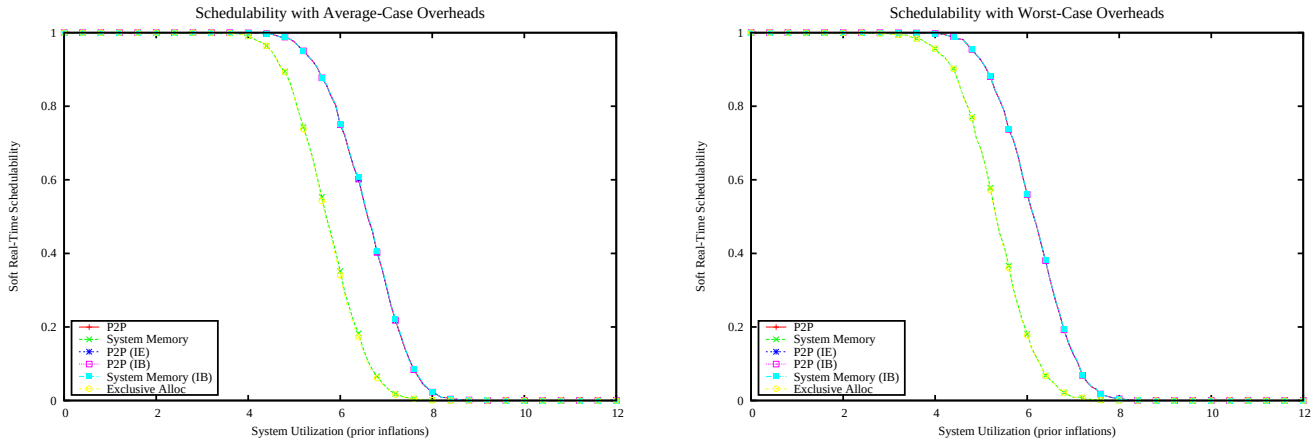

Figure 4781: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

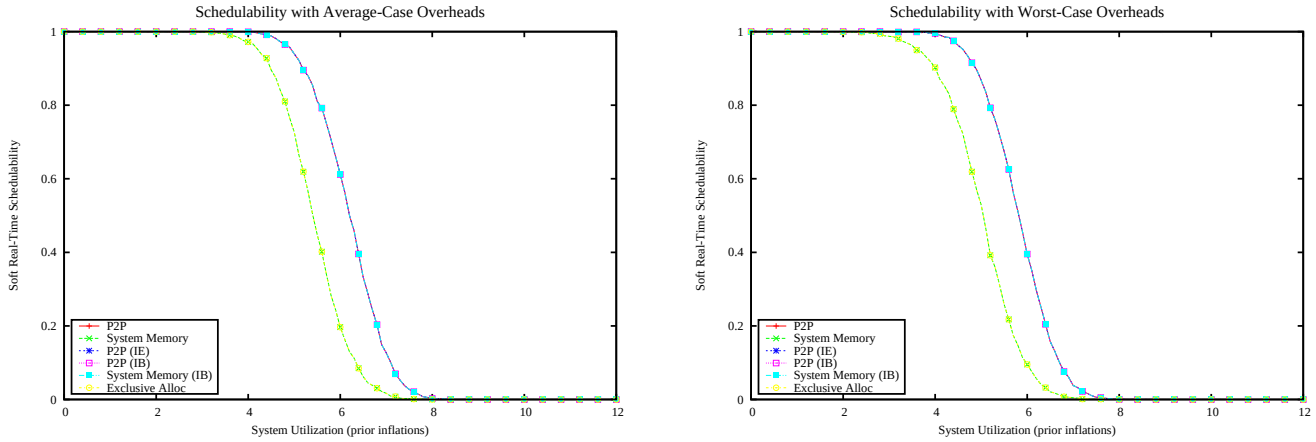

Figure 4782: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

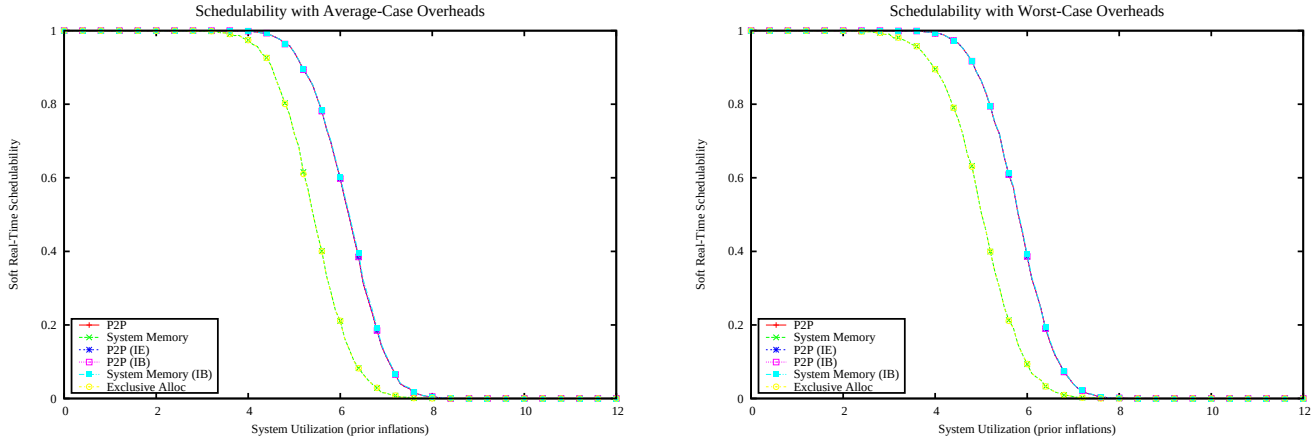

Figure 4783: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

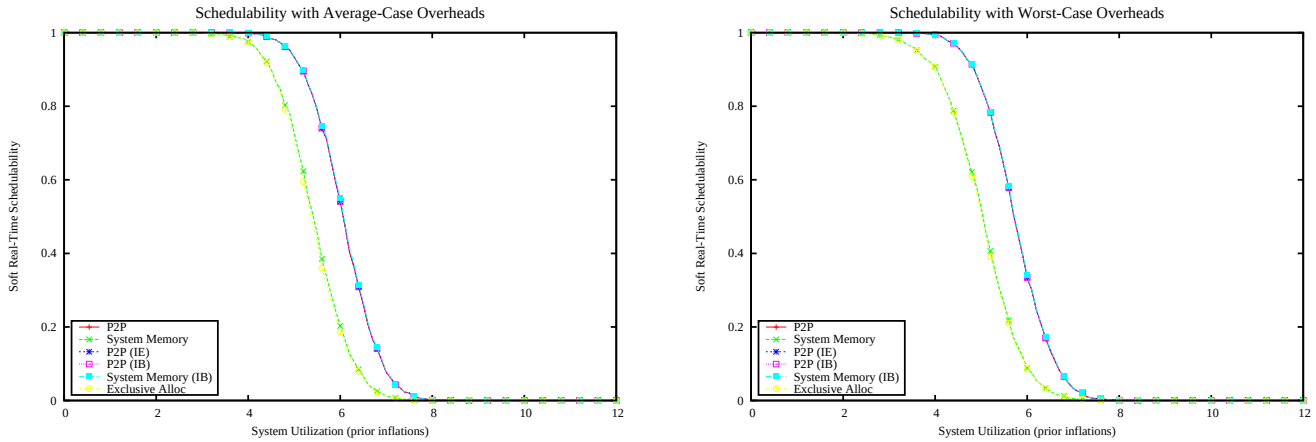

Figure 4784: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

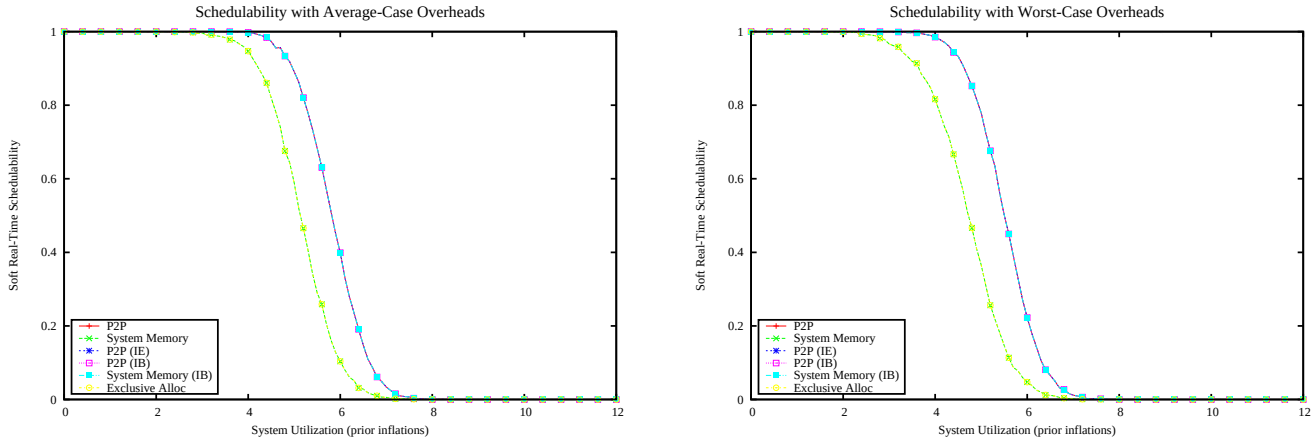

Figure 4785: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

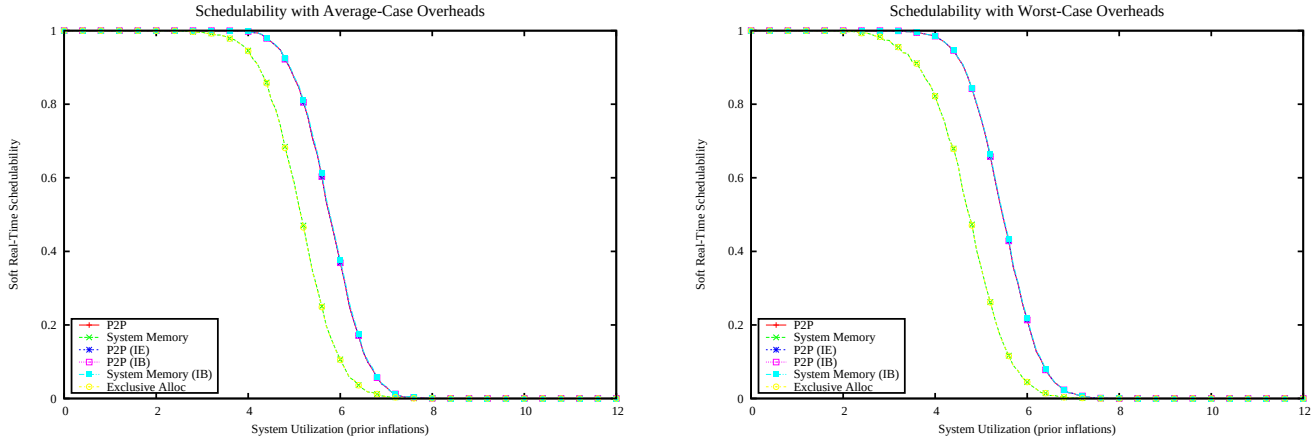

Figure 4786: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

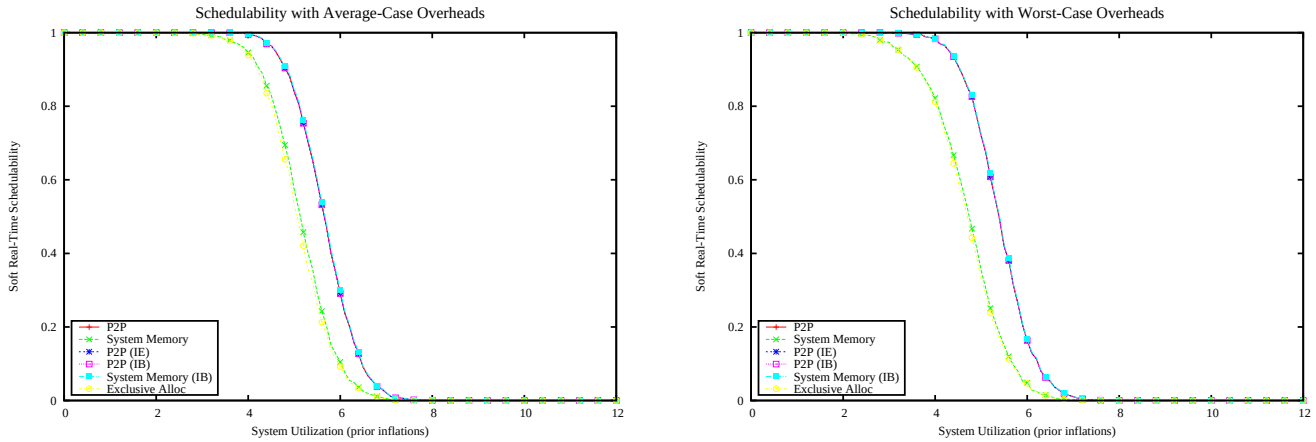

Figure 4787: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

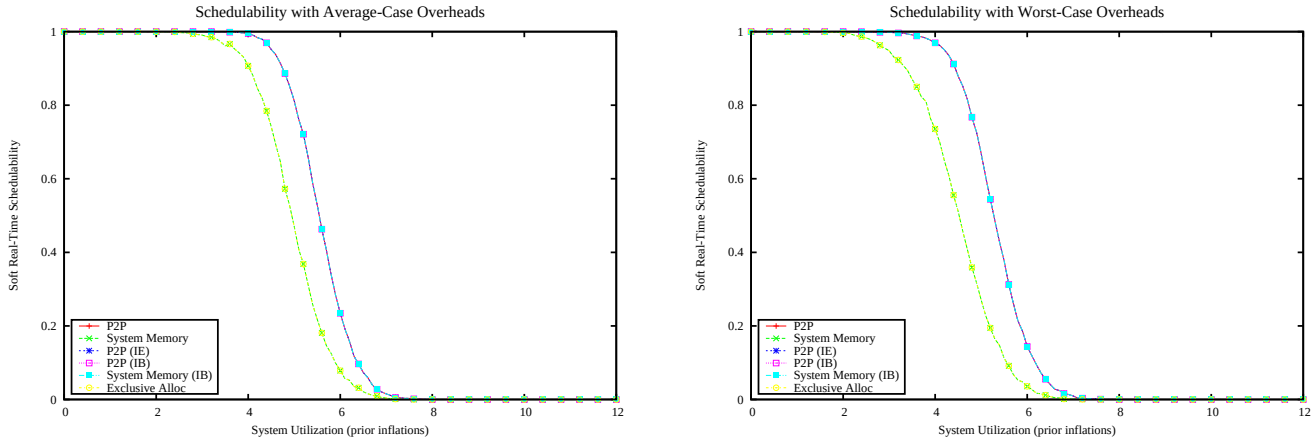

Figure 4788: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

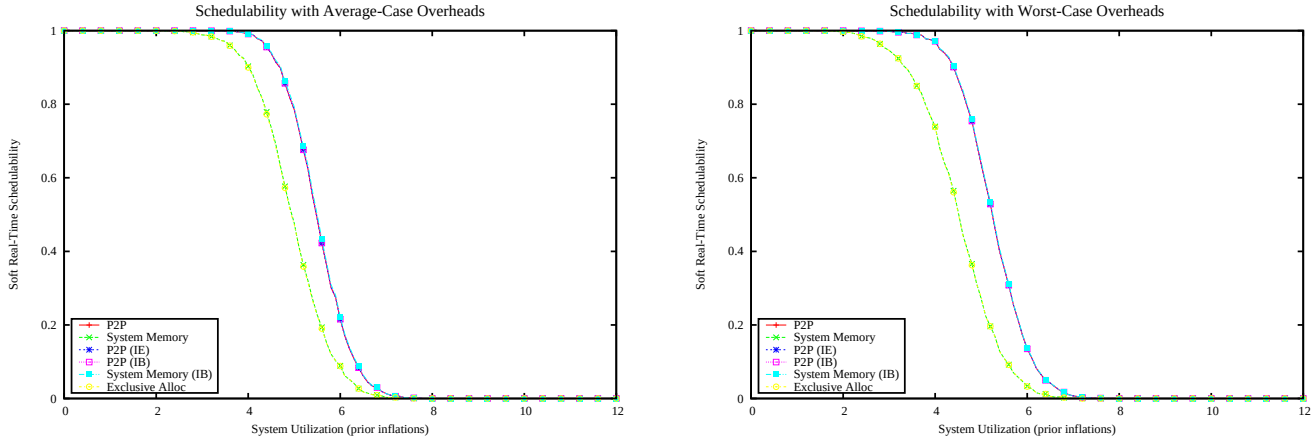

Figure 4789: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

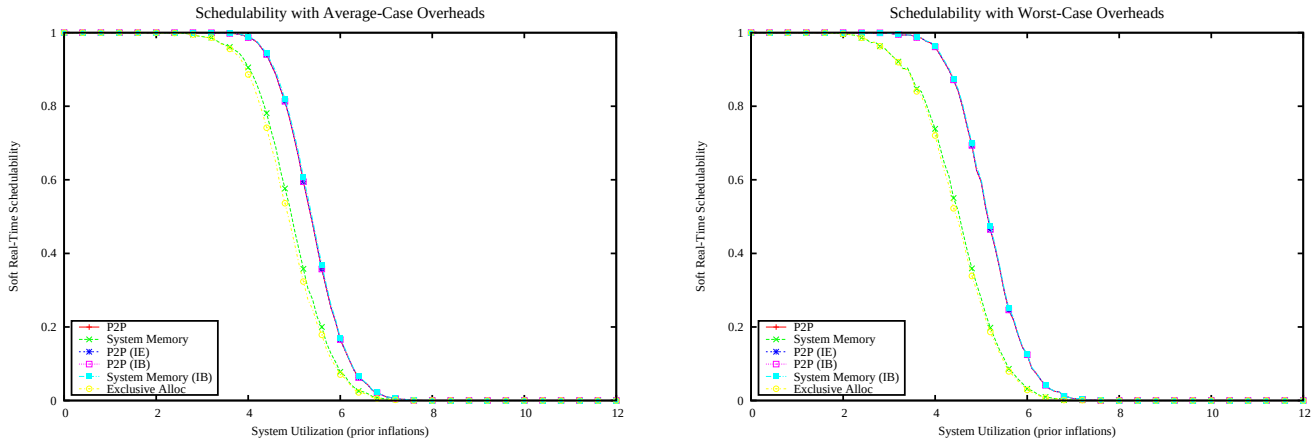

Figure 4790: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

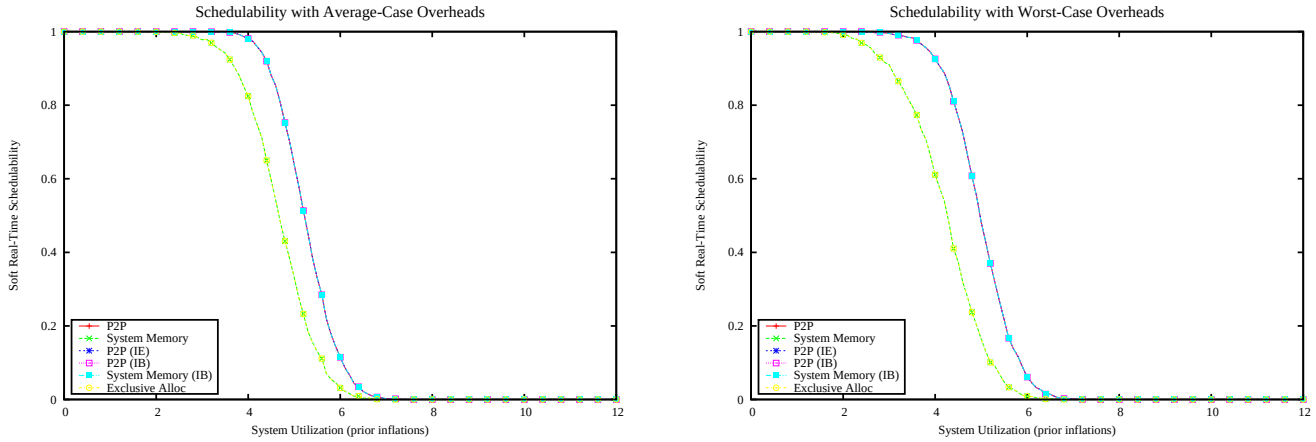

Figure 4791: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

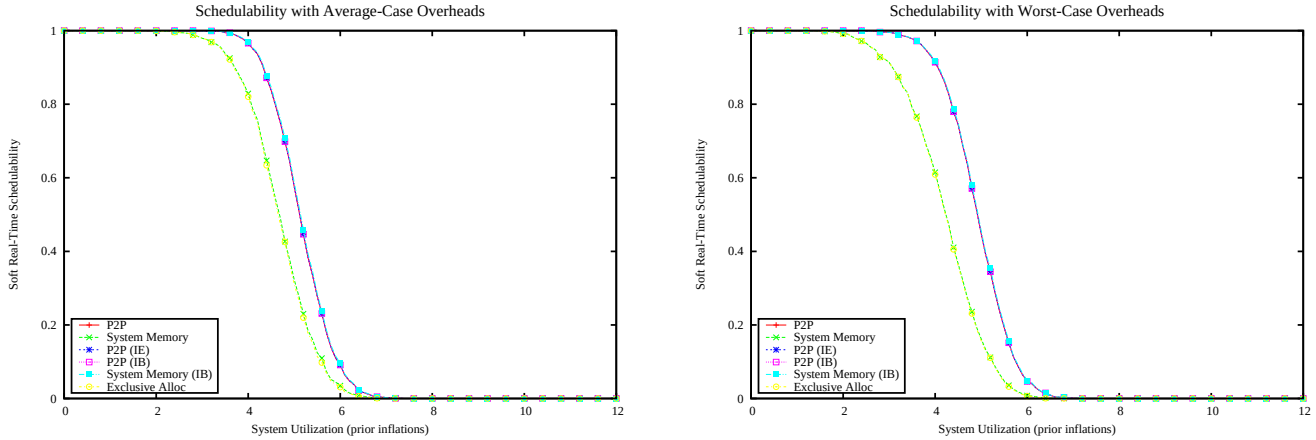

Figure 4792: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

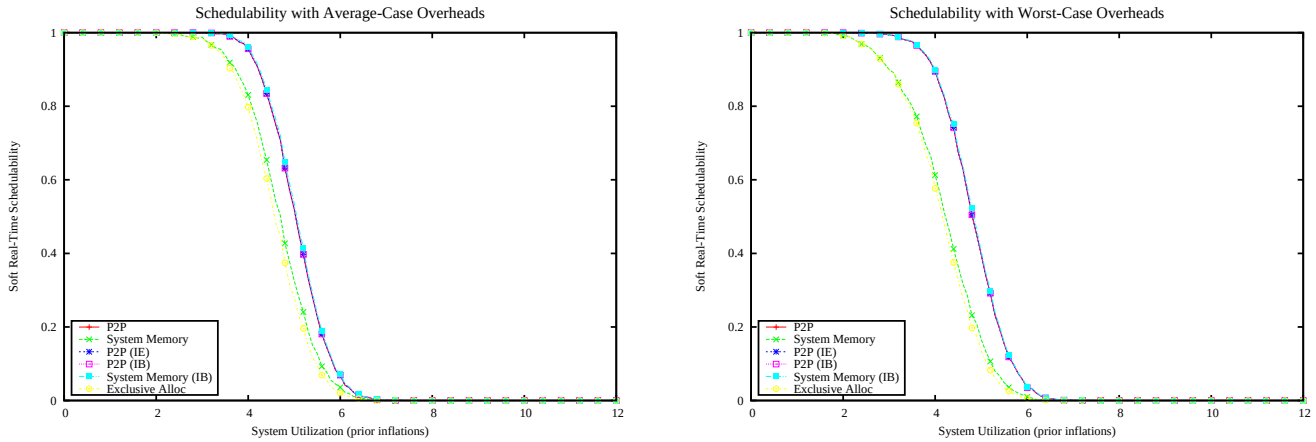

Figure 4793: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

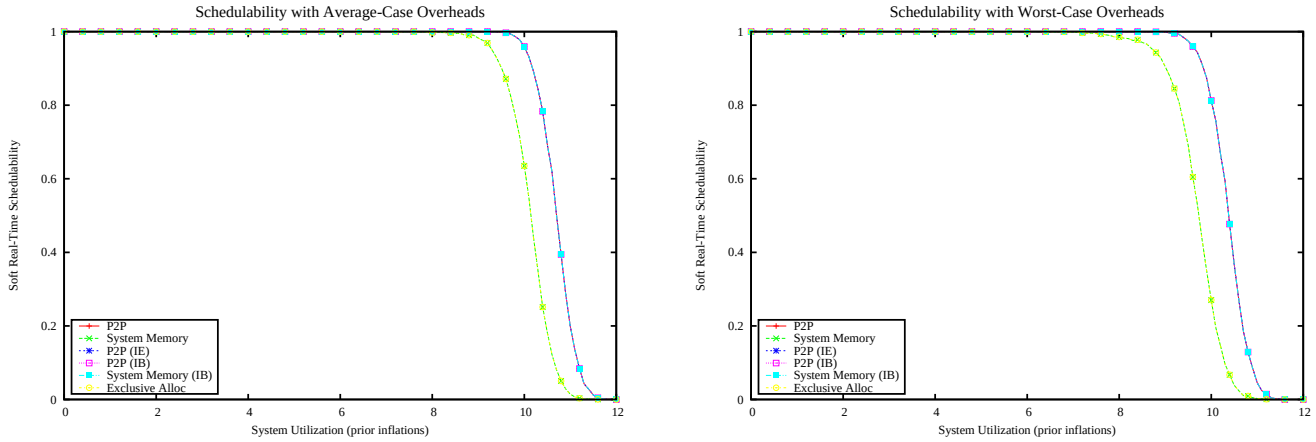

Figure 4794: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

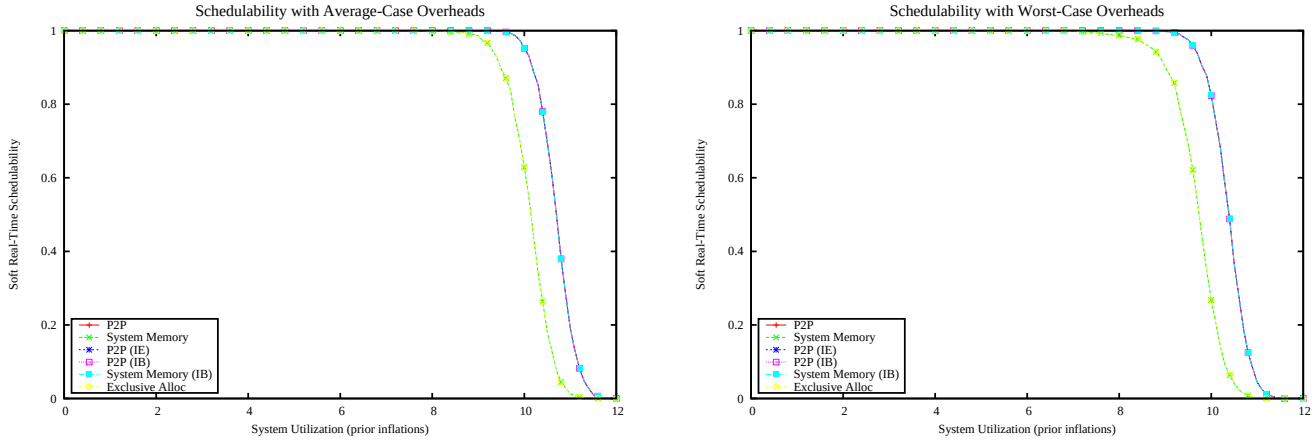

Figure 4795: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

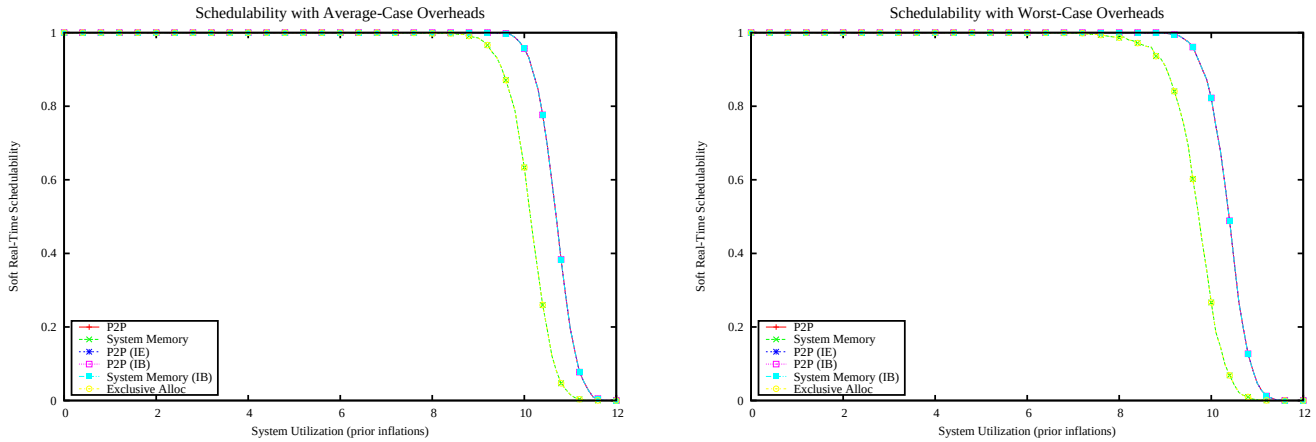

Figure 4796: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

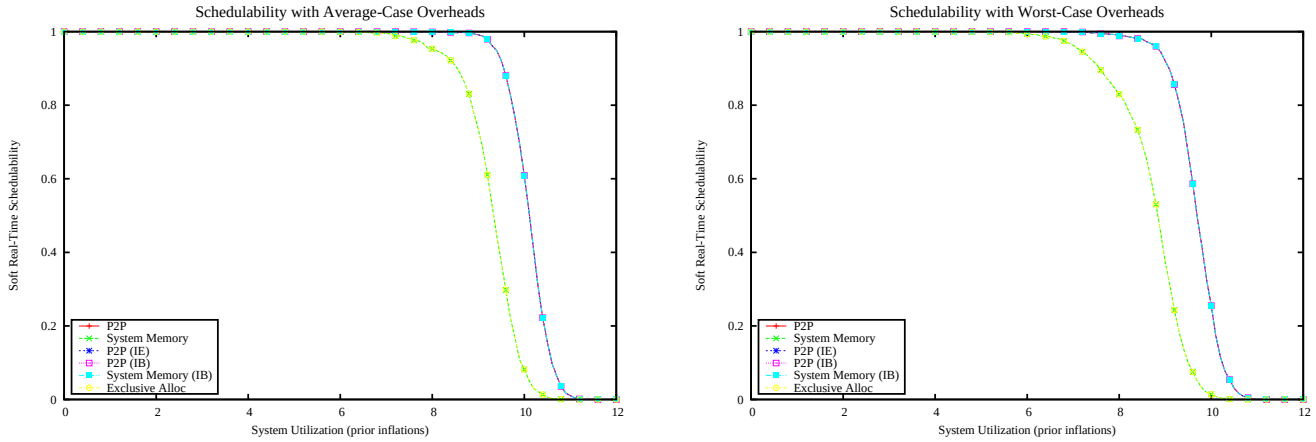

Figure 4797: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

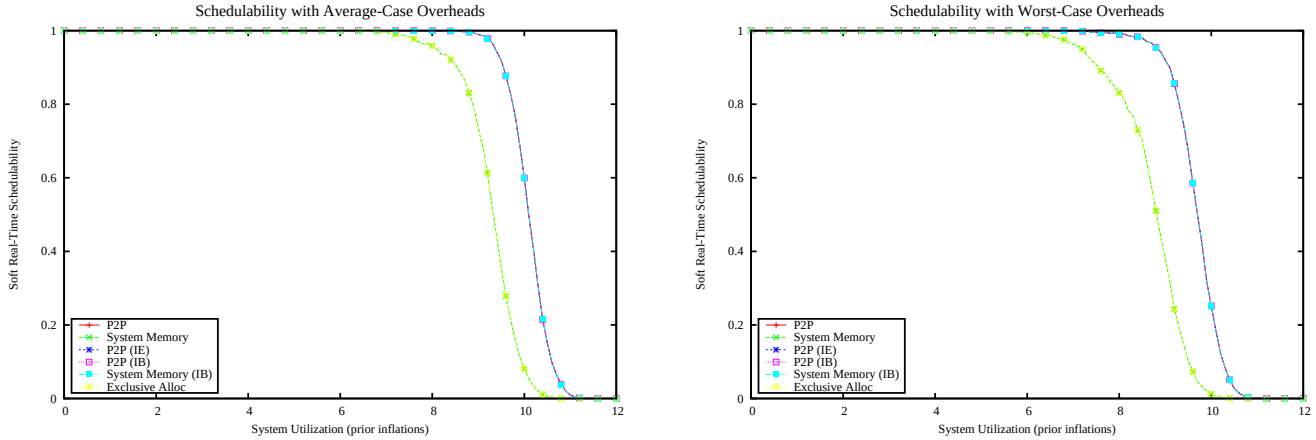

Figure 4798: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

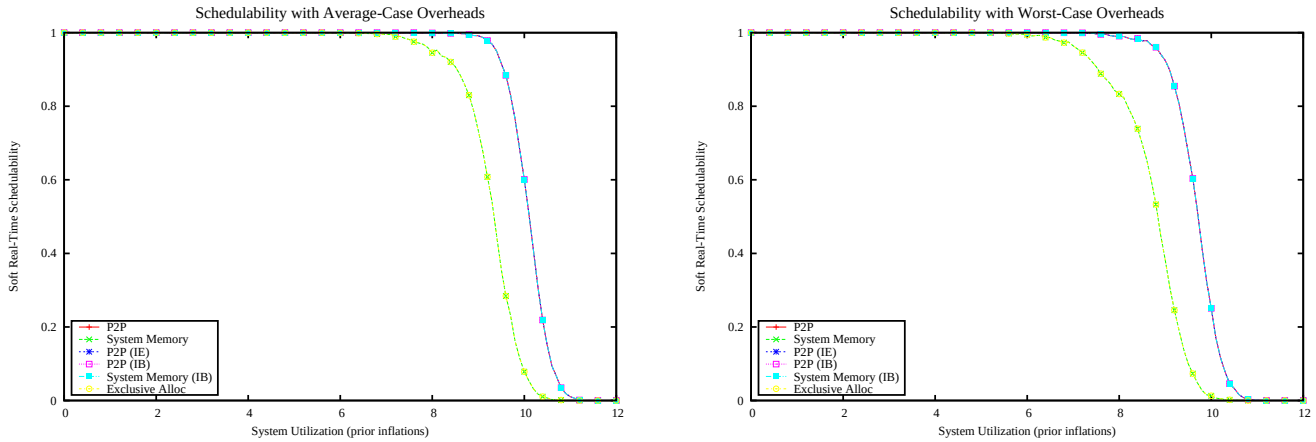

Figure 4799: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

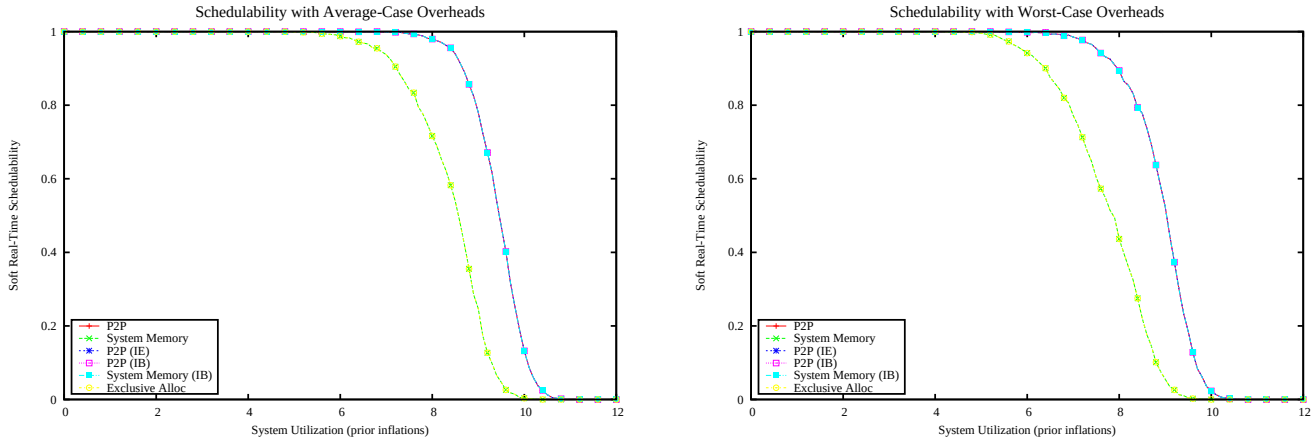

Figure 4800: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

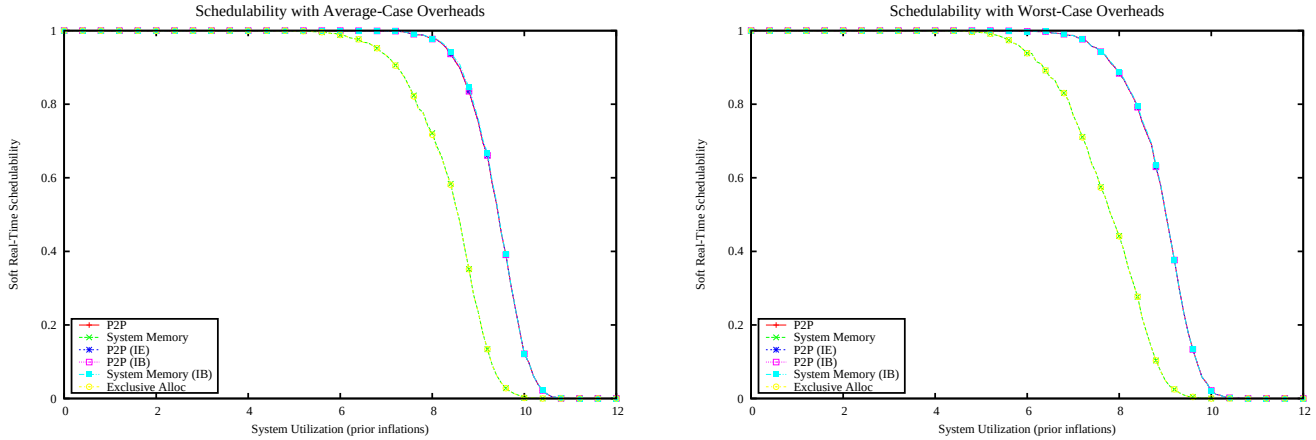

Figure 4801: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

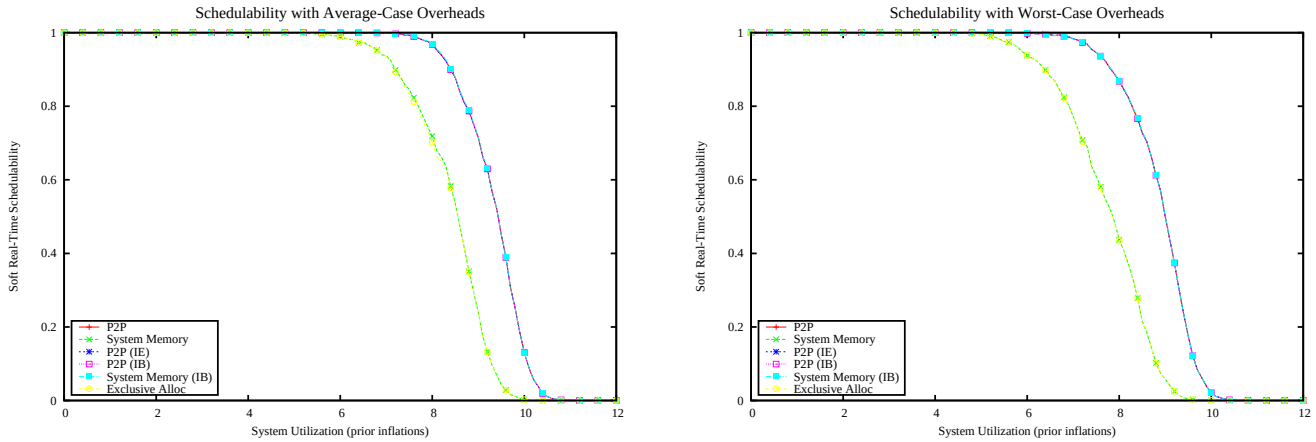

Figure 4802: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

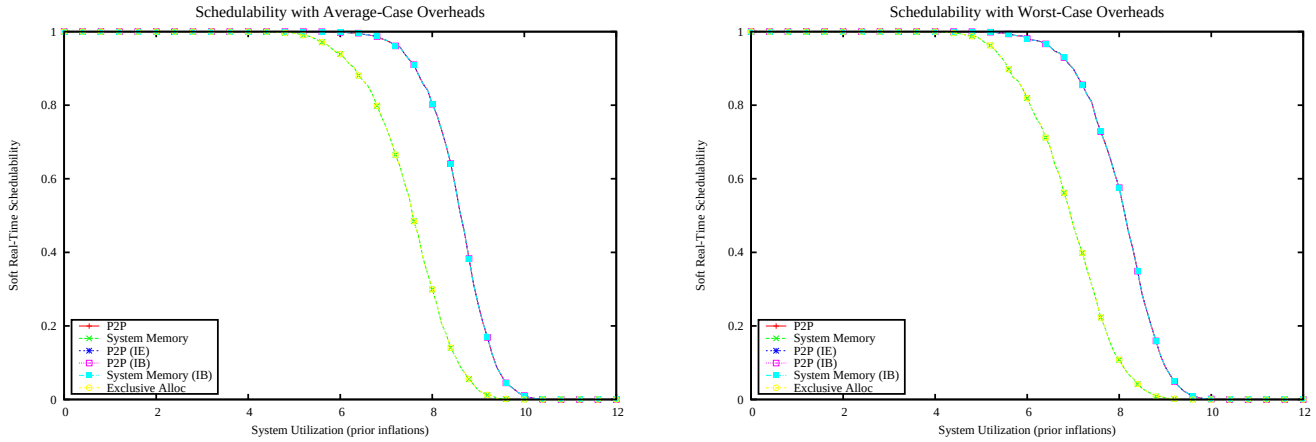

Figure 4803: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

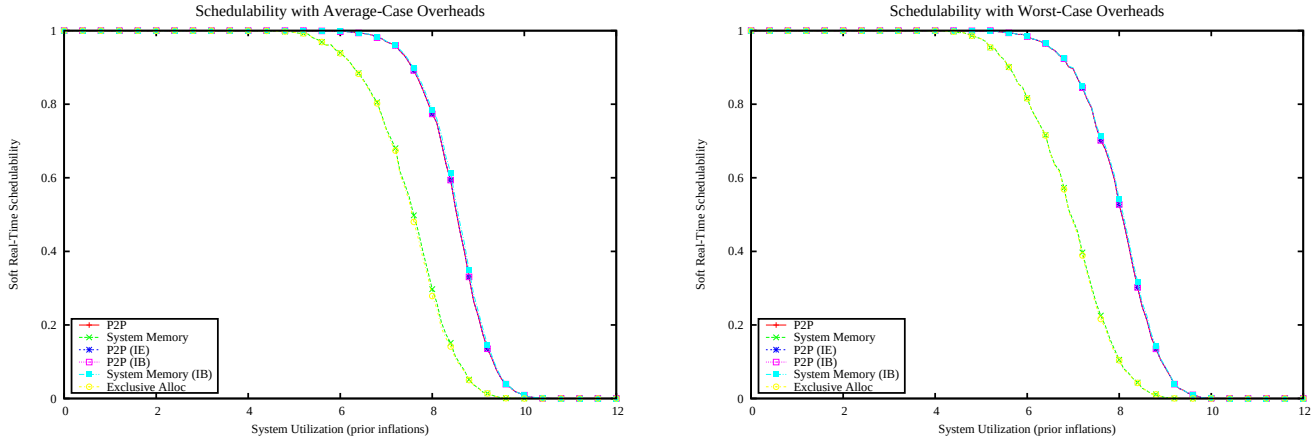

Figure 4804: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

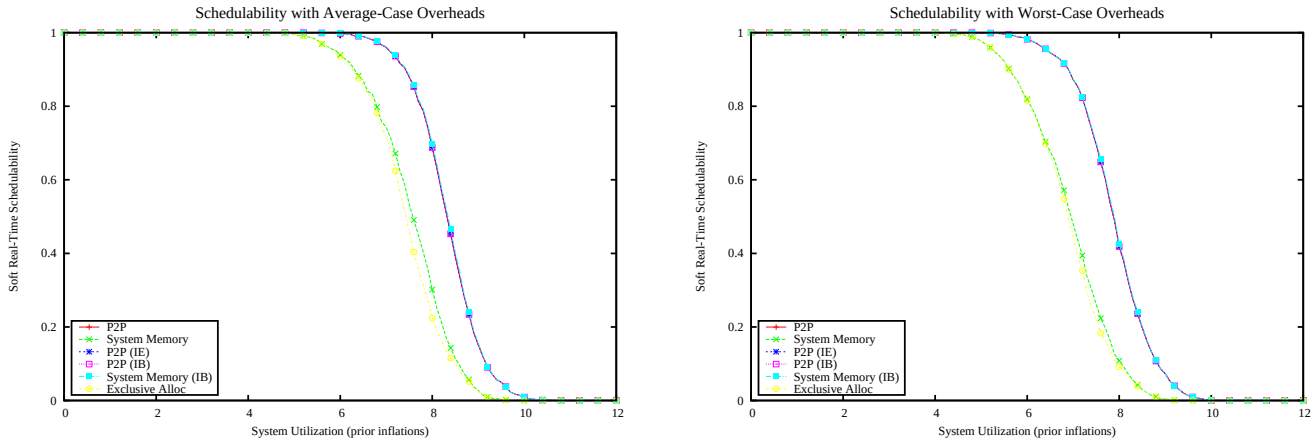

Figure 4805: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

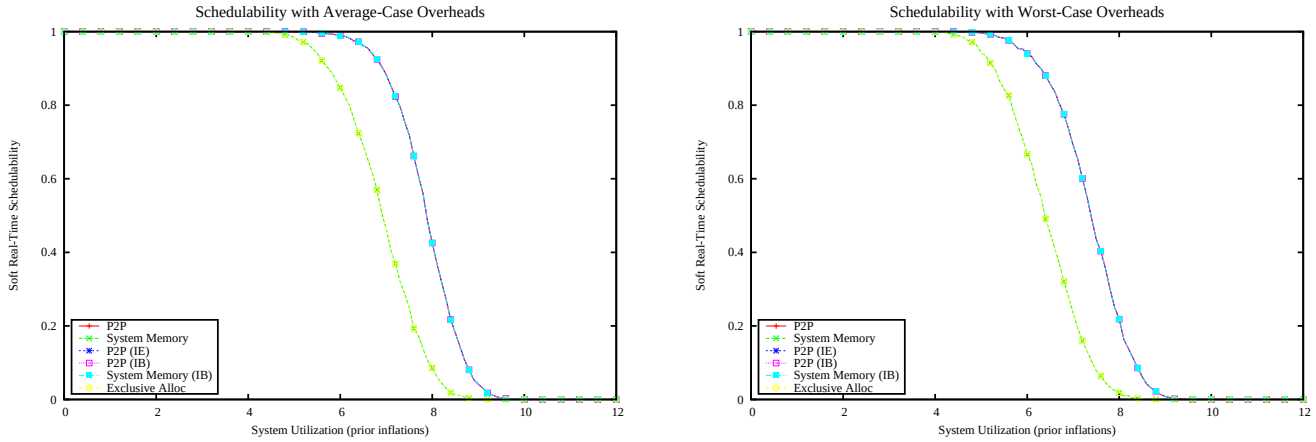

Figure 4806: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

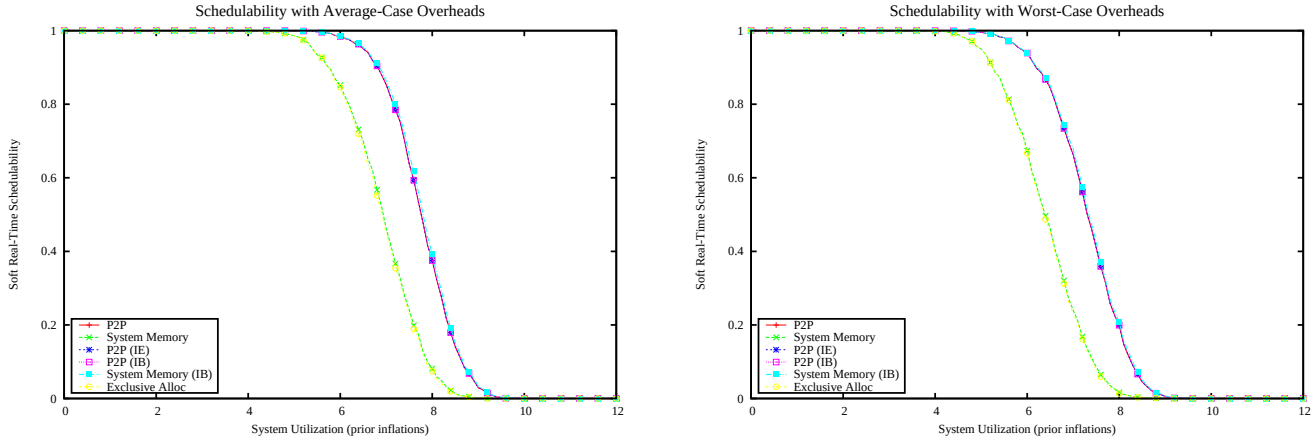

Figure 4807: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

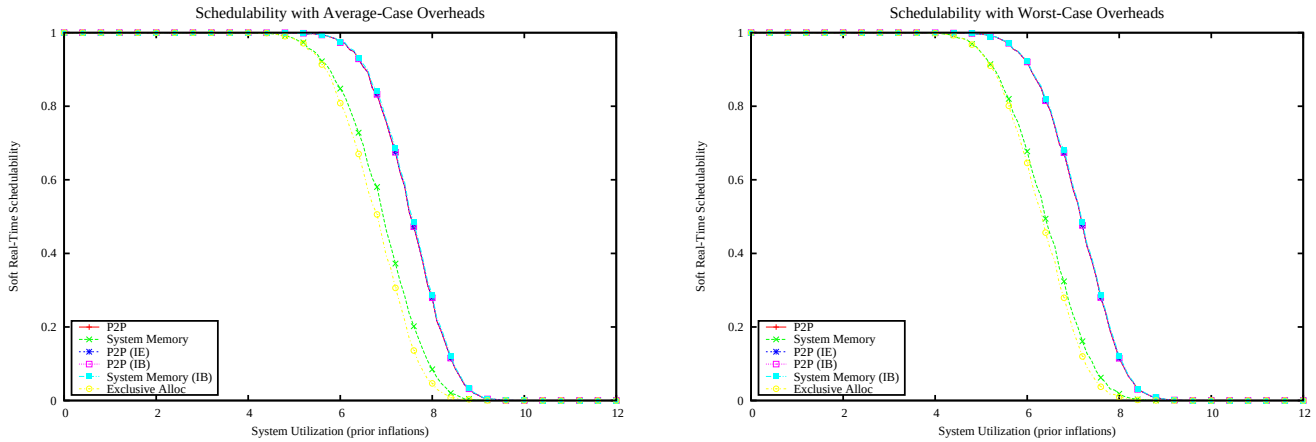

Figure 4808: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

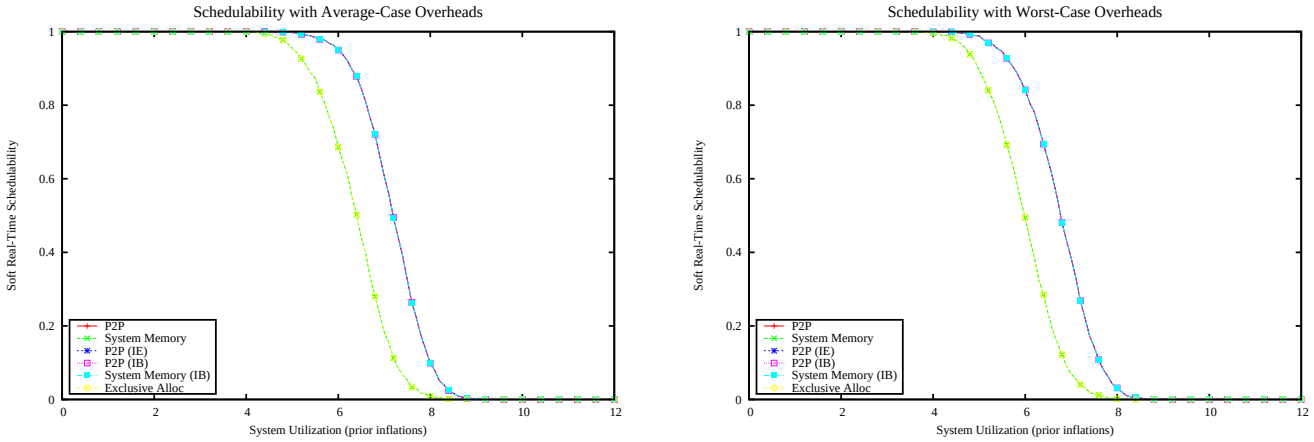

Figure 4809: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

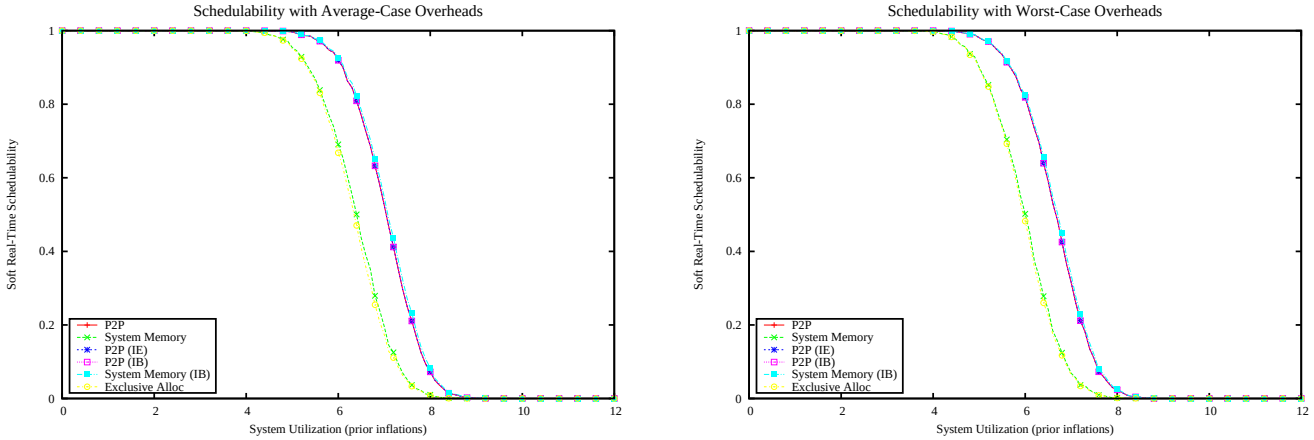

Figure 4810: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

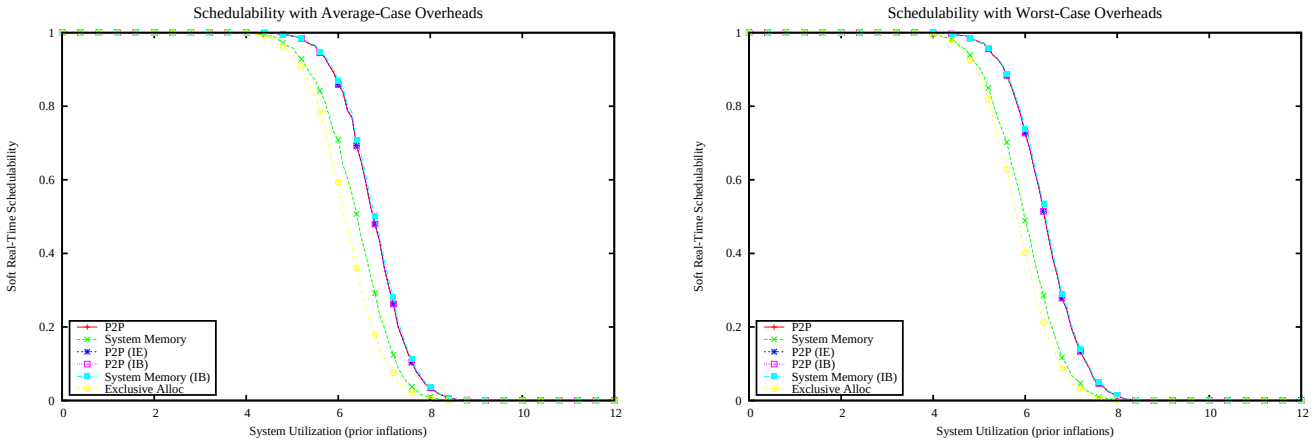

Figure 4811: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

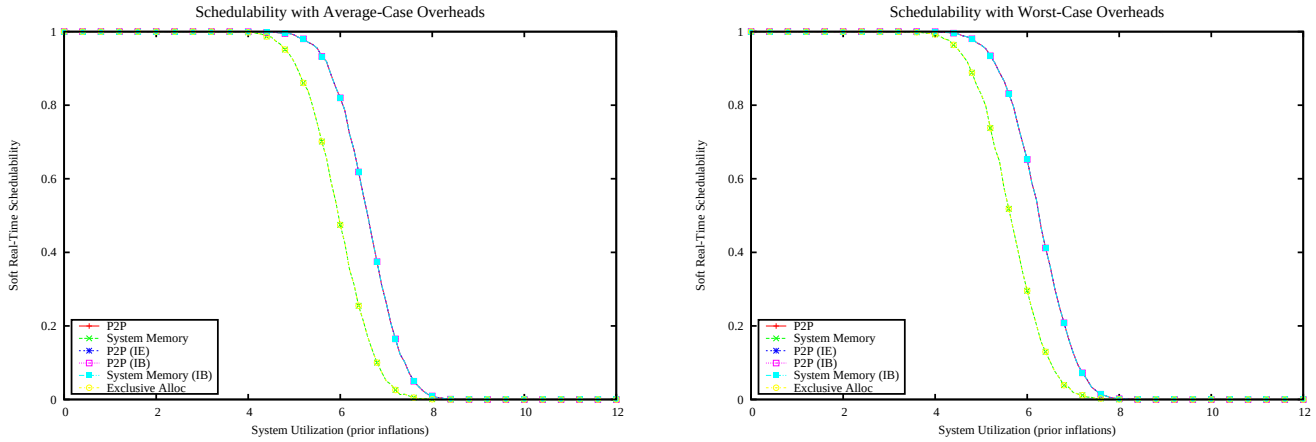

Figure 4812: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

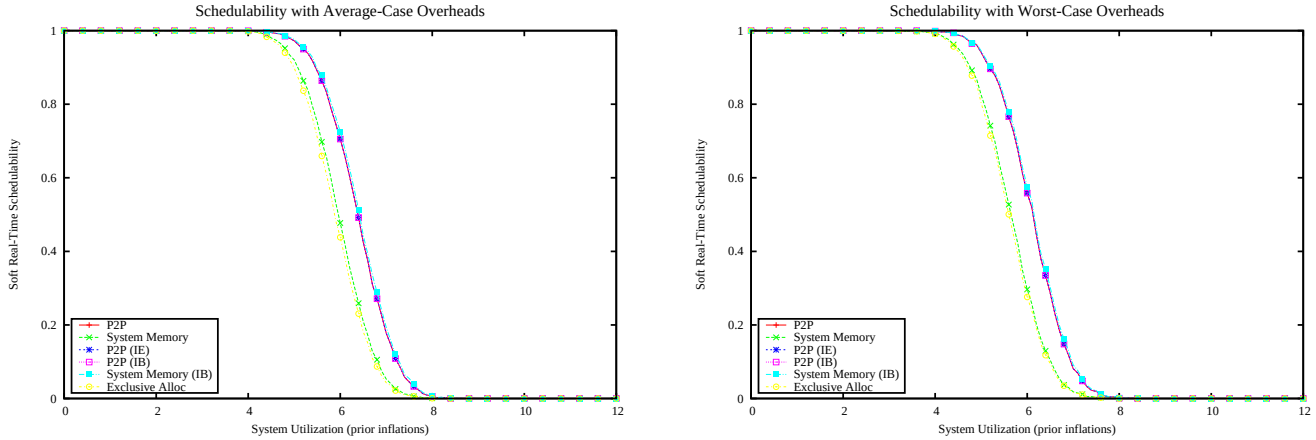

Figure 4813: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

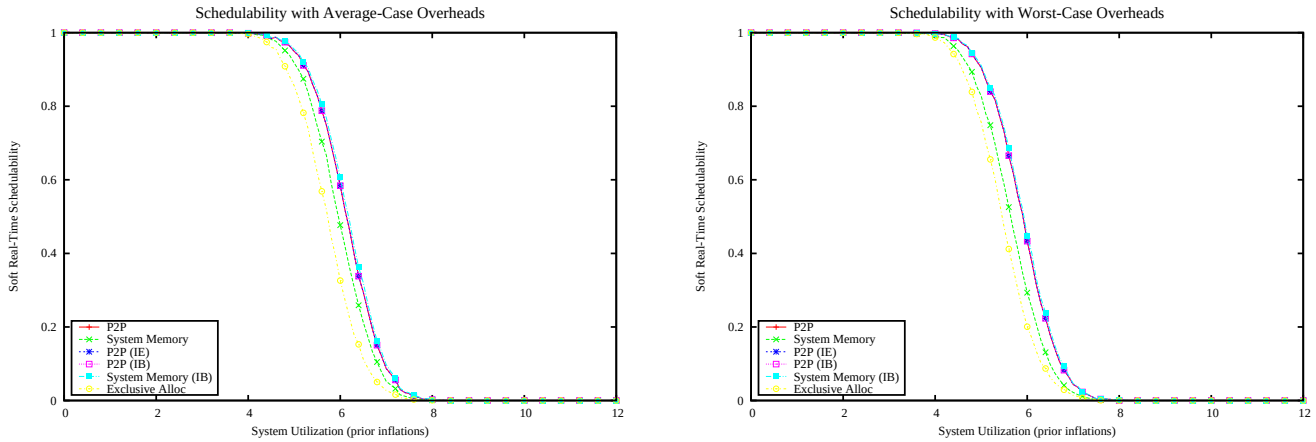

Figure 4814: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

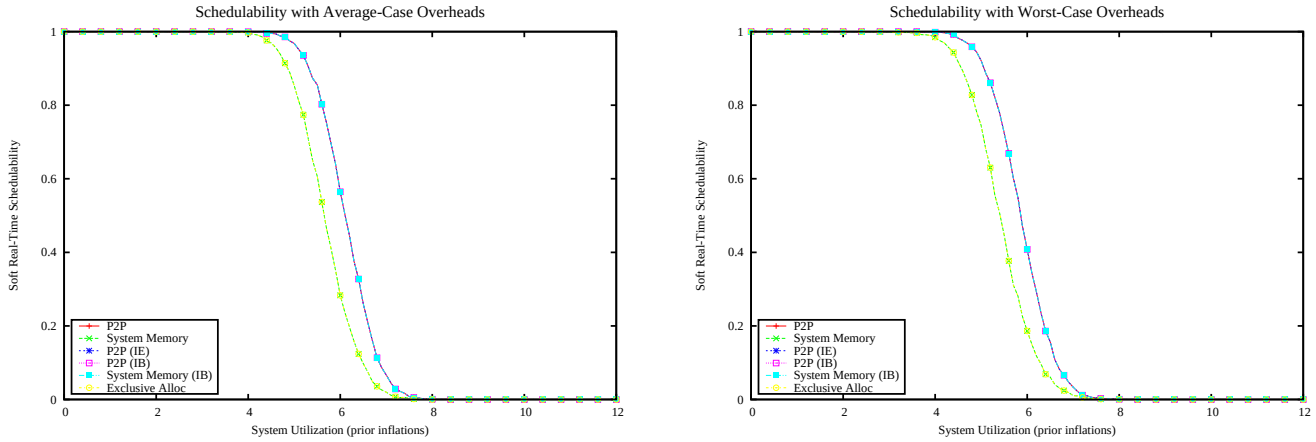

Figure 4815: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

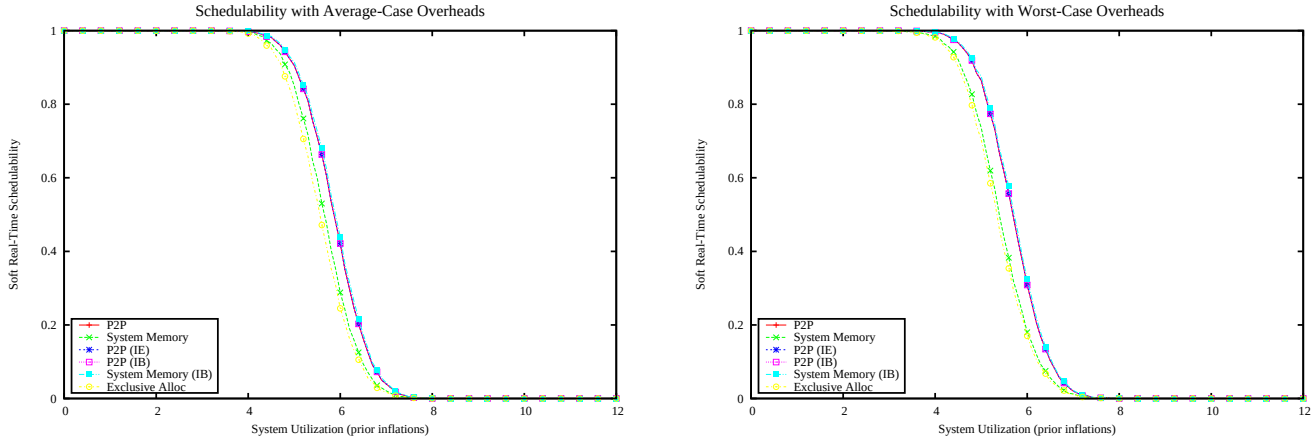

Figure 4816: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

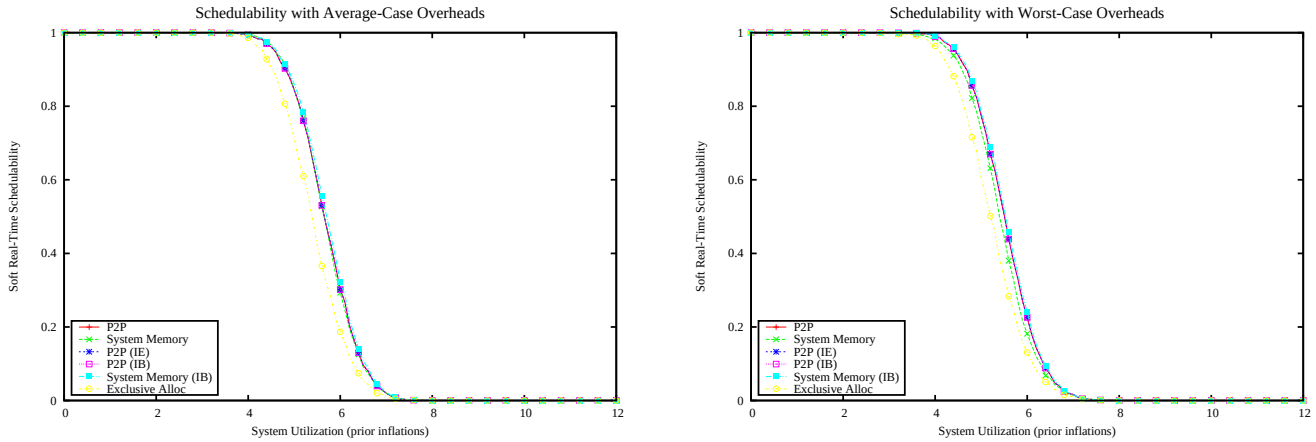

Figure 4817: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

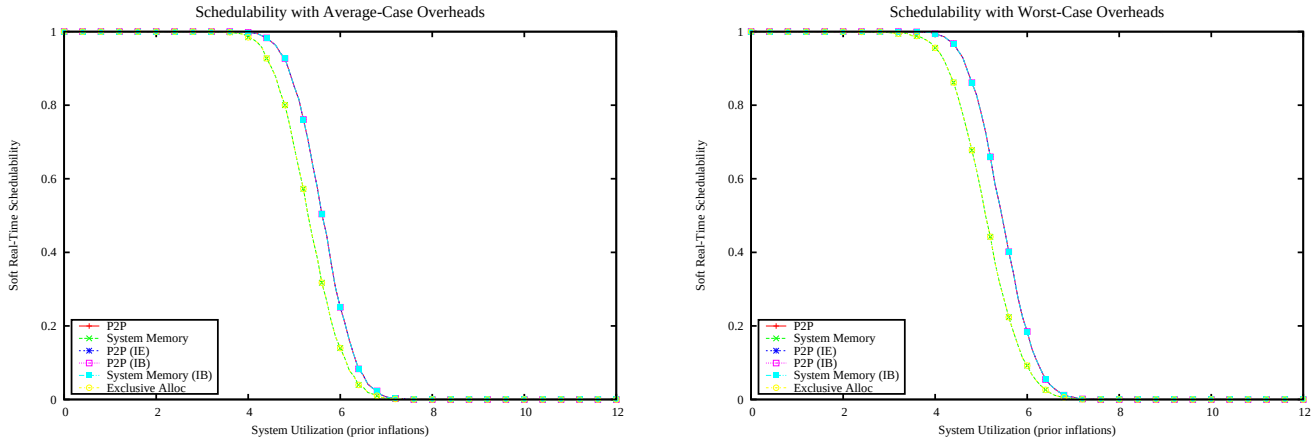

Figure 4818: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

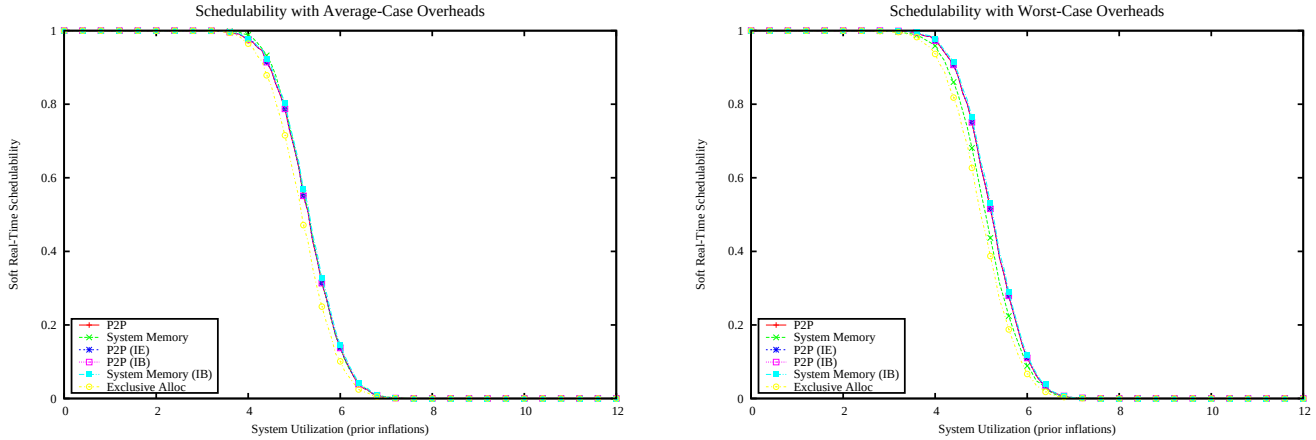

Figure 4819: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

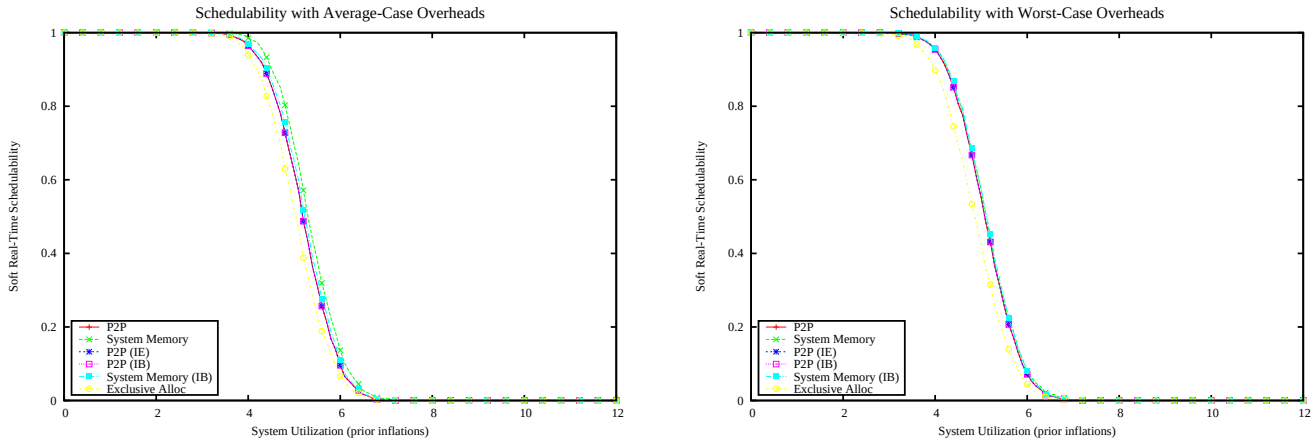

Figure 4820: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

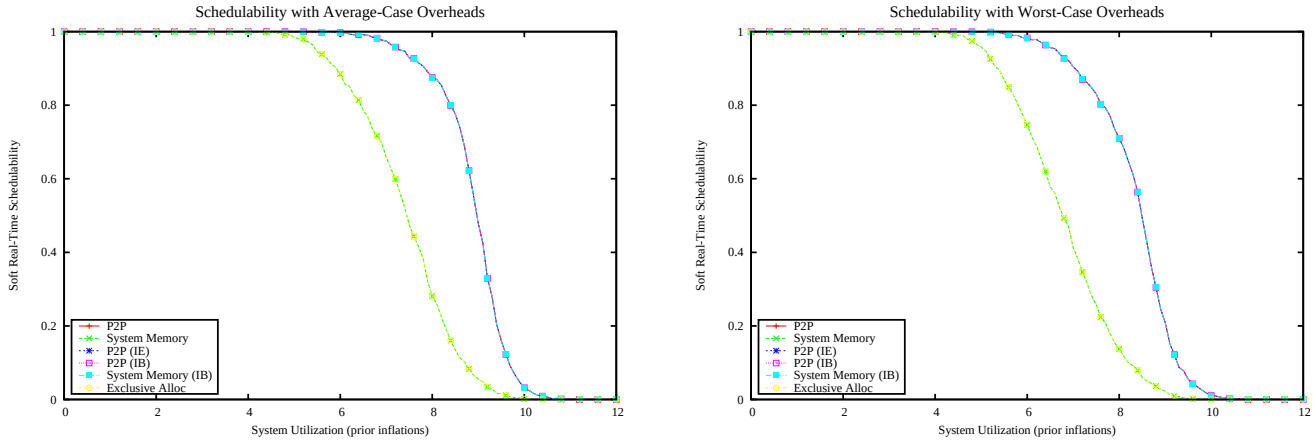

Figure 4821: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

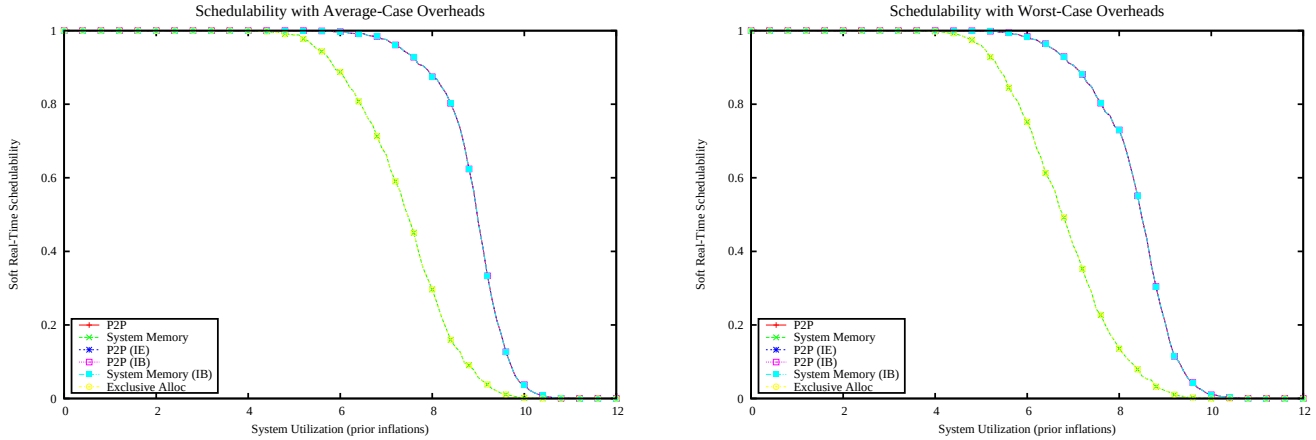

Figure 4822: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

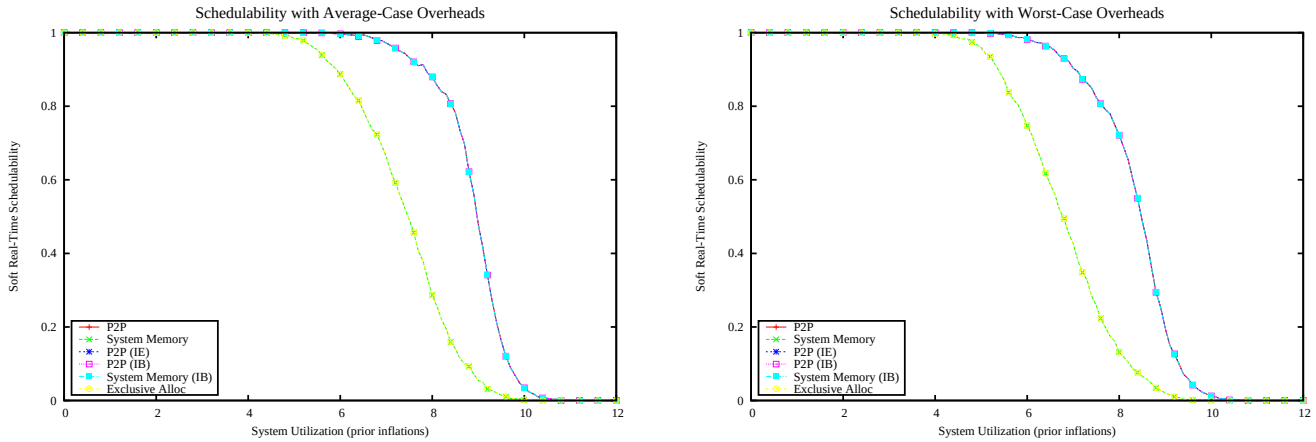

Figure 4823: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

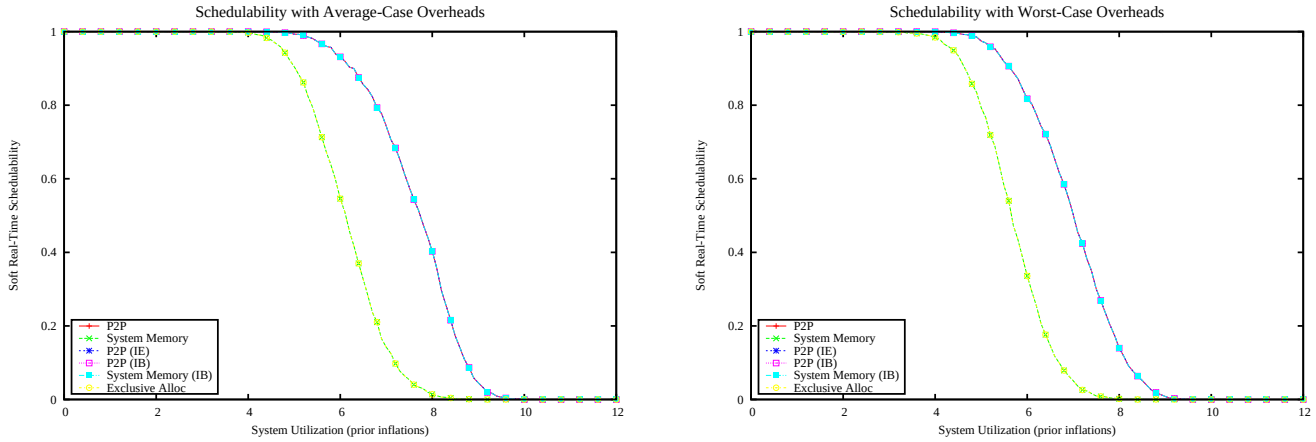

Figure 4824: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

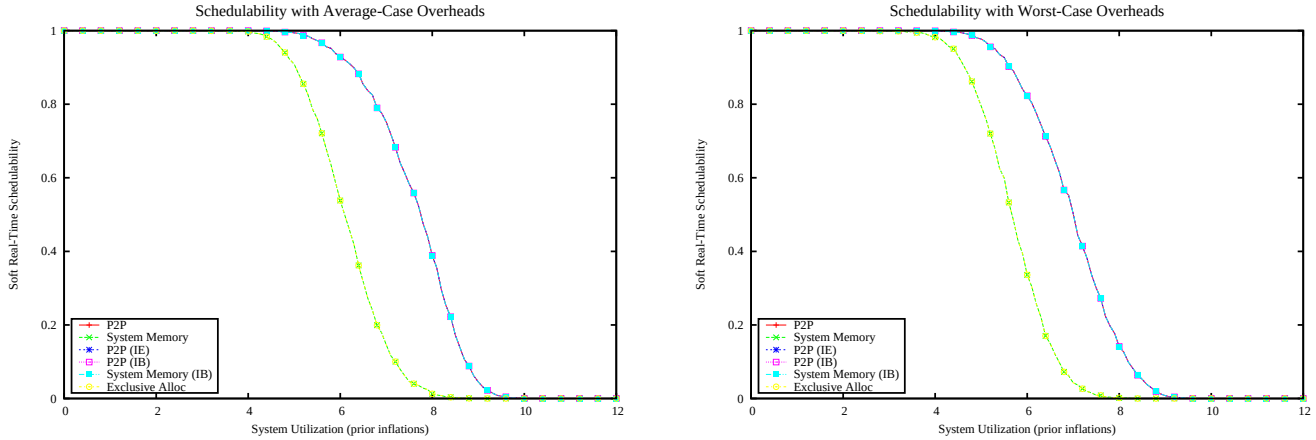

Figure 4825: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

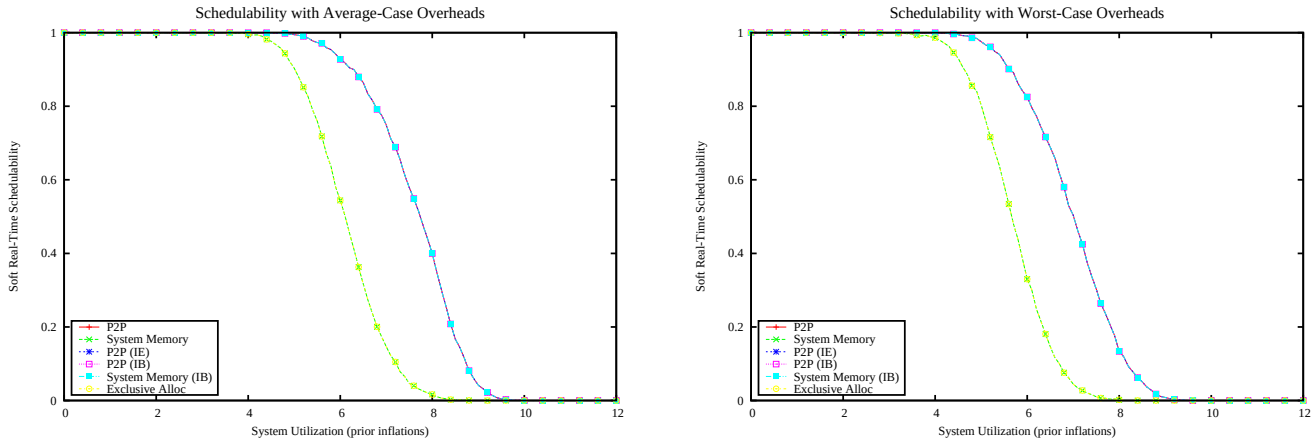

Figure 4826: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

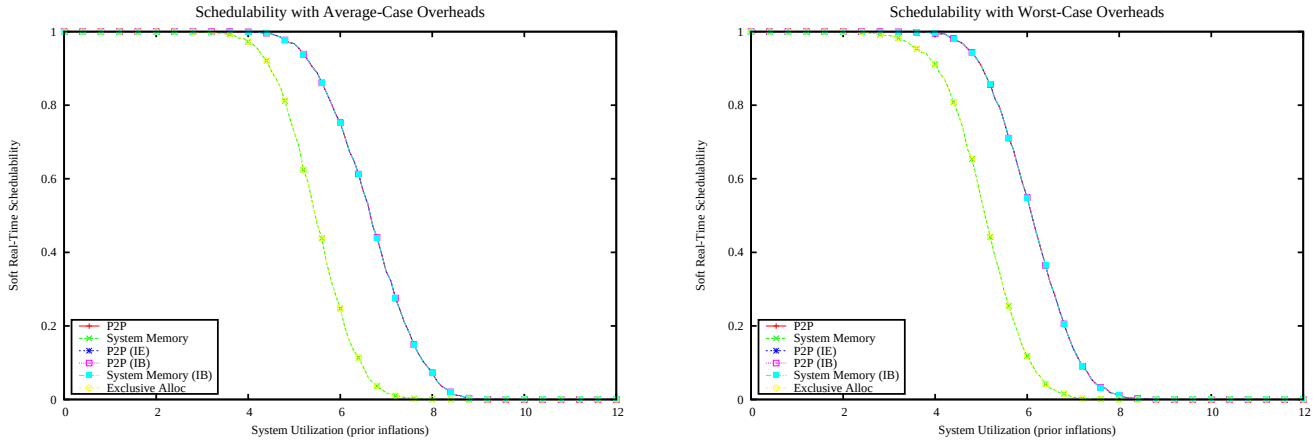

Figure 4827: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

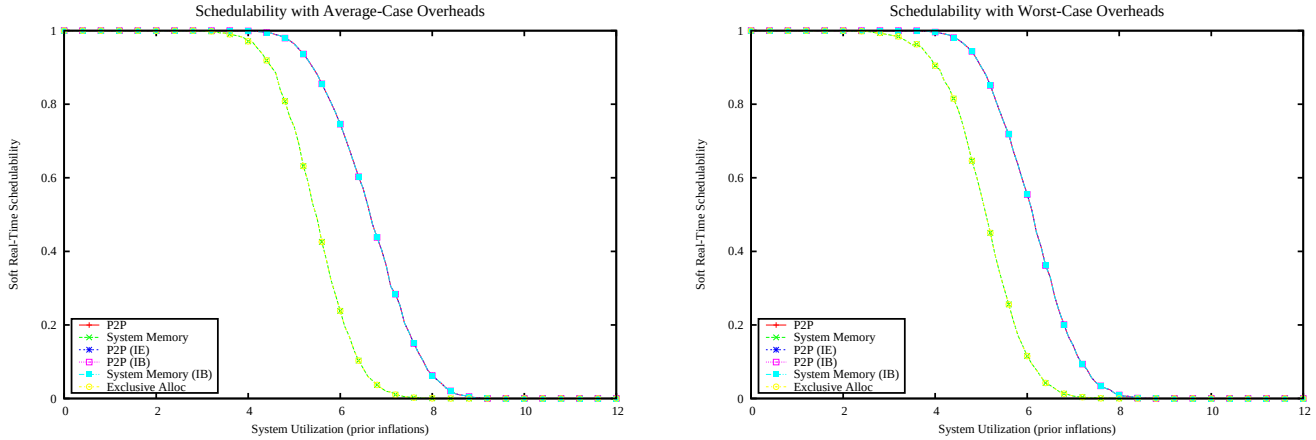

Figure 4828: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

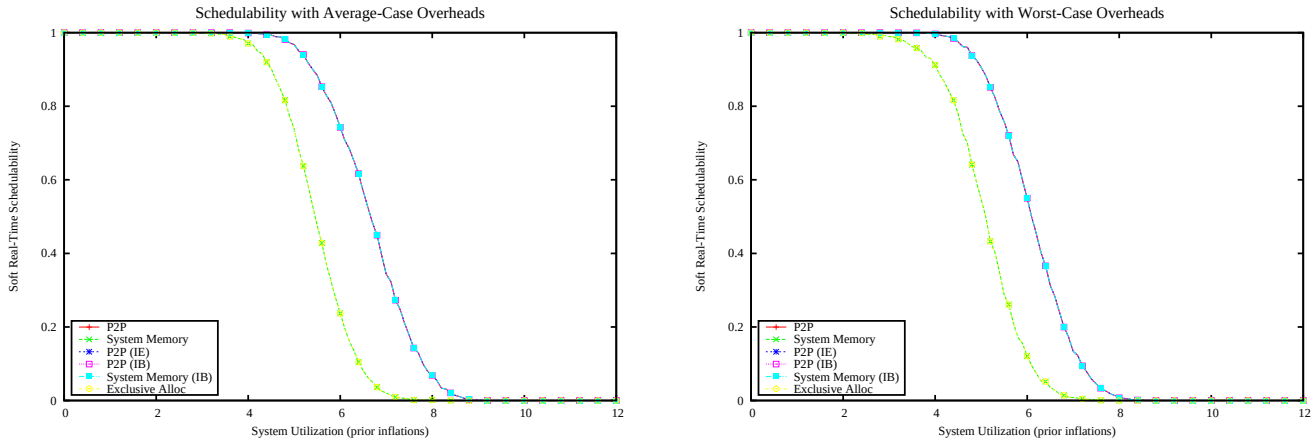

Figure 4829: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

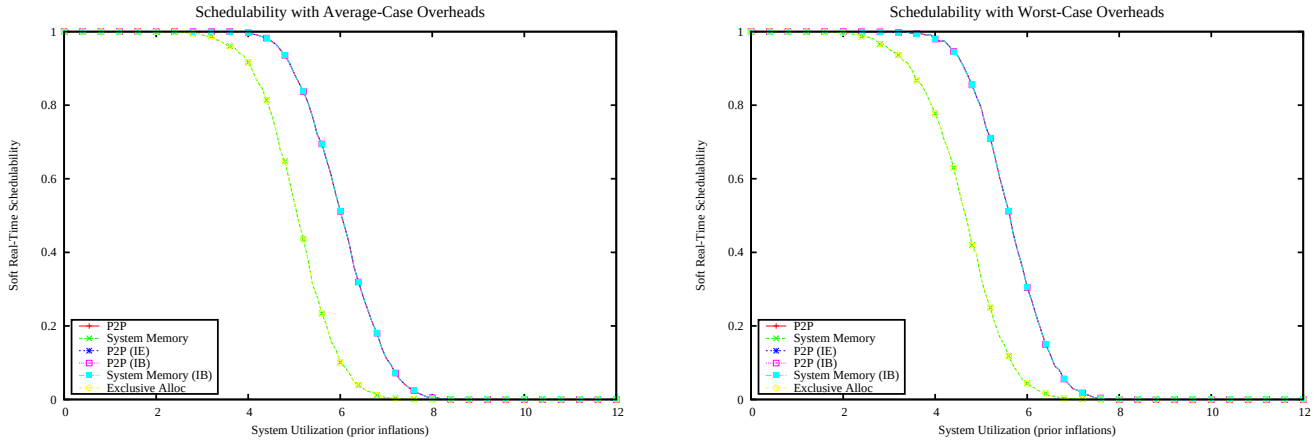

Figure 4830: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

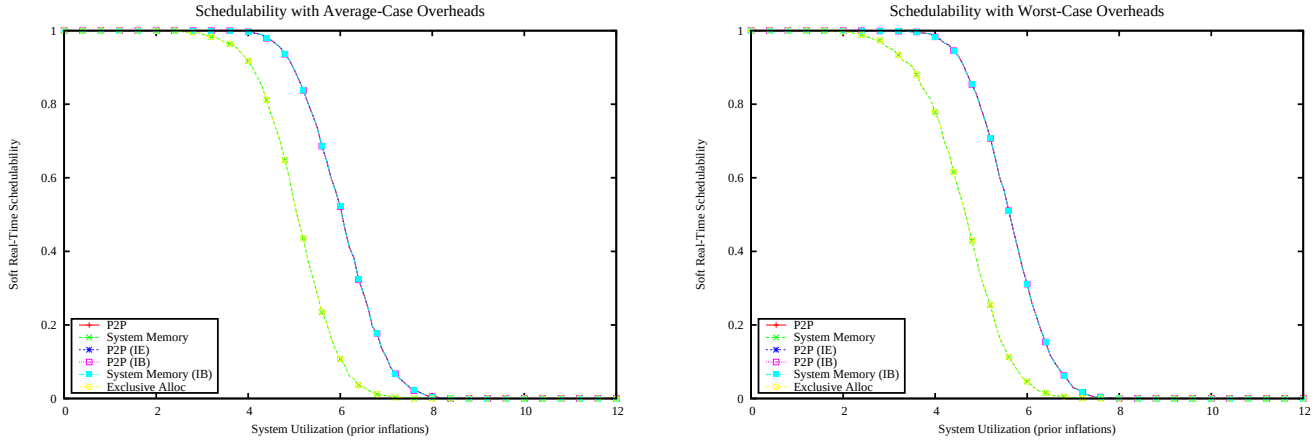

Figure 4831: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

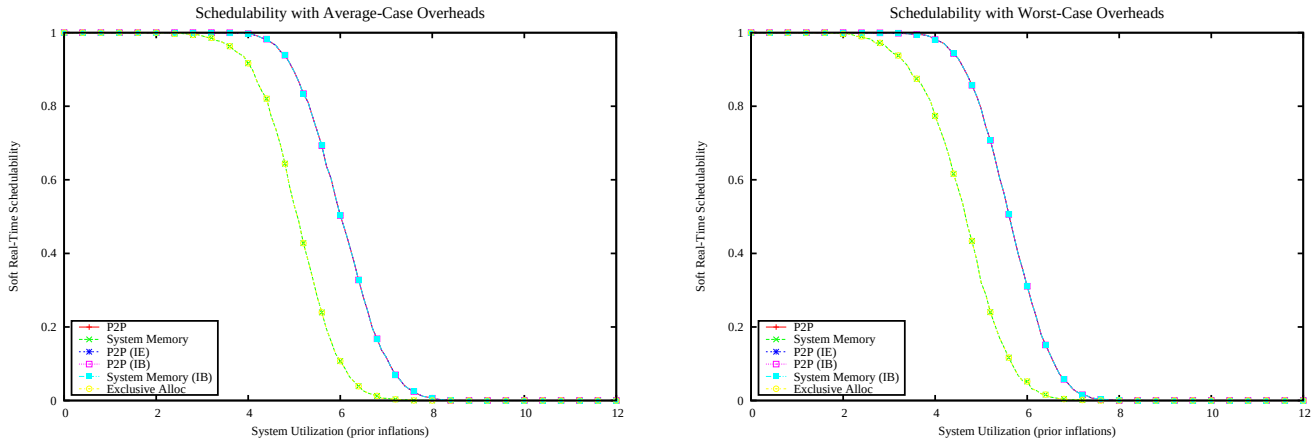

Figure 4832: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

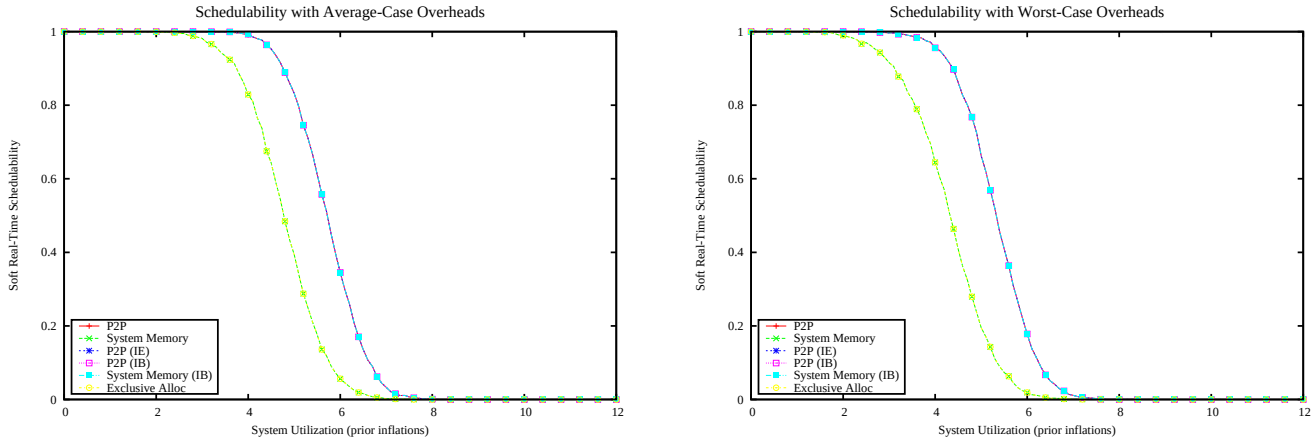

Figure 4833: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

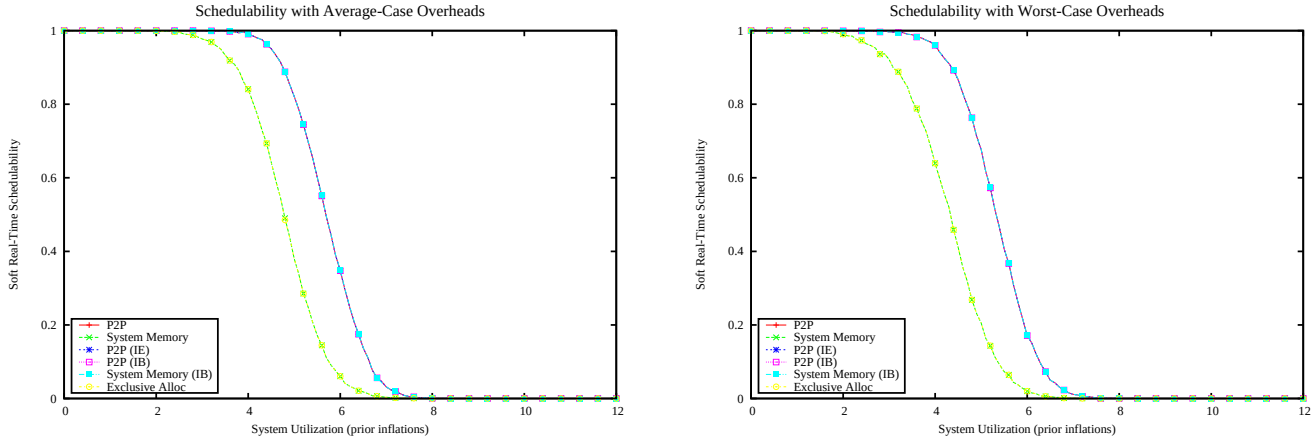

Figure 4834: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

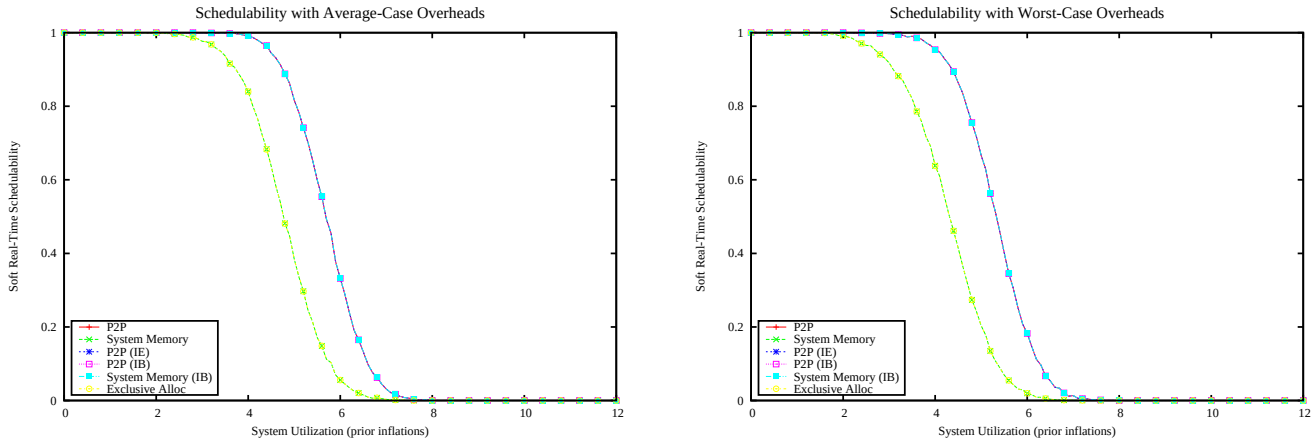

Figure 4835: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

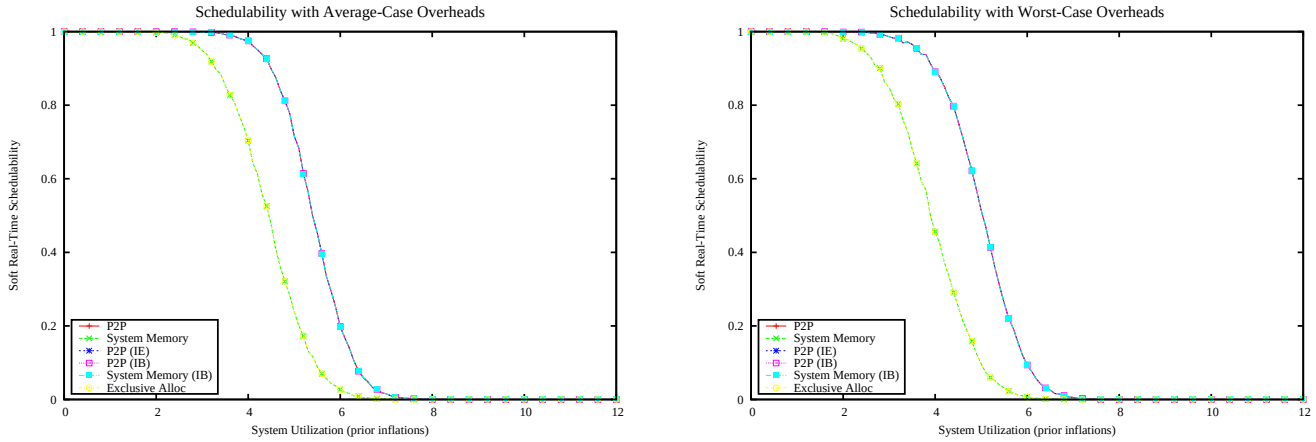

Figure 4836: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

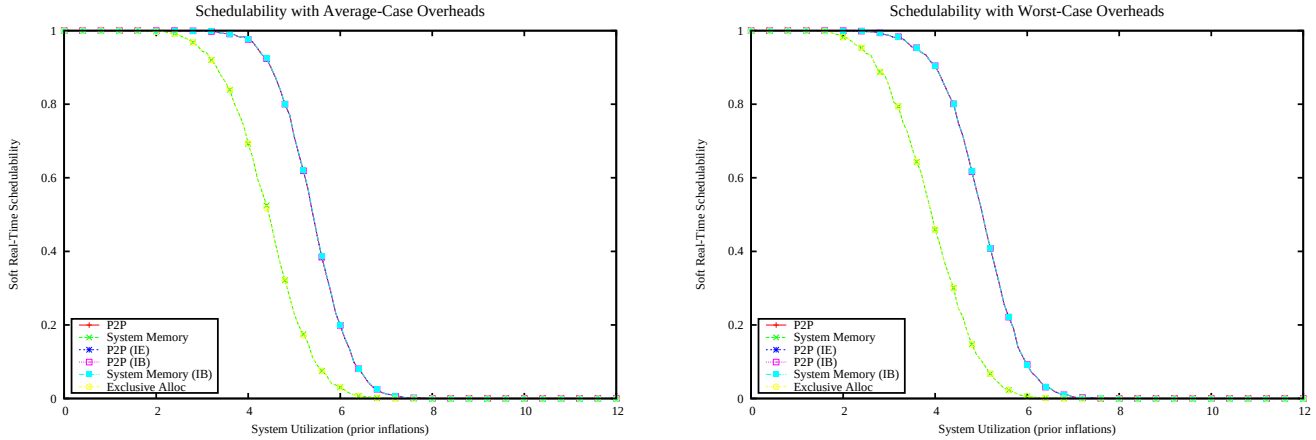

Figure 4837: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

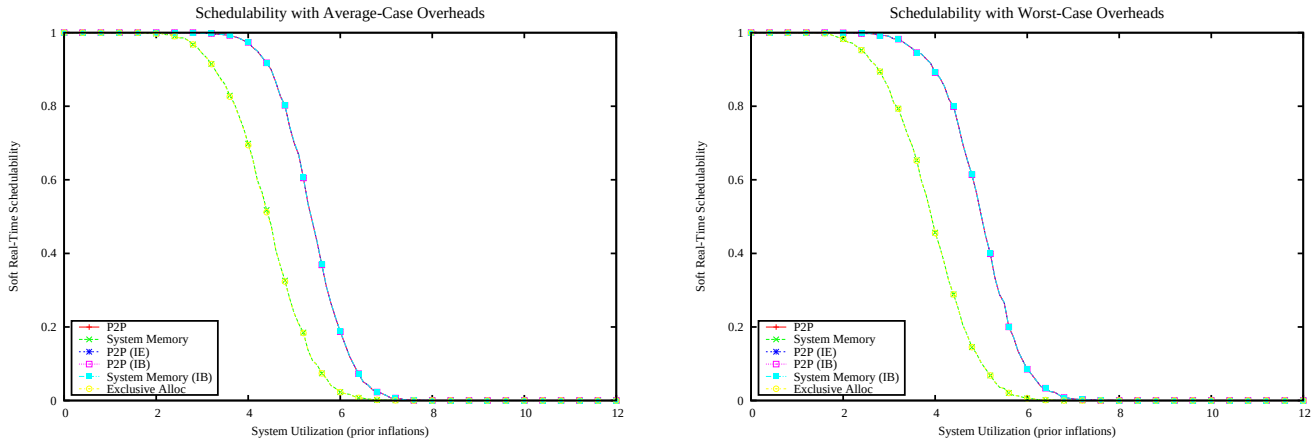

Figure 4838: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

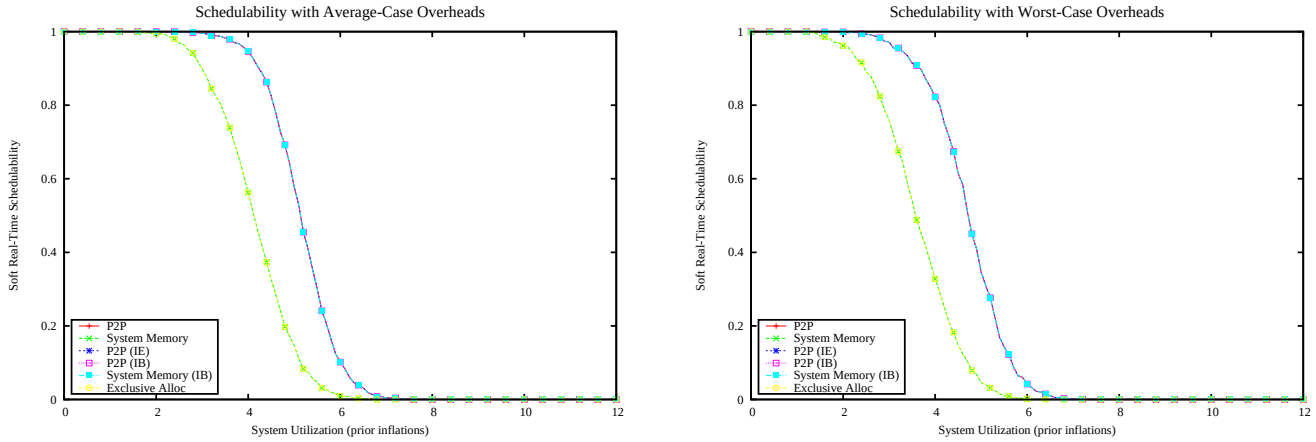

Figure 4839: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

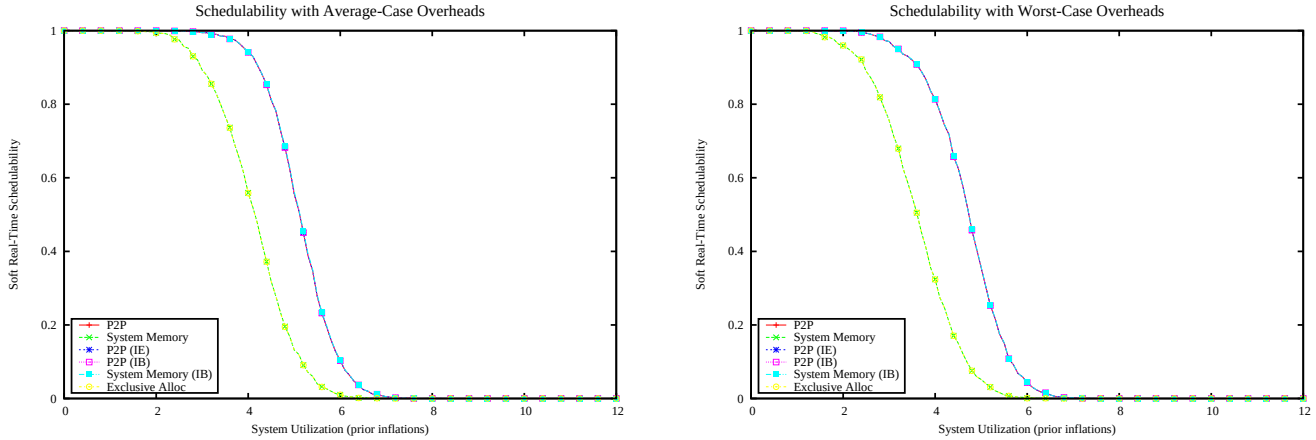

Figure 4840: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

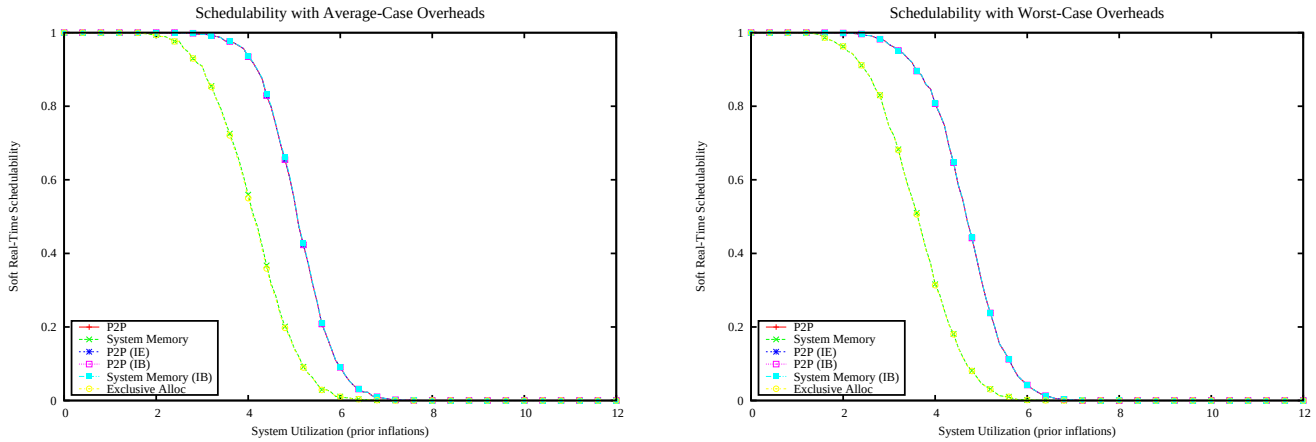

Figure 4841: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

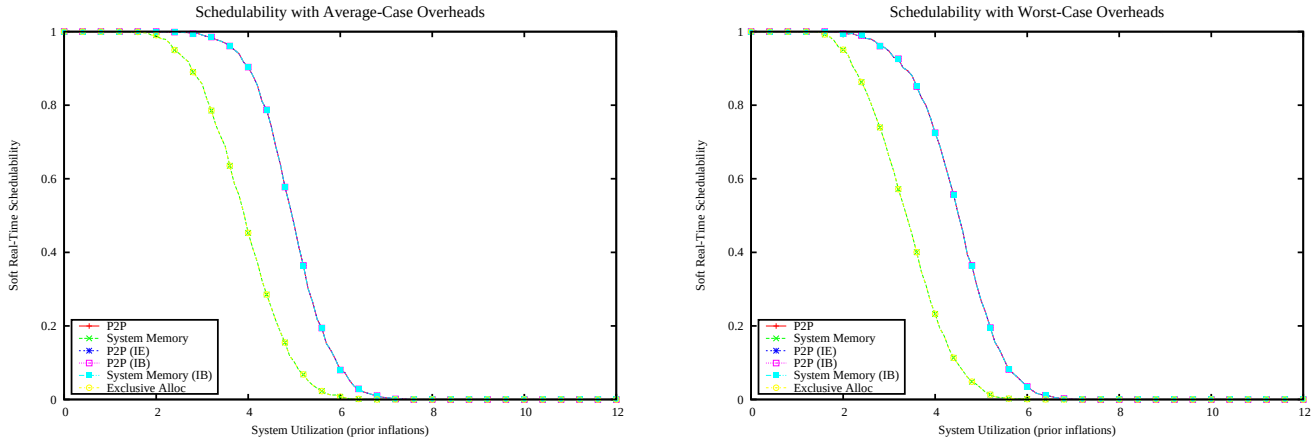

Figure 4842: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

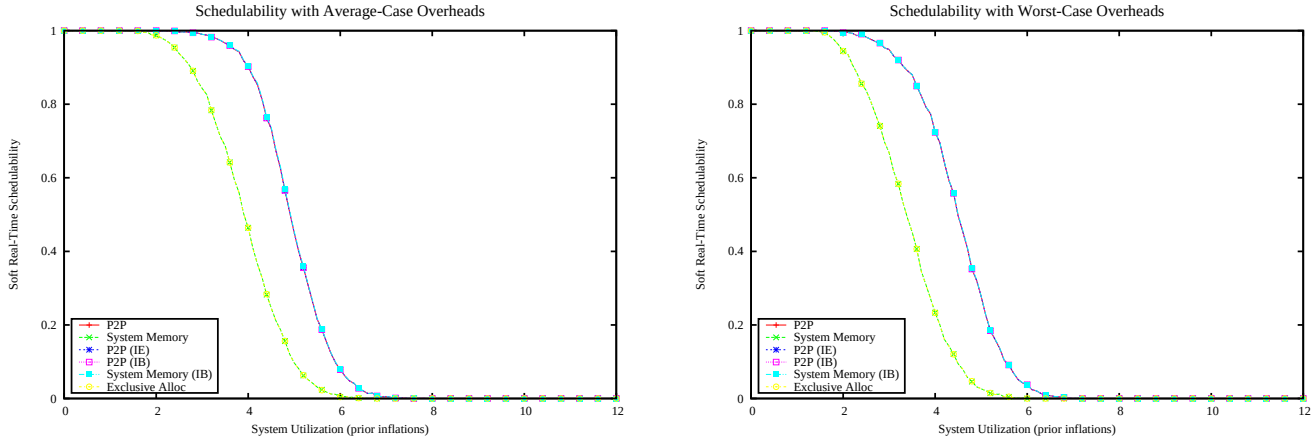

Figure 4843: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

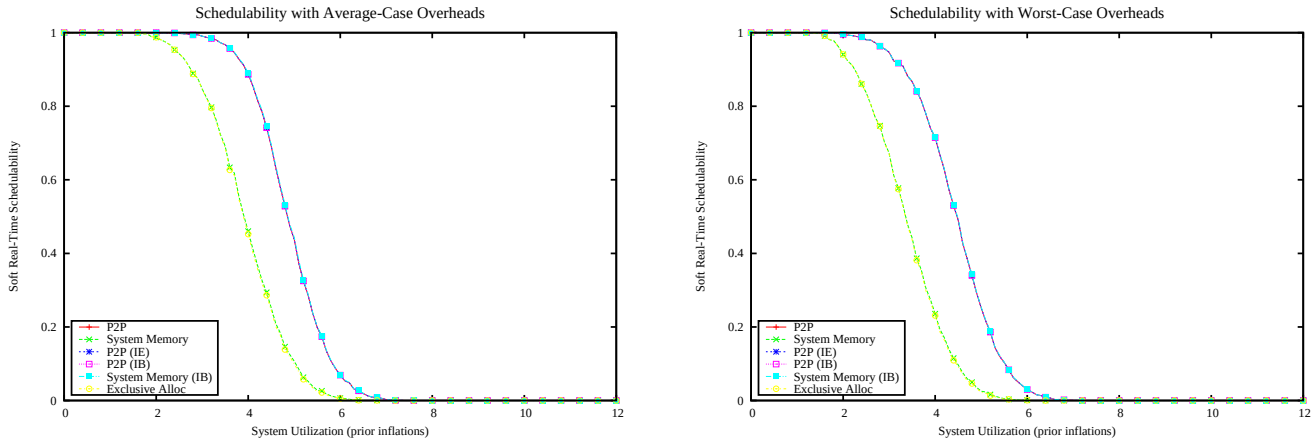

Figure 4844: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

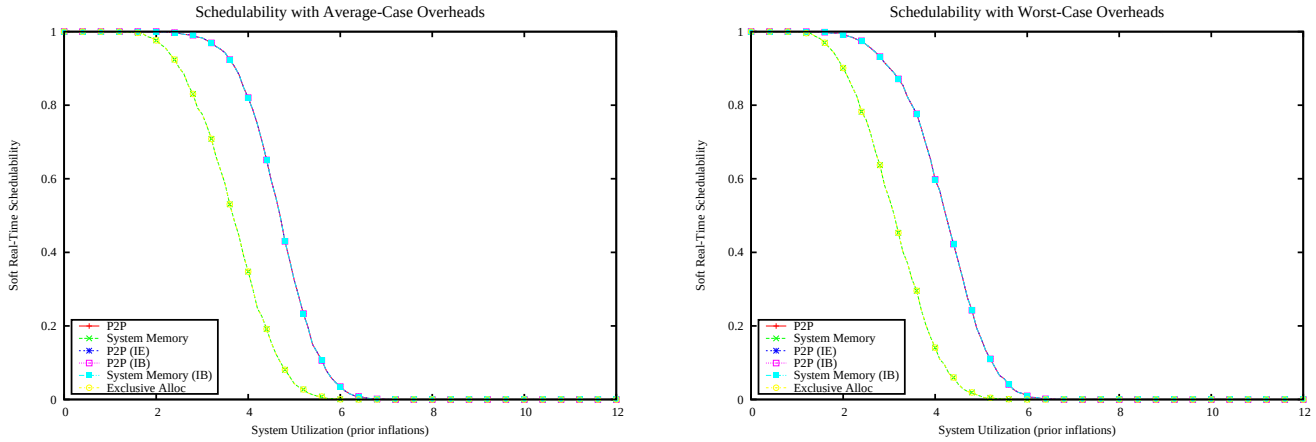

Figure 4845: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

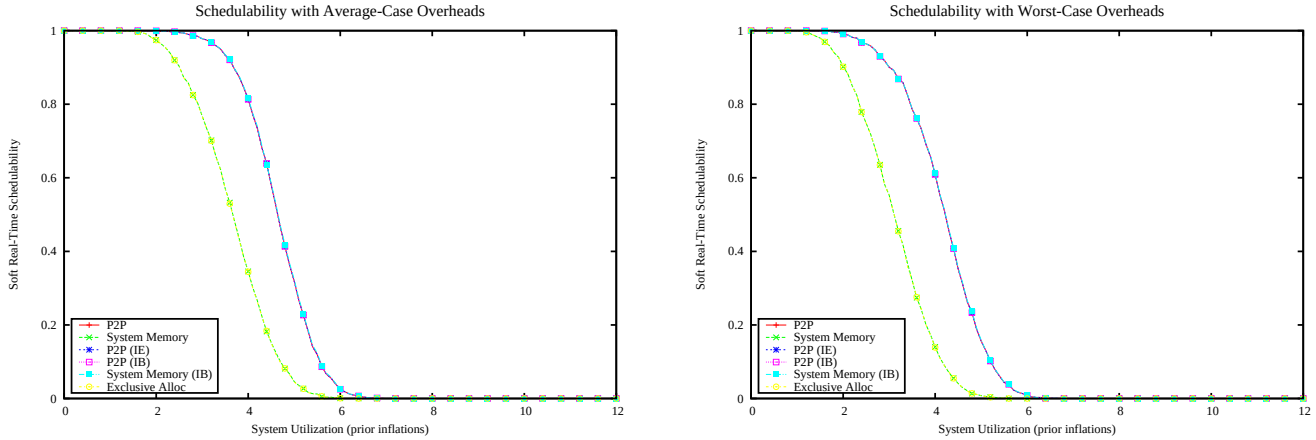

Figure 4846: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

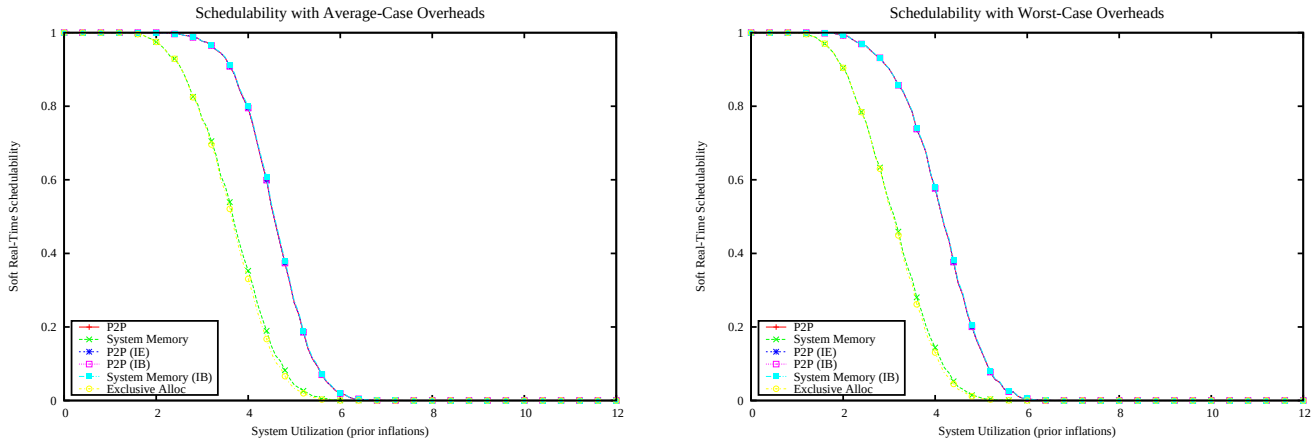

Figure 4847: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

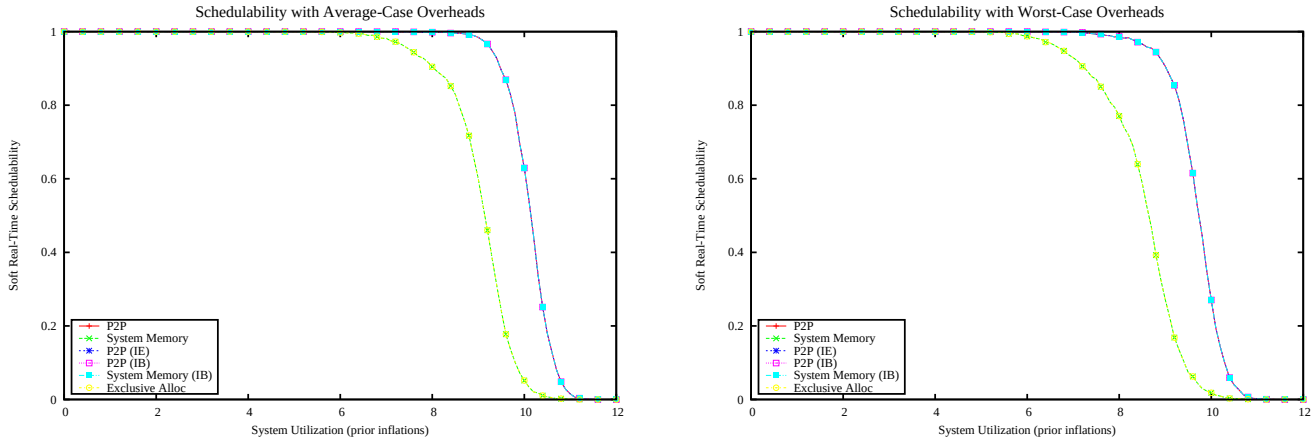

Figure 4848: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

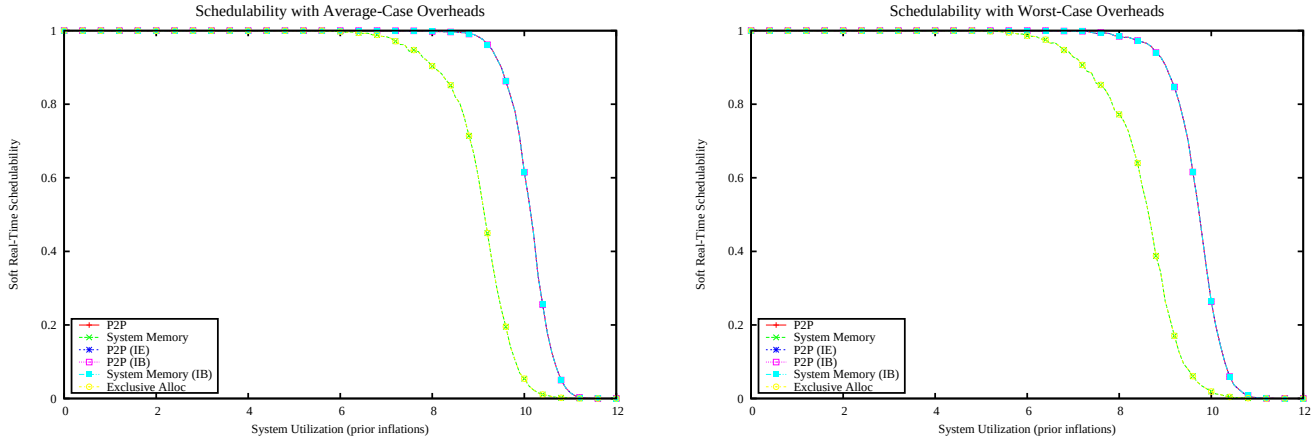

Figure 4849: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

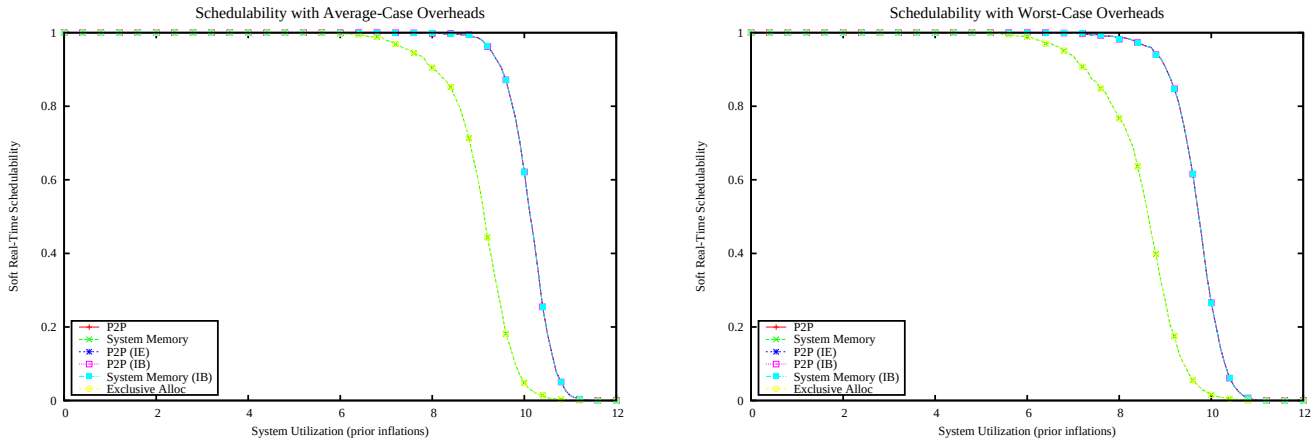

Figure 4850: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

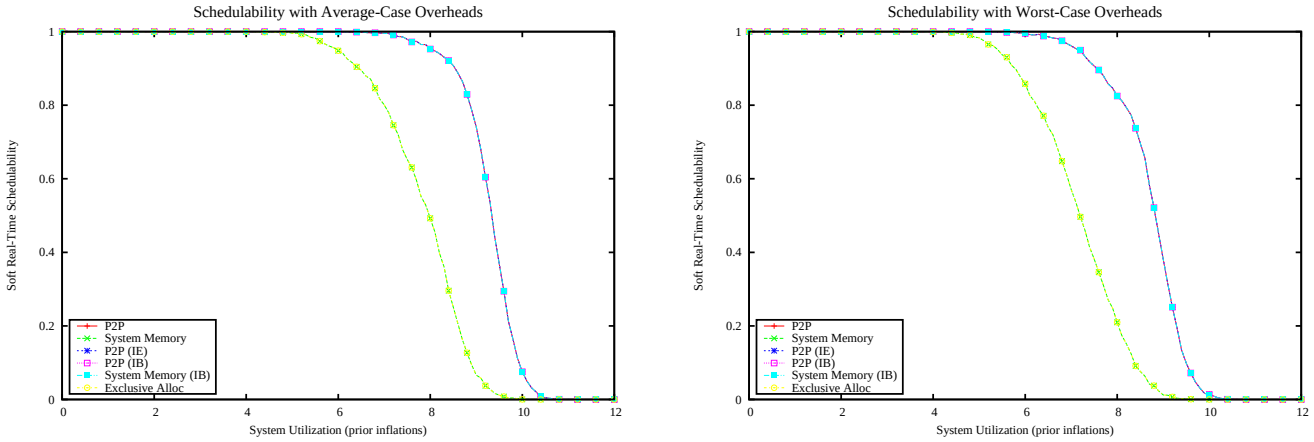

Figure 4851: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

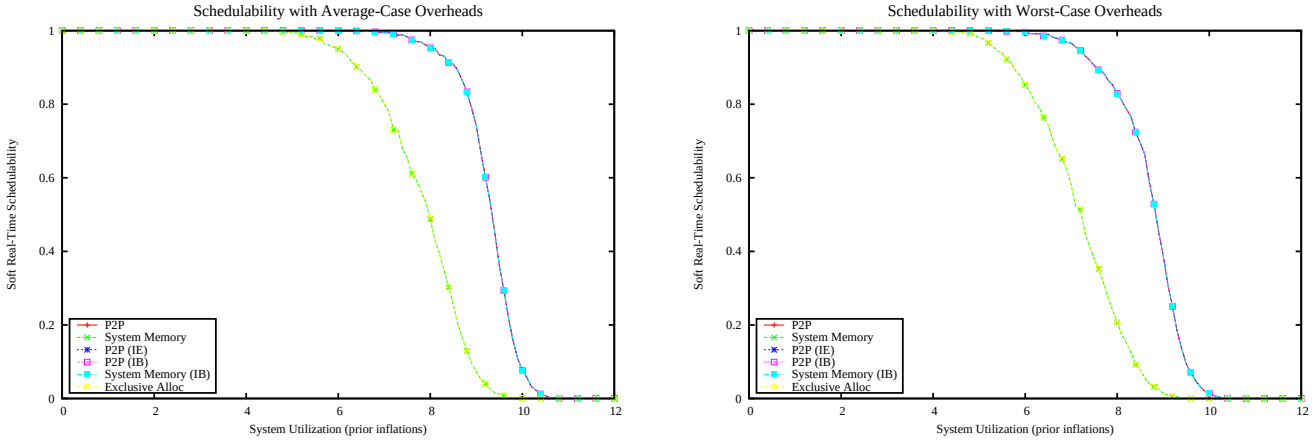

Figure 4852: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

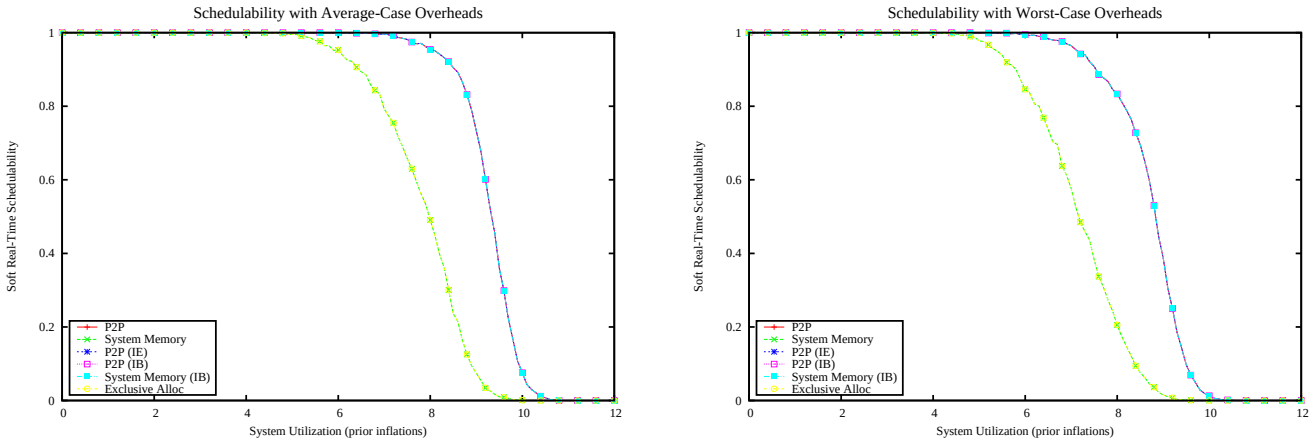

Figure 4853: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

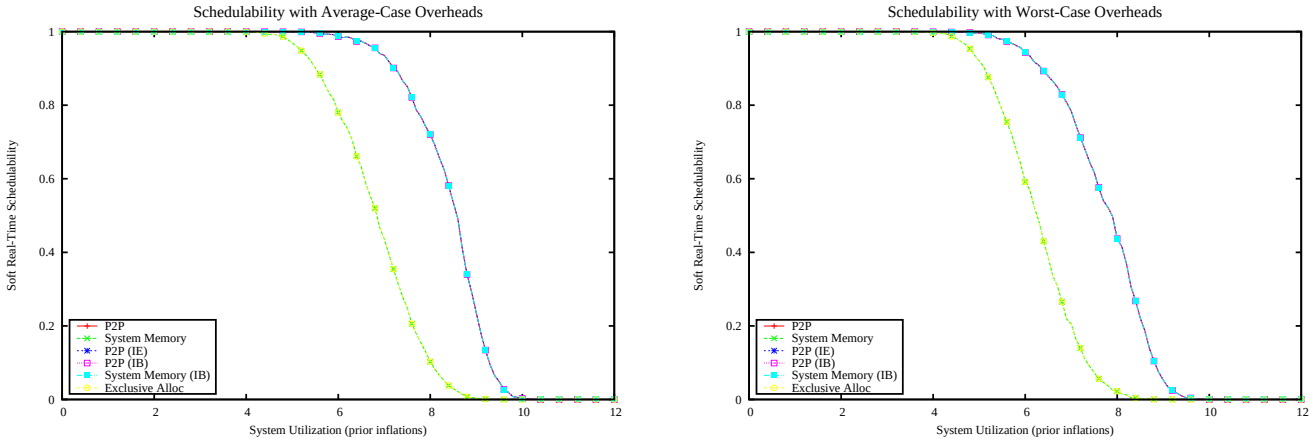

Figure 4854: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

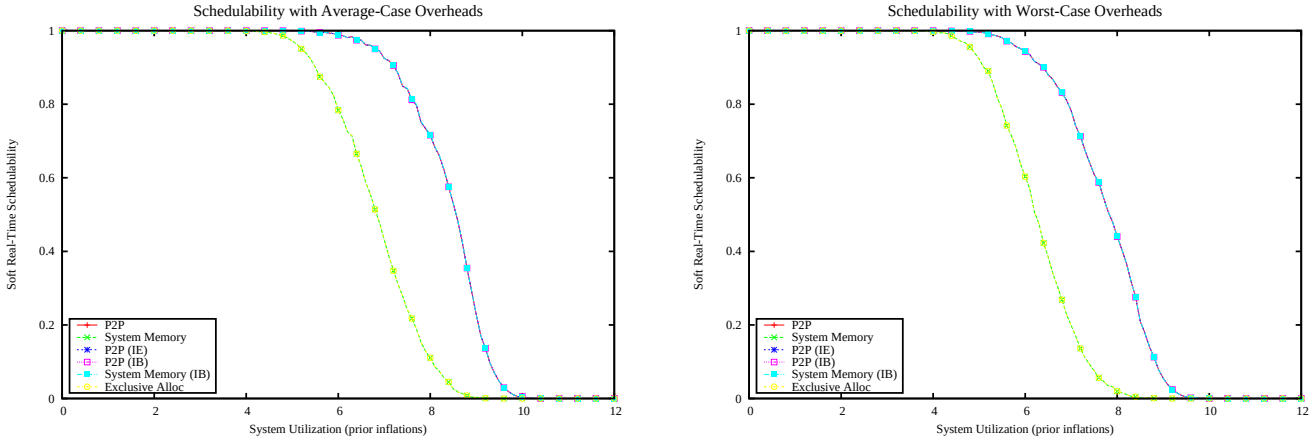

Figure 4855: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

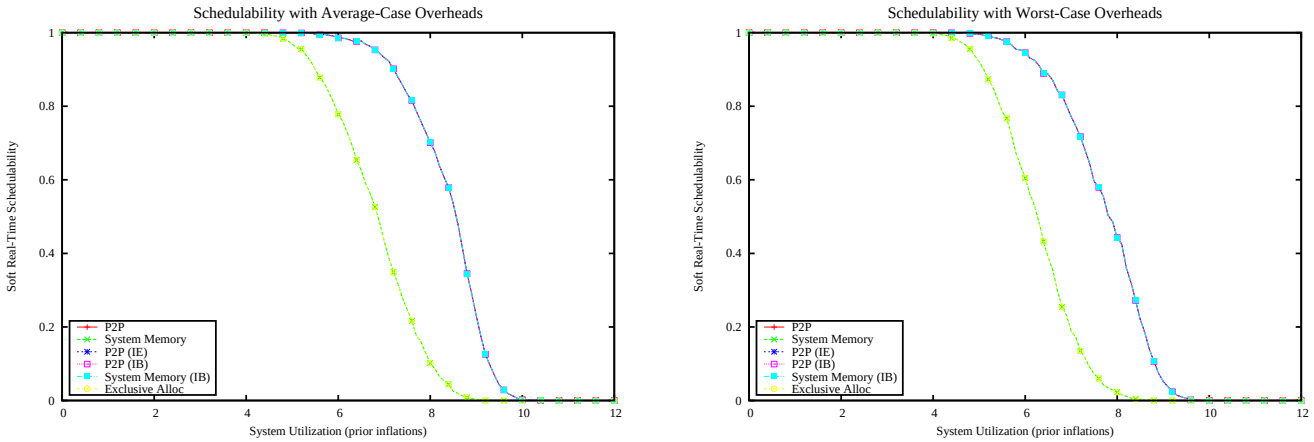

Figure 4856: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

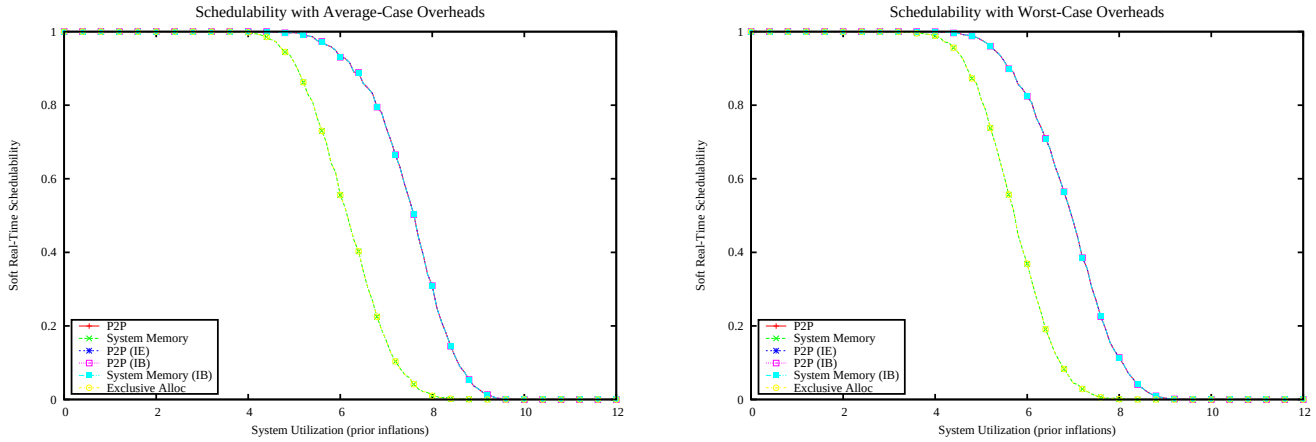

Figure 4857: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

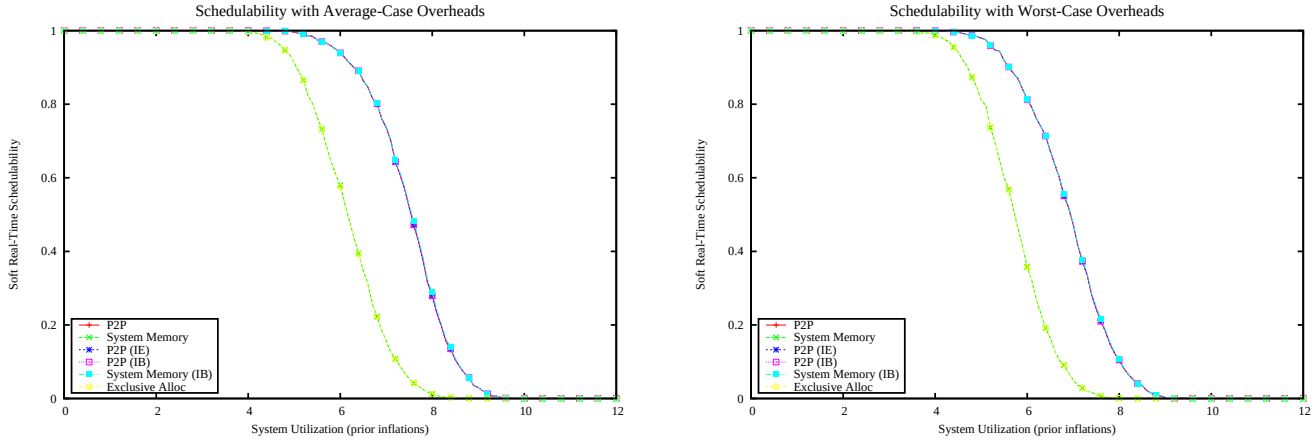

Figure 4858: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

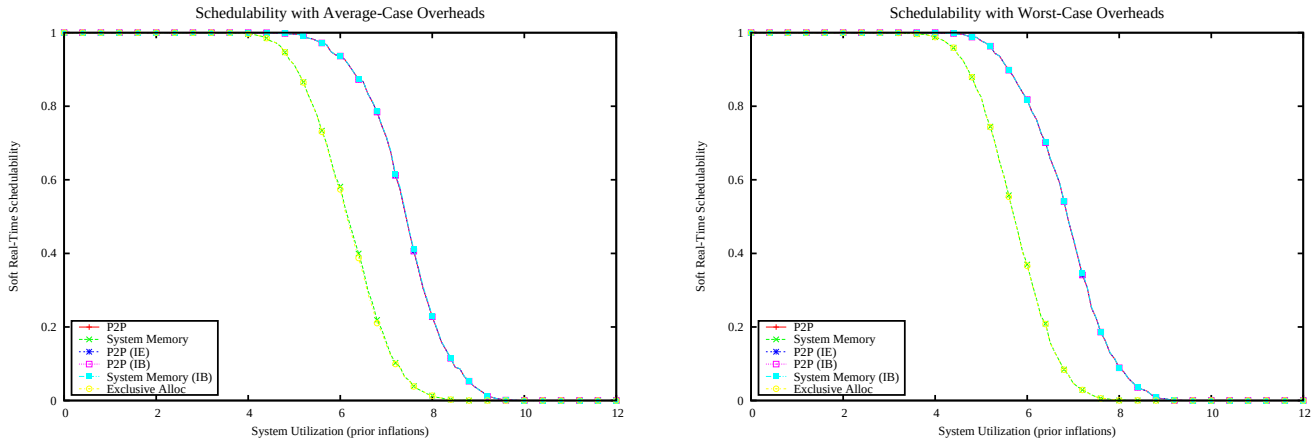

Figure 4859: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

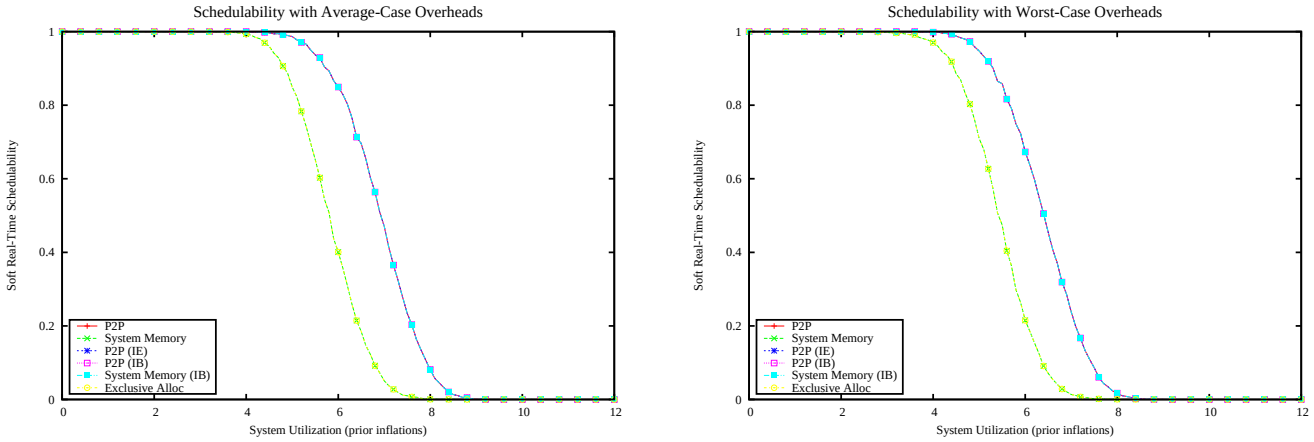

Figure 4860: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

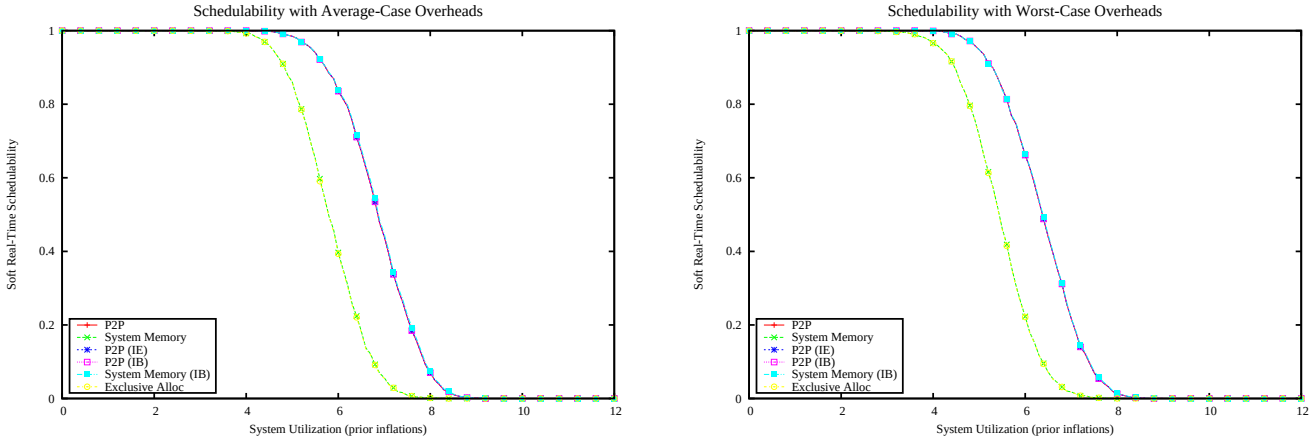

Figure 4861: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

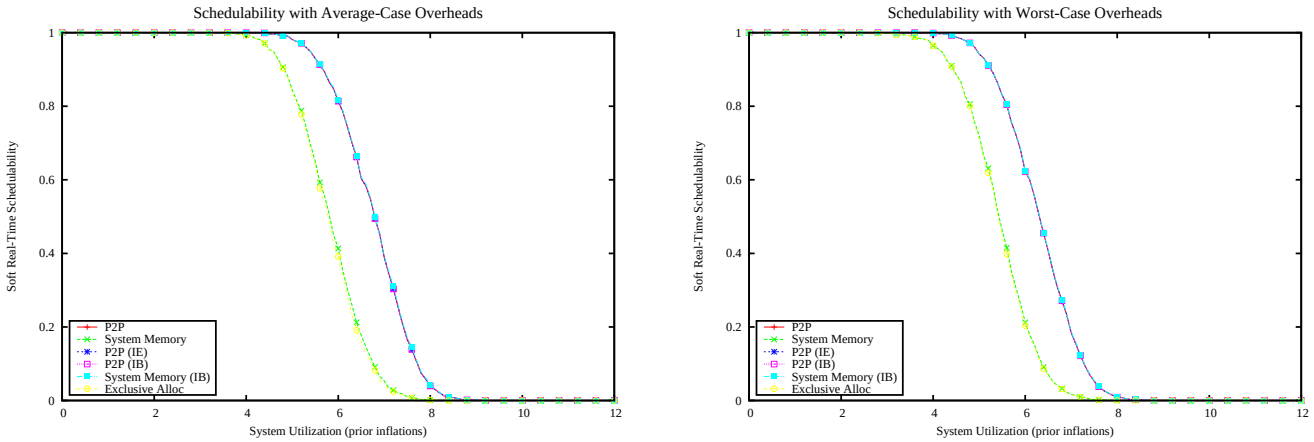

Figure 4862: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

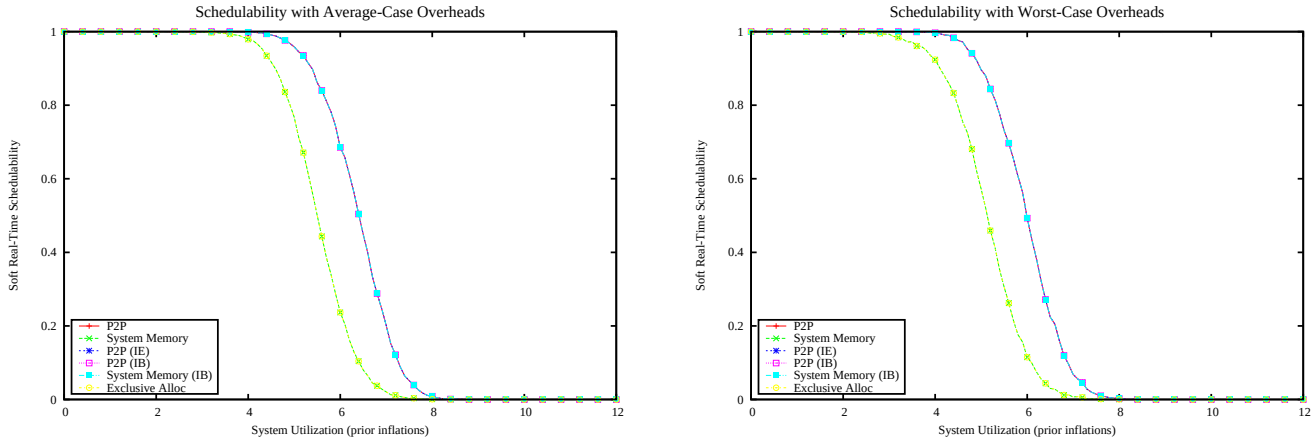

Figure 4863: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

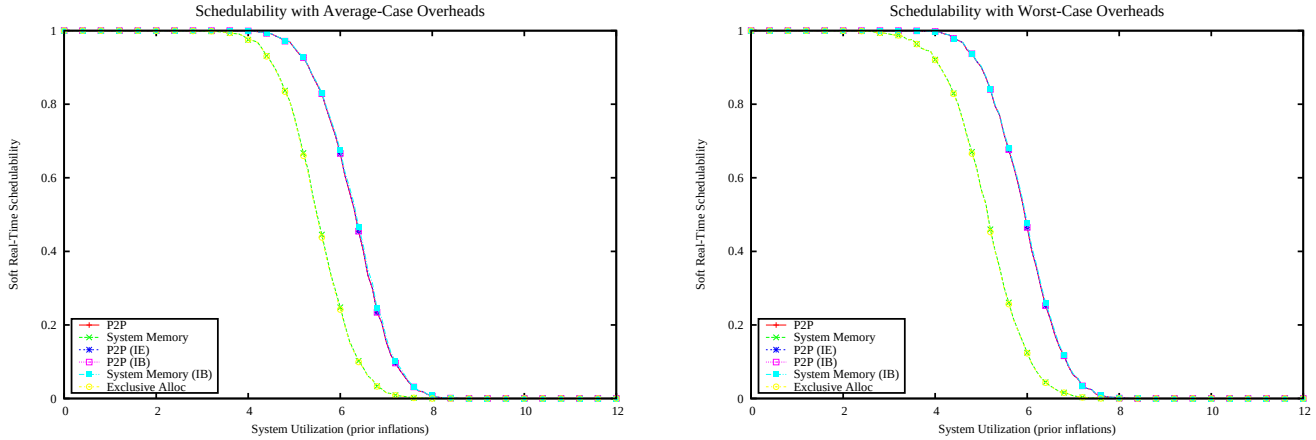

Figure 4864: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

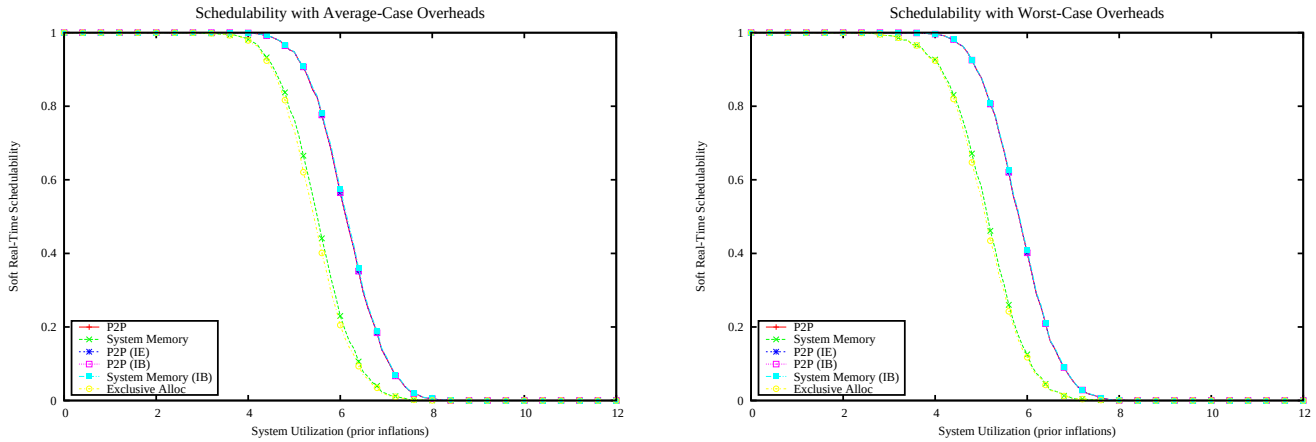

Figure 4865: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

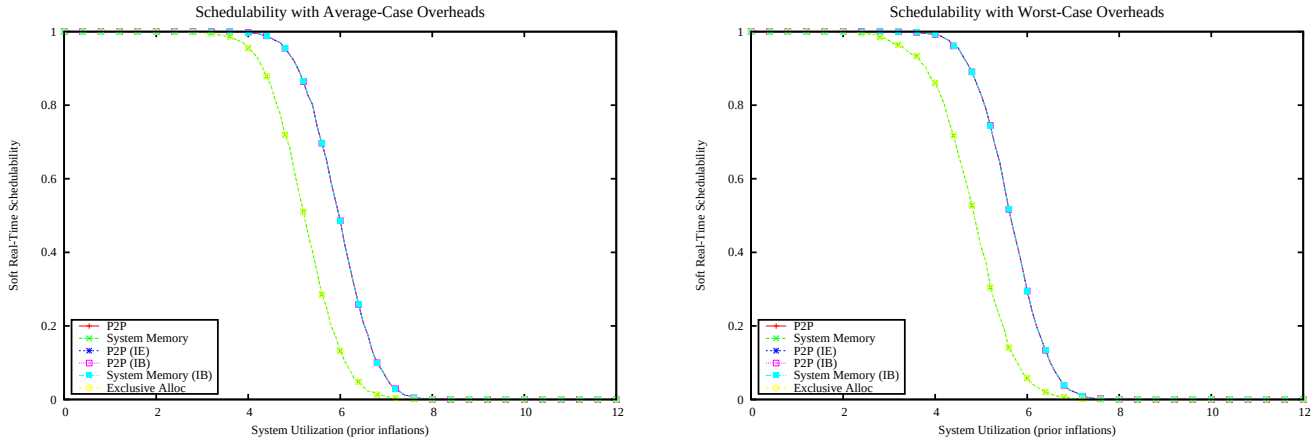

Figure 4866: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

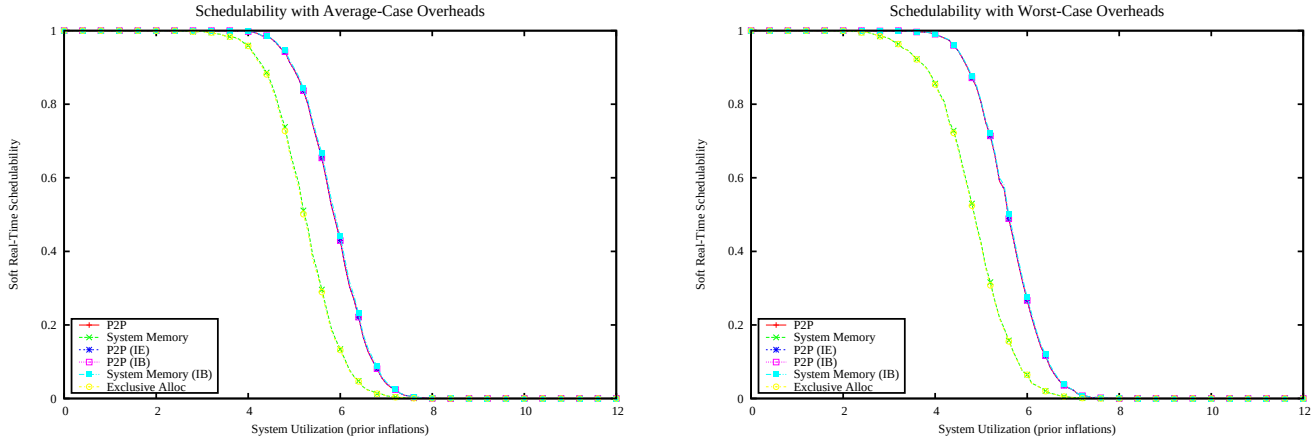

Figure 4867: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

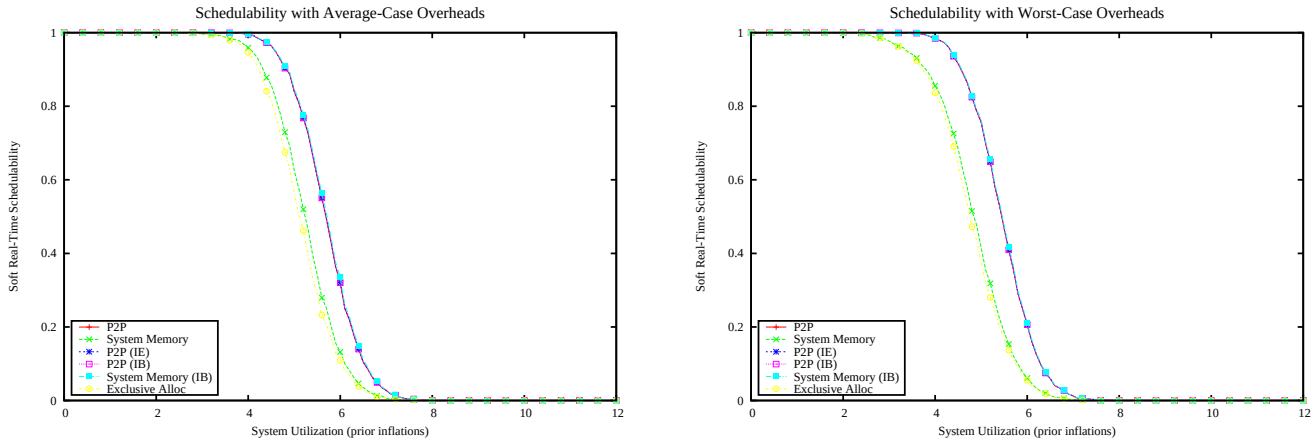

Figure 4868: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

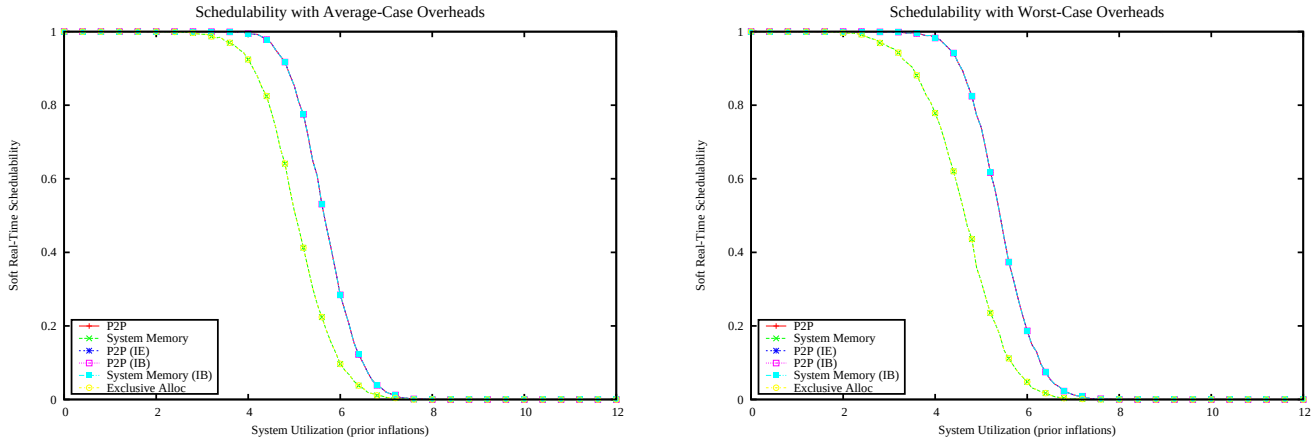

Figure 4869: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

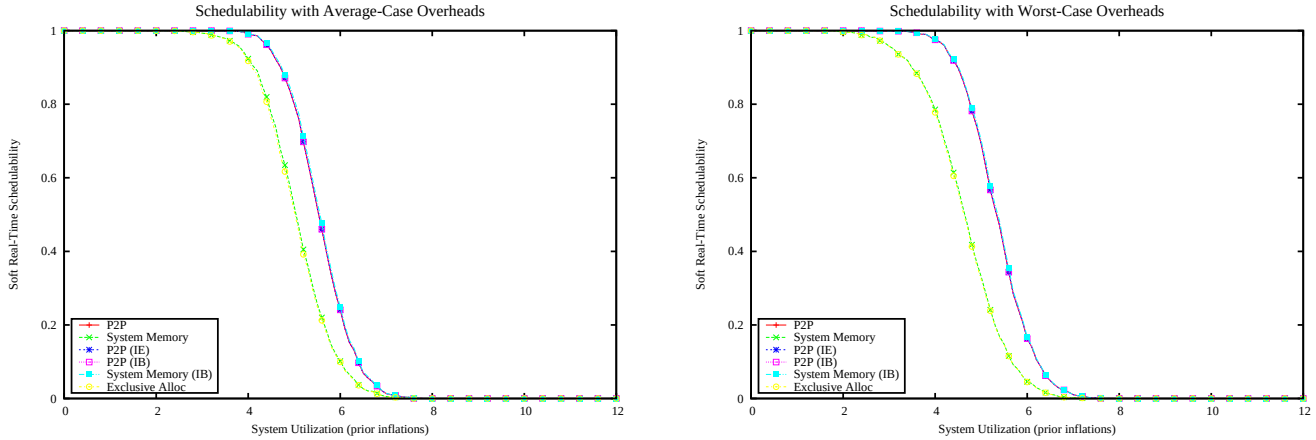

Figure 4870: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

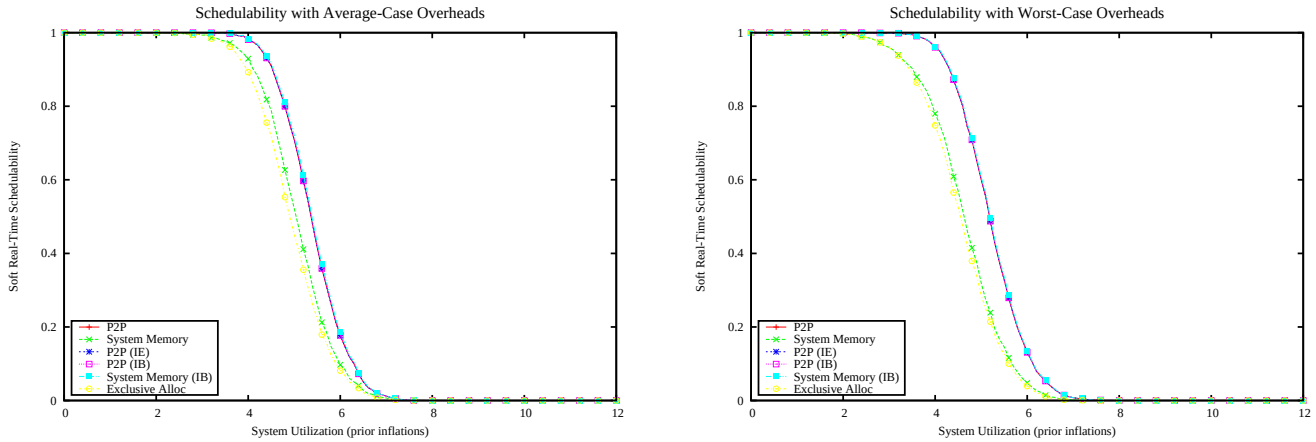

Figure 4871: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

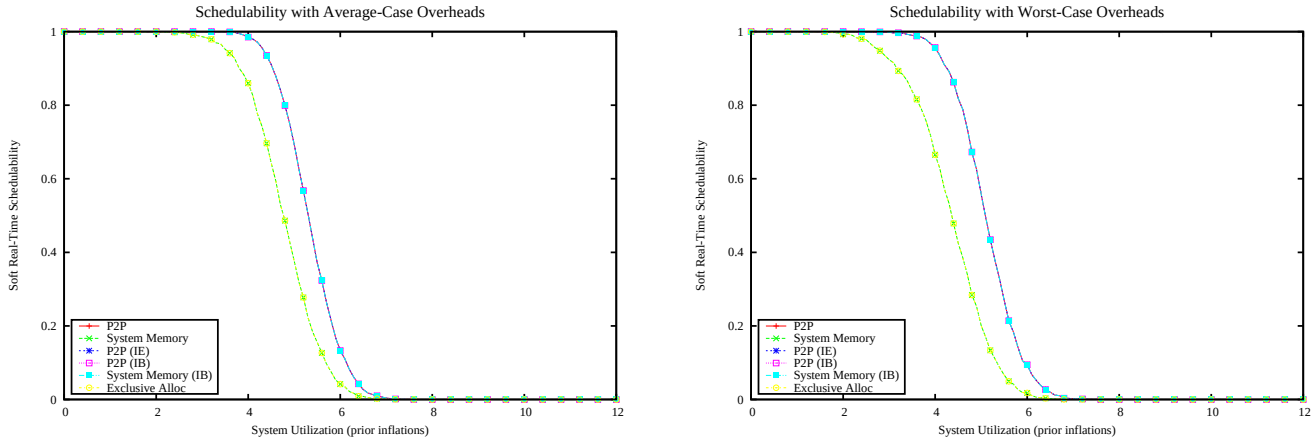

Figure 4872: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

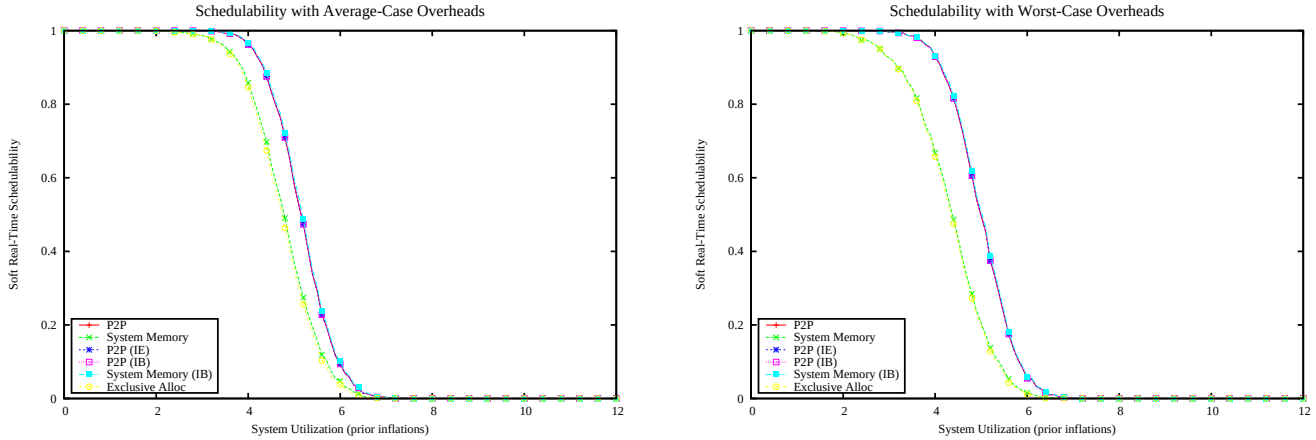

Figure 4873: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

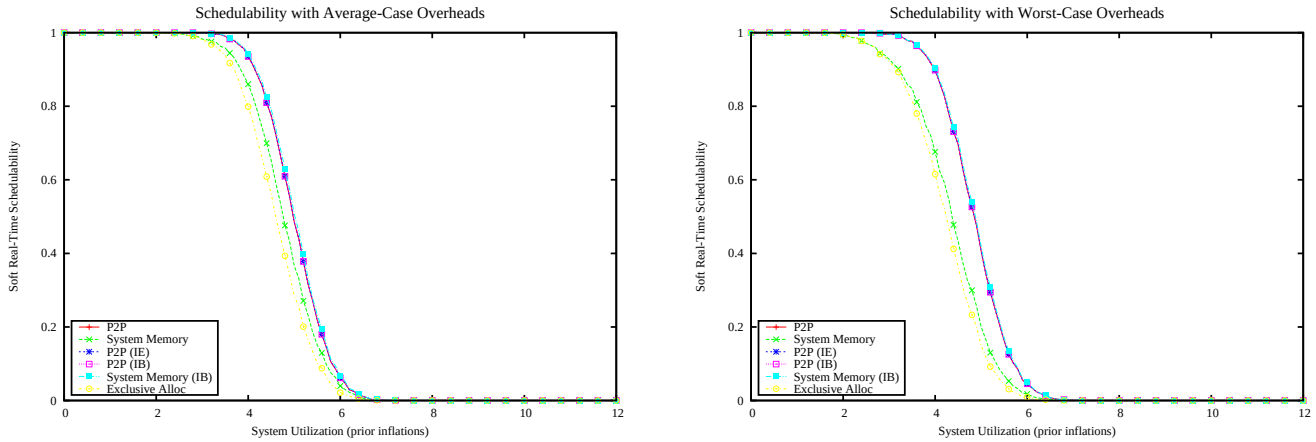

Figure 4874: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

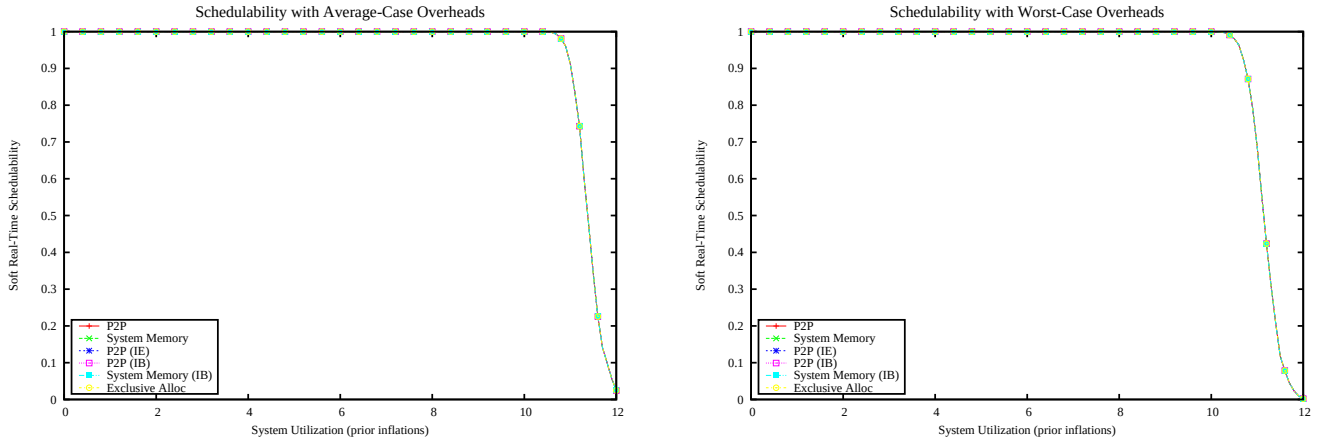

Figure 4875: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

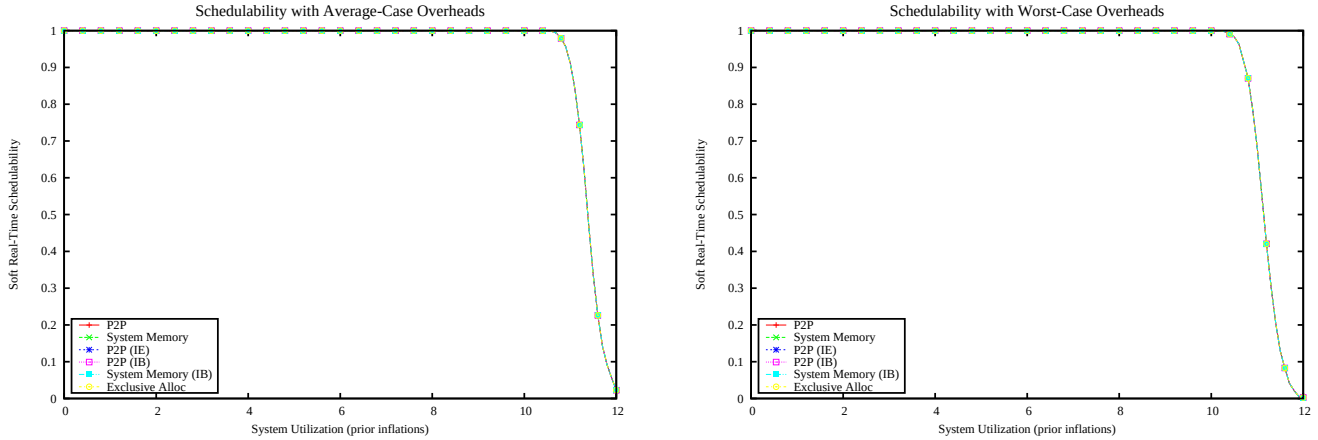

Figure 4876: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

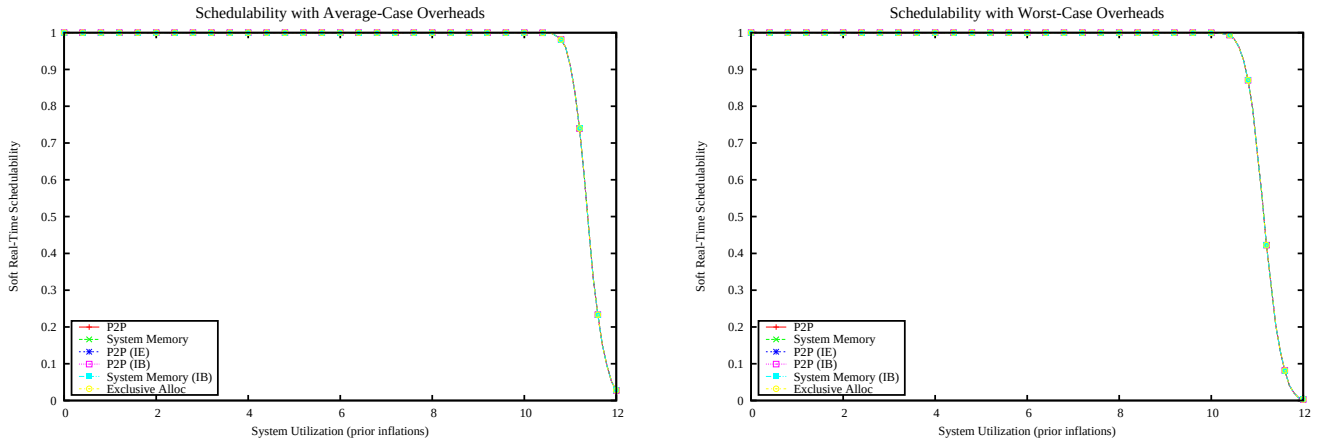

Figure 4877: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

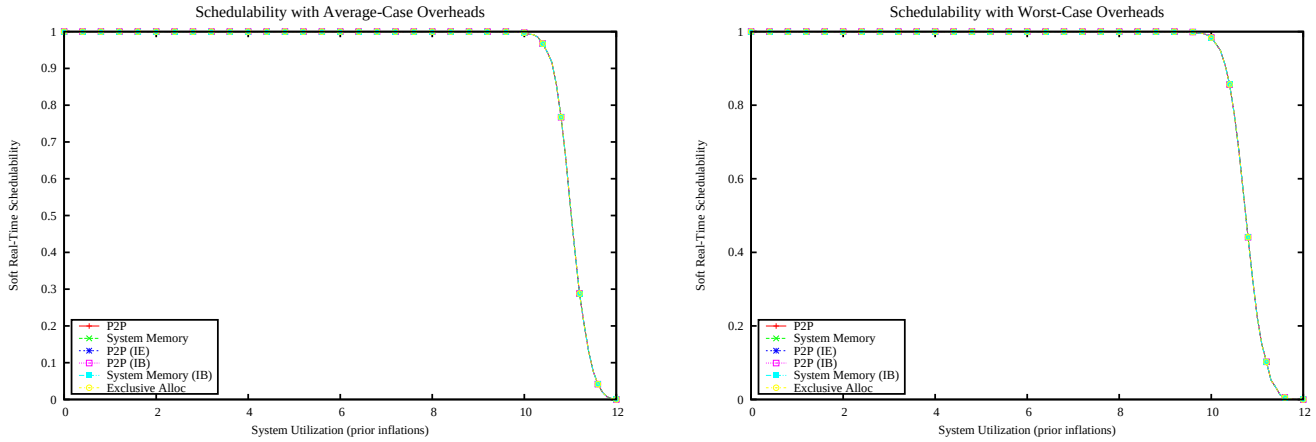

Figure 4878: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

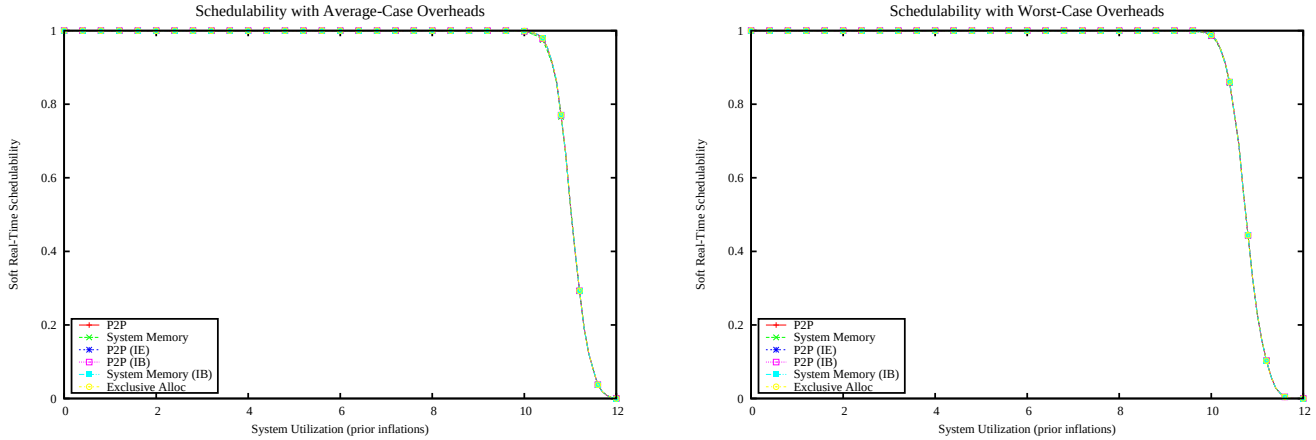

Figure 4879: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

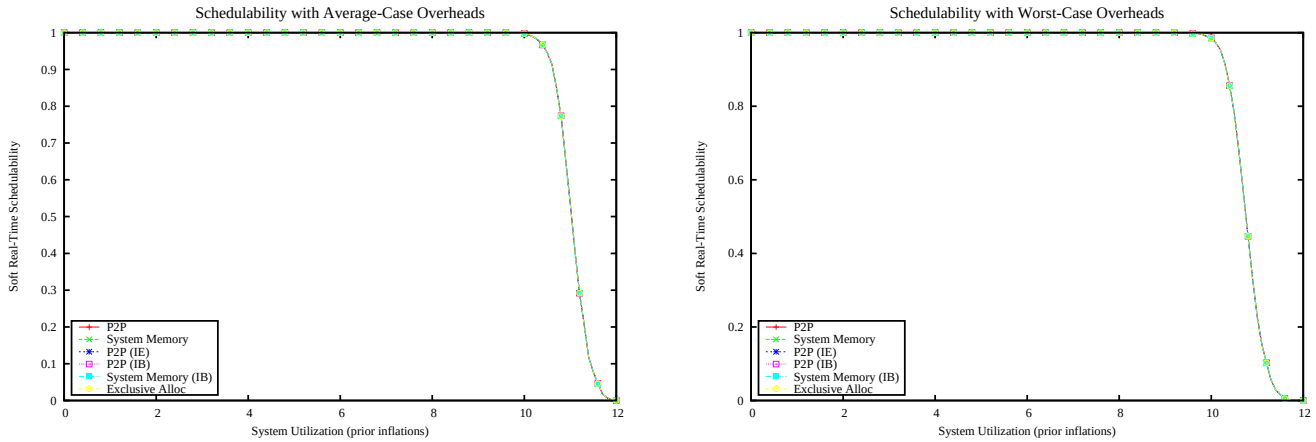

Figure 4880: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

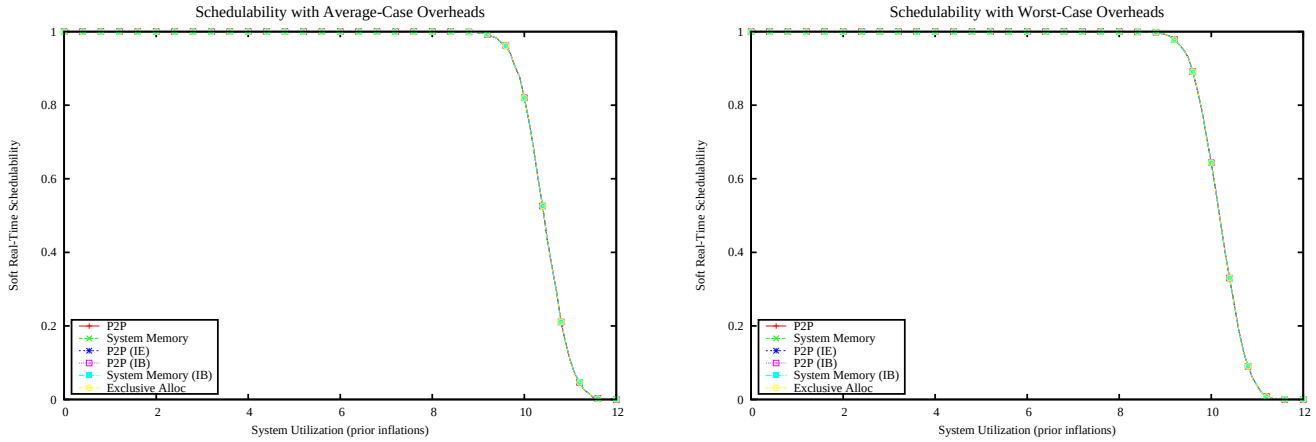

Figure 4881: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

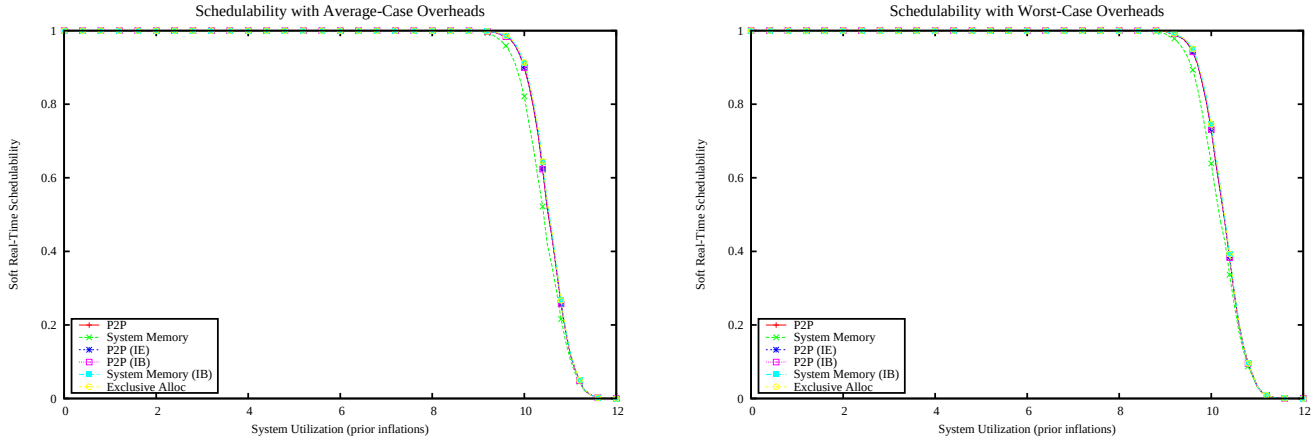

Figure 4882: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

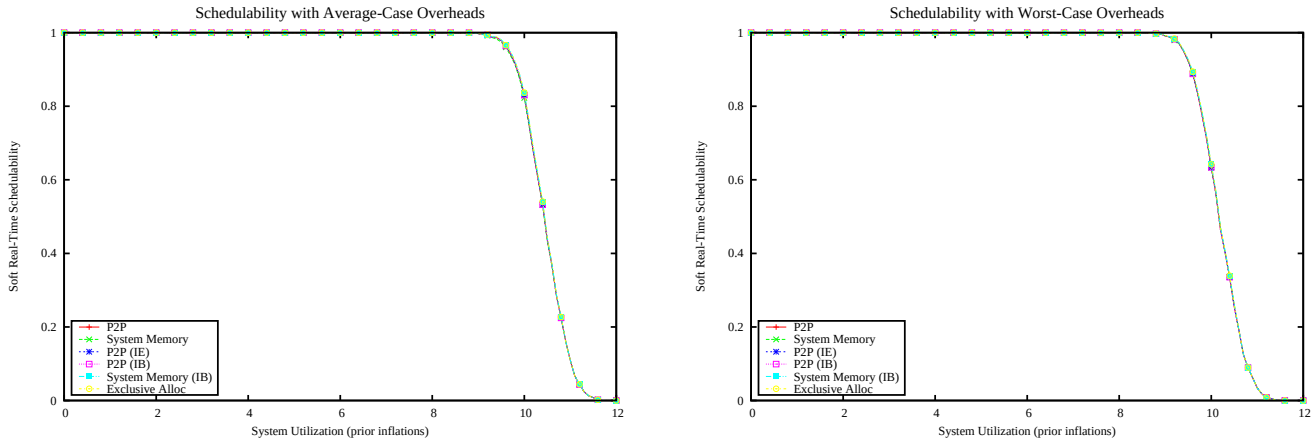

Figure 4883: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

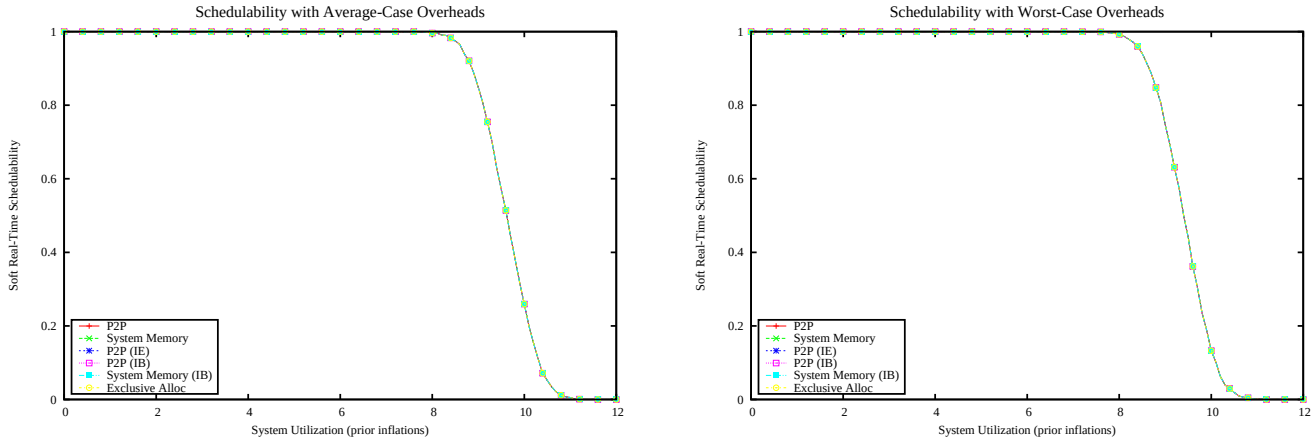

Figure 4884: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

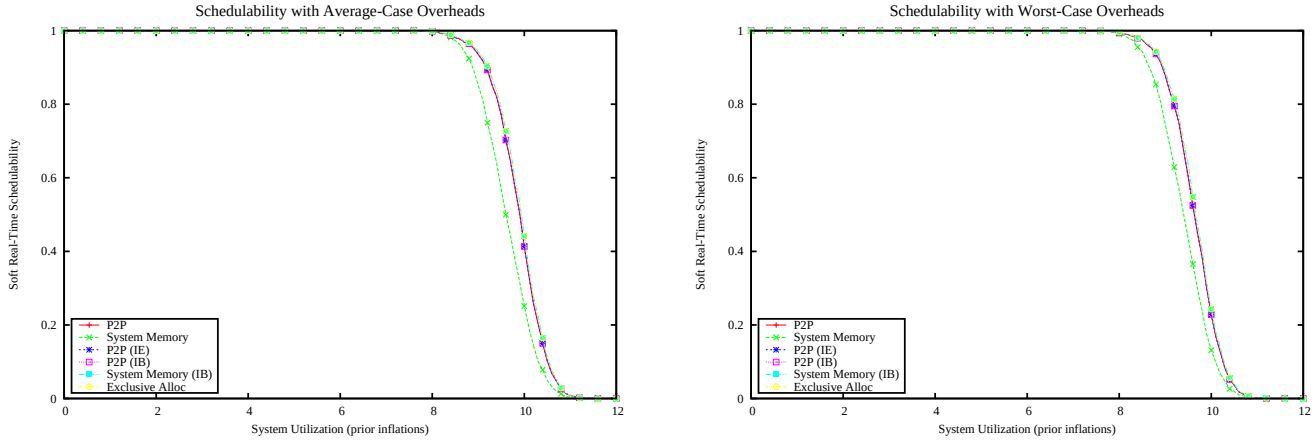

Figure 4885: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

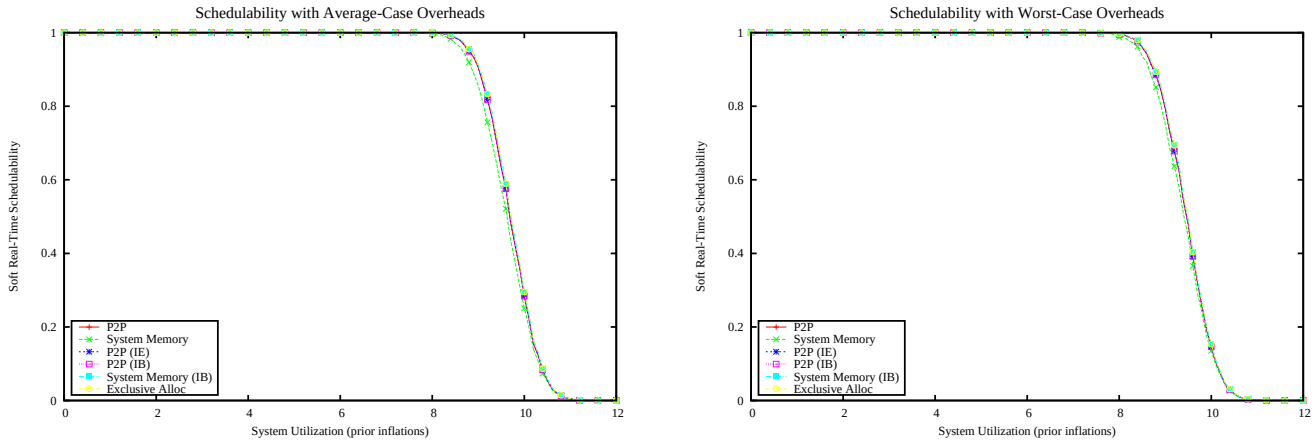

Figure 4886: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

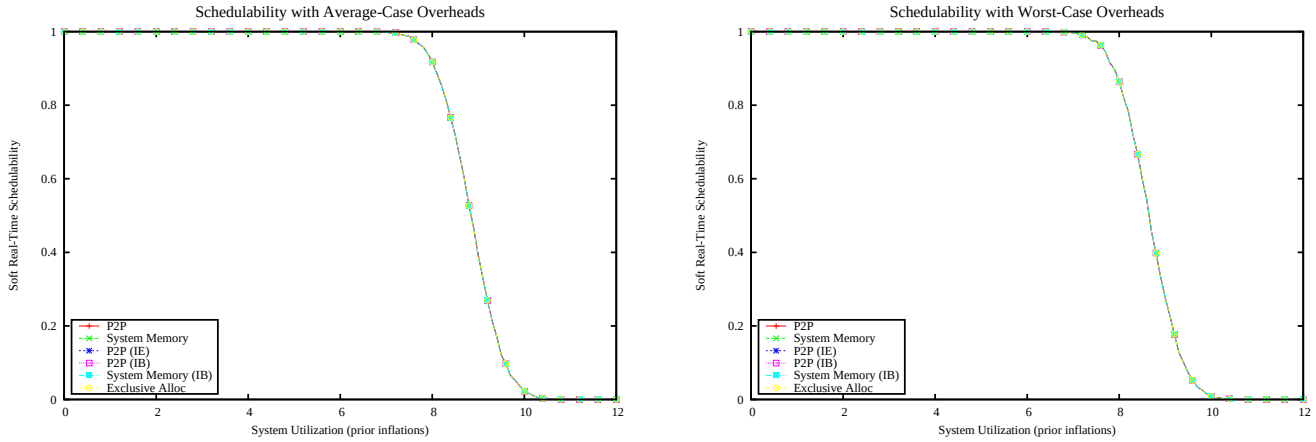

Figure 4887: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

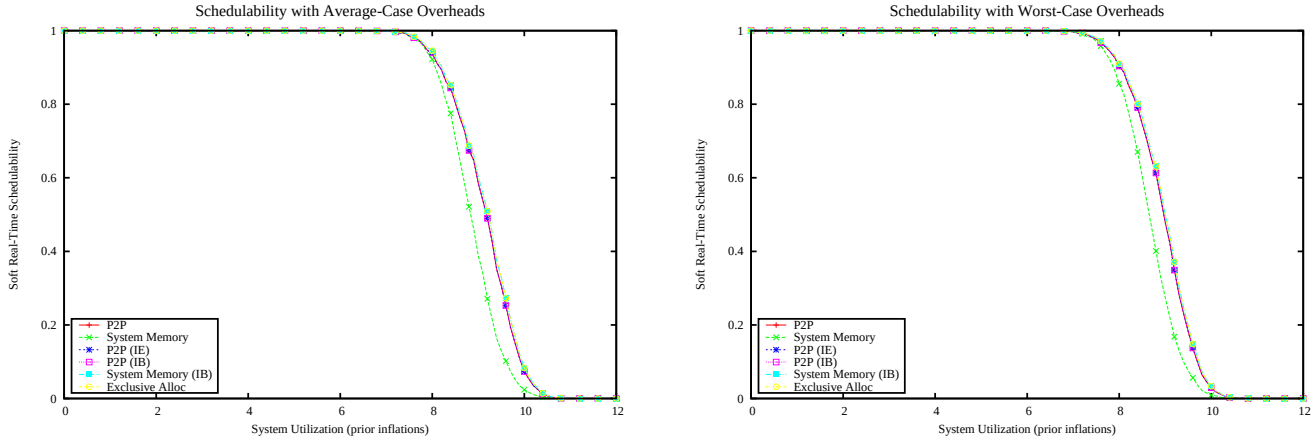

Figure 4888: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

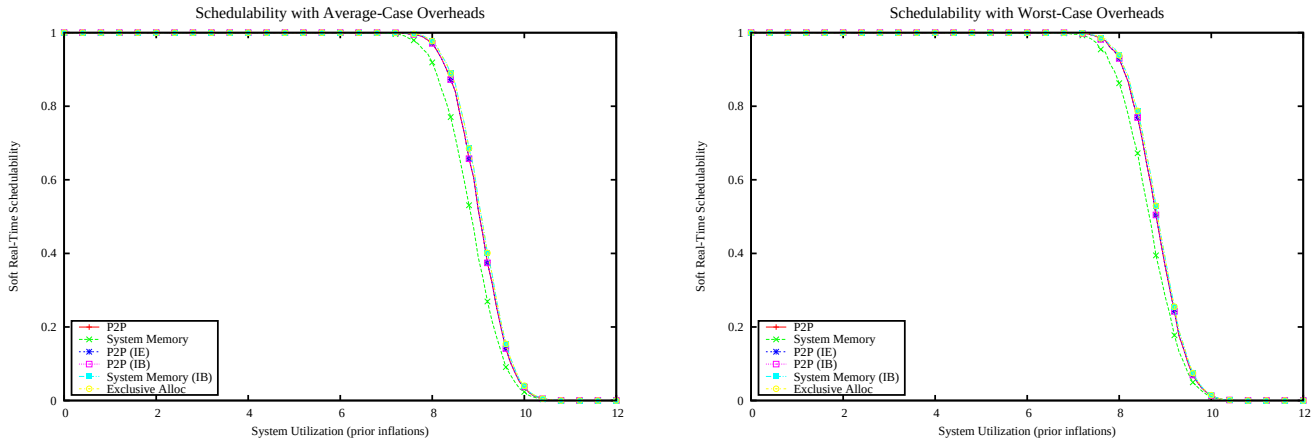

Figure 4889: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

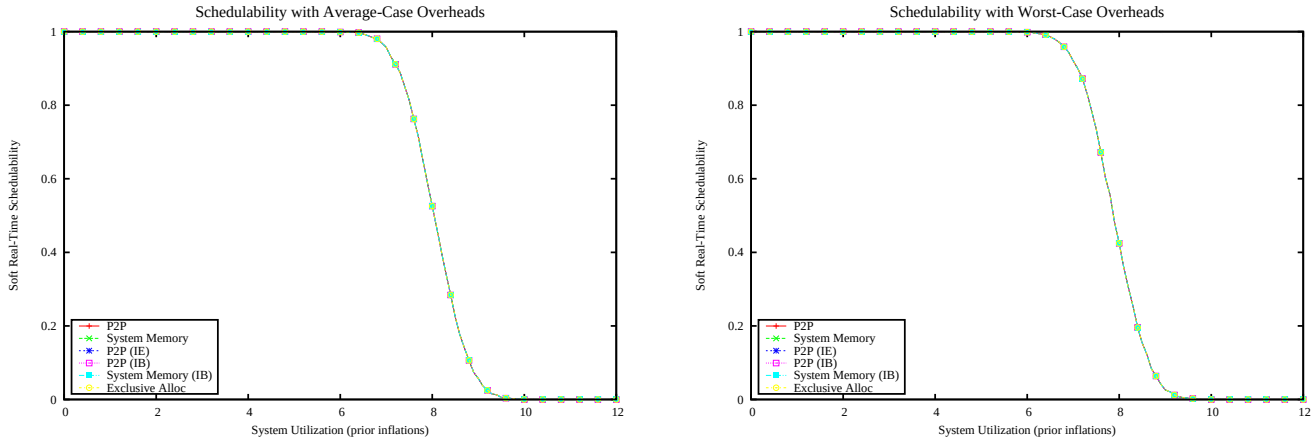

Figure 4890: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

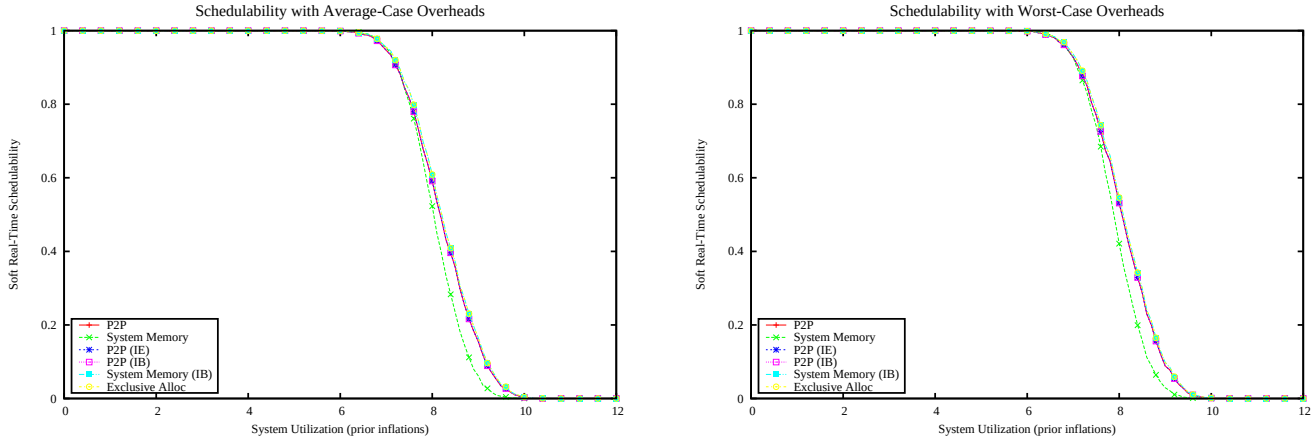

Figure 4891: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

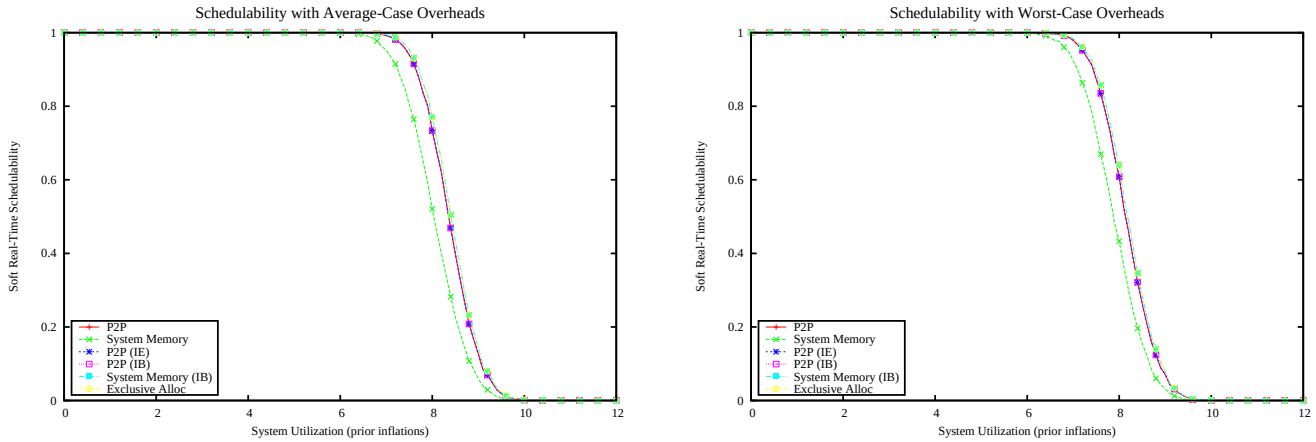

Figure 4892: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

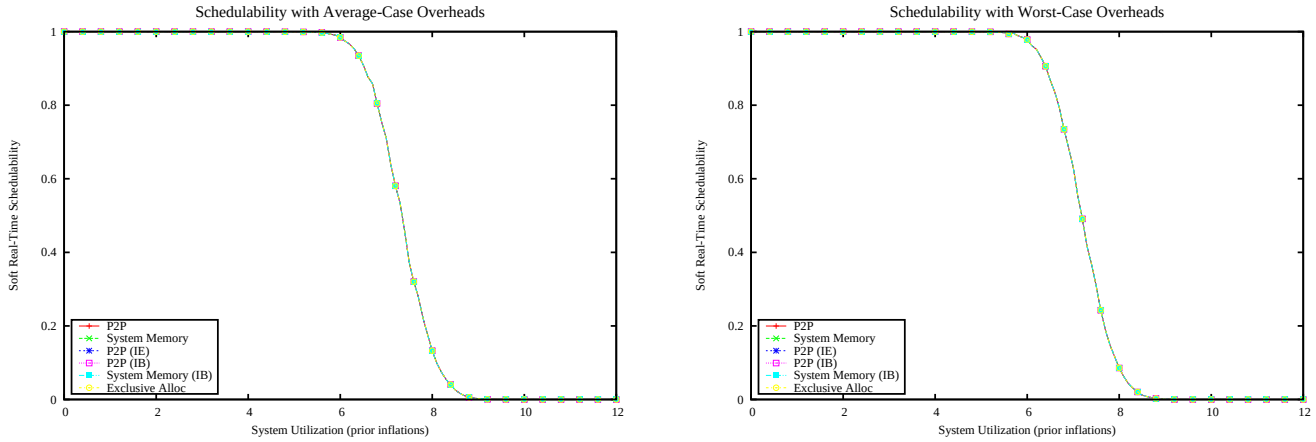

Figure 4893: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

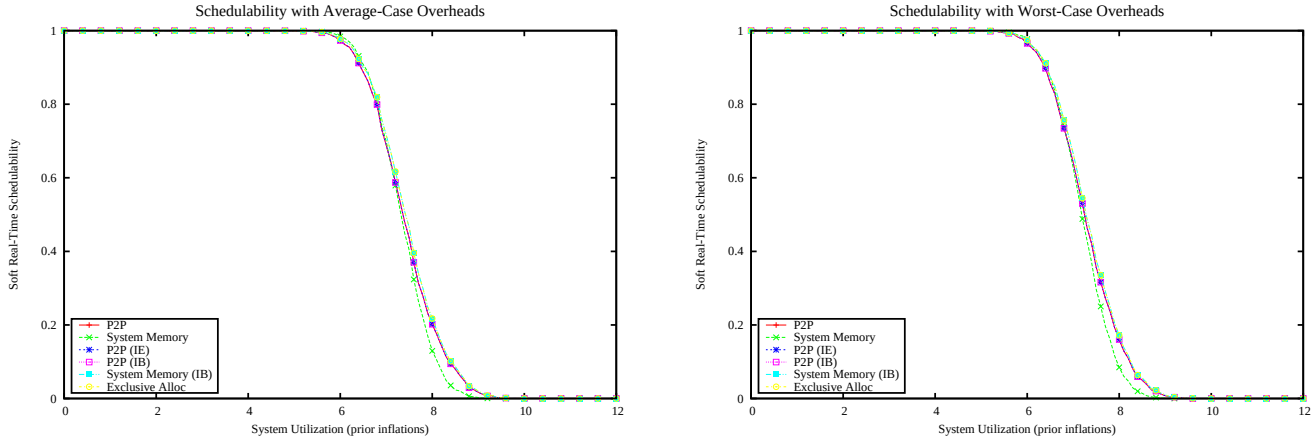

Figure 4894: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

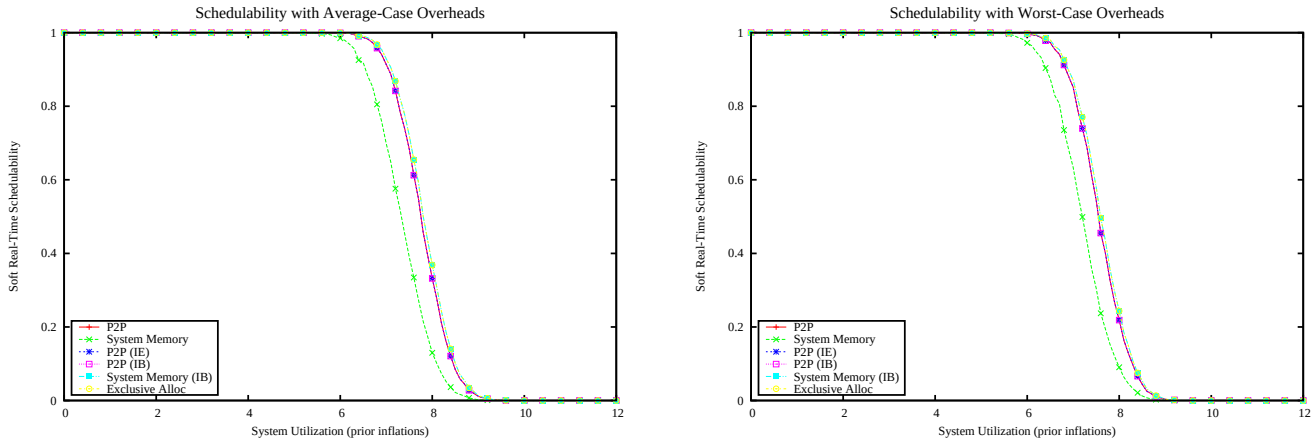

Figure 4895: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

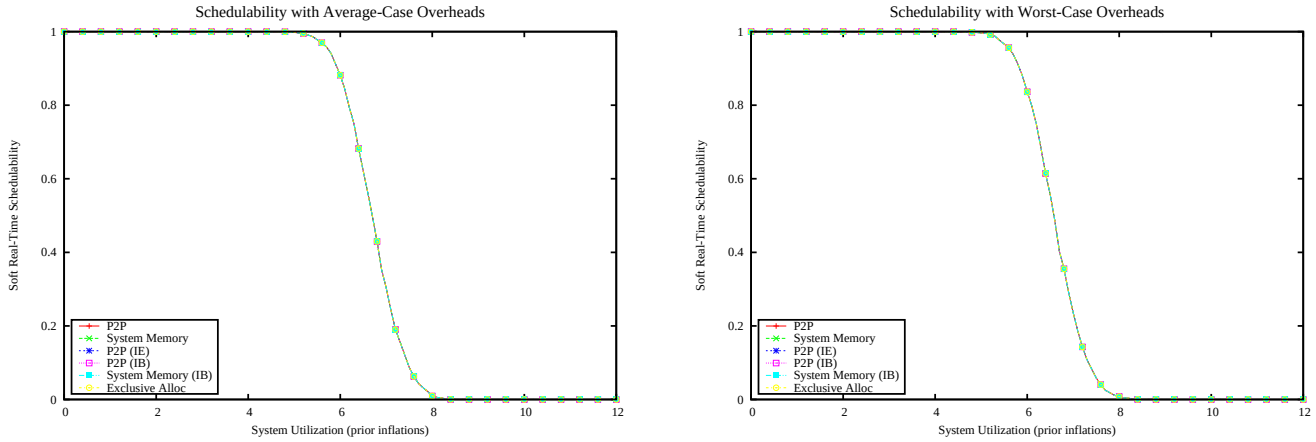

Figure 4896: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

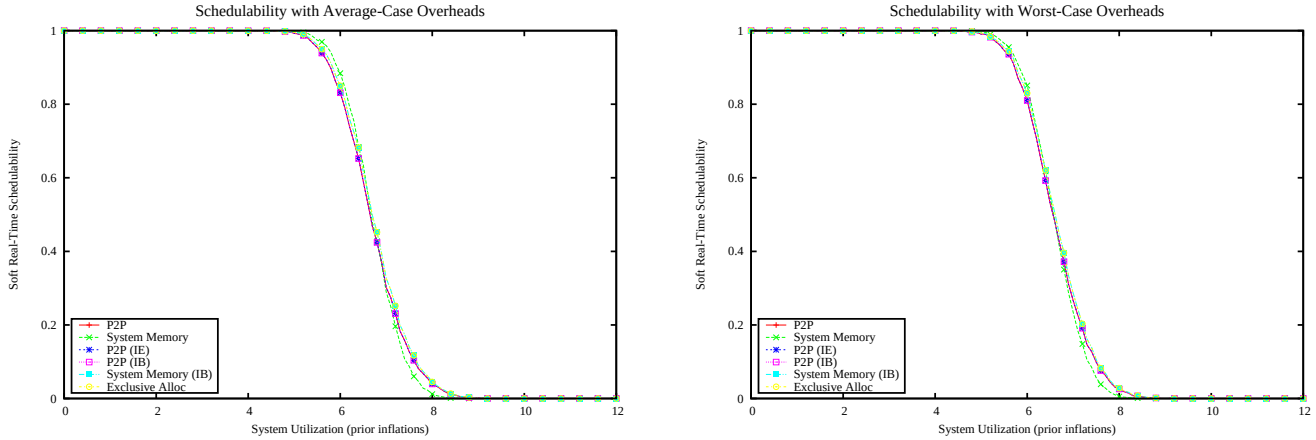

Figure 4897: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

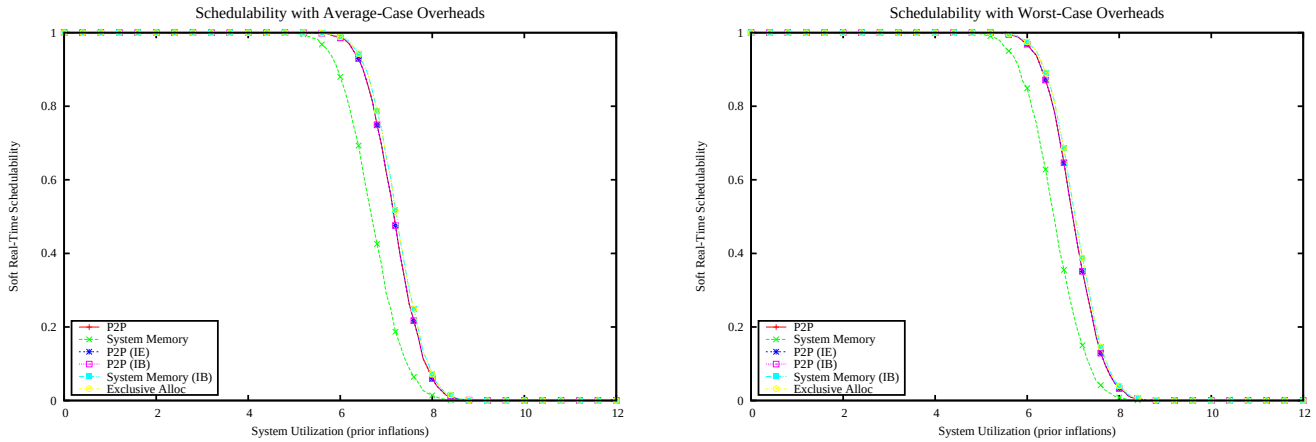

Figure 4898: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

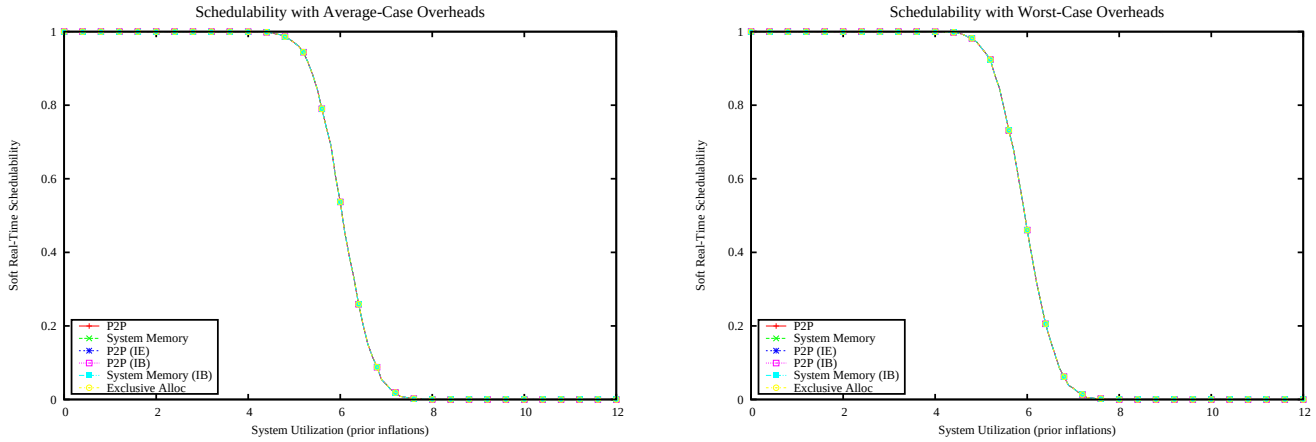

Figure 4899: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

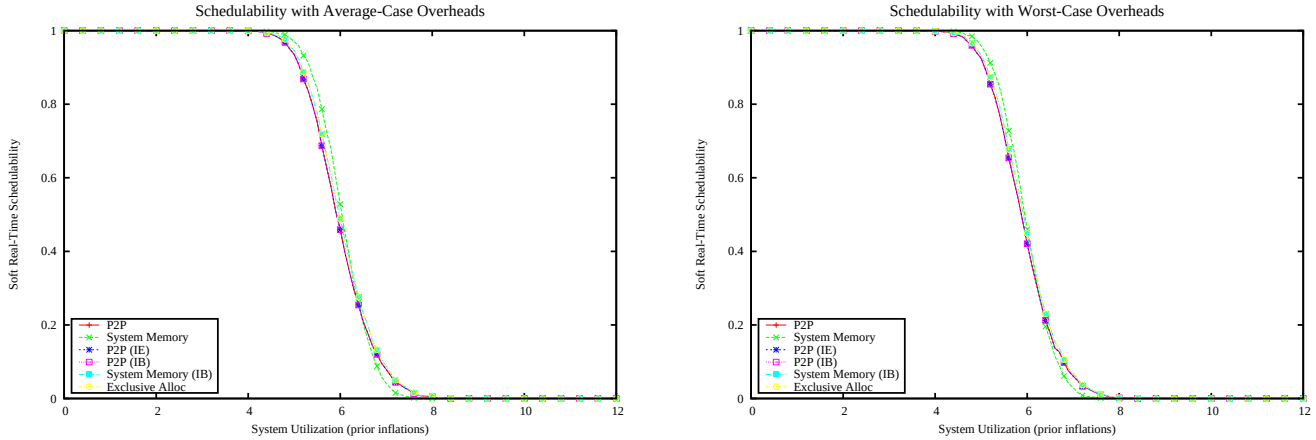

Figure 4900: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

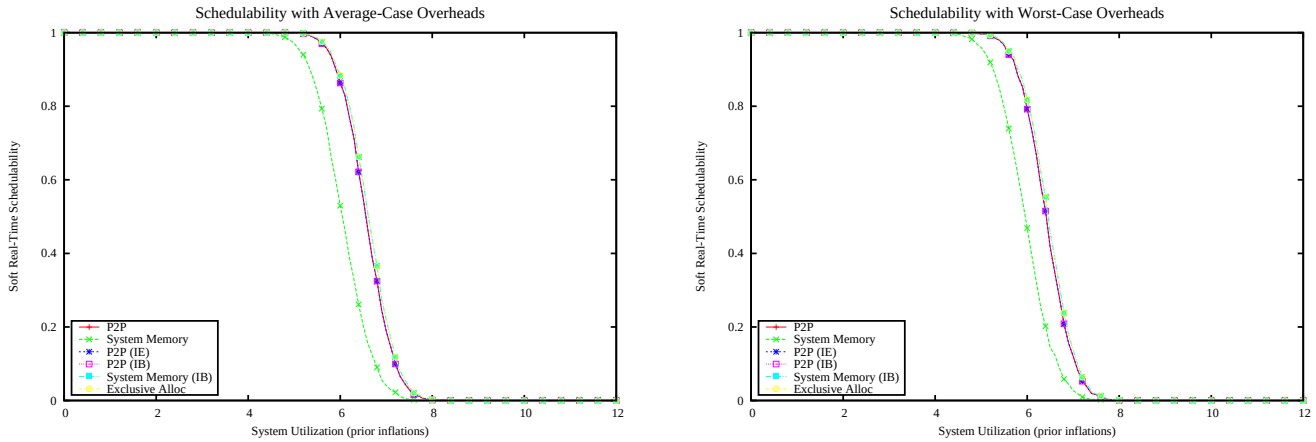

Figure 4901: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

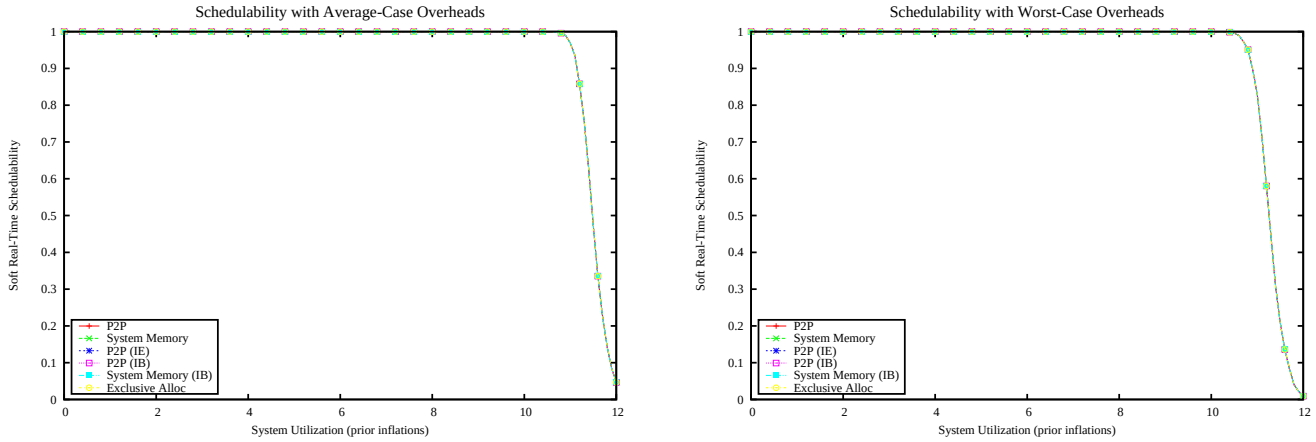

Figure 4902: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

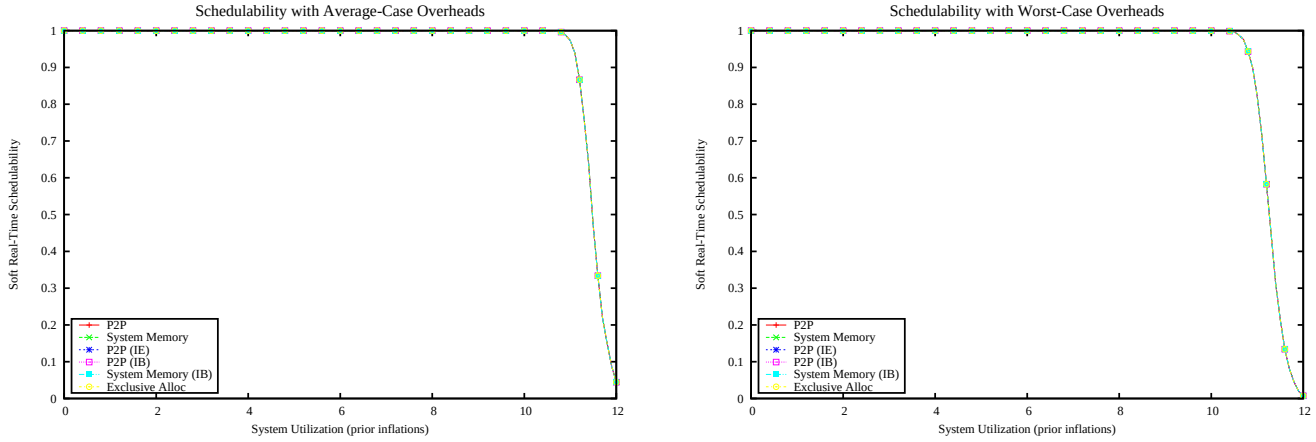

Figure 4903: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

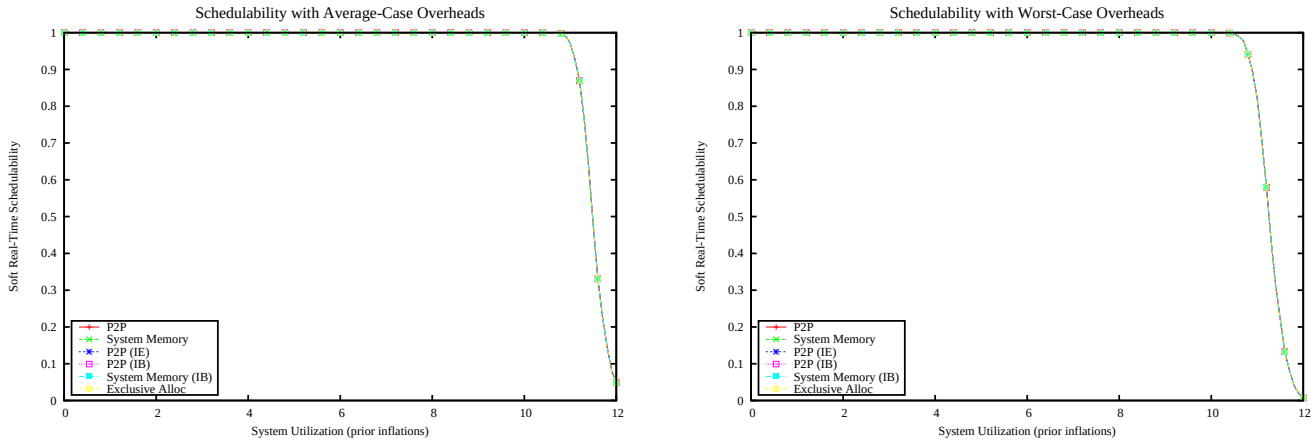

Figure 4904: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

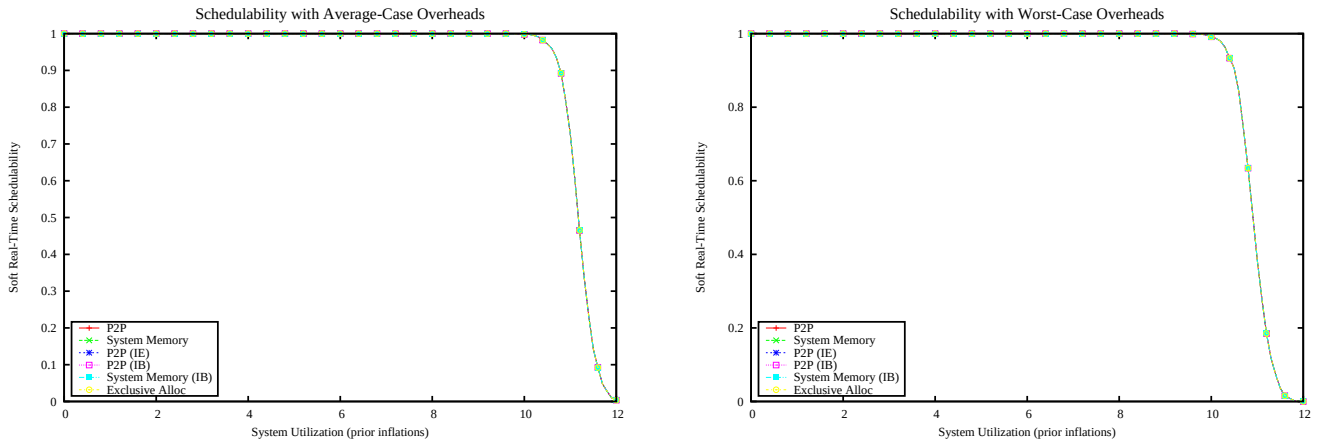

Figure 4905: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

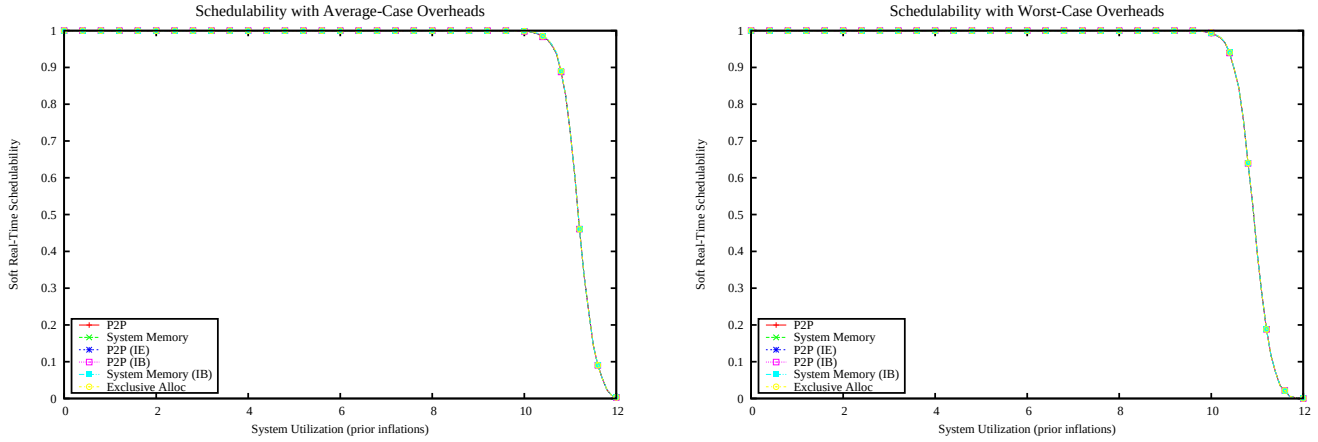

Figure 4906: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

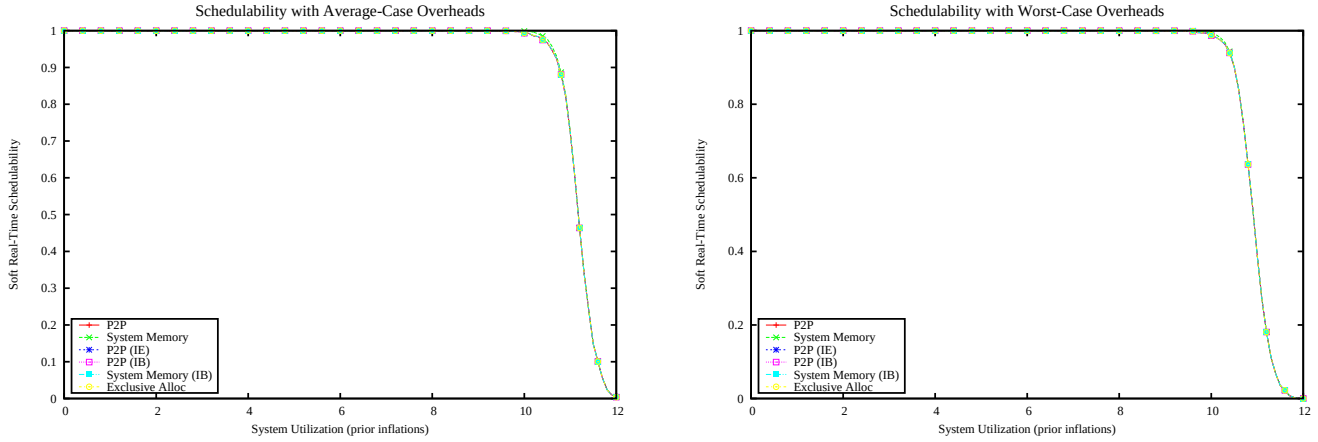

Figure 4907: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

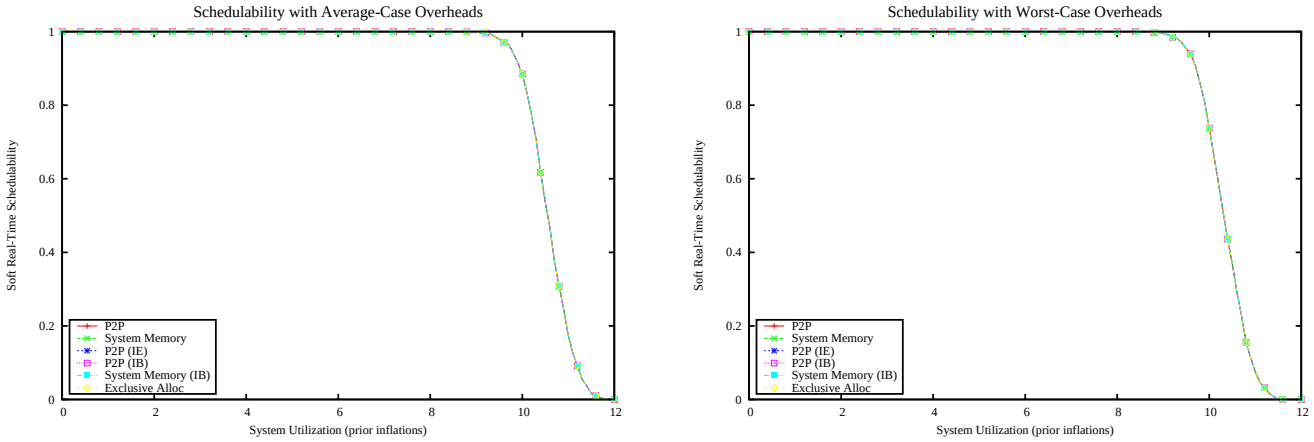

Figure 4908: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

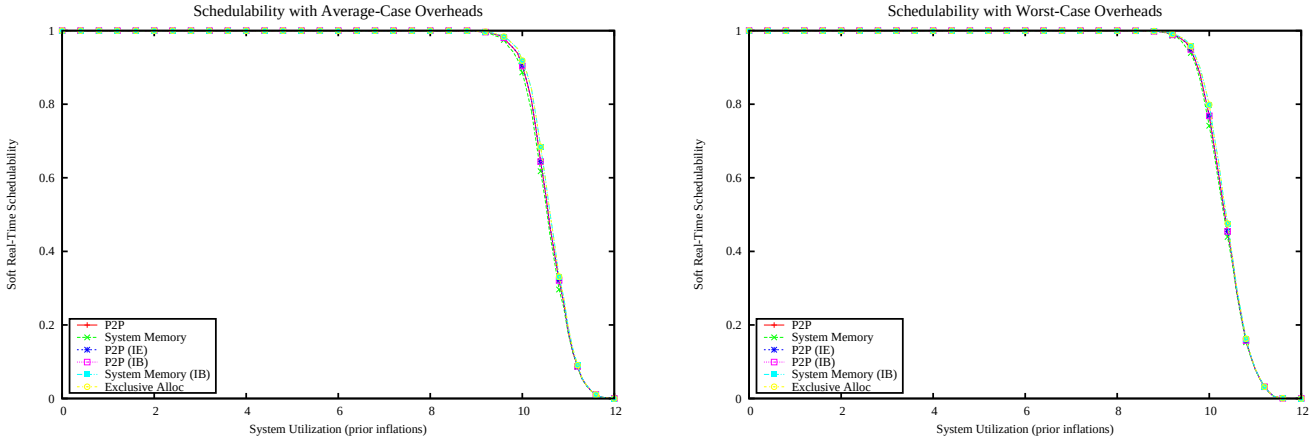

Figure 4909: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

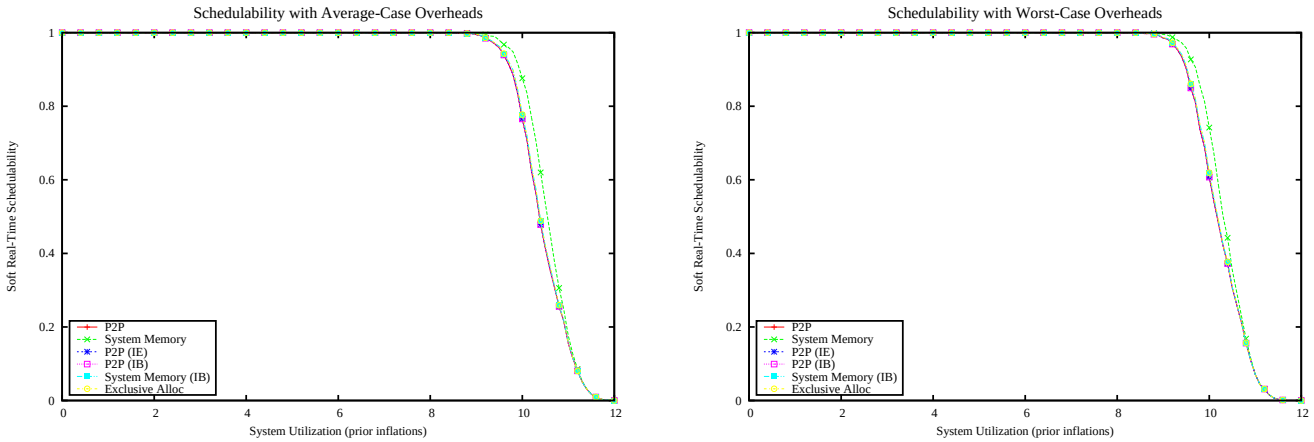

Figure 4910: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

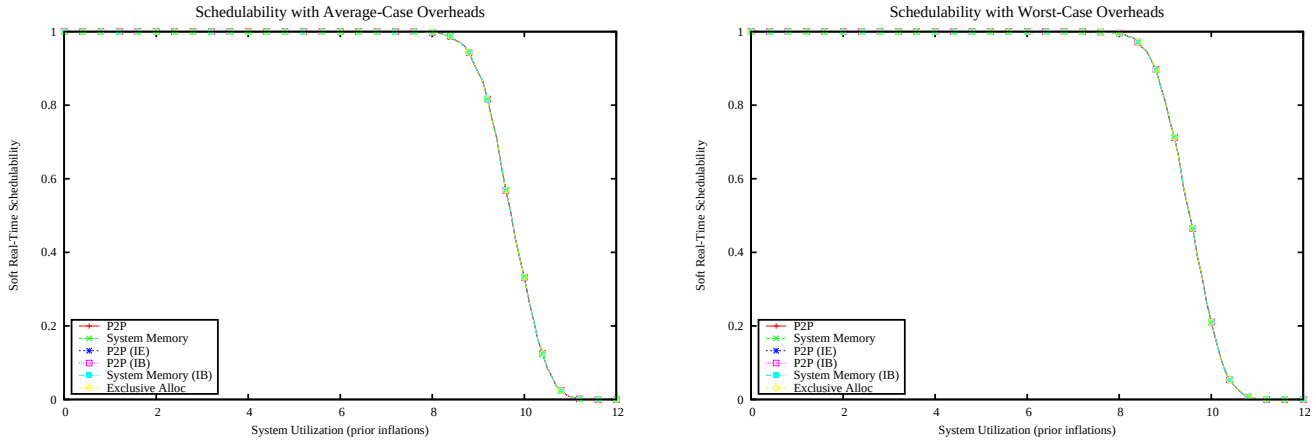

Figure 4911: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

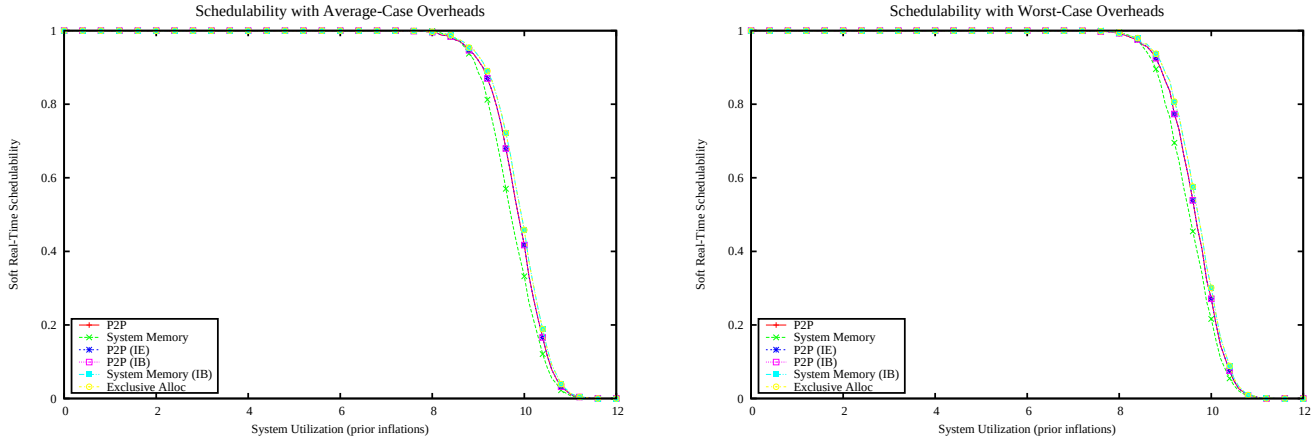

Figure 4912: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

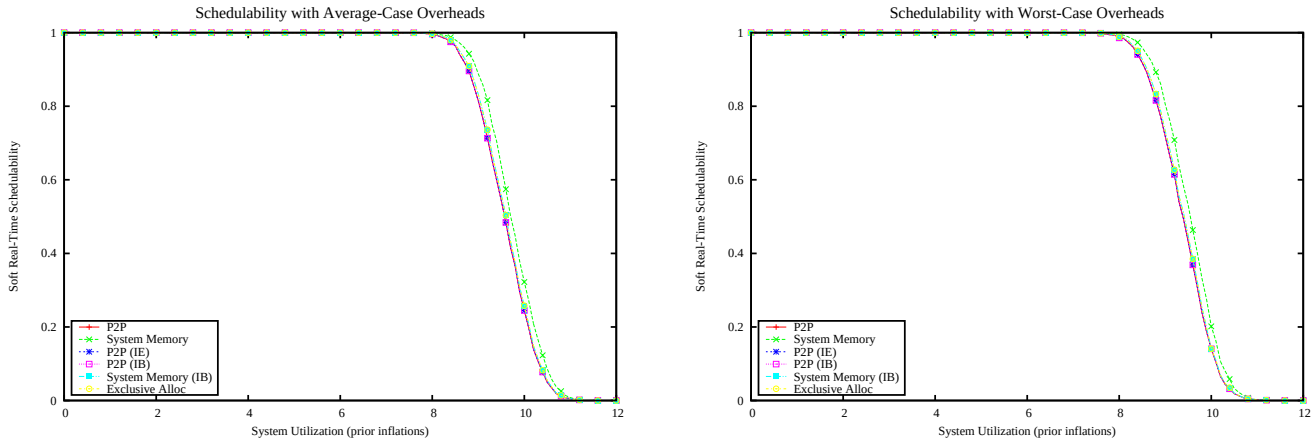

Figure 4913: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

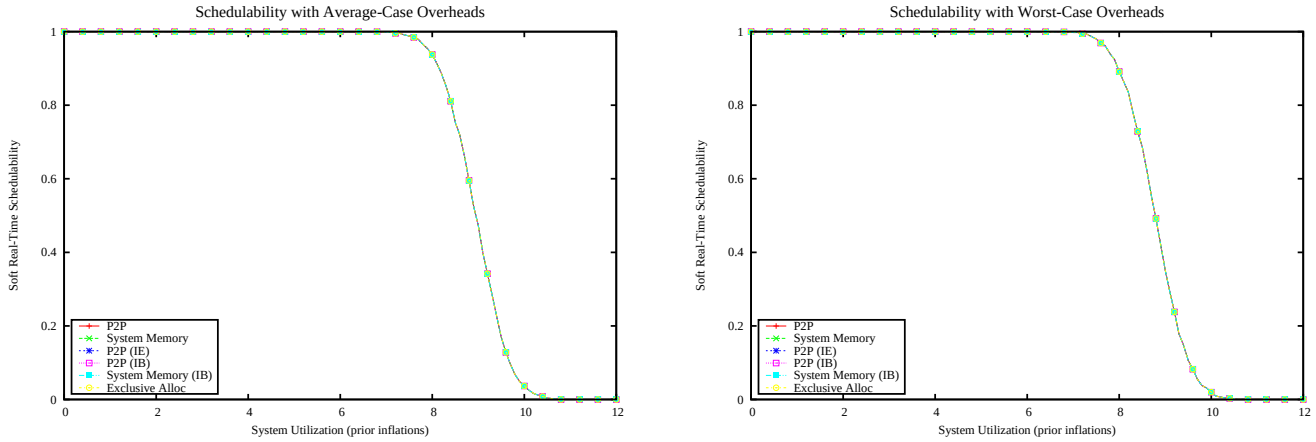

Figure 4914: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

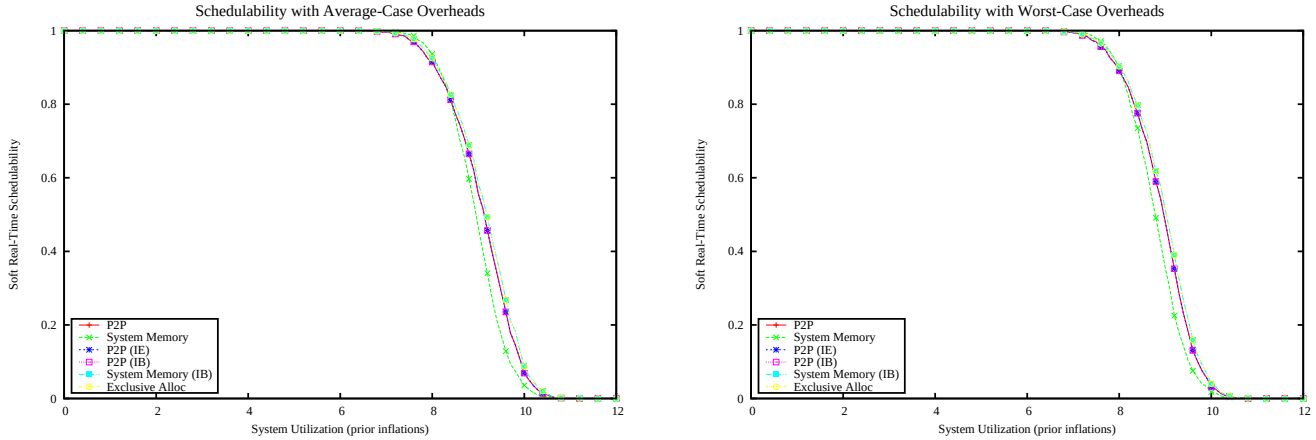

Figure 4915: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

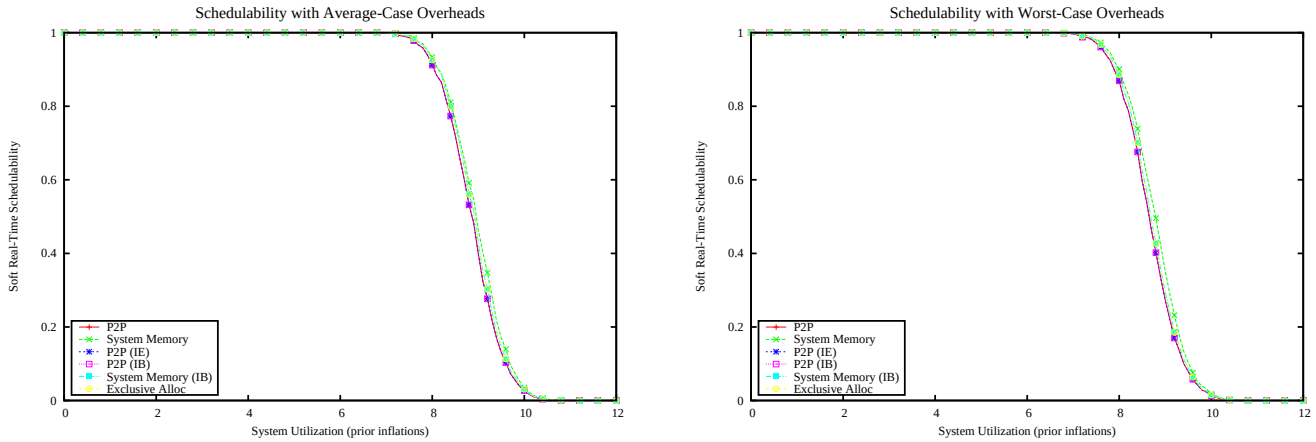

Figure 4916: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

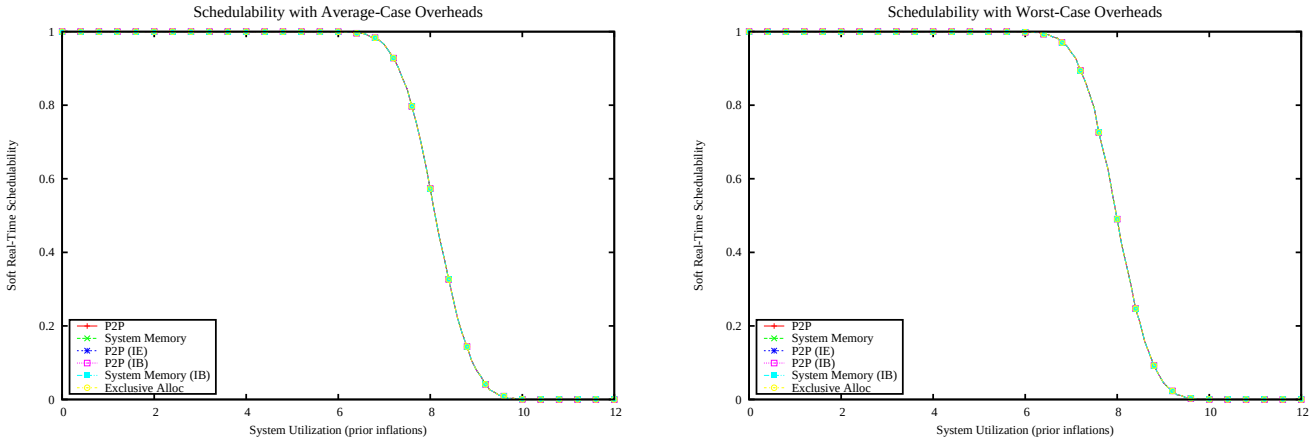

Figure 4917: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

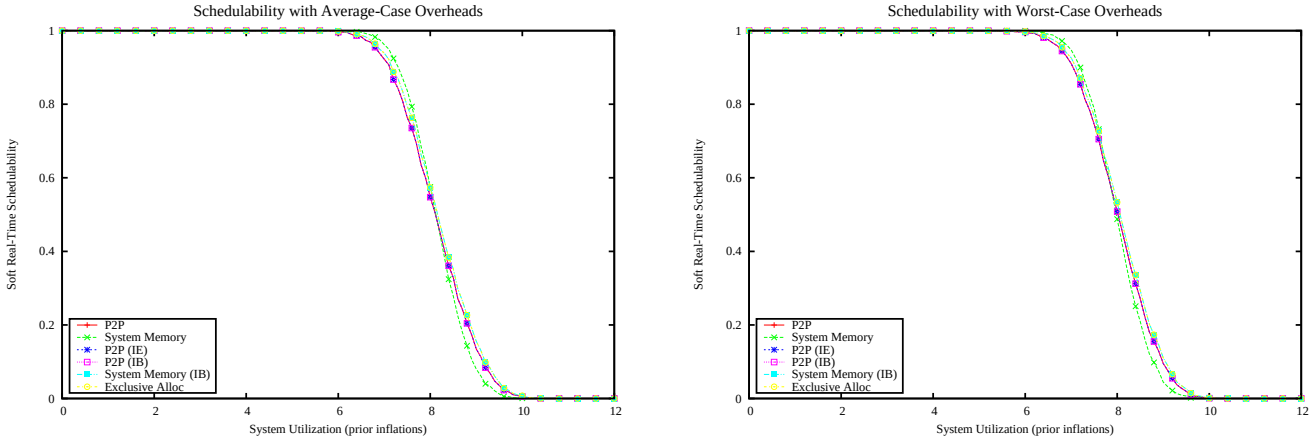

Figure 4918: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

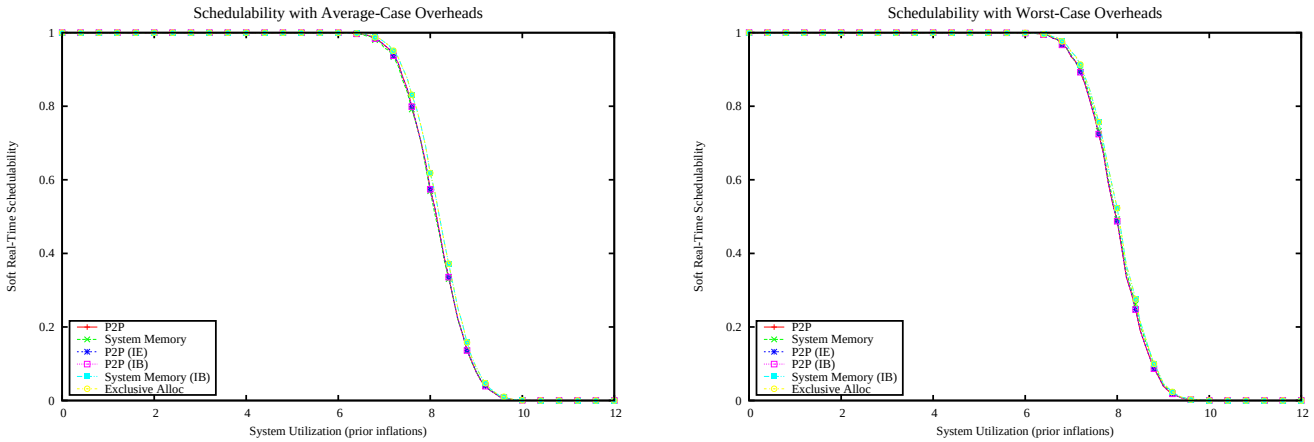

Figure 4919: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

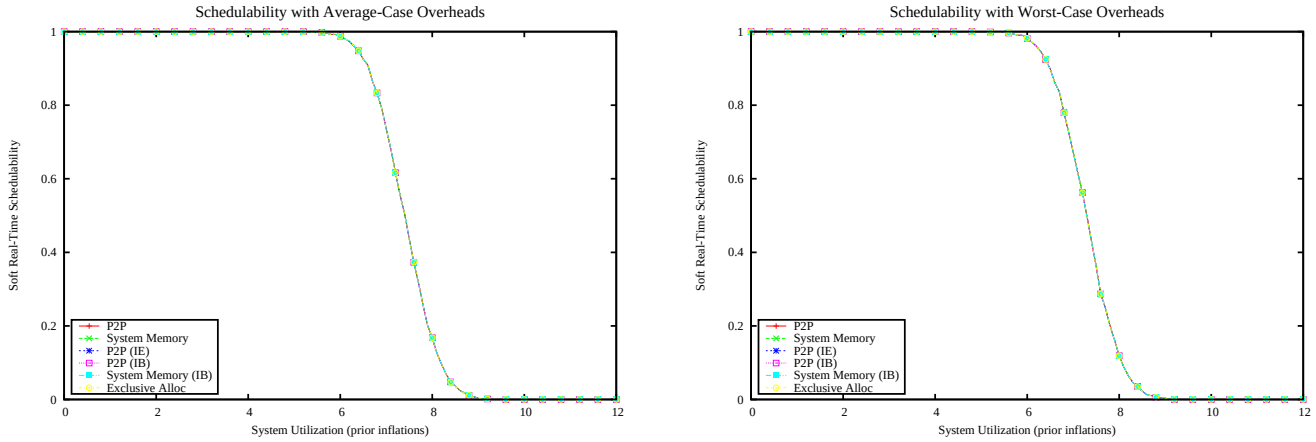

Figure 4920: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

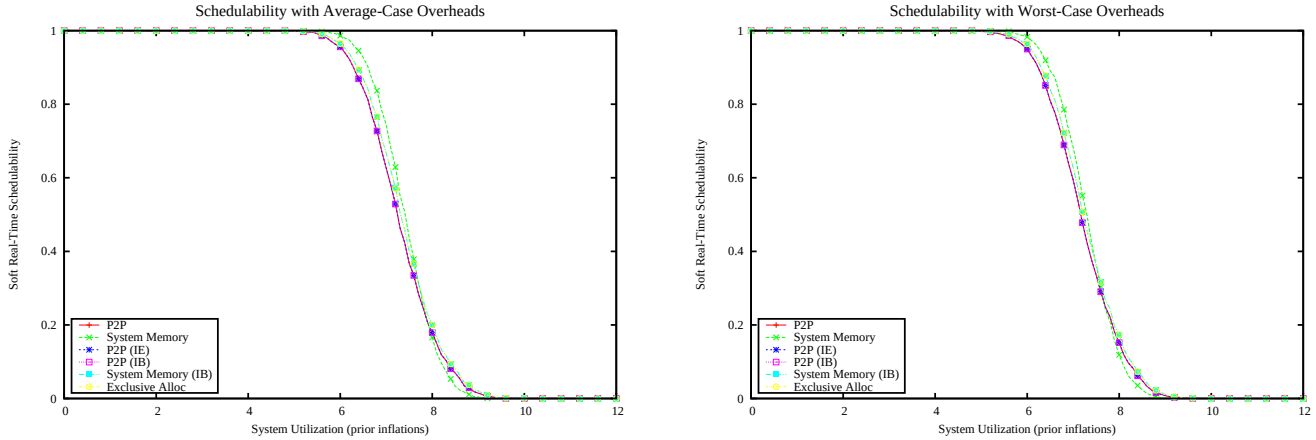

Figure 4921: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

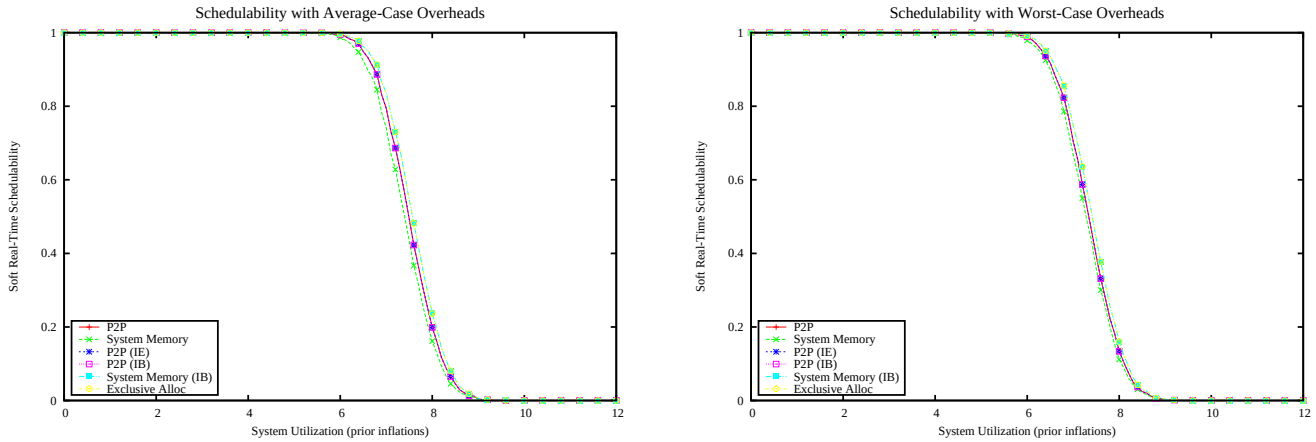

Figure 4922: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

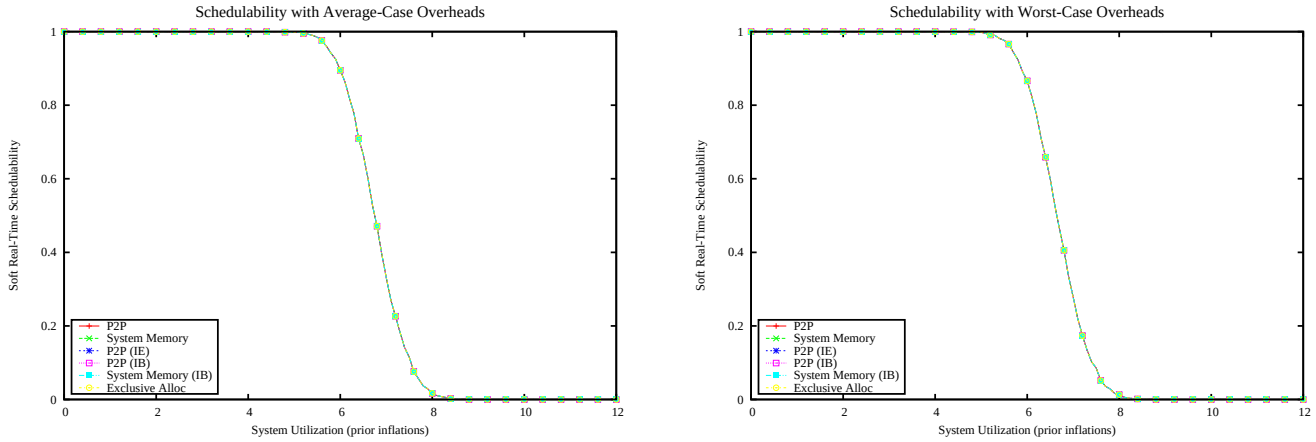

Figure 4923: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

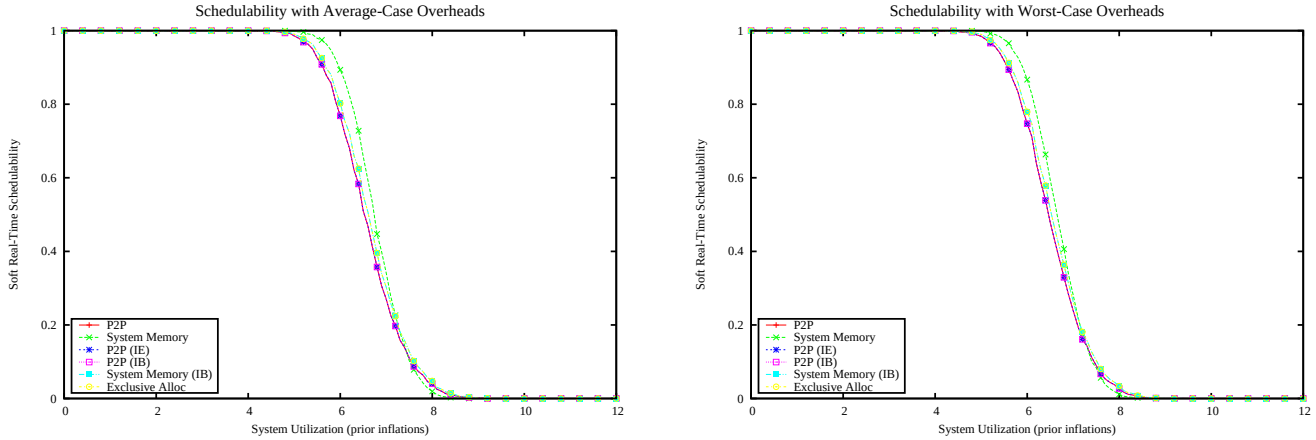

Figure 4924: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

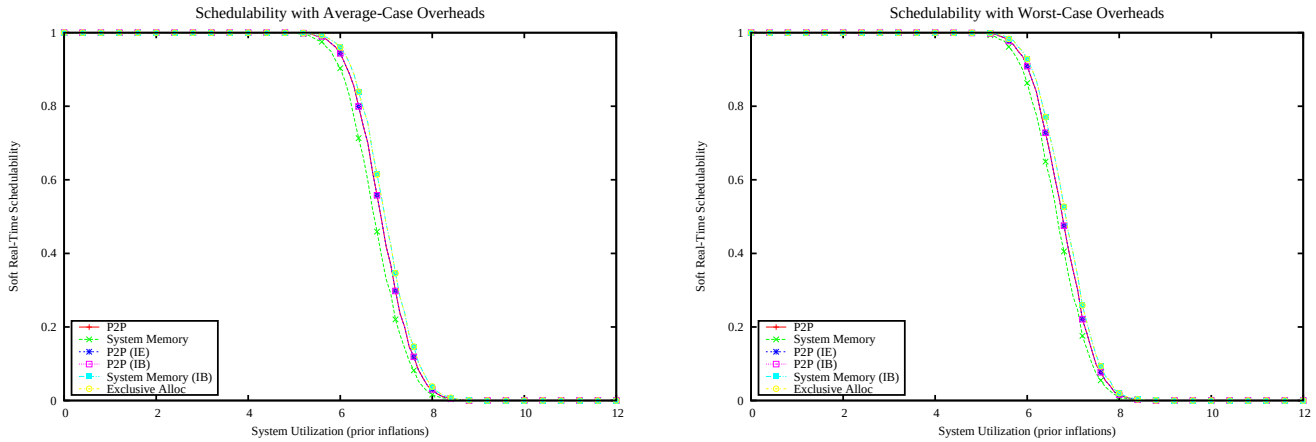

Figure 4925: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

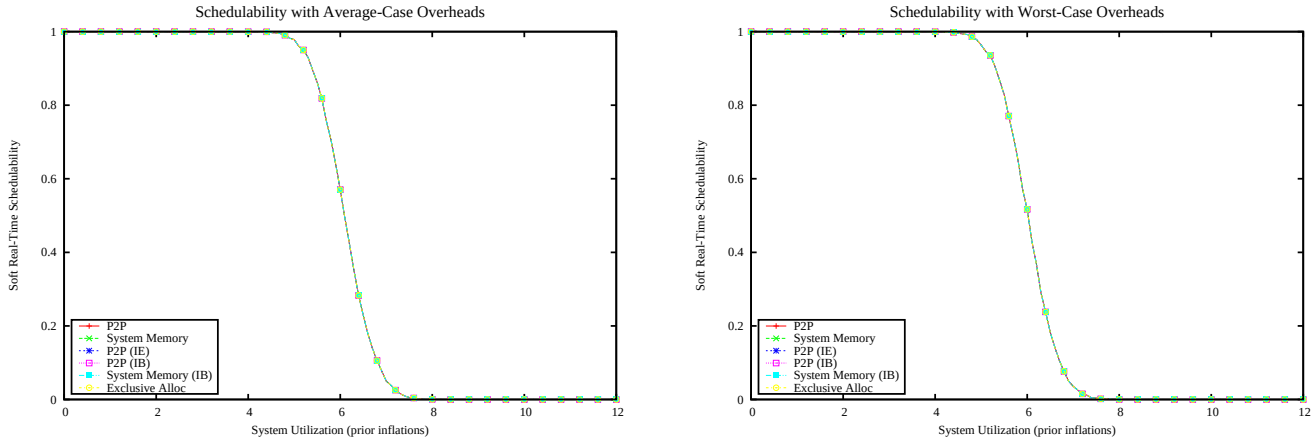

Figure 4926: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

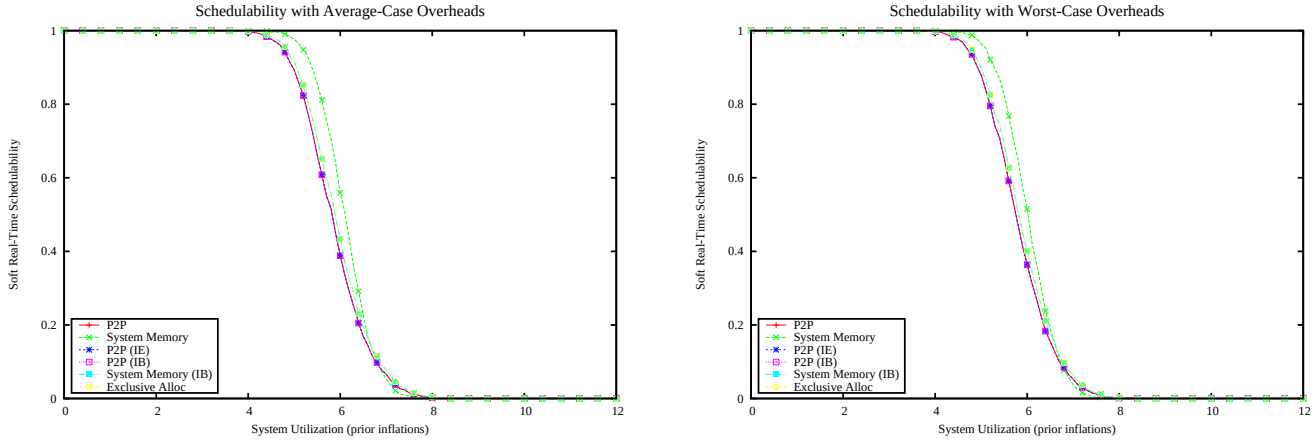

Figure 4927: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

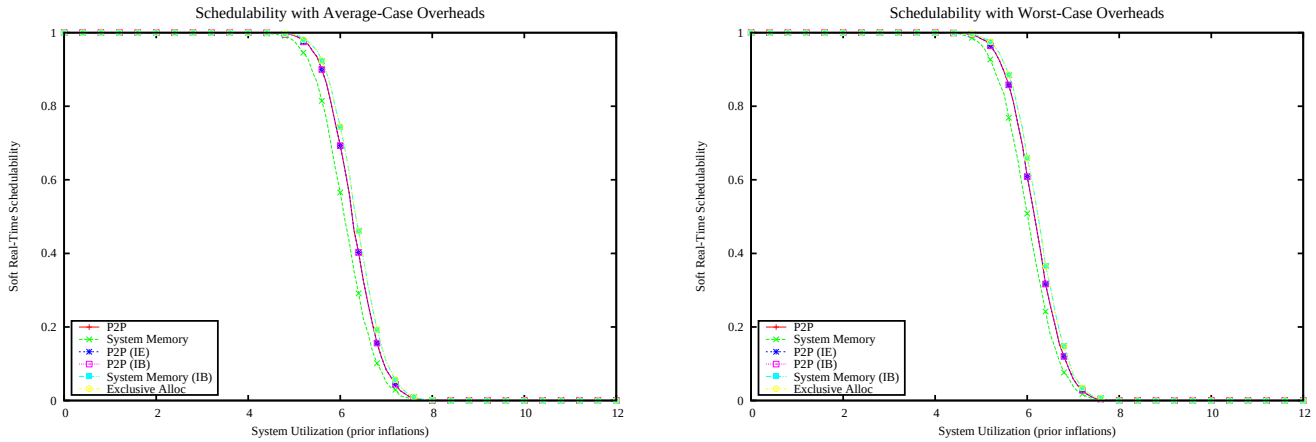

Figure 4928: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

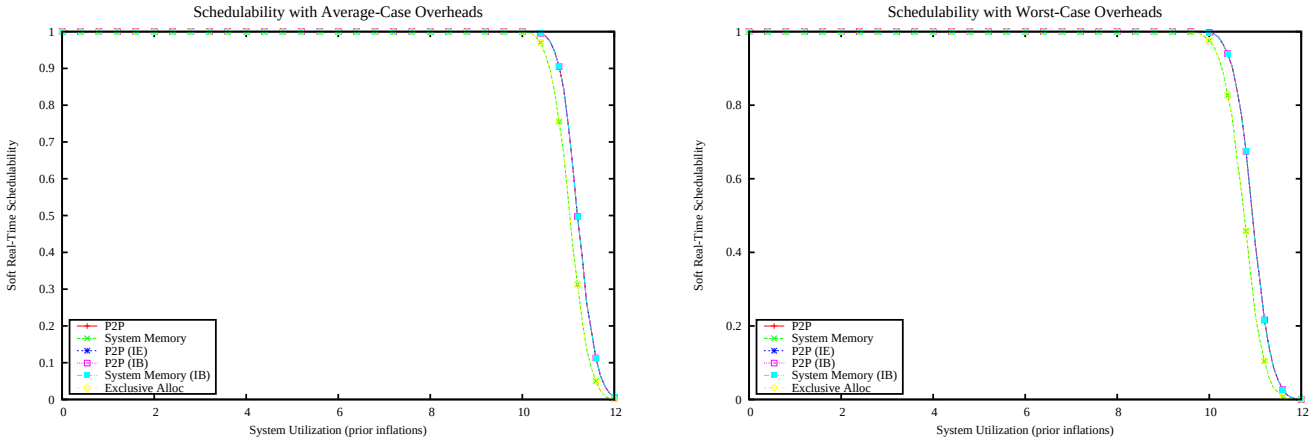

Figure 4929: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

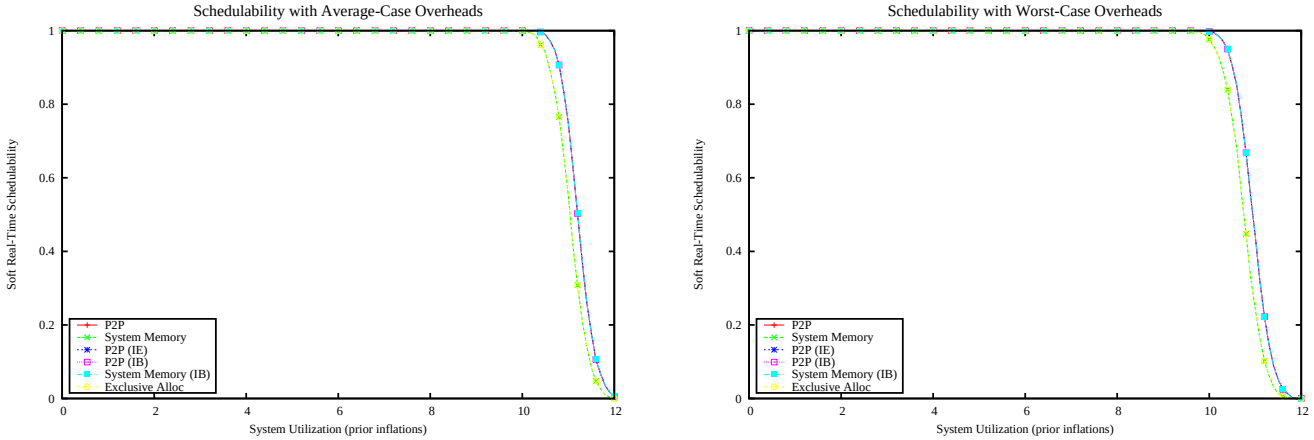

Figure 4930: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

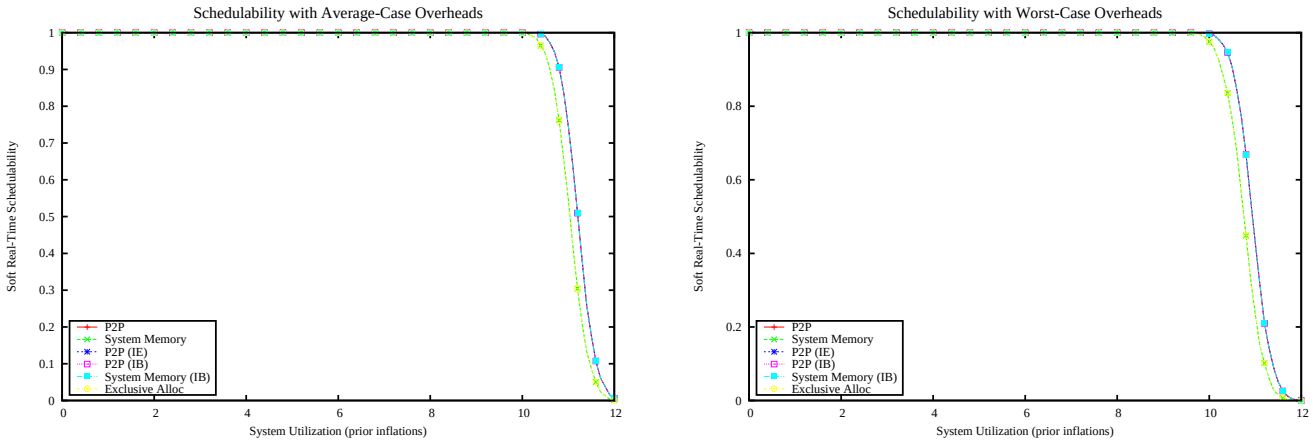

Figure 4931: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

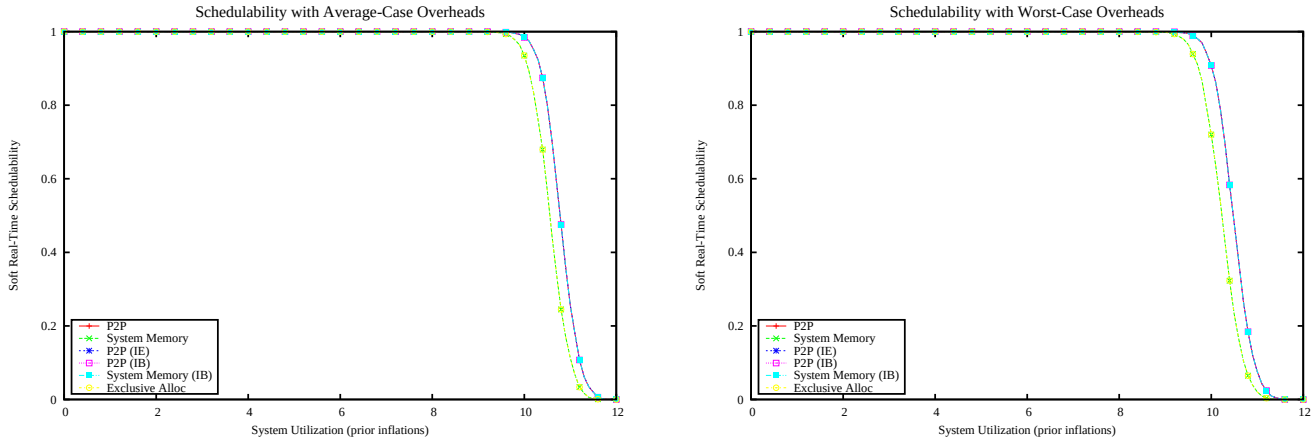

Figure 4932: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

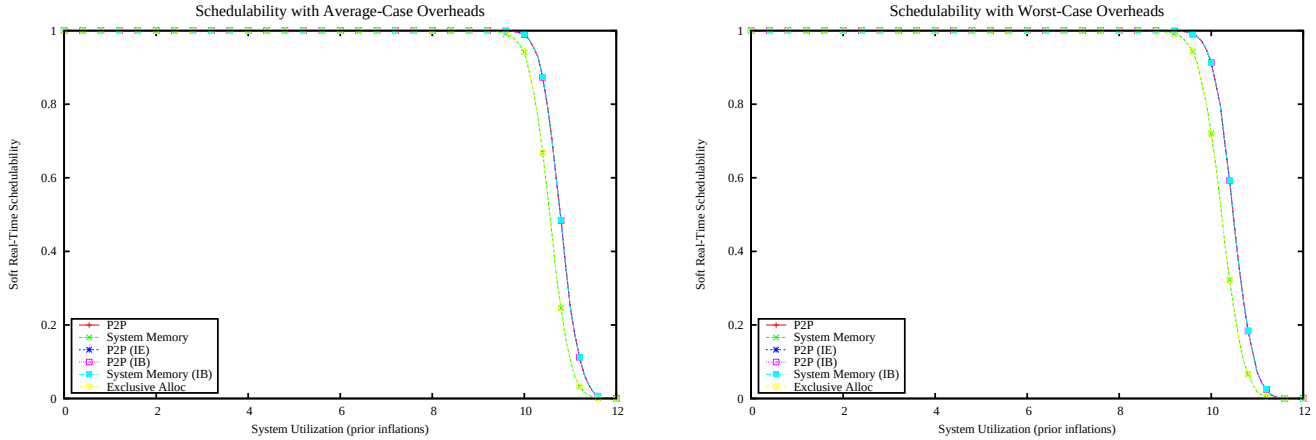

Figure 4933: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

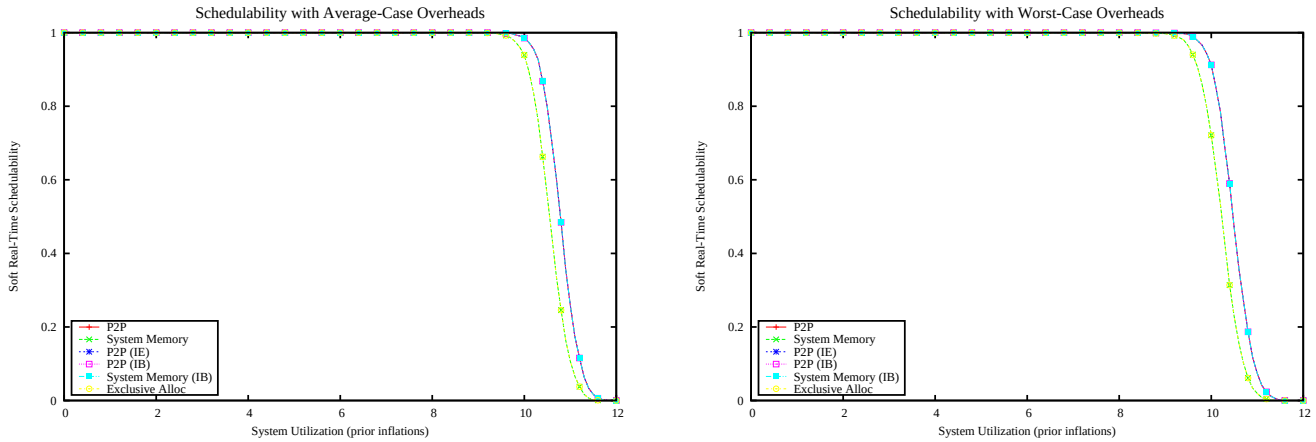

Figure 4934: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

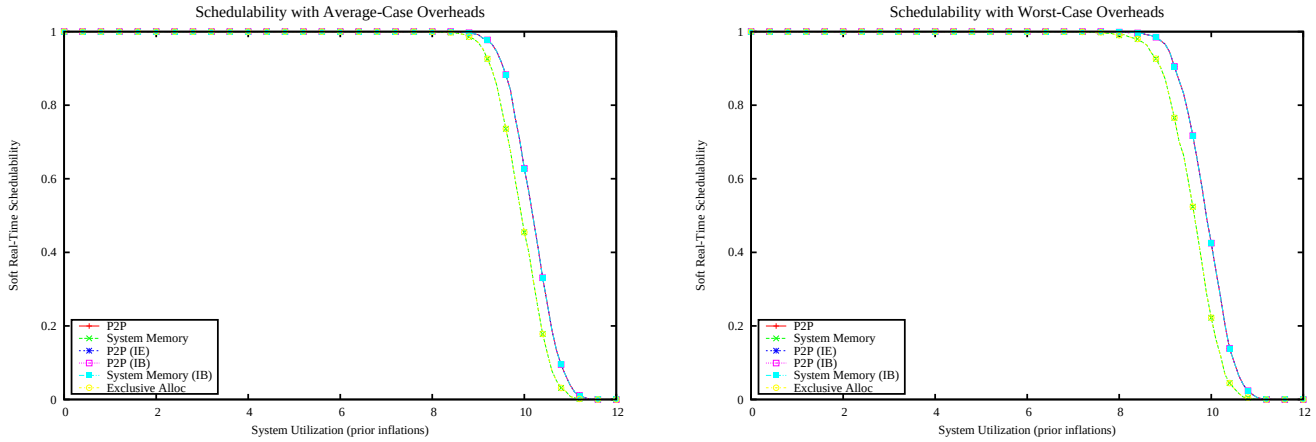

Figure 4935: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

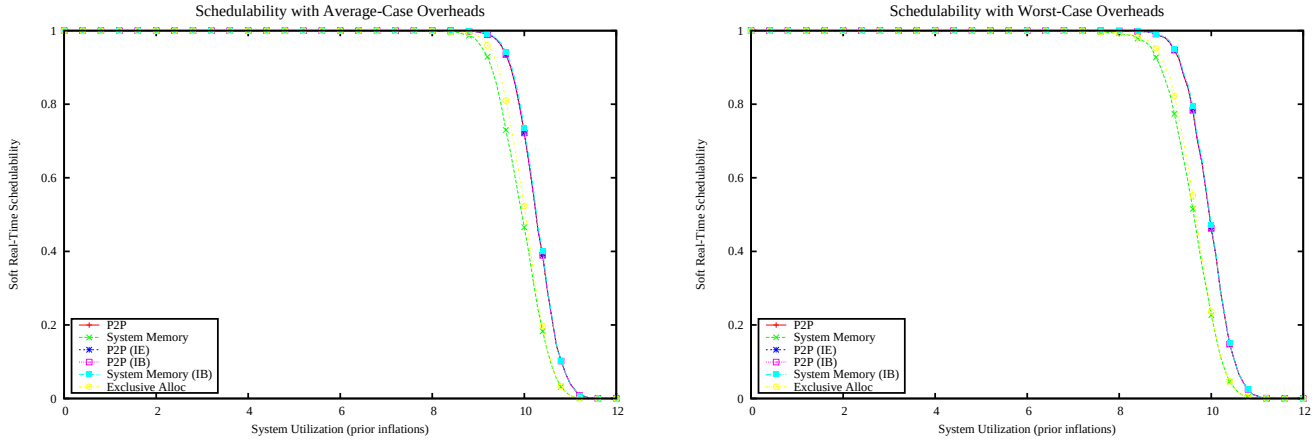

Figure 4936: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

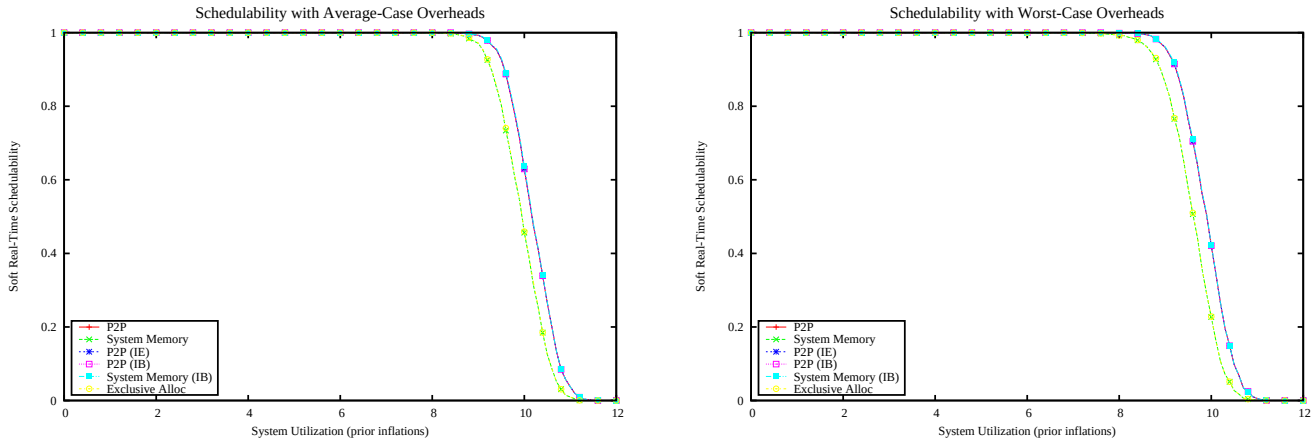

Figure 4937: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

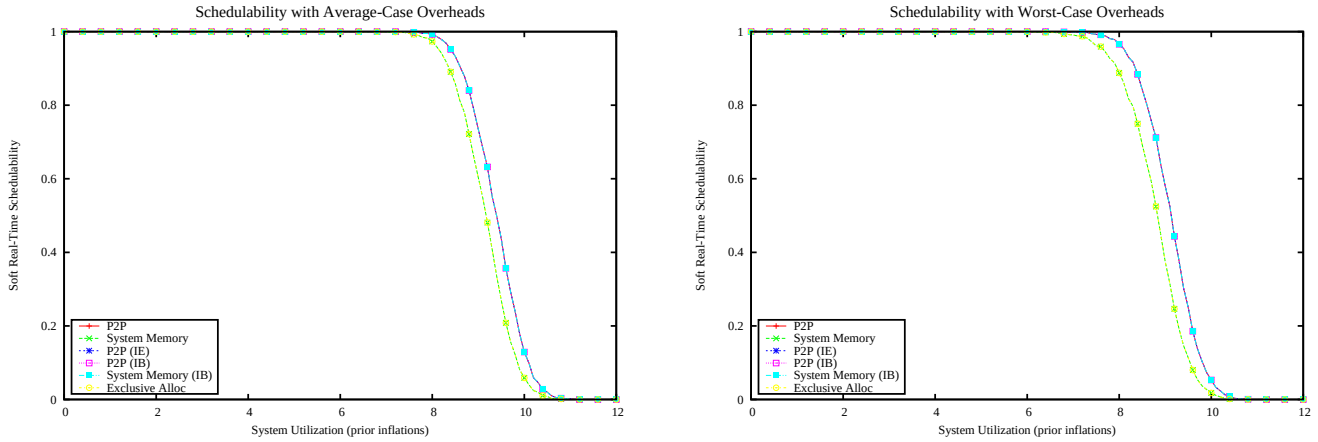

Figure 4938: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

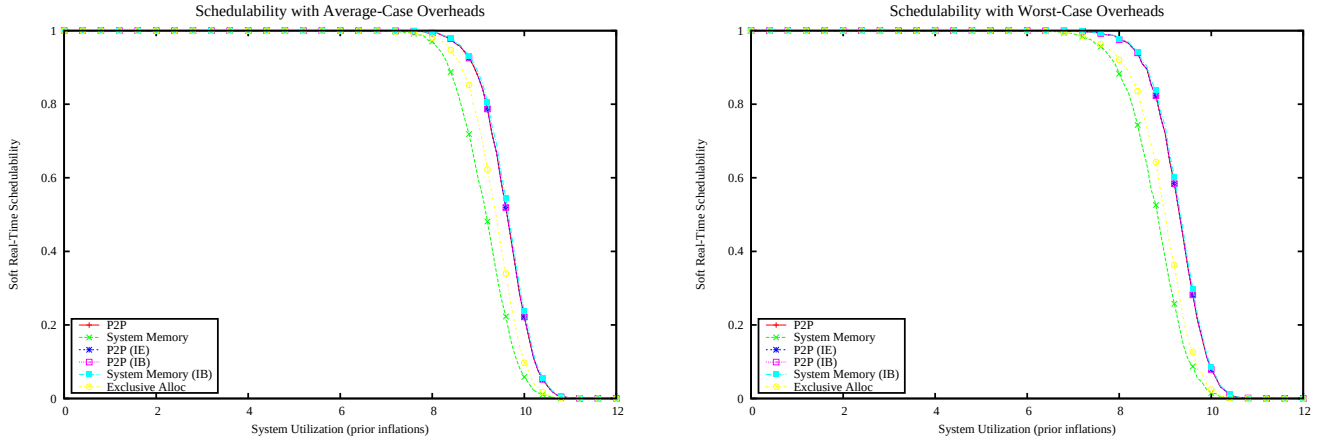

Figure 4939: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

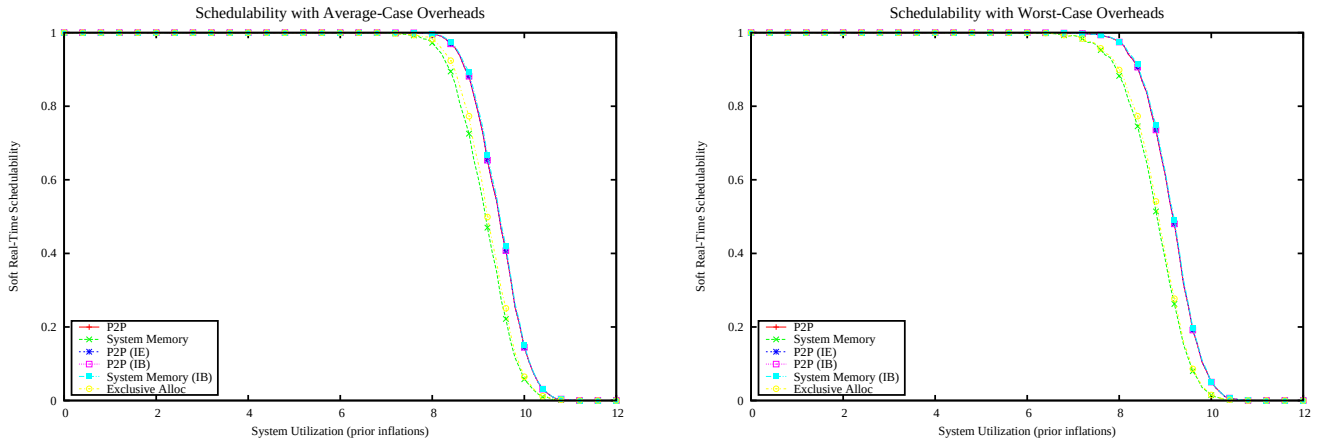

Figure 4940: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

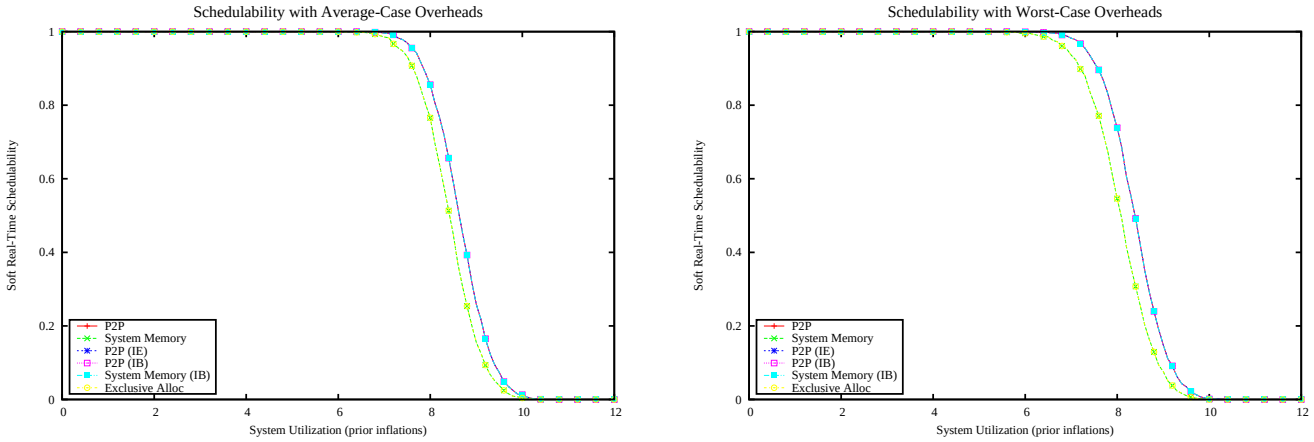

Figure 4941: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

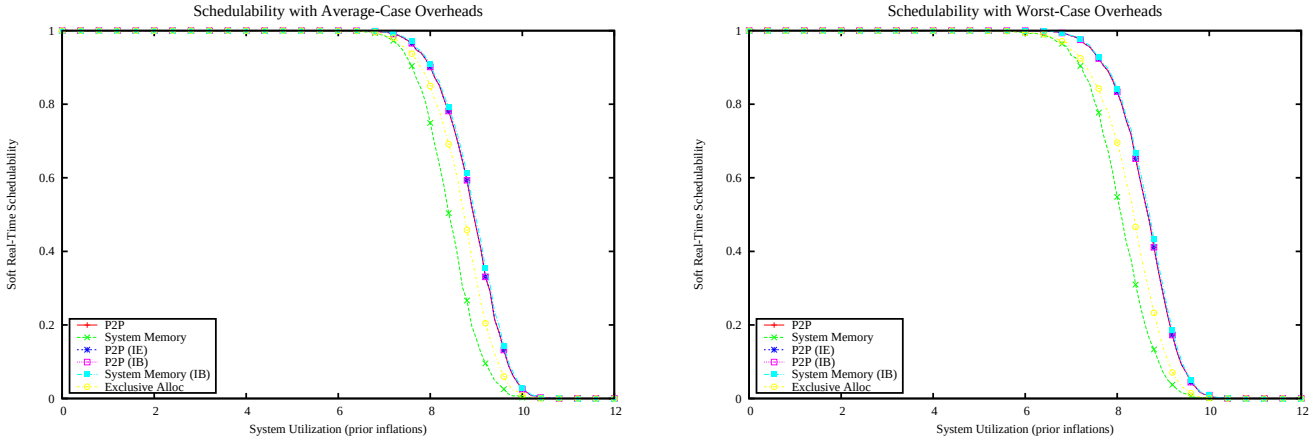

Figure 4942: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

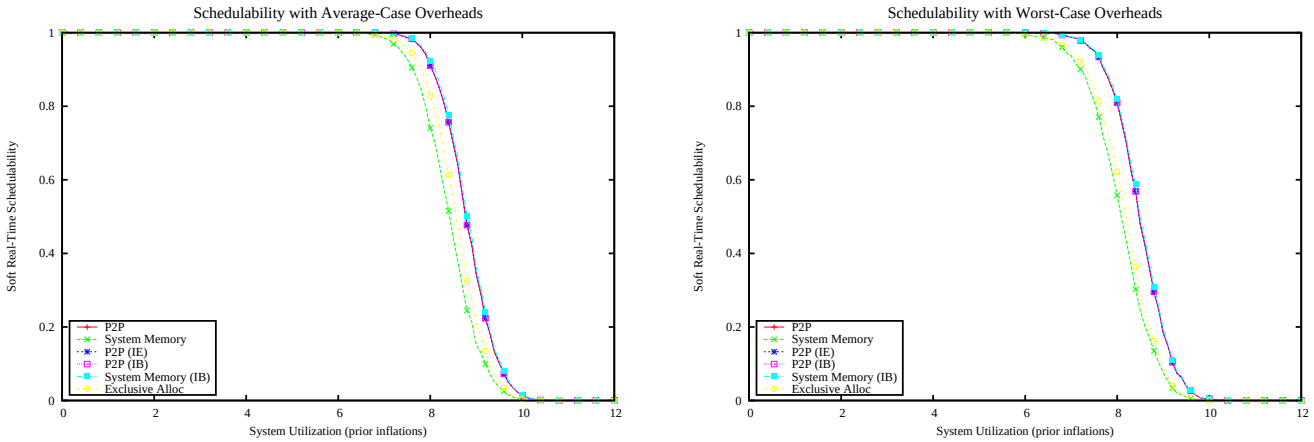

Figure 4943: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

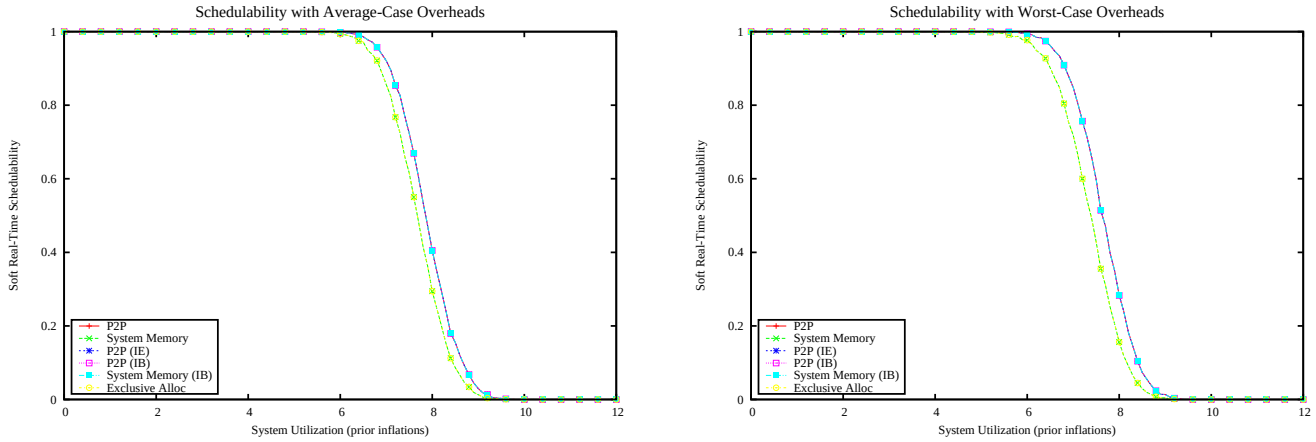

Figure 4944: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

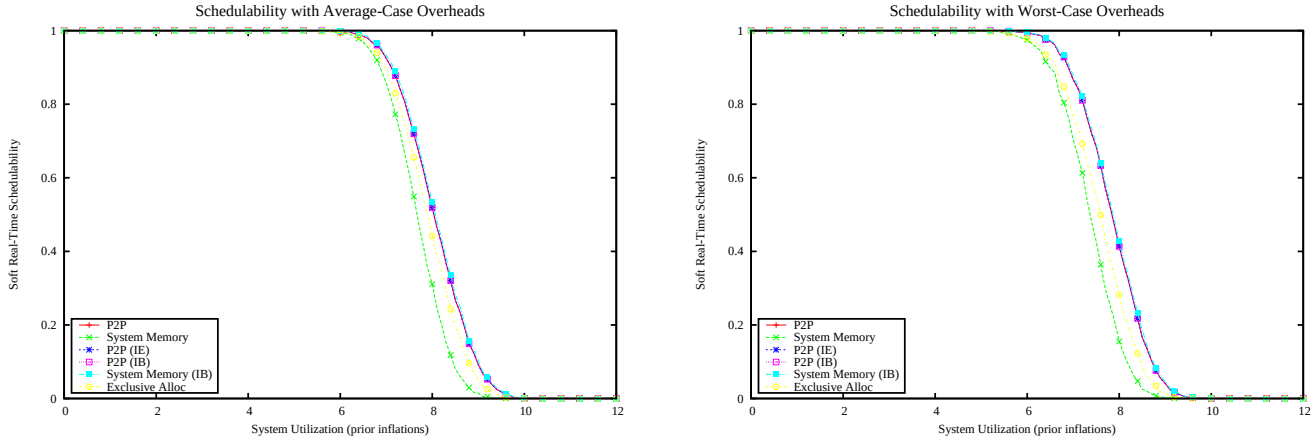

Figure 4945: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

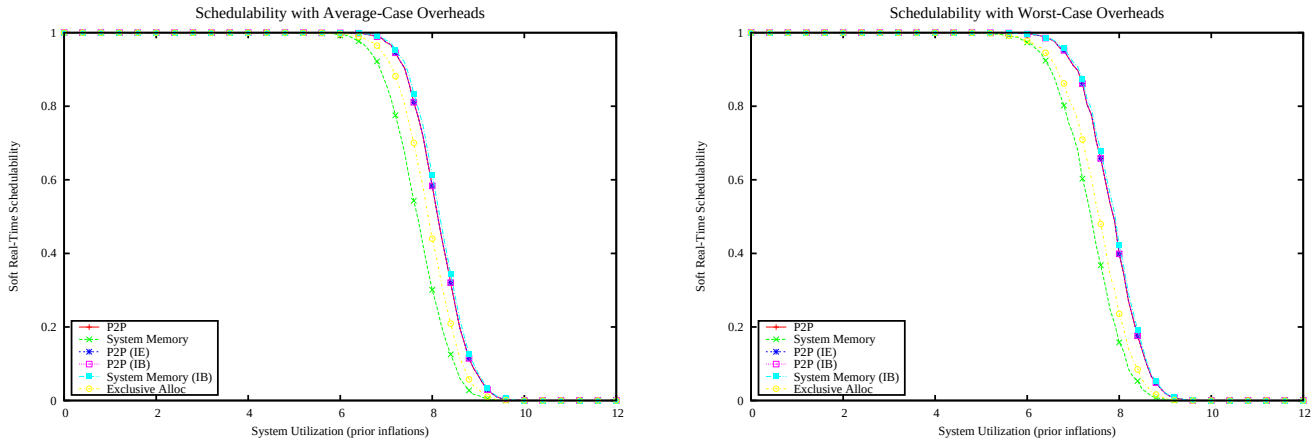

Figure 4946: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

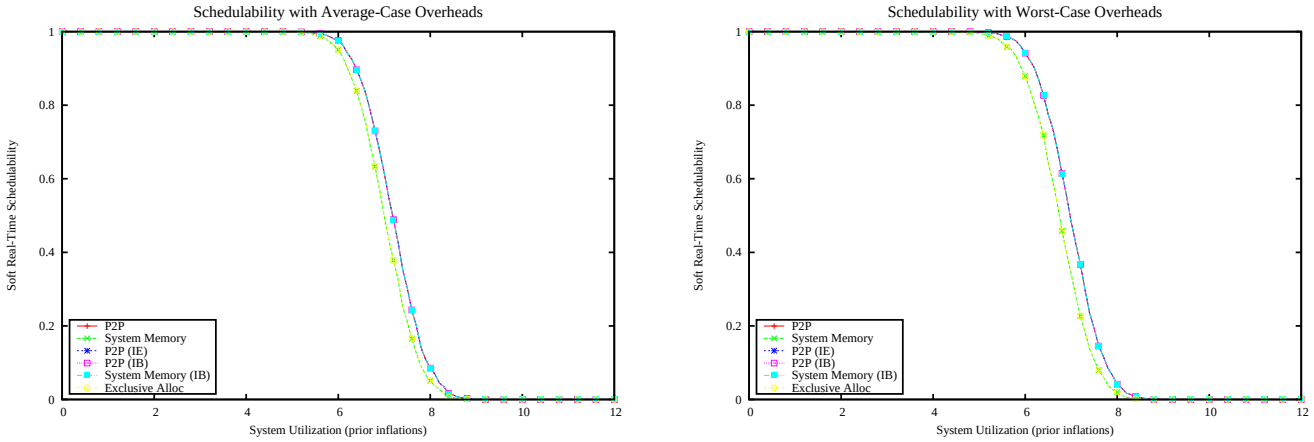

Figure 4947: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

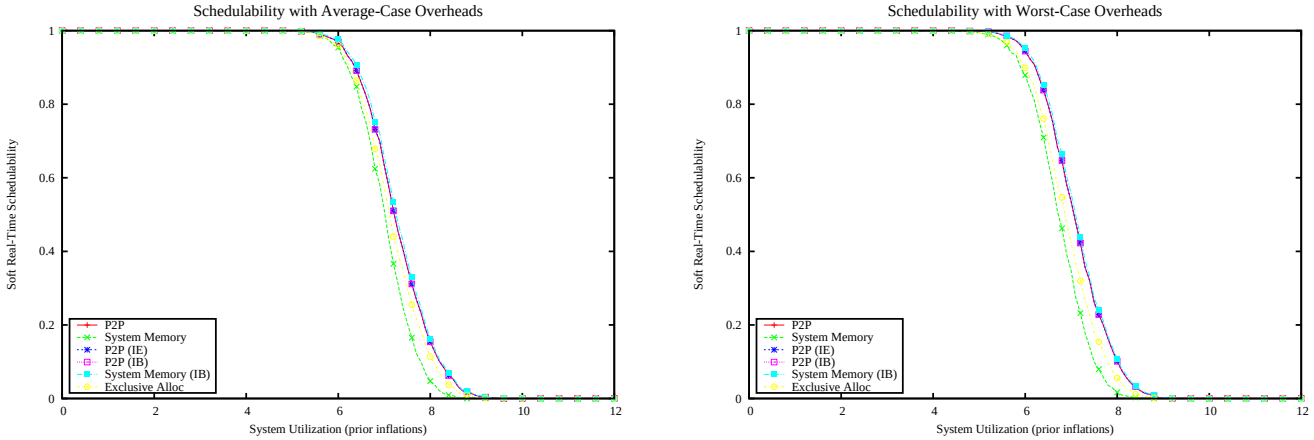

Figure 4948: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

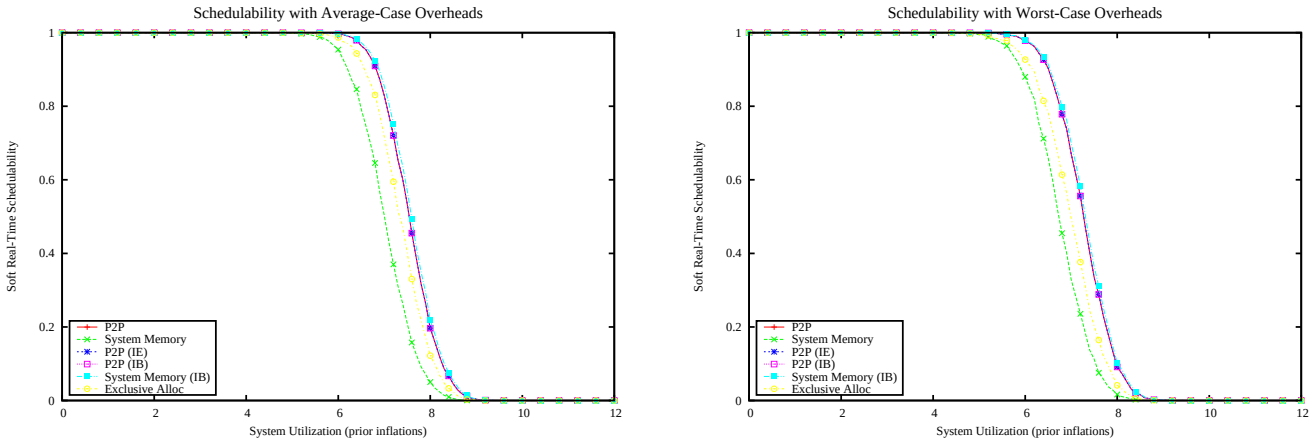

Figure 4949: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

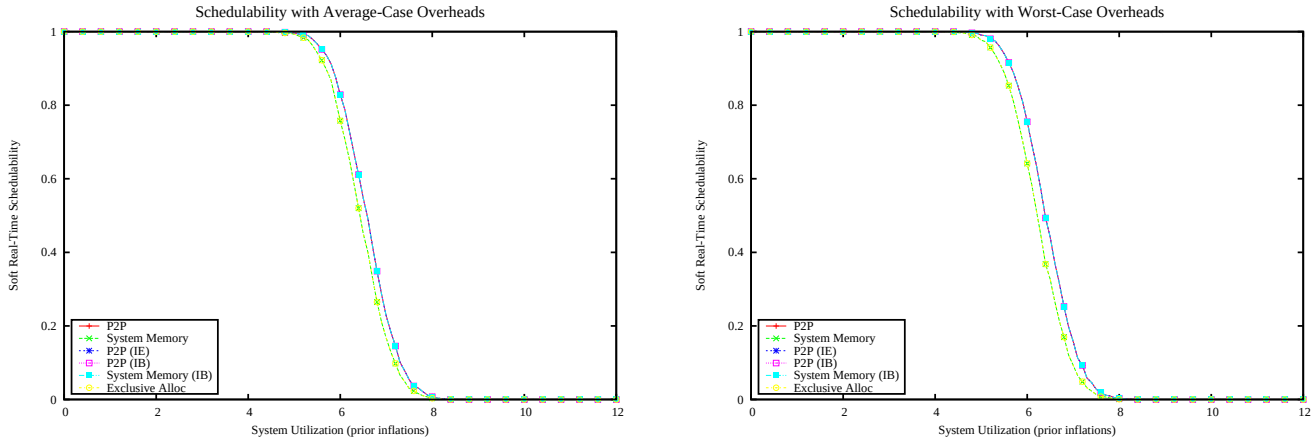

Figure 4950: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

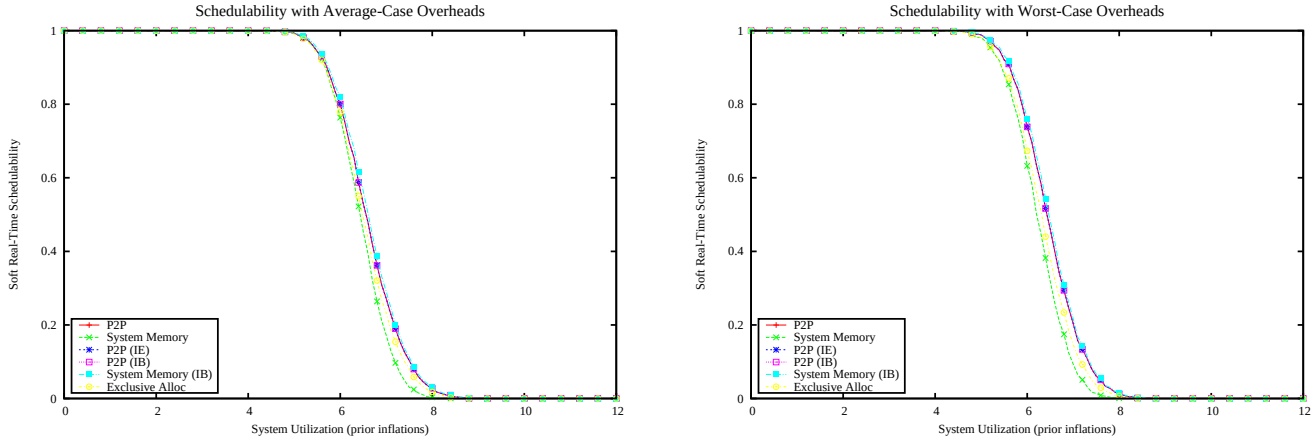

Figure 4951: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

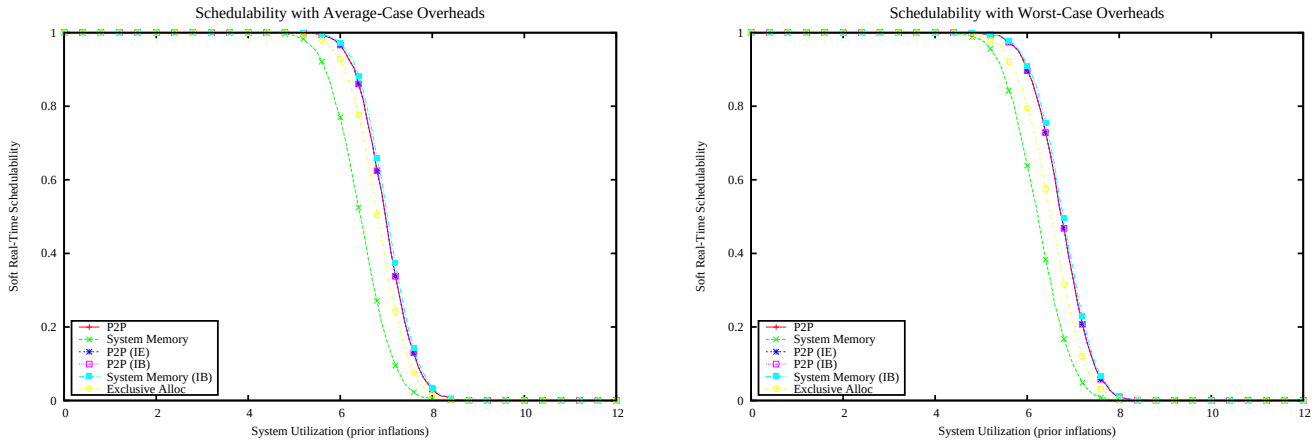

Figure 4952: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

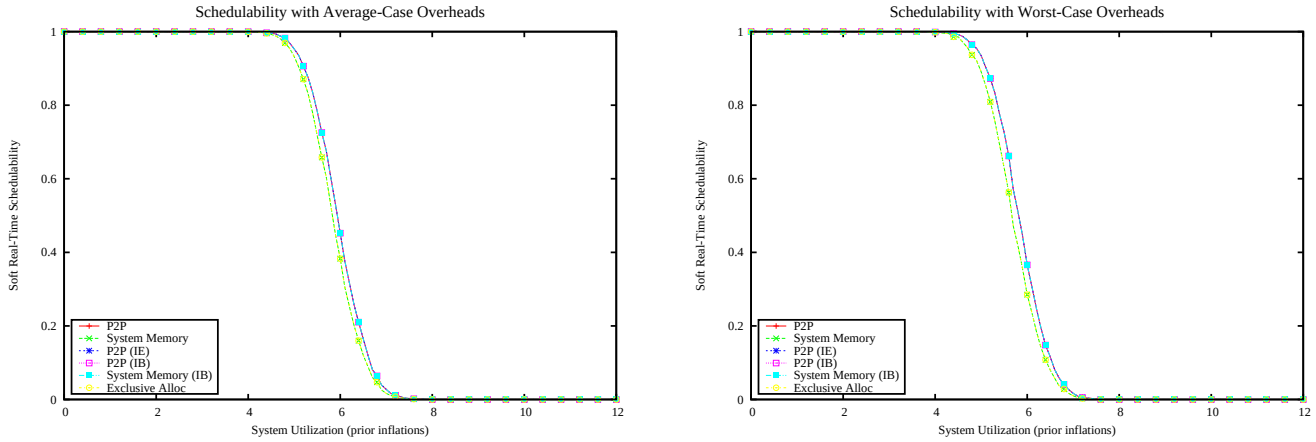

Figure 4953: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

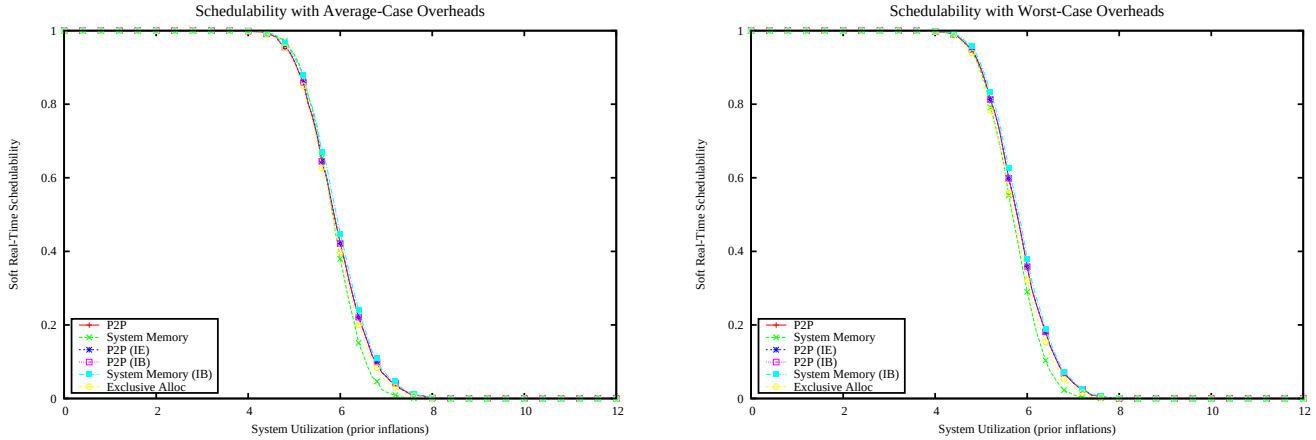

Figure 4954: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

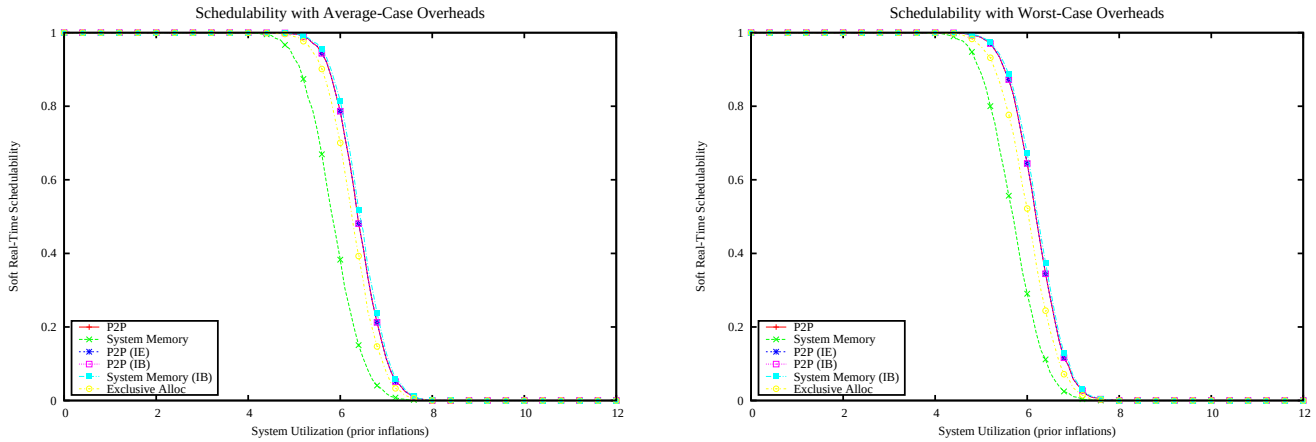

Figure 4955: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

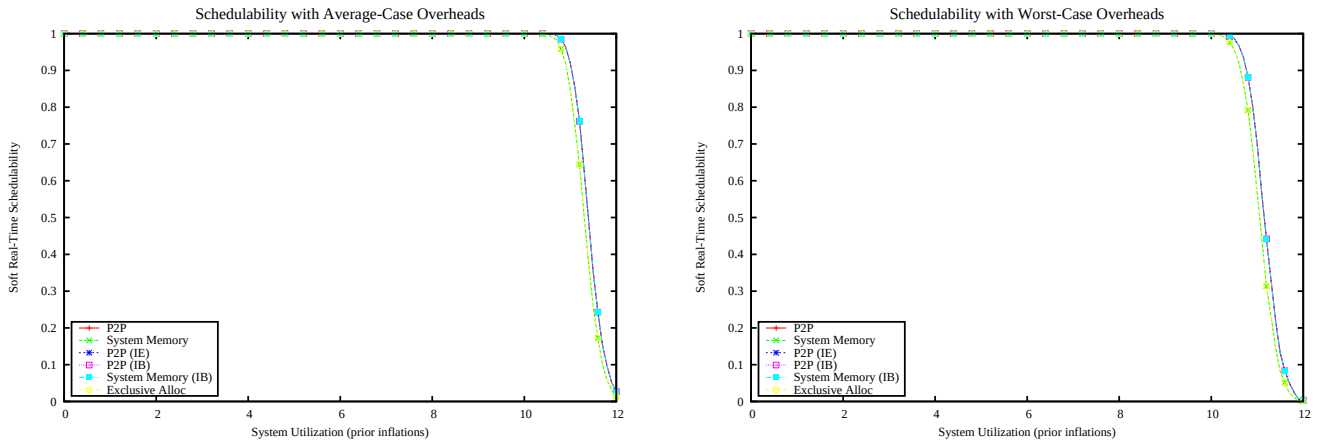

Figure 4956: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

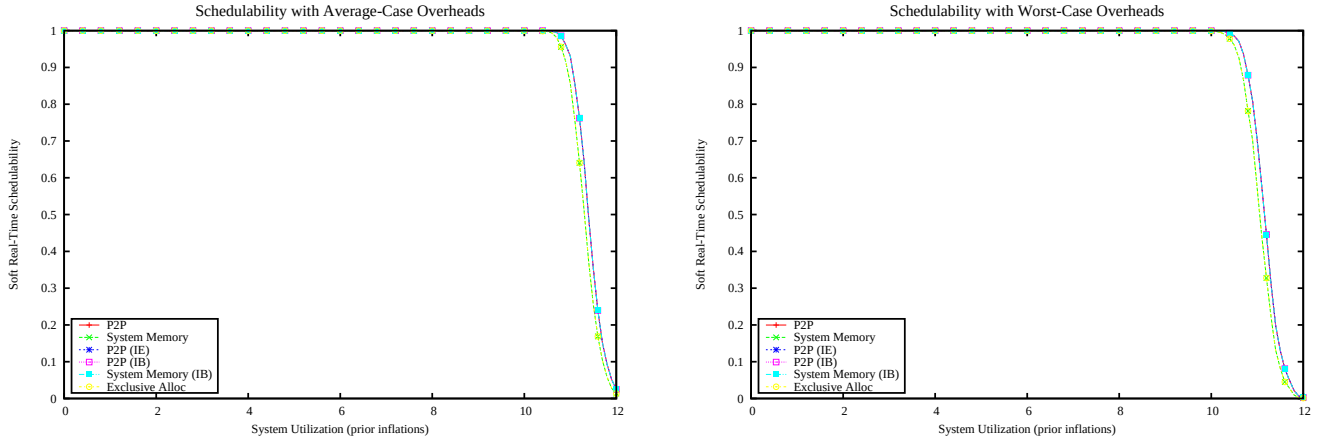

Figure 4957: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

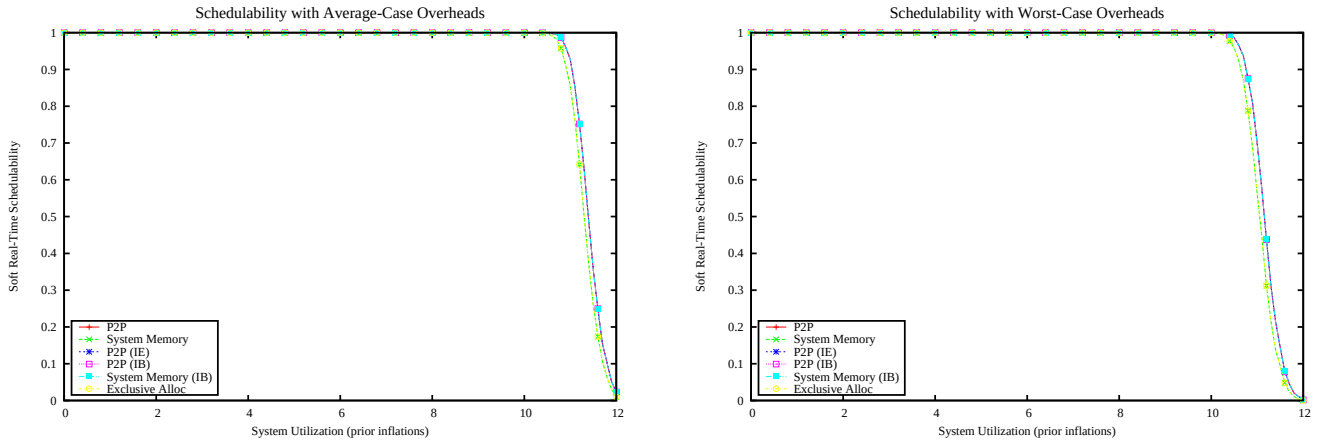

Figure 4958: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

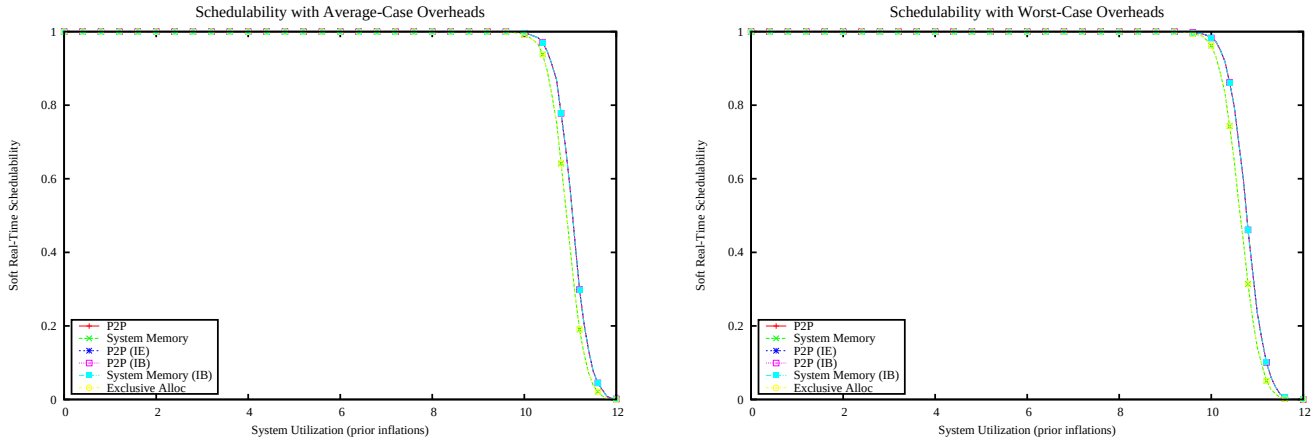

Figure 4959: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

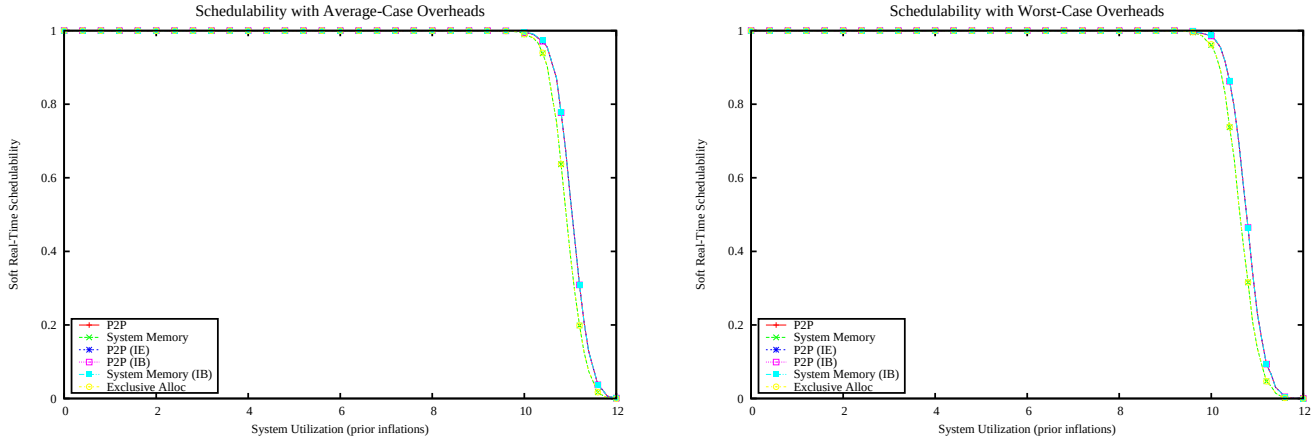

Figure 4960: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

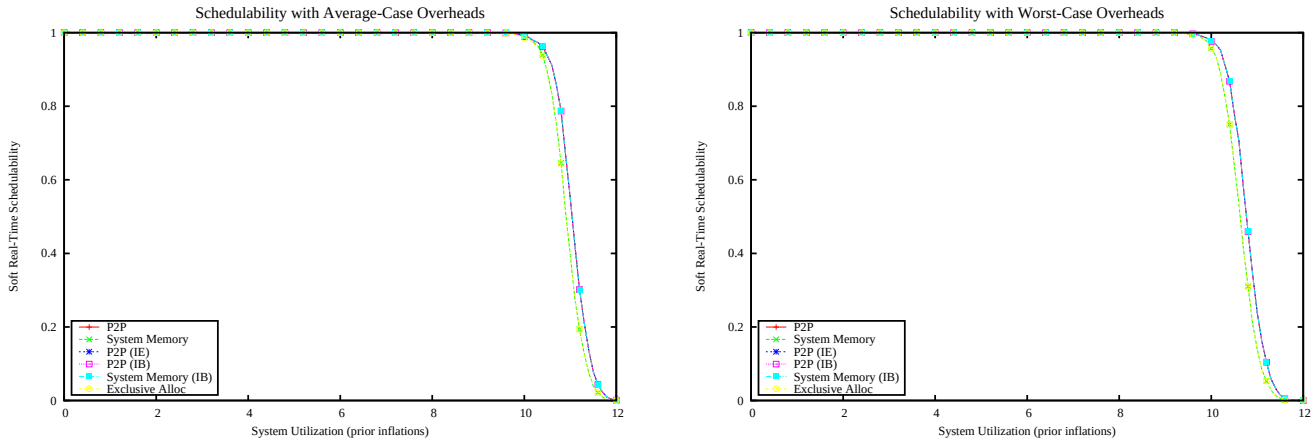

Figure 4961: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

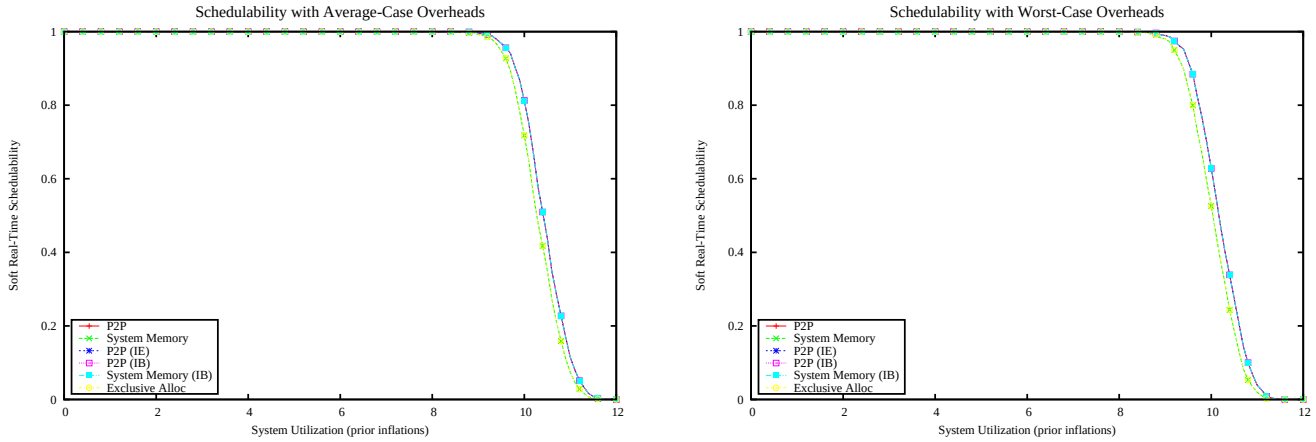

Figure 4962: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

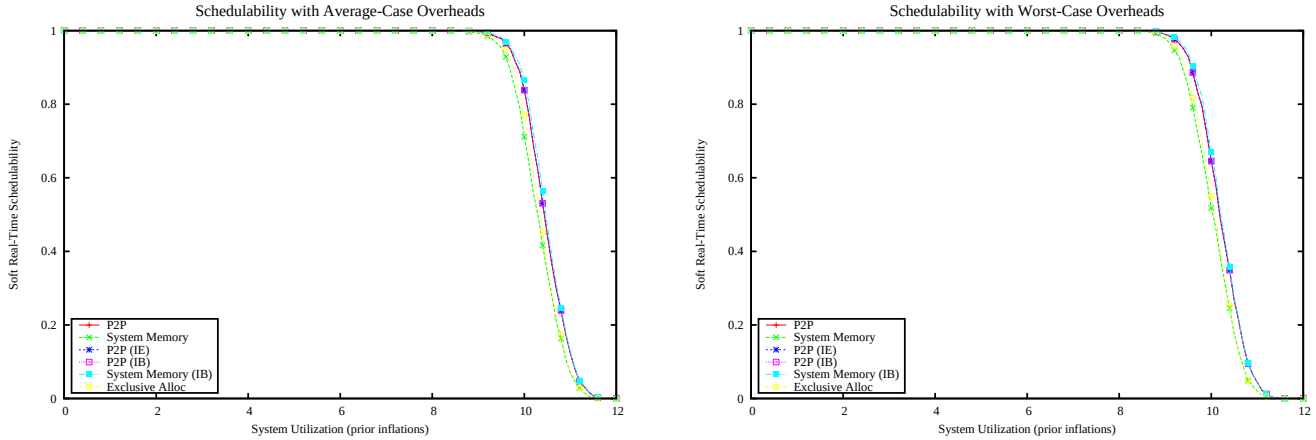

Figure 4963: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

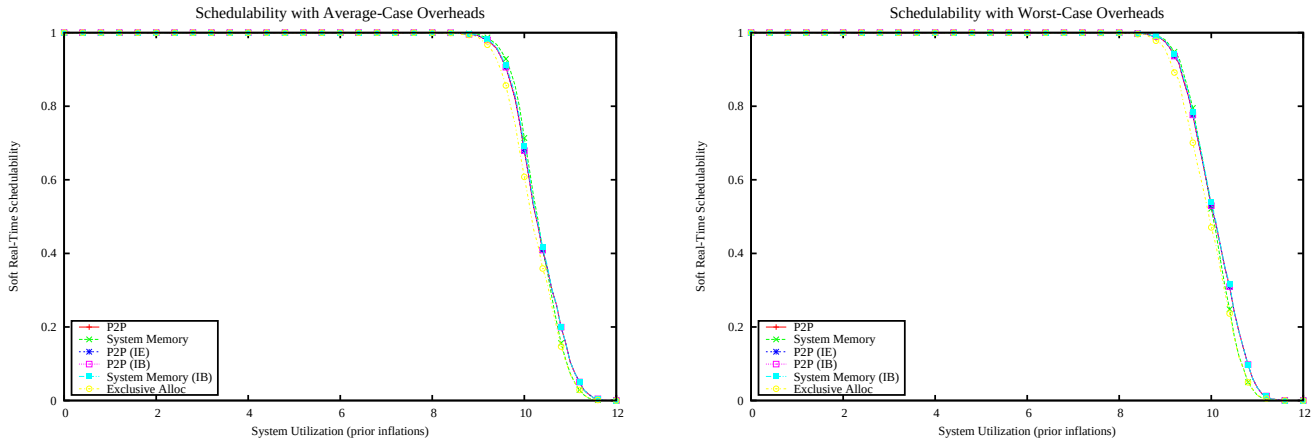

Figure 4964: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

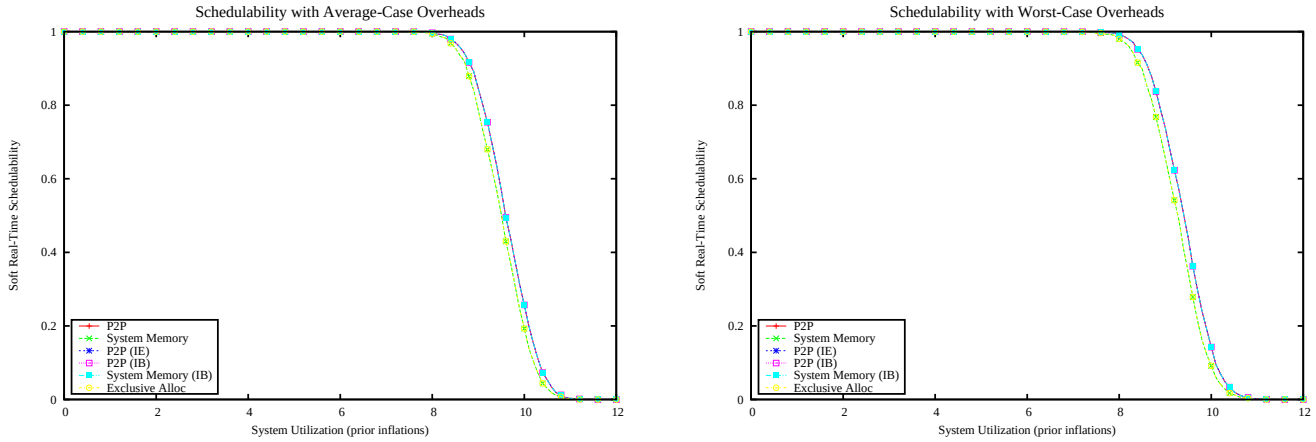

Figure 4965: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

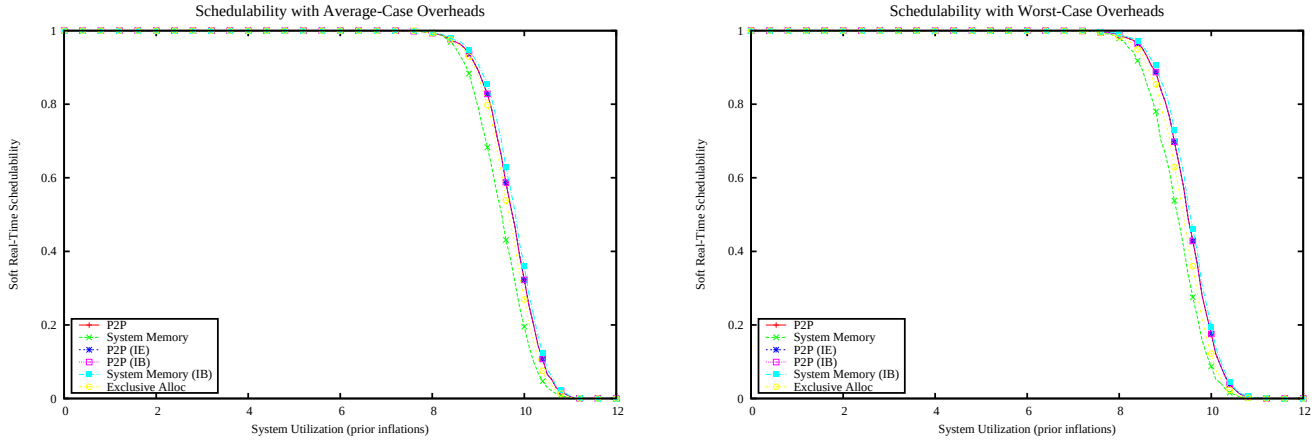

Figure 4966: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

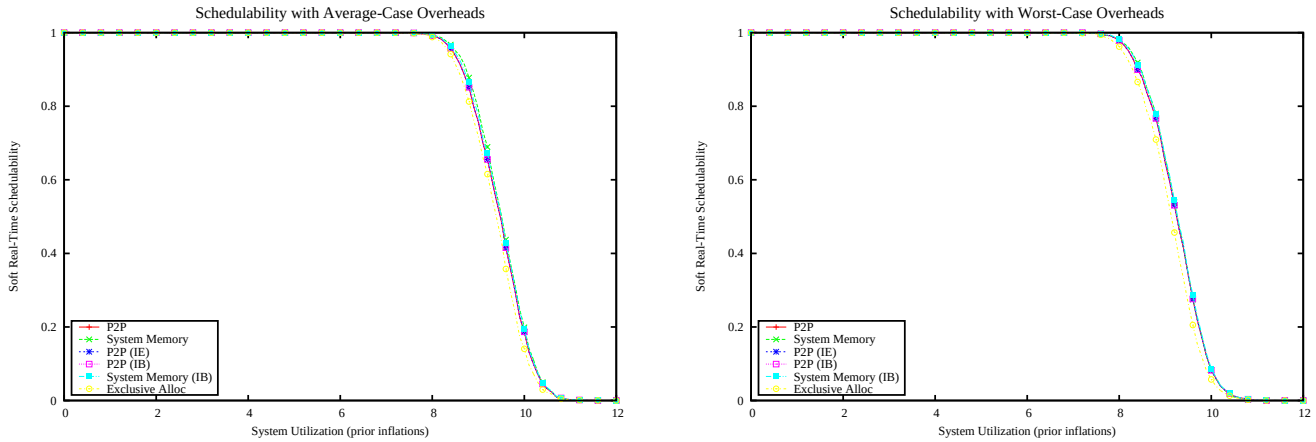

Figure 4967: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

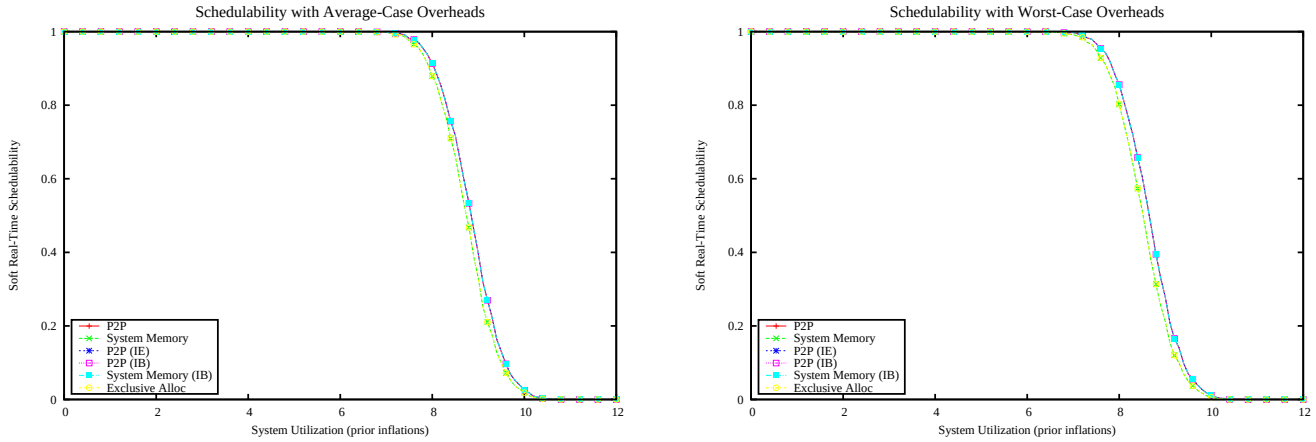

Figure 4968: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

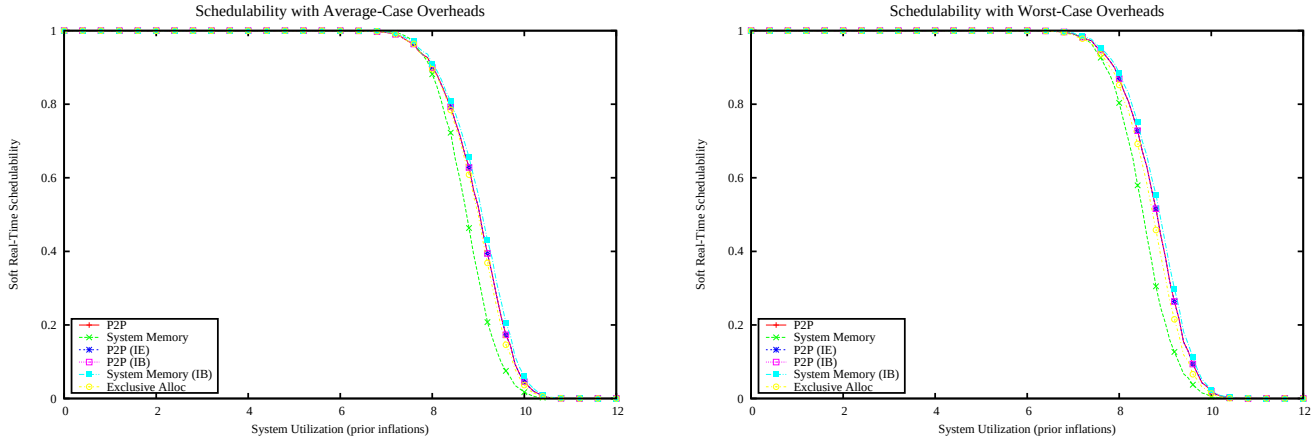

Figure 4969: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

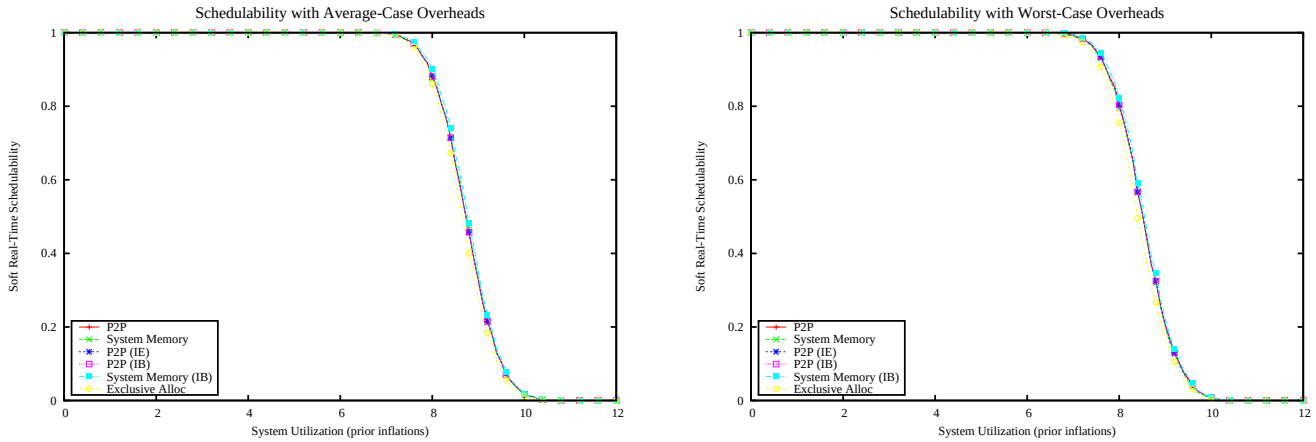

Figure 4970: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

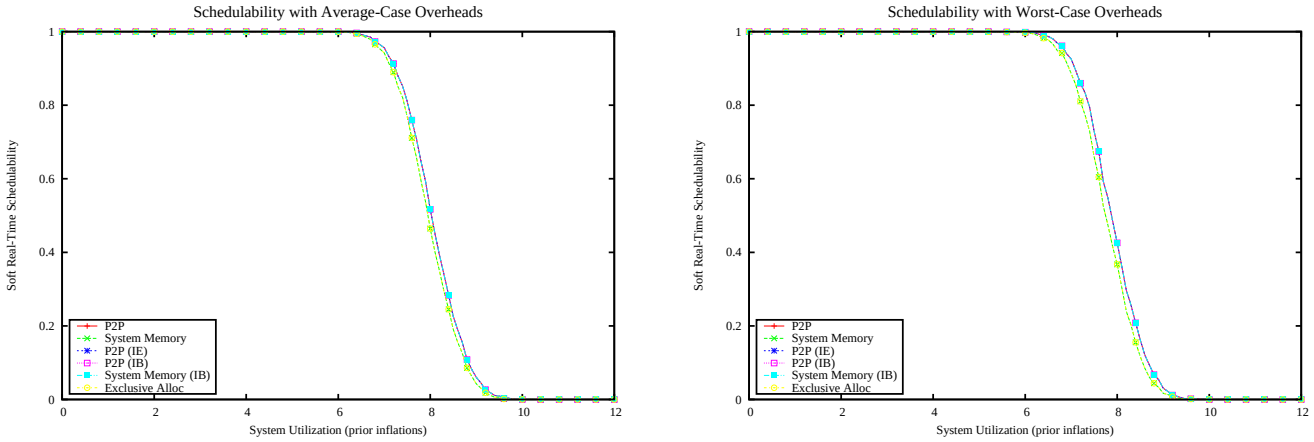

Figure 4971: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

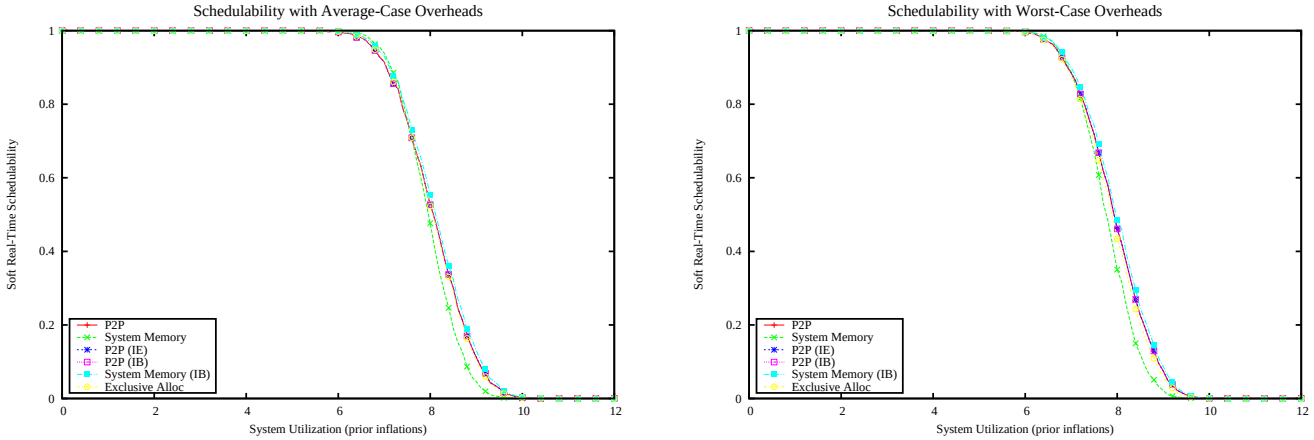

Figure 4972: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

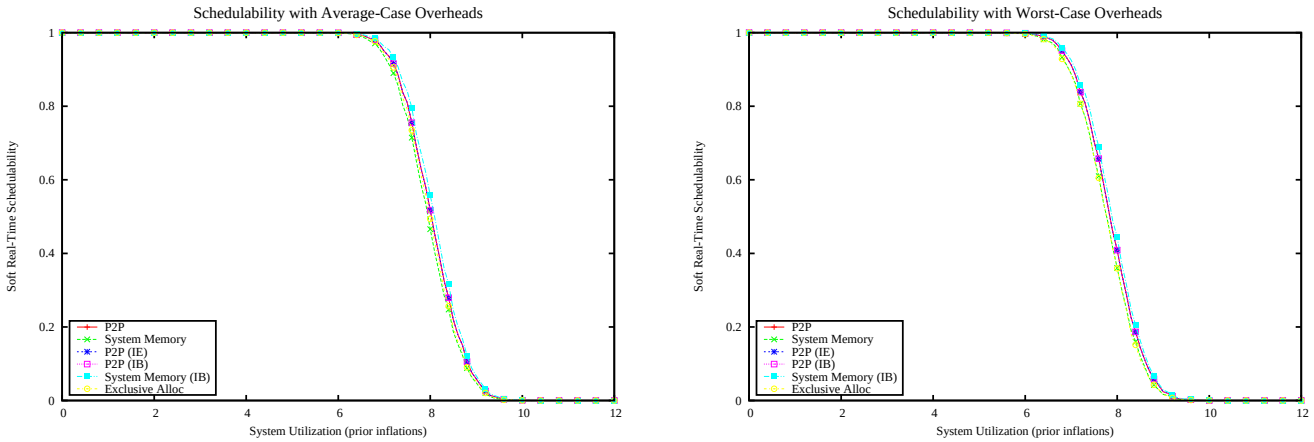

Figure 4973: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

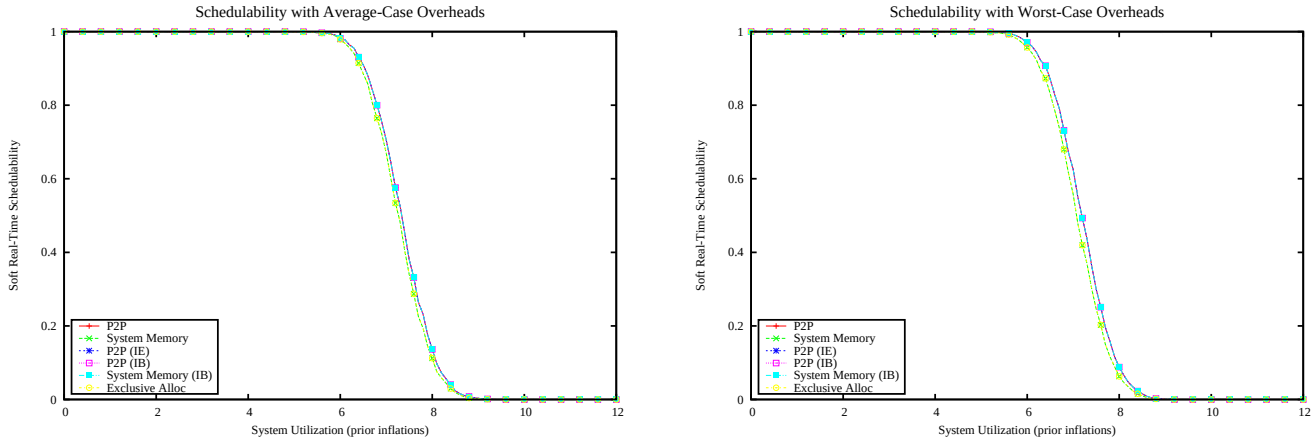

Figure 4974: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

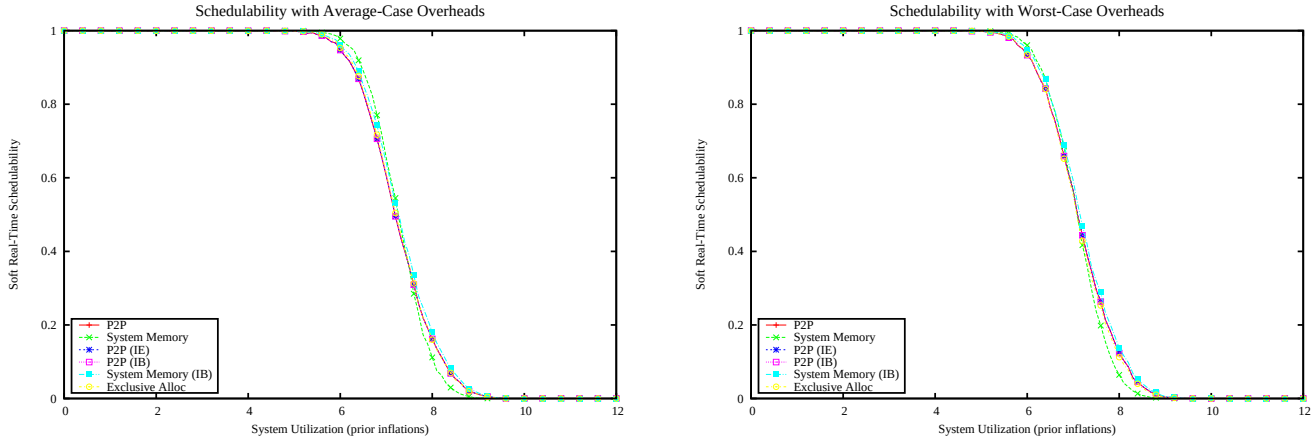

Figure 4975: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

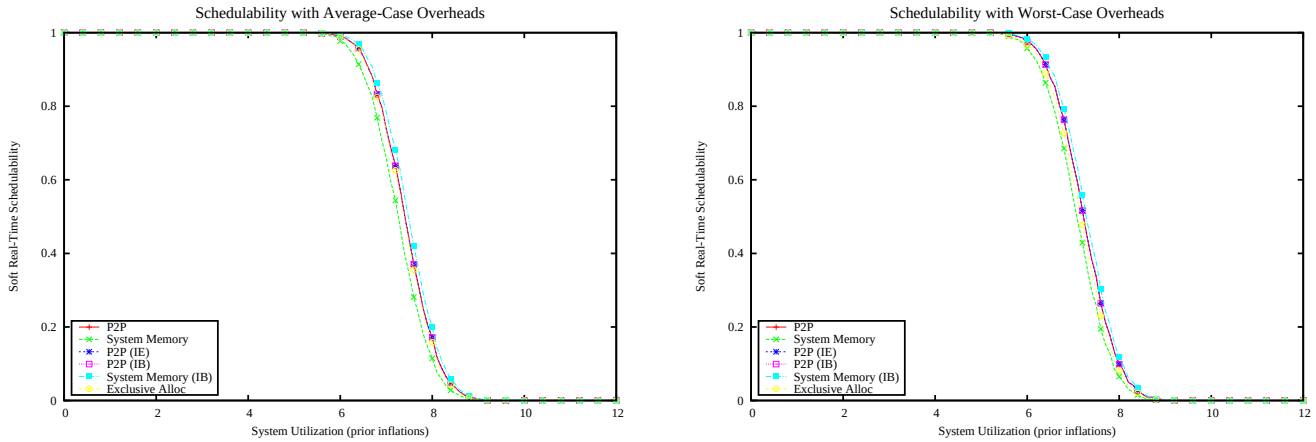

Figure 4976: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

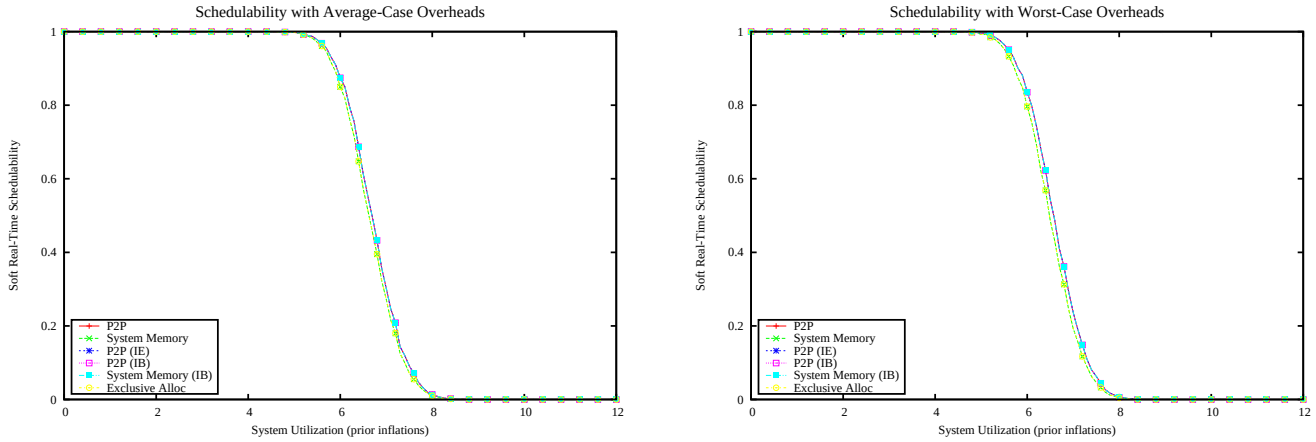

Figure 4977: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

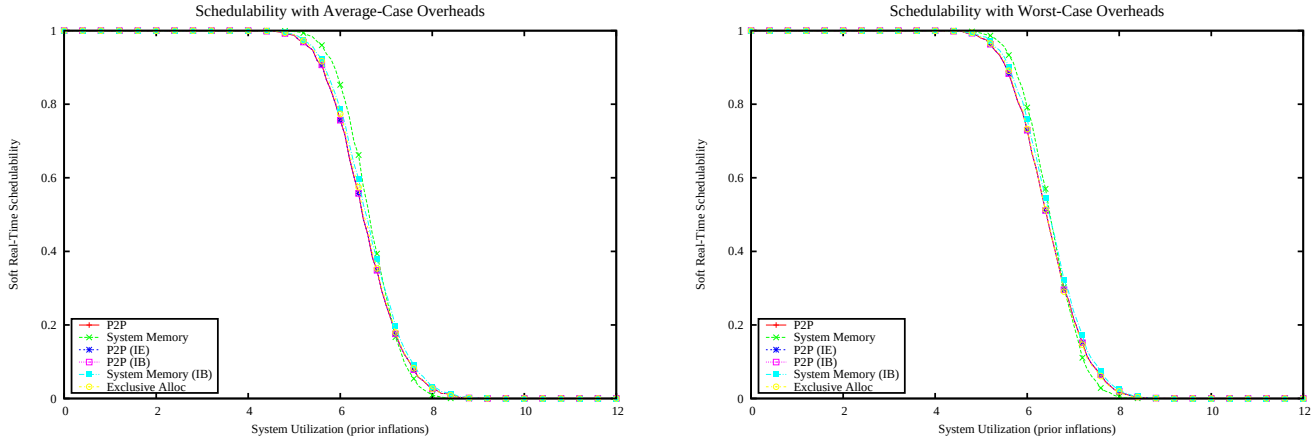

Figure 4978: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

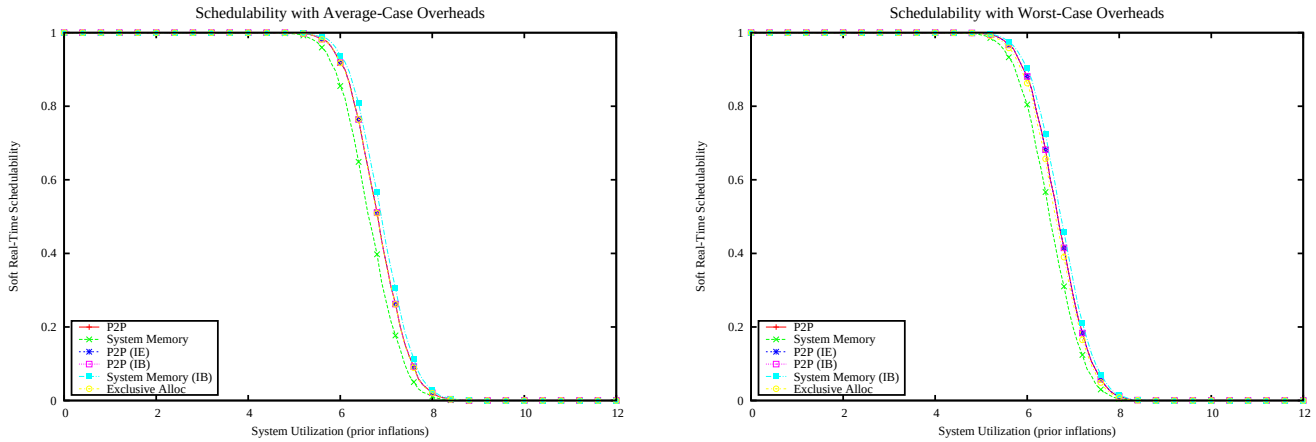

Figure 4979: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

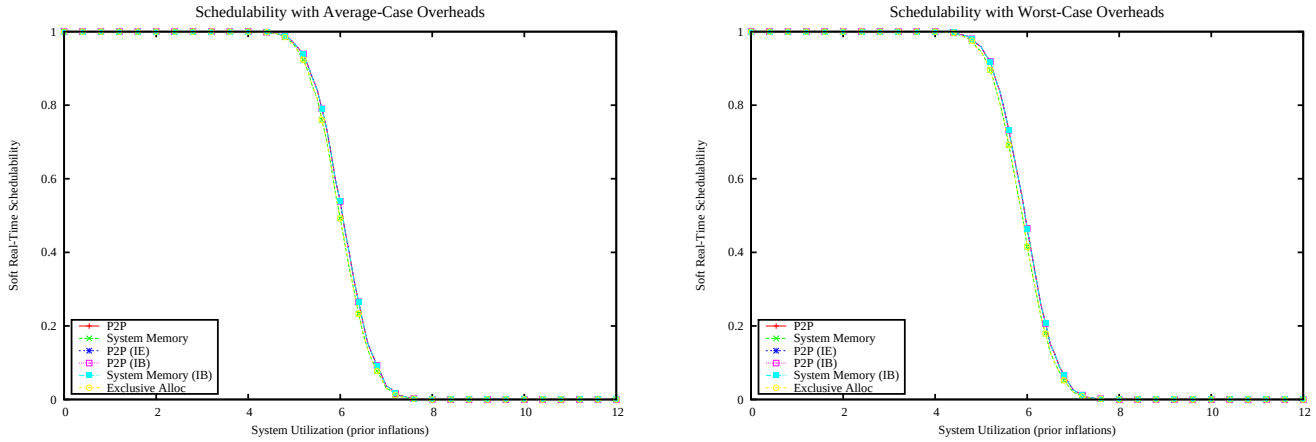

Figure 4980: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

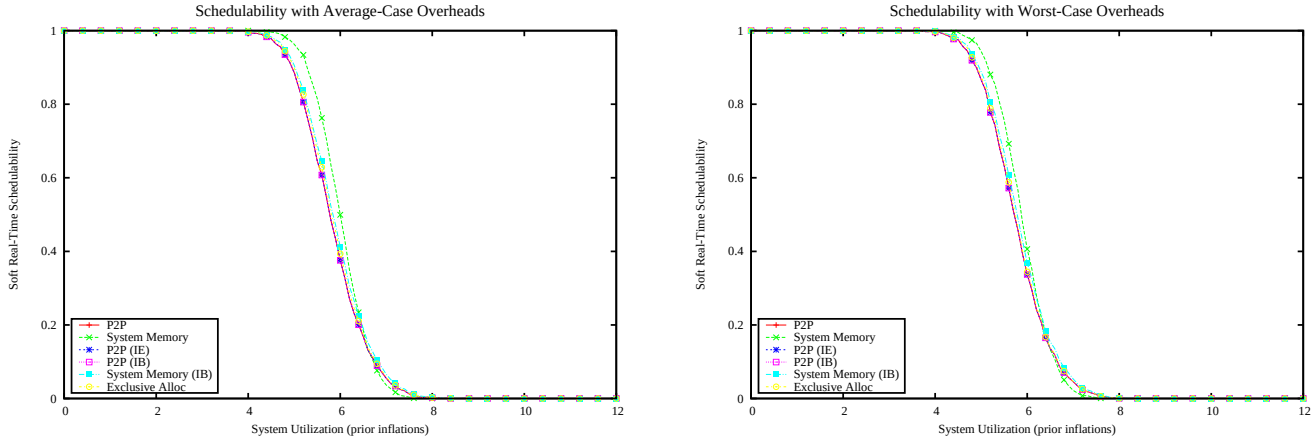

Figure 4981: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

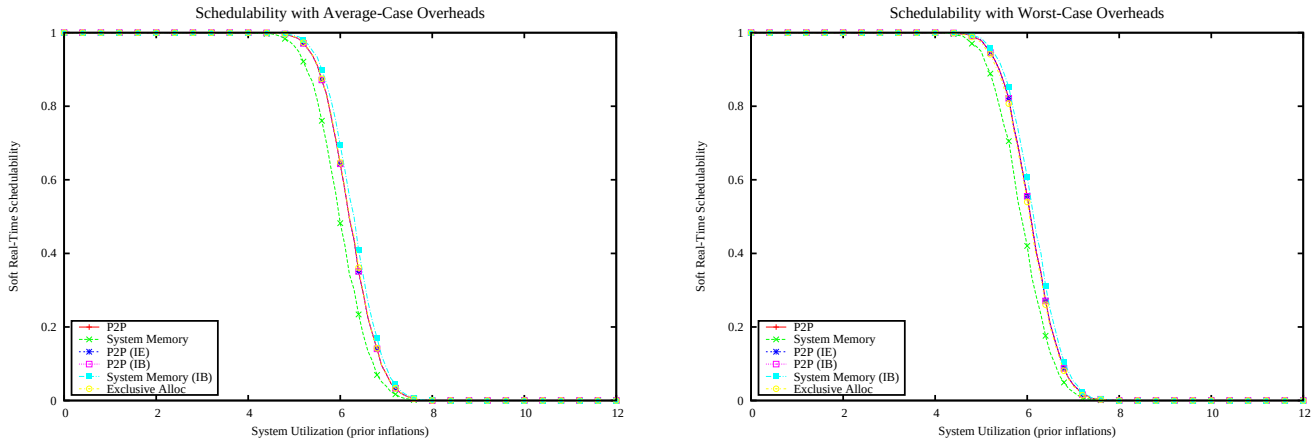

Figure 4982: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

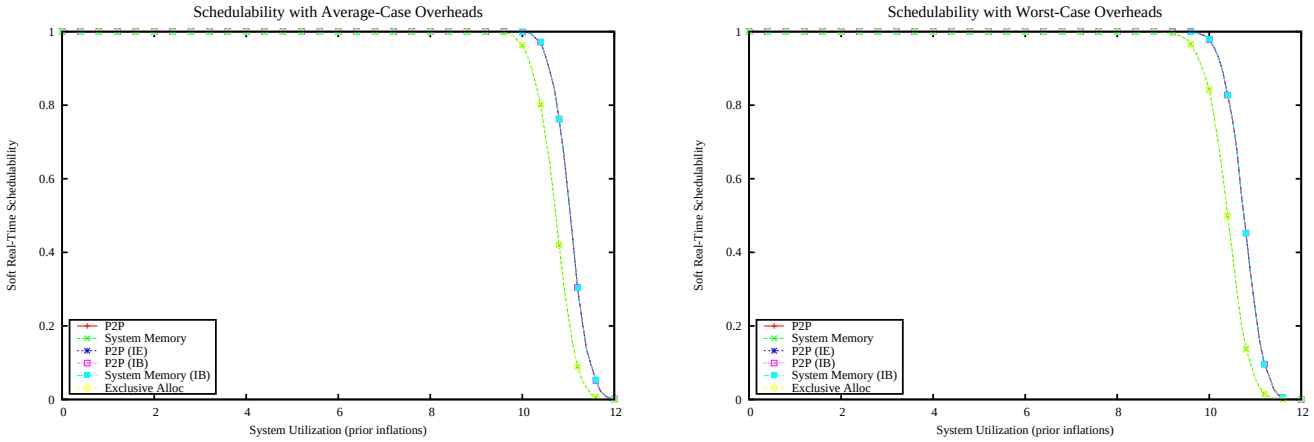

Figure 4983: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

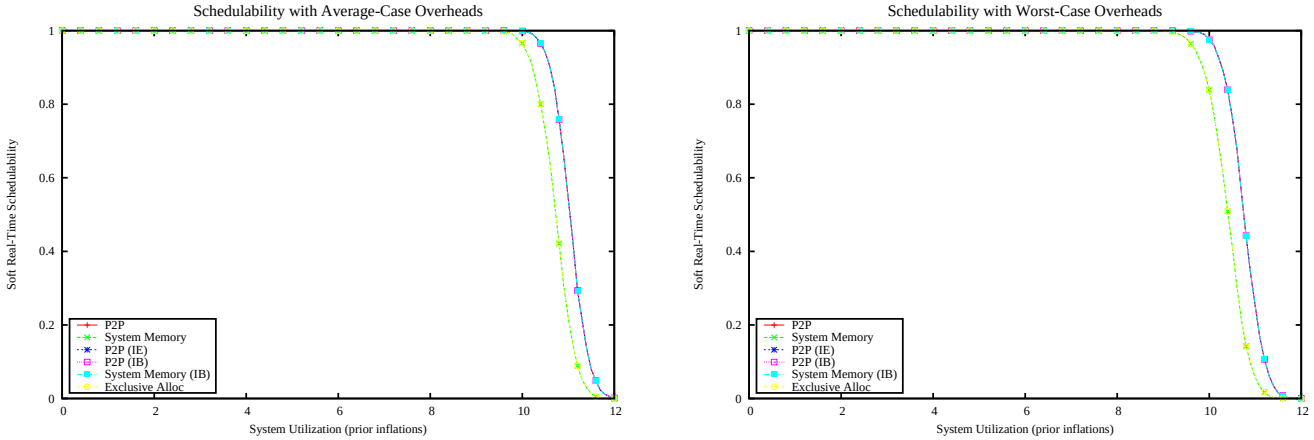

Figure 4984: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

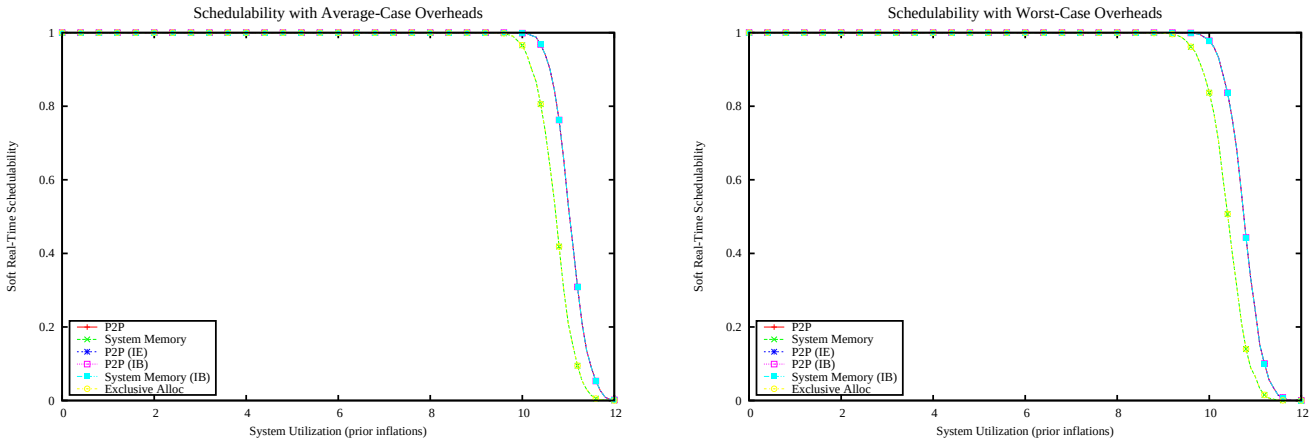

Figure 4985: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

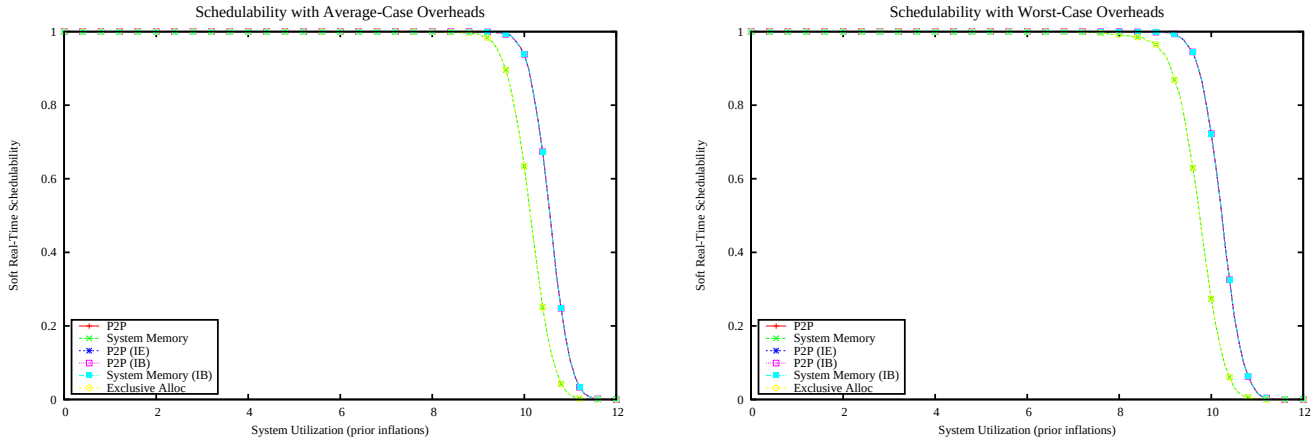

Figure 4986: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

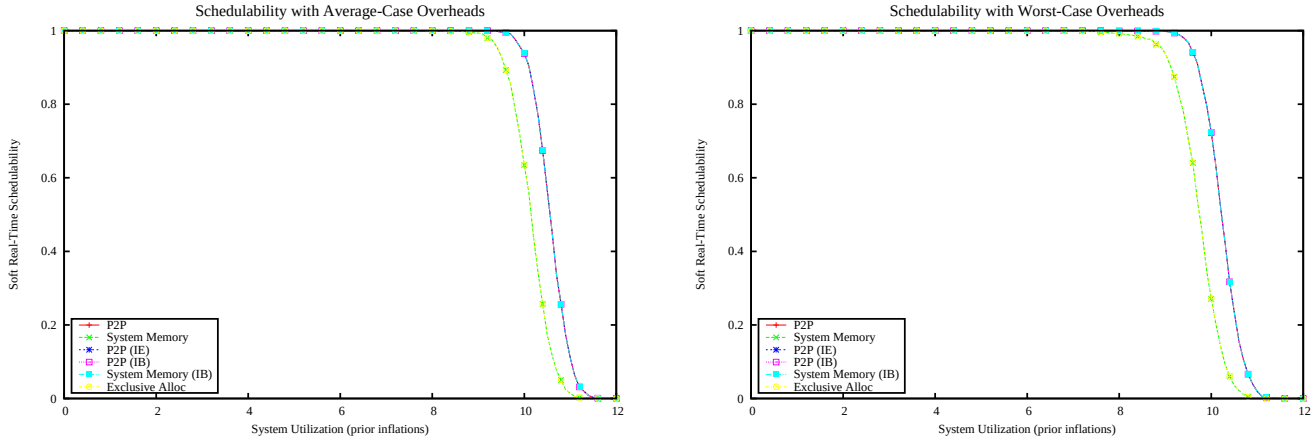

Figure 4987: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

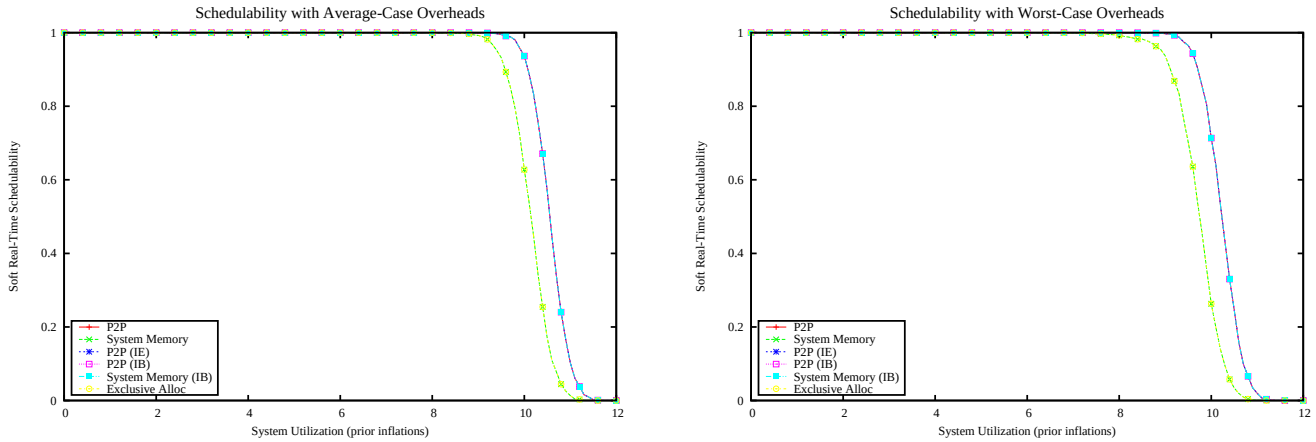

Figure 4988: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

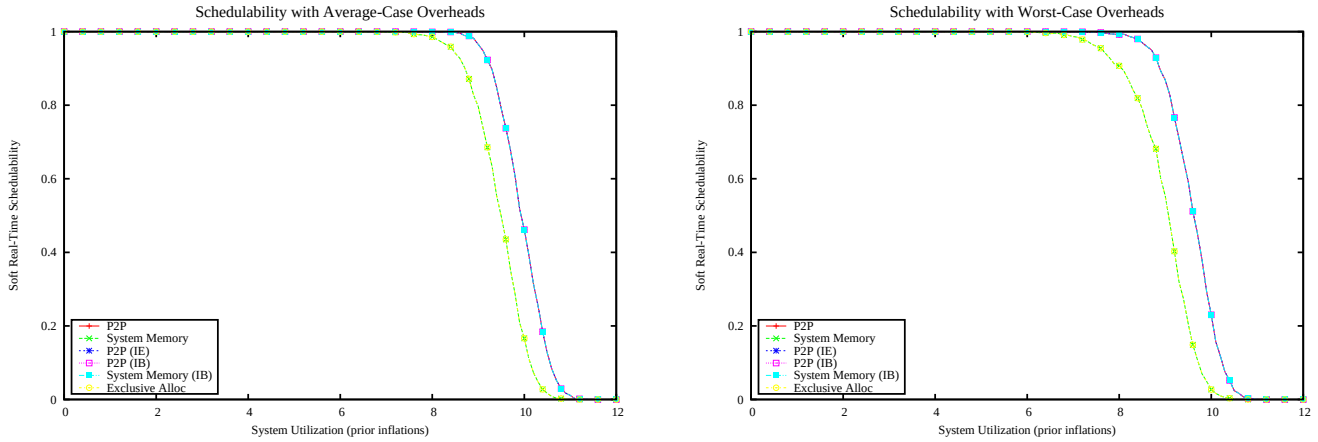

Figure 4989: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

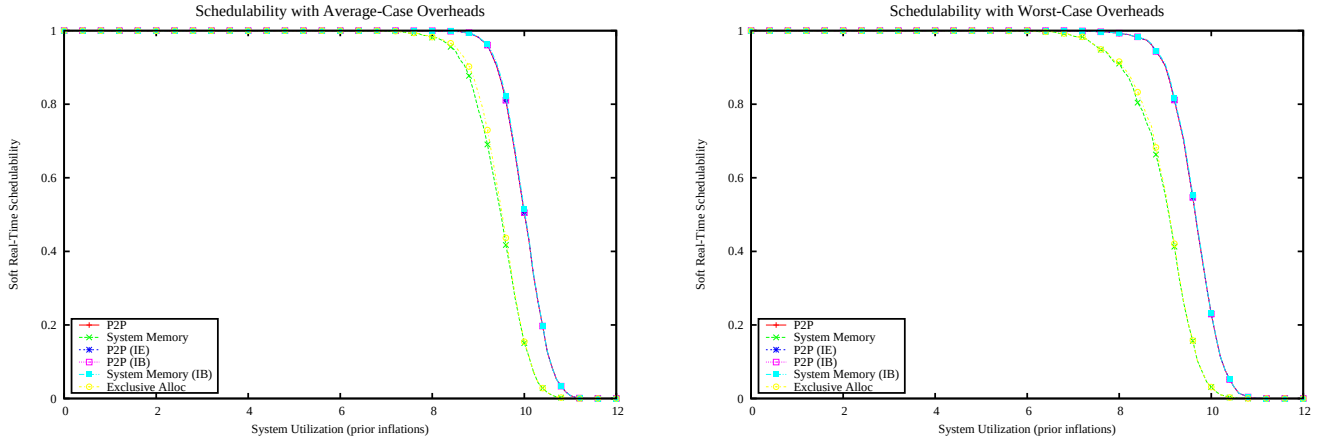

Figure 4990: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

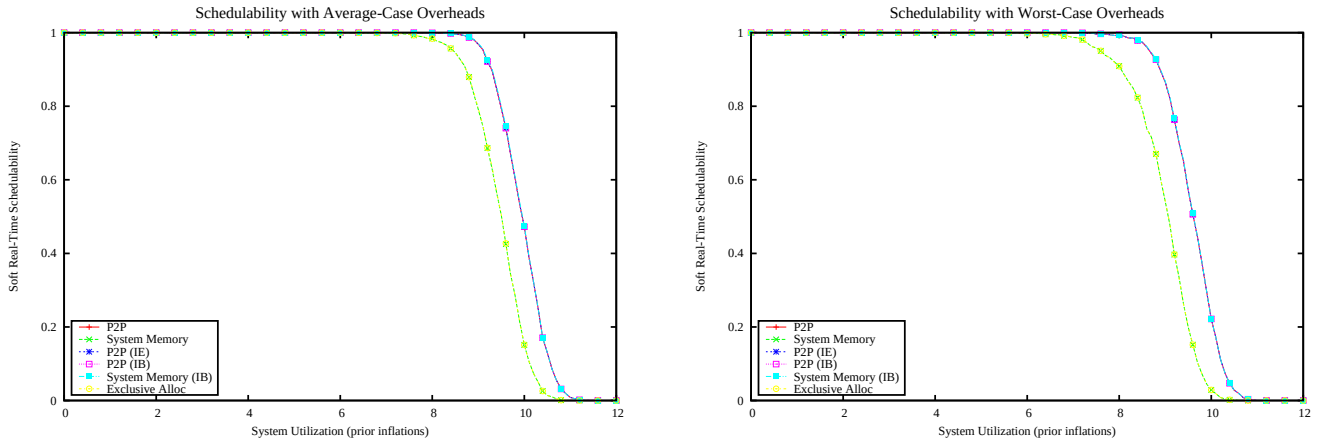

Figure 4991: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

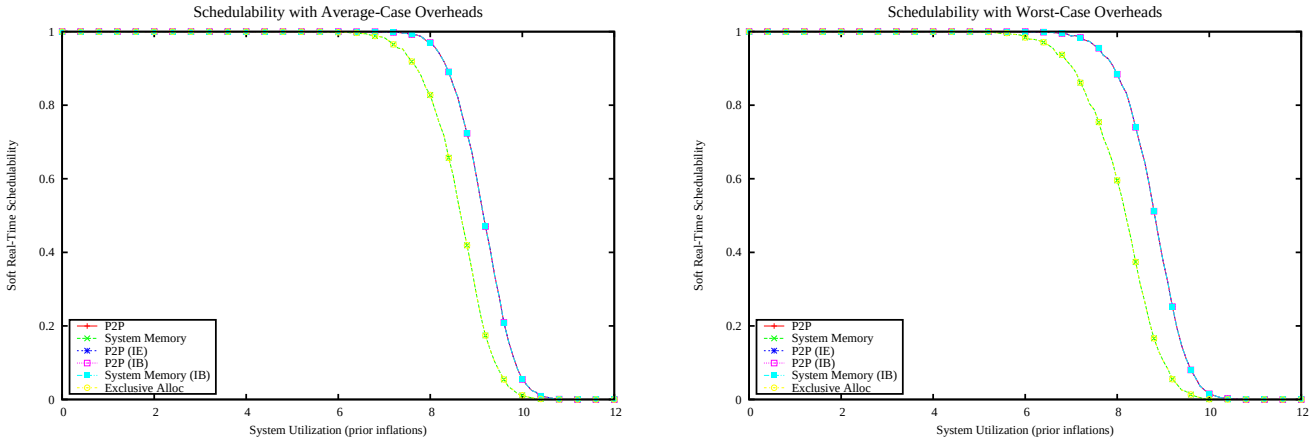

Figure 4992: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

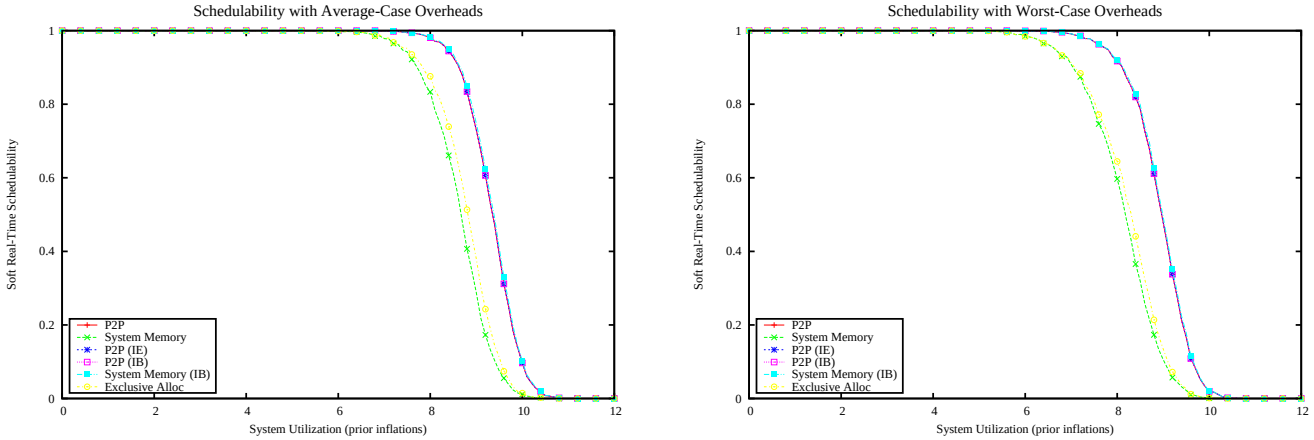

Figure 4993: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

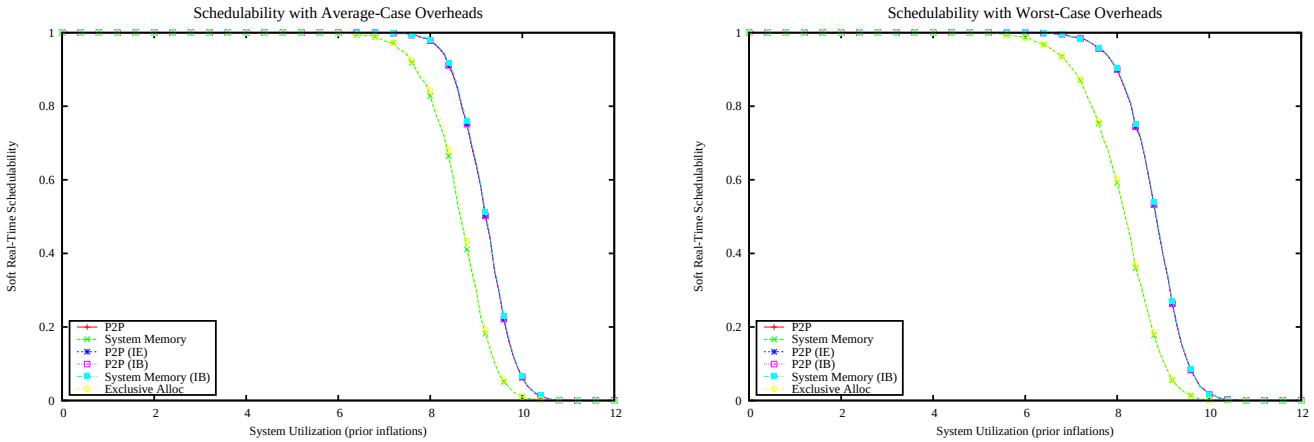

Figure 4994: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

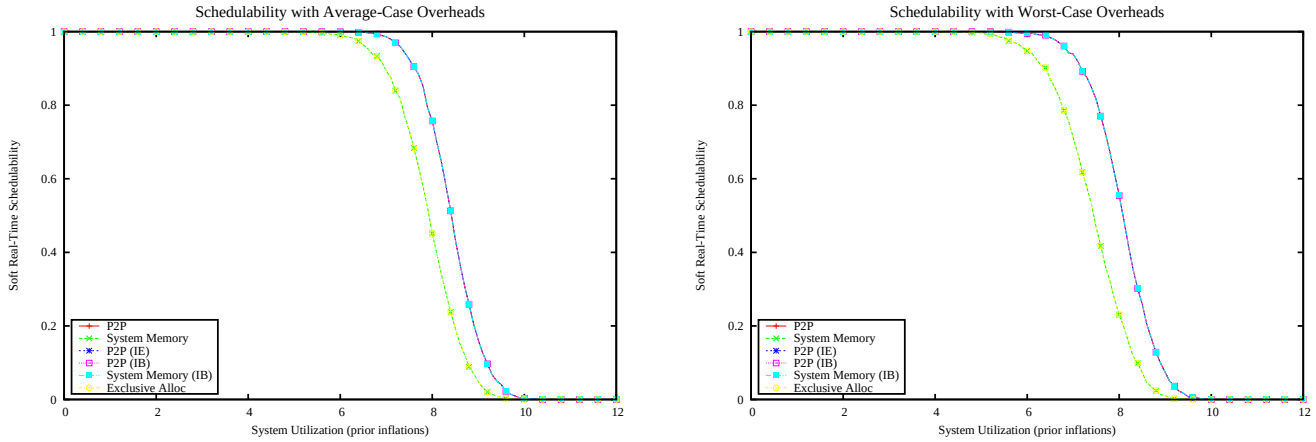

Figure 4995: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

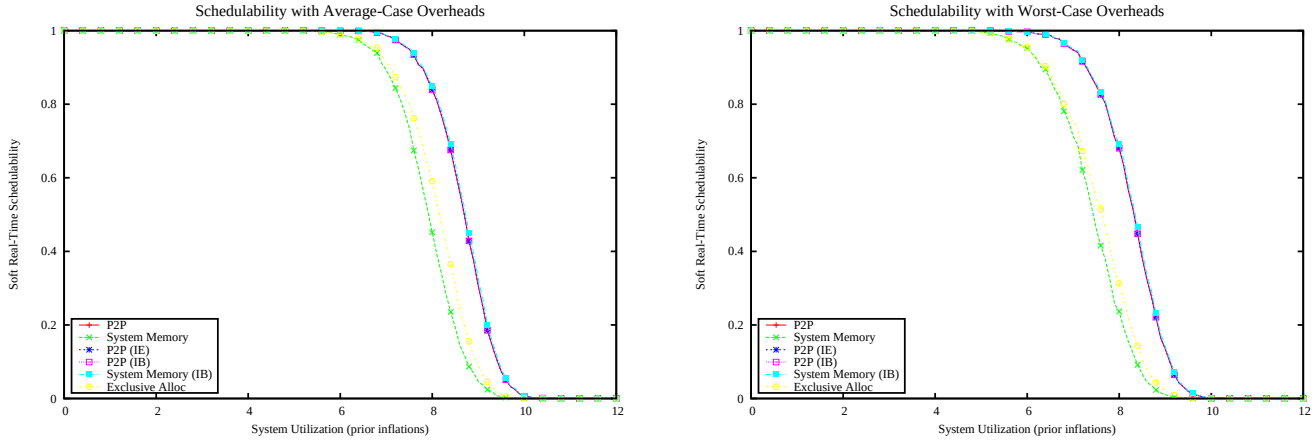

Figure 4996: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

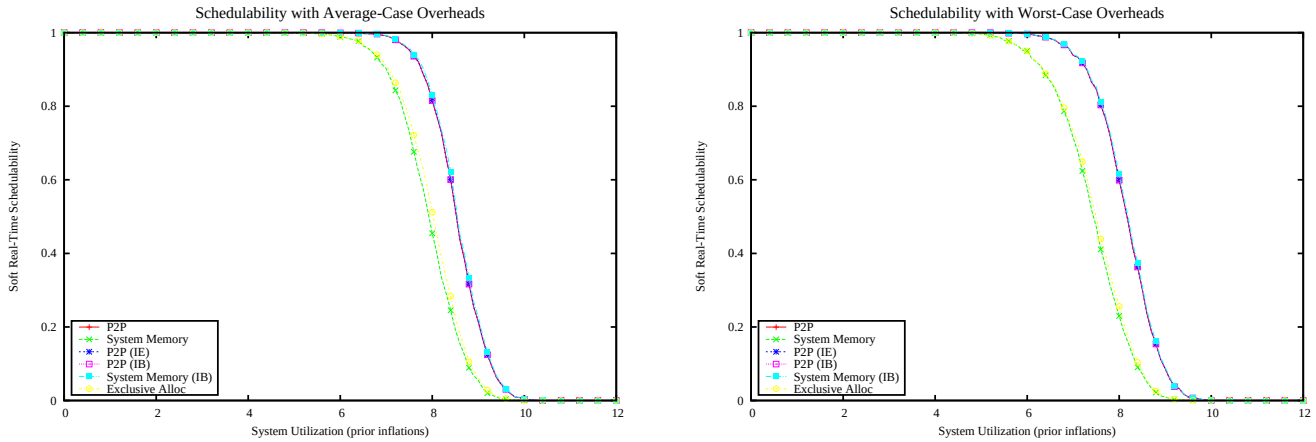

Figure 4997: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

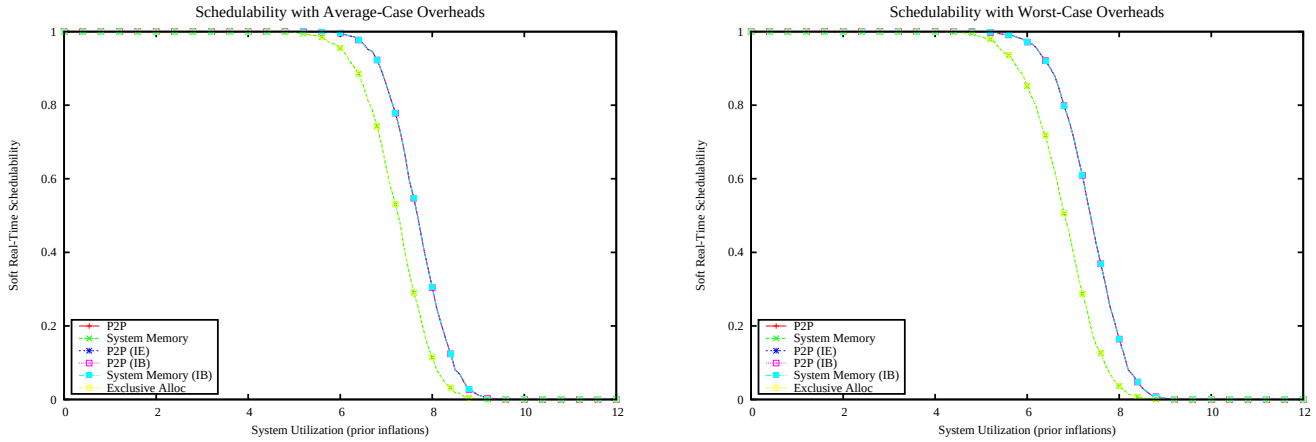

Figure 4998: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

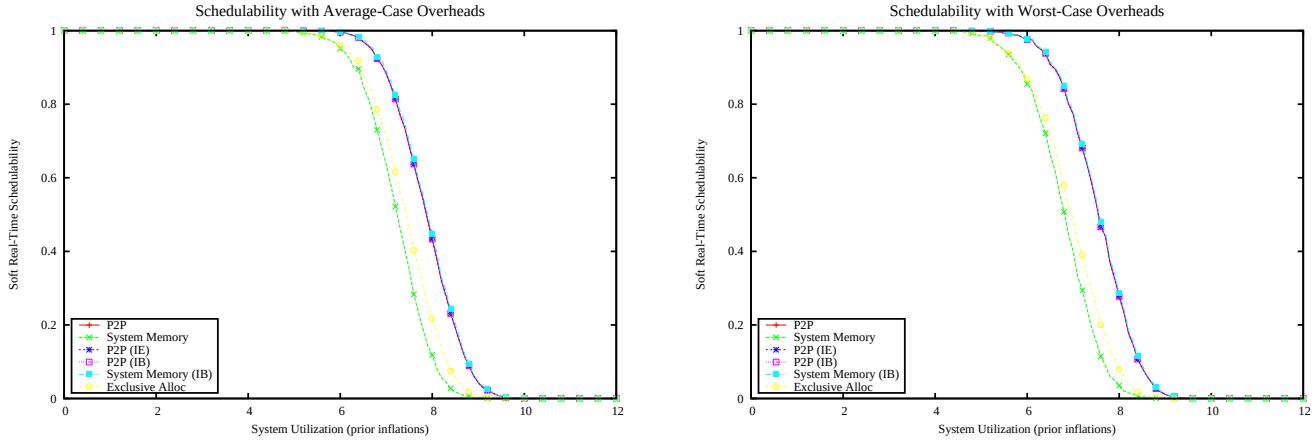

Figure 4999: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

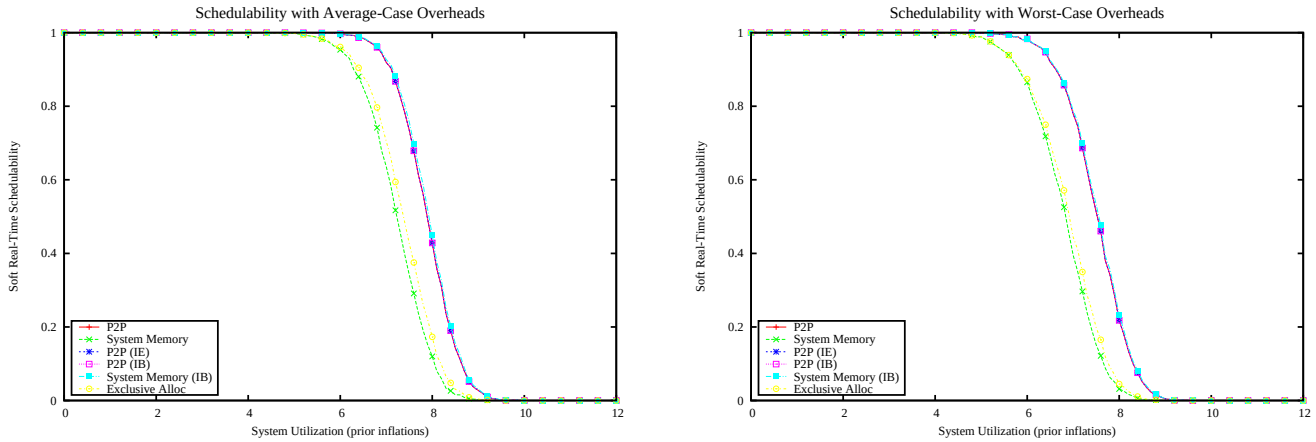

Figure 5000: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

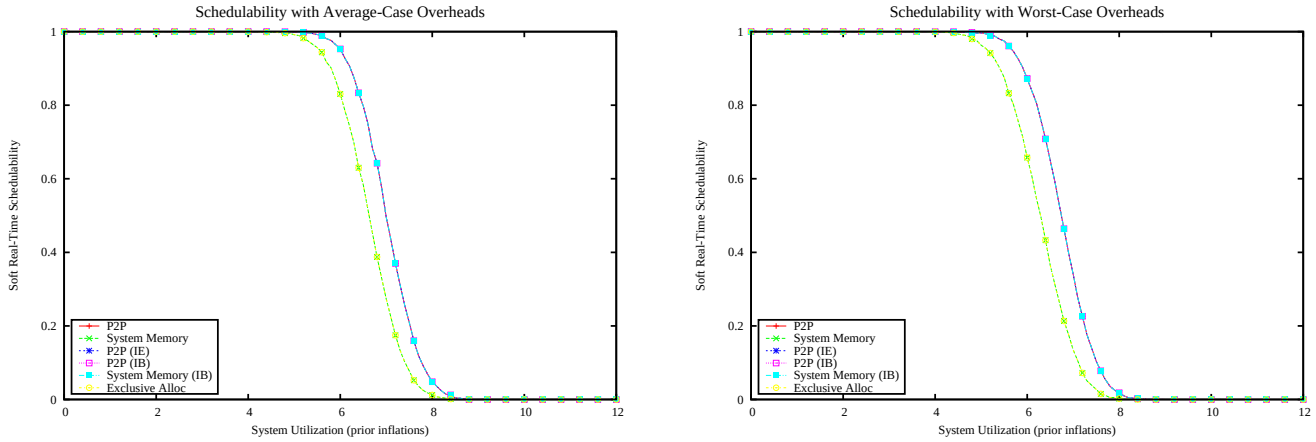

Figure 5001: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

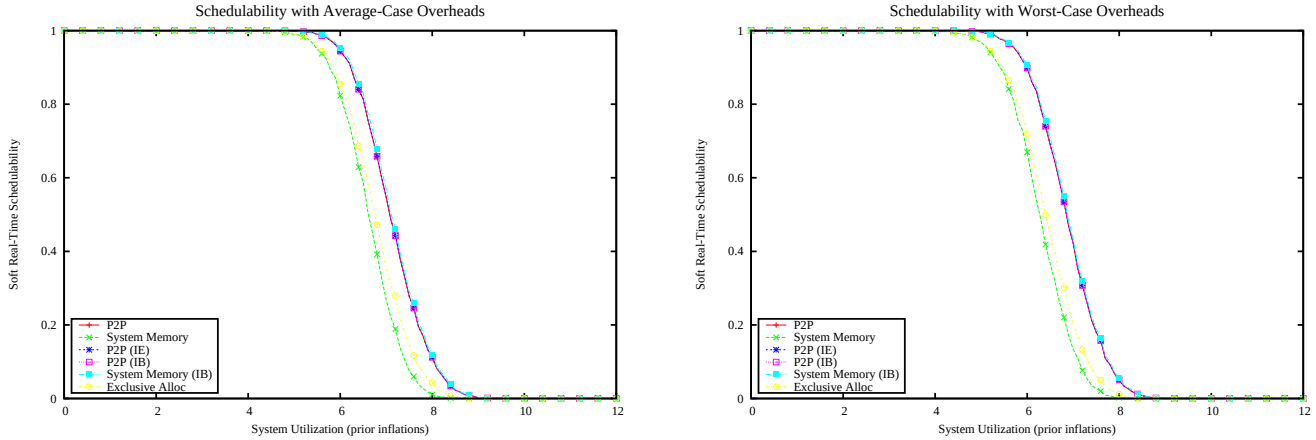

Figure 5002: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

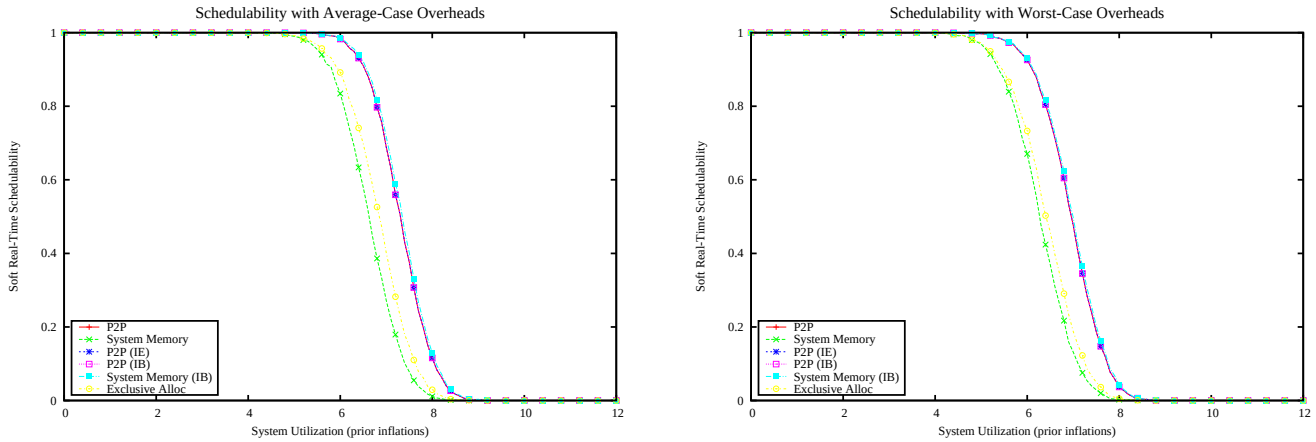

Figure 5003: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

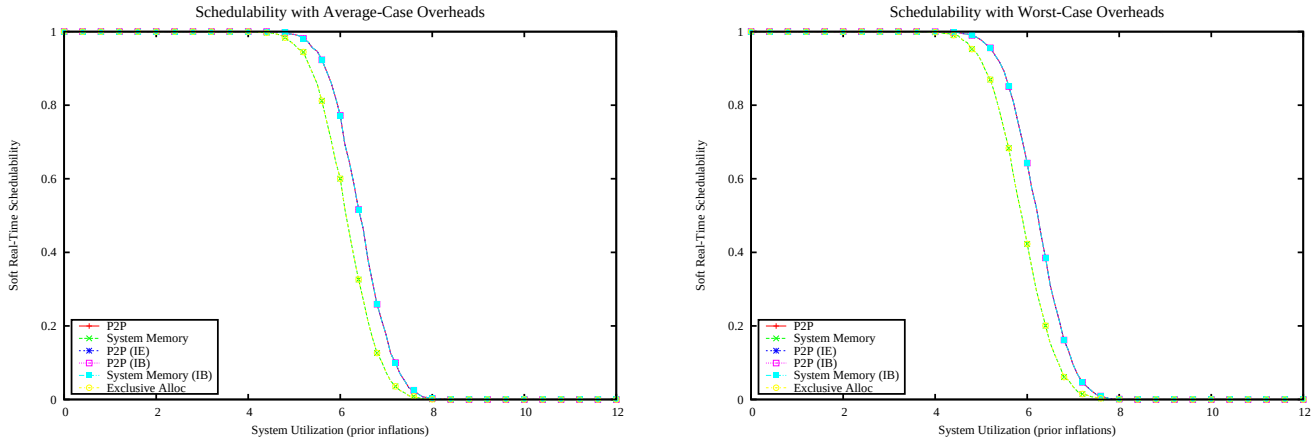

Figure 5004: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

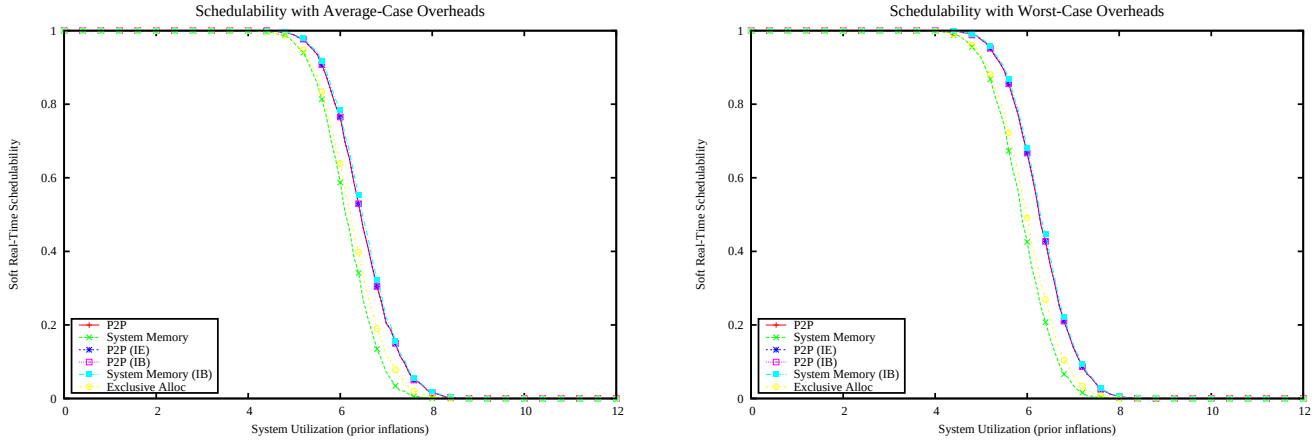

Figure 5005: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

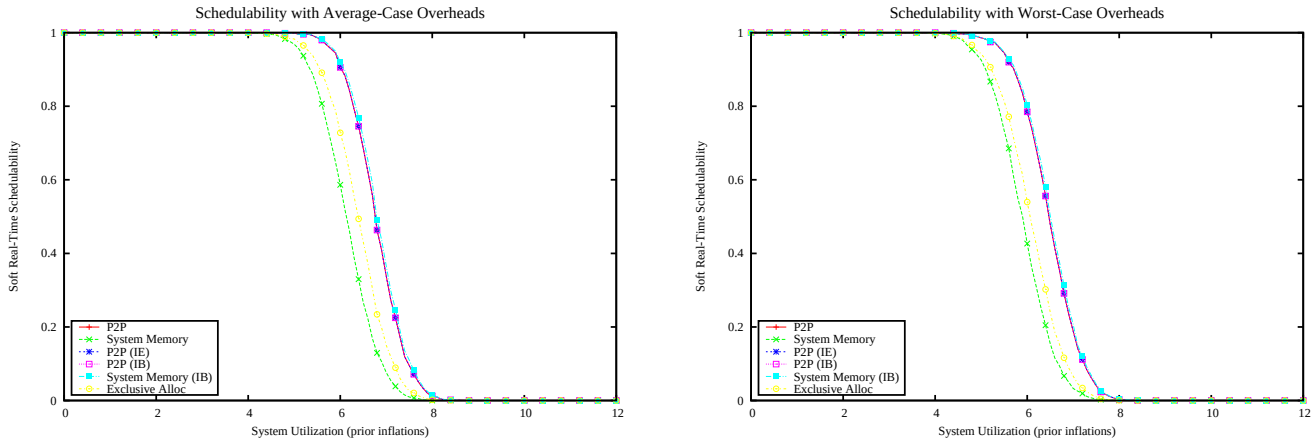

Figure 5006: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

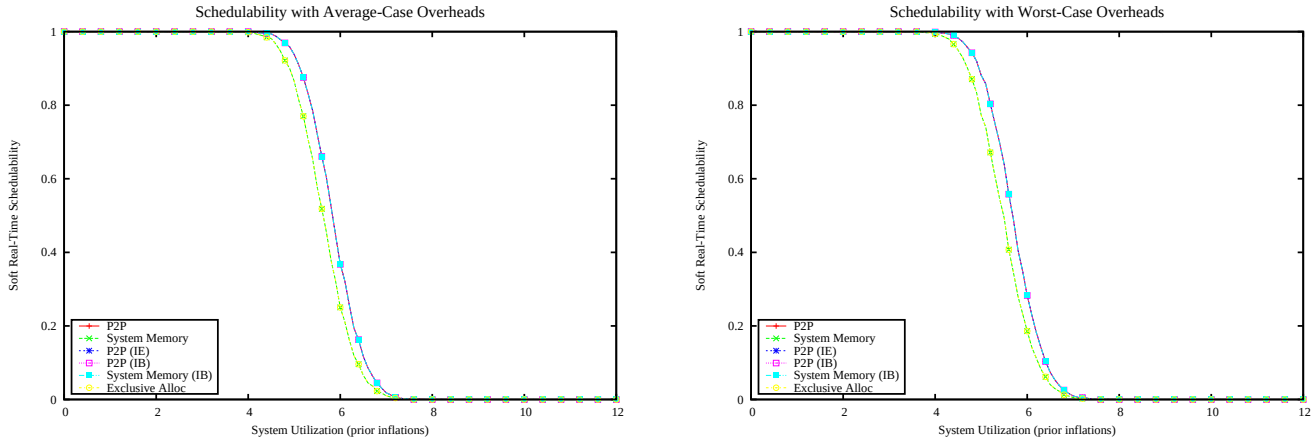

Figure 5007: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

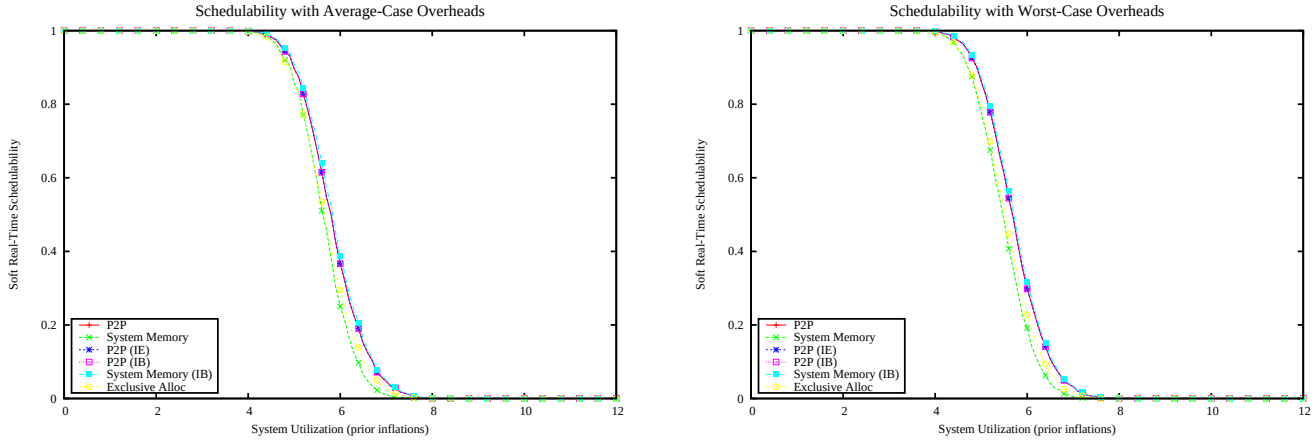

Figure 5008: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

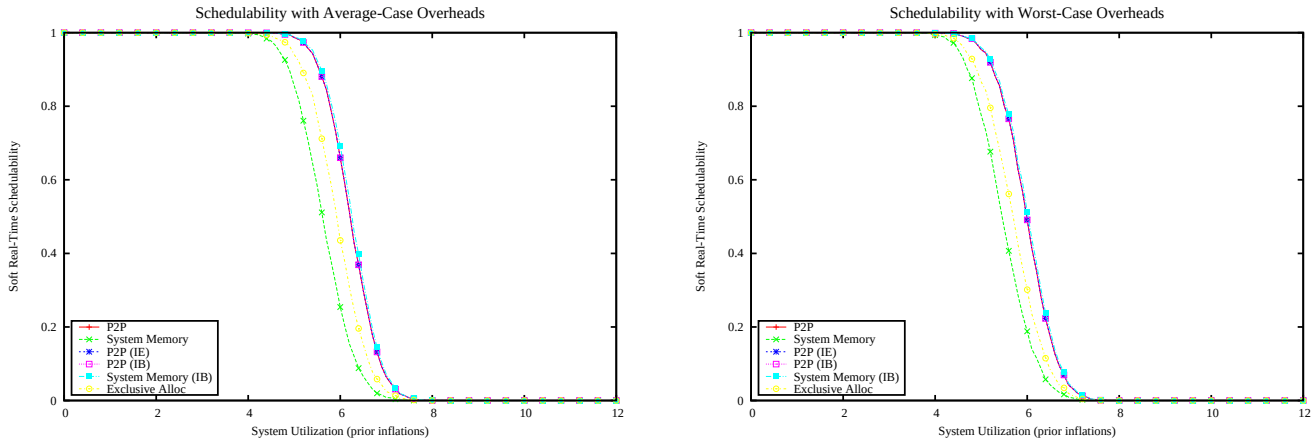

Figure 5009: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

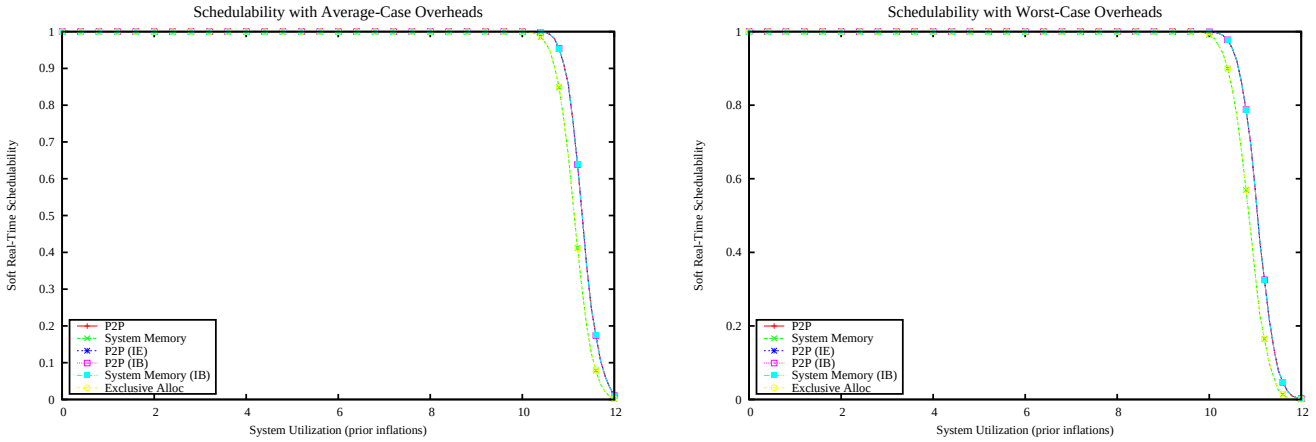

Figure 5010: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

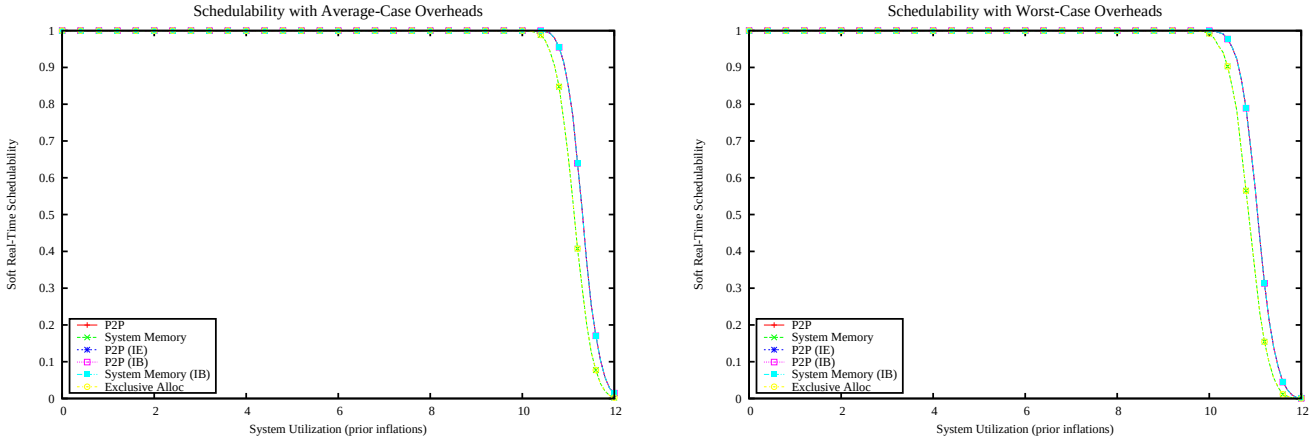

Figure 5011: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

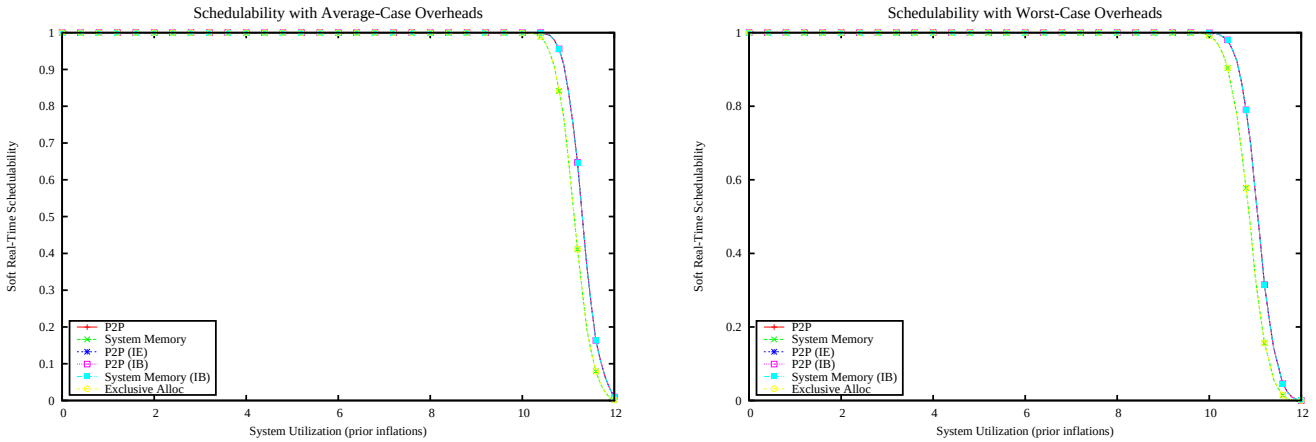

Figure 5012: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

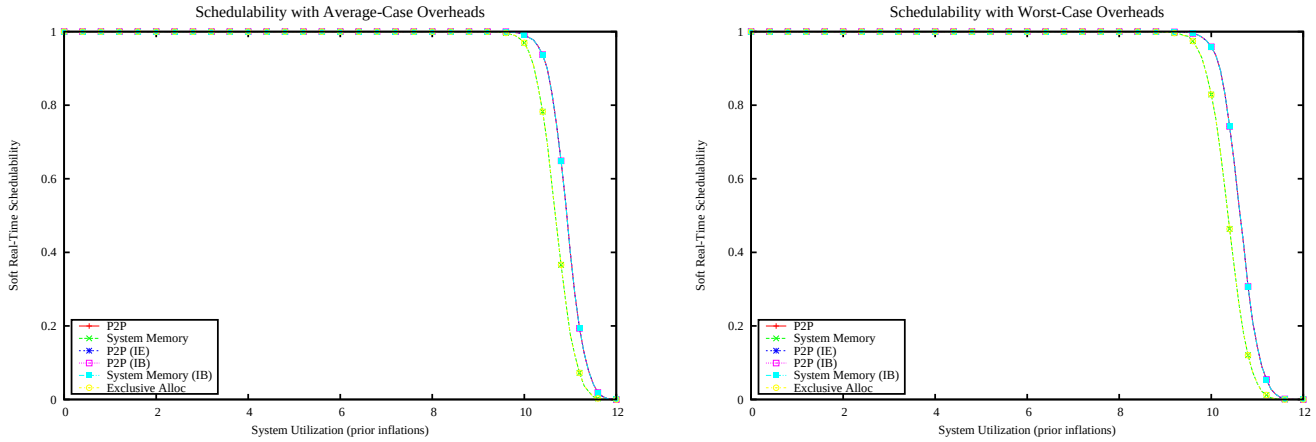

Figure 5013: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

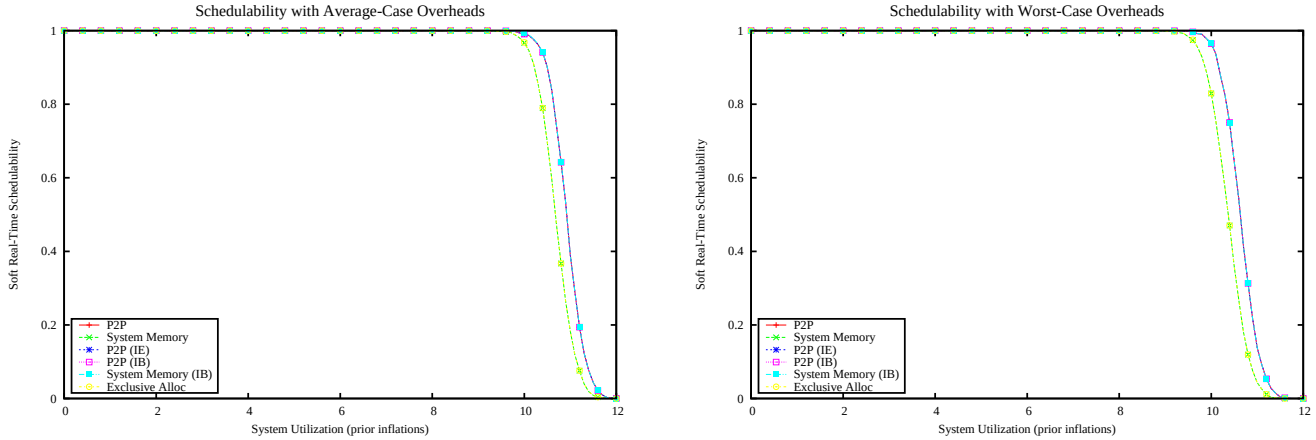

Figure 5014: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

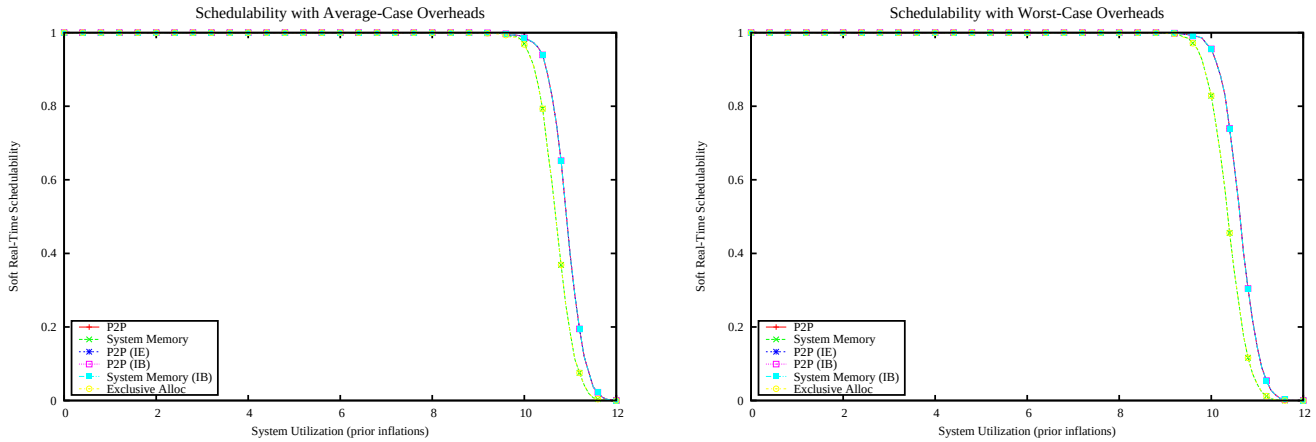

Figure 5015: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

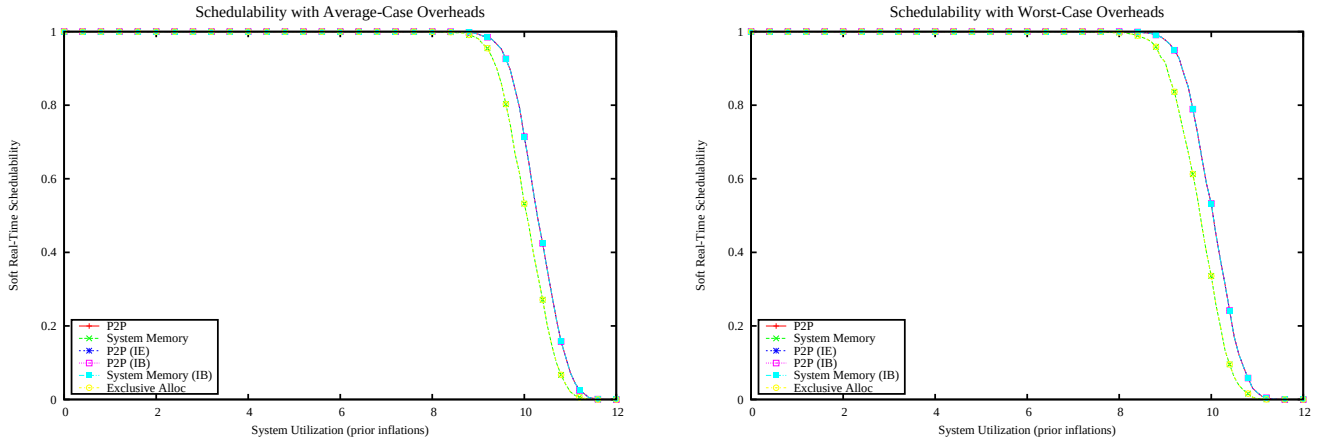

Figure 5016: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

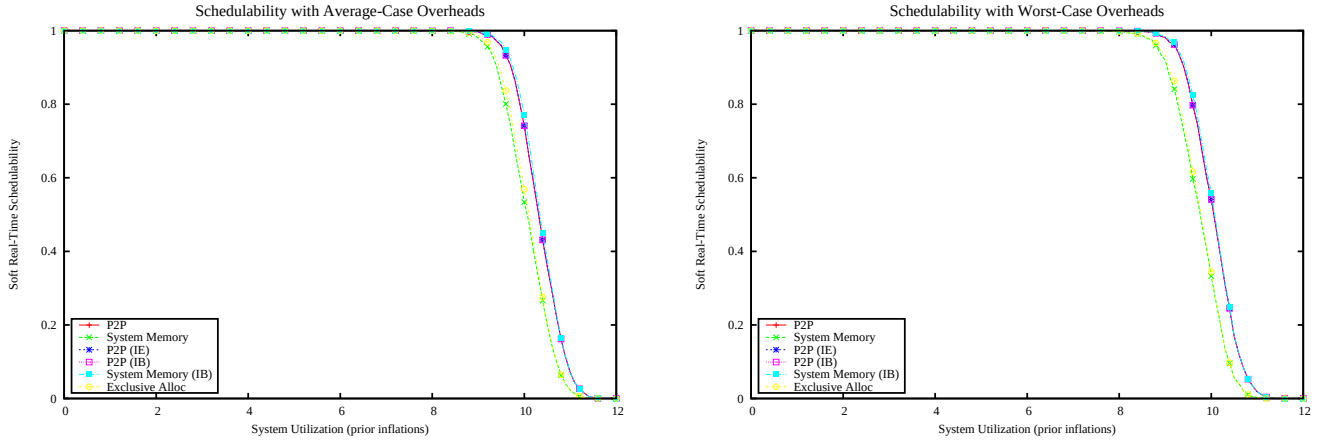

Figure 5017: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

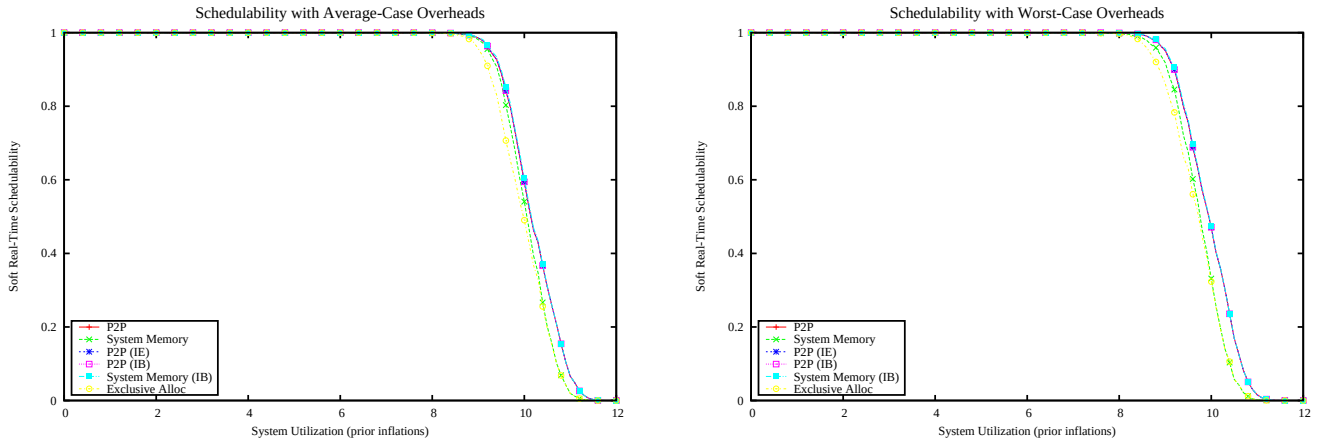

Figure 5018: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

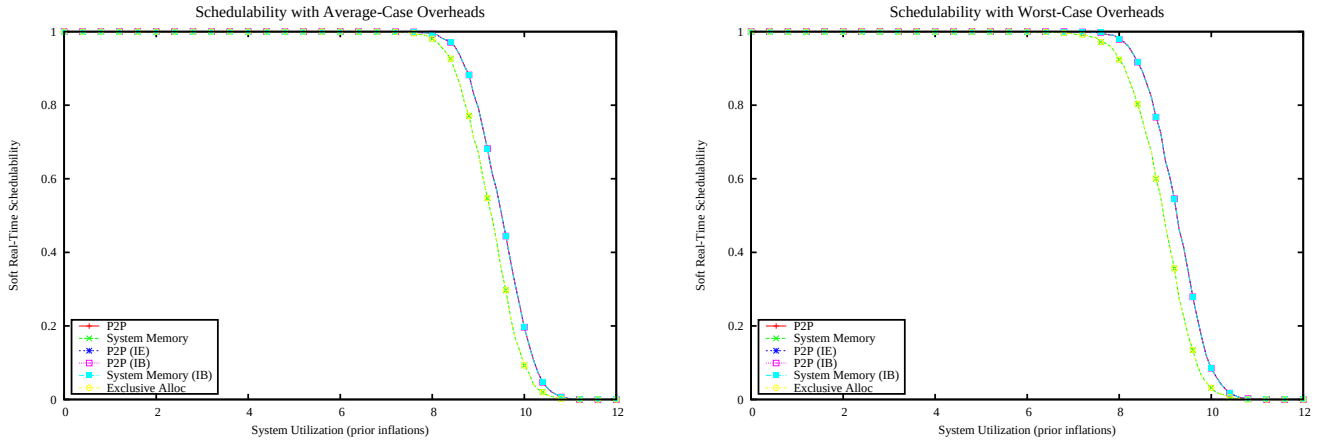

Figure 5019: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

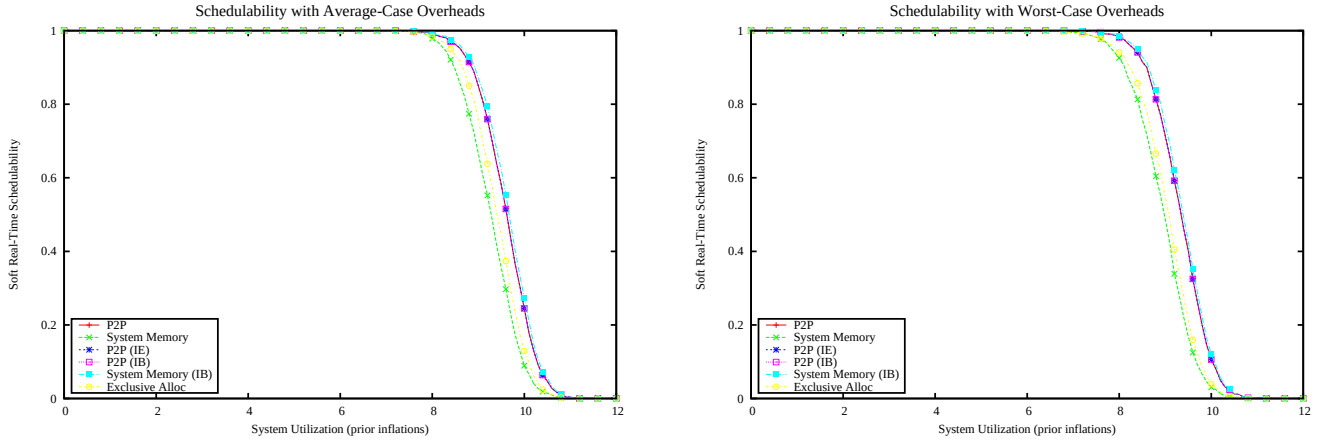

Figure 5020: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

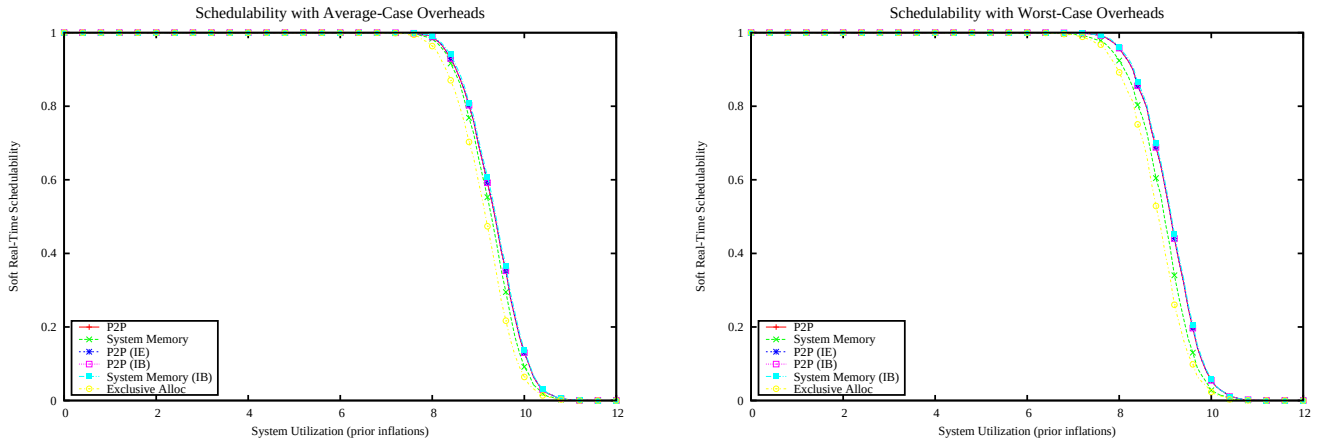

Figure 5021: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

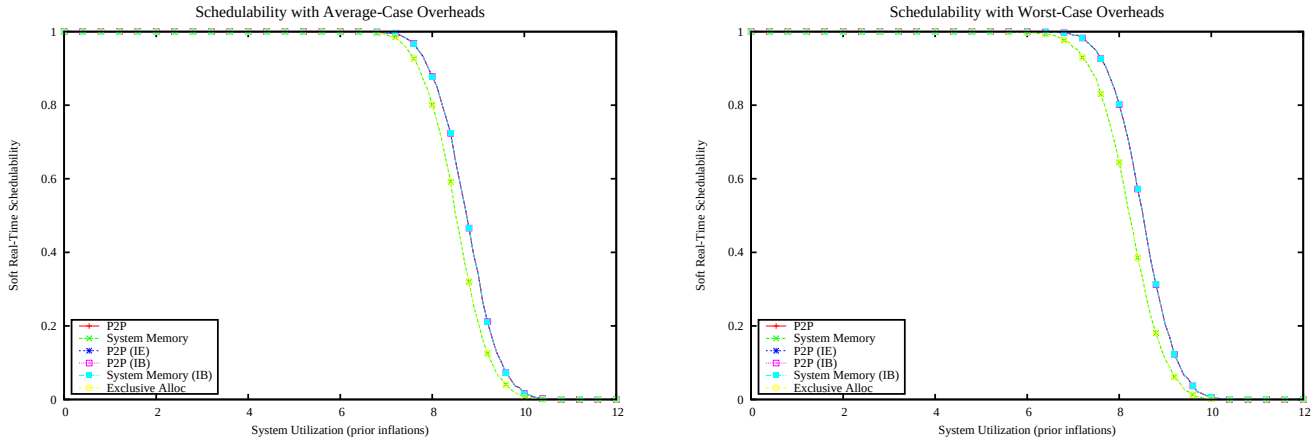

Figure 5022: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

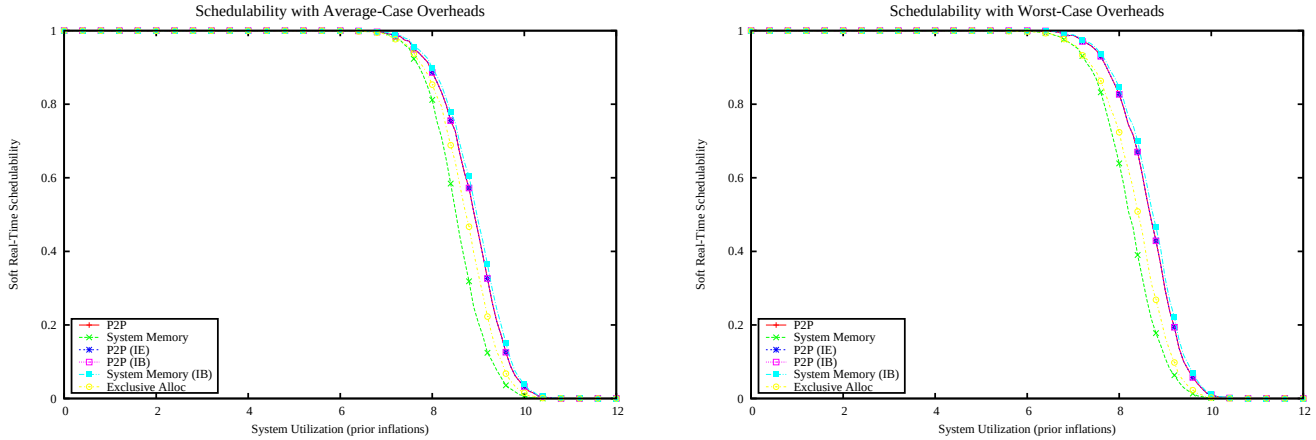

Figure 5023: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

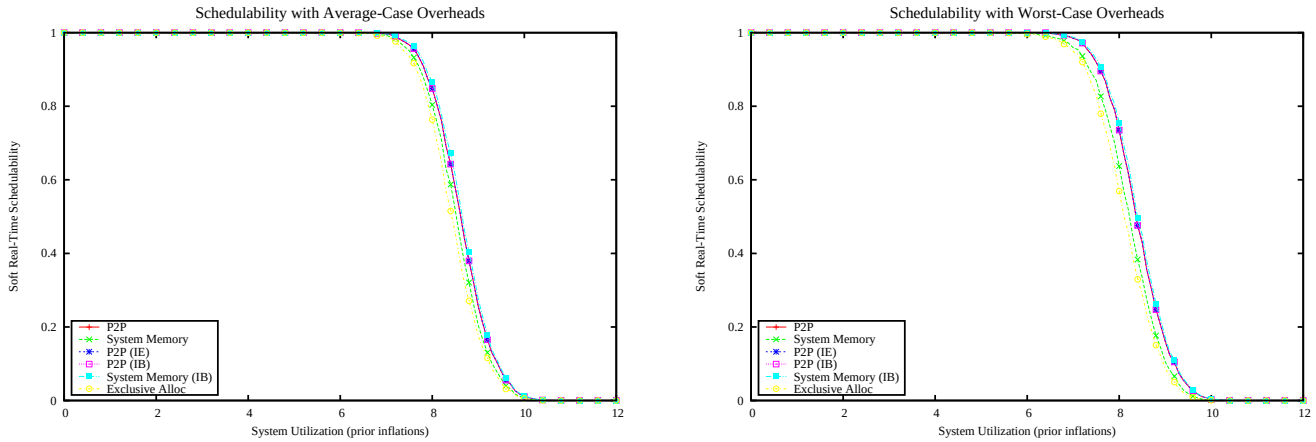

Figure 5024: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

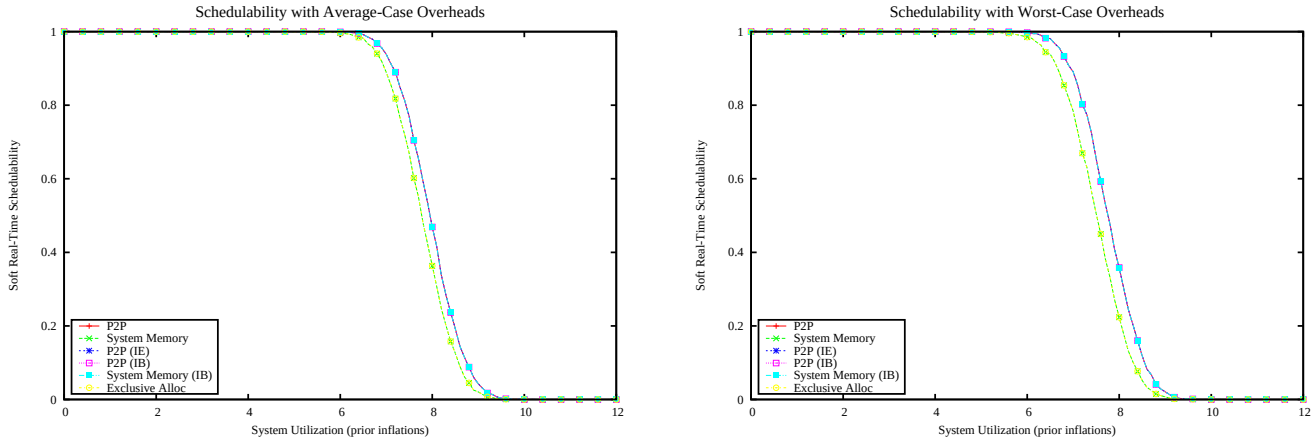

Figure 5025: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

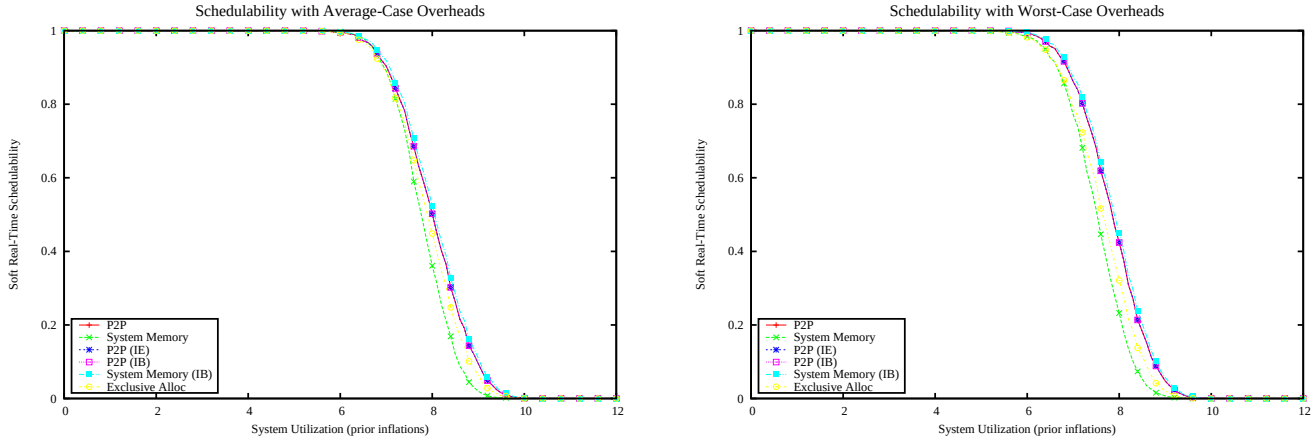

Figure 5026: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

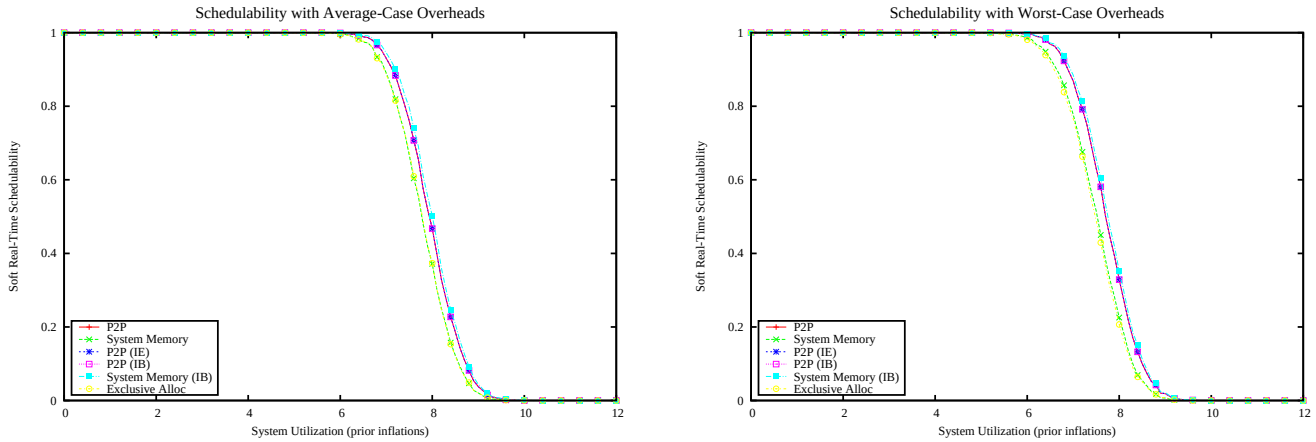

Figure 5027: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

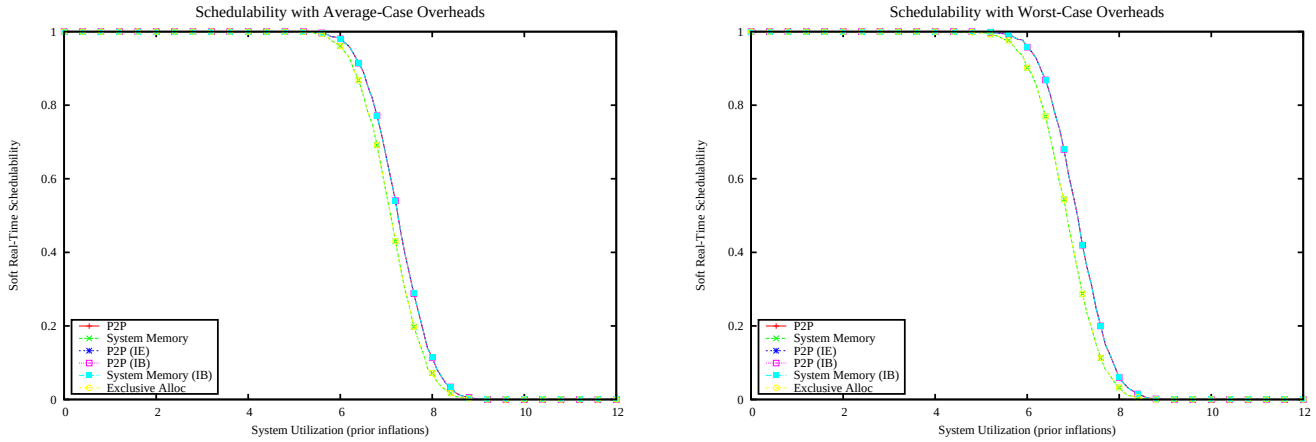

Figure 5028: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

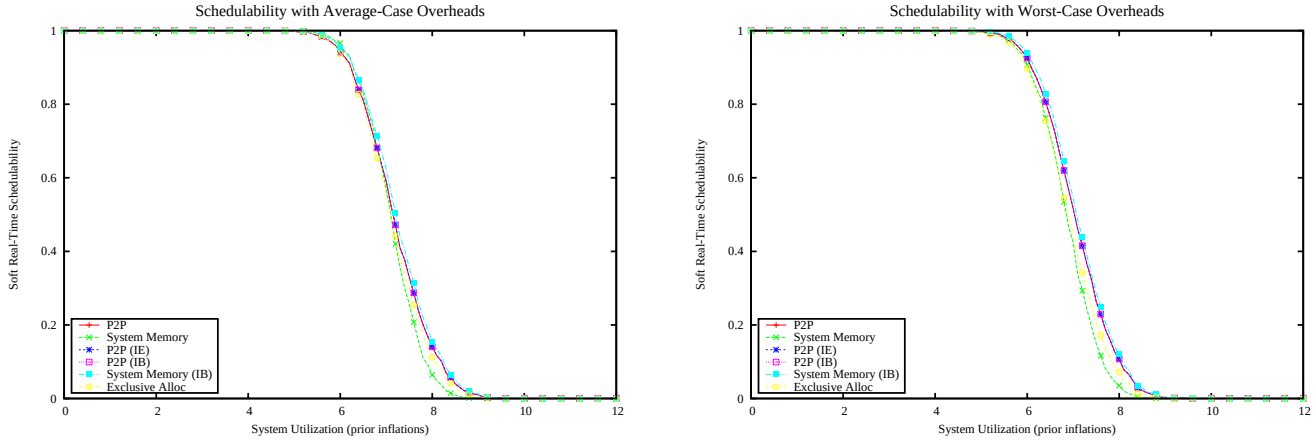

Figure 5029: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

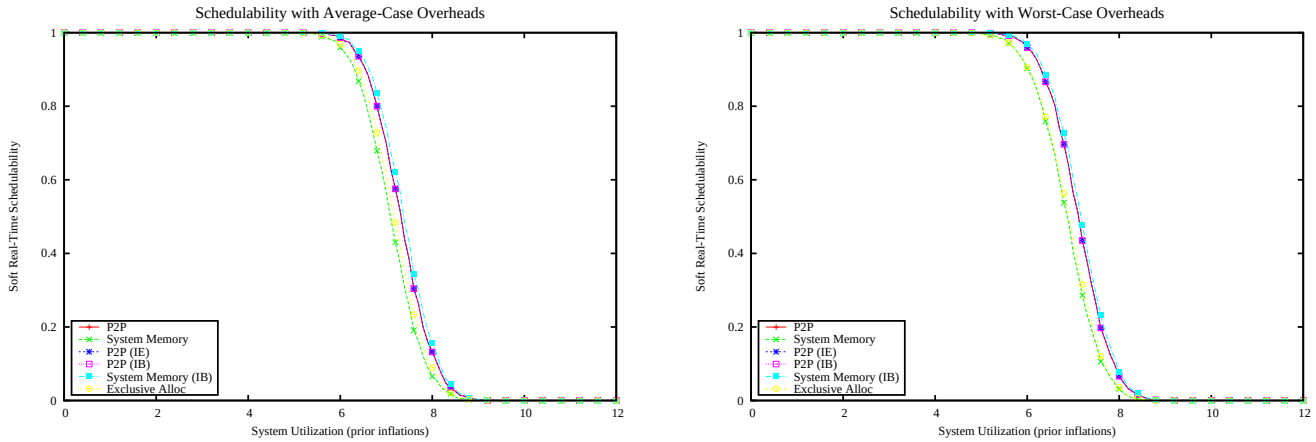

Figure 5030: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

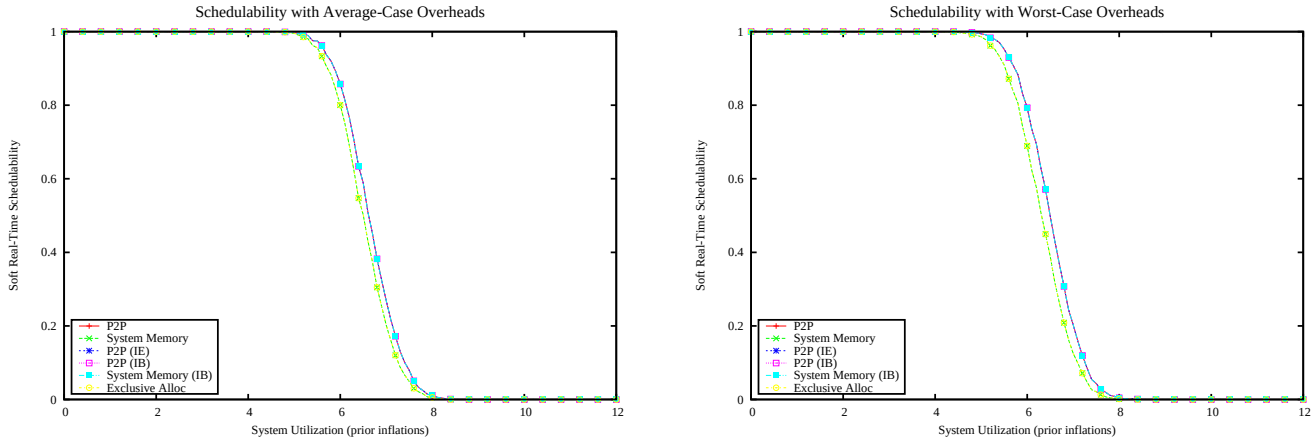

Figure 5031: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

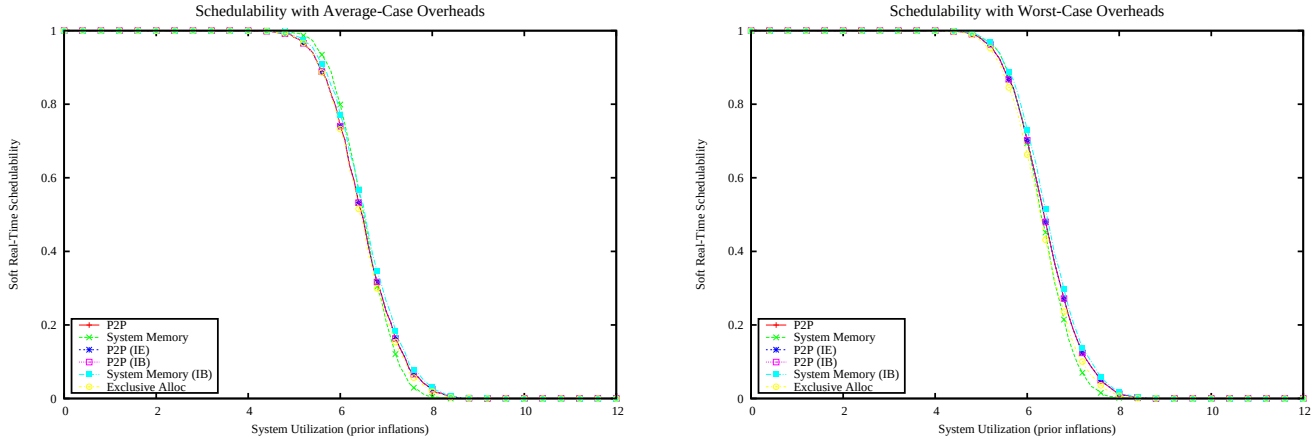

Figure 5032: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

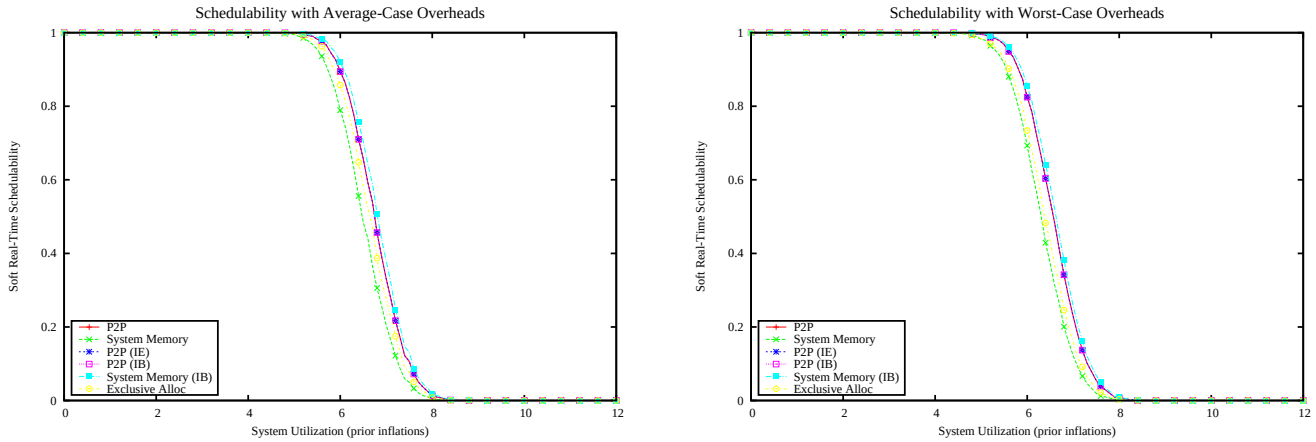

Figure 5033: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

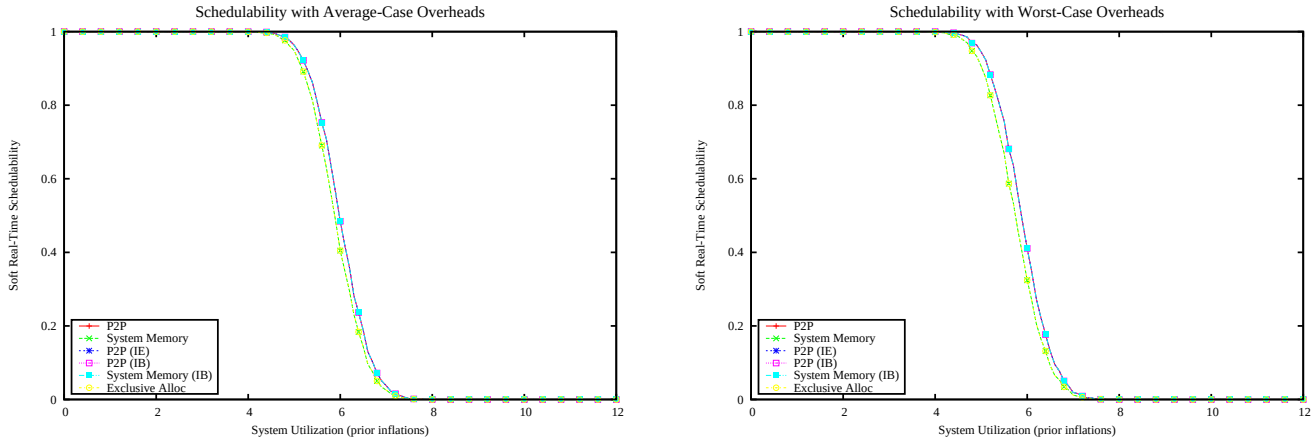

Figure 5034: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

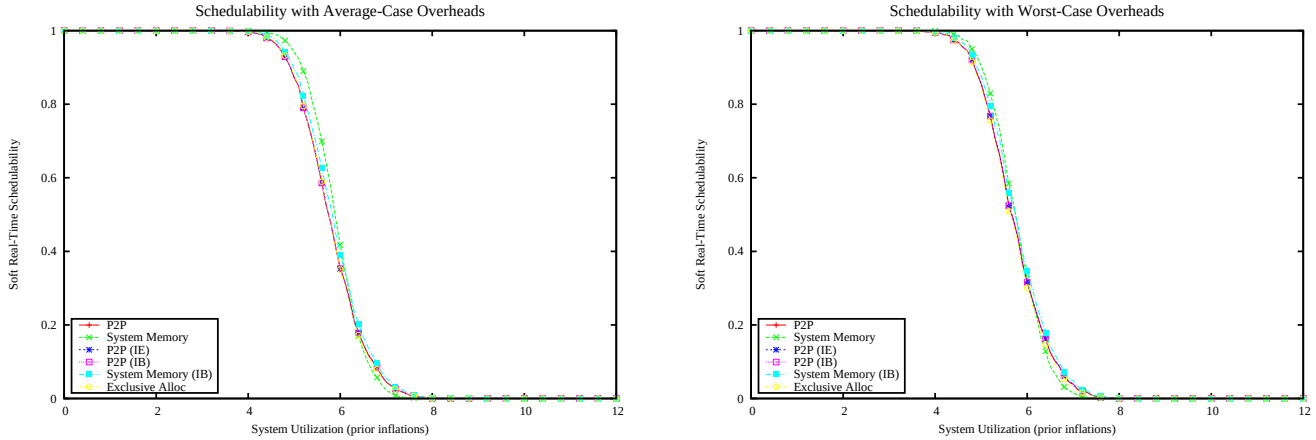

Figure 5035: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

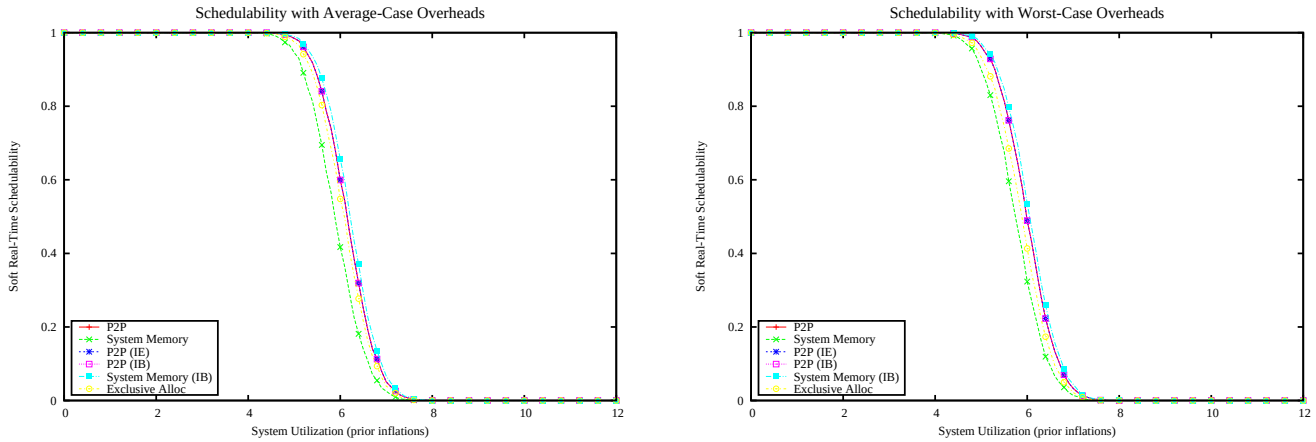

Figure 5036: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

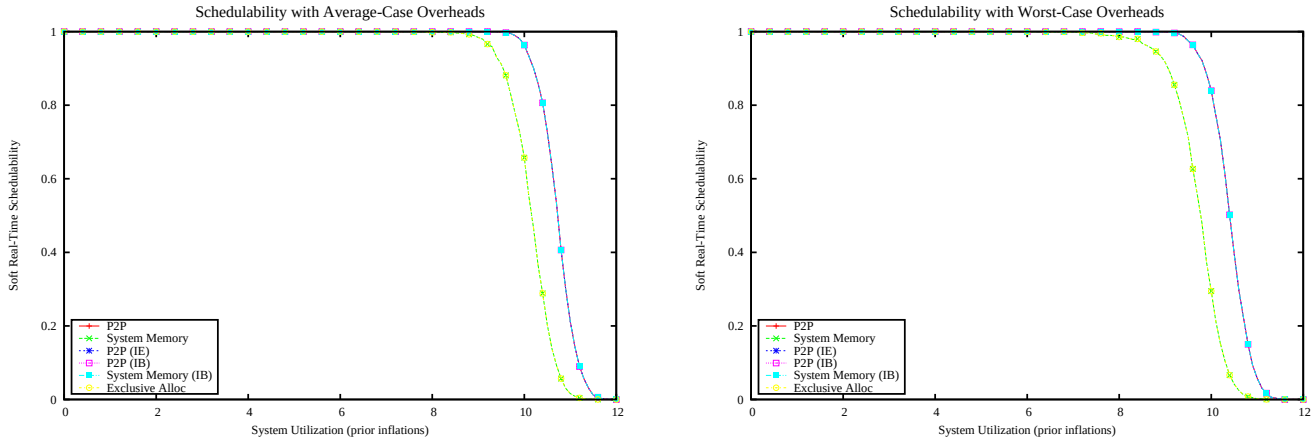

Figure 5037: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

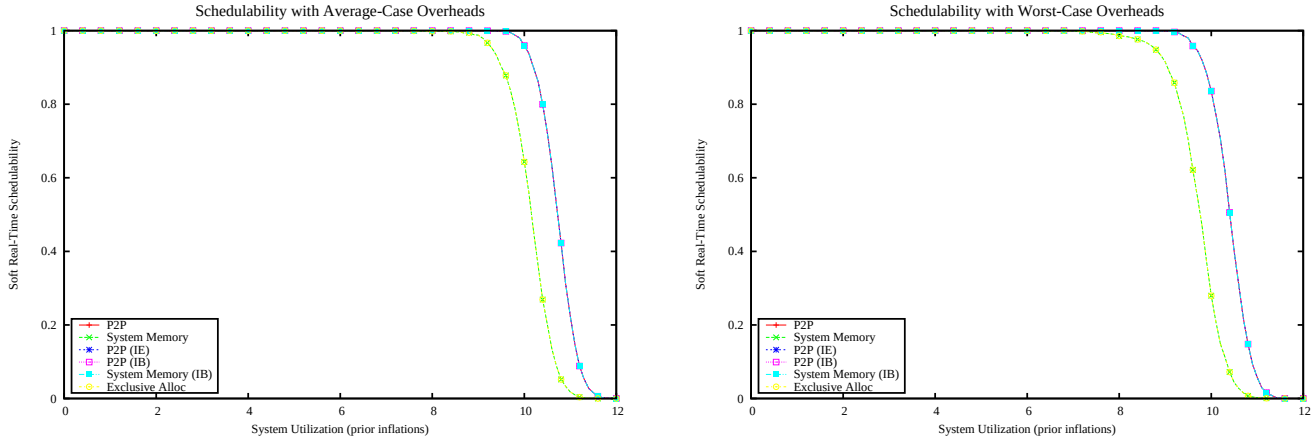

Figure 5038: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

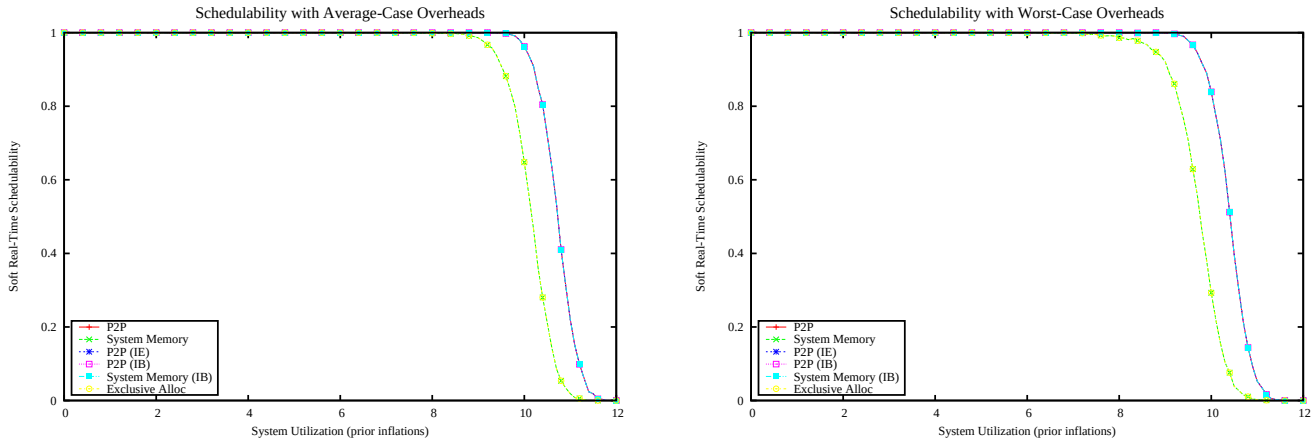

Figure 5039: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

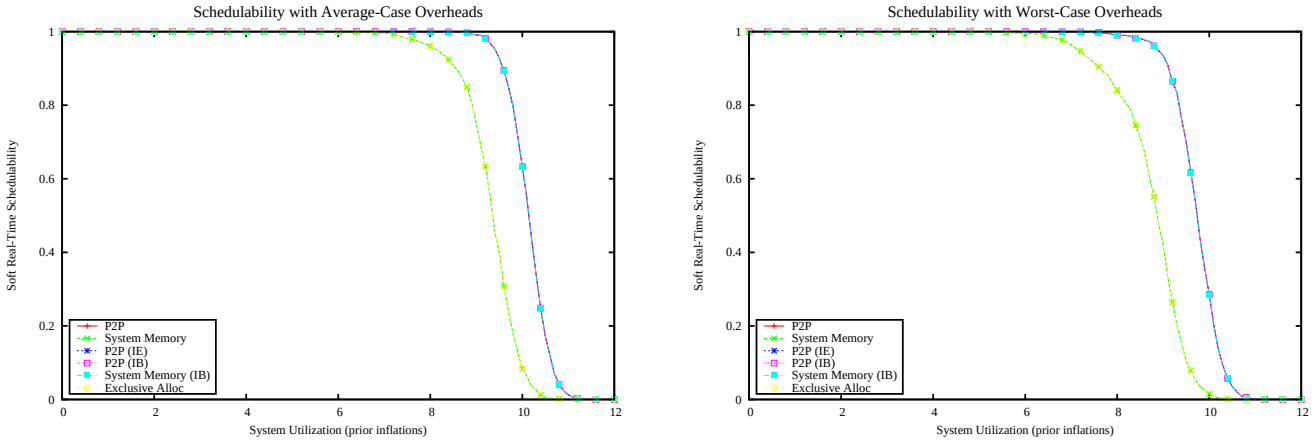

Figure 5040: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

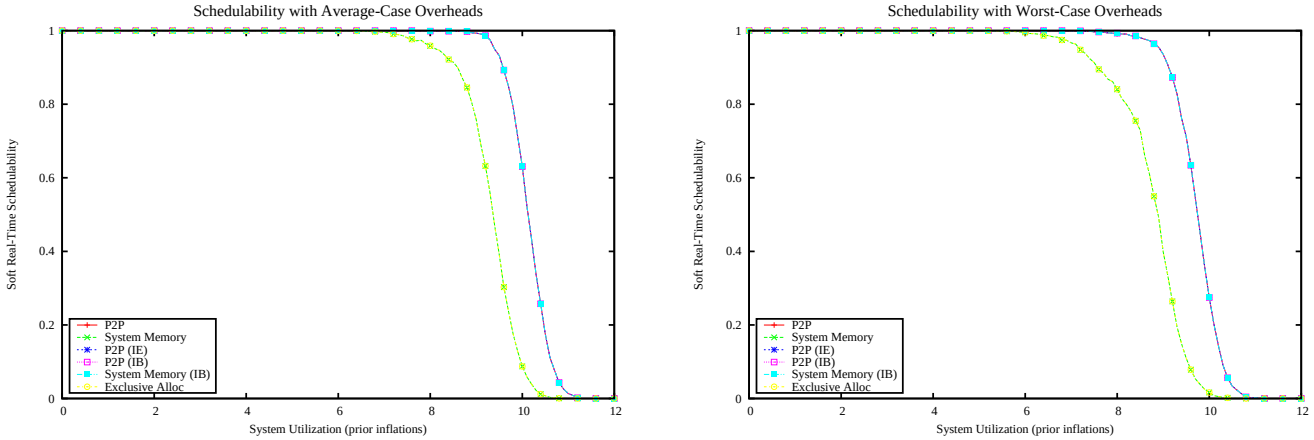

Figure 5041: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

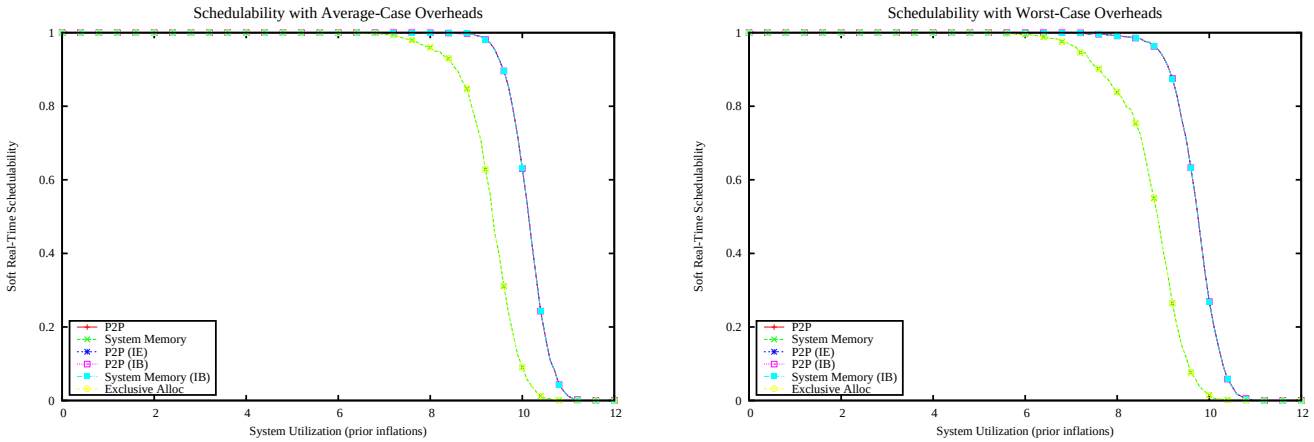

Figure 5042: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

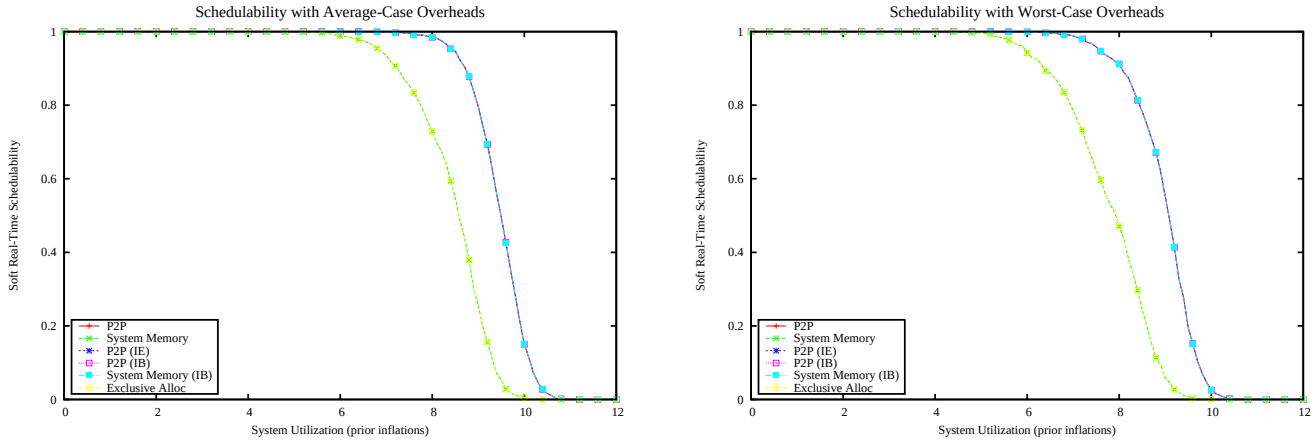

Figure 5043: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

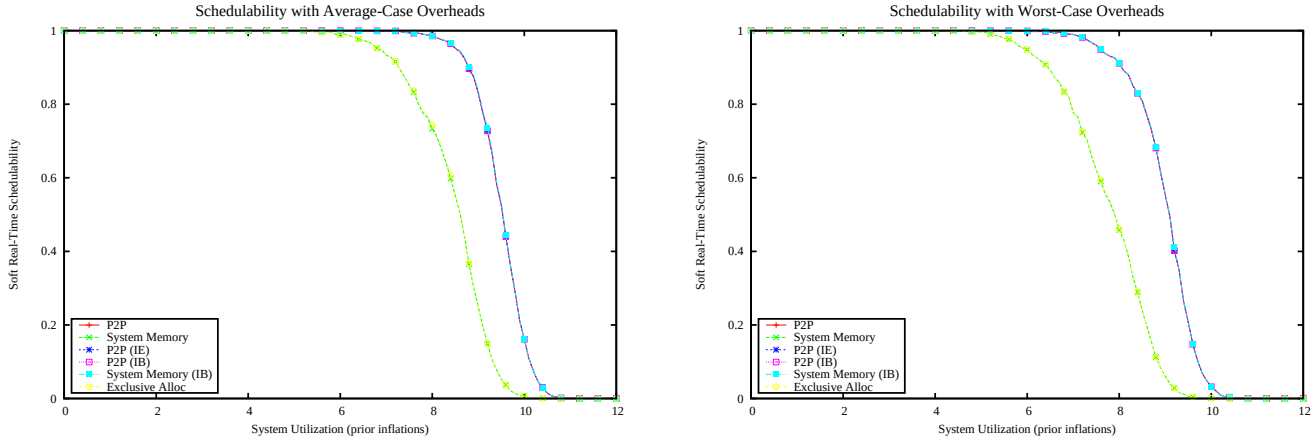

Figure 5044: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

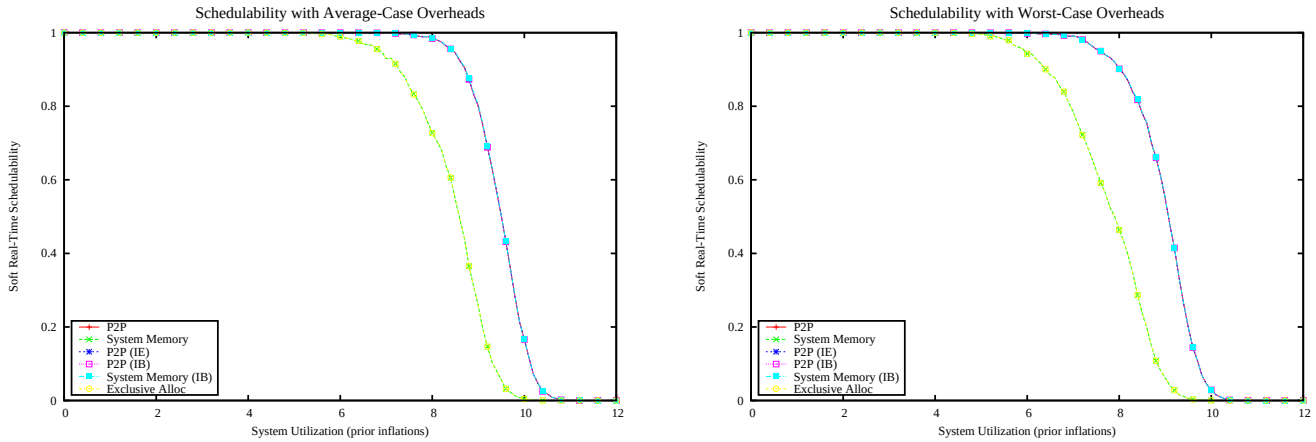

Figure 5045: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

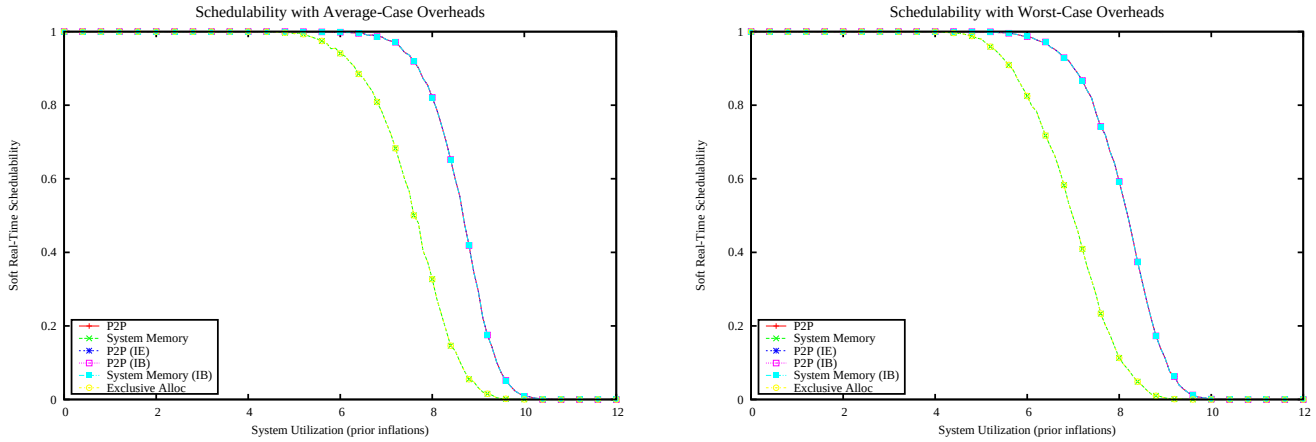

Figure 5046: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

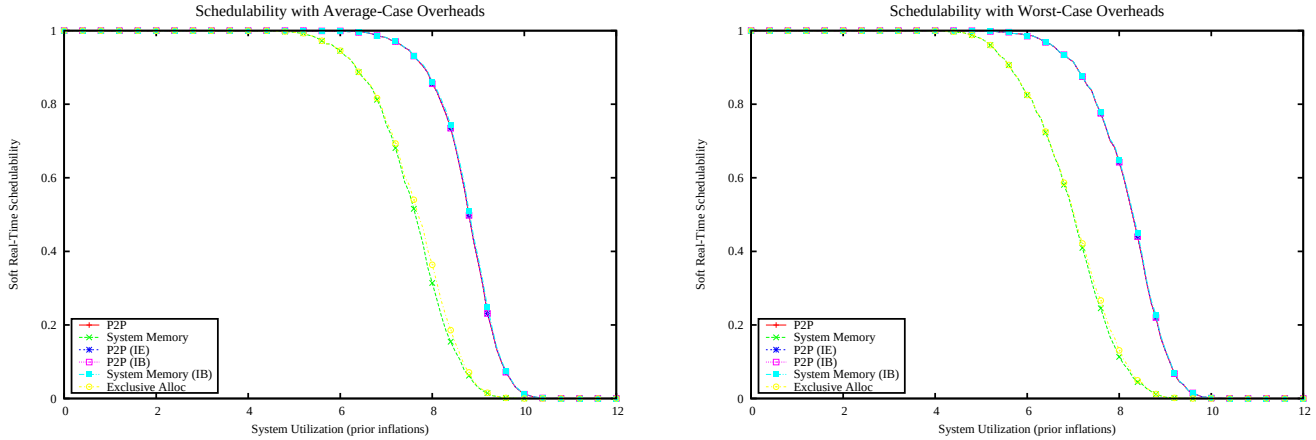

Figure 5047: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

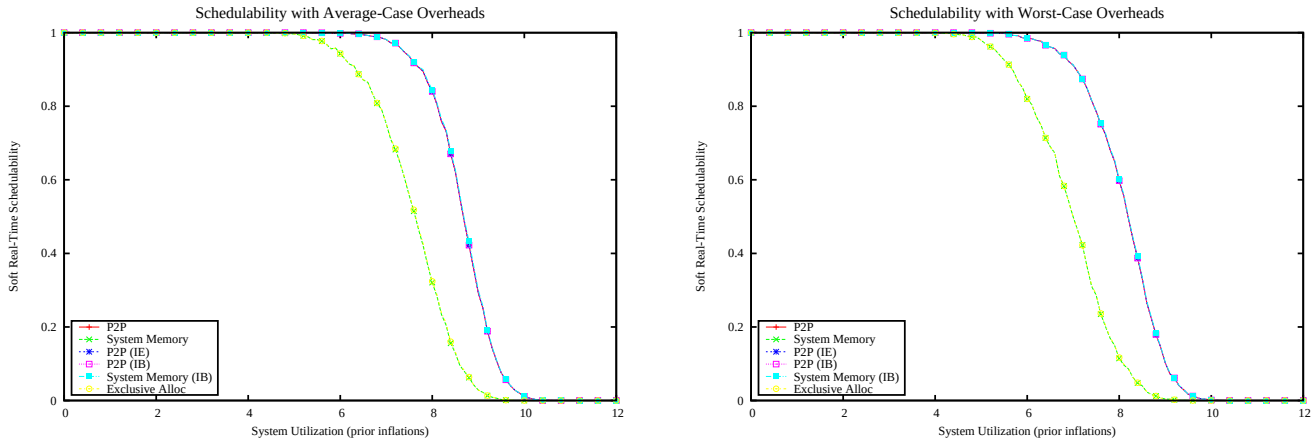

Figure 5048: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

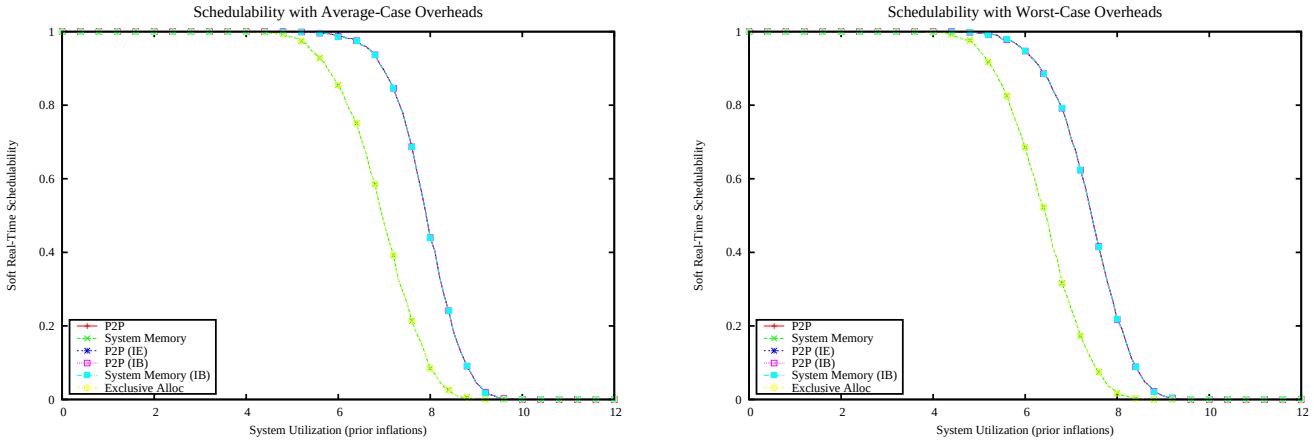

Figure 5049: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

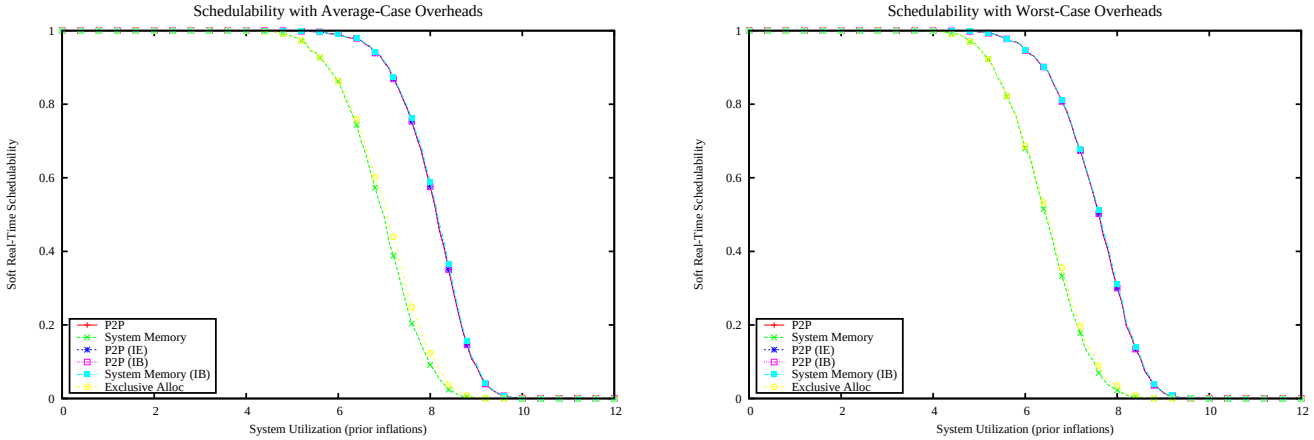

Figure 5050: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

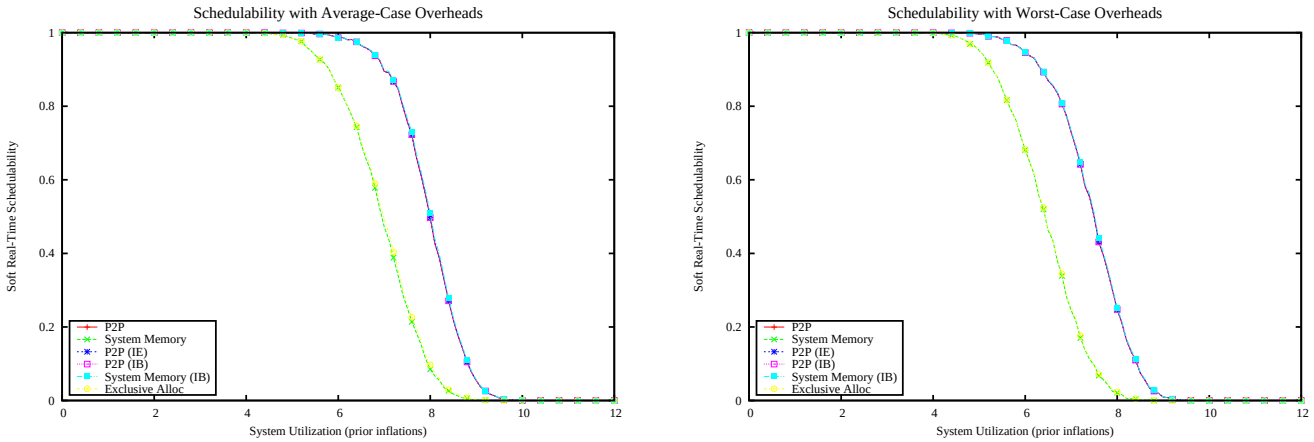

Figure 5051: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

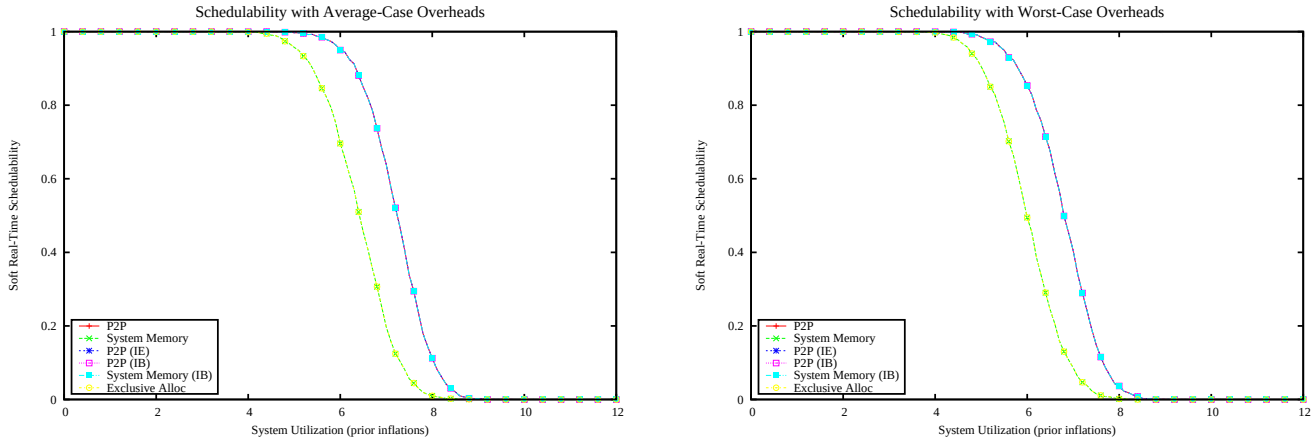

Figure 5052: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

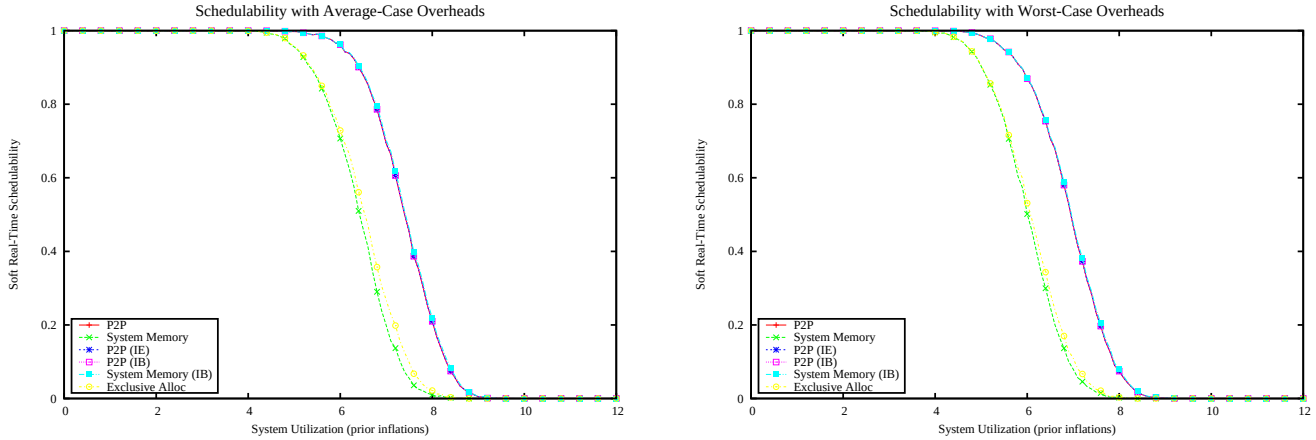

Figure 5053: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

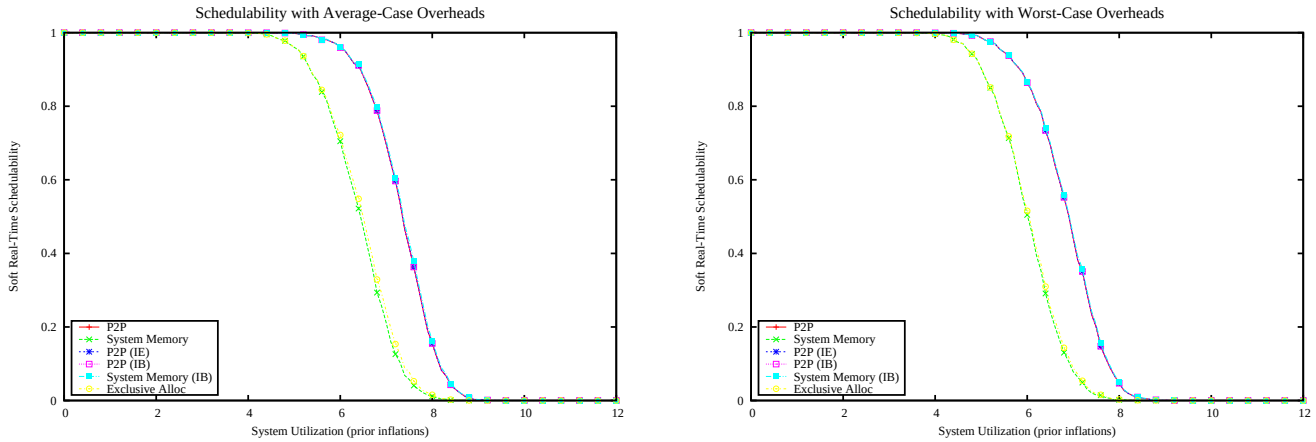

Figure 5054: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

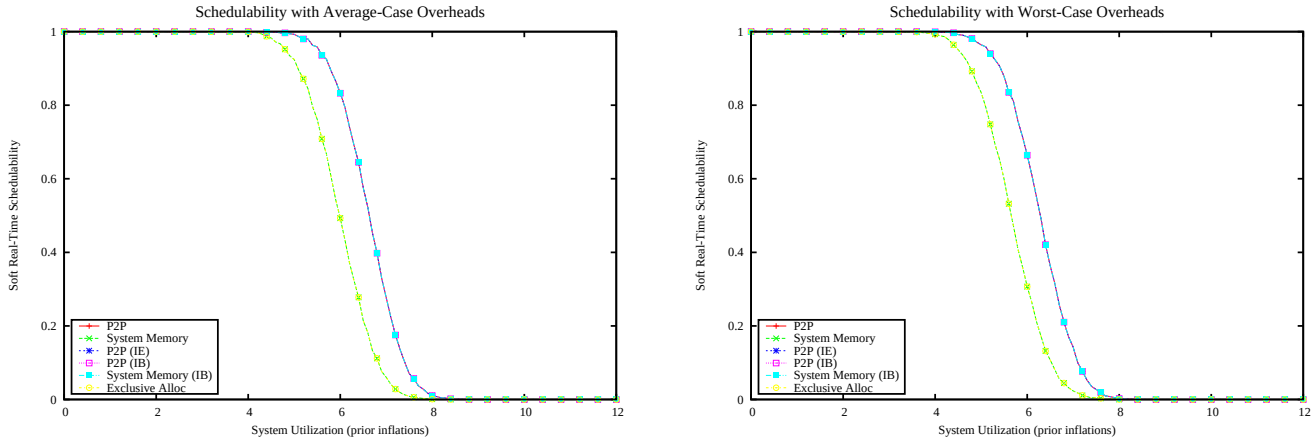

Figure 5055: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

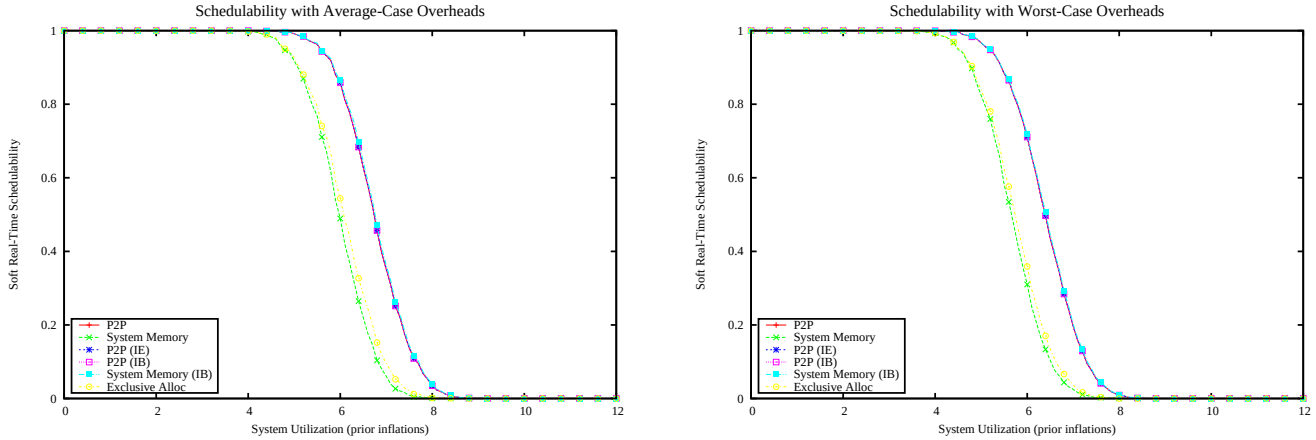

Figure 5056: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

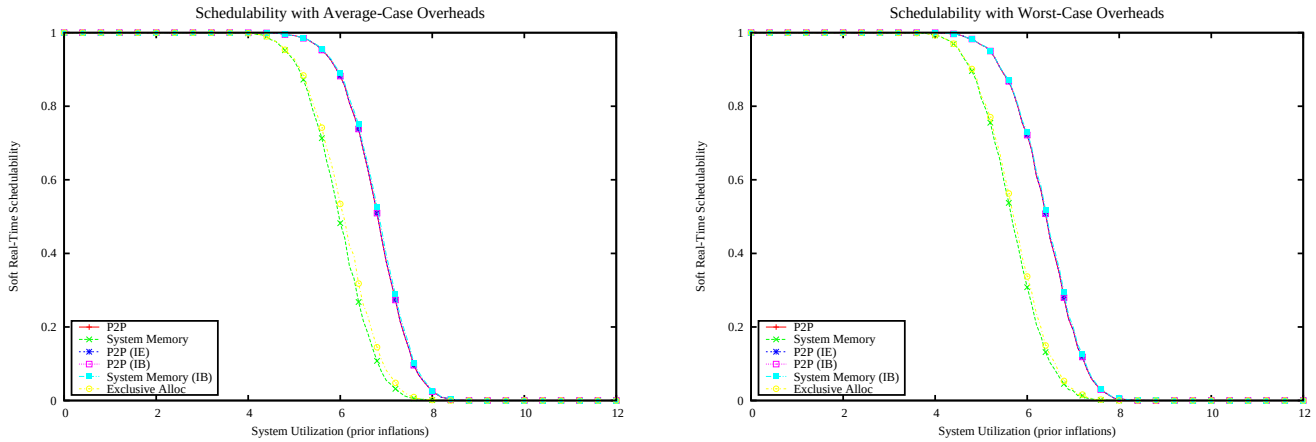

Figure 5057: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

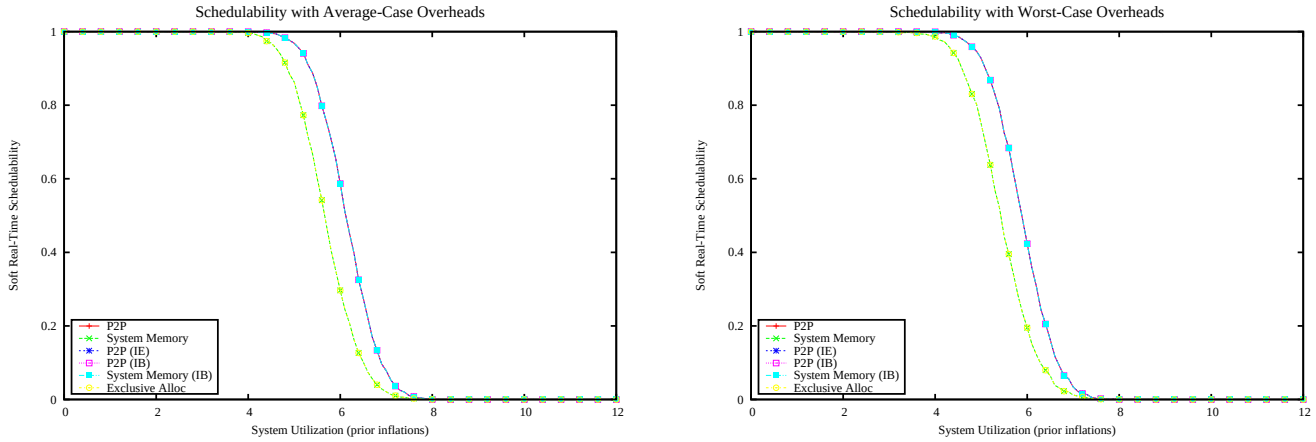

Figure 5058: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

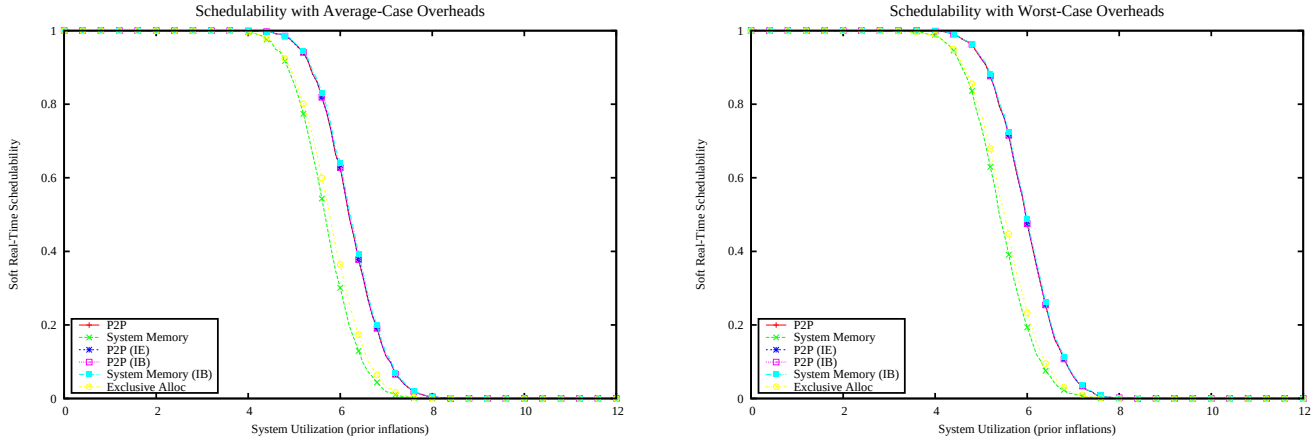

Figure 5059: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

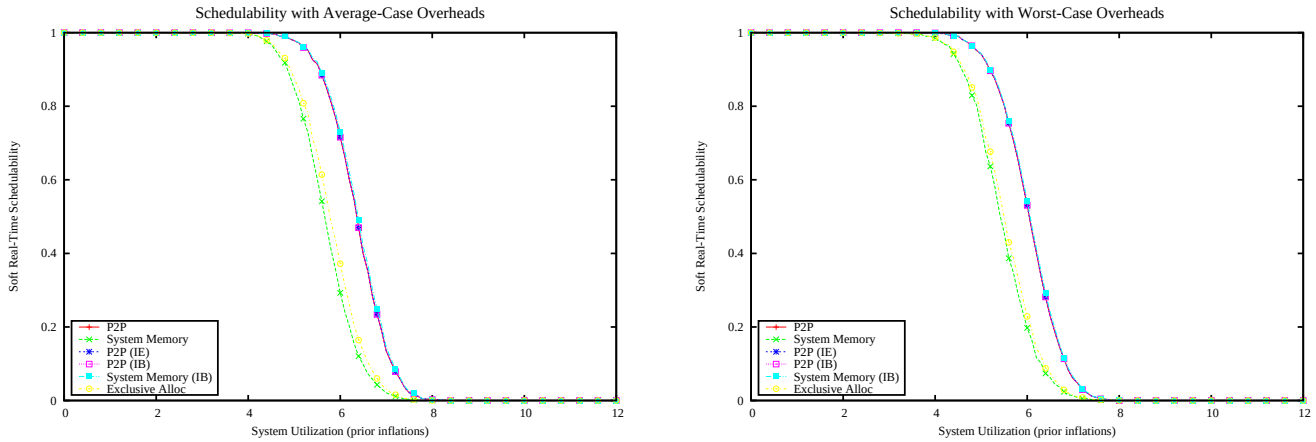

Figure 5060: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

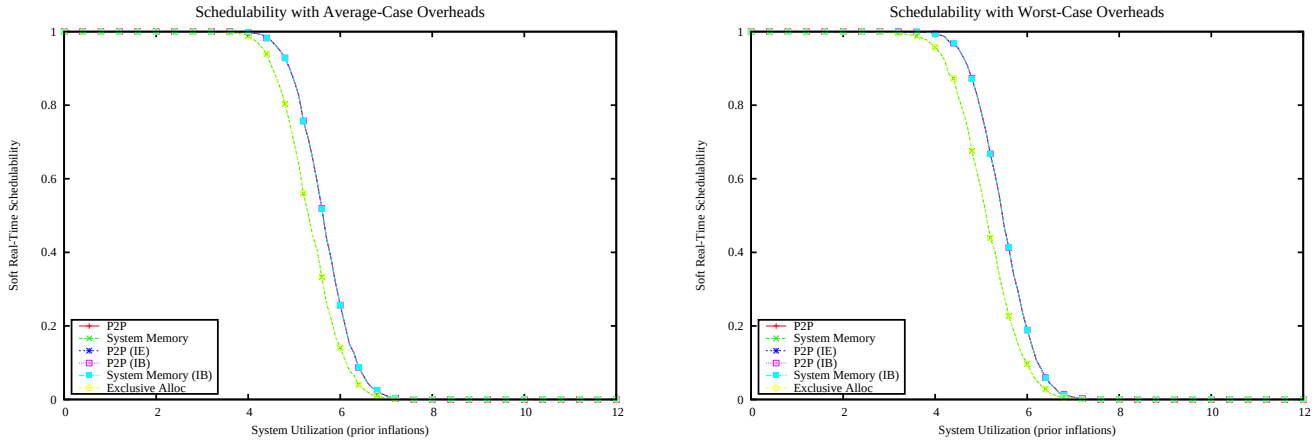

Figure 5061: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

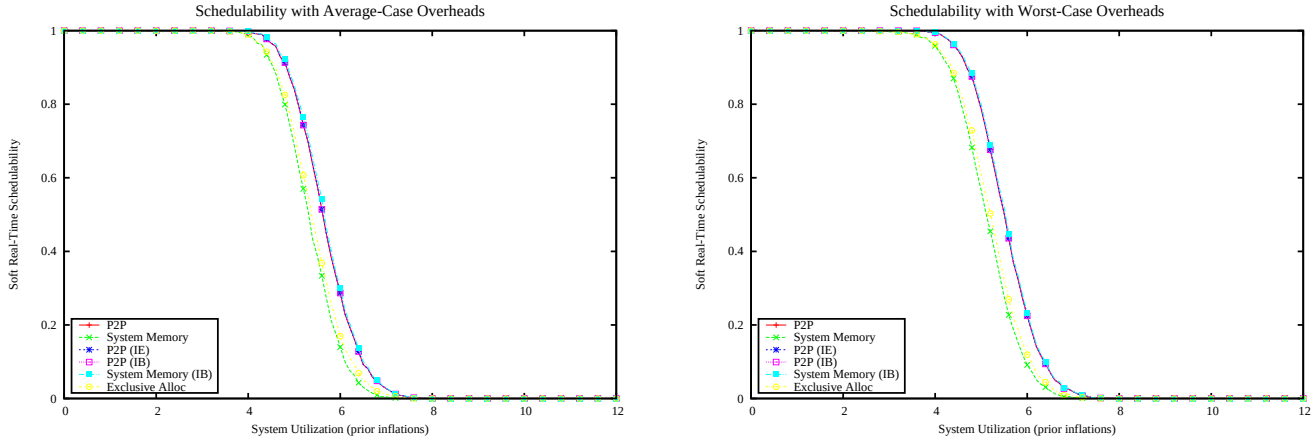

Figure 5062: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

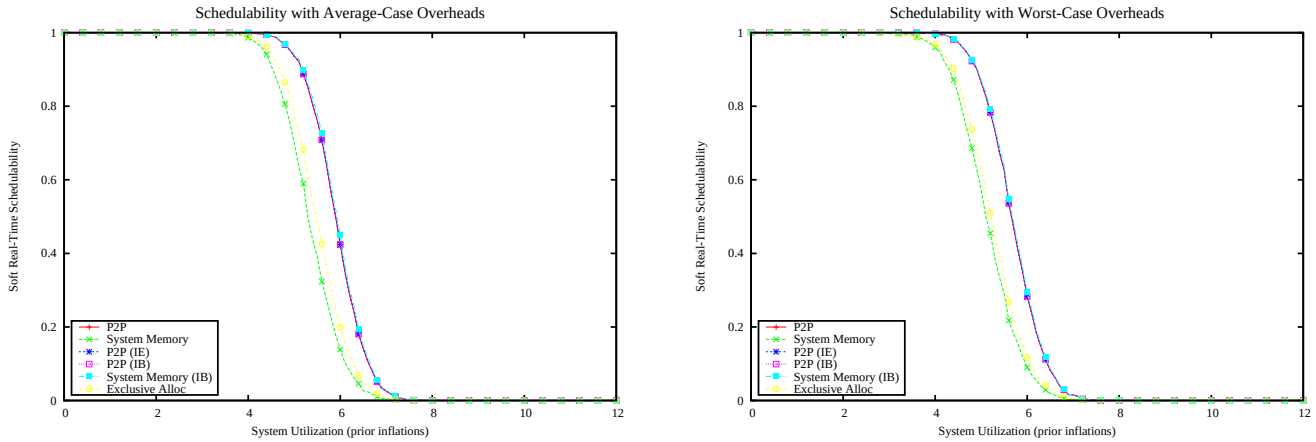

Figure 5063: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

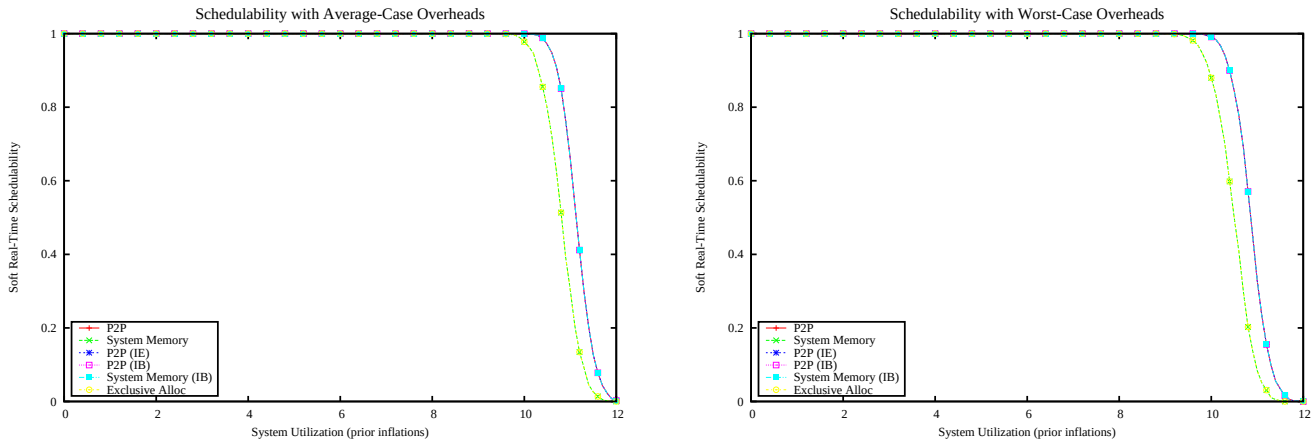

Figure 5064: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

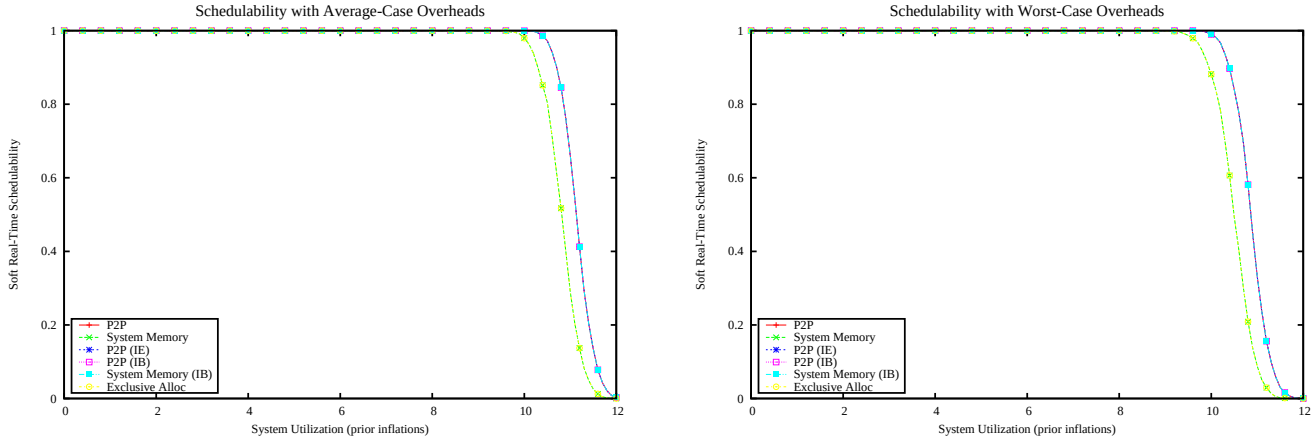

Figure 5065: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

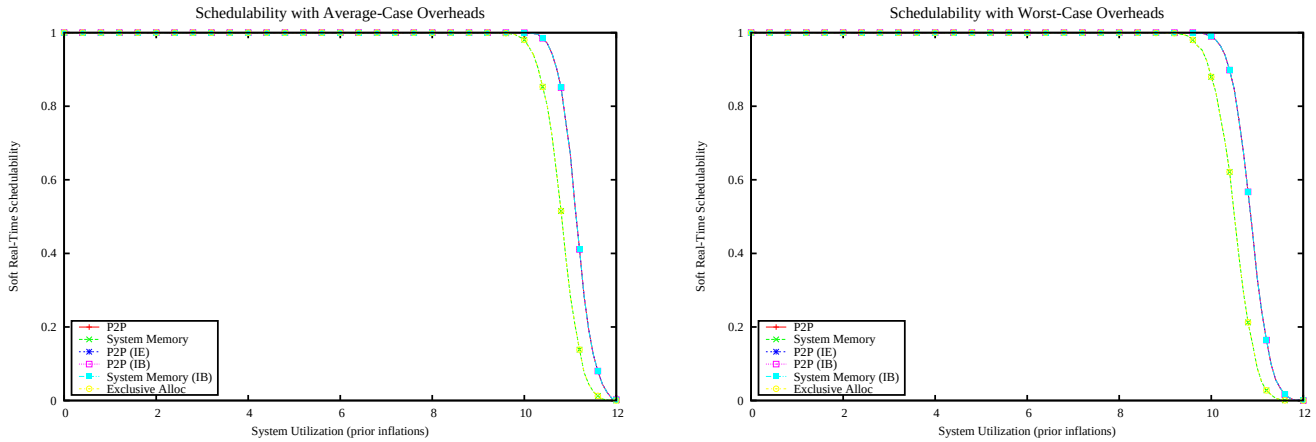

Figure 5066: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

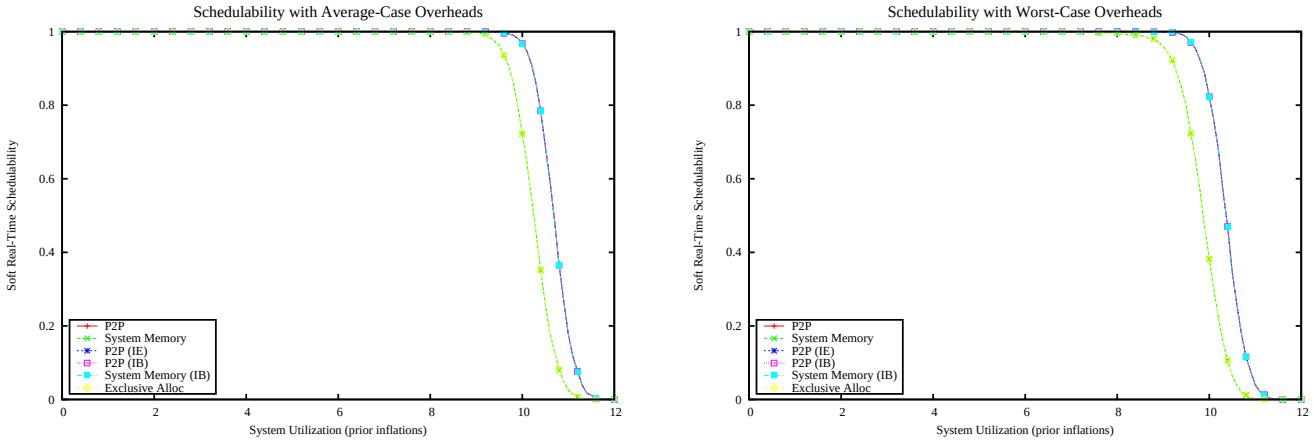

Figure 5067: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

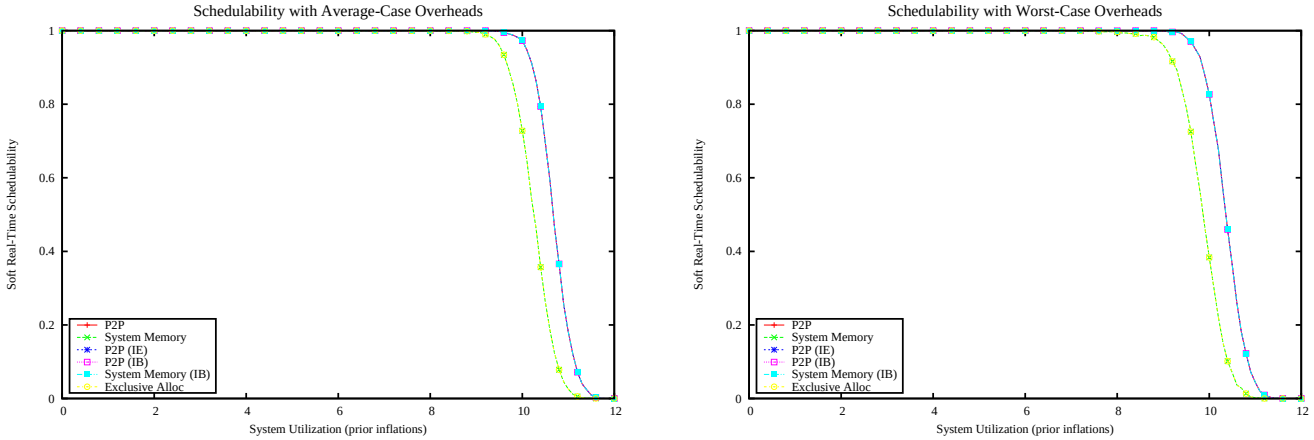

Figure 5068: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

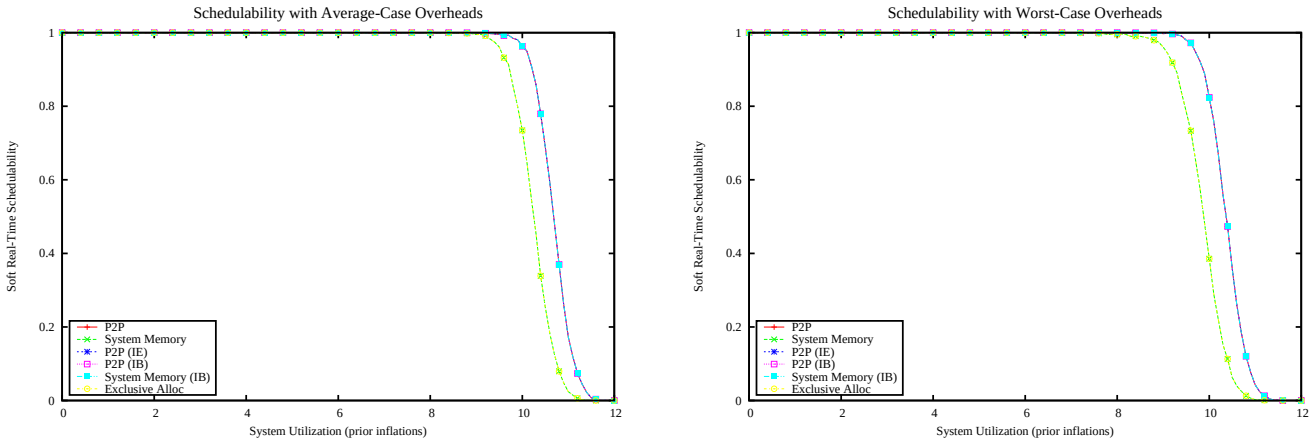

Figure 5069: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

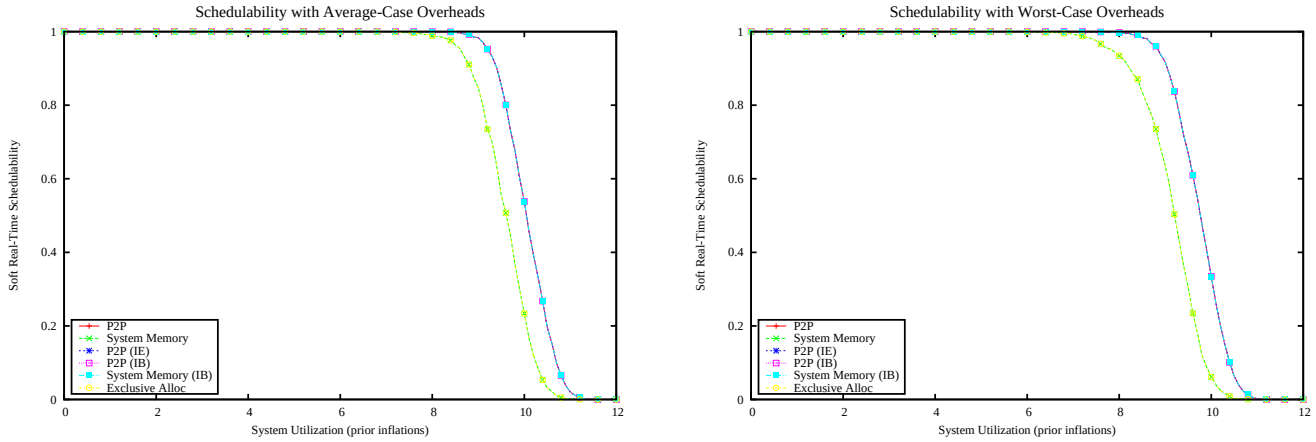

Figure 5070: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

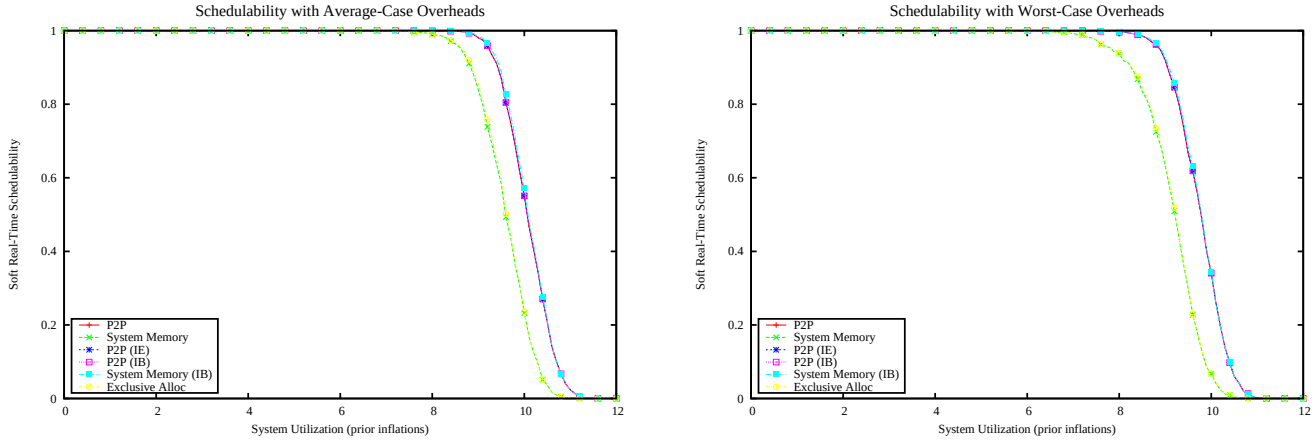

Figure 5071: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

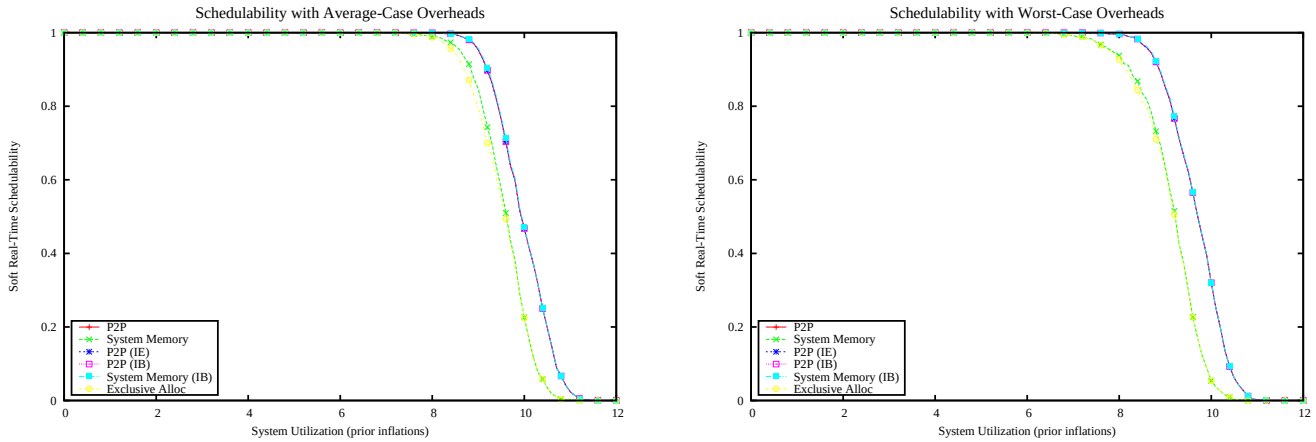

Figure 5072: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

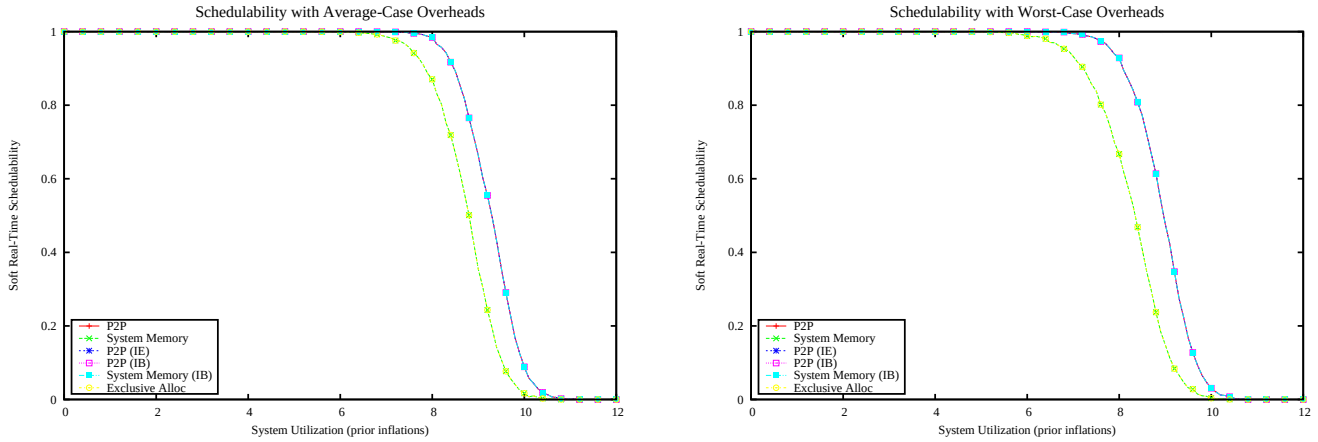

Figure 5073: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

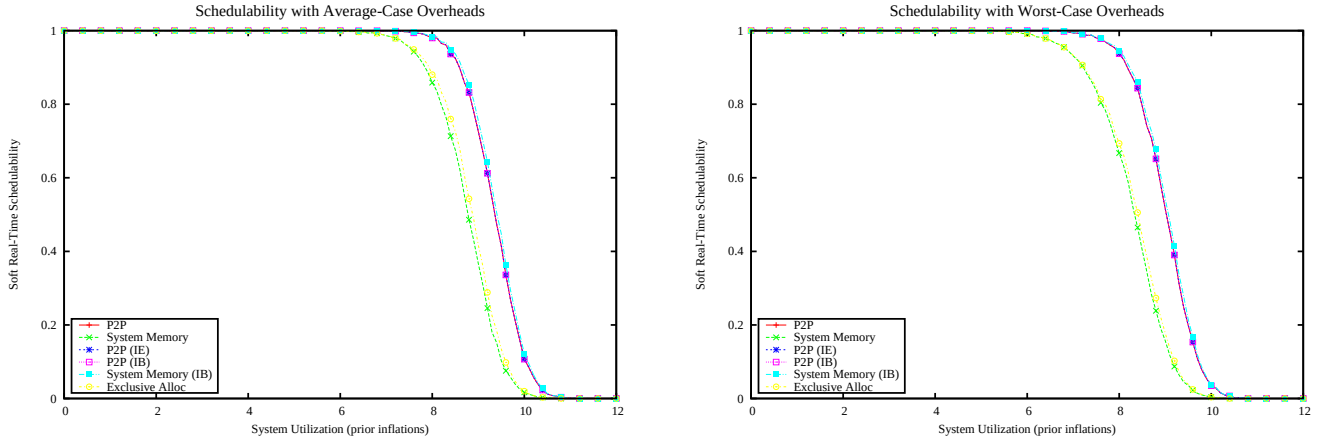

Figure 5074: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

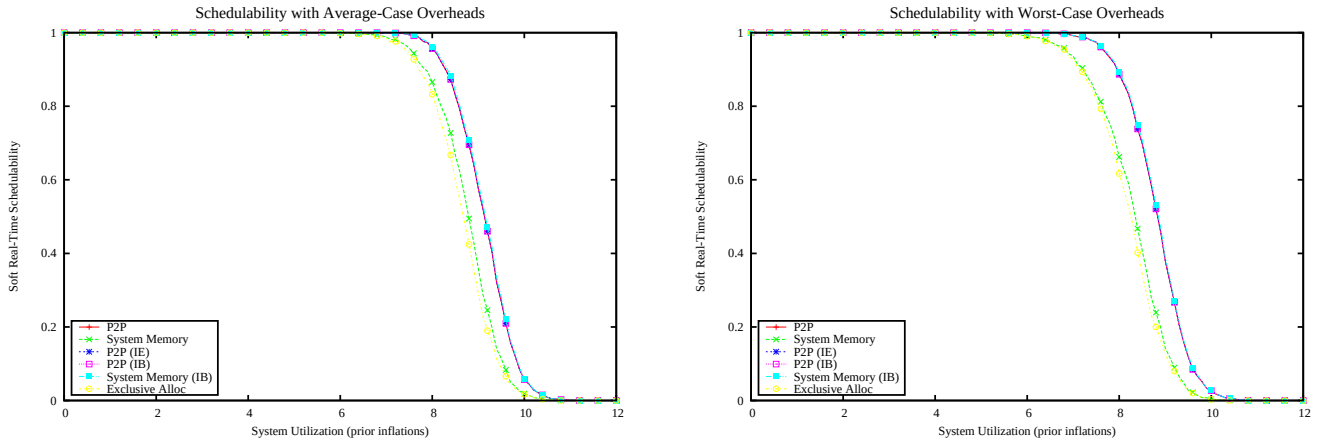

Figure 5075: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

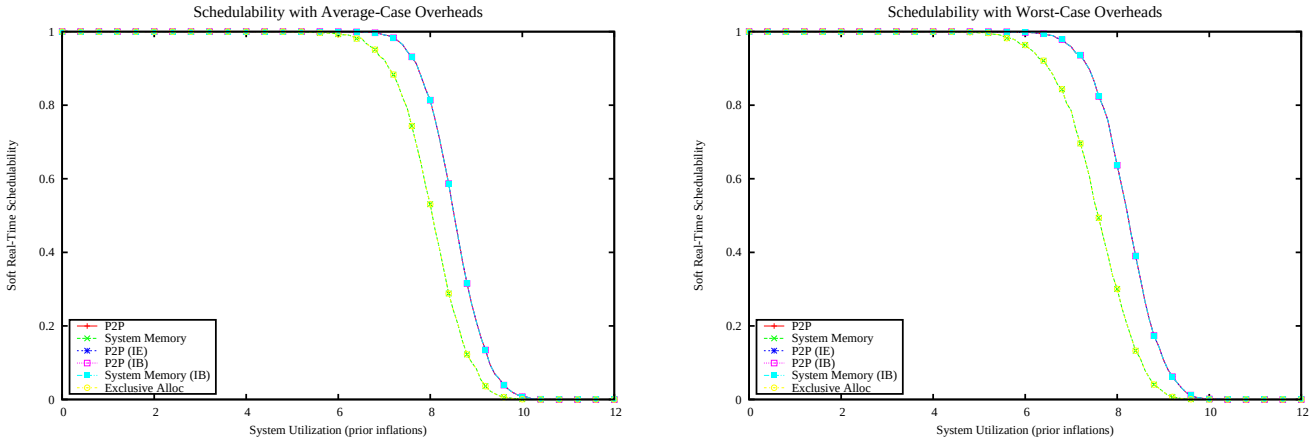

Figure 5076: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

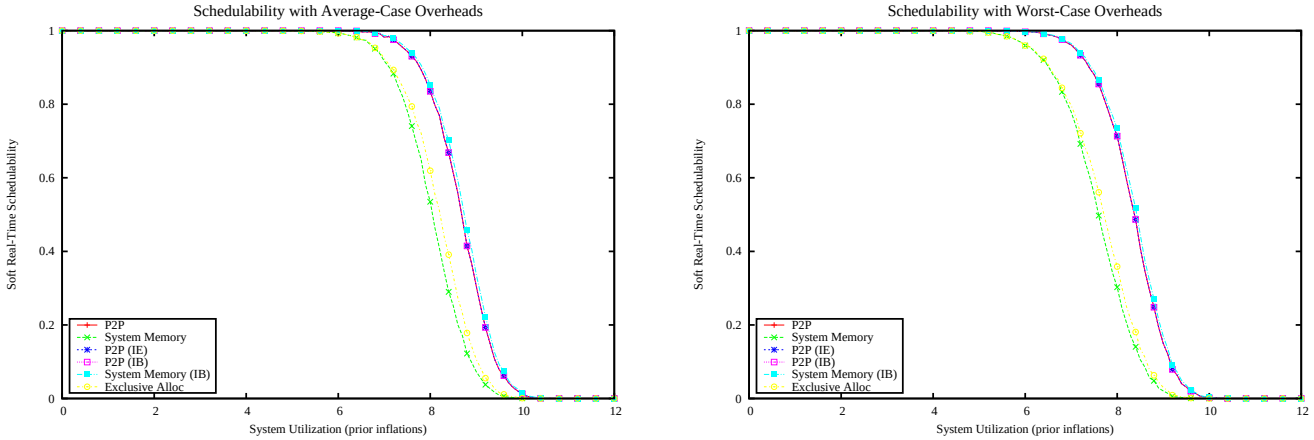

Figure 5077: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

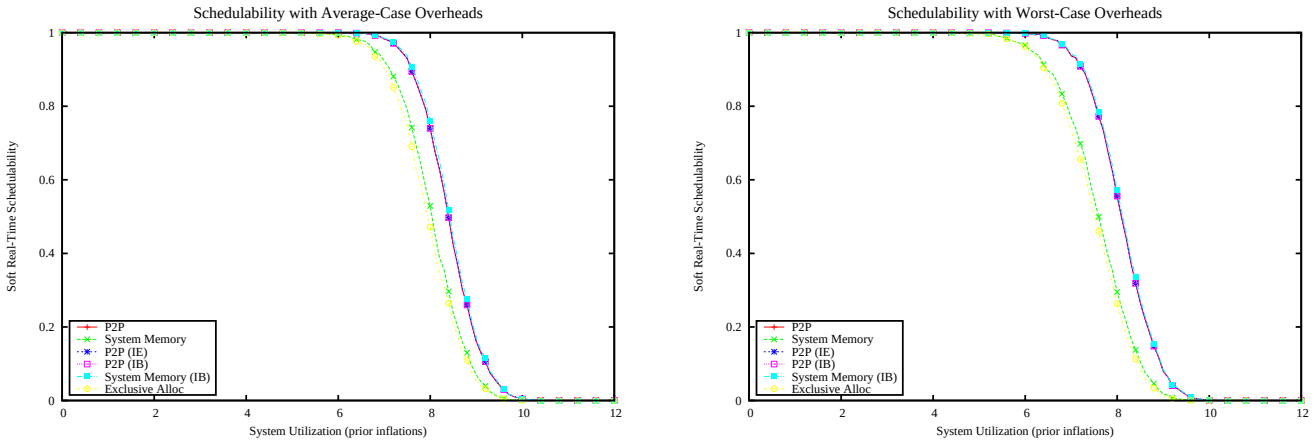

Figure 5078: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

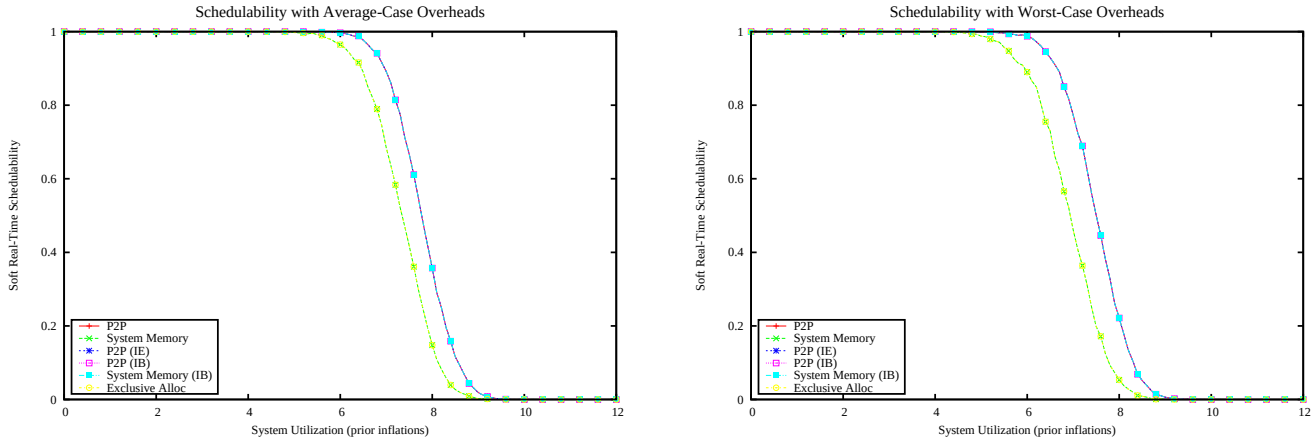

Figure 5079: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

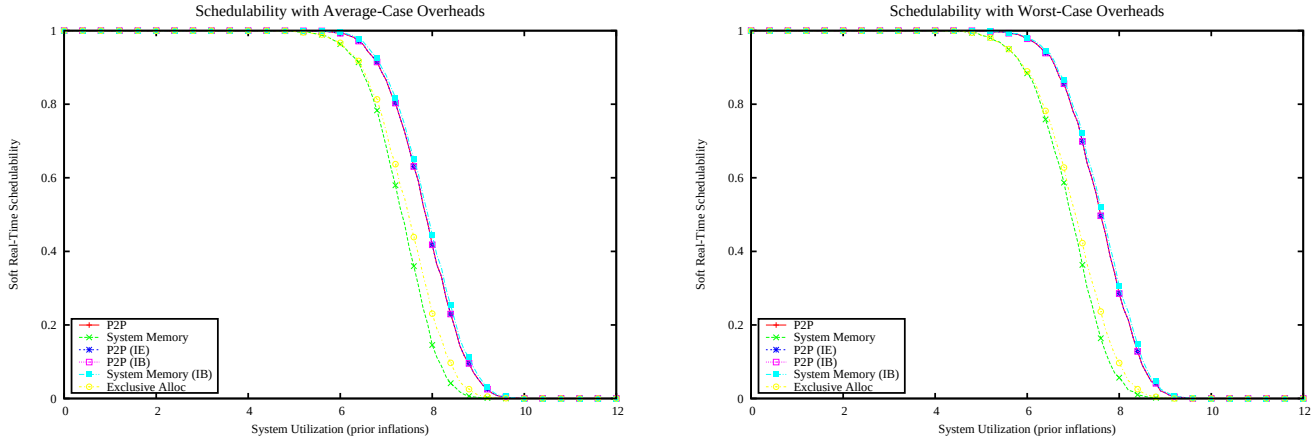

Figure 5080: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

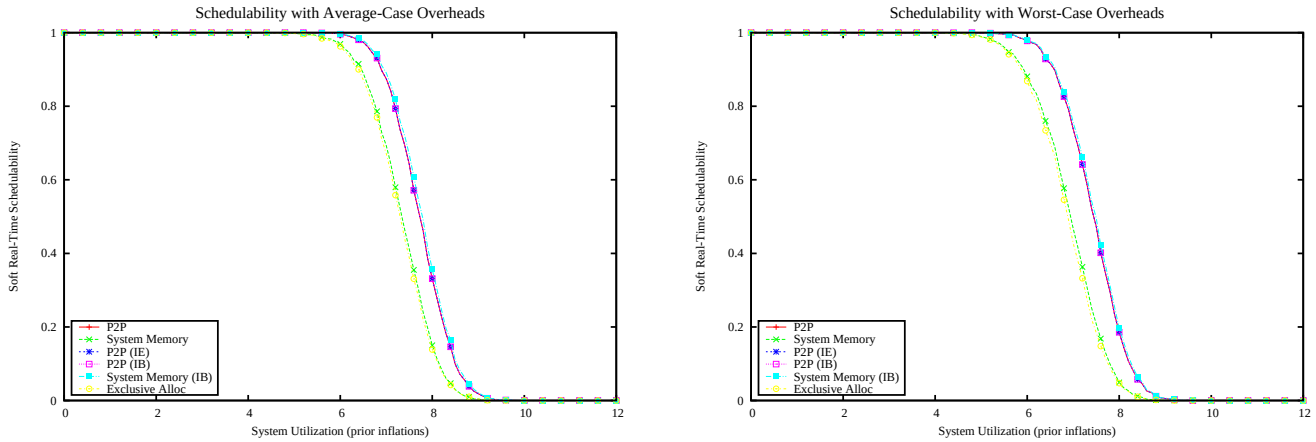

Figure 5081: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

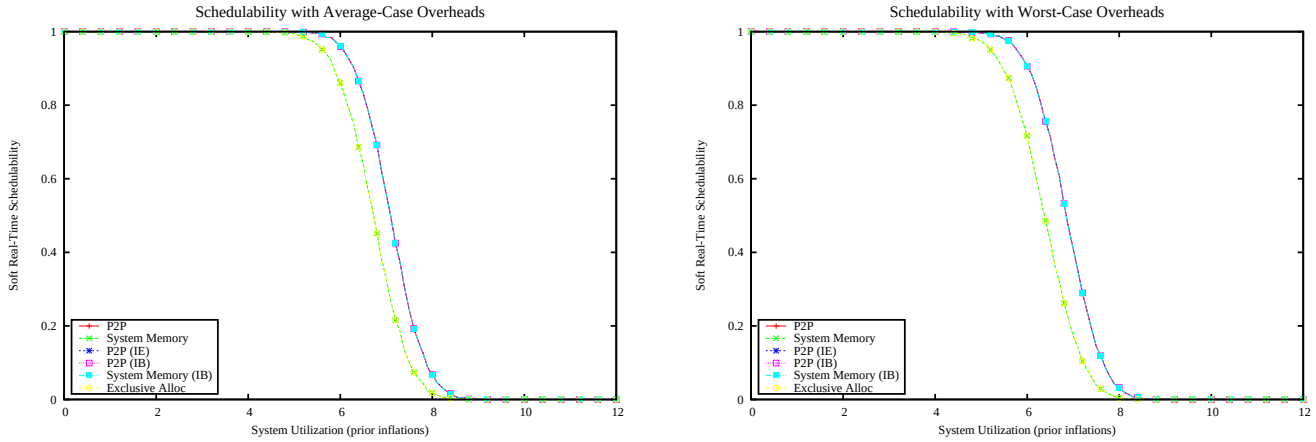

Figure 5082: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

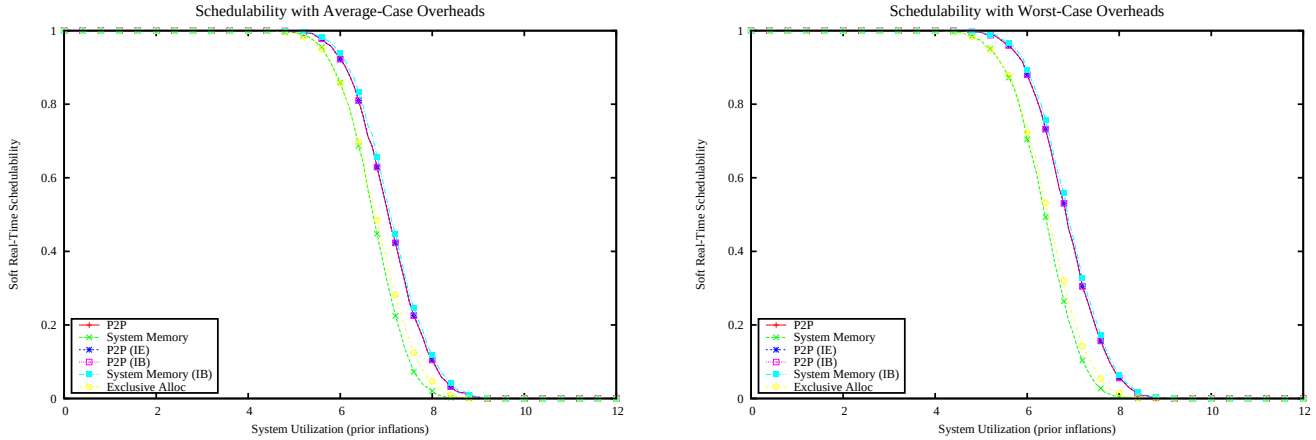

Figure 5083: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

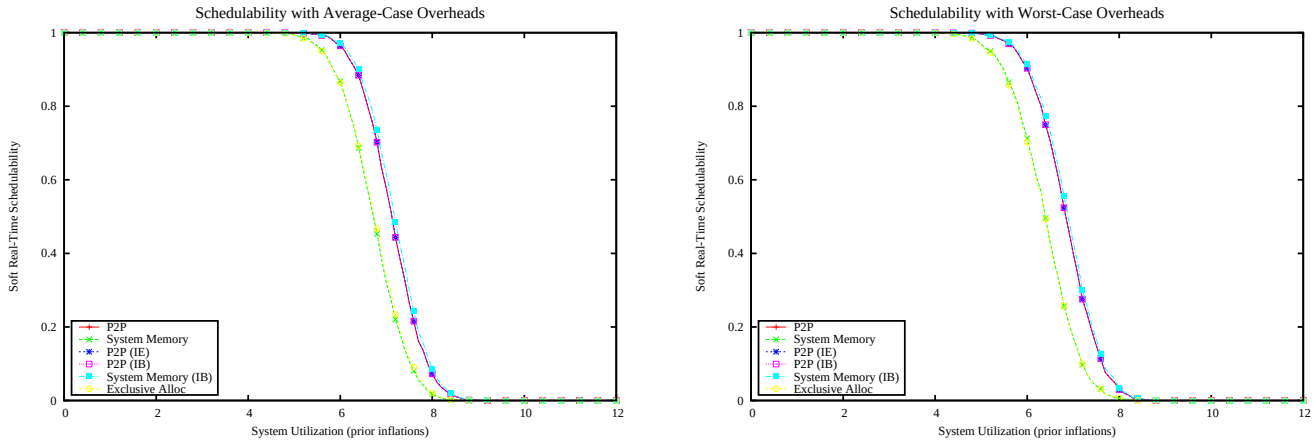

Figure 5084: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

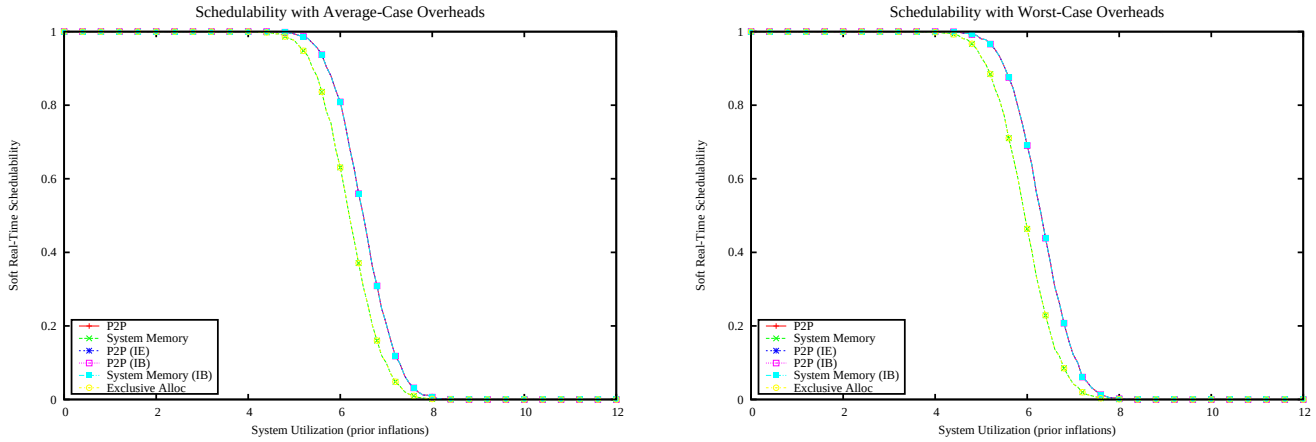

Figure 5085: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

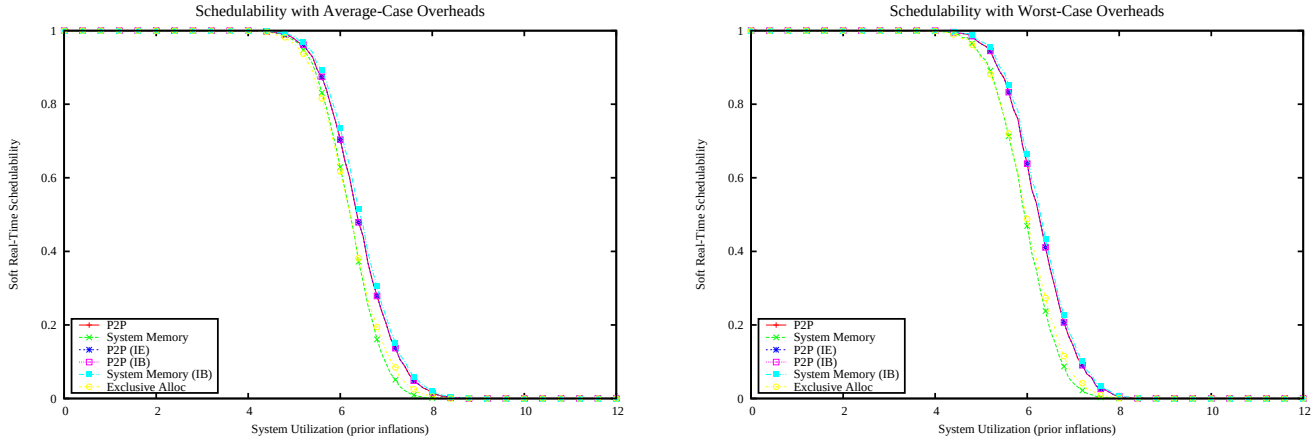

Figure 5086: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

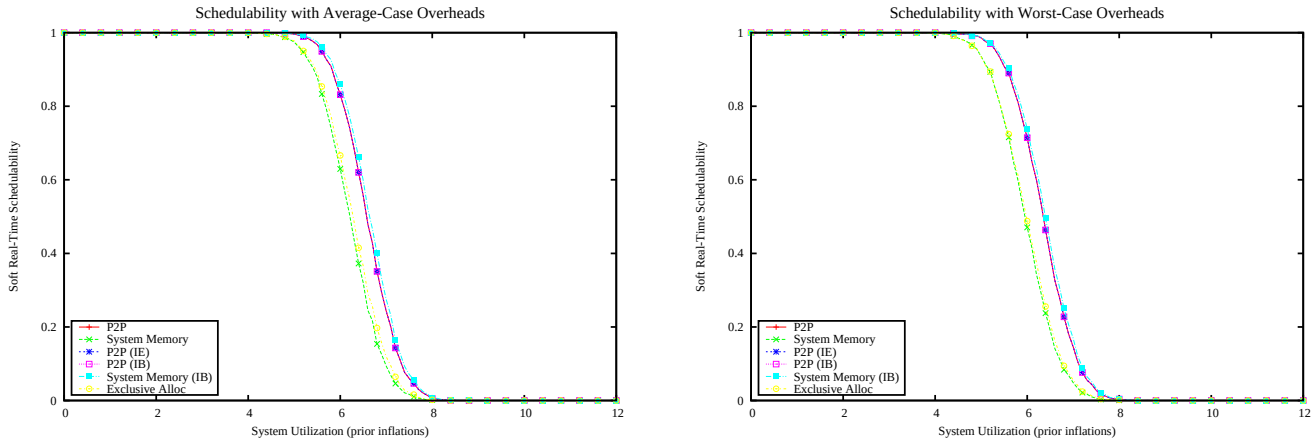

Figure 5087: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

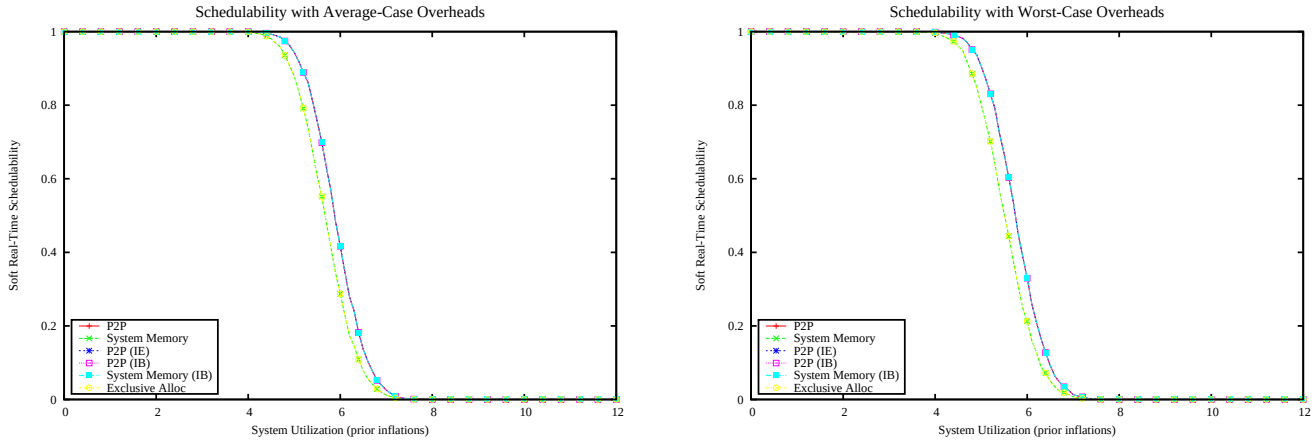

Figure 5088: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

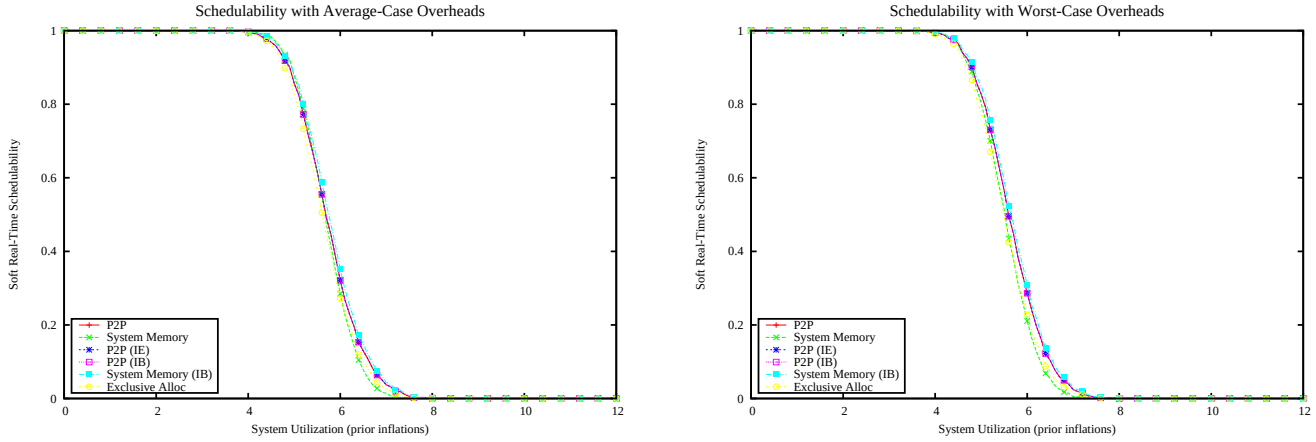

Figure 5089: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

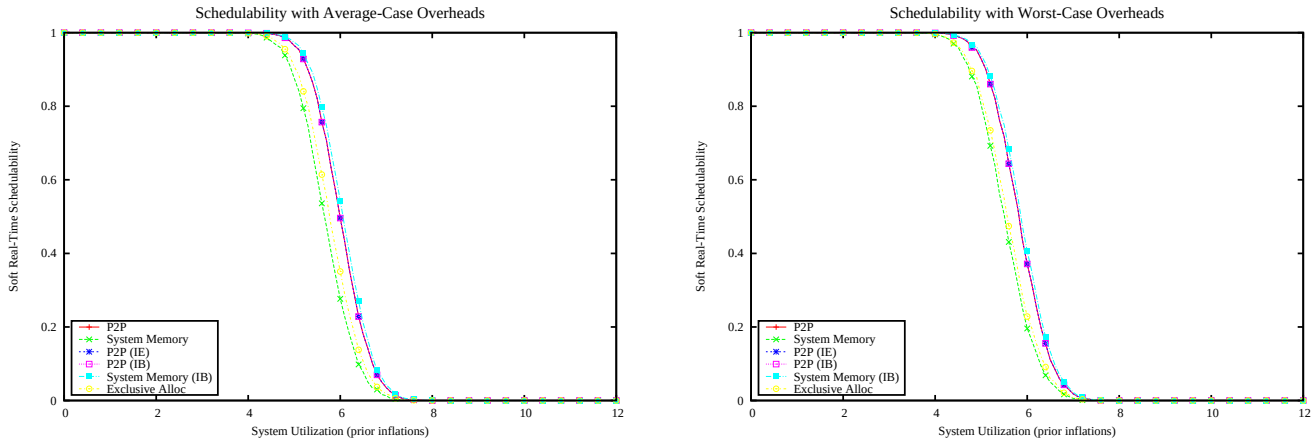

Figure 5090: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

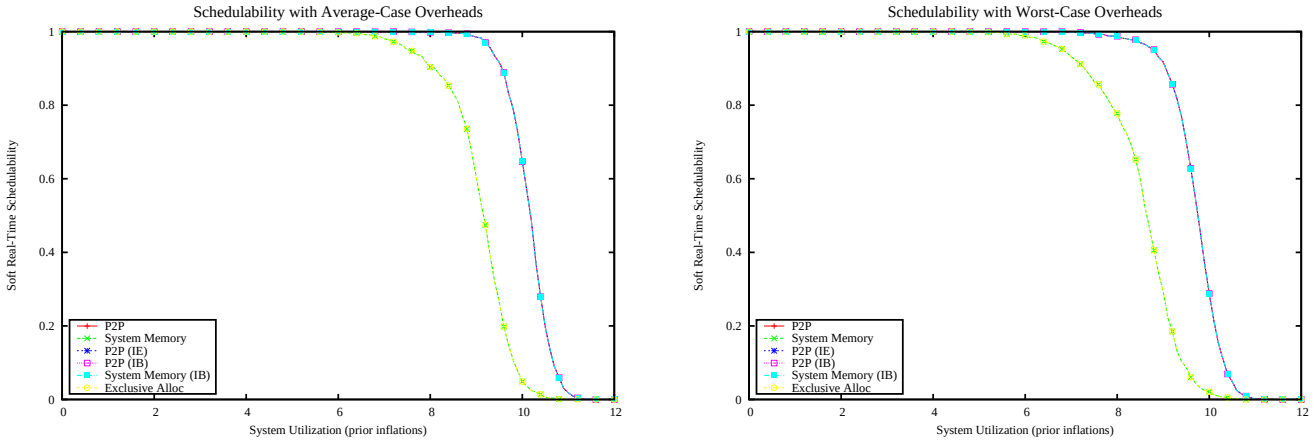

Figure 5091: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

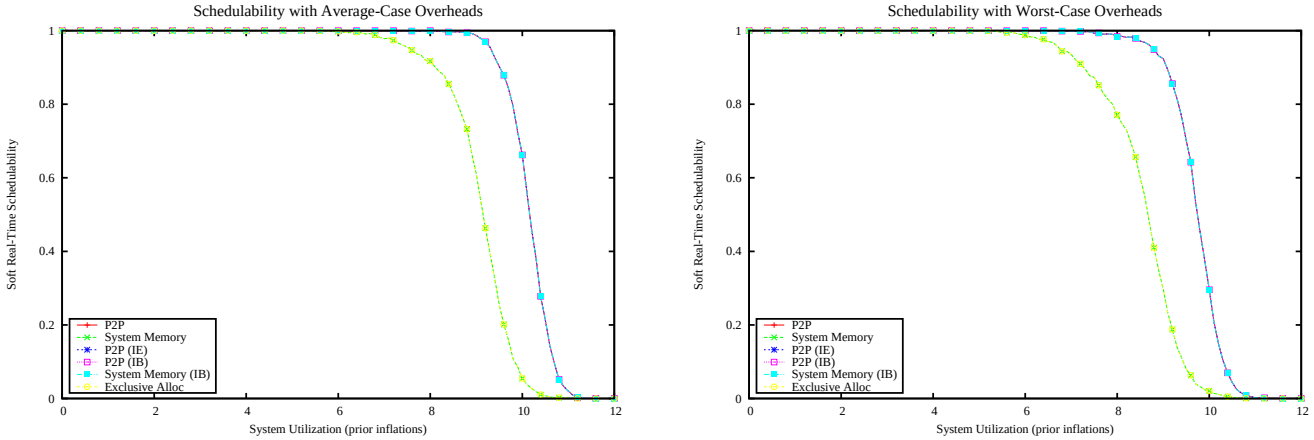

Figure 5092: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

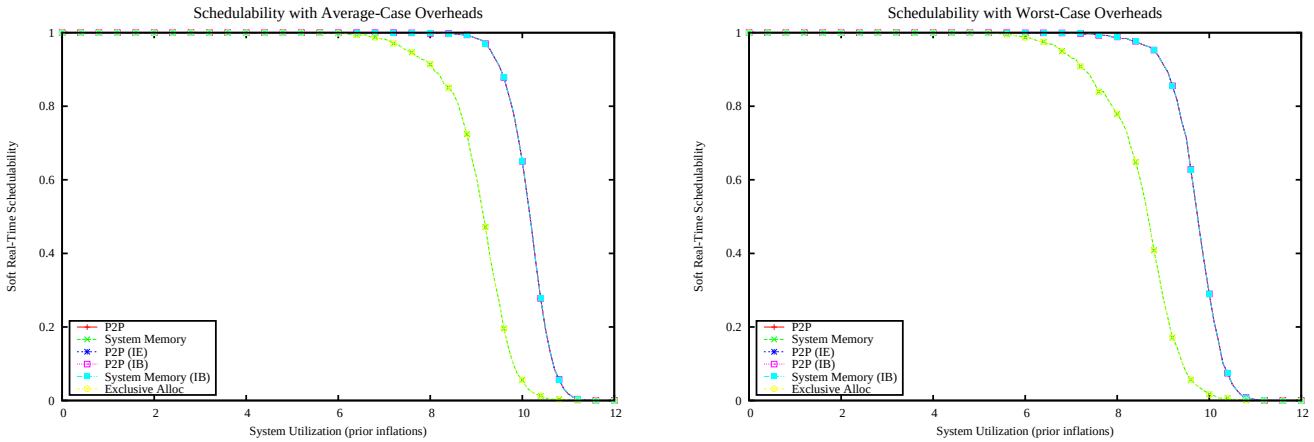

Figure 5093: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

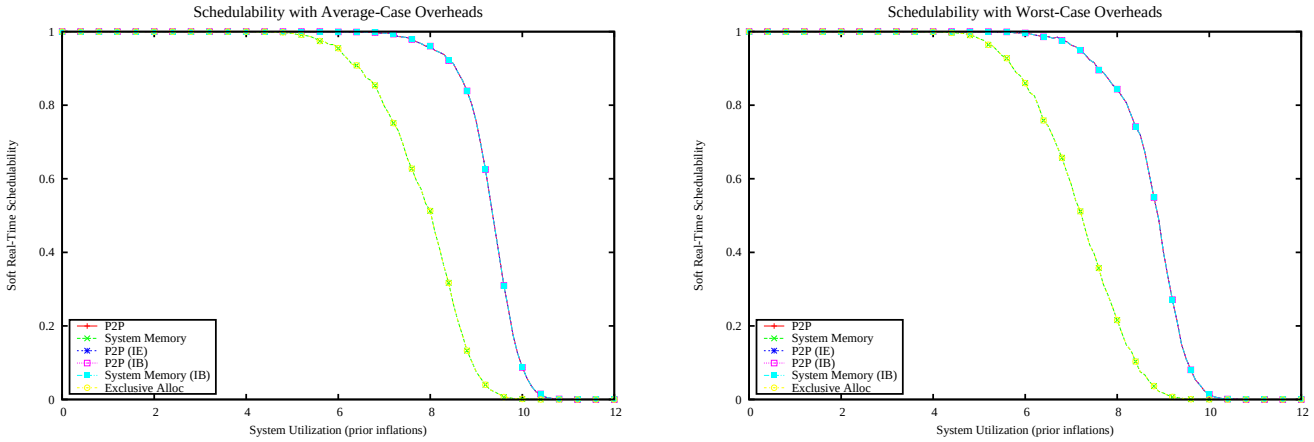

Figure 5094: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

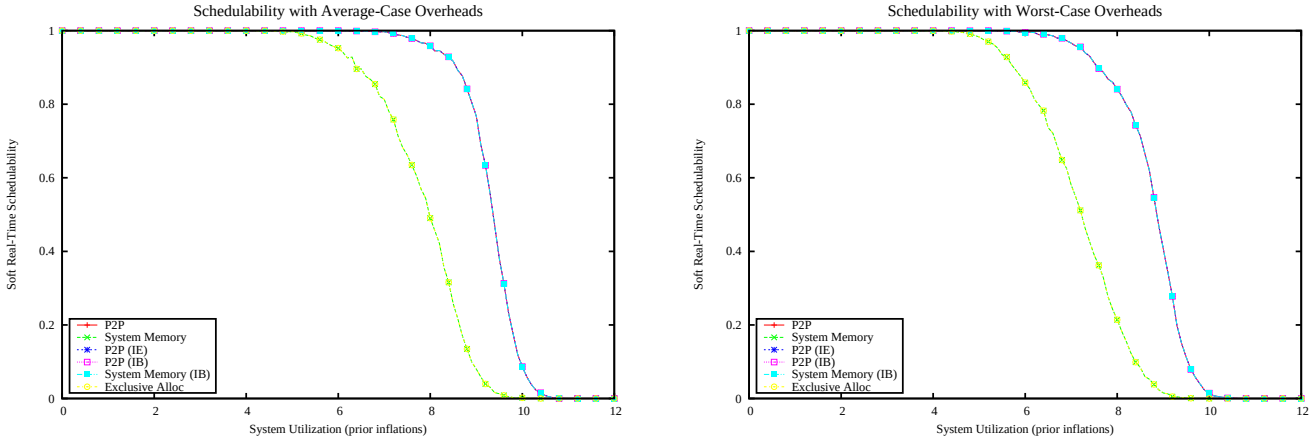

Figure 5095: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

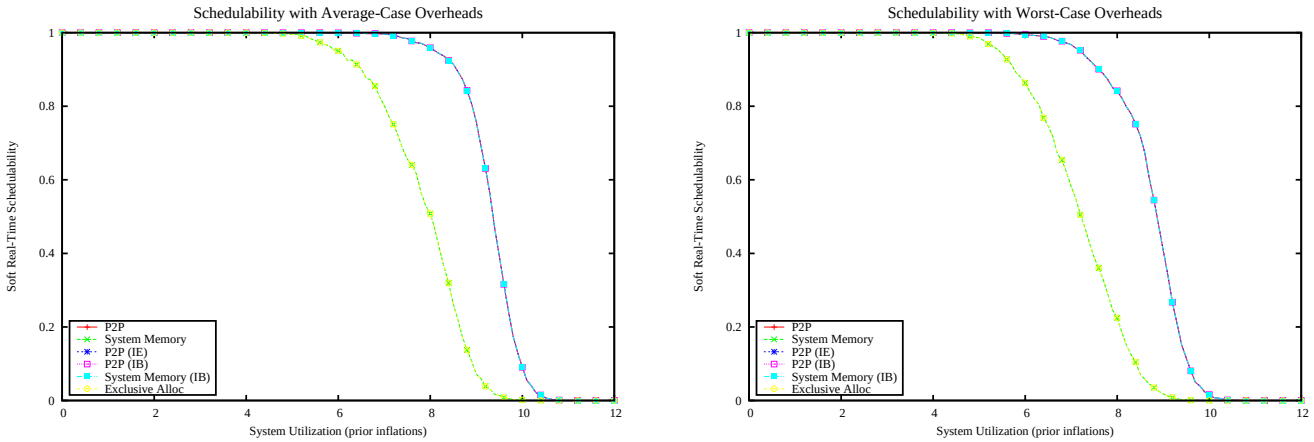

Figure 5096: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

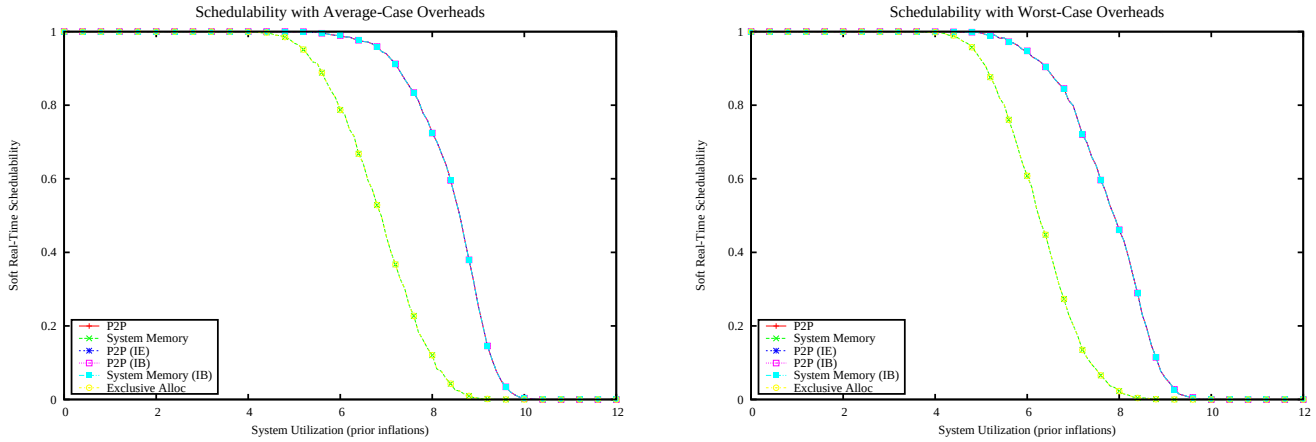

Figure 5097: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

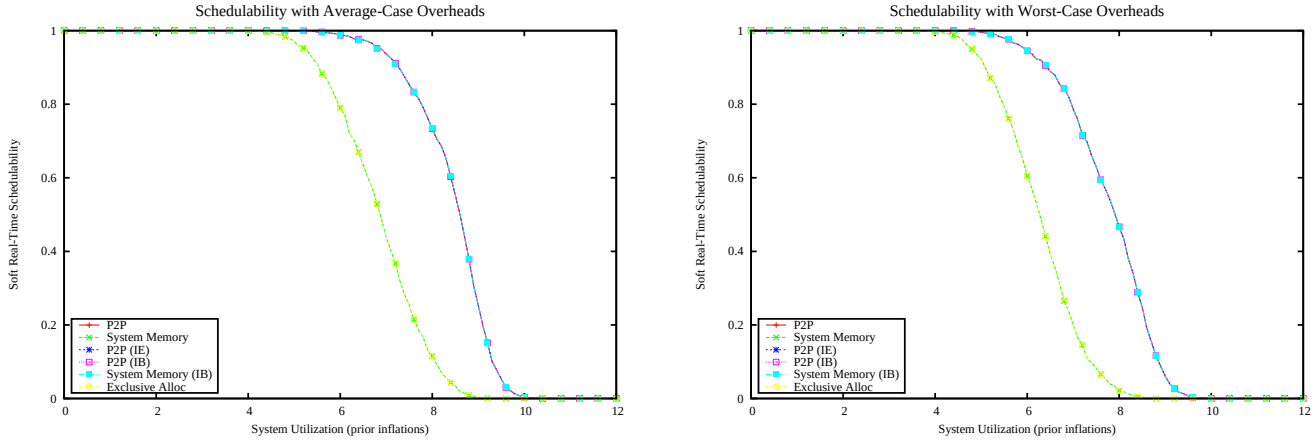

Figure 5098: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

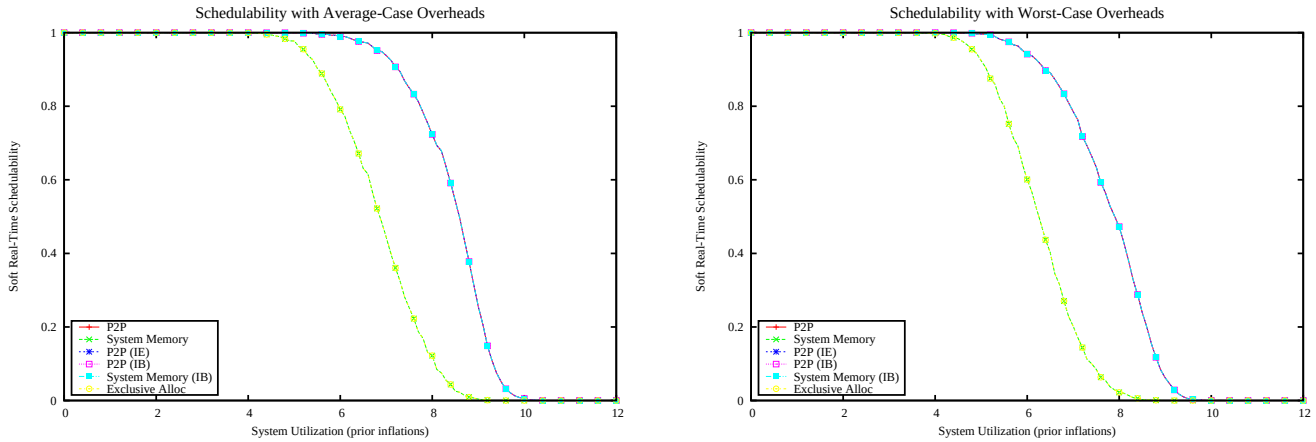

Figure 5099: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

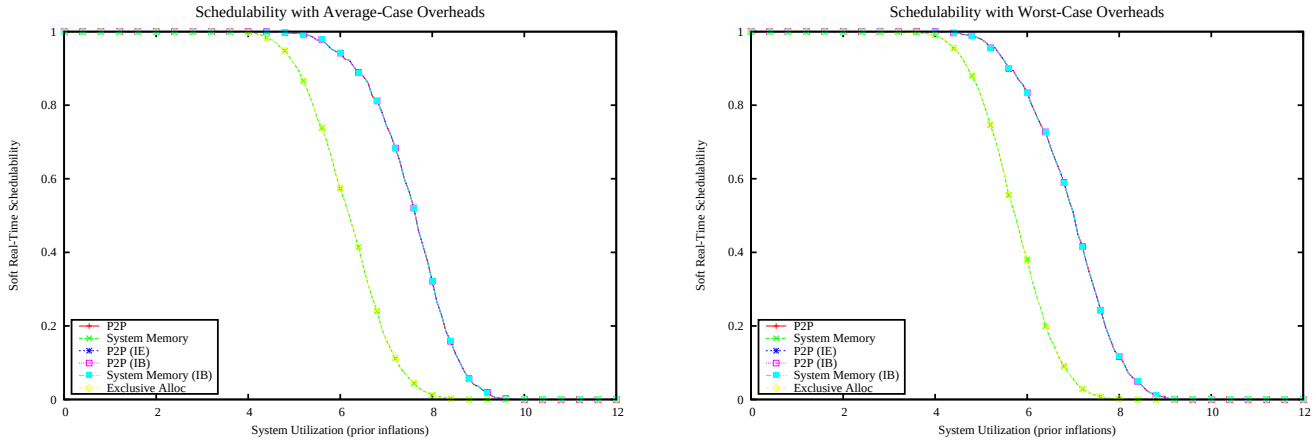

Figure 5100: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

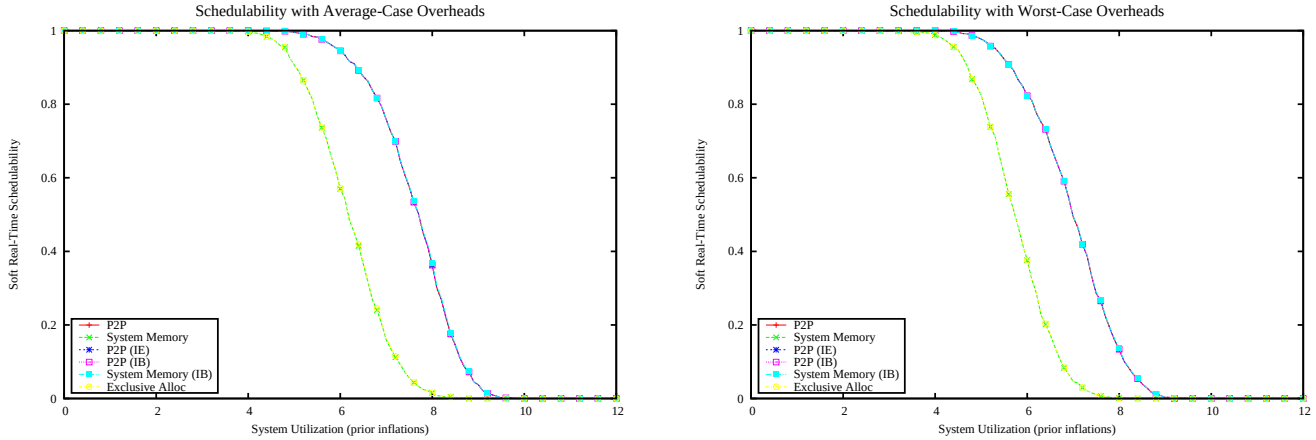

Figure 5101: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

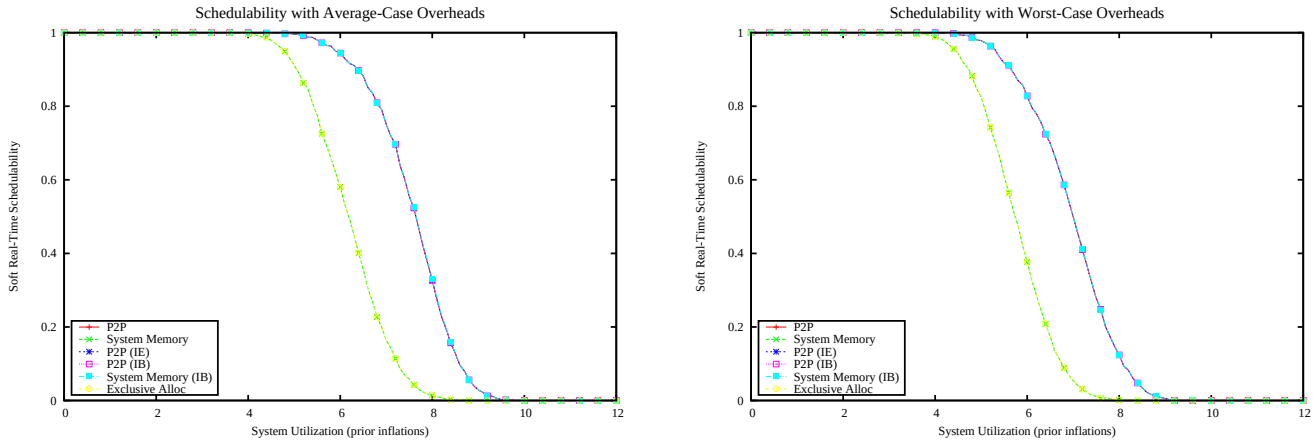

Figure 5102: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

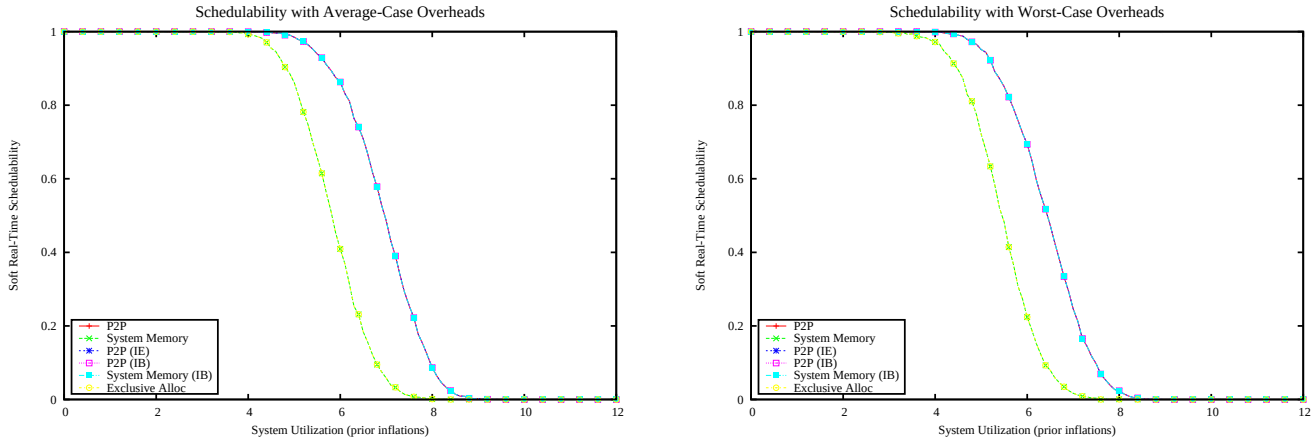

Figure 5103: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

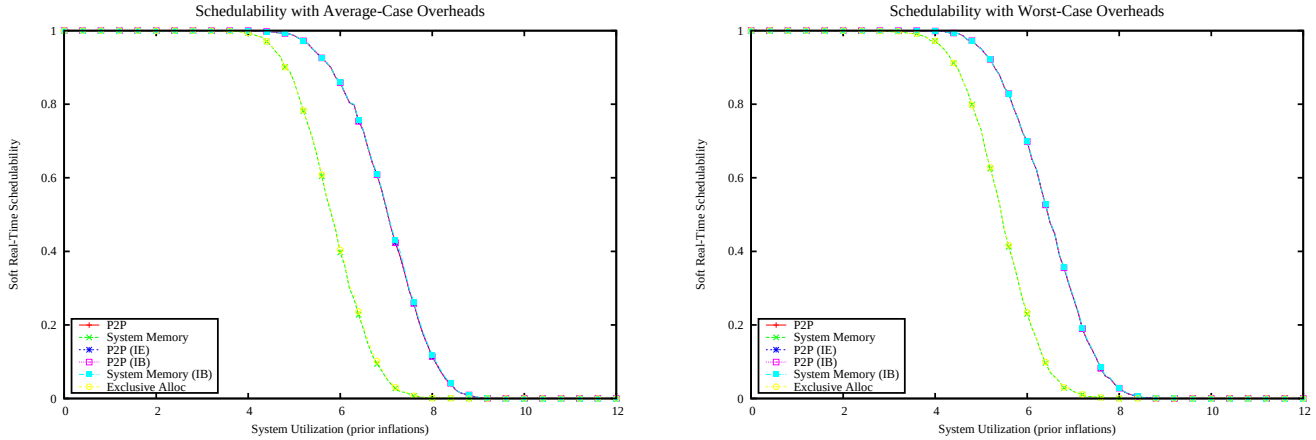

Figure 5104: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

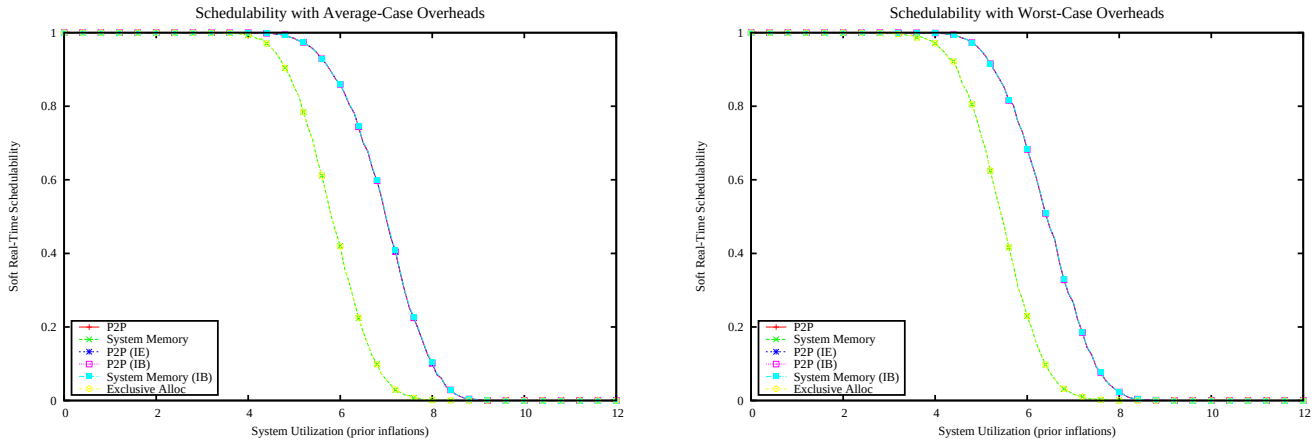

Figure 5105: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

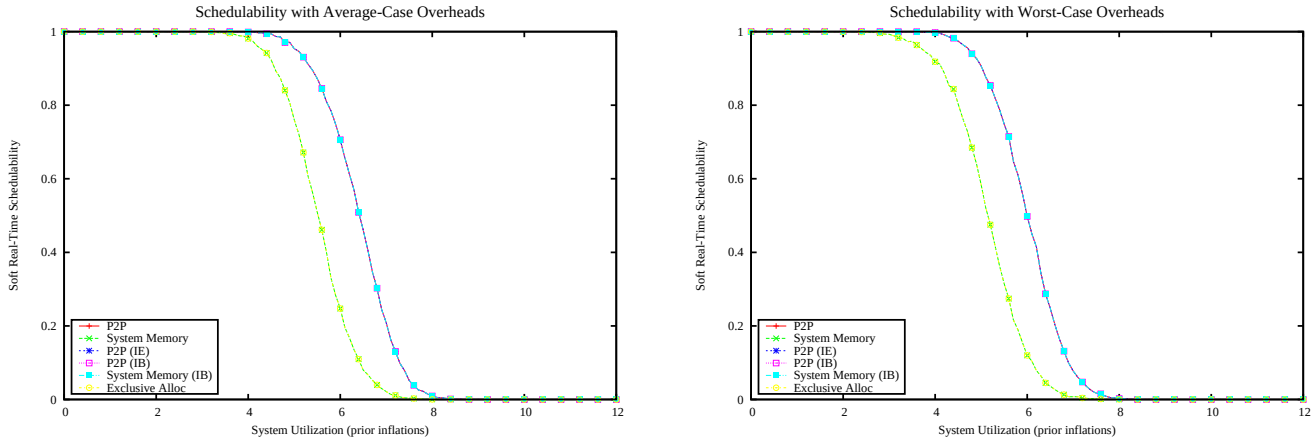

Figure 5106: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

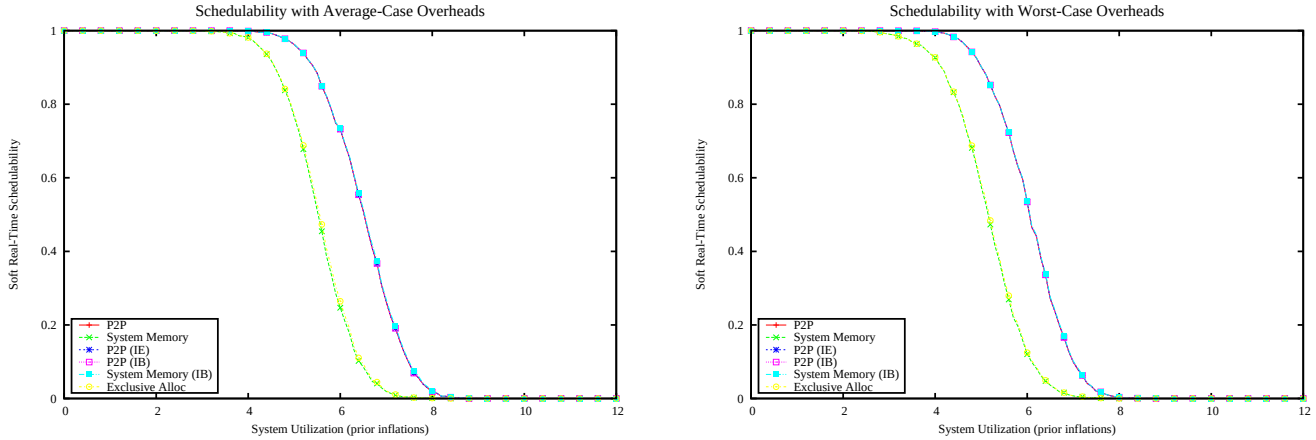

Figure 5107: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

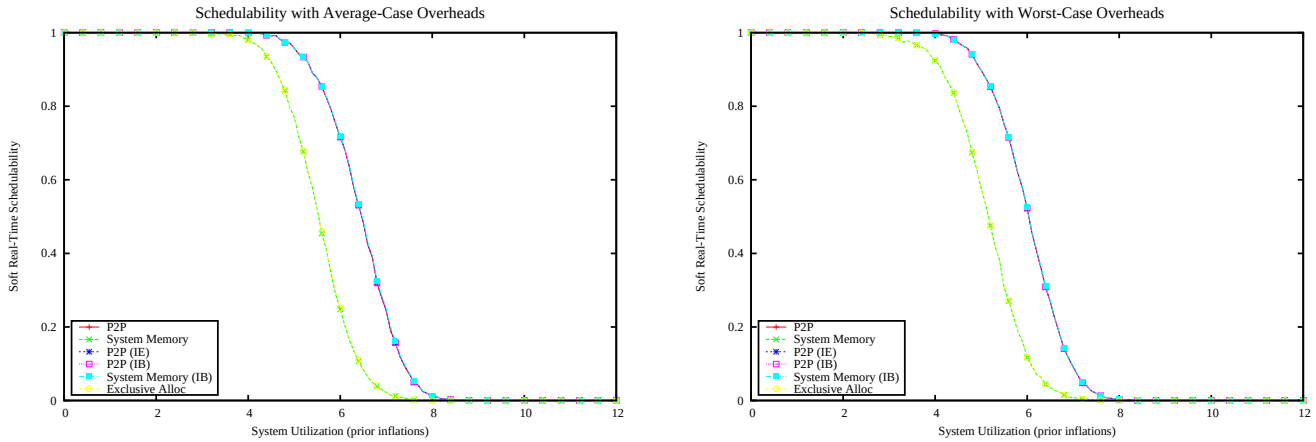

Figure 5108: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

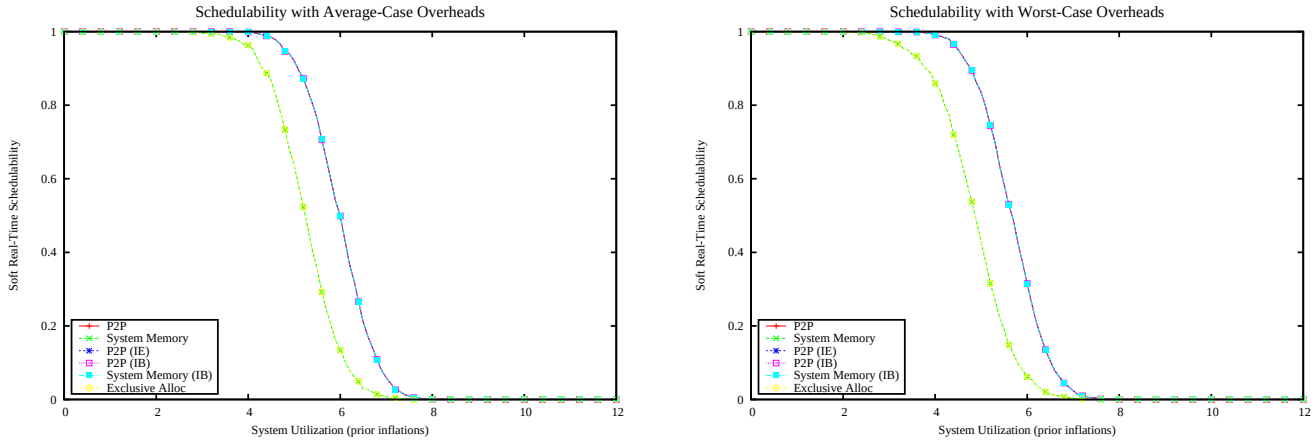

Figure 5109: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

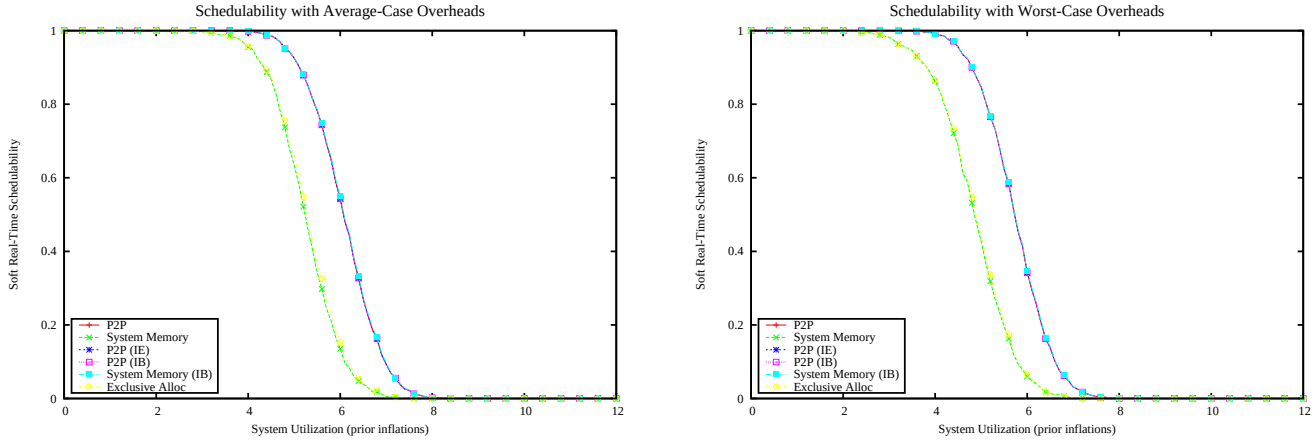

Figure 5110: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

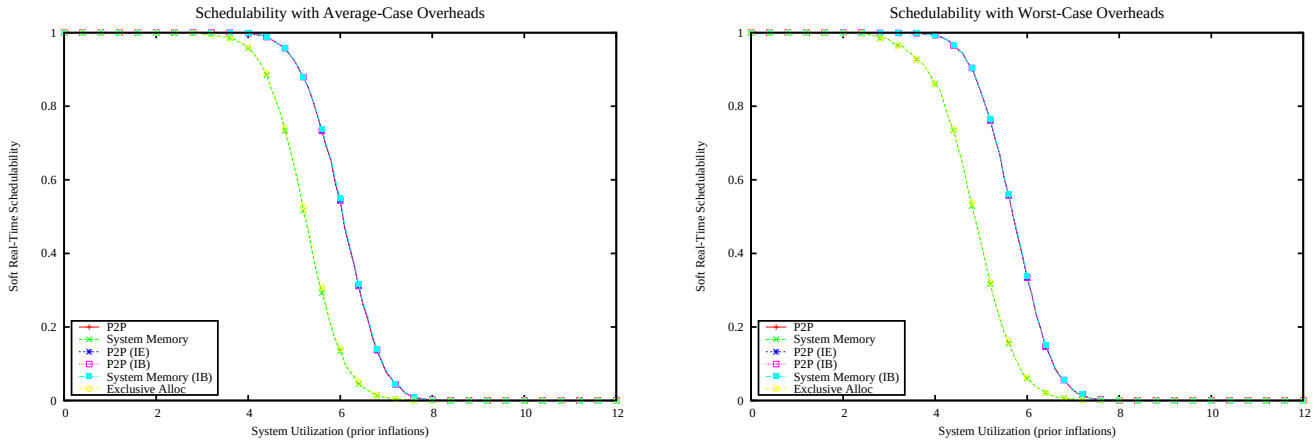

Figure 5111: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

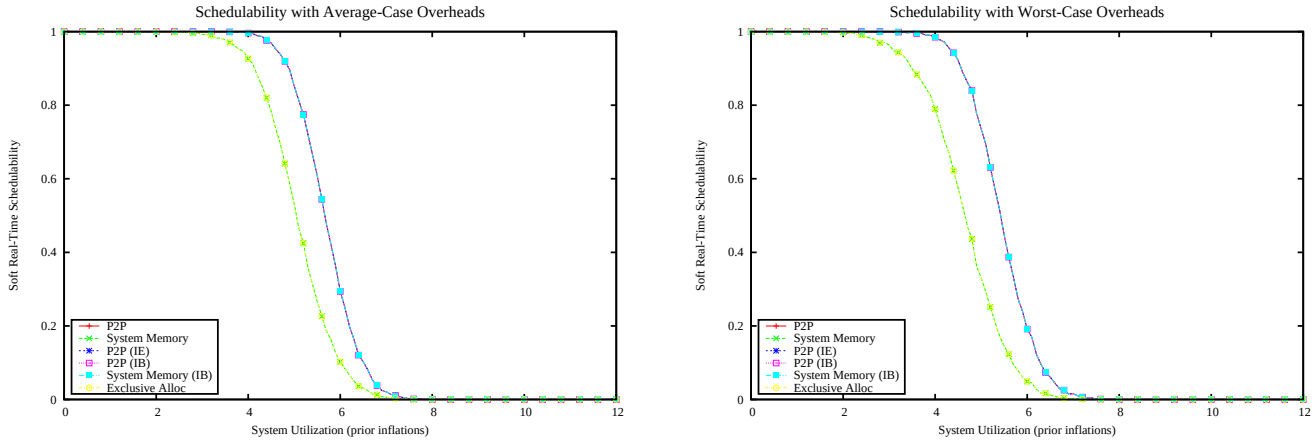

Figure 5112: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

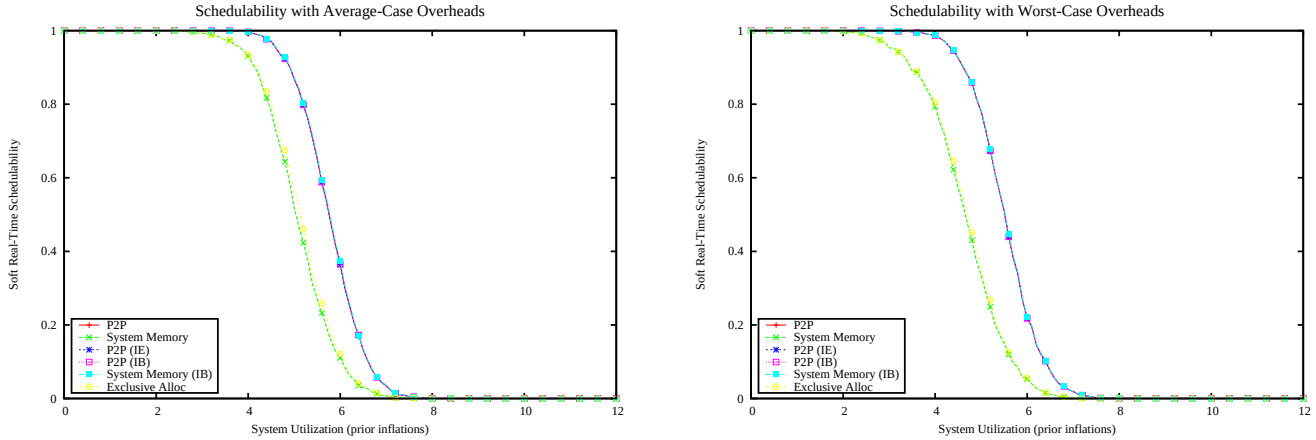

Figure 5113: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

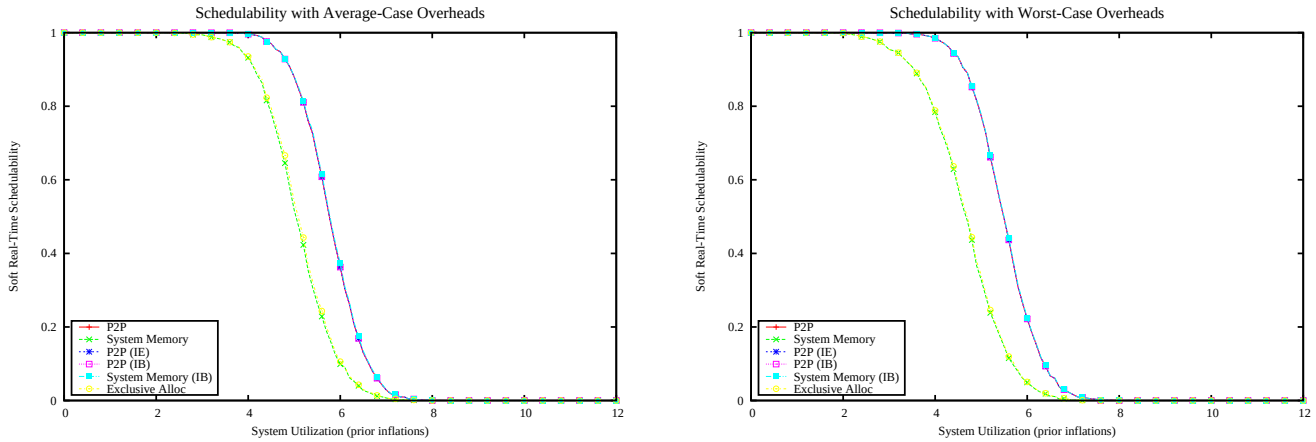

Figure 5114: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

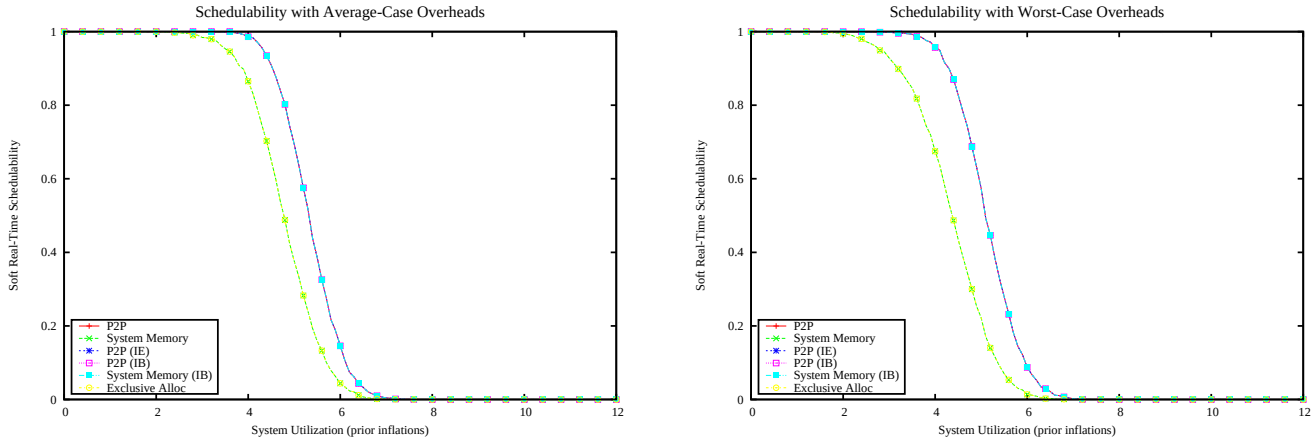

Figure 5115: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

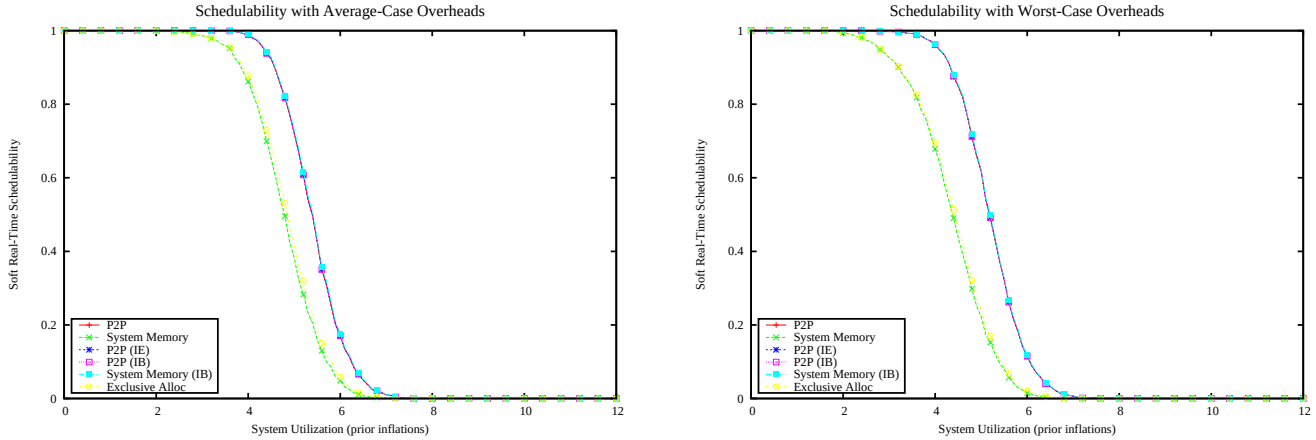

Figure 5116: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

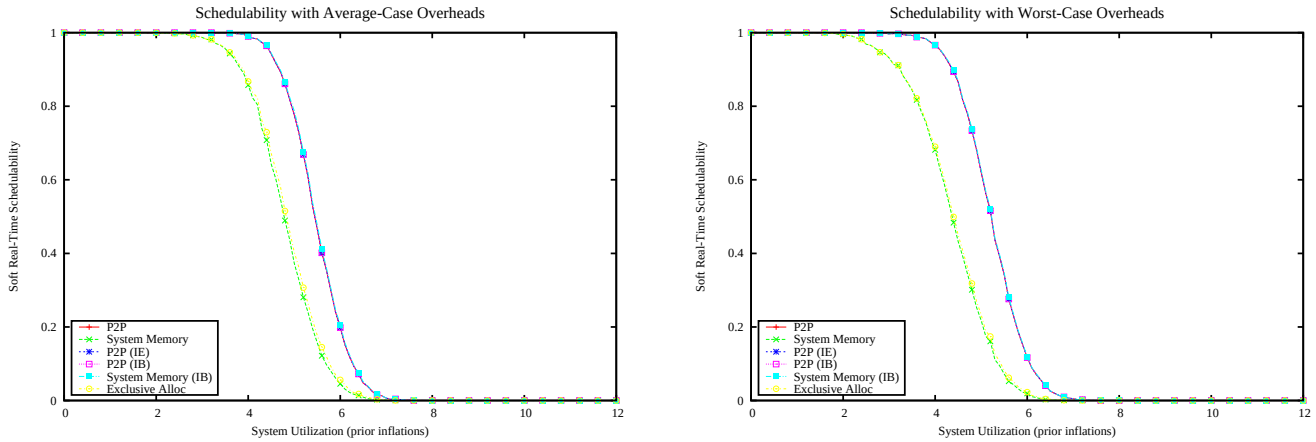

Figure 5117: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

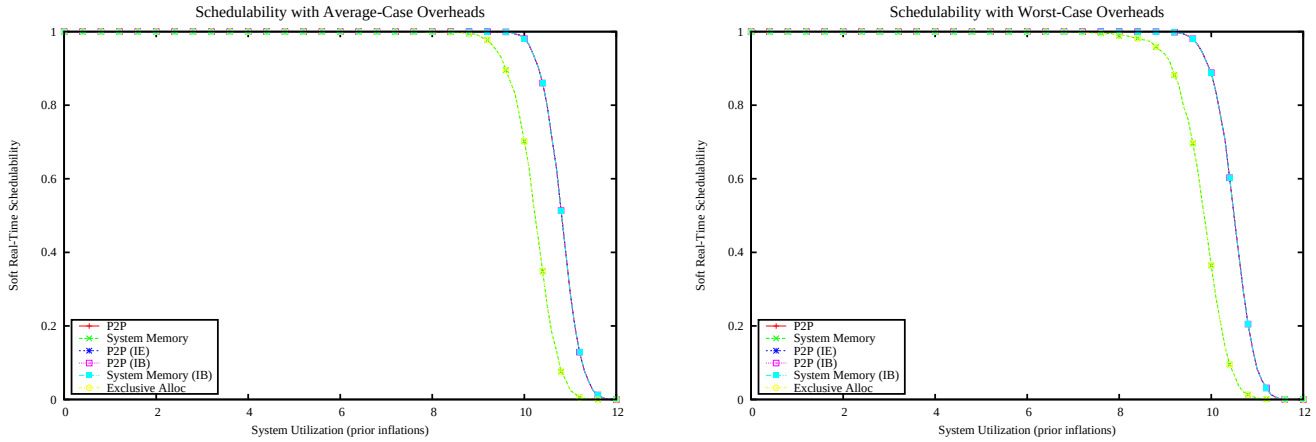

Figure 5118: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

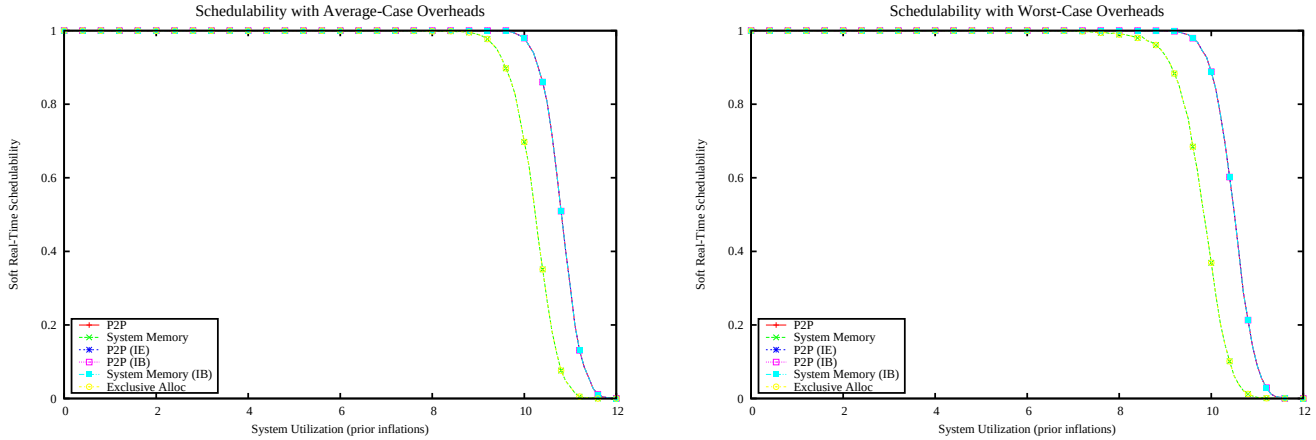

Figure 5119: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

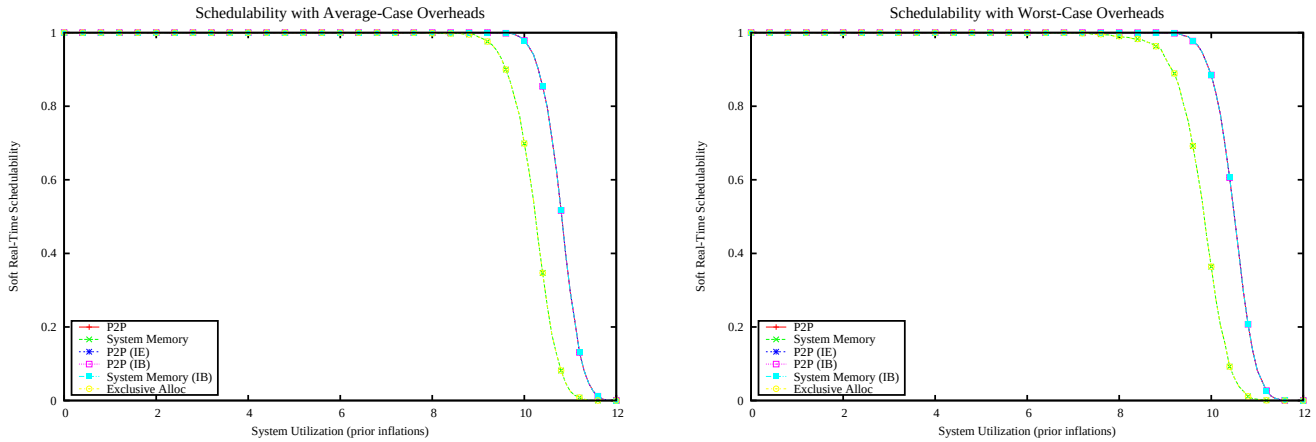

Figure 5120: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

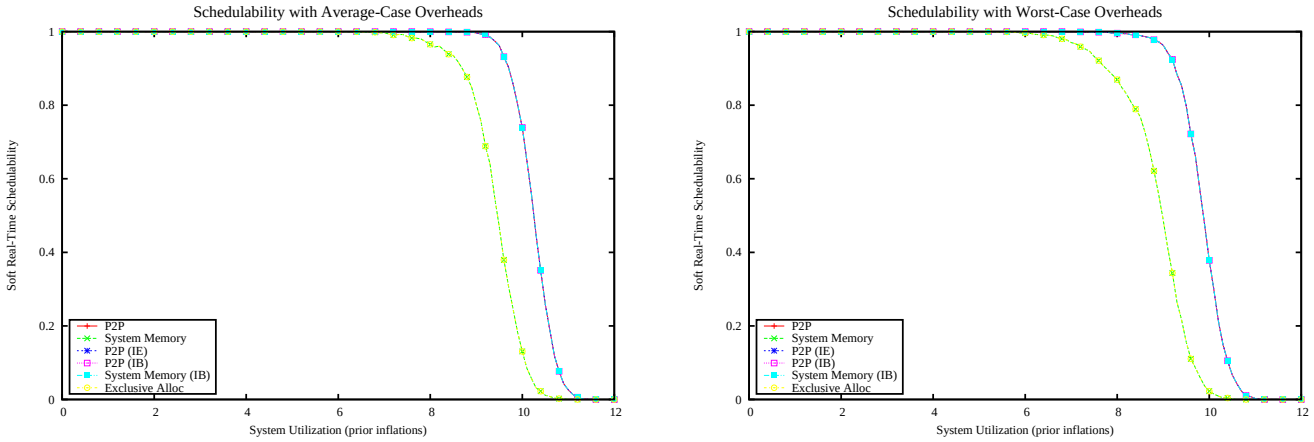

Figure 5121: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

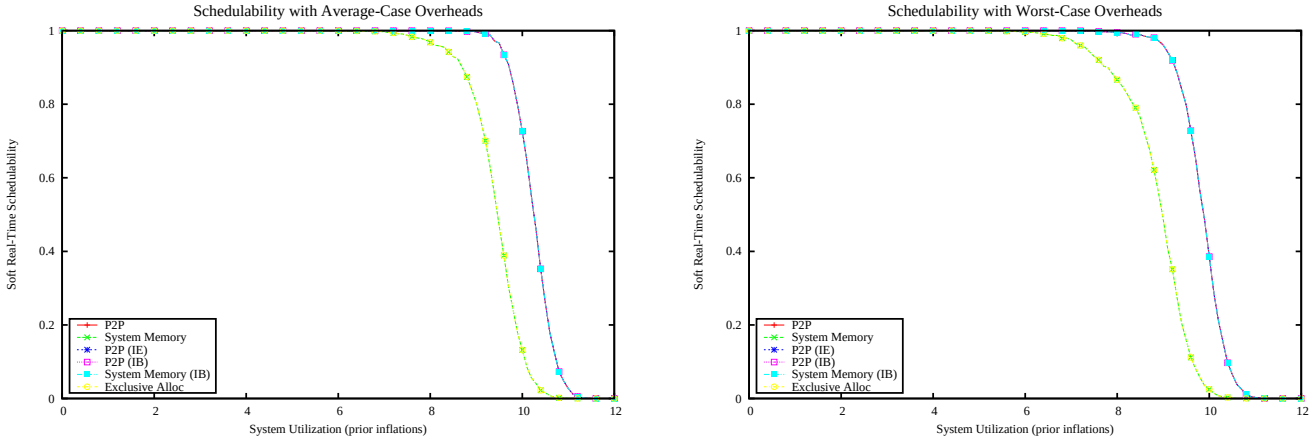

Figure 5122: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

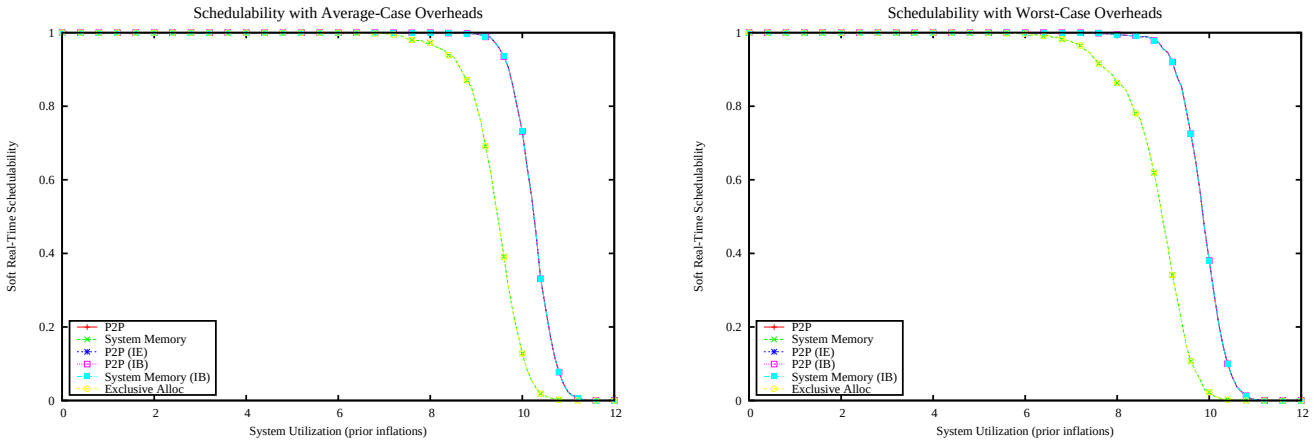

Figure 5123: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

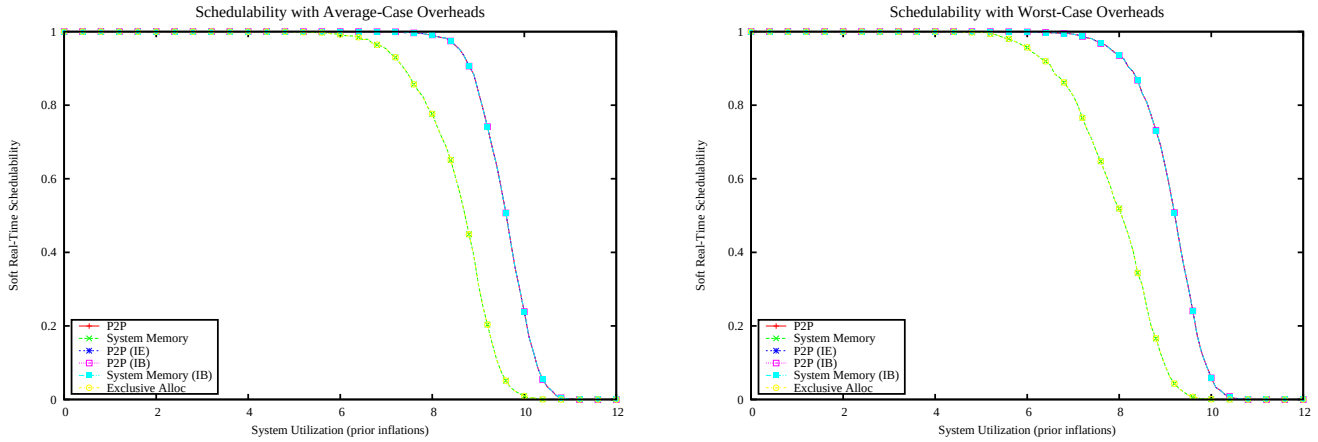

Figure 5124: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

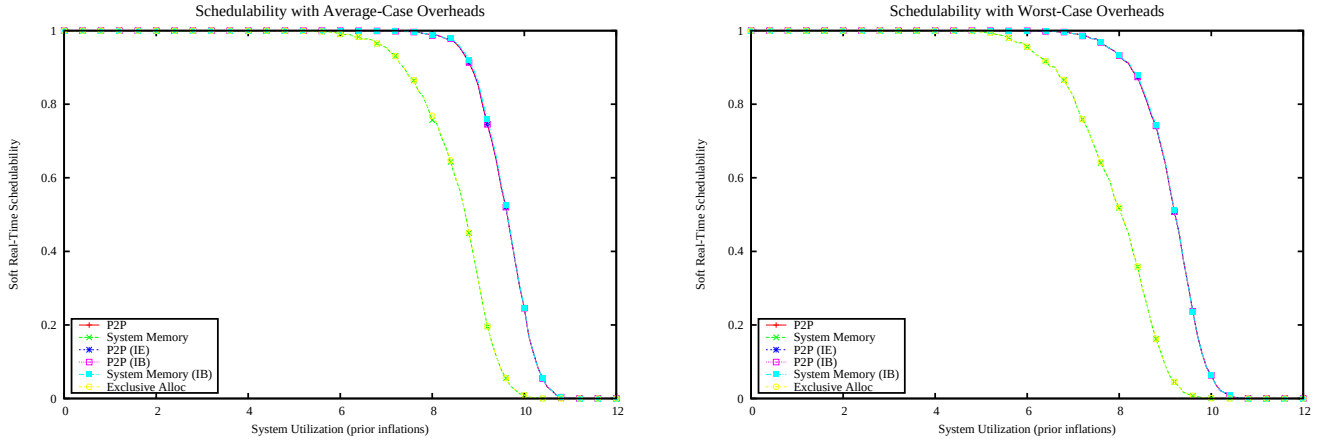

Figure 5125: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

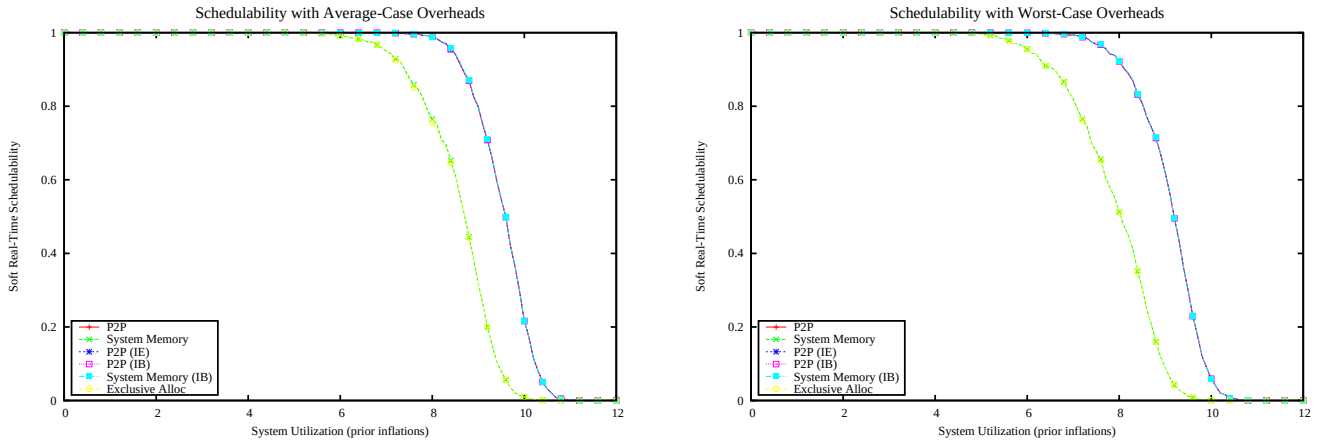

Figure 5126: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

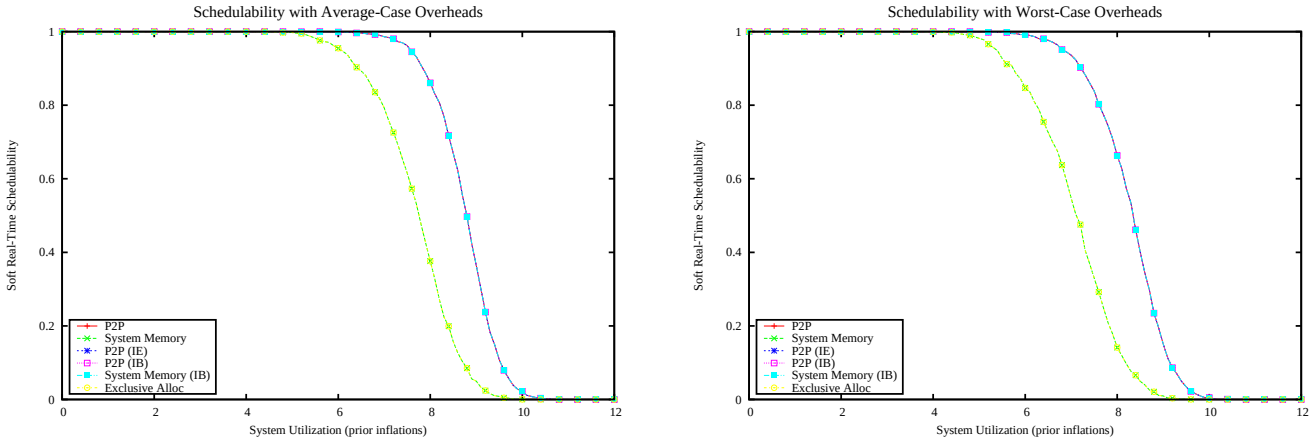

Figure 5127: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

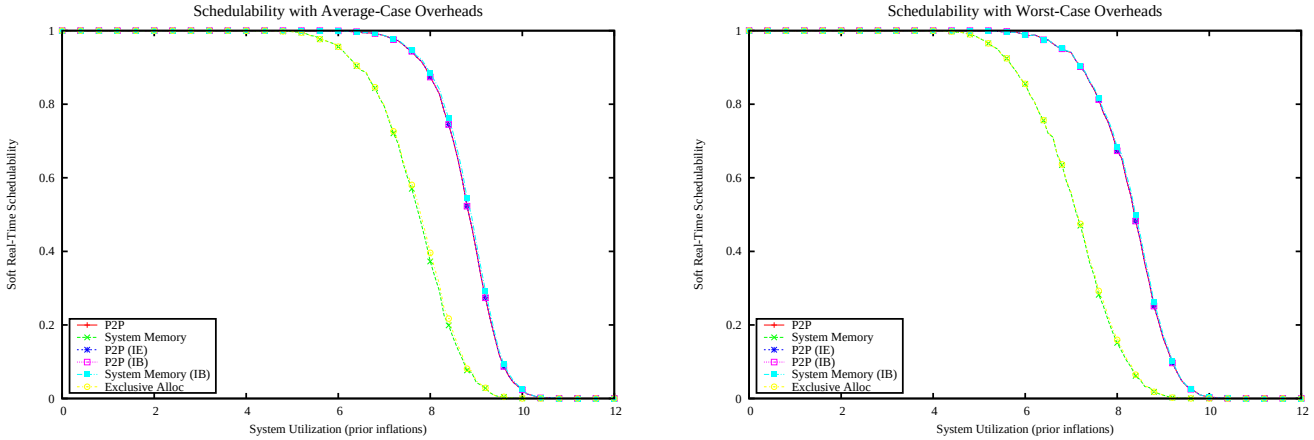

Figure 5128: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

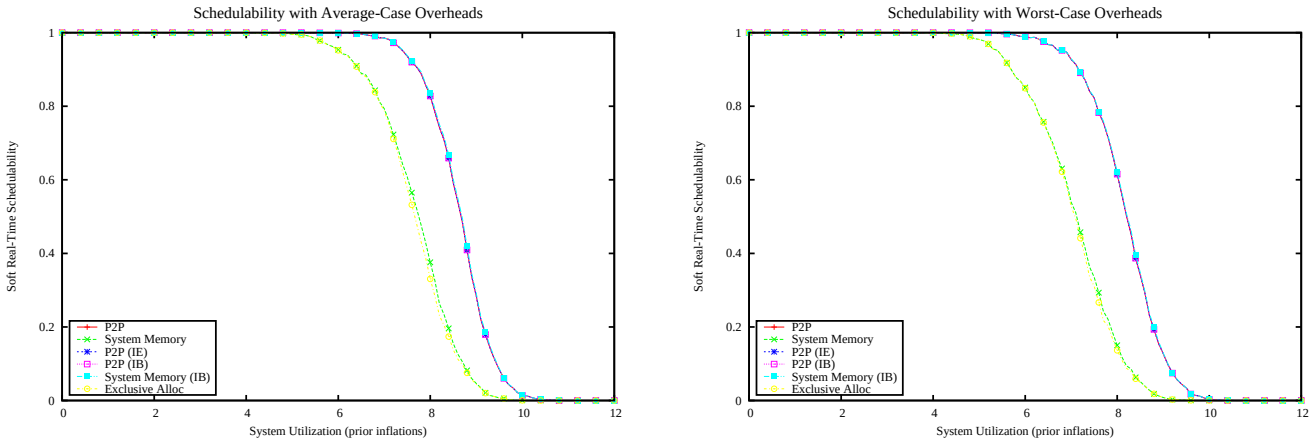

Figure 5129: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

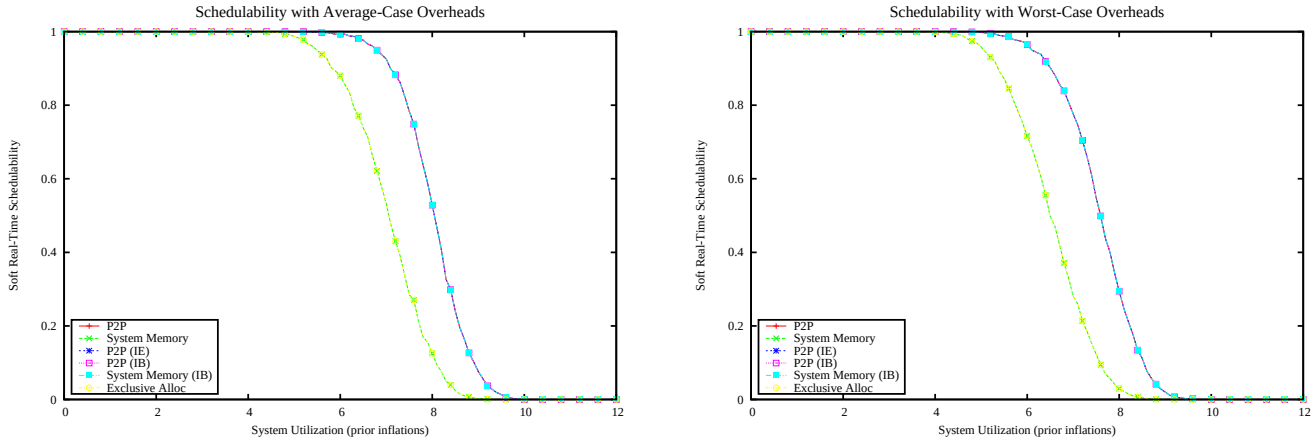

Figure 5130: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

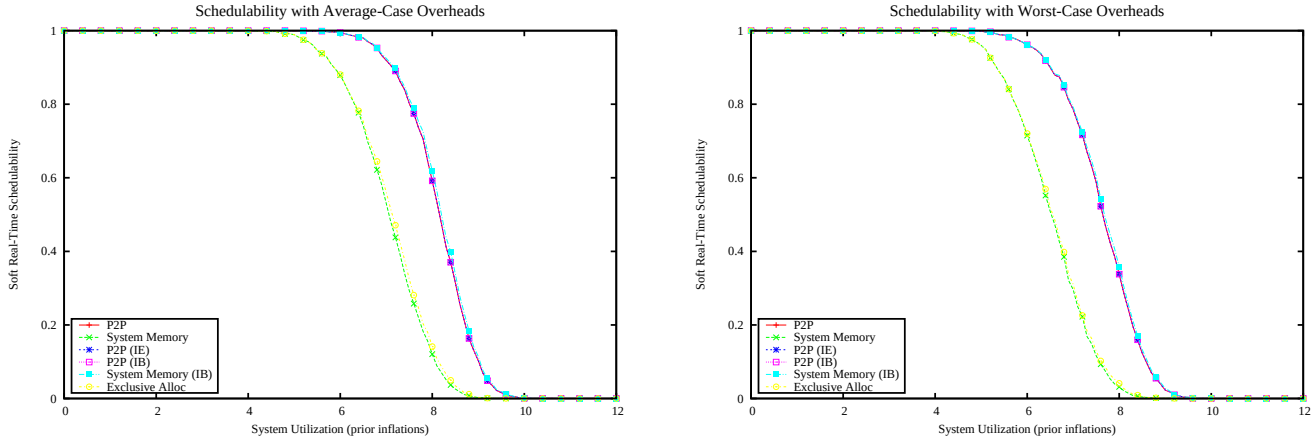

Figure 5131: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

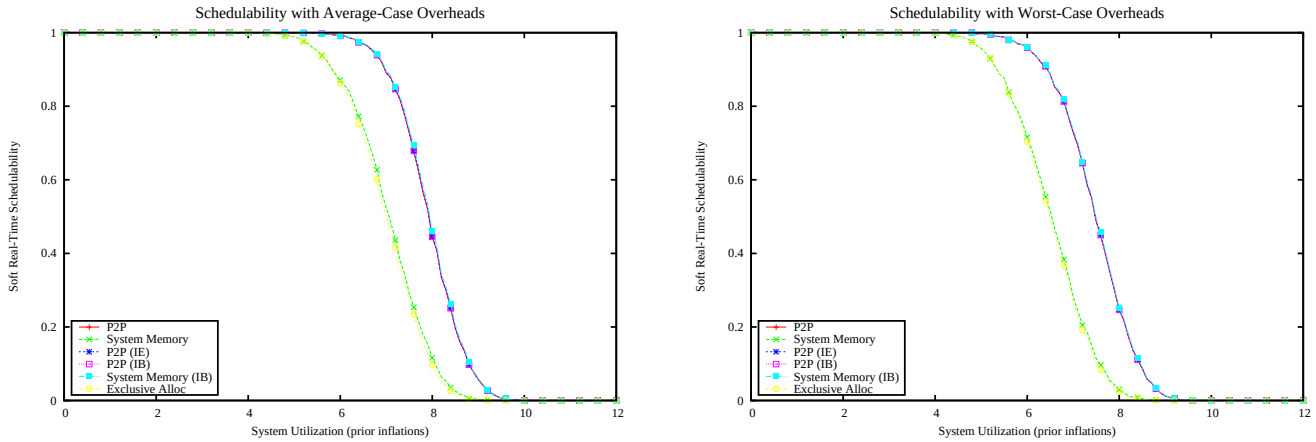

Figure 5132: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

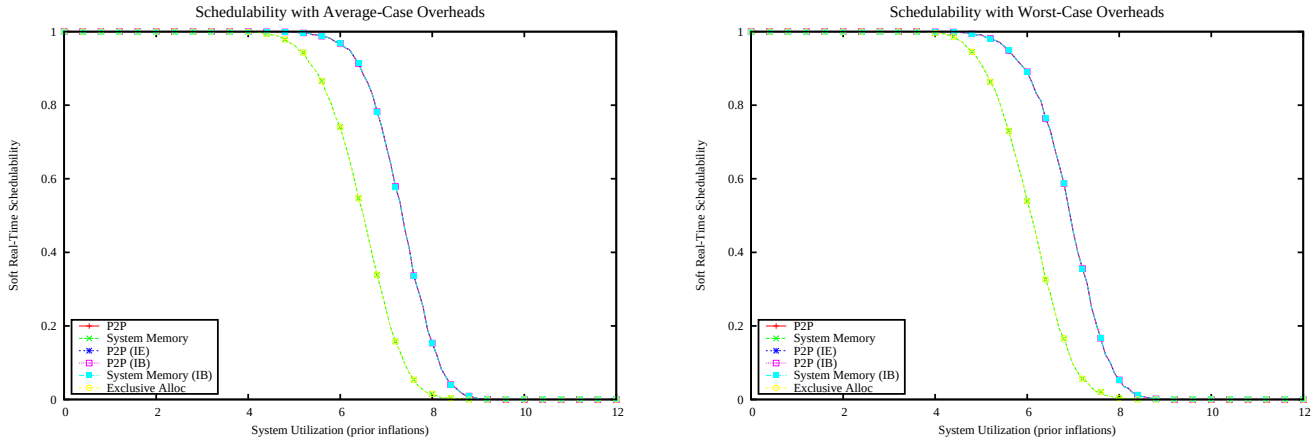

Figure 5133: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

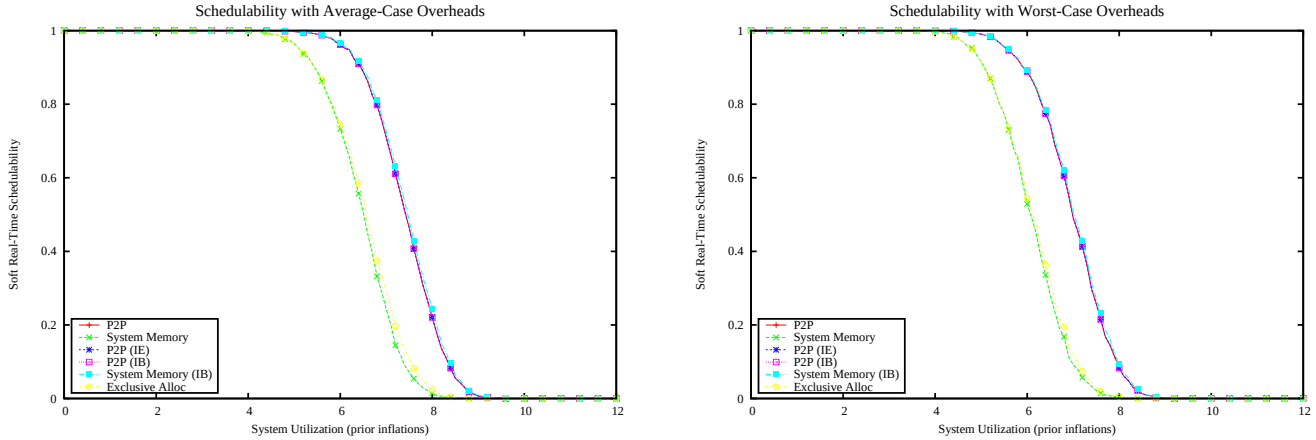

Figure 5134: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

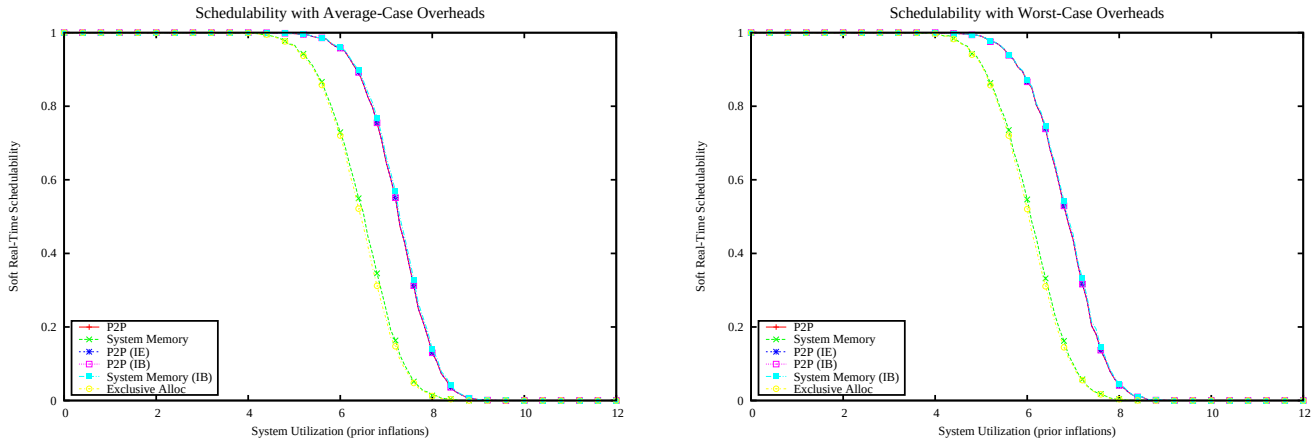

Figure 5135: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

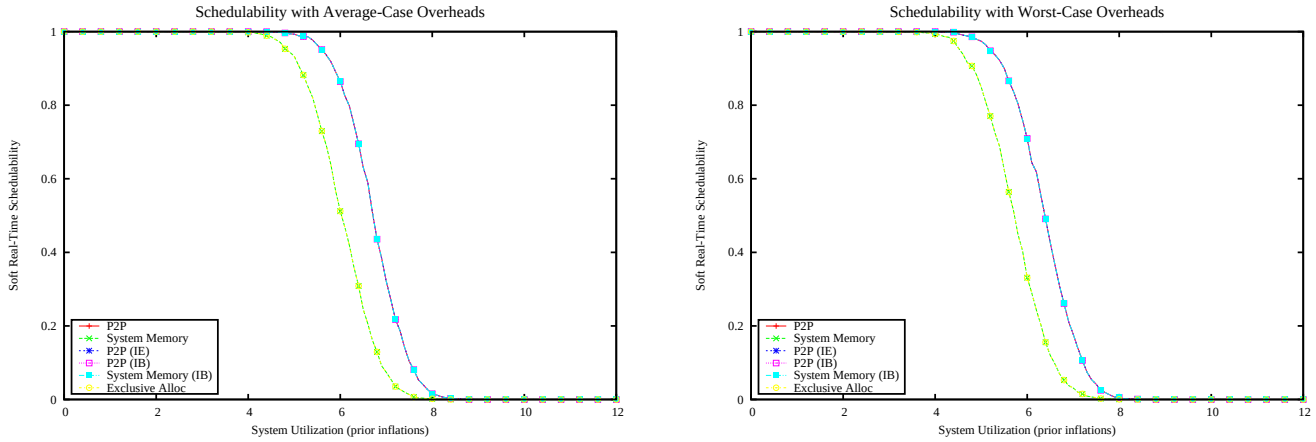

Figure 5136: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

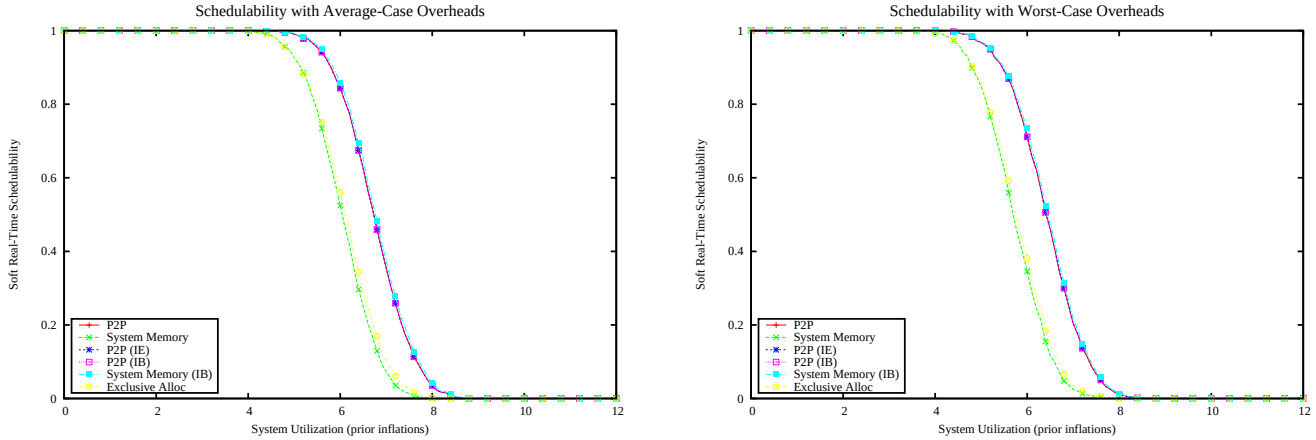

Figure 5137: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

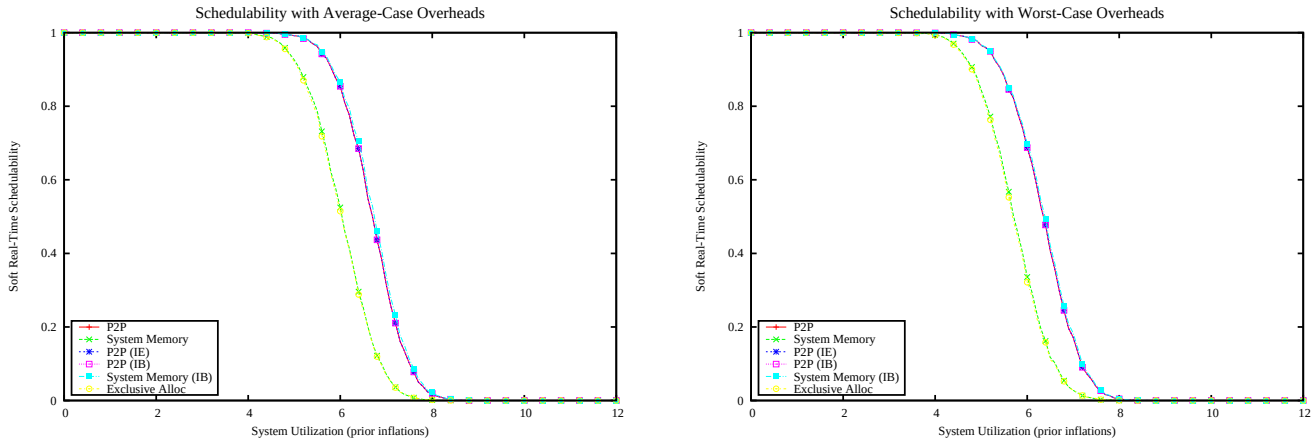

Figure 5138: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

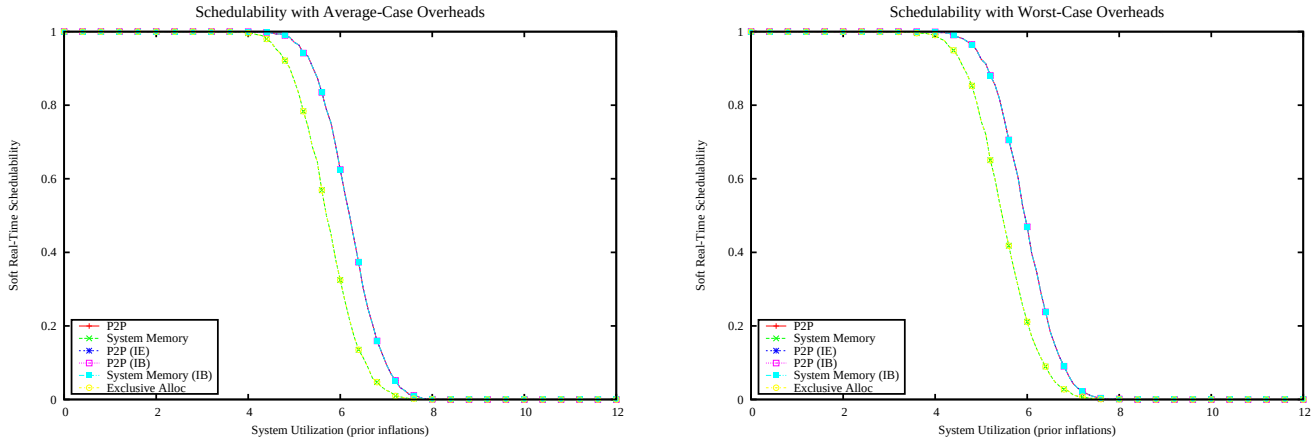

Figure 5139: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

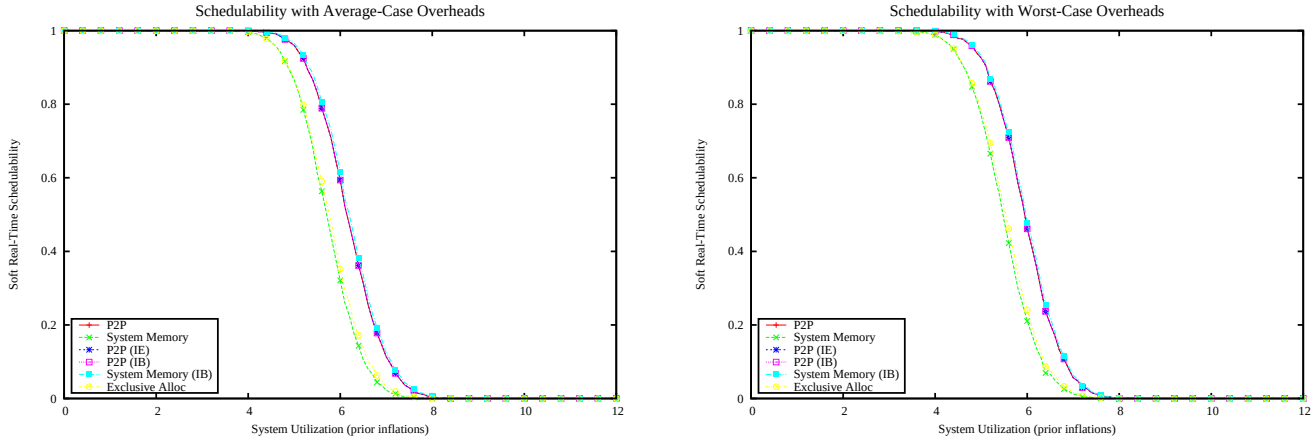

Figure 5140: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

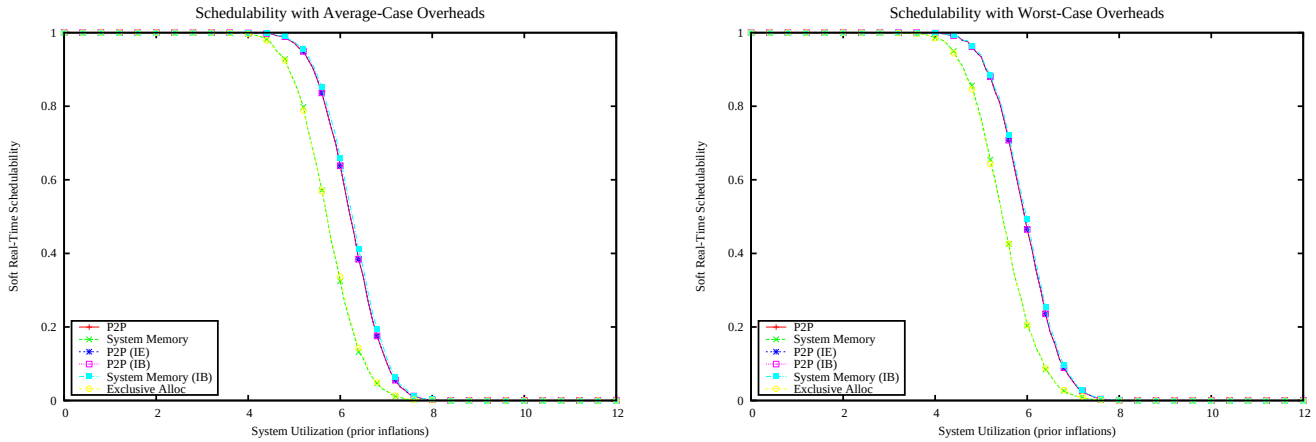

Figure 5141: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

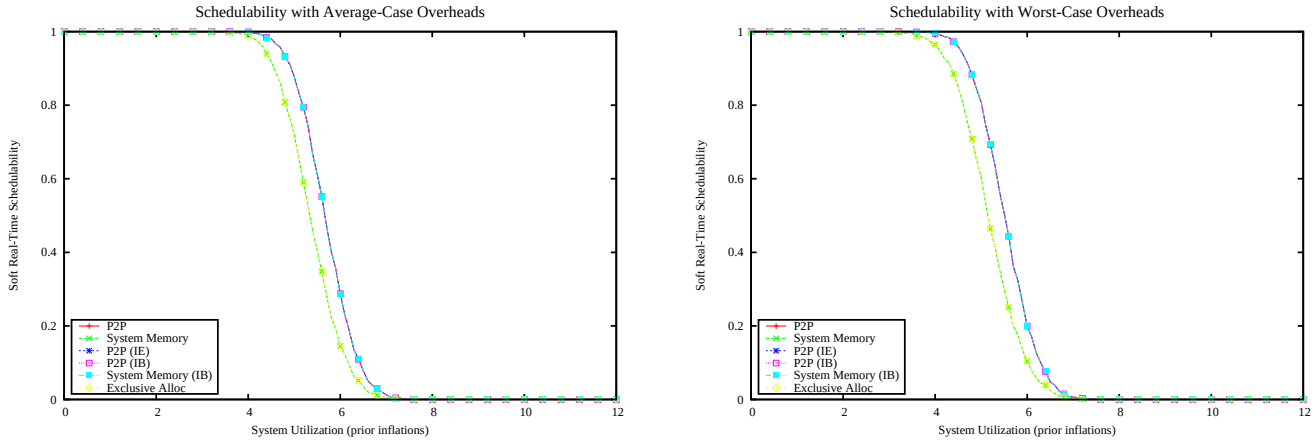

Figure 5142: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

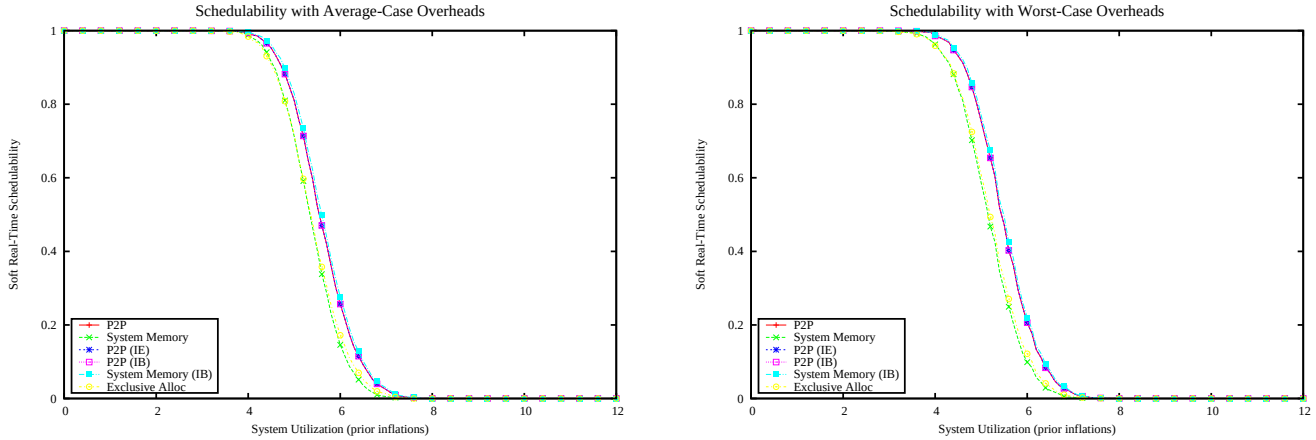

Figure 5143: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

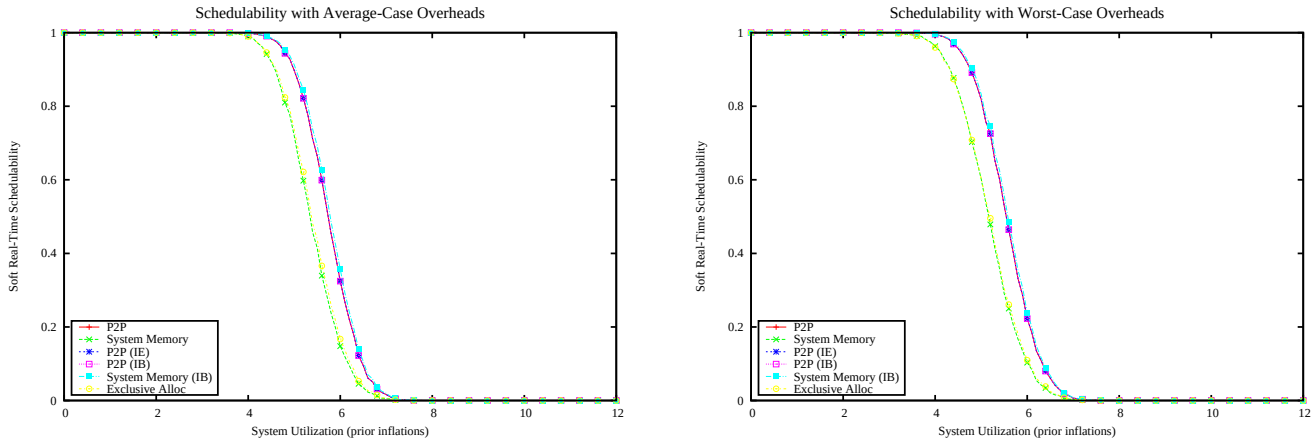

Figure 5144: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

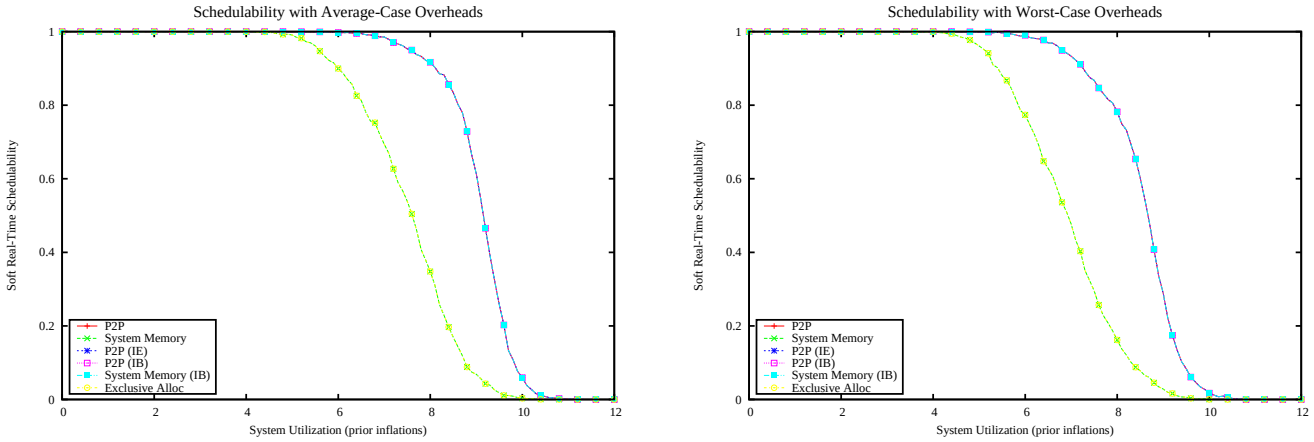

Figure 5145: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

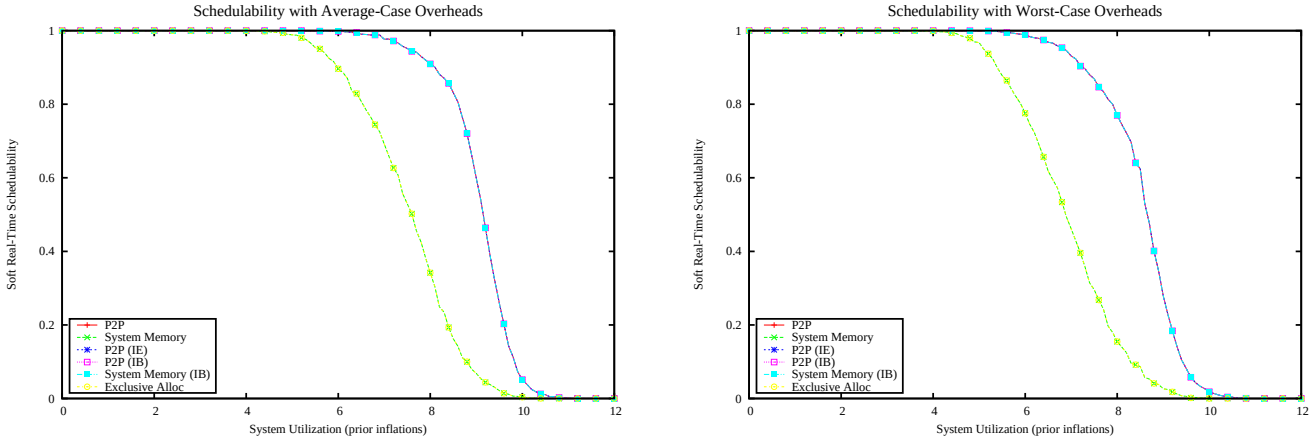

Figure 5146: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

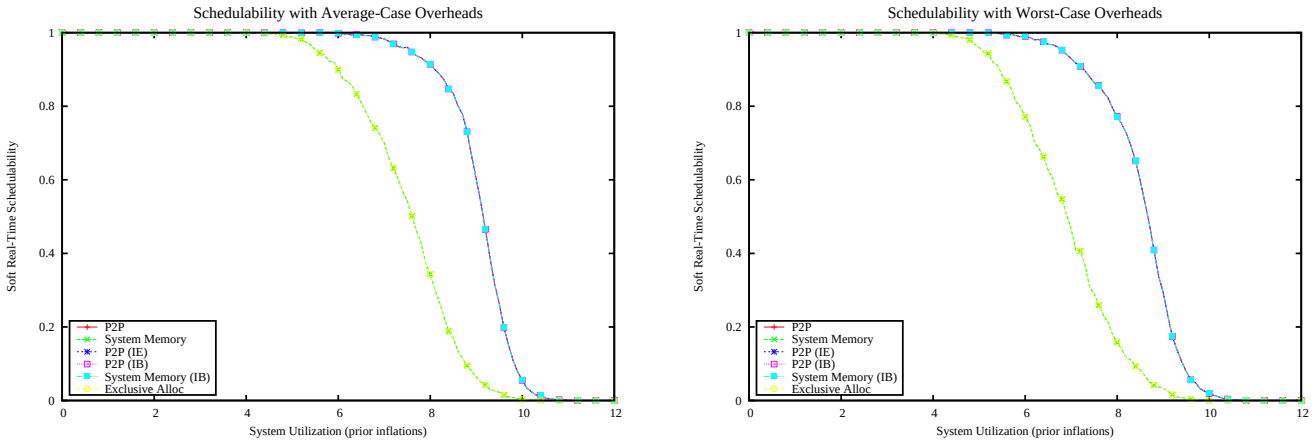

Figure 5147: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

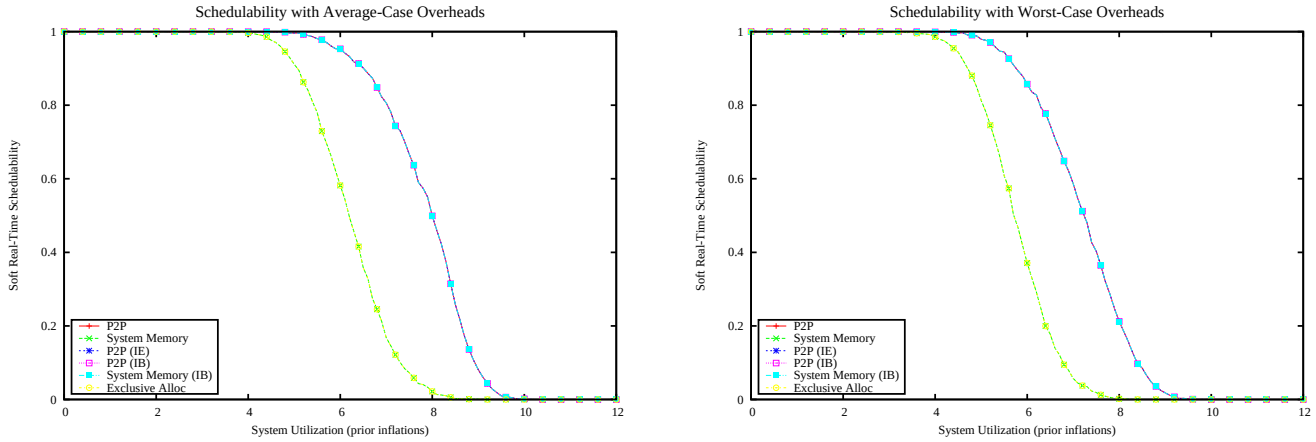

Figure 5148: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

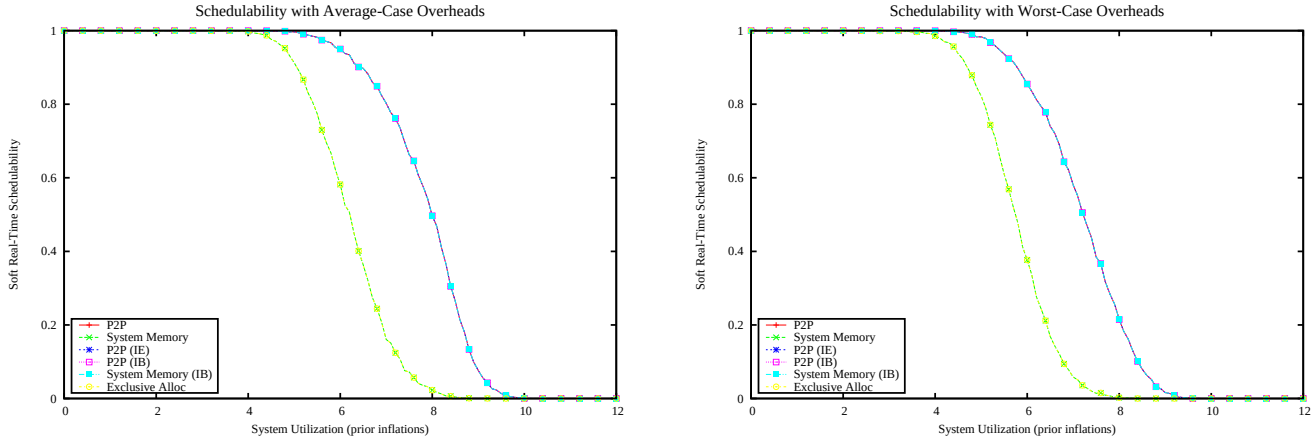

Figure 5149: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

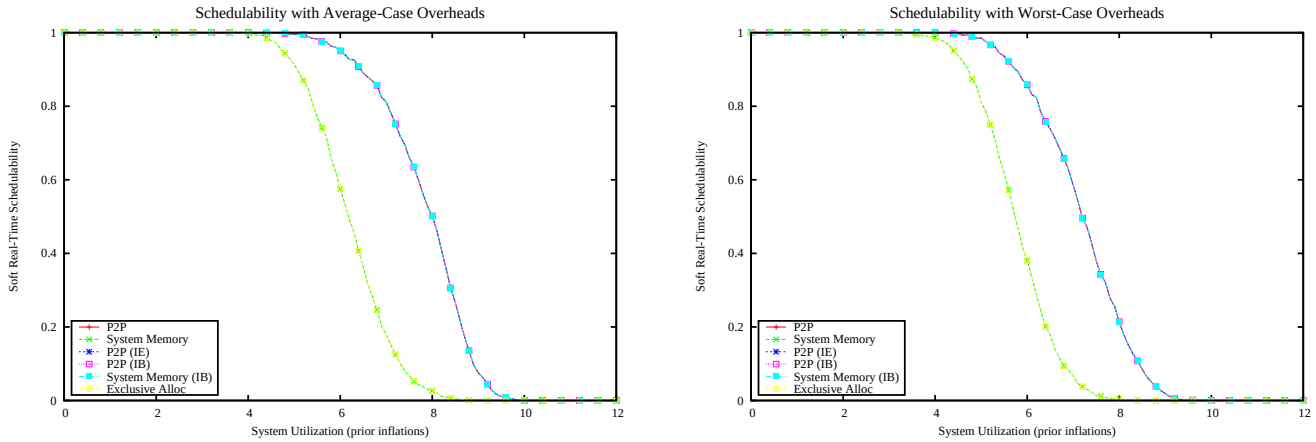

Figure 5150: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

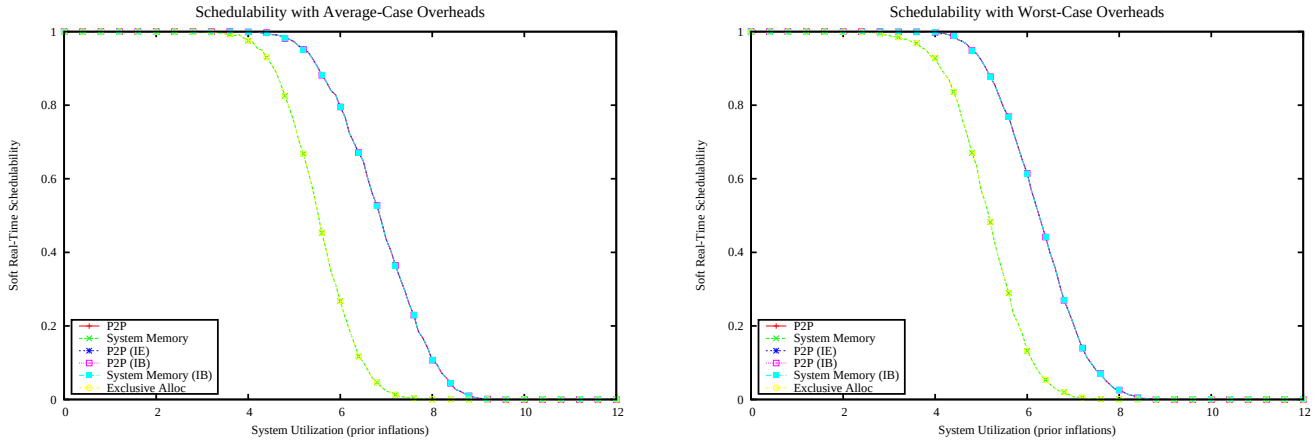

Figure 5151: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

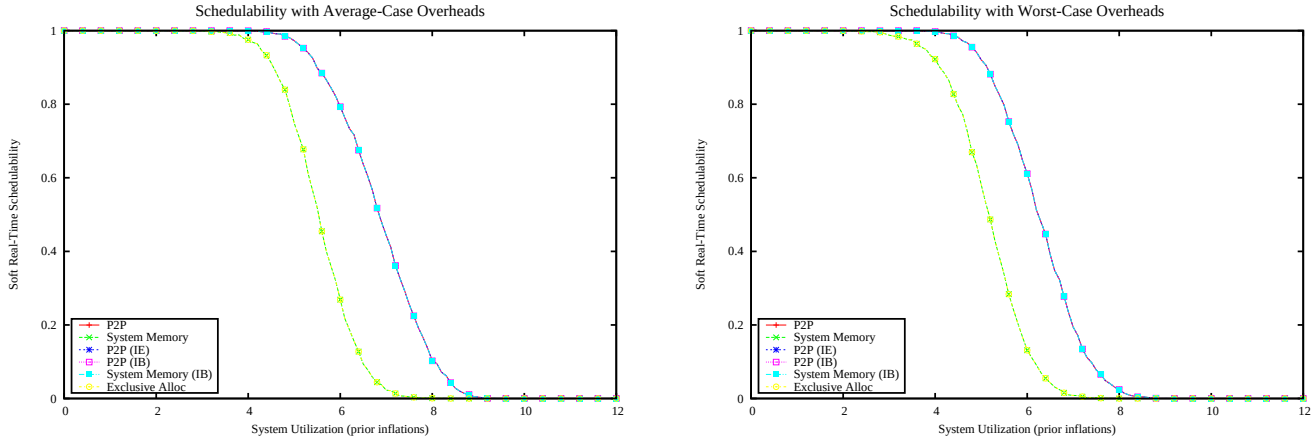

Figure 5152: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

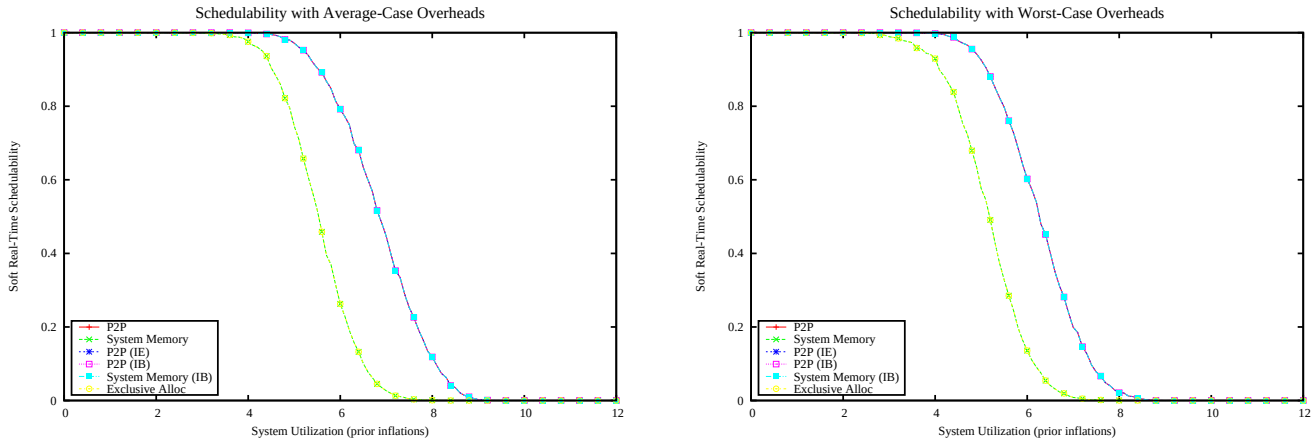

Figure 5153: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

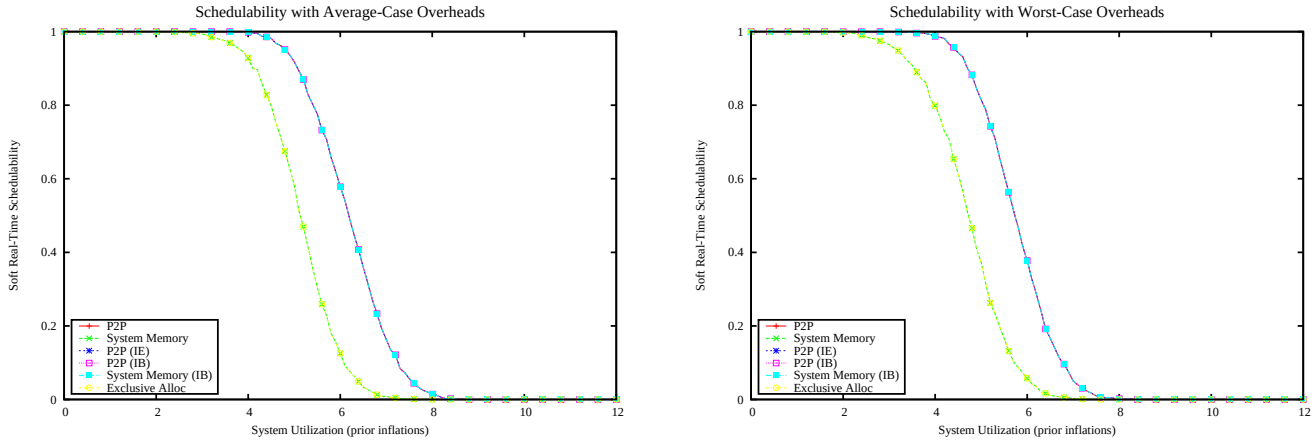

Figure 5154: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

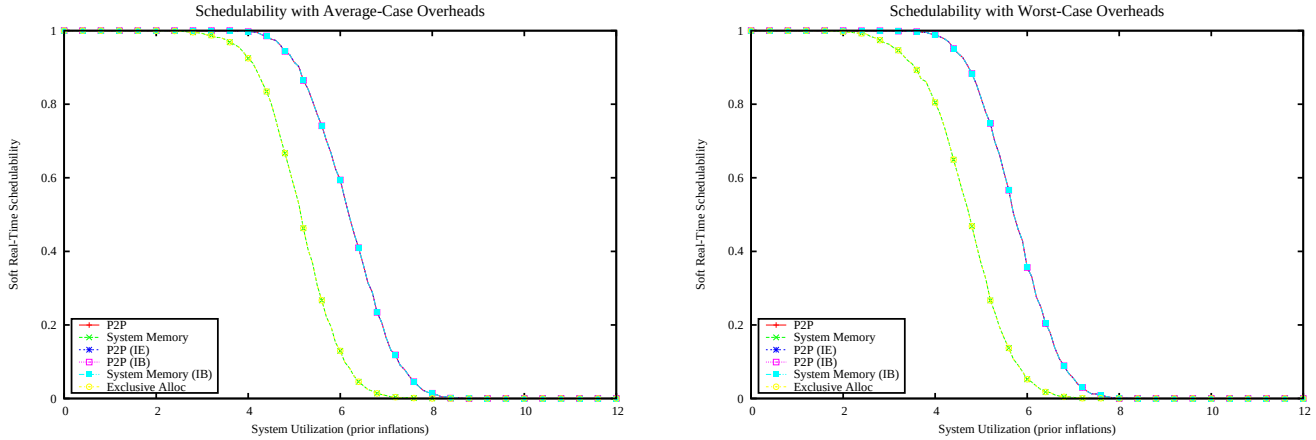

Figure 5155: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

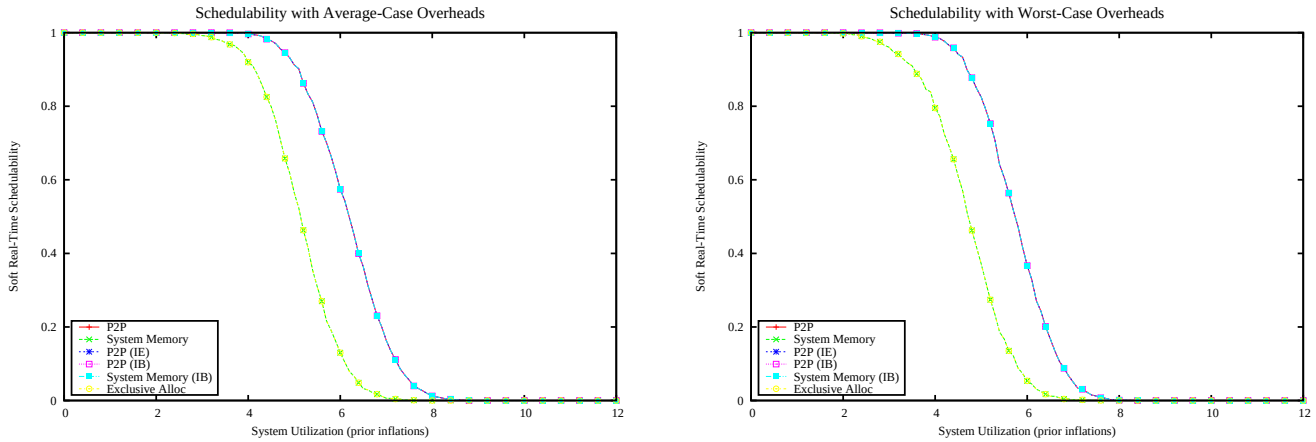

Figure 5156: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

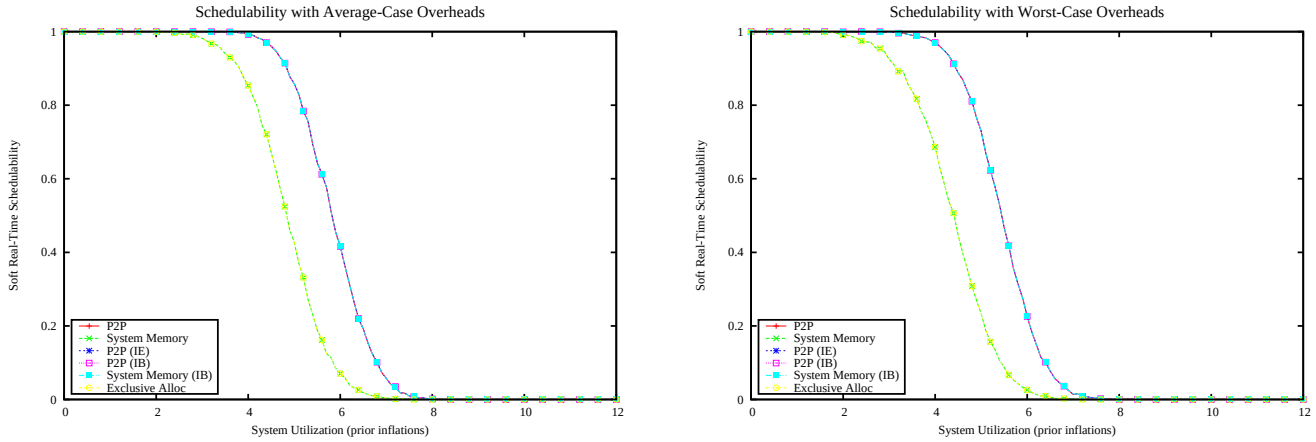

Figure 5157: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

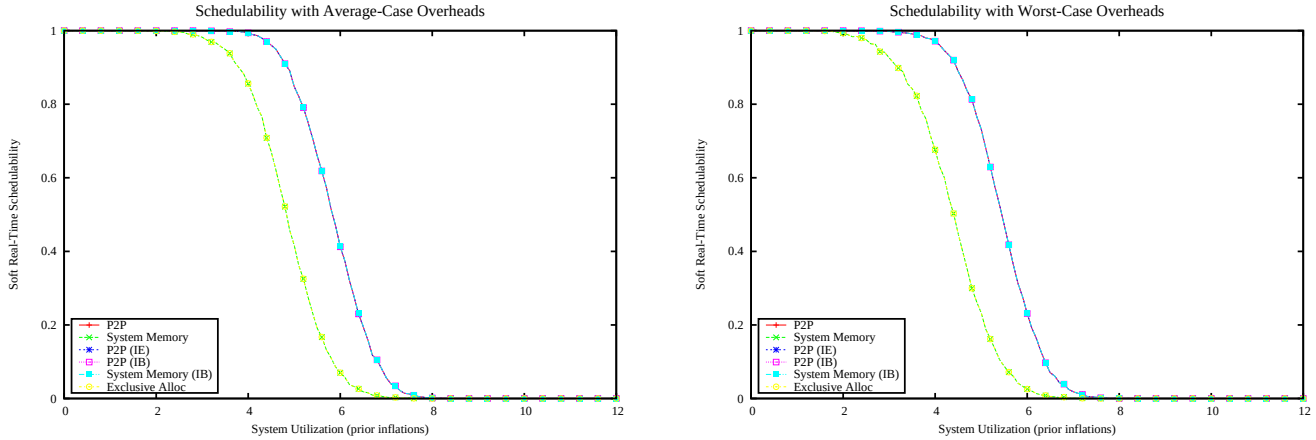

Figure 5158: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

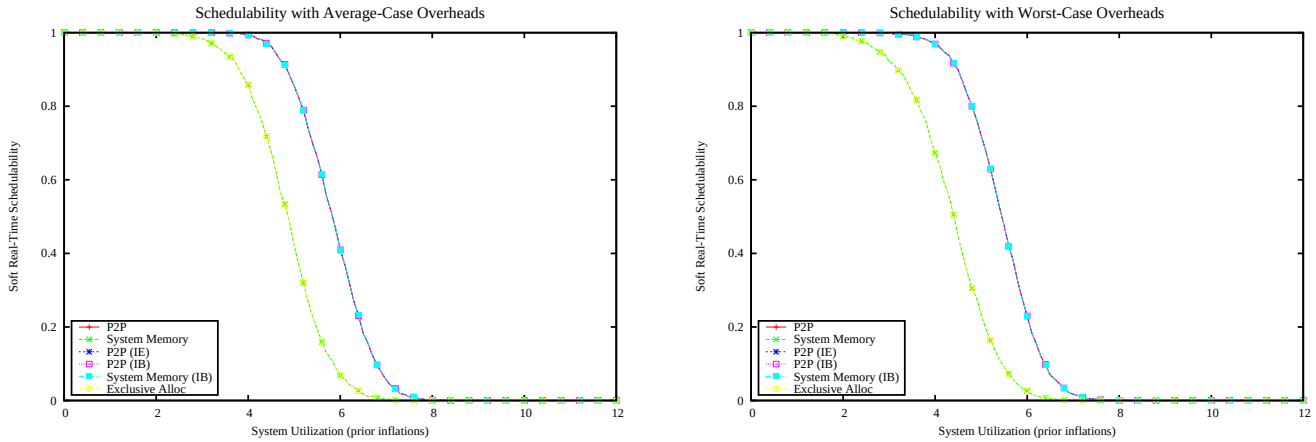

Figure 5159: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

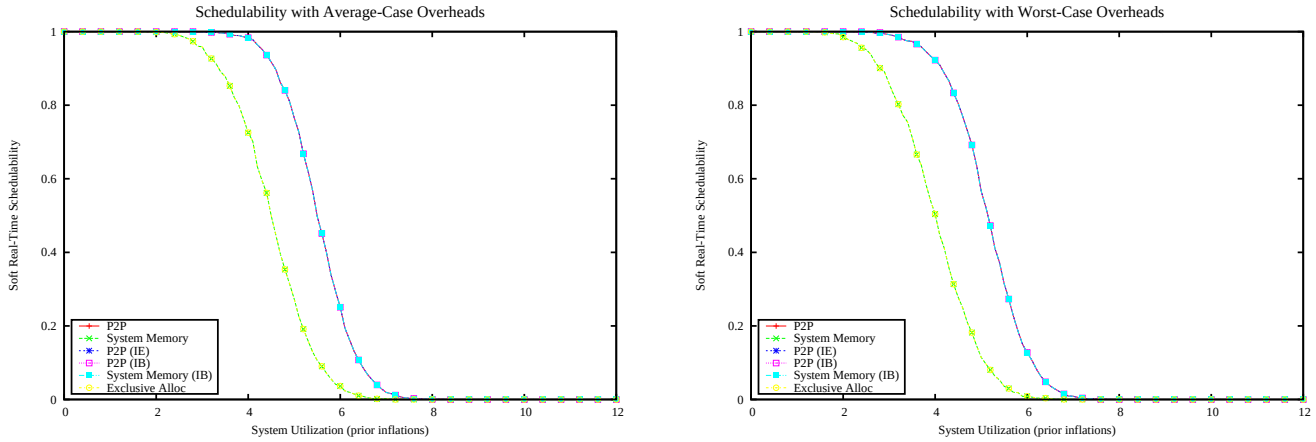

Figure 5160: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

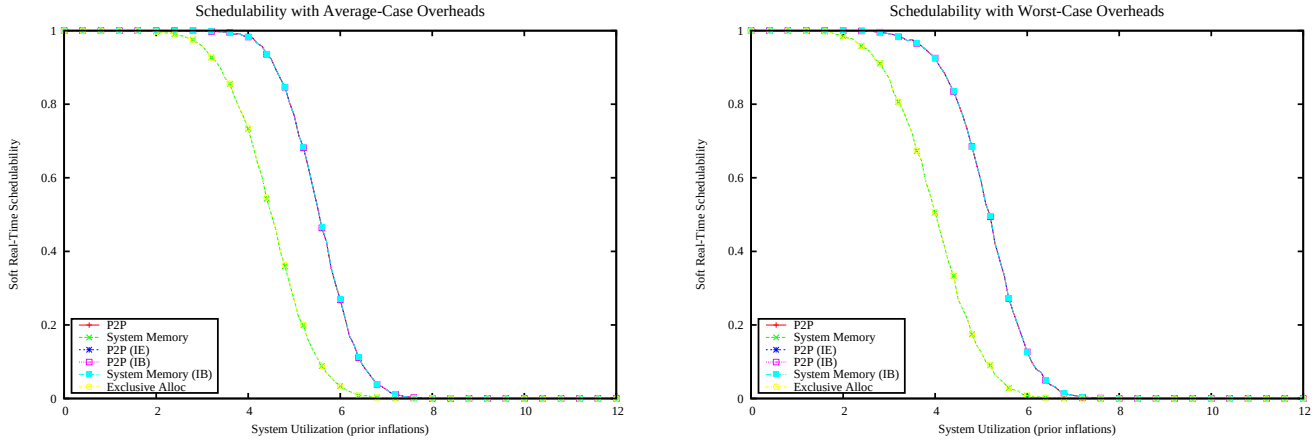

Figure 5161: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

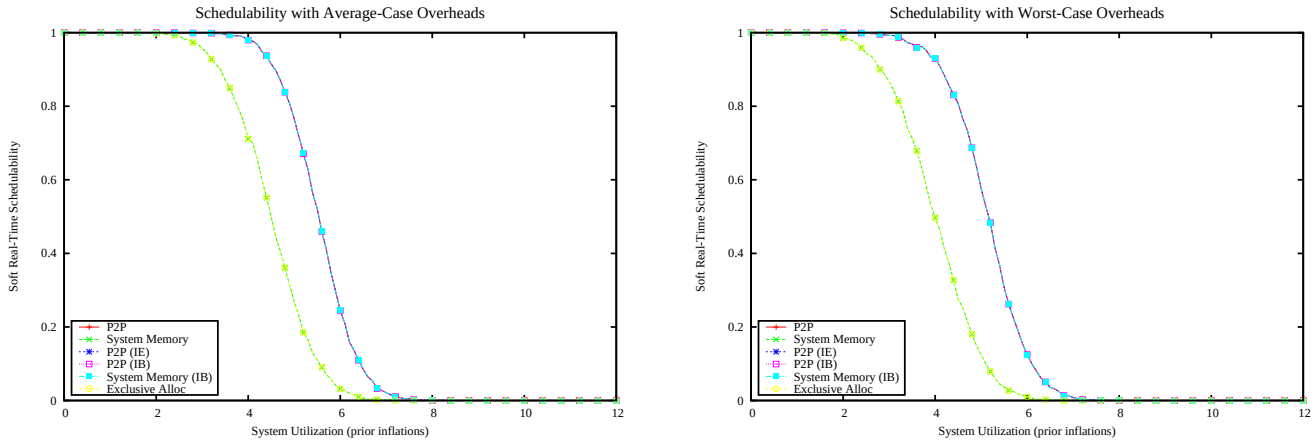

Figure 5162: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

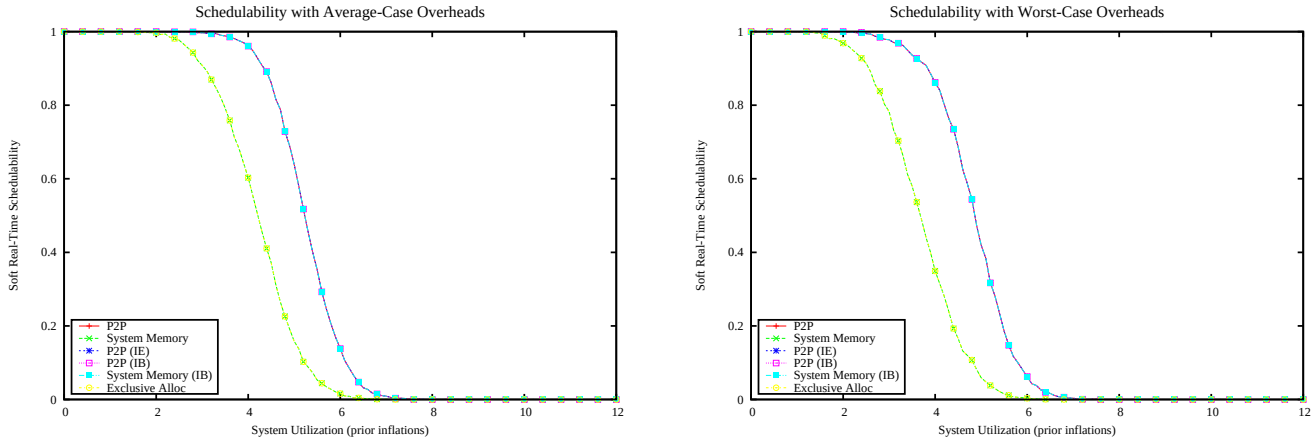

Figure 5163: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

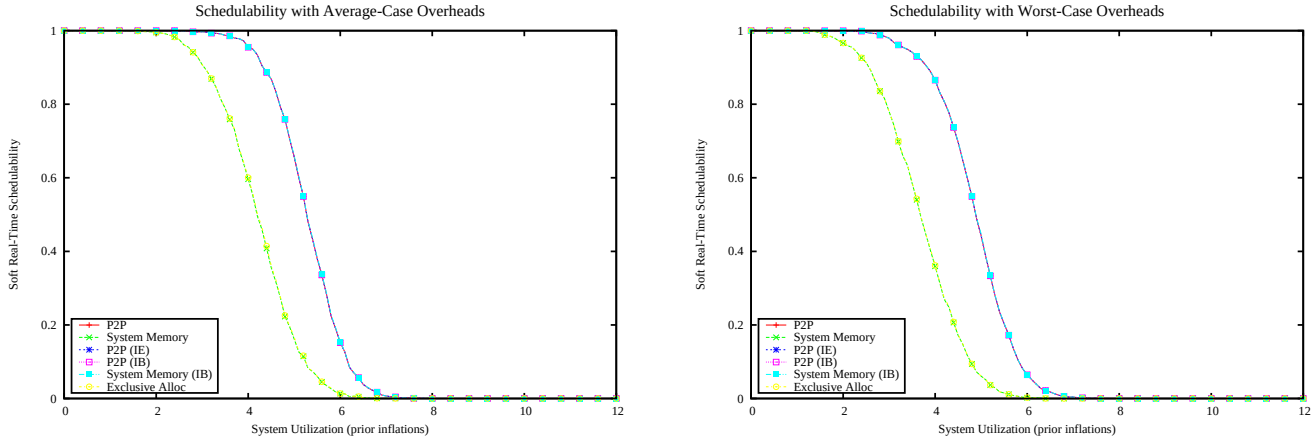

Figure 5164: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

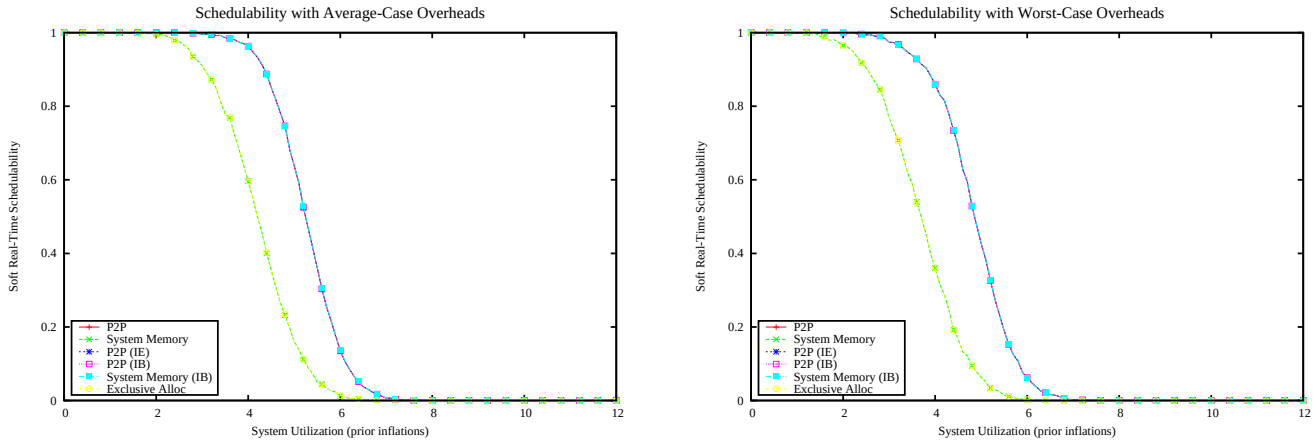

Figure 5165: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

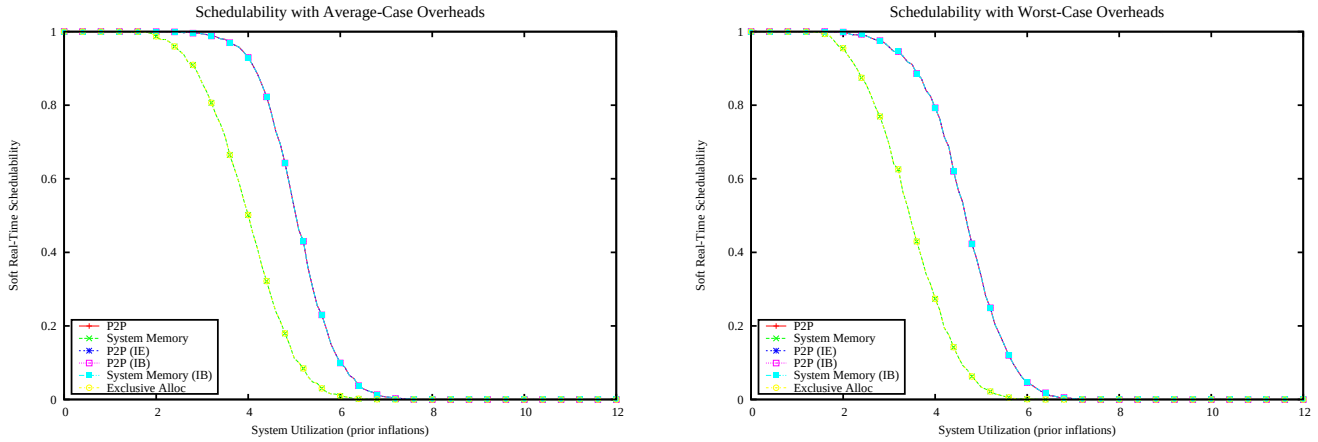

Figure 5166: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

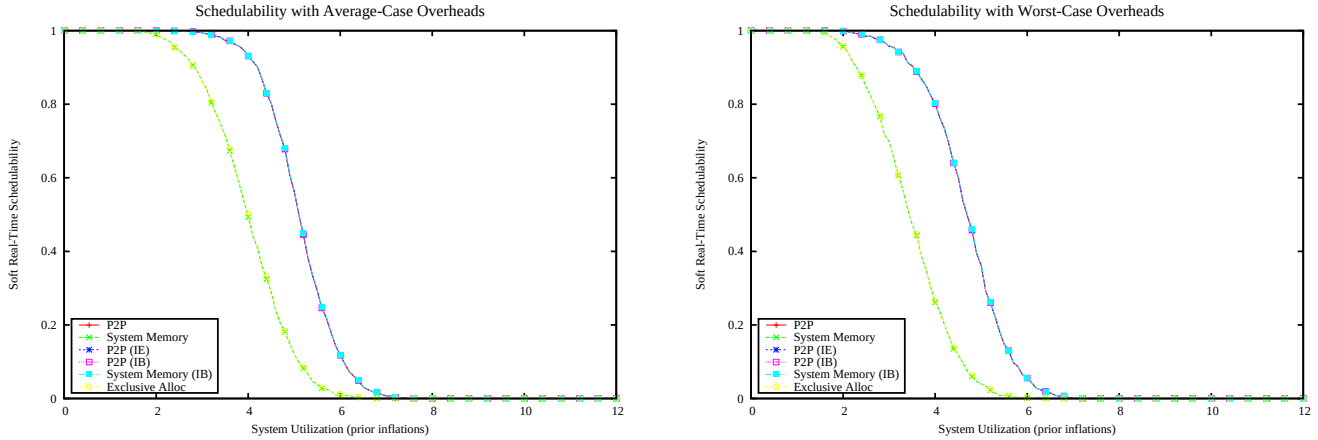

Figure 5167: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

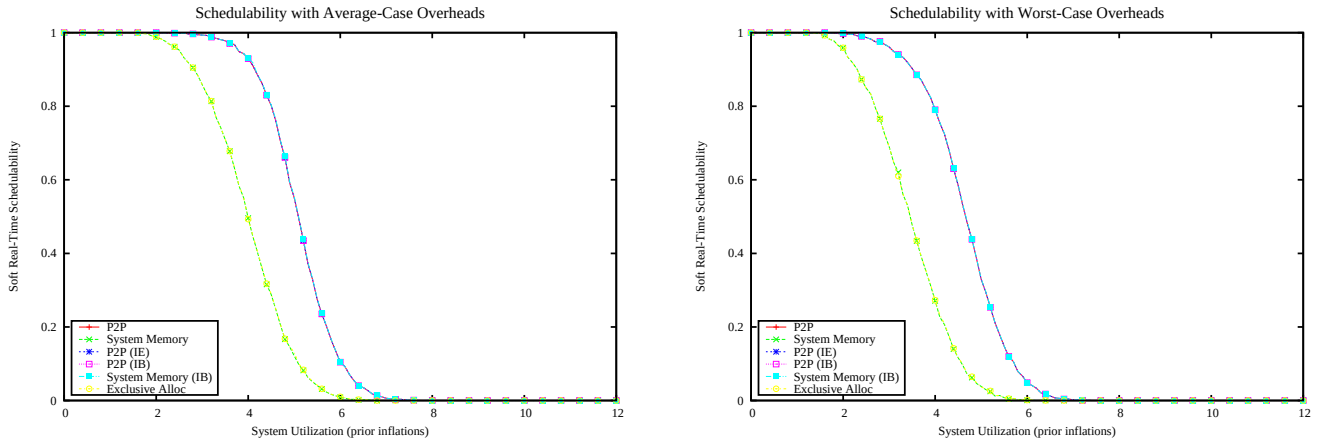

Figure 5168: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

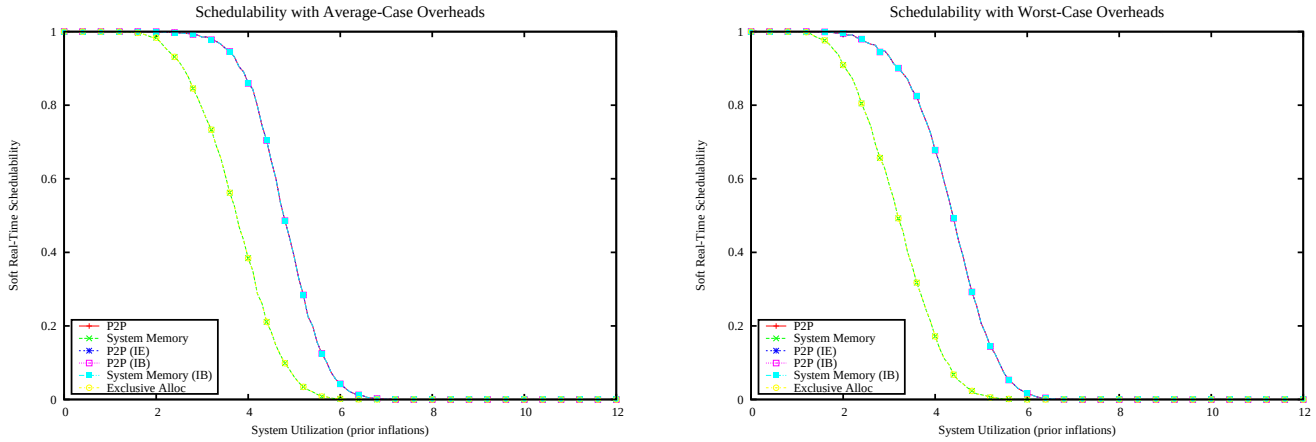

Figure 5169: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

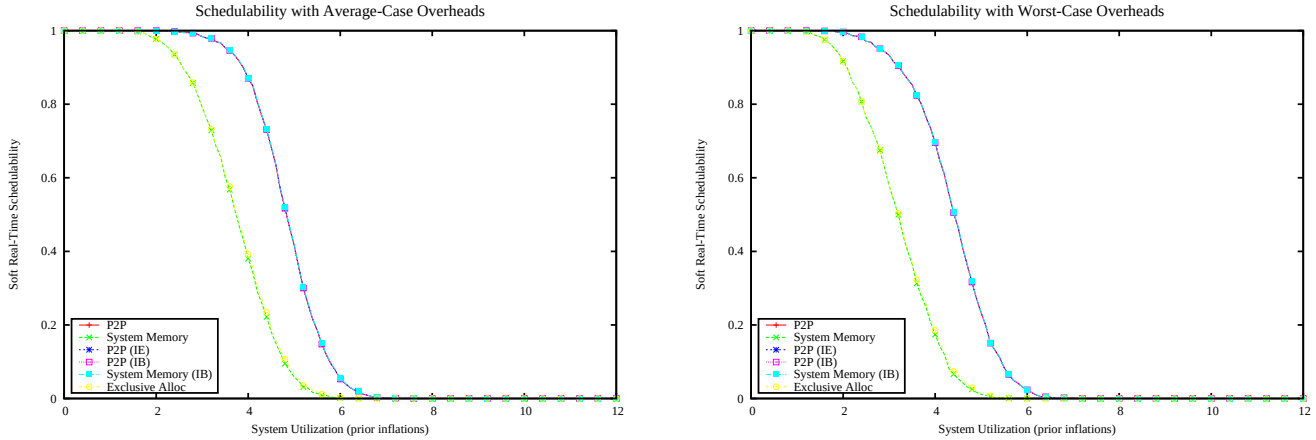

Figure 5170: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

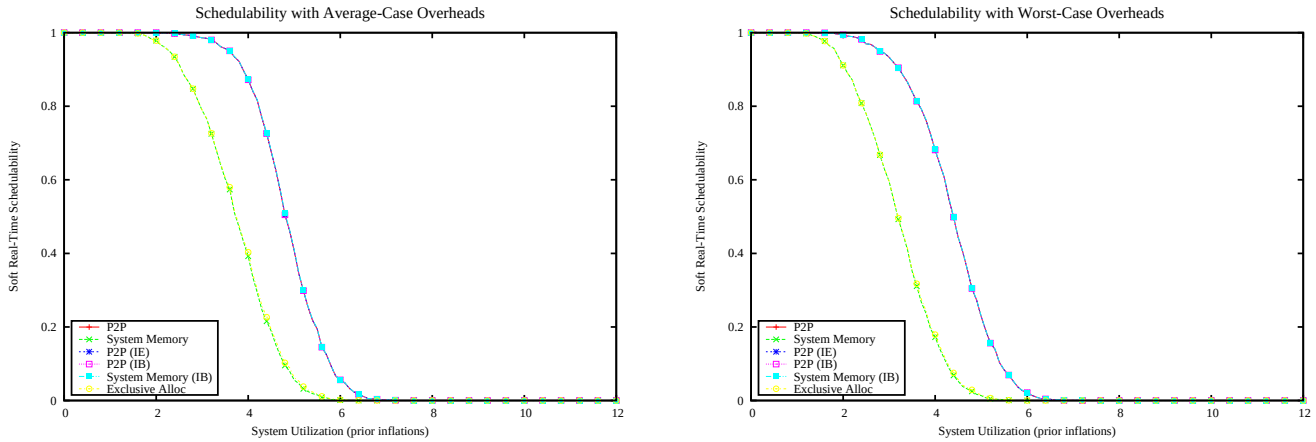

Figure 5171: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

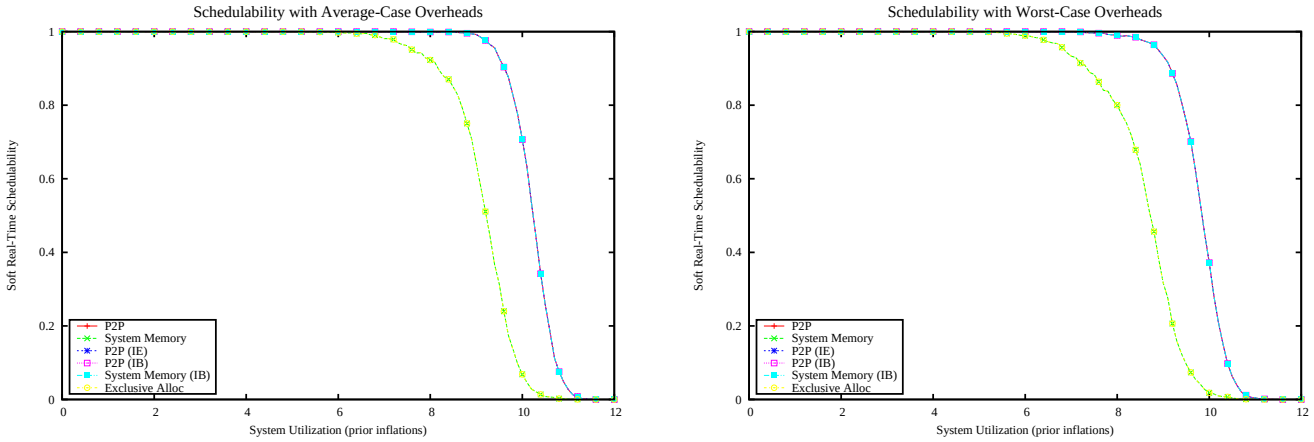

Figure 5172: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

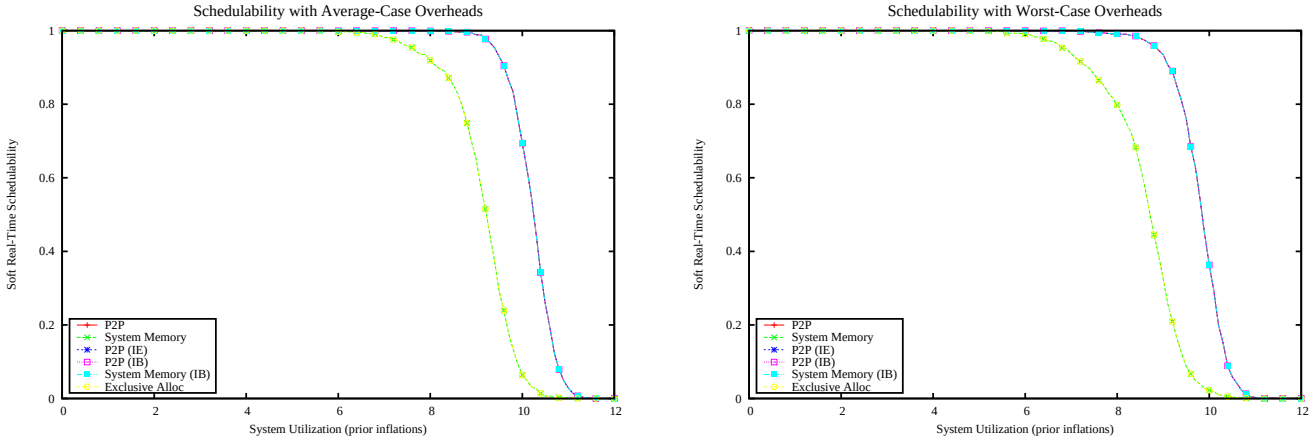

Figure 5173: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

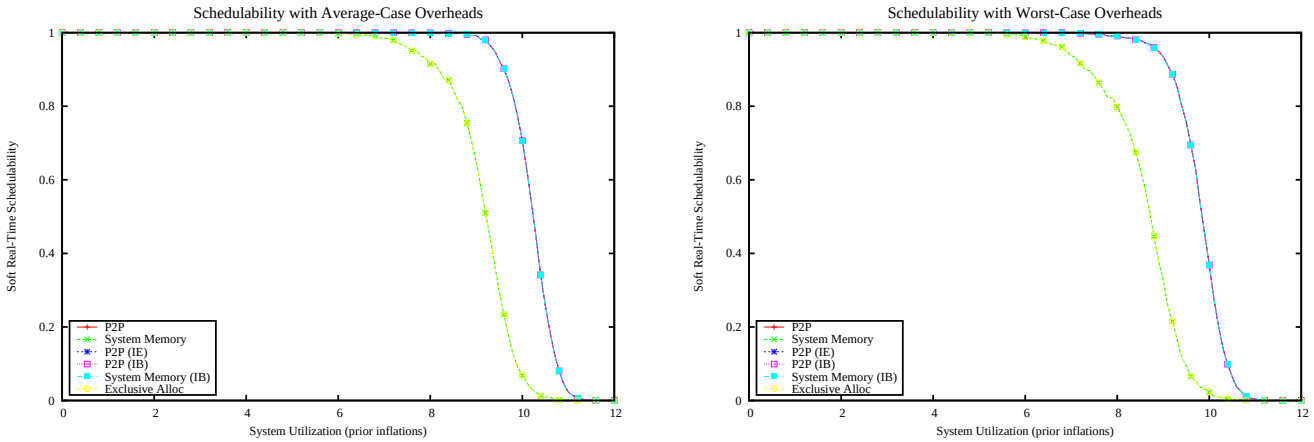

Figure 5174: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

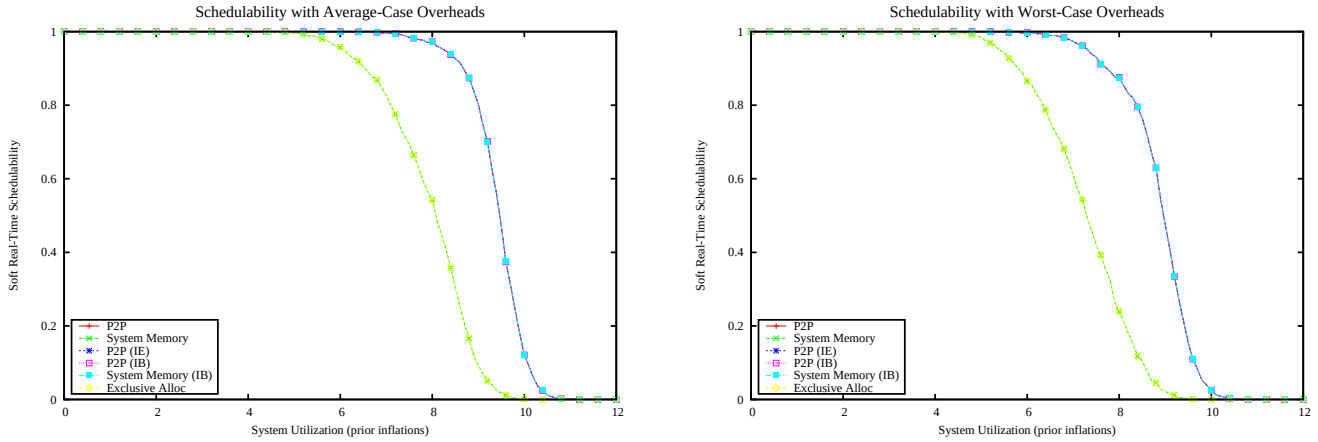

Figure 5175: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

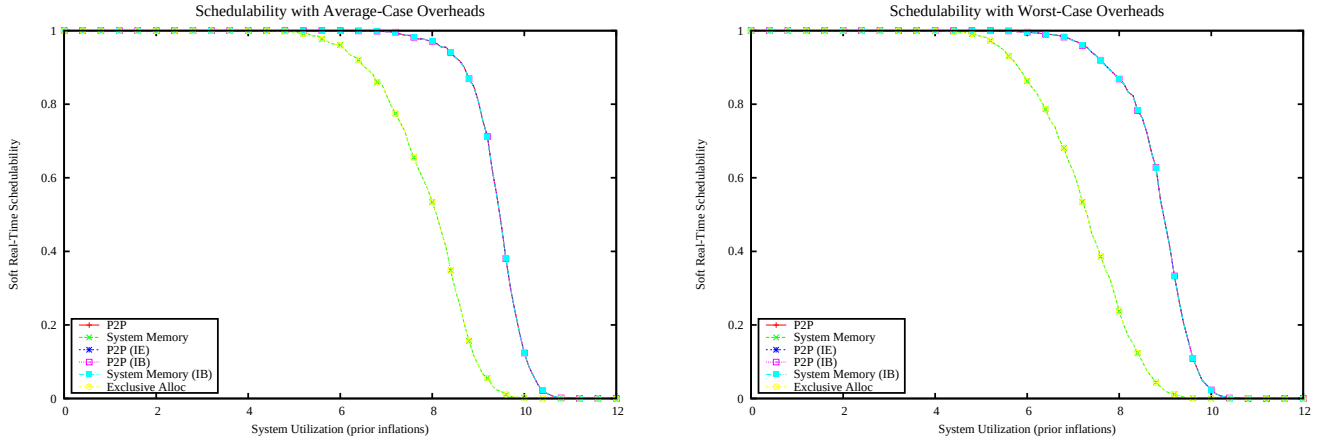

Figure 5176: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

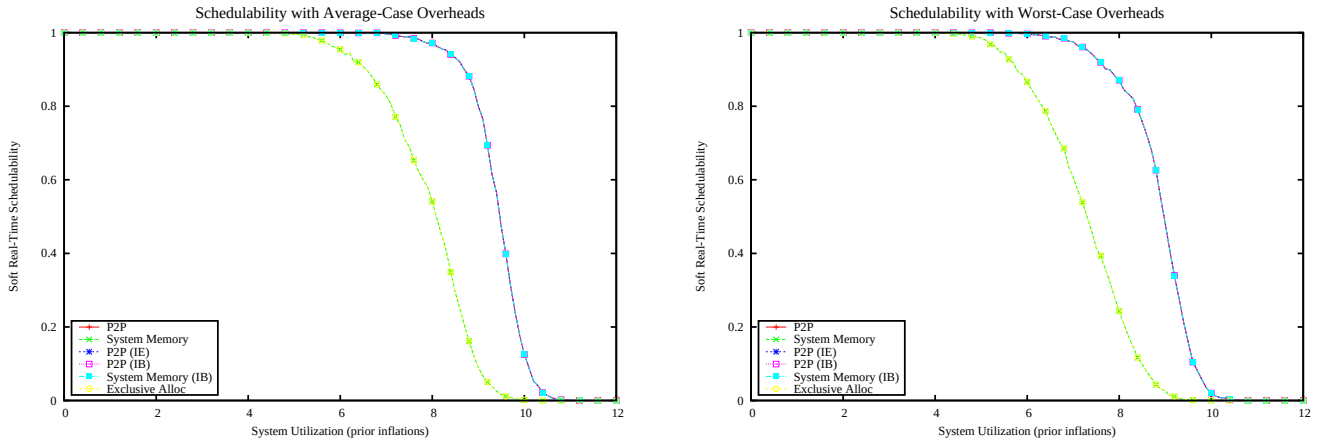

Figure 5177: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

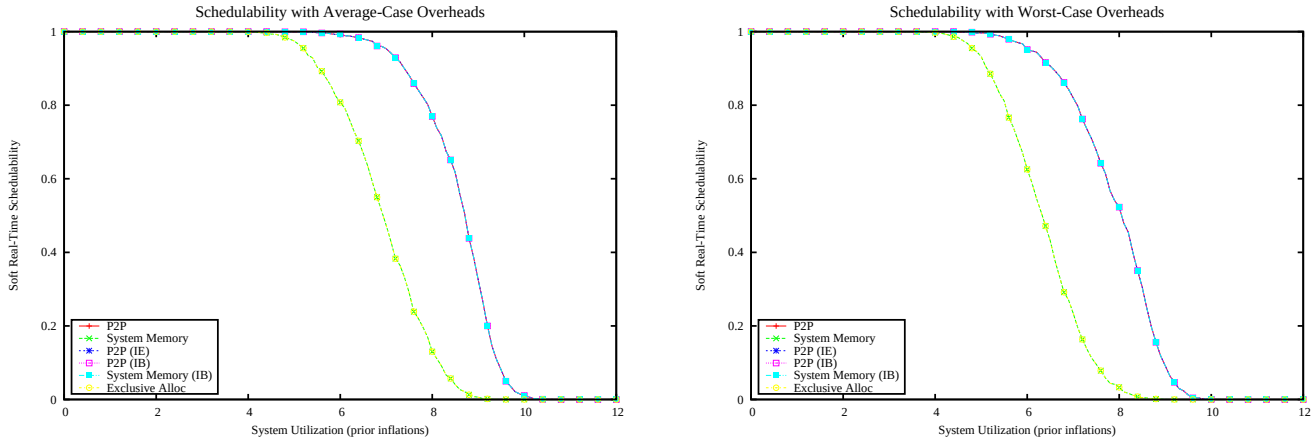

Figure 5178: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

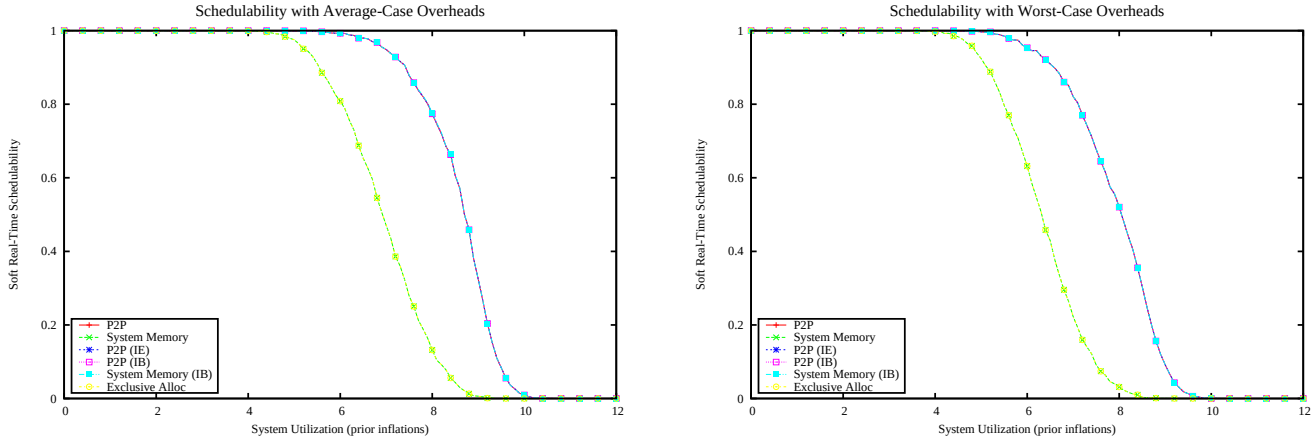

Figure 5179: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

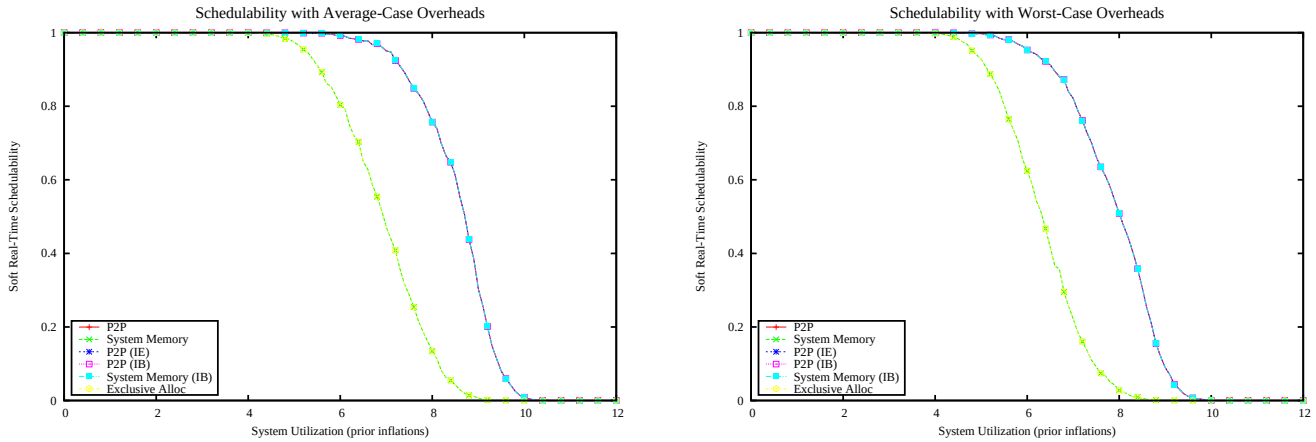

Figure 5180: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

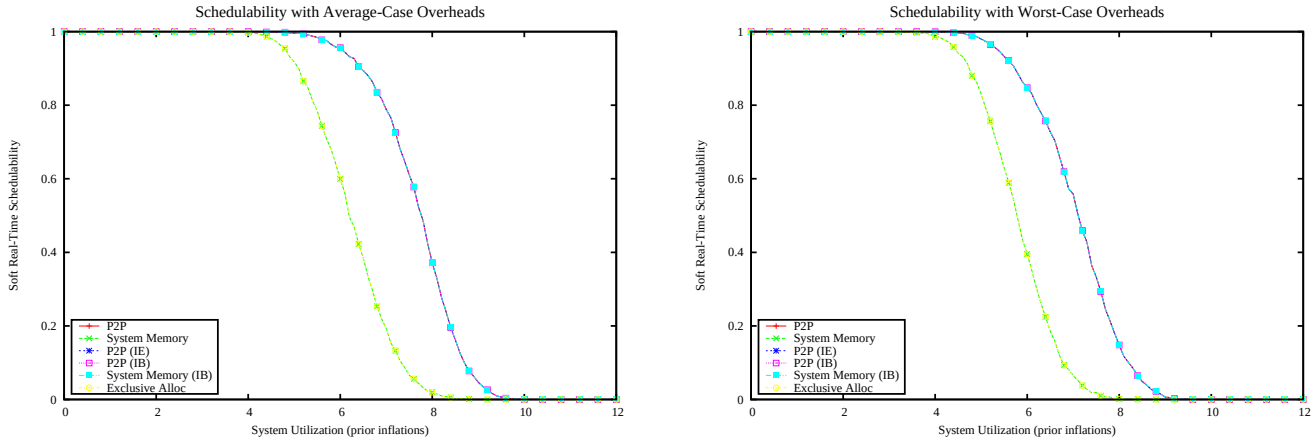

Figure 5181: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

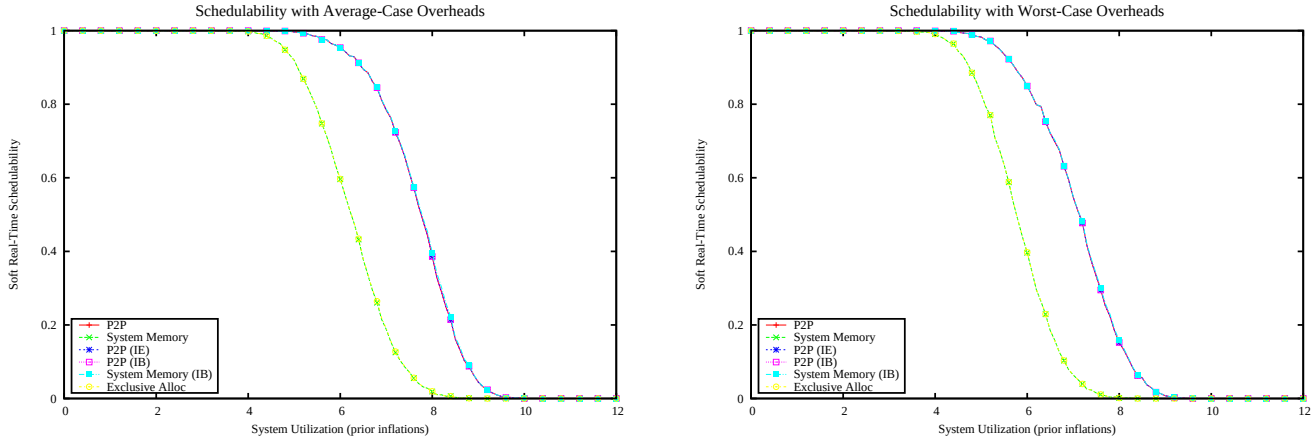

Figure 5182: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

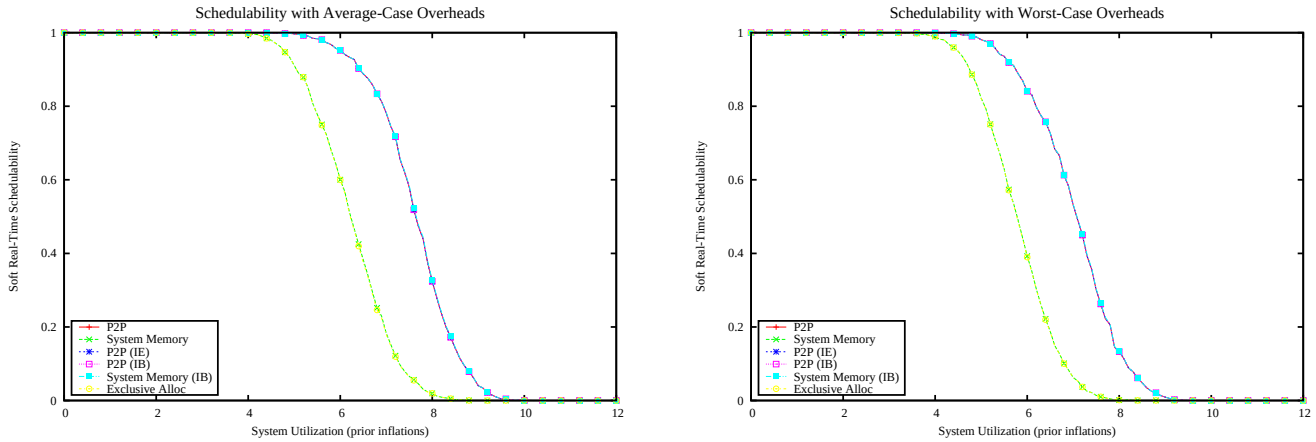

Figure 5183: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

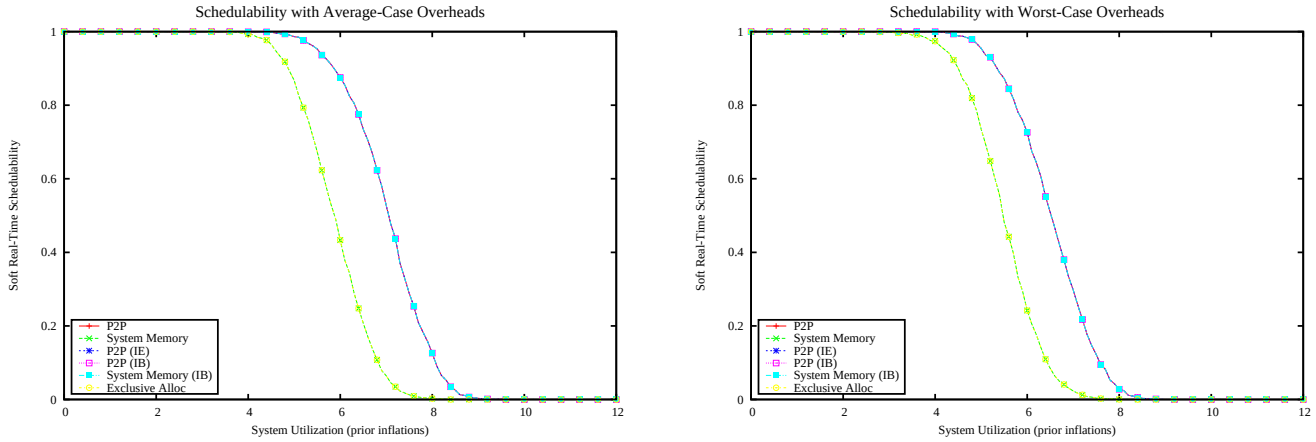

Figure 5184: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

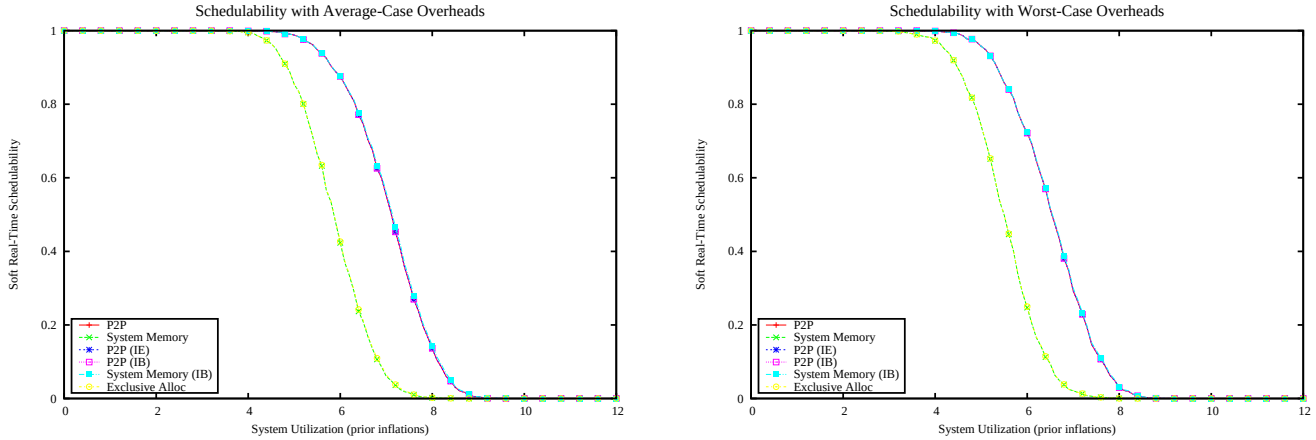

Figure 5185: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

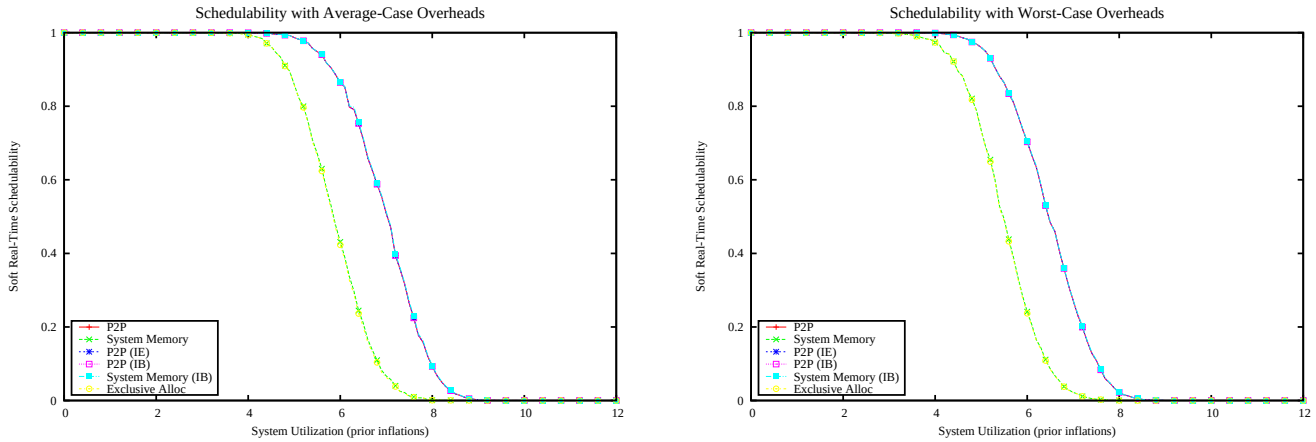

Figure 5186: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

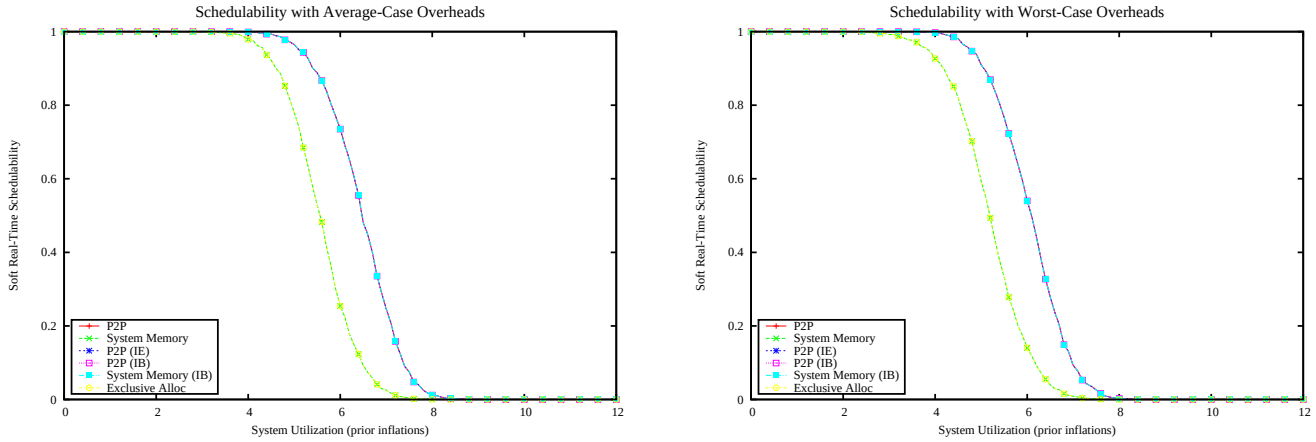

Figure 5187: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

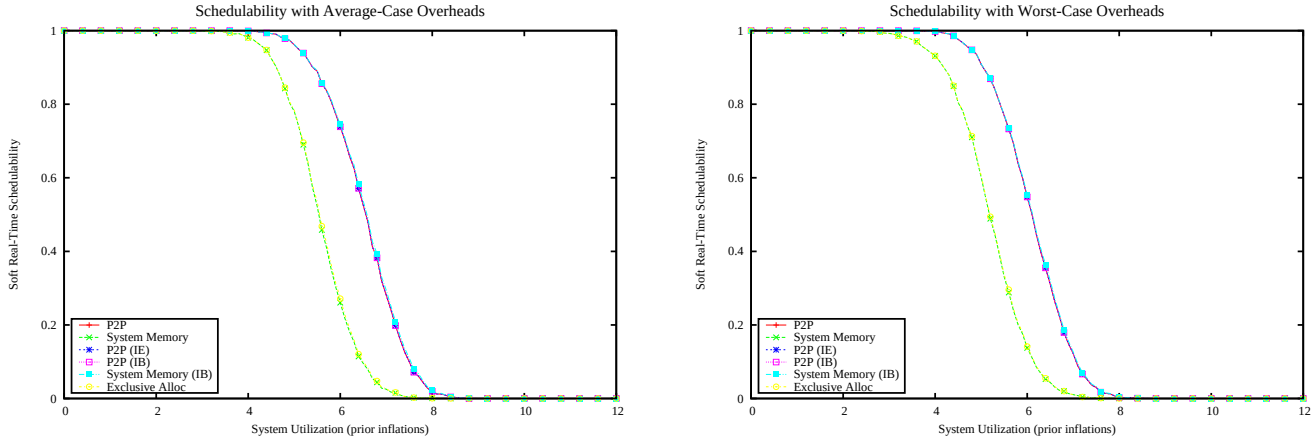

Figure 5188: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

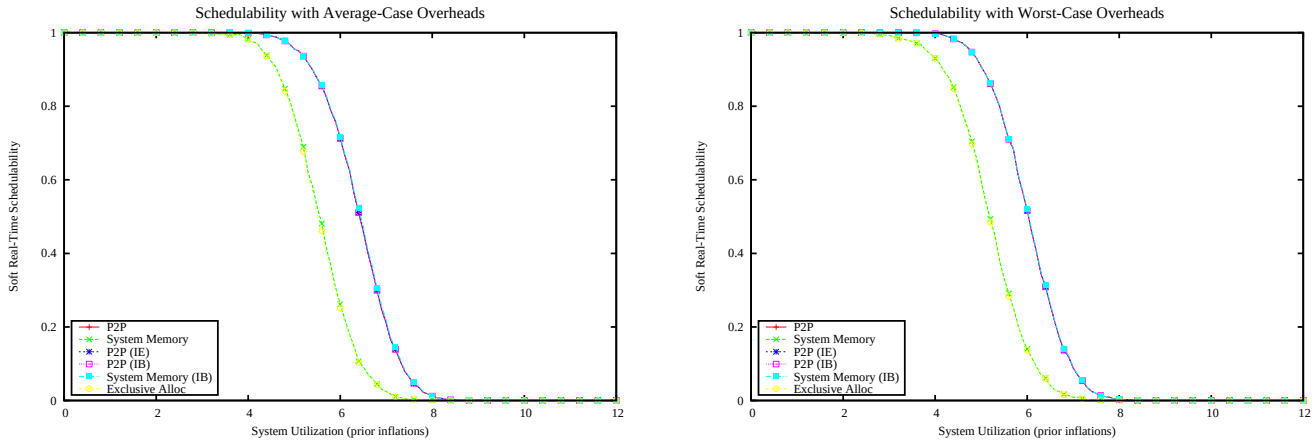

Figure 5189: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

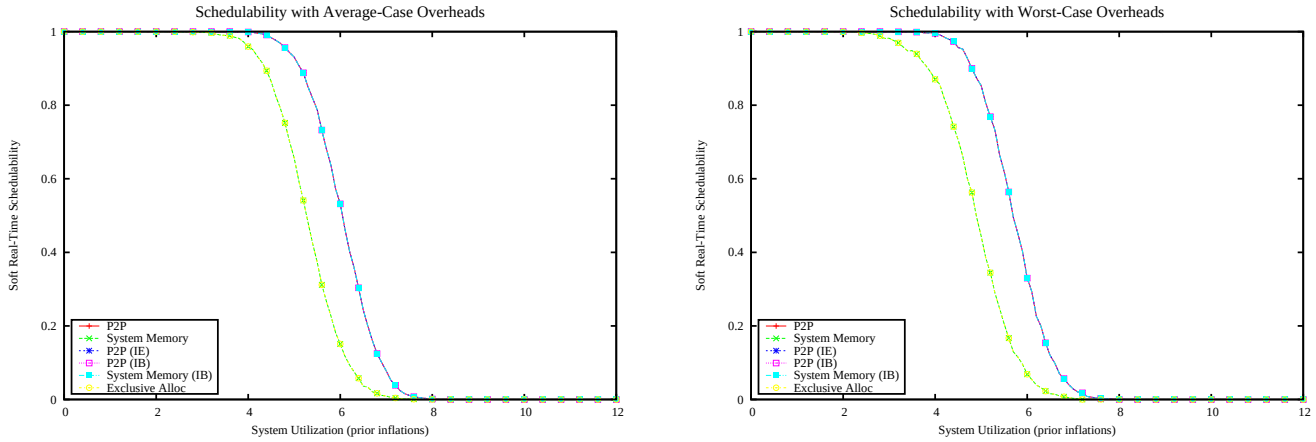

Figure 5190: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

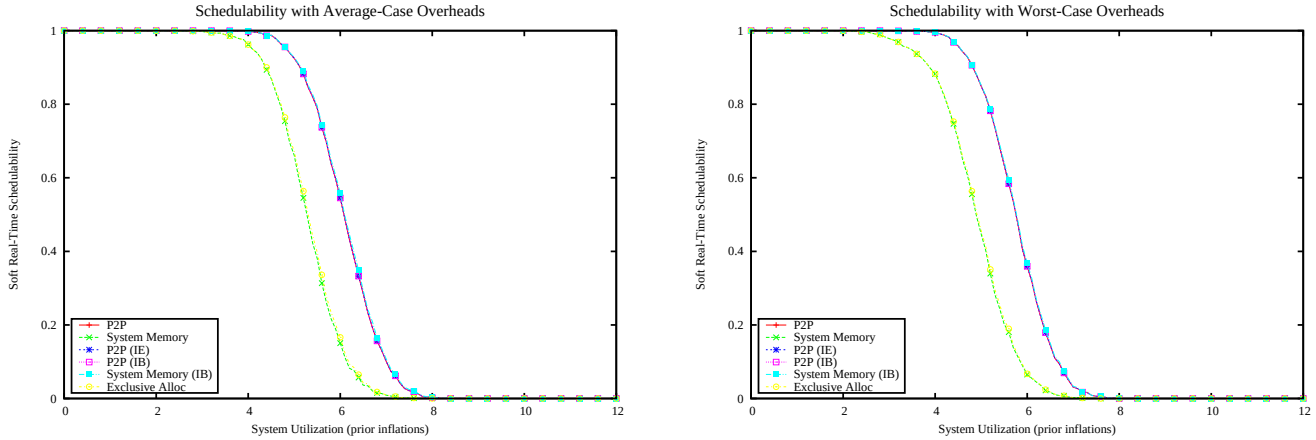

Figure 5191: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

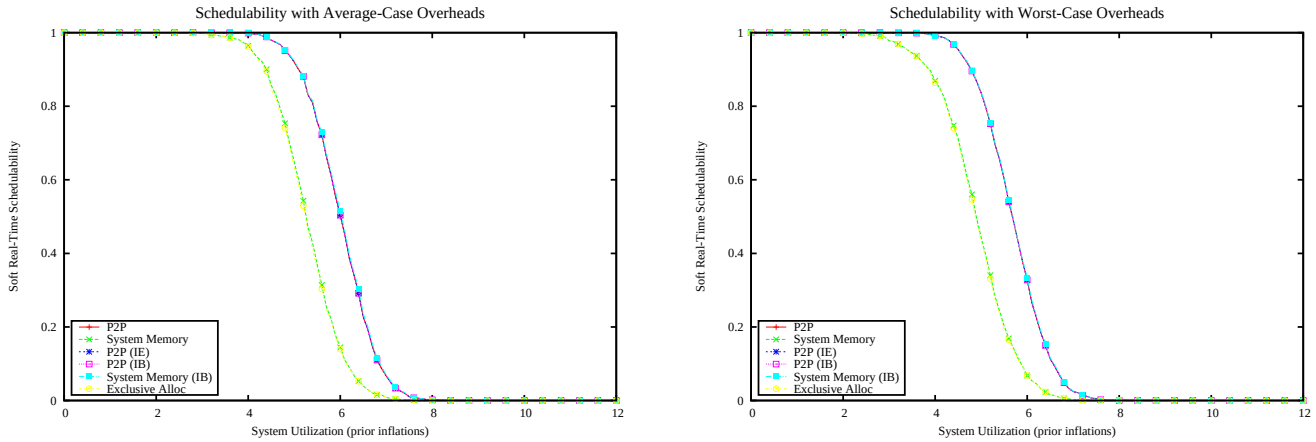

Figure 5192: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

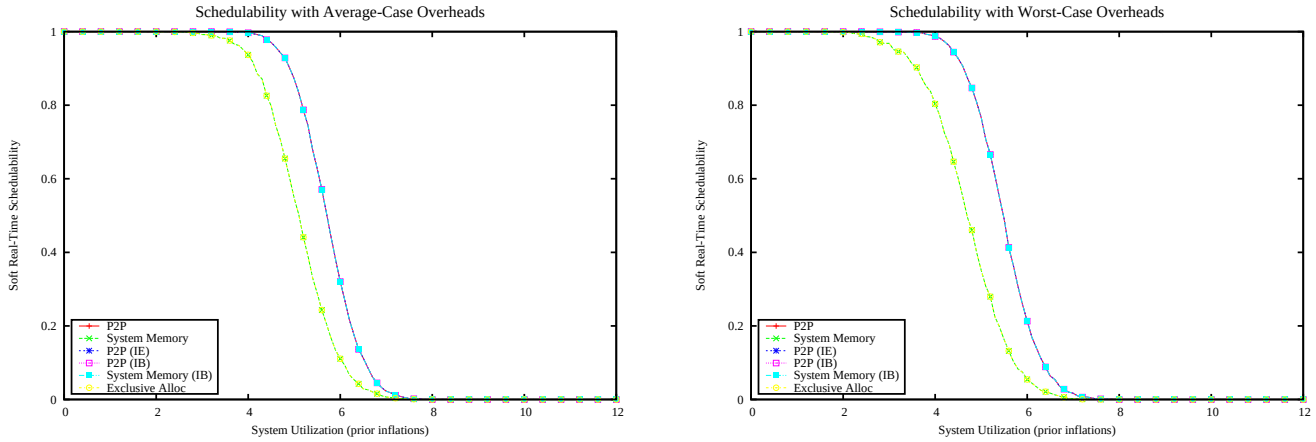

Figure 5193: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

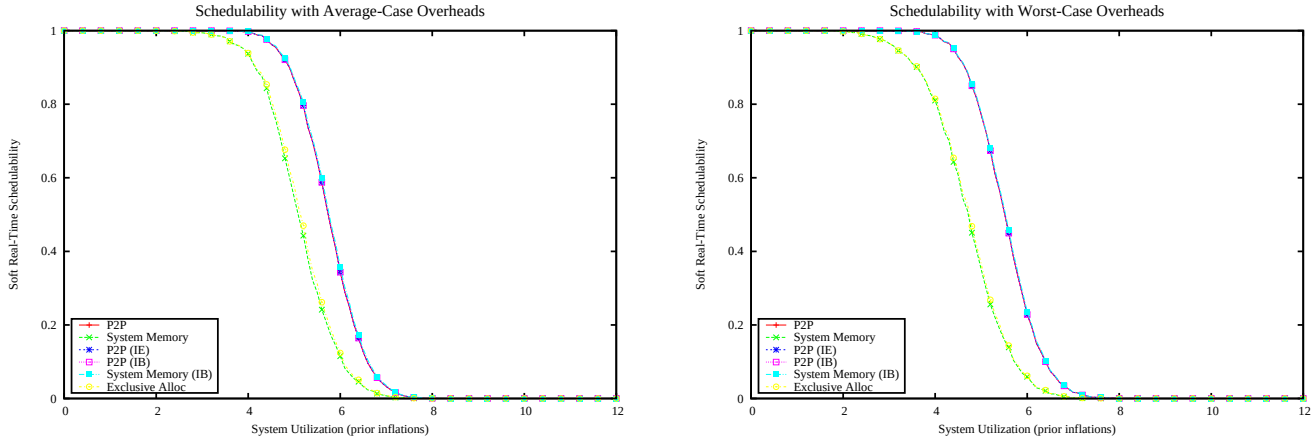

Figure 5194: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

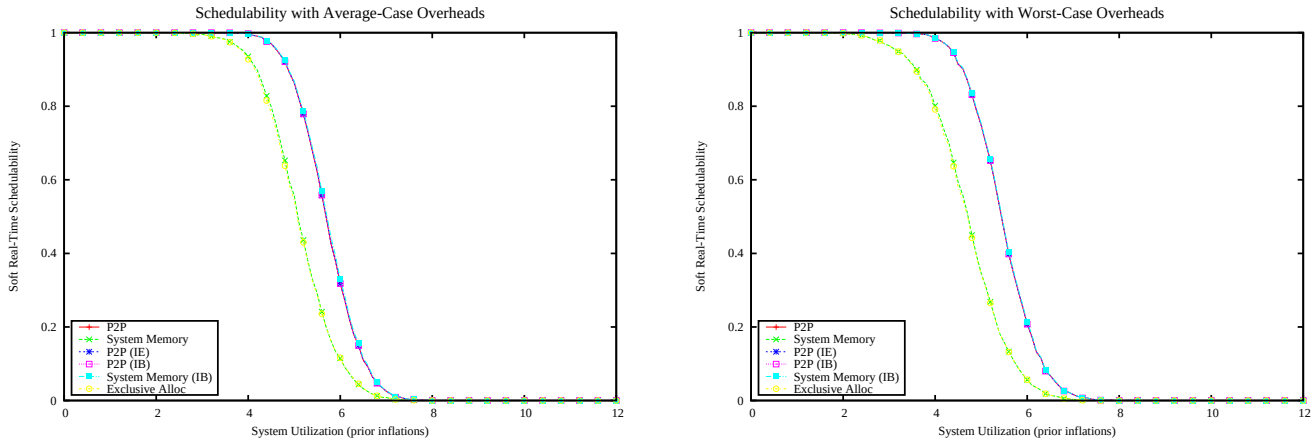

Figure 5195: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

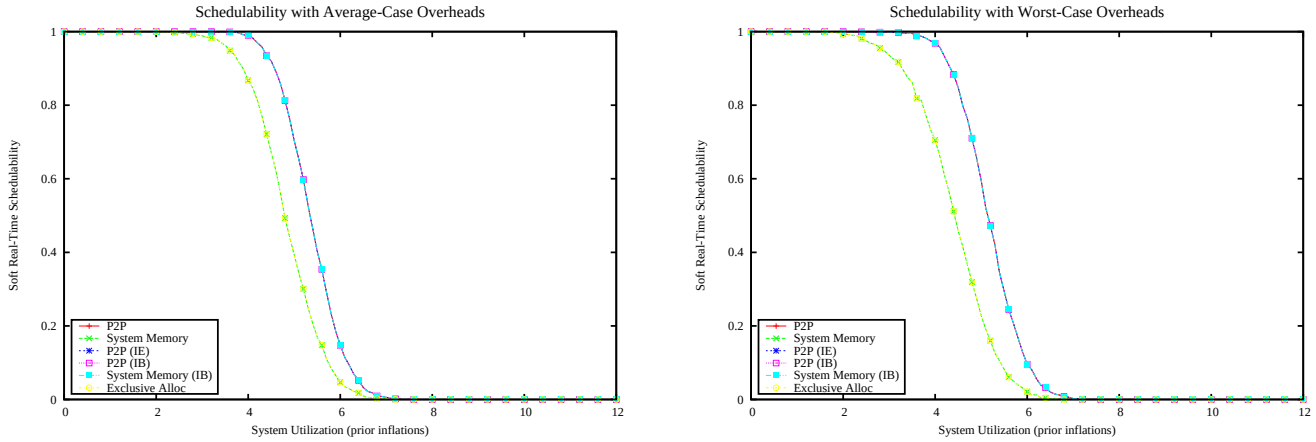

Figure 5196: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

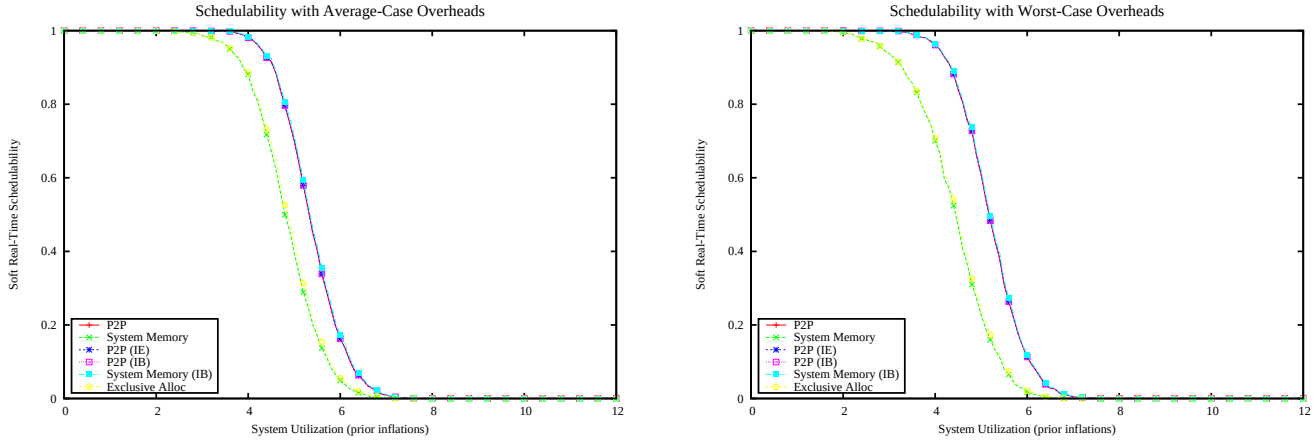

Figure 5197: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

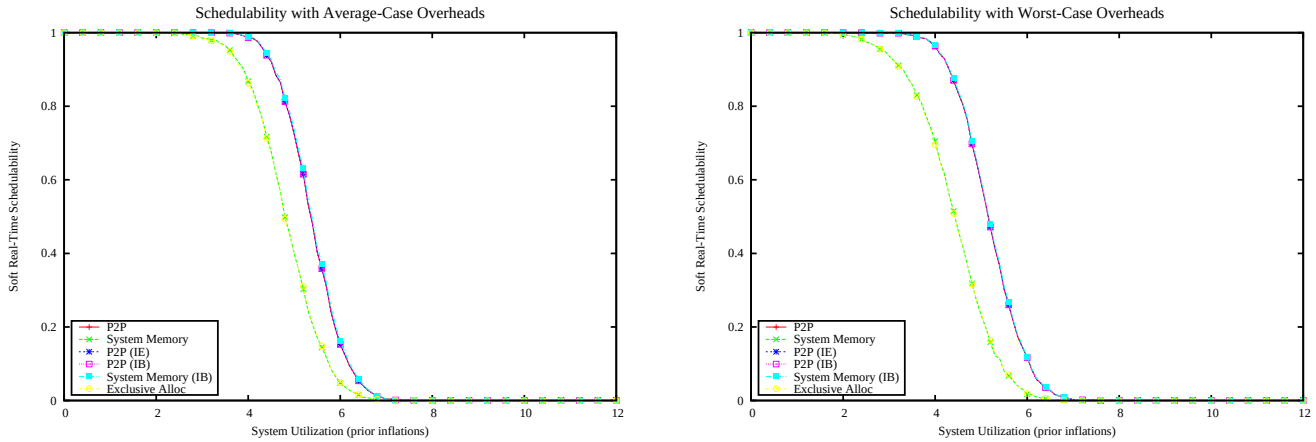

Figure 5198: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

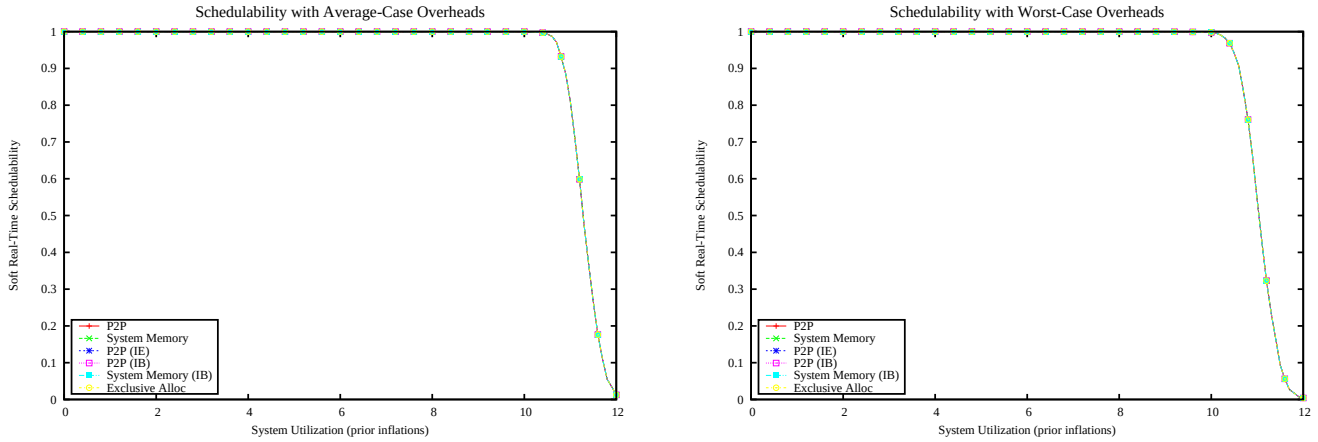

Figure 5199: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

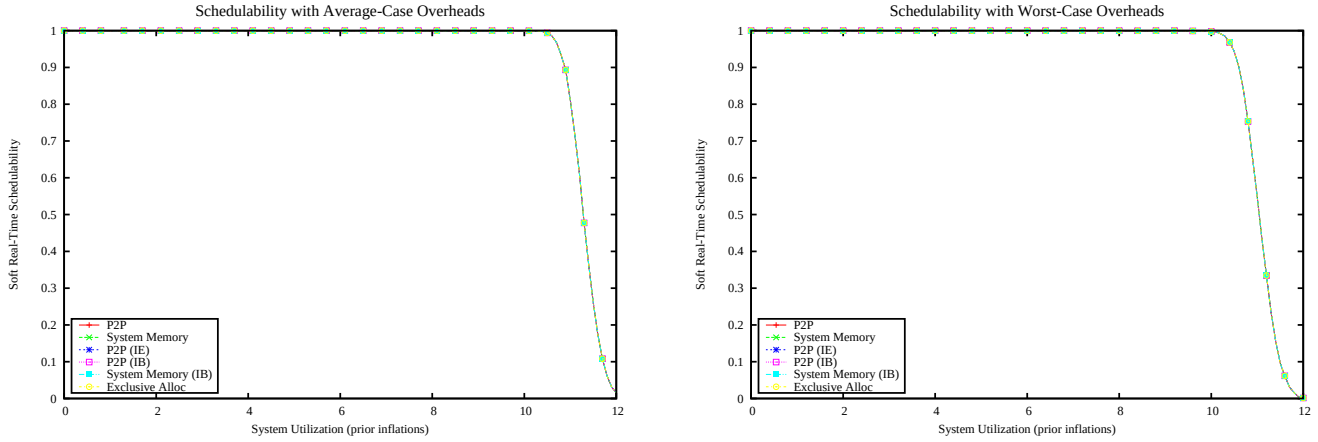

Figure 5200: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

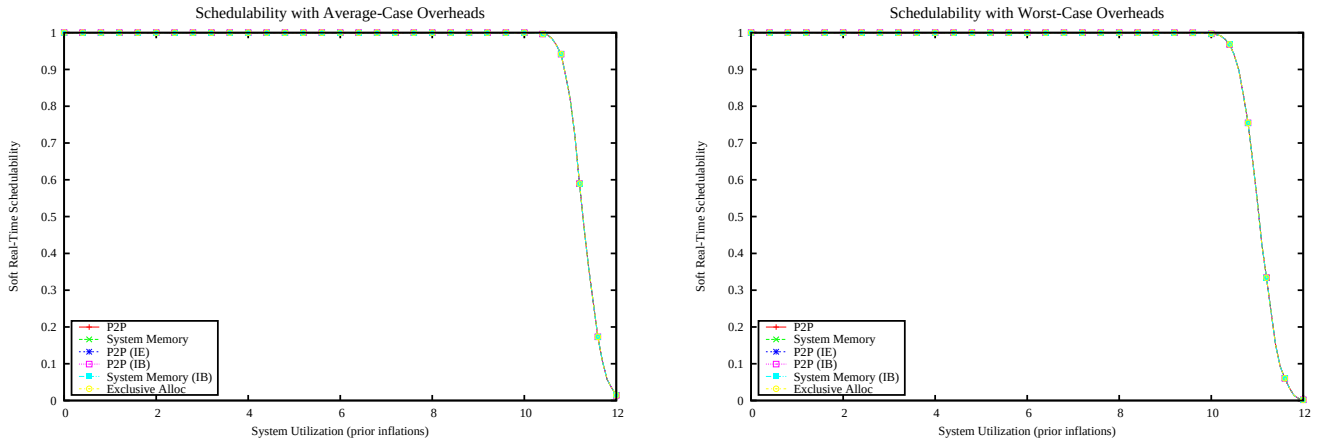

Figure 5201: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

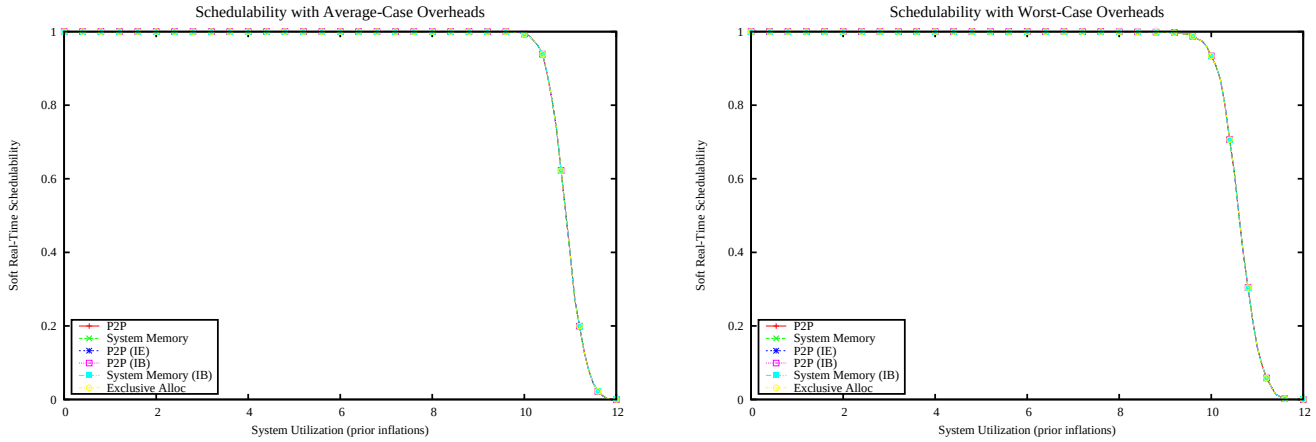

Figure 5202: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

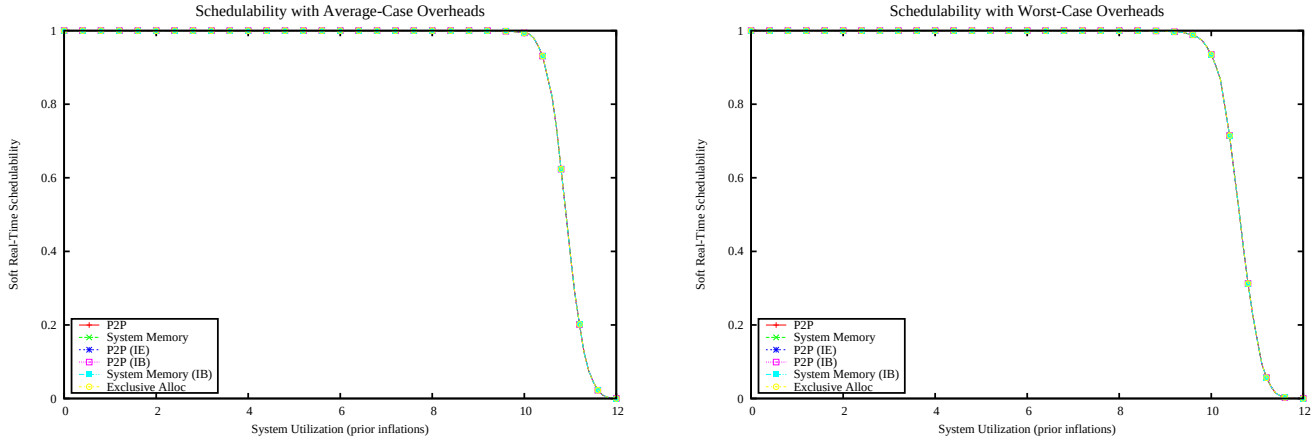

Figure 5203: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

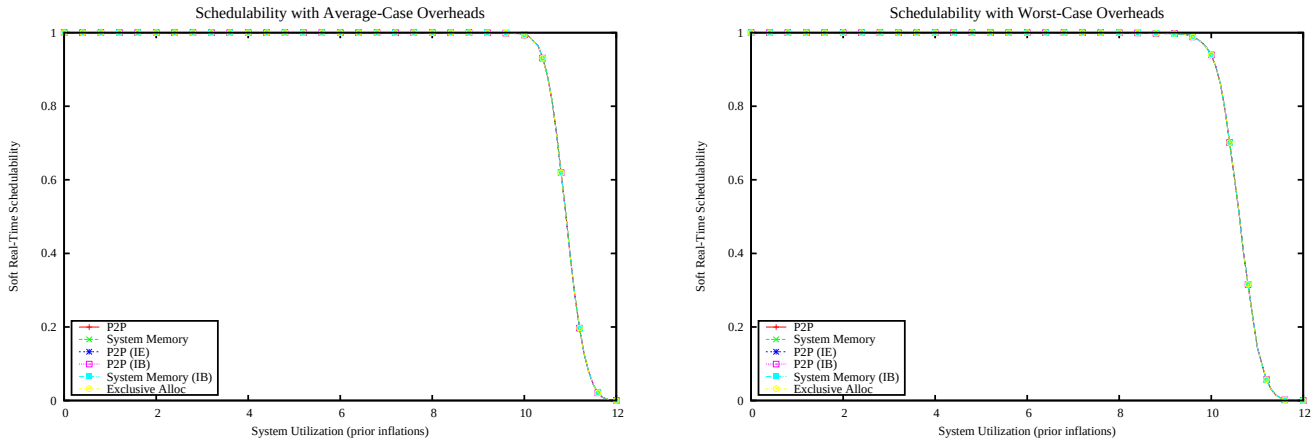

Figure 5204: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

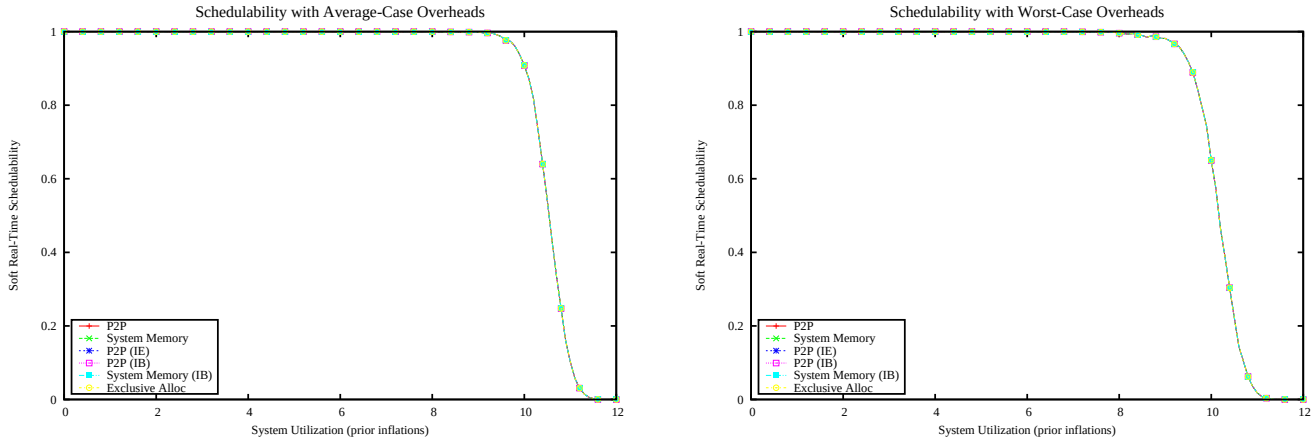

Figure 5205: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

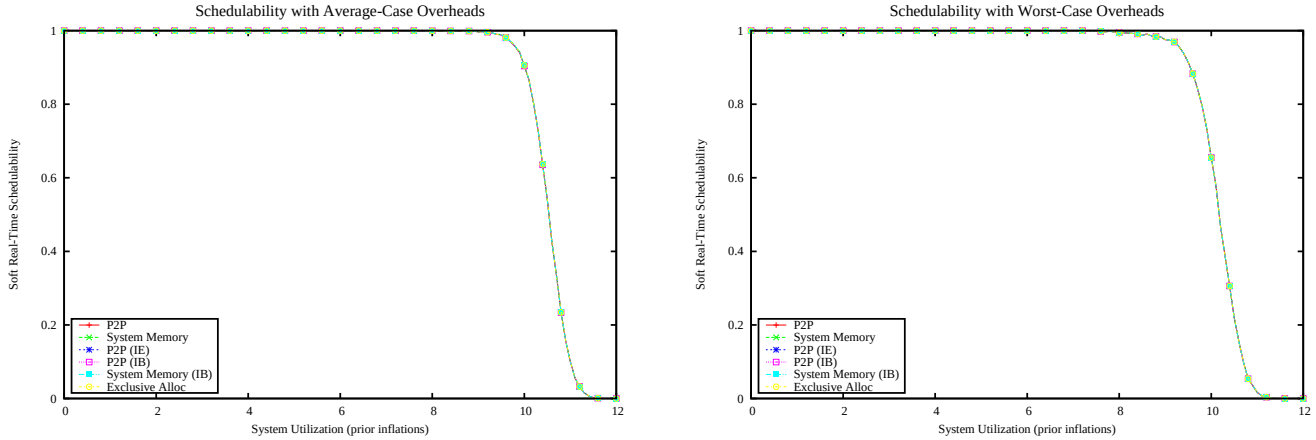

Figure 5206: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

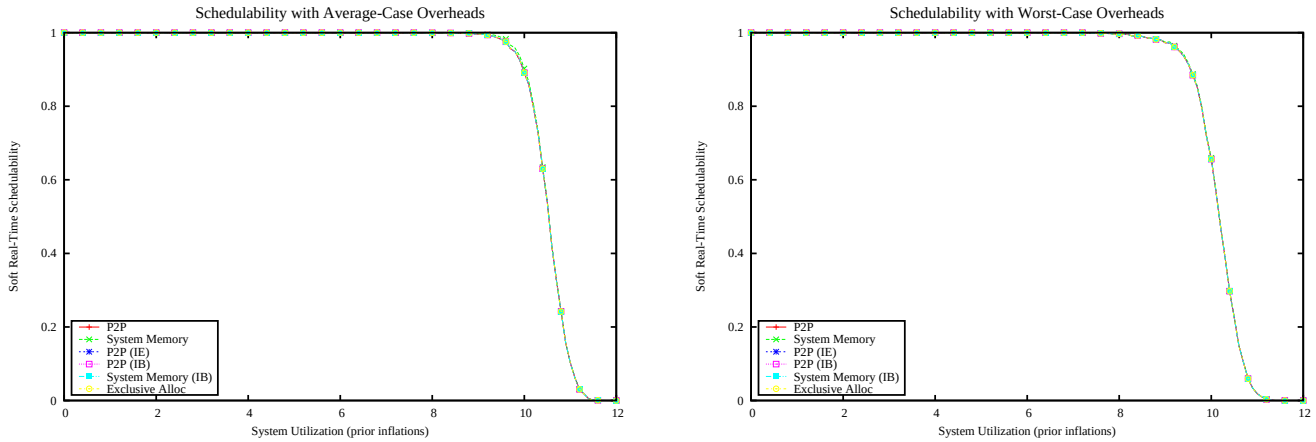

Figure 5207: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

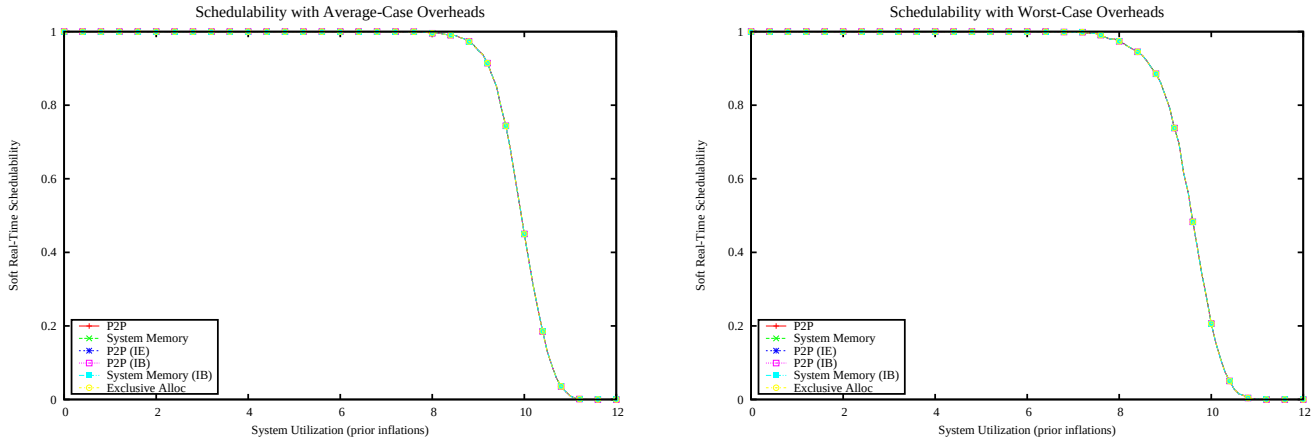

Figure 5208: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

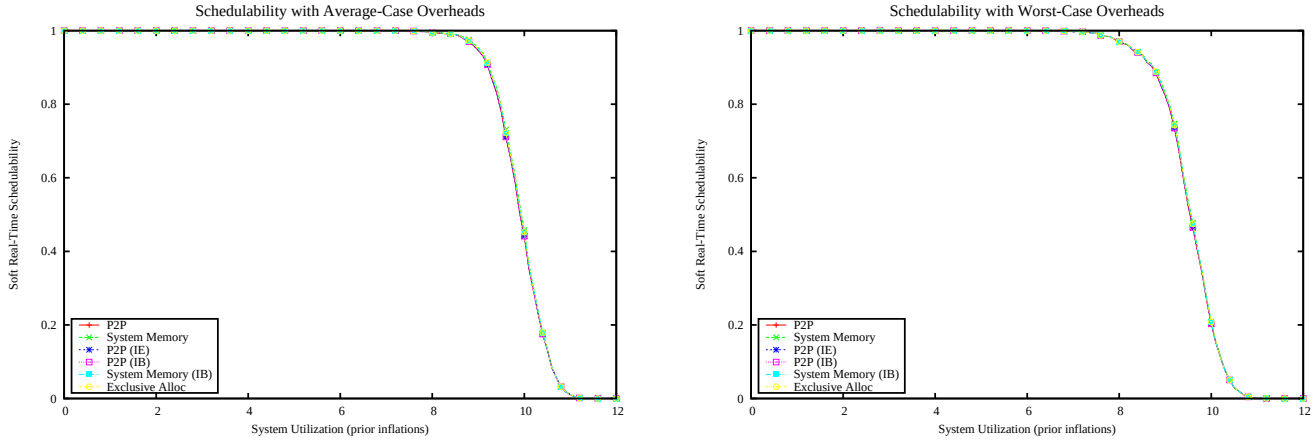

Figure 5209: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

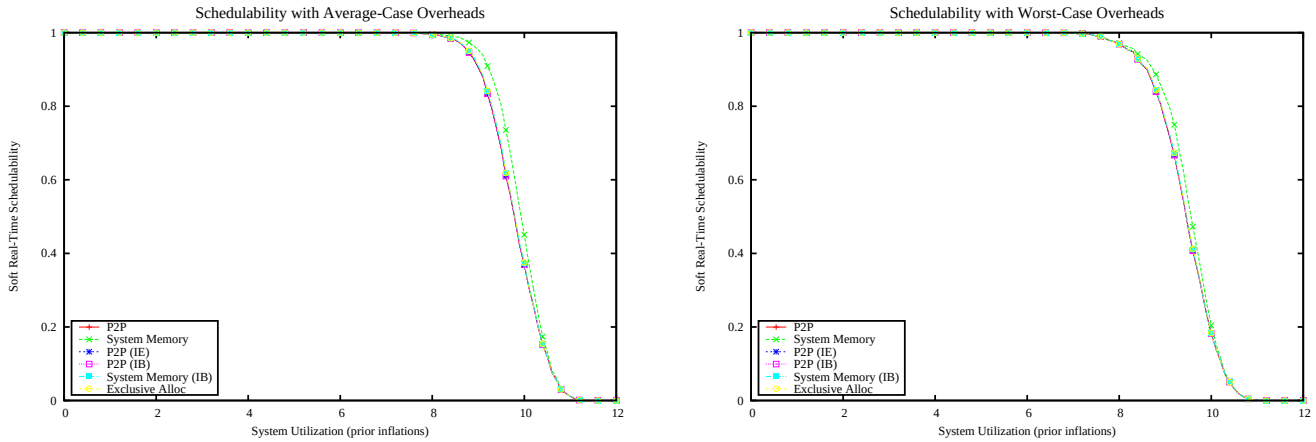

Figure 5210: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

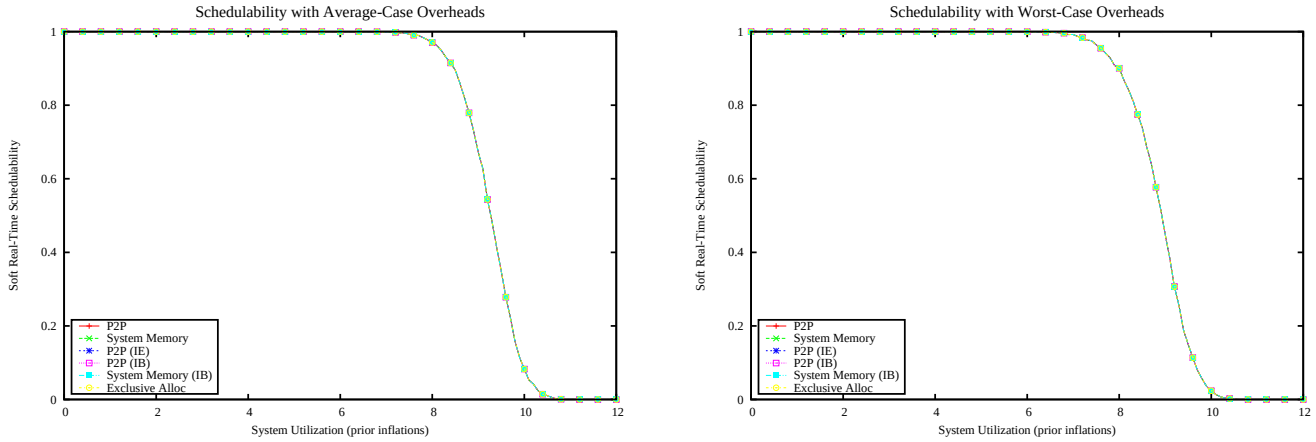

Figure 5211: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

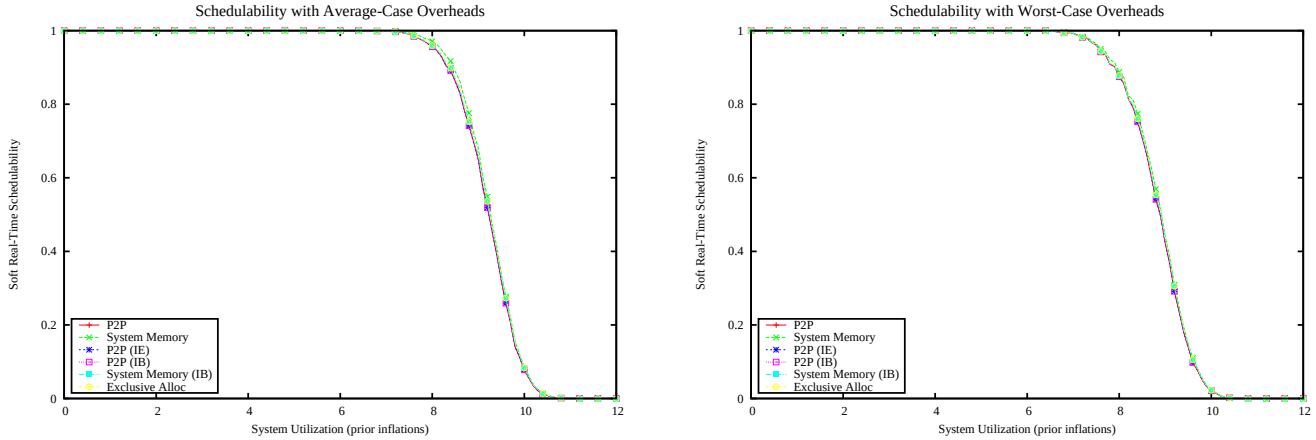

Figure 5212: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

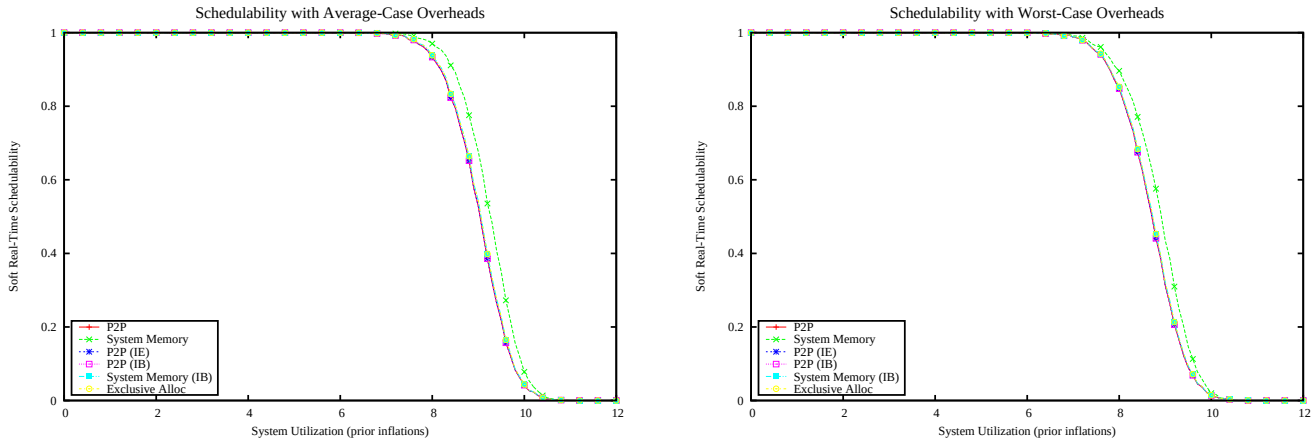

Figure 5213: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

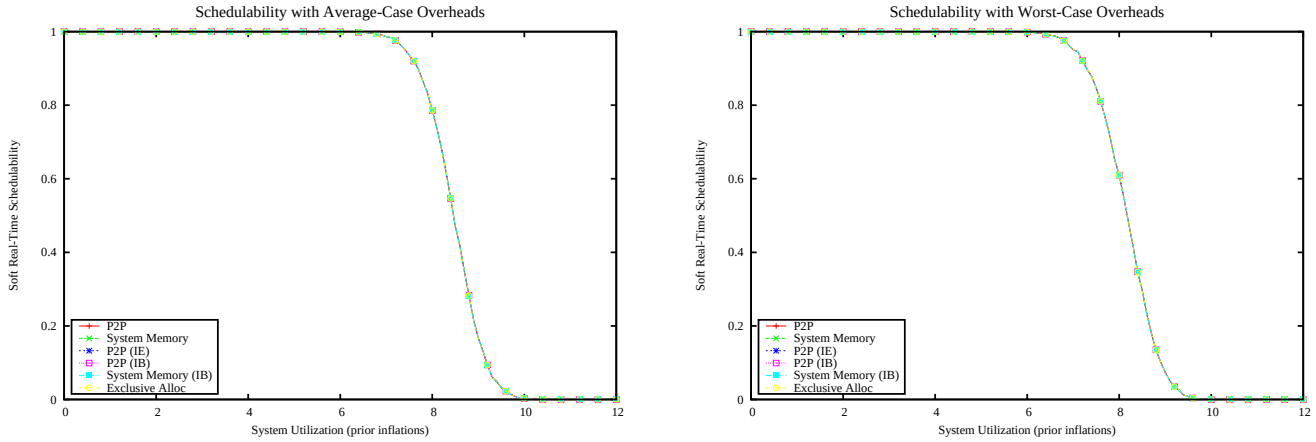

Figure 5214: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

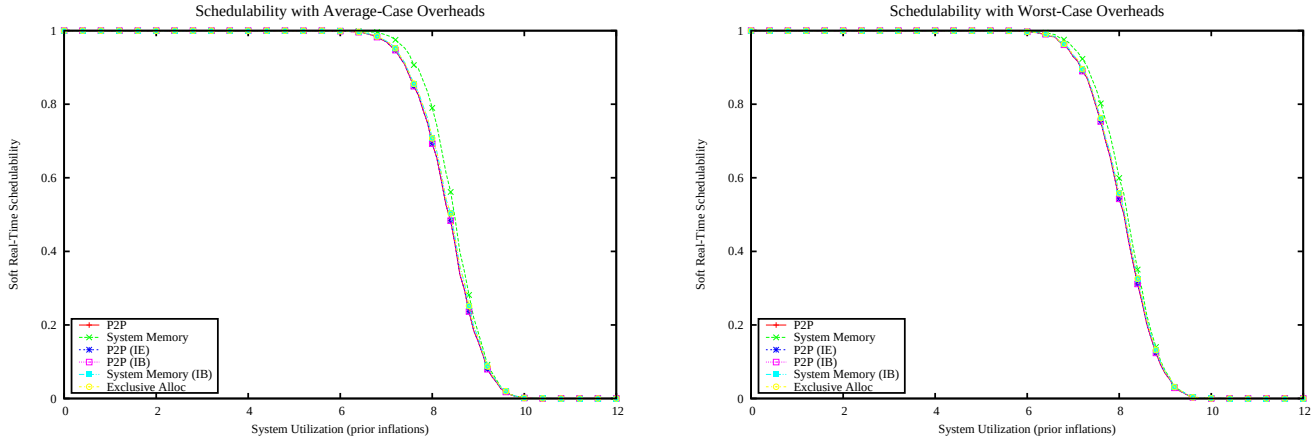

Figure 5215: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

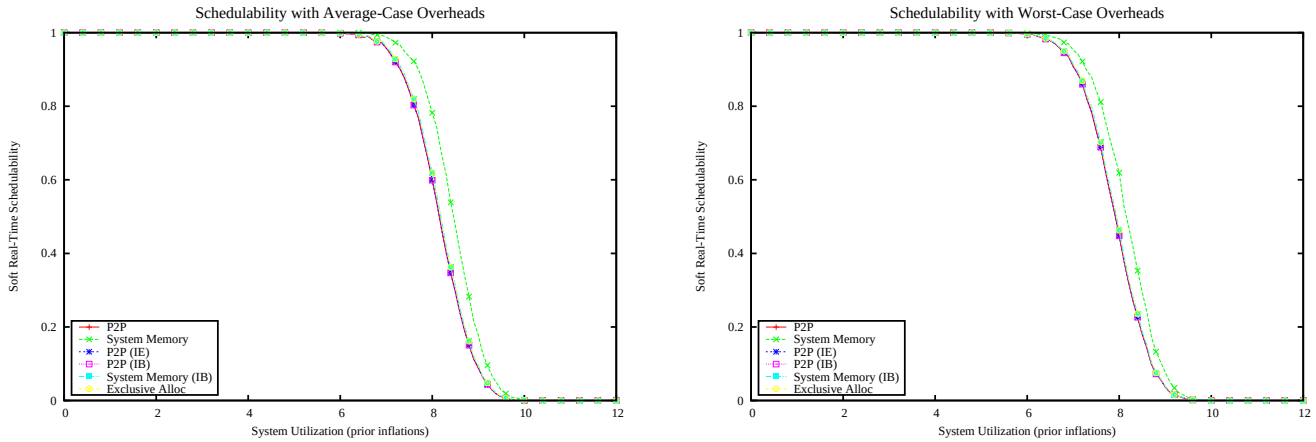

Figure 5216: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

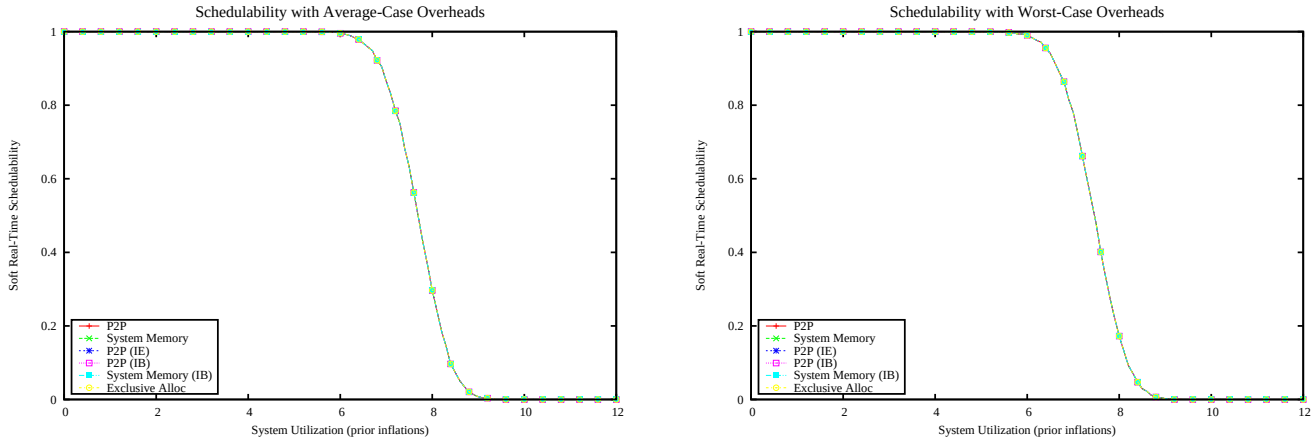

Figure 5217: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

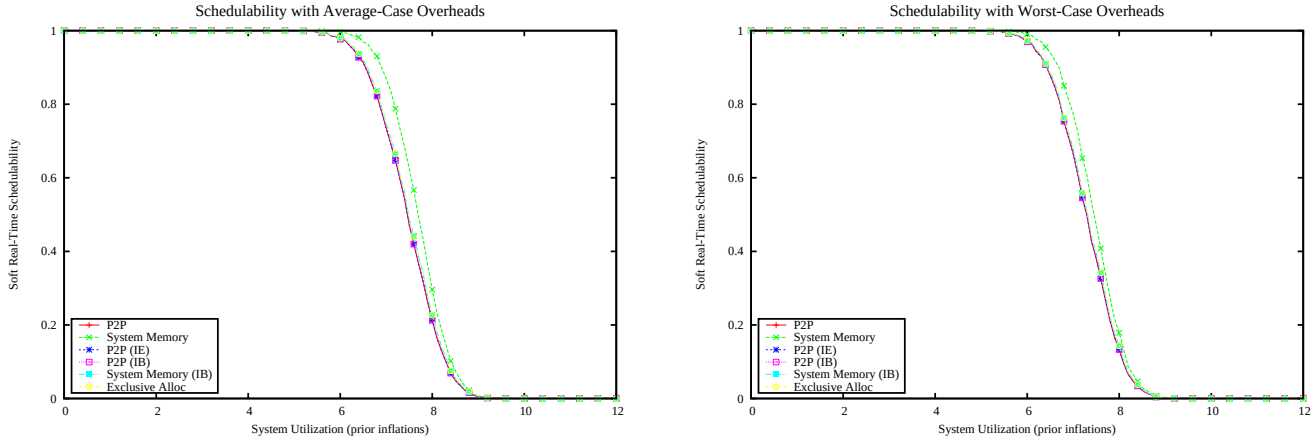

Figure 5218: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

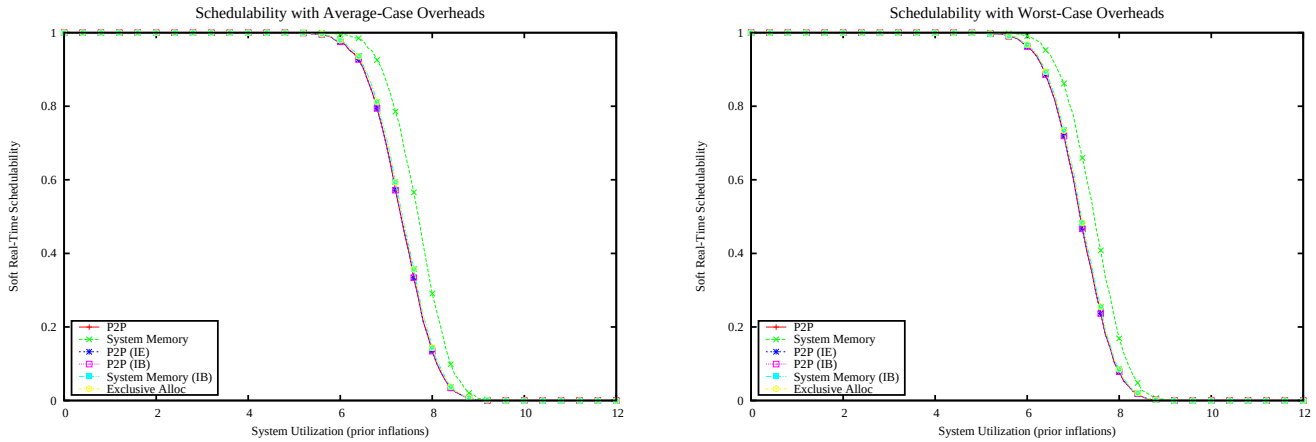

Figure 5219: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

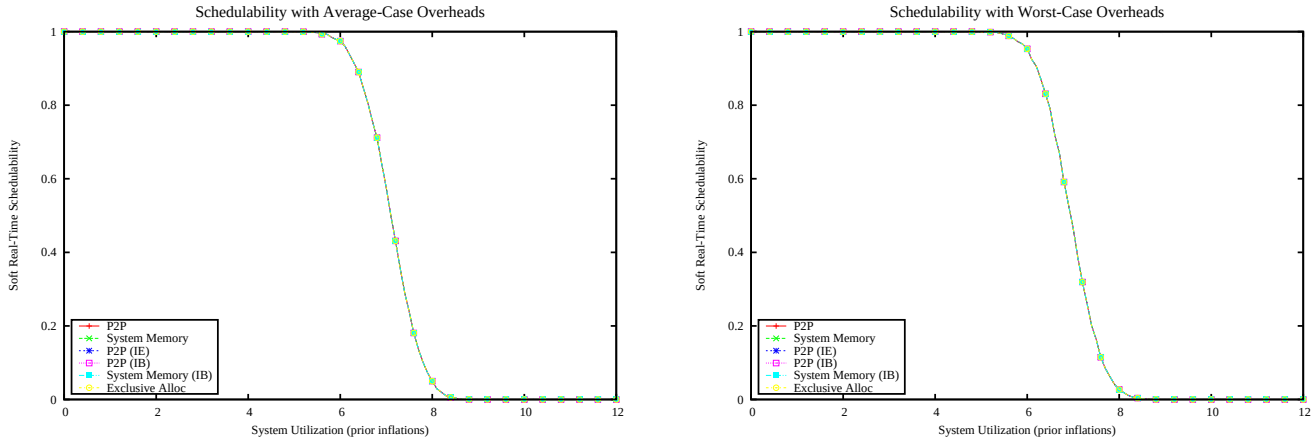

Figure 5220: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

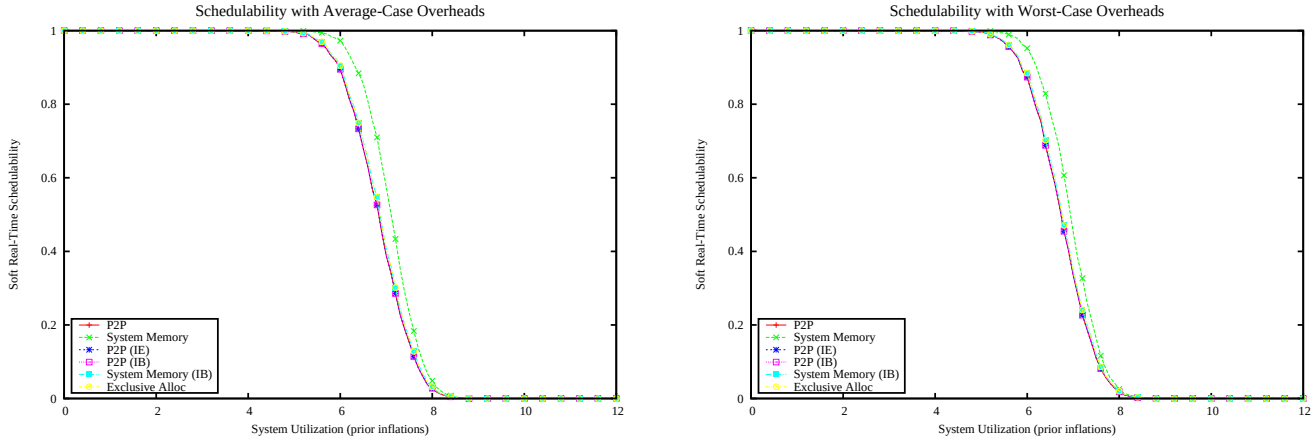

Figure 5221: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

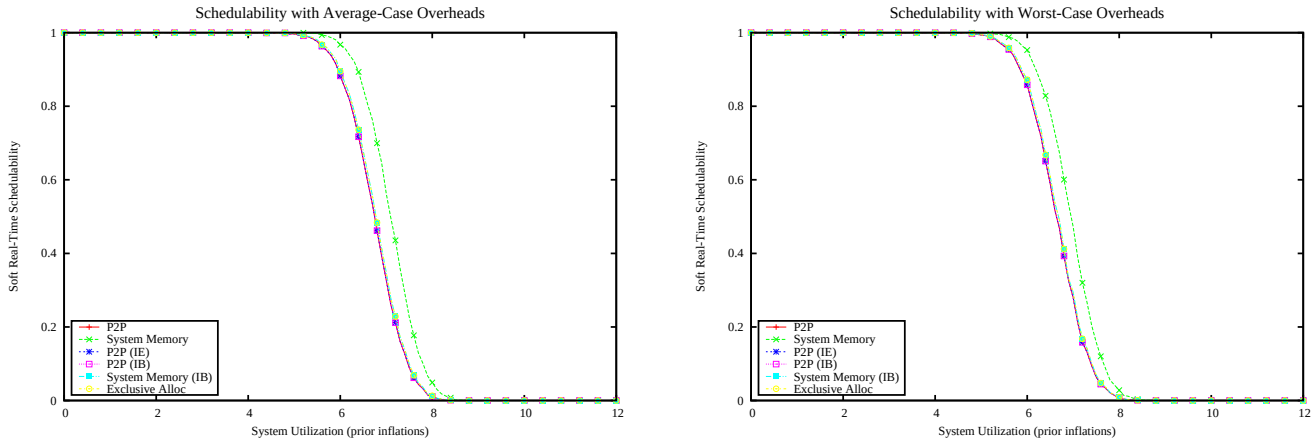

Figure 5222: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

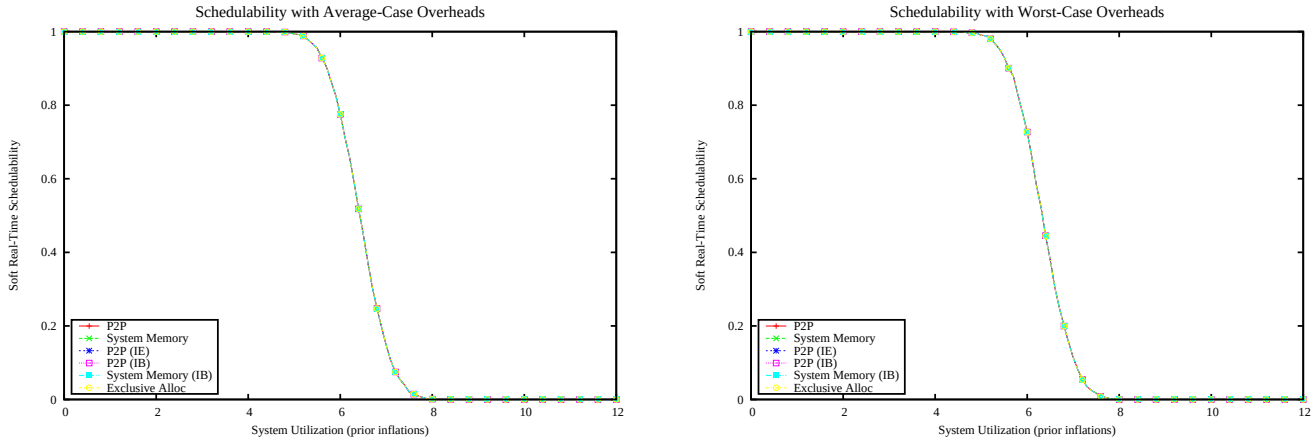

Figure 5223: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

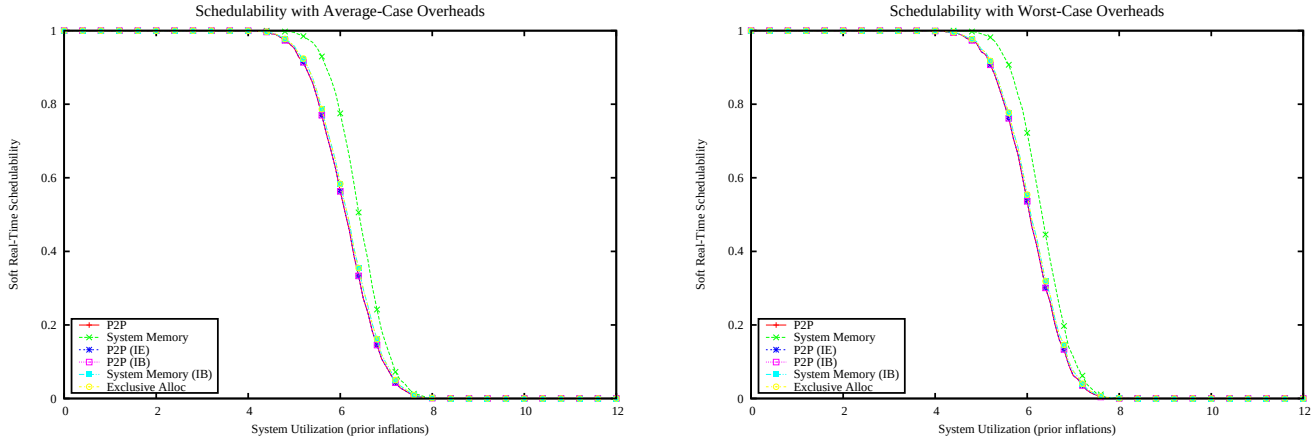

Figure 5224: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

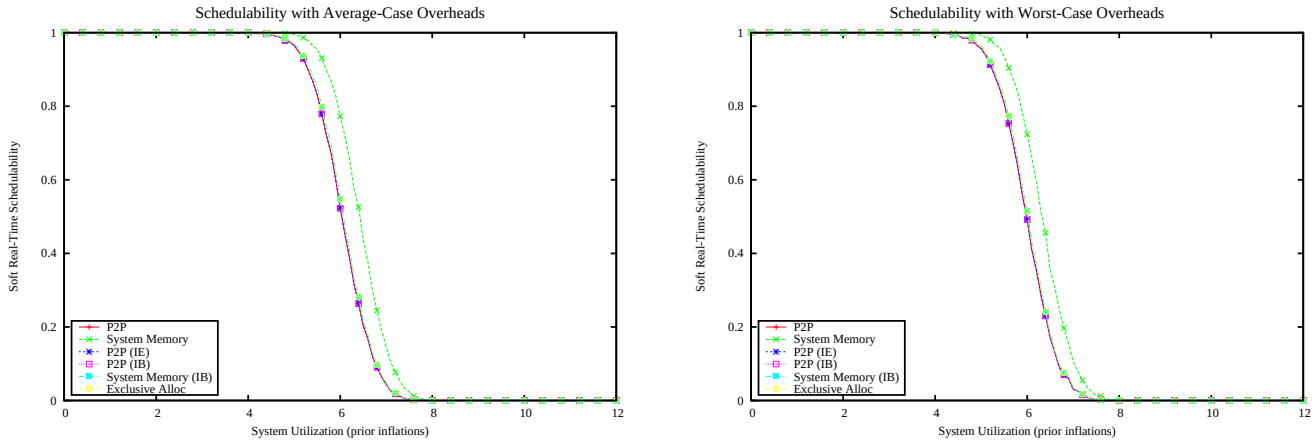

Figure 5225: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

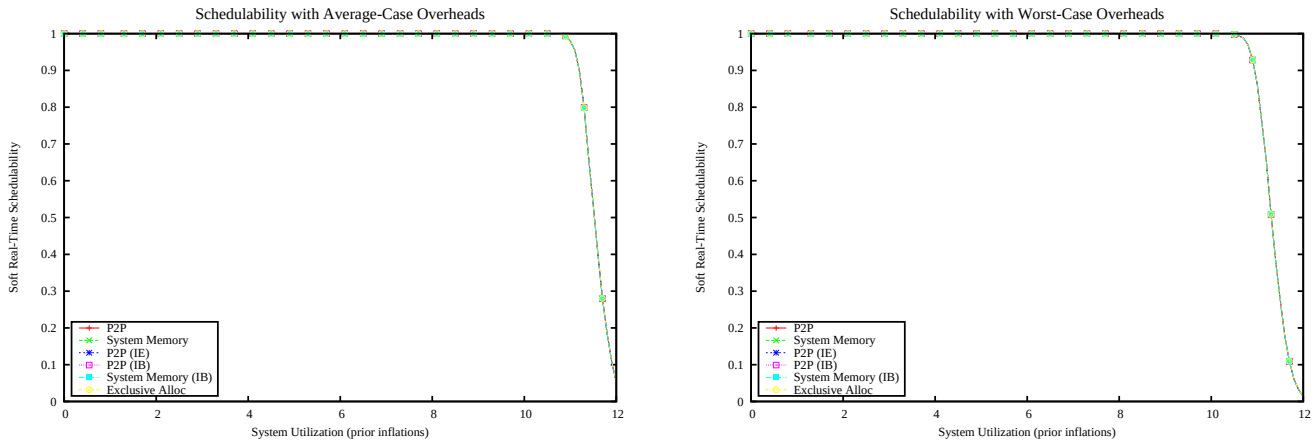

Figure 5226: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

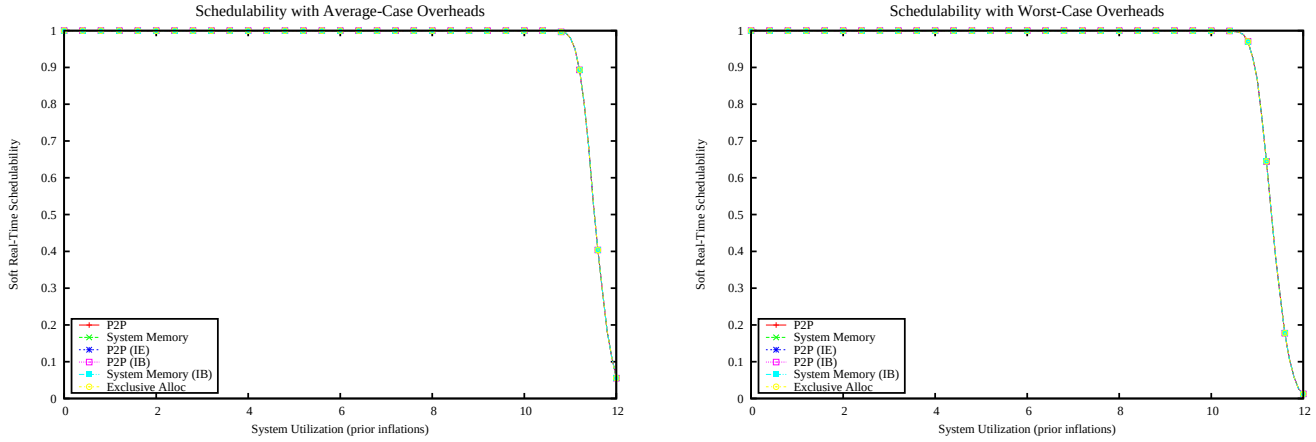

Figure 5227: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

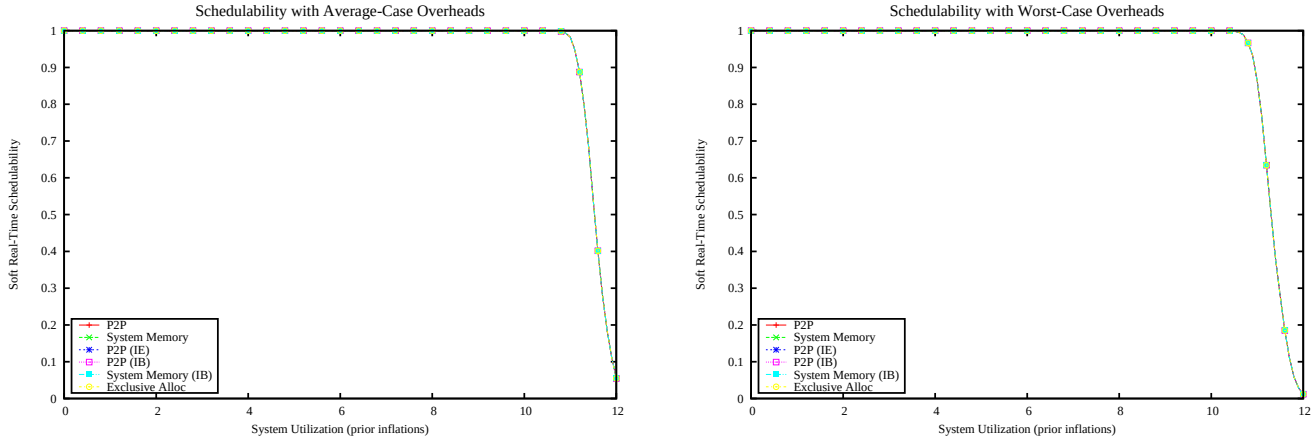

Figure 5228: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

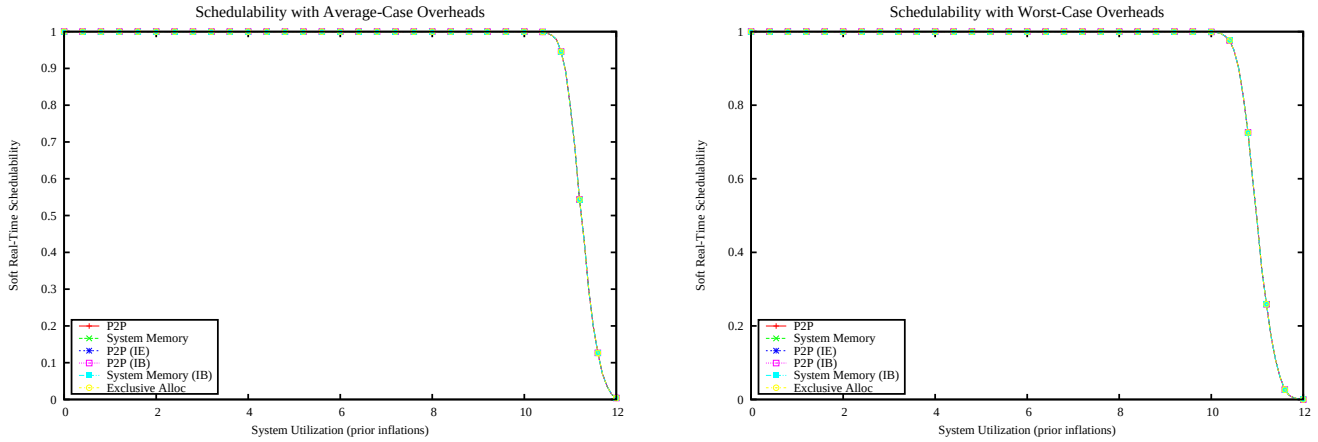

Figure 5229: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

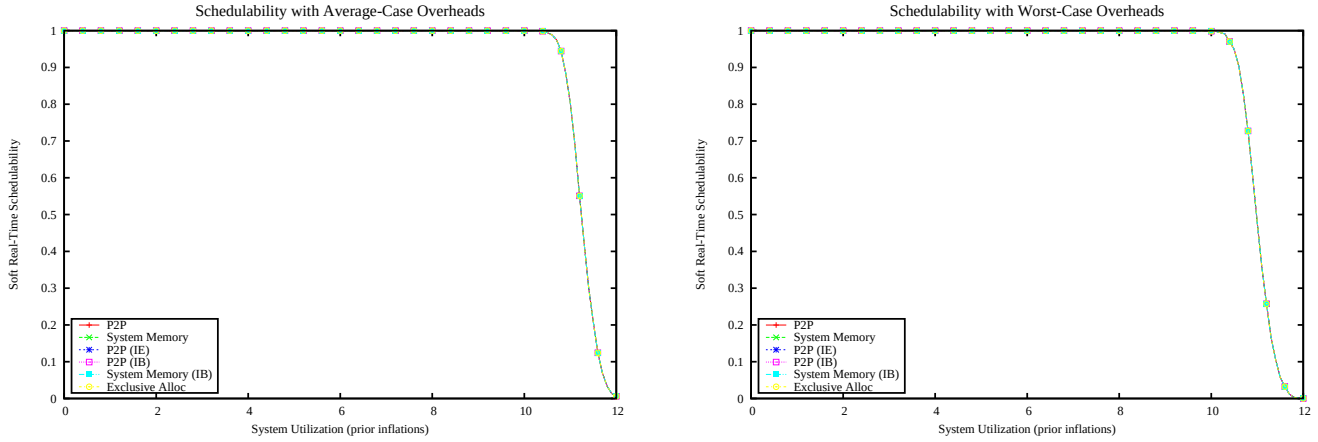

Figure 5230: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

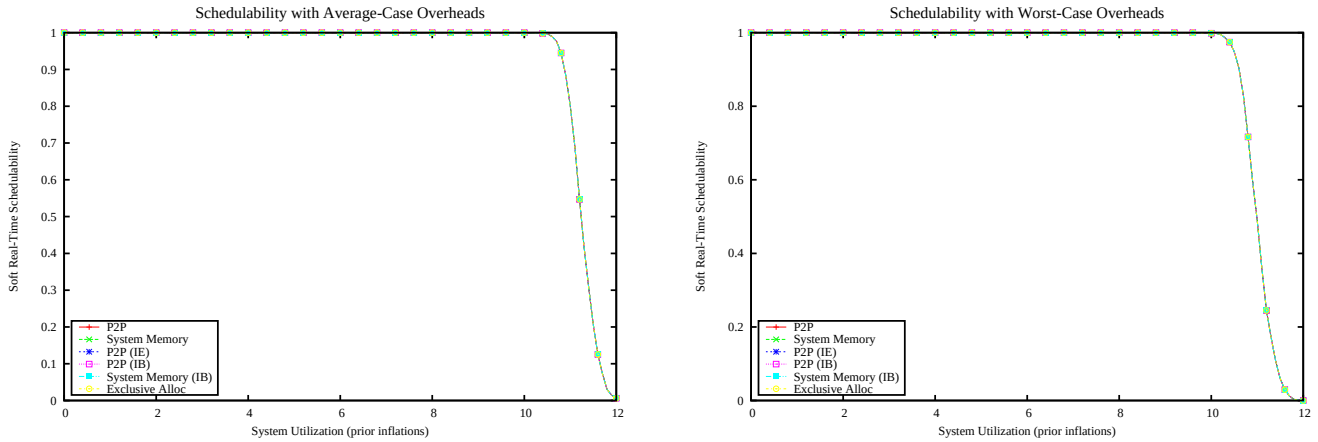

Figure 5231: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

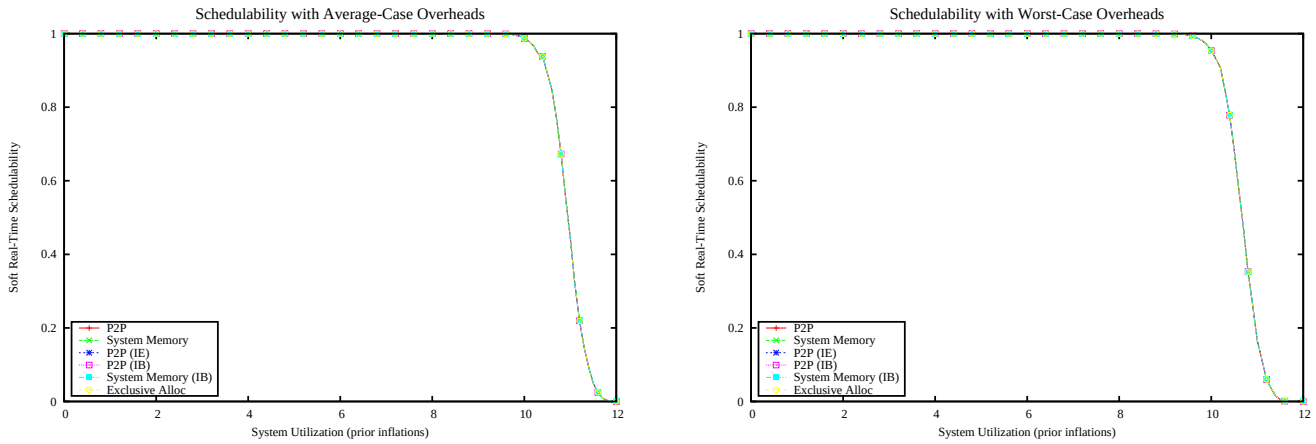

Figure 5232: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

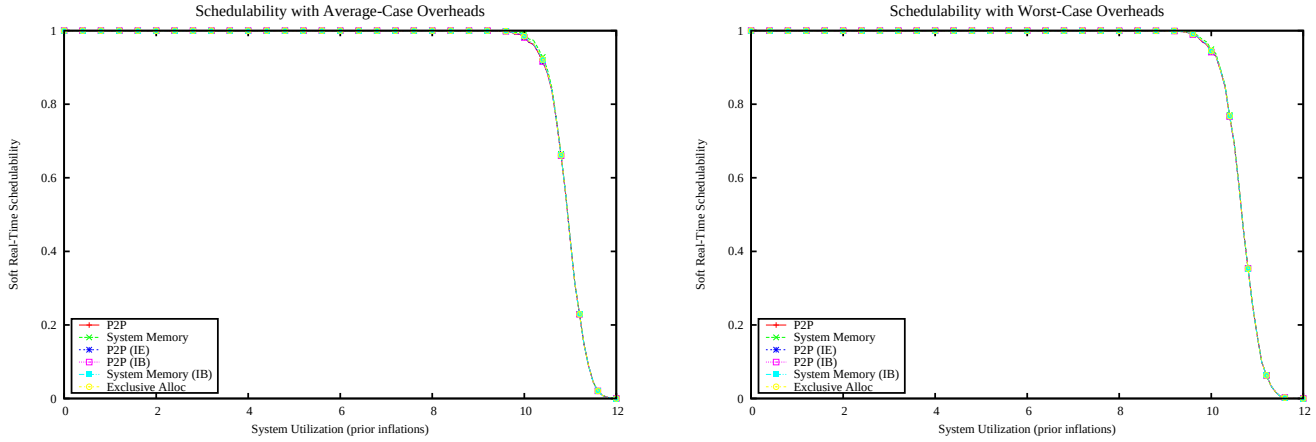

Figure 5233: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

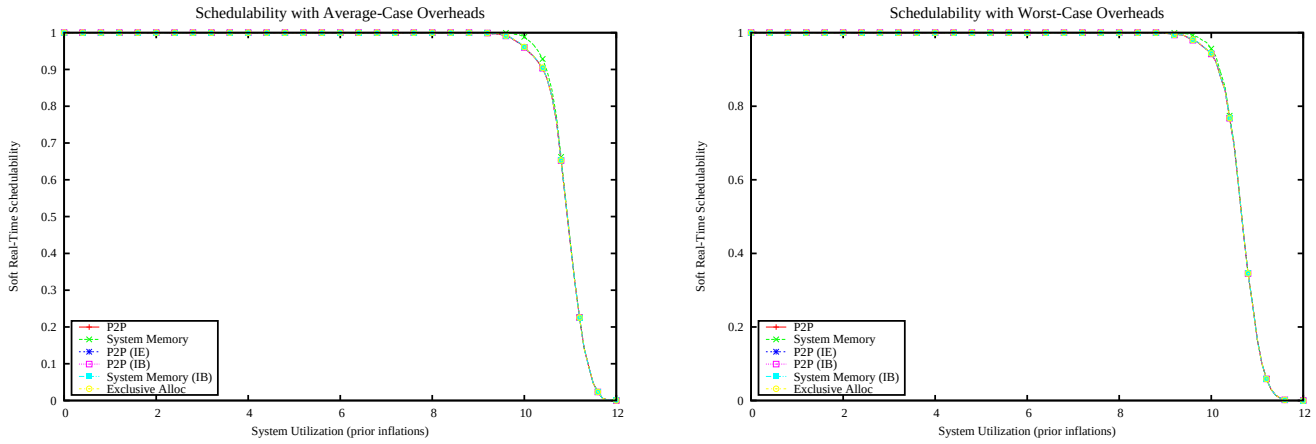

Figure 5234: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

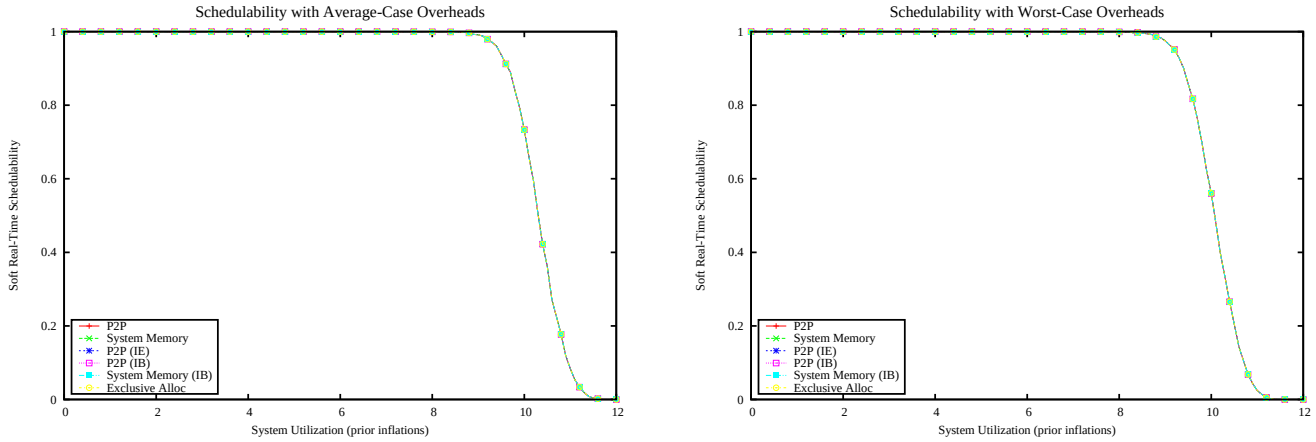

Figure 5235: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

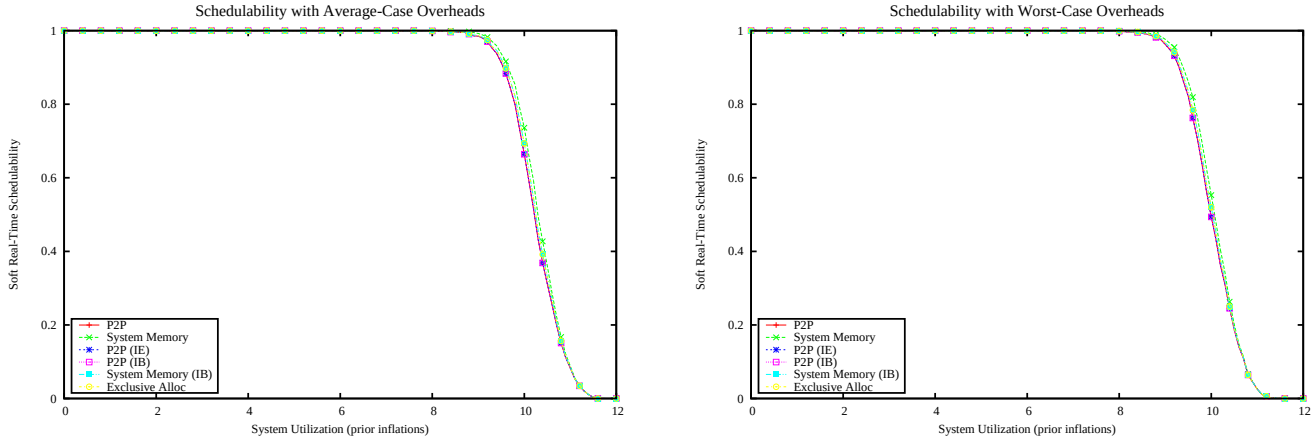

Figure 5236: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

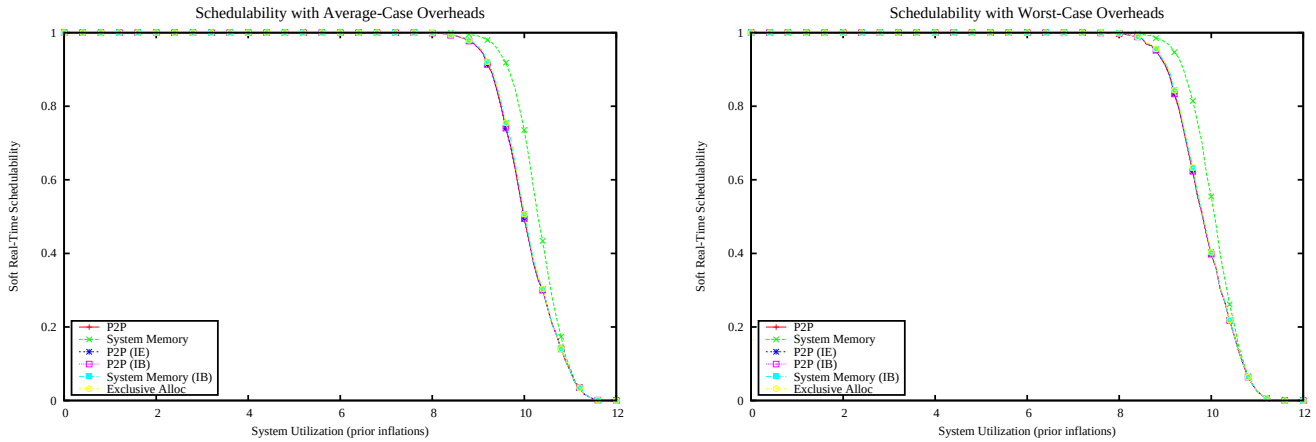

Figure 5237: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

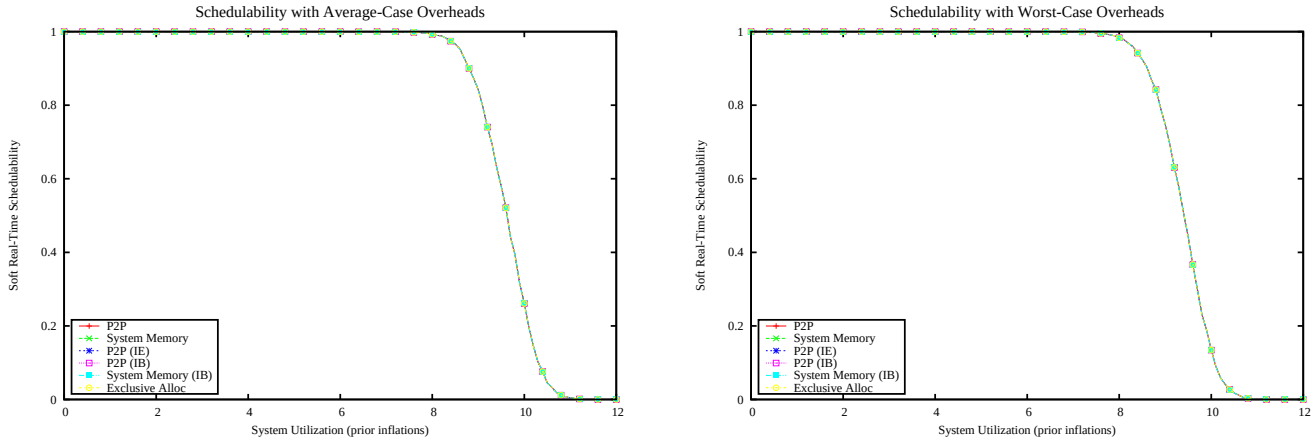

Figure 5238: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

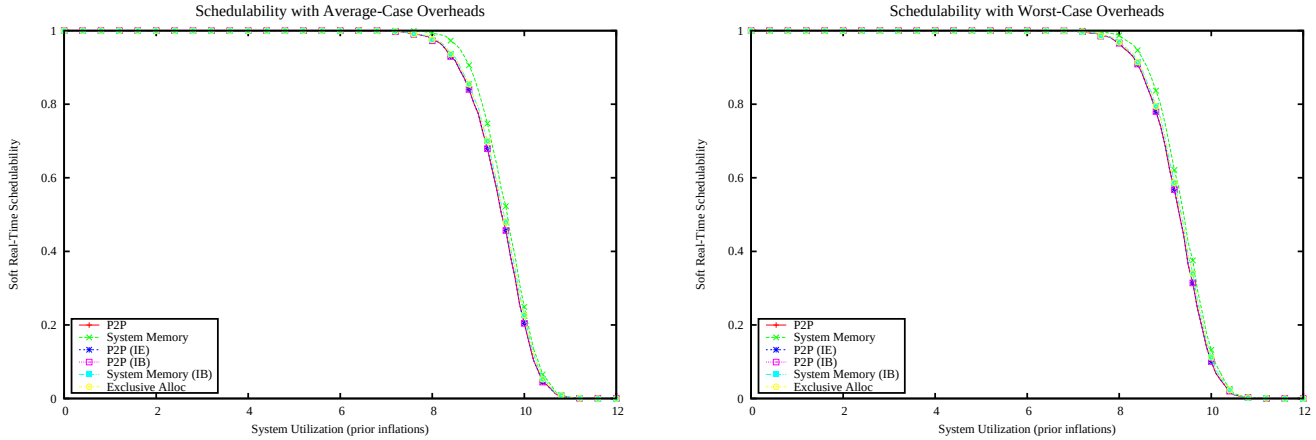

Figure 5239: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

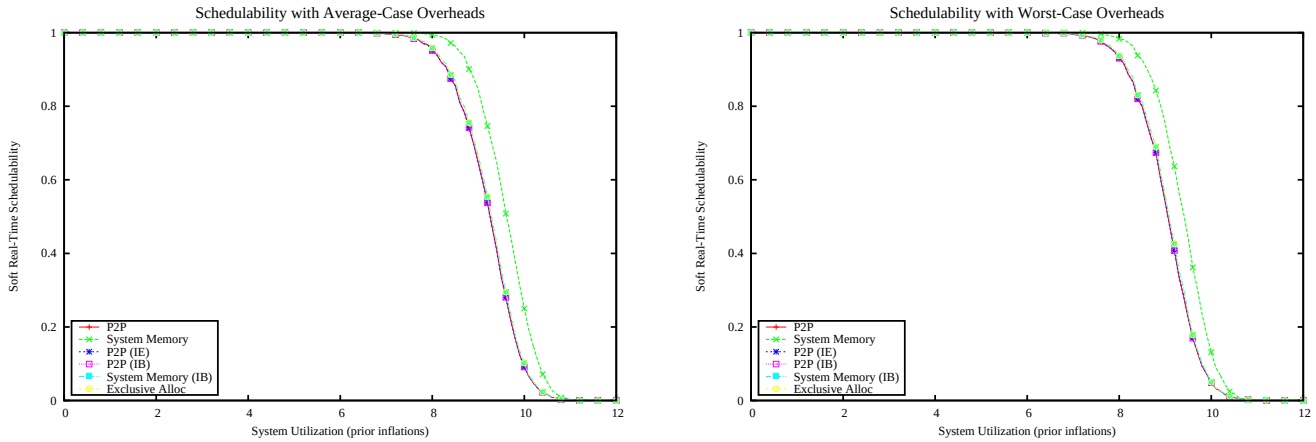

Figure 5240: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

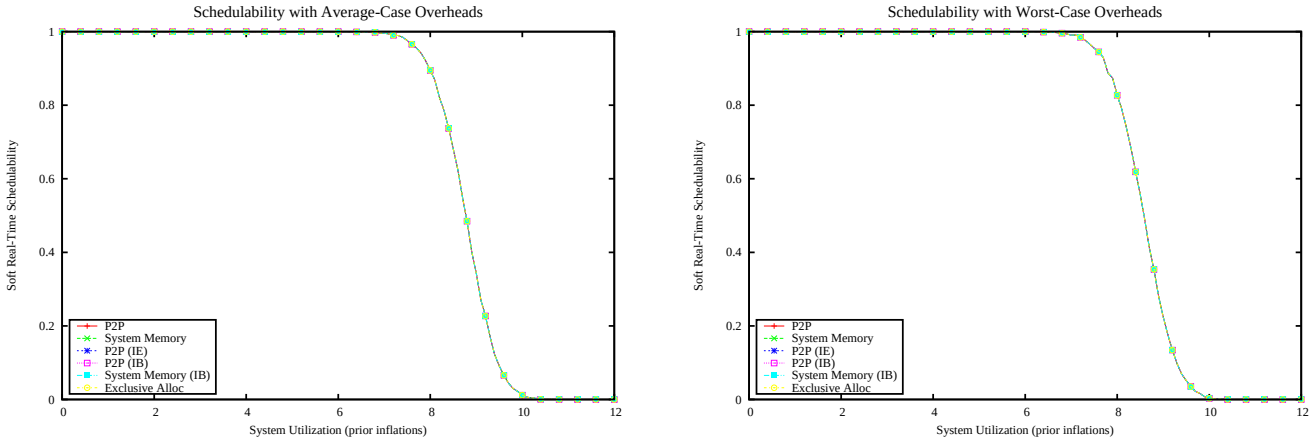

Figure 5241: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

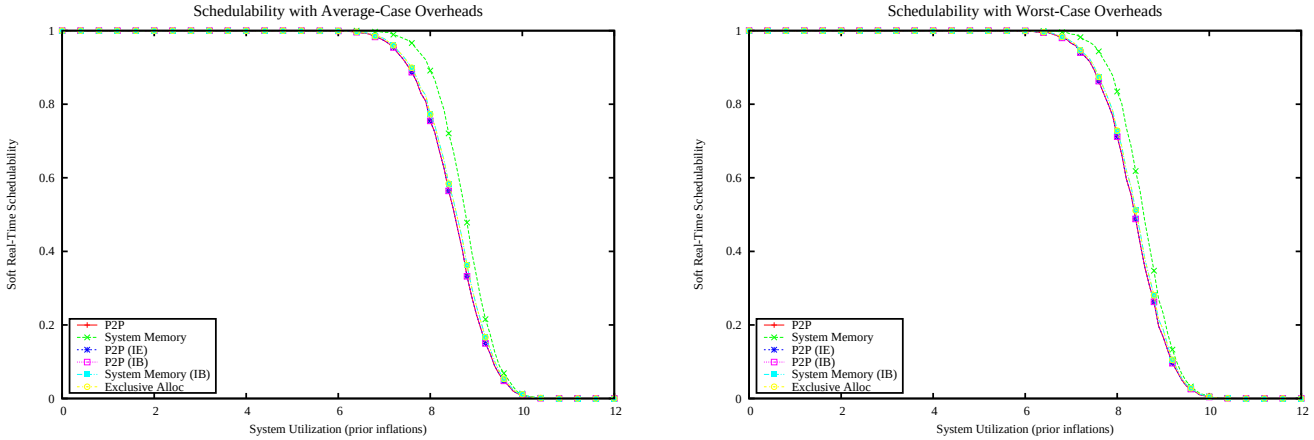

Figure 5242: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

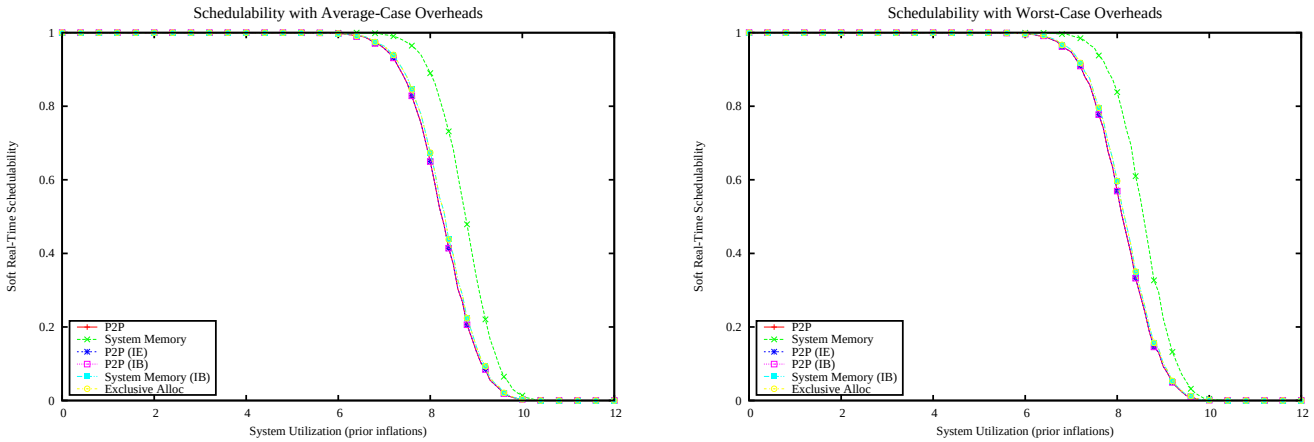

Figure 5243: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

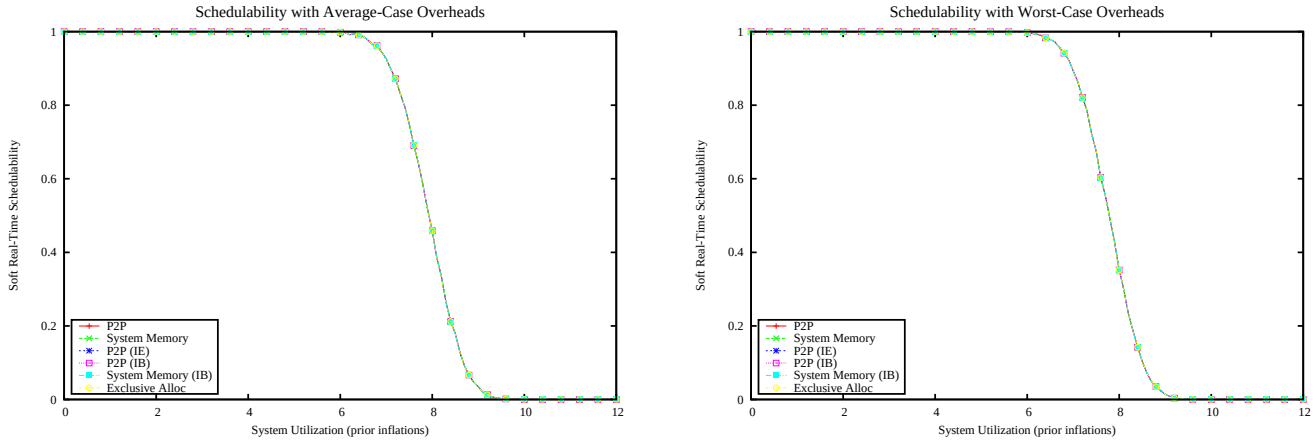

Figure 5244: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

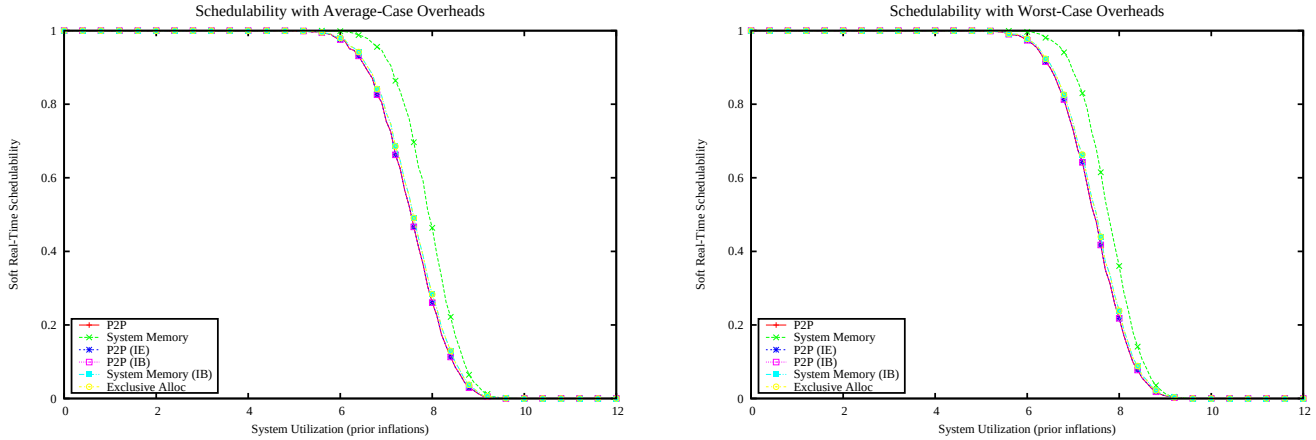

Figure 5245: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

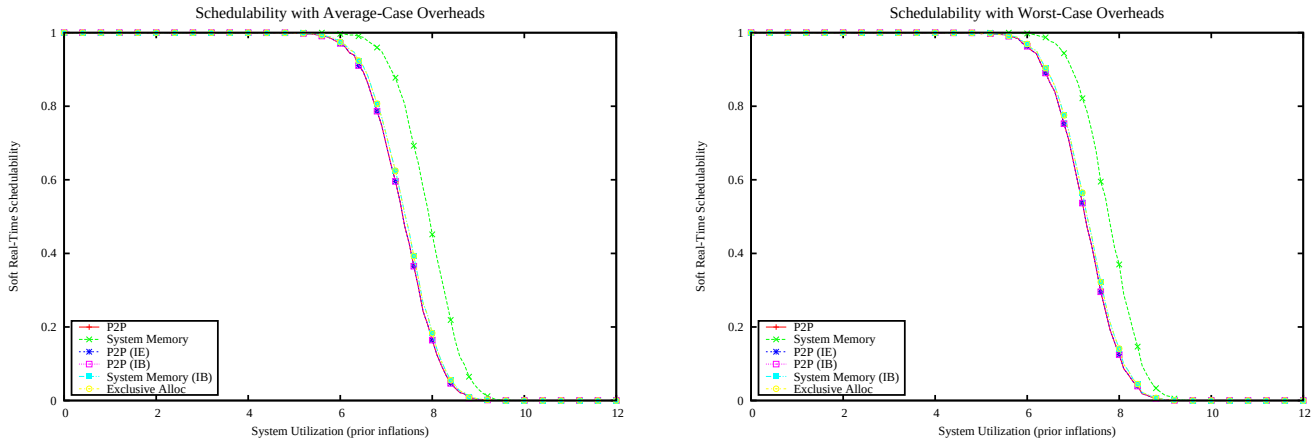

Figure 5246: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

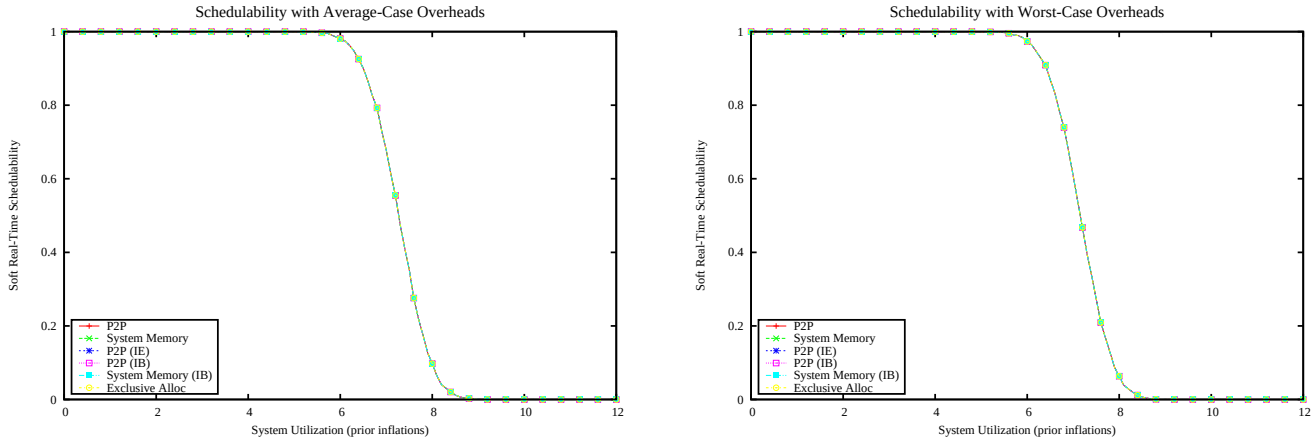

Figure 5247: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

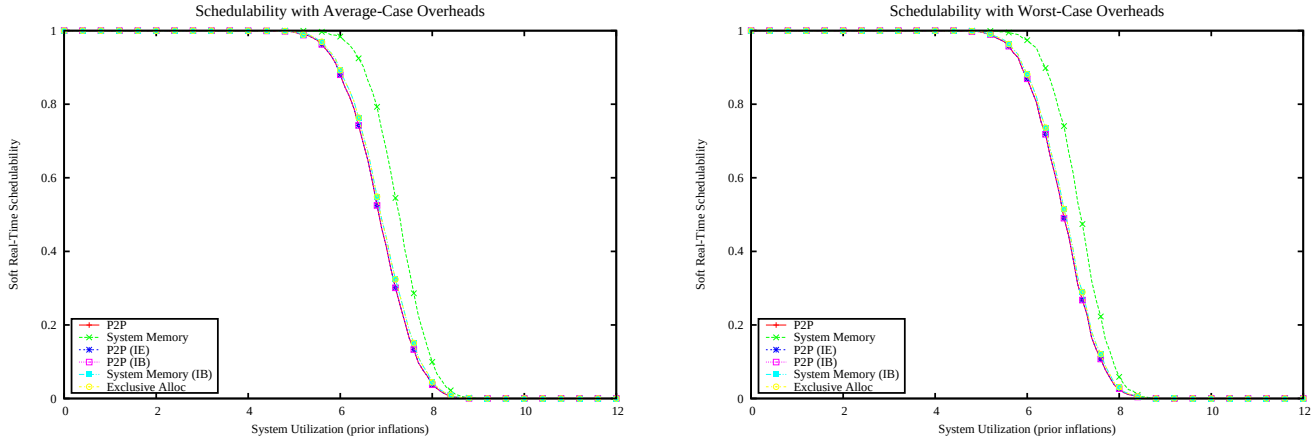

Figure 5248: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

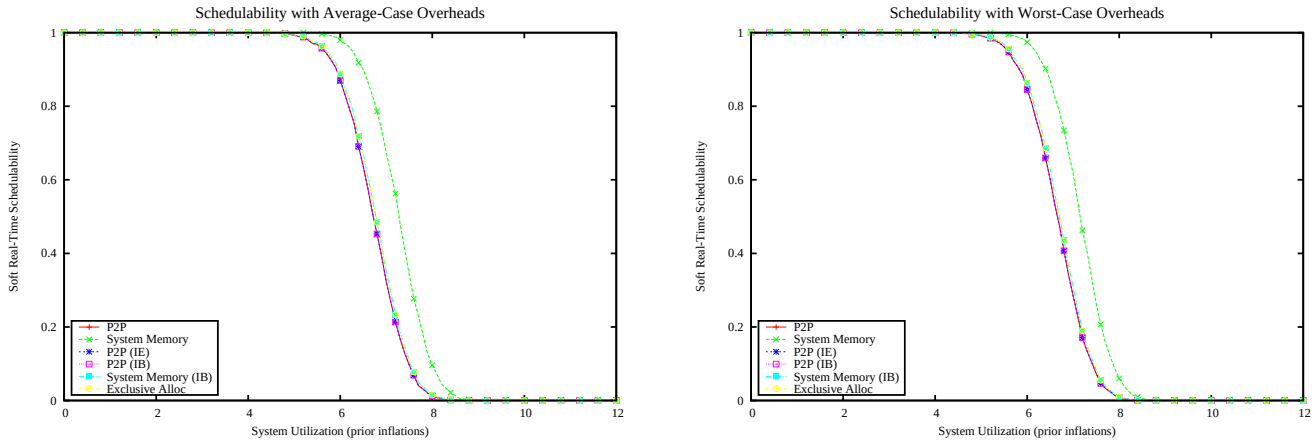

Figure 5249: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

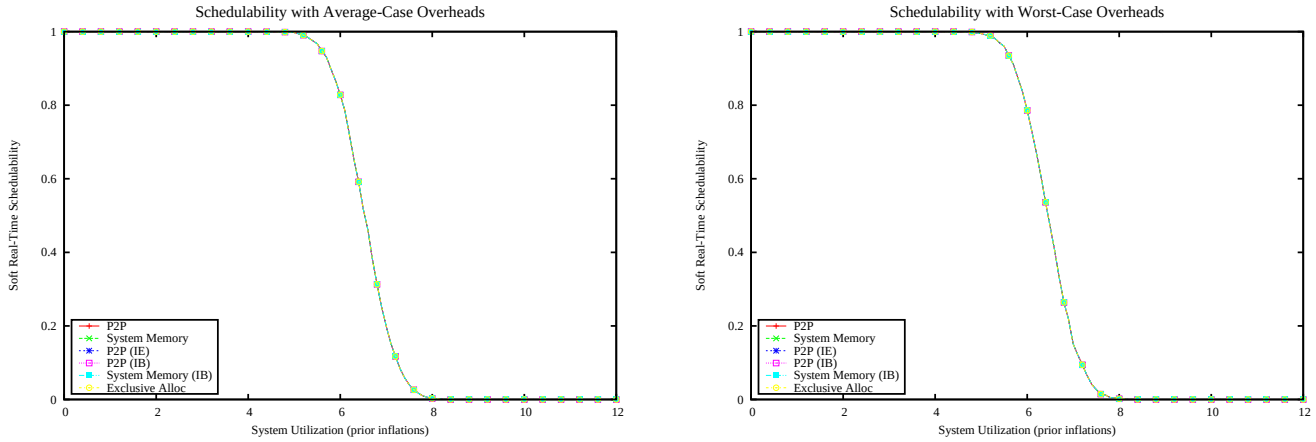

Figure 5250: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

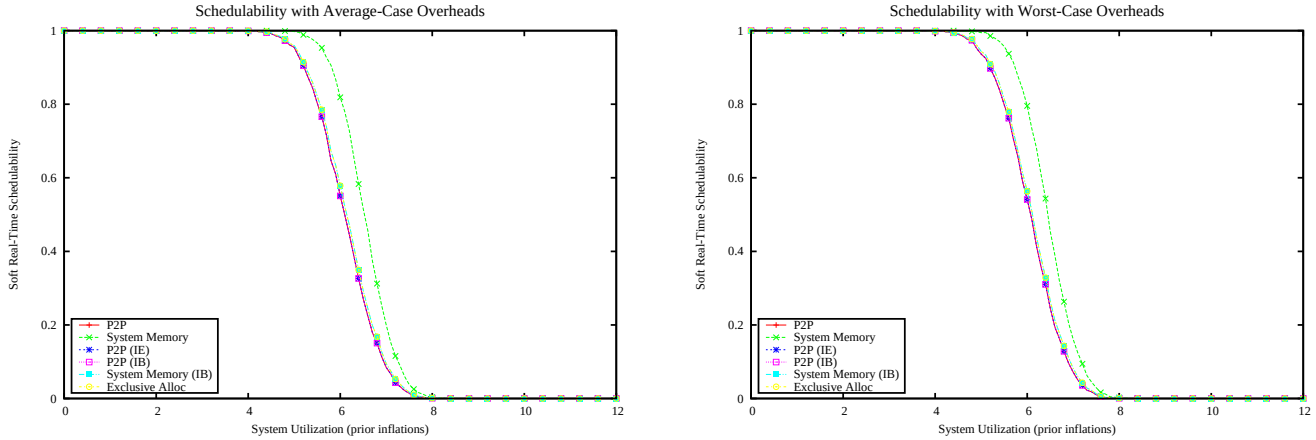

Figure 5251: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

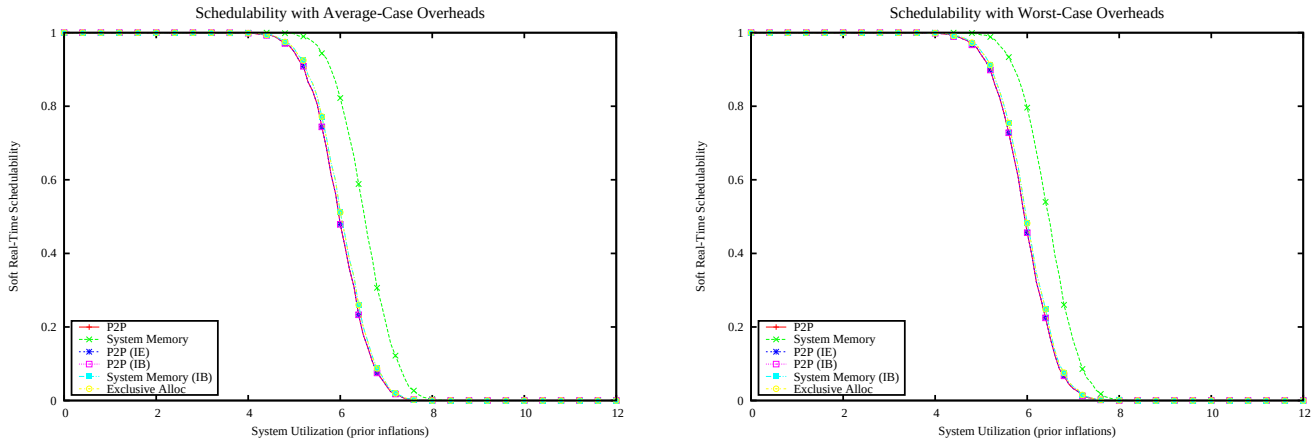

Figure 5252: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

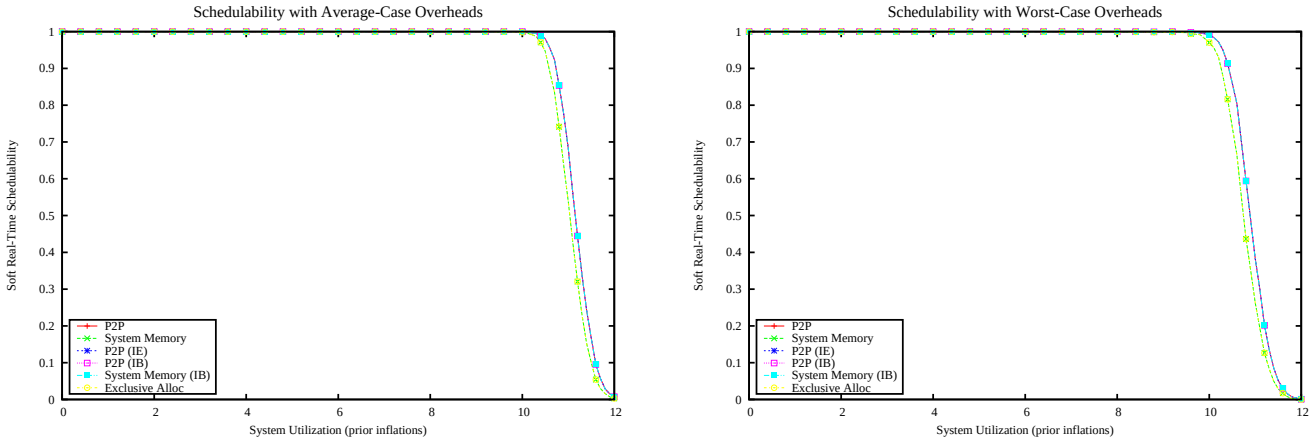

Figure 5253: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

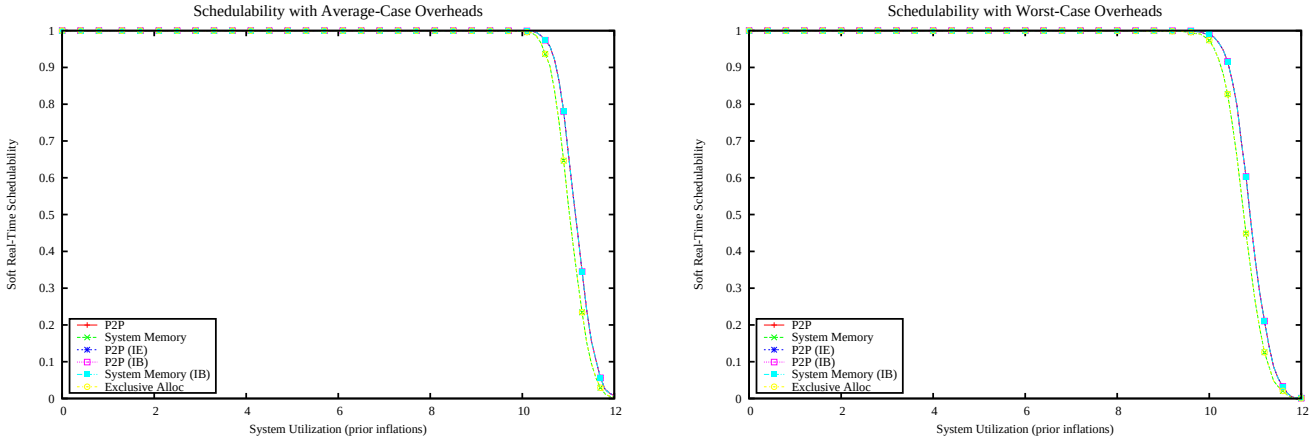

Figure 5254: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

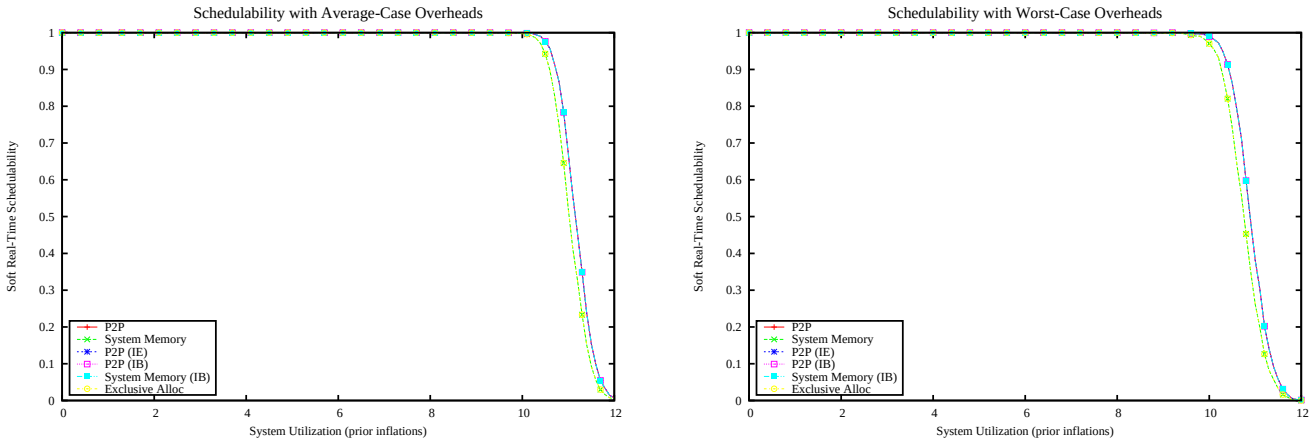

Figure 5255: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

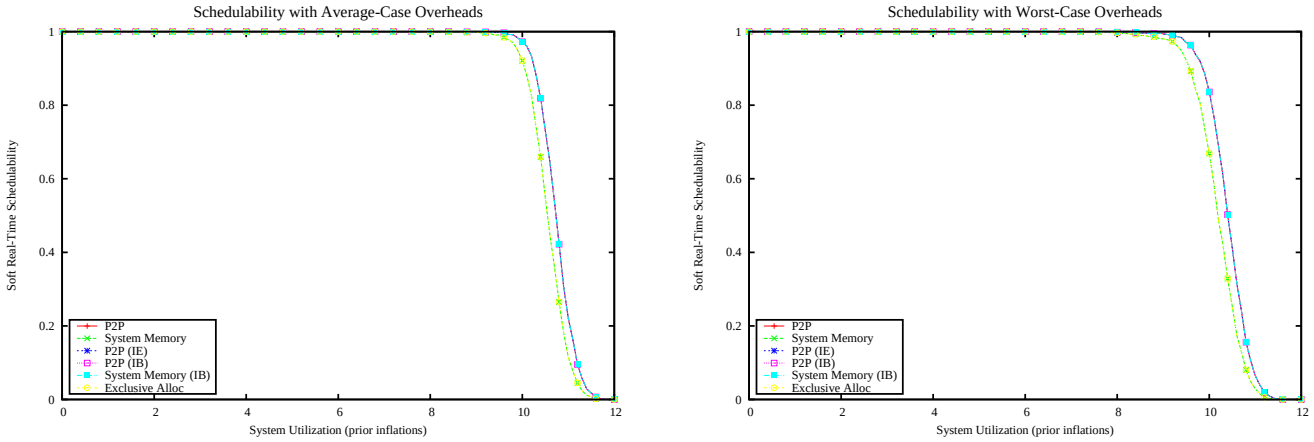

Figure 5256: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

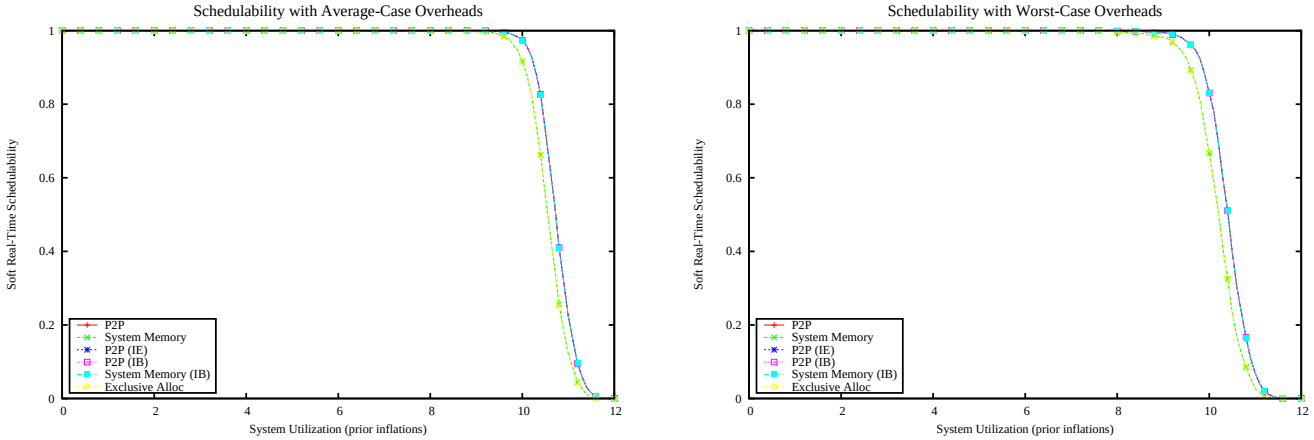

Figure 5257: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

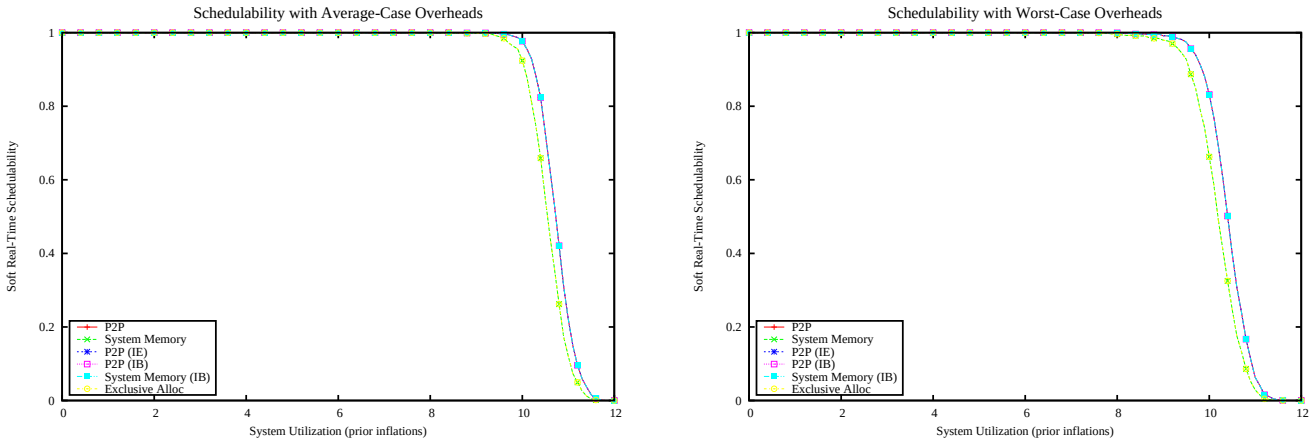

Figure 5258: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

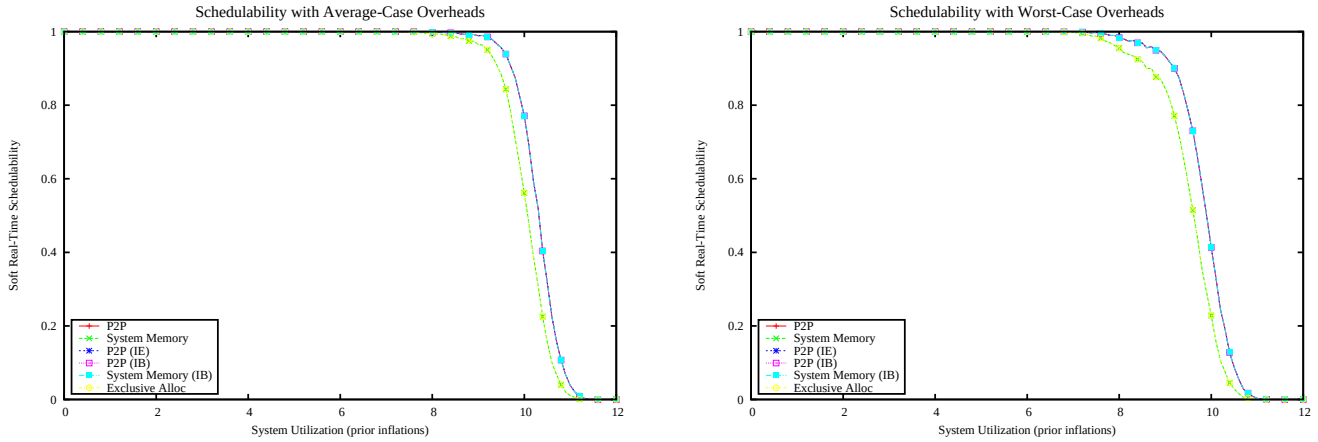

Figure 5259: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

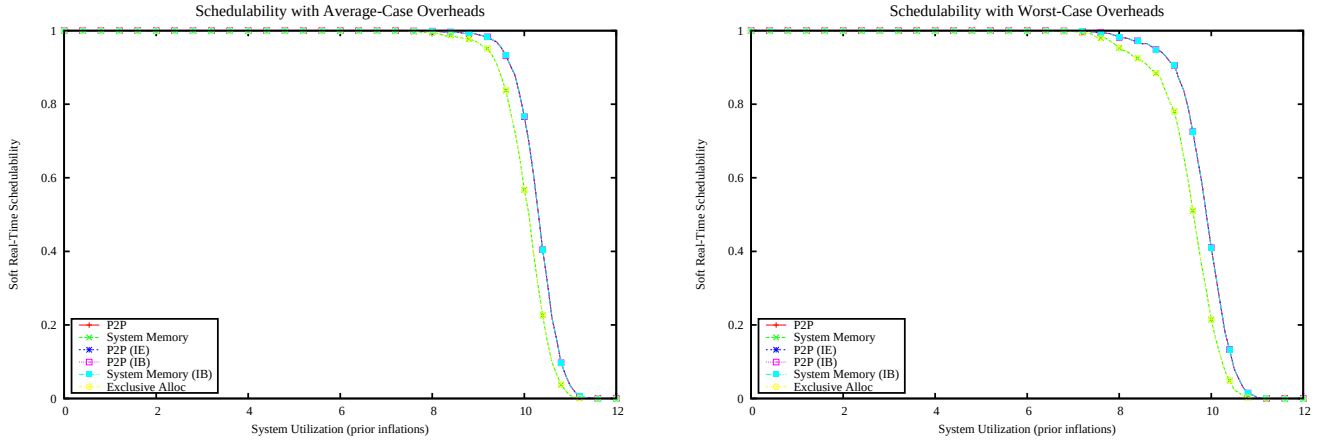

Figure 5260: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

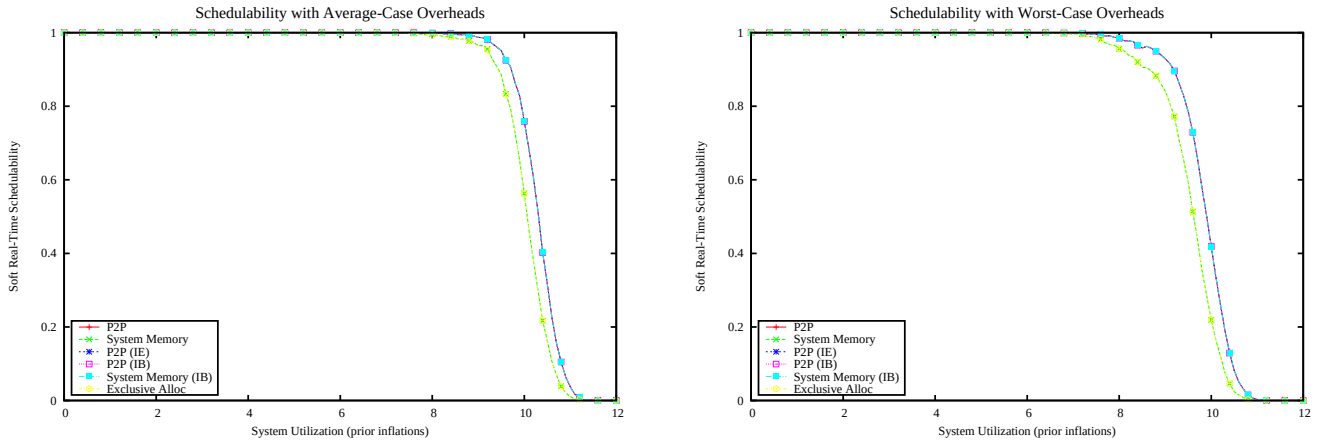

Figure 5261: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

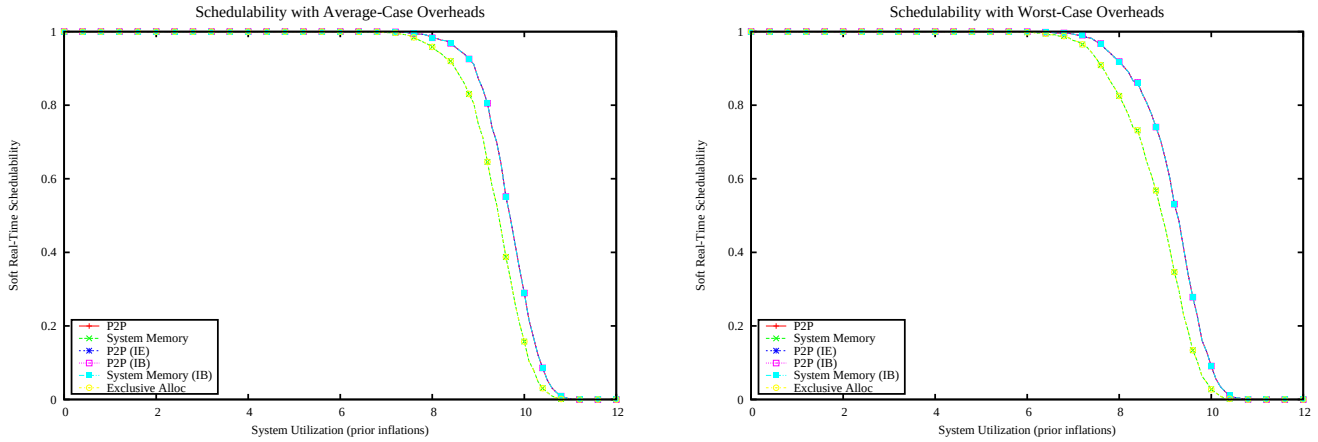

Figure 5262: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

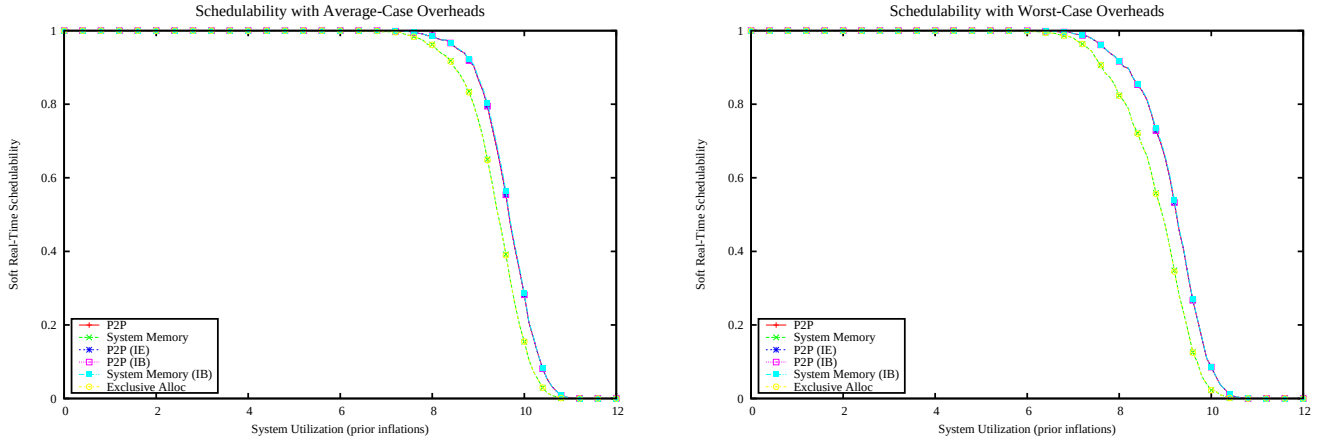

Figure 5263: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

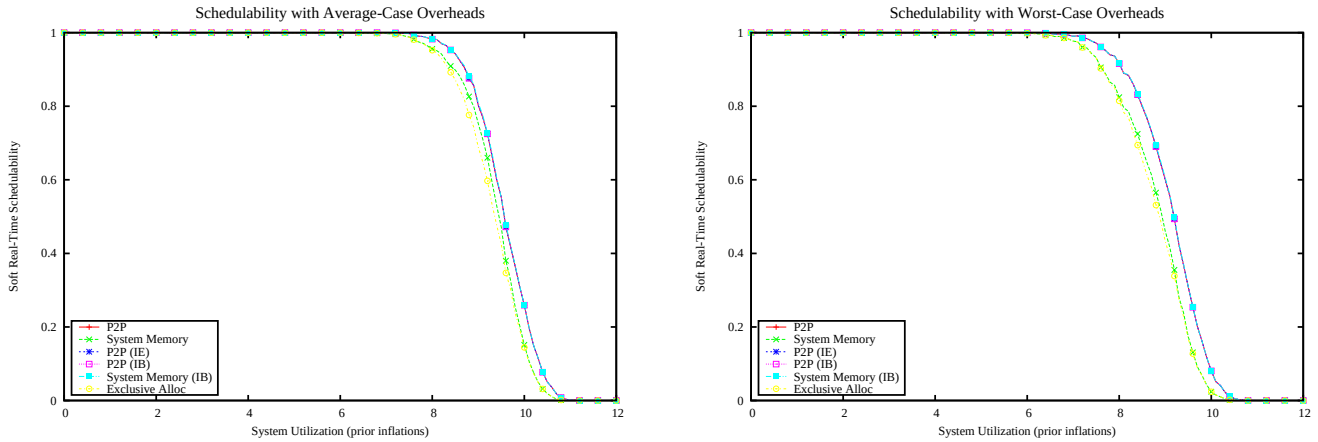

Figure 5264: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

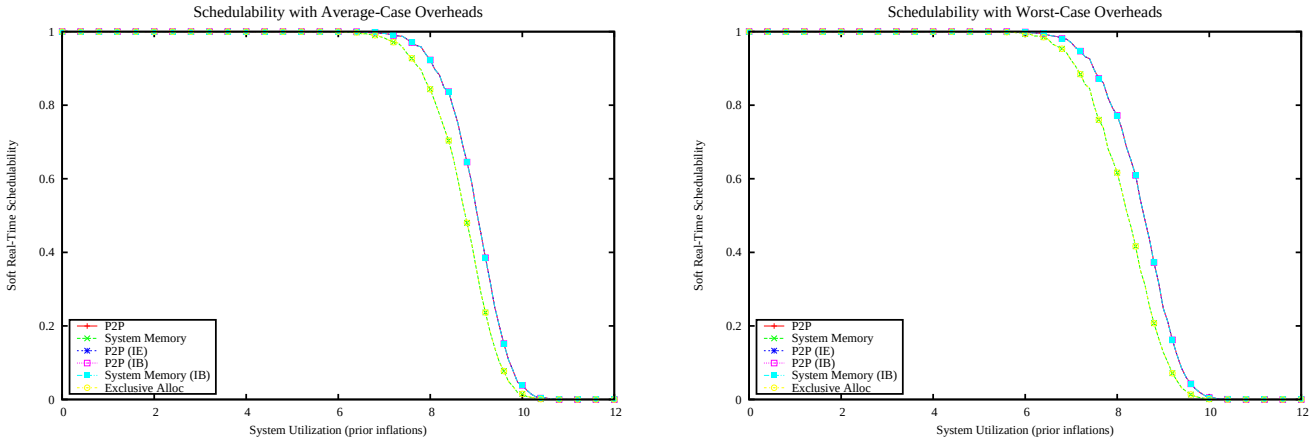

Figure 5265: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

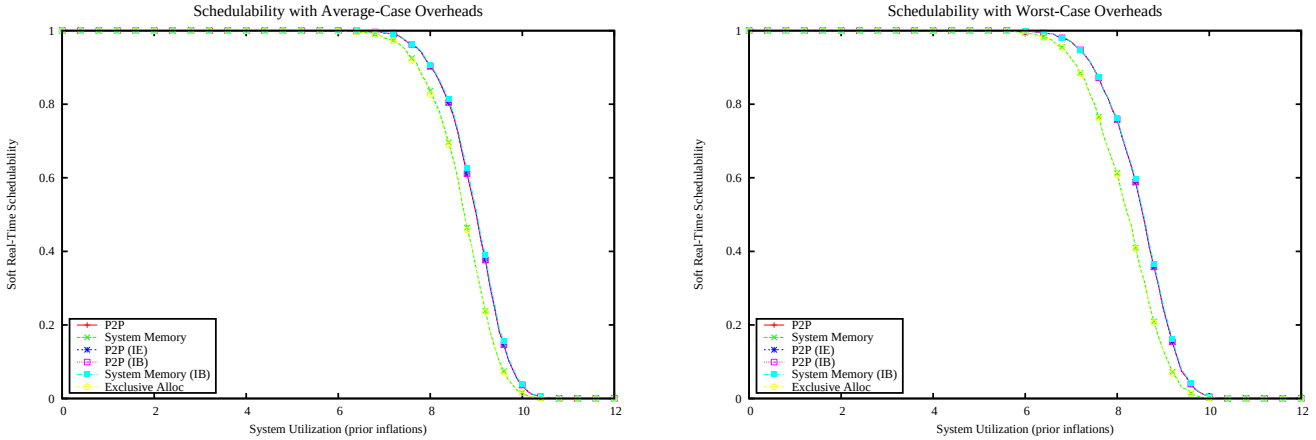

Figure 5266: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

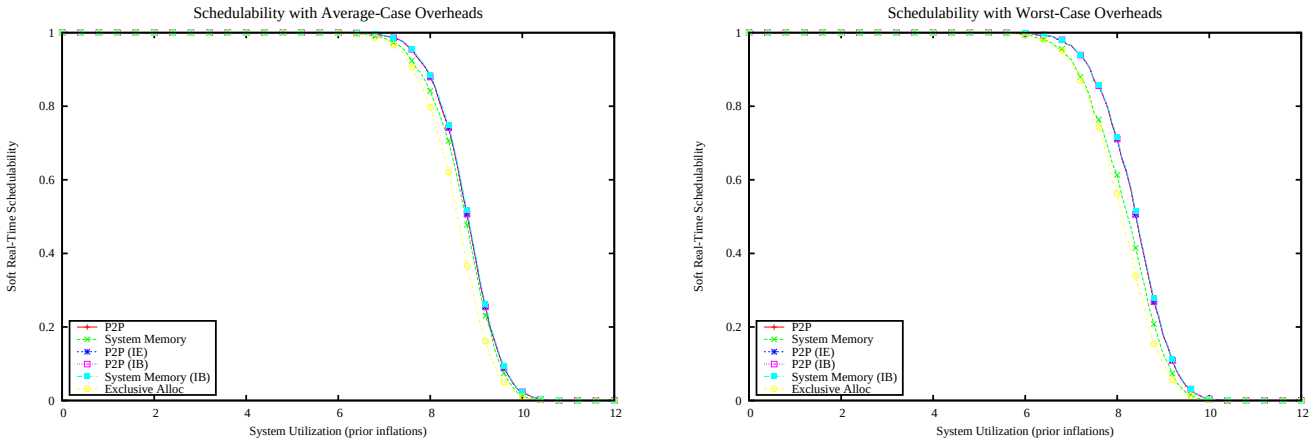

Figure 5267: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

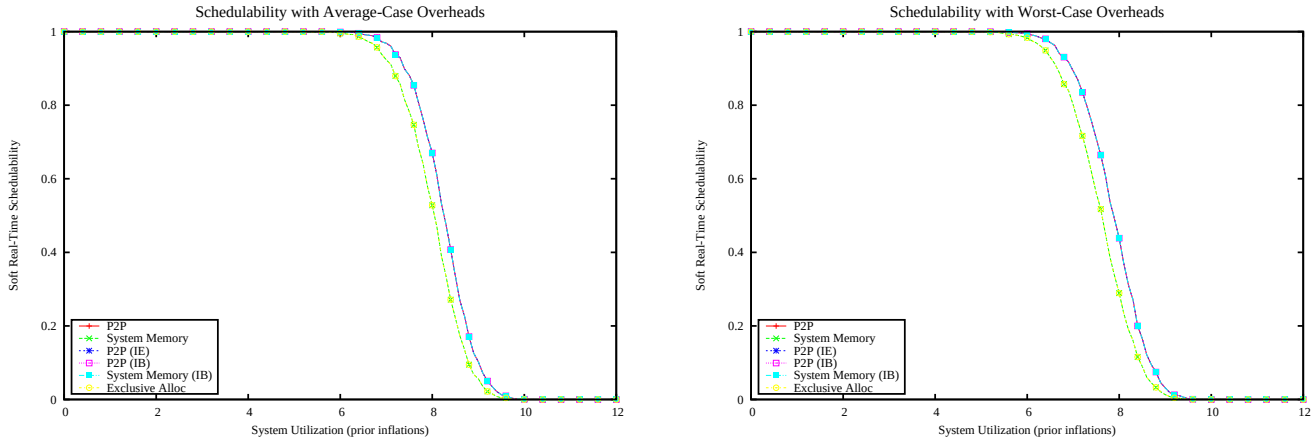

Figure 5268: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

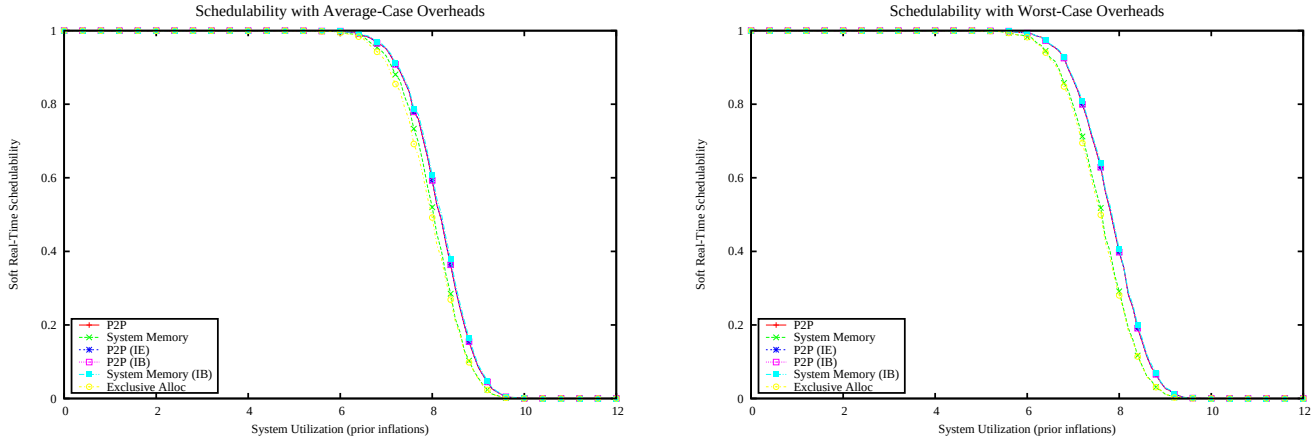

Figure 5269: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

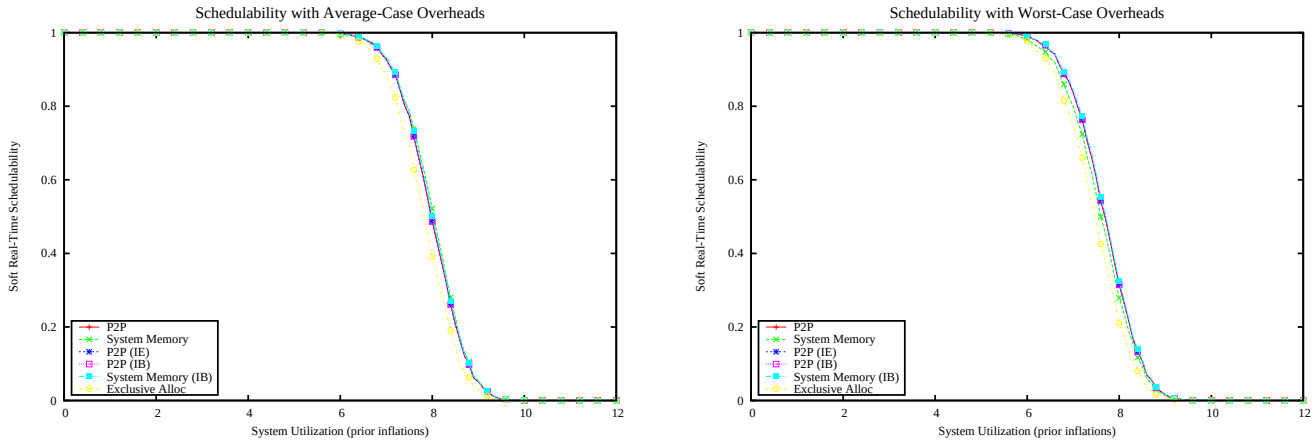

Figure 5270: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

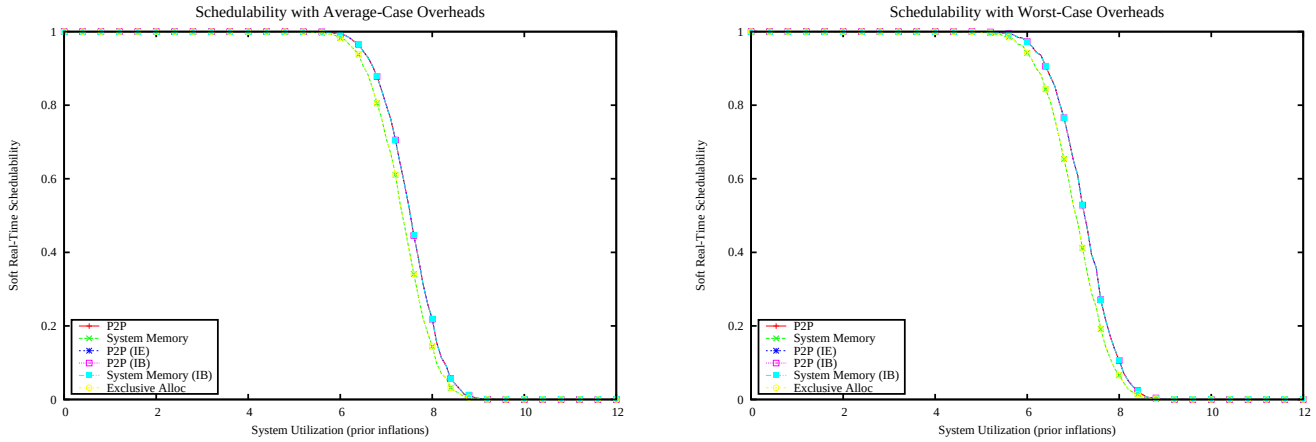

Figure 5271: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

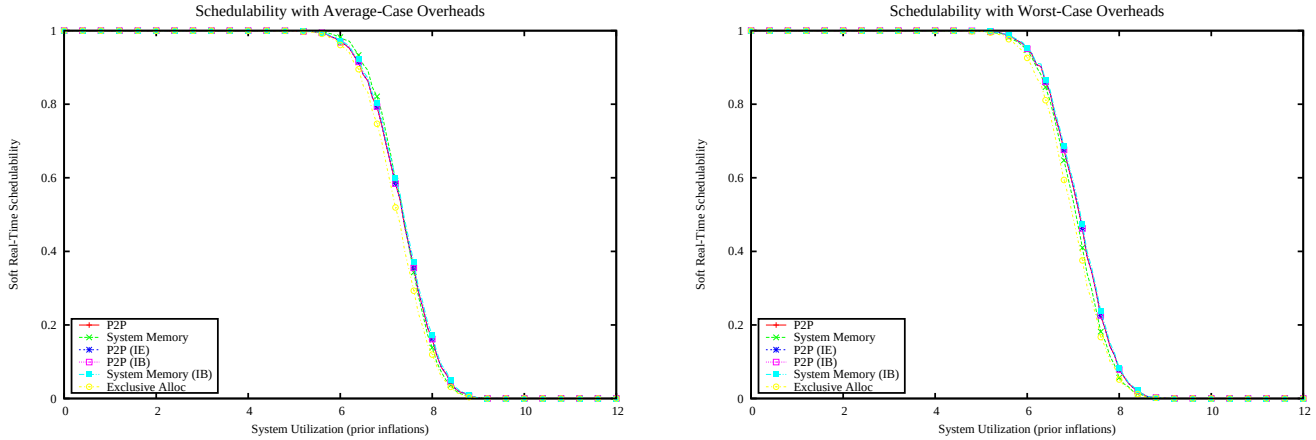

Figure 5272: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

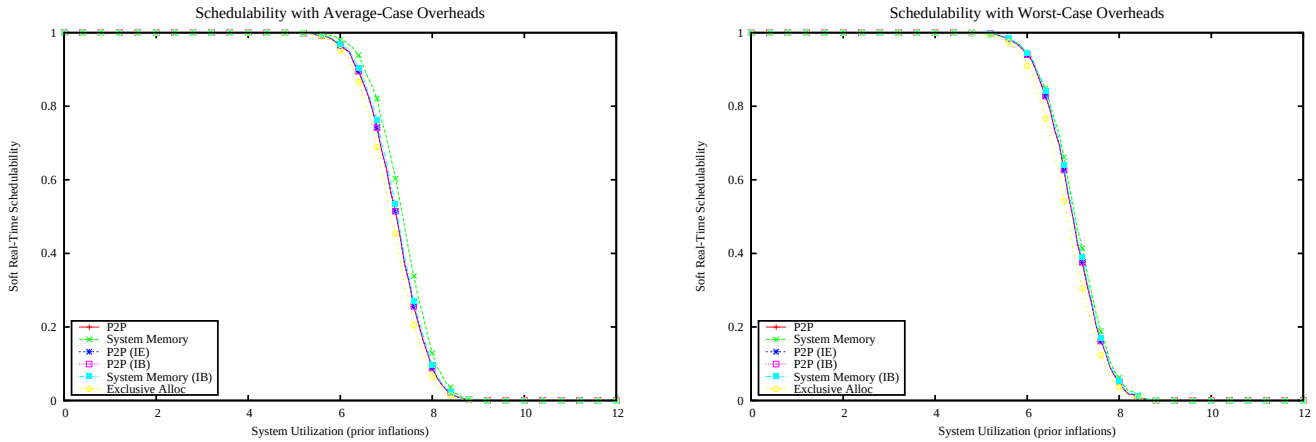

Figure 5273: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

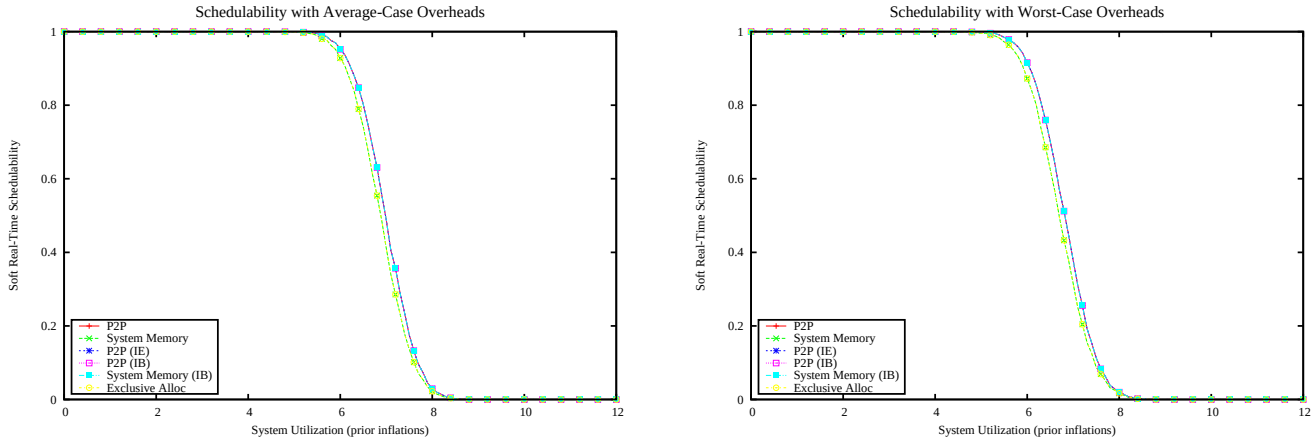

Figure 5274: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

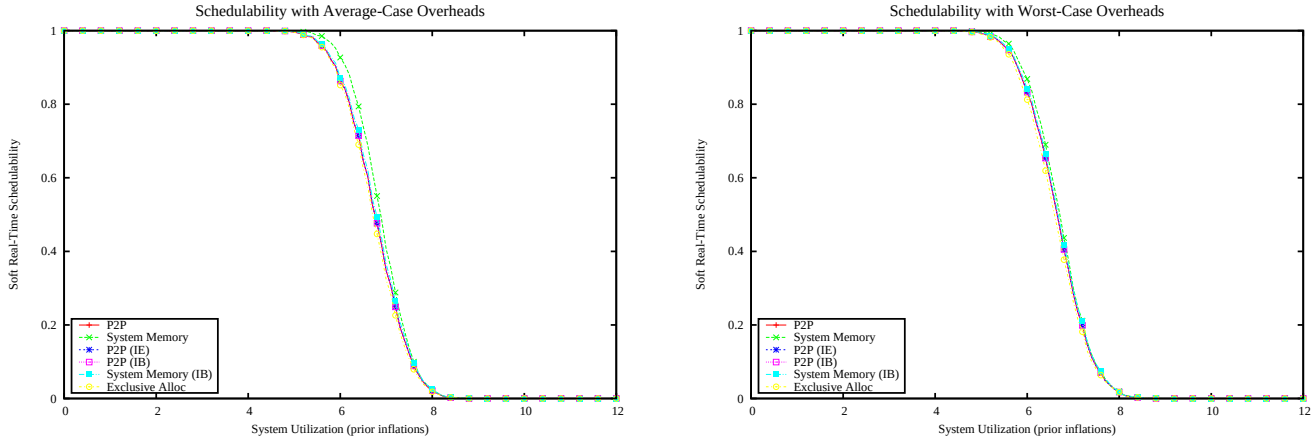

Figure 5275: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

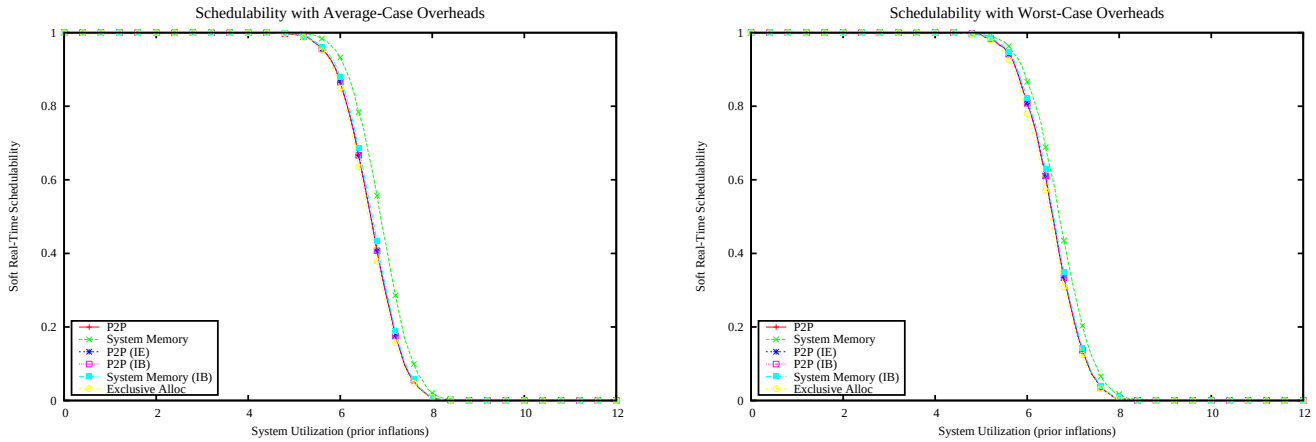

Figure 5276: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

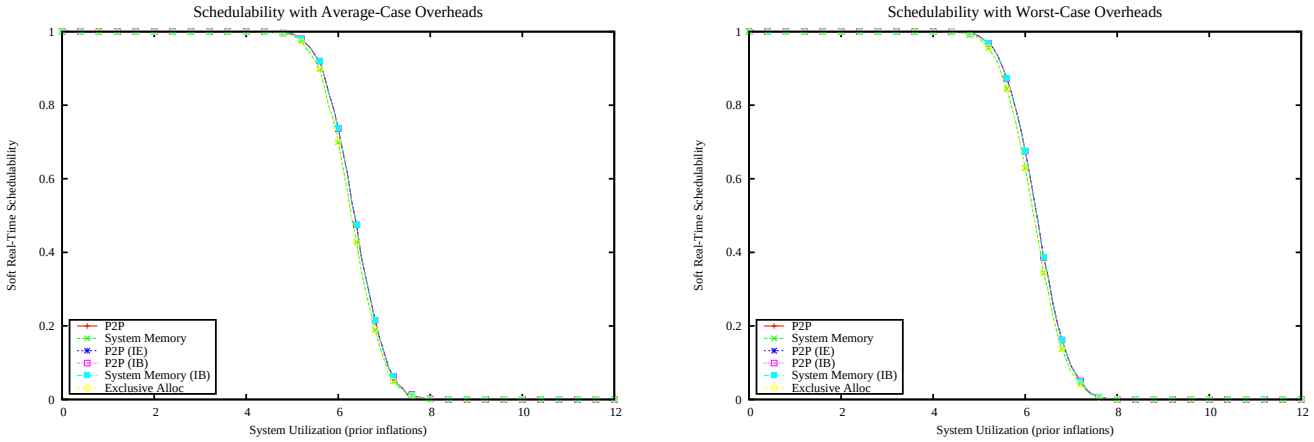

Figure 5277: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

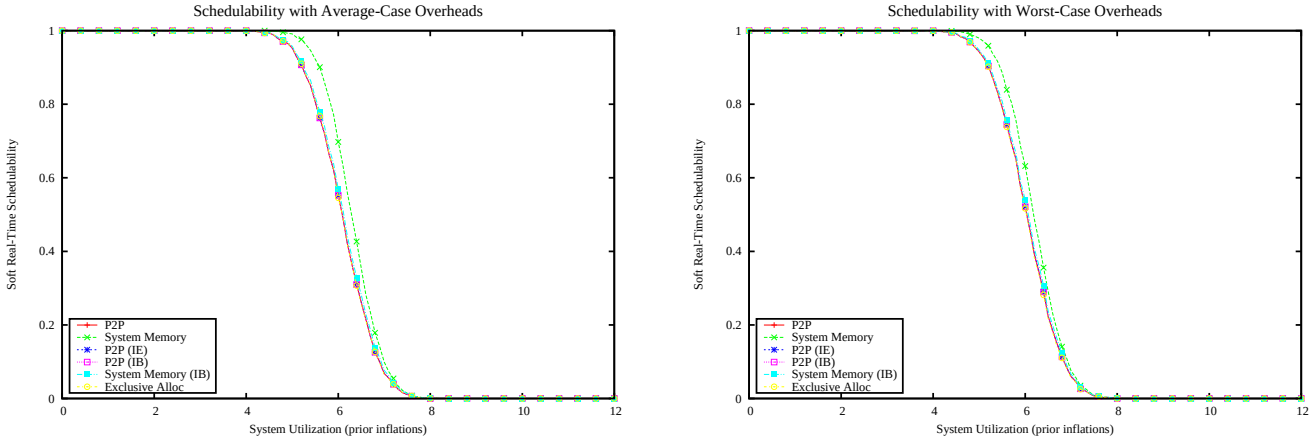

Figure 5278: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

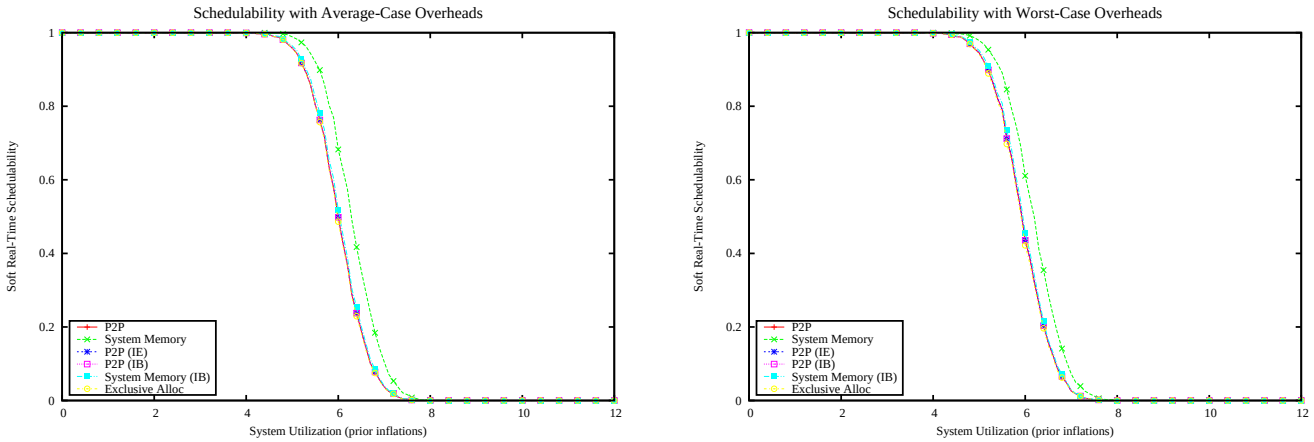

Figure 5279: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

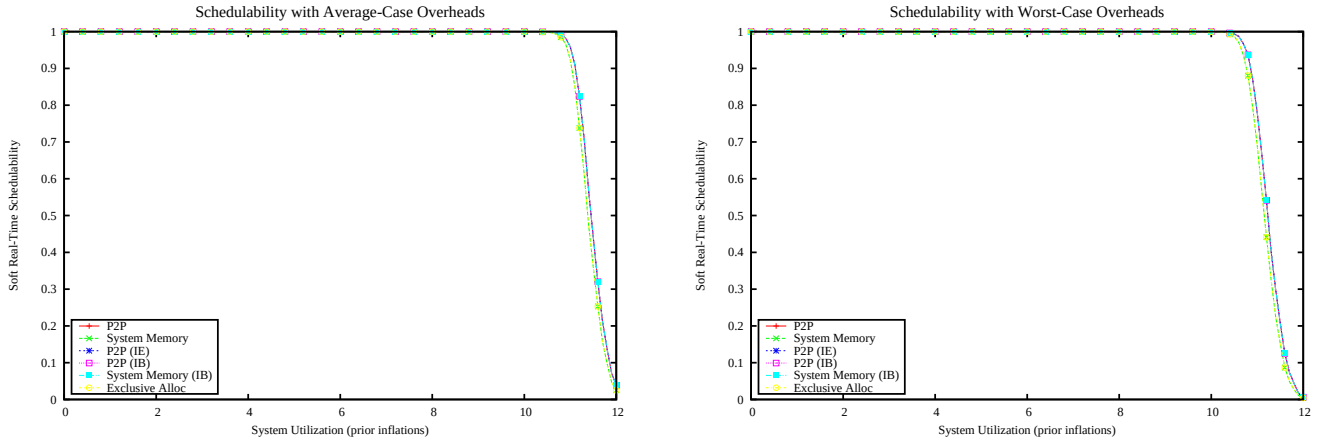

Figure 5280: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

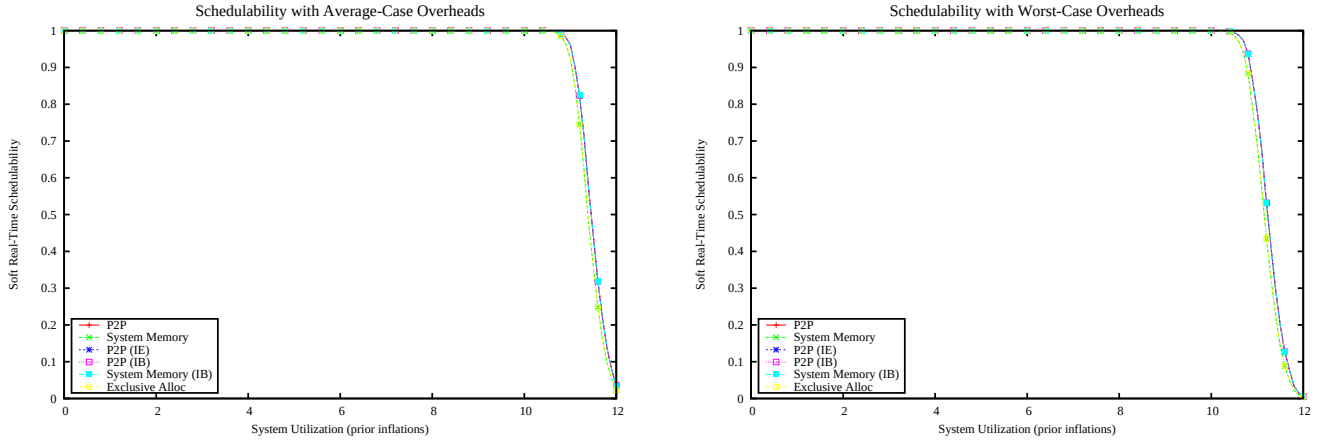

Figure 5281: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

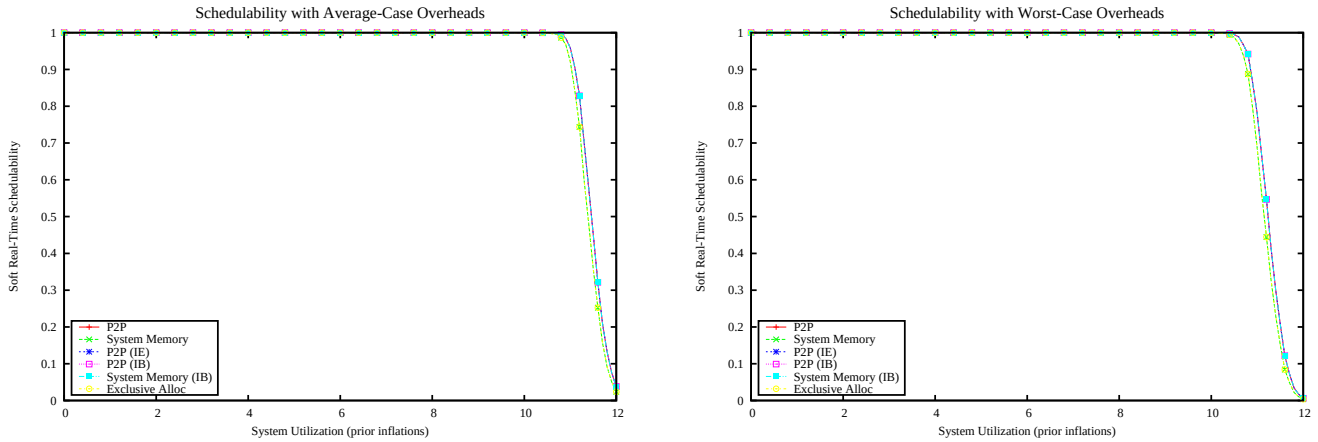

Figure 5282: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

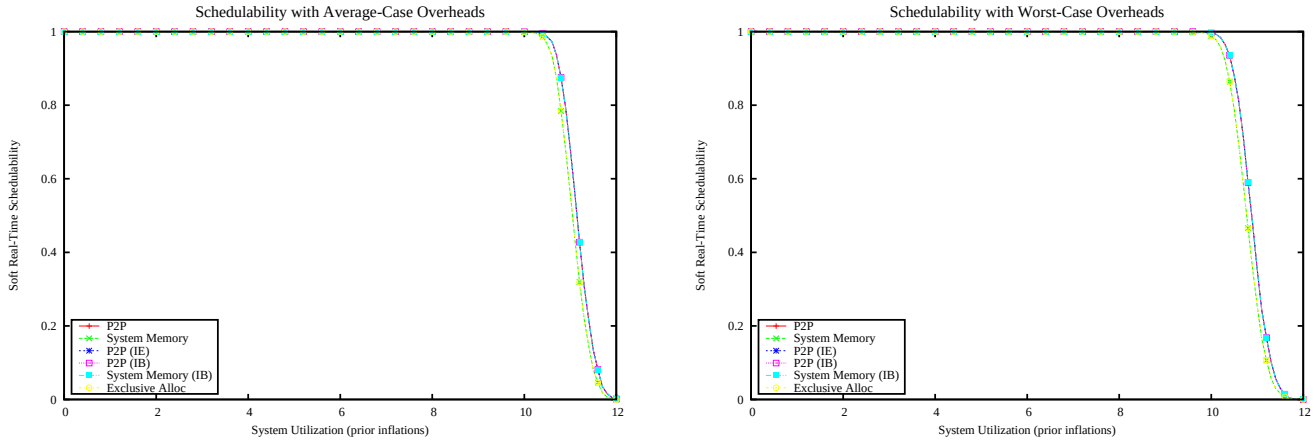

Figure 5283: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

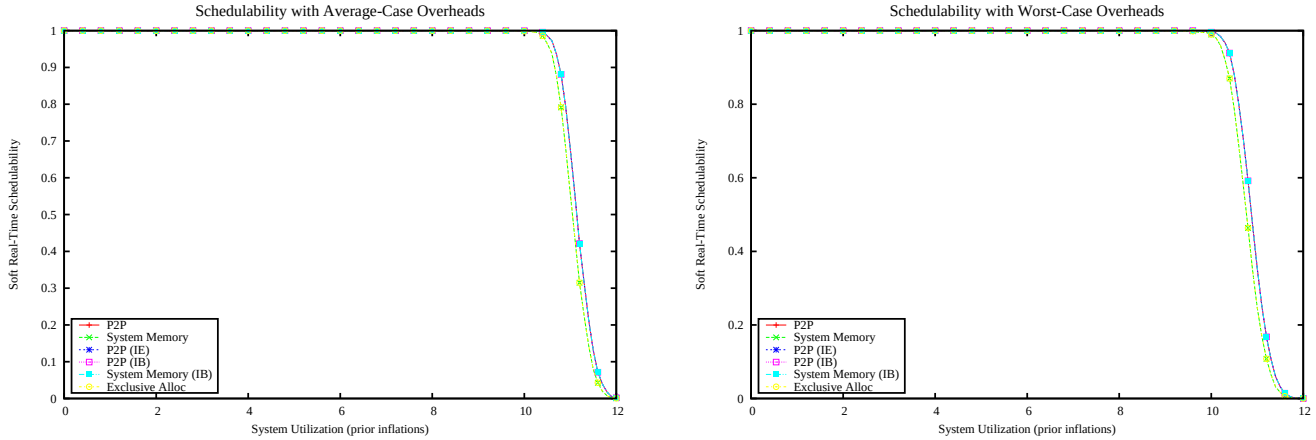

Figure 5284: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

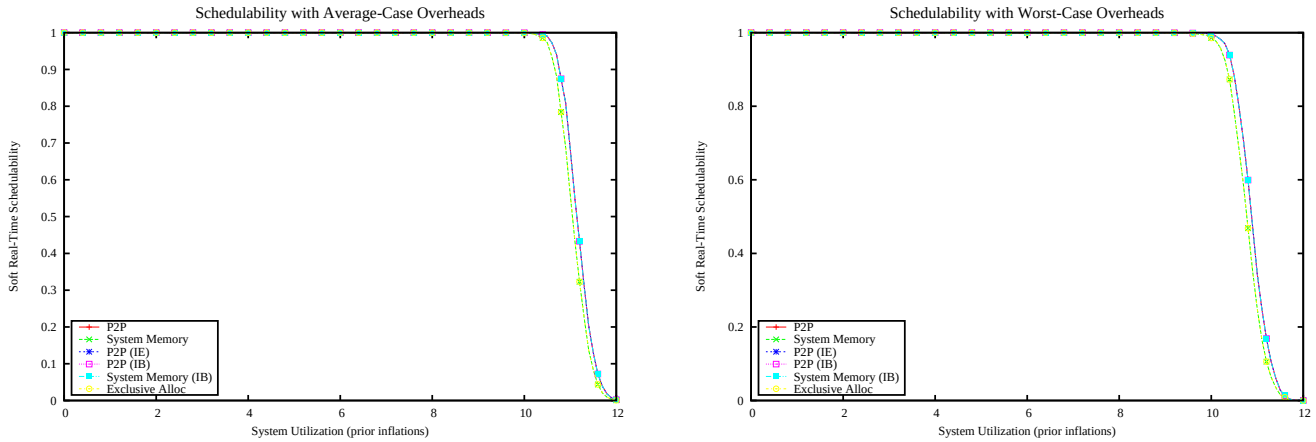

Figure 5285: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

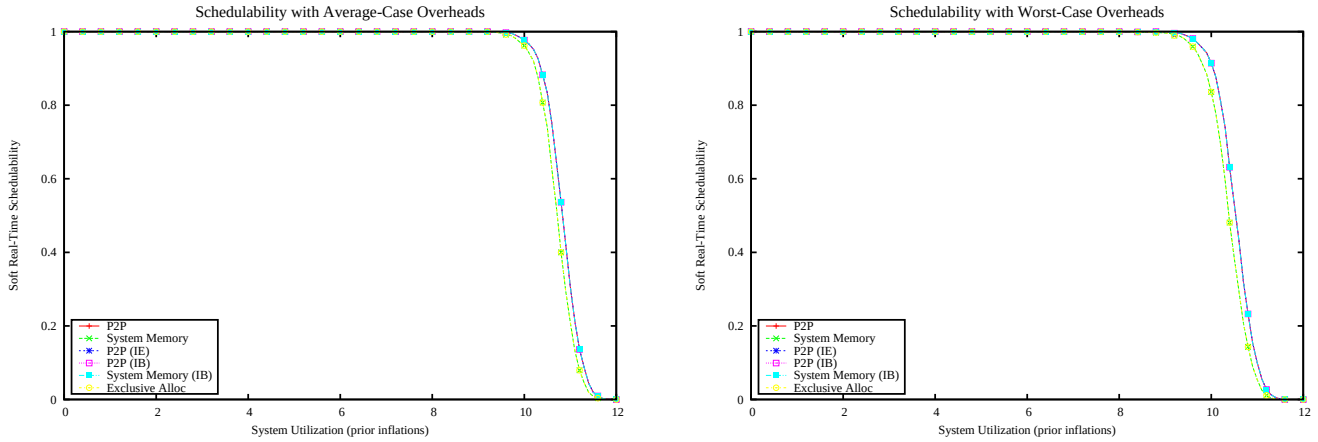

Figure 5286: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

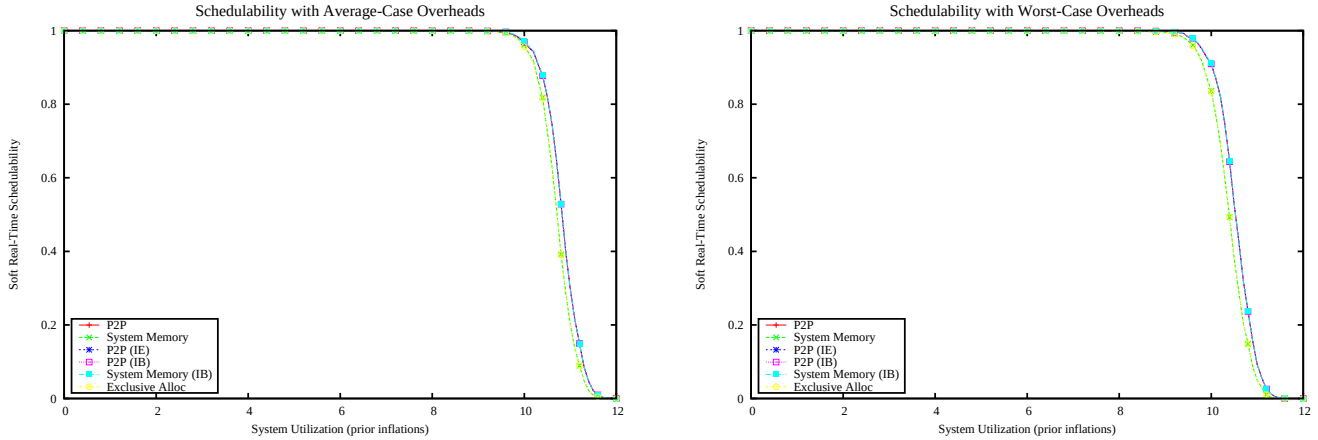

Figure 5287: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

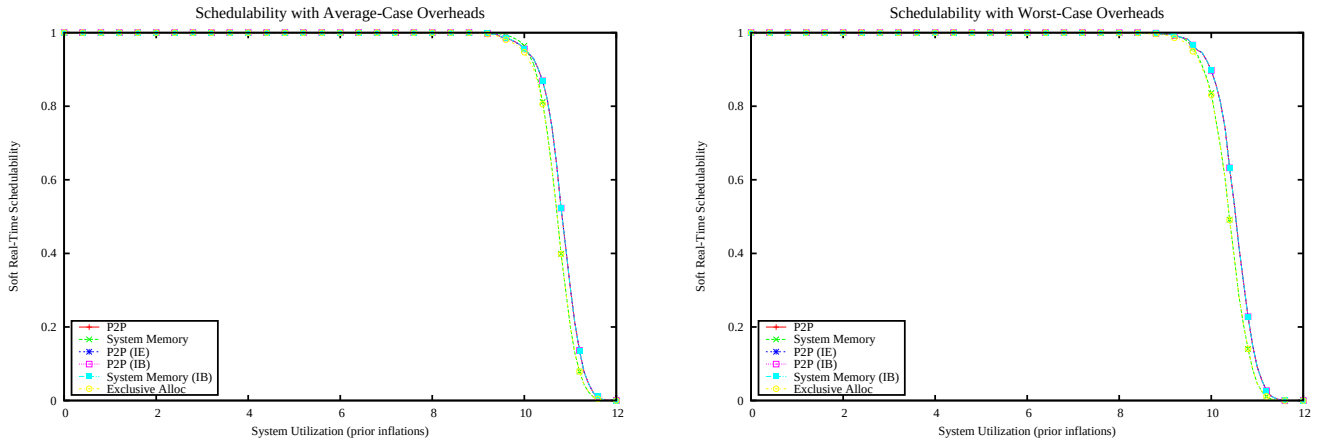

Figure 5288: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

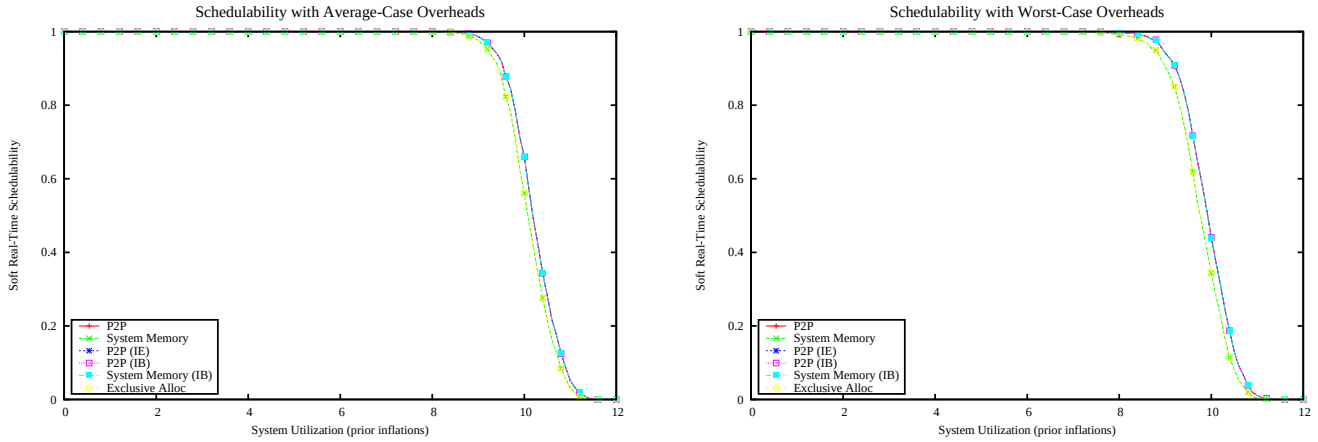

Figure 5289: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

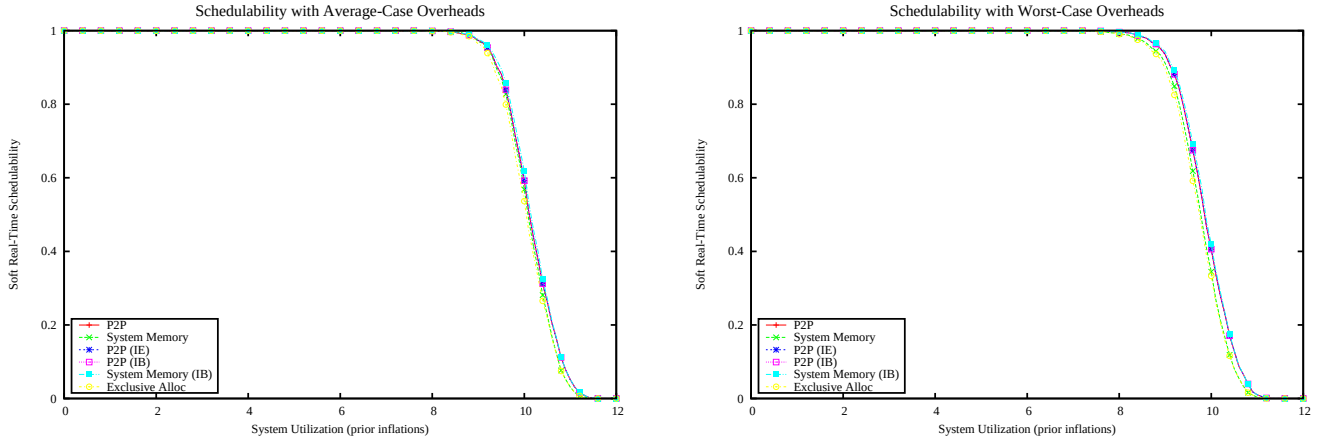

Figure 5290: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

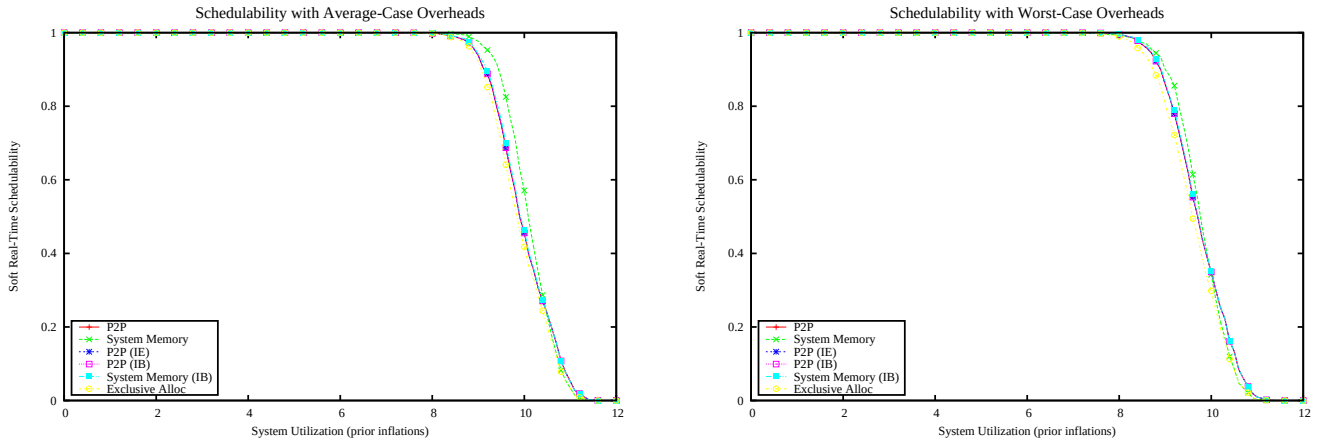

Figure 5291: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

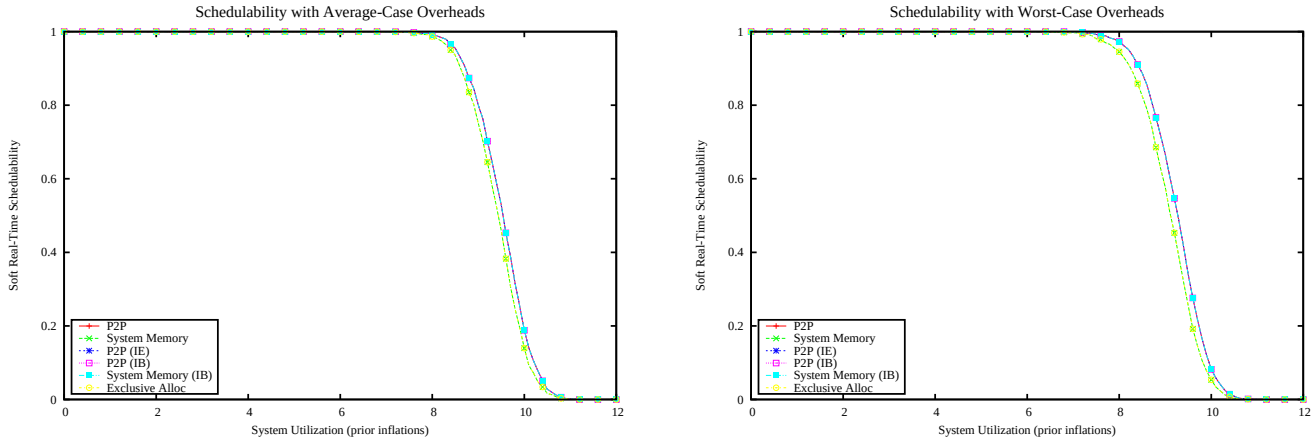

Figure 5292: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

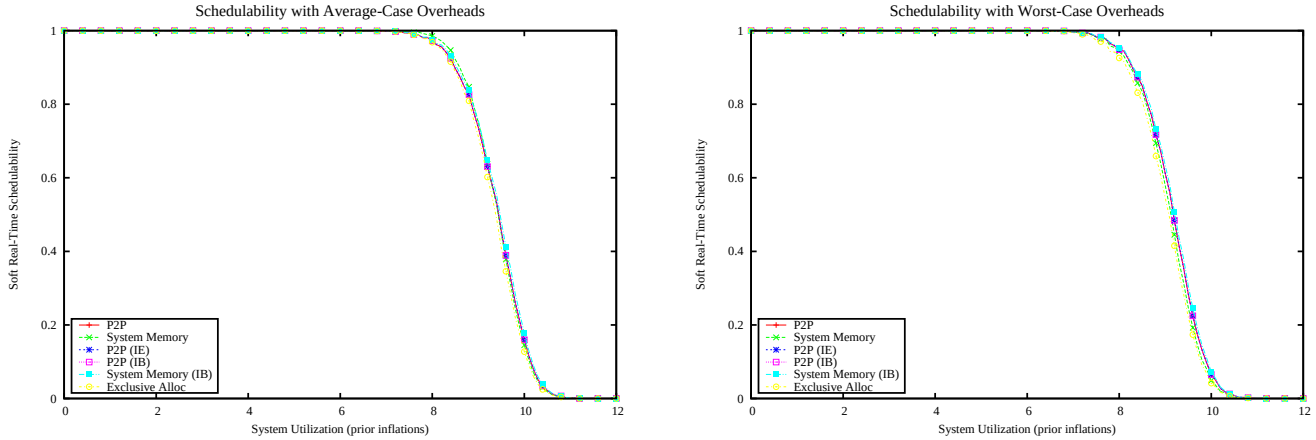

Figure 5293: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

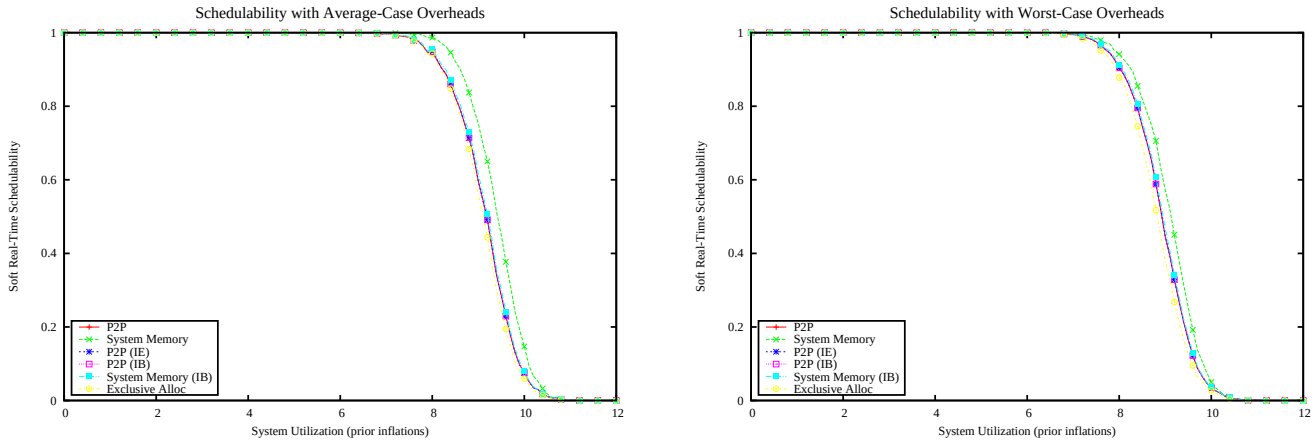

Figure 5294: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

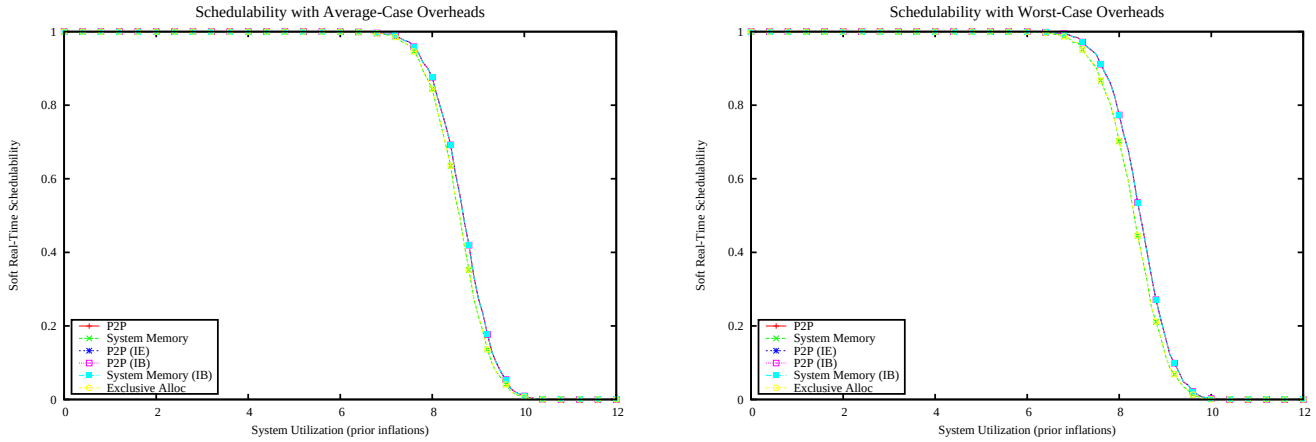

Figure 5295: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

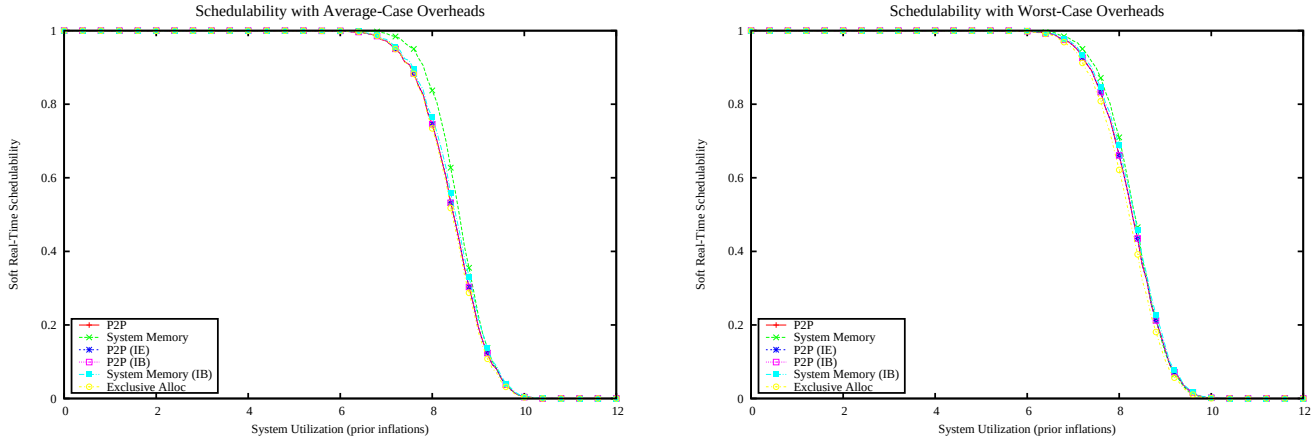

Figure 5296: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

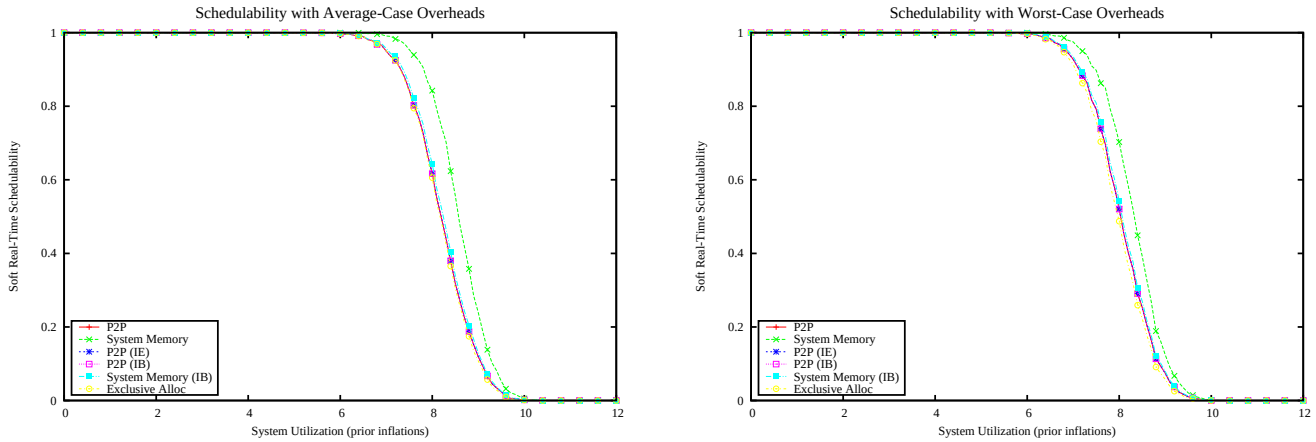

Figure 5297: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

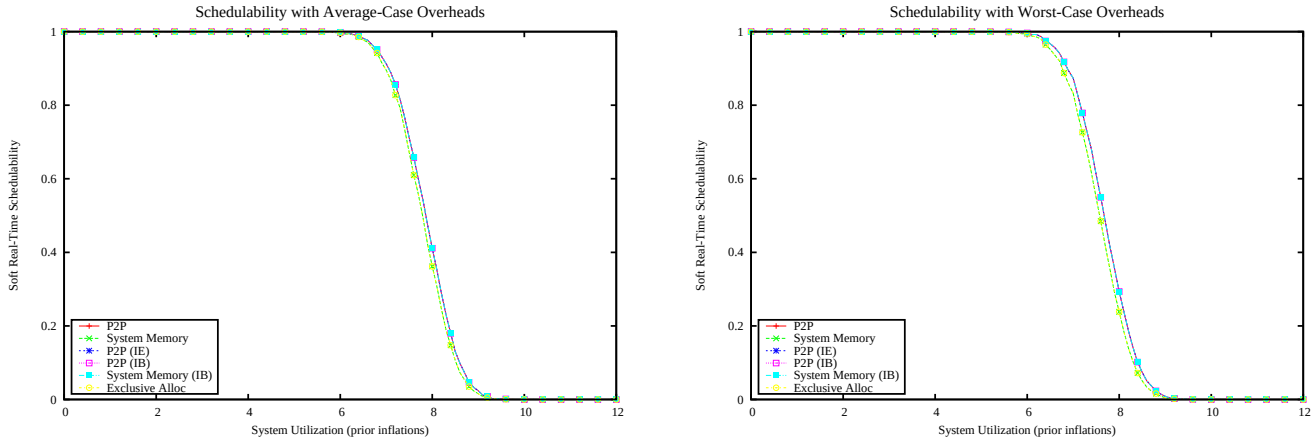

Figure 5298: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

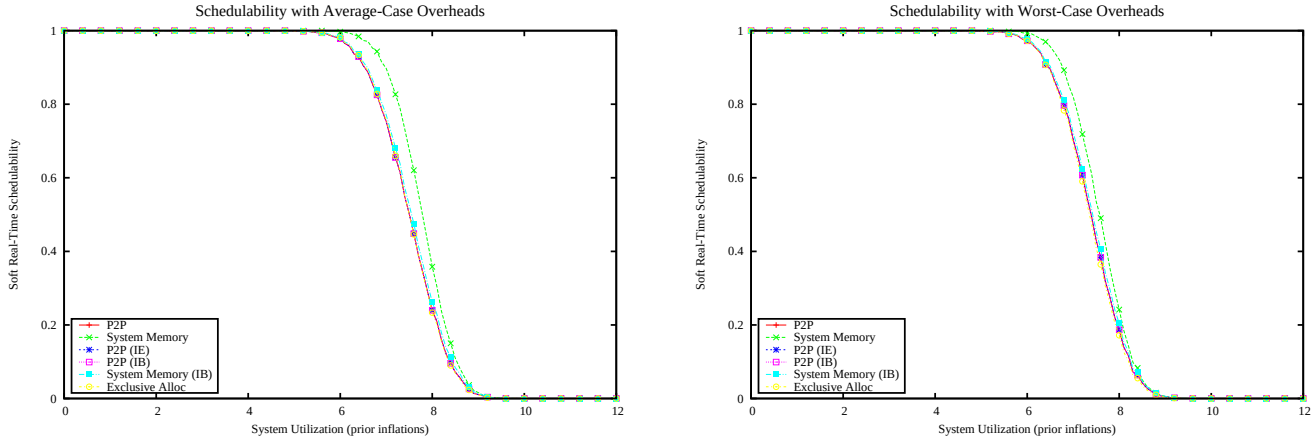

Figure 5299: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

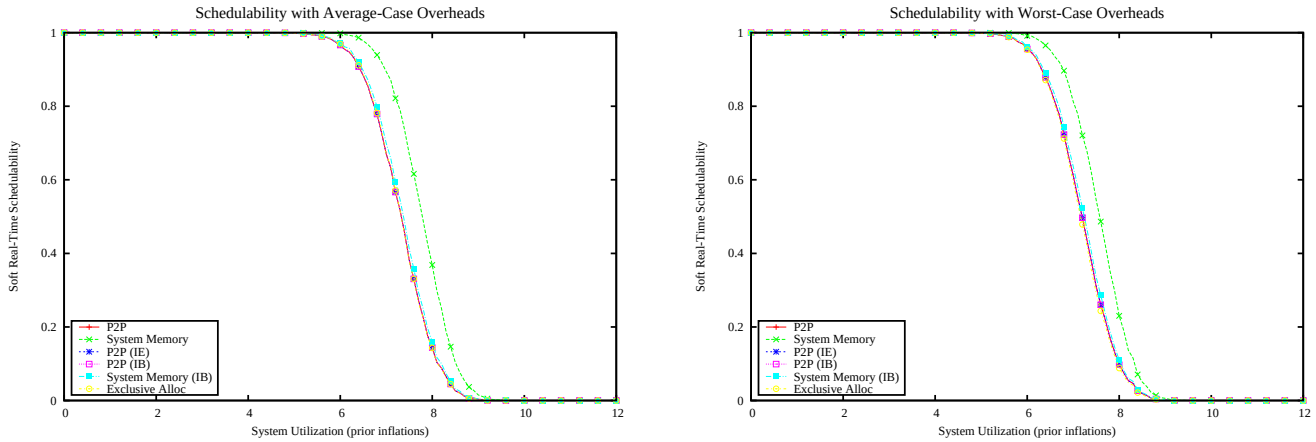

Figure 5300: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

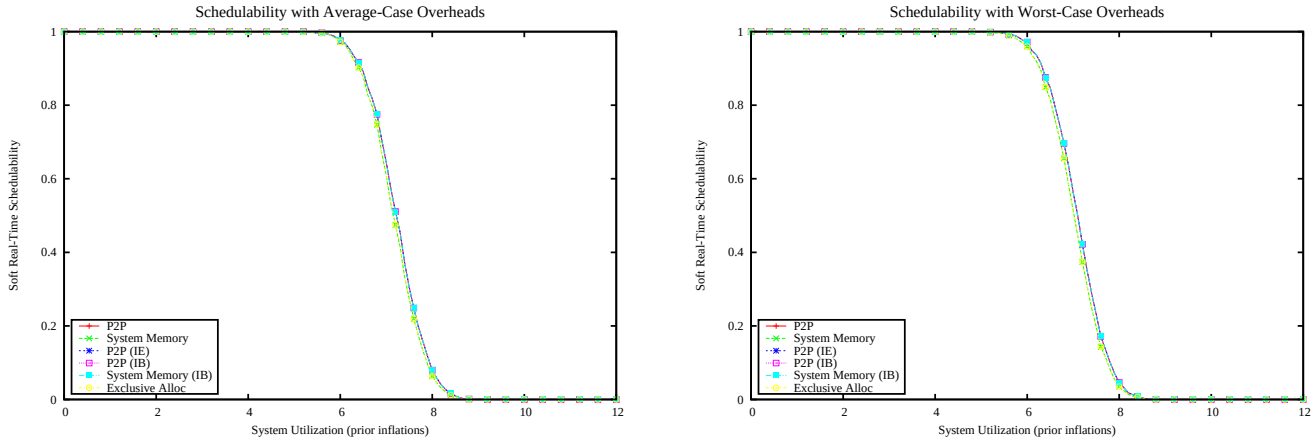

Figure 5301: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

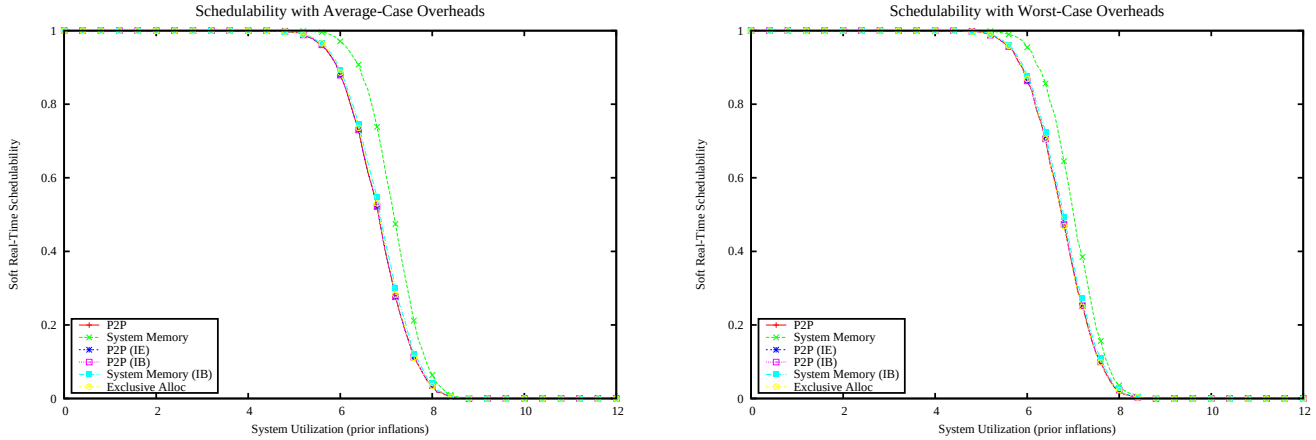

Figure 5302: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

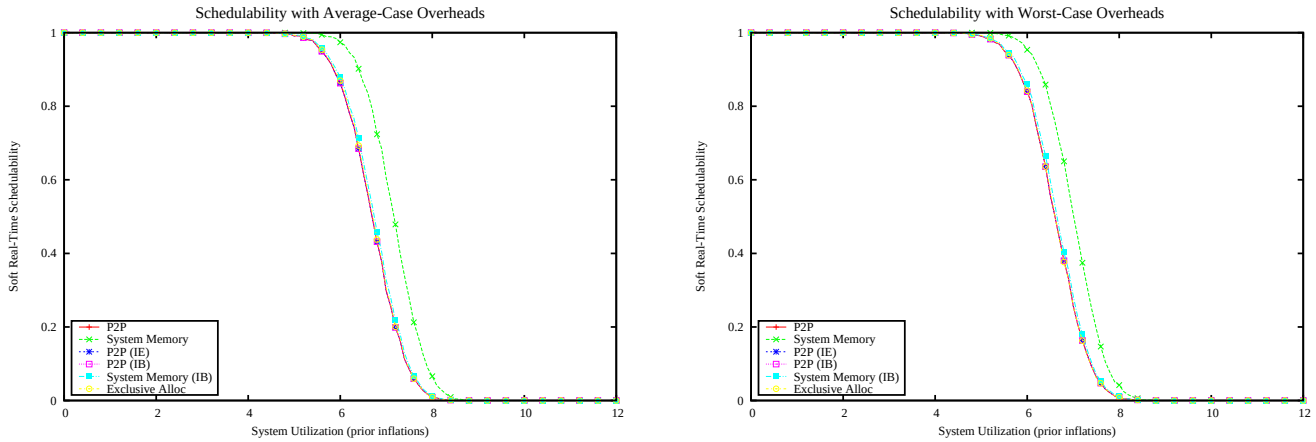

Figure 5303: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

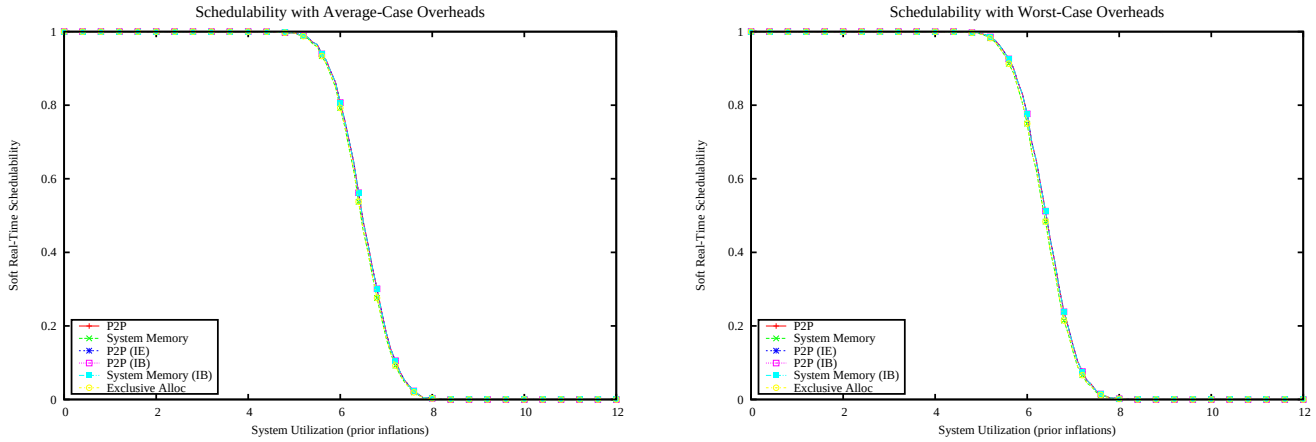

Figure 5304: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

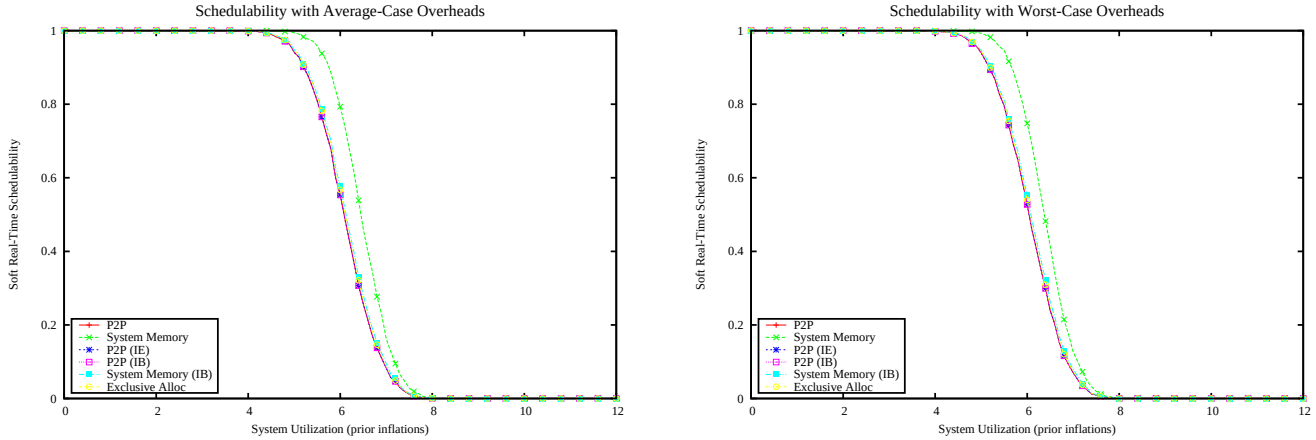

Figure 5305: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

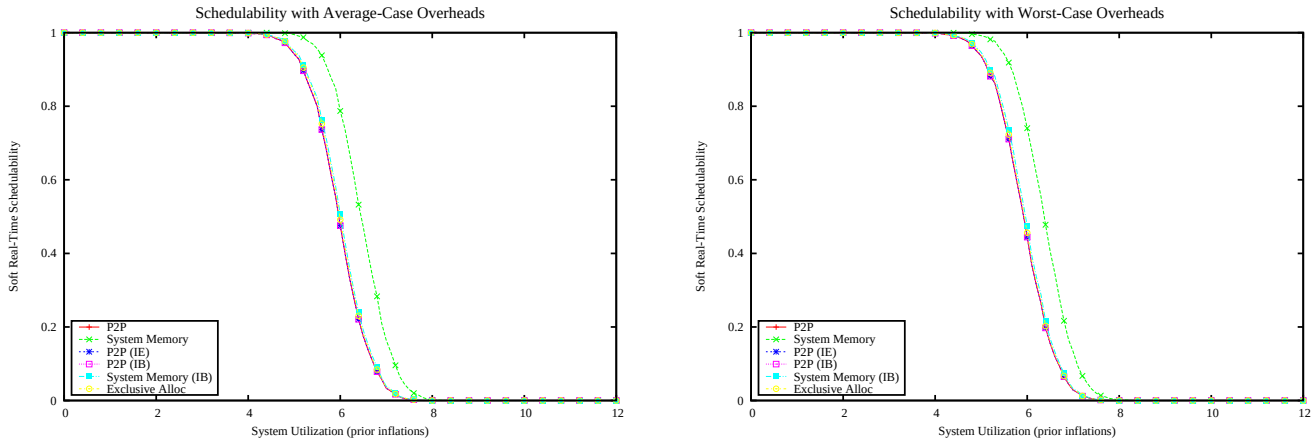

Figure 5306: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

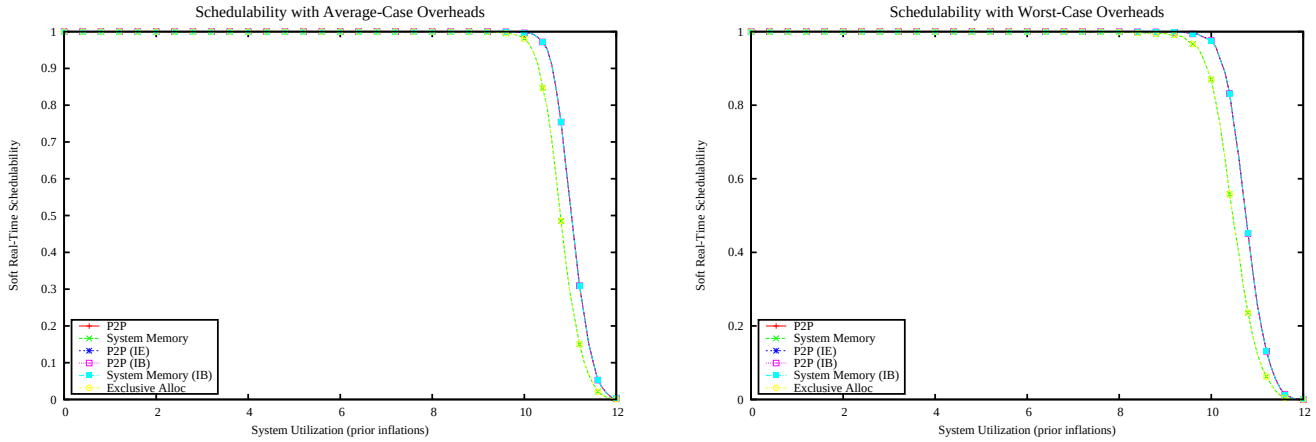

Figure 5307: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

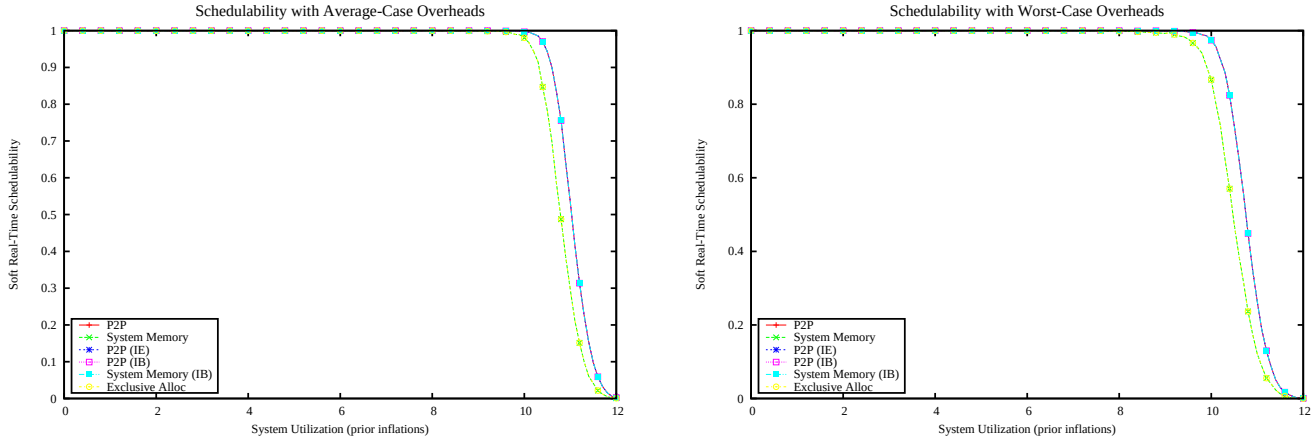

Figure 5308: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

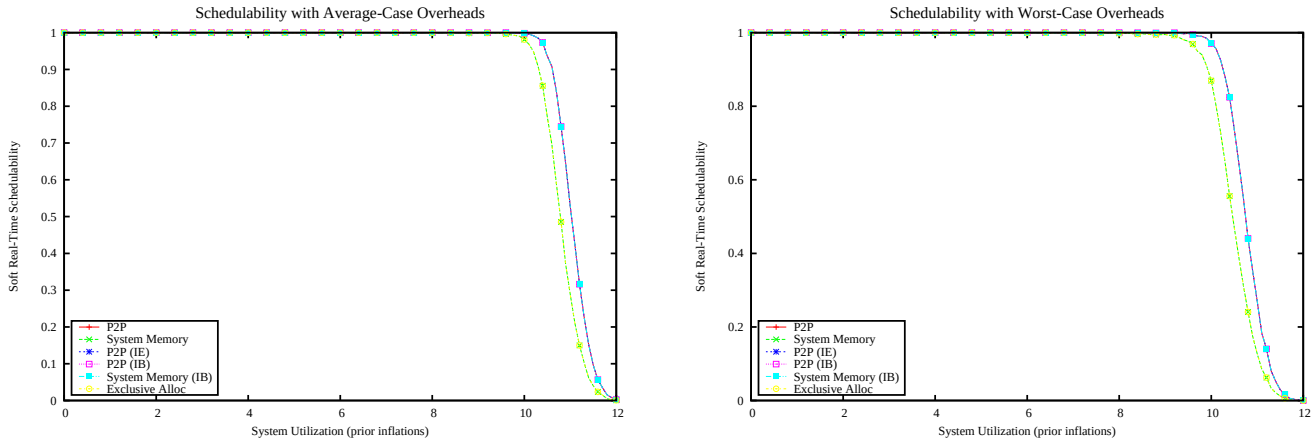

Figure 5309: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

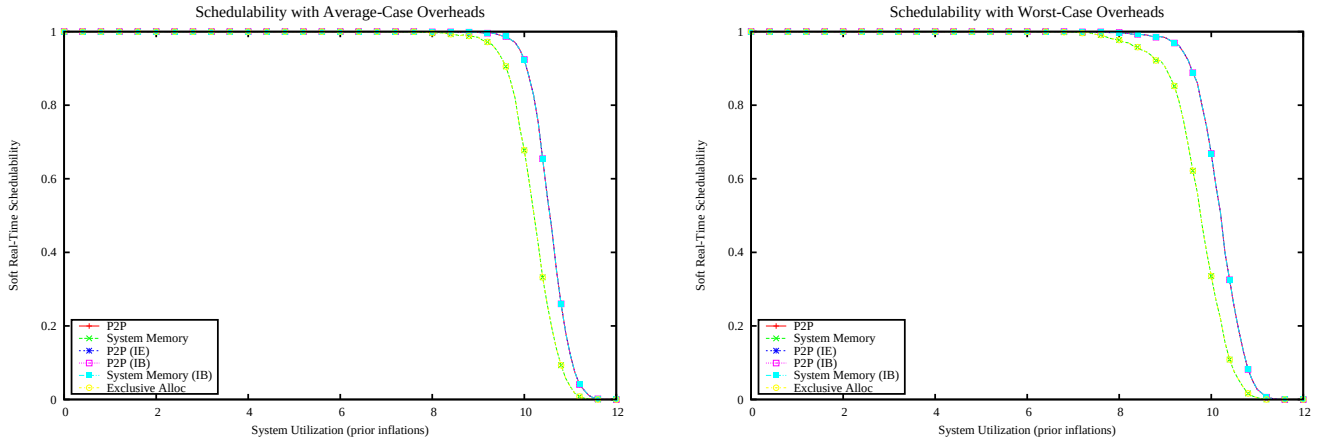

Figure 5310: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

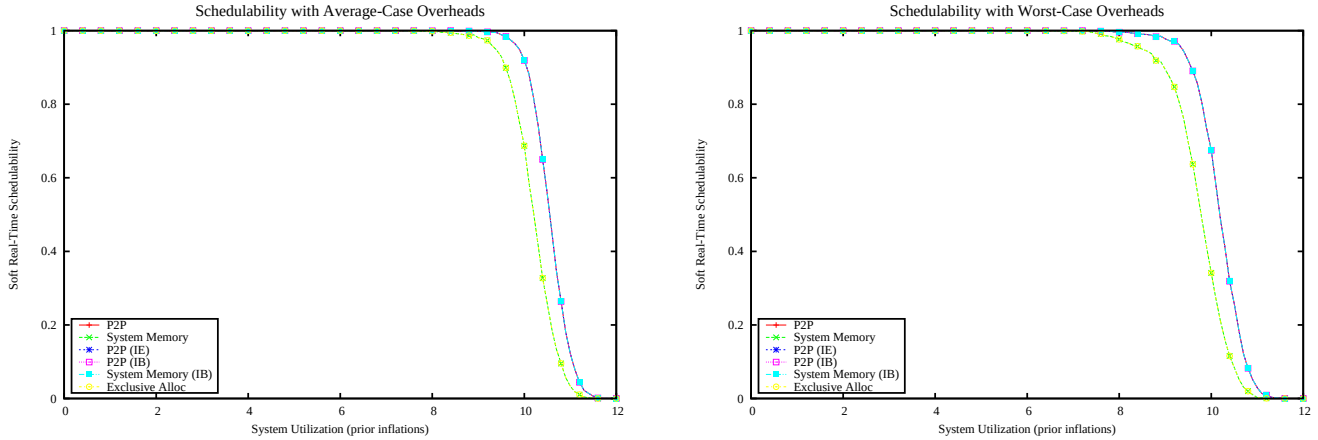

Figure 5311: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

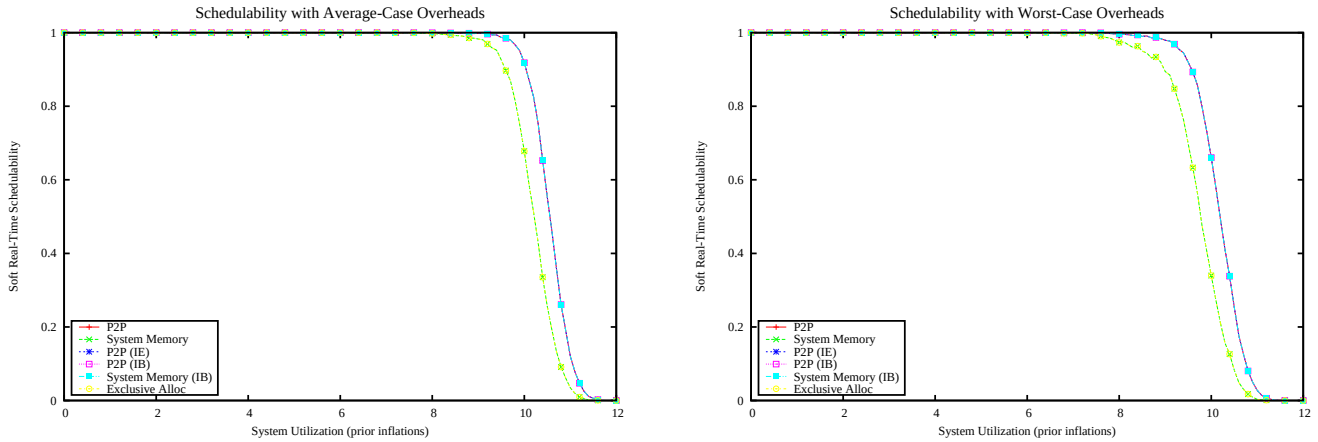

Figure 5312: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

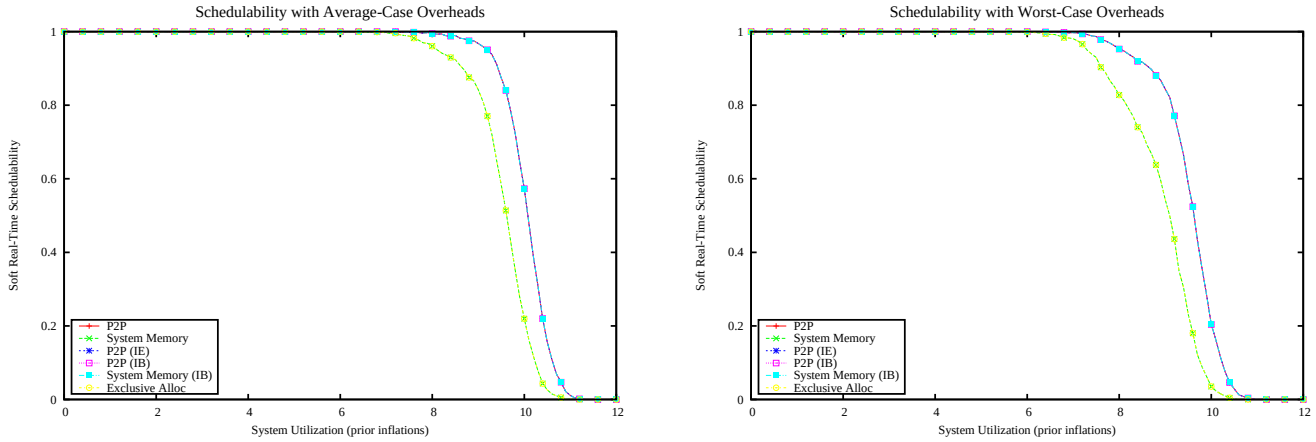

Figure 5313: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

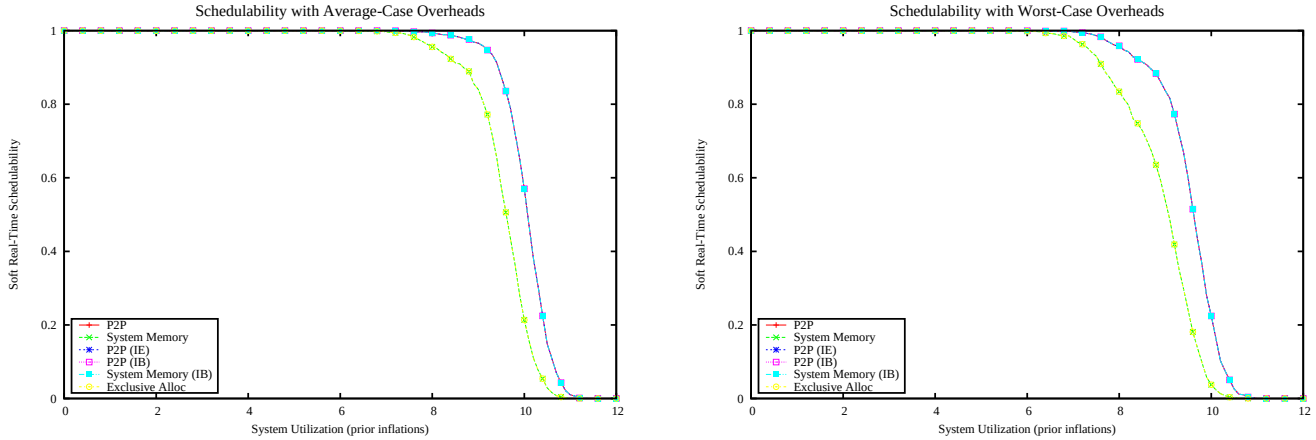

Figure 5314: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

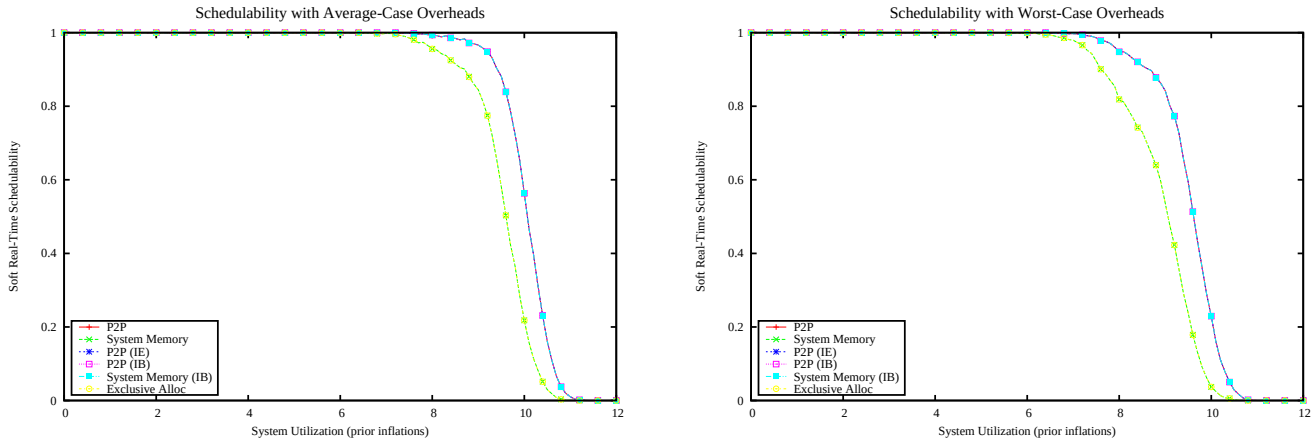

Figure 5315: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

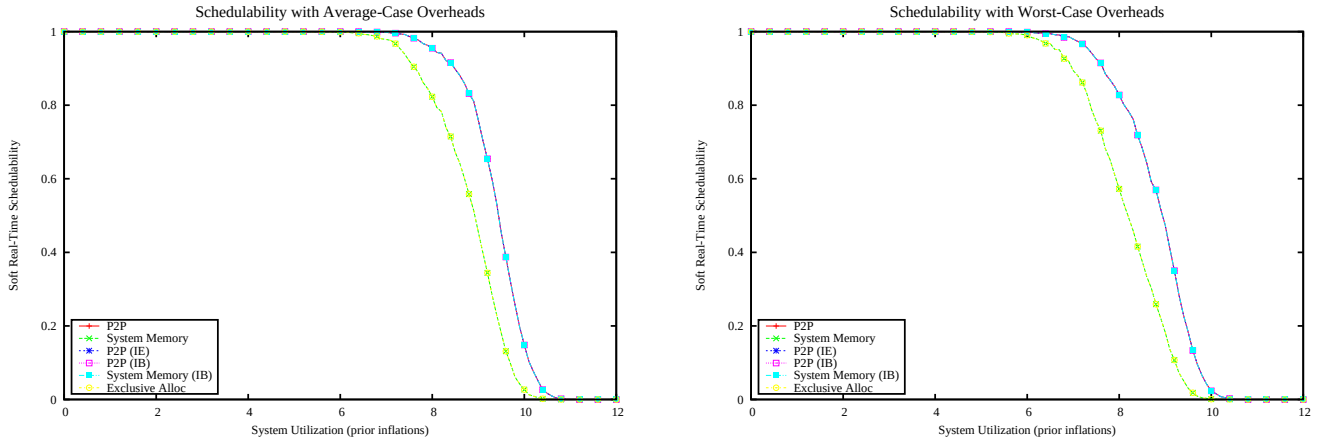

Figure 5316: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

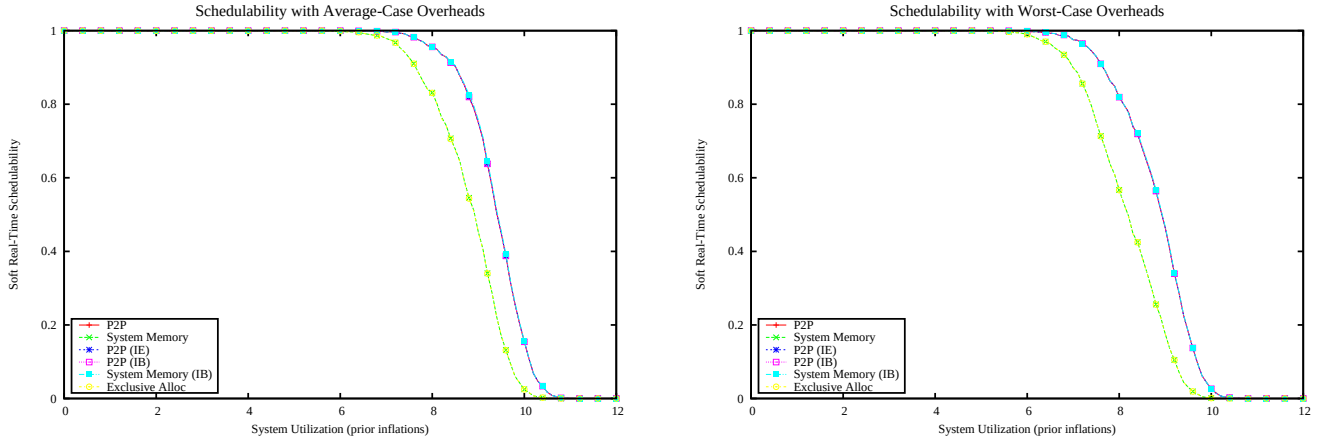

Figure 5317: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

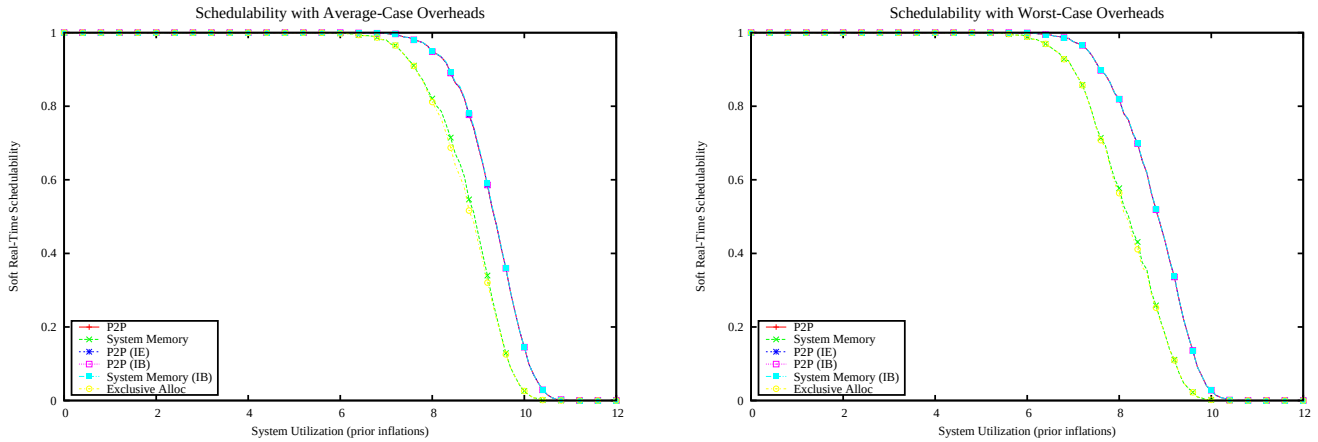

Figure 5318: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

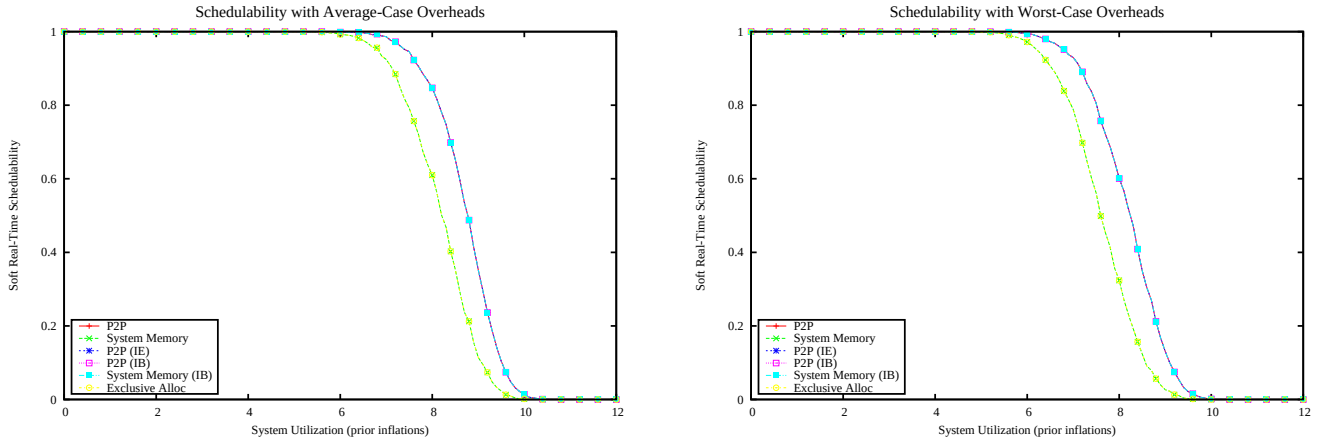

Figure 5319: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

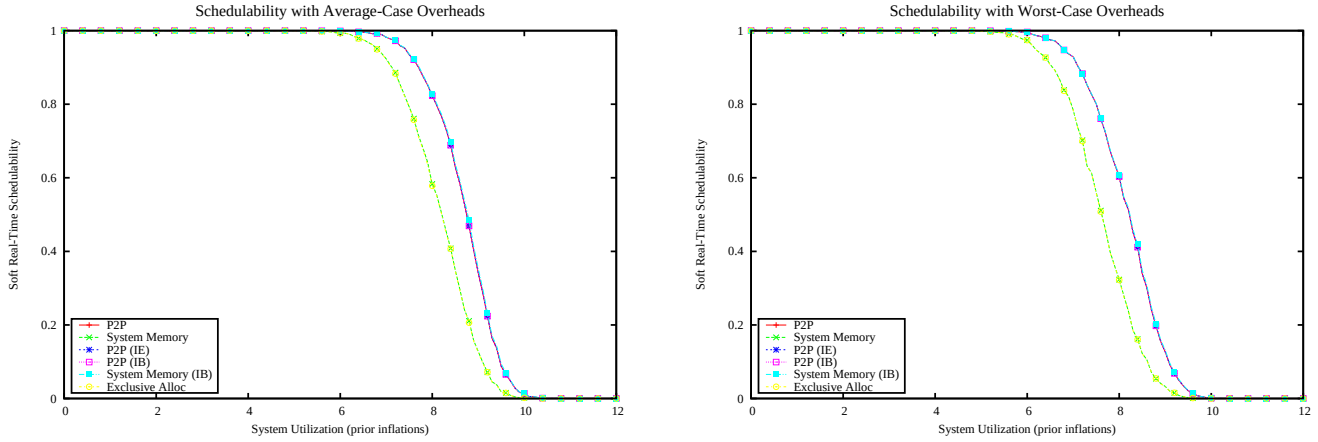

Figure 5320: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

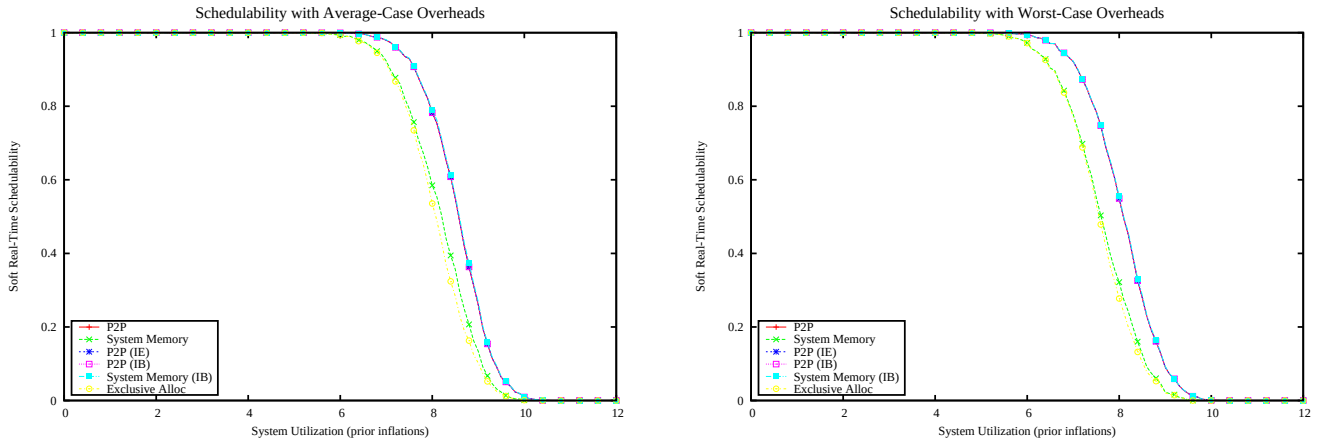

Figure 5321: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

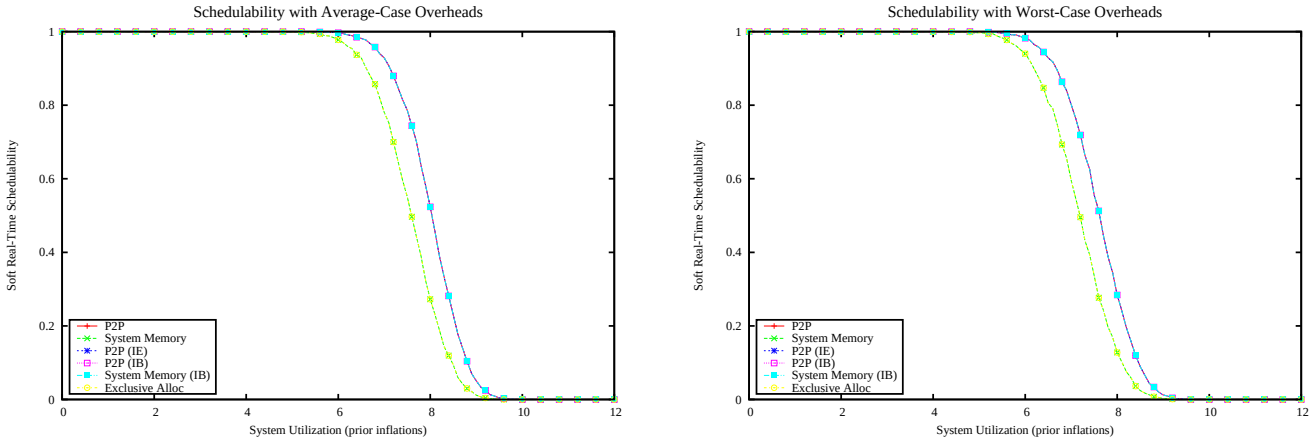

Figure 5322: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

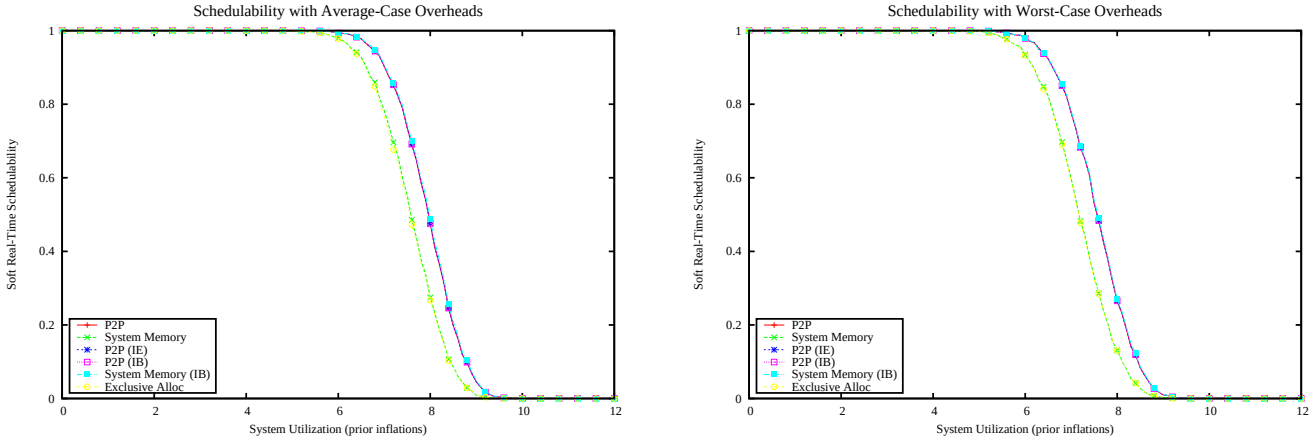

Figure 5323: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

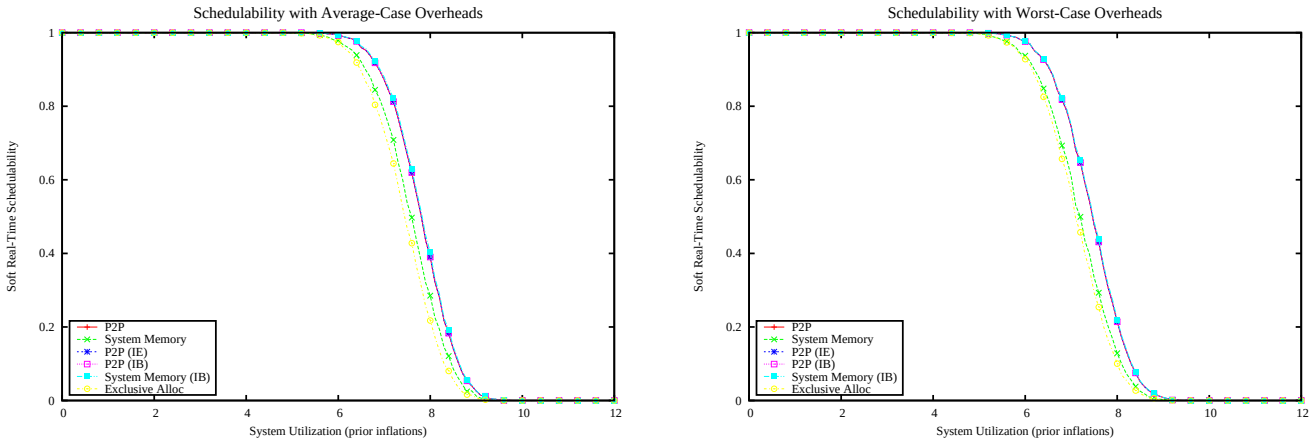

Figure 5324: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

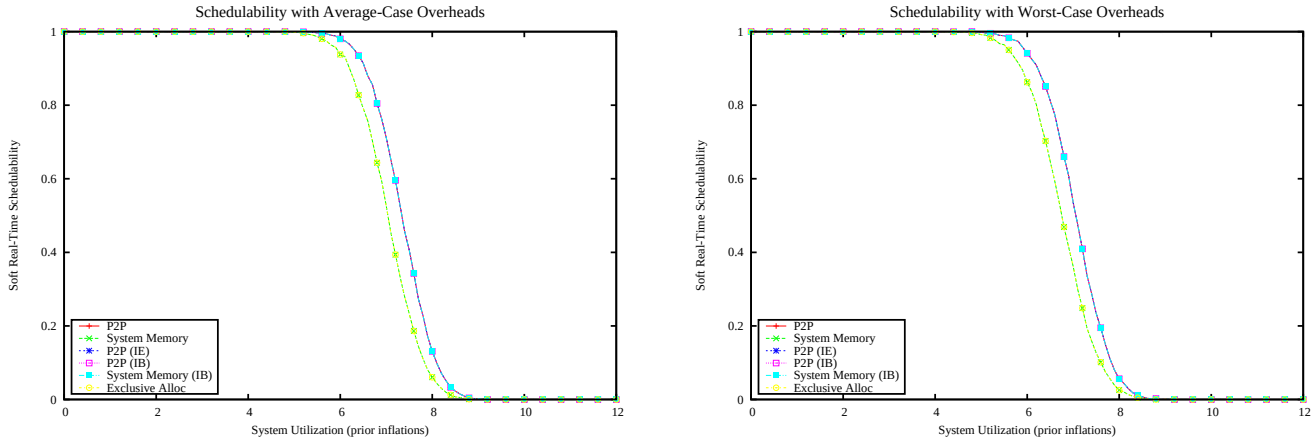

Figure 5325: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

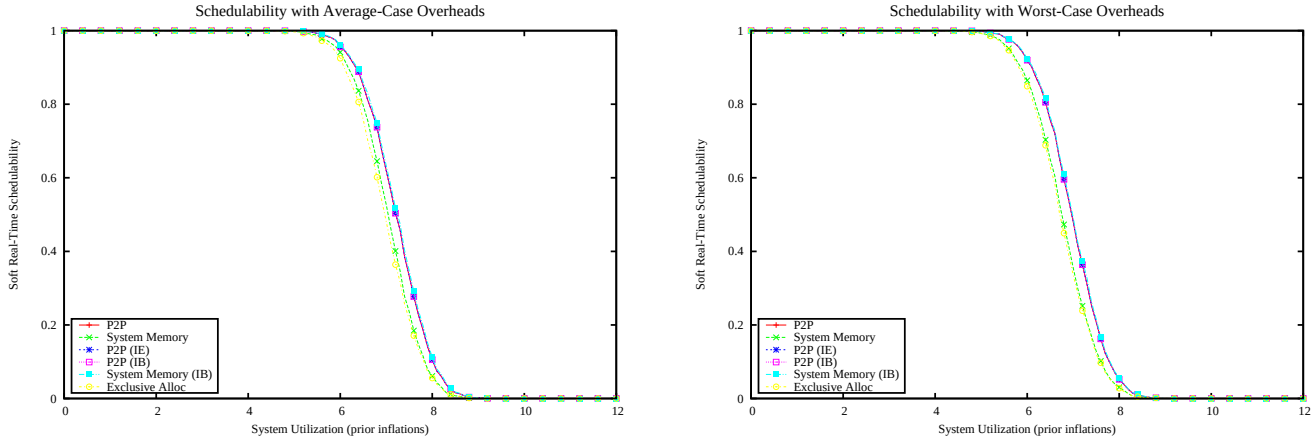

Figure 5326: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

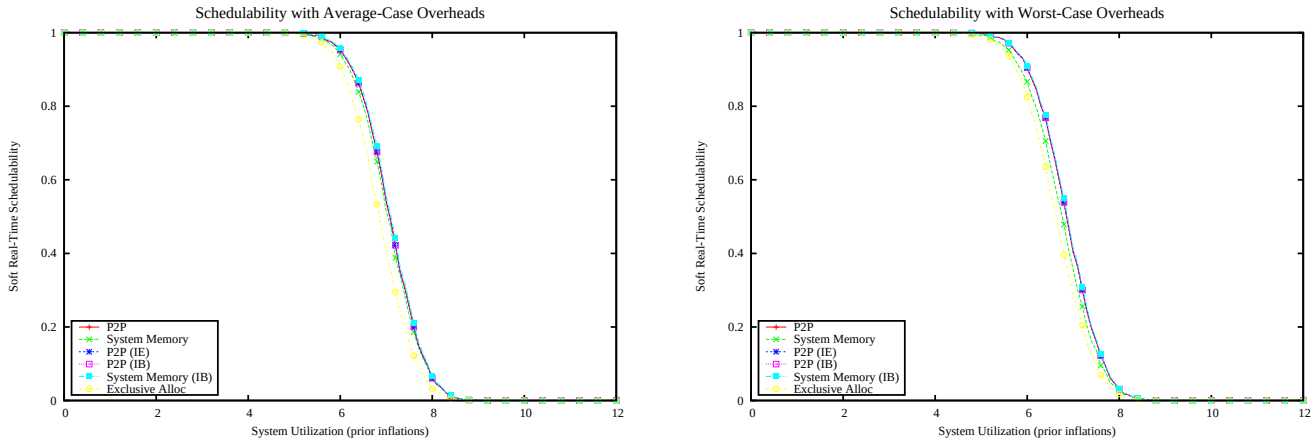

Figure 5327: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

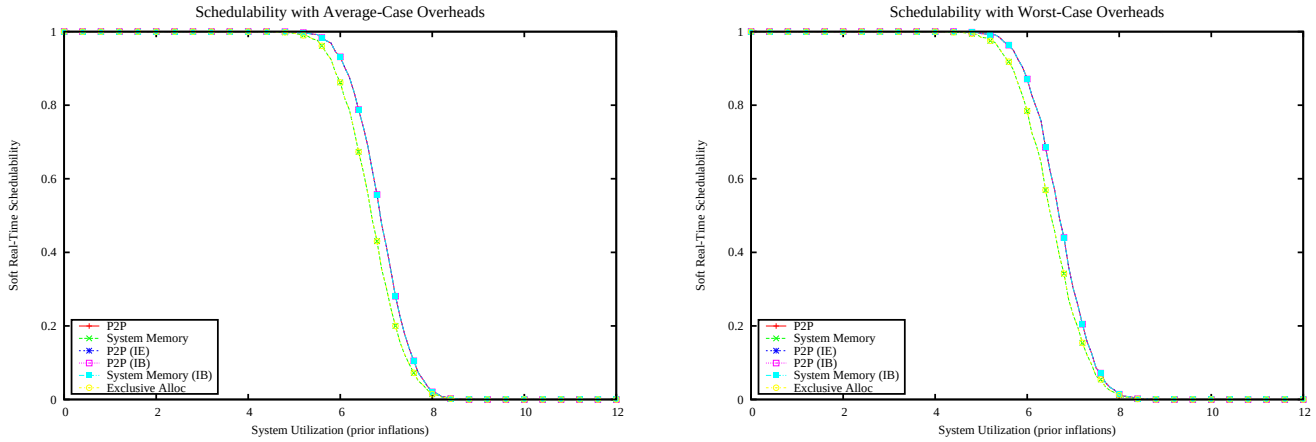

Figure 5328: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

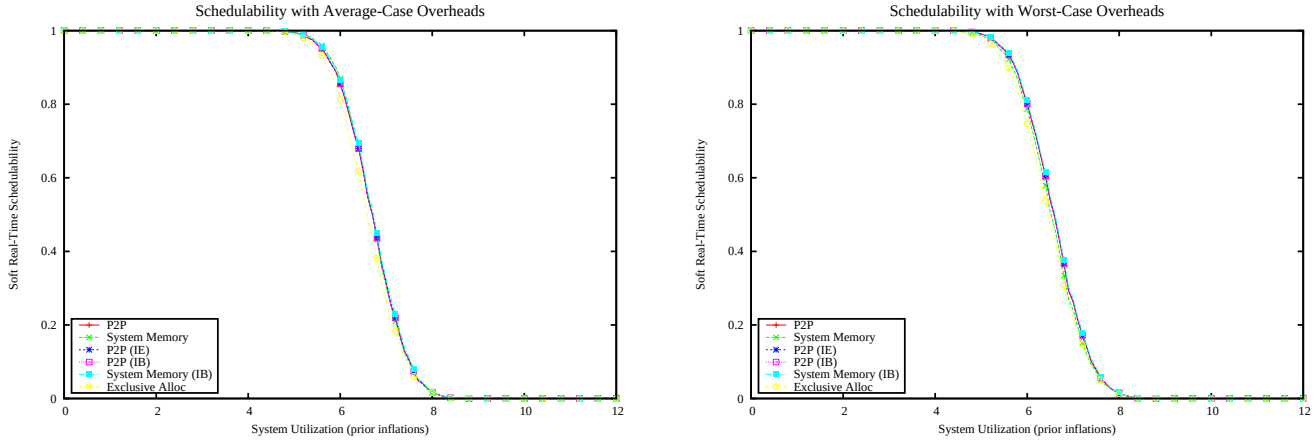

Figure 5329: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

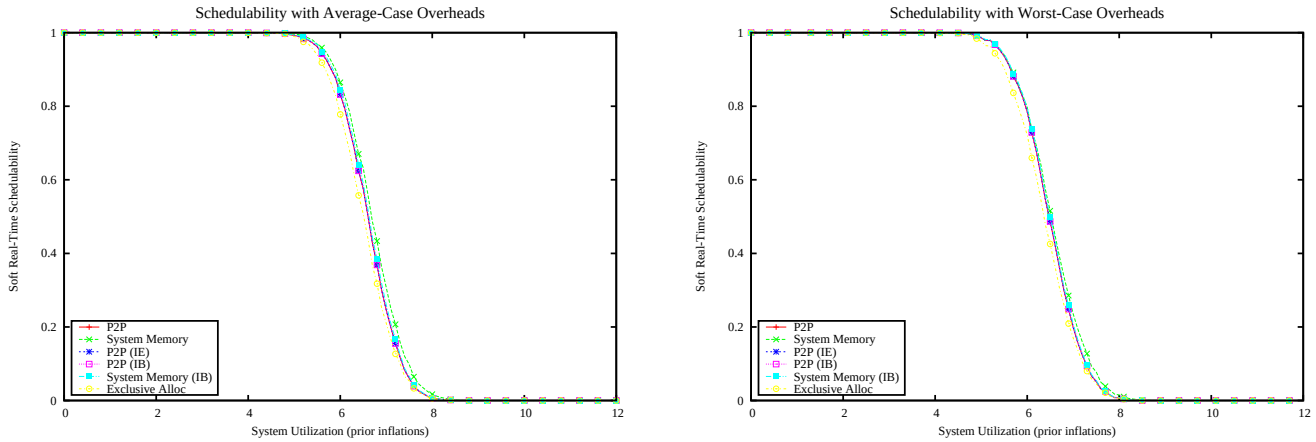

Figure 5330: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

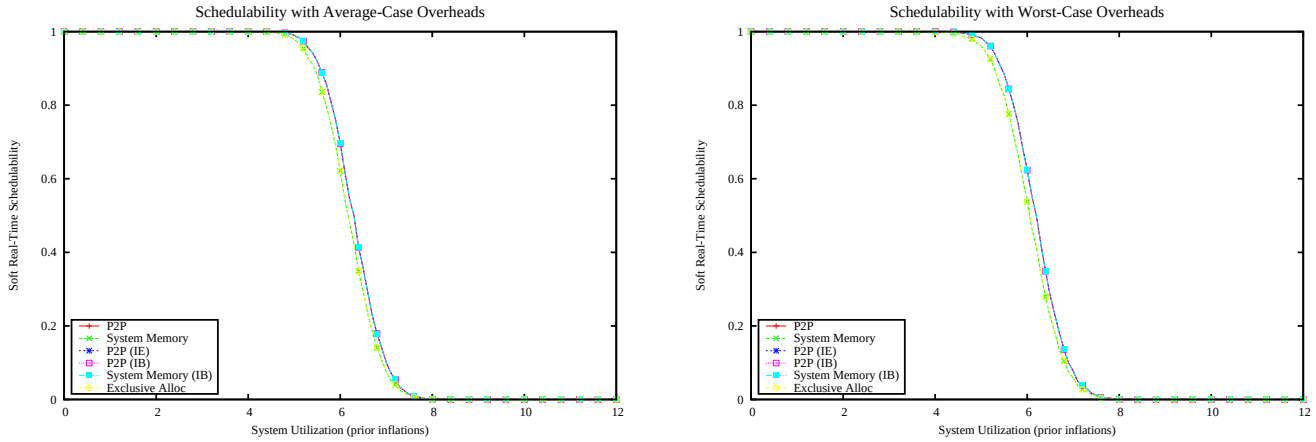

Figure 5331: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

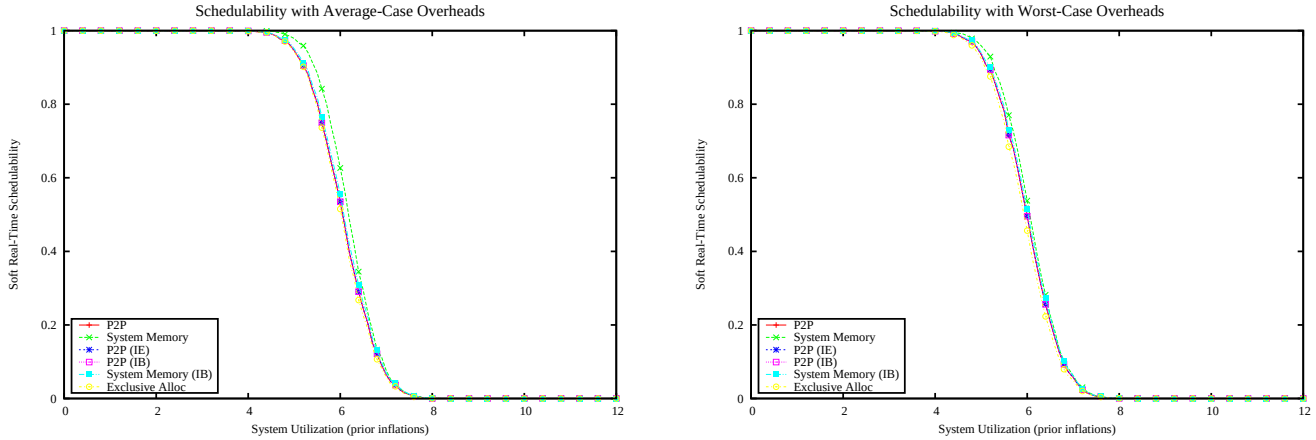

Figure 5332: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

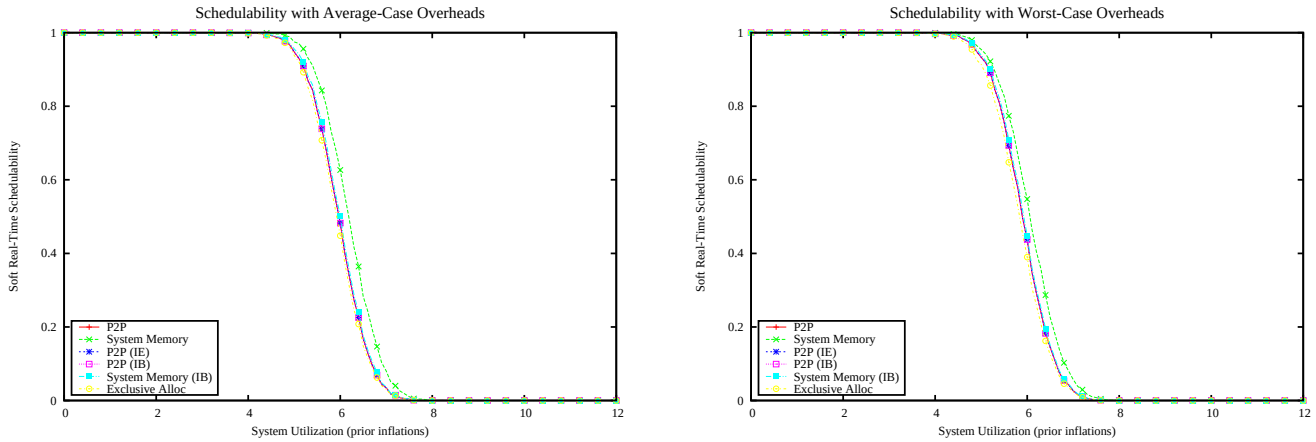

Figure 5333: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

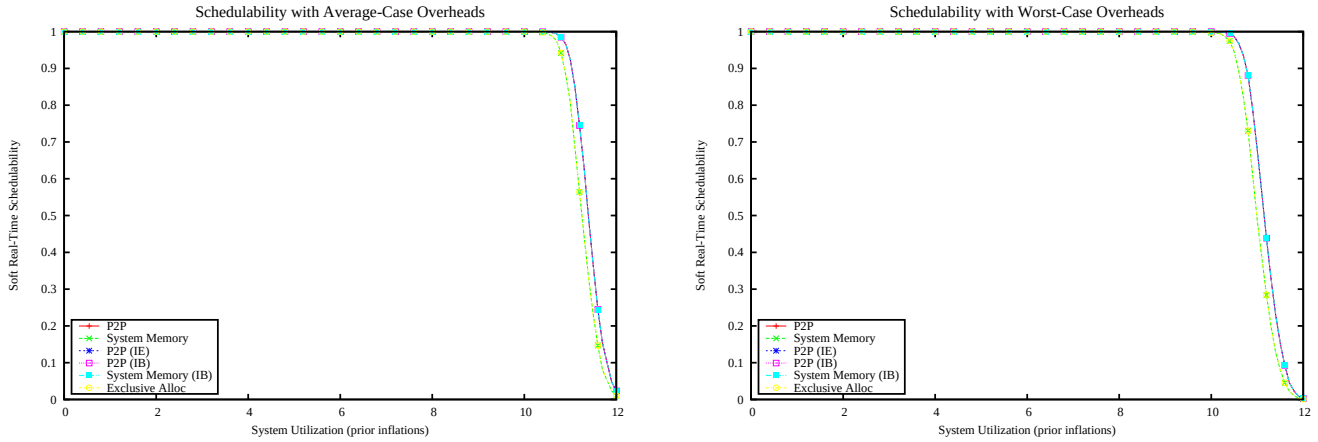

Figure 5334: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

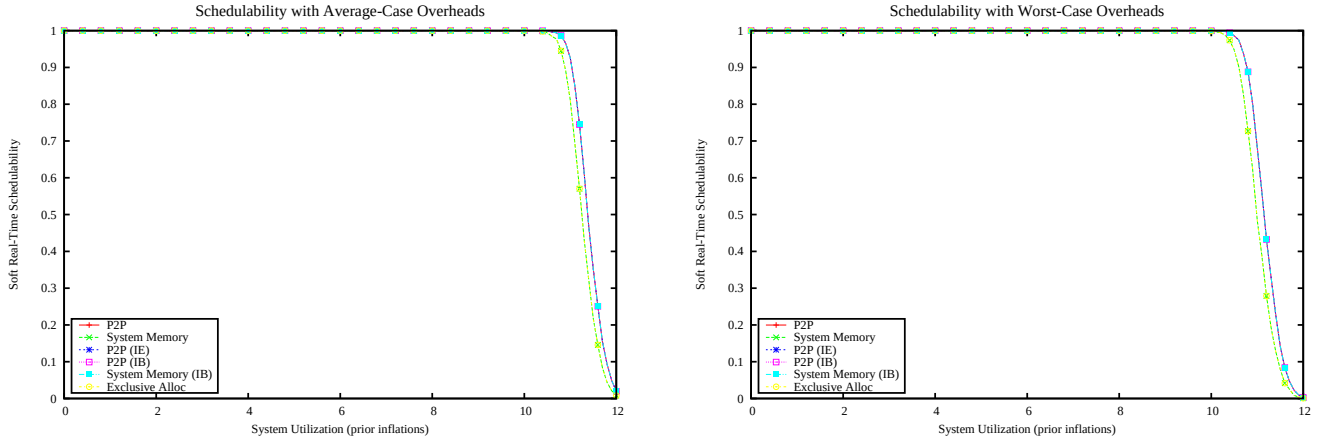

Figure 5335: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

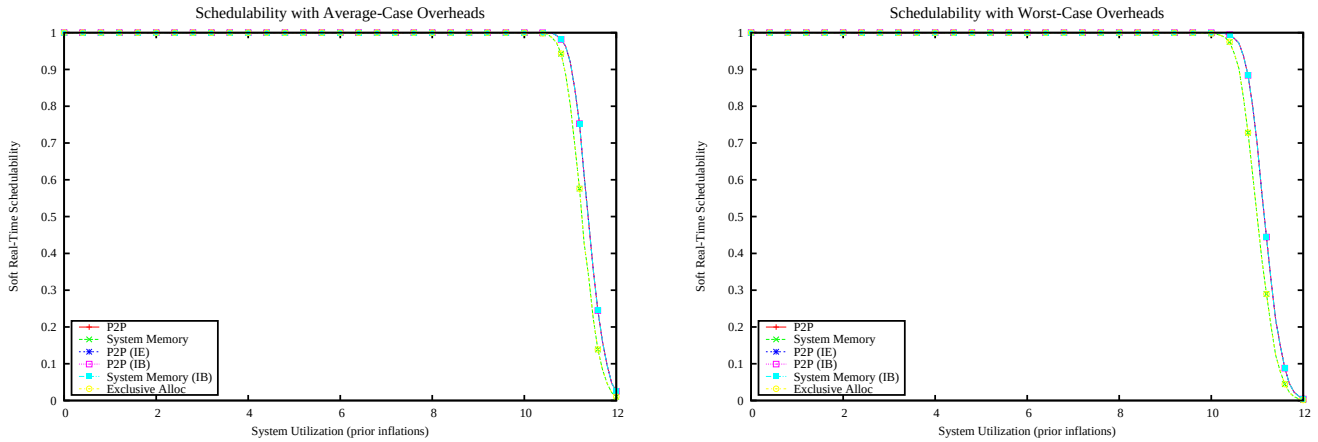

Figure 5336: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

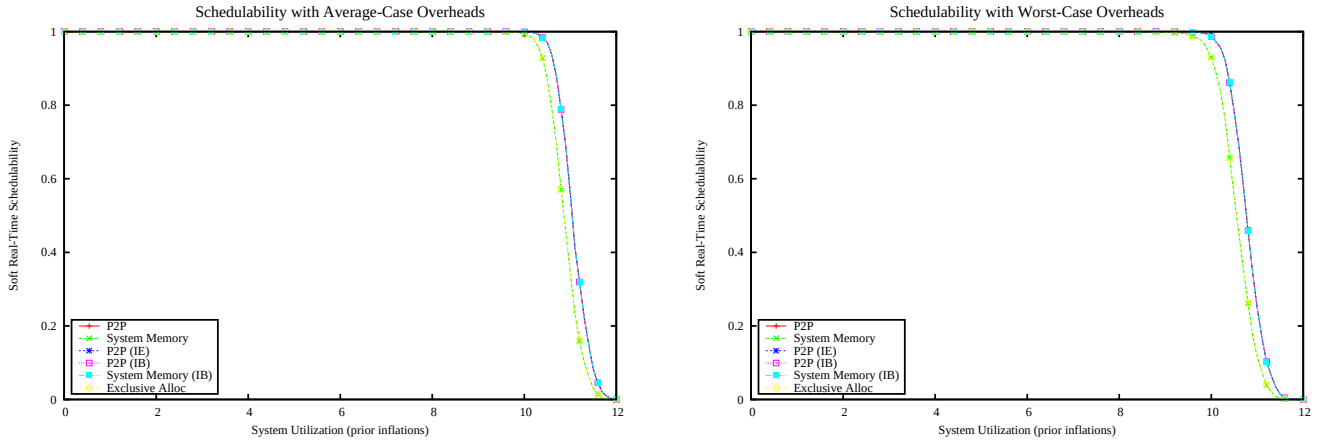

Figure 5337: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

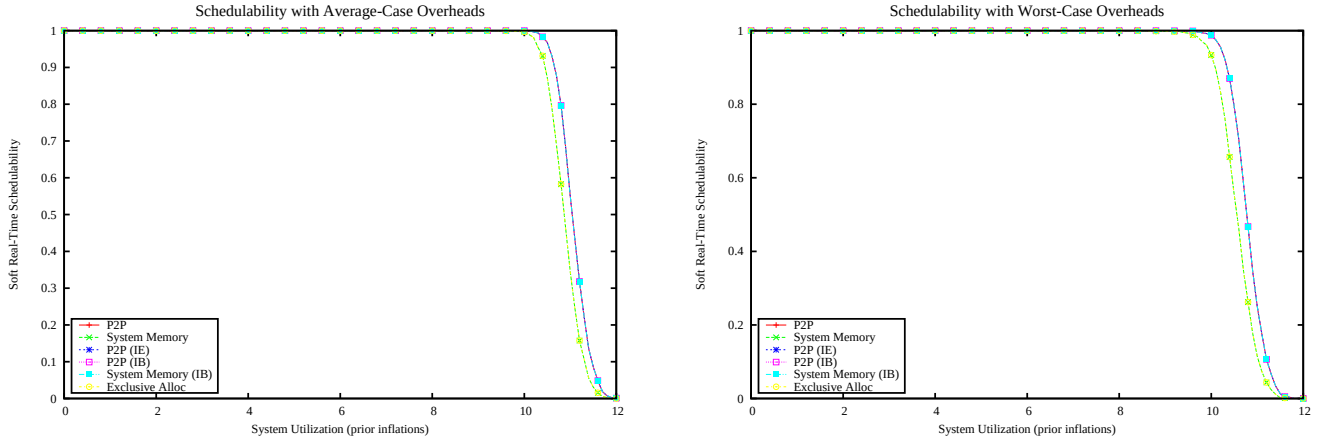

Figure 5338: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

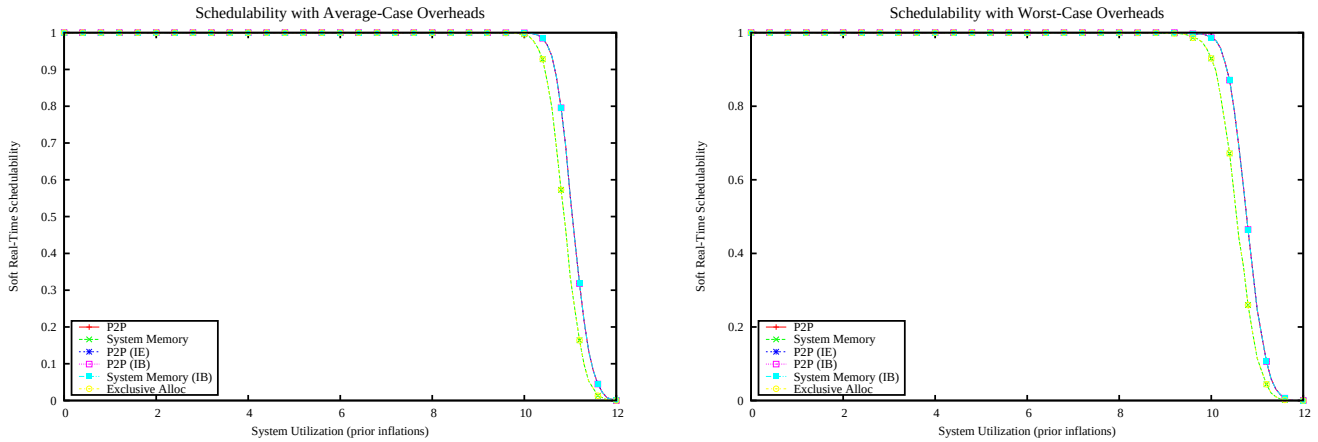

Figure 5339: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

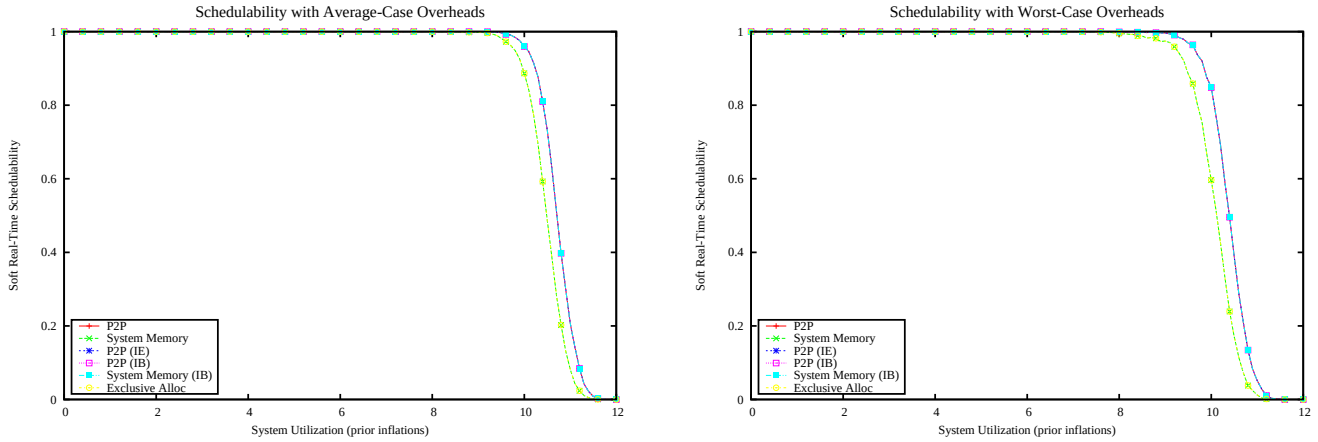

Figure 5340: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

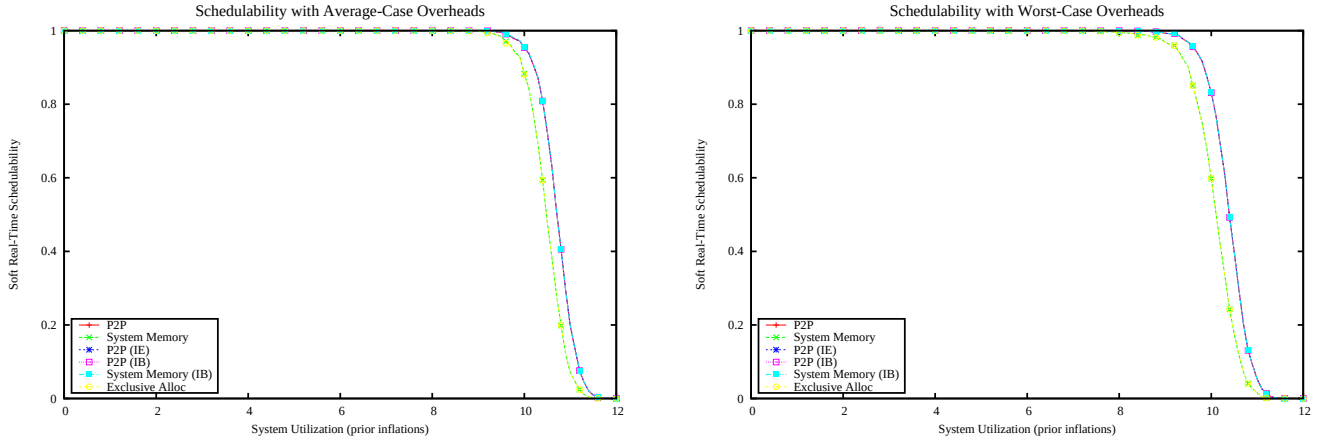

Figure 5341: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

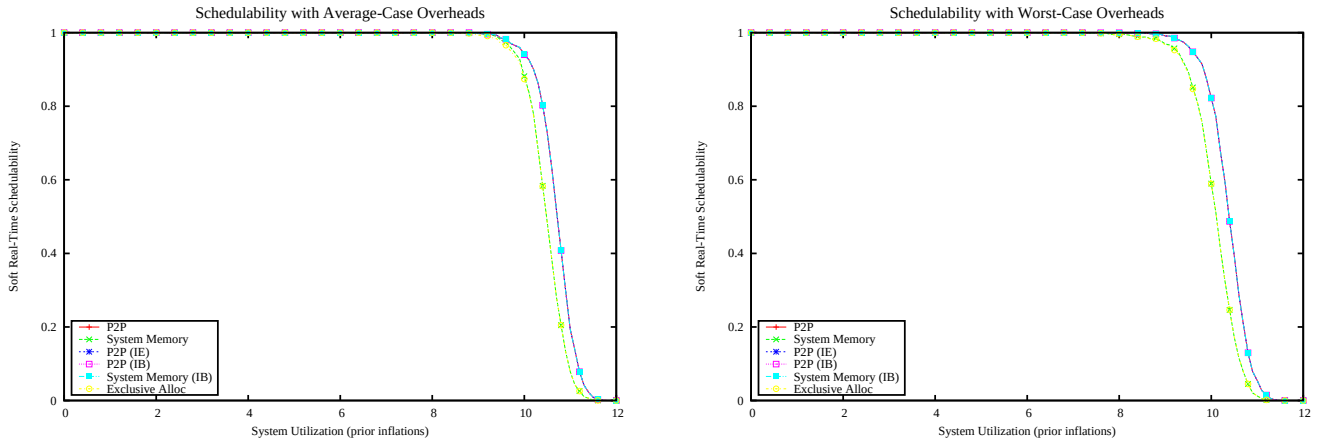

Figure 5342: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

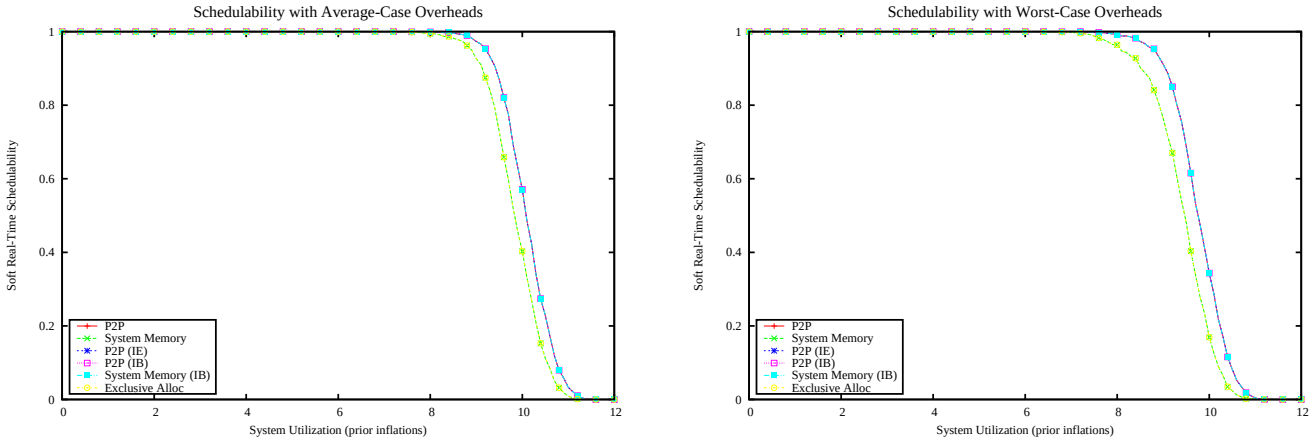

Figure 5343: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

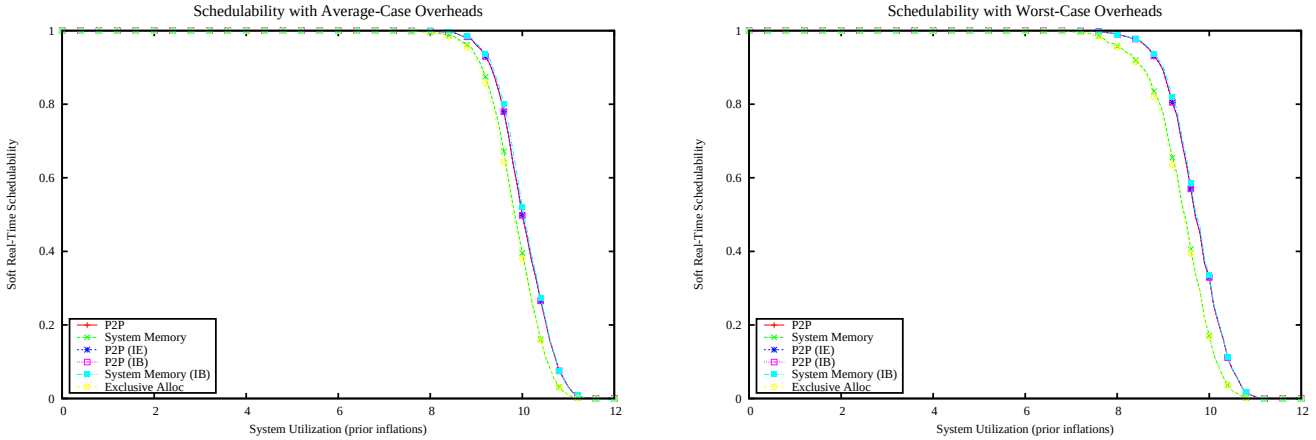

Figure 5344: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

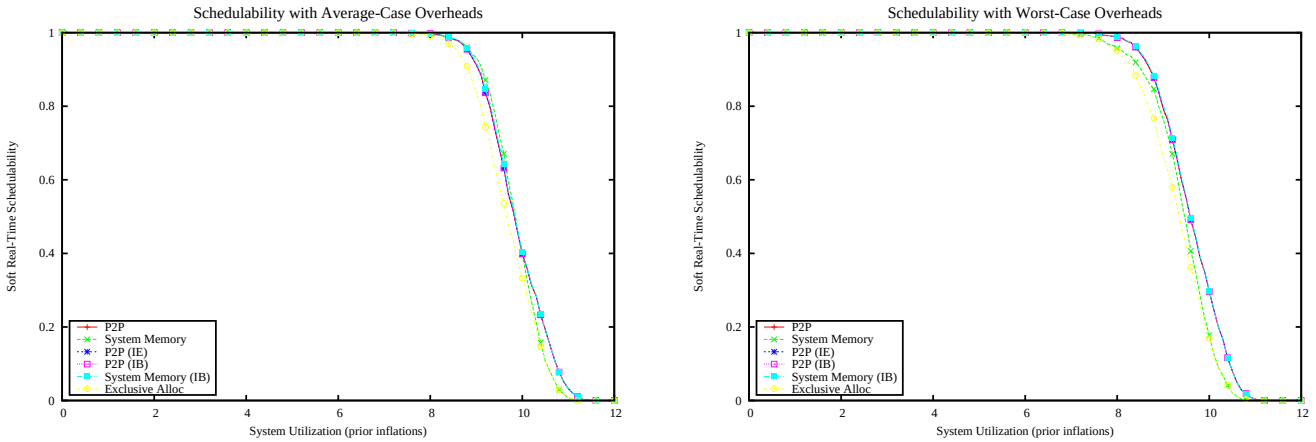

Figure 5345: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

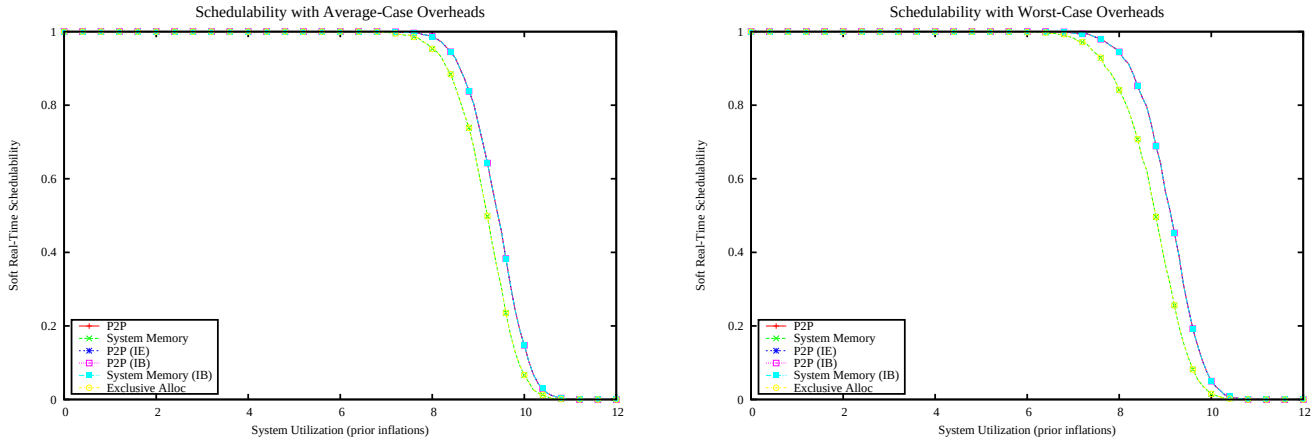

Figure 5346: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

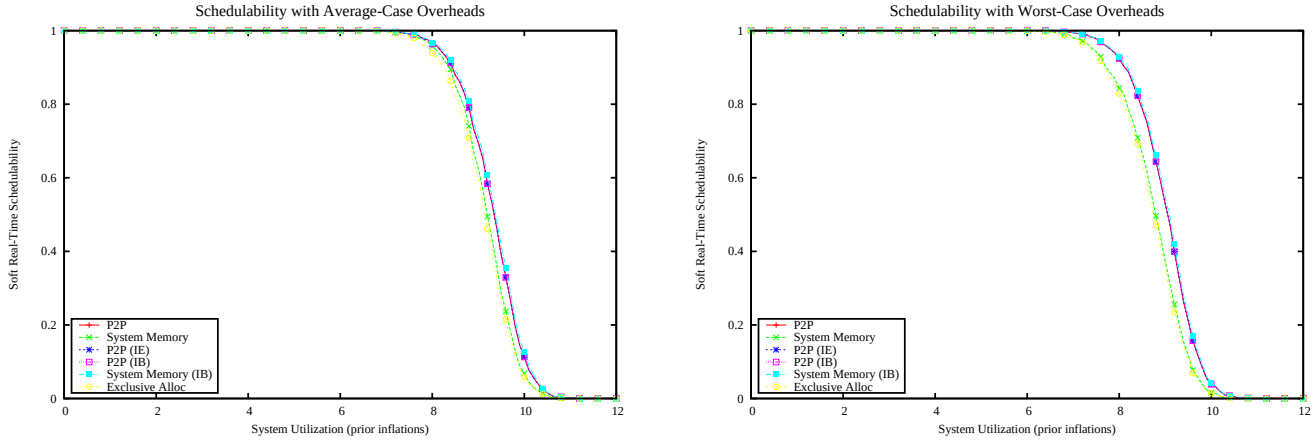

Figure 5347: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

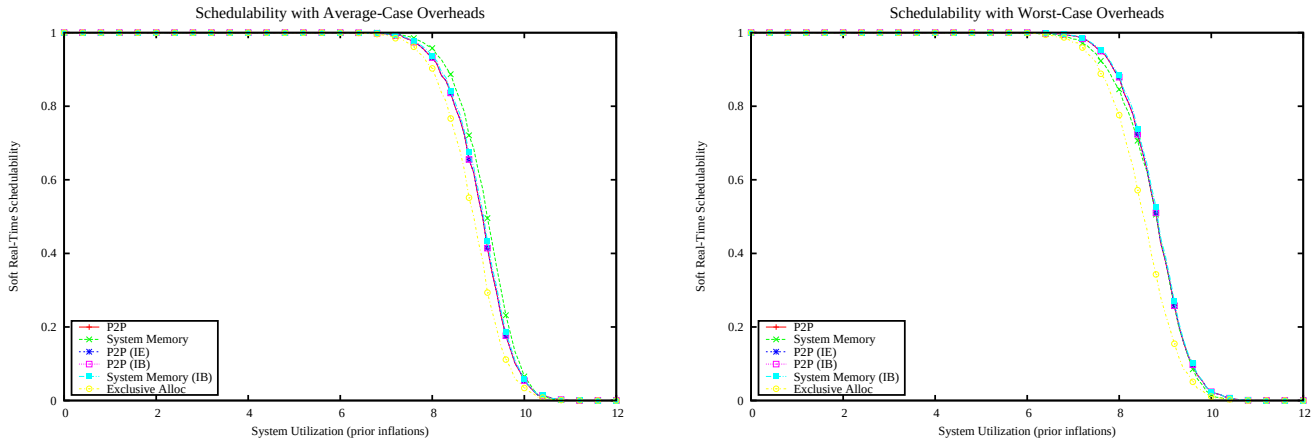

Figure 5348: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

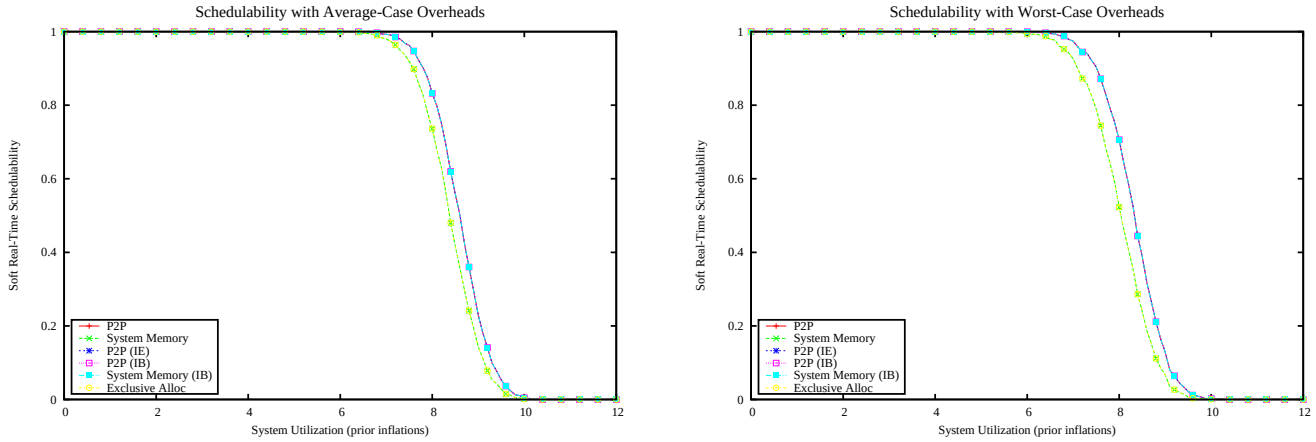

Figure 5349: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

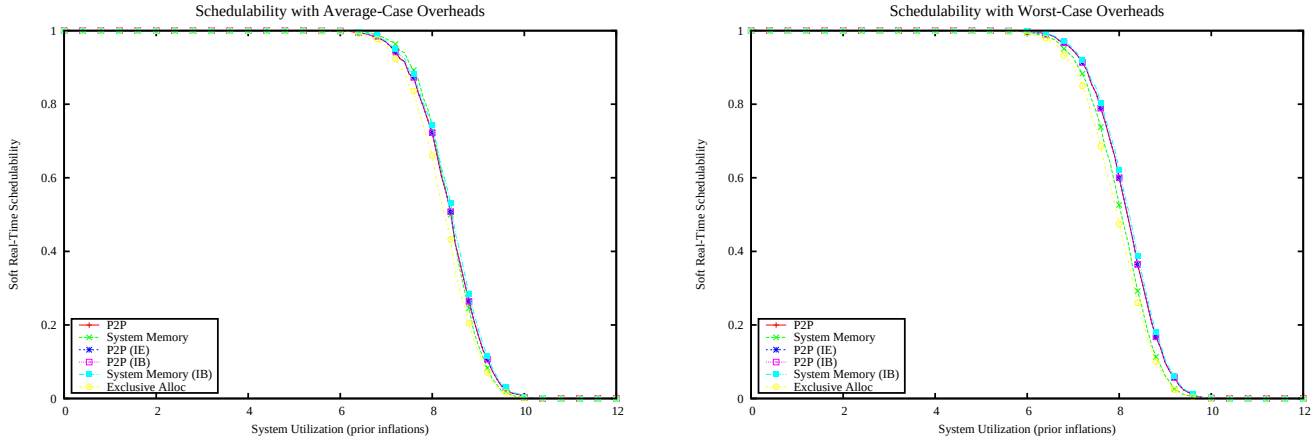

Figure 5350: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

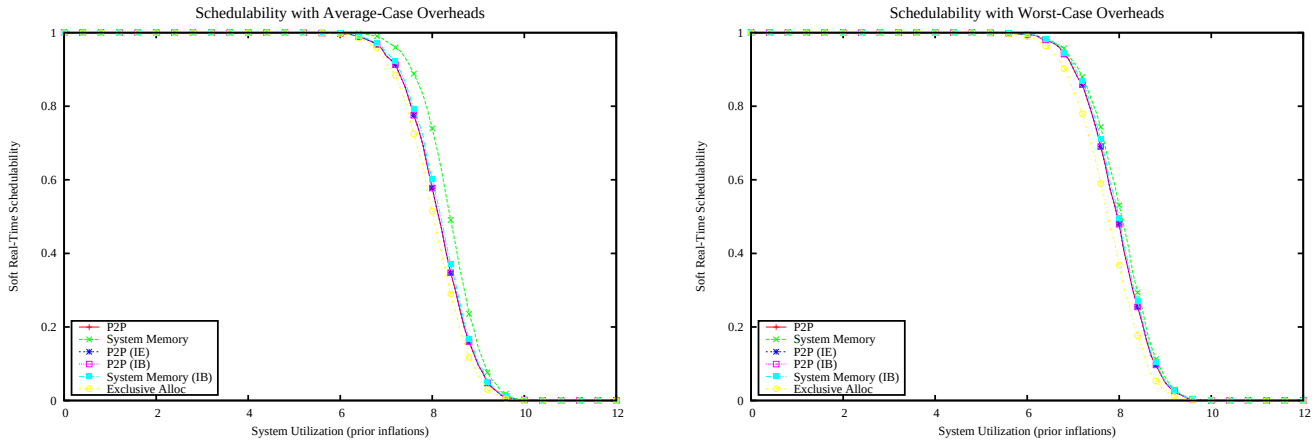

Figure 5351: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

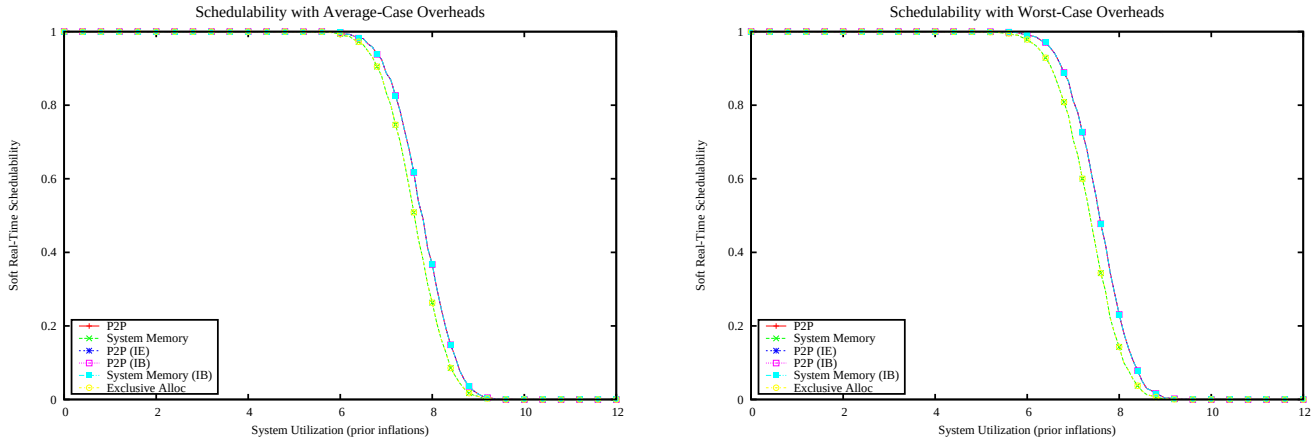

Figure 5352: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

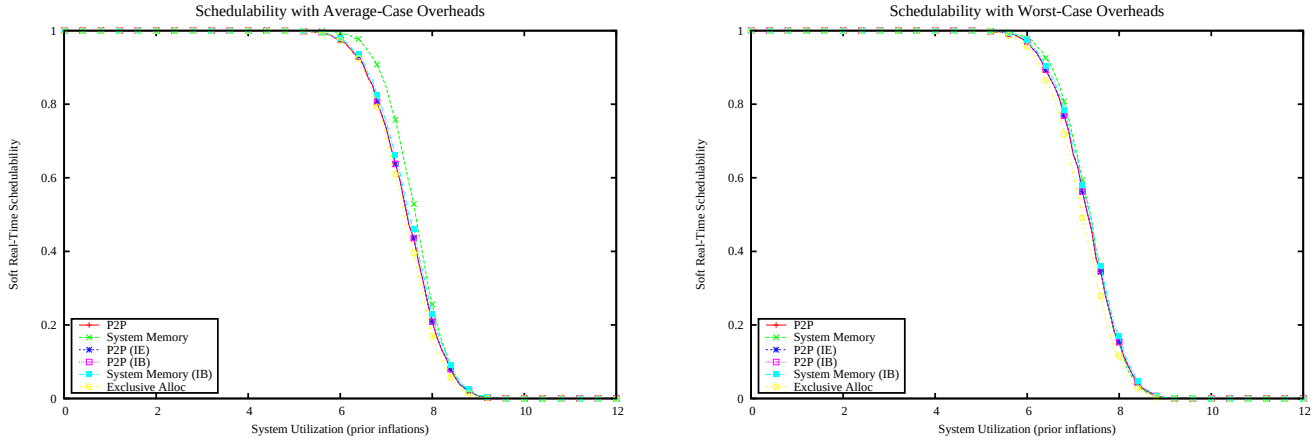

Figure 5353: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

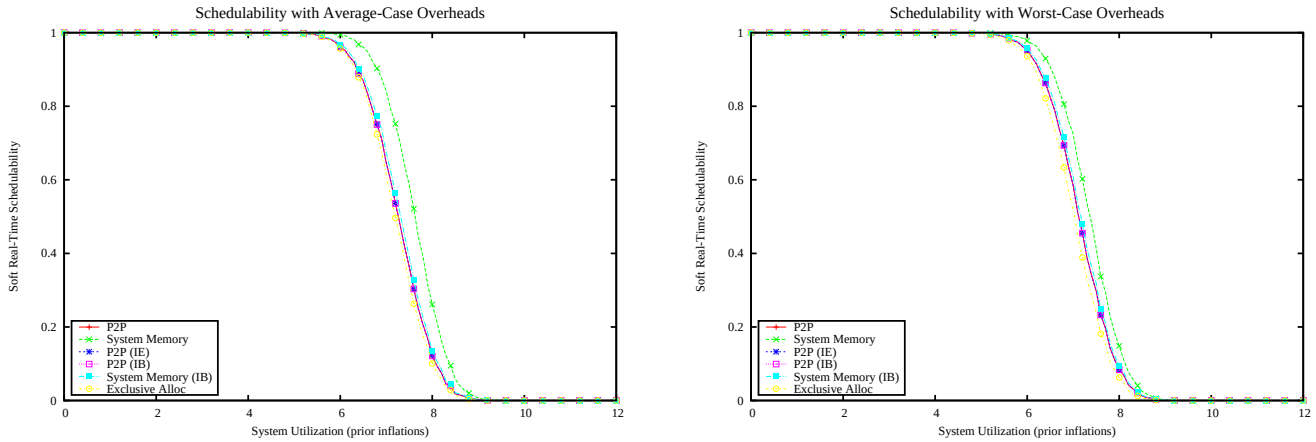

Figure 5354: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

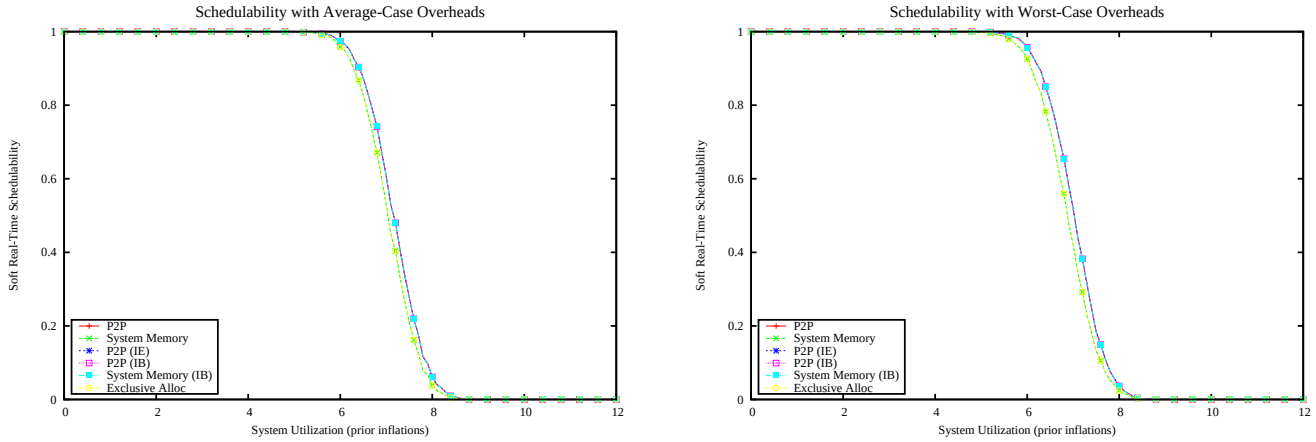

Figure 5355: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

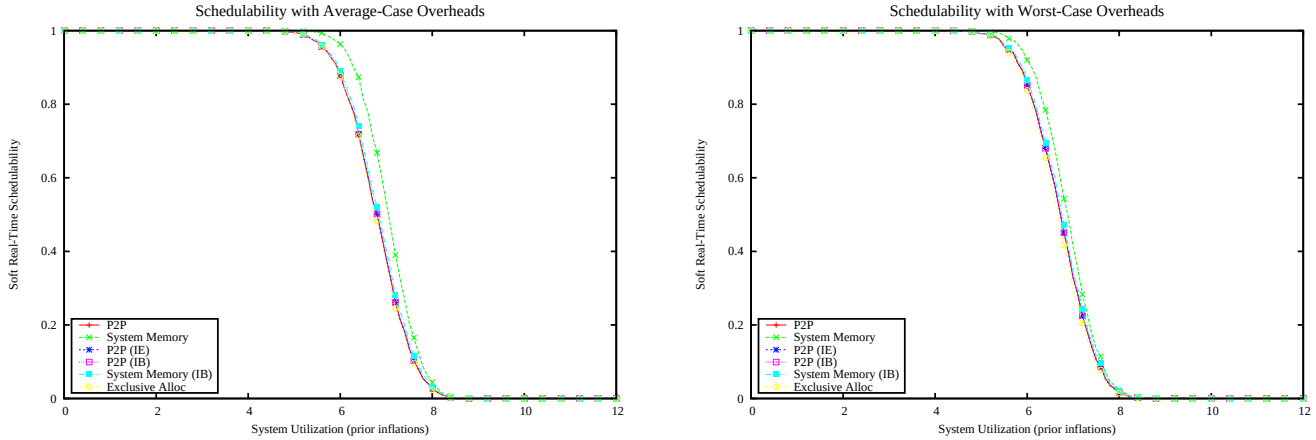

Figure 5356: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

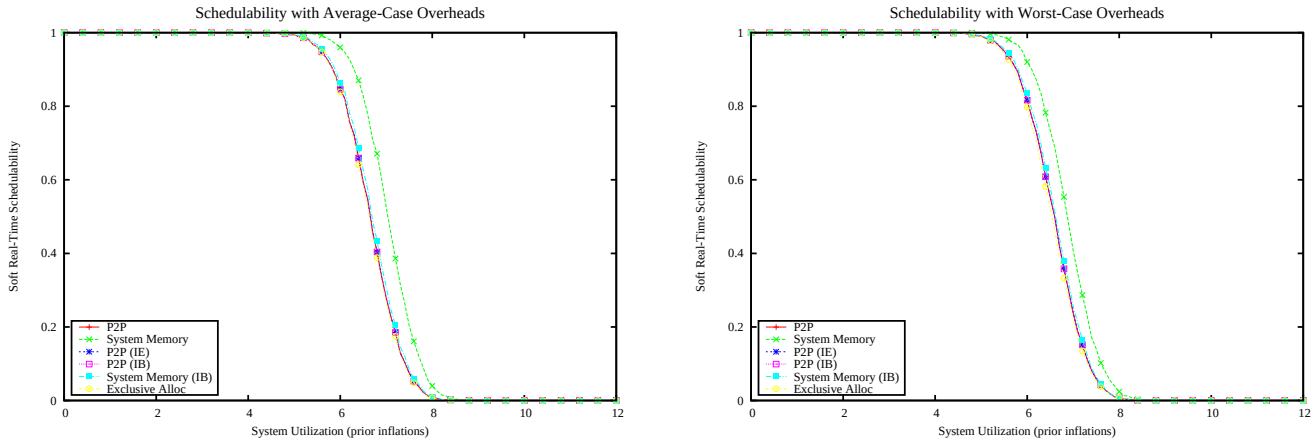

Figure 5357: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

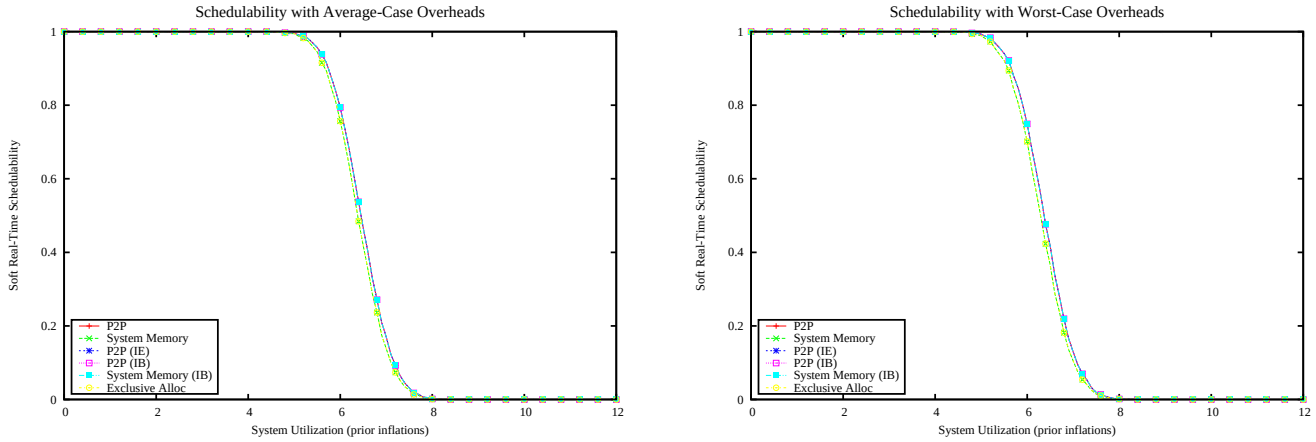

Figure 5358: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

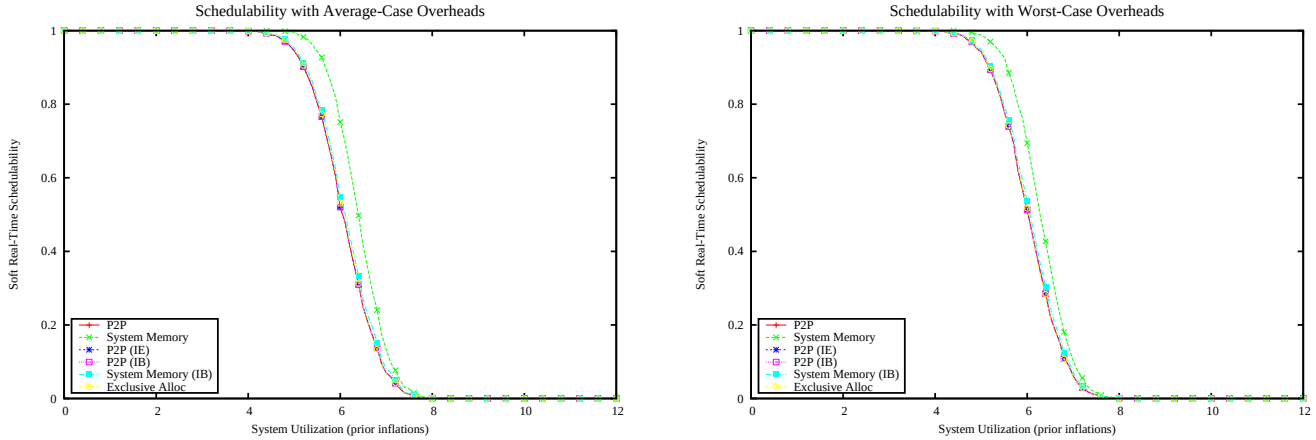

Figure 5359: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

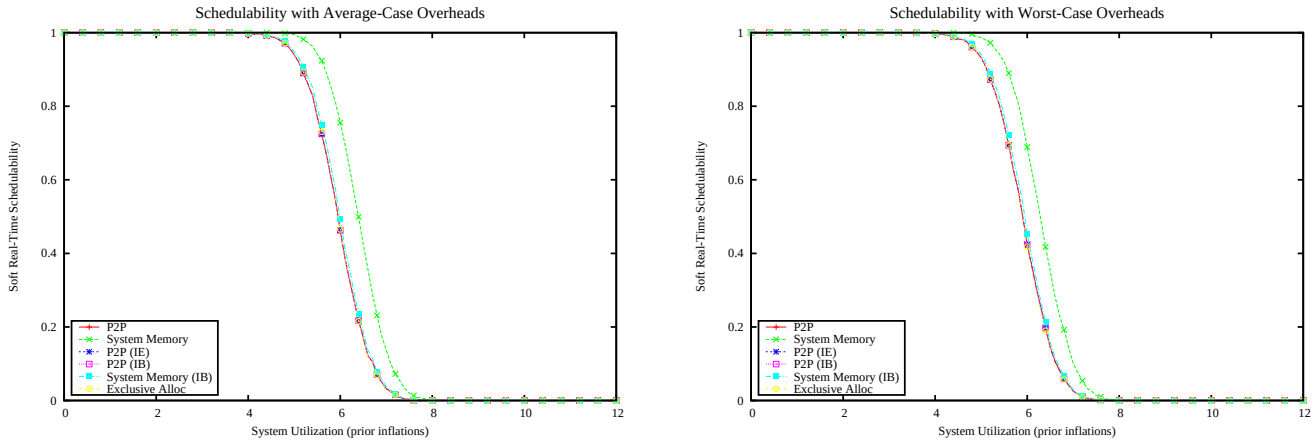

Figure 5360: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

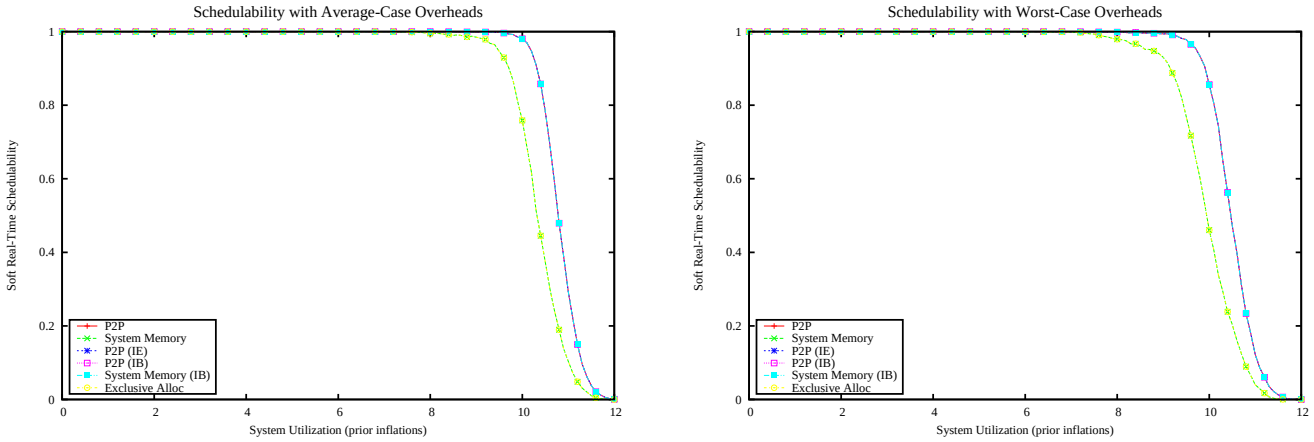

Figure 5361: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

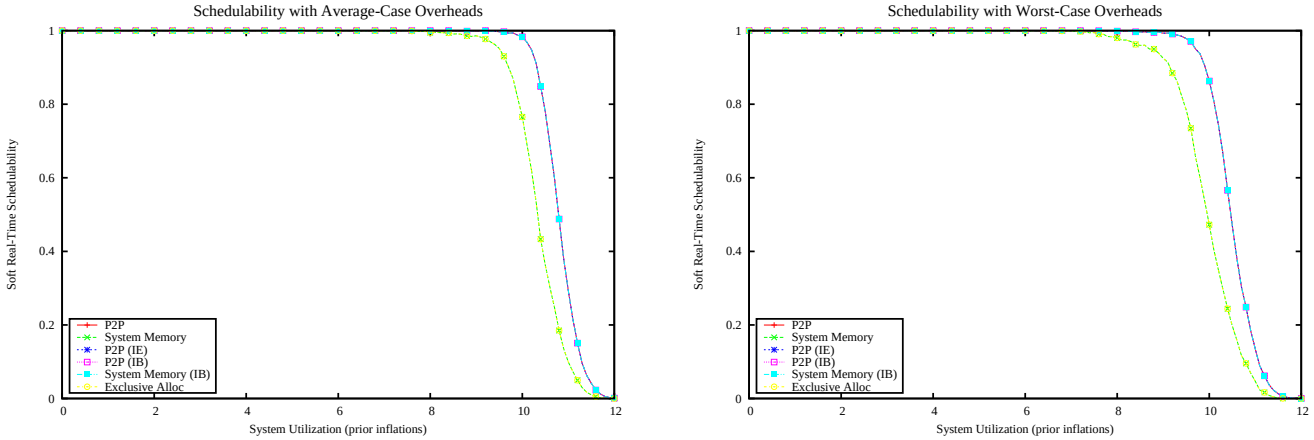

Figure 5362: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

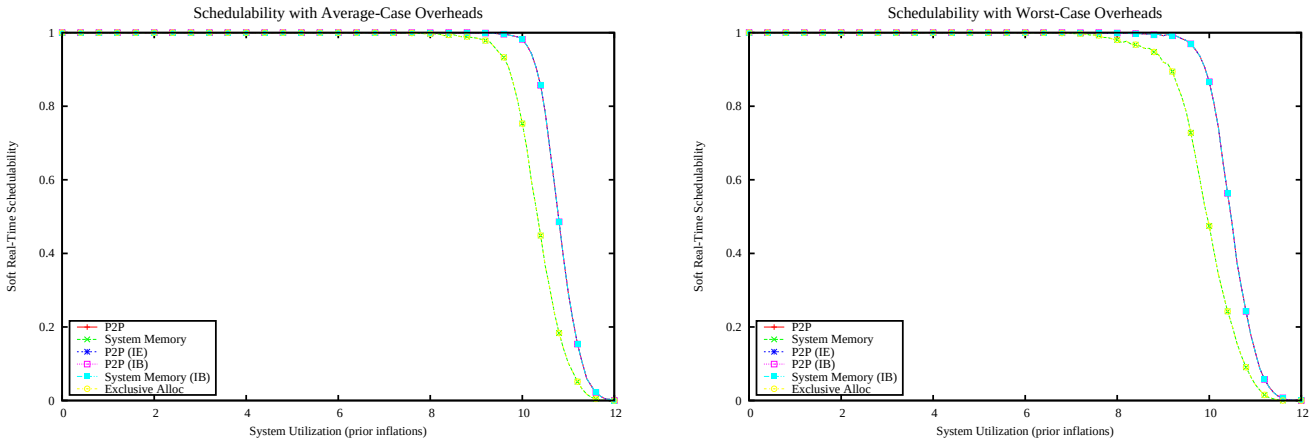

Figure 5363: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

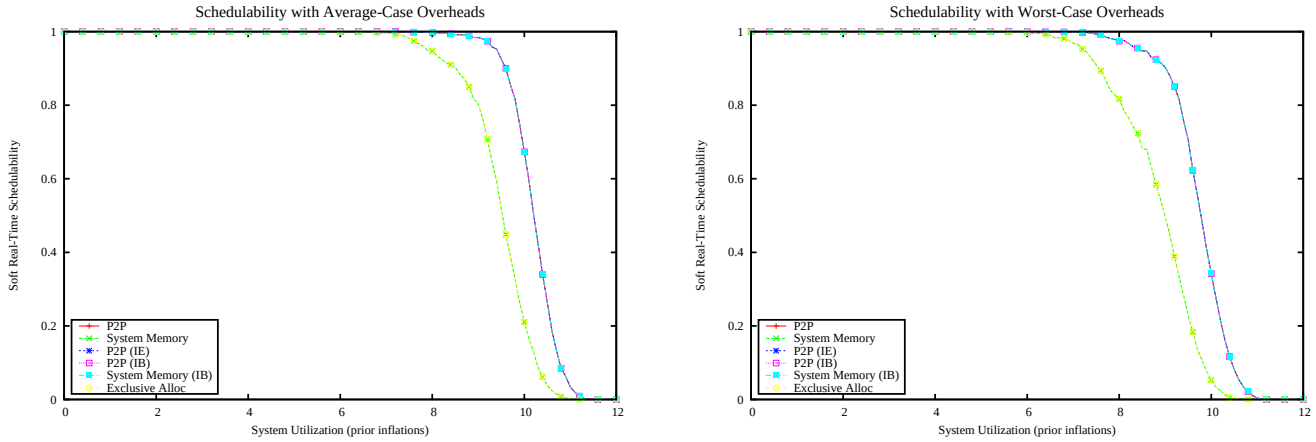

Figure 5364: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

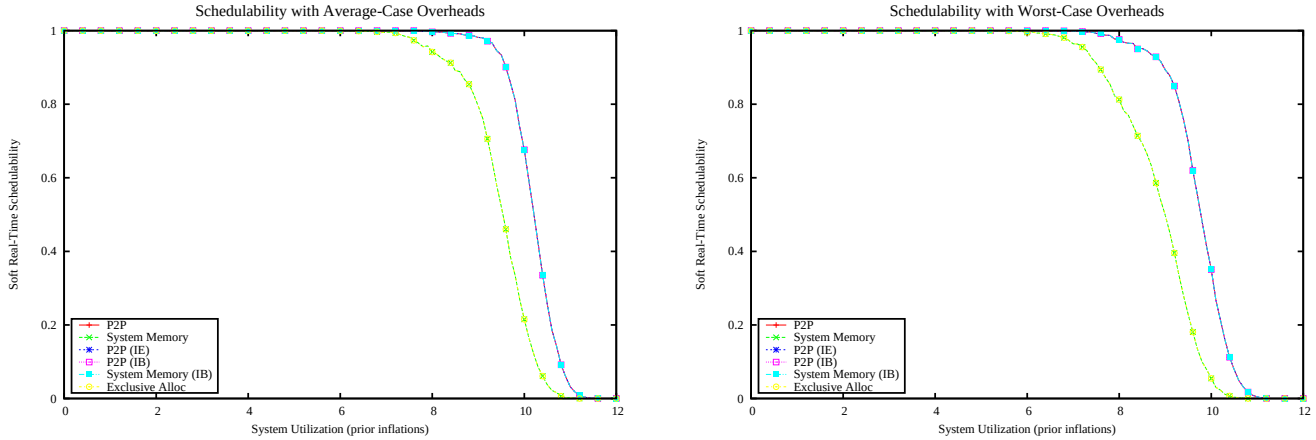

Figure 5365: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

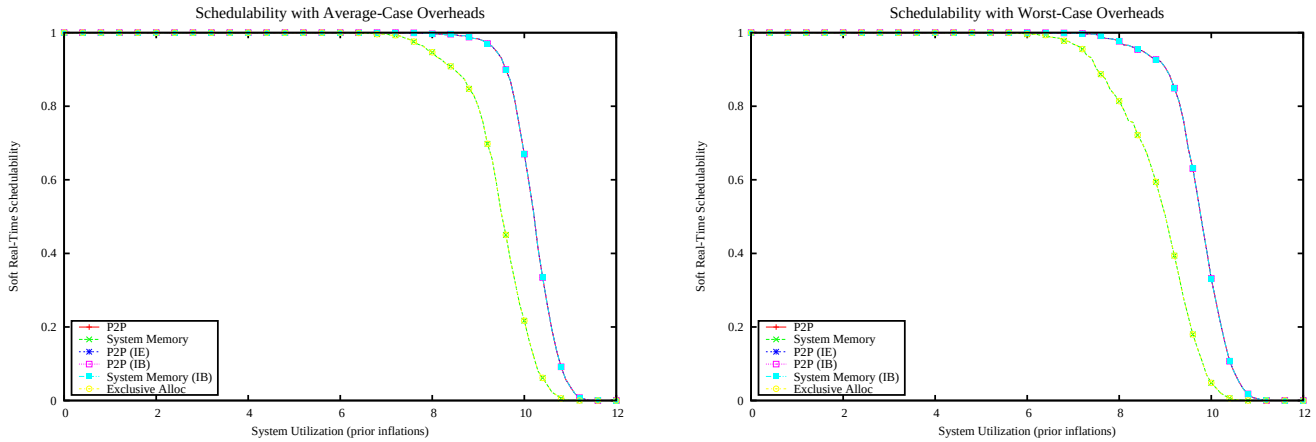

Figure 5366: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

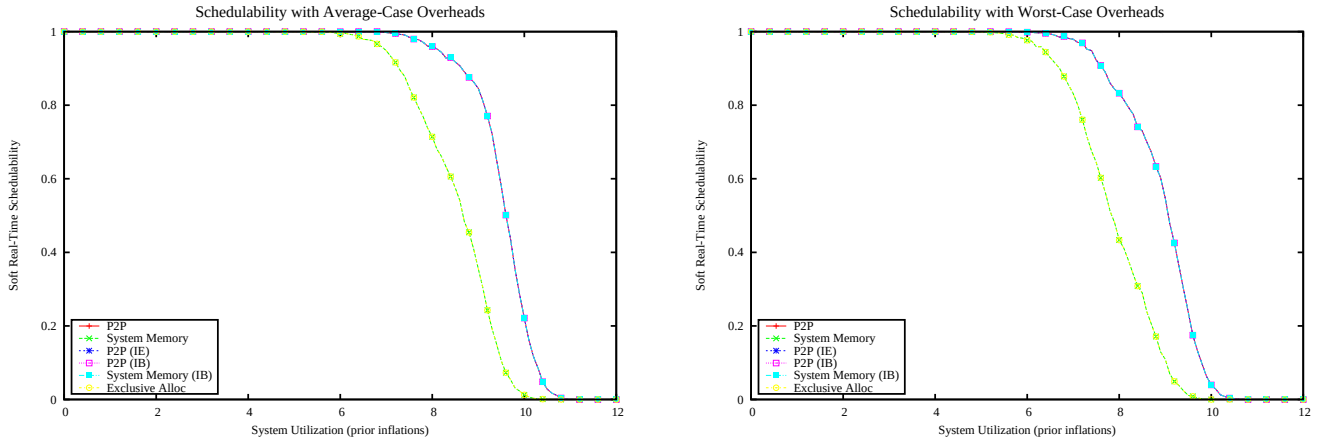

Figure 5367: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

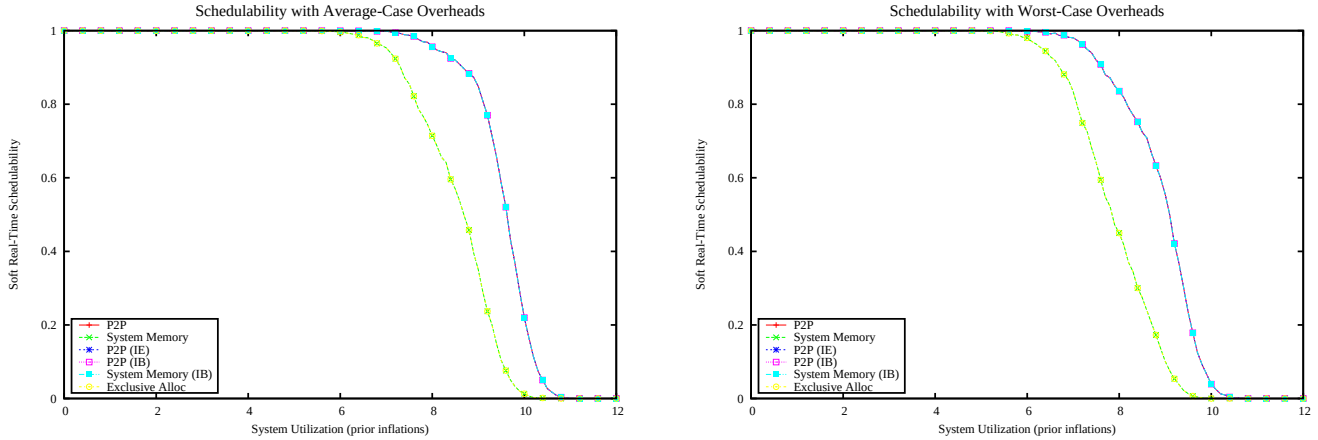

Figure 5368: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

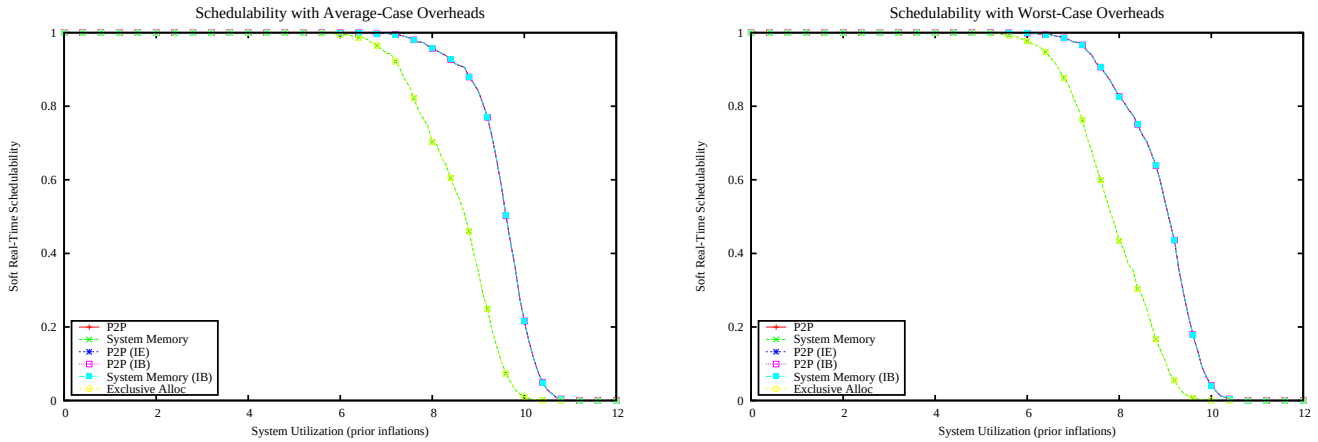

Figure 5369: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

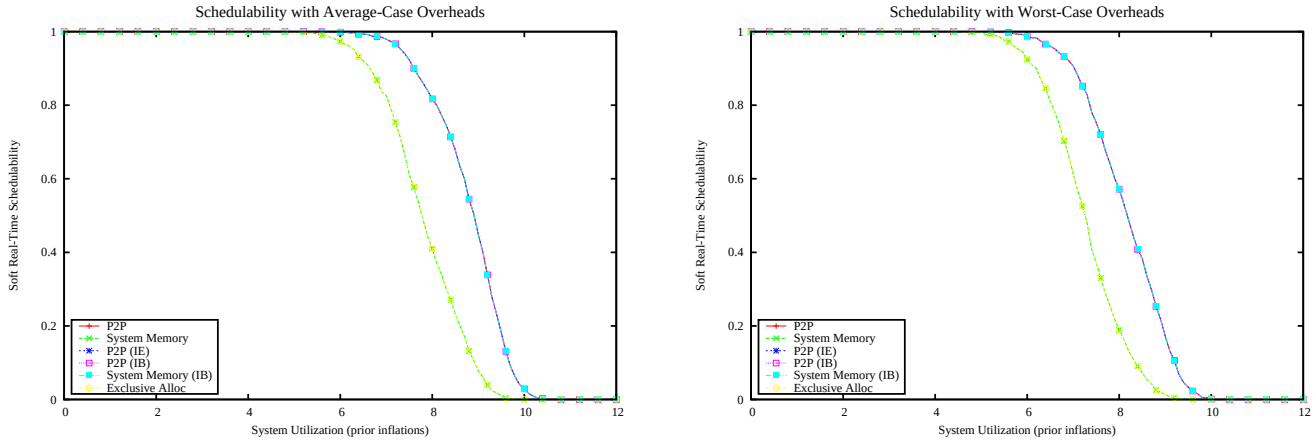

Figure 5370: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

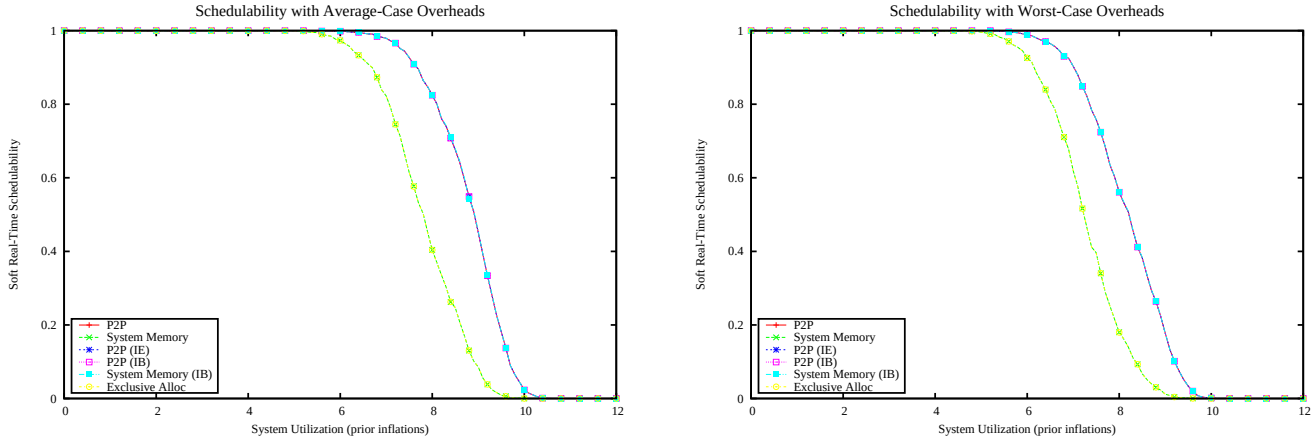

Figure 5371: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

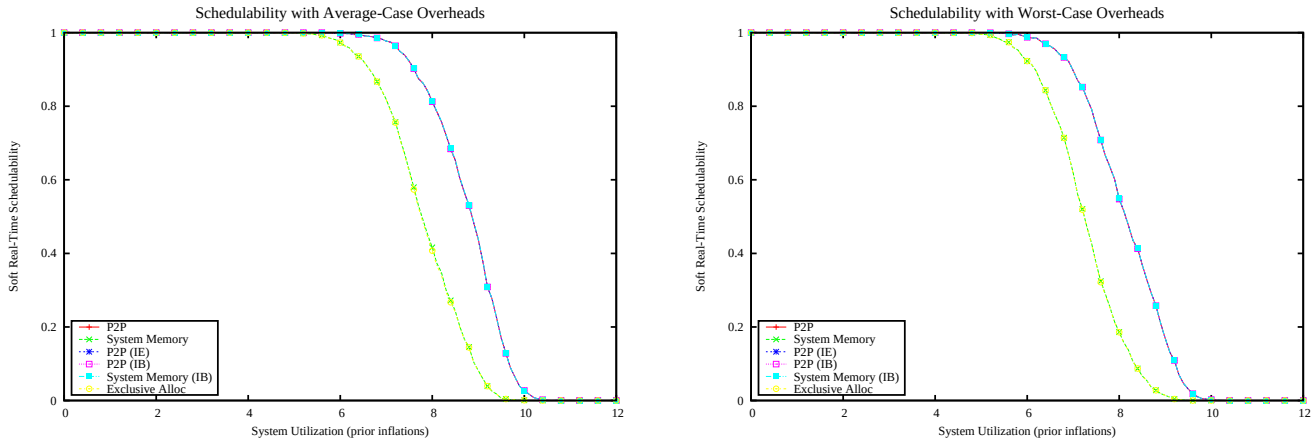

Figure 5372: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

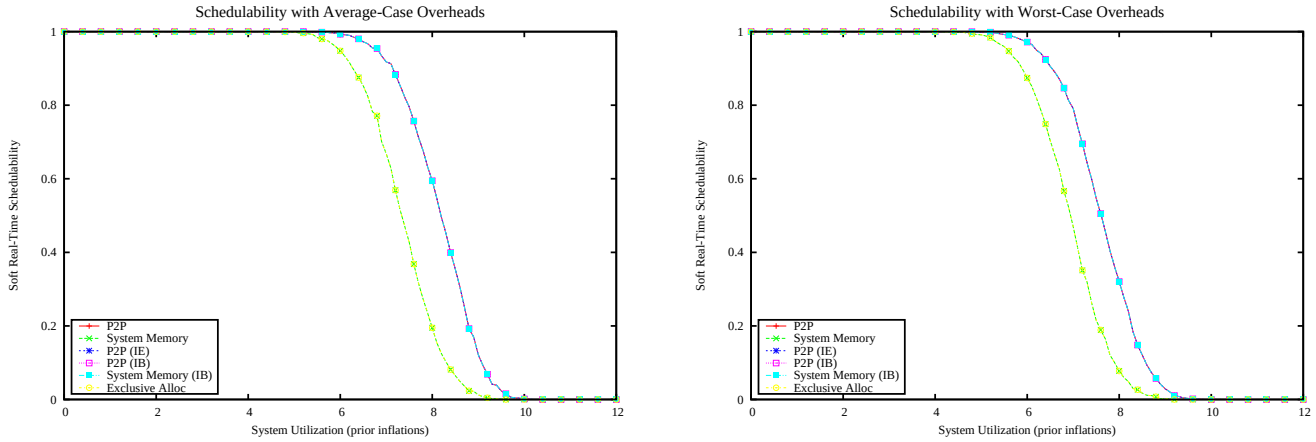

Figure 5373: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

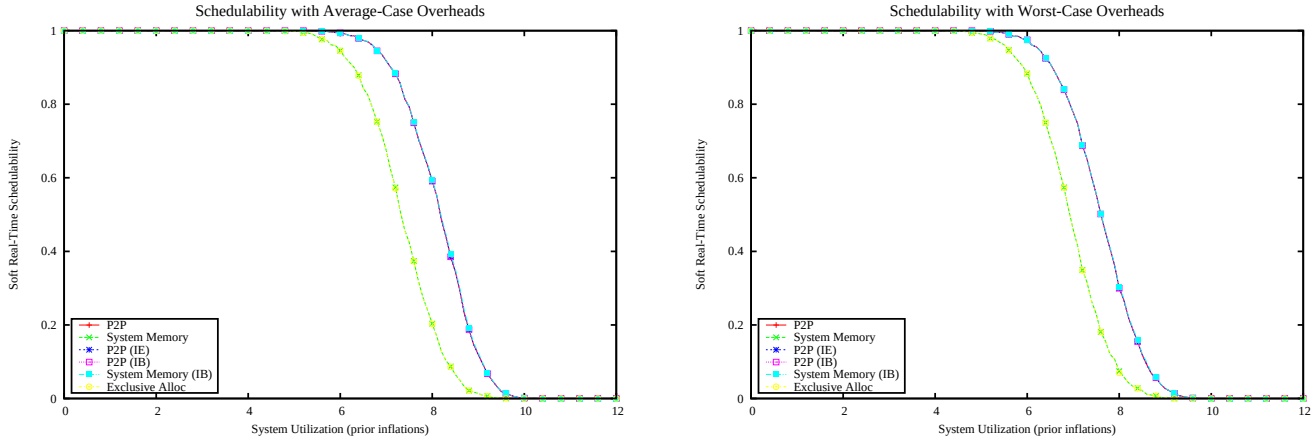

Figure 5374: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

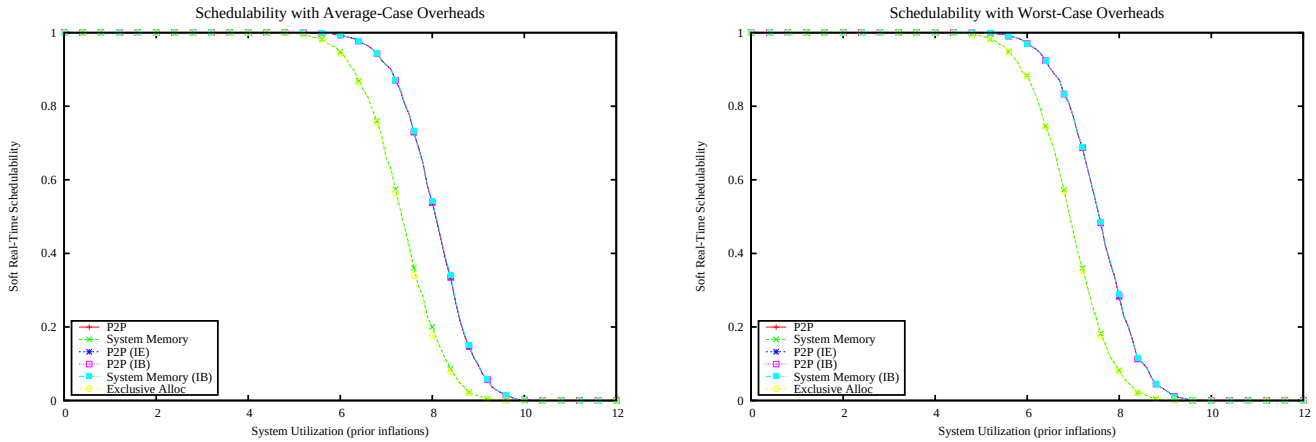

Figure 5375: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

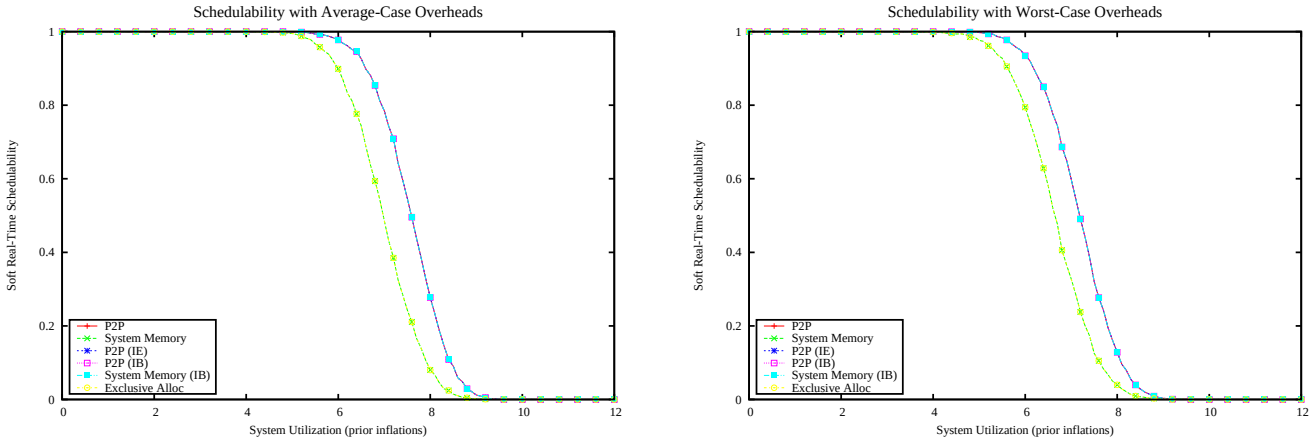

Figure 5376: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

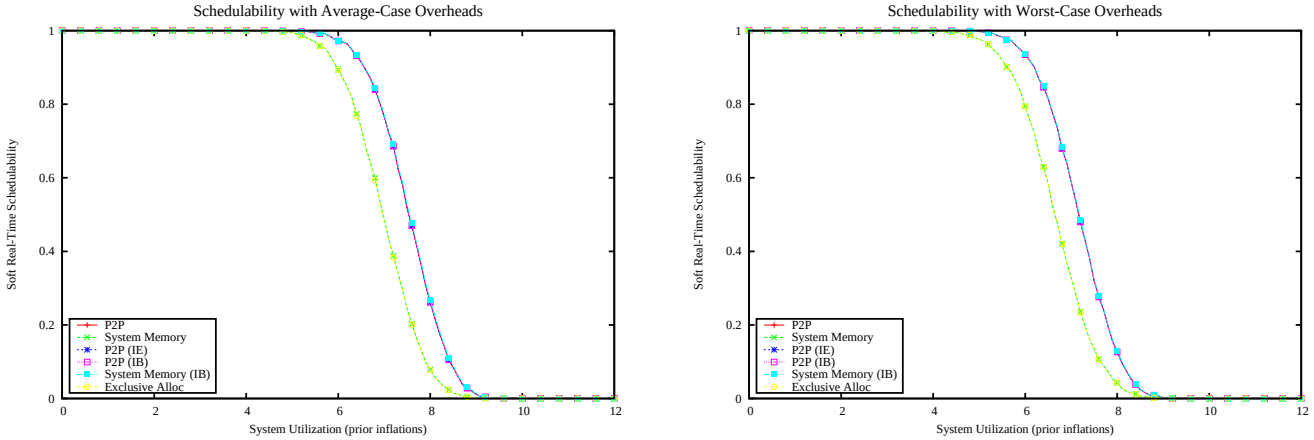

Figure 5377: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

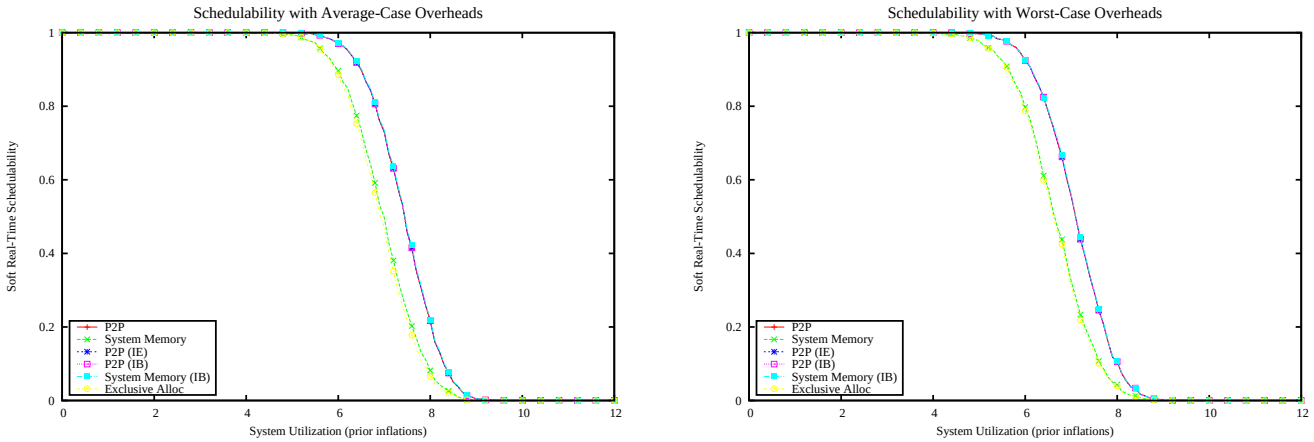

Figure 5378: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

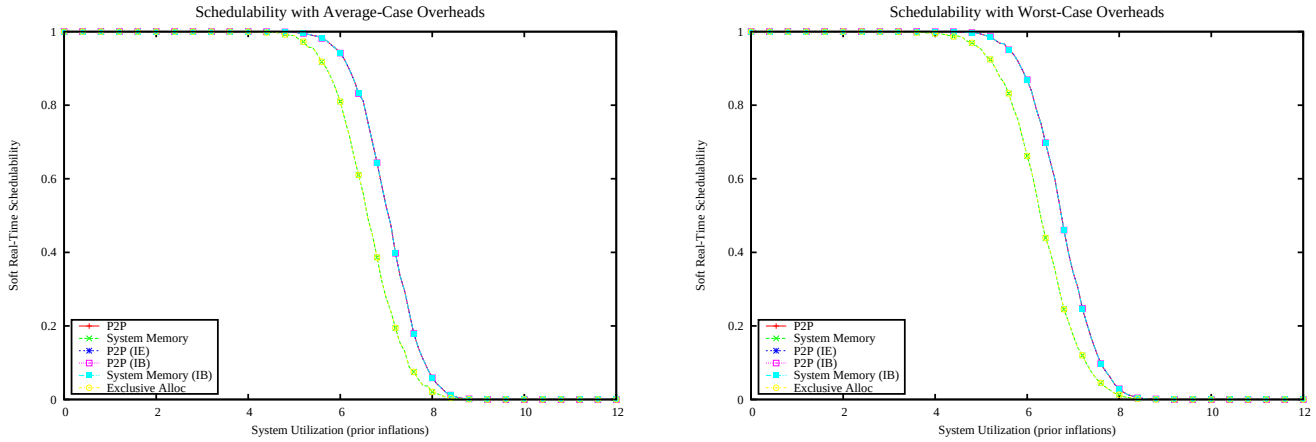

Figure 5379: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

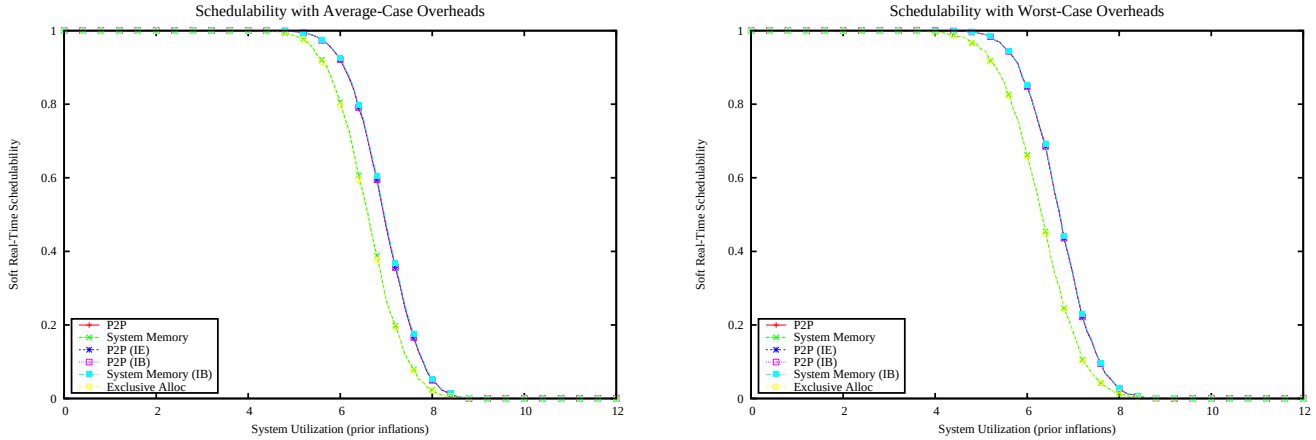

Figure 5380: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

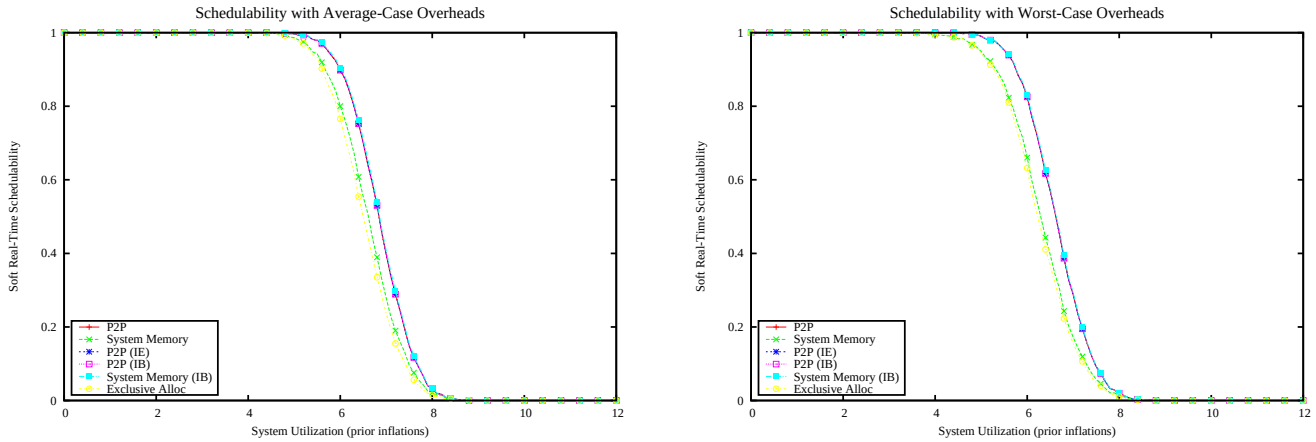

Figure 5381: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

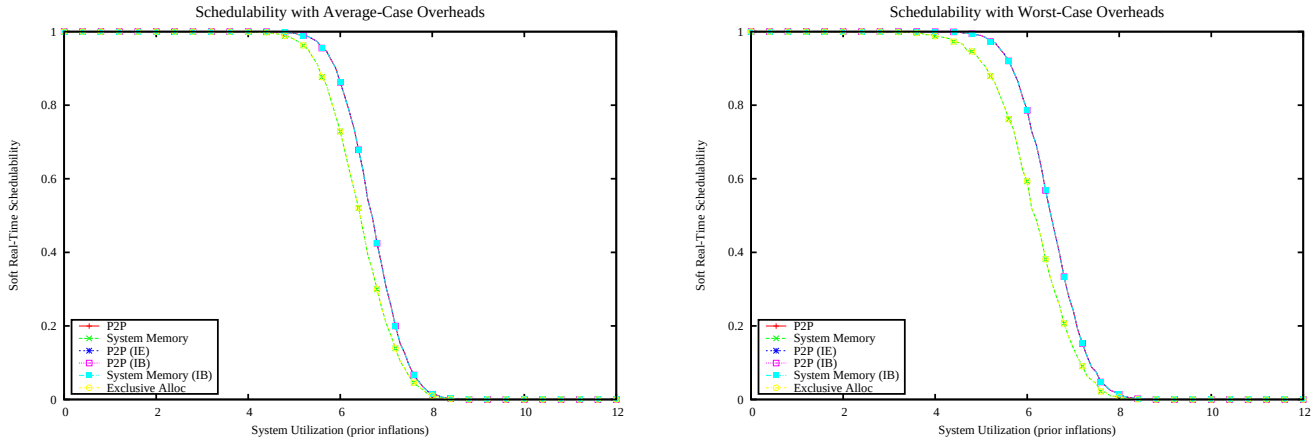

Figure 5382: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

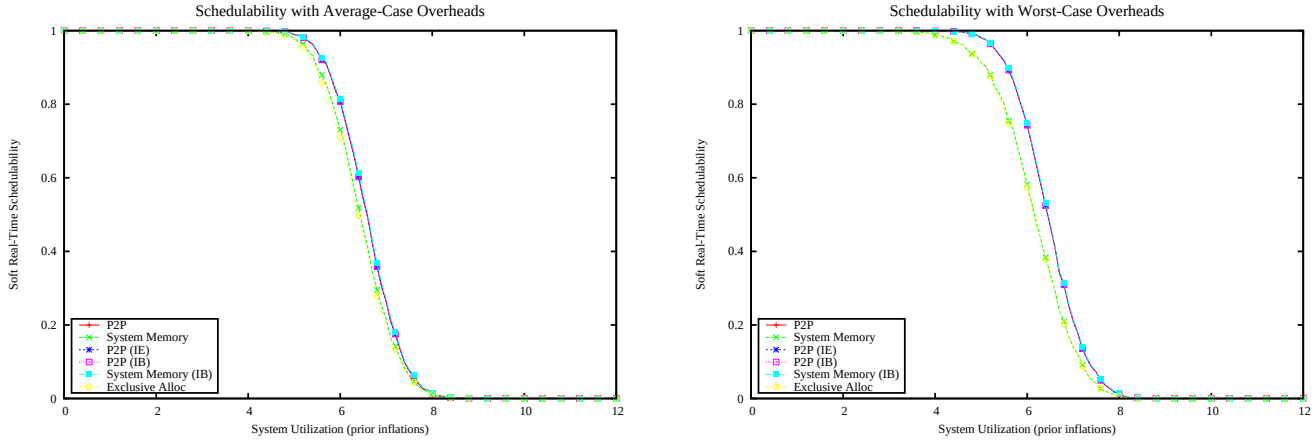

Figure 5383: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

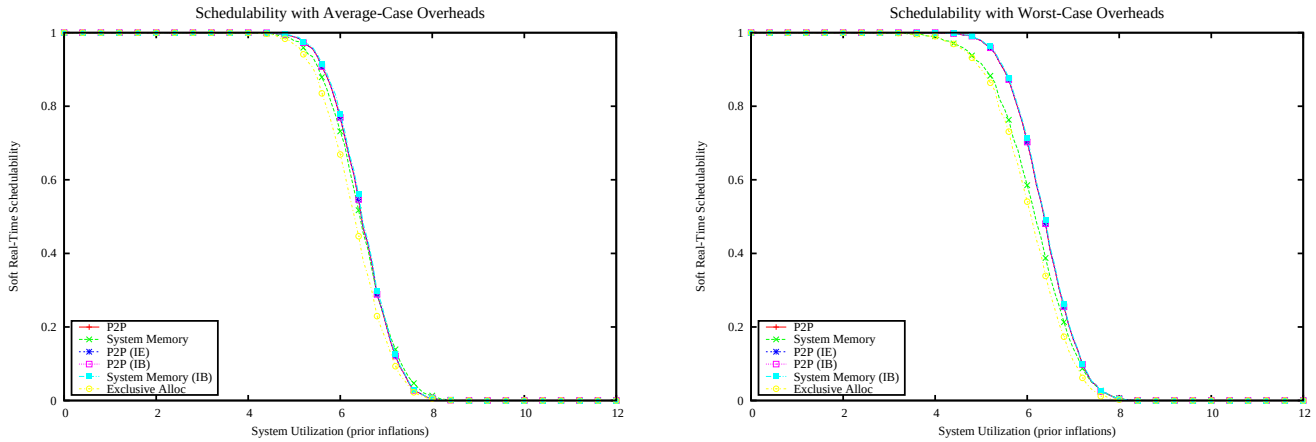

Figure 5384: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

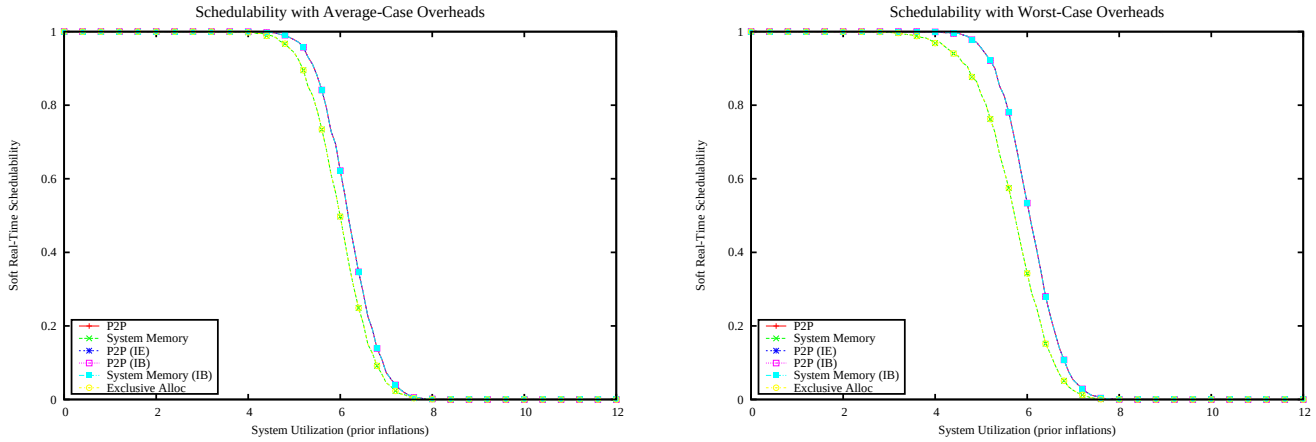

Figure 5385: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

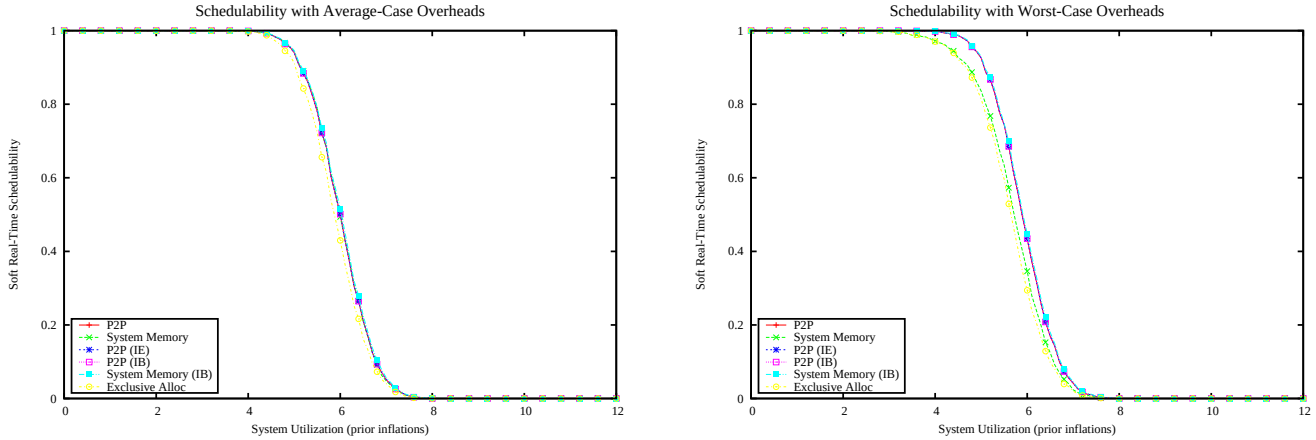

Figure 5386: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

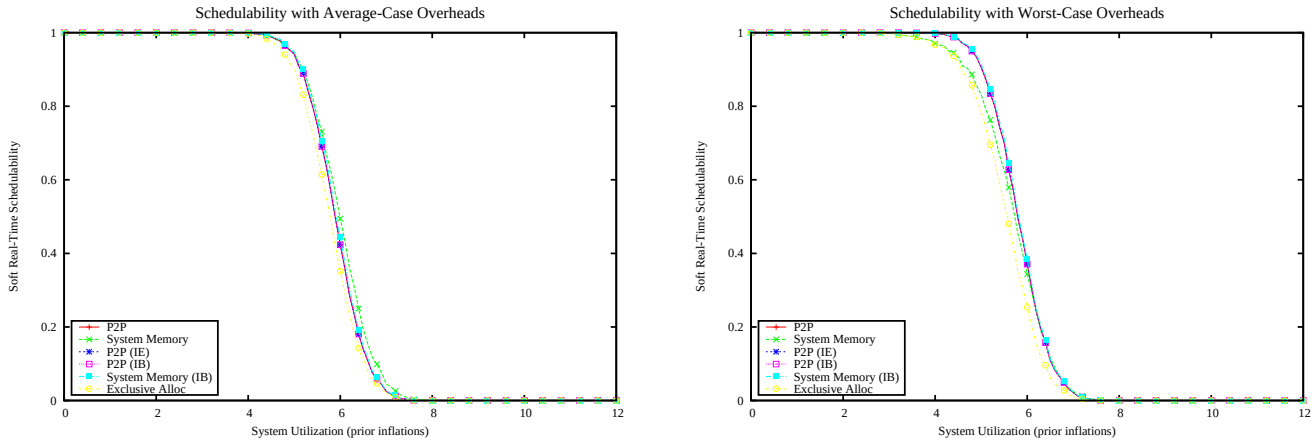

Figure 5387: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

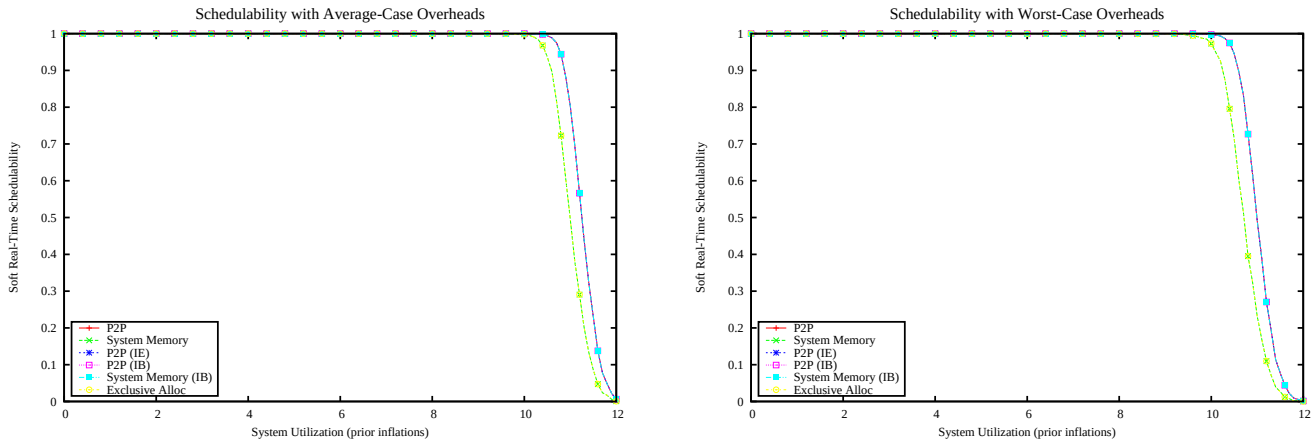

Figure 5388: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

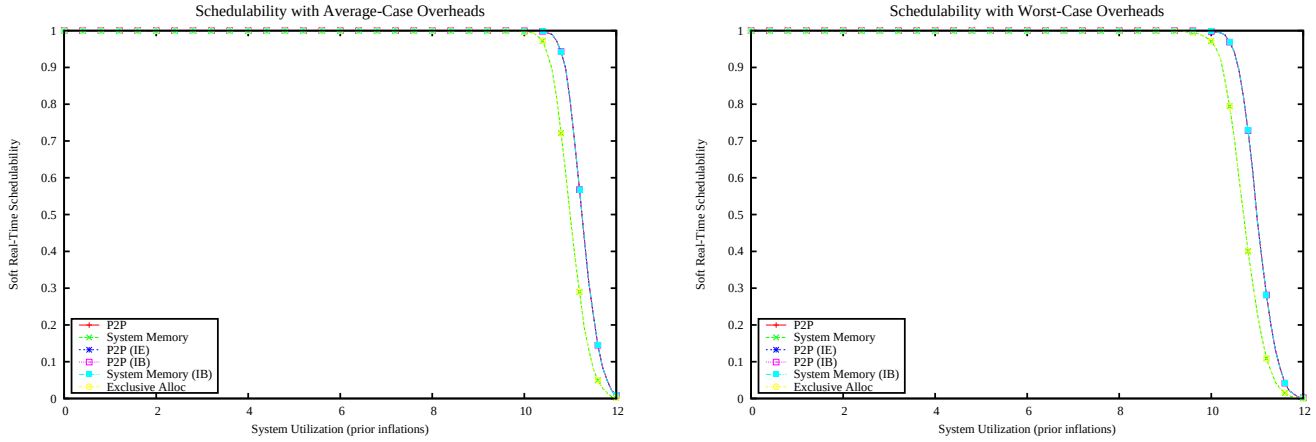

Figure 5389: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

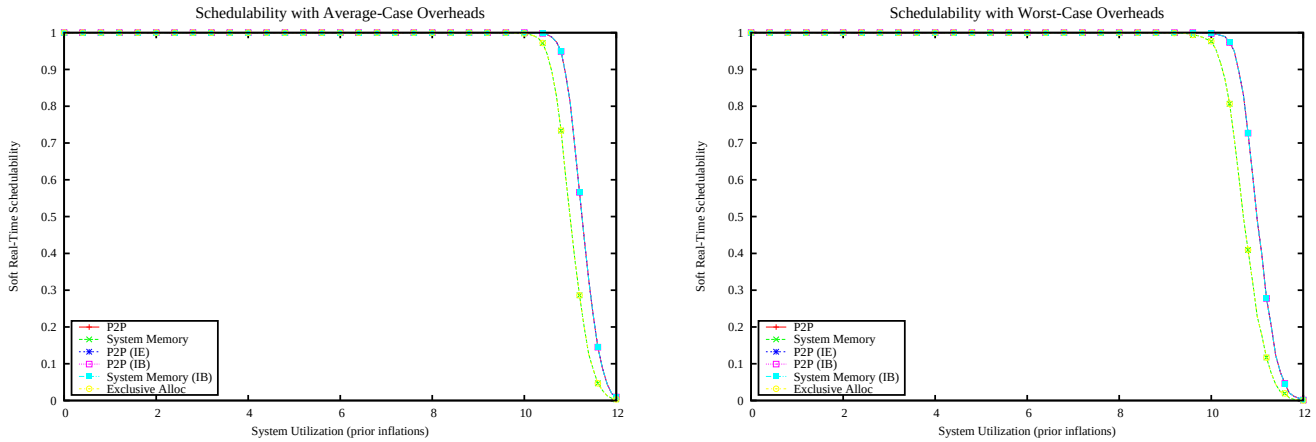

Figure 5390: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

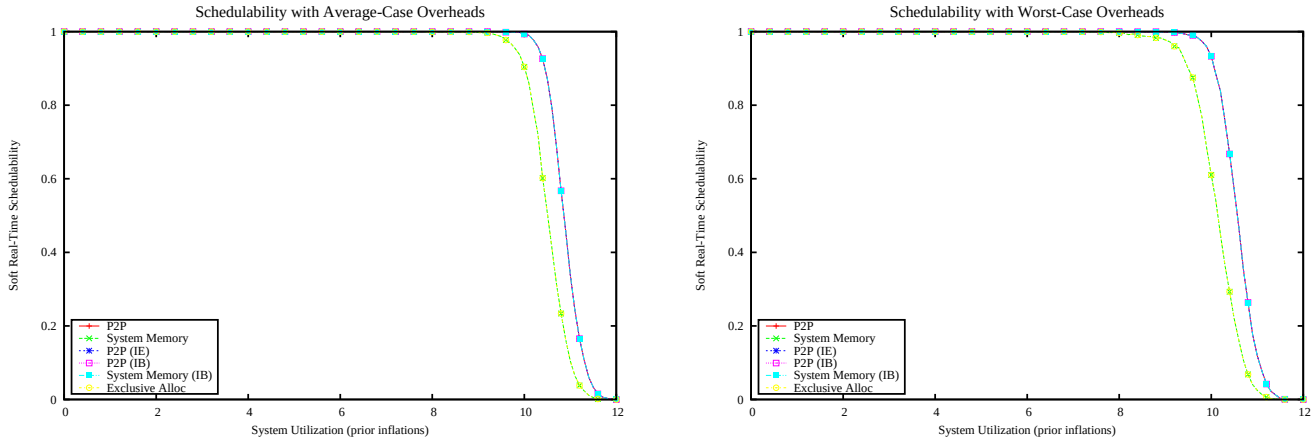

Figure 5391: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

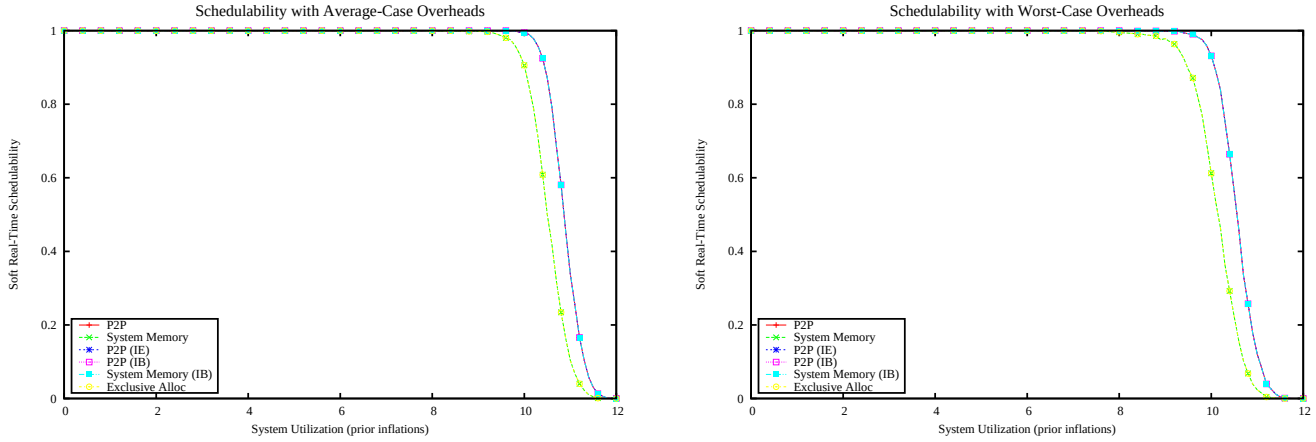

Figure 5392: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

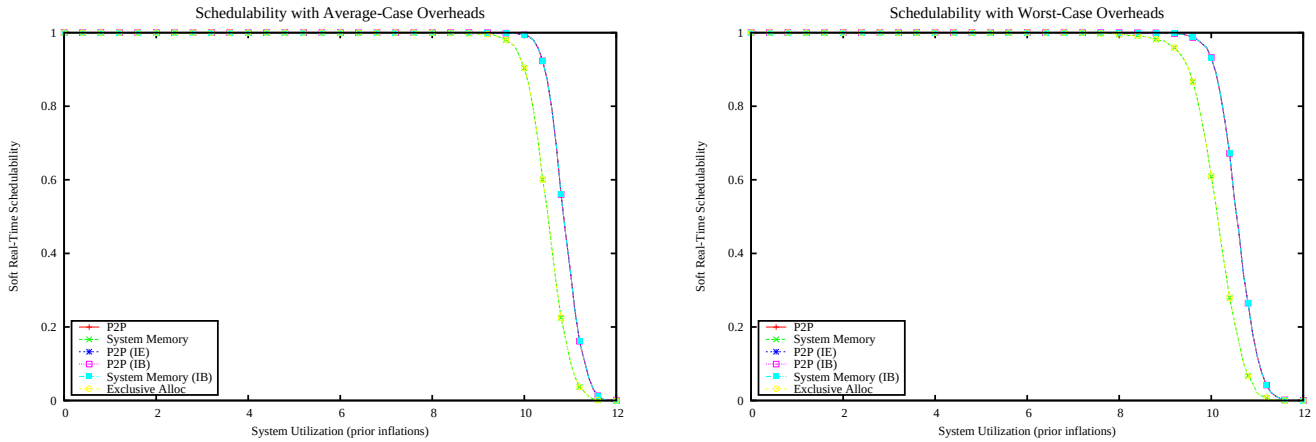

Figure 5393: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

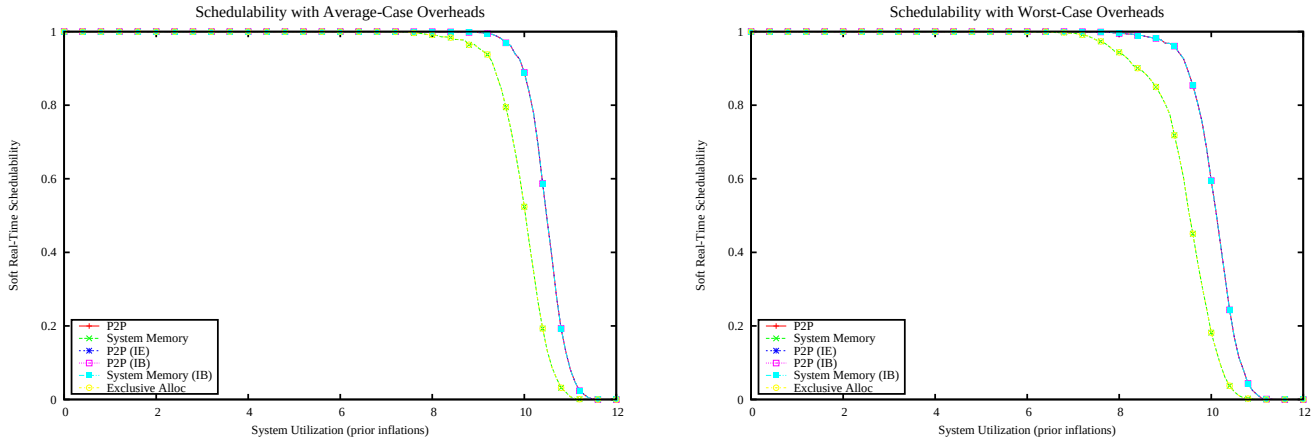

Figure 5394: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

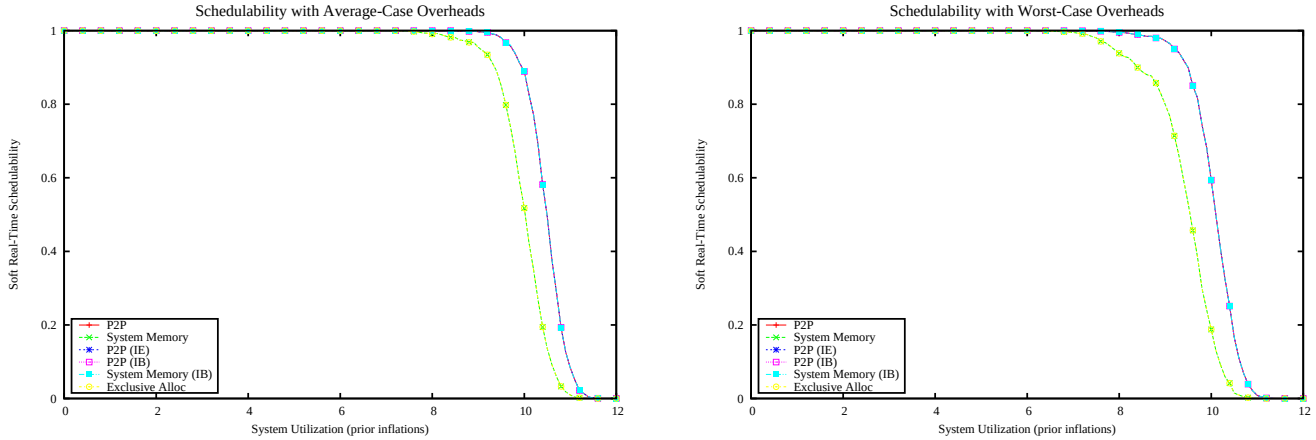

Figure 5395: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

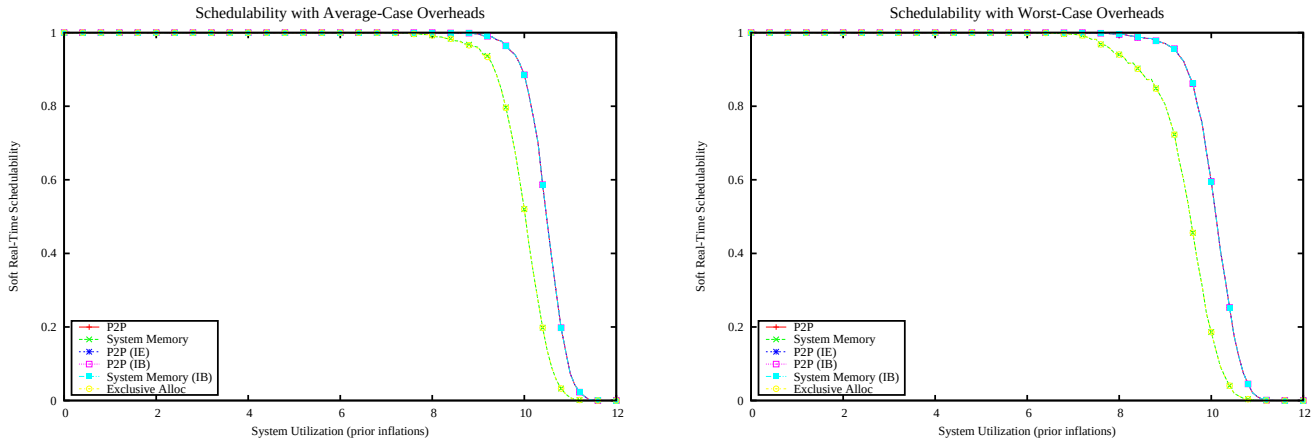

Figure 5396: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

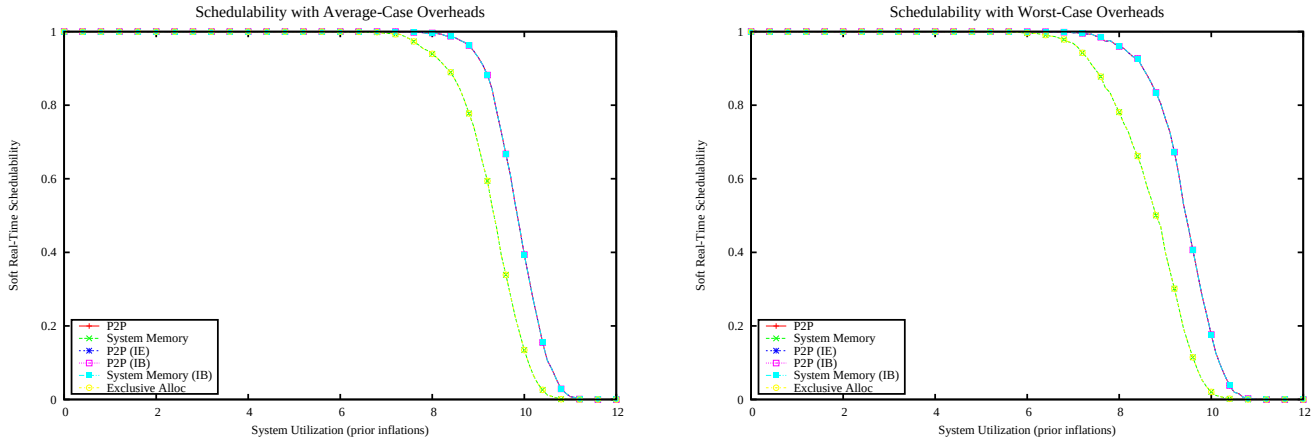

Figure 5397: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

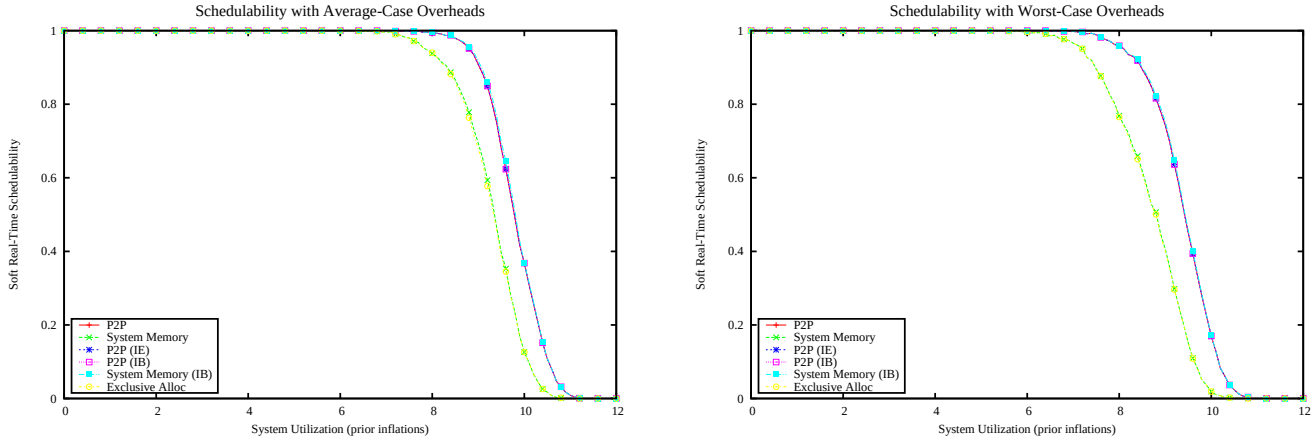

Figure 5398: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

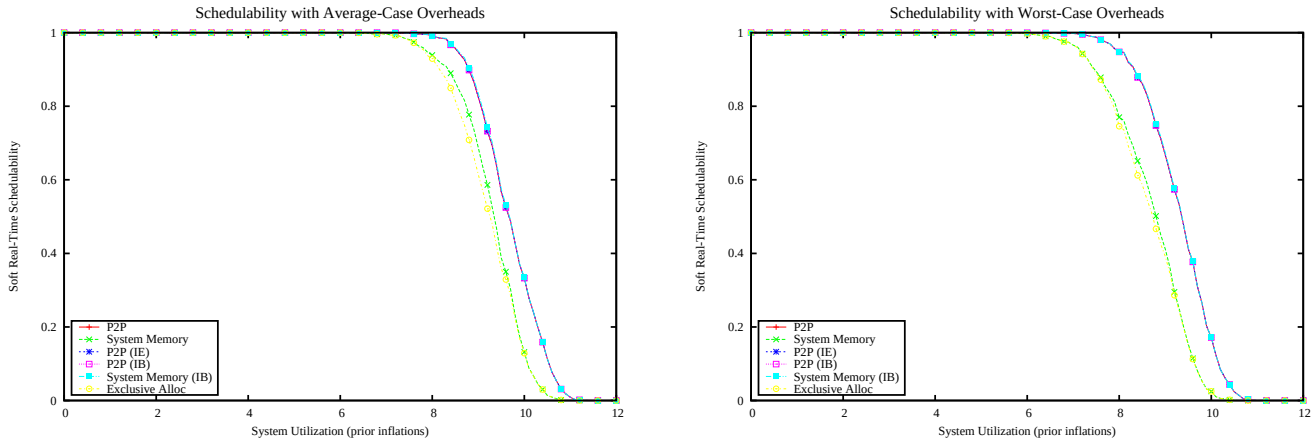

Figure 5399: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

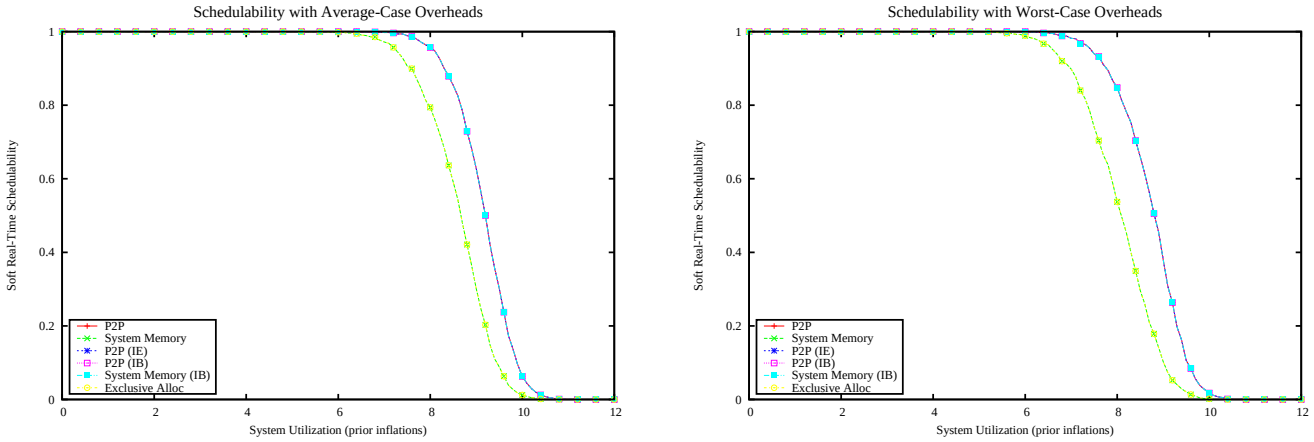

Figure 5400: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

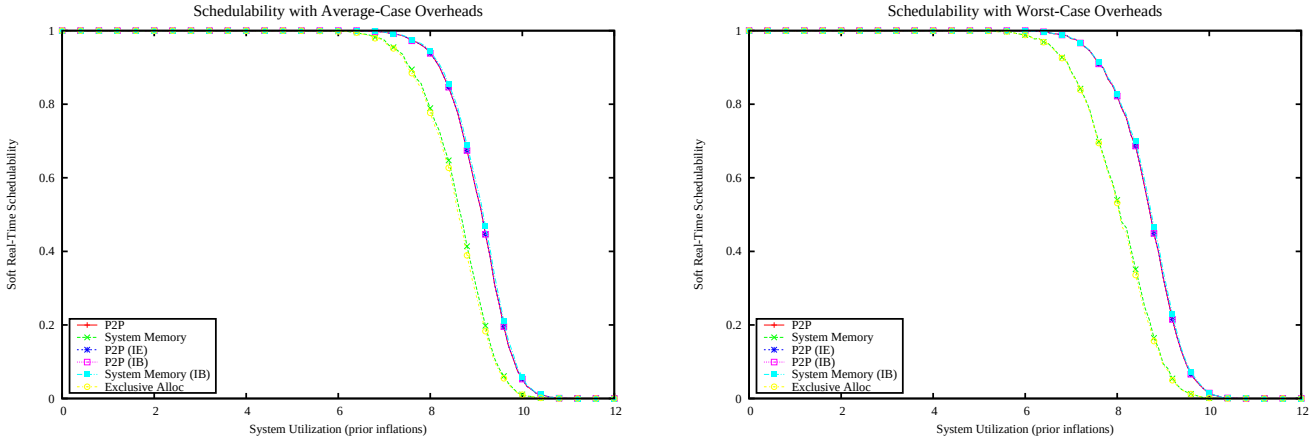

Figure 5401: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

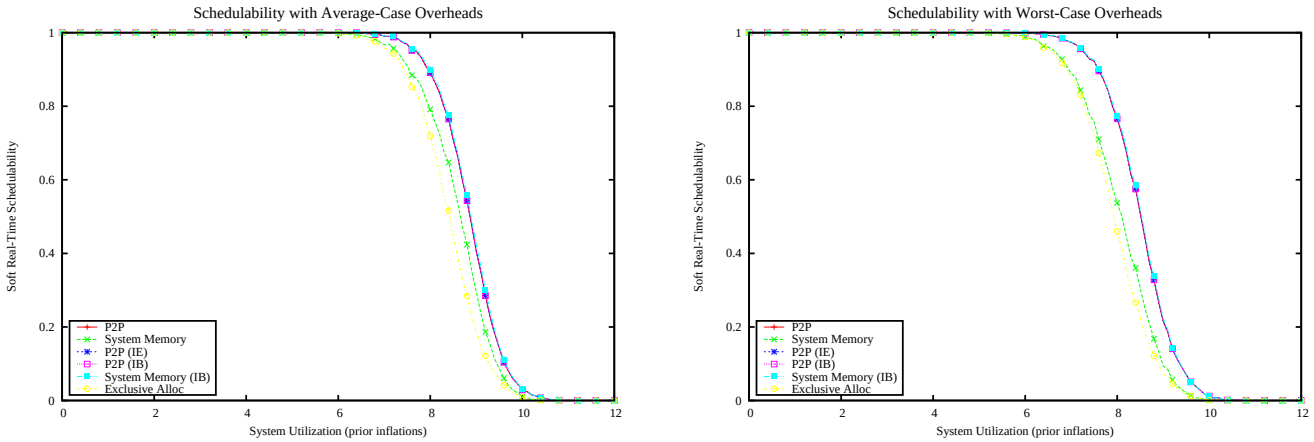

Figure 5402: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

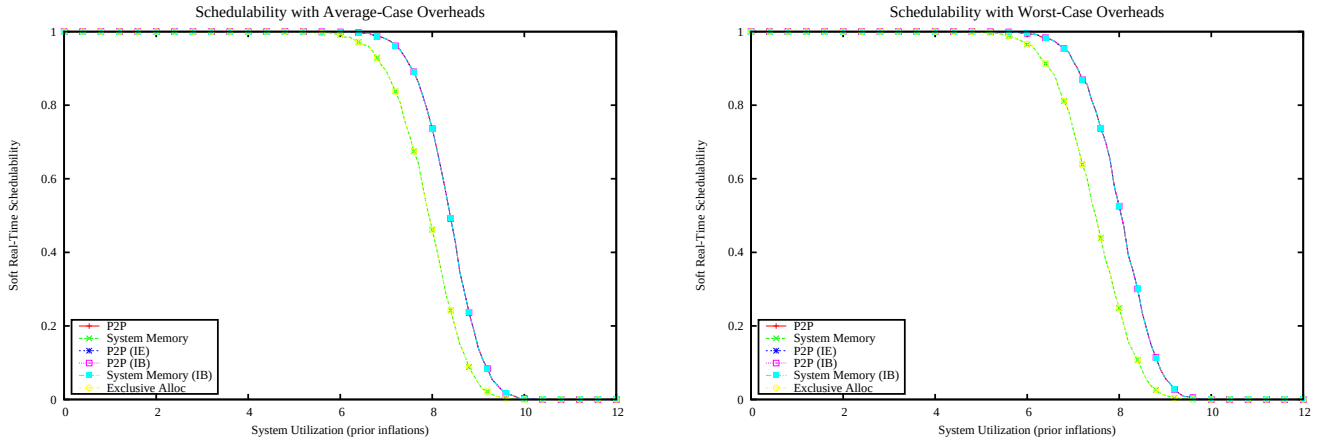

Figure 5403: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

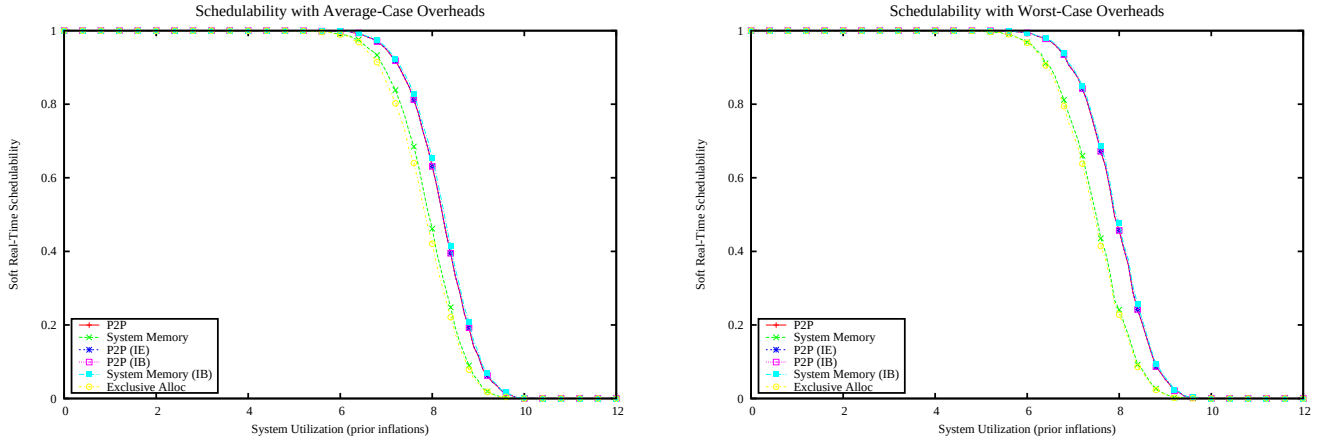

Figure 5404: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

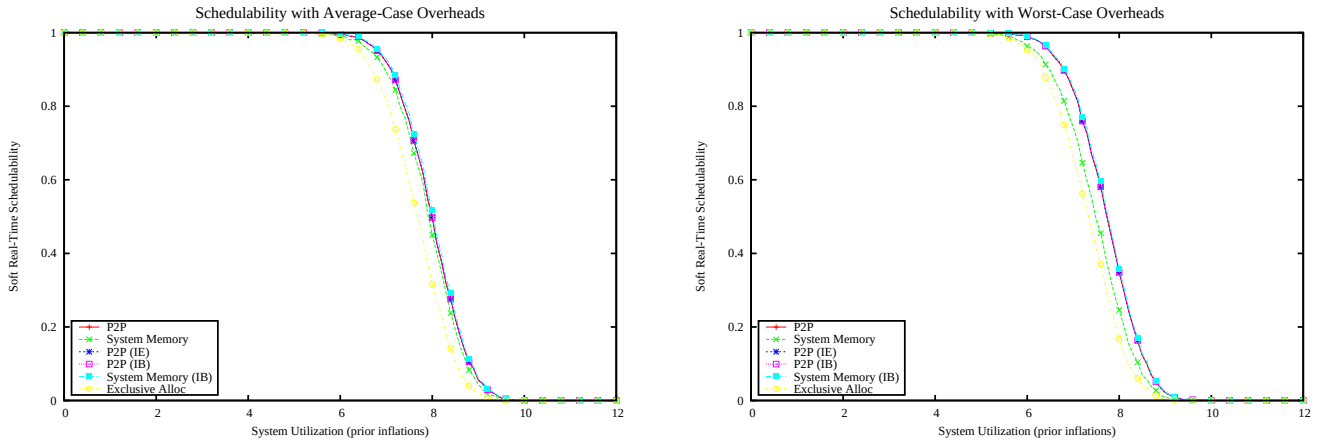

Figure 5405: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

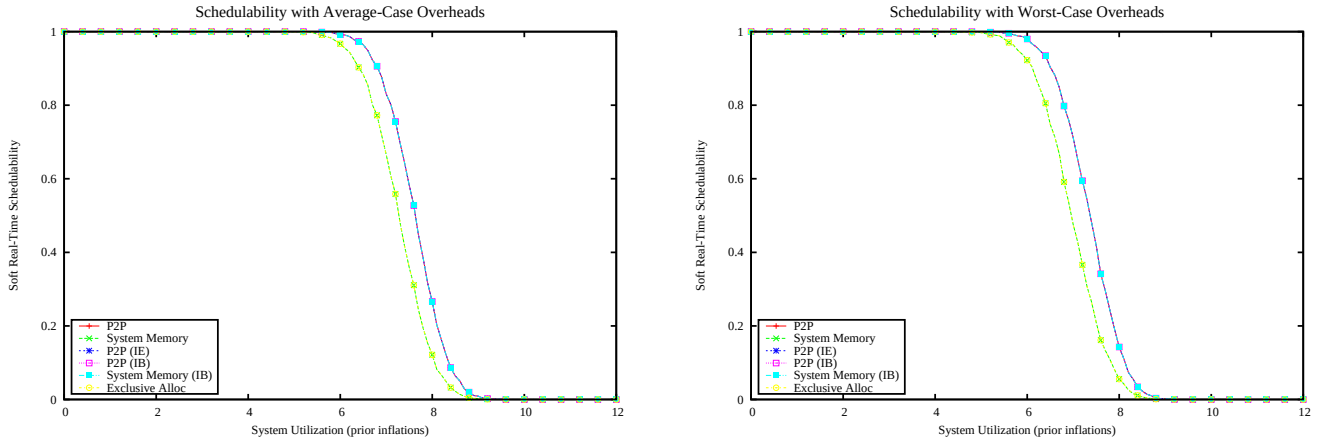

Figure 5406: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

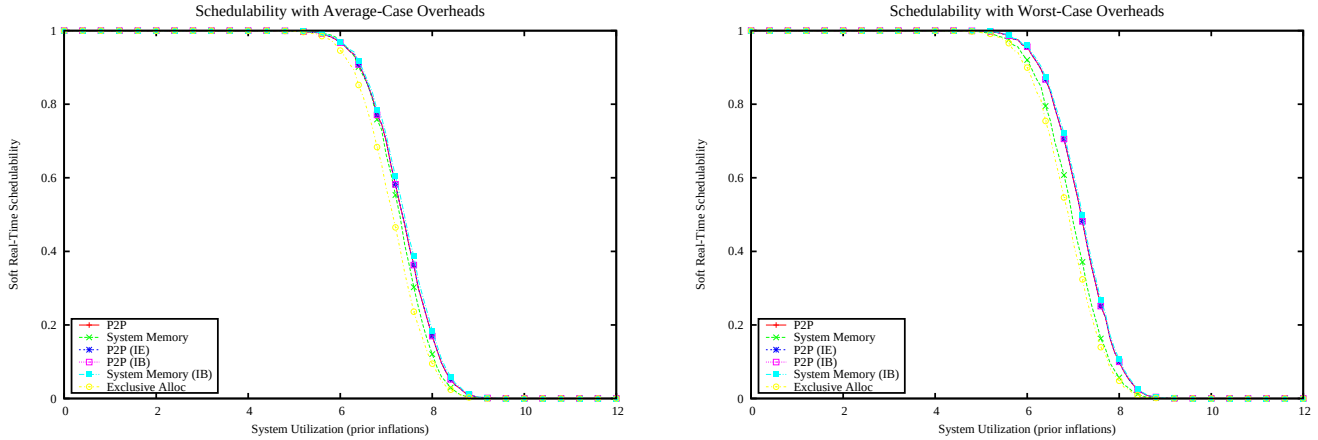

Figure 5407: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

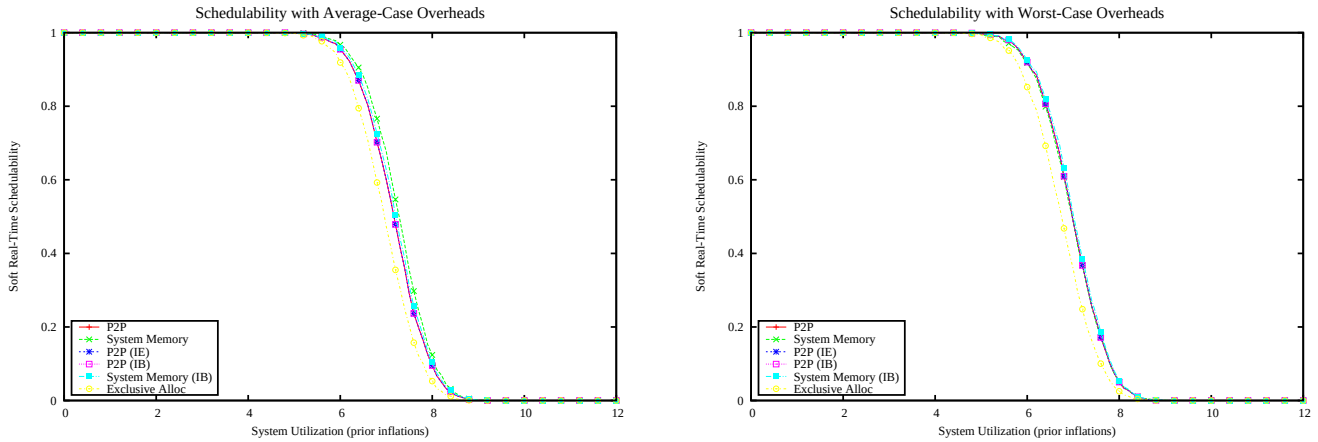

Figure 5408: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

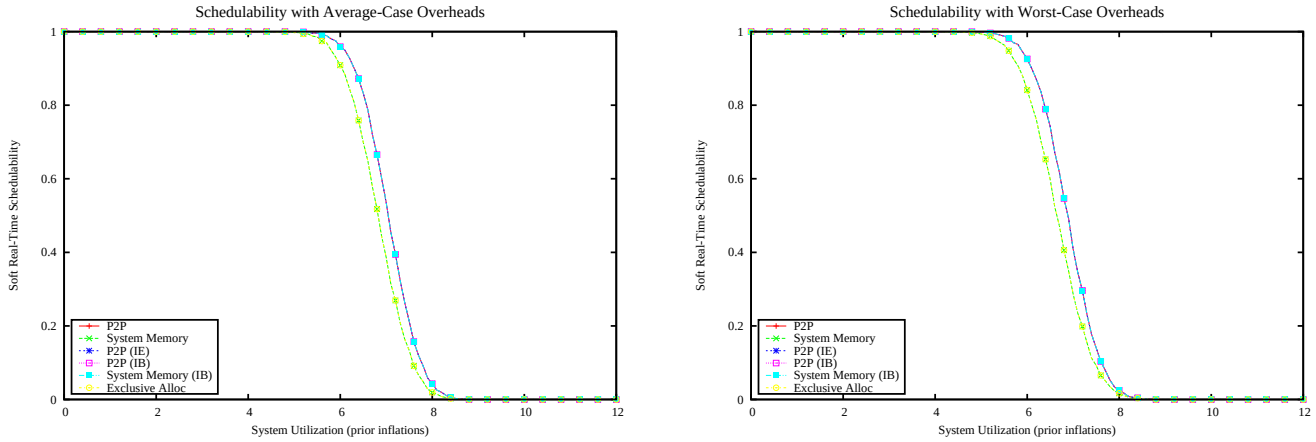

Figure 5409: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

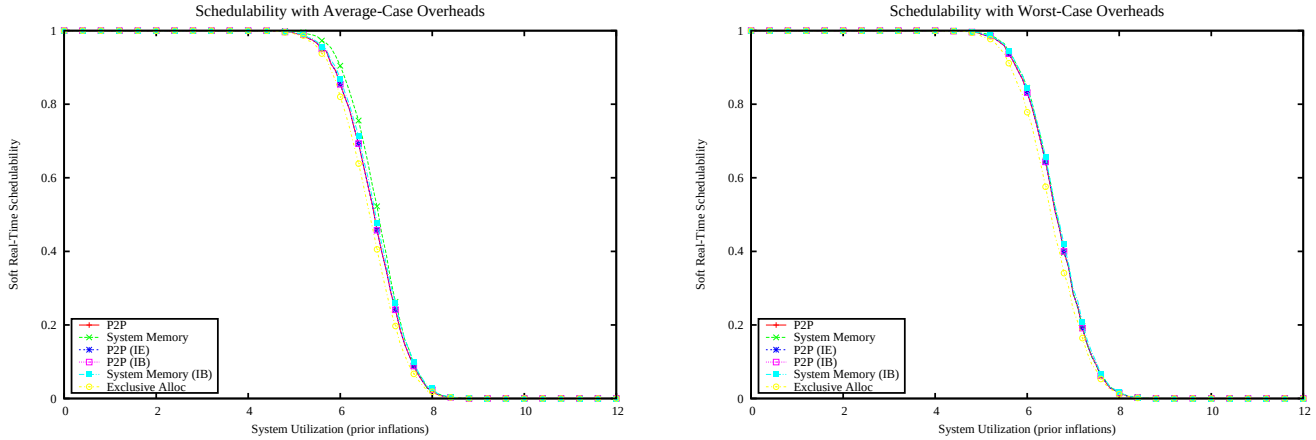

Figure 5410: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

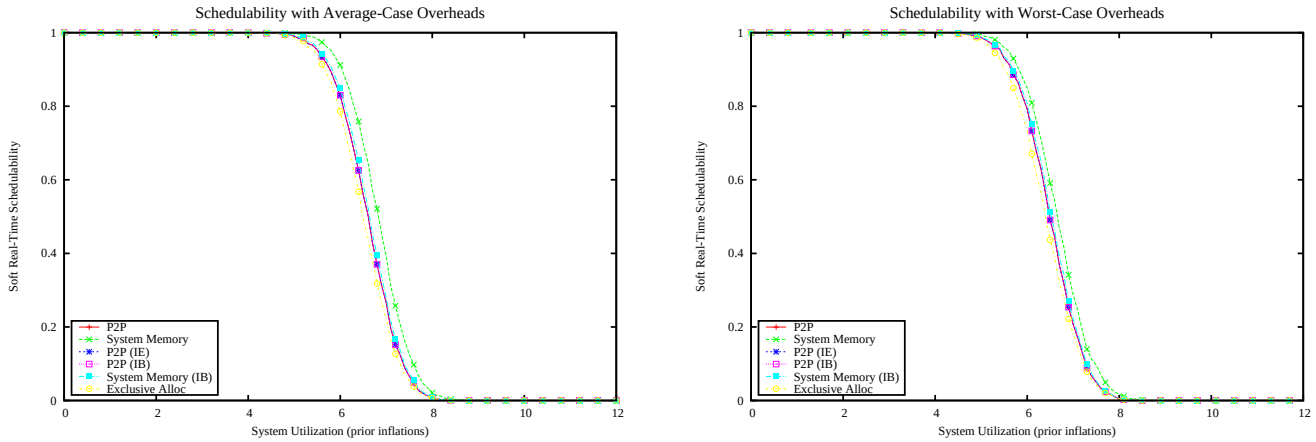

Figure 5411: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

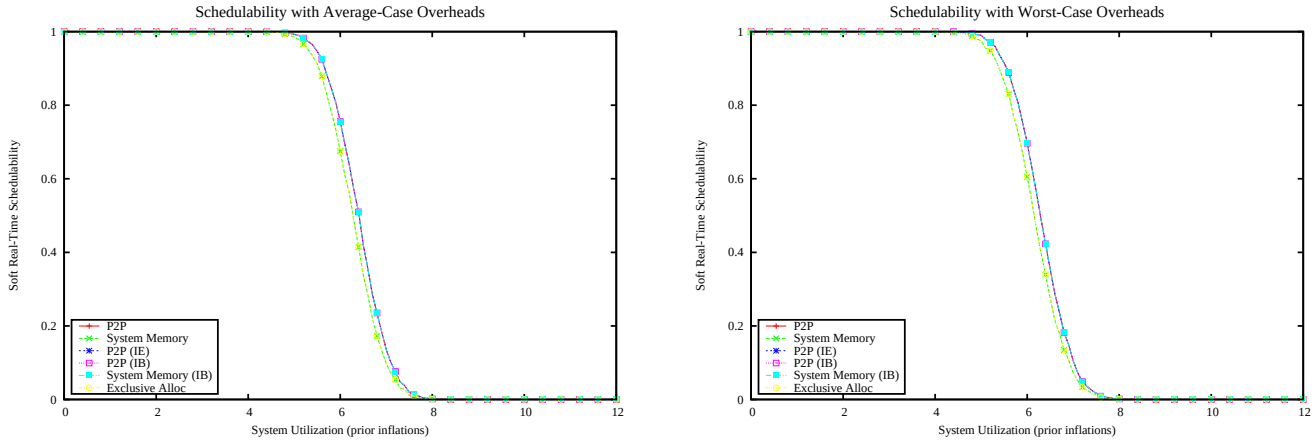

Figure 5412: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

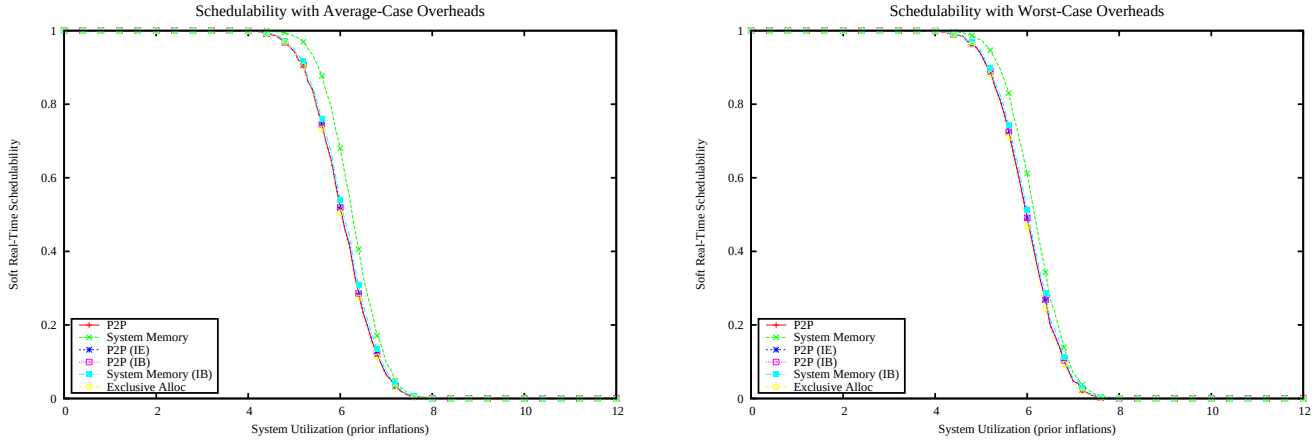

Figure 5413: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

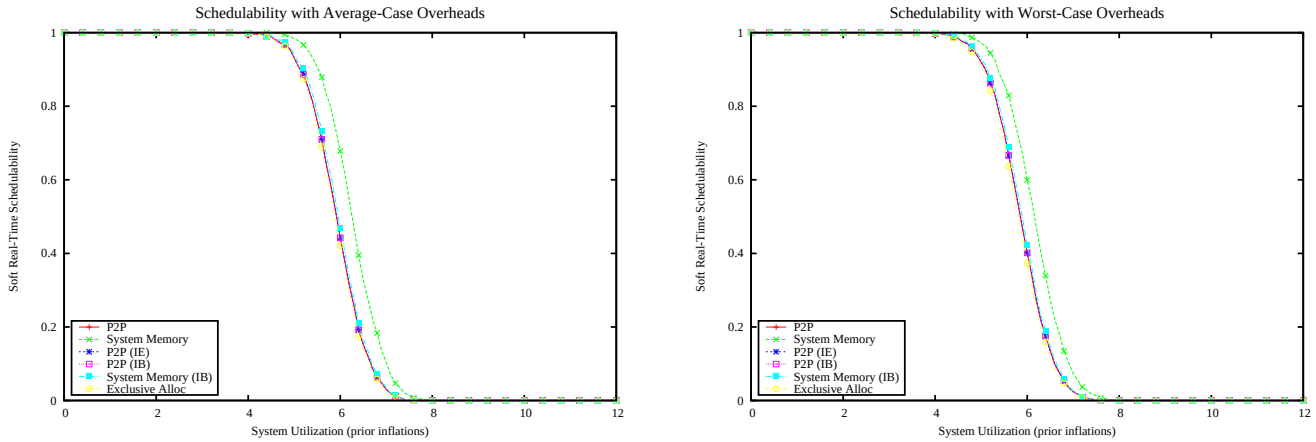

Figure 5414: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

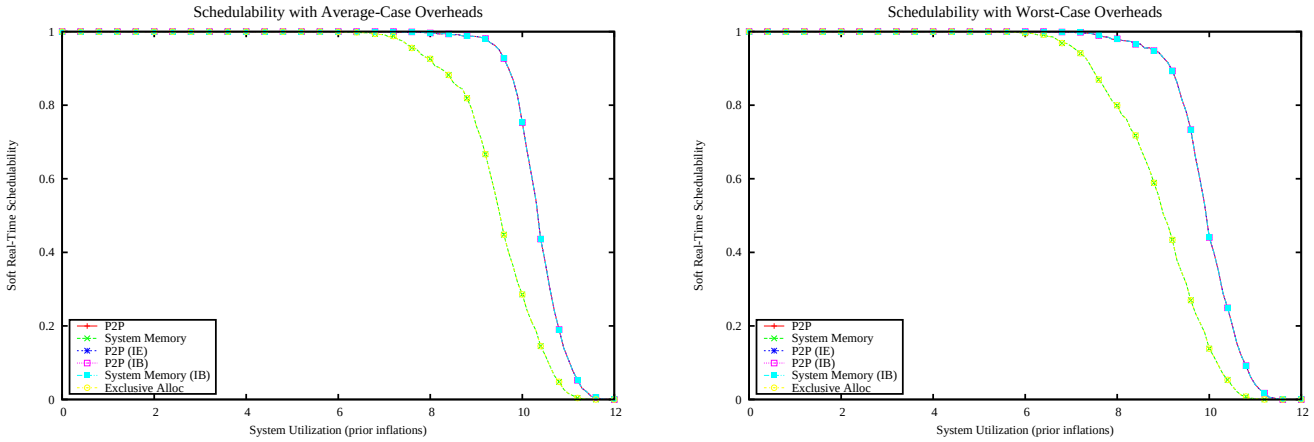

Figure 5415: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

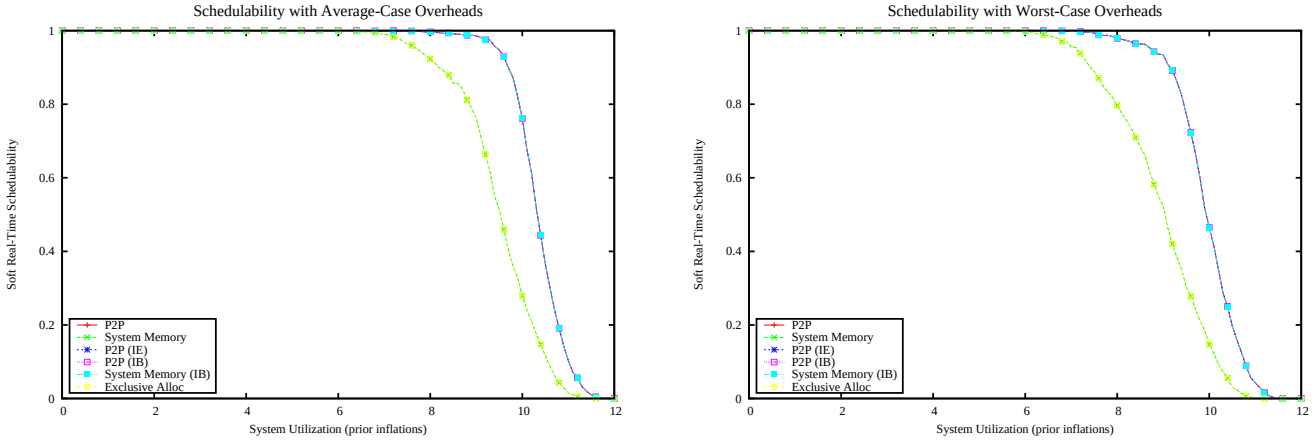

Figure 5416: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

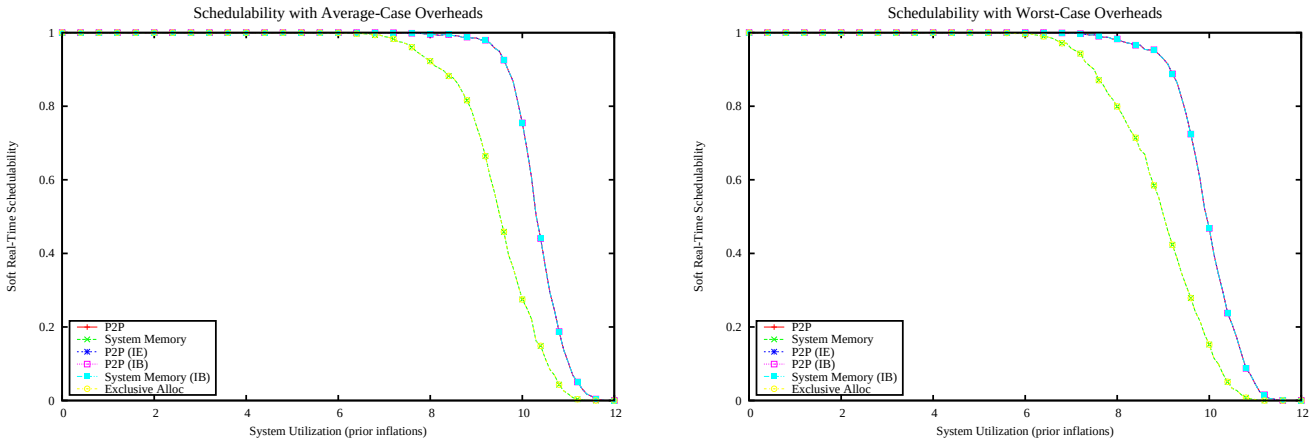

Figure 5417: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

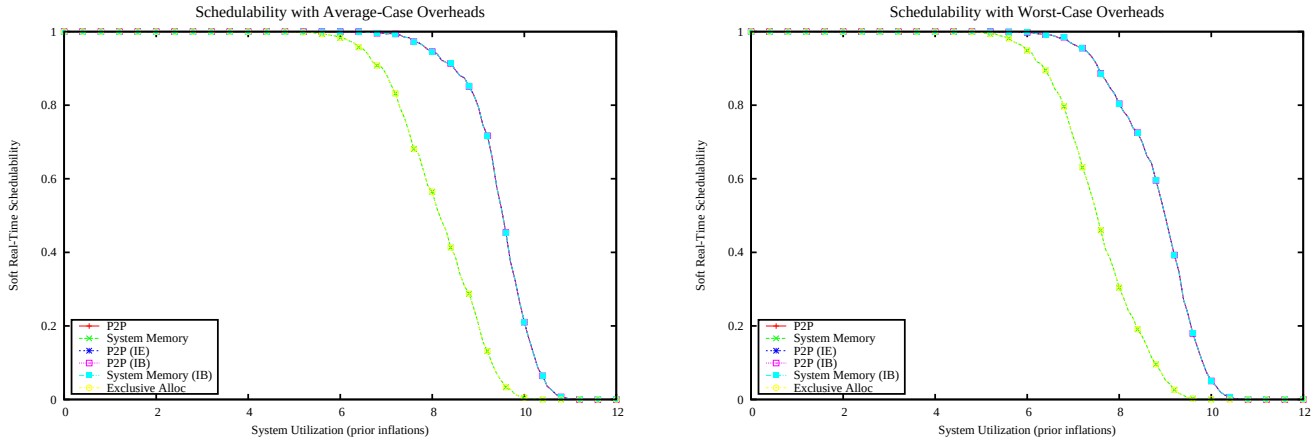

Figure 5418: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

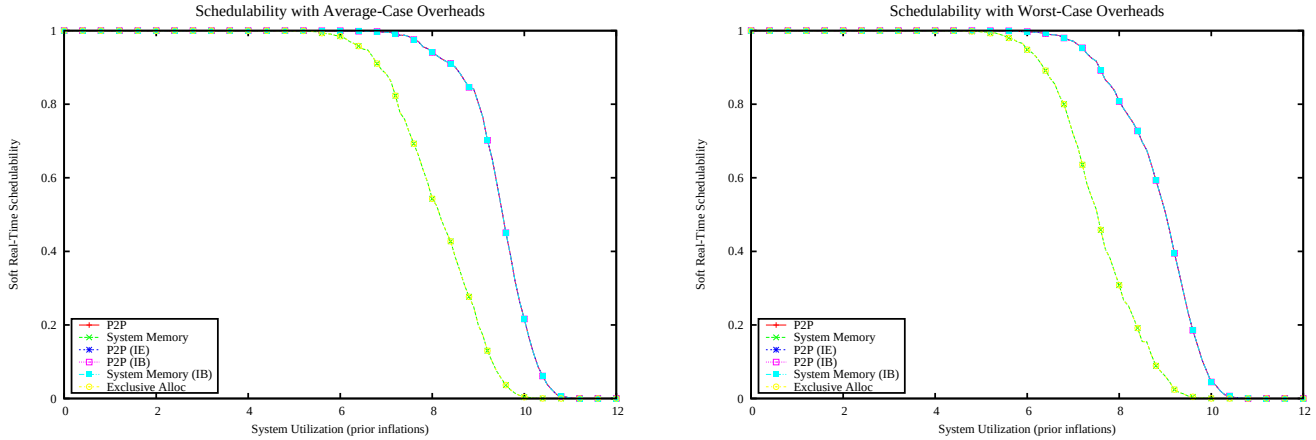

Figure 5419: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

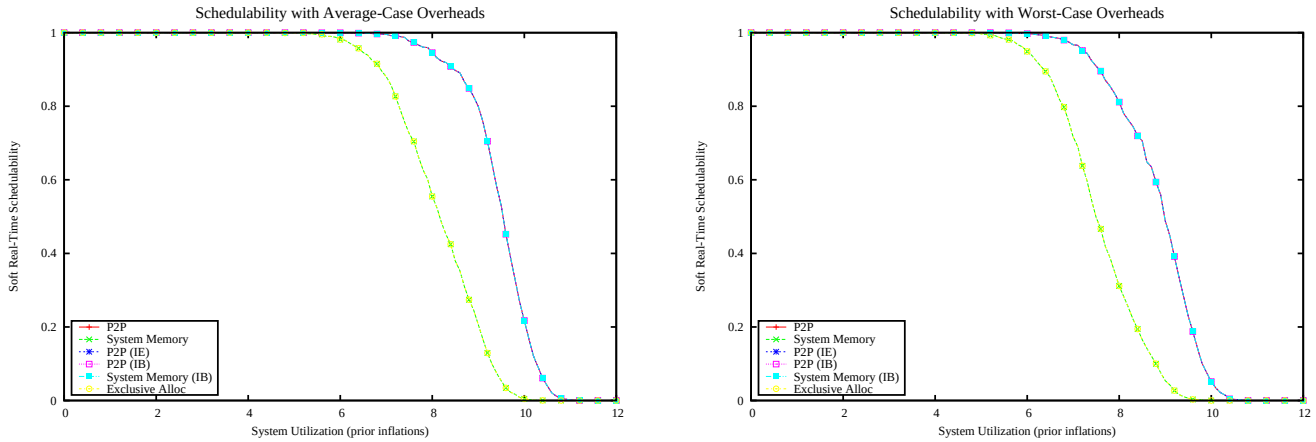

Figure 5420: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

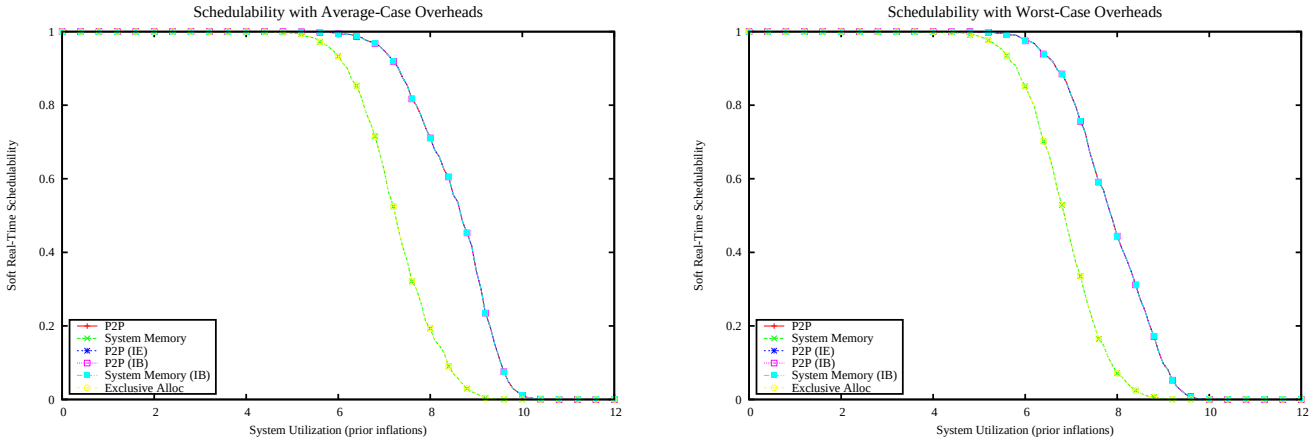

Figure 5421: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

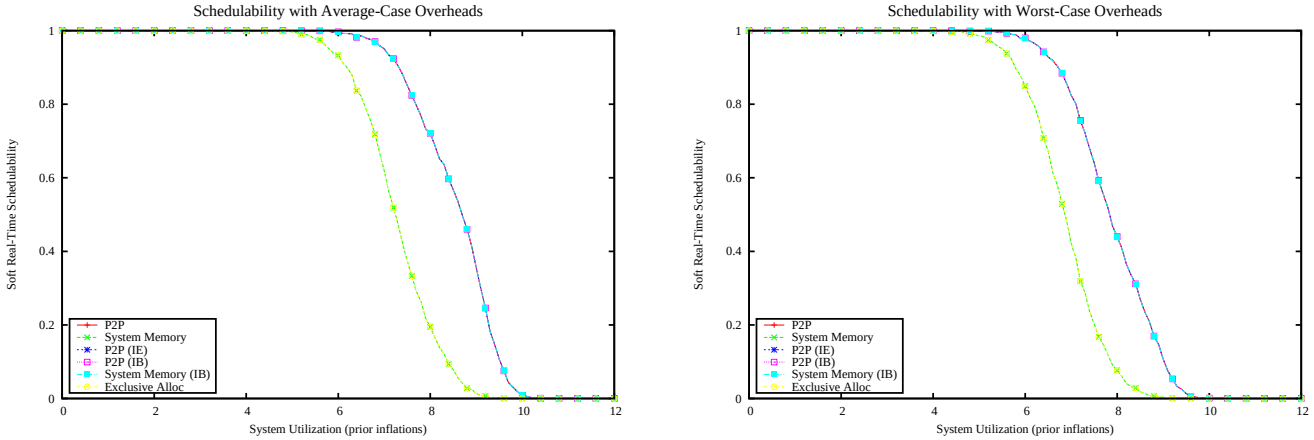

Figure 5422: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

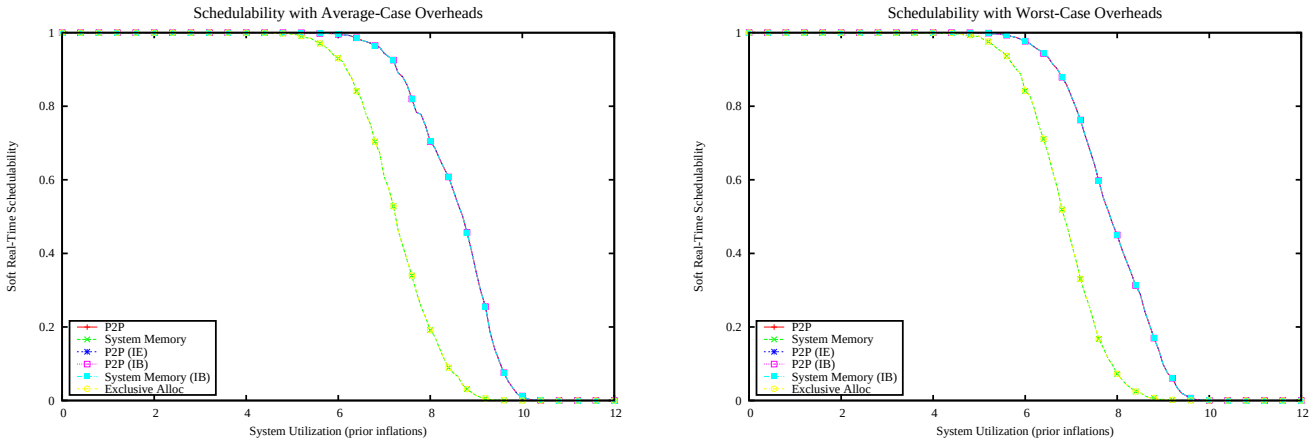

Figure 5423: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

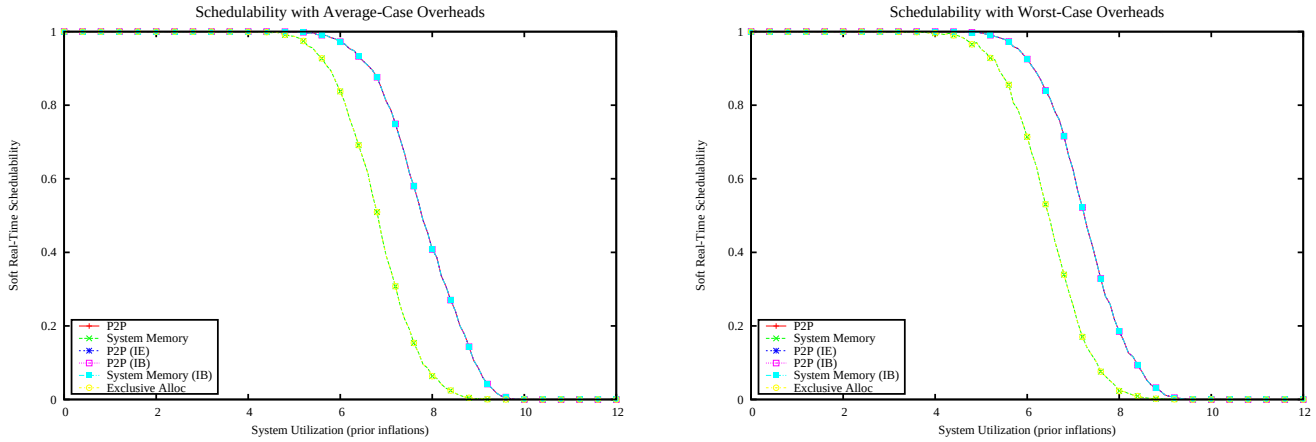

Figure 5424: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

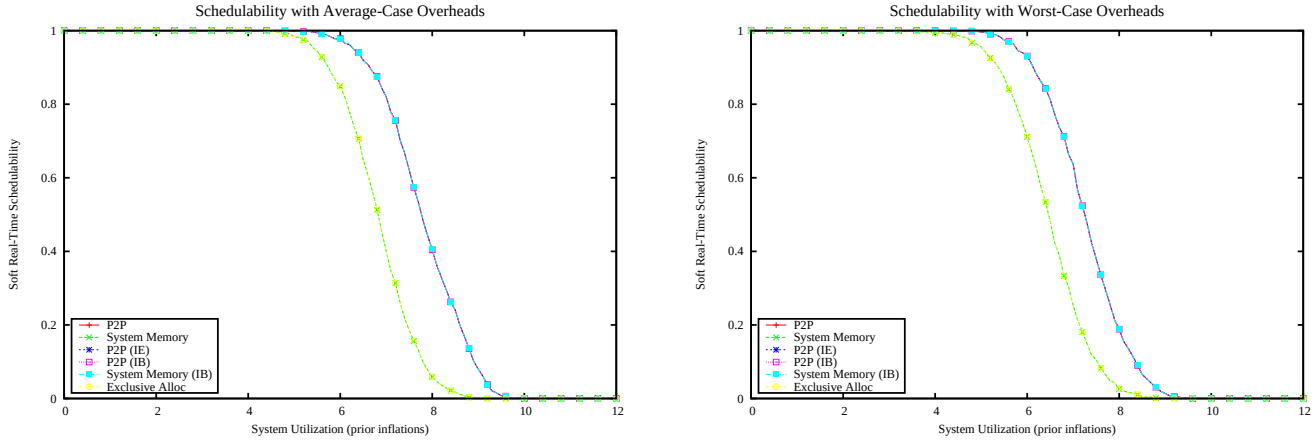

Figure 5425: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

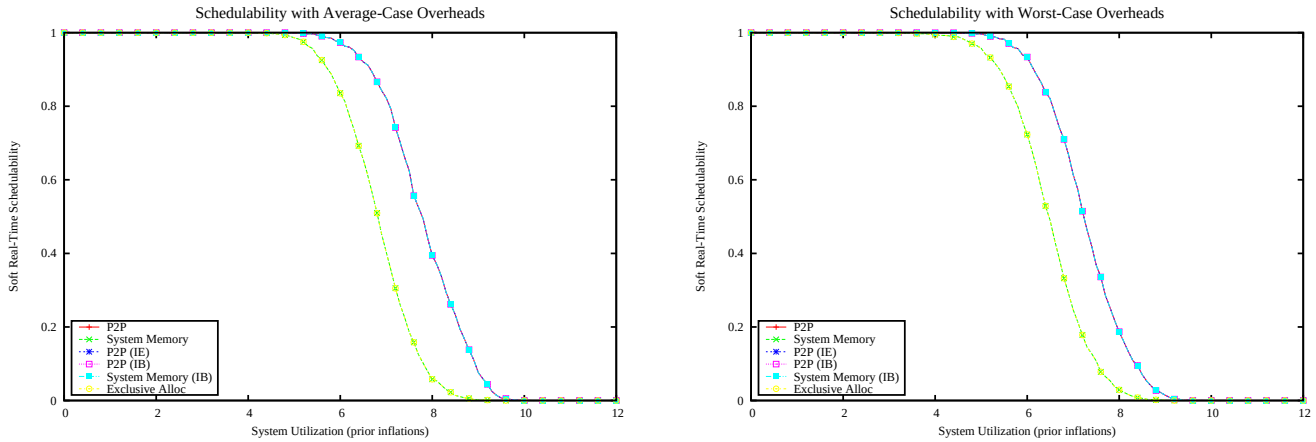

Figure 5426: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

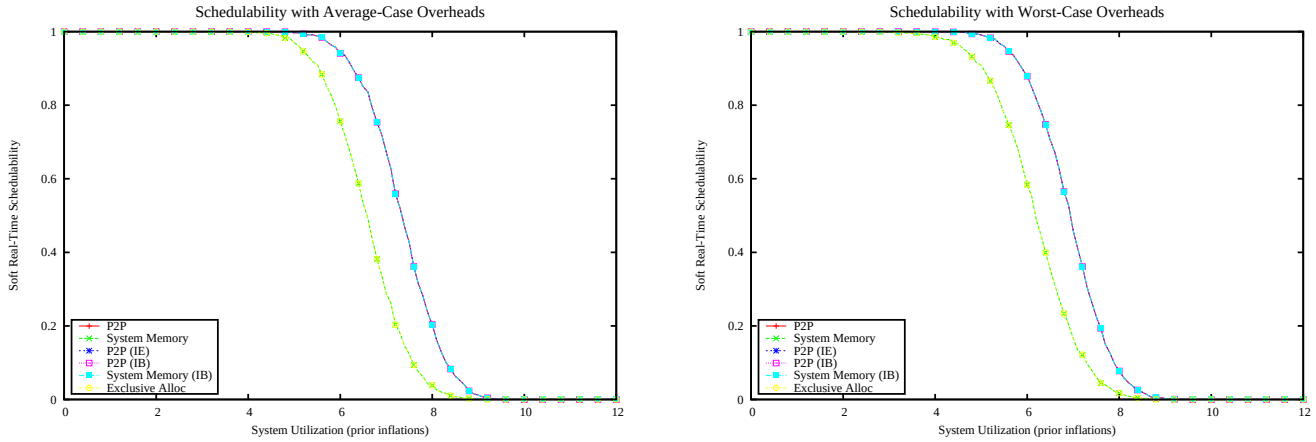

Figure 5427: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

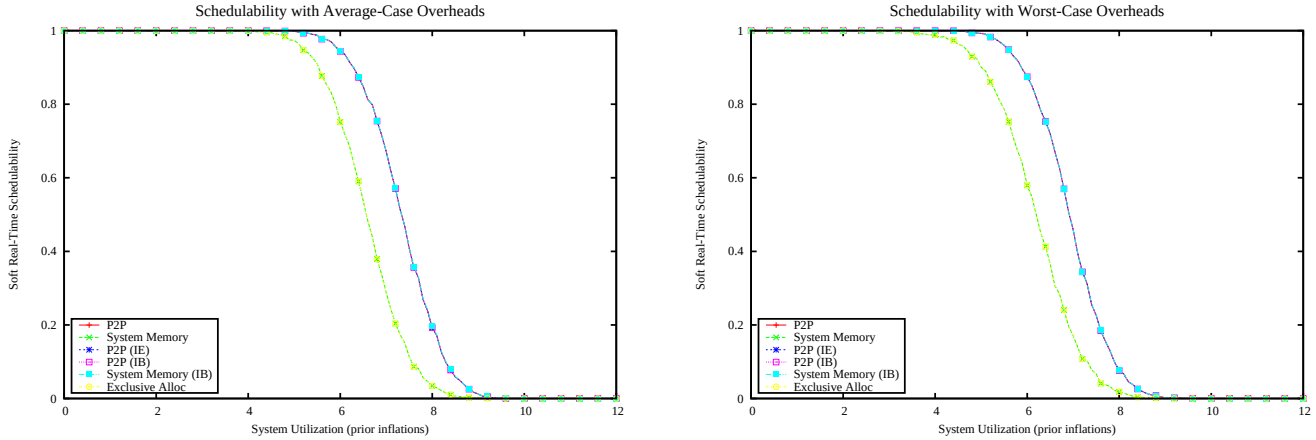

Figure 5428: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

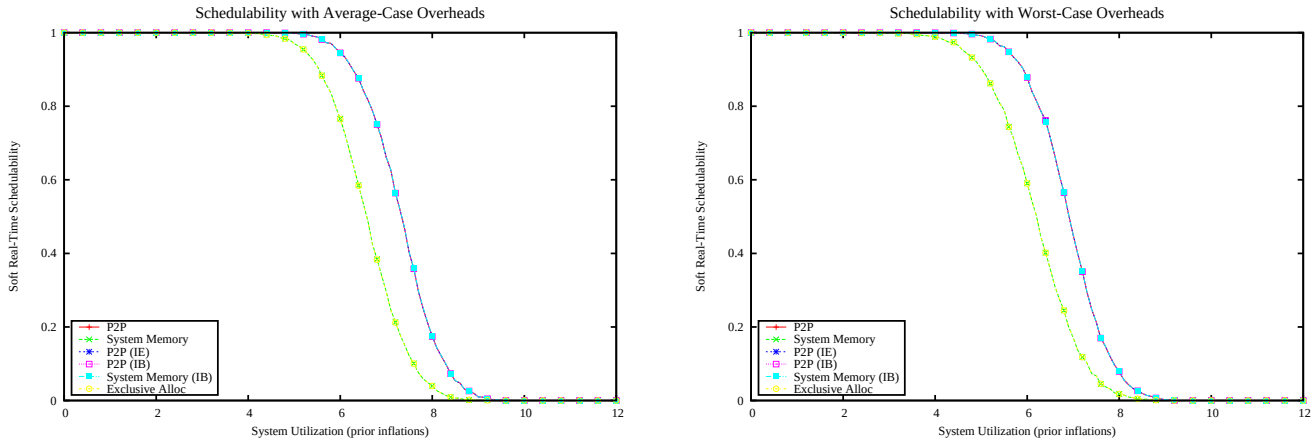

Figure 5429: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

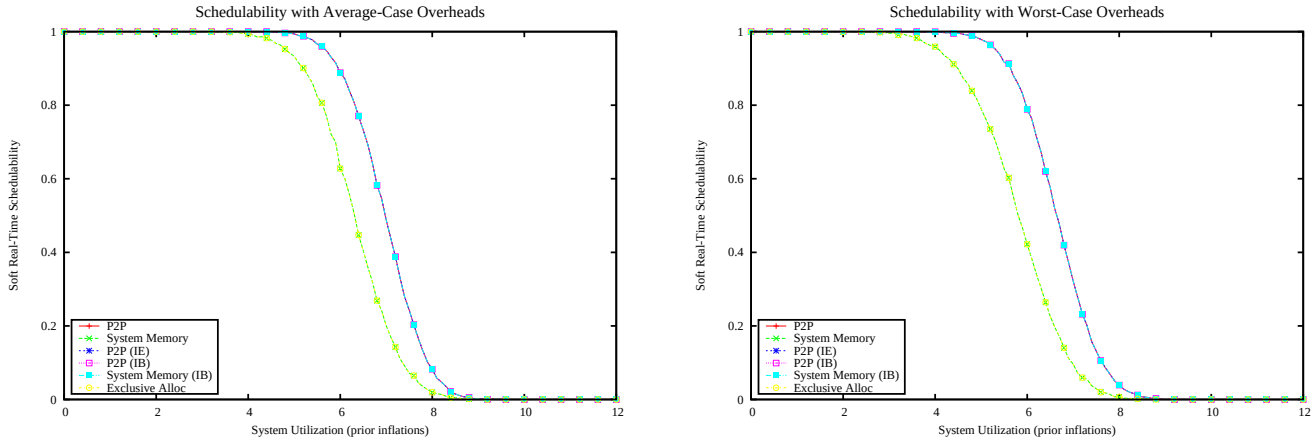

Figure 5430: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

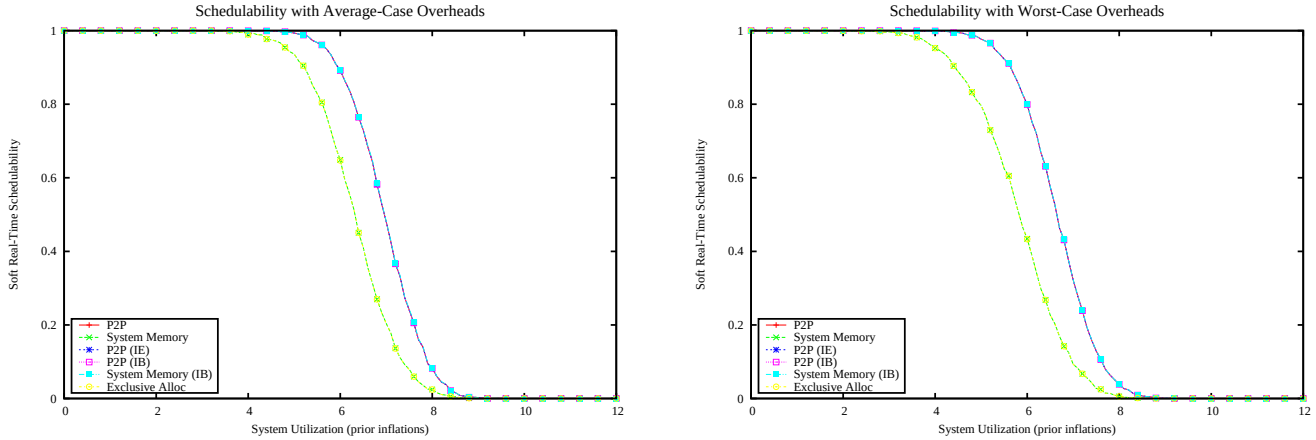

Figure 5431: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

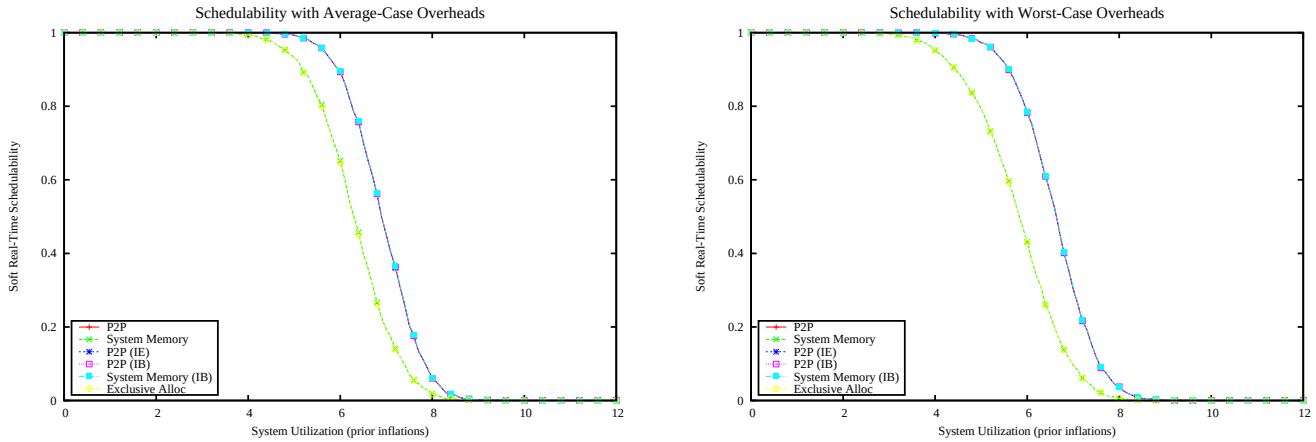

Figure 5432: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

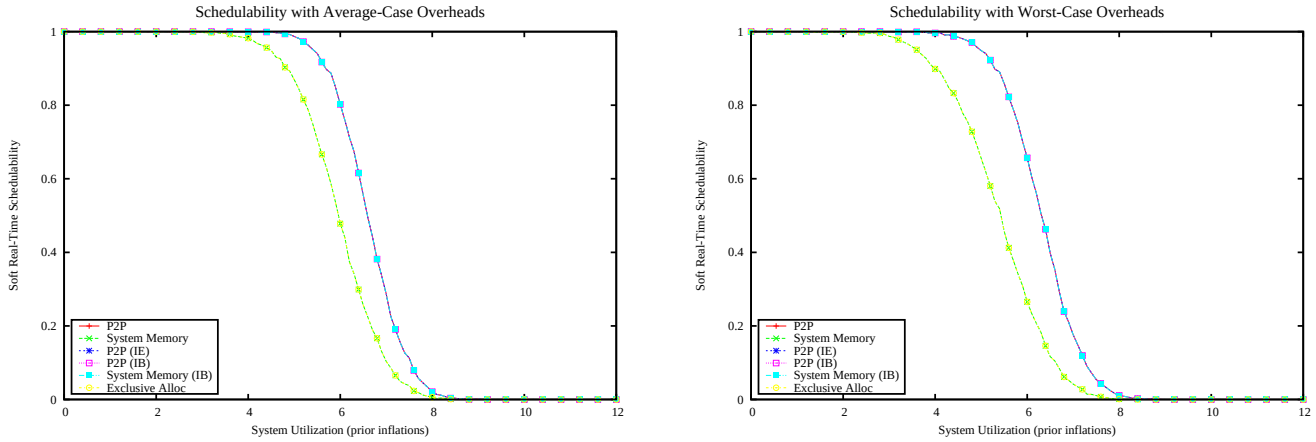

Figure 5433: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

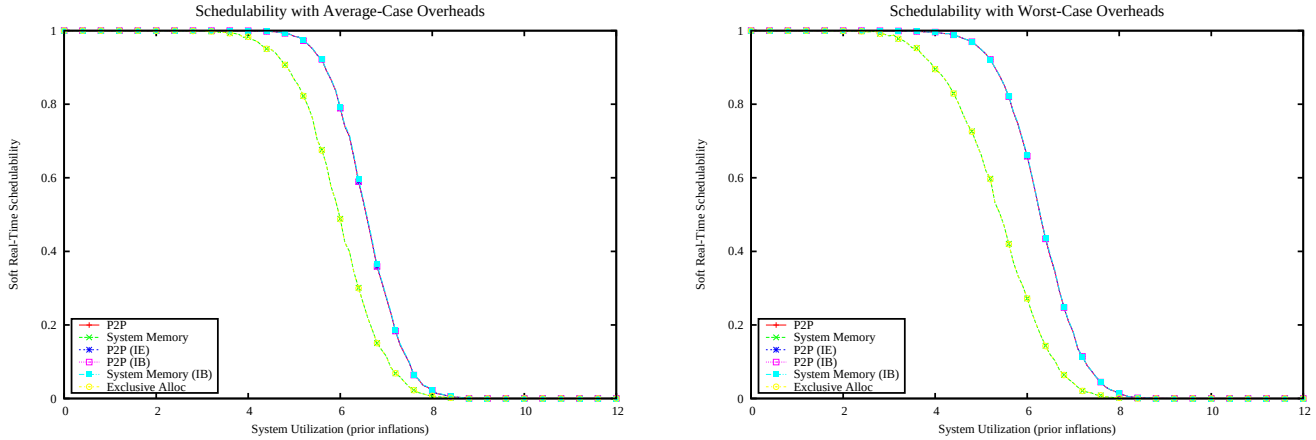

Figure 5434: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

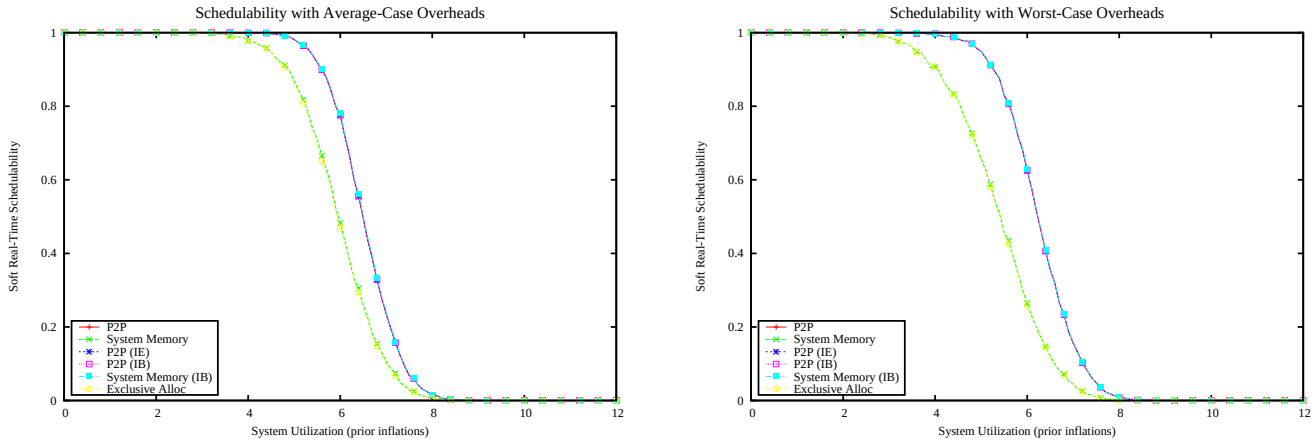

Figure 5435: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

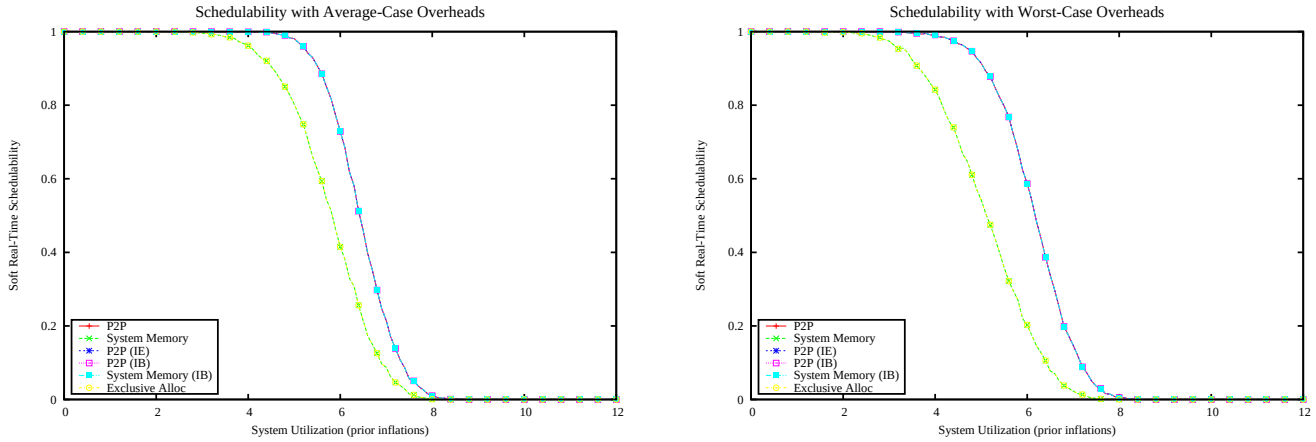

Figure 5436: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

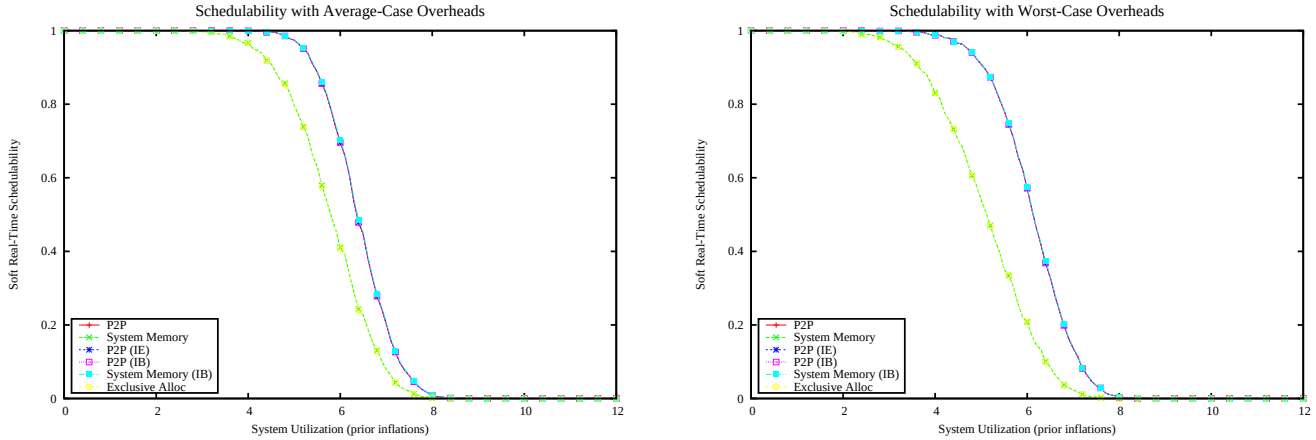

Figure 5437: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

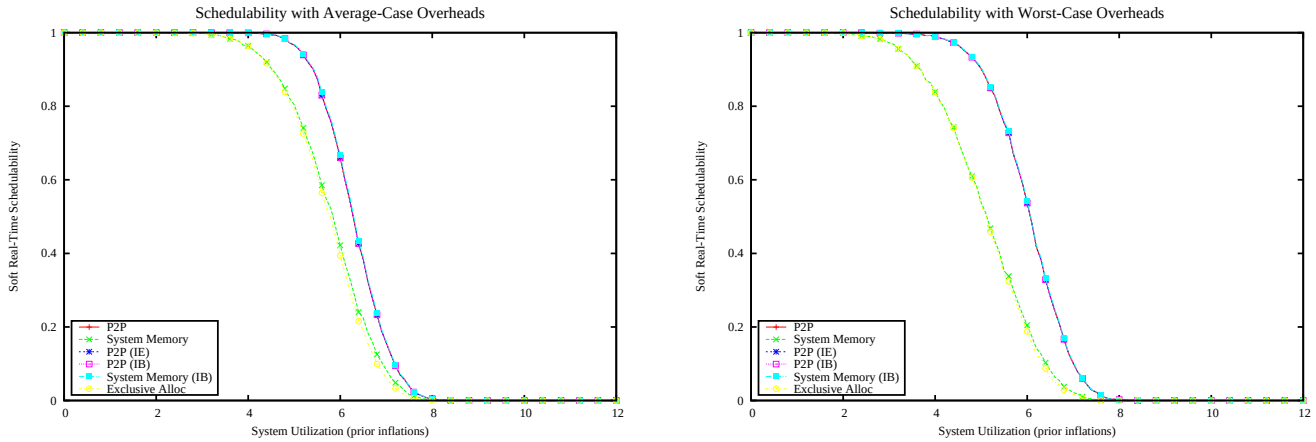

Figure 5438: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

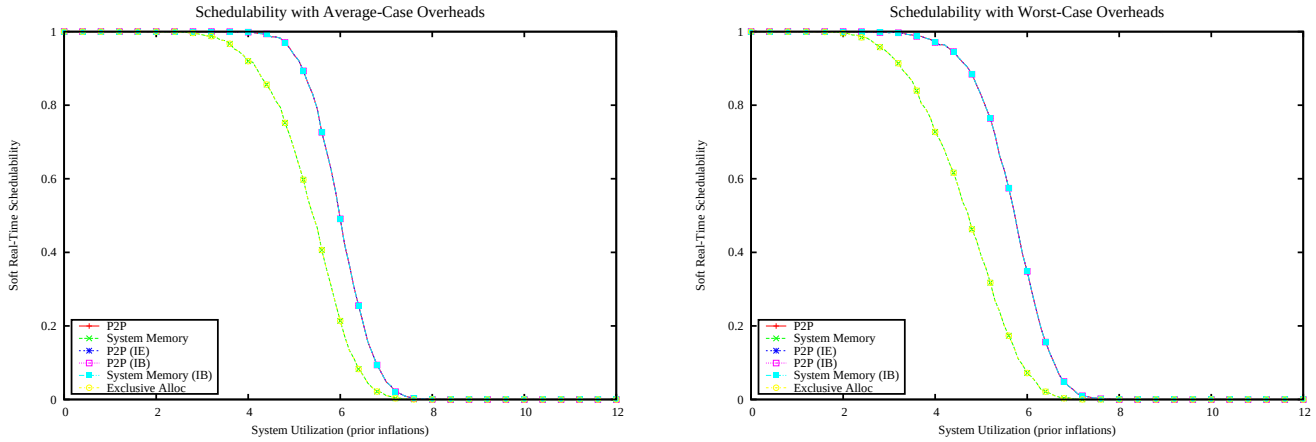

Figure 5439: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

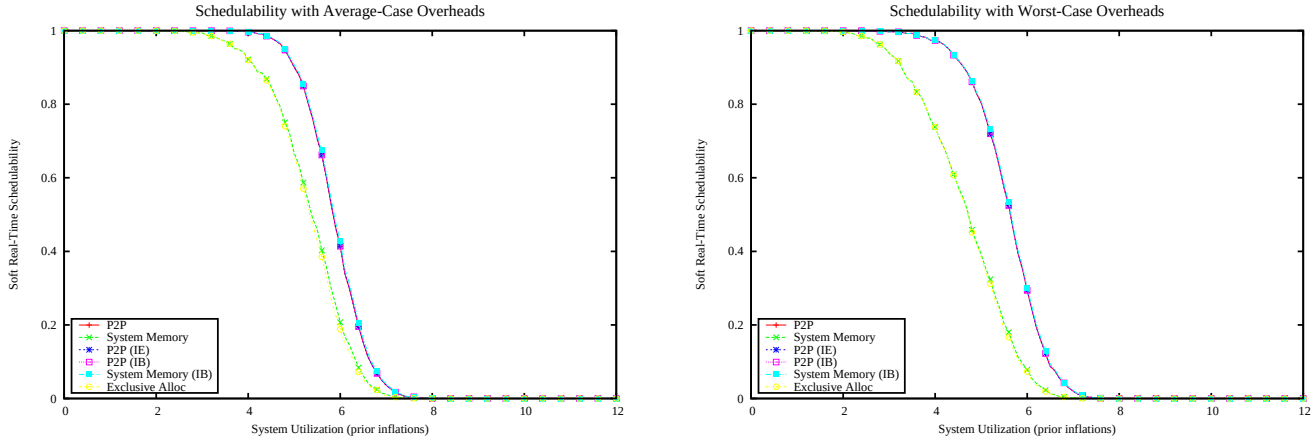

Figure 5440: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

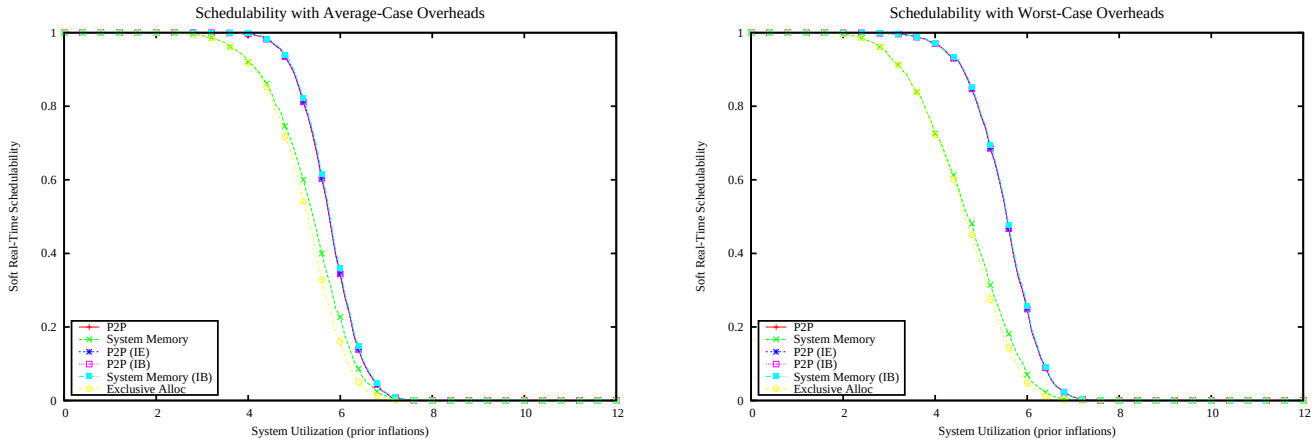

Figure 5441: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

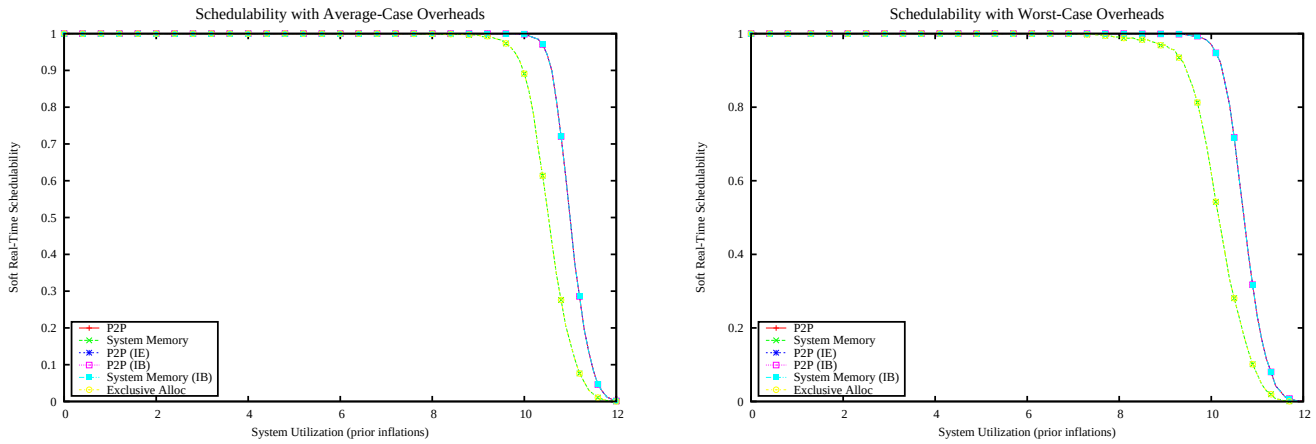

Figure 5442: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

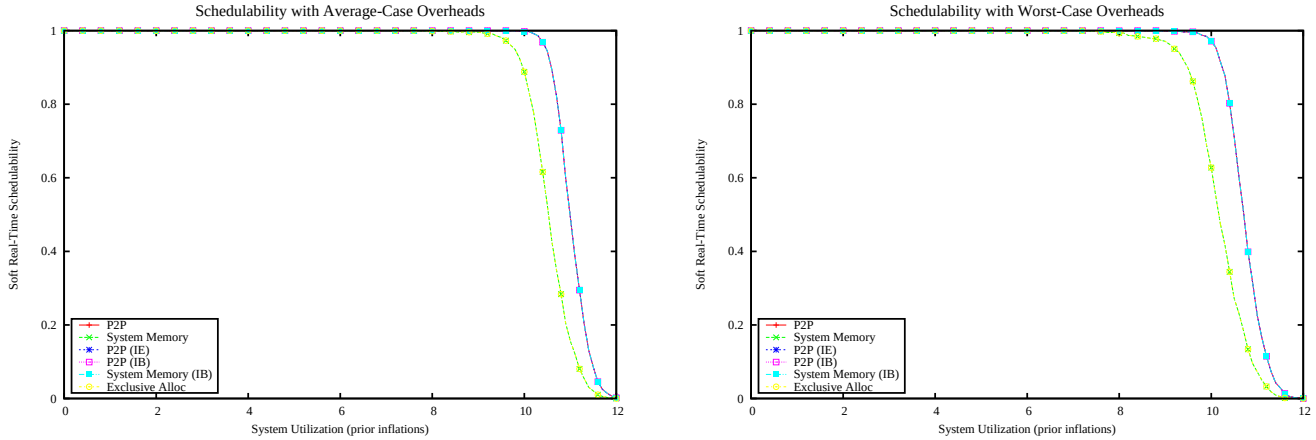

Figure 5443: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

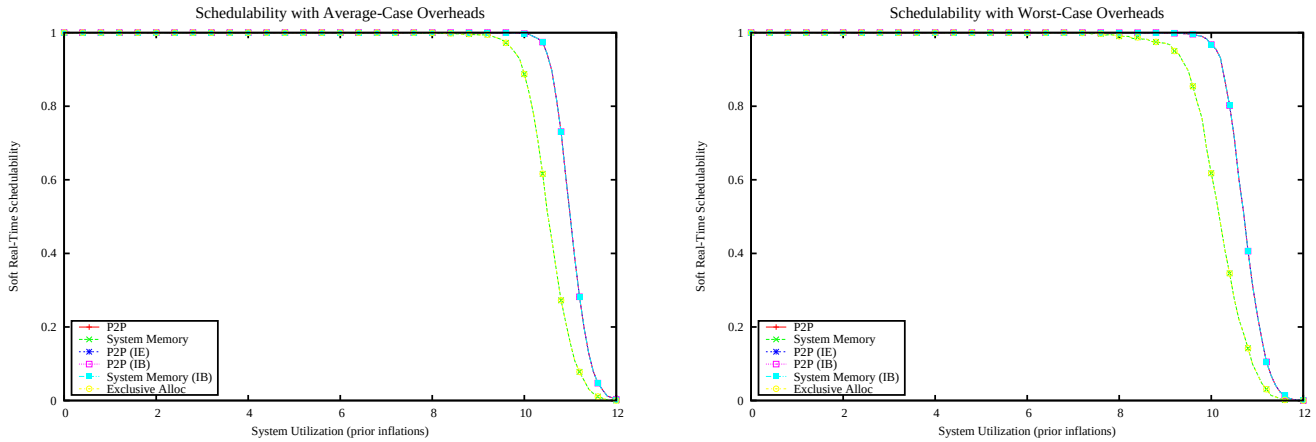

Figure 5444: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

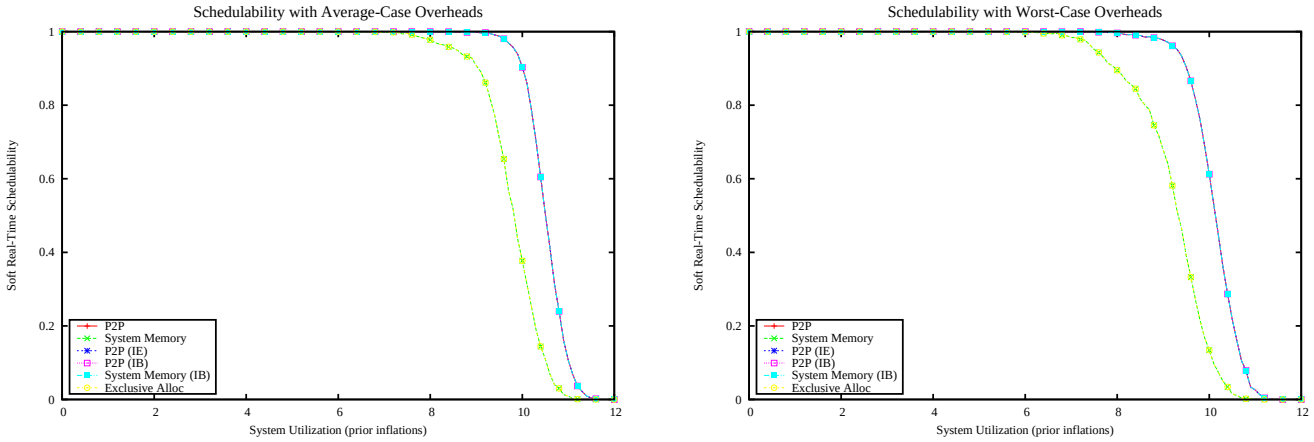

Figure 5445: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

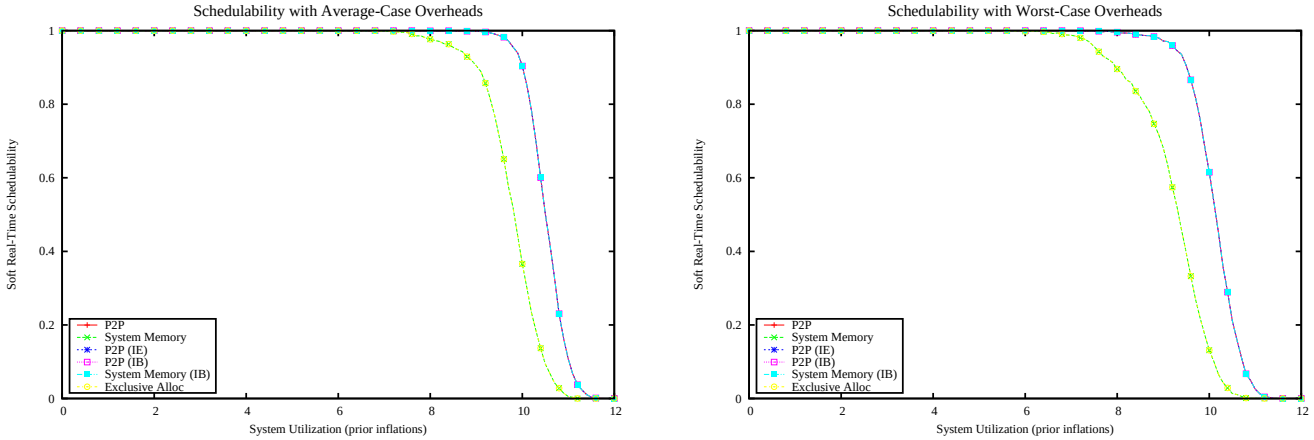

Figure 5446: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

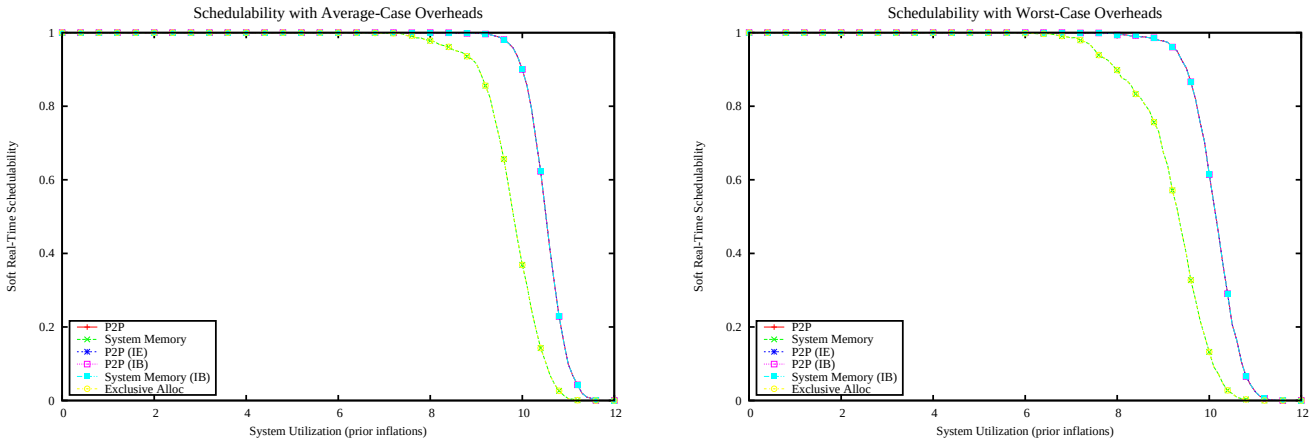

Figure 5447: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

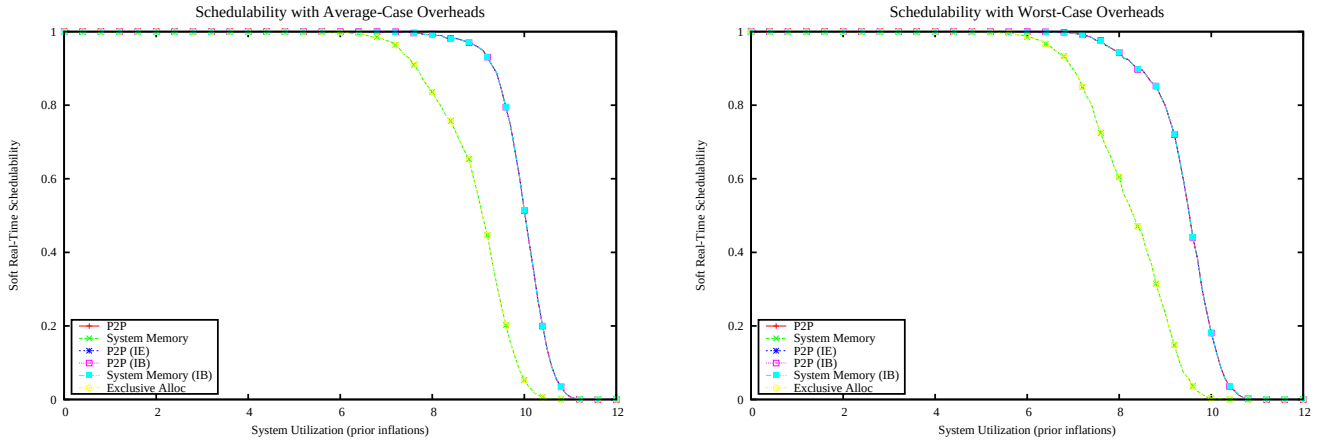

Figure 5448: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

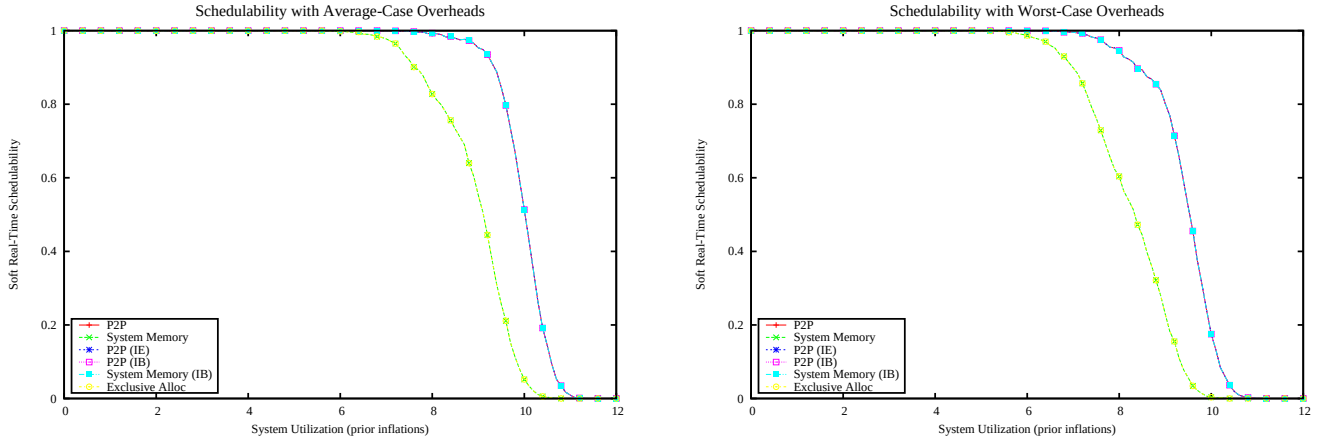

Figure 5449: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

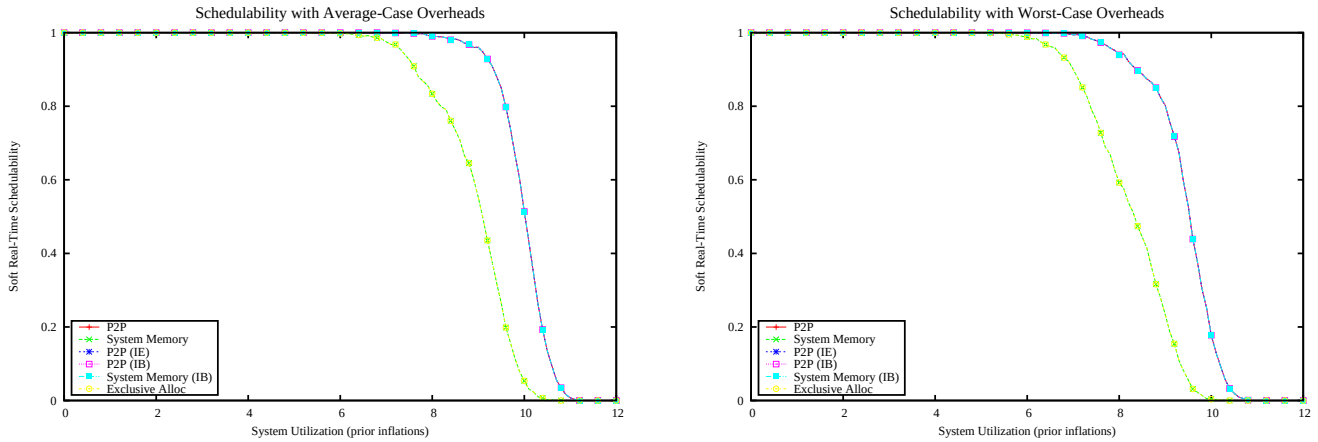

Figure 5450: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

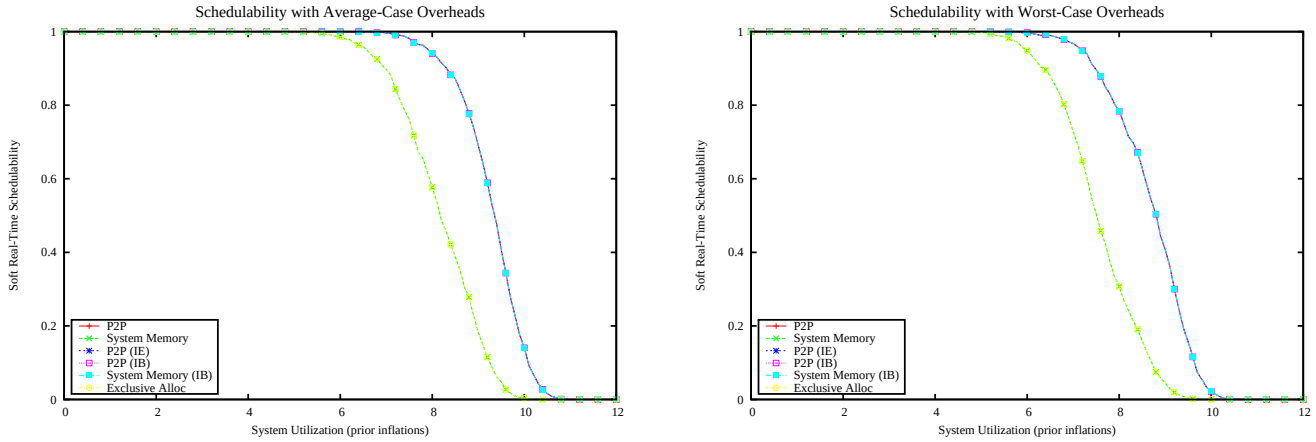

Figure 5451: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

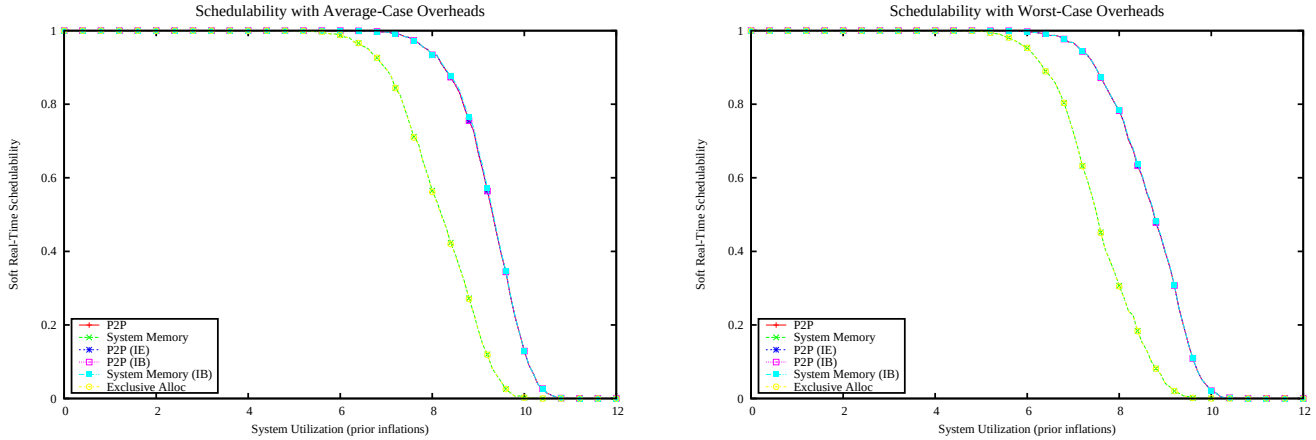

Figure 5452: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

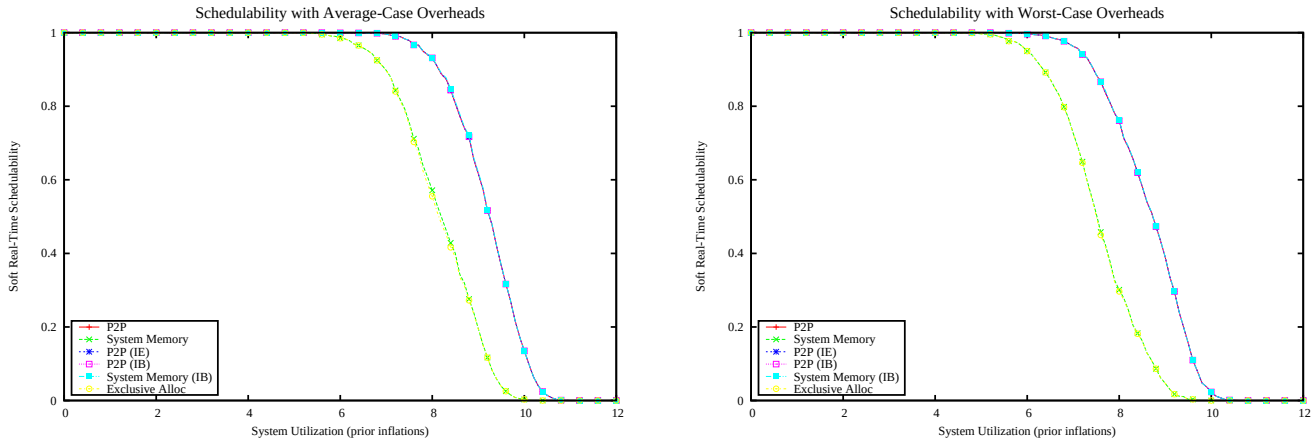

Figure 5453: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

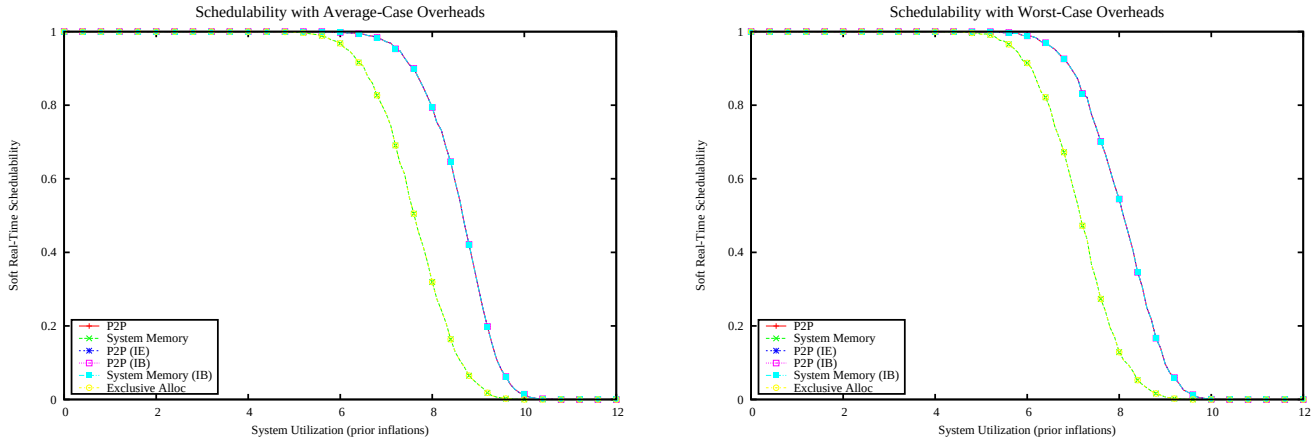

Figure 5454: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

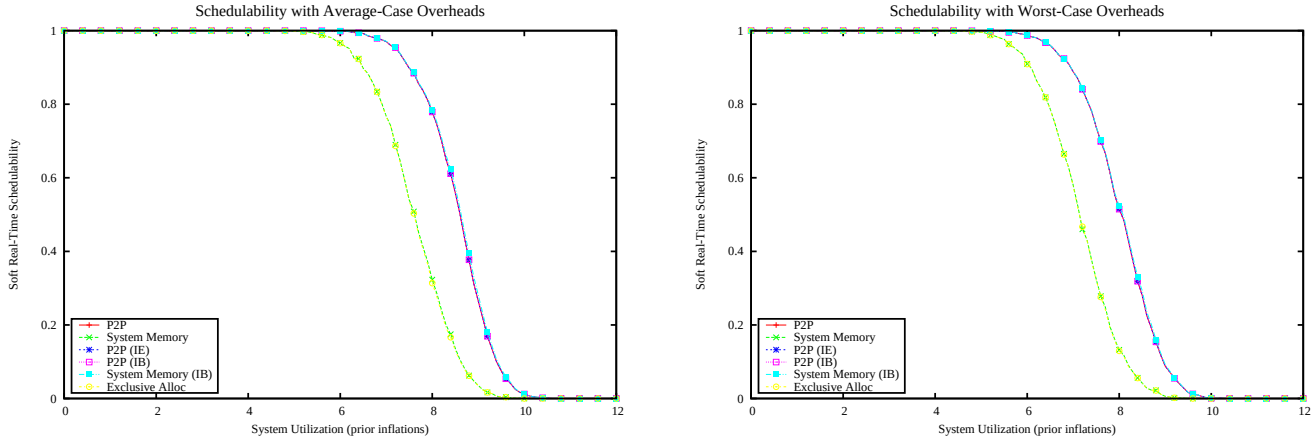

Figure 5455: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

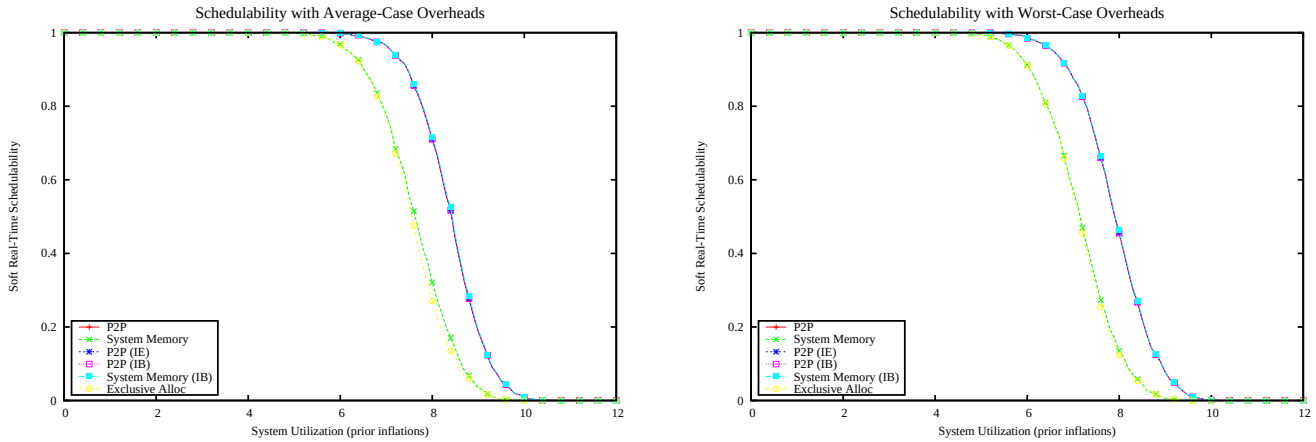

Figure 5456: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

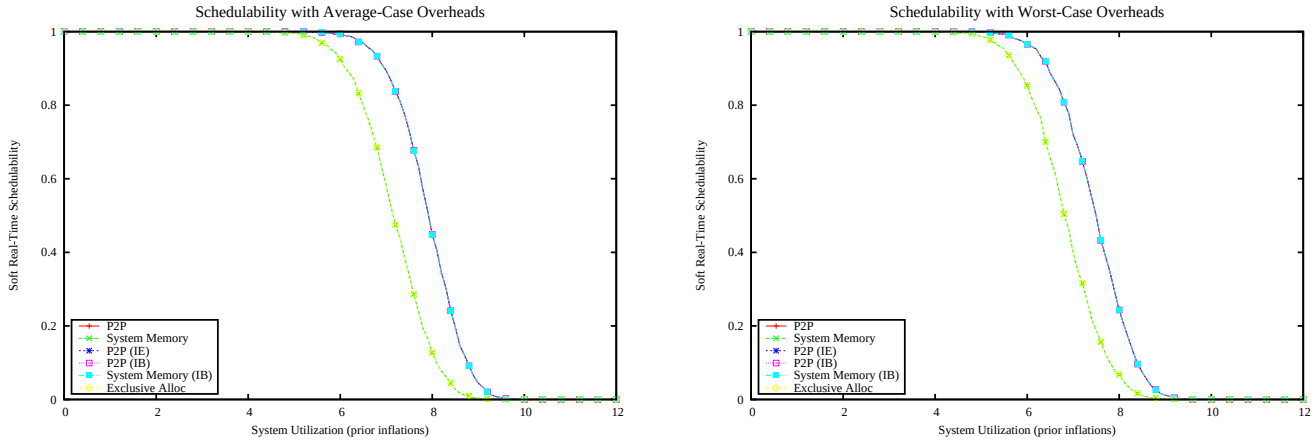

Figure 5457: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

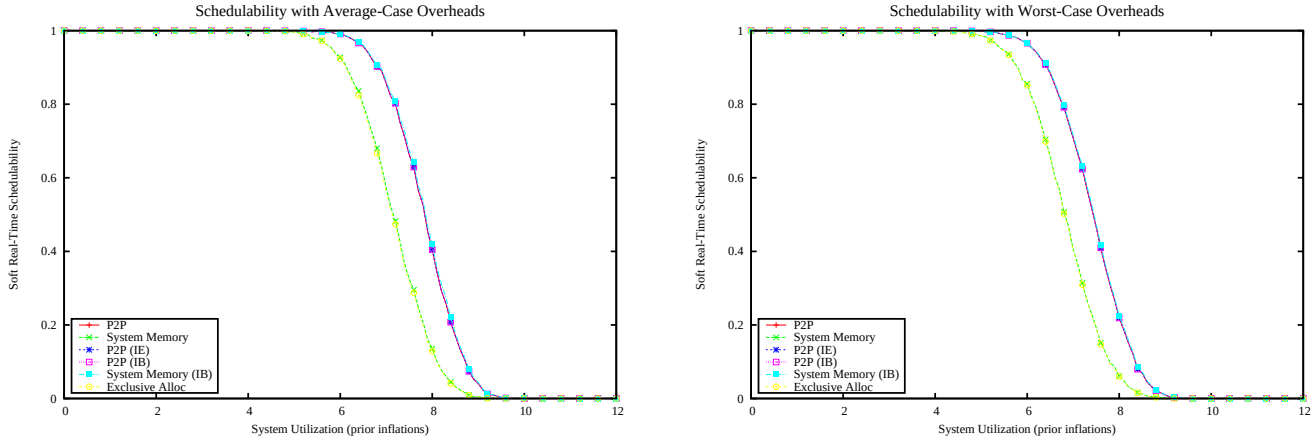

Figure 5458: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

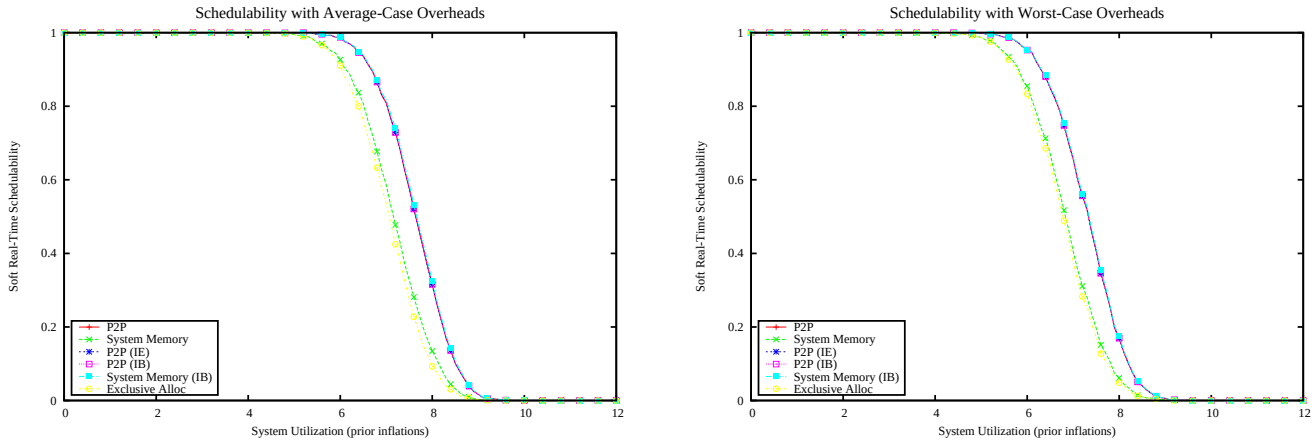

Figure 5459: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

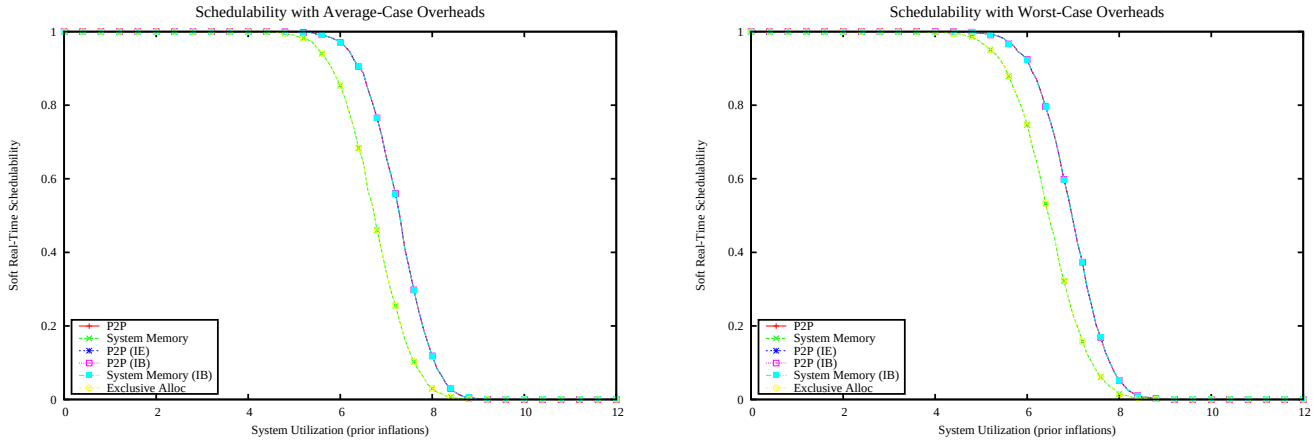

Figure 5460: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

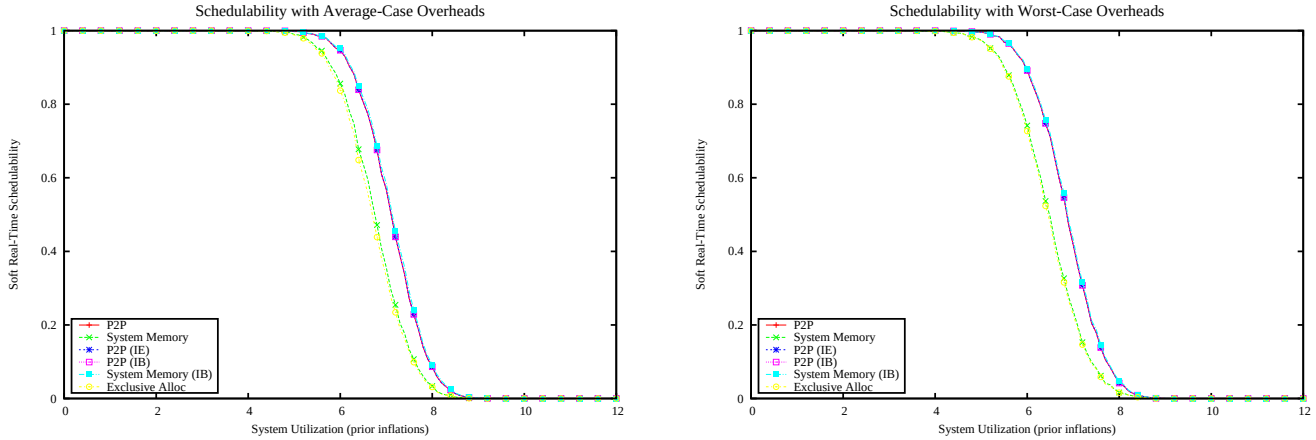

Figure 5461: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

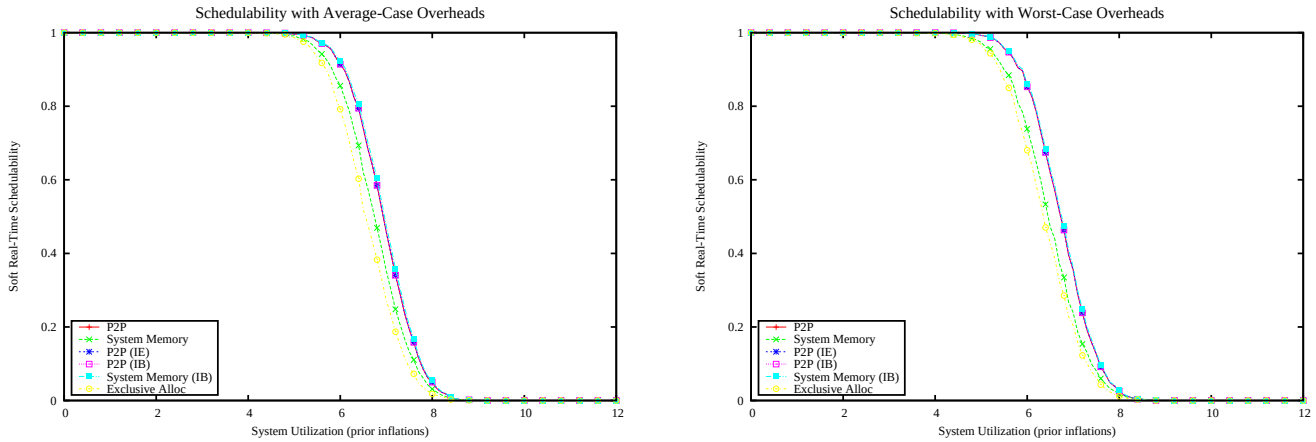

Figure 5462: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

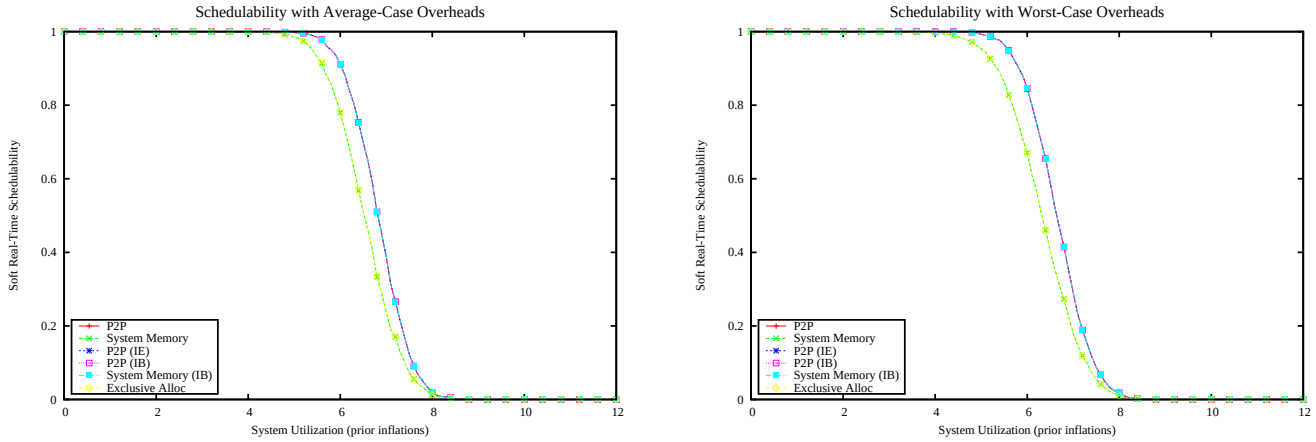

Figure 5463: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

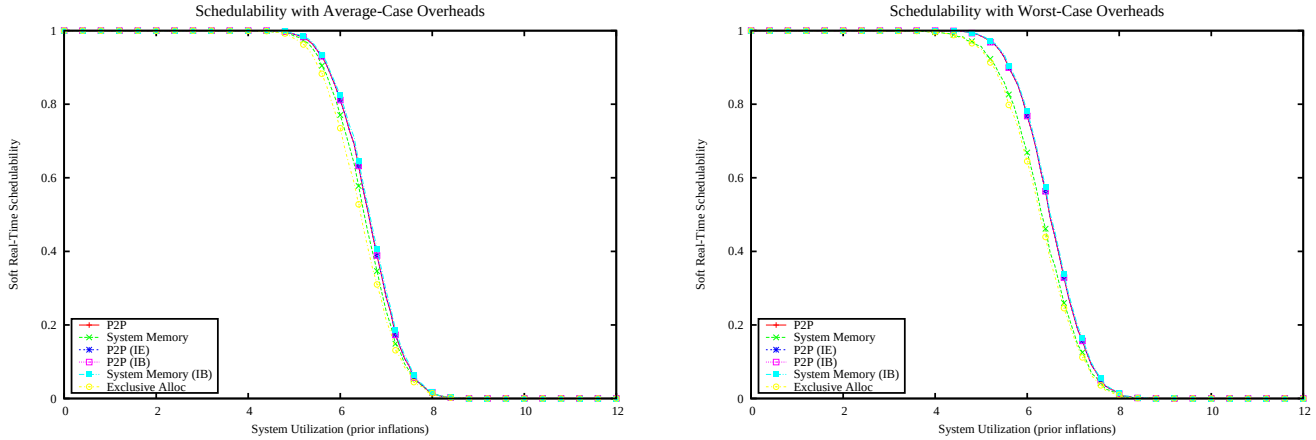

Figure 5464: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

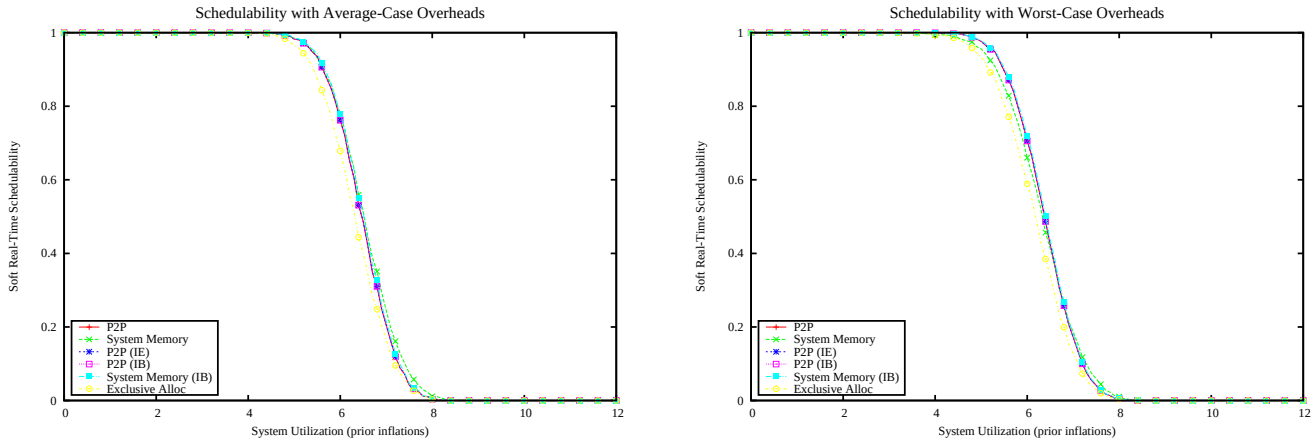

Figure 5465: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

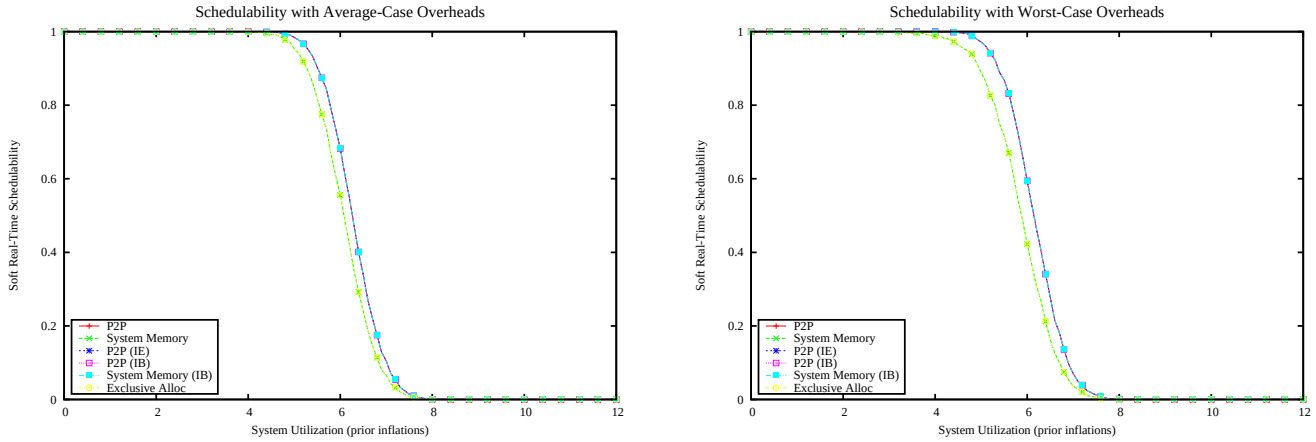

Figure 5466: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

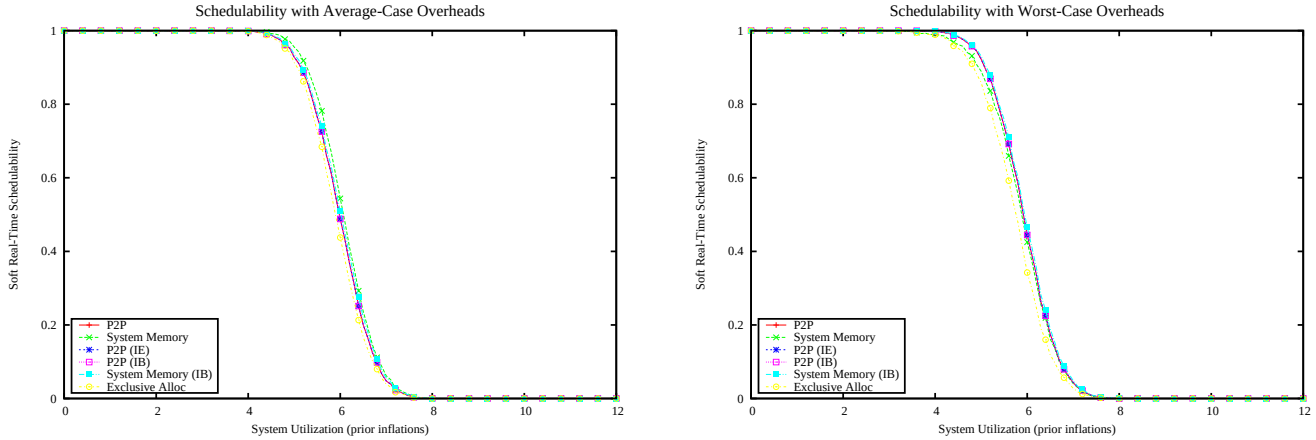

Figure 5467: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

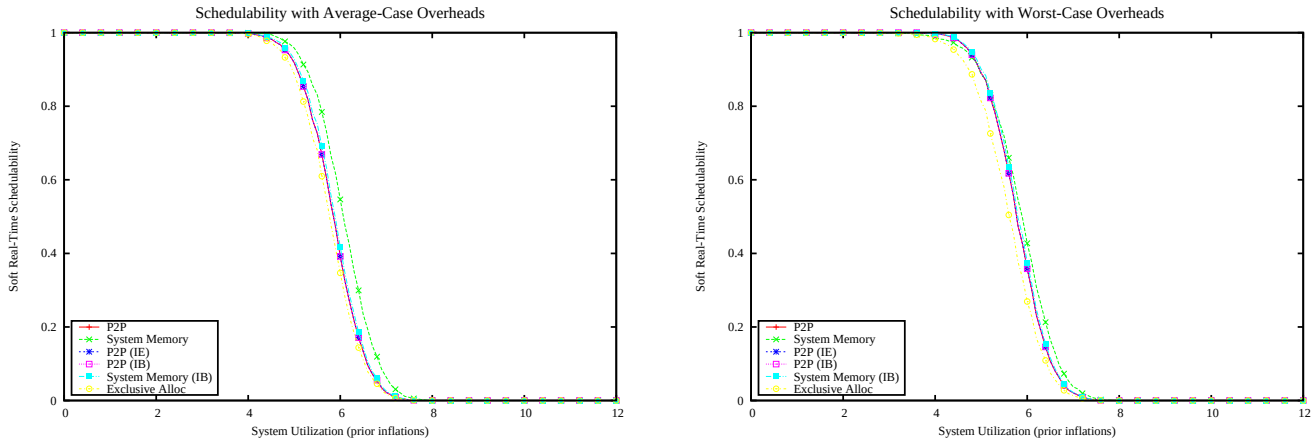

Figure 5468: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

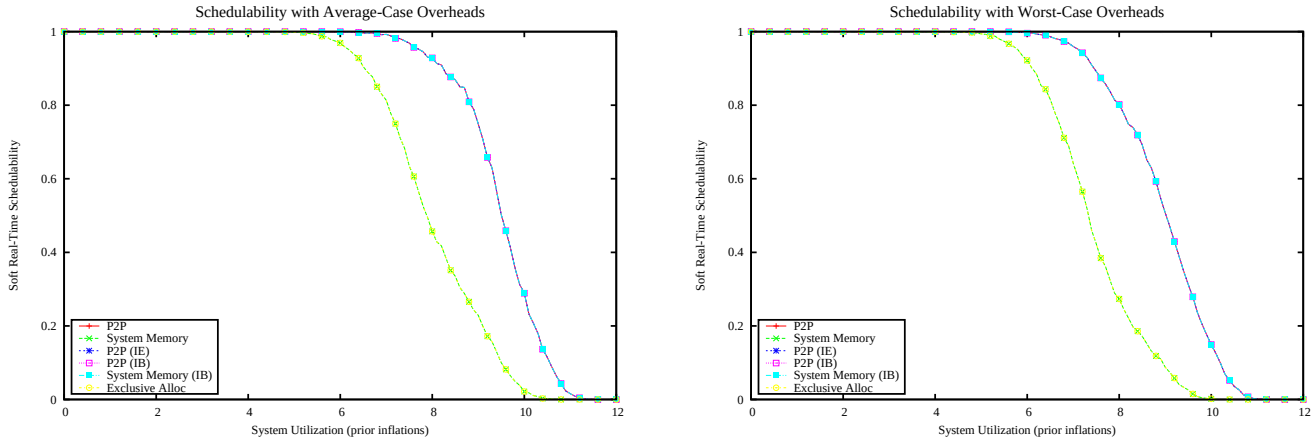

Figure 5469: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

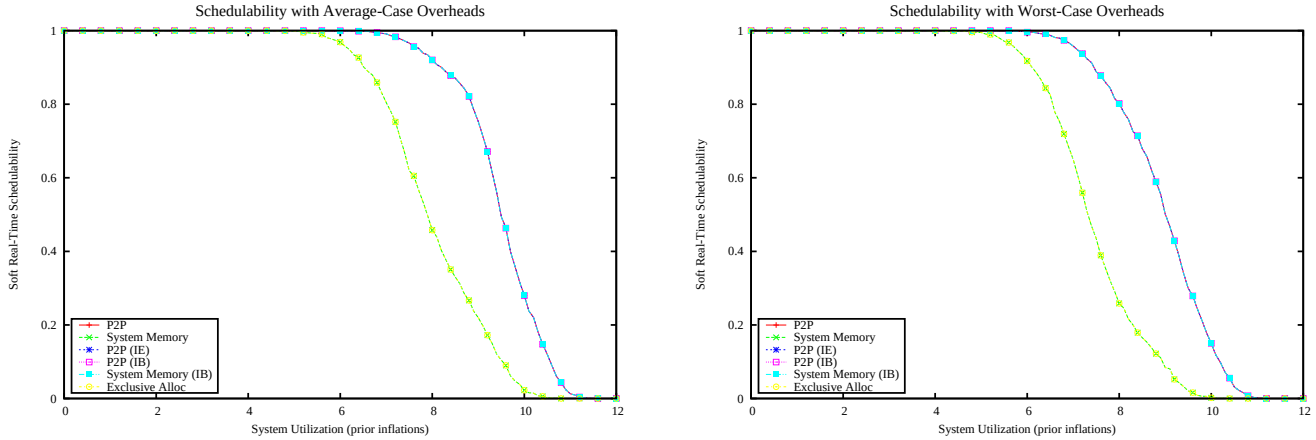

Figure 5470: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

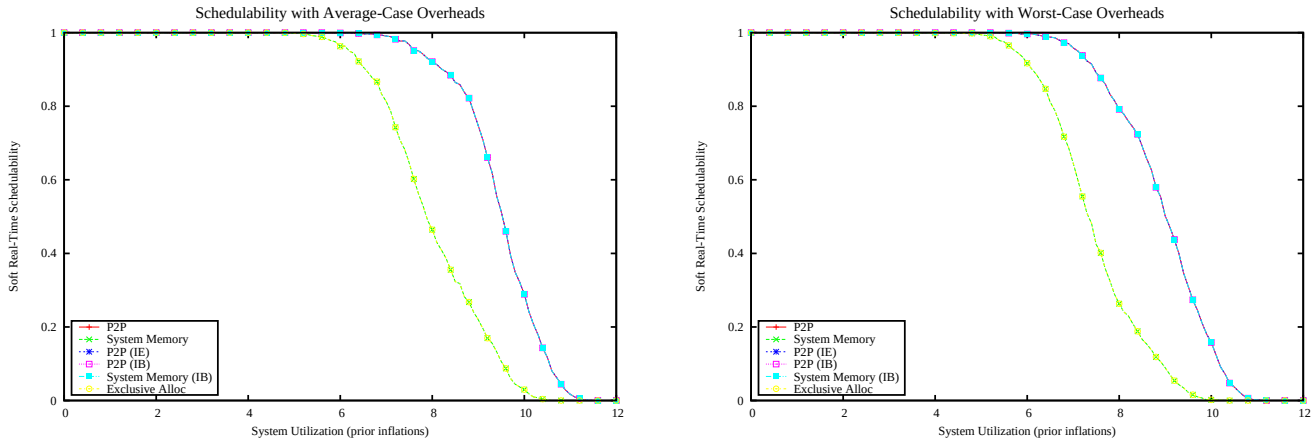

Figure 5471: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

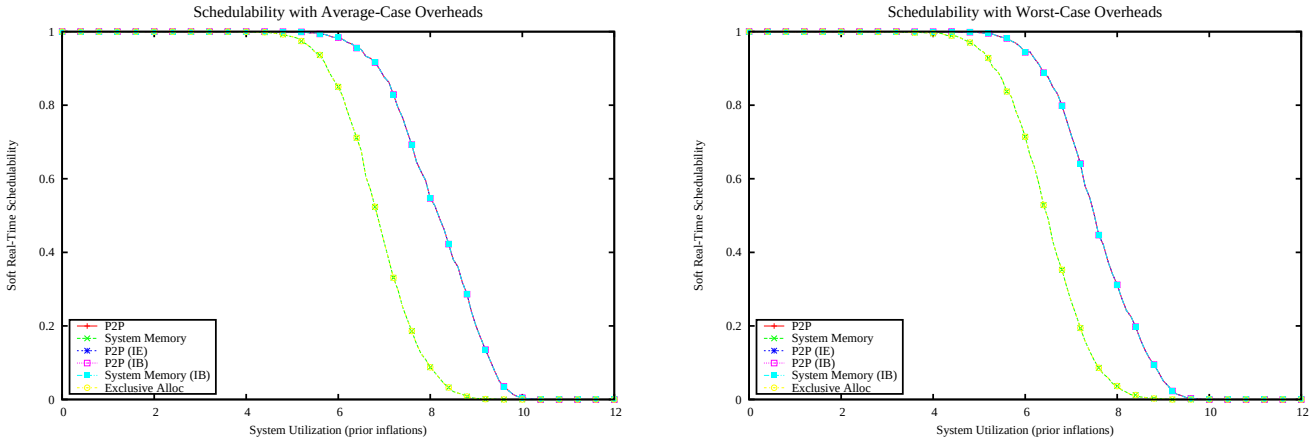

Figure 5472: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

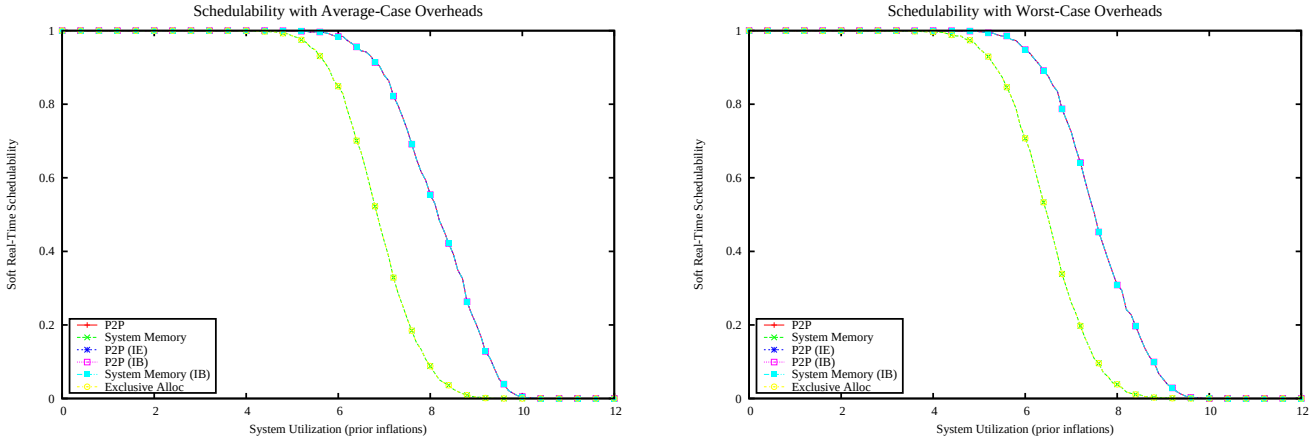

Figure 5473: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

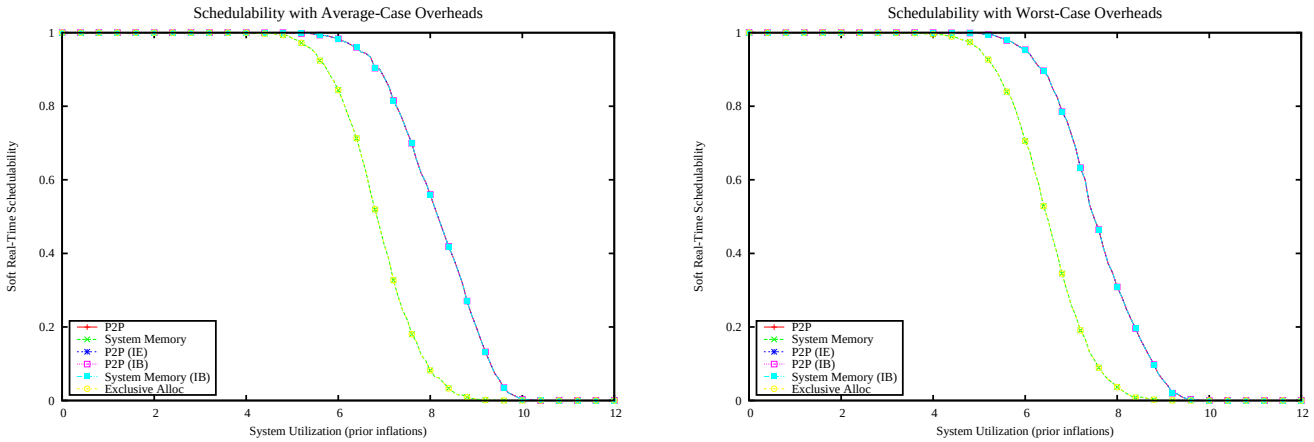

Figure 5474: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

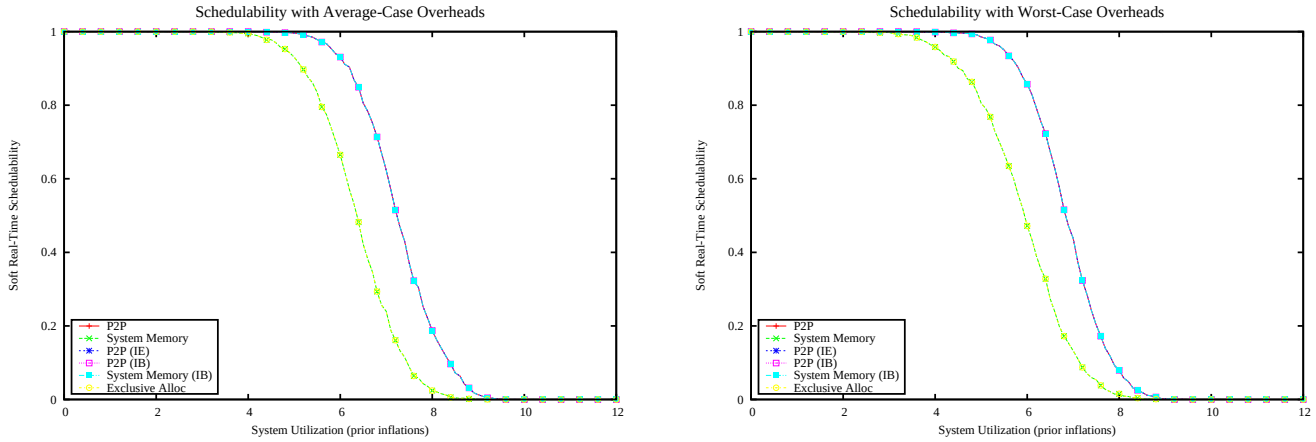

Figure 5475: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

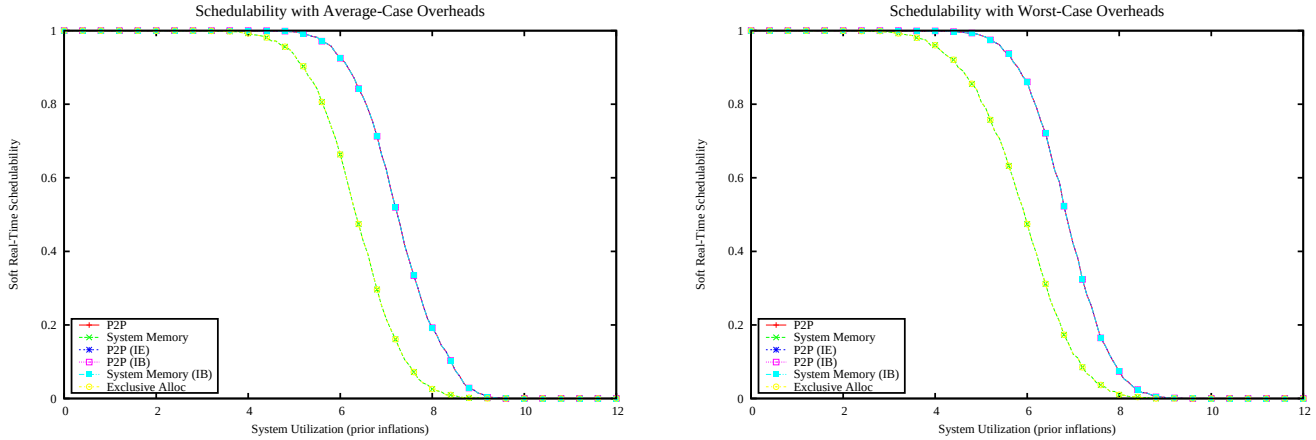

Figure 5476: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

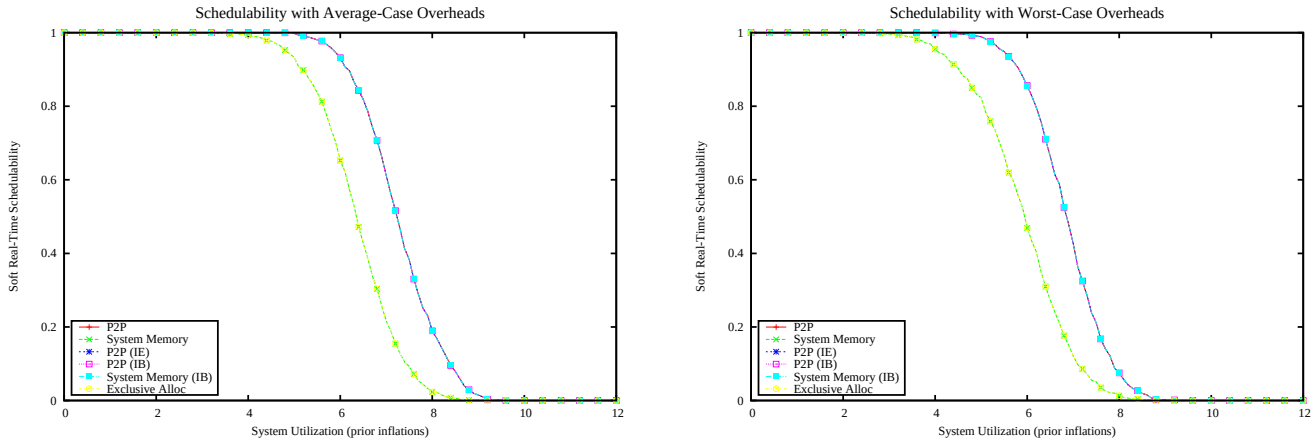

Figure 5477: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

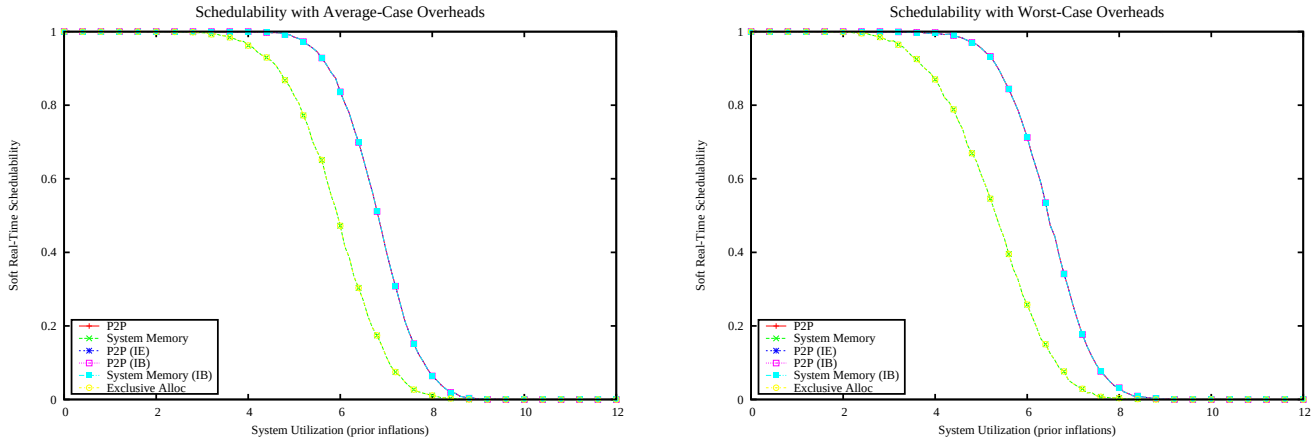

Figure 5478: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

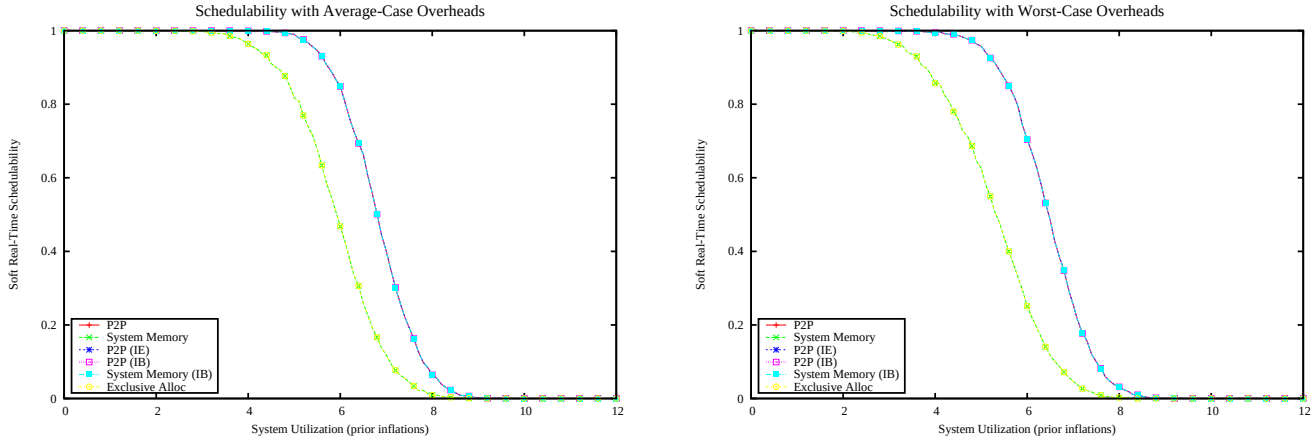

Figure 5479: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

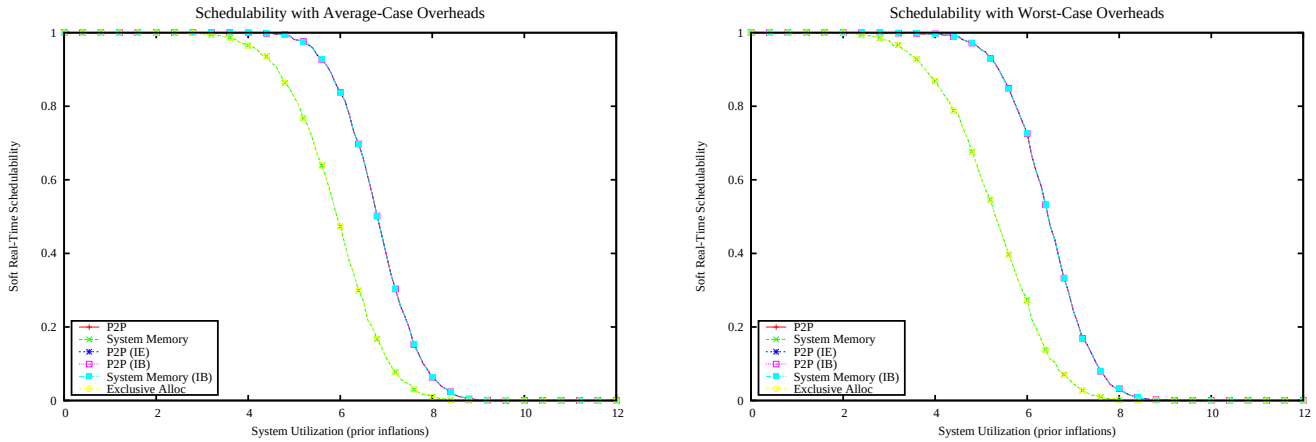

Figure 5480: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

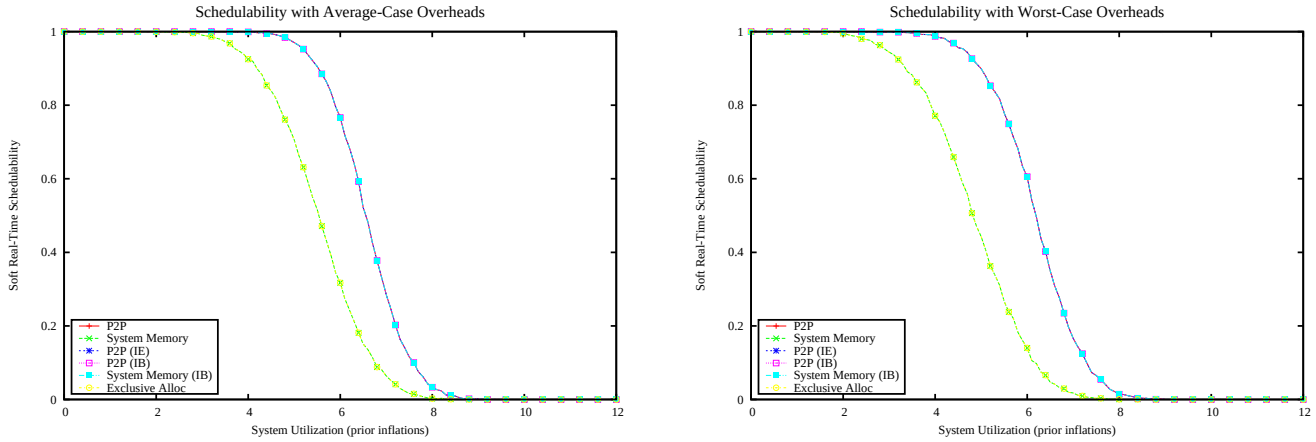

Figure 5481: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

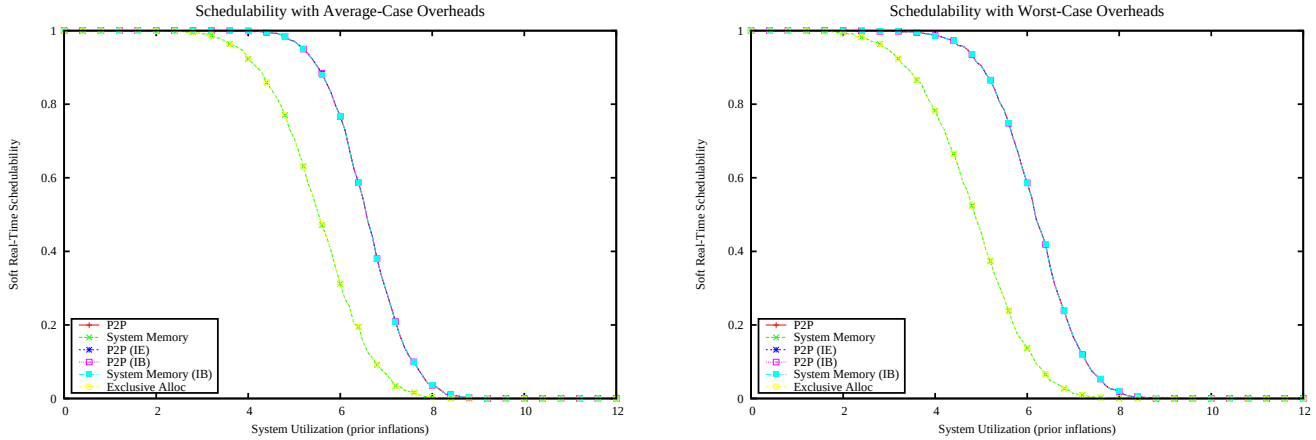

Figure 5482: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

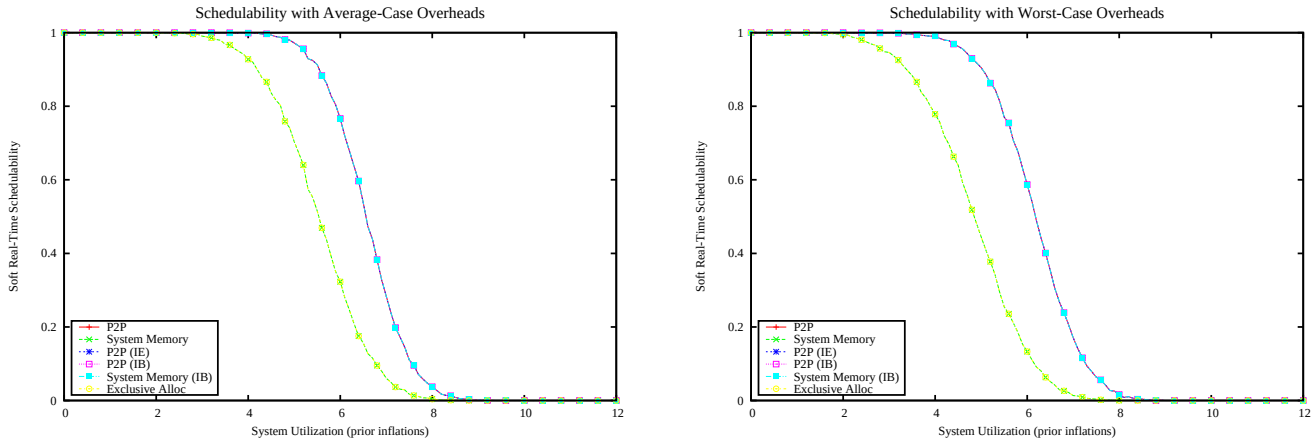

Figure 5483: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

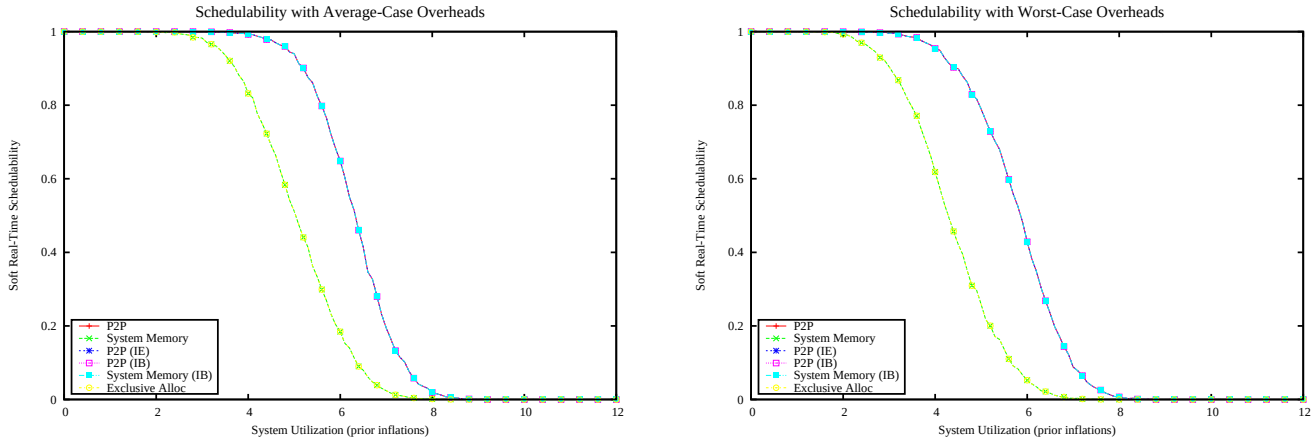

Figure 5484: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

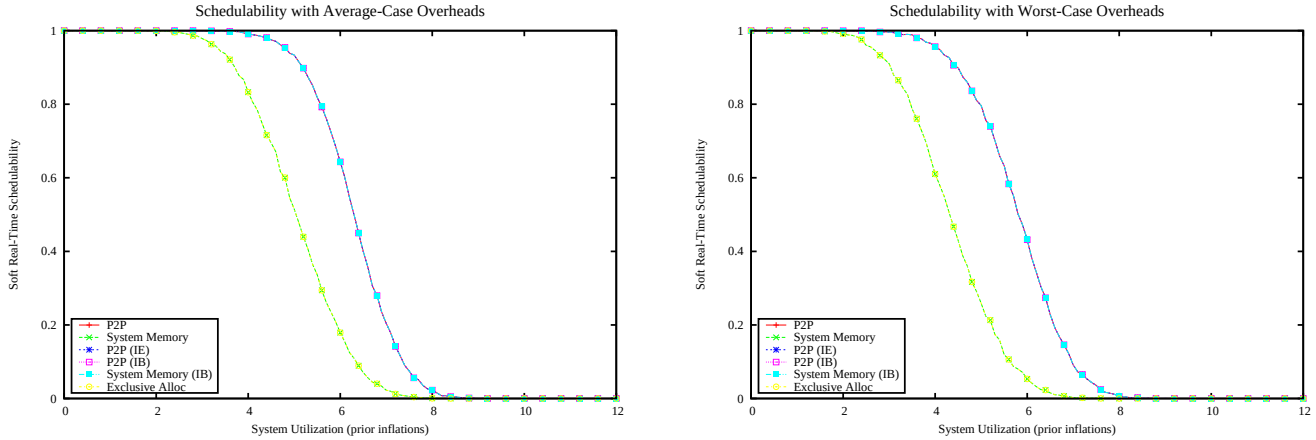

Figure 5485: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

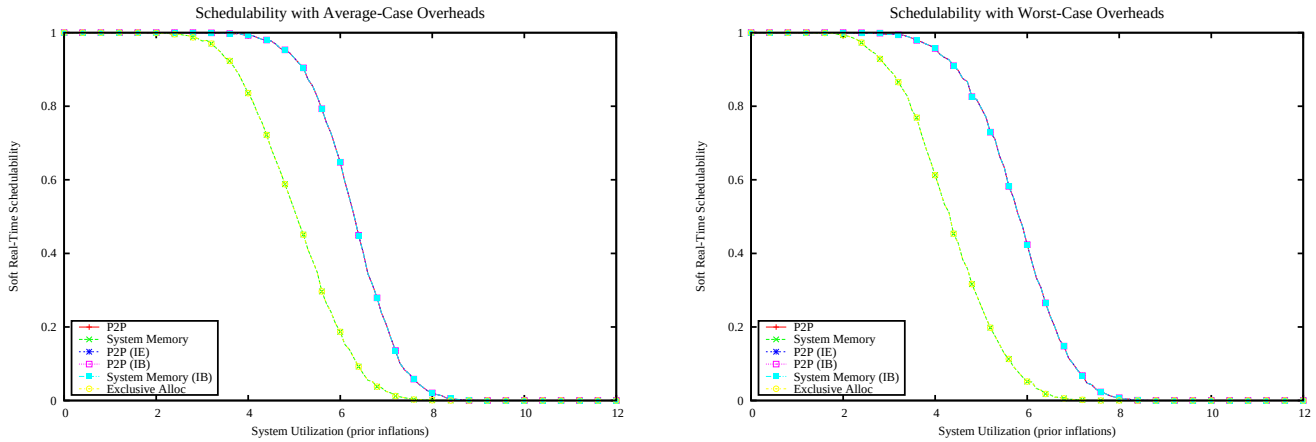

Figure 5486: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

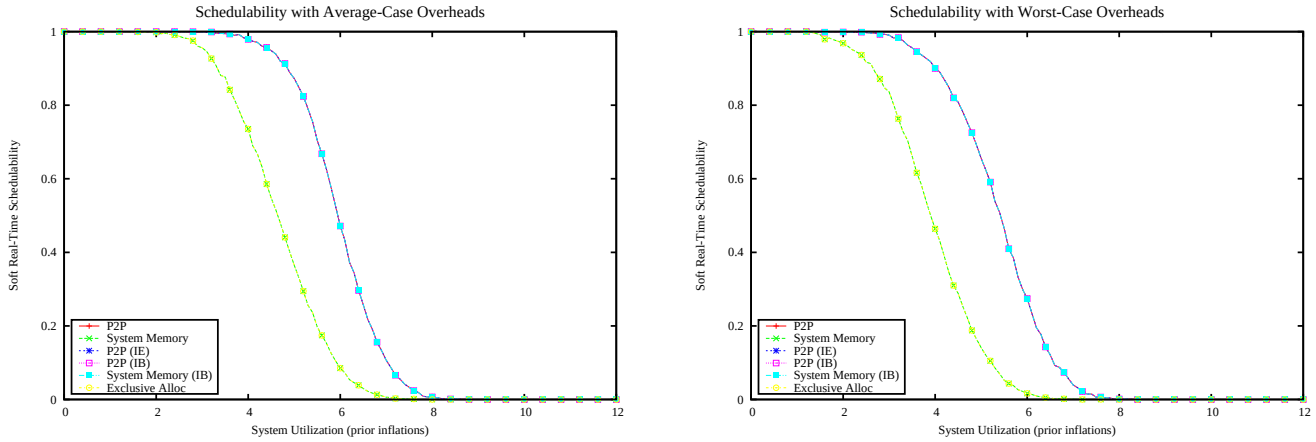

Figure 5487: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

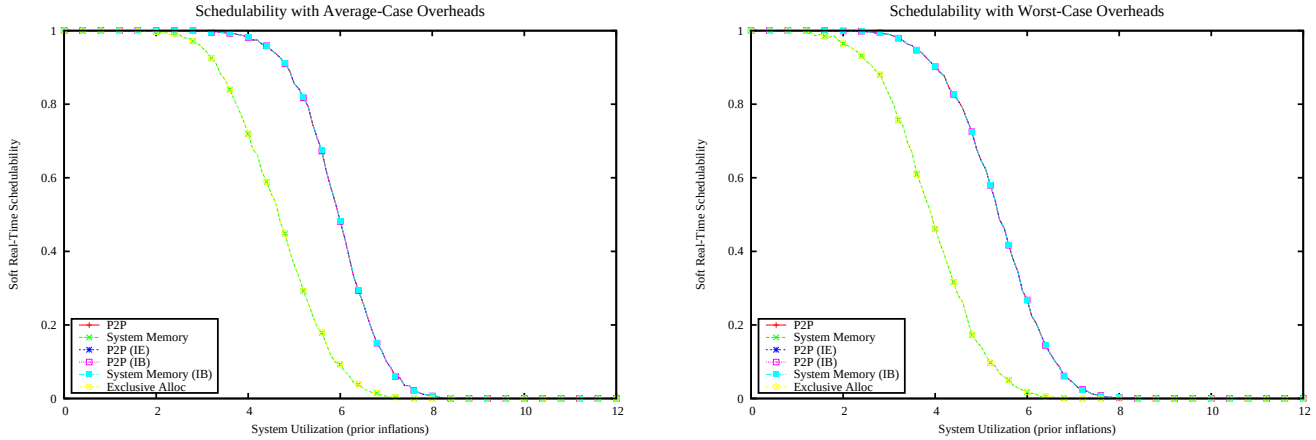

Figure 5488: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

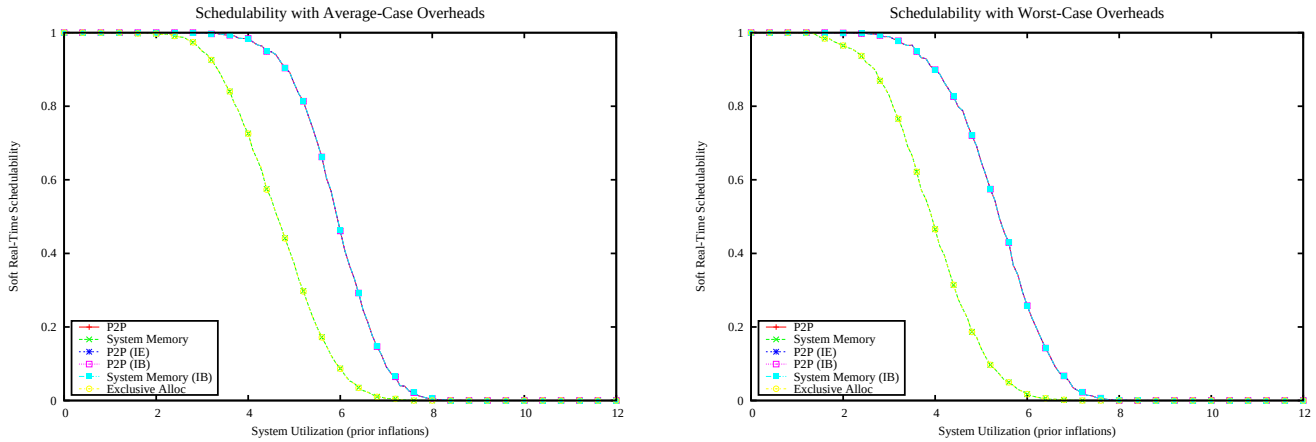

Figure 5489: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

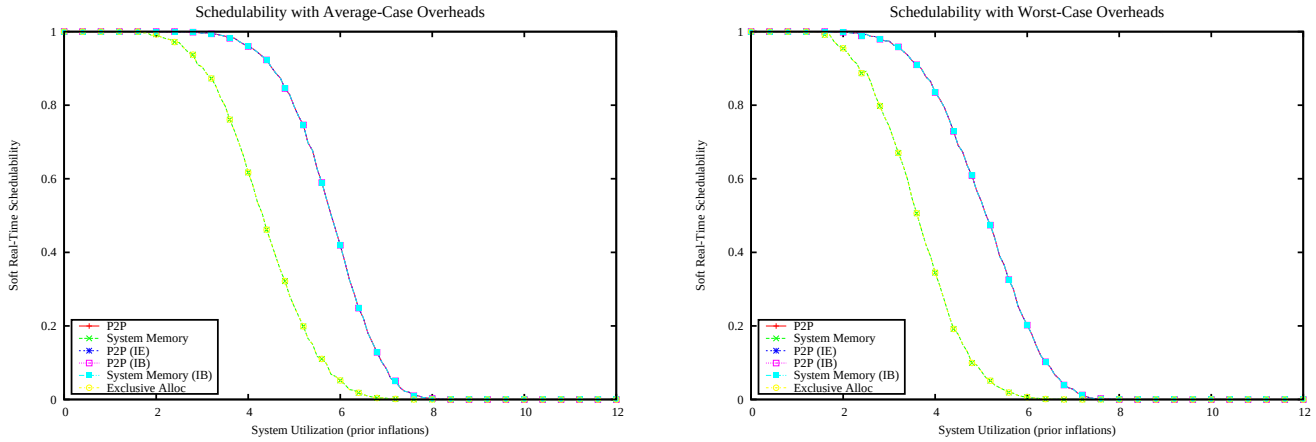

Figure 5490: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

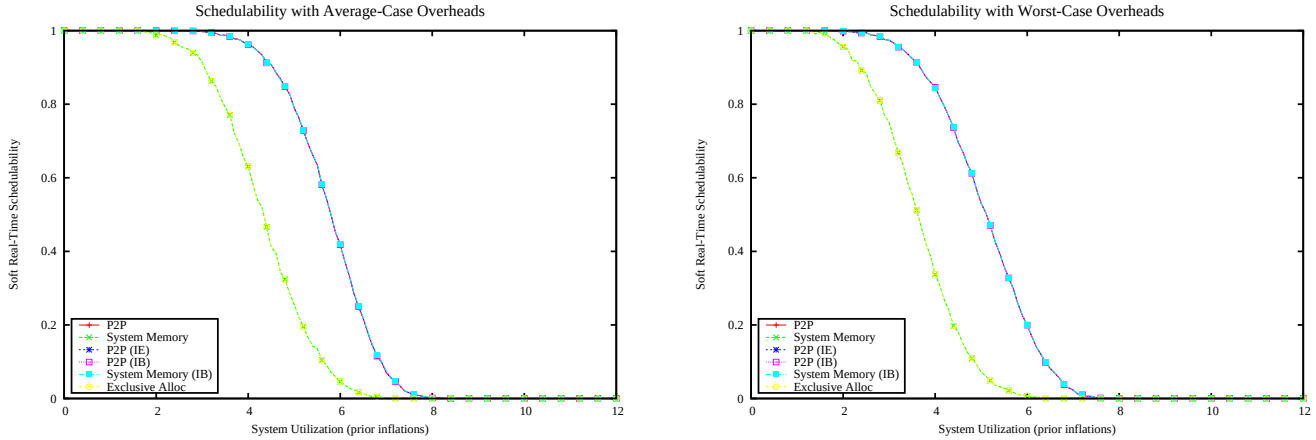

Figure 5491: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

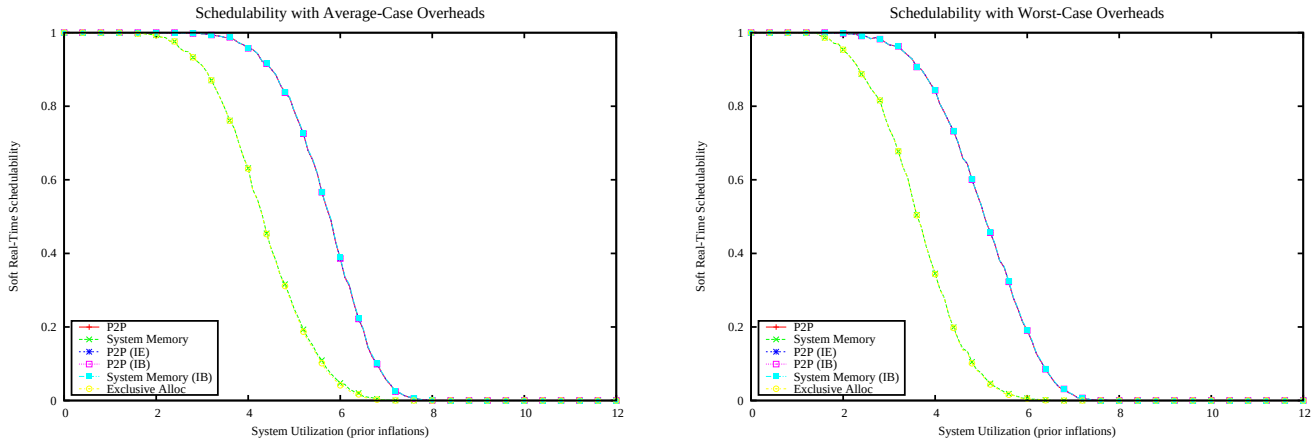

Figure 5492: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

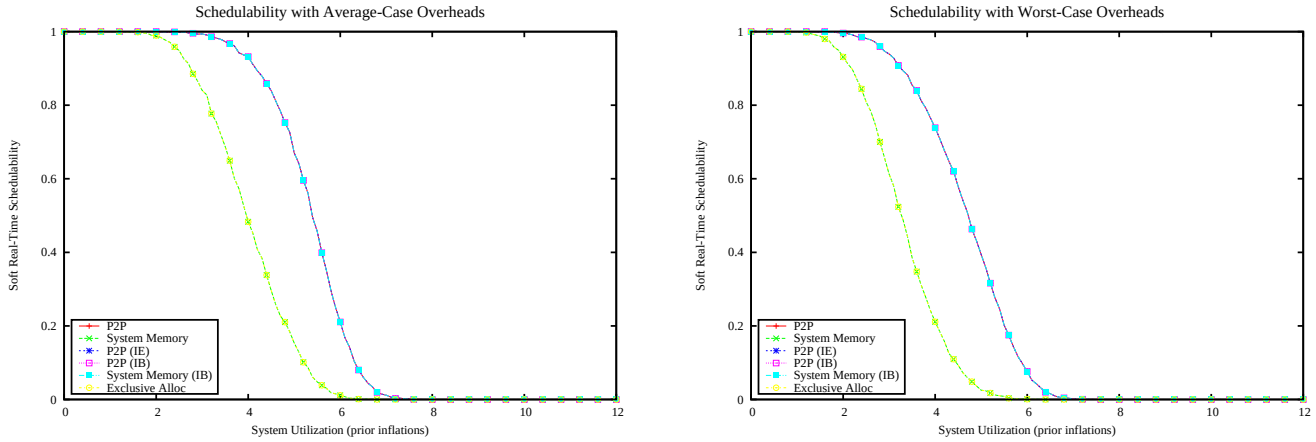

Figure 5493: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

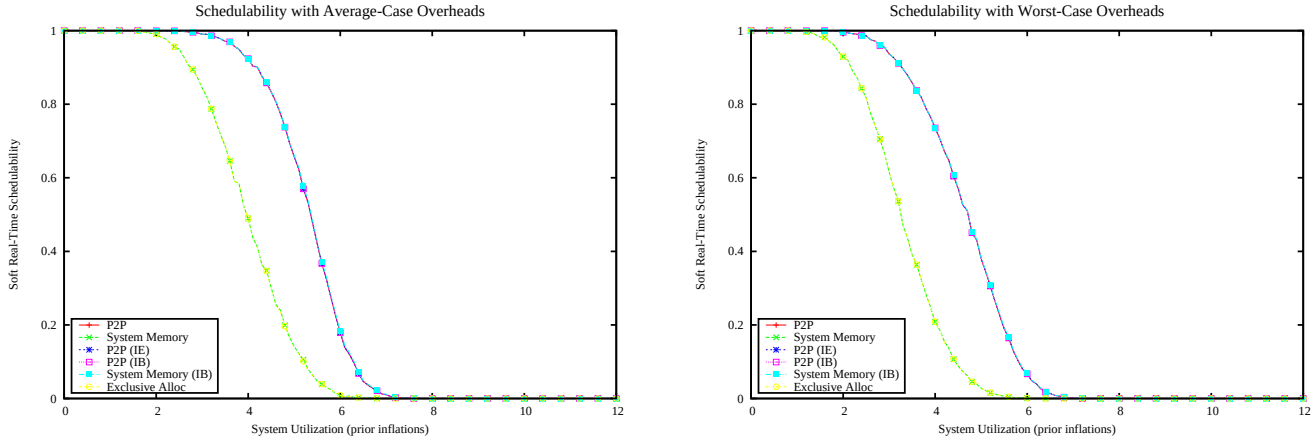

Figure 5494: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

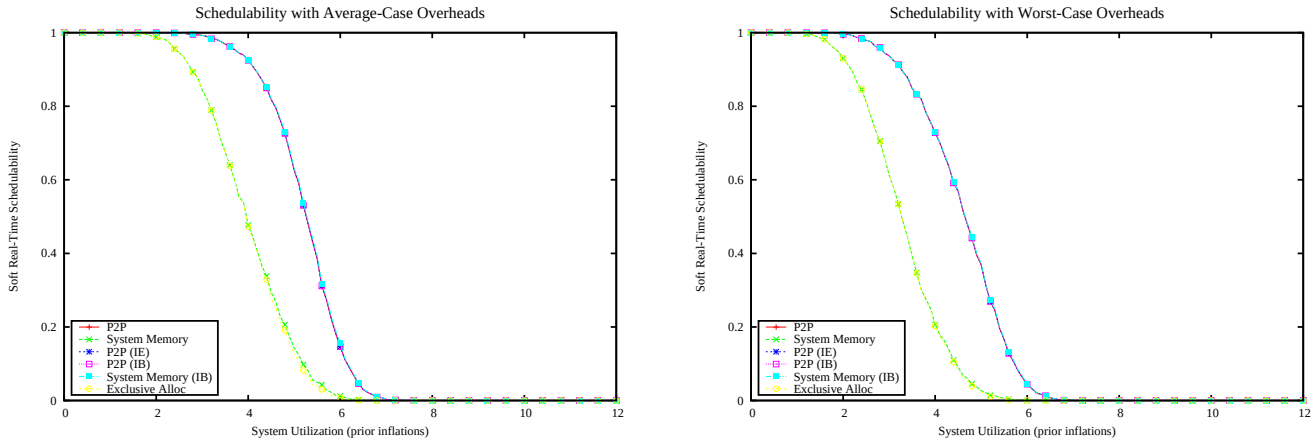

Figure 5495: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

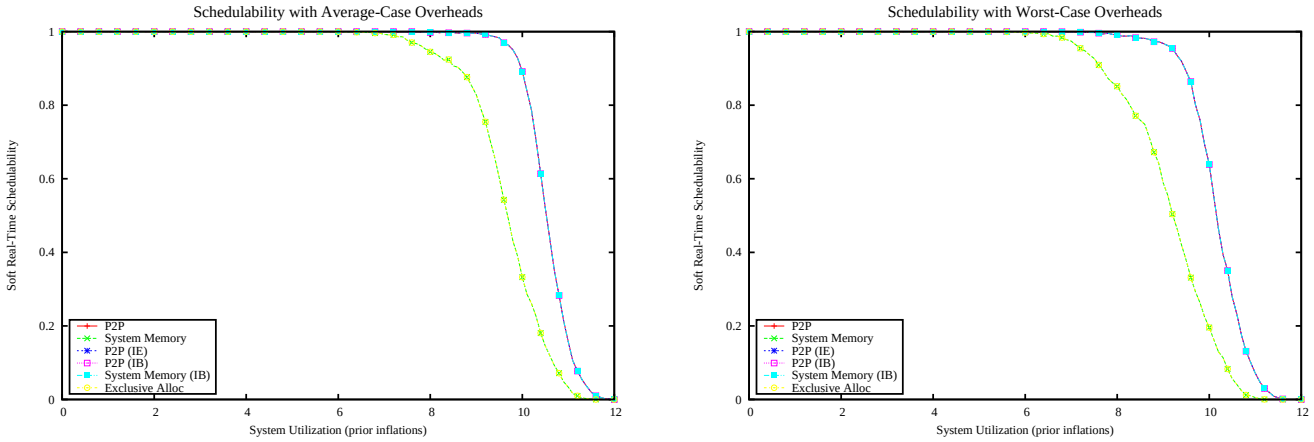

Figure 5496: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

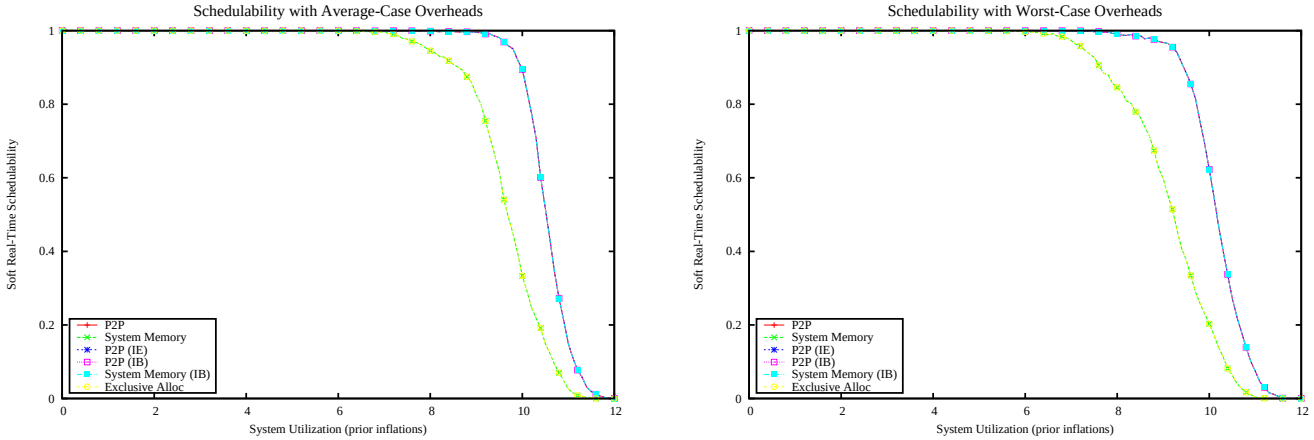

Figure 5497: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

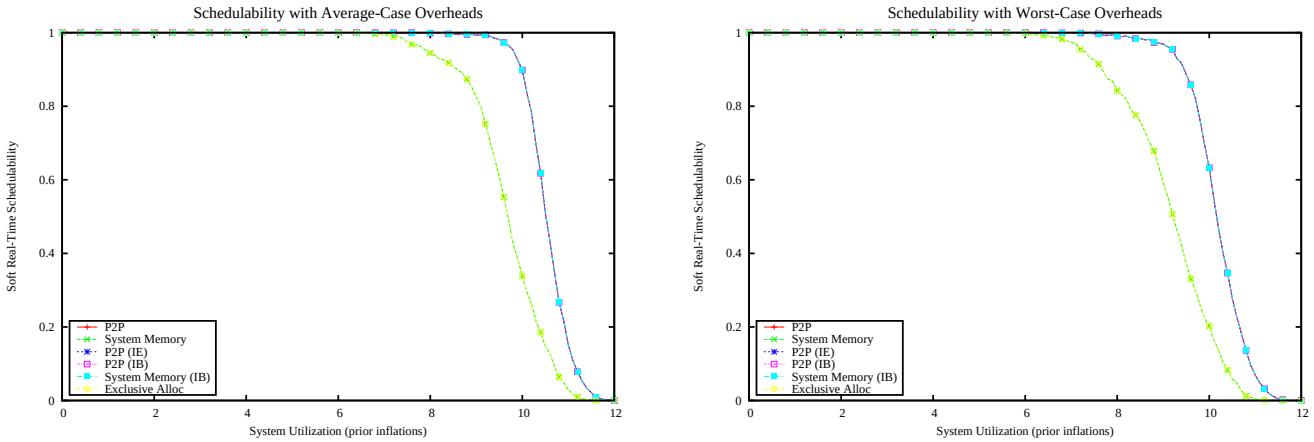

Figure 5498: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

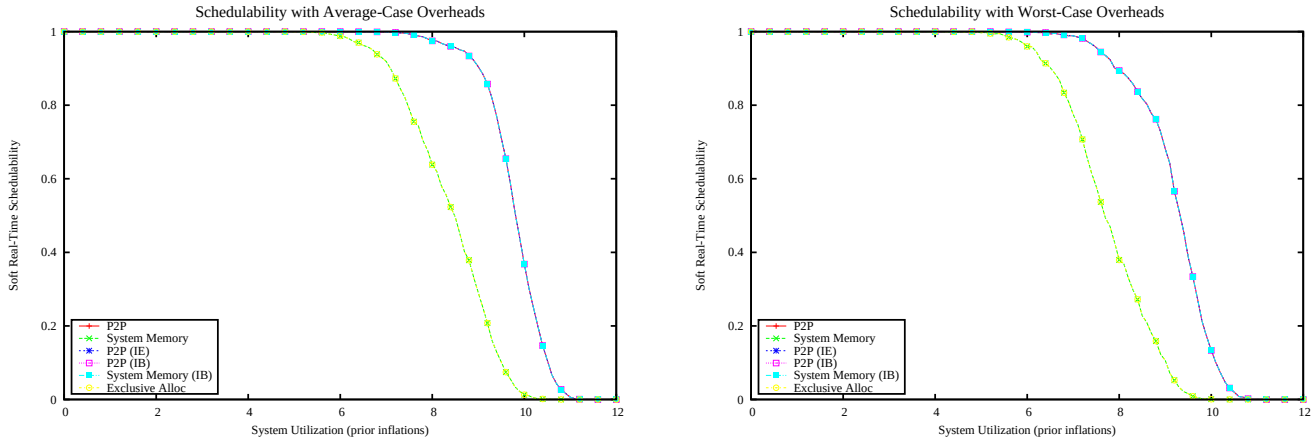

Figure 5499: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

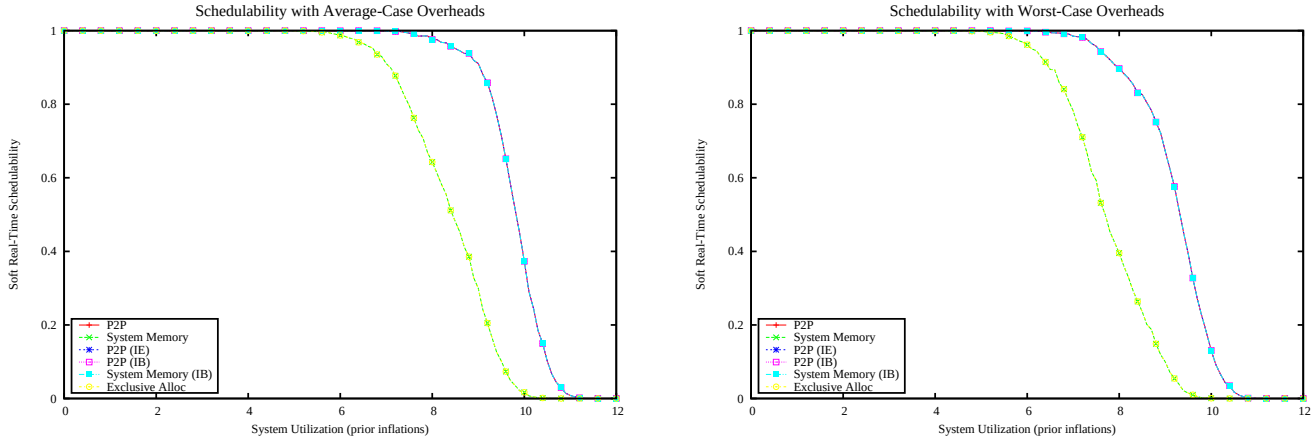

Figure 5500: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

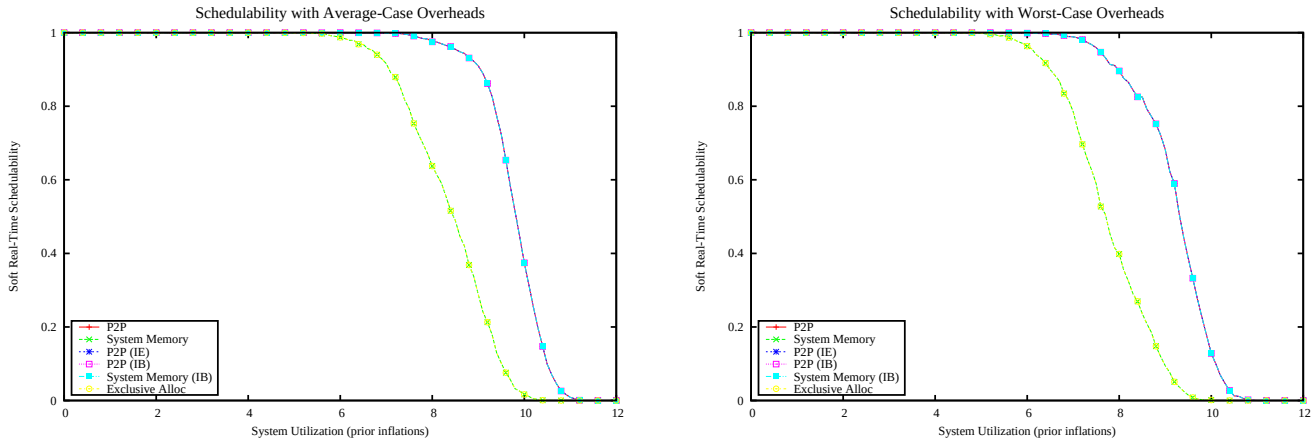

Figure 5501: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

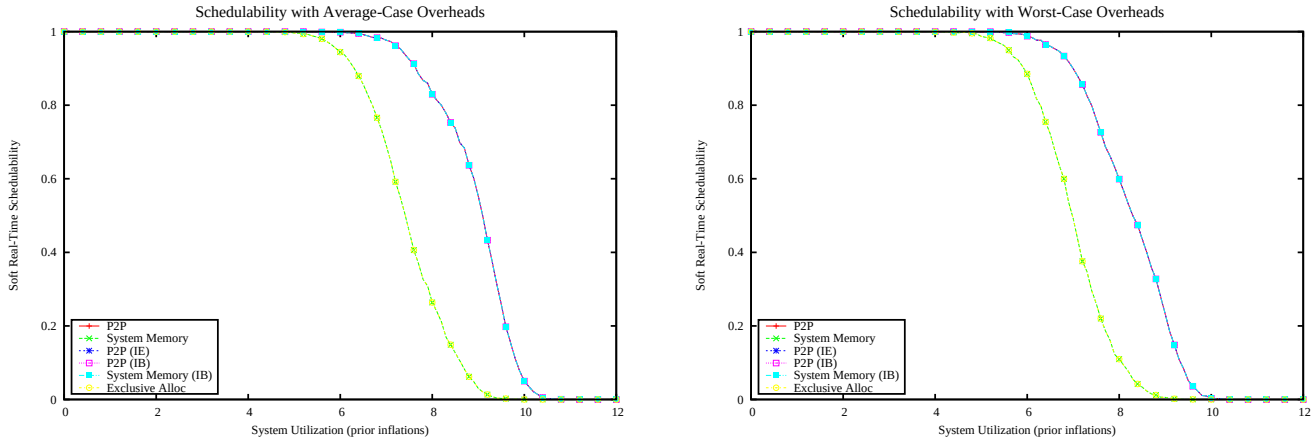

Figure 5502: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

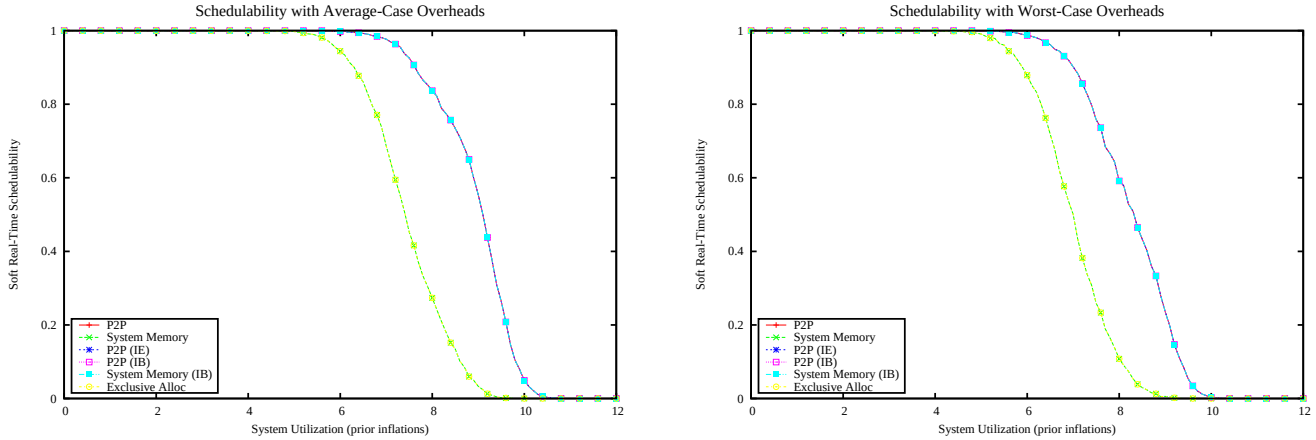

Figure 5503: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

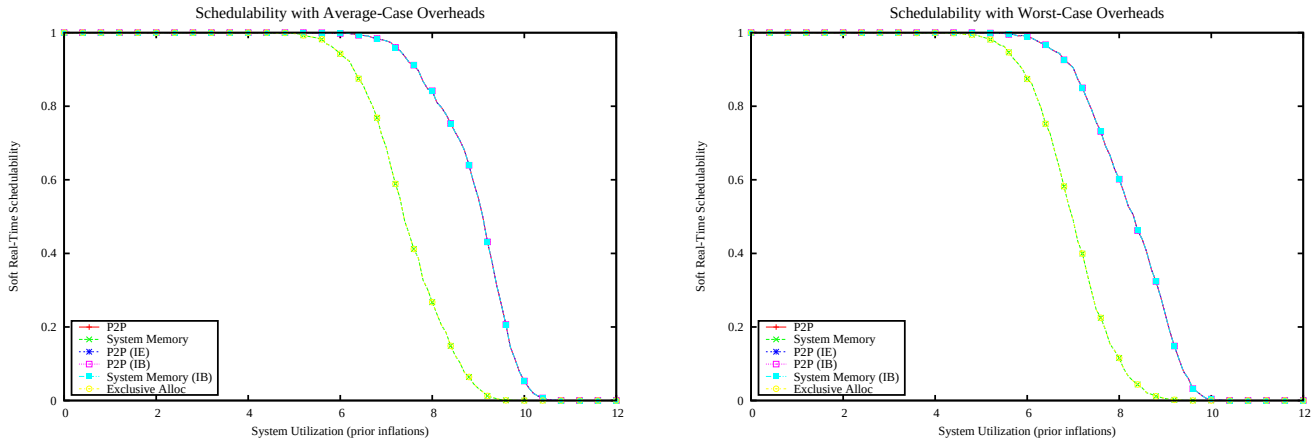

Figure 5504: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

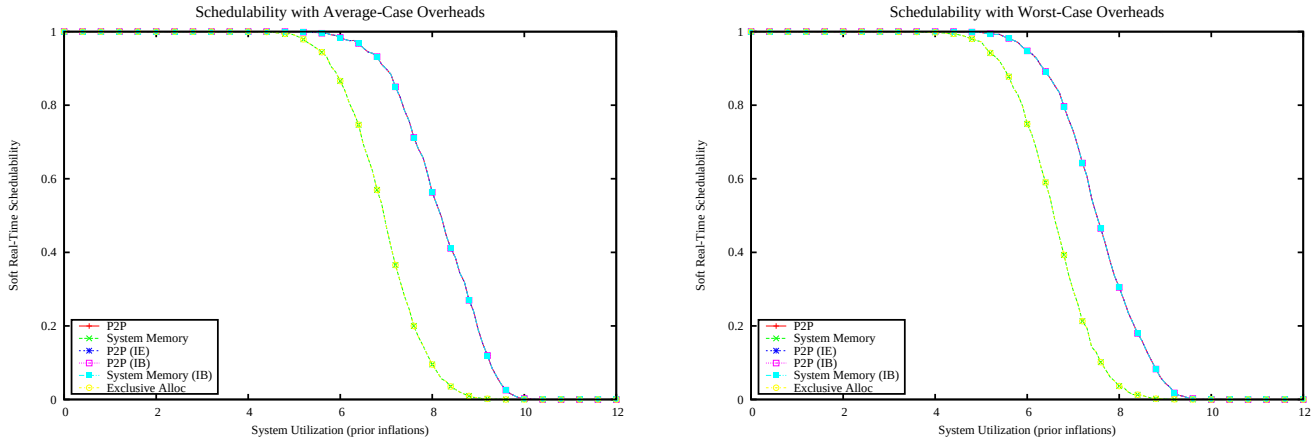

Figure 5505: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

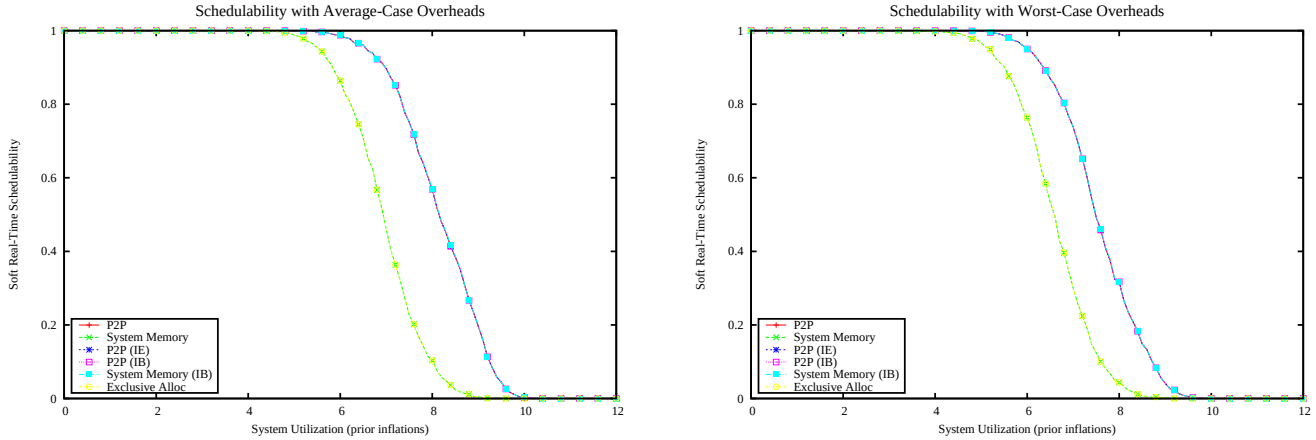

Figure 5506: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

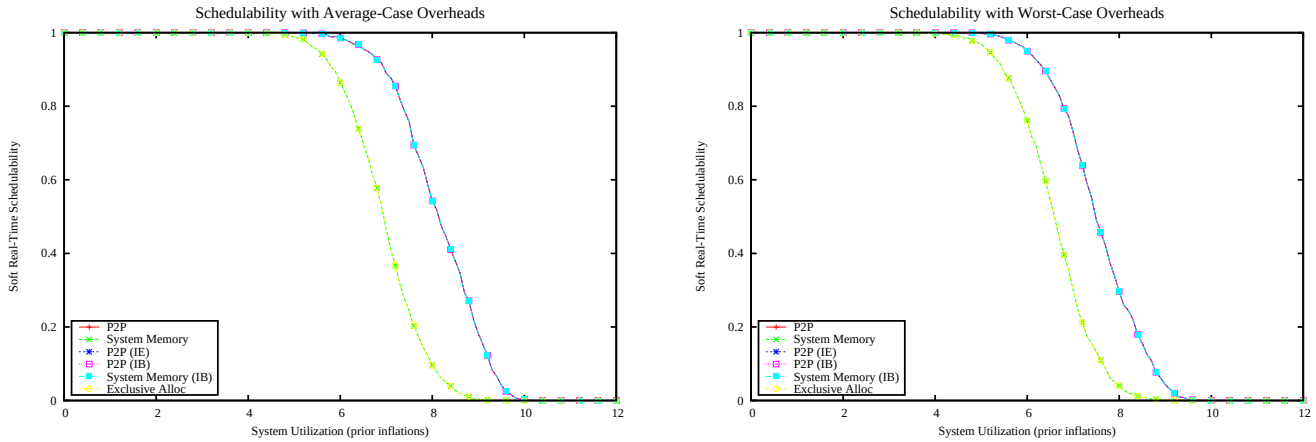

Figure 5507: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

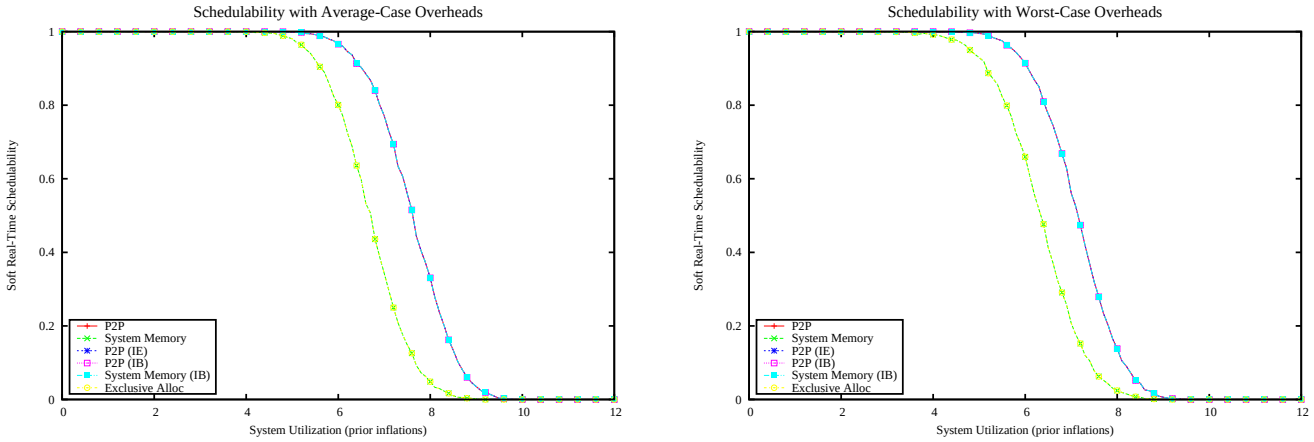

Figure 5508: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

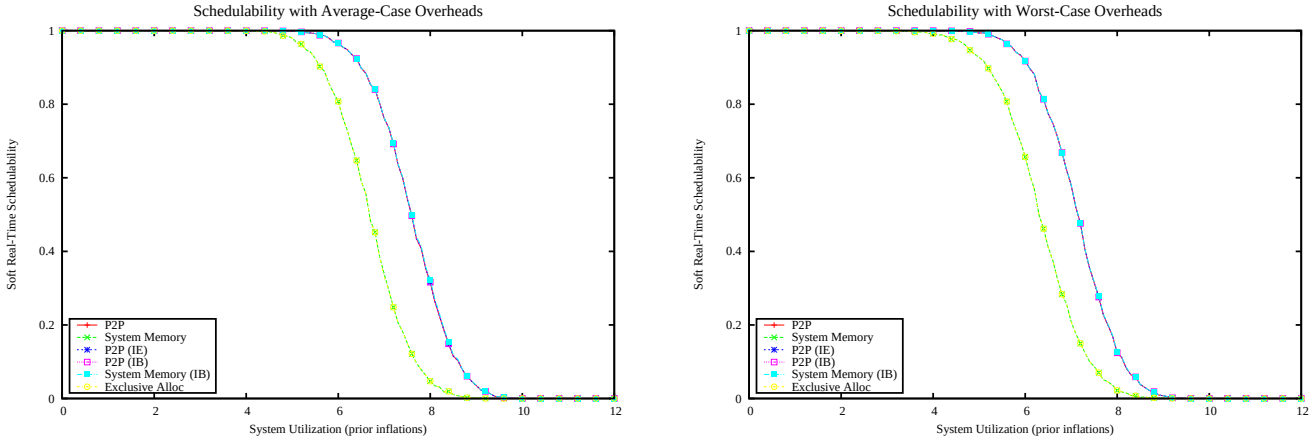

Figure 5509: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

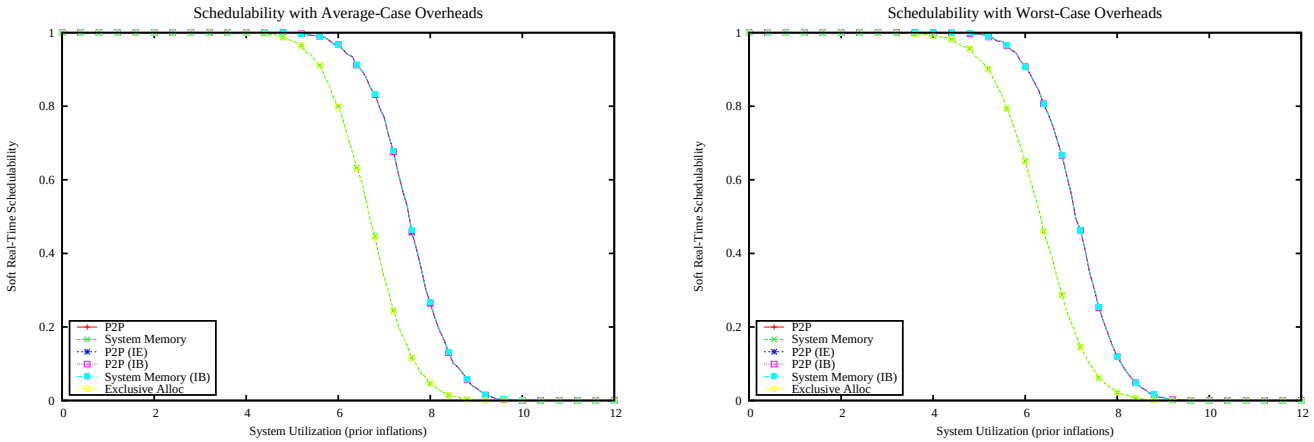

Figure 5510: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

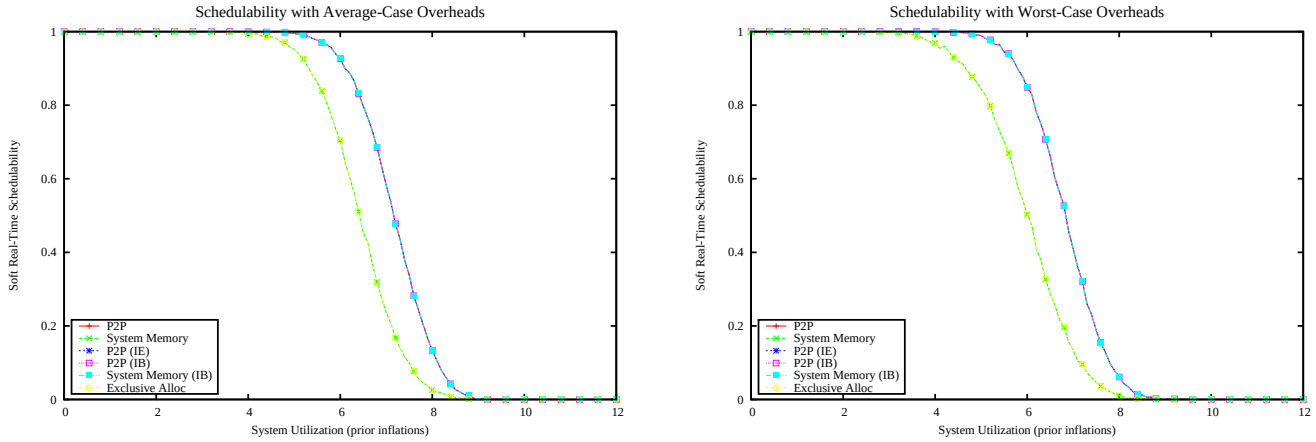

Figure 5511: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

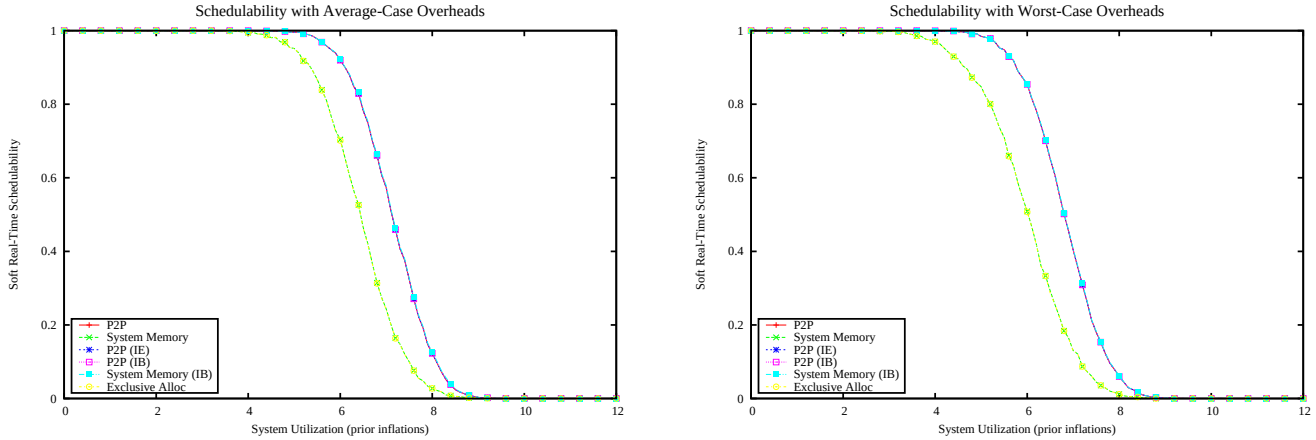

Figure 5512: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

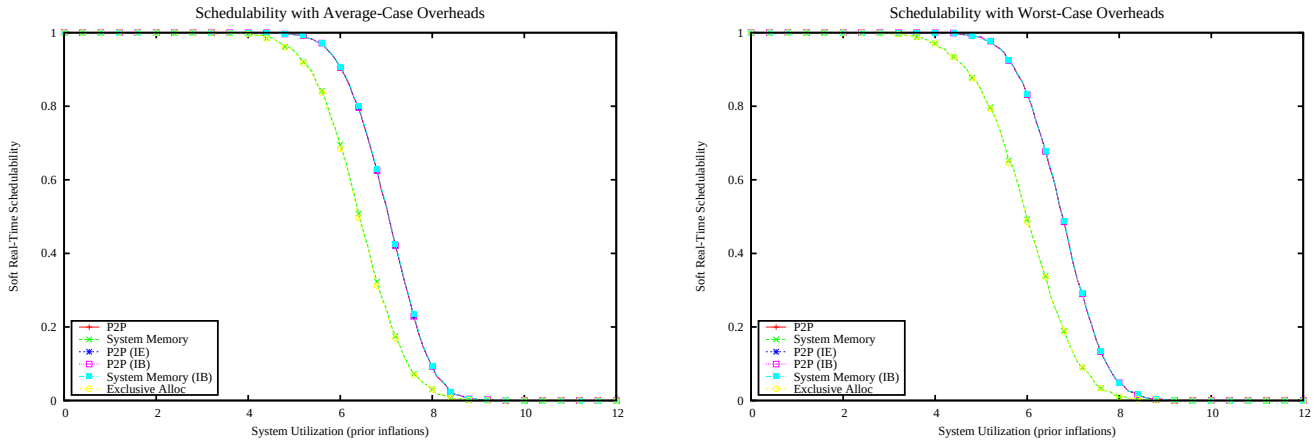

Figure 5513: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

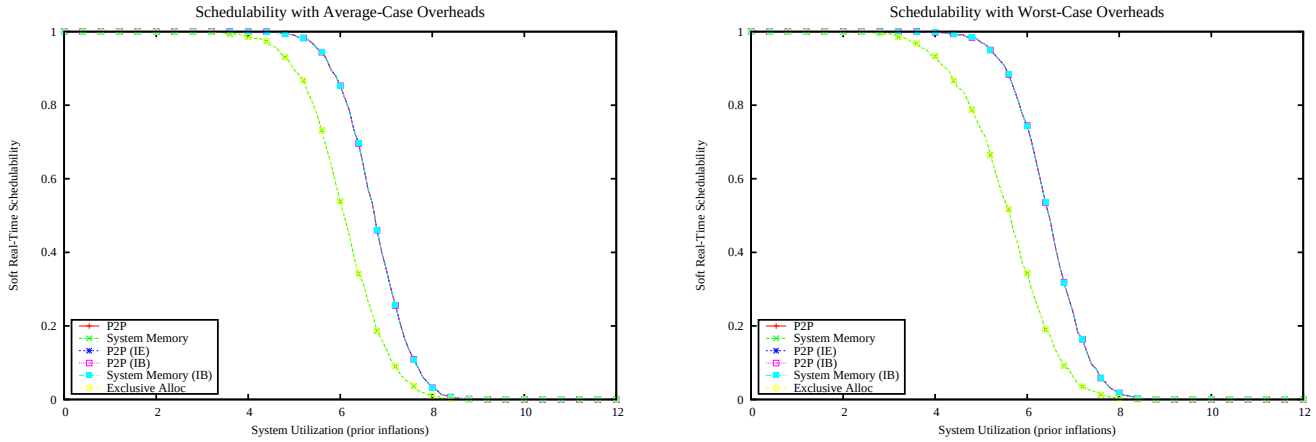

Figure 5514: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

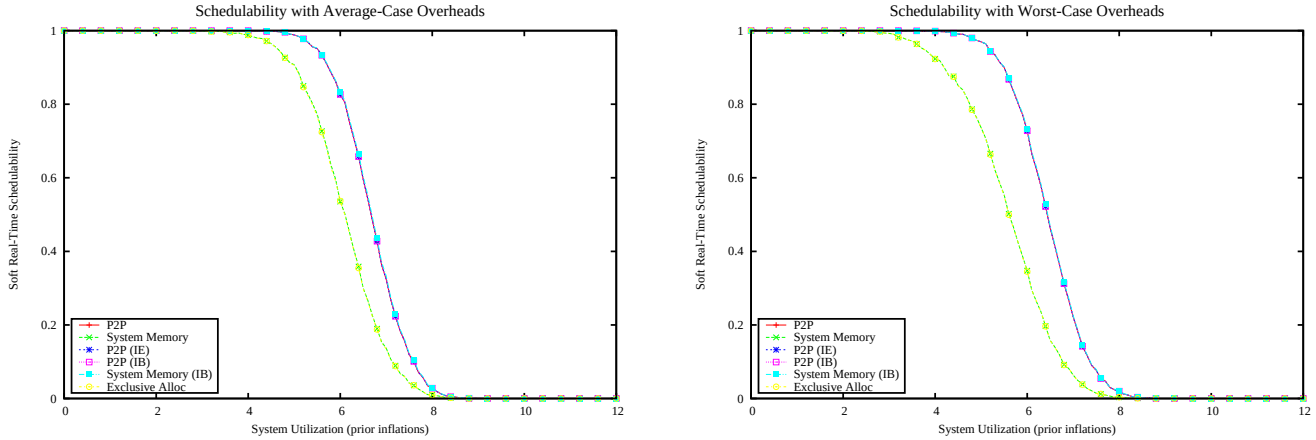

Figure 5515: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

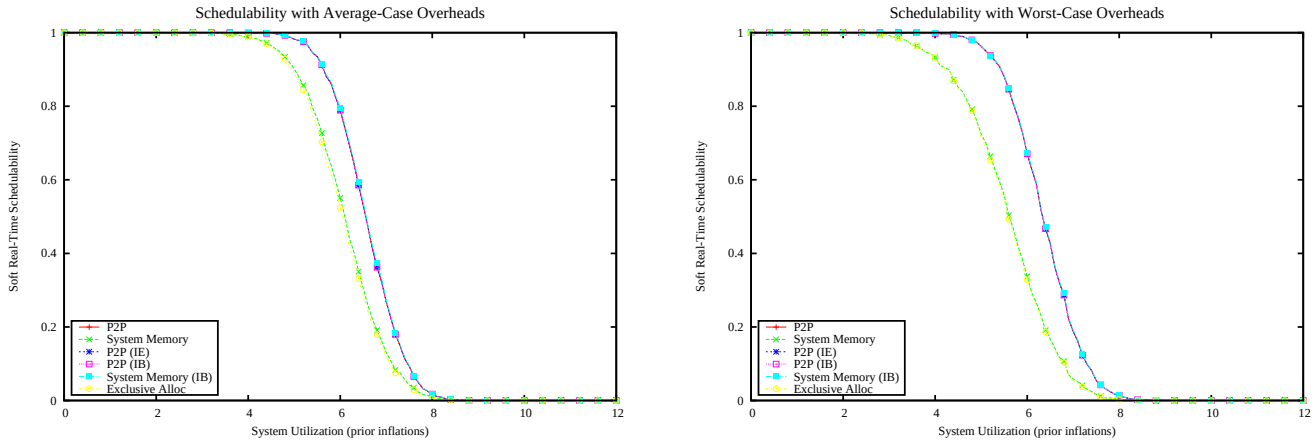

Figure 5516: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

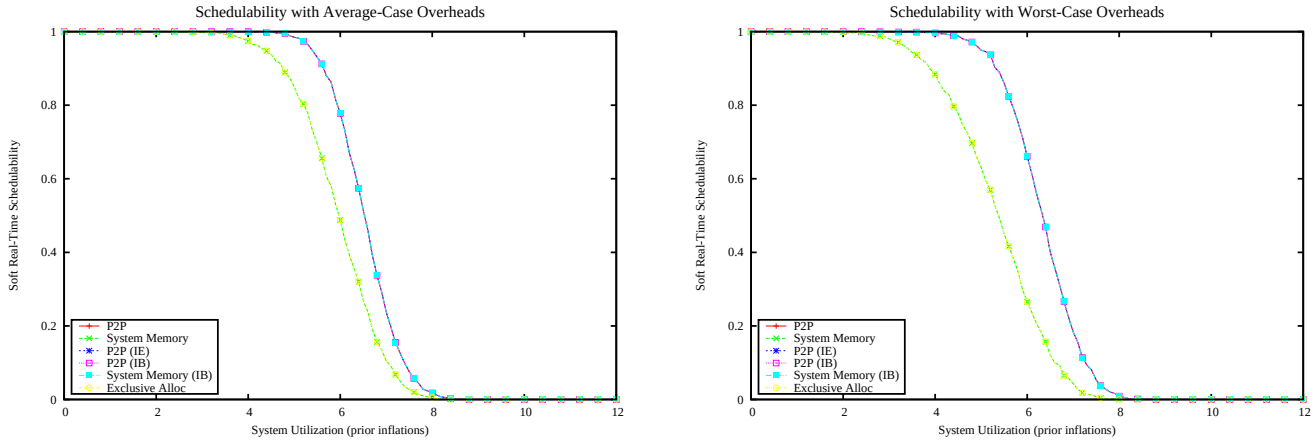

Figure 5517: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

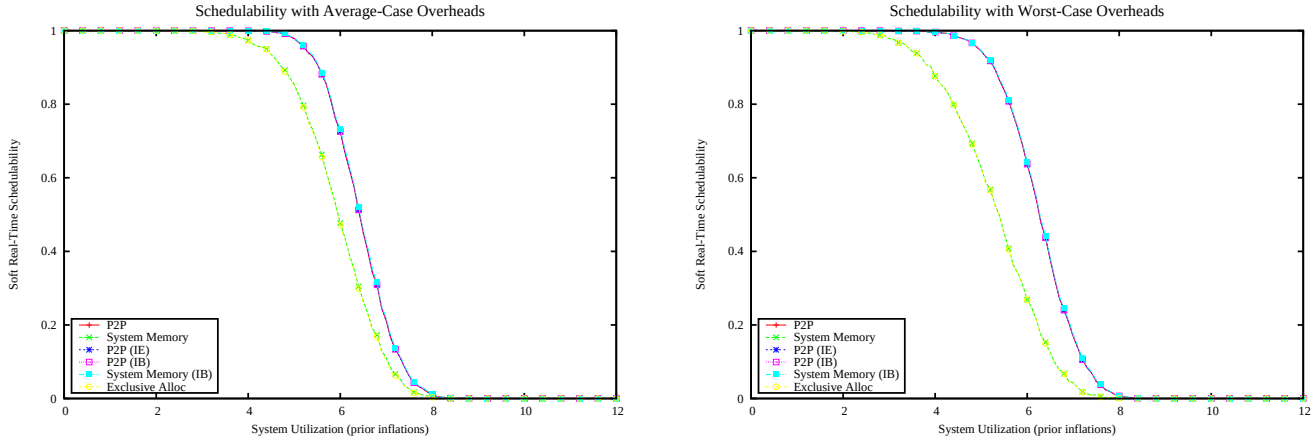

Figure 5518: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

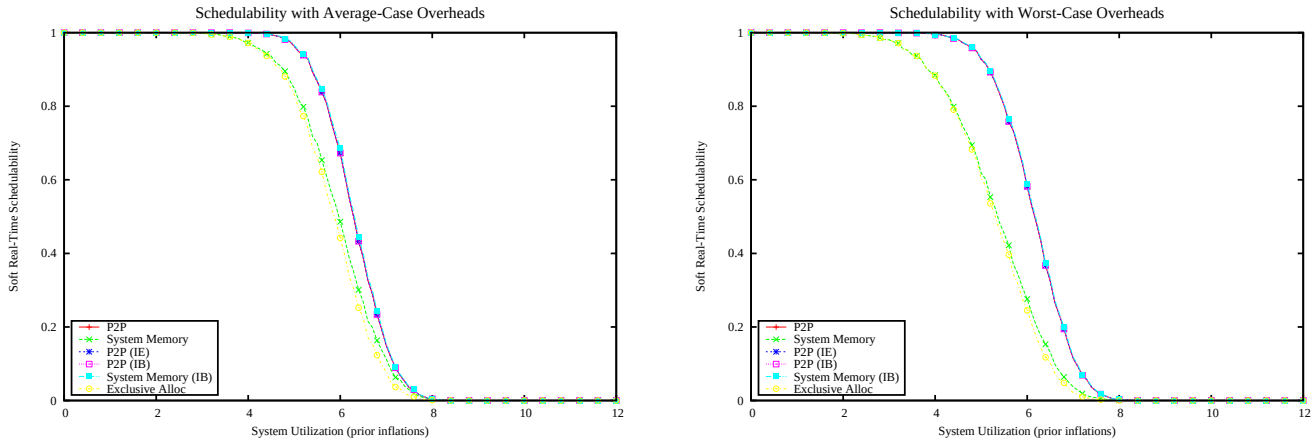

Figure 5519: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

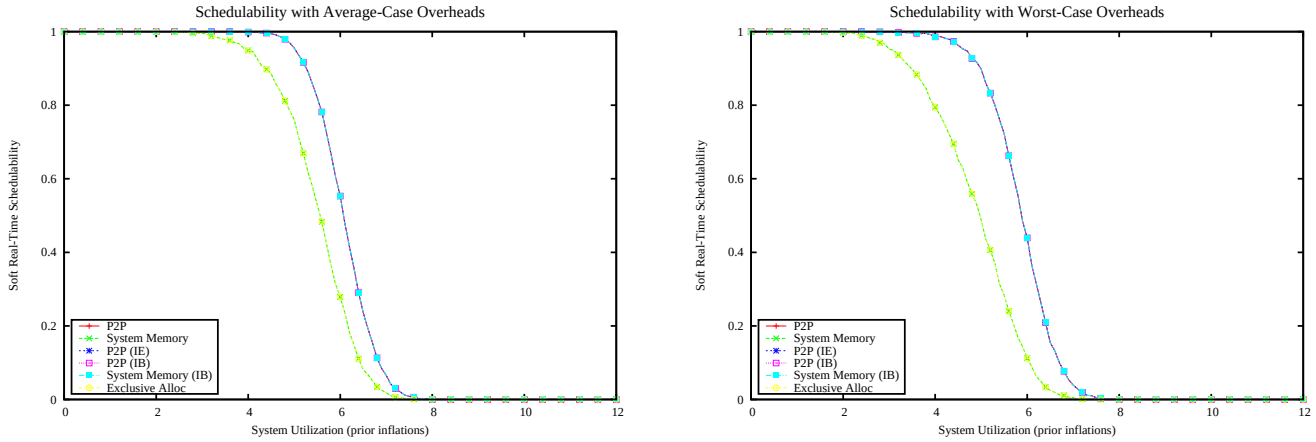

Figure 5520: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

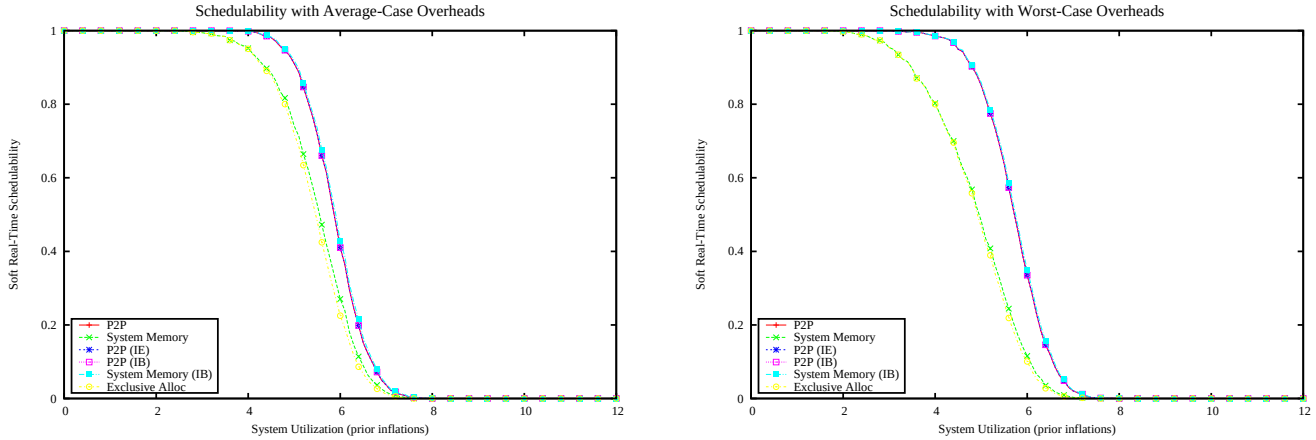

Figure 5521: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

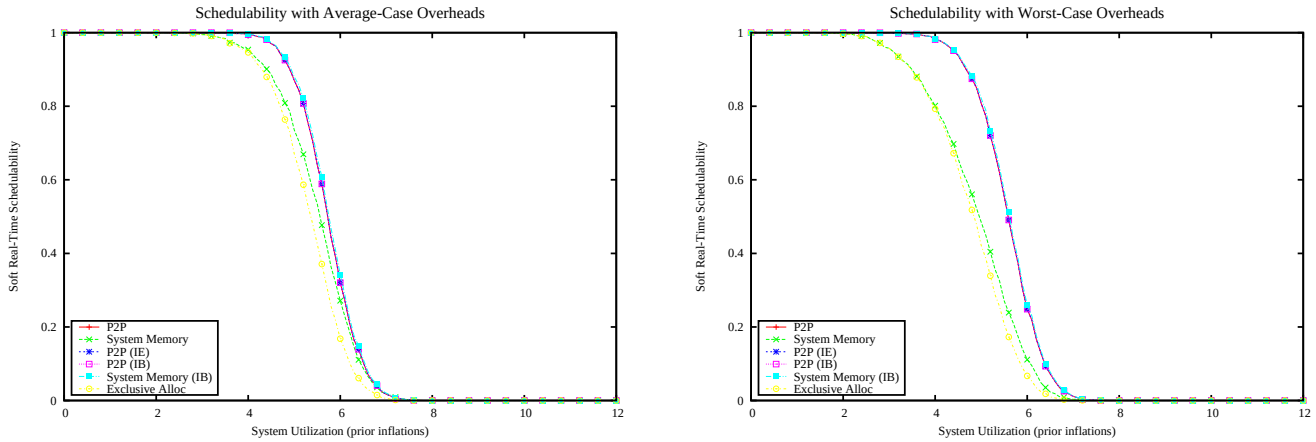

Figure 5522: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

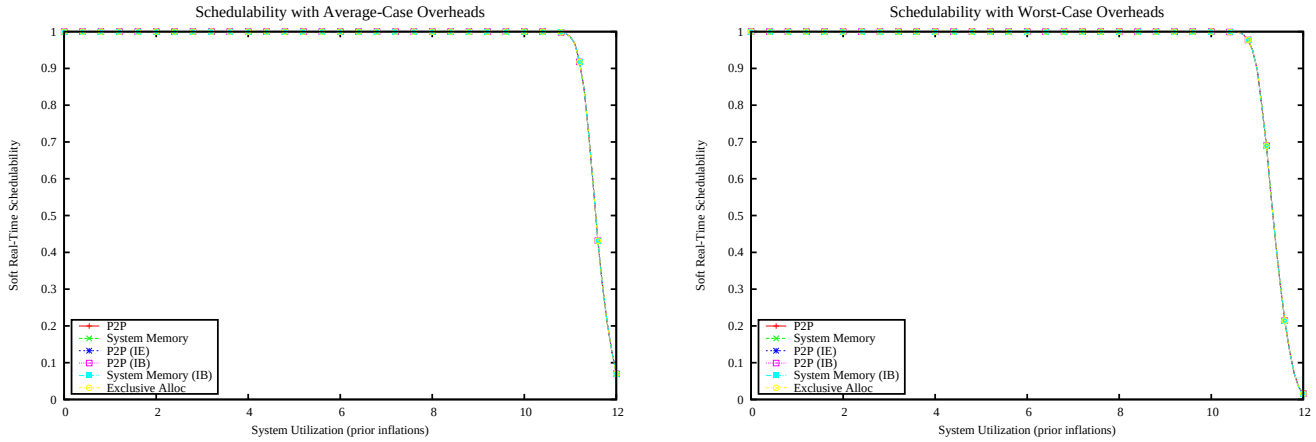

Figure 5523: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

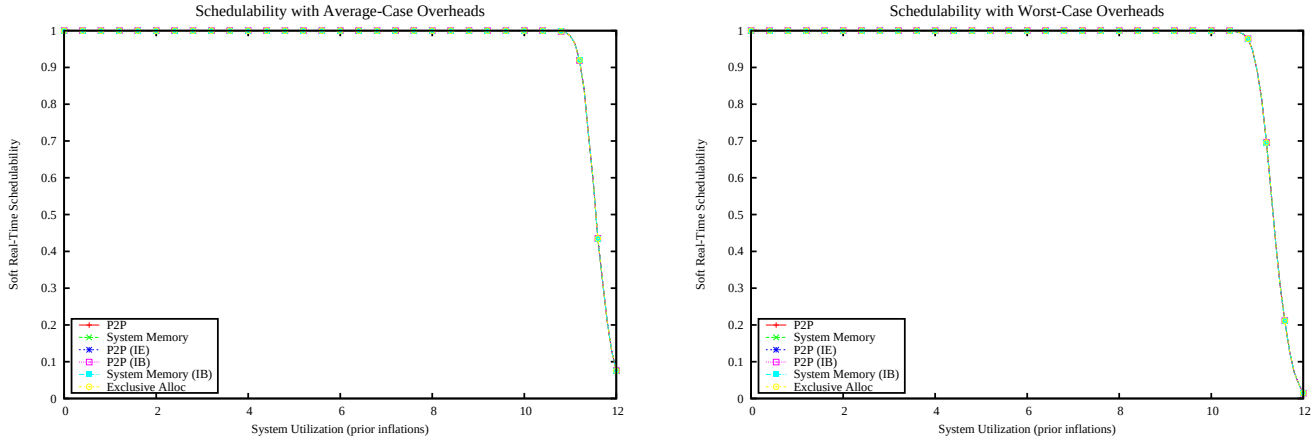

Figure 5524: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

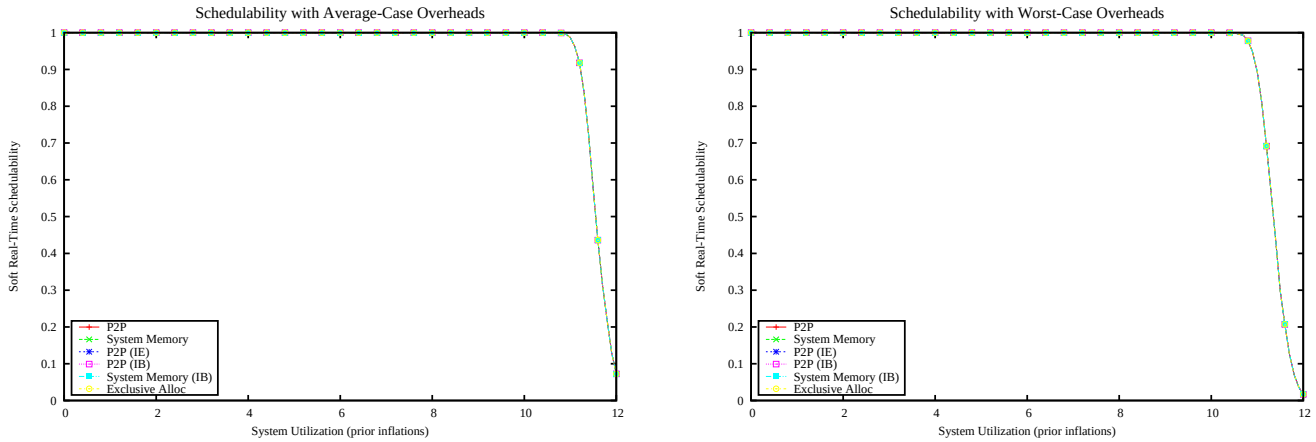

Figure 5525: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

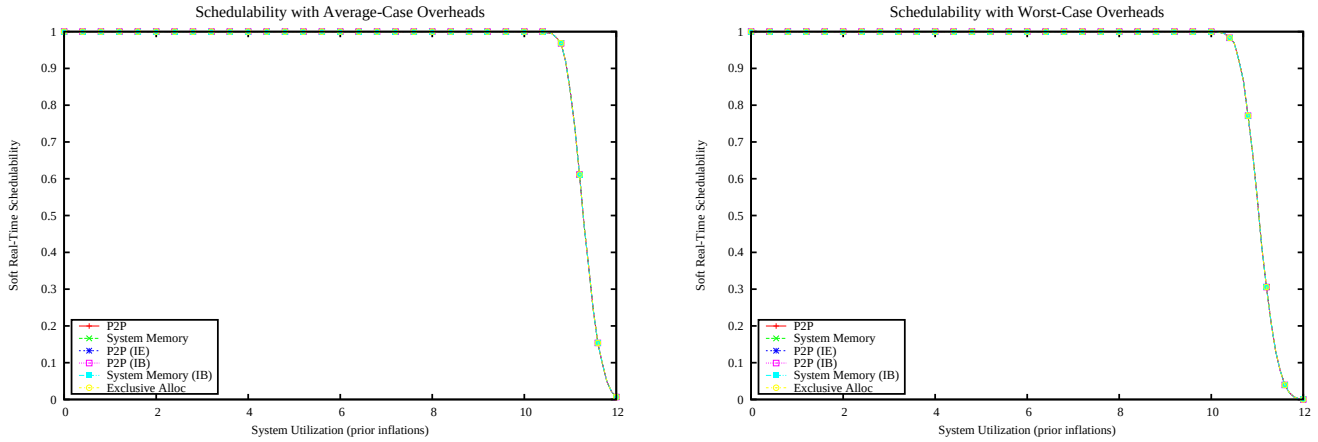

Figure 5526: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

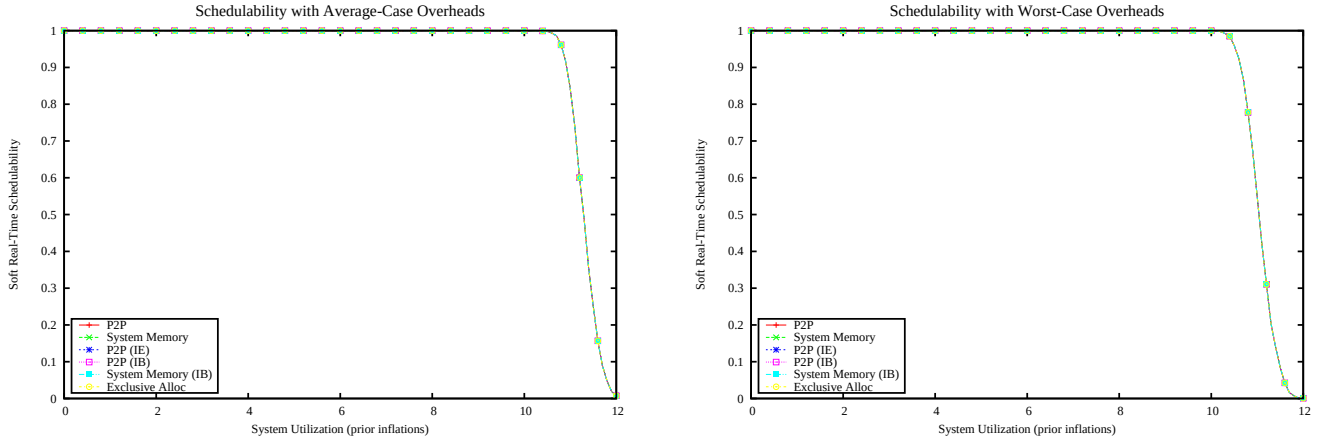

Figure 5527: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

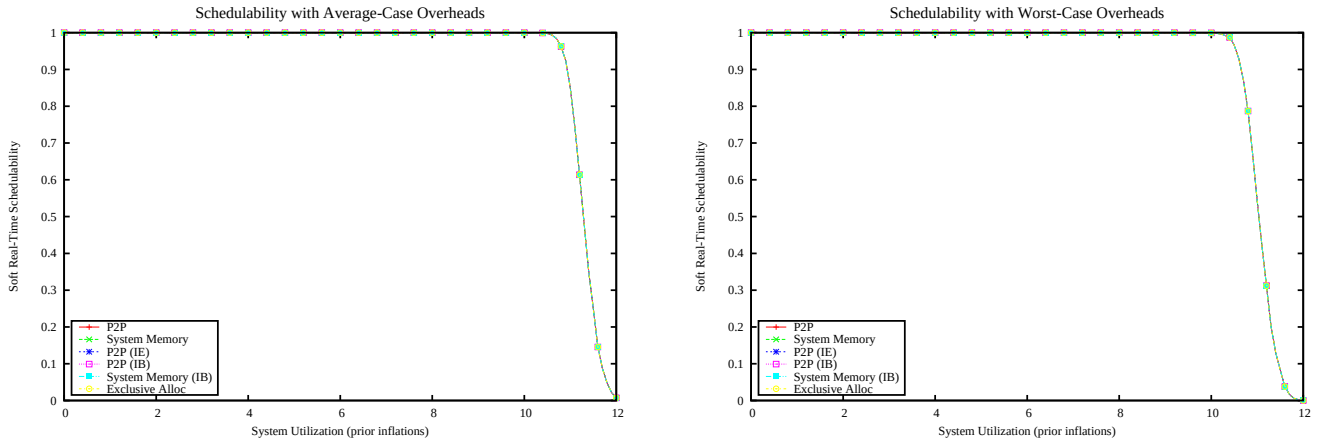

Figure 5528: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

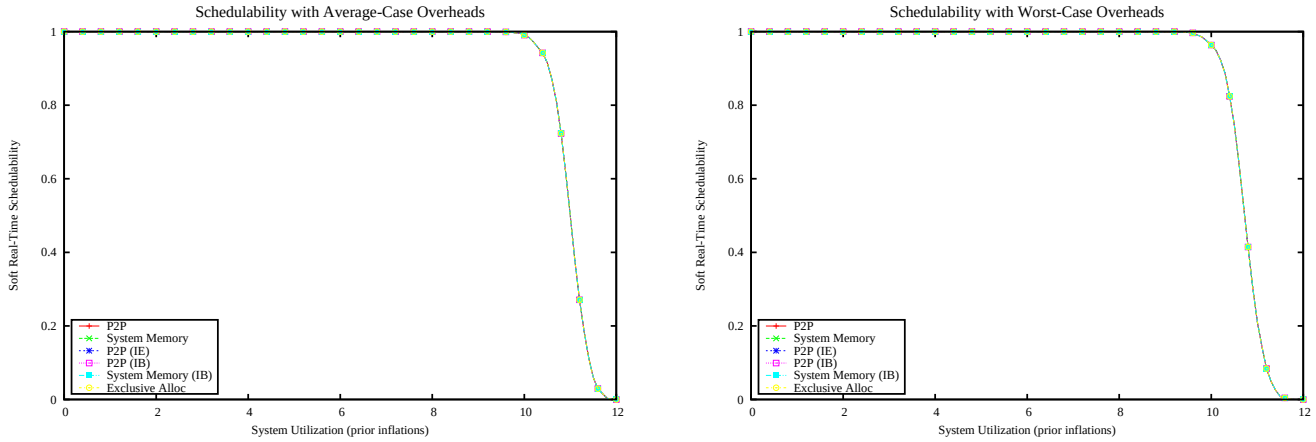

Figure 5529: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

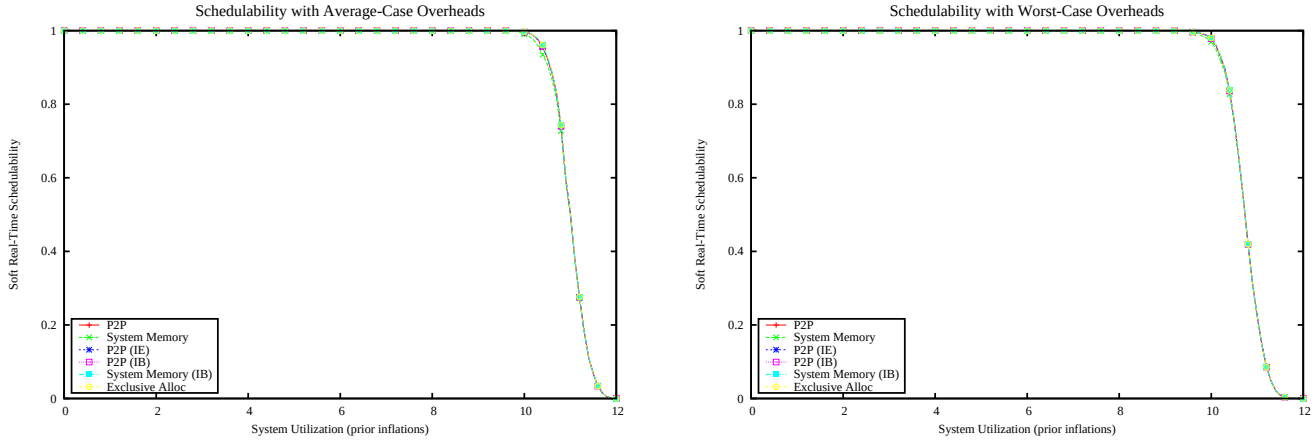

Figure 5530: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

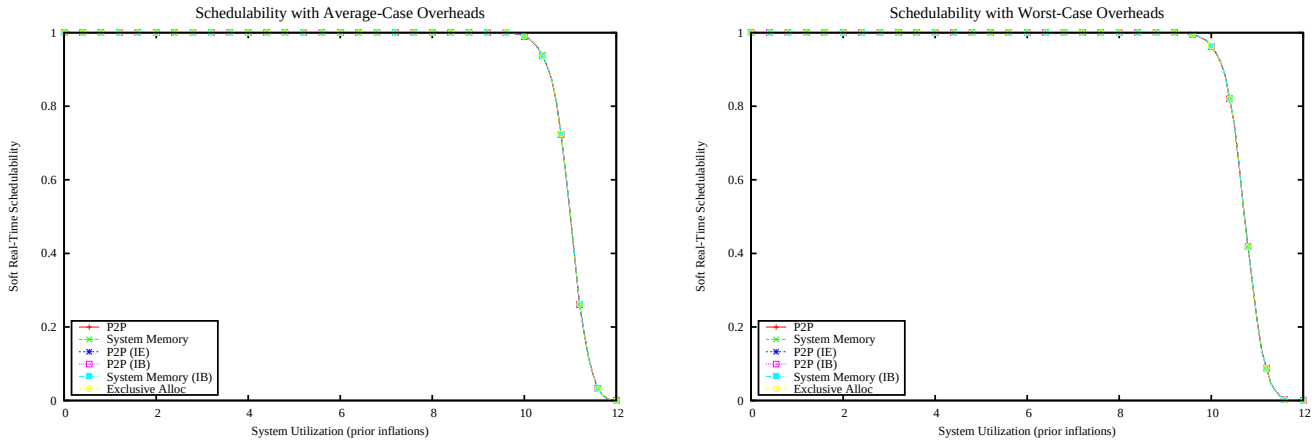

Figure 5531: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

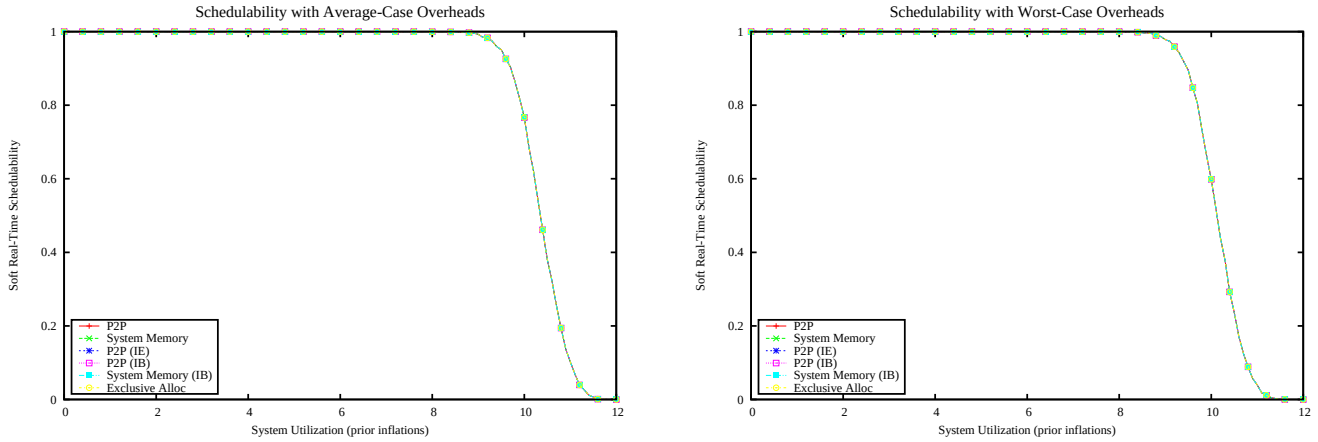

Figure 5532: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

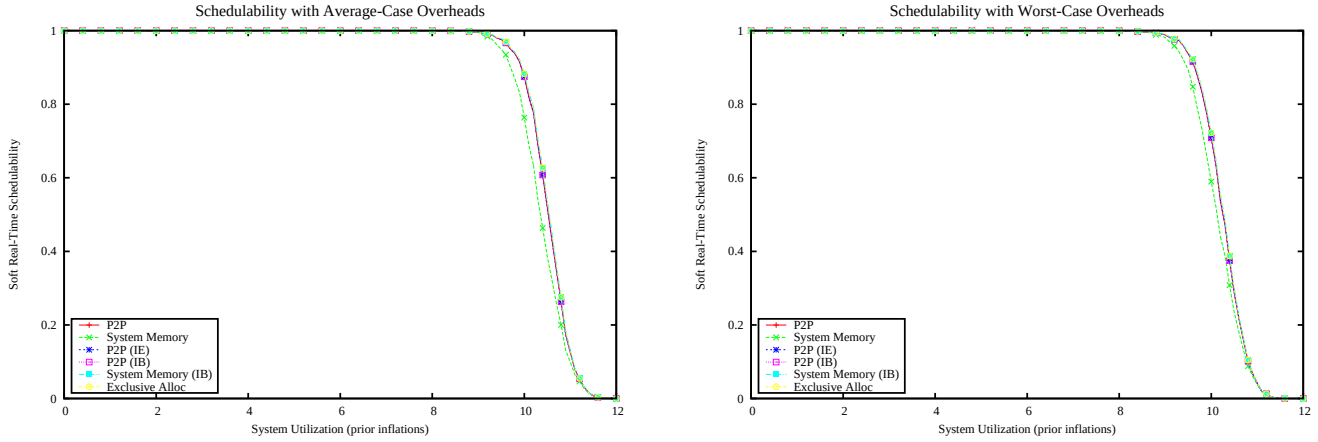

Figure 5533: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

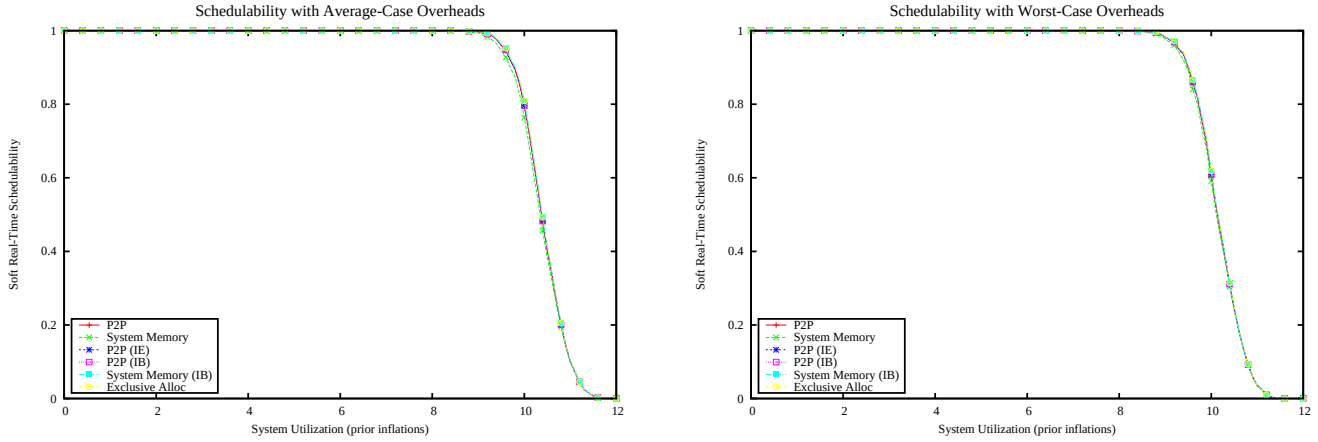

Figure 5534: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

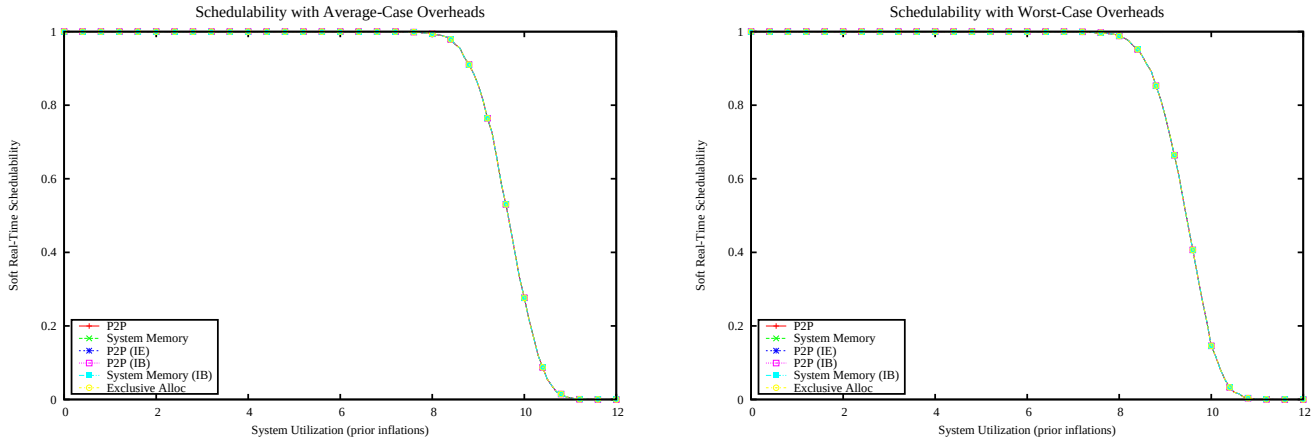

Figure 5535: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

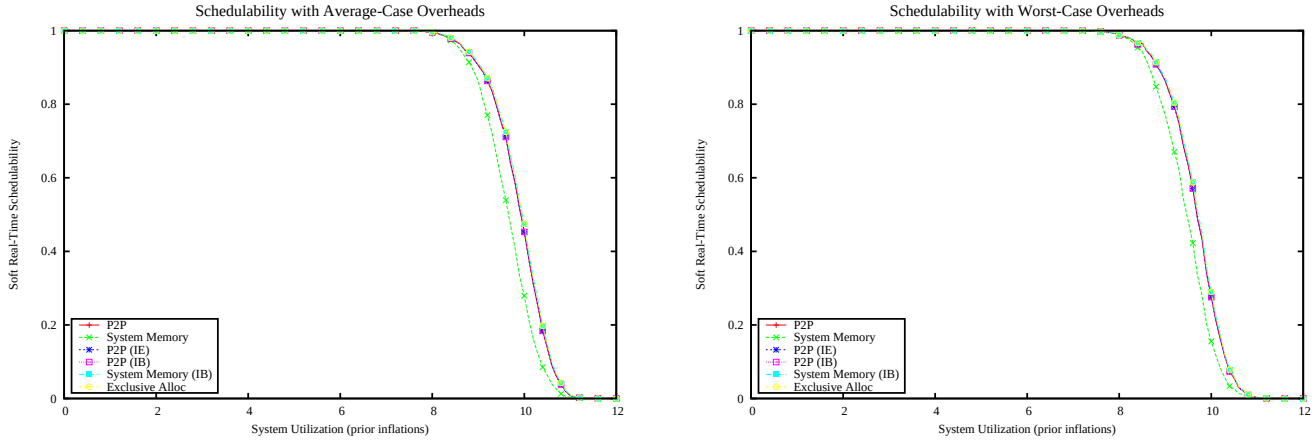

Figure 5536: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

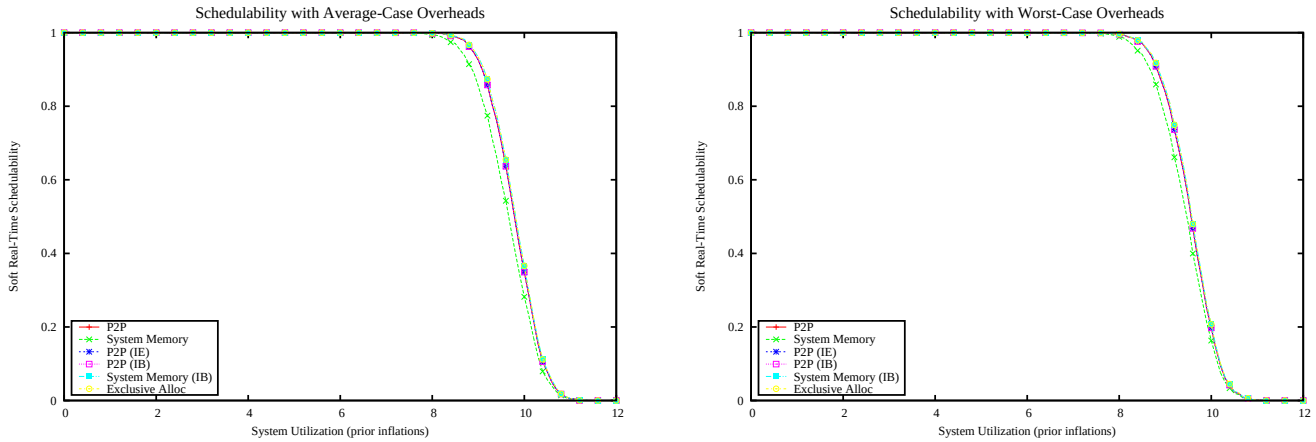

Figure 5537: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

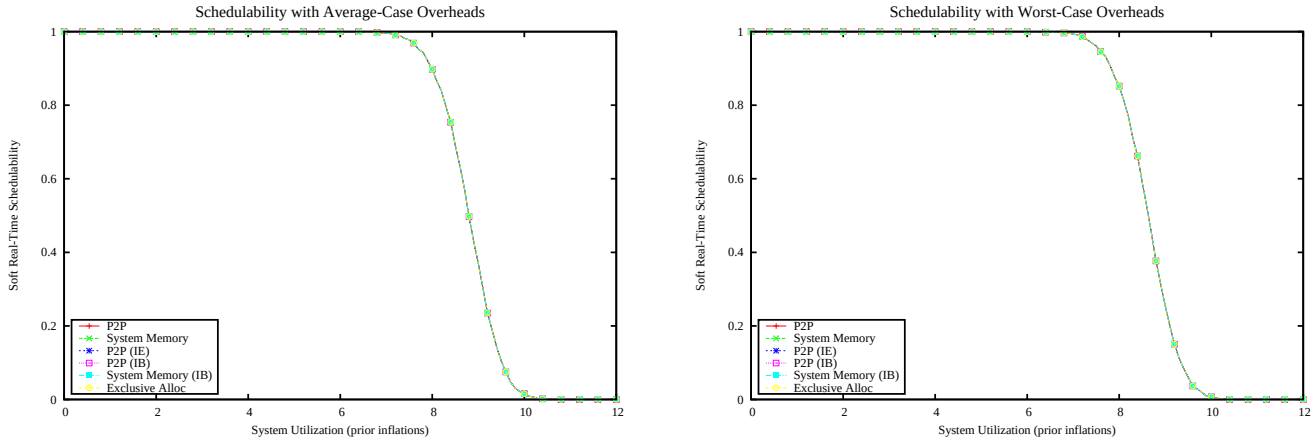

Figure 5538: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

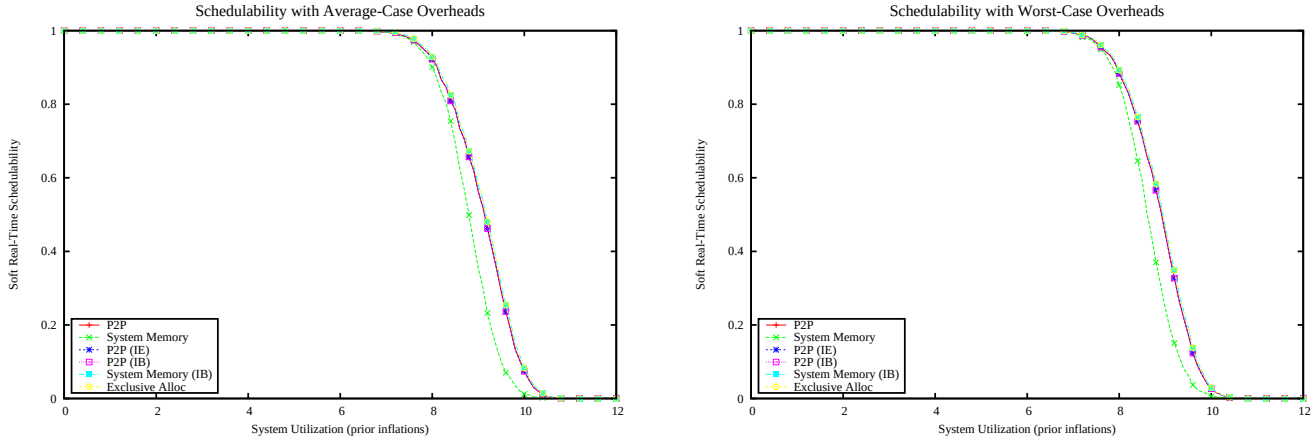

Figure 5539: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

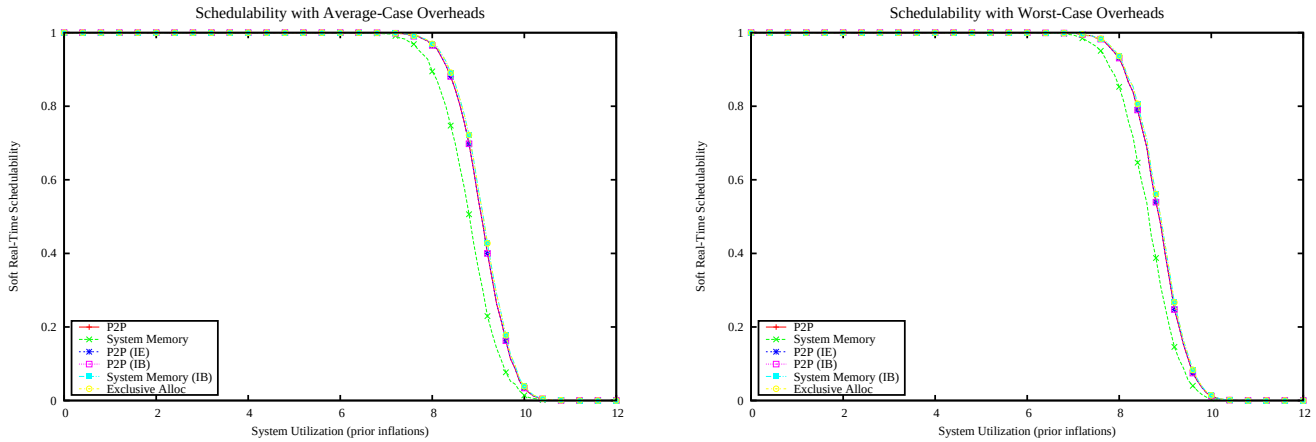

Figure 5540: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

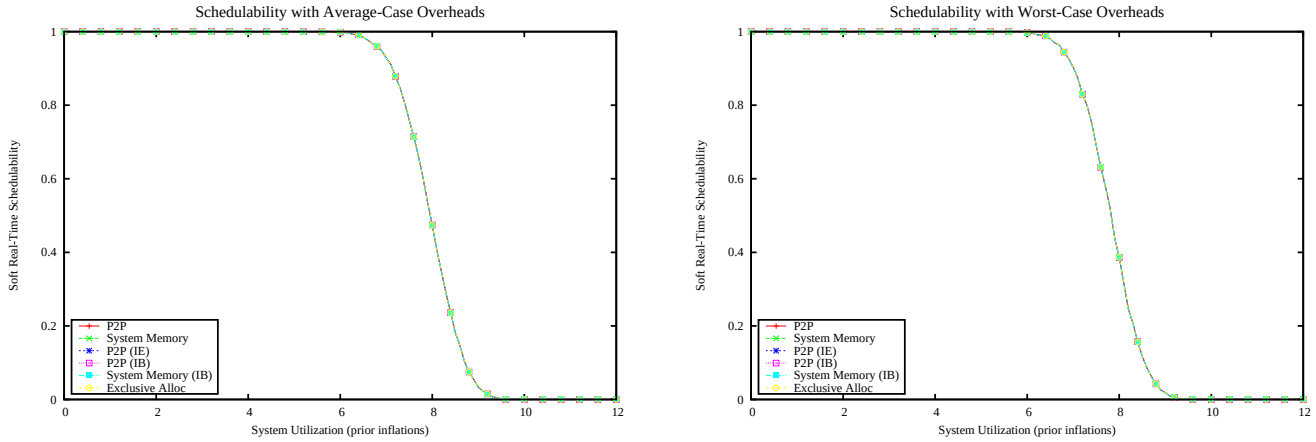

Figure 5541: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

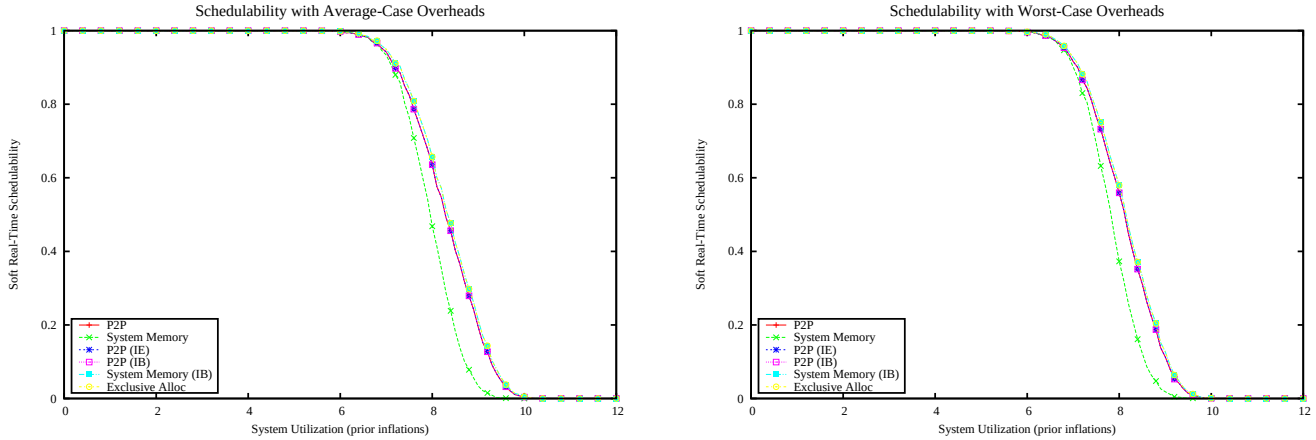

Figure 5542: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

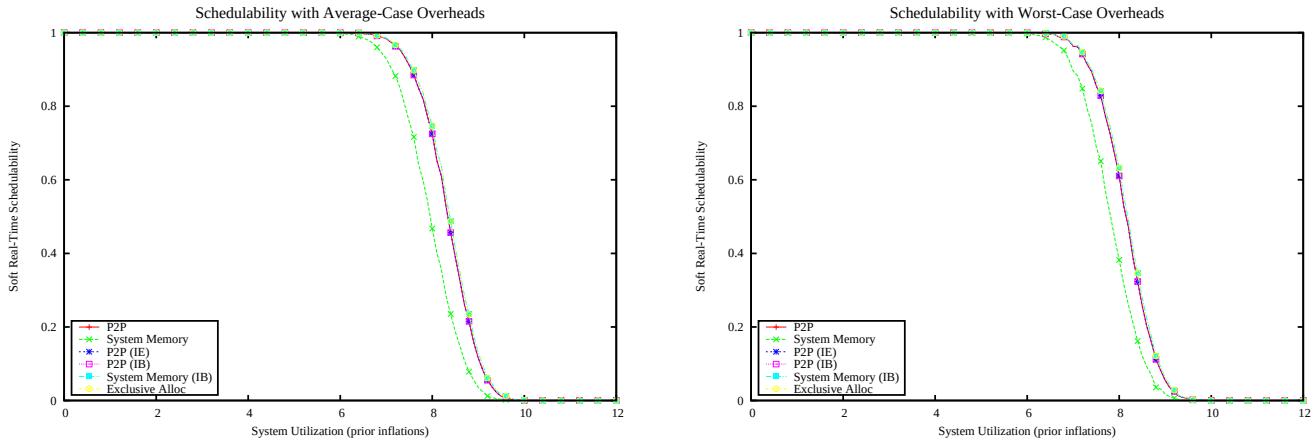

Figure 5543: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

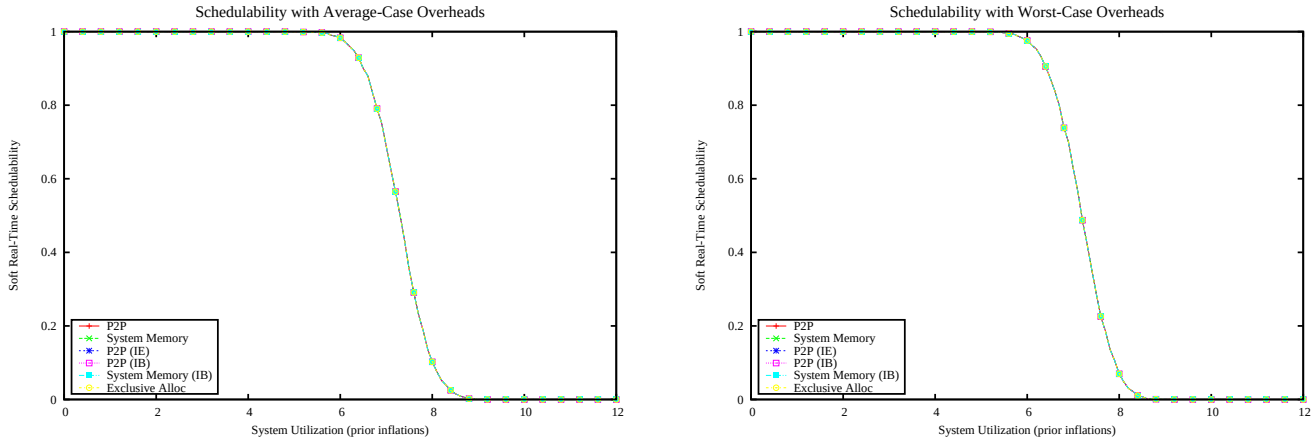

Figure 5544: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

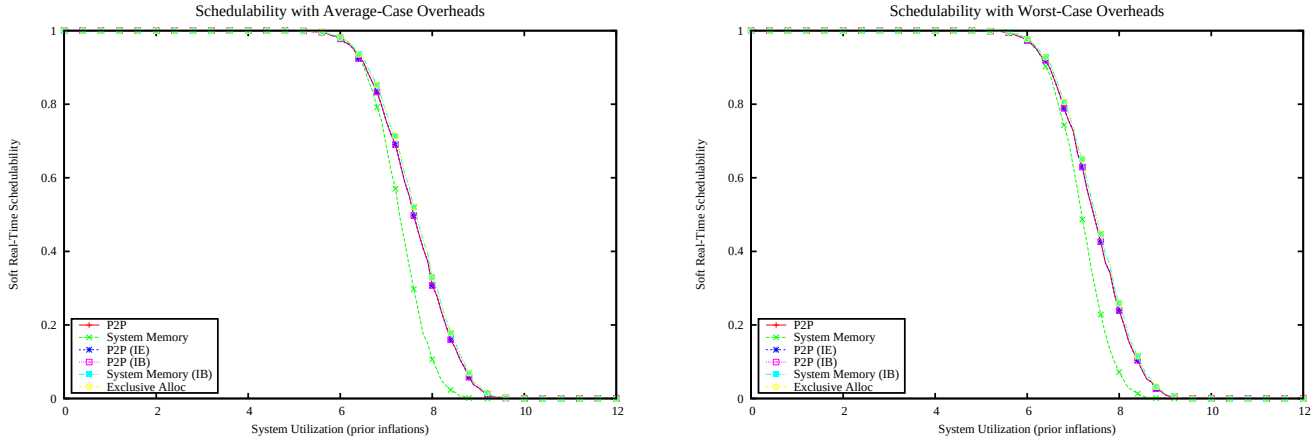

Figure 5545: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

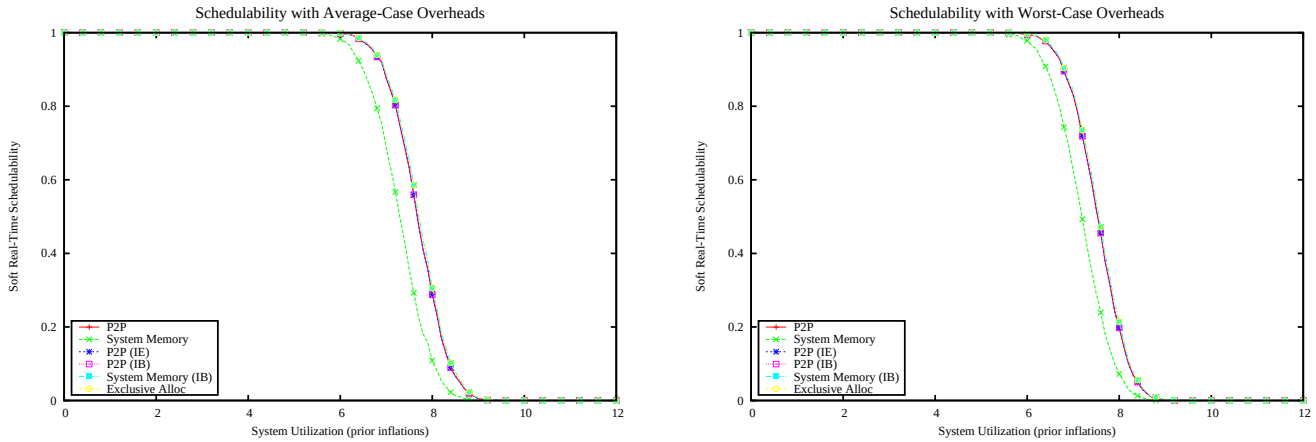

Figure 5546: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

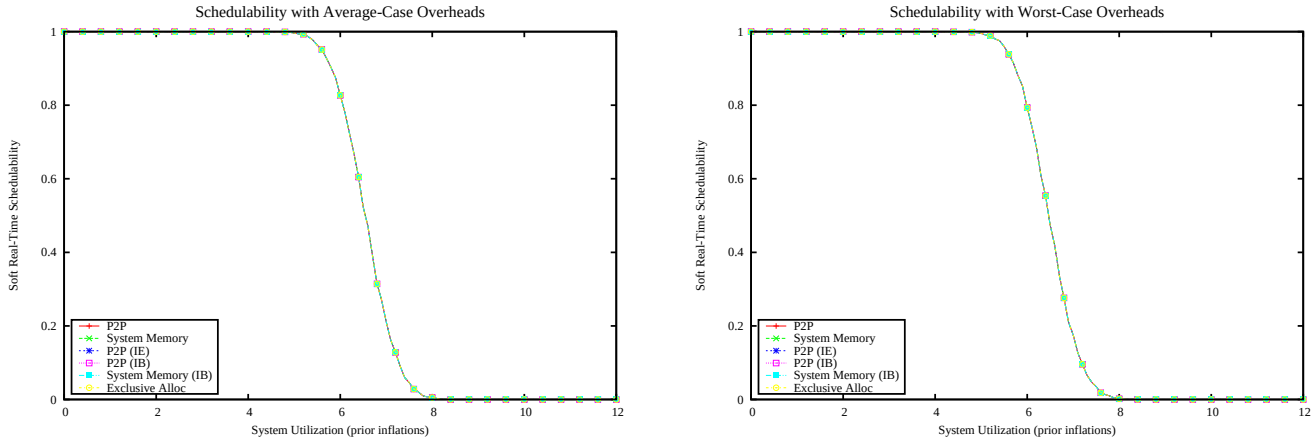

Figure 5547: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

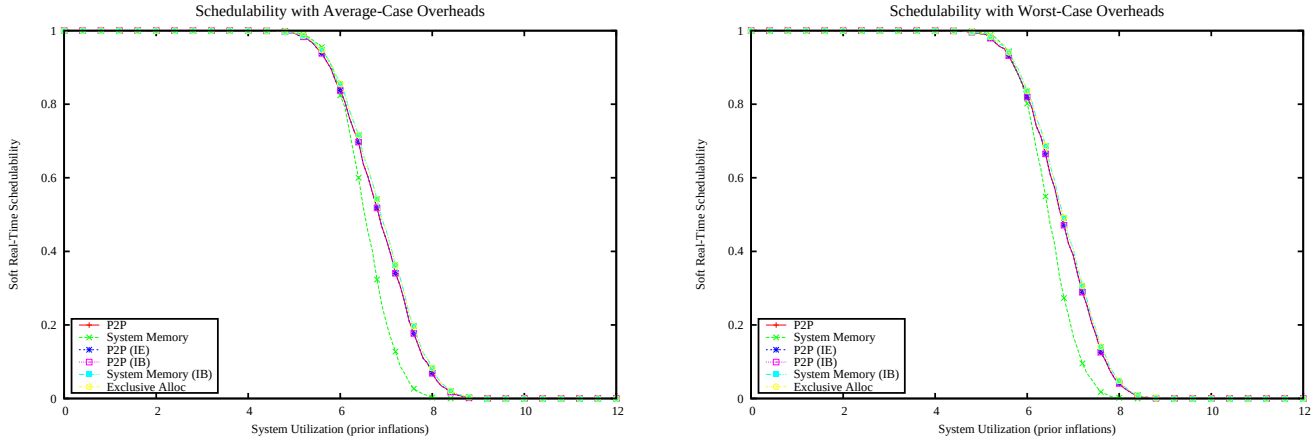

Figure 5548: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

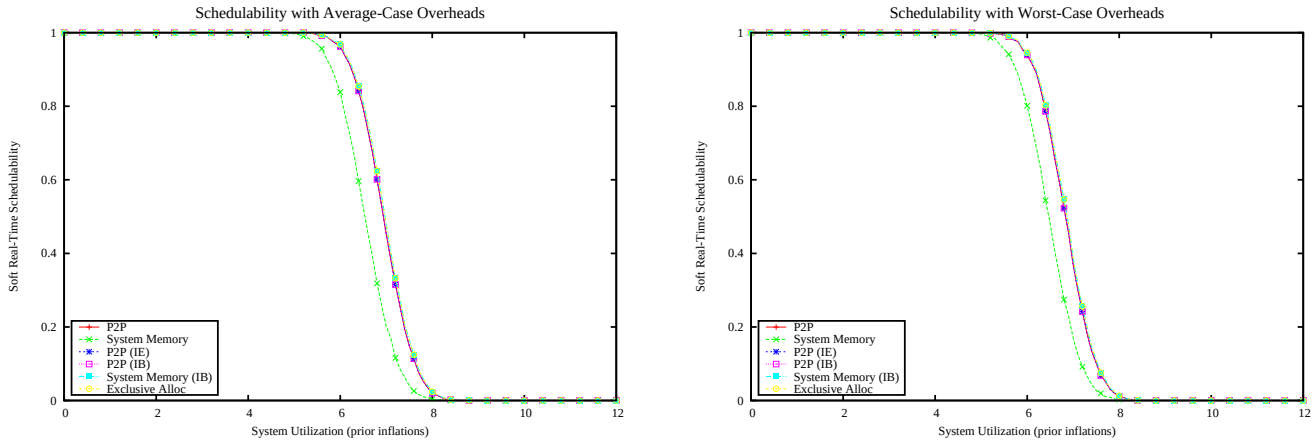

Figure 5549: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

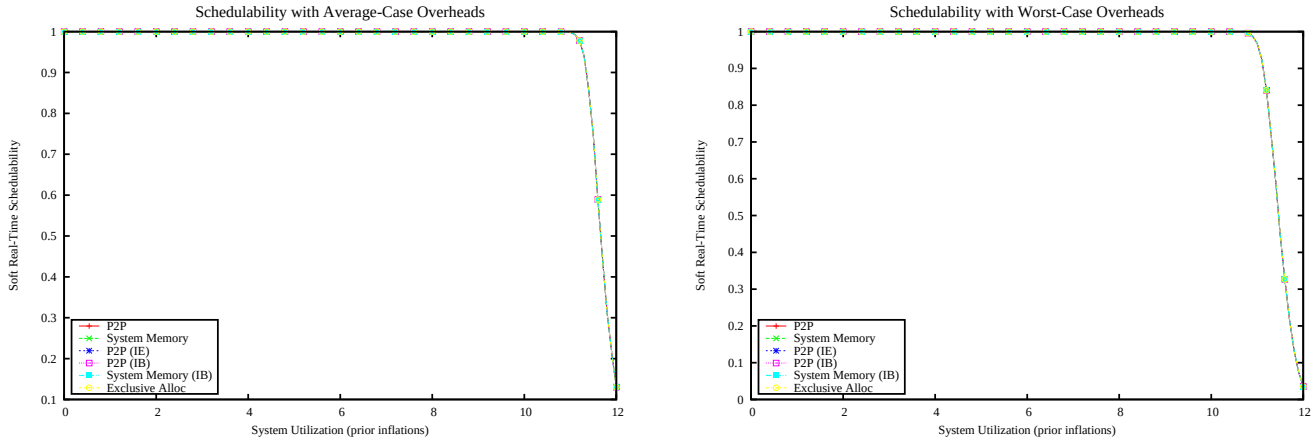

Figure 5550: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

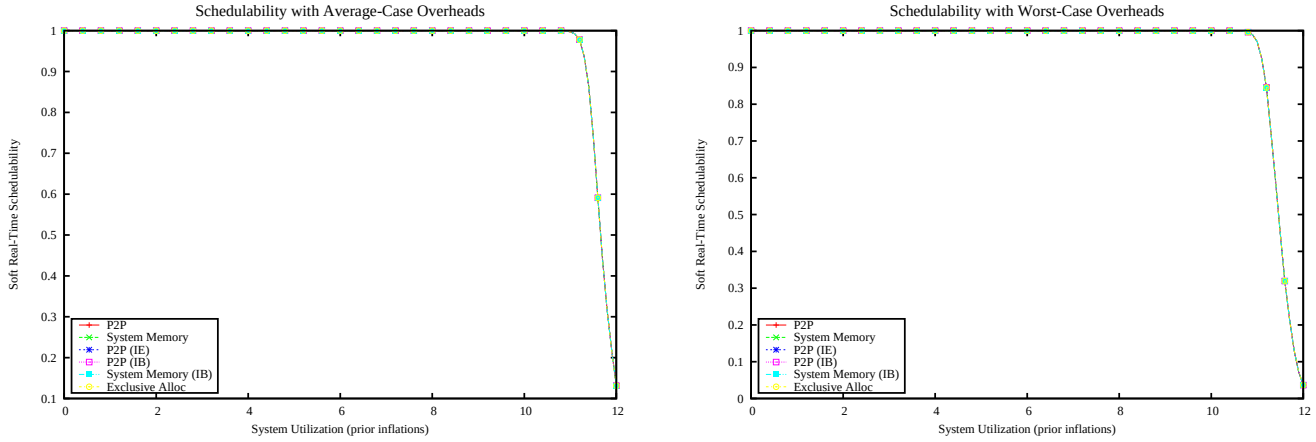

Figure 5551: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

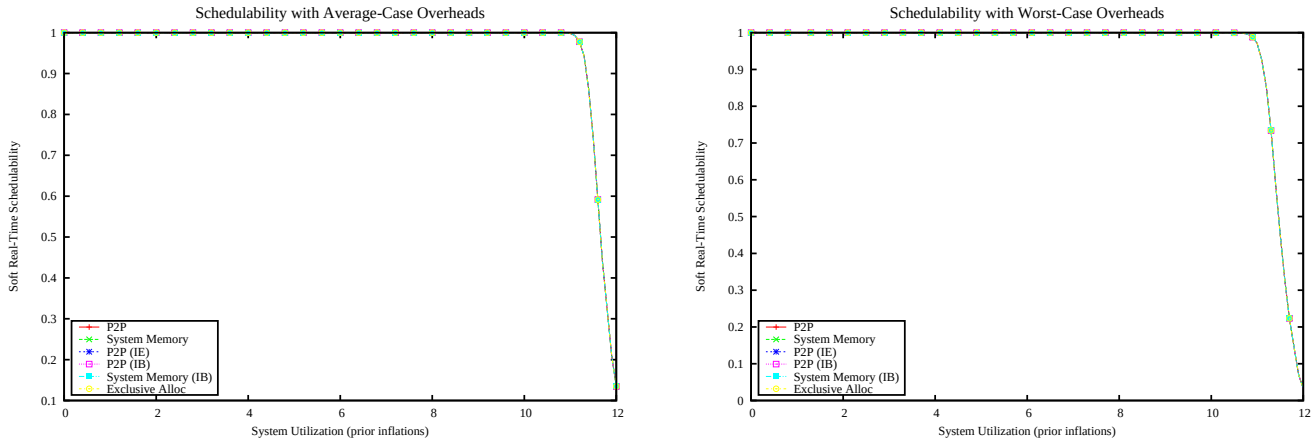

Figure 5552: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

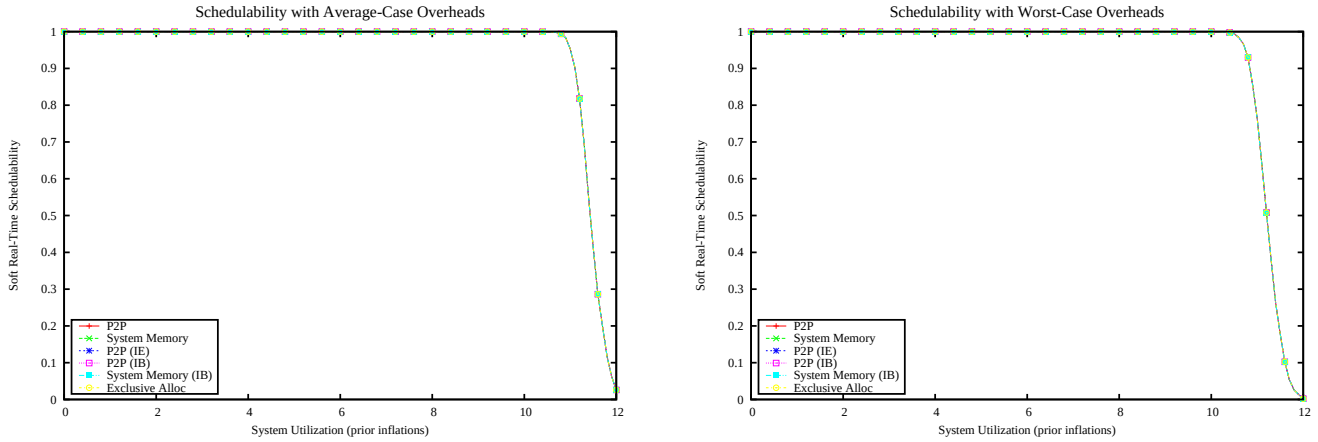

Figure 5553: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

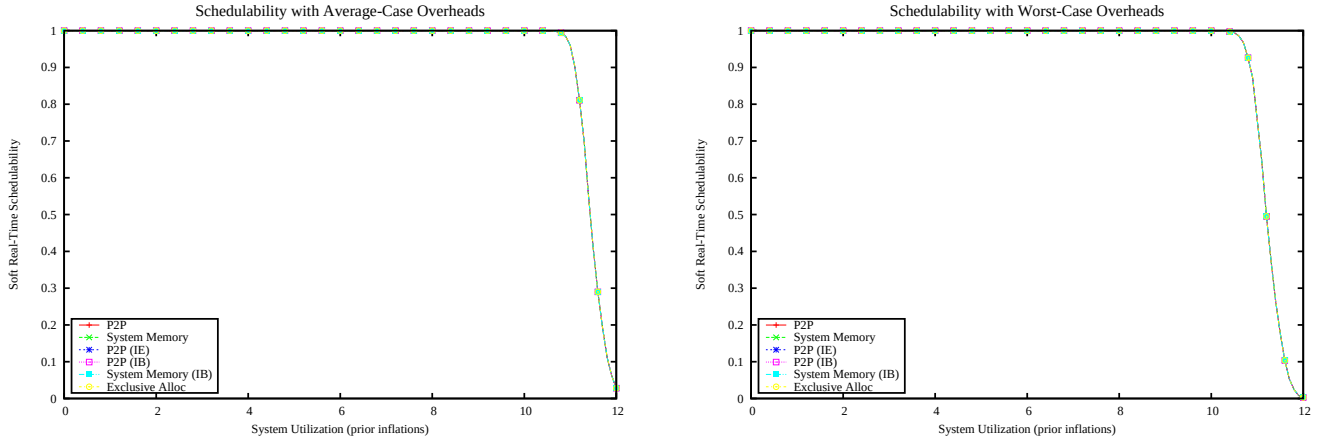

Figure 5554: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

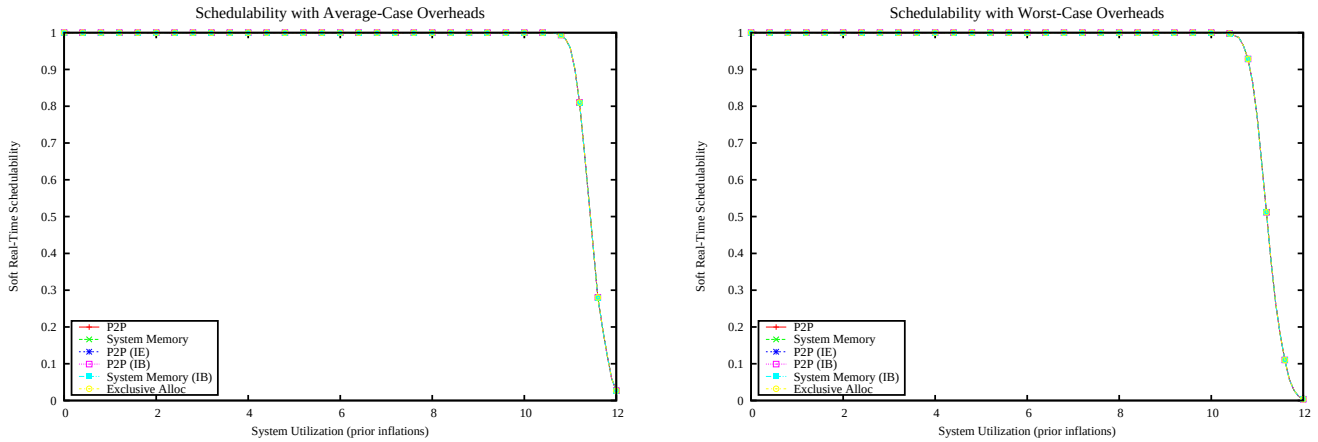

Figure 5555: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

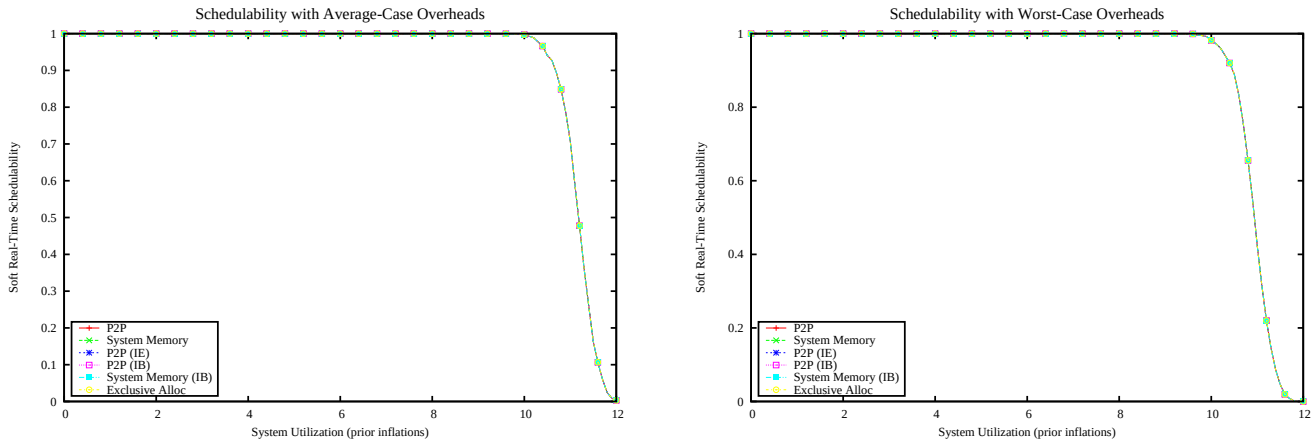

Figure 5556: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

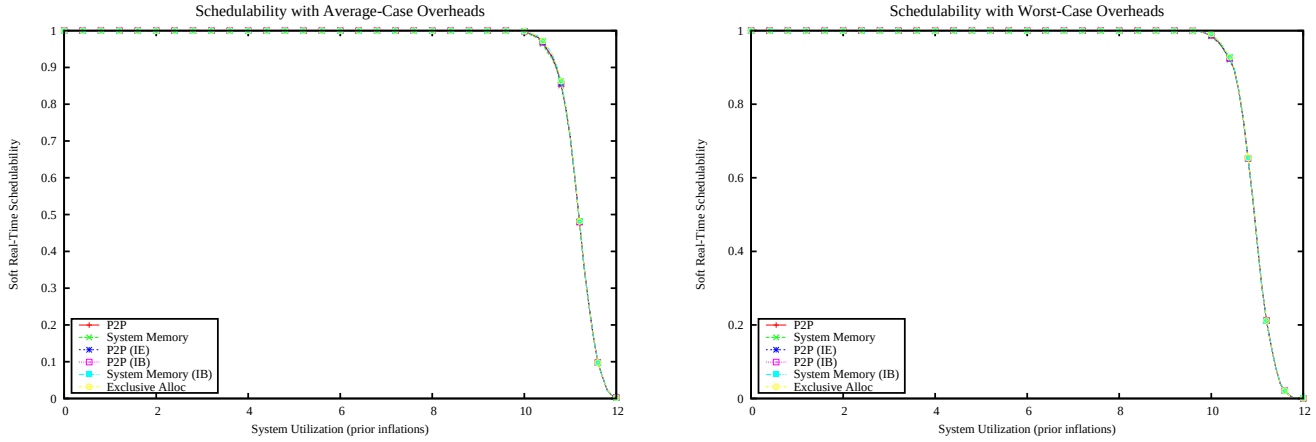

Figure 5557: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

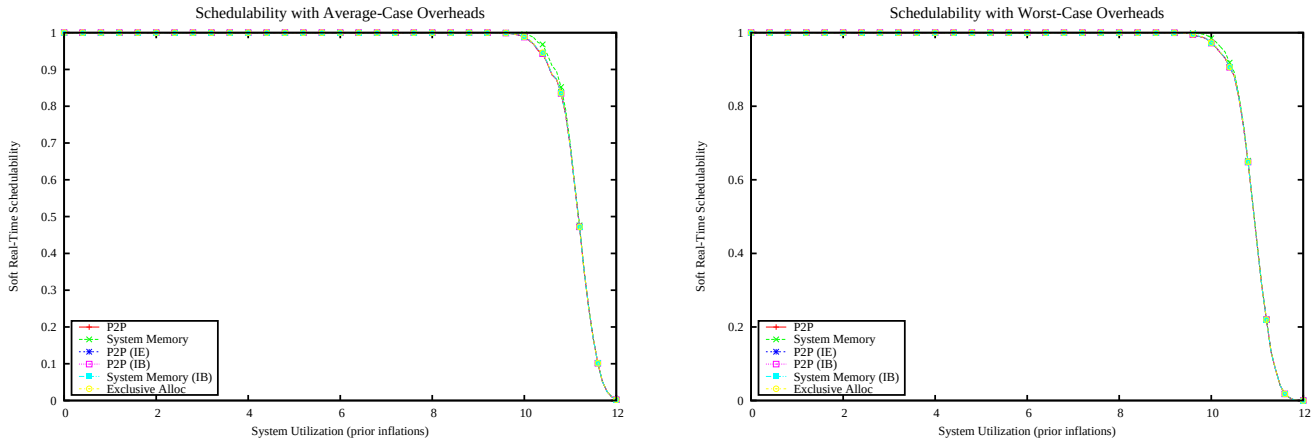

Figure 5558: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

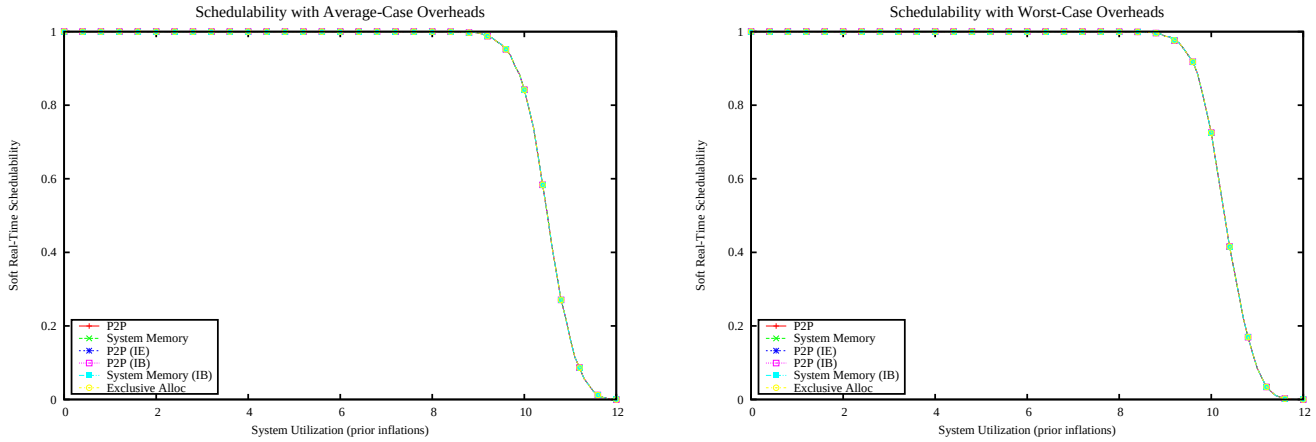

Figure 5559: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

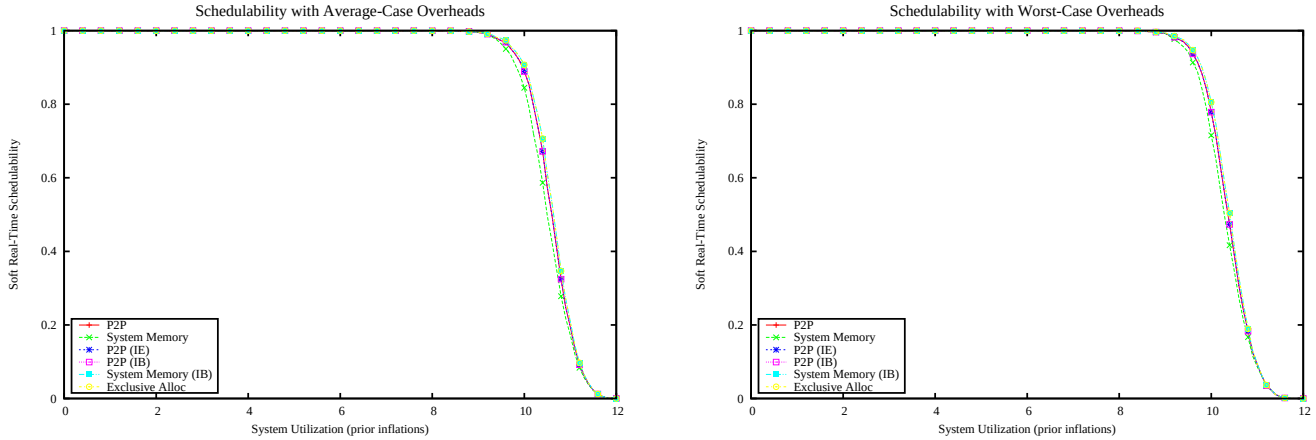

Figure 5560: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

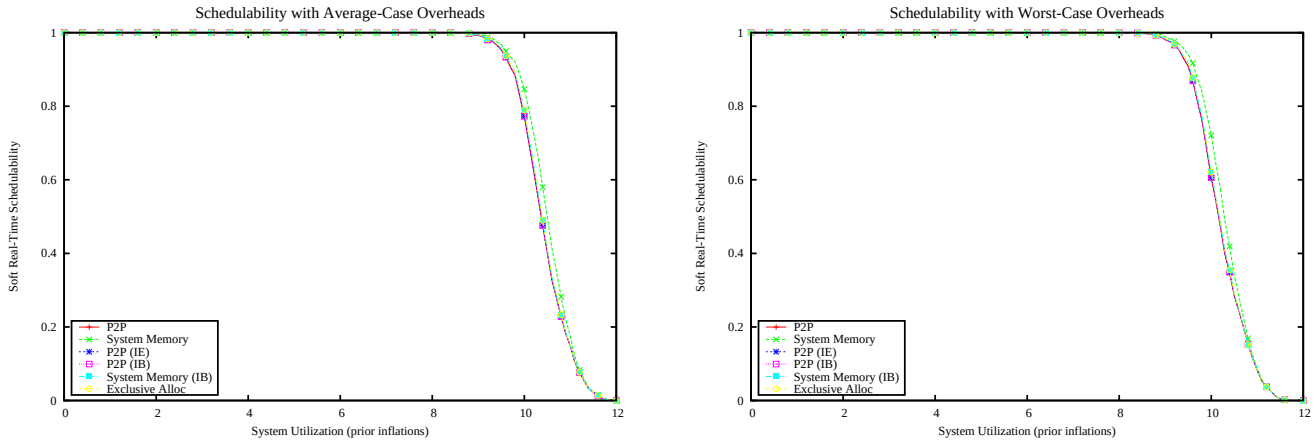

Figure 5561: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

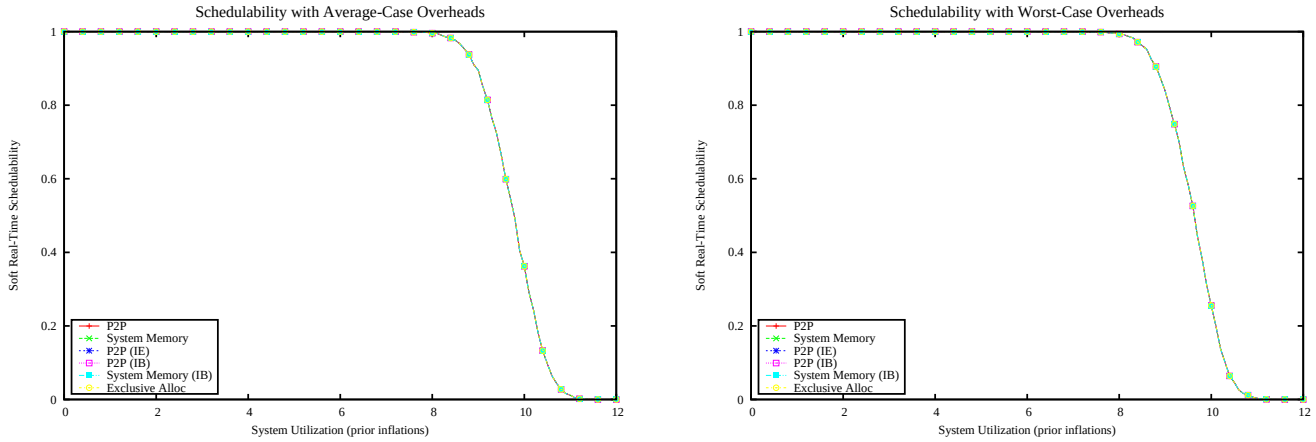

Figure 5562: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

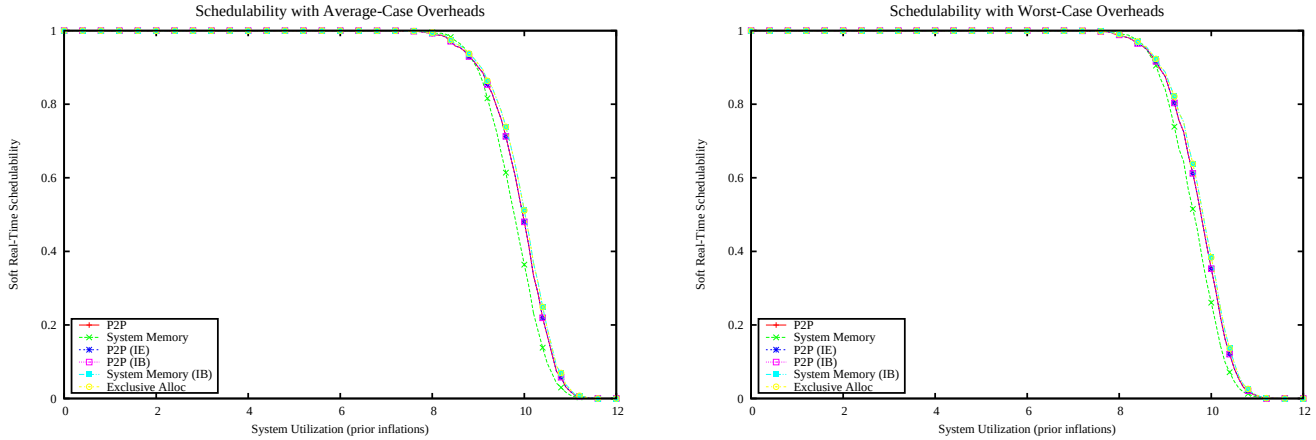

Figure 5563: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

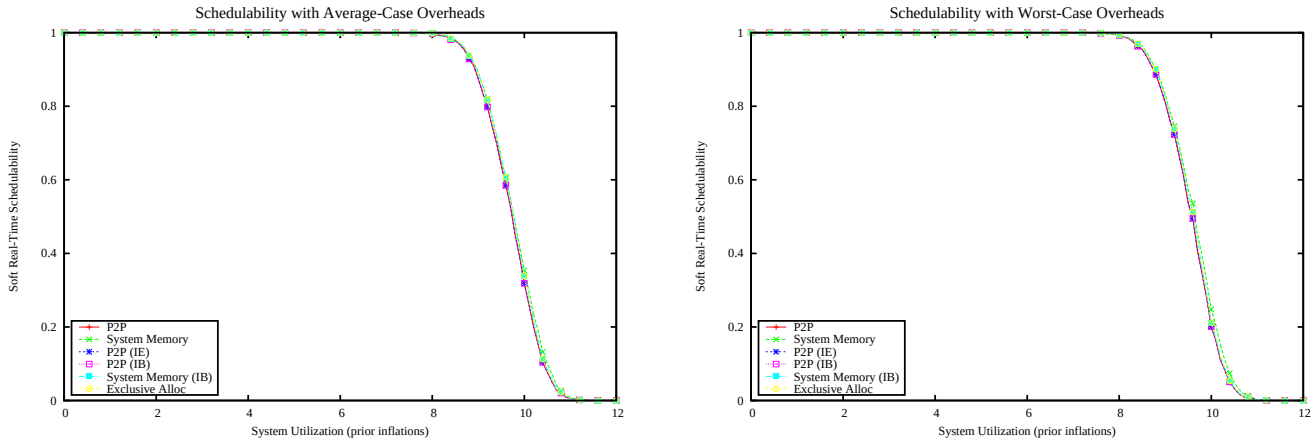

Figure 5564: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

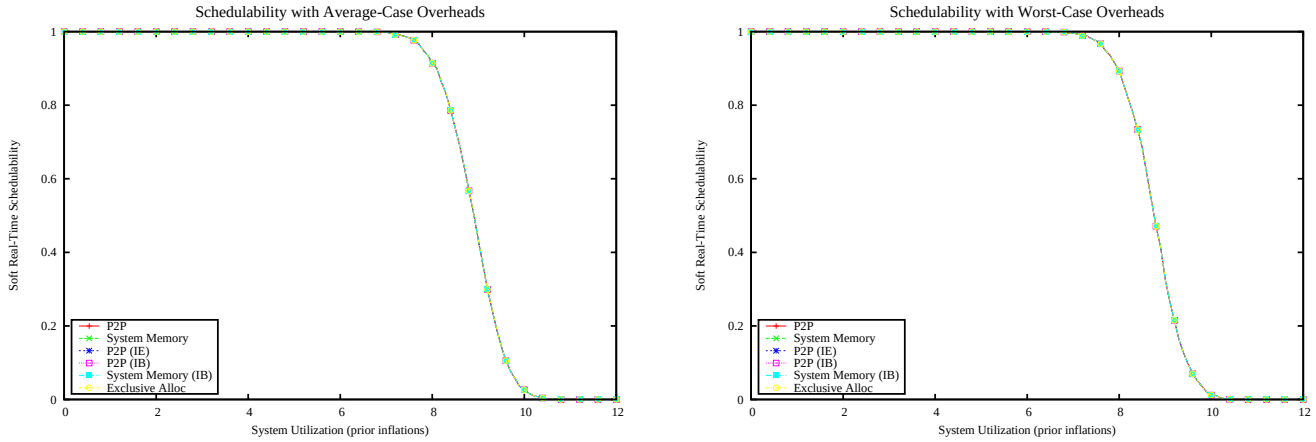

Figure 5565: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

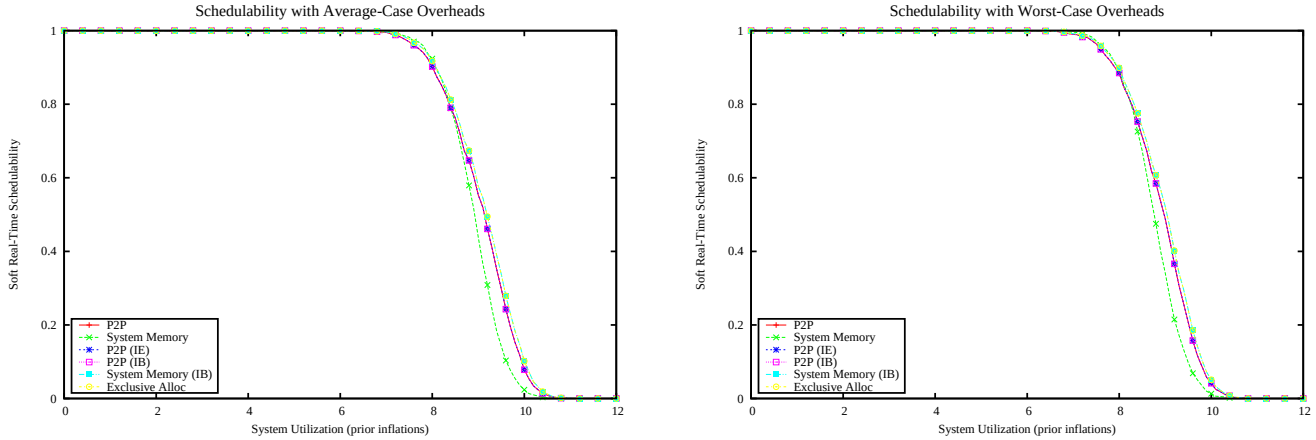

Figure 5566: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

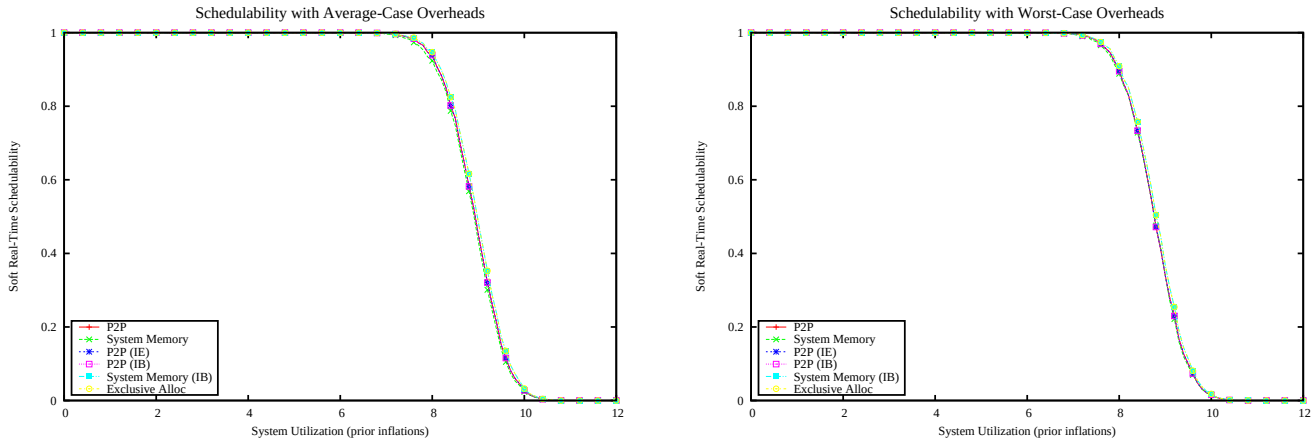

Figure 5567: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

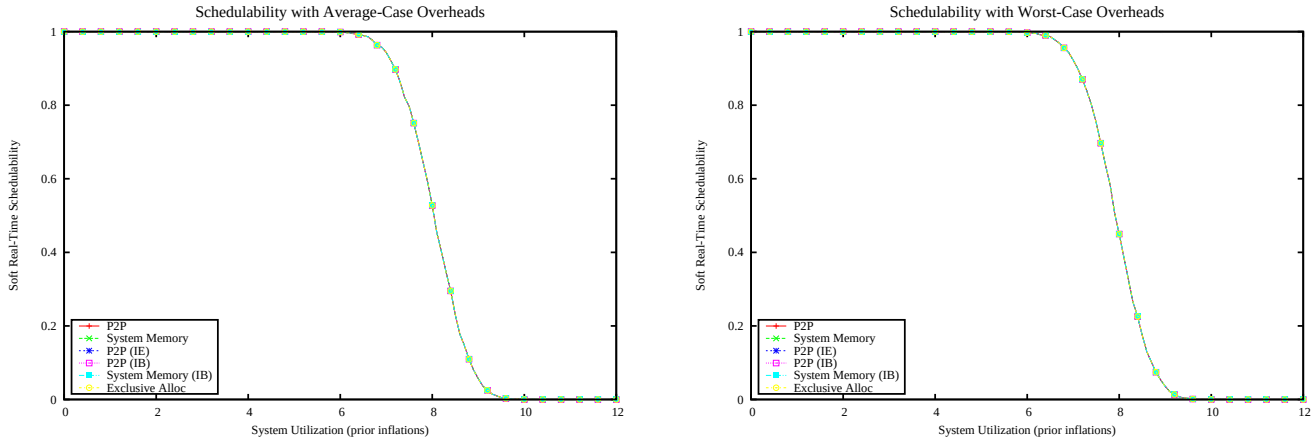

Figure 5568: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

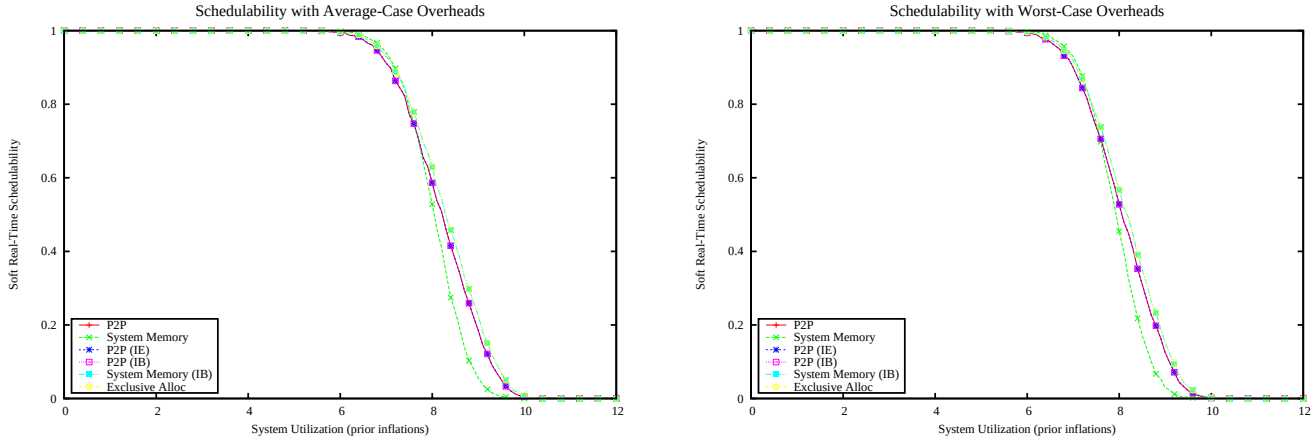

Figure 5569: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

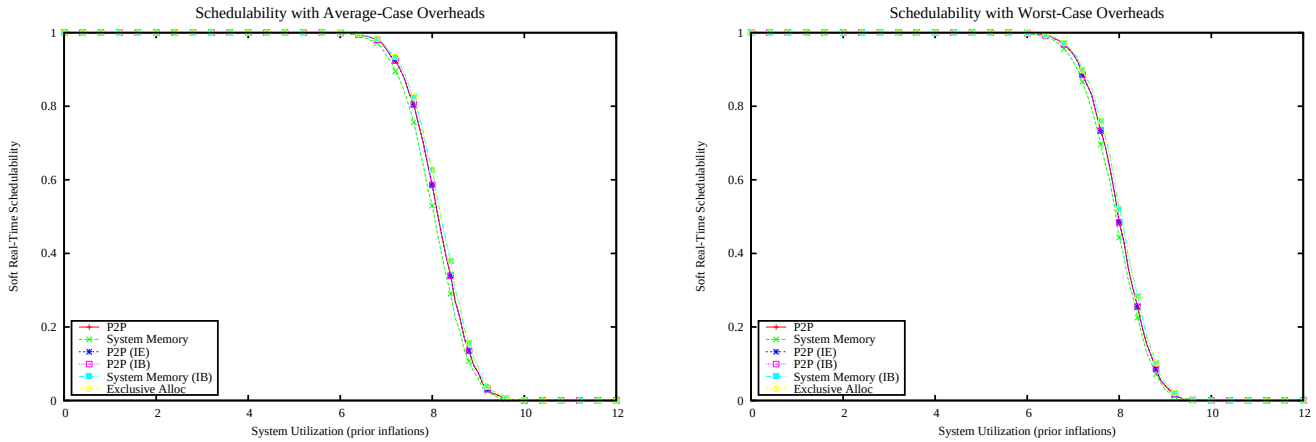

Figure 5570: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

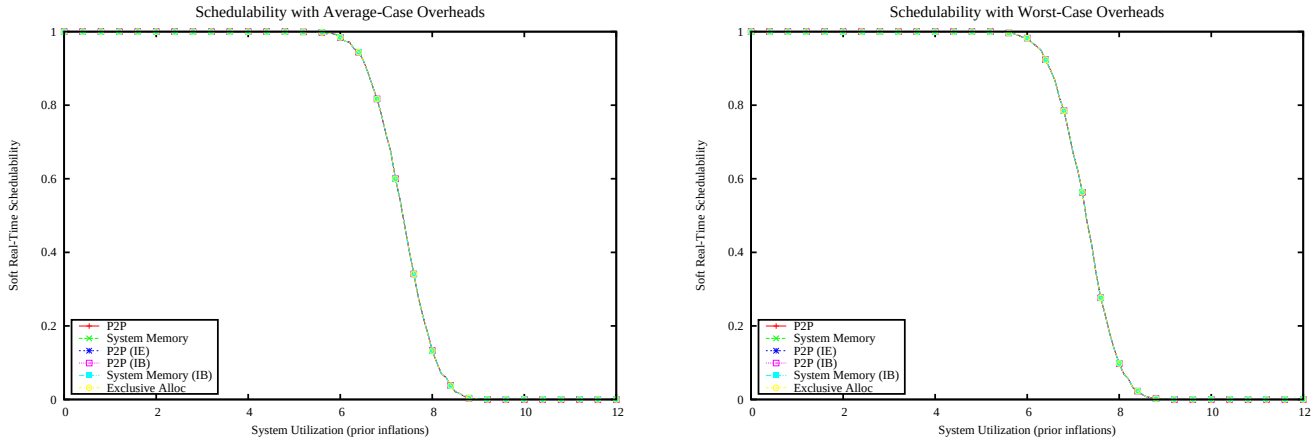

Figure 5571: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

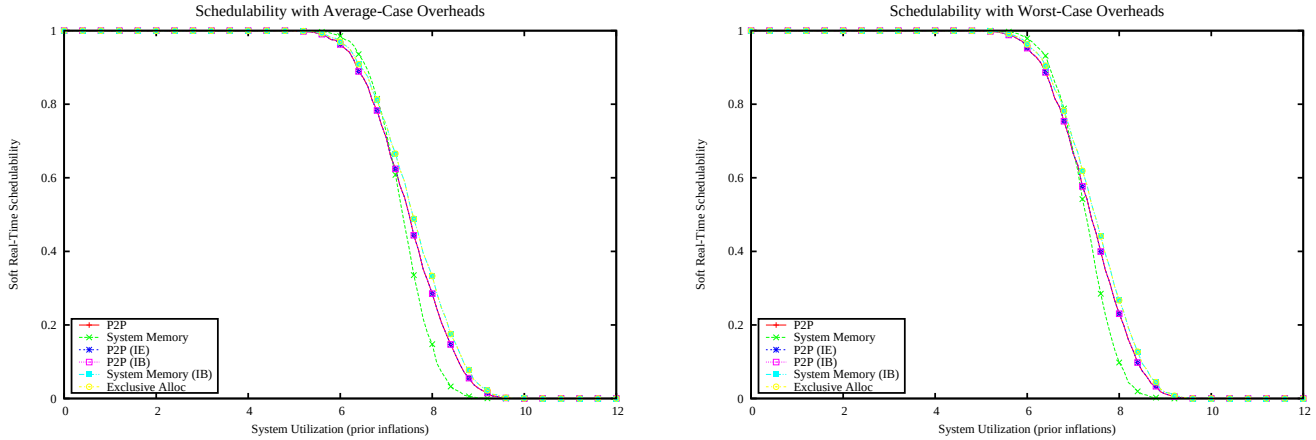

Figure 5572: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

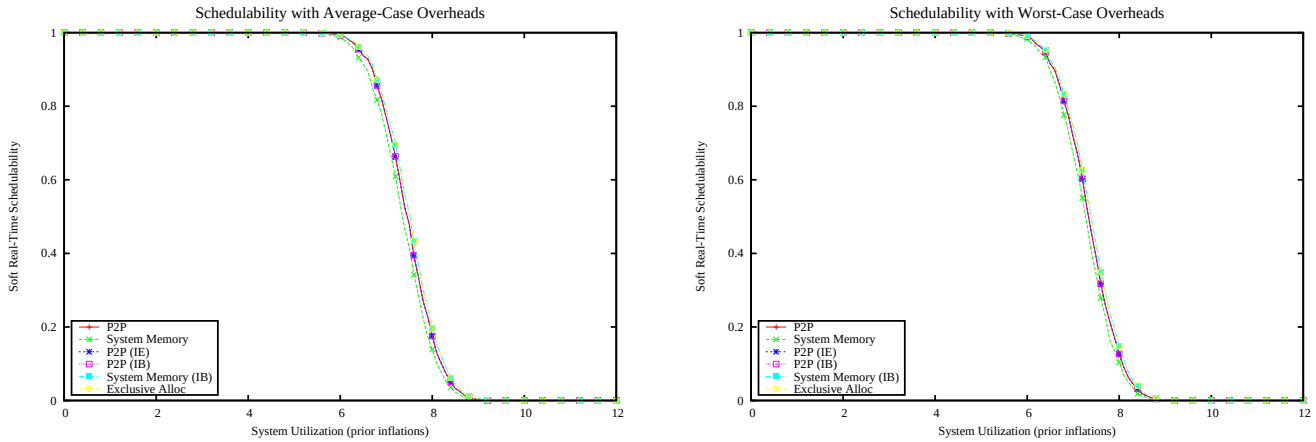

Figure 5573: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

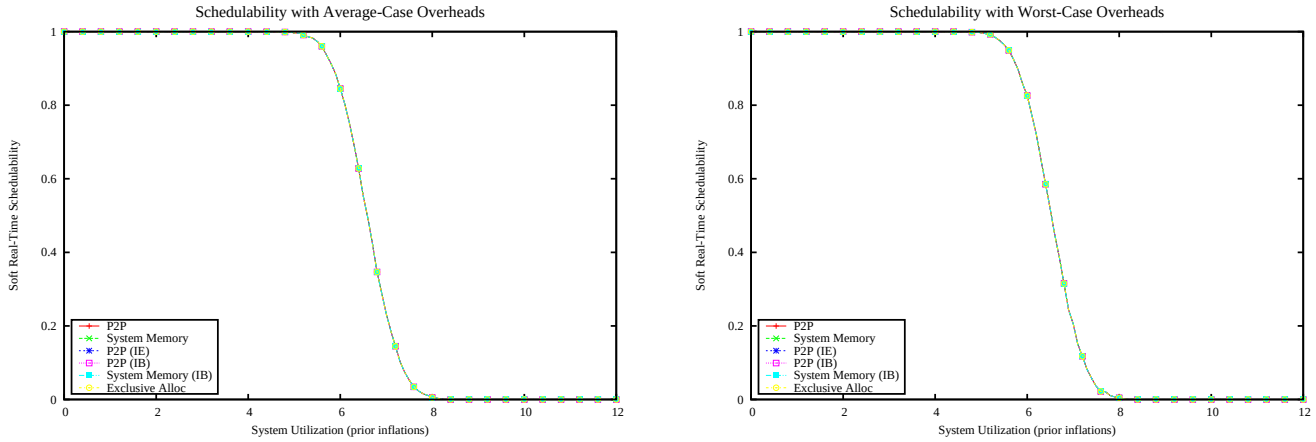

Figure 5574: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

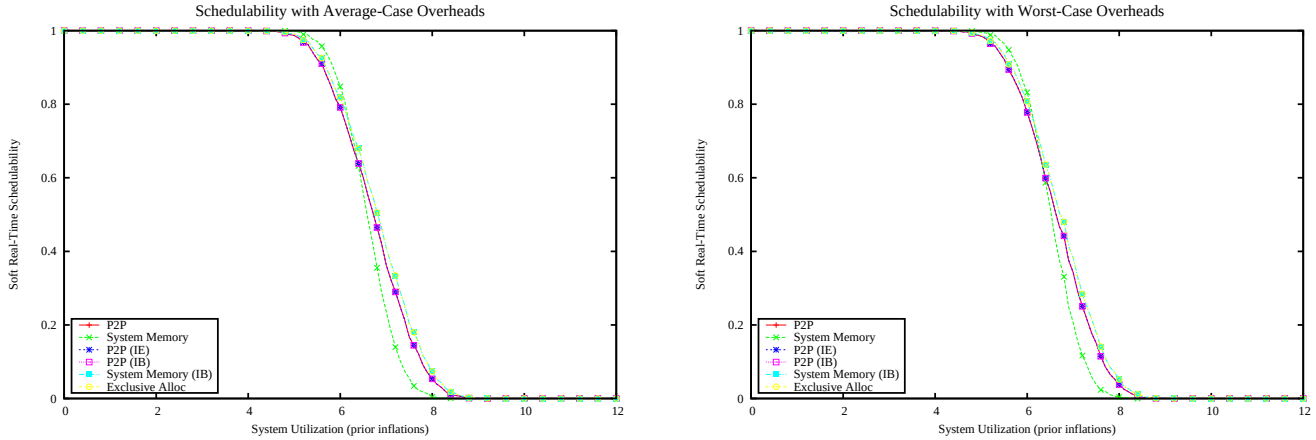

Figure 5575: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

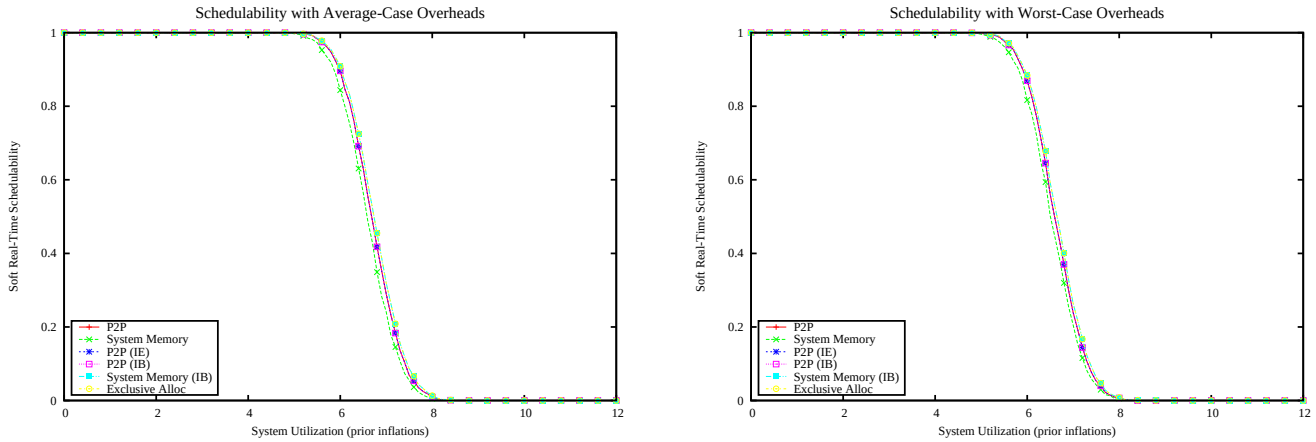

Figure 5576: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

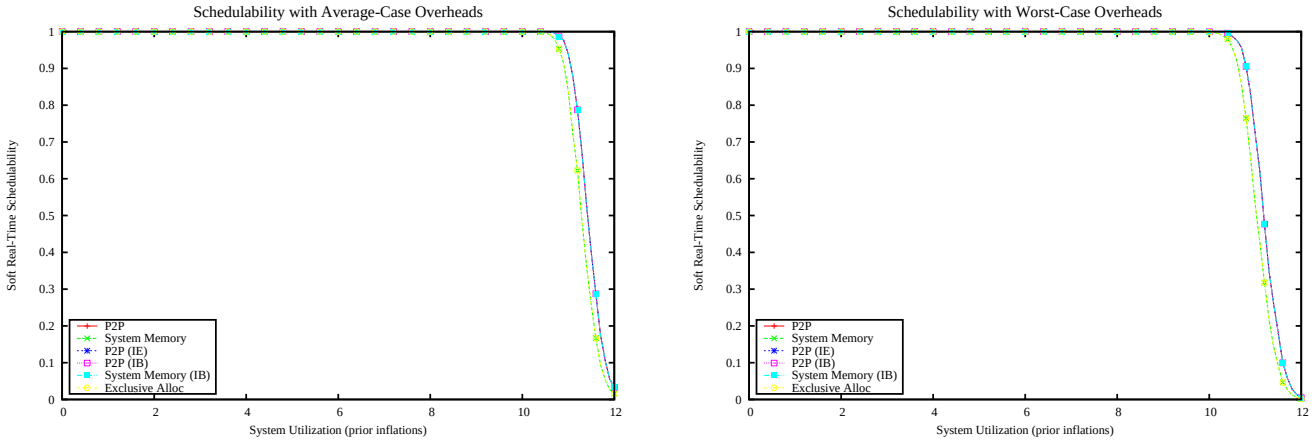

Figure 5577: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

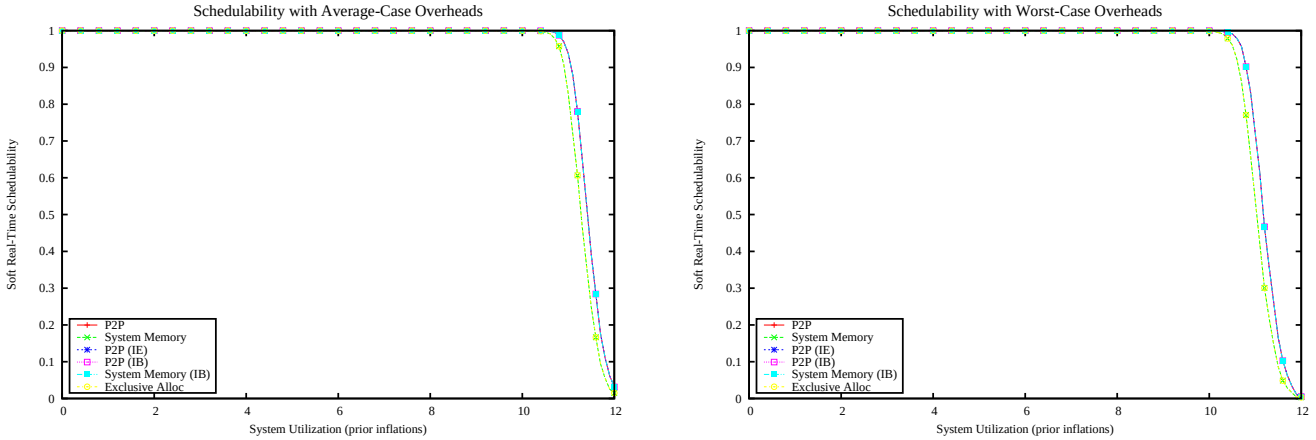

Figure 5578: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

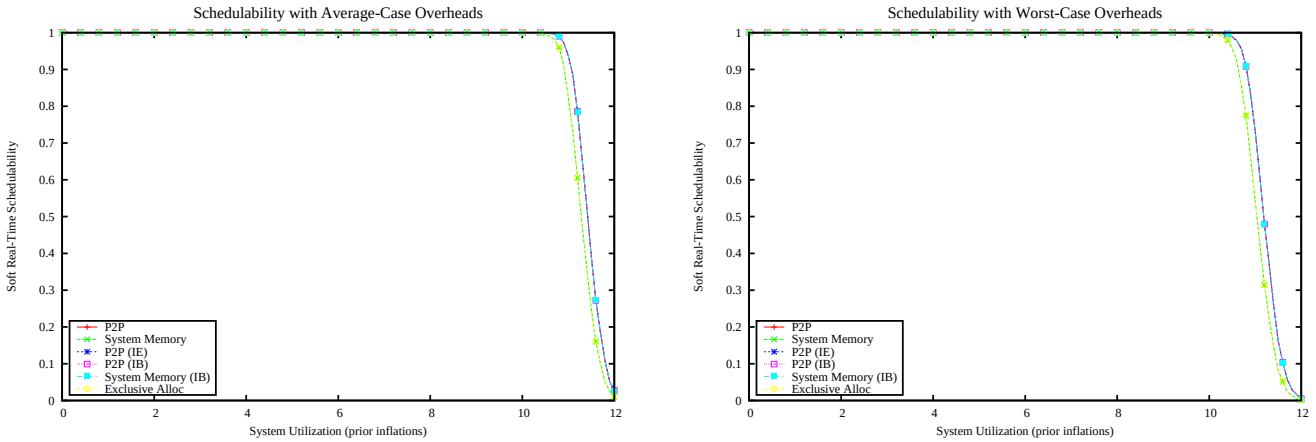

Figure 5579: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

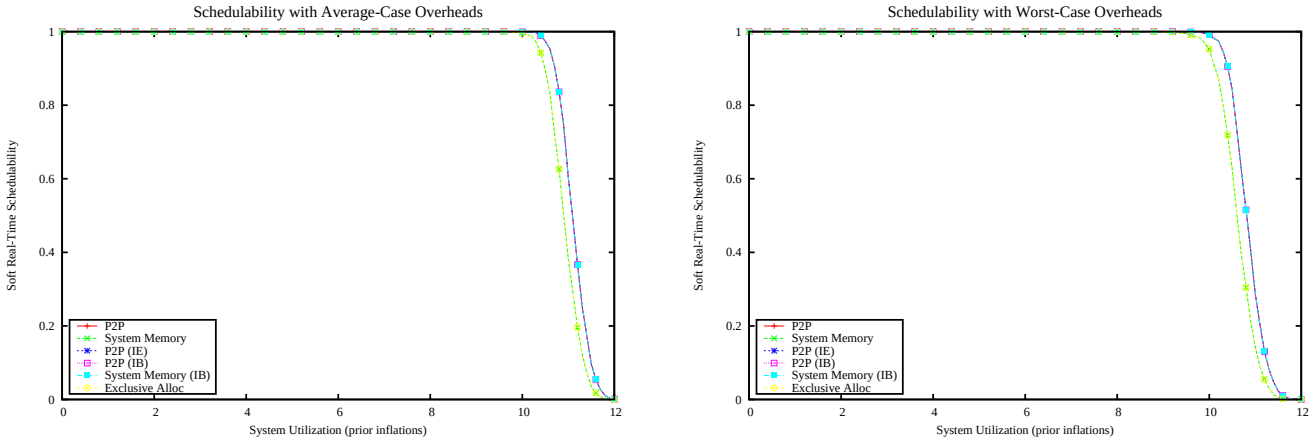

Figure 5580: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

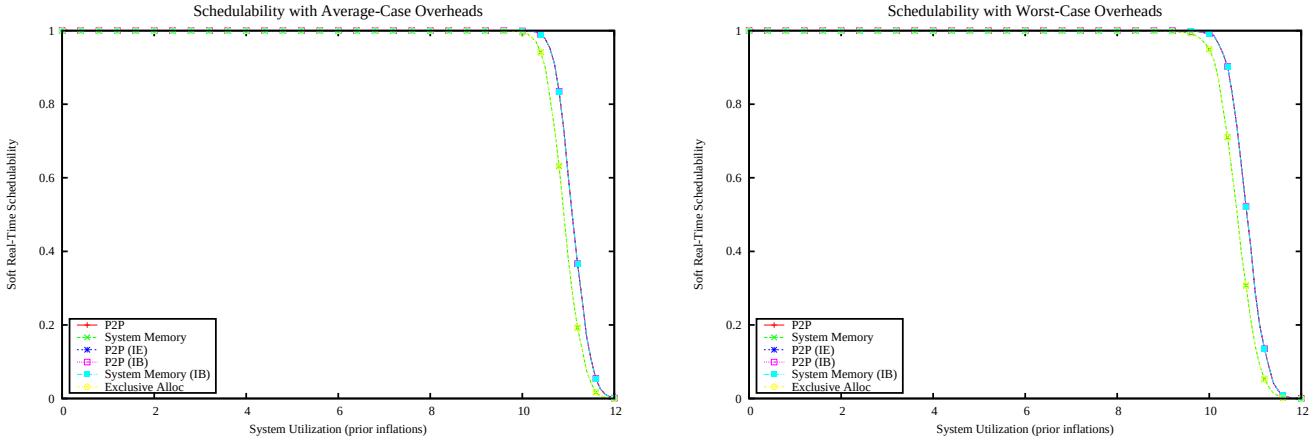

Figure 5581: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

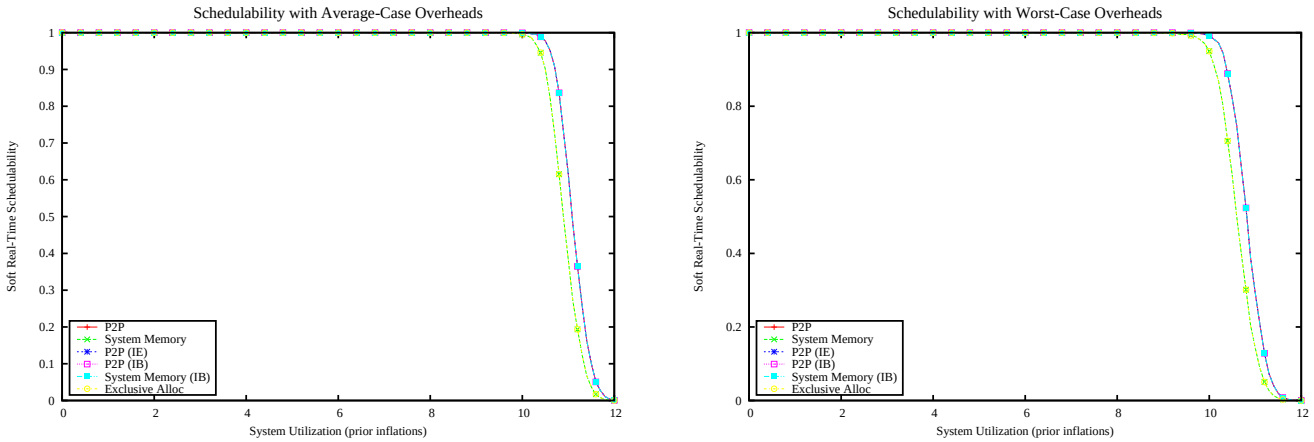

Figure 5582: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

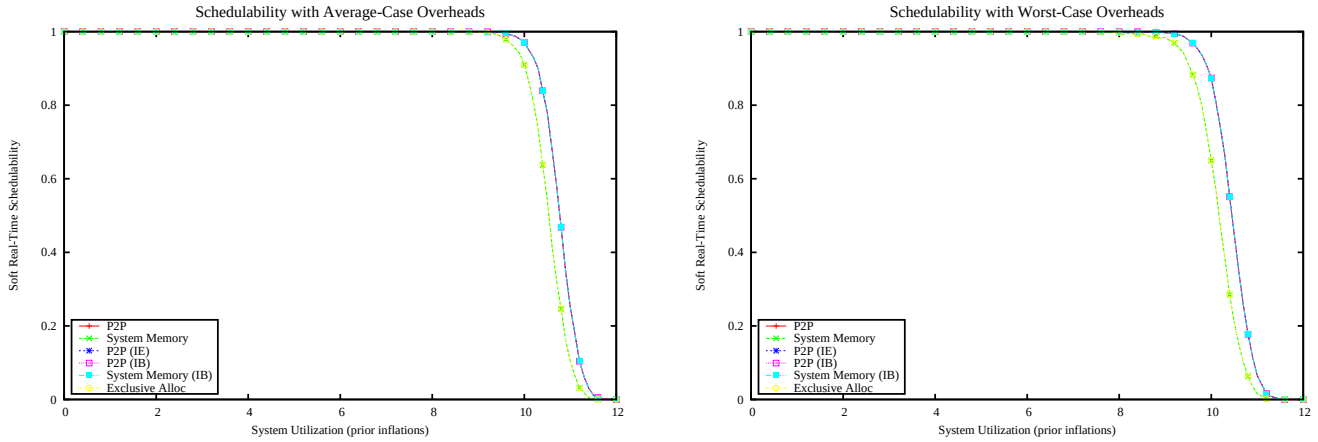

Figure 5583: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

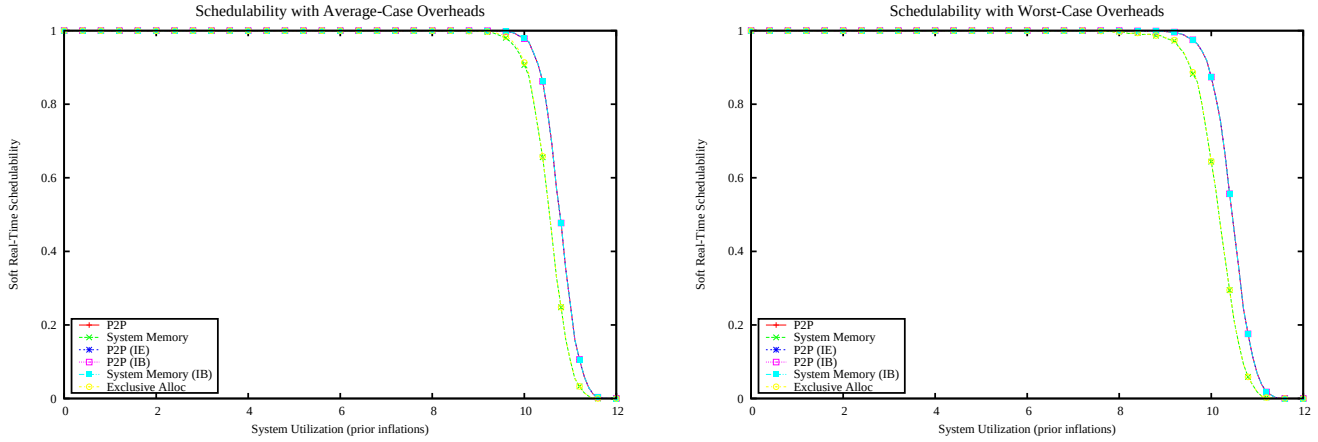

Figure 5584: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

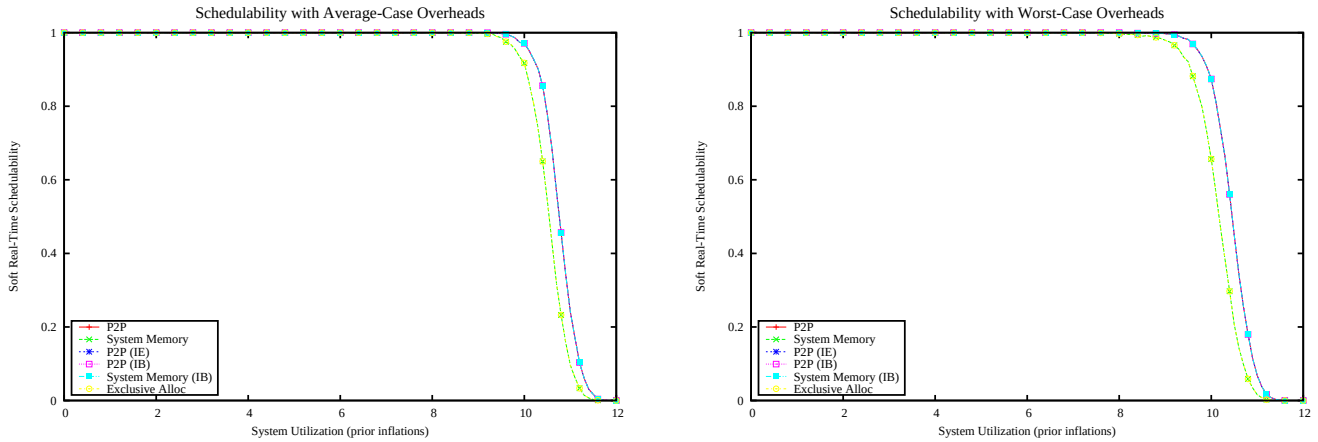

Figure 5585: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

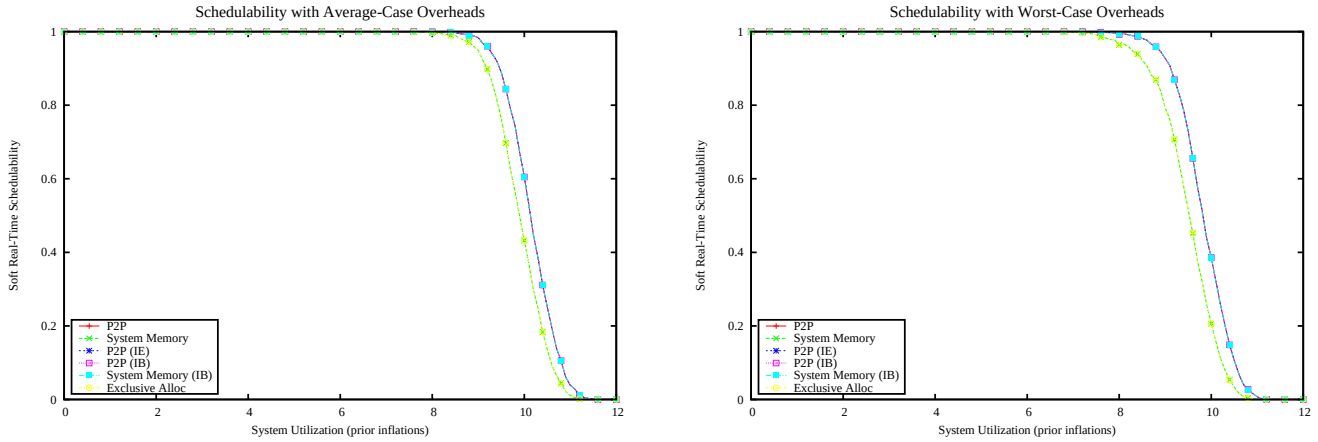

Figure 5586: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

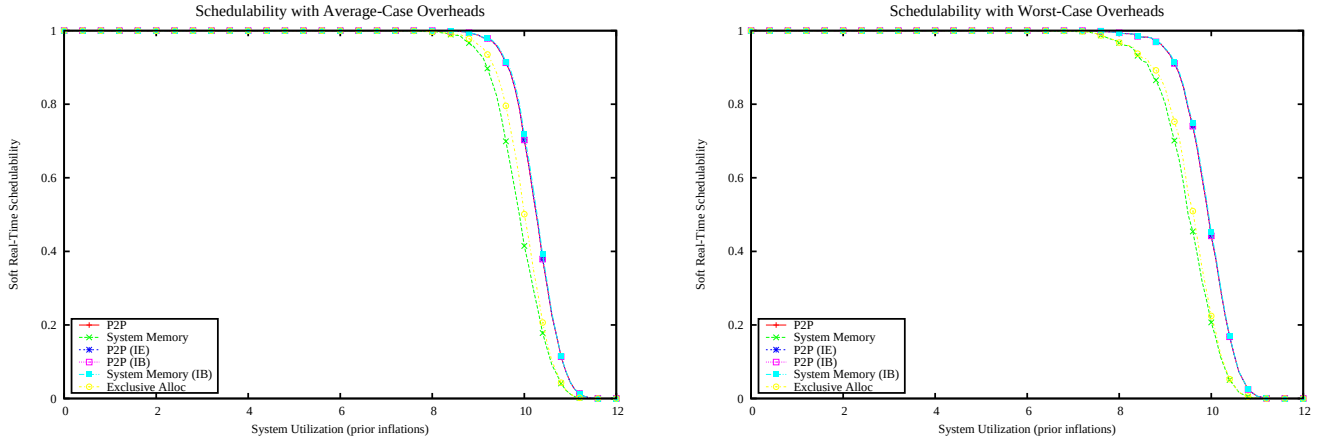

Figure 5587: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

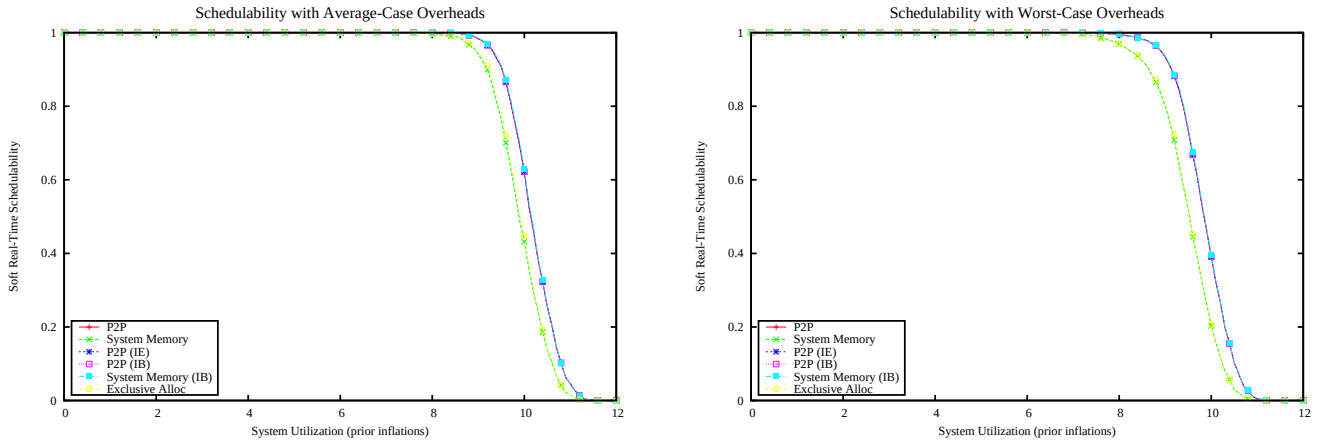

Figure 5588: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

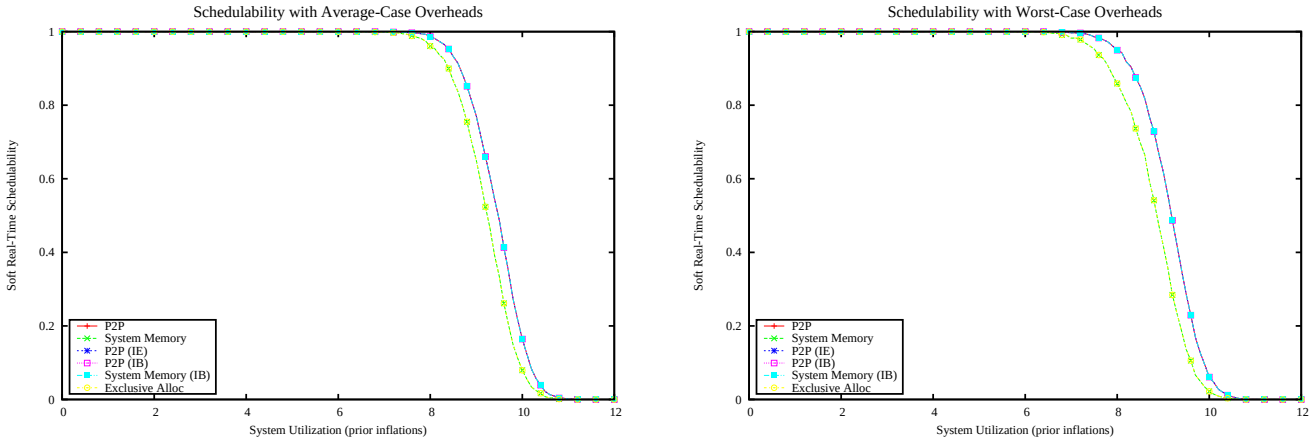

Figure 5589: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

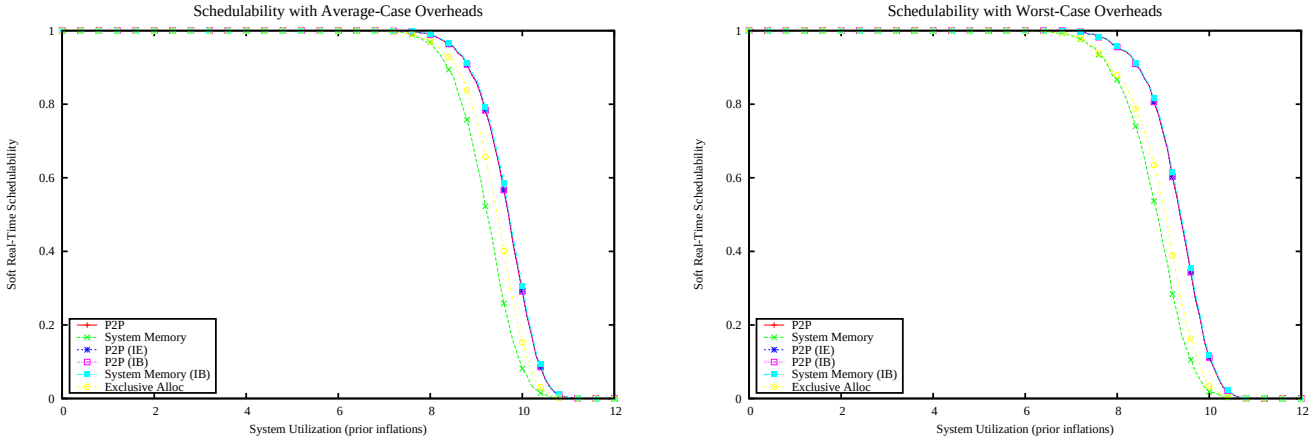

Figure 5590: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

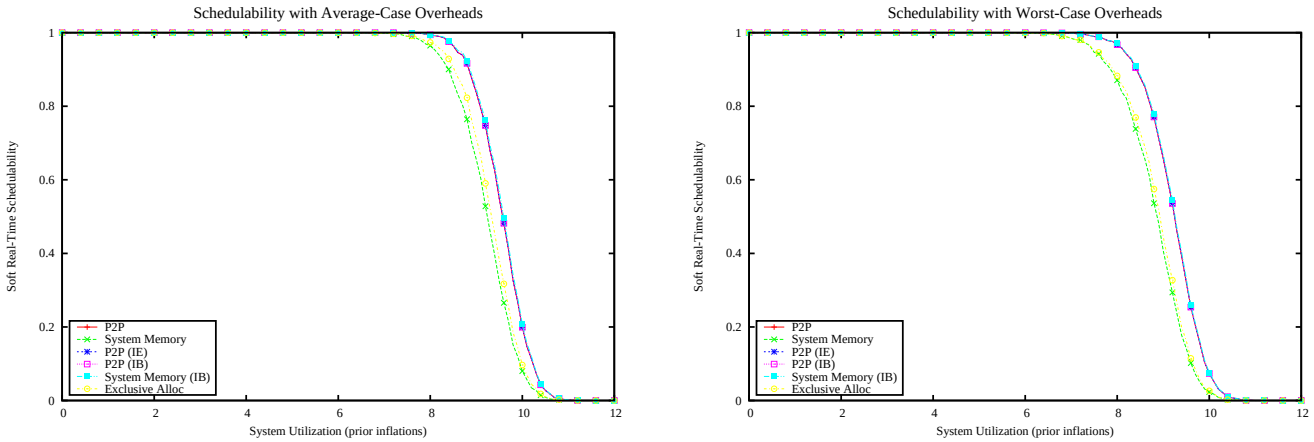

Figure 5591: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

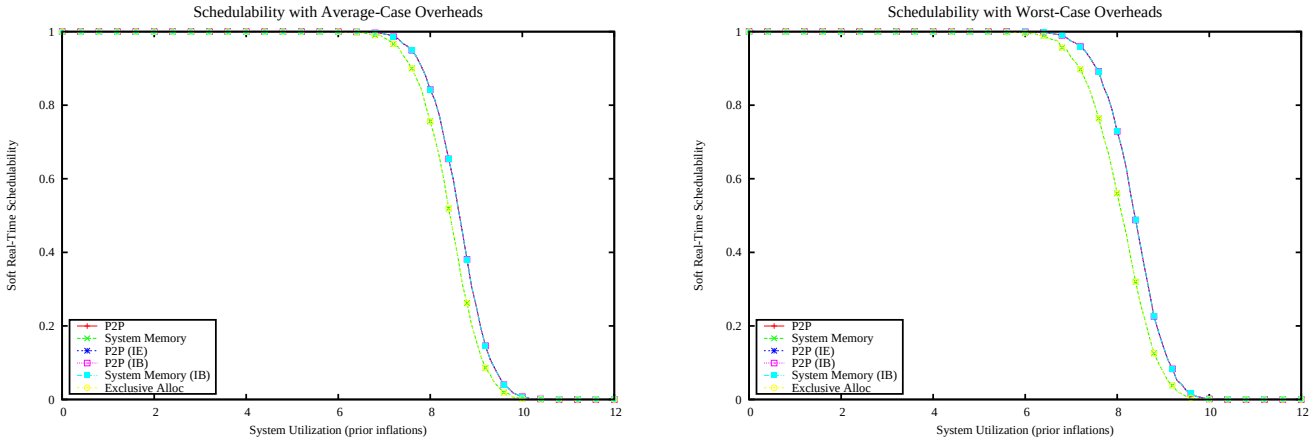

Figure 5592: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

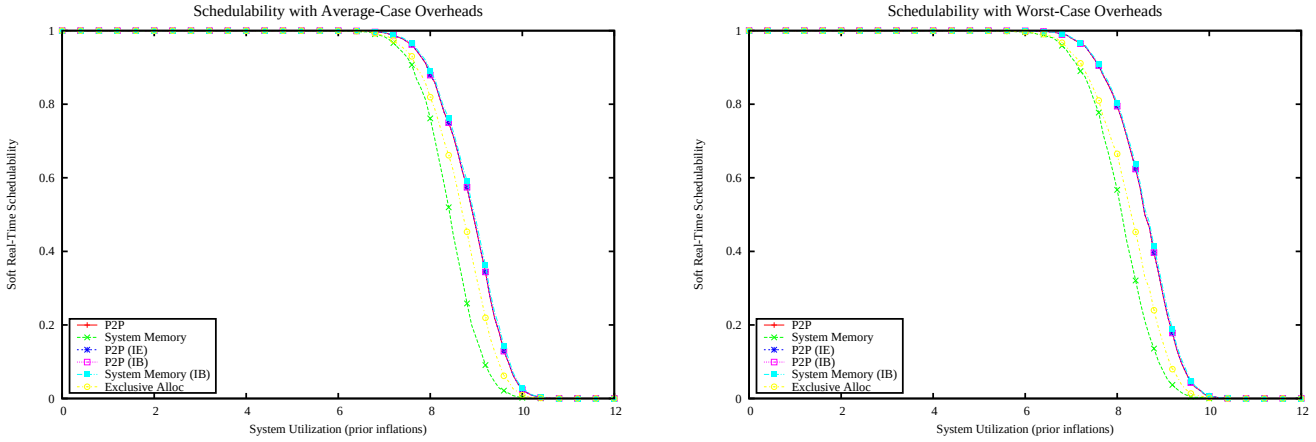

Figure 5593: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

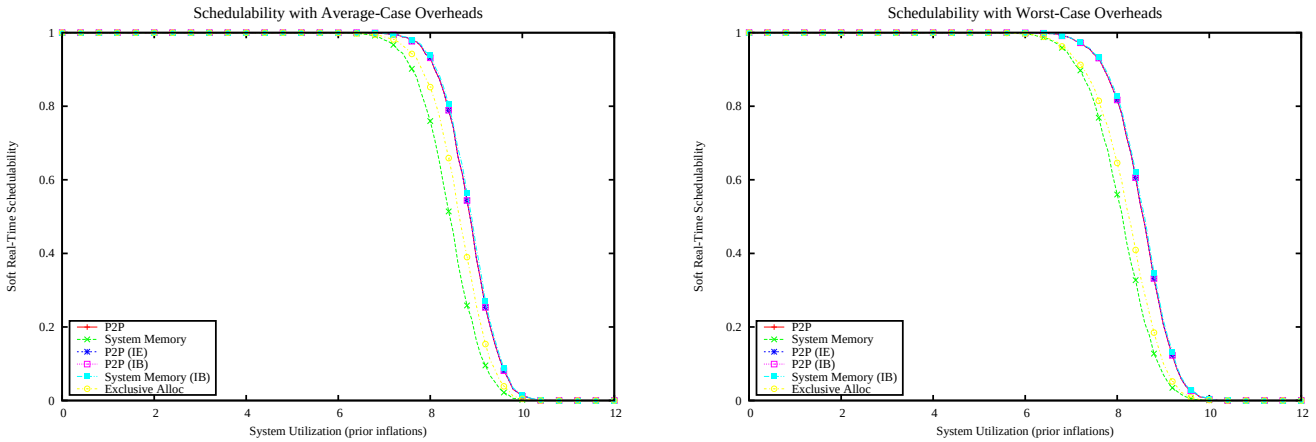

Figure 5594: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

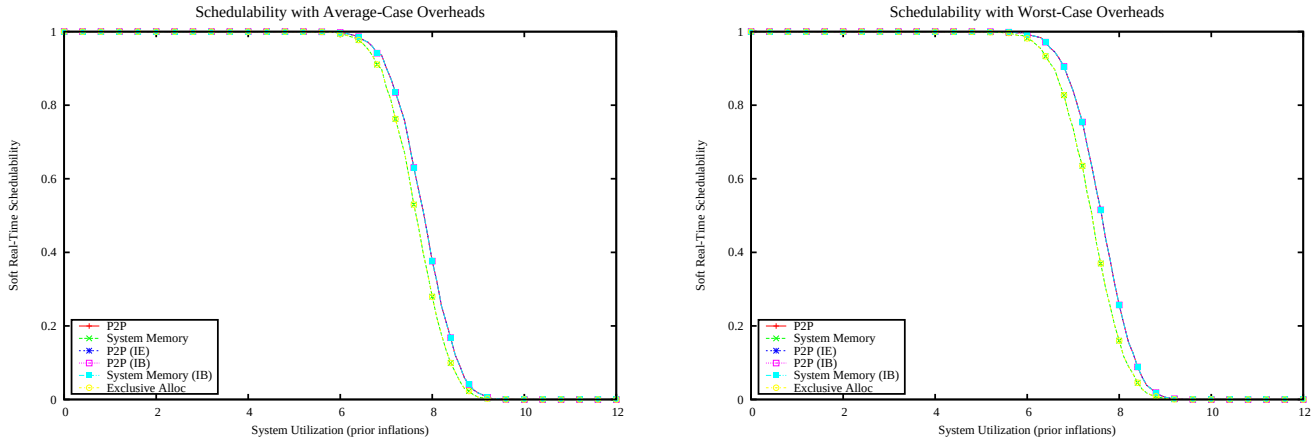

Figure 5595: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

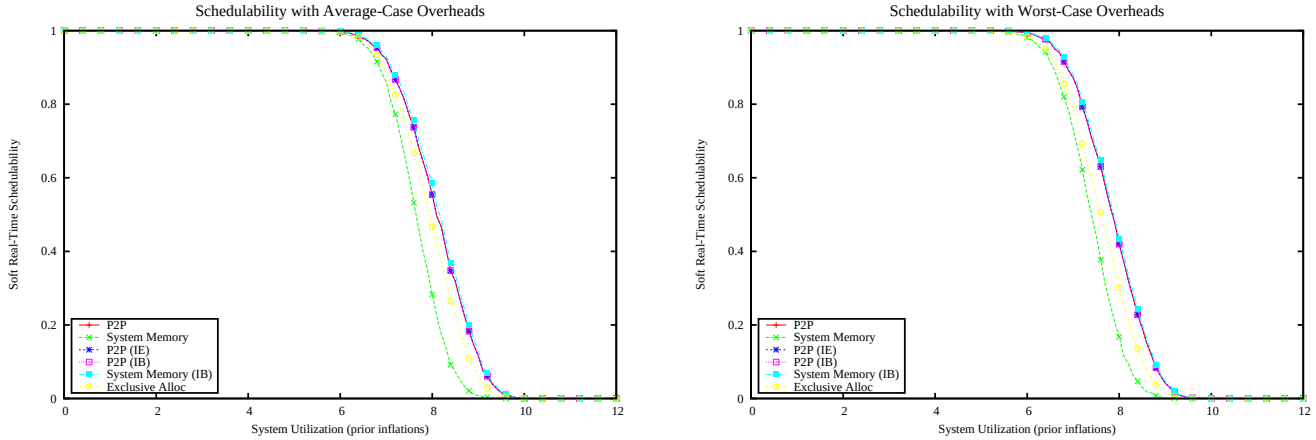

Figure 5596: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

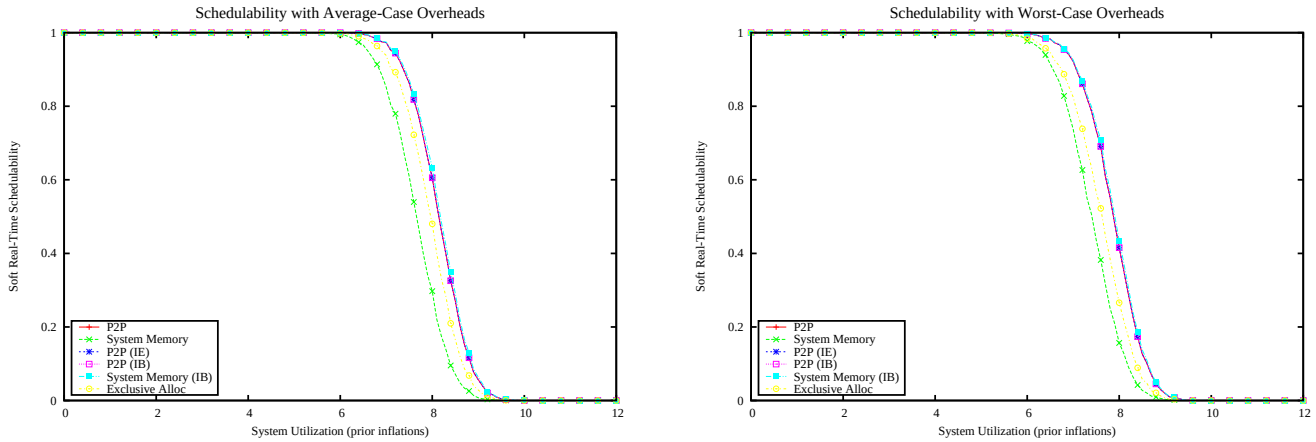

Figure 5597: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

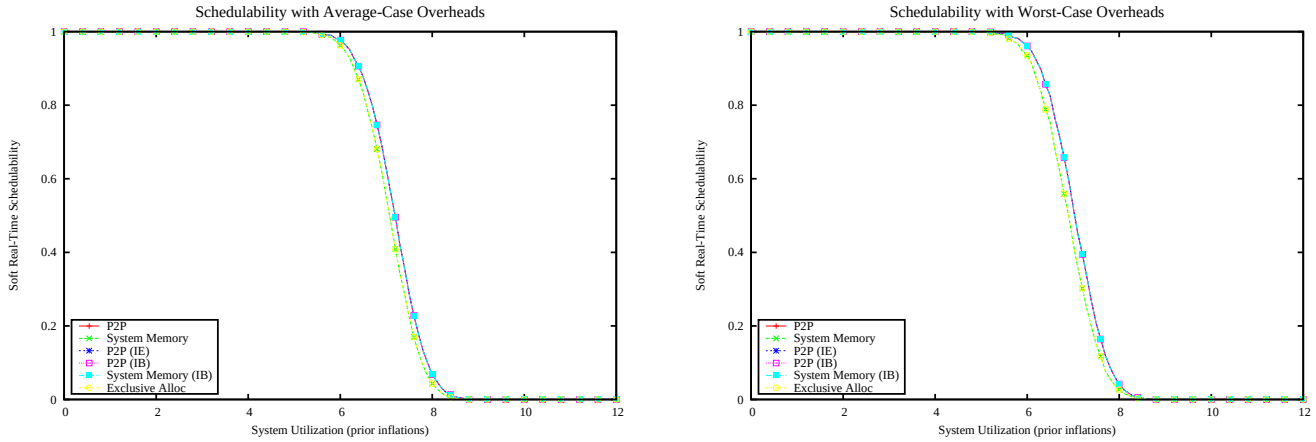

Figure 5598: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

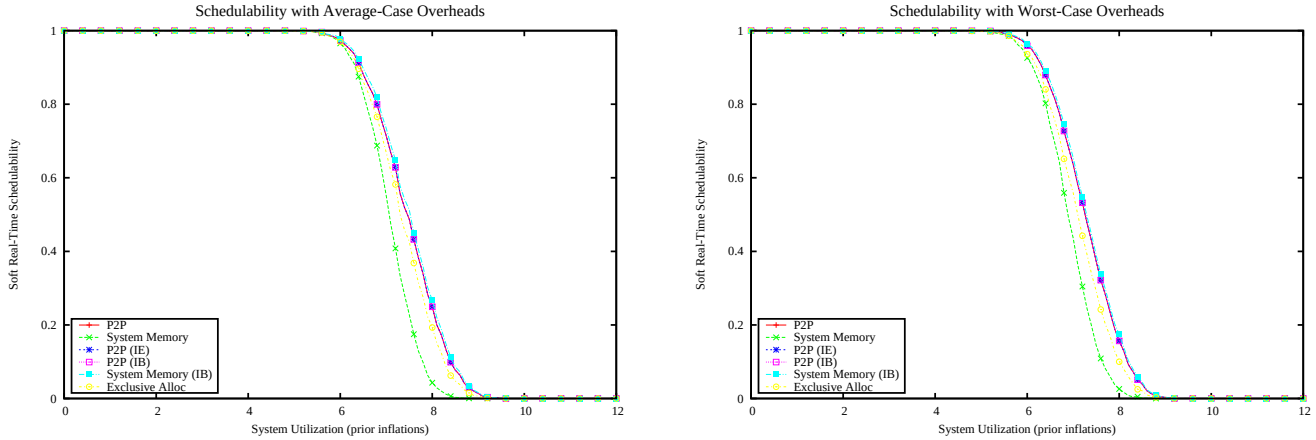

Figure 5599: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

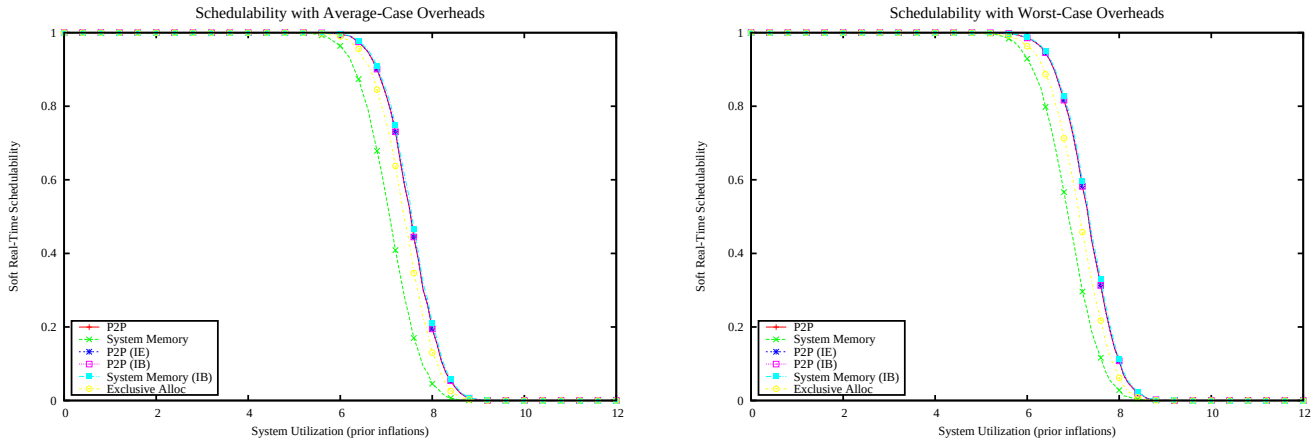

Figure 5600: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

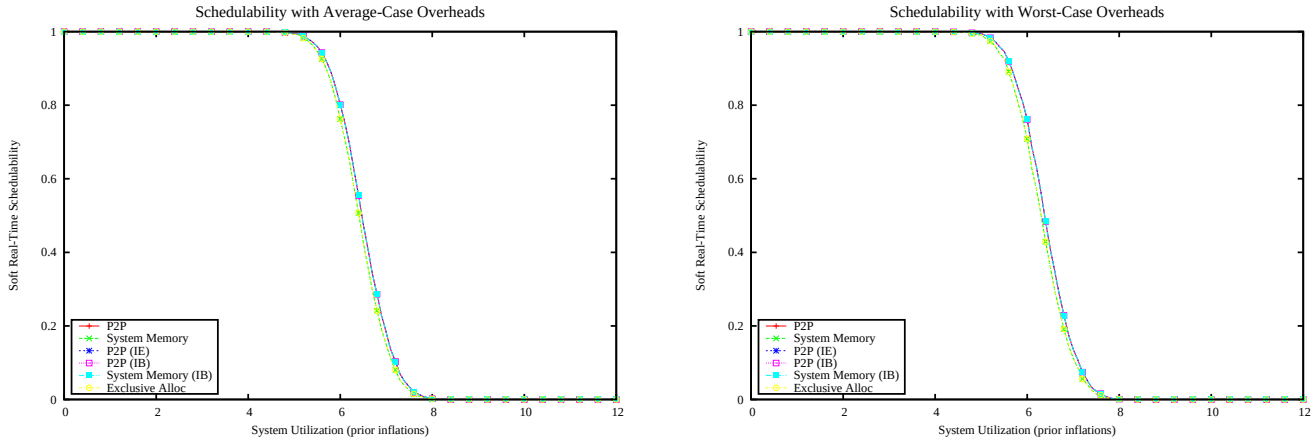

Figure 5601: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

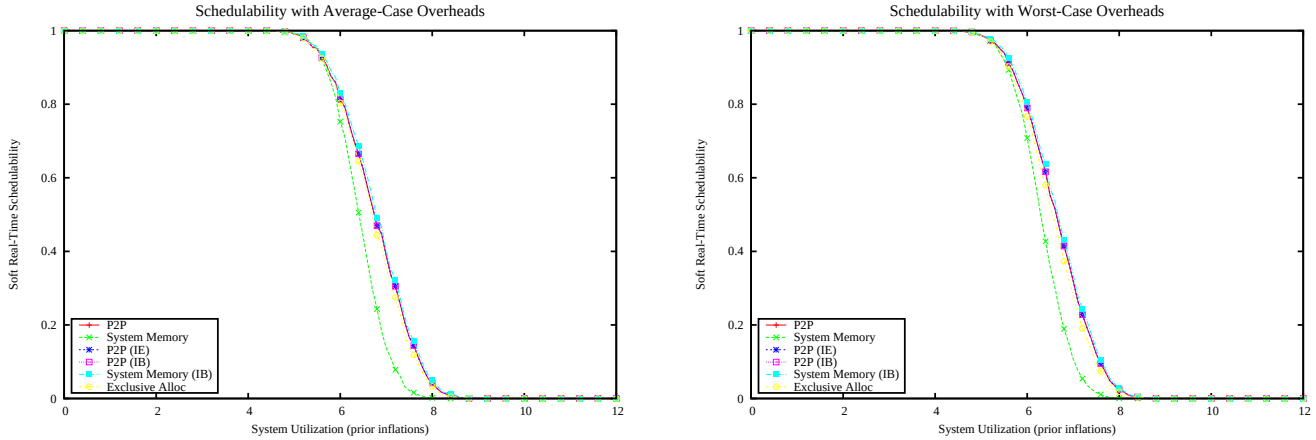

Figure 5602: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

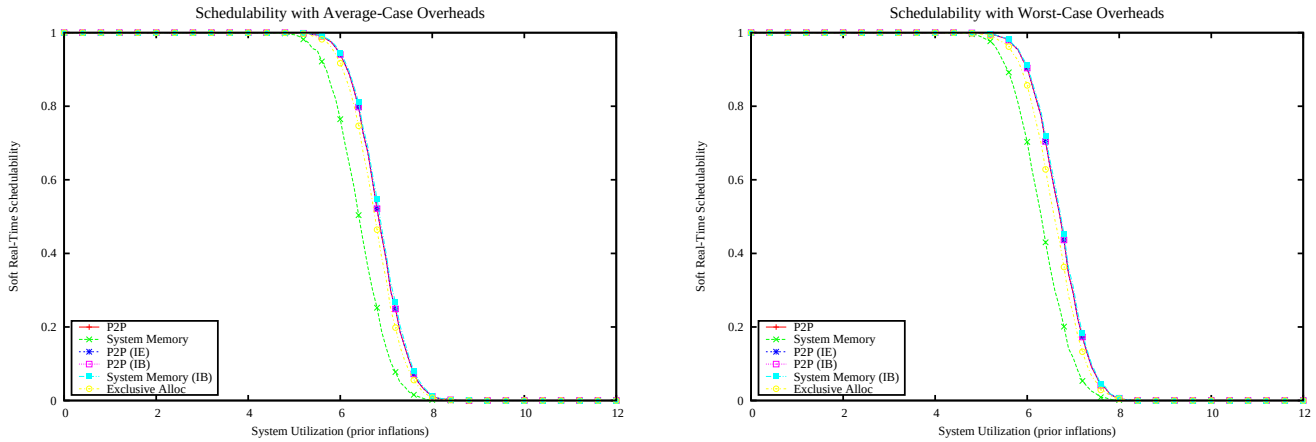

Figure 5603: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

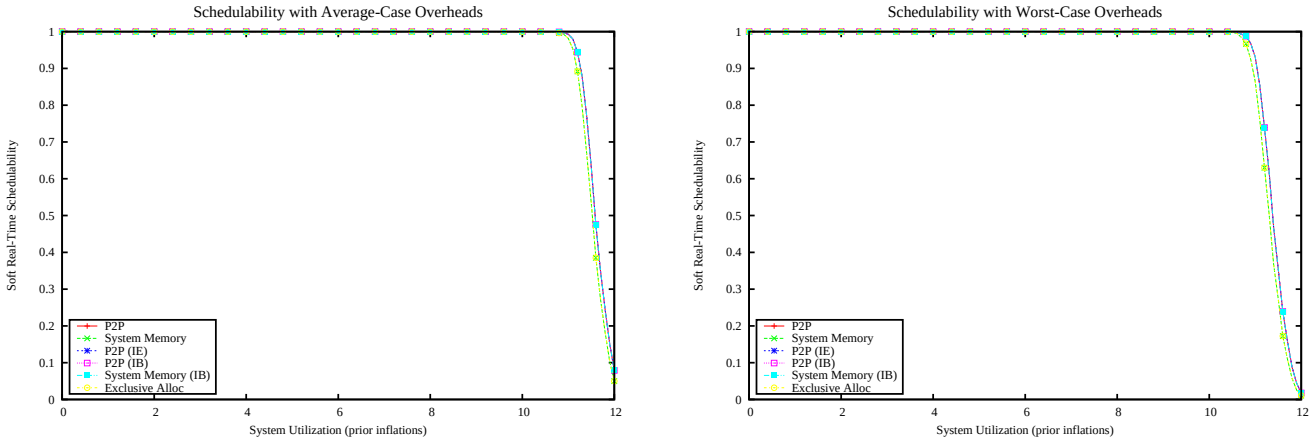

Figure 5604: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

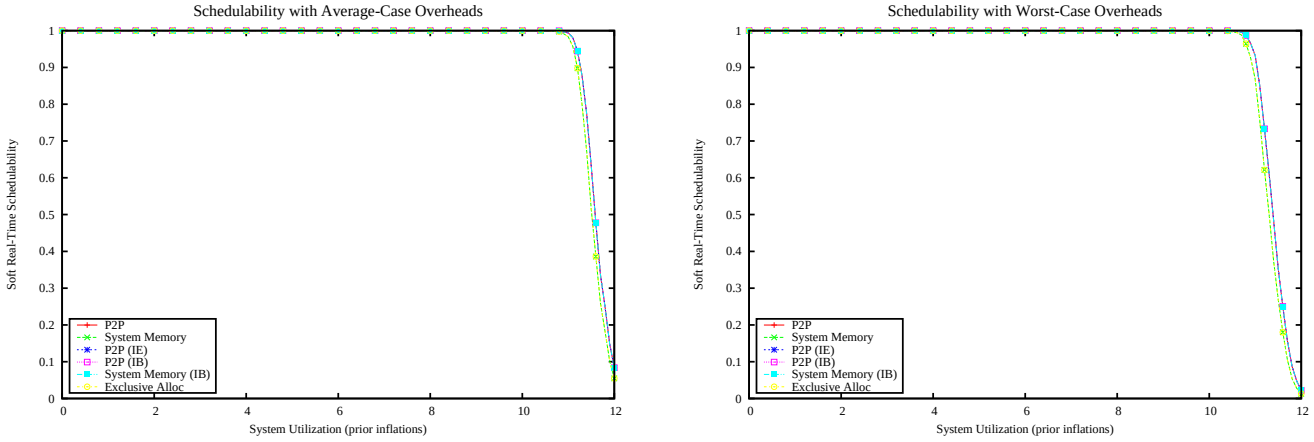

Figure 5605: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

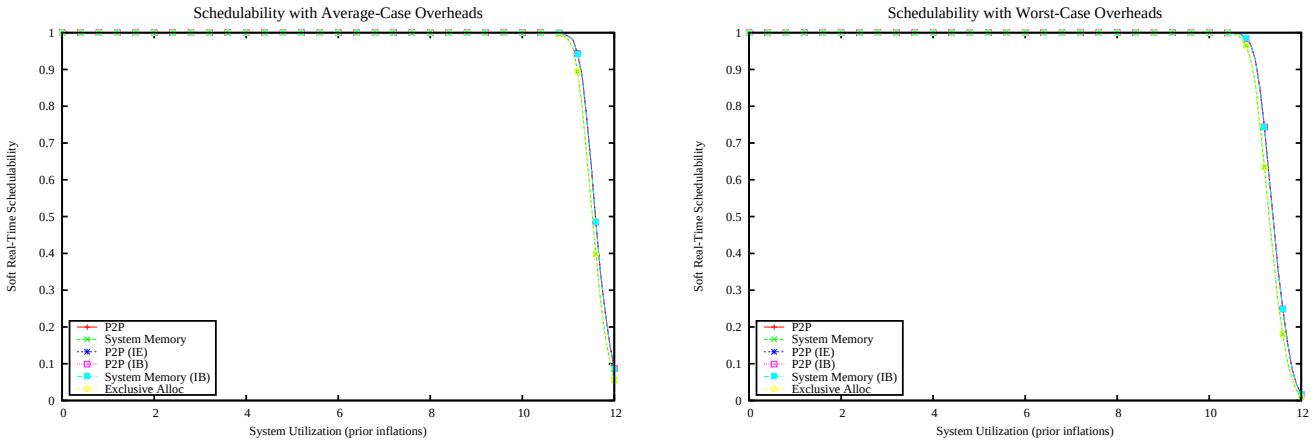

Figure 5606: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

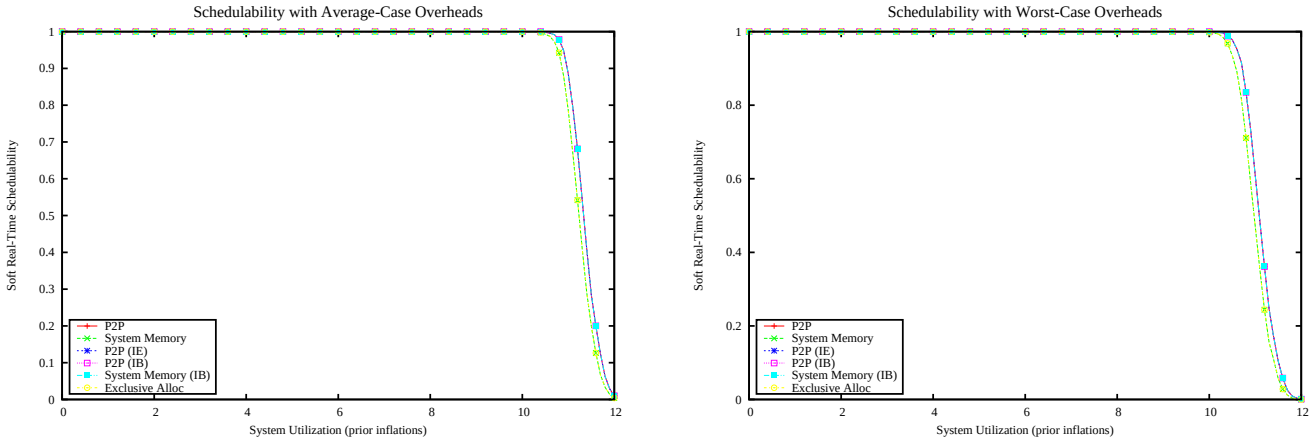

Figure 5607: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

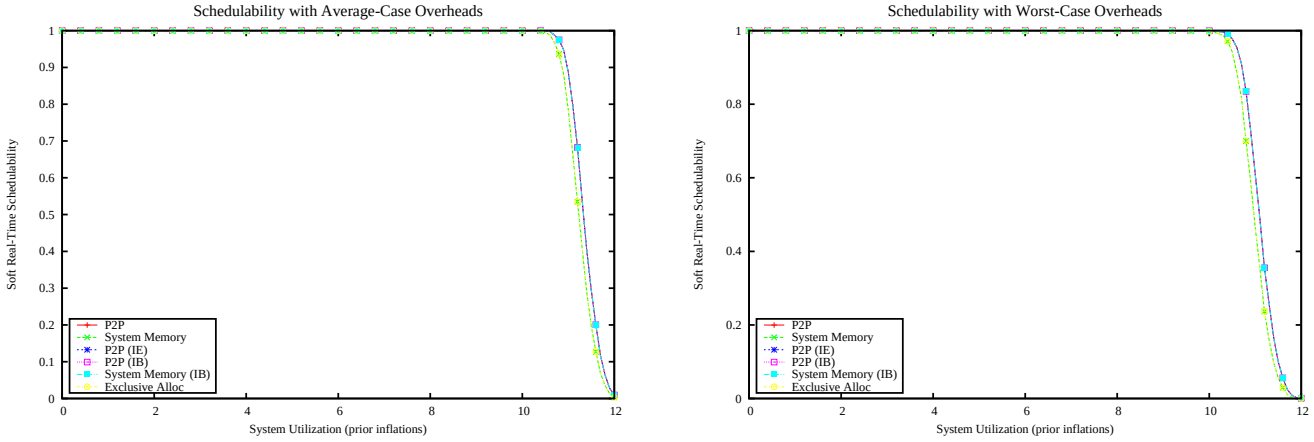

Figure 5608: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

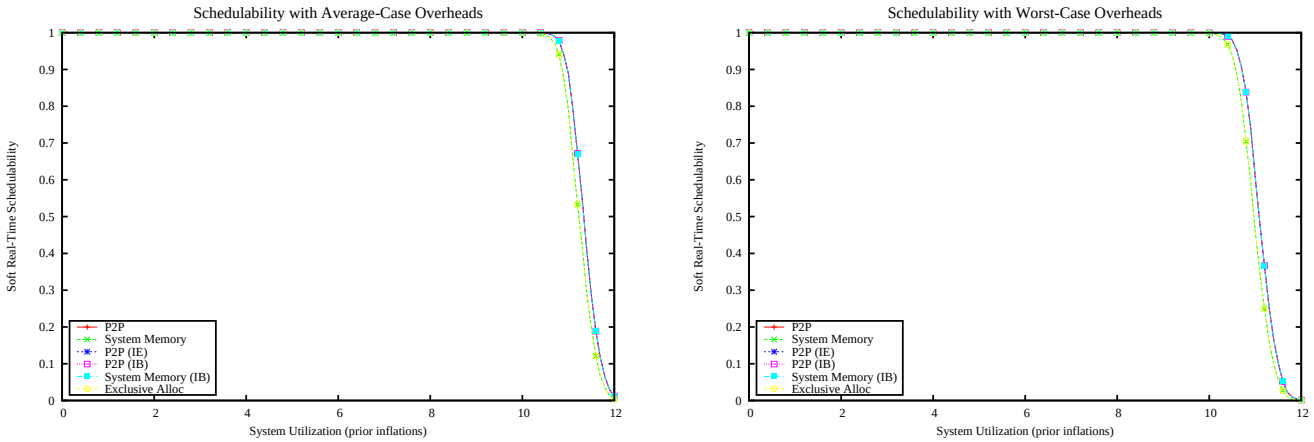

Figure 5609: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

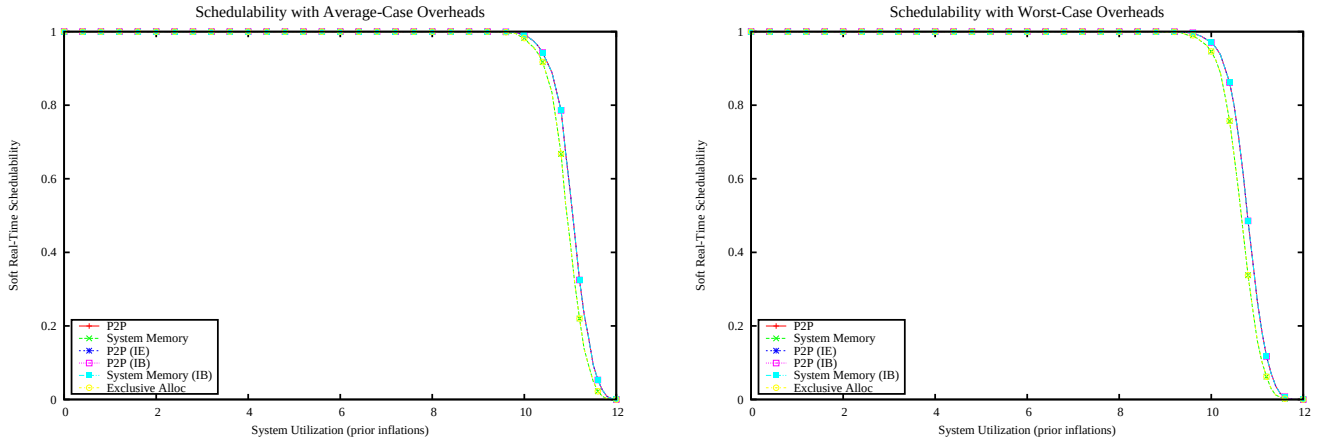

Figure 5610: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

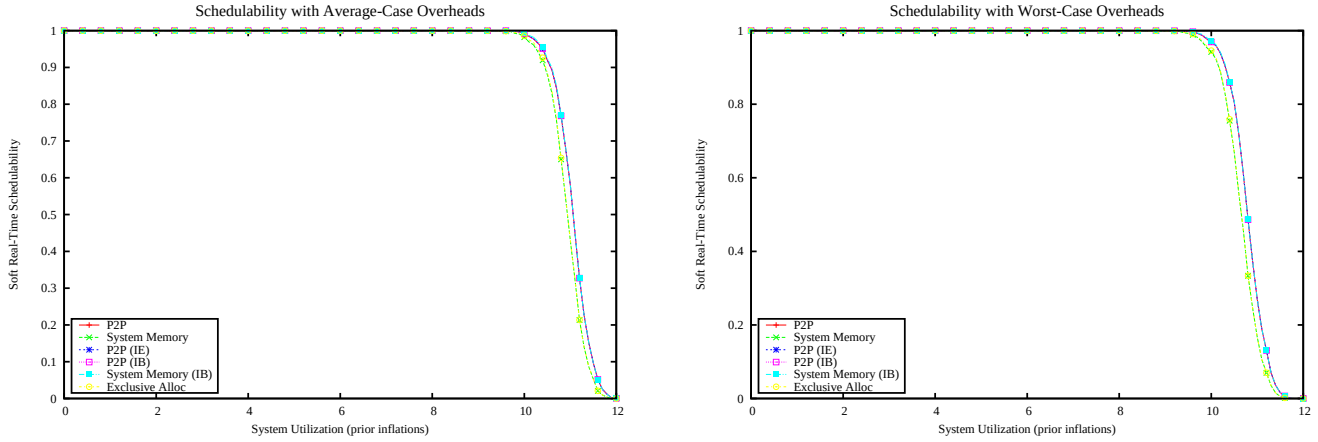

Figure 5611: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

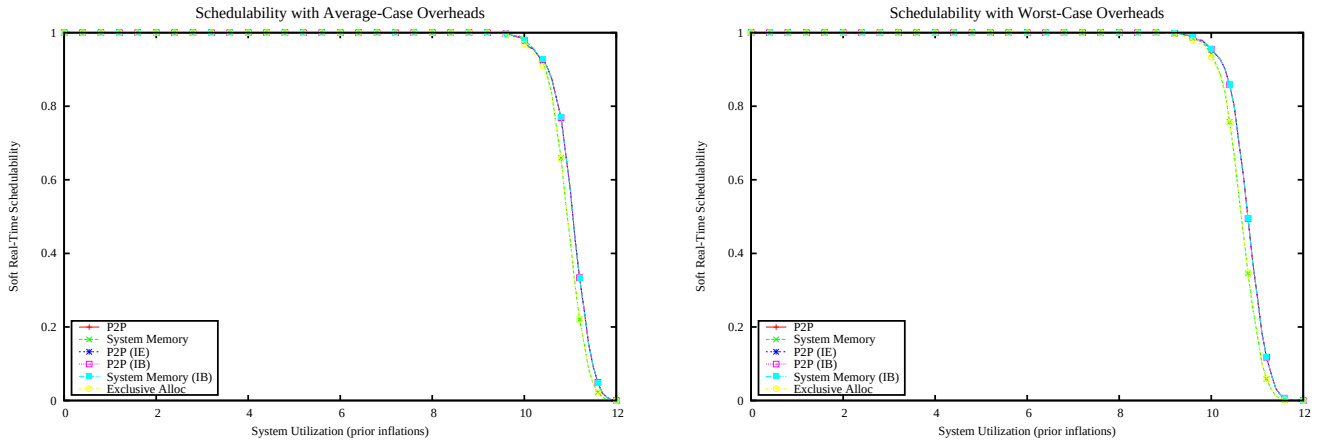

Figure 5612: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

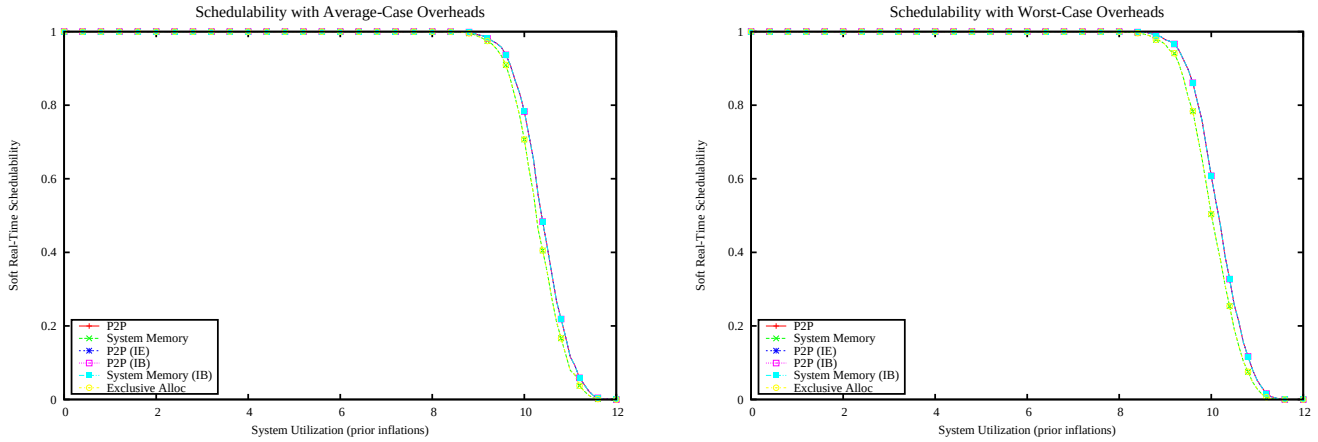

Figure 5613: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

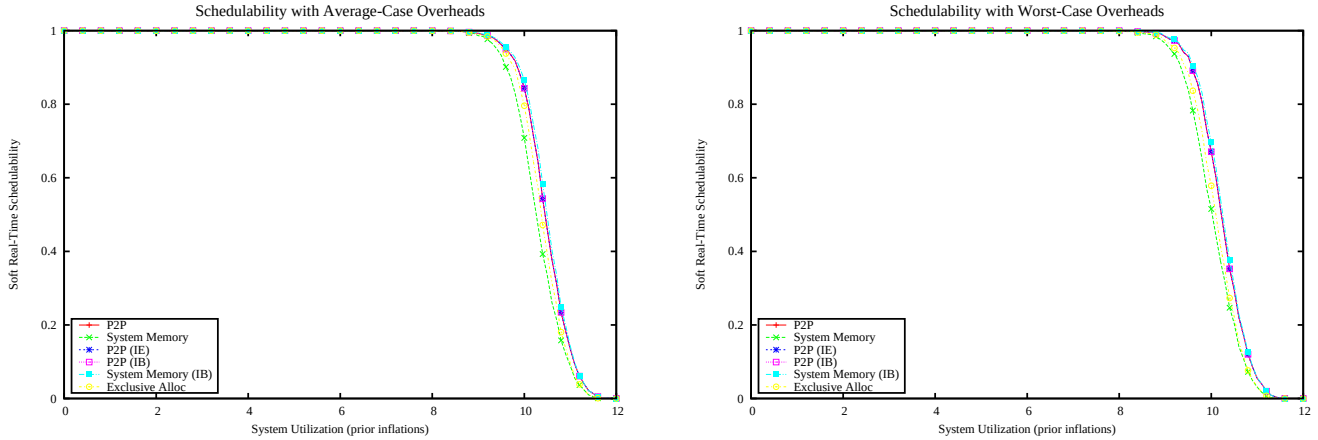

Figure 5614: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

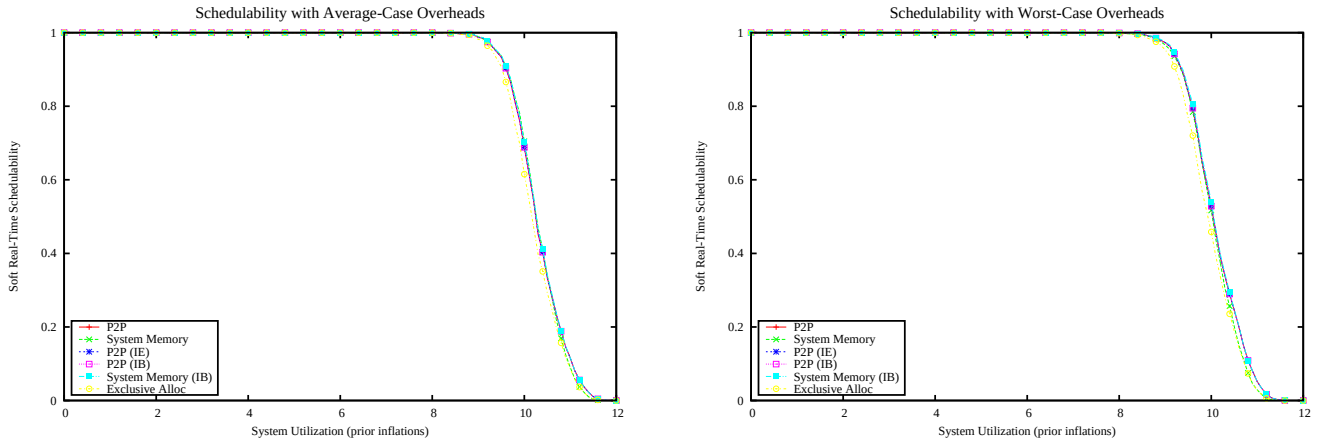

Figure 5615: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

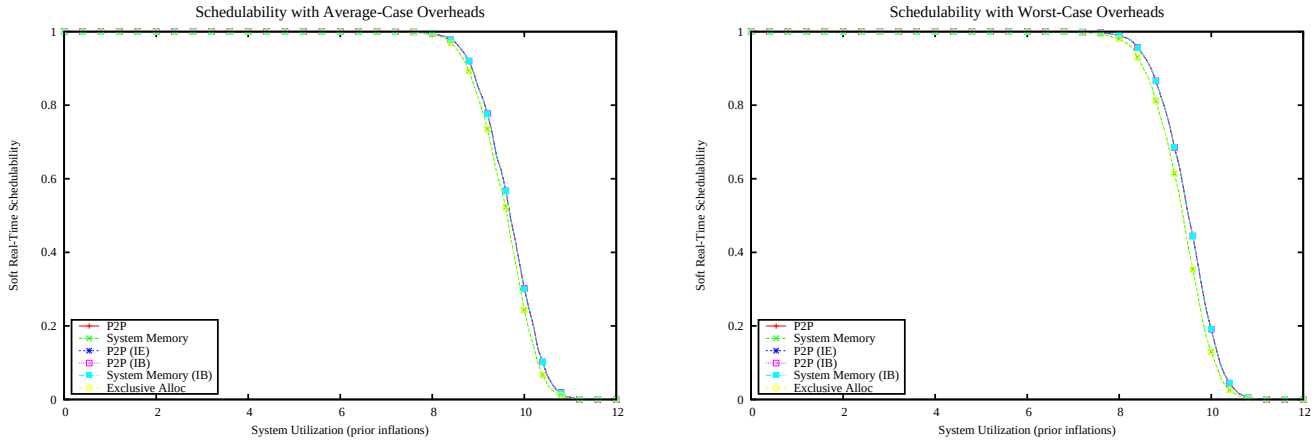

Figure 5616: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

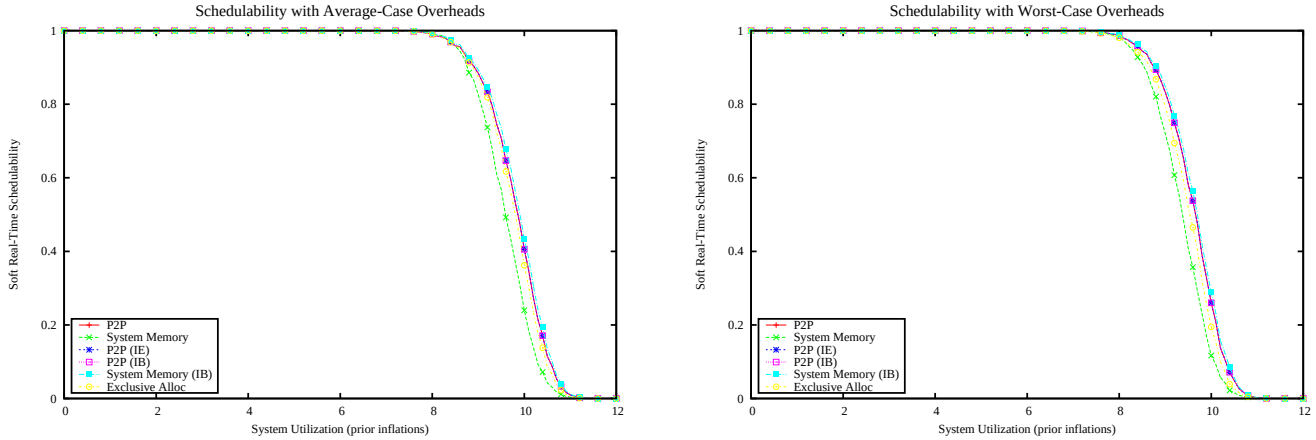

Figure 5617: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

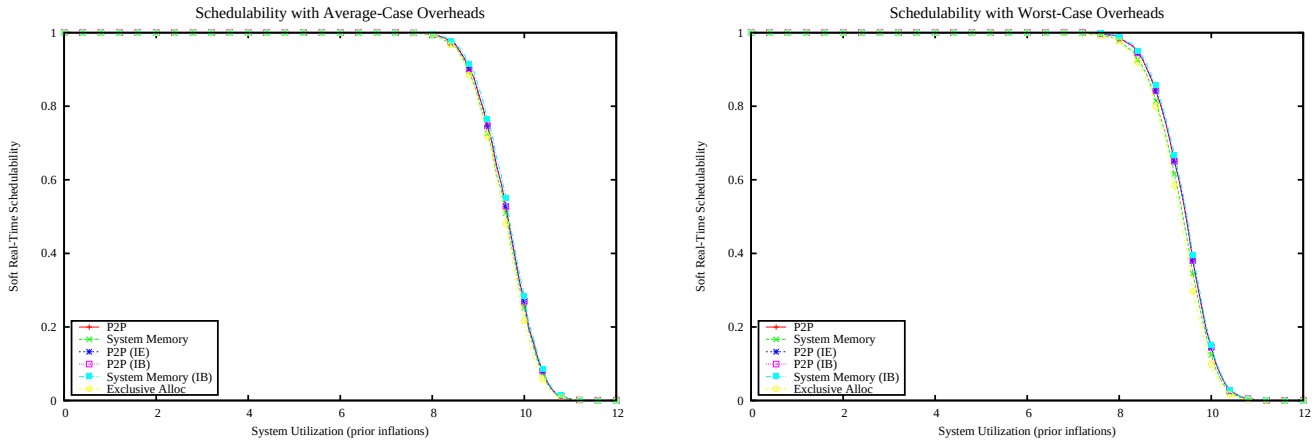

Figure 5618: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

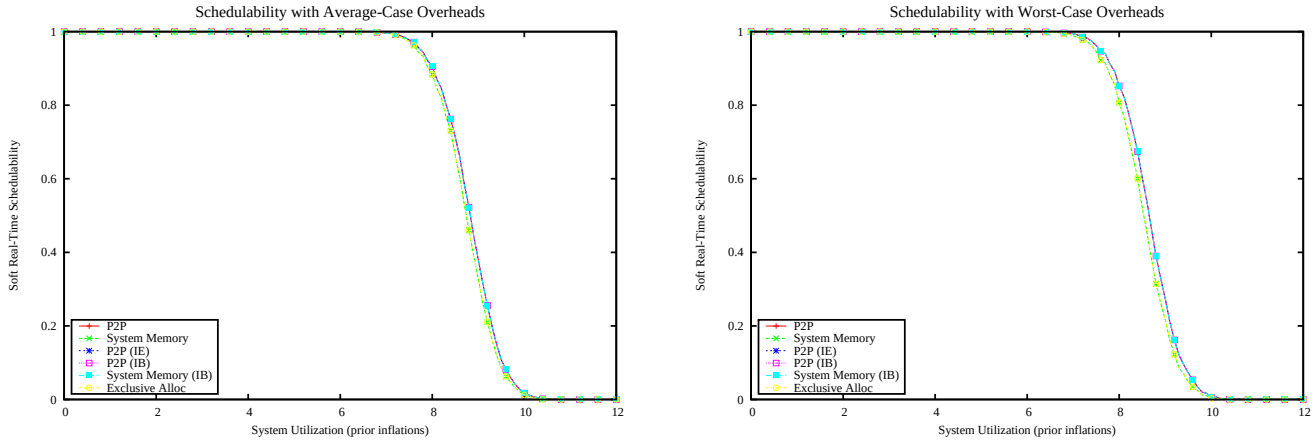

Figure 5619: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

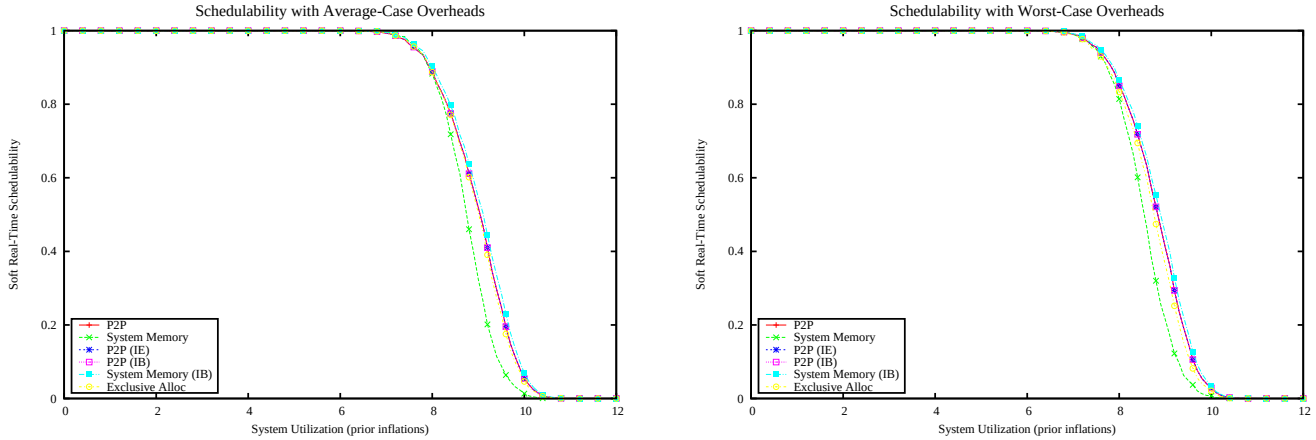

Figure 5620: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

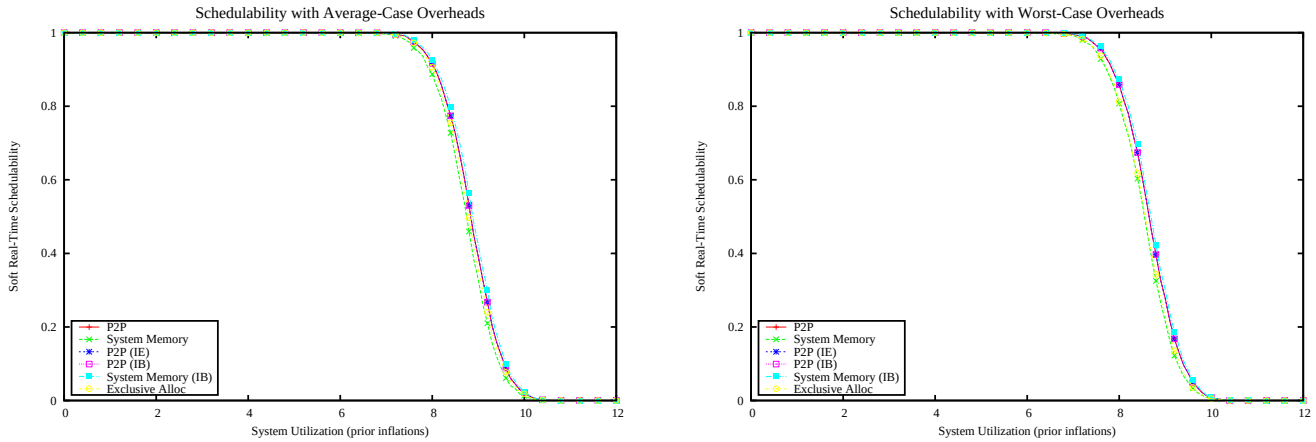

Figure 5621: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

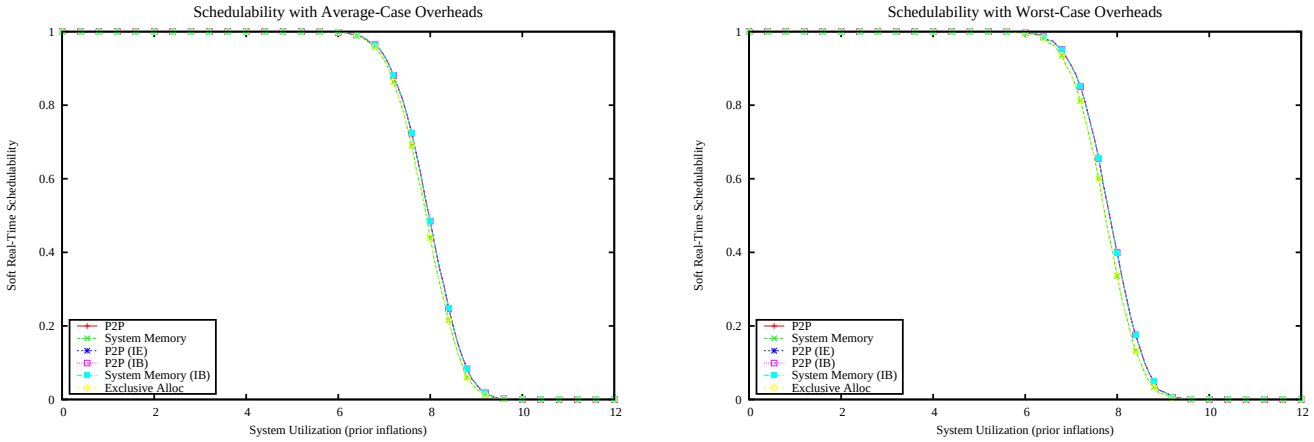

Figure 5622: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

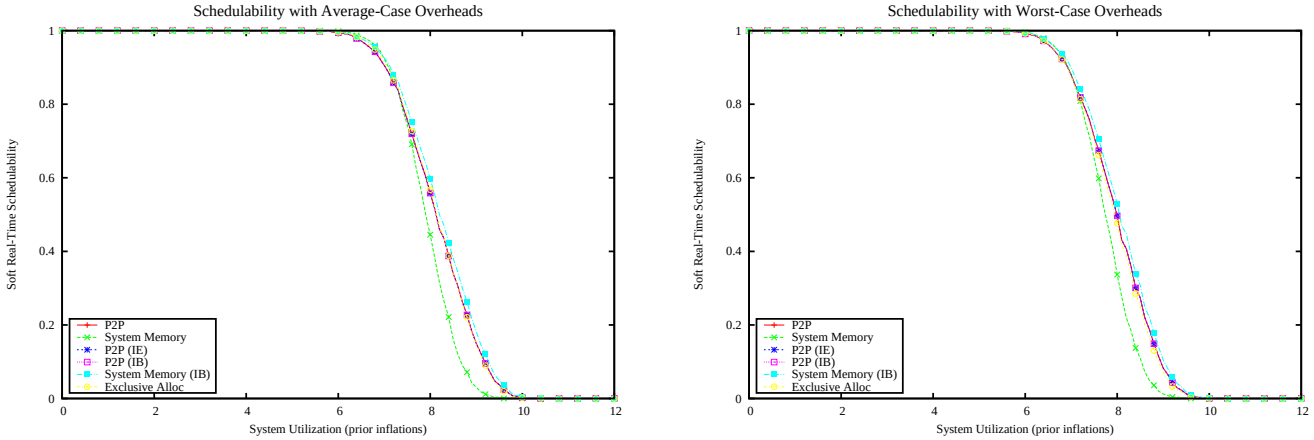

Figure 5623: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

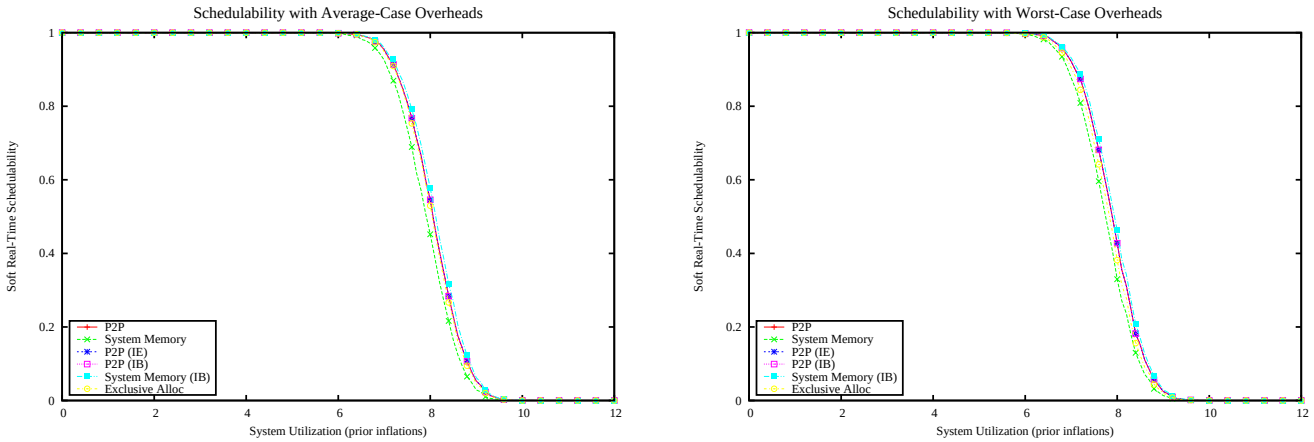

Figure 5624: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

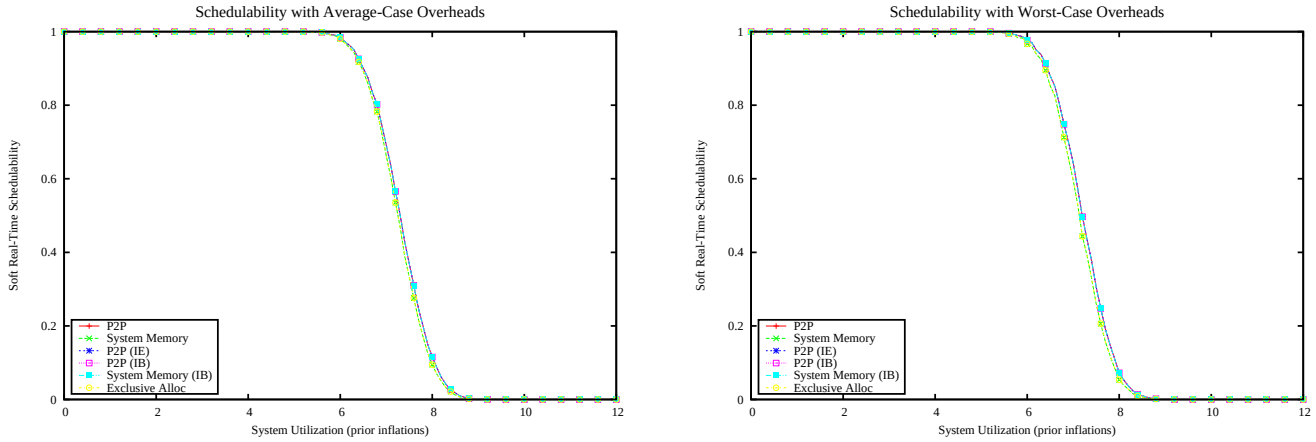

Figure 5625: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

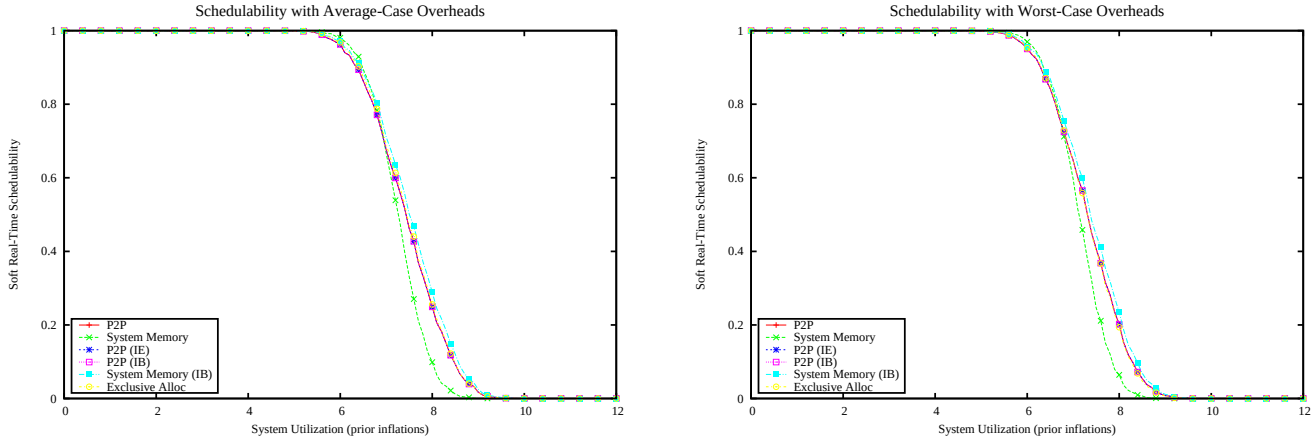

Figure 5626: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

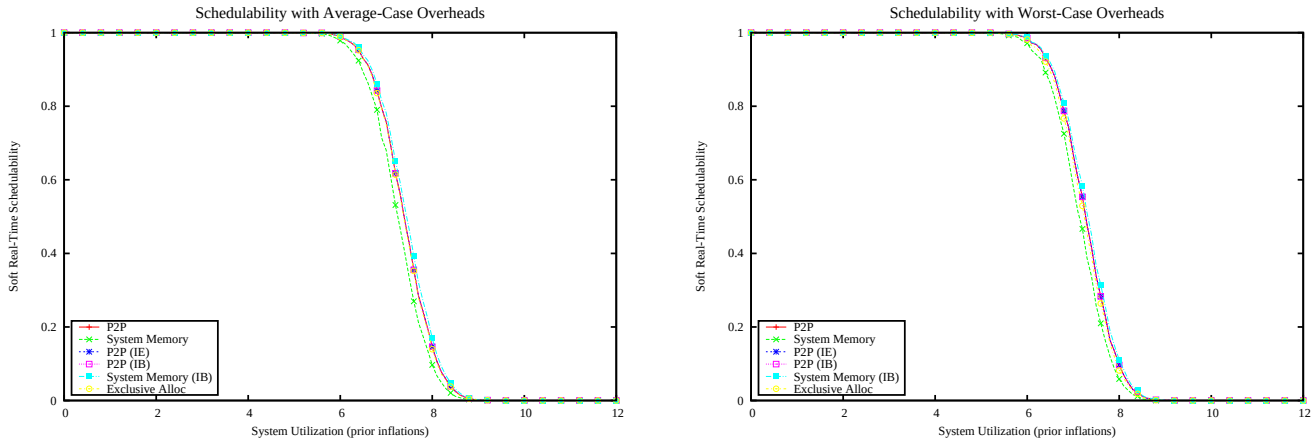

Figure 5627: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

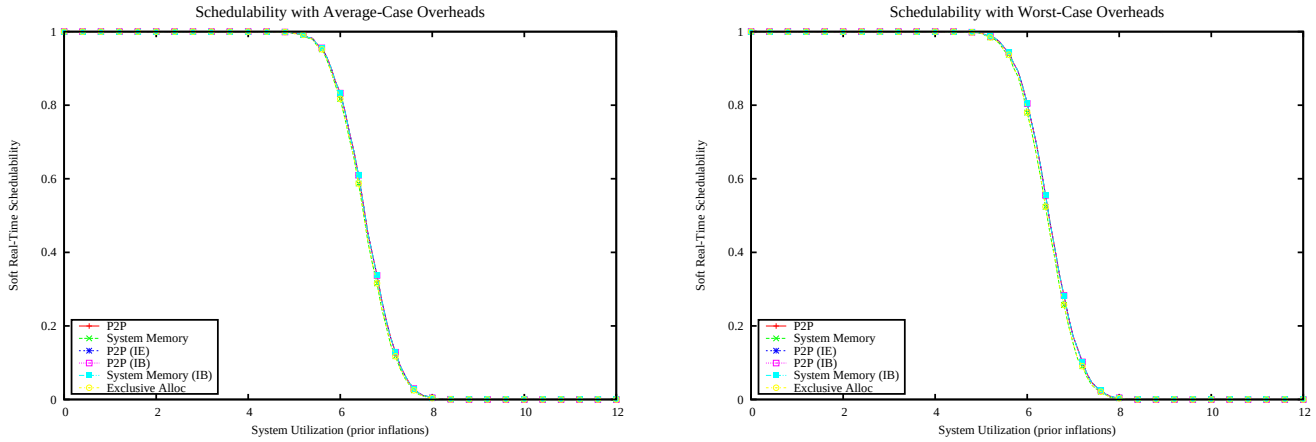

Figure 5628: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

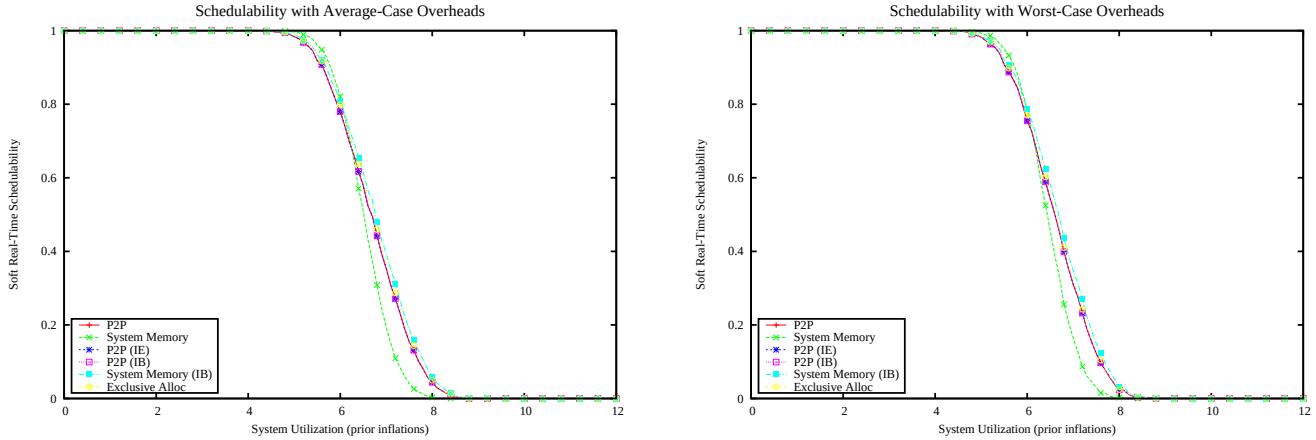

Figure 5629: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

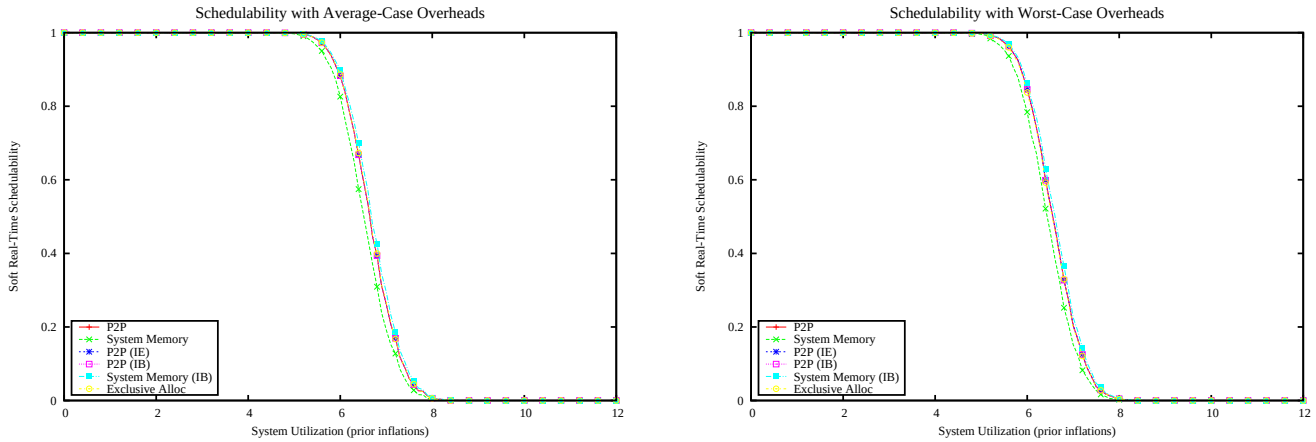

Figure 5630: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

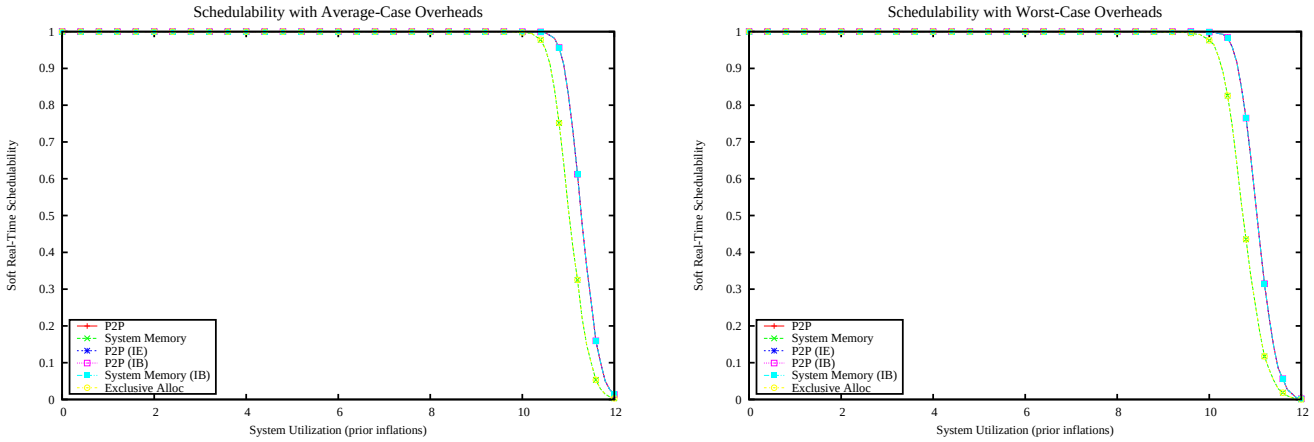

Figure 5631: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

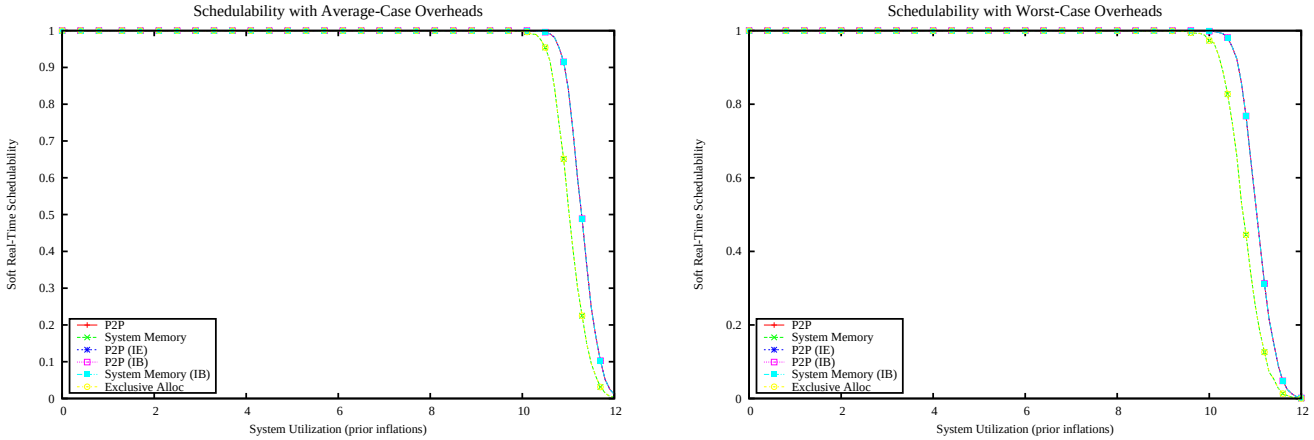

Figure 5632: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

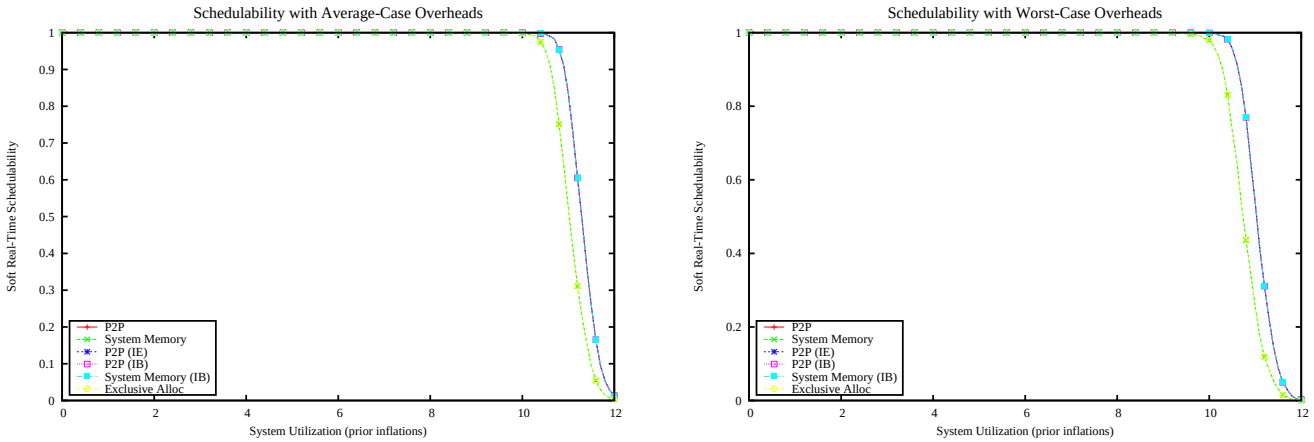

Figure 5633: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

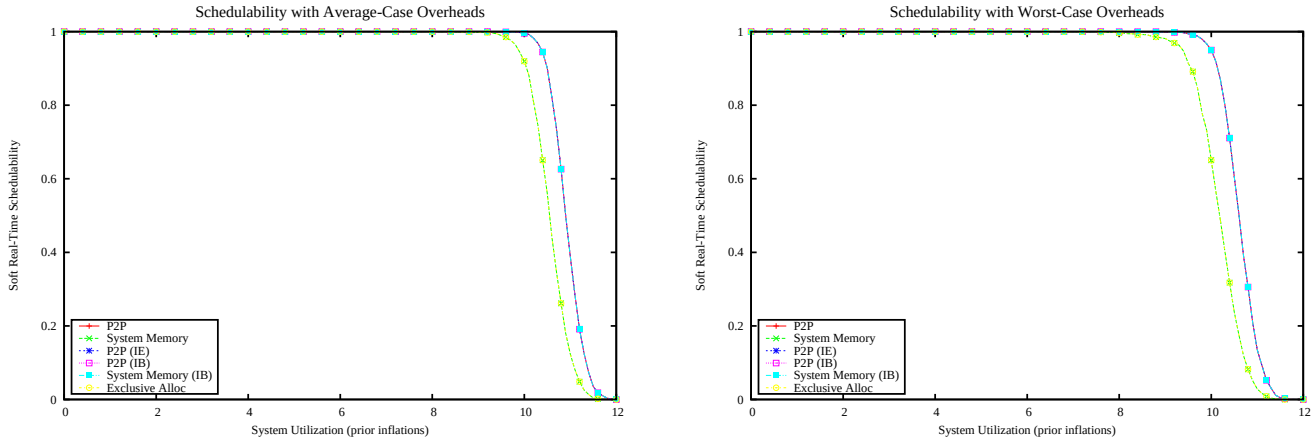

Figure 5634: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

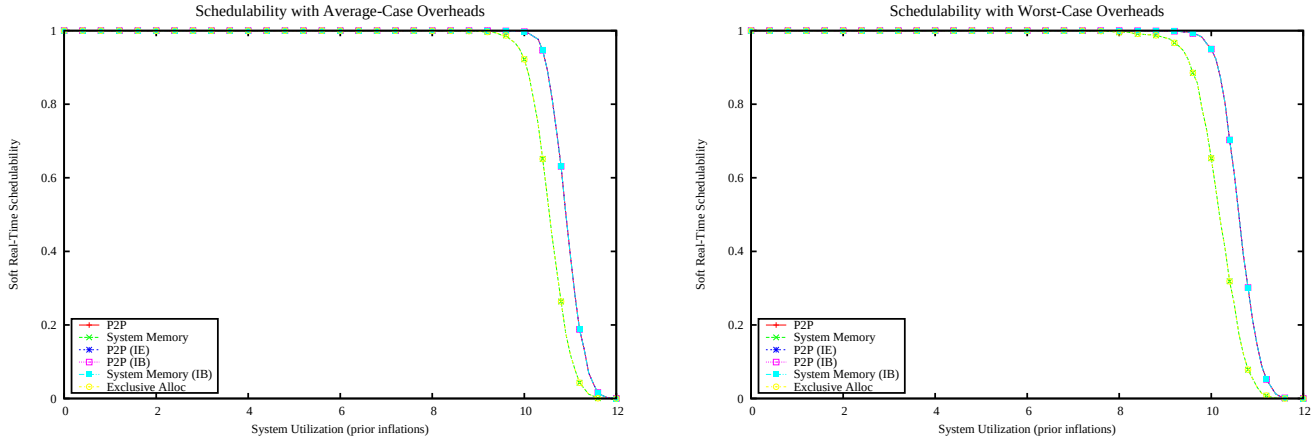

Figure 5635: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

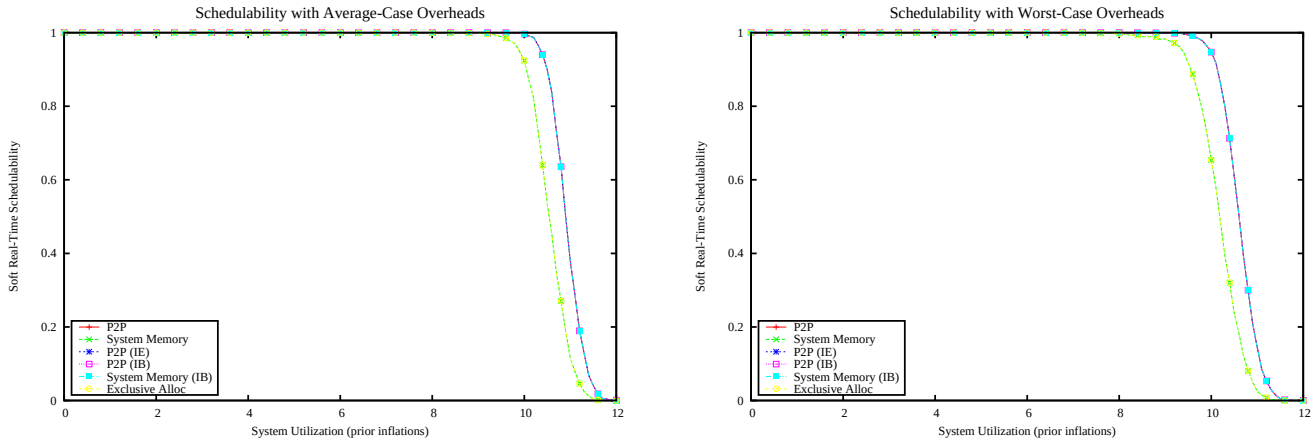

Figure 5636: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

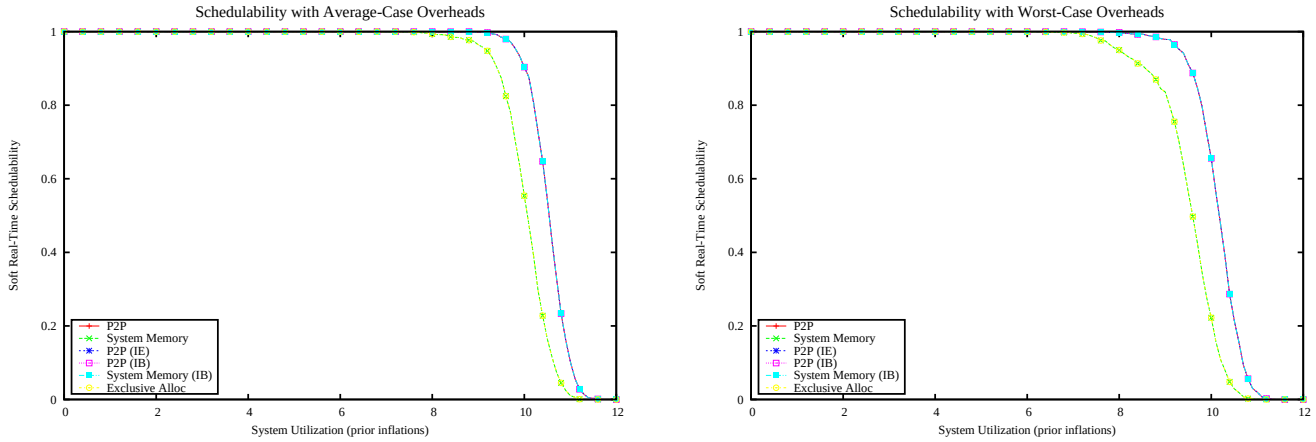

Figure 5637: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

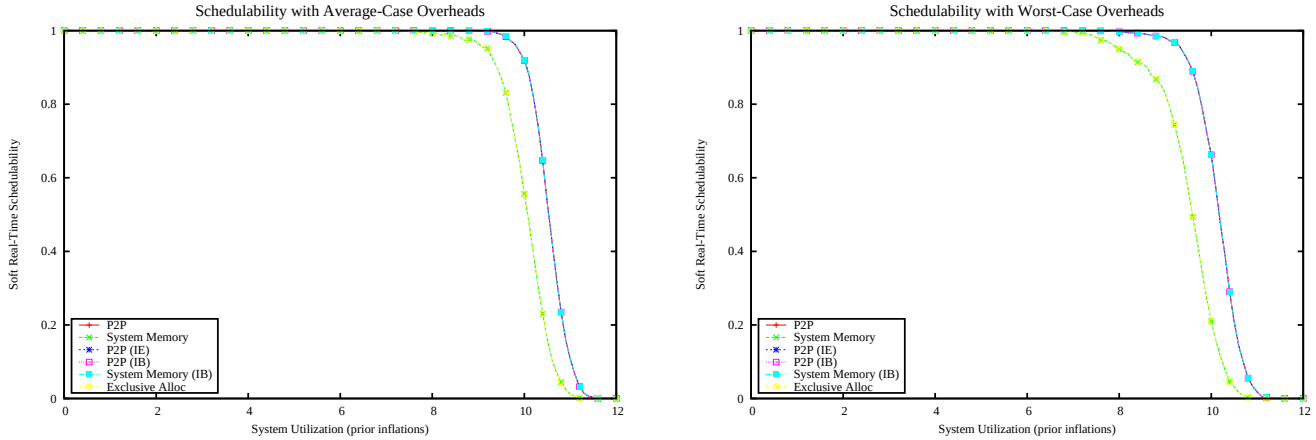

Figure 5638: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

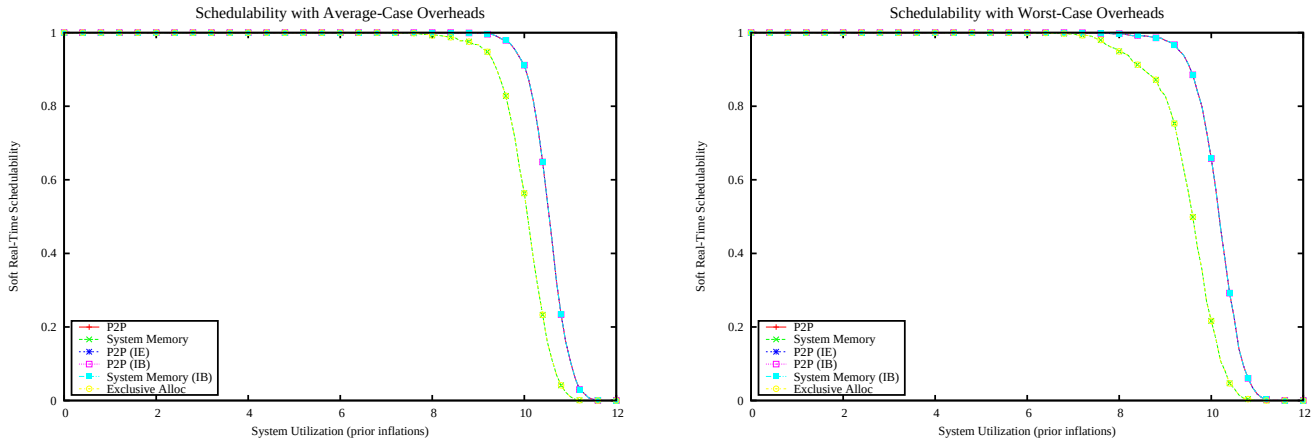

Figure 5639: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

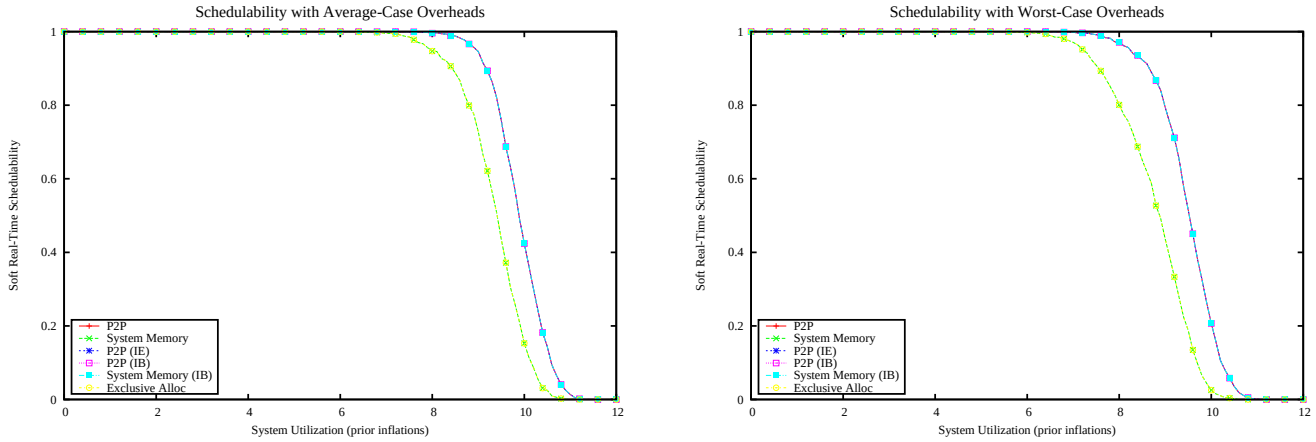

Figure 5640: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

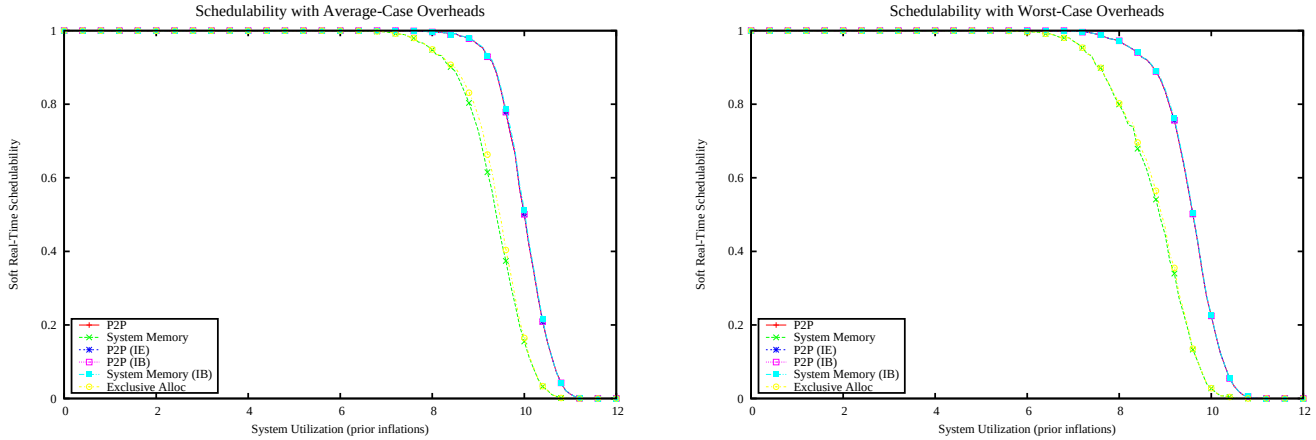

Figure 5641: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

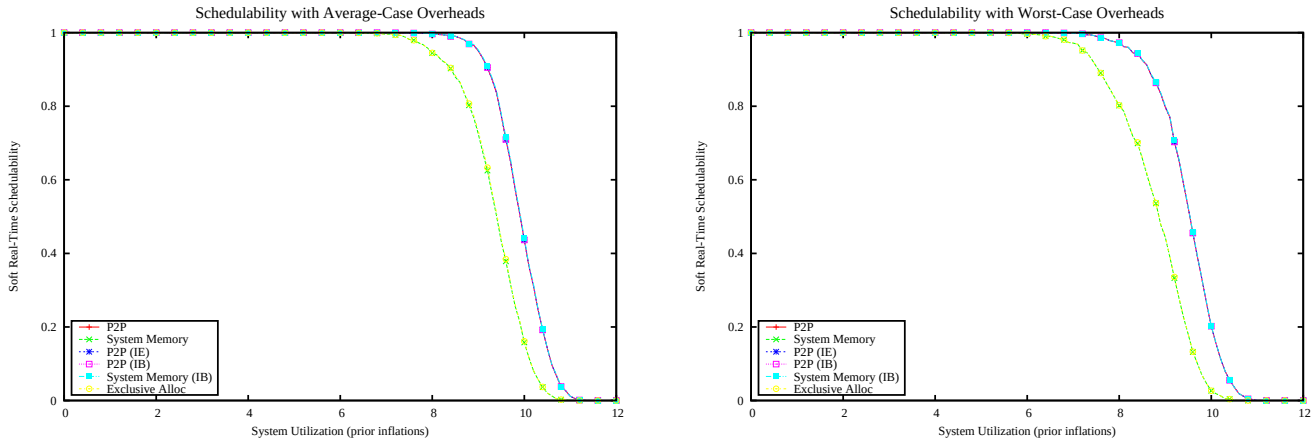

Figure 5642: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

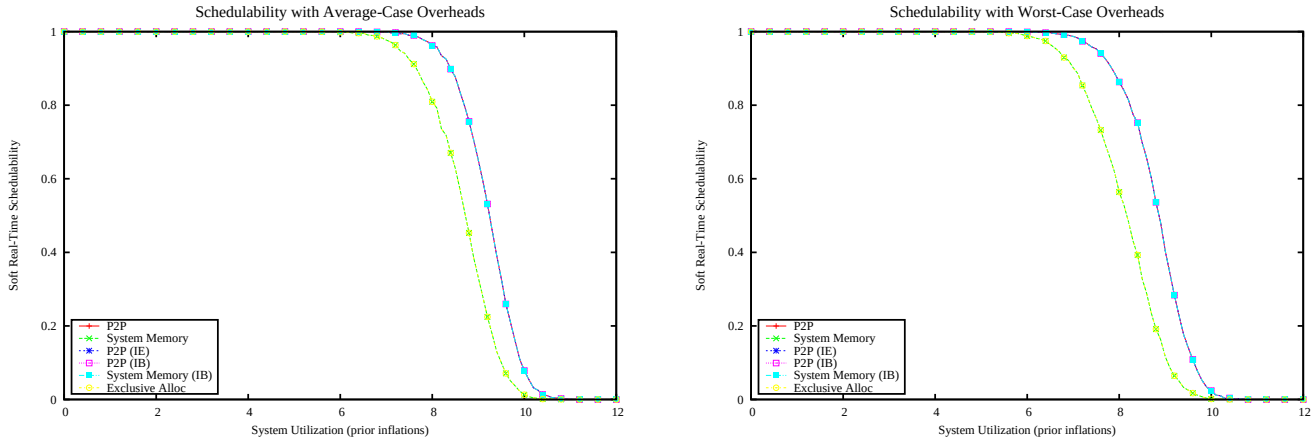

Figure 5643: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

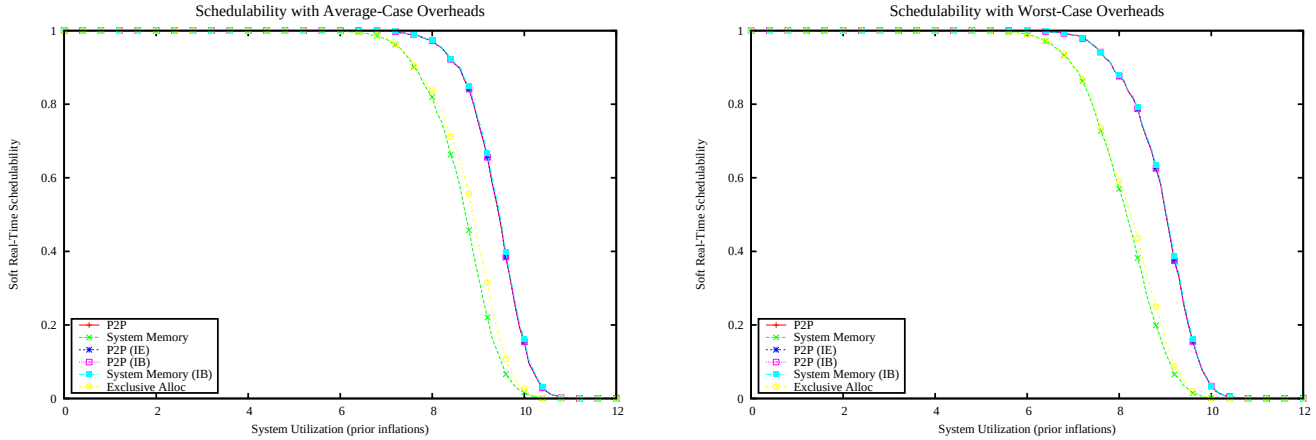

Figure 5644: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

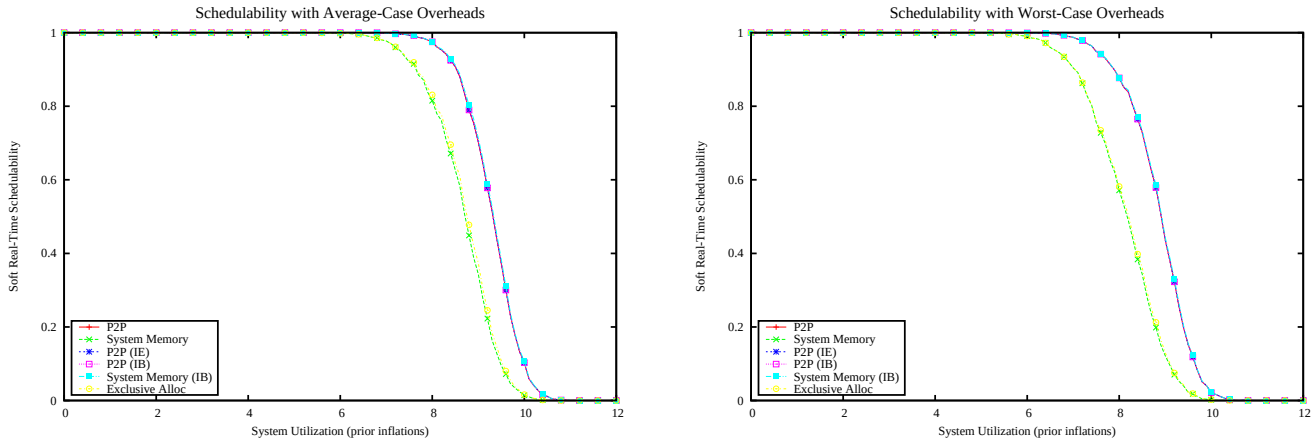

Figure 5645: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

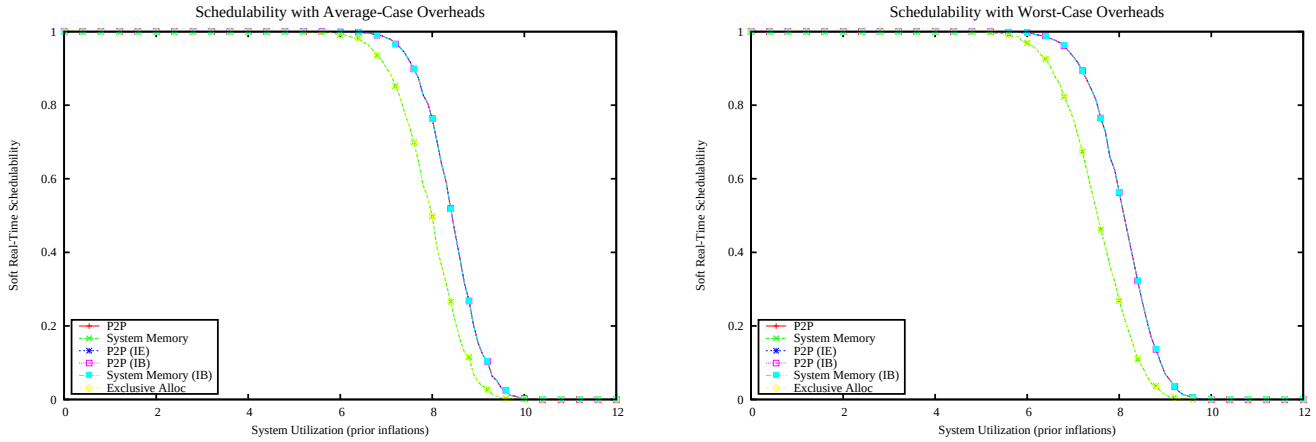

Figure 5646: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

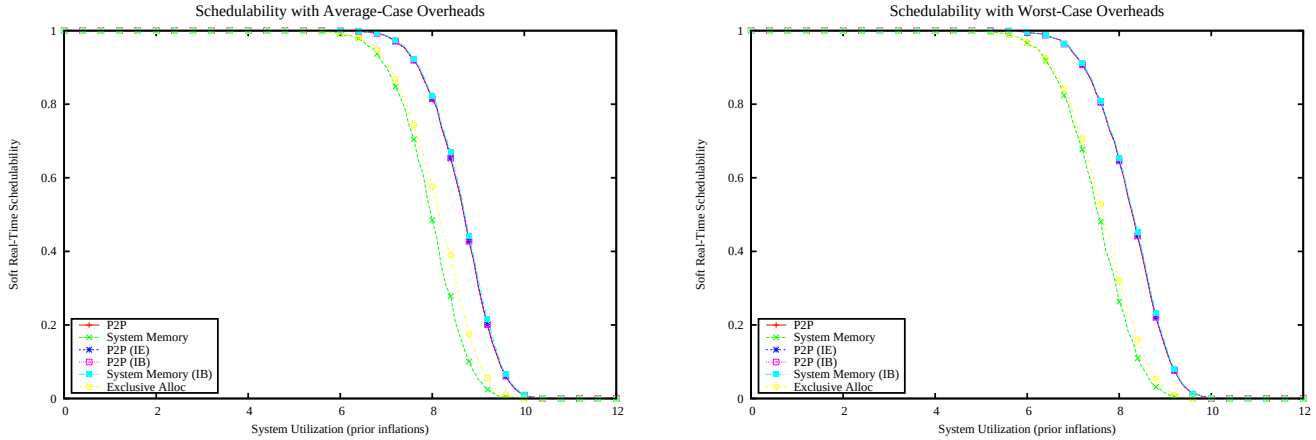

Figure 5647: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

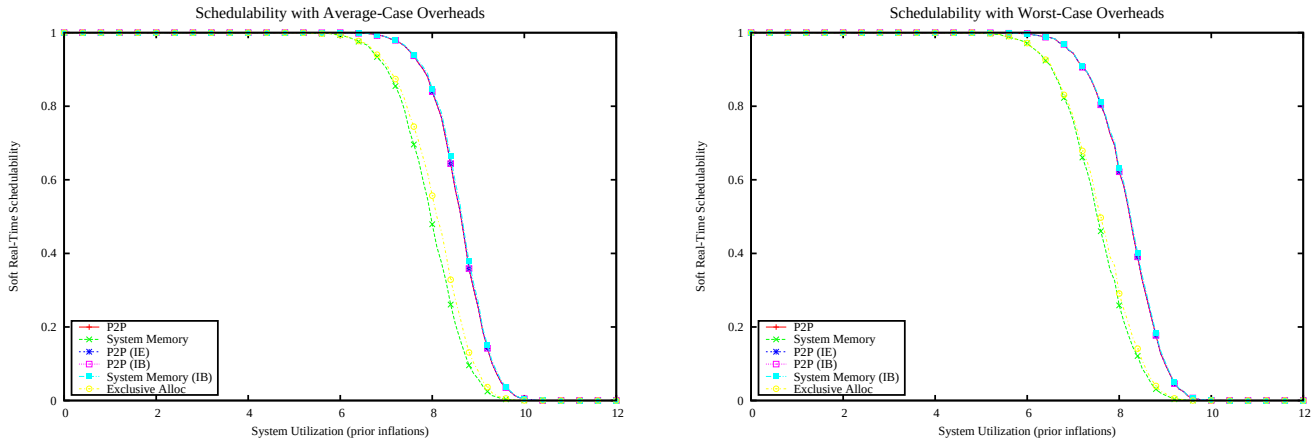

Figure 5648: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

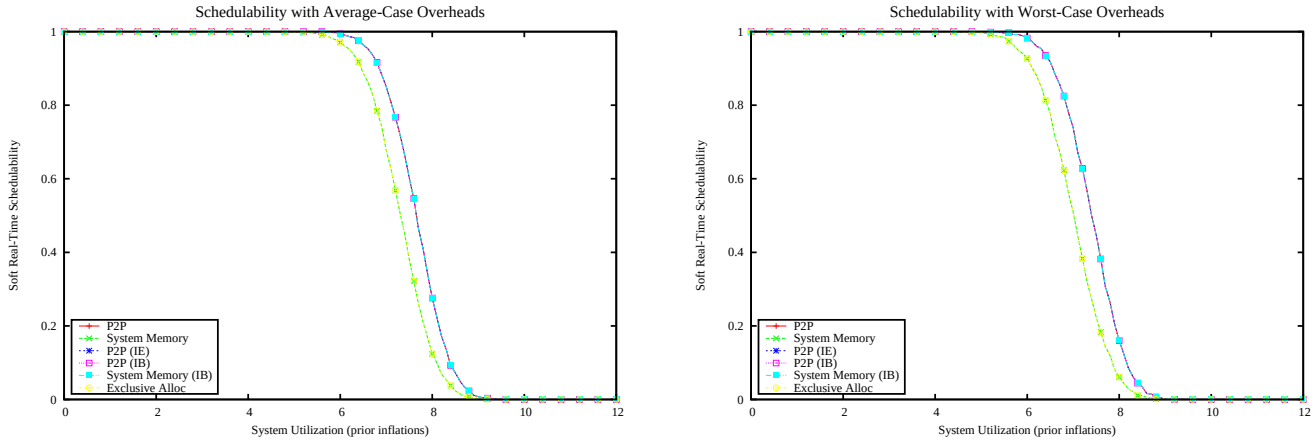

Figure 5649: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

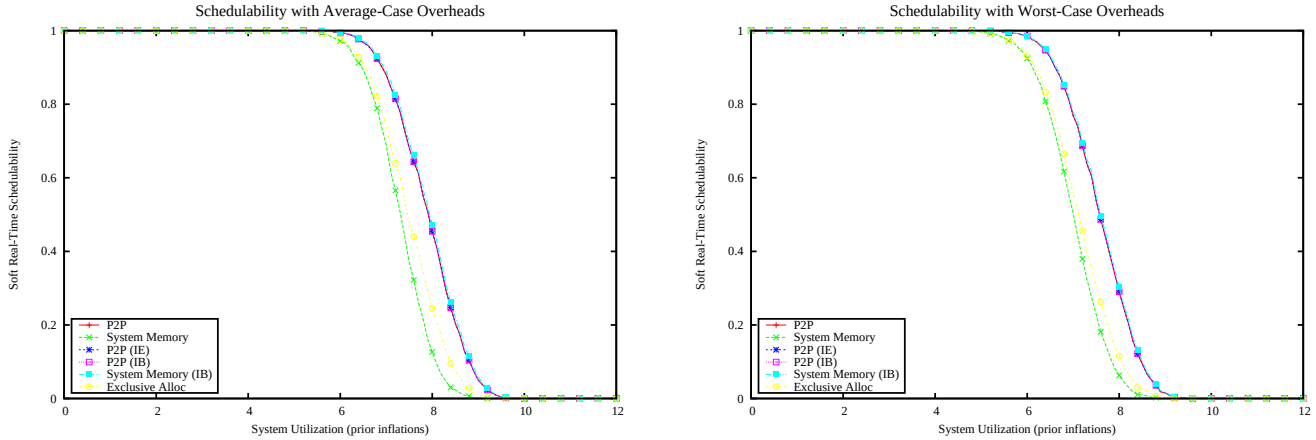

Figure 5650: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

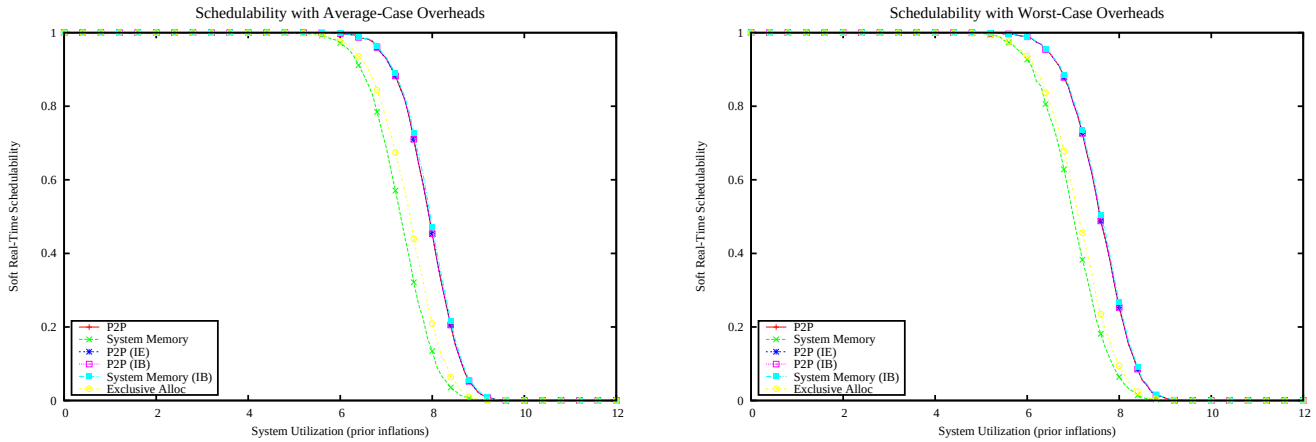

Figure 5651: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

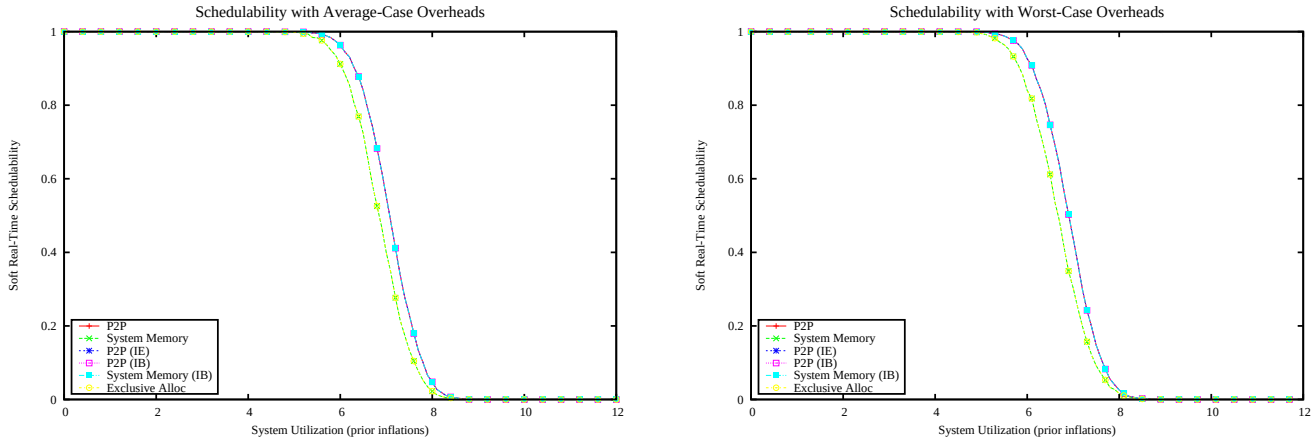

Figure 5652: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

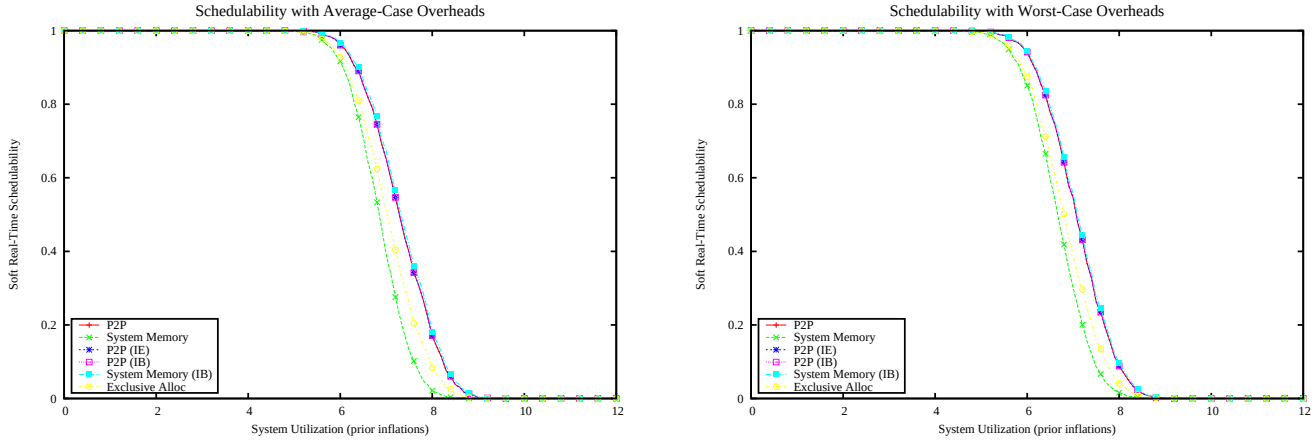

Figure 5653: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

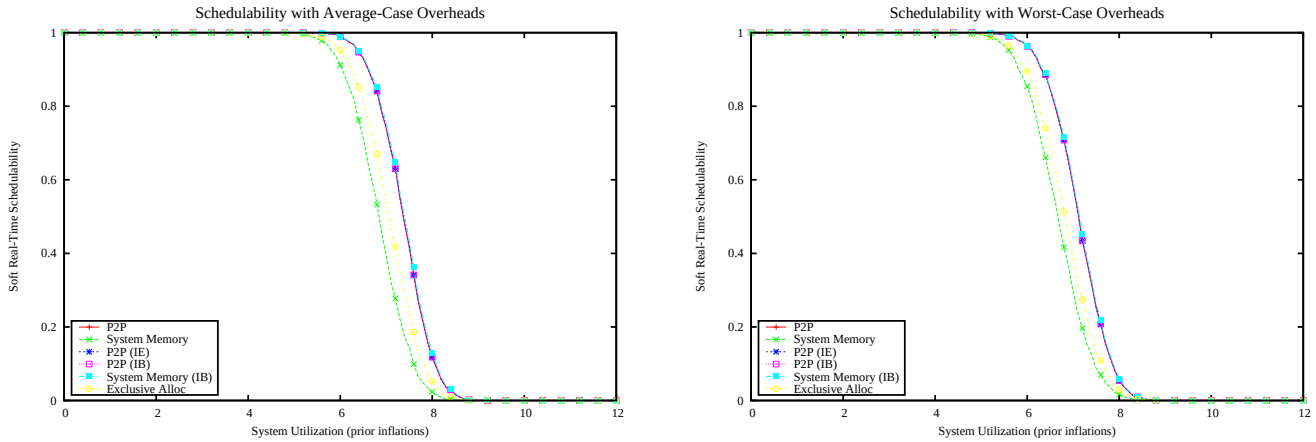

Figure 5654: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

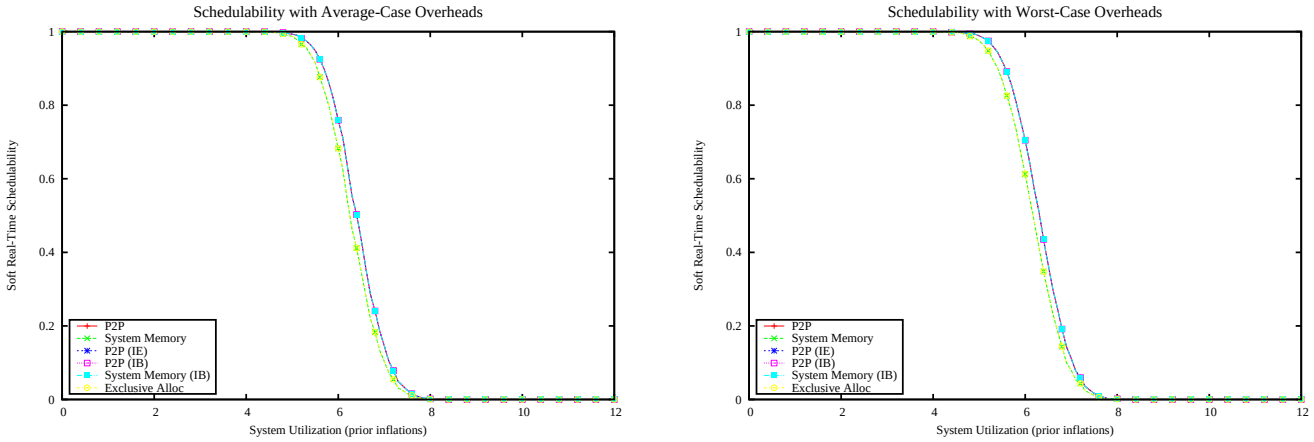

Figure 5655: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

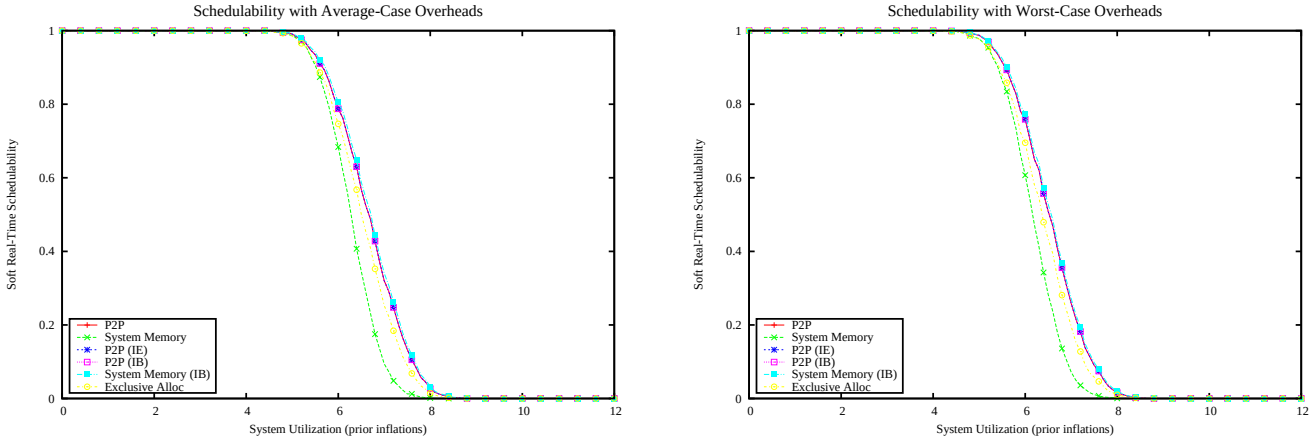

Figure 5656: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

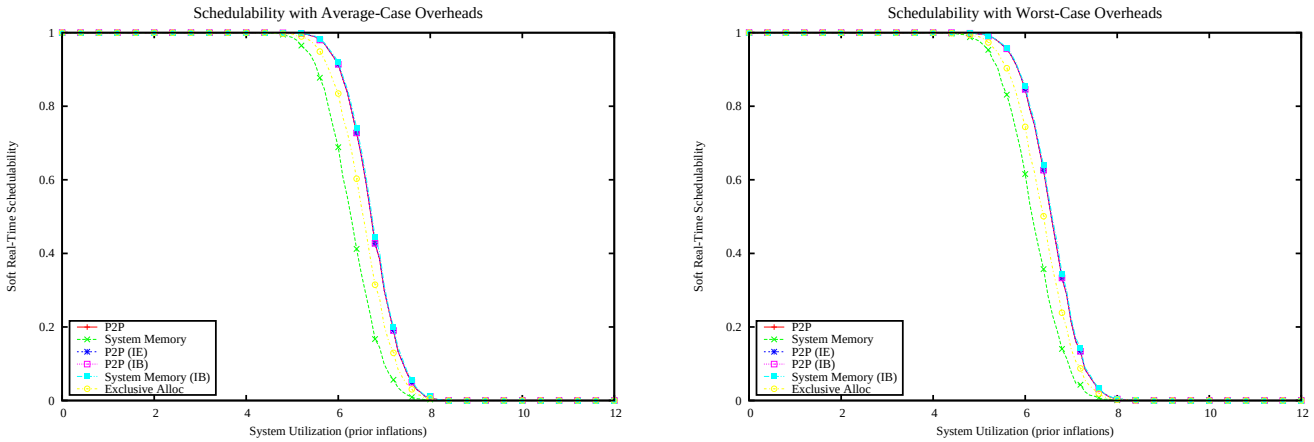

Figure 5657: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

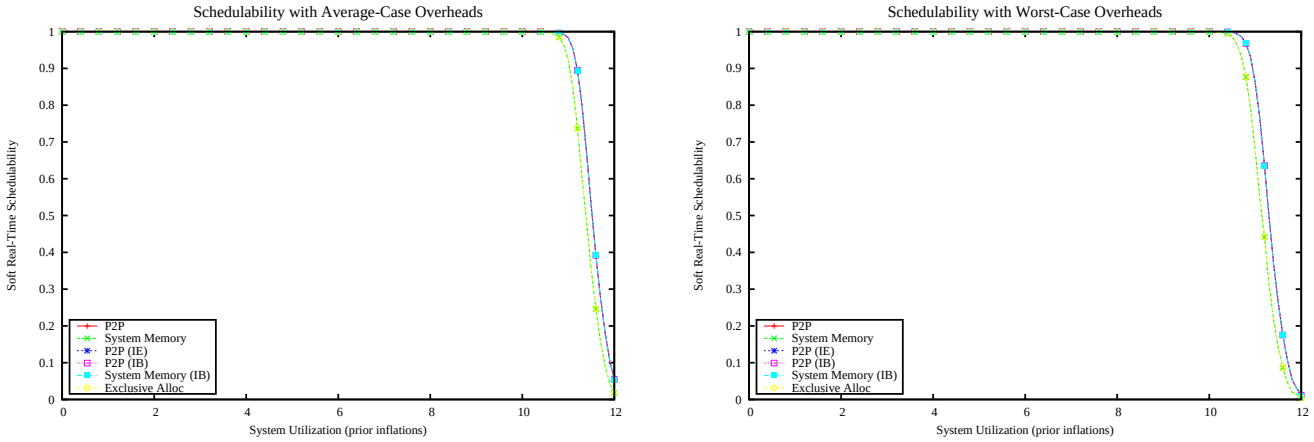

Figure 5658: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

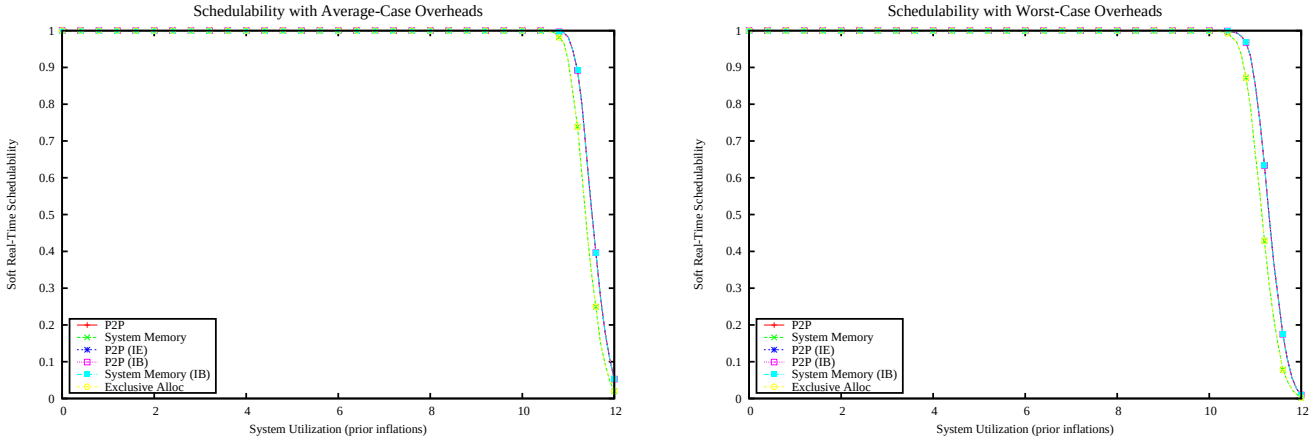

Figure 5659: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

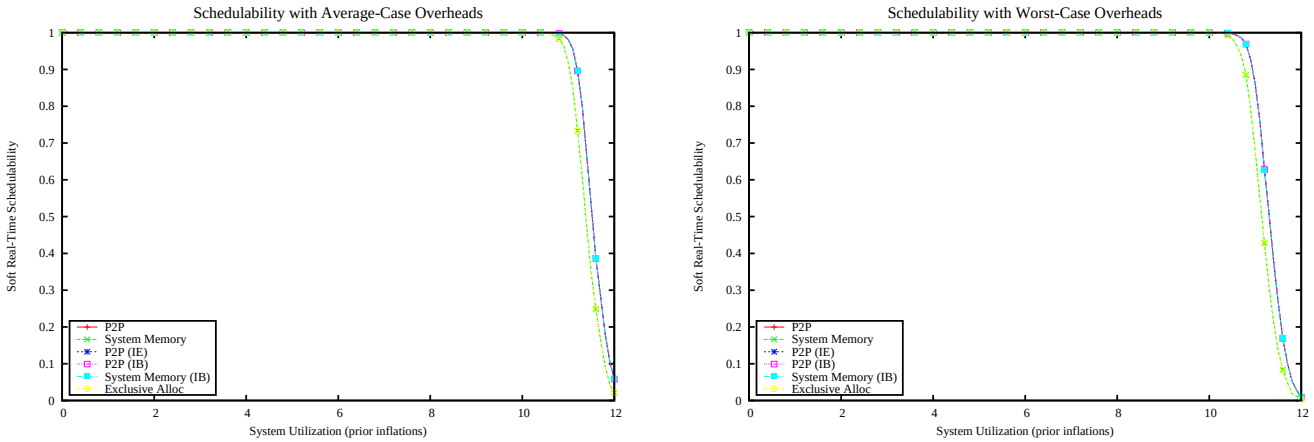

Figure 5660: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

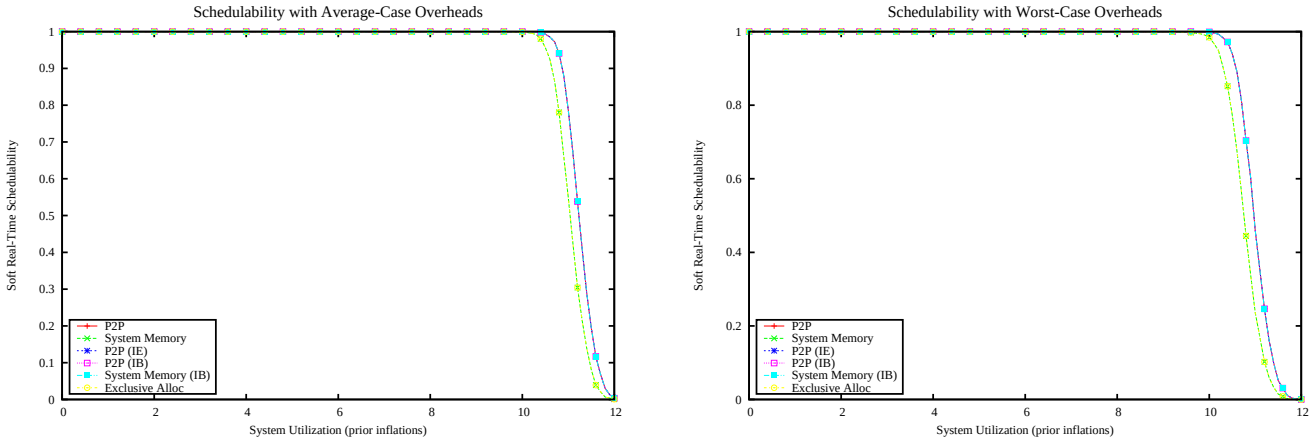

Figure 5661: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

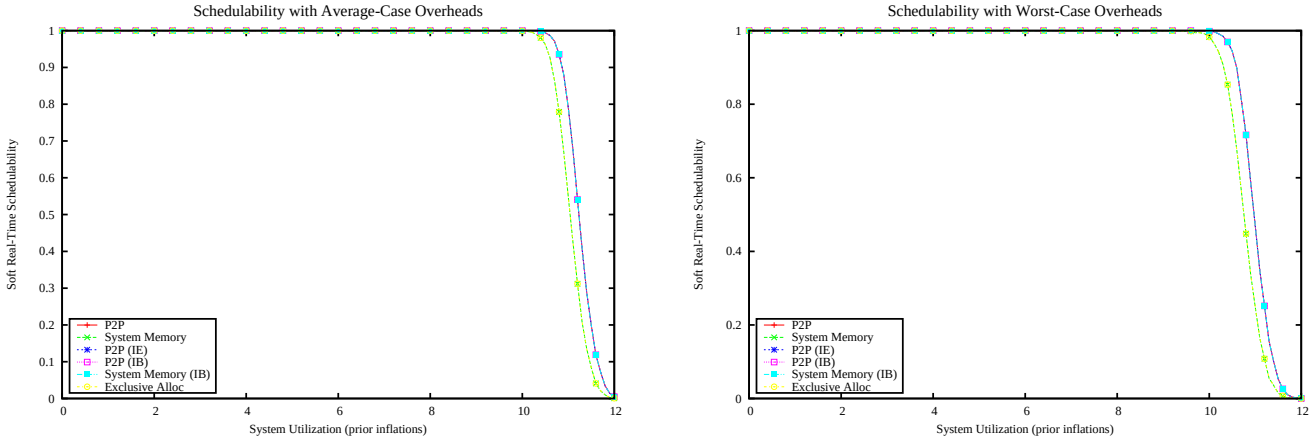

Figure 5662: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

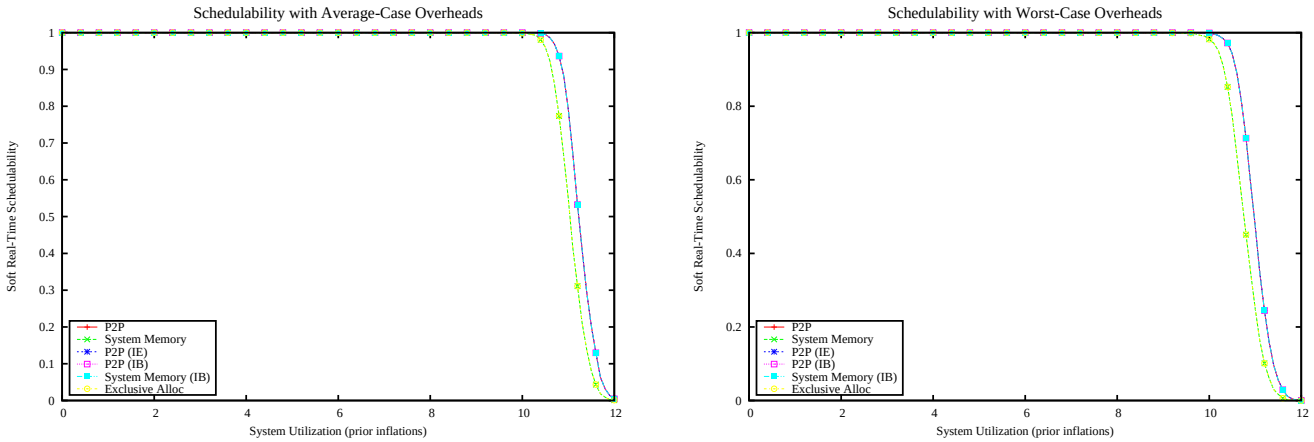

Figure 5663: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

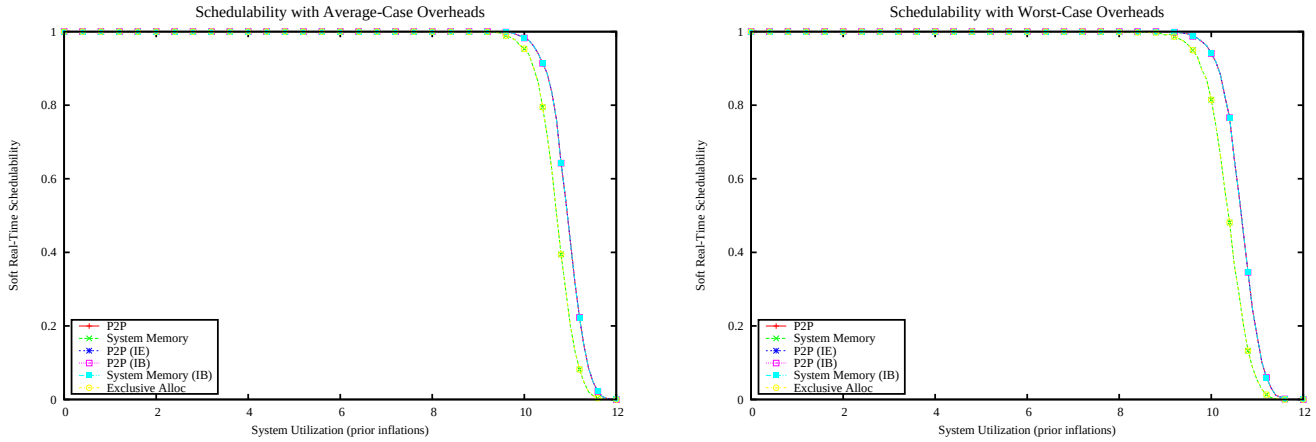

Figure 5664: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

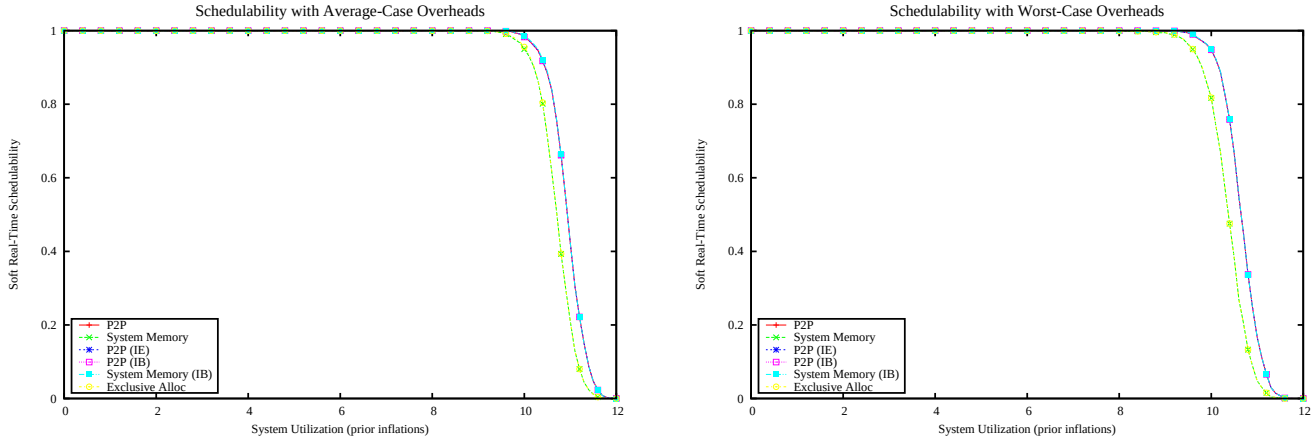

Figure 5665: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

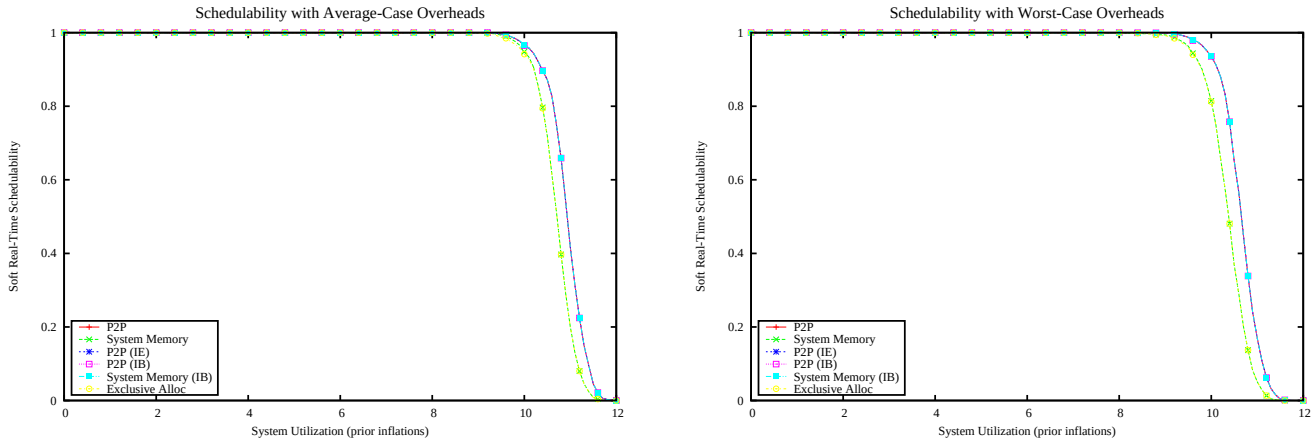

Figure 5666: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

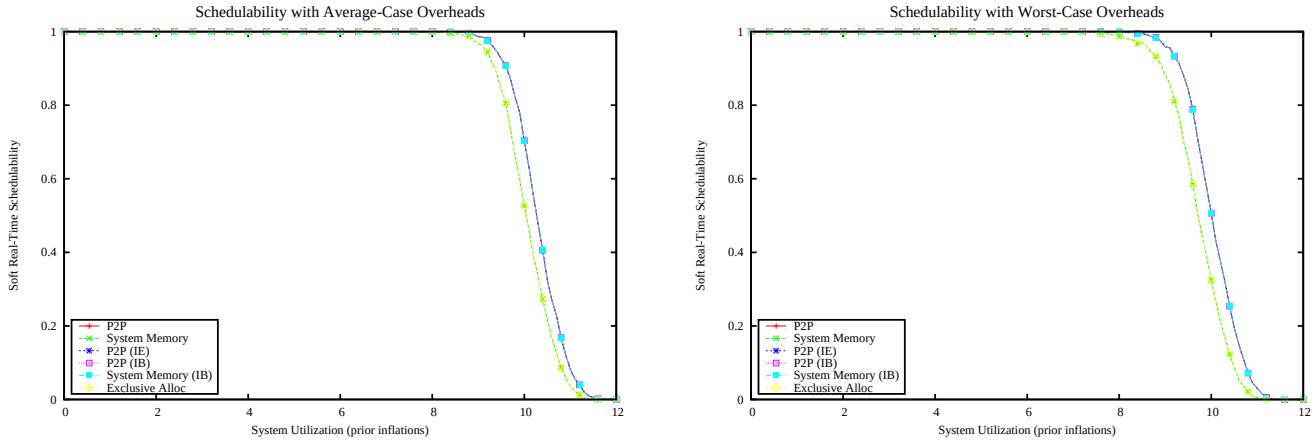

Figure 5667: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

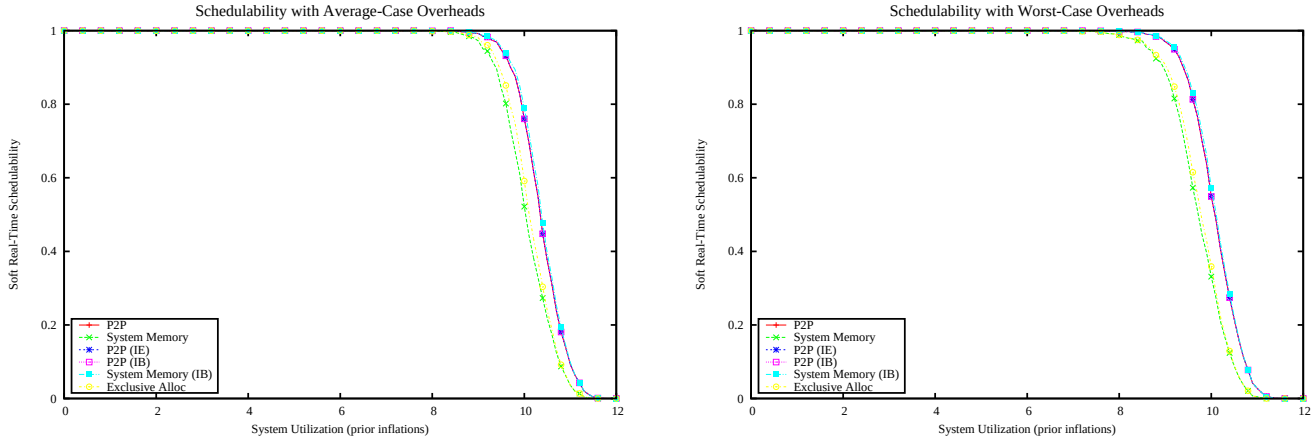

Figure 5668: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

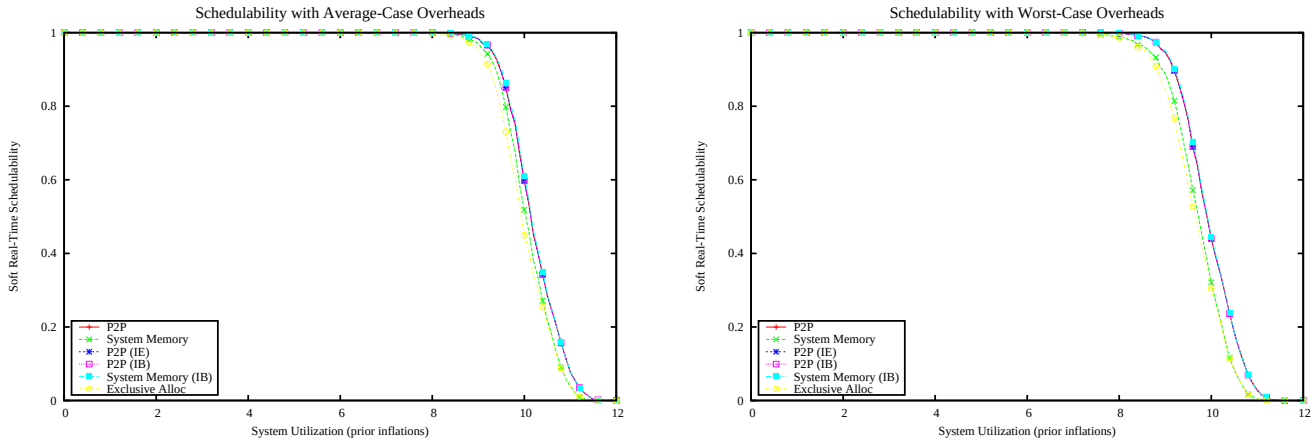

Figure 5669: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

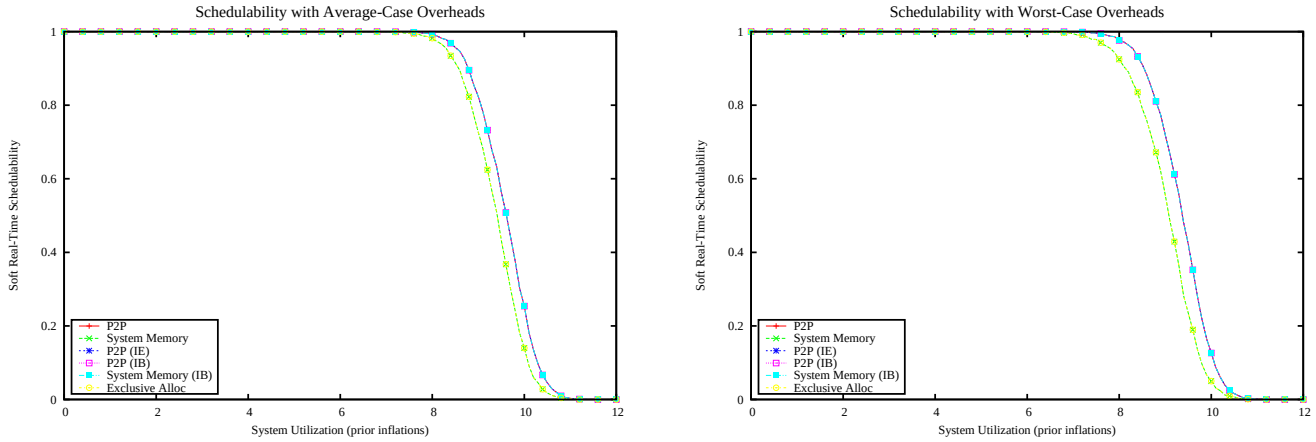

Figure 5670: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

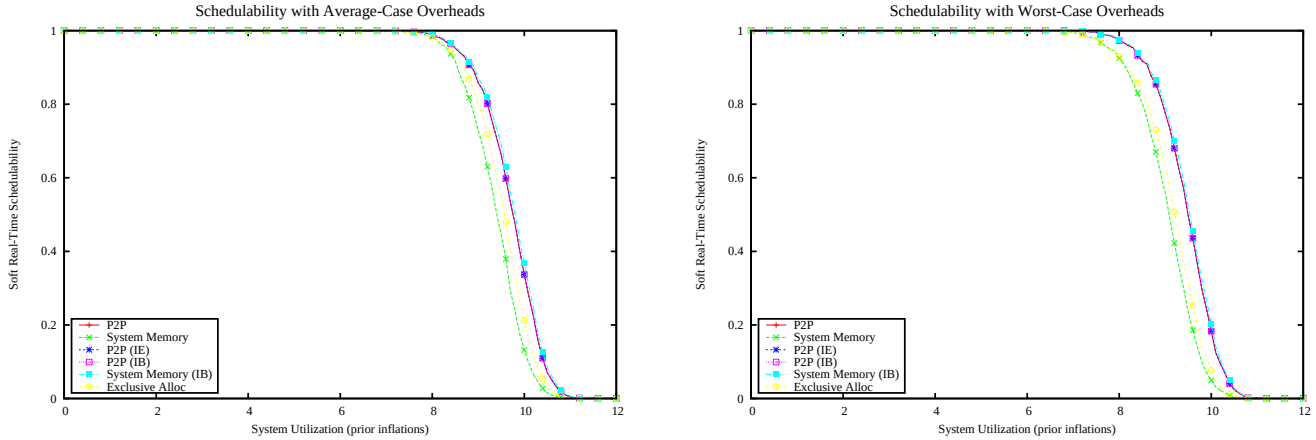

Figure 5671: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

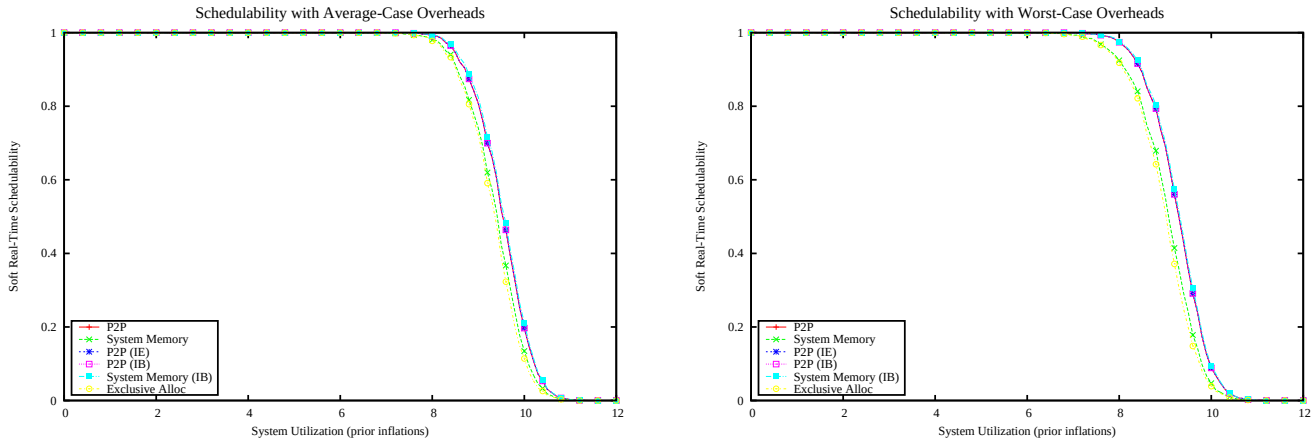

Figure 5672: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

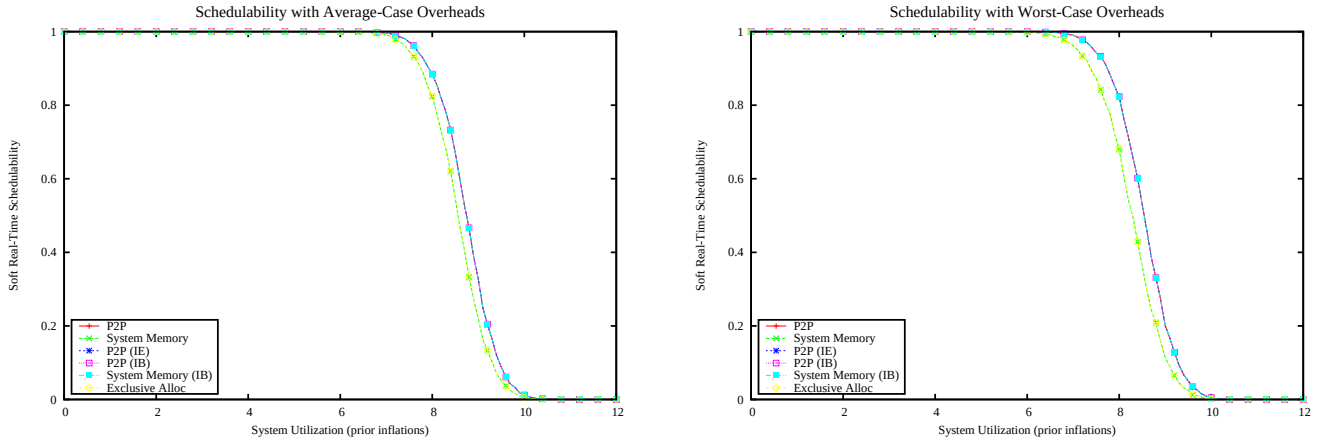

Figure 5673: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

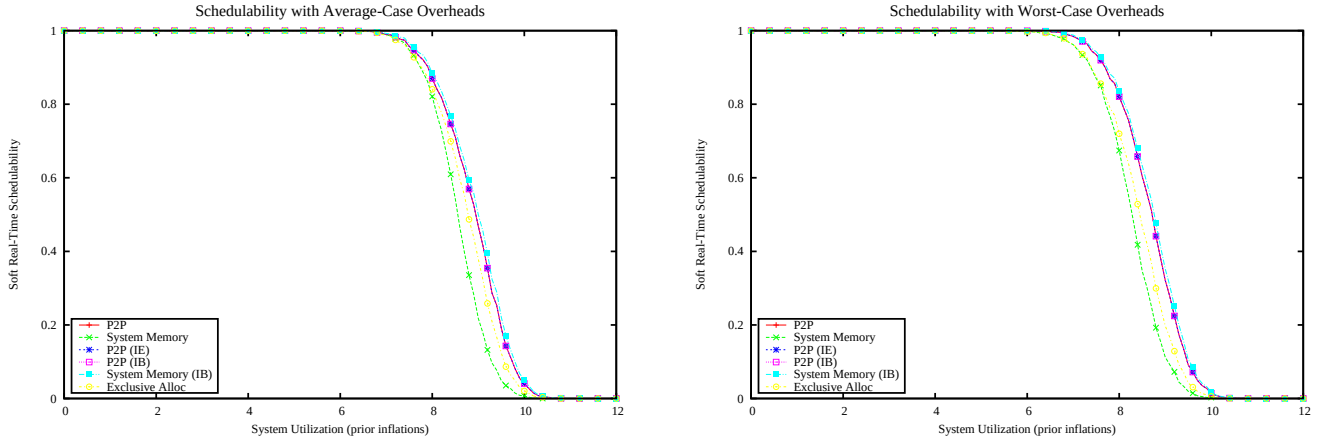

Figure 5674: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

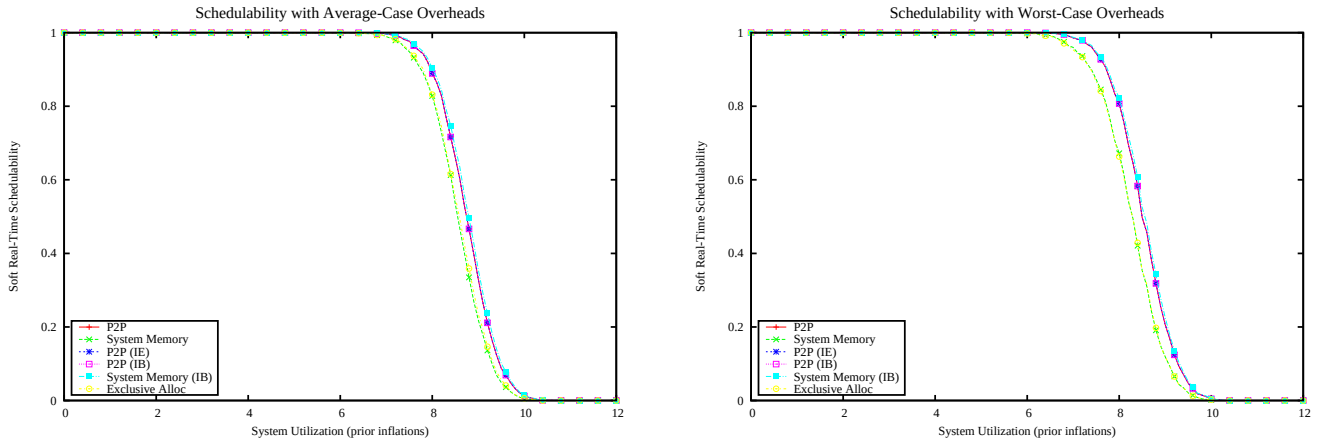

Figure 5675: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

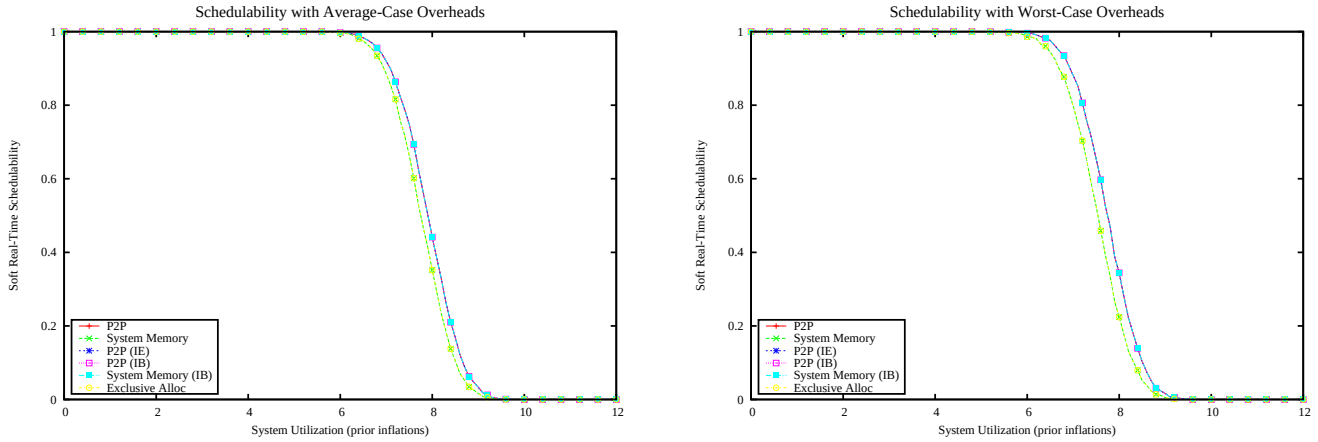

Figure 5676: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

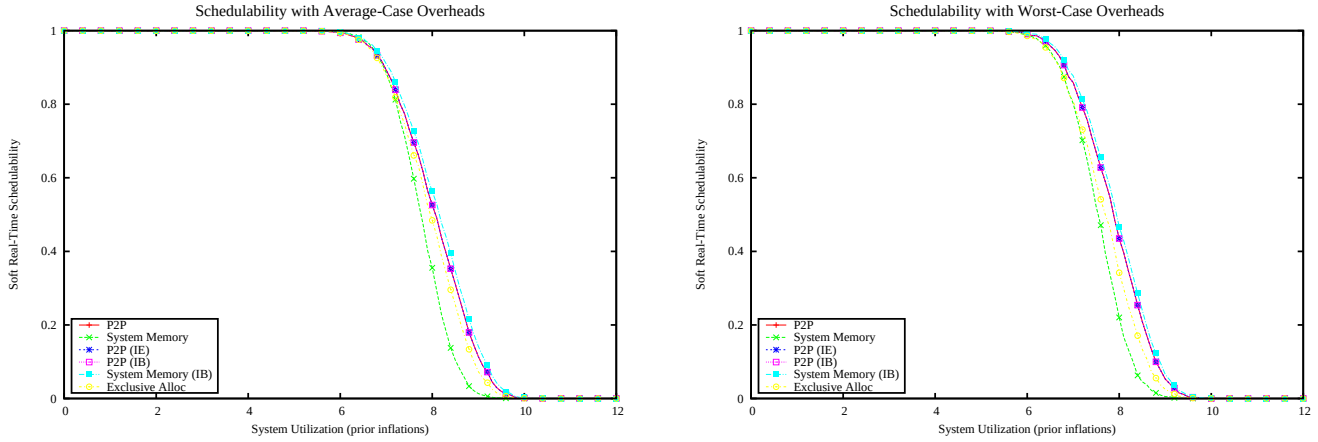

Figure 5677: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

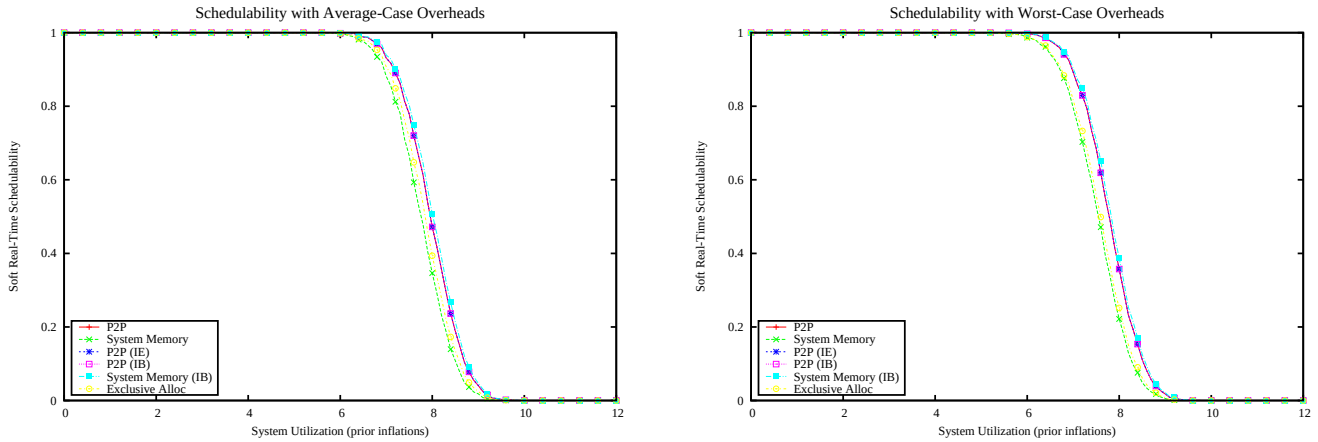

Figure 5678: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

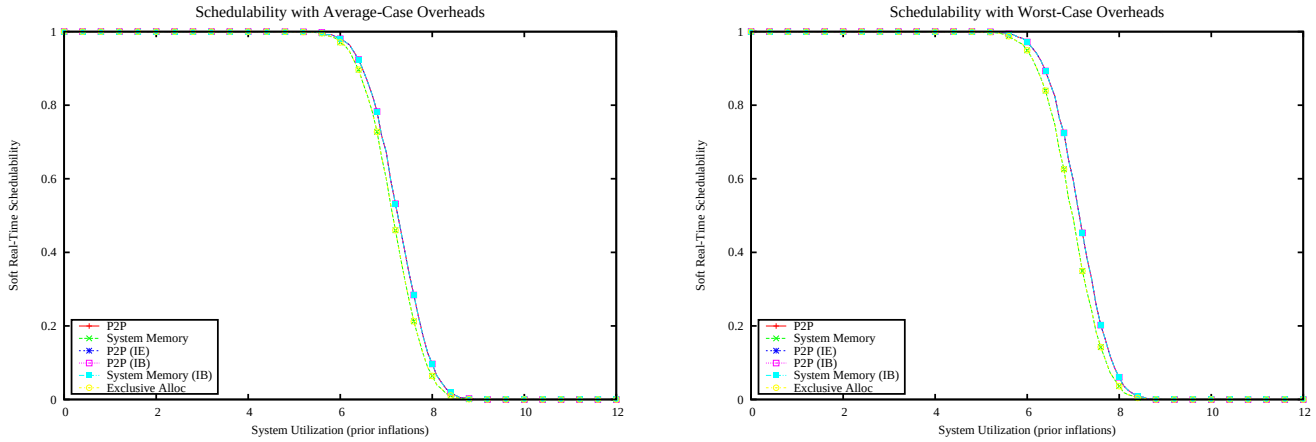

Figure 5679: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

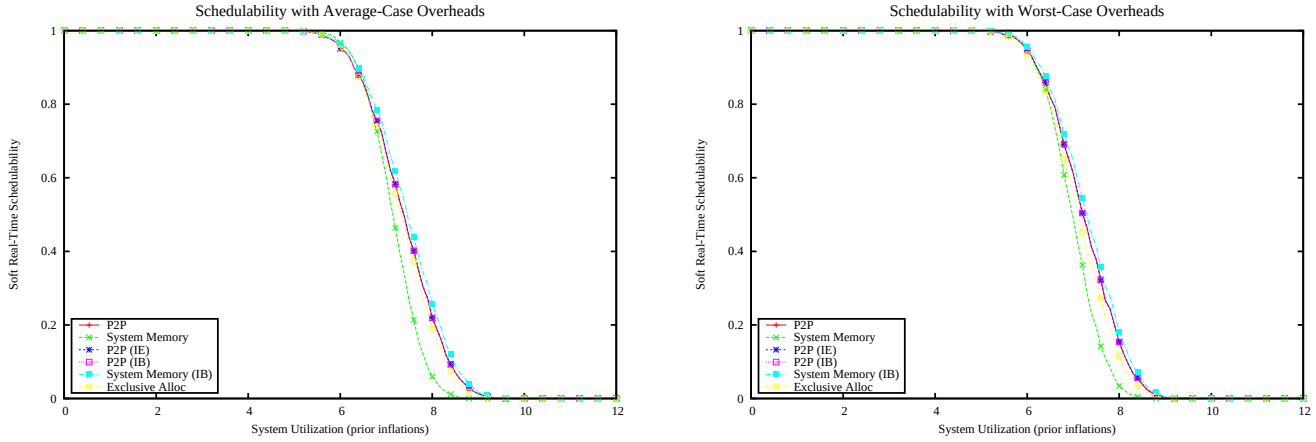

Figure 5680: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

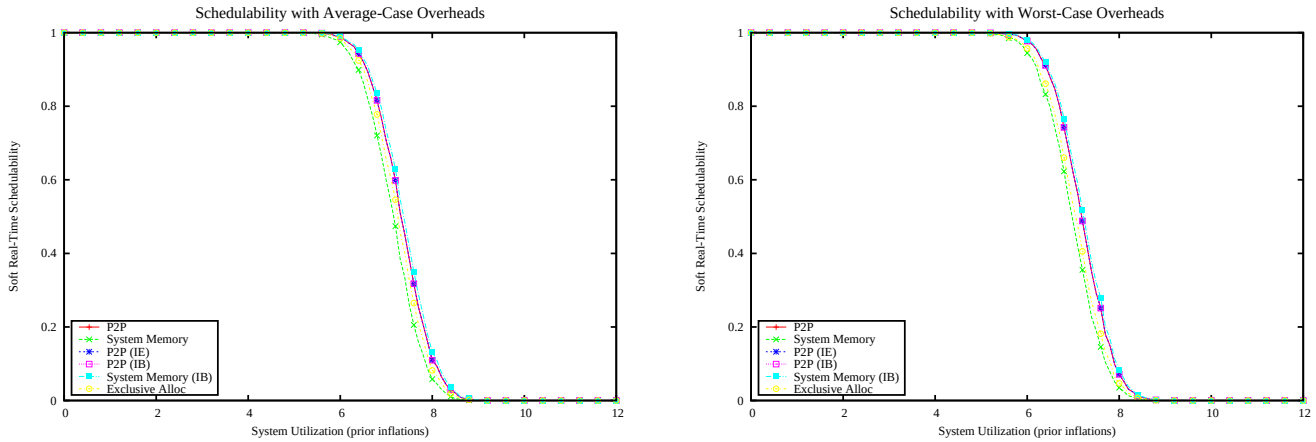

Figure 5681: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

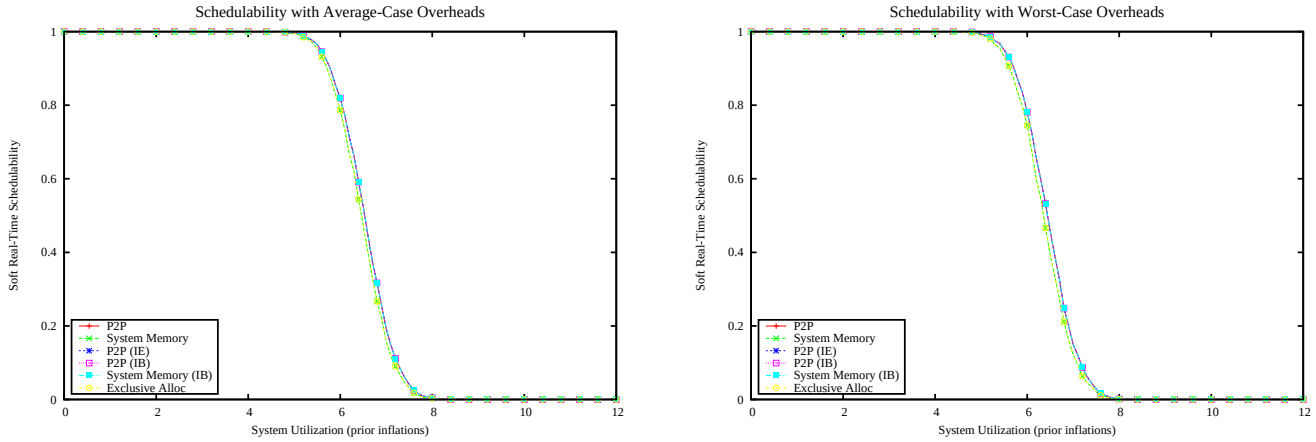

Figure 5682: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

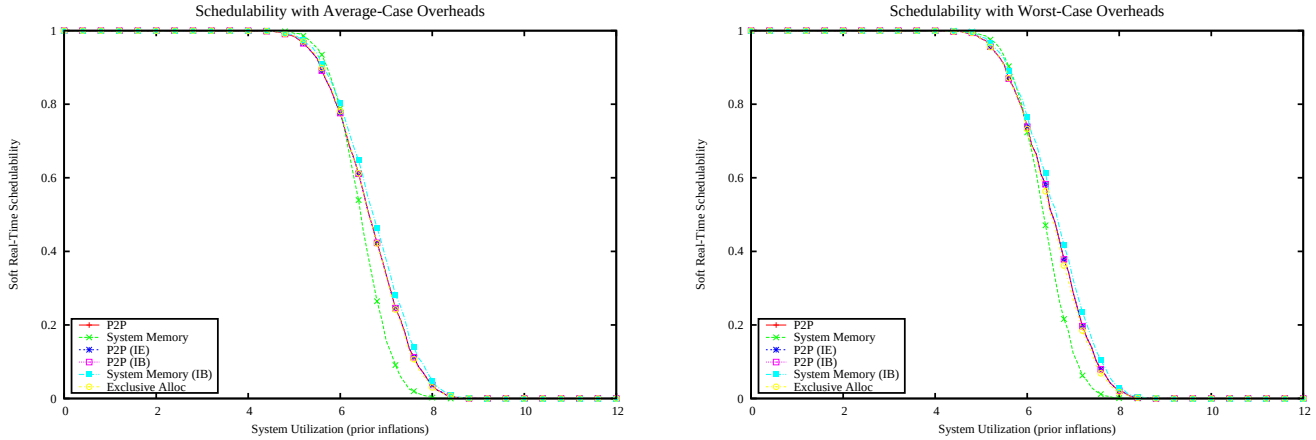

Figure 5683: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

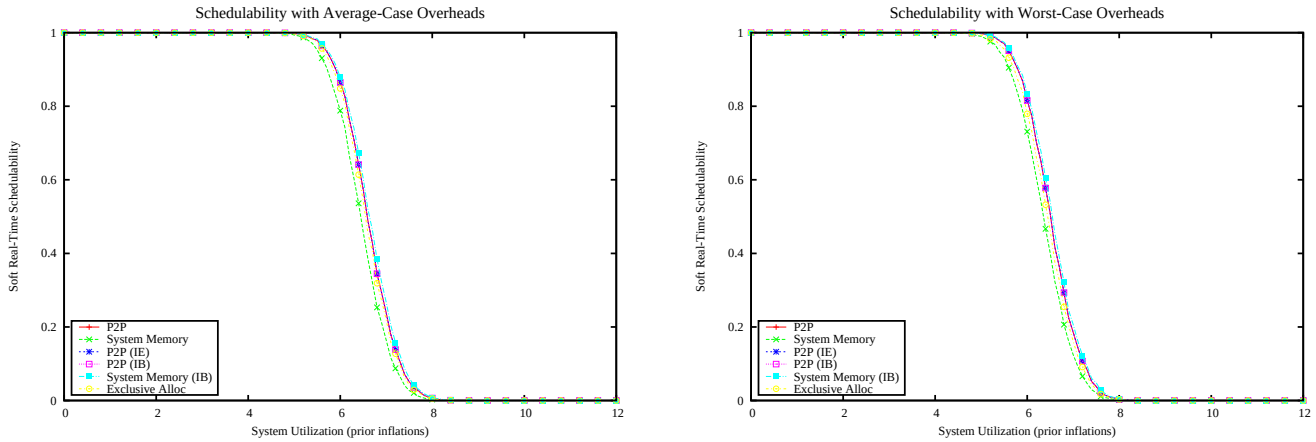

Figure 5684: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

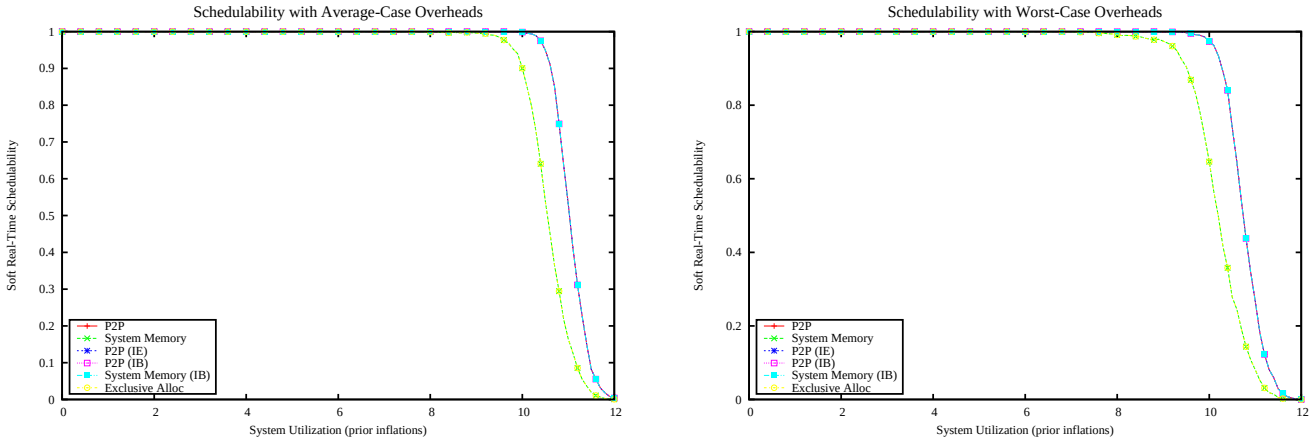

Figure 5685: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

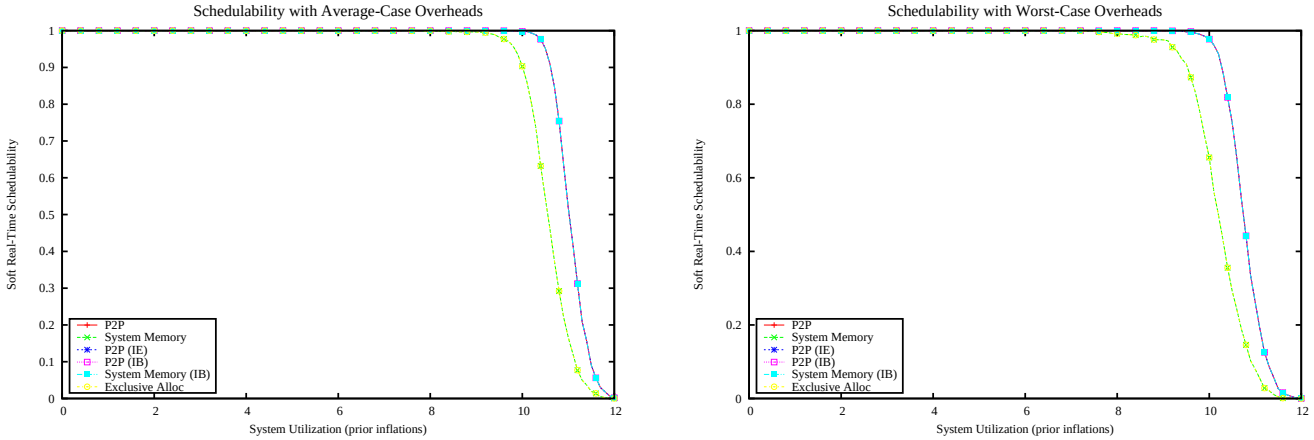

Figure 5686: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

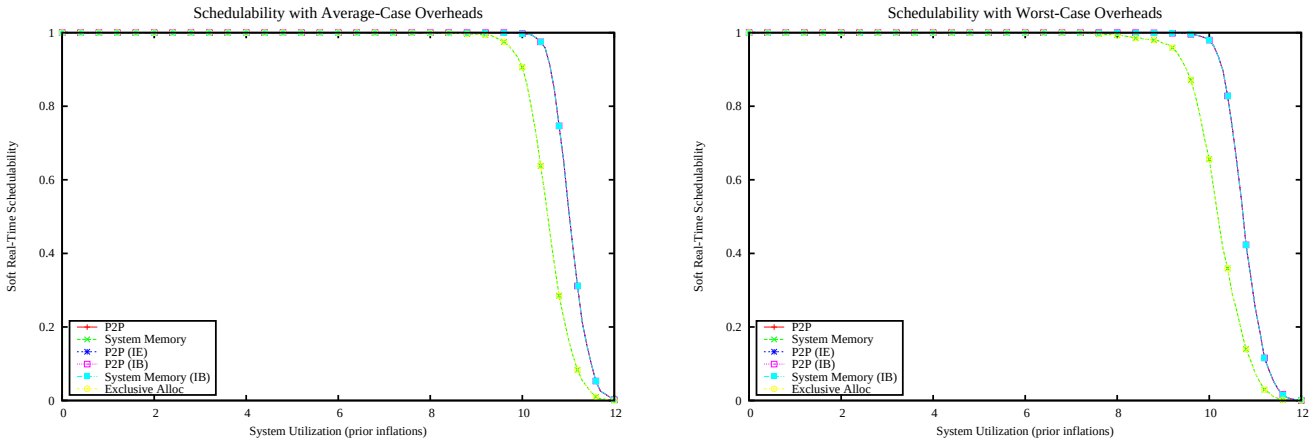

Figure 5687: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

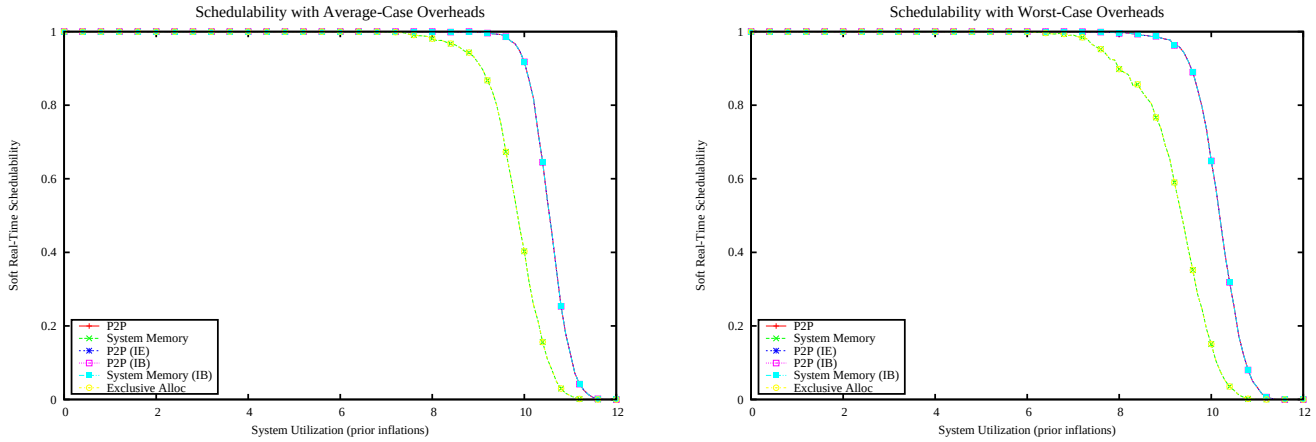

Figure 5688: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

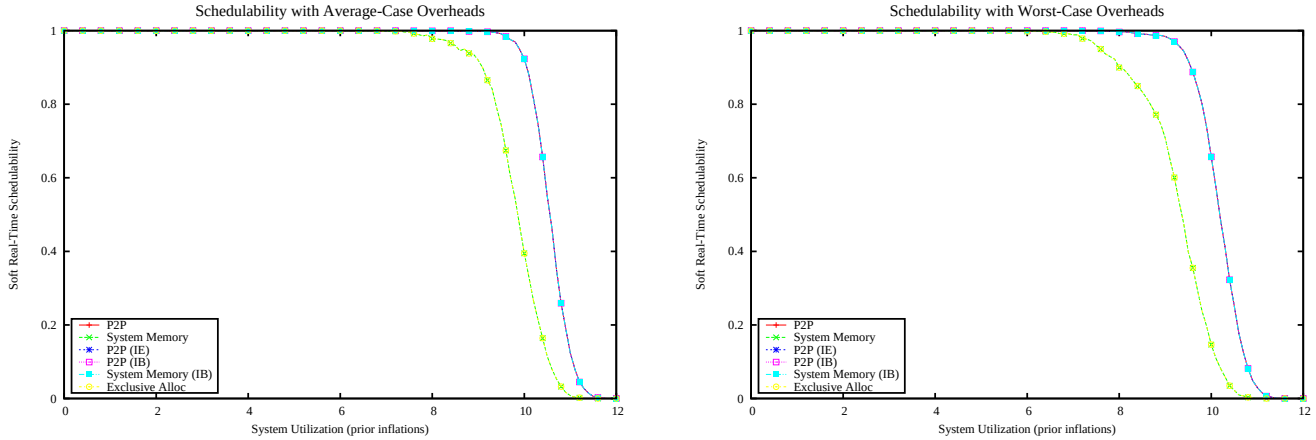

Figure 5689: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

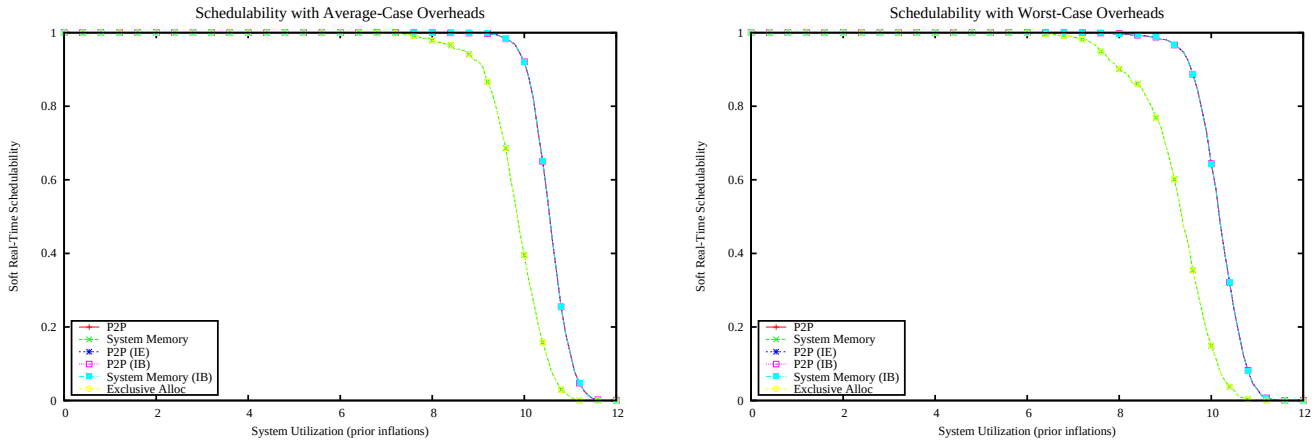

Figure 5690: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

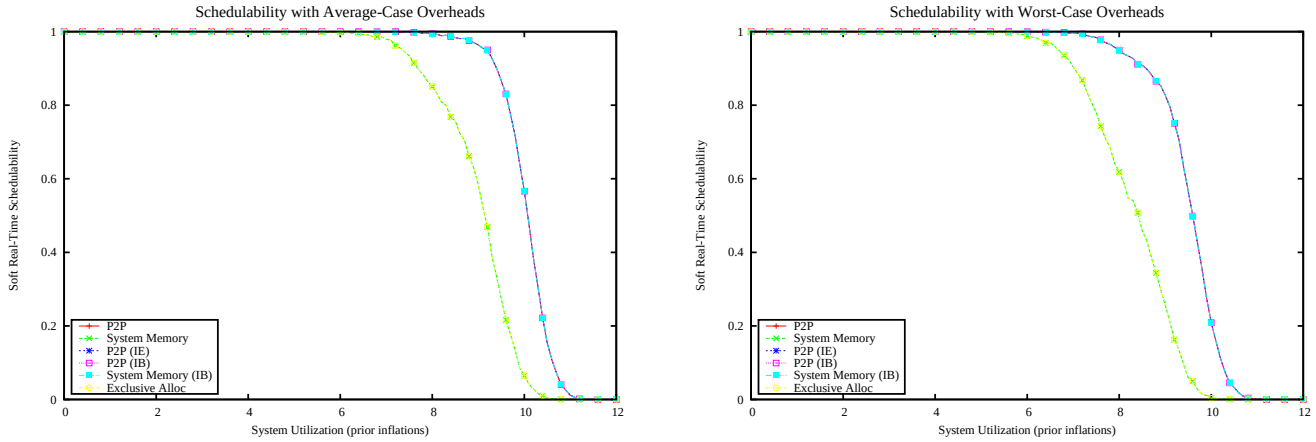

Figure 5691: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

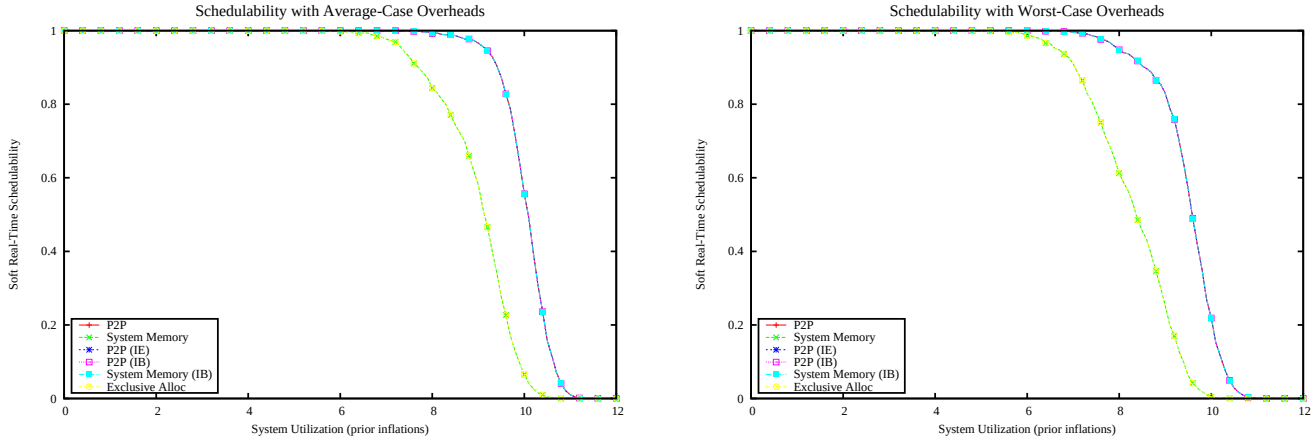

Figure 5692: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

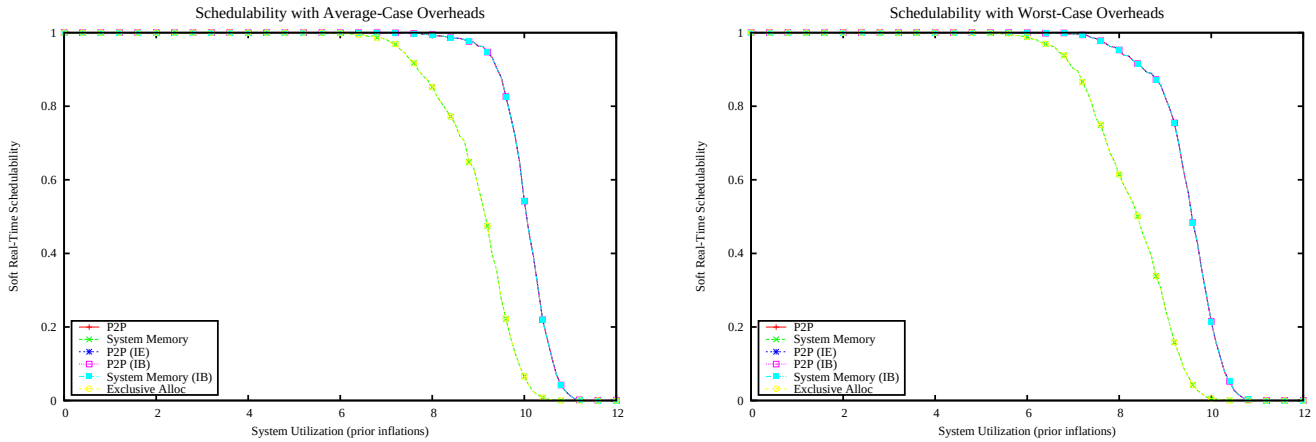

Figure 5693: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

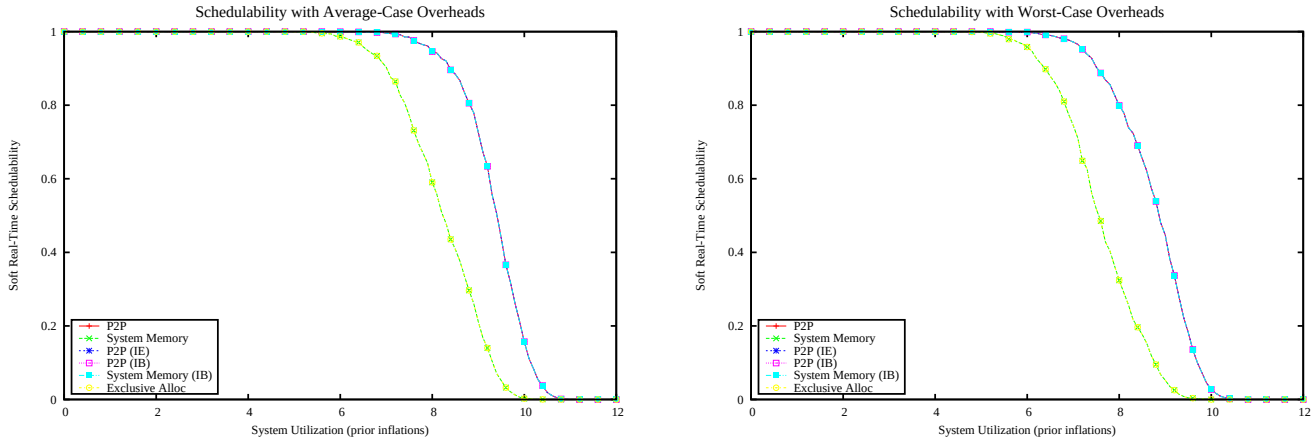

Figure 5694: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

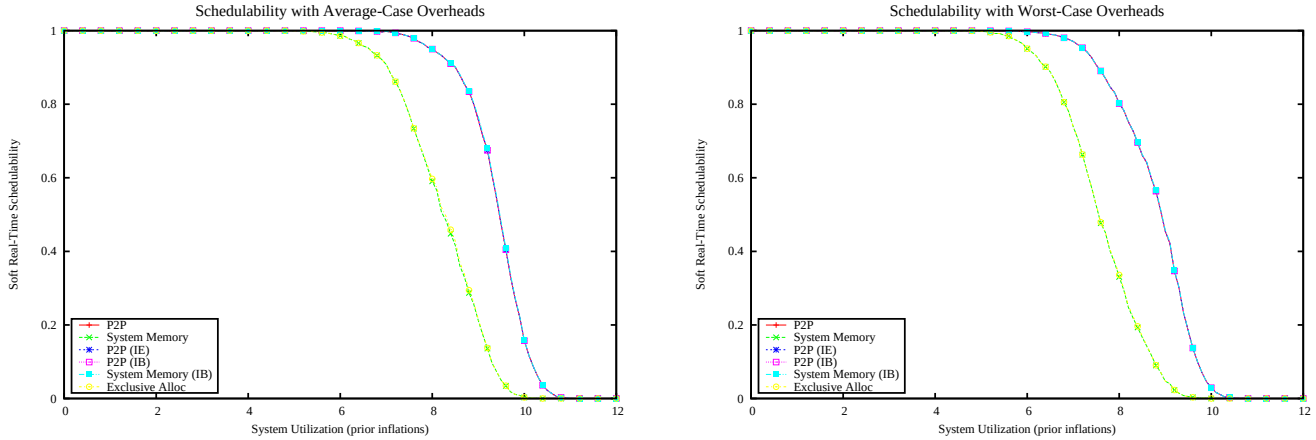

Figure 5695: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

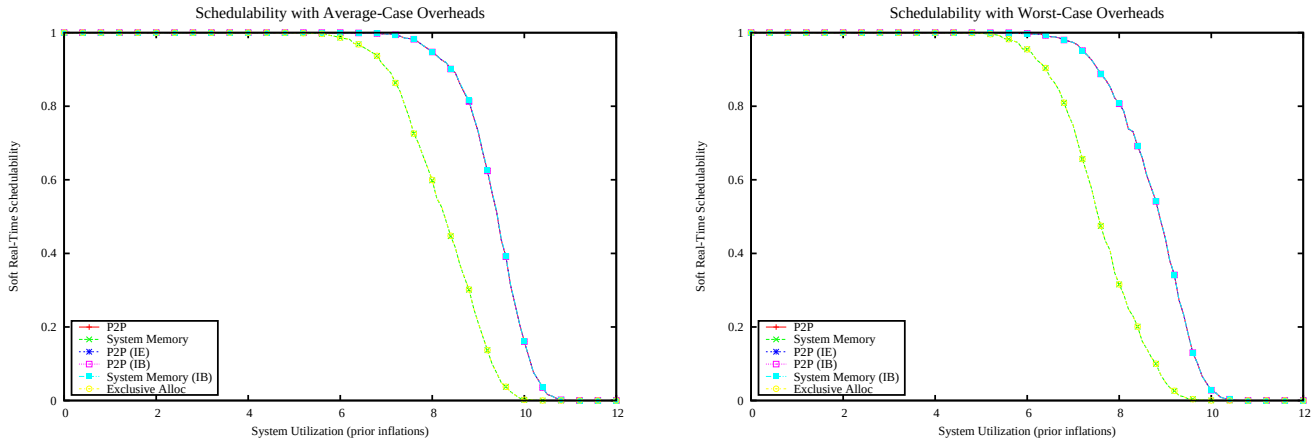

Figure 5696: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

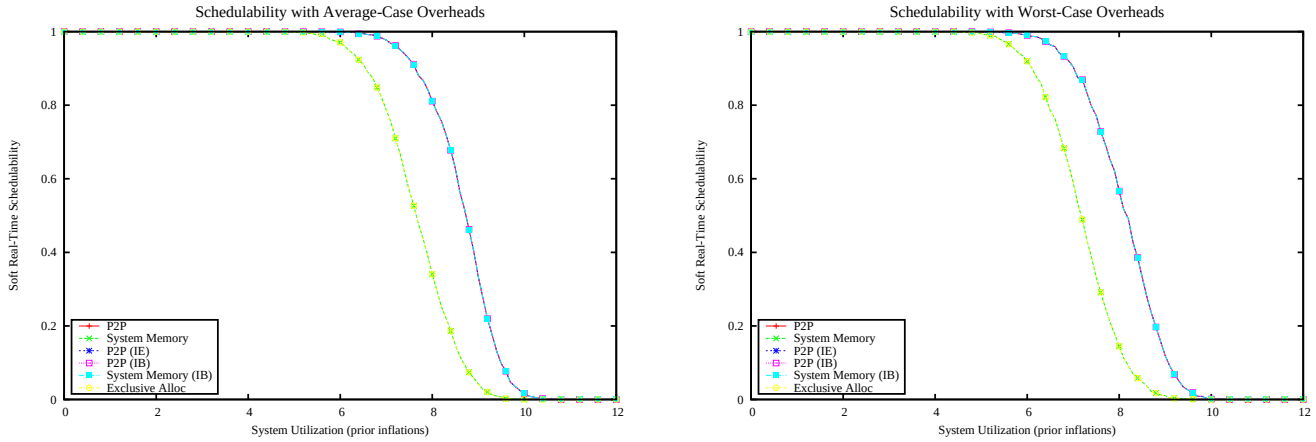

Figure 5697: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

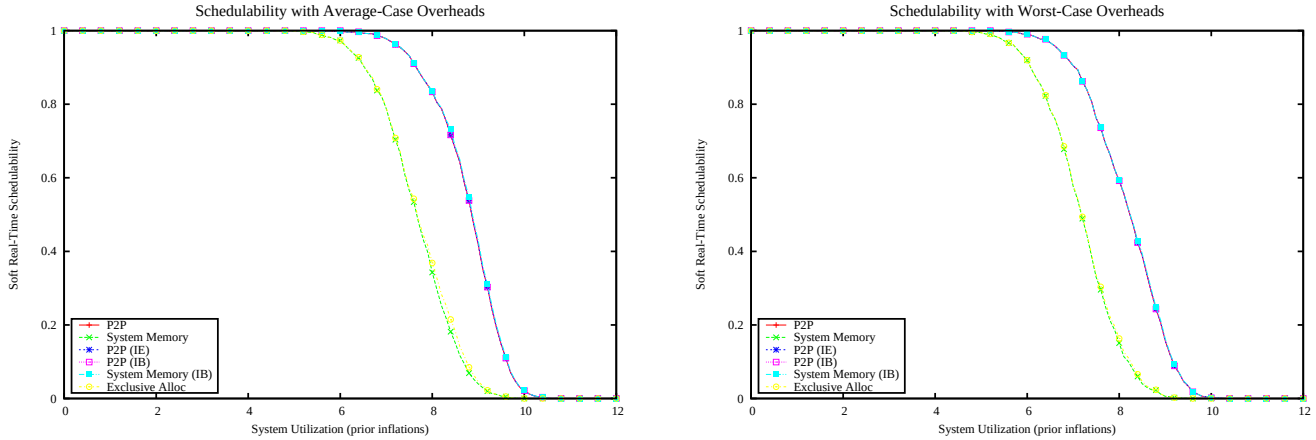

Figure 5698: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

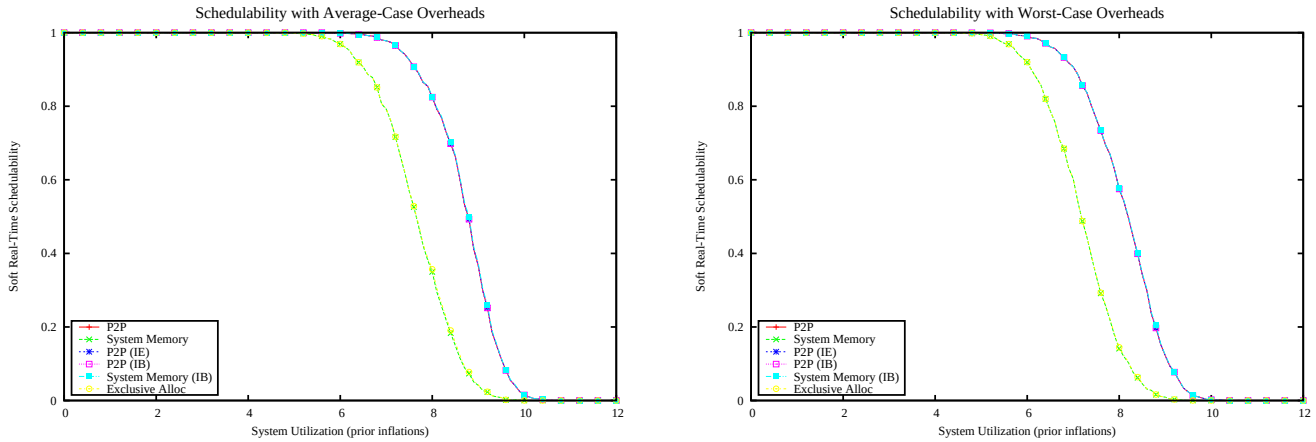

Figure 5699: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

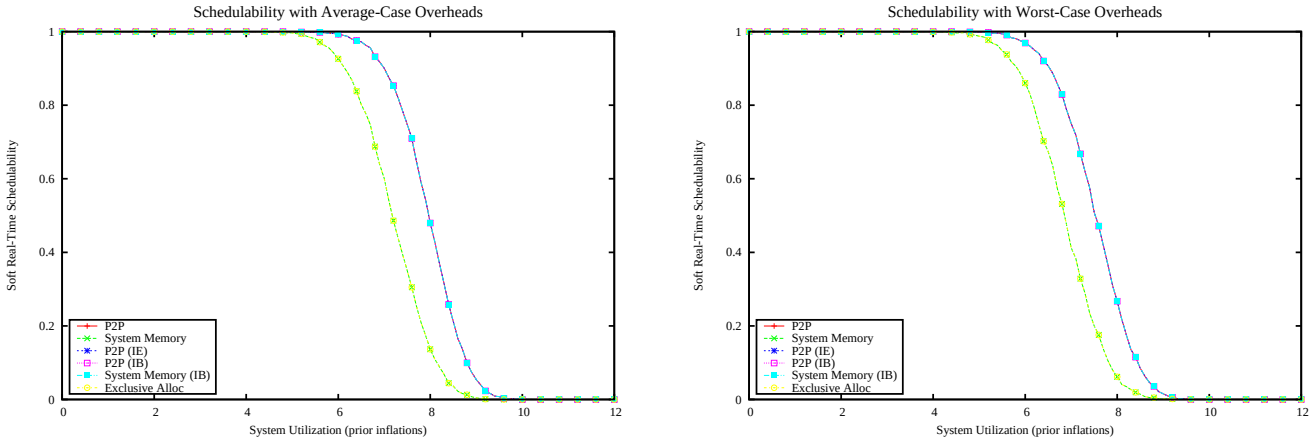

Figure 5700: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

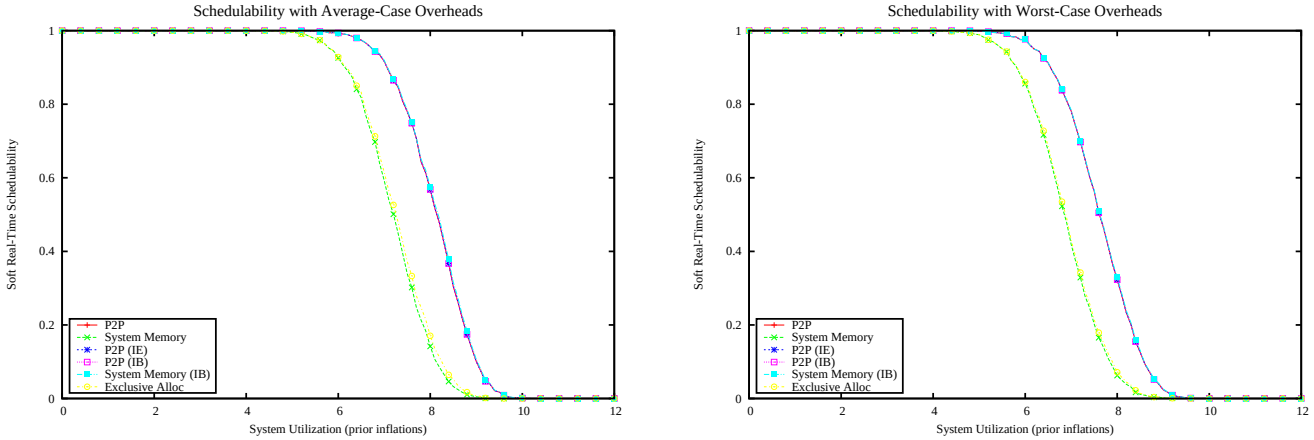

Figure 5701: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

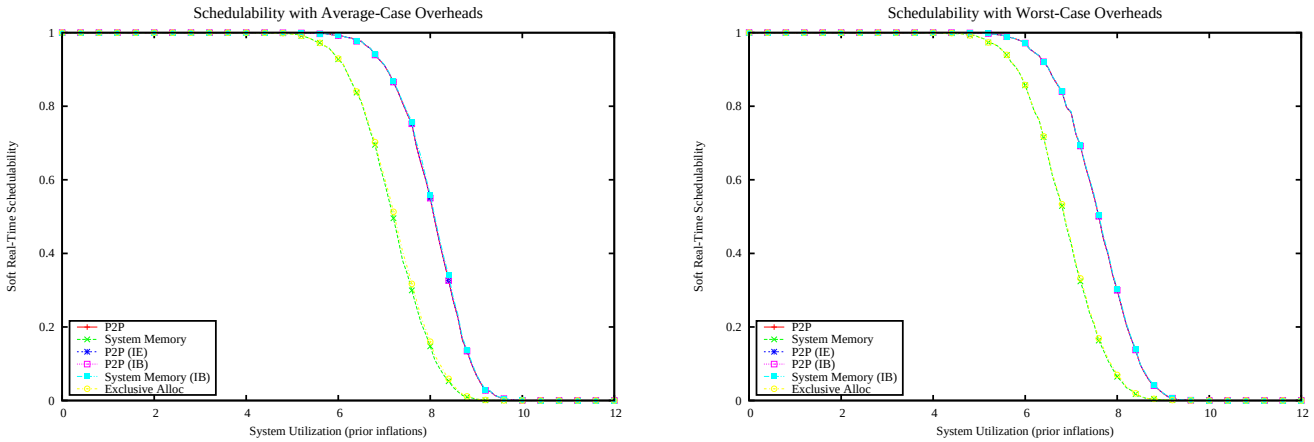

Figure 5702: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

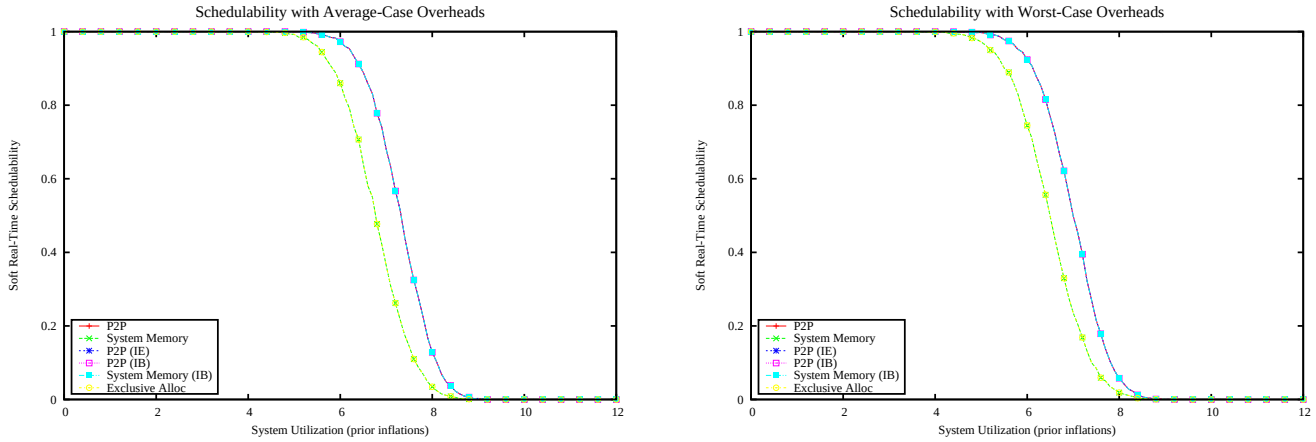

Figure 5703: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

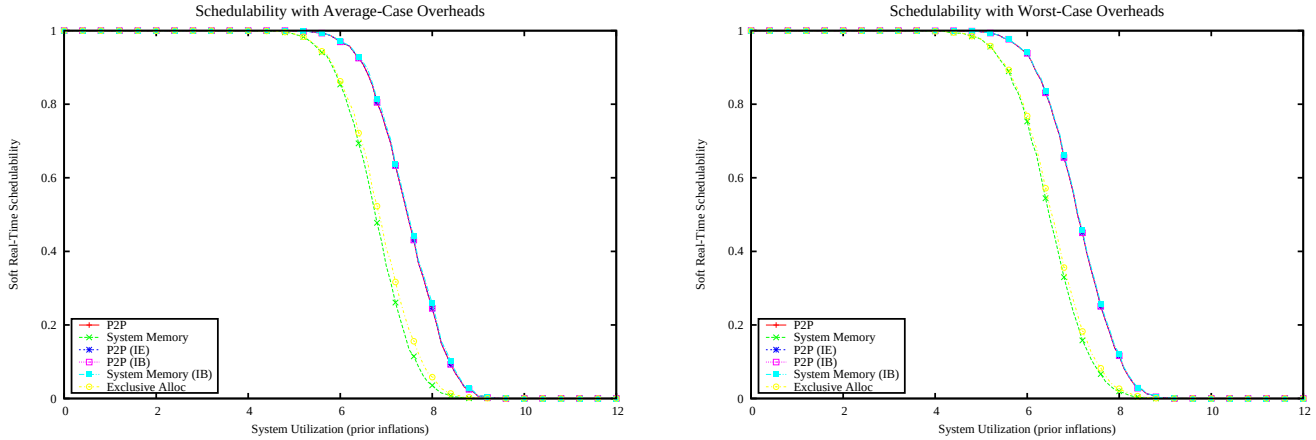

Figure 5704: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

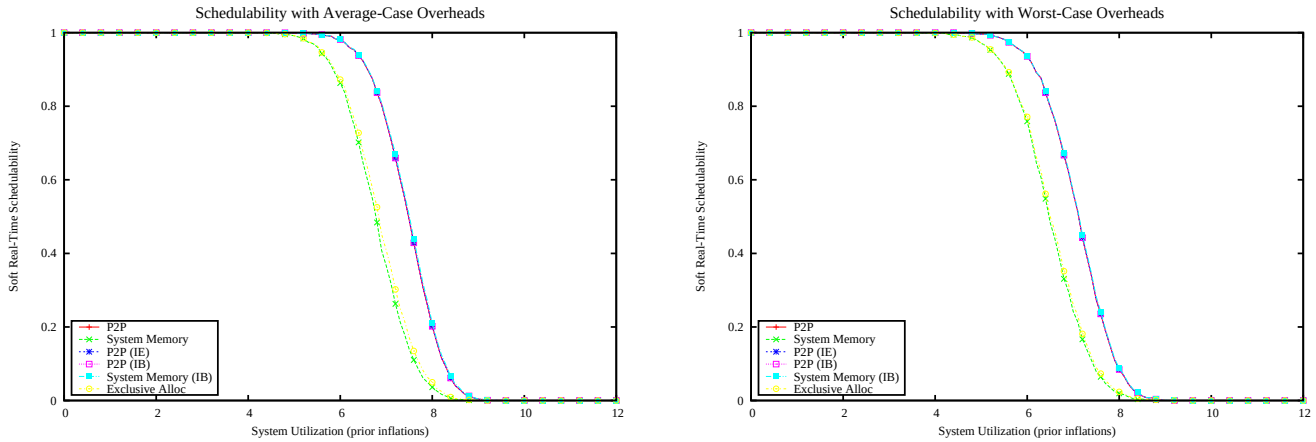

Figure 5705: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

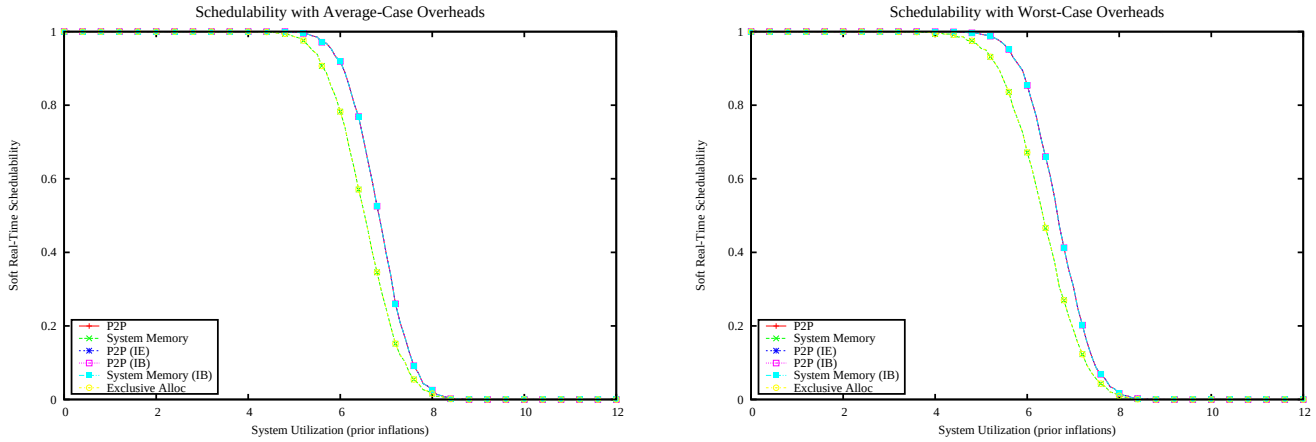

Figure 5706: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

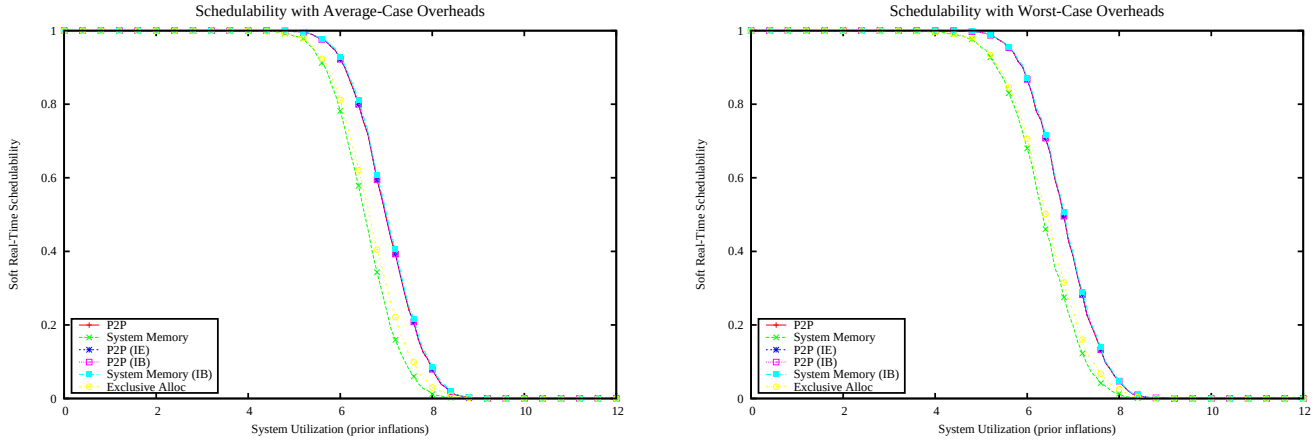

Figure 5707: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

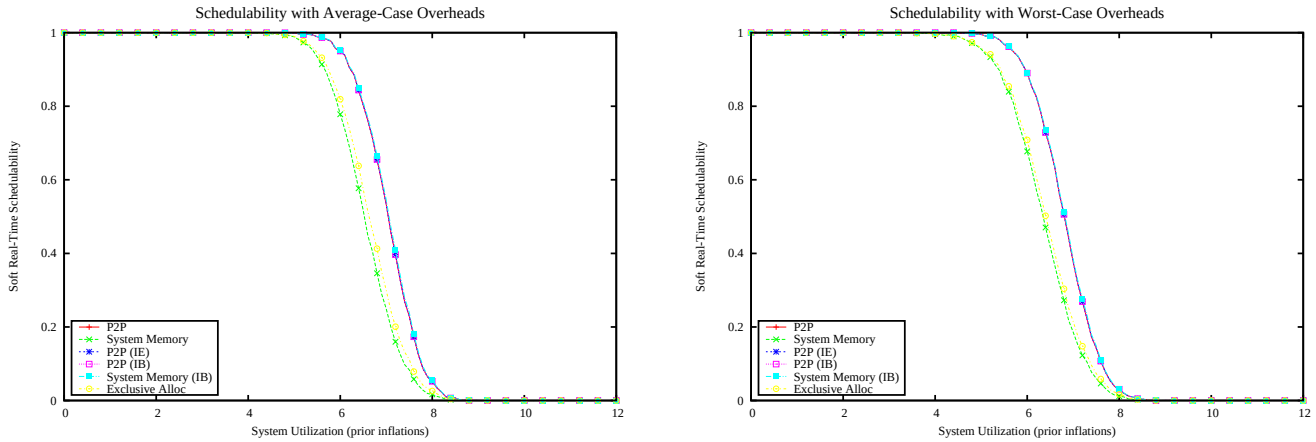

Figure 5708: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

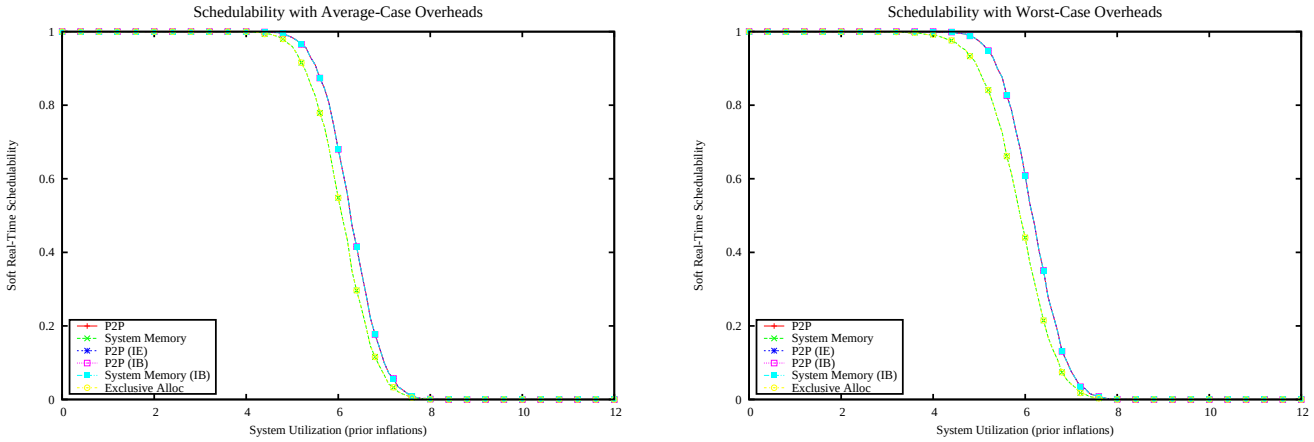

Figure 5709: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

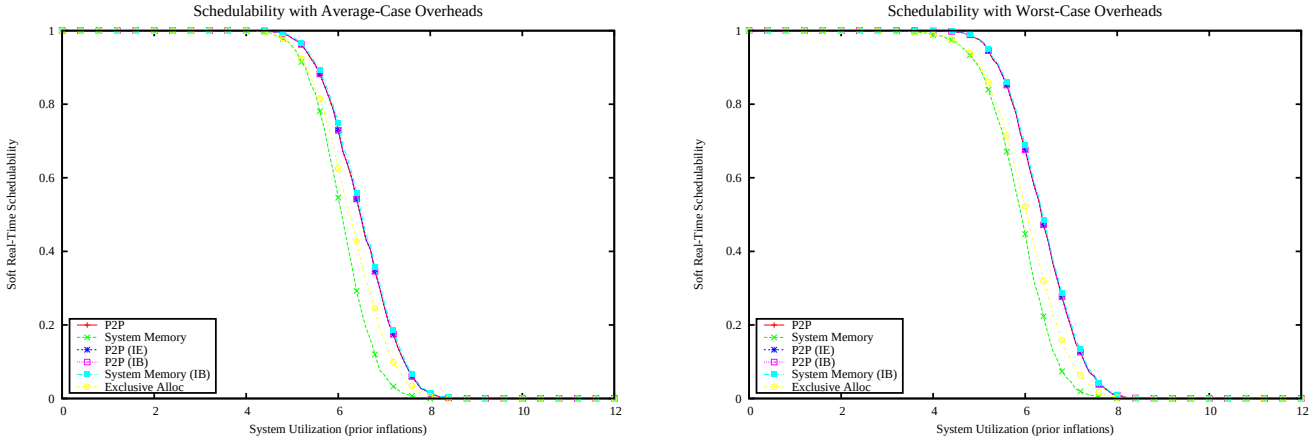

Figure 5710: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

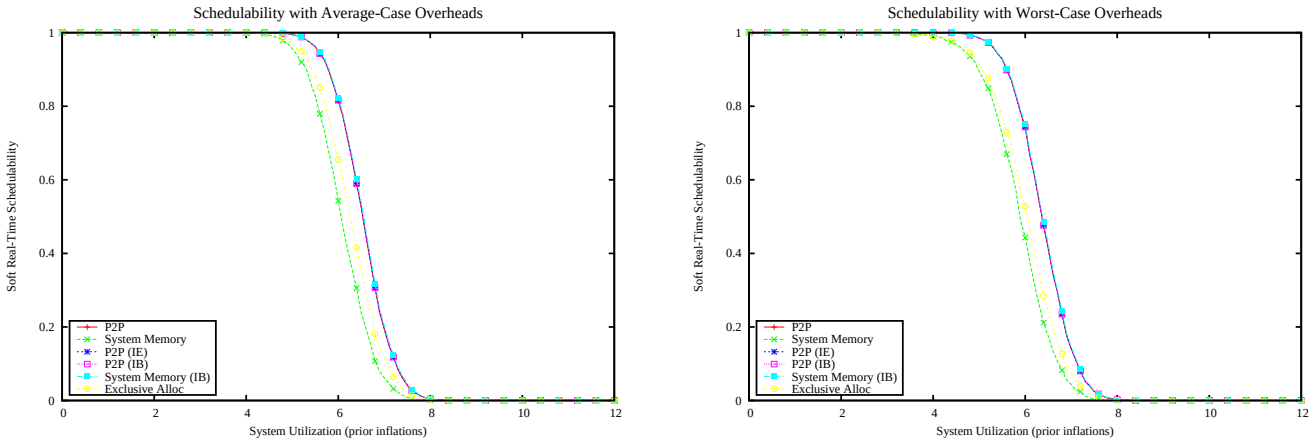

Figure 5711: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

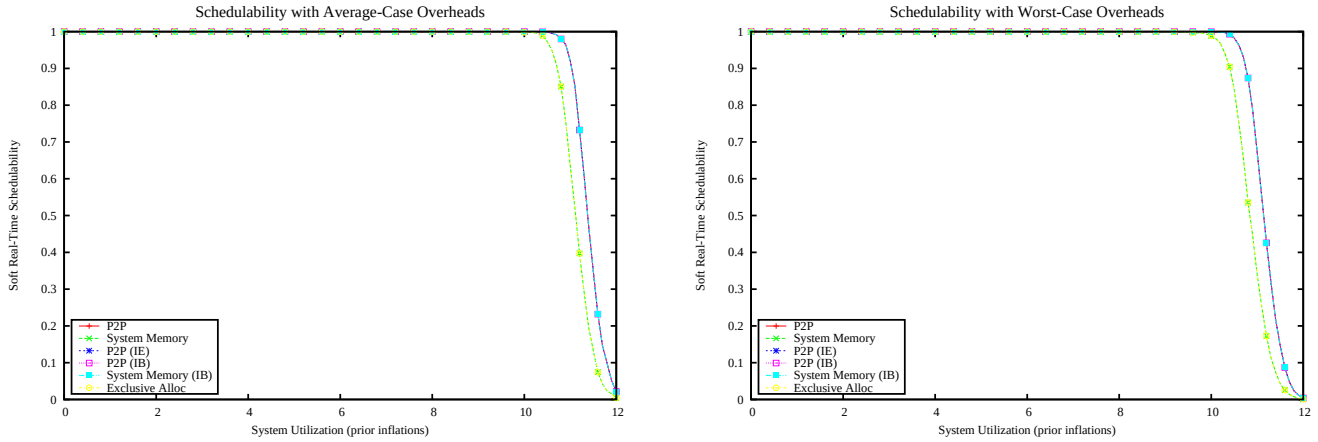

Figure 5712: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

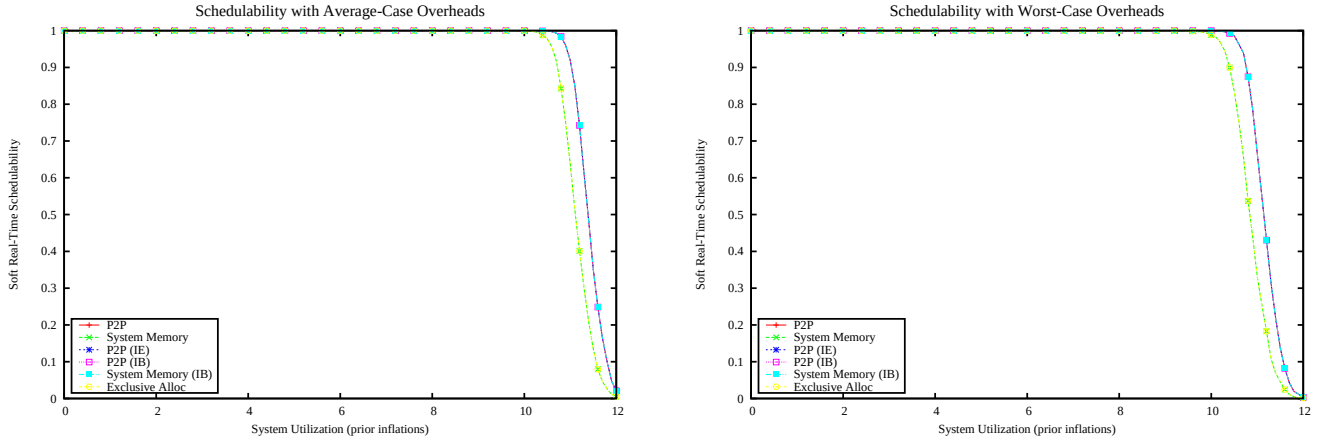

Figure 5713: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

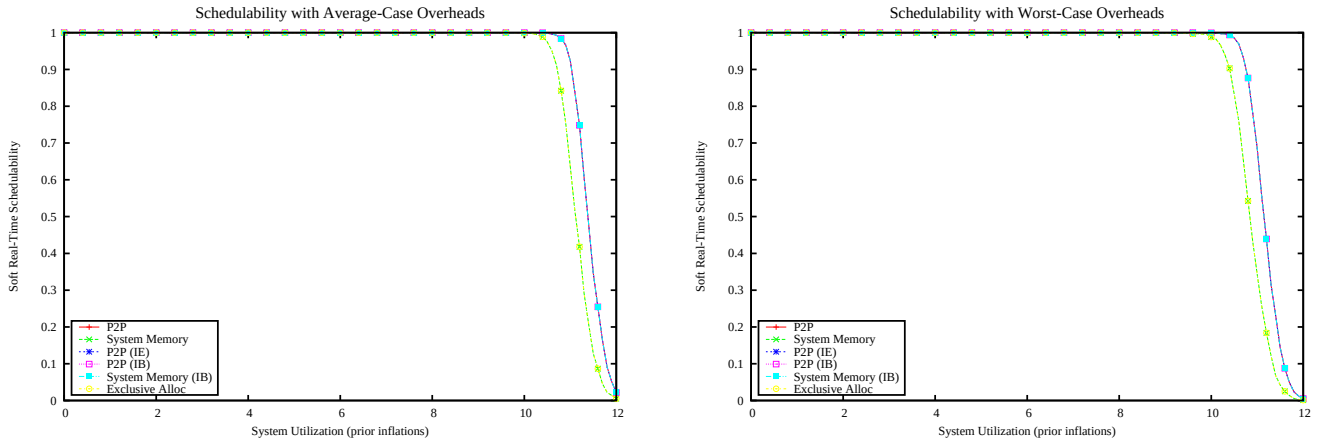

Figure 5714: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

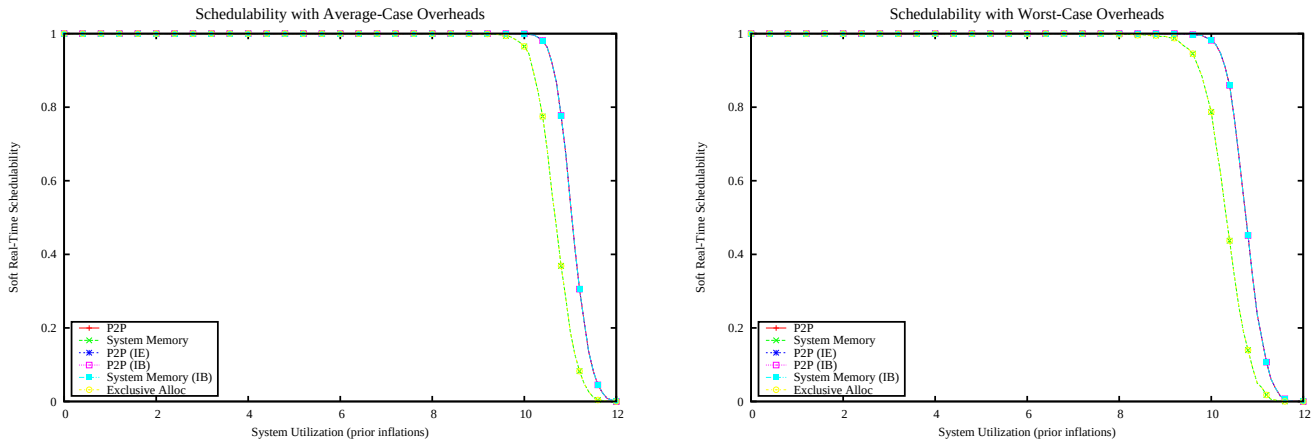

Figure 5715: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

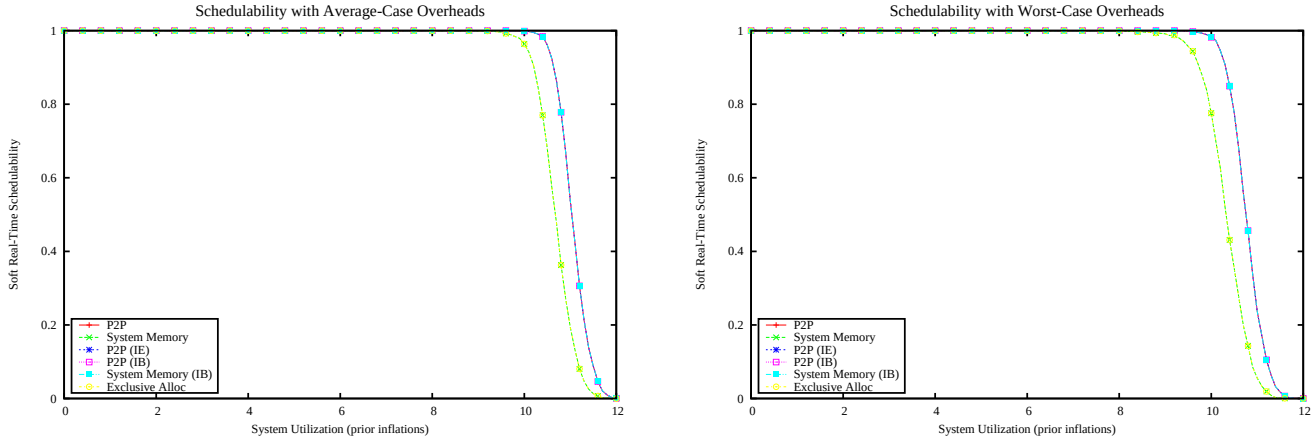

Figure 5716: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

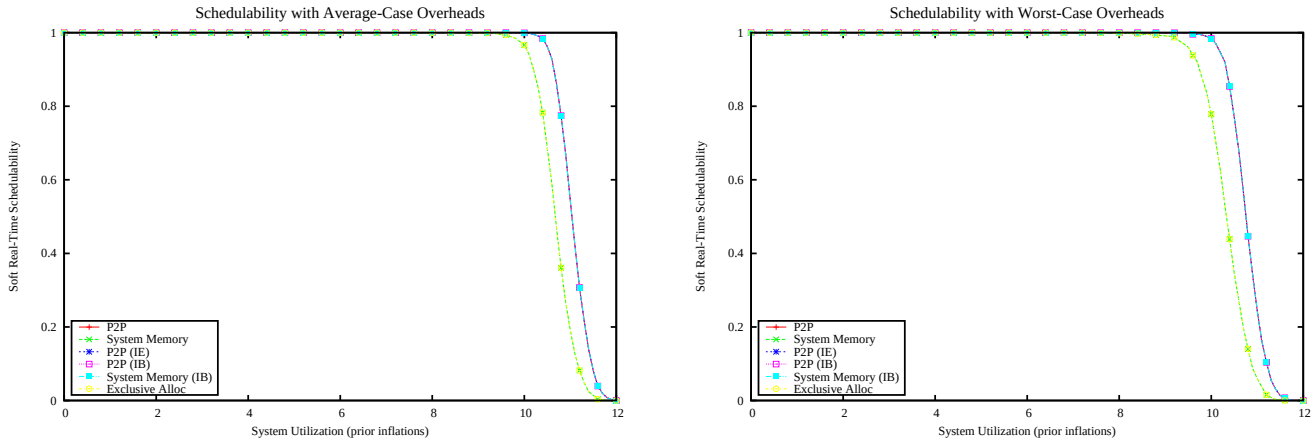

Figure 5717: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

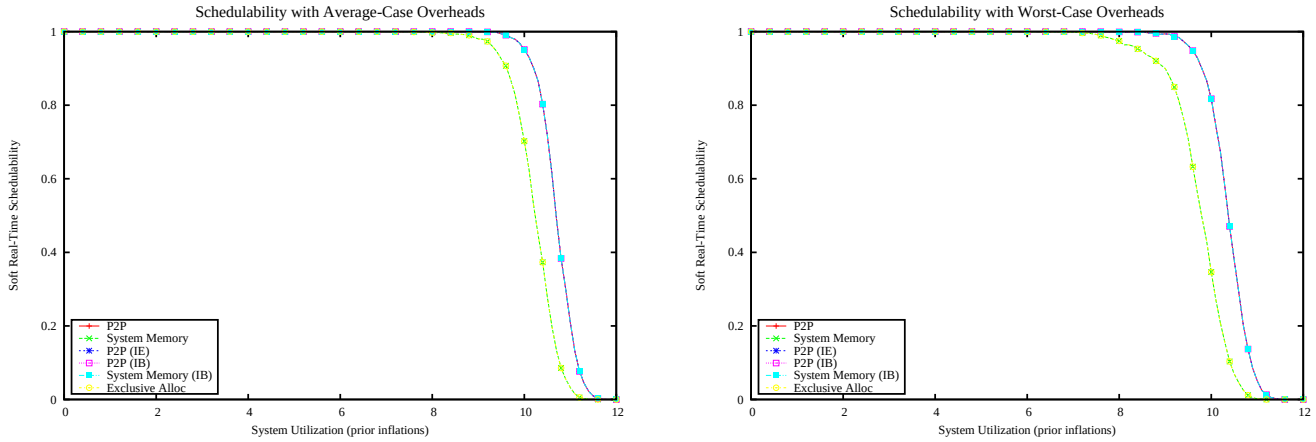

Figure 5718: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

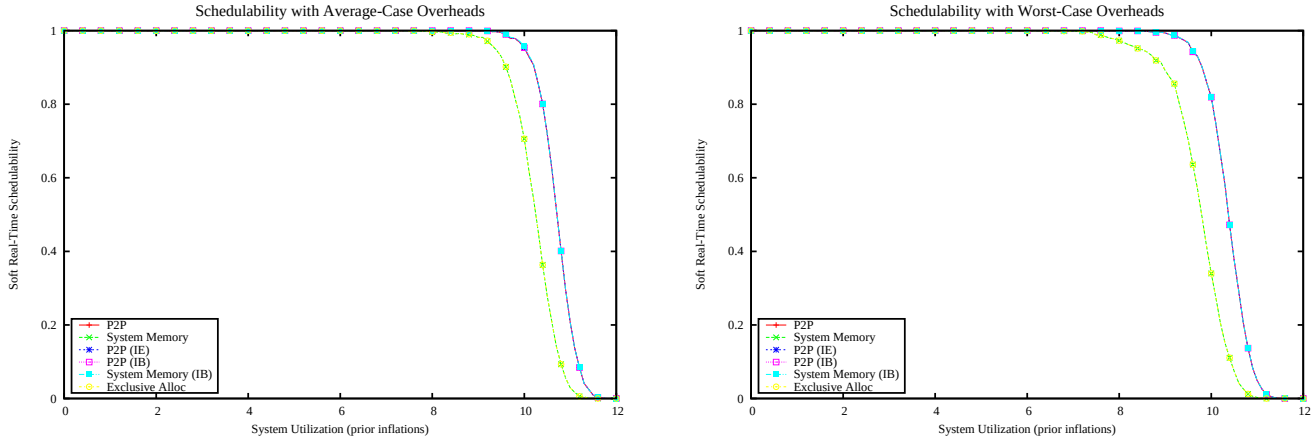

Figure 5719: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

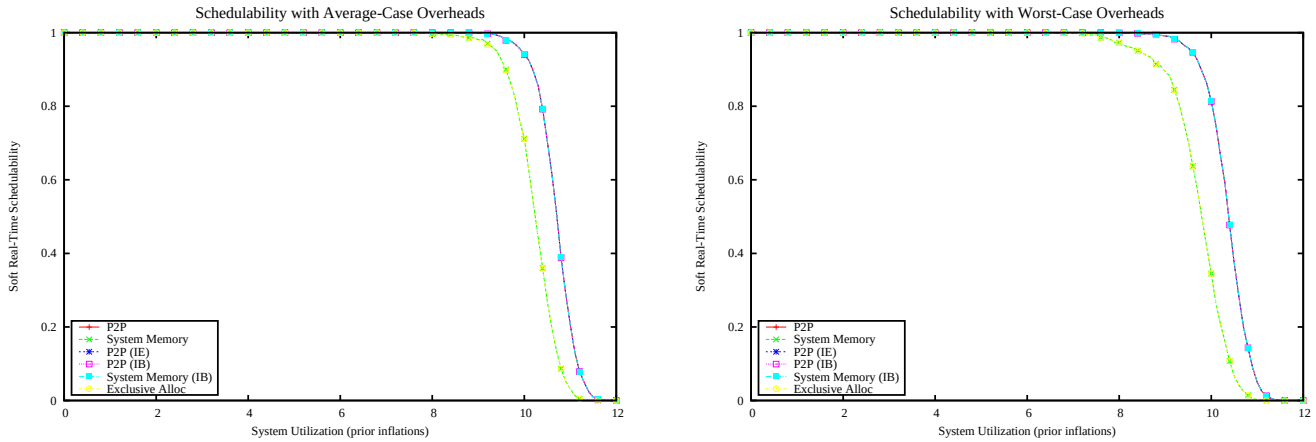

Figure 5720: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

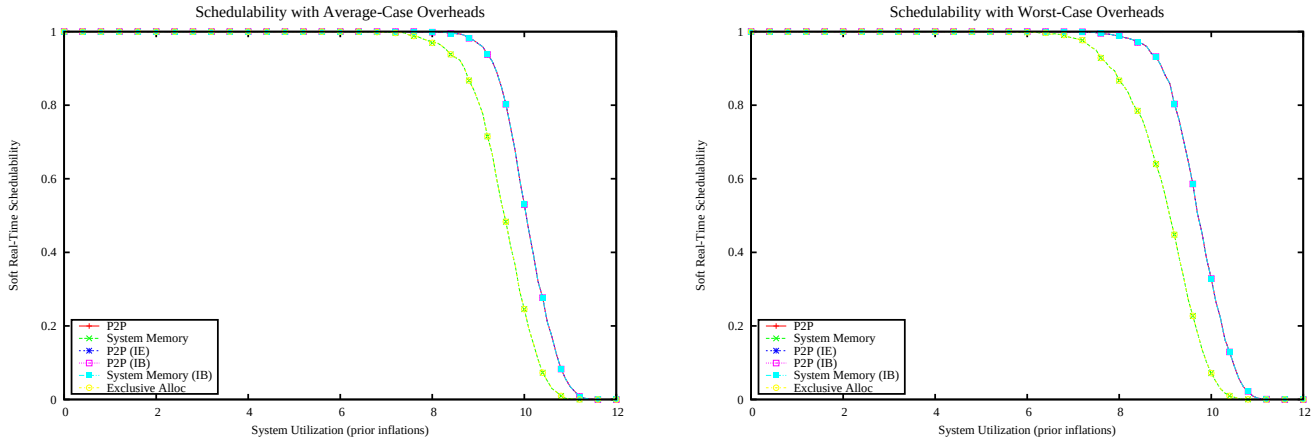

Figure 5721: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

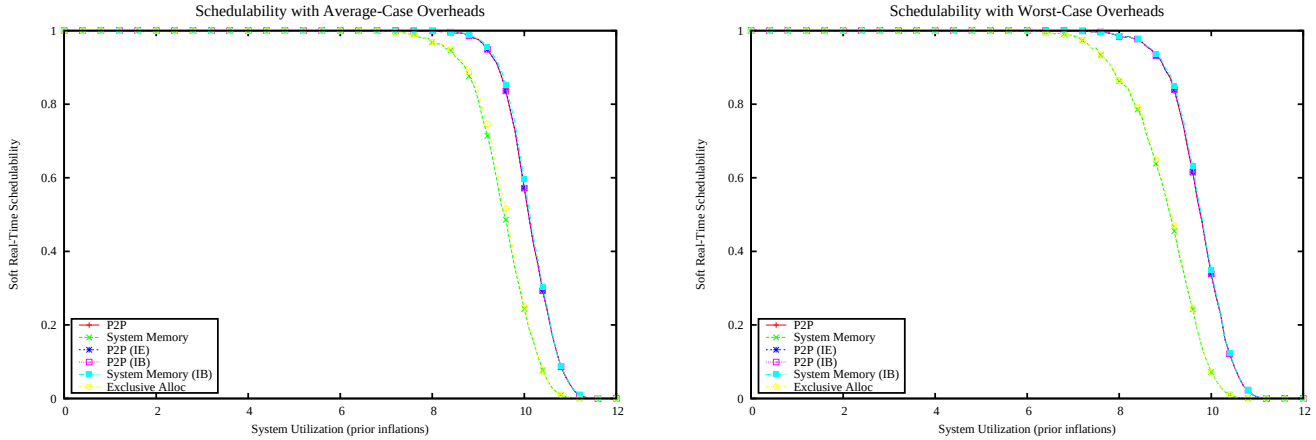

Figure 5722: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

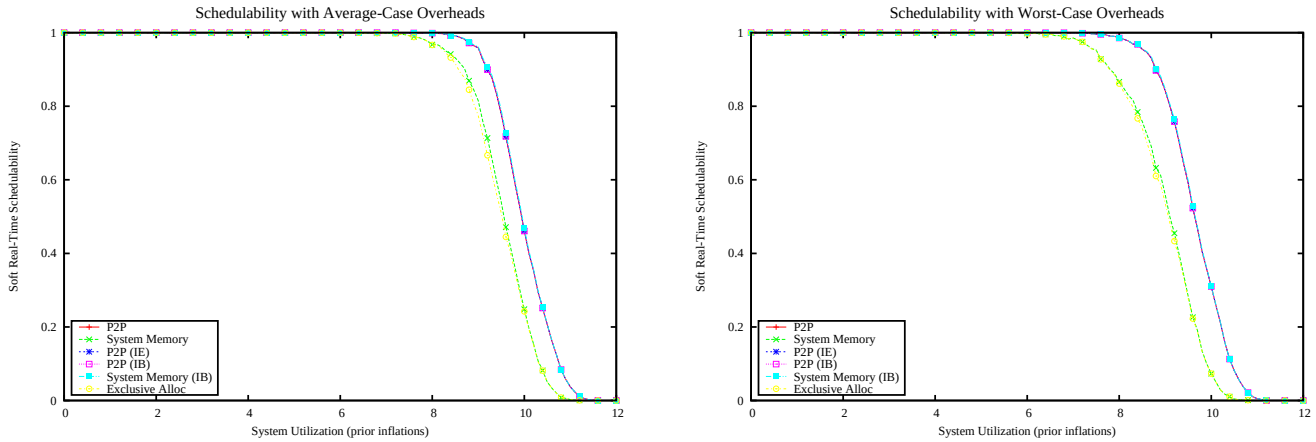

Figure 5723: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

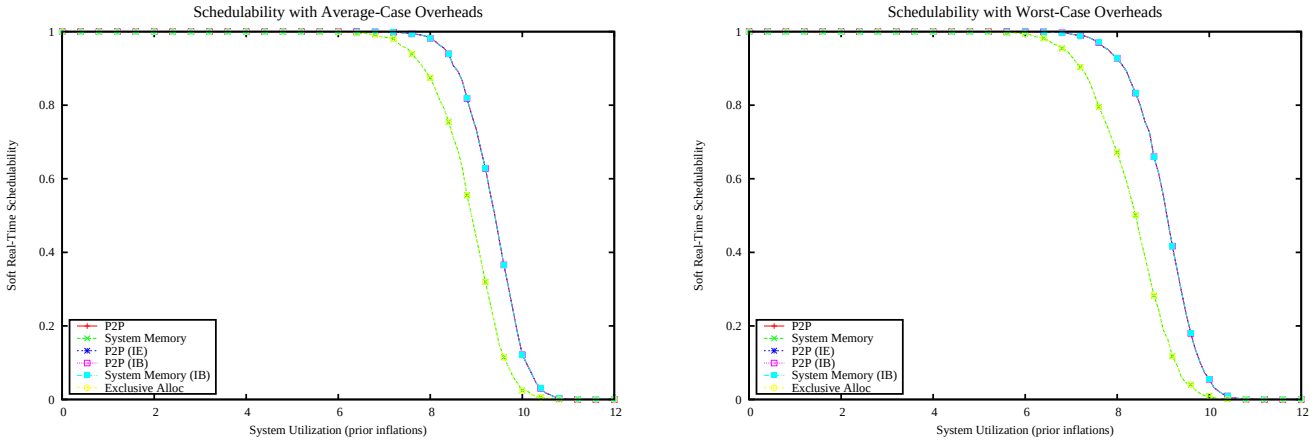

Figure 5724: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

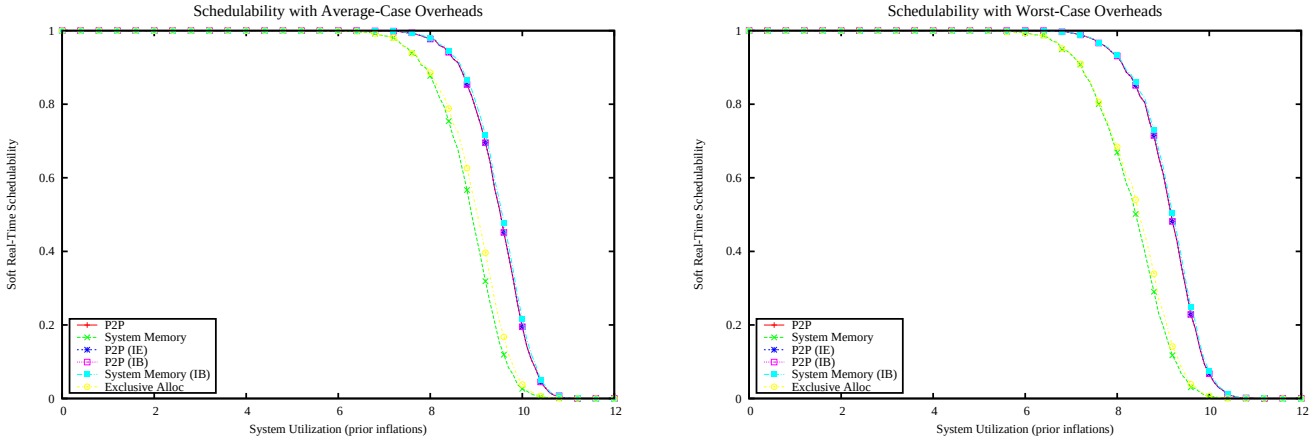

Figure 5725: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

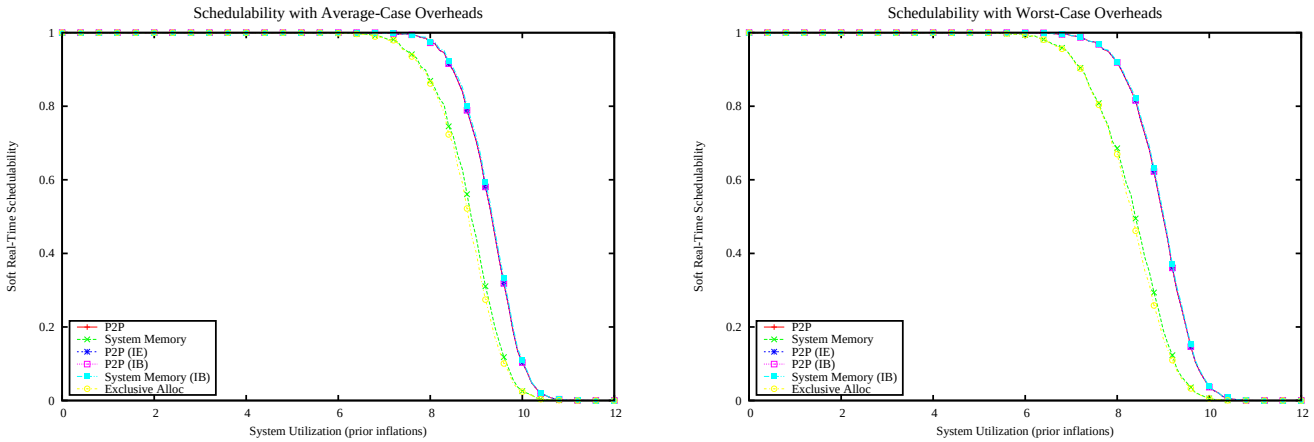

Figure 5726: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

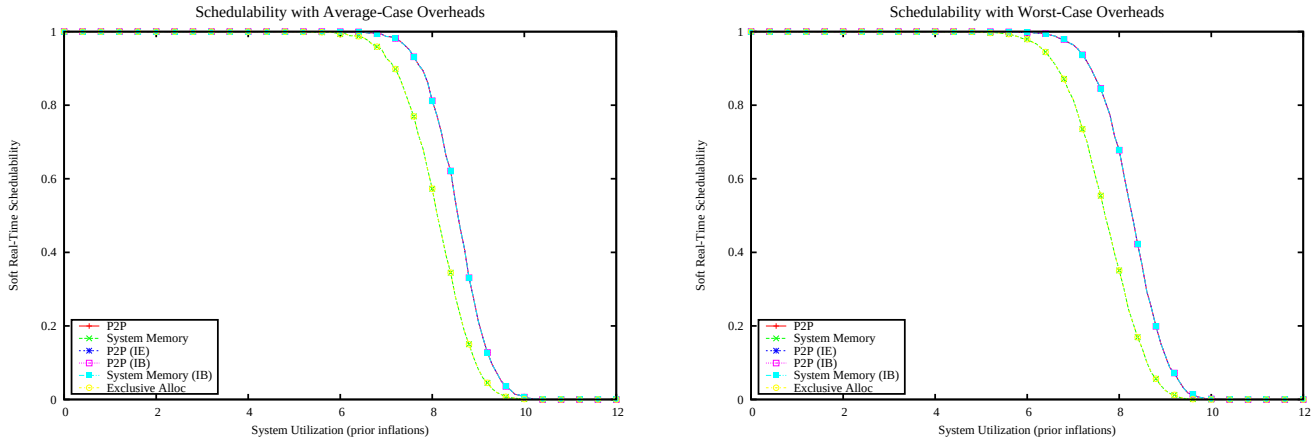

Figure 5727: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

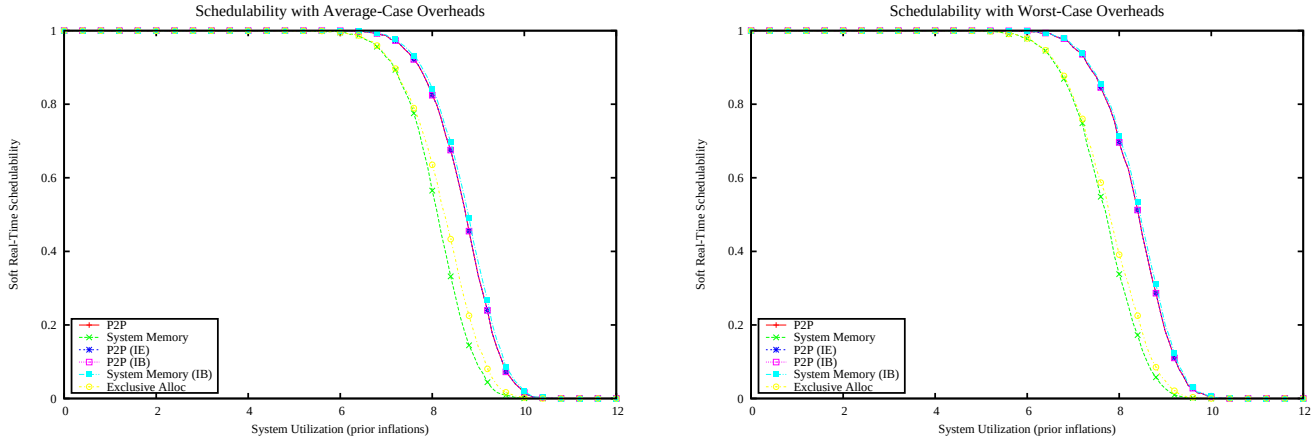

Figure 5728: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

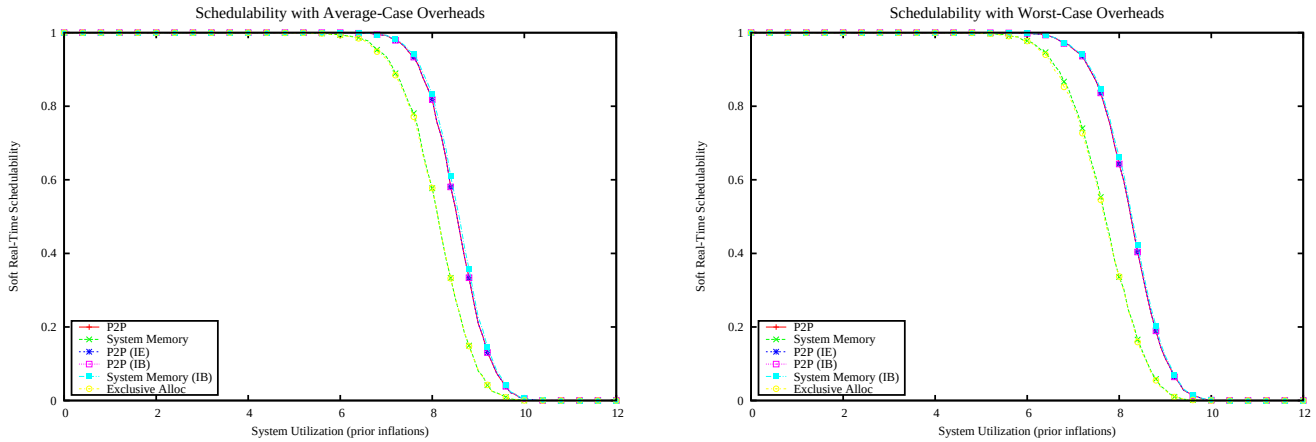

Figure 5729: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

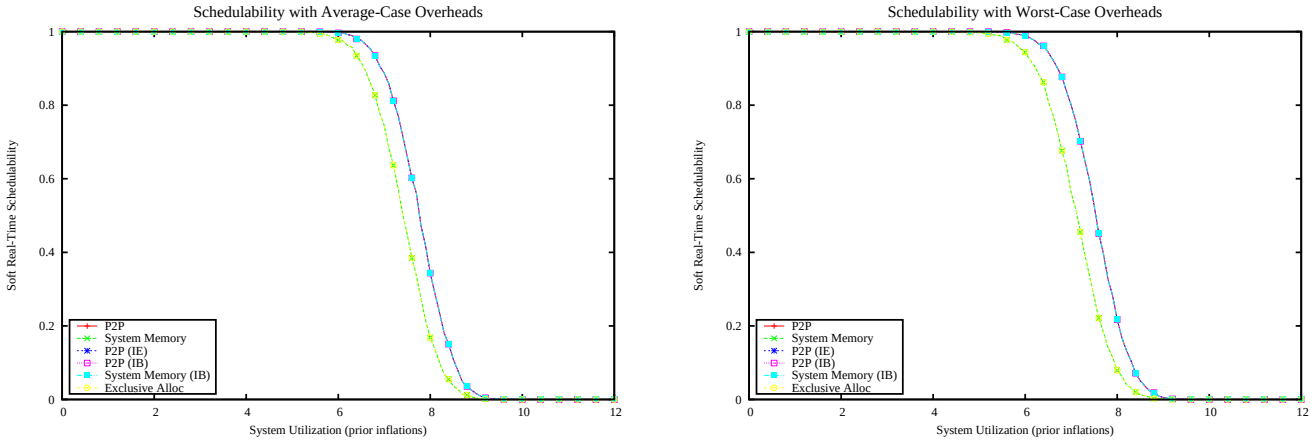

Figure 5730: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

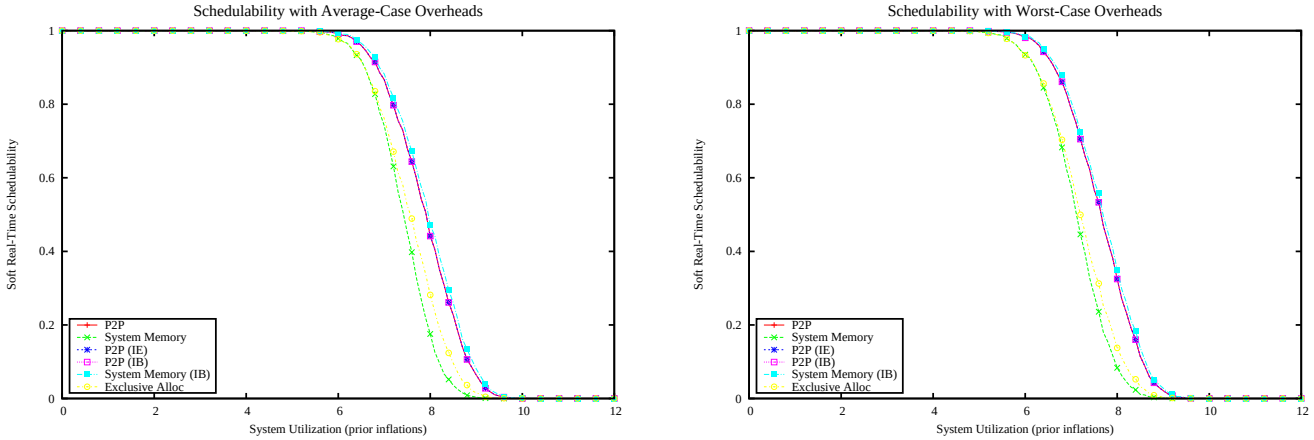

Figure 5731: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

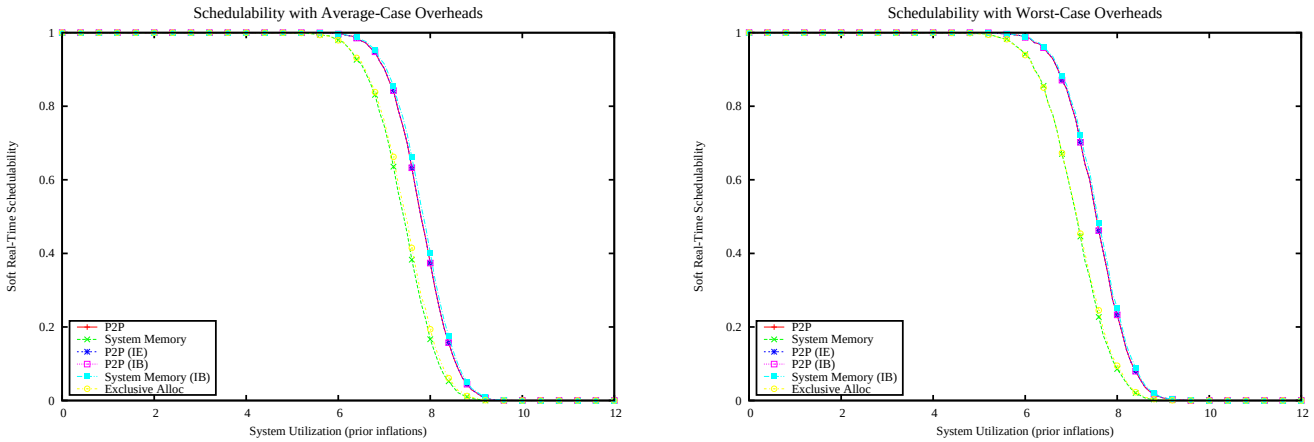

Figure 5732: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

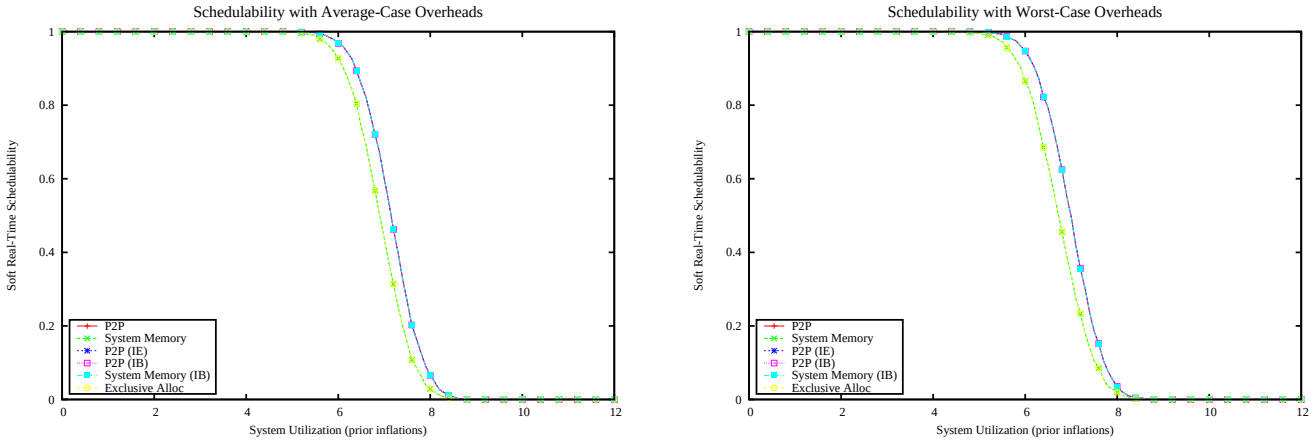

Figure 5733: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

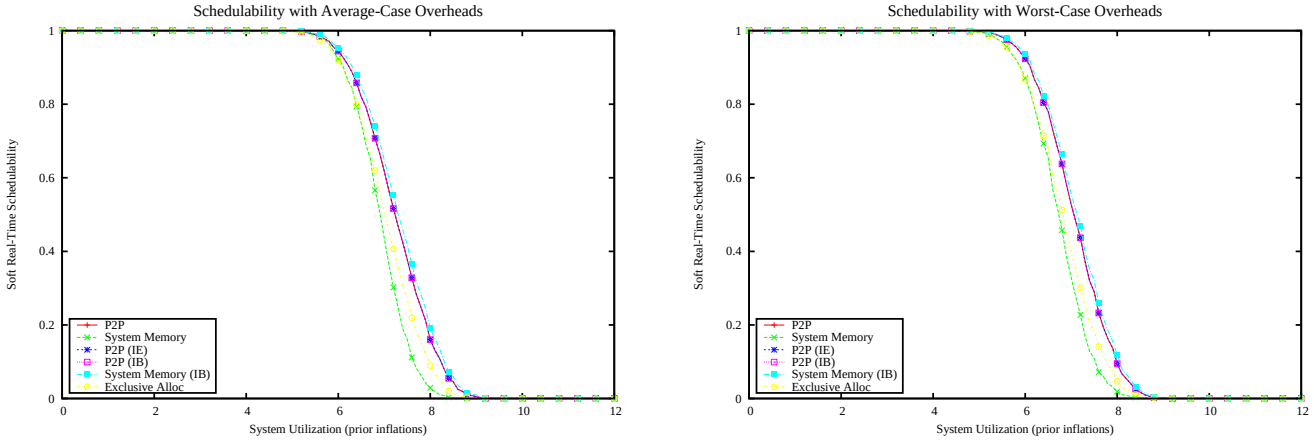

Figure 5734: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

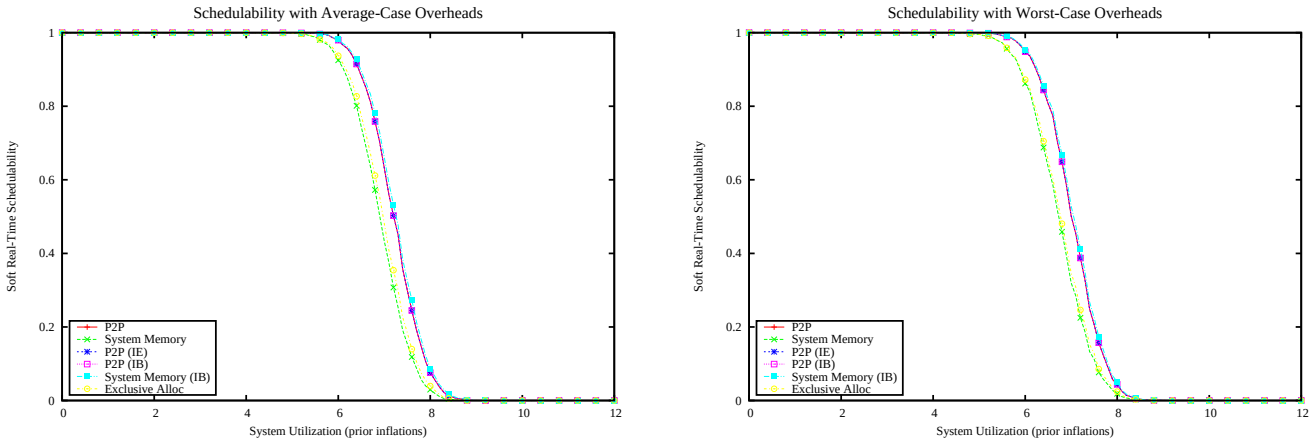

Figure 5735: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

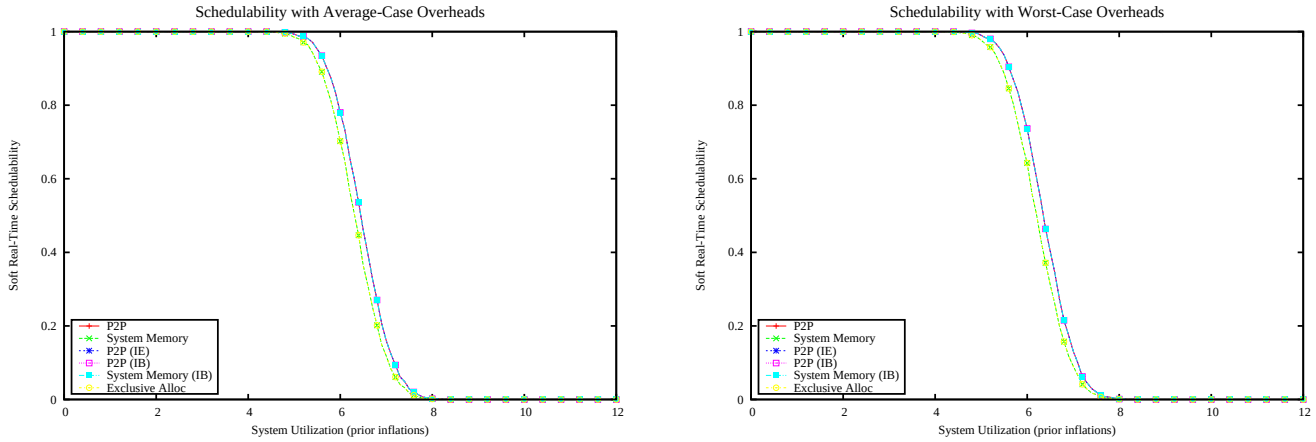

Figure 5736: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

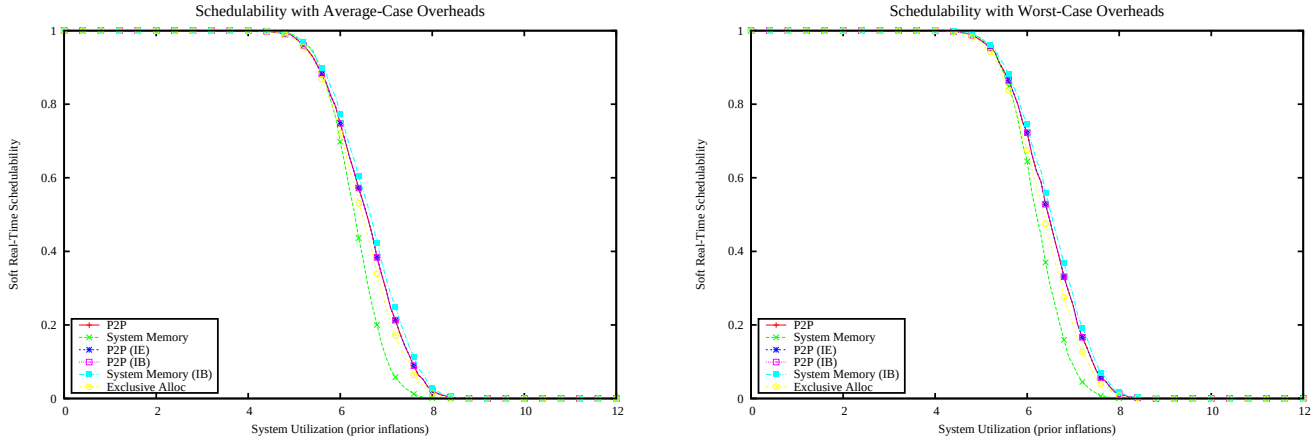

Figure 5737: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

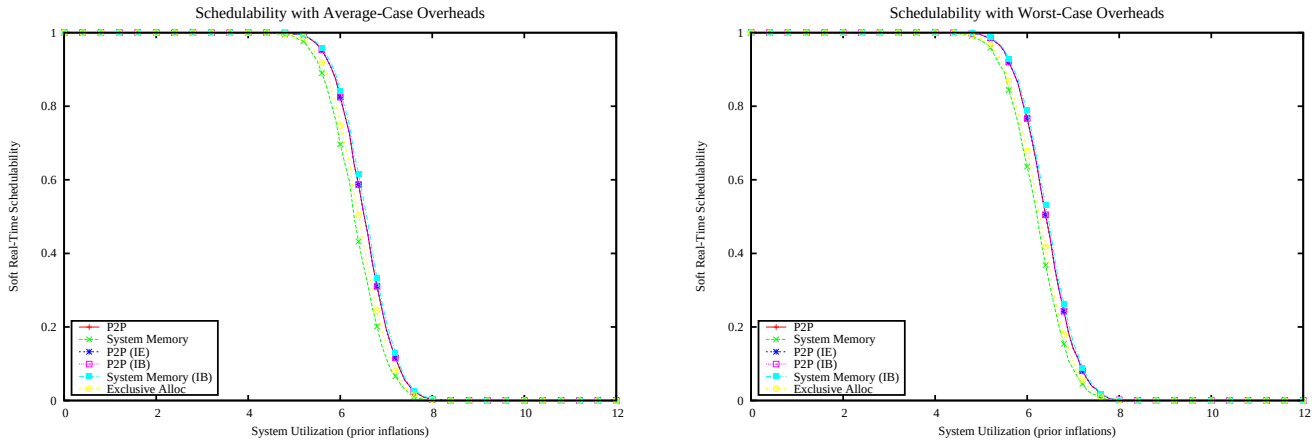

Figure 5738: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

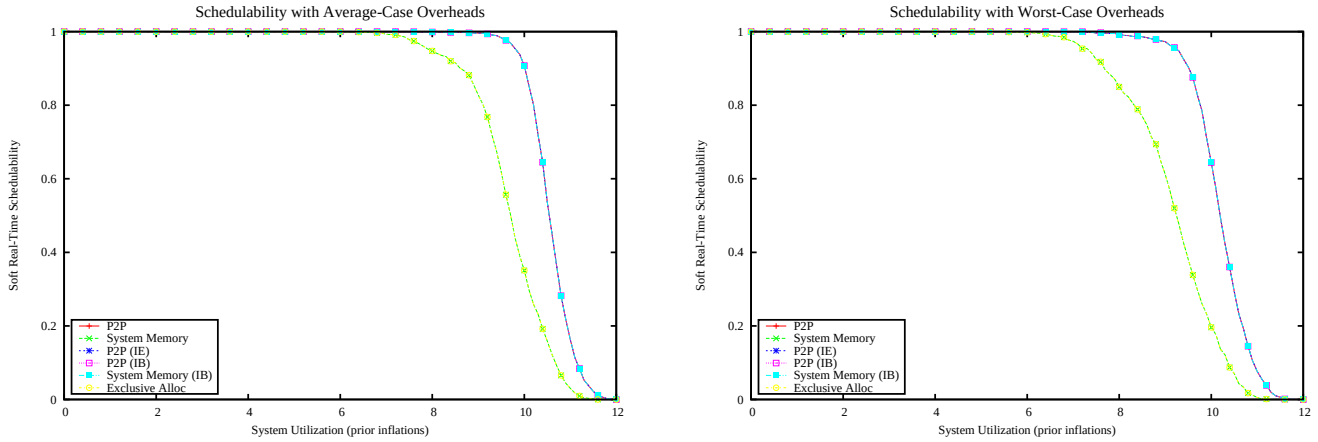

Figure 5739: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

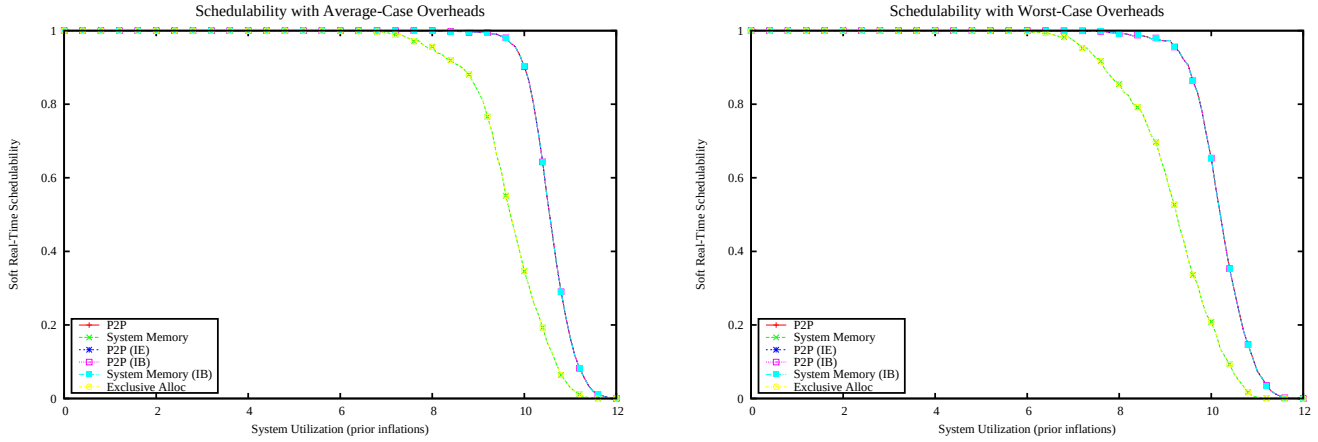

Figure 5740: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

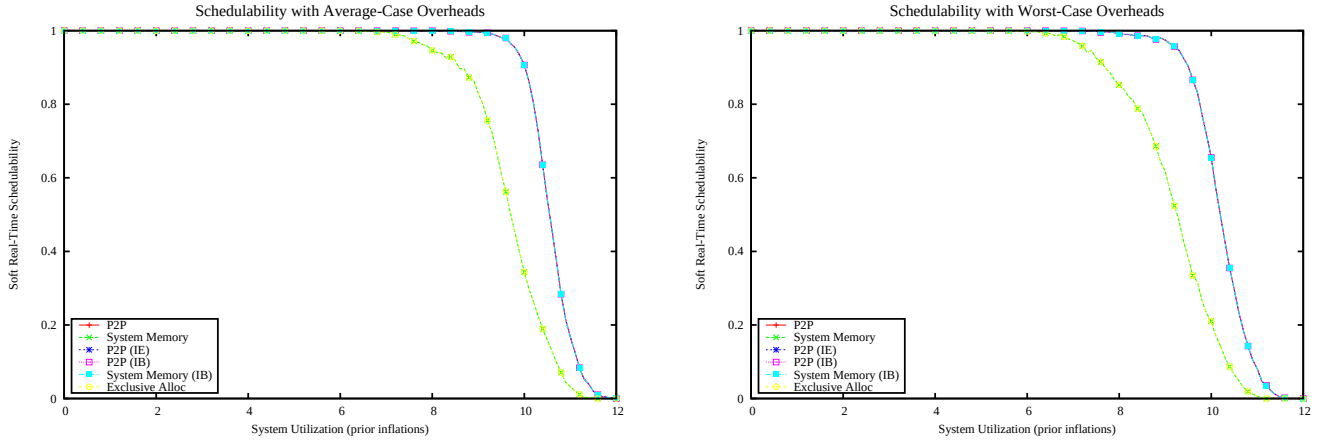

Figure 5741: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

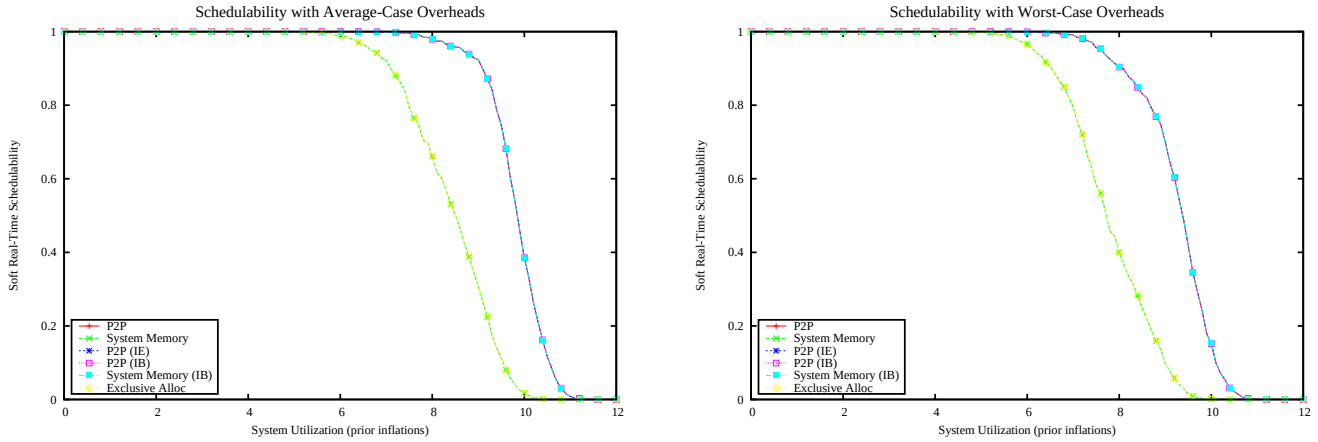

Figure 5742: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

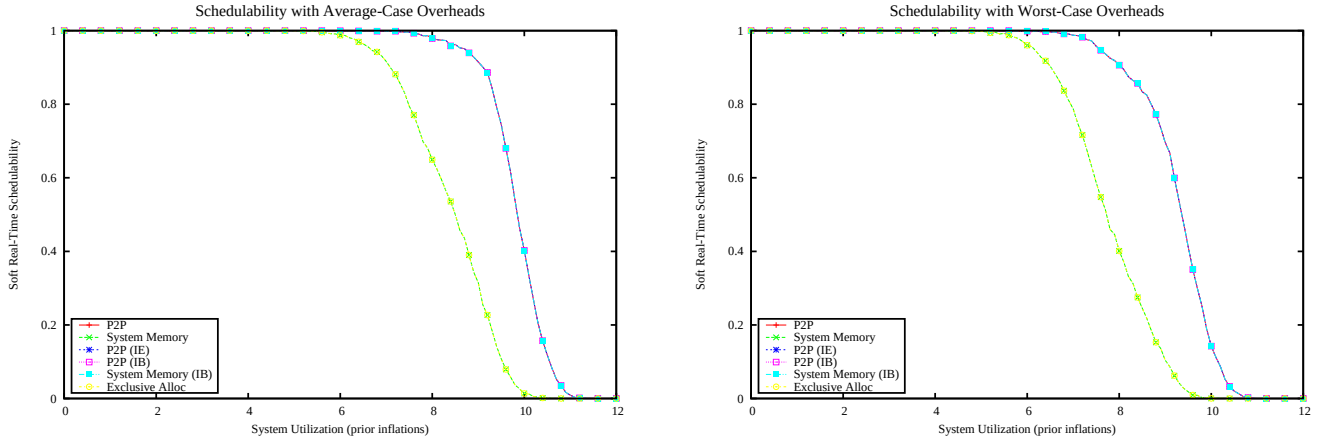

Figure 5743: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

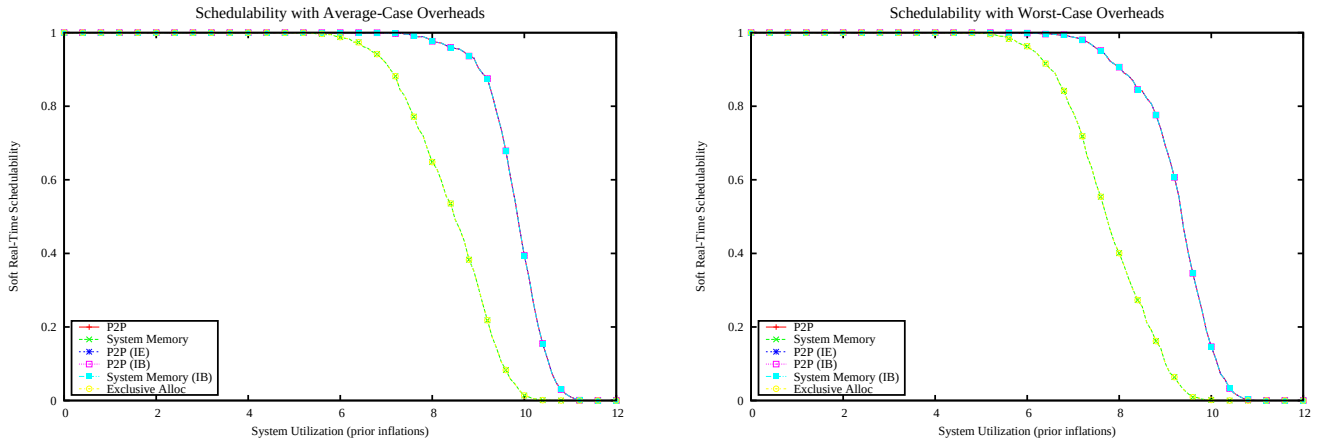

Figure 5744: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

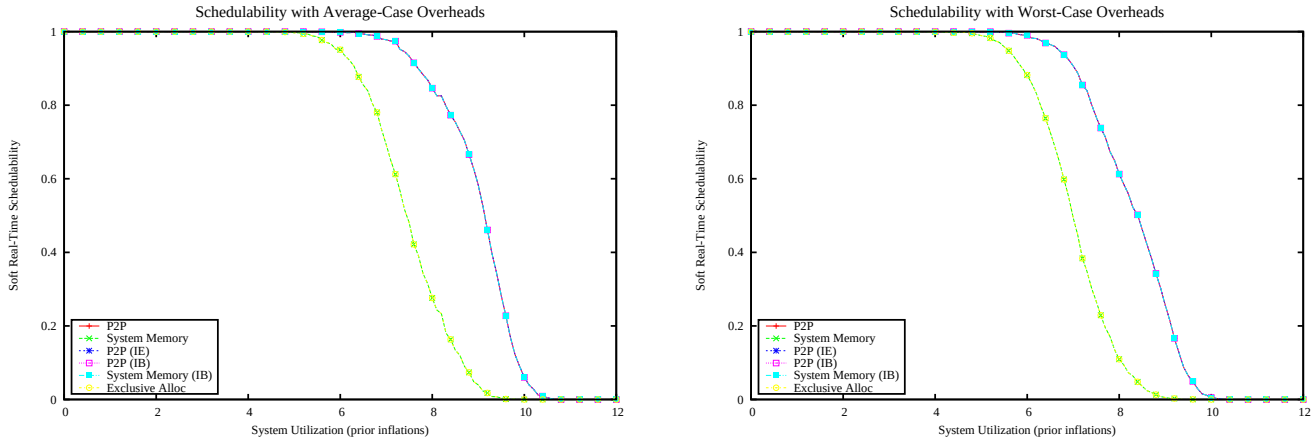

Figure 5745: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

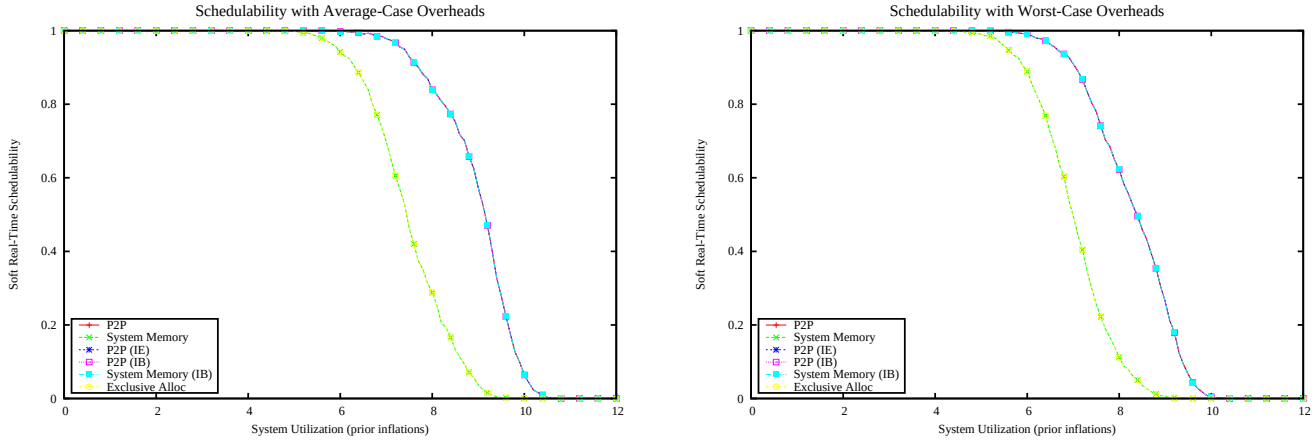

Figure 5746: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

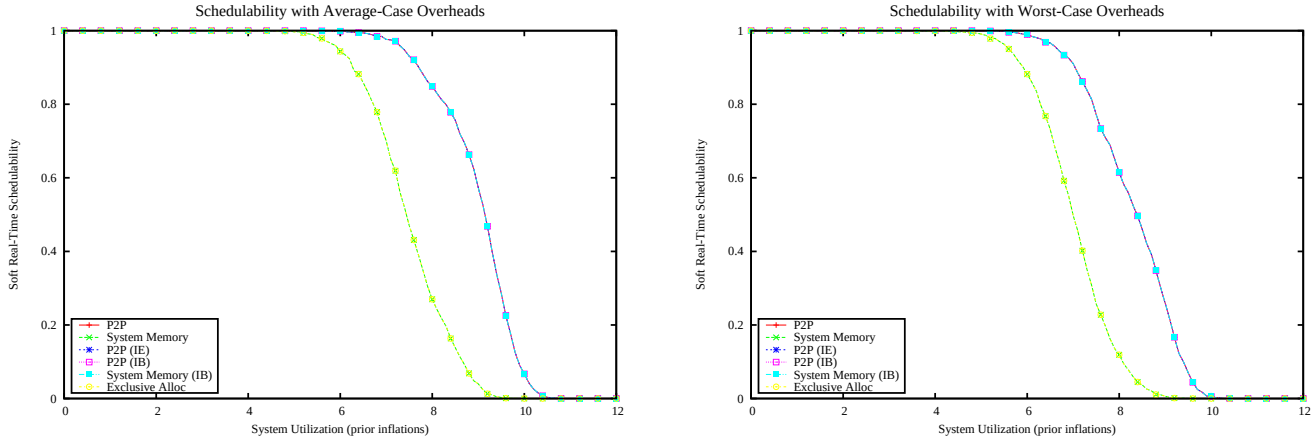

Figure 5747: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

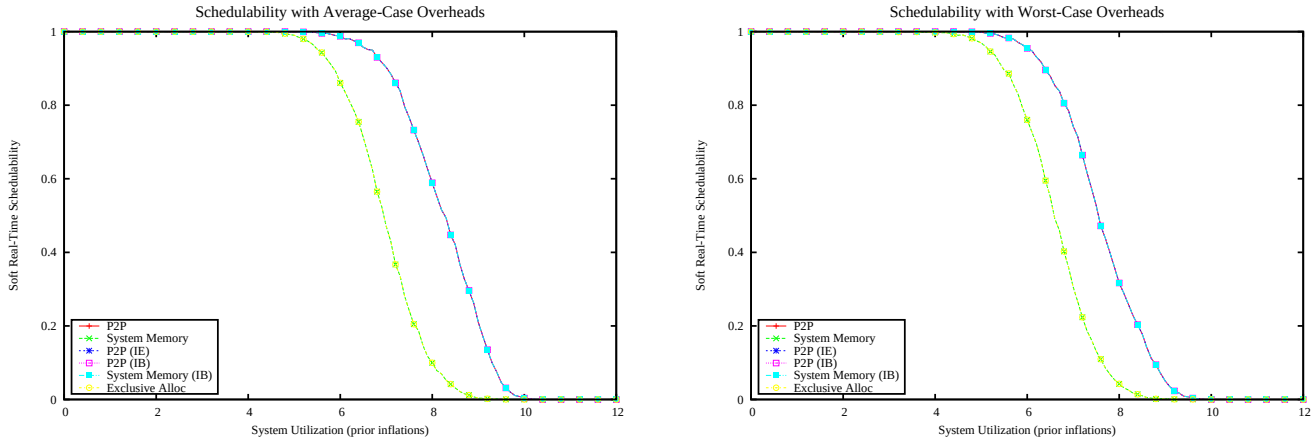

Figure 5748: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

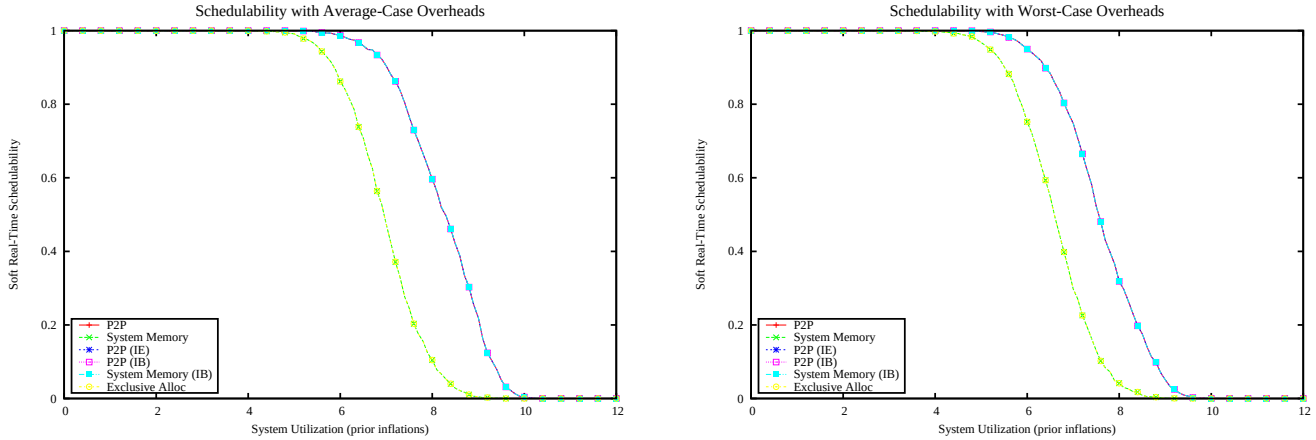

Figure 5749: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

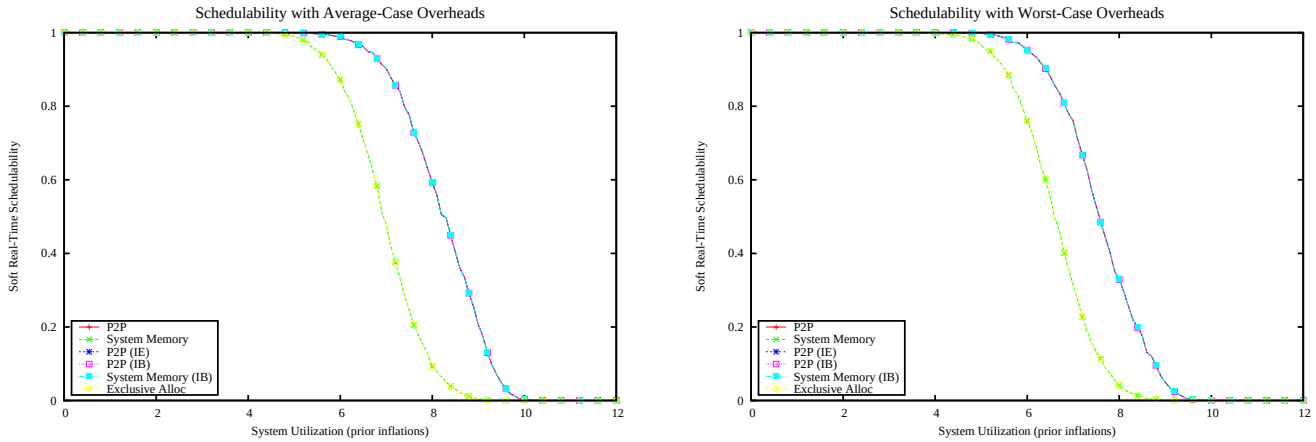

Figure 5750: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

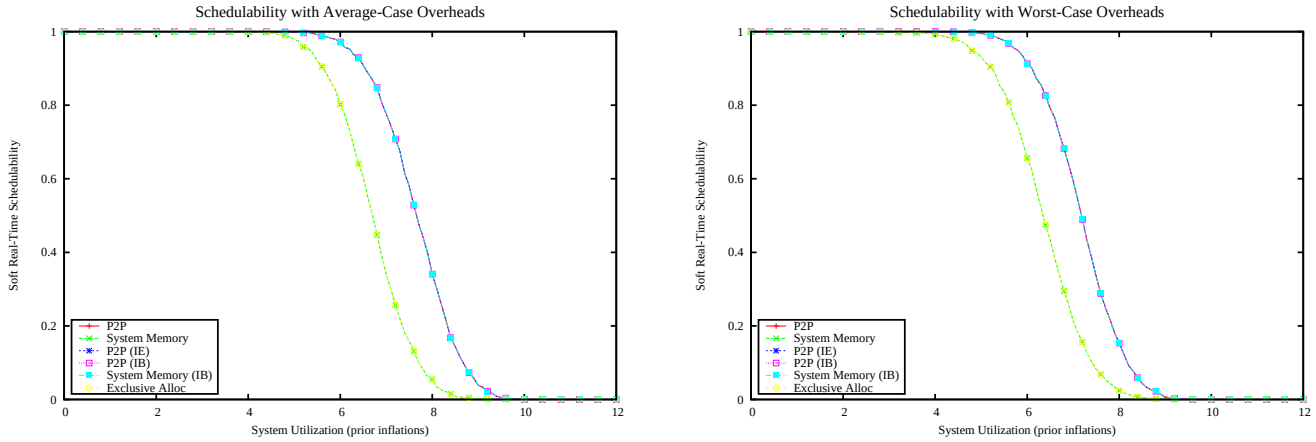

Figure 5751: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

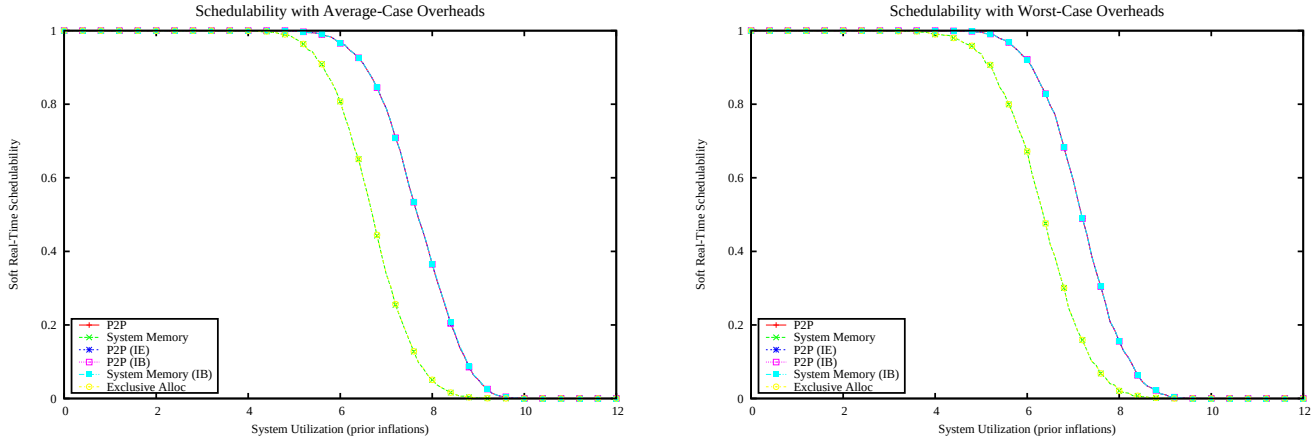

Figure 5752: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

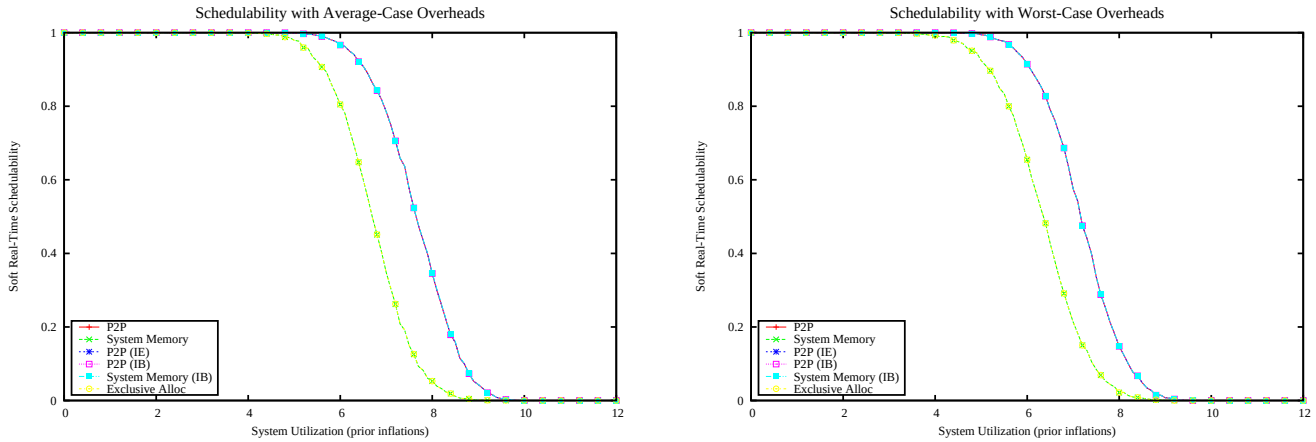

Figure 5753: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

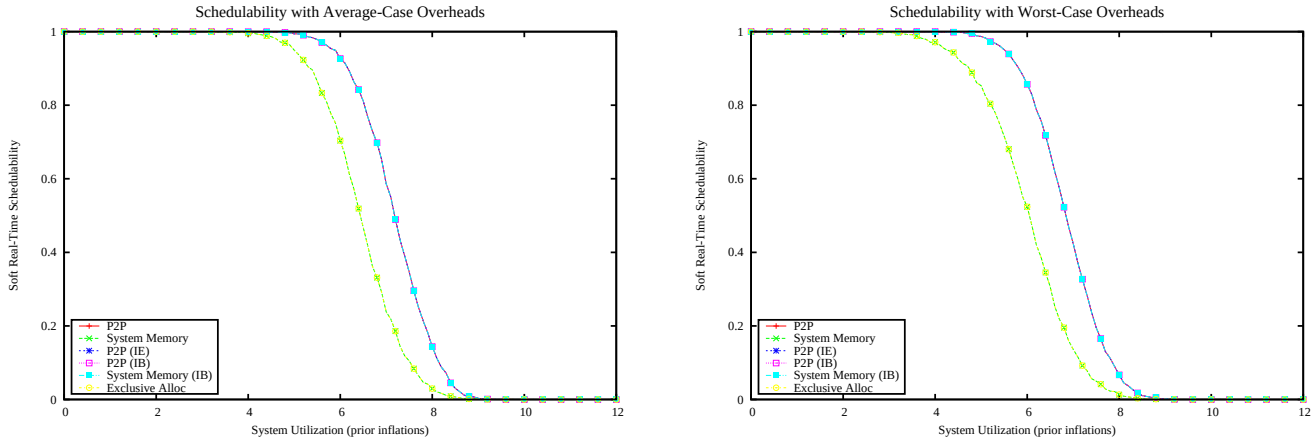

Figure 5754: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

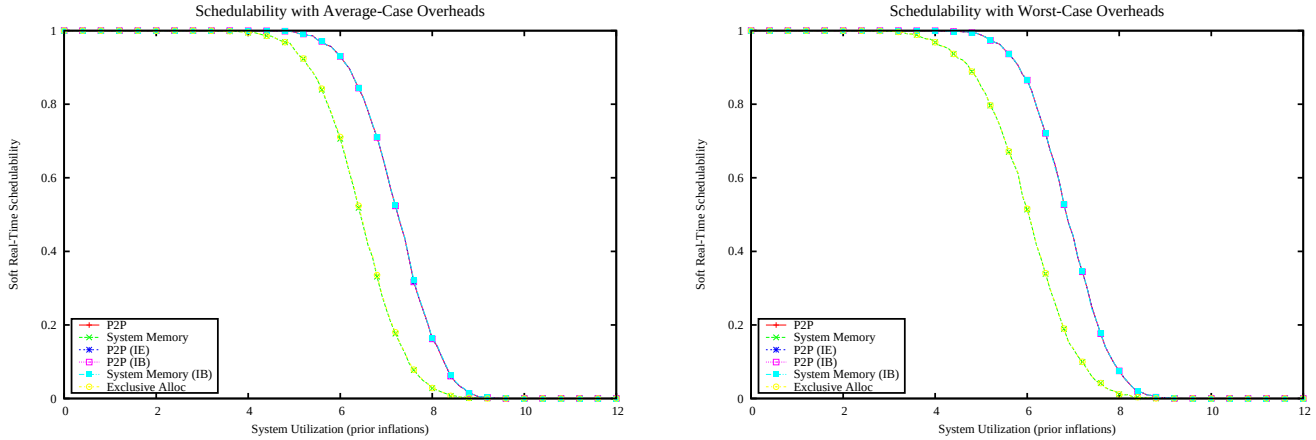

Figure 5755: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

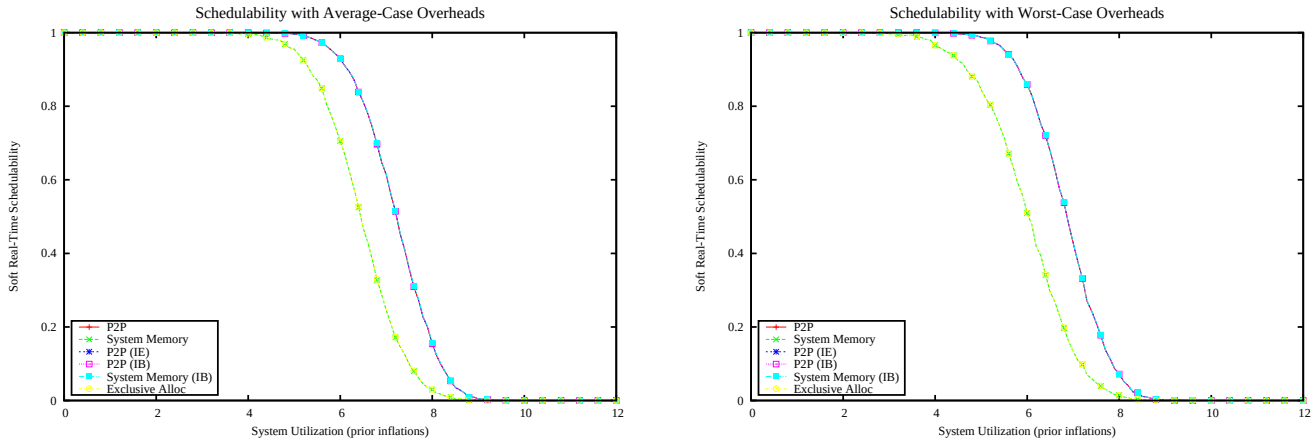

Figure 5756: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

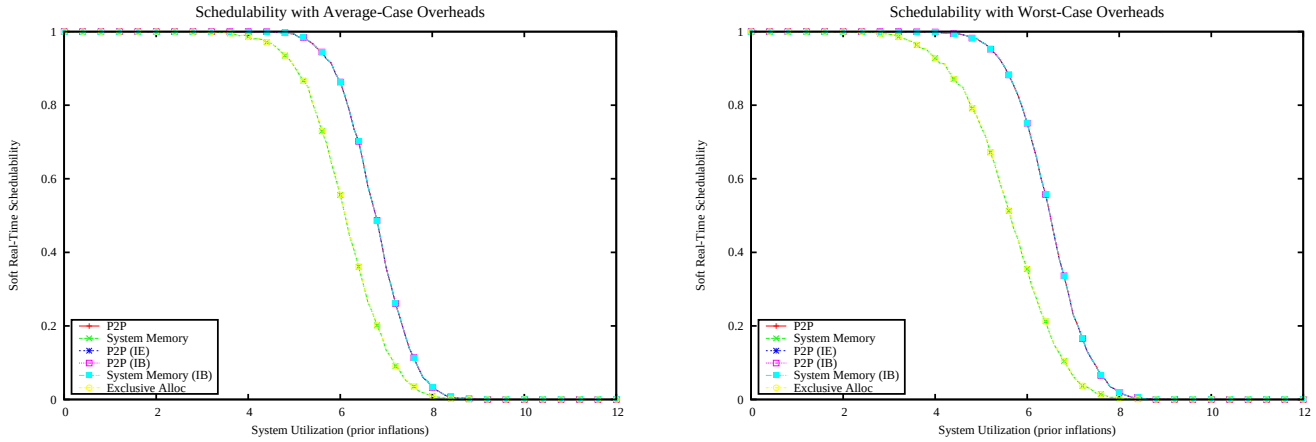

Figure 5757: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

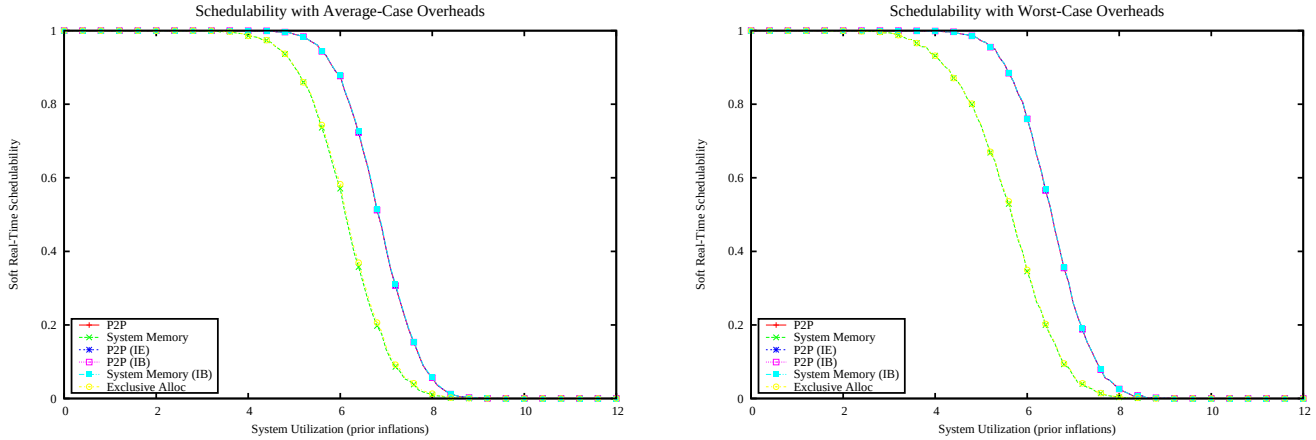

Figure 5758: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

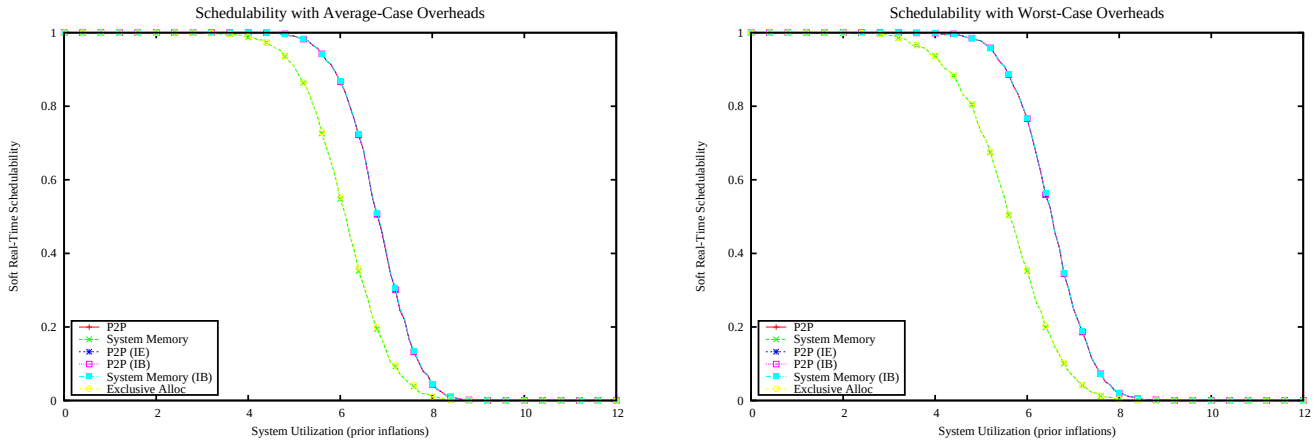

Figure 5759: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

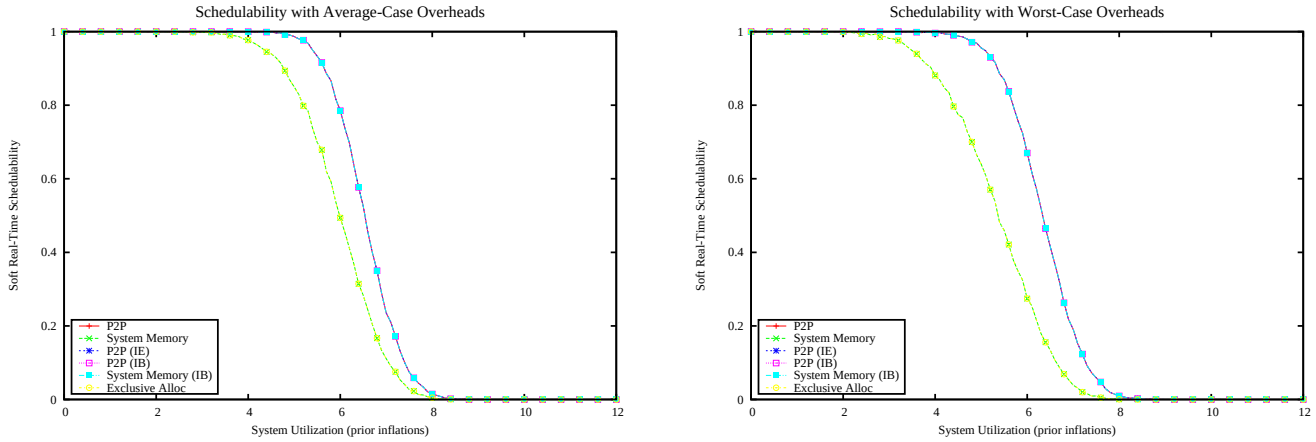

Figure 5760: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

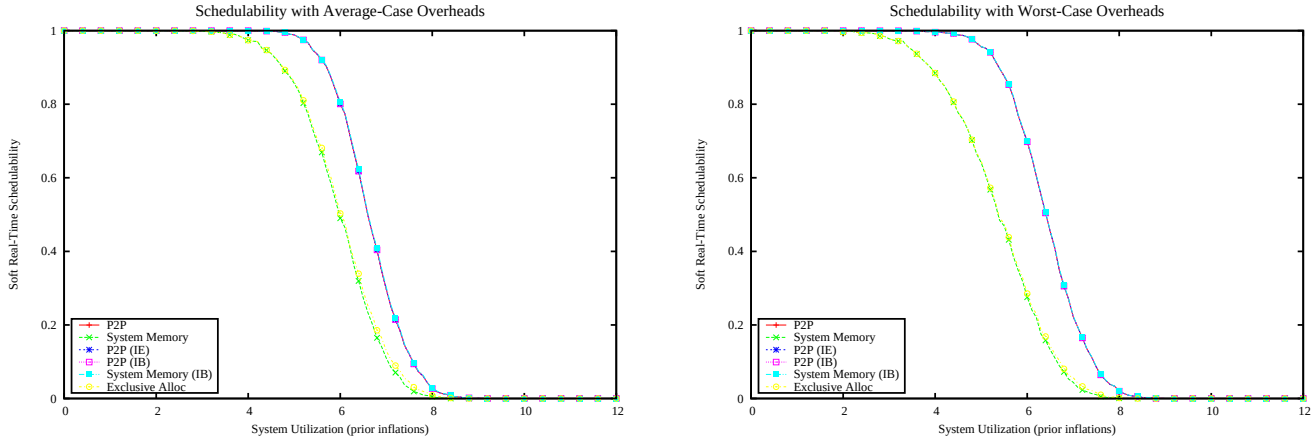

Figure 5761: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

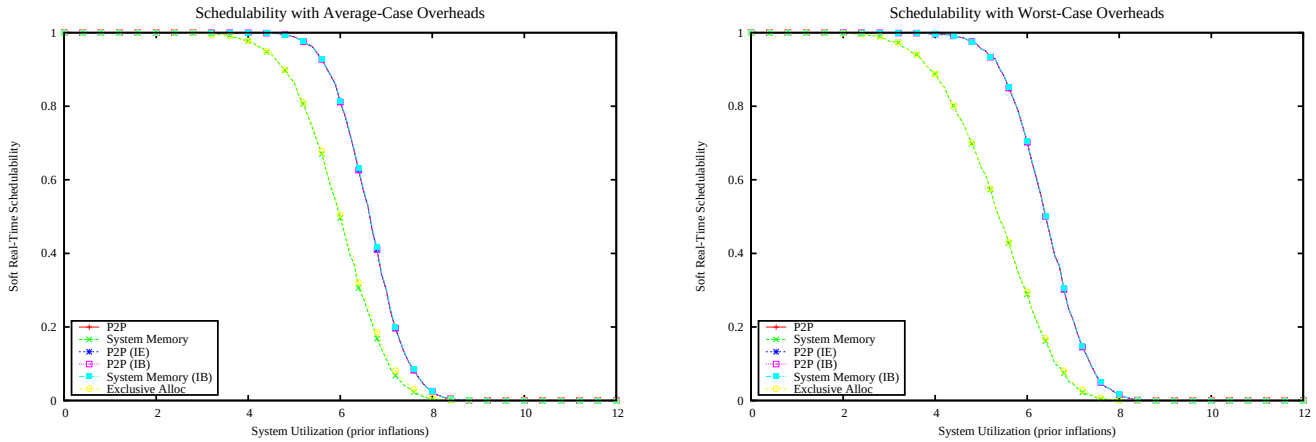

Figure 5762: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

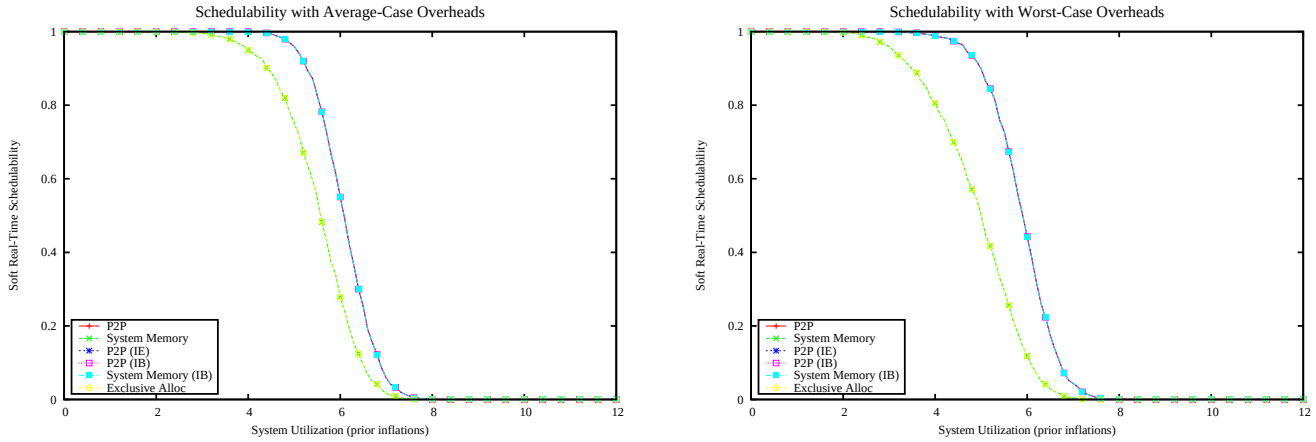

Figure 5763: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

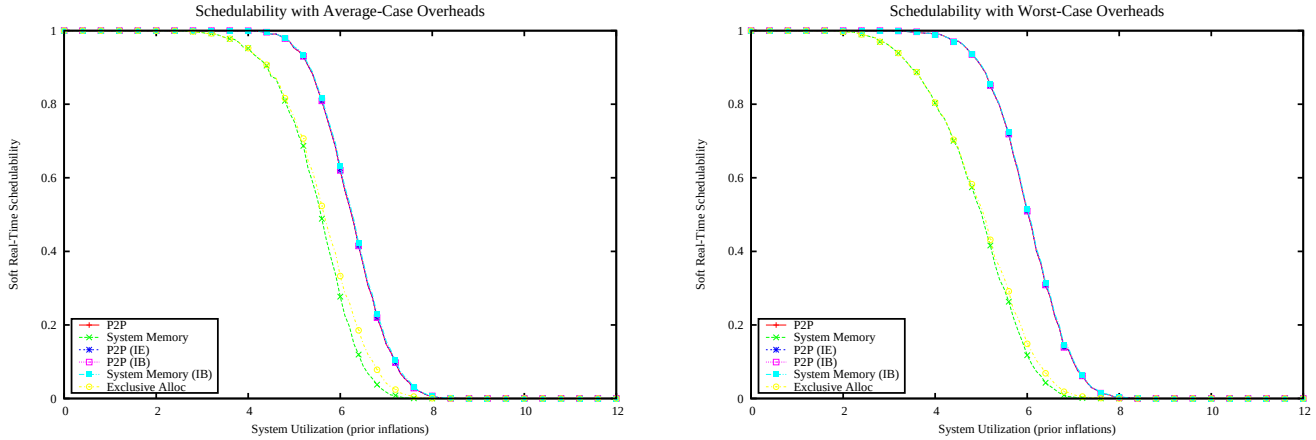

Figure 5764: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

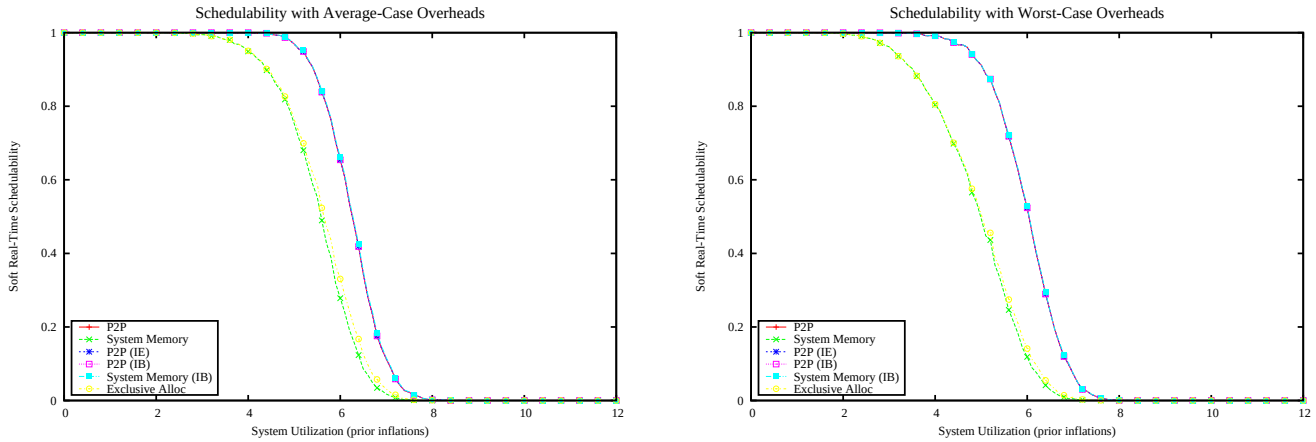

Figure 5765: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

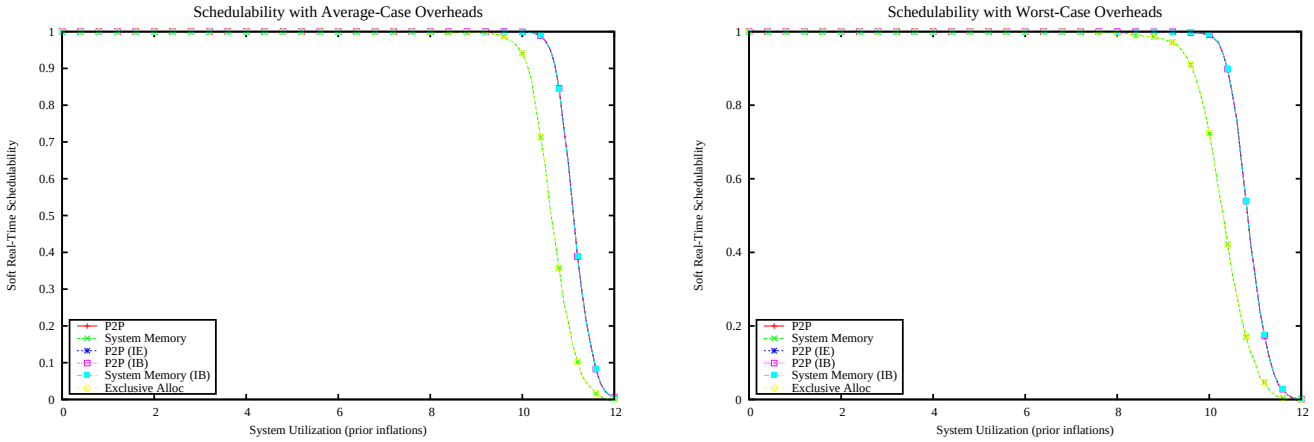

Figure 5766: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

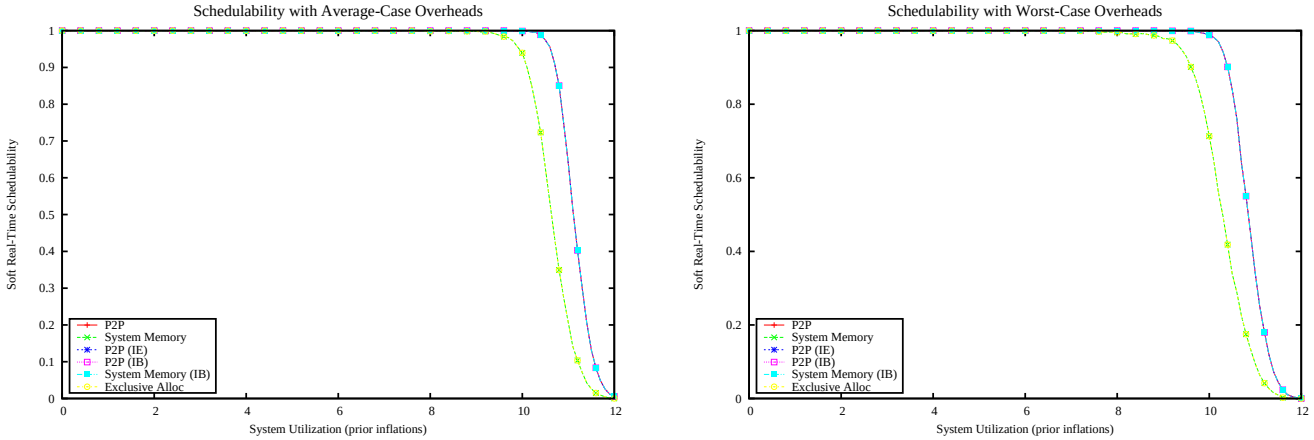

Figure 5767: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

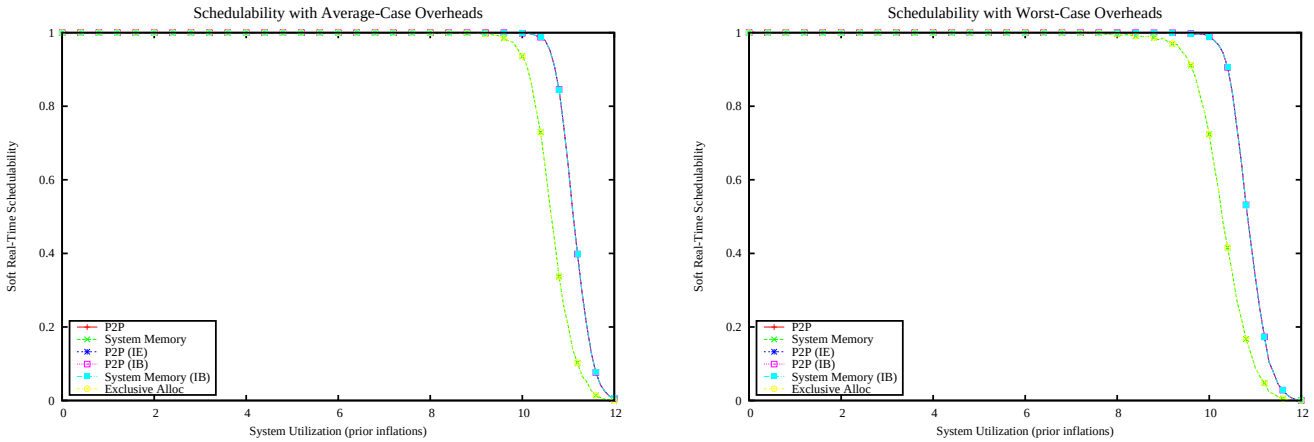

Figure 5768: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

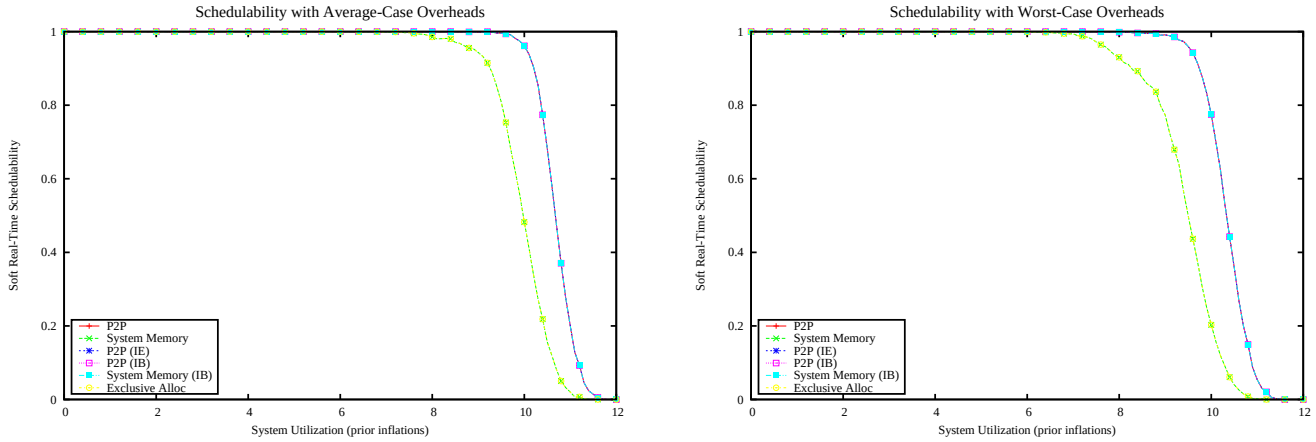

Figure 5769: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

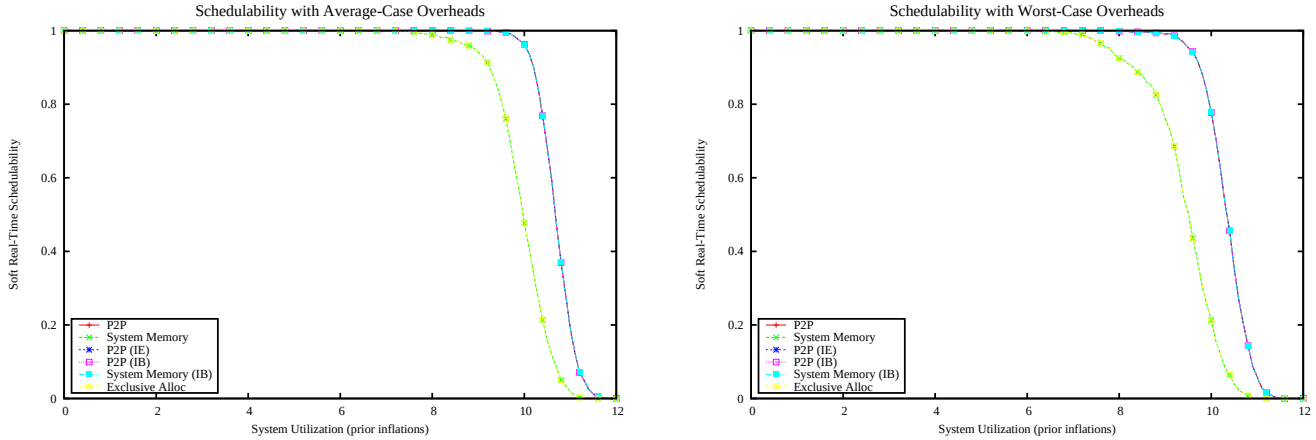

Figure 5770: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

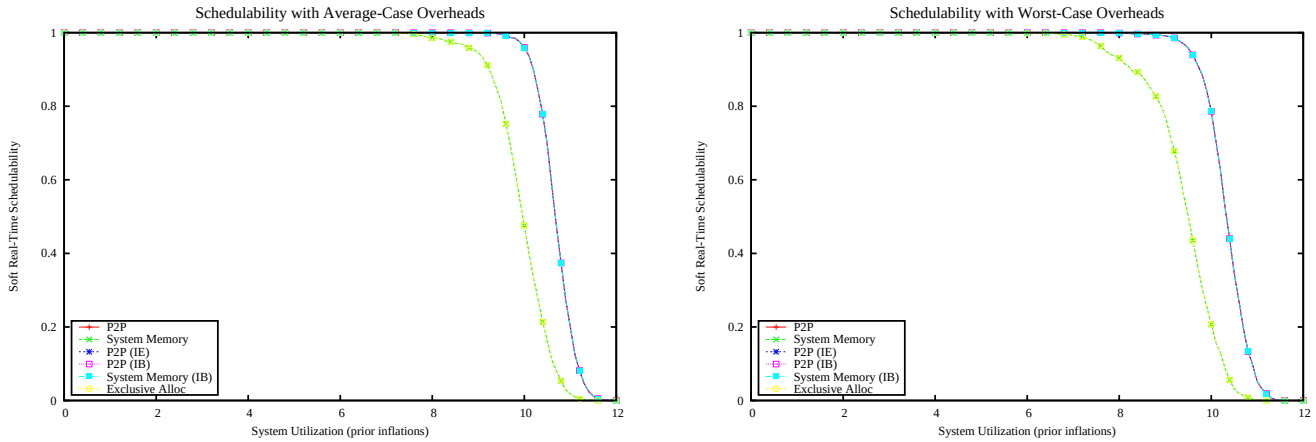

Figure 5771: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

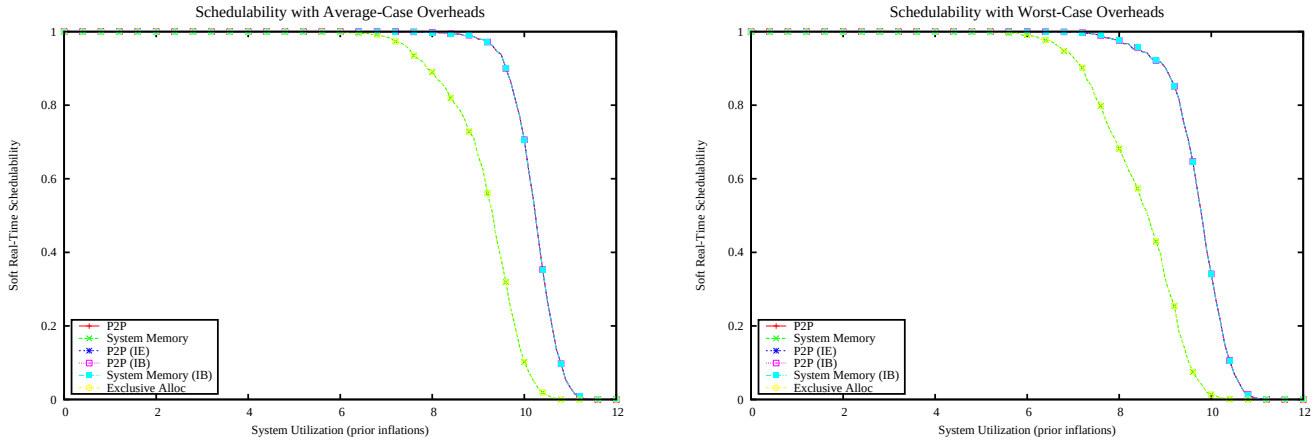

Figure 5772: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

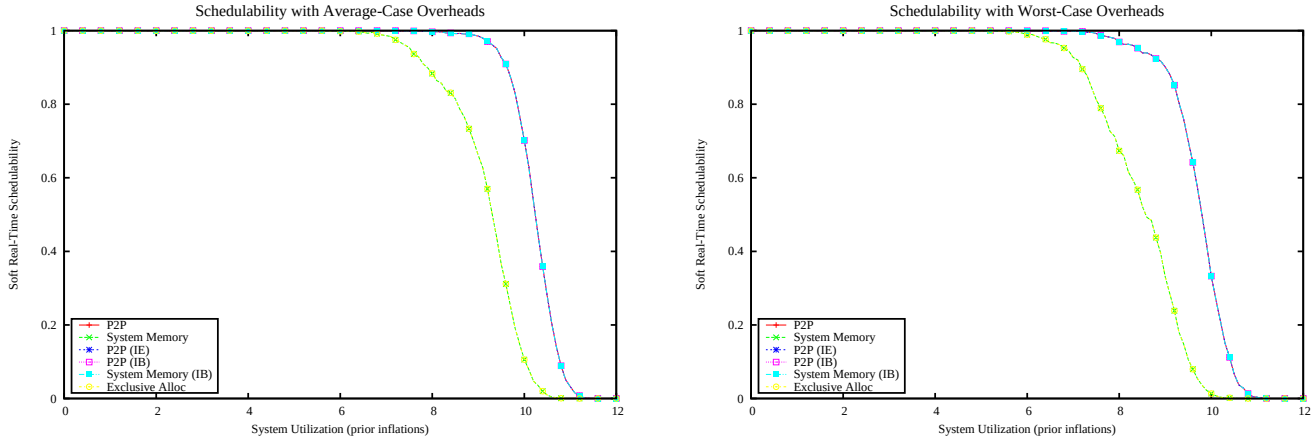

Figure 5773: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

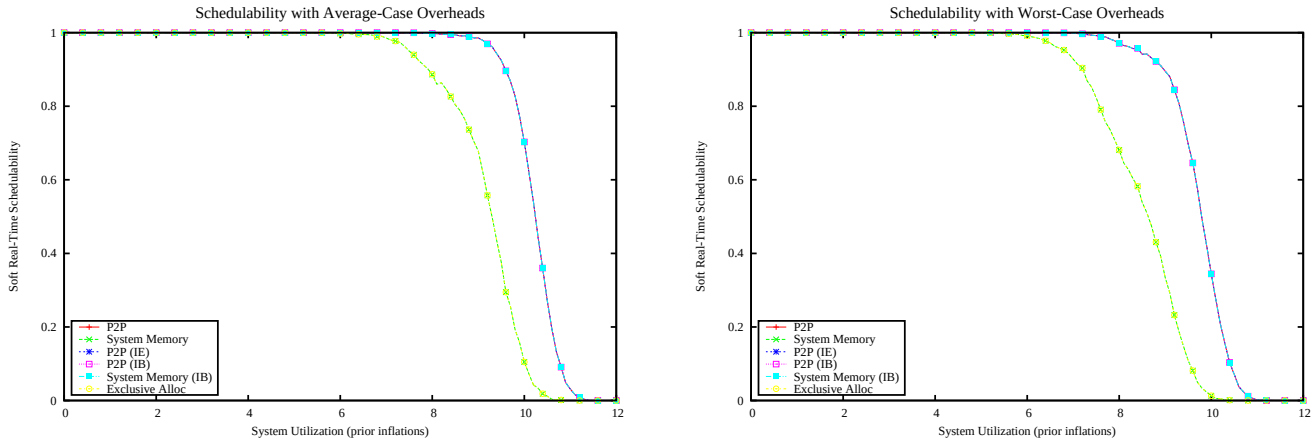

Figure 5774: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

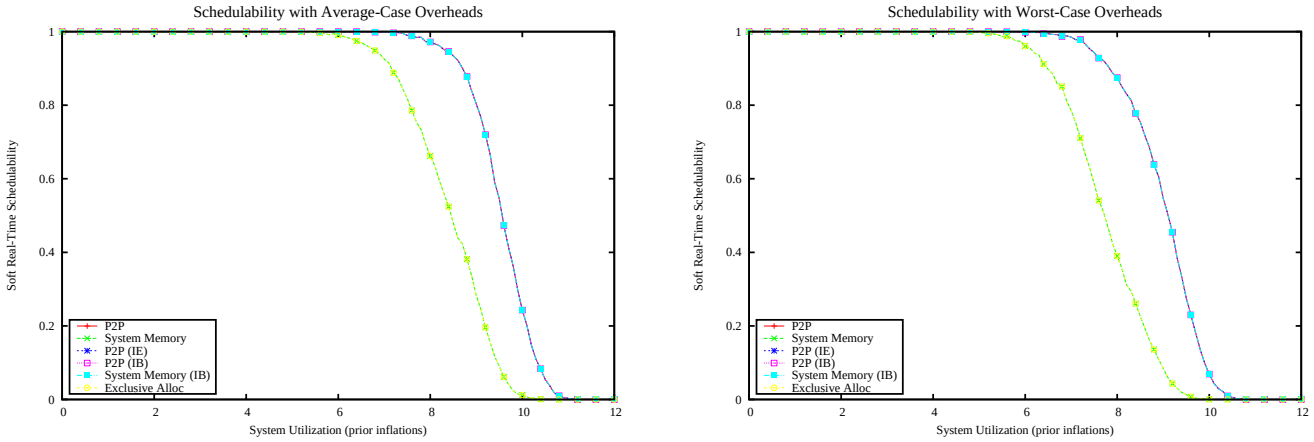

Figure 5775: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

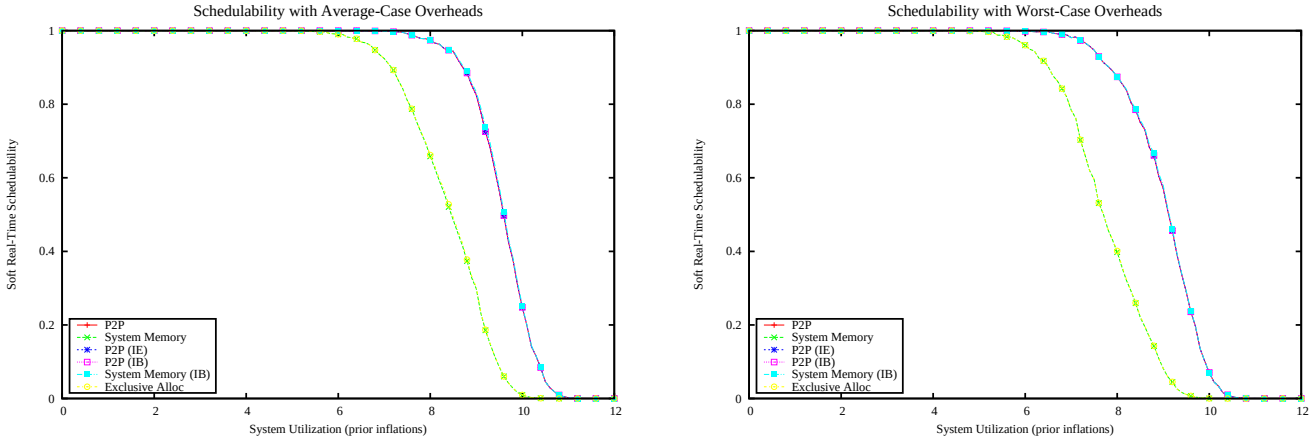

Figure 5776: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

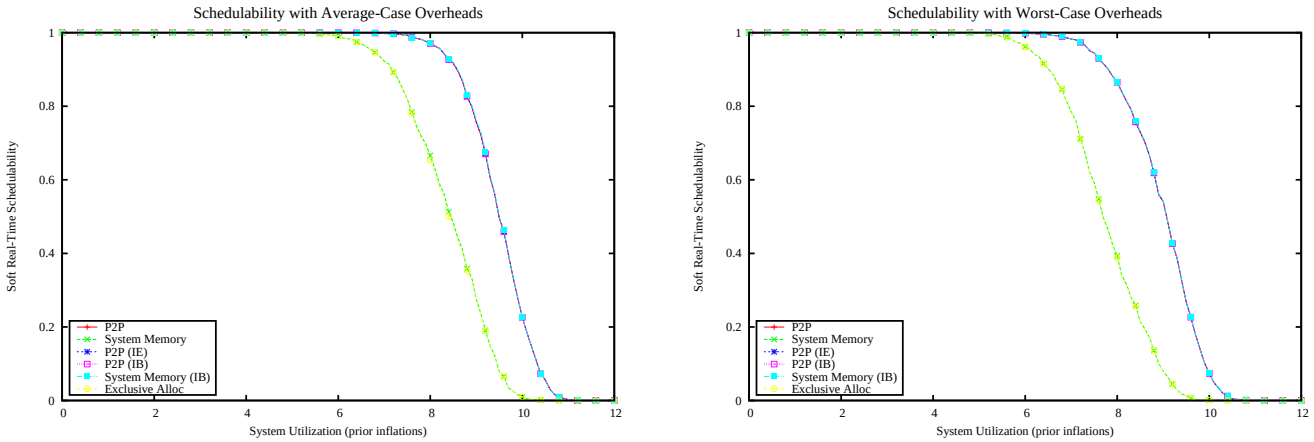

Figure 5777: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

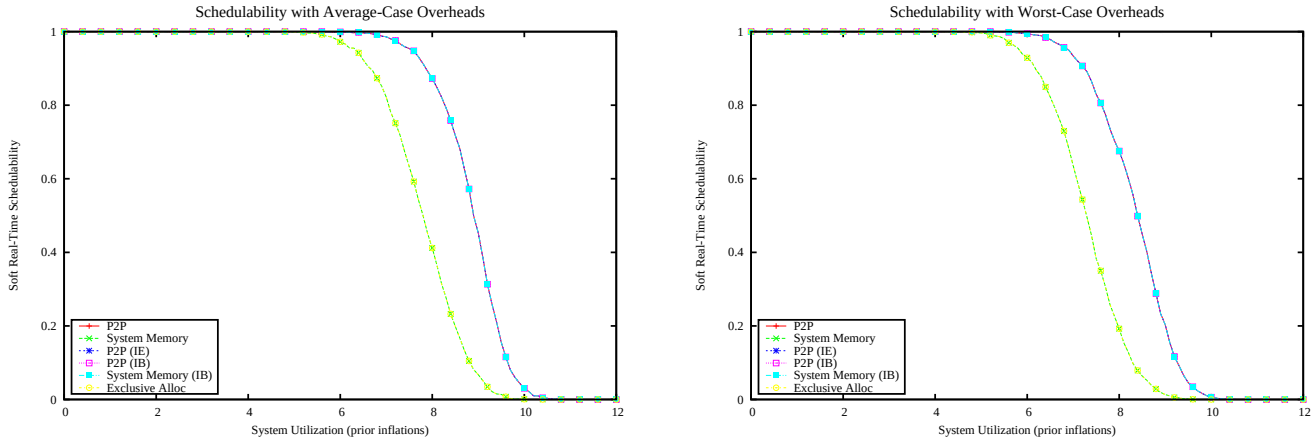

Figure 5778: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

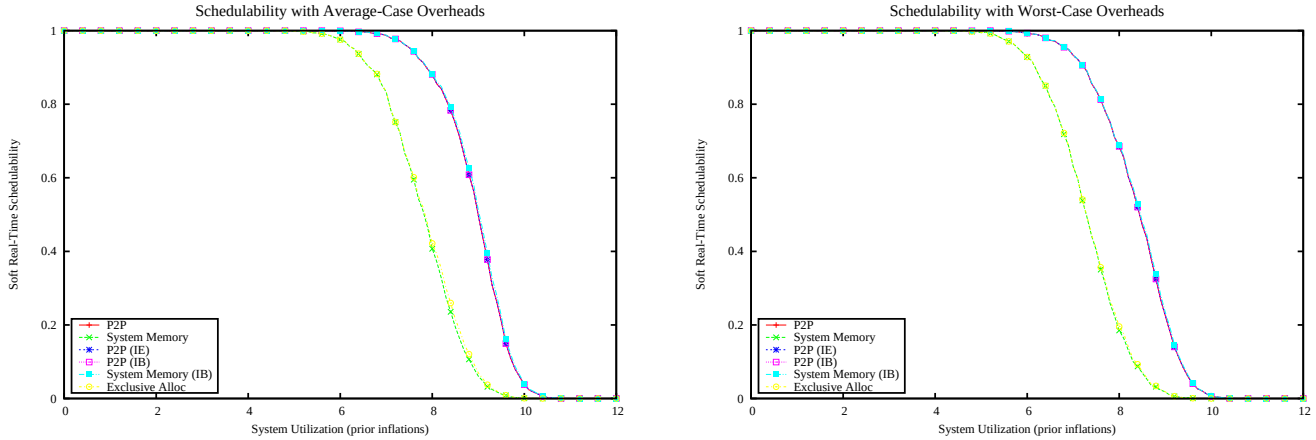

Figure 5779: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

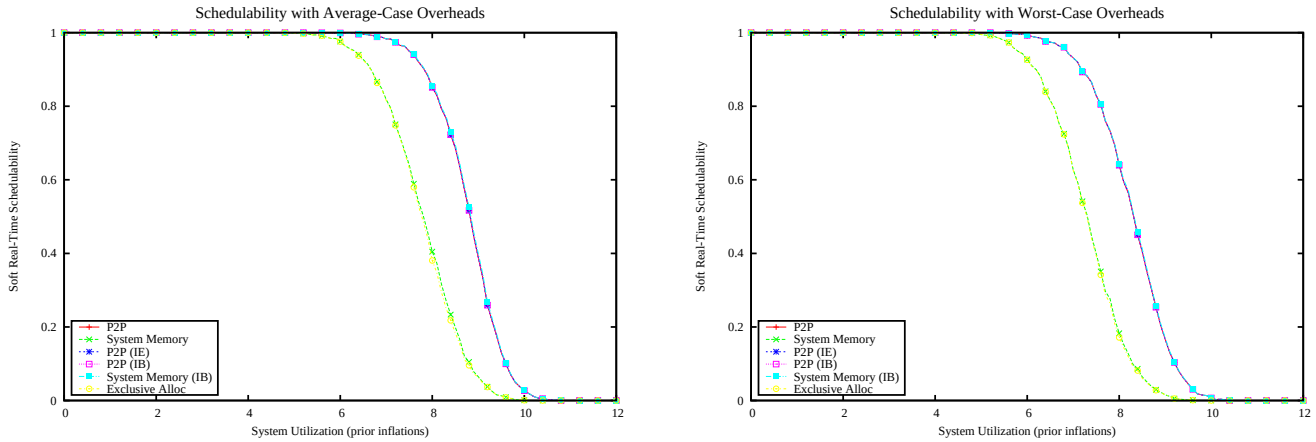

Figure 5780: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

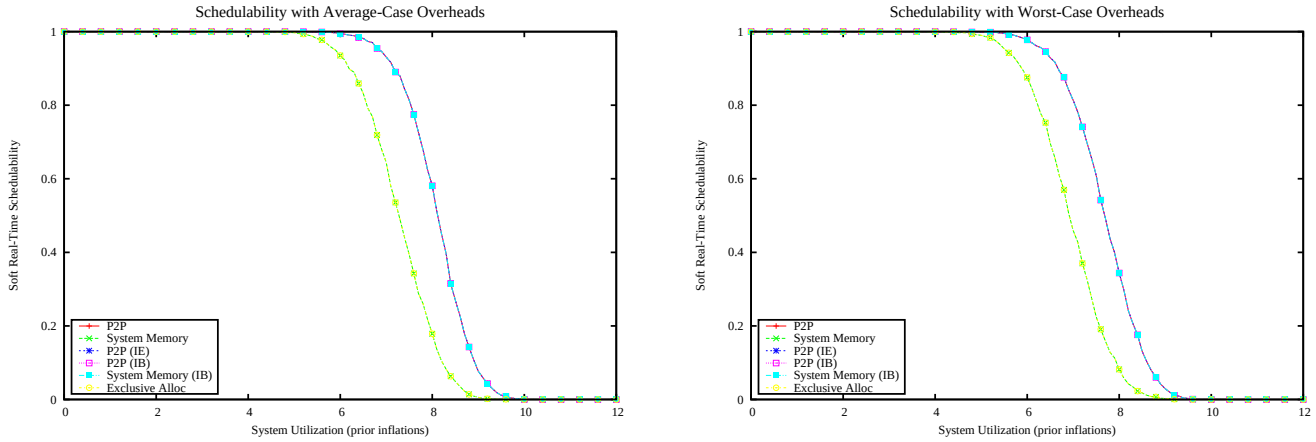

Figure 5781: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

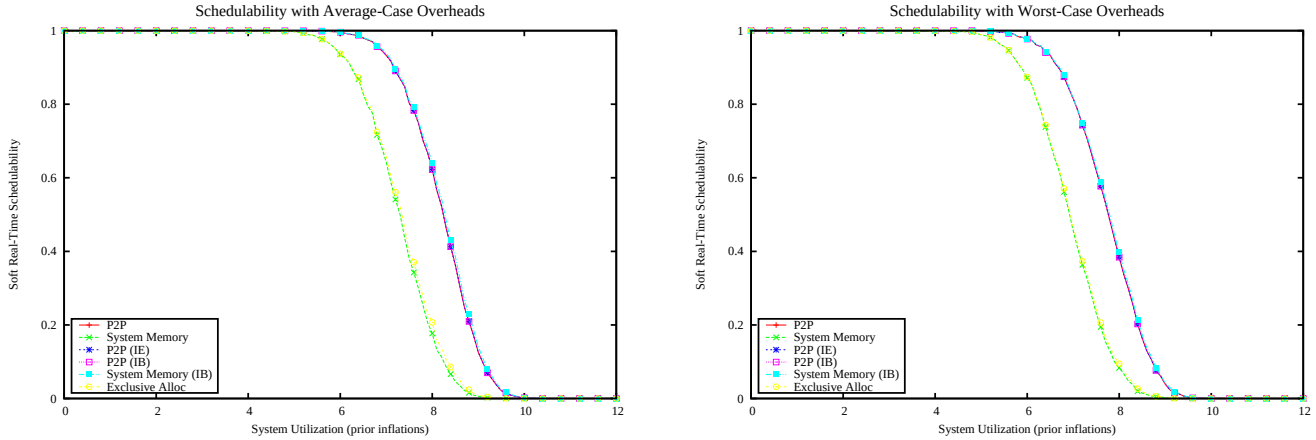

Figure 5782: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

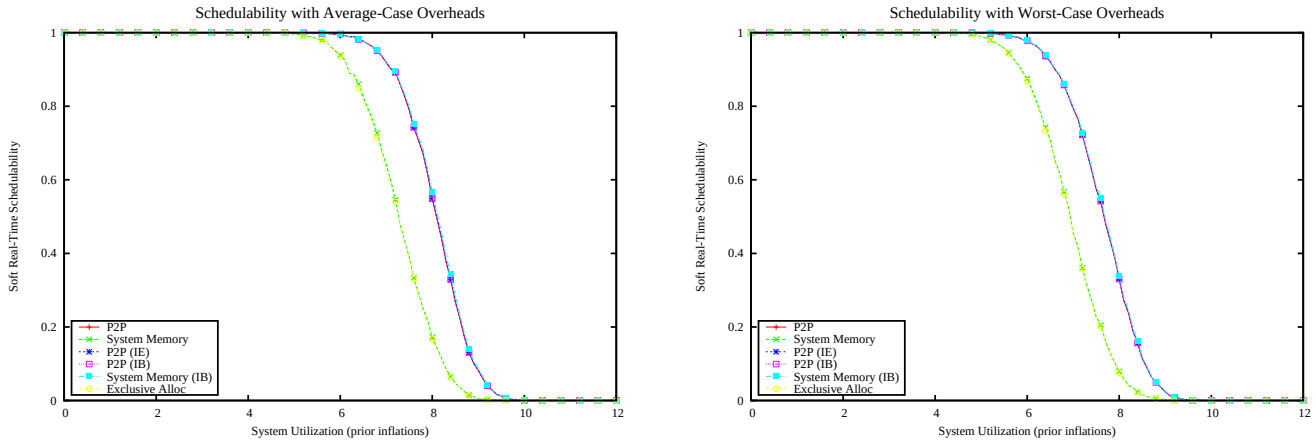

Figure 5783: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

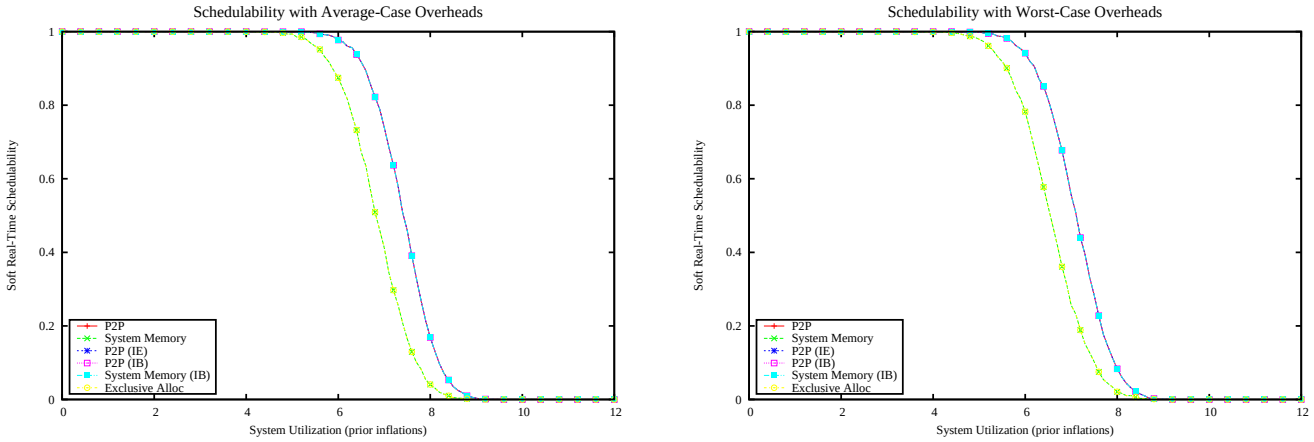

Figure 5784: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

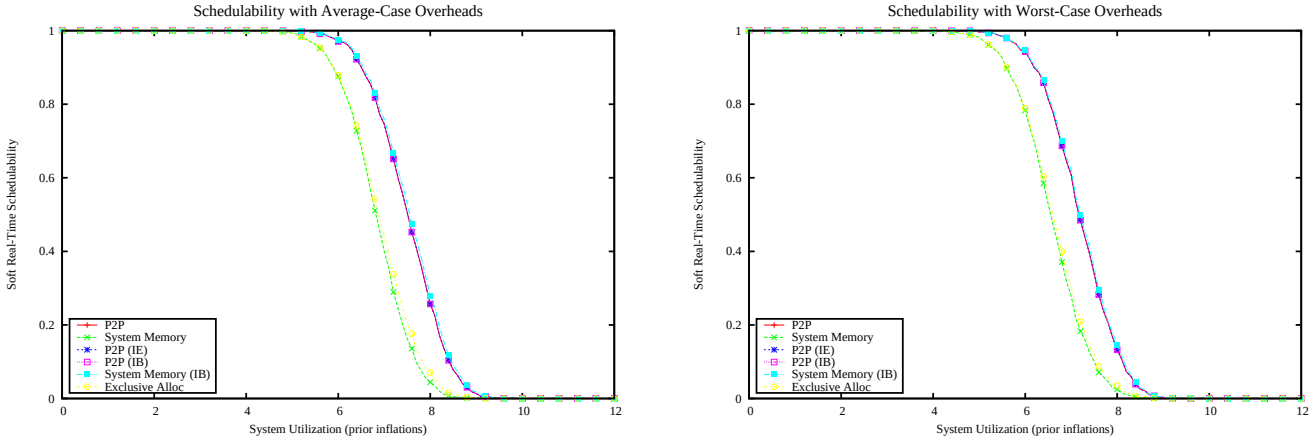

Figure 5785: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

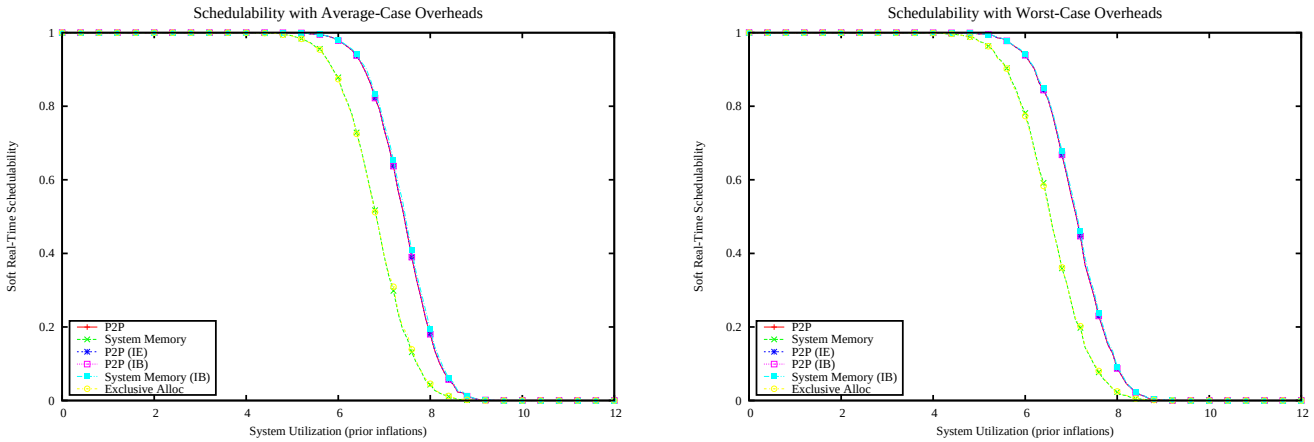

Figure 5786: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

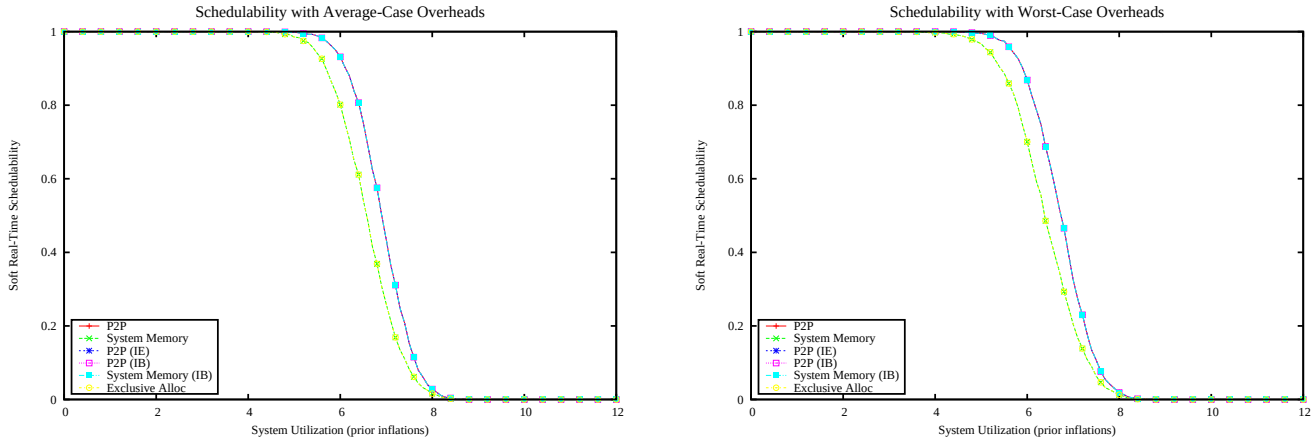

Figure 5787: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

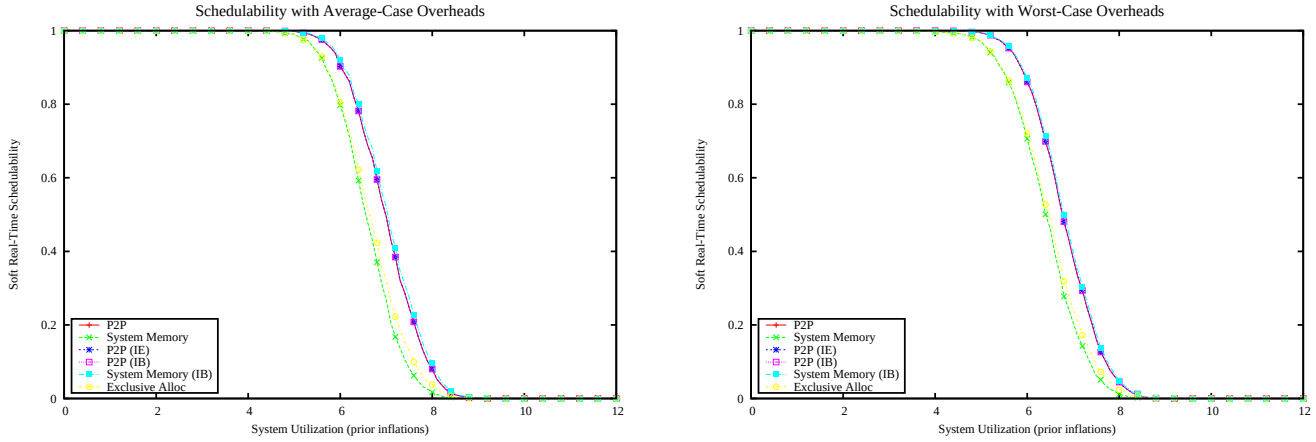

Figure 5788: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

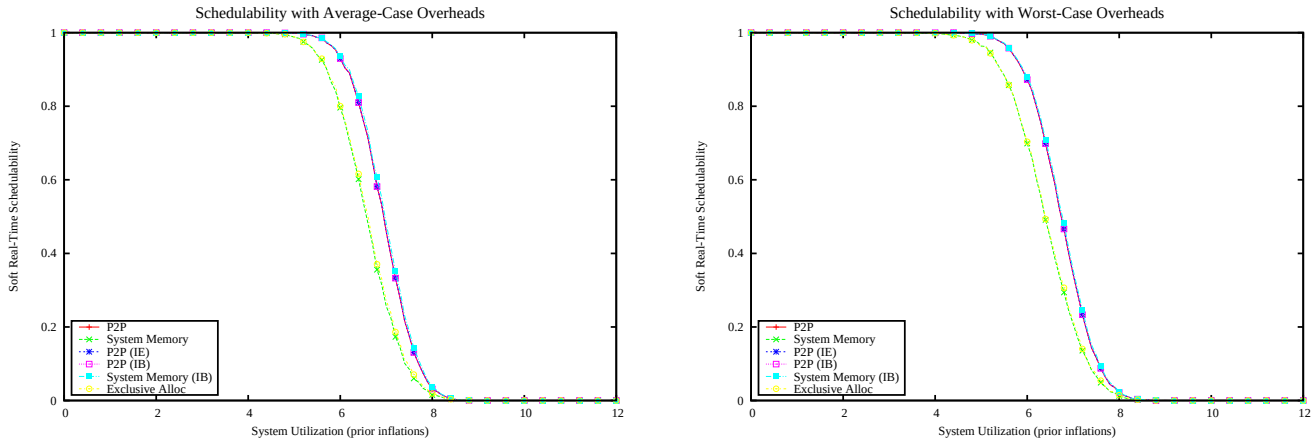

Figure 5789: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

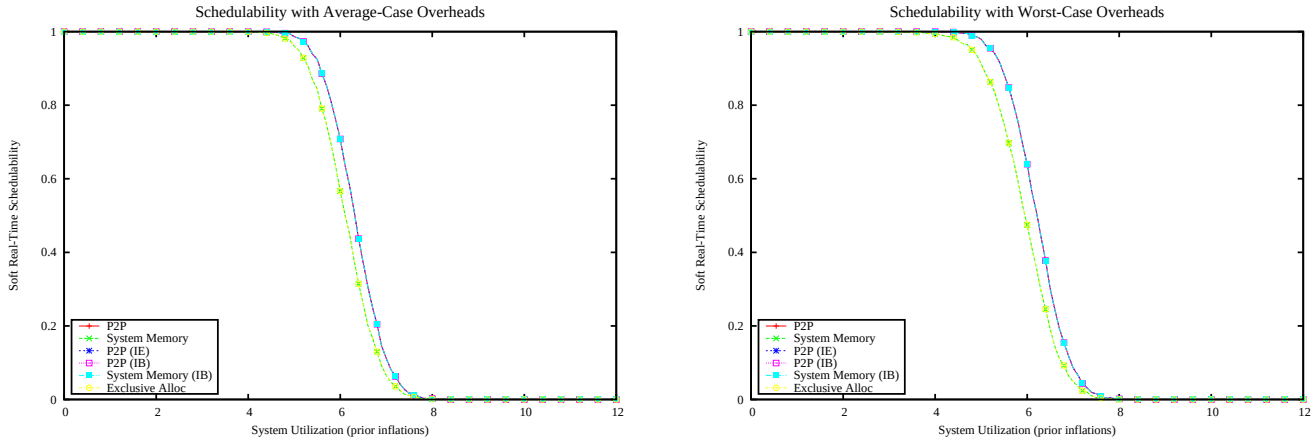

Figure 5790: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

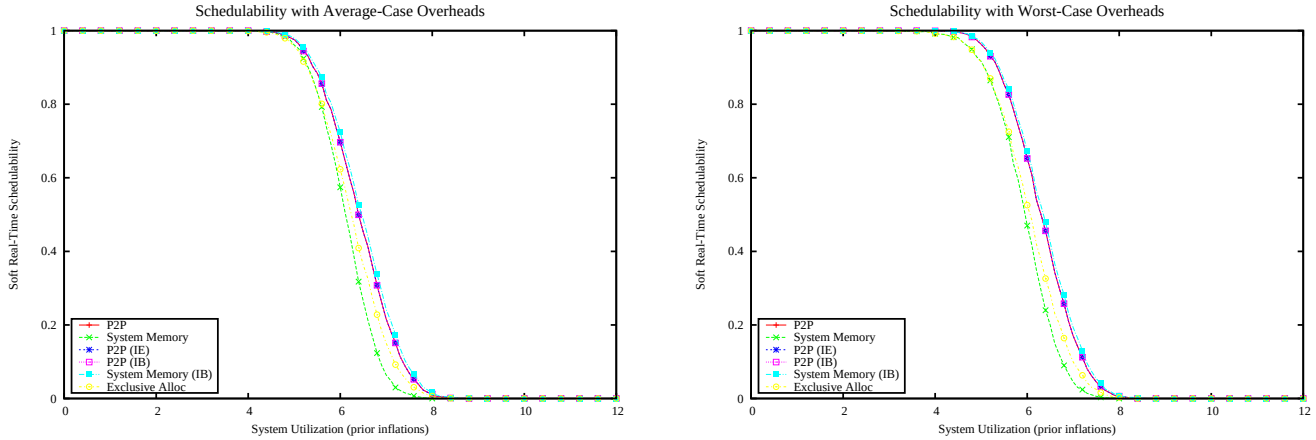

Figure 5791: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

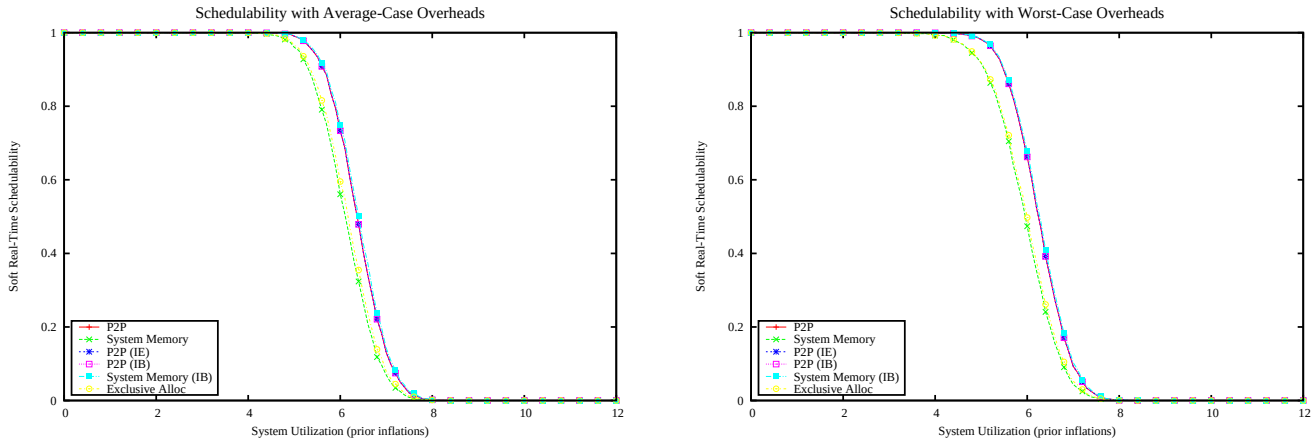

Figure 5792: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

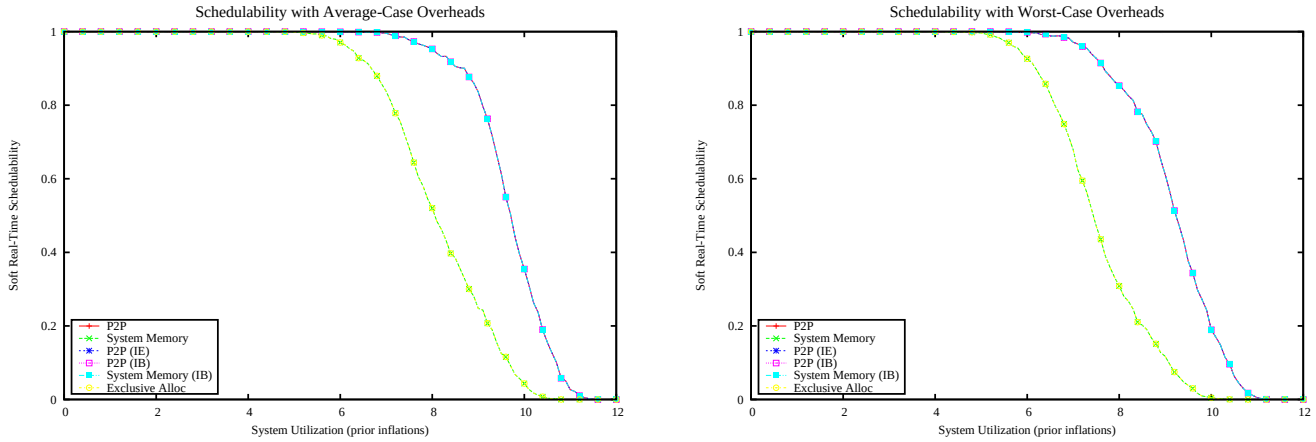

Figure 5793: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

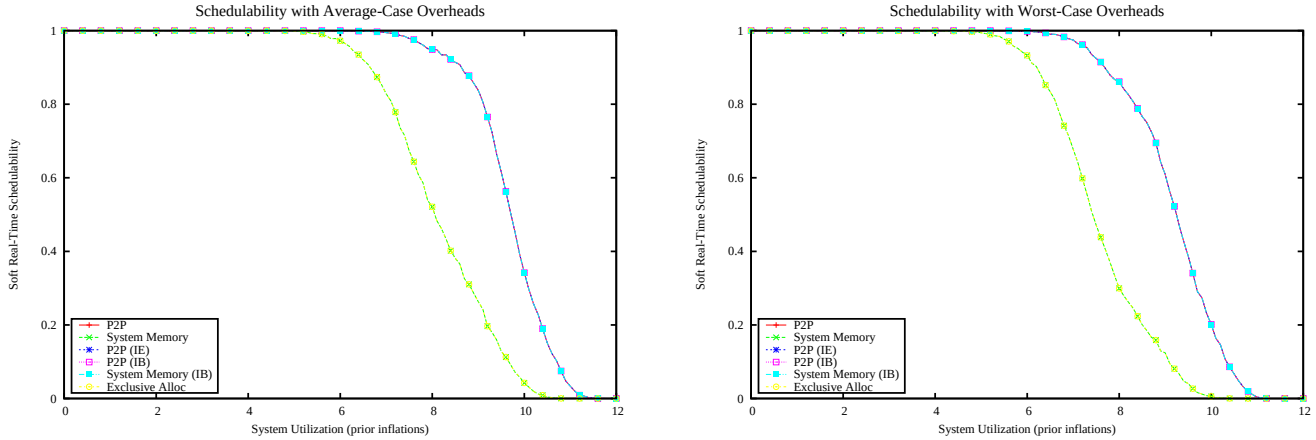

Figure 5794: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

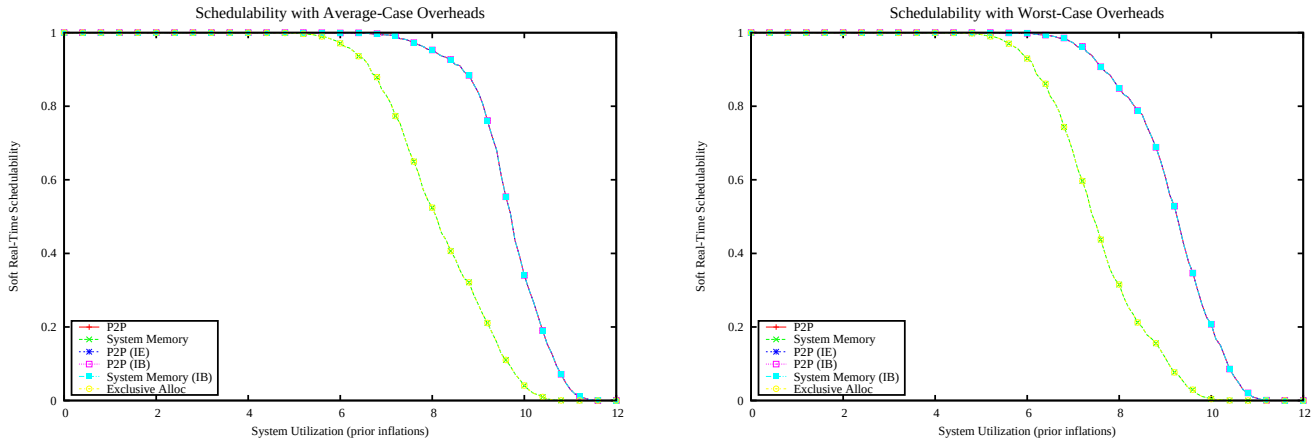

Figure 5795: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

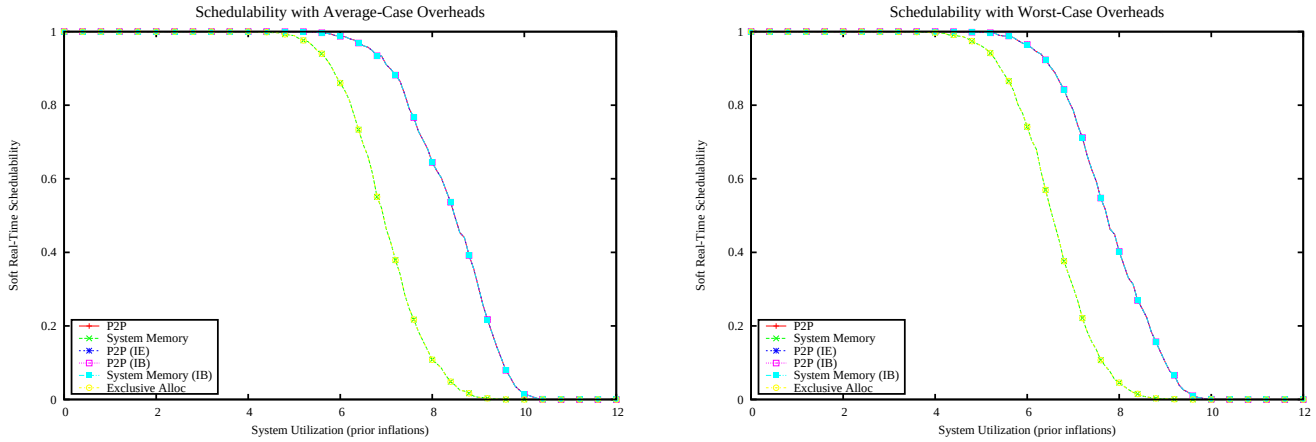

Figure 5796: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

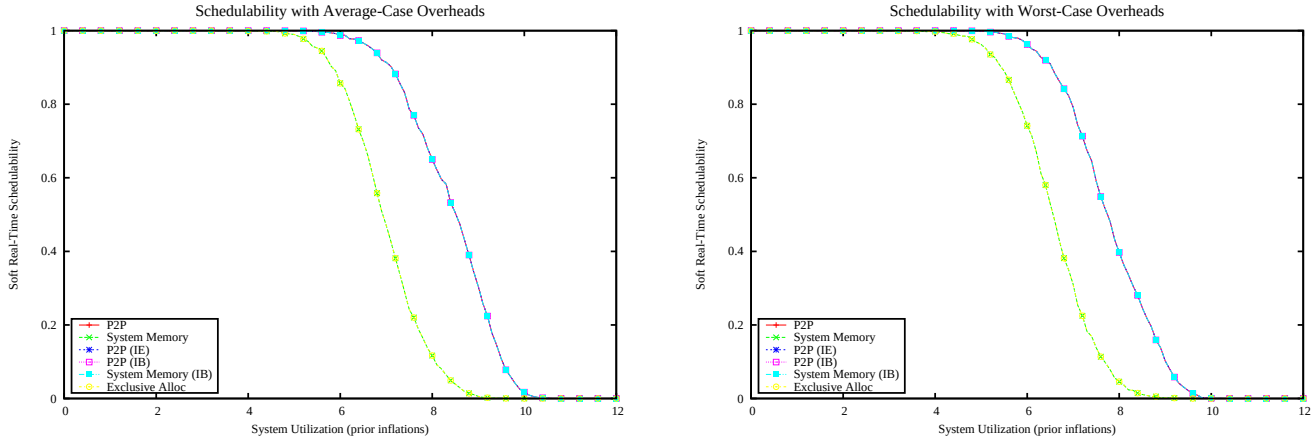

Figure 5797: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

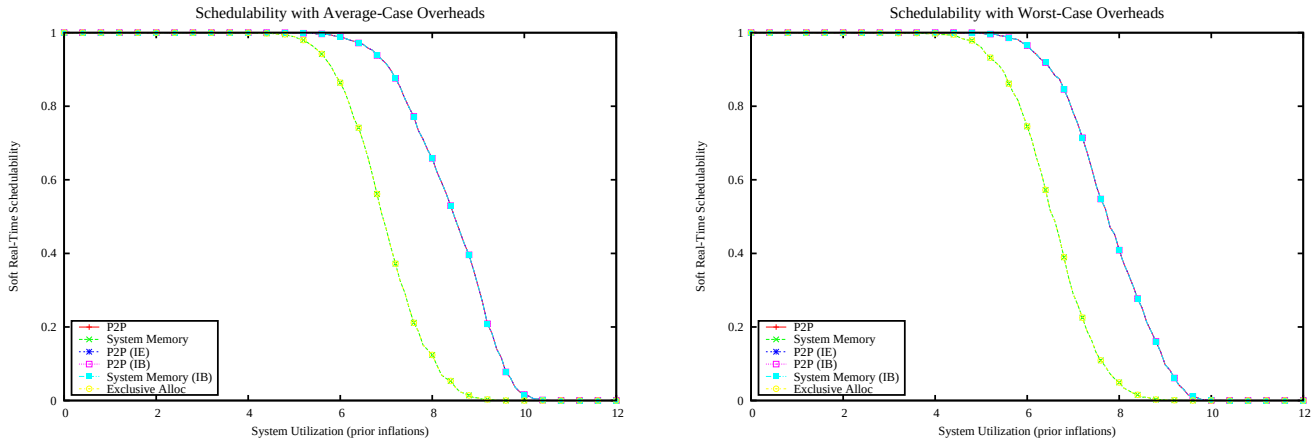

Figure 5798: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

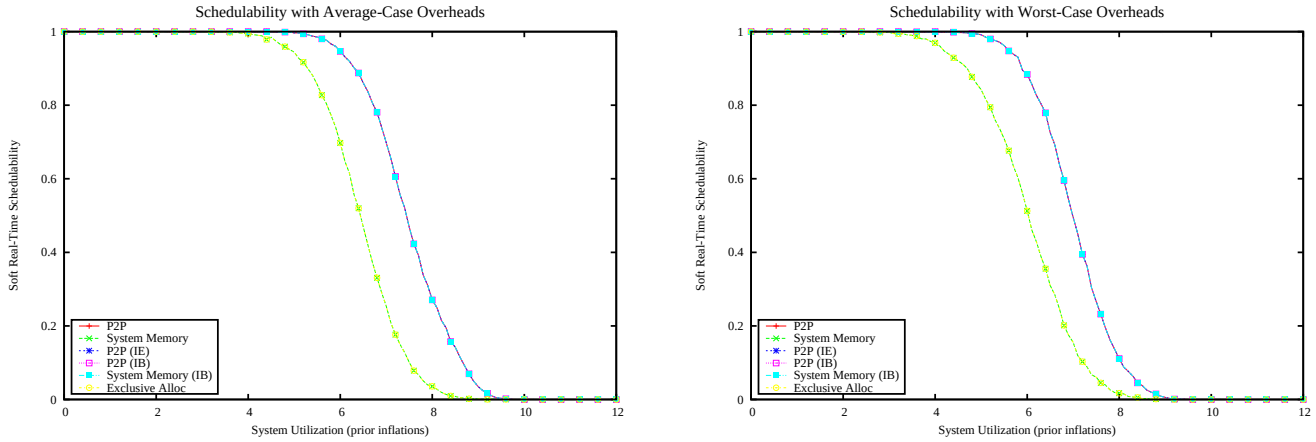

Figure 5799: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

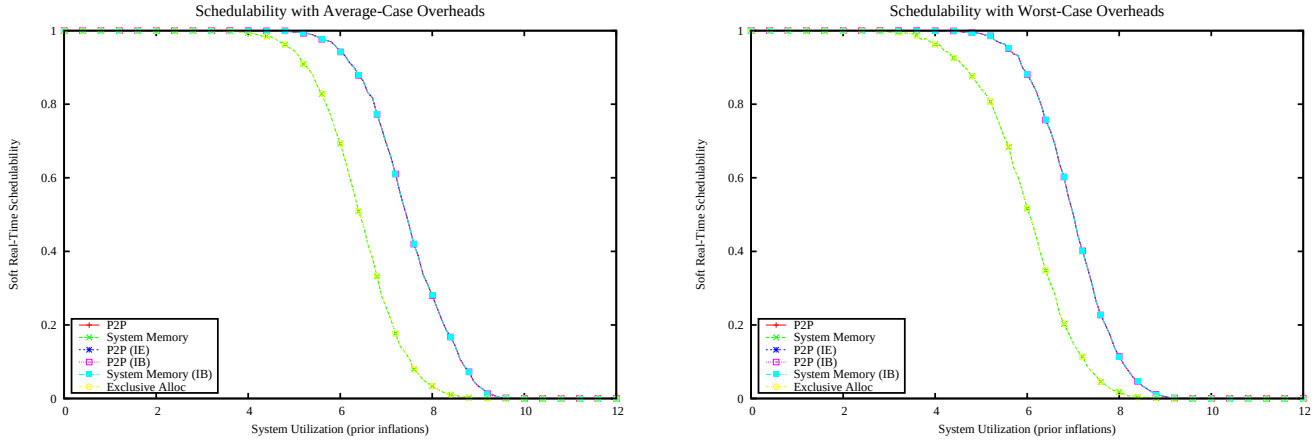

Figure 5800: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

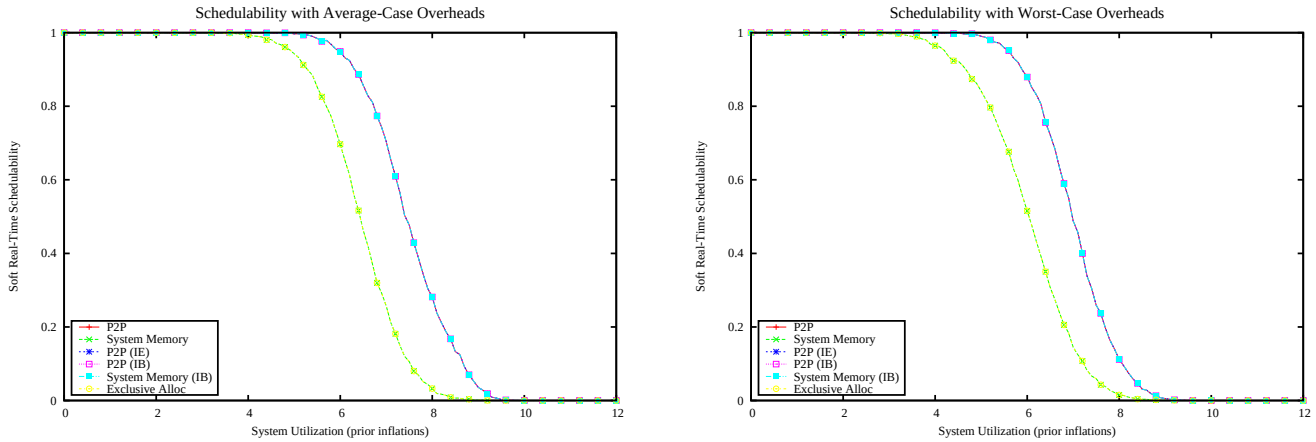

Figure 5801: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

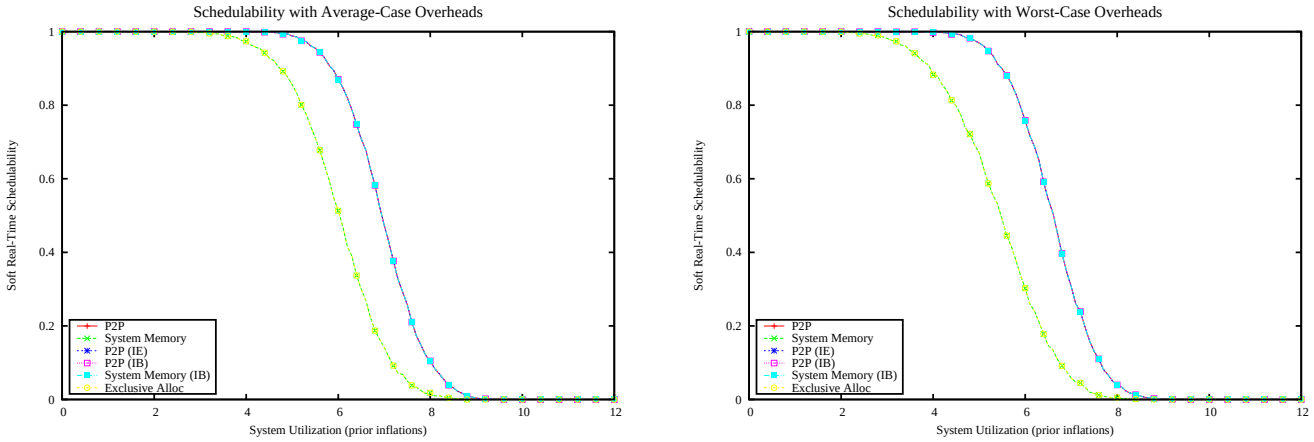

Figure 5802: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

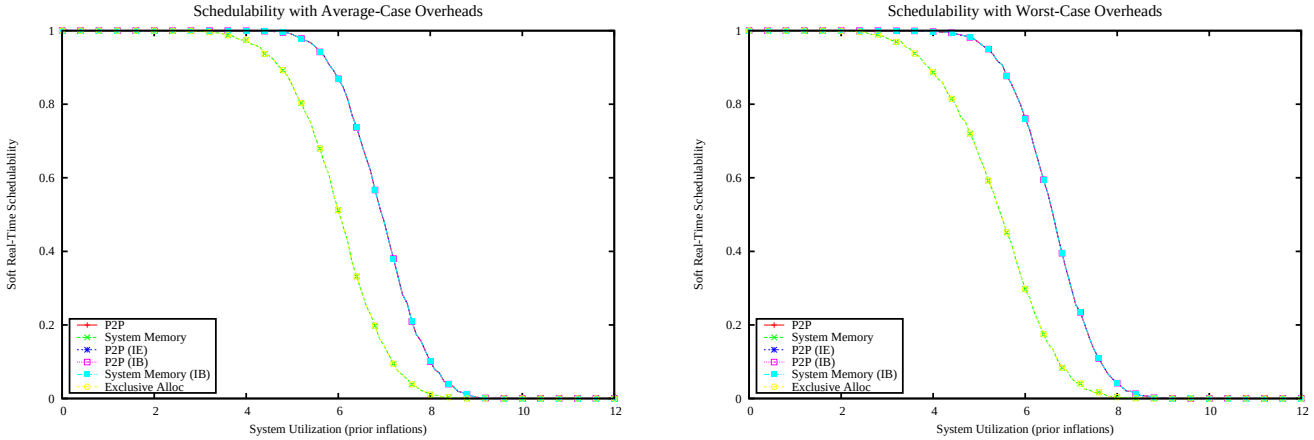

Figure 5803: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

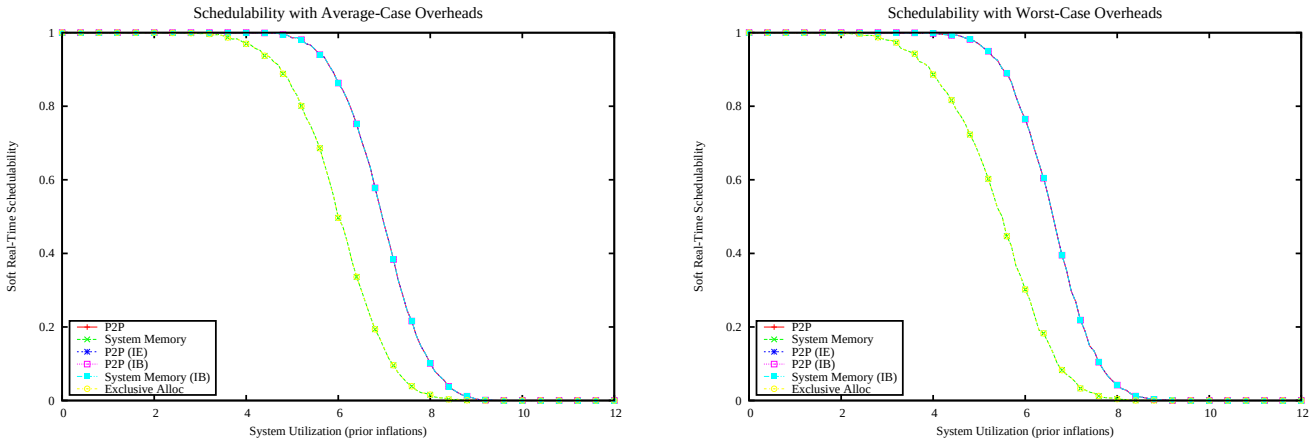

Figure 5804: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

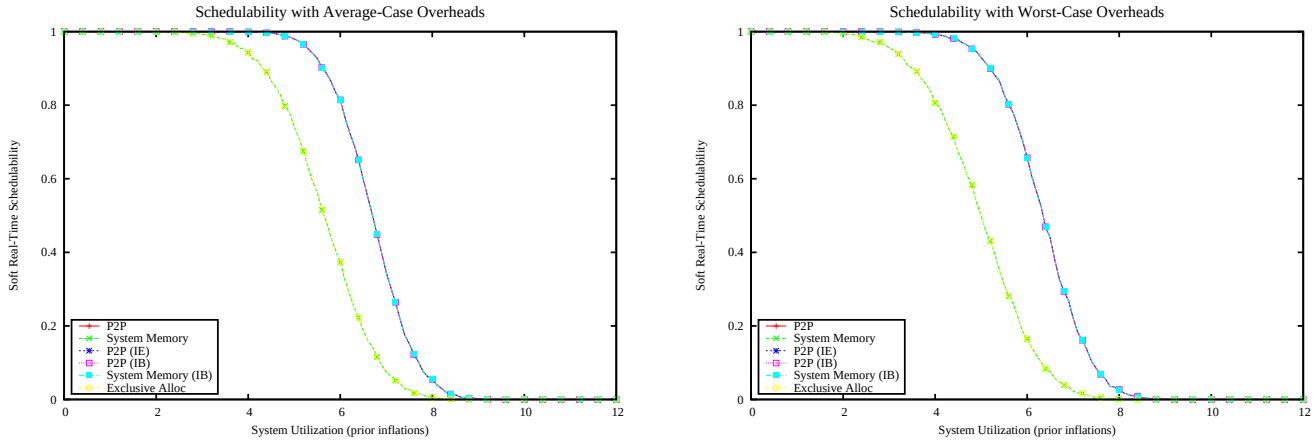

Figure 5805: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

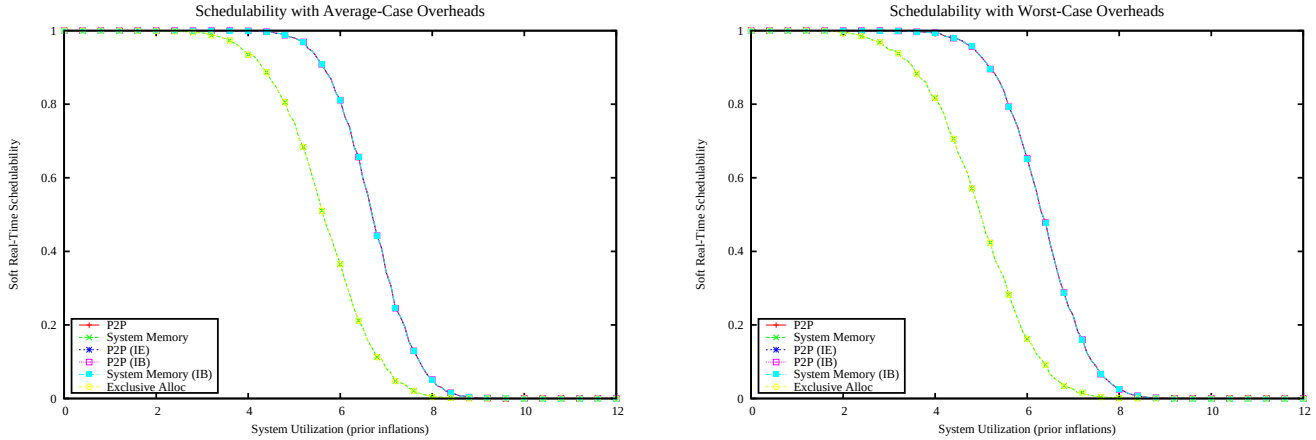

Figure 5806: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

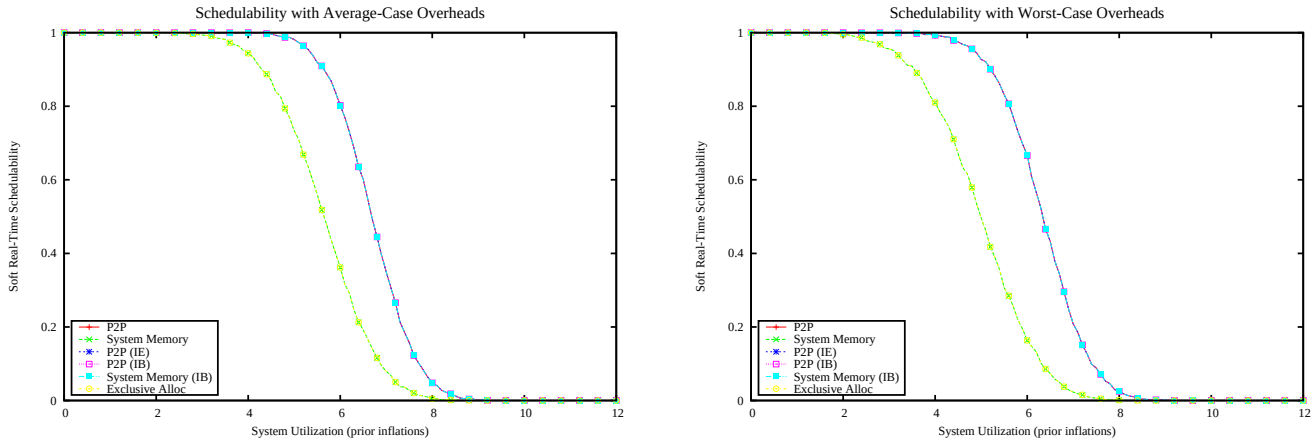

Figure 5807: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

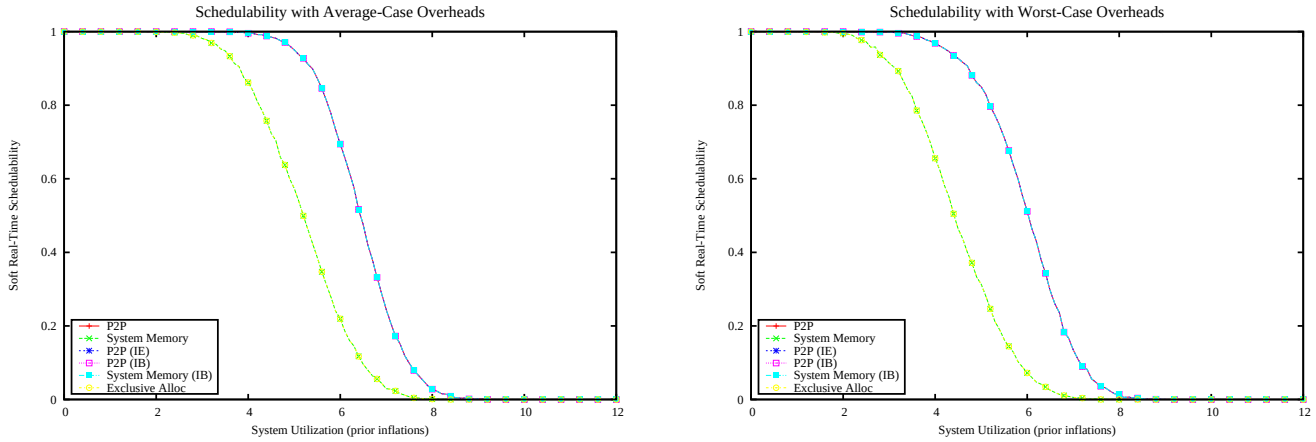

Figure 5808: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

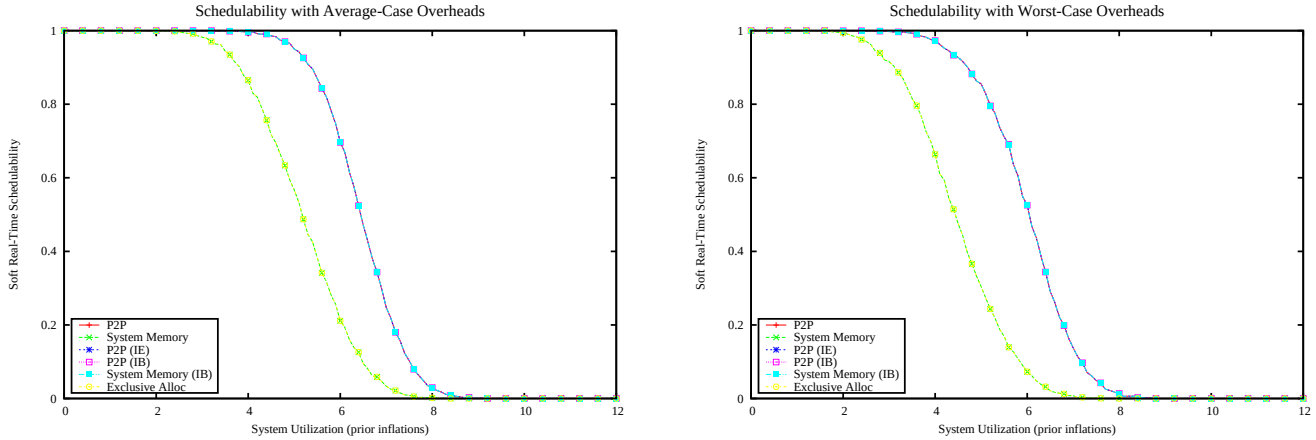

Figure 5809: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

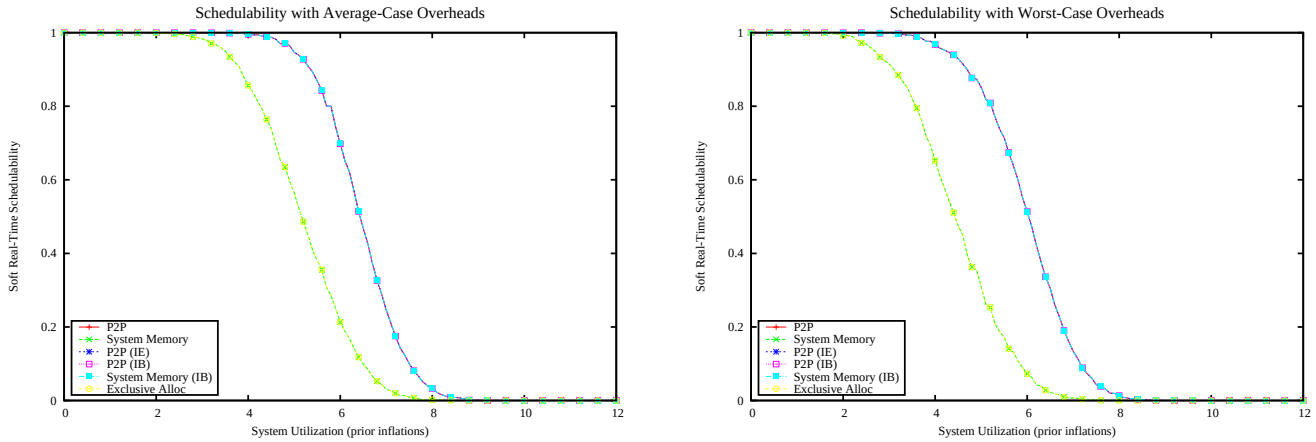

Figure 5810: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

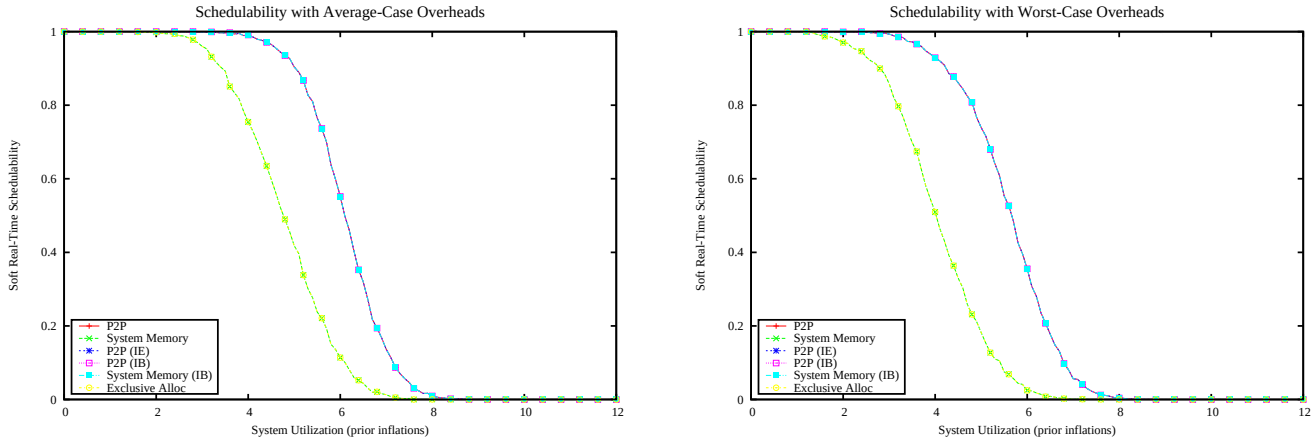

Figure 5811: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

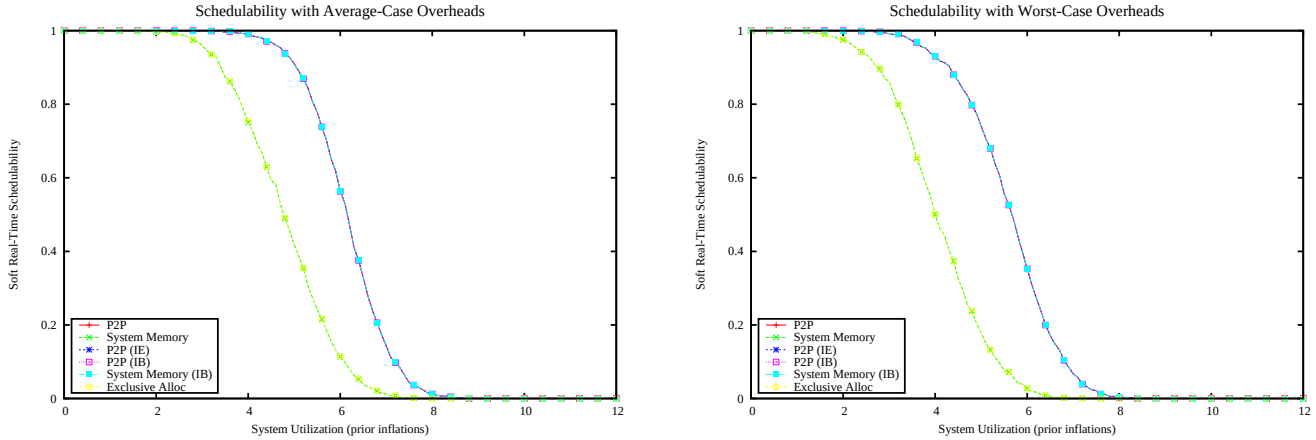

Figure 5812: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

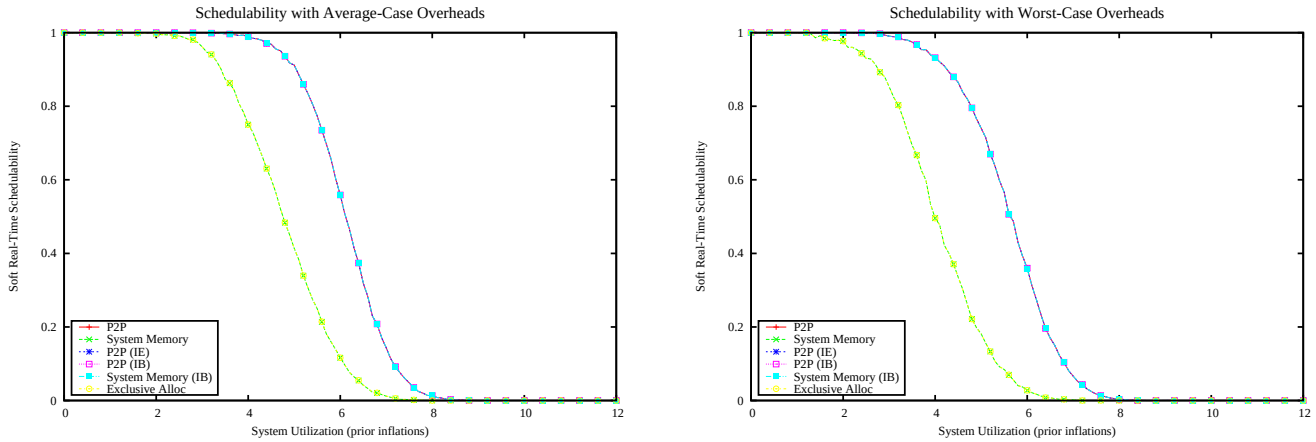

Figure 5813: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

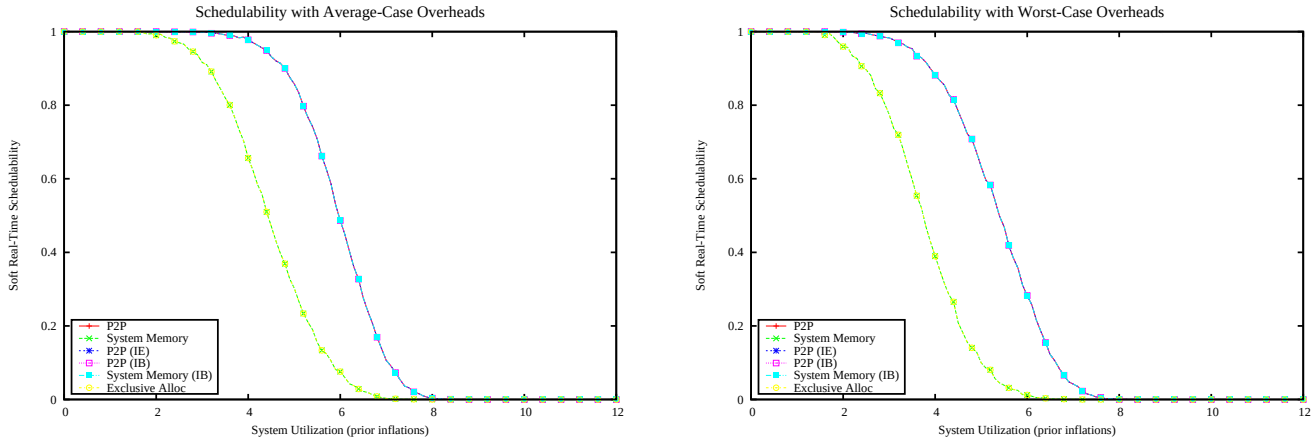

Figure 5814: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

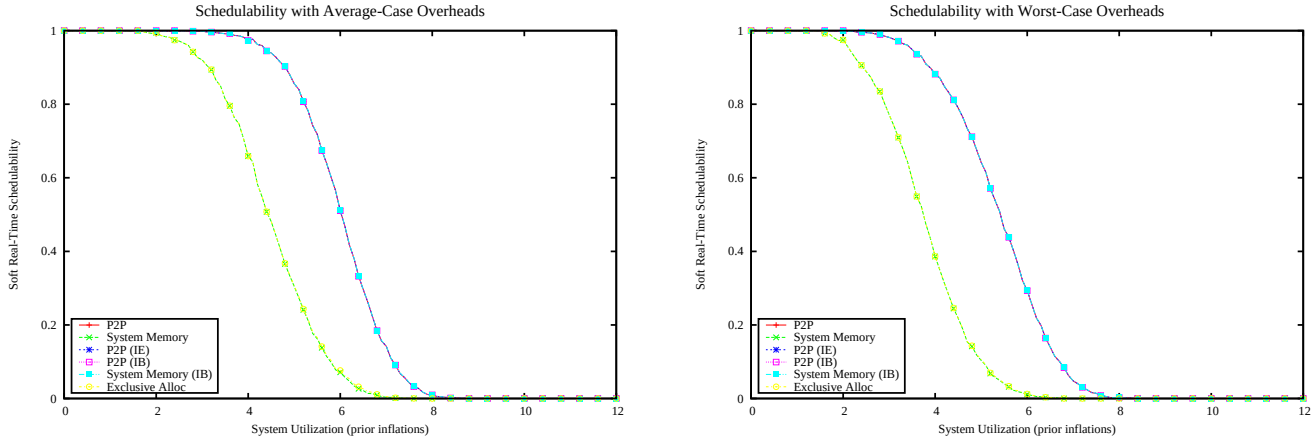

Figure 5815: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

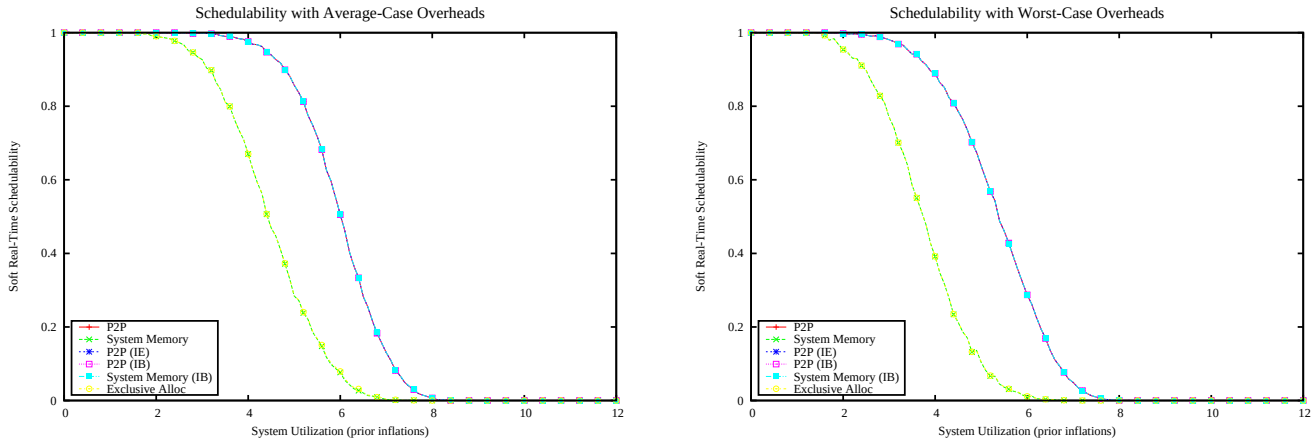

Figure 5816: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

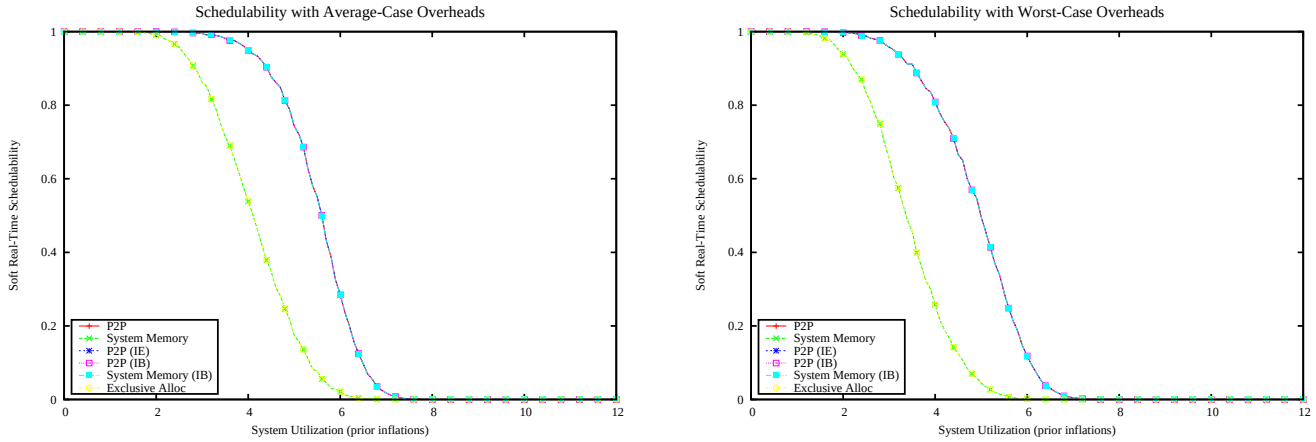

Figure 5817: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

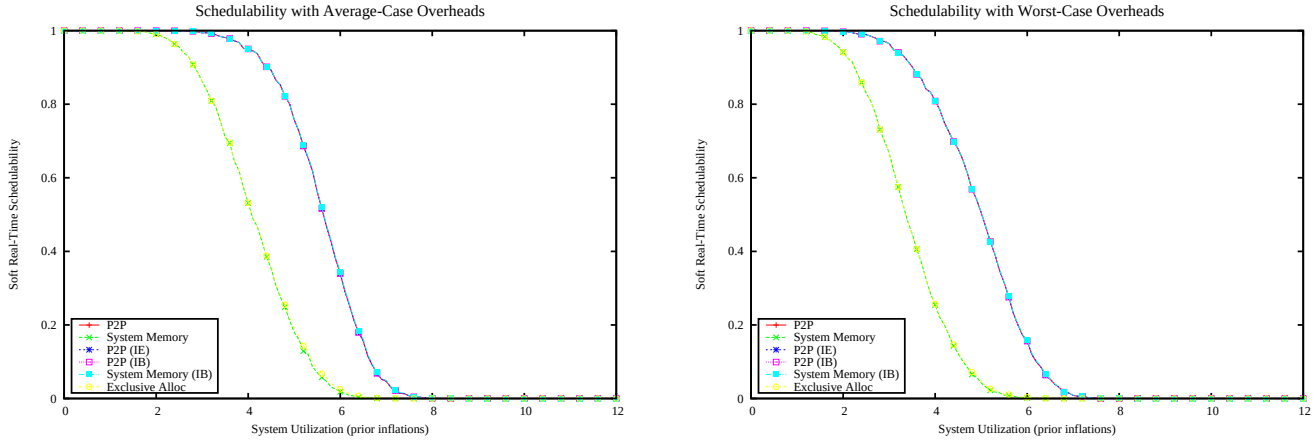

Figure 5818: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

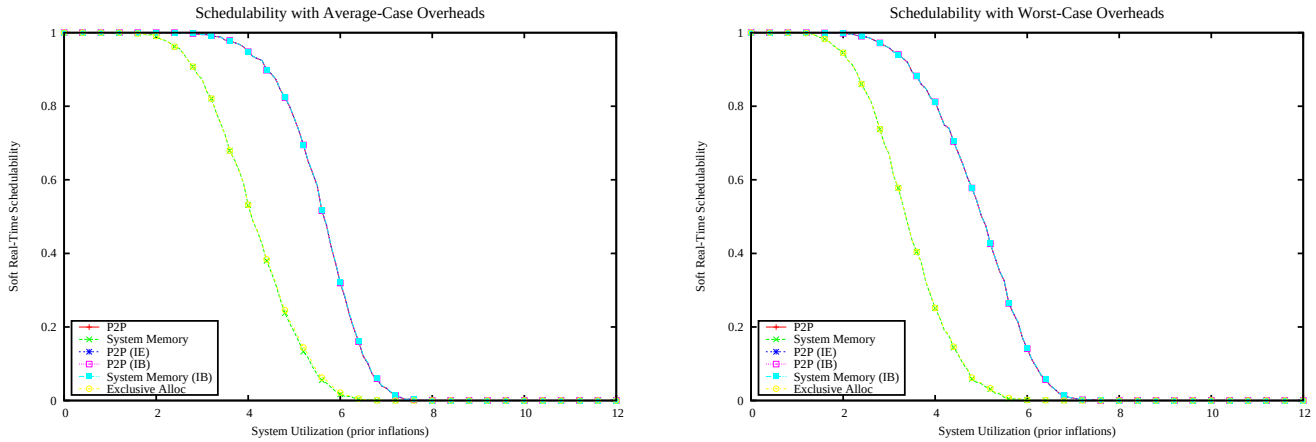

Figure 5819: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

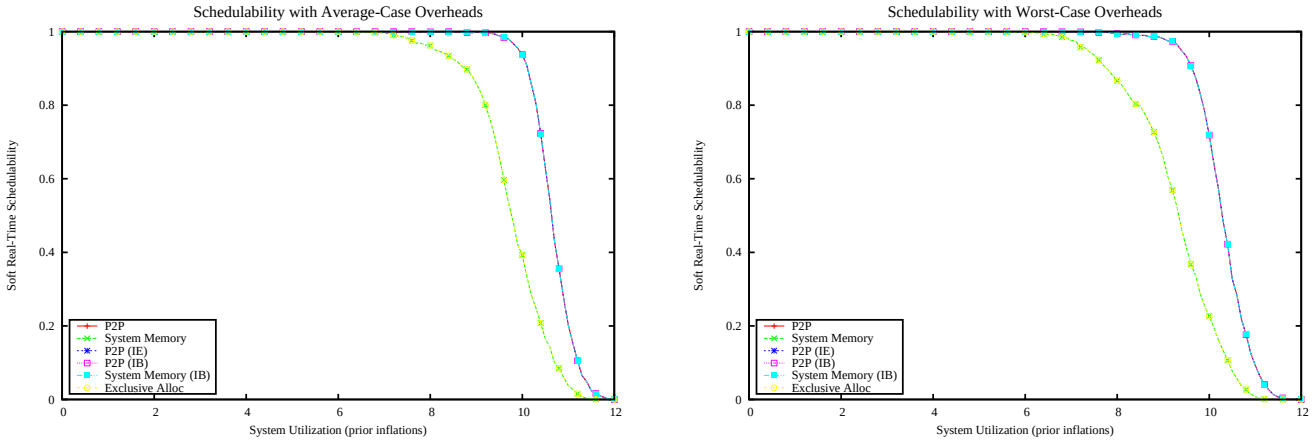

Figure 5820: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

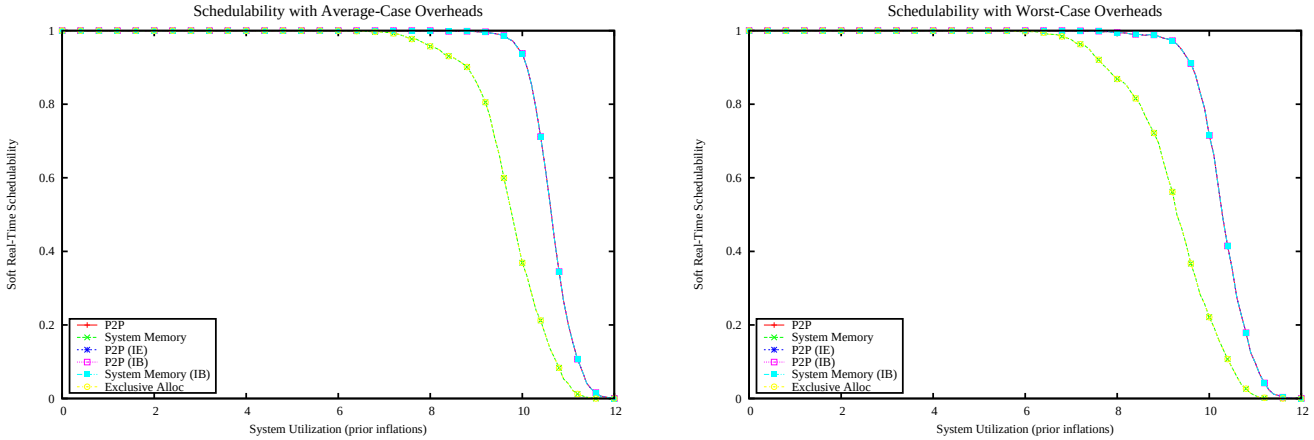

Figure 5821: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

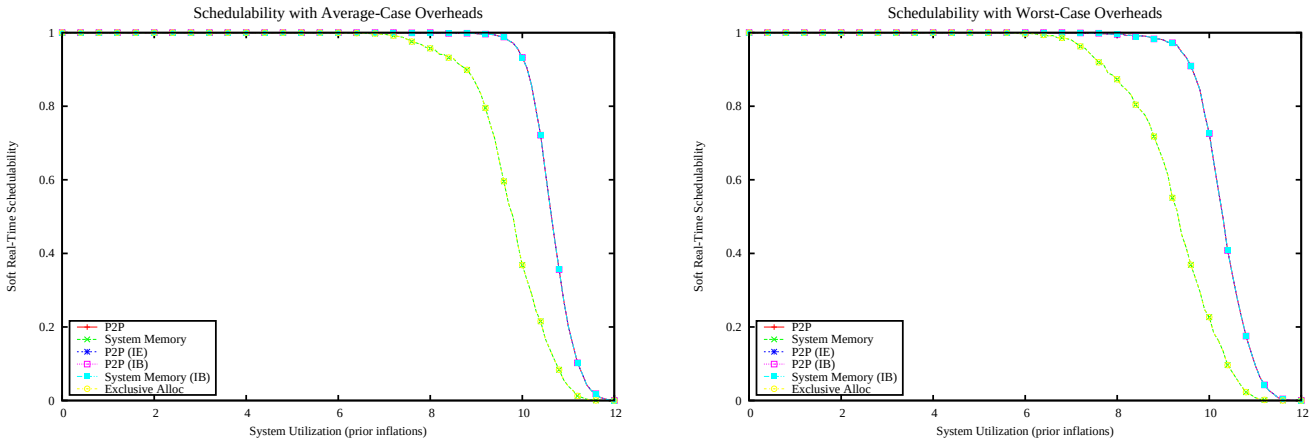

Figure 5822: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

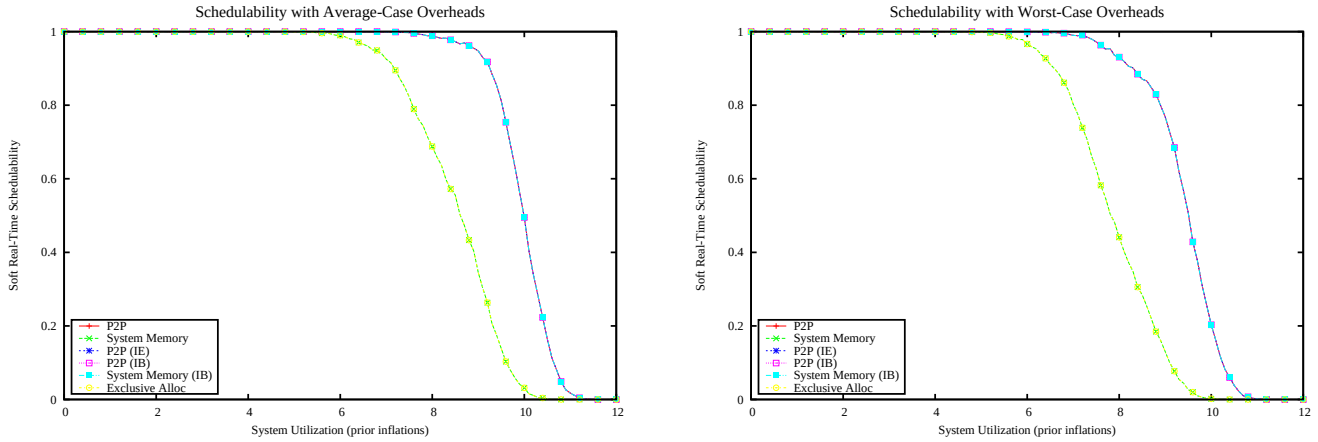

Figure 5823: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

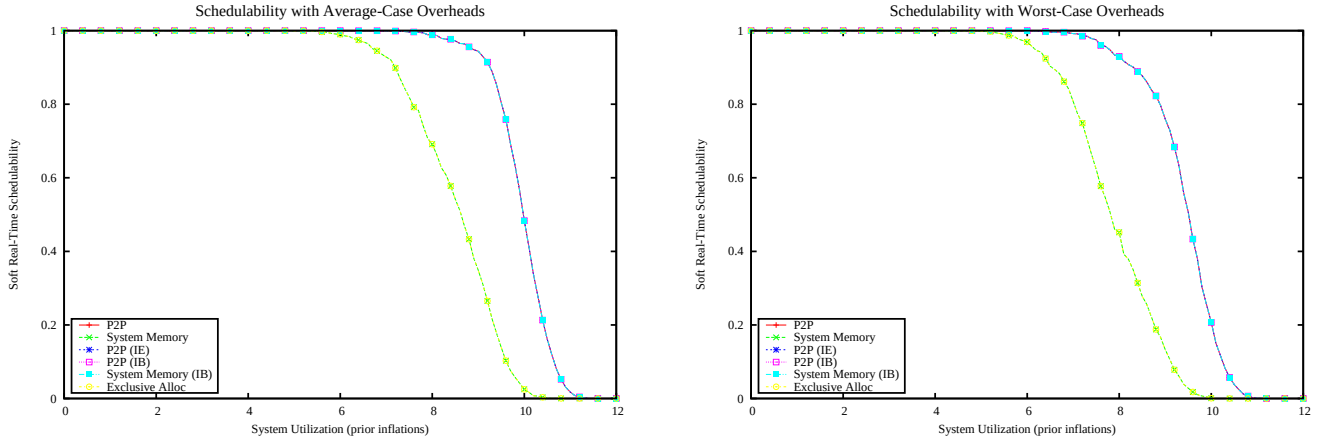

Figure 5824: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

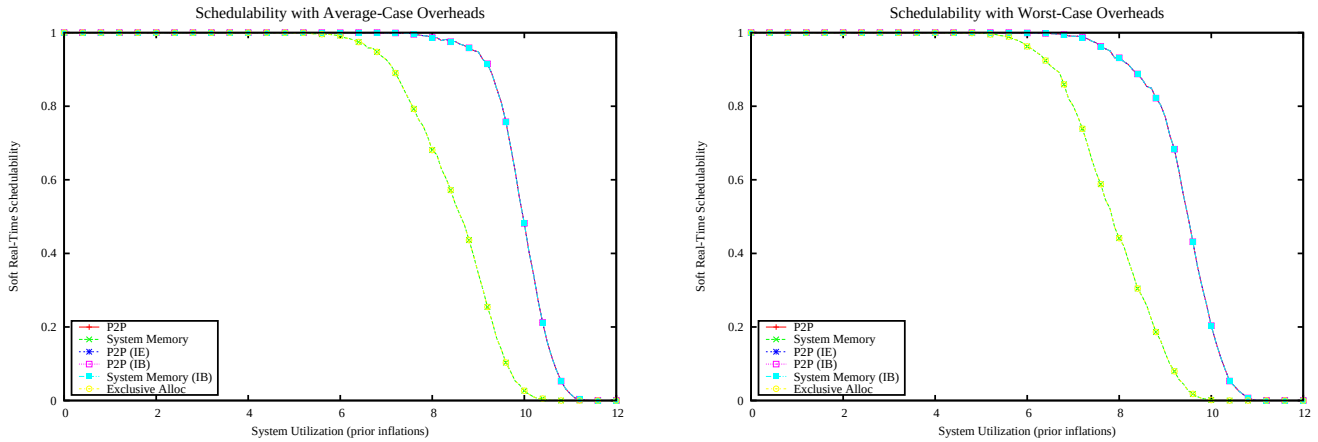

Figure 5825: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

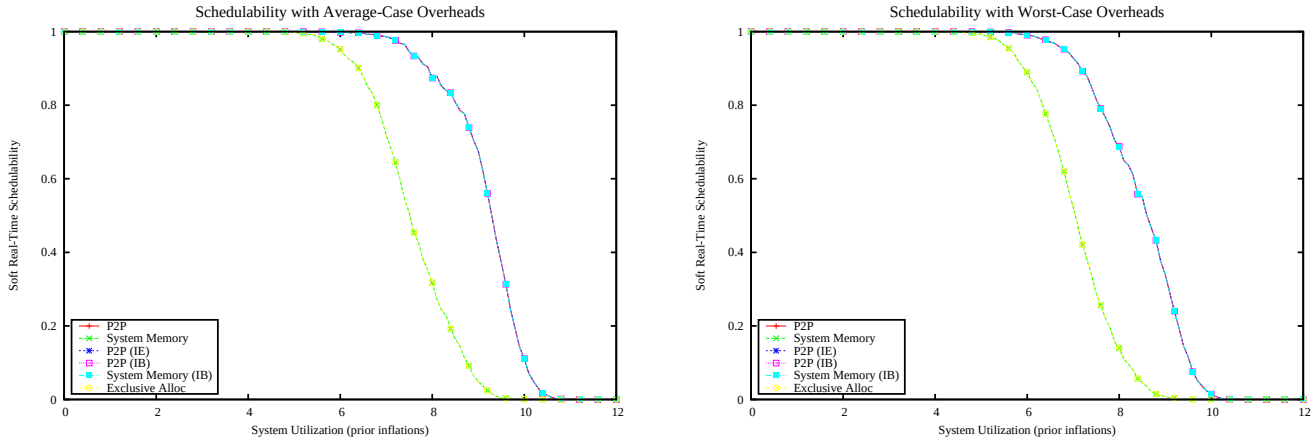

Figure 5826: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

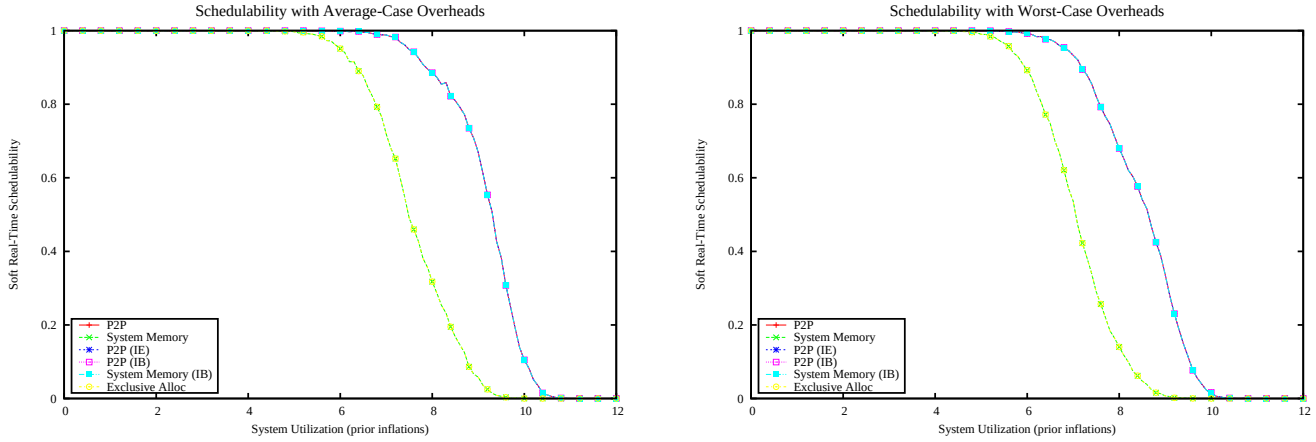

Figure 5827: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

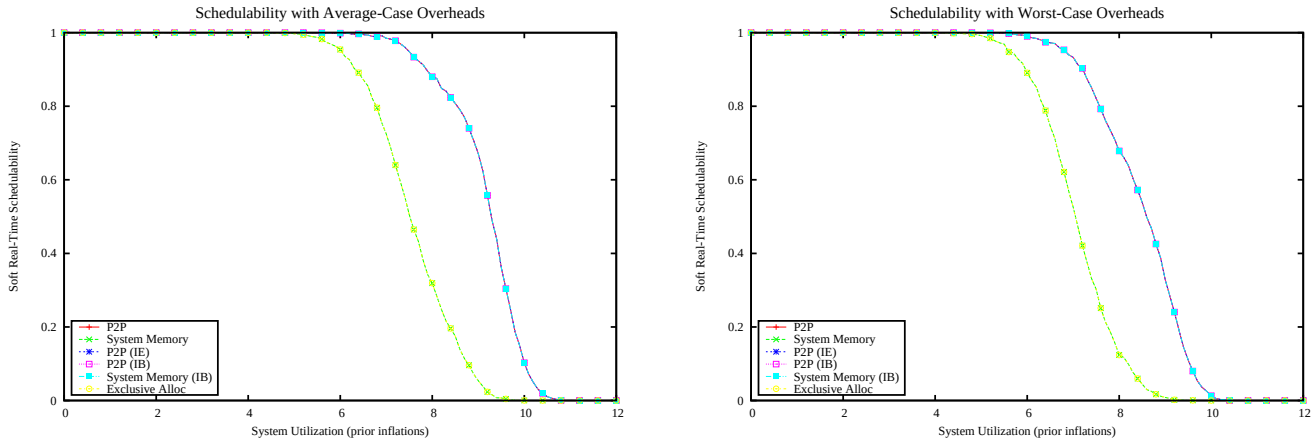

Figure 5828: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

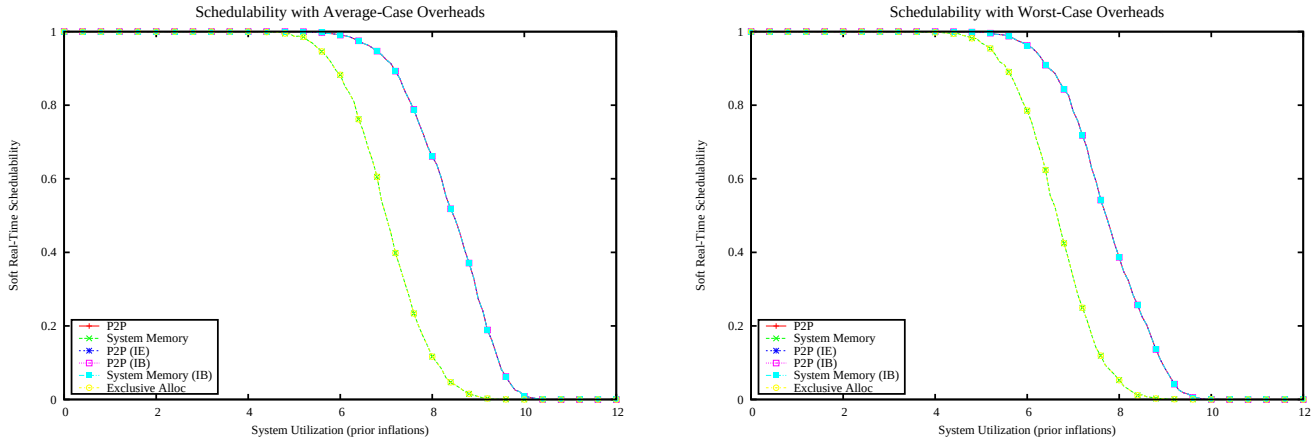

Figure 5829: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

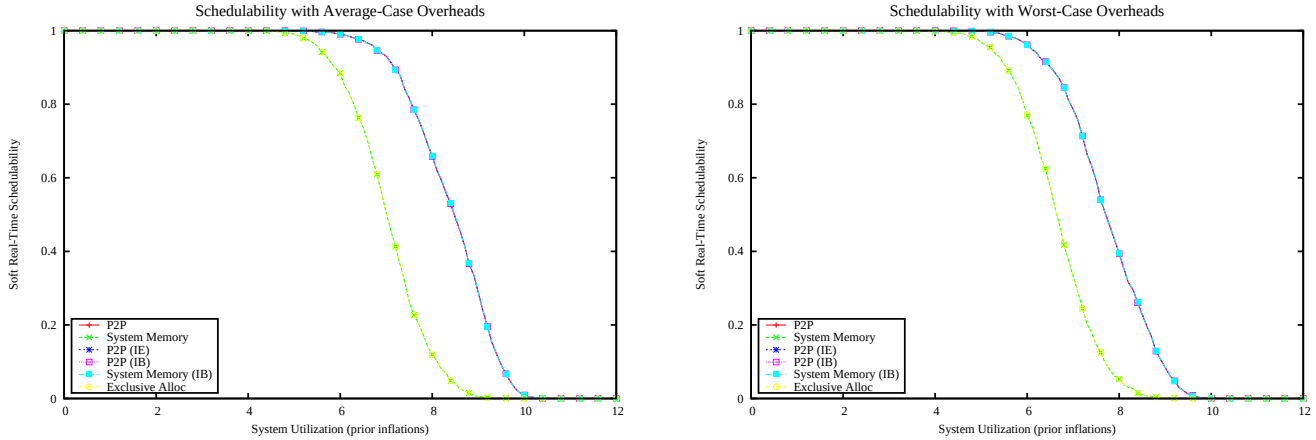

Figure 5830: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

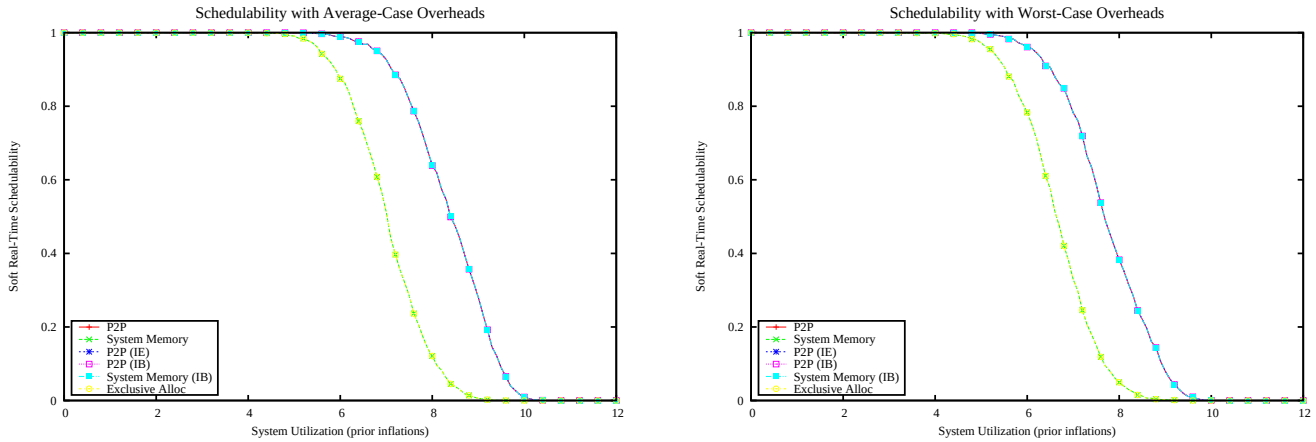

Figure 5831: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

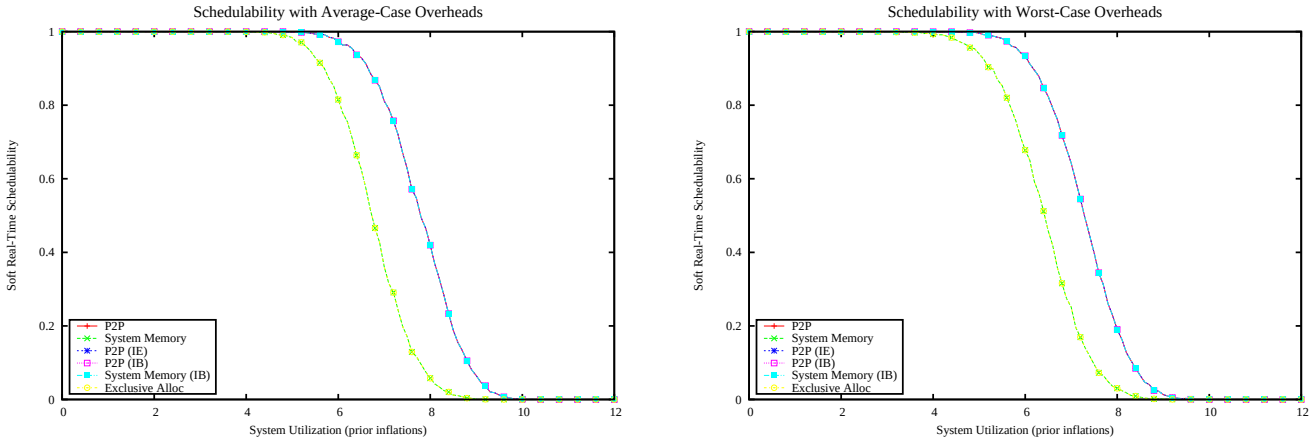

Figure 5832: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

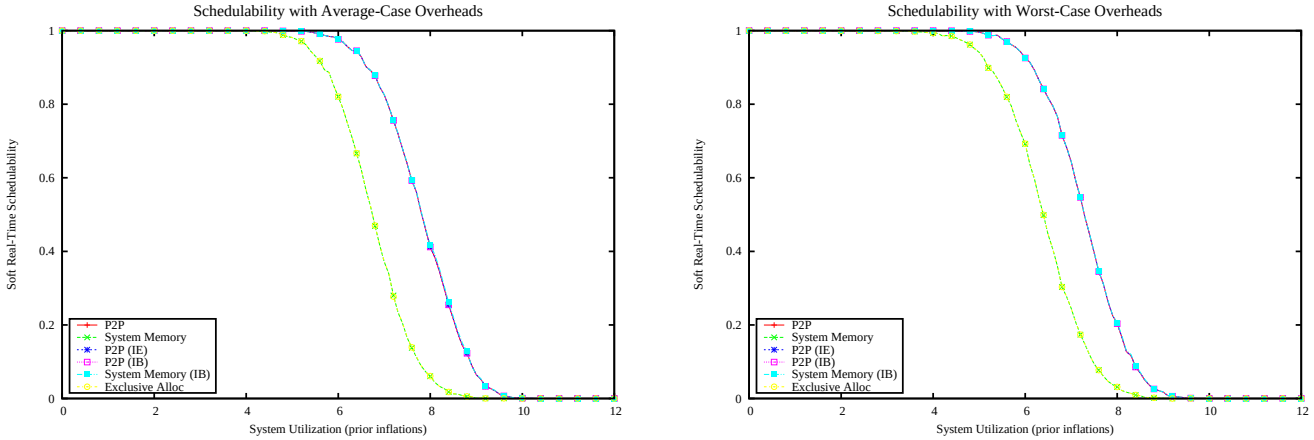

Figure 5833: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

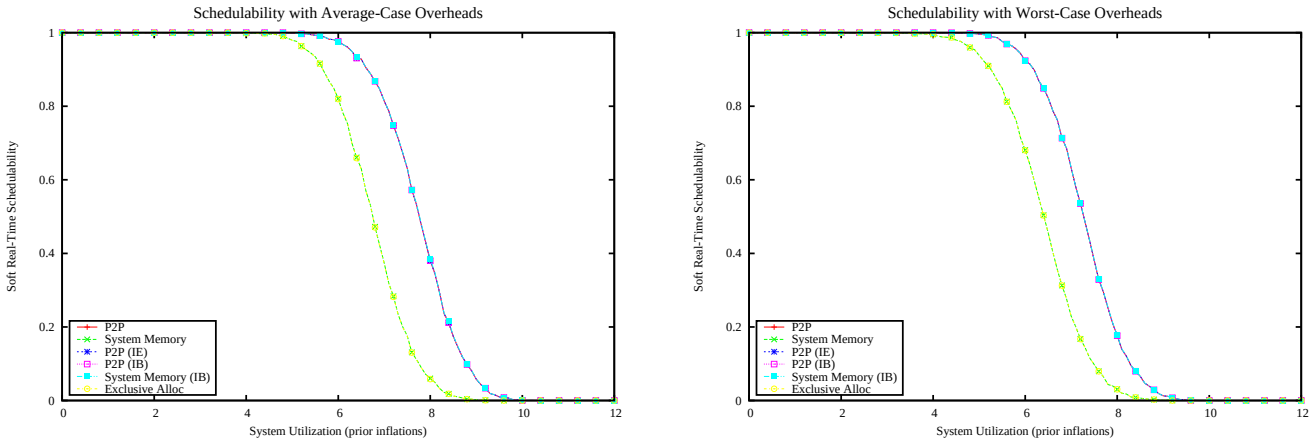

Figure 5834: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

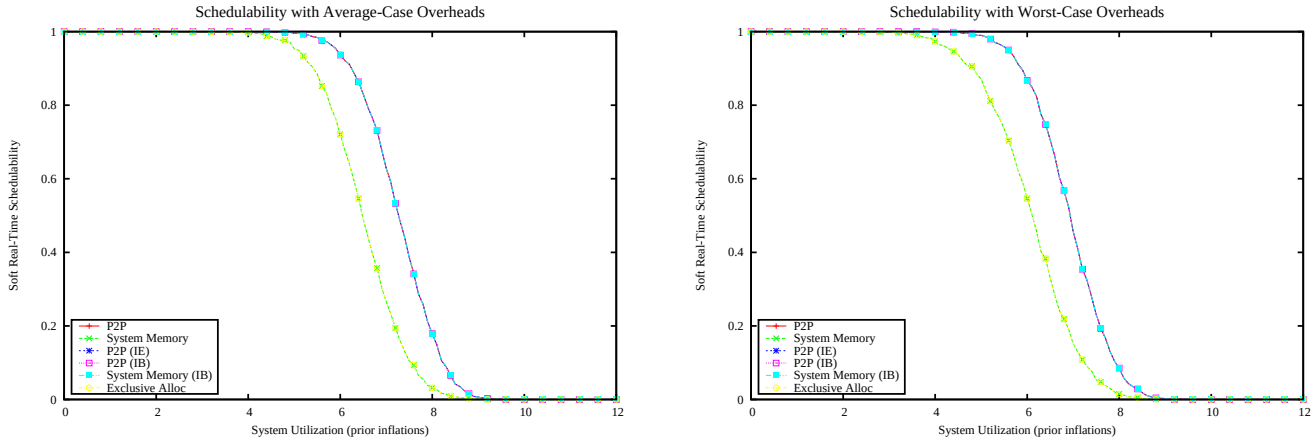

Figure 5835: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

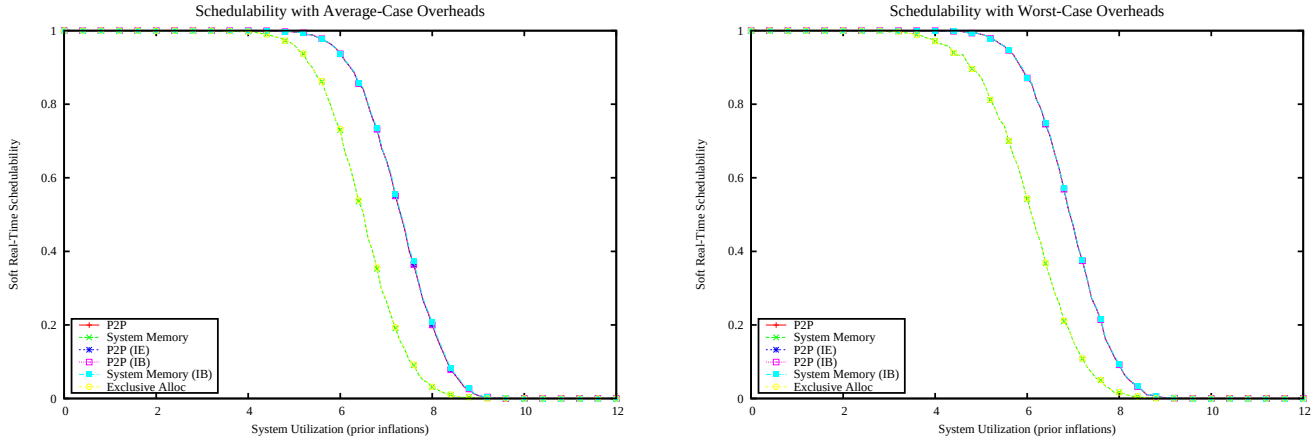

Figure 5836: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

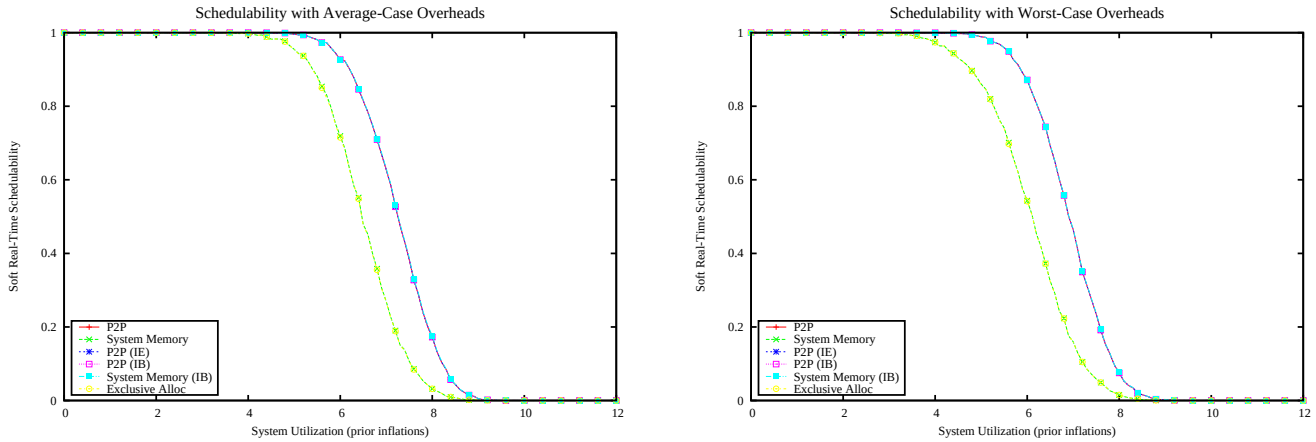

Figure 5837: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

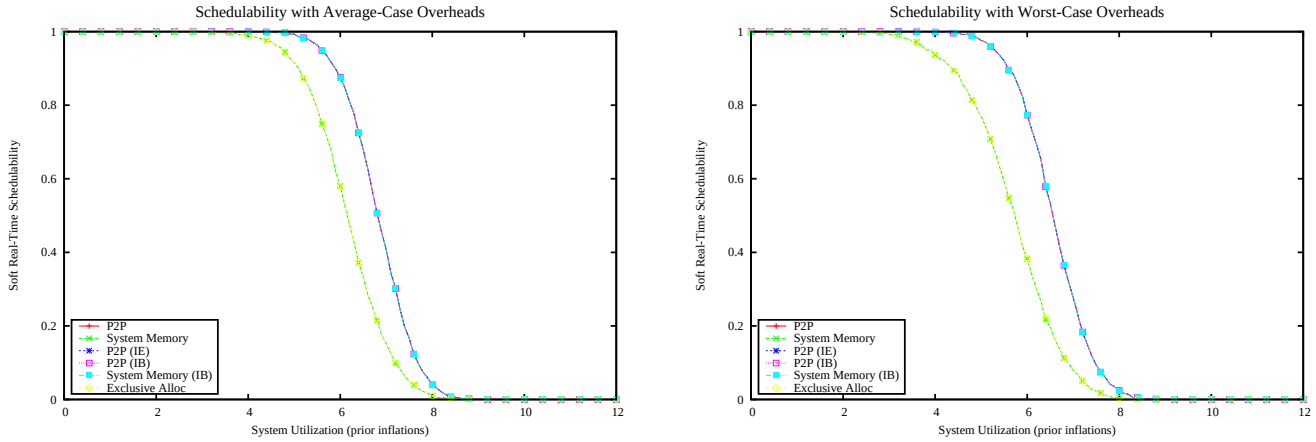

Figure 5838: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

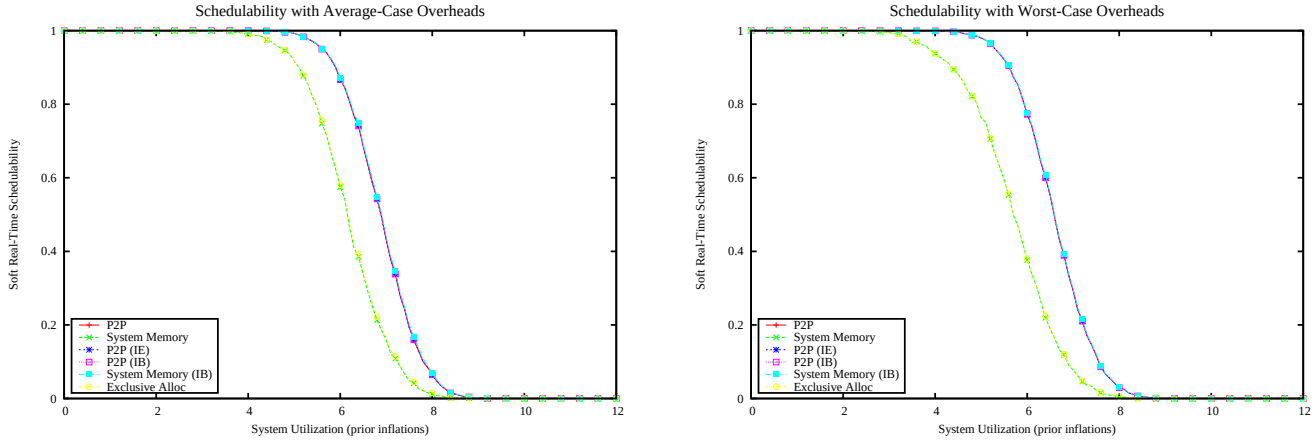

Figure 5839: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

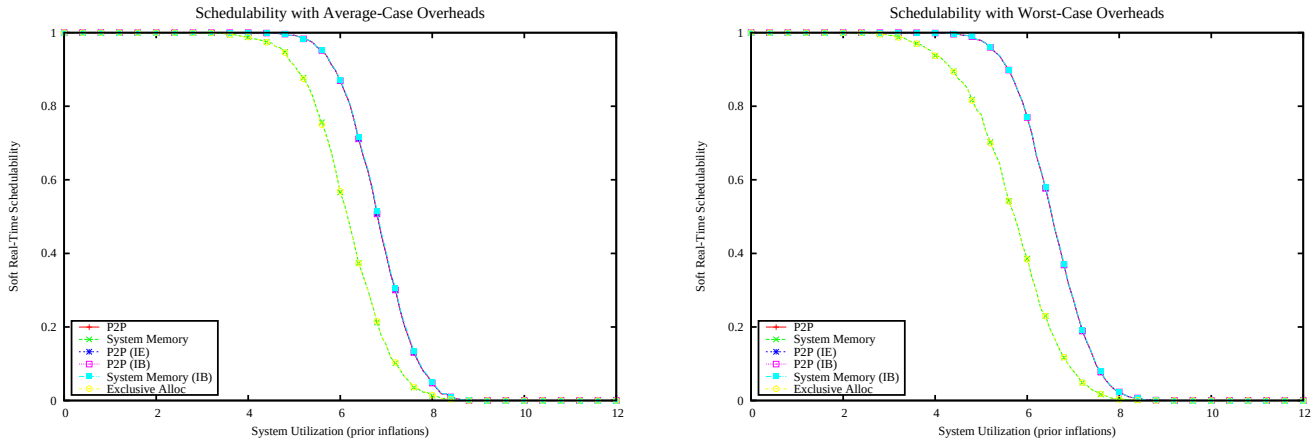

Figure 5840: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

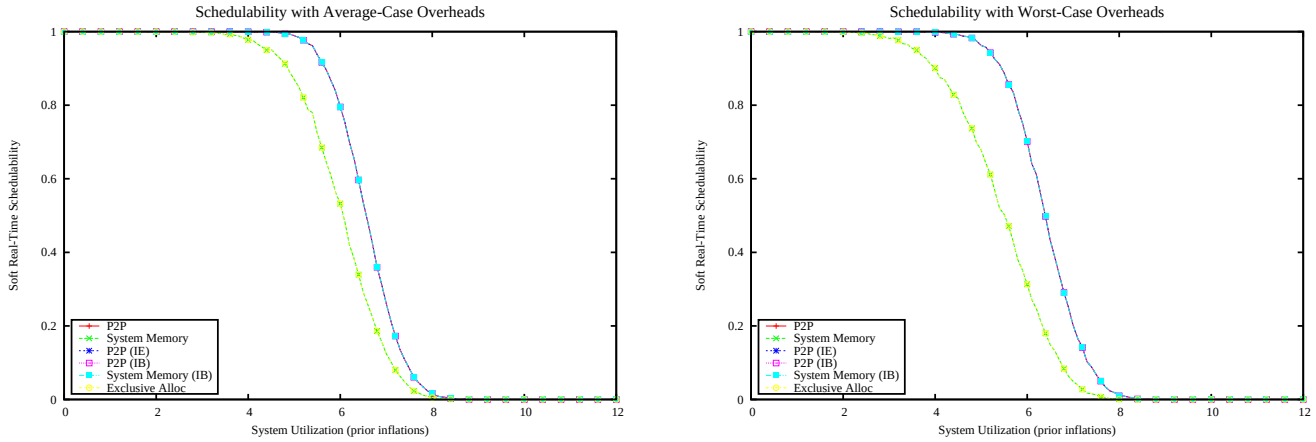

Figure 5841: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

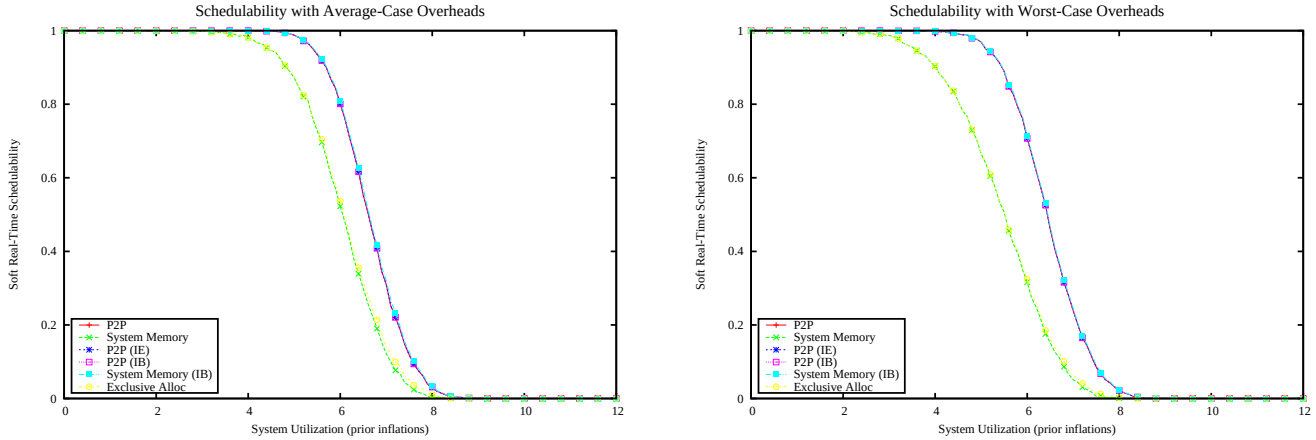

Figure 5842: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

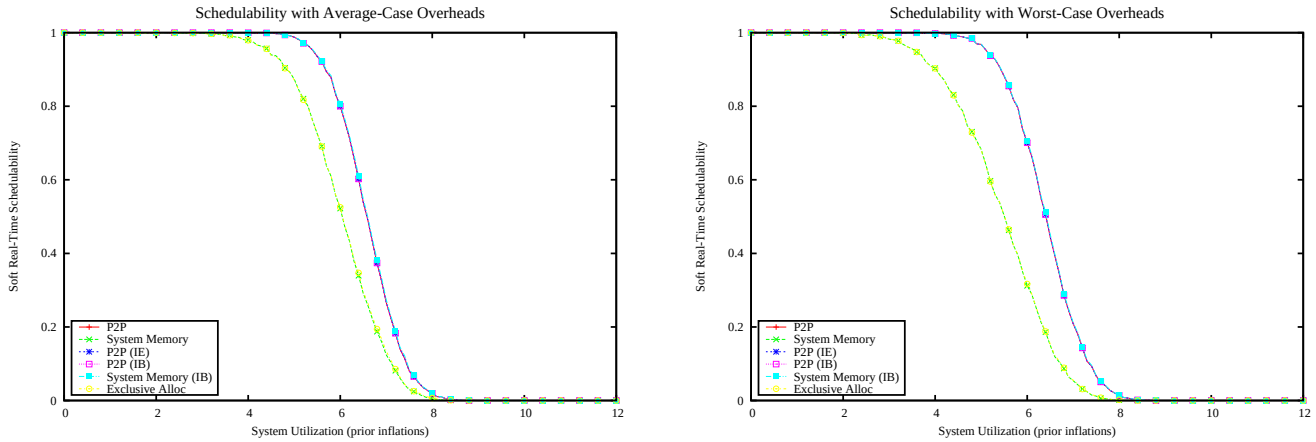

Figure 5843: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

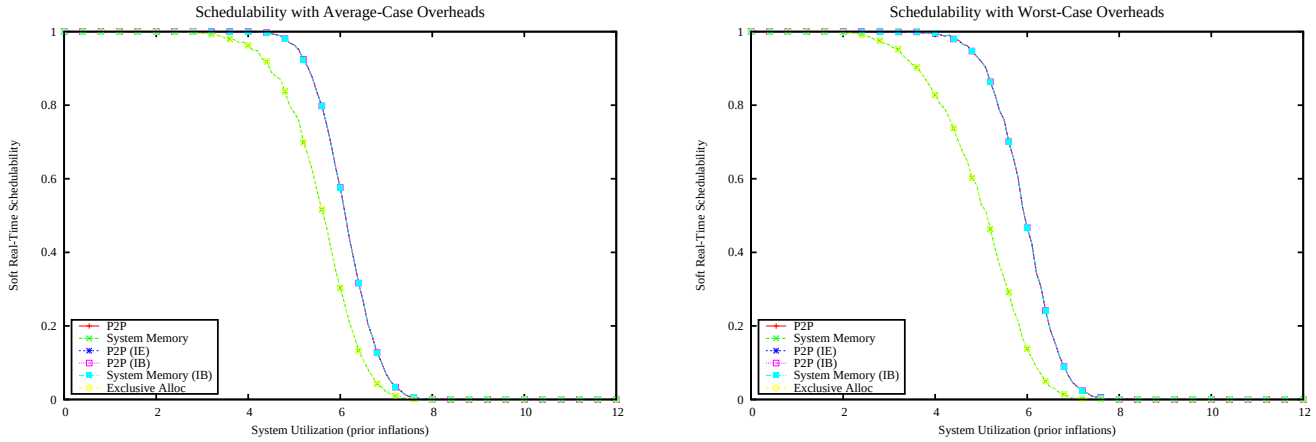

Figure 5844: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

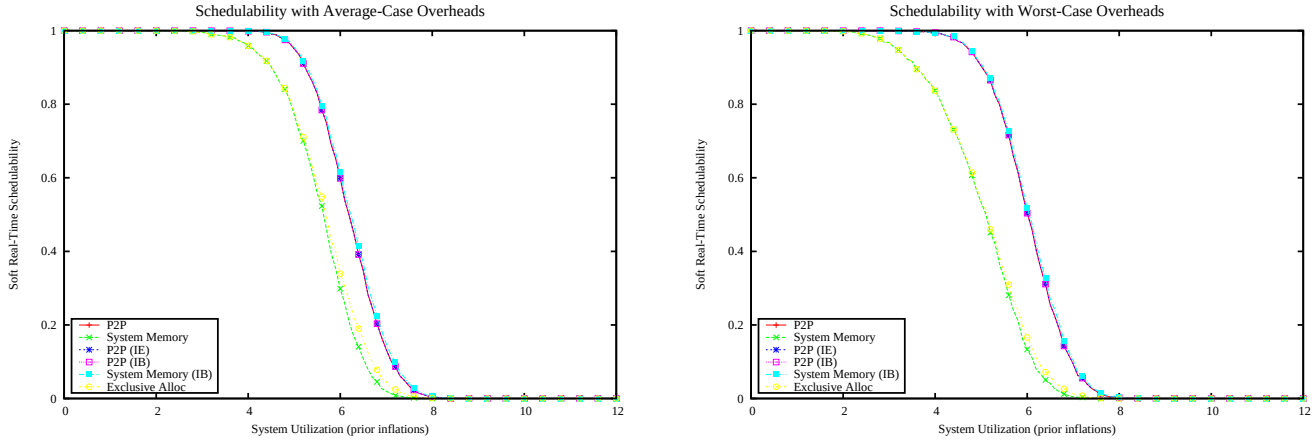

Figure 5845: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

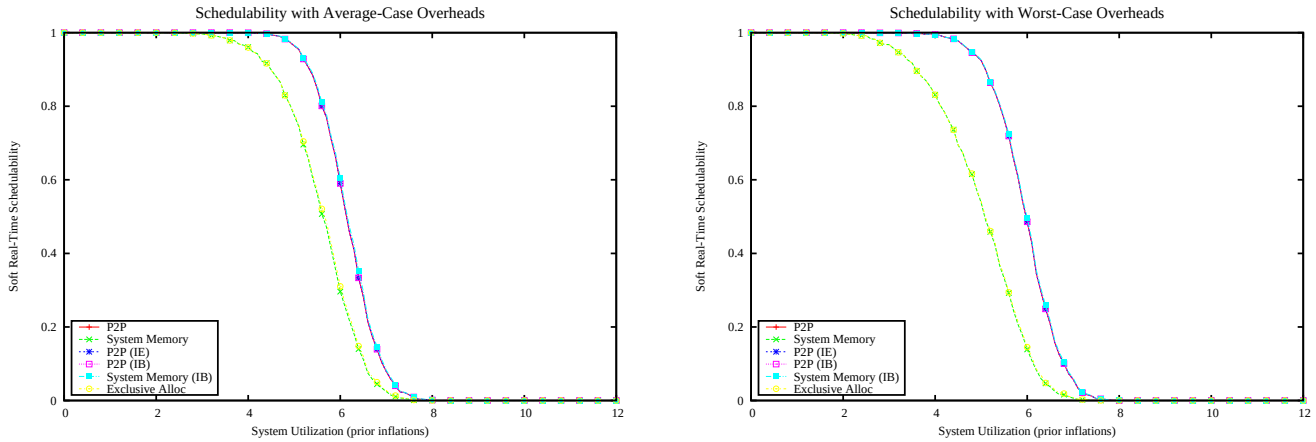

Figure 5846: 2x6 CPU Clusters, 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

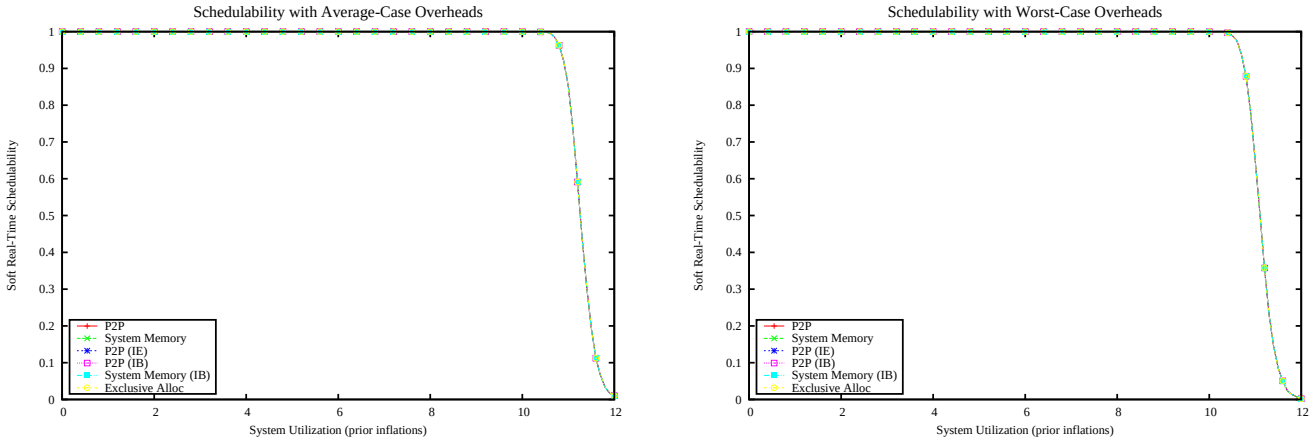

Figure 5847: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

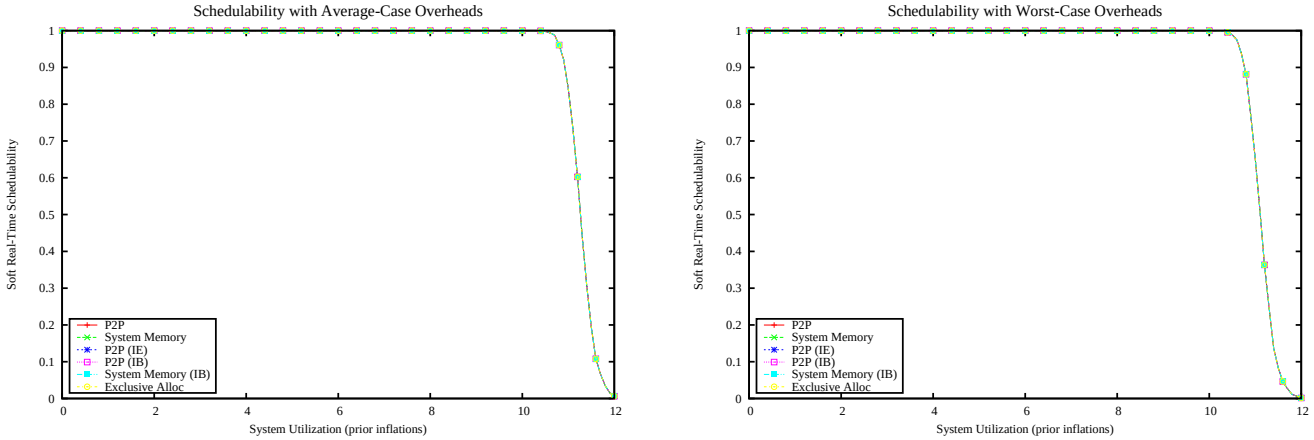

Figure 5848: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

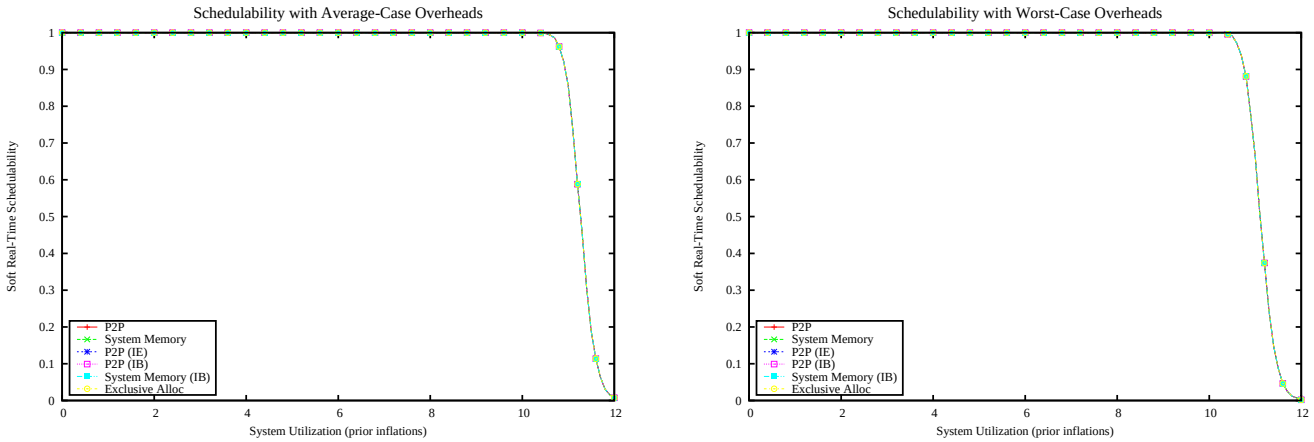

Figure 5849: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

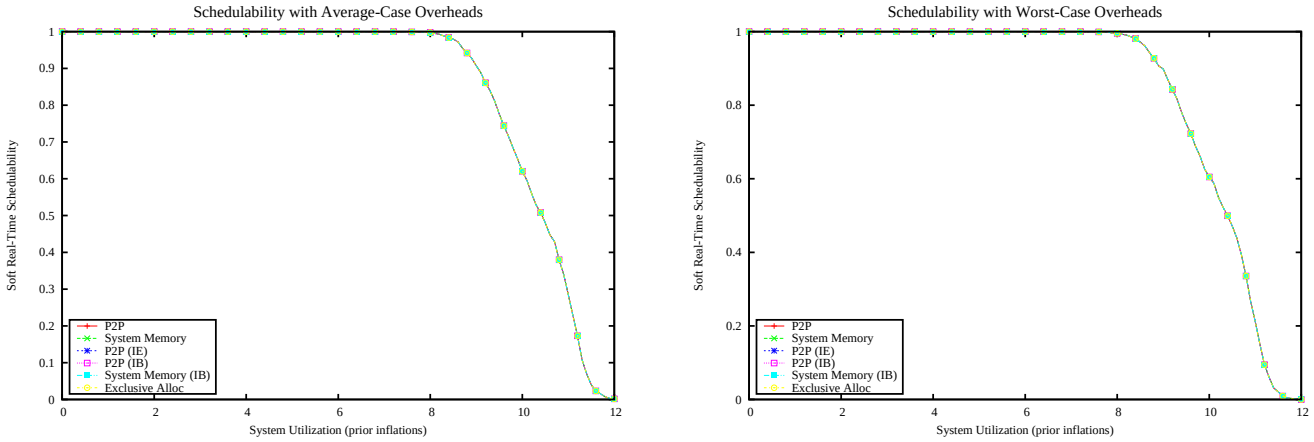

Figure 5850: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

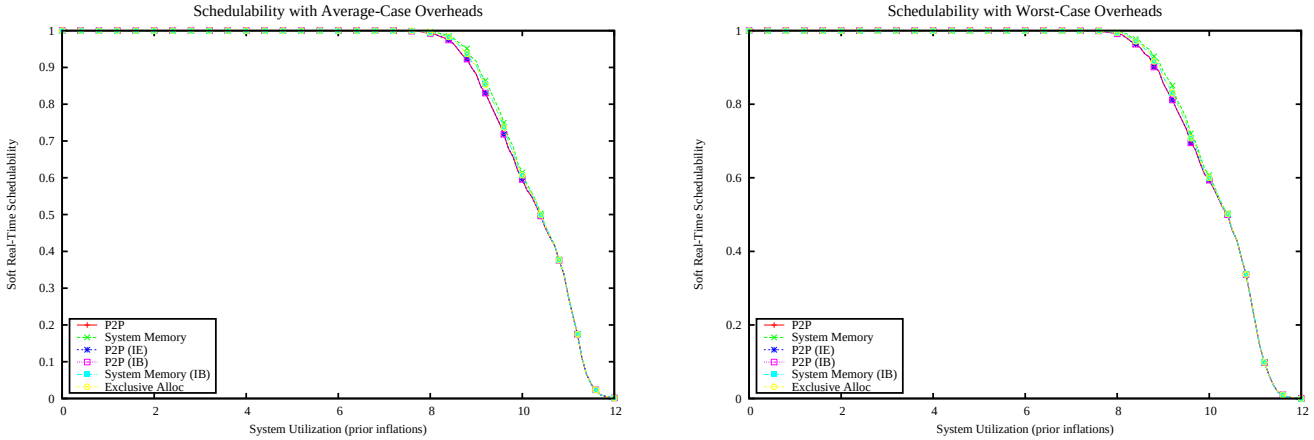

Figure 5851: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

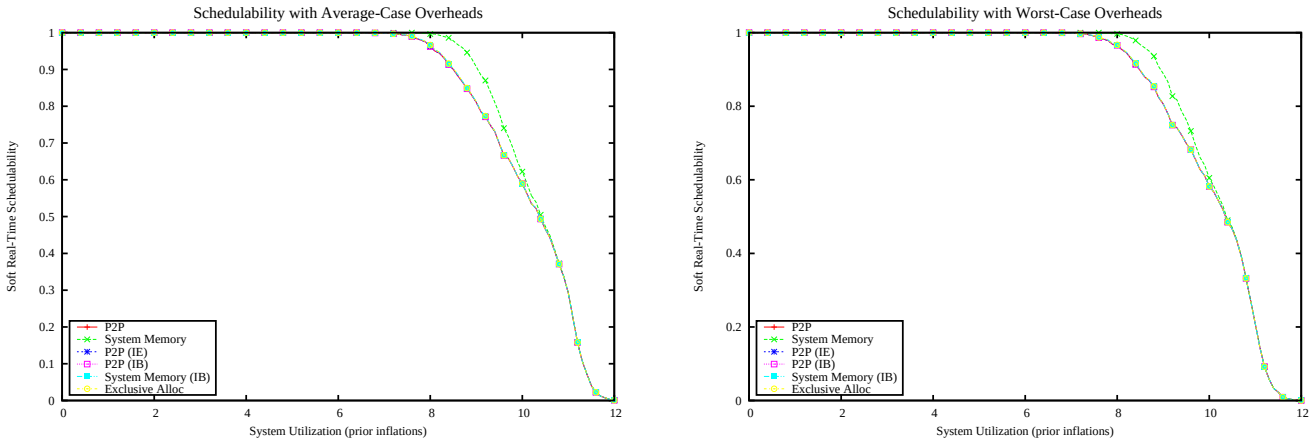

Figure 5852: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

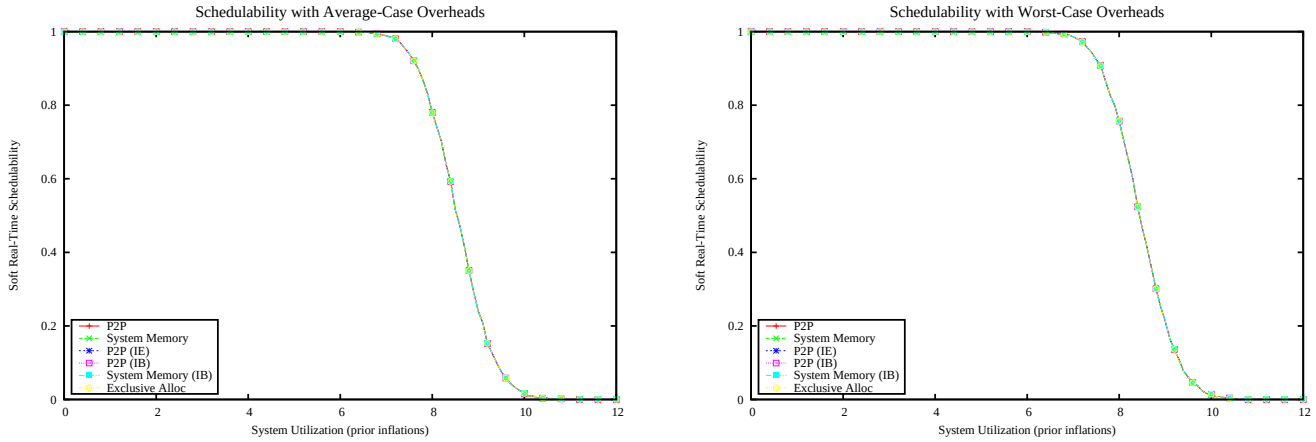

Figure 5853: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

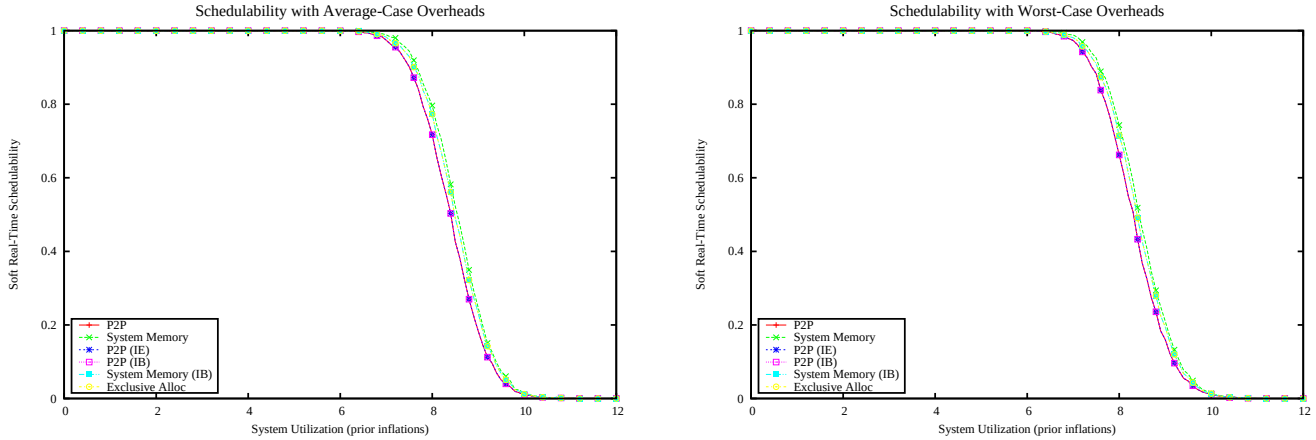

Figure 5854: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

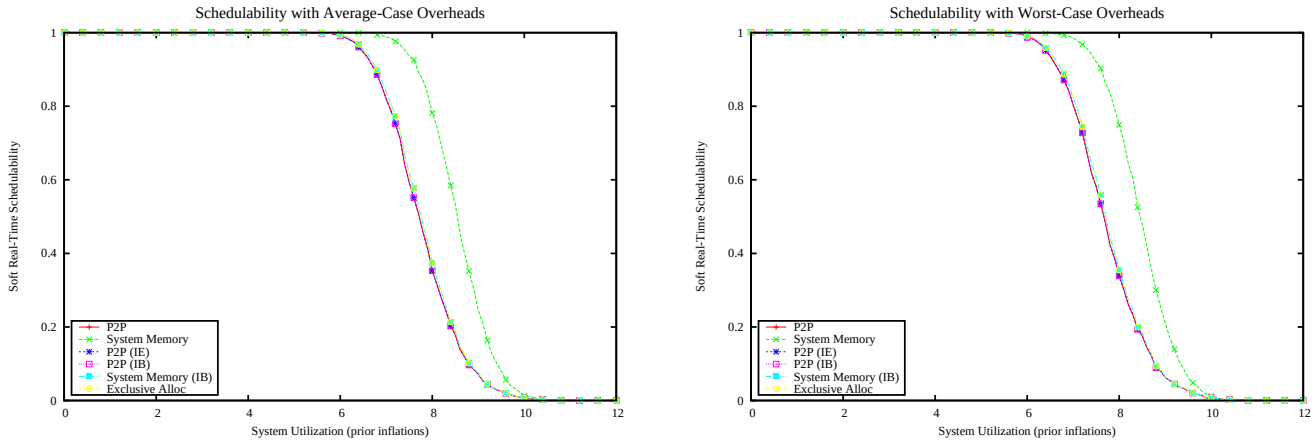

Figure 5855: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

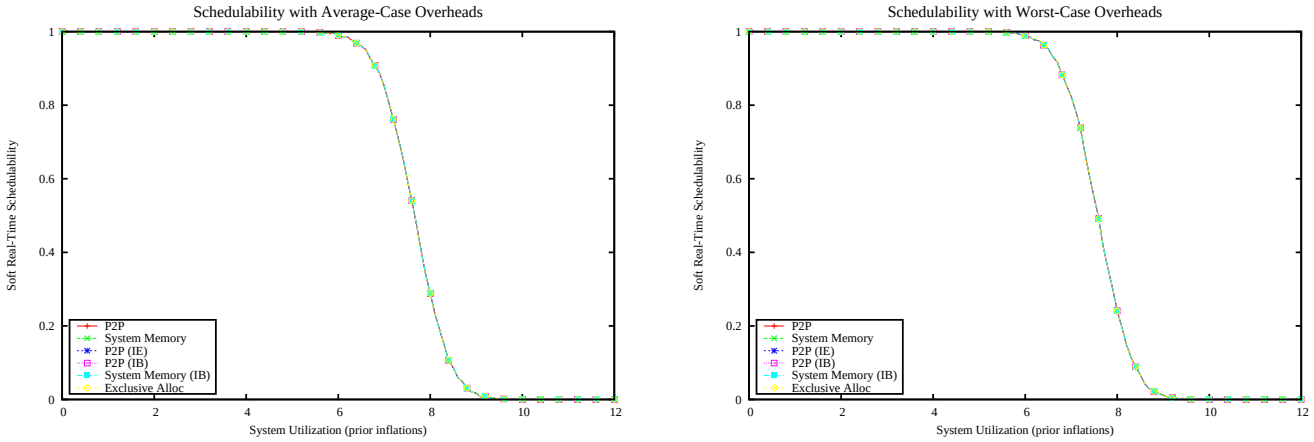

Figure 5856: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

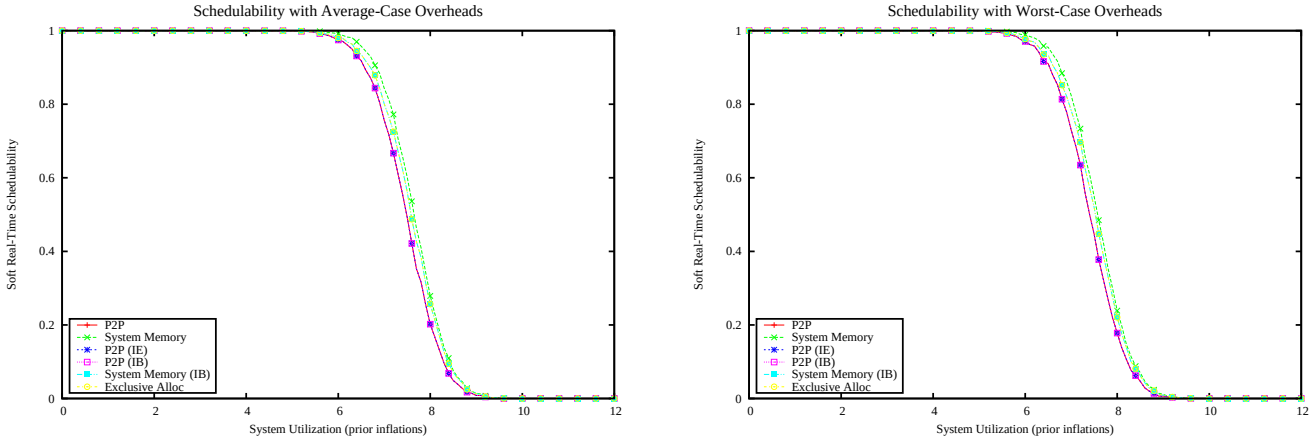

Figure 5857: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

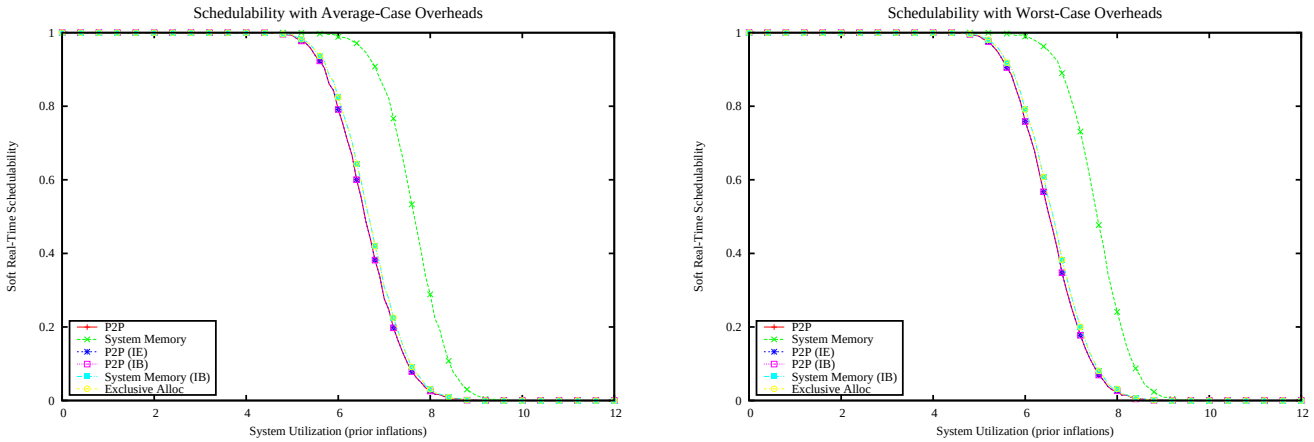

Figure 5858: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

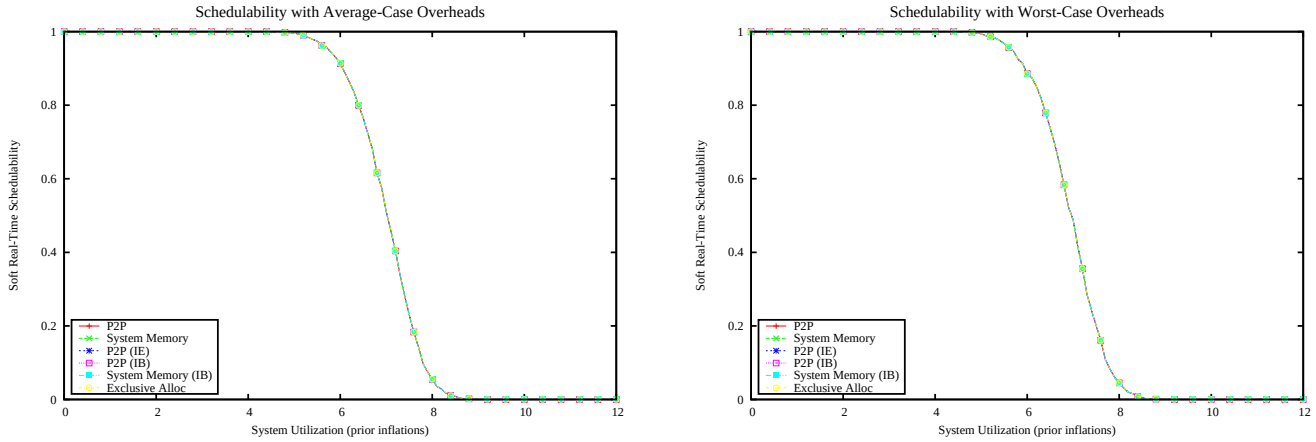

Figure 5859: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

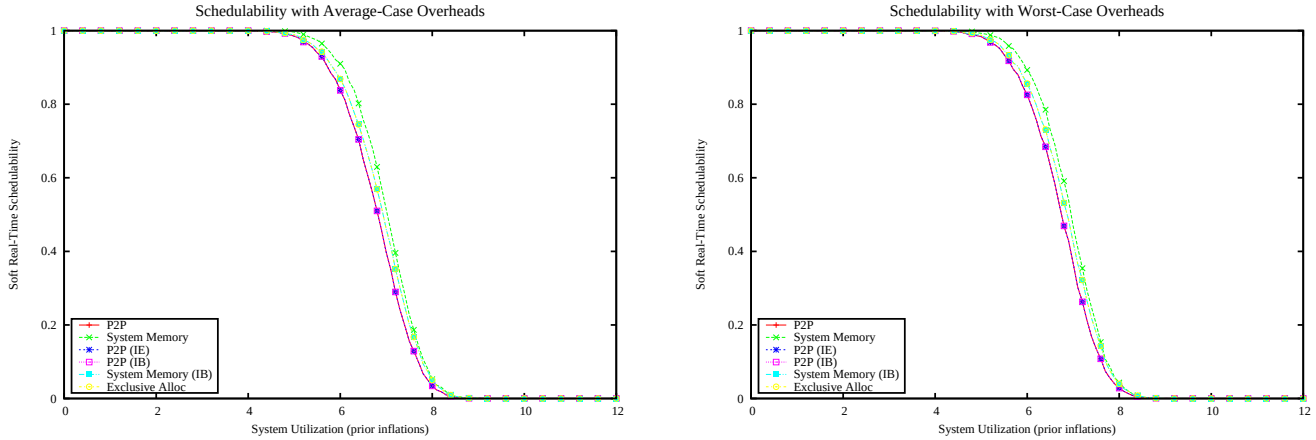

Figure 5860: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

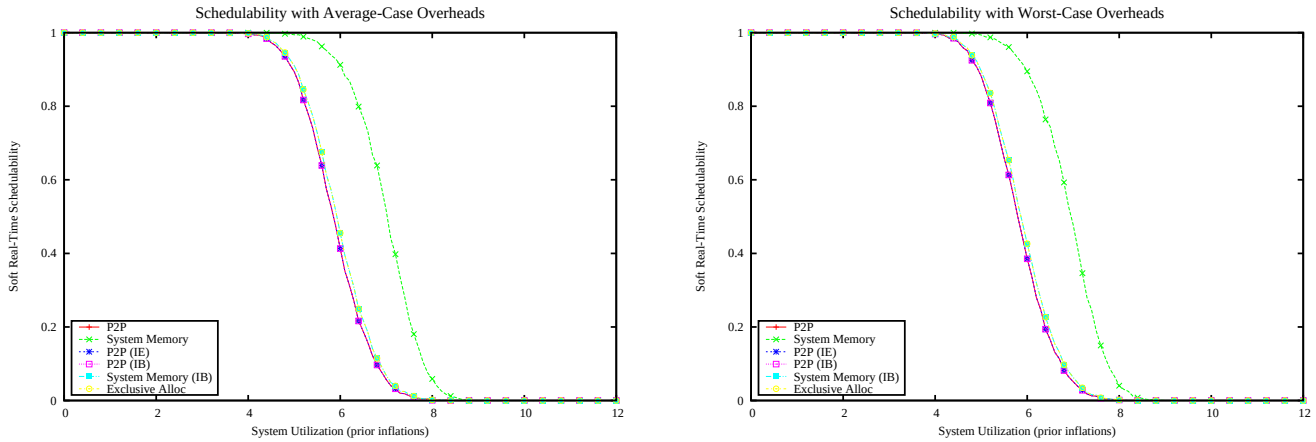

Figure 5861: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

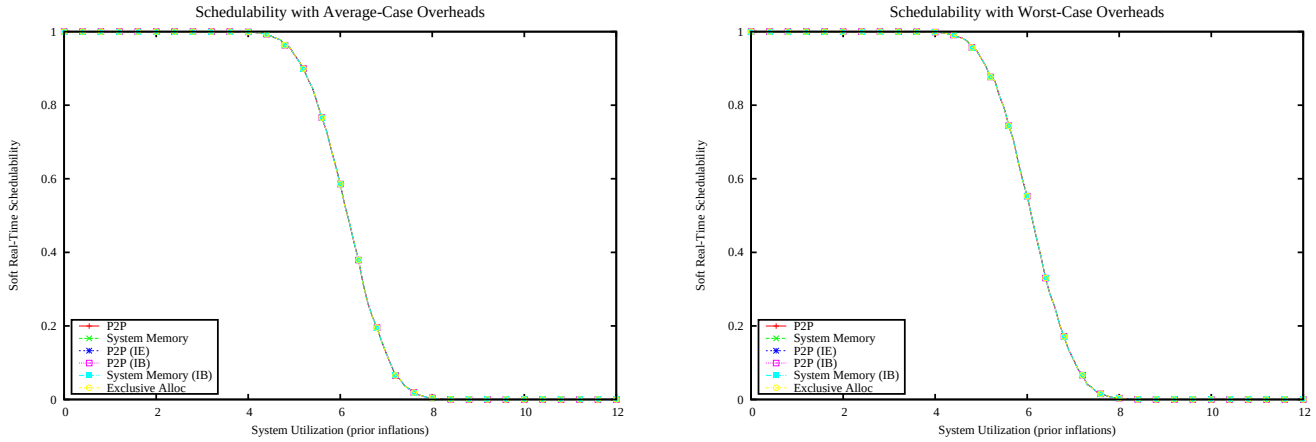

Figure 5862: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

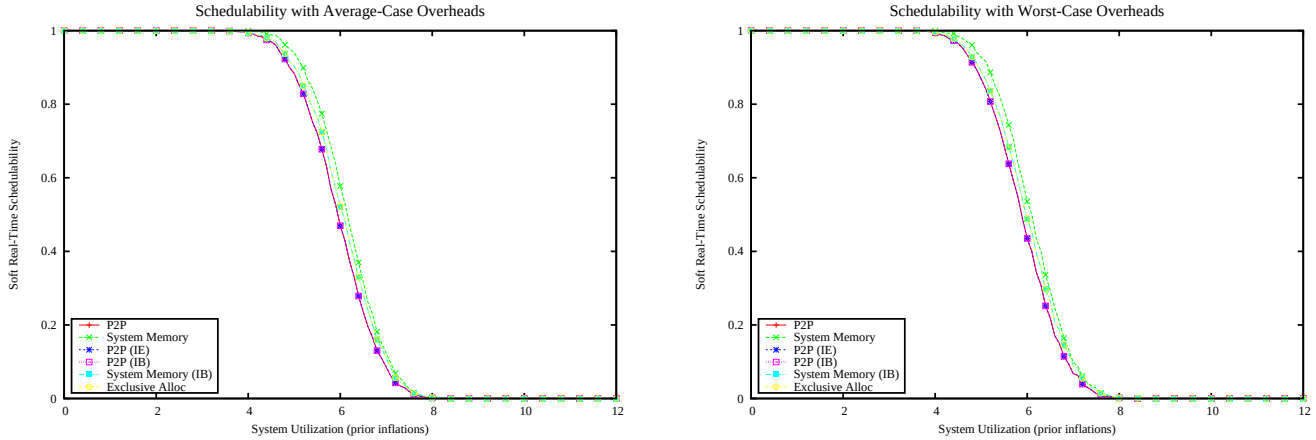

Figure 5863: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

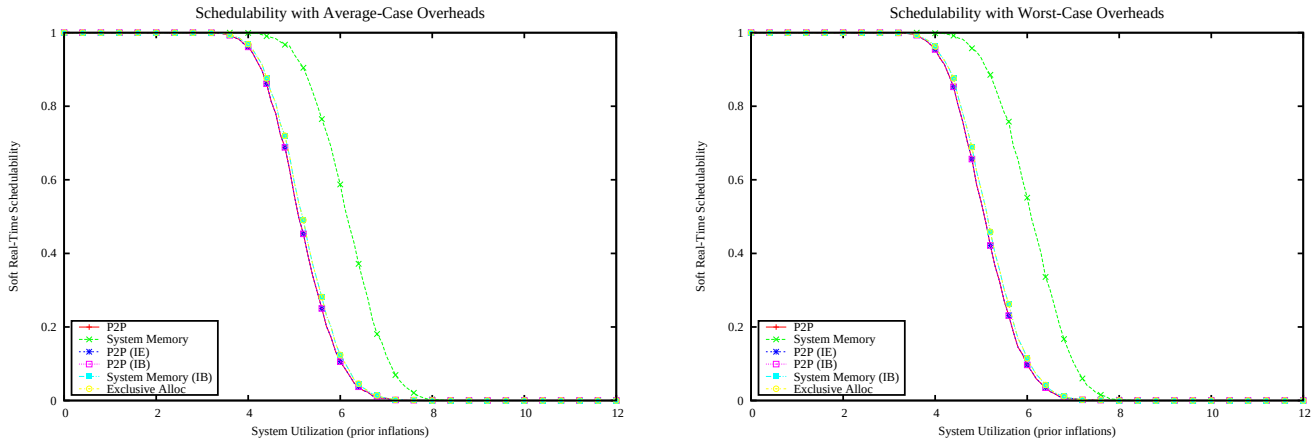

Figure 5864: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

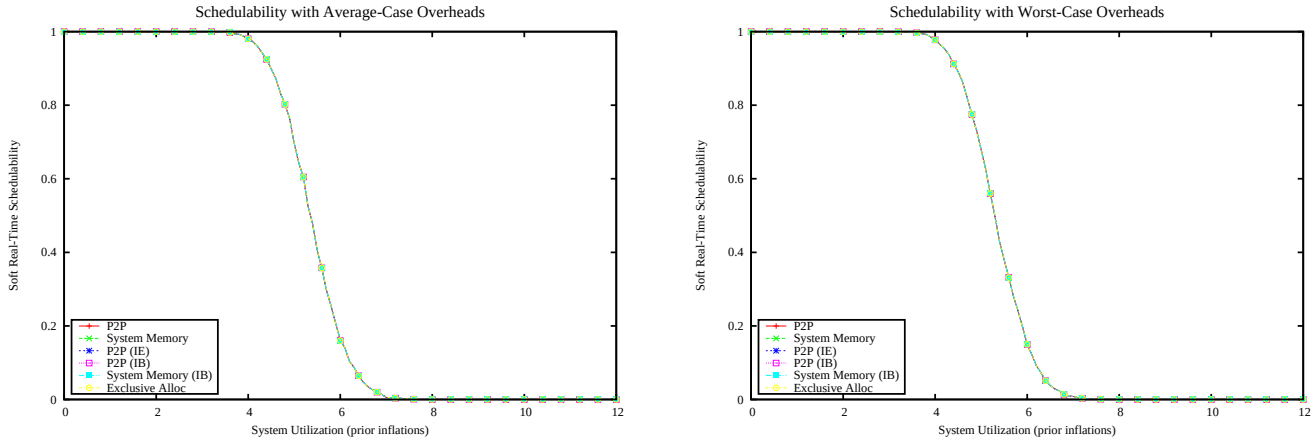

Figure 5865: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

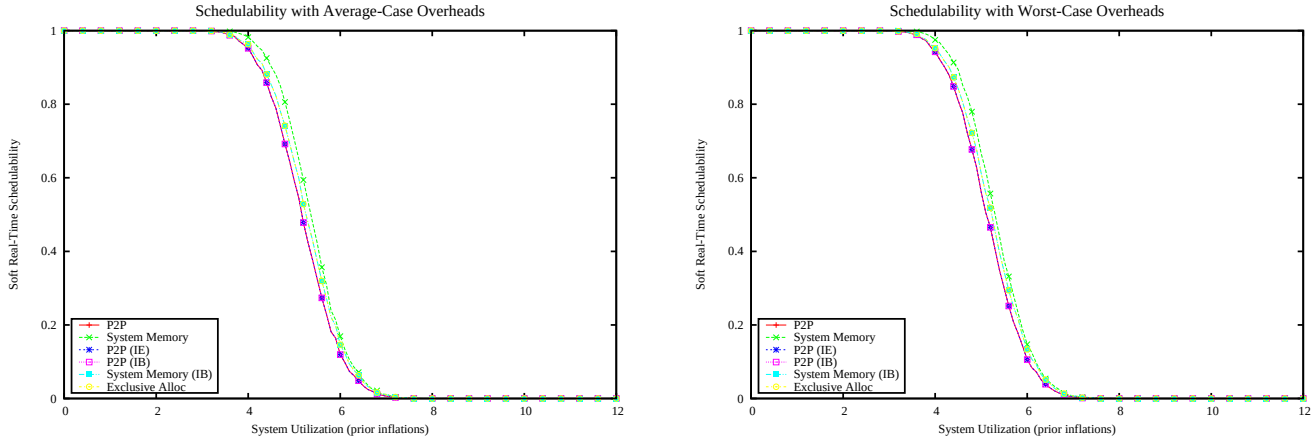

Figure 5866: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

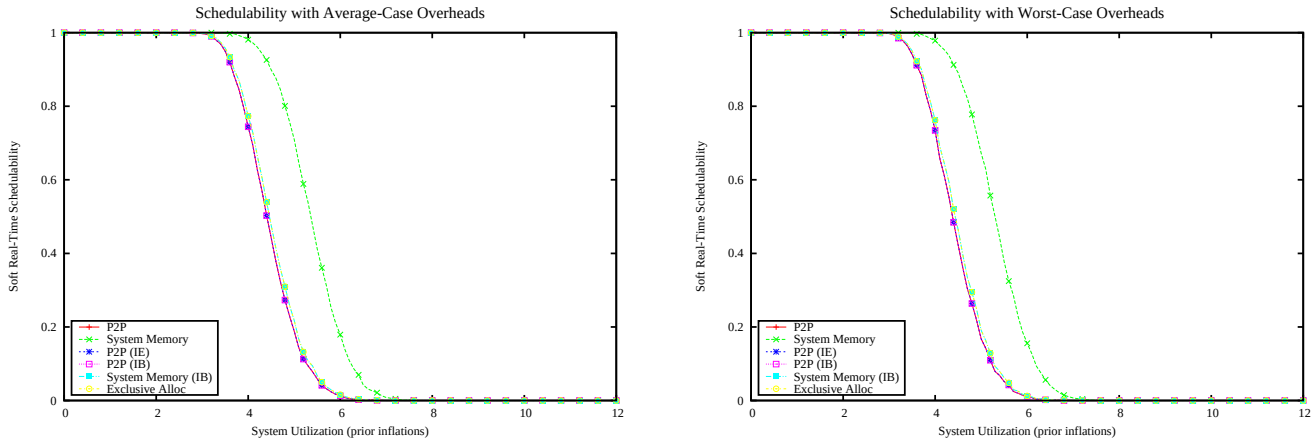

Figure 5867: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

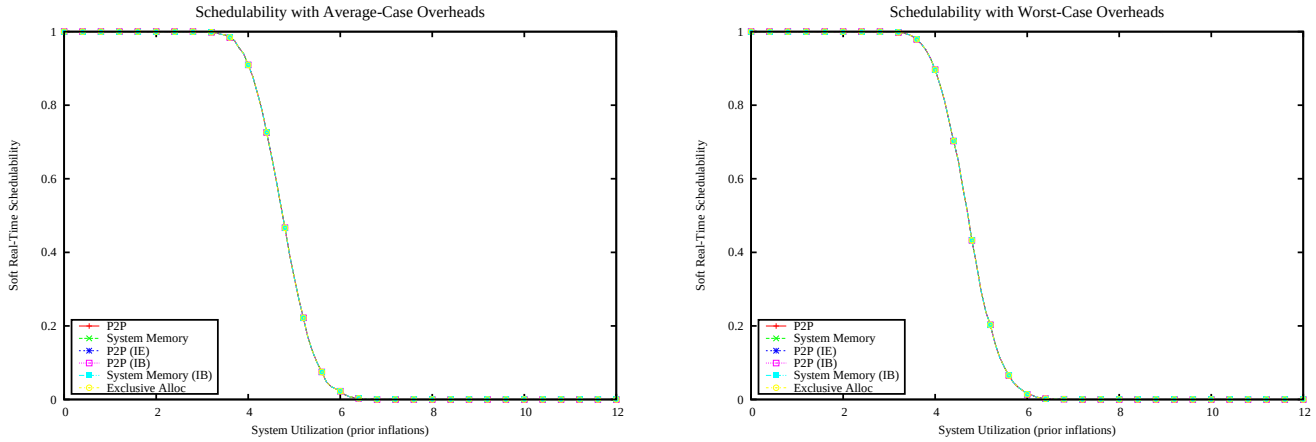

Figure 5868: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

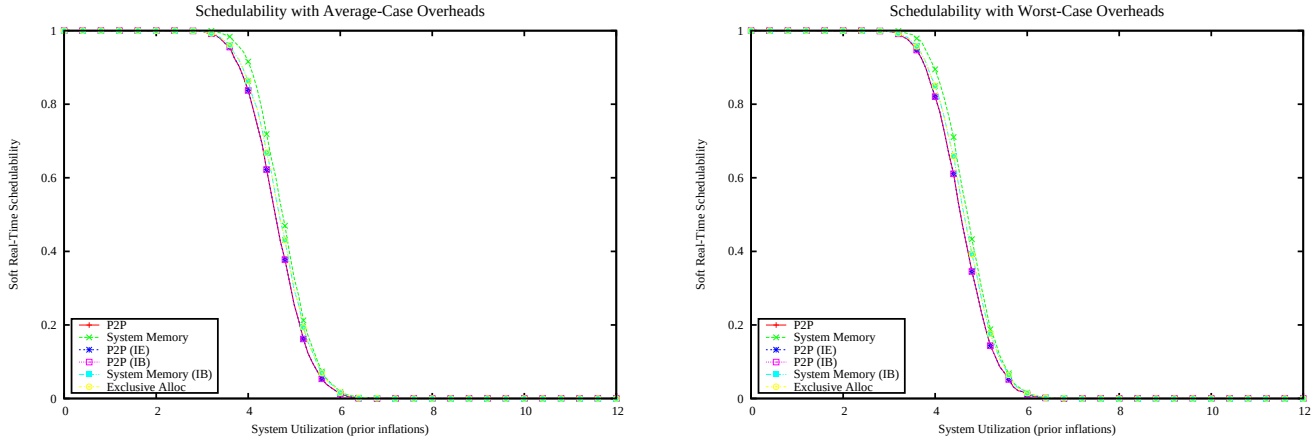

Figure 5869: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

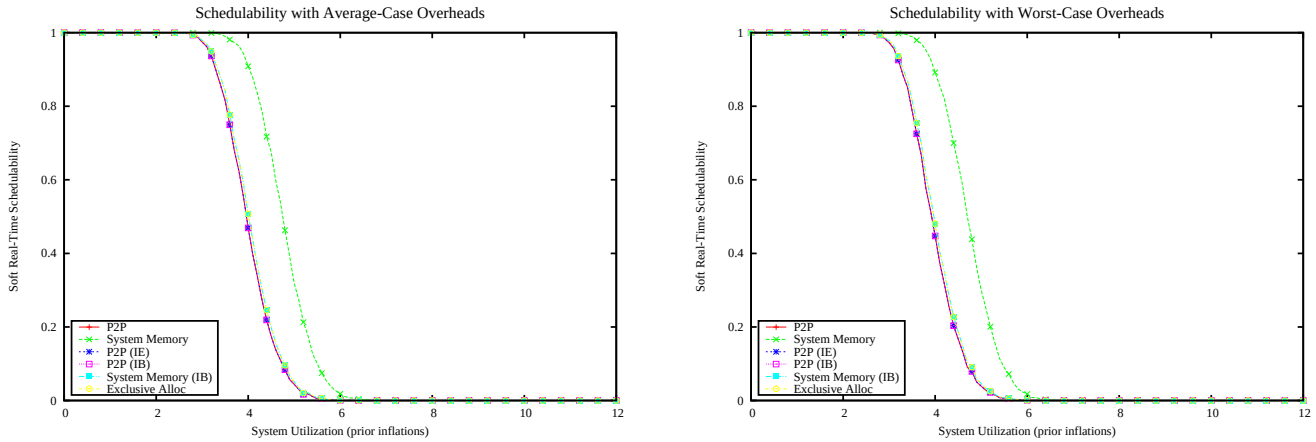

Figure 5870: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

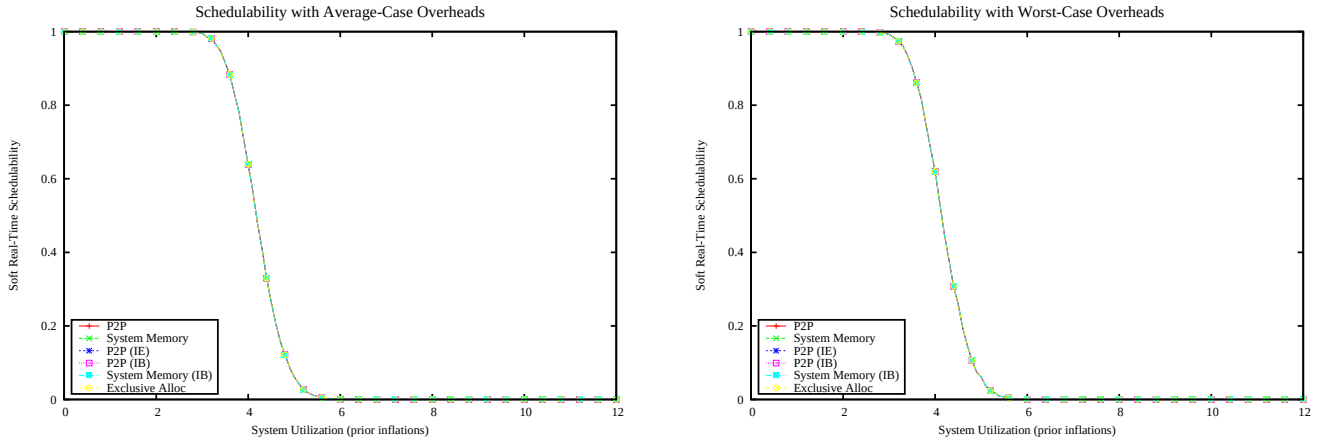

Figure 5871: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

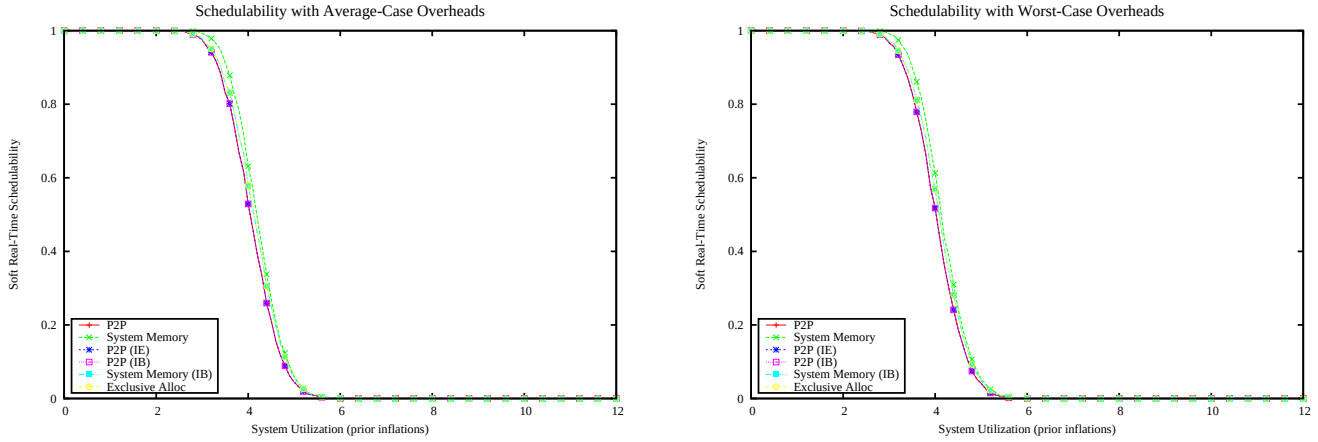

Figure 5872: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

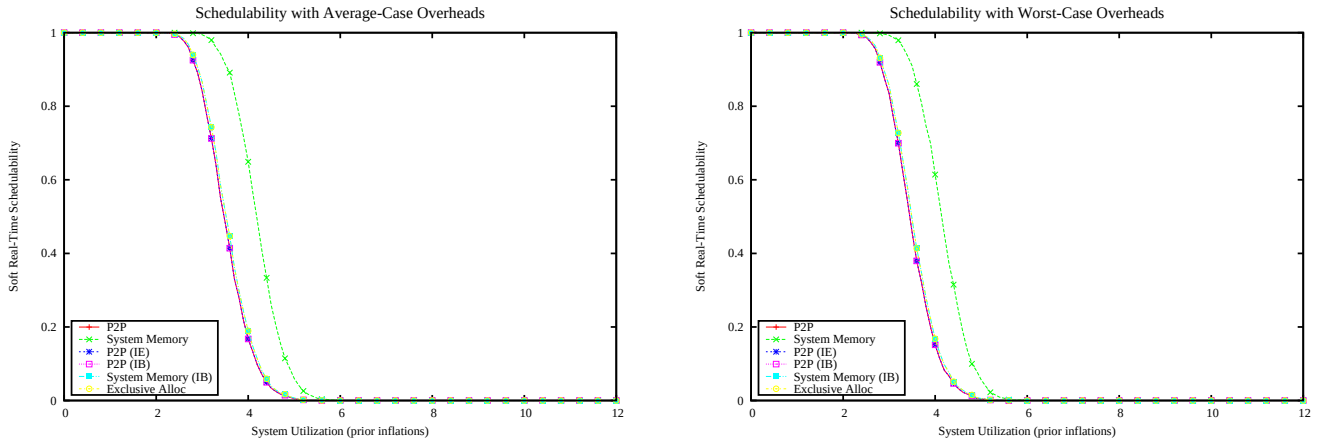

Figure 5873: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

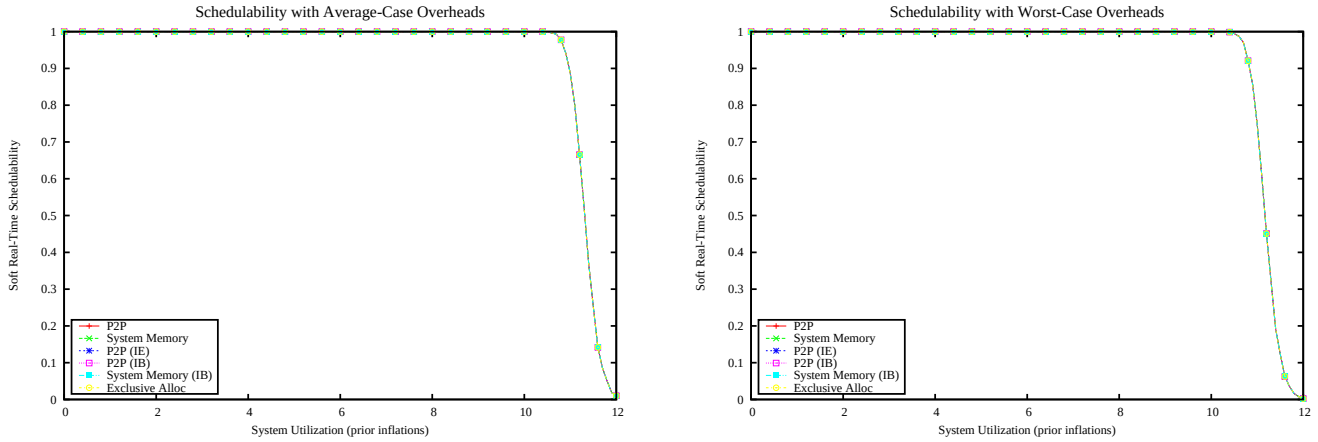

Figure 5874: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

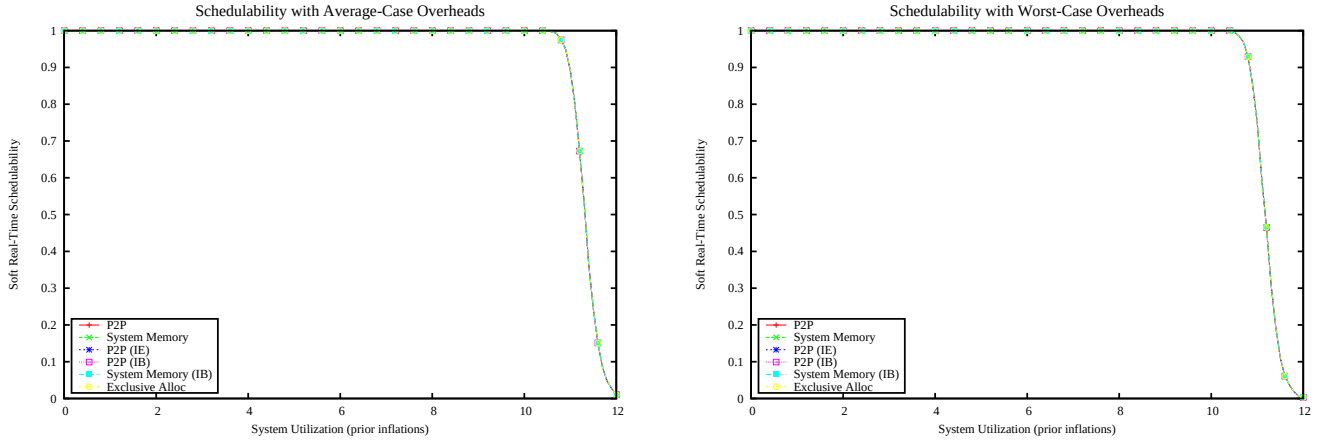

Figure 5875: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

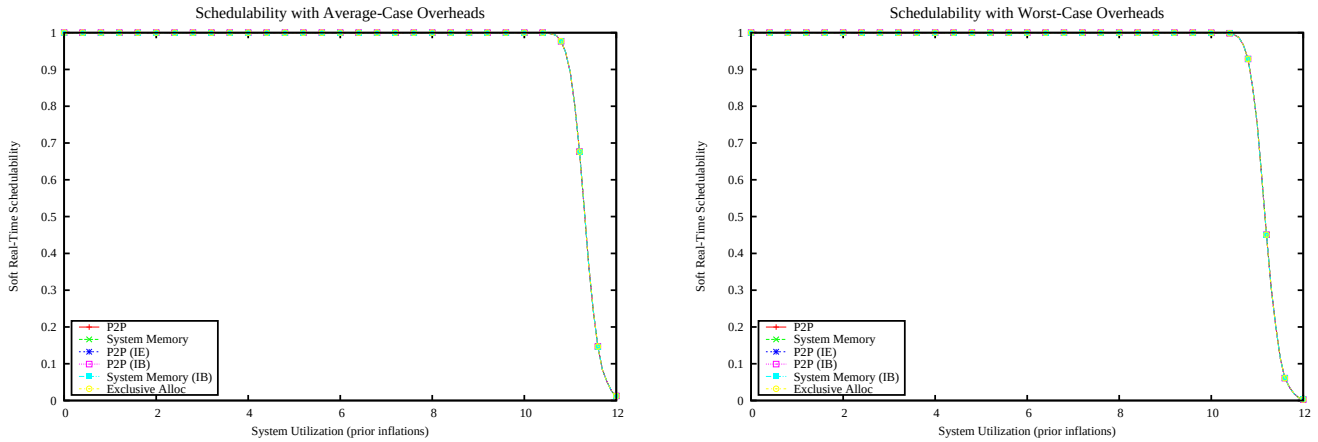

Figure 5876: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

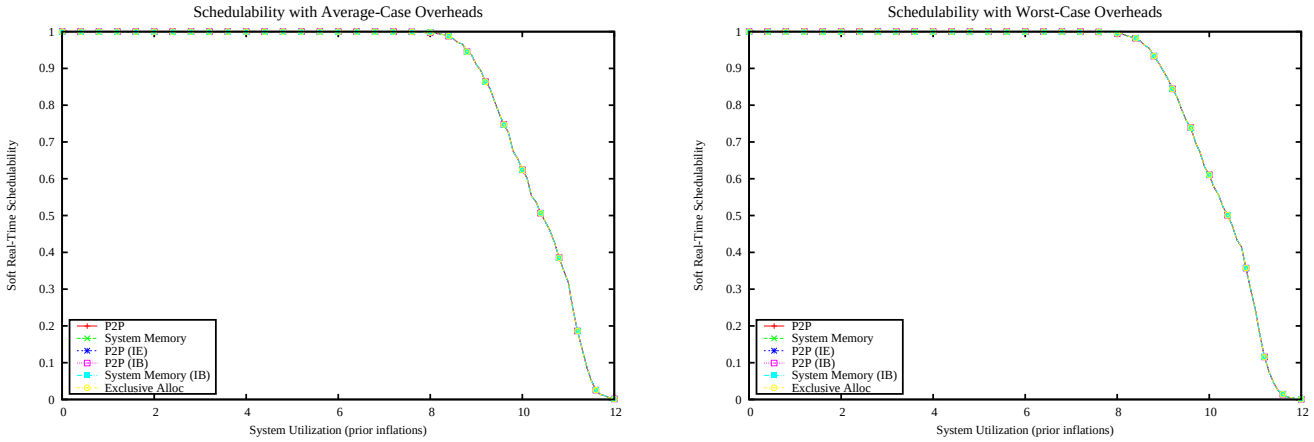

Figure 5877: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

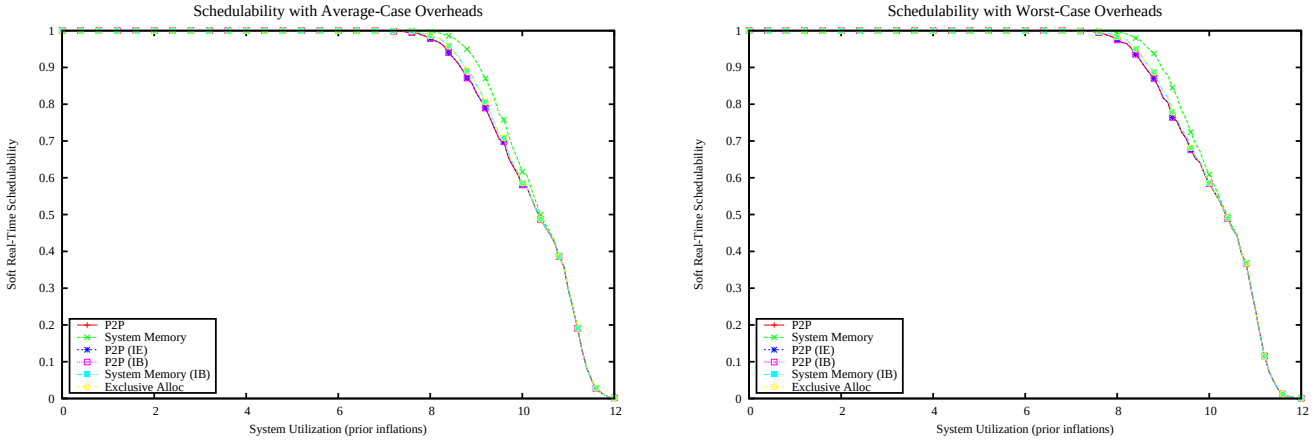

Figure 5878: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

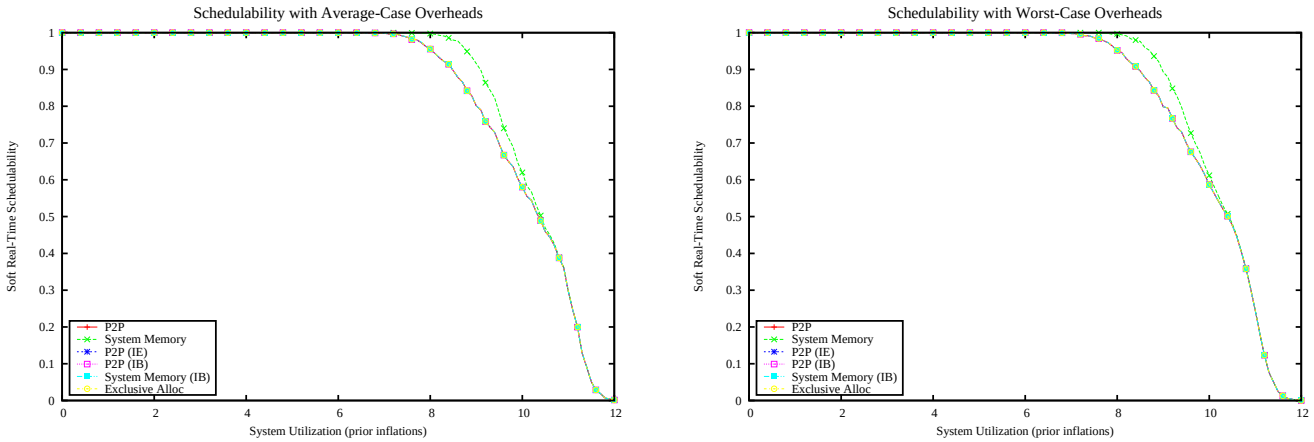

Figure 5879: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

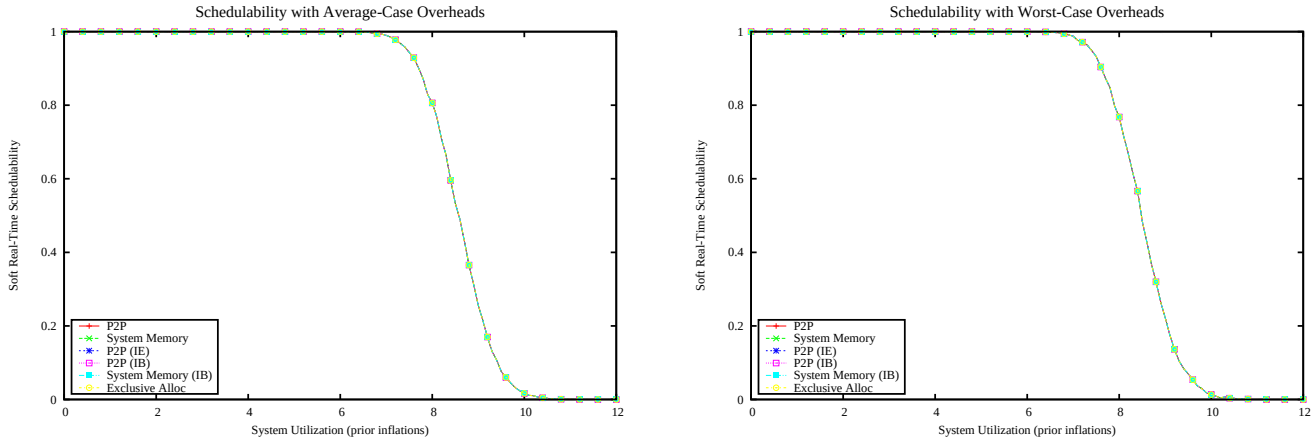

Figure 5880: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

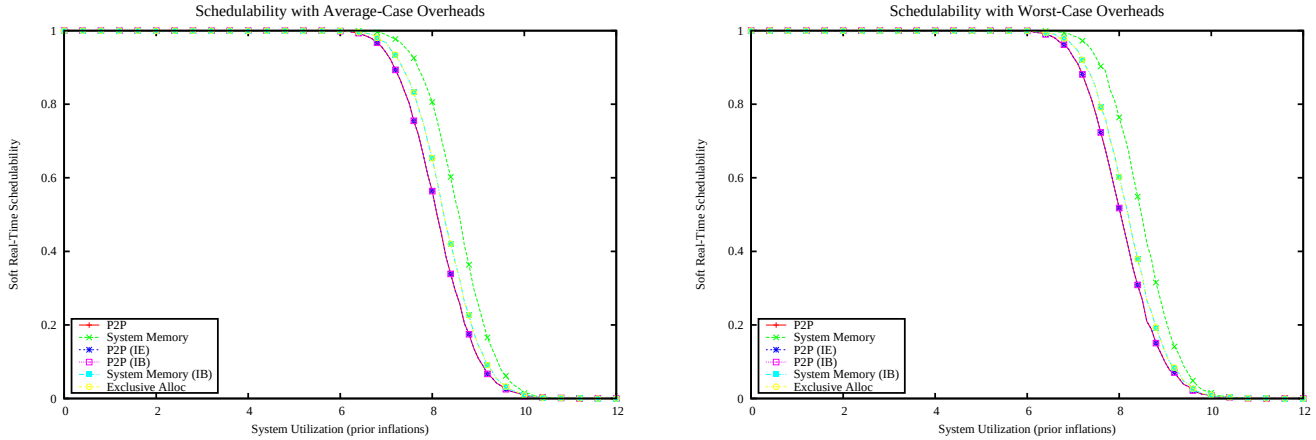

Figure 5881: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

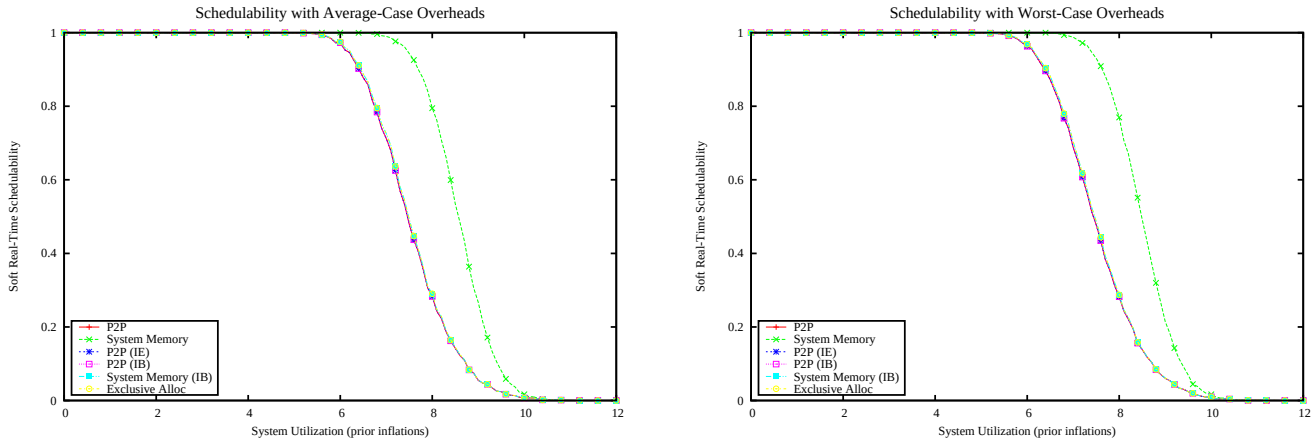

Figure 5882: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

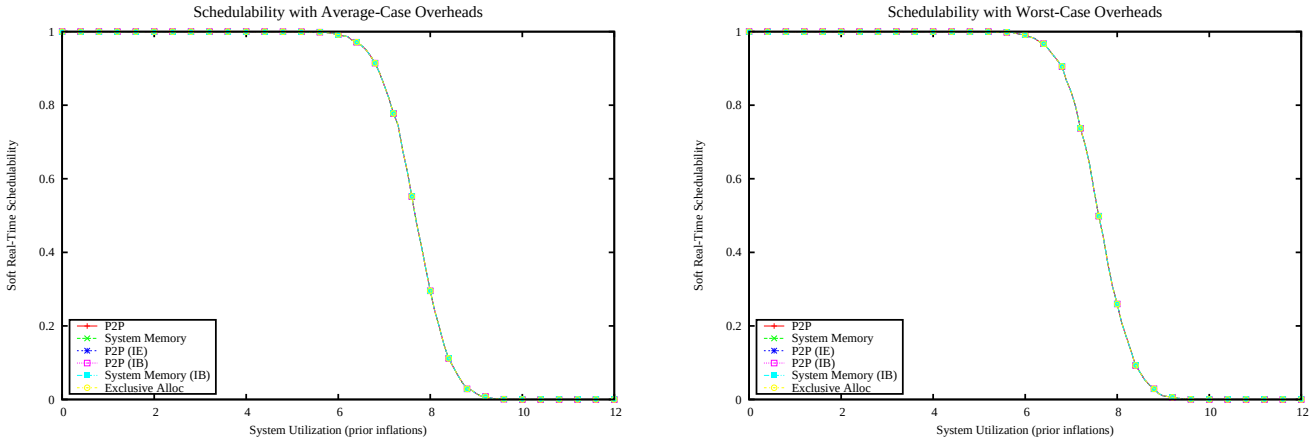

Figure 5883: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

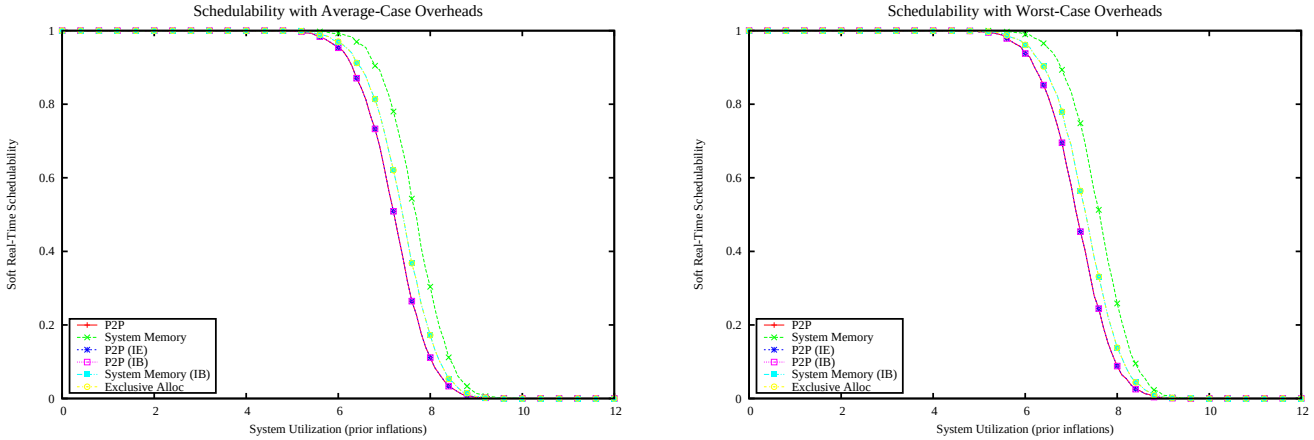

Figure 5884: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

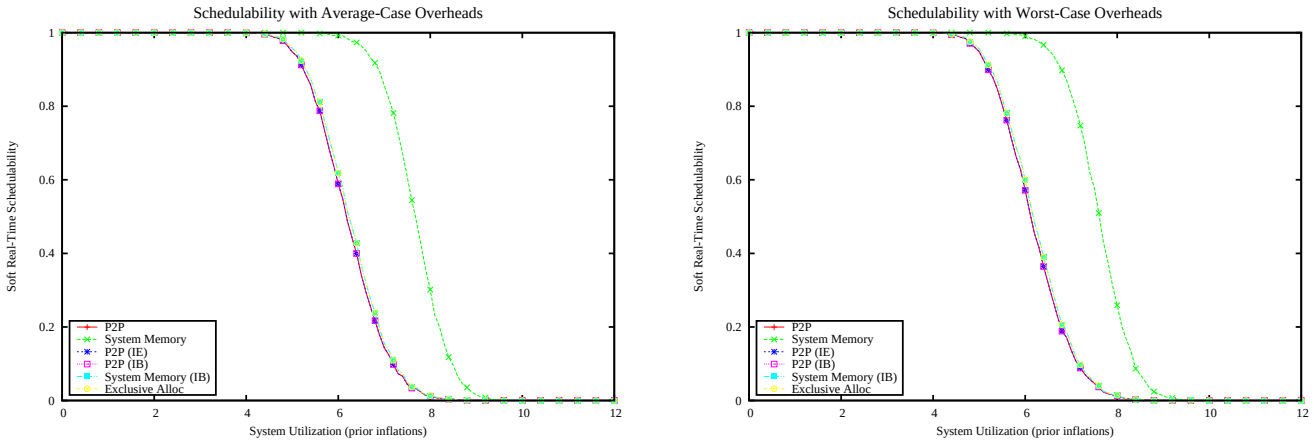

Figure 5885: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

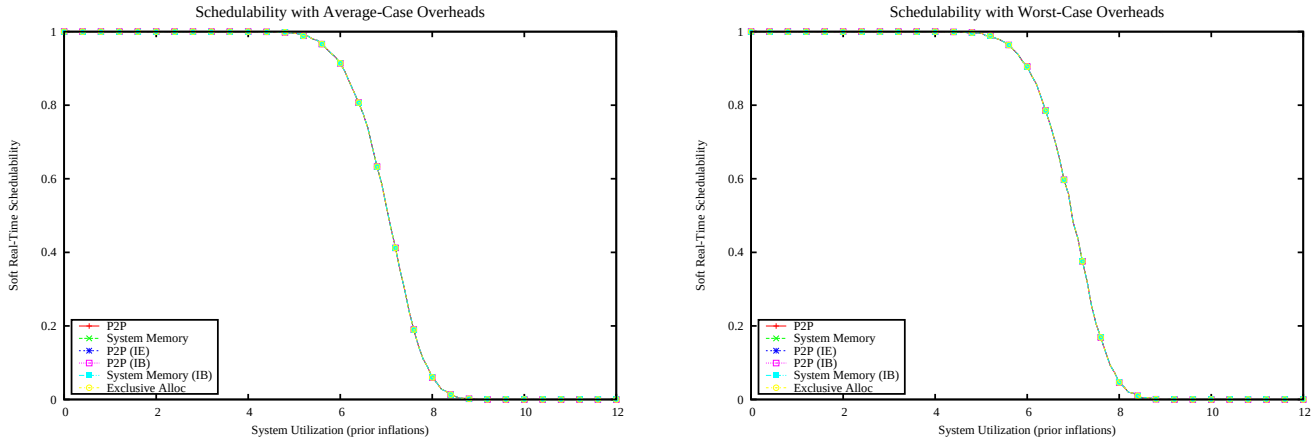

Figure 5886: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

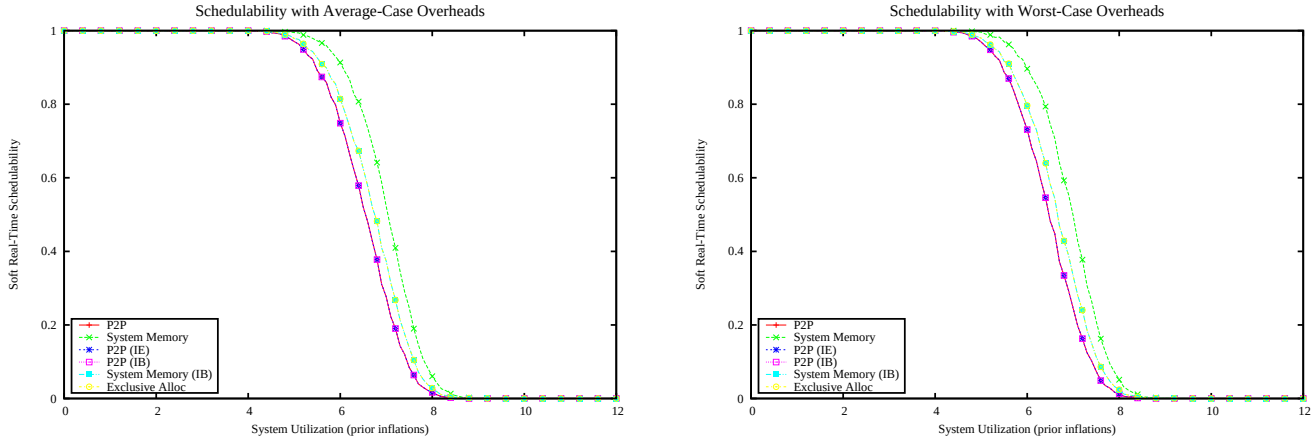

Figure 5887: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

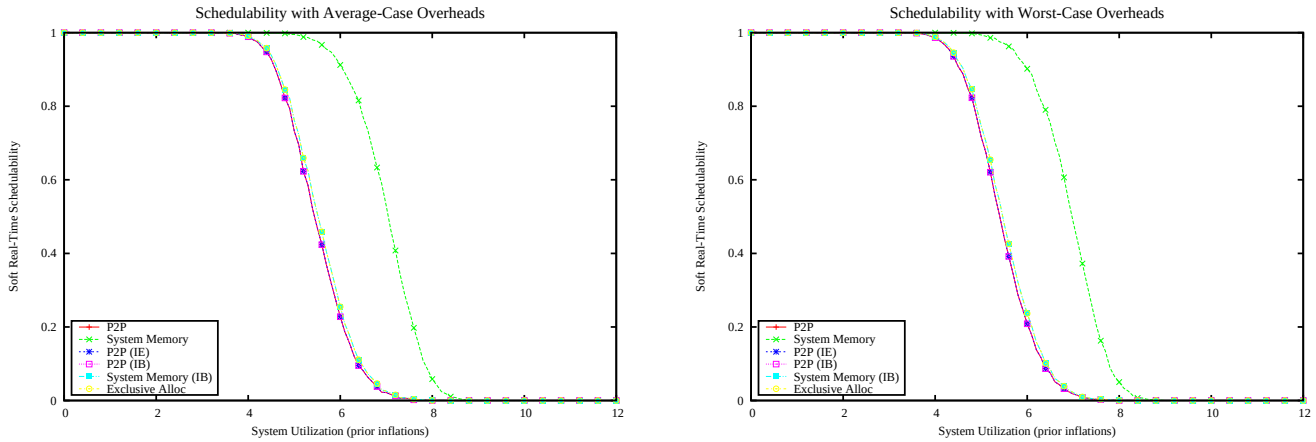

Figure 5888: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

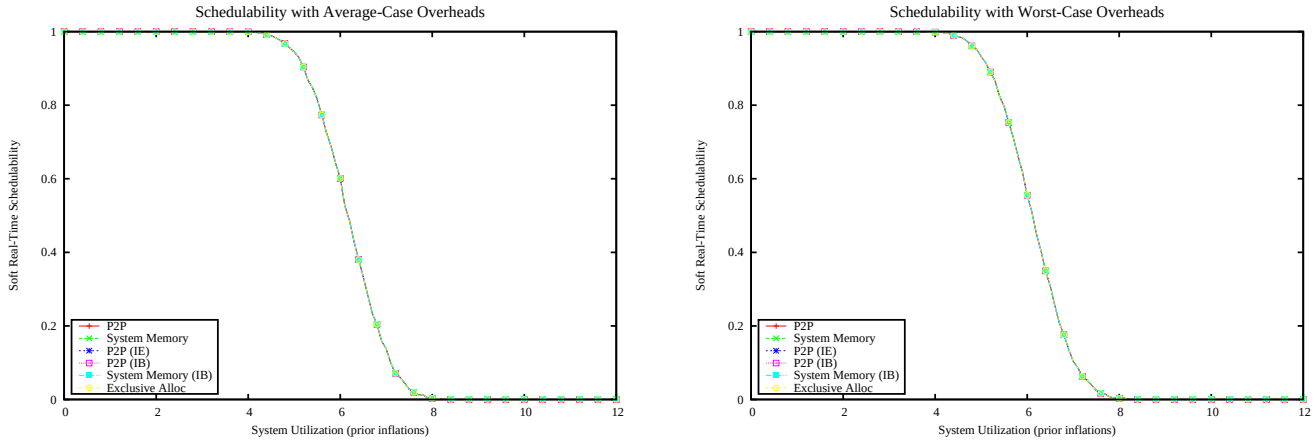

Figure 5889: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

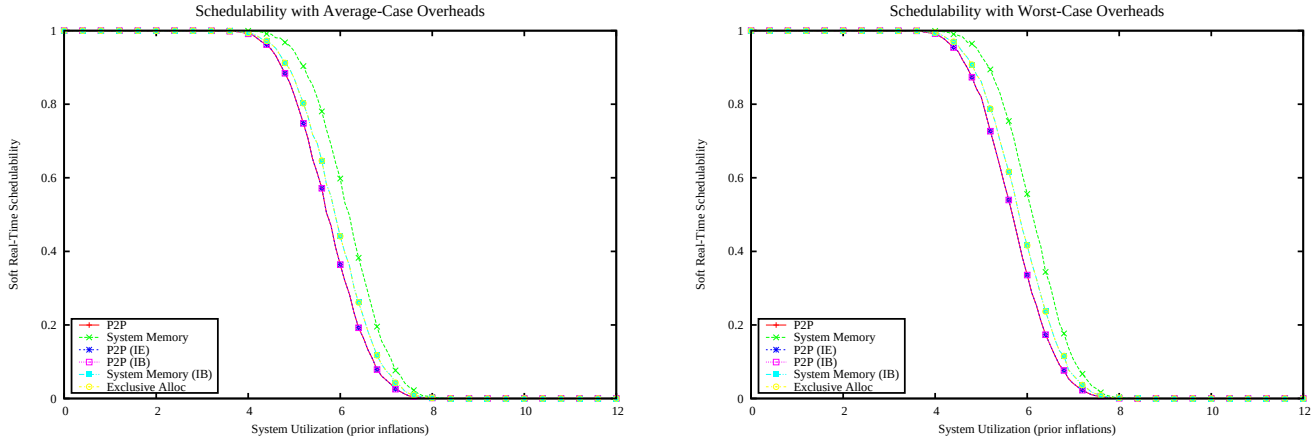

Figure 5890: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

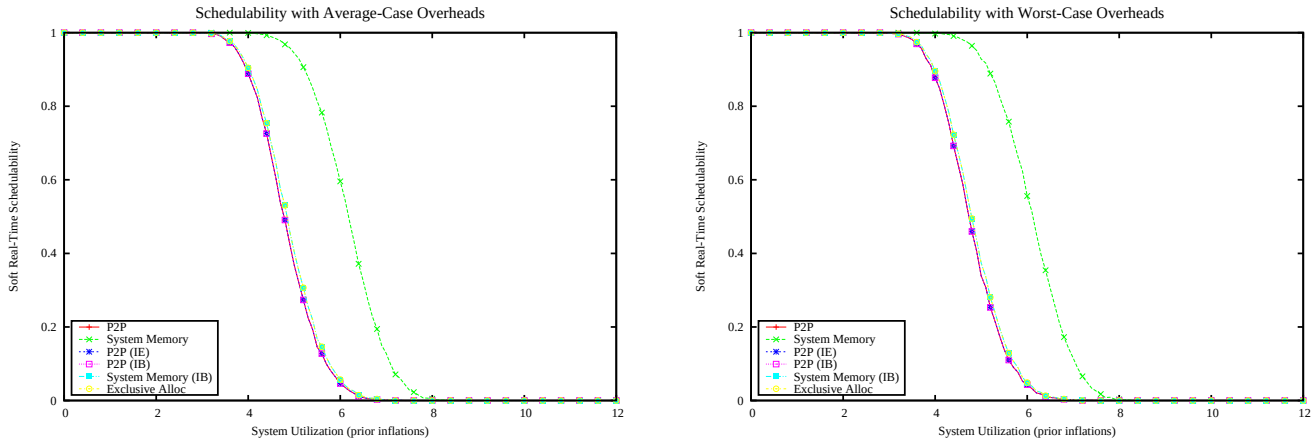

Figure 5891: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

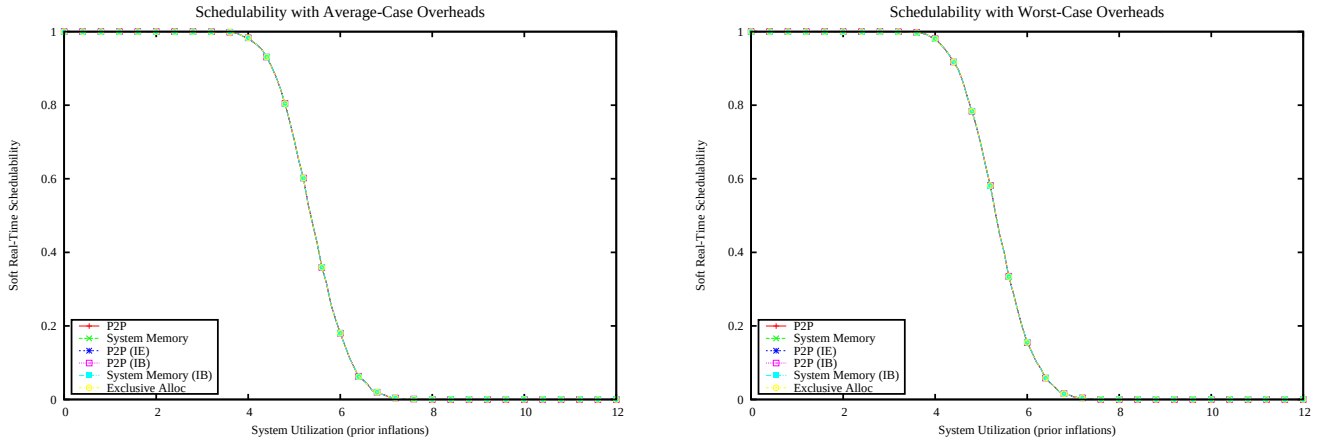

Figure 5892: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

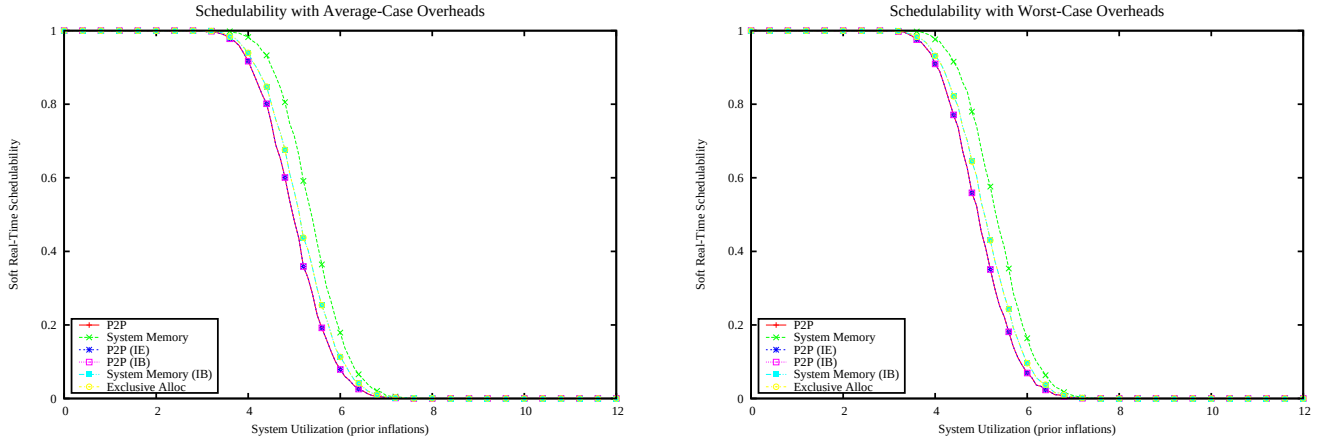

Figure 5893: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

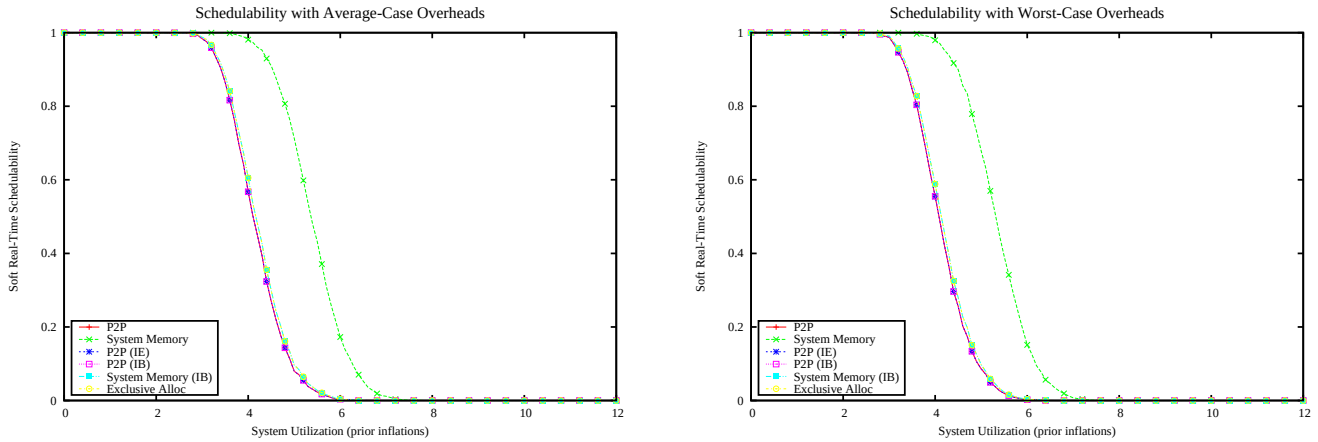

Figure 5894: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

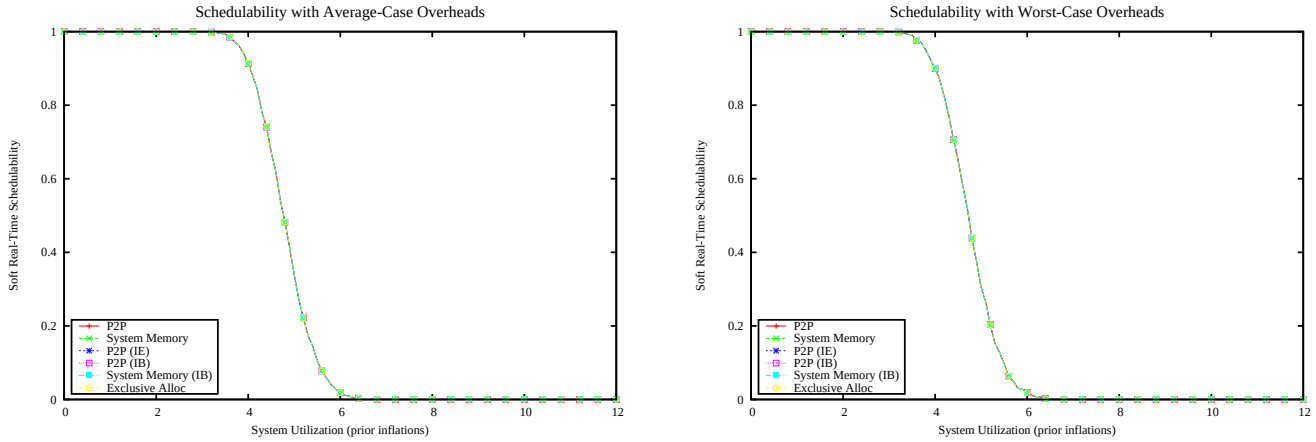

Figure 5895: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

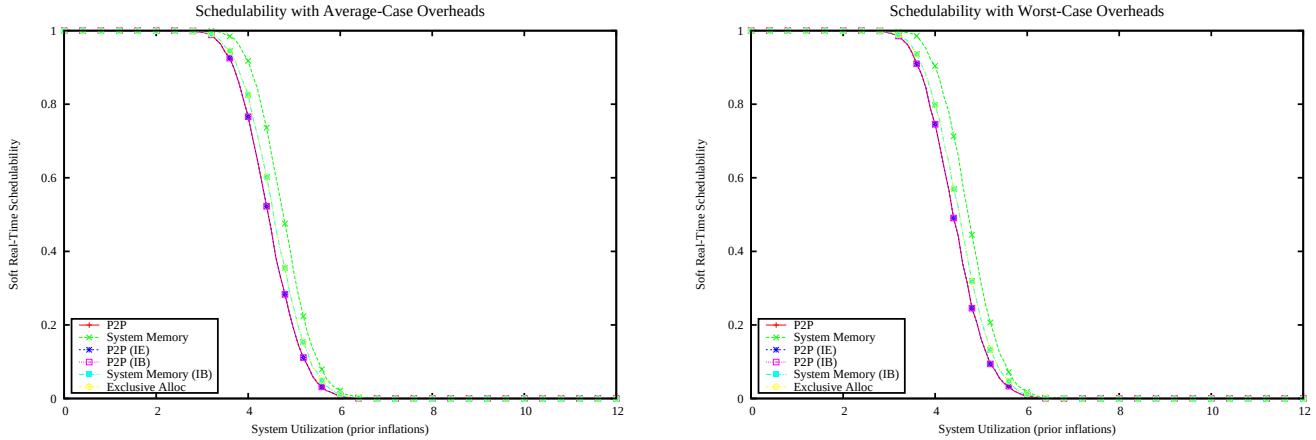

Figure 5896: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

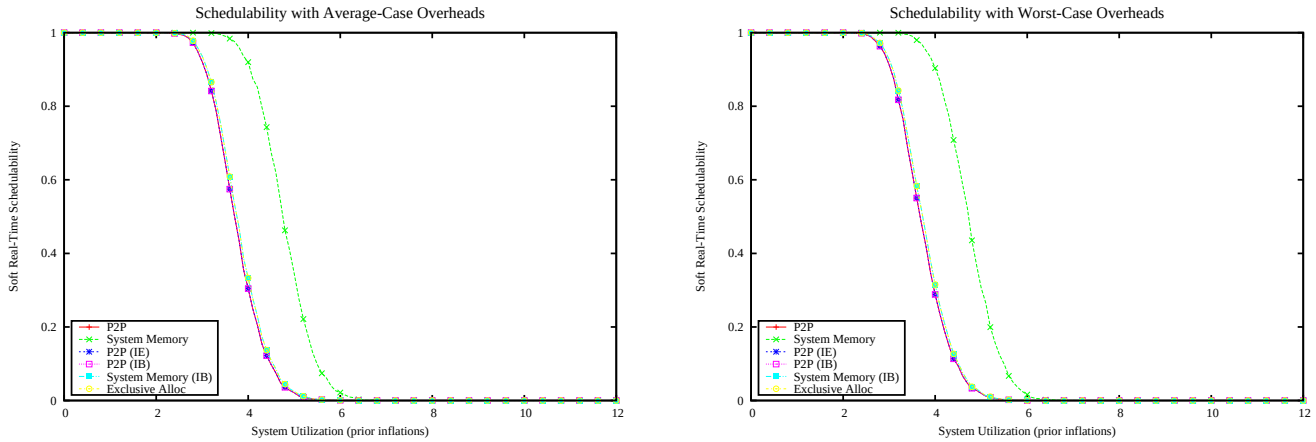

Figure 5897: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

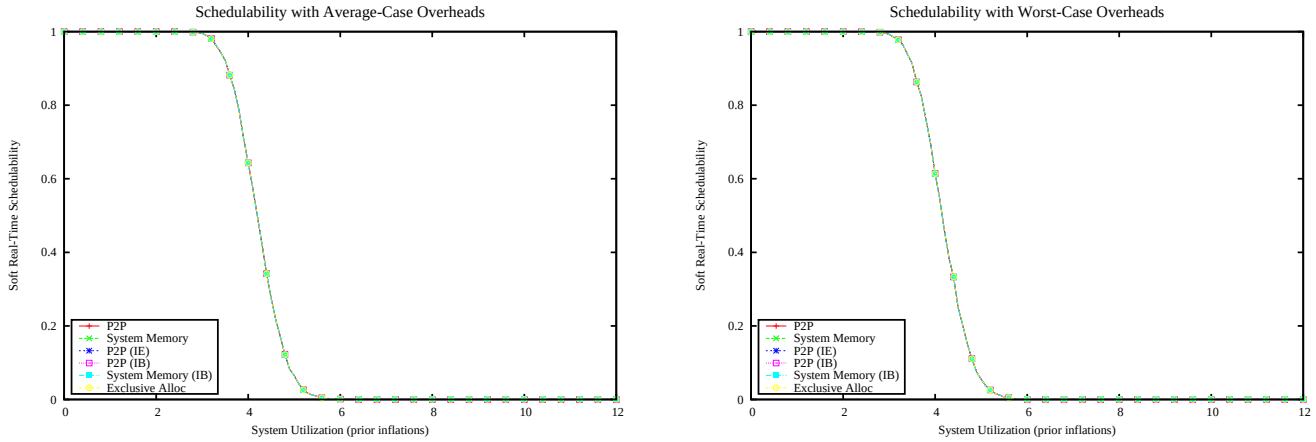

Figure 5898: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

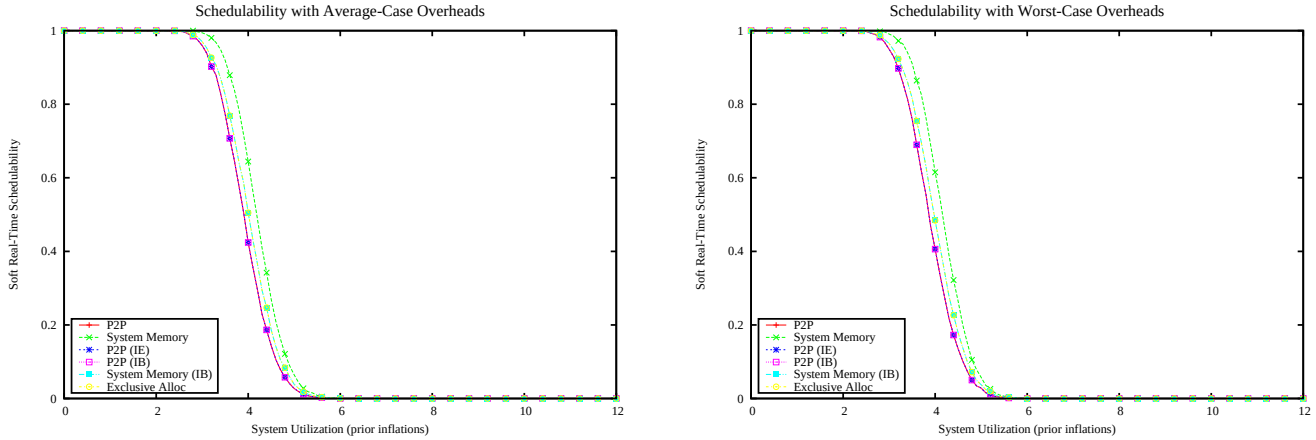

Figure 5899: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

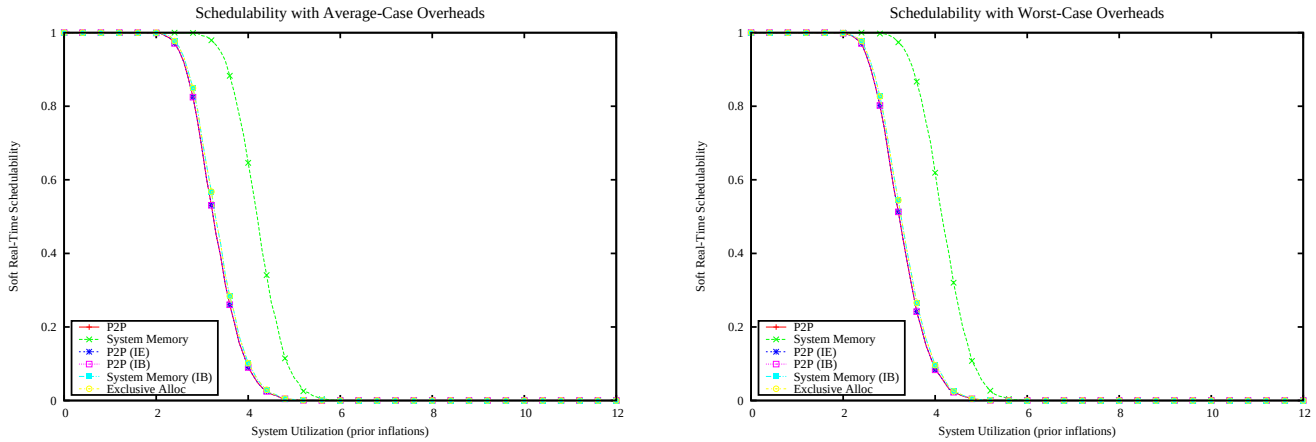

Figure 5900: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

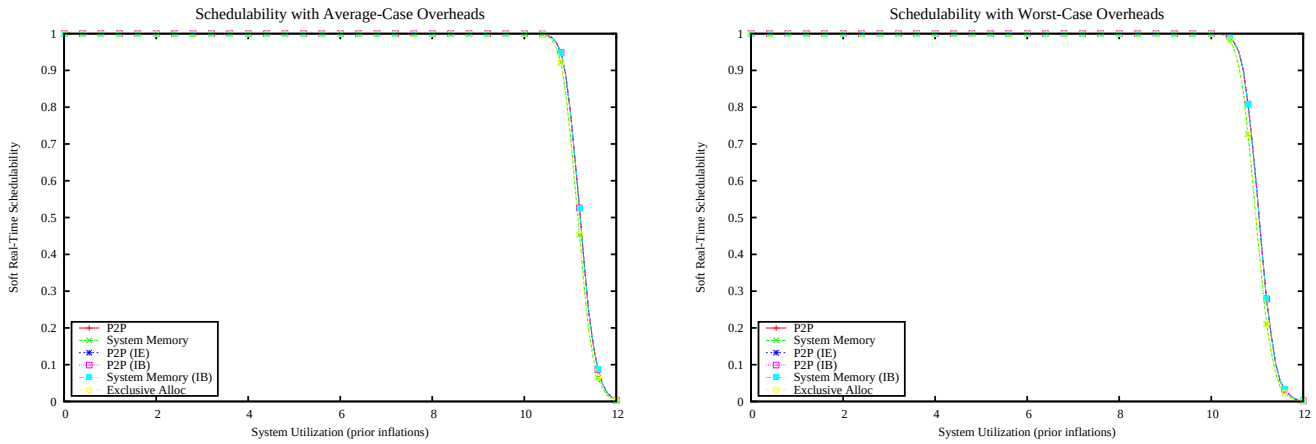

Figure 5901: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

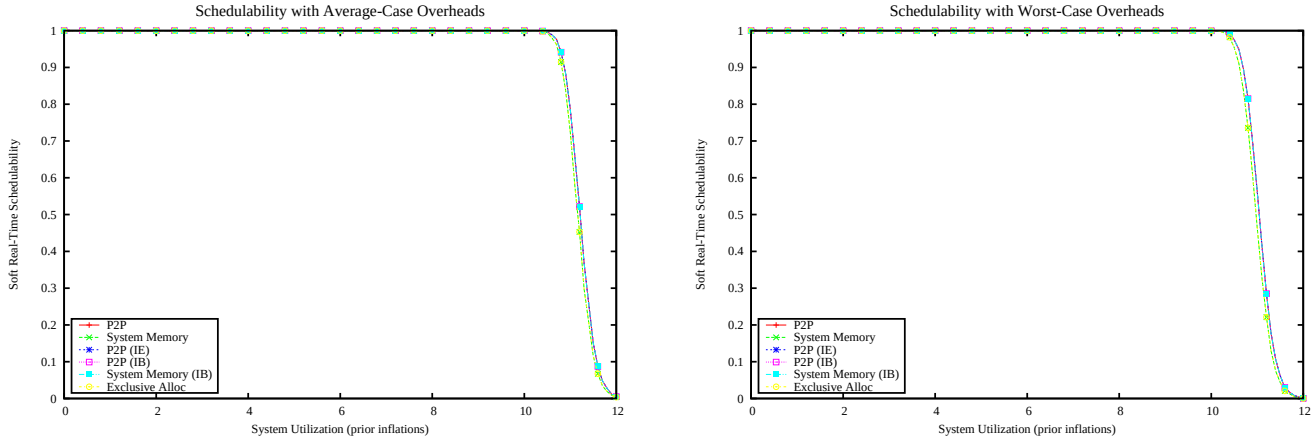

Figure 5902: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

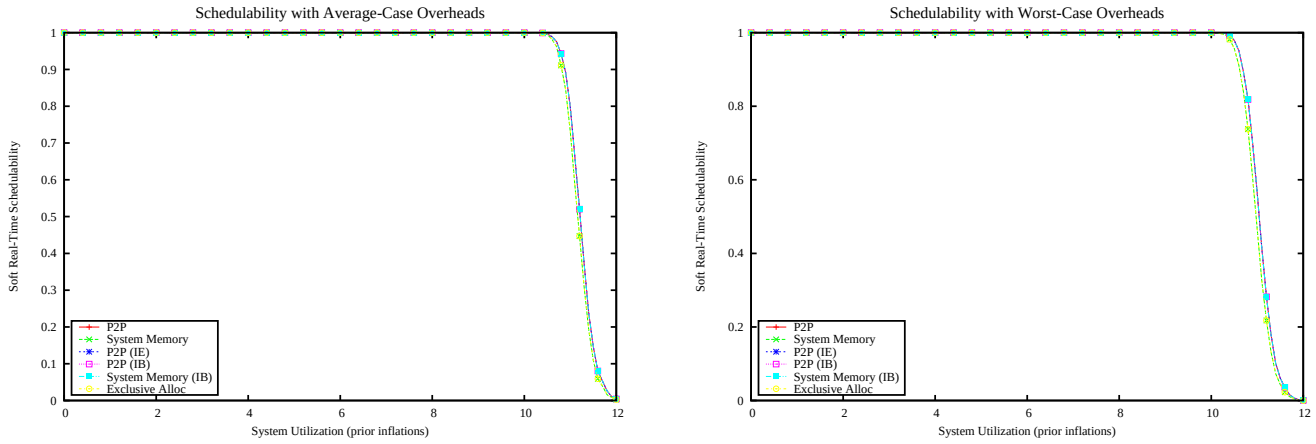

Figure 5903: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

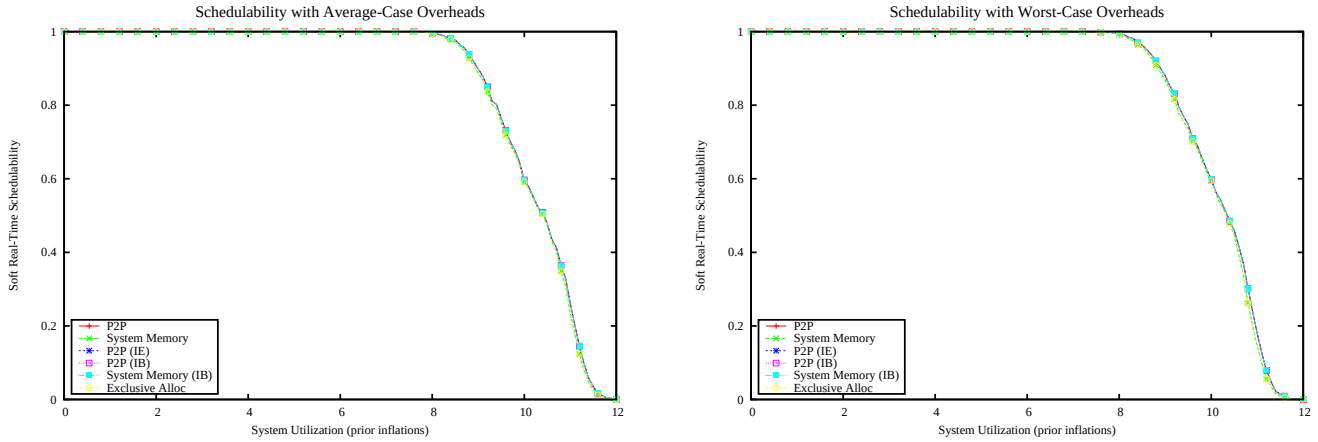

Figure 5904: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

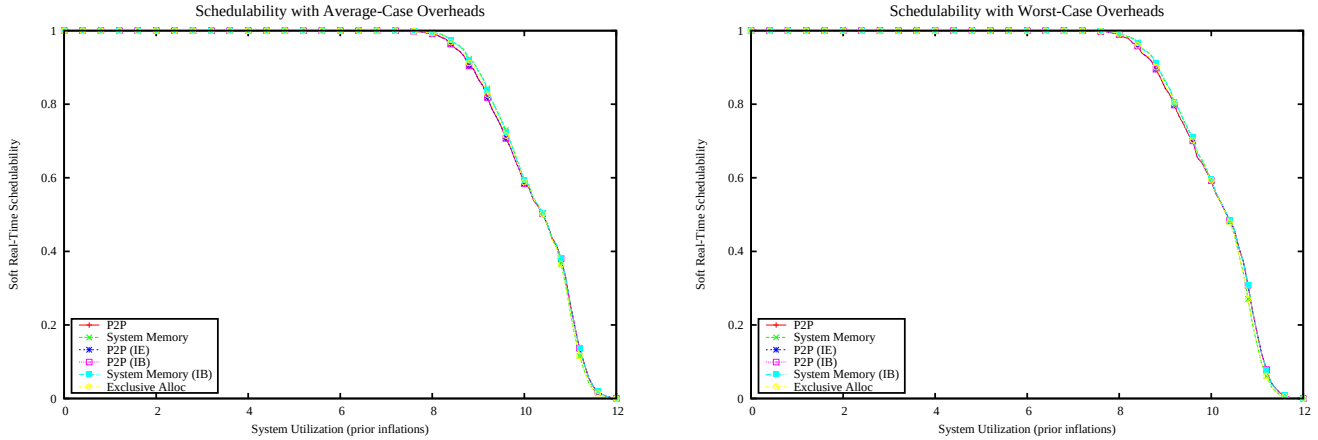

Figure 5905: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

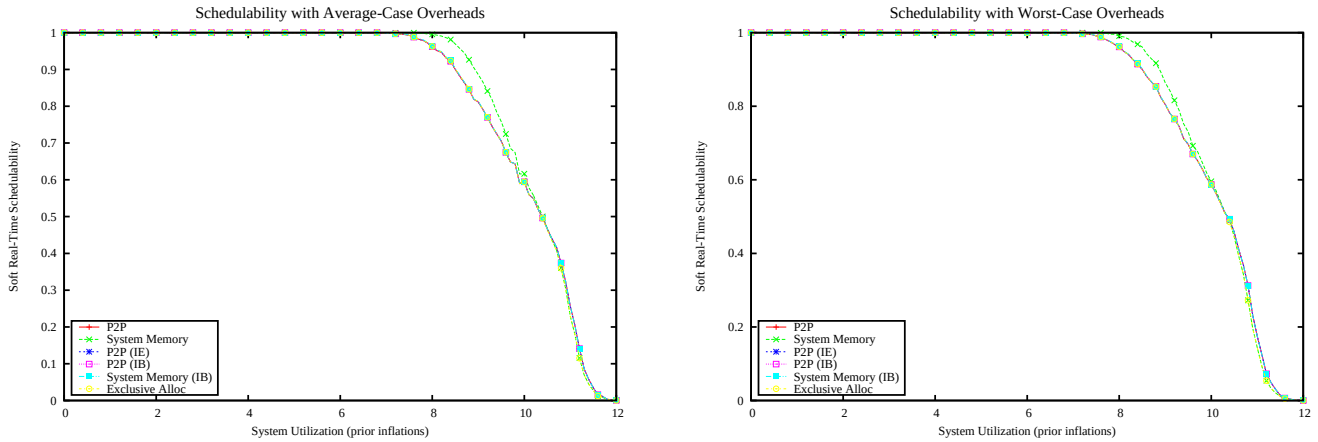

Figure 5906: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

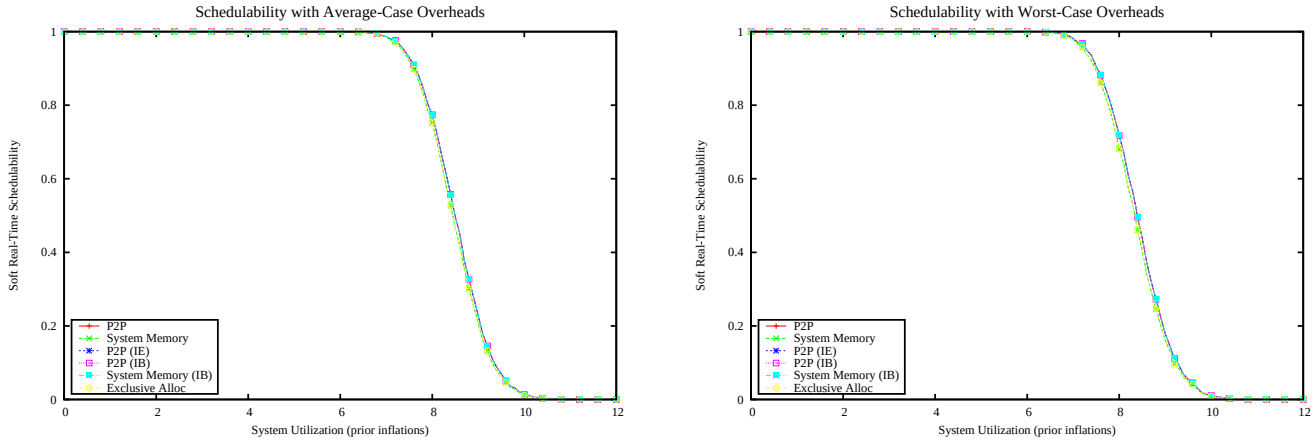

Figure 5907: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

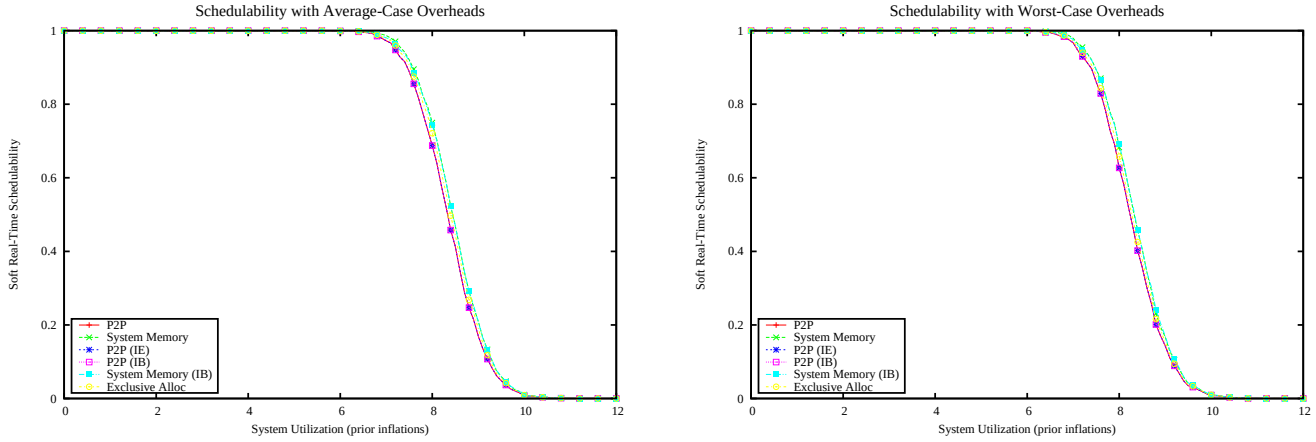

Figure 5908: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

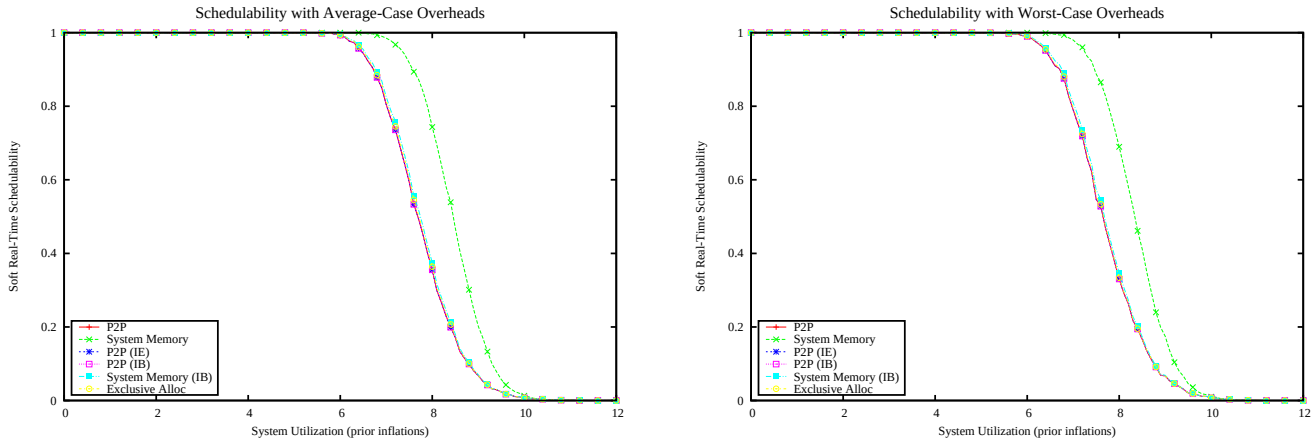

Figure 5909: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

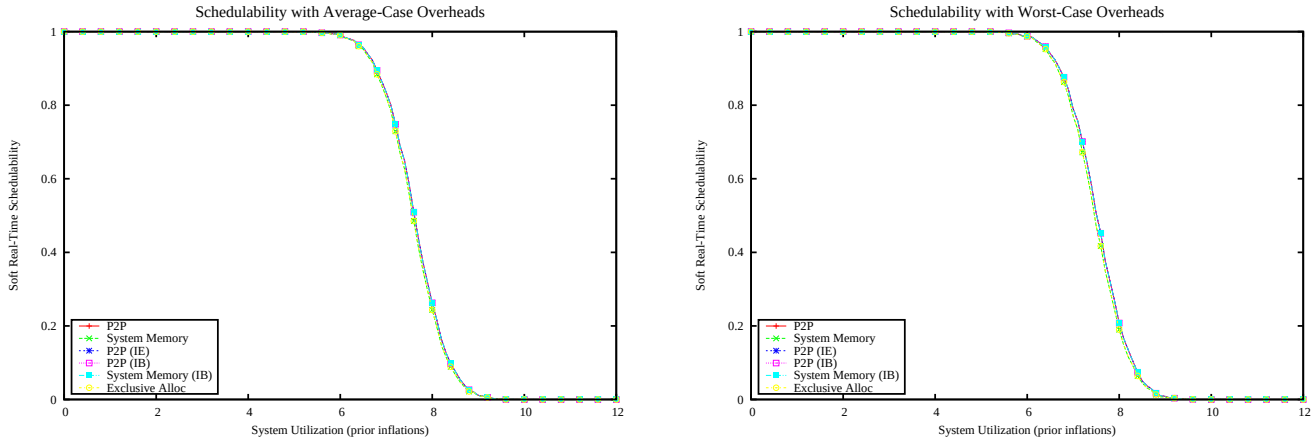

Figure 5910: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

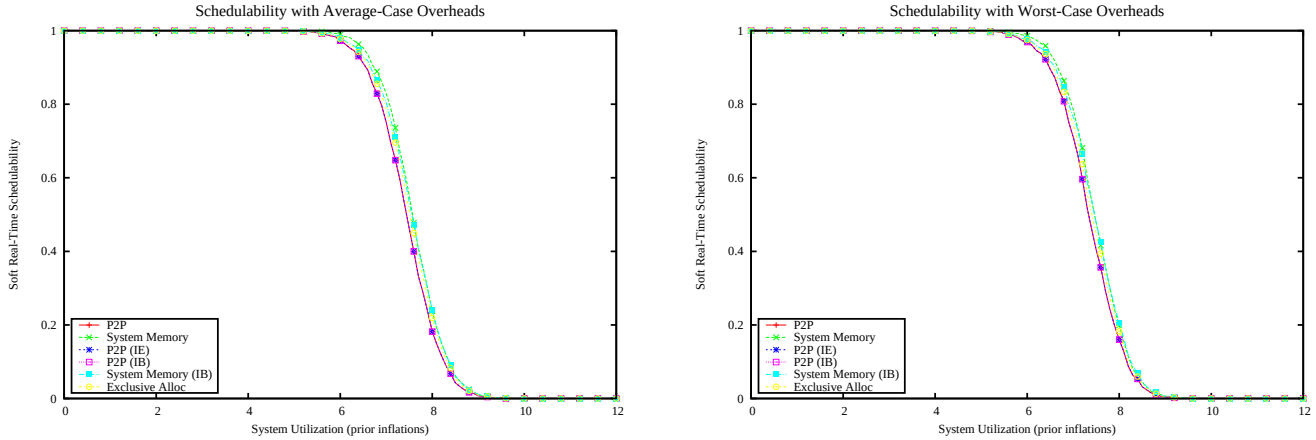

Figure 5911: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

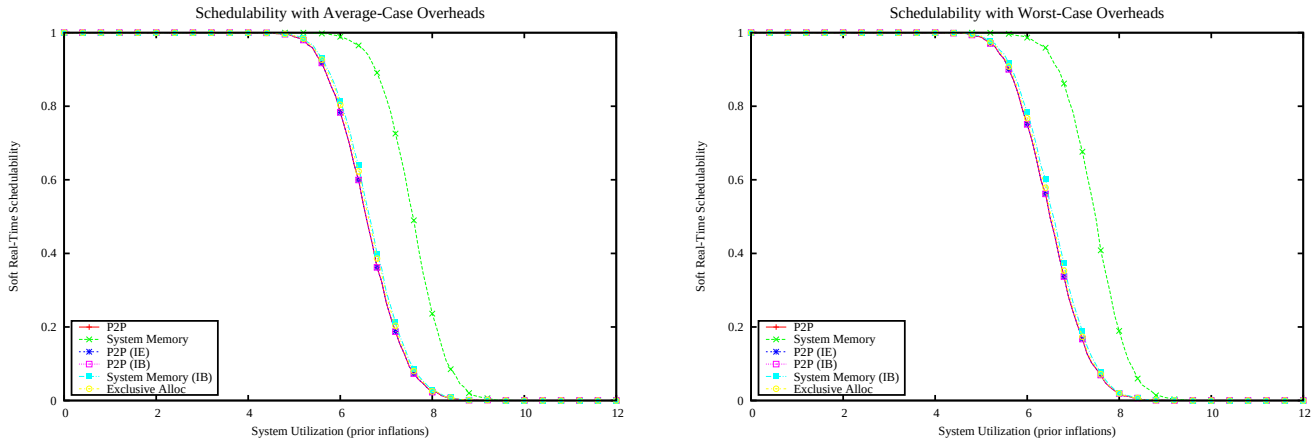

Figure 5912: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

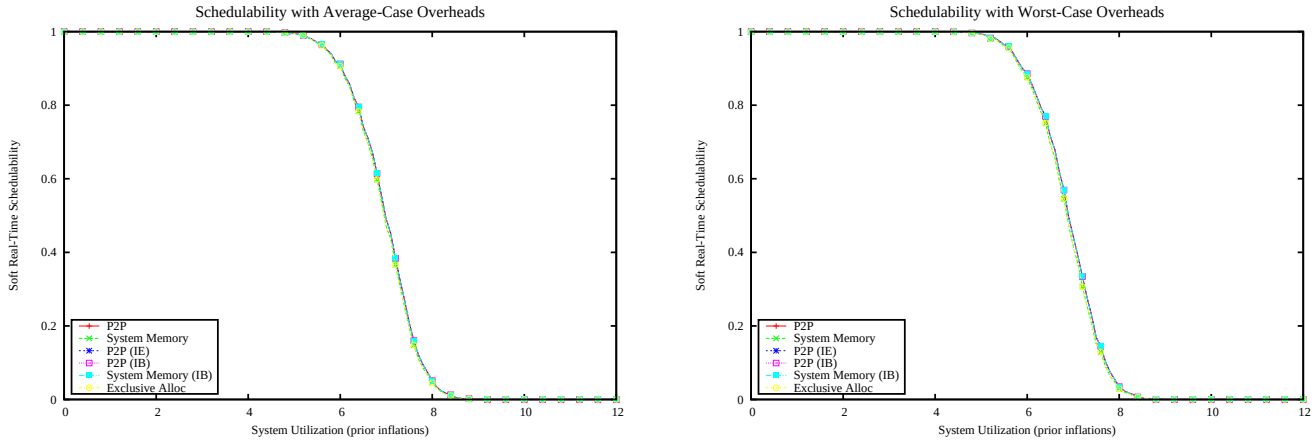

Figure 5913: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

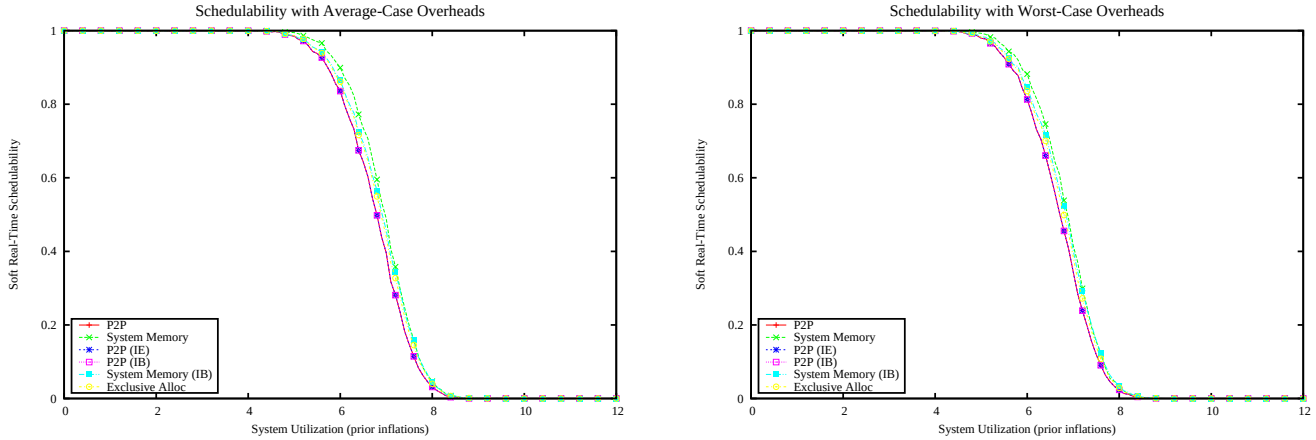

Figure 5914: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

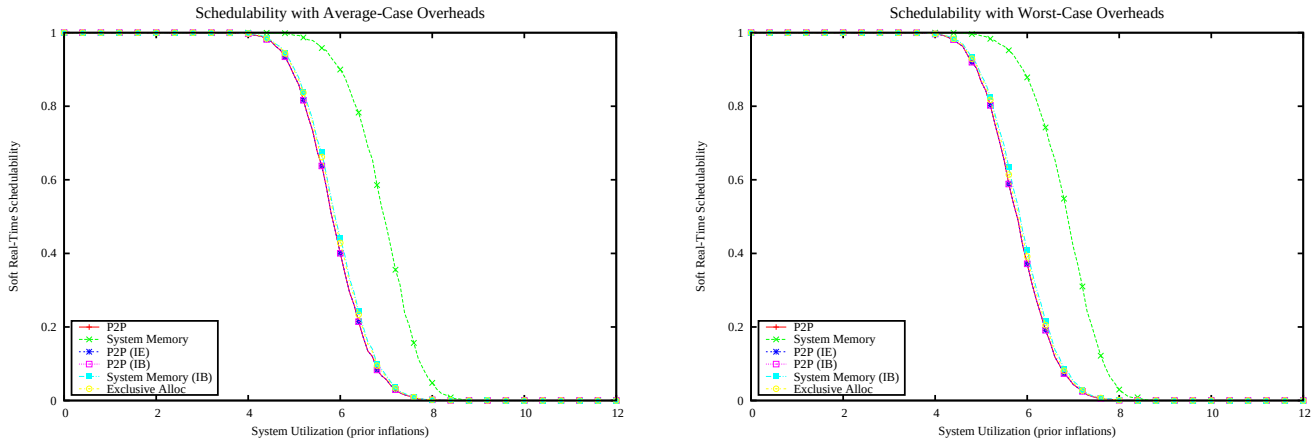

Figure 5915: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

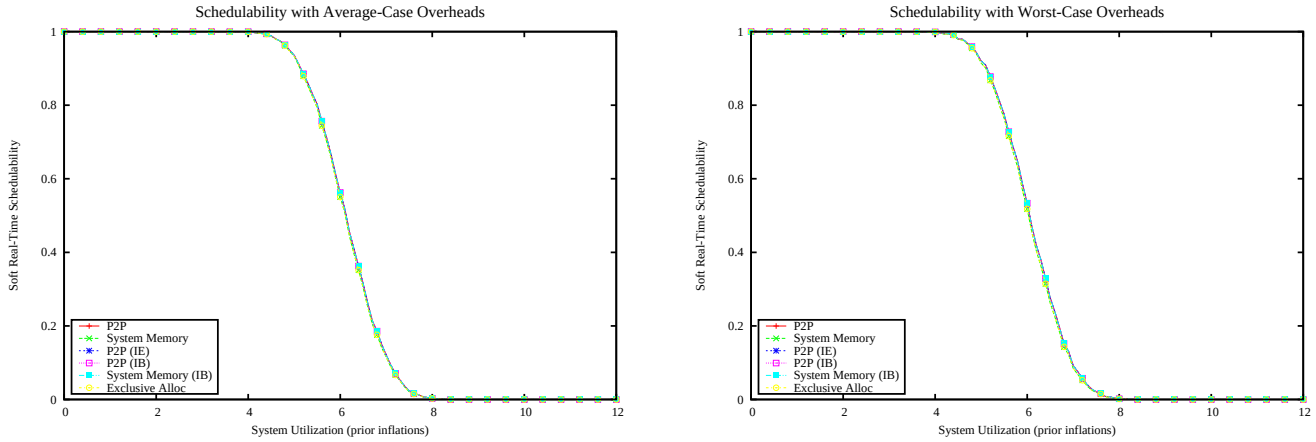

Figure 5916: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

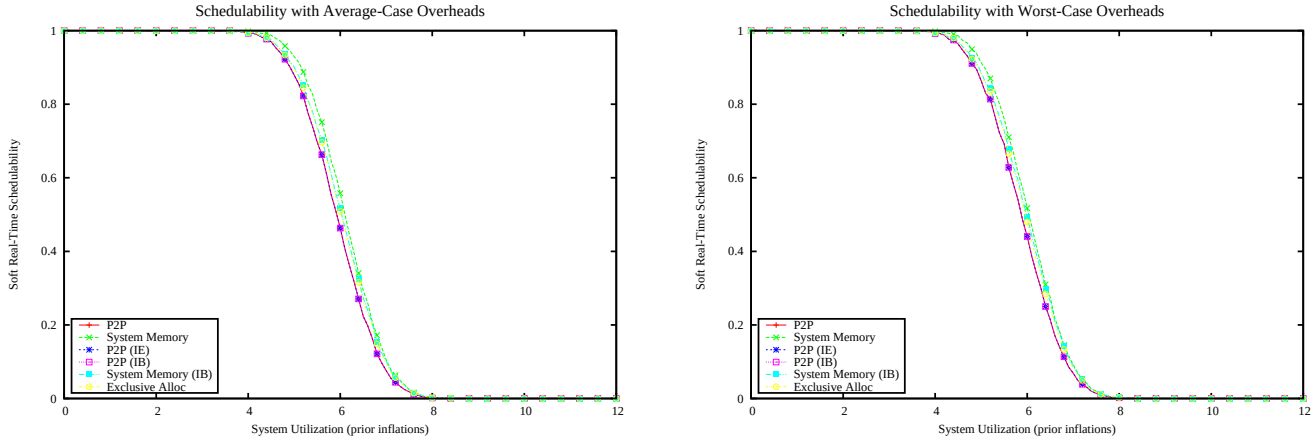

Figure 5917: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

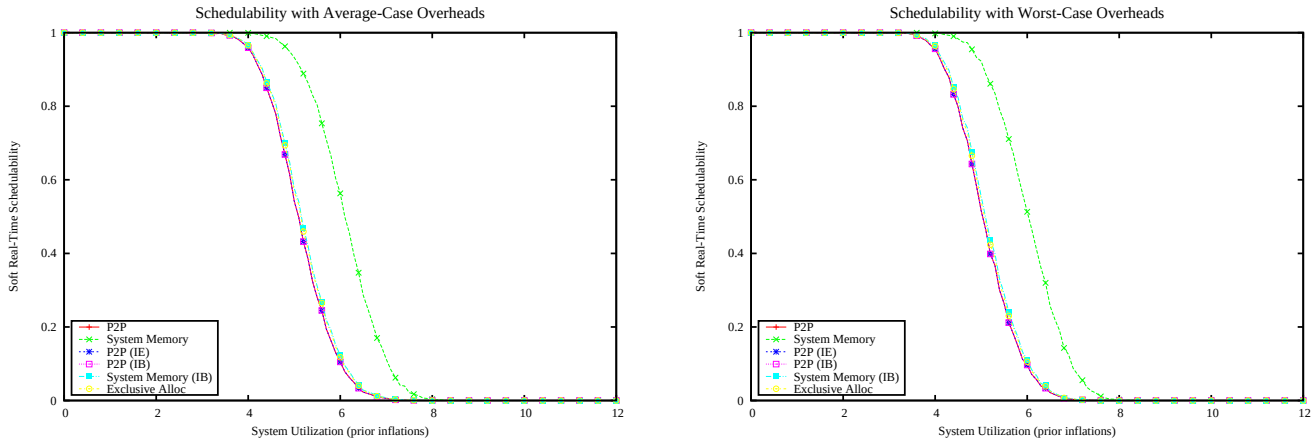

Figure 5918: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

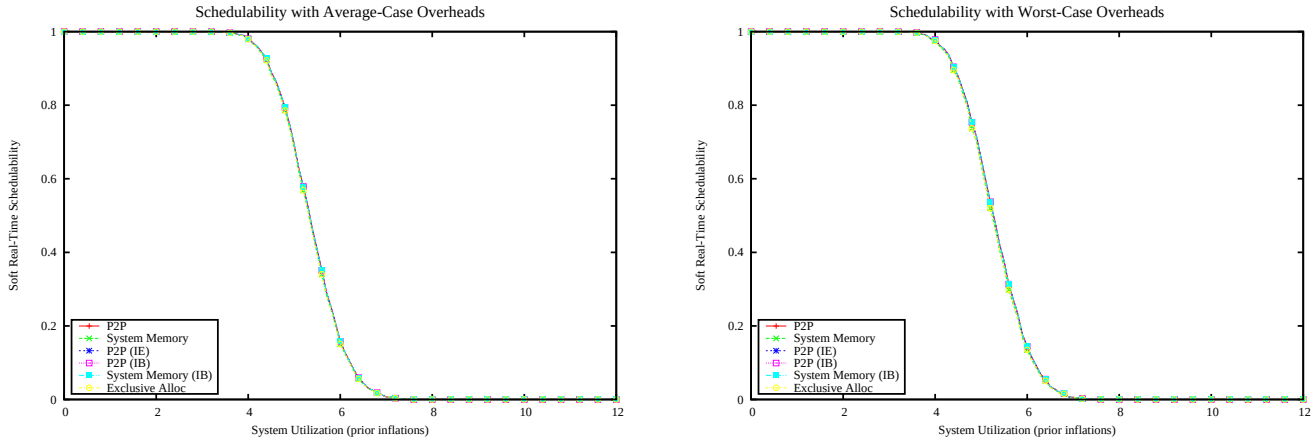

Figure 5919: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

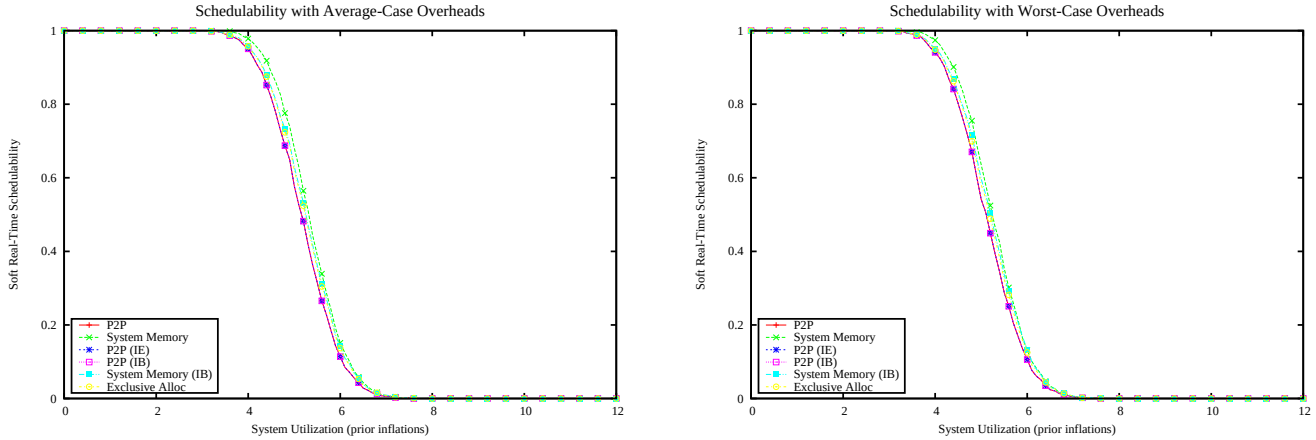

Figure 5920: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

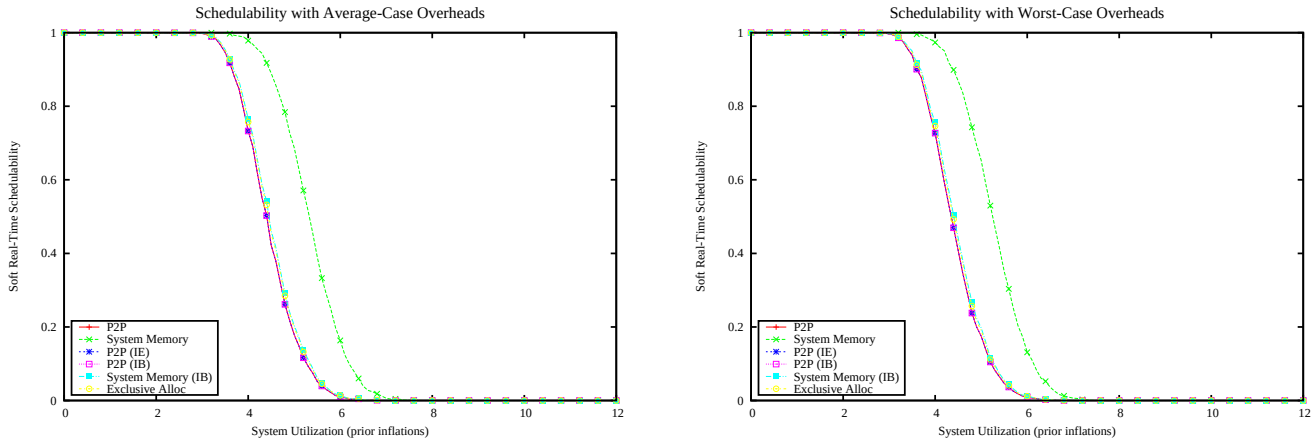

Figure 5921: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

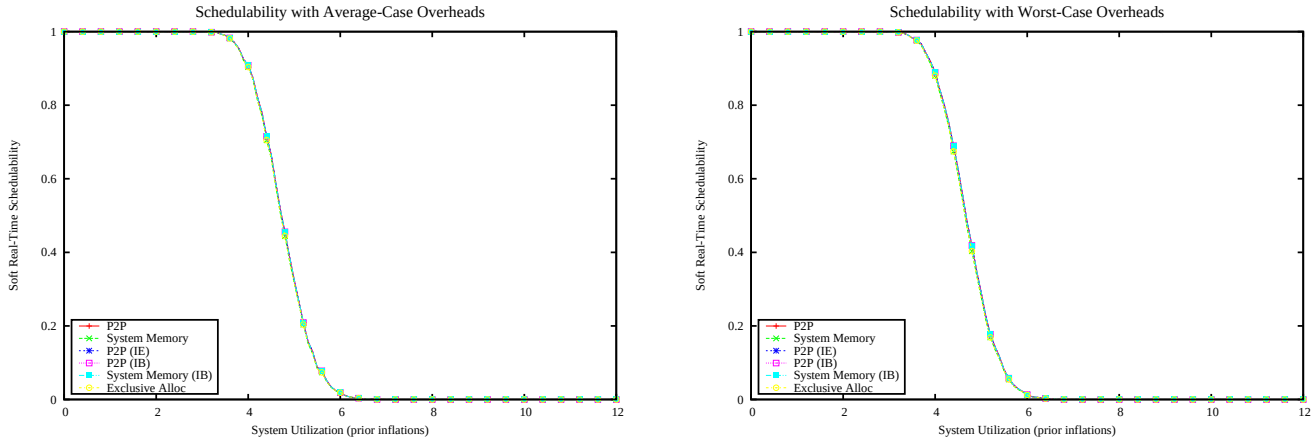

Figure 5922: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

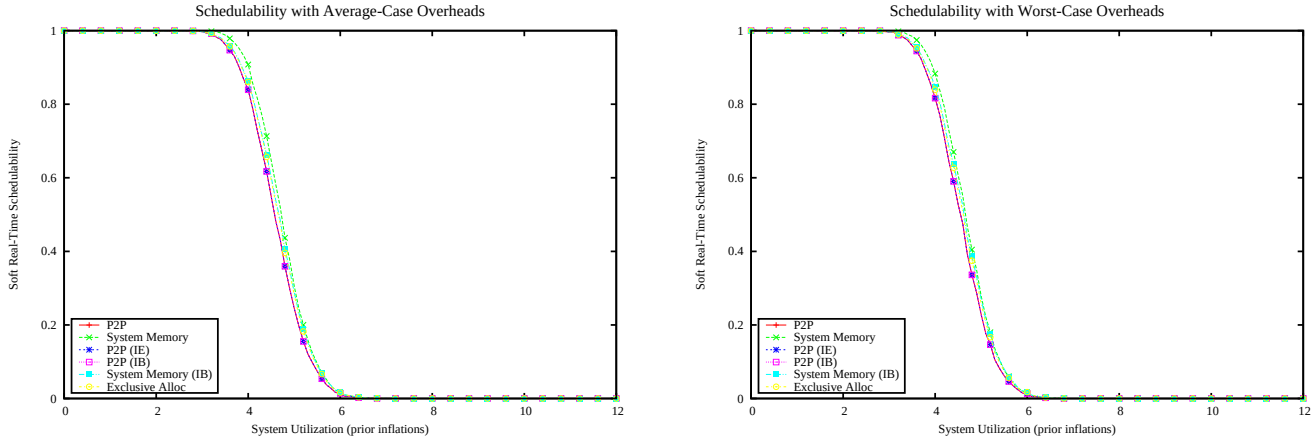

Figure 5923: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

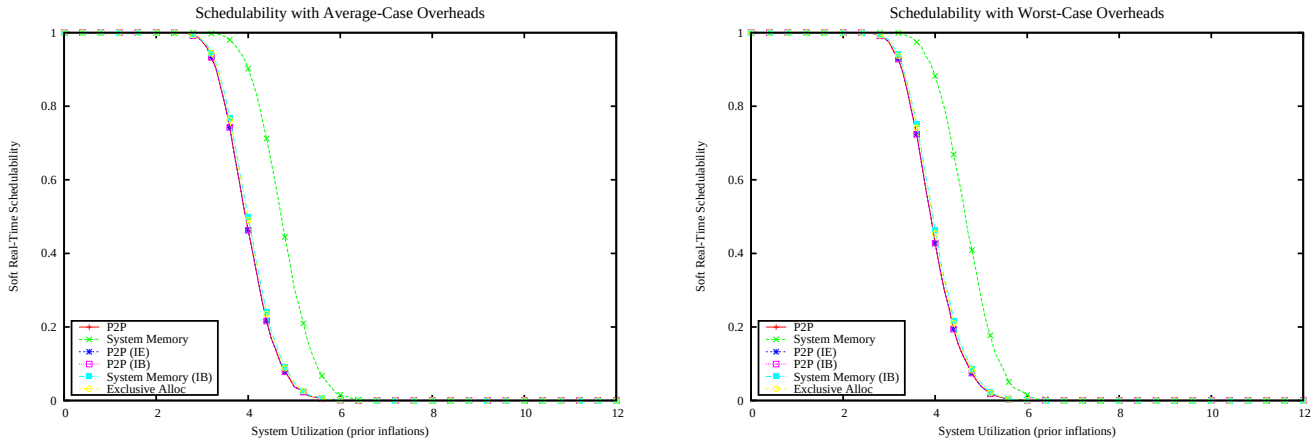

Figure 5924: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

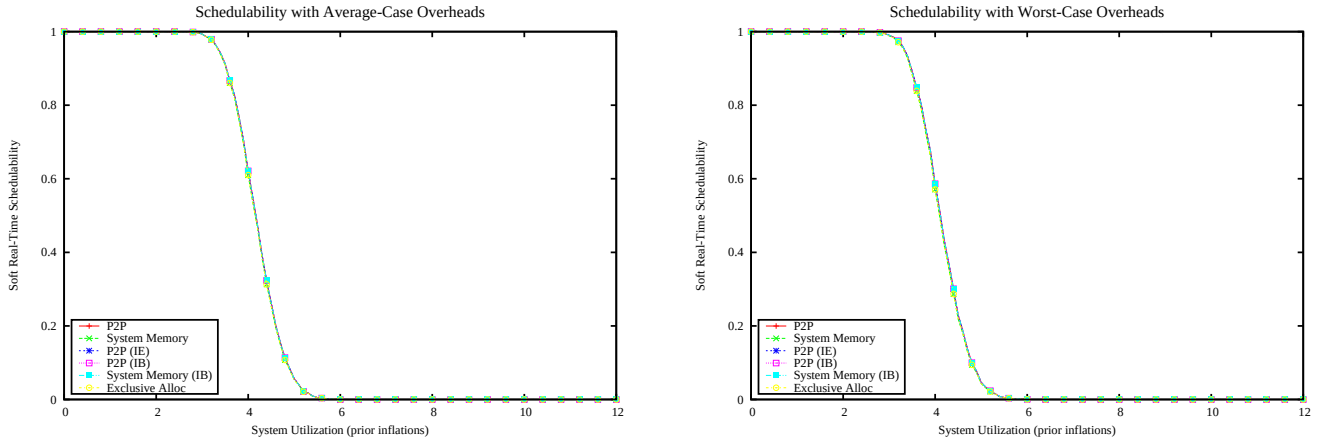

Figure 5925: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

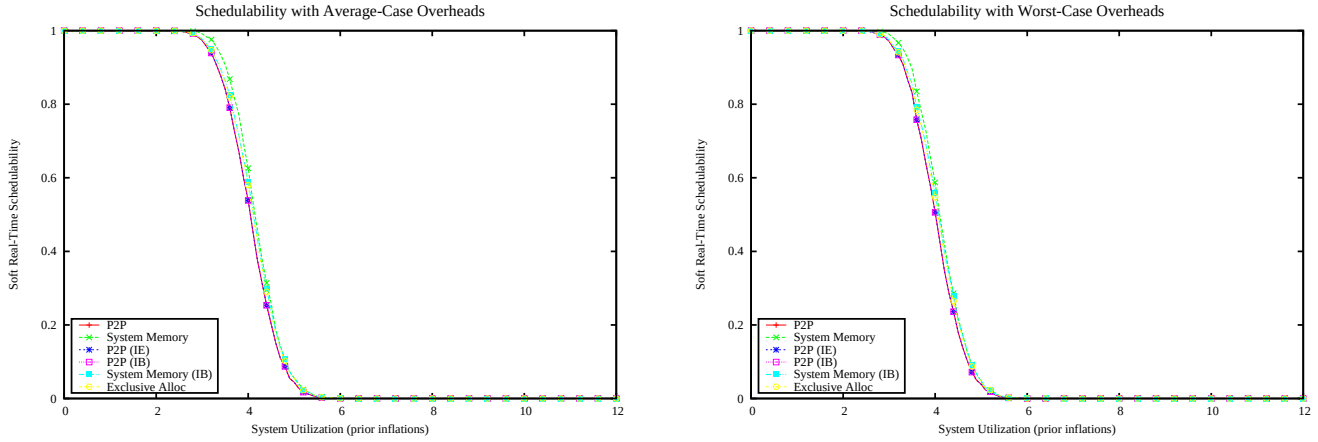

Figure 5926: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

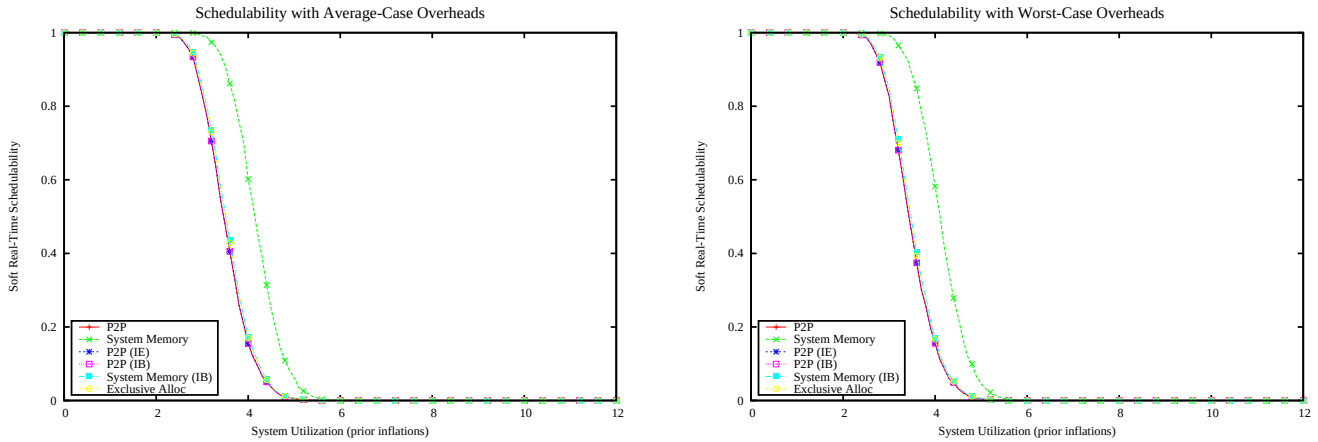

Figure 5927: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

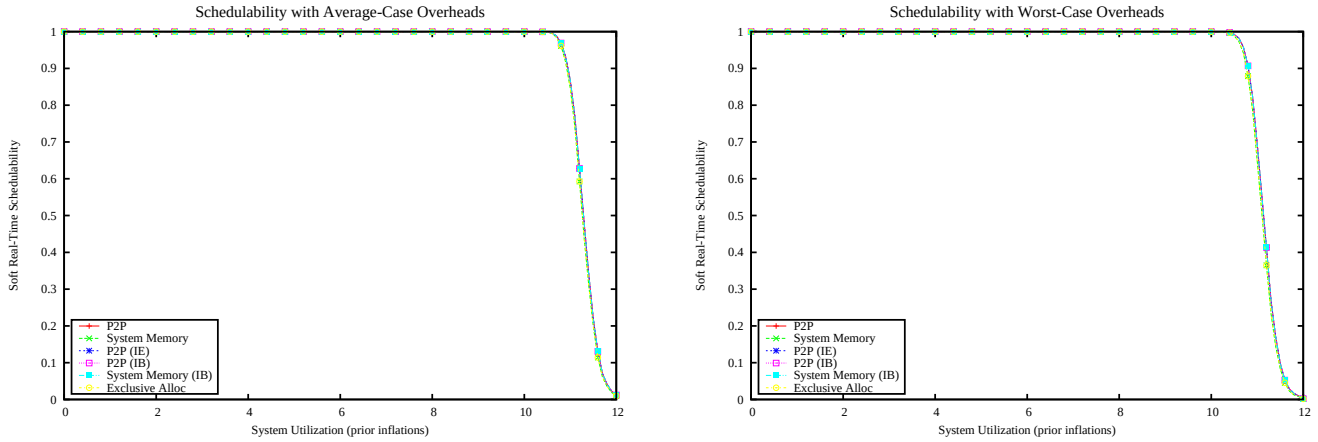

Figure 5928: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

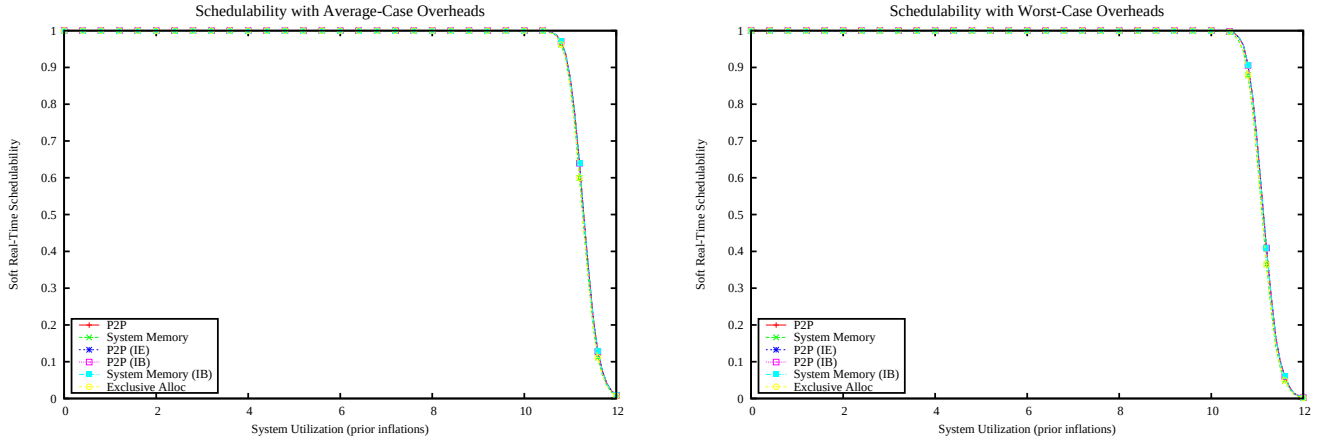

Figure 5929: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

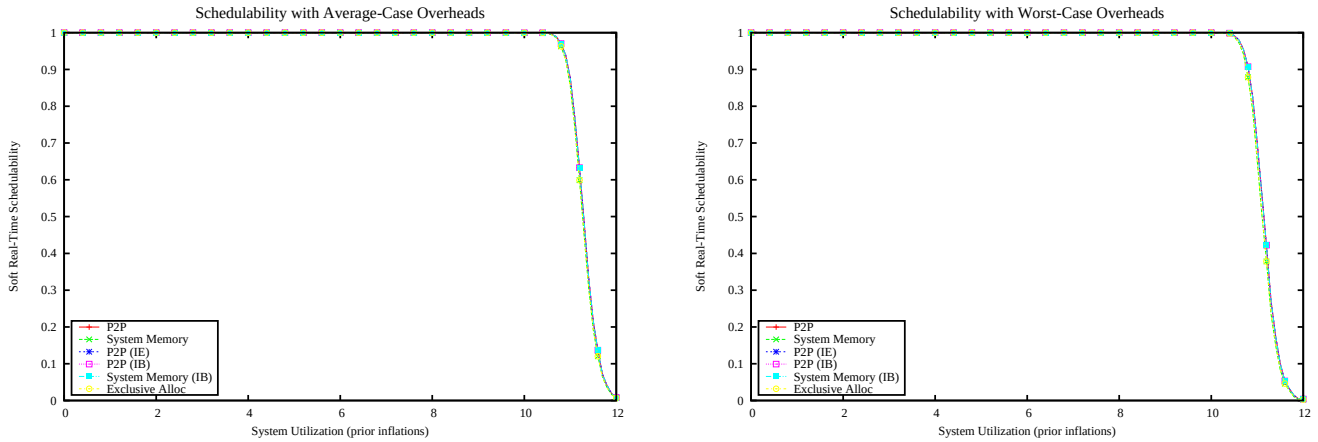

Figure 5930: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

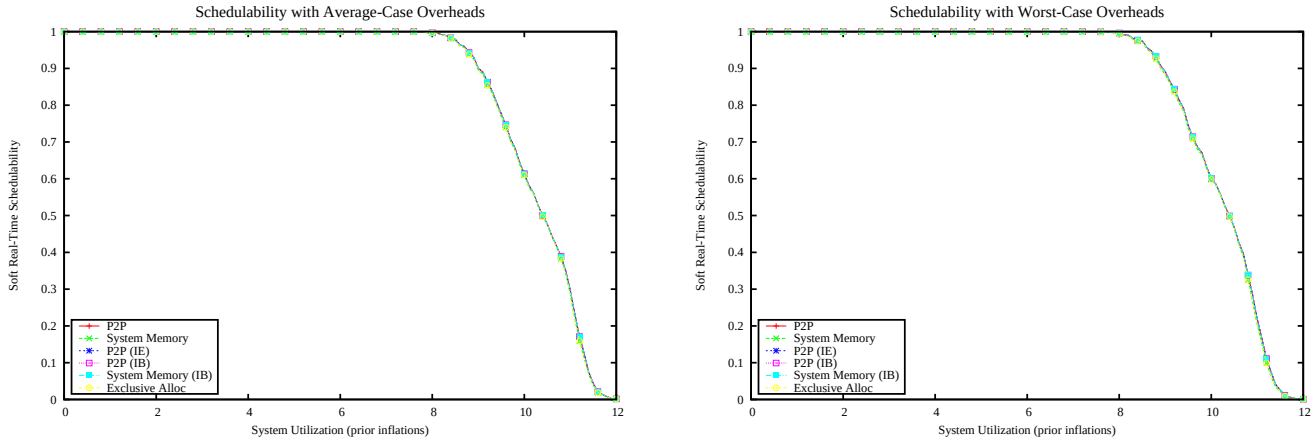

Figure 5931: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

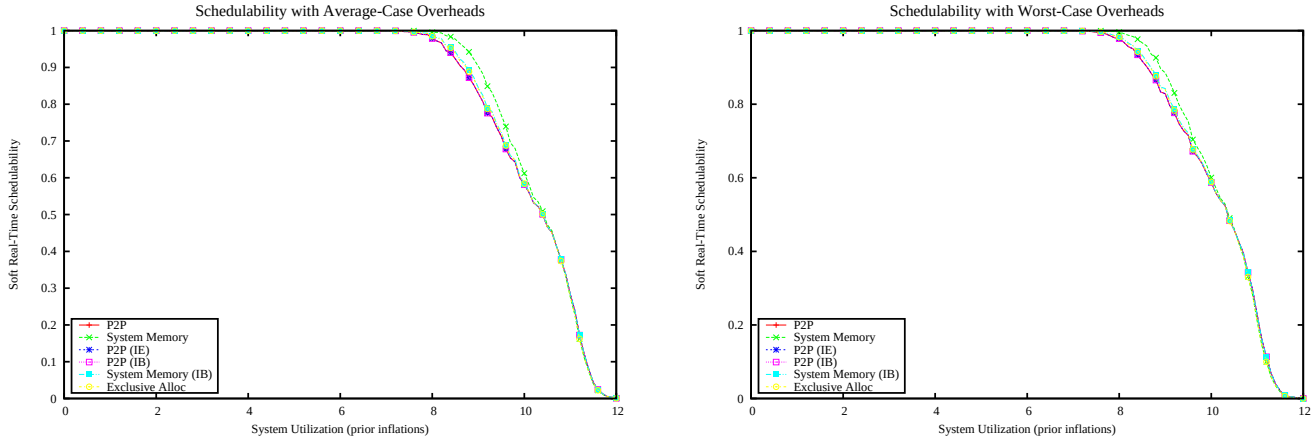

Figure 5932: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

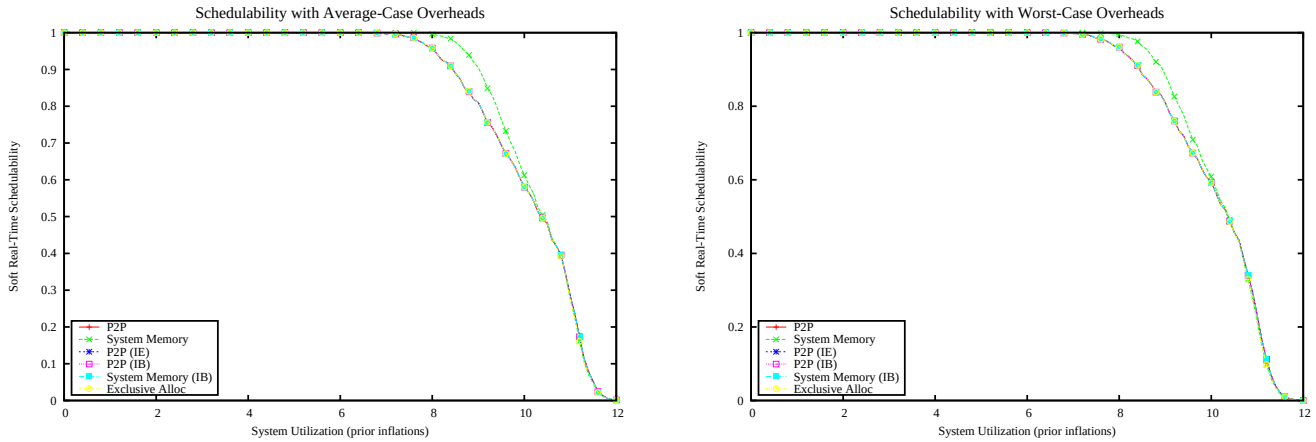

Figure 5933: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

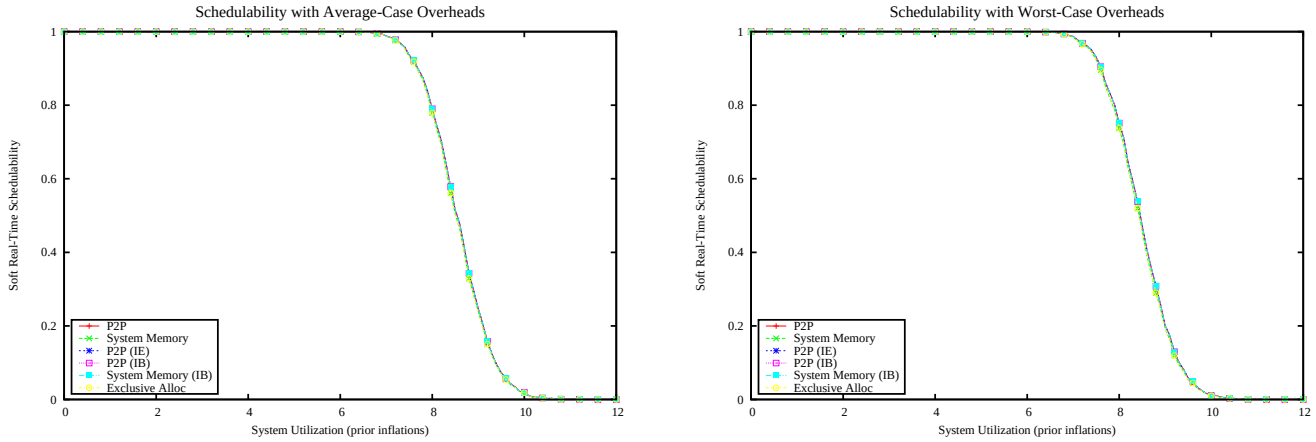

Figure 5934: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

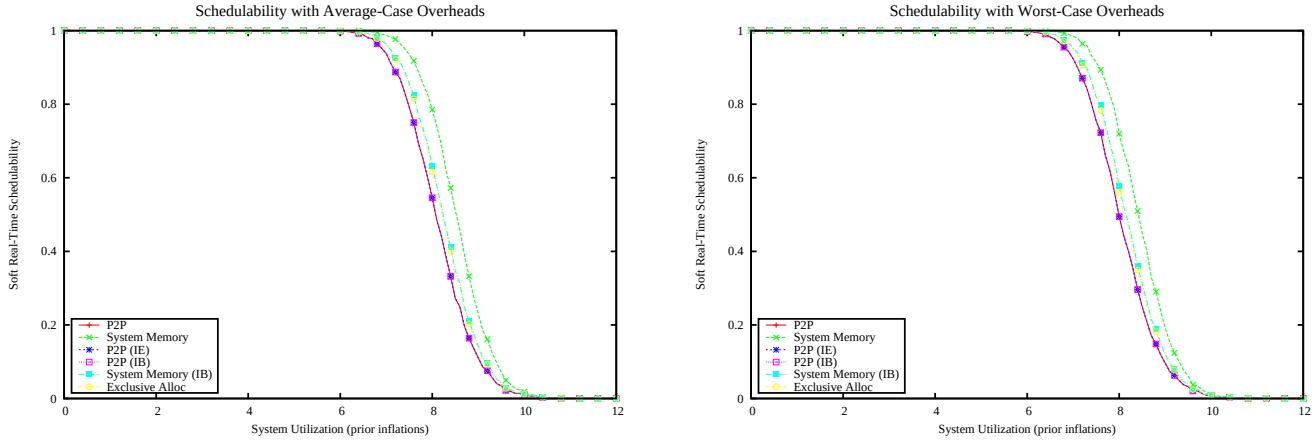

Figure 5935: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

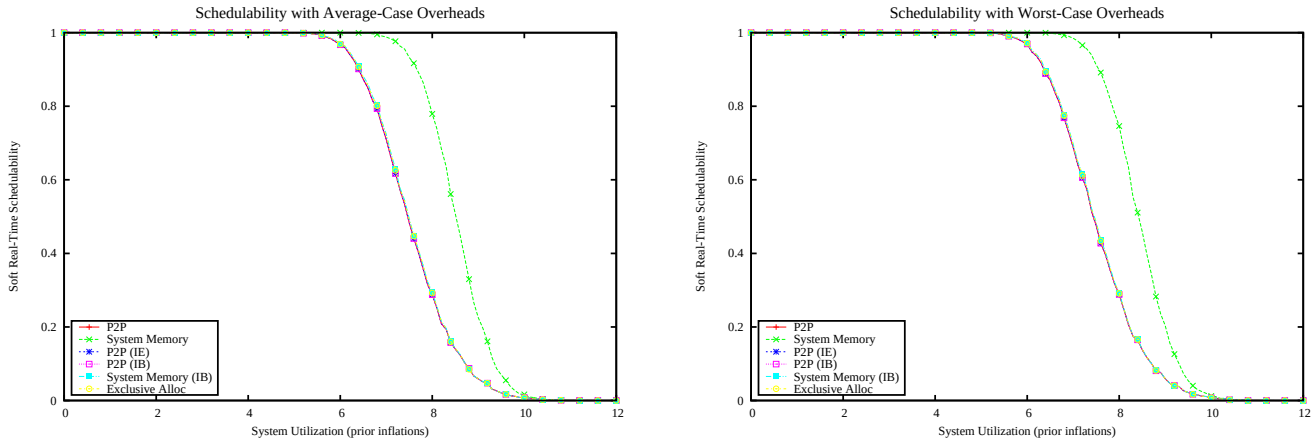

Figure 5936: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

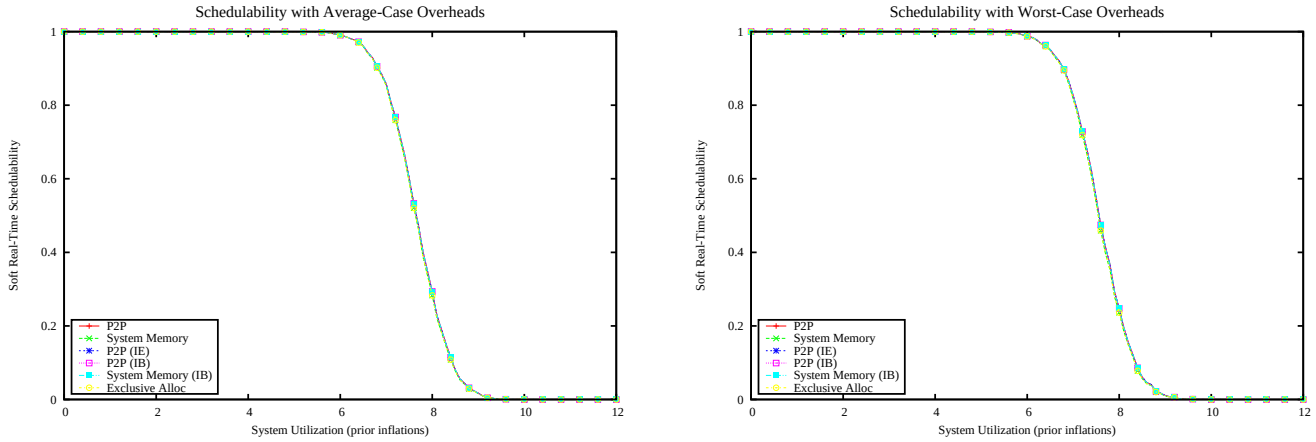

Figure 5937: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

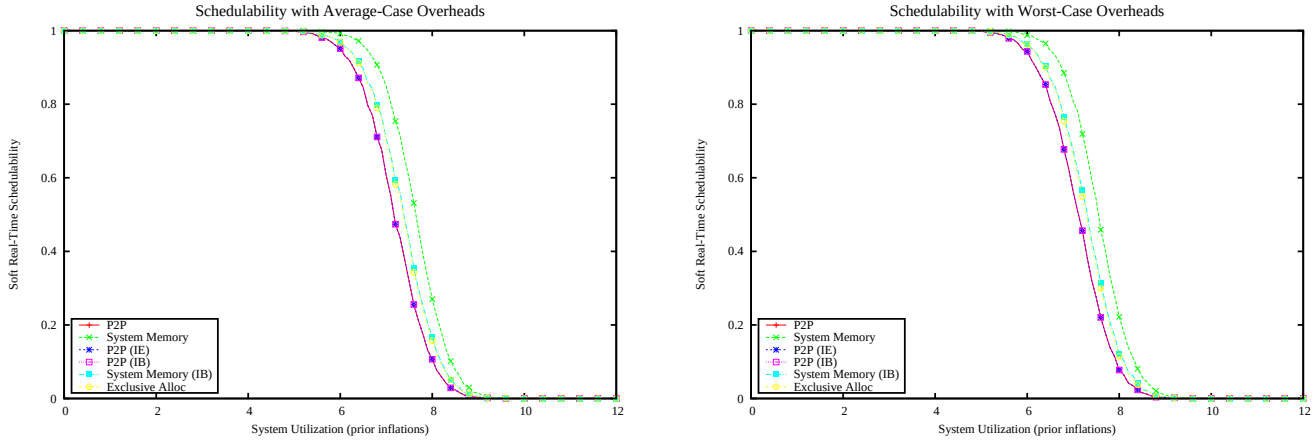

Figure 5938: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

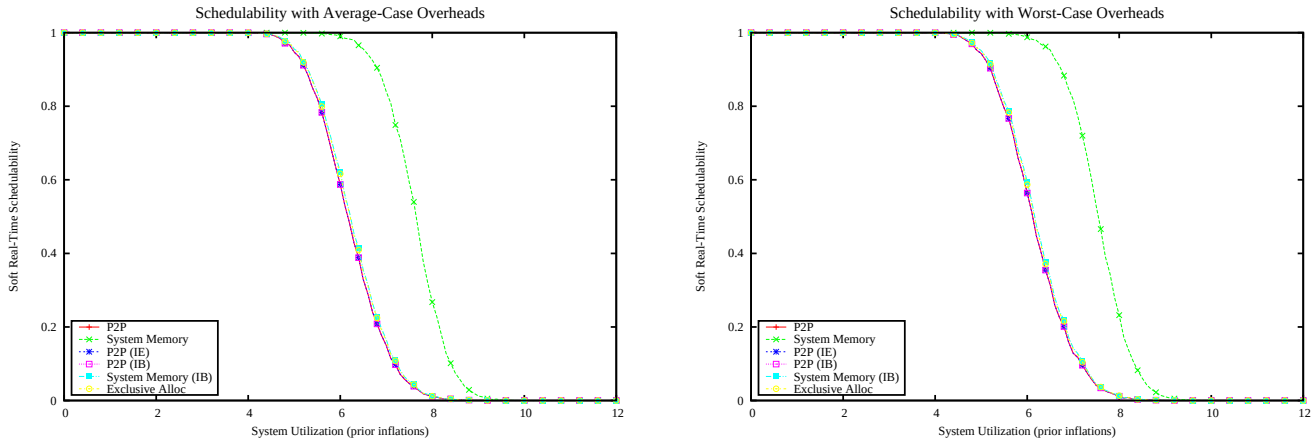

Figure 5939: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

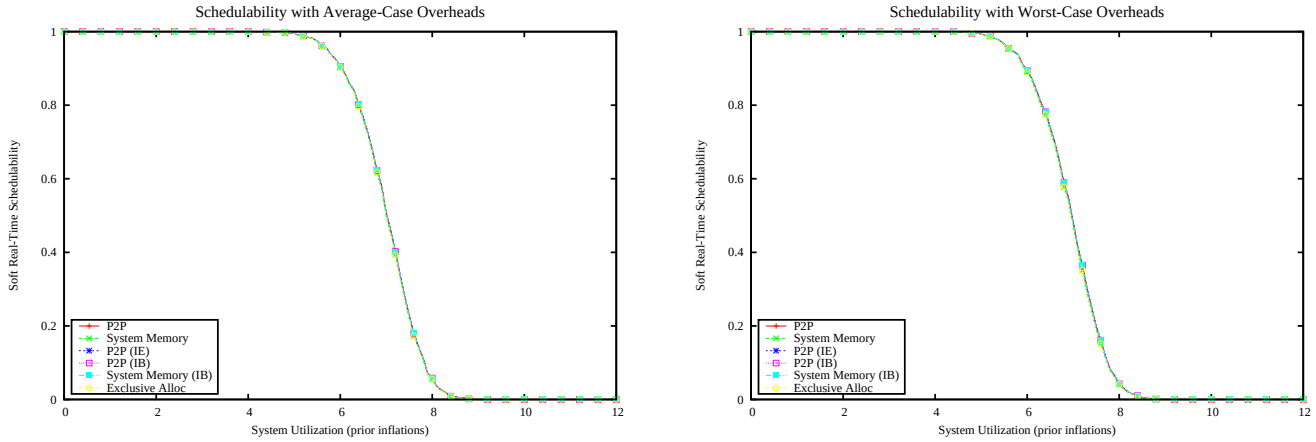

Figure 5940: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

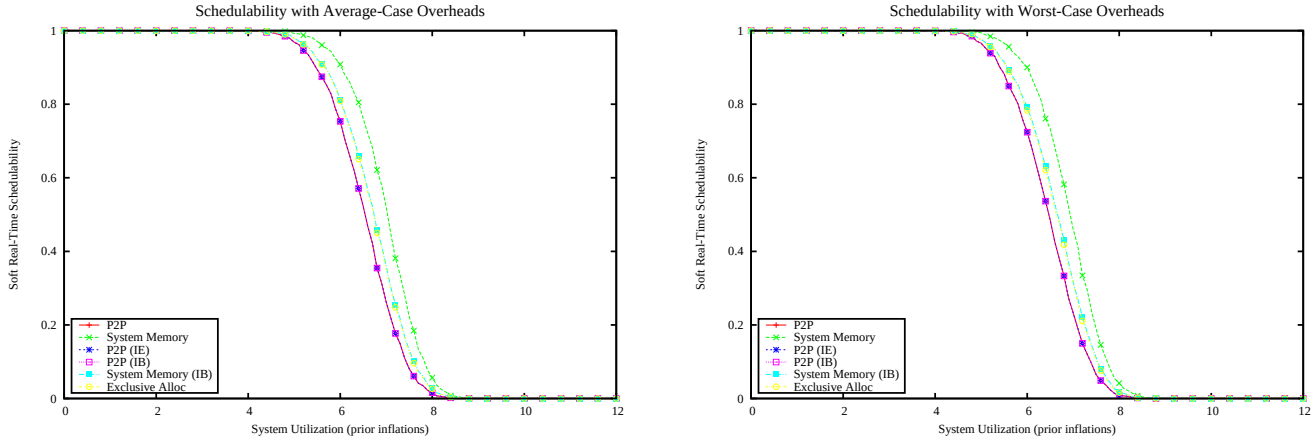

Figure 5941: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

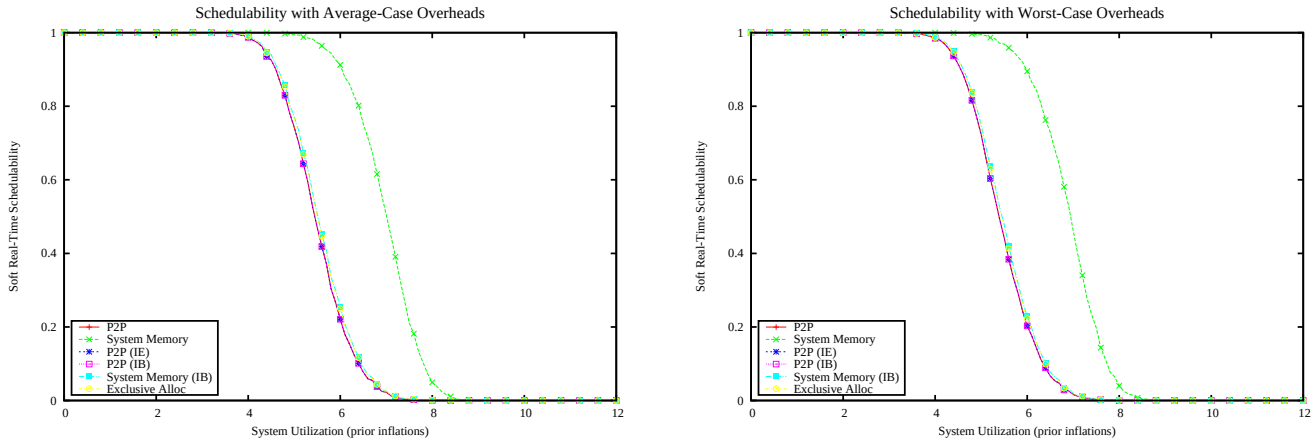

Figure 5942: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

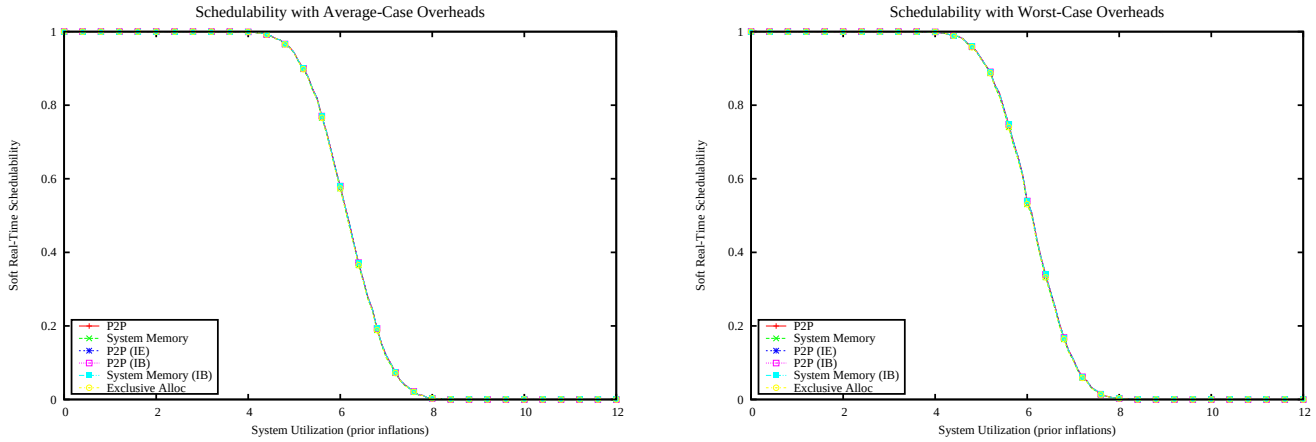

Figure 5943: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

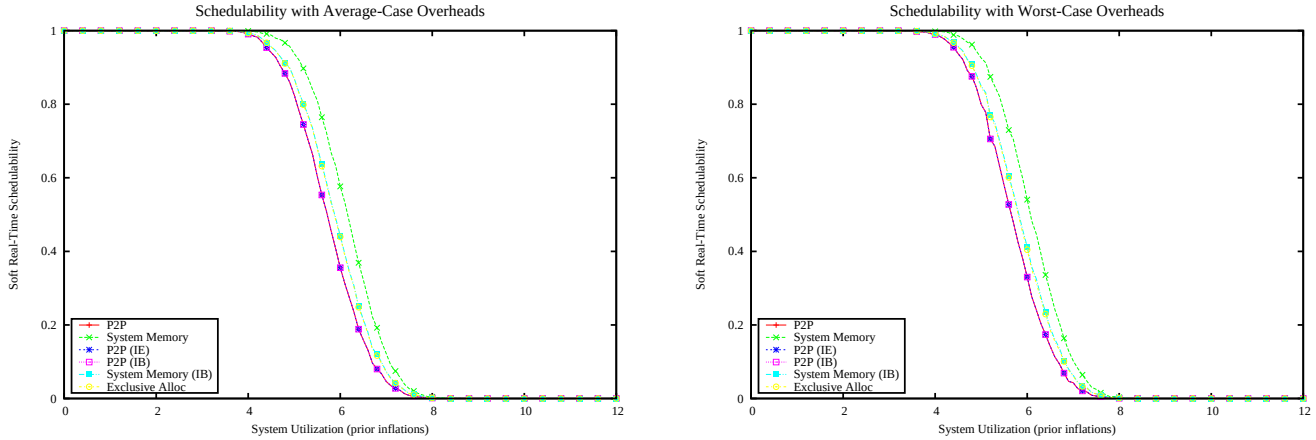

Figure 5944: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

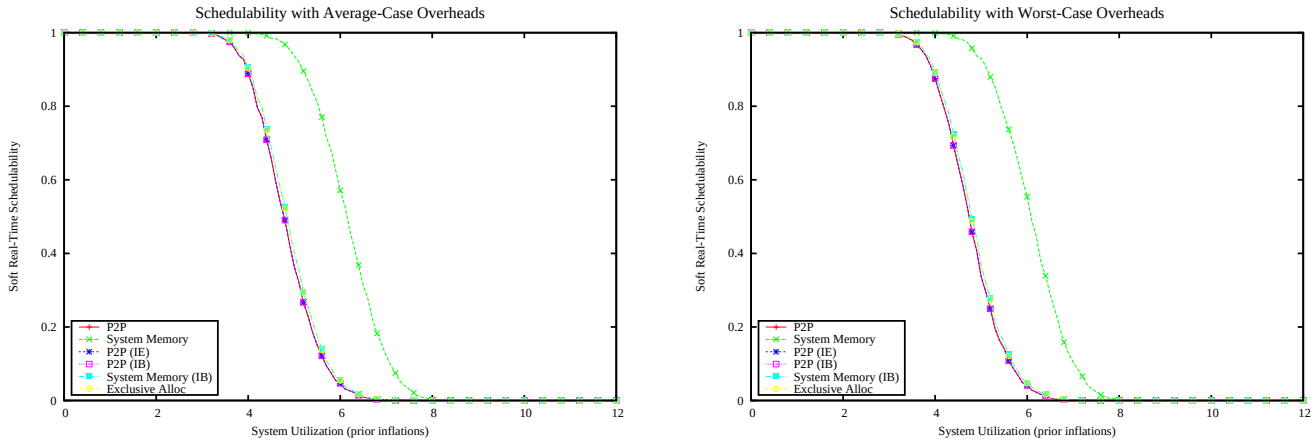

Figure 5945: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

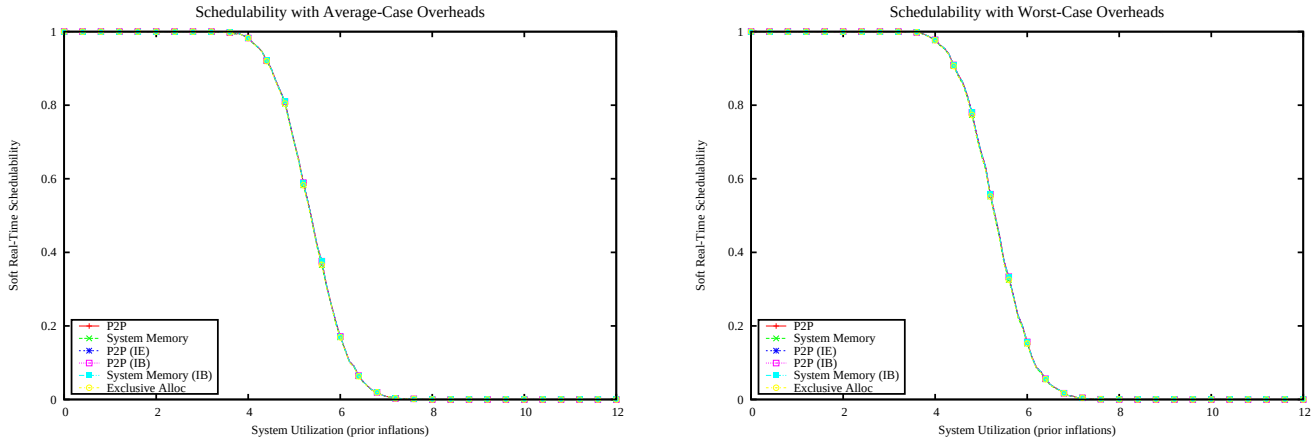

Figure 5946: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

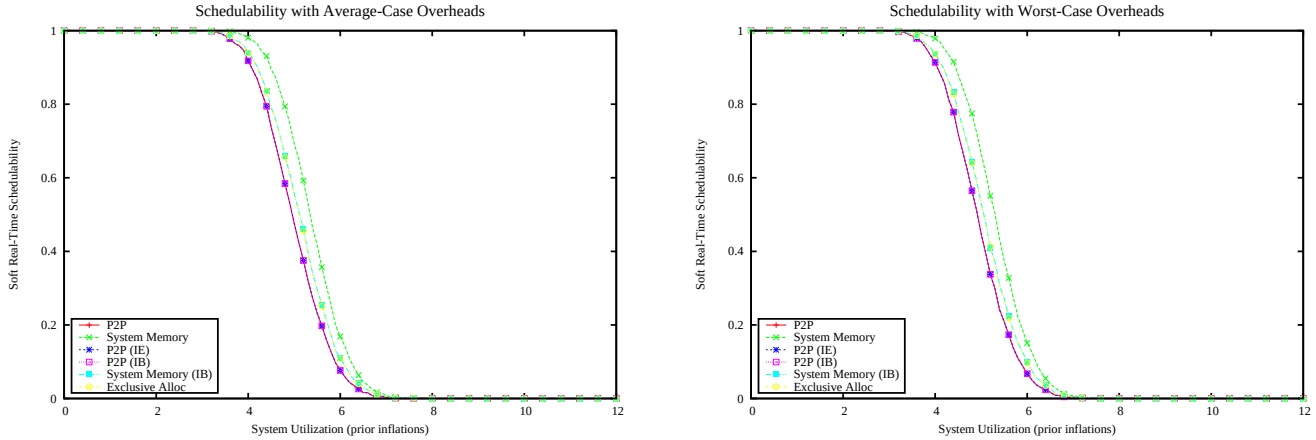

Figure 5947: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

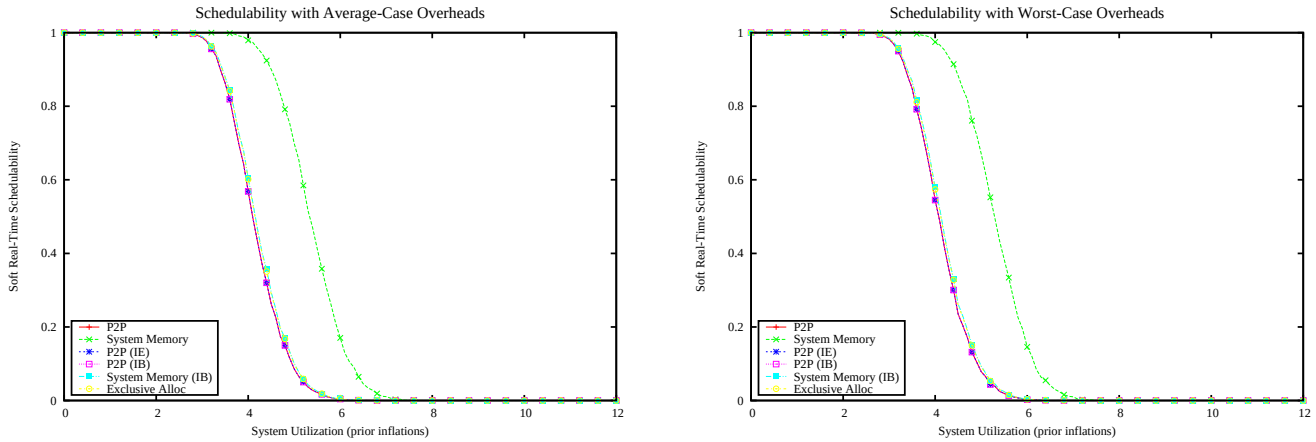

Figure 5948: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

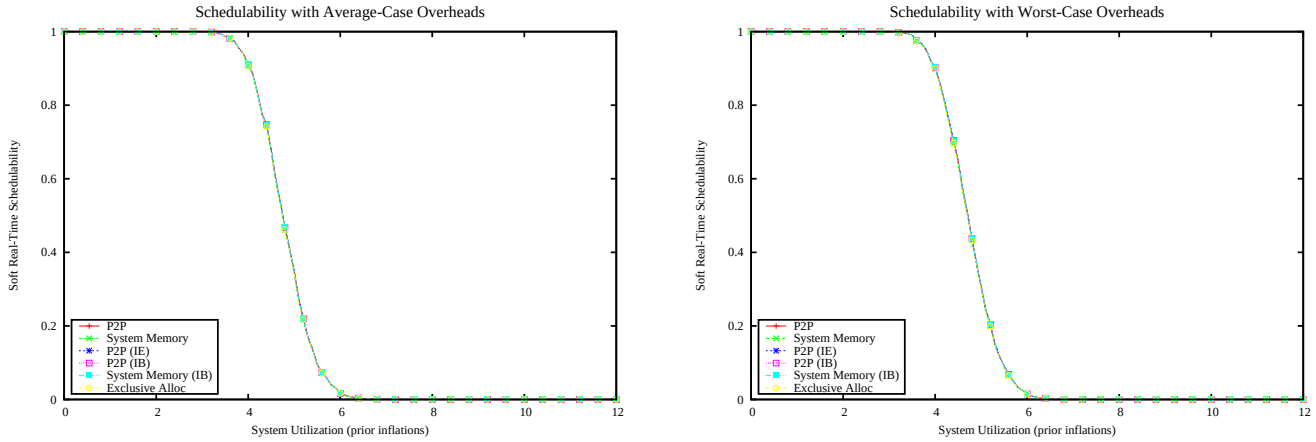

Figure 5949: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

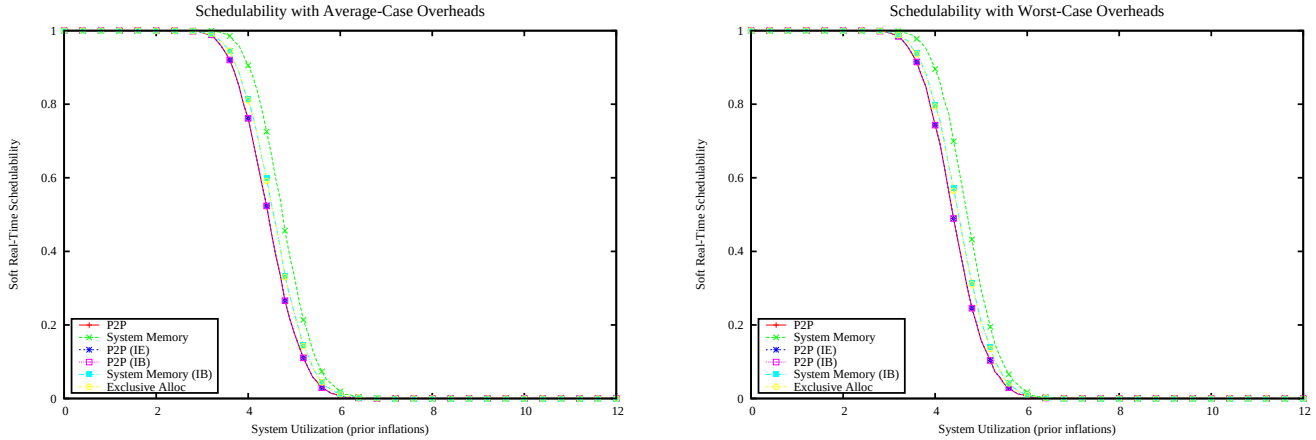

Figure 5950: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

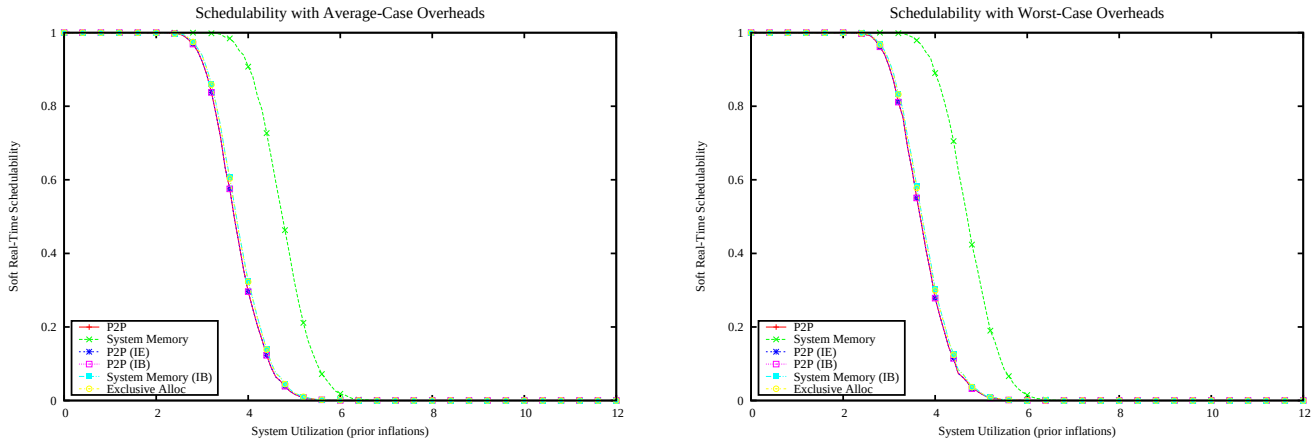

Figure 5951: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

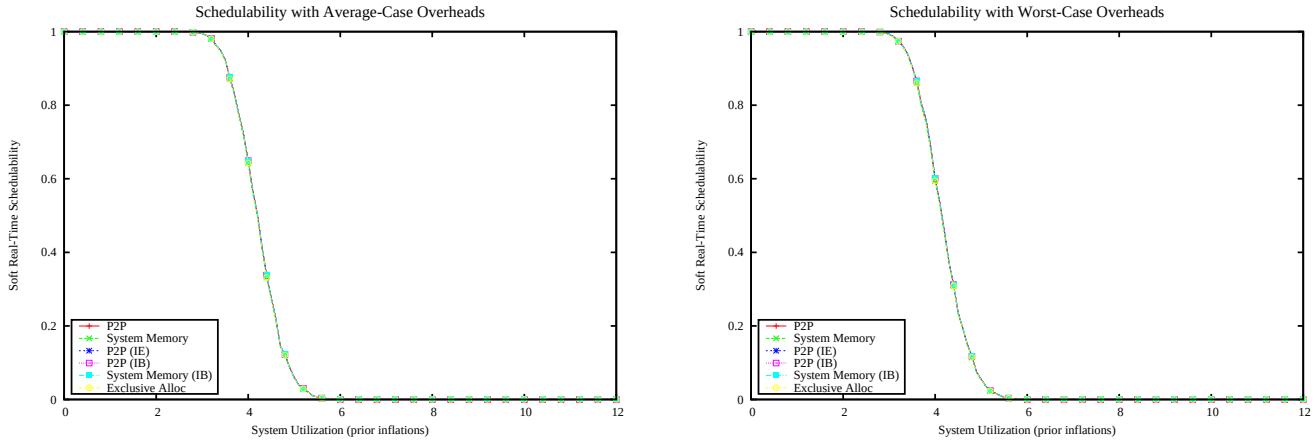

Figure 5952: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

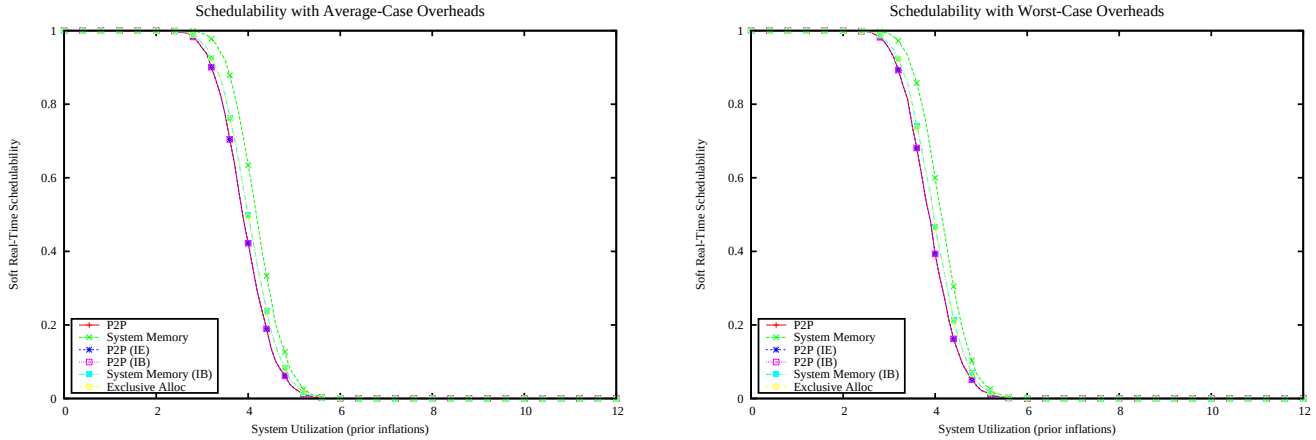

Figure 5953: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

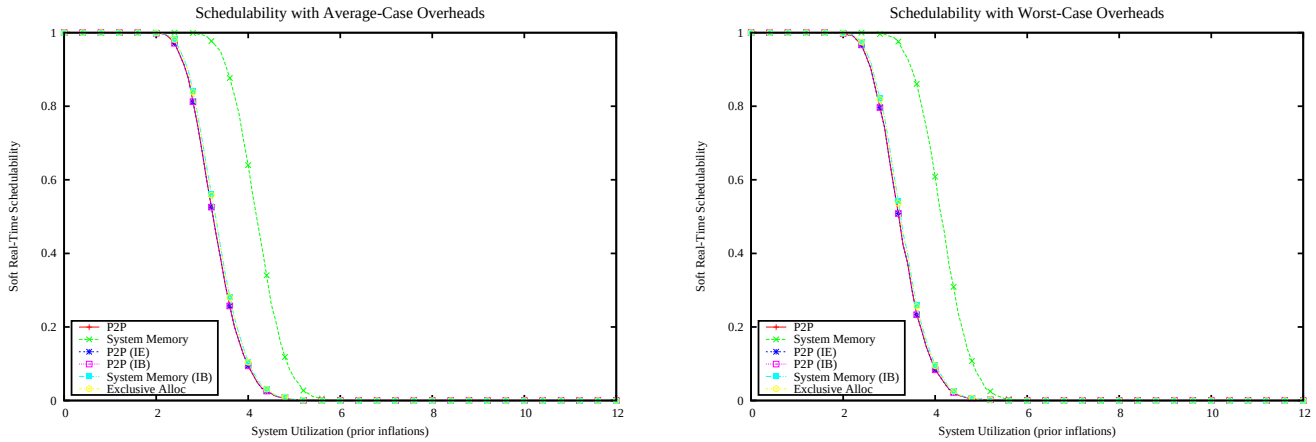

Figure 5954: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

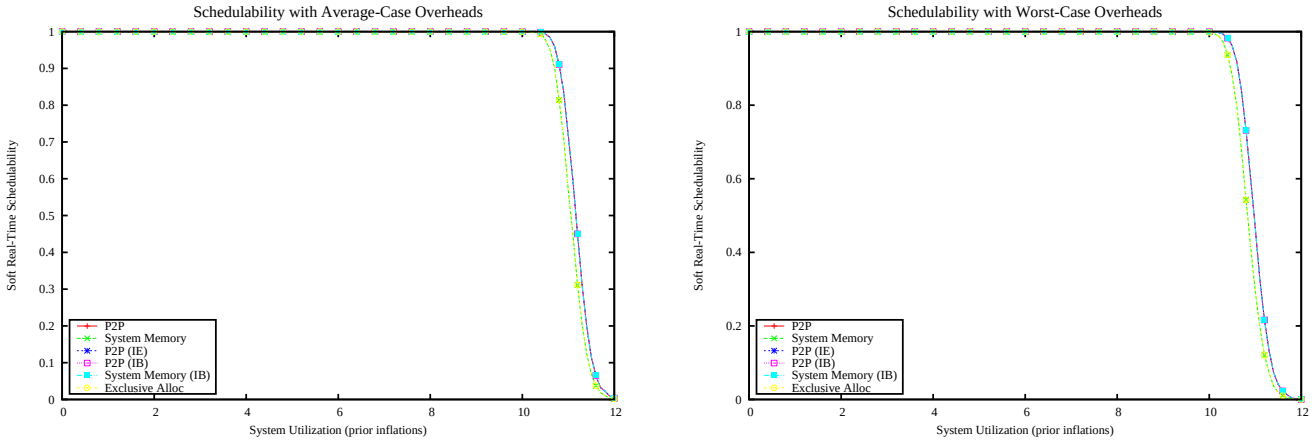

Figure 5955: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

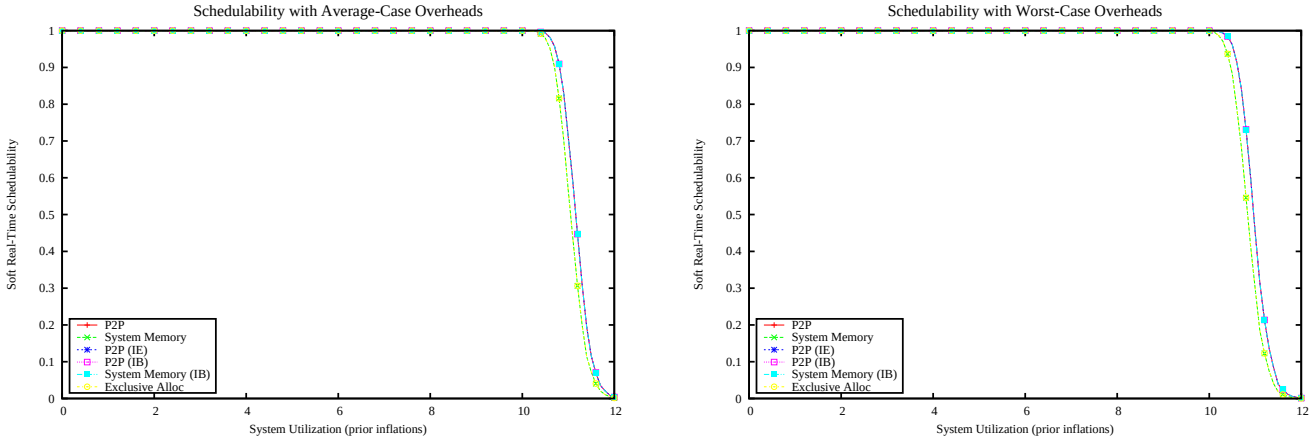

Figure 5956: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

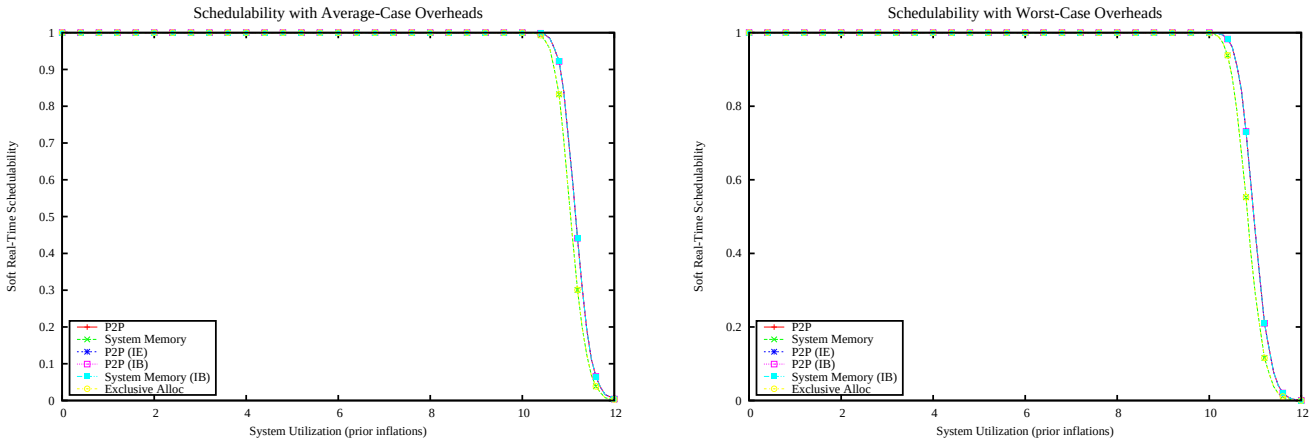

Figure 5957: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

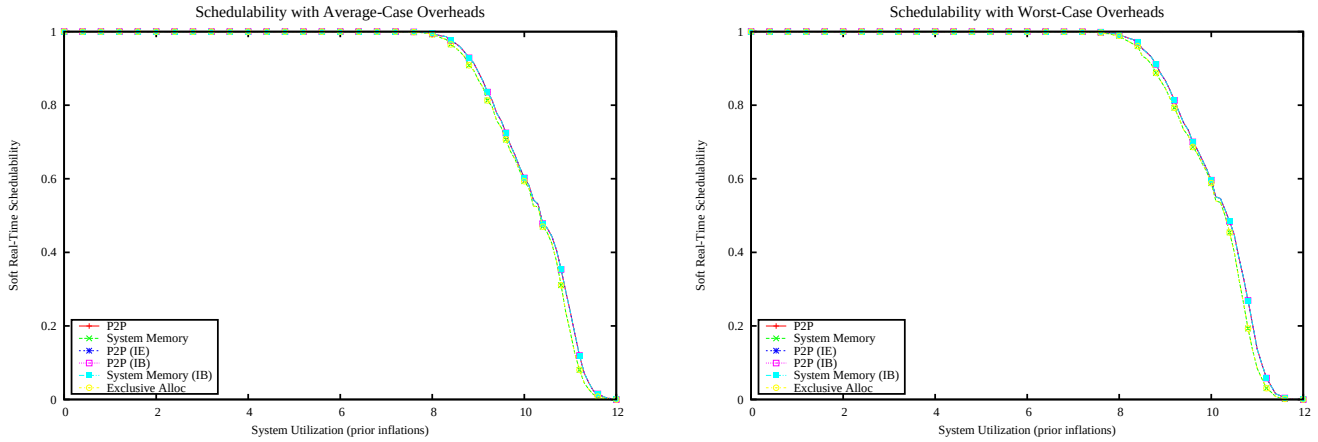

Figure 5958: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

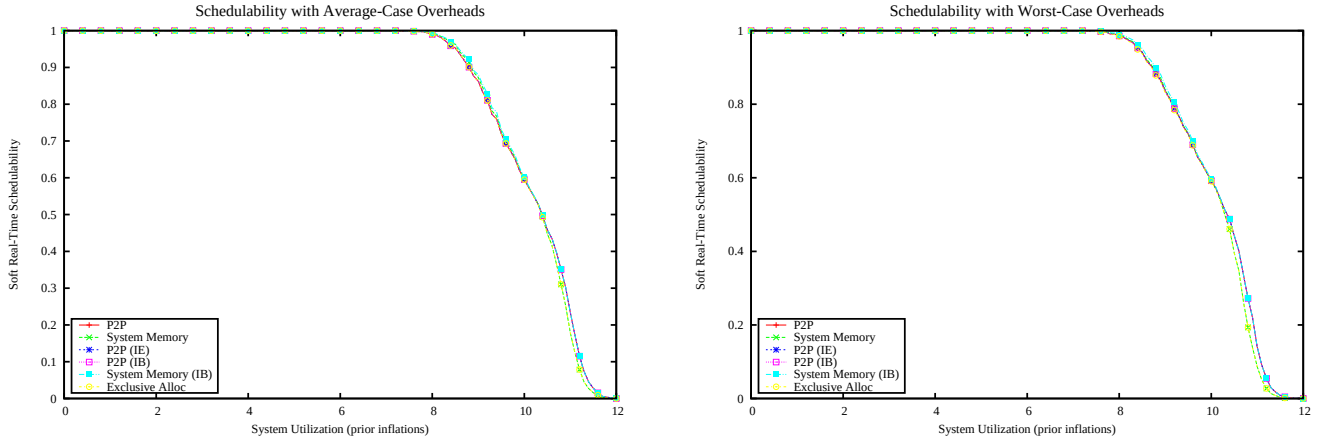

Figure 5959: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

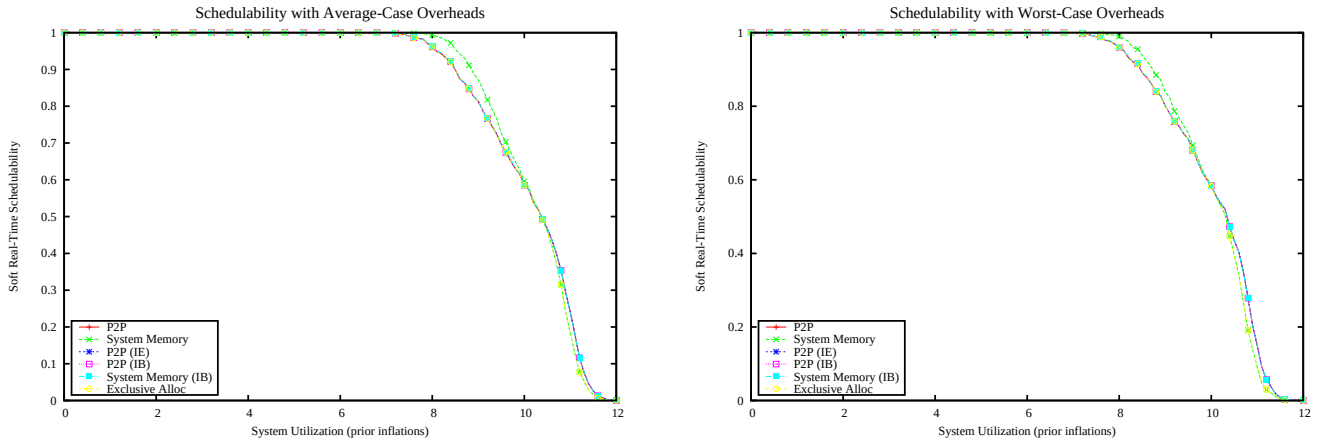

Figure 5960: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

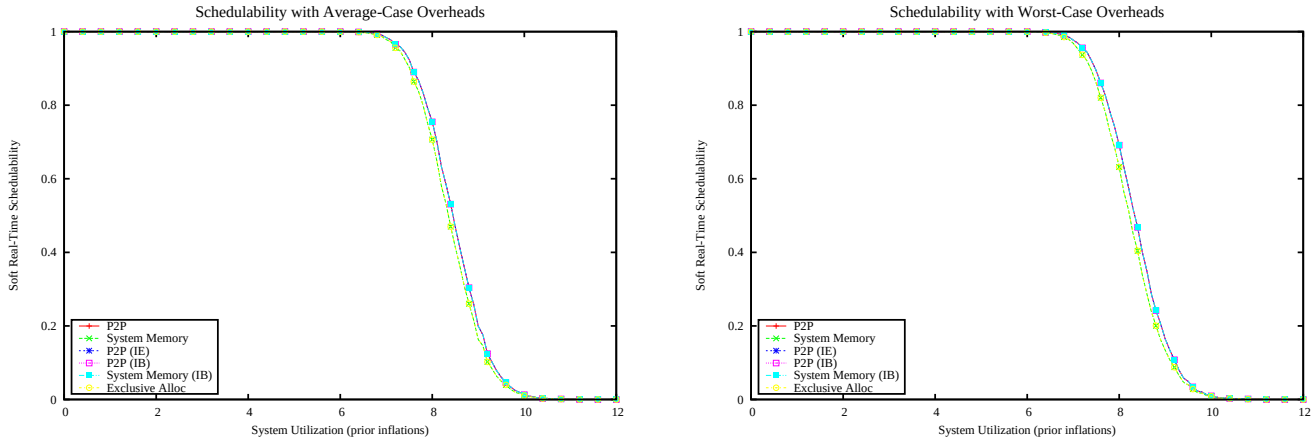

Figure 5961: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

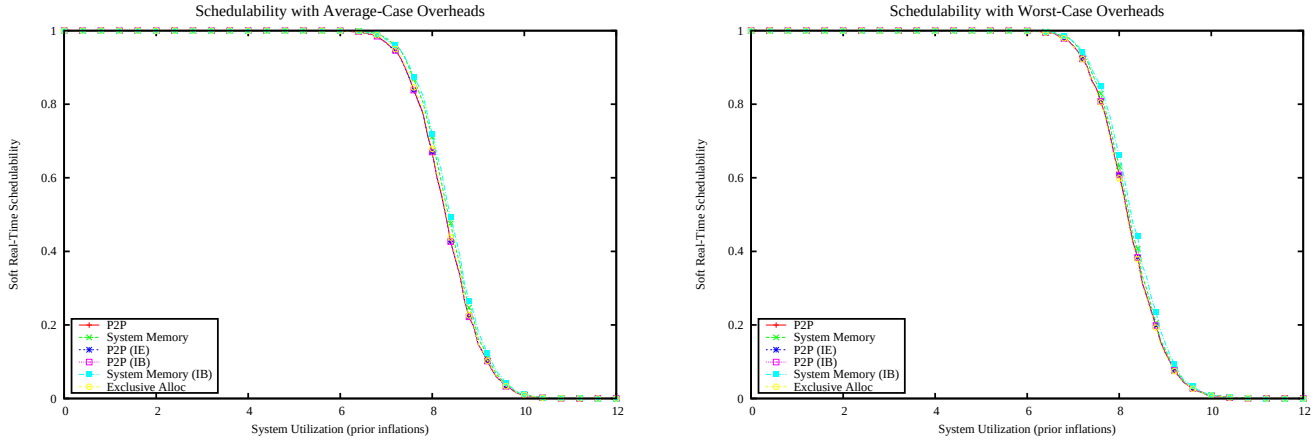

Figure 5962: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

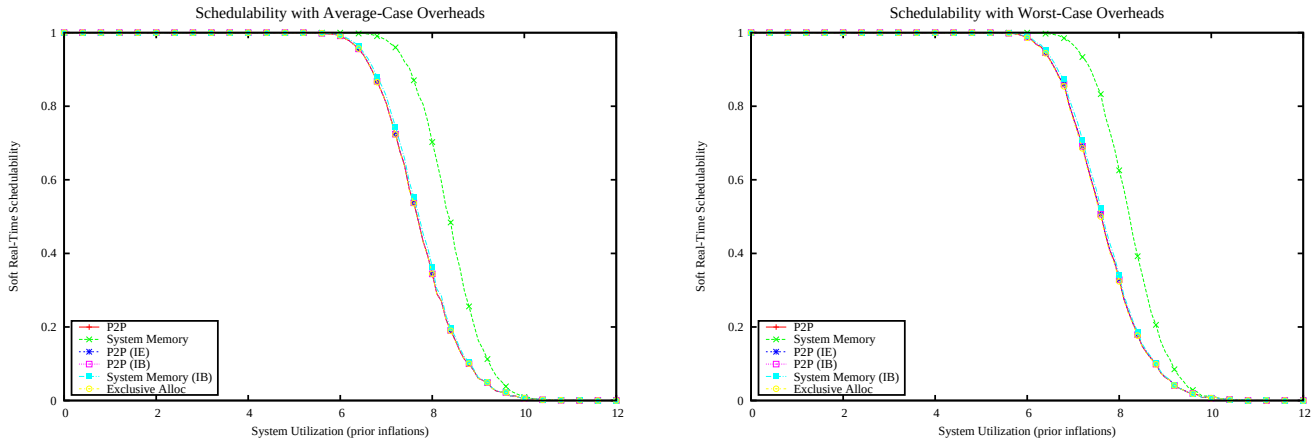

Figure 5963: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

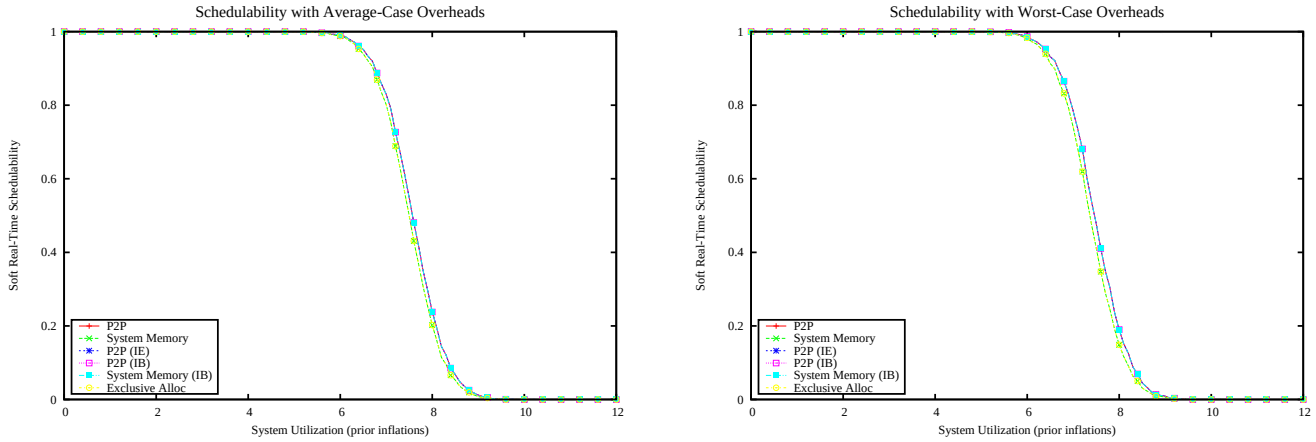

Figure 5964: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

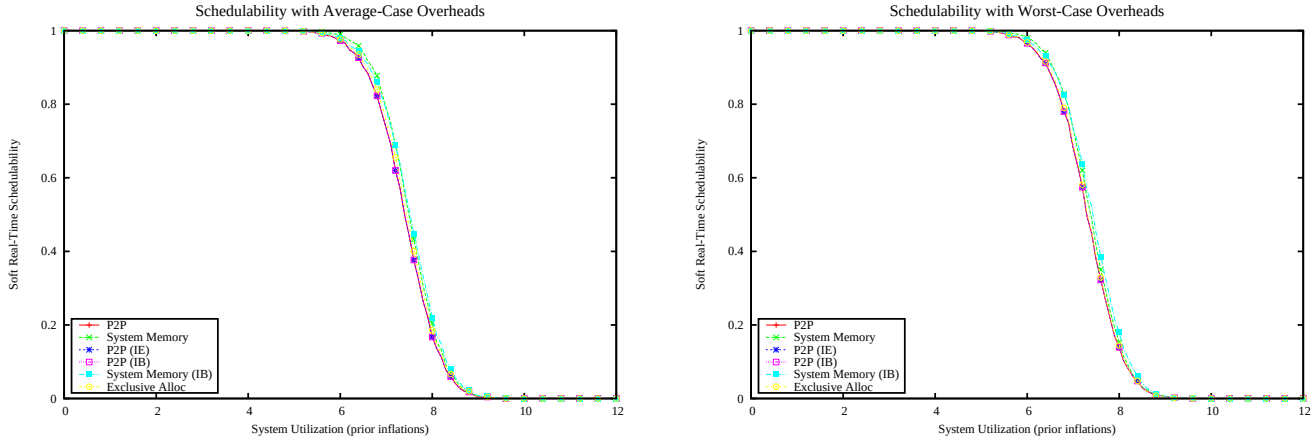

Figure 5965: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

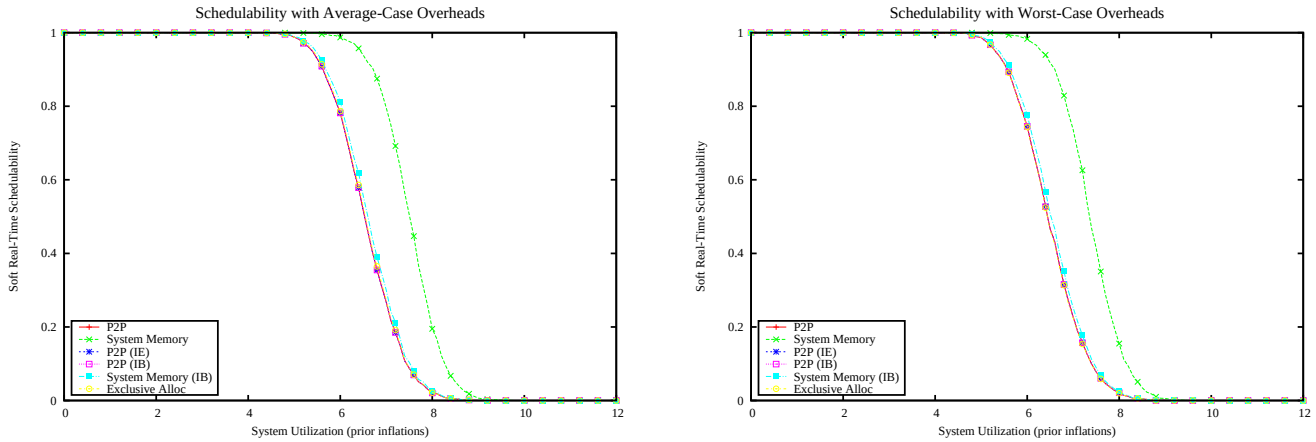

Figure 5966: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

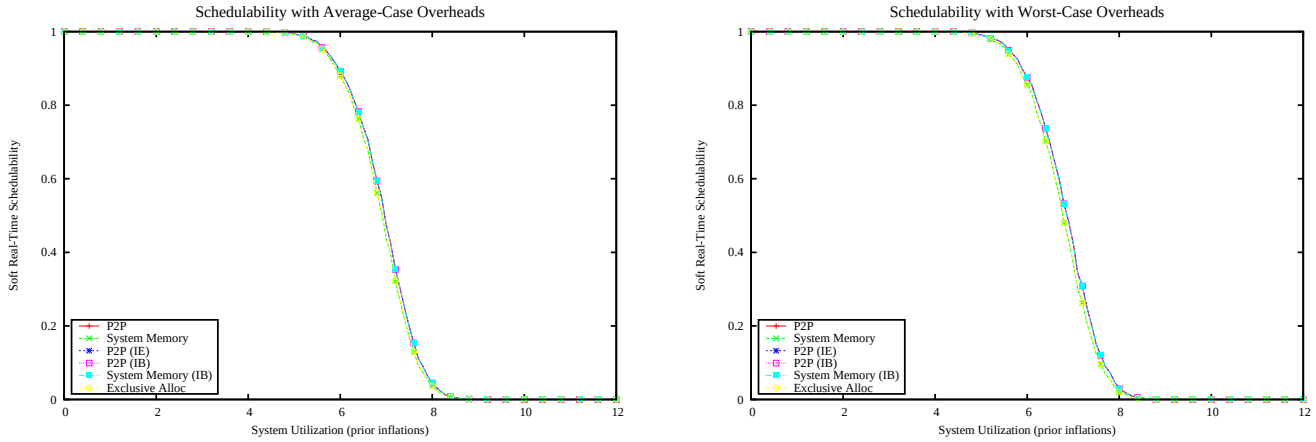

Figure 5967: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

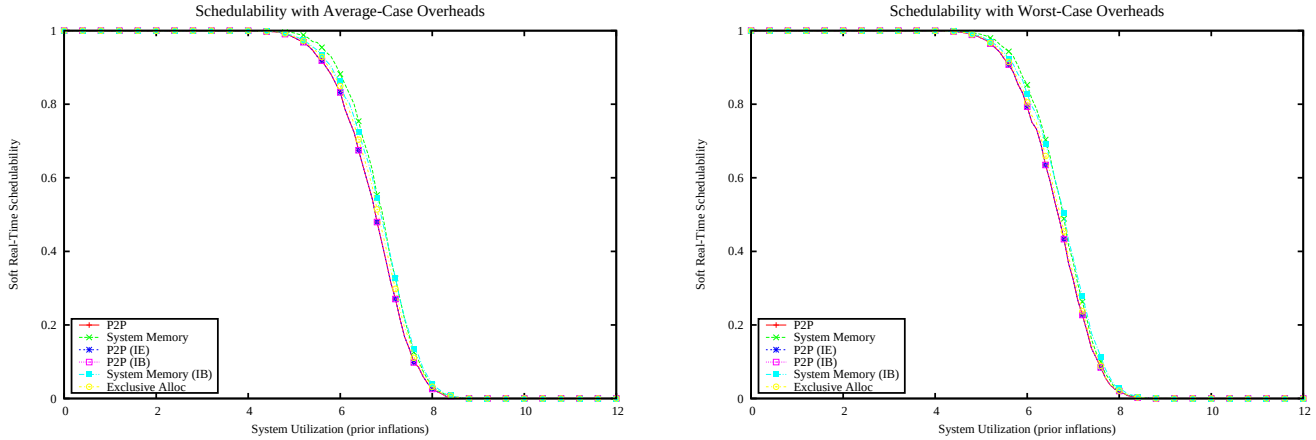

Figure 5968: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

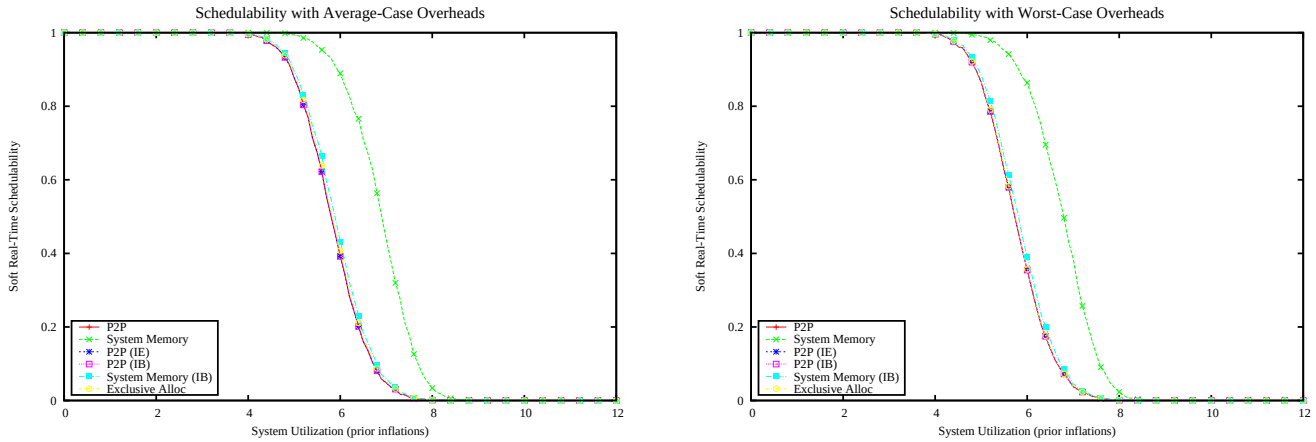

Figure 5969: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

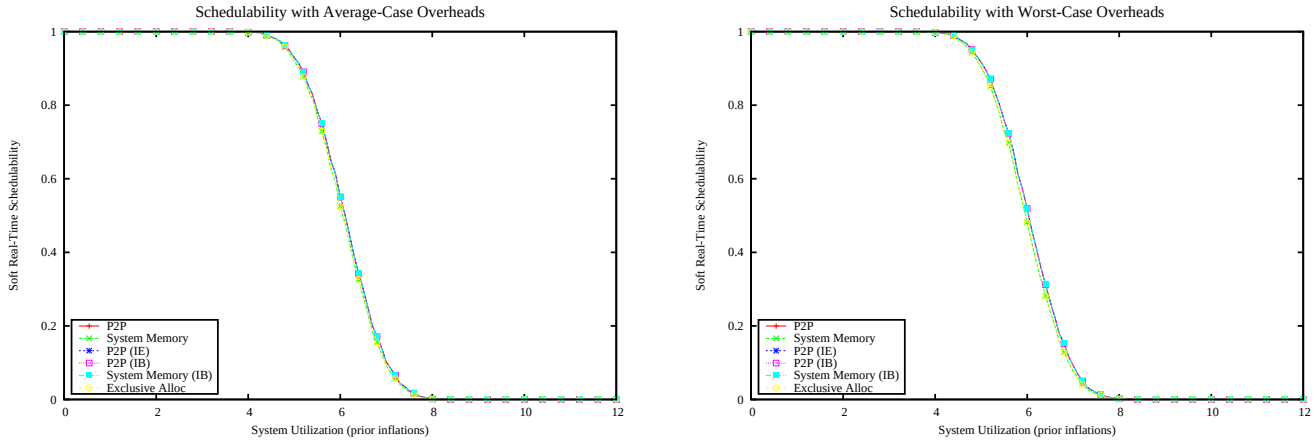

Figure 5970: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

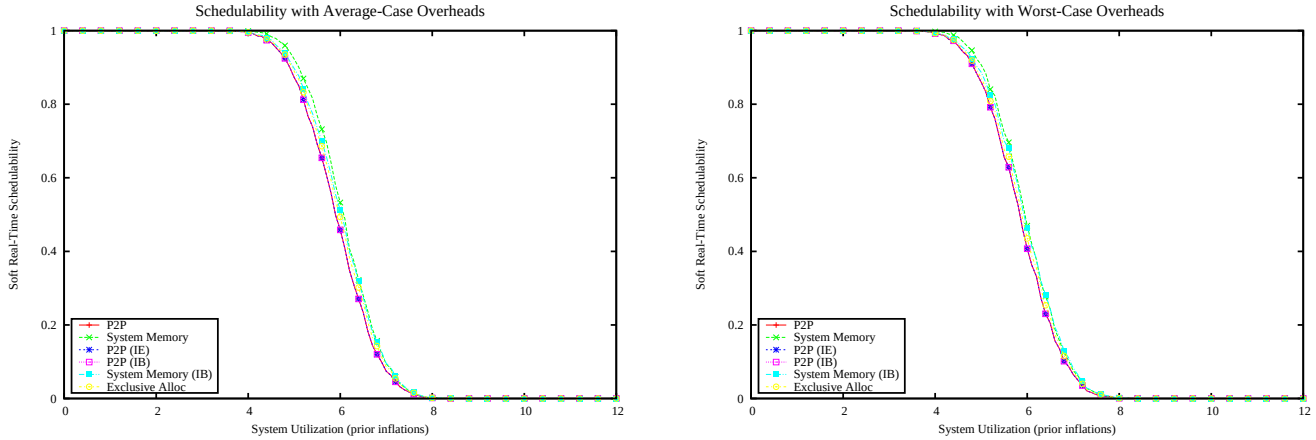

Figure 5971: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

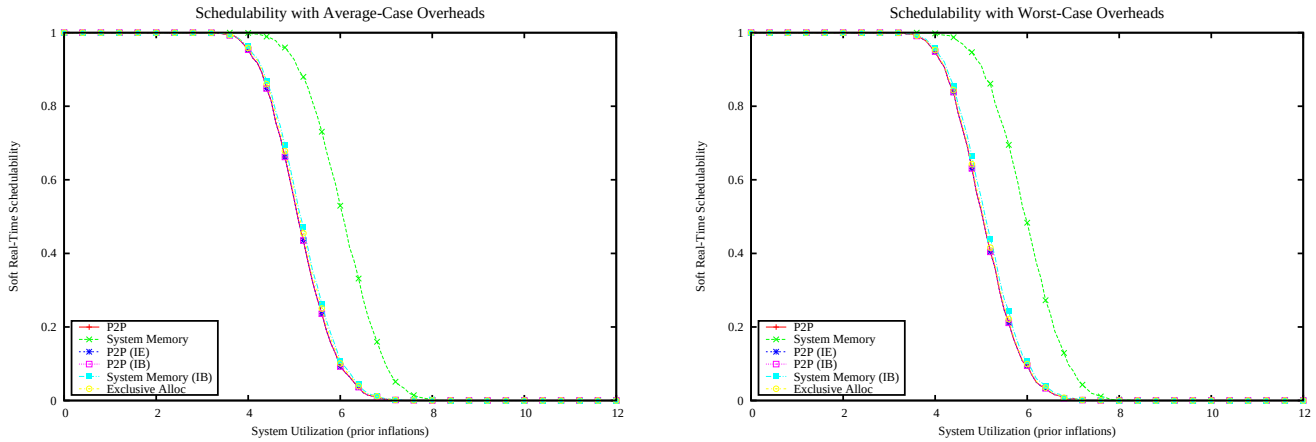

Figure 5972: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

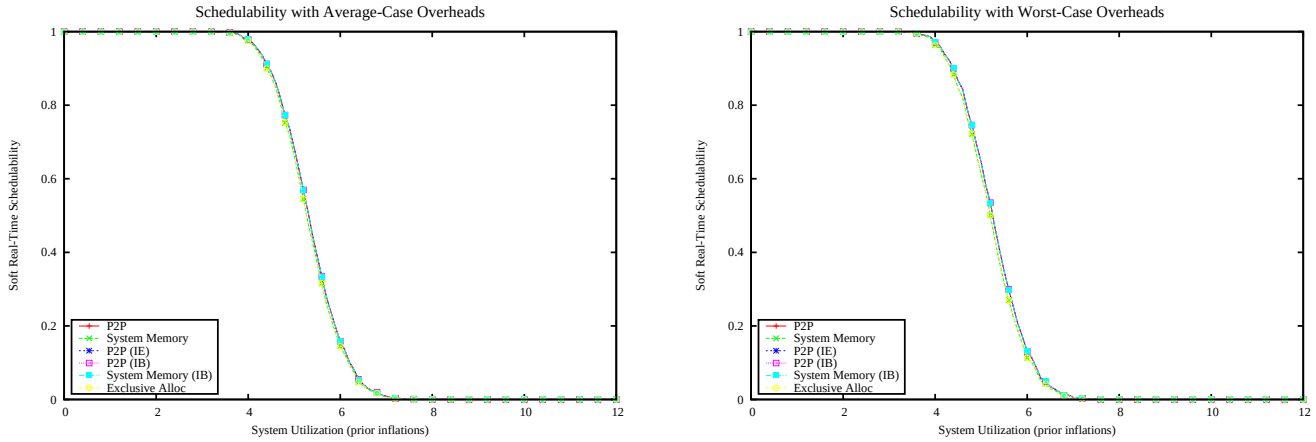

Figure 5973: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

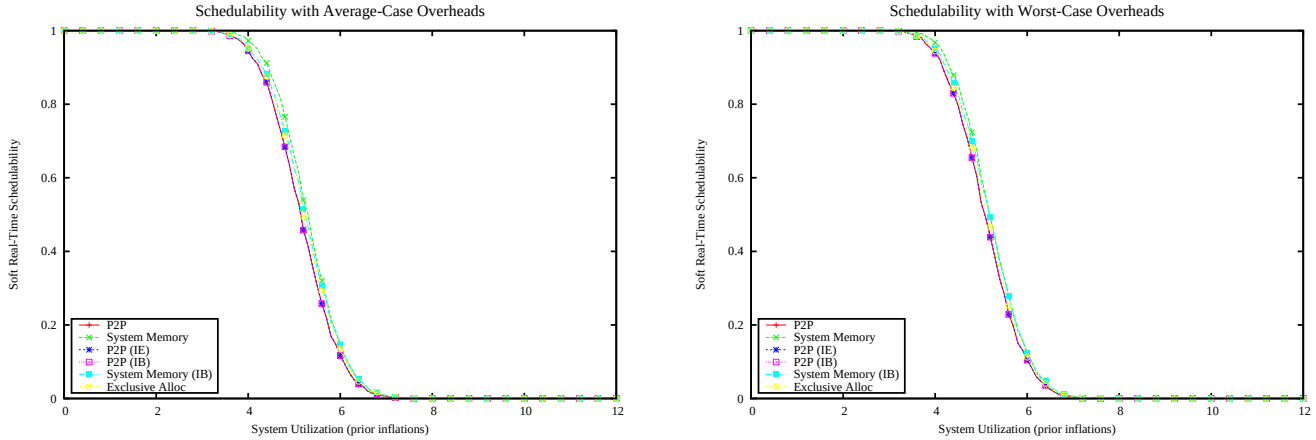

Figure 5974: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

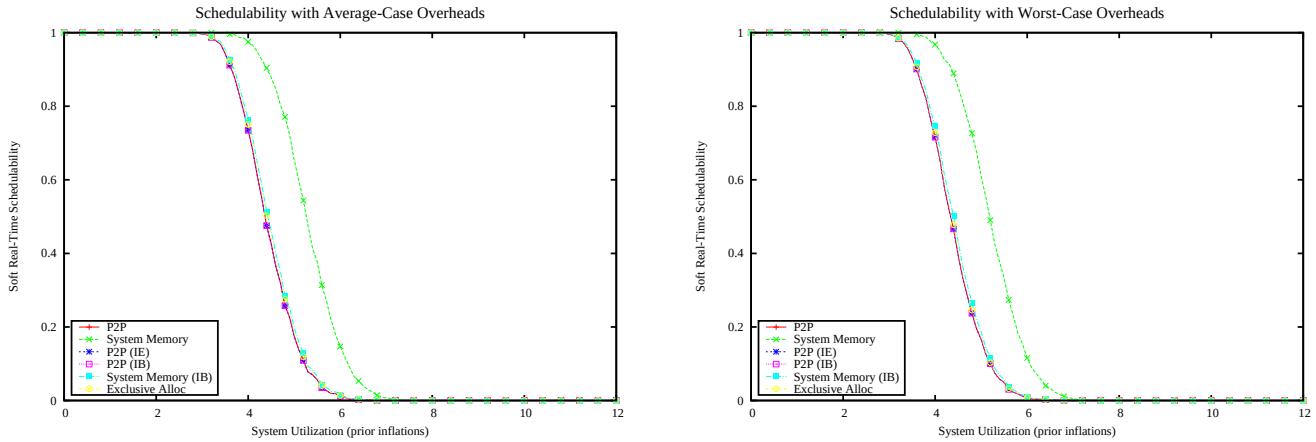

Figure 5975: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

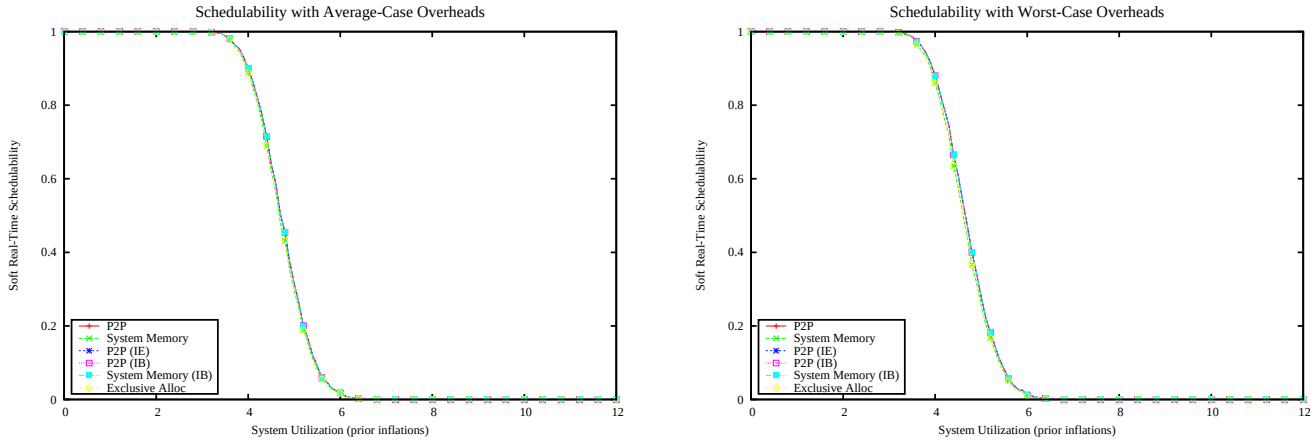

Figure 5976: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

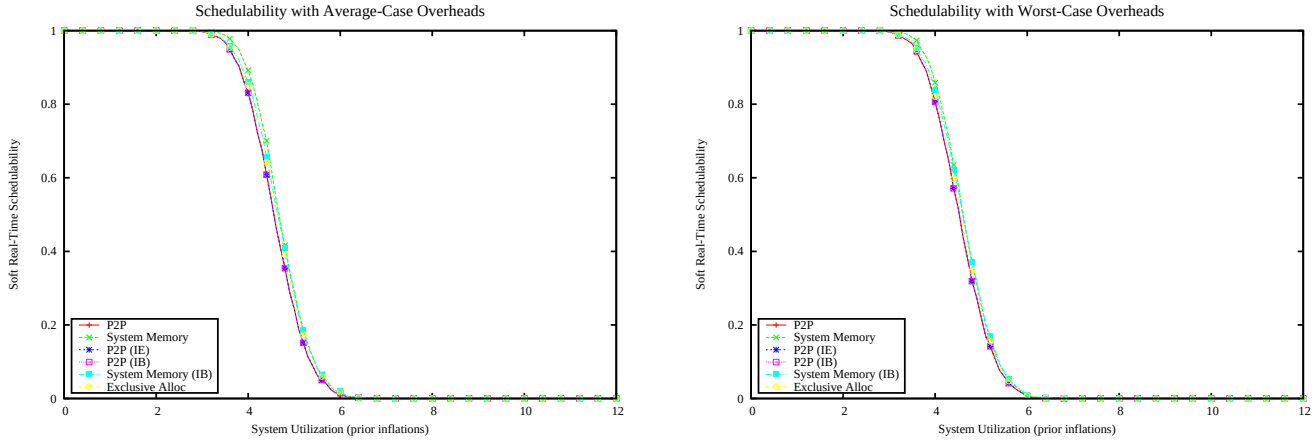

Figure 5977: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

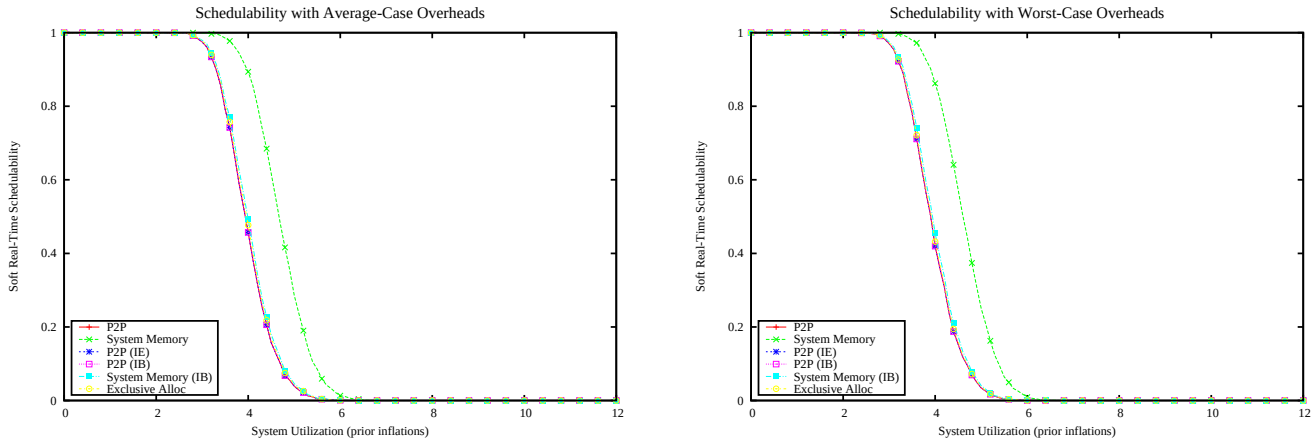

Figure 5978: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

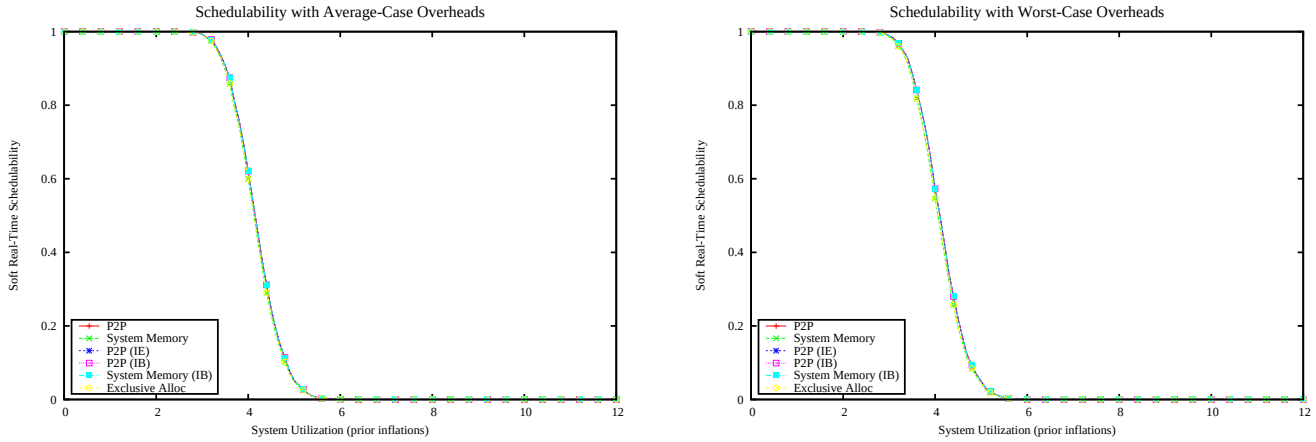

Figure 5979: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

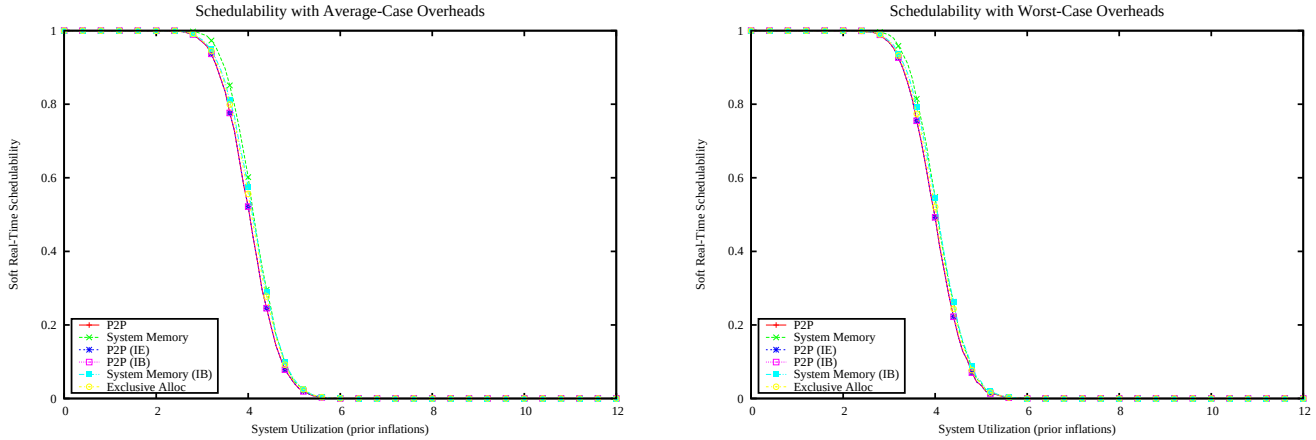

Figure 5980: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

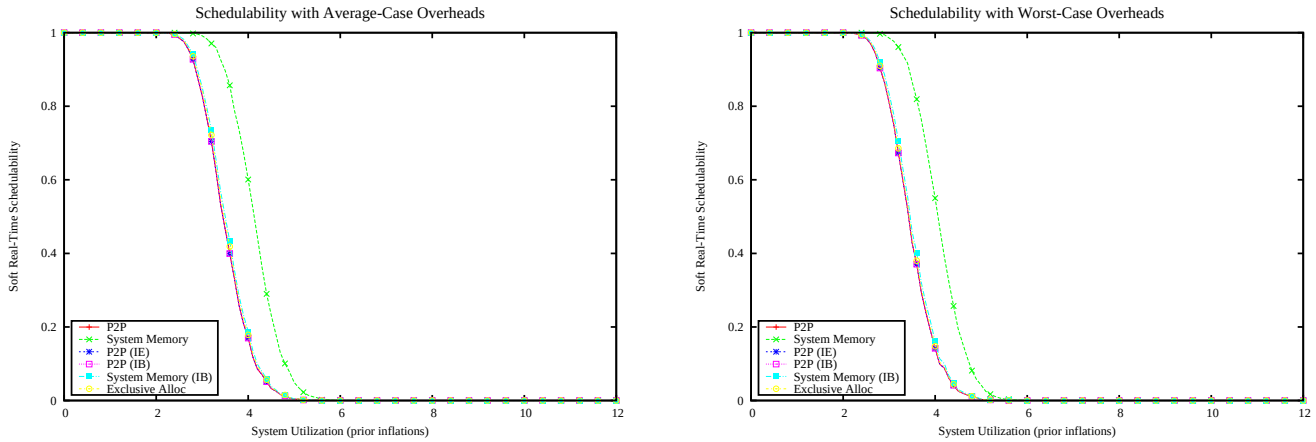

Figure 5981: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

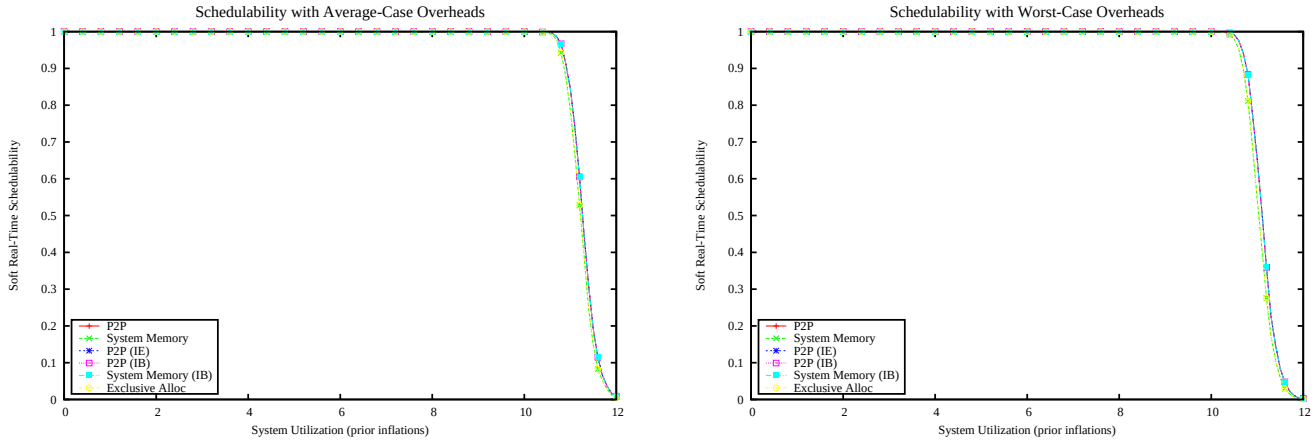

Figure 5982: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

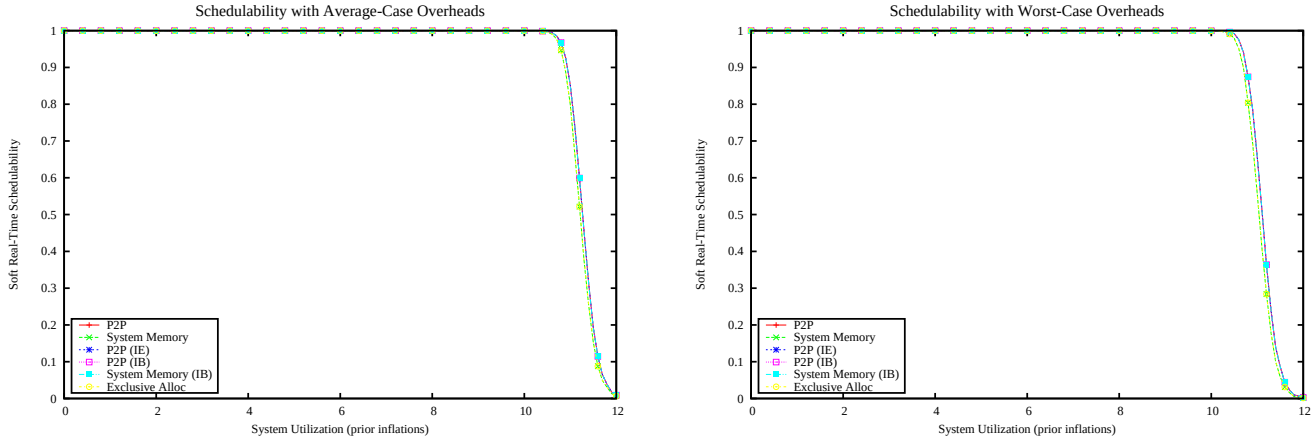

Figure 5983: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

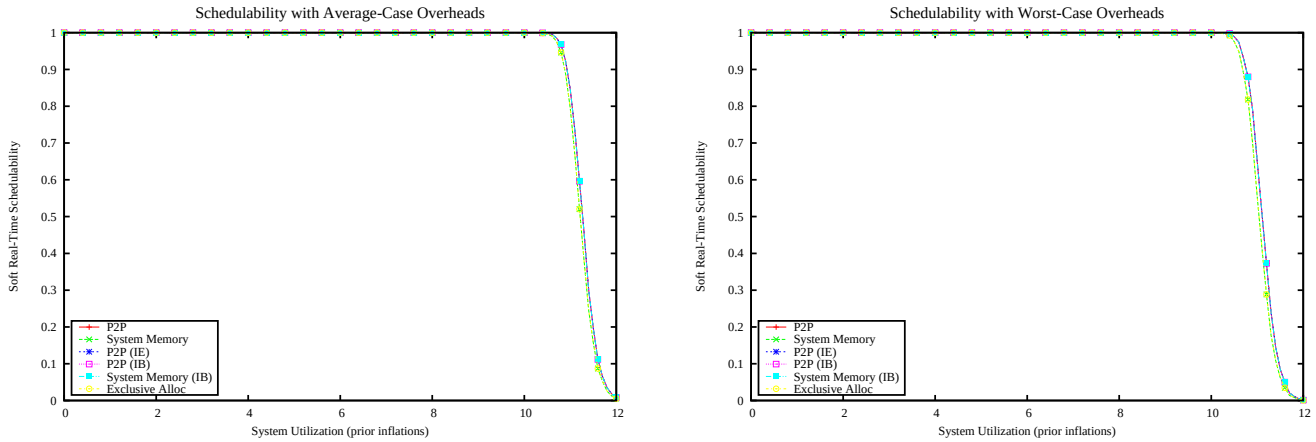

Figure 5984: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

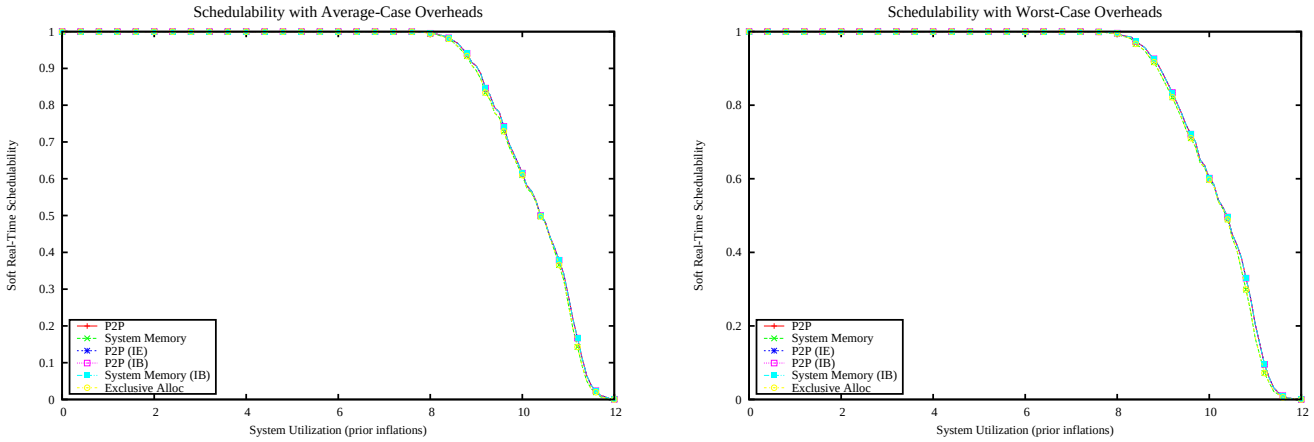

Figure 5985: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

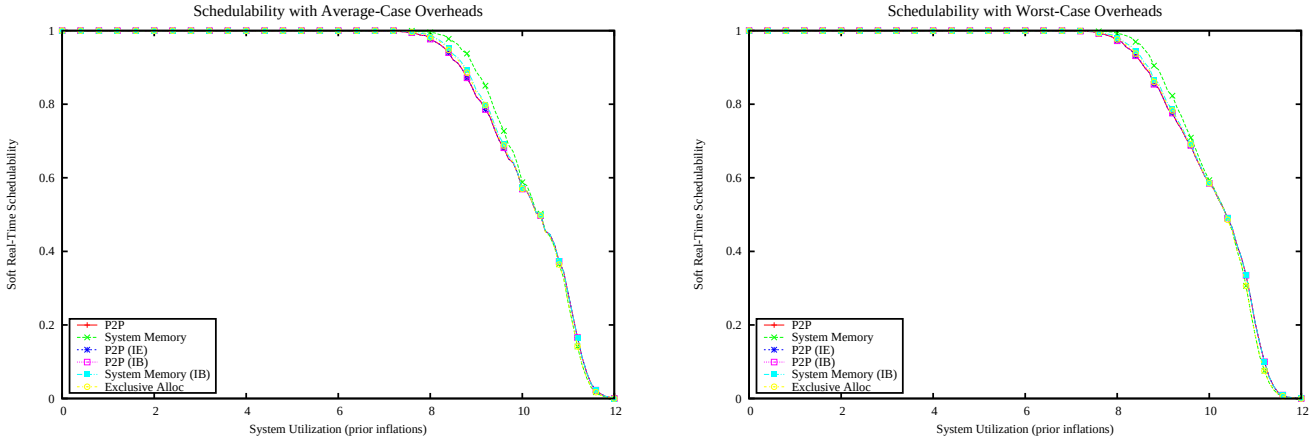

Figure 5986: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

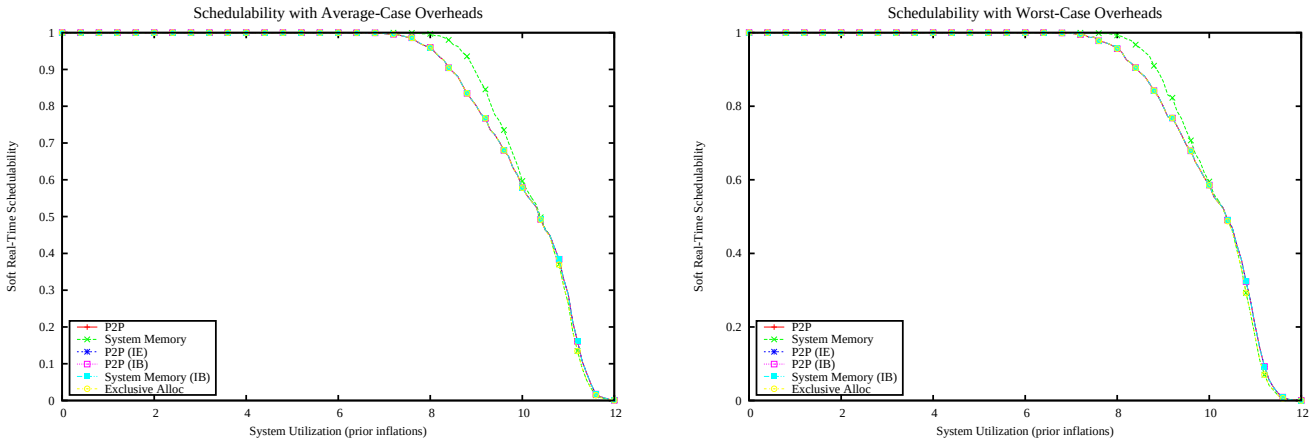

Figure 5987: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

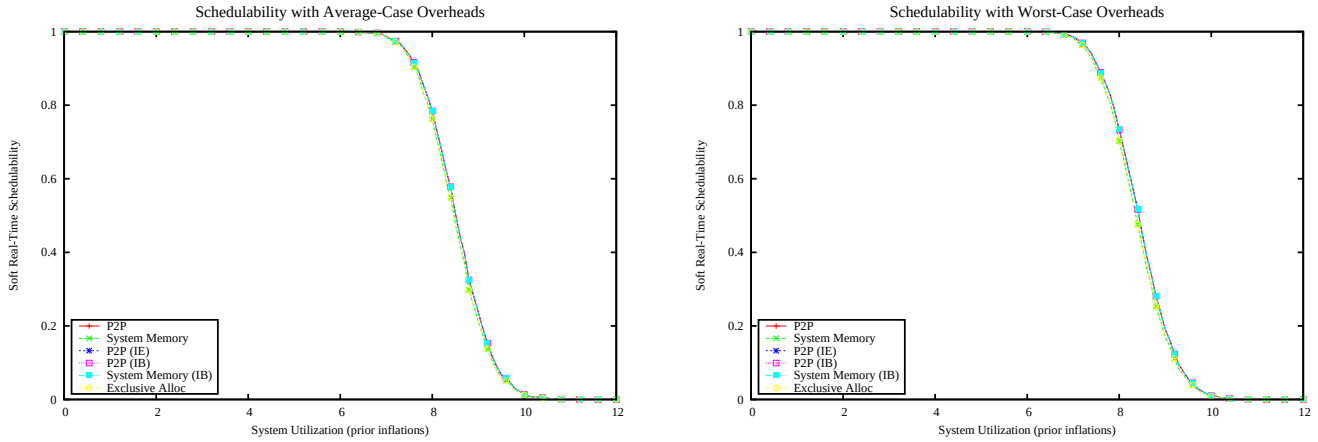

Figure 5988: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

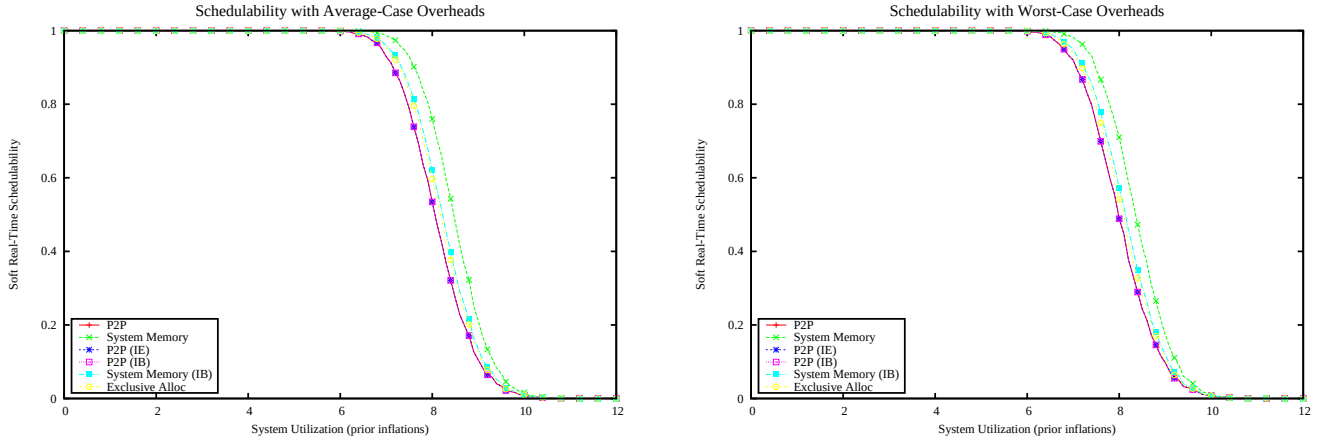

Figure 5989: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

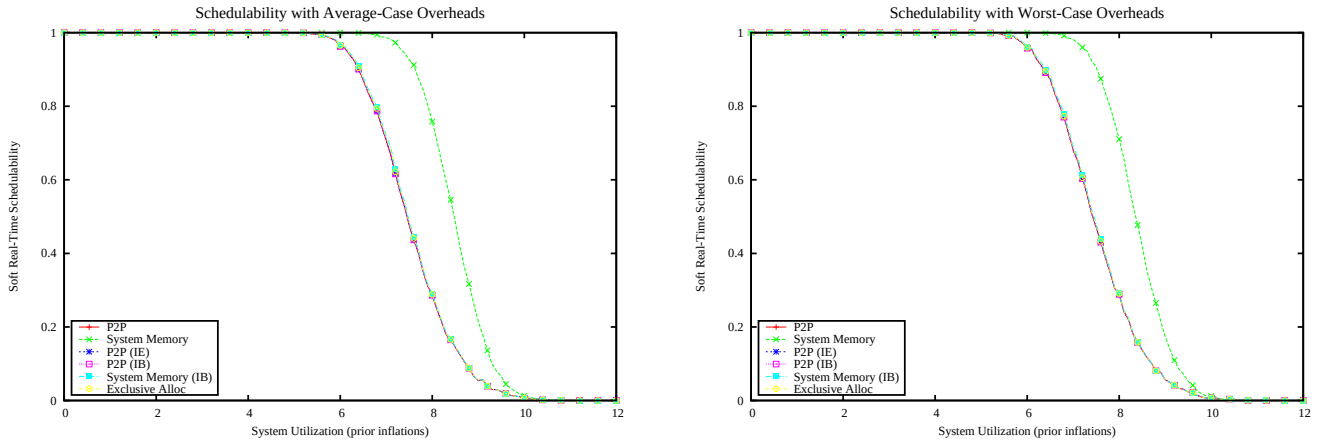

Figure 5990: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

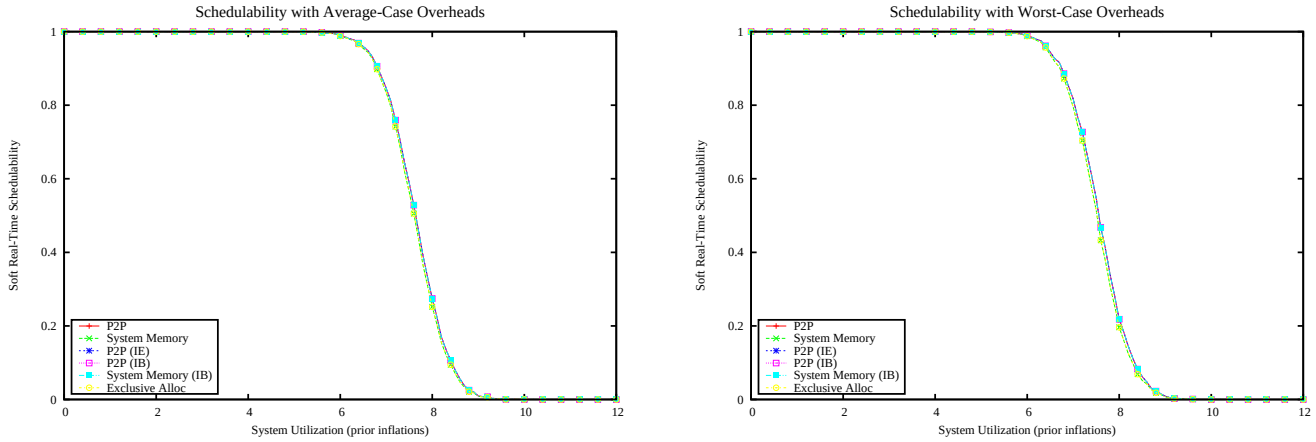

Figure 5991: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

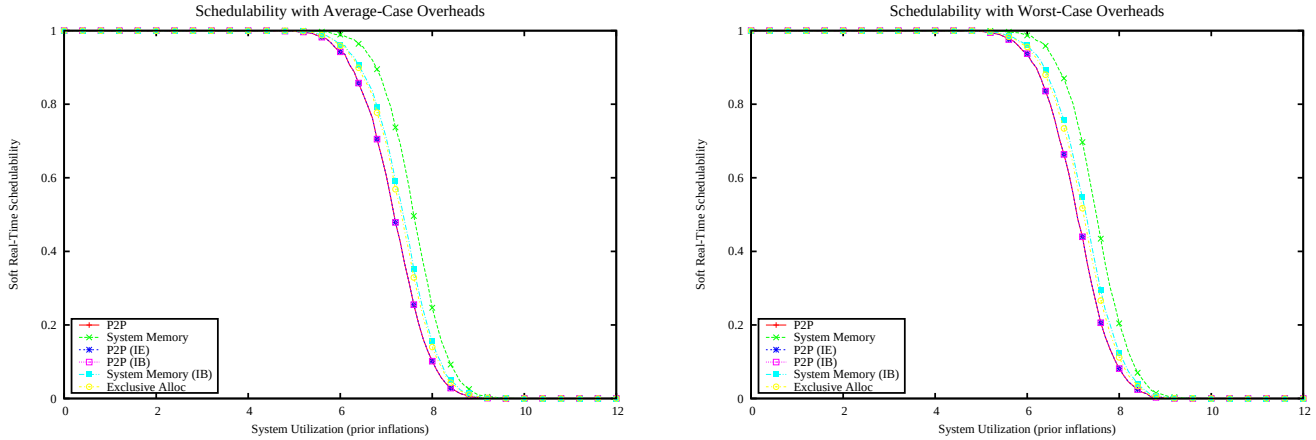

Figure 5992: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

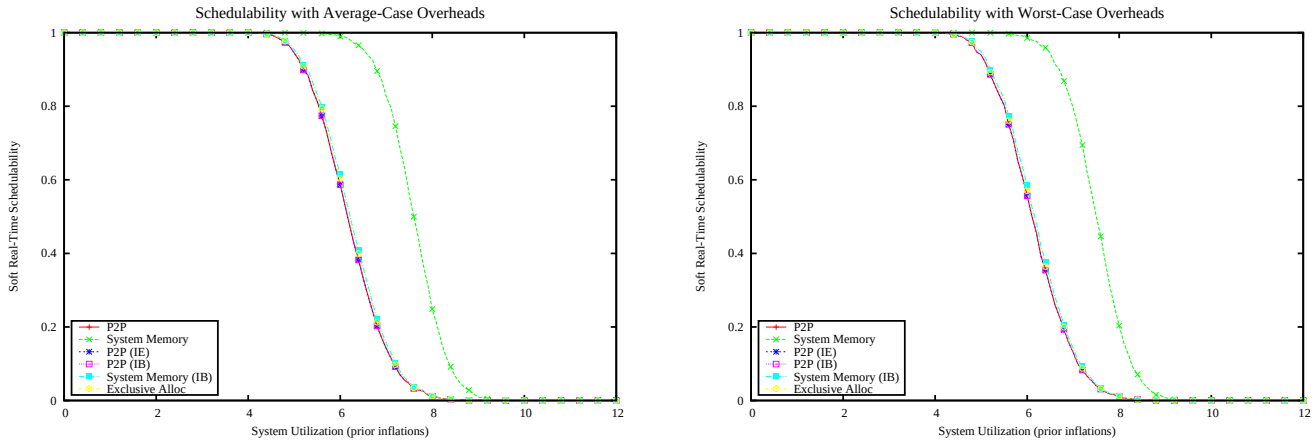

Figure 5993: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

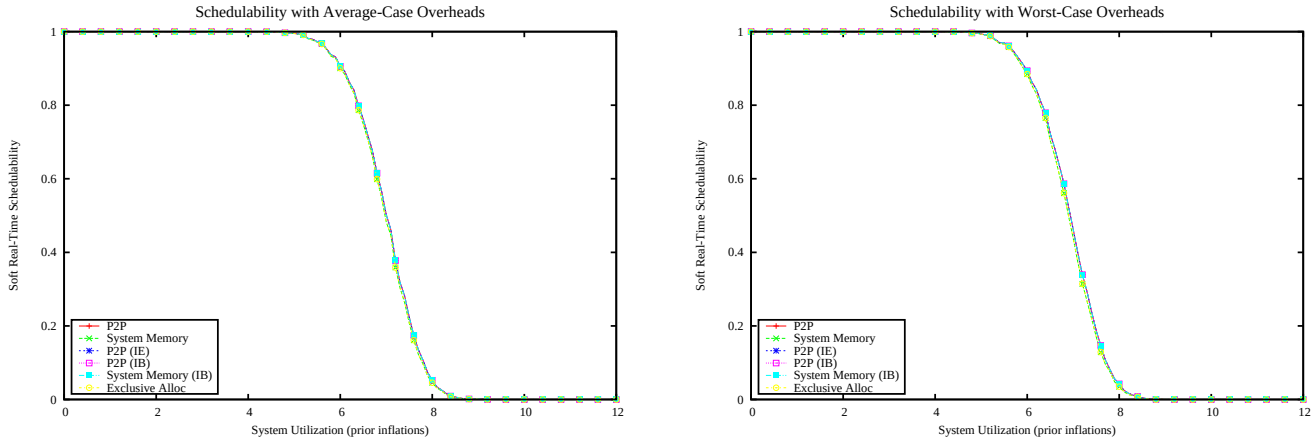

Figure 5994: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

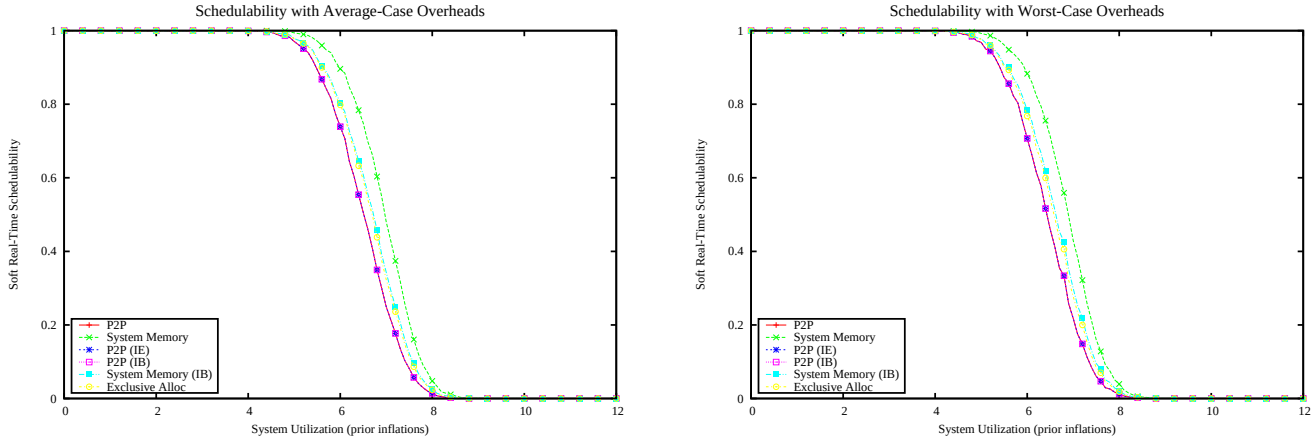

Figure 5995: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

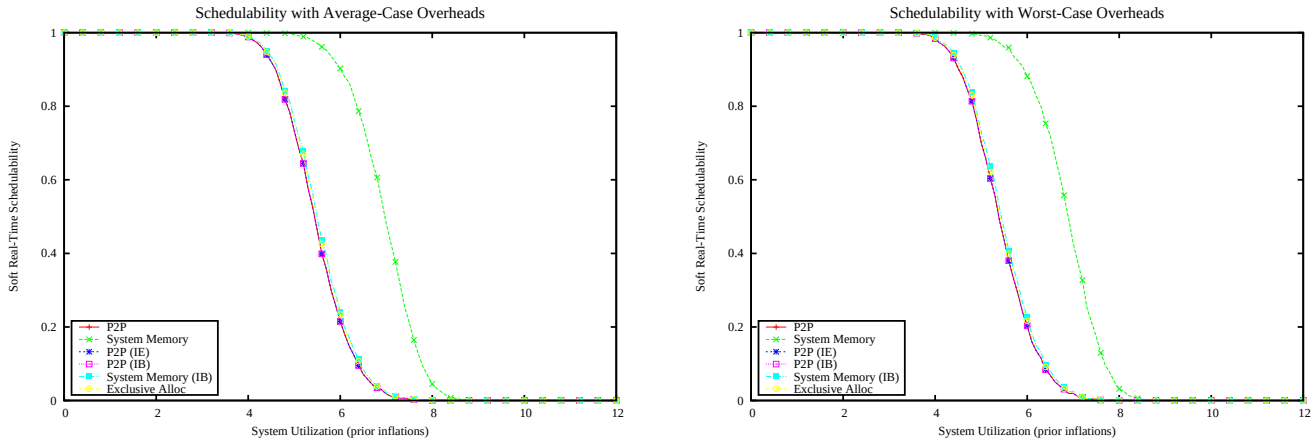

Figure 5996: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

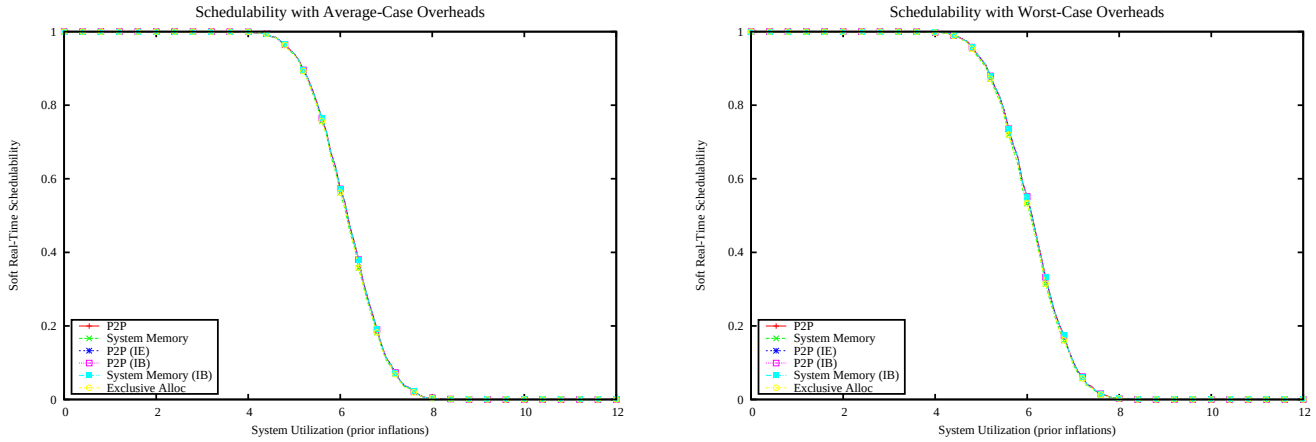

Figure 5997: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

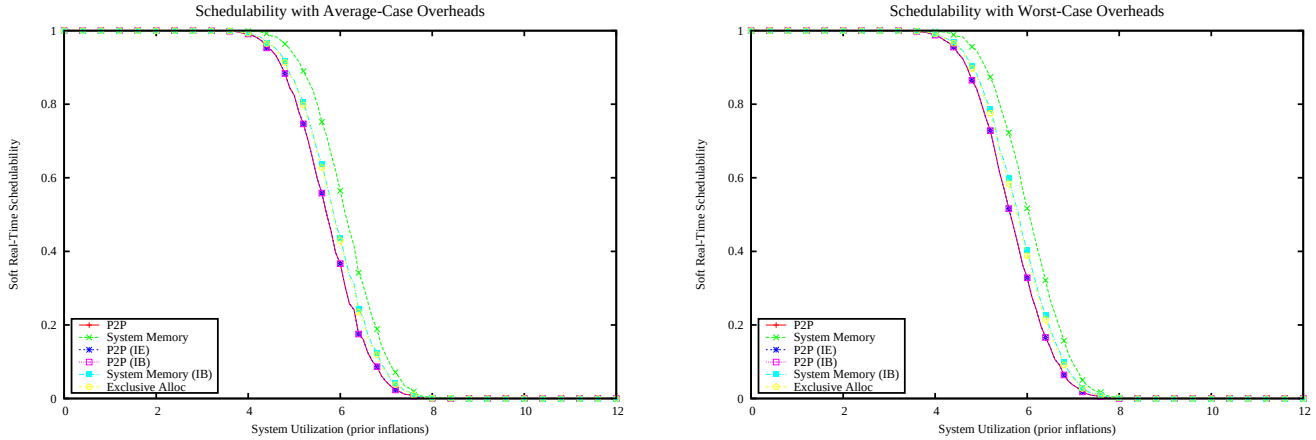

Figure 5998: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

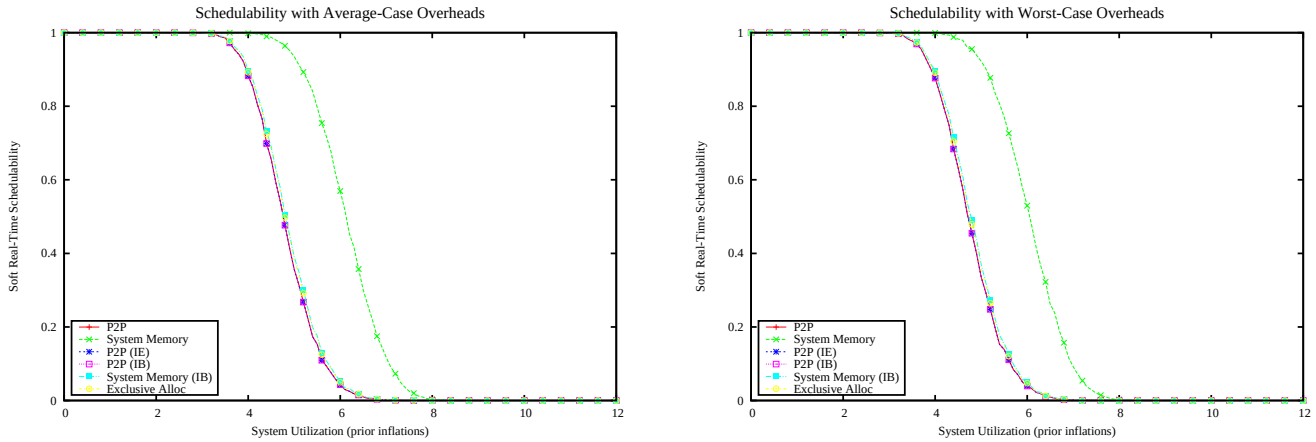

Figure 5999: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

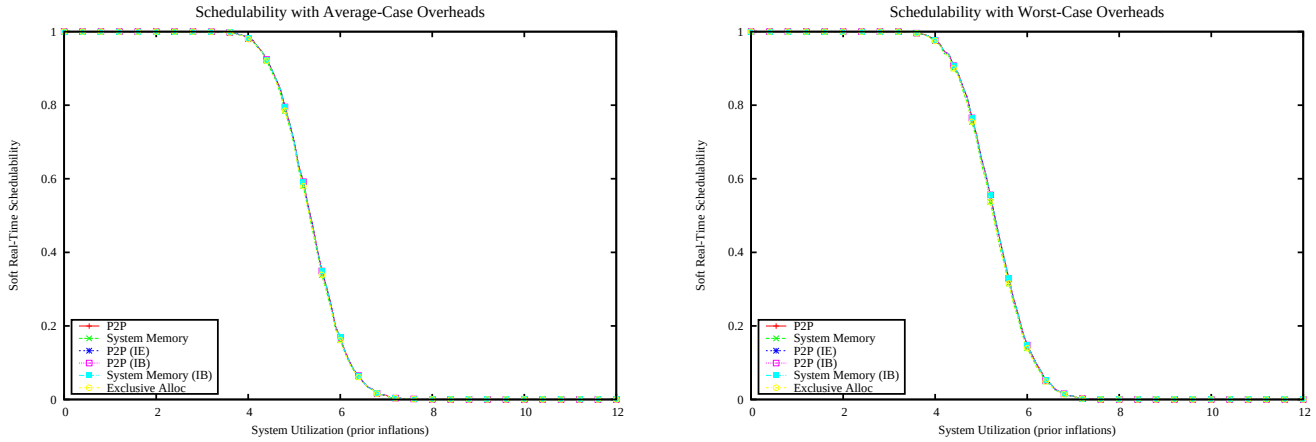

Figure 6000: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

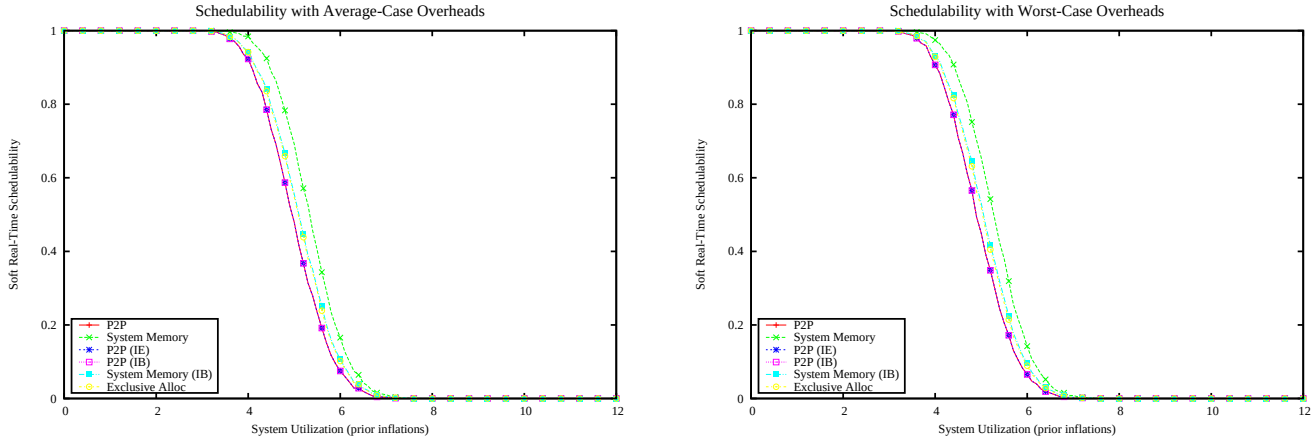

Figure 6001: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

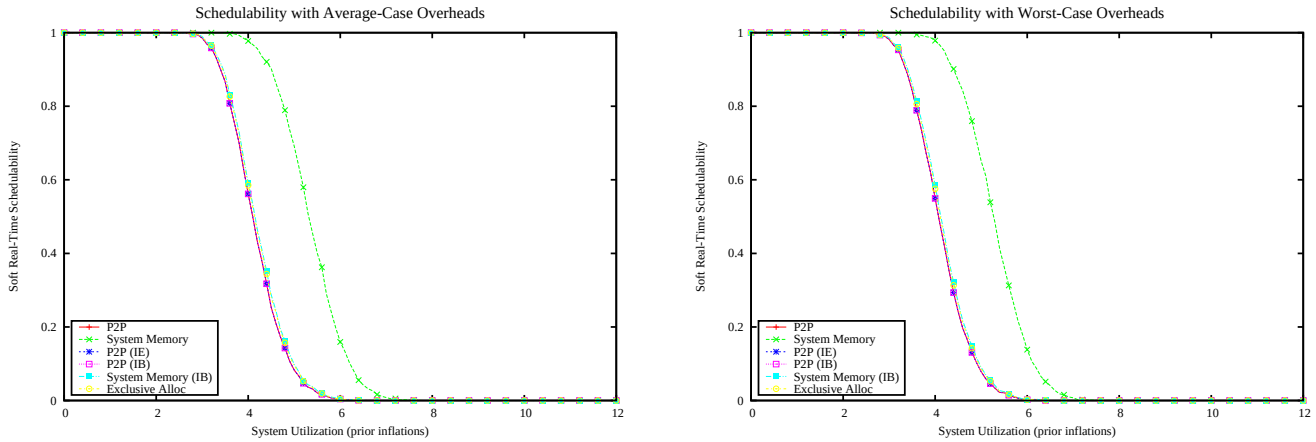

Figure 6002: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

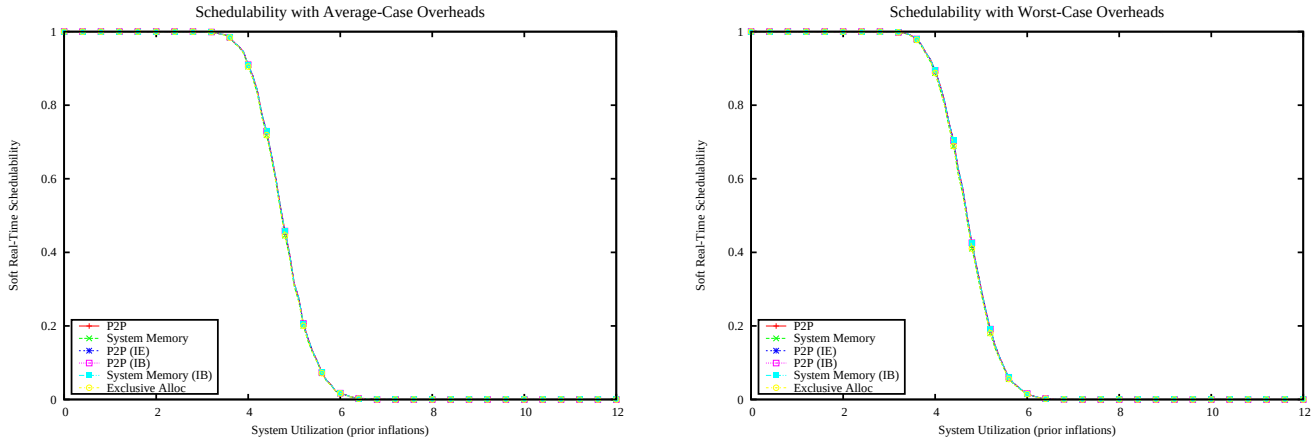

Figure 6003: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

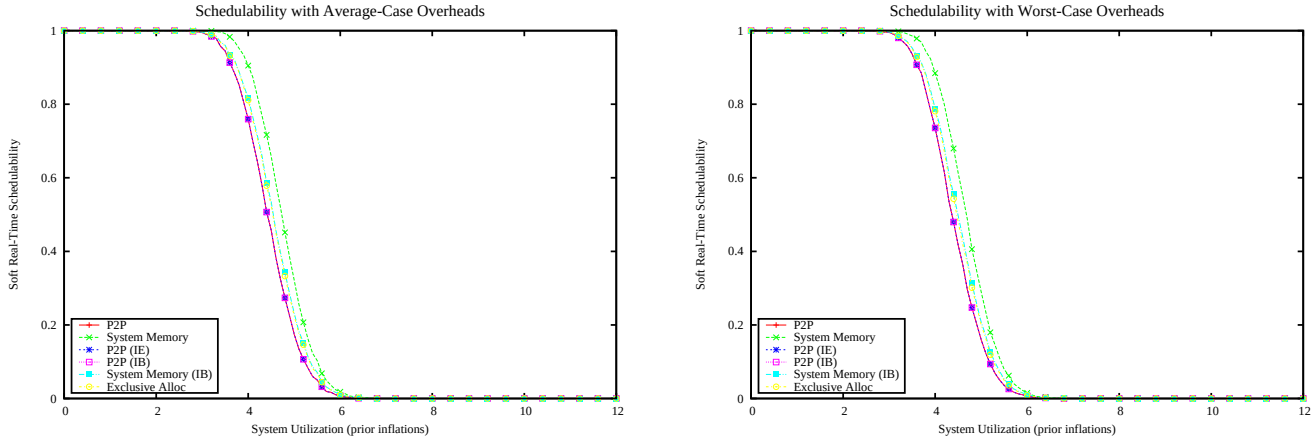

Figure 6004: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

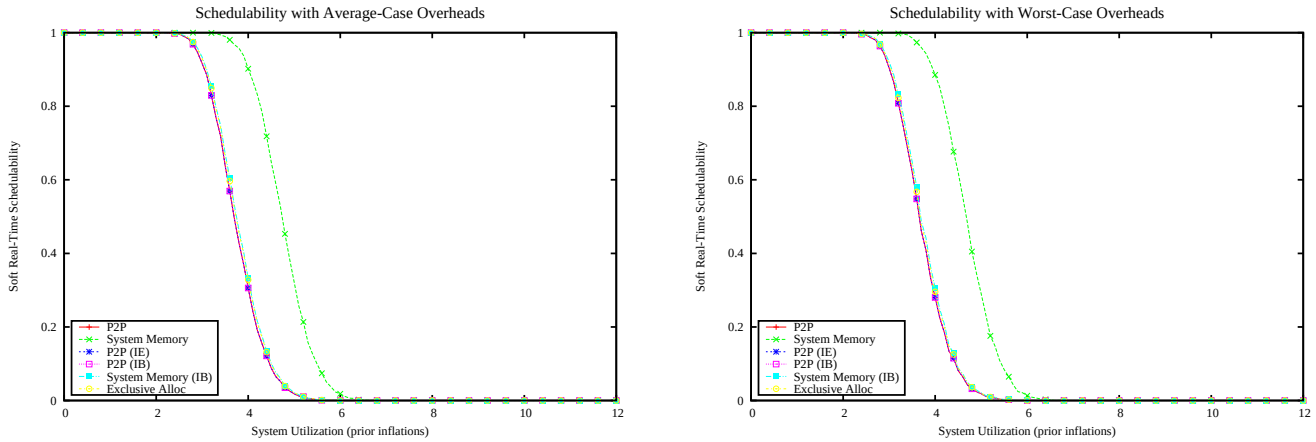

Figure 6005: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

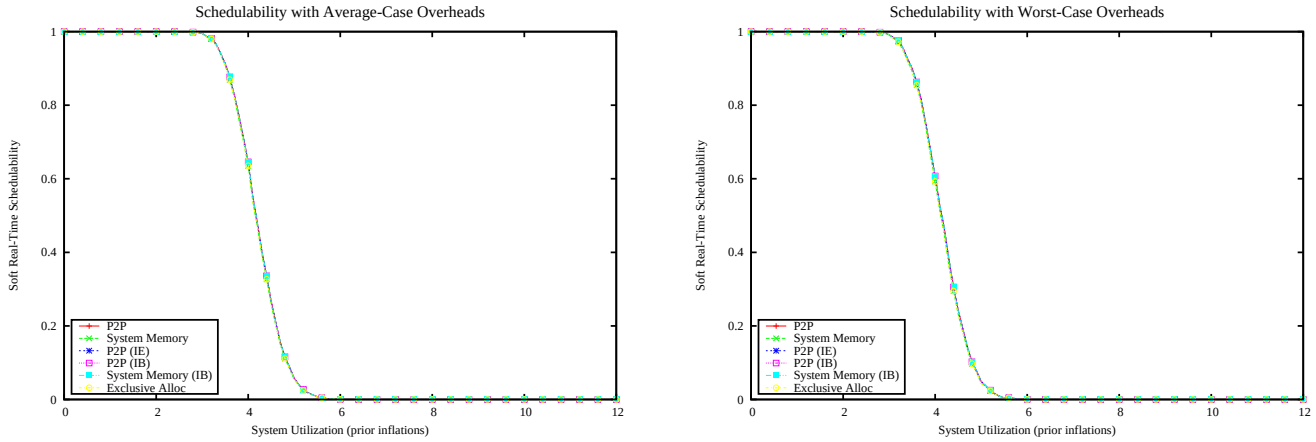

Figure 6006: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

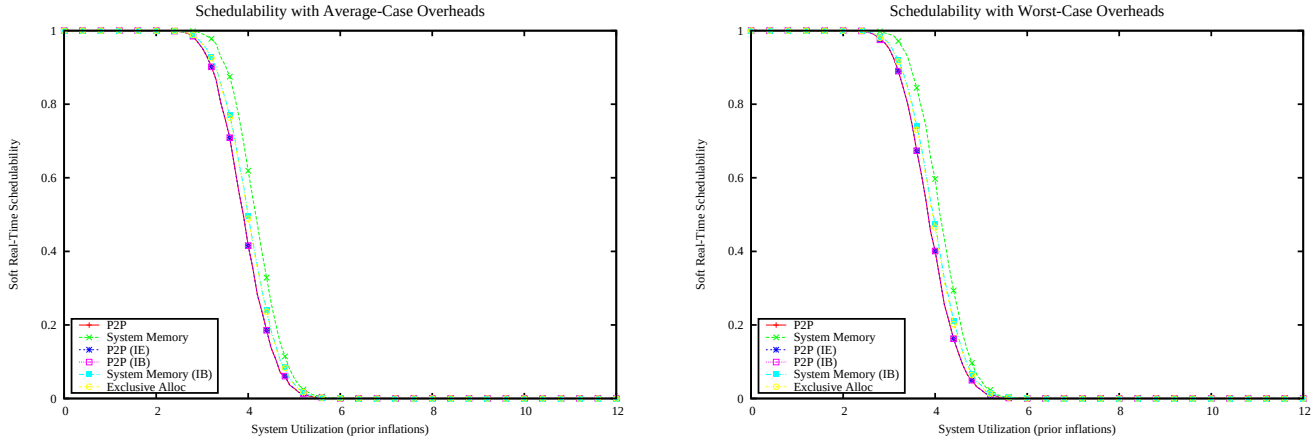

Figure 6007: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

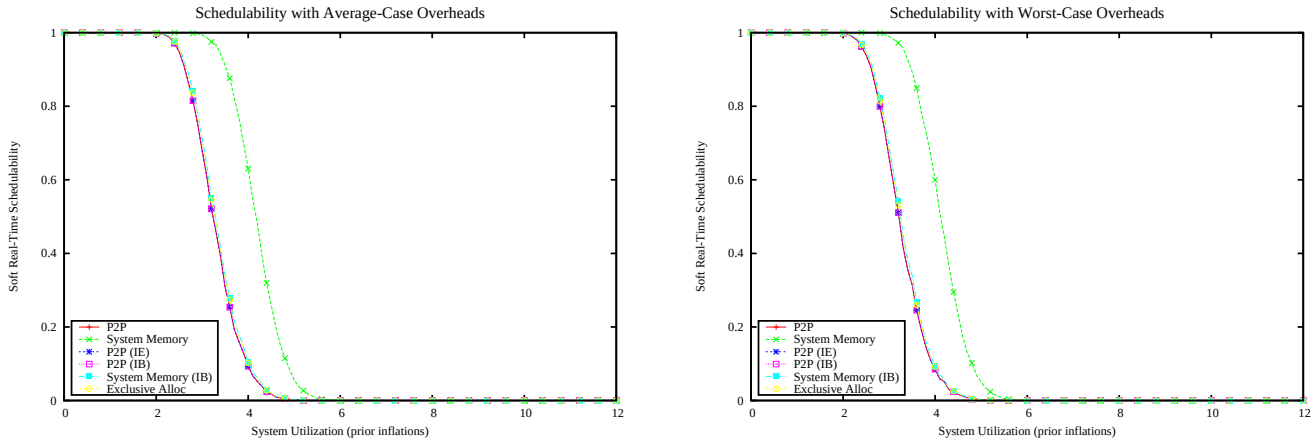

Figure 6008: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

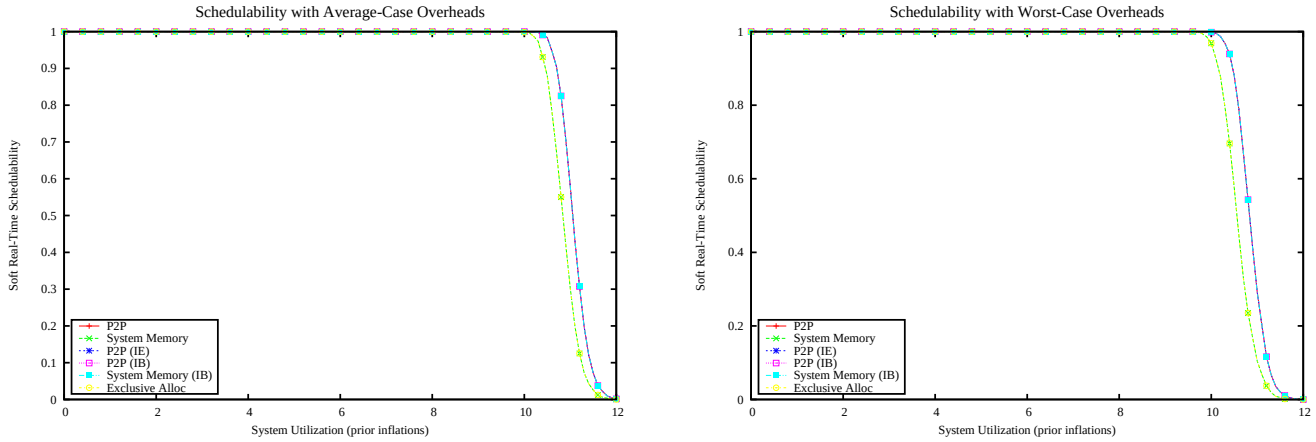

Figure 6009: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

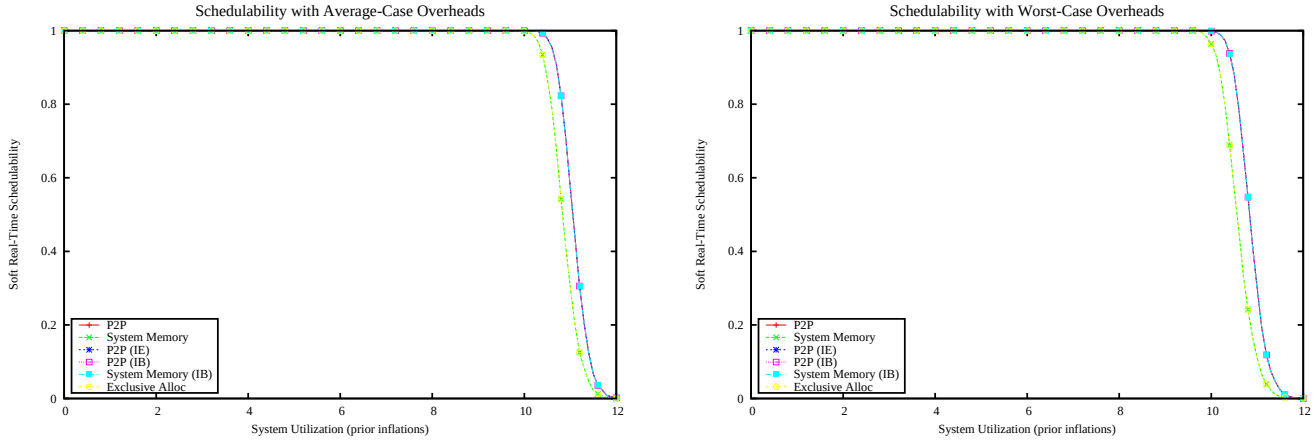

Figure 6010: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

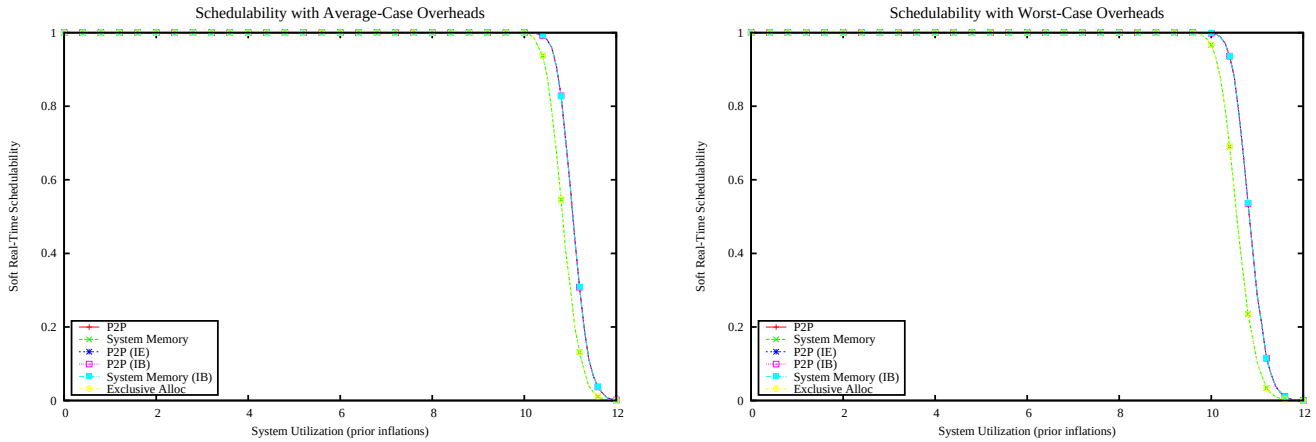

Figure 6011: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

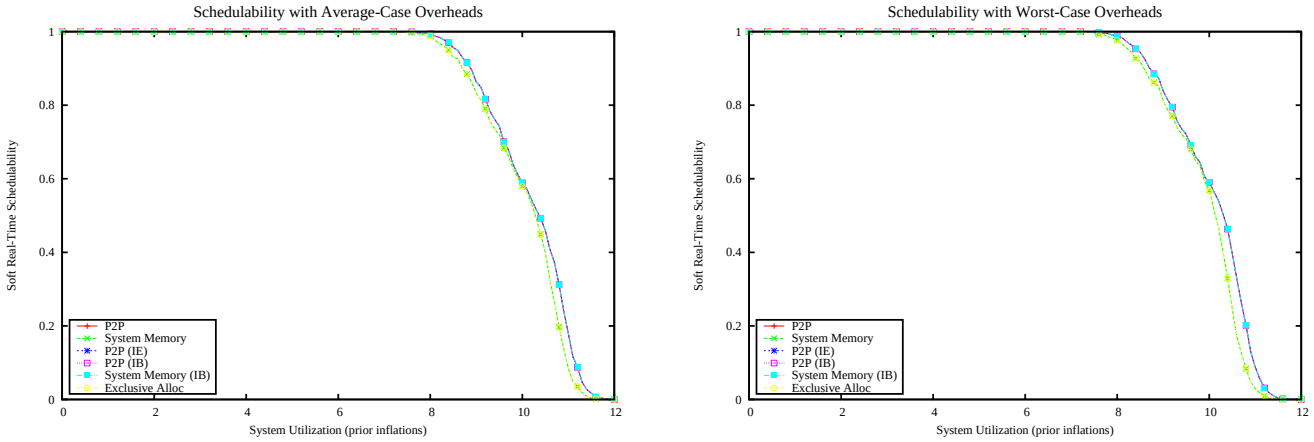

Figure 6012: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

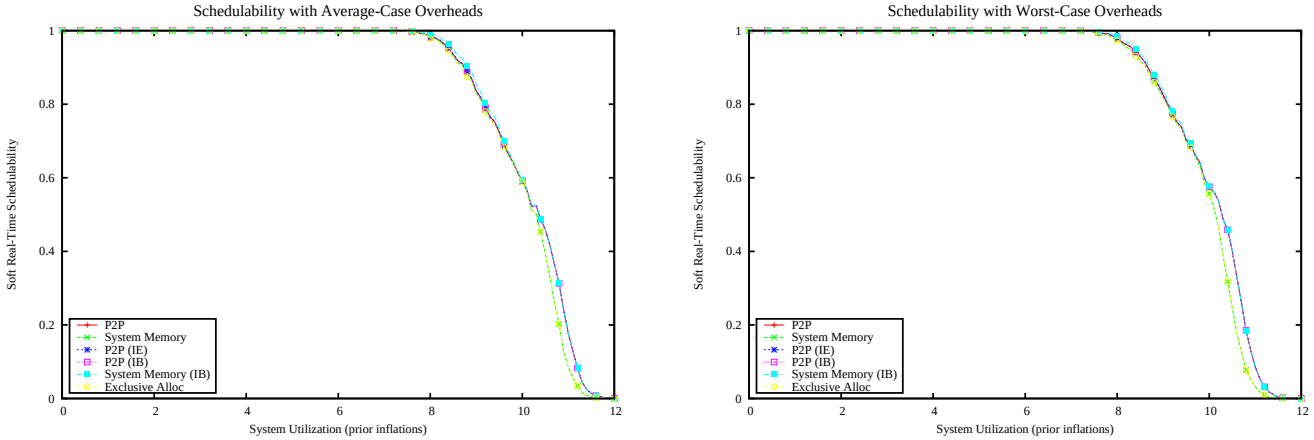

Figure 6013: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

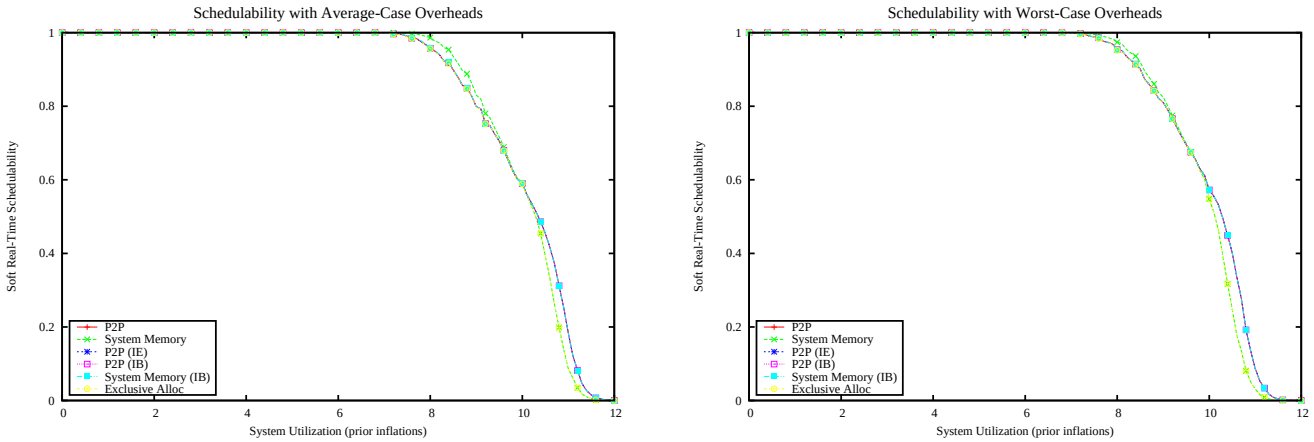

Figure 6014: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

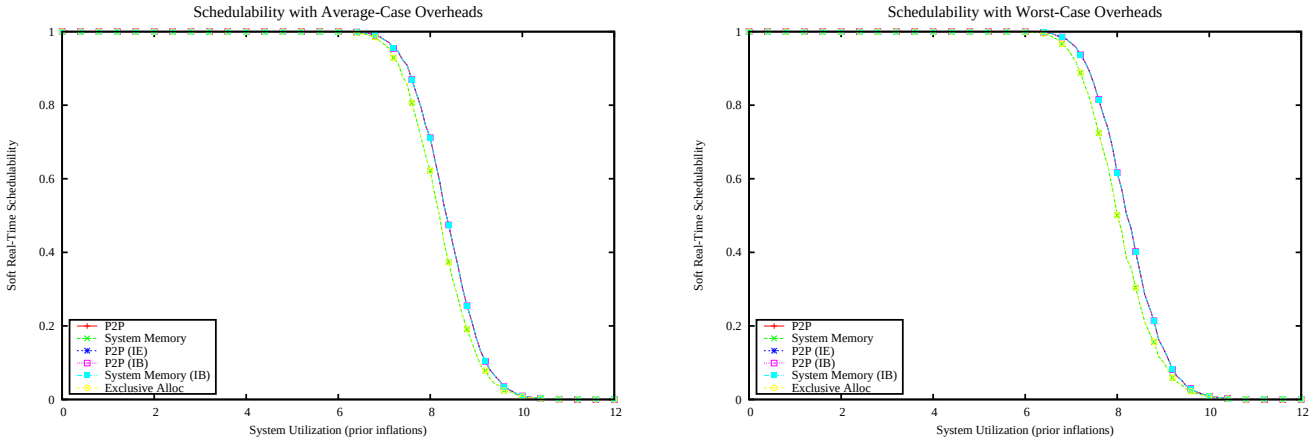

Figure 6015: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

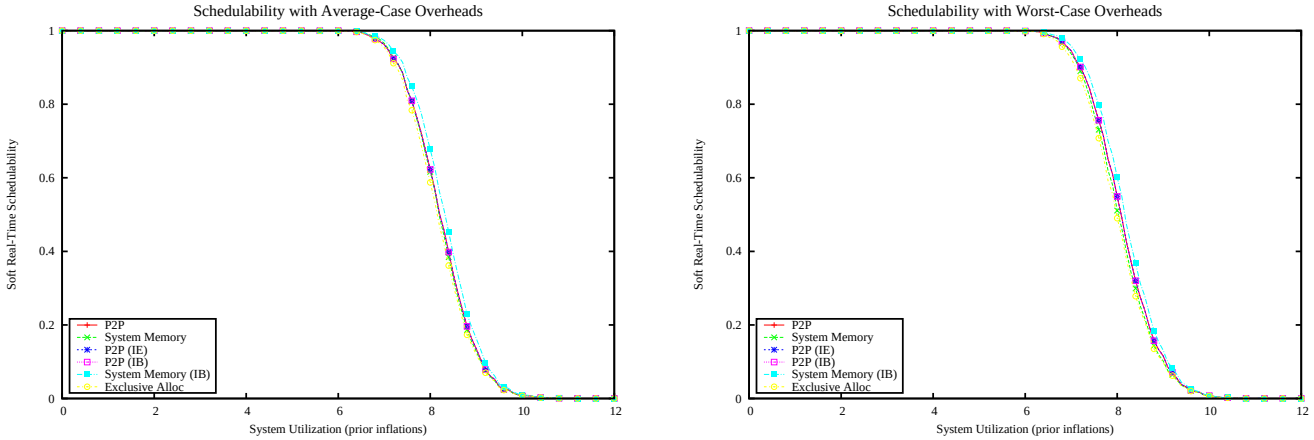

Figure 6016: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

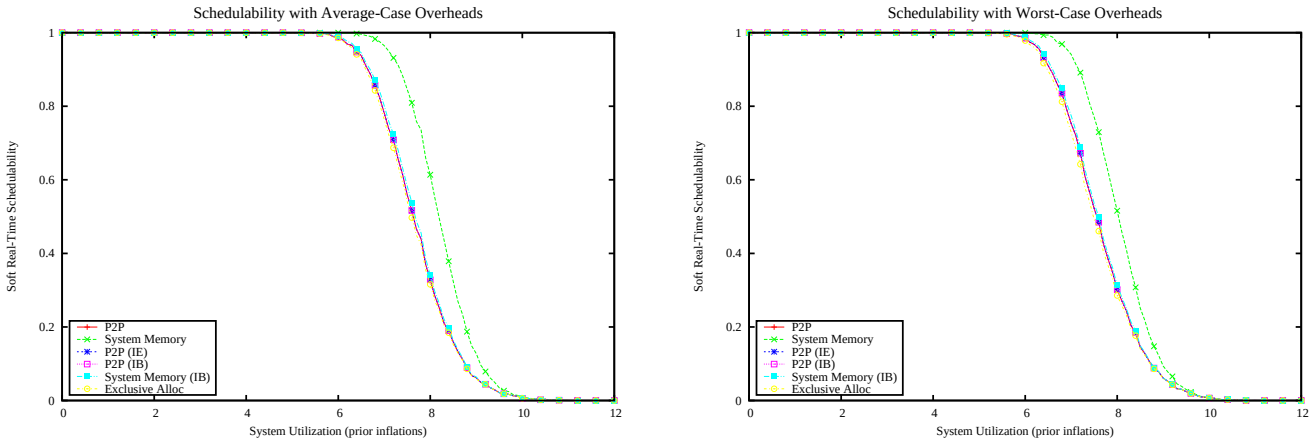

Figure 6017: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

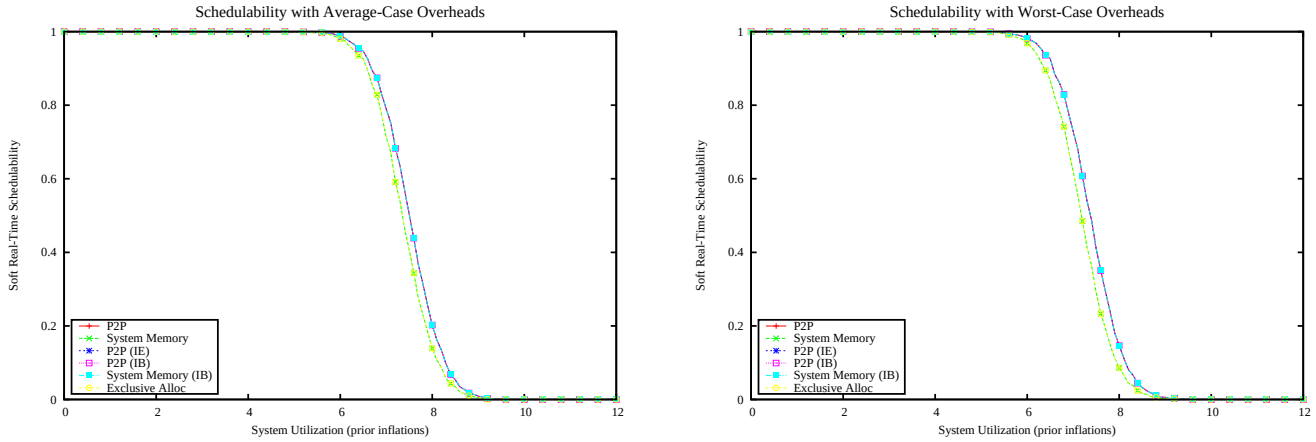

Figure 6018: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

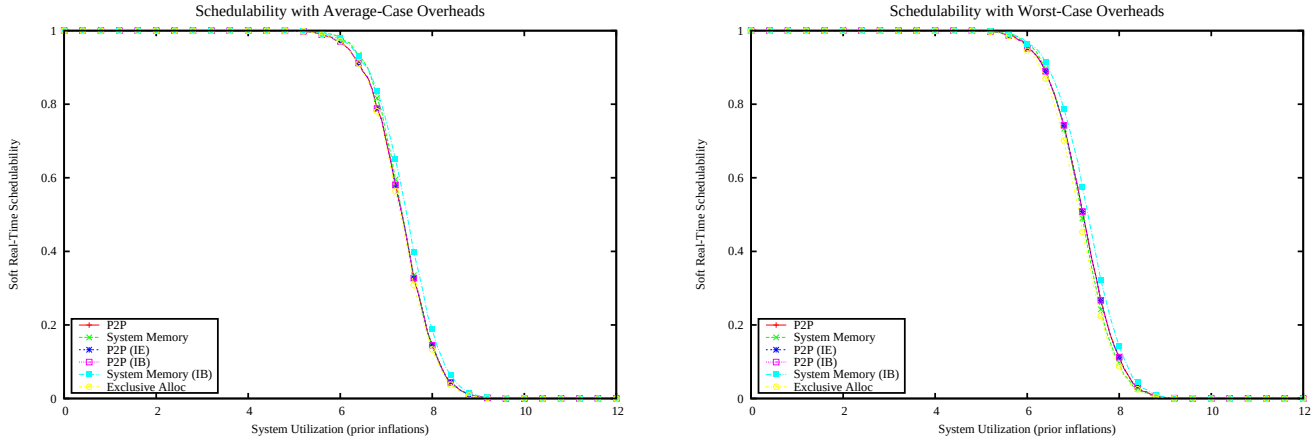

Figure 6019: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

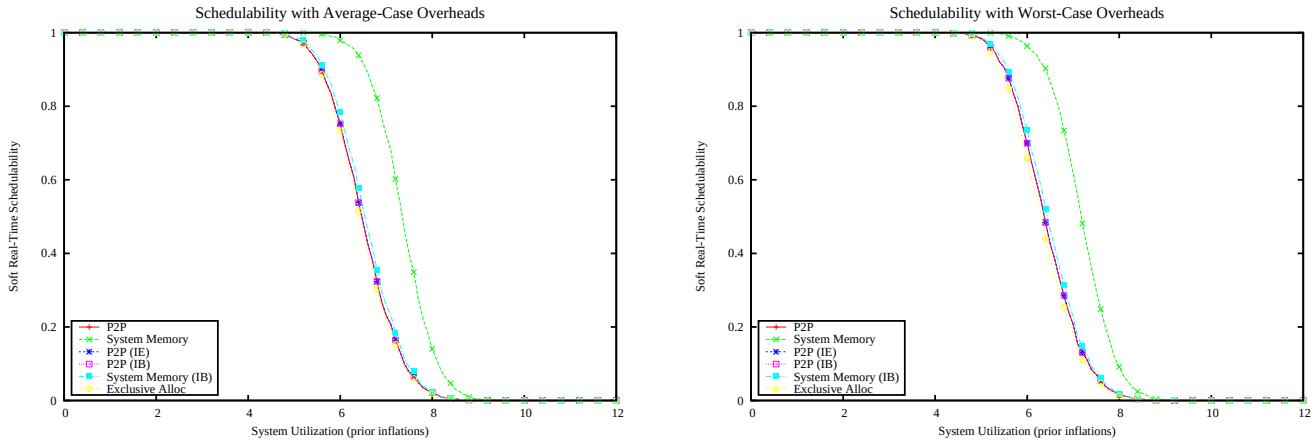

Figure 6020: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

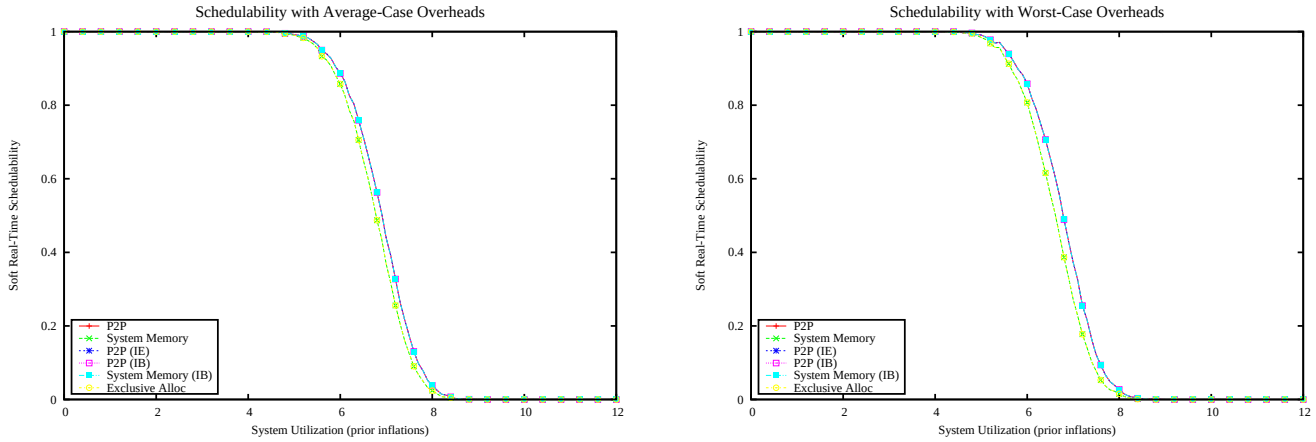

Figure 6021: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

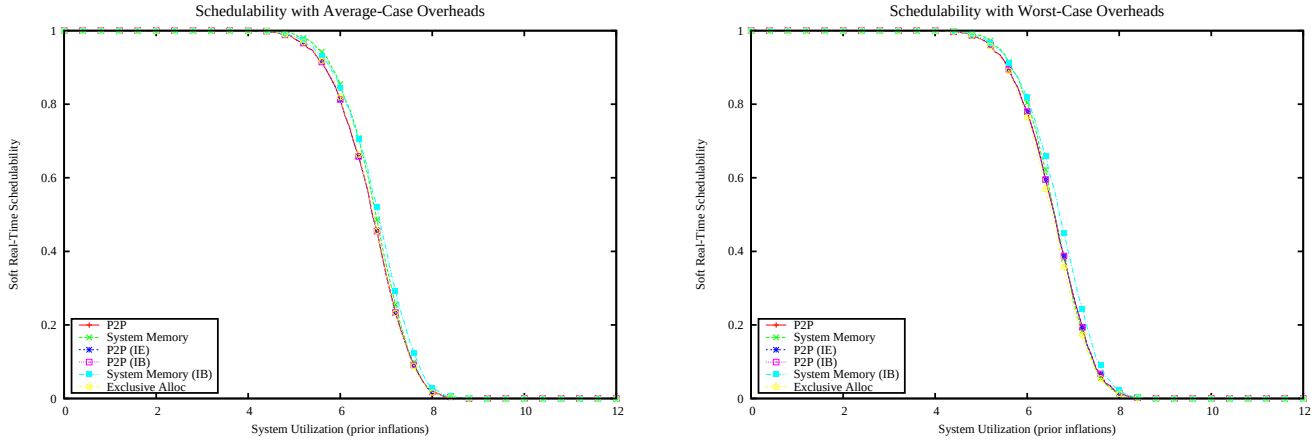

Figure 6022: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

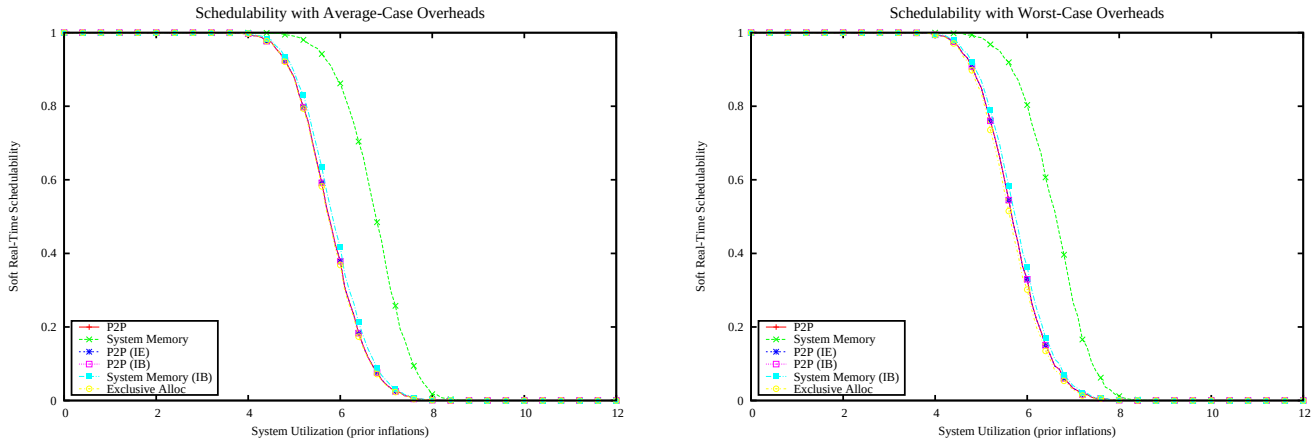

Figure 6023: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

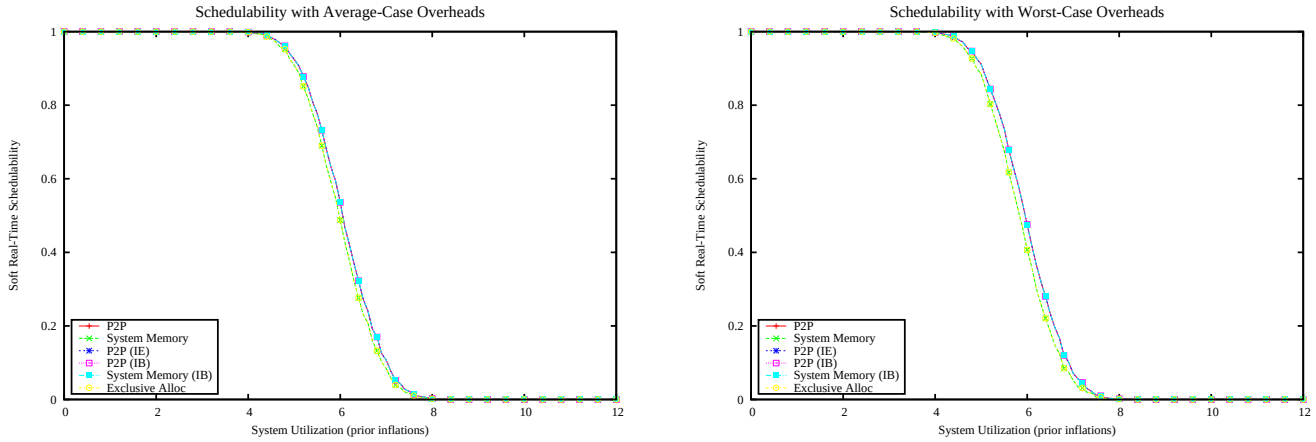

Figure 6024: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

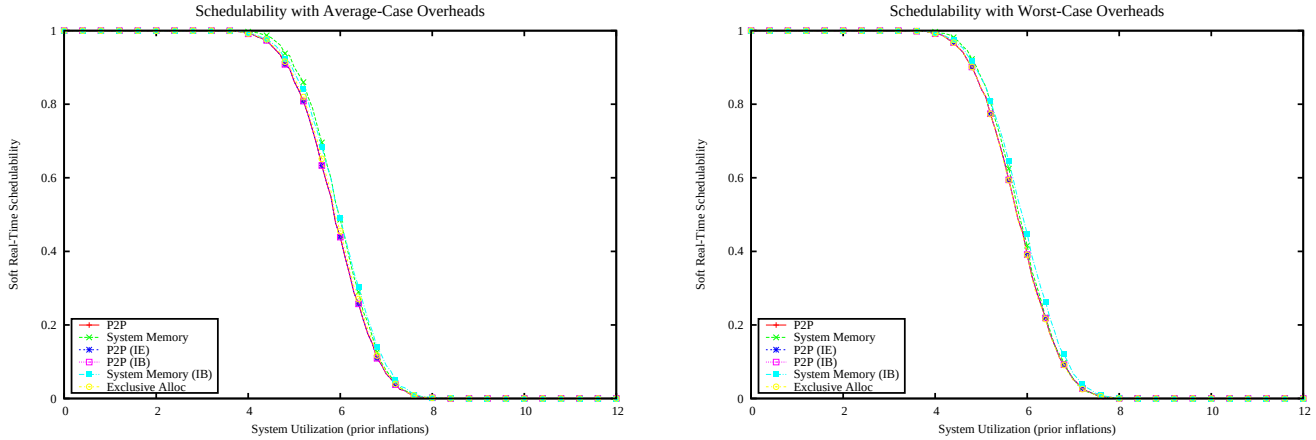

Figure 6025: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

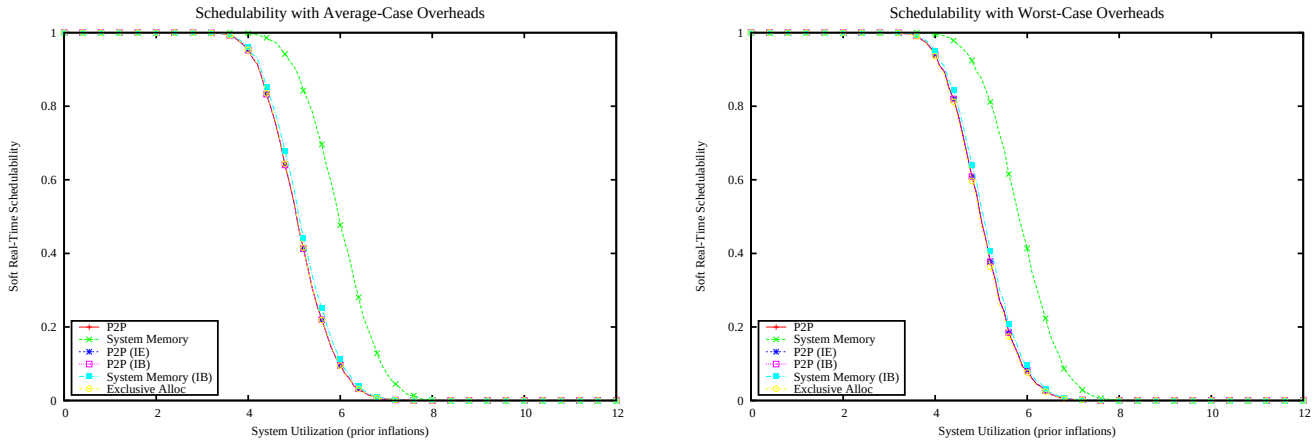

Figure 6026: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

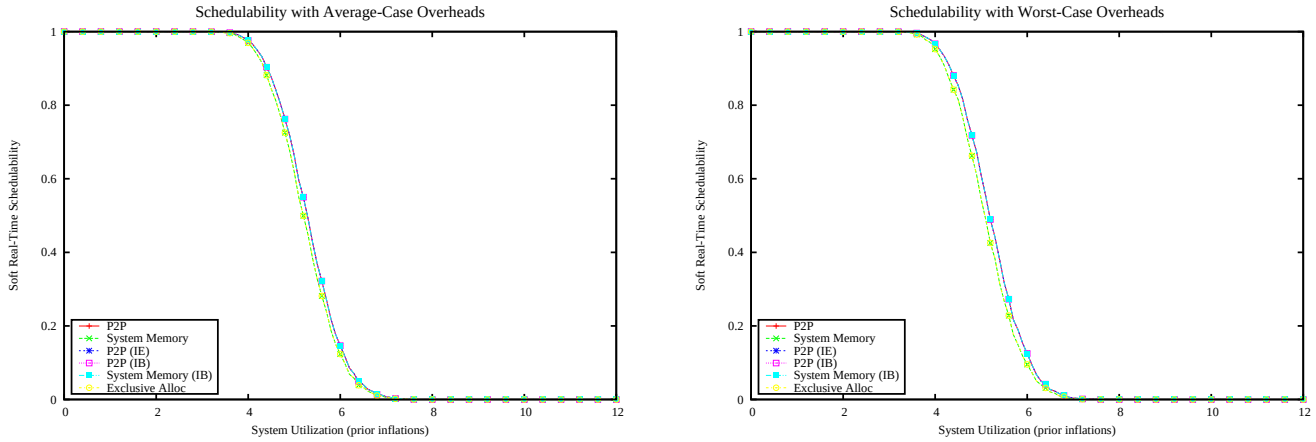

Figure 6027: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

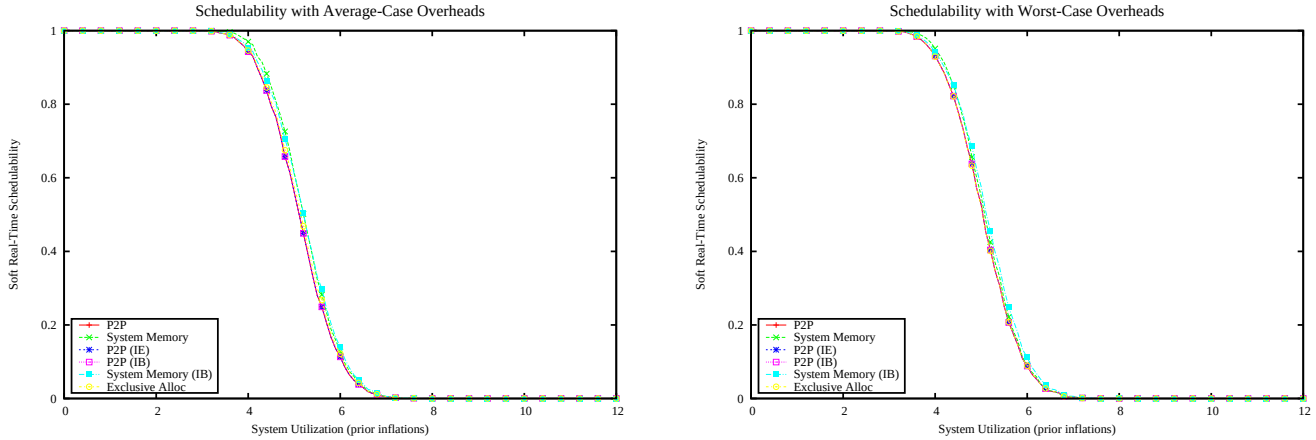

Figure 6028: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

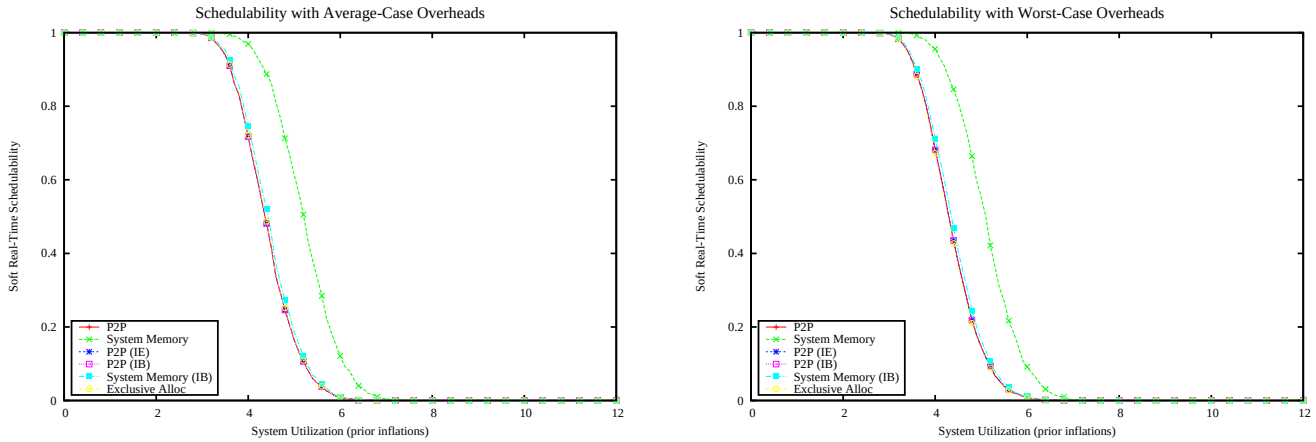

Figure 6029: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

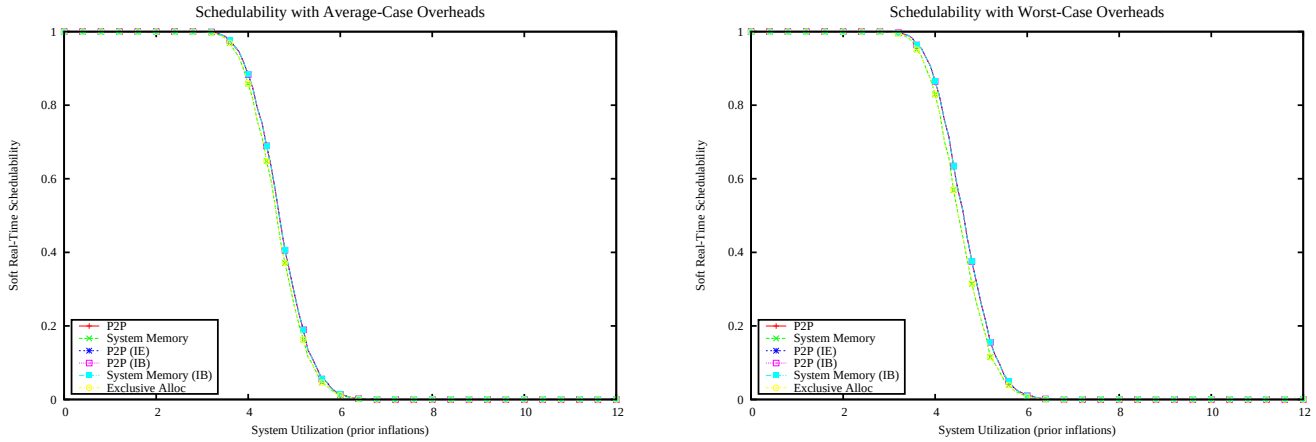

Figure 6030: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

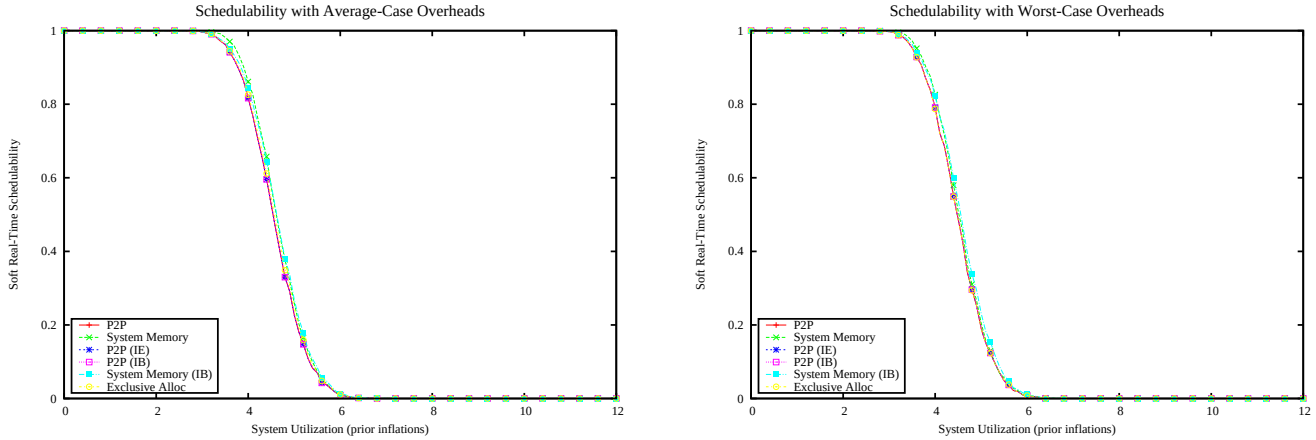

Figure 6031: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

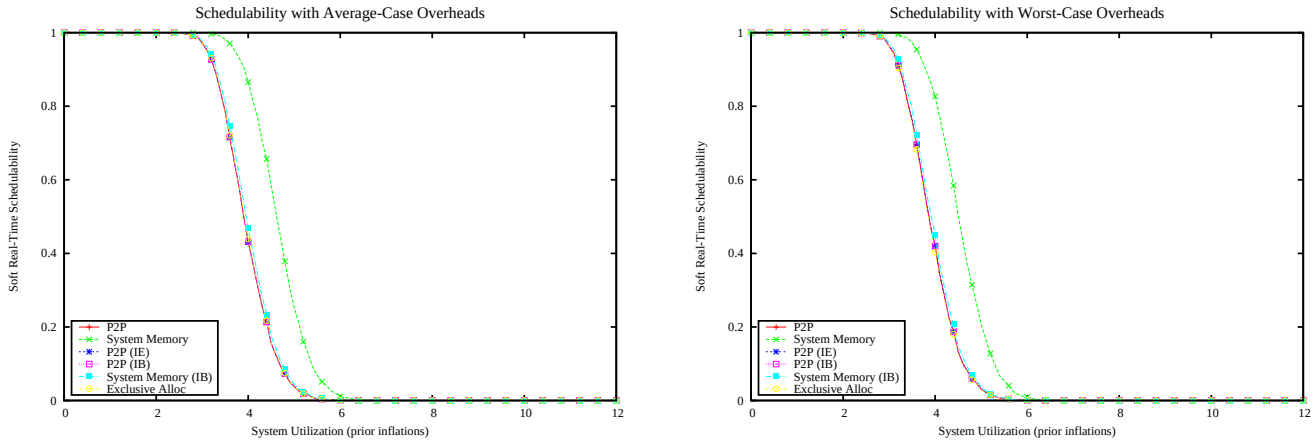

Figure 6032: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

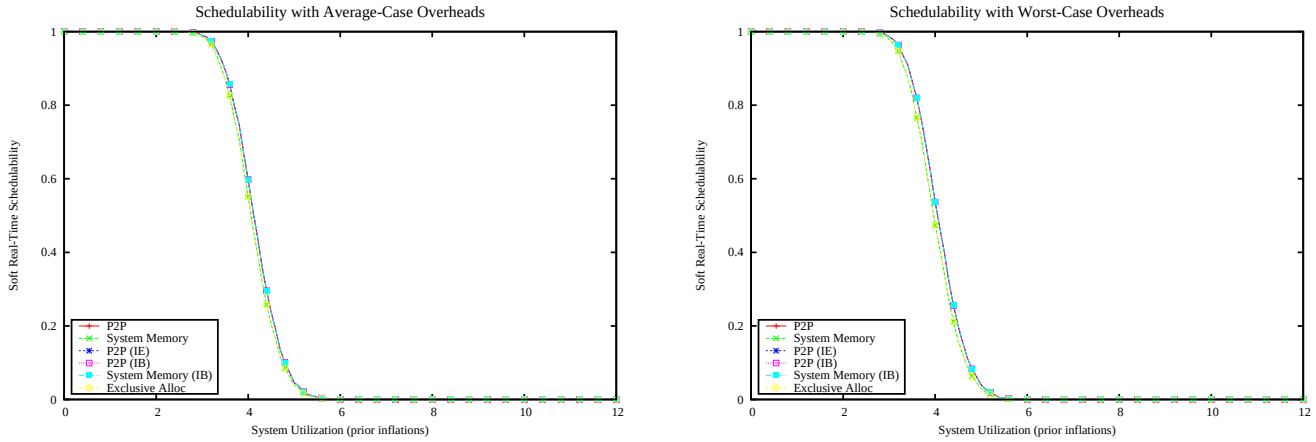

Figure 6033: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

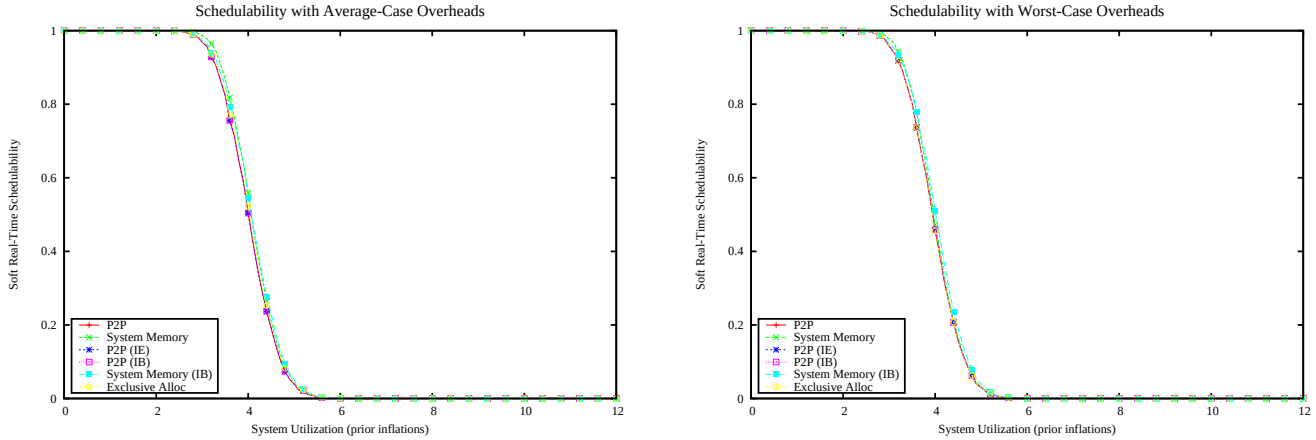

Figure 6034: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

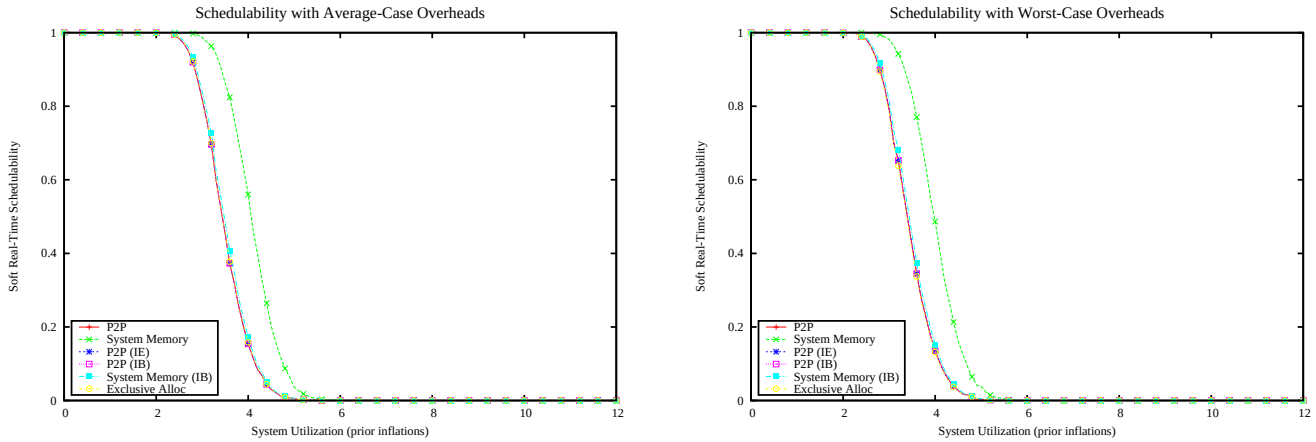

Figure 6035: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

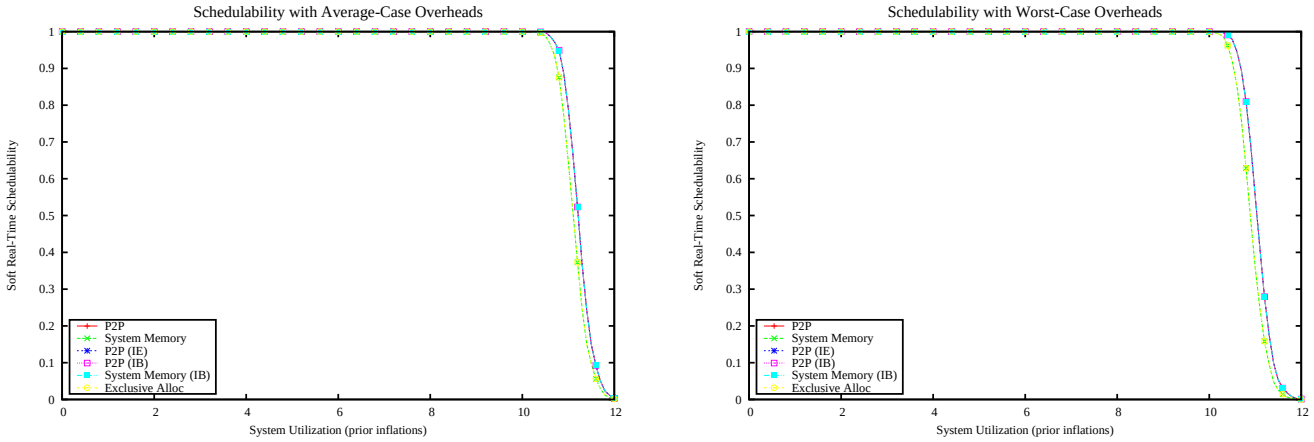

Figure 6036: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

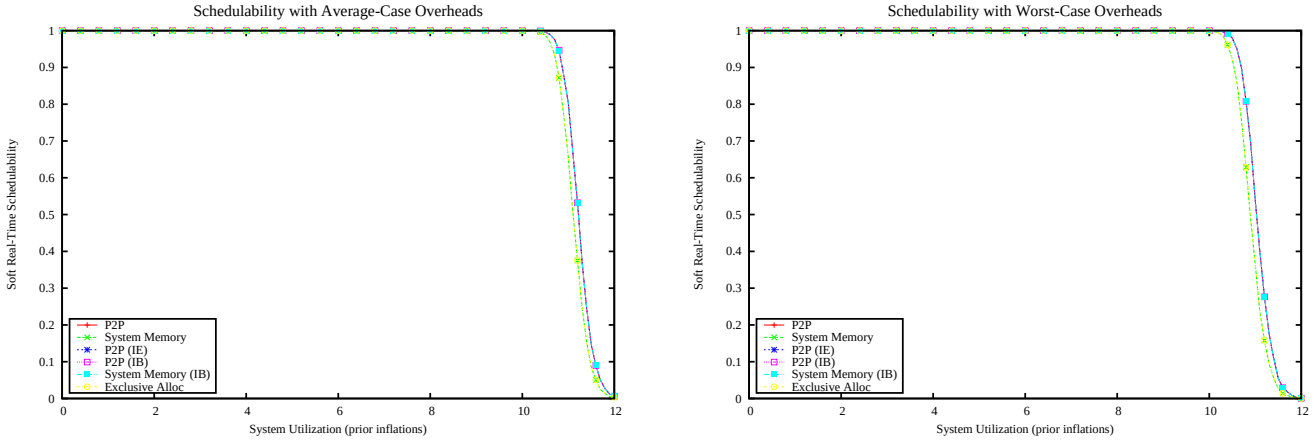

Figure 6037: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

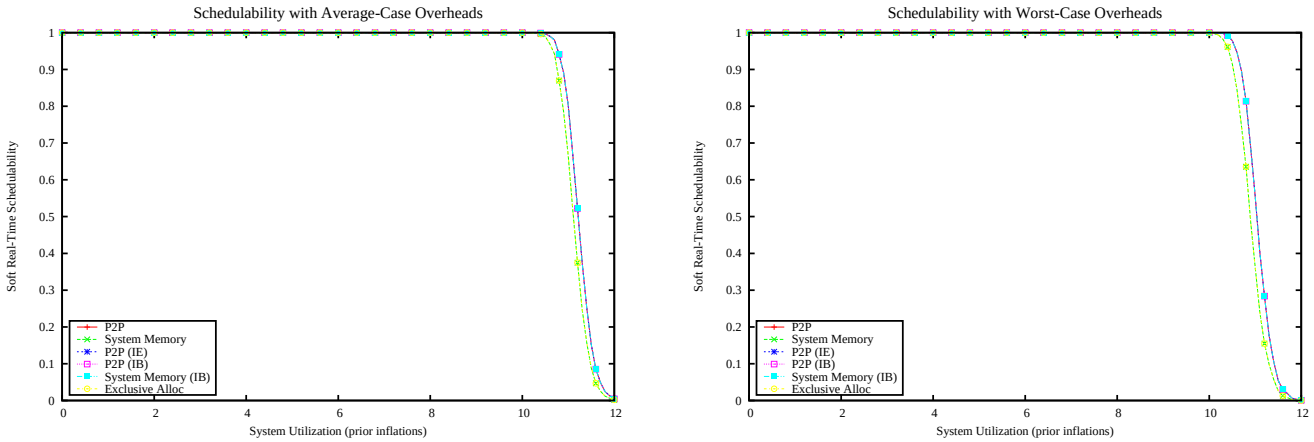

Figure 6038: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

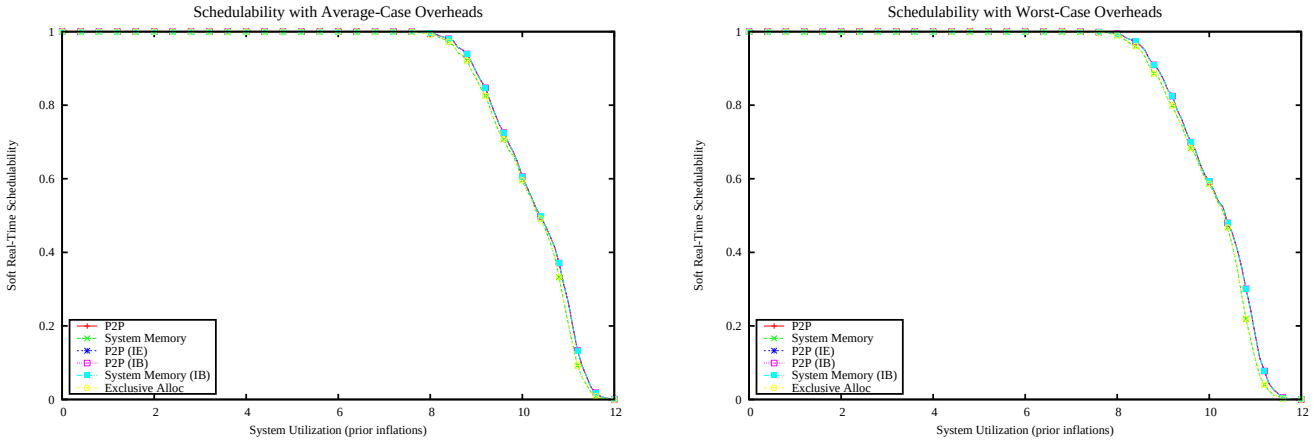

Figure 6039: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

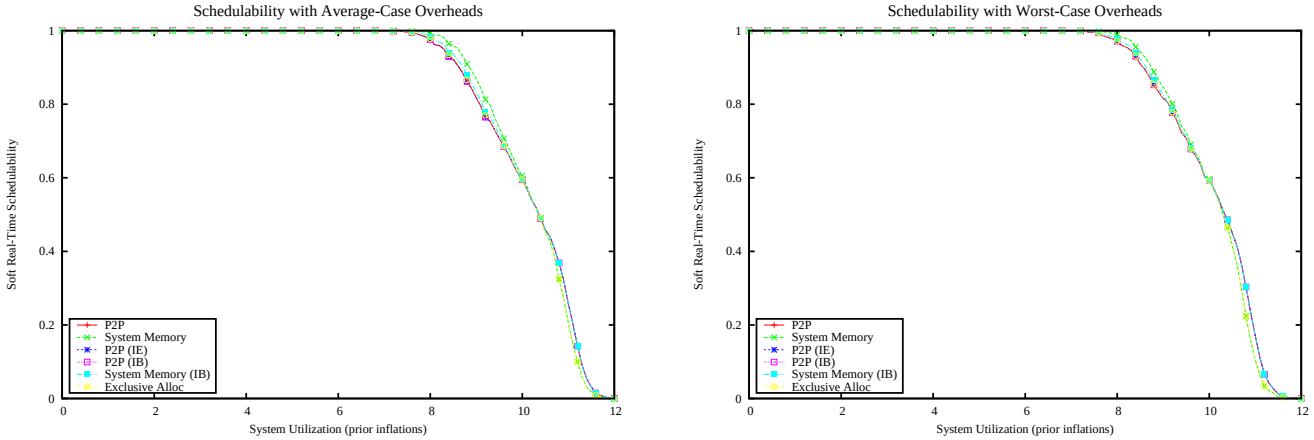

Figure 6040: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

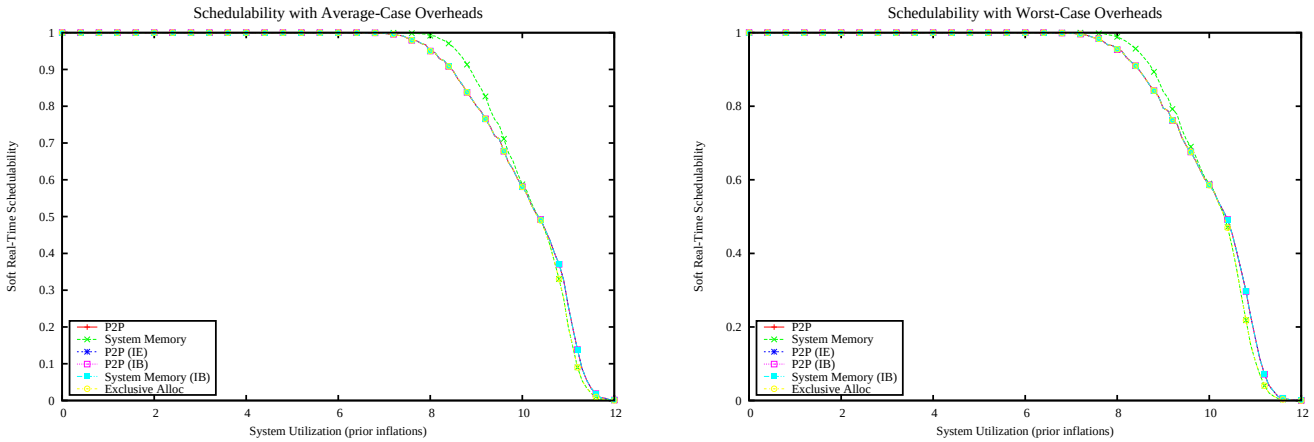

Figure 6041: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

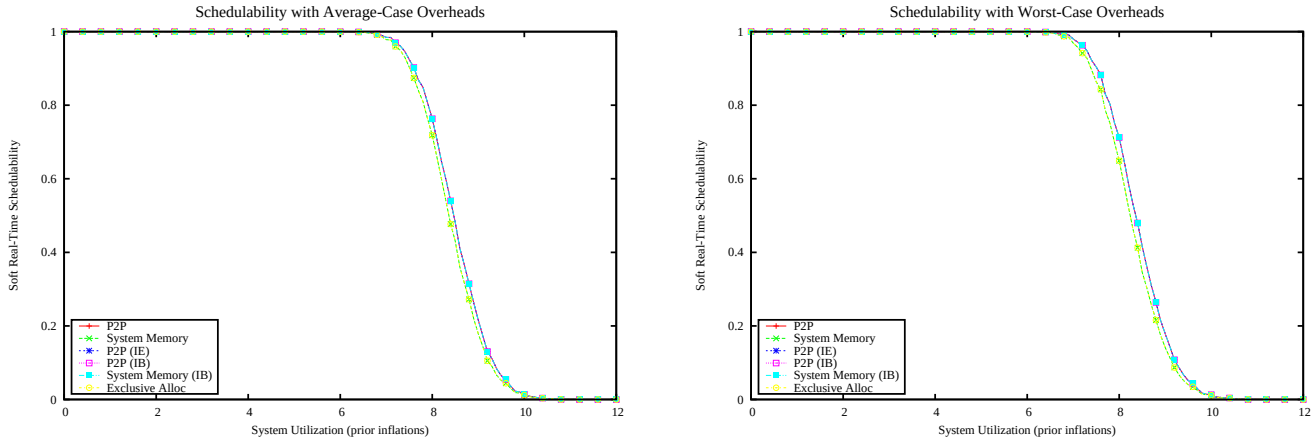

Figure 6042: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

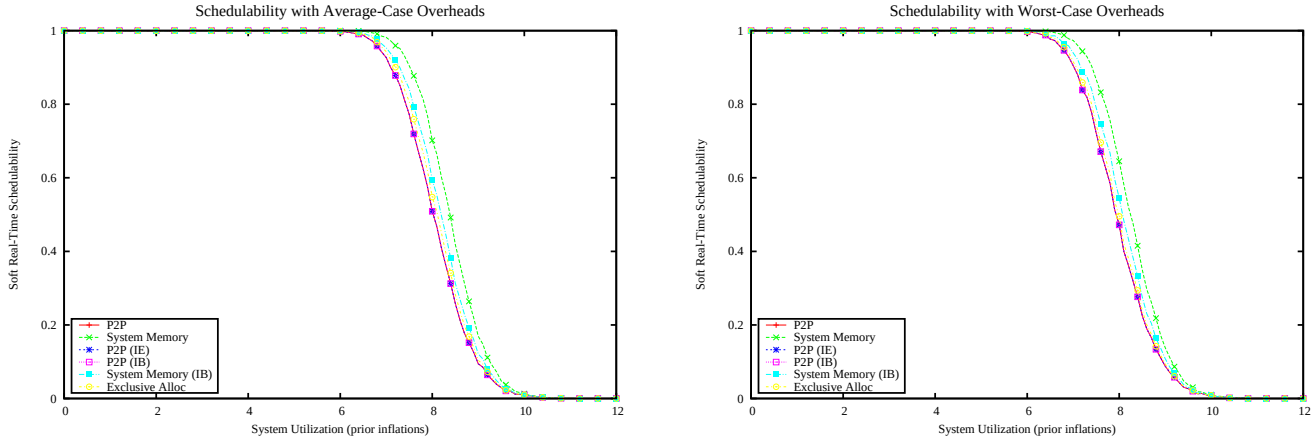

Figure 6043: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

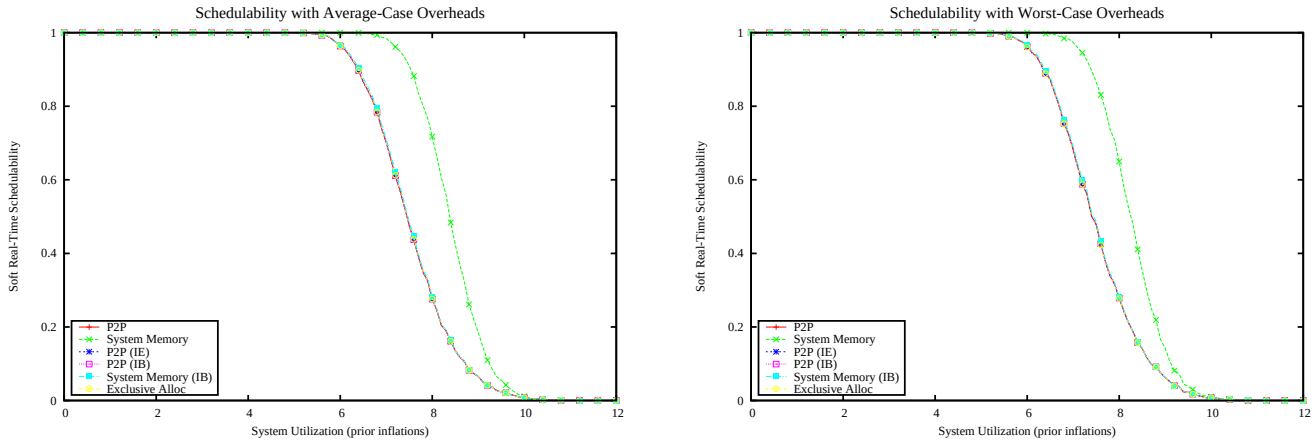

Figure 6044: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

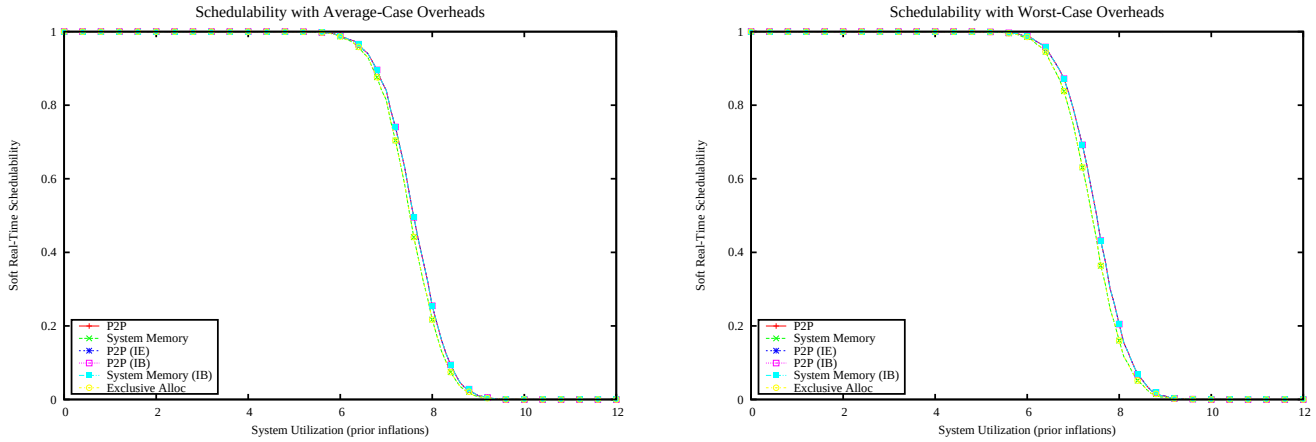

Figure 6045: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

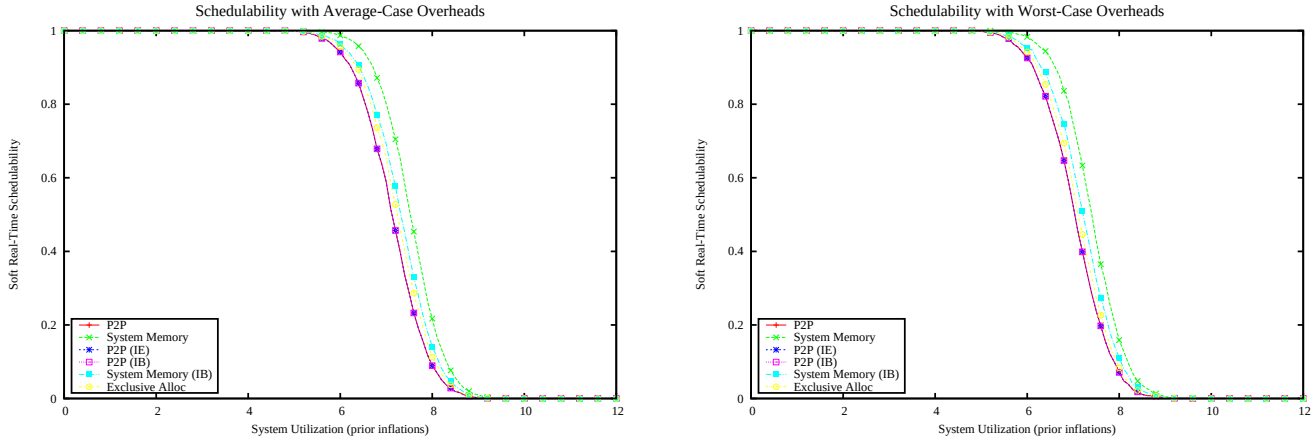

Figure 6046: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

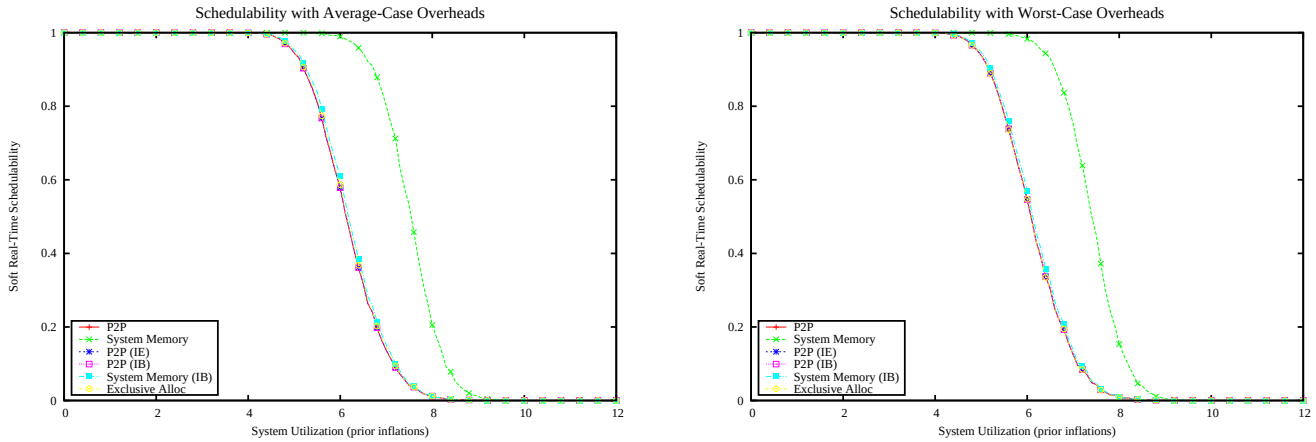

Figure 6047: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

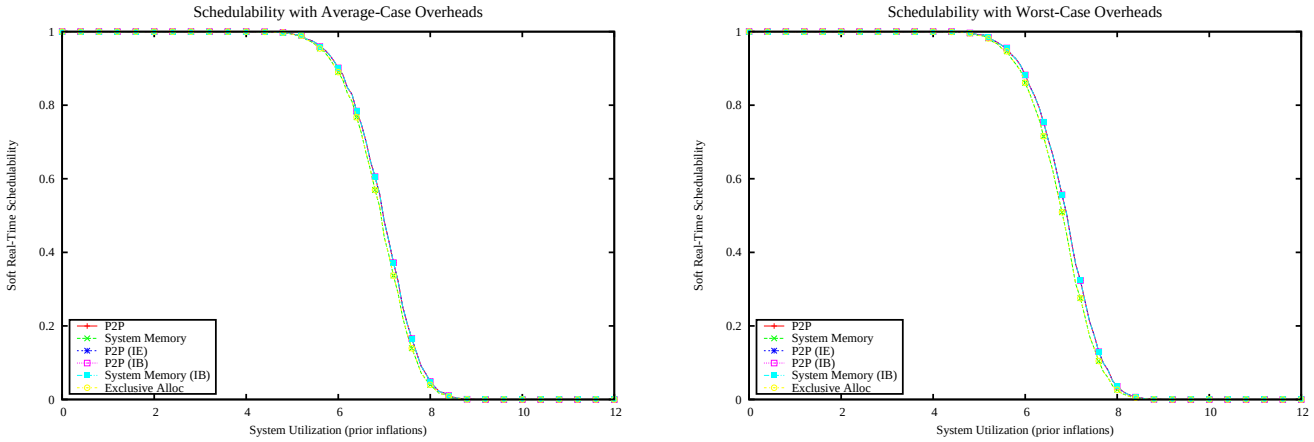

Figure 6048: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

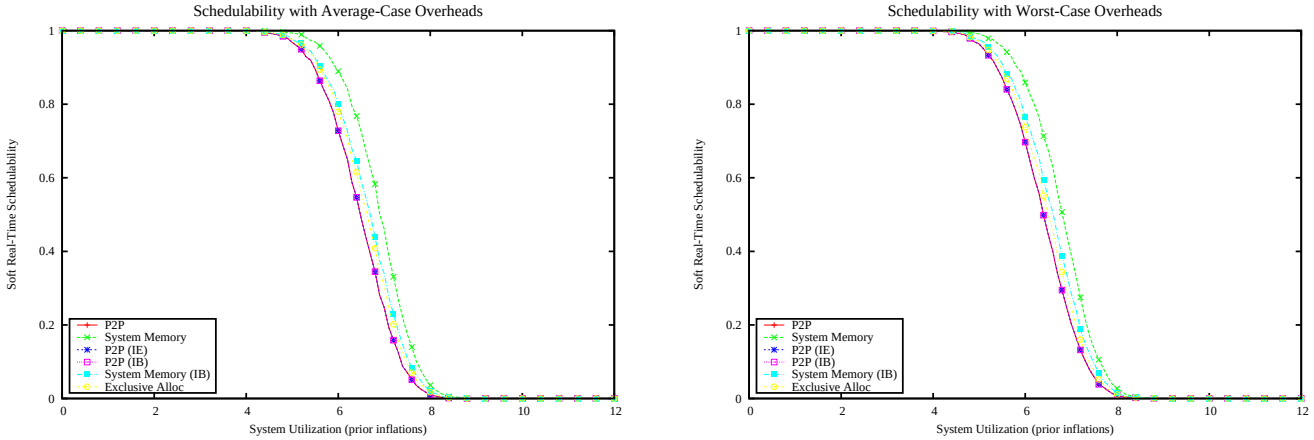

Figure 6049: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

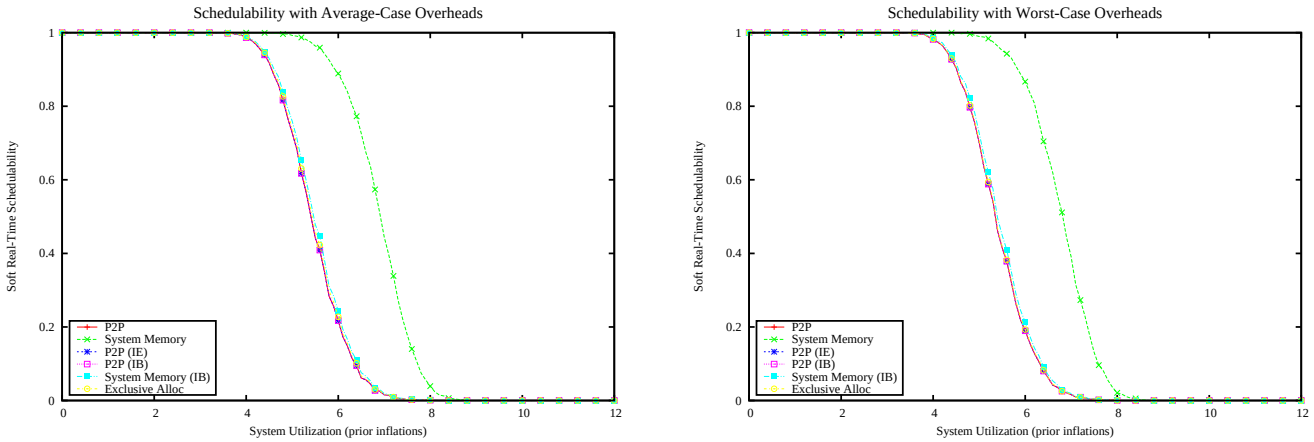

Figure 6050: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

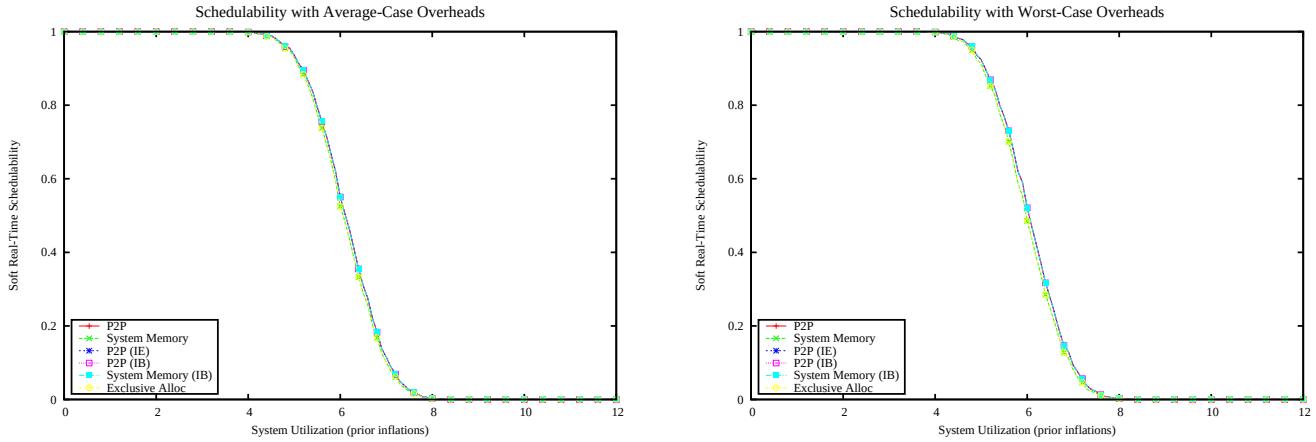

Figure 6051: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

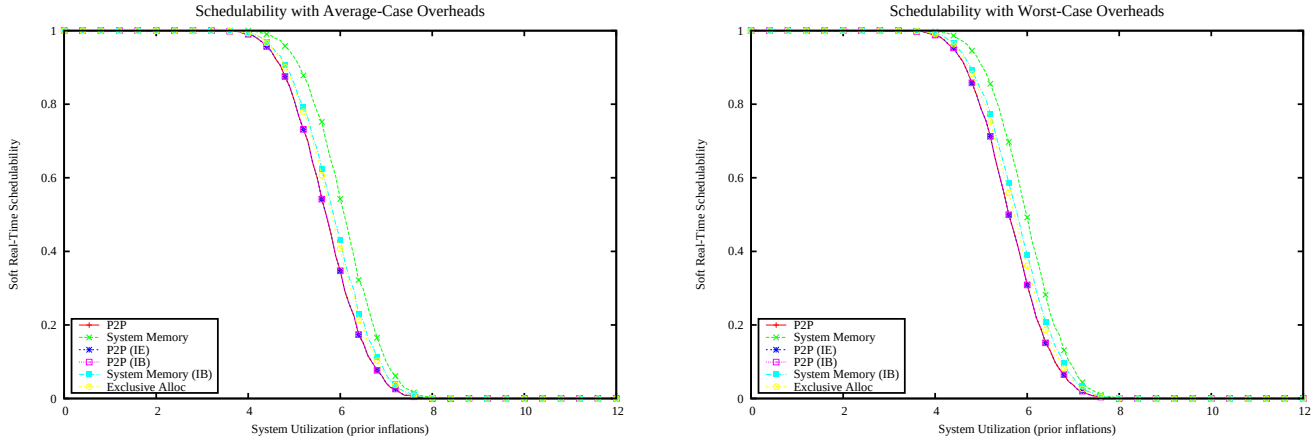

Figure 6052: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

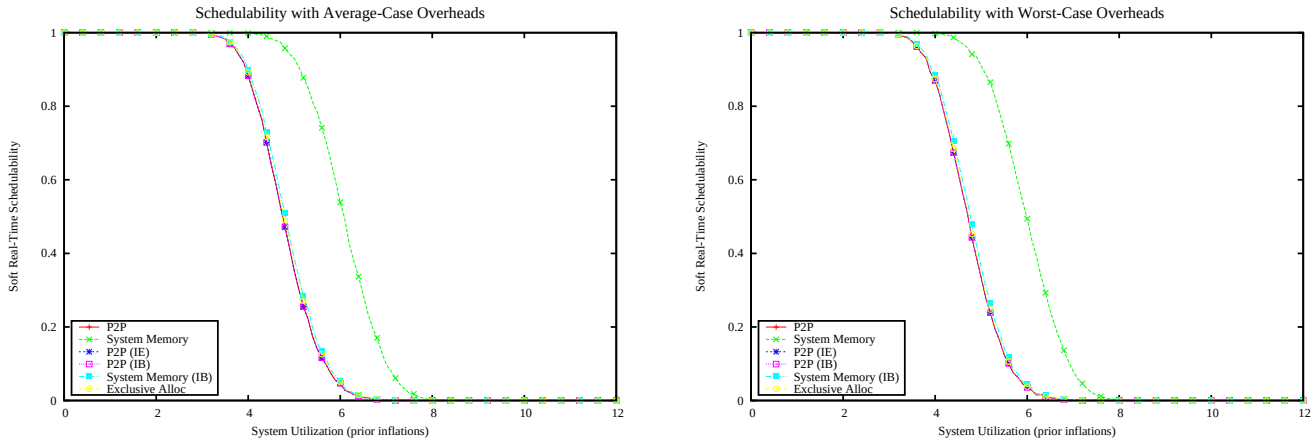

Figure 6053: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

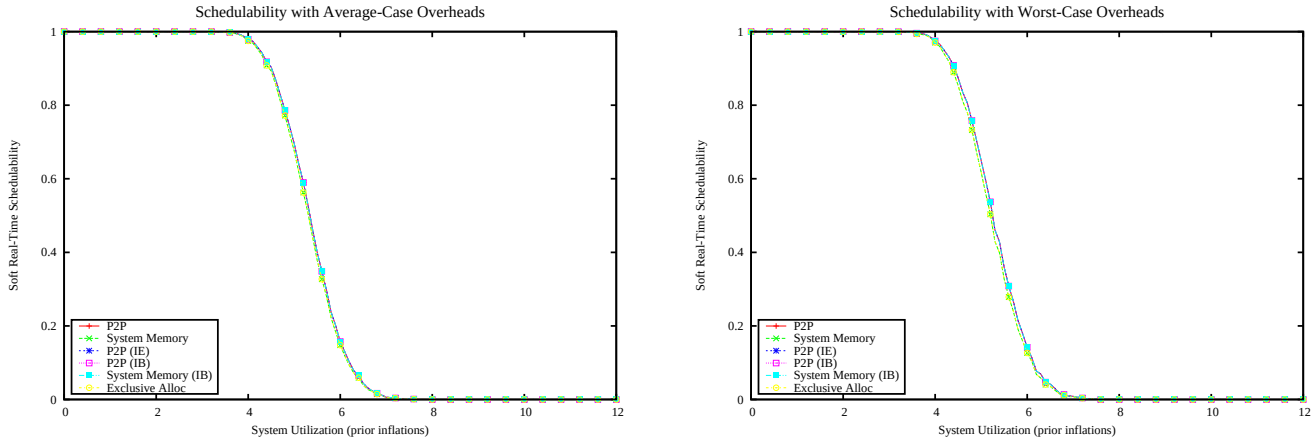

Figure 6054: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

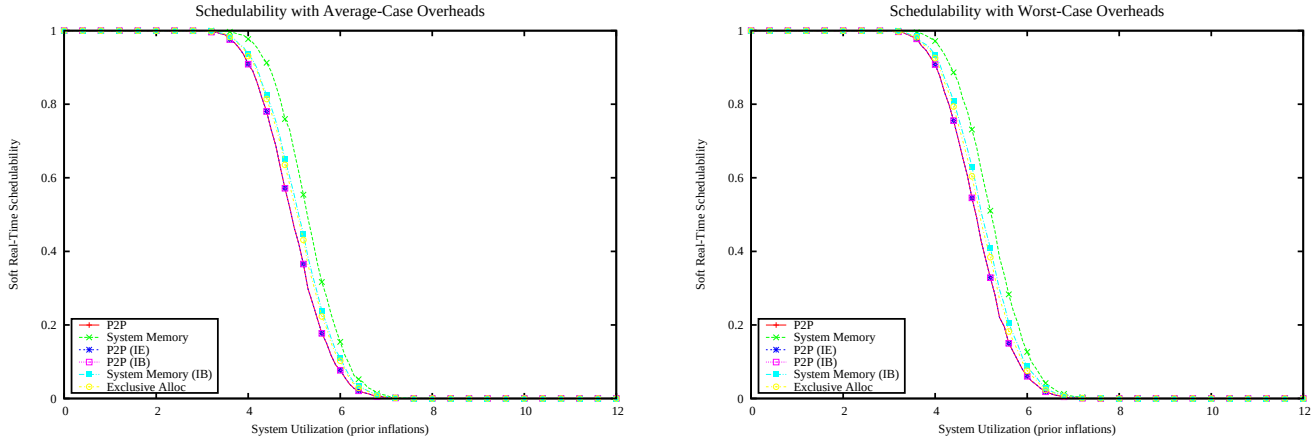

Figure 6055: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

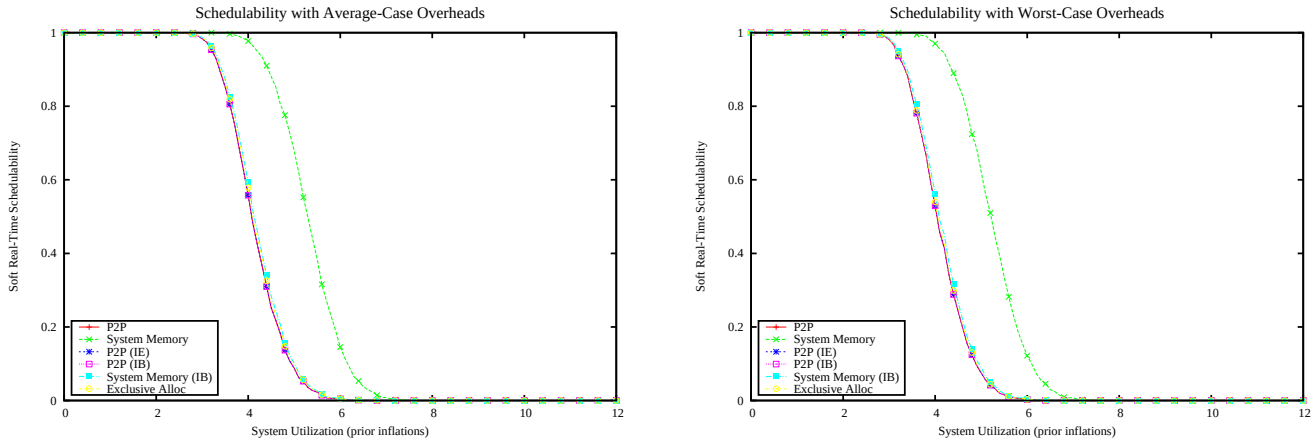

Figure 6056: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

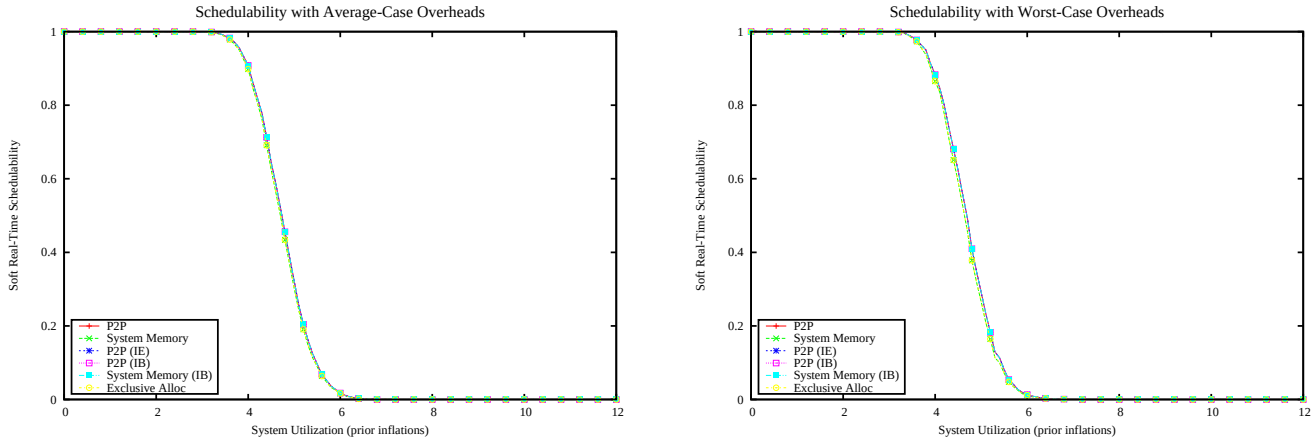

Figure 6057: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

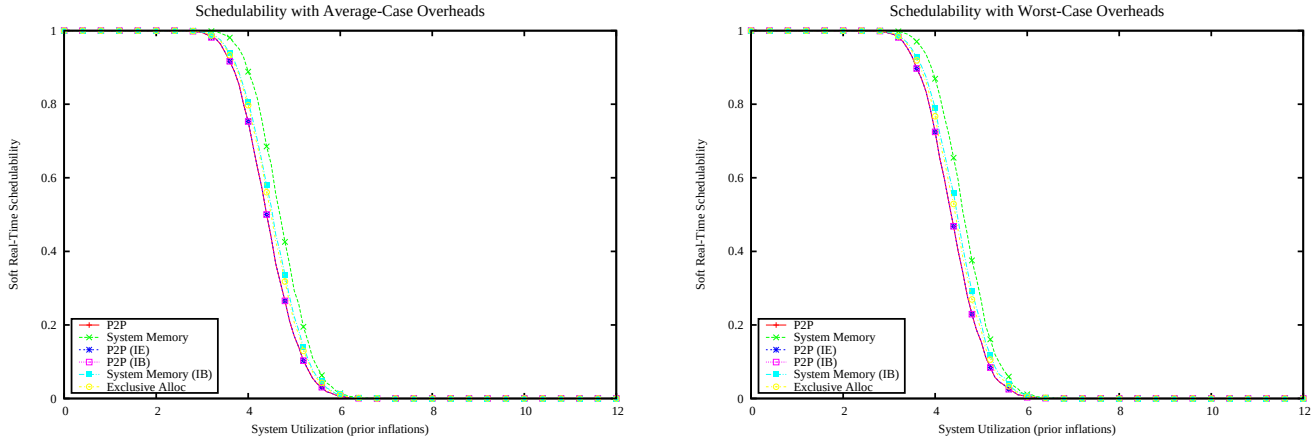

Figure 6058: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

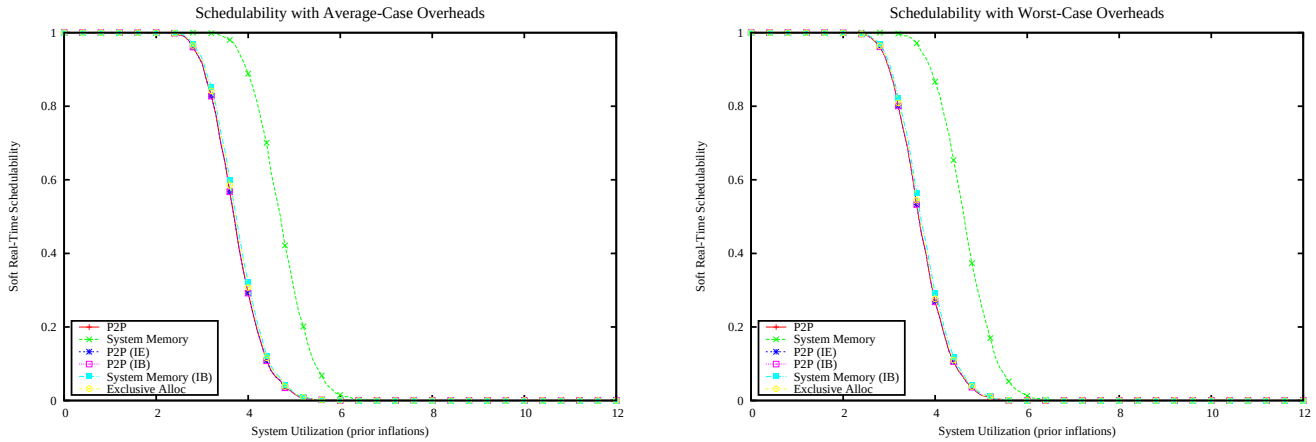

Figure 6059: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

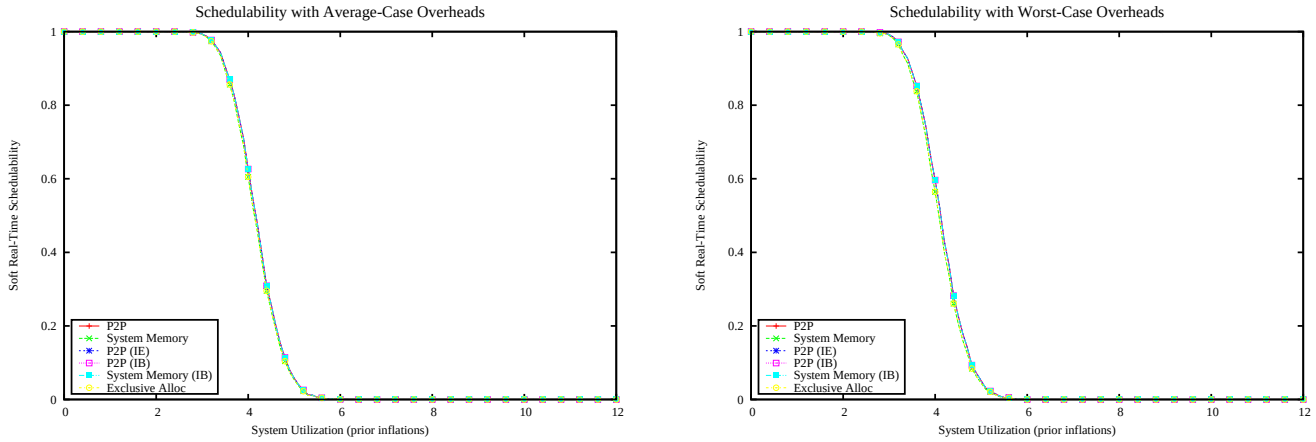

Figure 6060: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

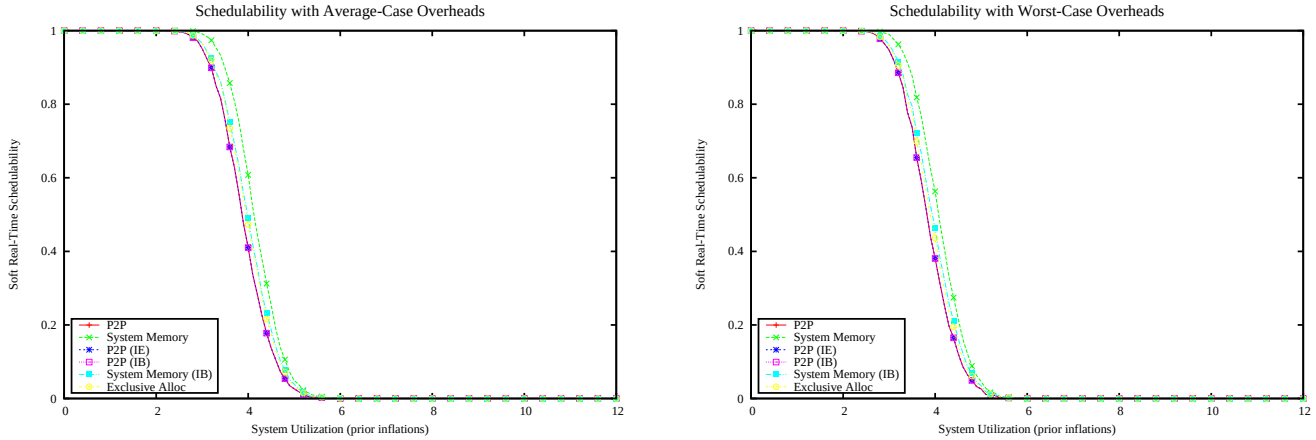

Figure 6061: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

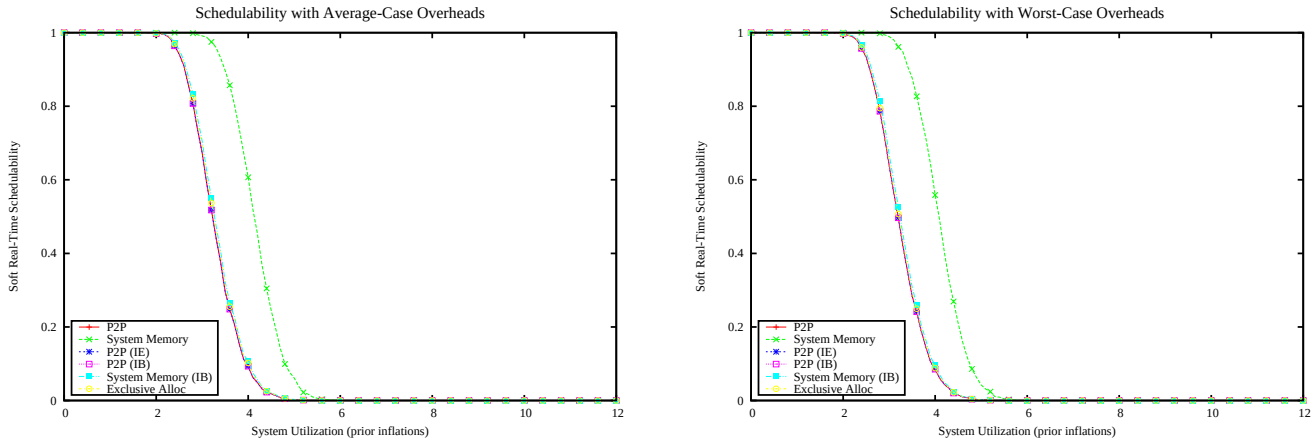

Figure 6062: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

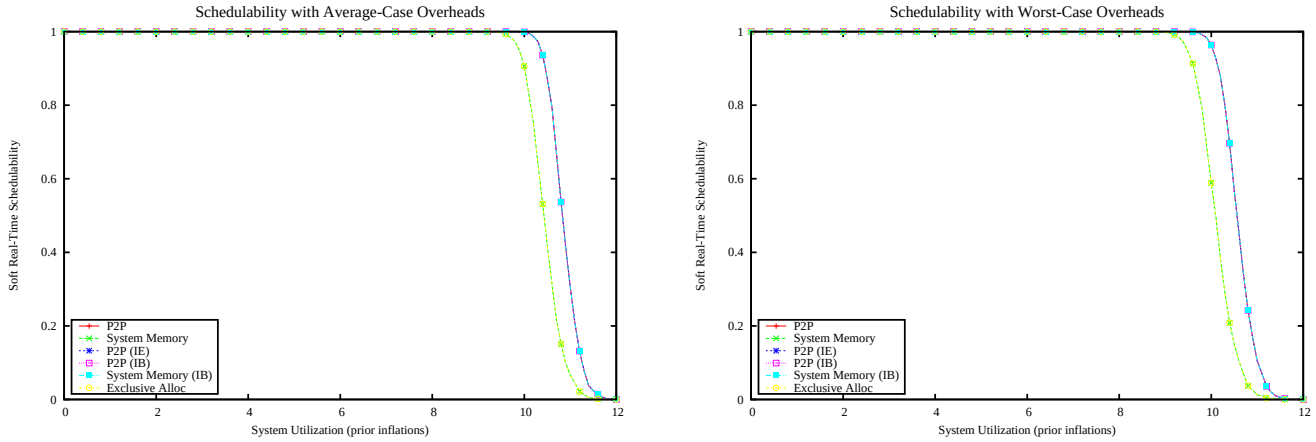

Figure 6063: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

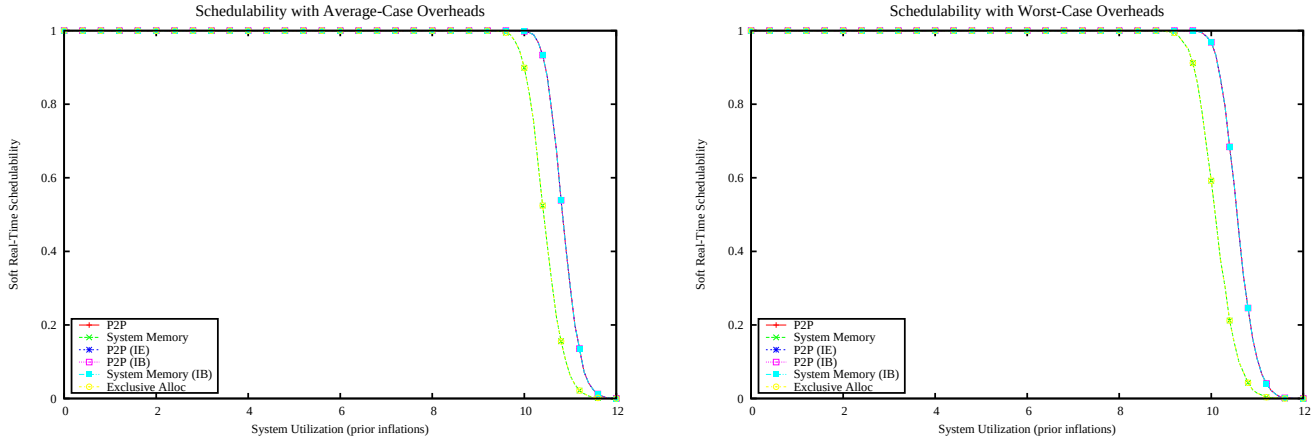

Figure 6064: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

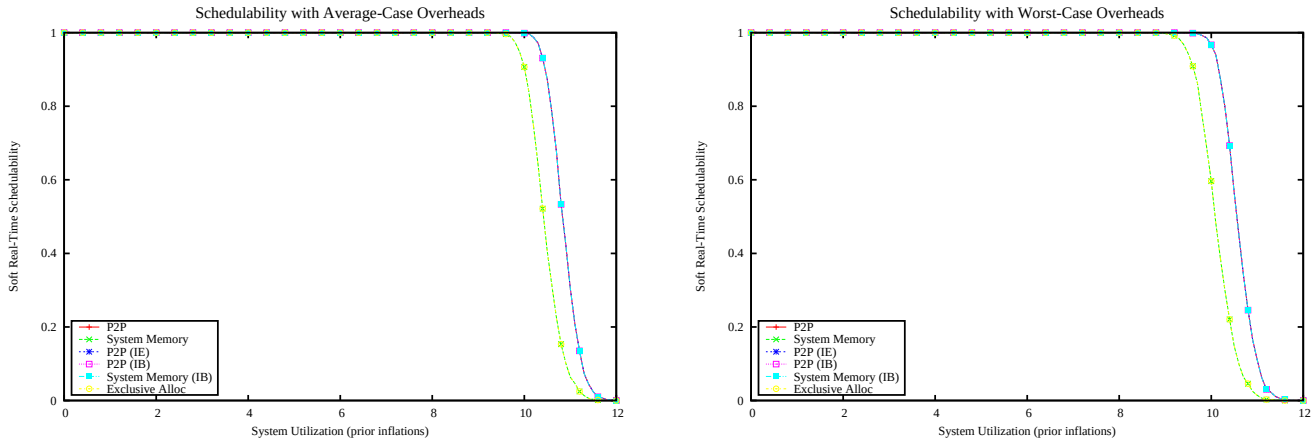

Figure 6065: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

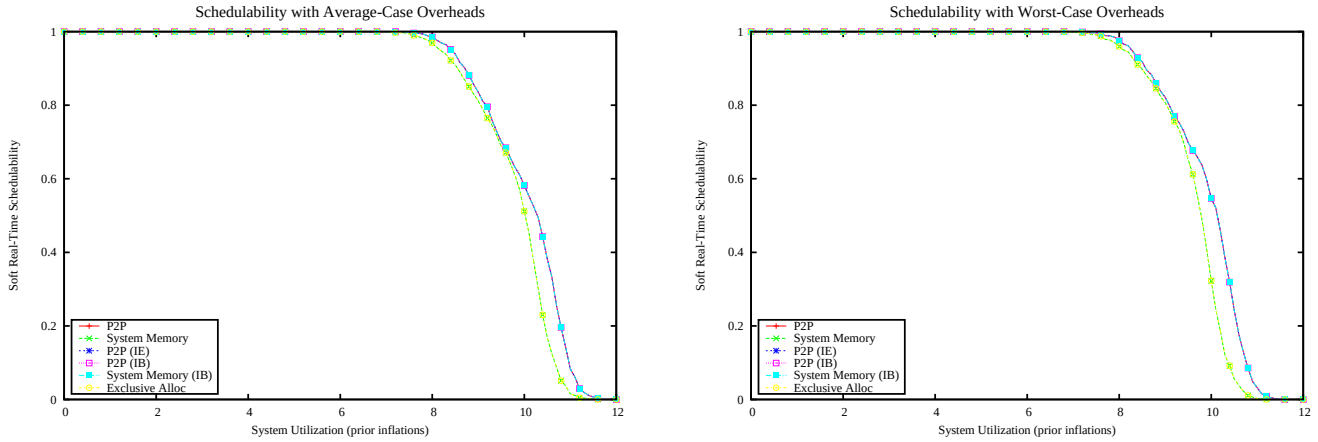

Figure 6066: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

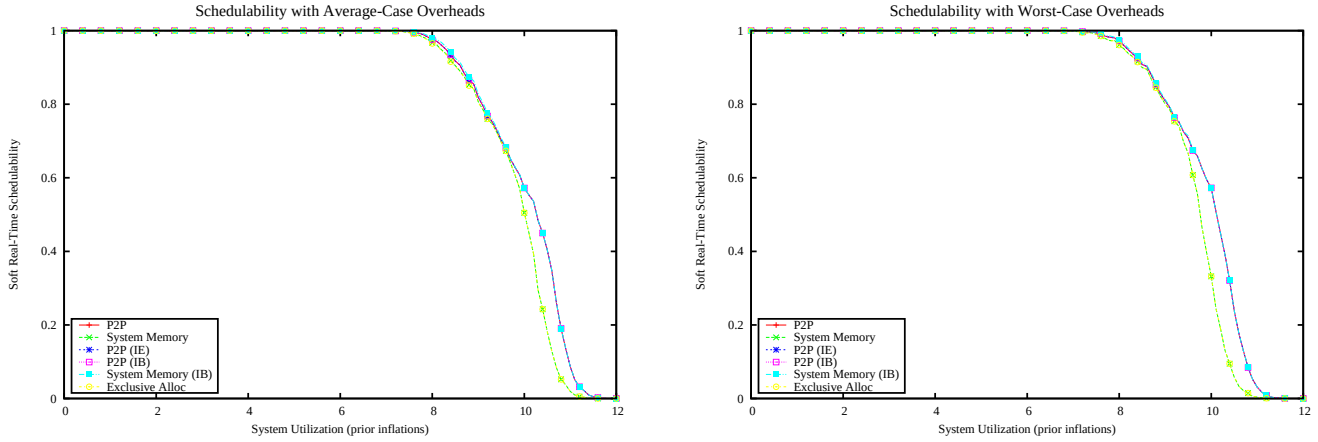

Figure 6067: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

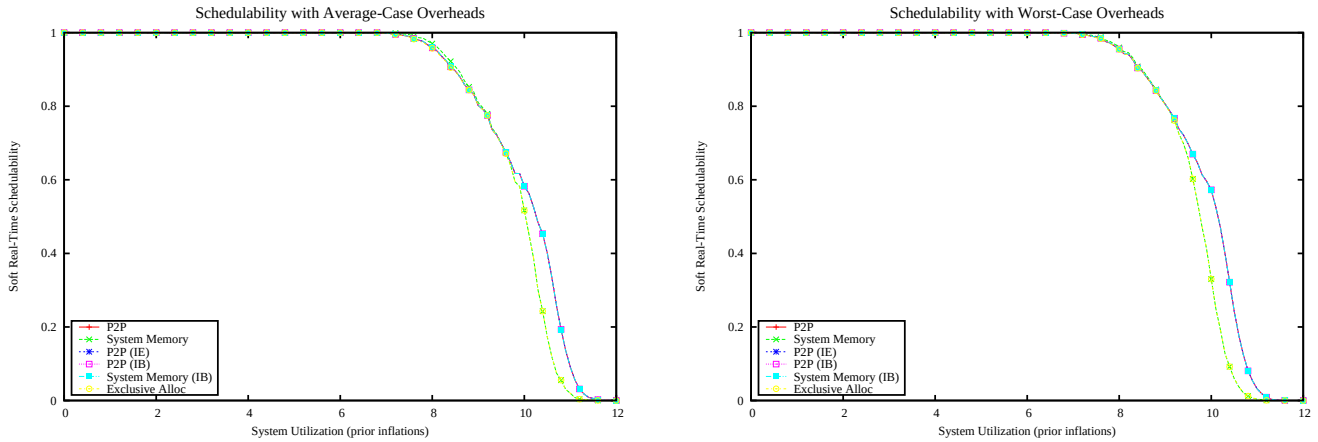

Figure 6068: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

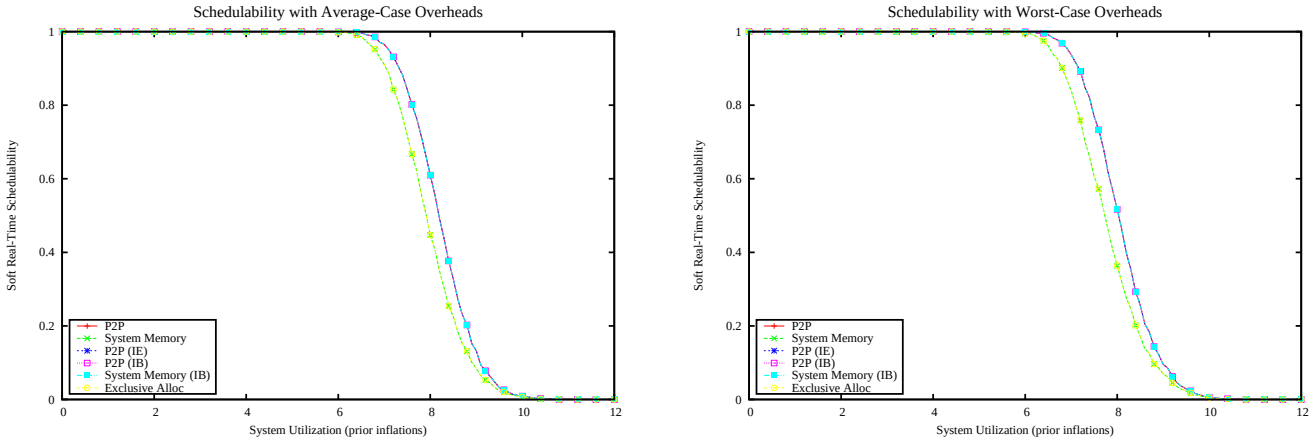

Figure 6069: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

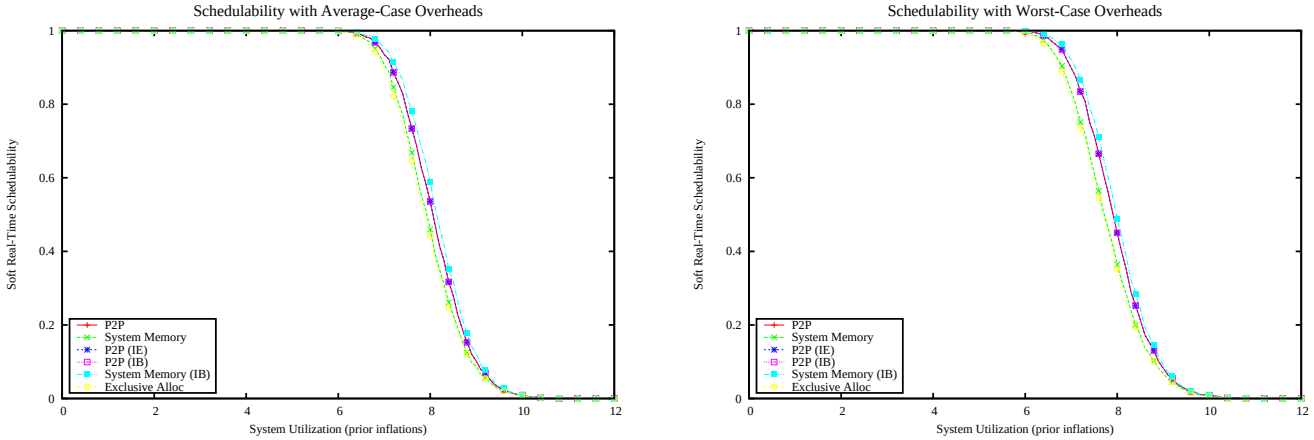

Figure 6070: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

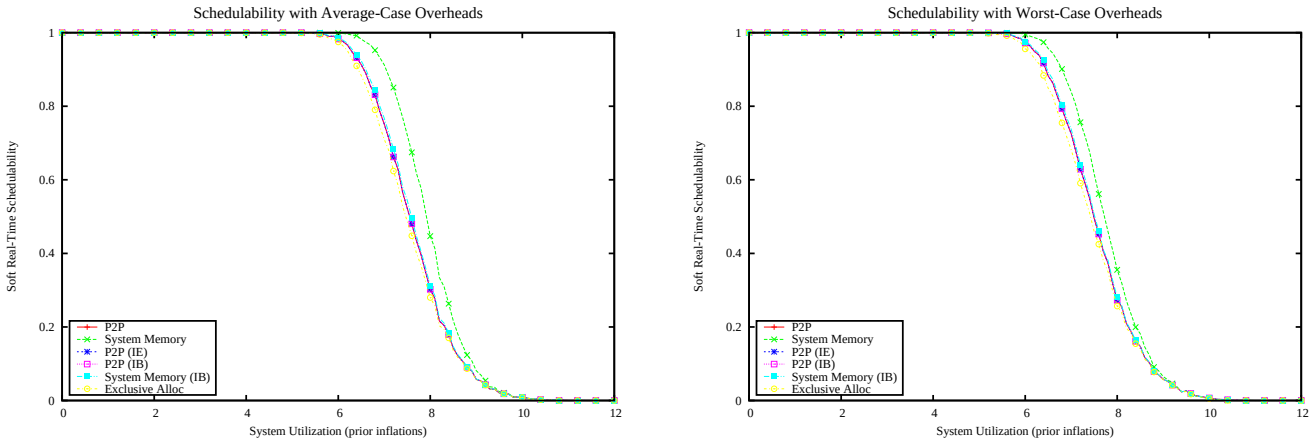

Figure 6071: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

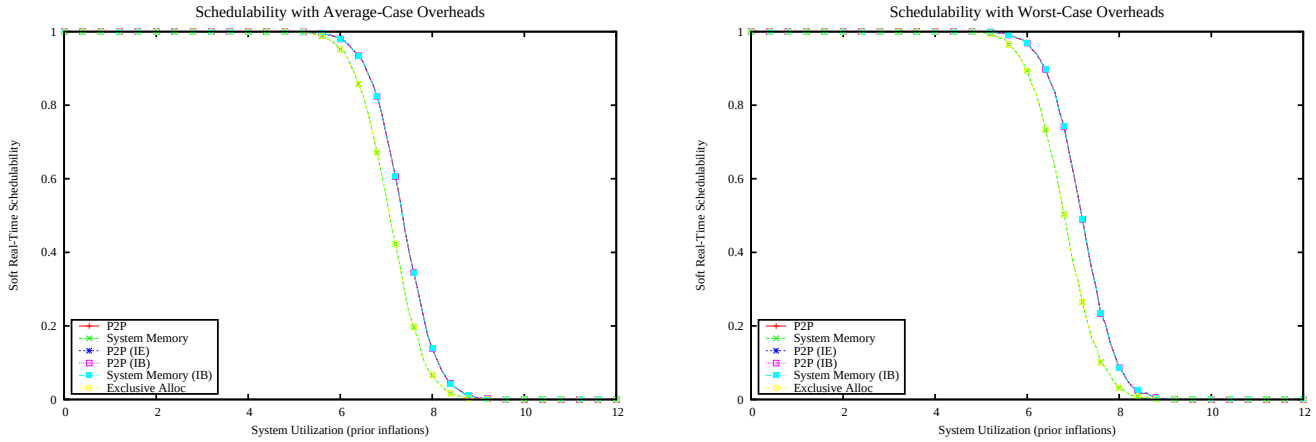

Figure 6072: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

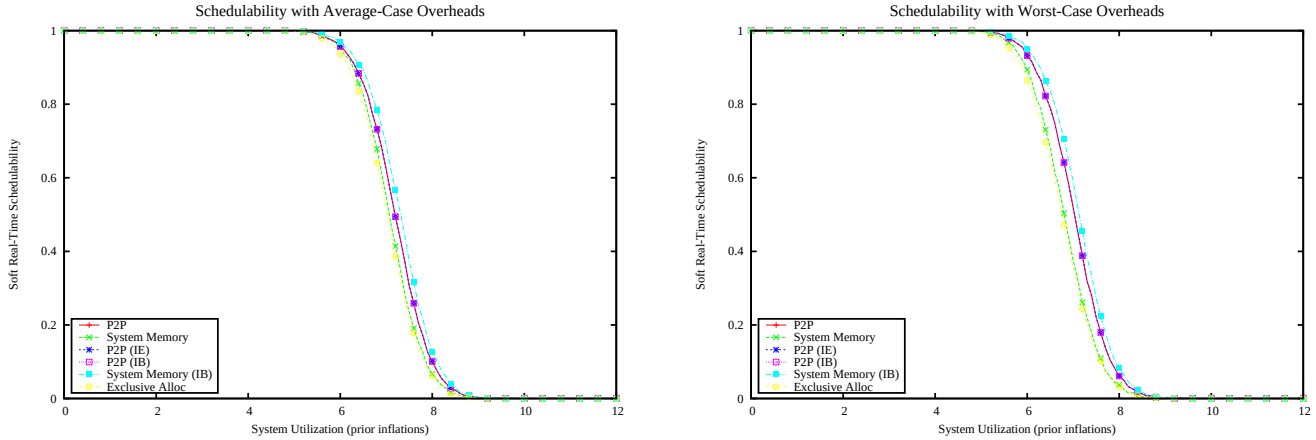

Figure 6073: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

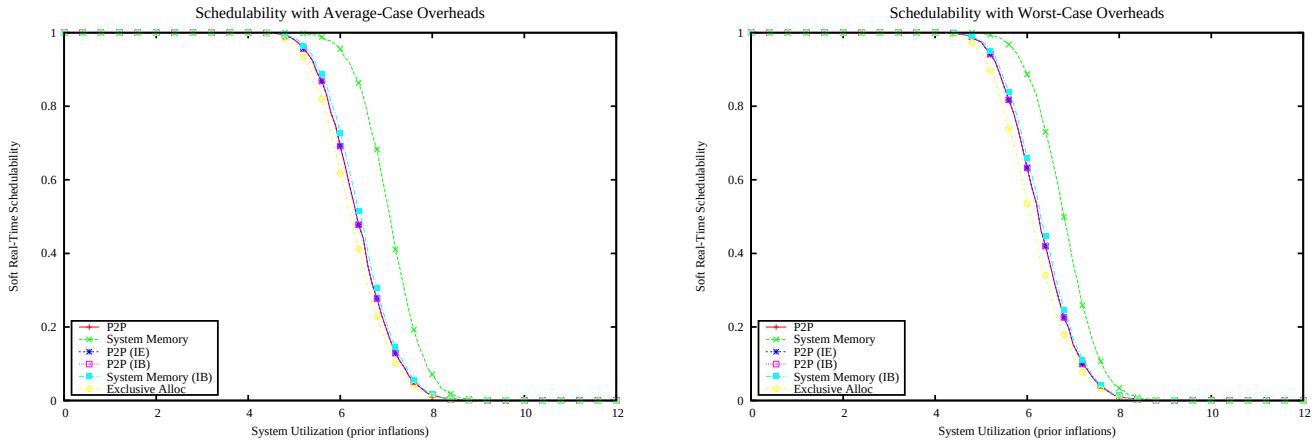

Figure 6074: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

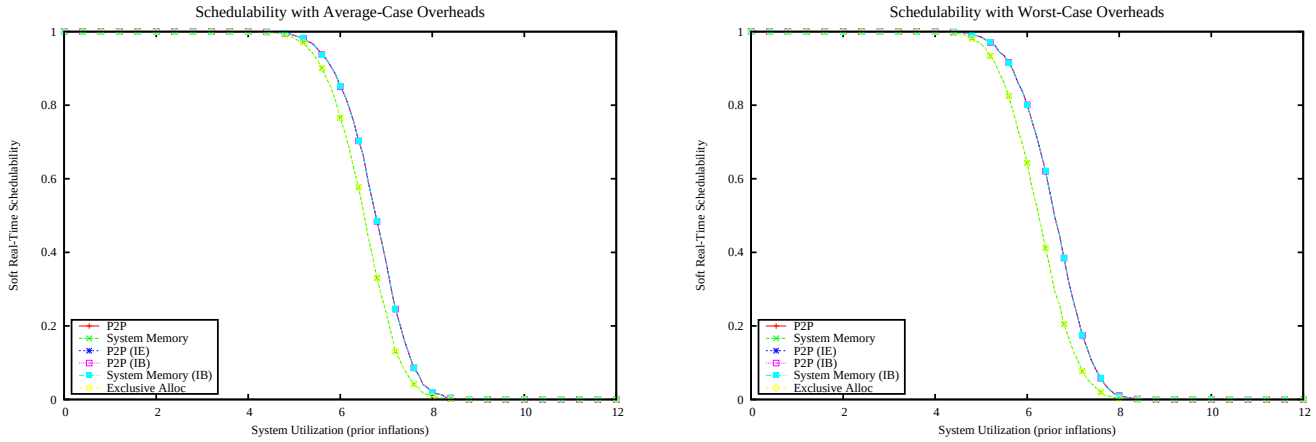

Figure 6075: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

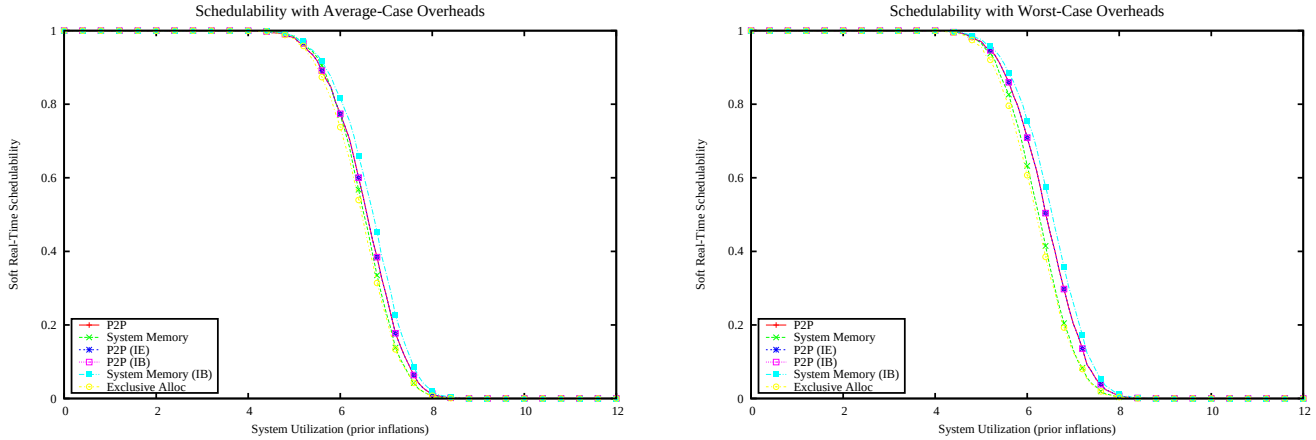

Figure 6076: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

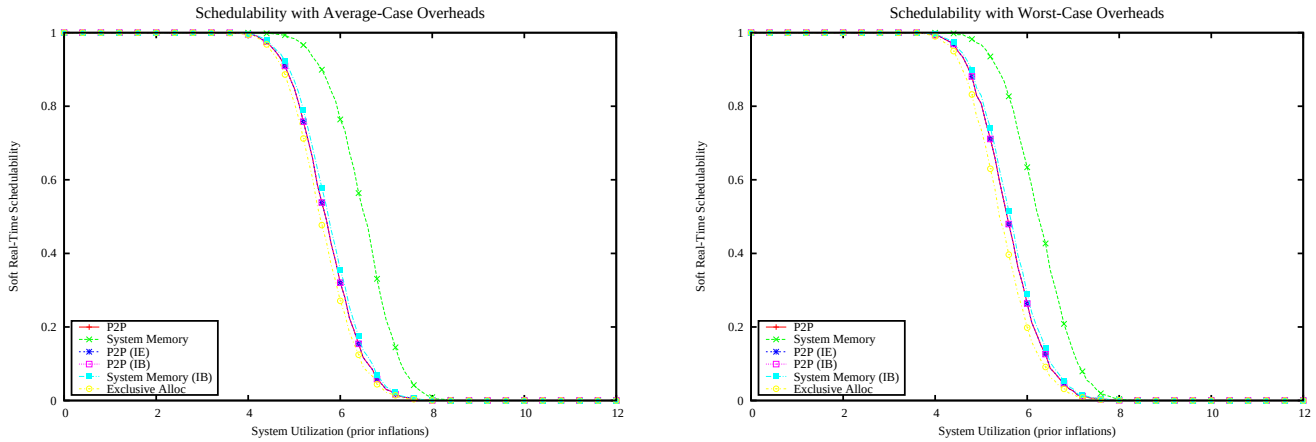

Figure 6077: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

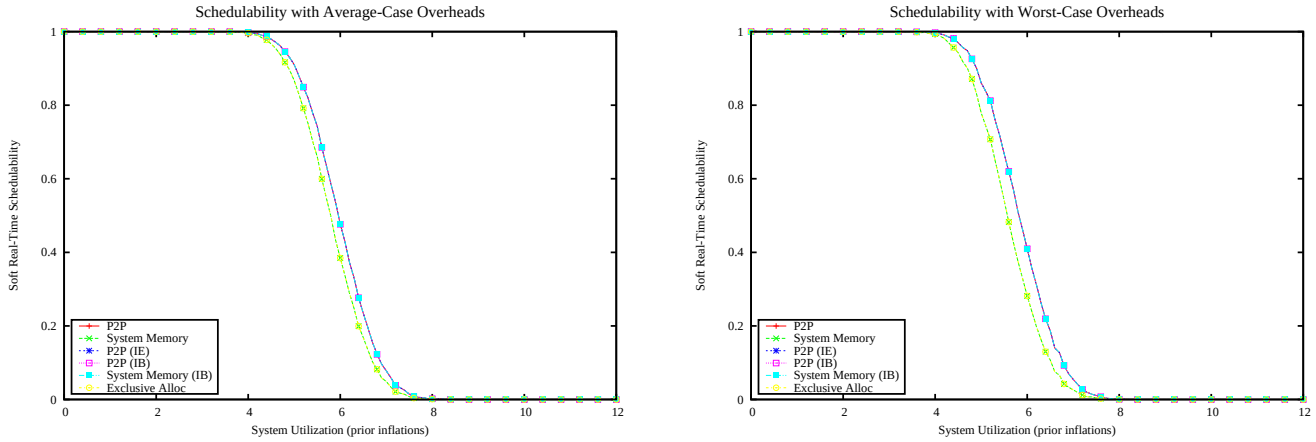

Figure 6078: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

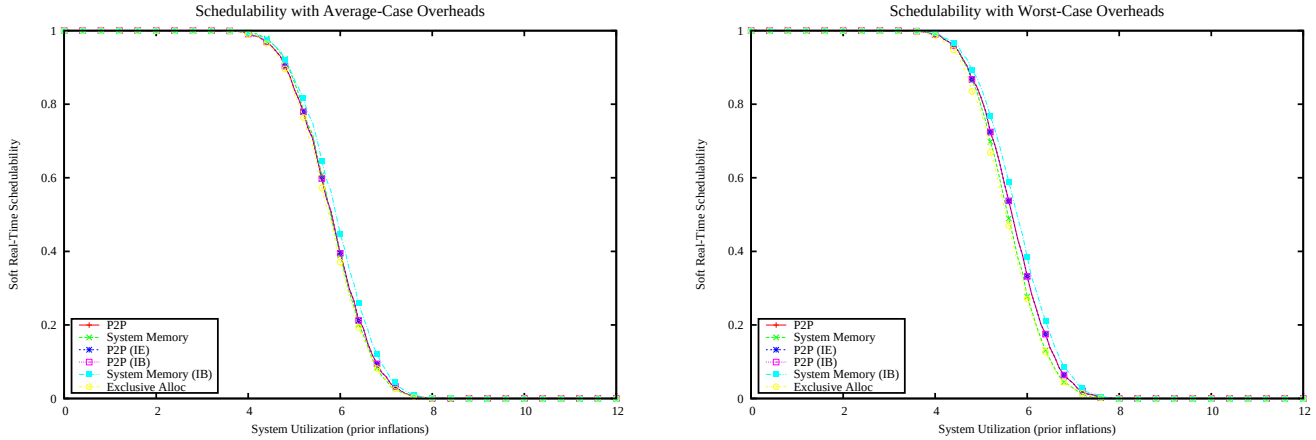

Figure 6079: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

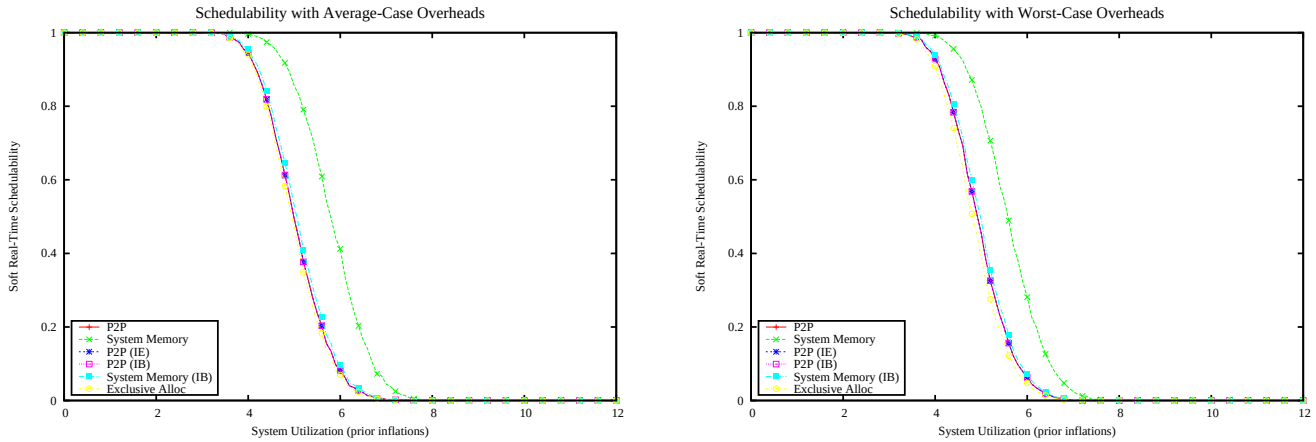

Figure 6080: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

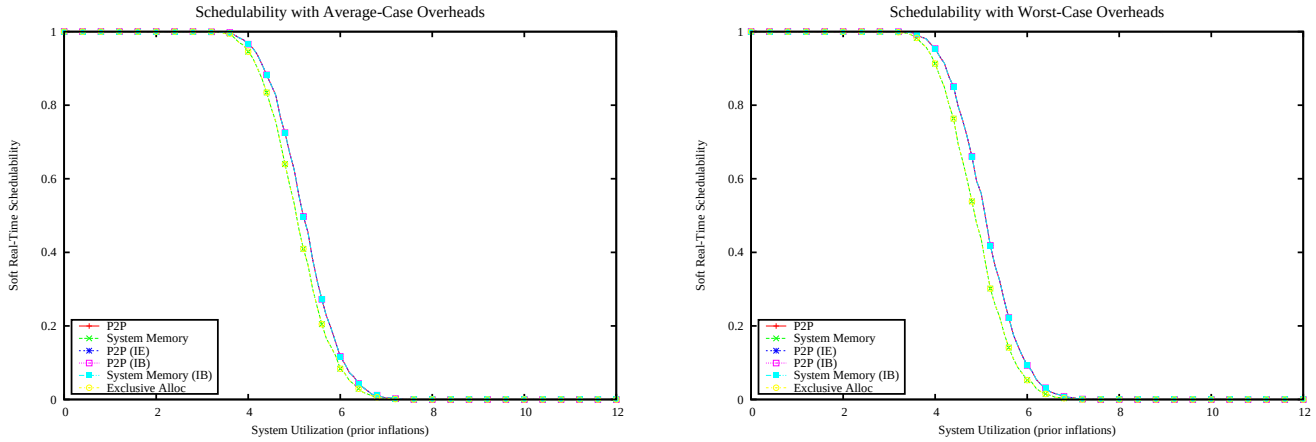

Figure 6081: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

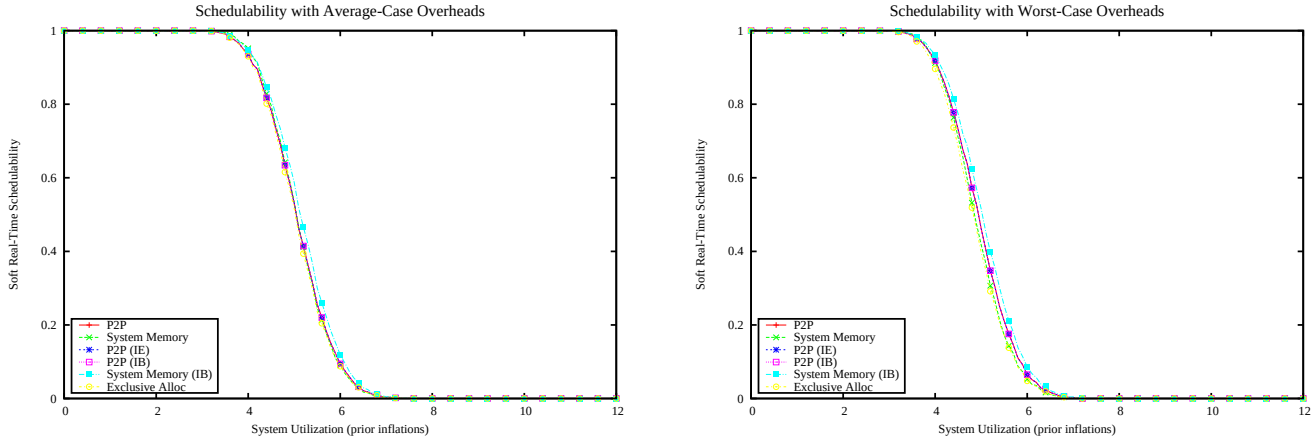

Figure 6082: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

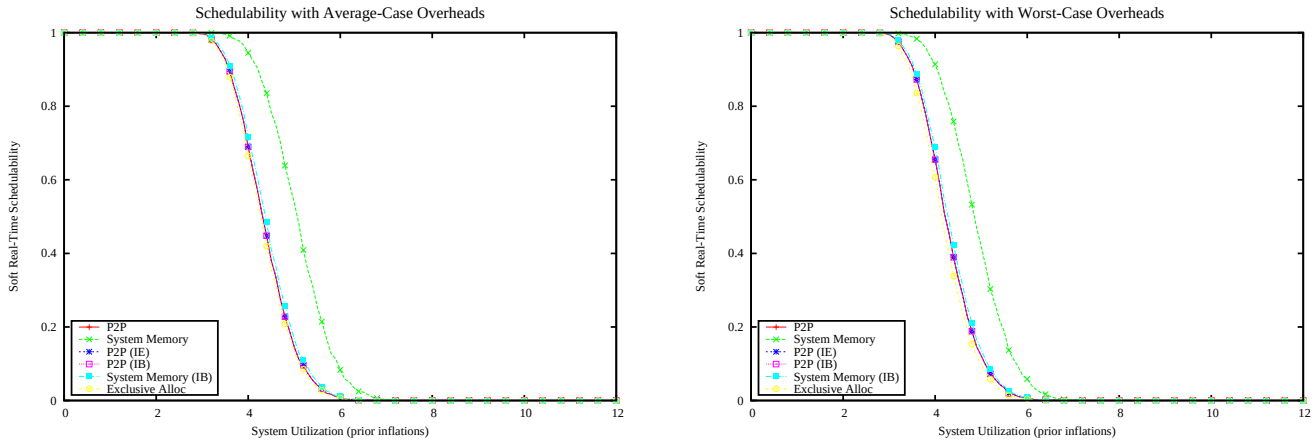

Figure 6083: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

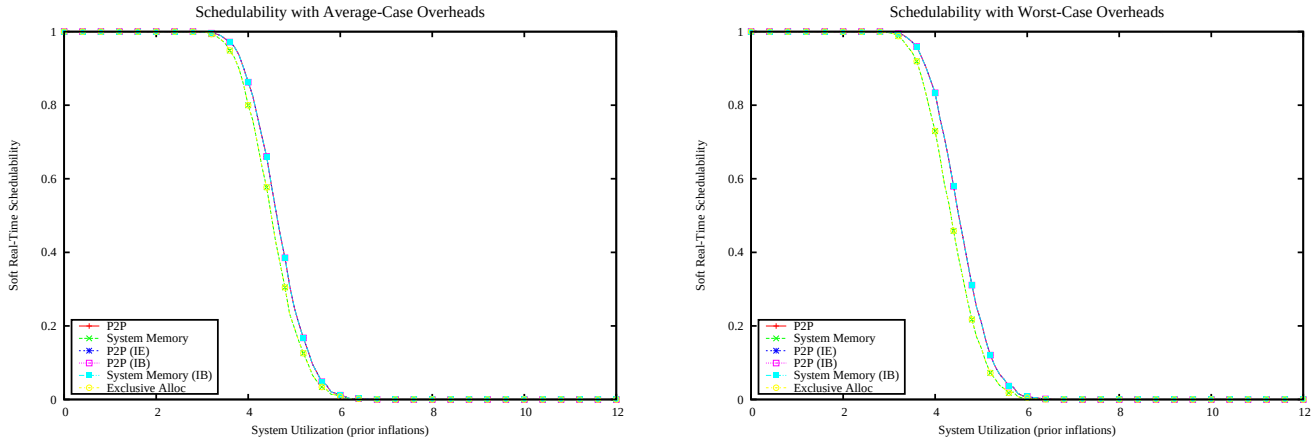

Figure 6084: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

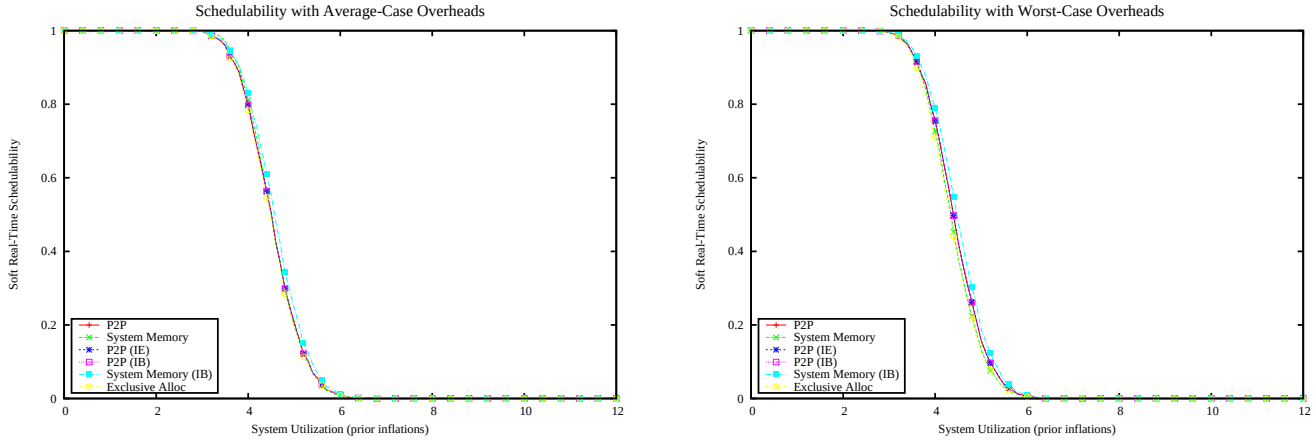

Figure 6085: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

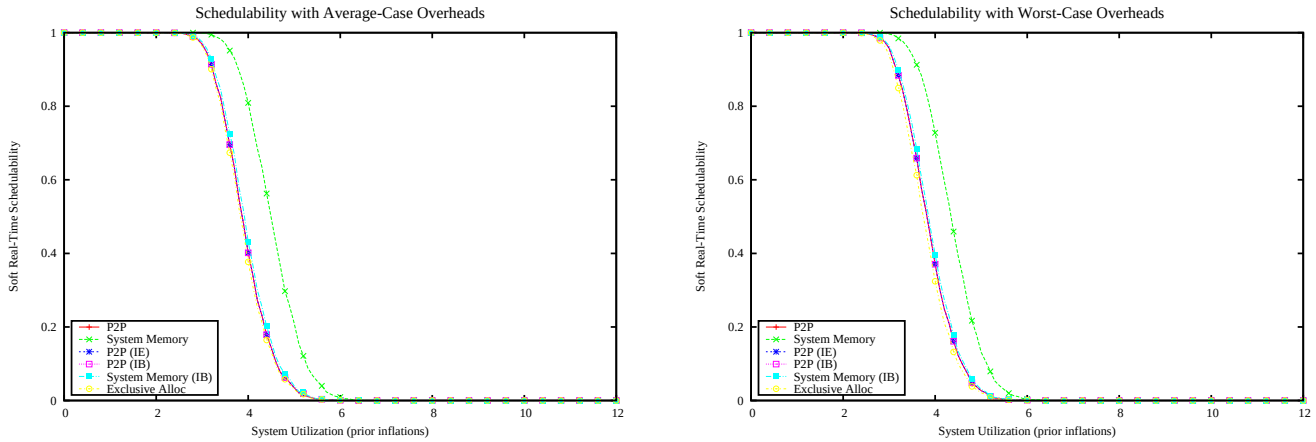

Figure 6086: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

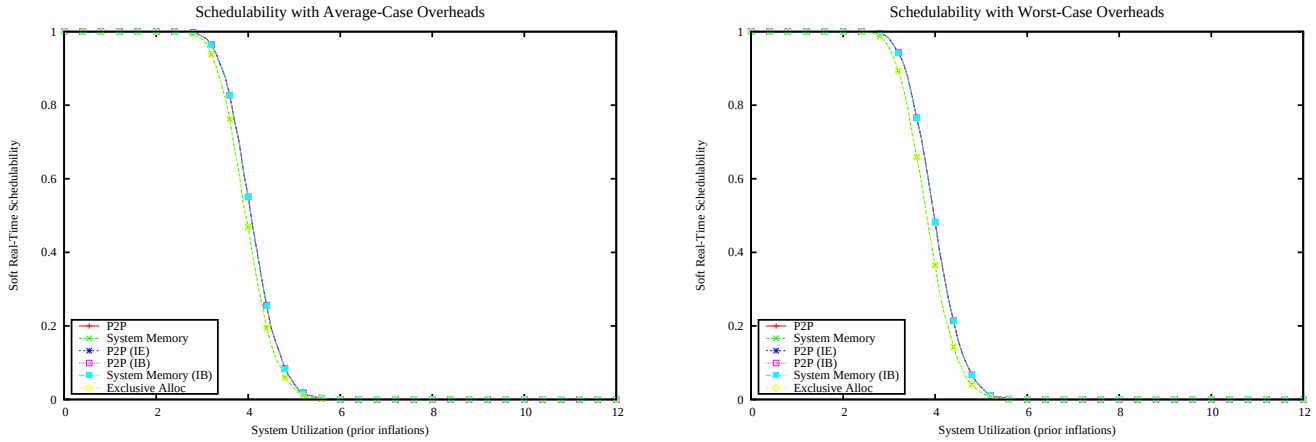

Figure 6087: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

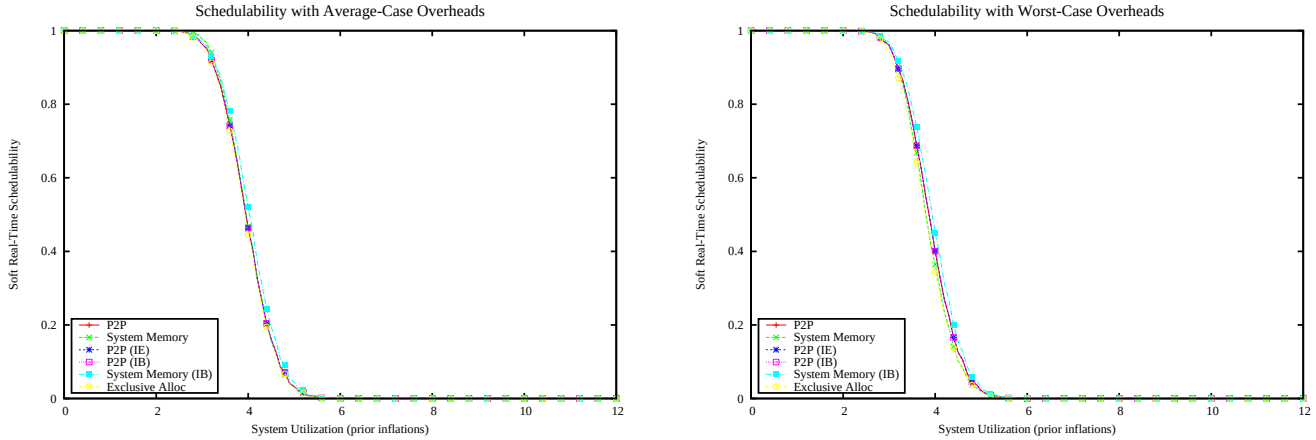

Figure 6088: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

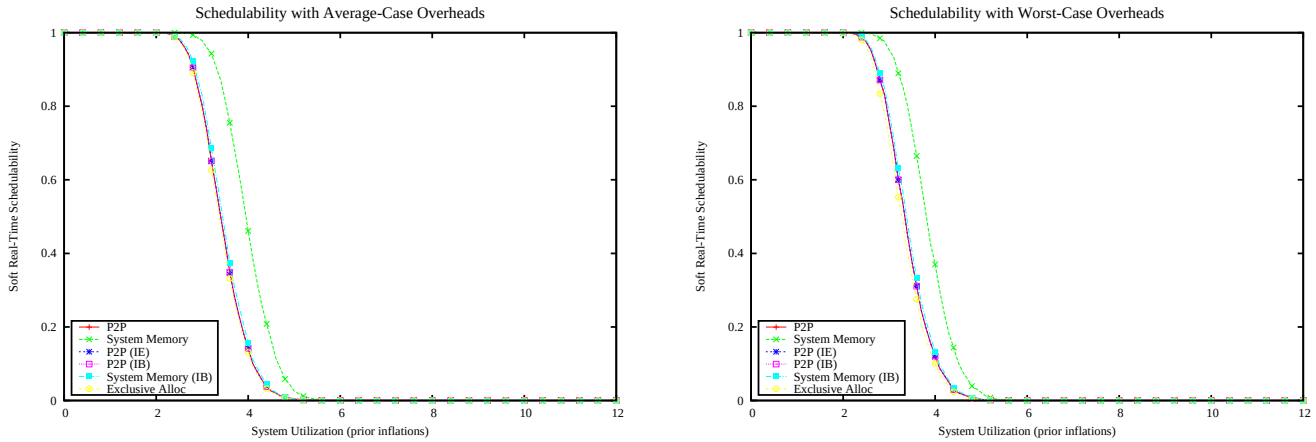

Figure 6089: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

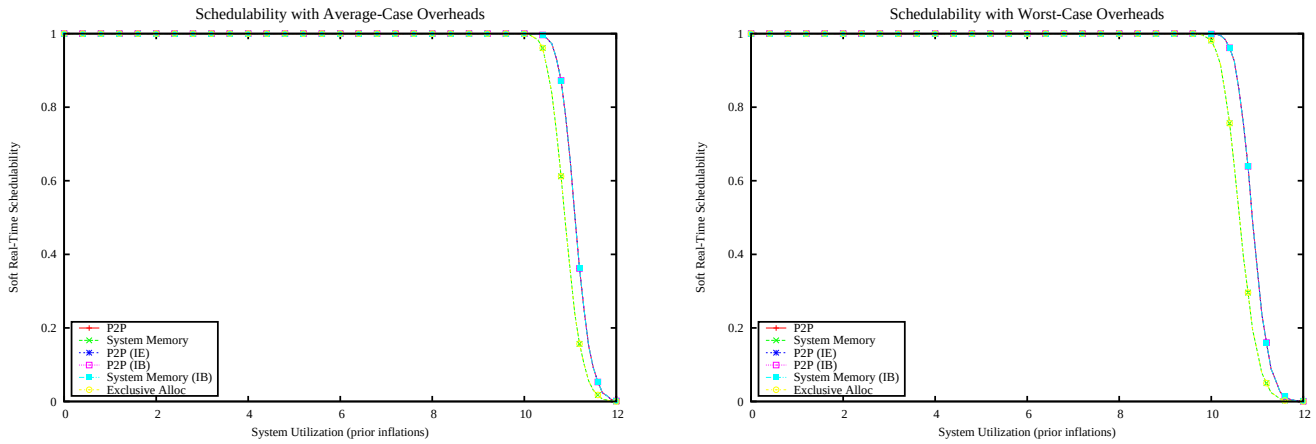

Figure 6090: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

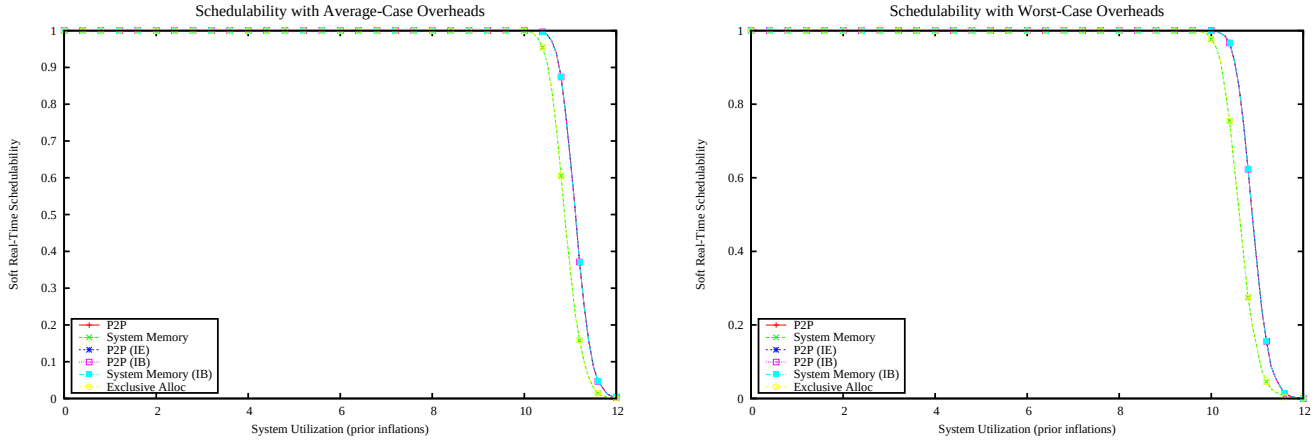

Figure 6091: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

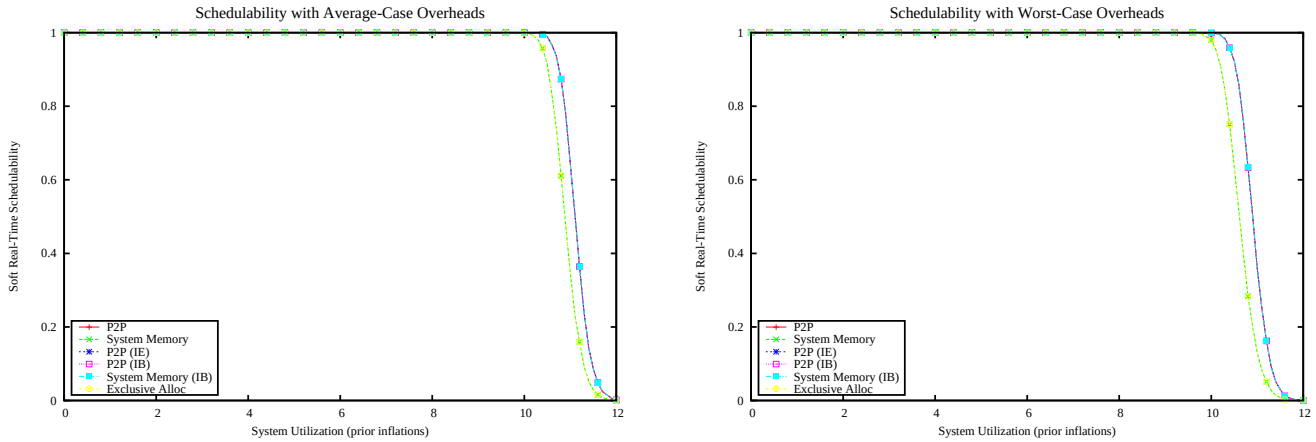

Figure 6092: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

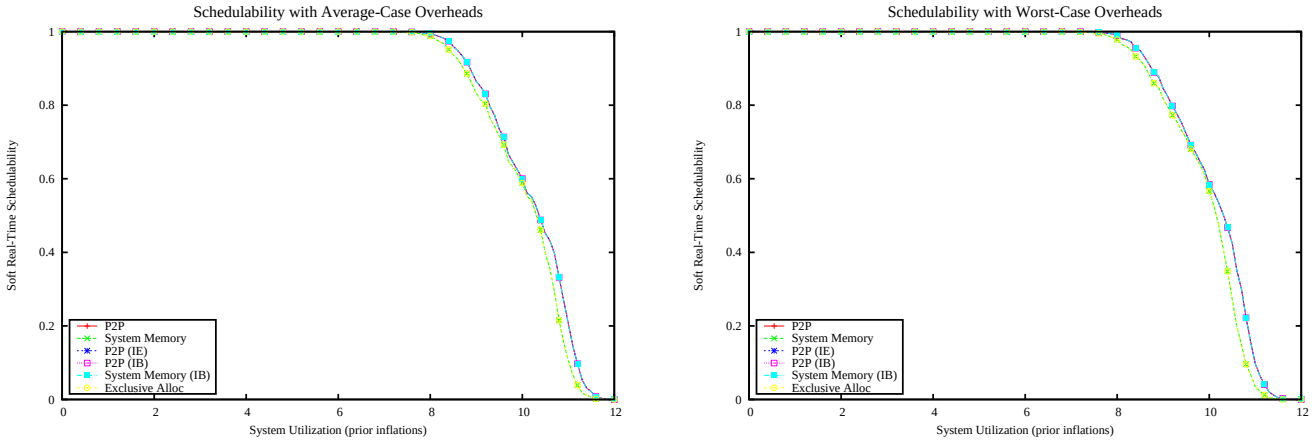

Figure 6093: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

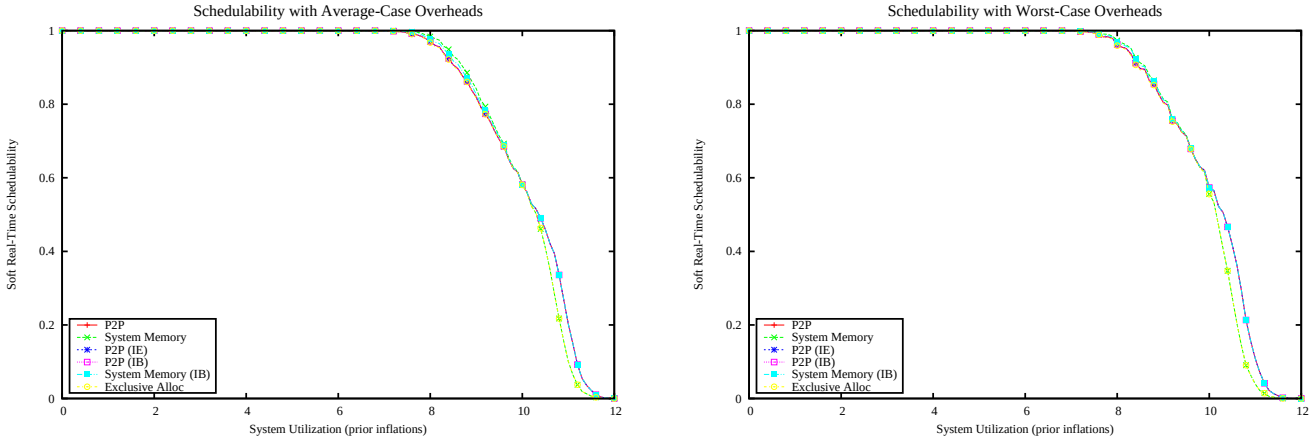

Figure 6094: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

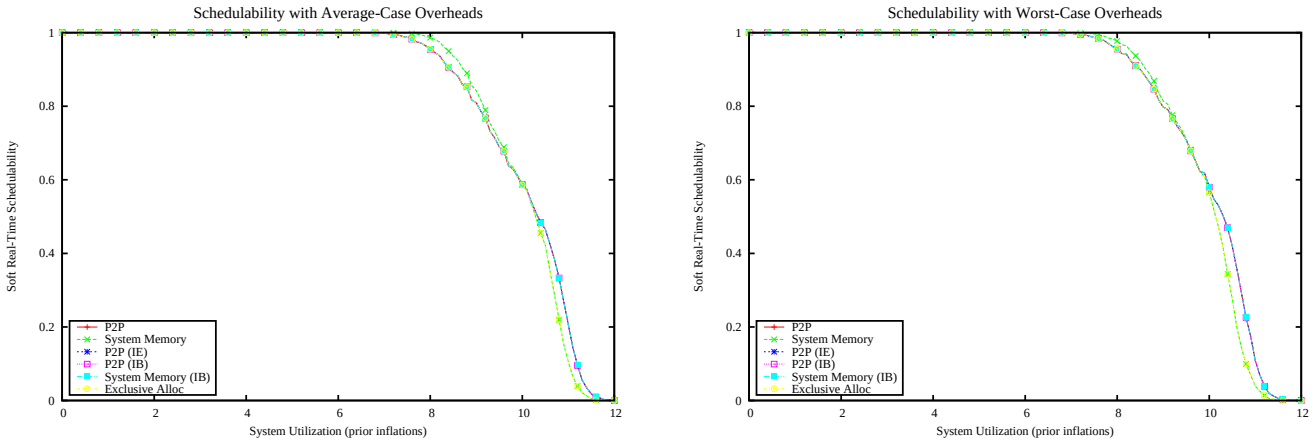

Figure 6095: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

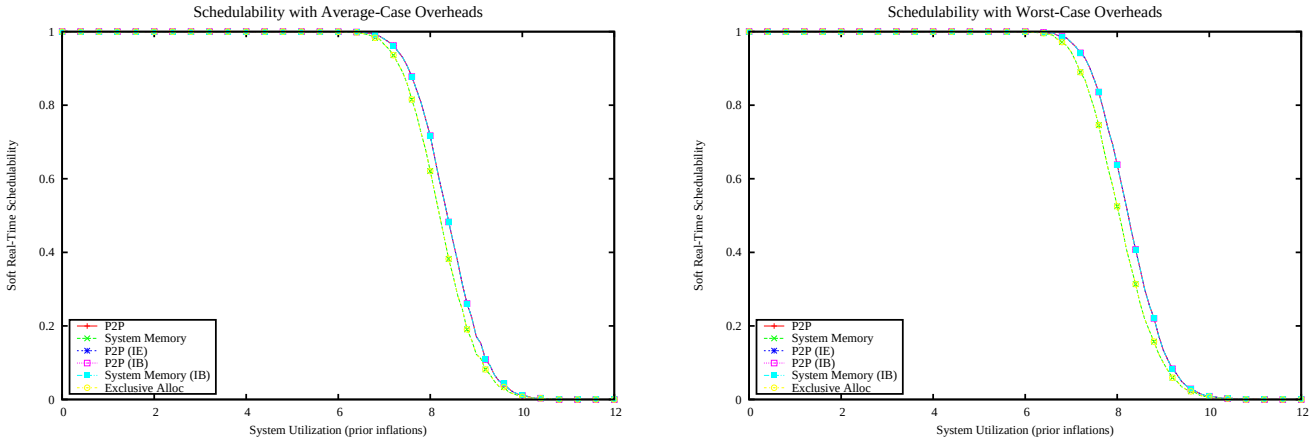

Figure 6096: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

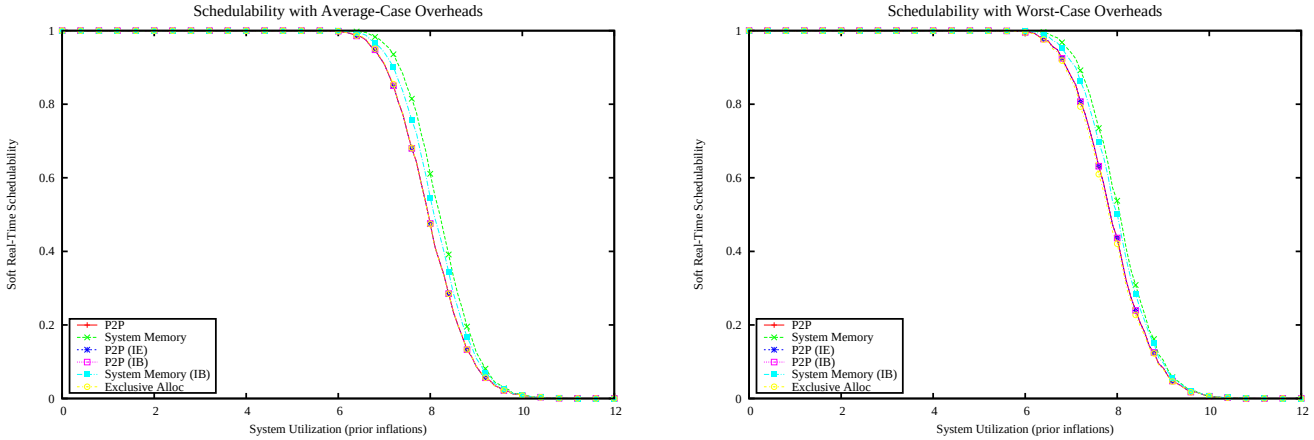

Figure 6097: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

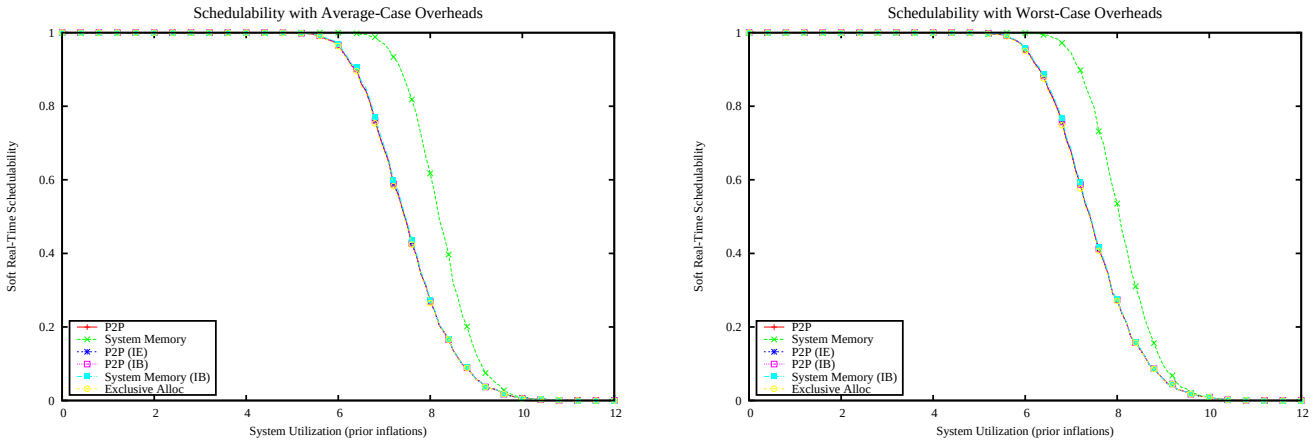

Figure 6098: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

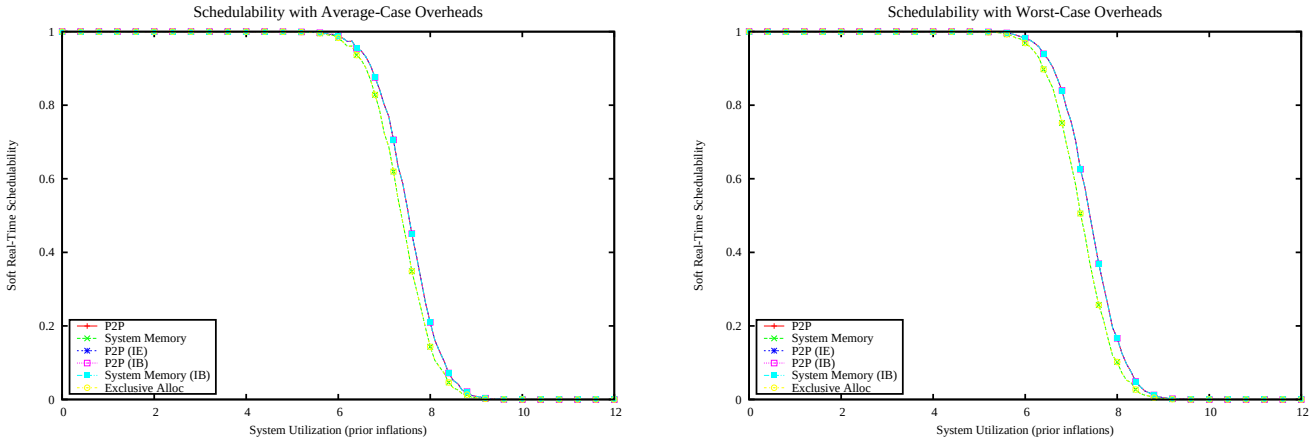

Figure 6099: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

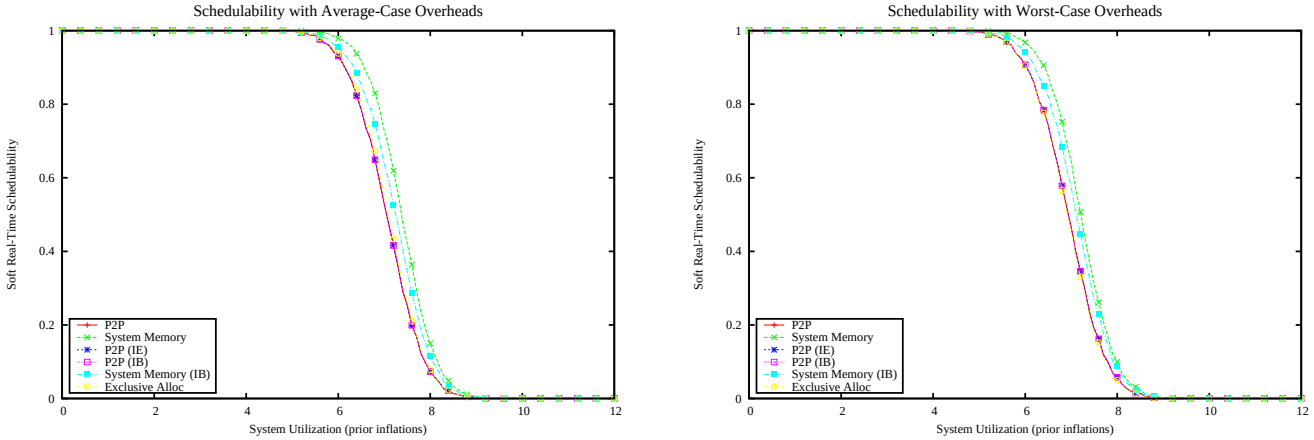

Figure 6100: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

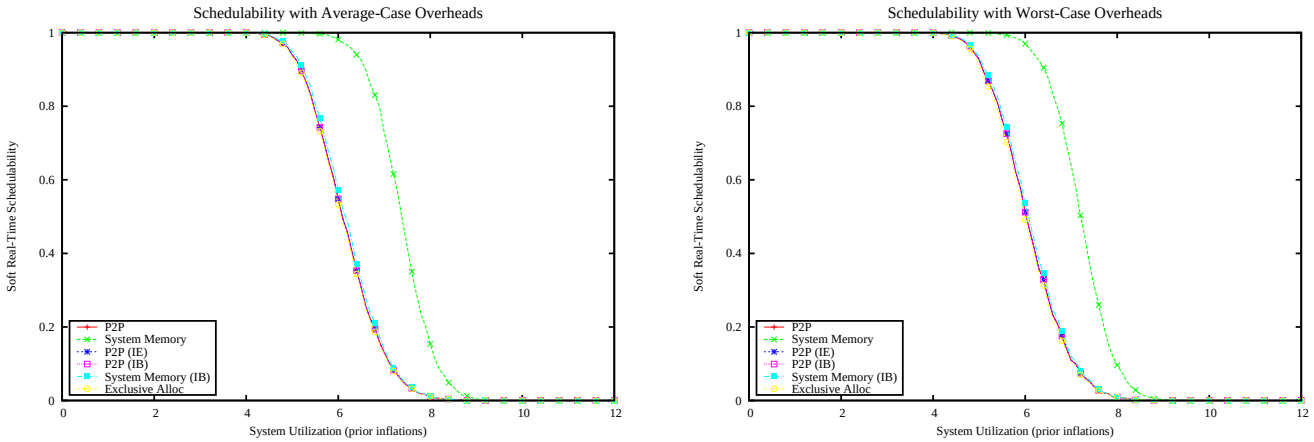

Figure 6101: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

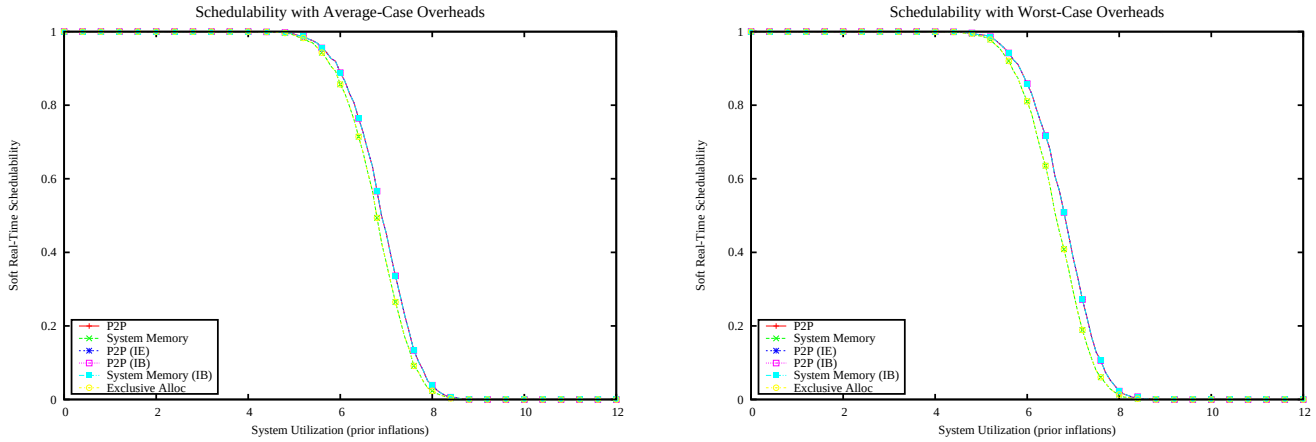

Figure 6102: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

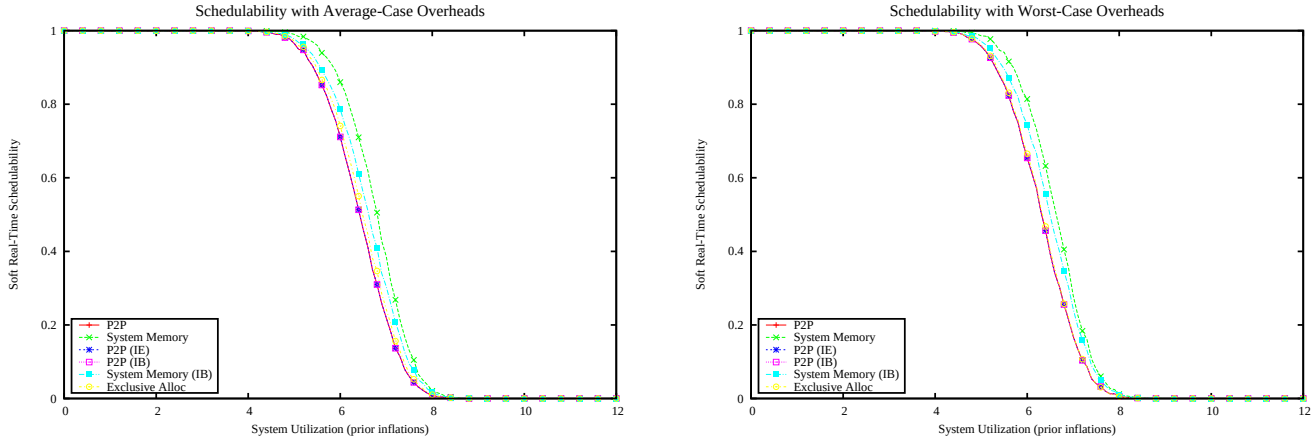

Figure 6103: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

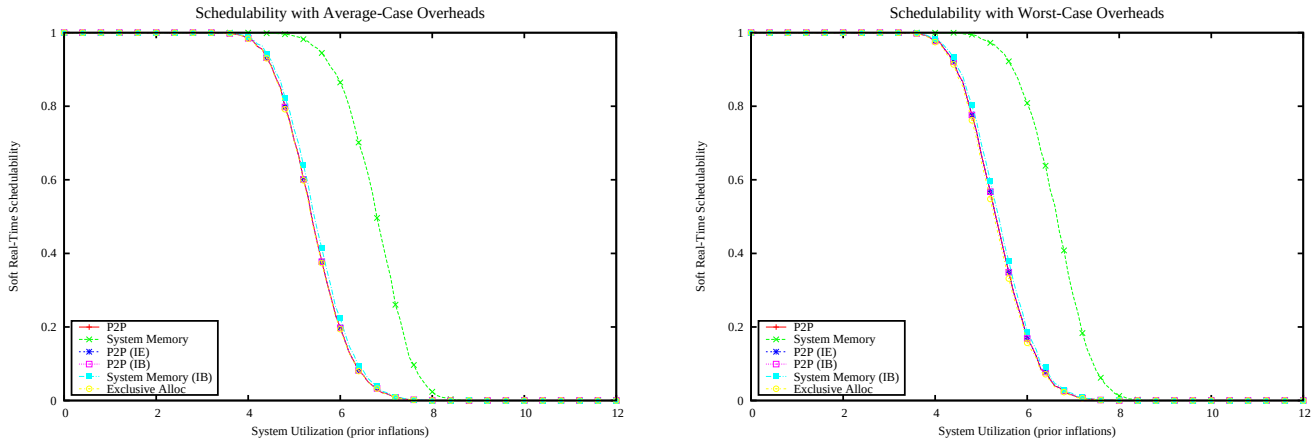

Figure 6104: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

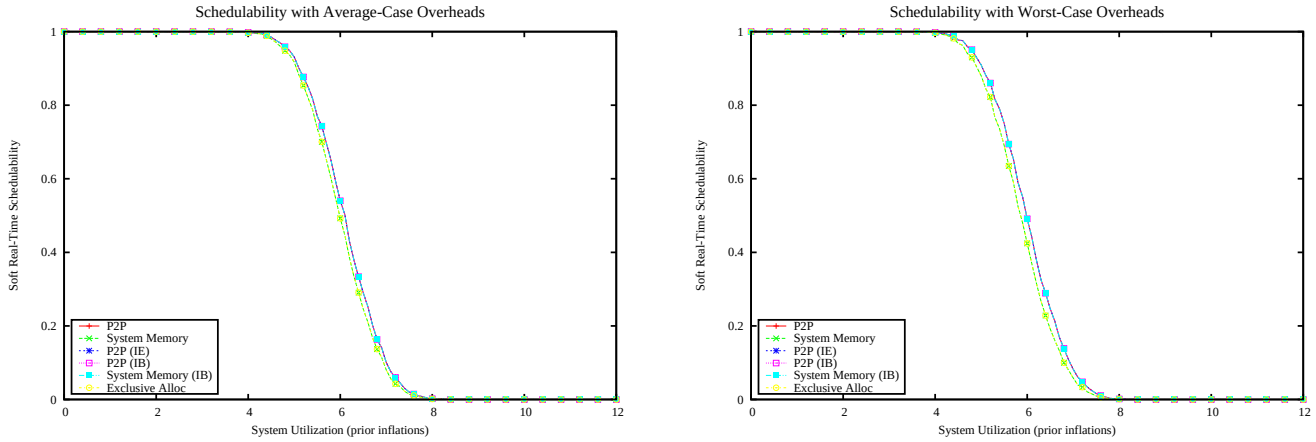

Figure 6105: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

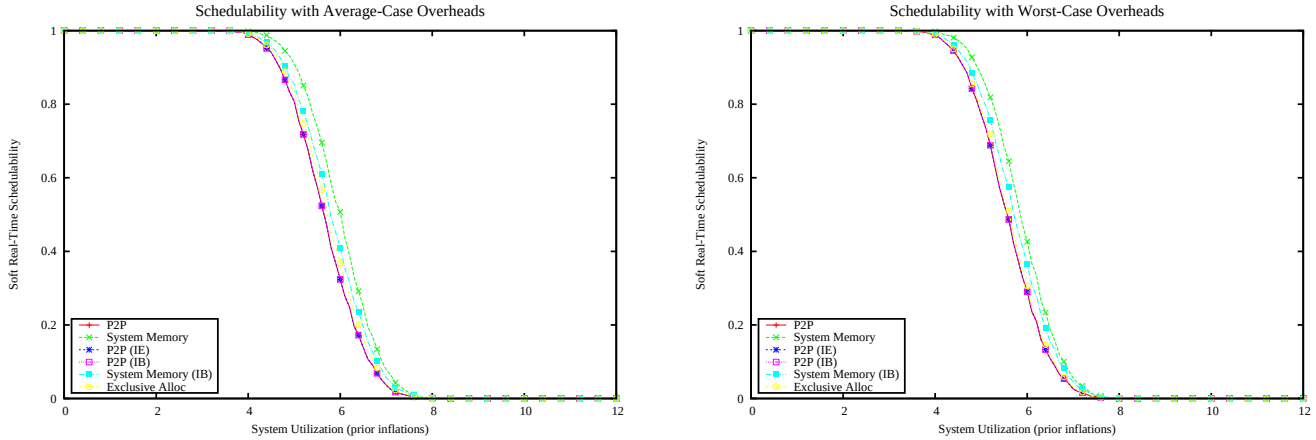

Figure 6106: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

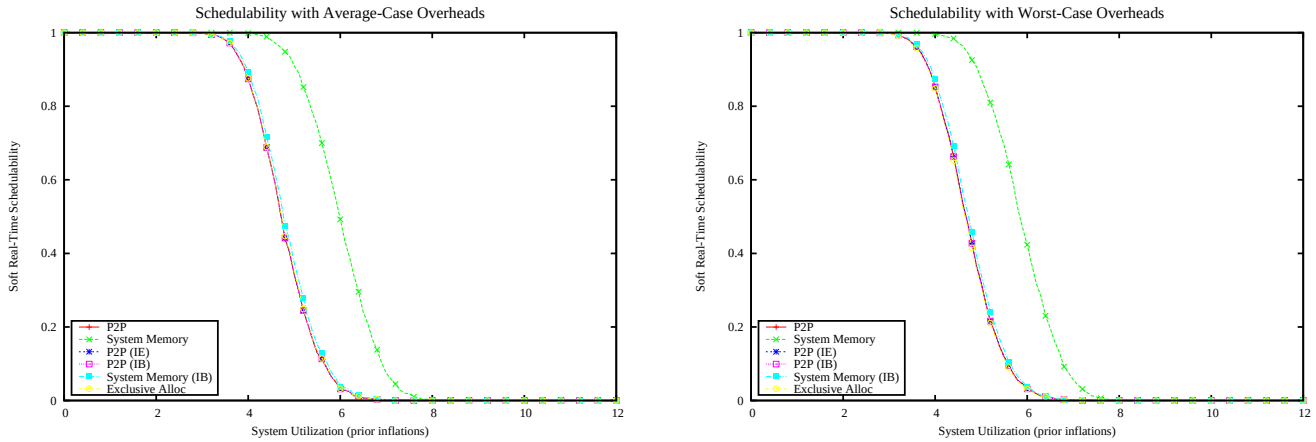

Figure 6107: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

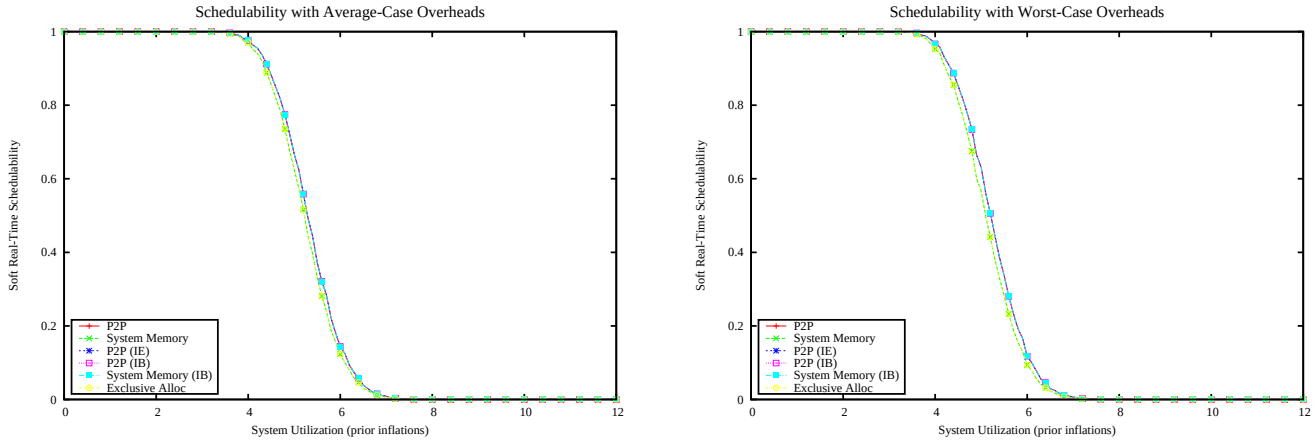

Figure 6108: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

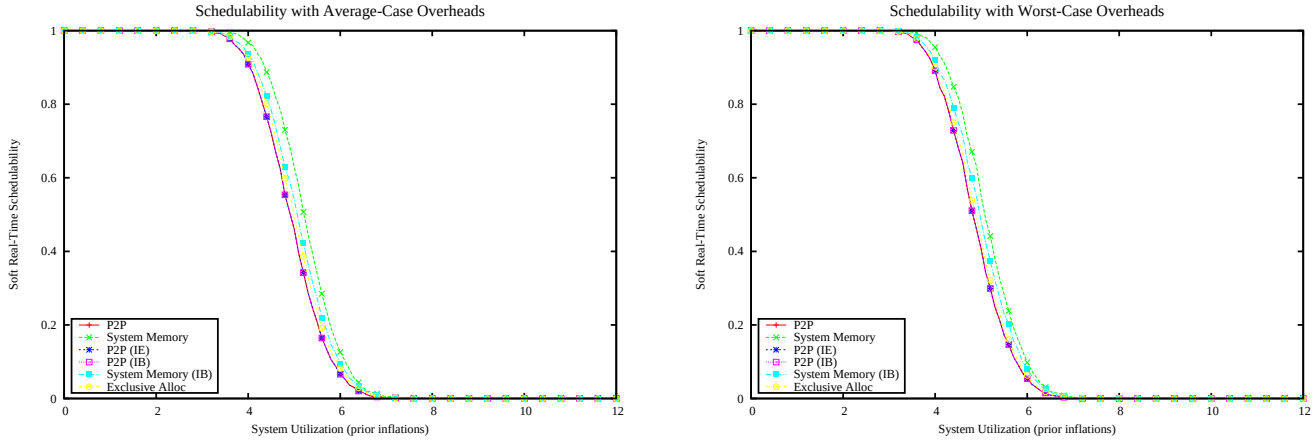

Figure 6109: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

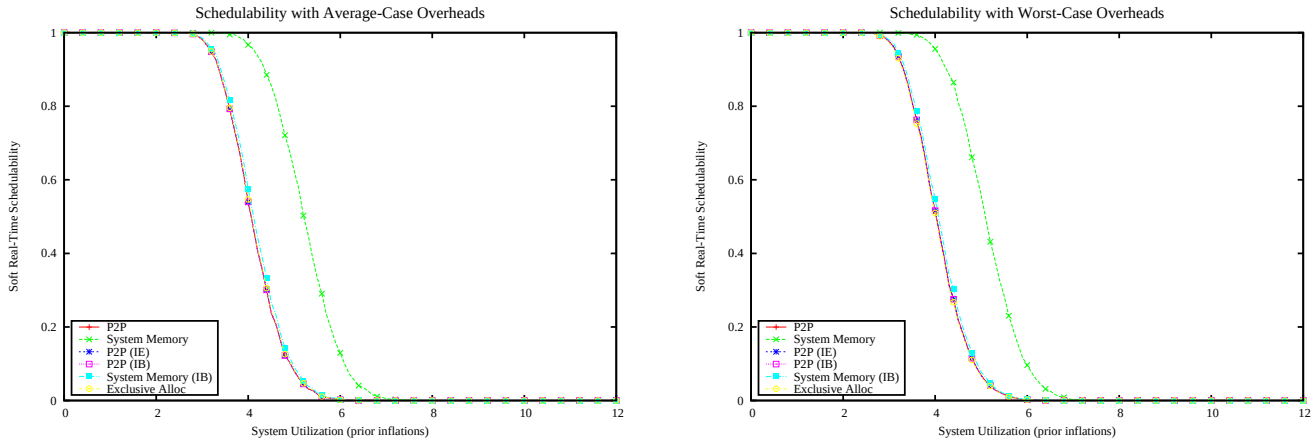

Figure 6110: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

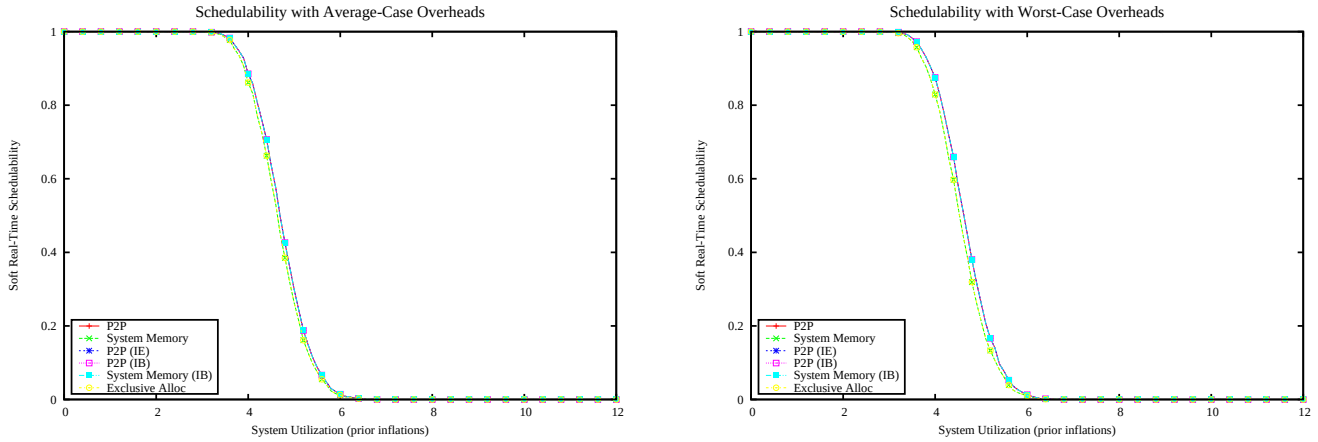

Figure 6111: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

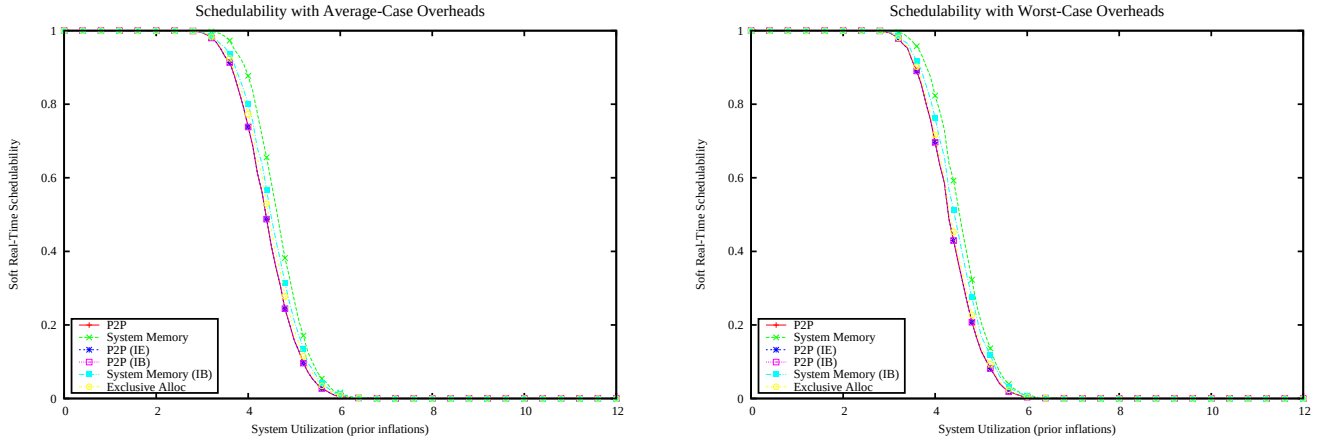

Figure 6112: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

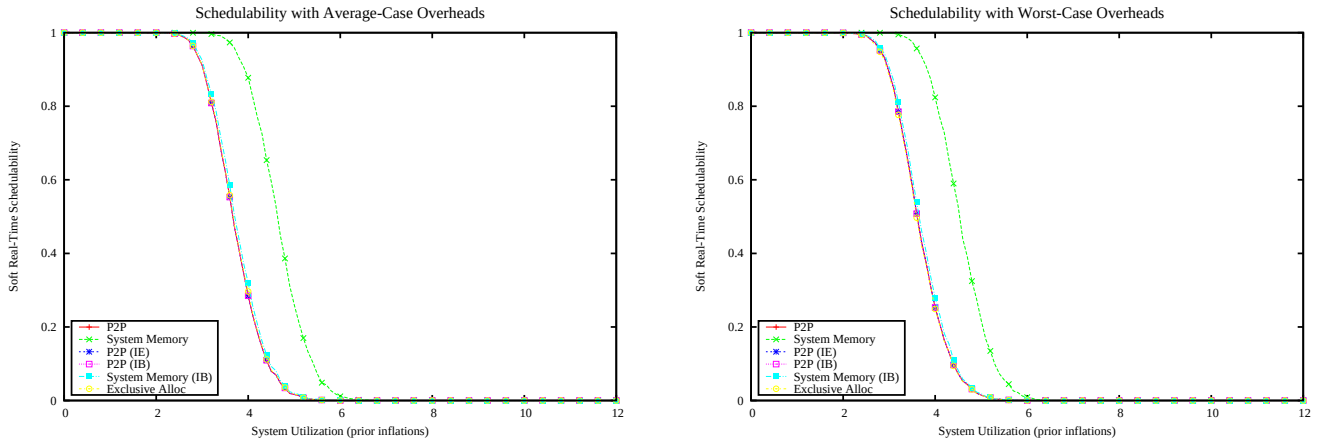

Figure 6113: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

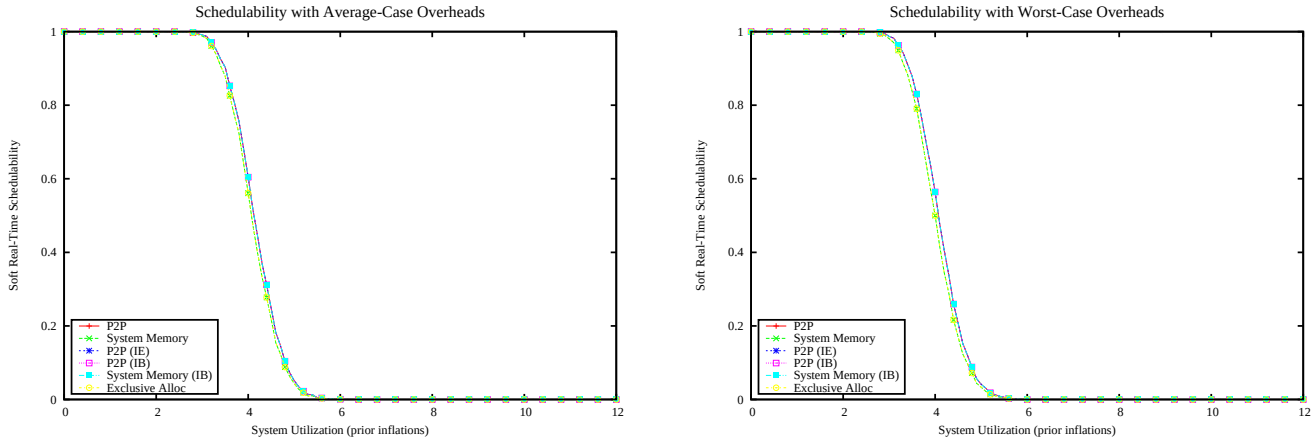

Figure 6114: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

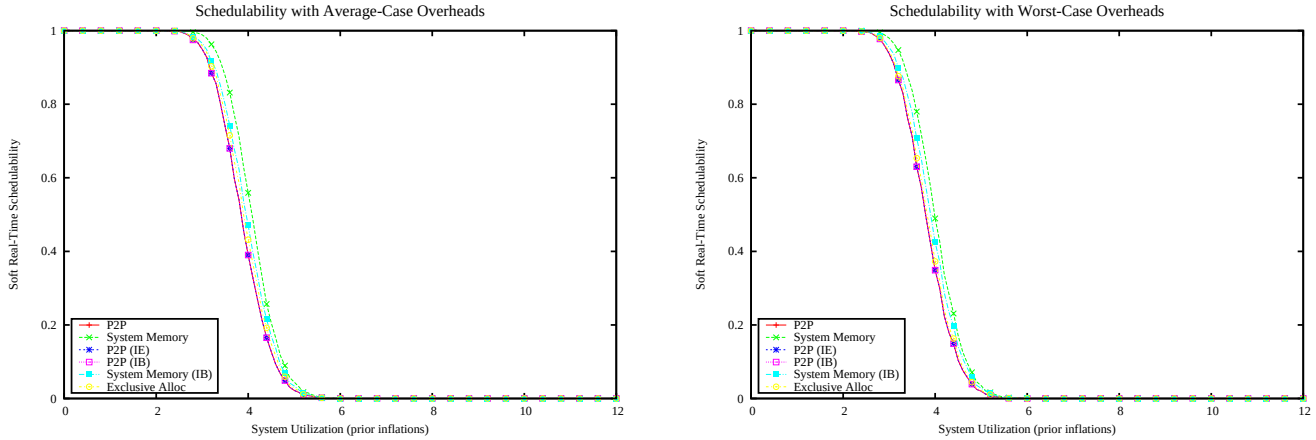

Figure 6115: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

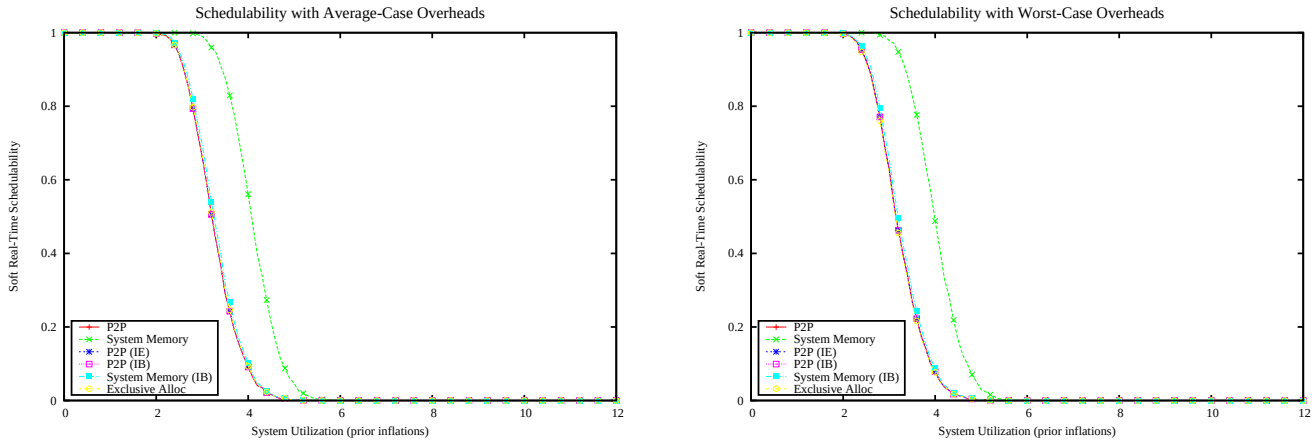

Figure 6116: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

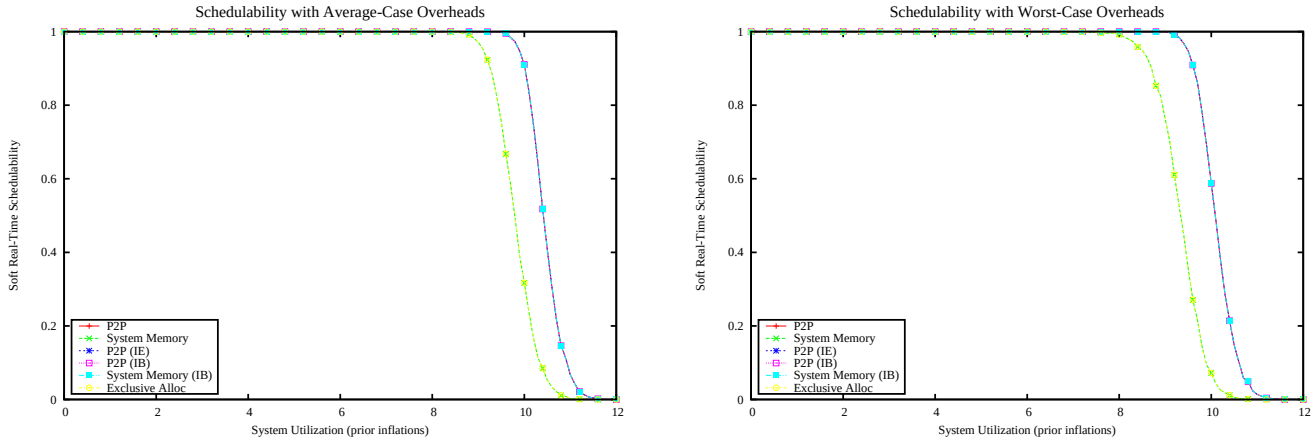

Figure 6117: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

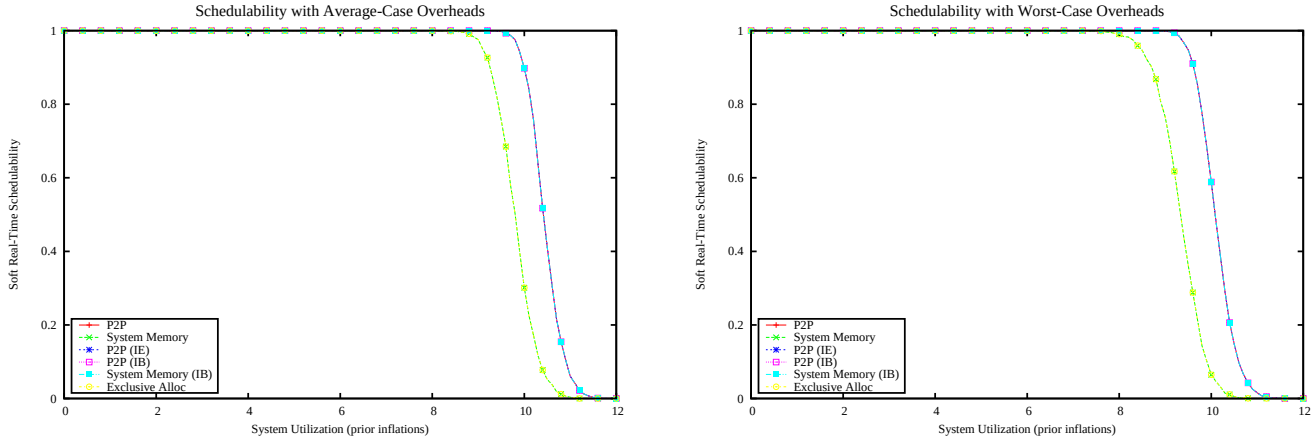

Figure 6118: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

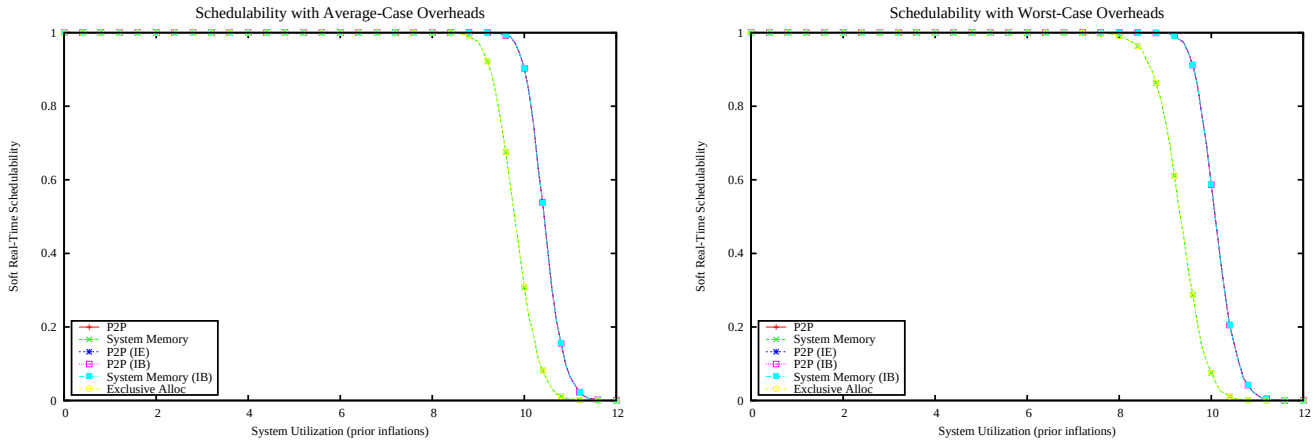

Figure 6119: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

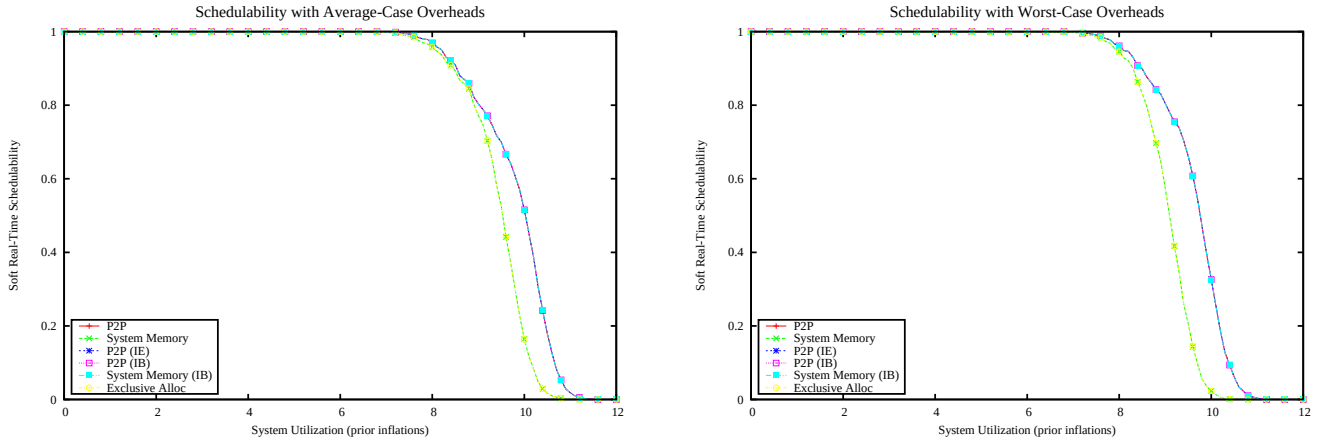

Figure 6120: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

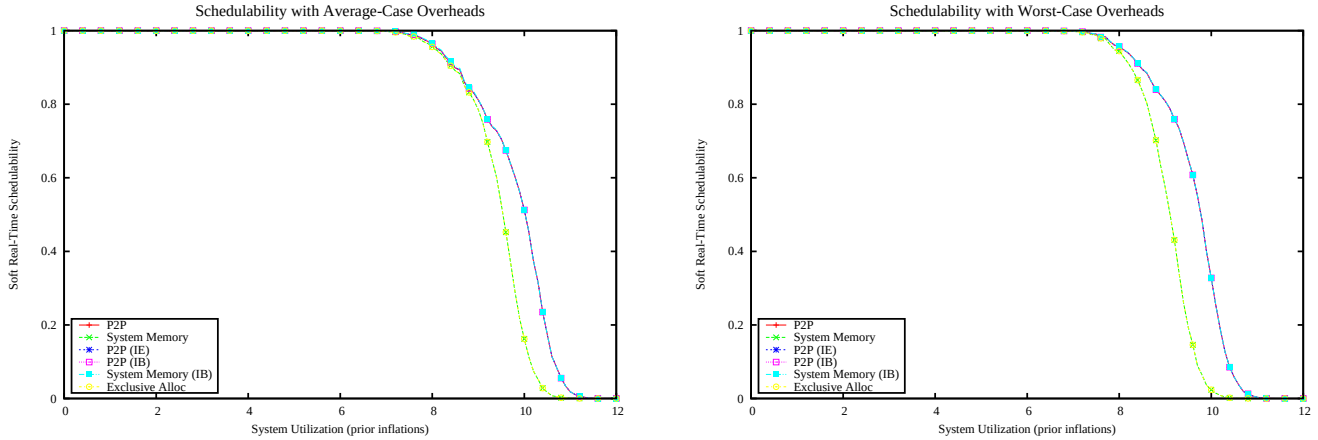

Figure 6121: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

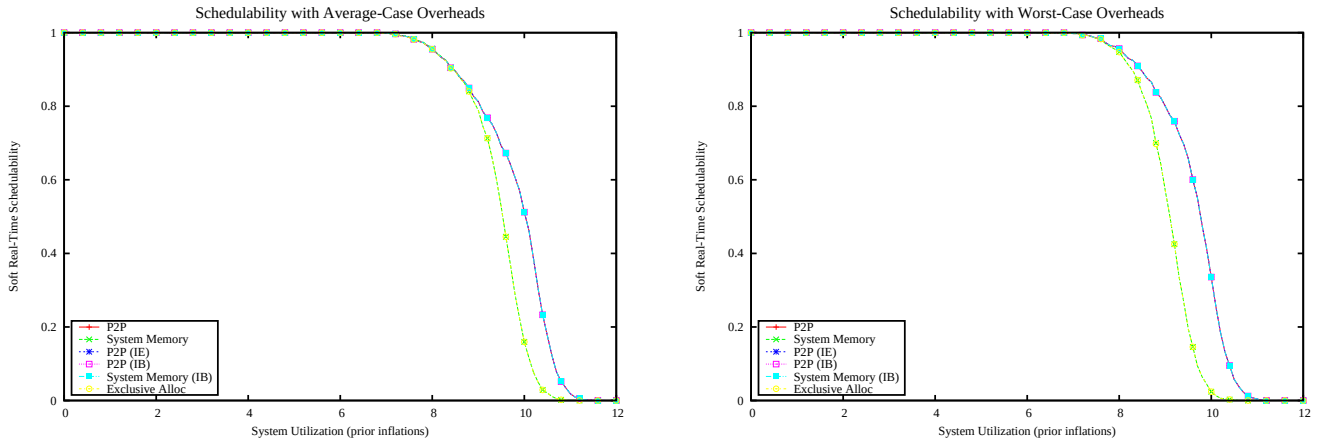

Figure 6122: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

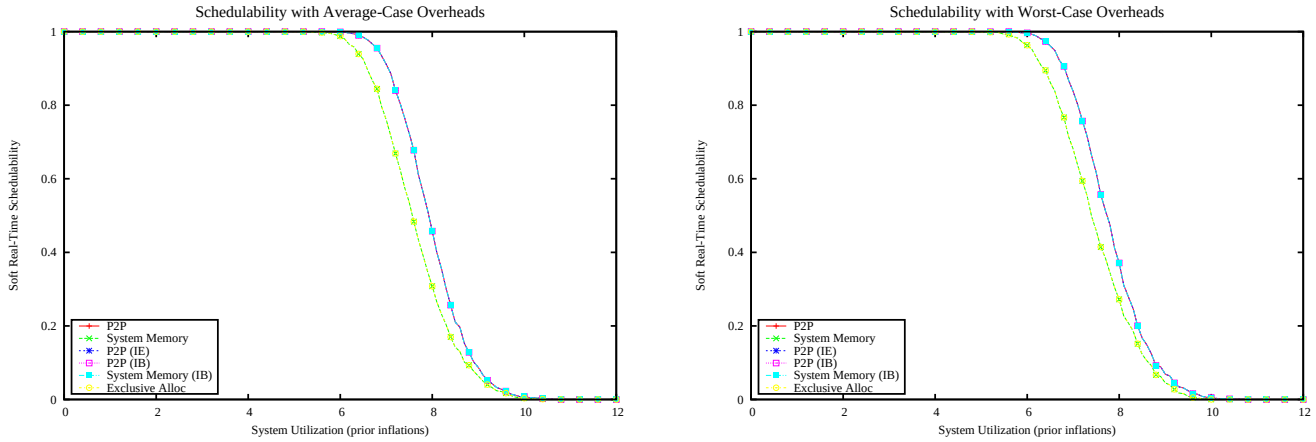

Figure 6123: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

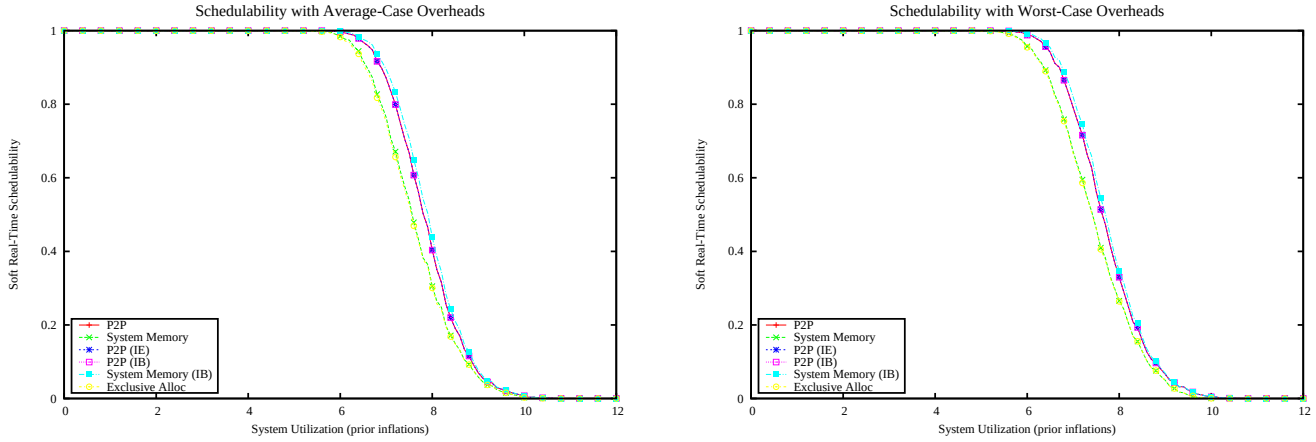

Figure 6124: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

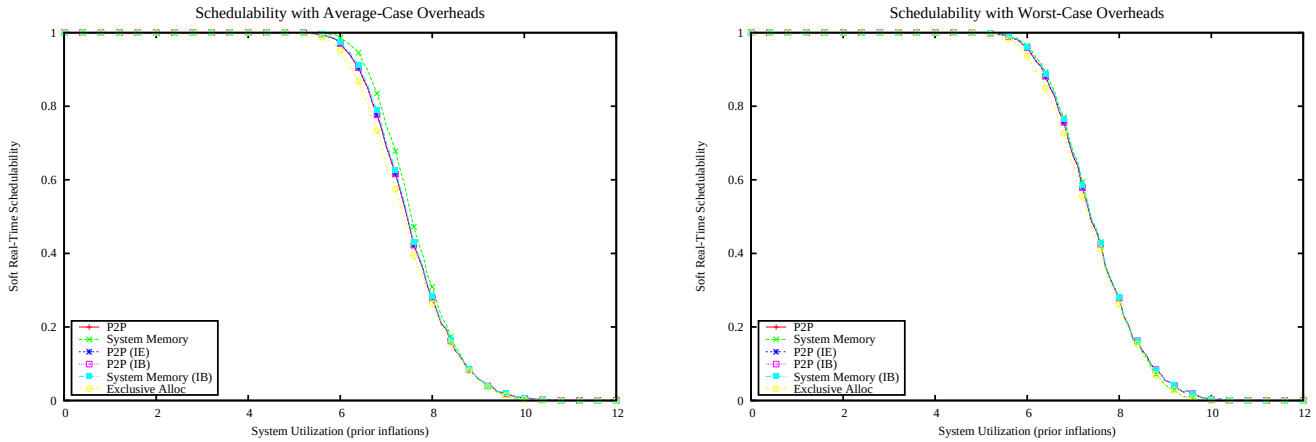

Figure 6125: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

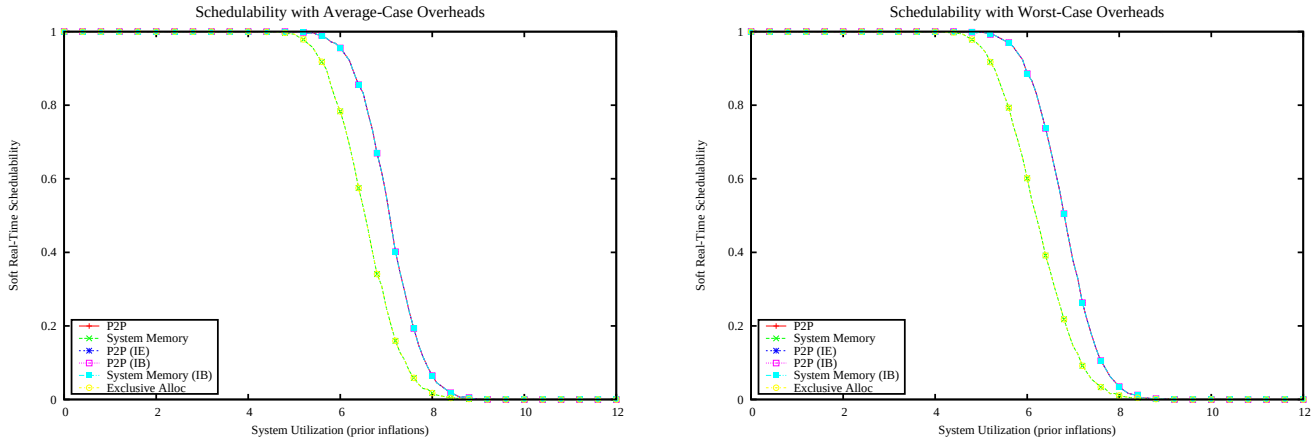

Figure 6126: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

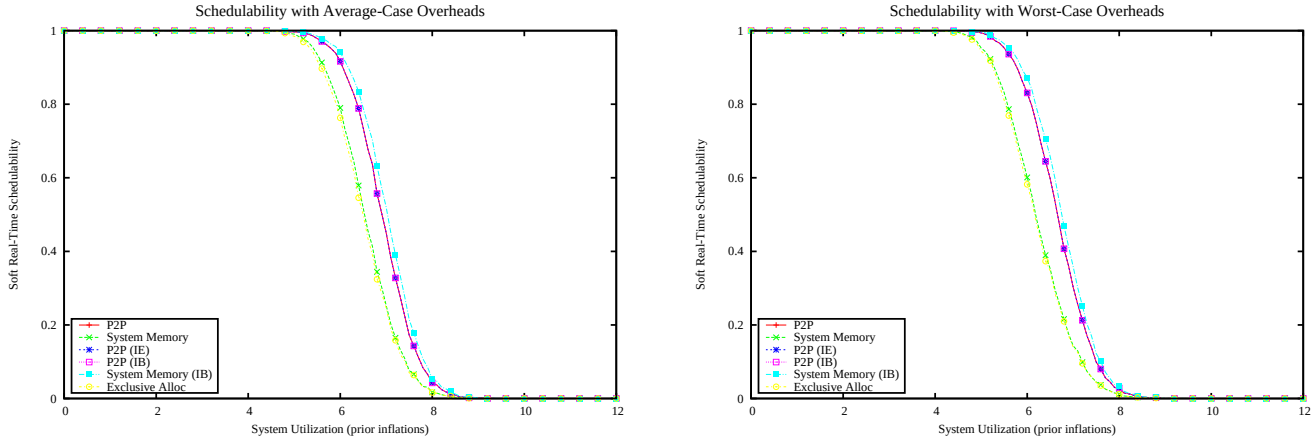

Figure 6127: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

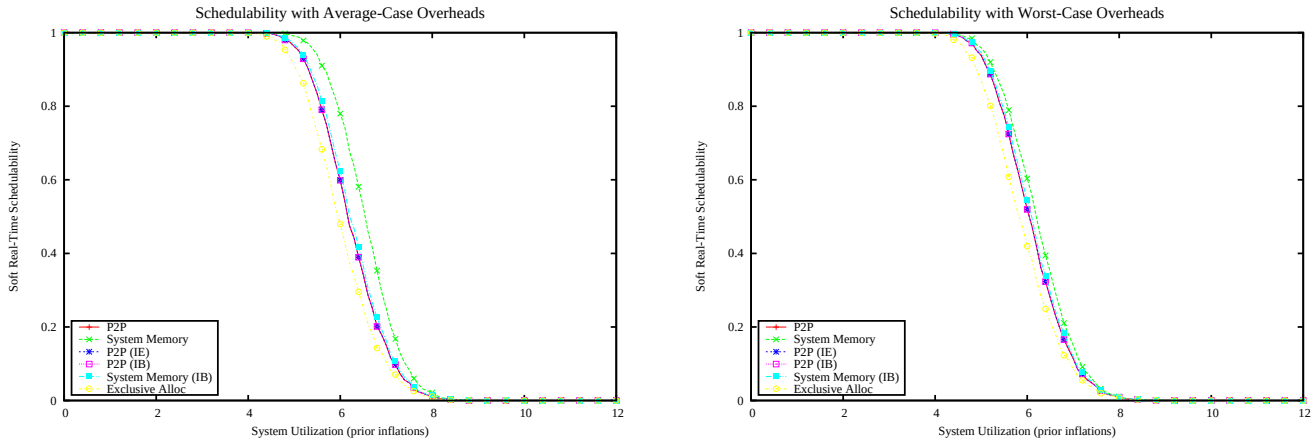

Figure 6128: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

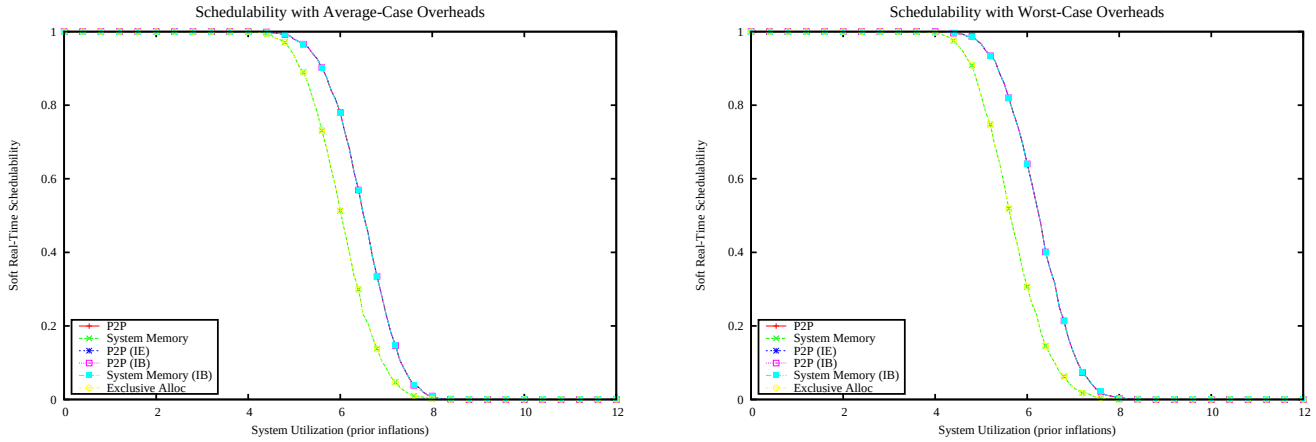

Figure 6129: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

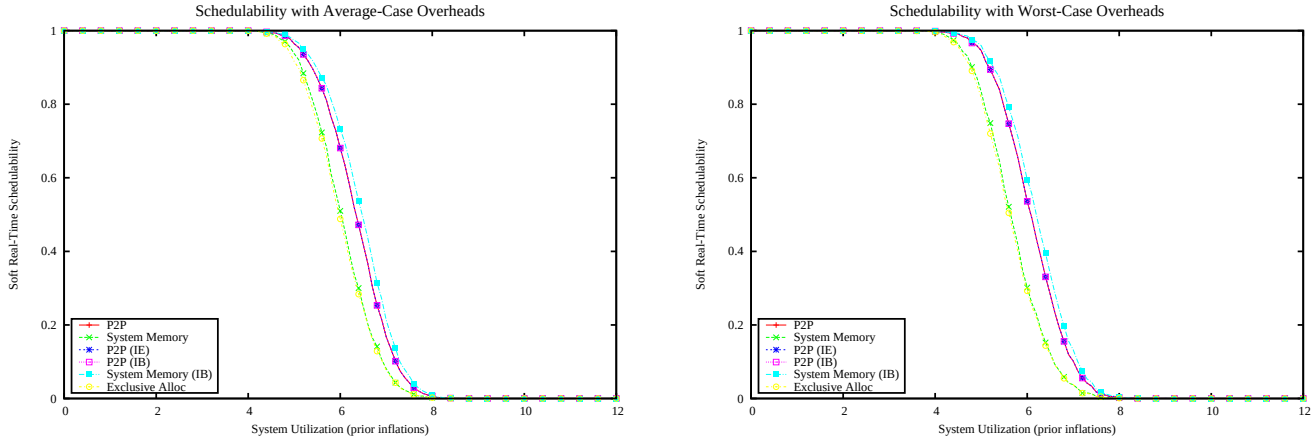

Figure 6130: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

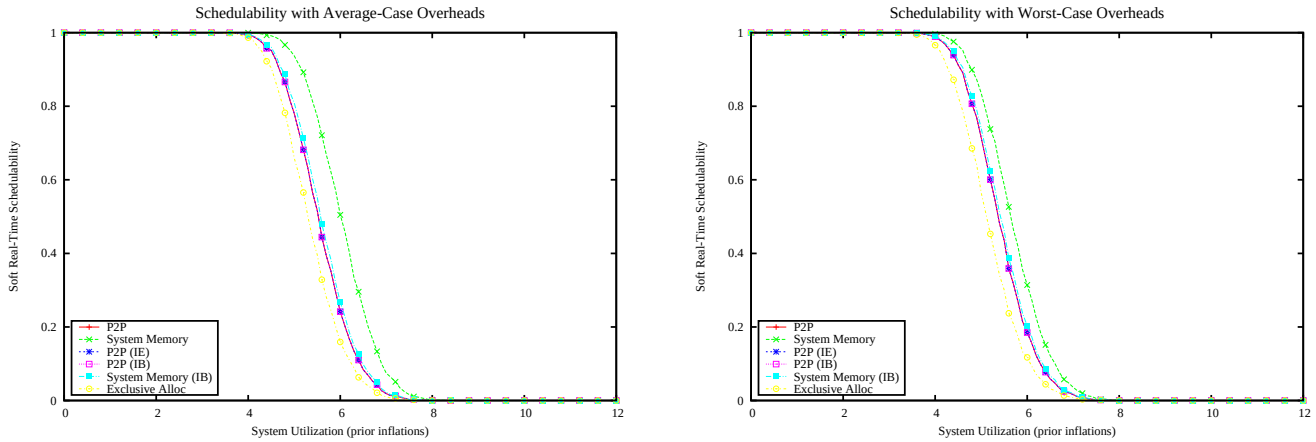

Figure 6131: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

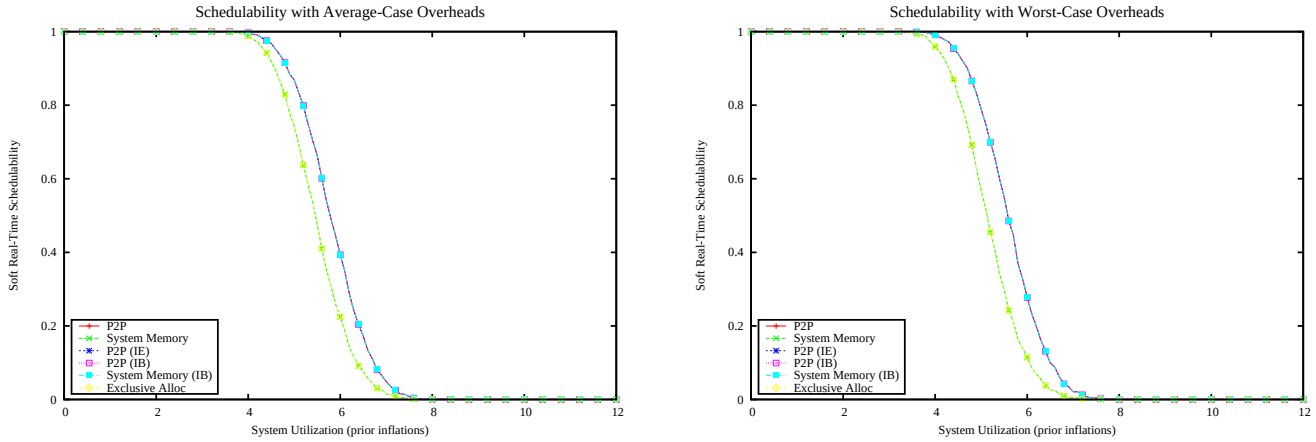

Figure 6132: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

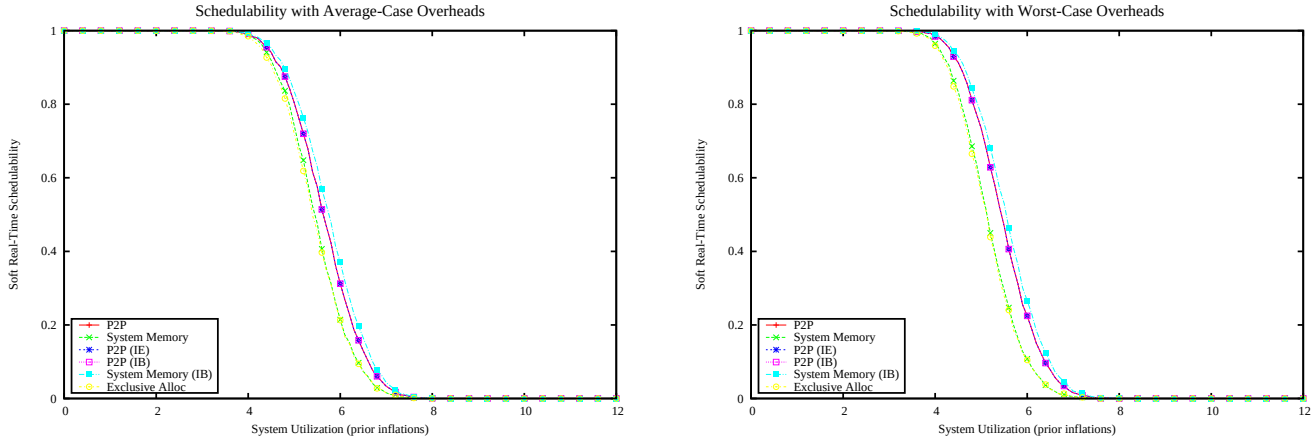

Figure 6133: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

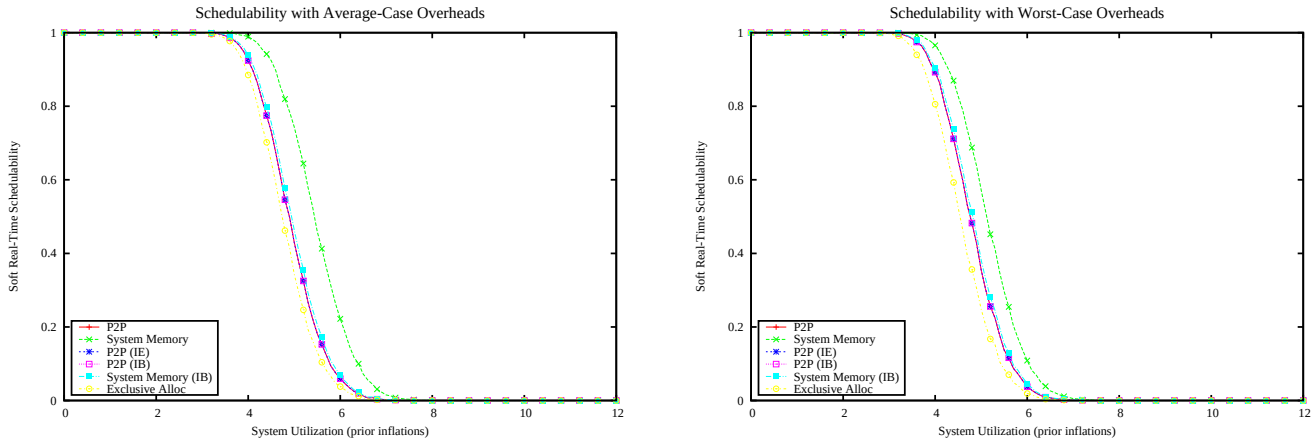

Figure 6134: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

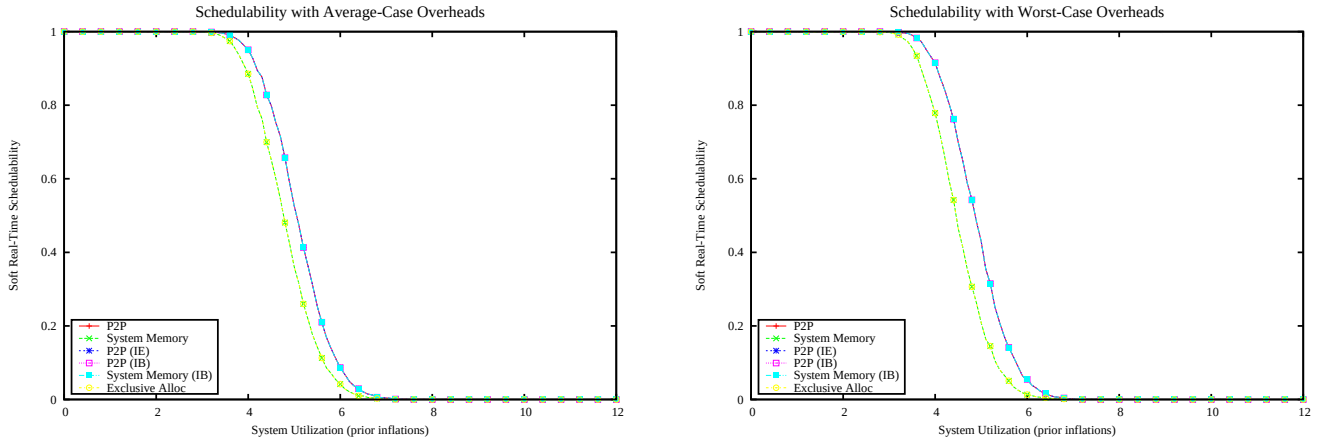

Figure 6135: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

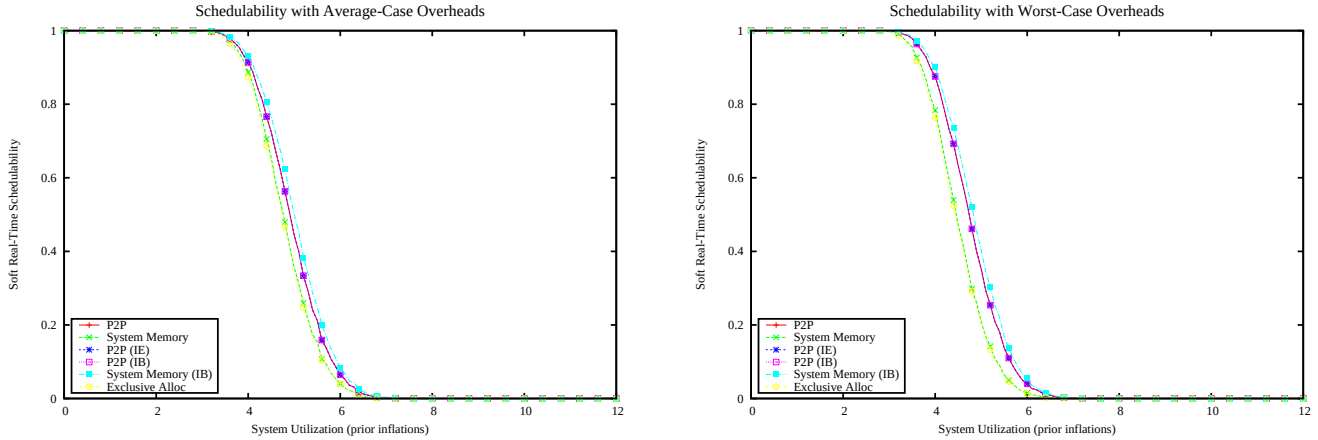

Figure 6136: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

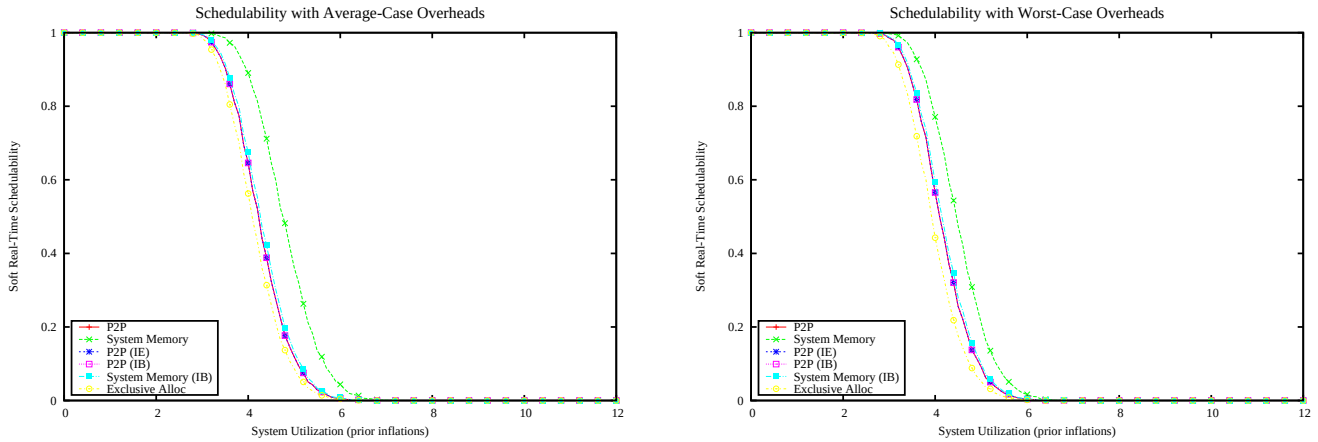

Figure 6137: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

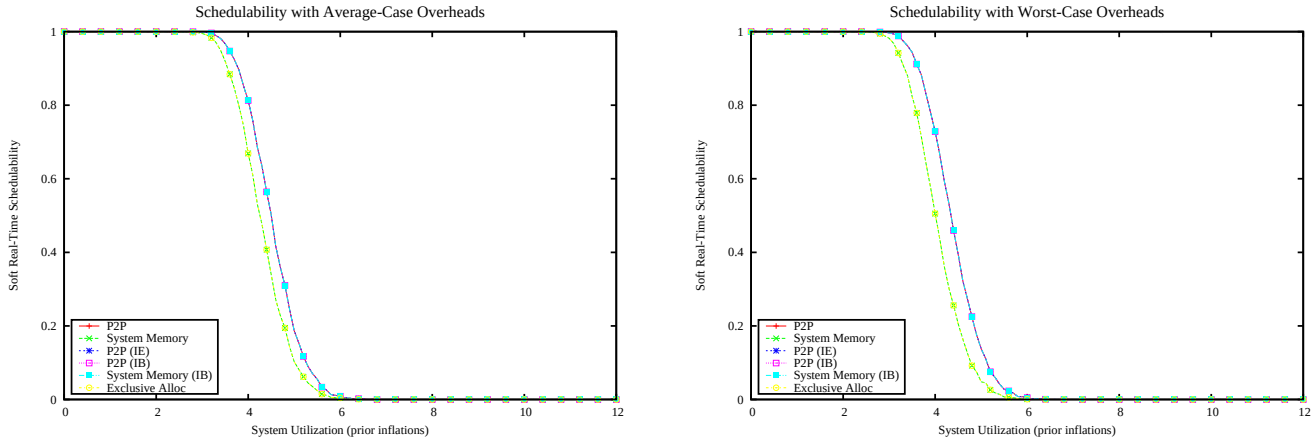

Figure 6138: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

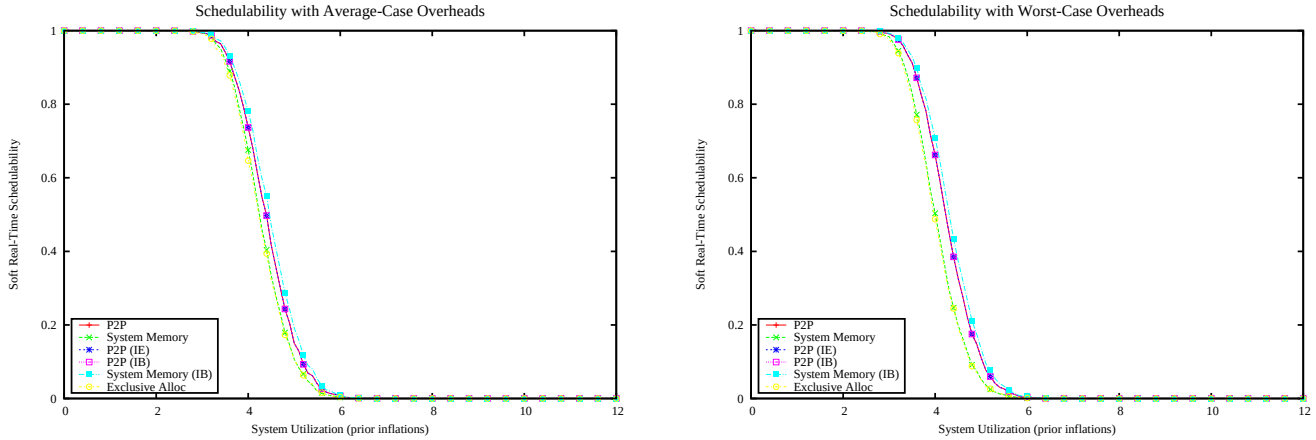

Figure 6139: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

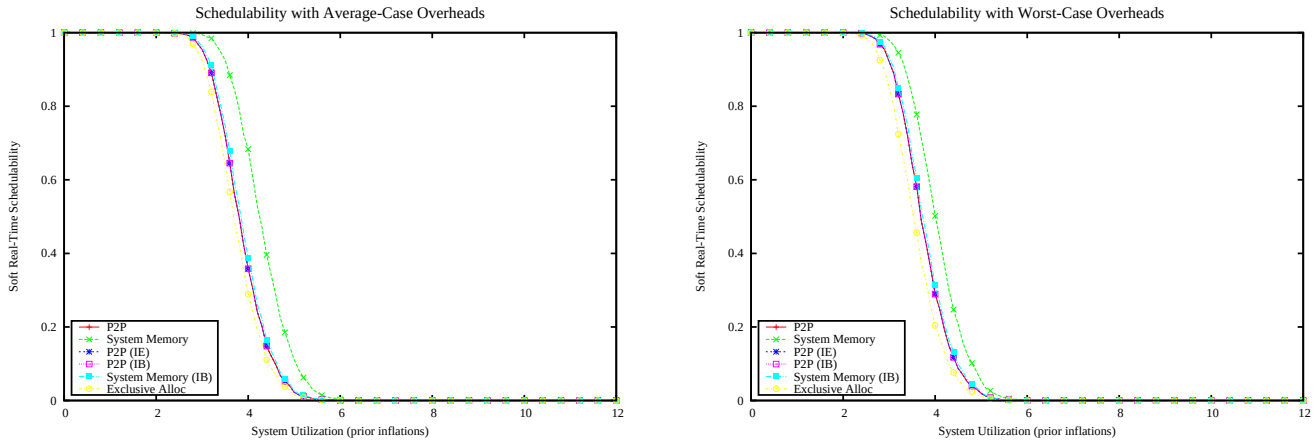

Figure 6140: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

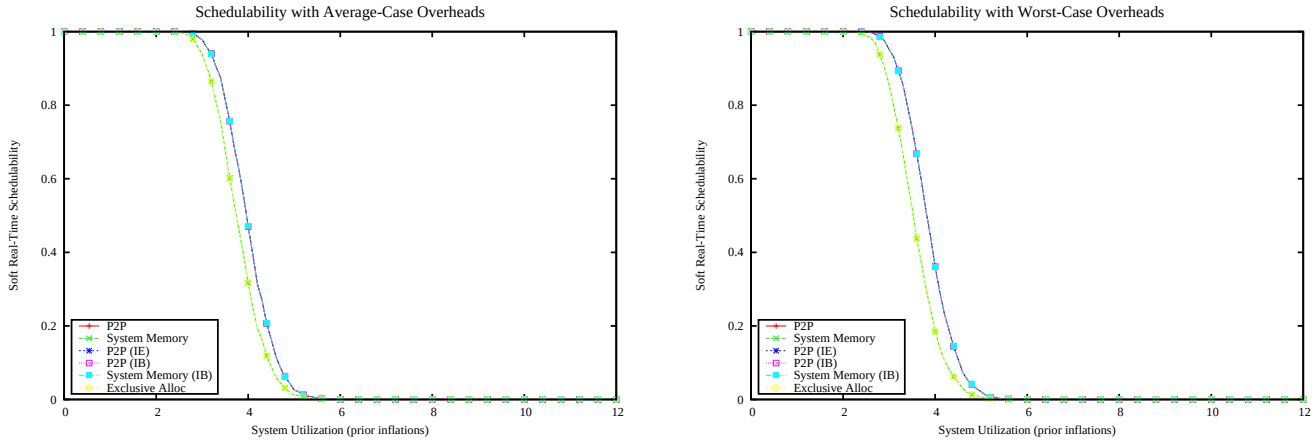

Figure 6141: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

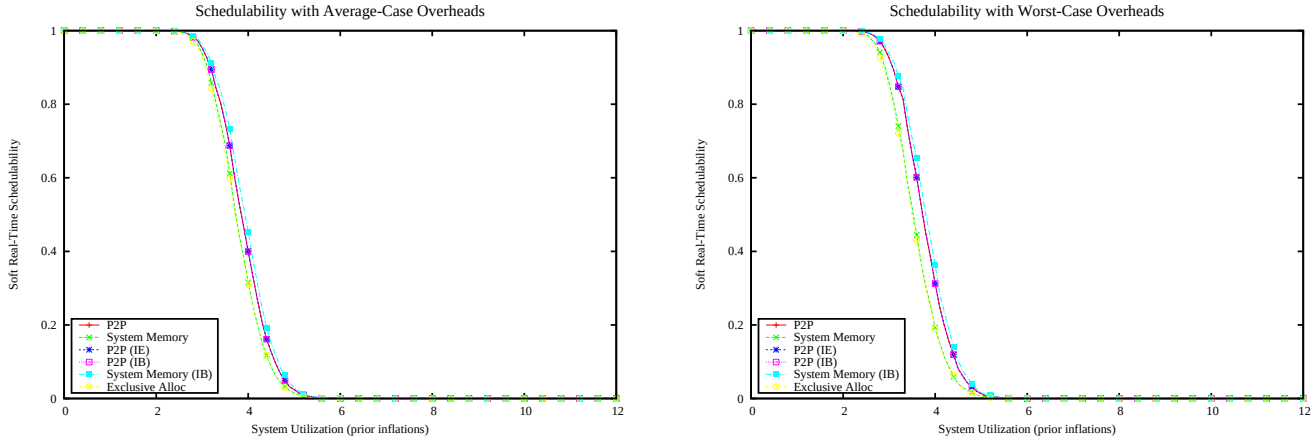

Figure 6142: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

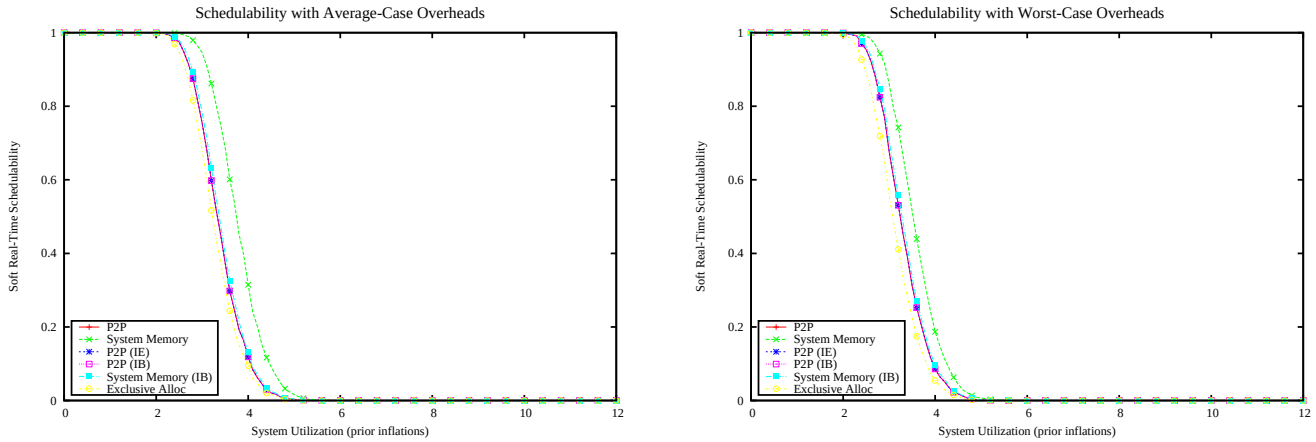

Figure 6143: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

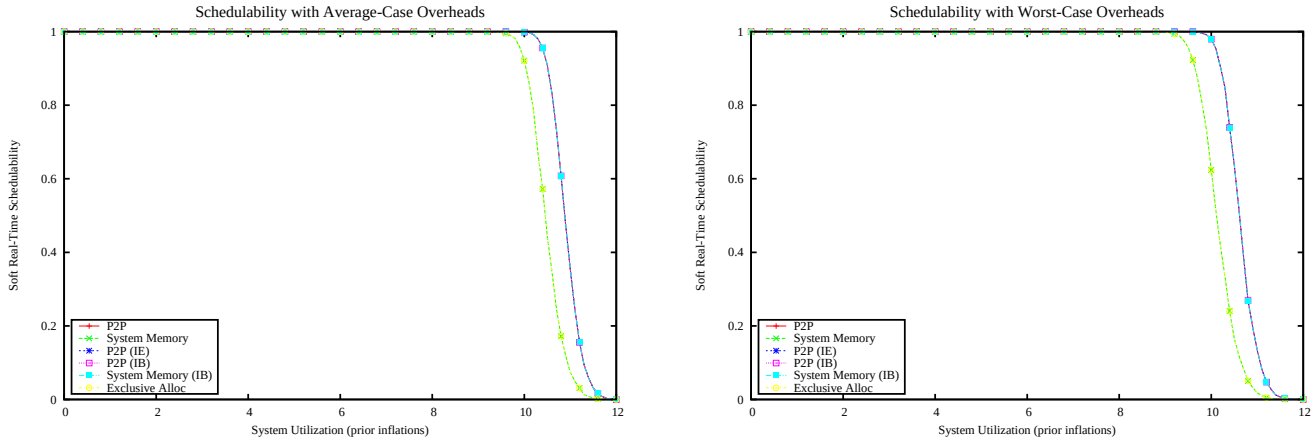

Figure 6144: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

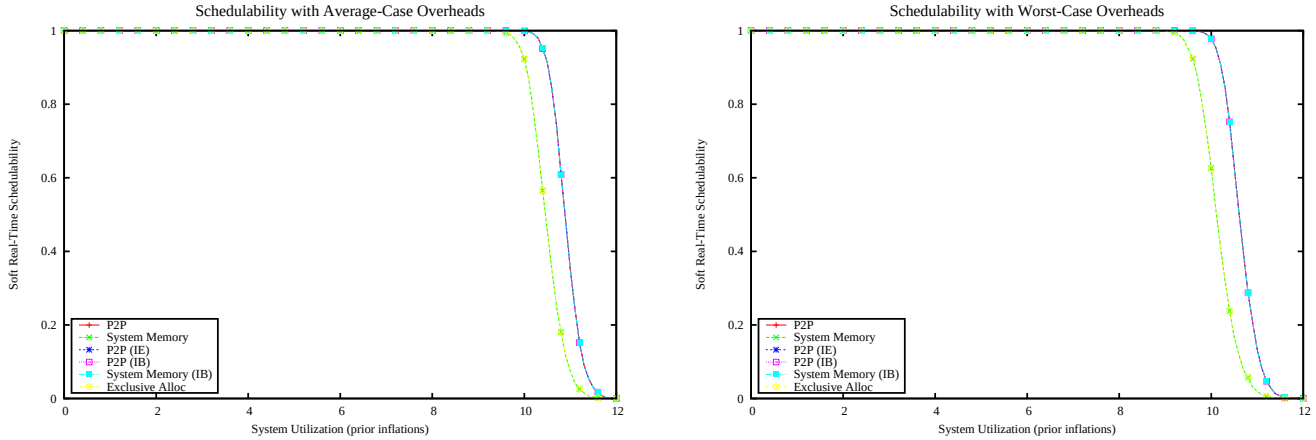

Figure 6145: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

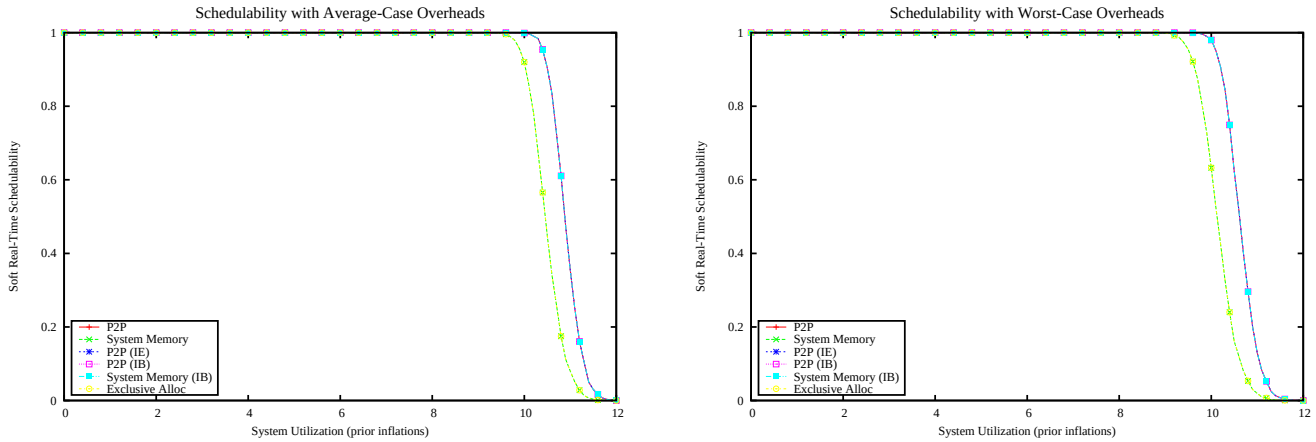

Figure 6146: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

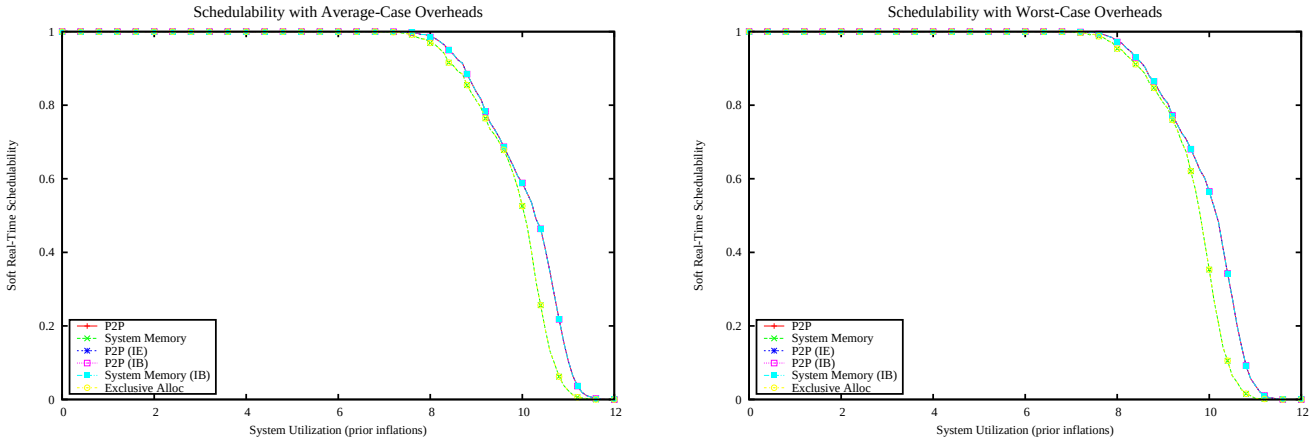

Figure 6147: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

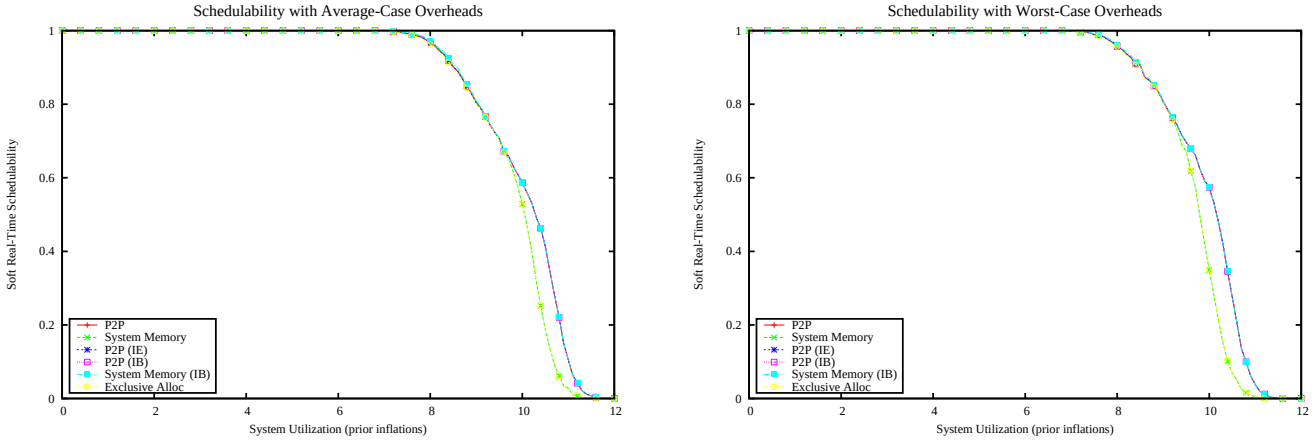

Figure 6148: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

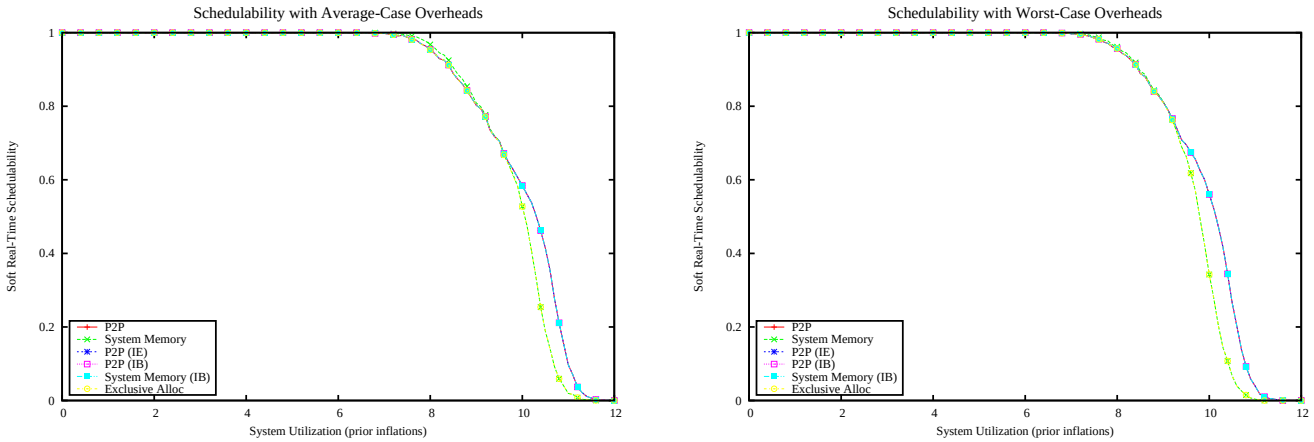

Figure 6149: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

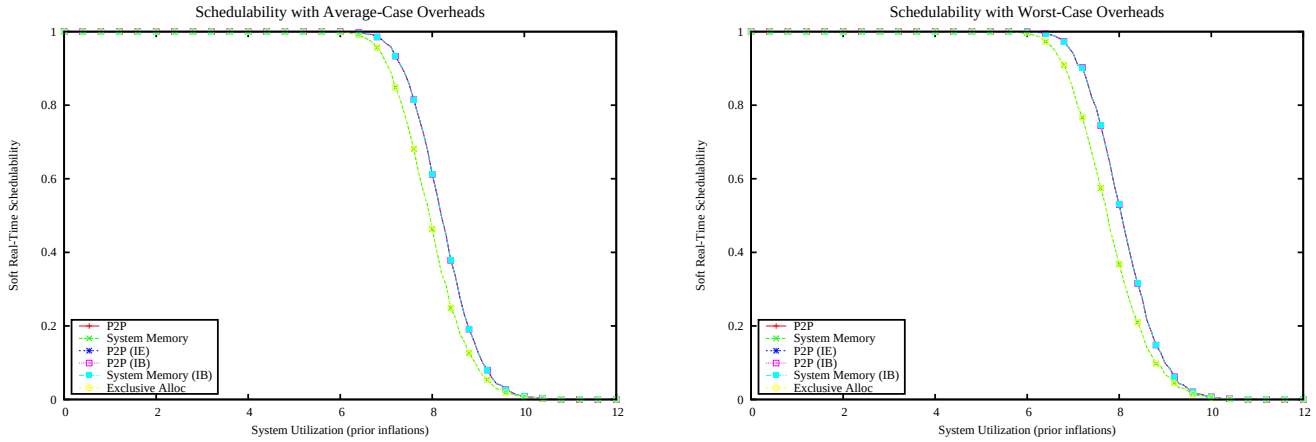

Figure 6150: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

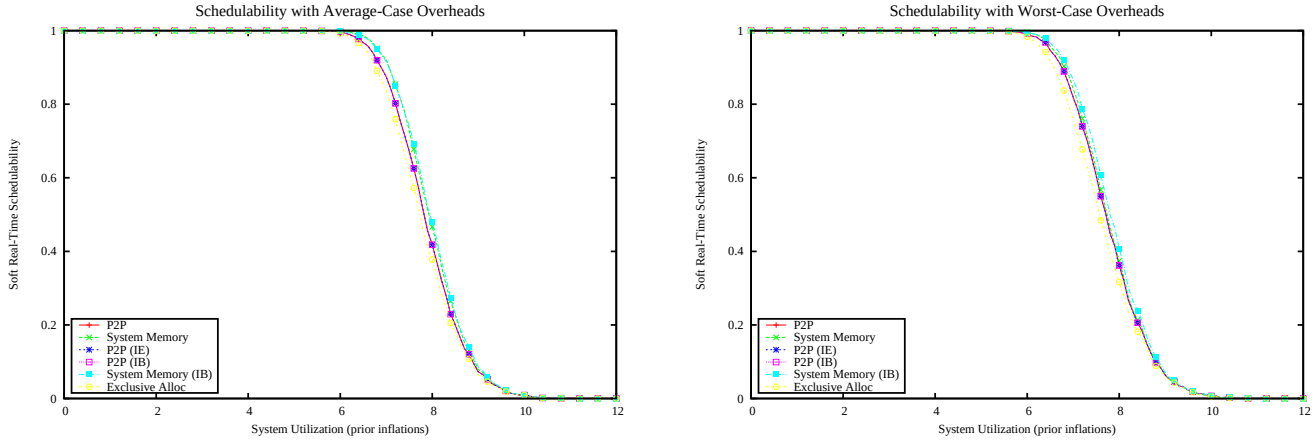

Figure 6151: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

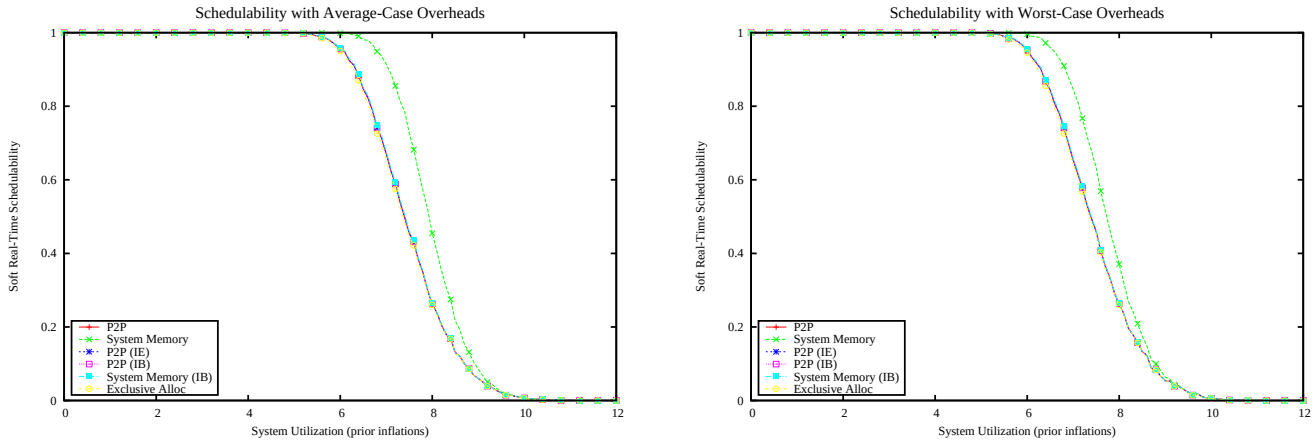

Figure 6152: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

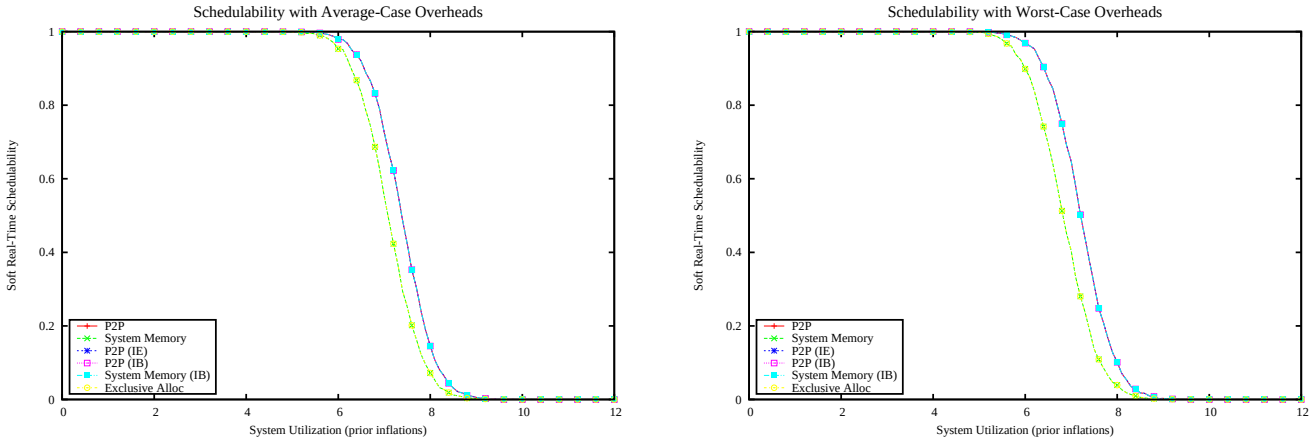

Figure 6153: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

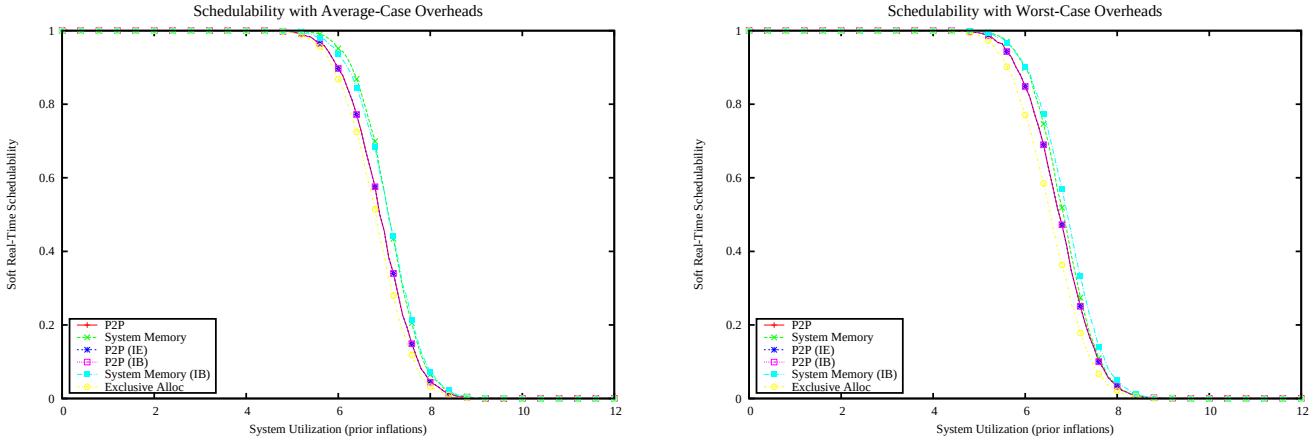

Figure 6154: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

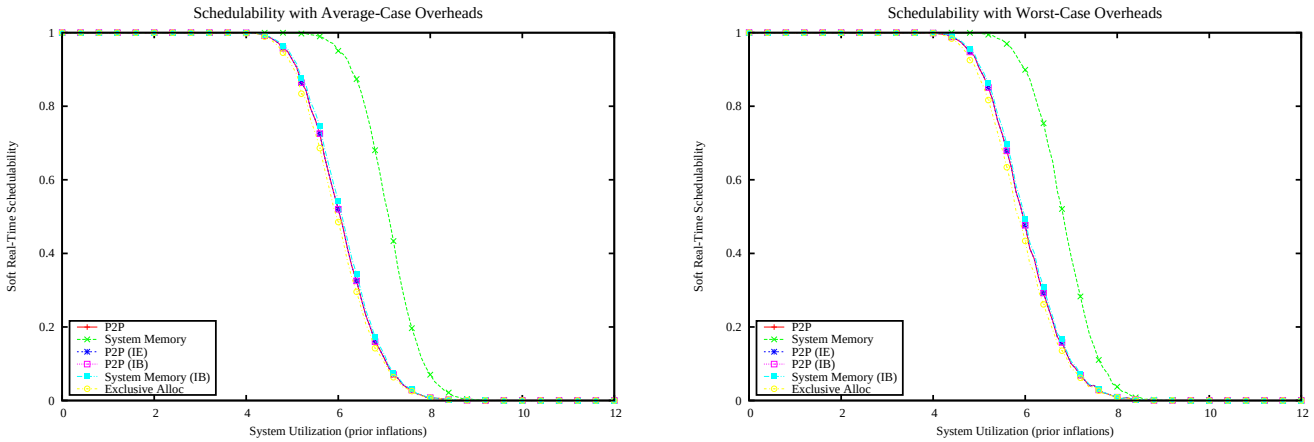

Figure 6155: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

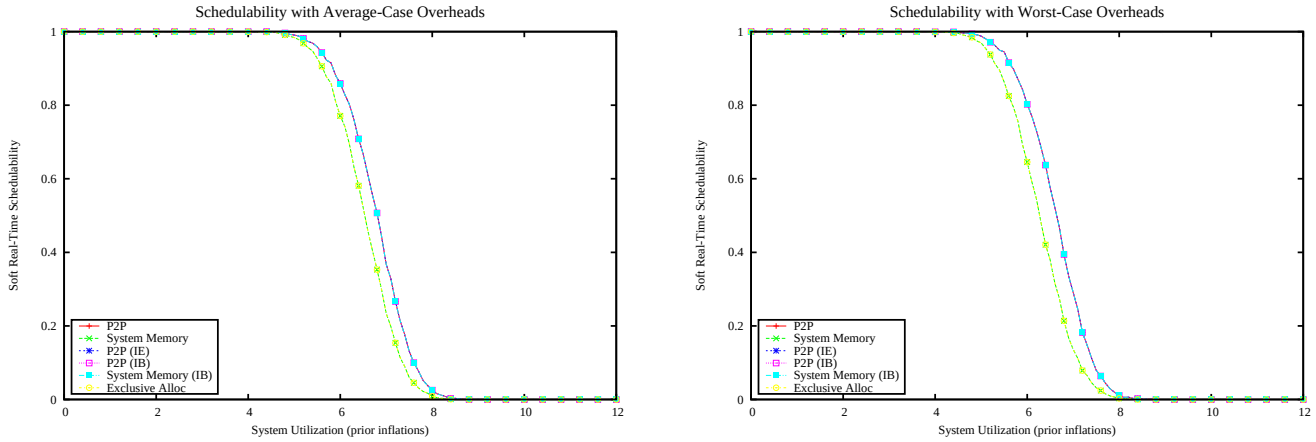

Figure 6156: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

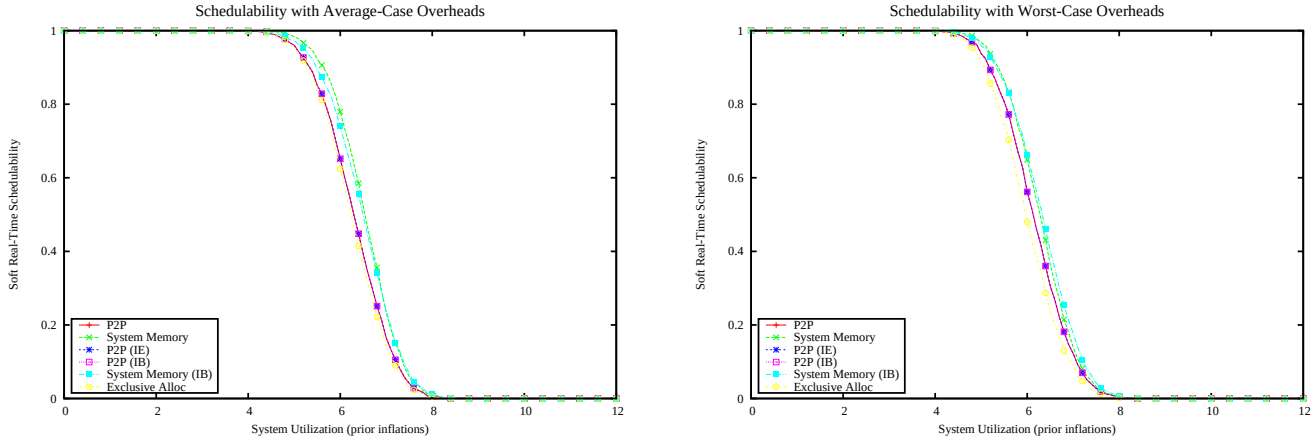

Figure 6157: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

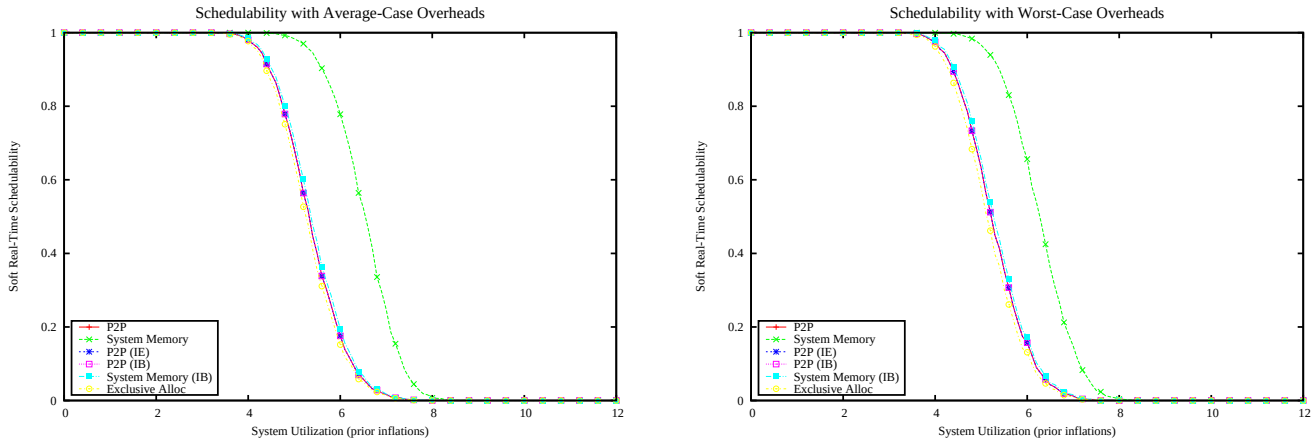

Figure 6158: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

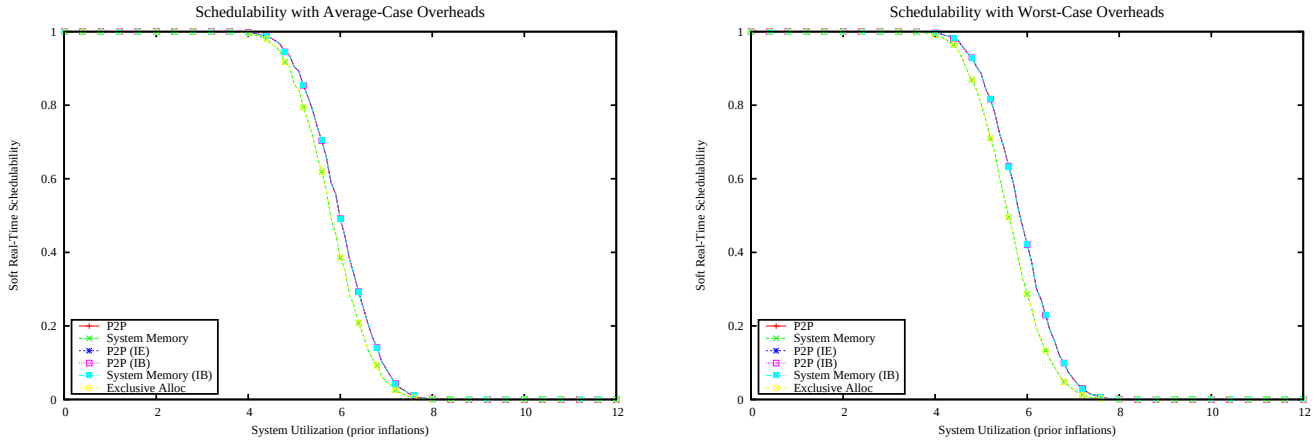

Figure 6159: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

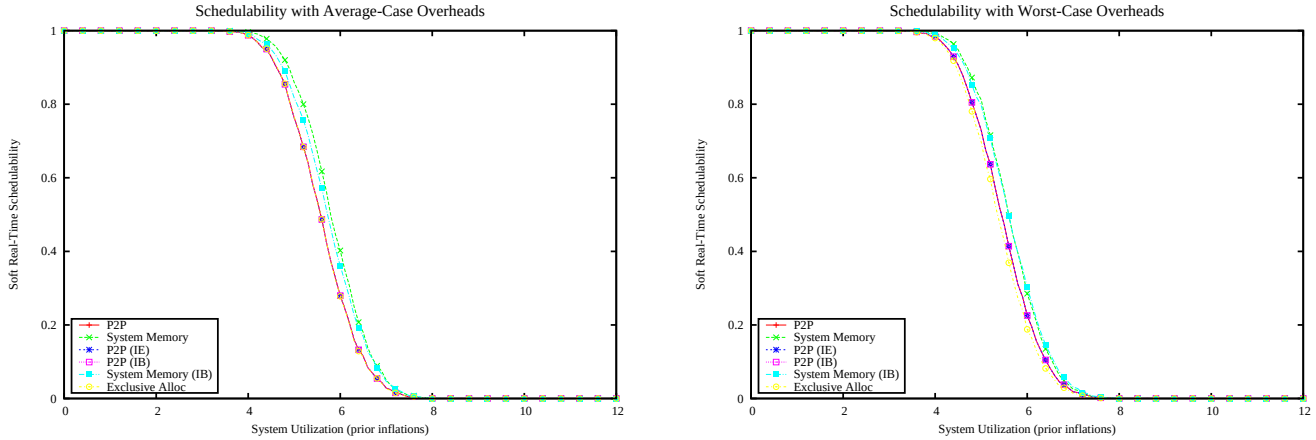

Figure 6160: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

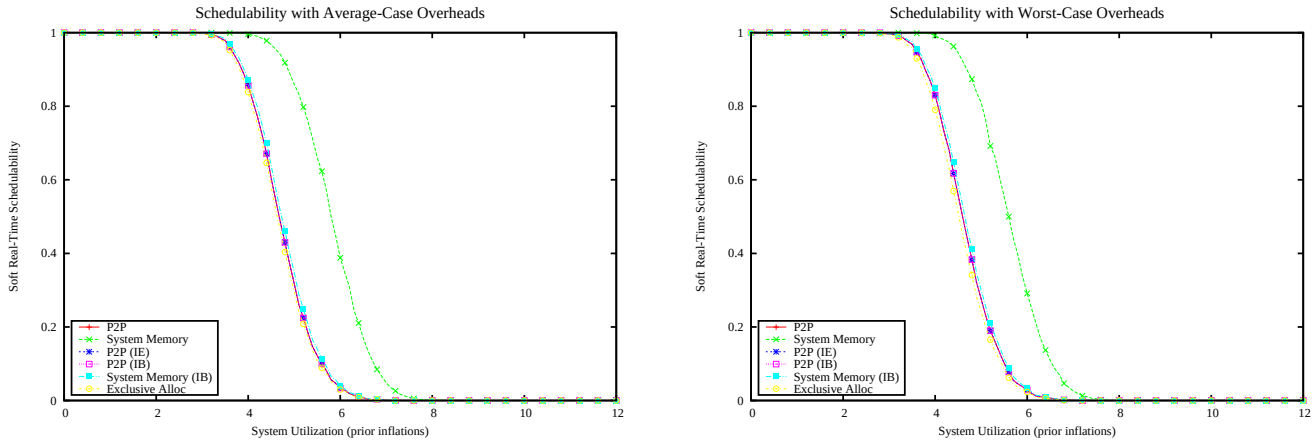

Figure 6161: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

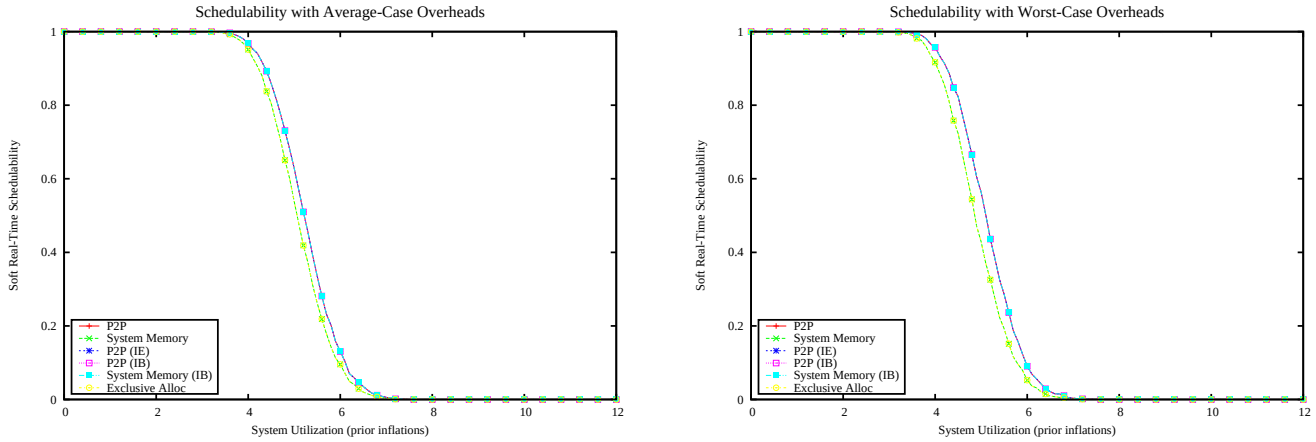

Figure 6162: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

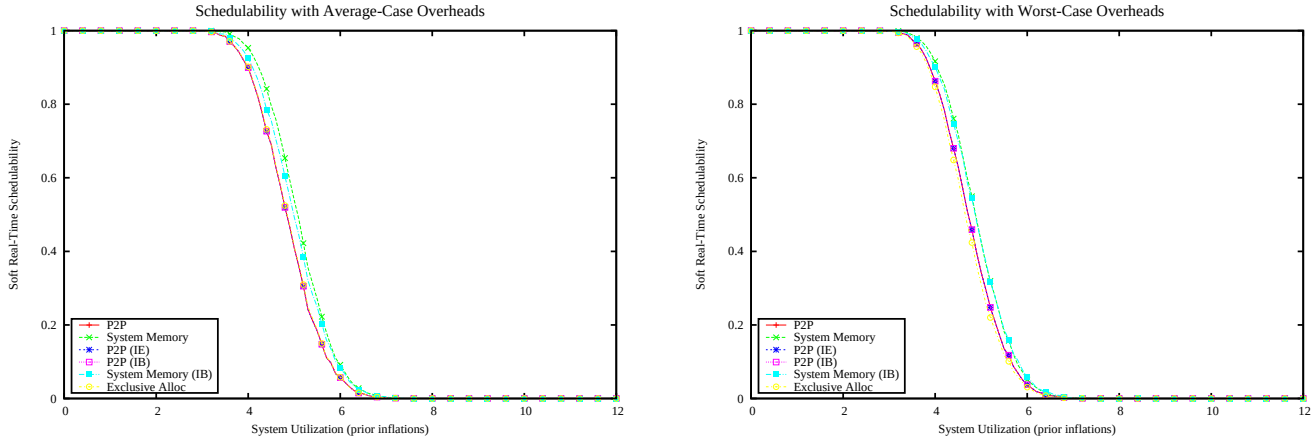

Figure 6163: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

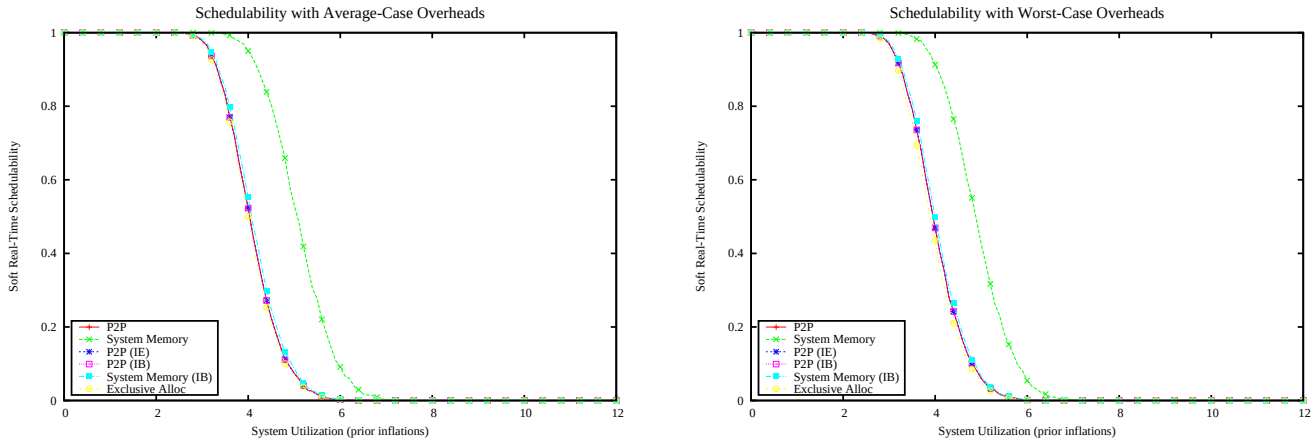

Figure 6164: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

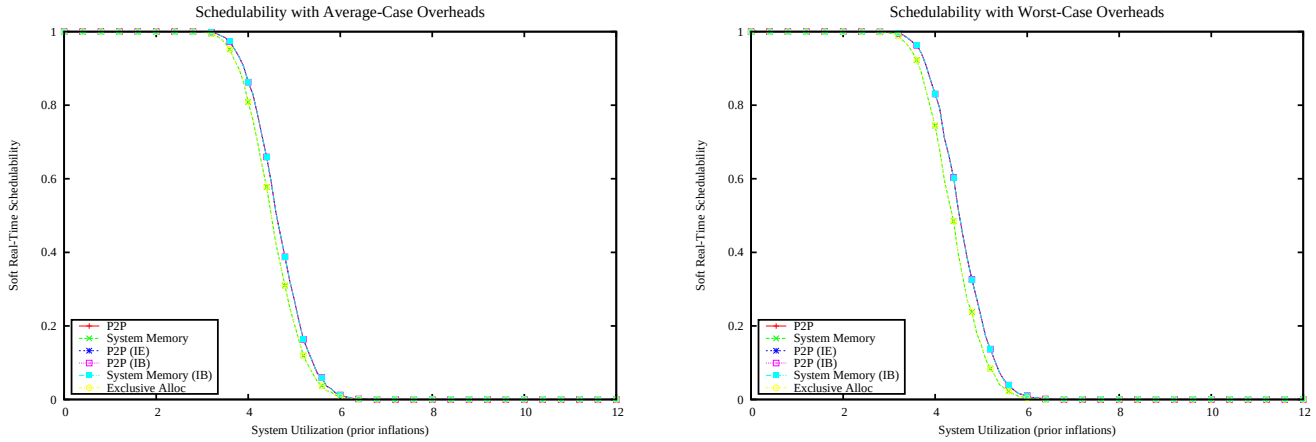

Figure 6165: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

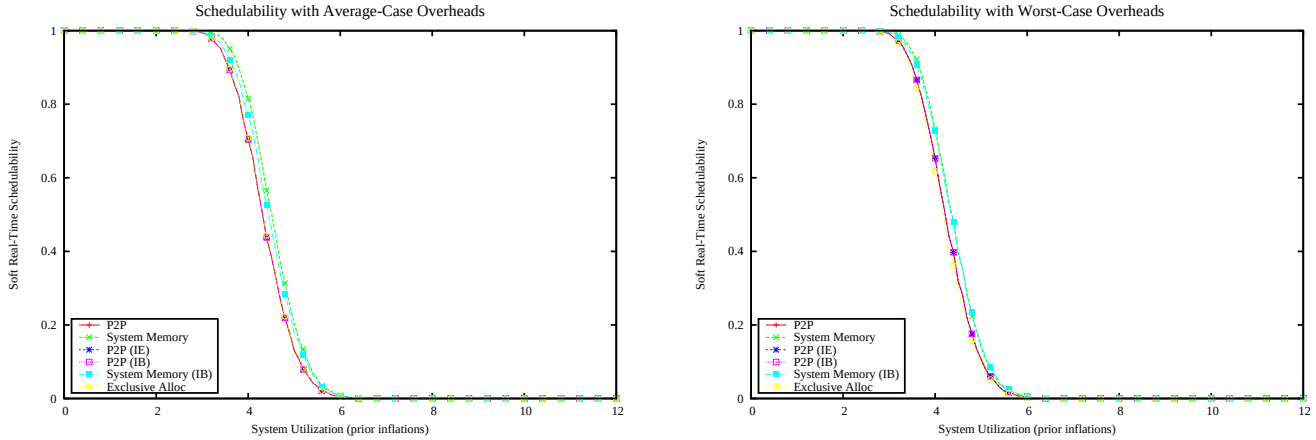

Figure 6166: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

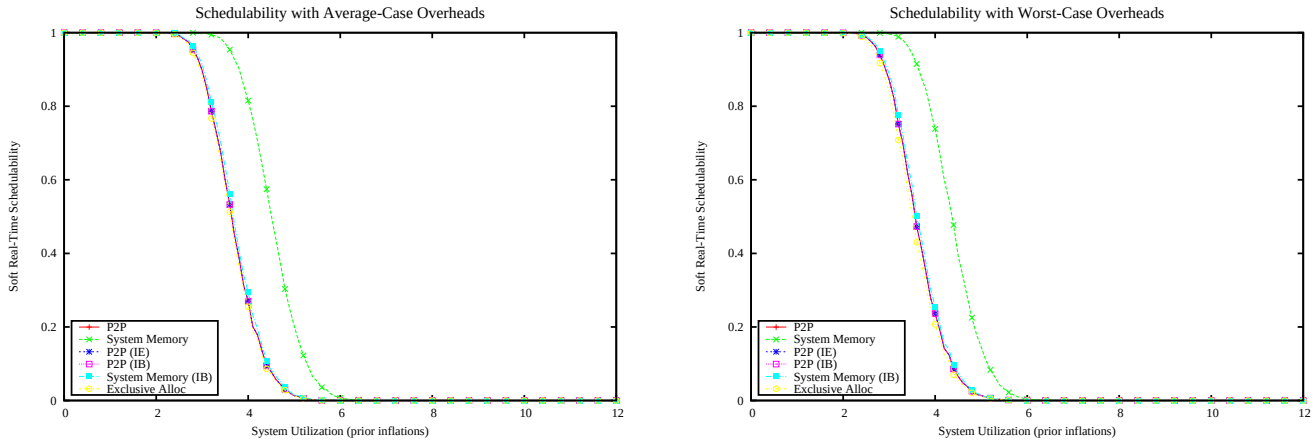

Figure 6167: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

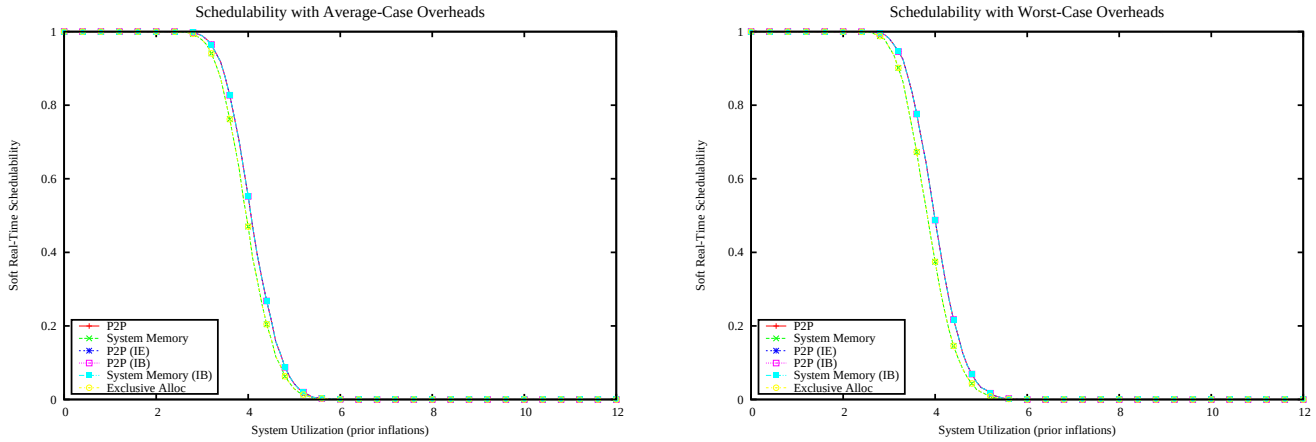

Figure 6168: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

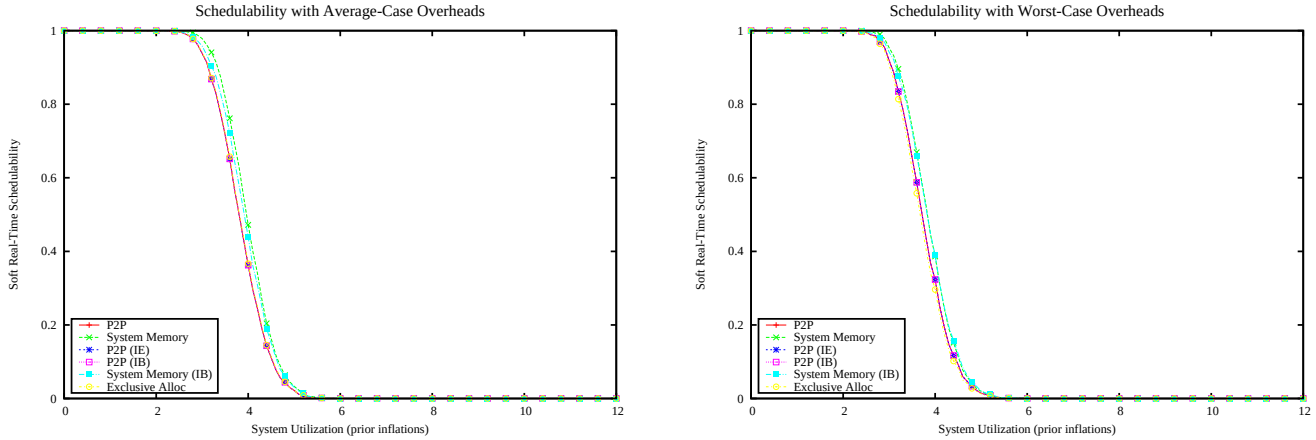

Figure 6169: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

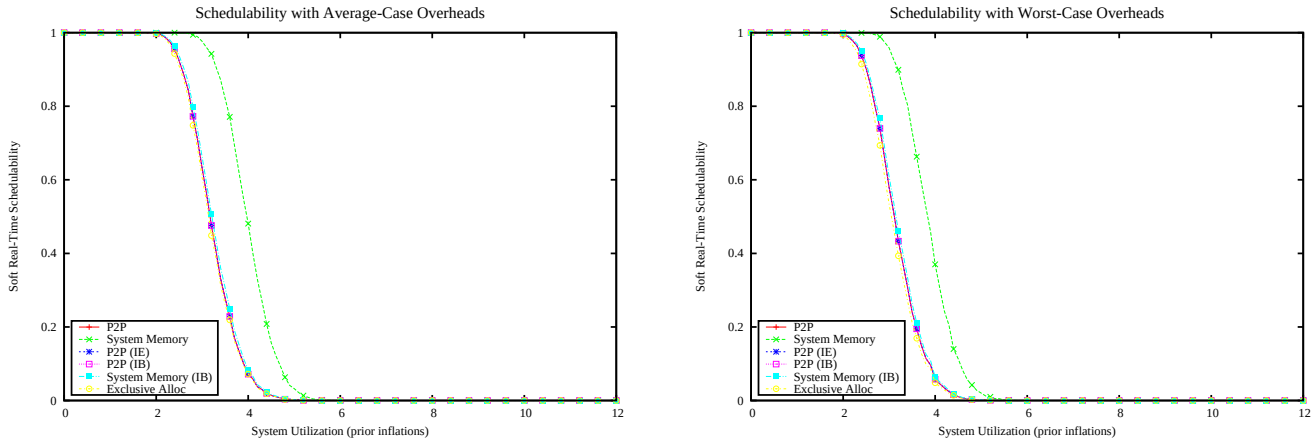

Figure 6170: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

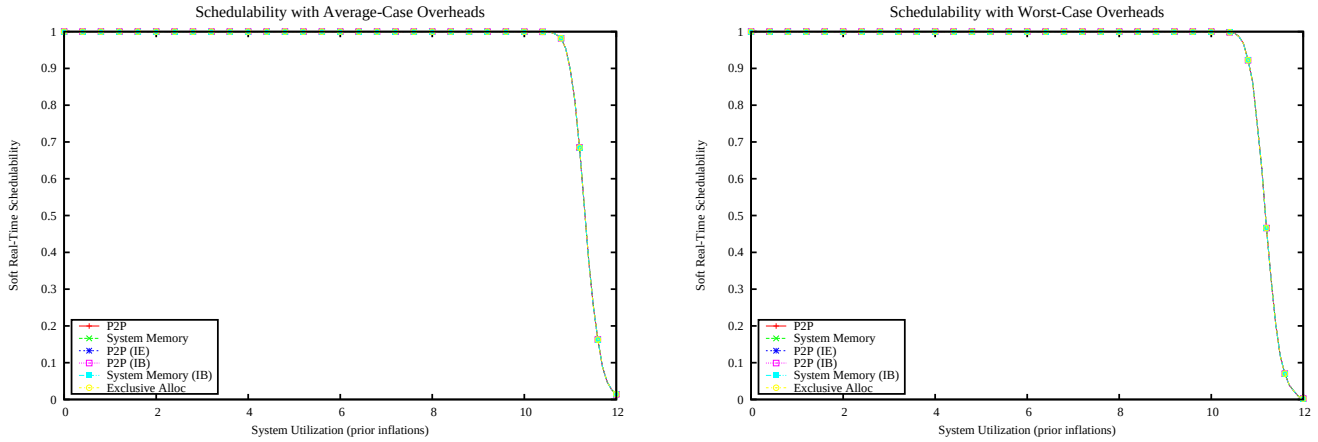

Figure 6171: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

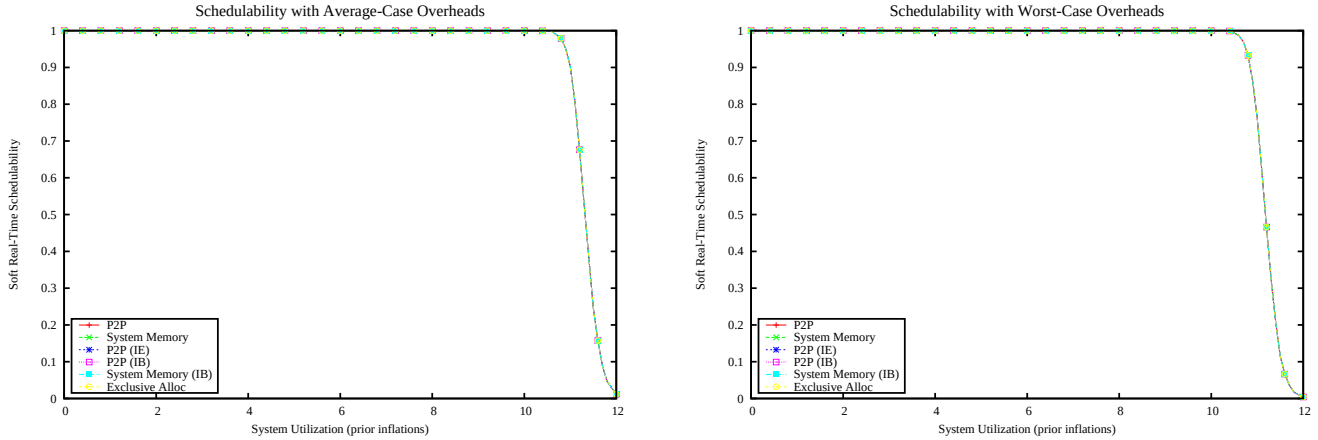

Figure 6172: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

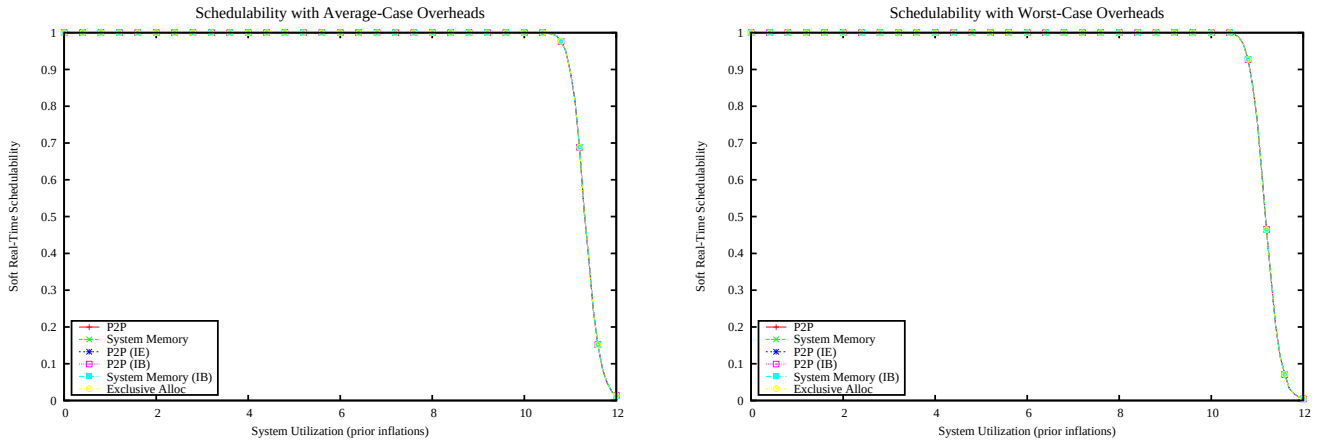

Figure 6173: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

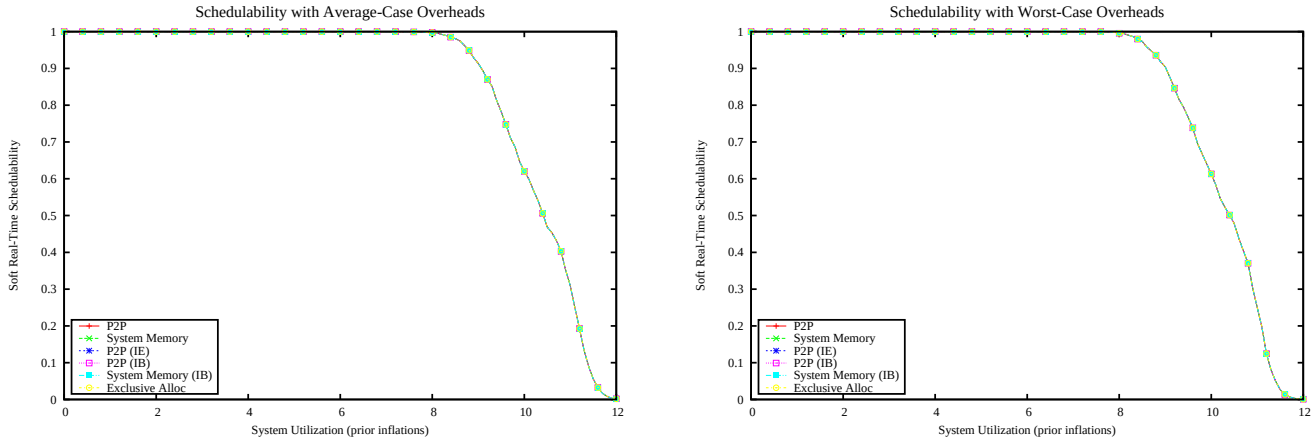

Figure 6174: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

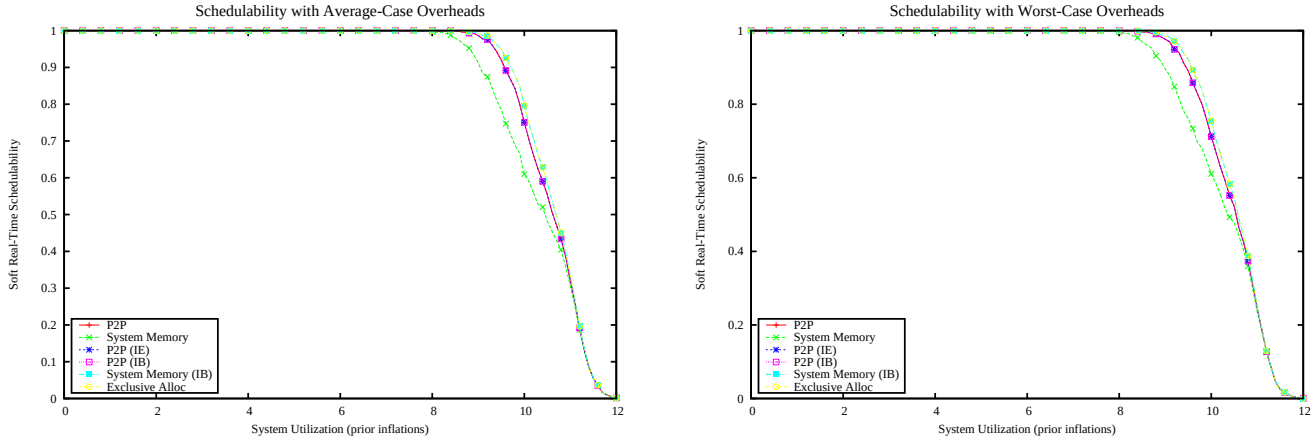

Figure 6175: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

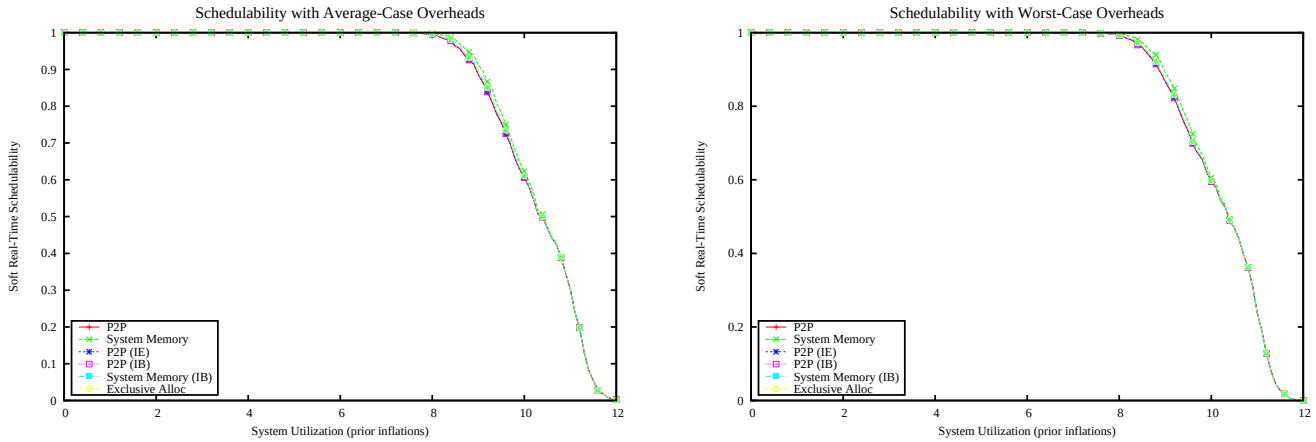

Figure 6176: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

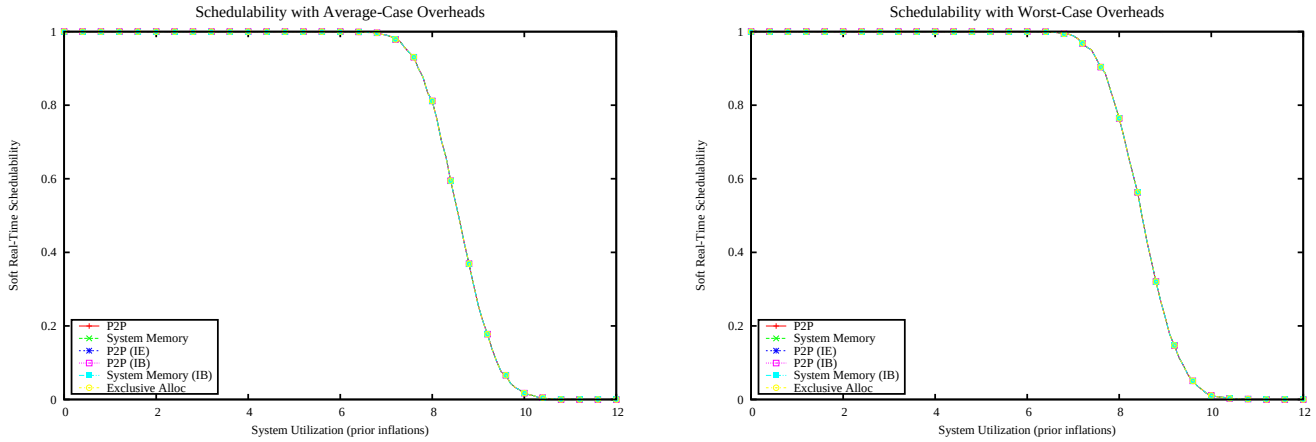

Figure 6177: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

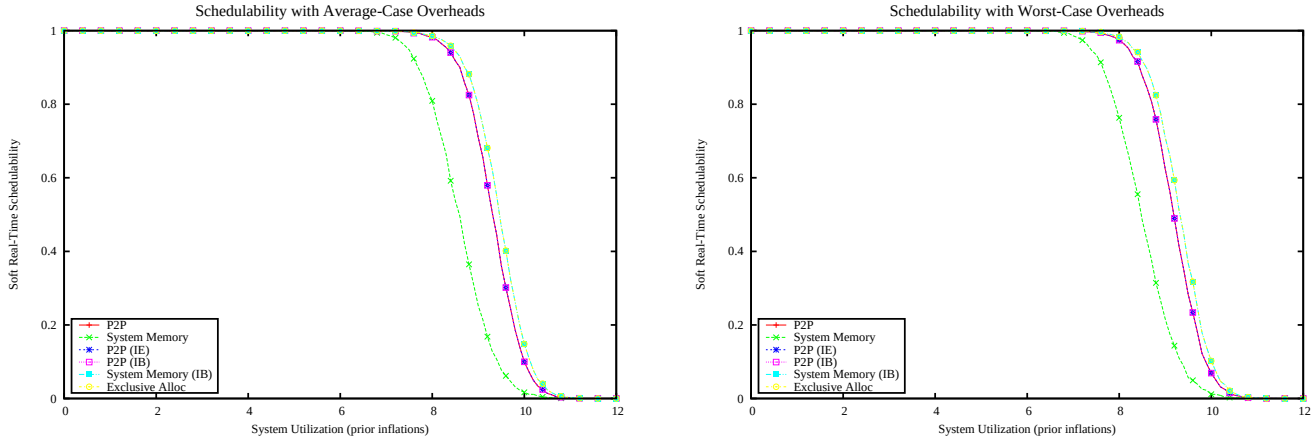

Figure 6178: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

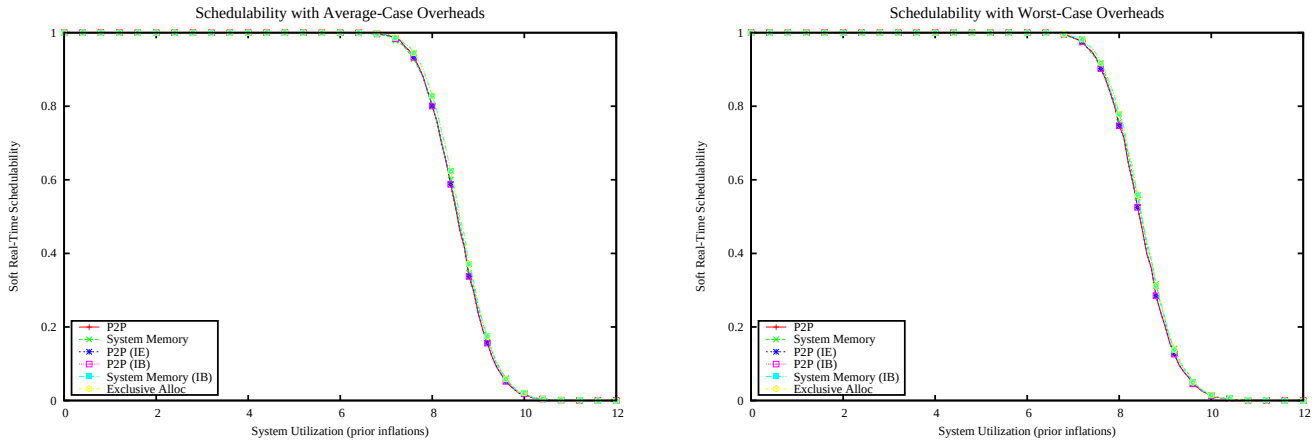

Figure 6179: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

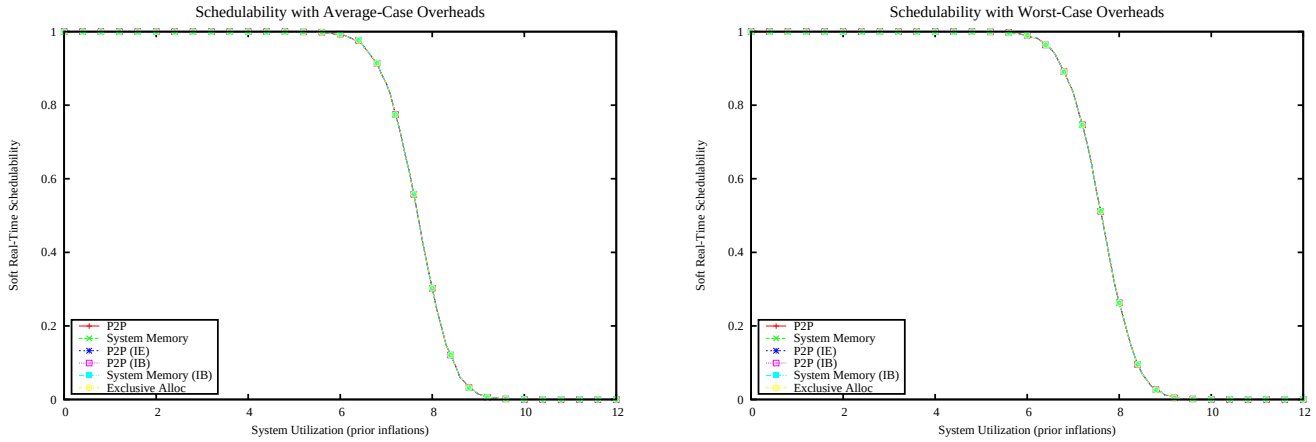

Figure 6180: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

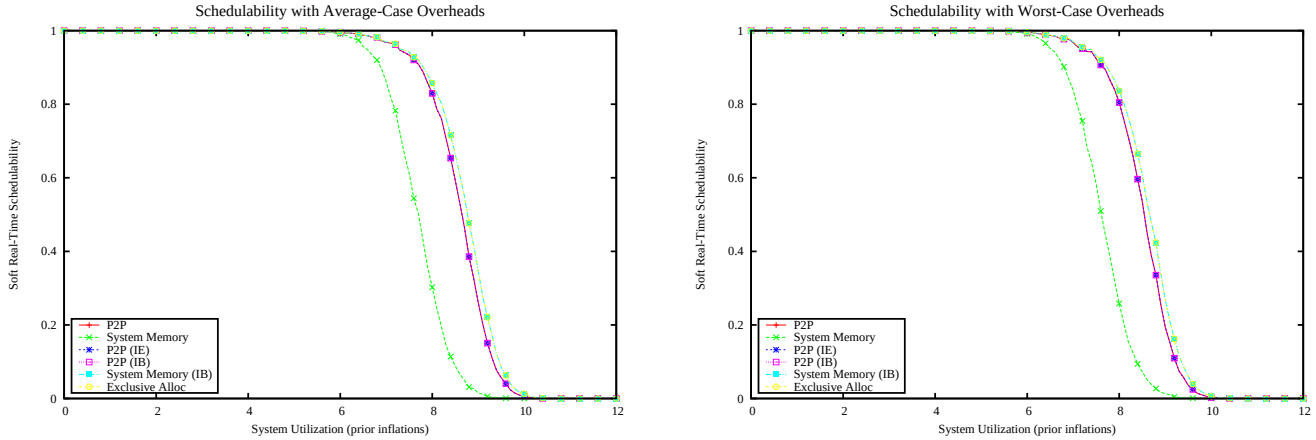

Figure 6181: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

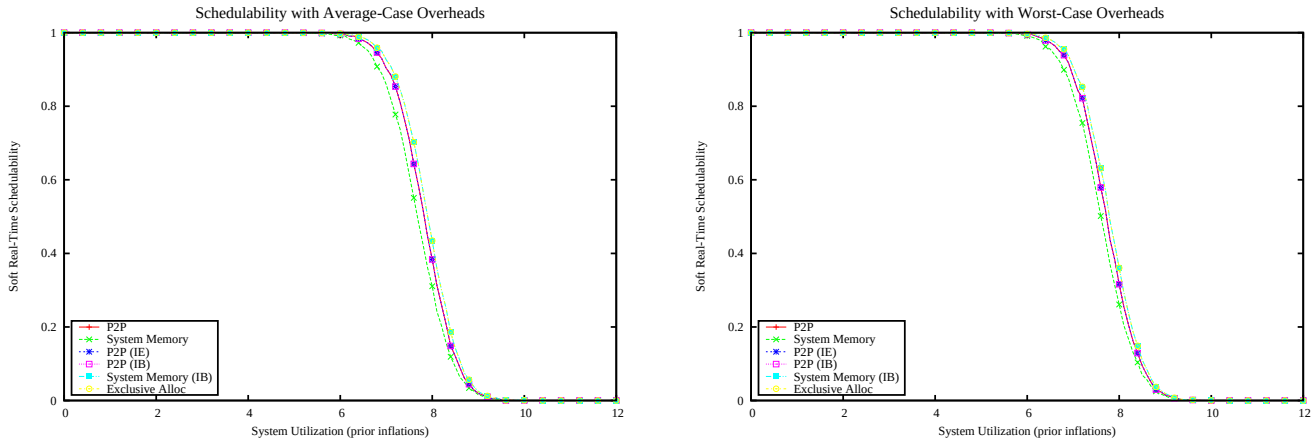

Figure 6182: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

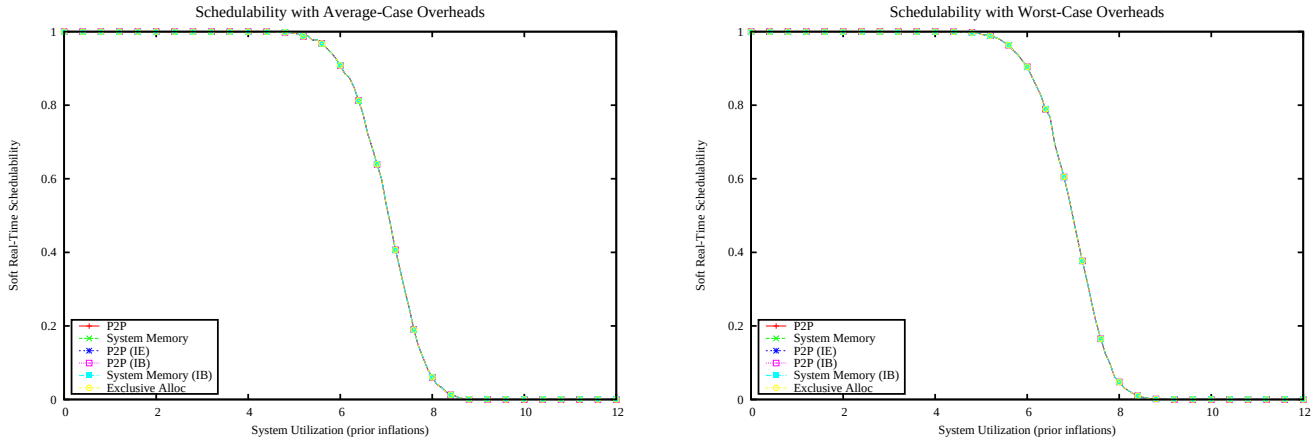

Figure 6183: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

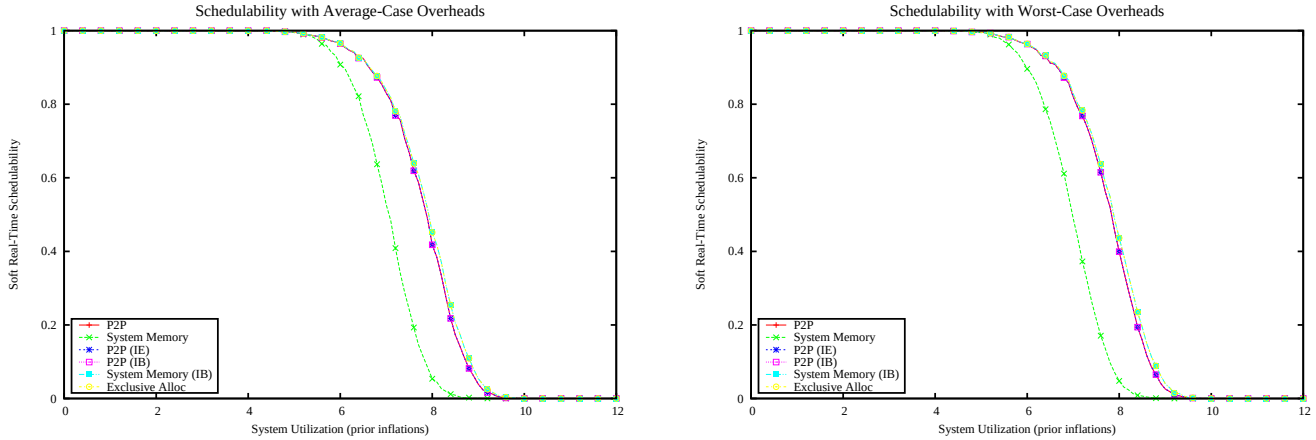

Figure 6184: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

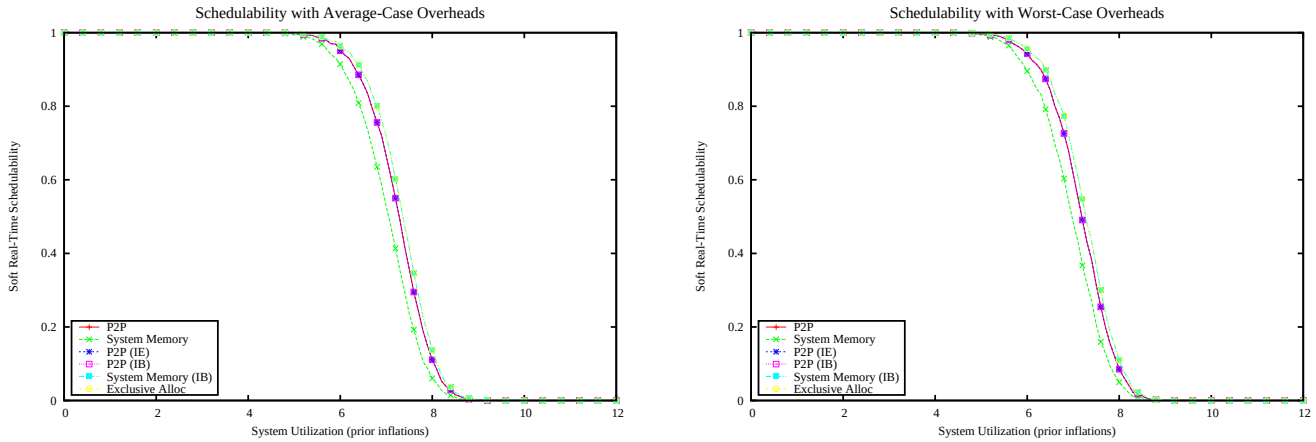

Figure 6185: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

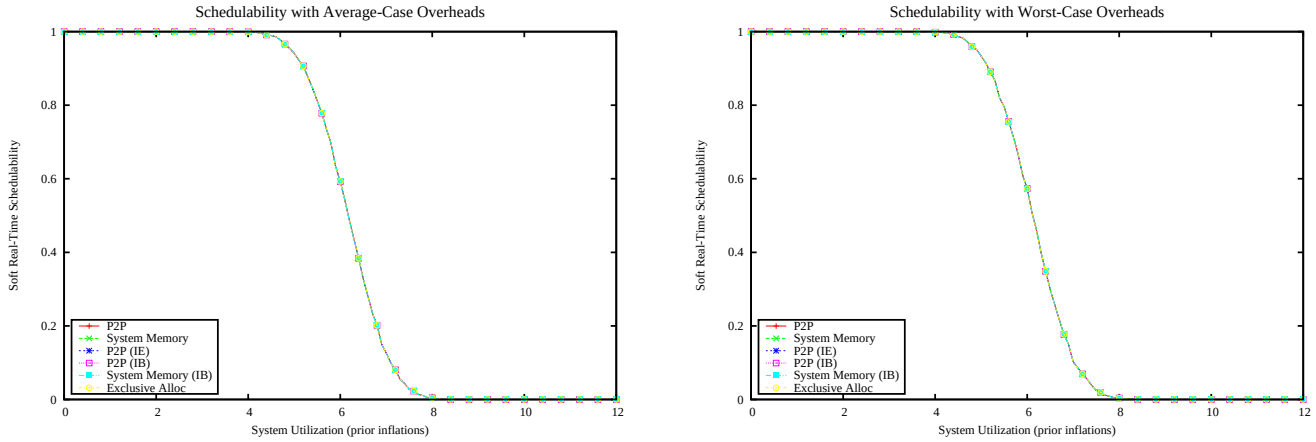

Figure 6186: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

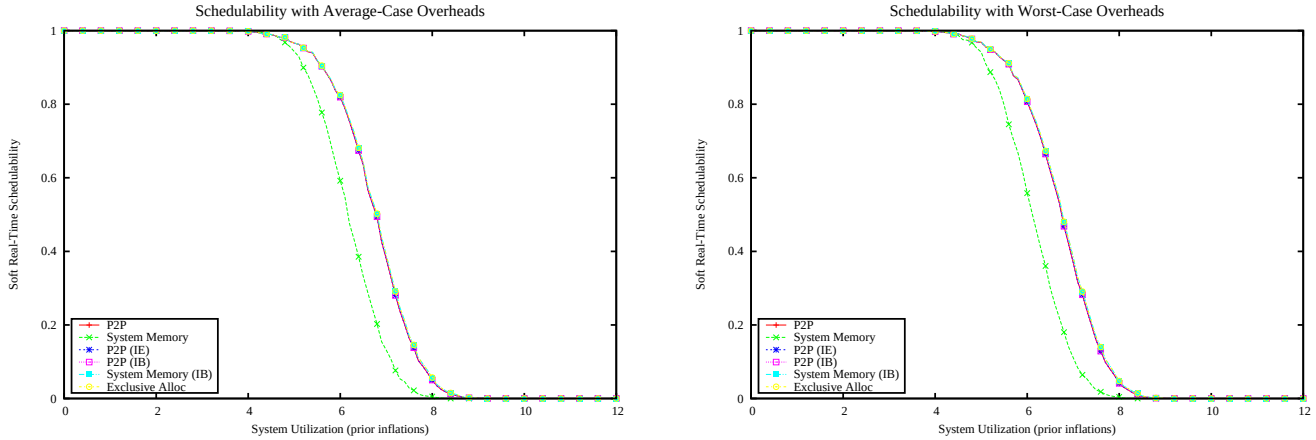

Figure 6187: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

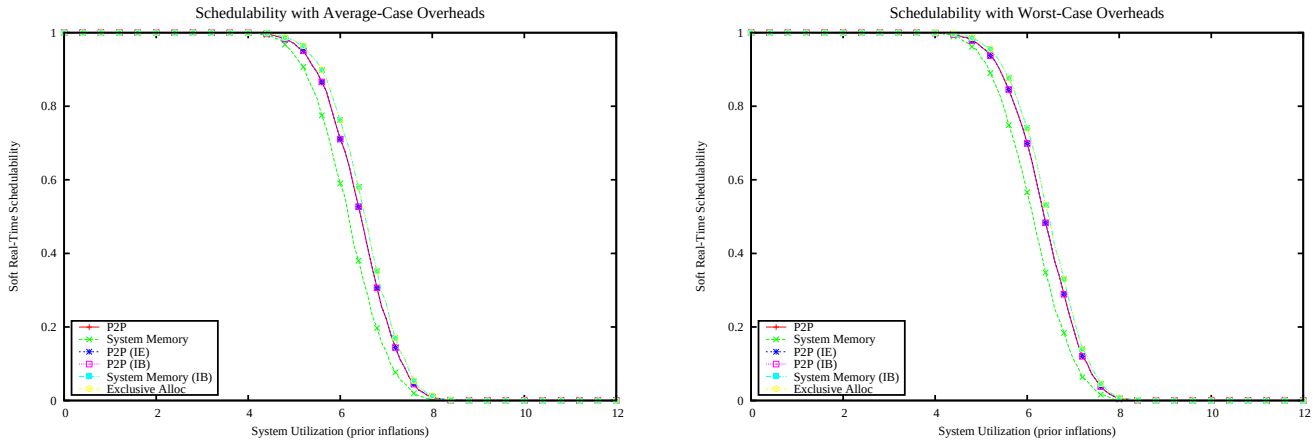

Figure 6188: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

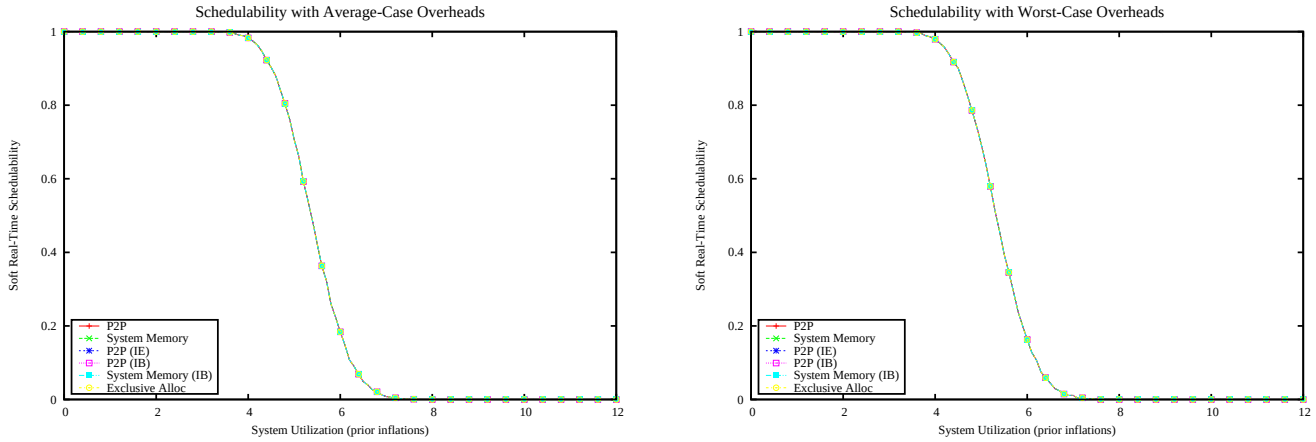

Figure 6189: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

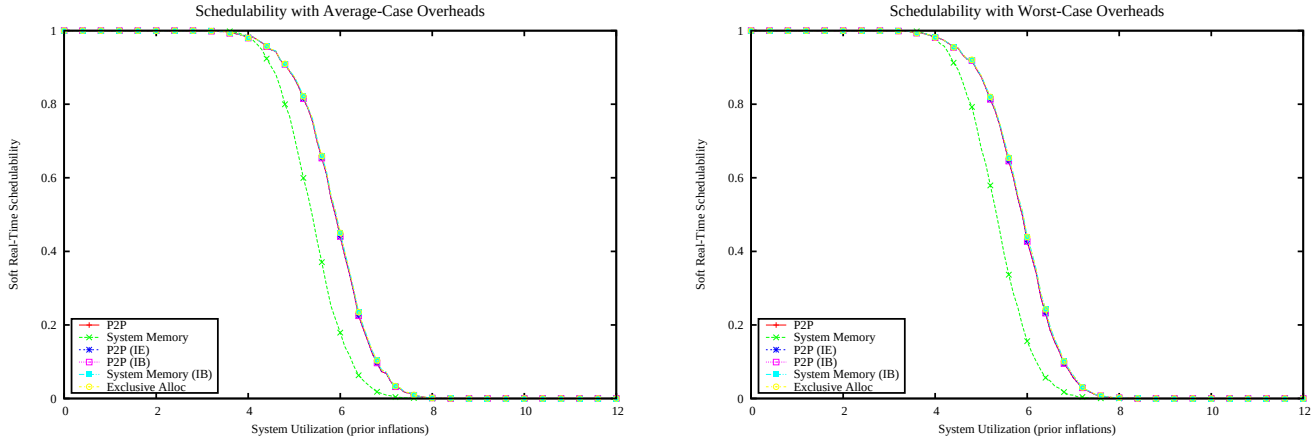

Figure 6190: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

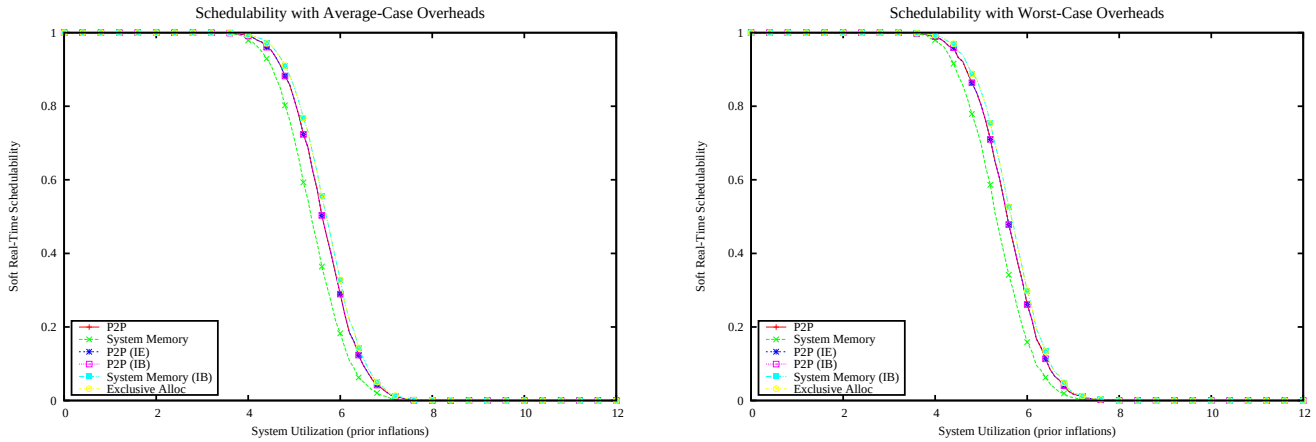

Figure 6191: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

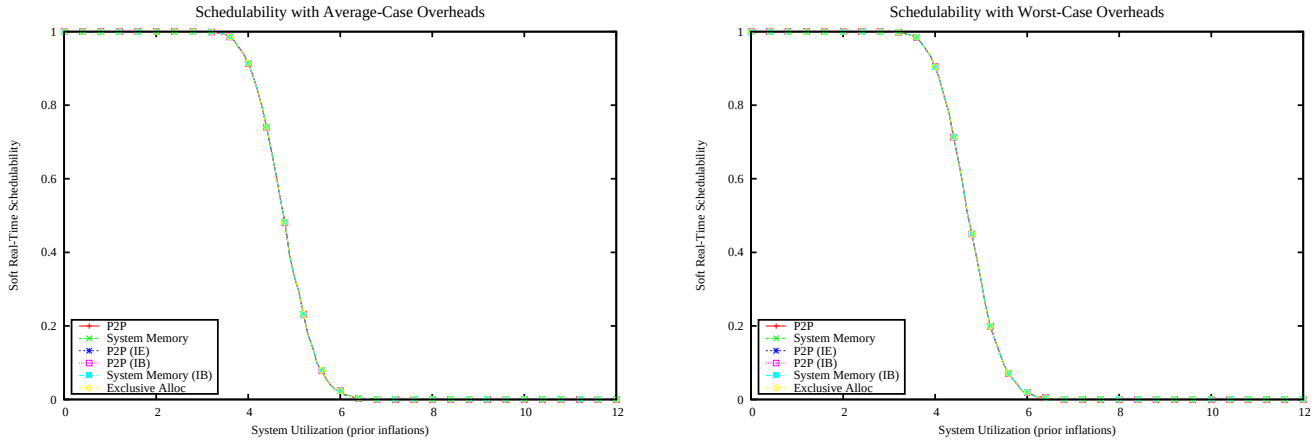

Figure 6192: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

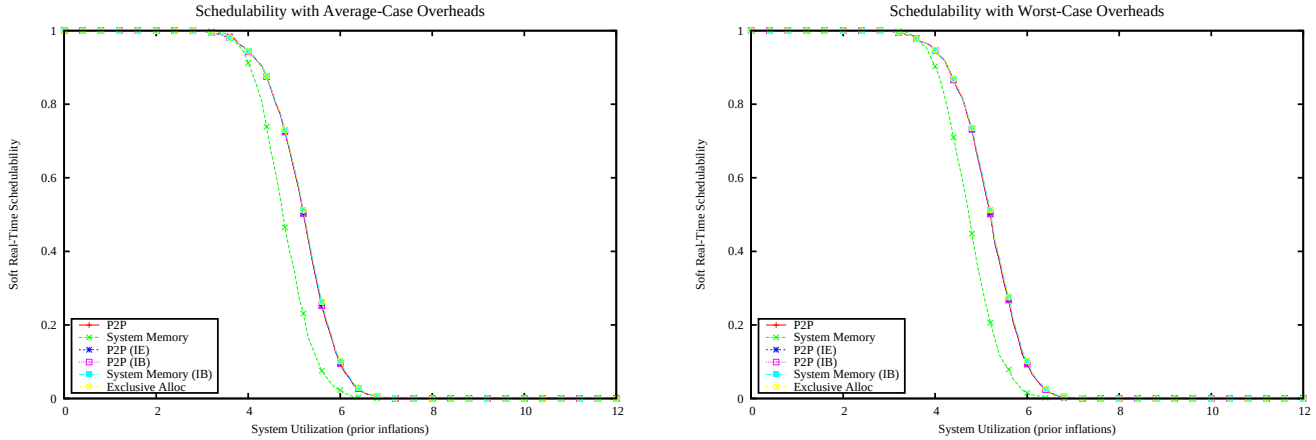

Figure 6193: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

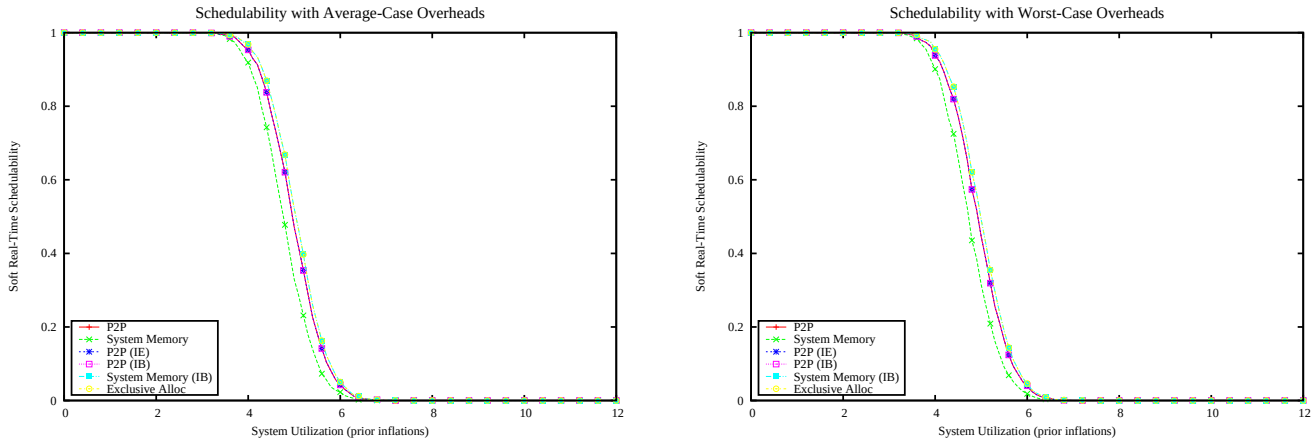

Figure 6194: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

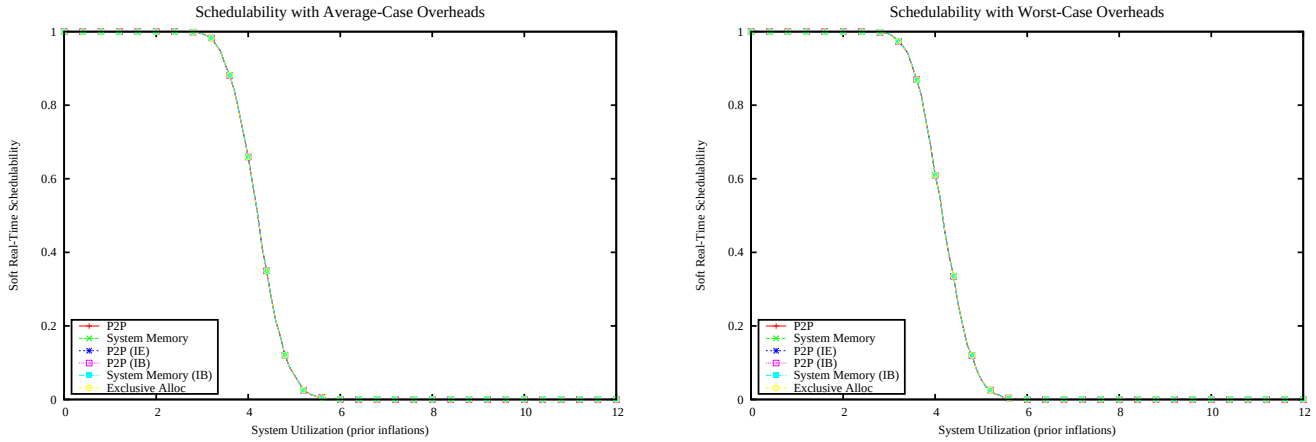

Figure 6195: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

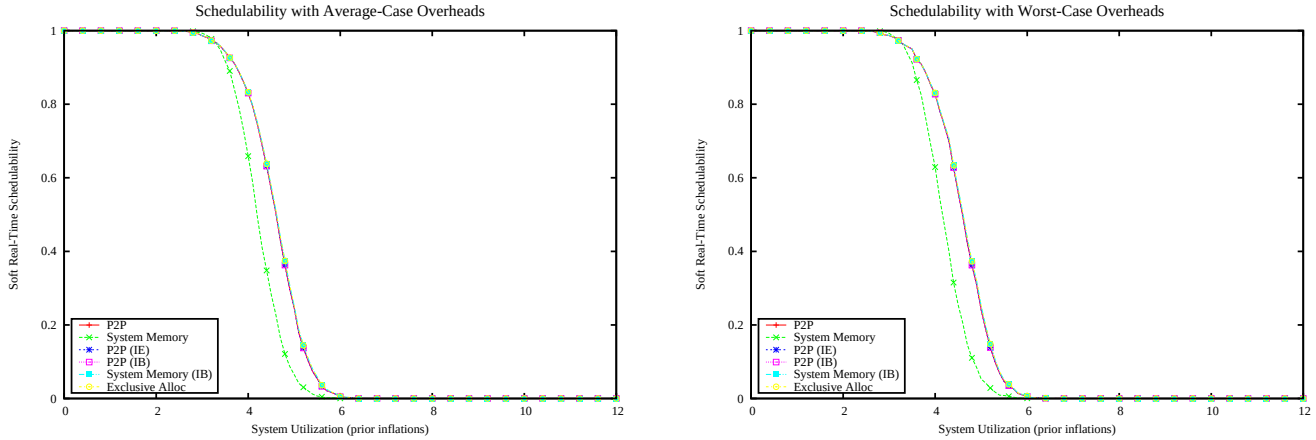

Figure 6196: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

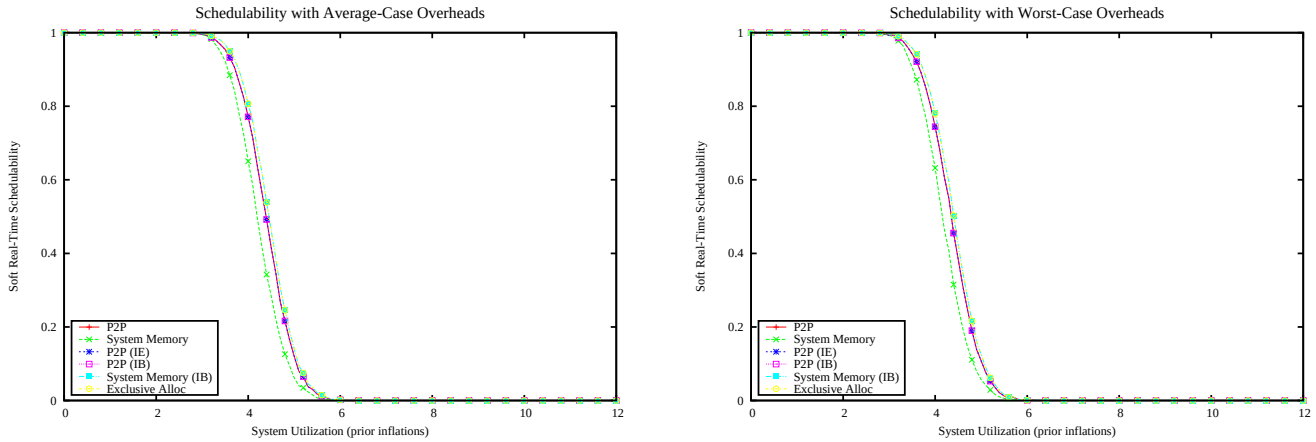

Figure 6197: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

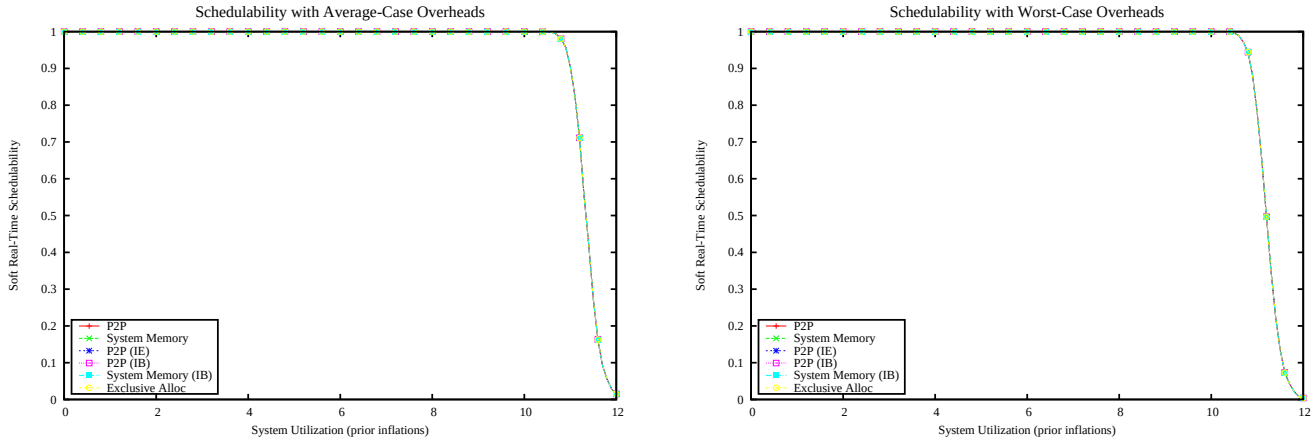

Figure 6198: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

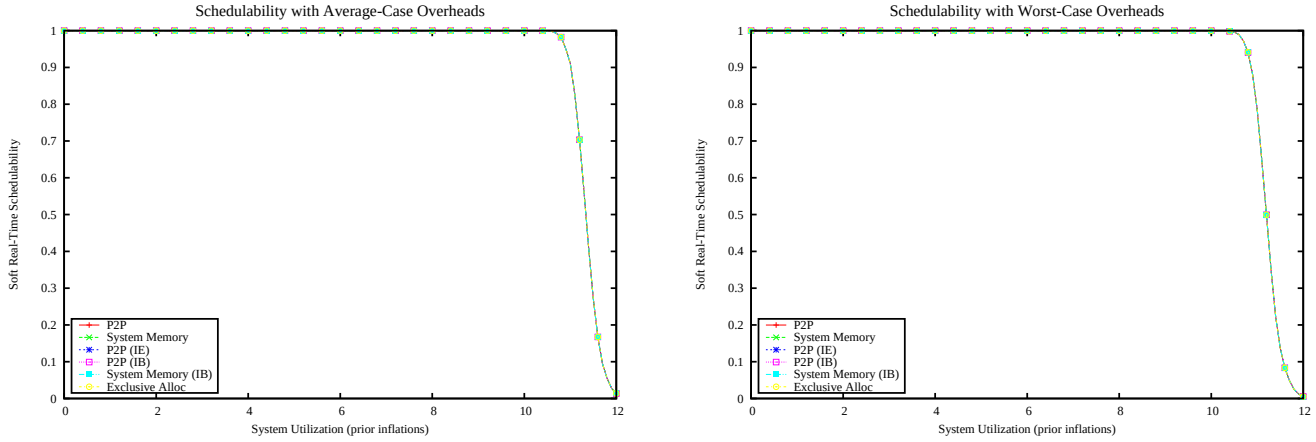

Figure 6199: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

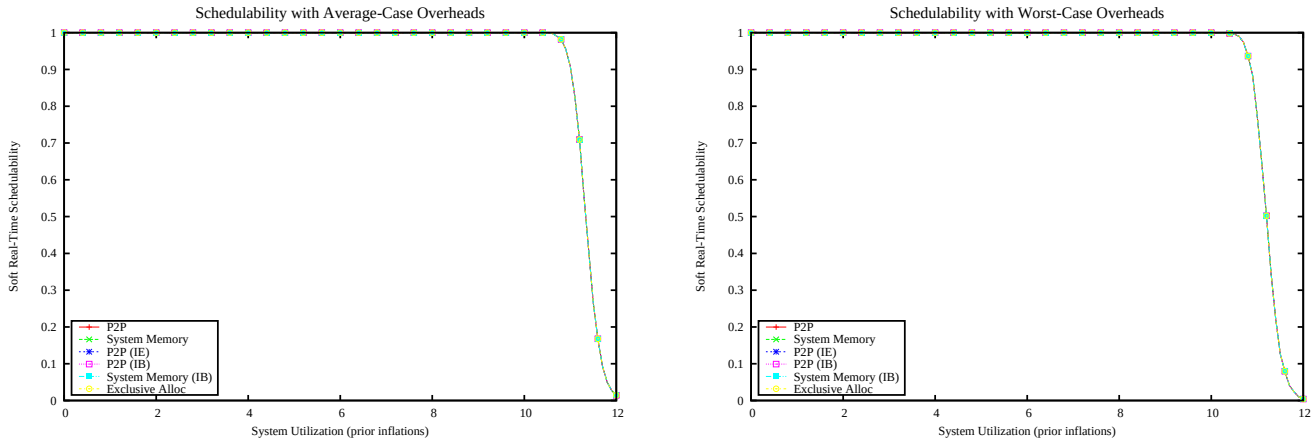

Figure 6200: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

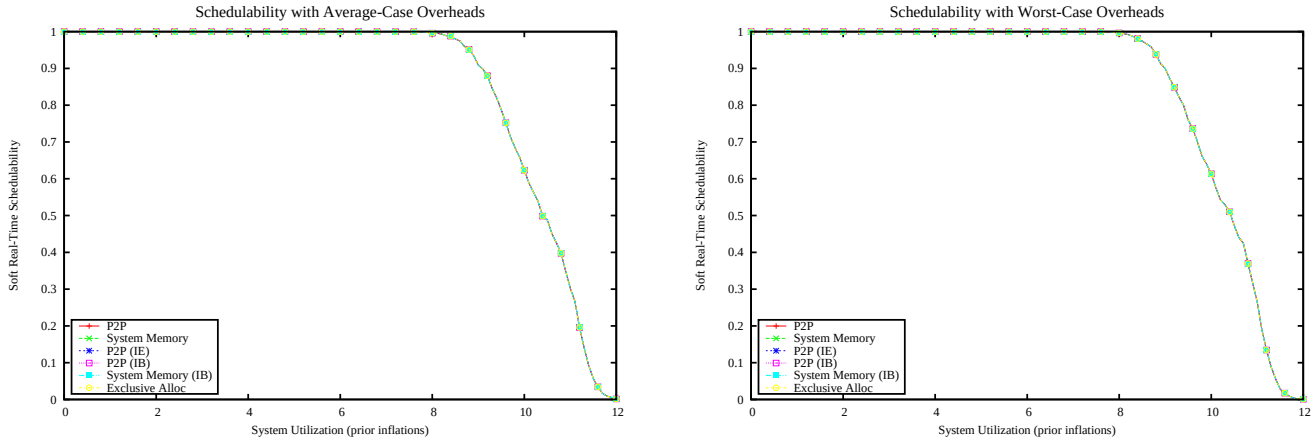

Figure 6201: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

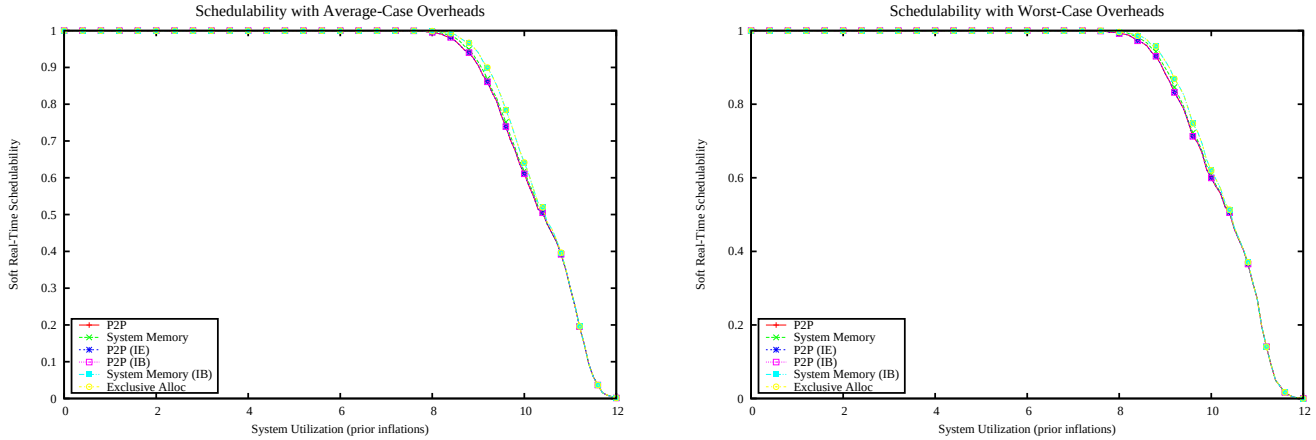

Figure 6202: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

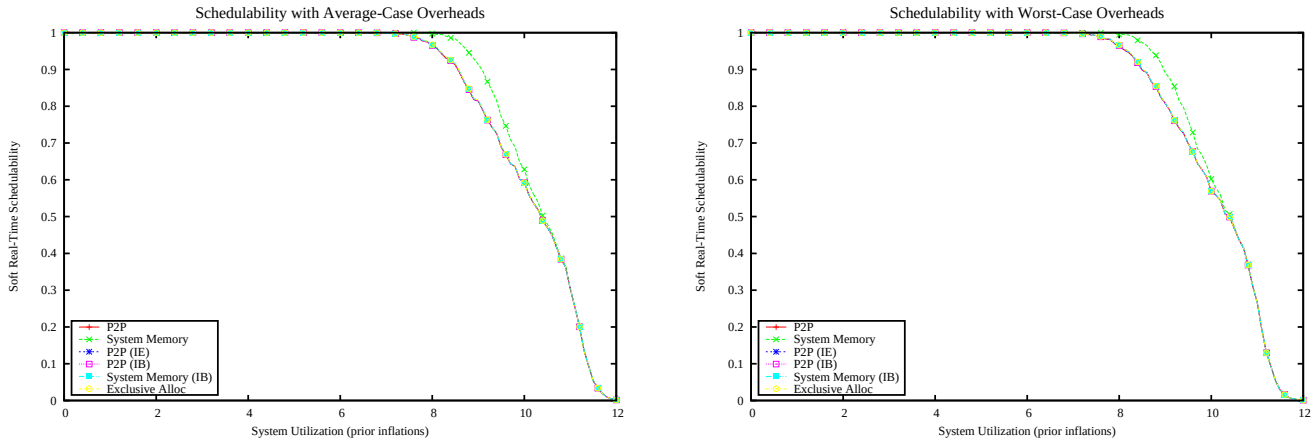

Figure 6203: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

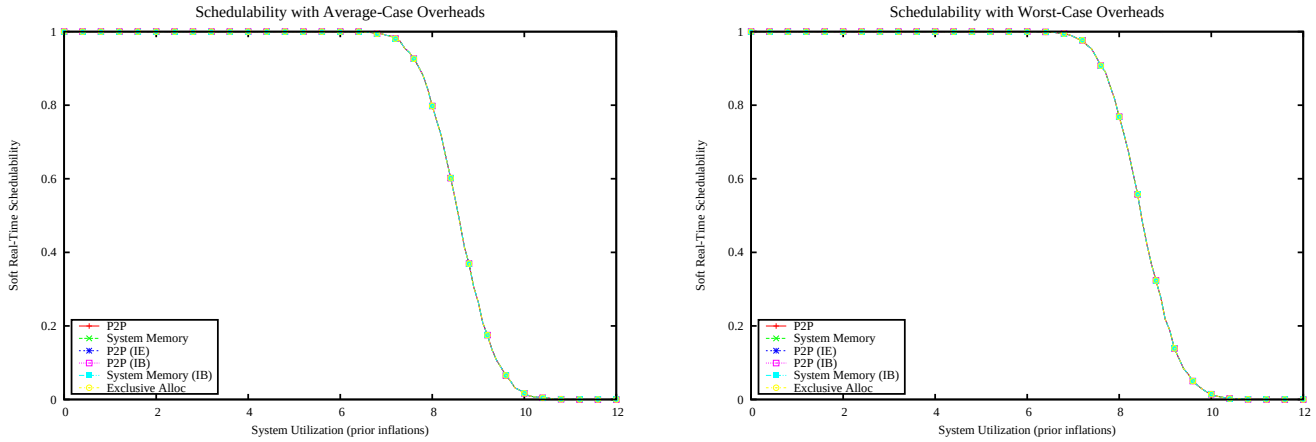

Figure 6204: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

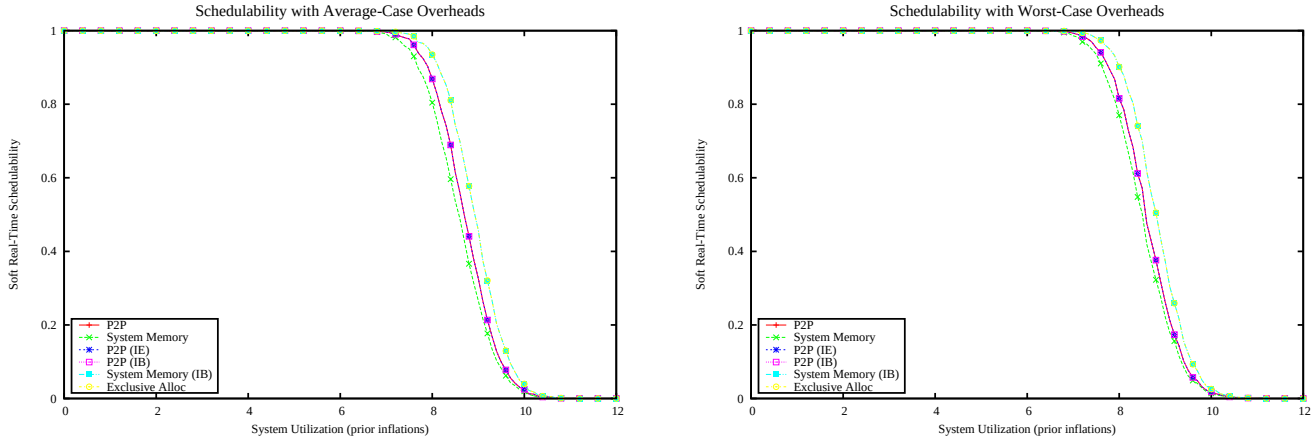

Figure 6205: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

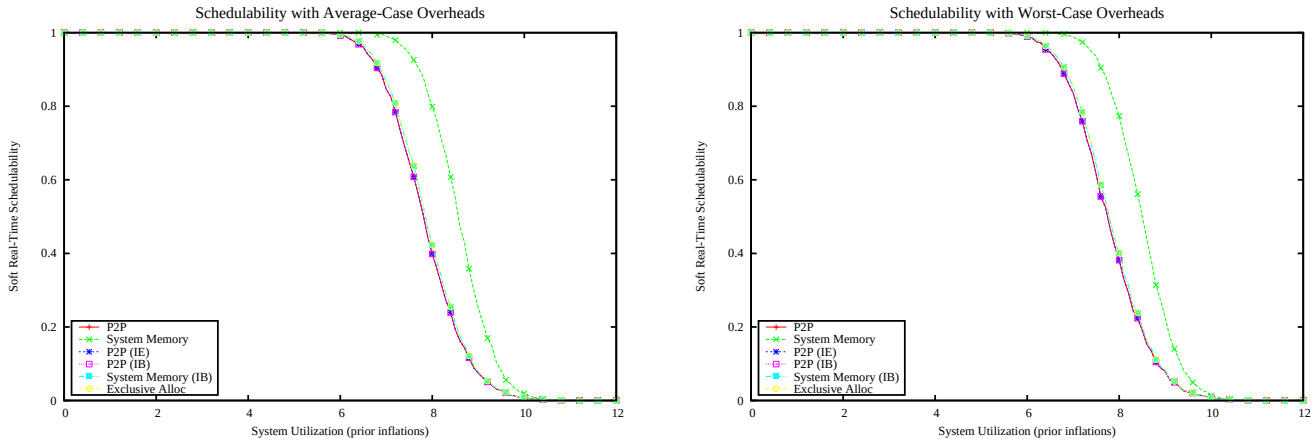

Figure 6206: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

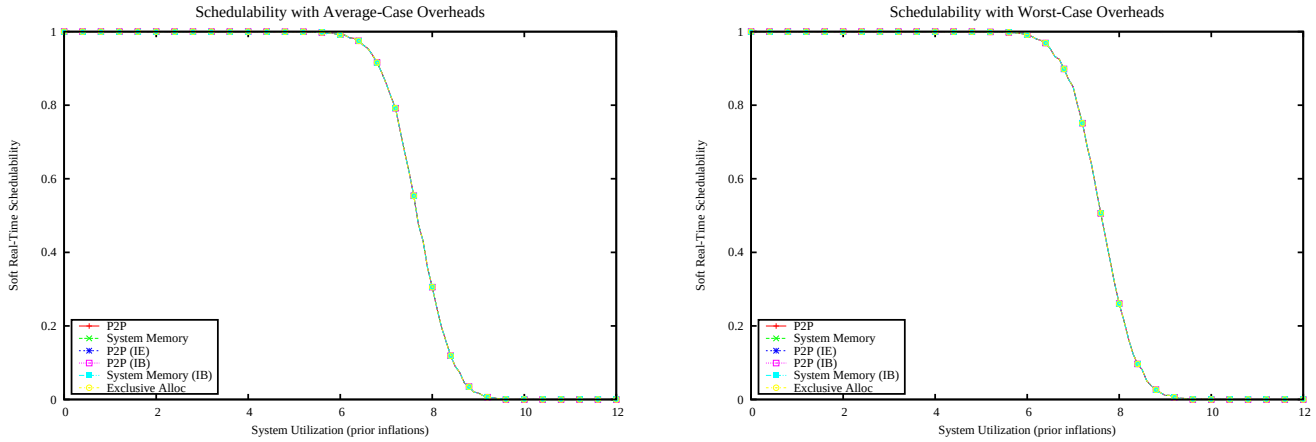

Figure 6207: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

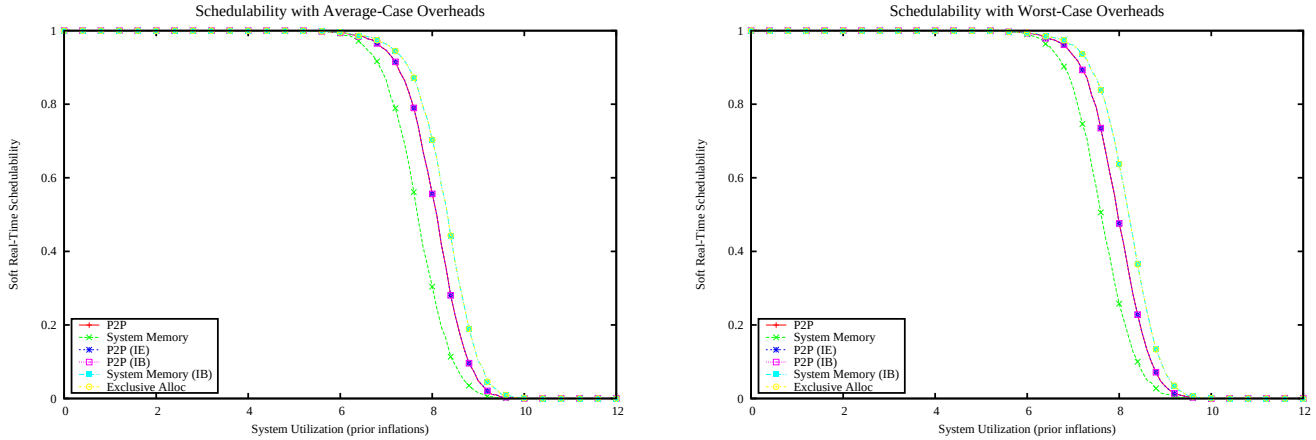

Figure 6208: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

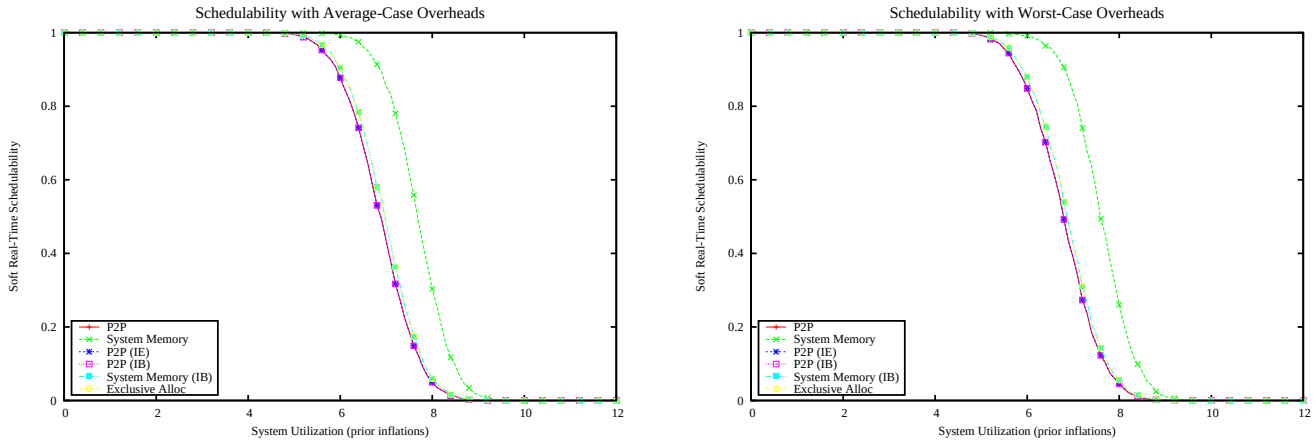

Figure 6209: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

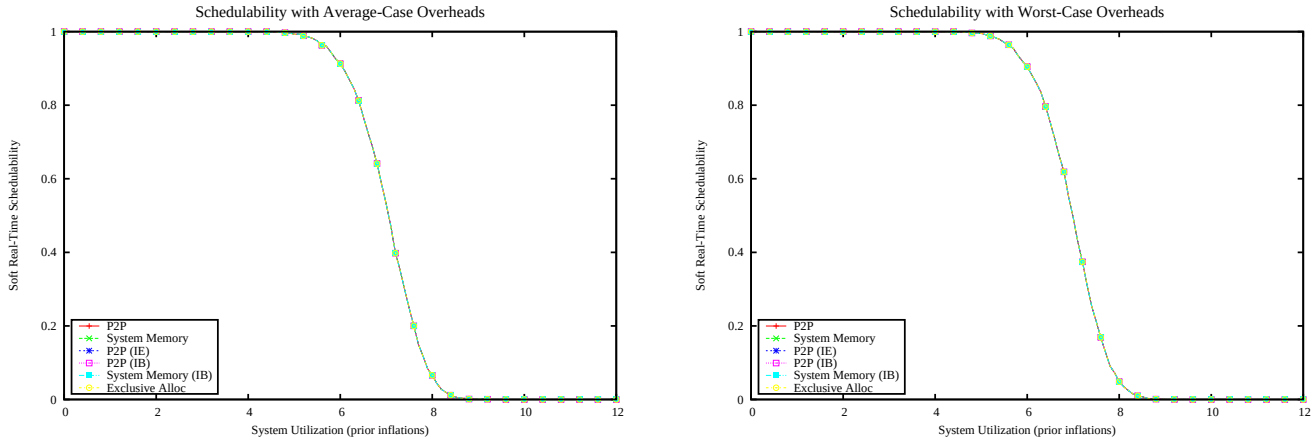

Figure 6210: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

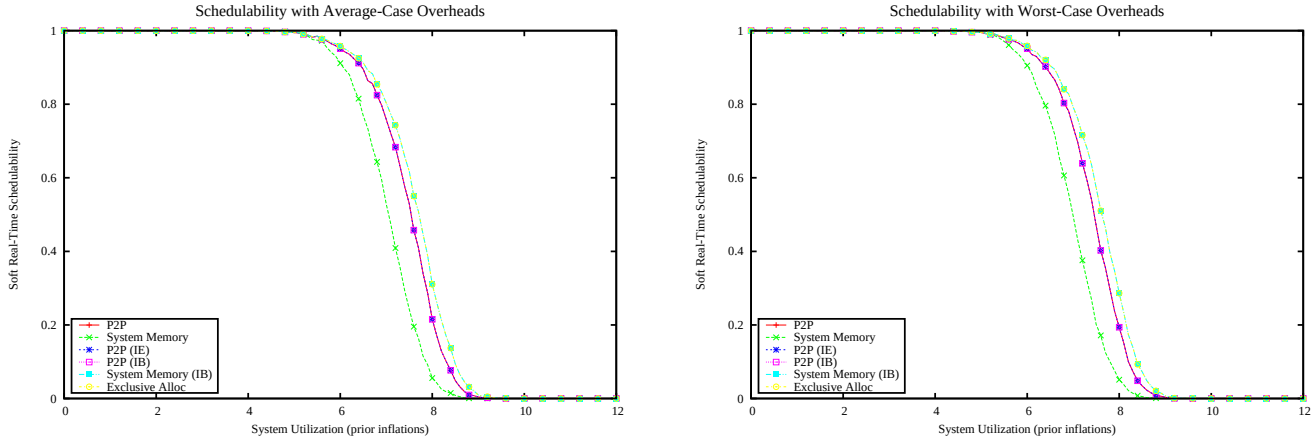

Figure 6211: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

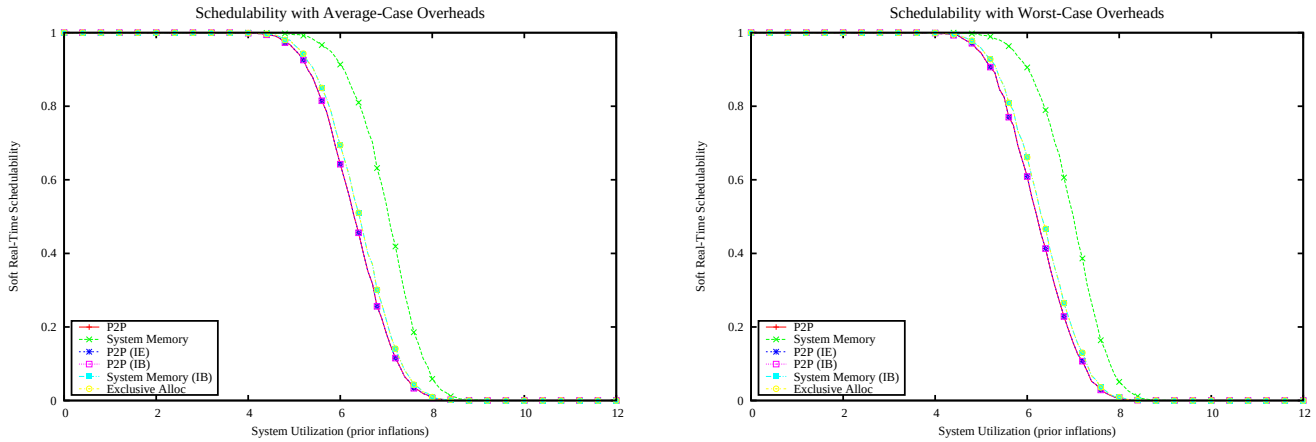

Figure 6212: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

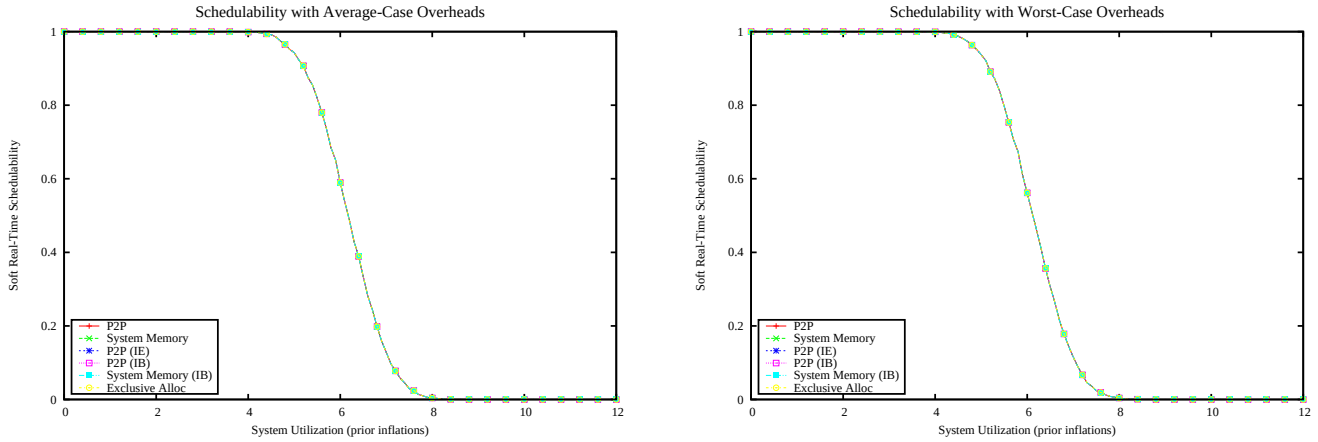

Figure 6213: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

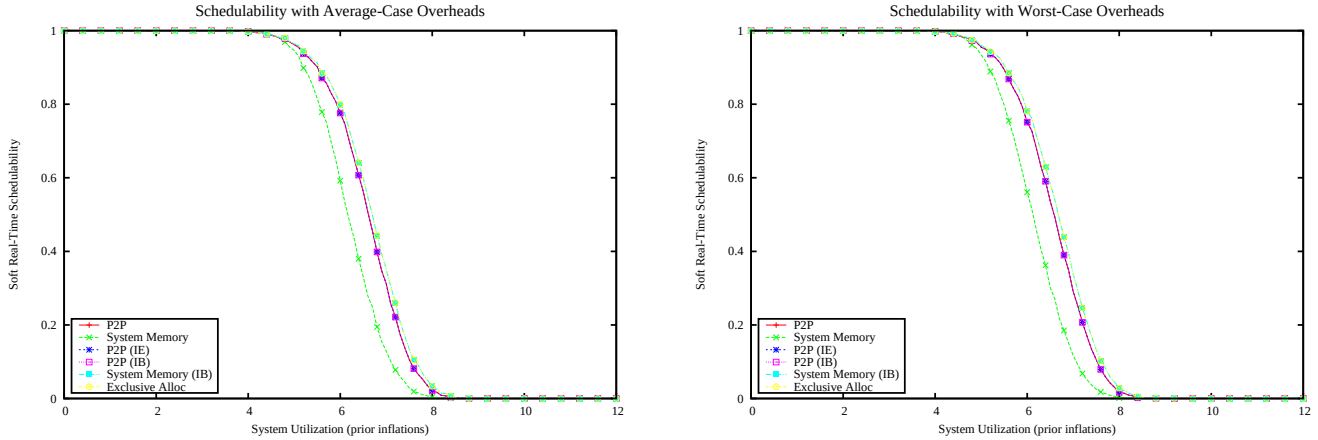

Figure 6214: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

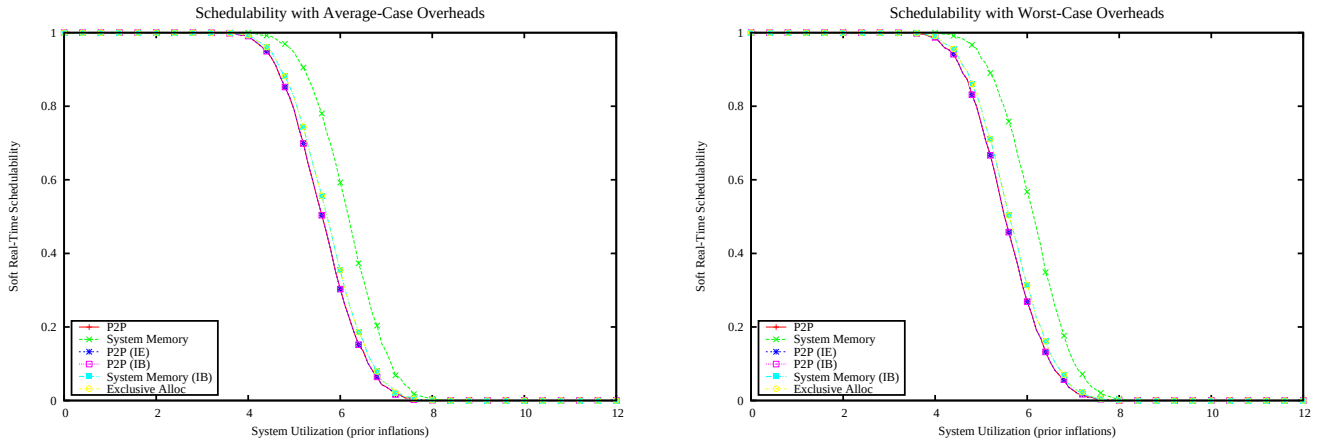

Figure 6215: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

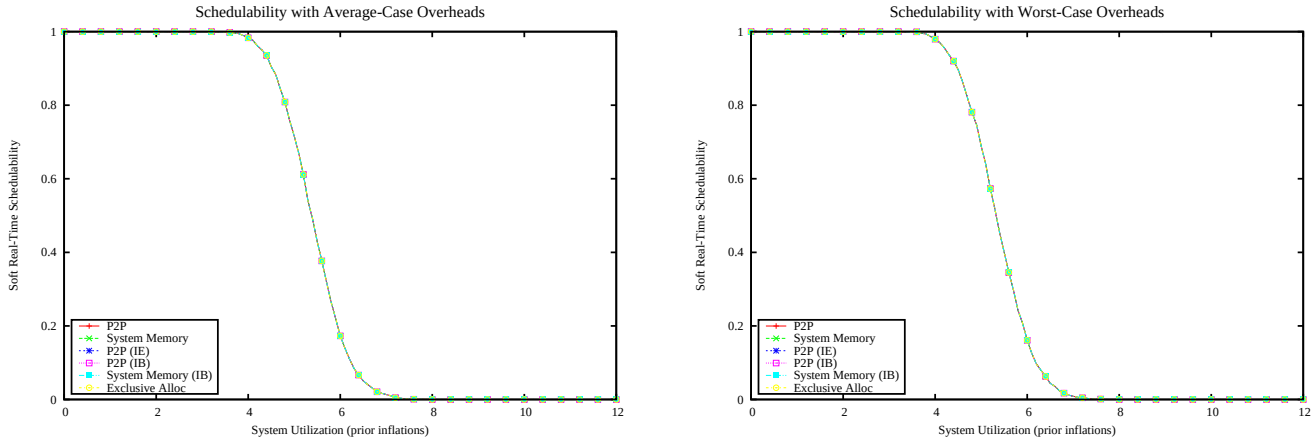

Figure 6216: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

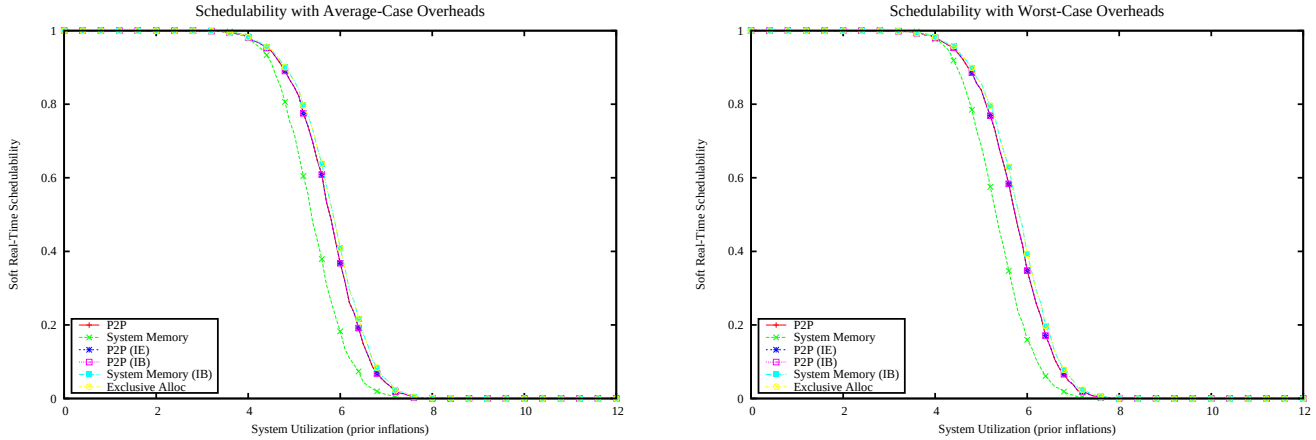

Figure 6217: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

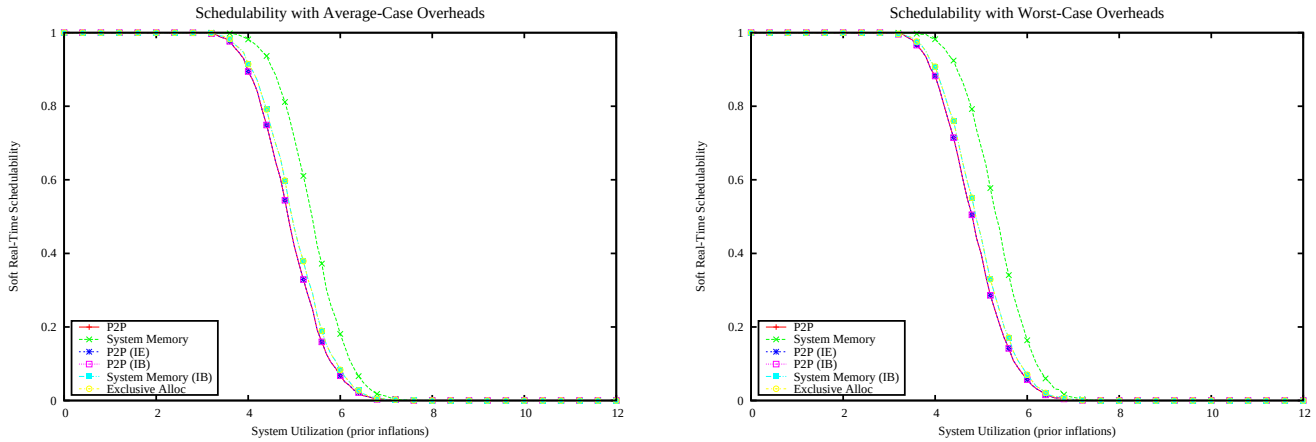

Figure 6218: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

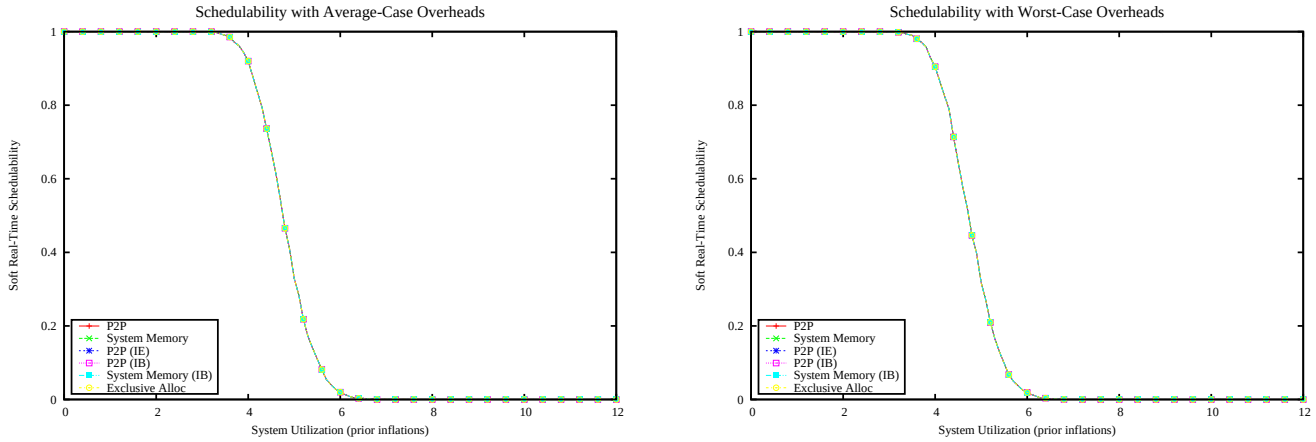

Figure 6219: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

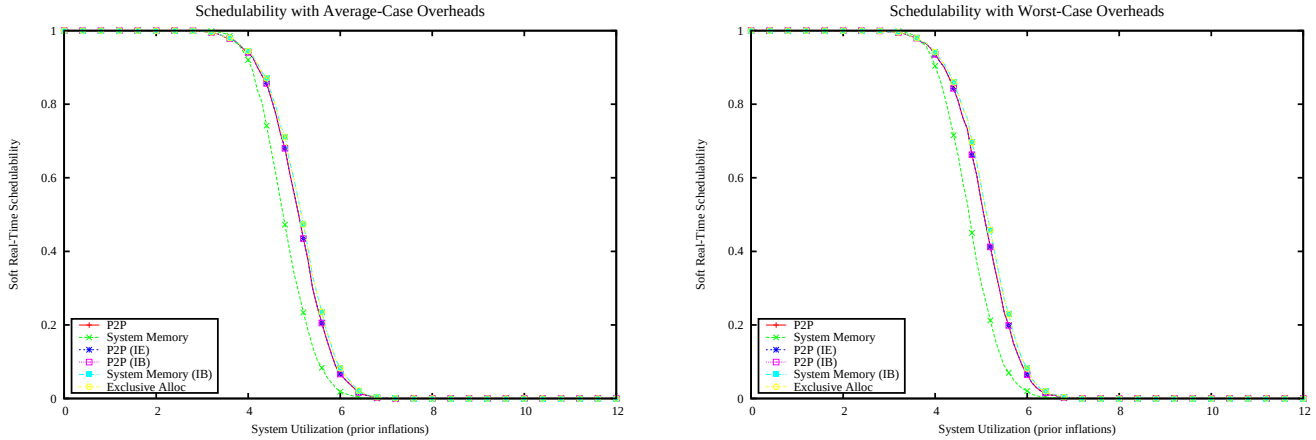

Figure 6220: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

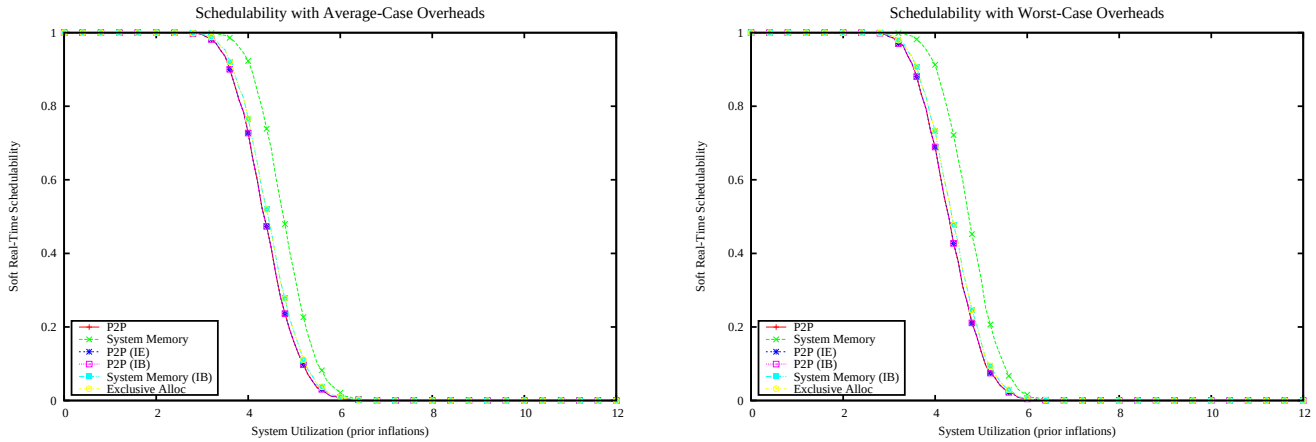

Figure 6221: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

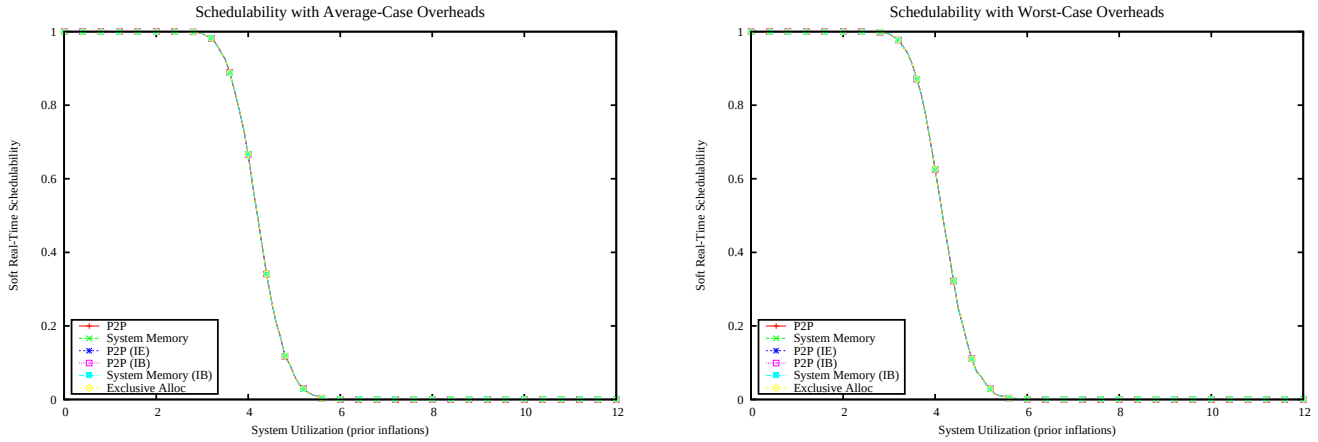

Figure 6222: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

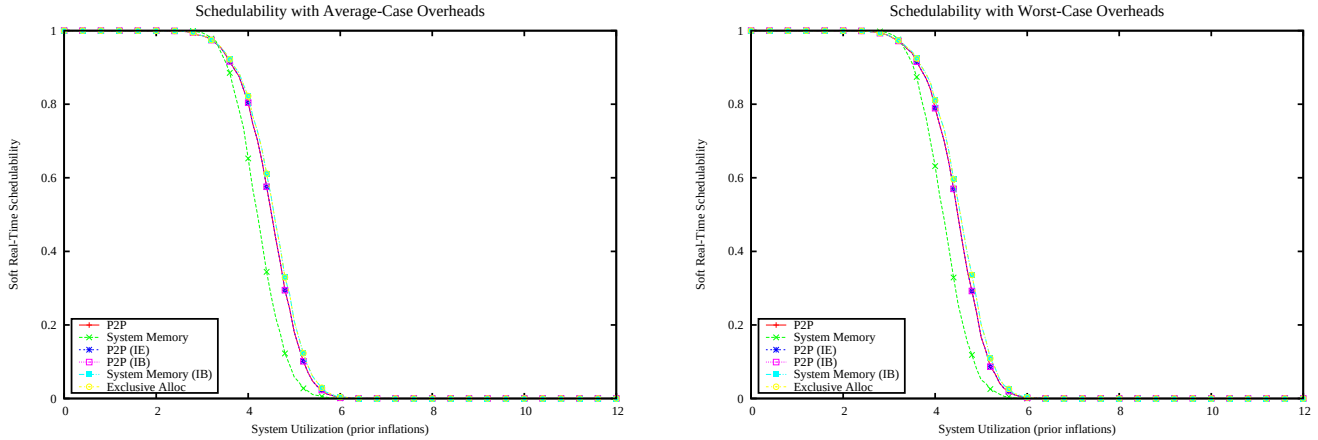

Figure 6223: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

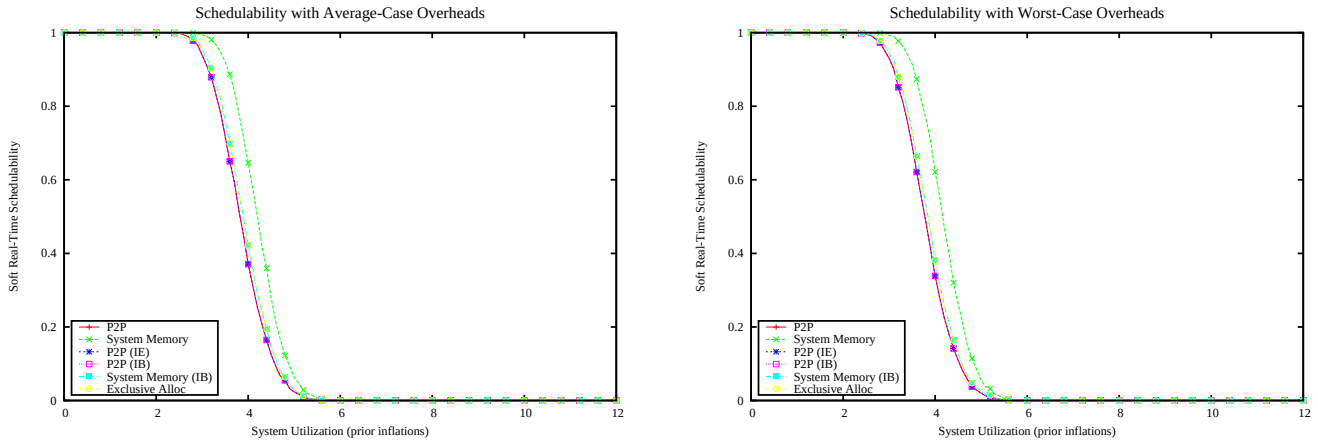

Figure 6224: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

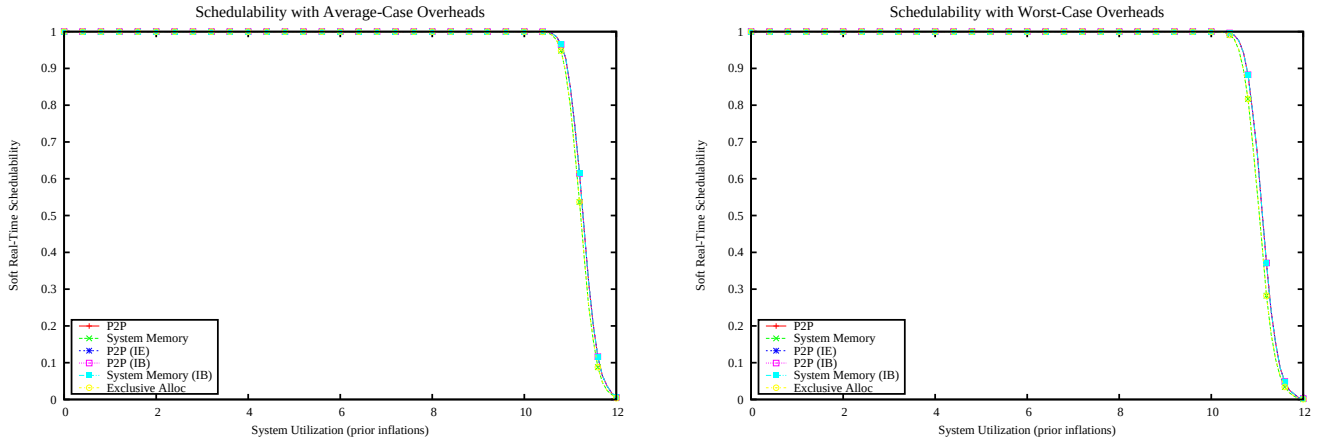

Figure 6225: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

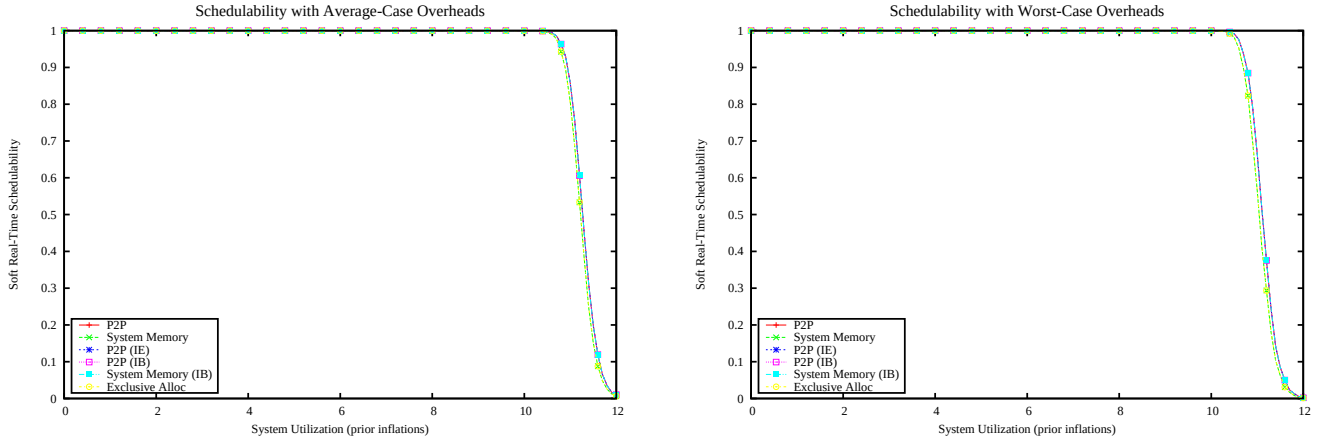

Figure 6226: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

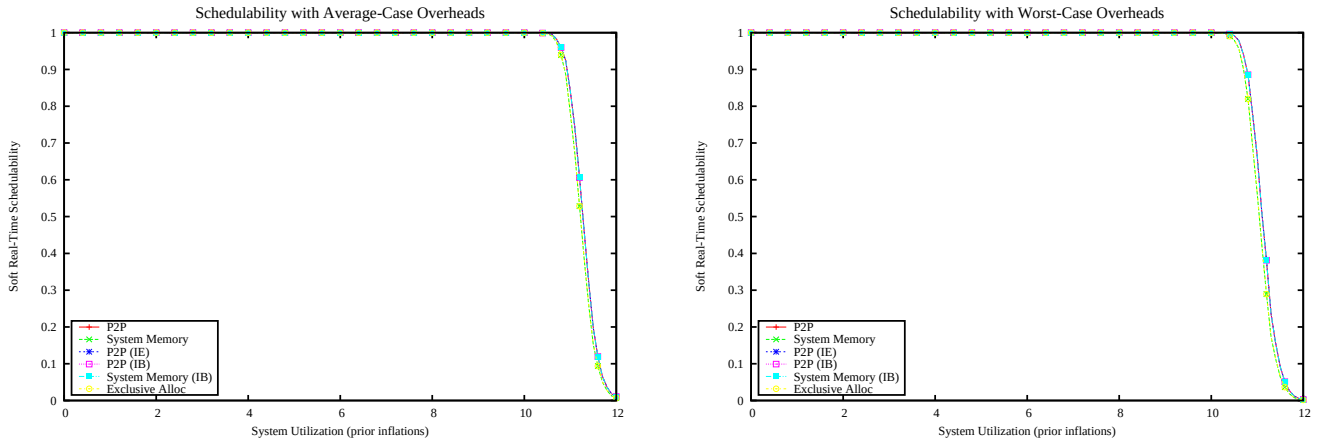

Figure 6227: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

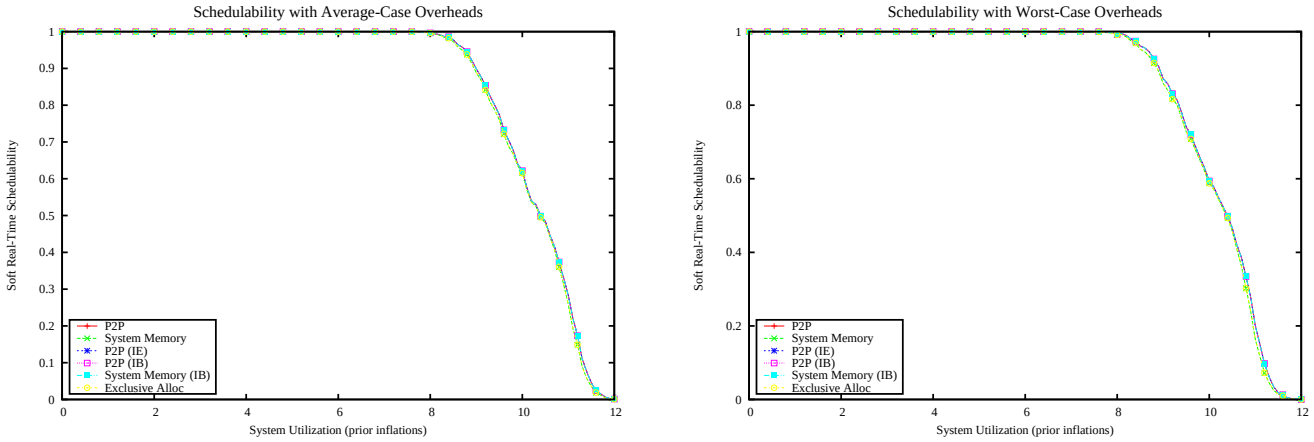

Figure 6228: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

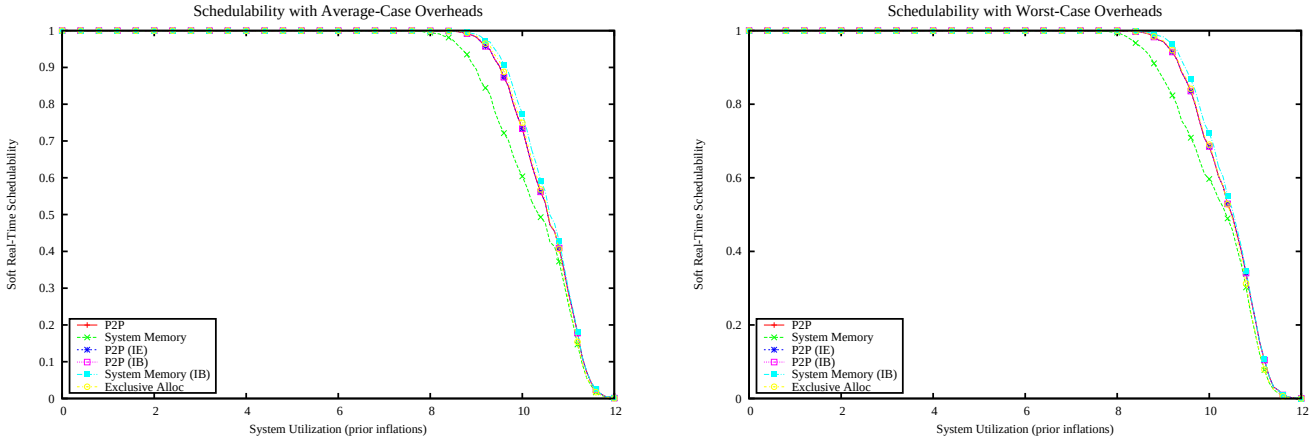

Figure 6229: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

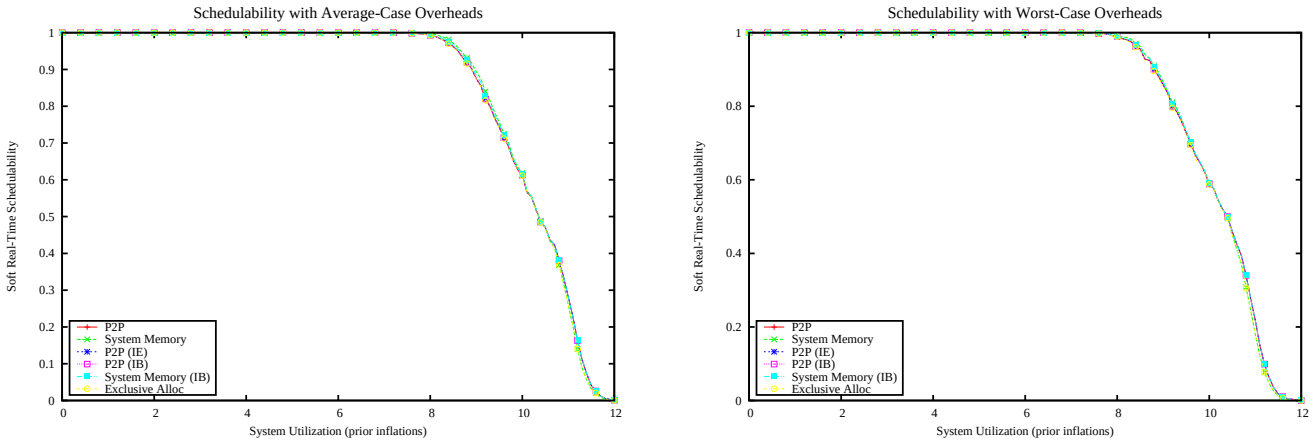

Figure 6230: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

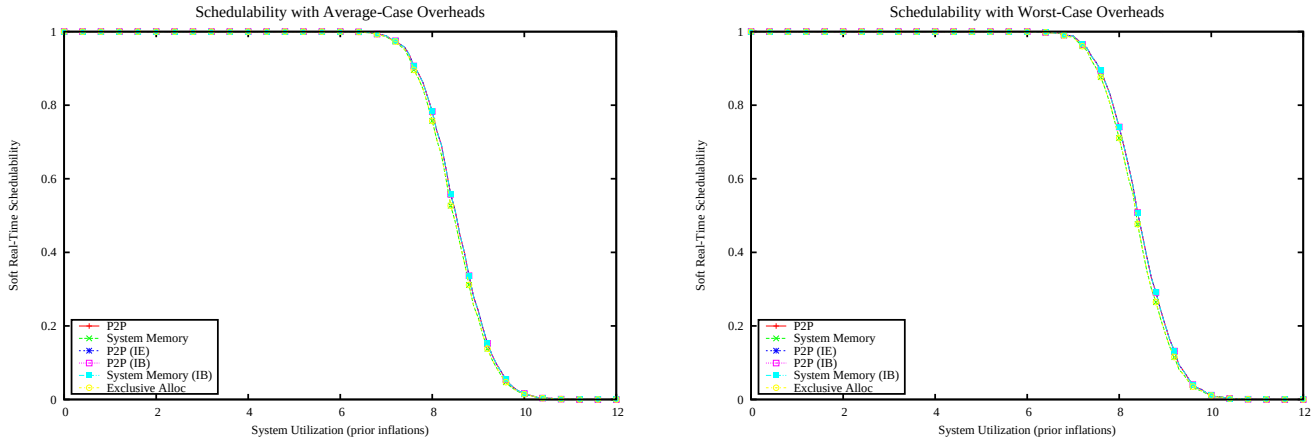

Figure 6231: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

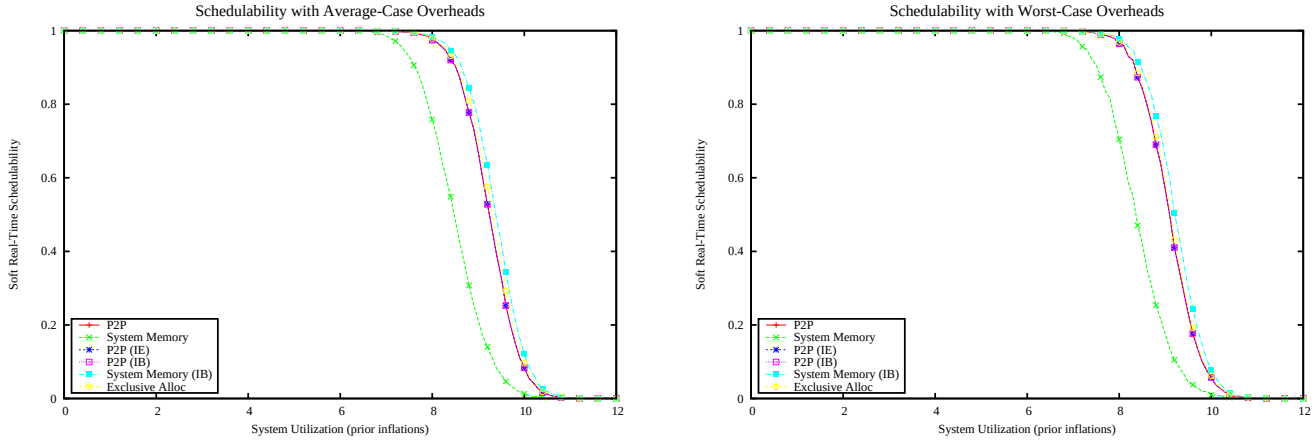

Figure 6232: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

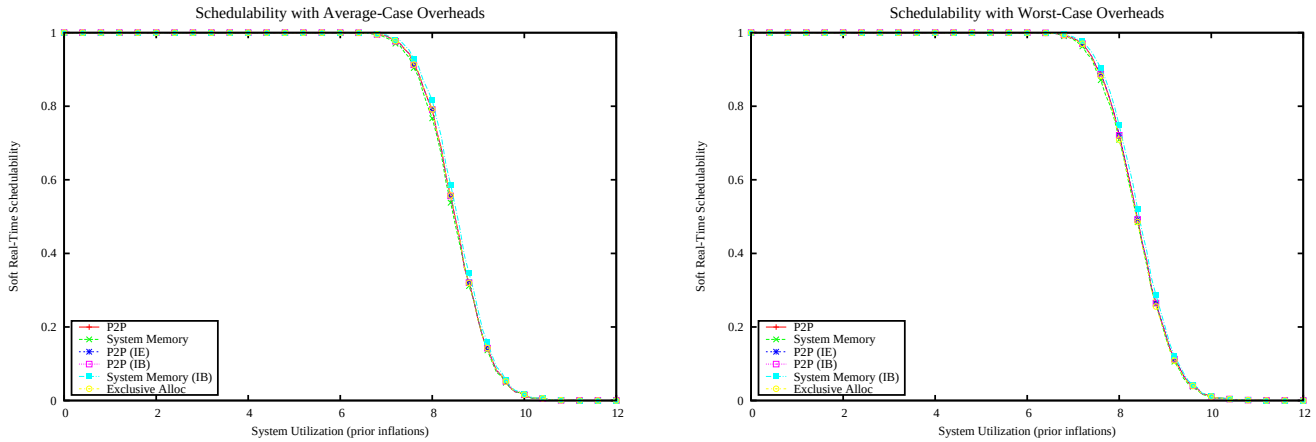

Figure 6233: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

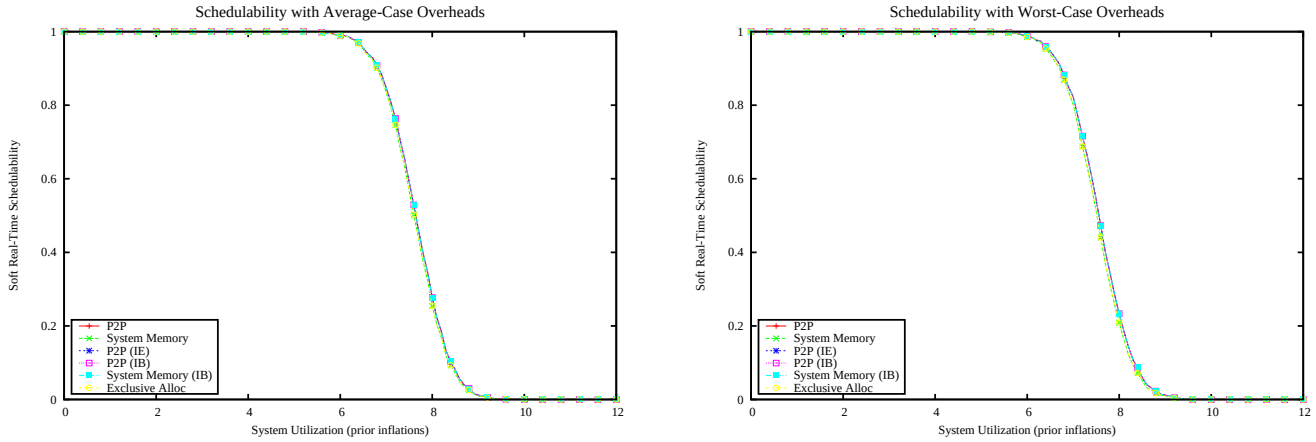

Figure 6234: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

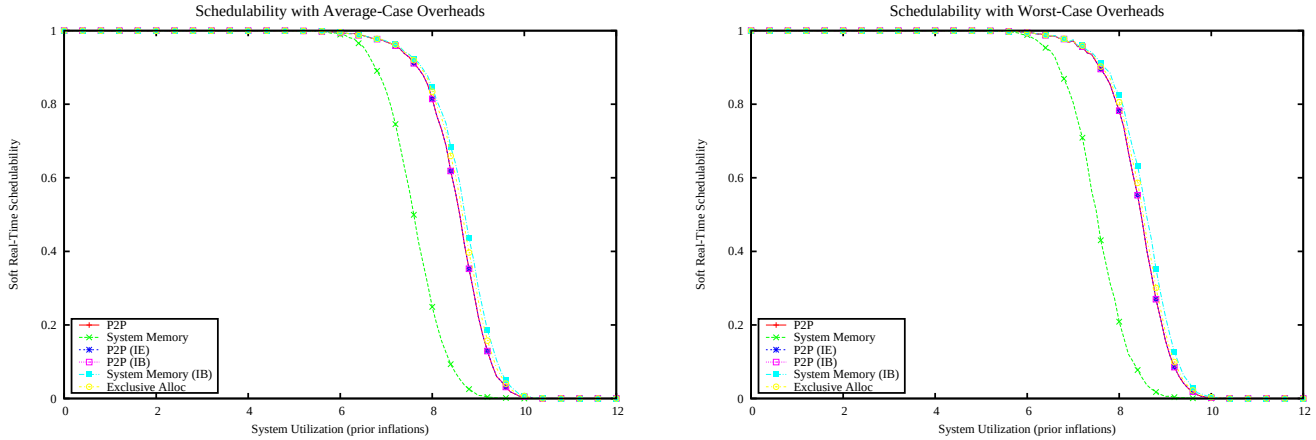

Figure 6235: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

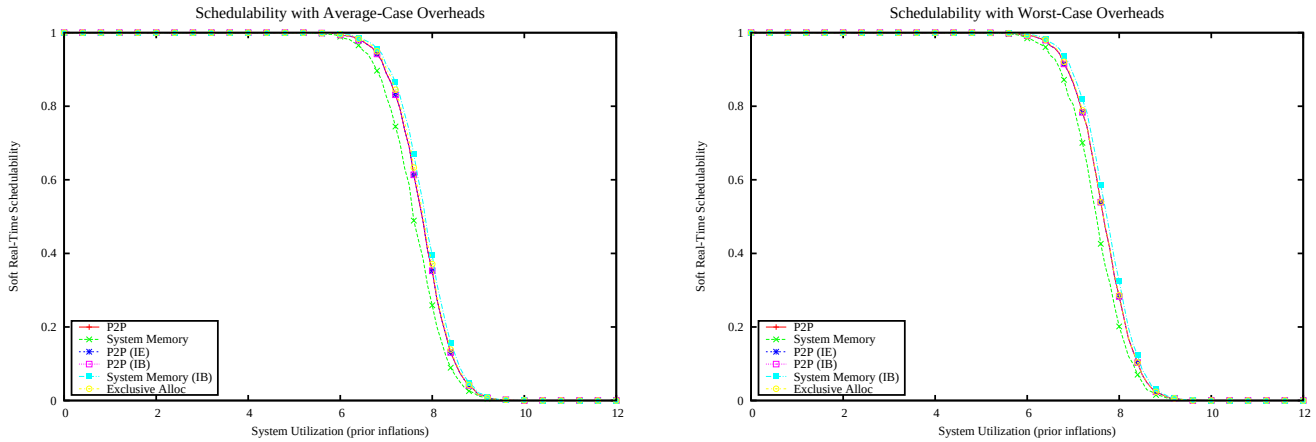

Figure 6236: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

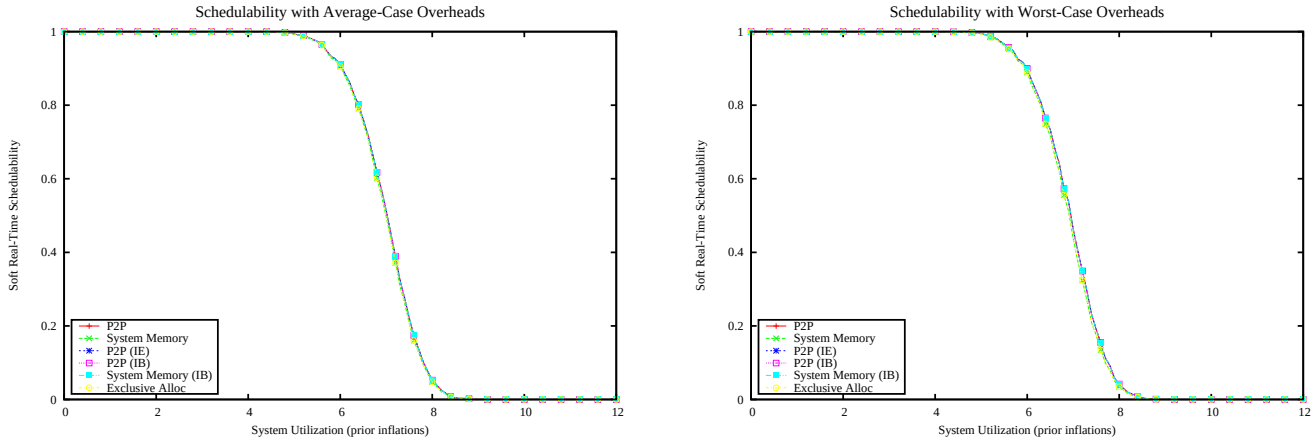

Figure 6237: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

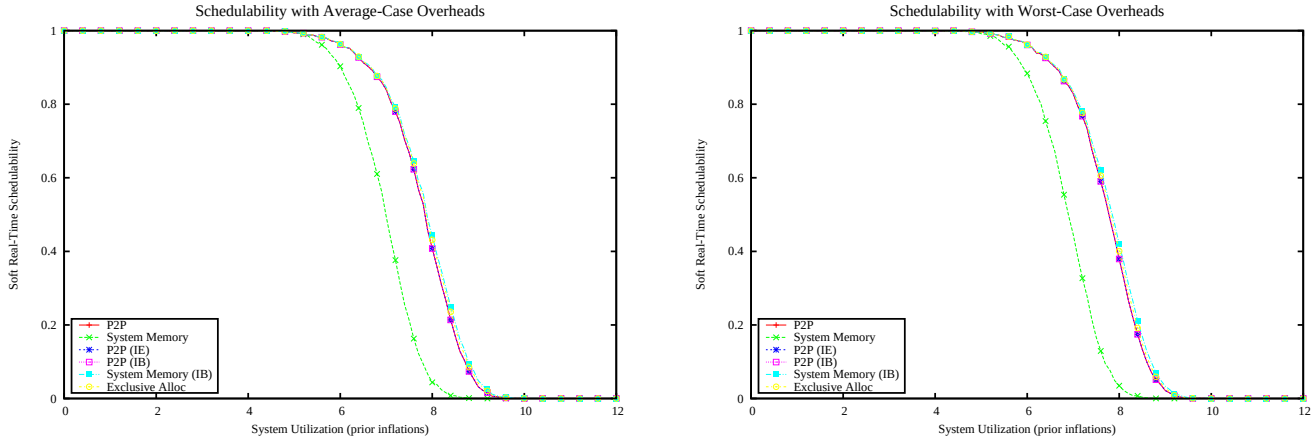

Figure 6238: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

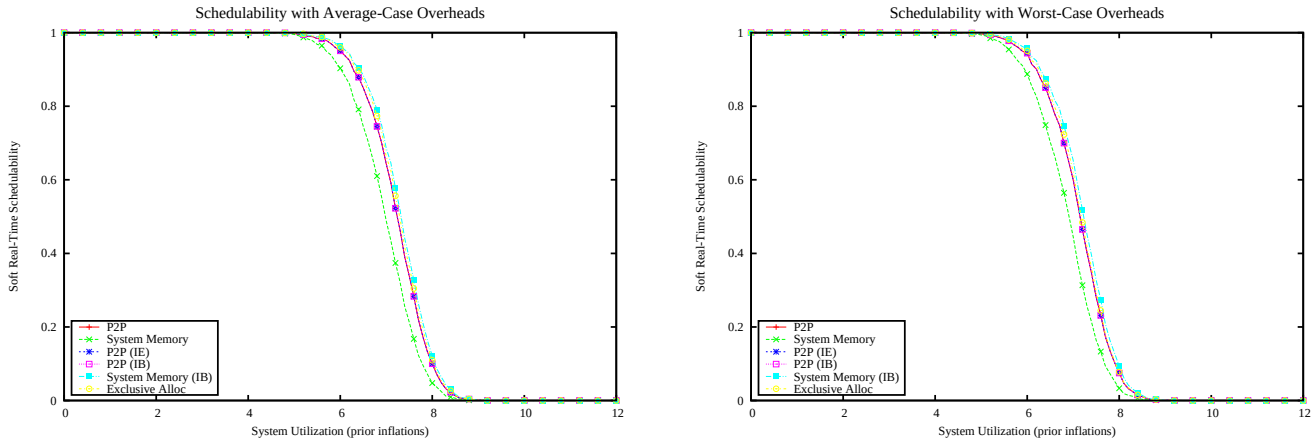

Figure 6239: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

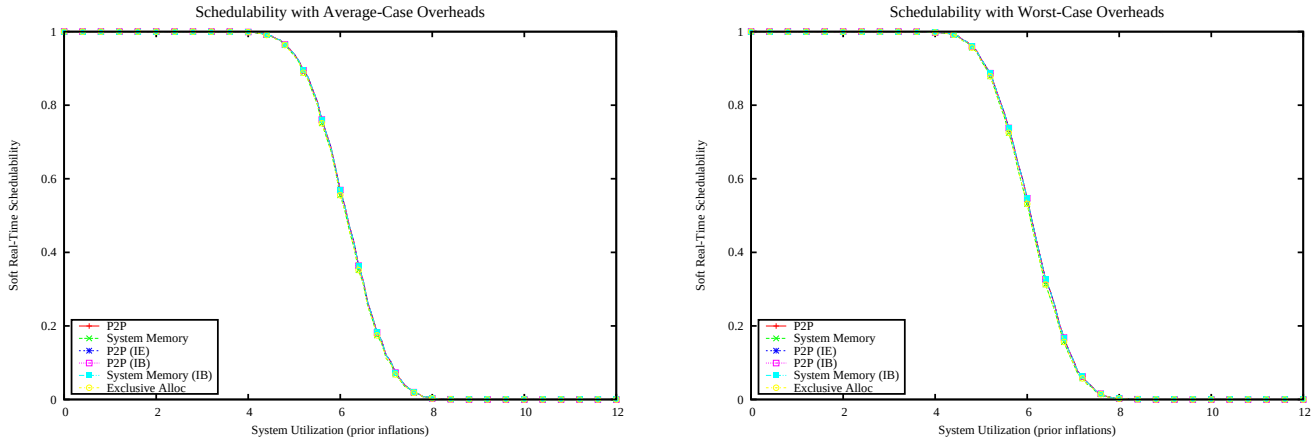

Figure 6240: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

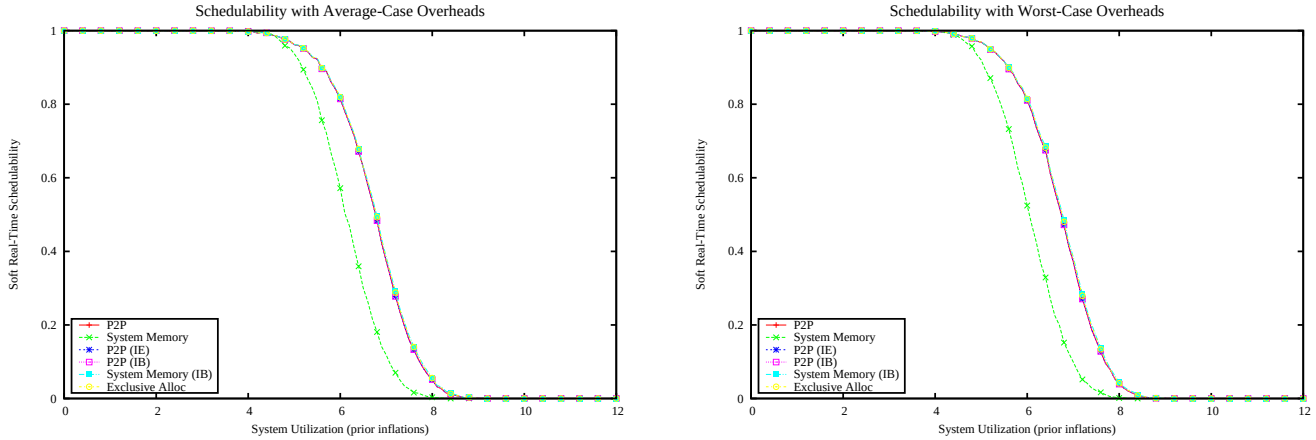

Figure 6241: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

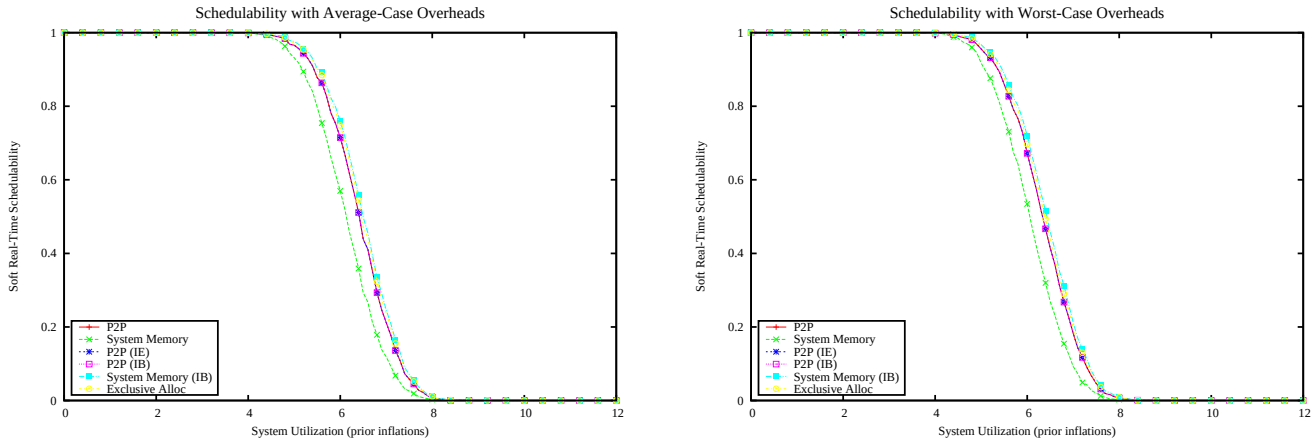

Figure 6242: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

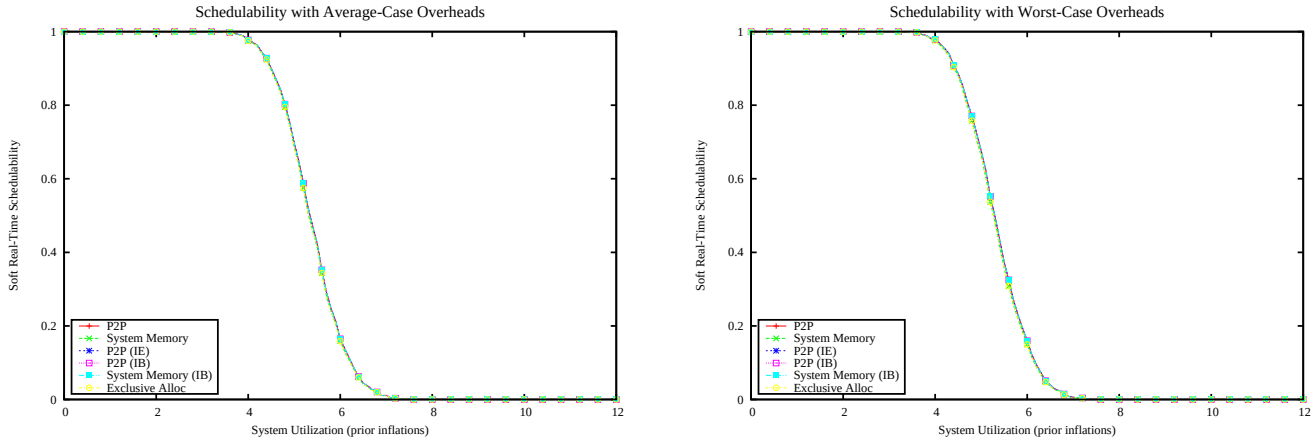

Figure 6243: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

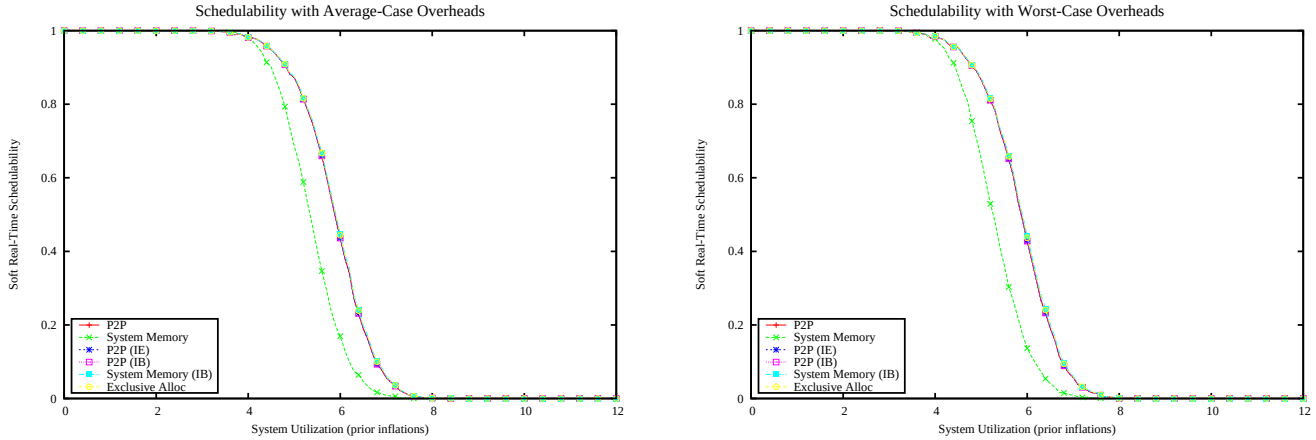

Figure 6244: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

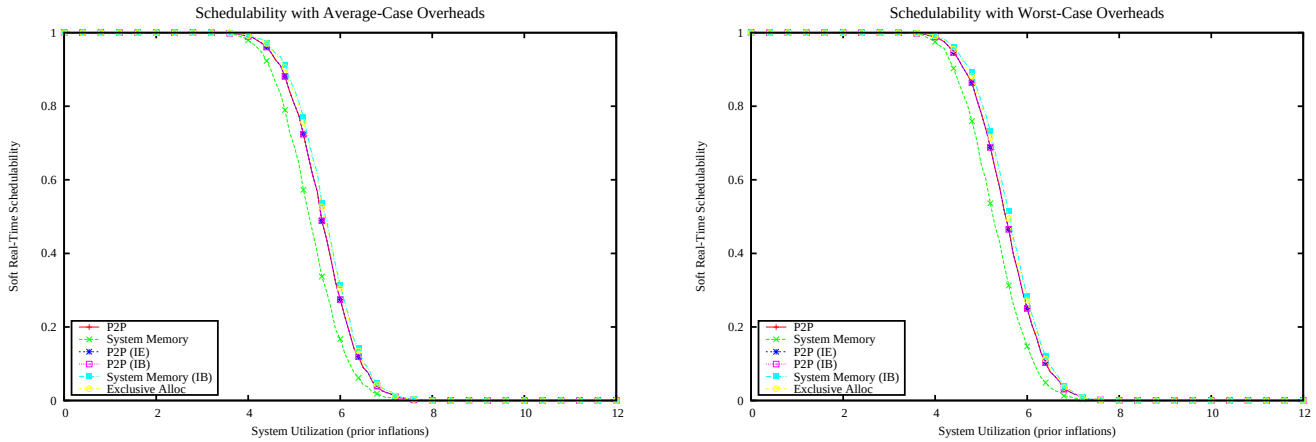

Figure 6245: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

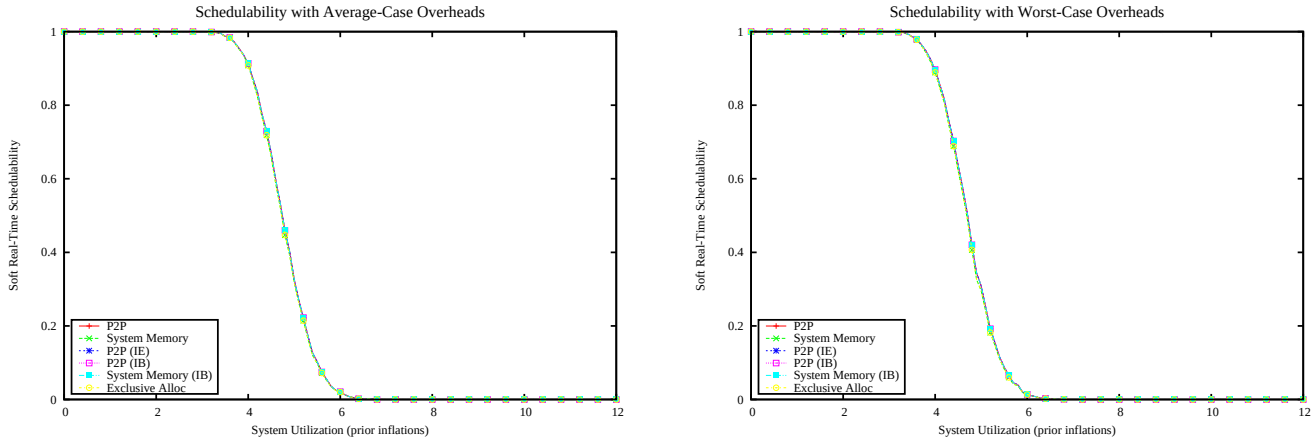

Figure 6246: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

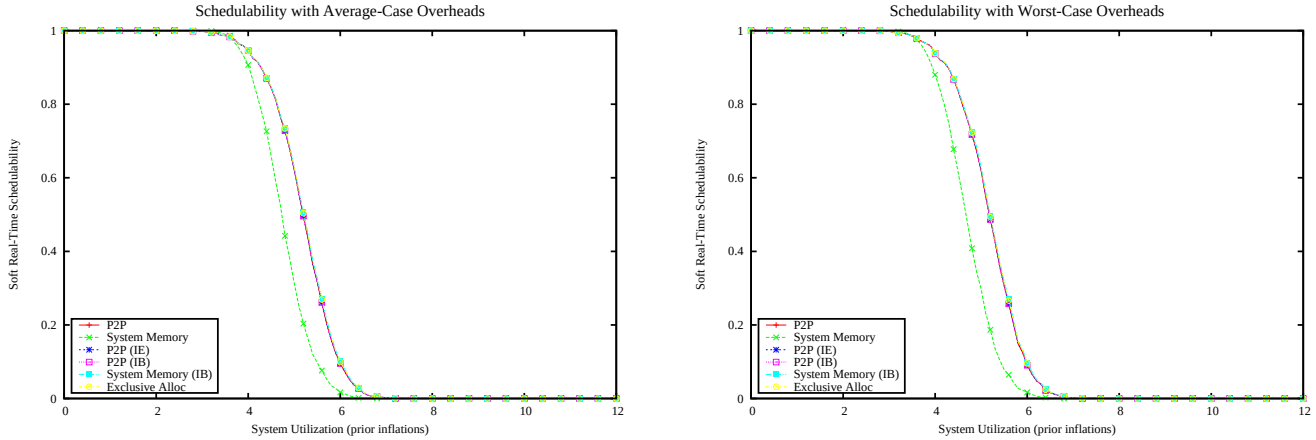

Figure 6247: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

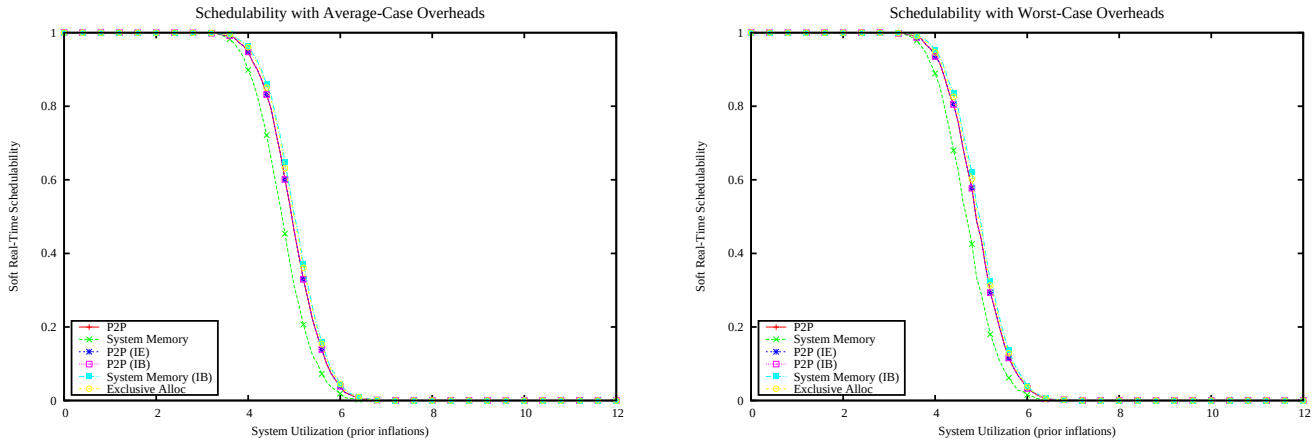

Figure 6248: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

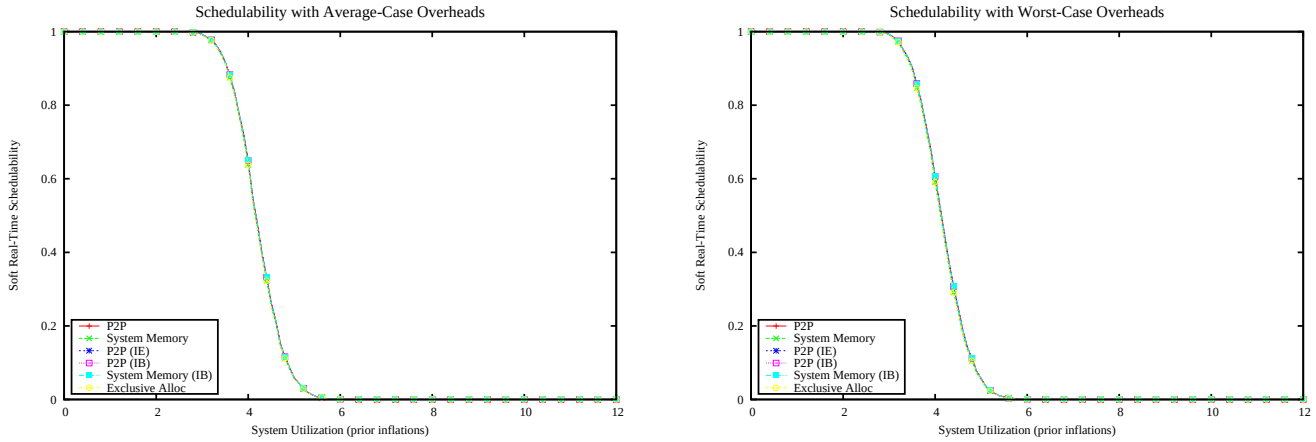

Figure 6249: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

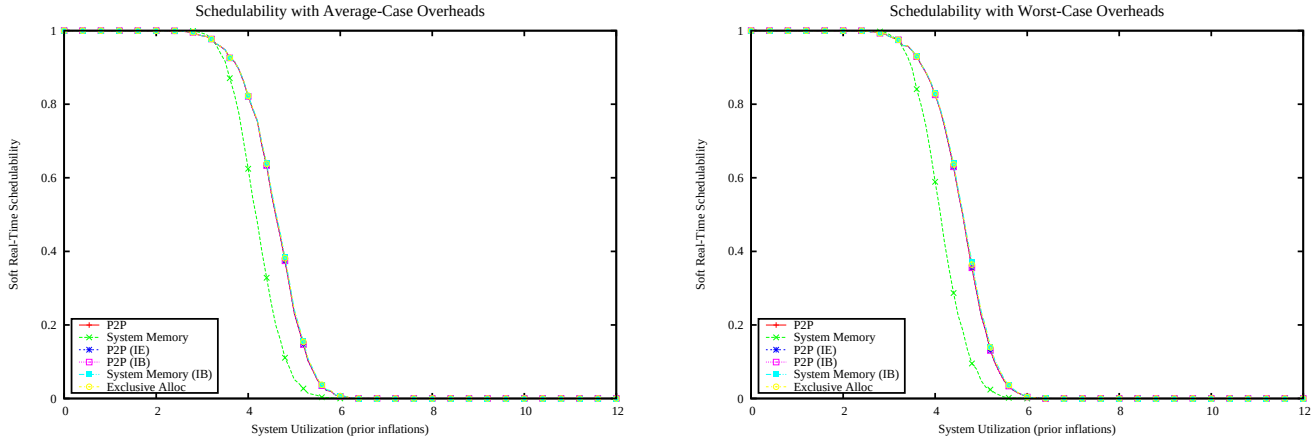

Figure 6250: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

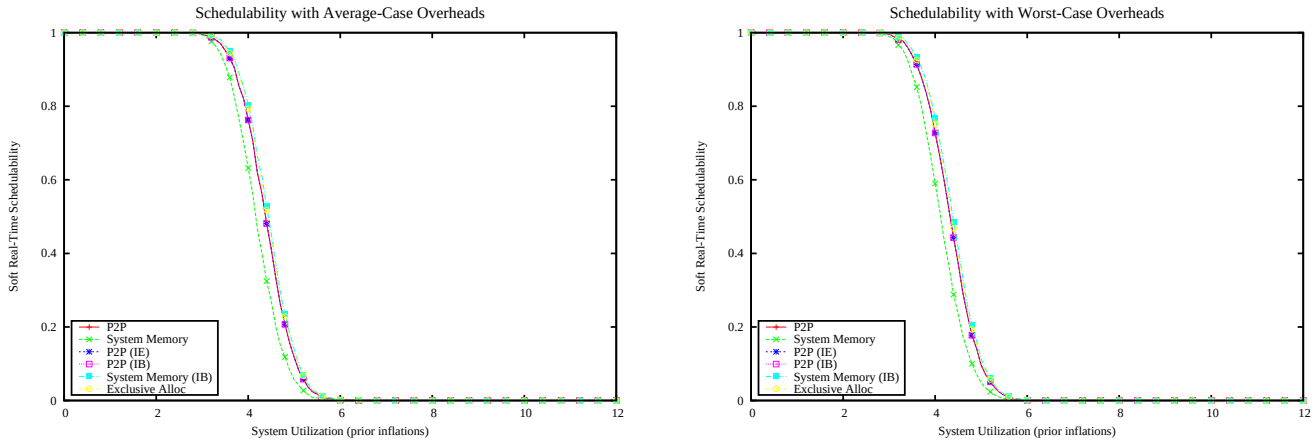

Figure 6251: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

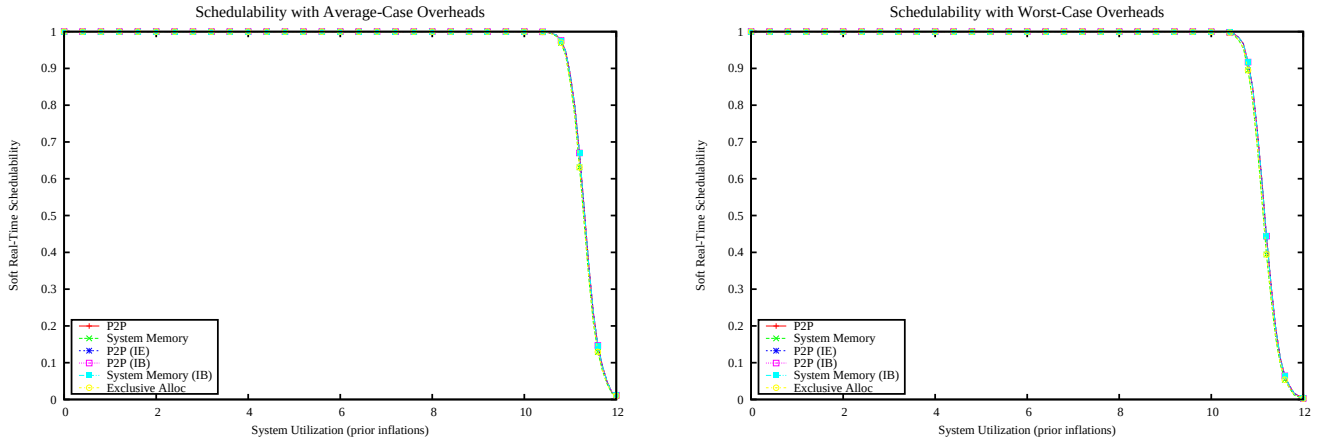

Figure 6252: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

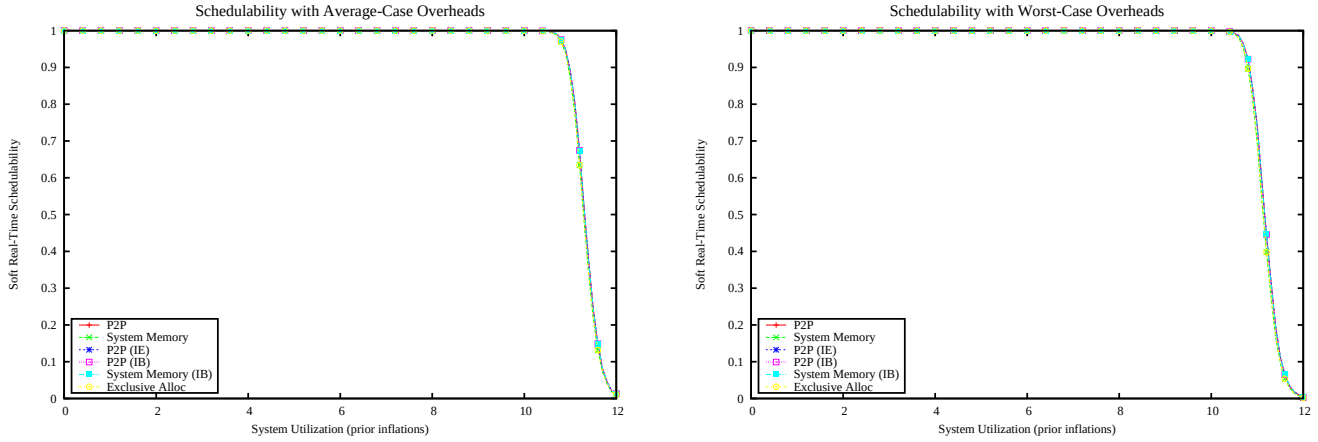

Figure 6253: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

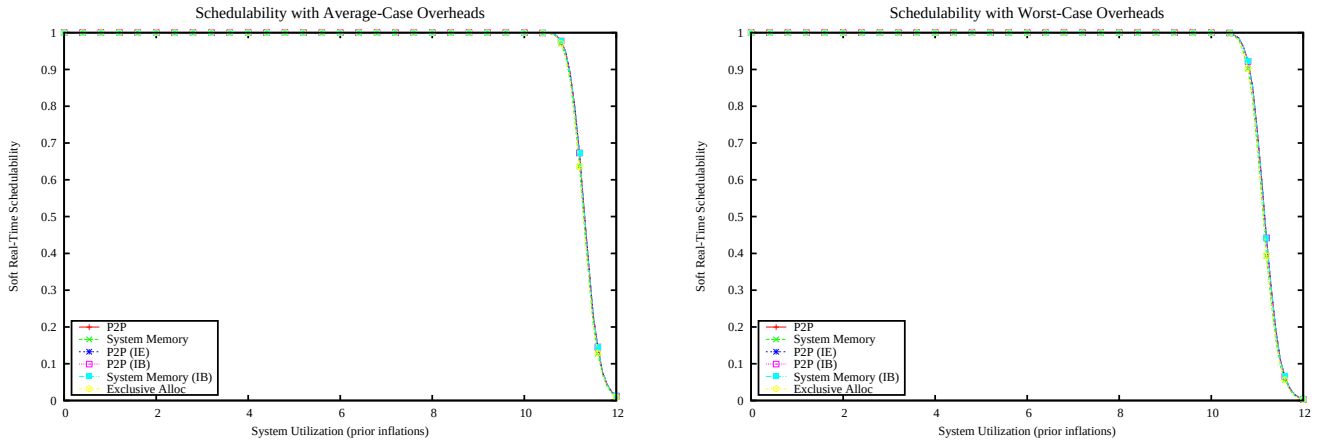

Figure 6254: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

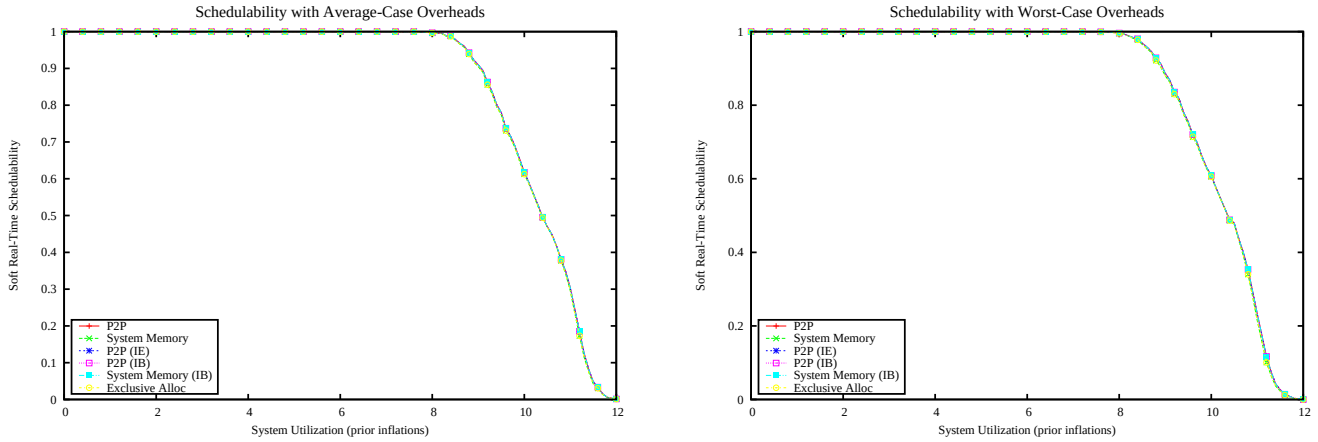

Figure 6255: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

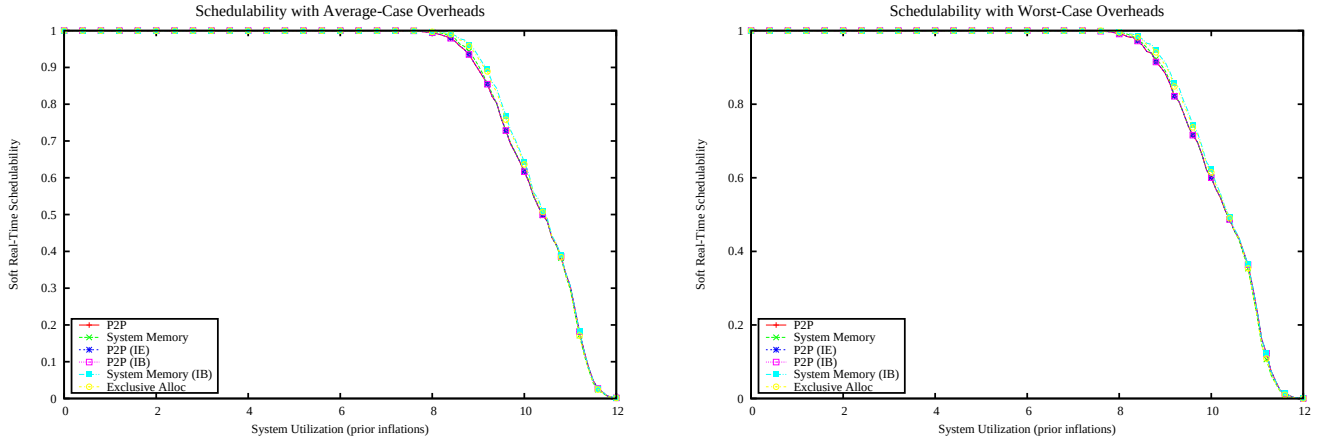

Figure 6256: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

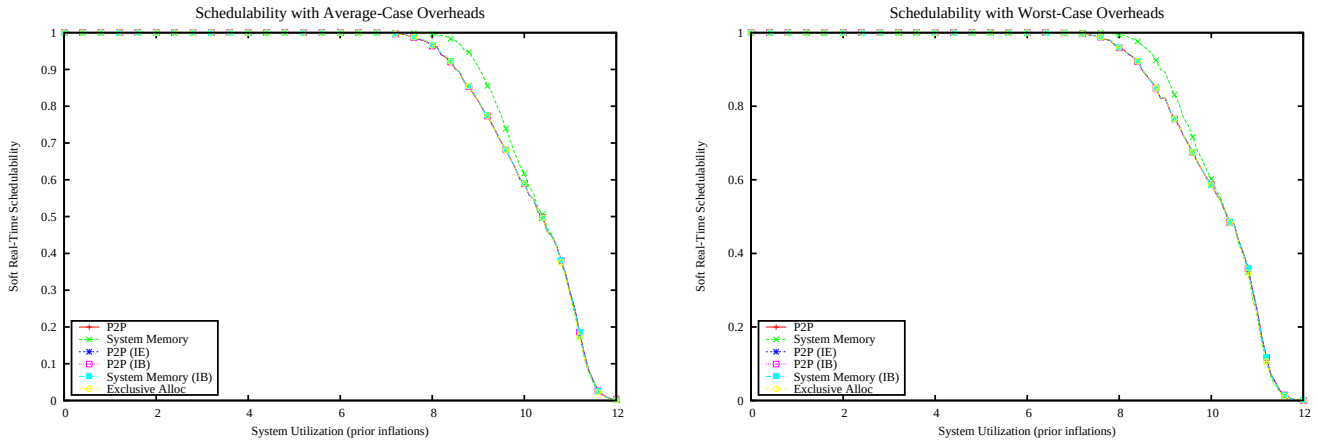

Figure 6257: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

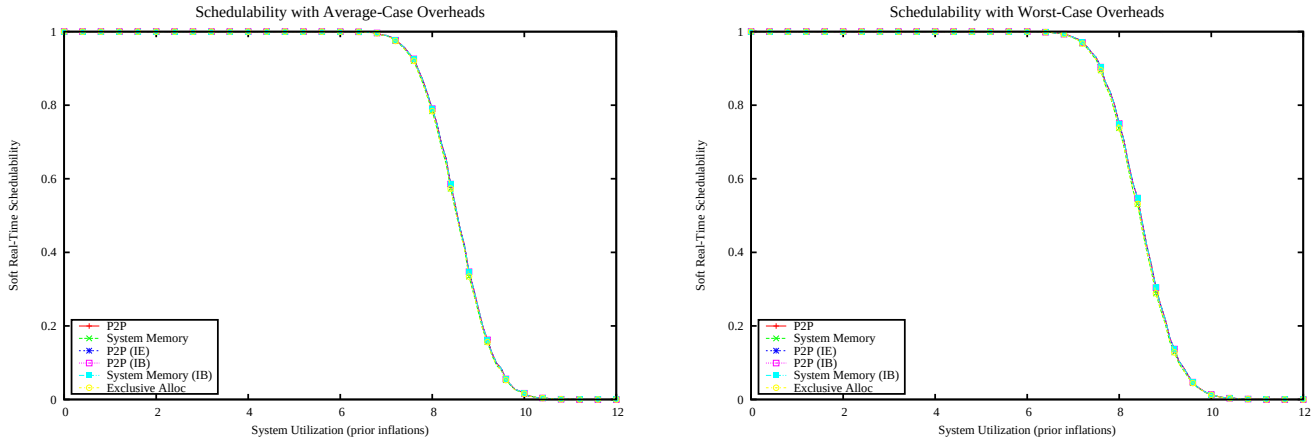

Figure 6258: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

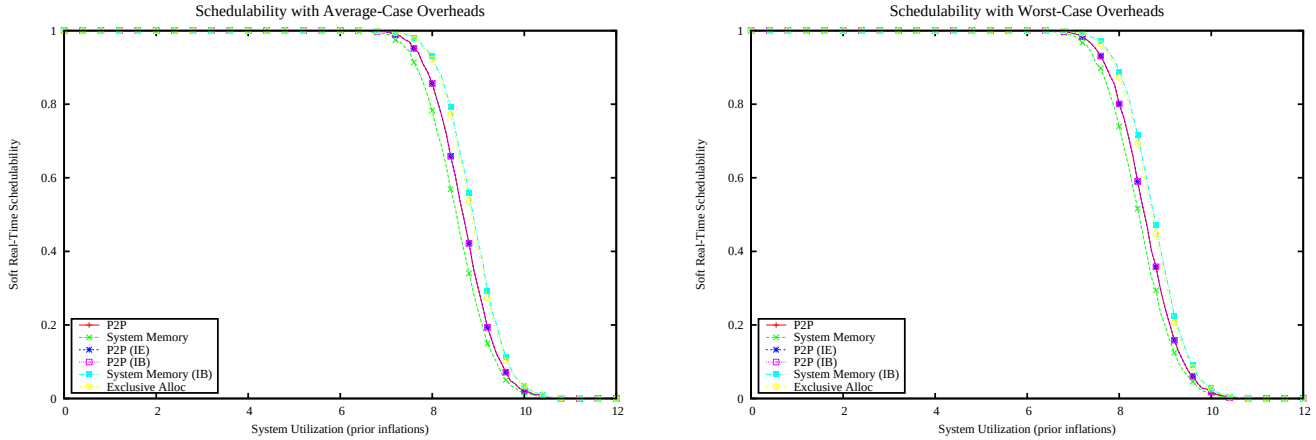

Figure 6259: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

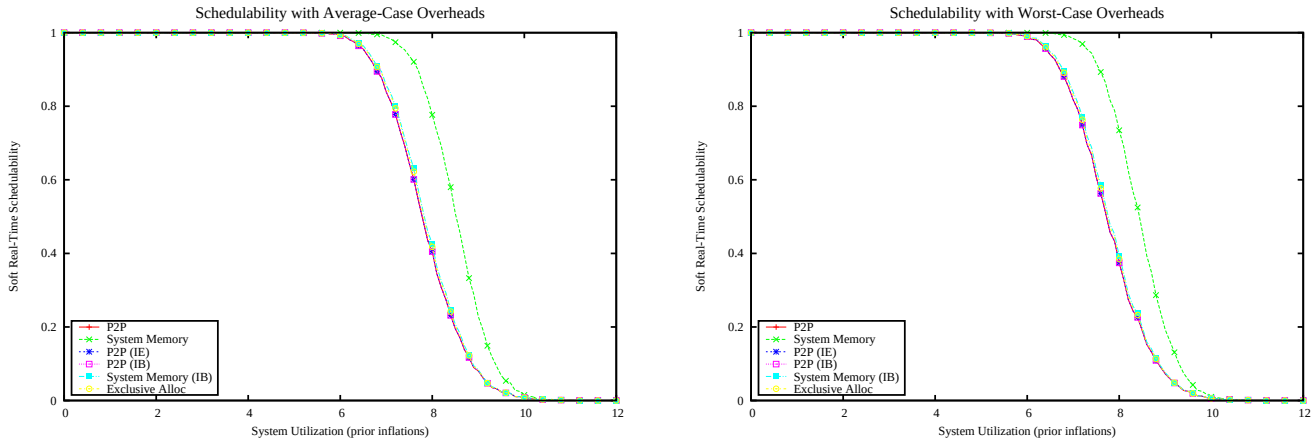

Figure 6260: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

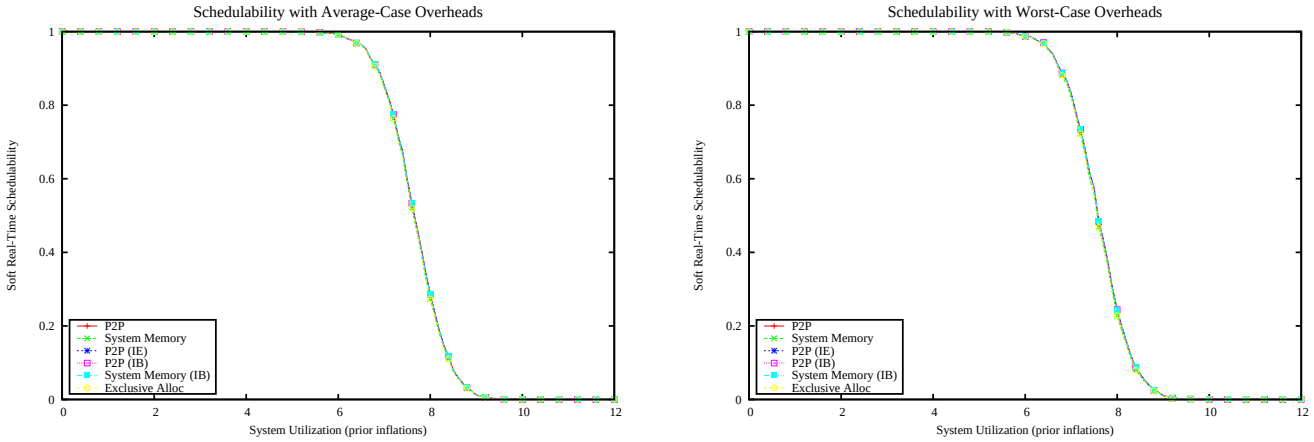

Figure 6261: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

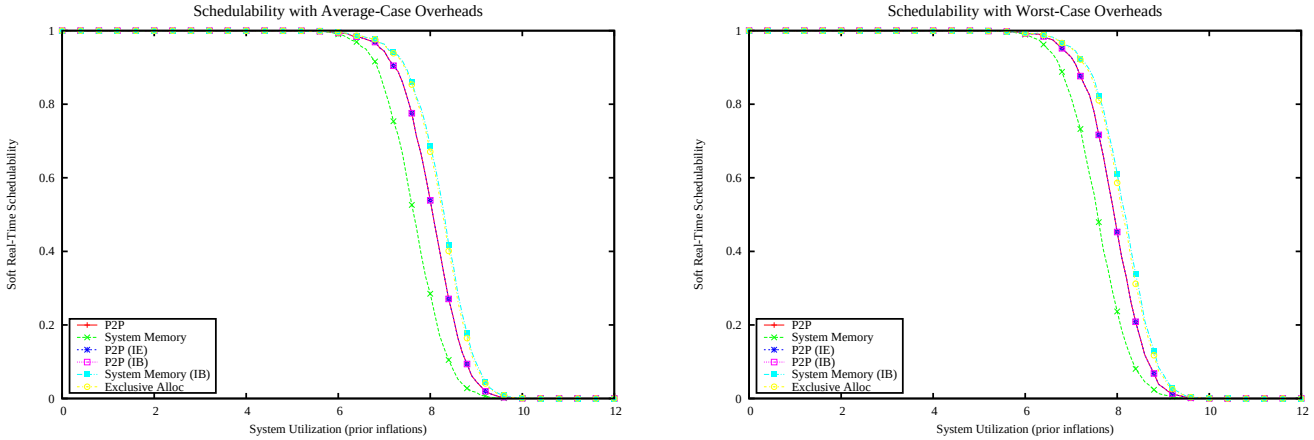

Figure 6262: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

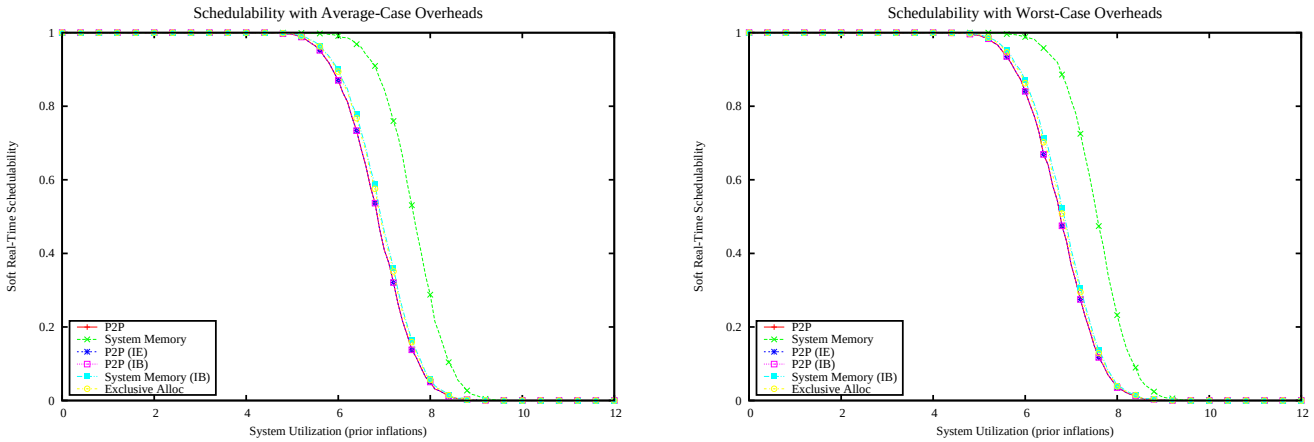

Figure 6263: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

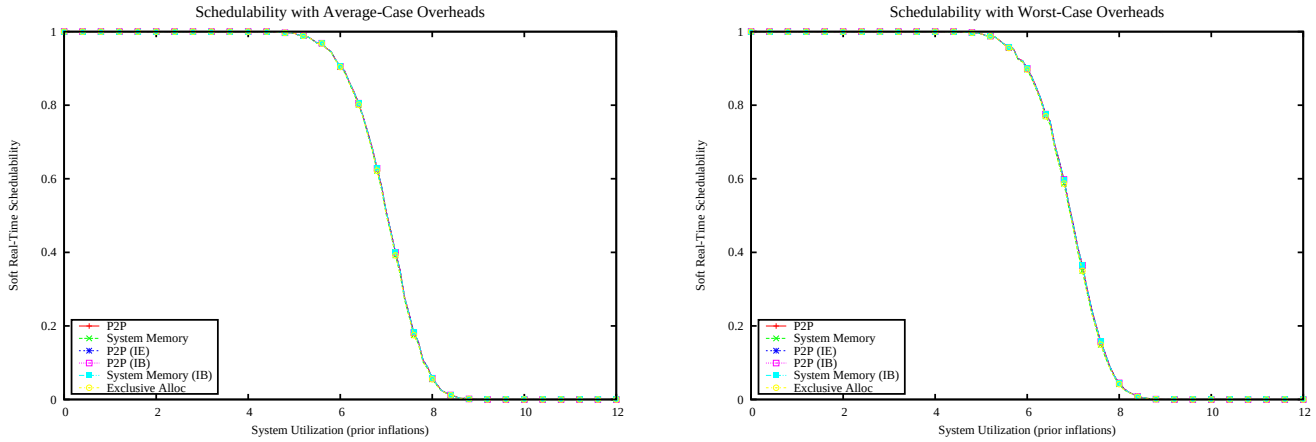

Figure 6264: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

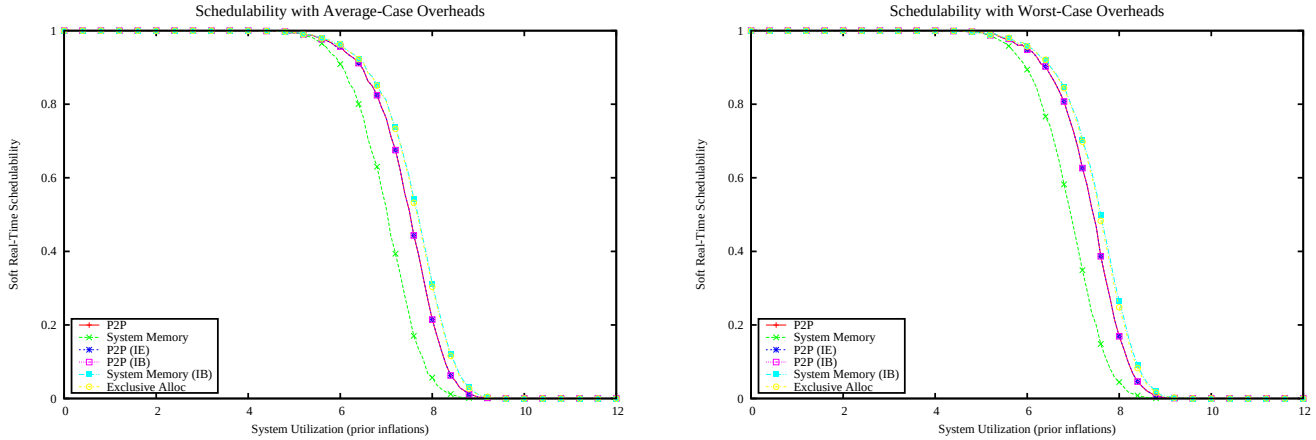

Figure 6265: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

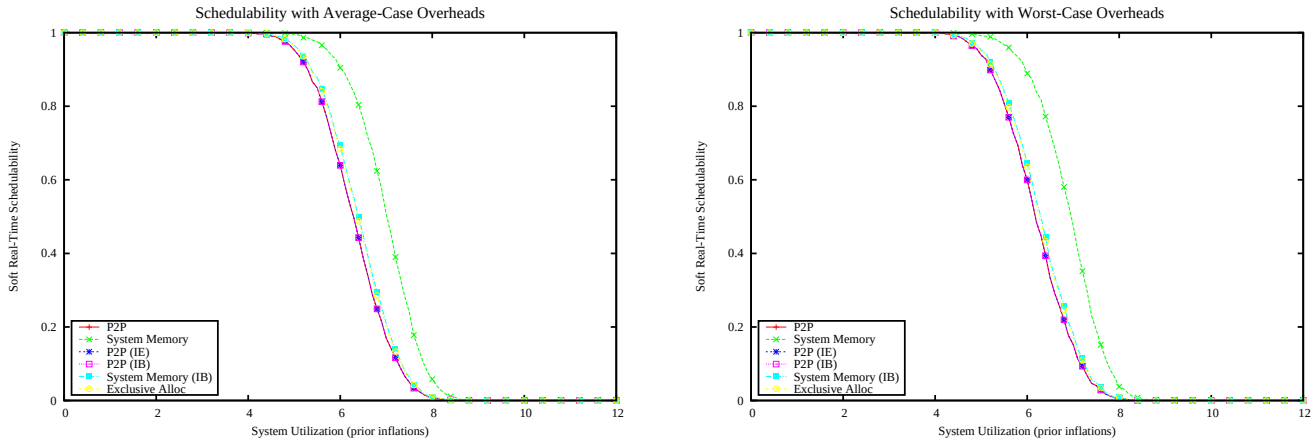

Figure 6266: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

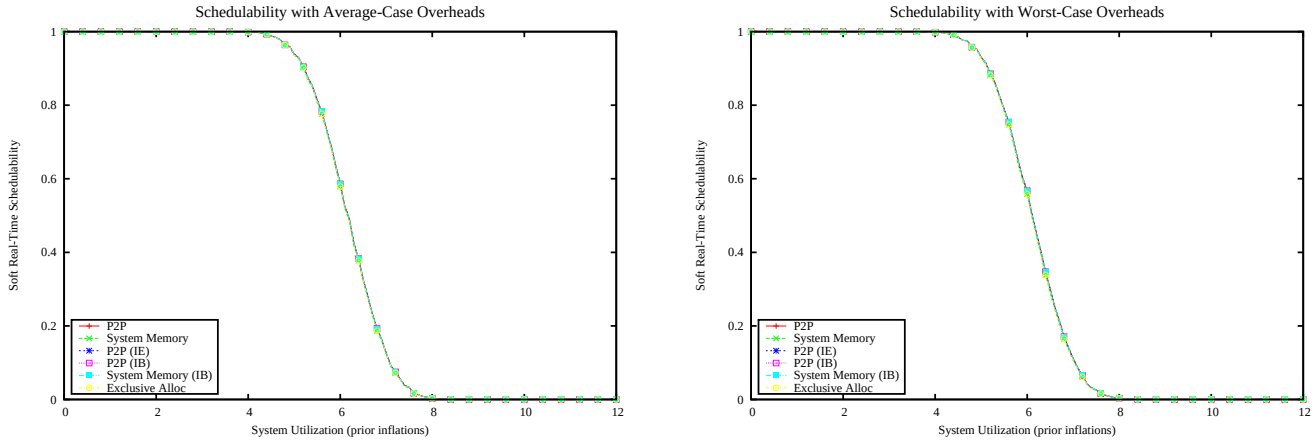

Figure 6267: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

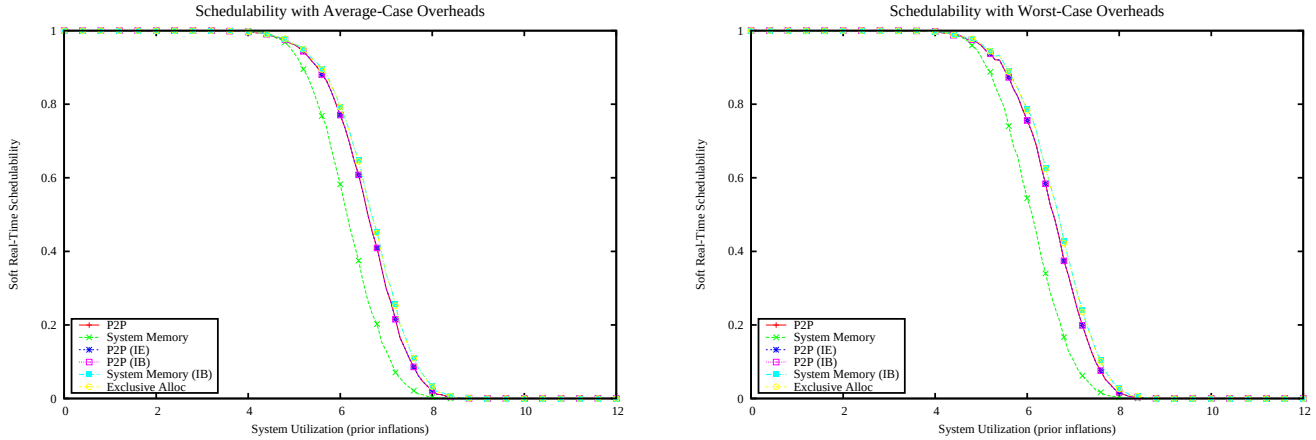

Figure 6268: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

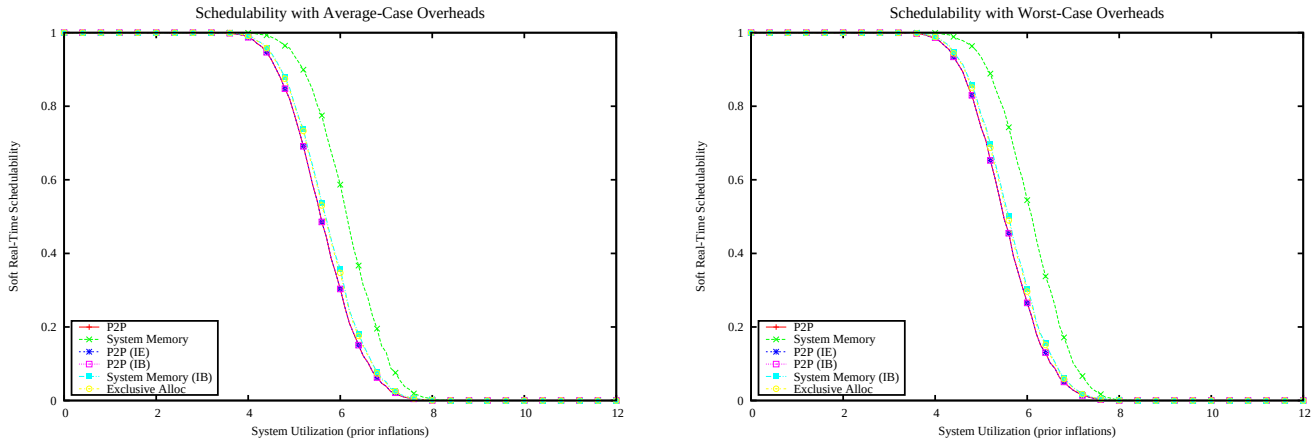

Figure 6269: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

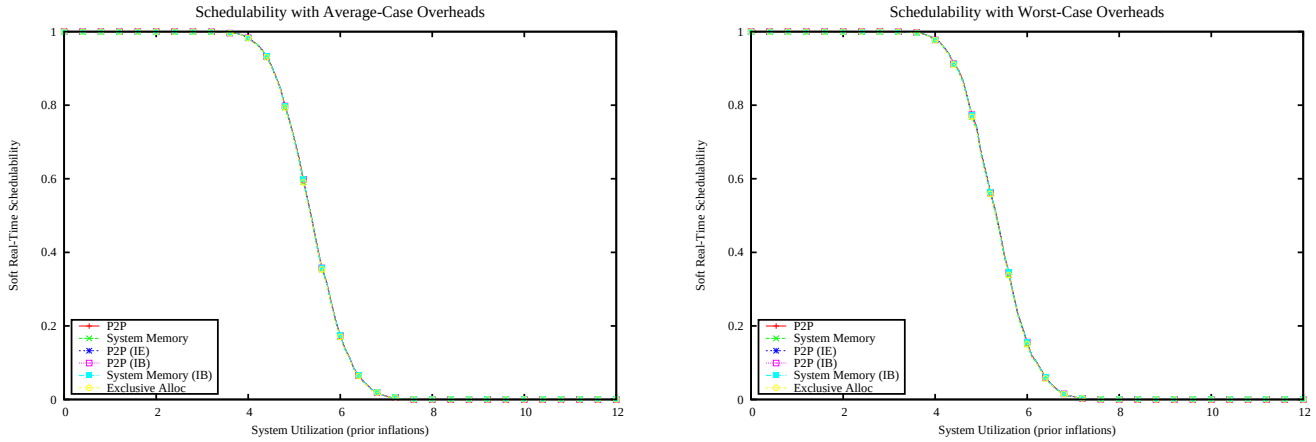

Figure 6270: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

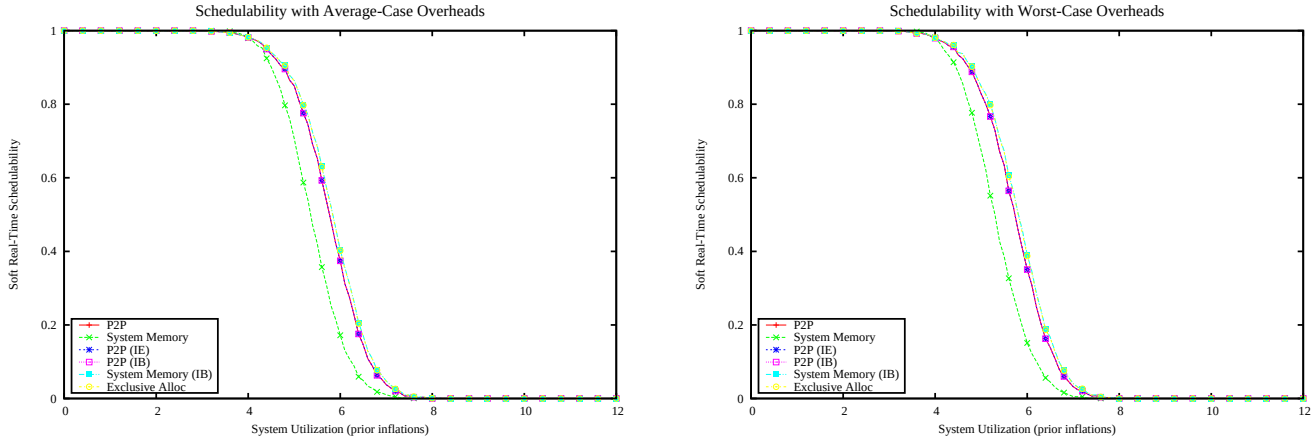

Figure 6271: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

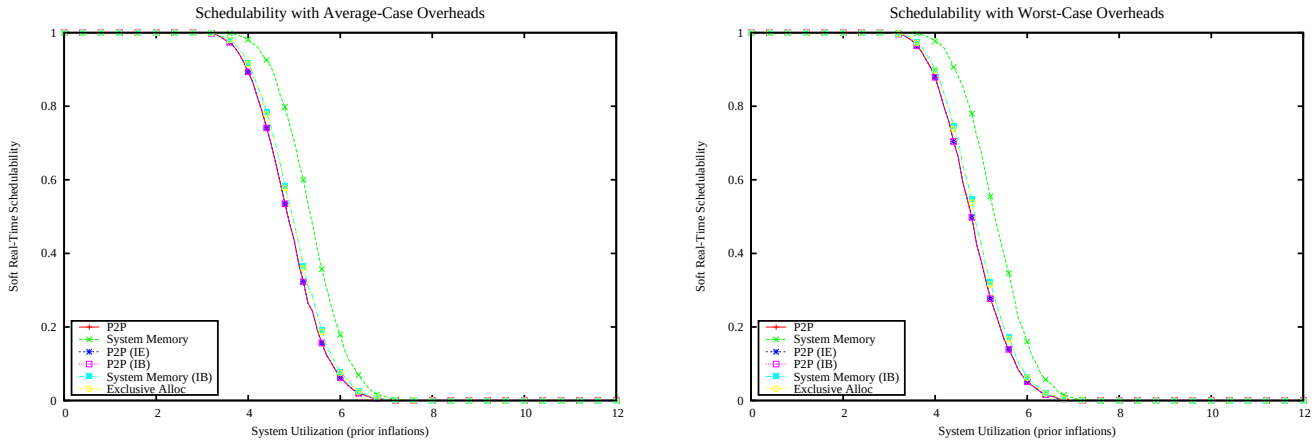

Figure 6272: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

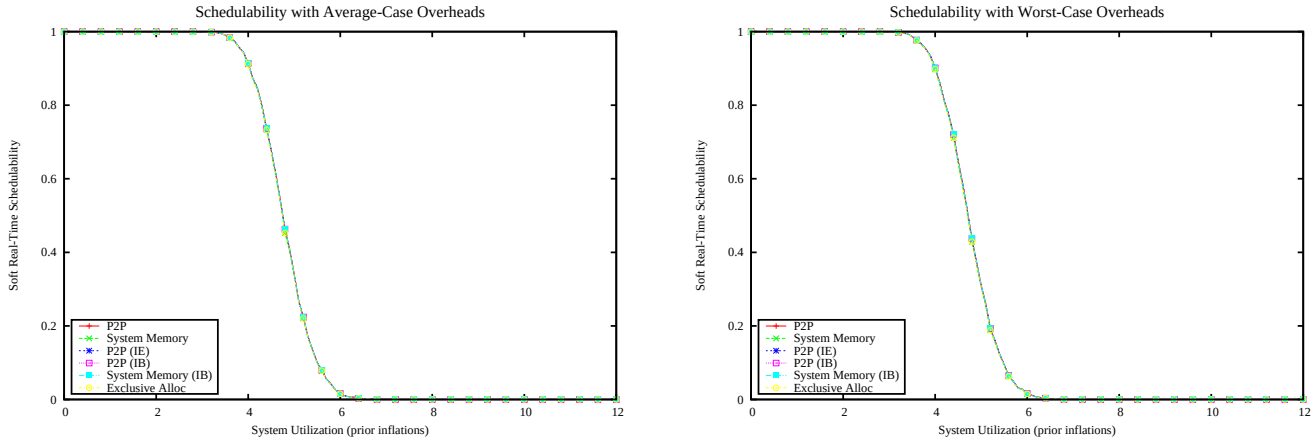

Figure 6273: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

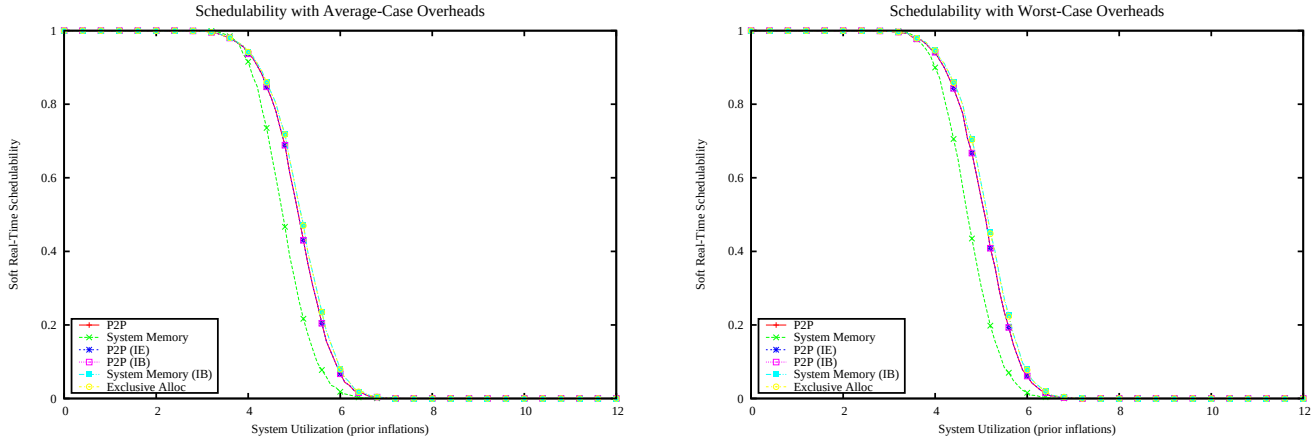

Figure 6274: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

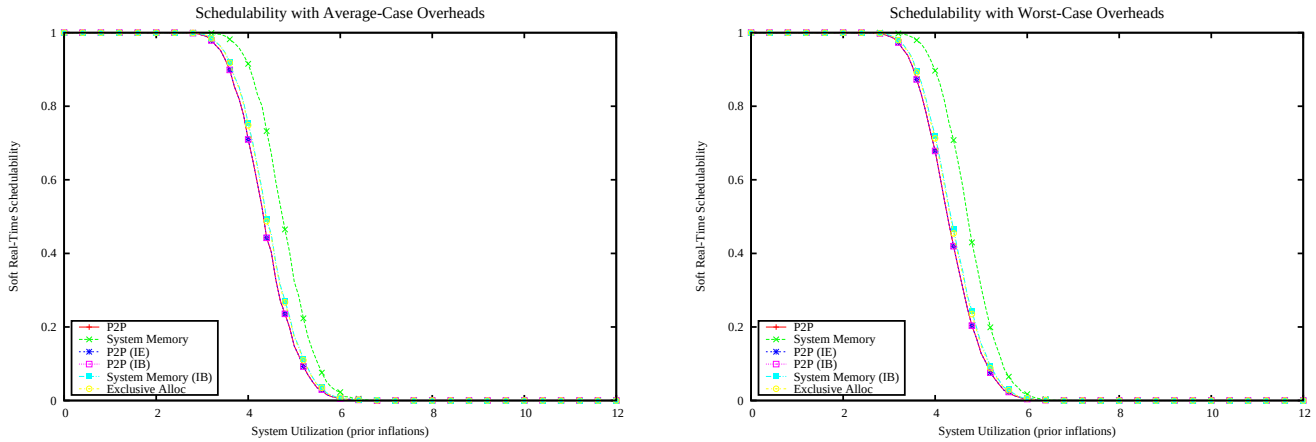

Figure 6275: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

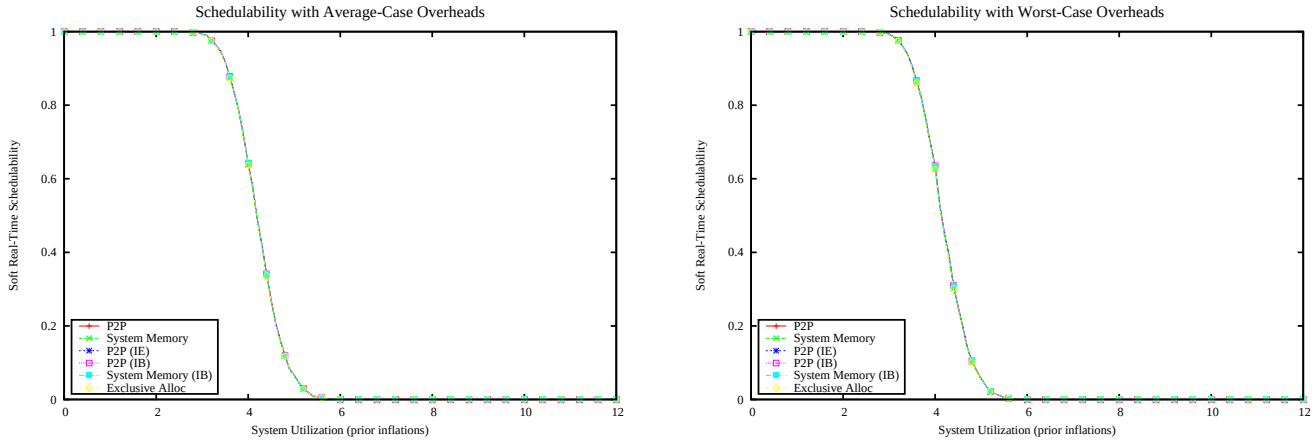

Figure 6276: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

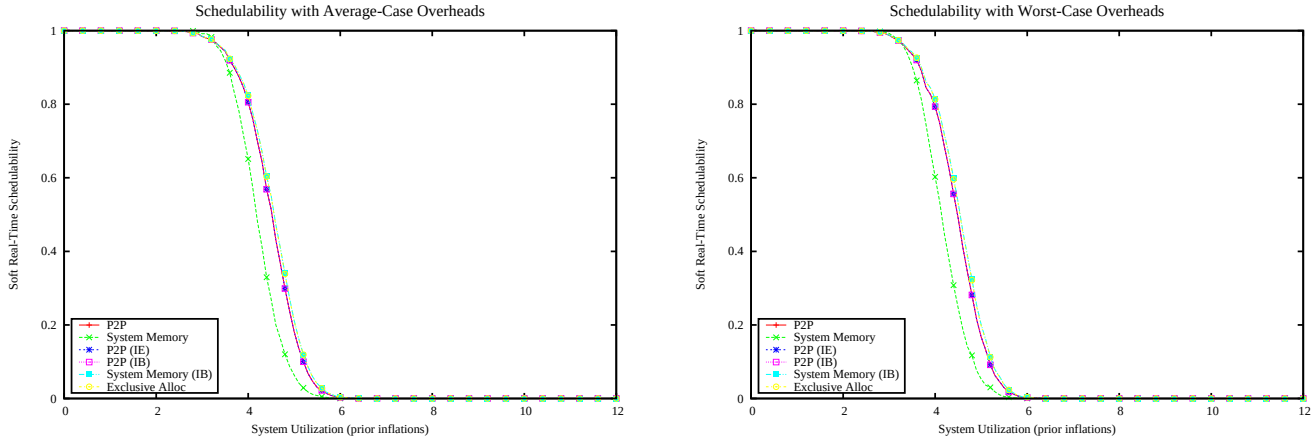

Figure 6277: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

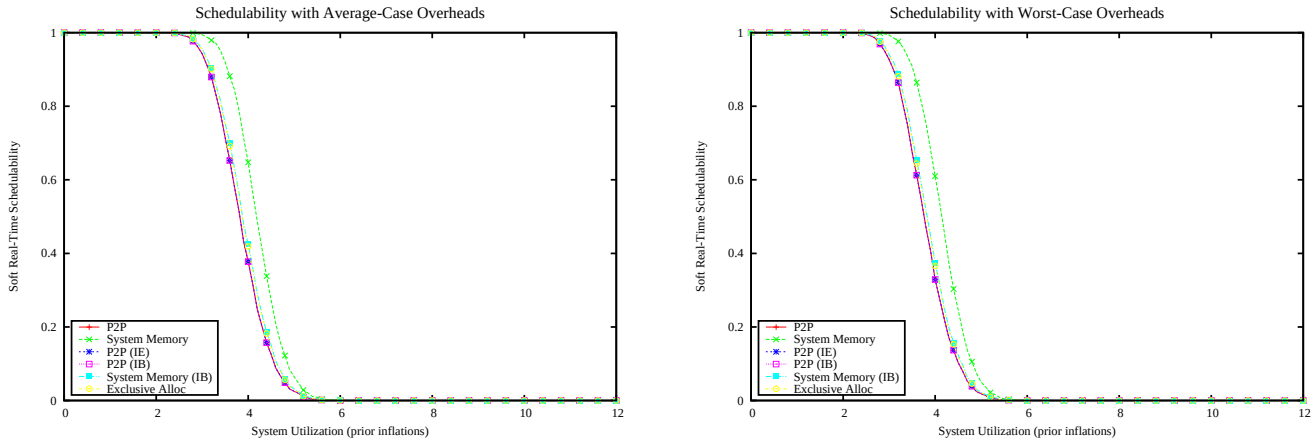

Figure 6278: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

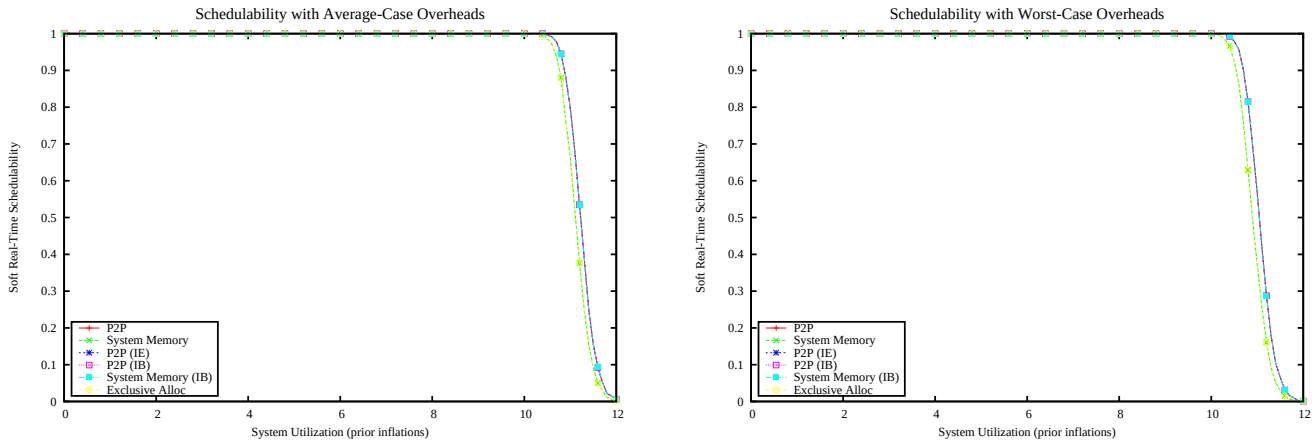

Figure 6279: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

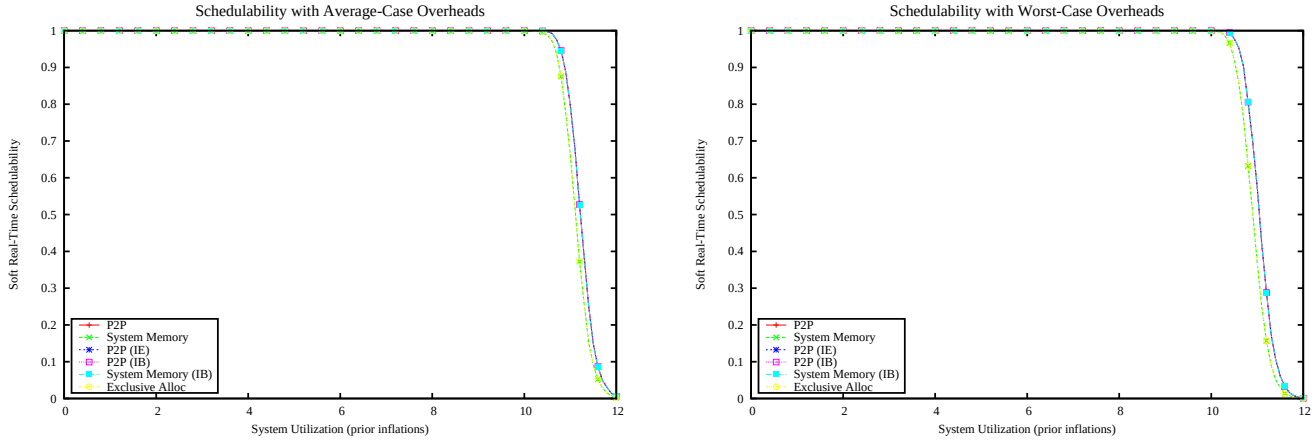

Figure 6280: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

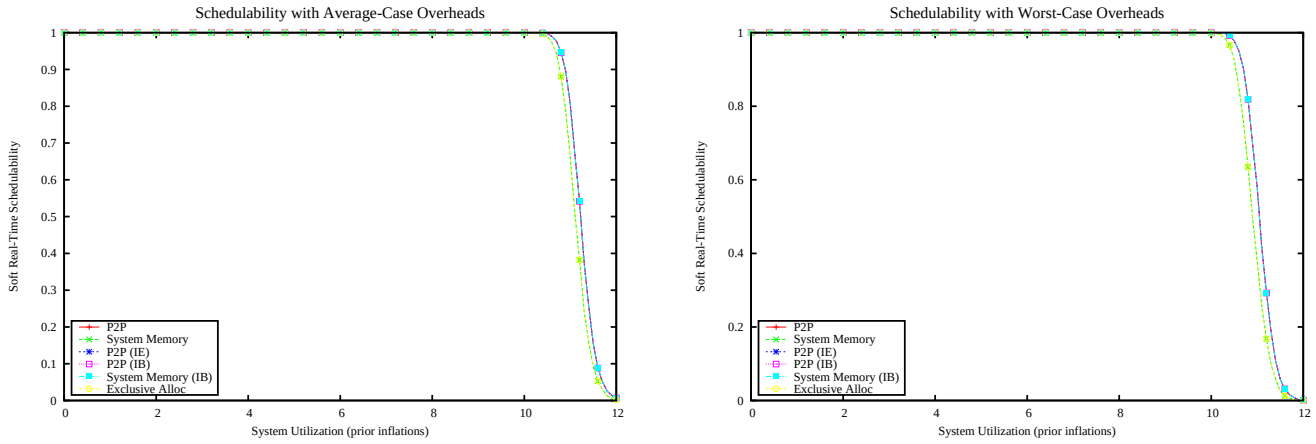

Figure 6281: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

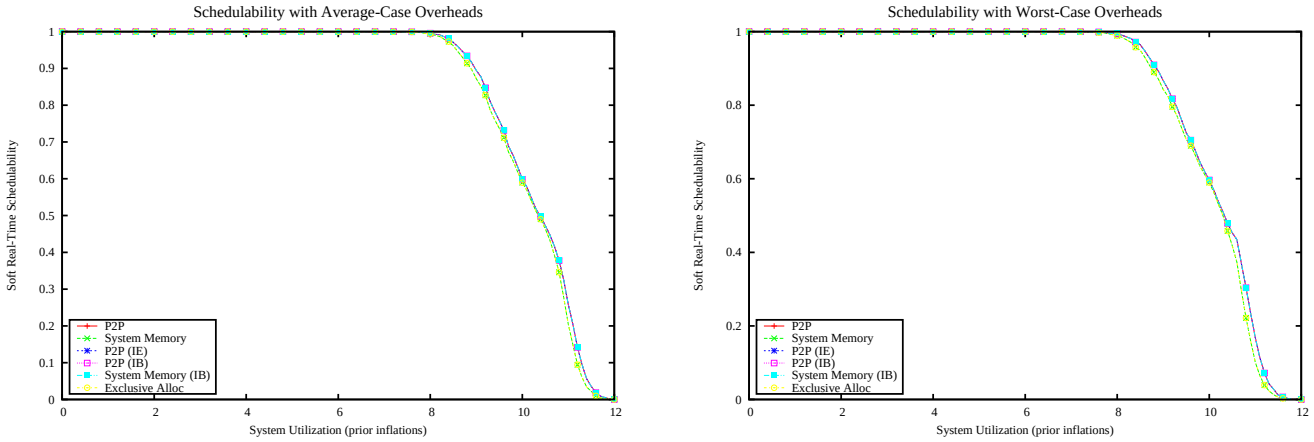

Figure 6282: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

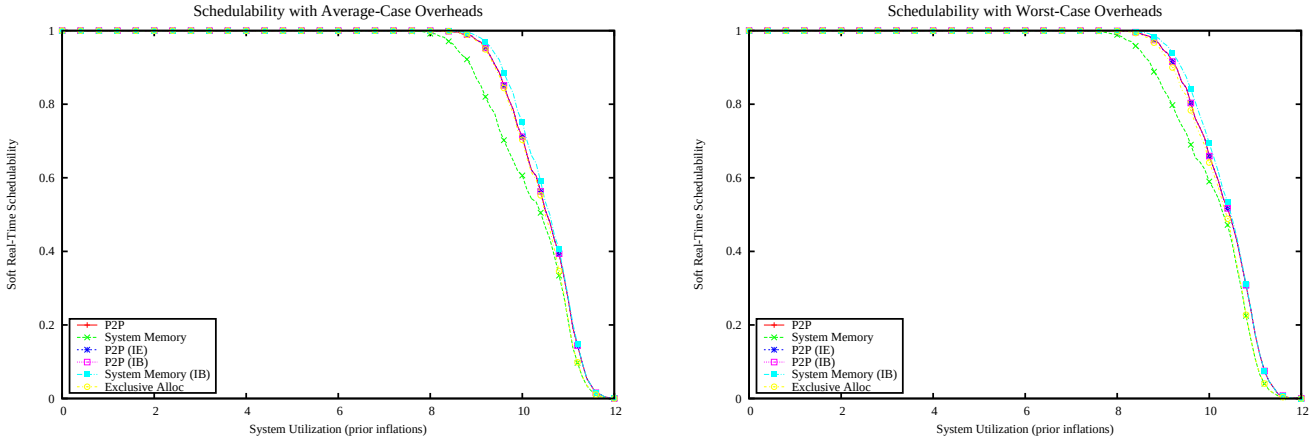

Figure 6283: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

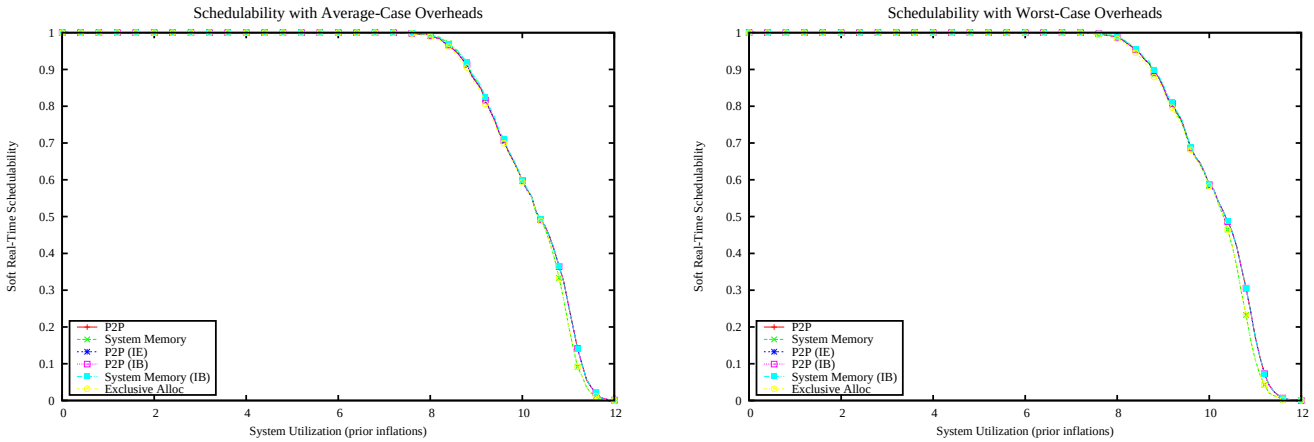

Figure 6284: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

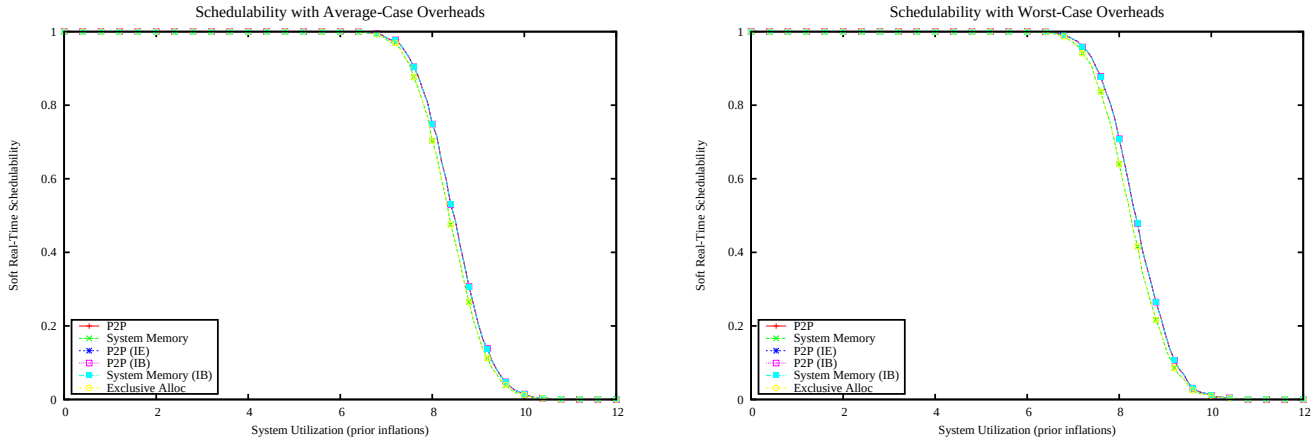

Figure 6285: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

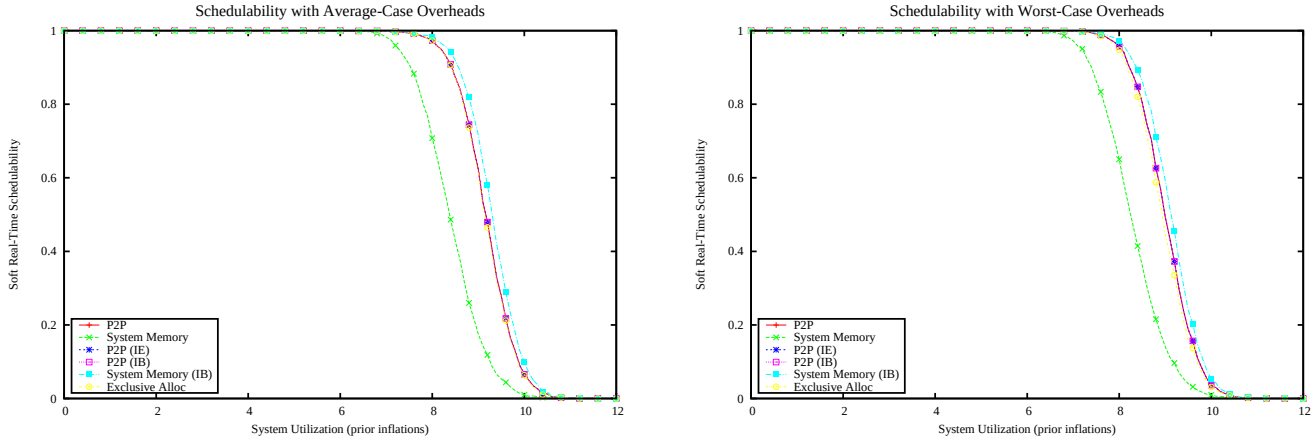

Figure 6286: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

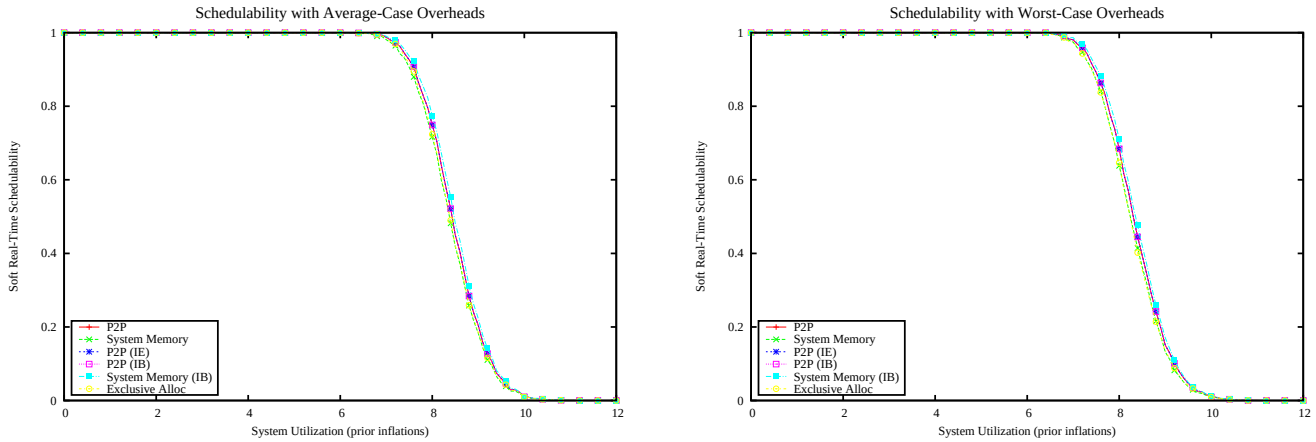

Figure 6287: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

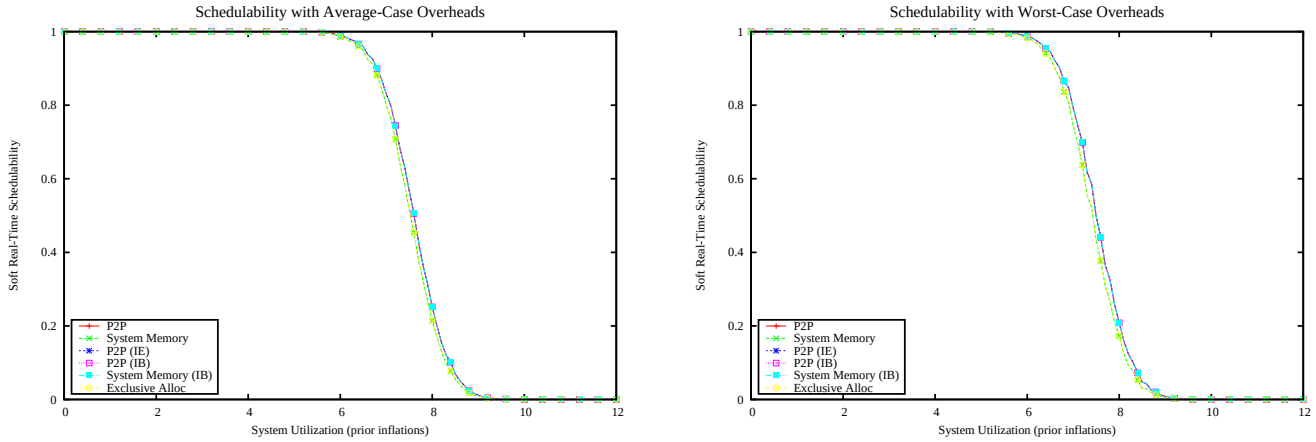

Figure 6288: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

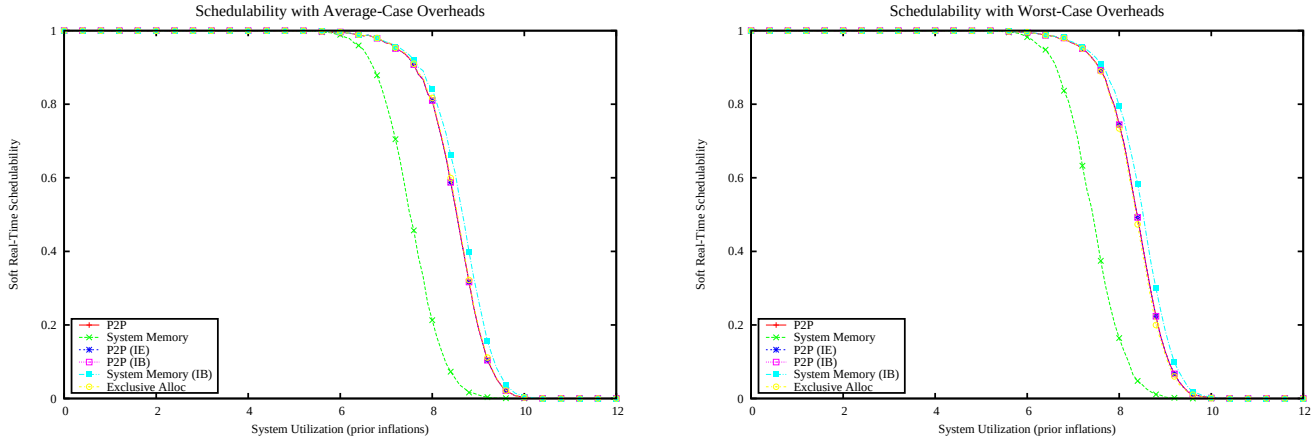

Figure 6289: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

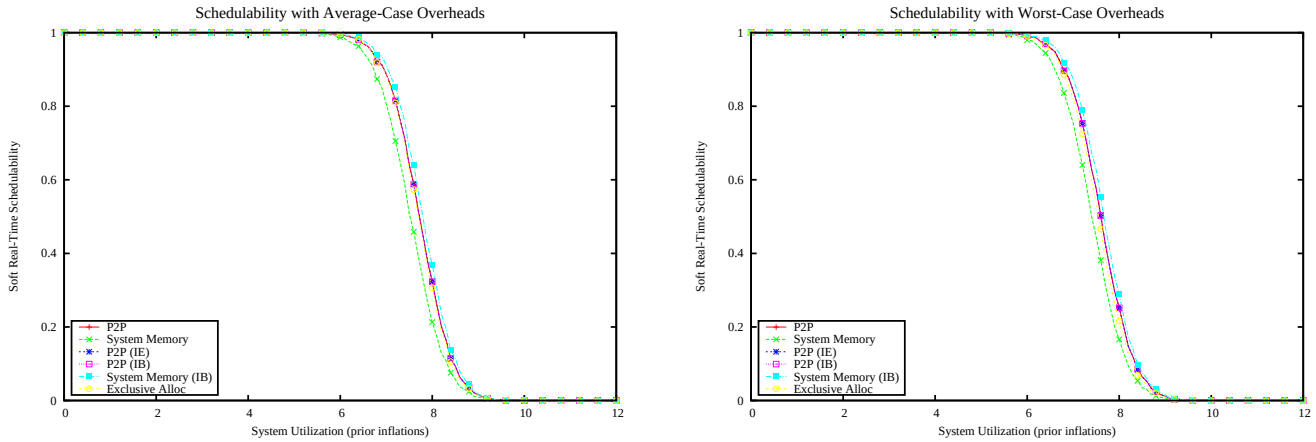

Figure 6290: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

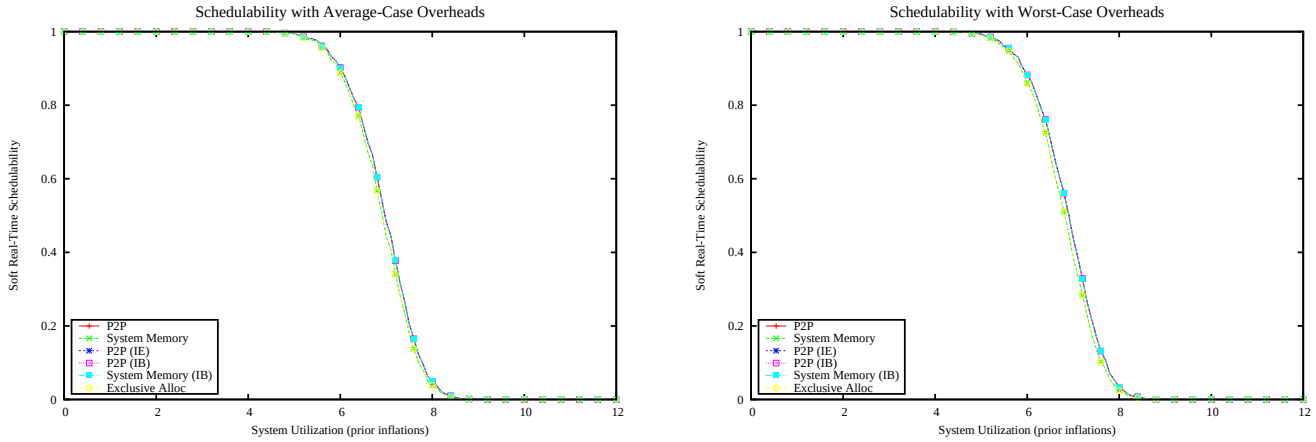

Figure 6291: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

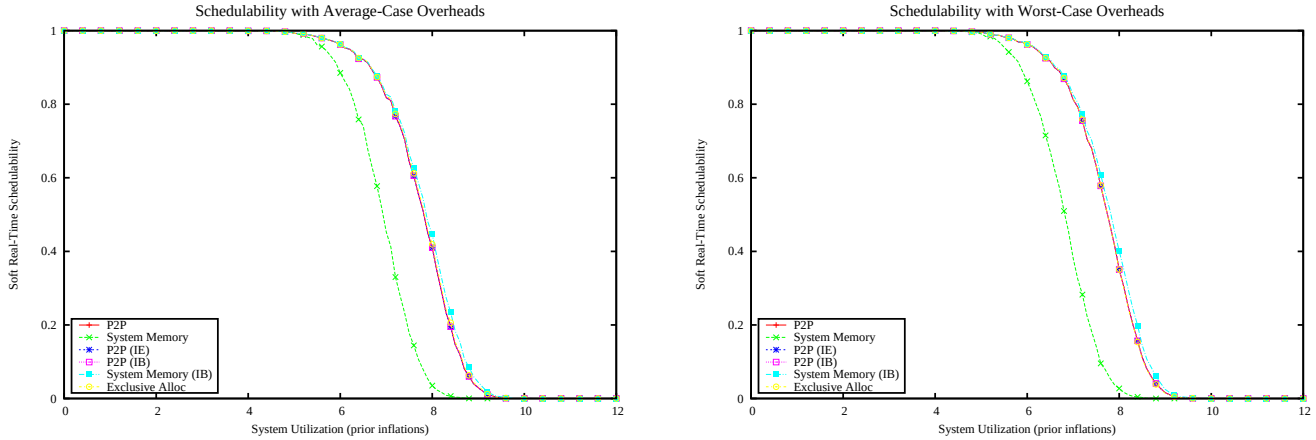

Figure 6292: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

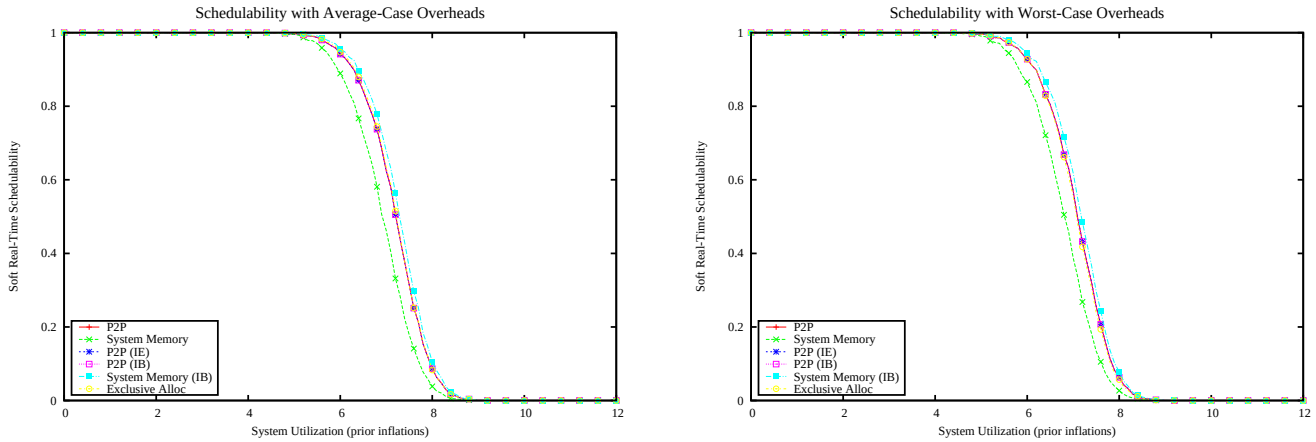

Figure 6293: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

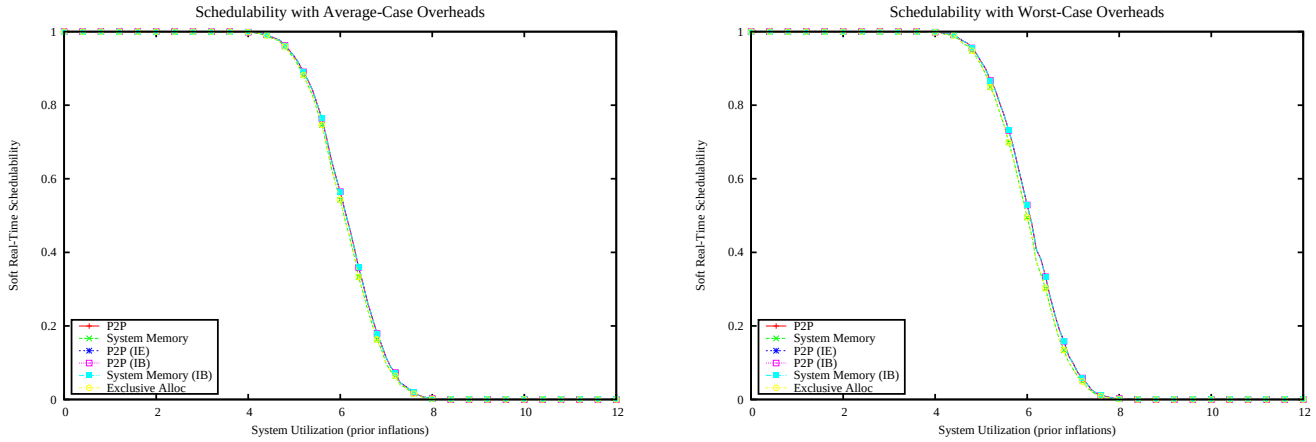

Figure 6294: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

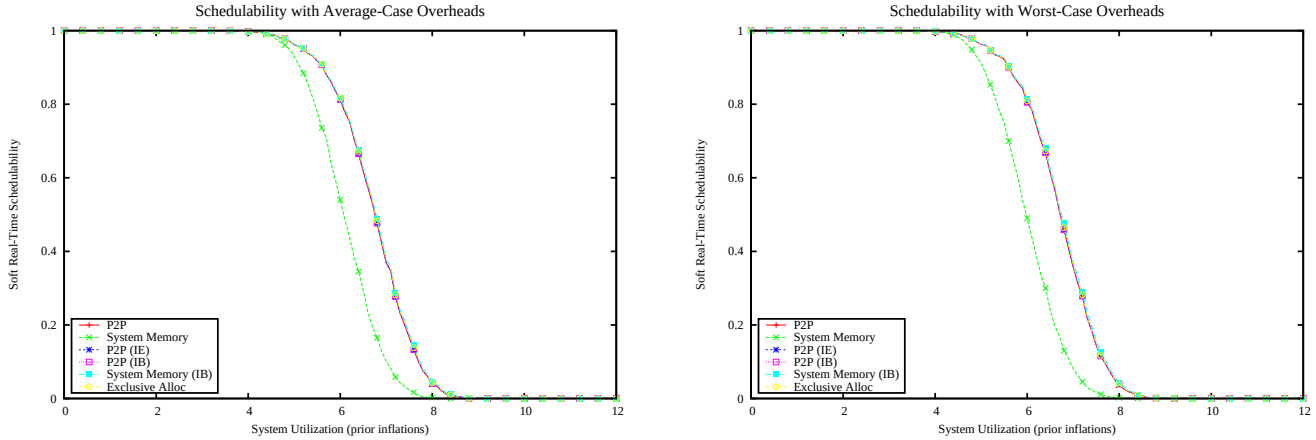

Figure 6295: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

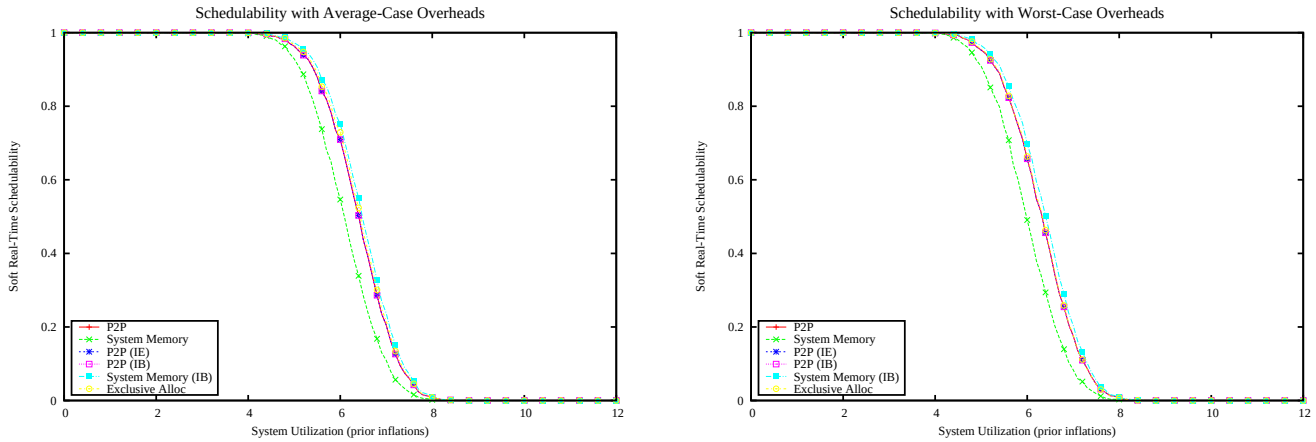

Figure 6296: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

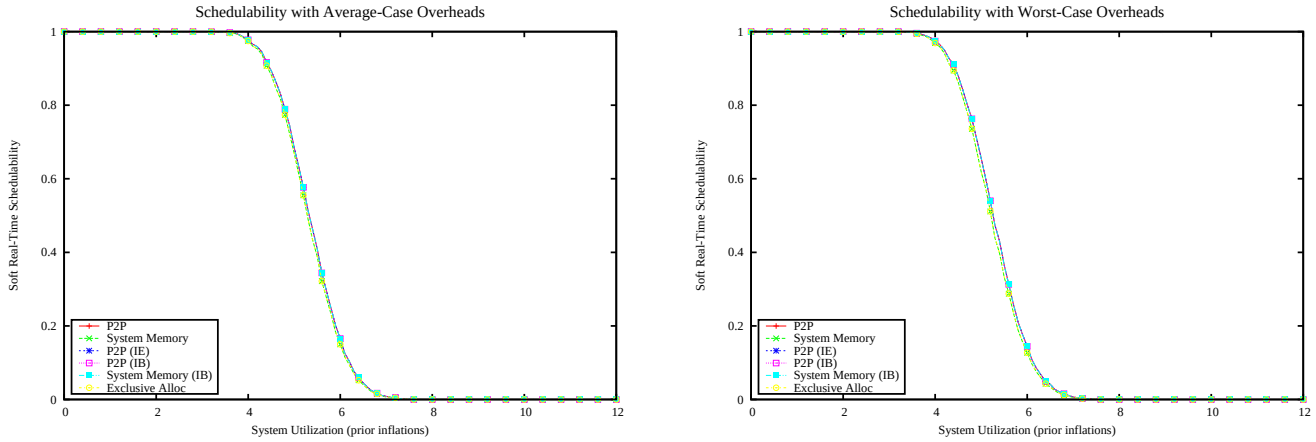

Figure 6297: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

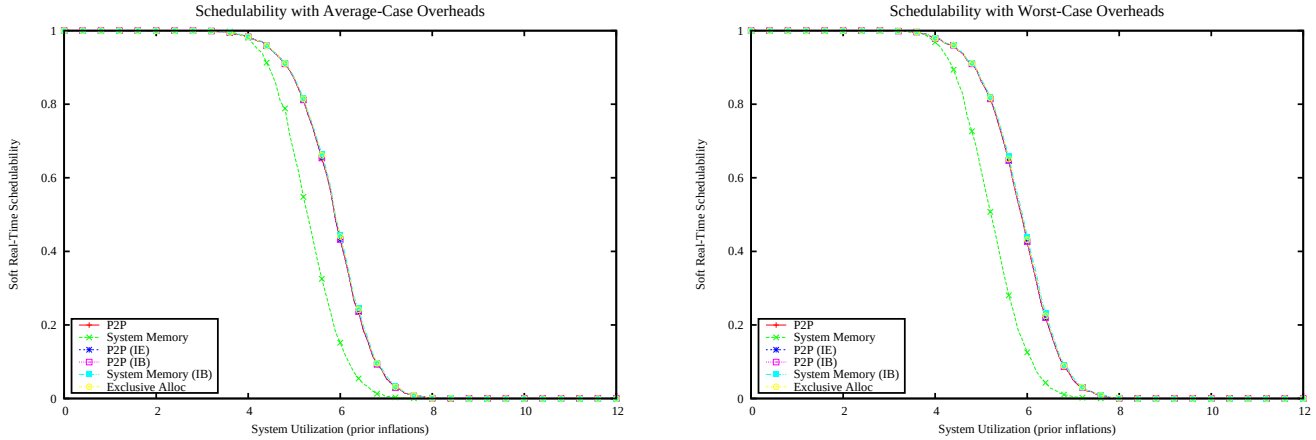

Figure 6298: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

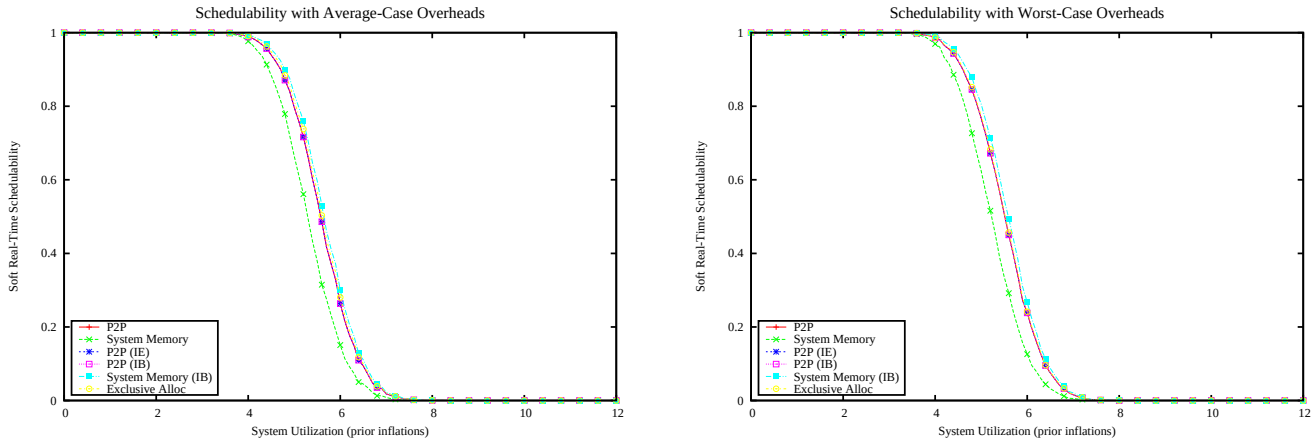

Figure 6299: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

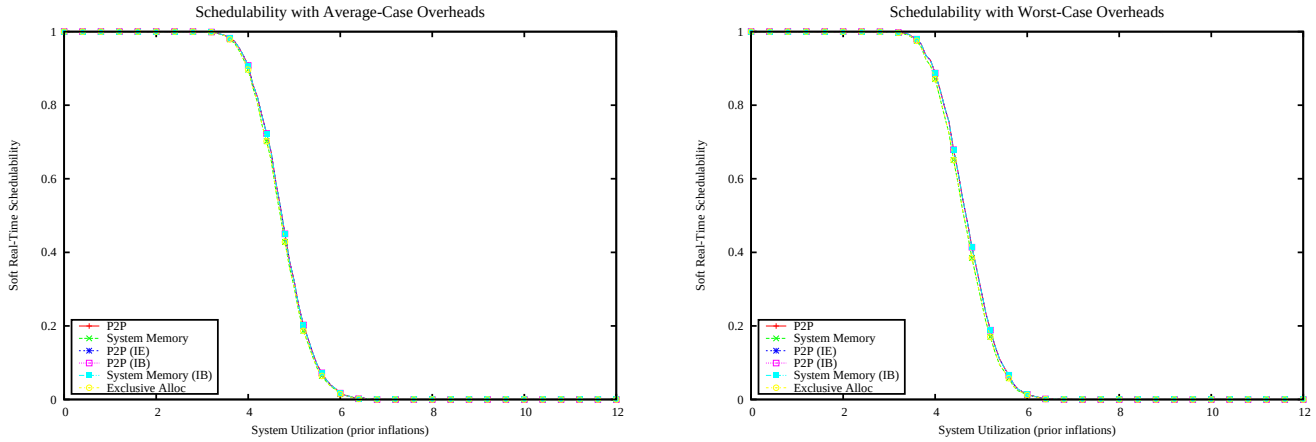

Figure 6300: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

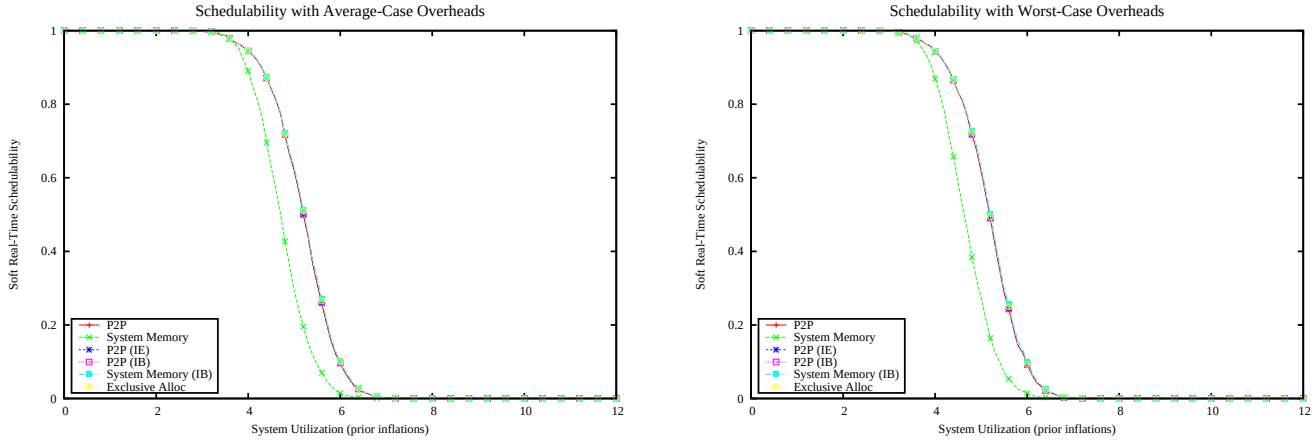

Figure 6301: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

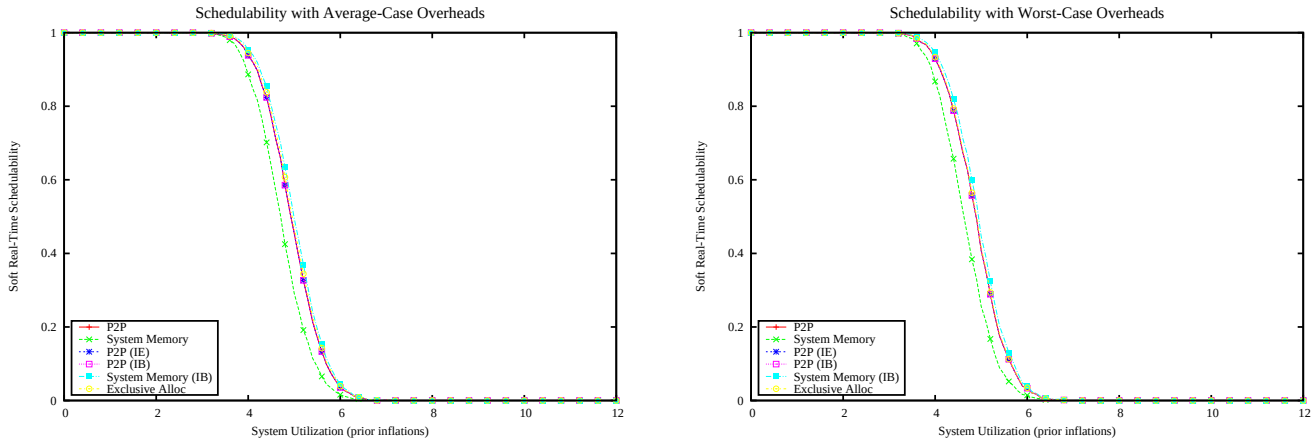

Figure 6302: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

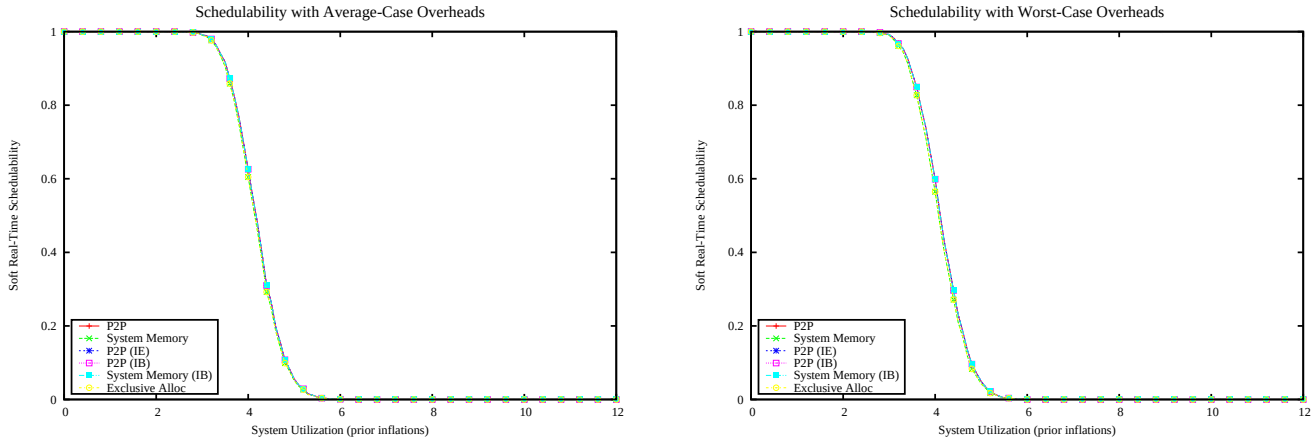

Figure 6303: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

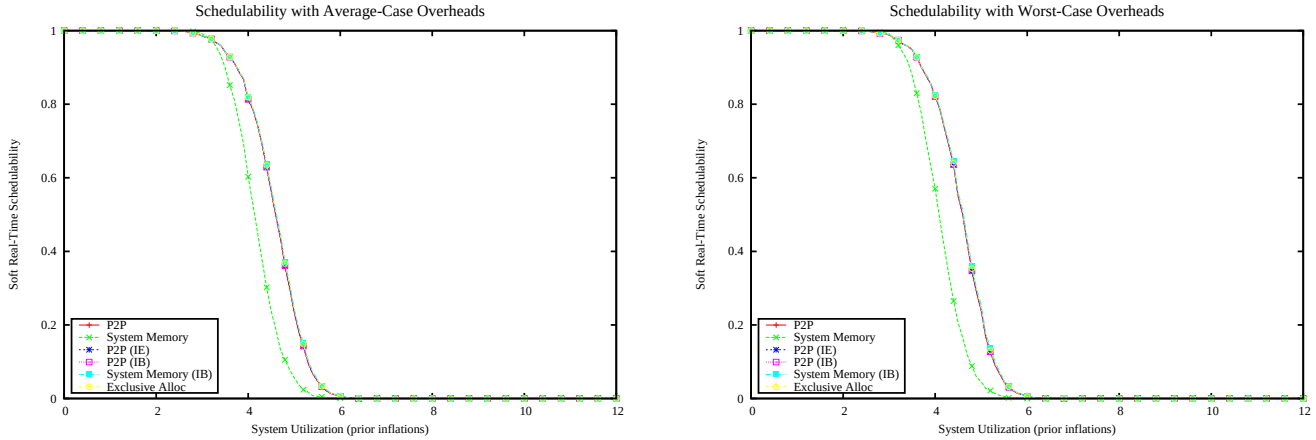

Figure 6304: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

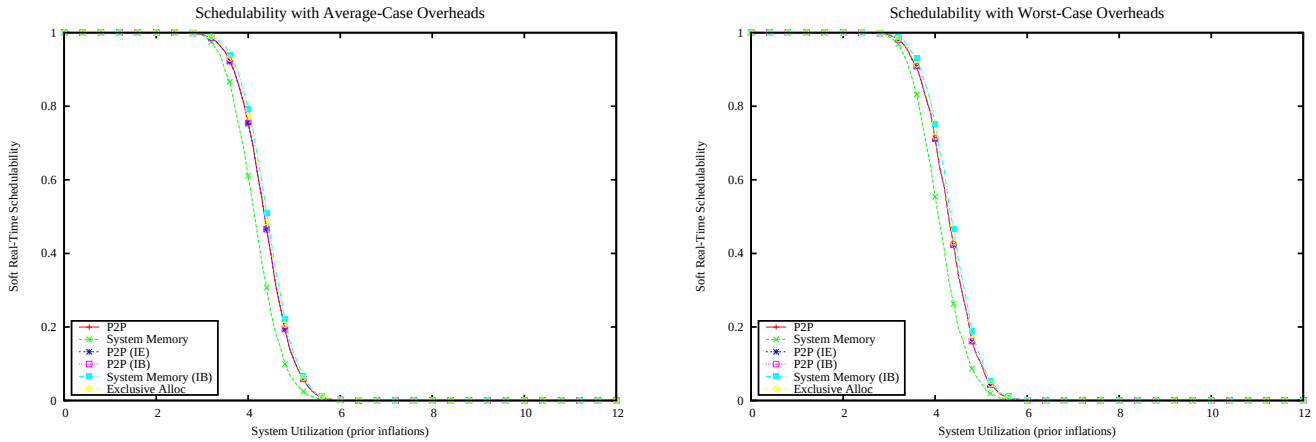

Figure 6305: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

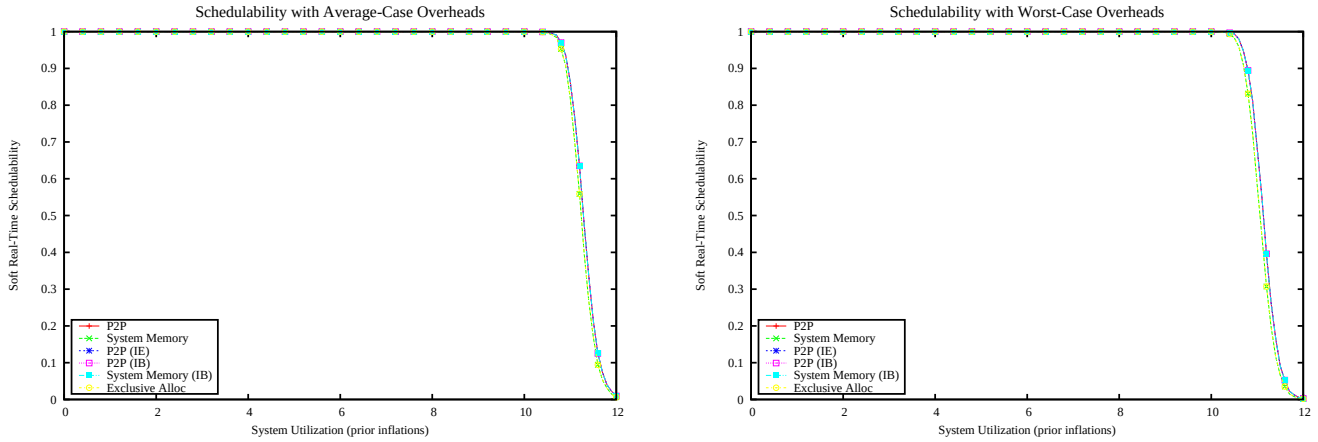

Figure 6306: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

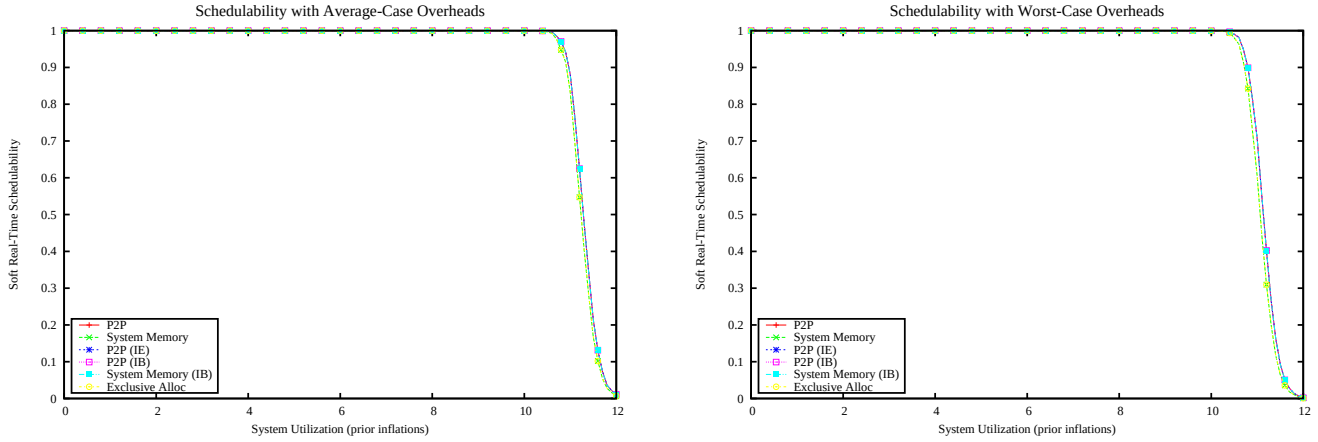

Figure 6307: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

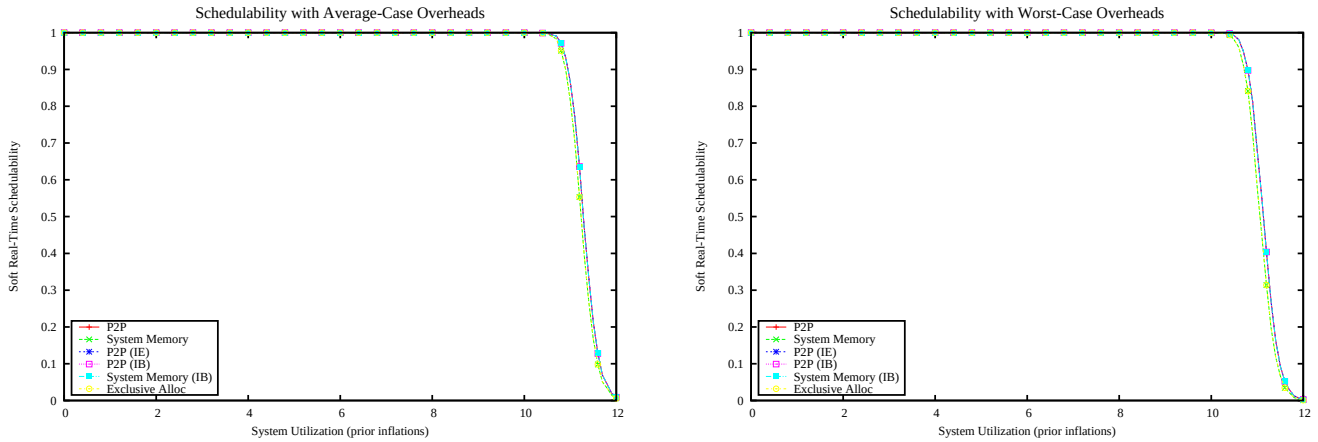

Figure 6308: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

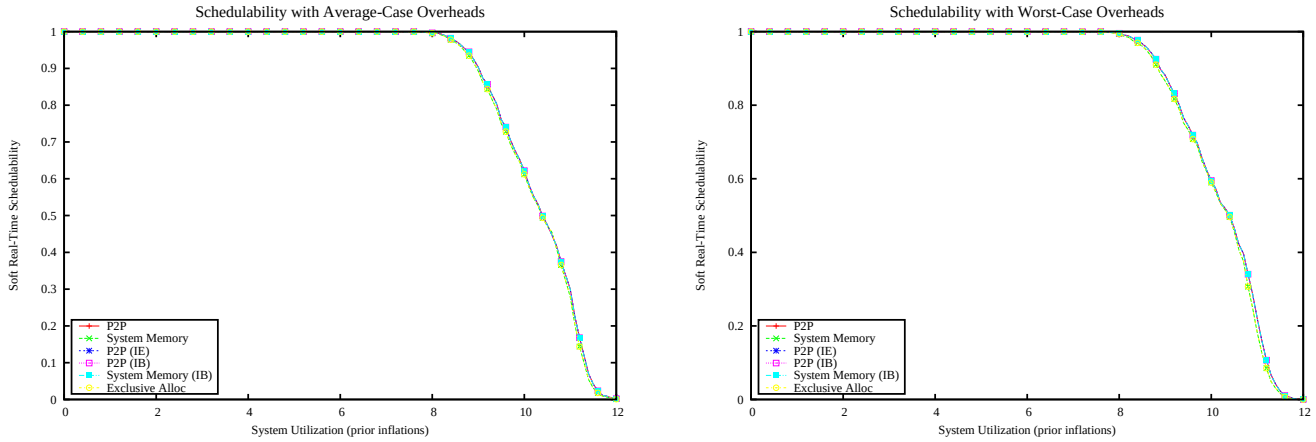

Figure 6309: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

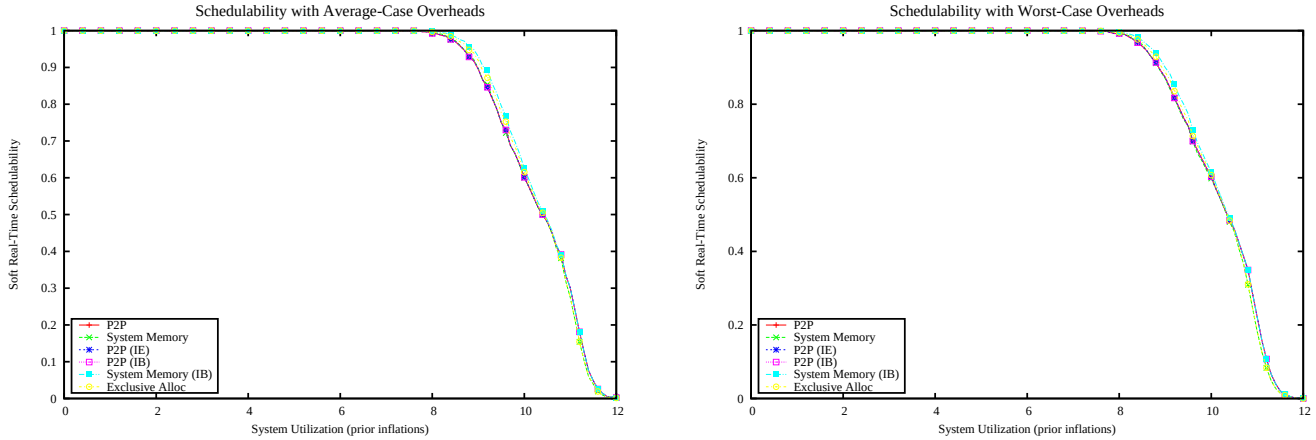

Figure 6310: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

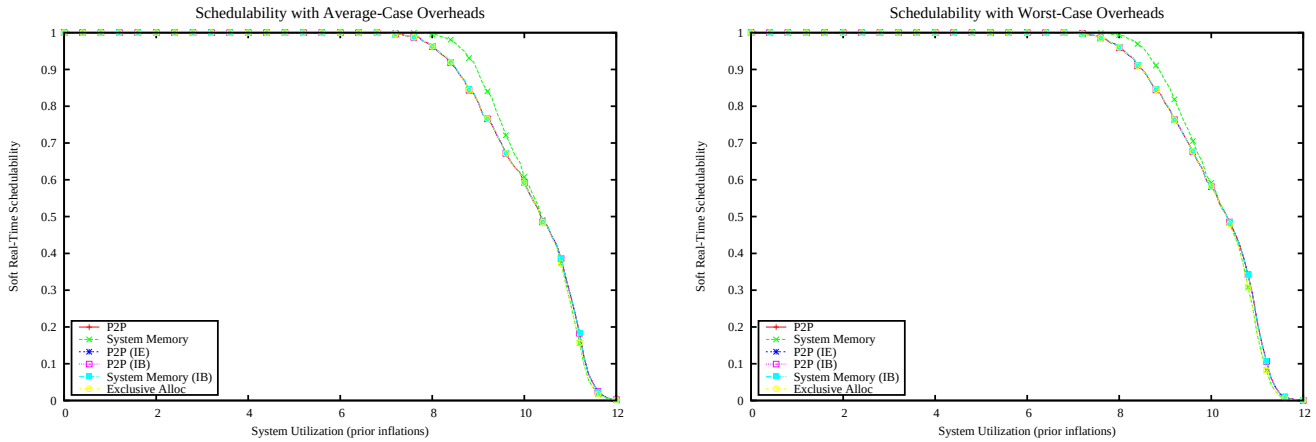

Figure 6311: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

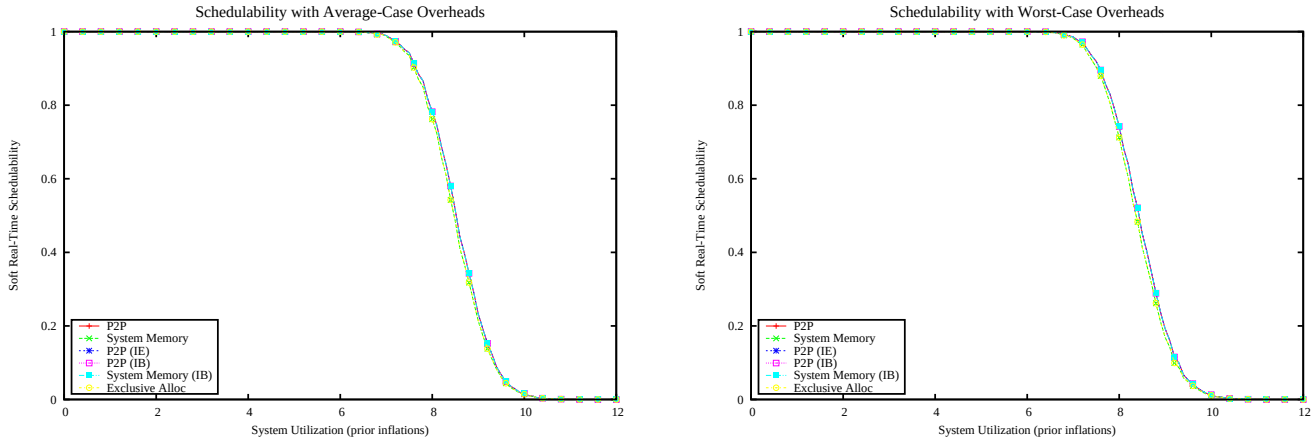

Figure 6312: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

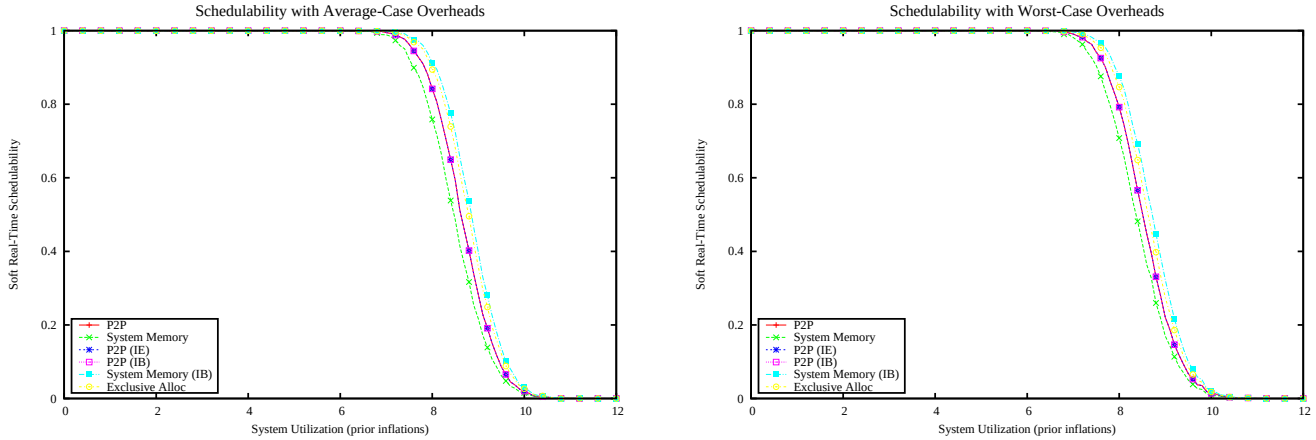

Figure 6313: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

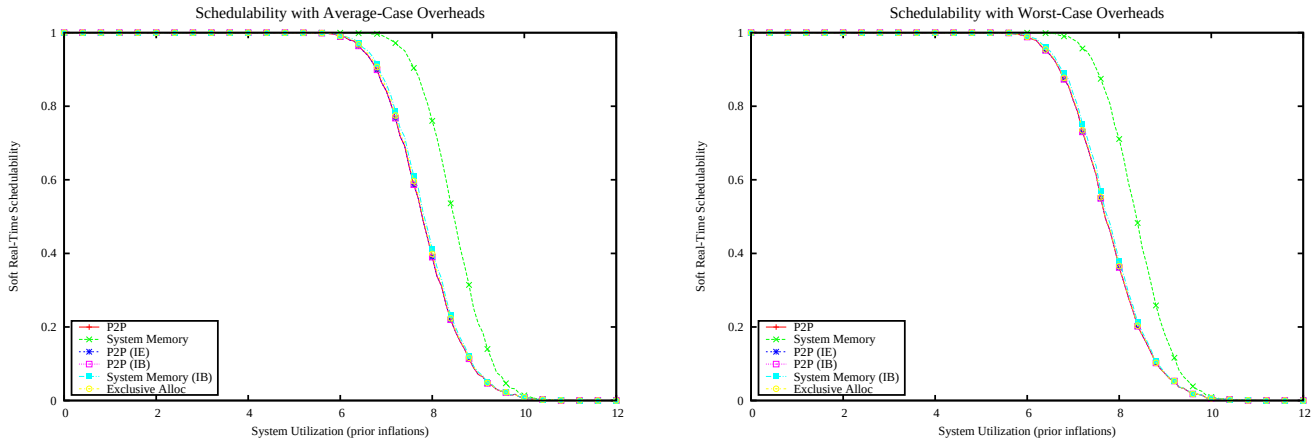

Figure 6314: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

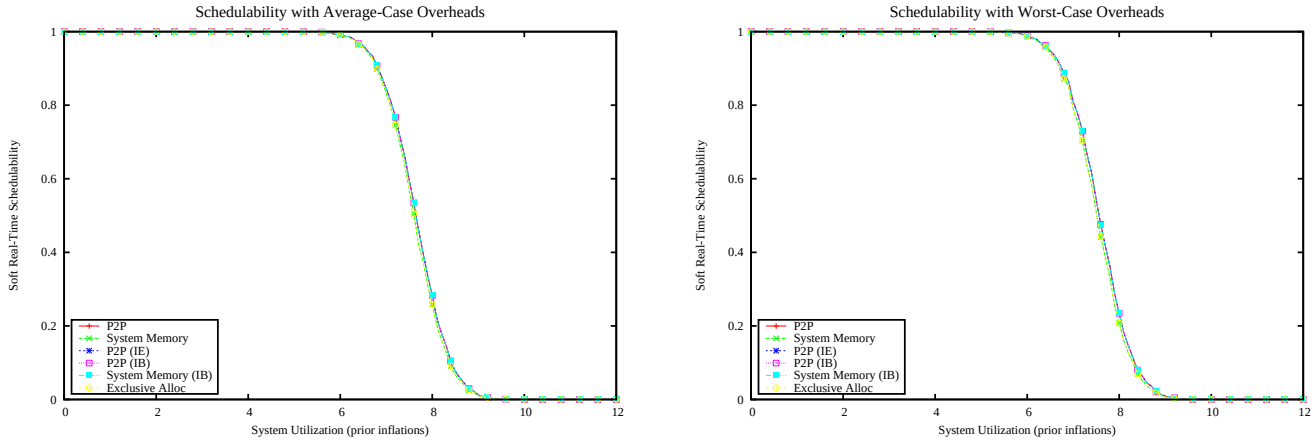

Figure 6315: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

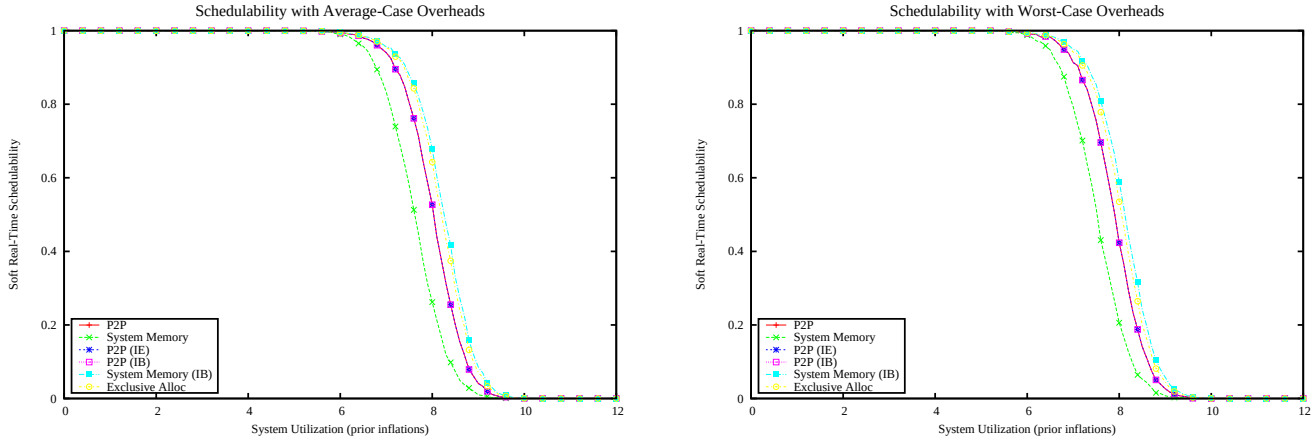

Figure 6316: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

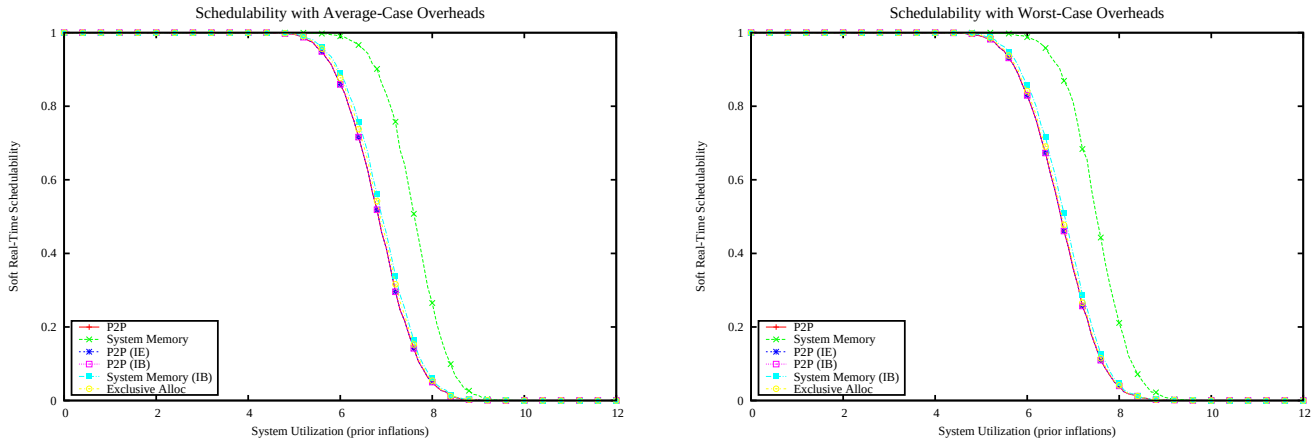

Figure 6317: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

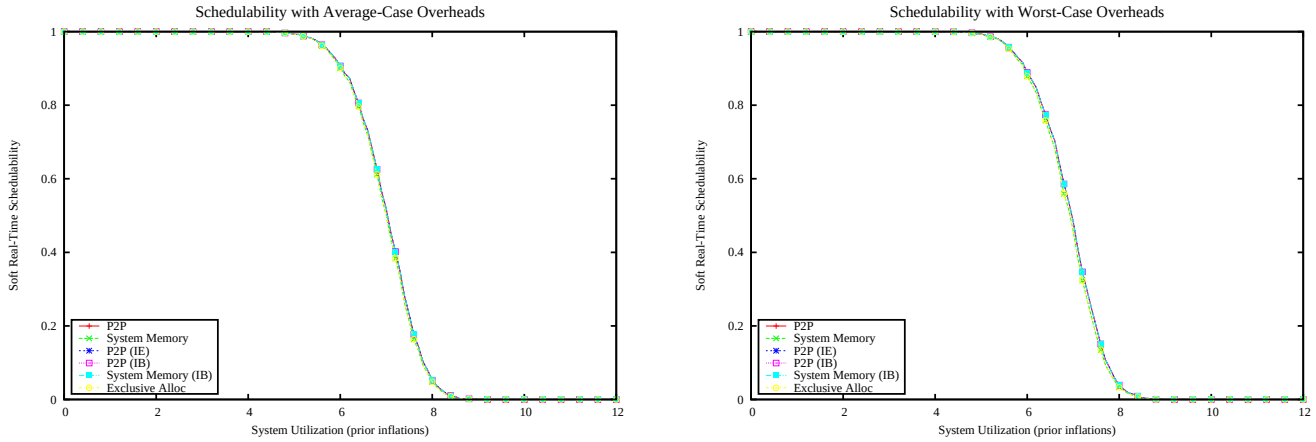

Figure 6318: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

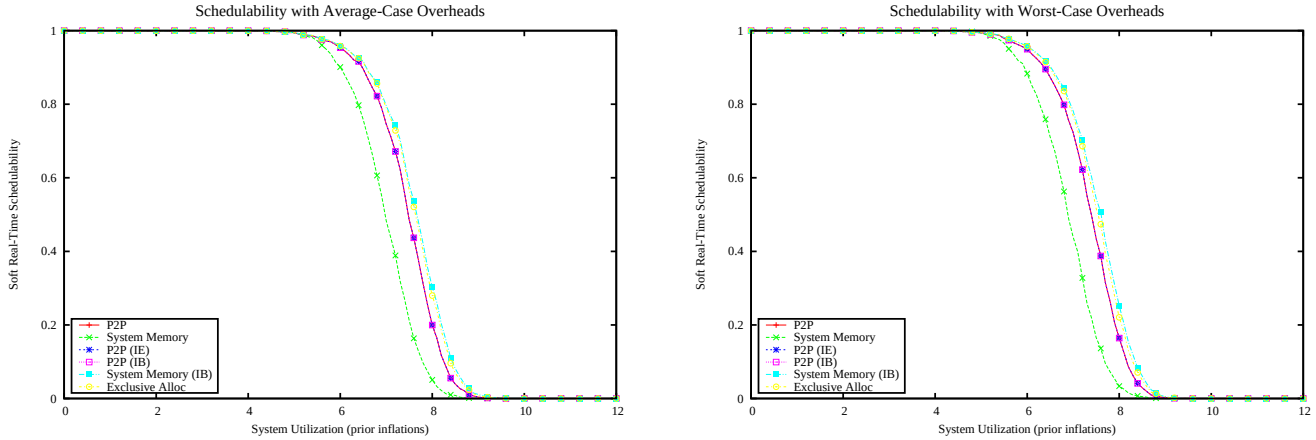

Figure 6319: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

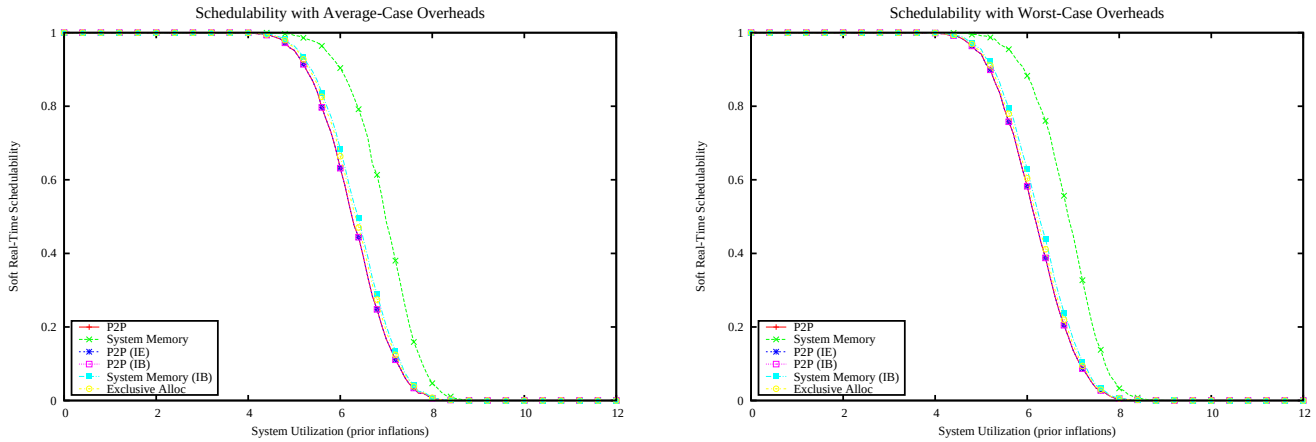

Figure 6320: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

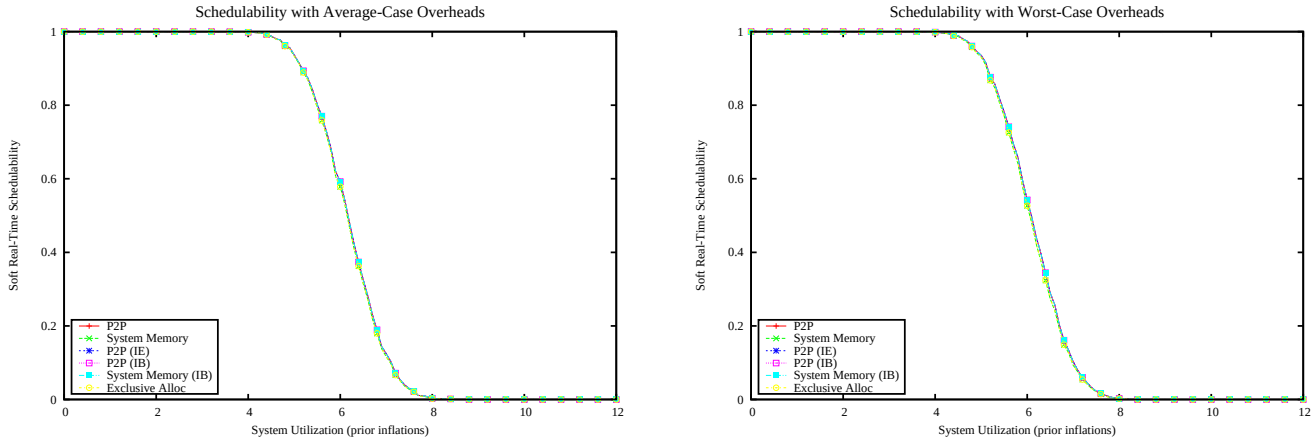

Figure 6321: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

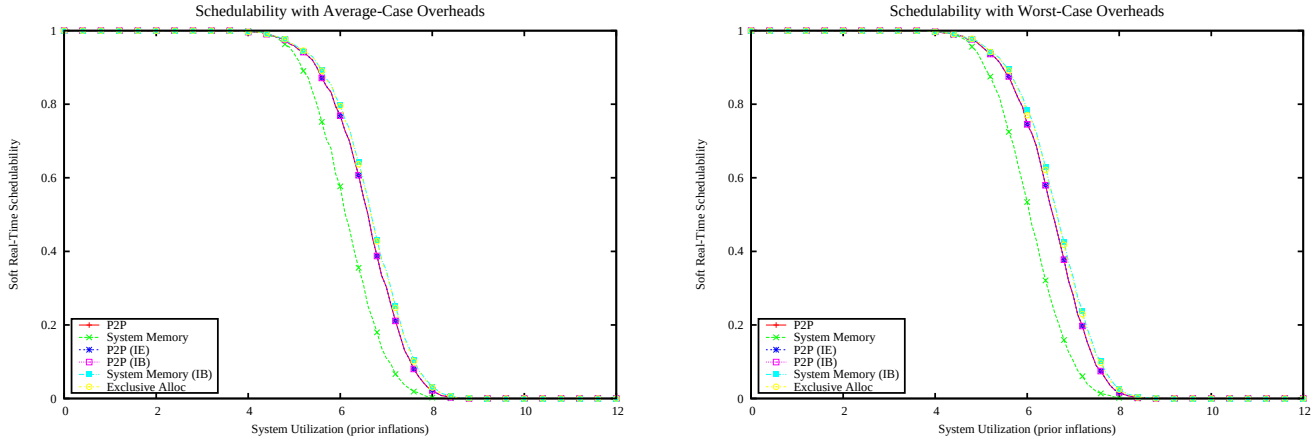

Figure 6322: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

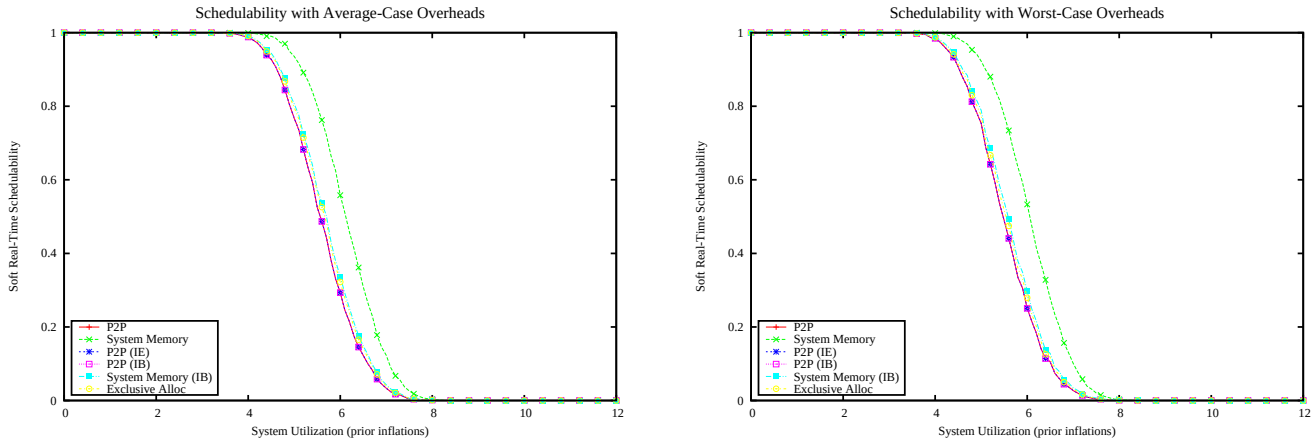

Figure 6323: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

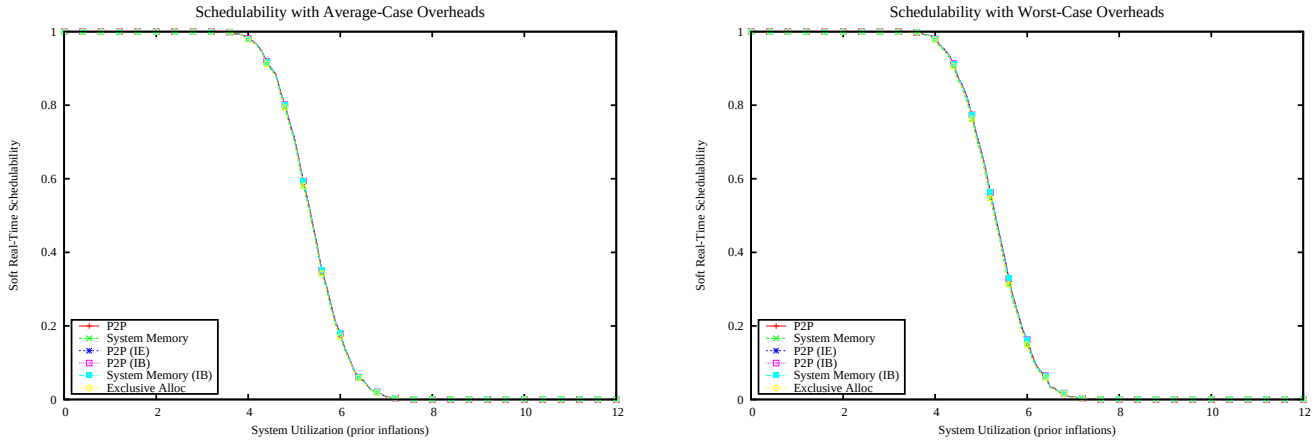

Figure 6324: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

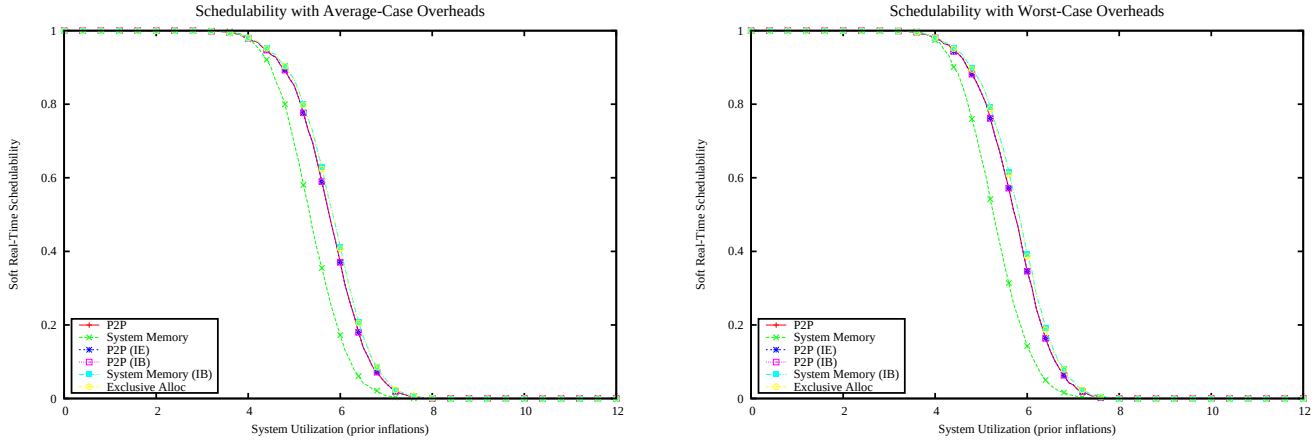

Figure 6325: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

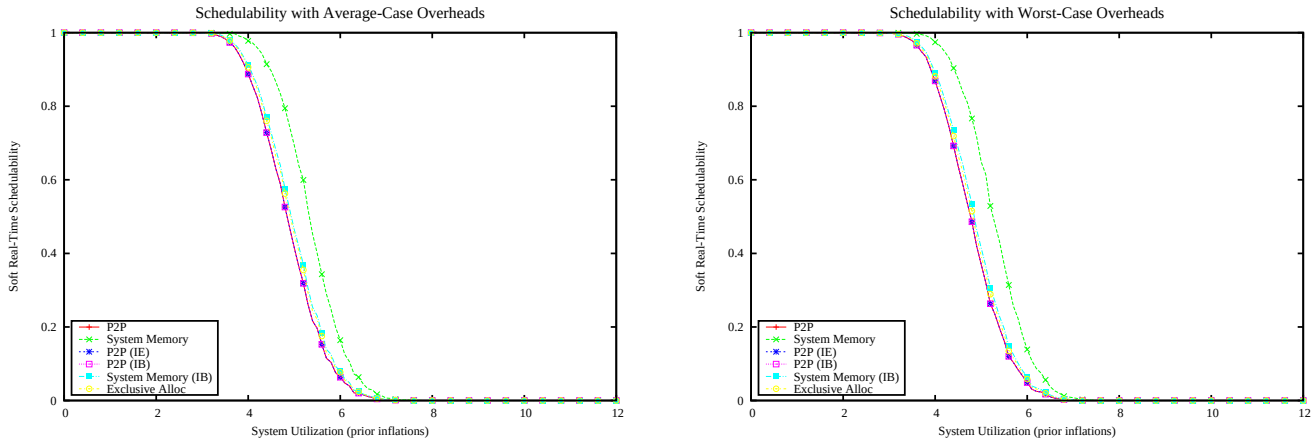

Figure 6326: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

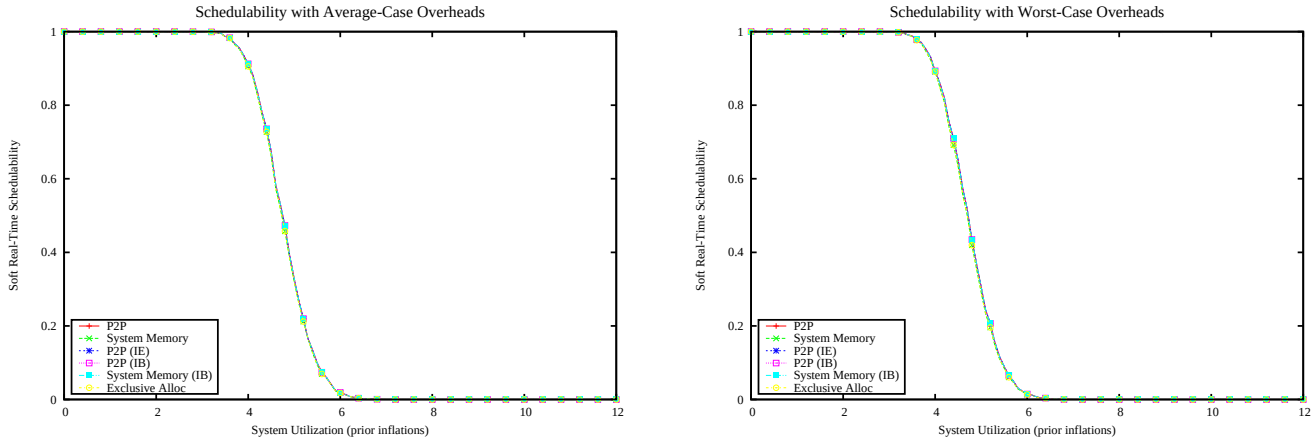

Figure 6327: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

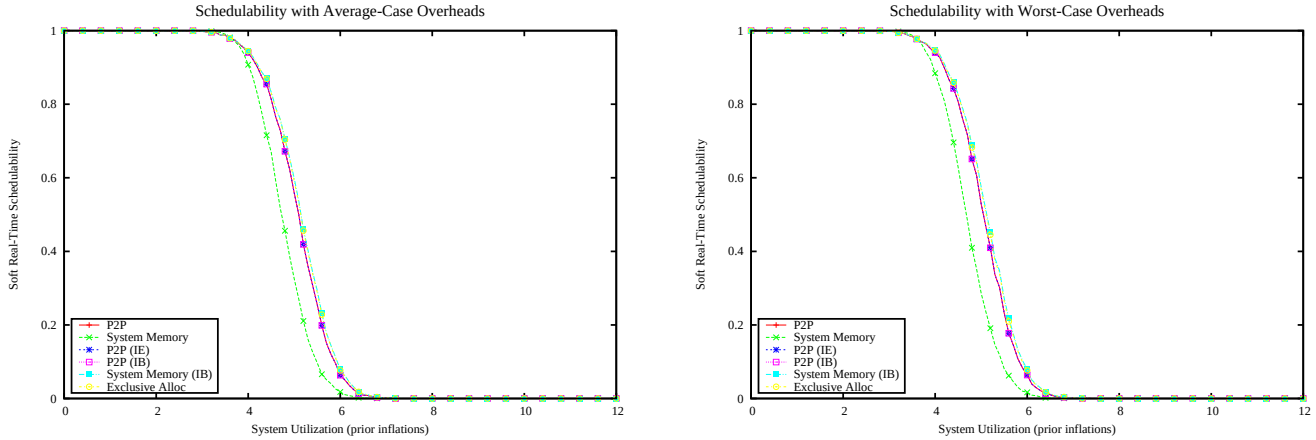

Figure 6328: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

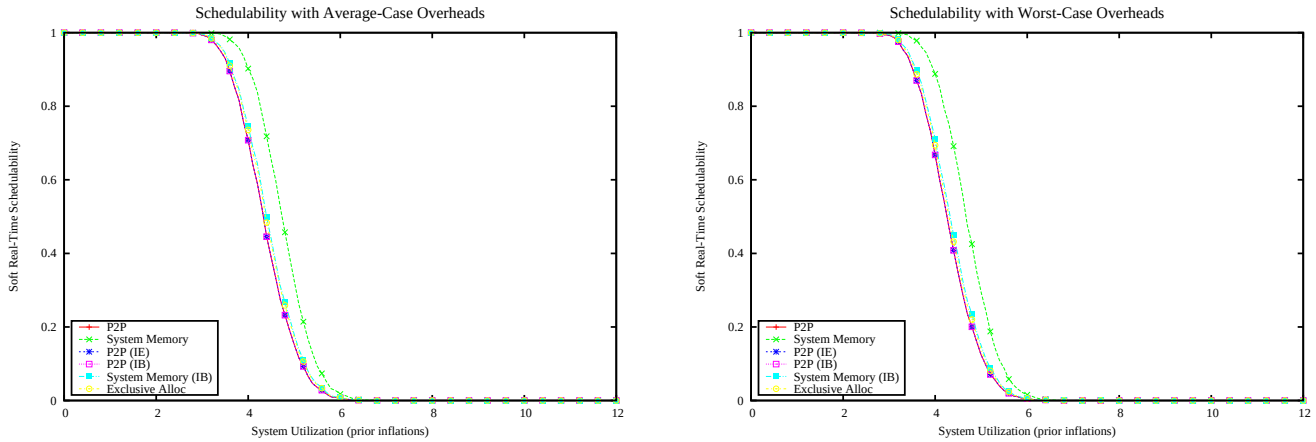

Figure 6329: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

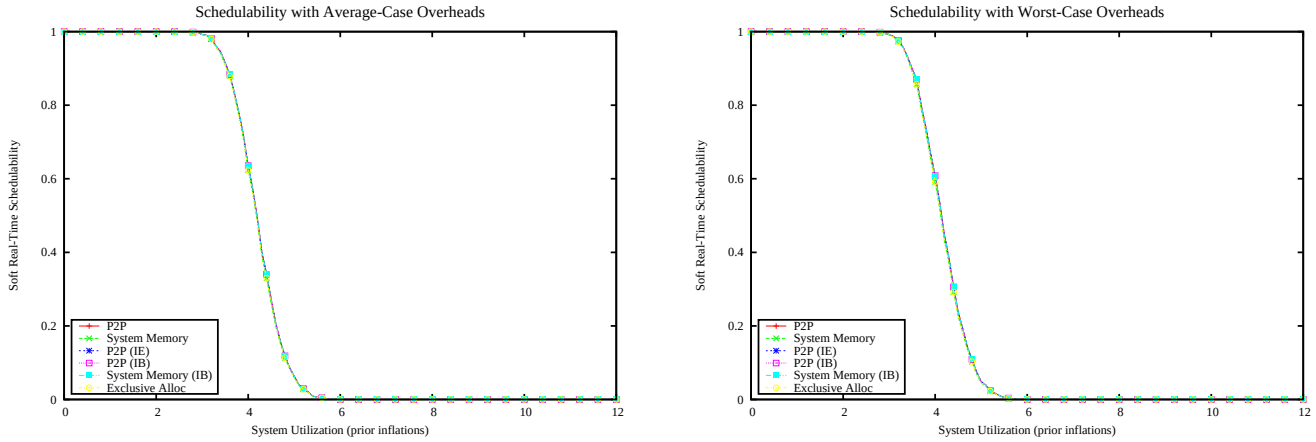

Figure 6330: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

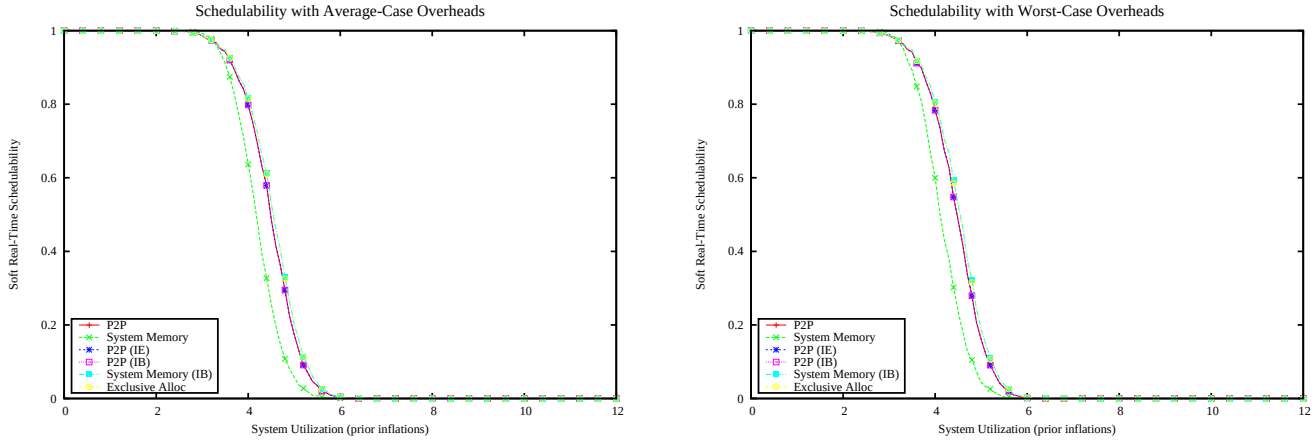

Figure 6331: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

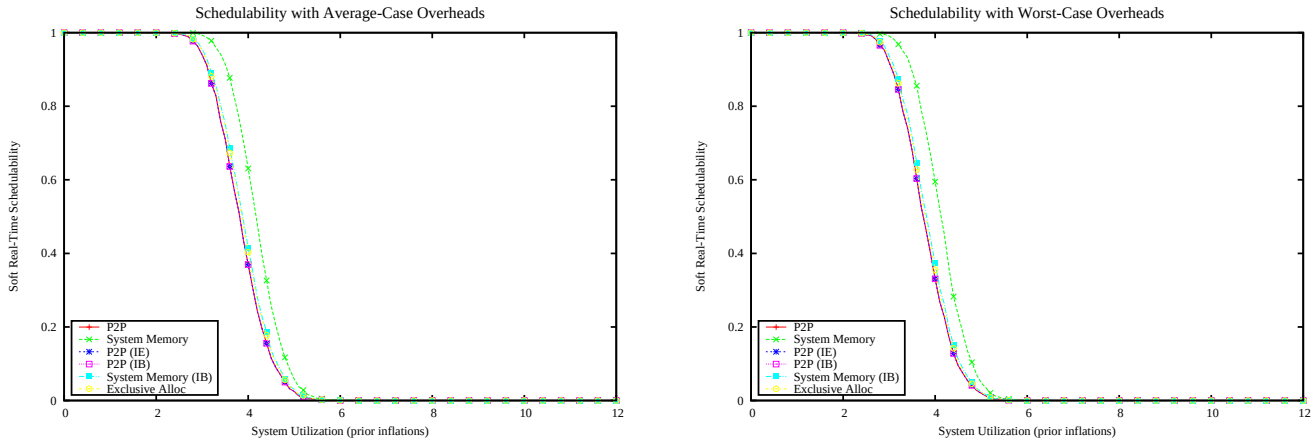

Figure 6332: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

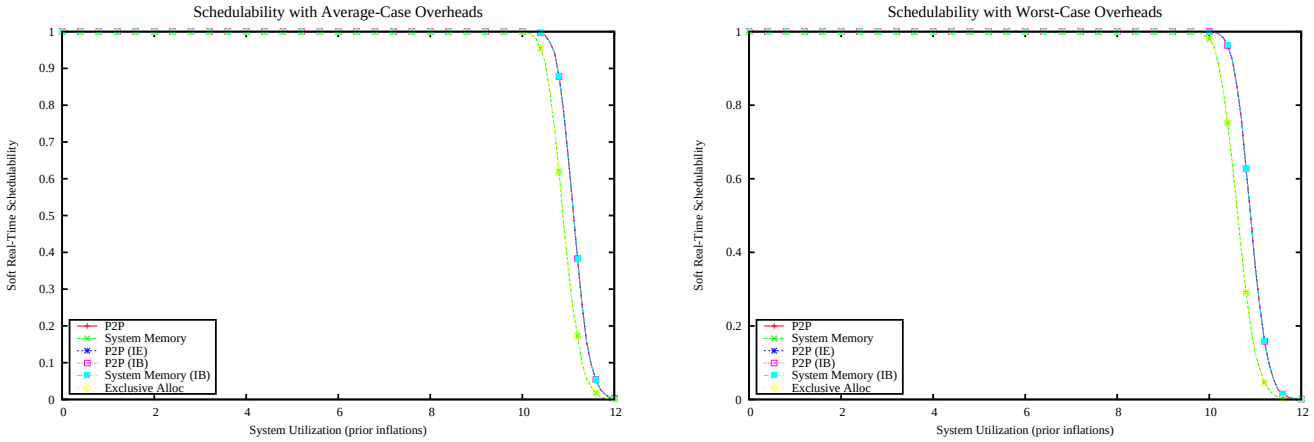

Figure 6333: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

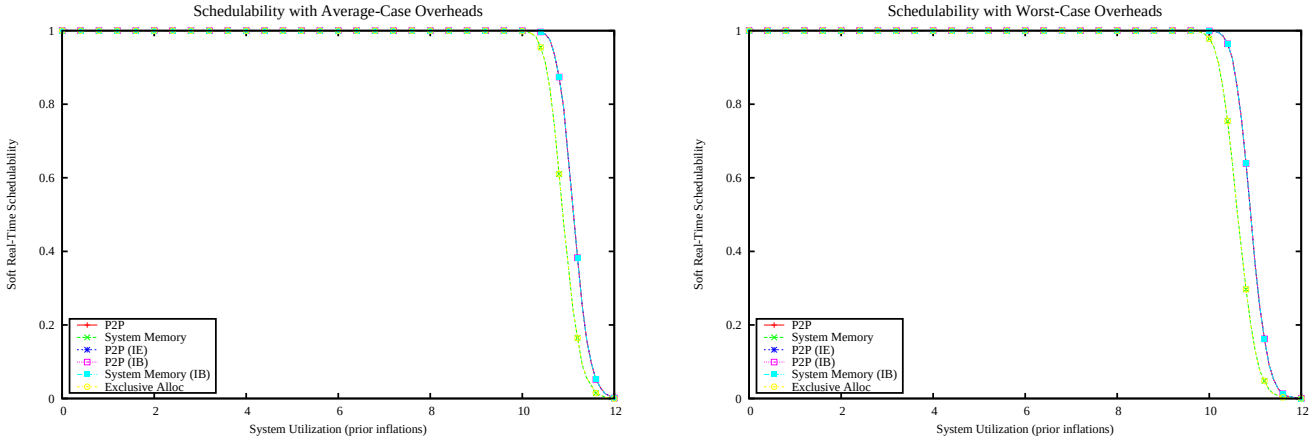

Figure 6334: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

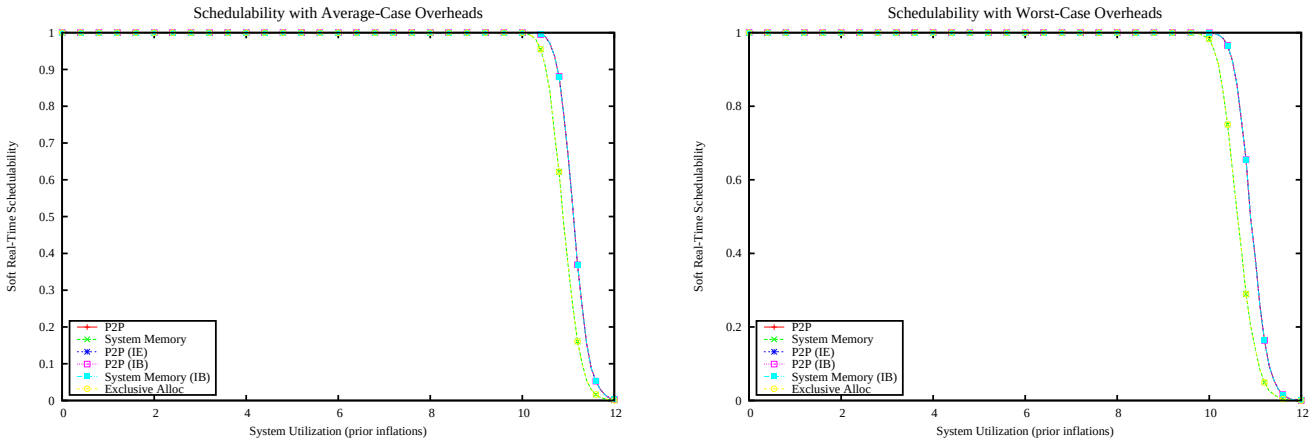

Figure 6335: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

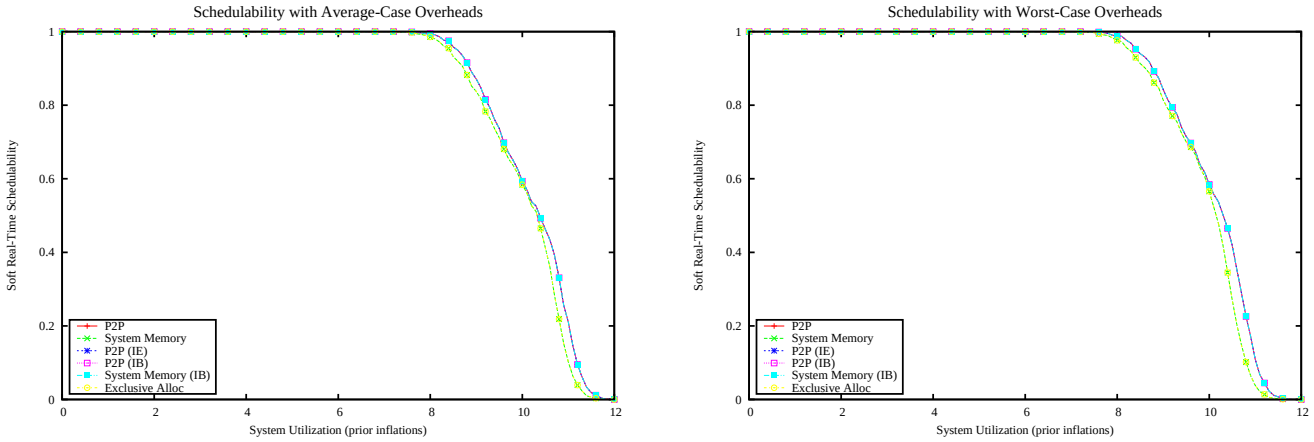

Figure 6336: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

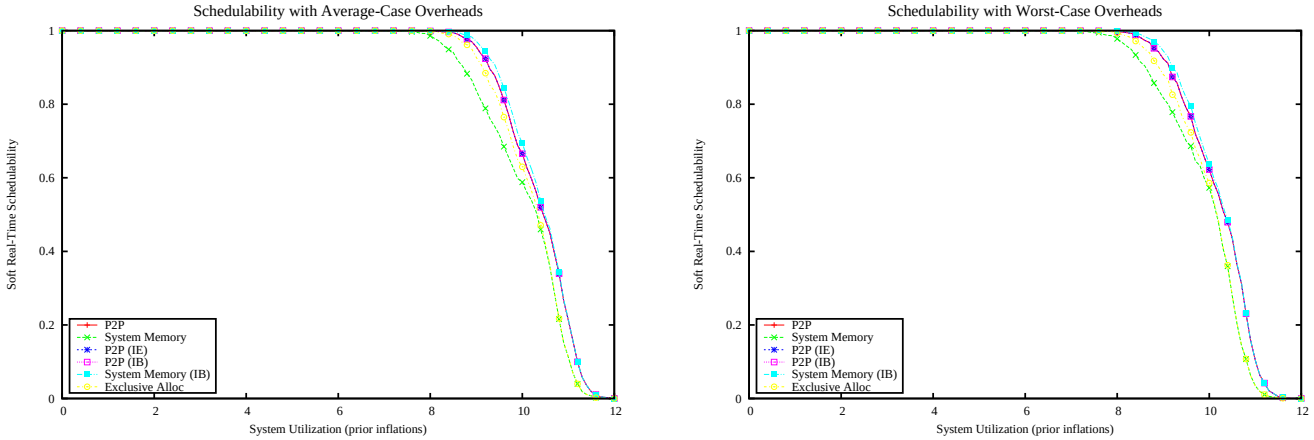

Figure 6337: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

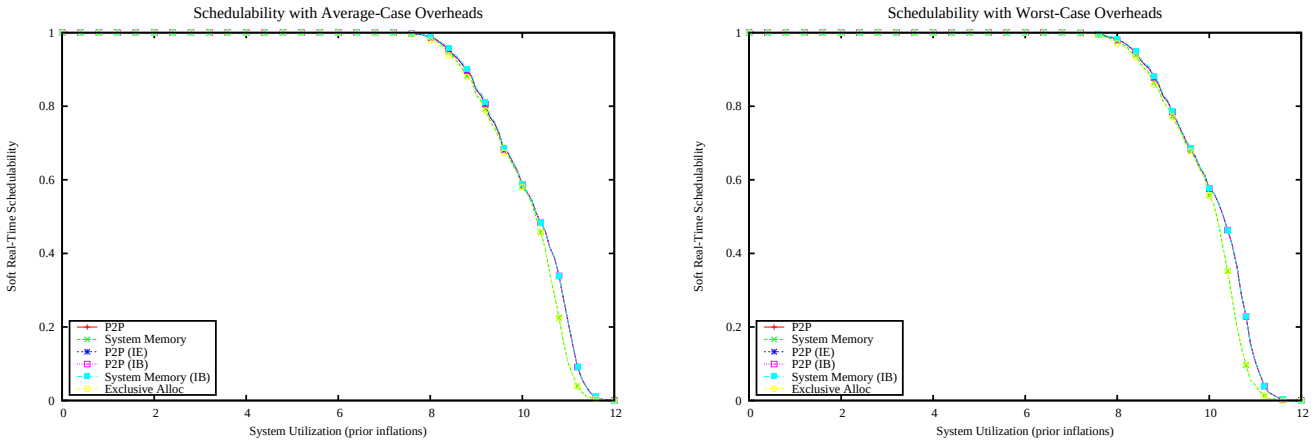

Figure 6338: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

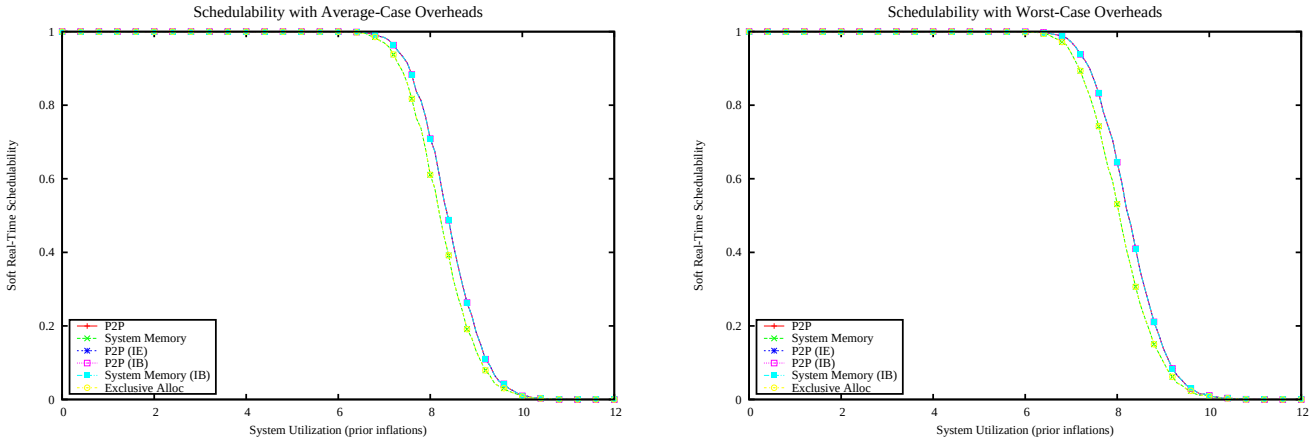

Figure 6339: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

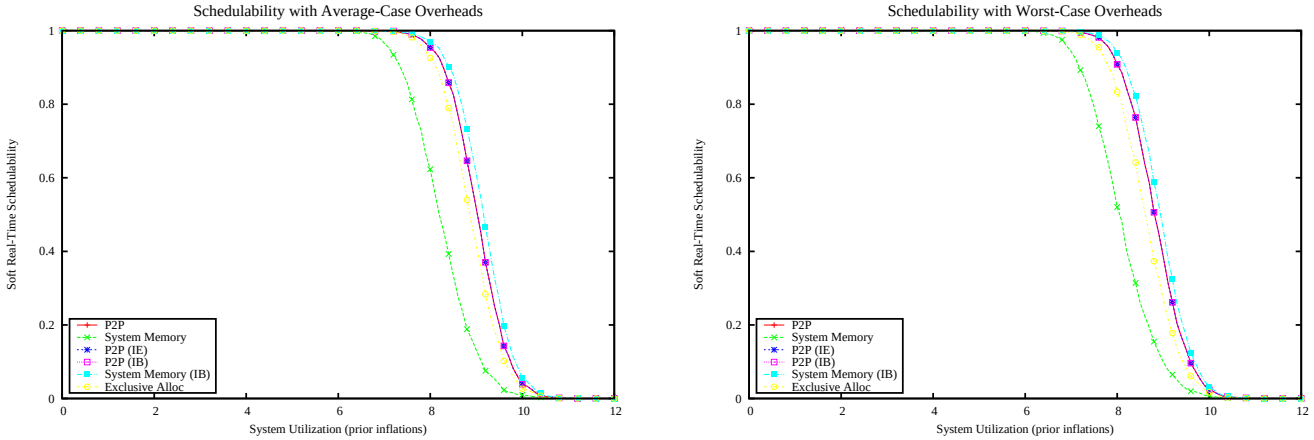

Figure 6340: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

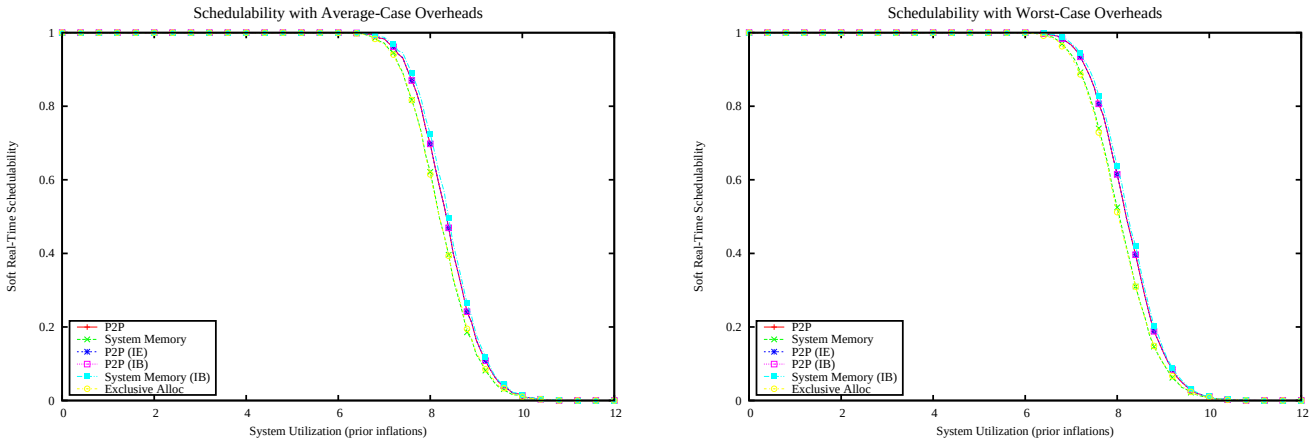

Figure 6341: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

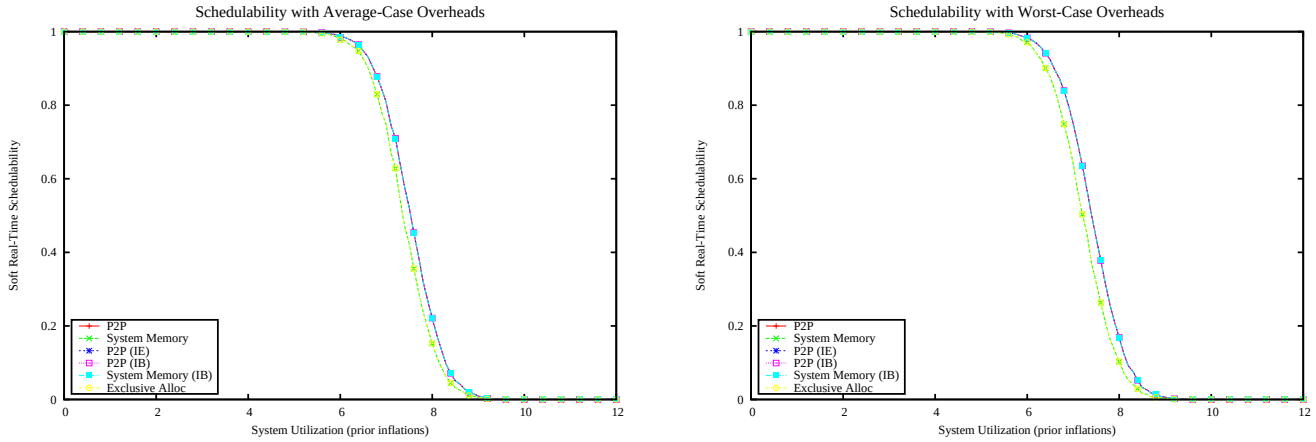

Figure 6342: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

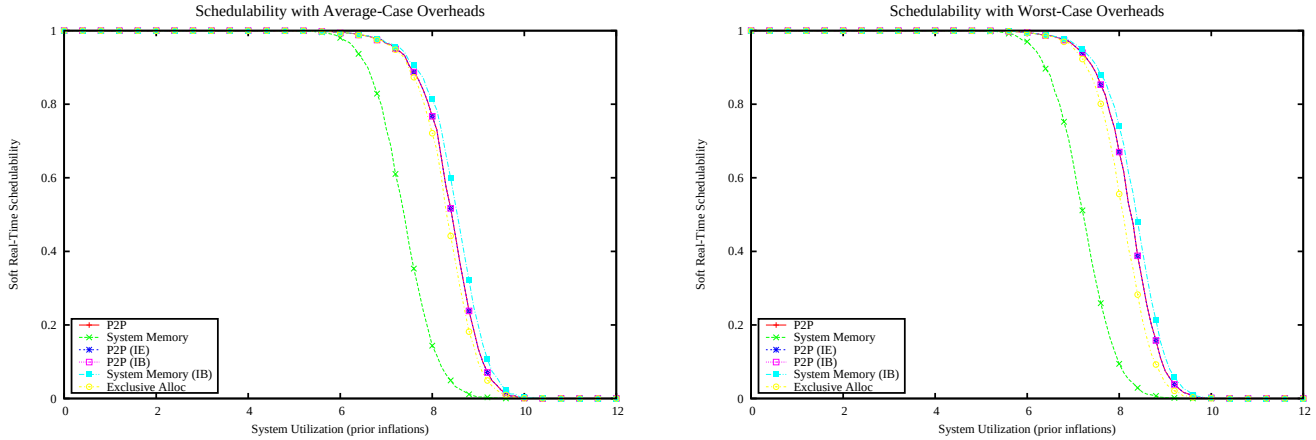

Figure 6343: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

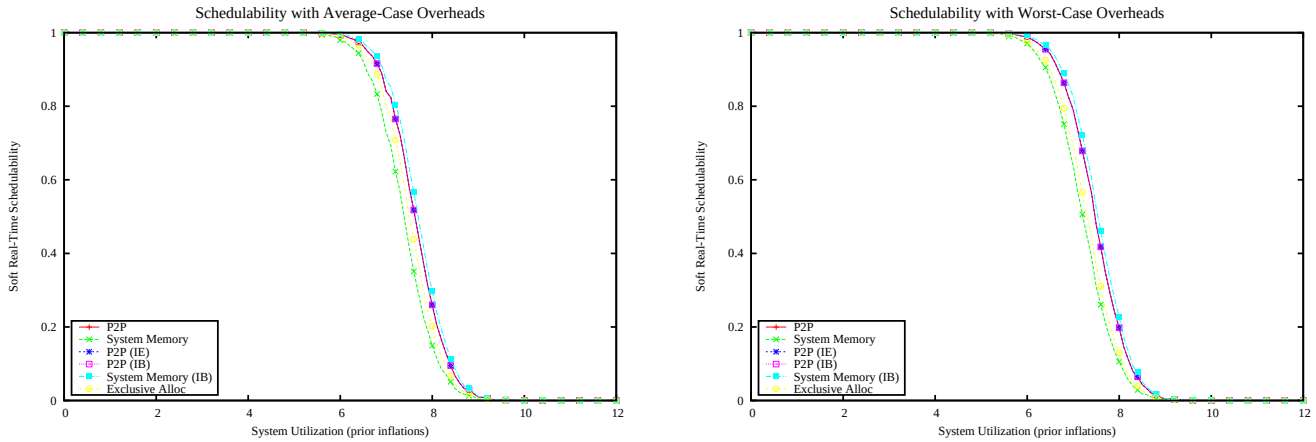

Figure 6344: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

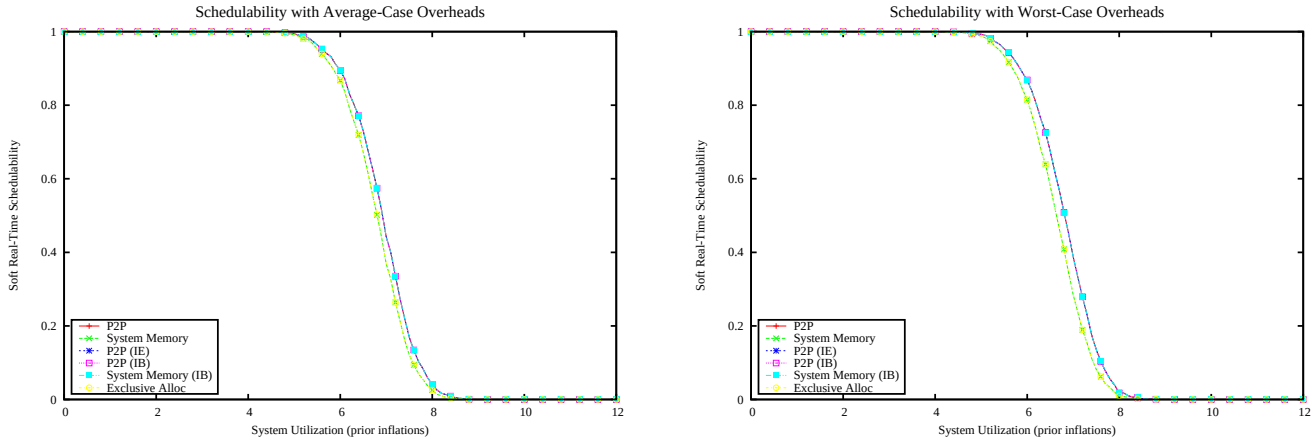

Figure 6345: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

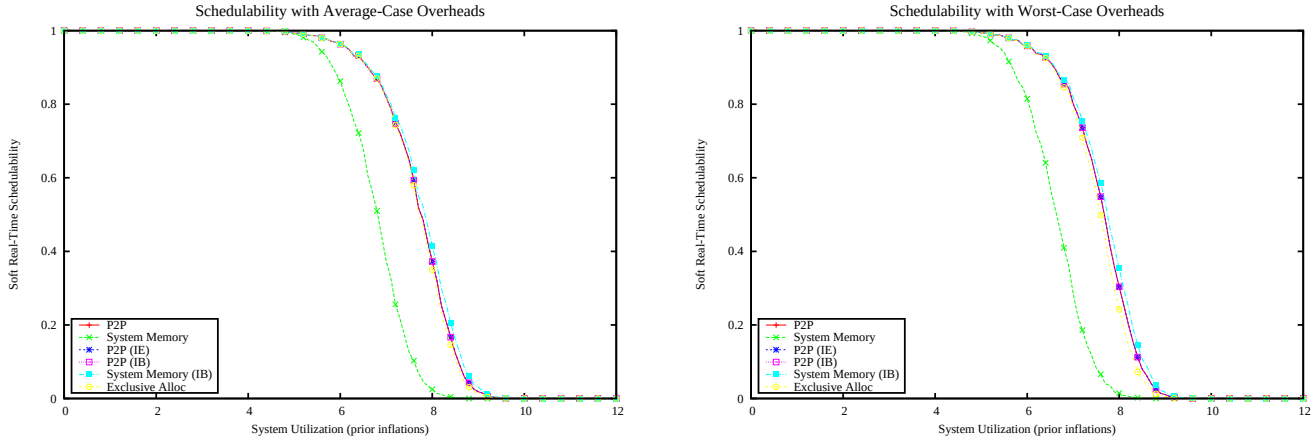

Figure 6346: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

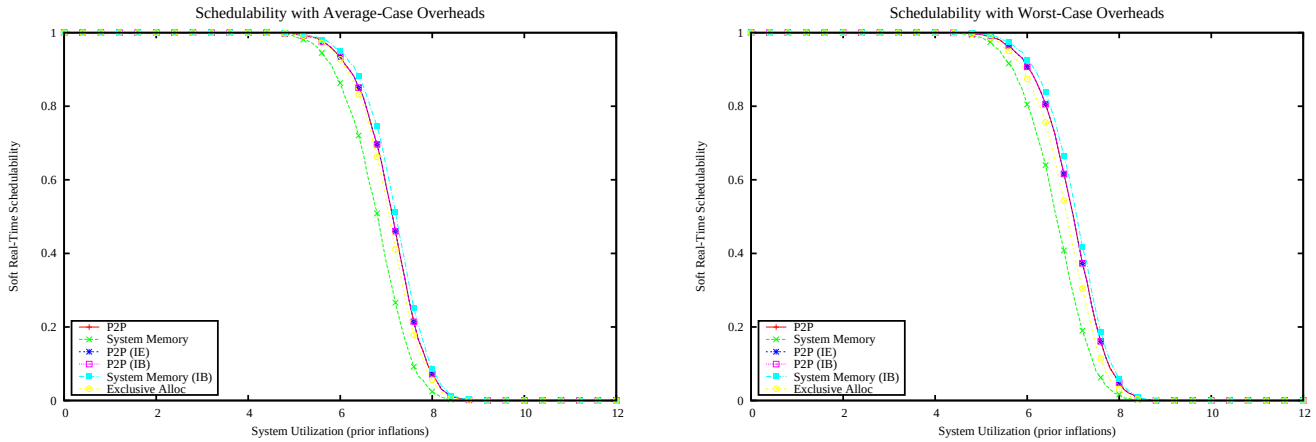

Figure 6347: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

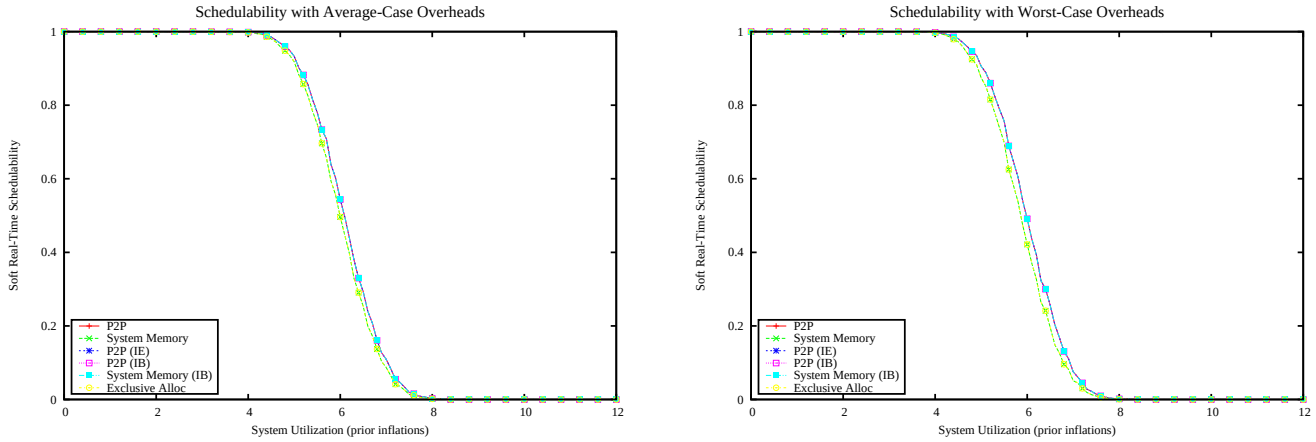

Figure 6348: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

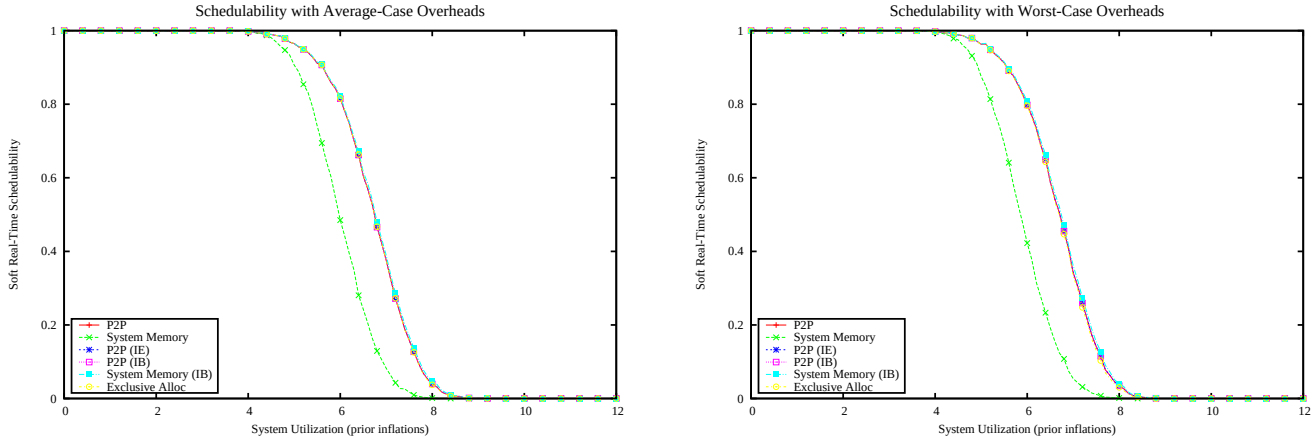

Figure 6349: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

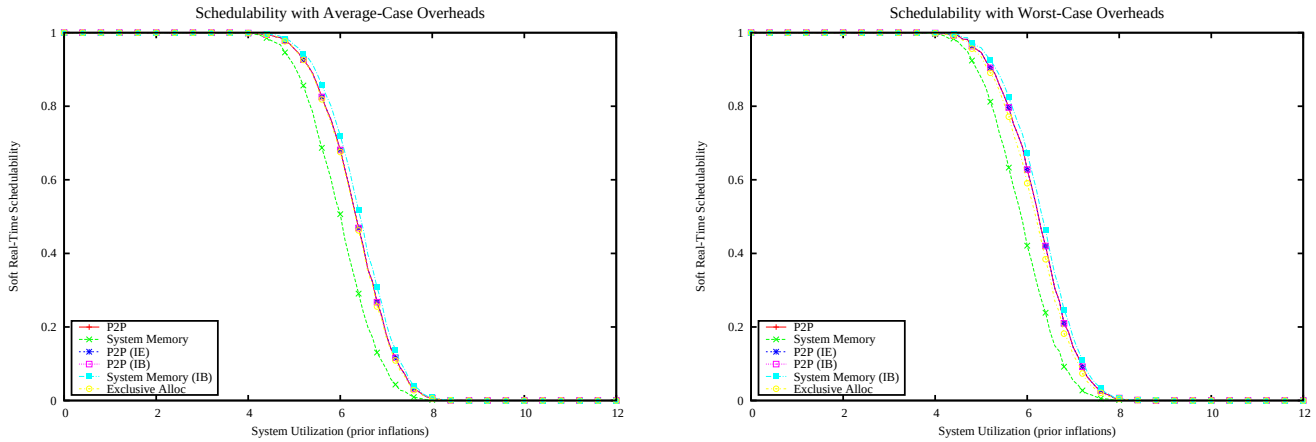

Figure 6350: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

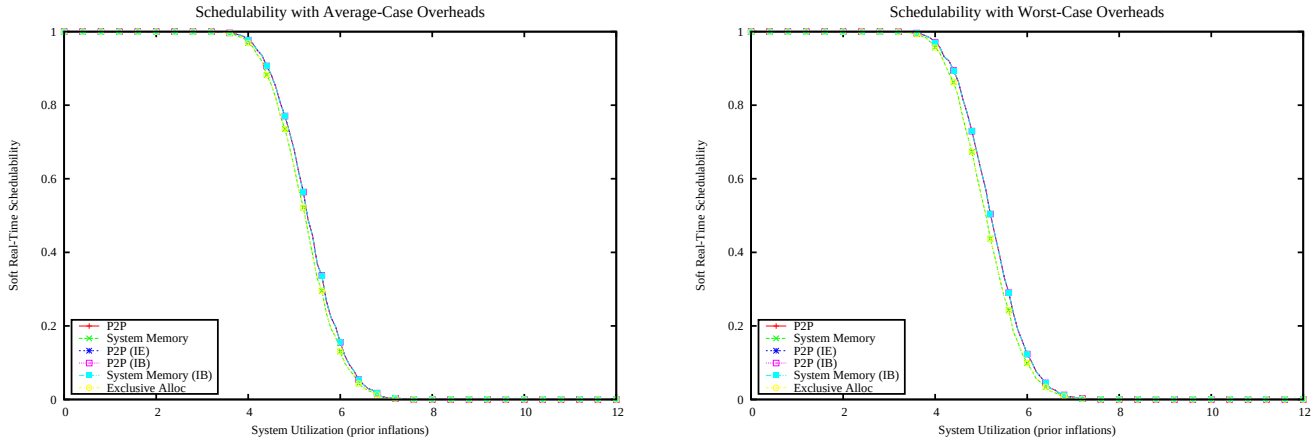

Figure 6351: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

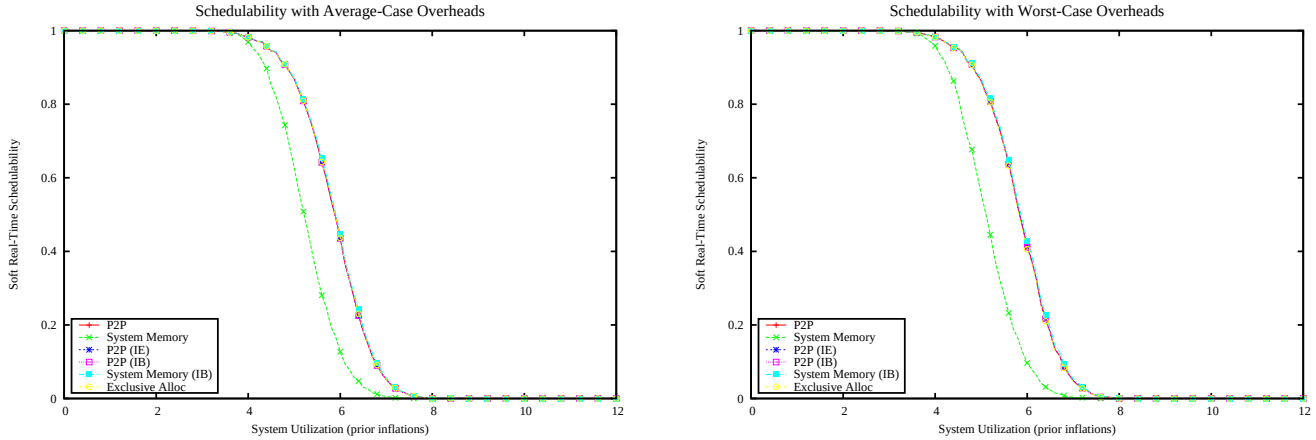

Figure 6352: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

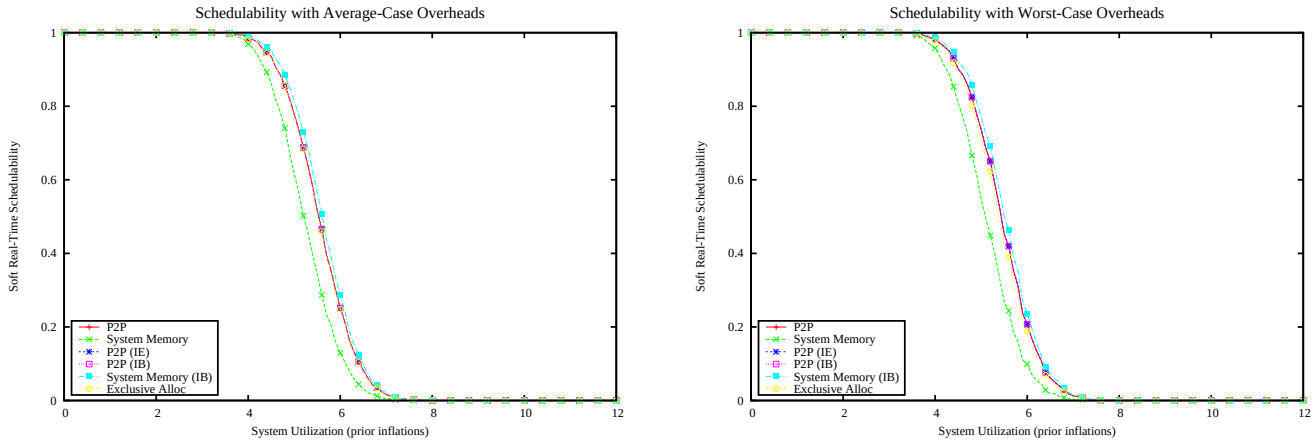

Figure 6353: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

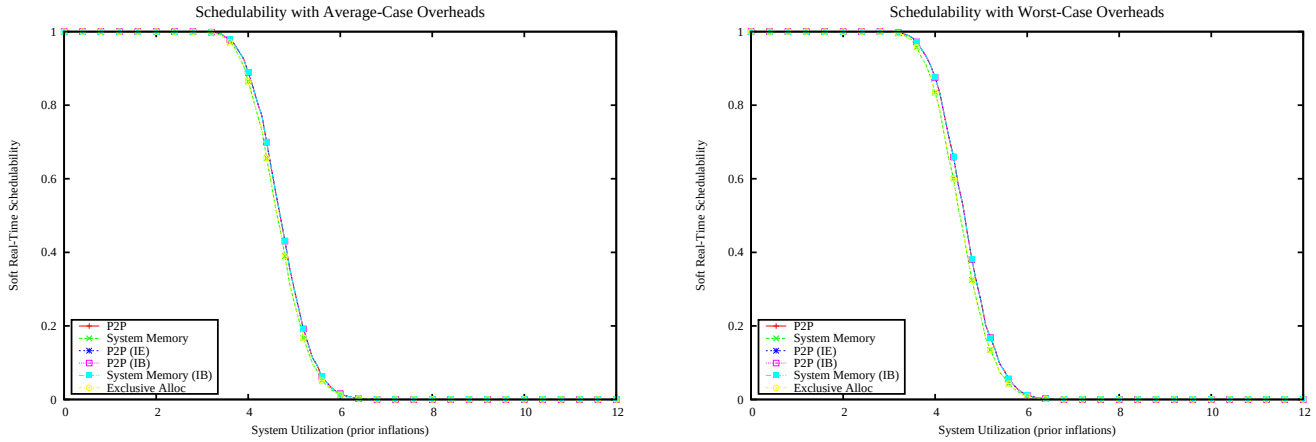

Figure 6354: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

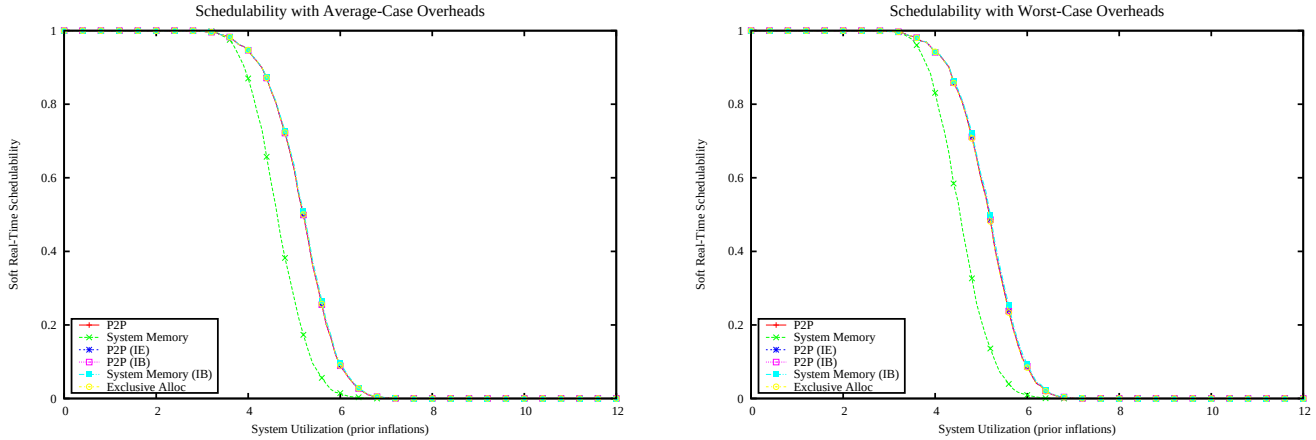

Figure 6355: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

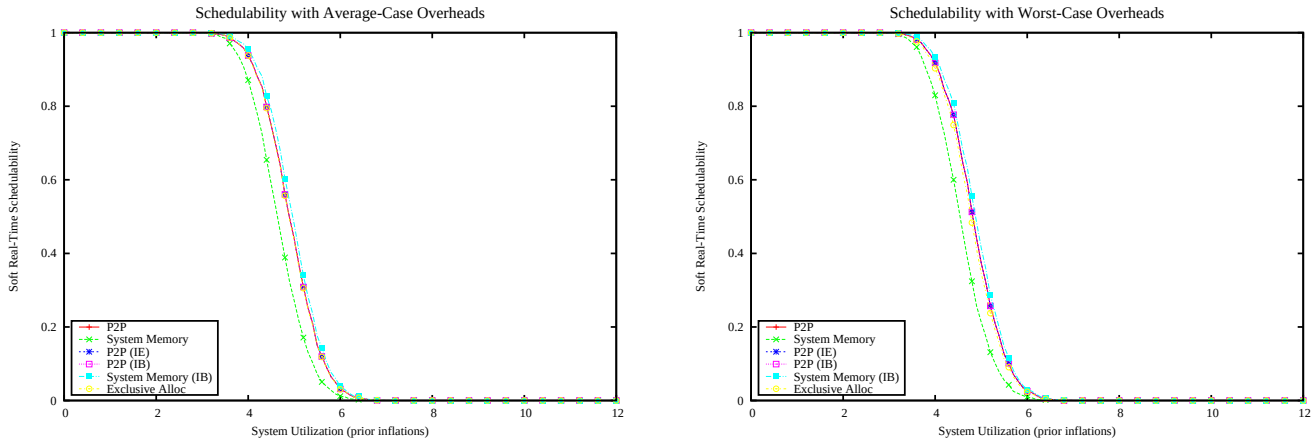

Figure 6356: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

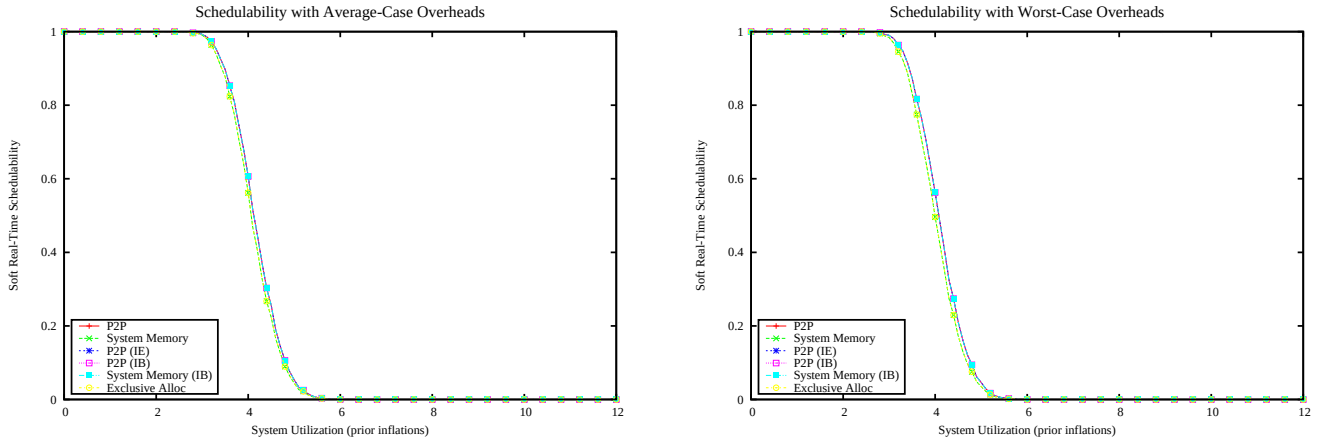

Figure 6357: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

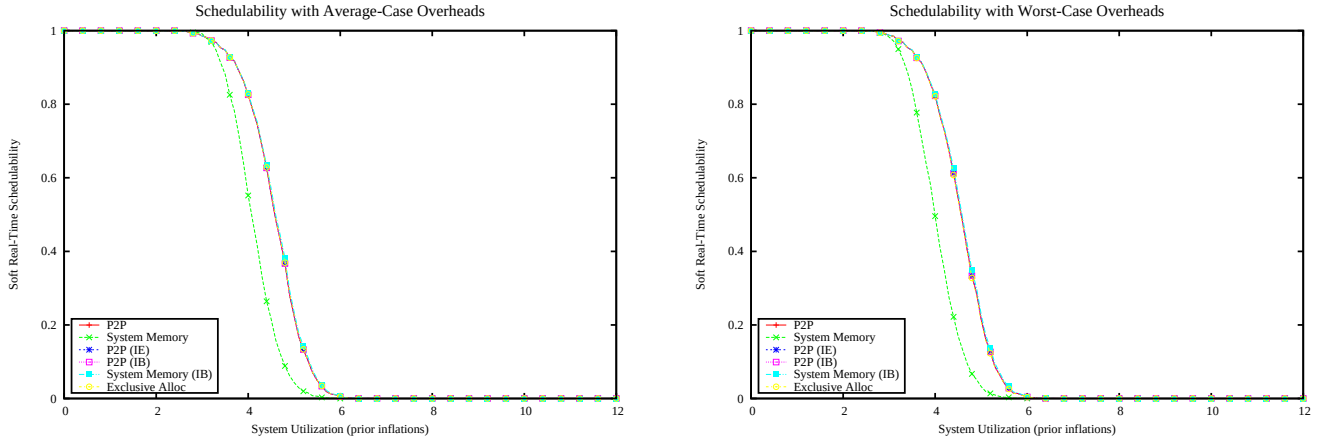

Figure 6358: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

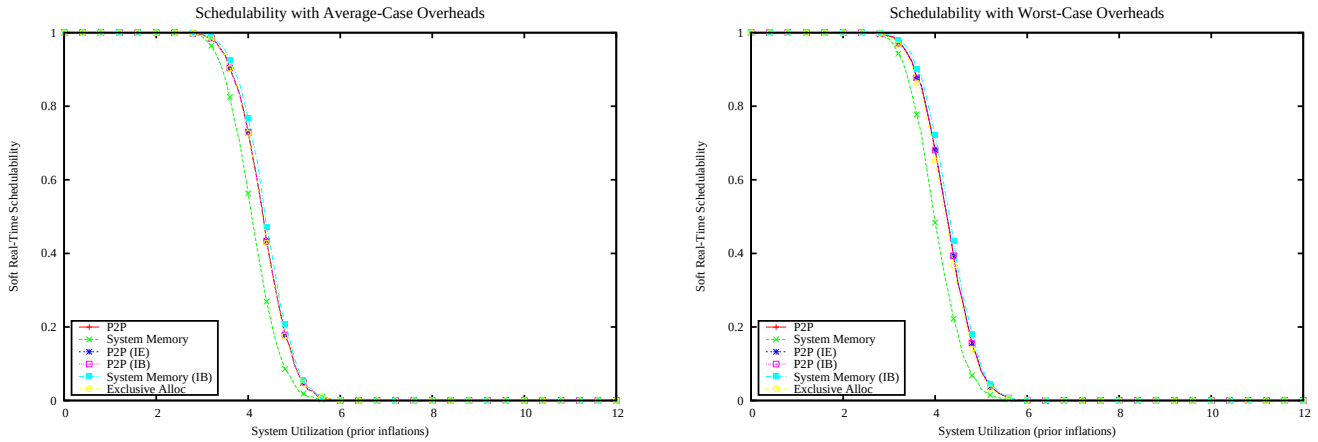

Figure 6359: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

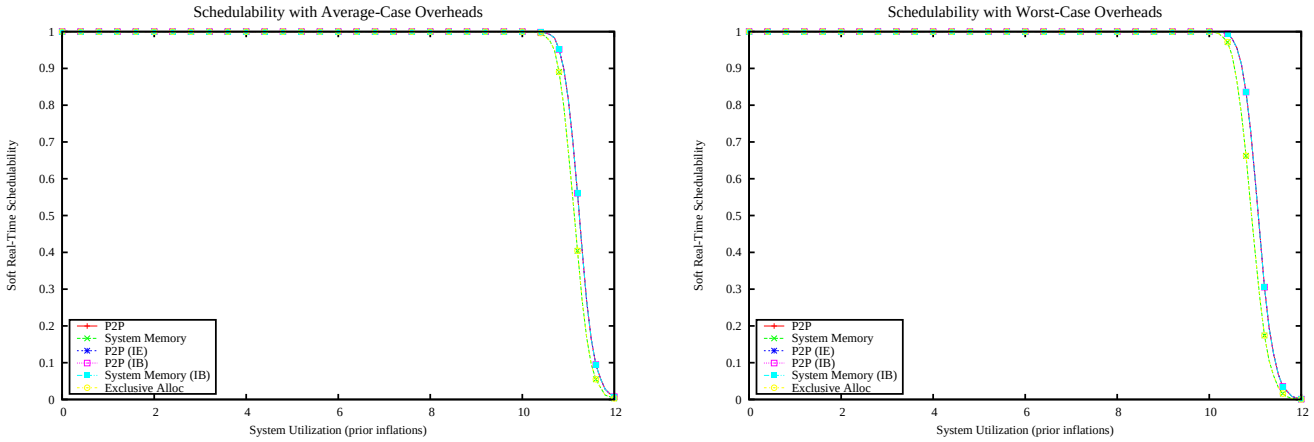

Figure 6360: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

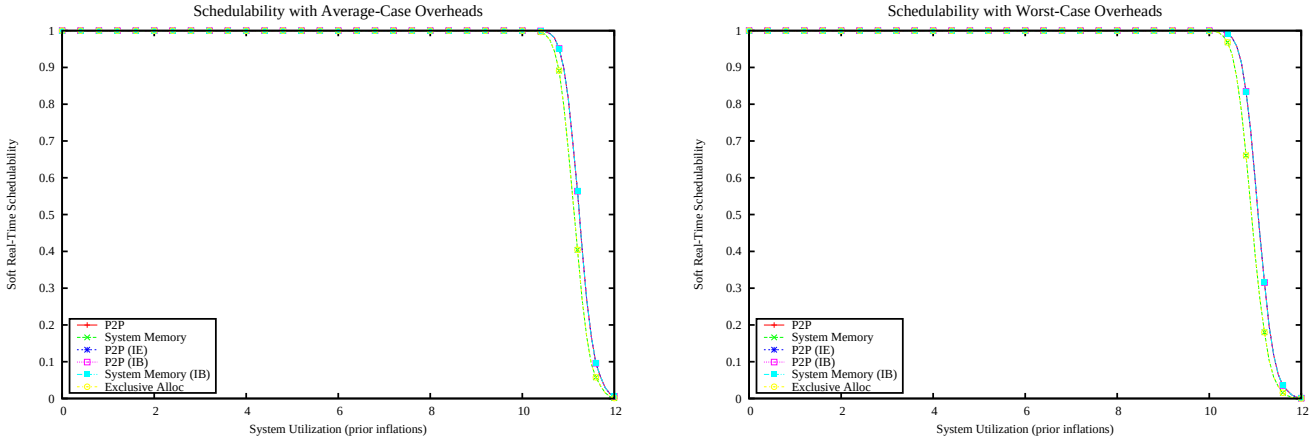

Figure 6361: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

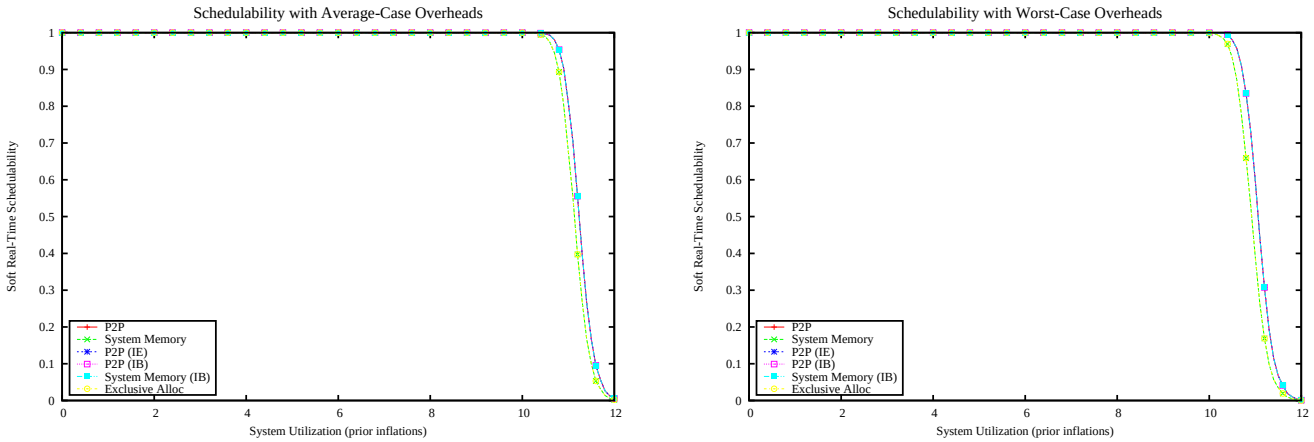

Figure 6362: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

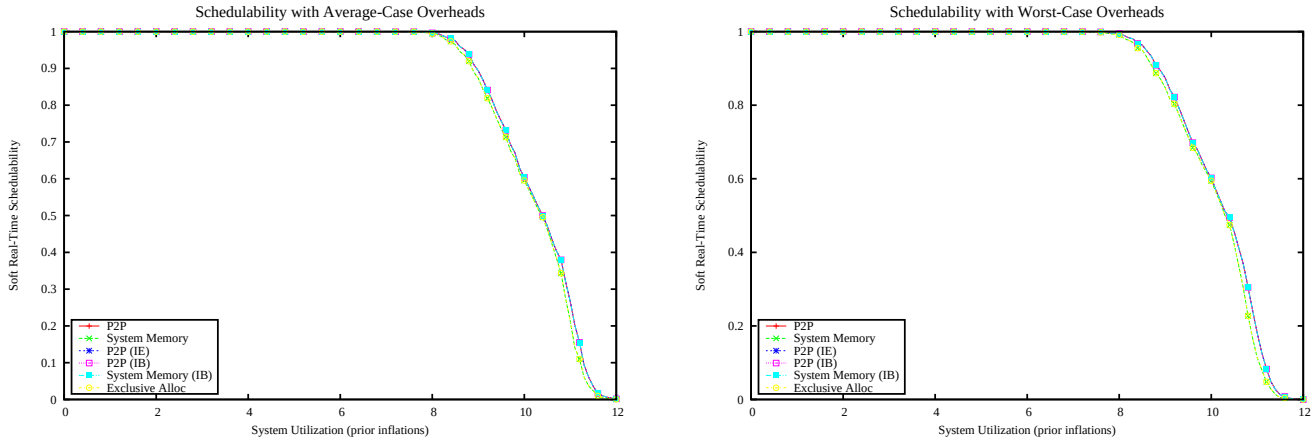

Figure 6363: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

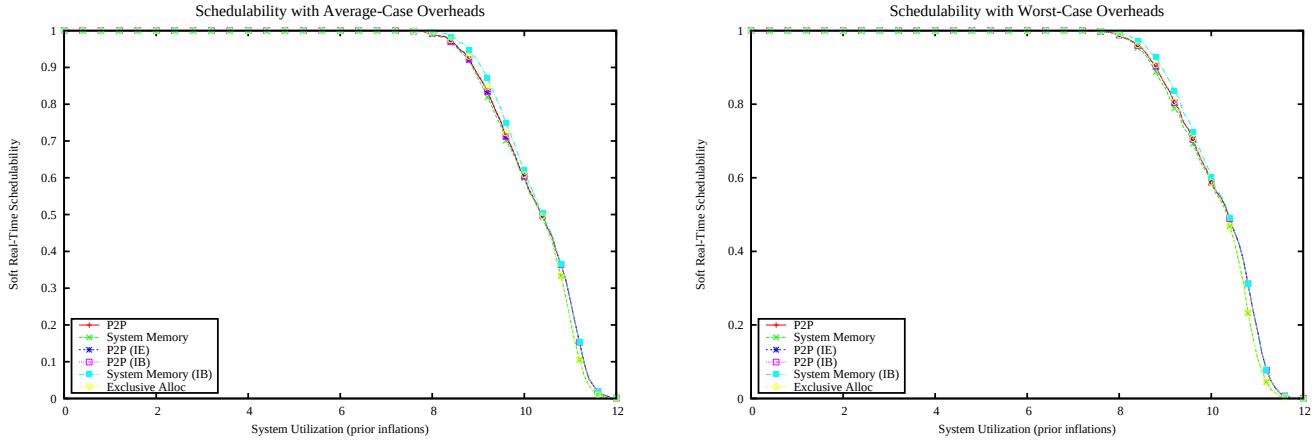

Figure 6364: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

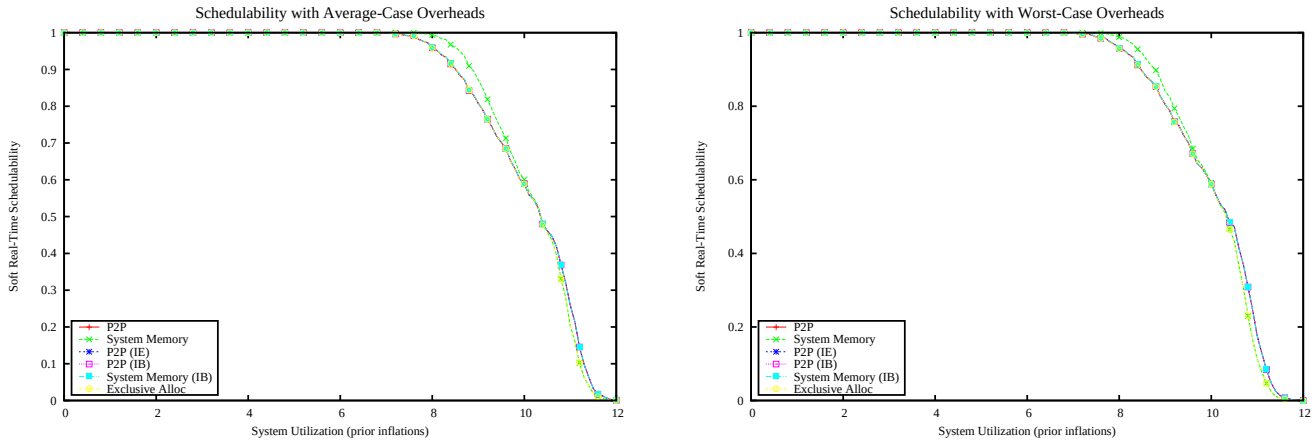

Figure 6365: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

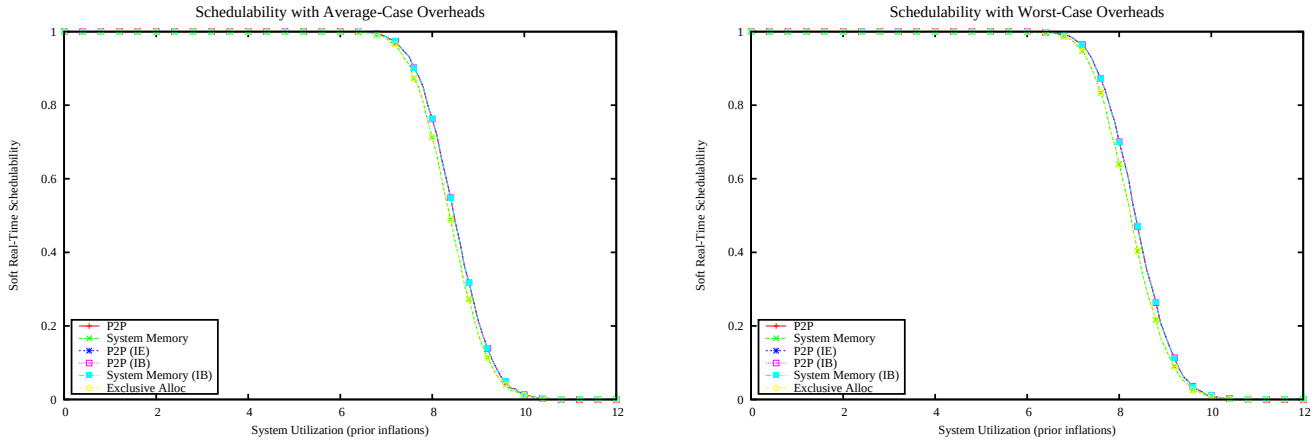

Figure 6366: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

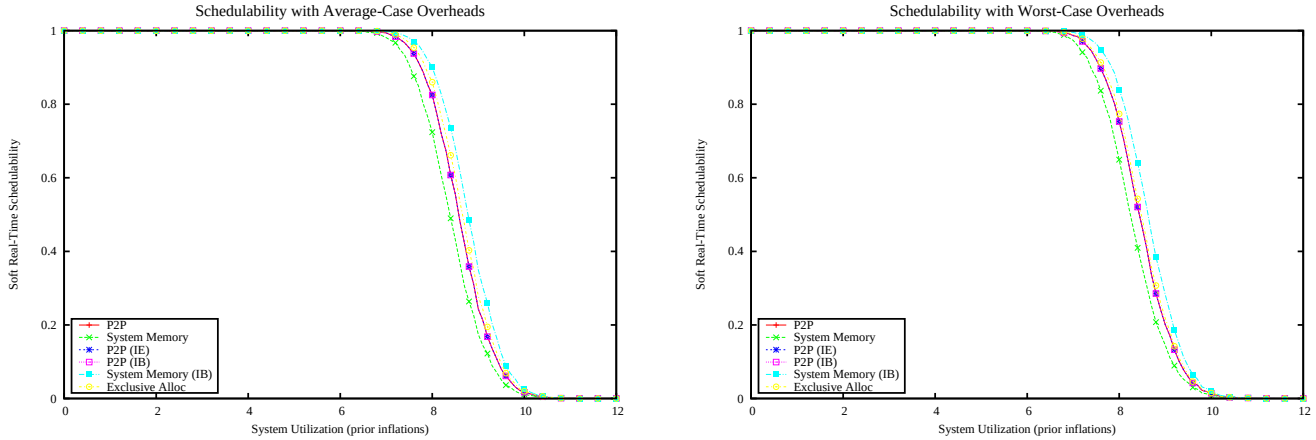

Figure 6367: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

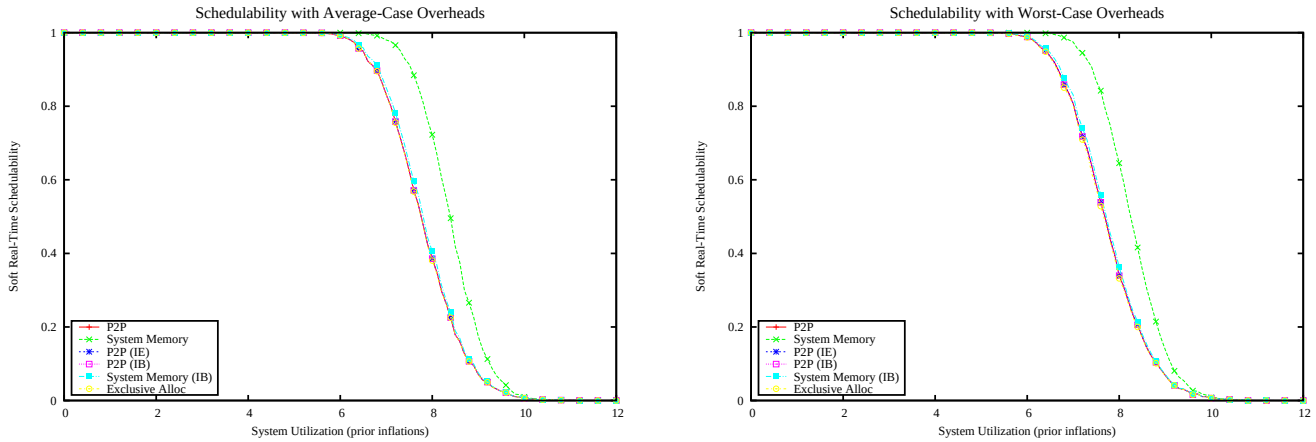

Figure 6368: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

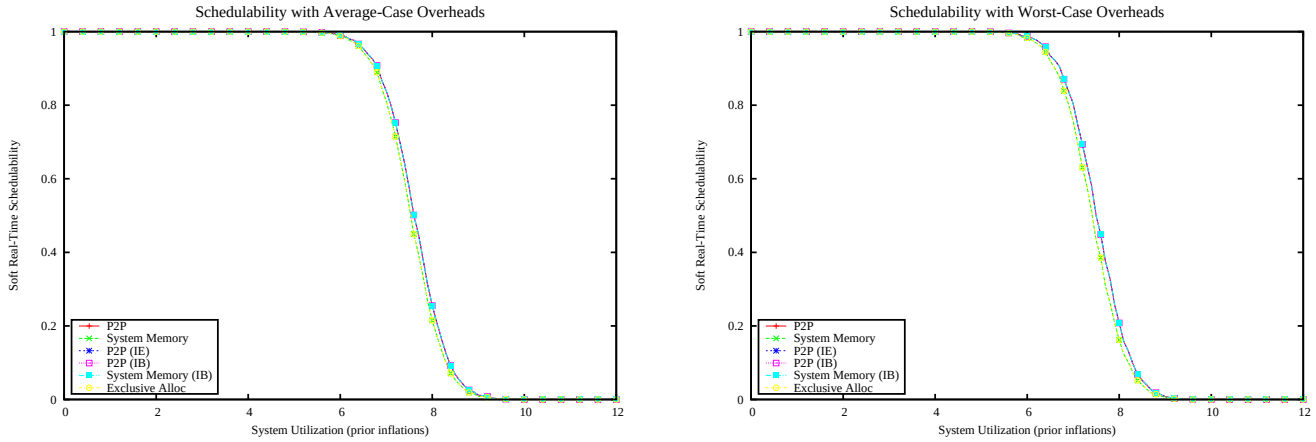

Figure 6369: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

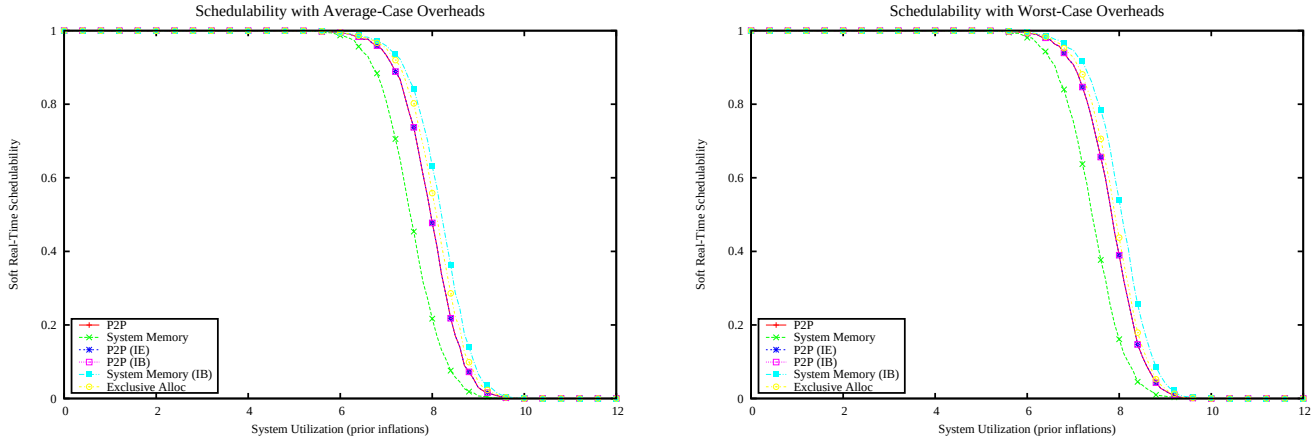

Figure 6370: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

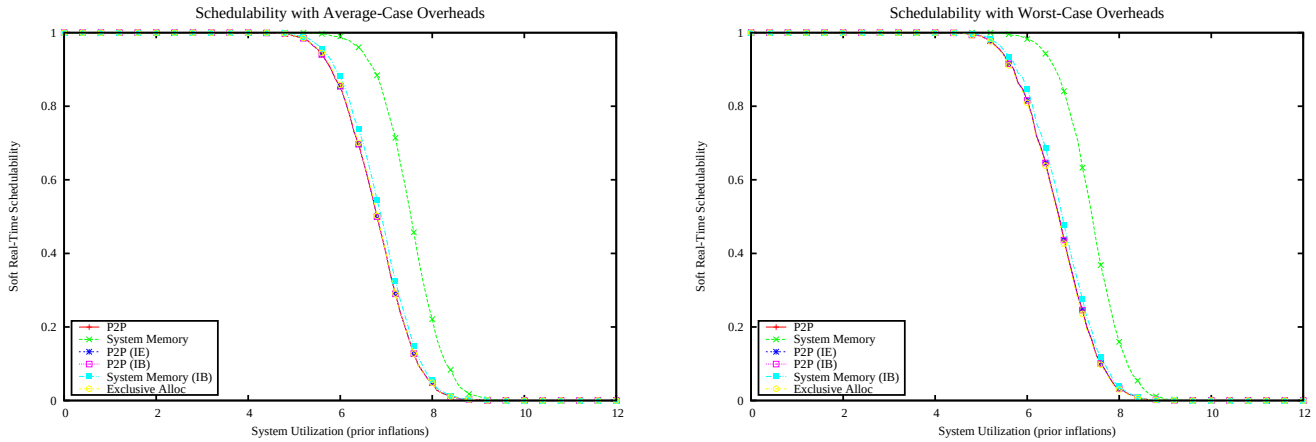

Figure 6371: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

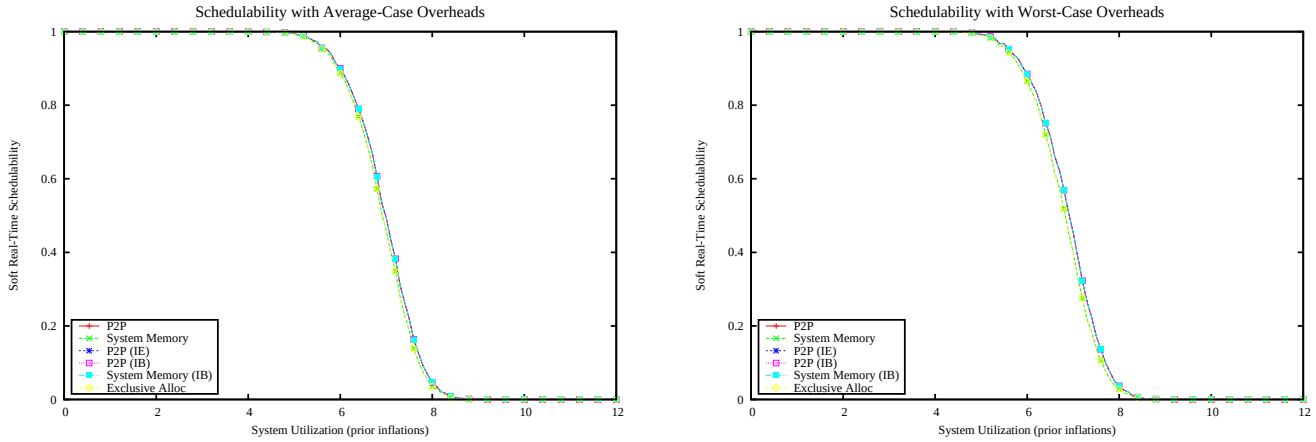

Figure 6372: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

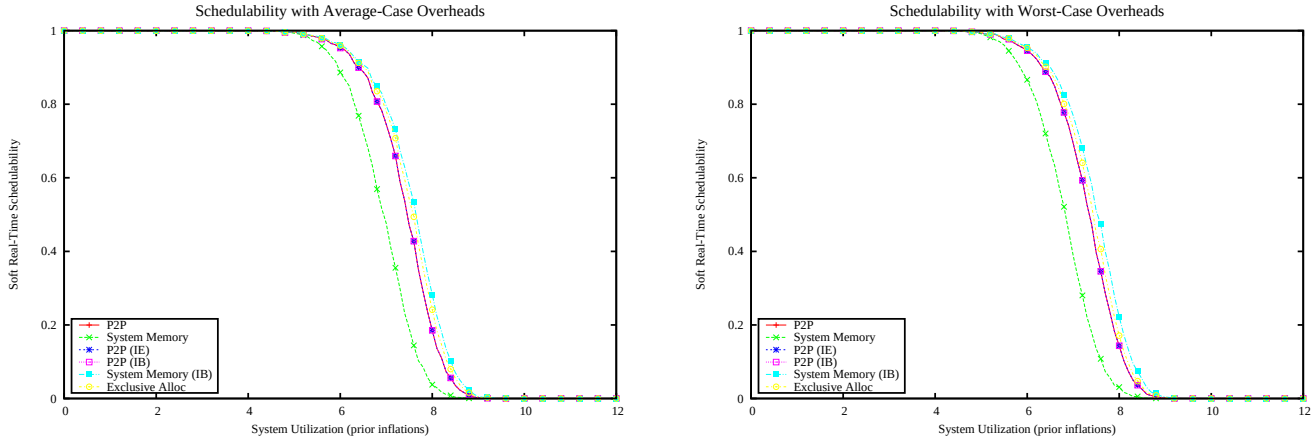

Figure 6373: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

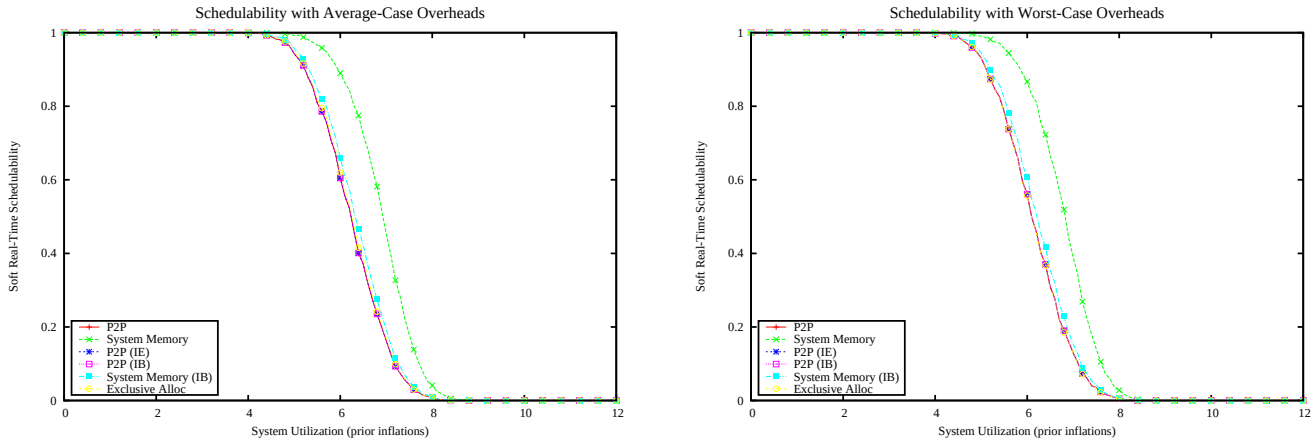

Figure 6374: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

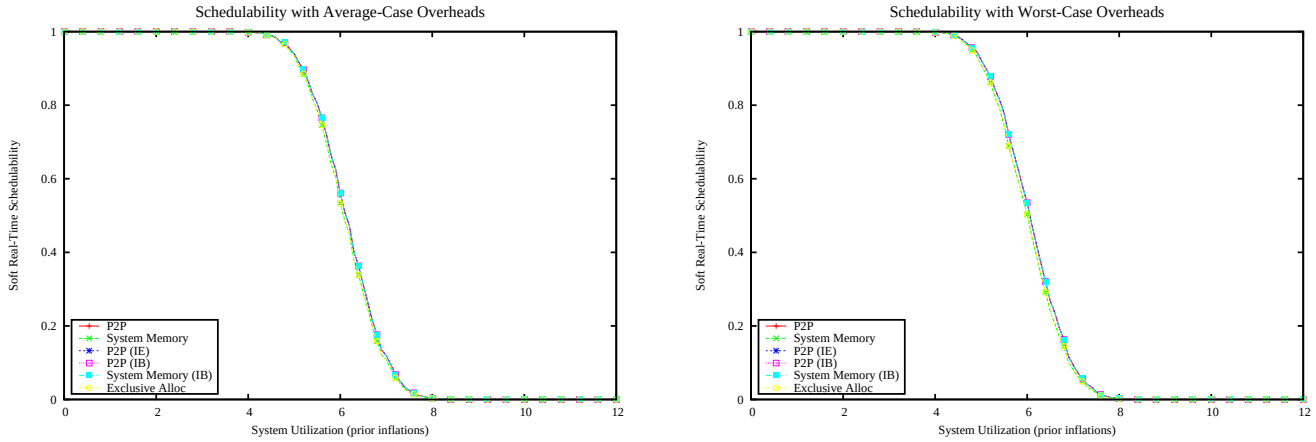

Figure 6375: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

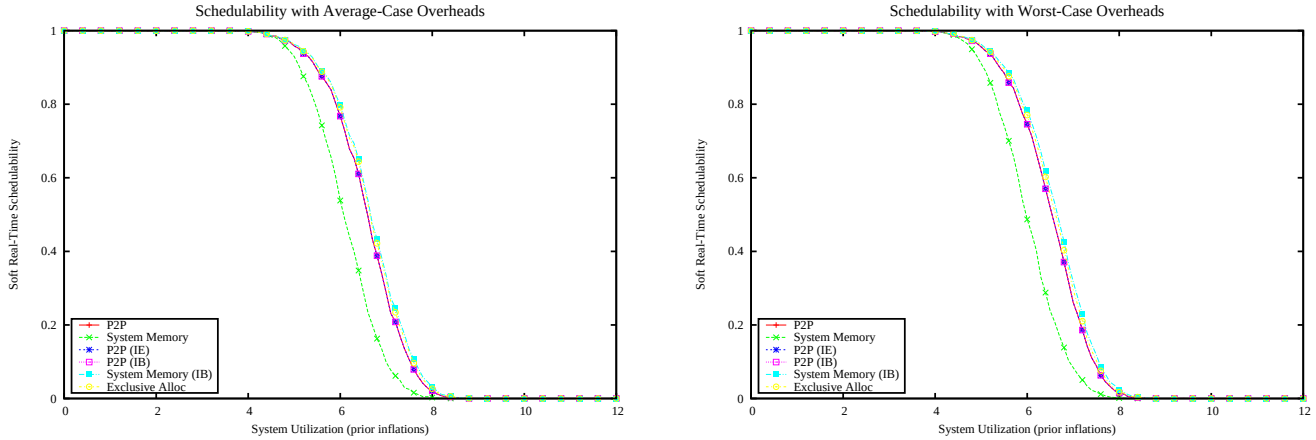

Figure 6376: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

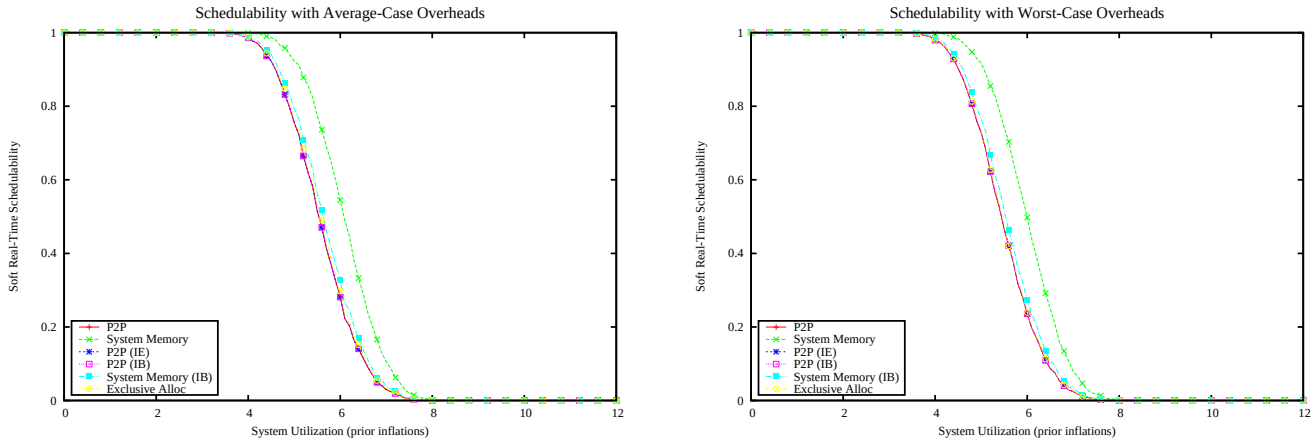

Figure 6377: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

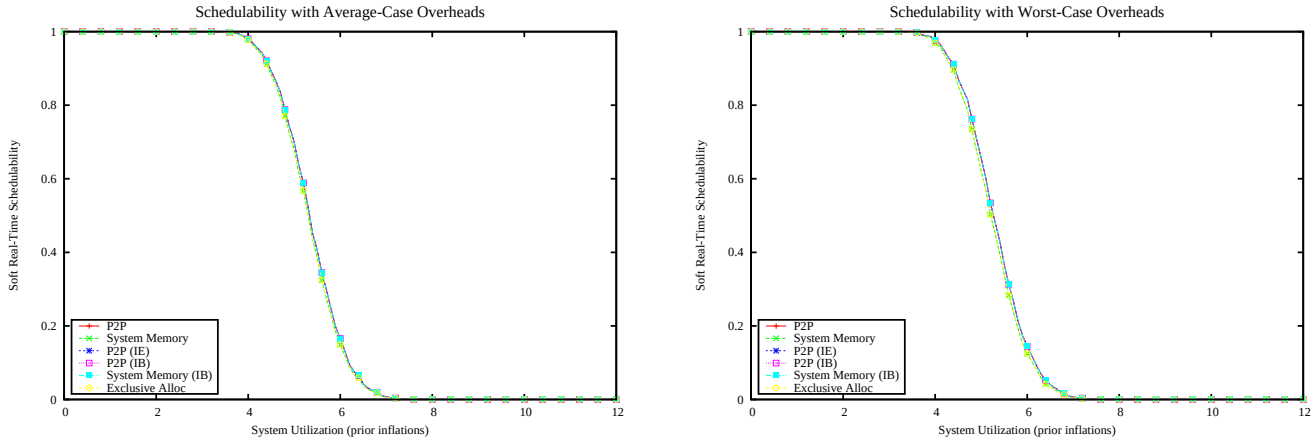

Figure 6378: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

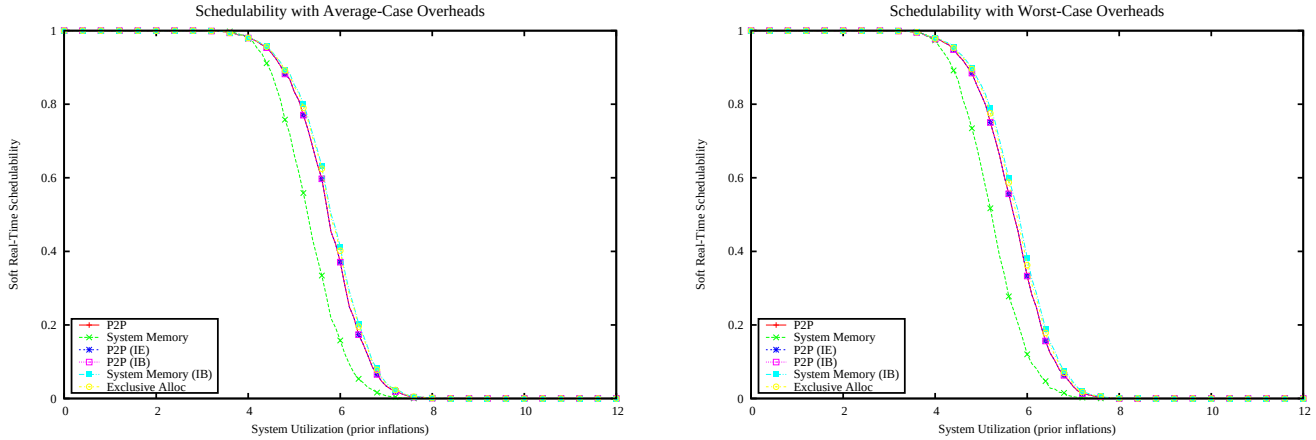

Figure 6379: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

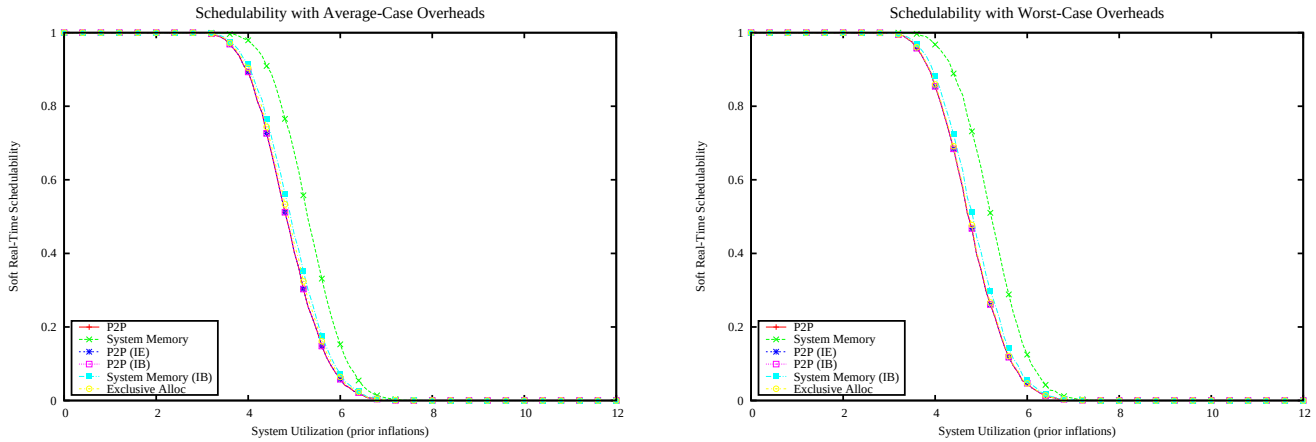

Figure 6380: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

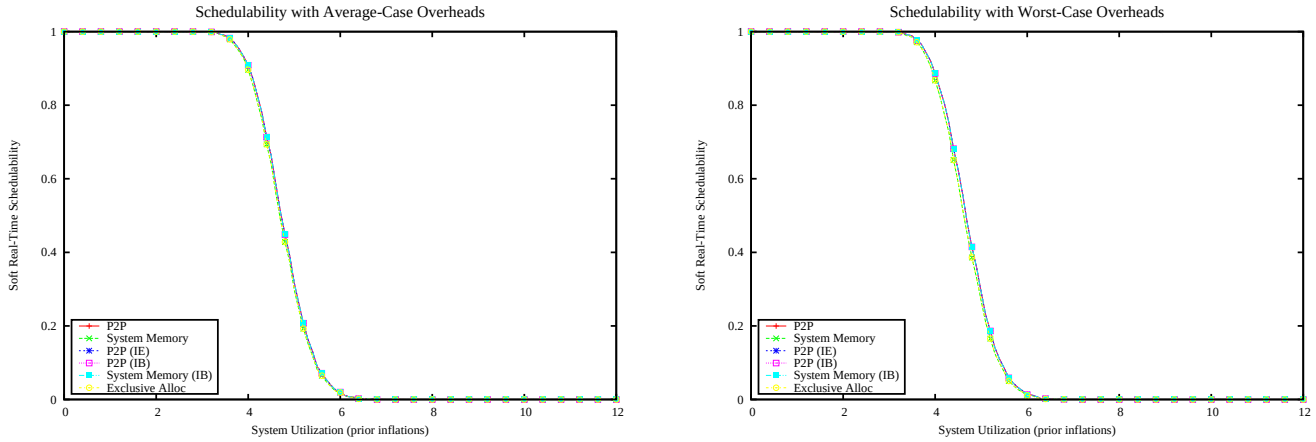

Figure 6381: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

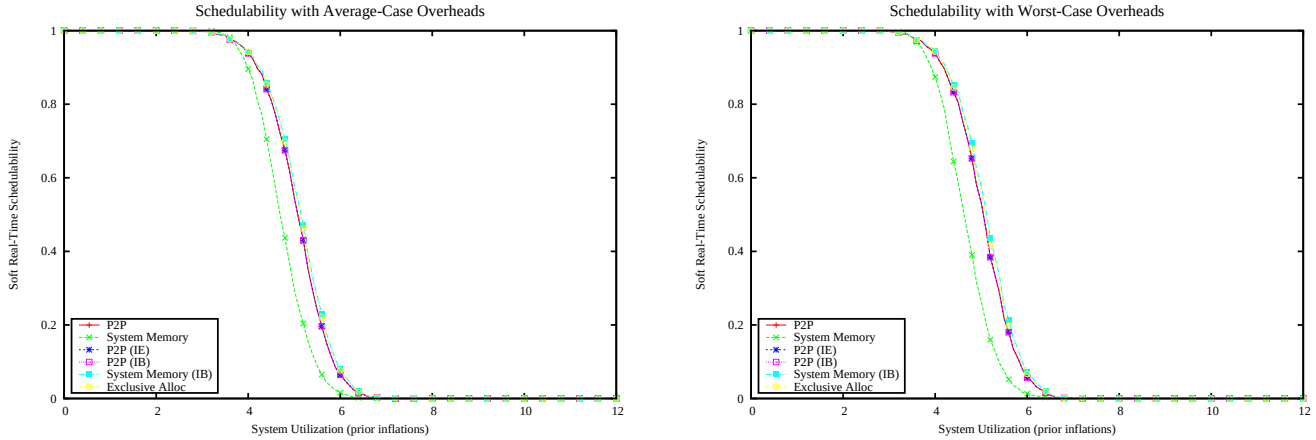

Figure 6382: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

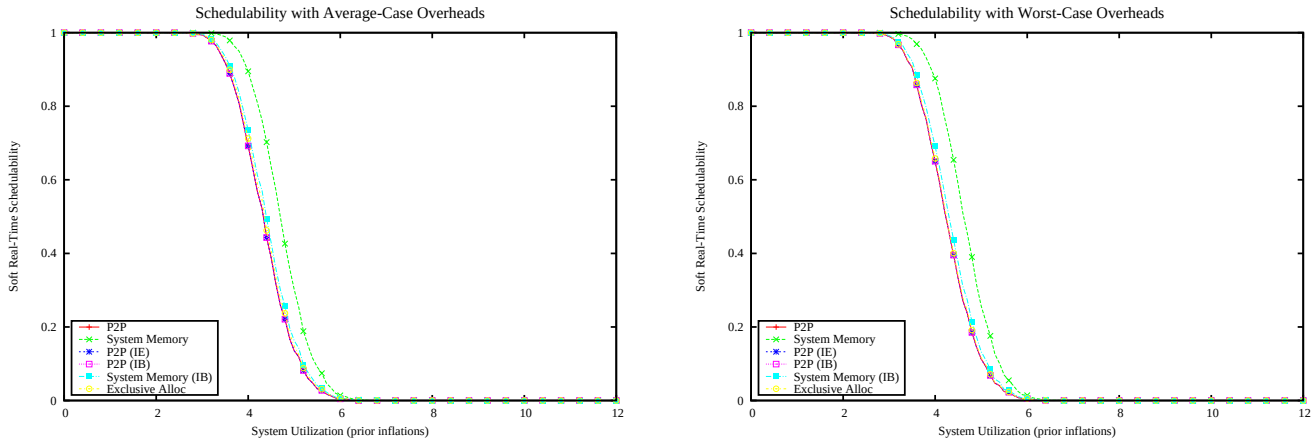

Figure 6383: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

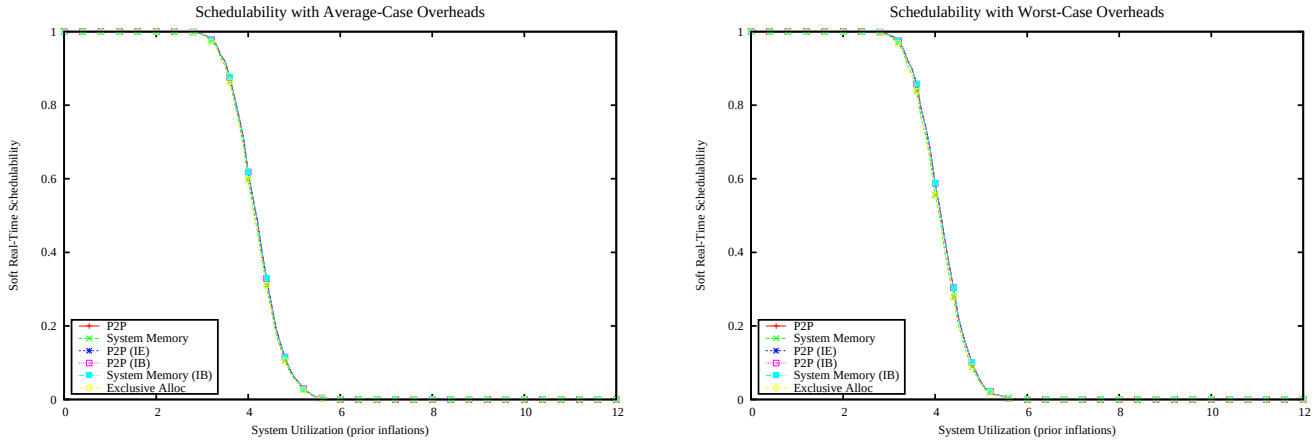

Figure 6384: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

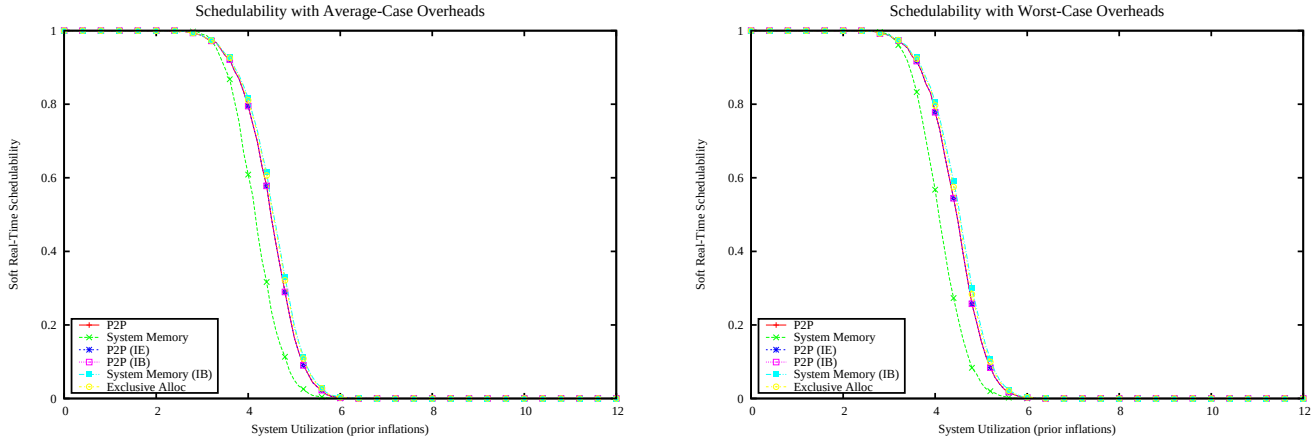

Figure 6385: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

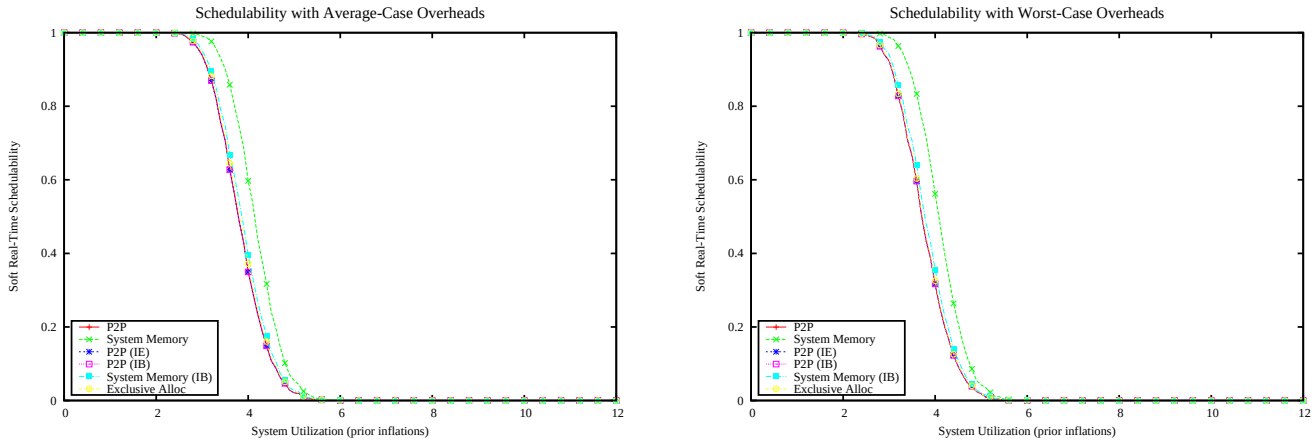

Figure 6386: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

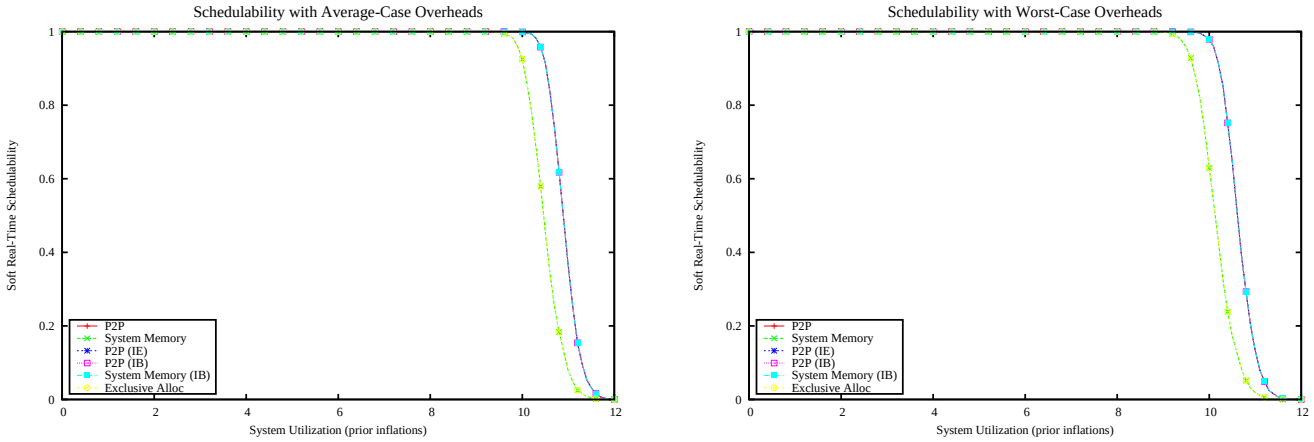

Figure 6387: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

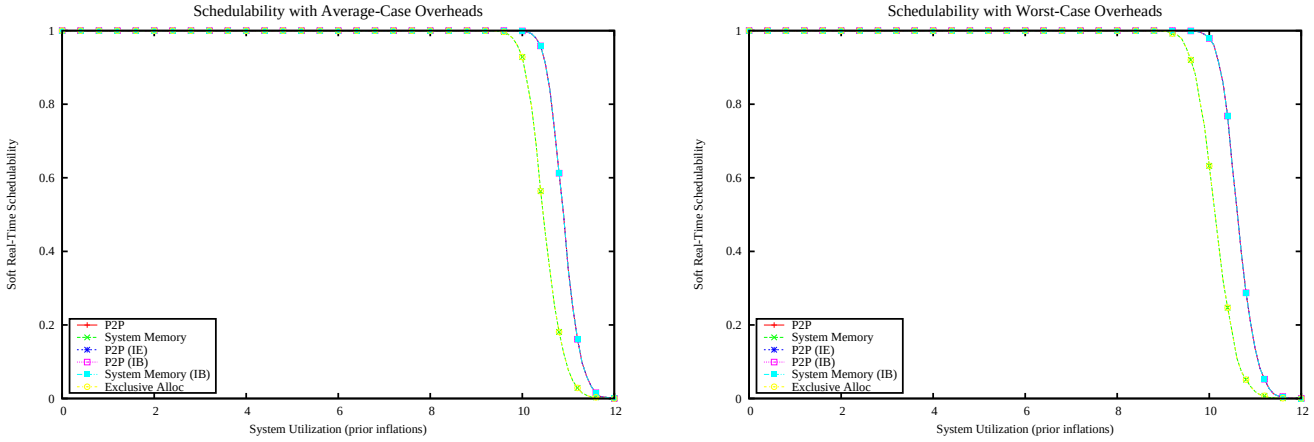

Figure 6388: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

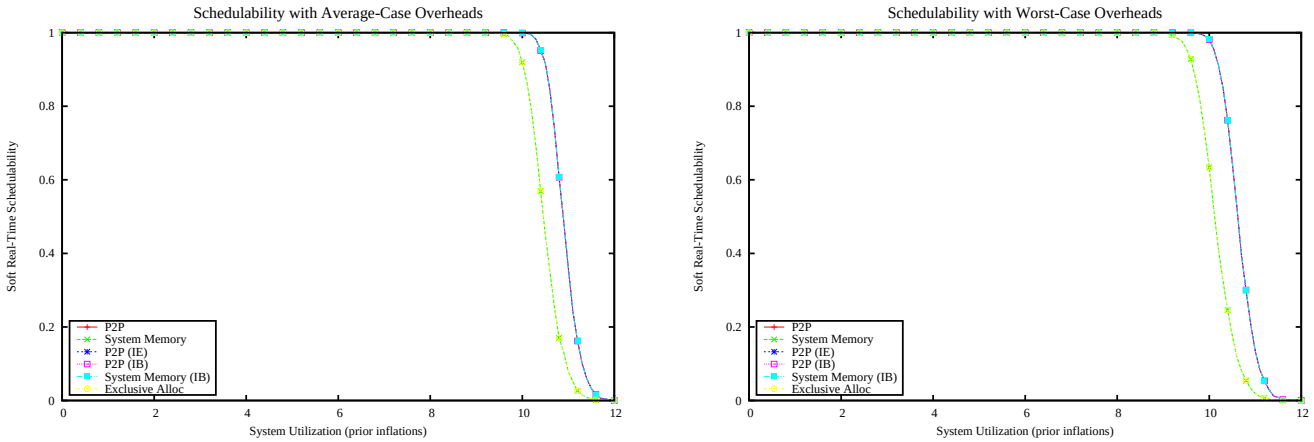

Figure 6389: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

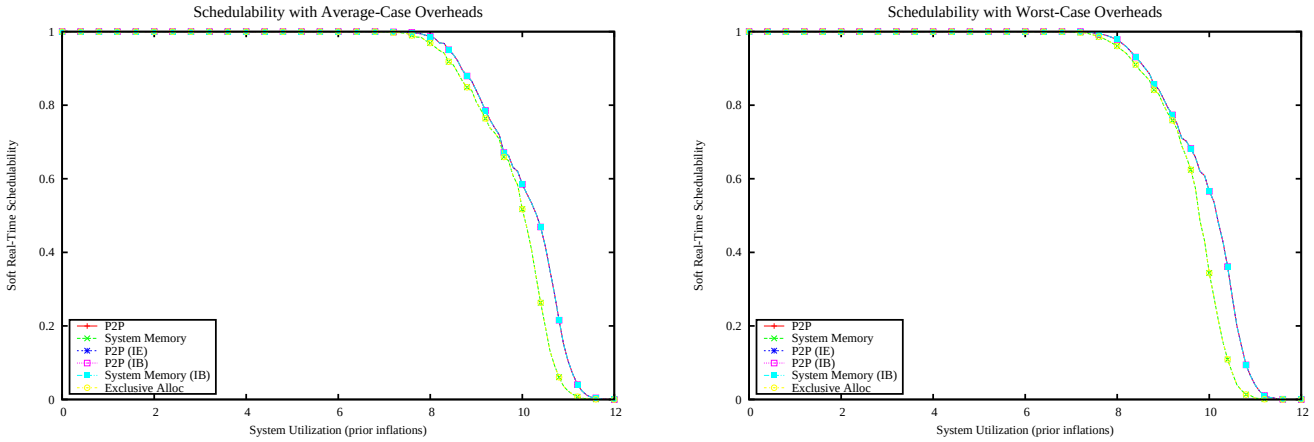

Figure 6390: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

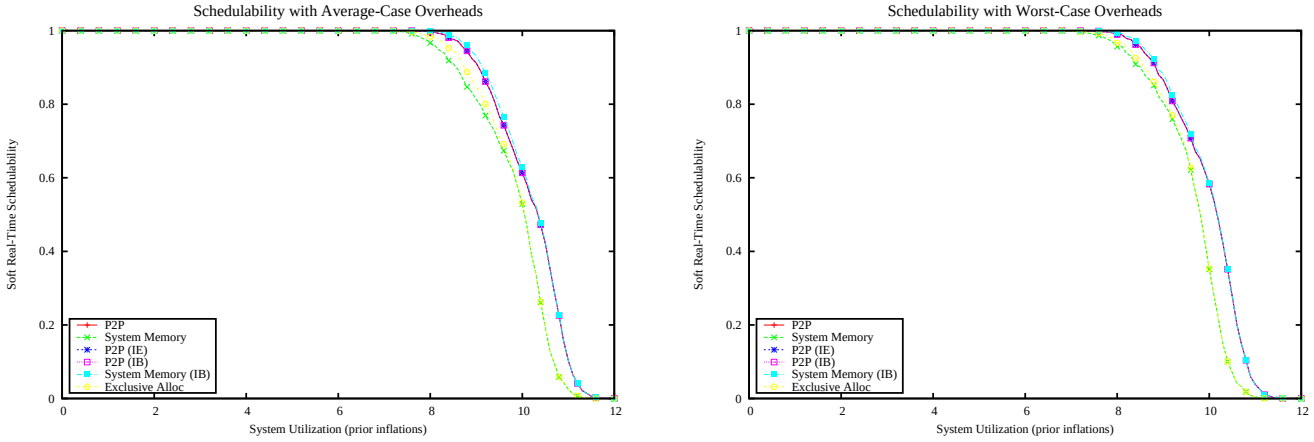

Figure 6391: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

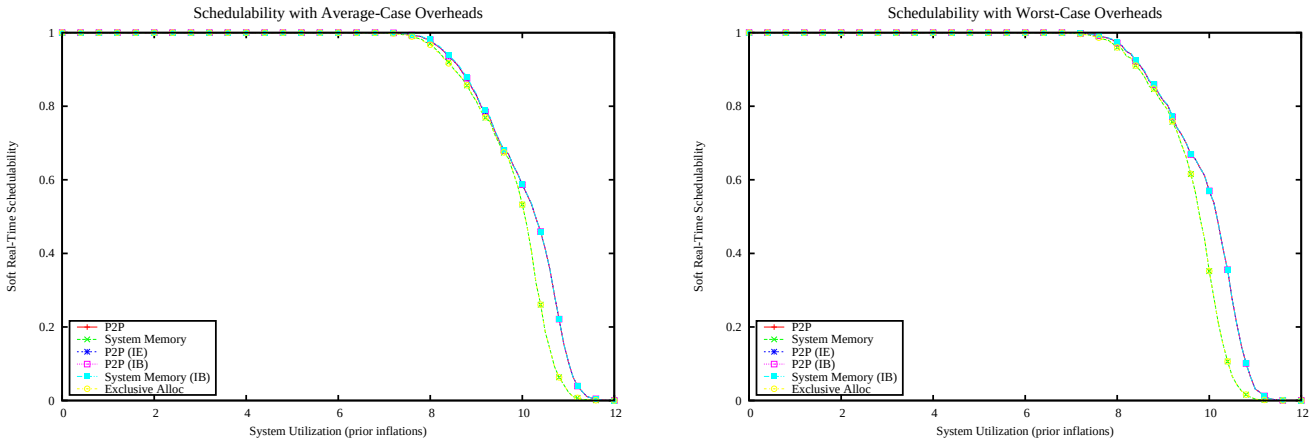

Figure 6392: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

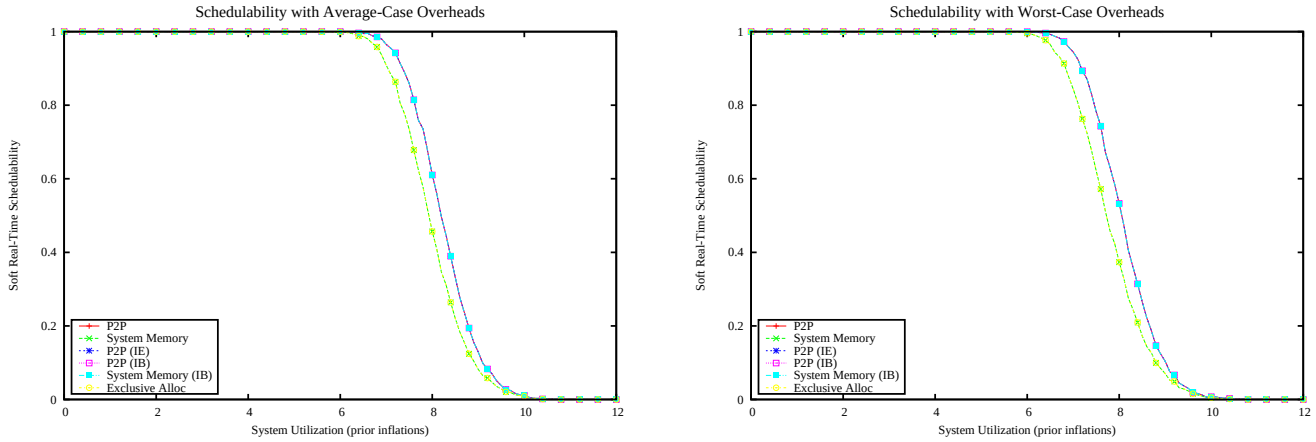

Figure 6393: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

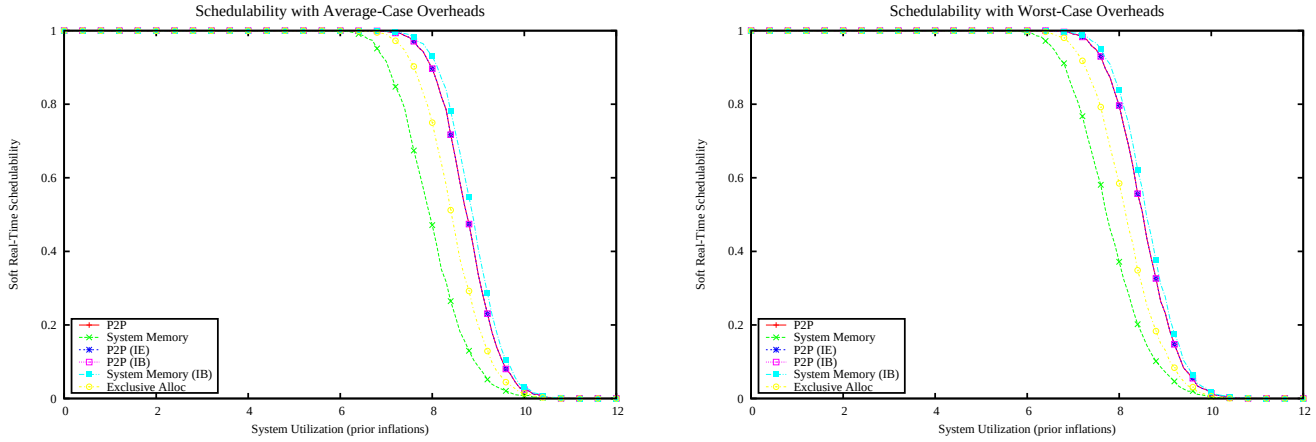

Figure 6394: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

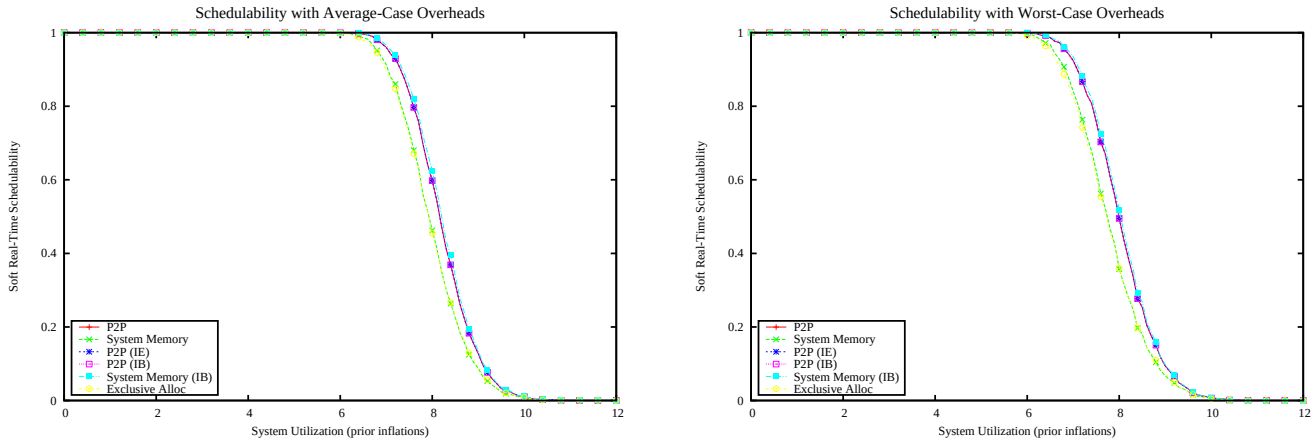

Figure 6395: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

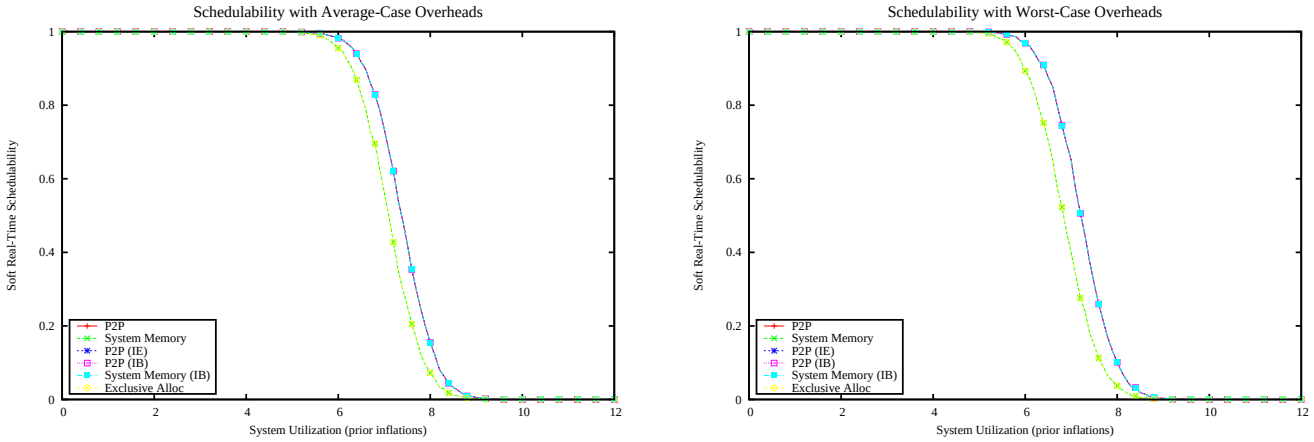

Figure 6396: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

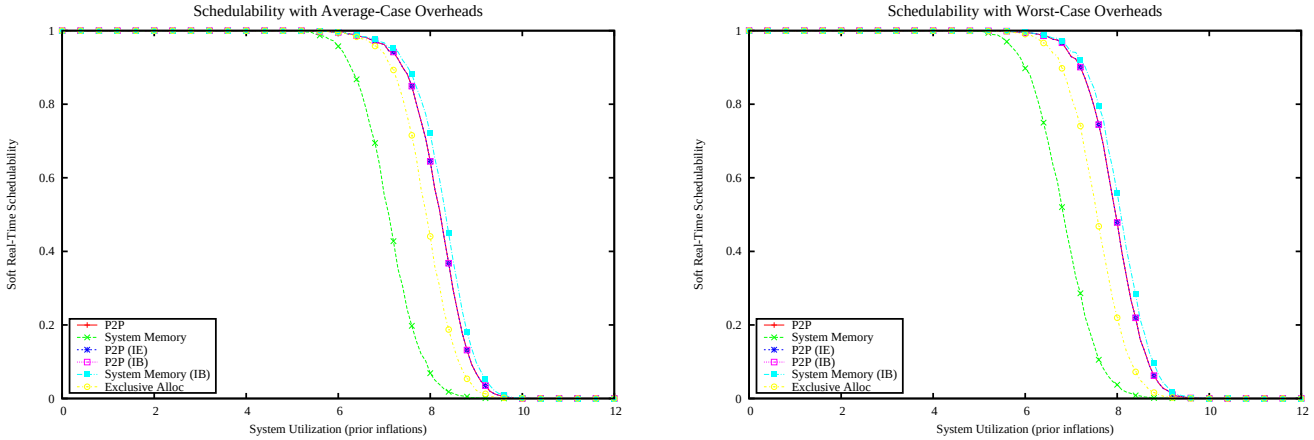

Figure 6397: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

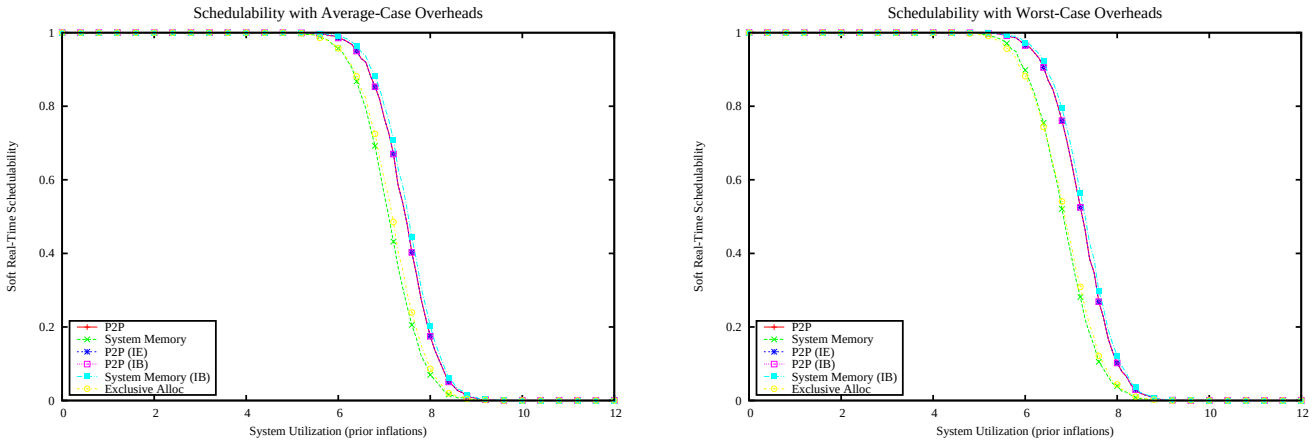

Figure 6398: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

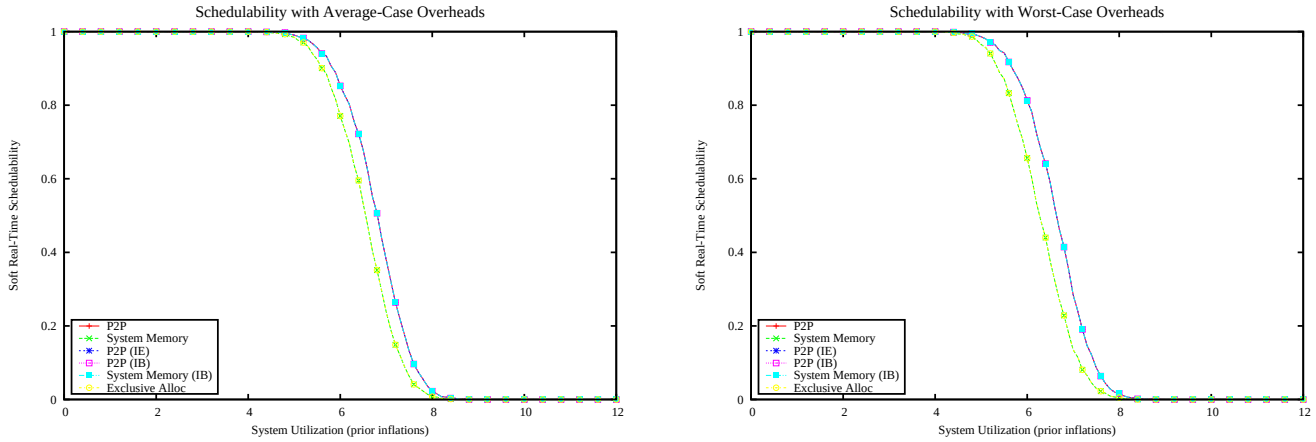

Figure 6399: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

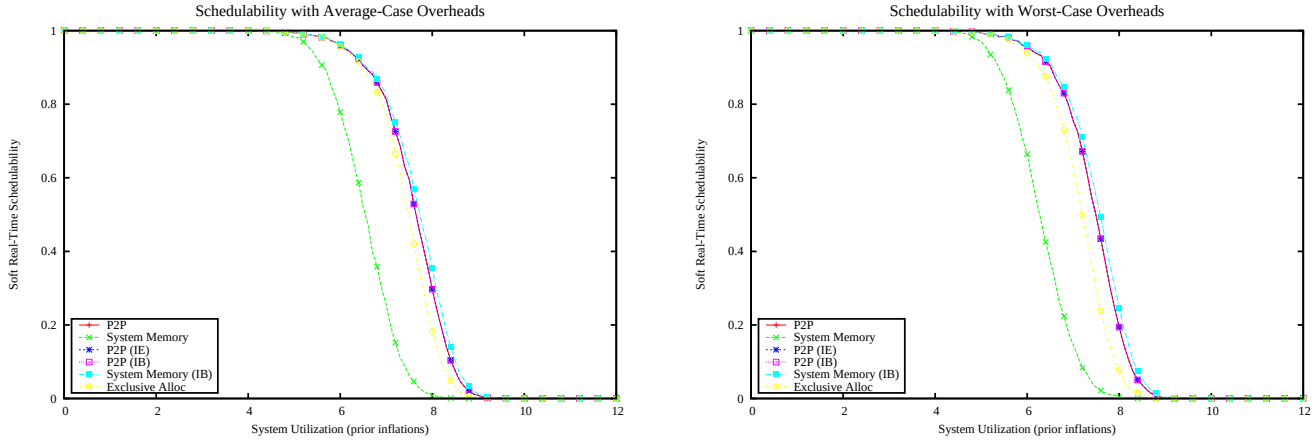

Figure 6400: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

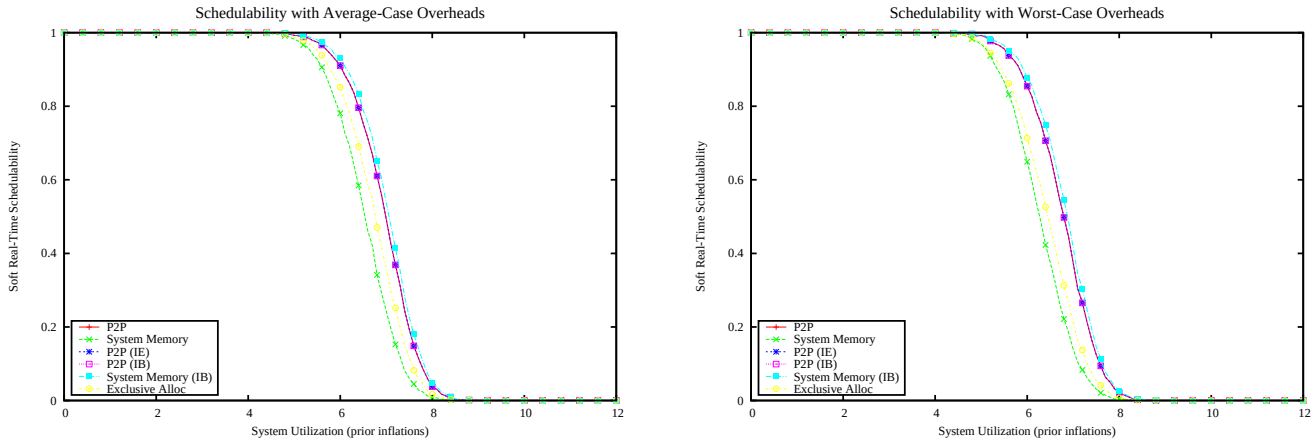

Figure 6401: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

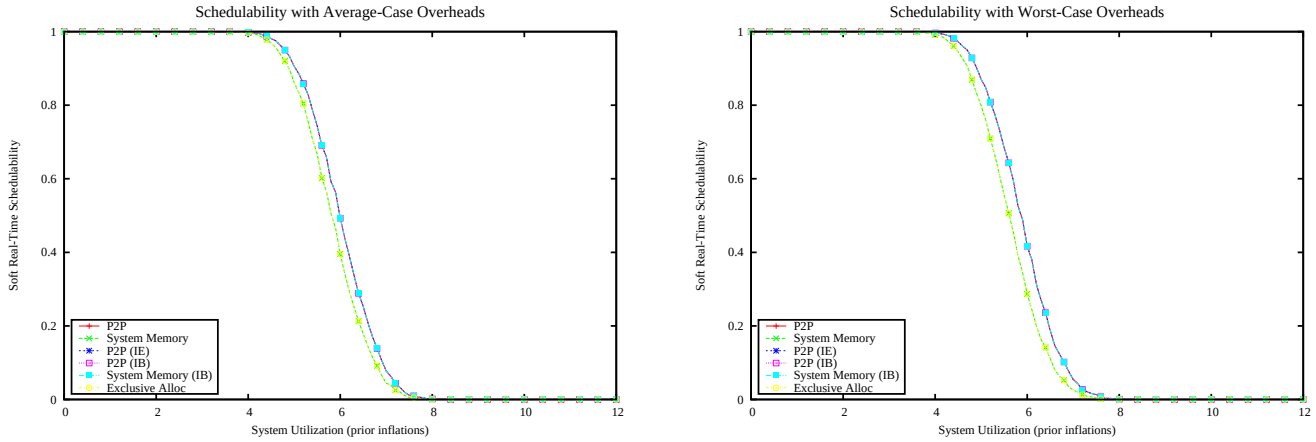

Figure 6402: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

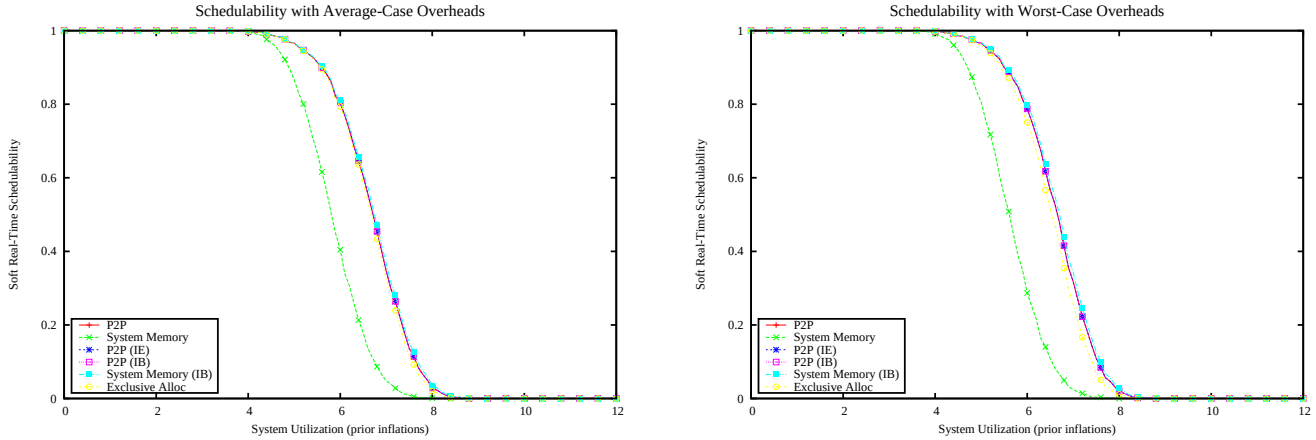

Figure 6403: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

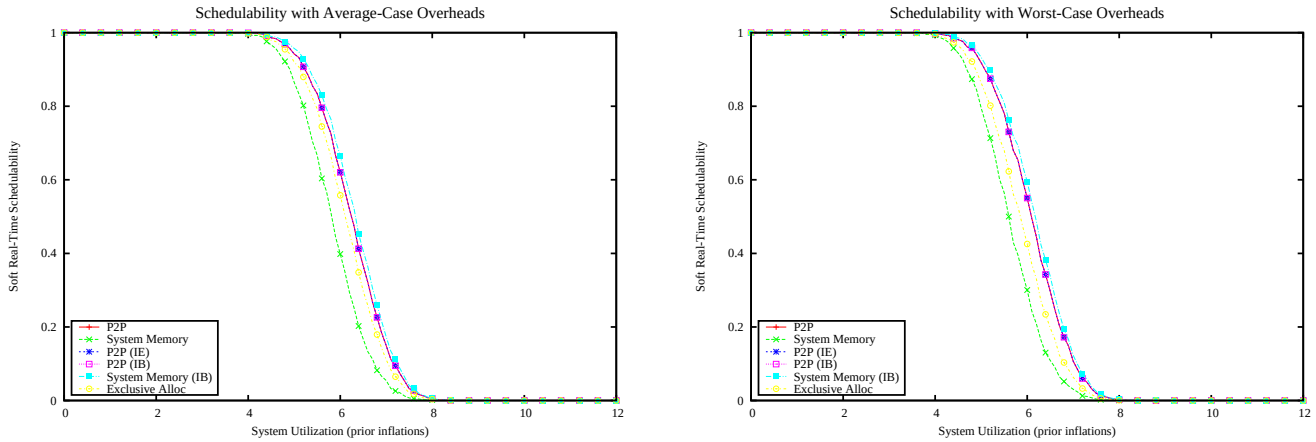

Figure 6404: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

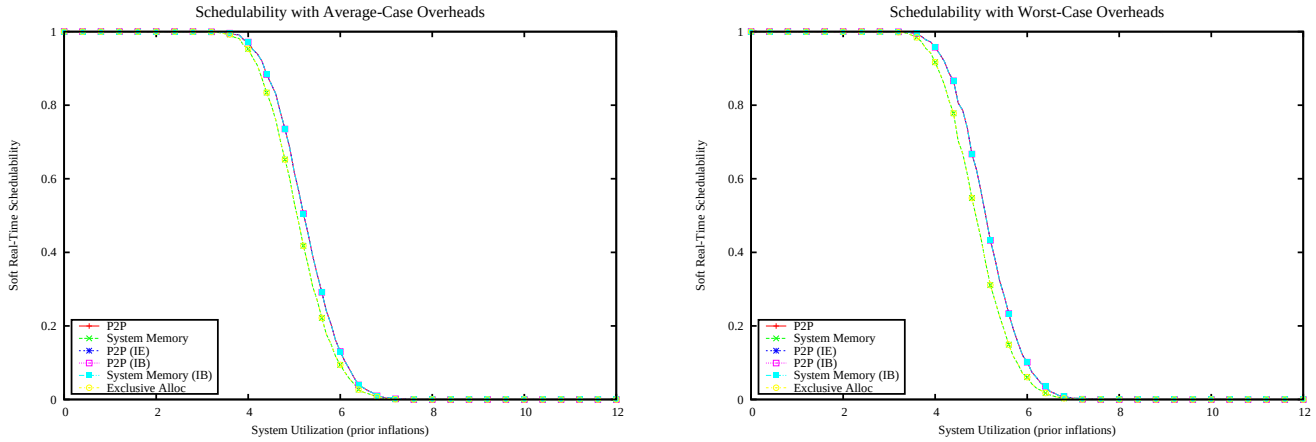

Figure 6405: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

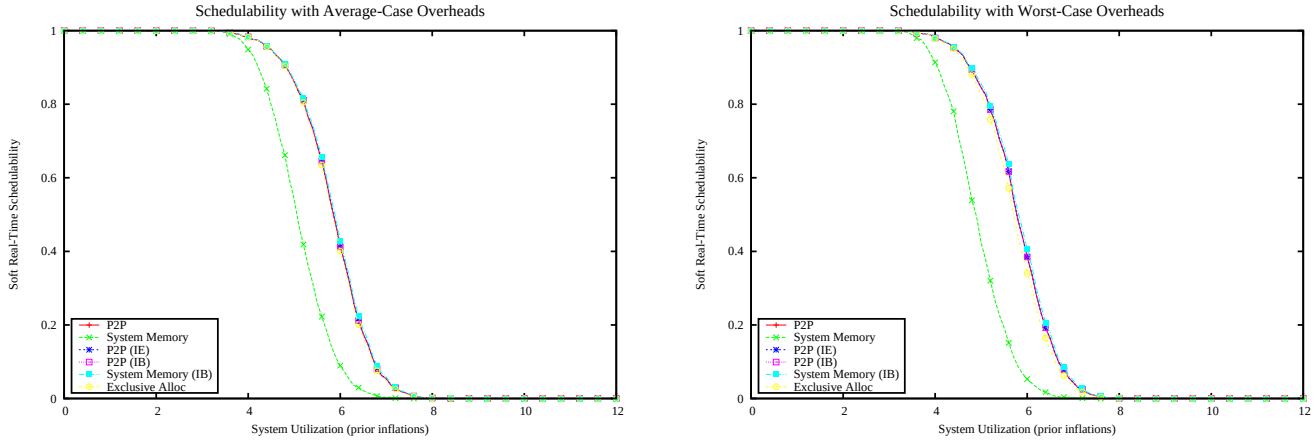

Figure 6406: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

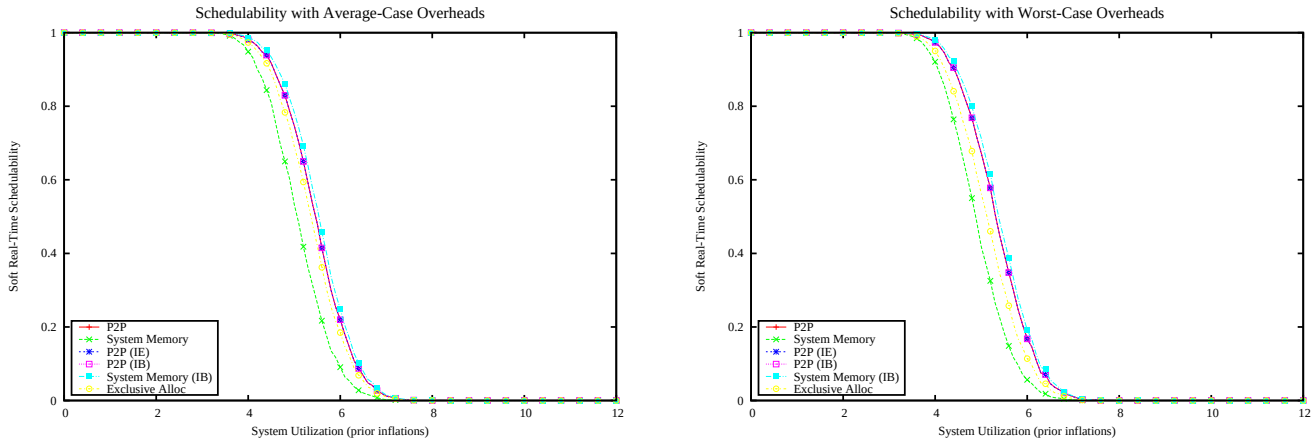

Figure 6407: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

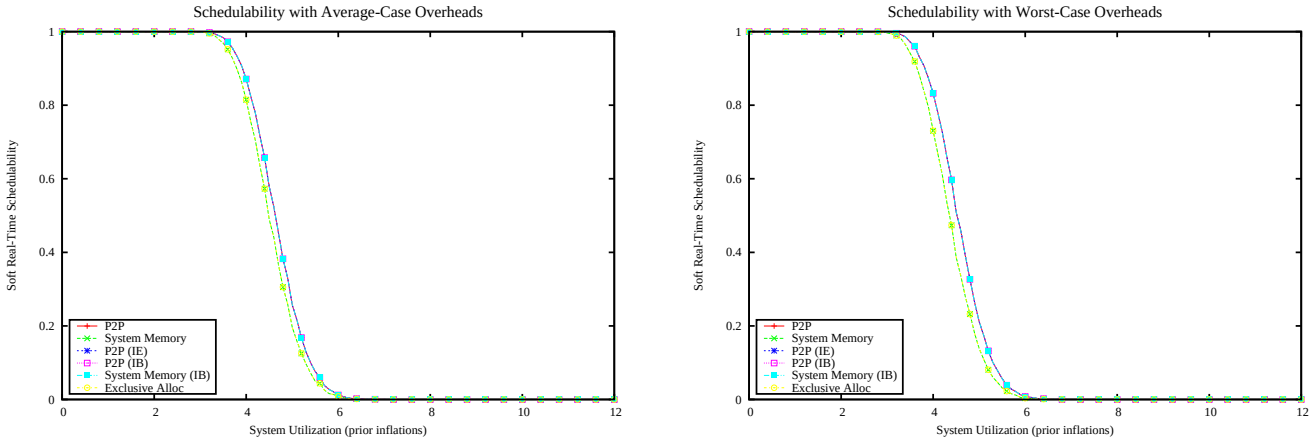

Figure 6408: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

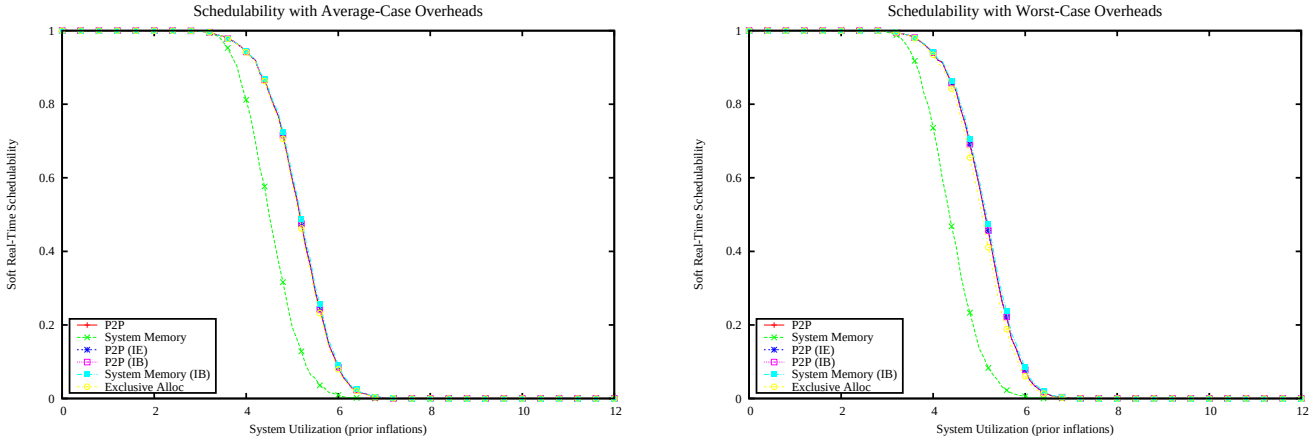

Figure 6409: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

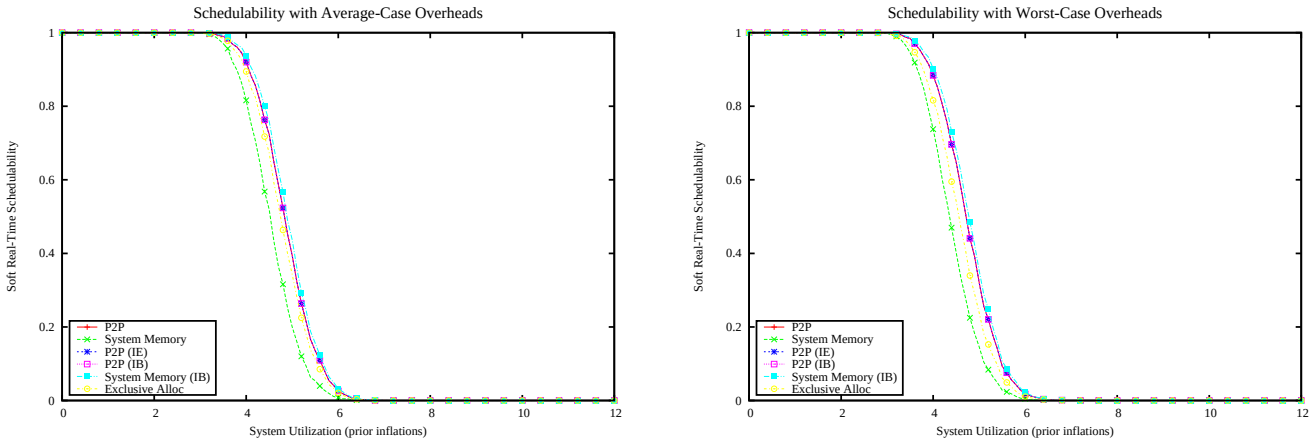

Figure 6410: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

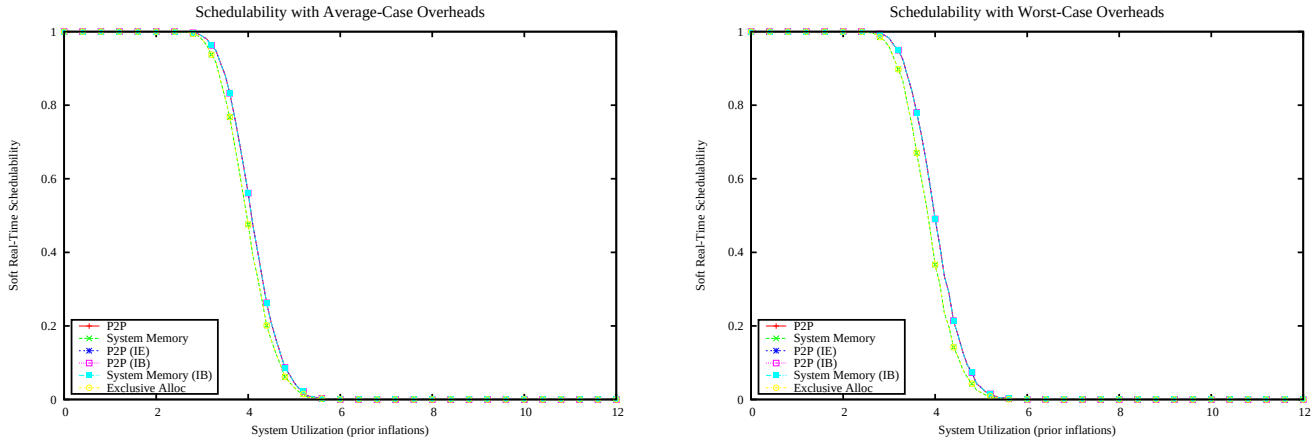

Figure 6411: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

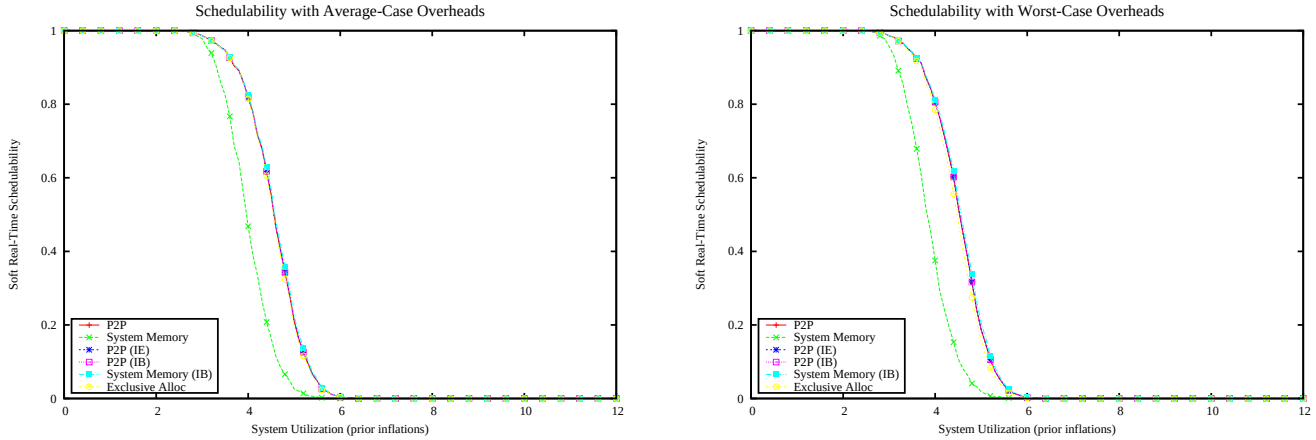

Figure 6412: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

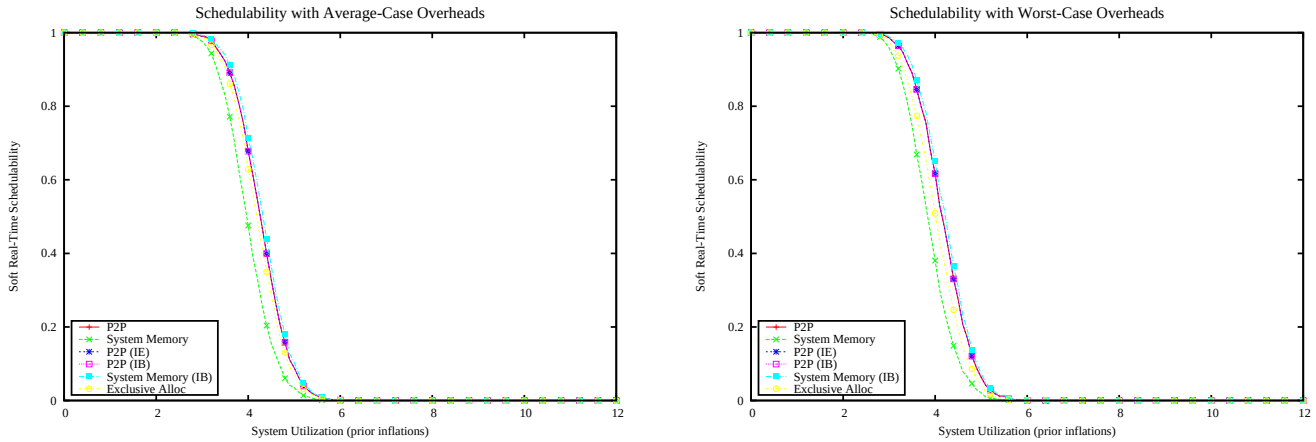

Figure 6413: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

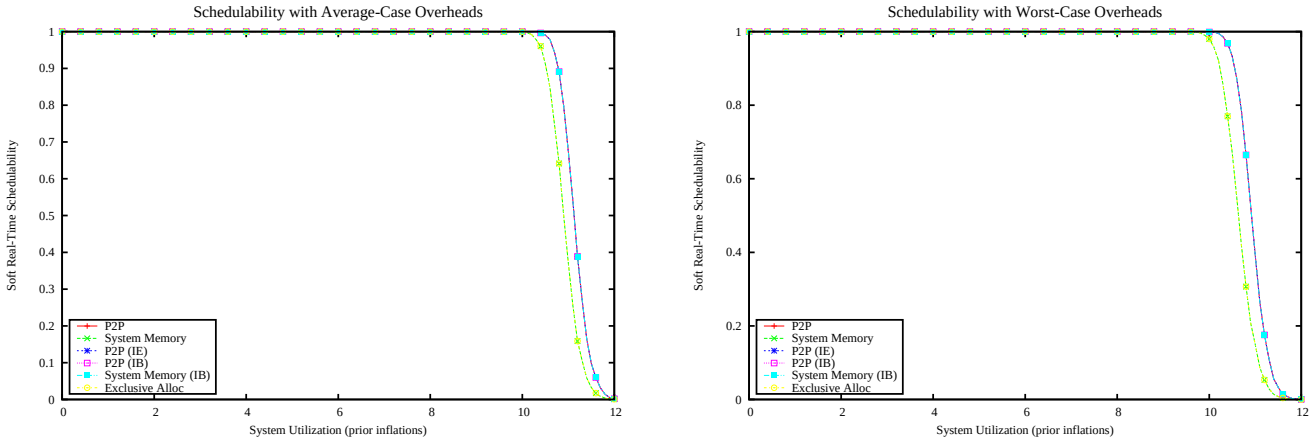

Figure 6414: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

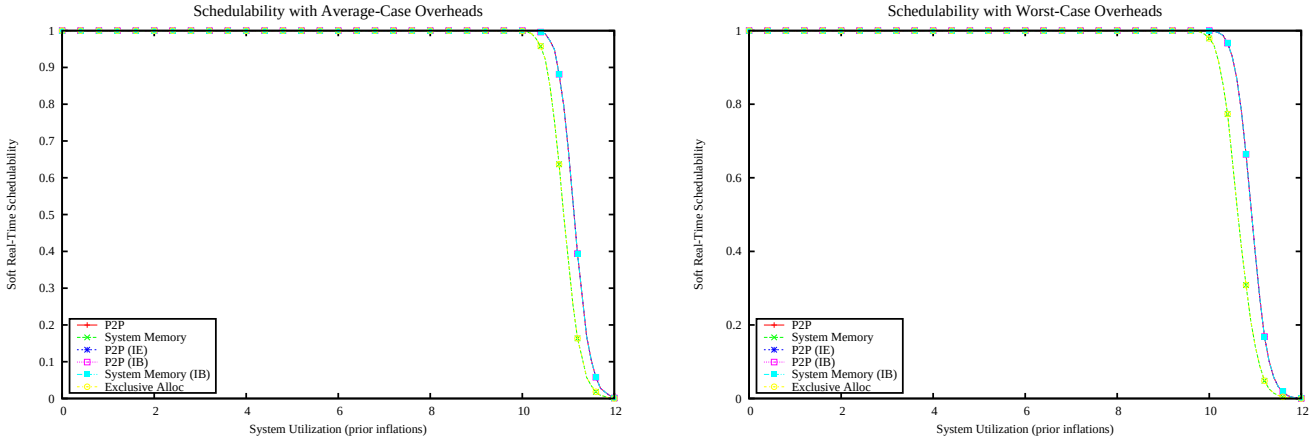

Figure 6415: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

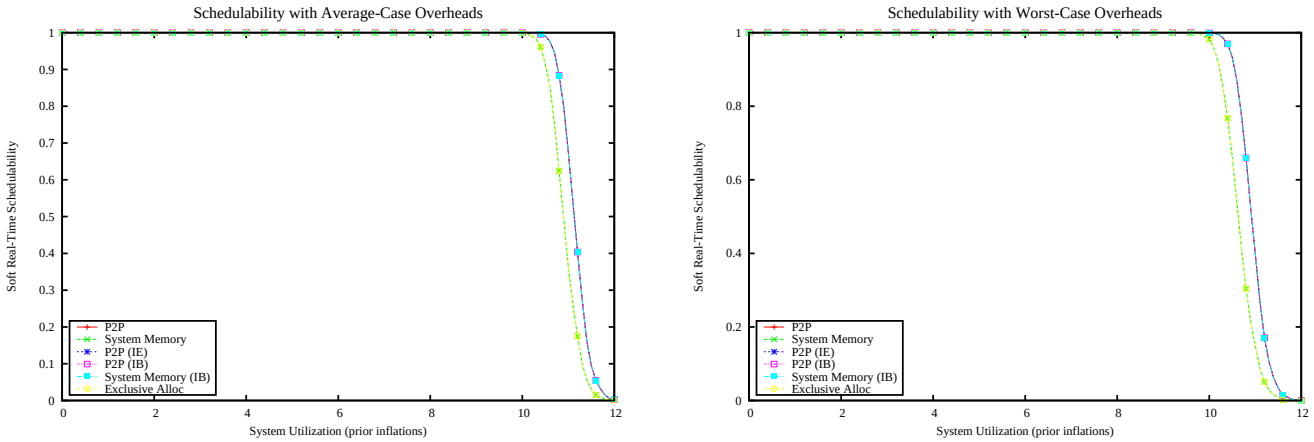

Figure 6416: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

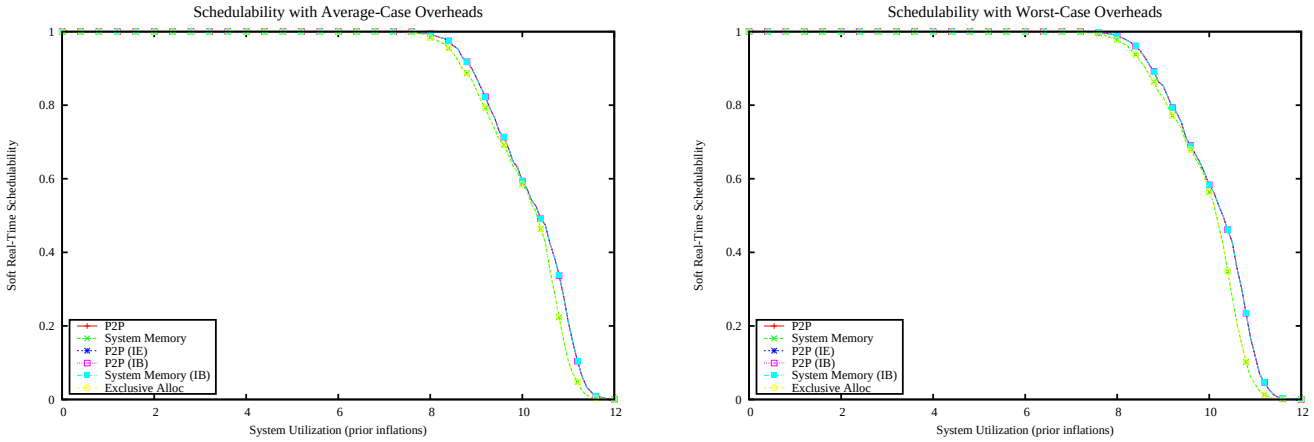

Figure 6417: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

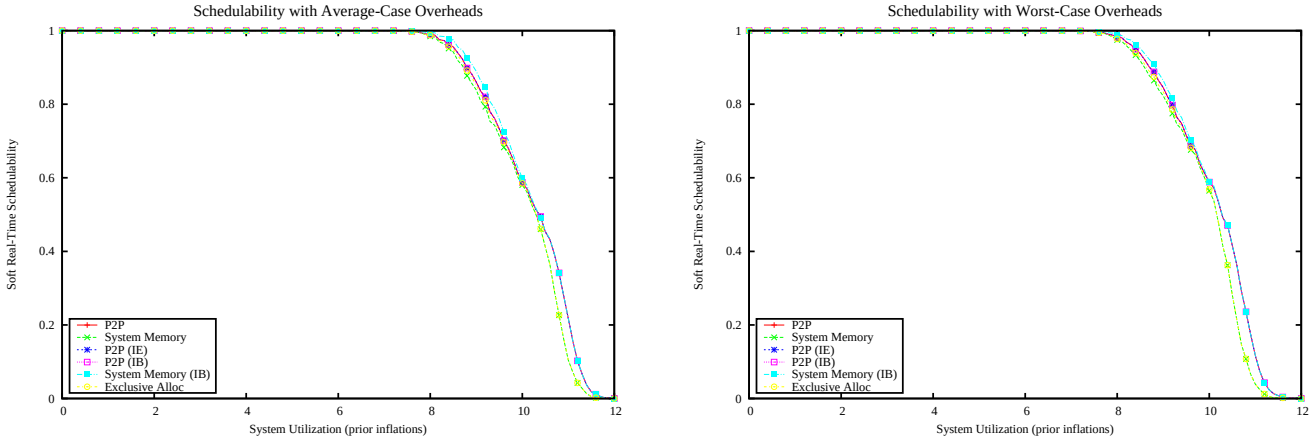

Figure 6418: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

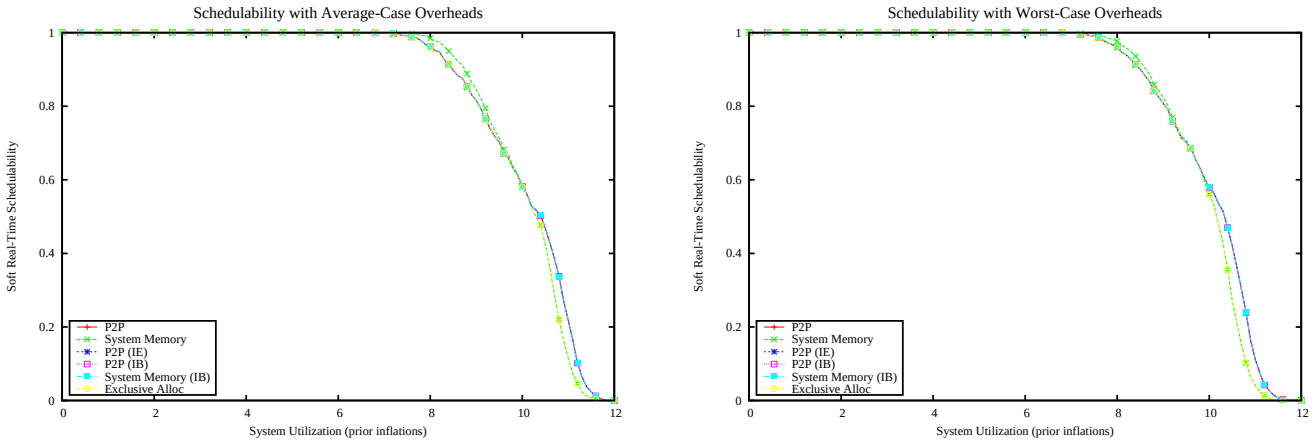

Figure 6419: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

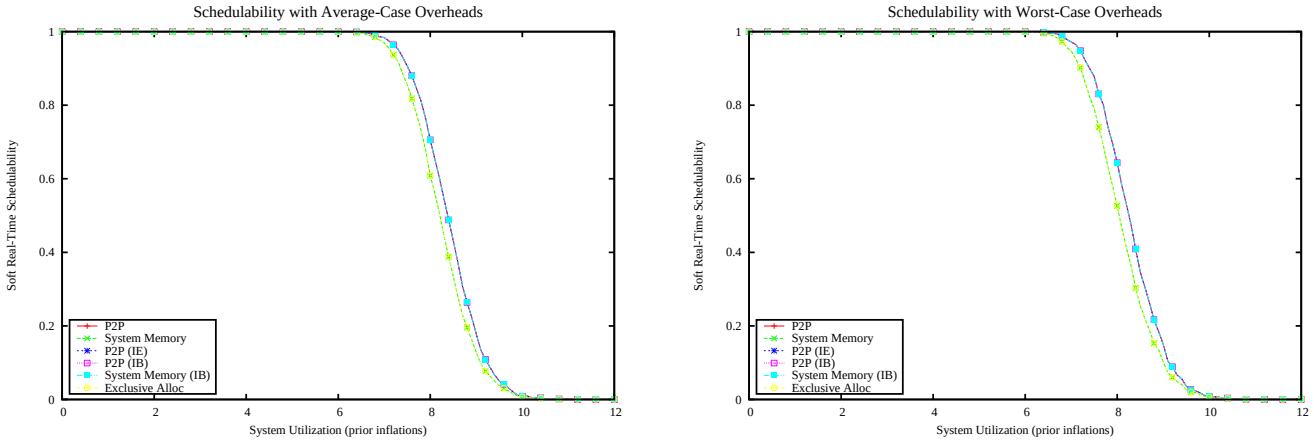

Figure 6420: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

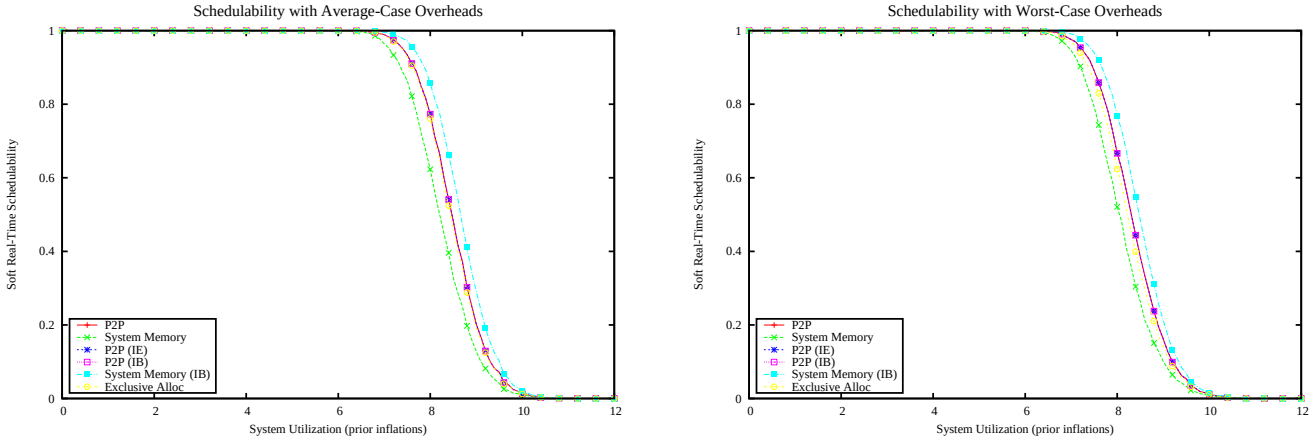

Figure 6421: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

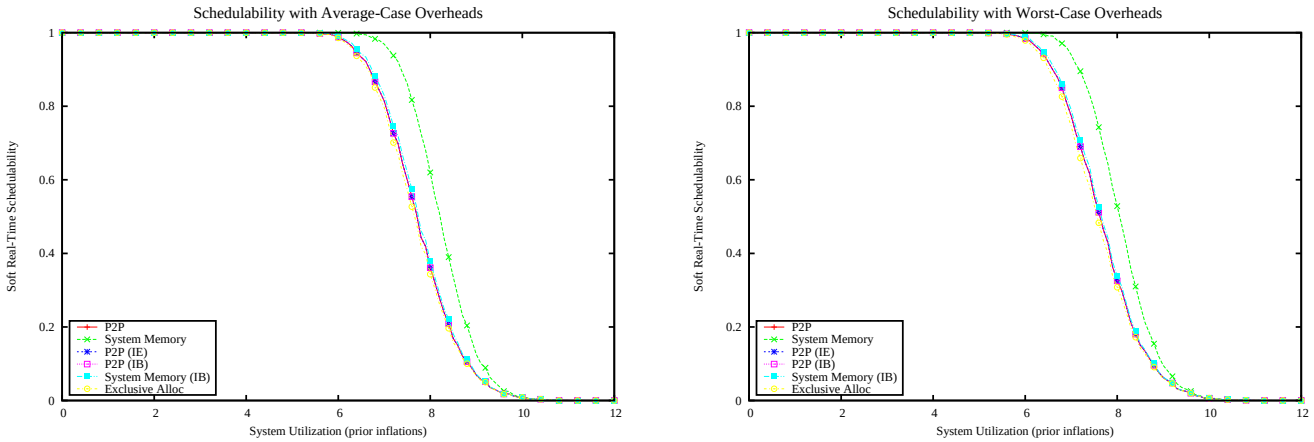

Figure 6422: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

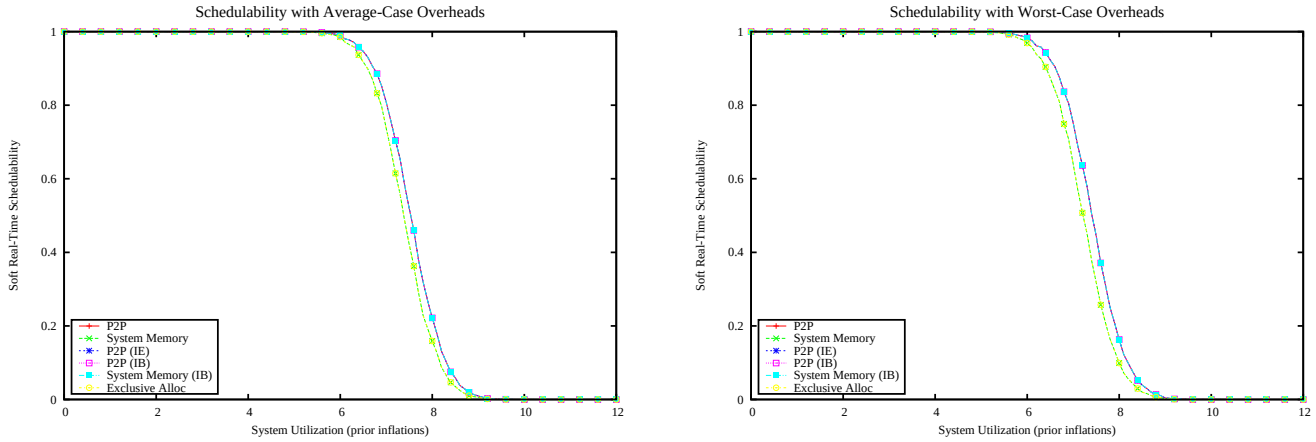

Figure 6423: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

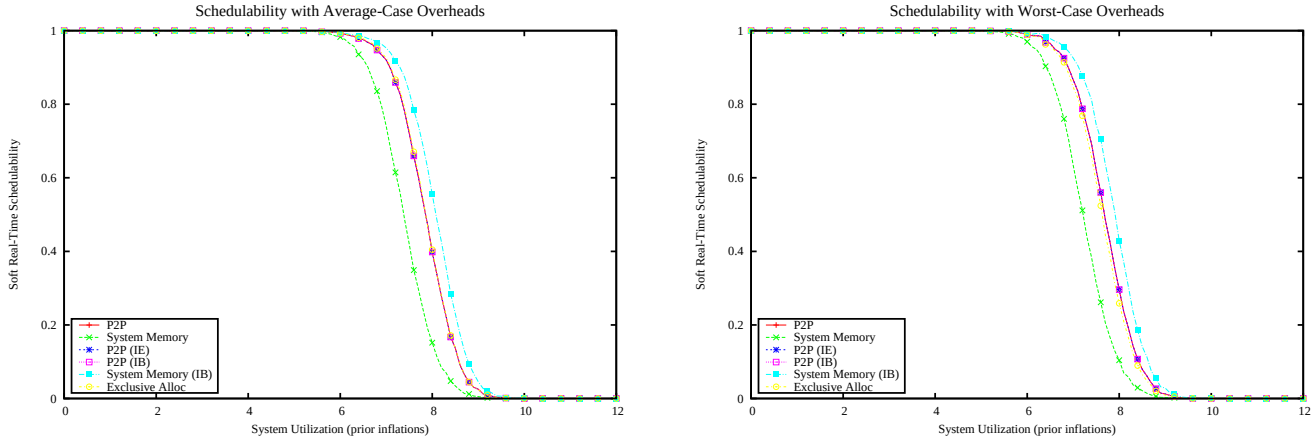

Figure 6424: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

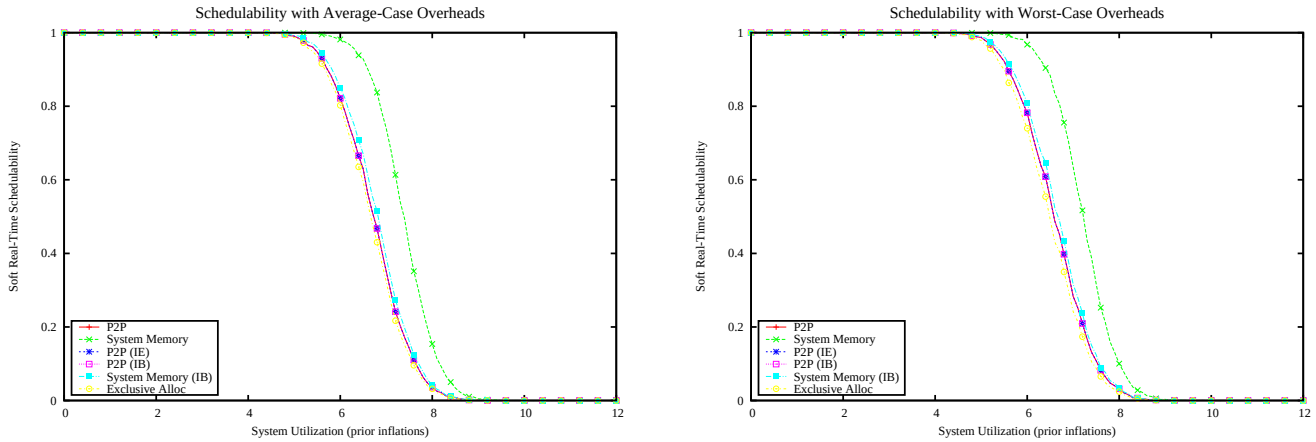

Figure 6425: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

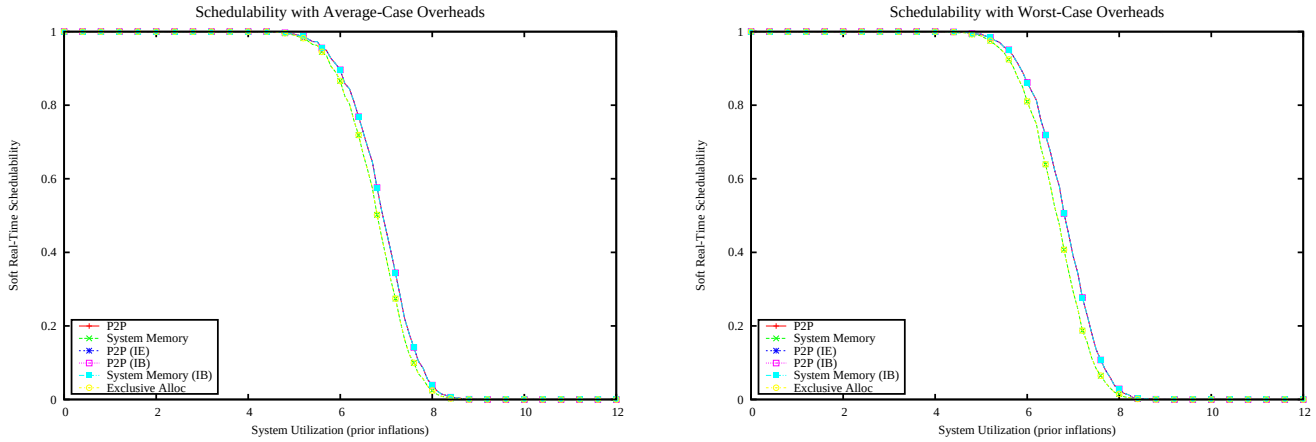

Figure 6426: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

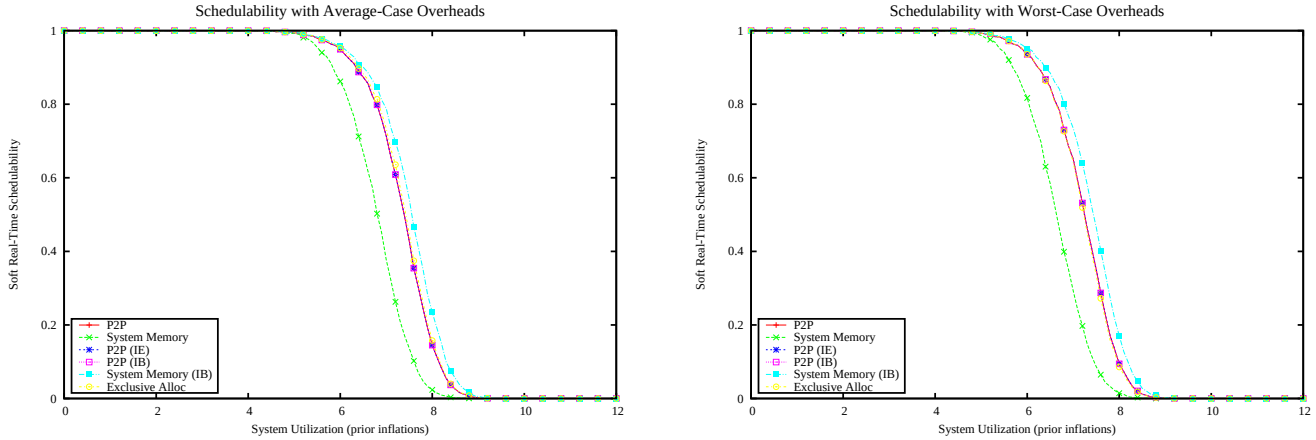

Figure 6427: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

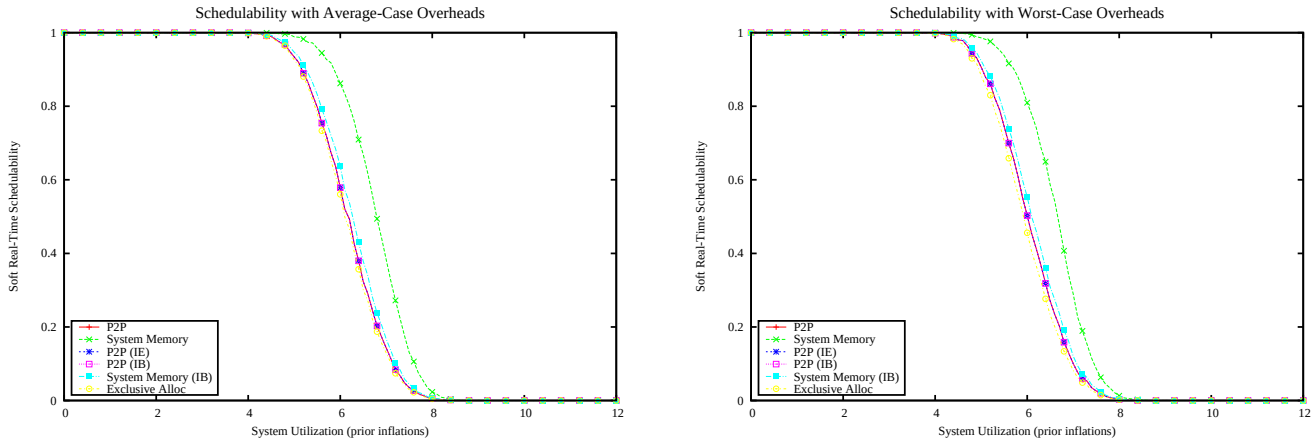

Figure 6428: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

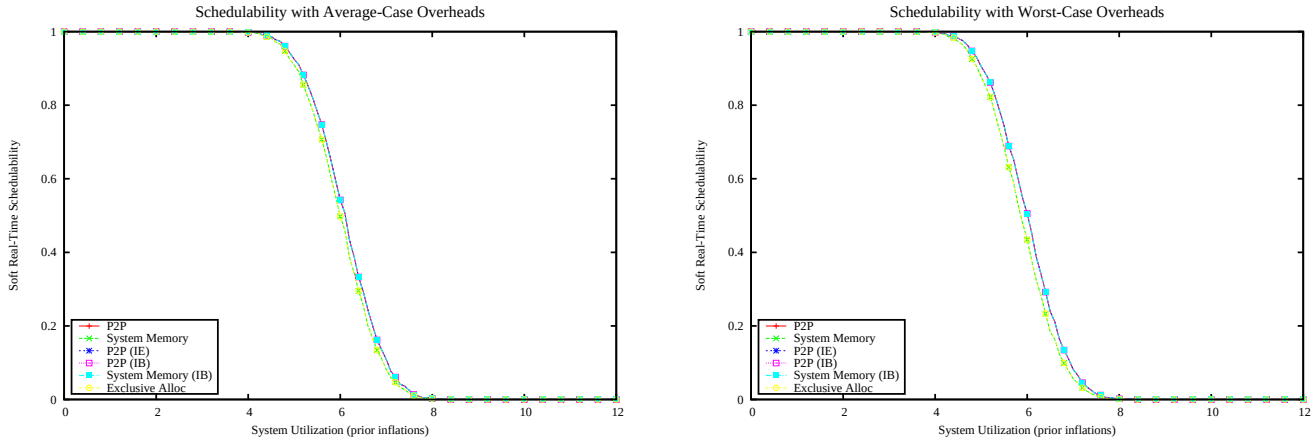

Figure 6429: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

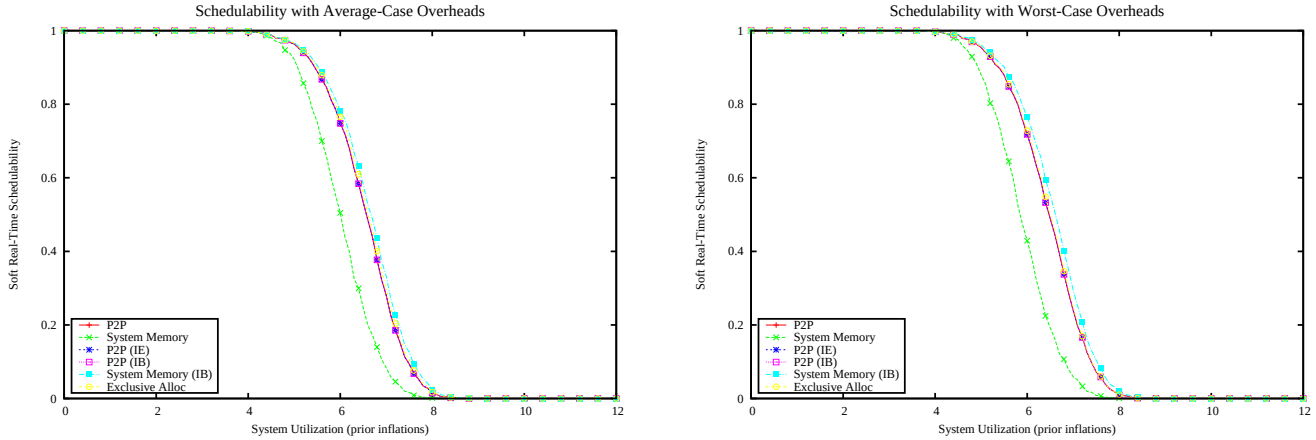

Figure 6430: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

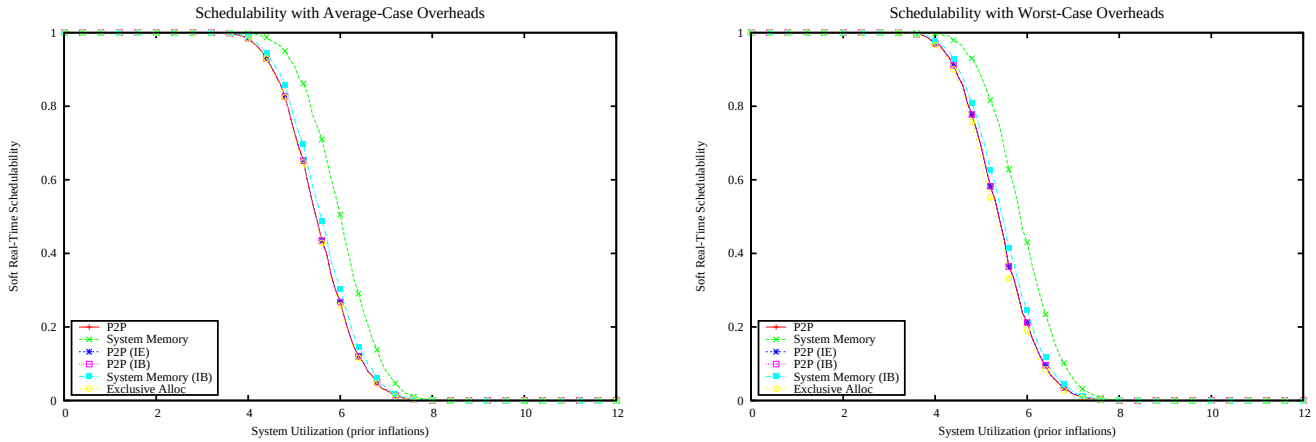

Figure 6431: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

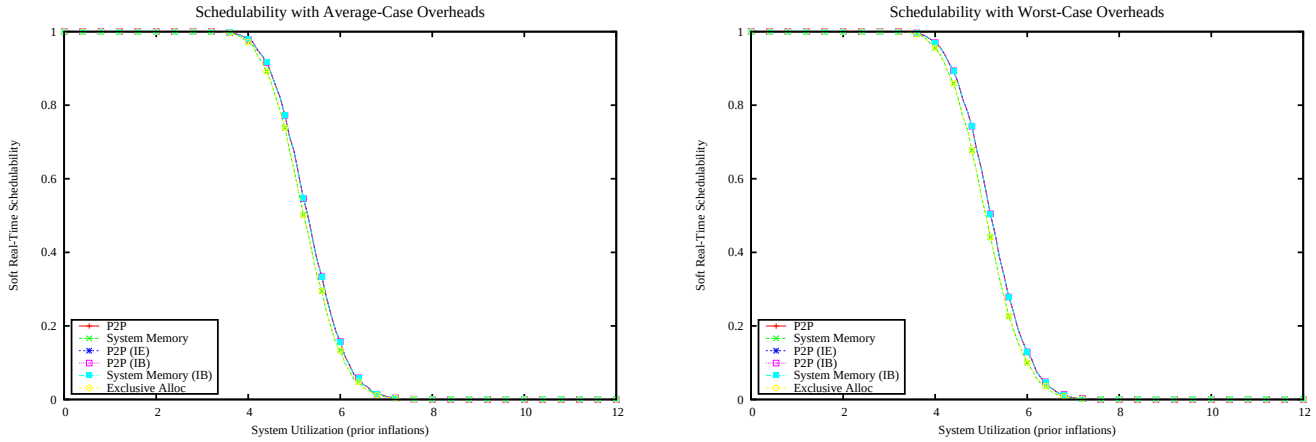

Figure 6432: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

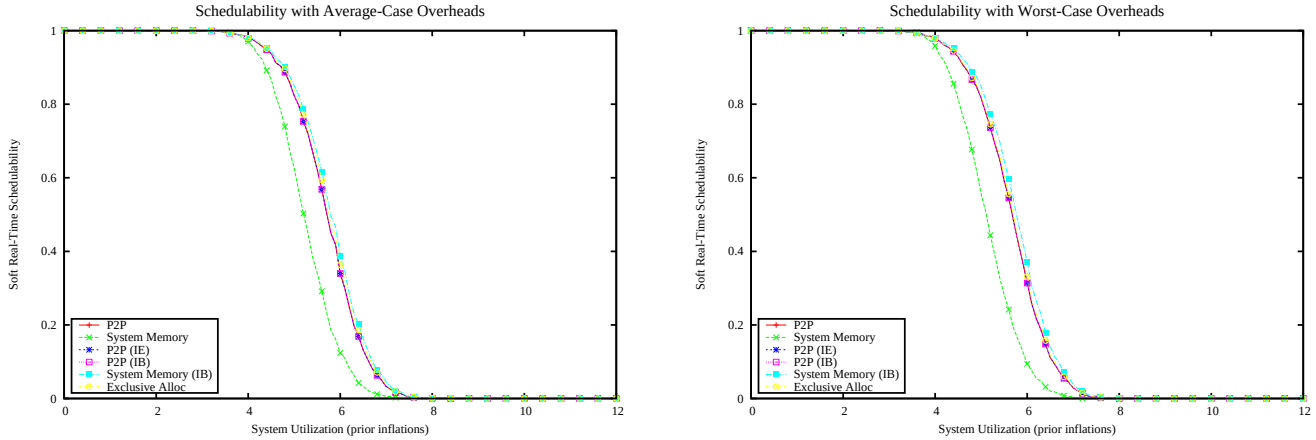

Figure 6433: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

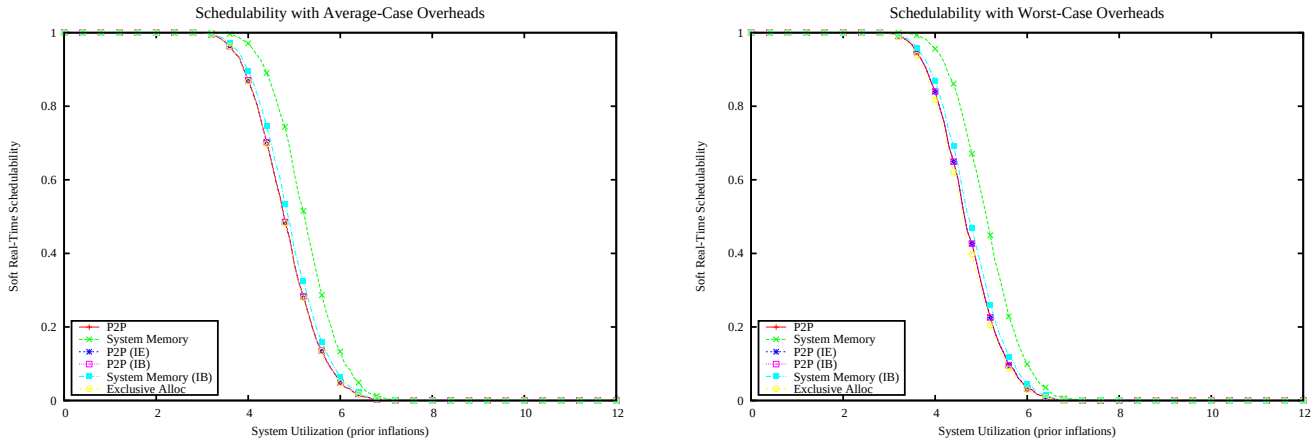

Figure 6434: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

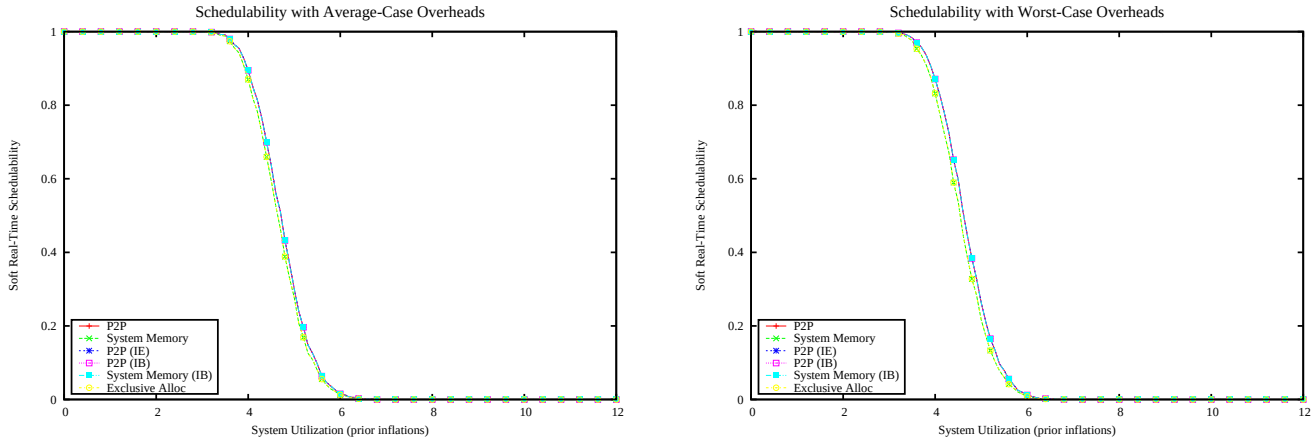

Figure 6435: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

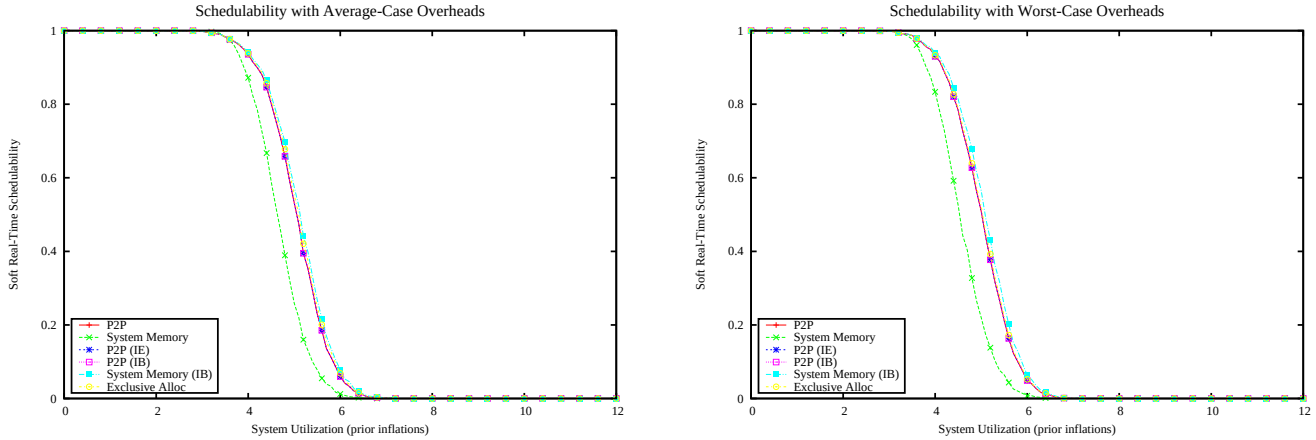

Figure 6436: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

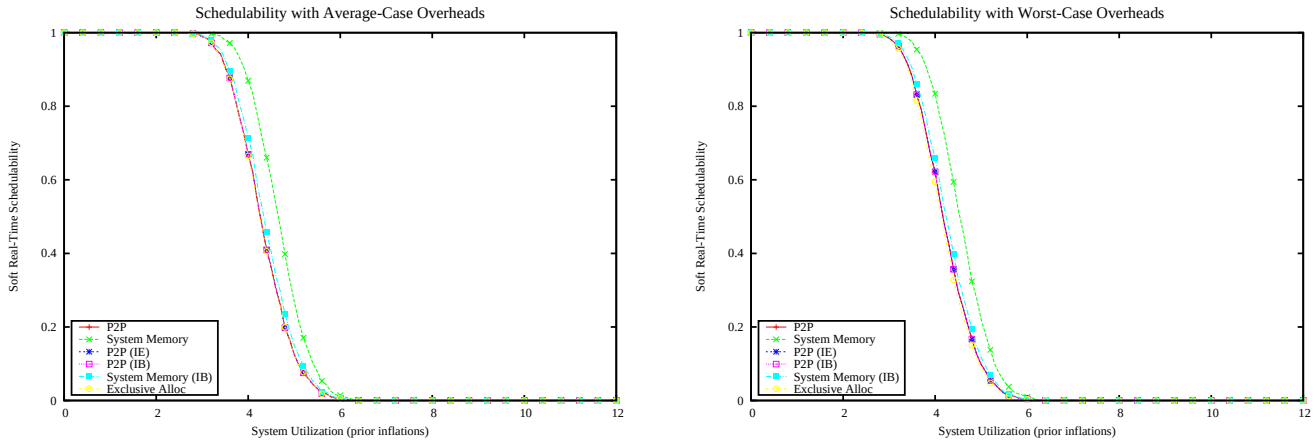

Figure 6437: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

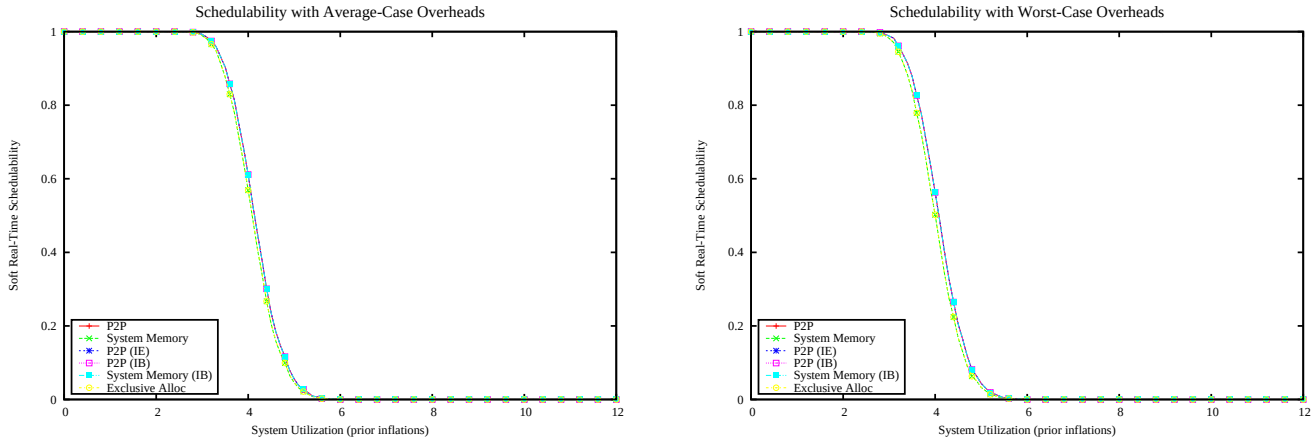

Figure 6438: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

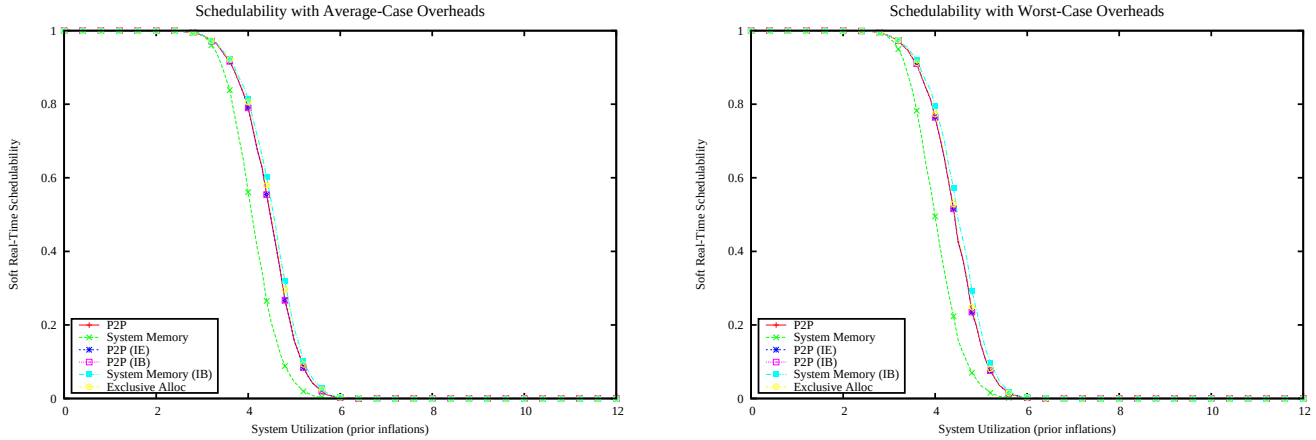

Figure 6439: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

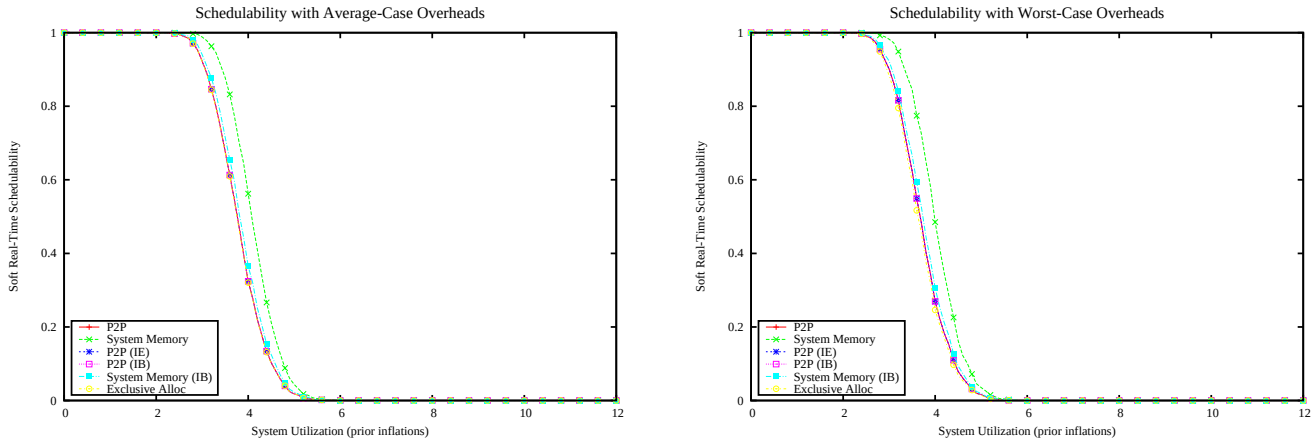

Figure 6440: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

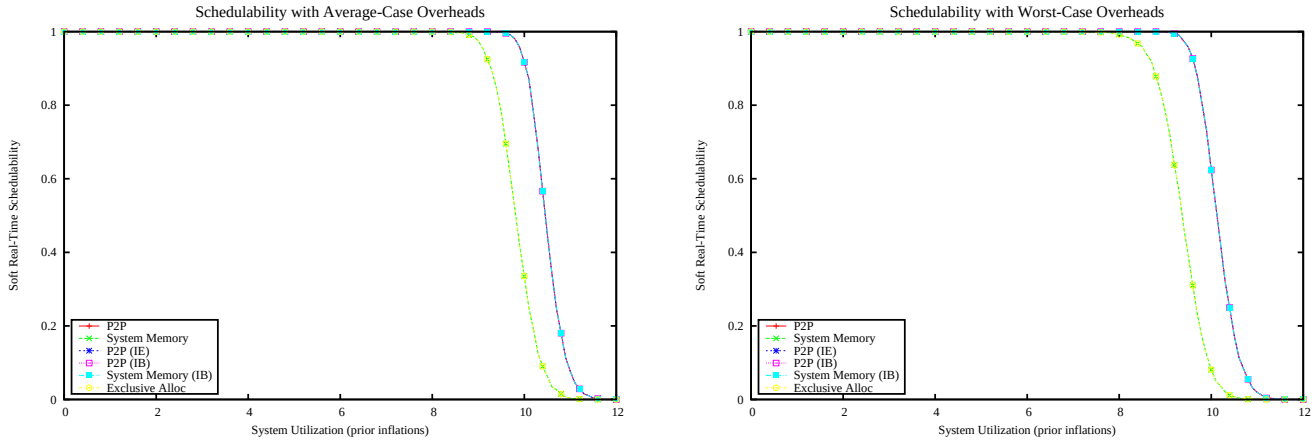

Figure 6441: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

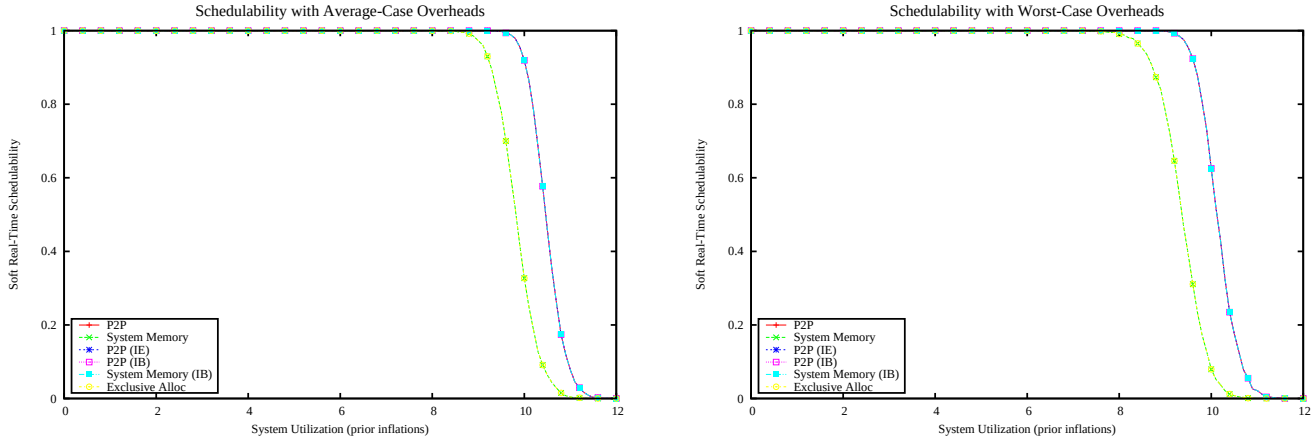

Figure 6442: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

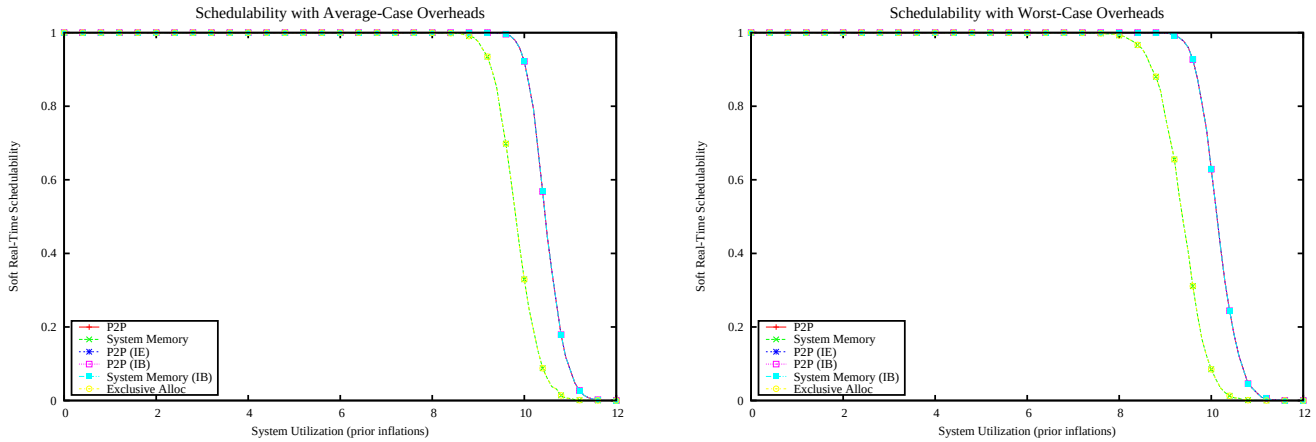

Figure 6443: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

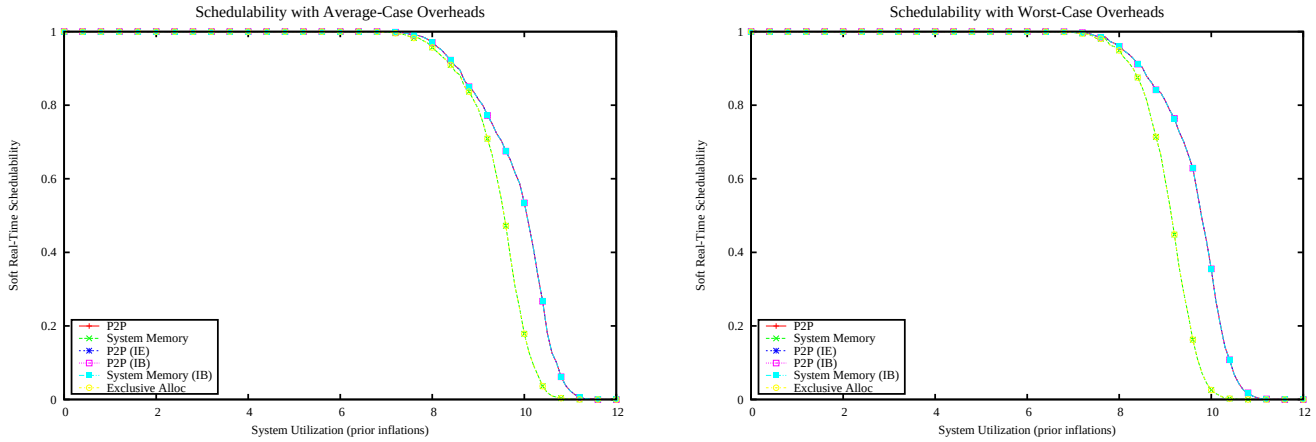

Figure 6444: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

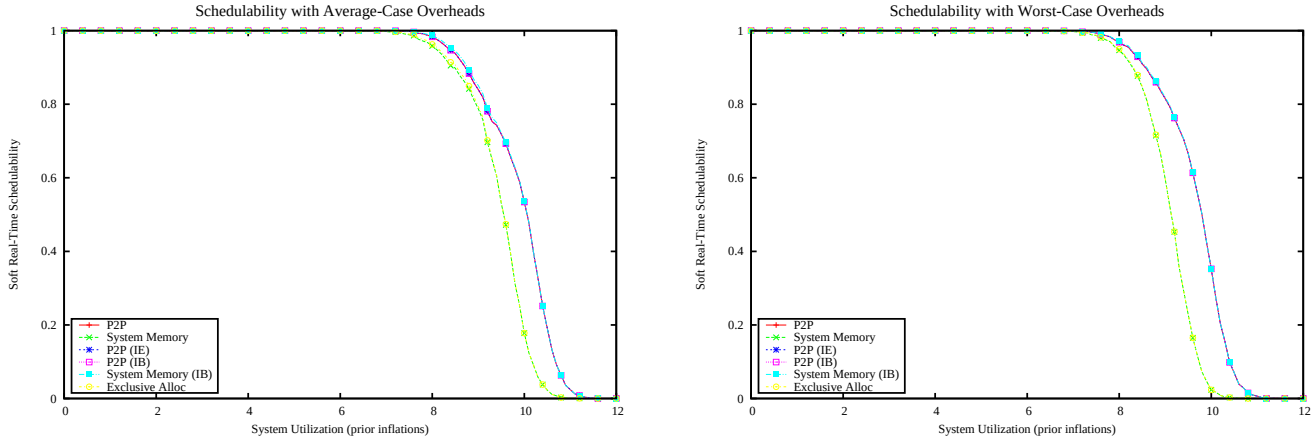

Figure 6445: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

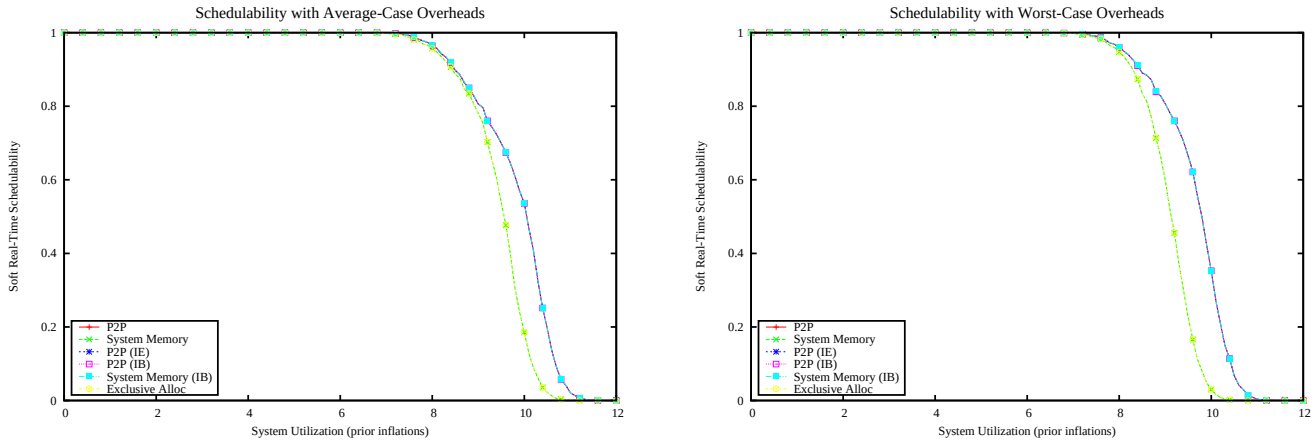

Figure 6446: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

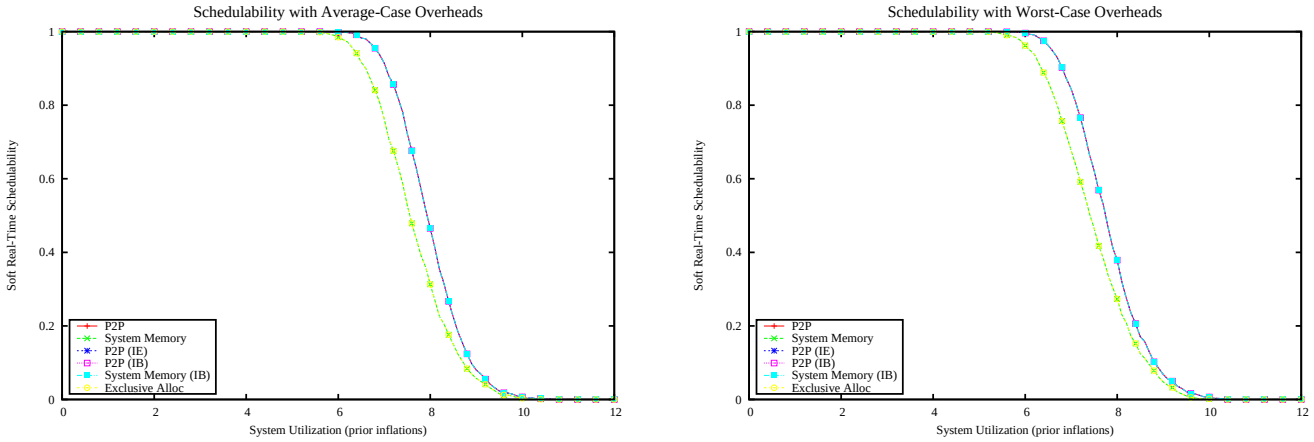

Figure 6447: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

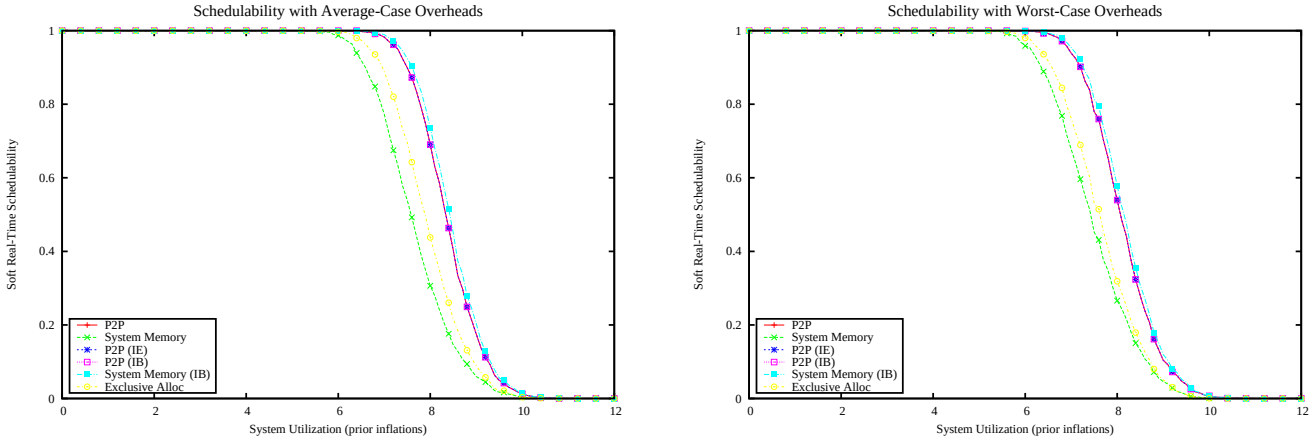

Figure 6448: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

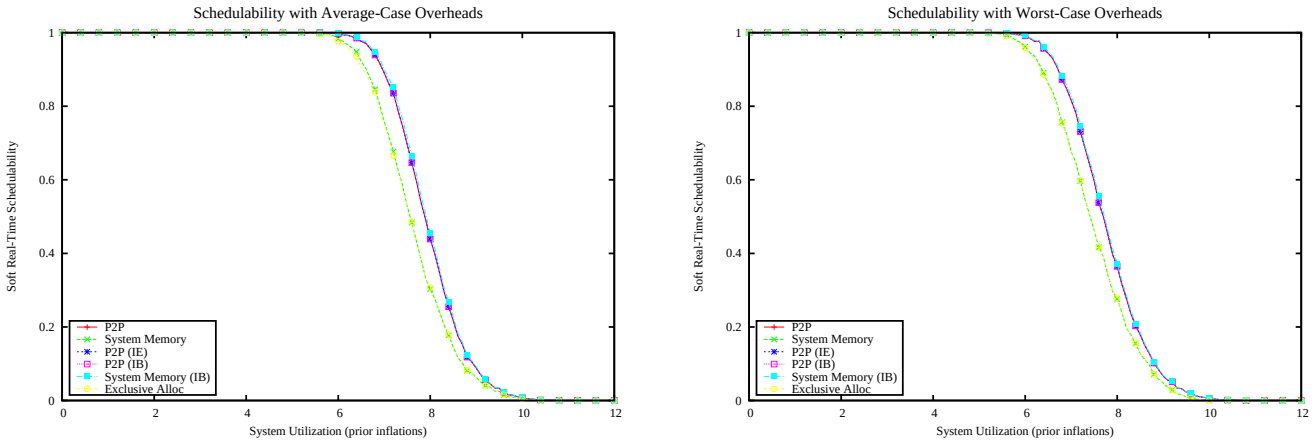

Figure 6449: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

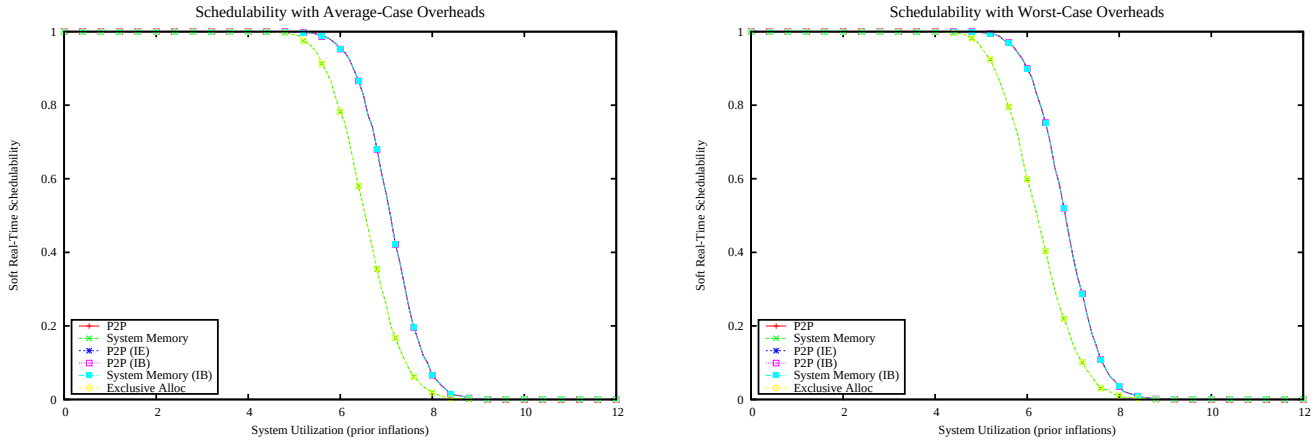

Figure 6450: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

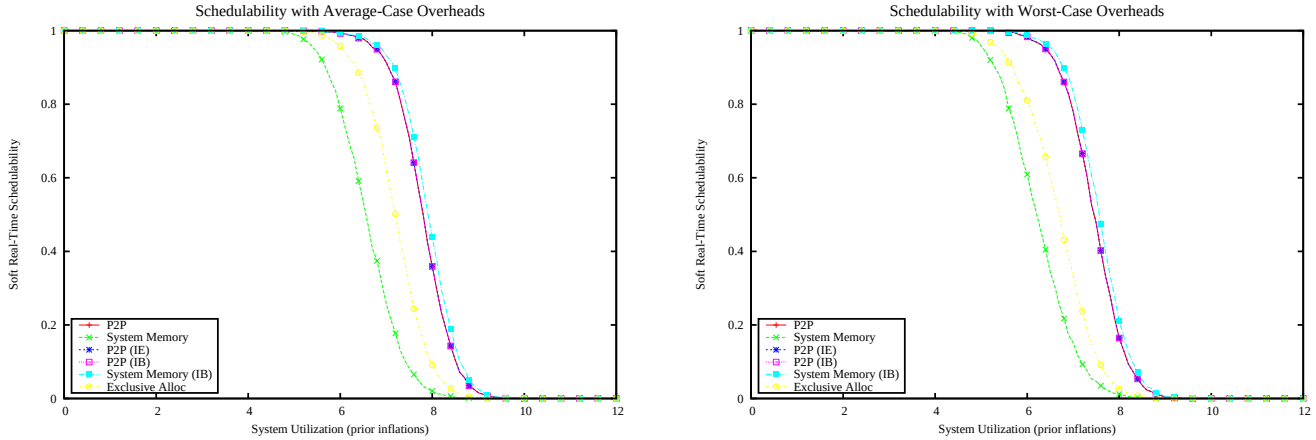

Figure 6451: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

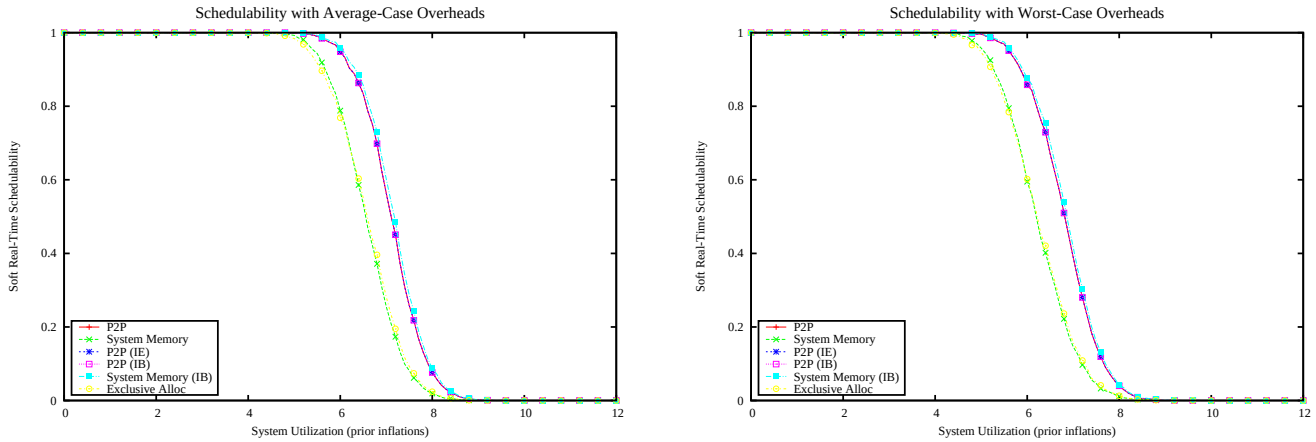

Figure 6452: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

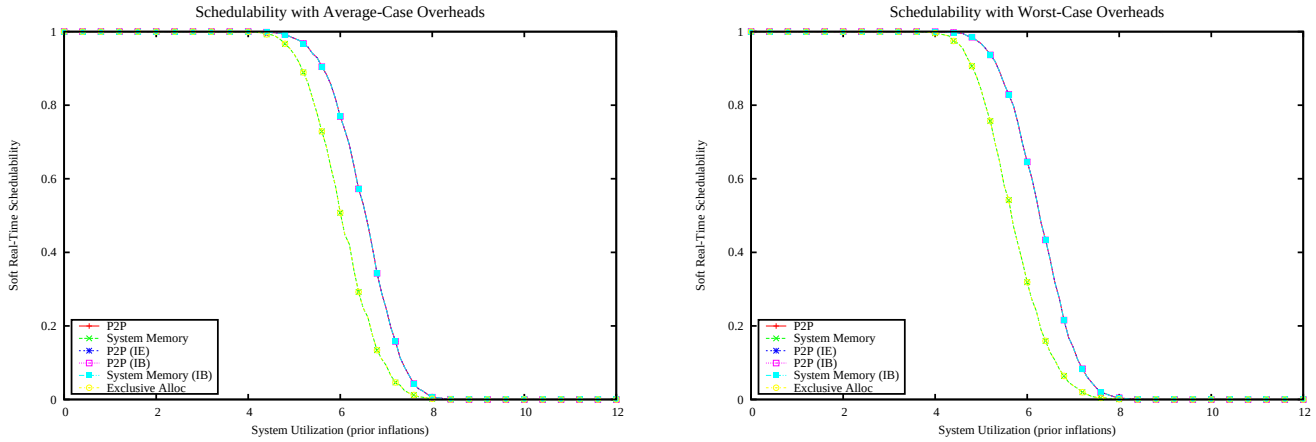

Figure 6453: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

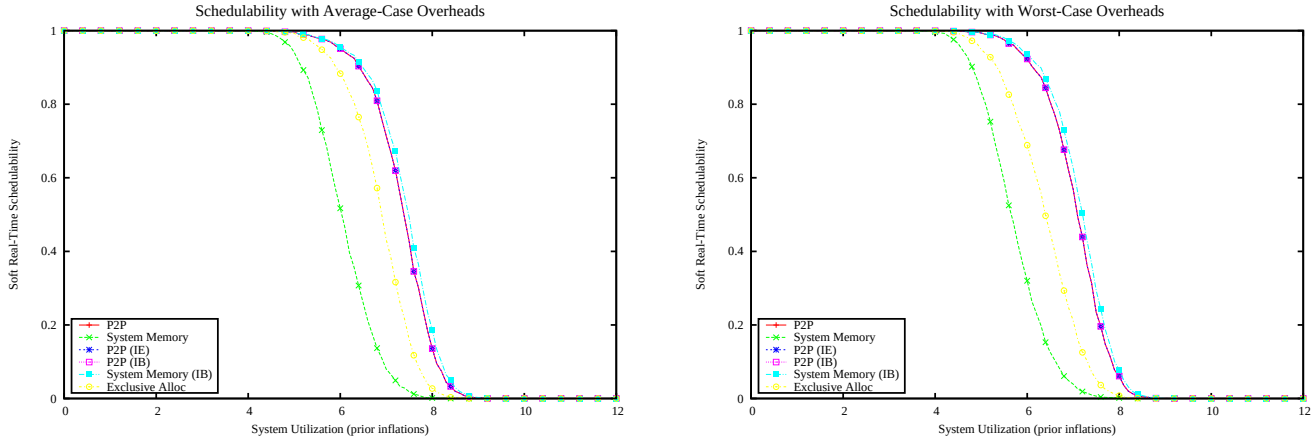

Figure 6454: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

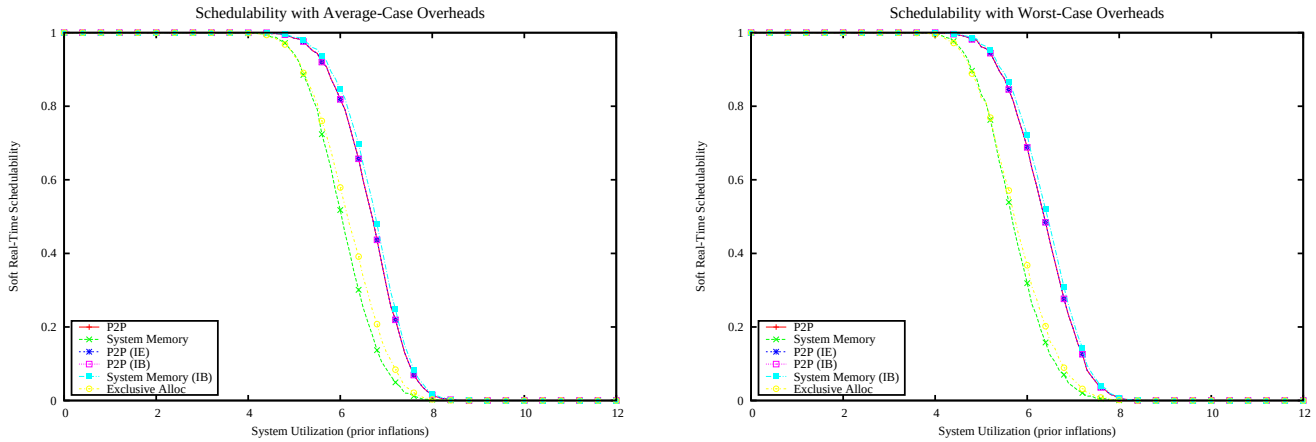

Figure 6455: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

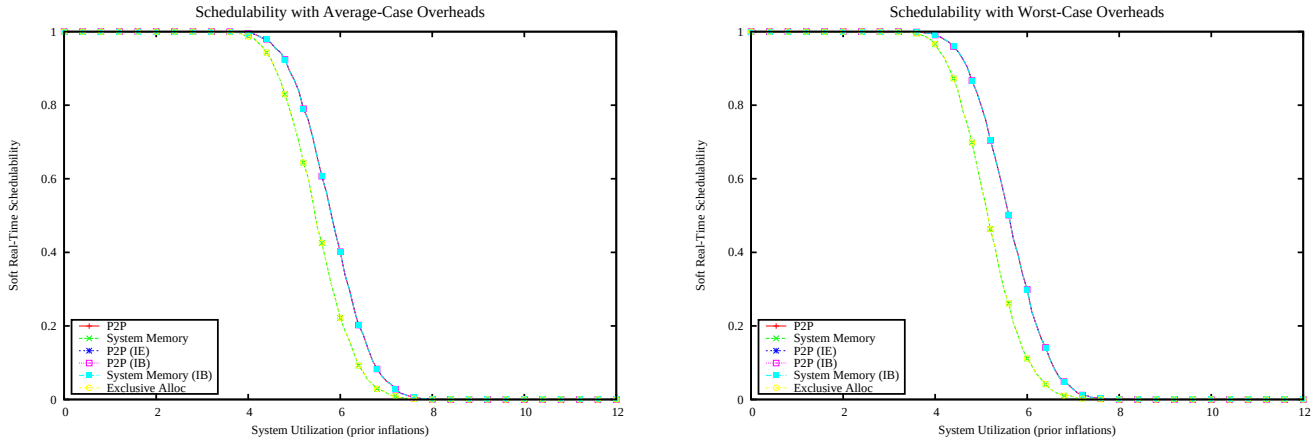

Figure 6456: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

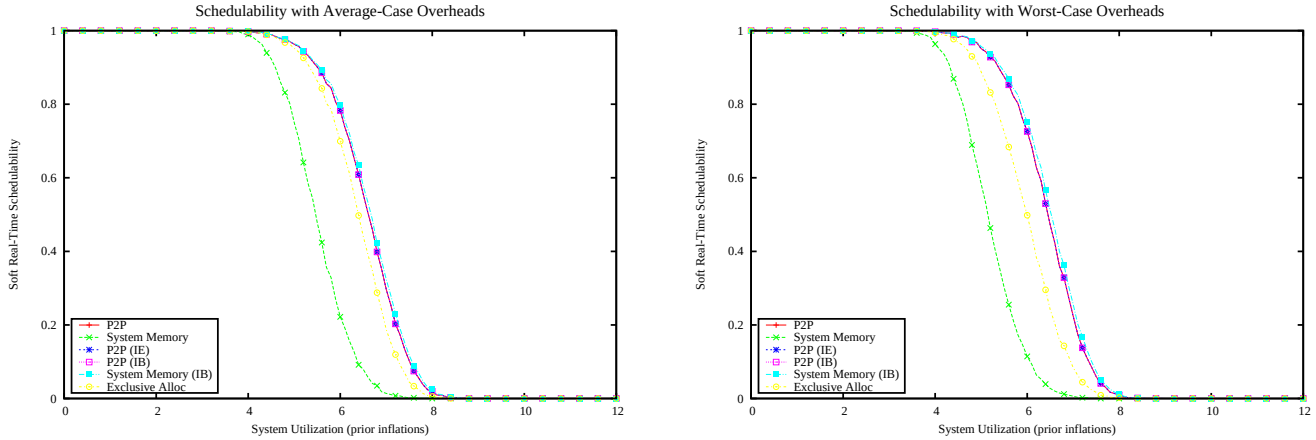

Figure 6457: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

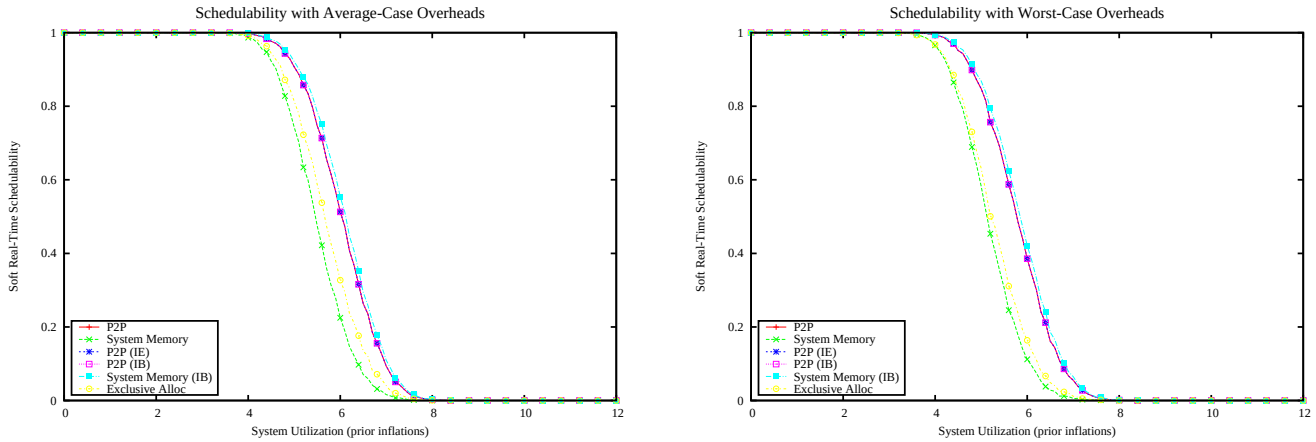

Figure 6458: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

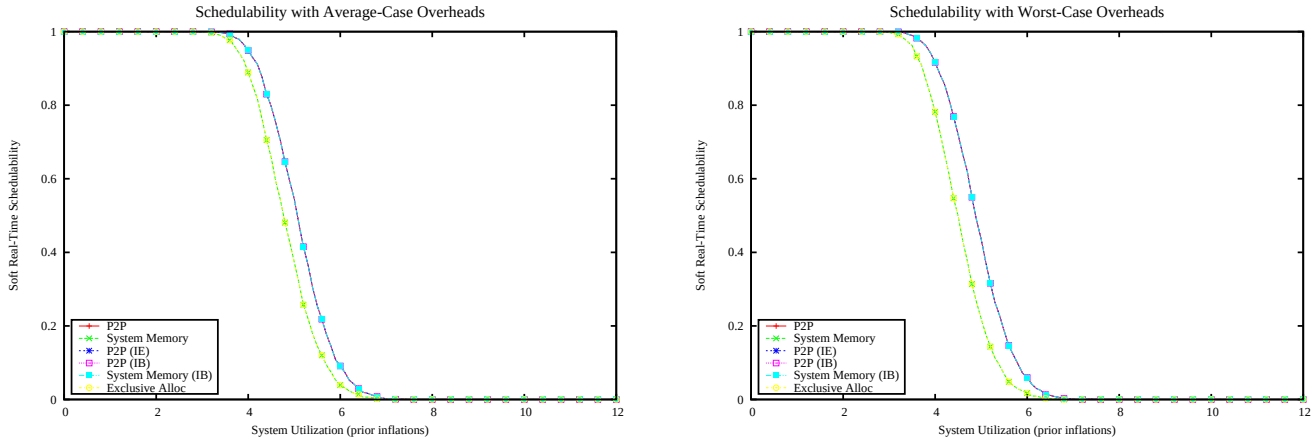

Figure 6459: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

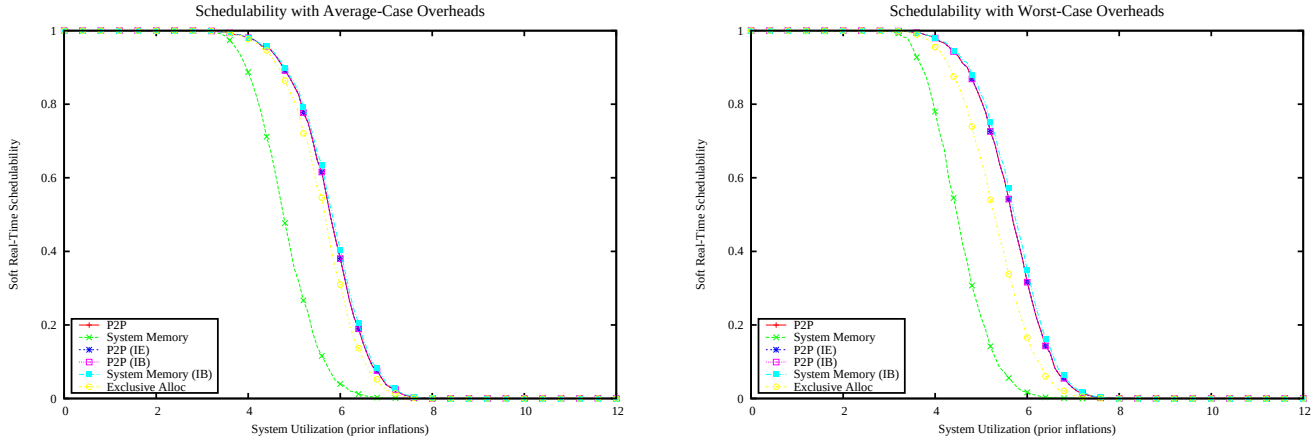

Figure 6460: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

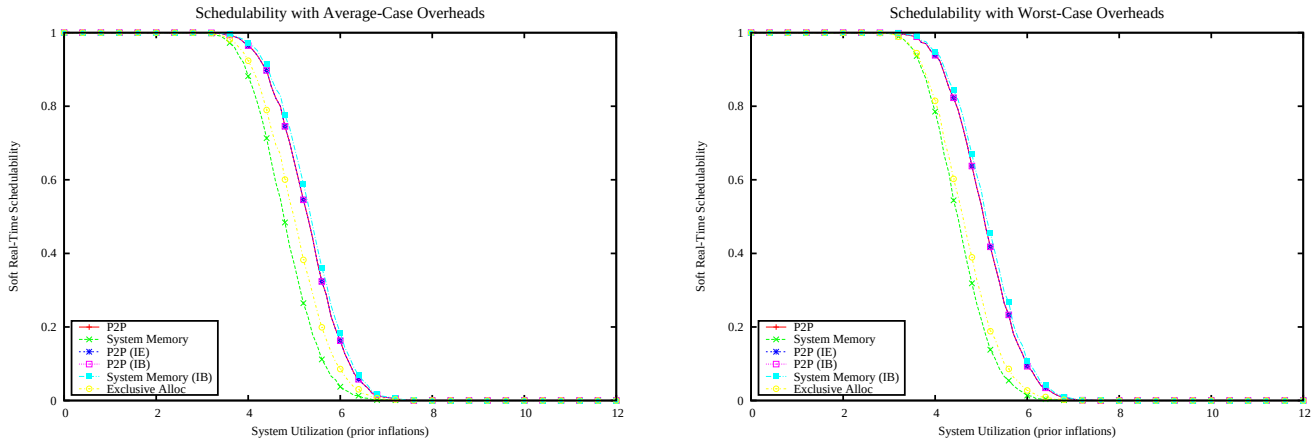

Figure 6461: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

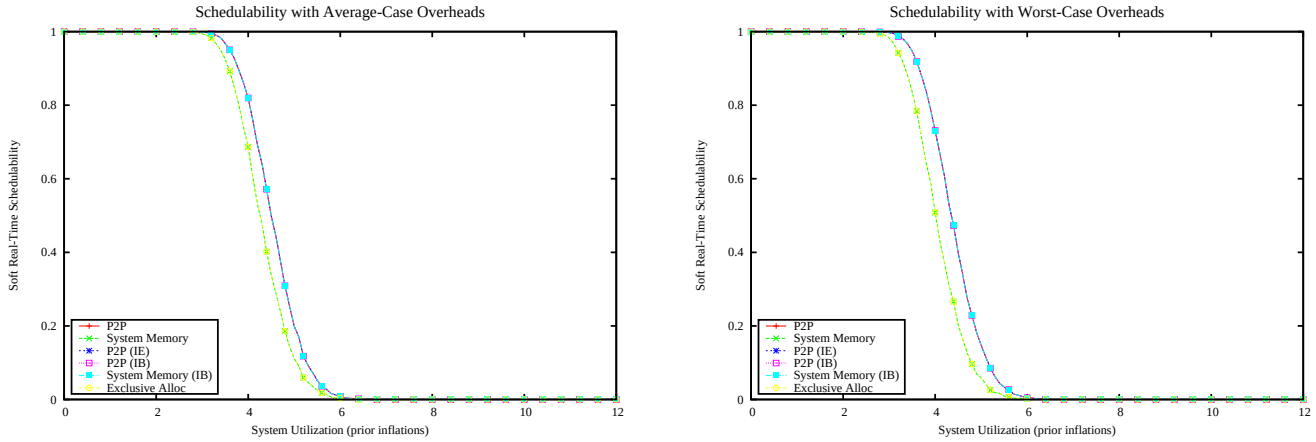

Figure 6462: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

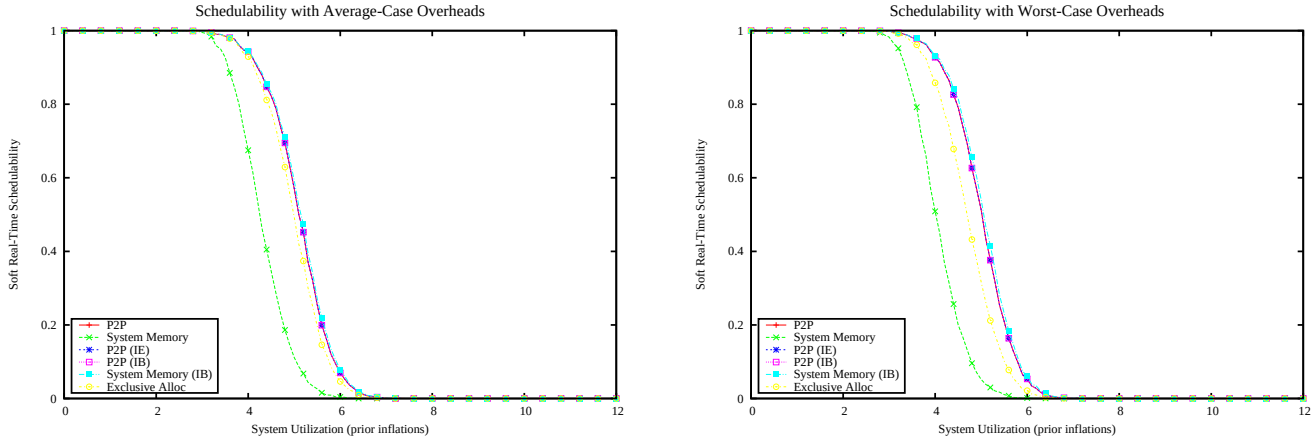

Figure 6463: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

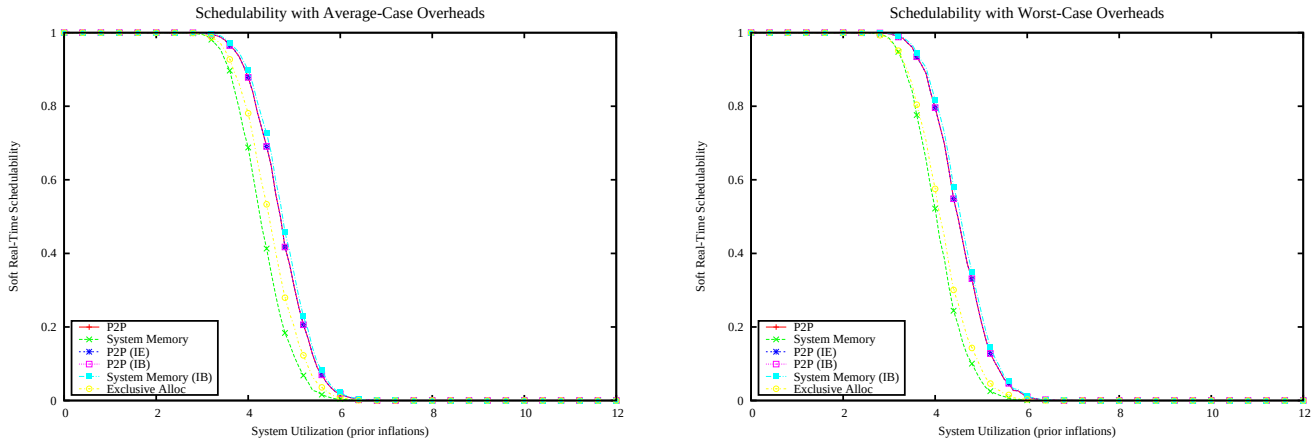

Figure 6464: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

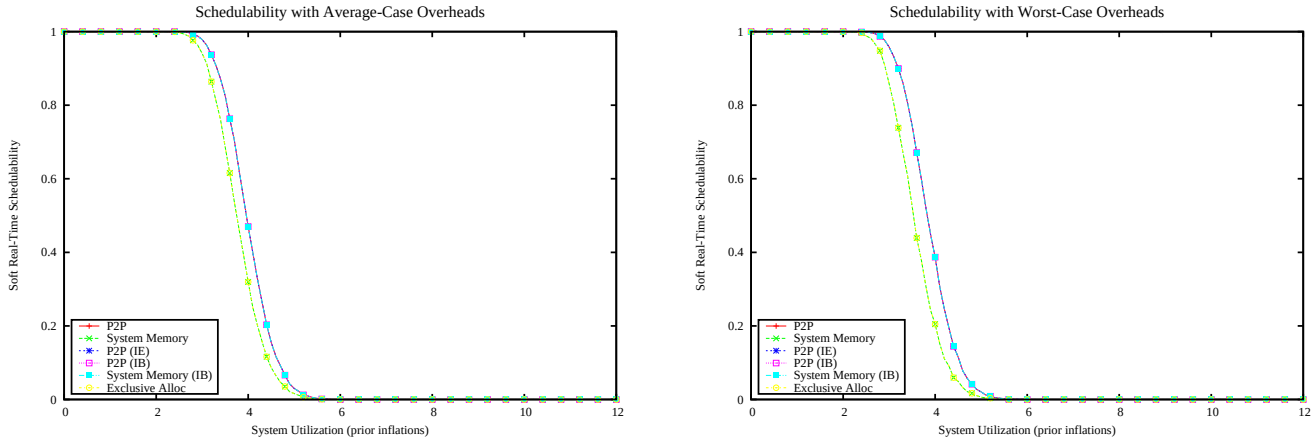

Figure 6465: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

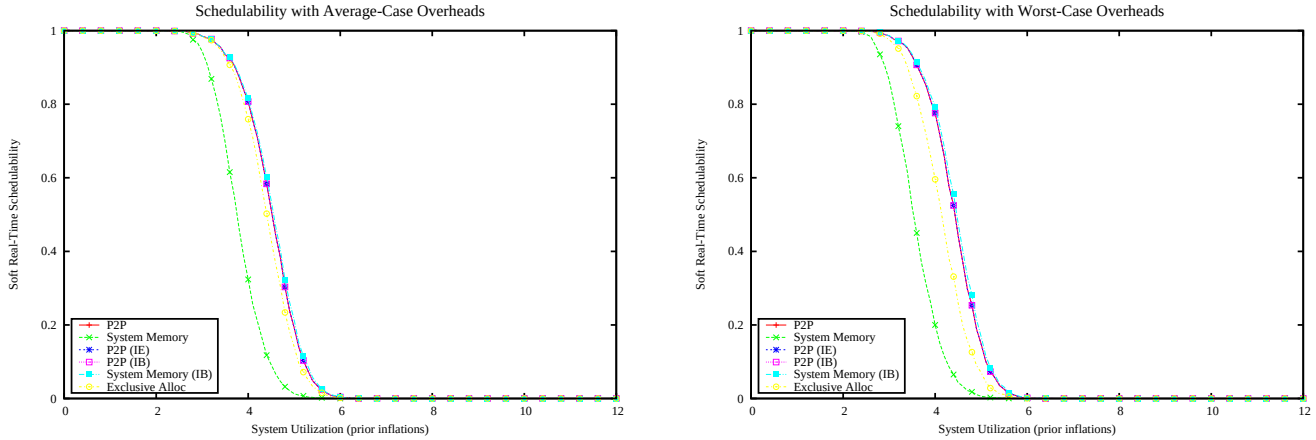

Figure 6466: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

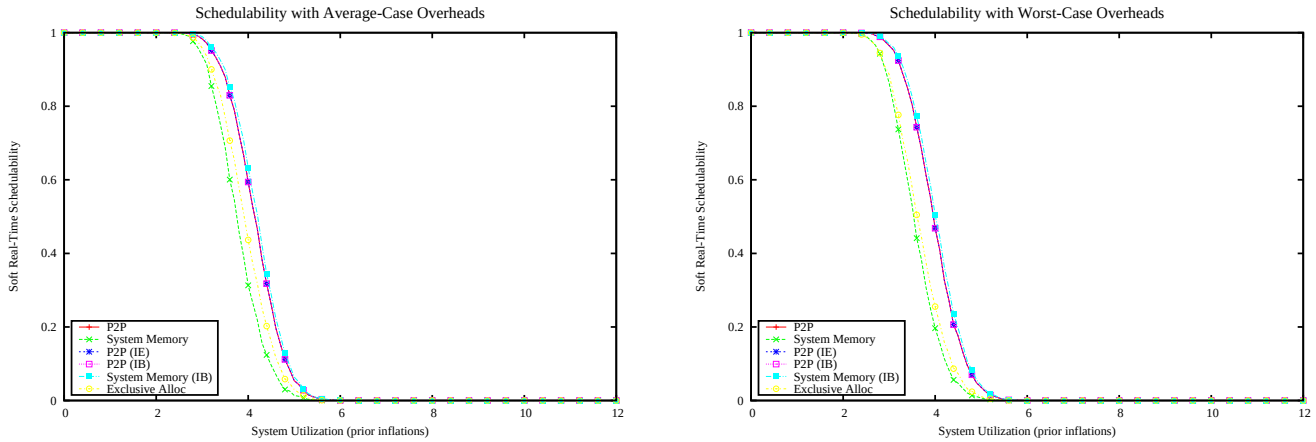

Figure 6467: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

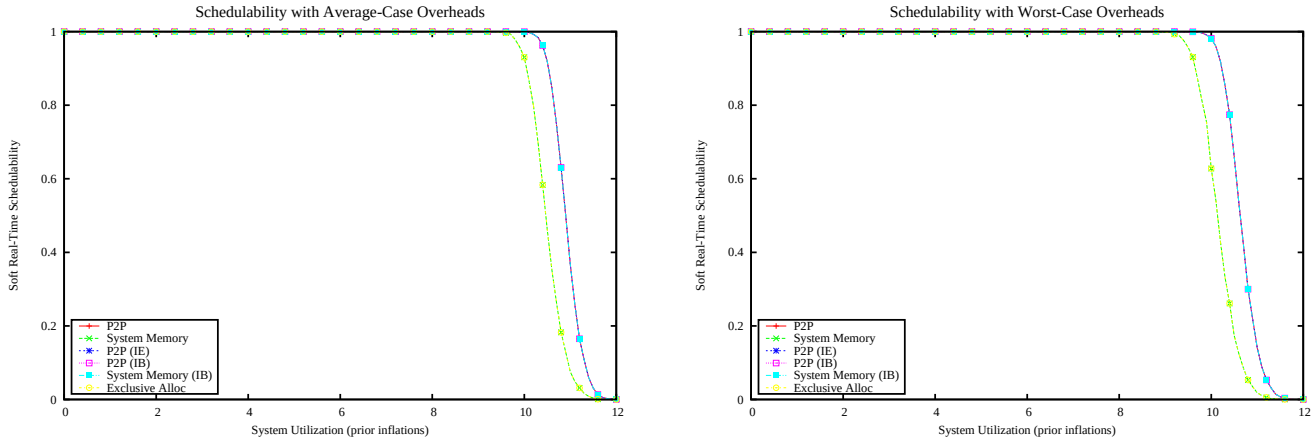

Figure 6468: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

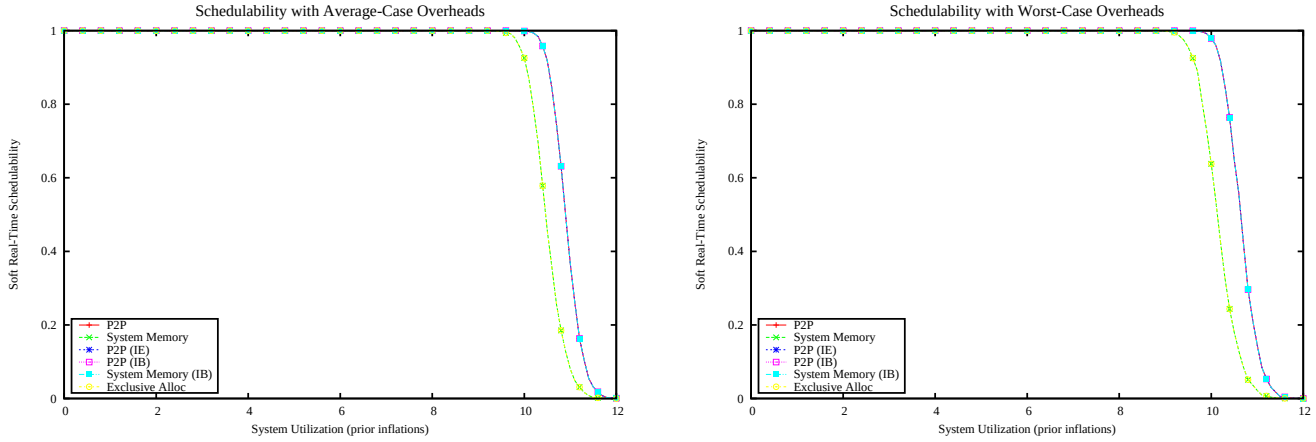

Figure 6469: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

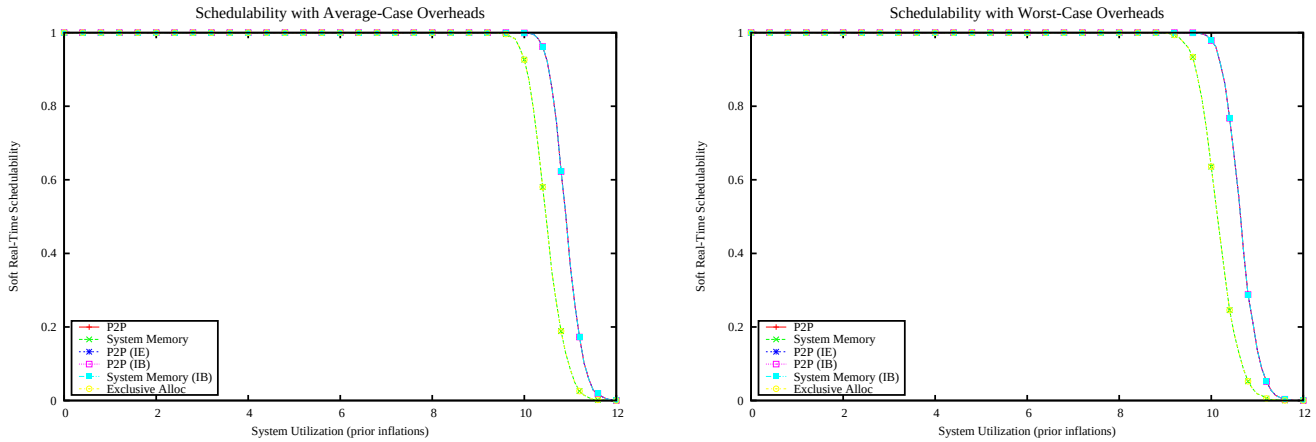

Figure 6470: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

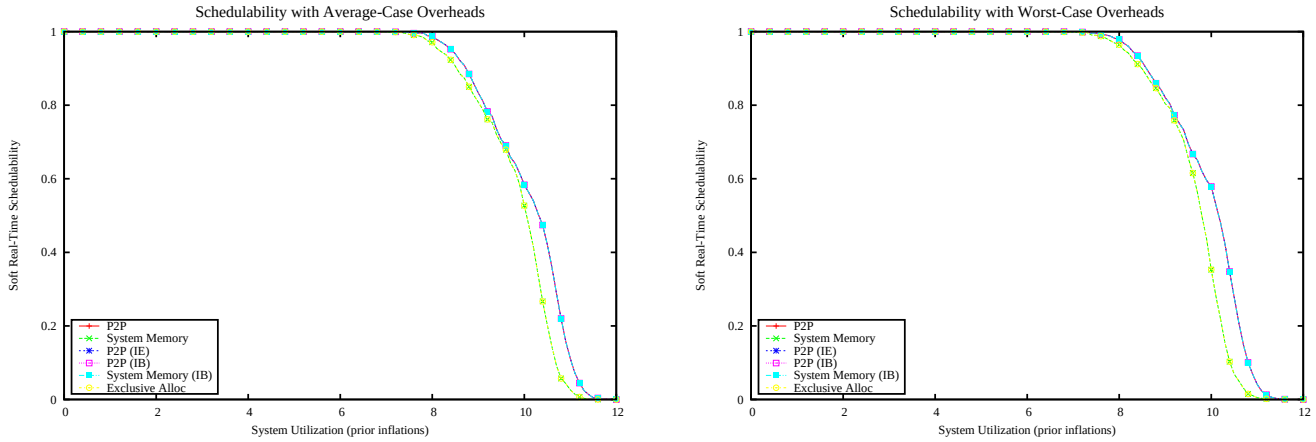

Figure 6471: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

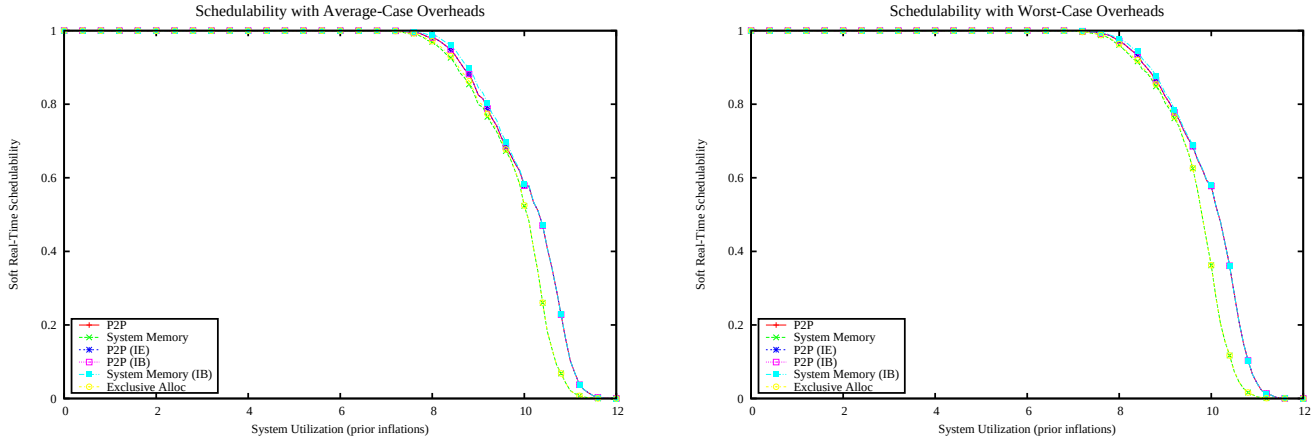

Figure 6472: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

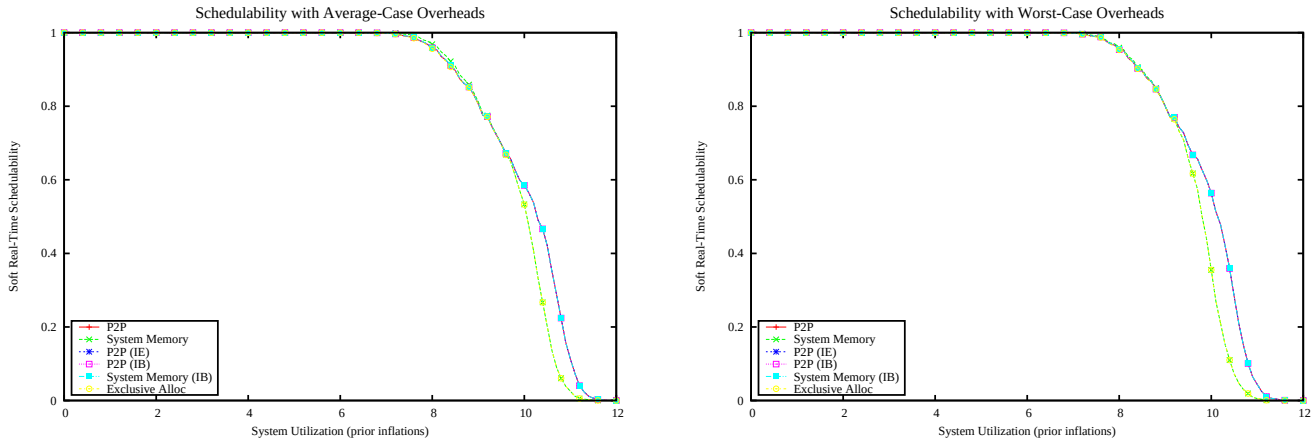

Figure 6473: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

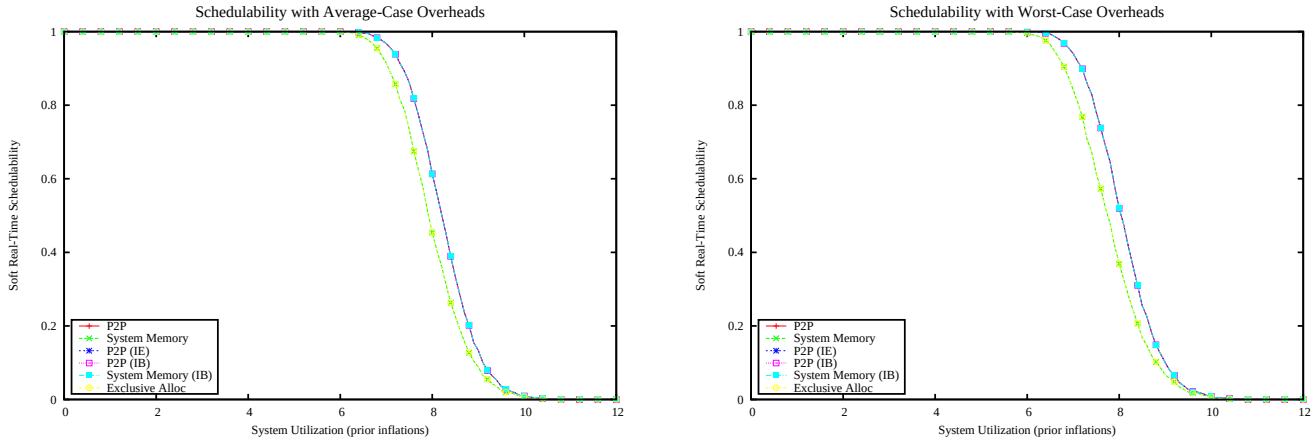

Figure 6474: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

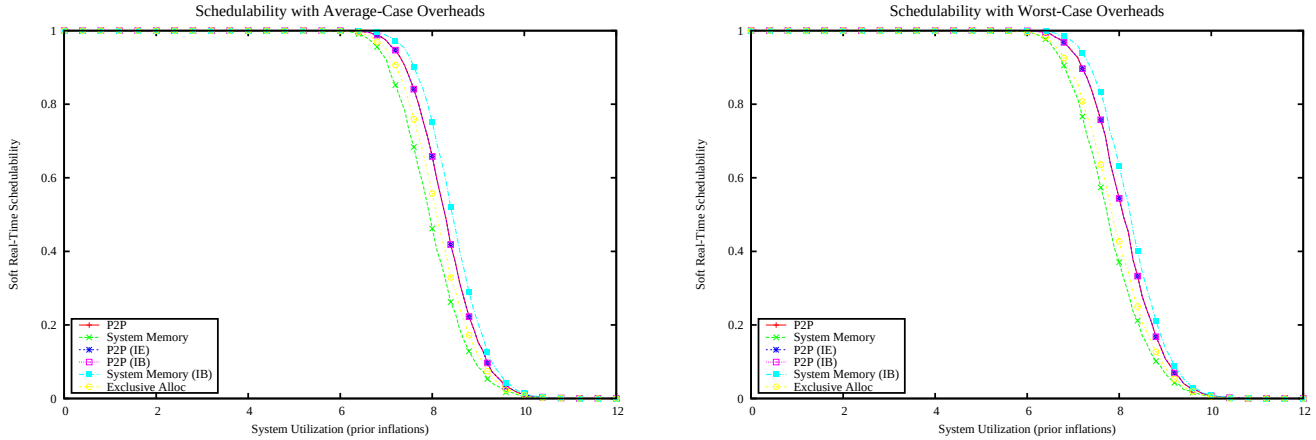

Figure 6475: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

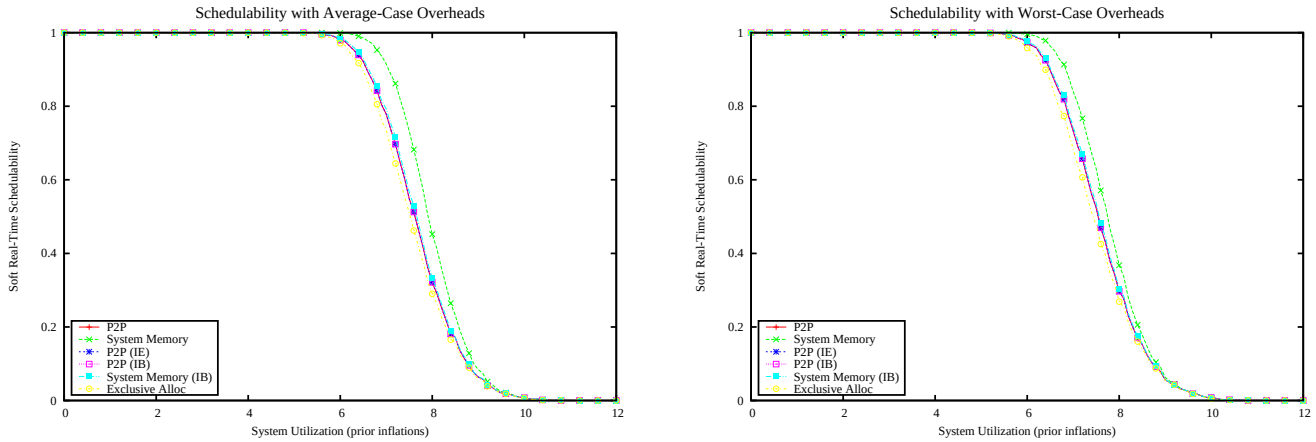

Figure 6476: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

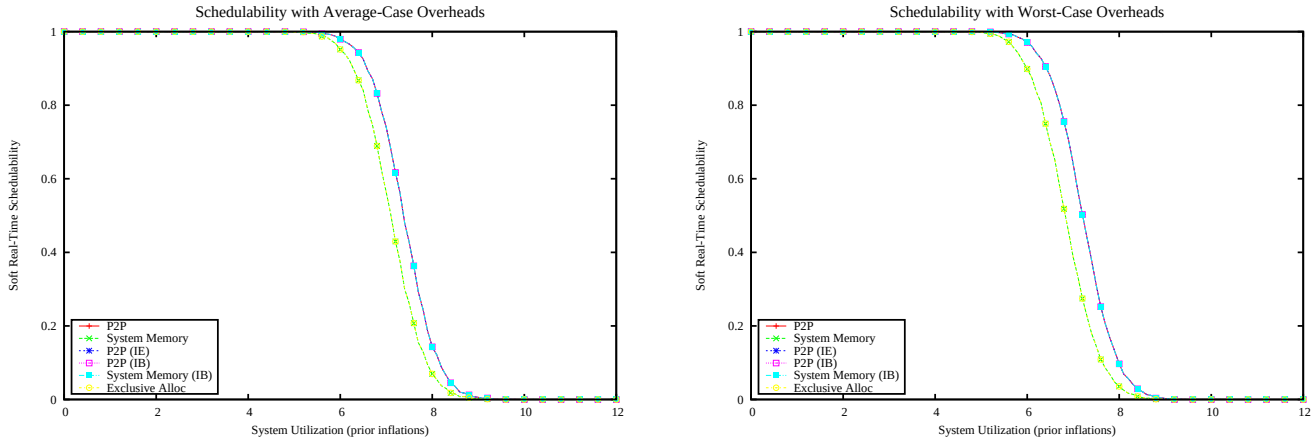

Figure 6477: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

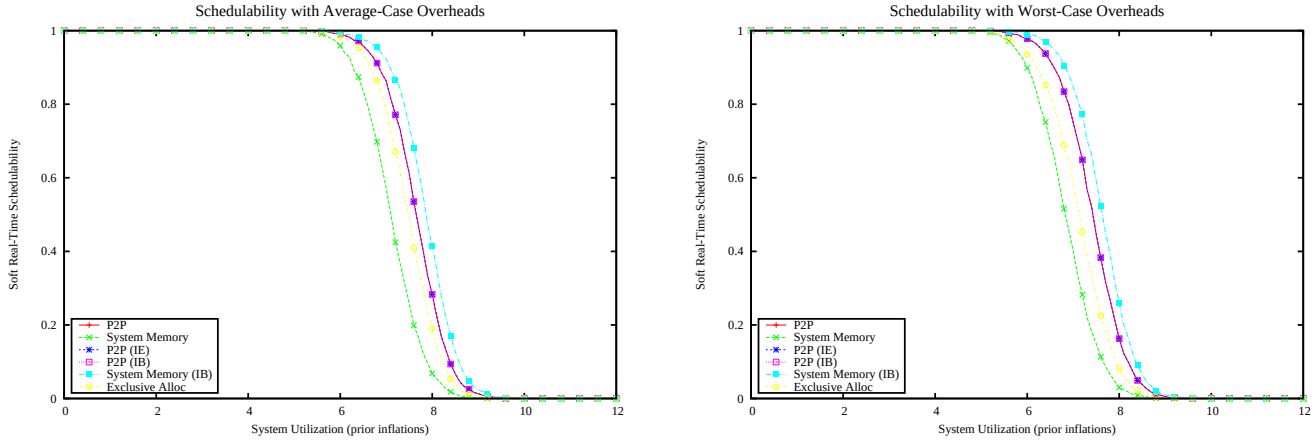

Figure 6478: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

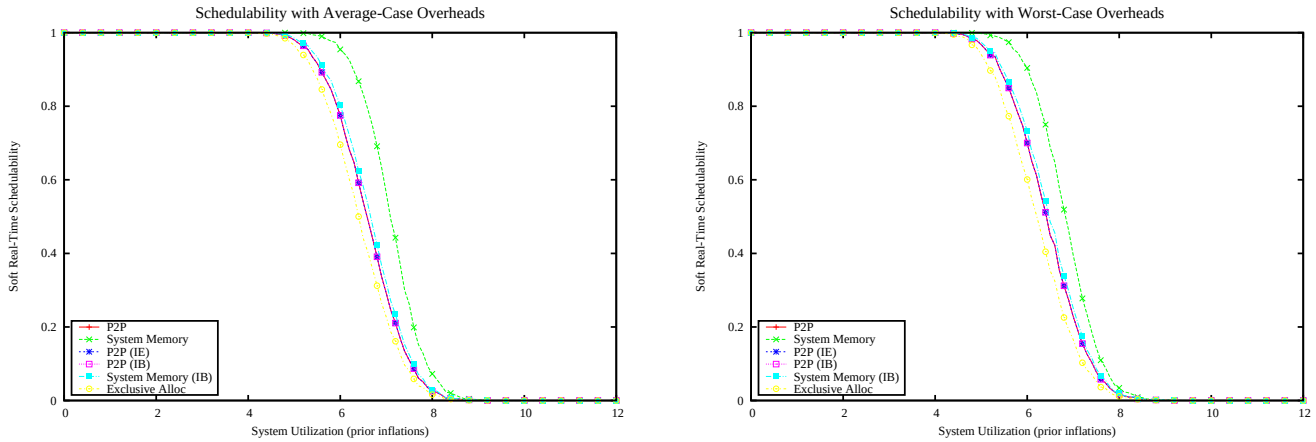

Figure 6479: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

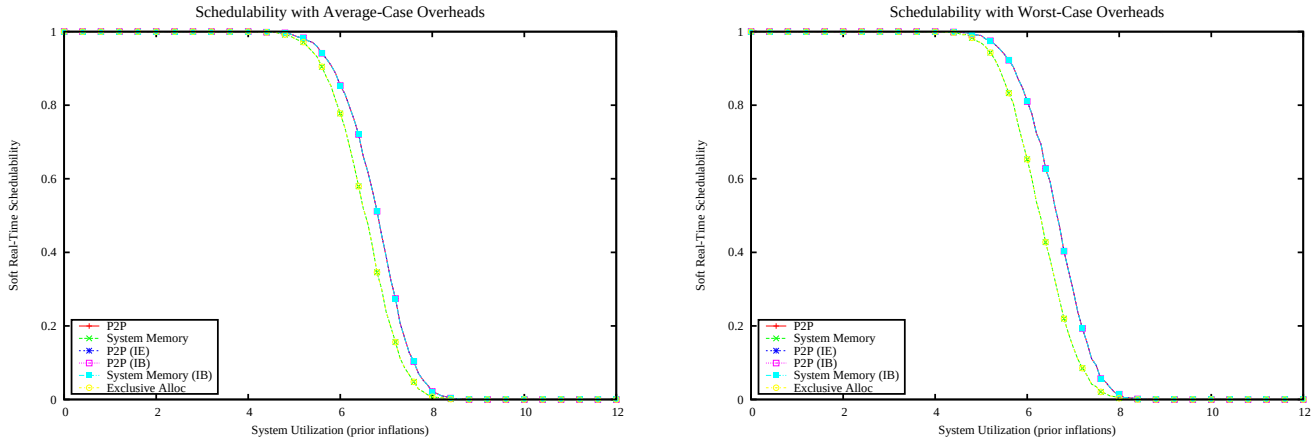

Figure 6480: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

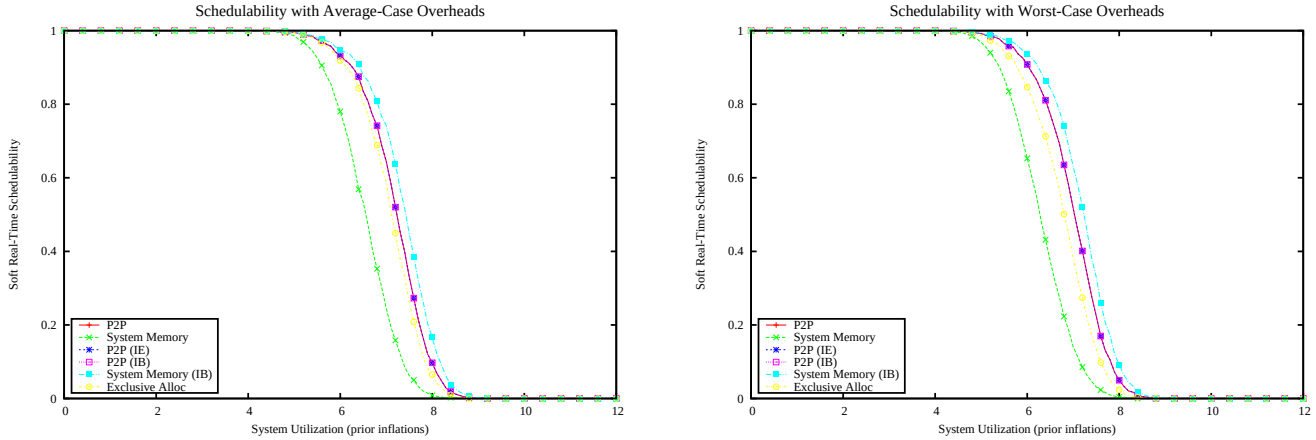

Figure 6481: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

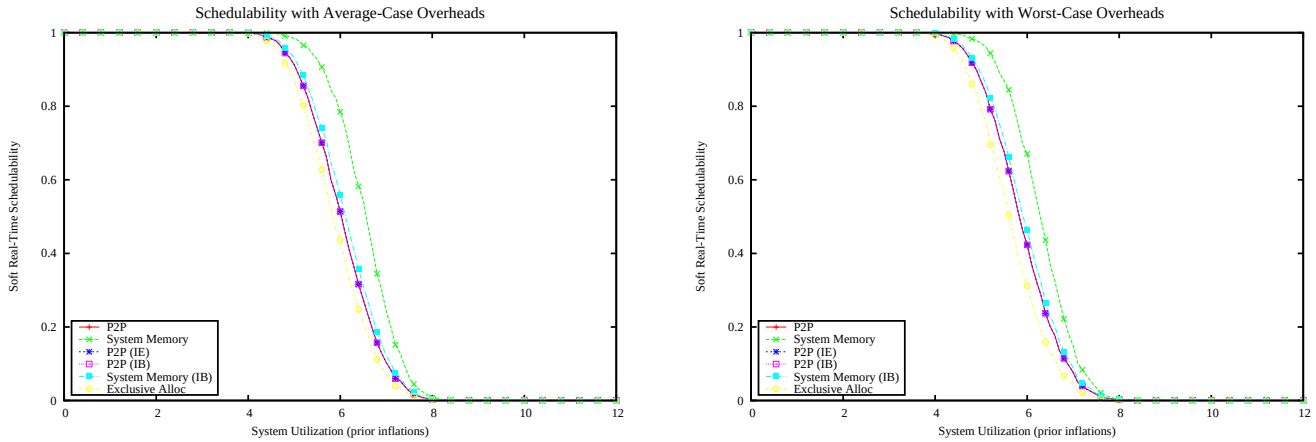

Figure 6482: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

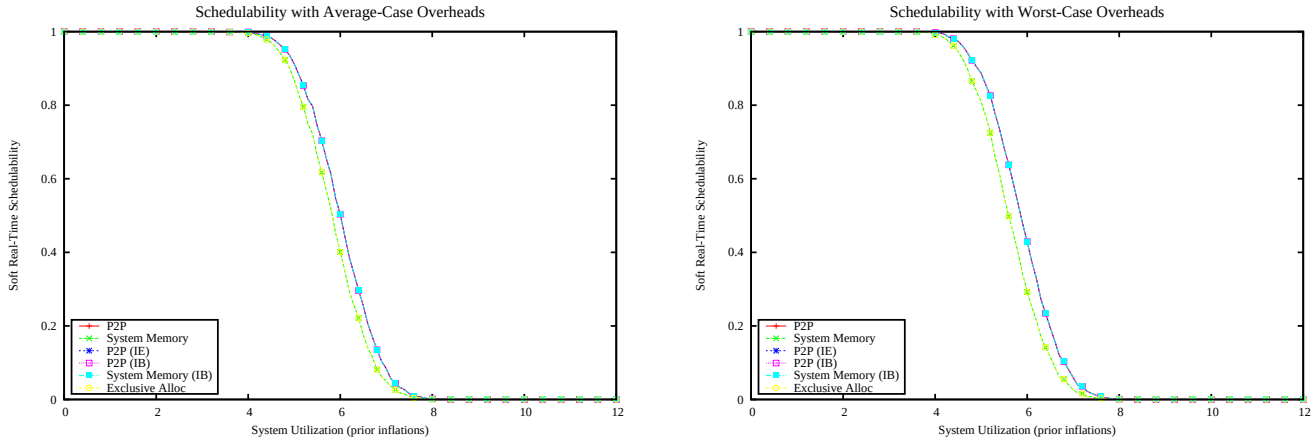

Figure 6483: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

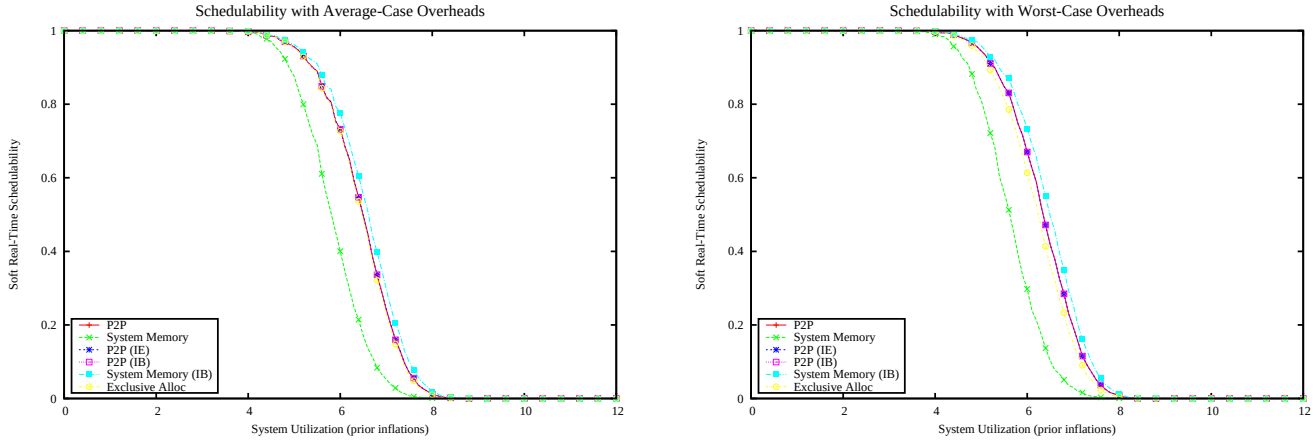

Figure 6484: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

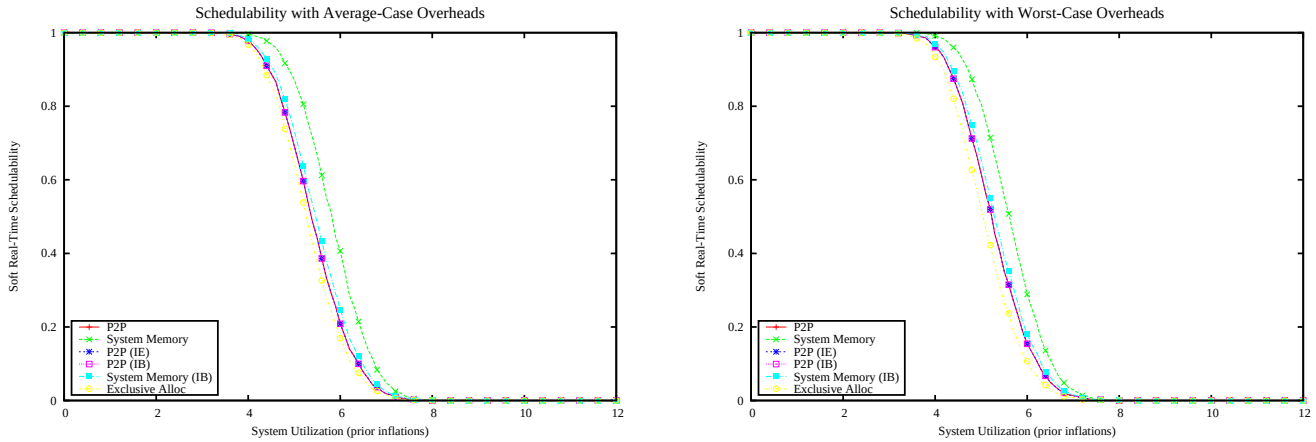

Figure 6485: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

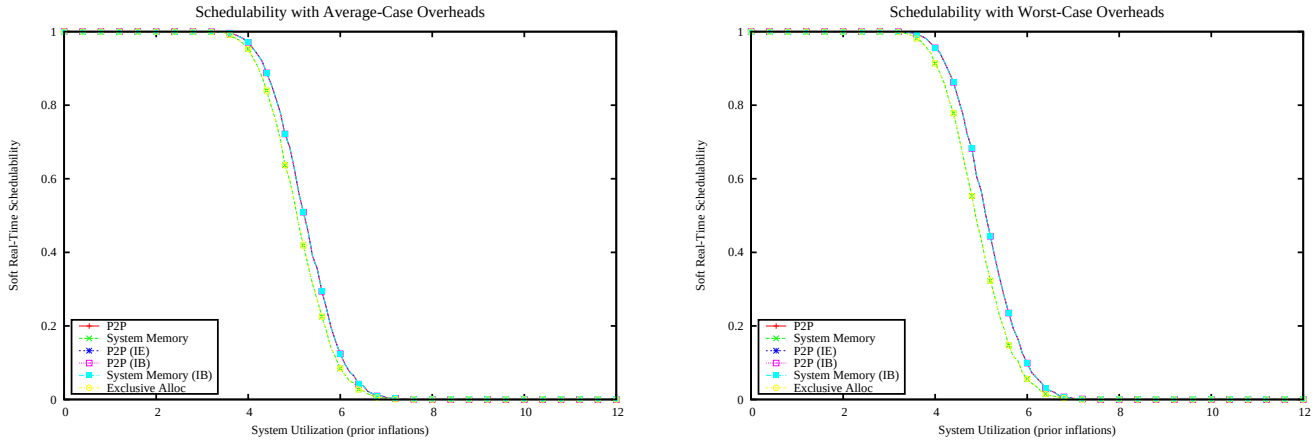

Figure 6486: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

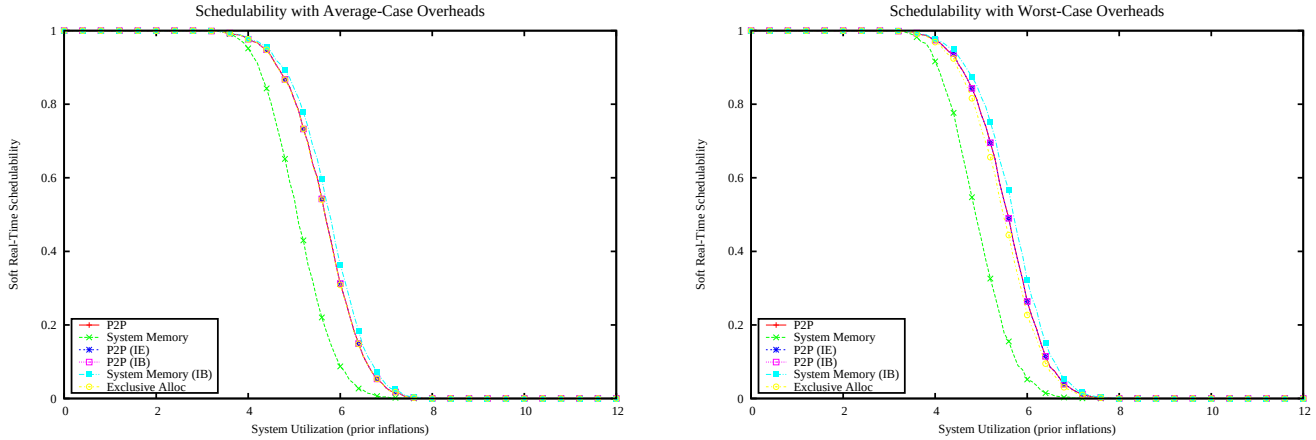

Figure 6487: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

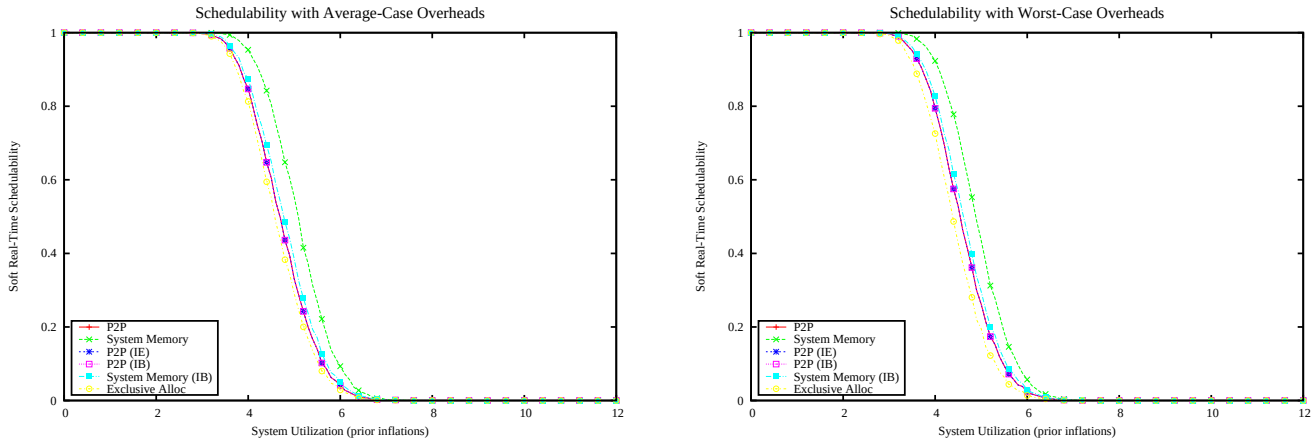

Figure 6488: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

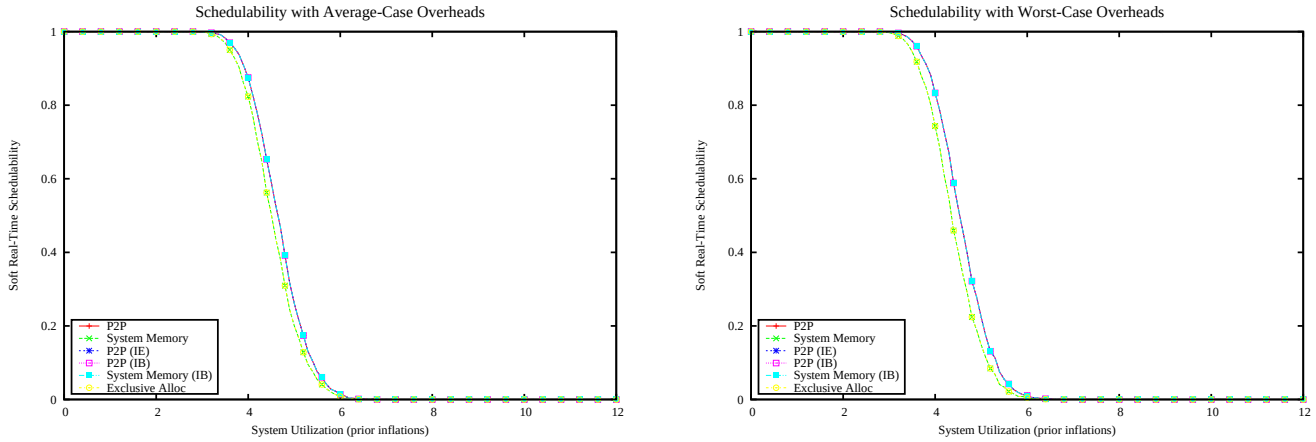

Figure 6489: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

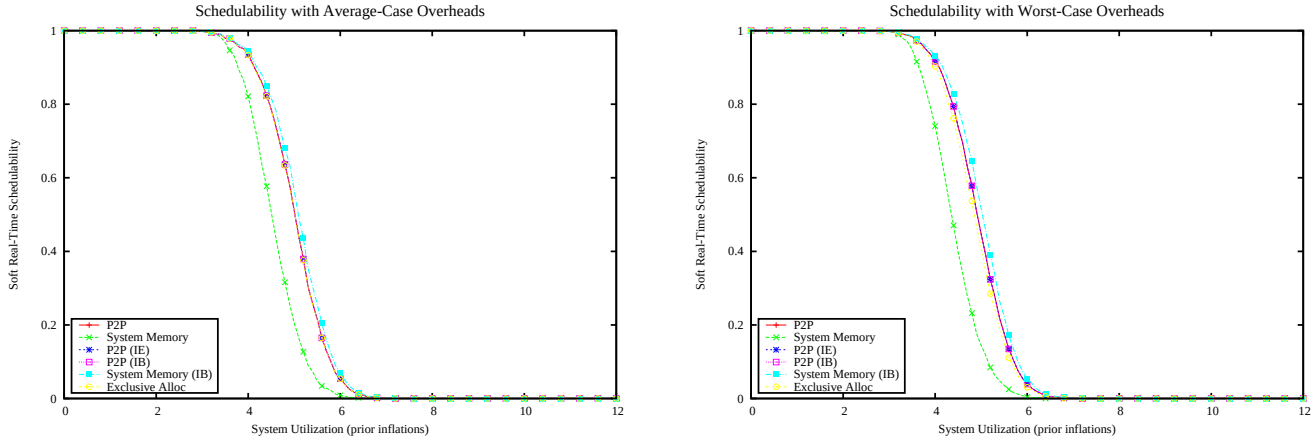

Figure 6490: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

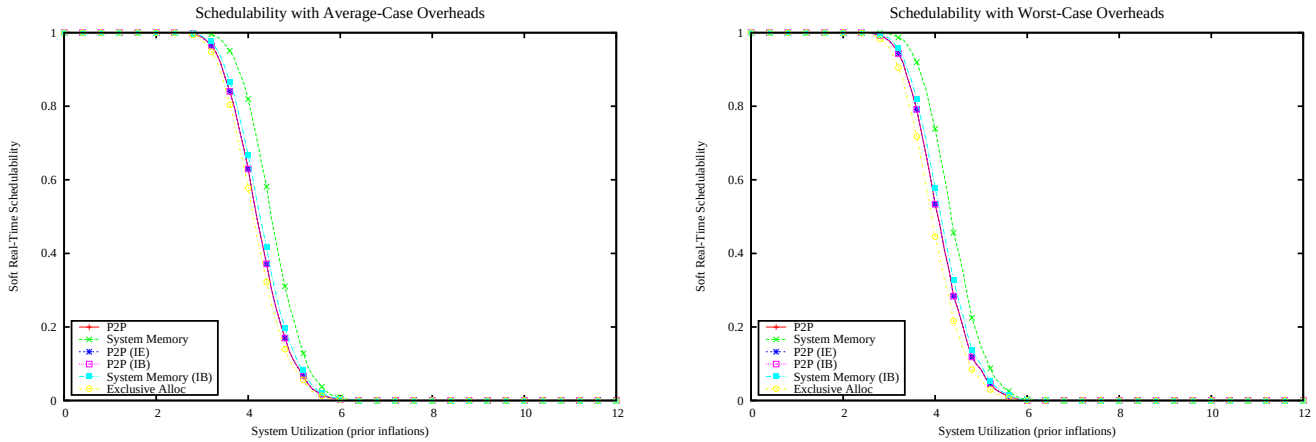

Figure 6491: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

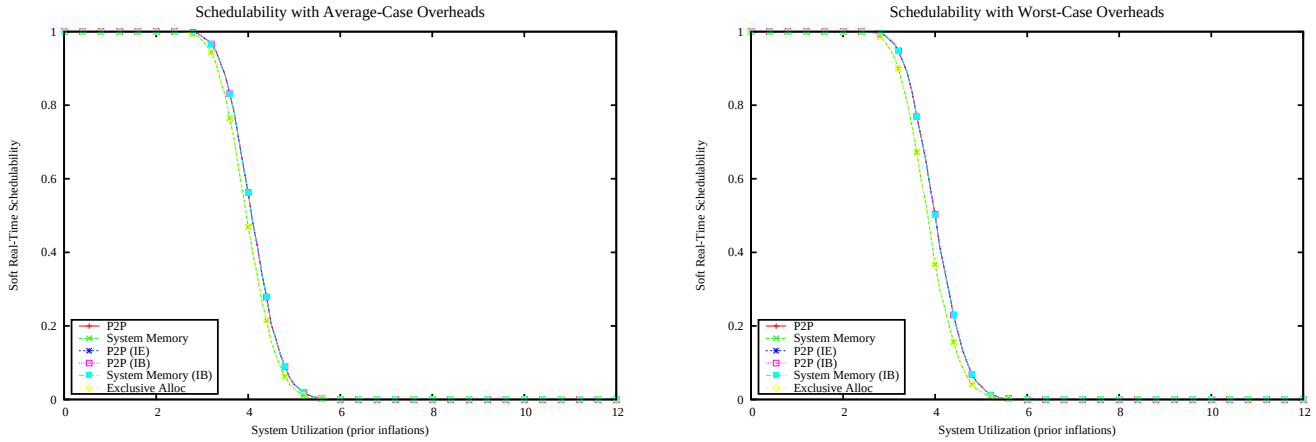

Figure 6492: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

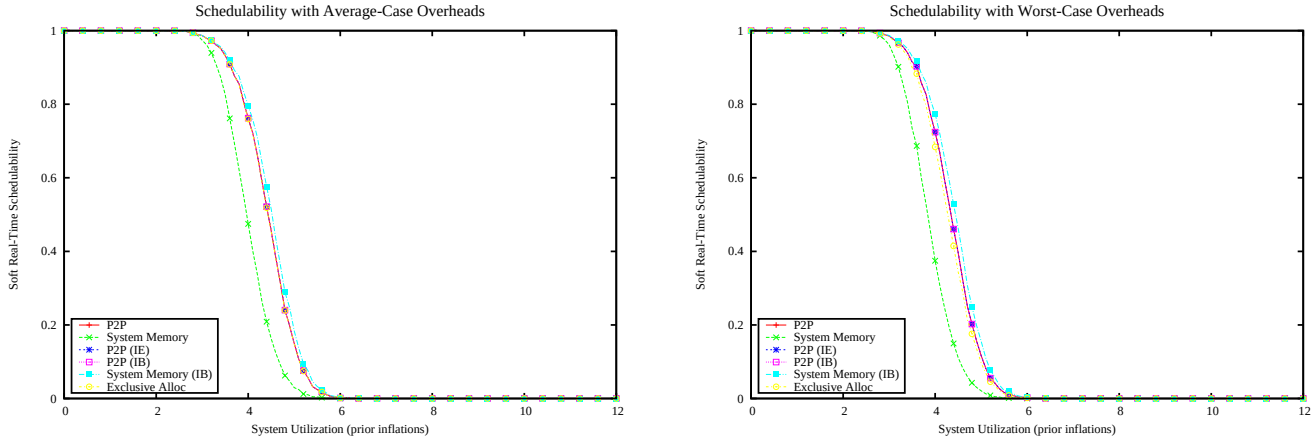

Figure 6493: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

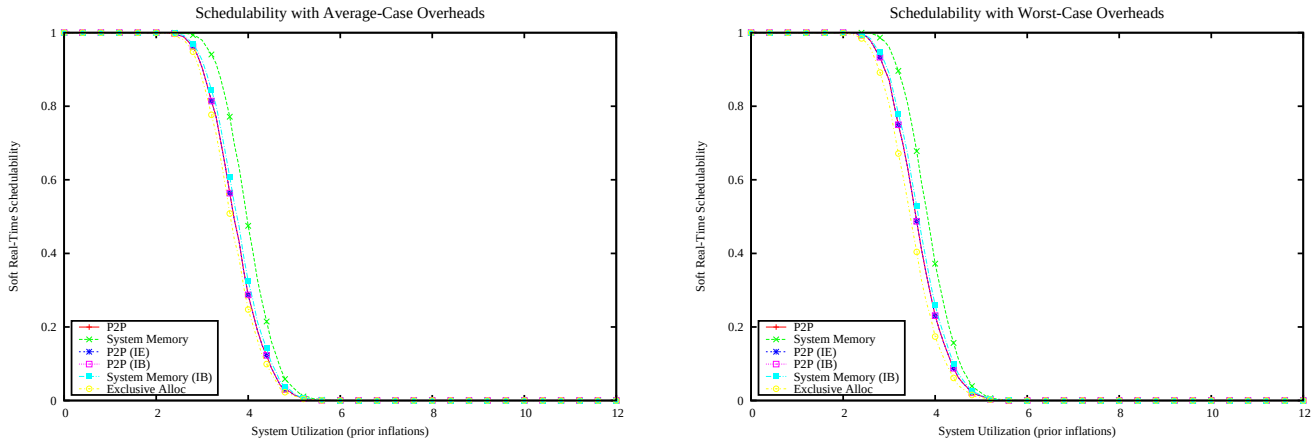

Figure 6494: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 8/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

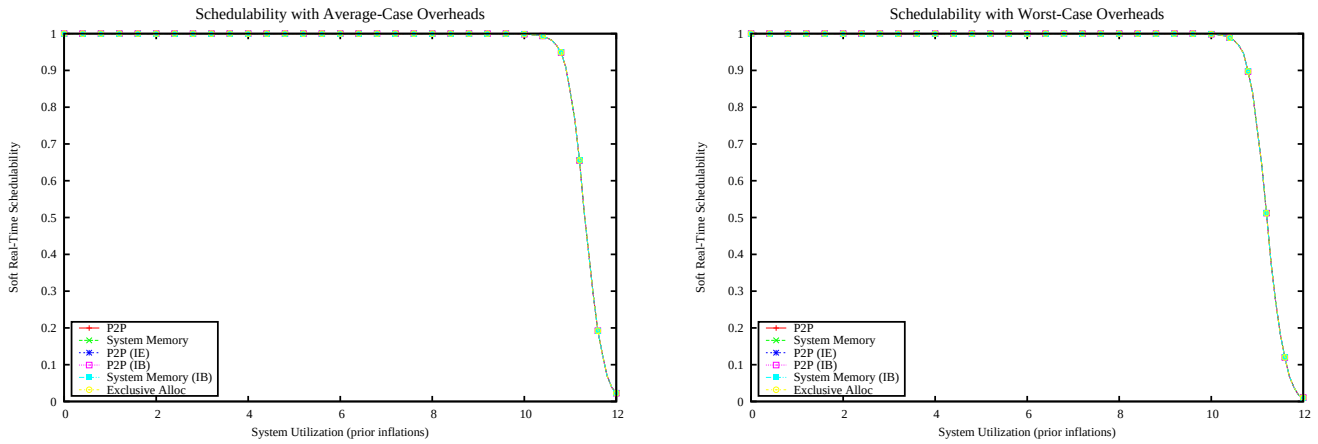

Figure 6495: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

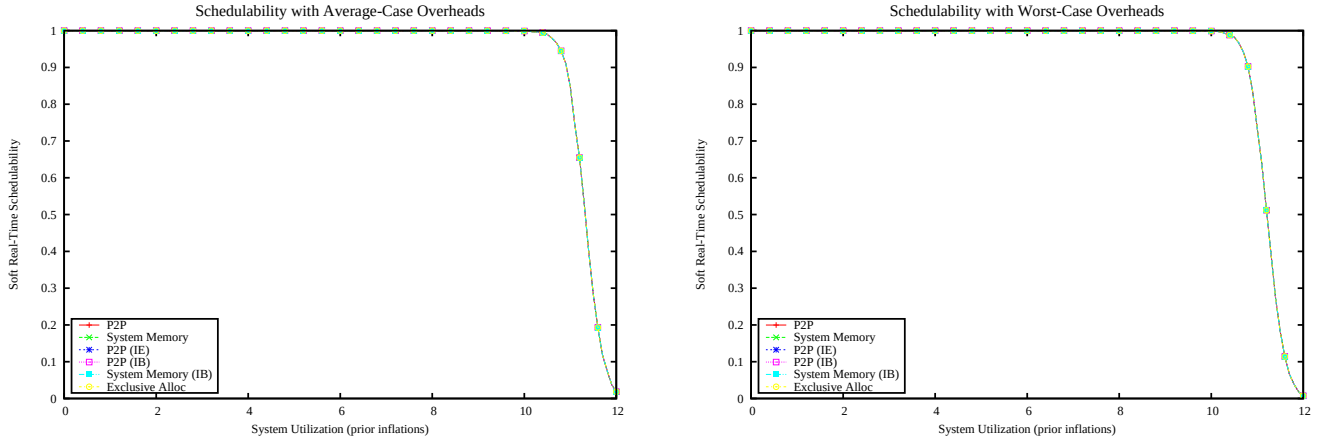

Figure 6496: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

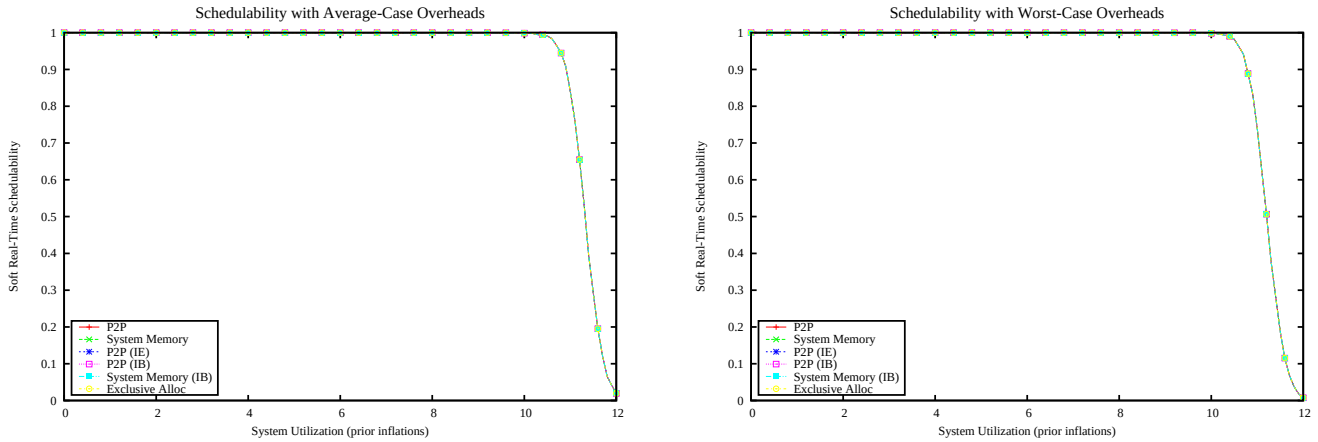

Figure 6497: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

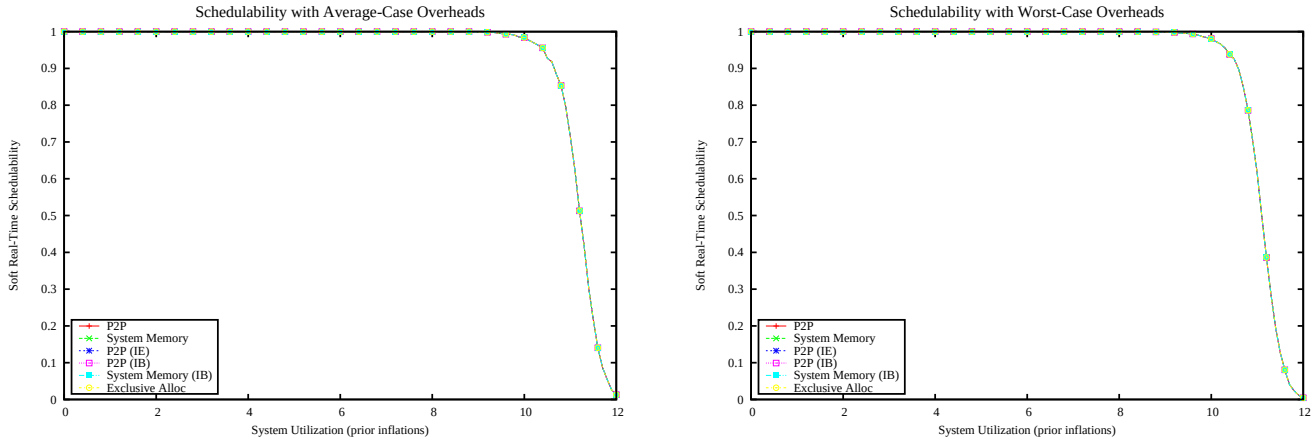

Figure 6498: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

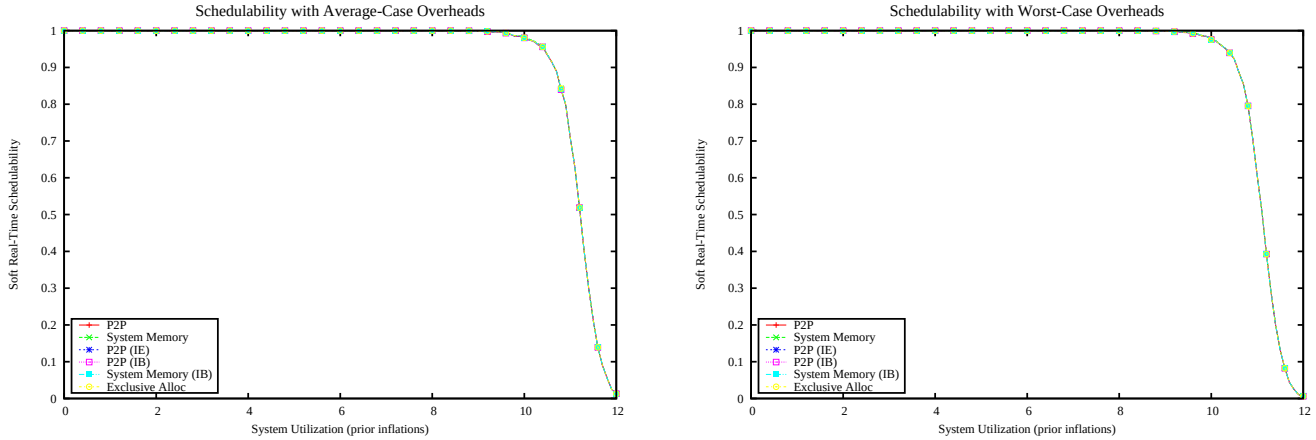

Figure 6499: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

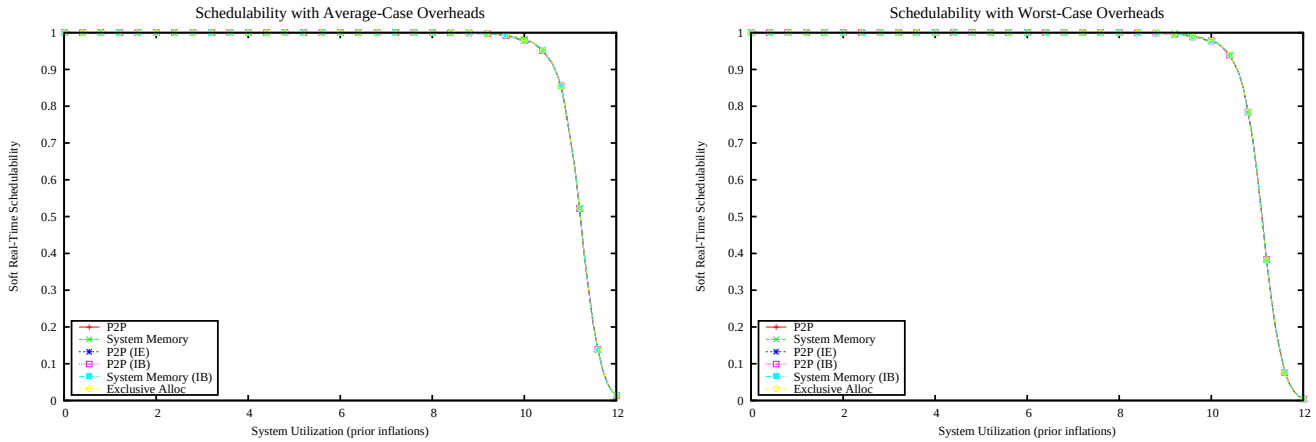

Figure 6500: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

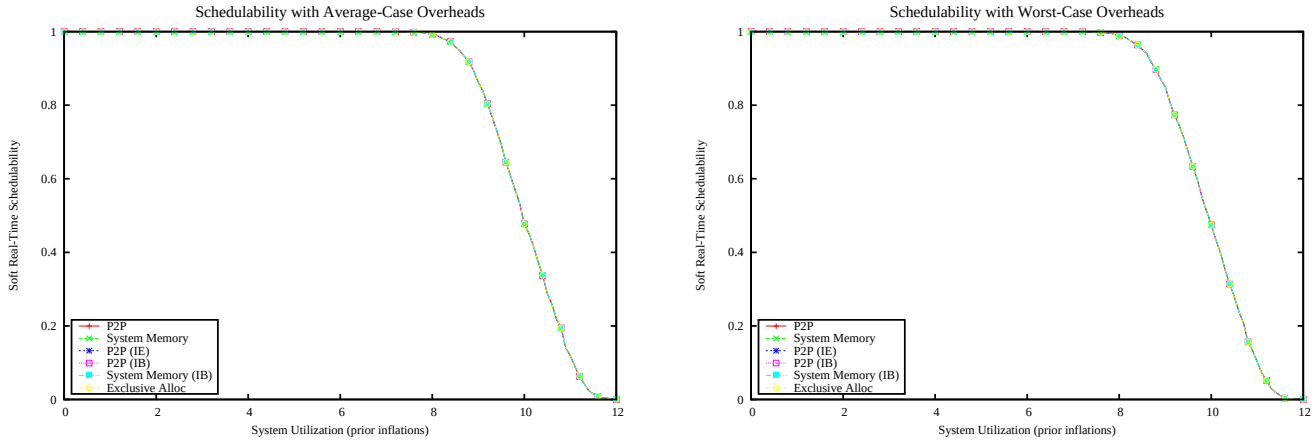

Figure 6501: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

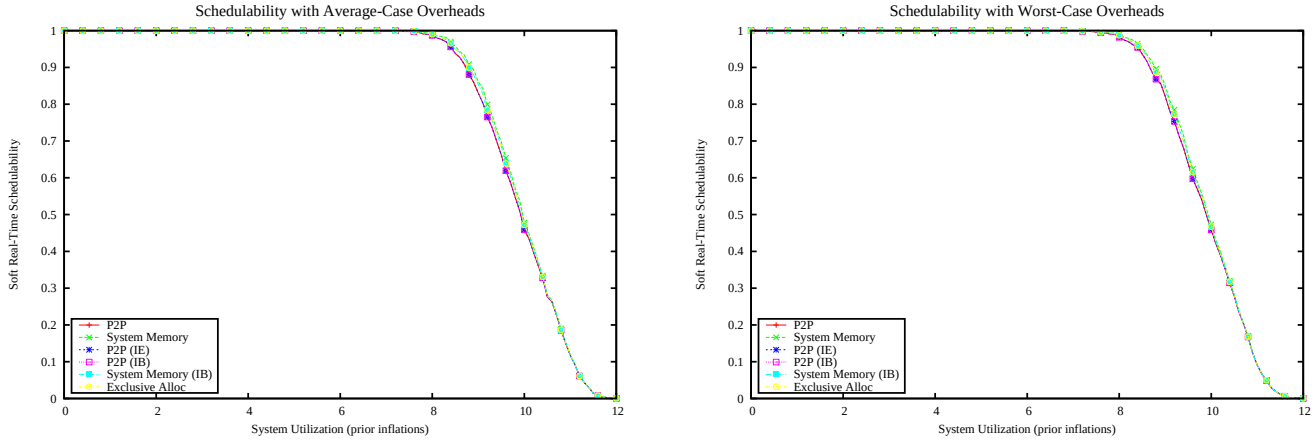

Figure 6502: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

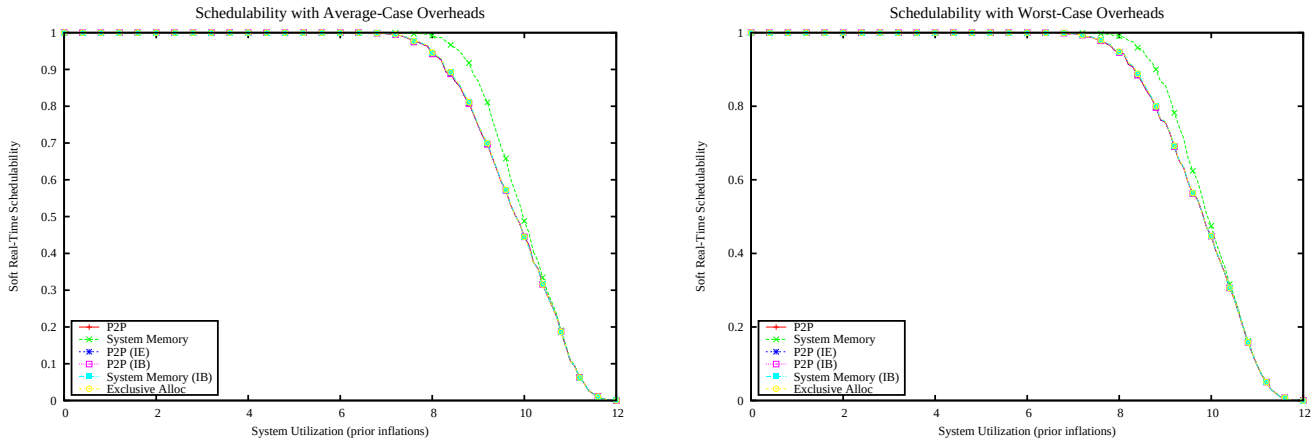

Figure 6503: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

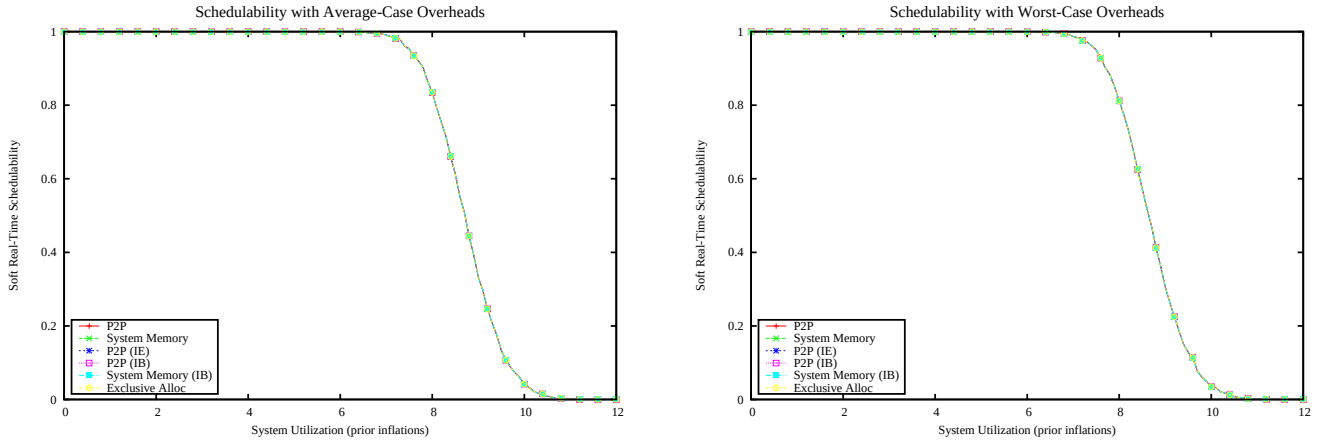

Figure 6504: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

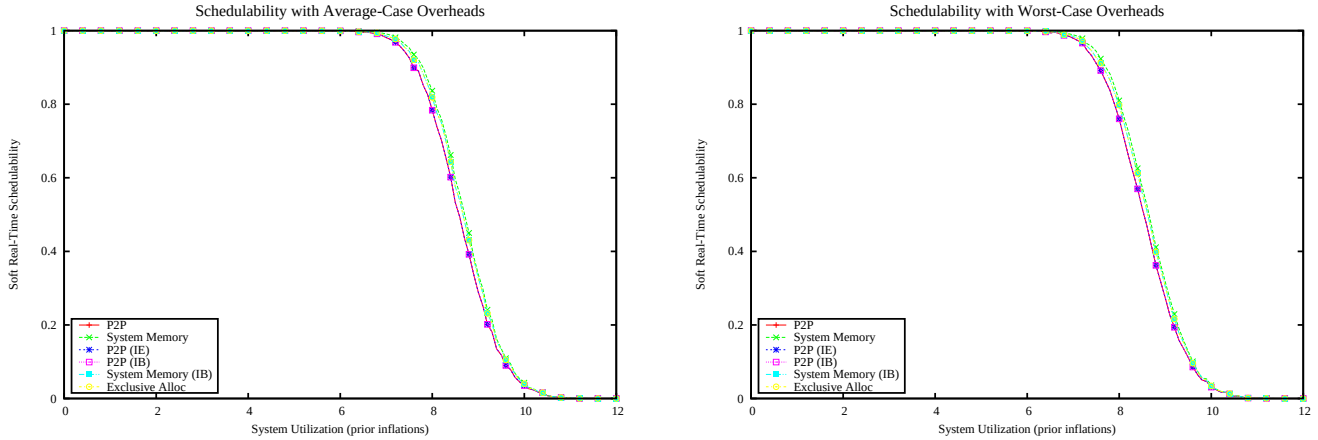

Figure 6505: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

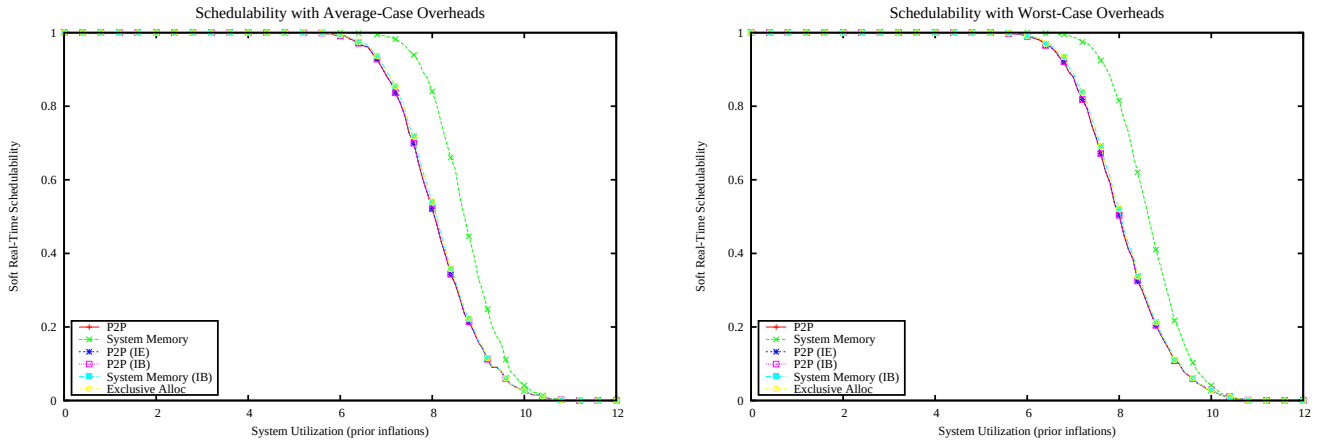

Figure 6506: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

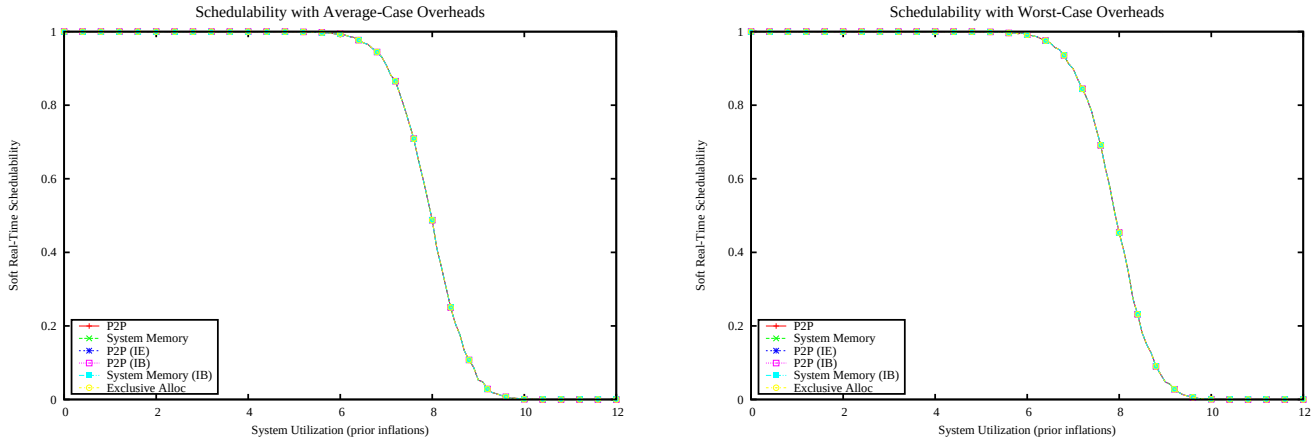

Figure 6507: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

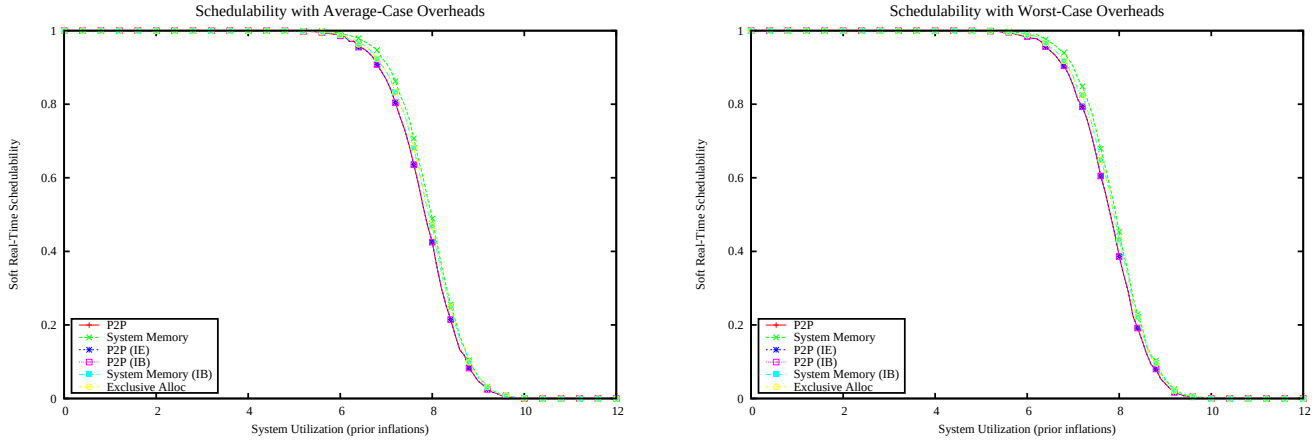

Figure 6508: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

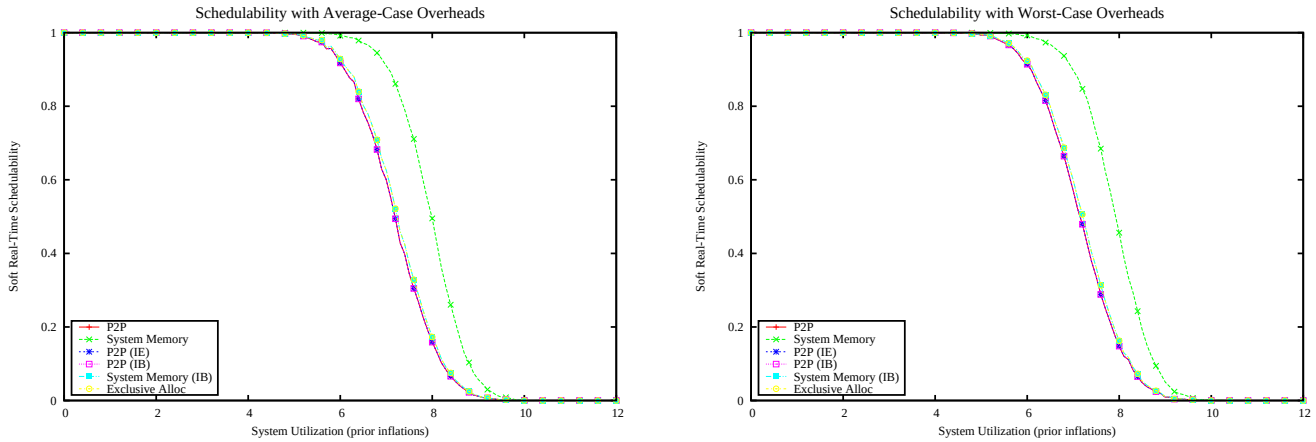

Figure 6509: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

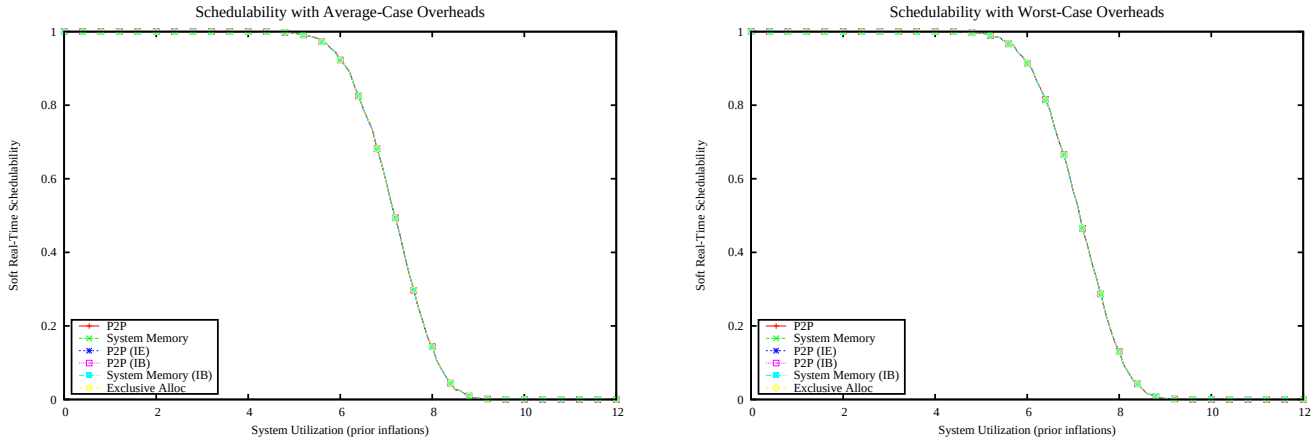

Figure 6510: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

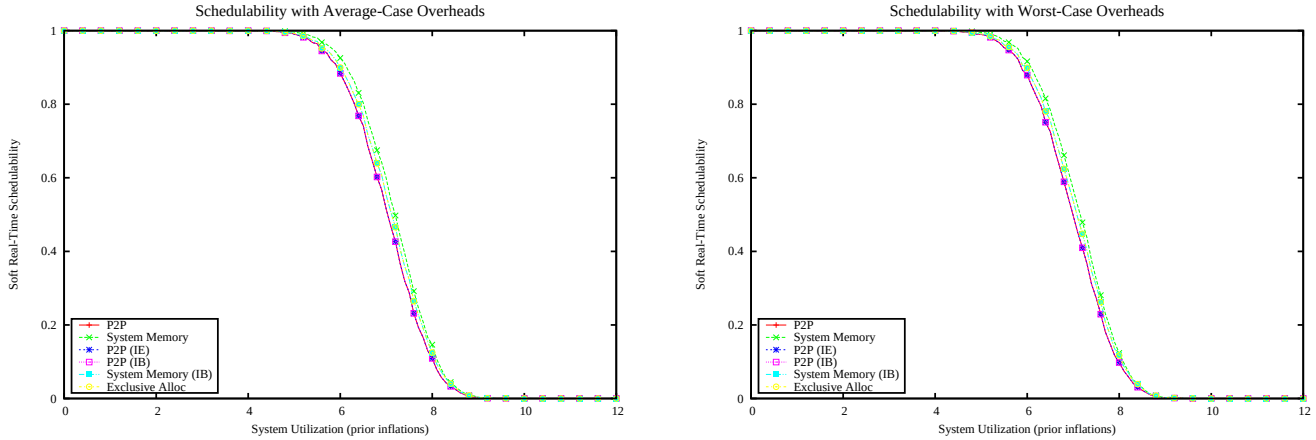

Figure 6511: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

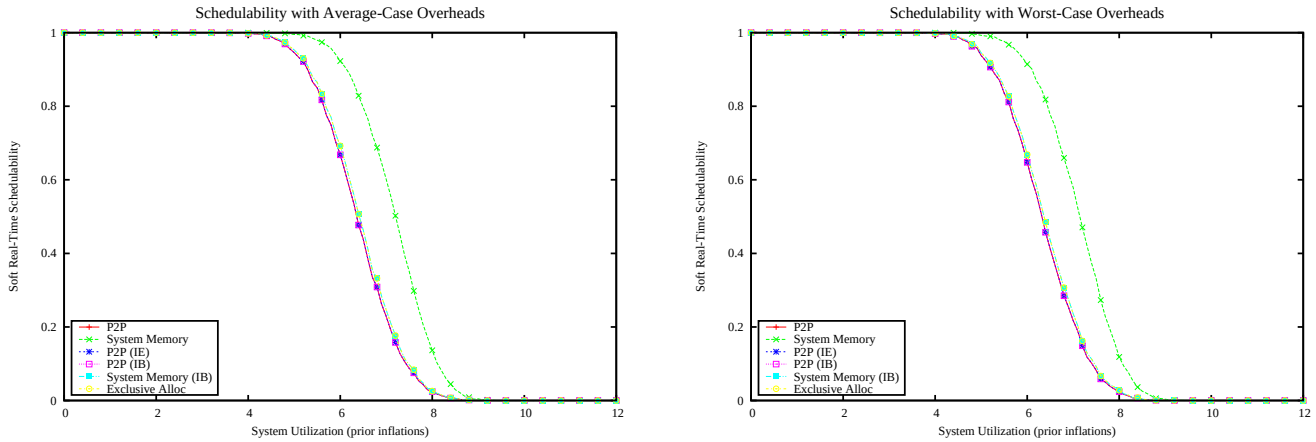

Figure 6512: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

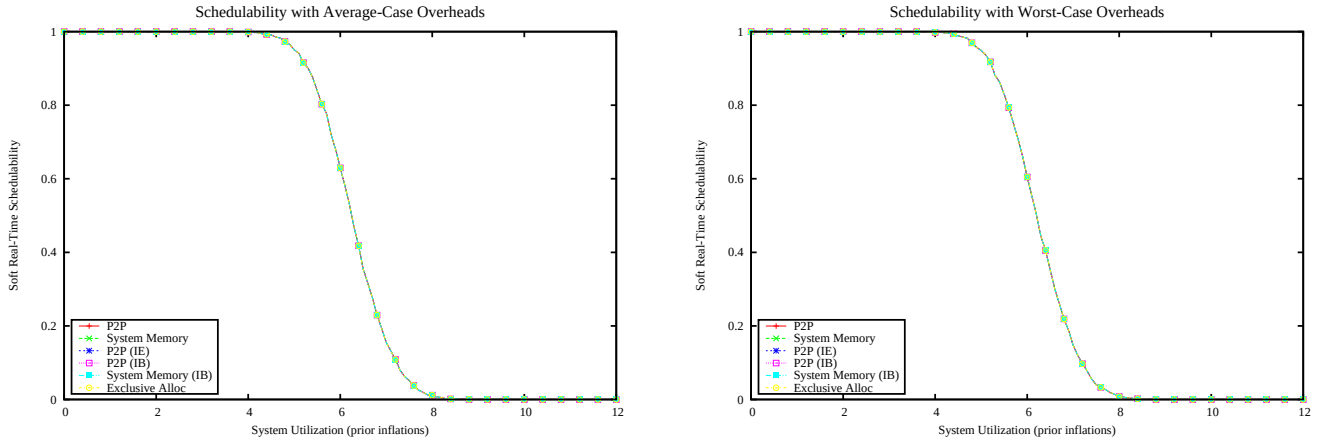

Figure 6513: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

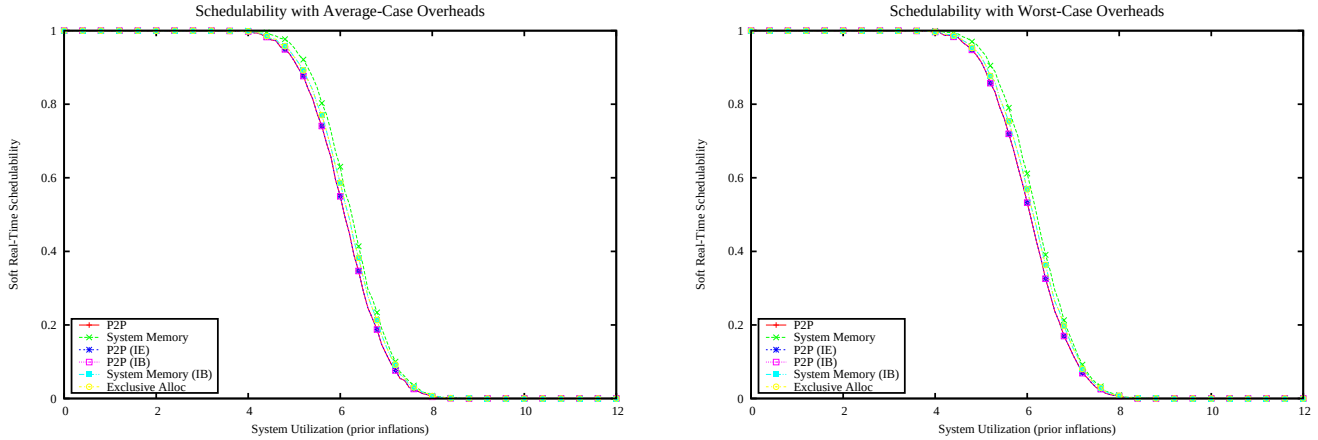

Figure 6514: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

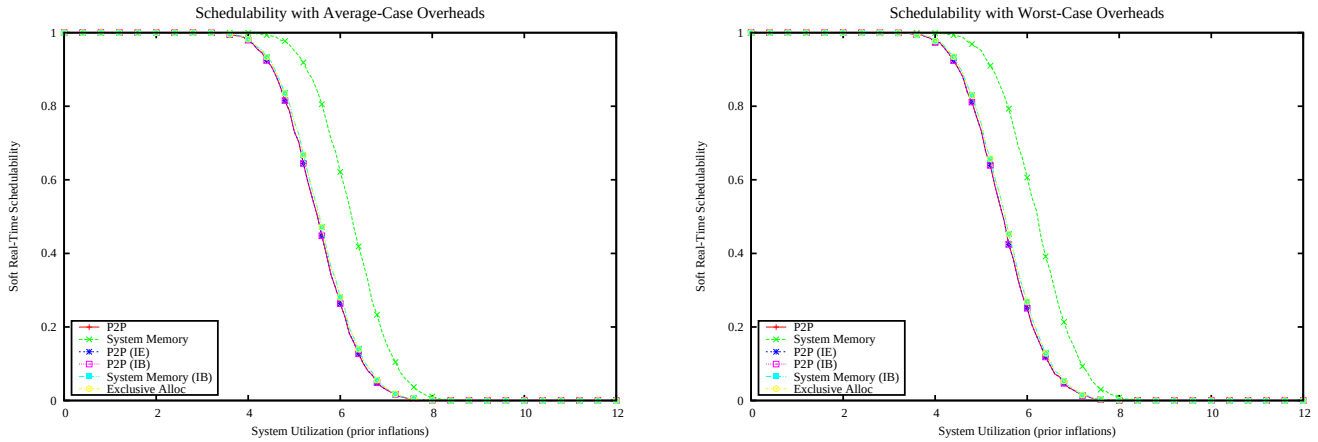

Figure 6515: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

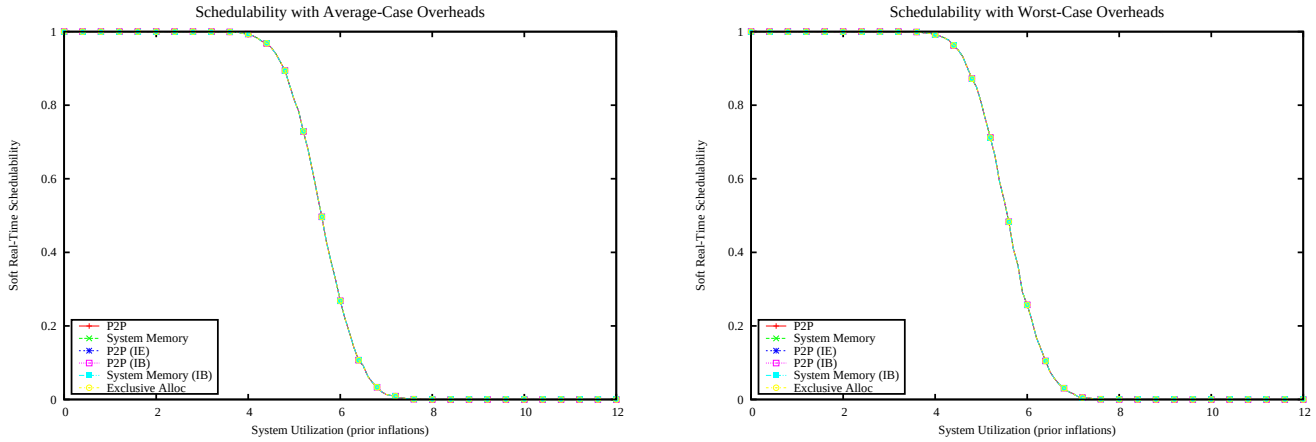

Figure 6516: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

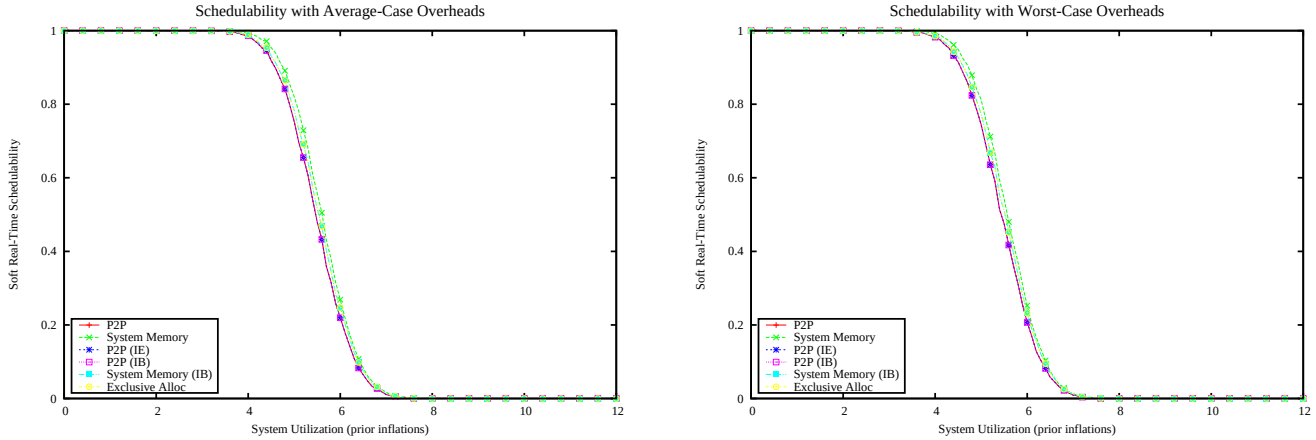

Figure 6517: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

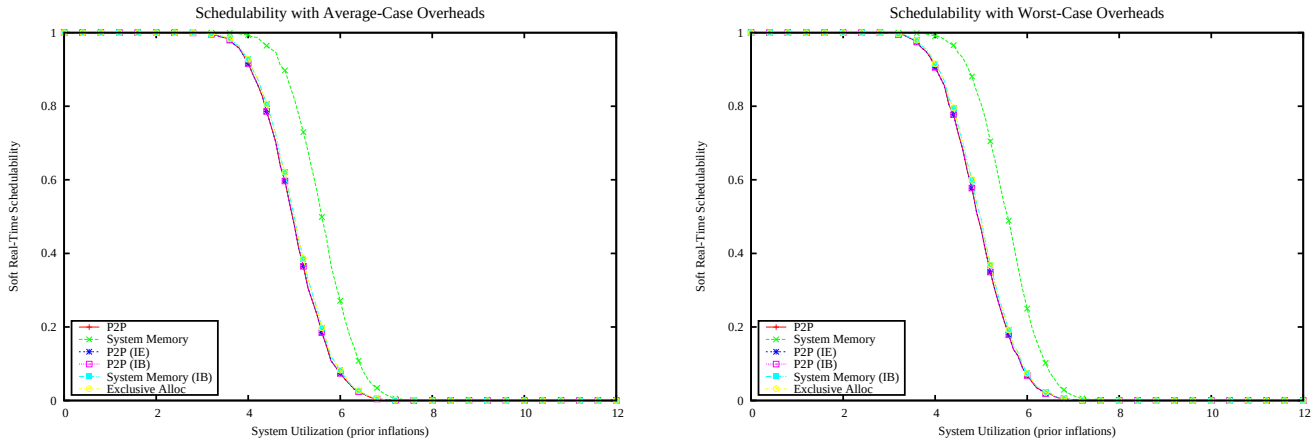

Figure 6518: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

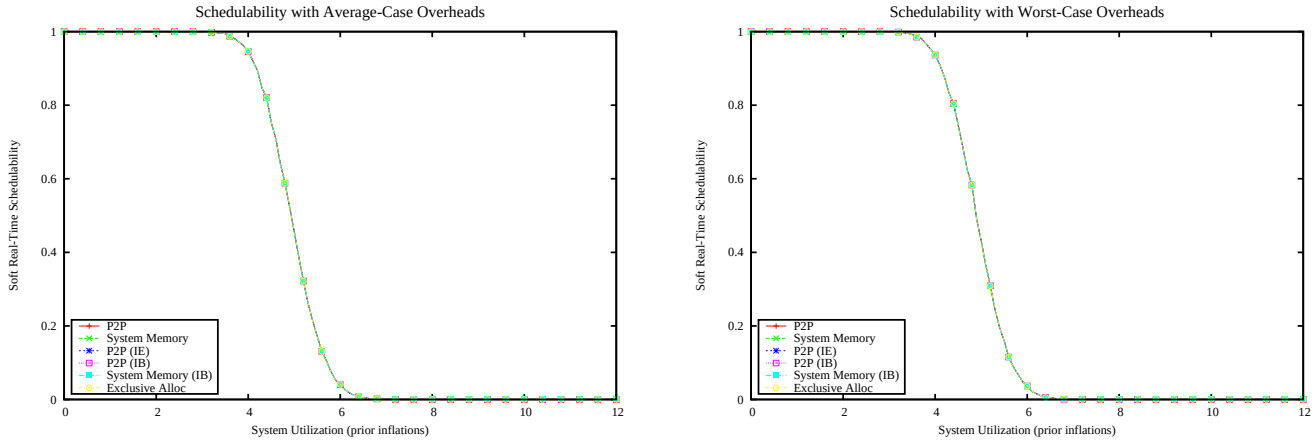

Figure 6519: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

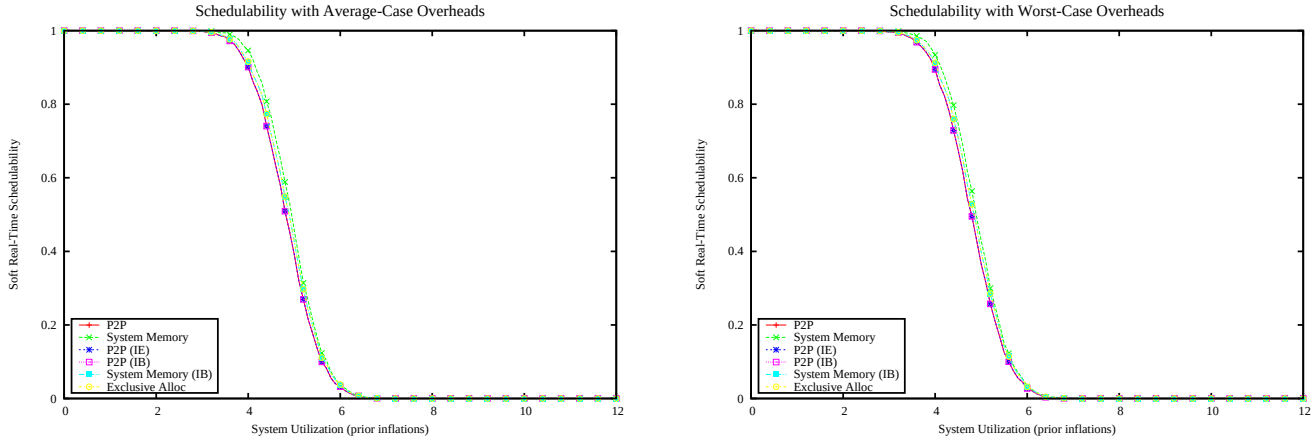

Figure 6520: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

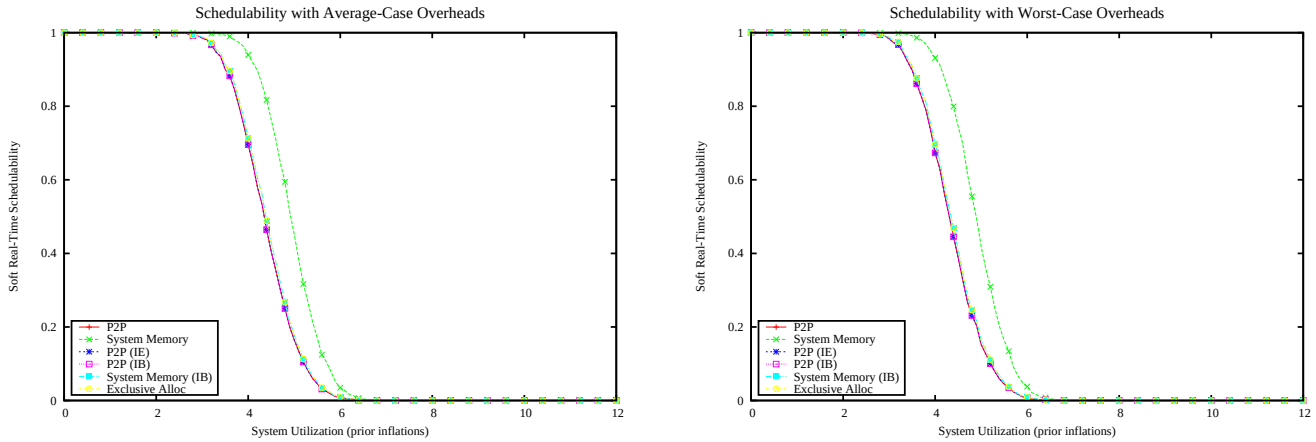

Figure 6521: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

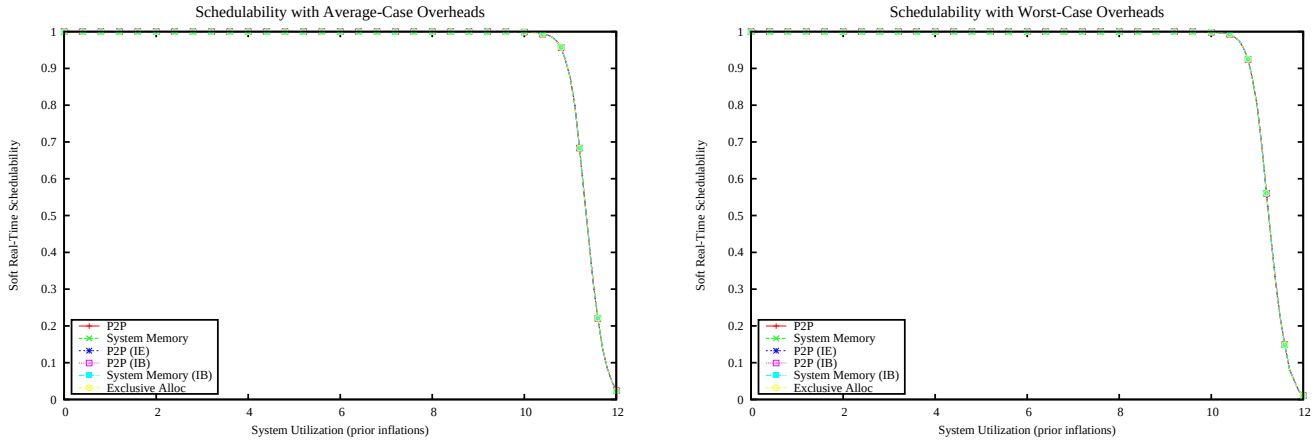

Figure 6522: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

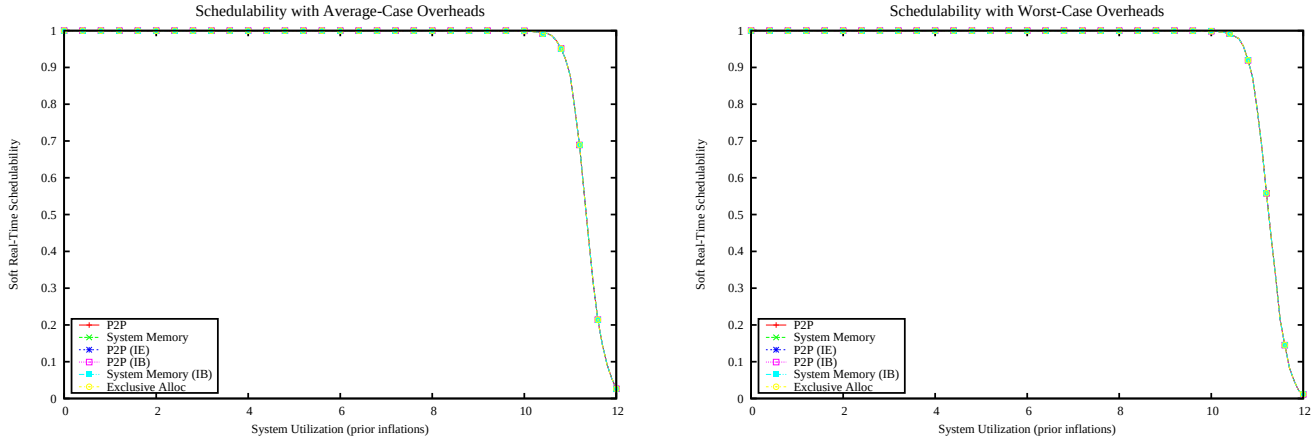

Figure 6523: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

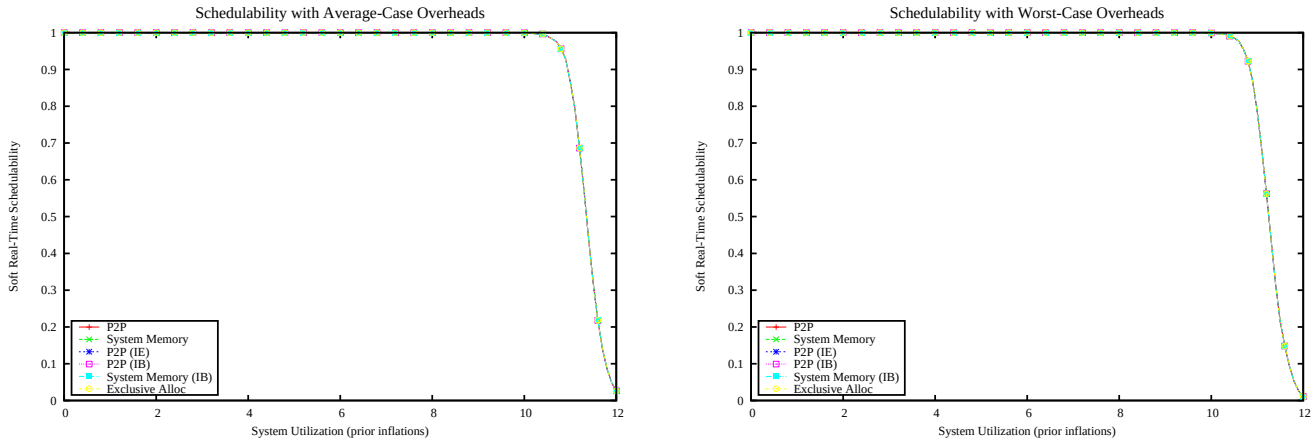

Figure 6524: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

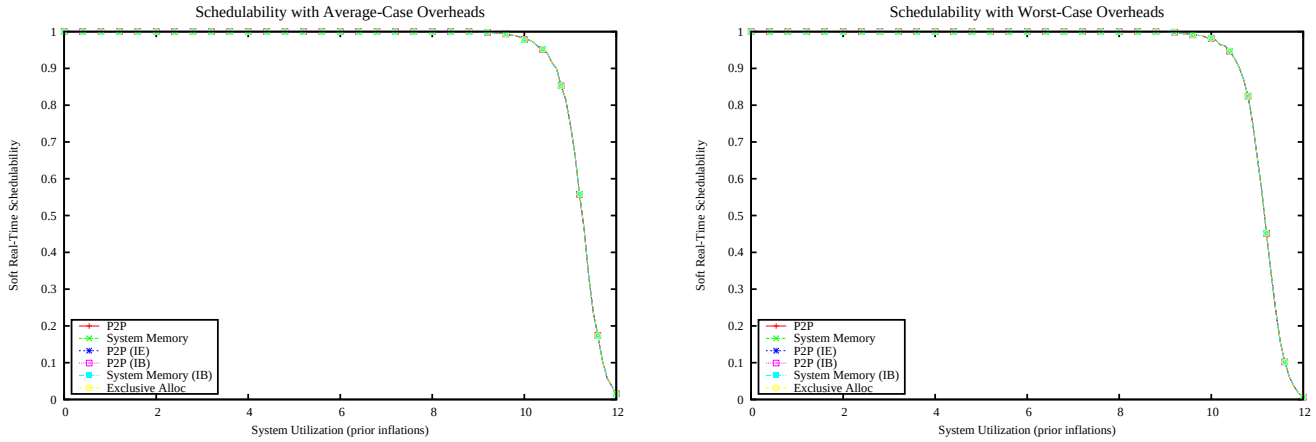

Figure 6525: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

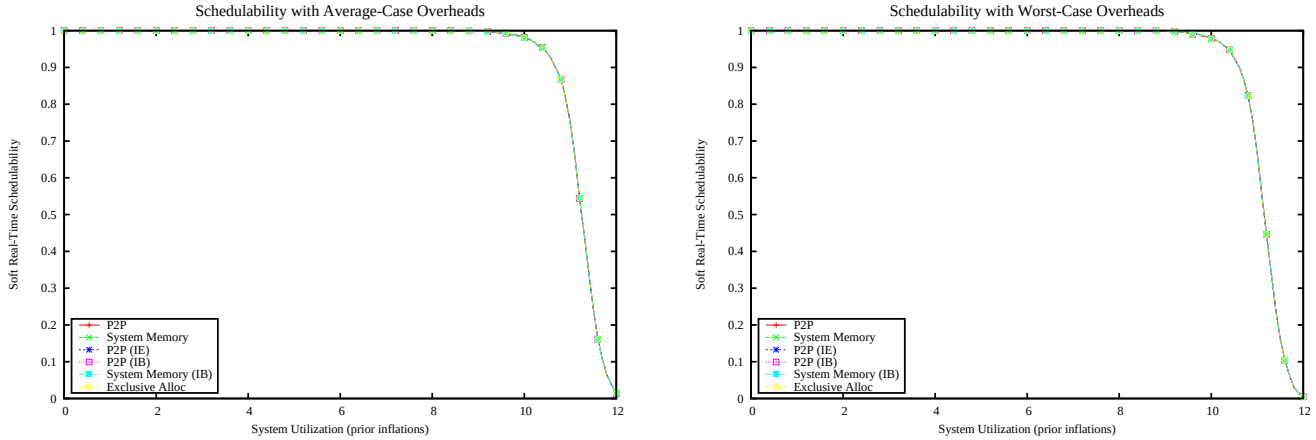

Figure 6526: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

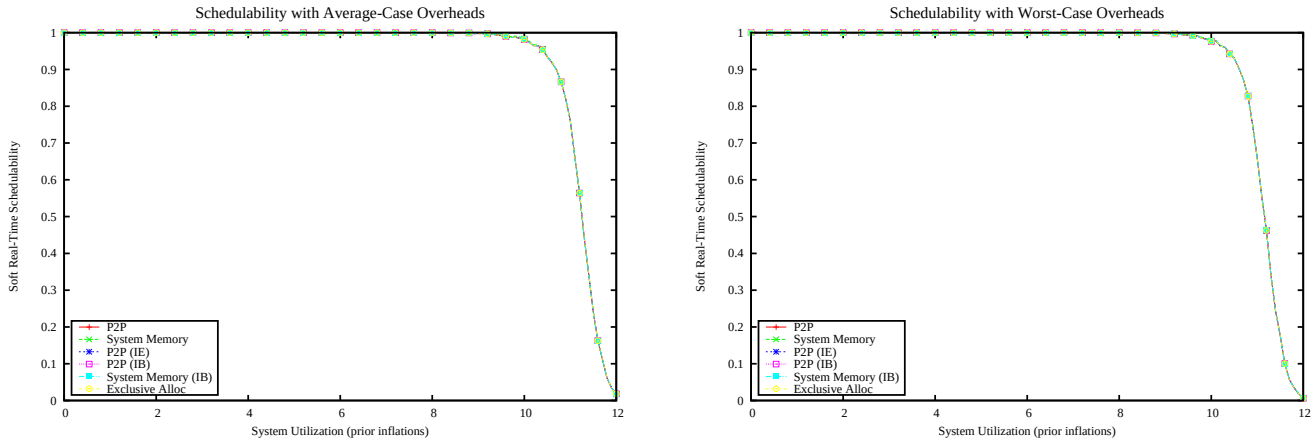

Figure 6527: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

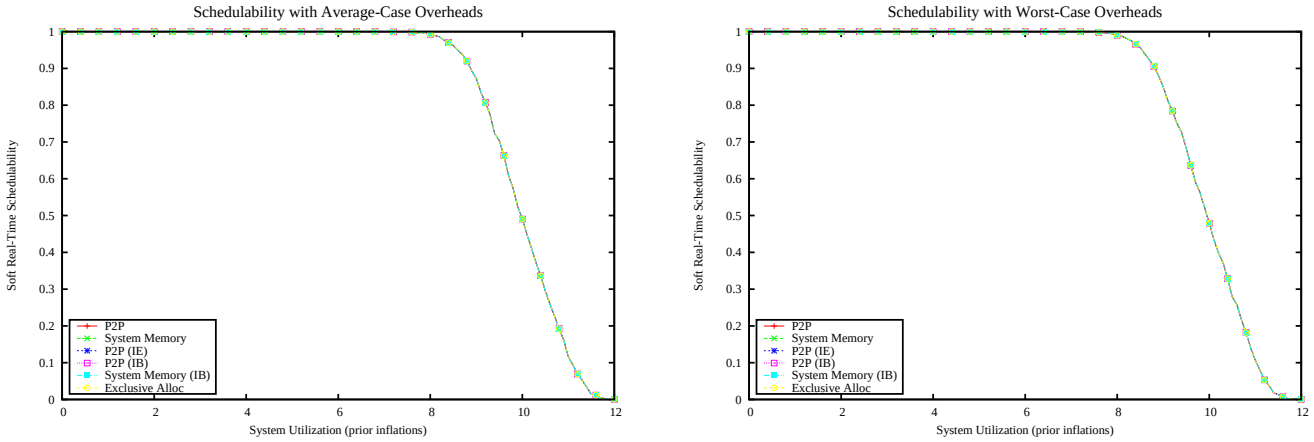

Figure 6528: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

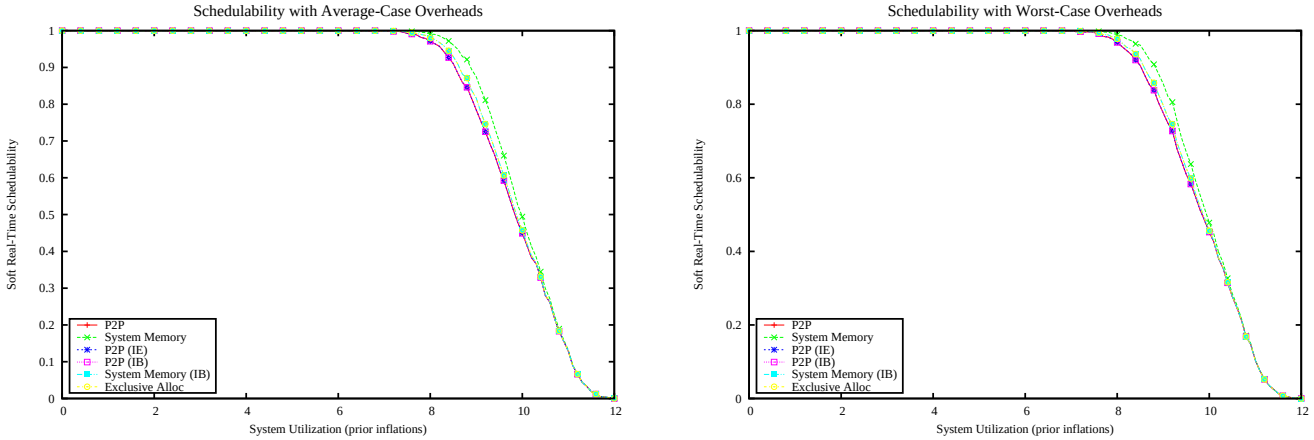

Figure 6529: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

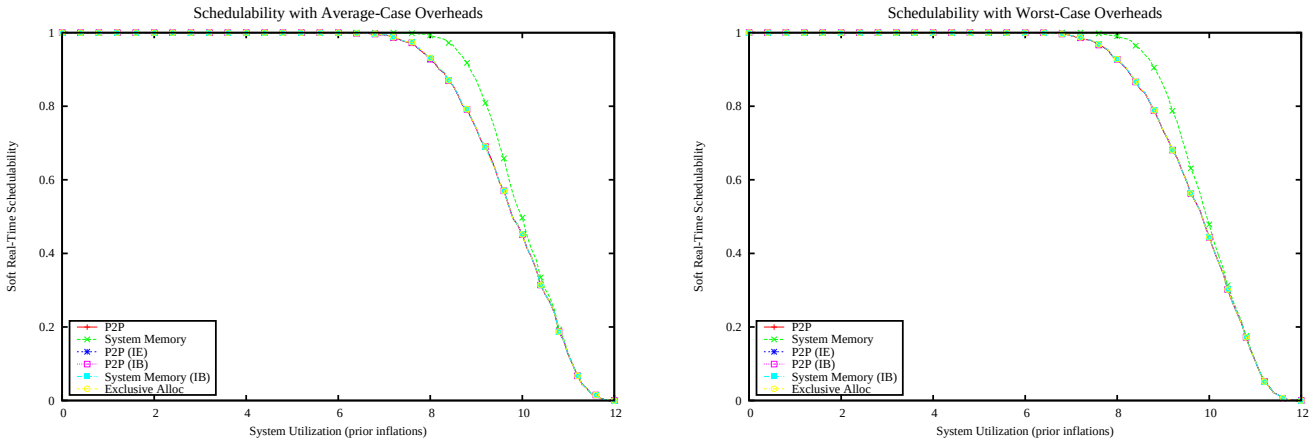

Figure 6530: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

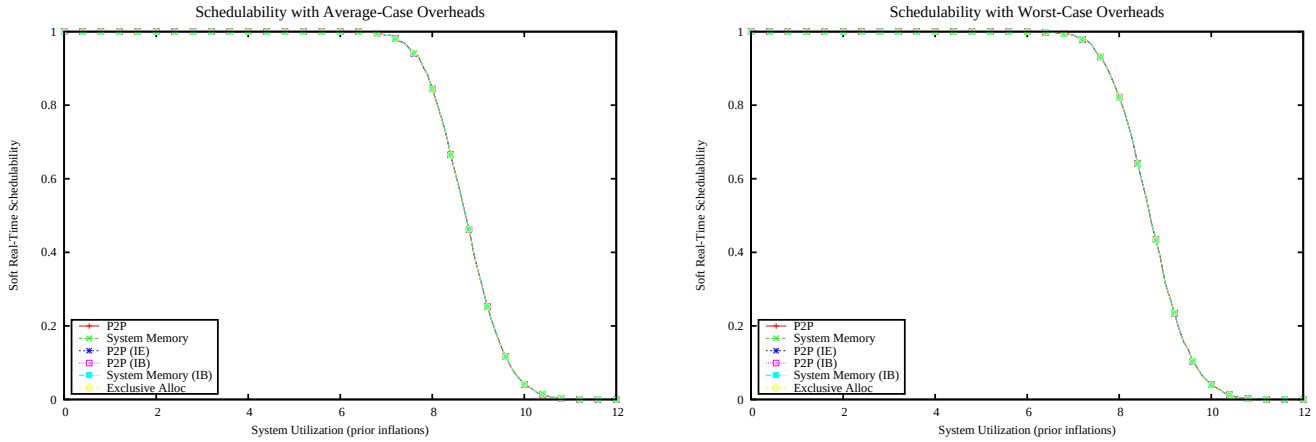

Figure 6531: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

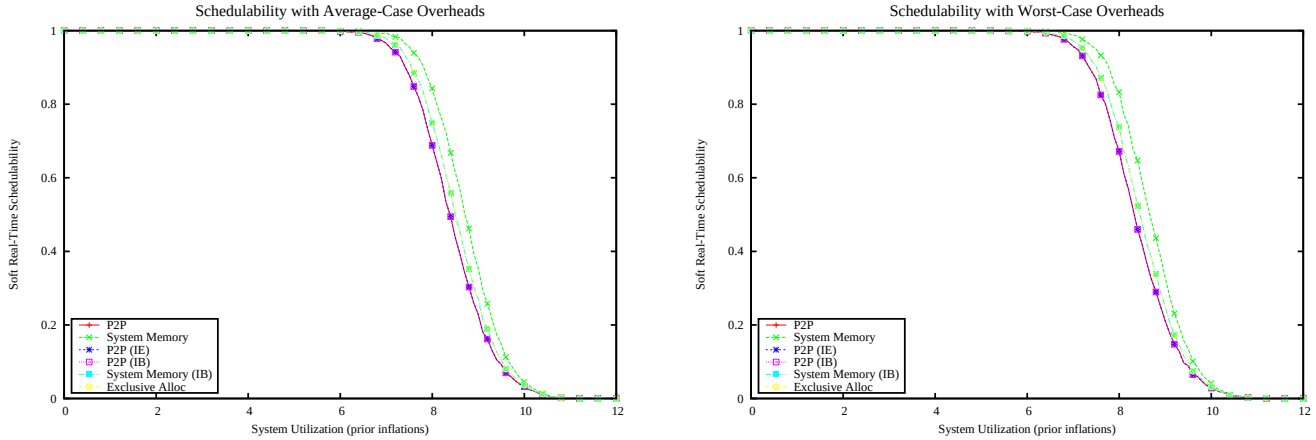

Figure 6532: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

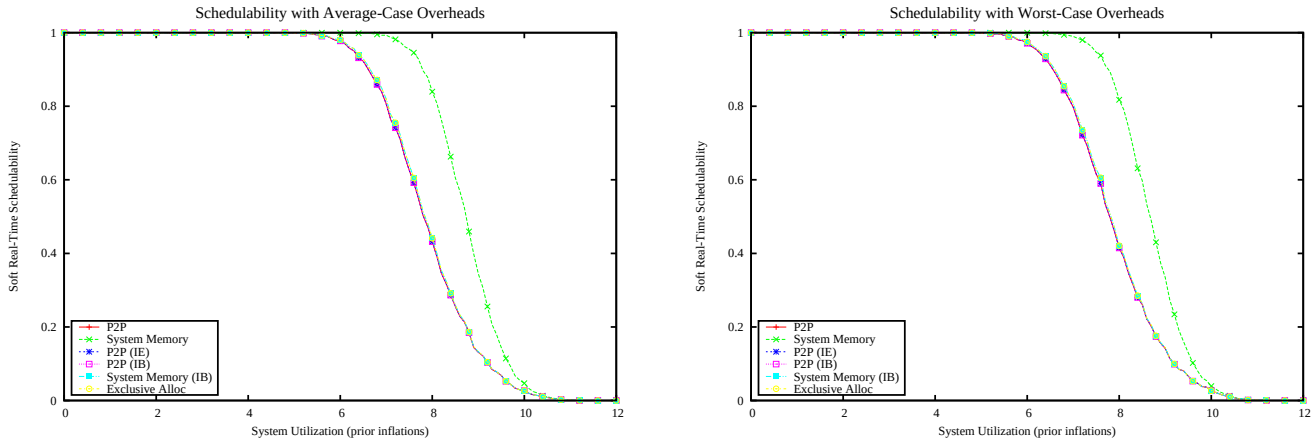

Figure 6533: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

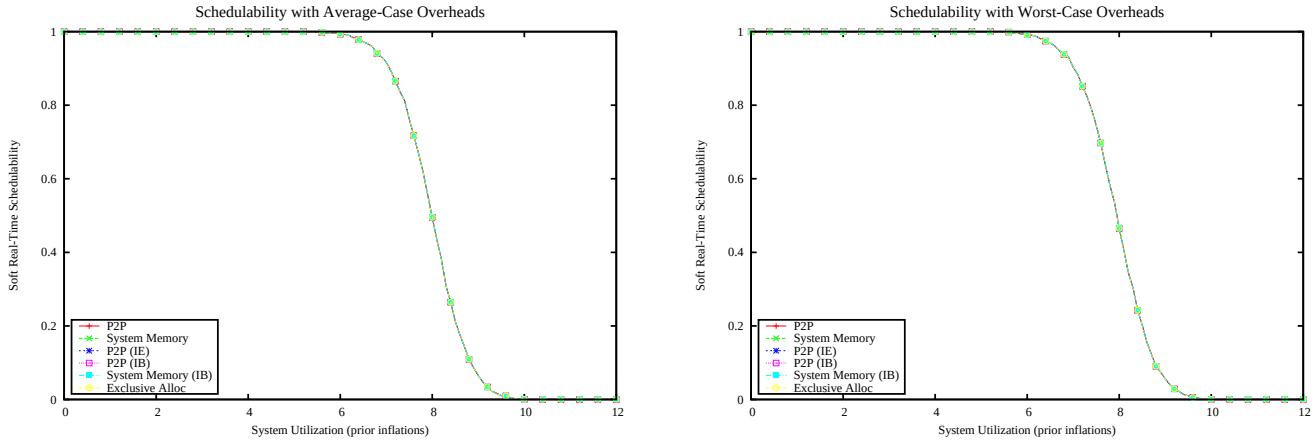

Figure 6534: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

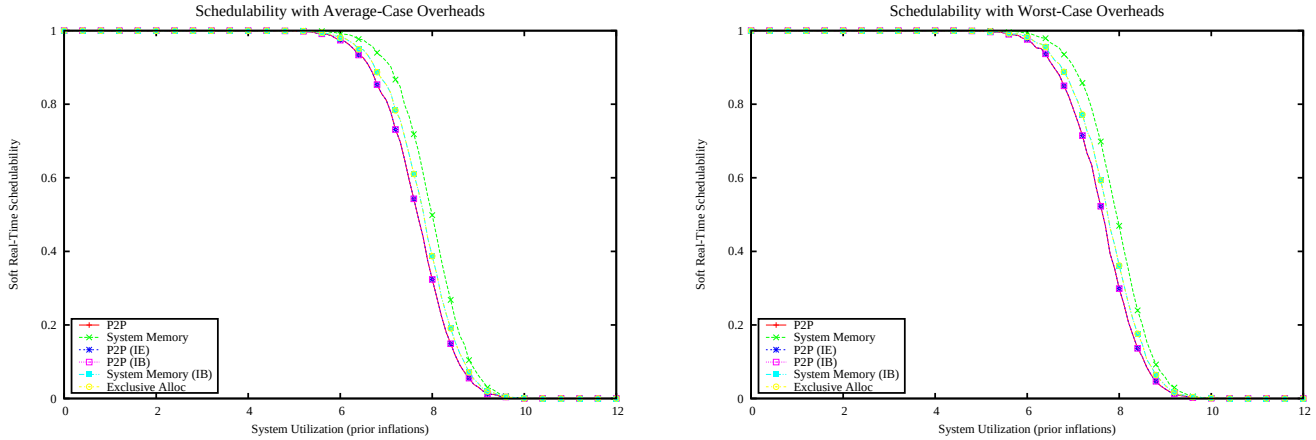

Figure 6535: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

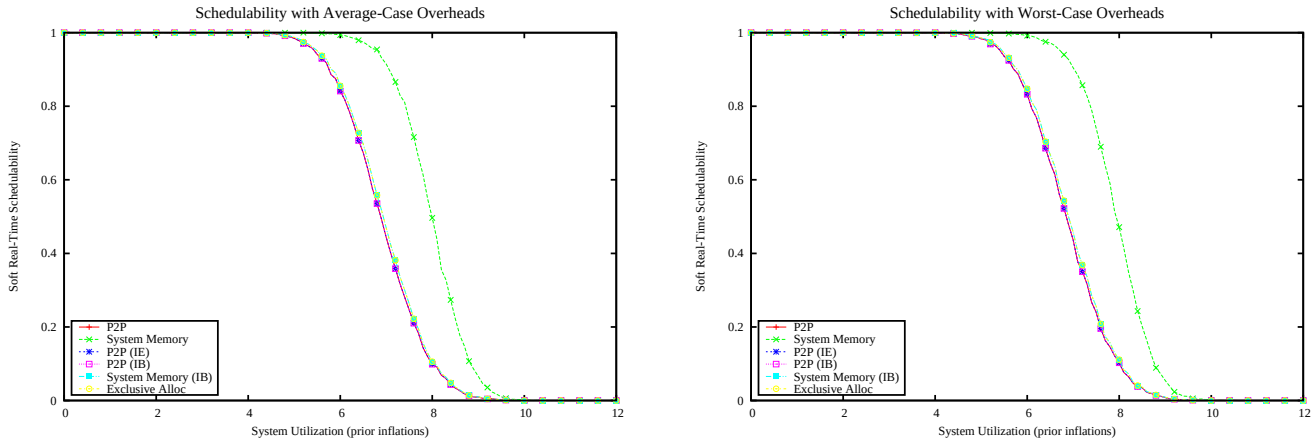

Figure 6536: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

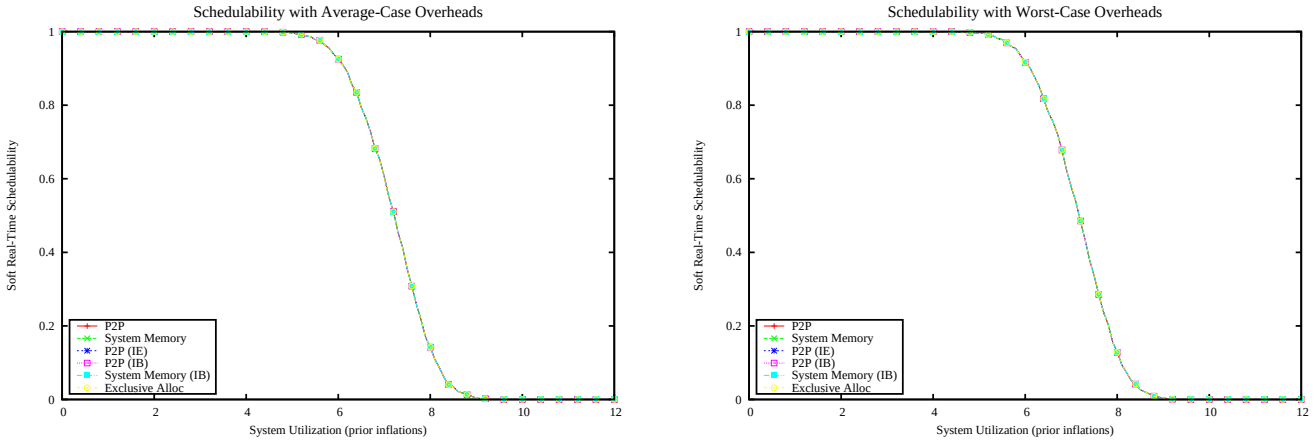

Figure 6537: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

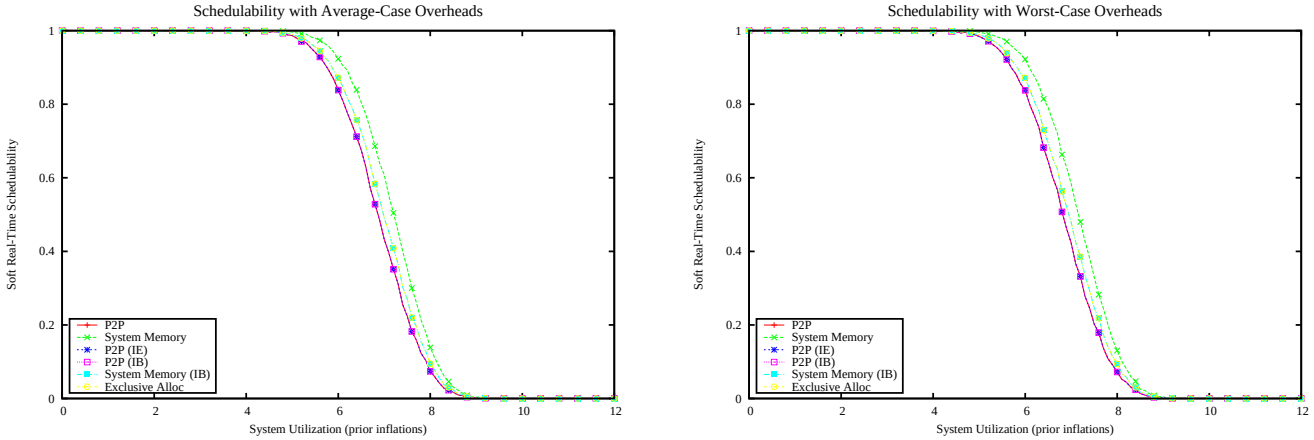

Figure 6538: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

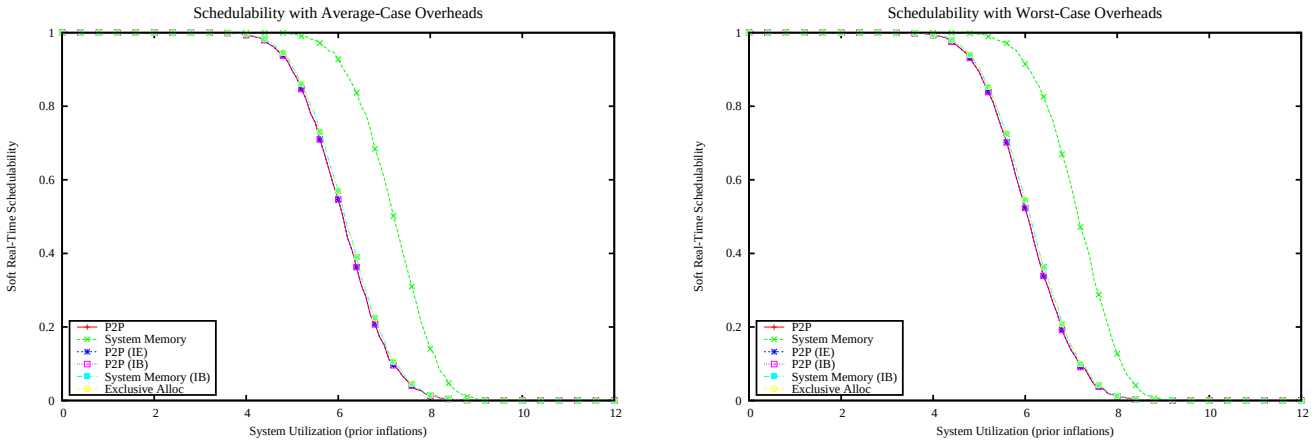

Figure 6539: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

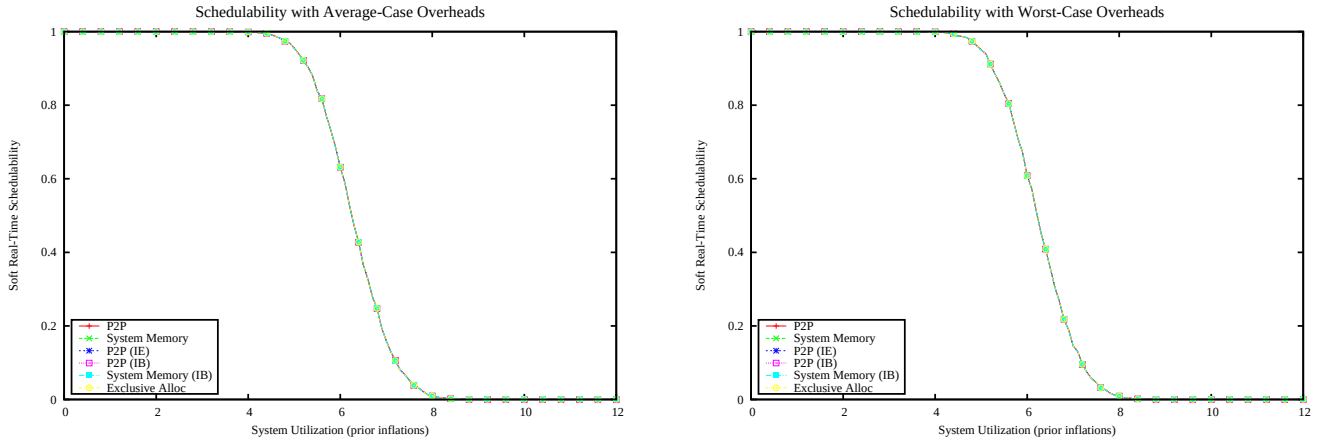

Figure 6540: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

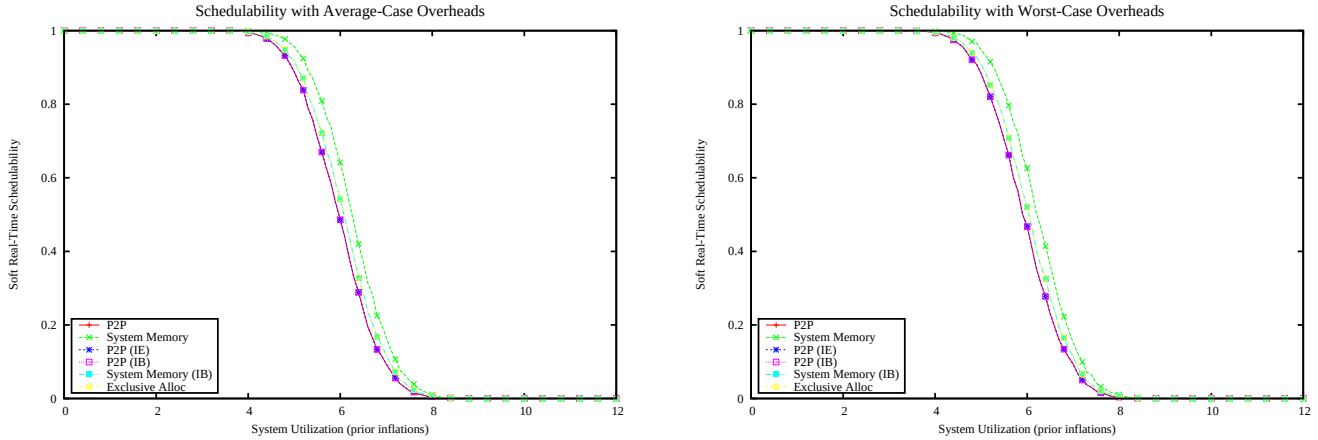

Figure 6541: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

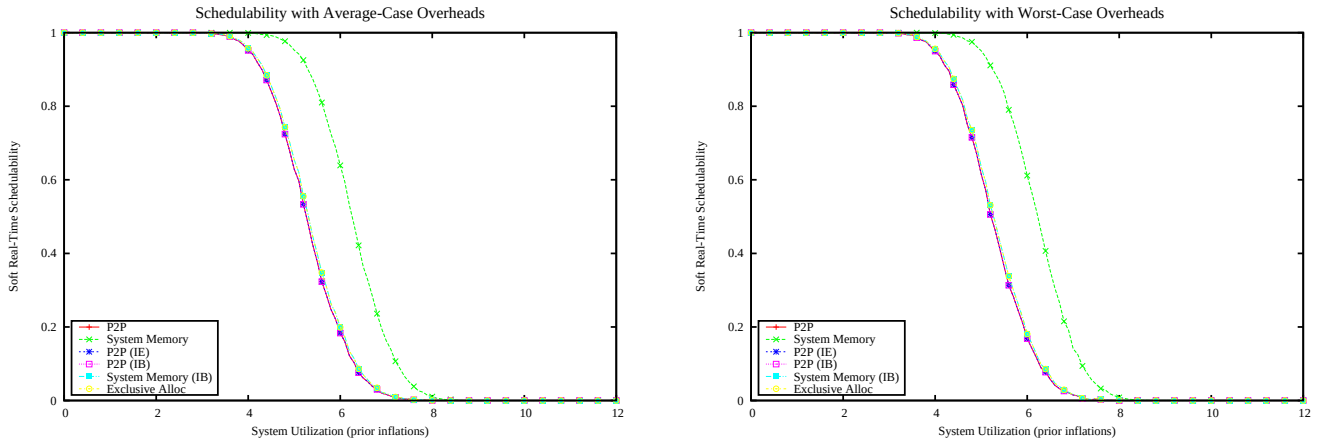

Figure 6542: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

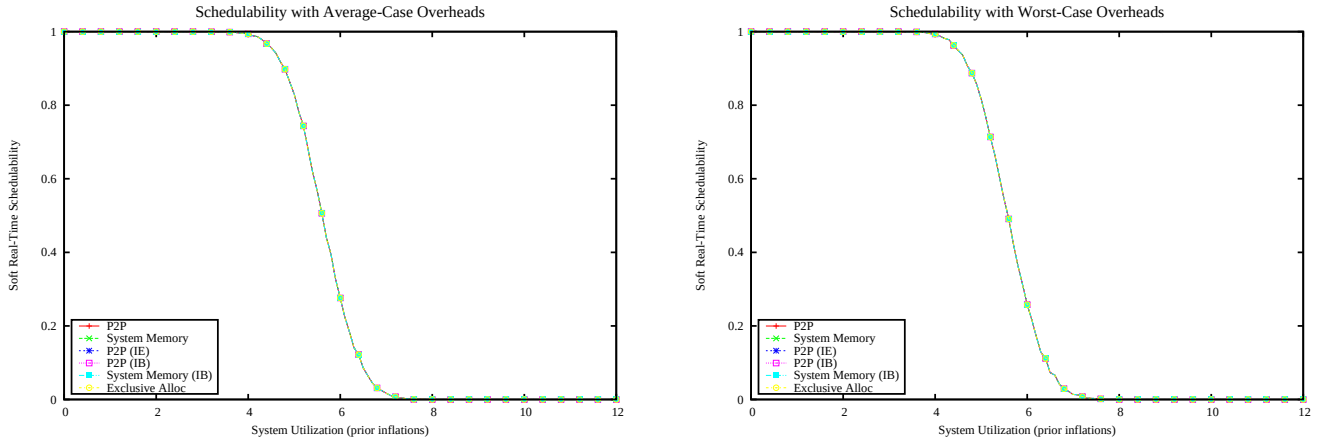

Figure 6543: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

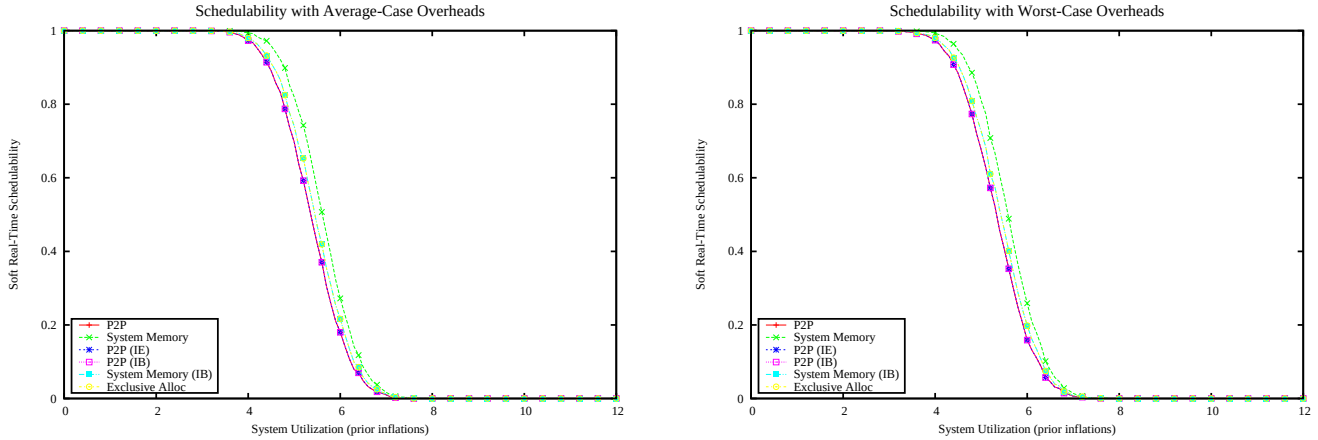

Figure 6544: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

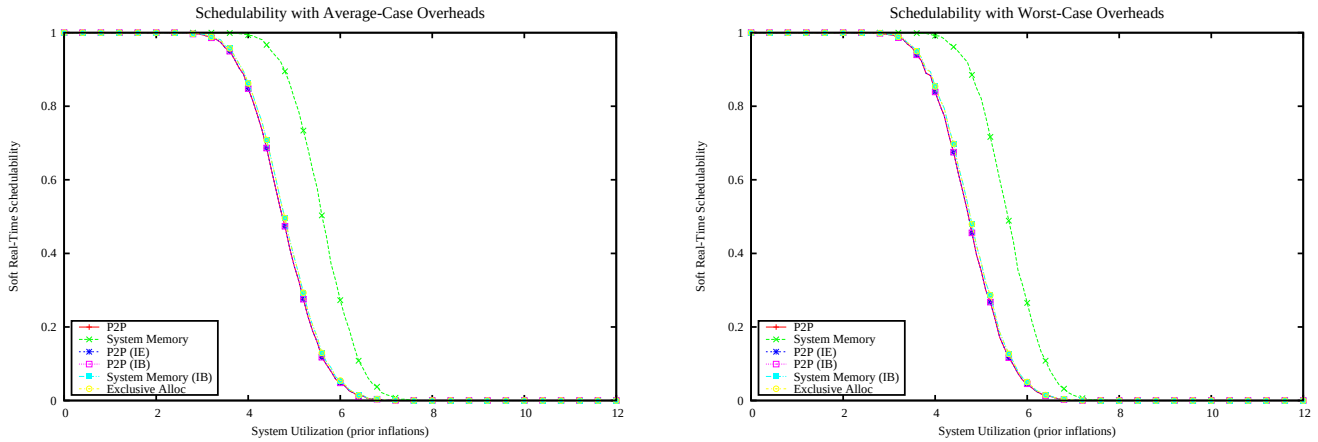

Figure 6545: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

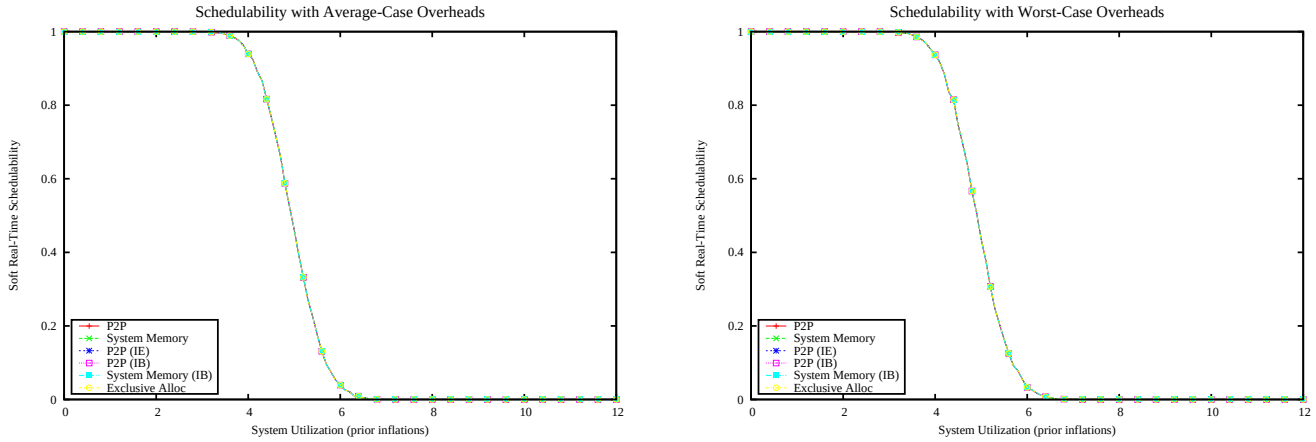

Figure 6546: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

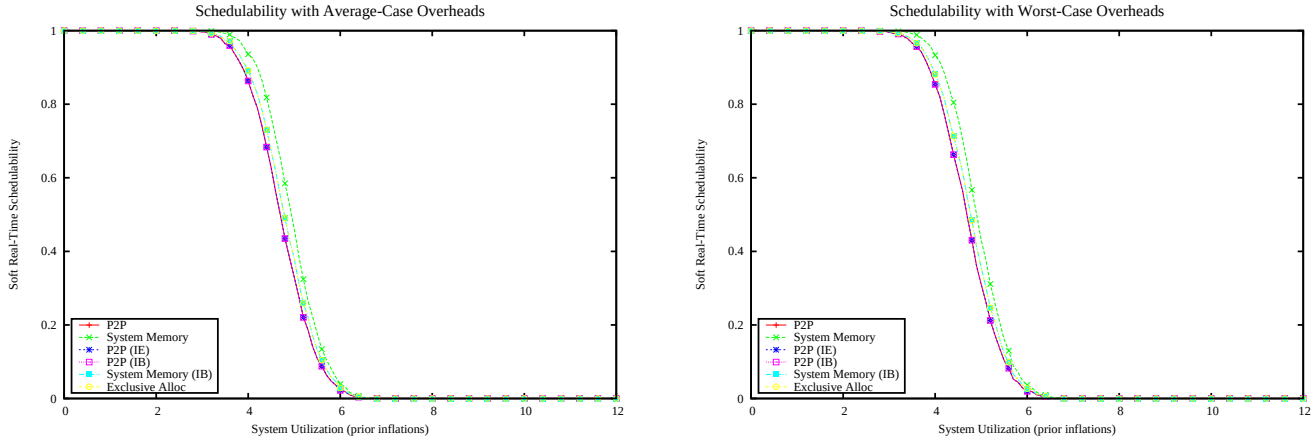

Figure 6547: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

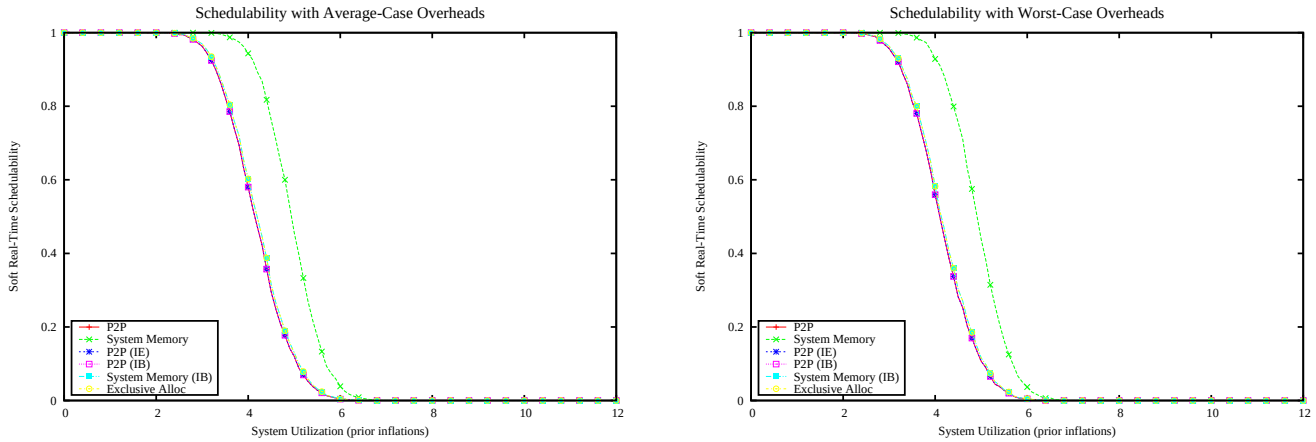

Figure 6548: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

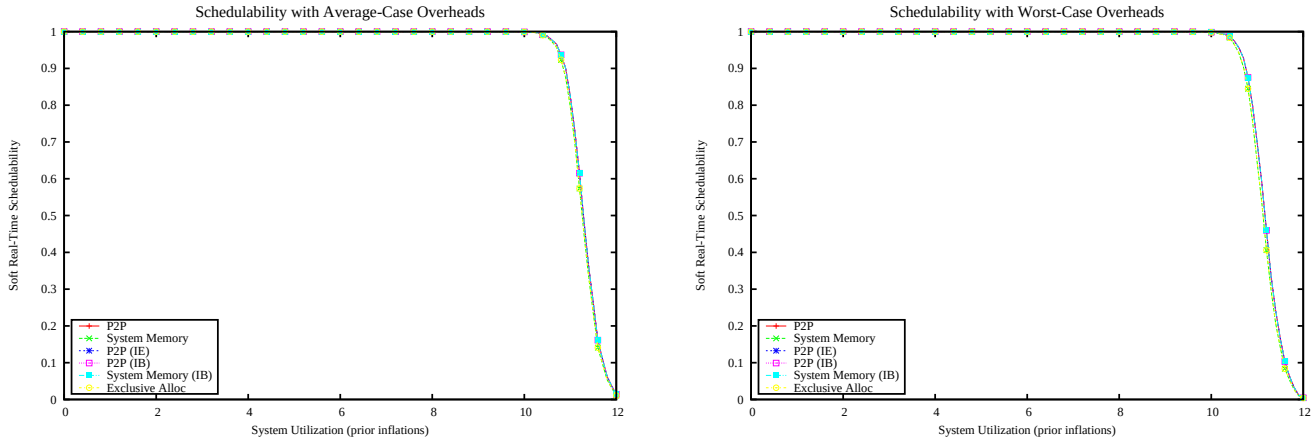

Figure 6549: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

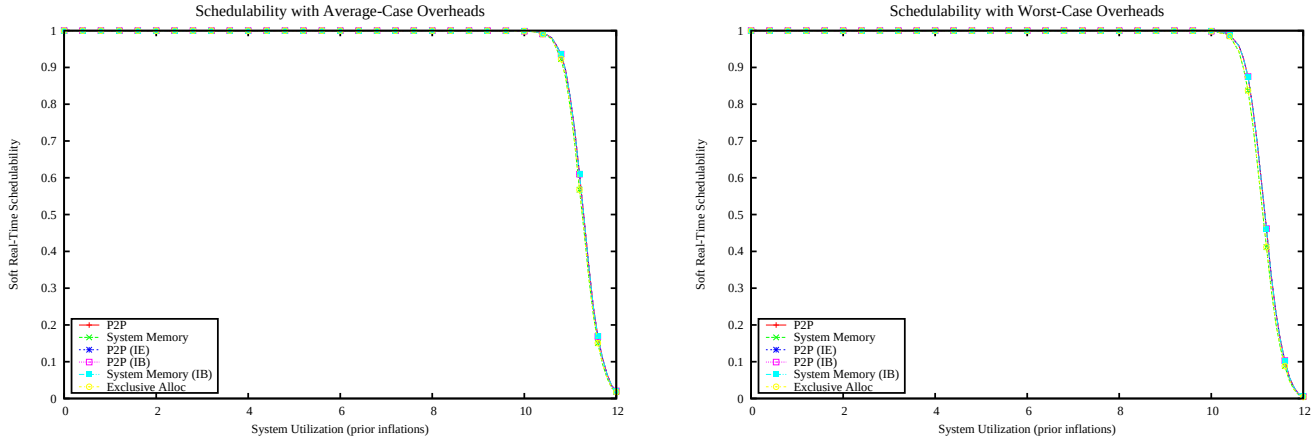

Figure 6550: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

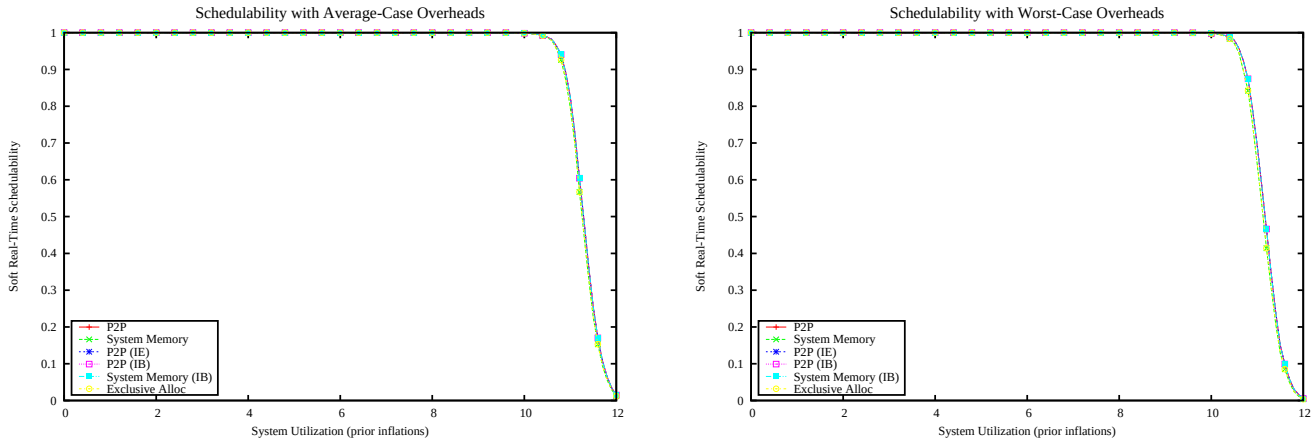

Figure 6551: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

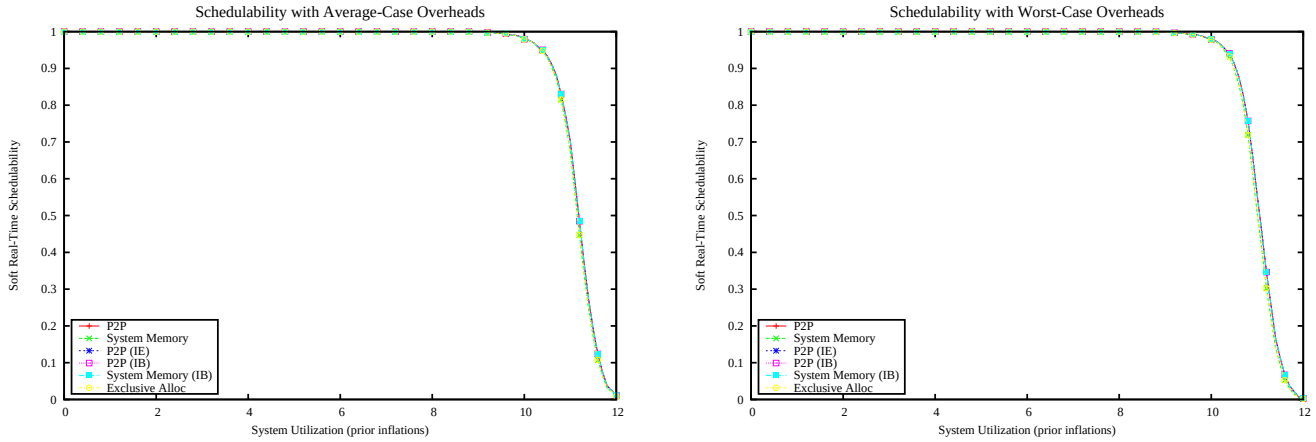

Figure 6552: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

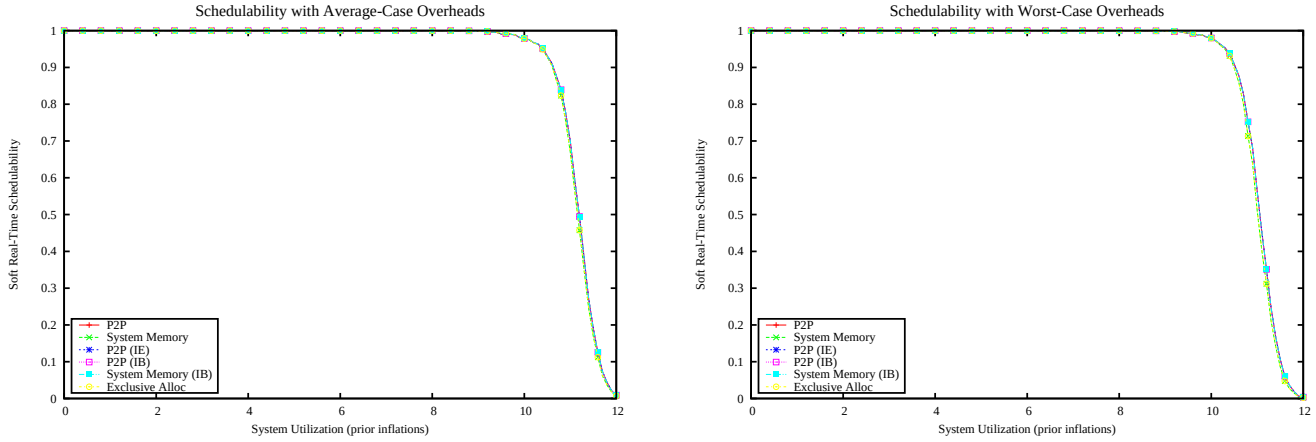

Figure 6553: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

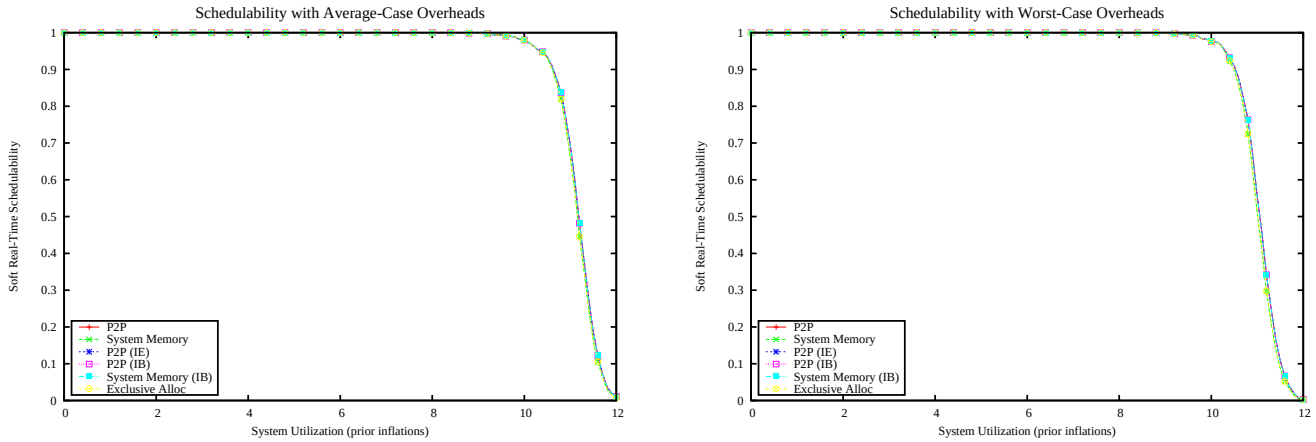

Figure 6554: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

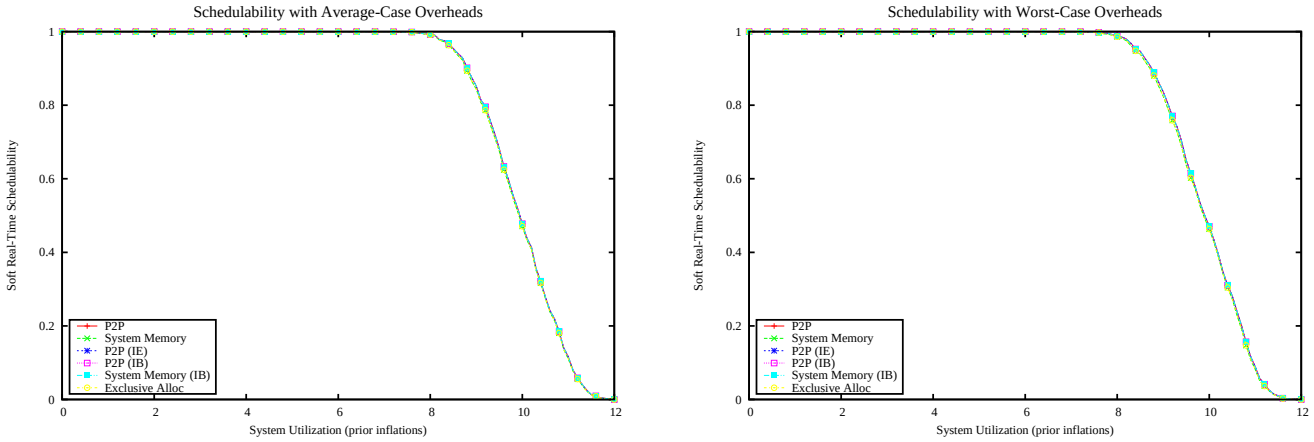

Figure 6555: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

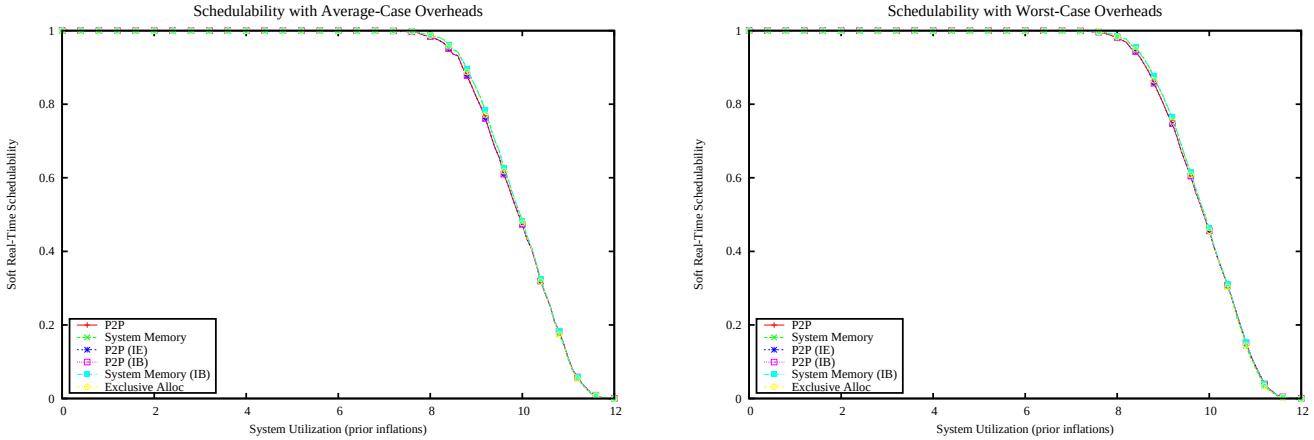

Figure 6556: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

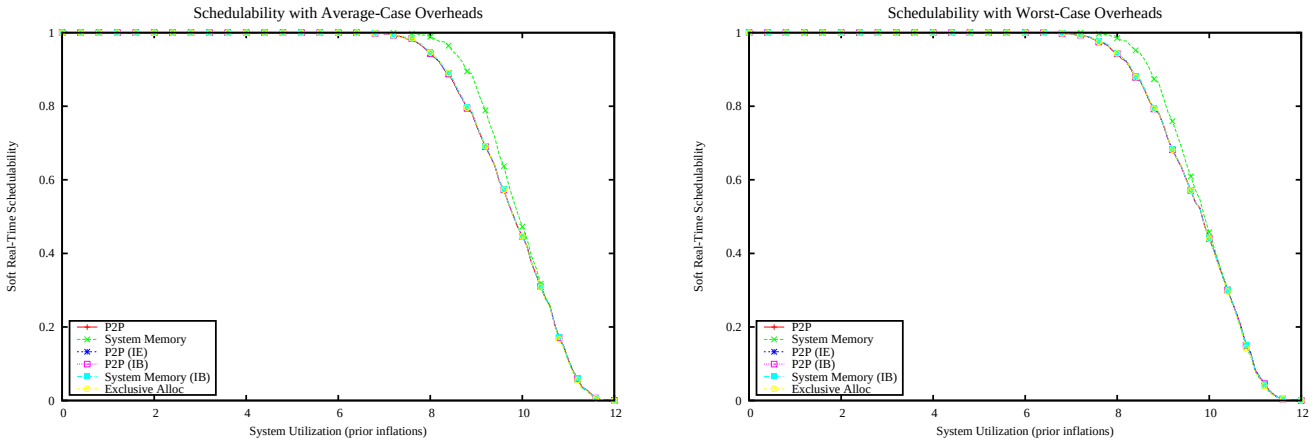

Figure 6557: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

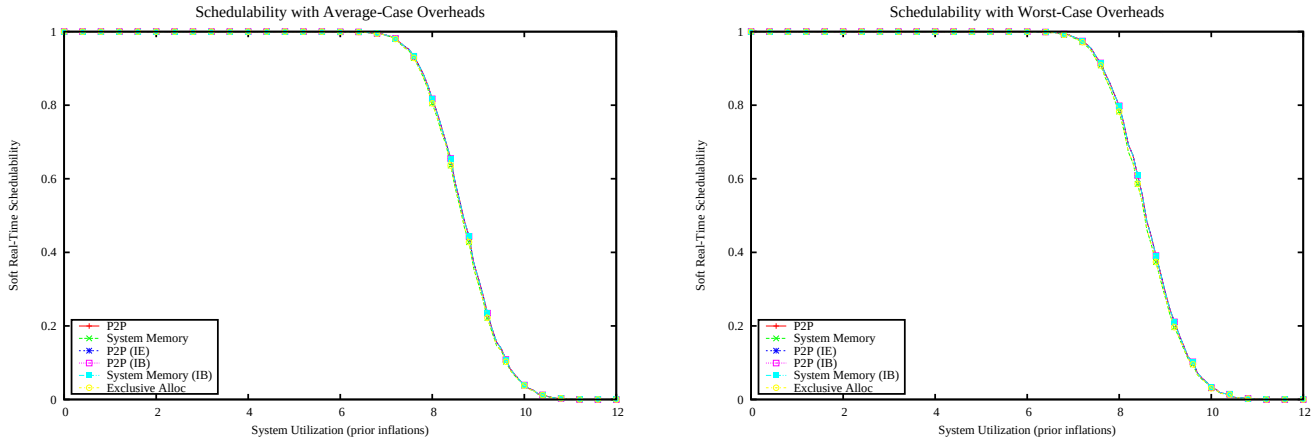

Figure 6558: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

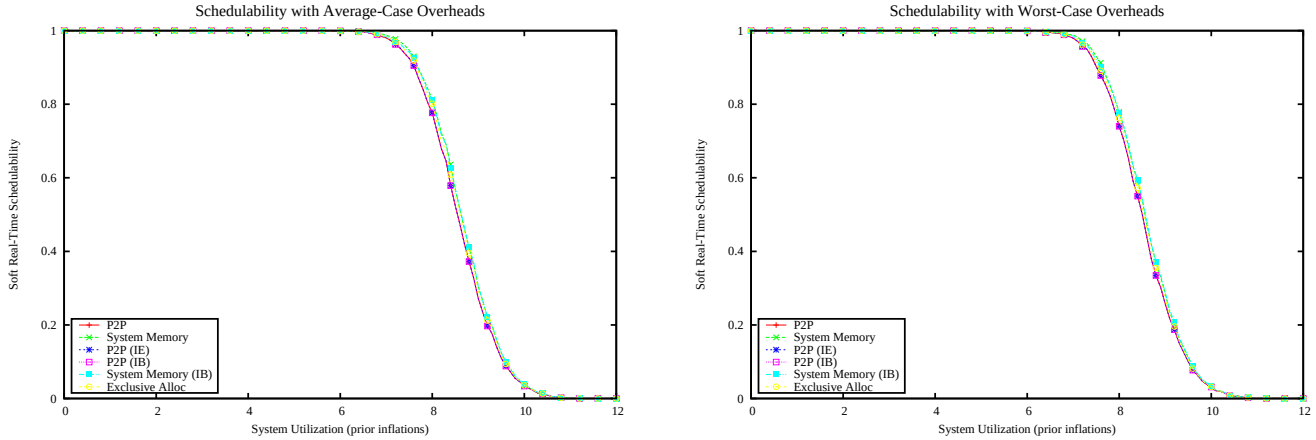

Figure 6559: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

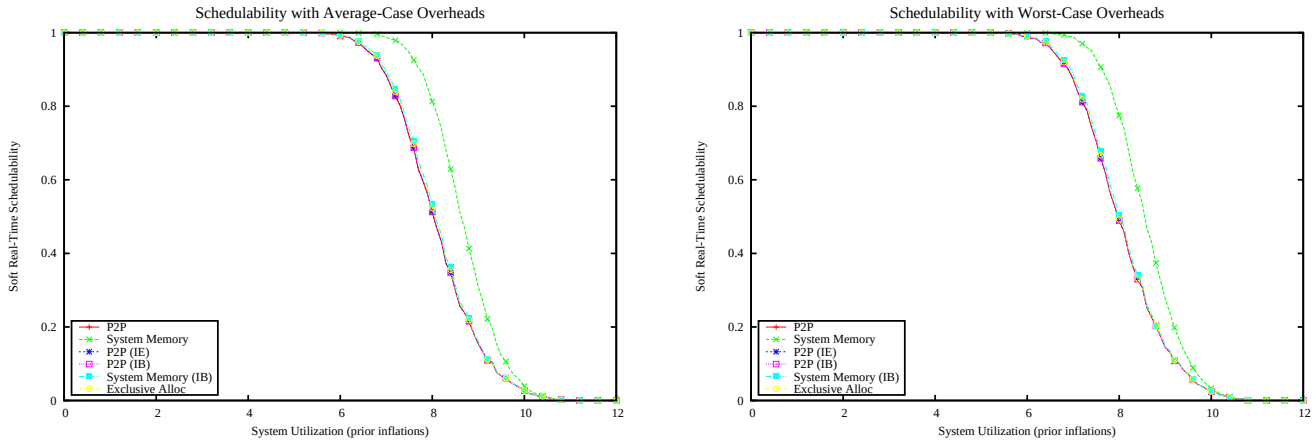

Figure 6560: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

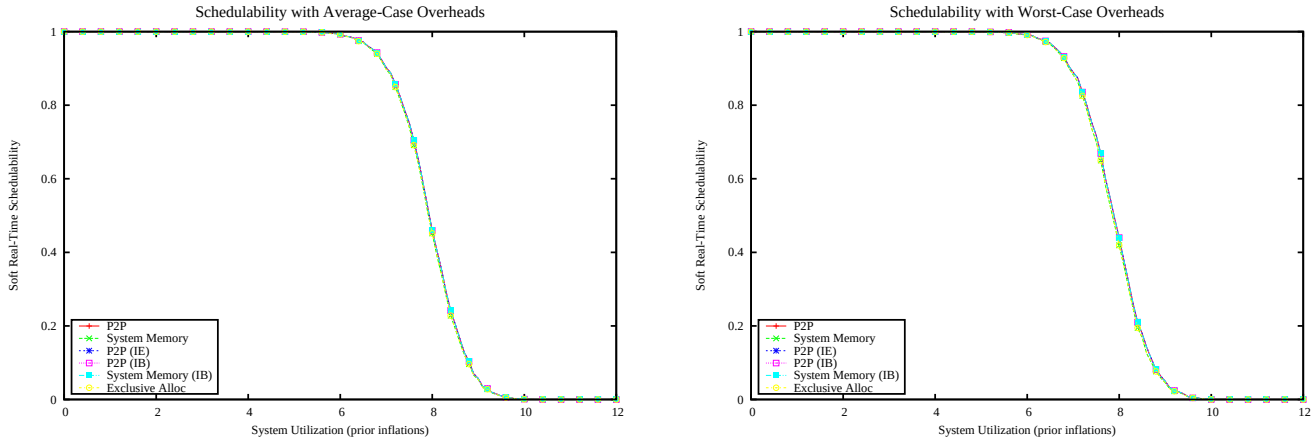

Figure 6561: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

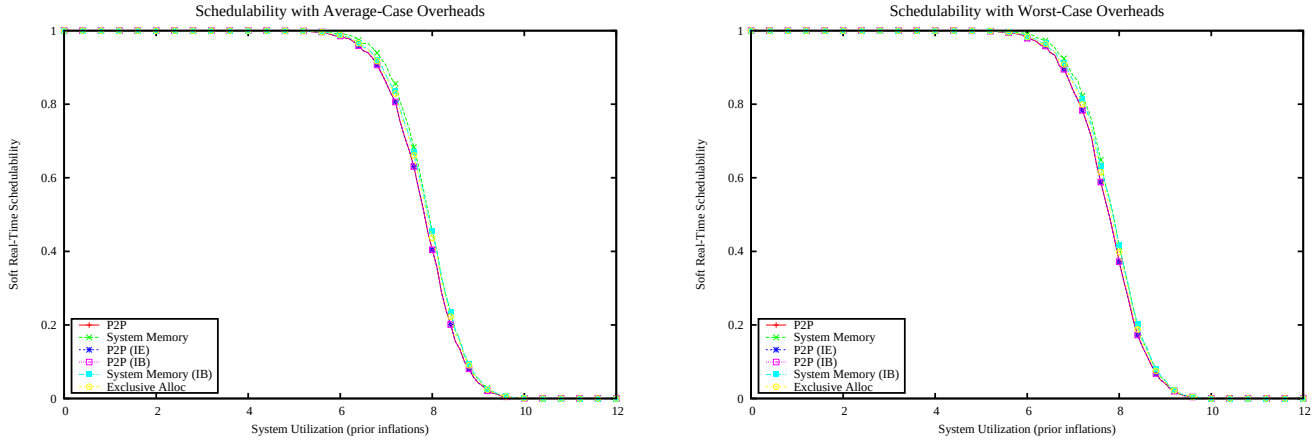

Figure 6562: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

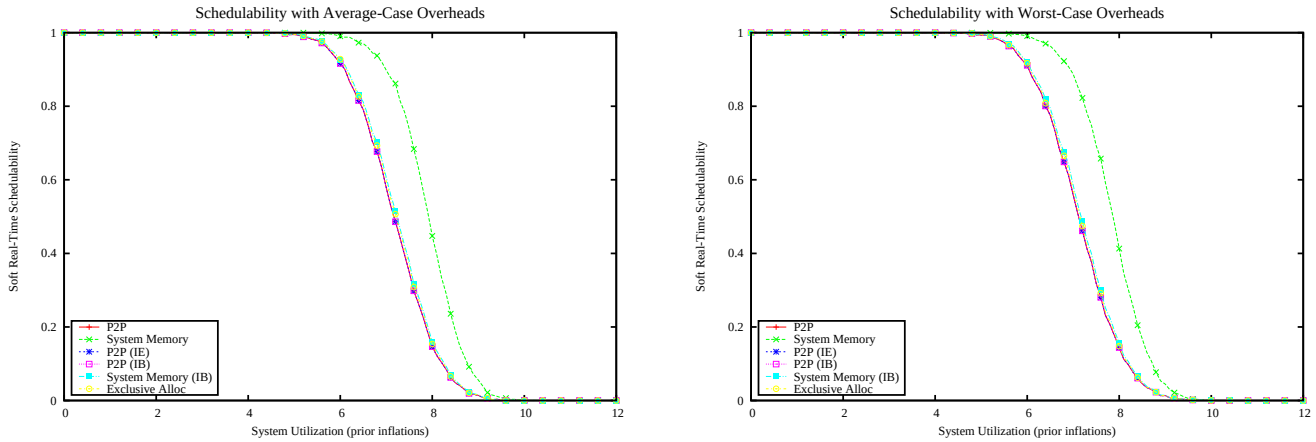

Figure 6563: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

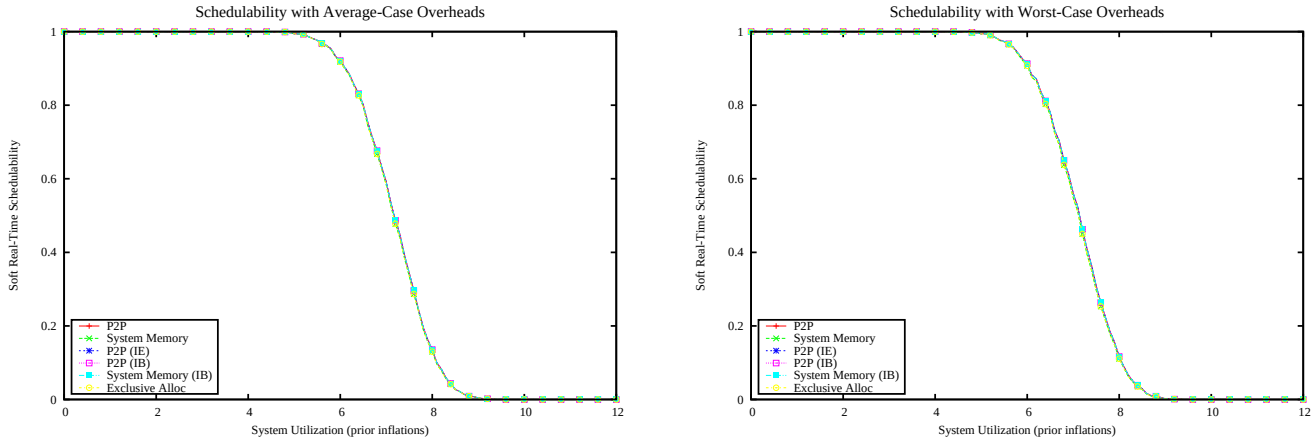

Figure 6564: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

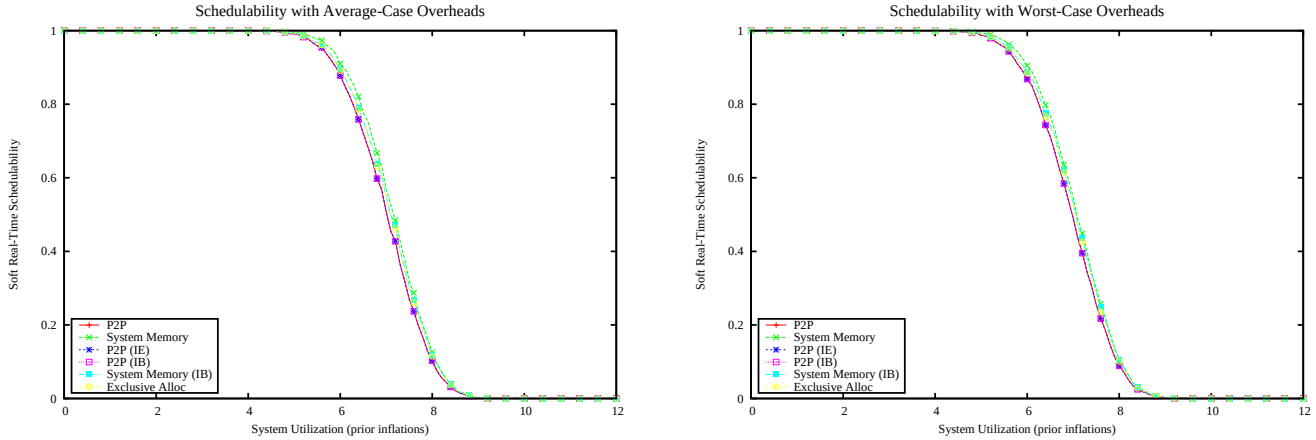

Figure 6565: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

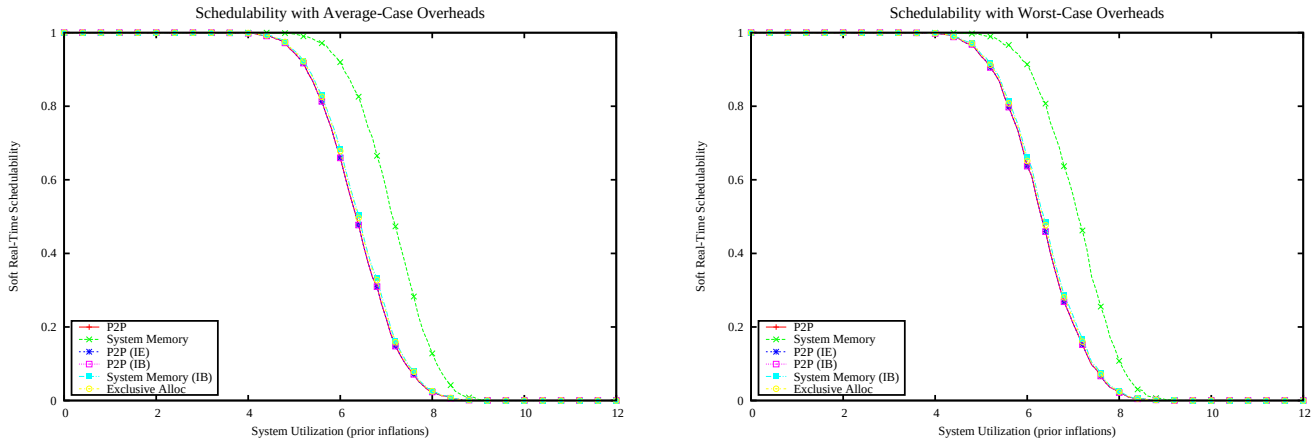

Figure 6566: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

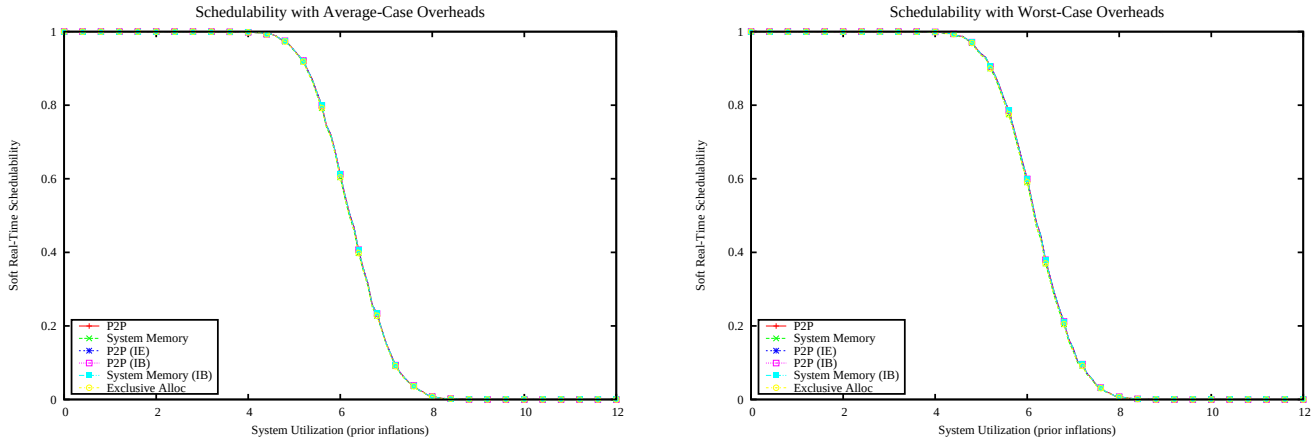

Figure 6567: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

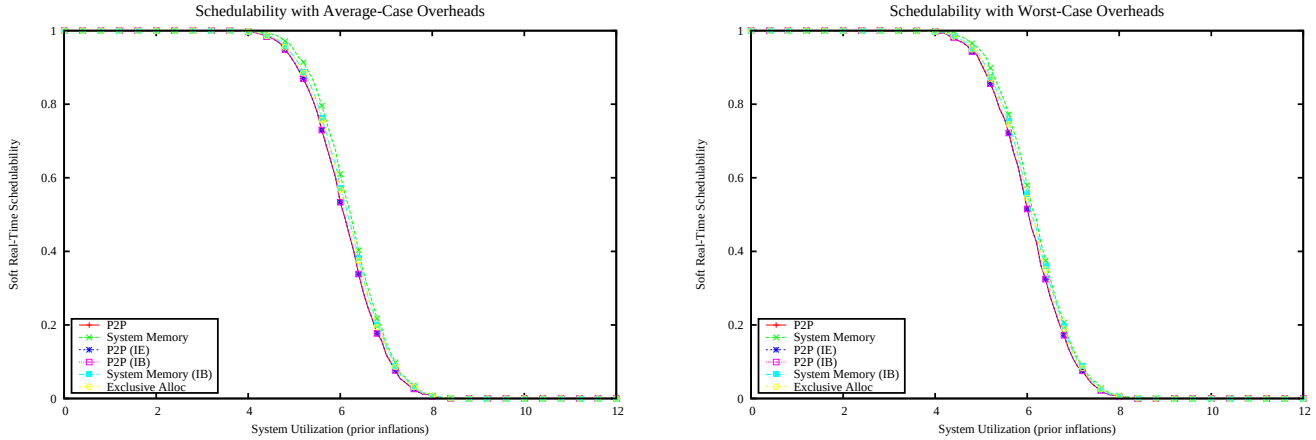

Figure 6568: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

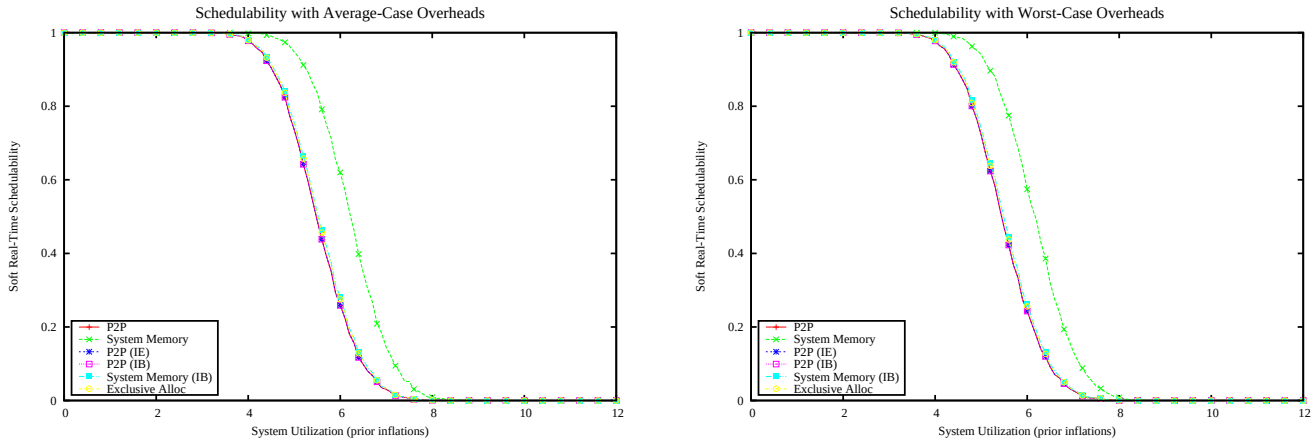

Figure 6569: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

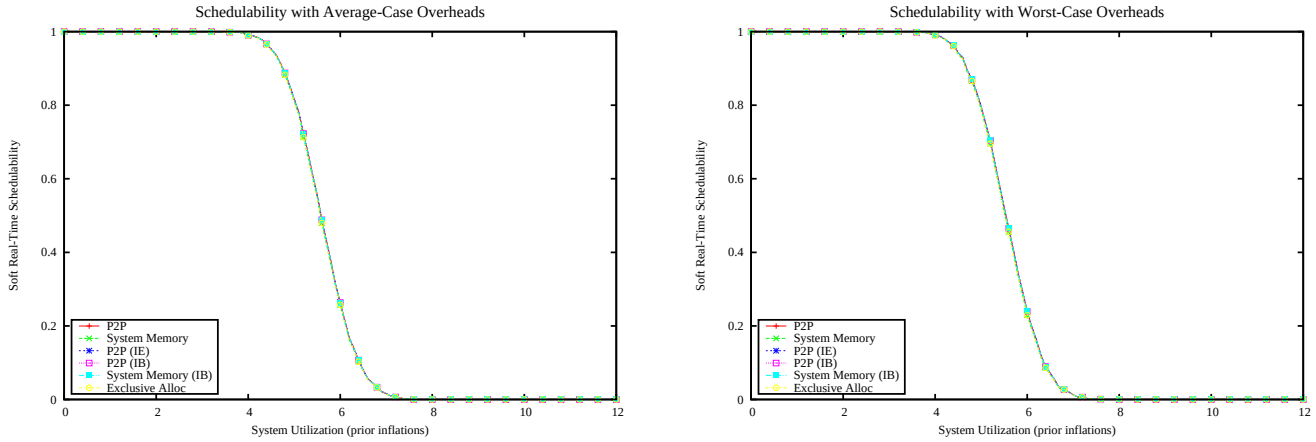

Figure 6570: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

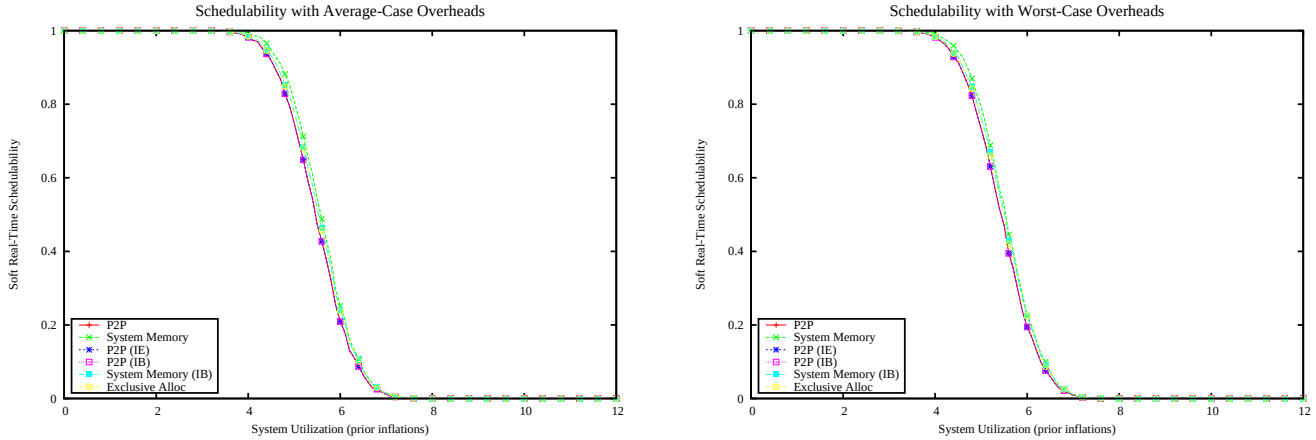

Figure 6571: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

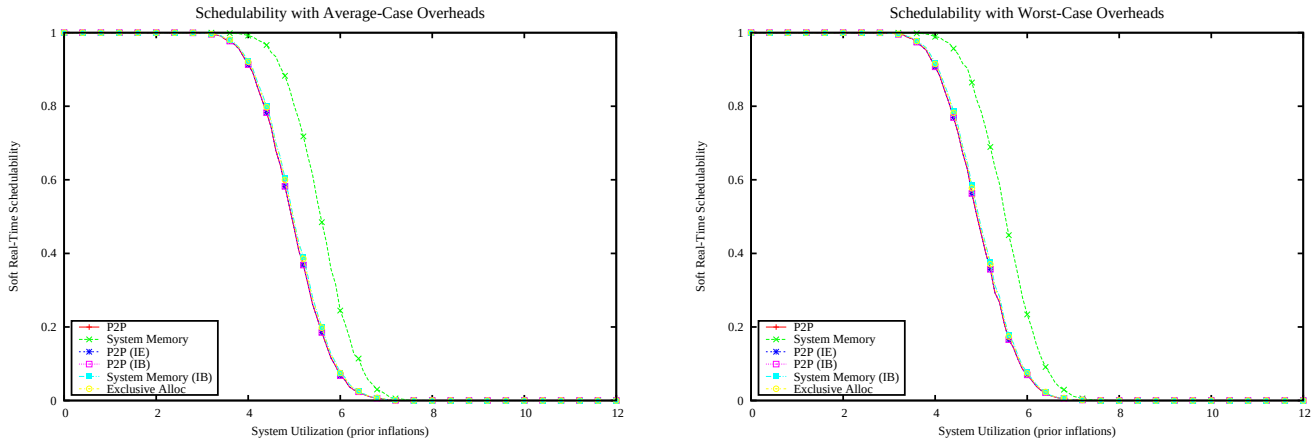

Figure 6572: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

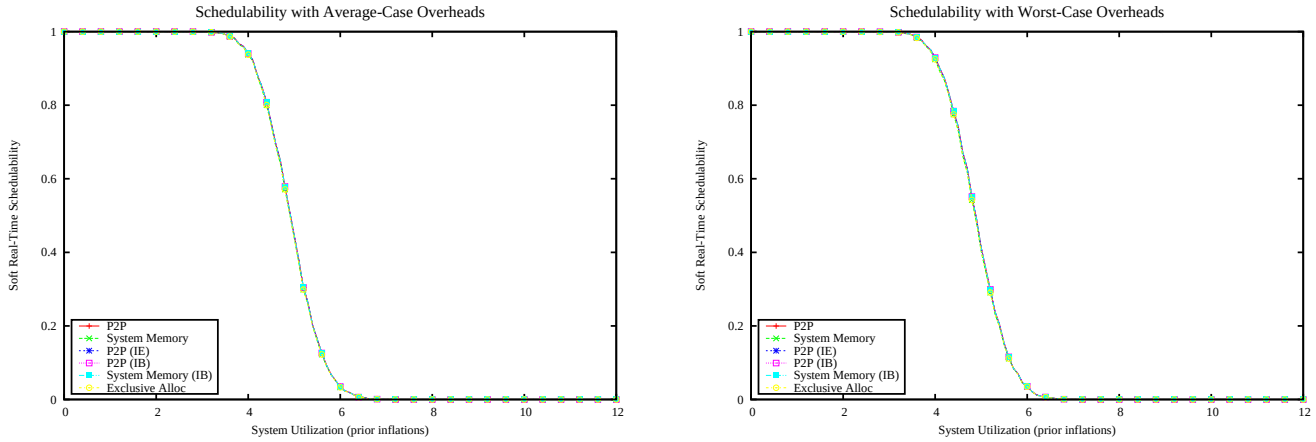

Figure 6573: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

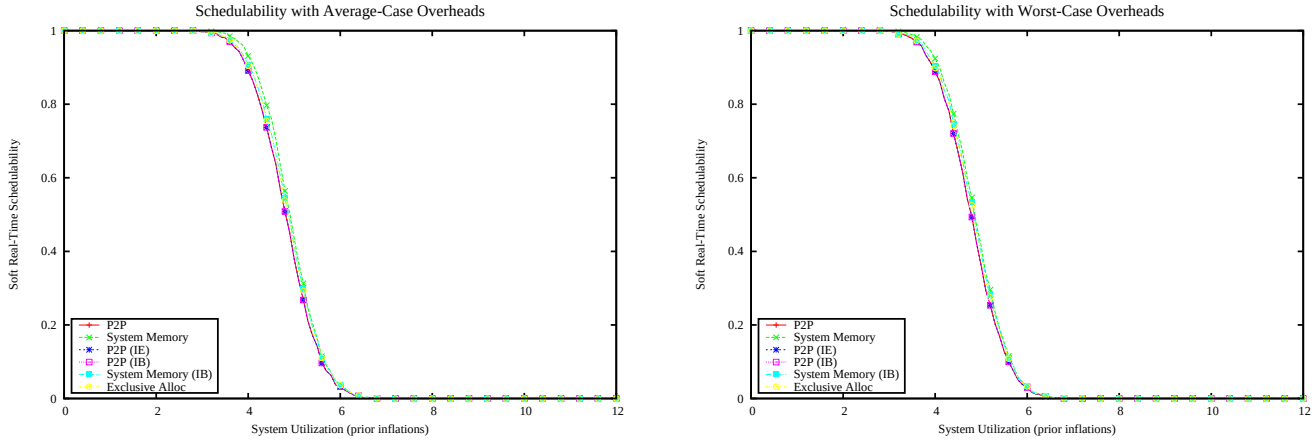

Figure 6574: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

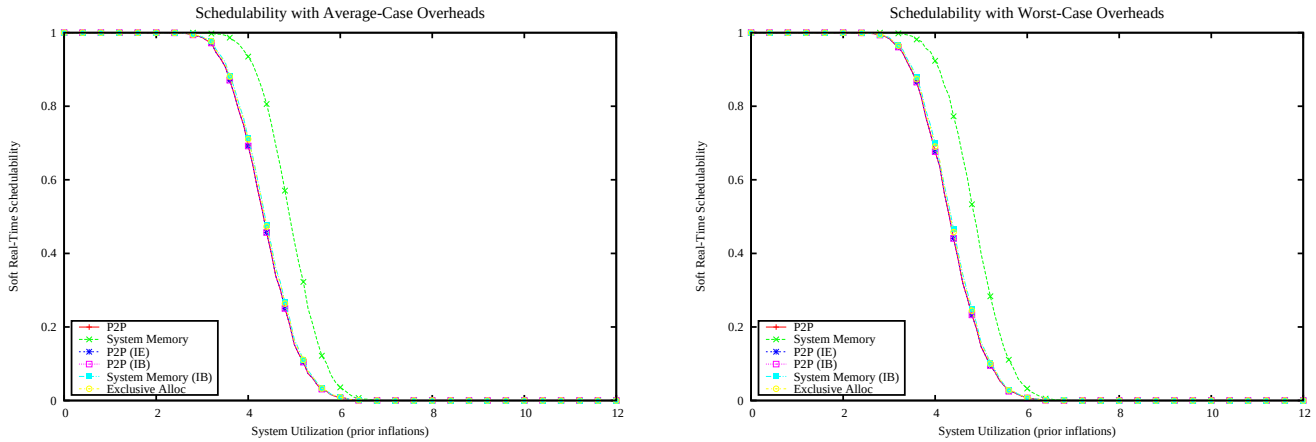

Figure 6575: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

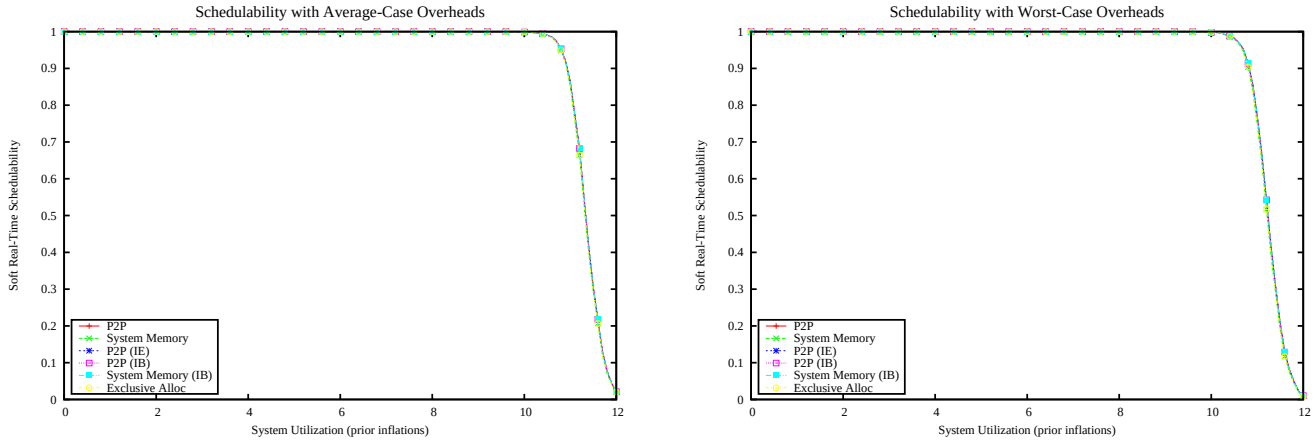

Figure 6576: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

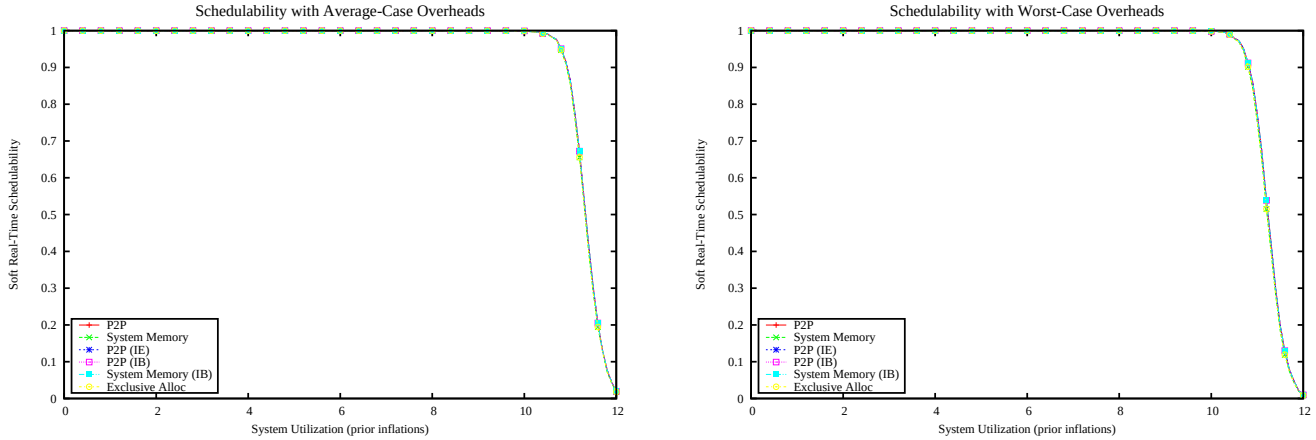

Figure 6577: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

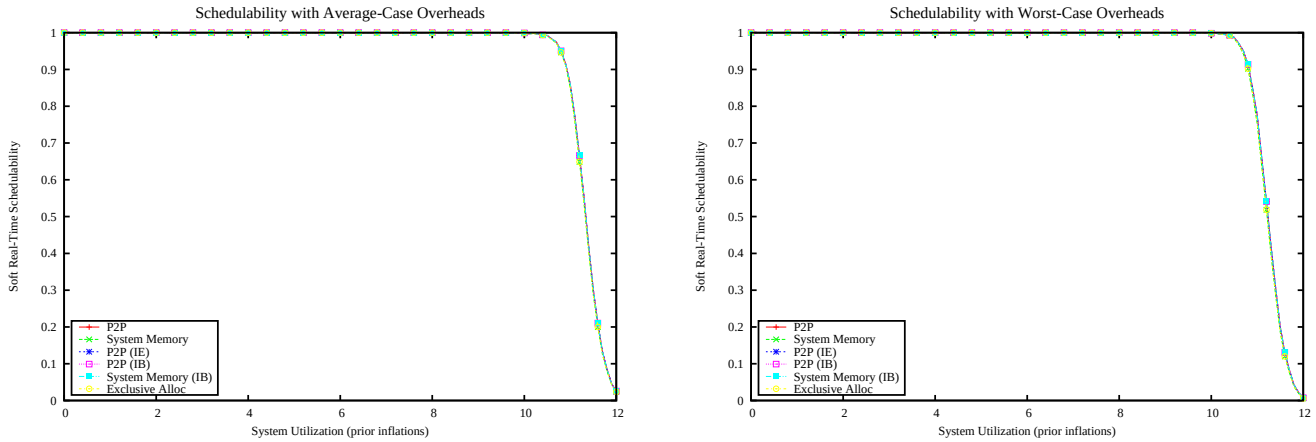

Figure 6578: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

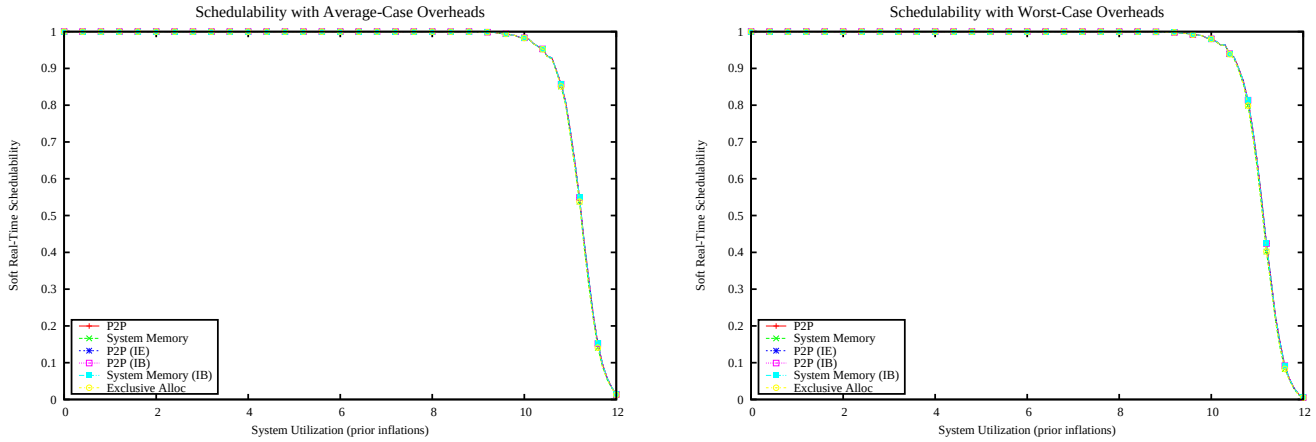

Figure 6579: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

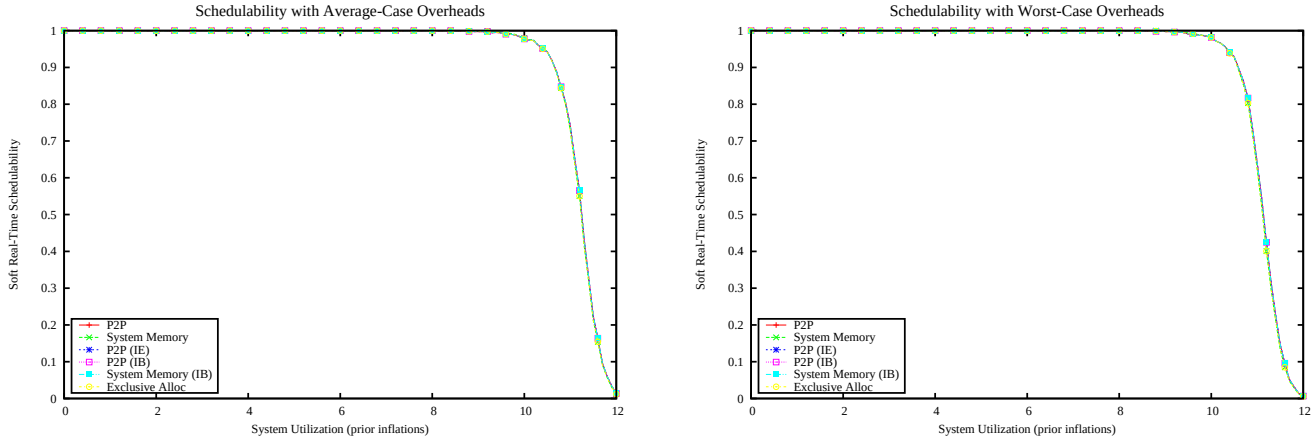

Figure 6580: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

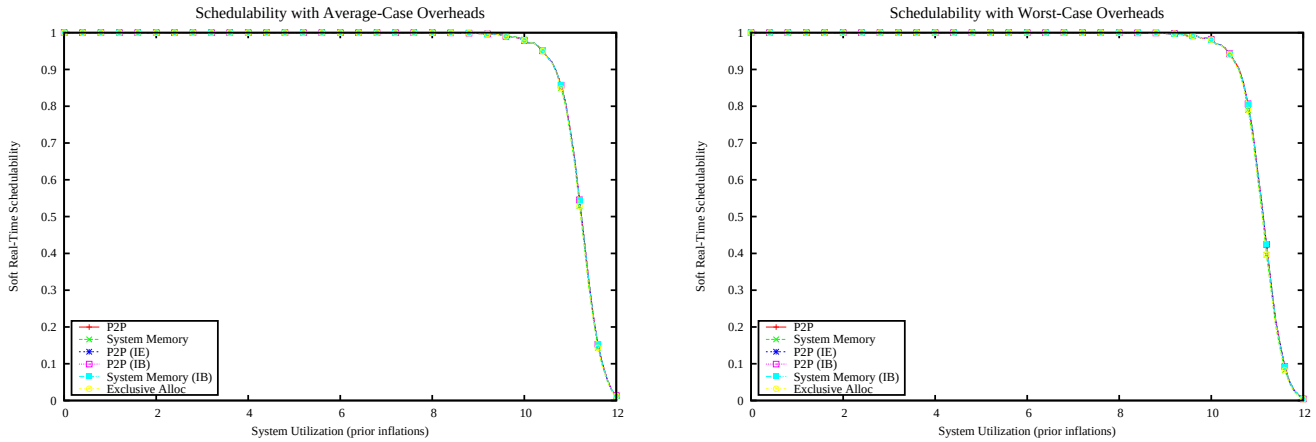

Figure 6581: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

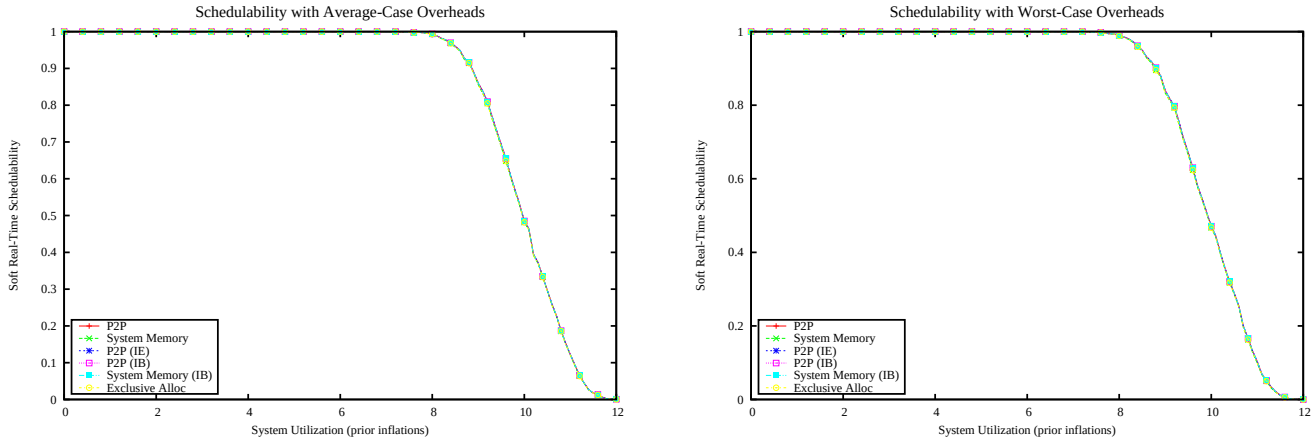

Figure 6582: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

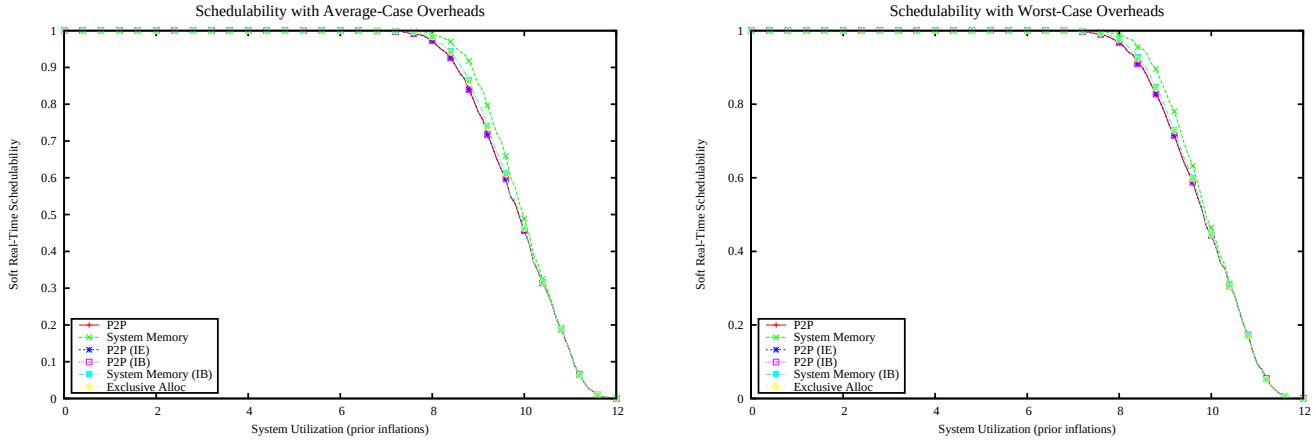

Figure 6583: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

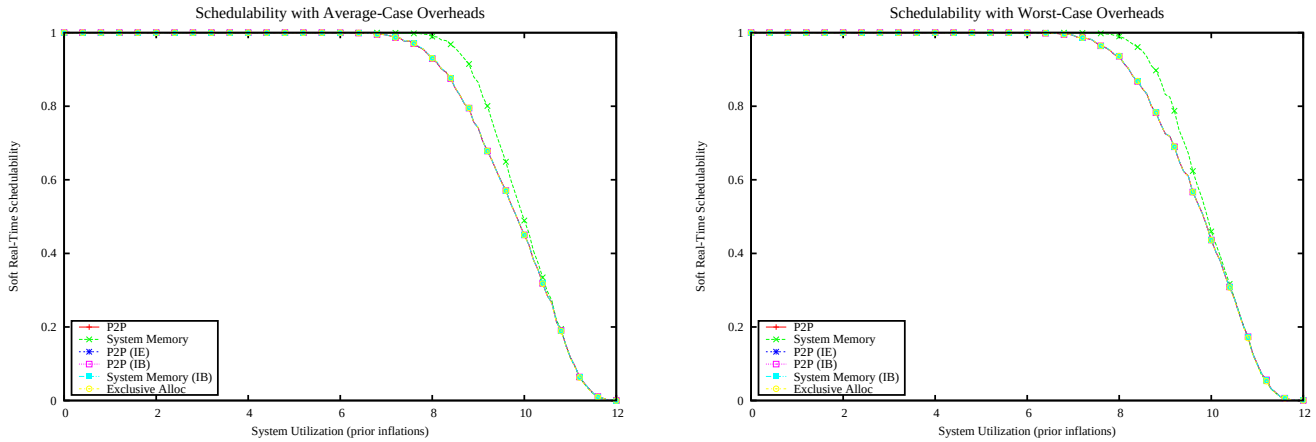

Figure 6584: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

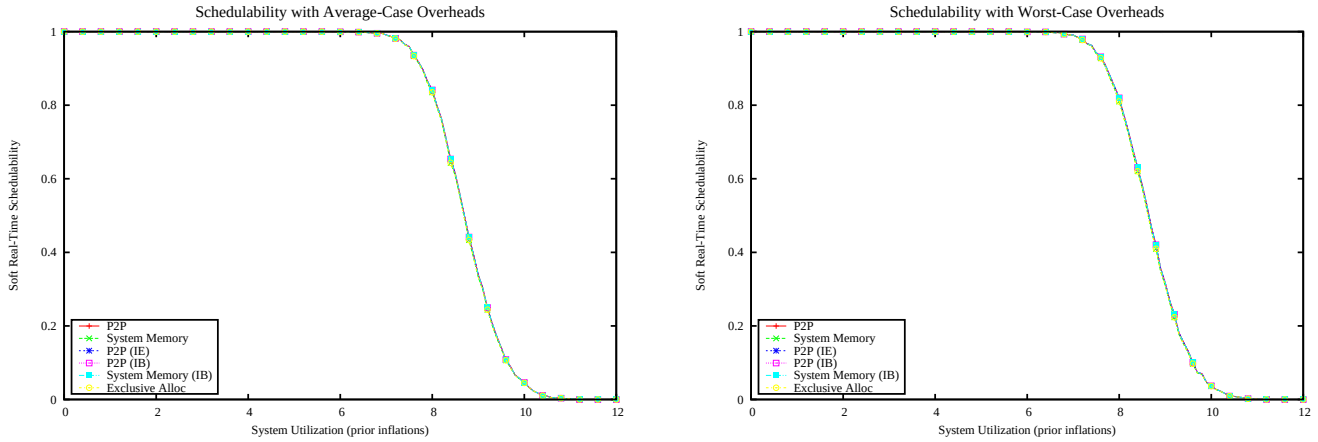

Figure 6585: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

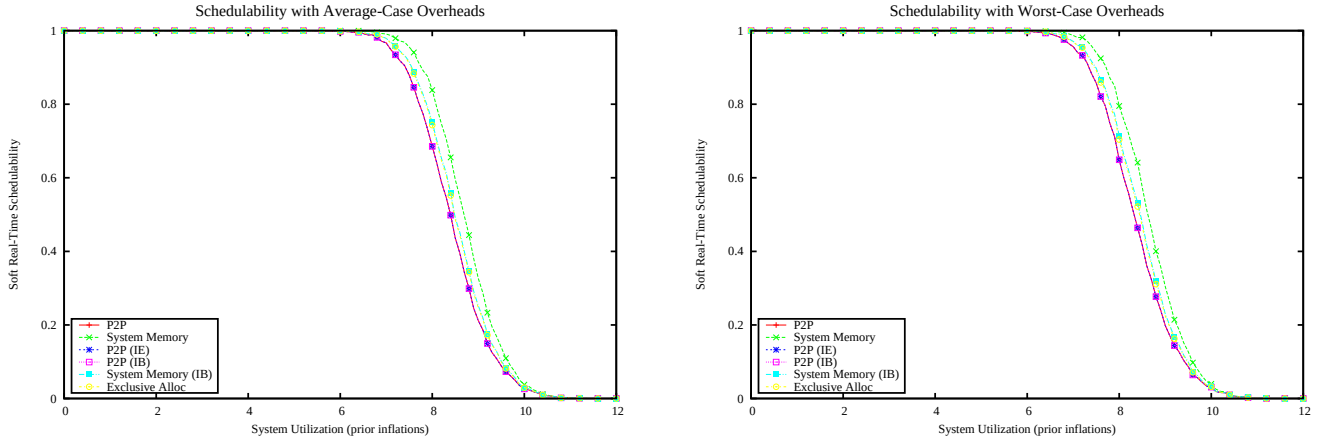

Figure 6586: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

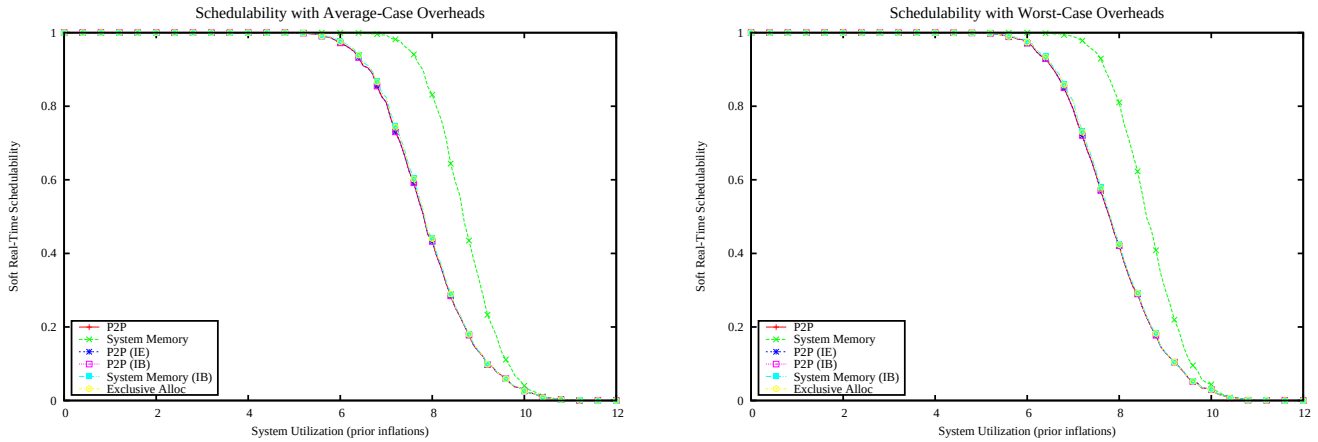

Figure 6587: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

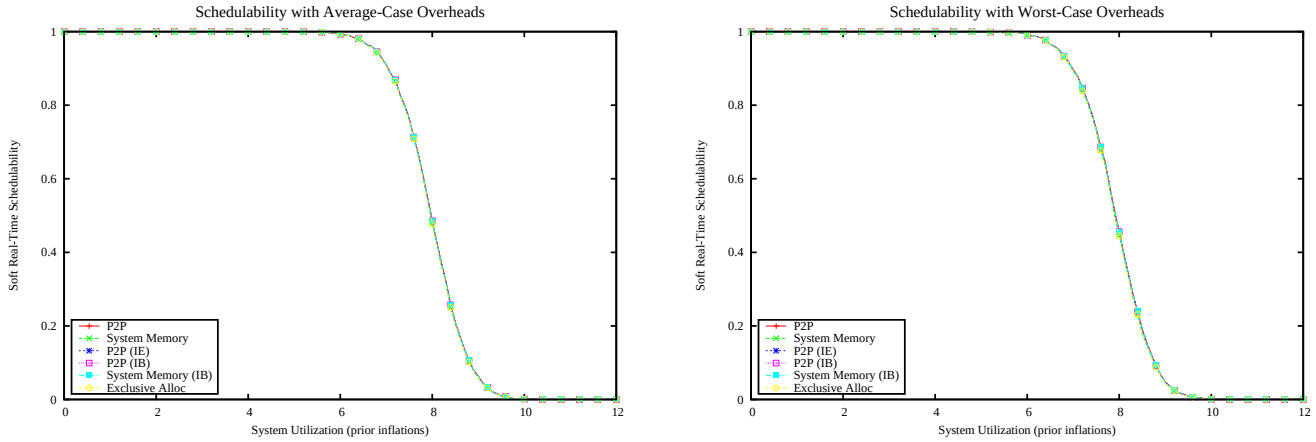

Figure 6588: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

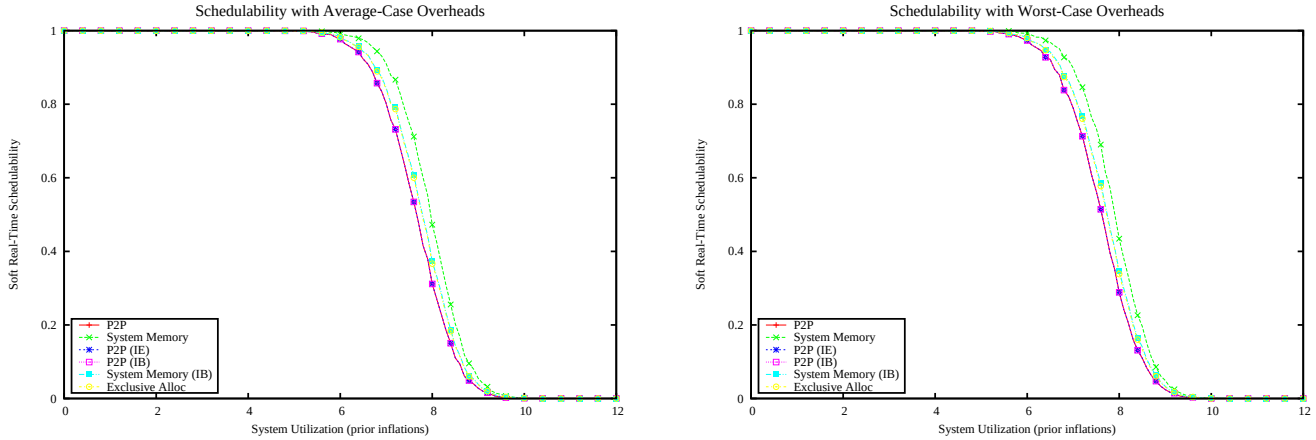

Figure 6589: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

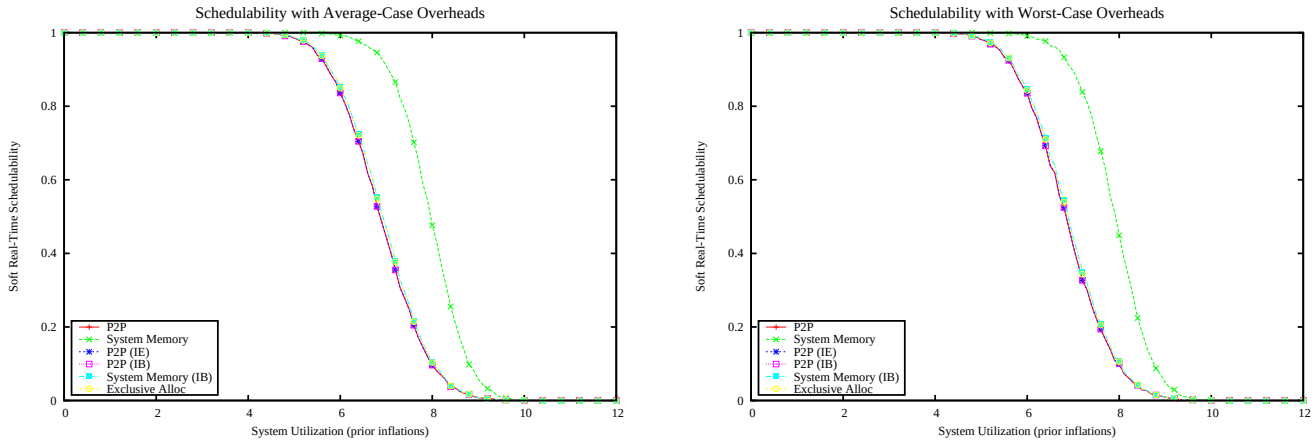

Figure 6590: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

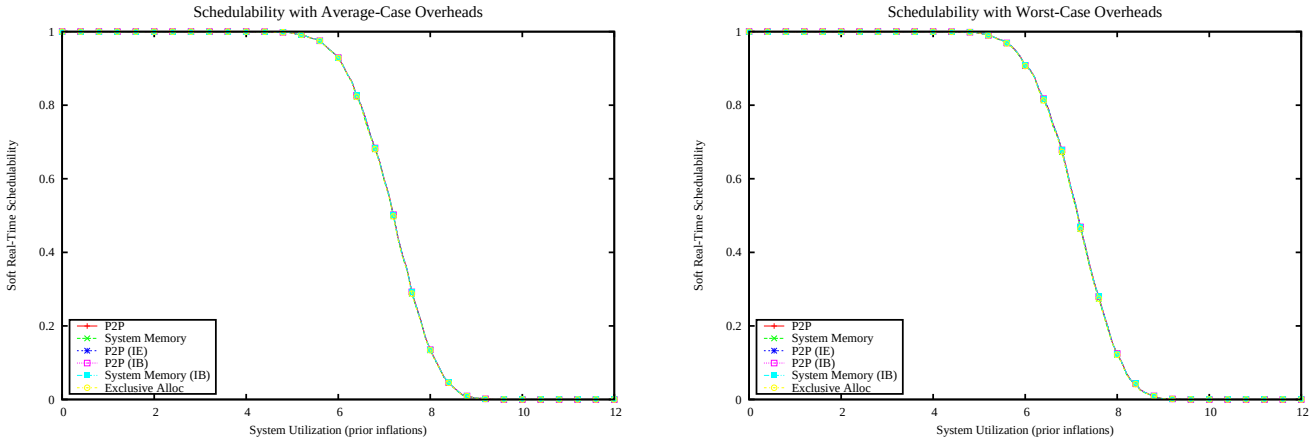

Figure 6591: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

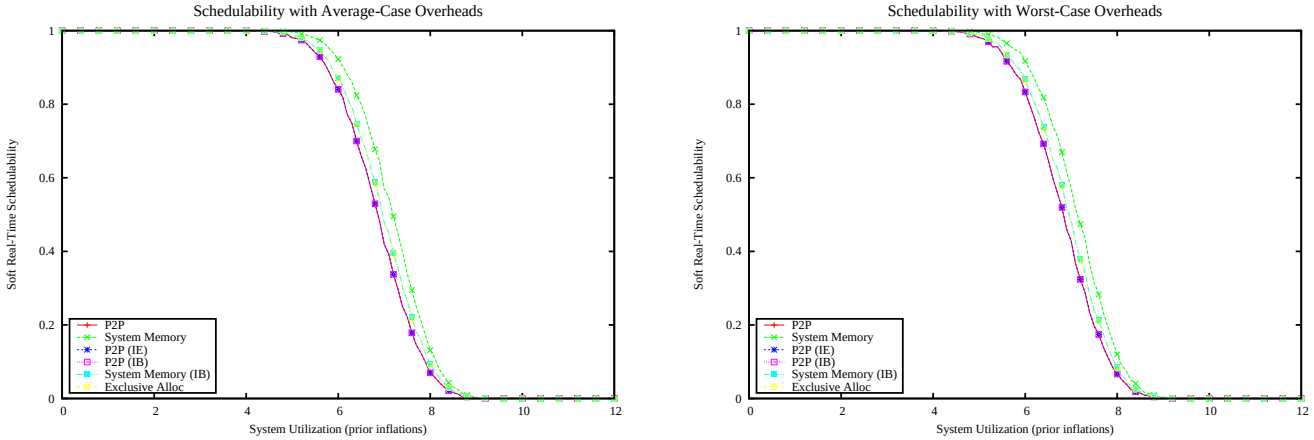

Figure 6592: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

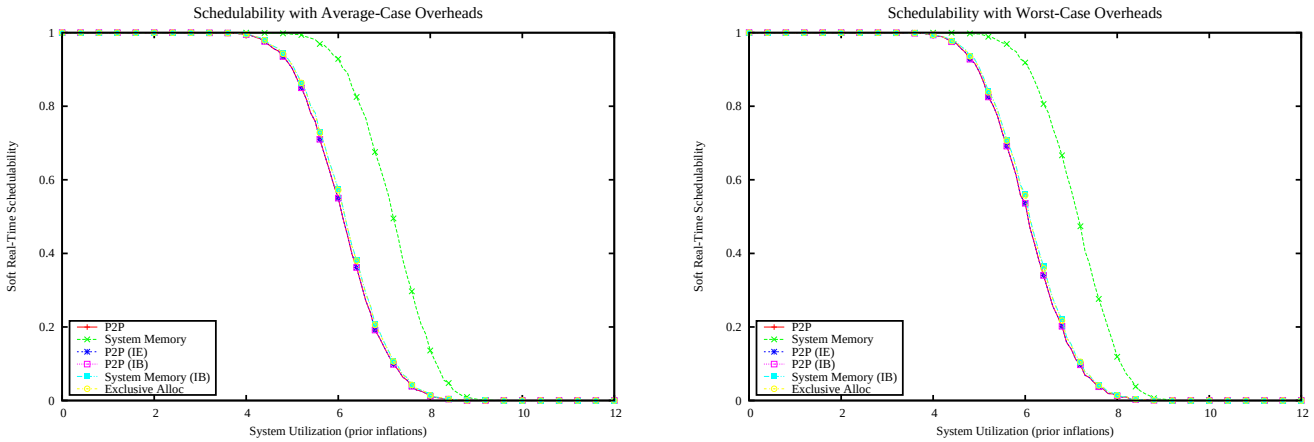

Figure 6593: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

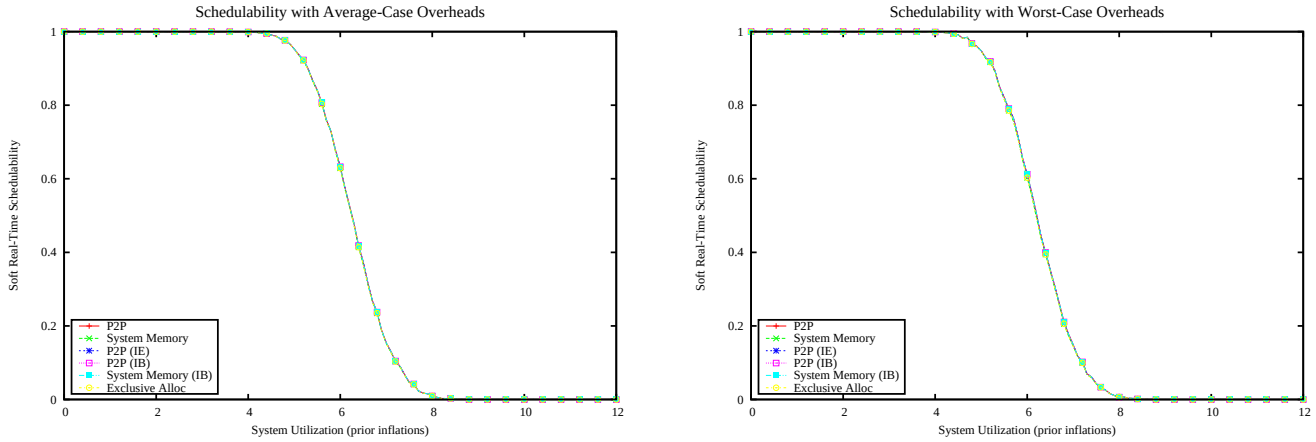

Figure 6594: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

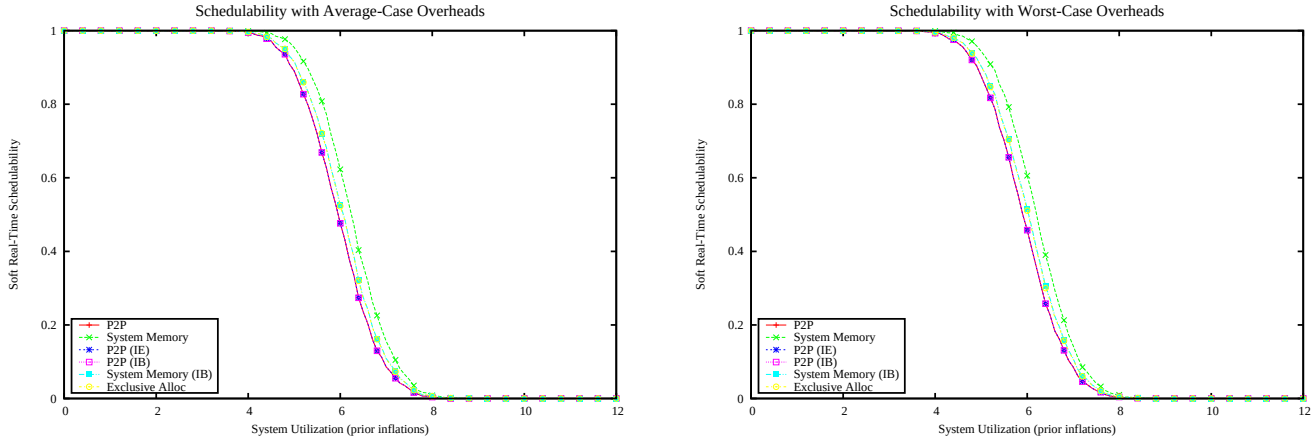

Figure 6595: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

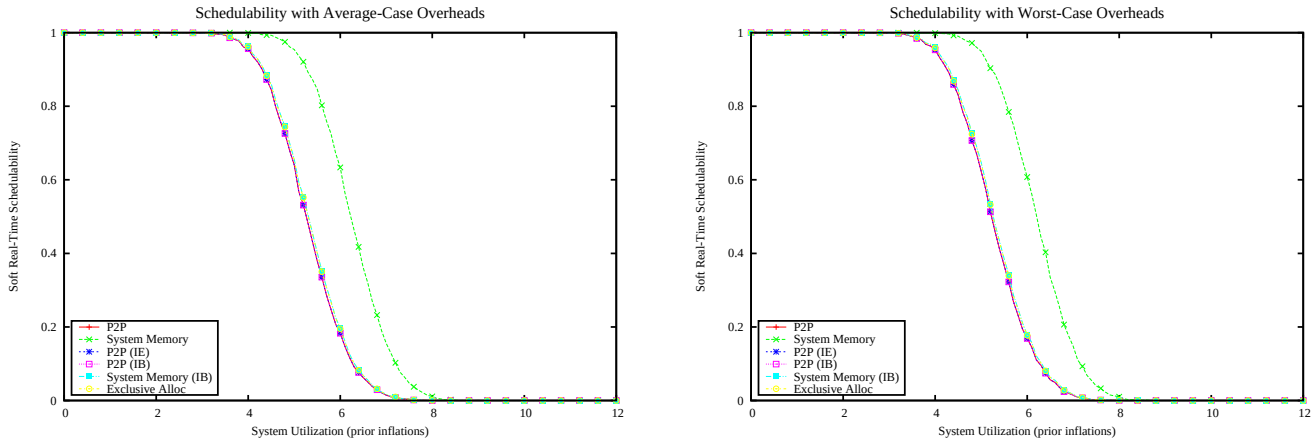

Figure 6596: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

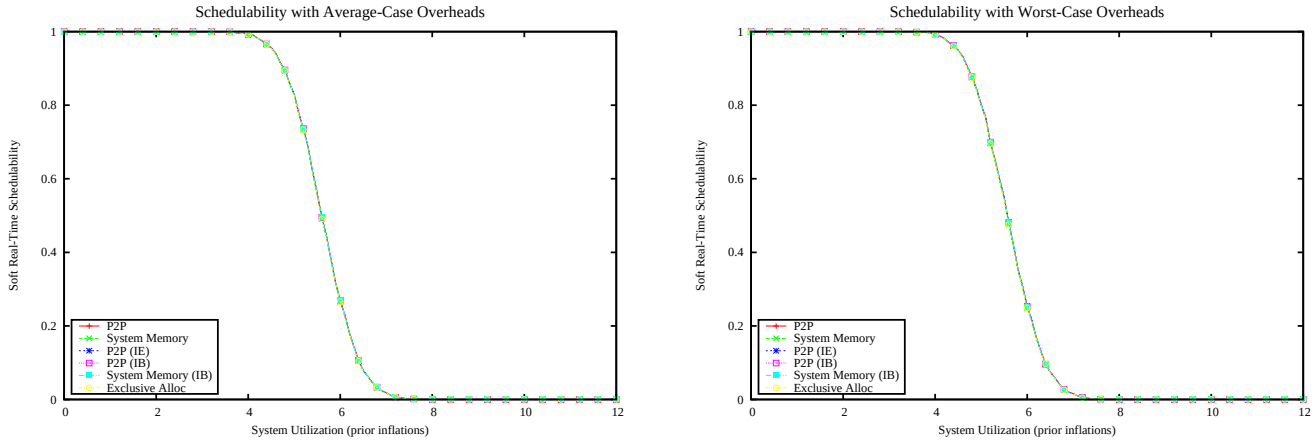

Figure 6597: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

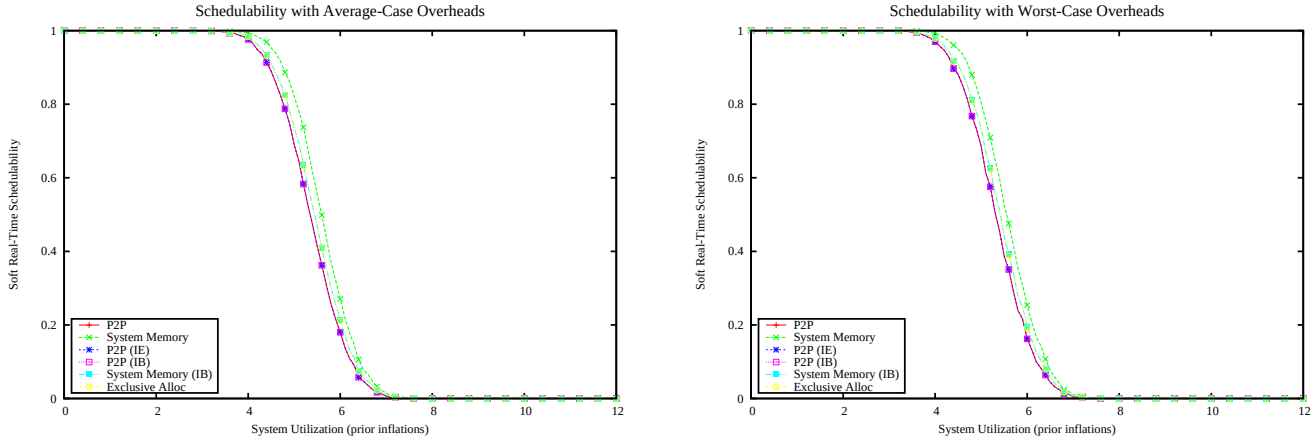

Figure 6598: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

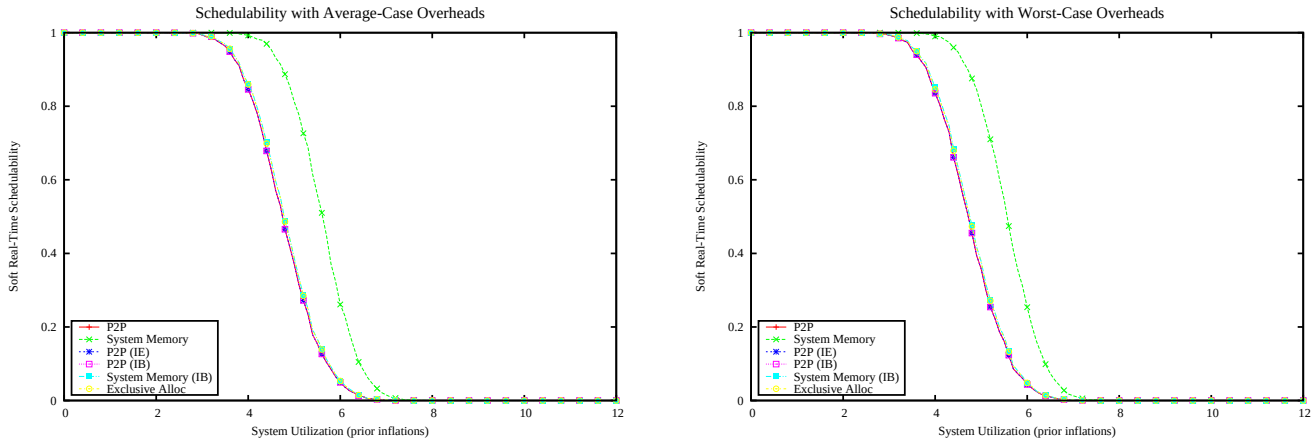

Figure 6599: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

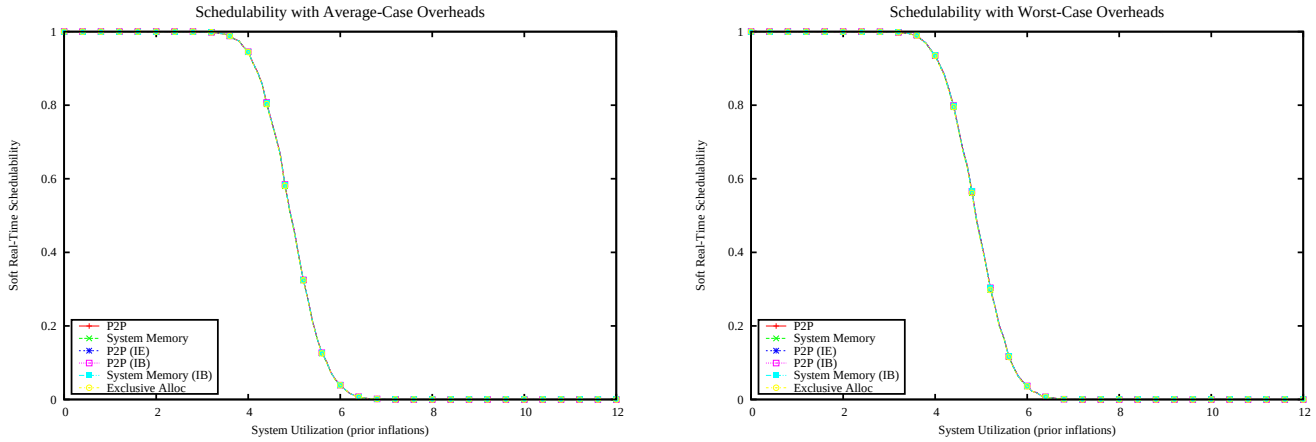

Figure 6600: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

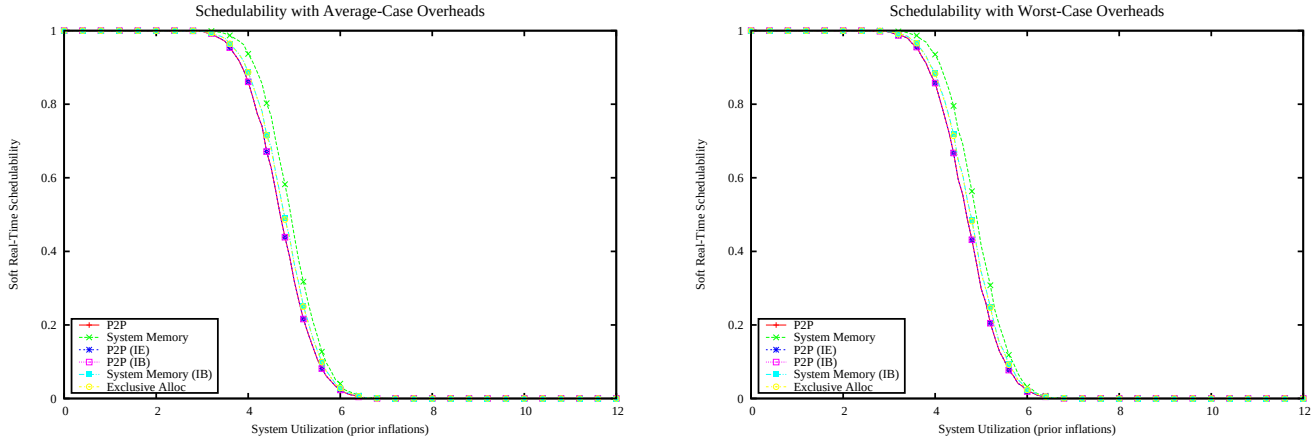

Figure 6601: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

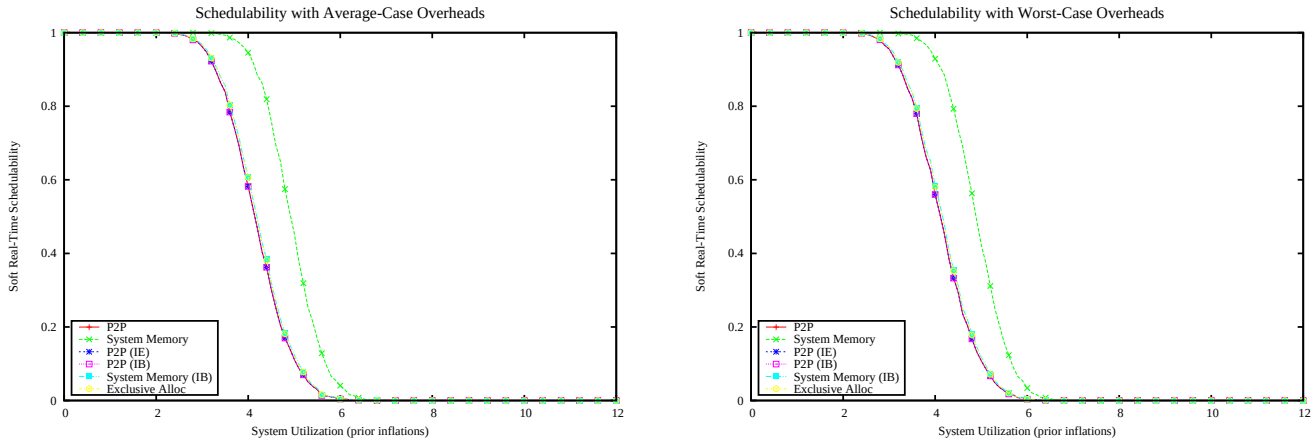

Figure 6602: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

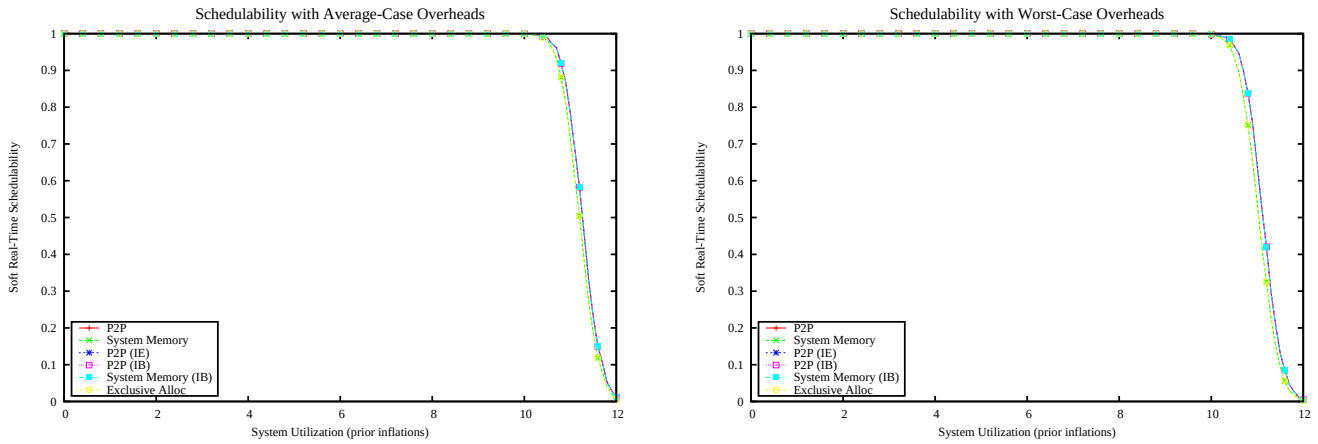

Figure 6603: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

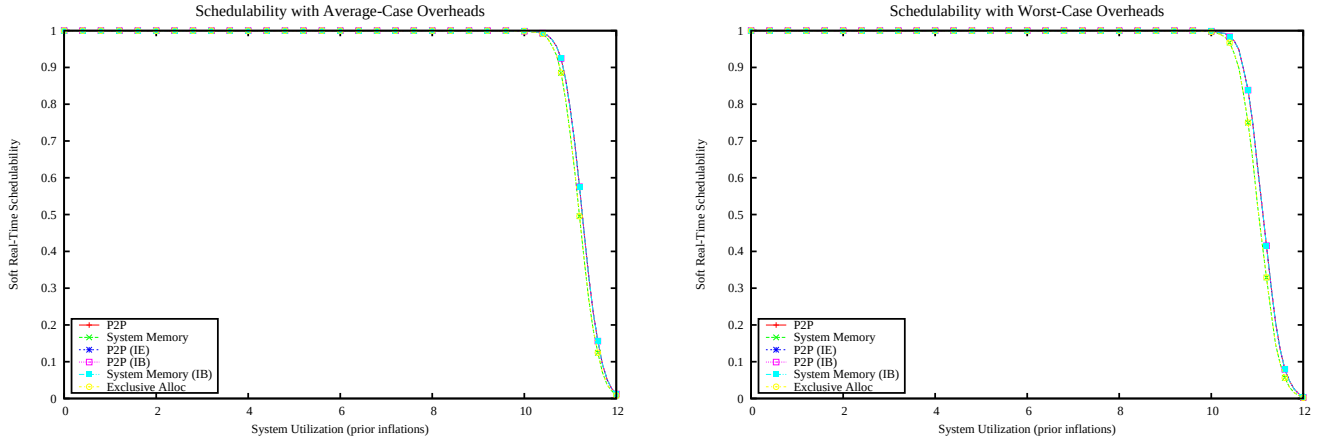

Figure 6604: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

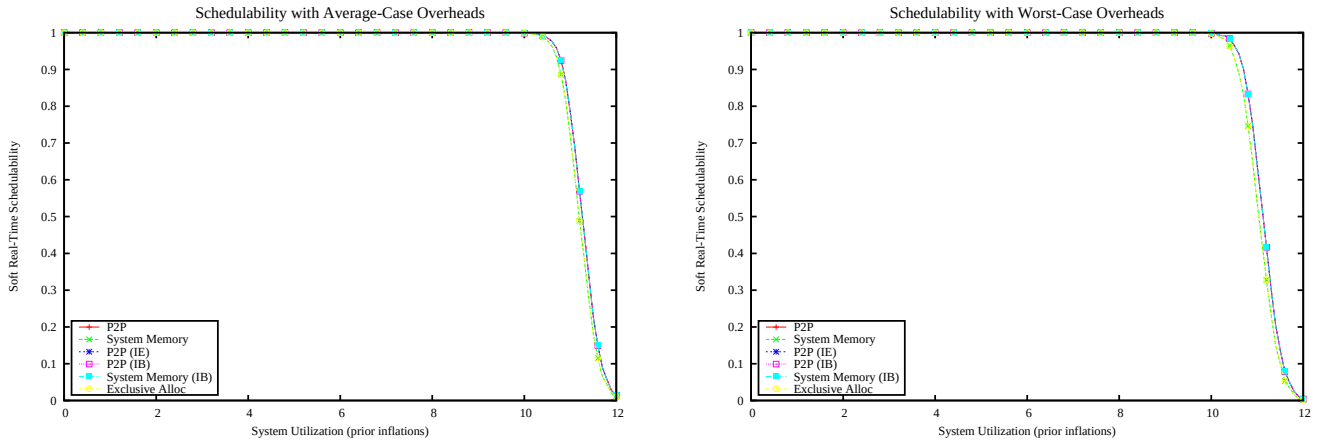

Figure 6605: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

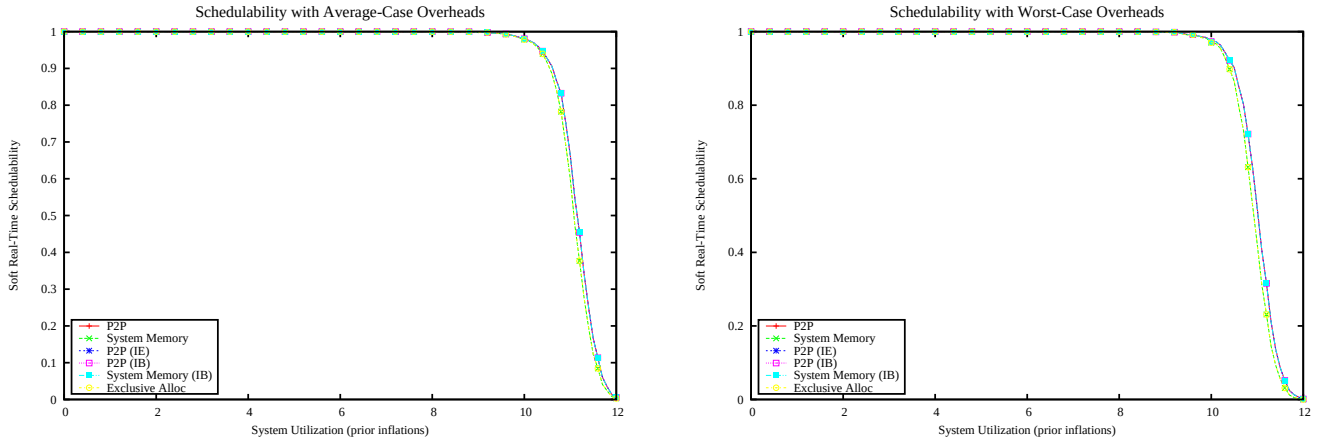

Figure 6606: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

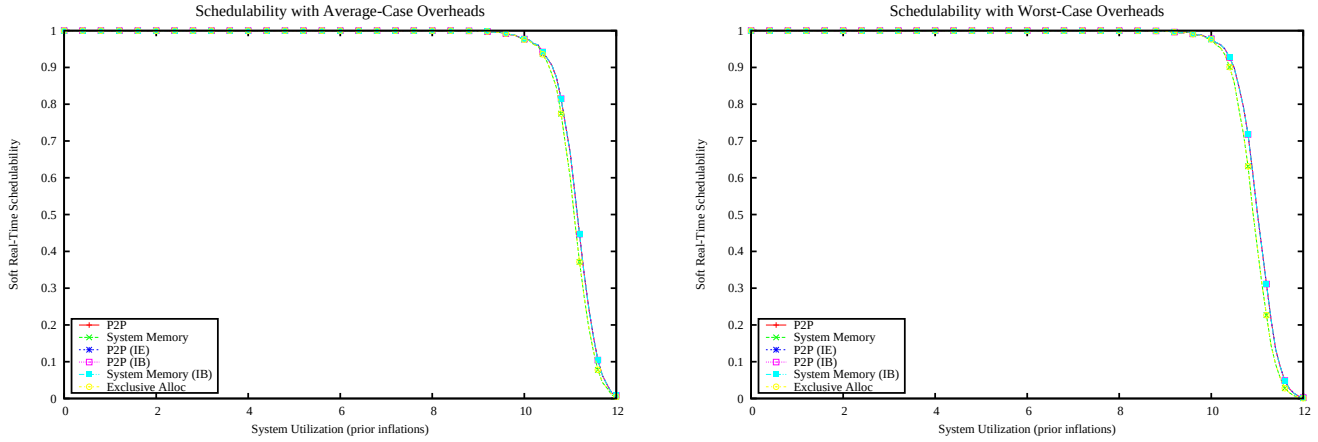

Figure 6607: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

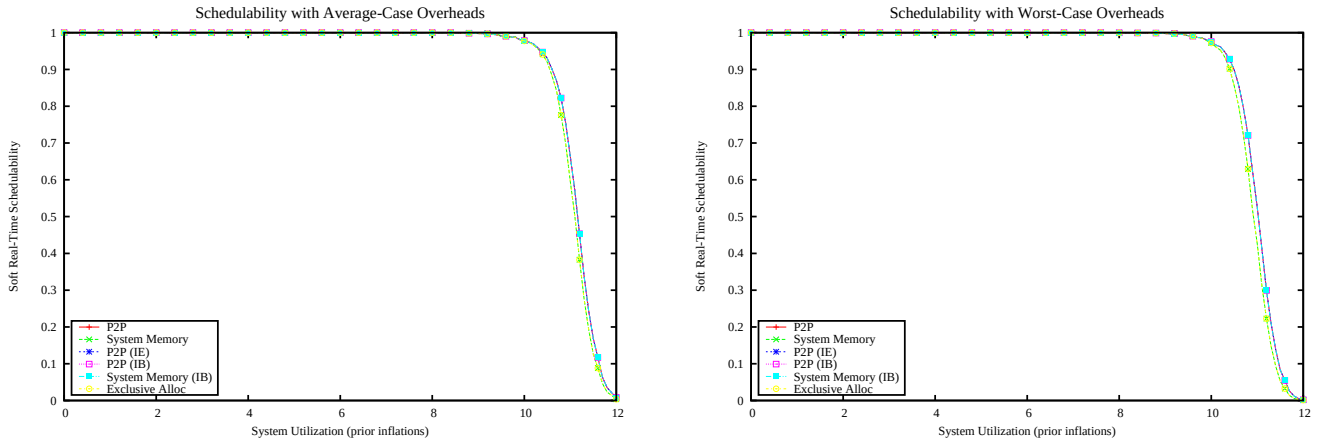

Figure 6608: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

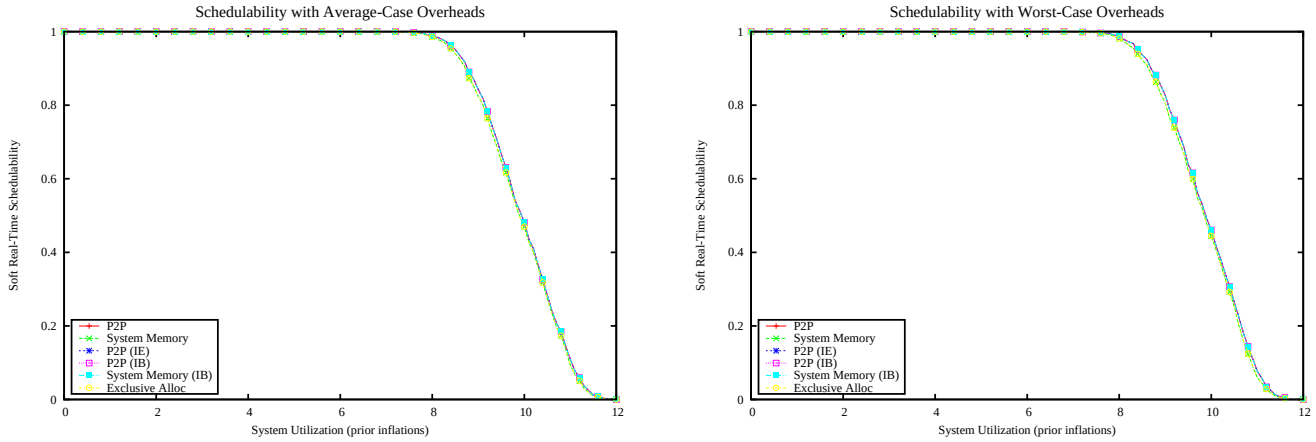

Figure 6609: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

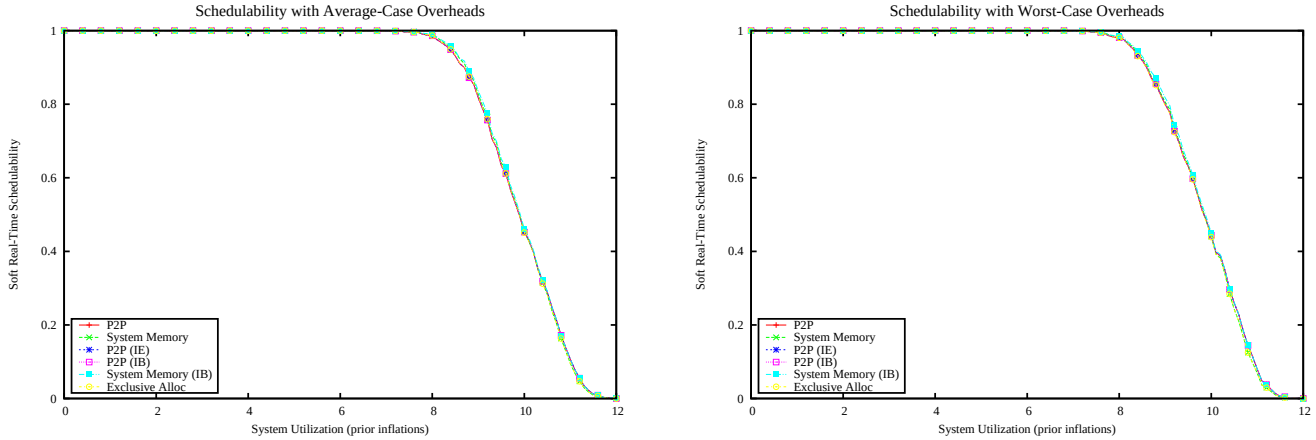

Figure 6610: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

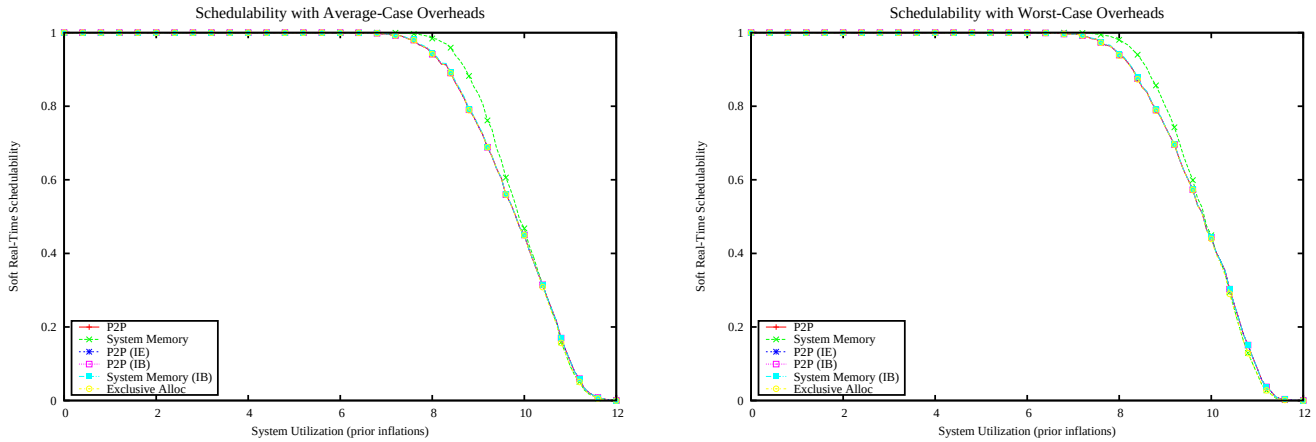

Figure 6611: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

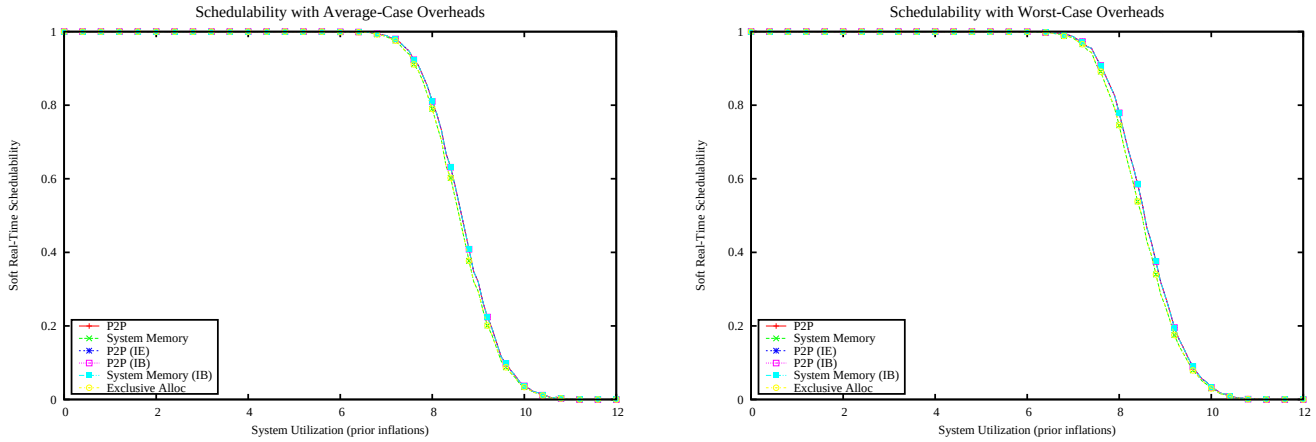

Figure 6612: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

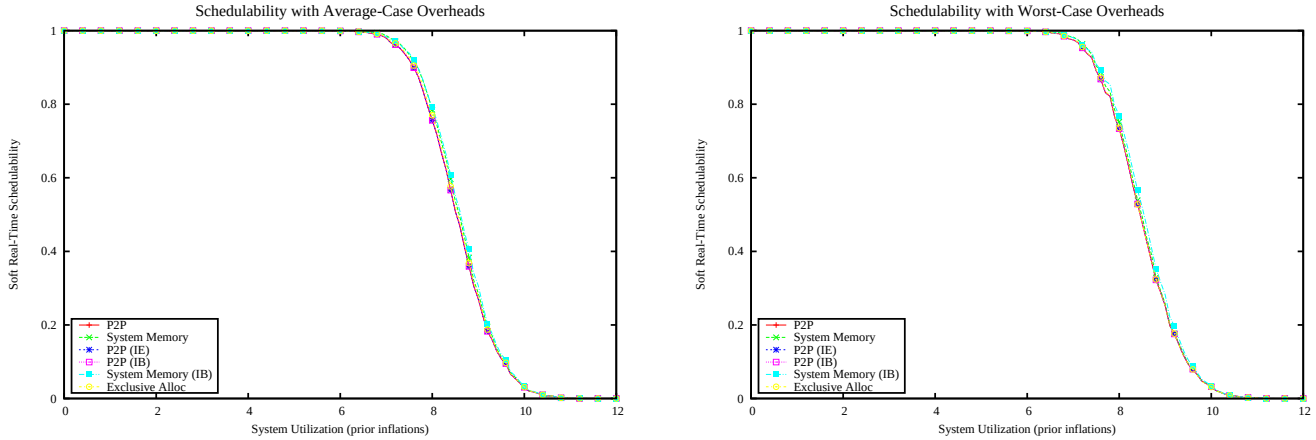

Figure 6613: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

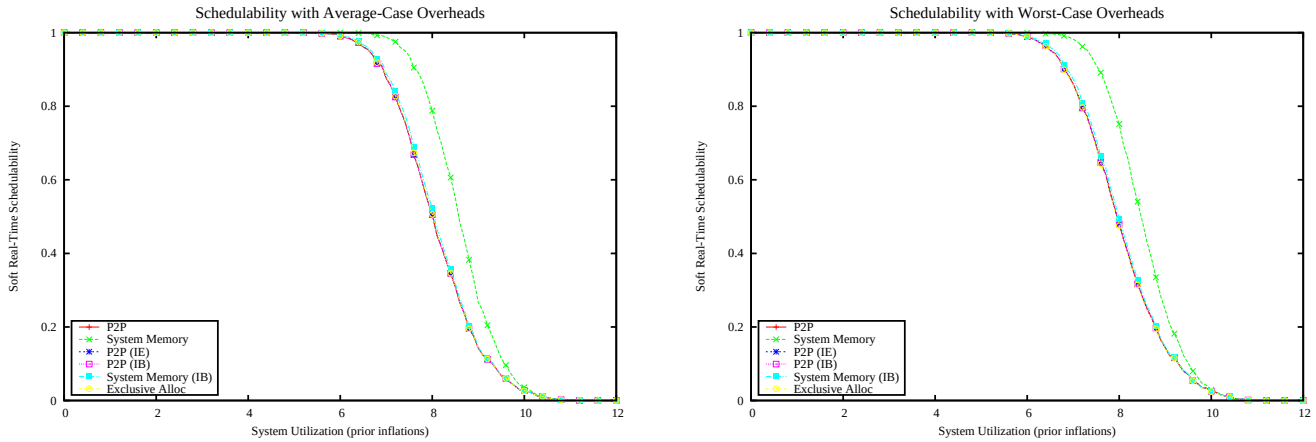

Figure 6614: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

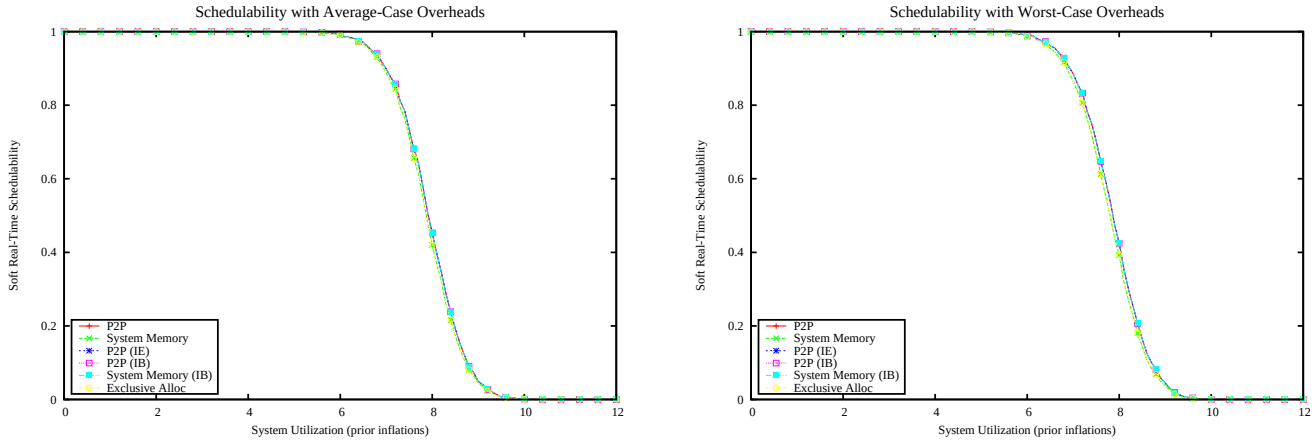

Figure 6615: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

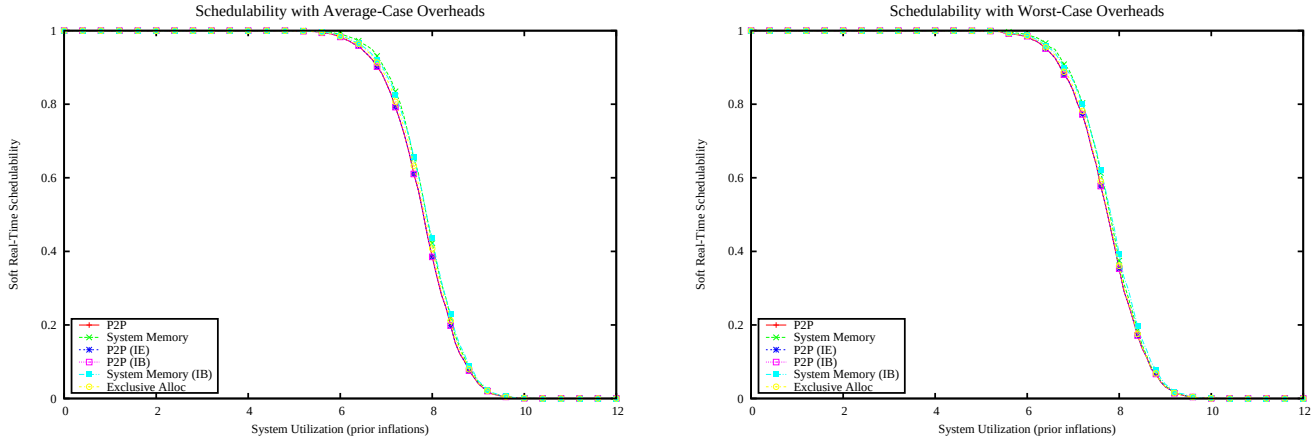

Figure 6616: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

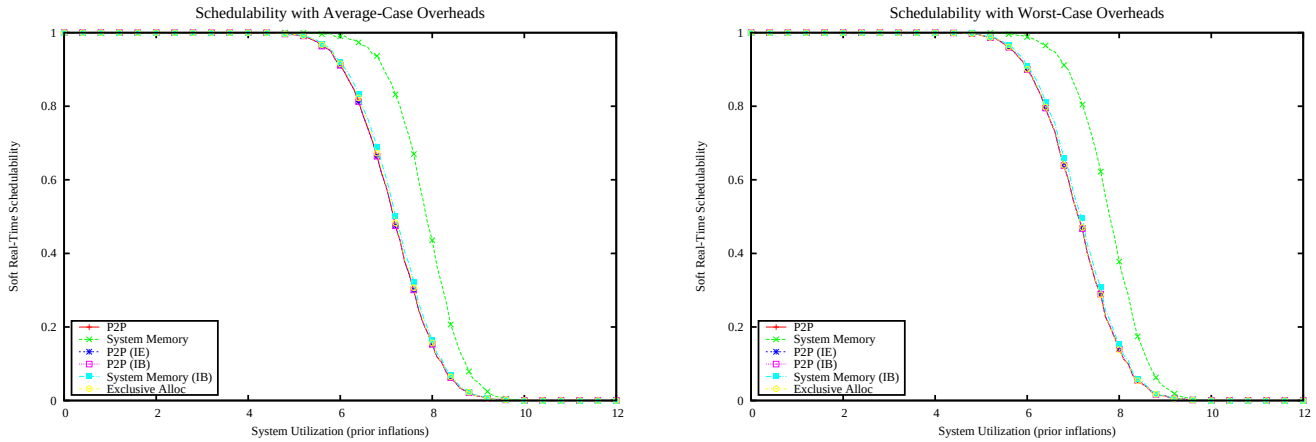

Figure 6617: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

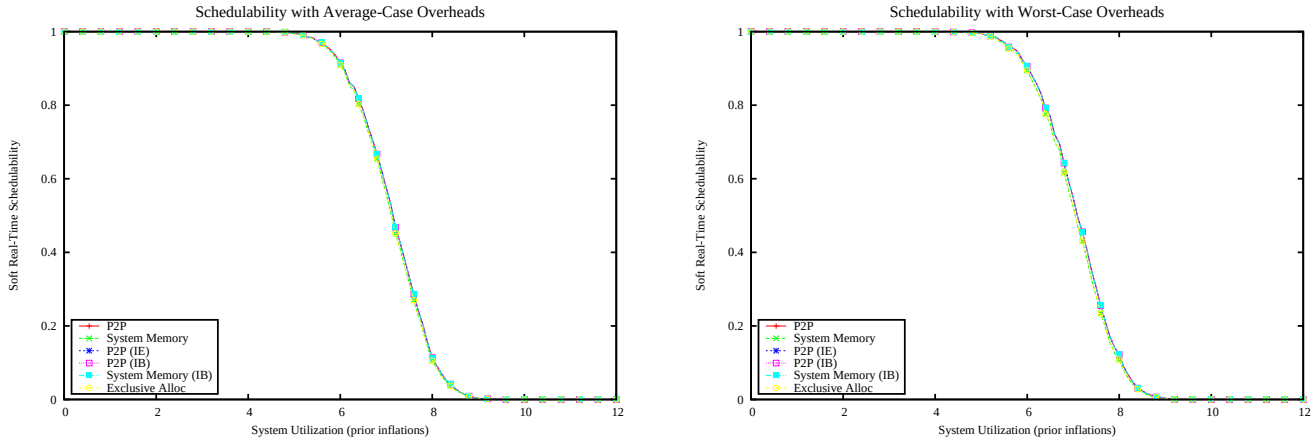

Figure 6618: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

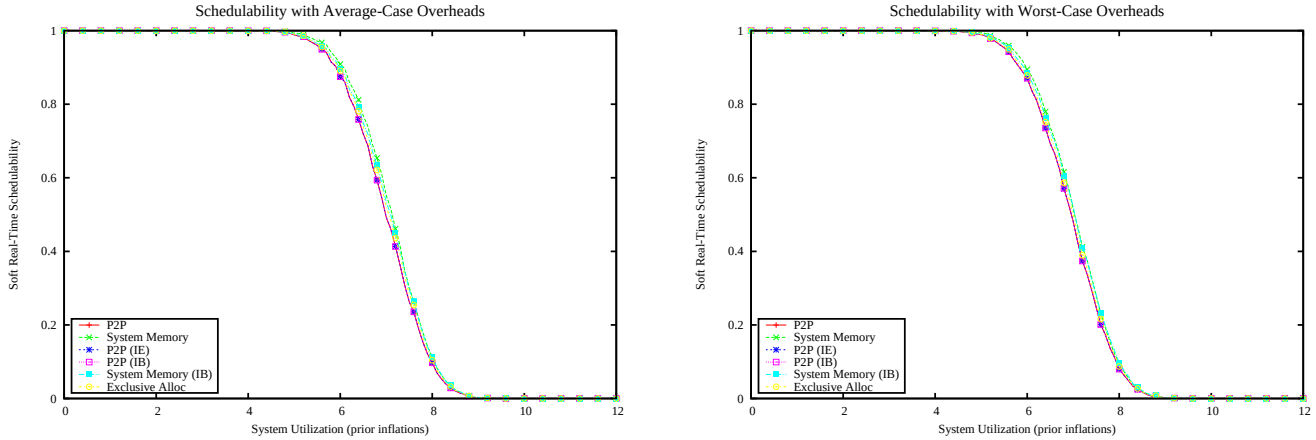

Figure 6619: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

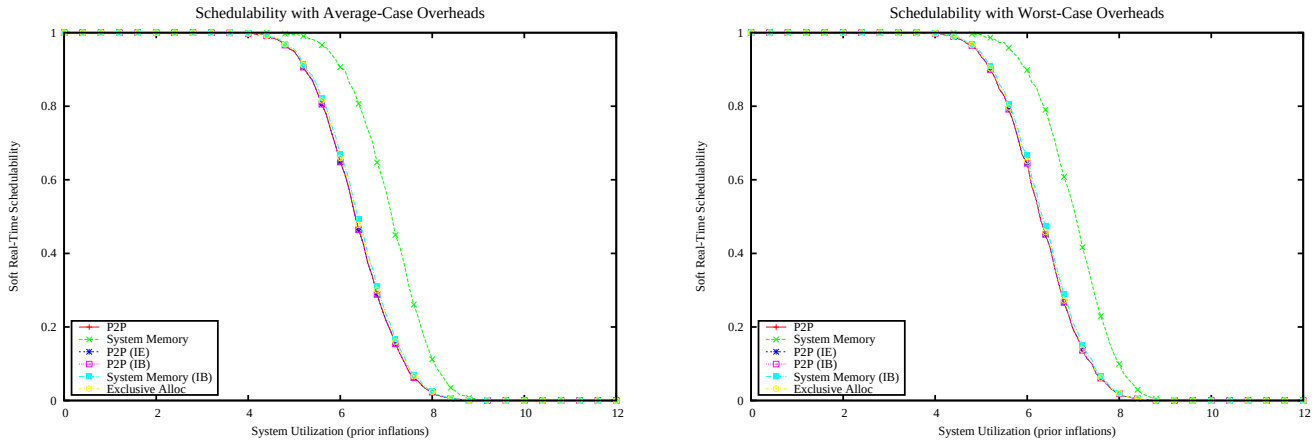

Figure 6620: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

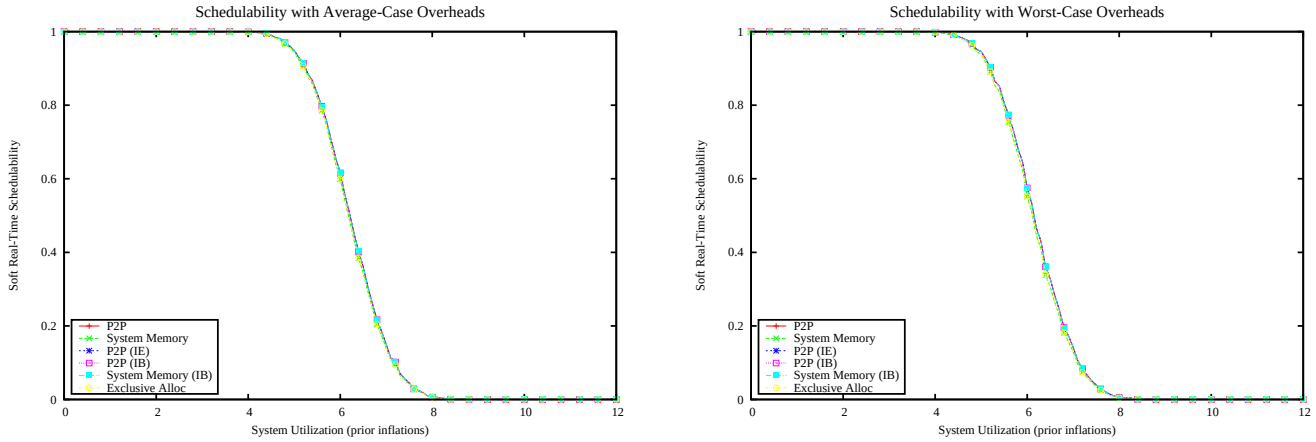

Figure 6621: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

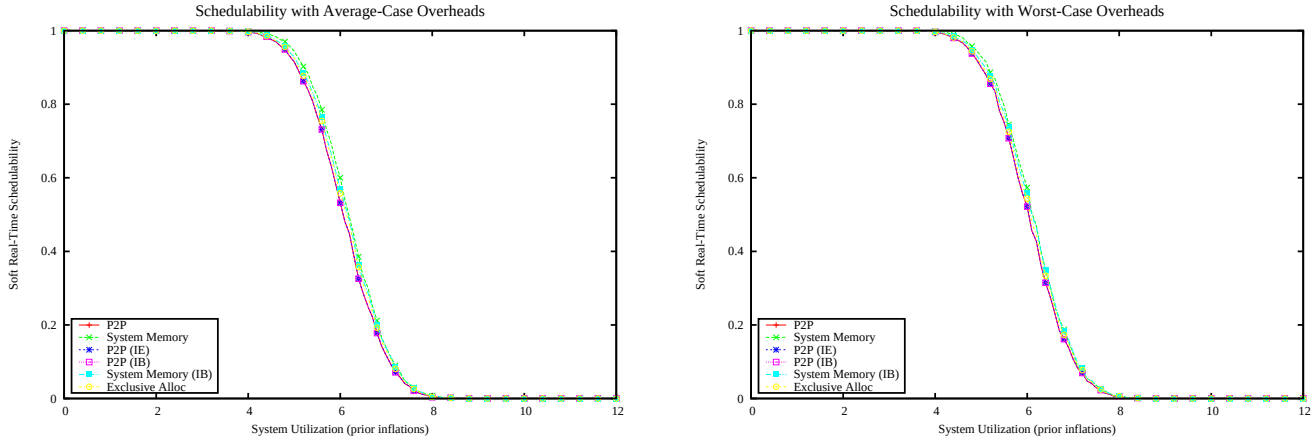

Figure 6622: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

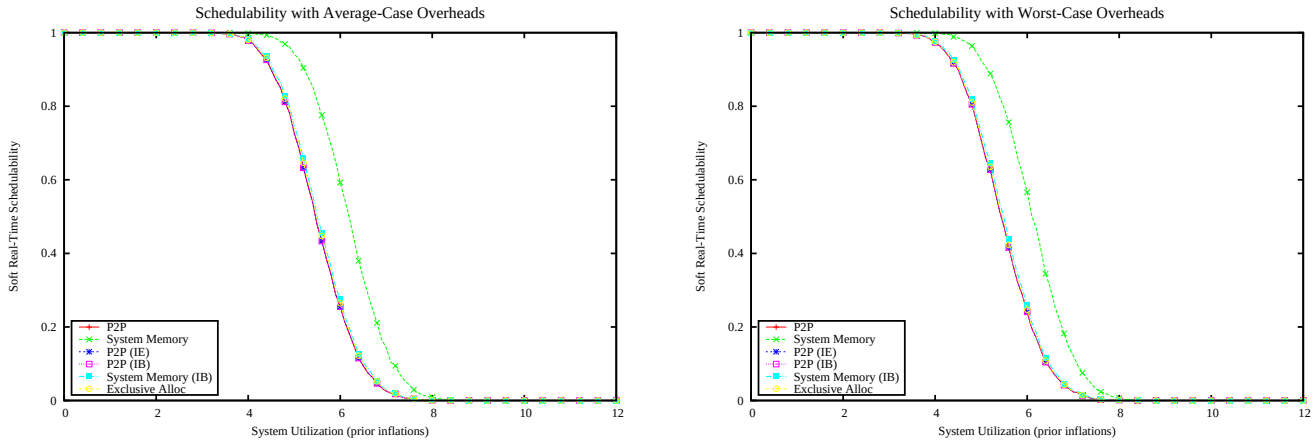

Figure 6623: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

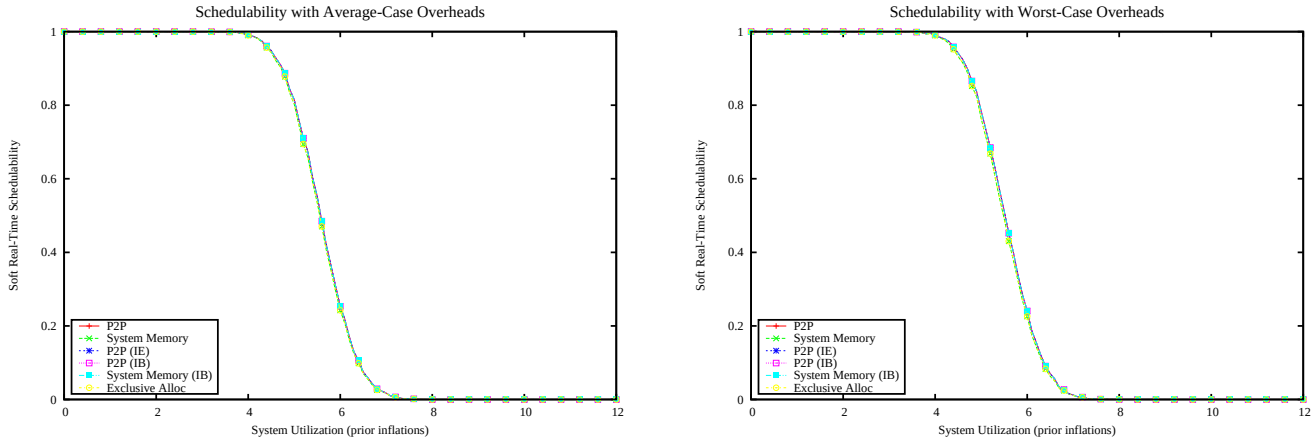

Figure 6624: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

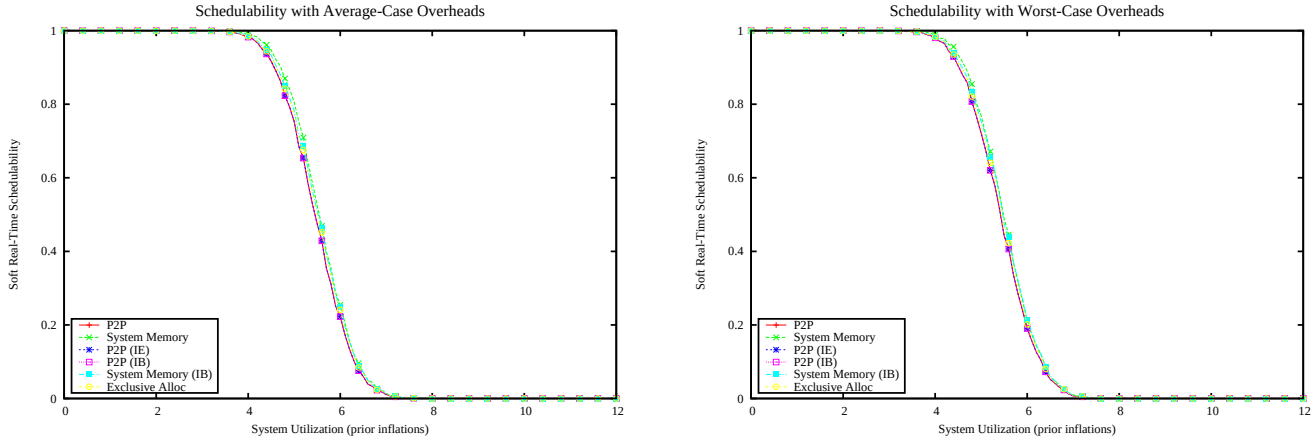

Figure 6625: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

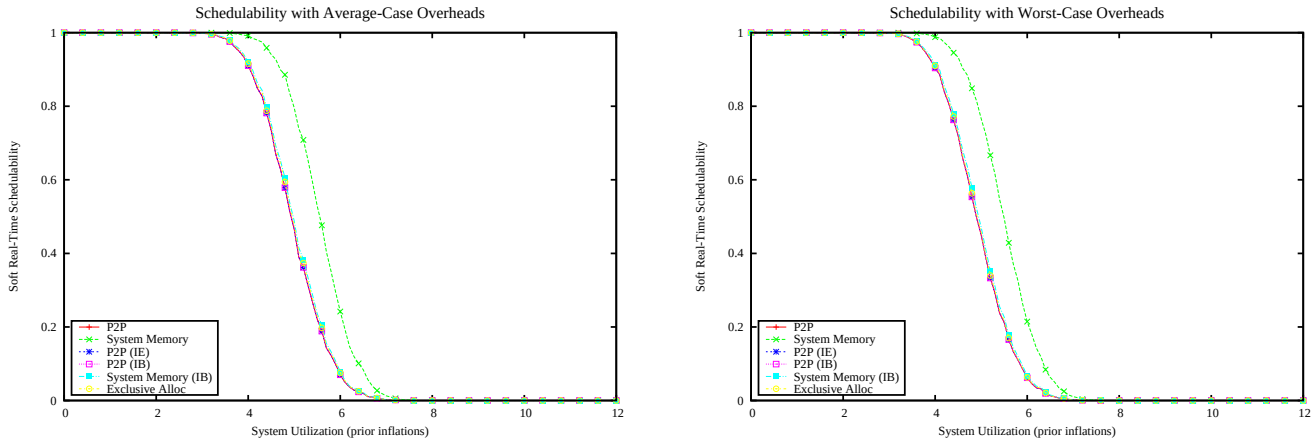

Figure 6626: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

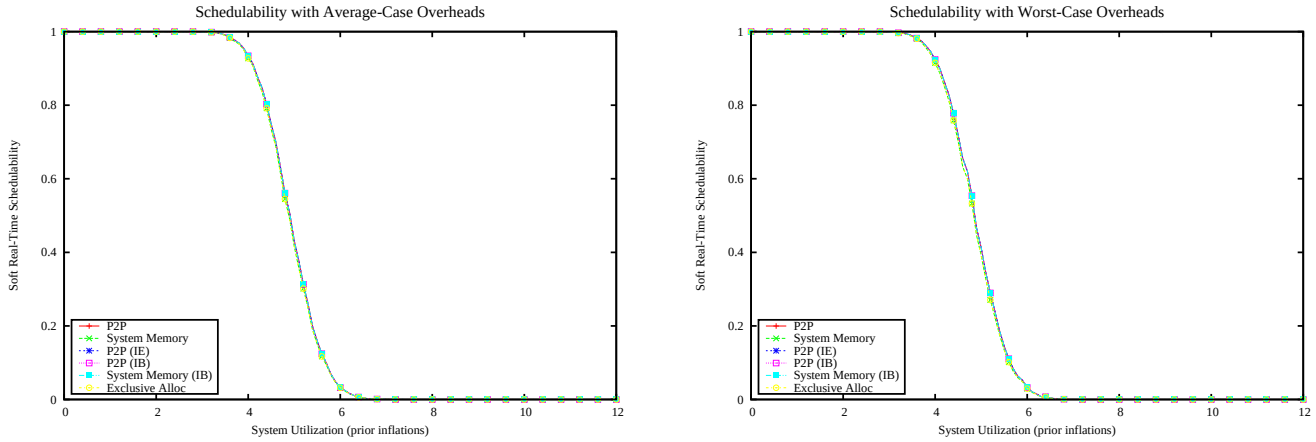

Figure 6627: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

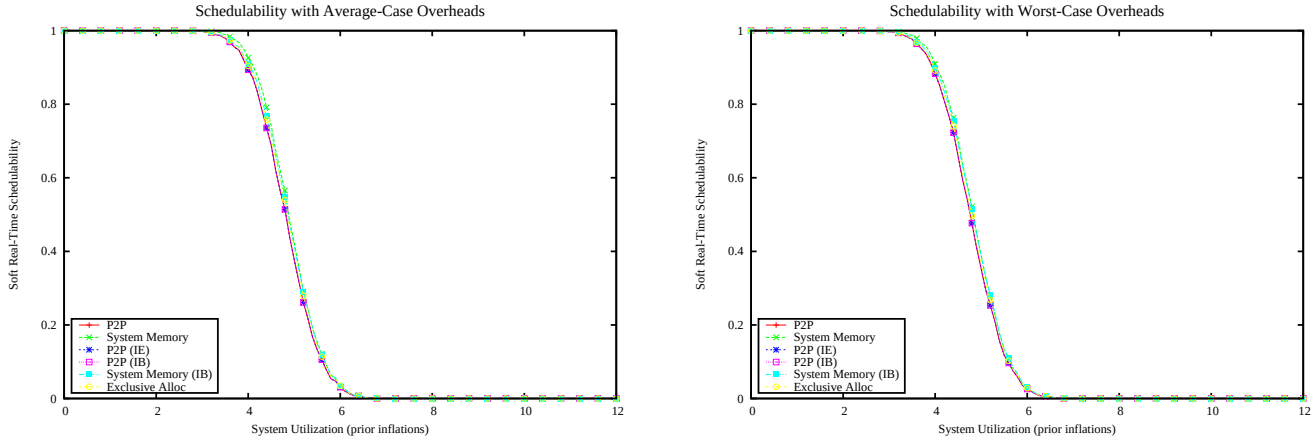

Figure 6628: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

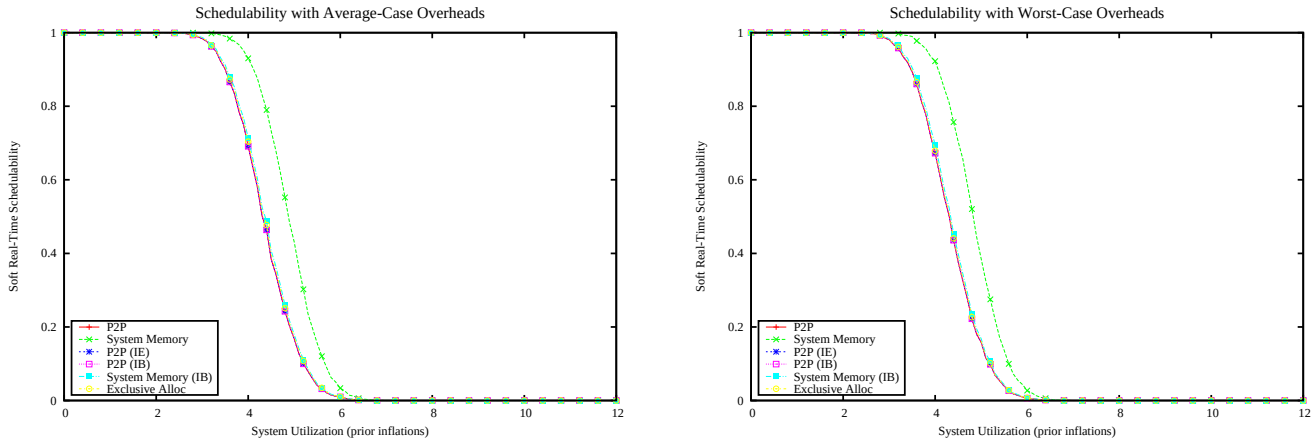

Figure 6629: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

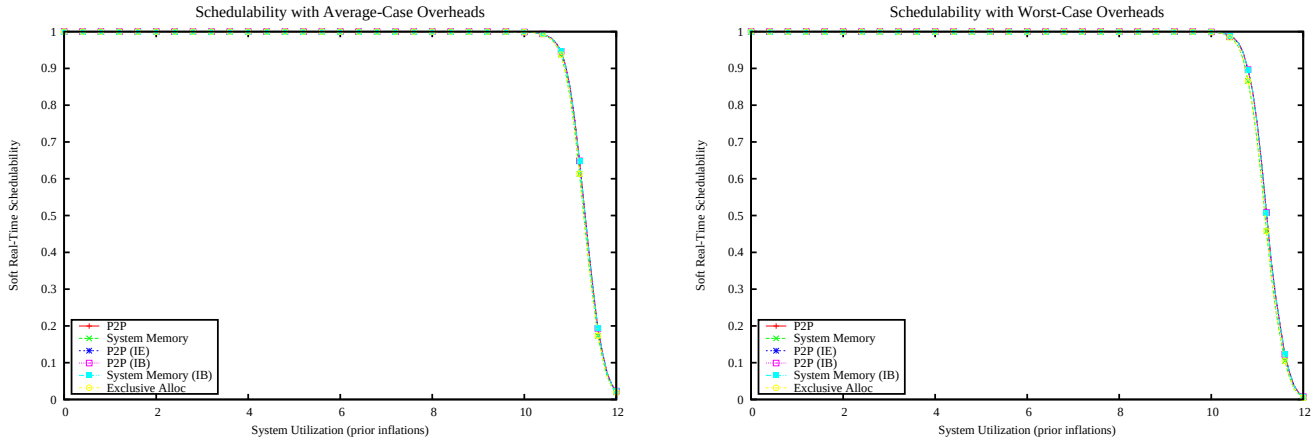

Figure 6630: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

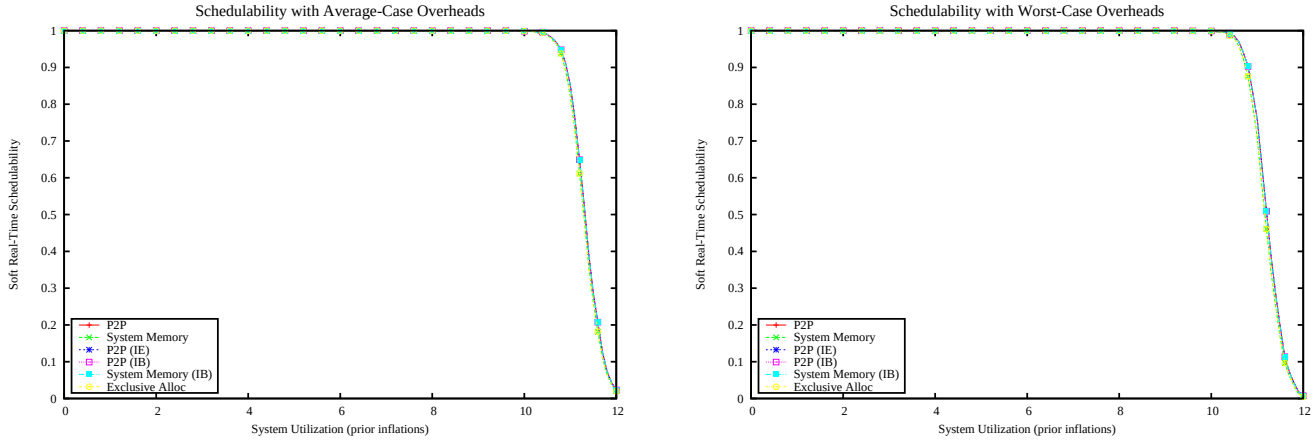

Figure 6631: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

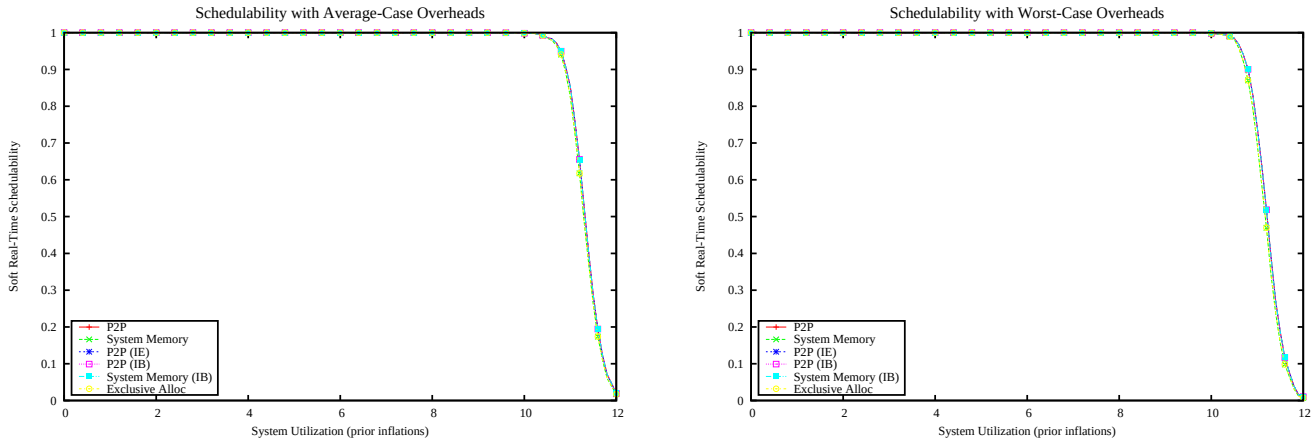

Figure 6632: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

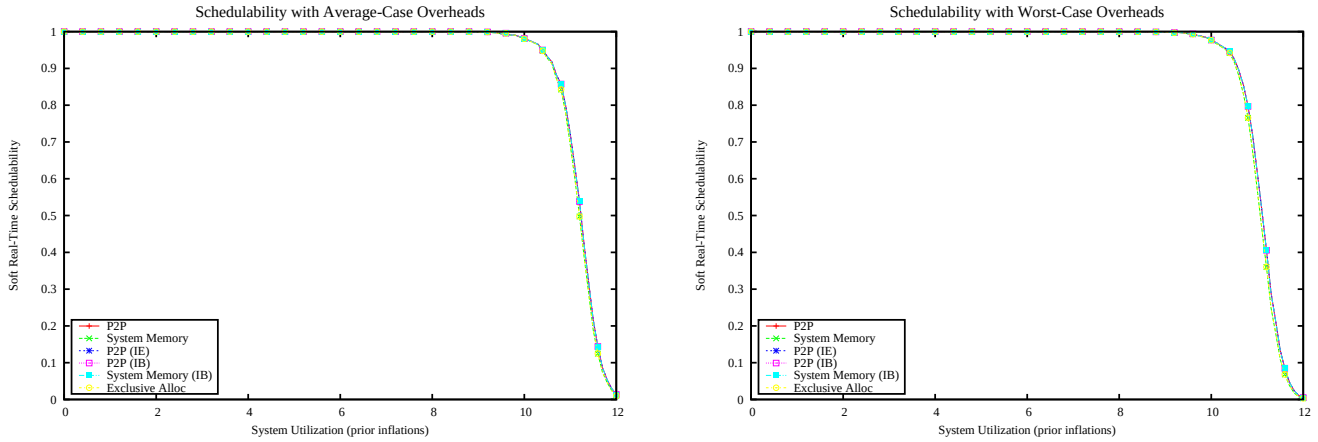

Figure 6633: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

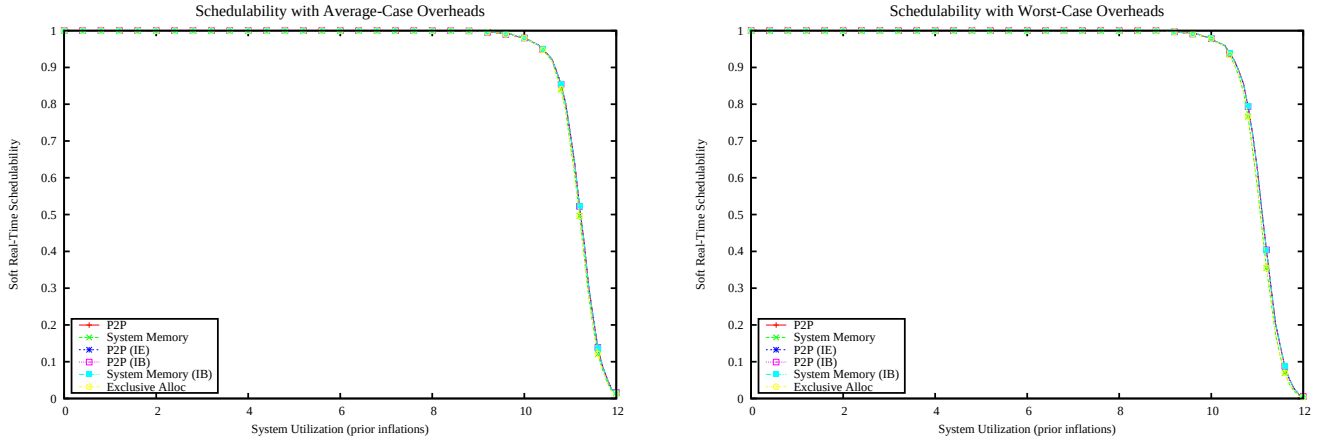

Figure 6634: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

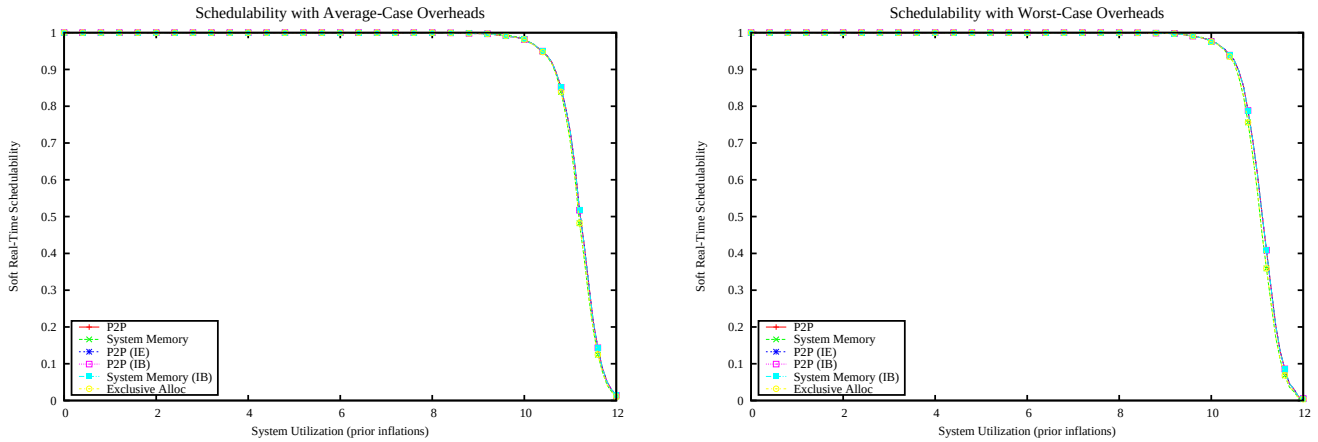

Figure 6635: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

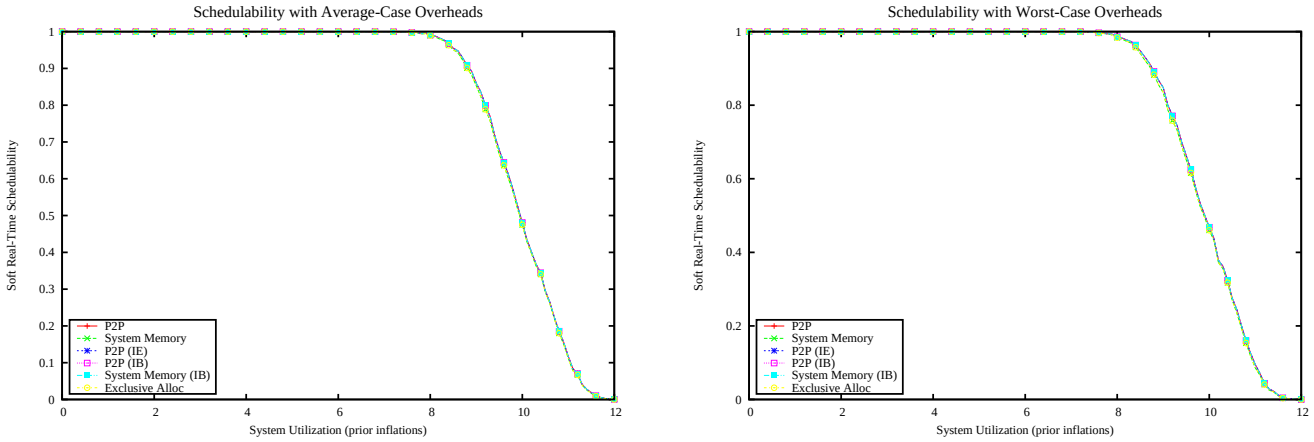

Figure 6636: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

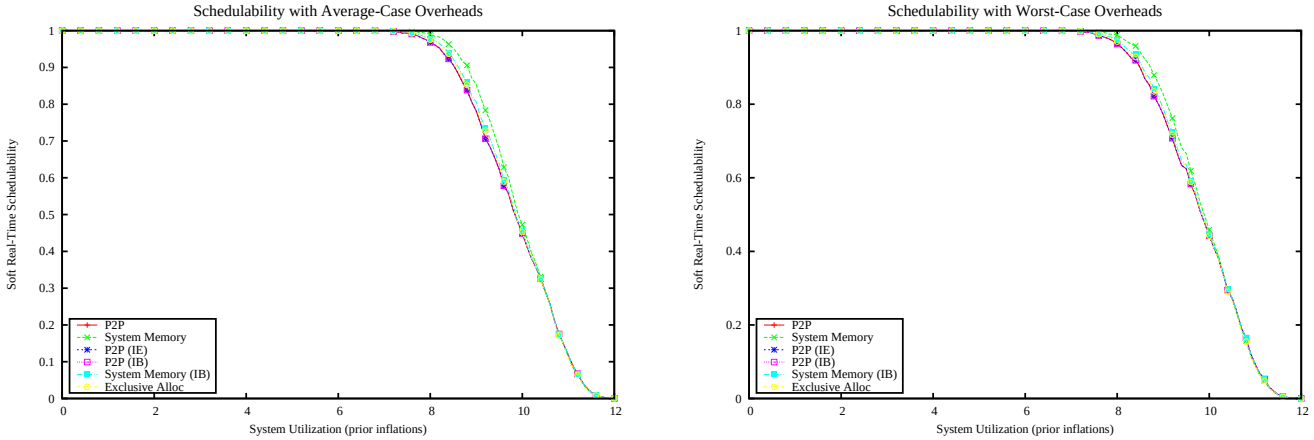

Figure 6637: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

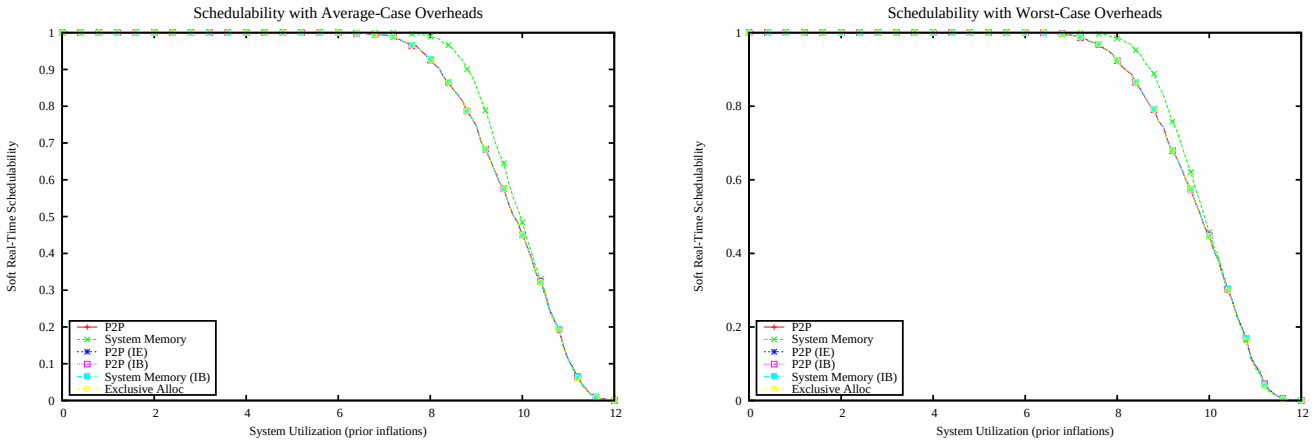

Figure 6638: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

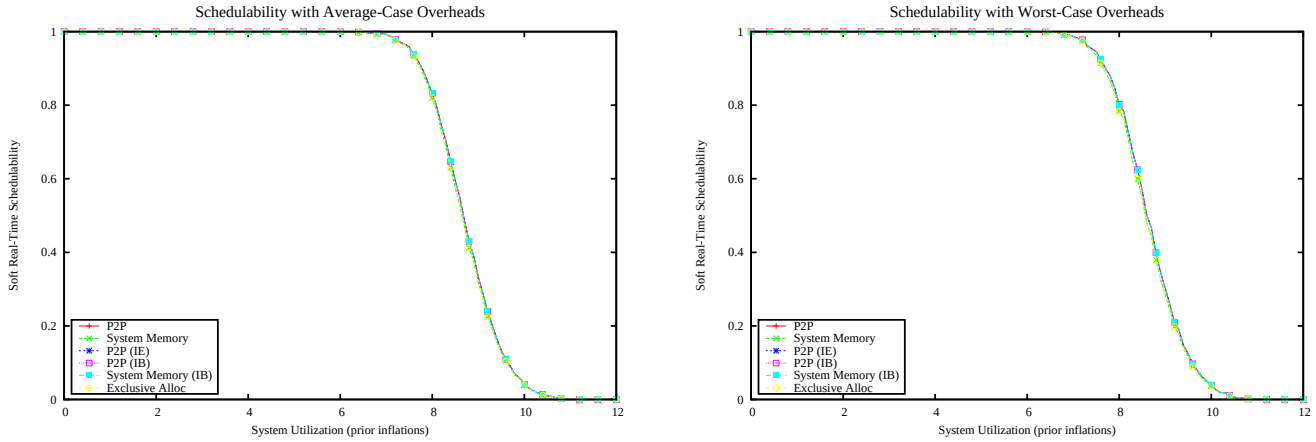

Figure 6639: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

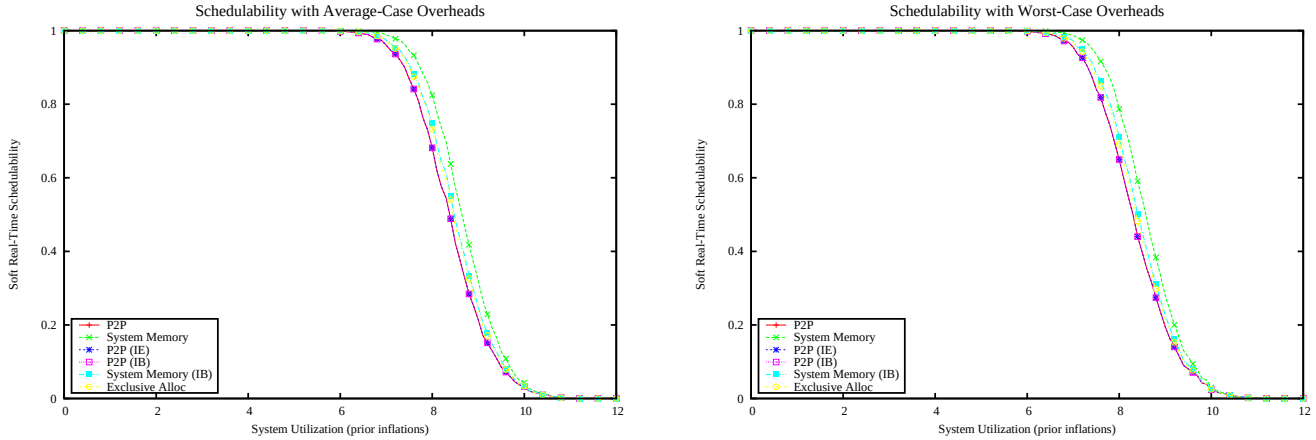

Figure 6640: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

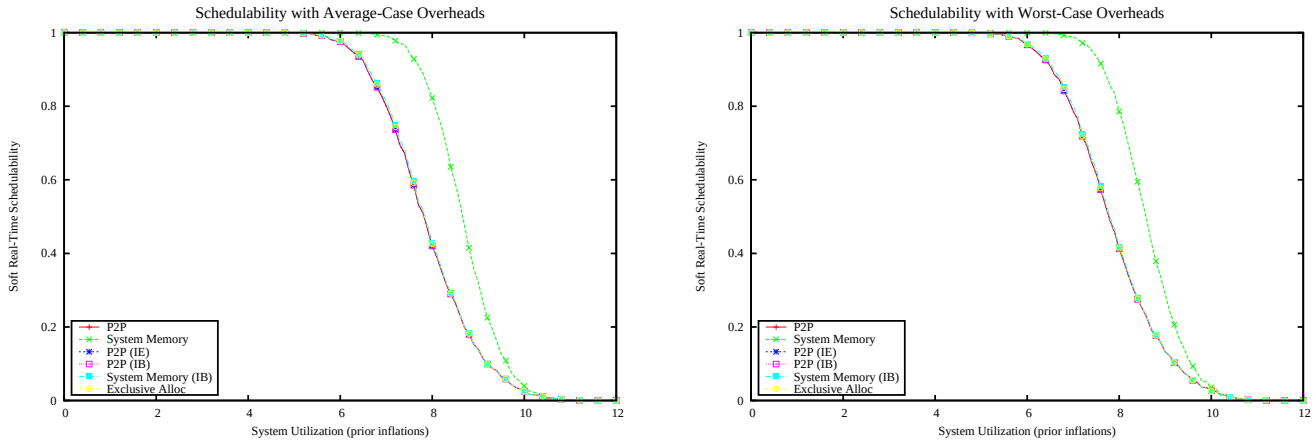

Figure 6641: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

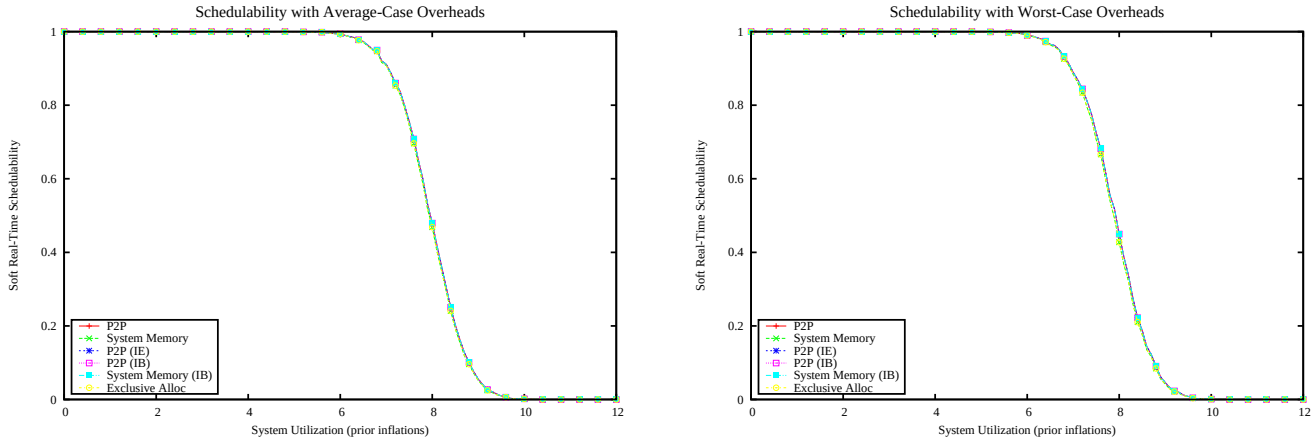

Figure 6642: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

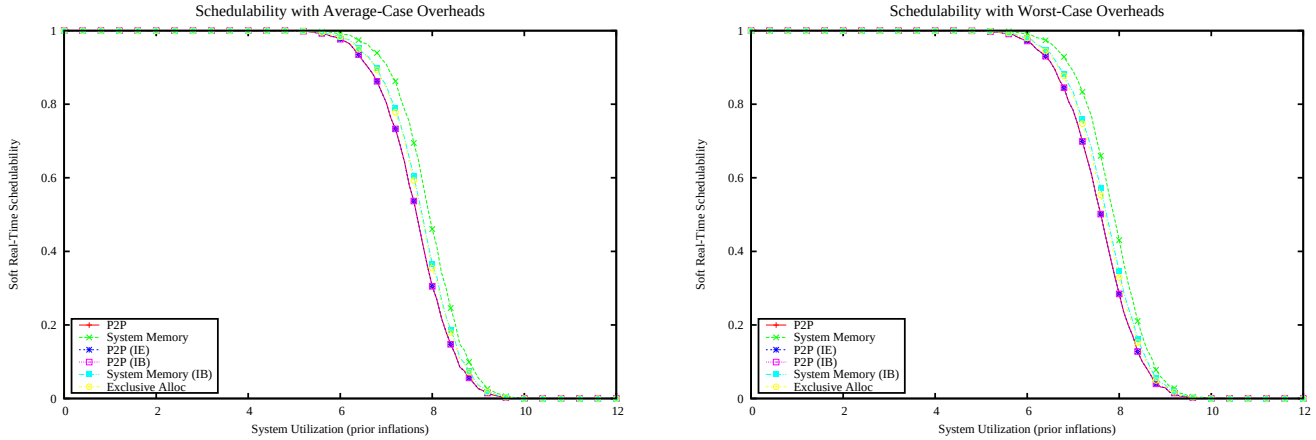

Figure 6643: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

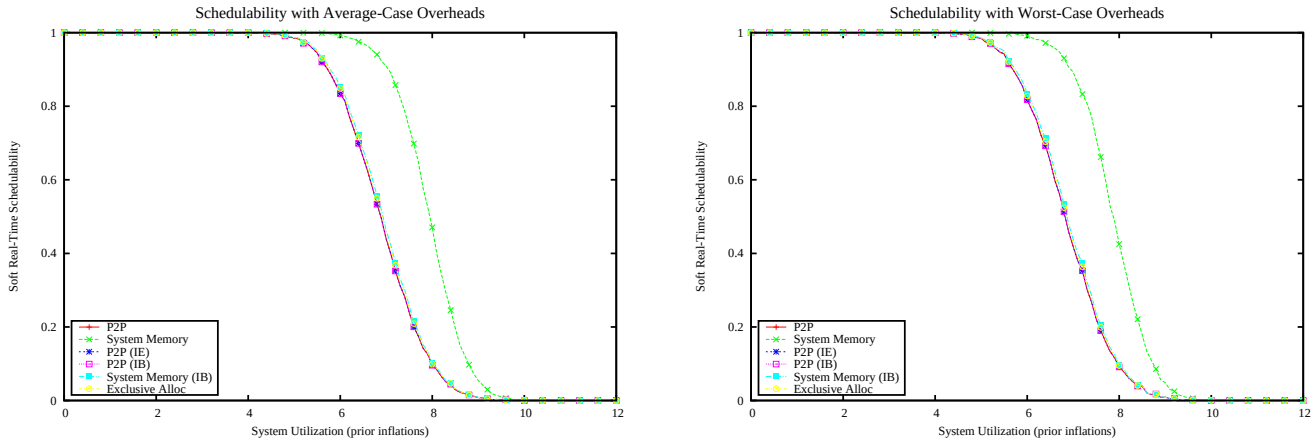

Figure 6644: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

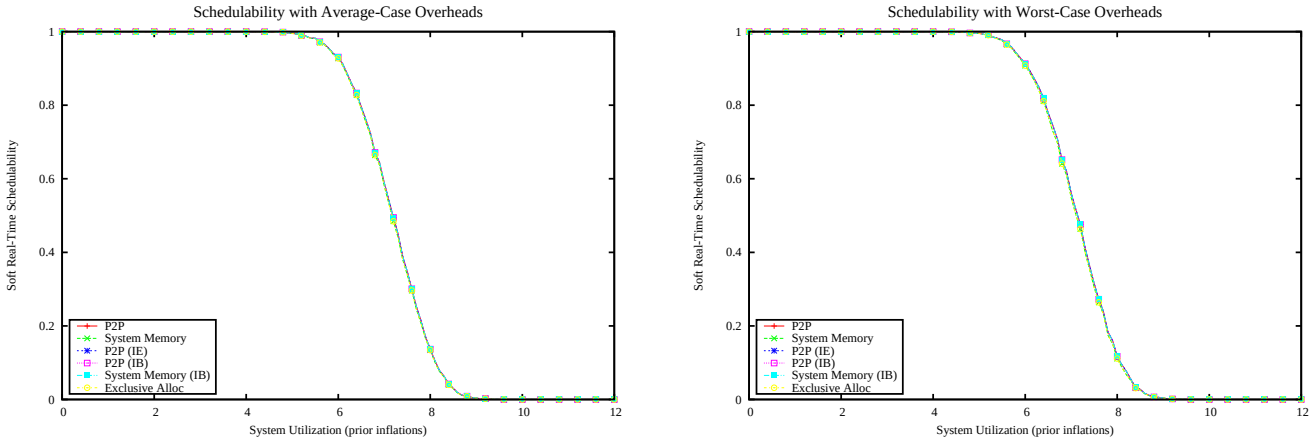

Figure 6645: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

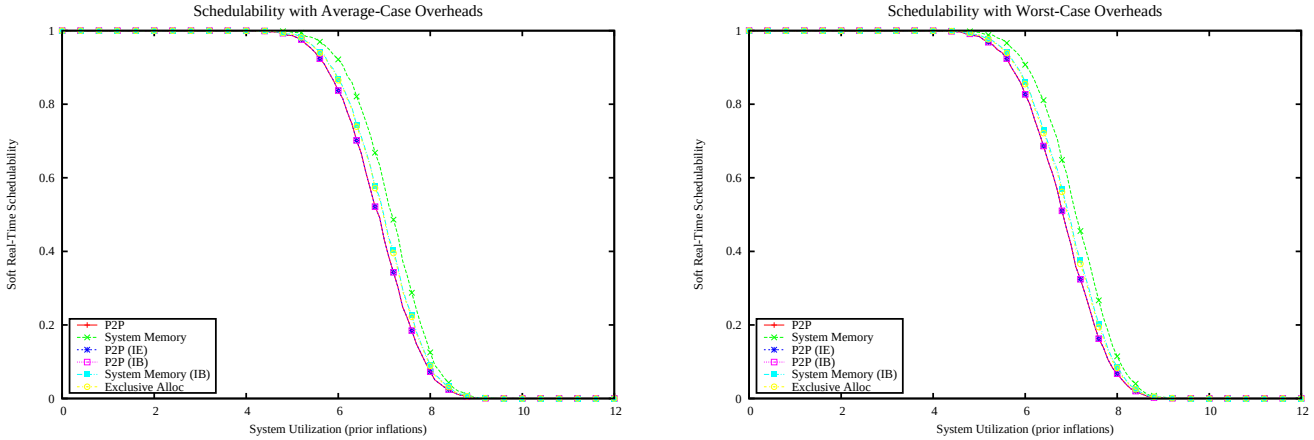

Figure 6646: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

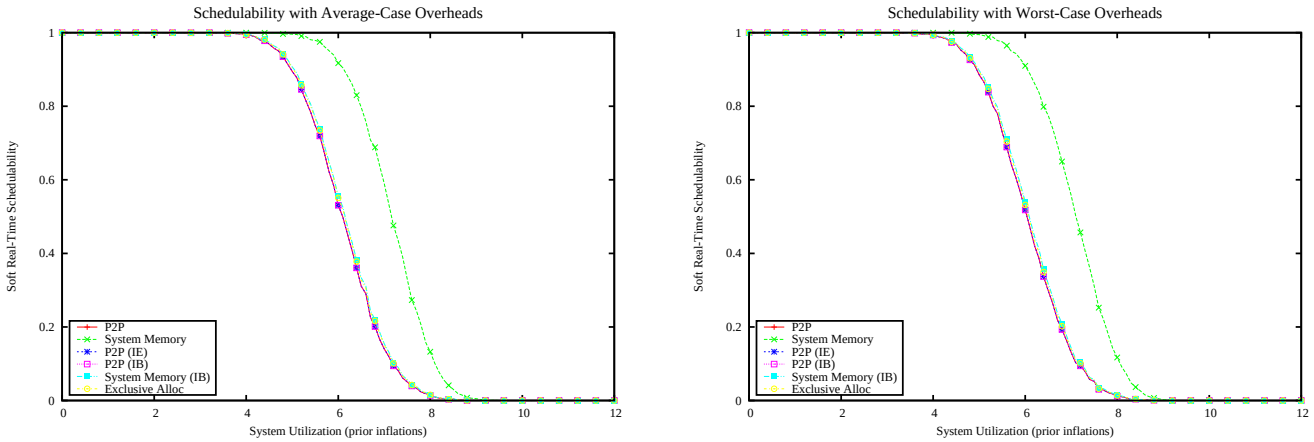

Figure 6647: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

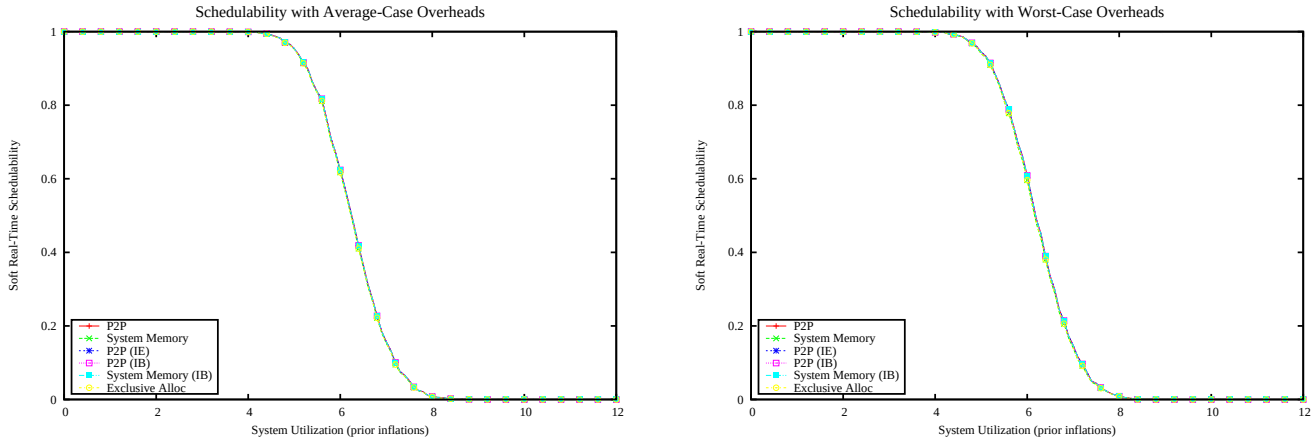

Figure 6648: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

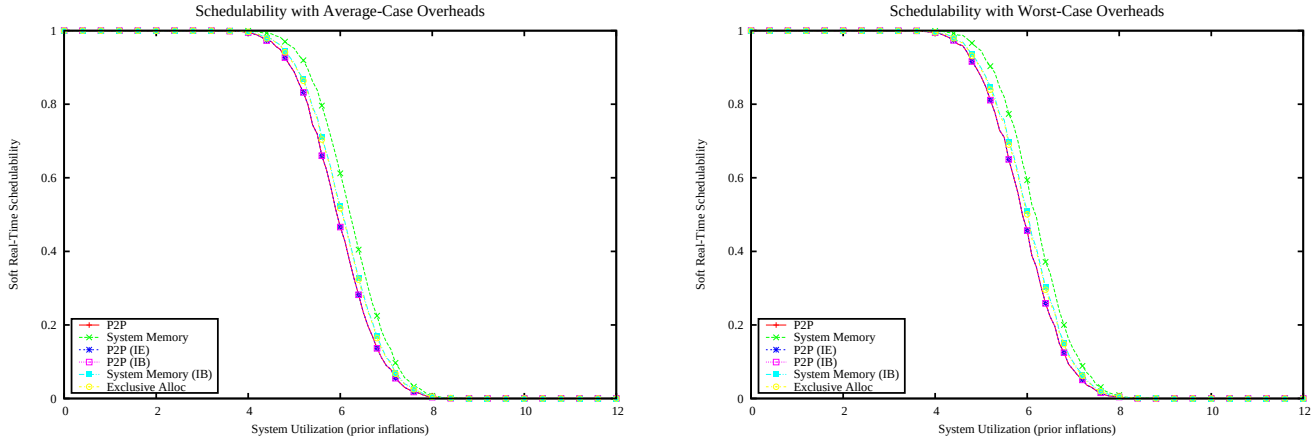

Figure 6649: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

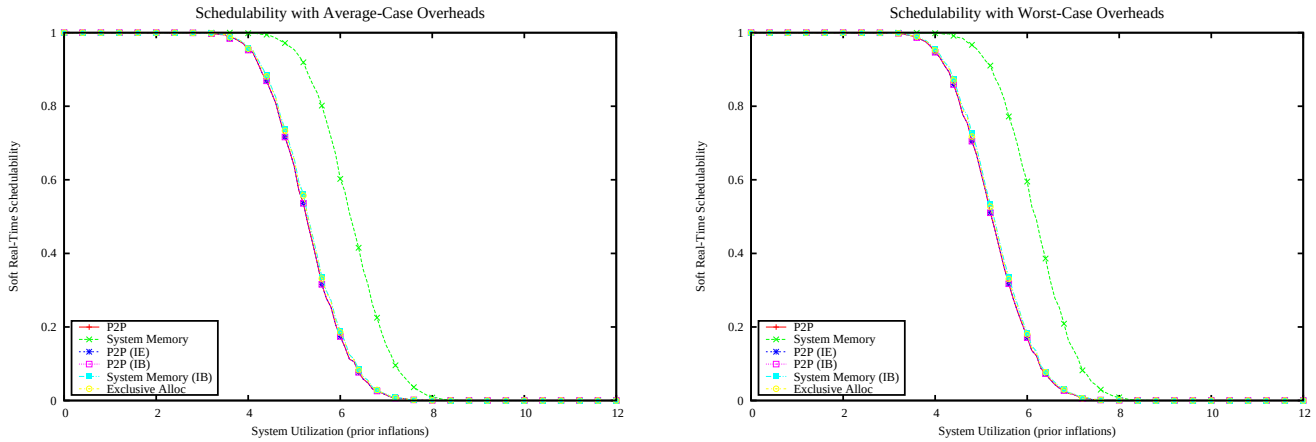

Figure 6650: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

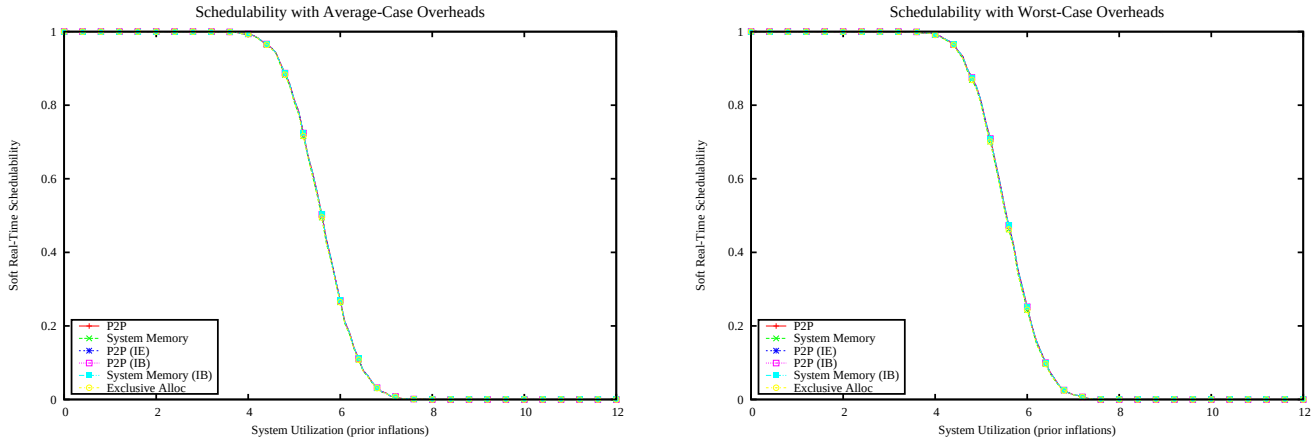

Figure 6651: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

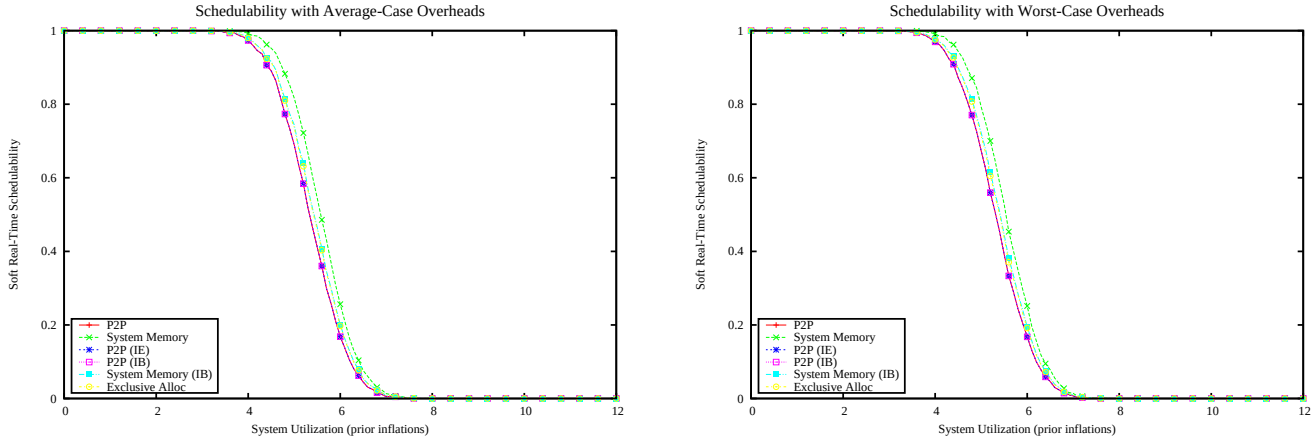

Figure 6652: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

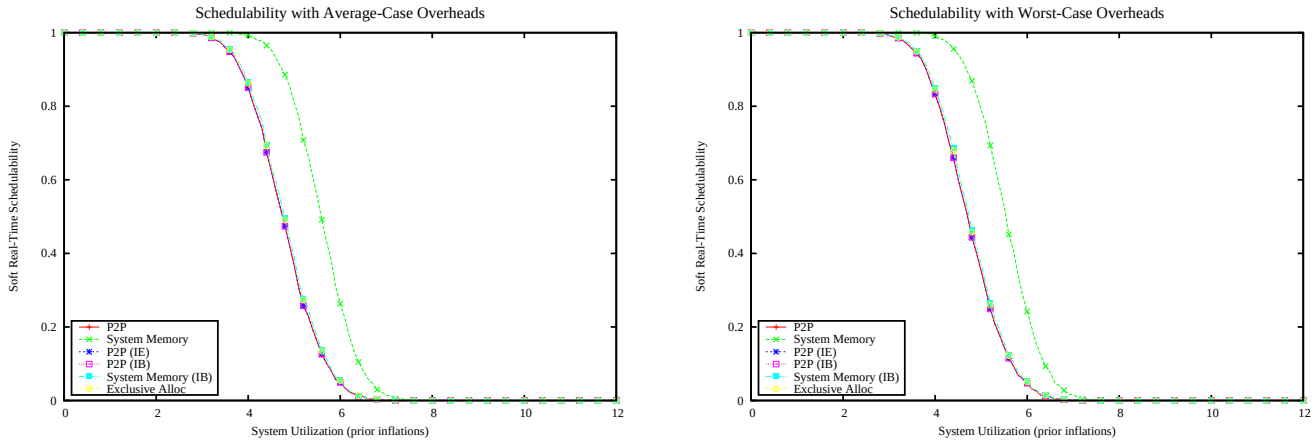

Figure 6653: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

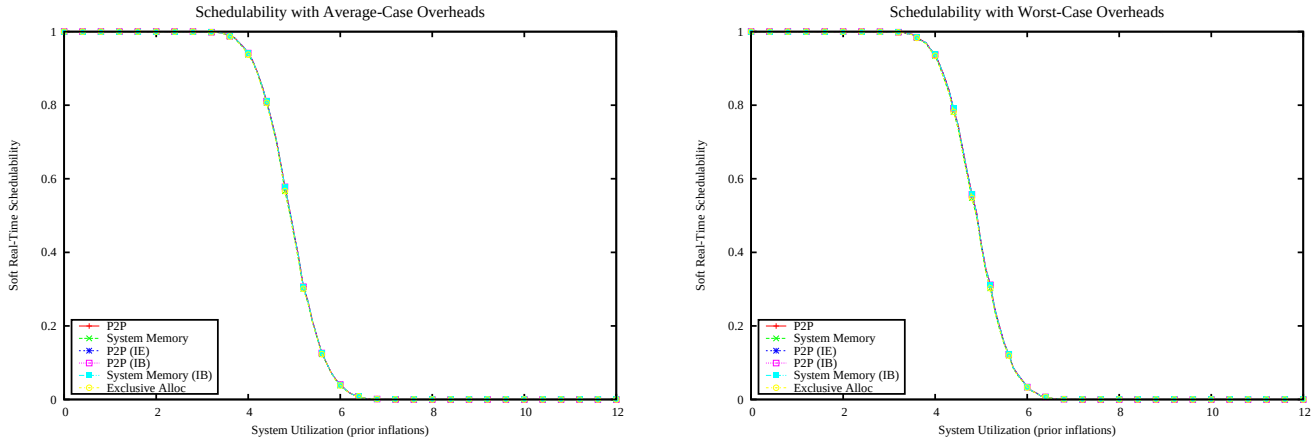

Figure 6654: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

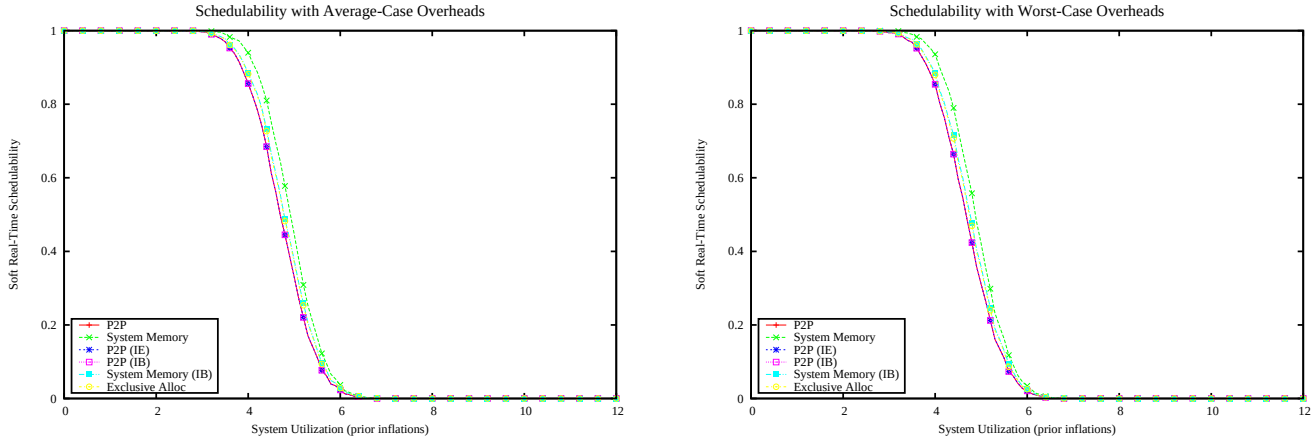

Figure 6655: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

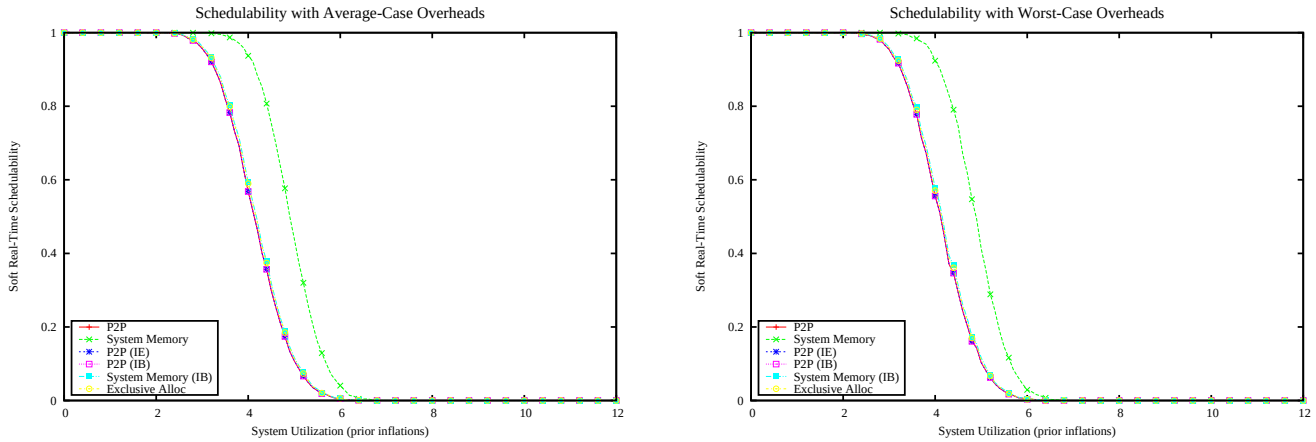

Figure 6656: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

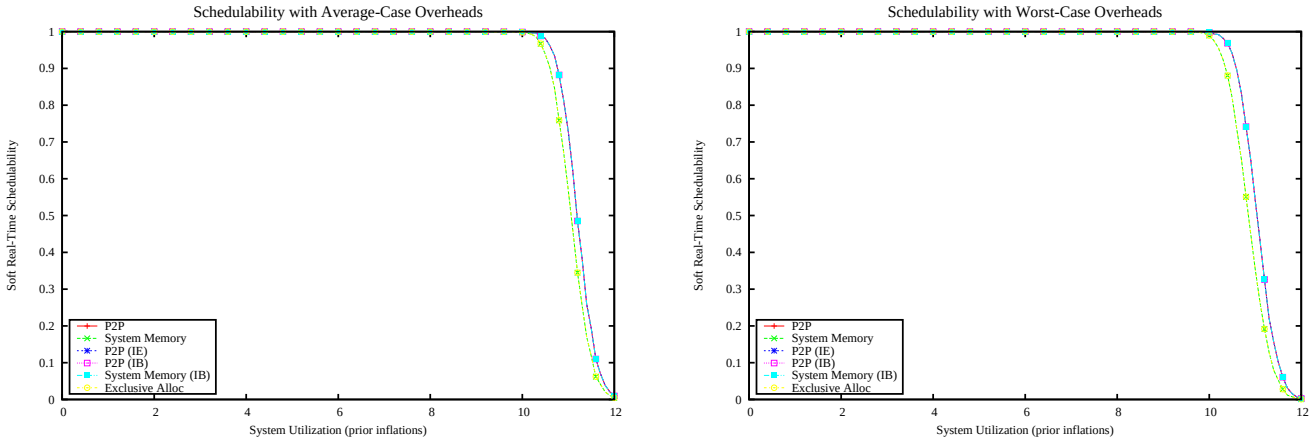

Figure 6657: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

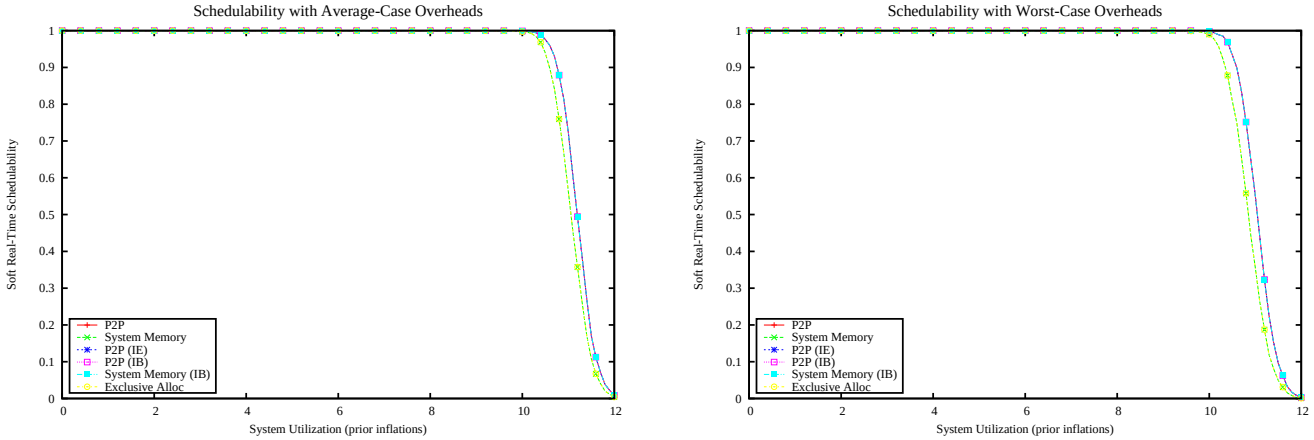

Figure 6658: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

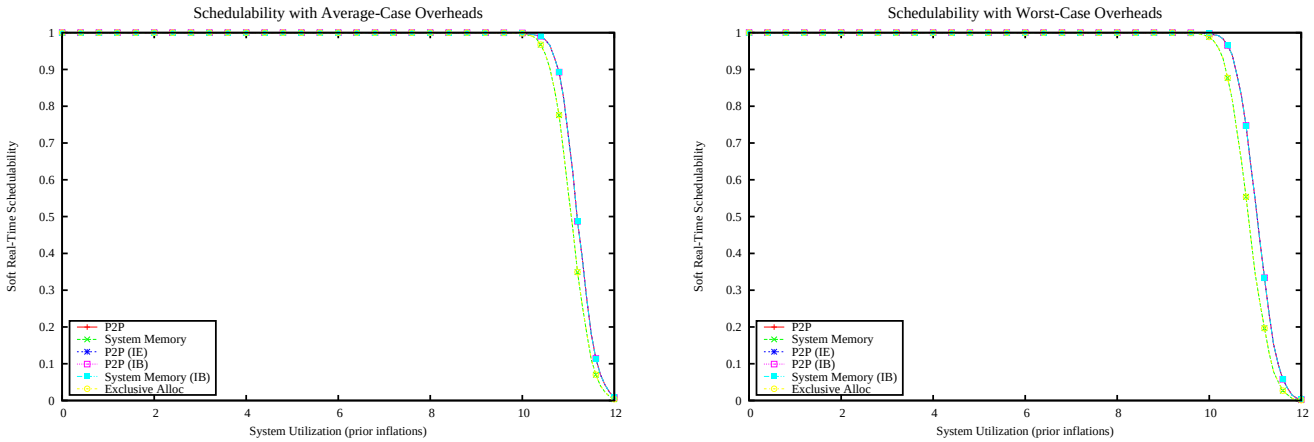

Figure 6659: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

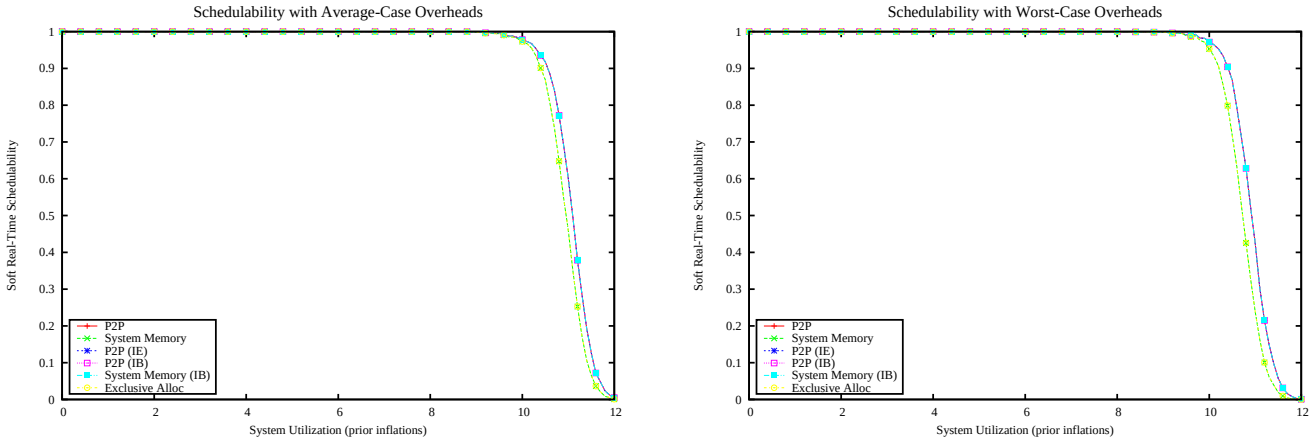

Figure 6660: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

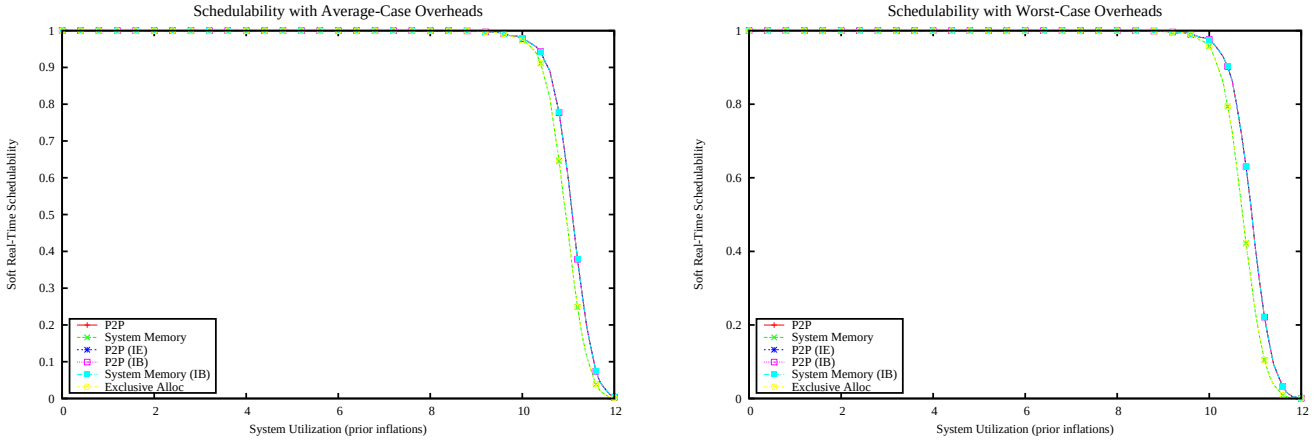

Figure 6661: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

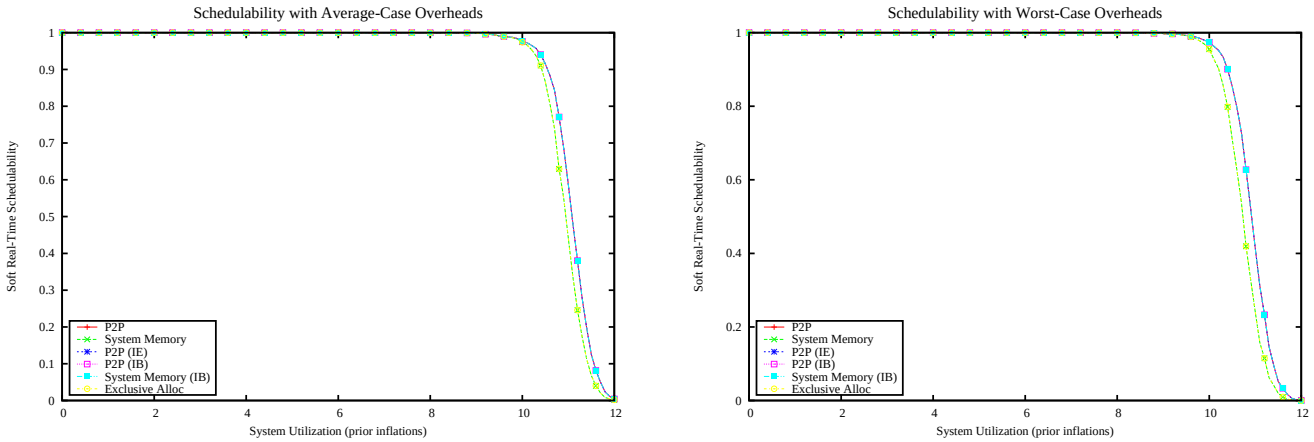

Figure 6662: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

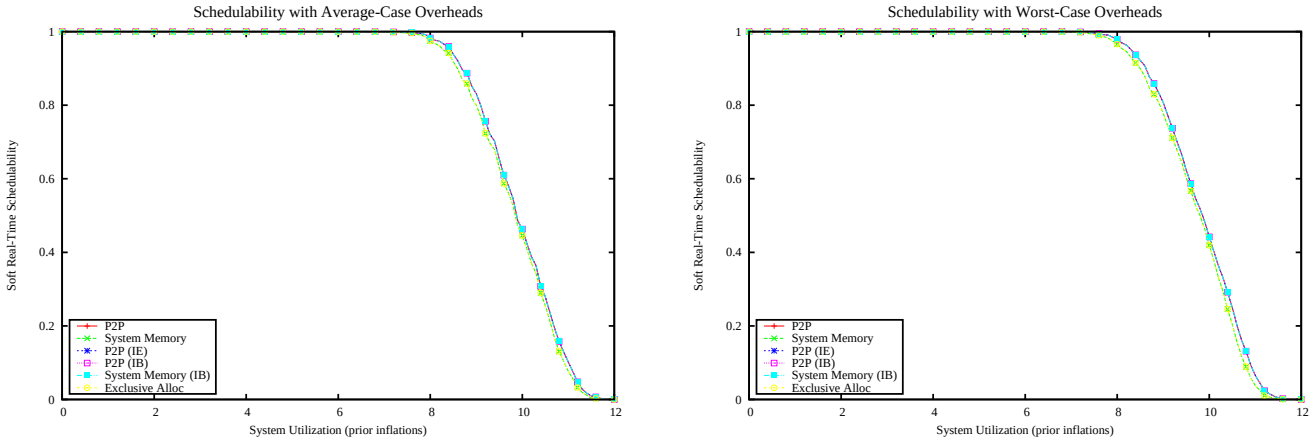

Figure 6663: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

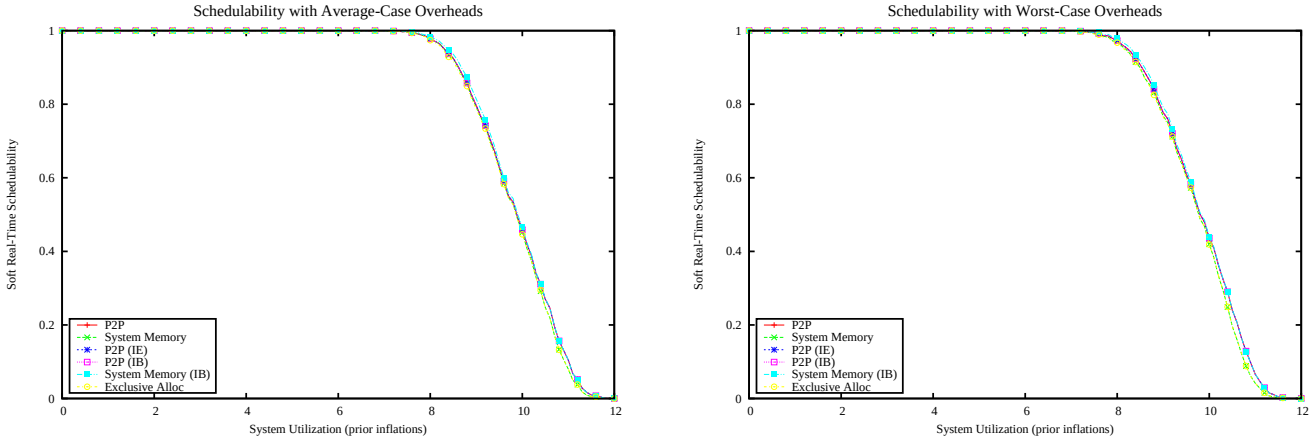

Figure 6664: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

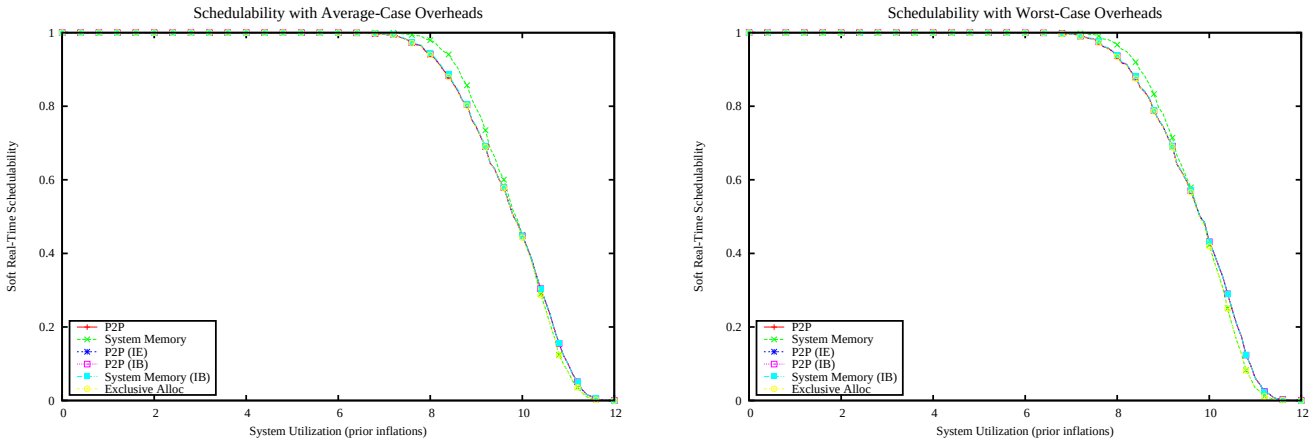

Figure 6665: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

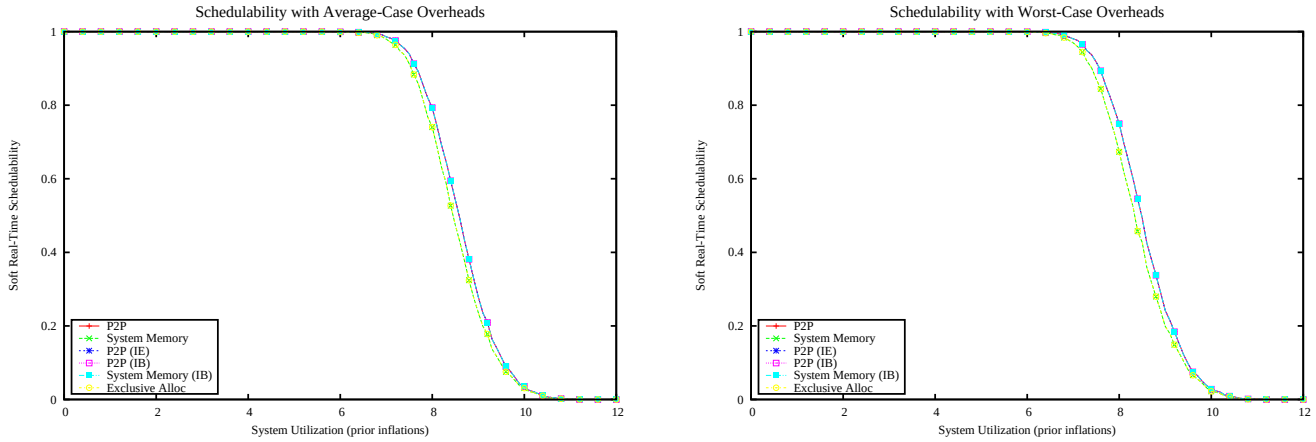

Figure 6666: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

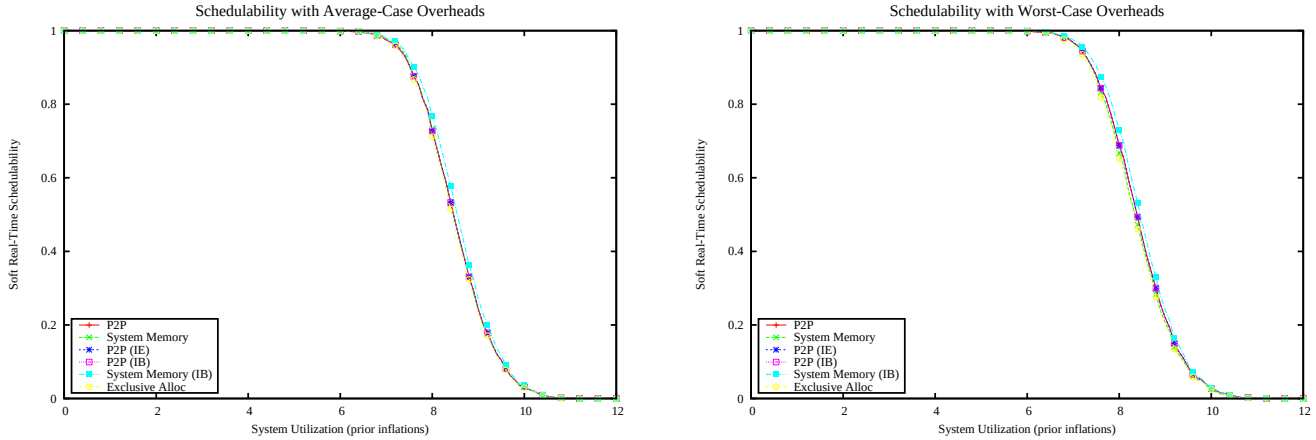

Figure 6667: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

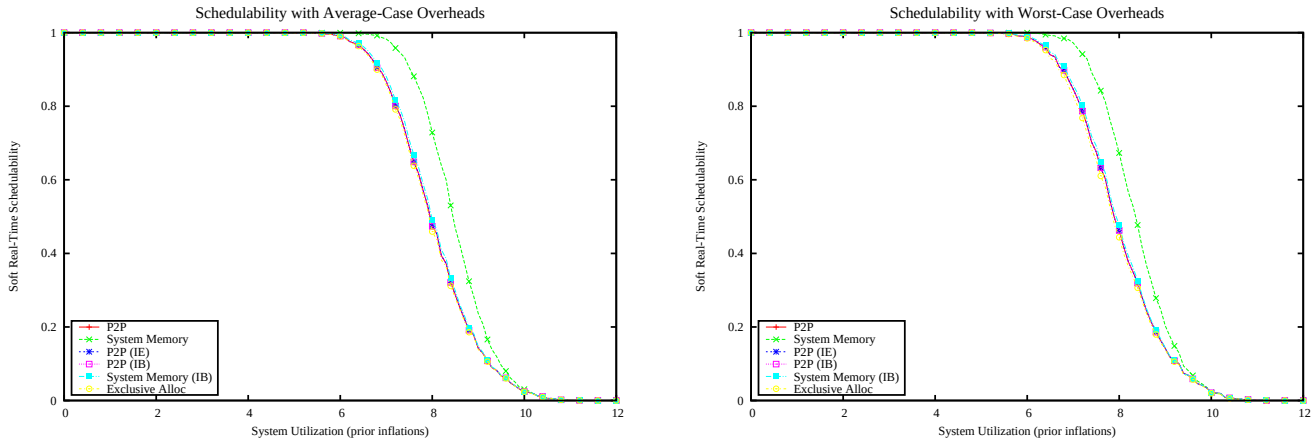

Figure 6668: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

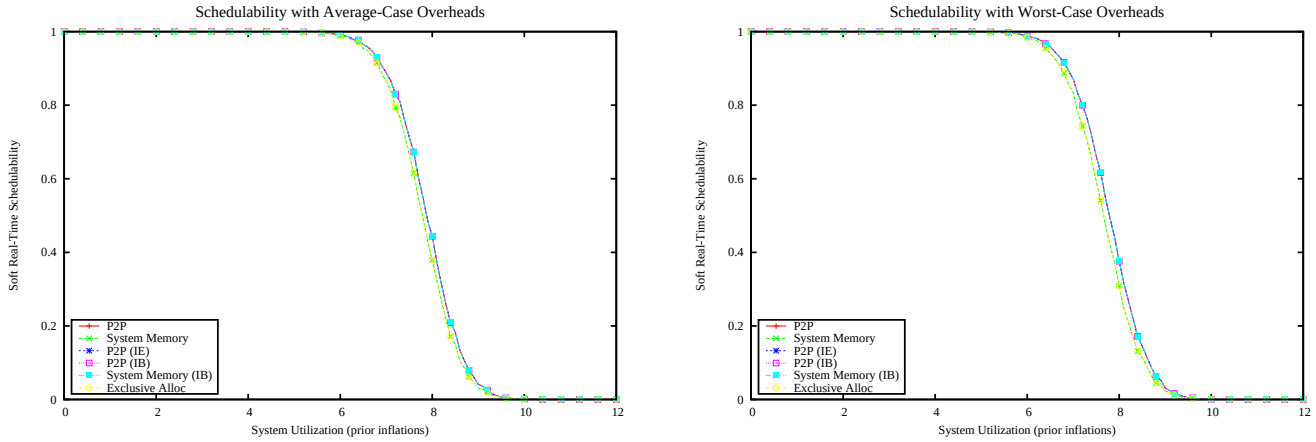

Figure 6669: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

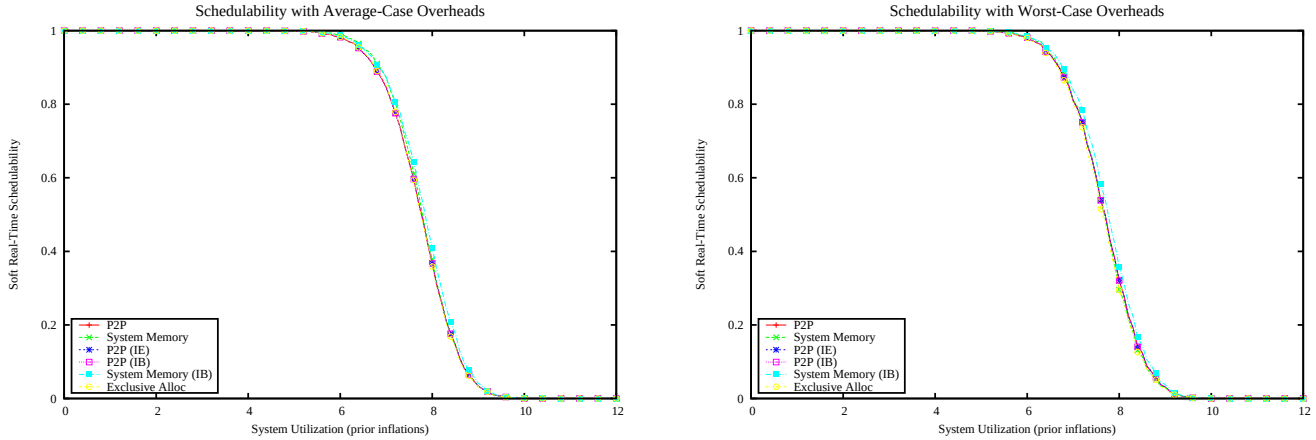

Figure 6670: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

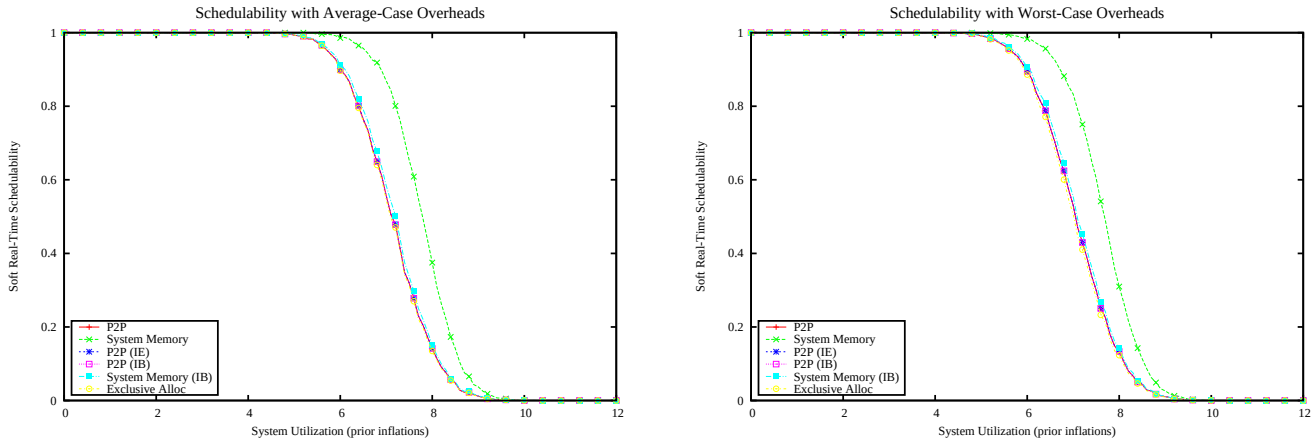

Figure 6671: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

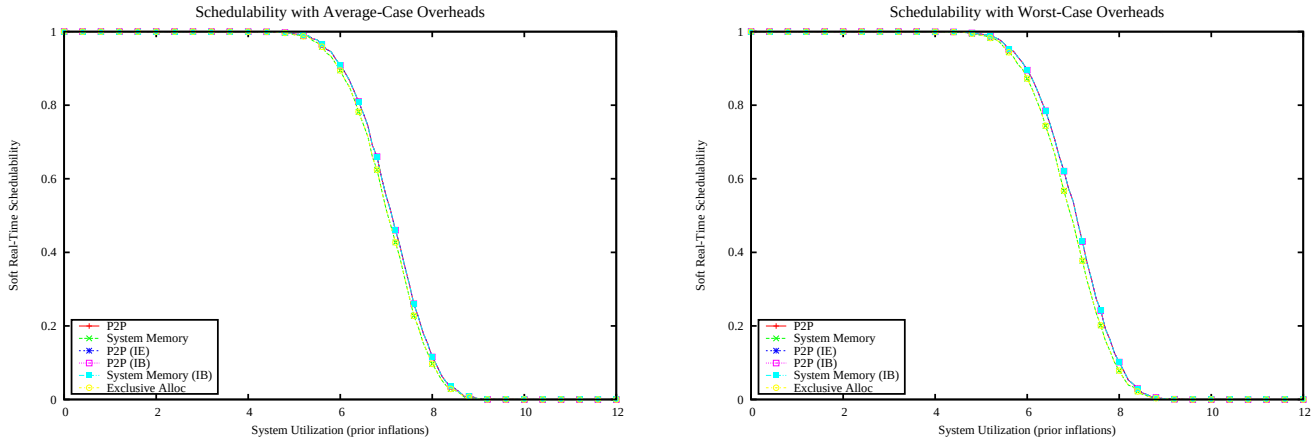

Figure 6672: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

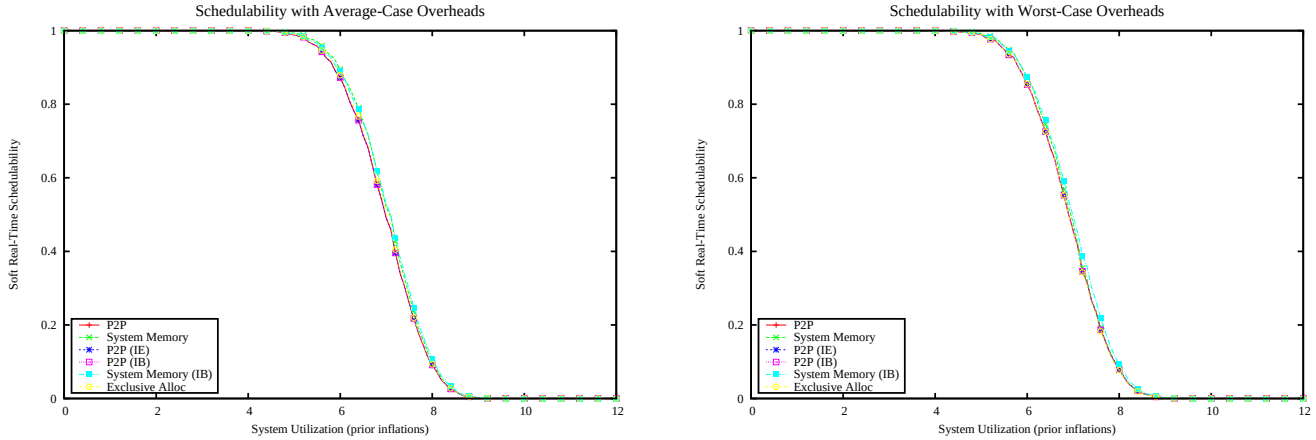

Figure 6673: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

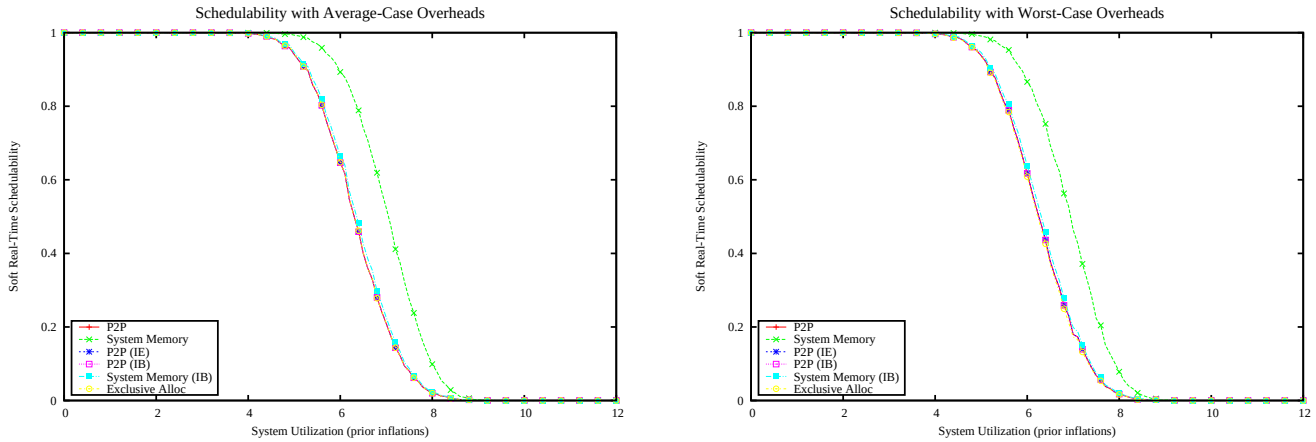

Figure 6674: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

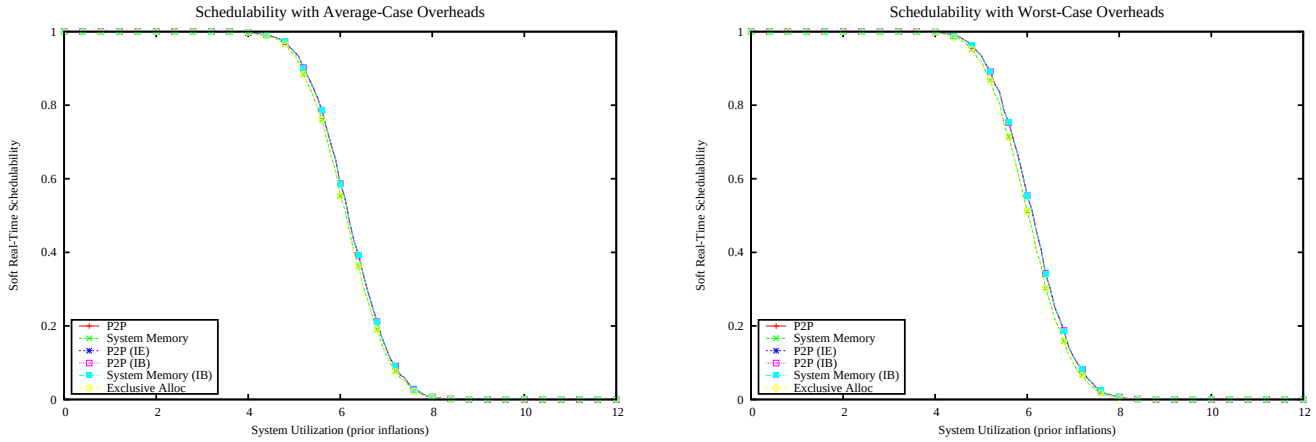

Figure 6675: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

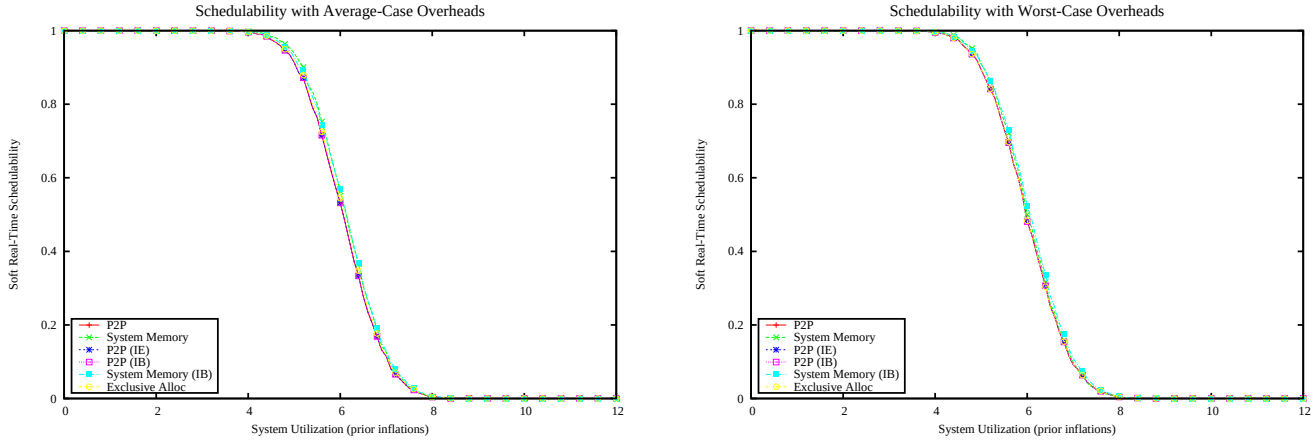

Figure 6676: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

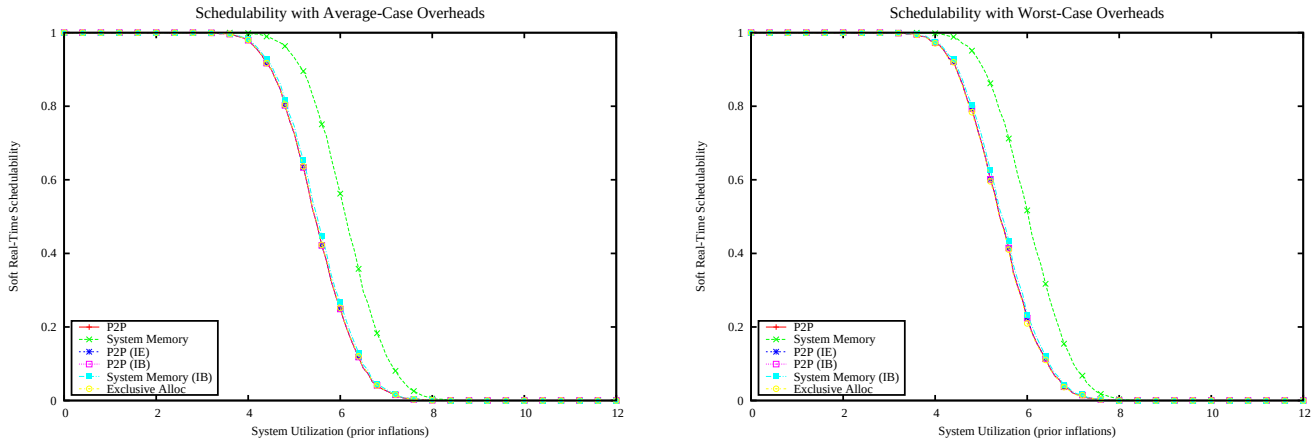

Figure 6677: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

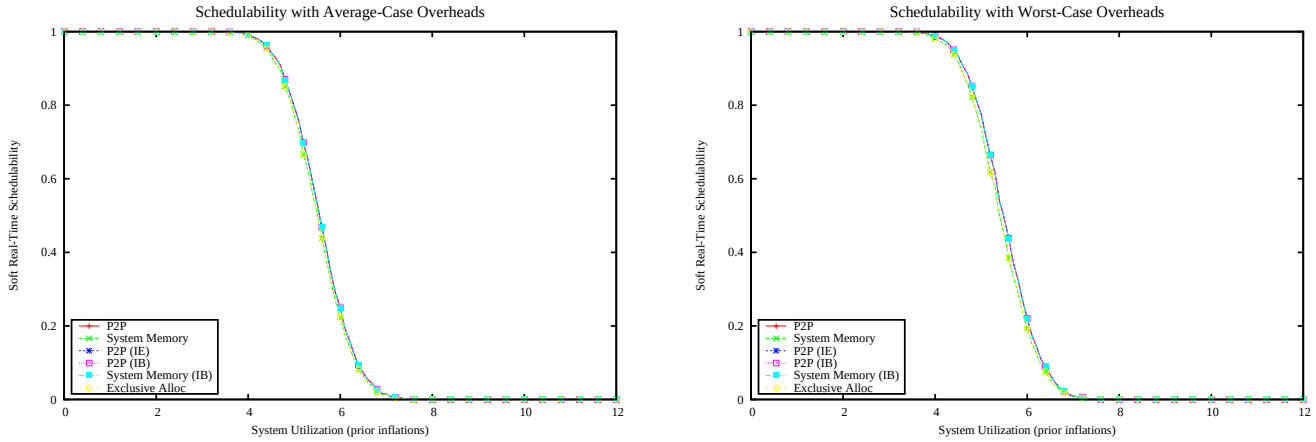

Figure 6678: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

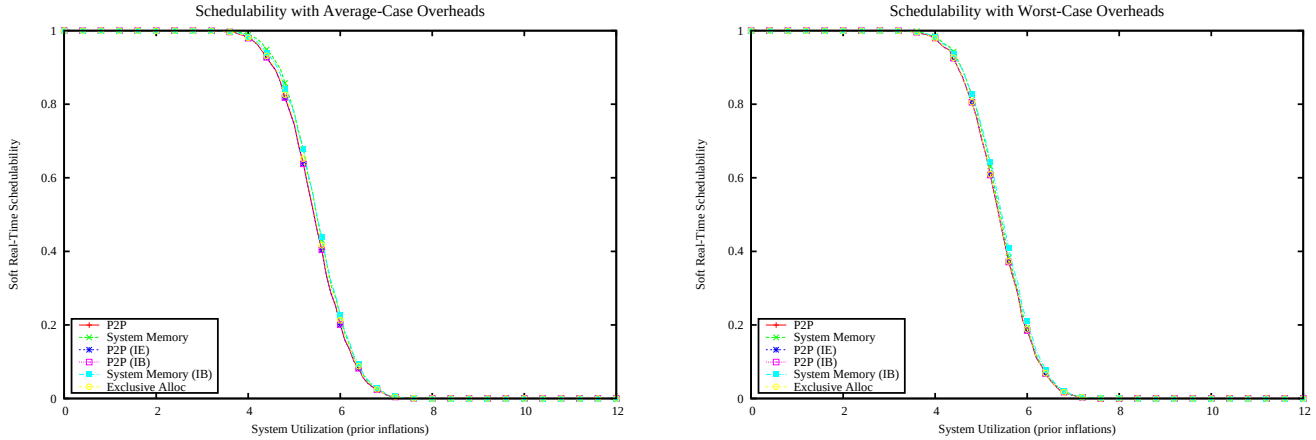

Figure 6679: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

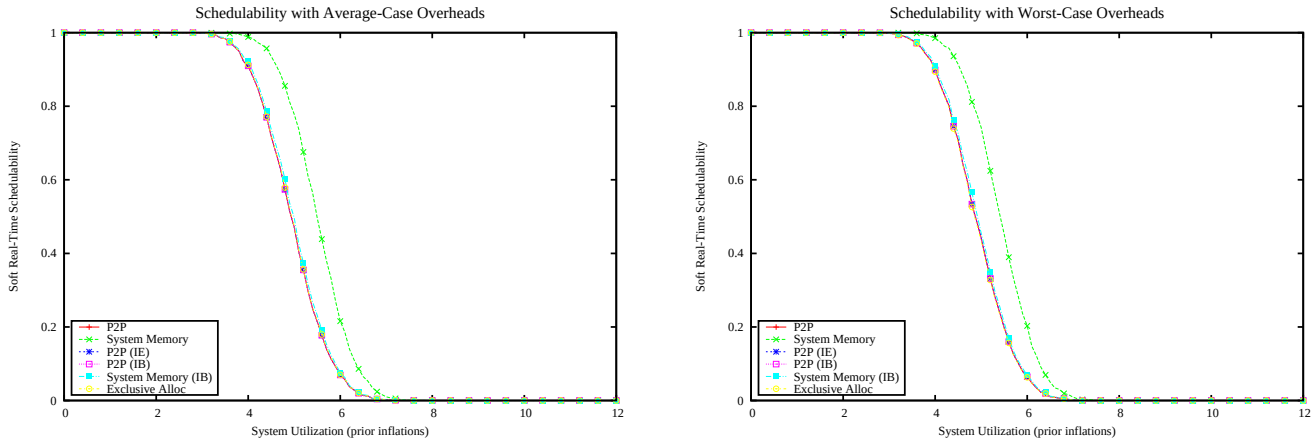

Figure 6680: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

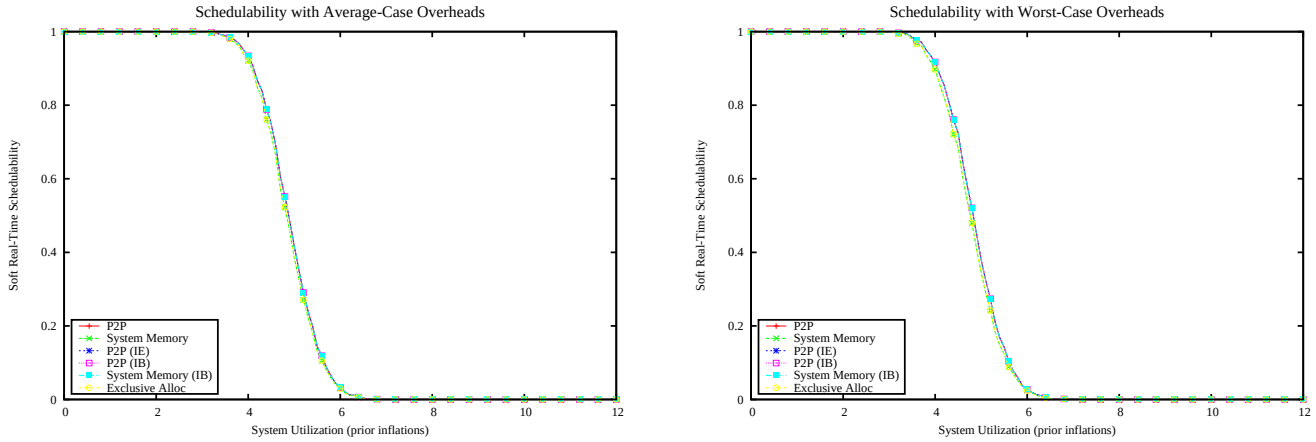

Figure 6681: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

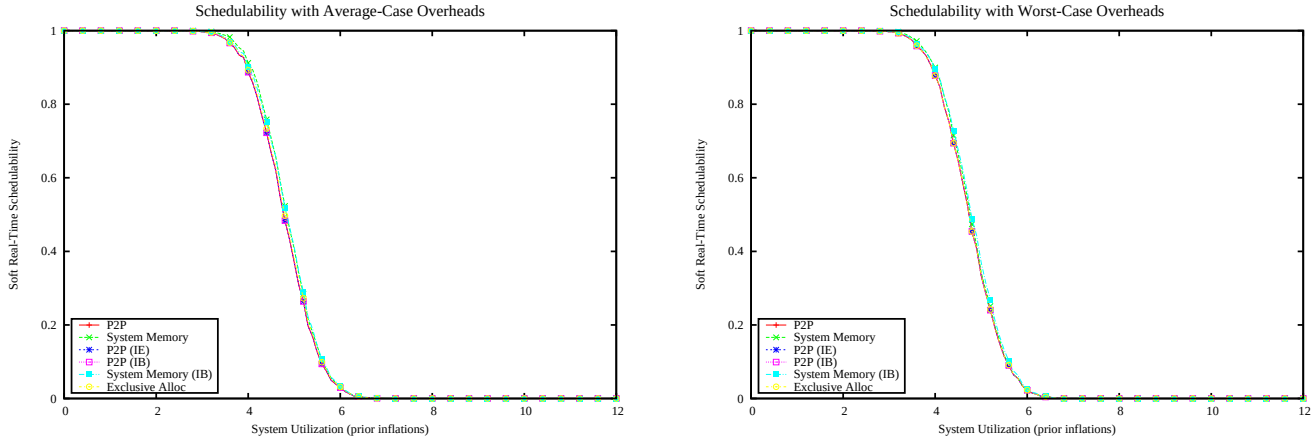

Figure 6682: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

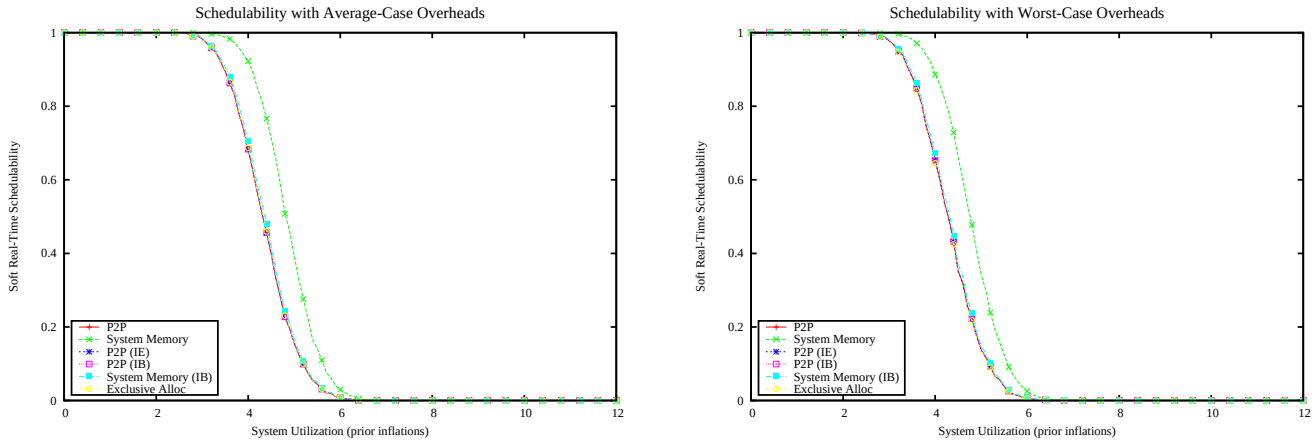

Figure 6683: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

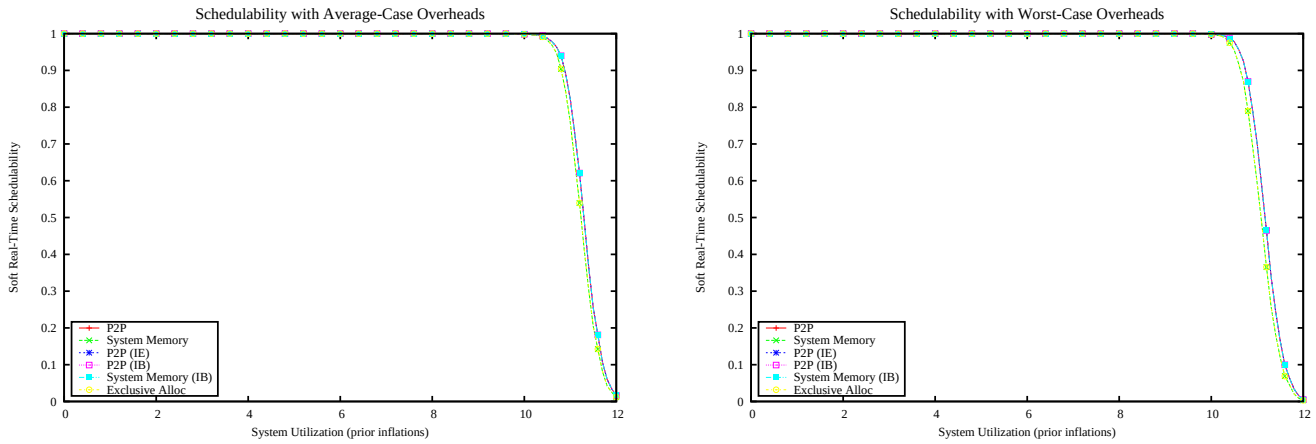

Figure 6684: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

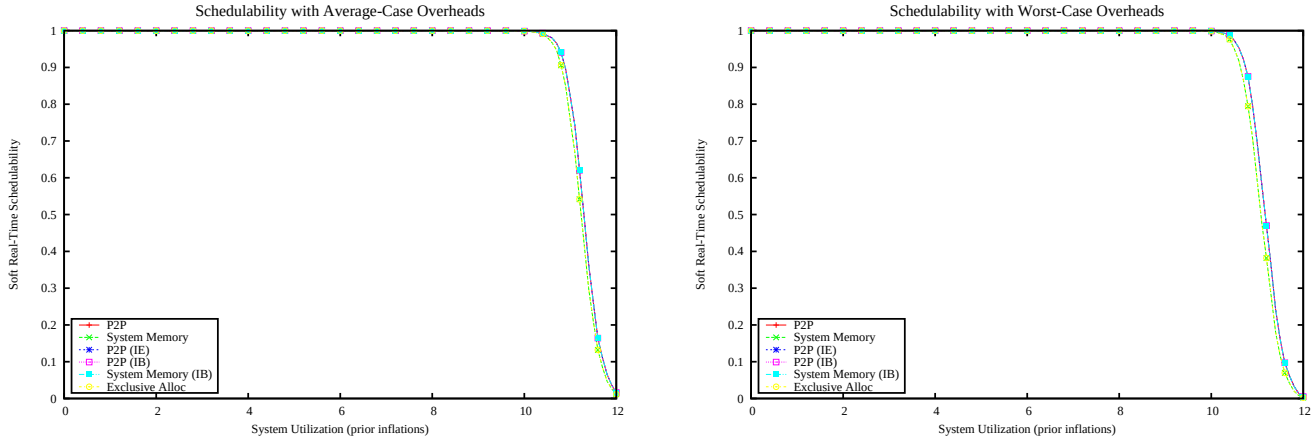

Figure 6685: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

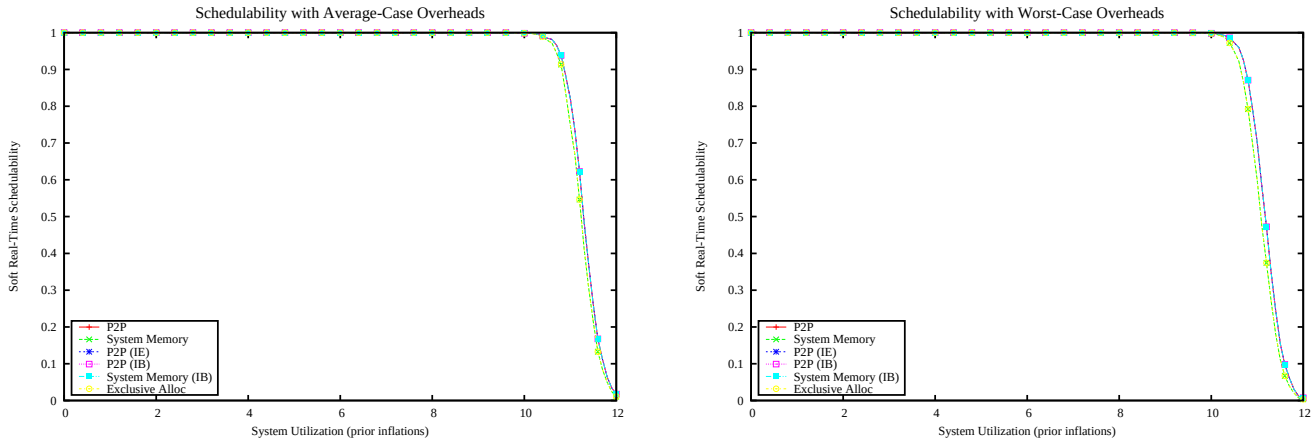

Figure 6686: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

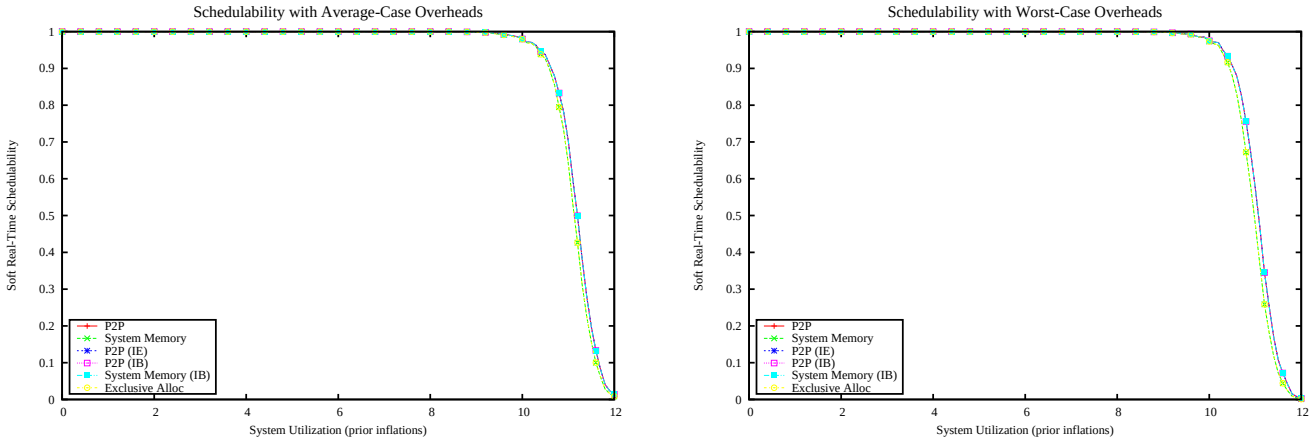

Figure 6687: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

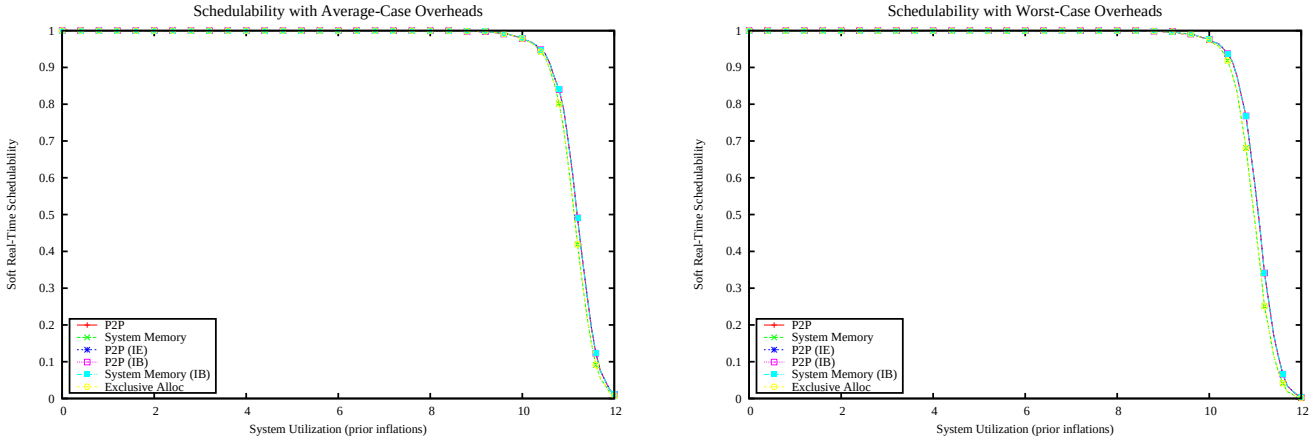

Figure 6688: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

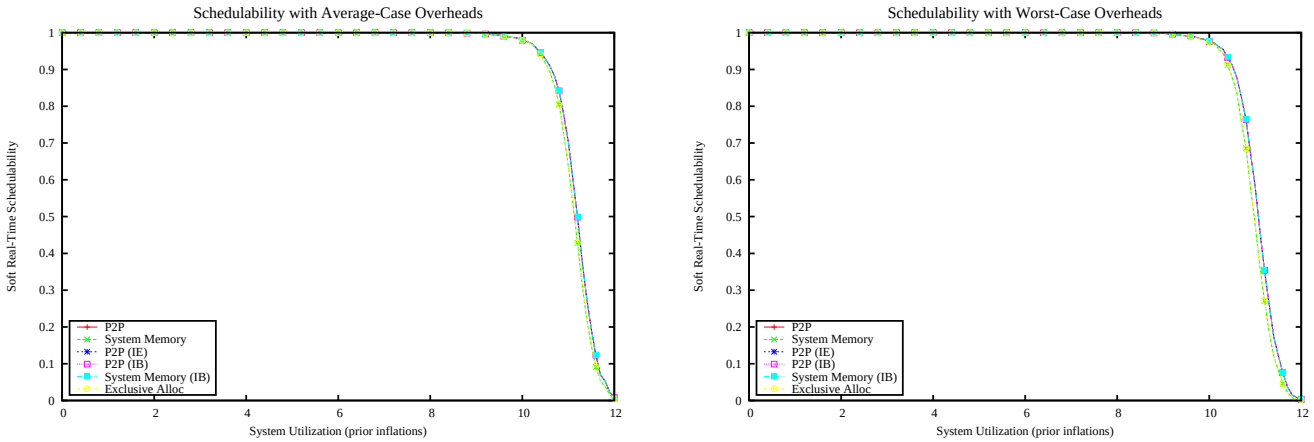

Figure 6689: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

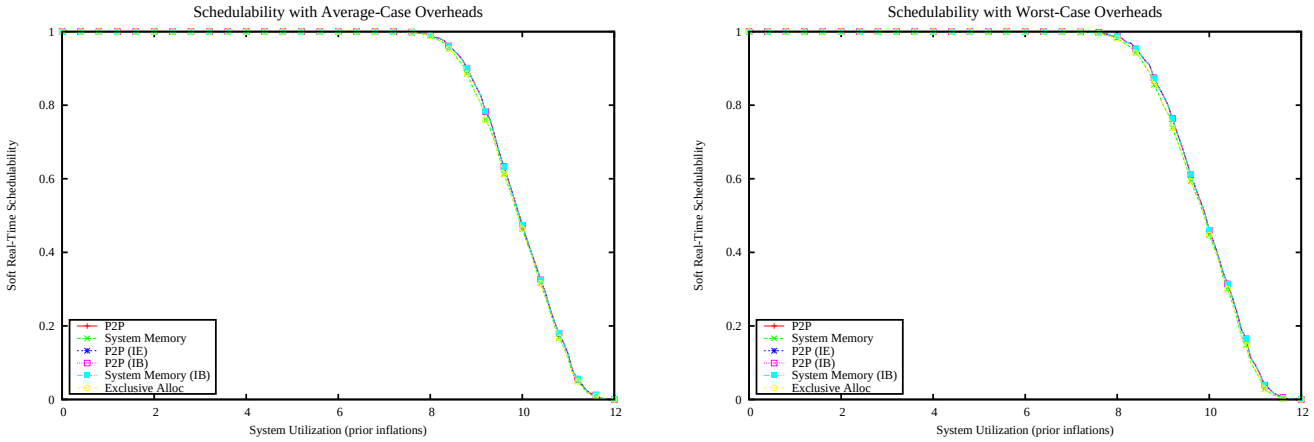

Figure 6690: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

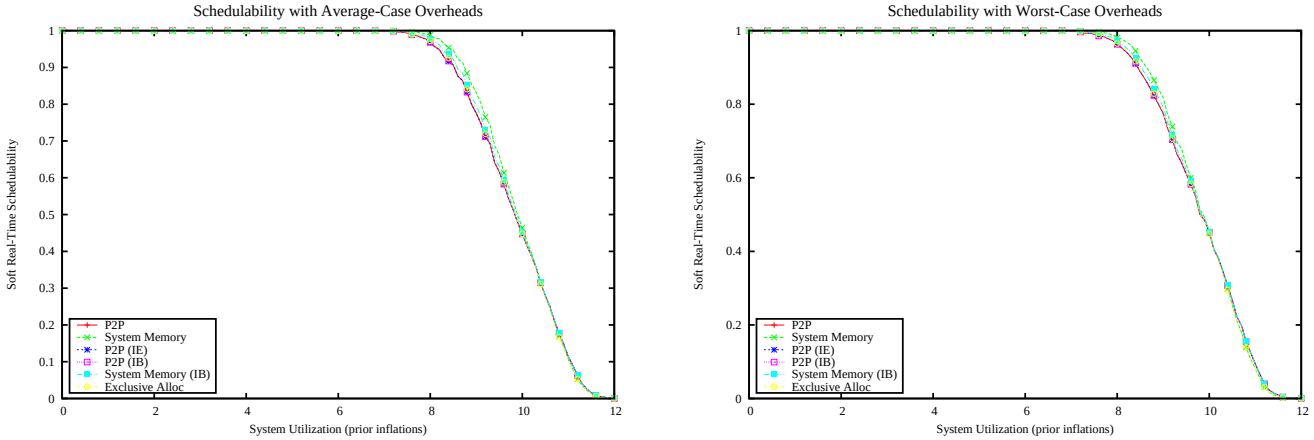

Figure 6691: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

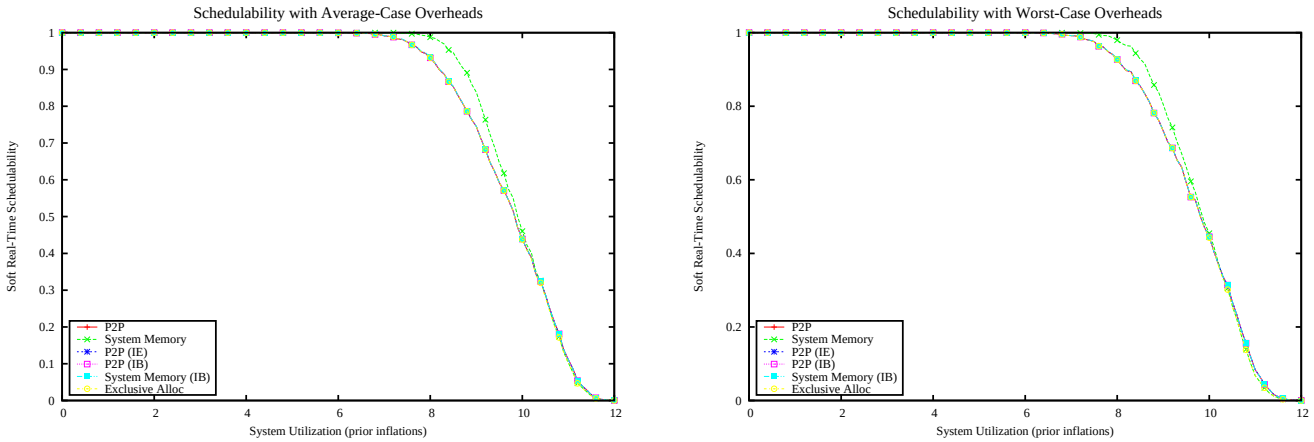

Figure 6692: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

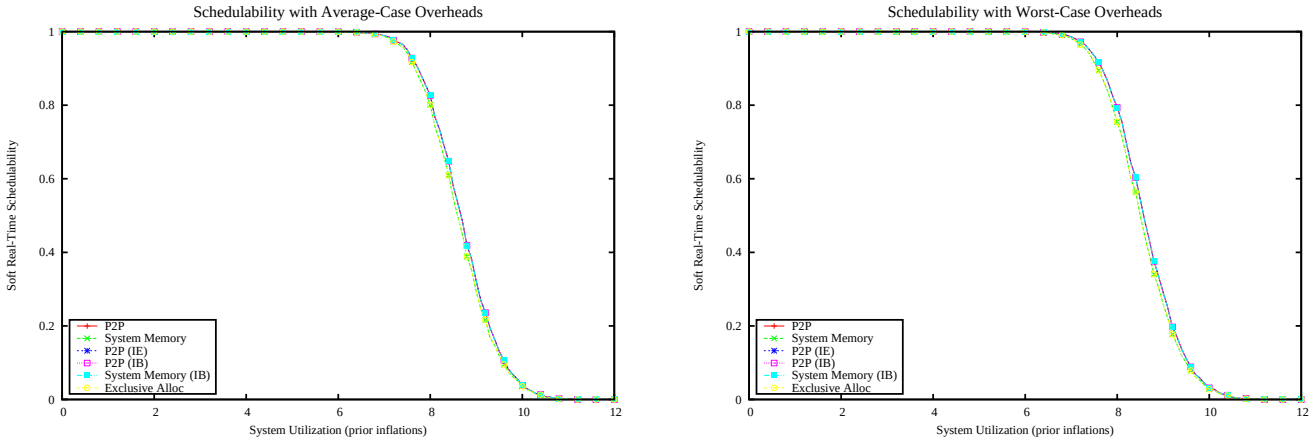

Figure 6693: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

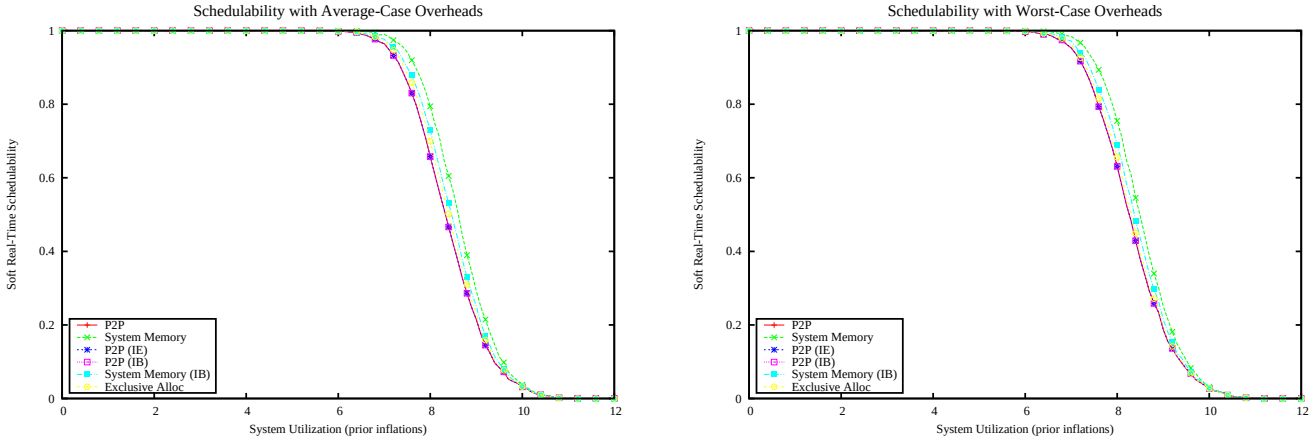

Figure 6694: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

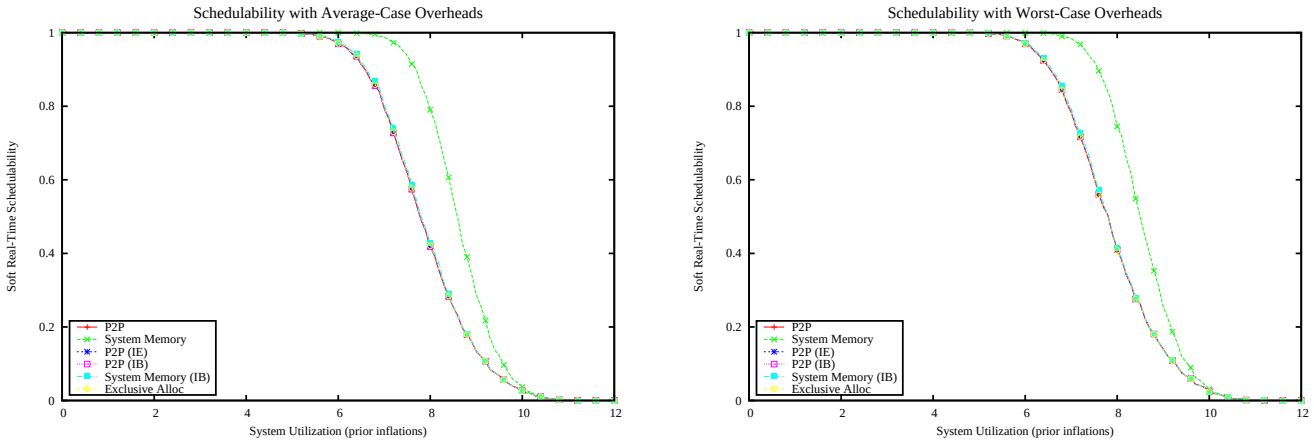

Figure 6695: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

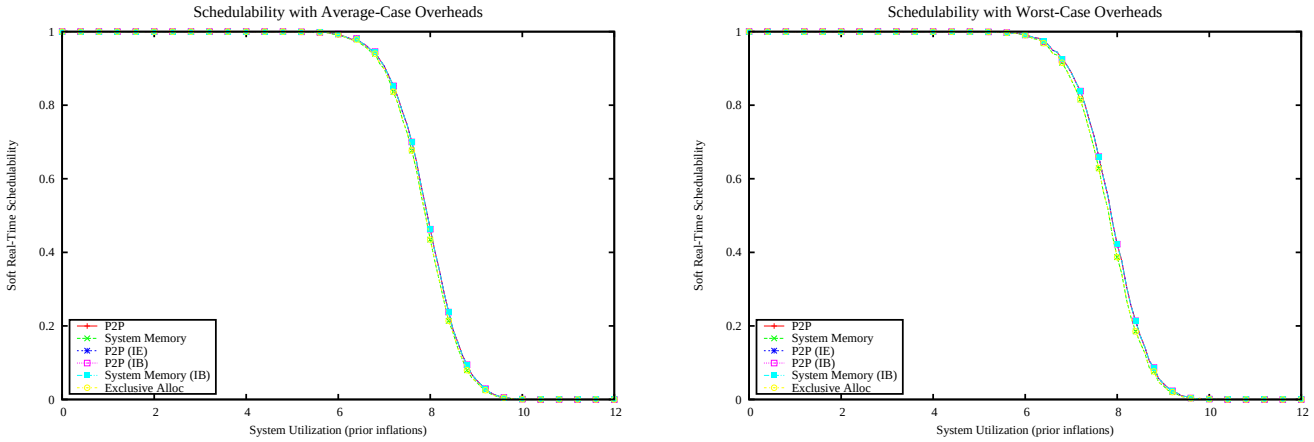

Figure 6696: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

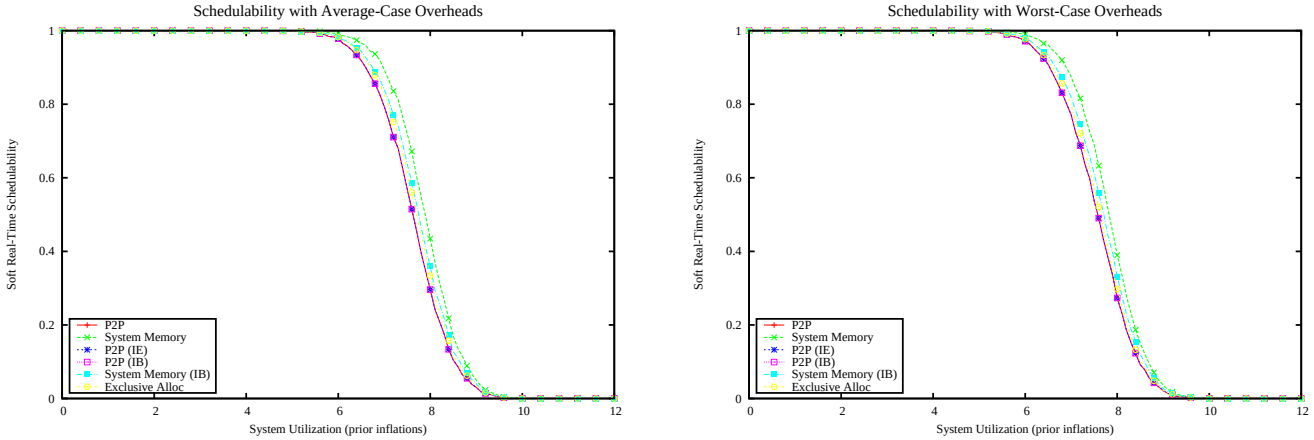

Figure 6697: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

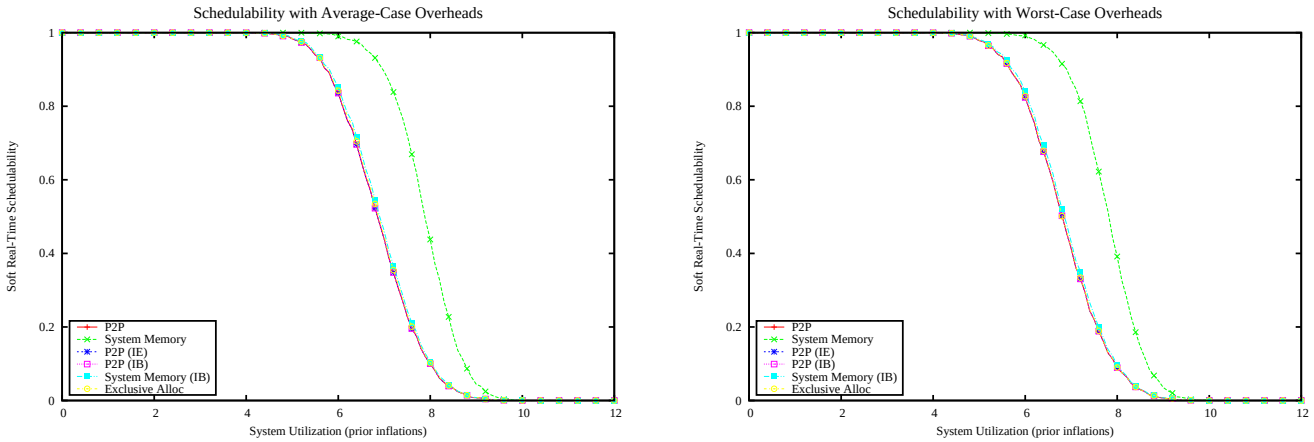

Figure 6698: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

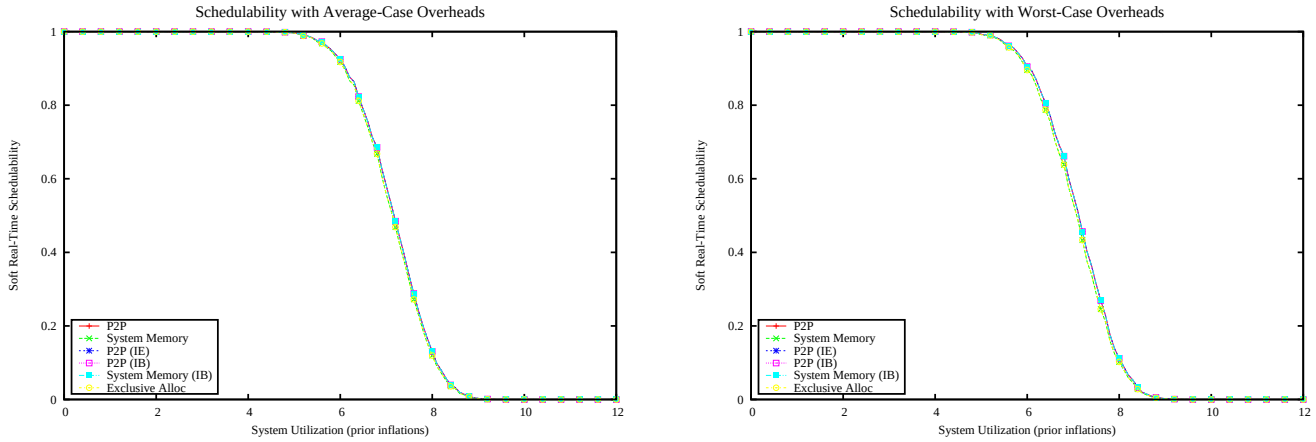

Figure 6699: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

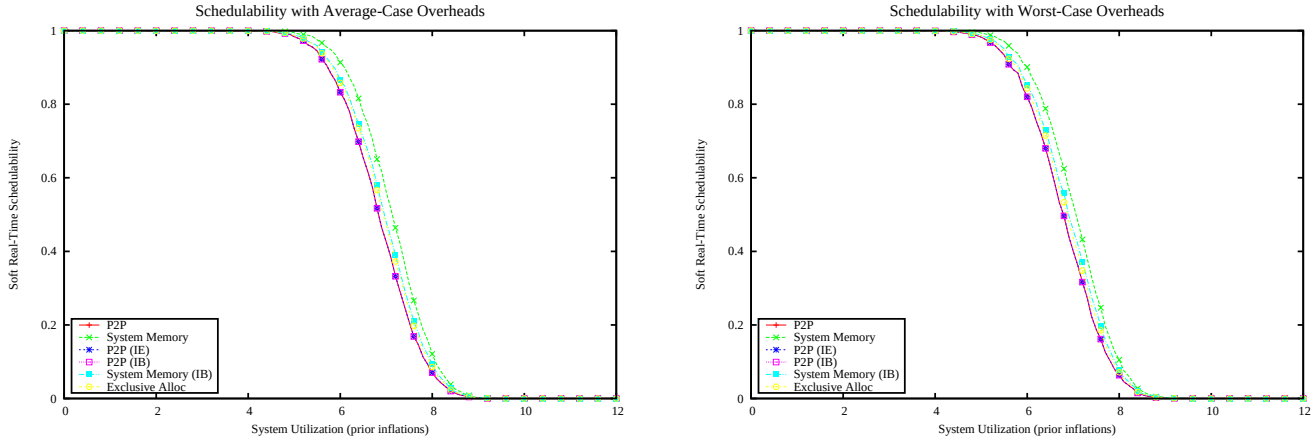

Figure 6700: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

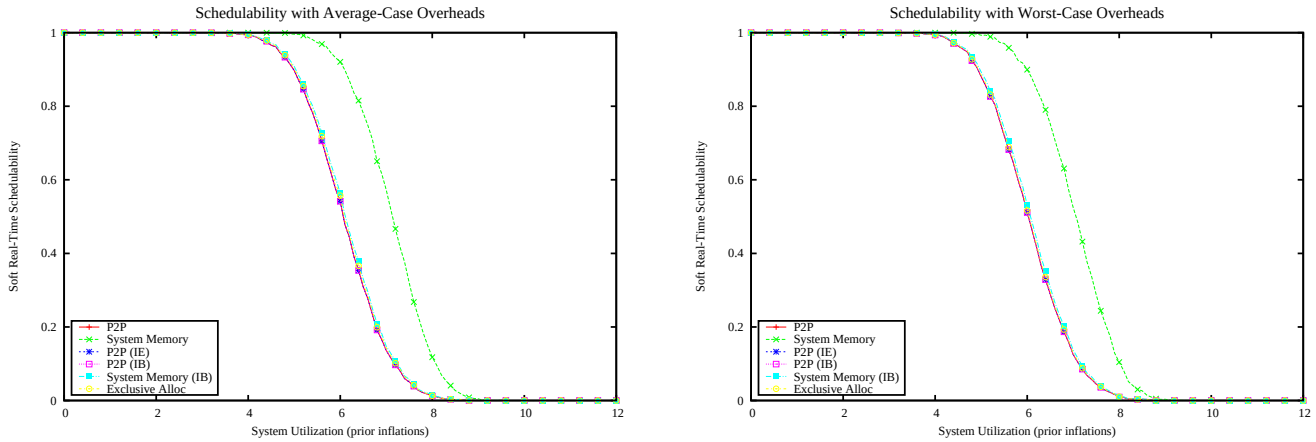

Figure 6701: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

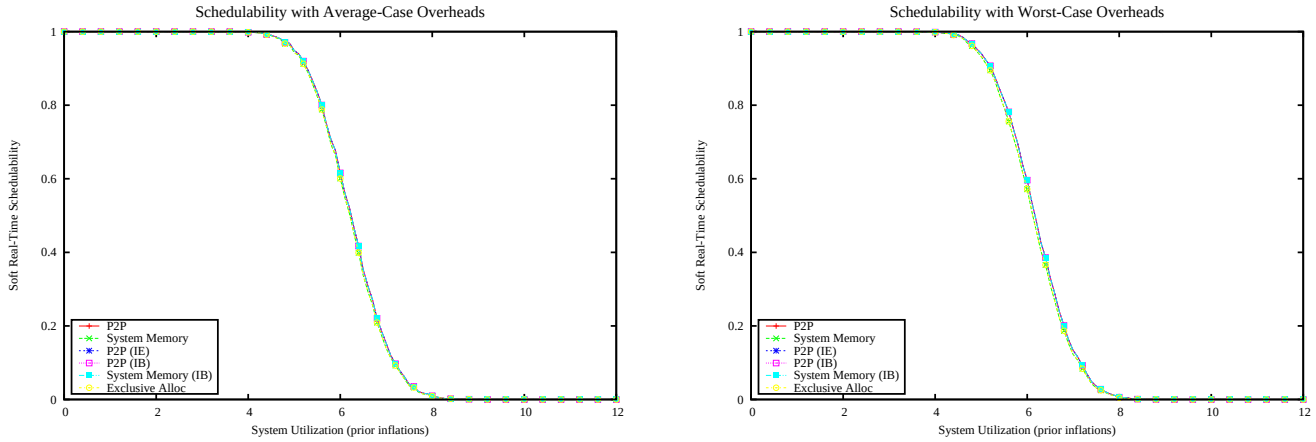

Figure 6702: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

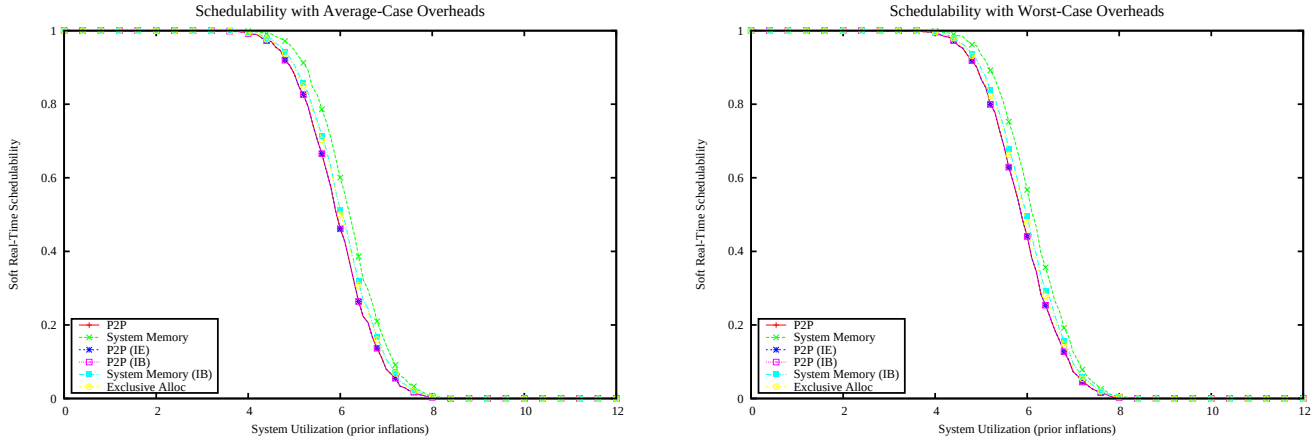

Figure 6703: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

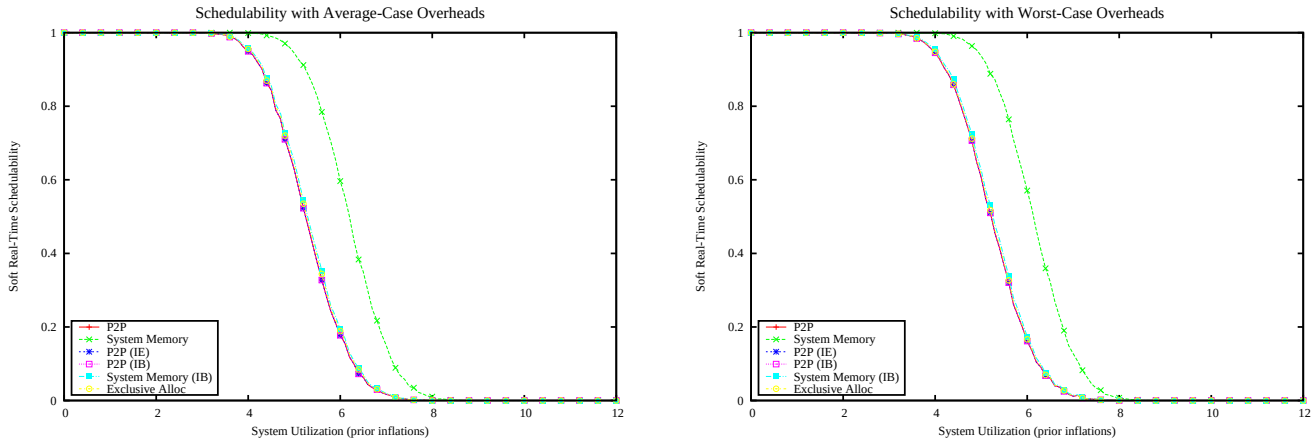

Figure 6704: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

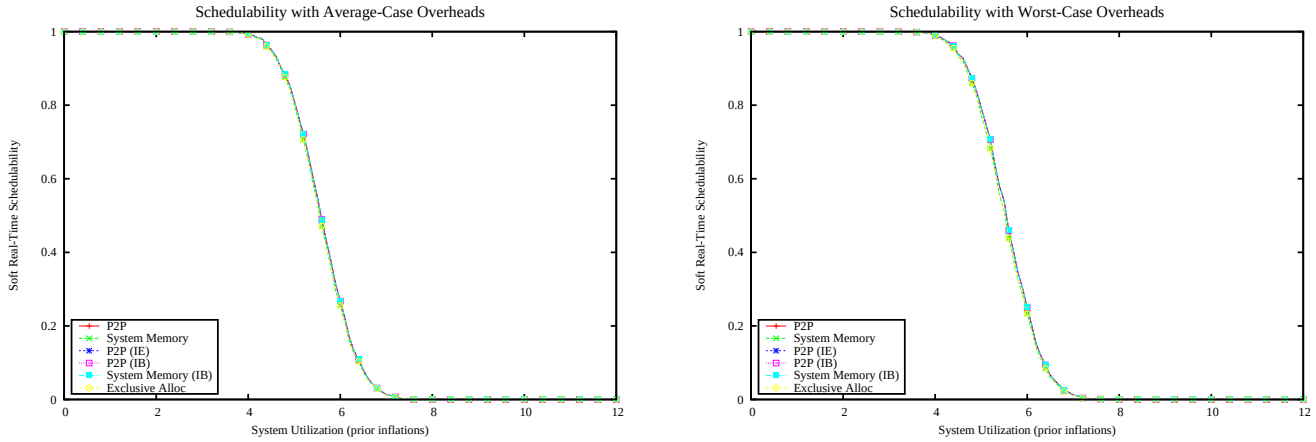

Figure 6705: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

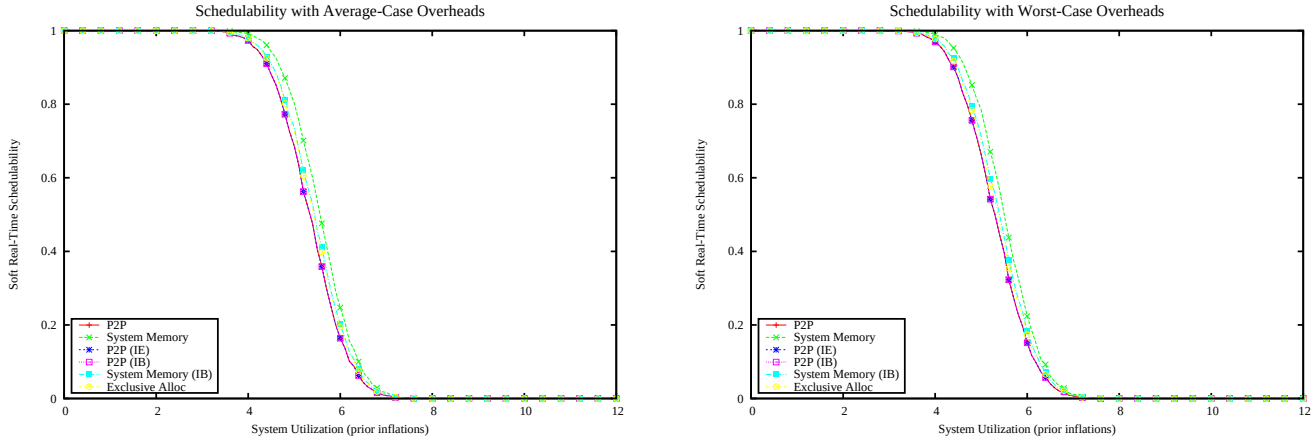

Figure 6706: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

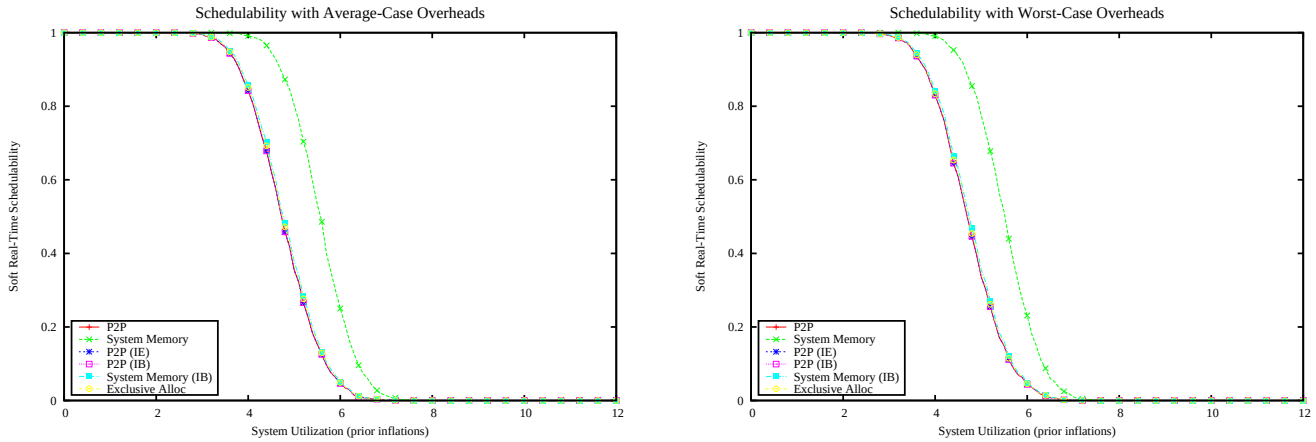

Figure 6707: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

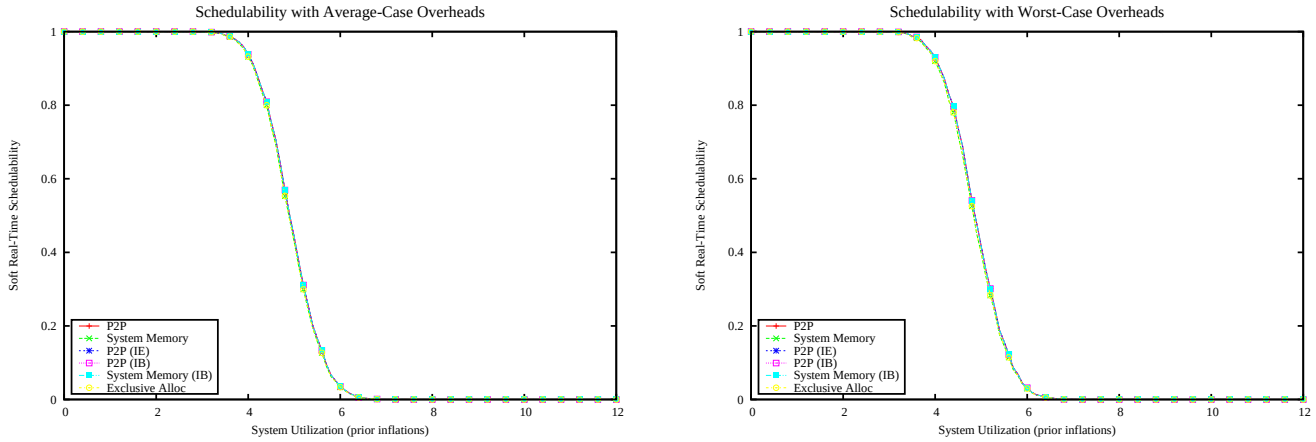

Figure 6708: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

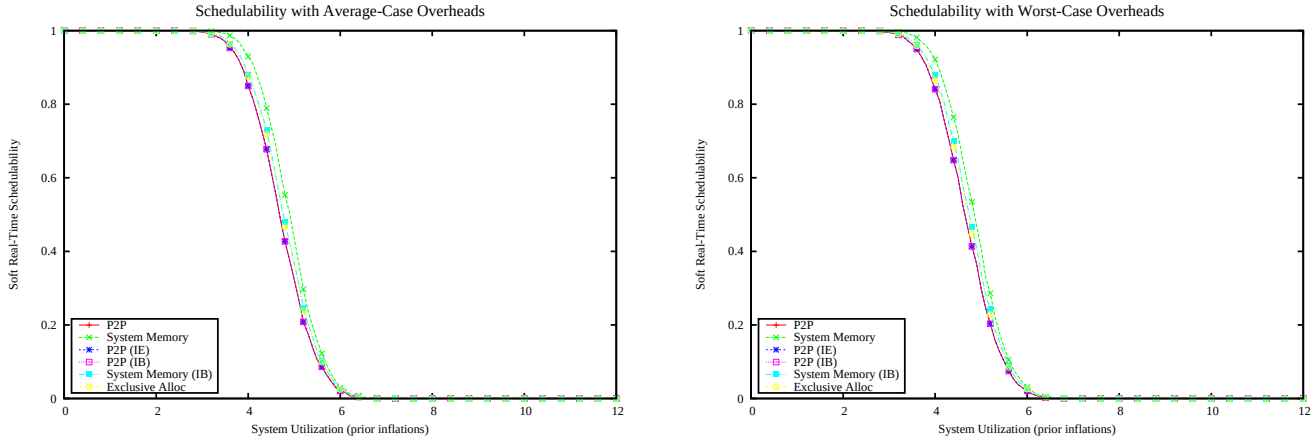

Figure 6709: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

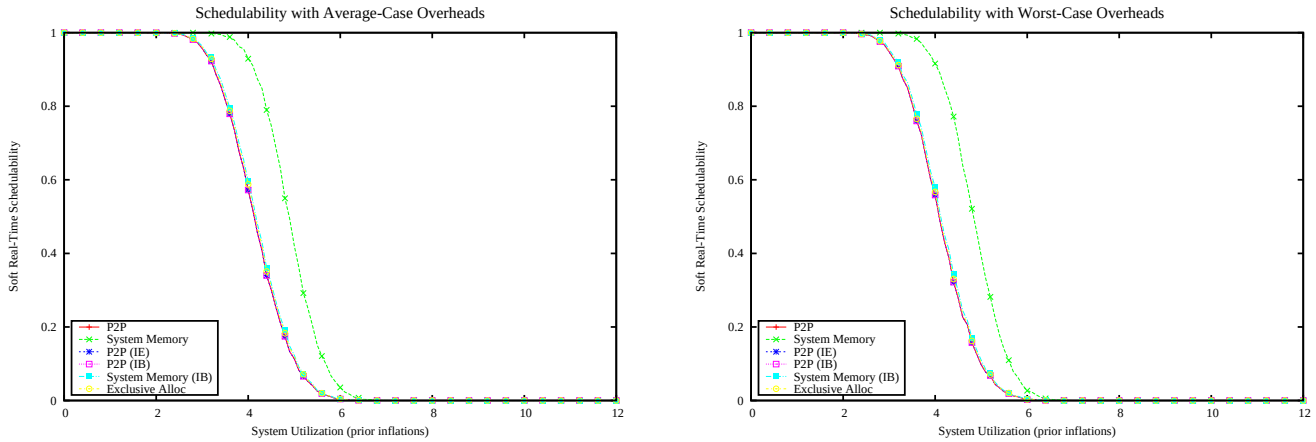

Figure 6710: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

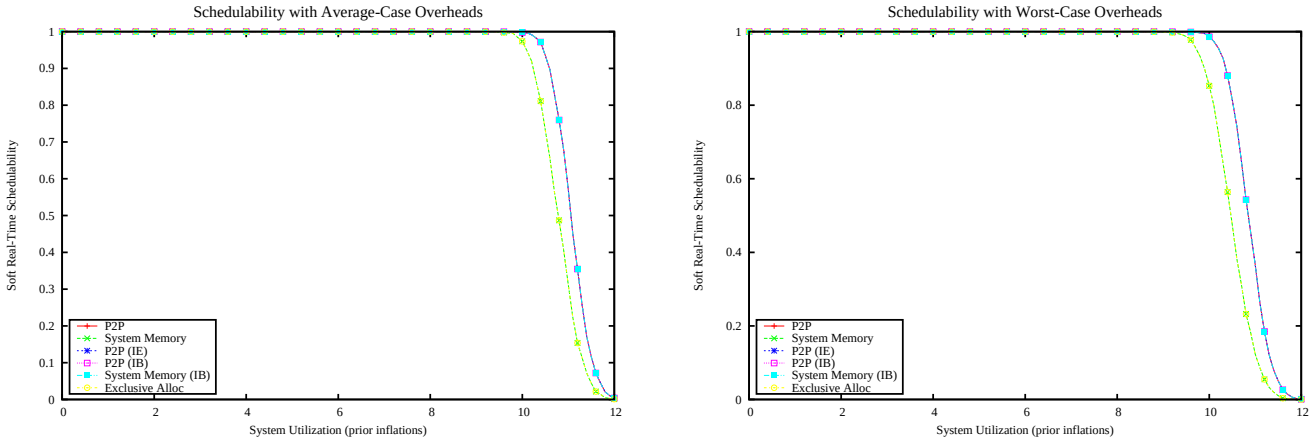

Figure 6711: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

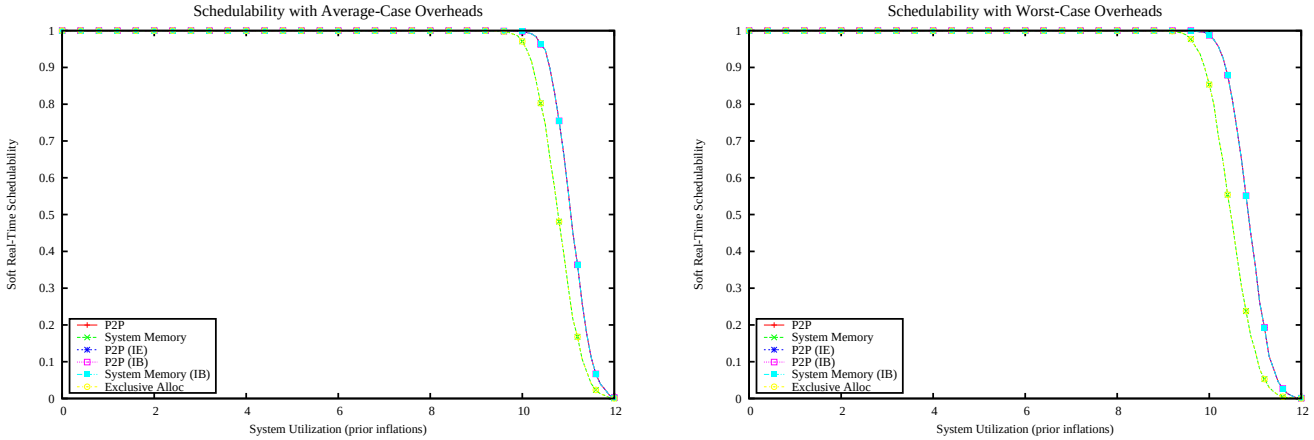

Figure 6712: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

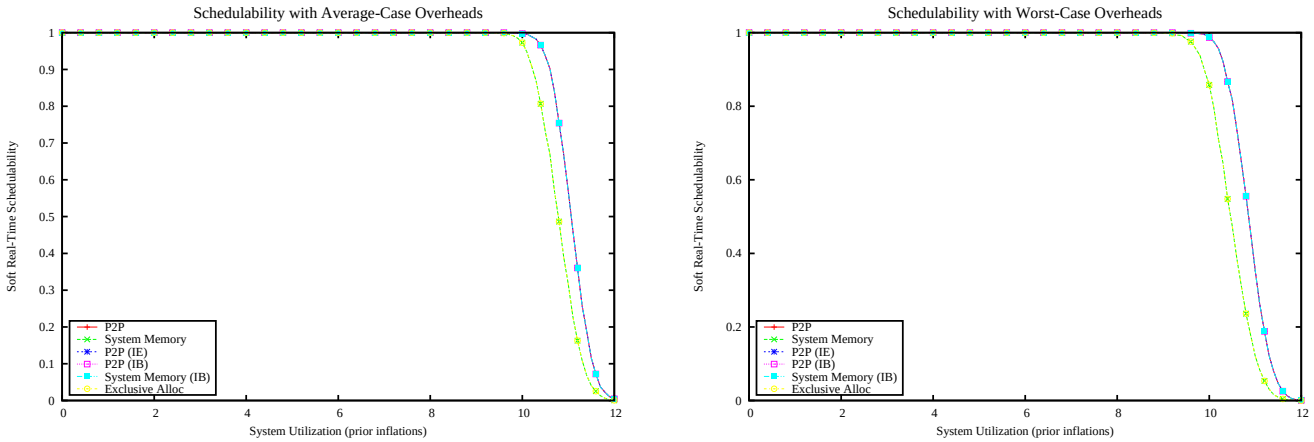

Figure 6713: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

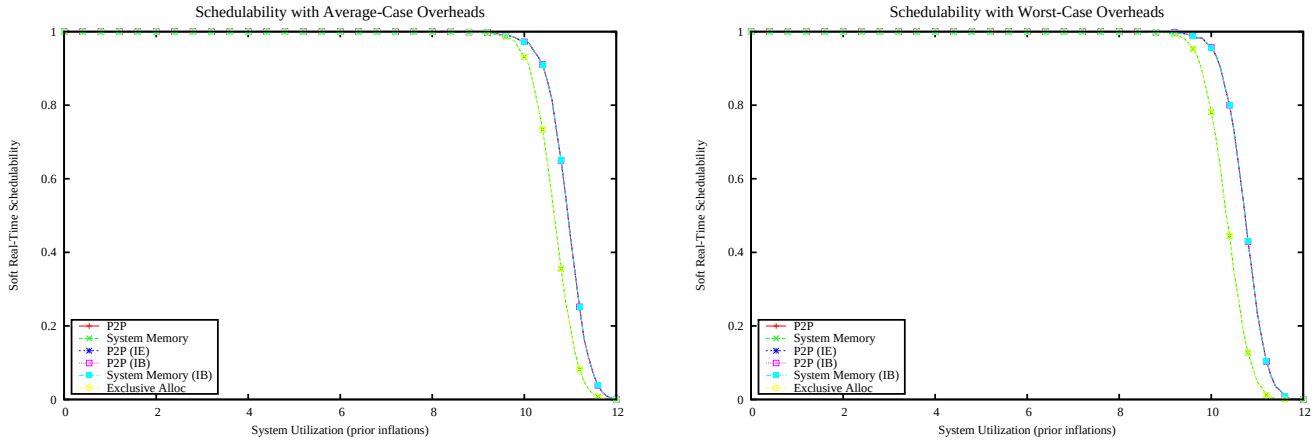

Figure 6714: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

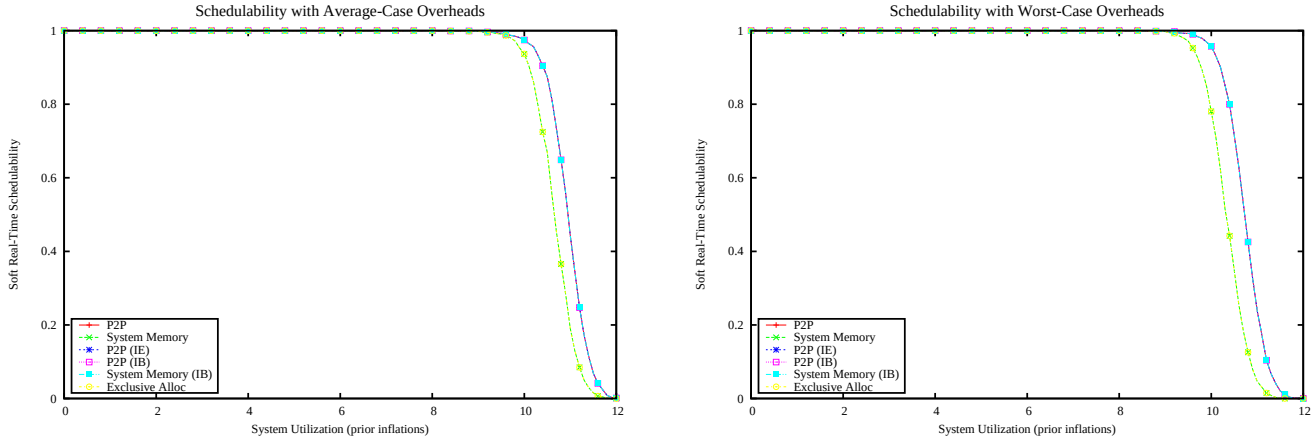

Figure 6715: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

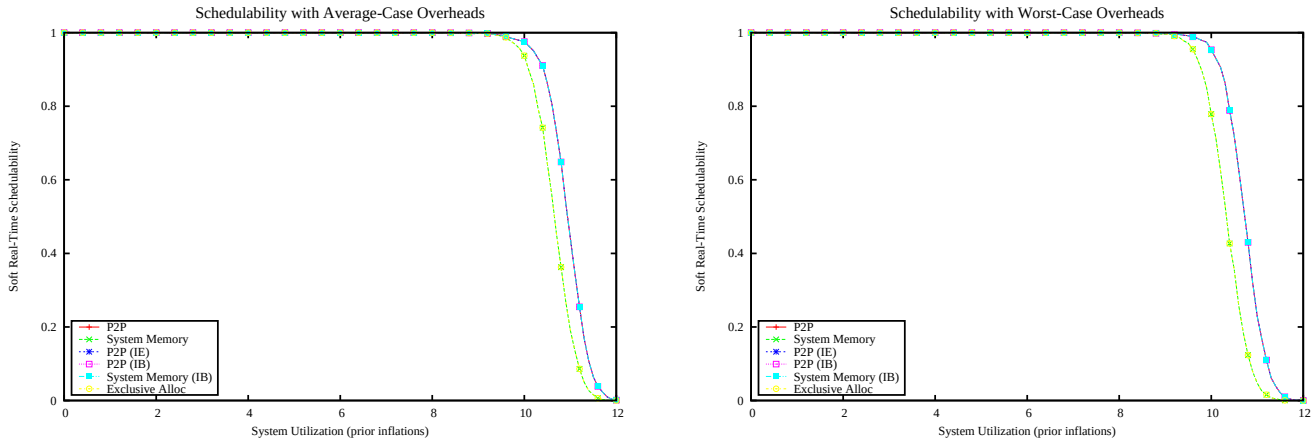

Figure 6716: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

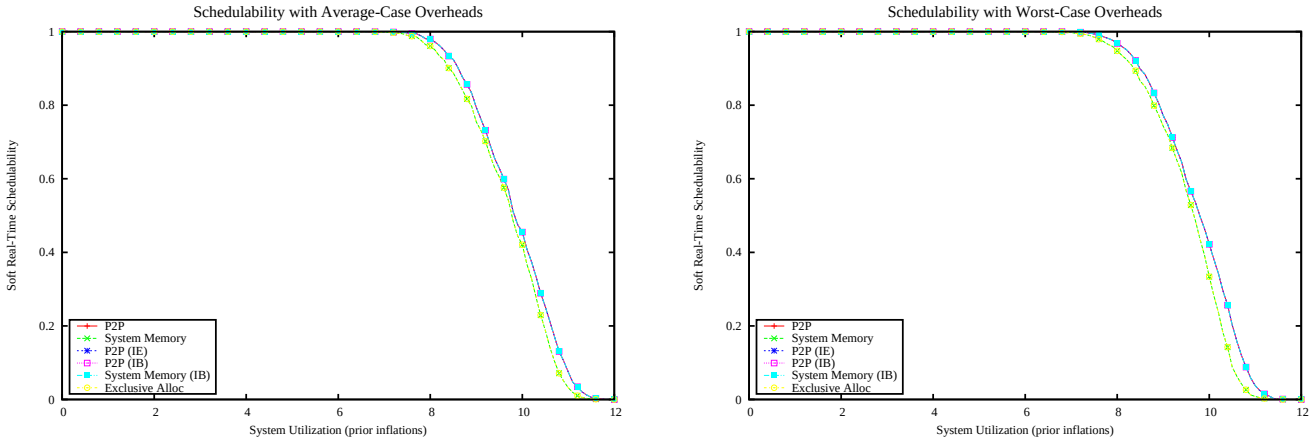

Figure 6717: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

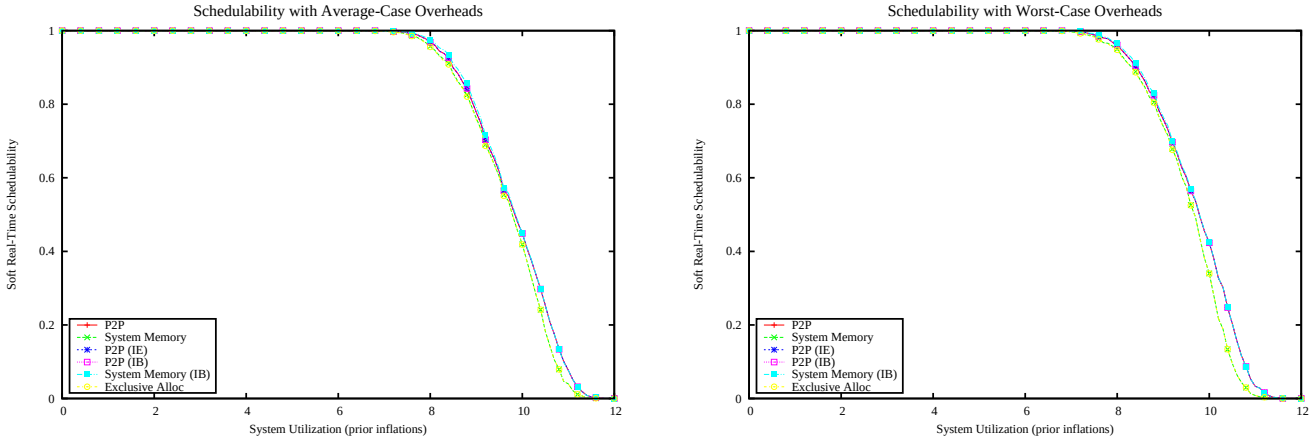

Figure 6718: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

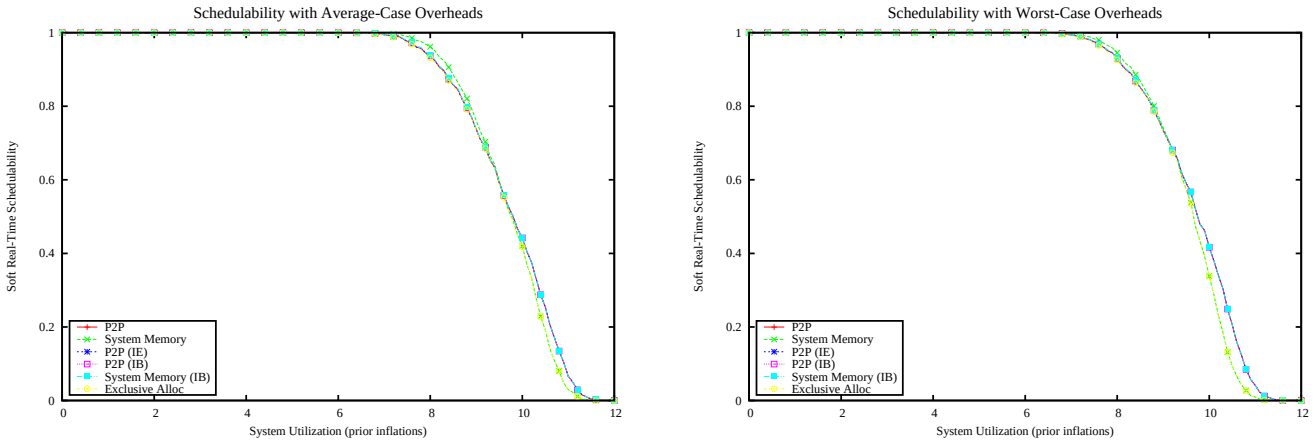

Figure 6719: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

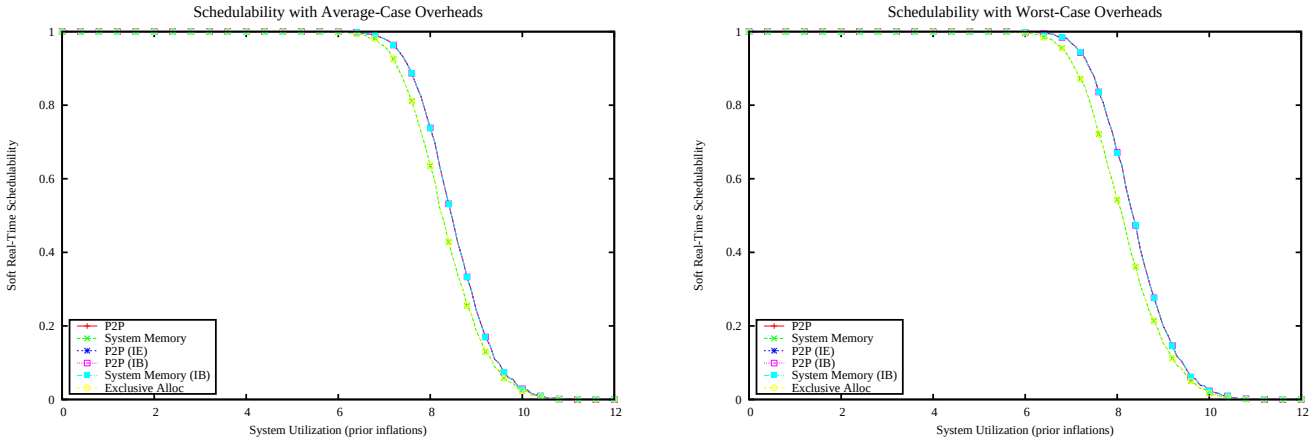

Figure 6720: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

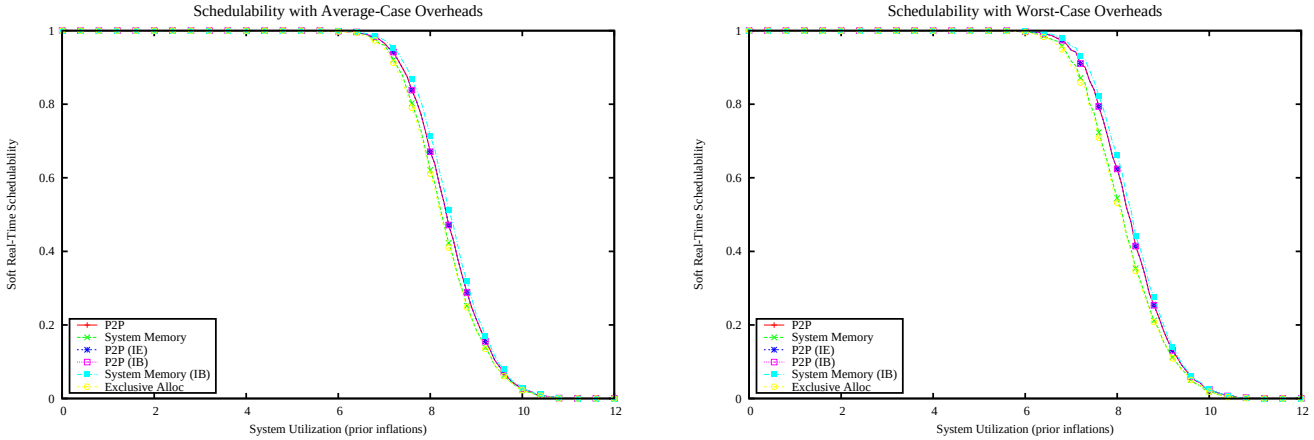

Figure 6721: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

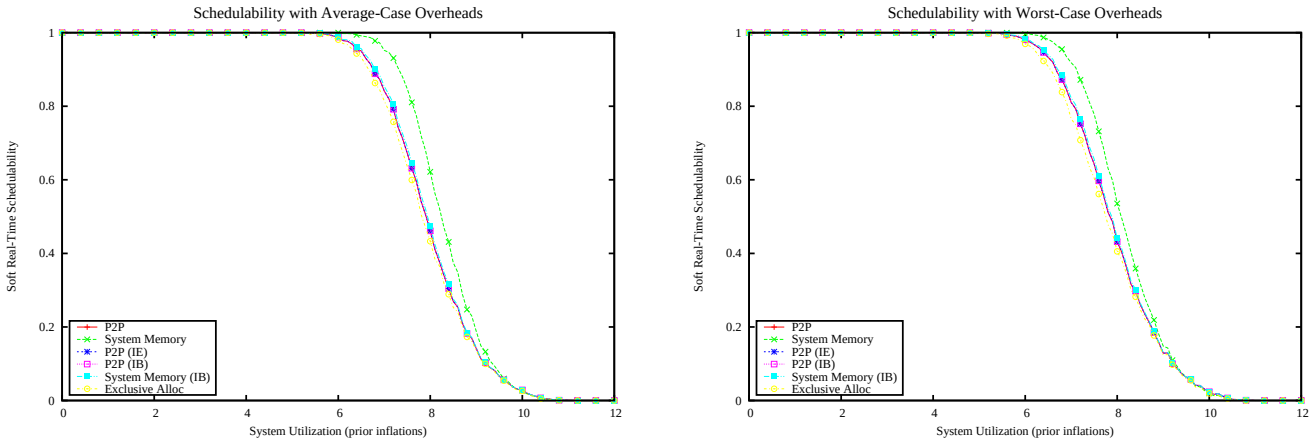

Figure 6722: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

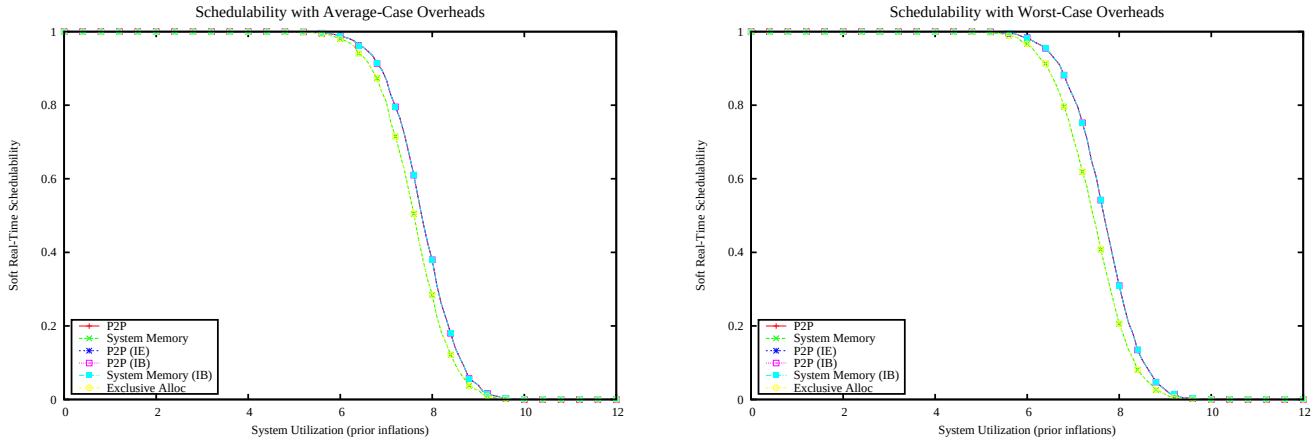

Figure 6723: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

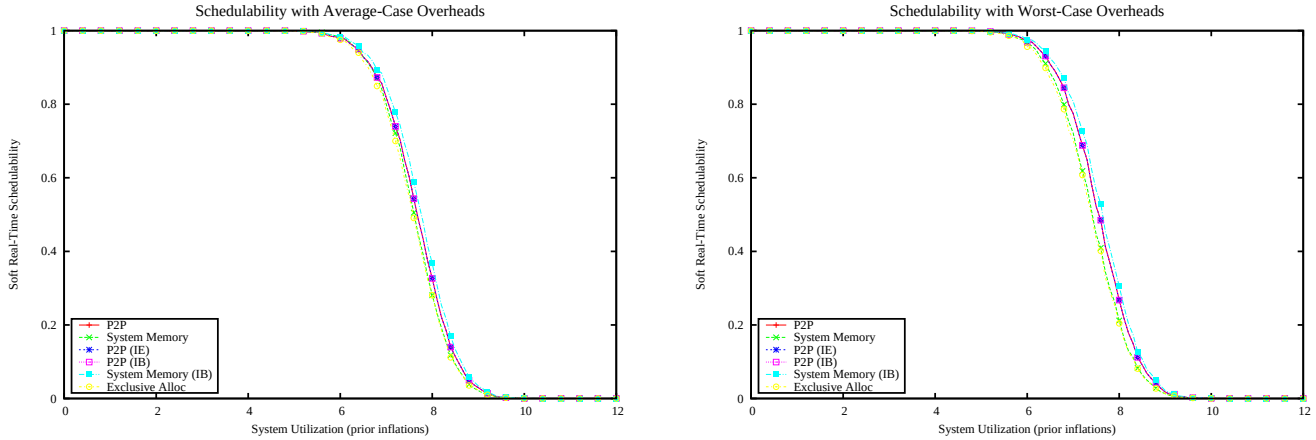

Figure 6724: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

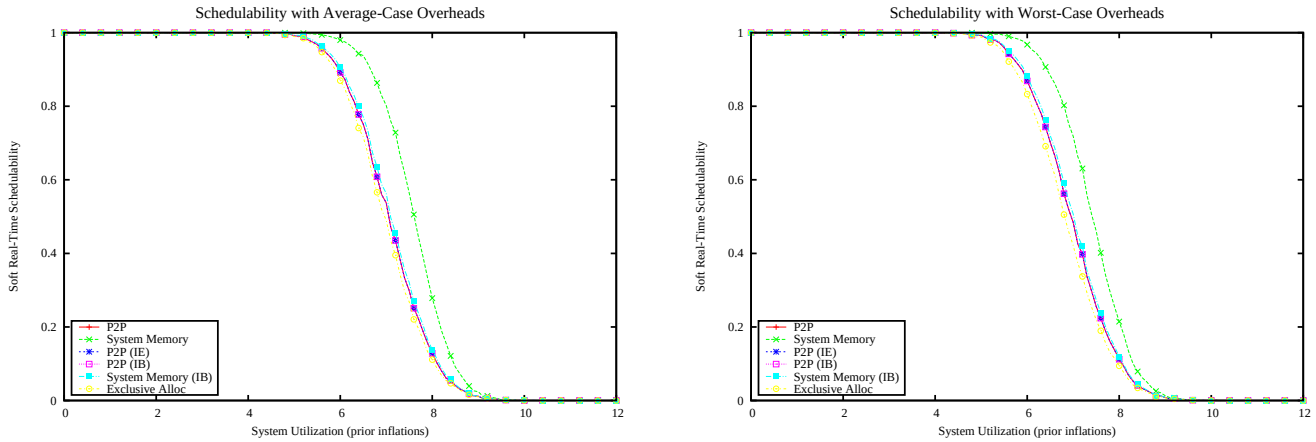

Figure 6725: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

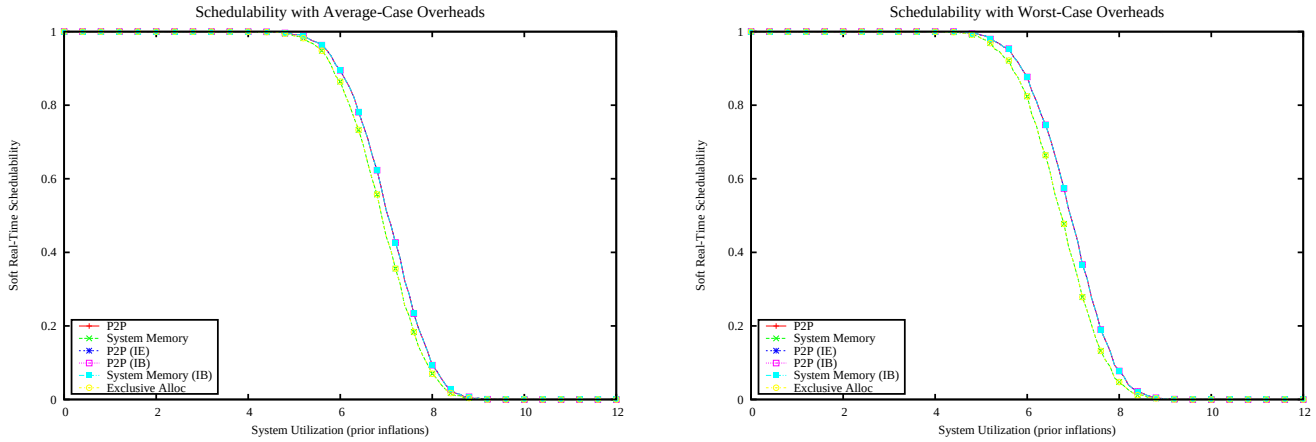

Figure 6726: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

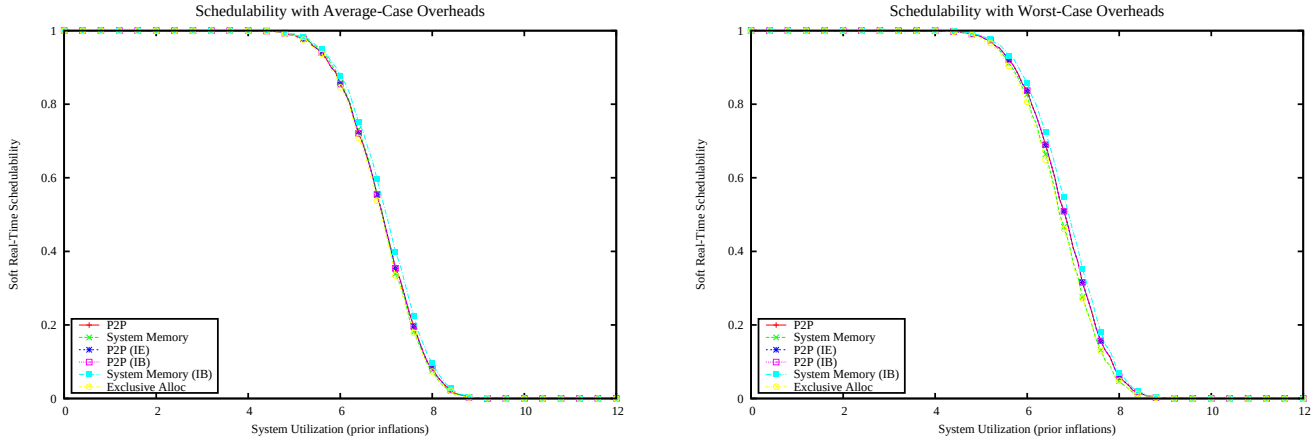

Figure 6727: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

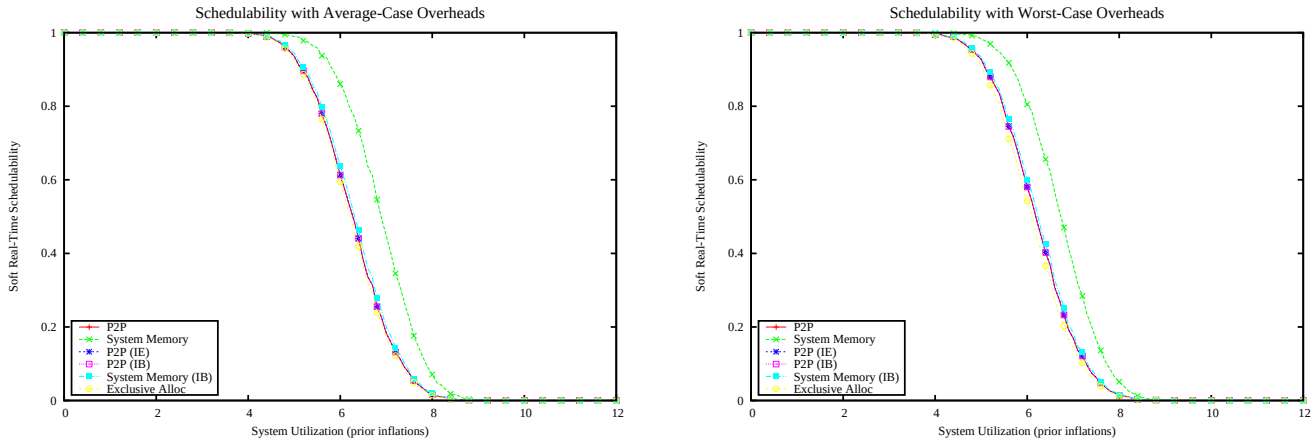

Figure 6728: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

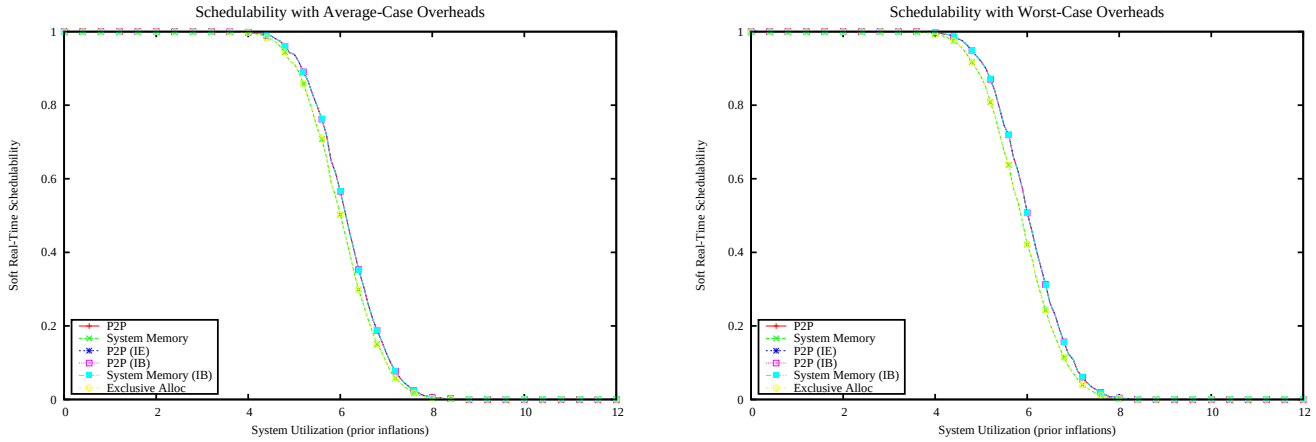

Figure 6729: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

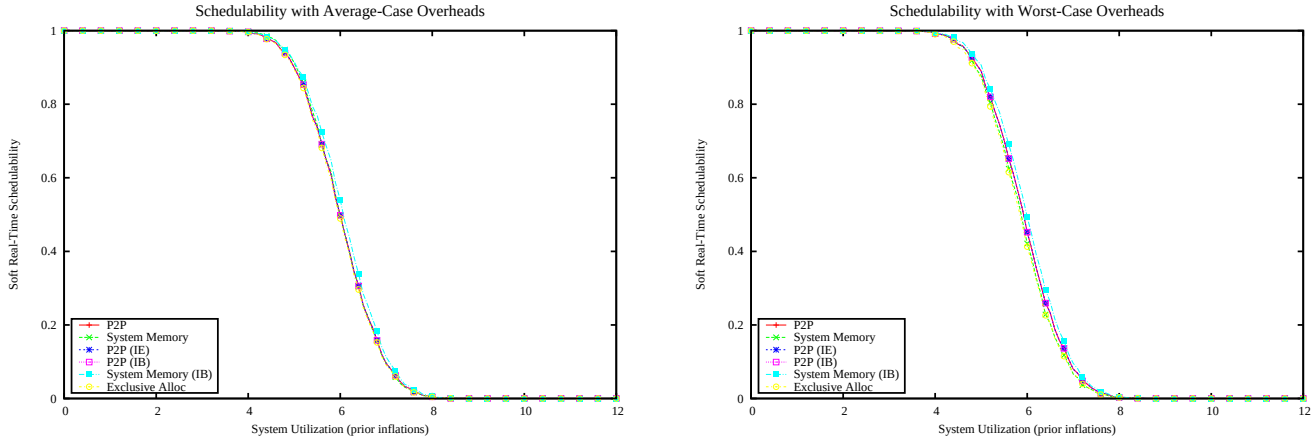

Figure 6730: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

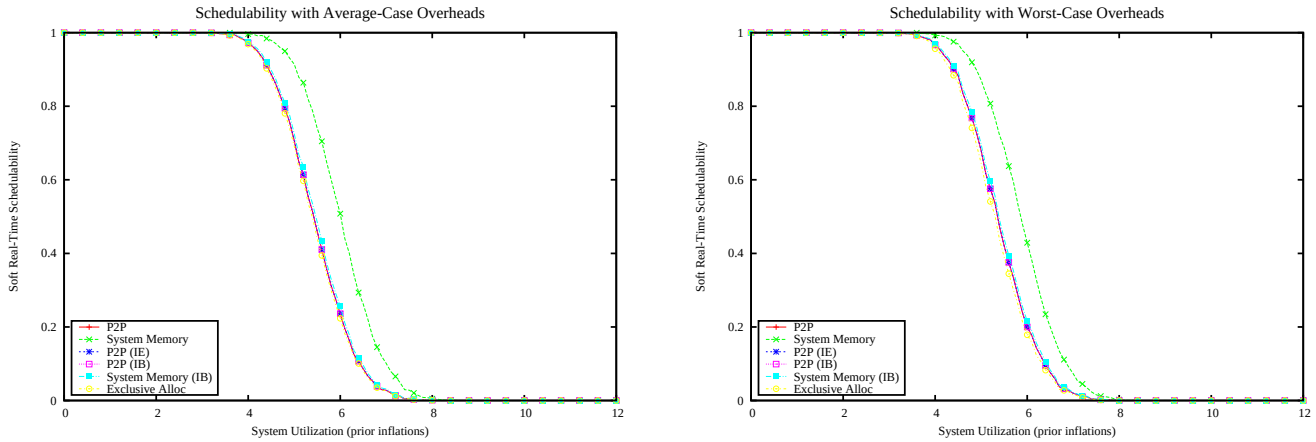

Figure 6731: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

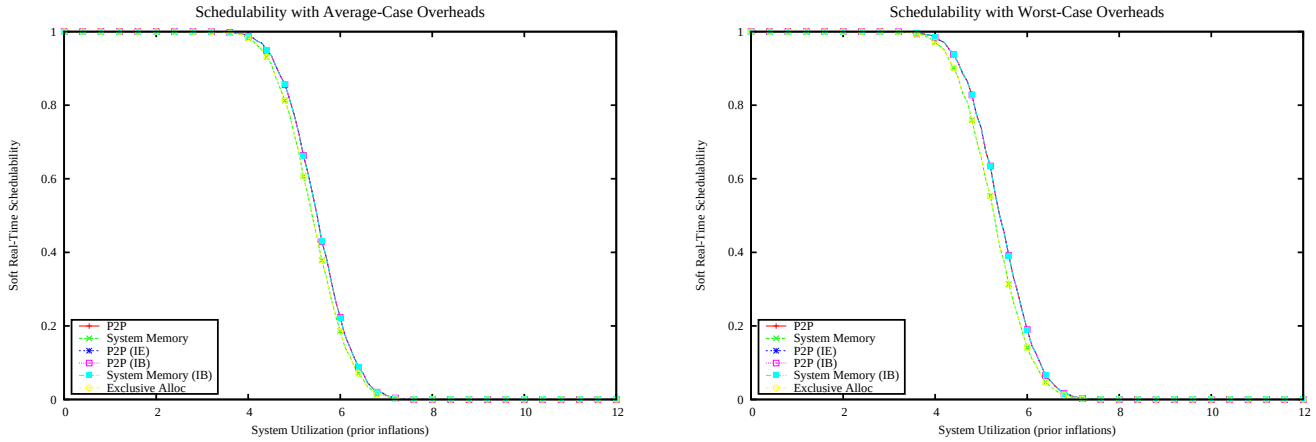

Figure 6732: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

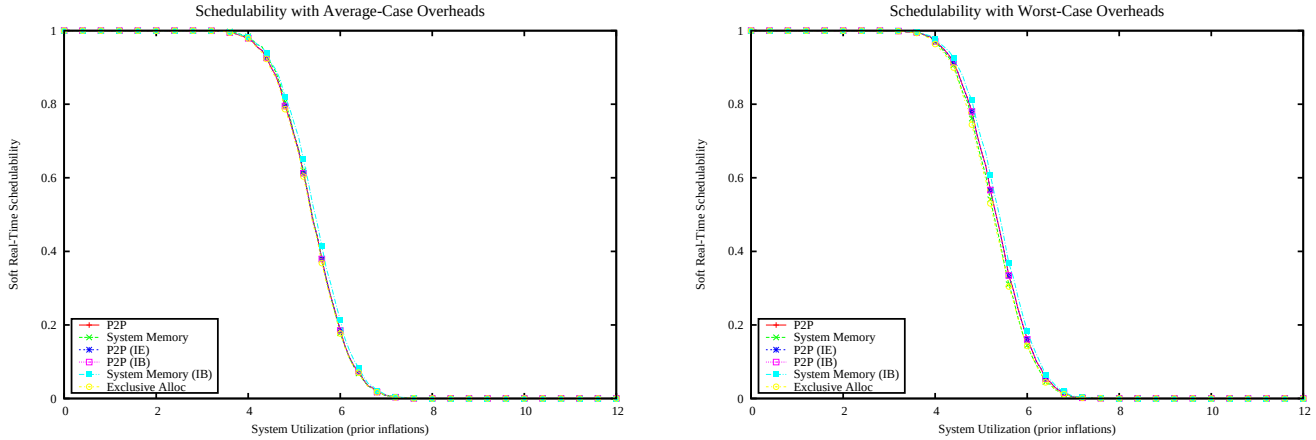

Figure 6733: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

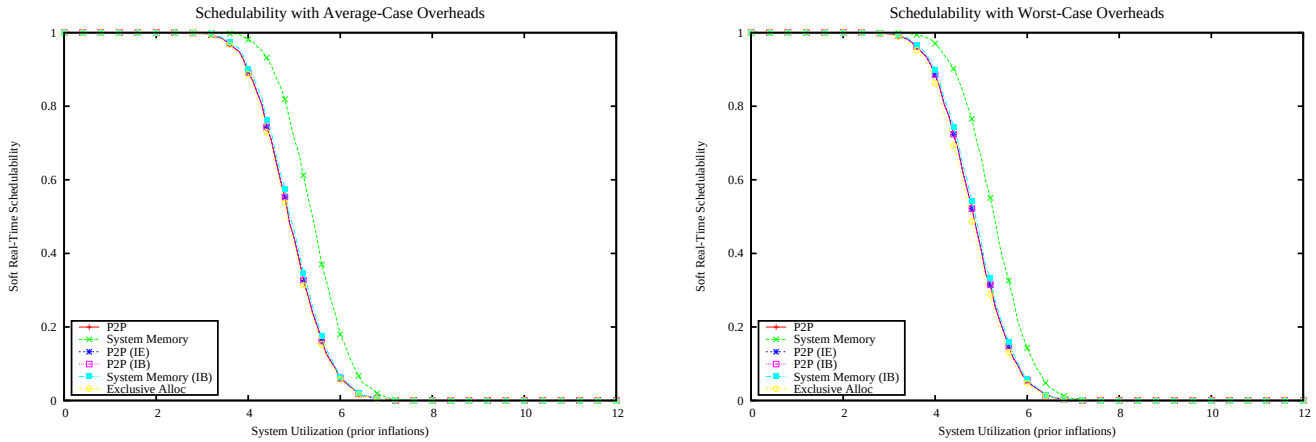

Figure 6734: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

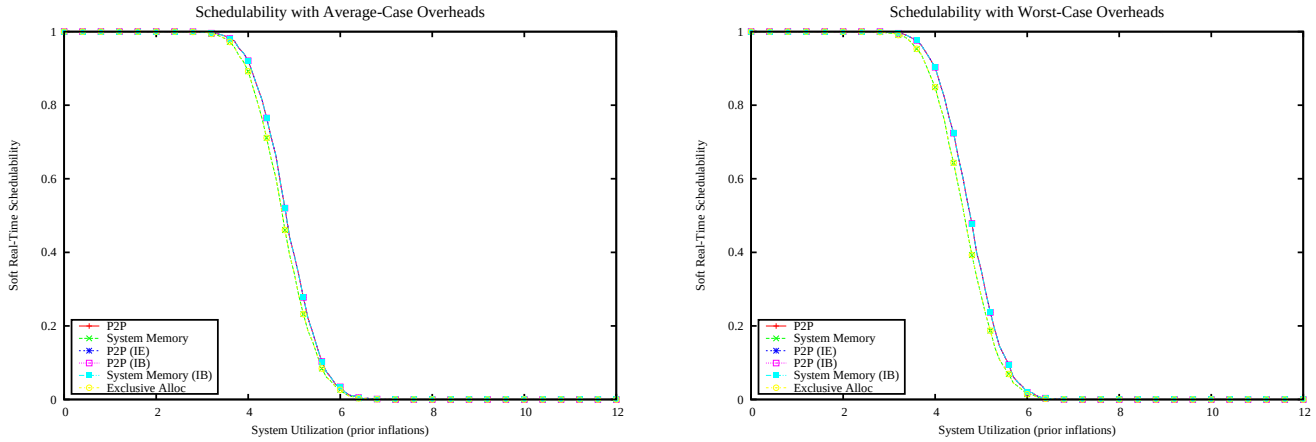

Figure 6735: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

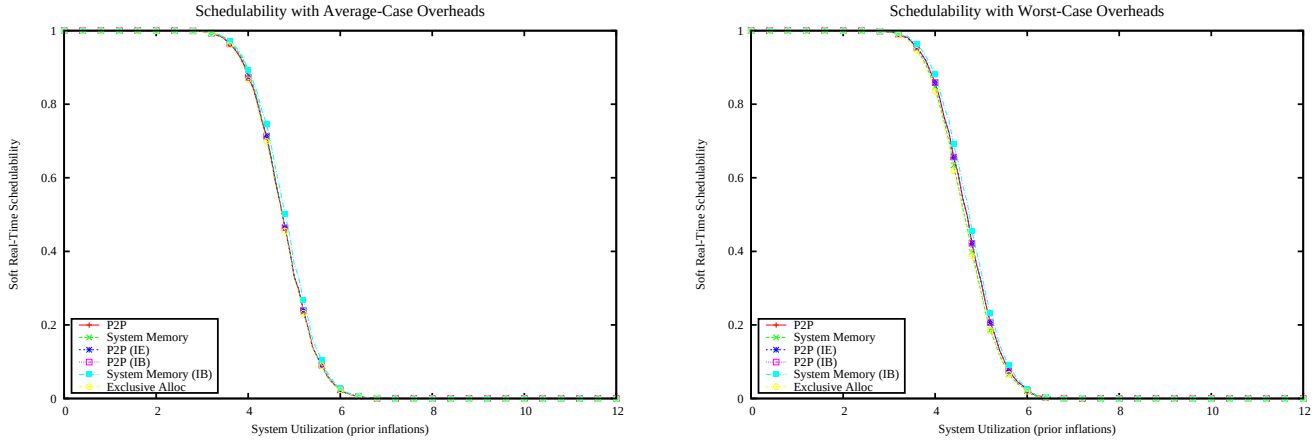

Figure 6736: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

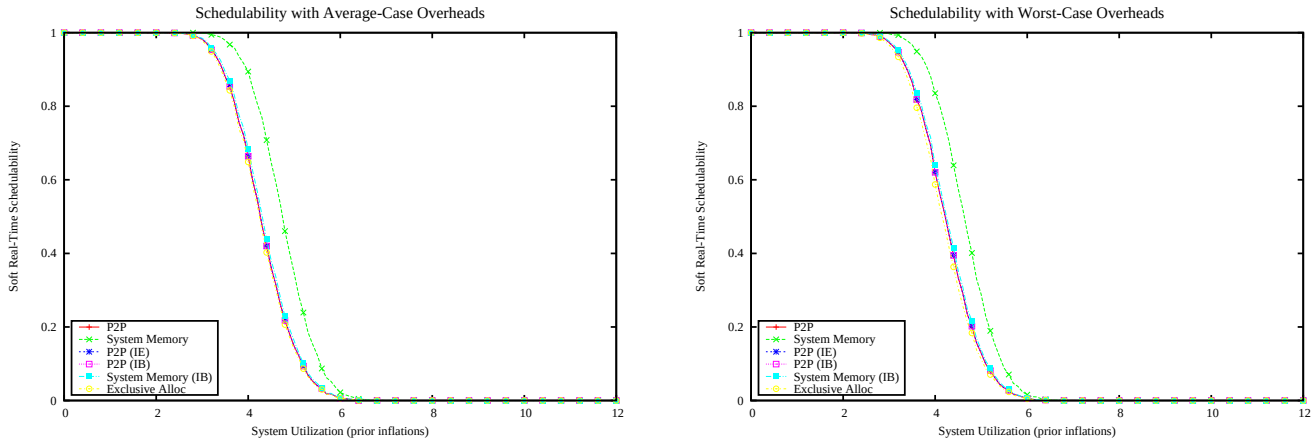

Figure 6737: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

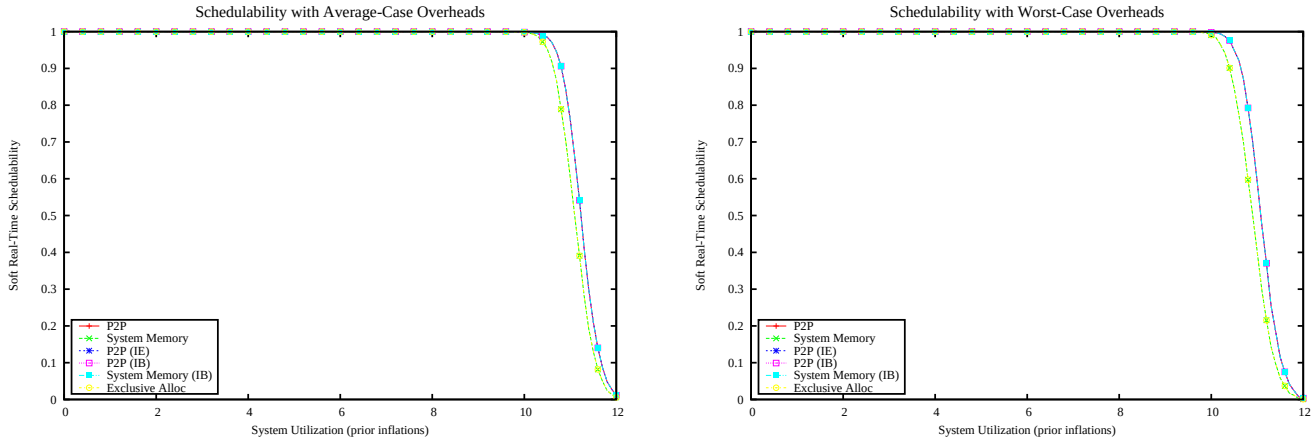

Figure 6738: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

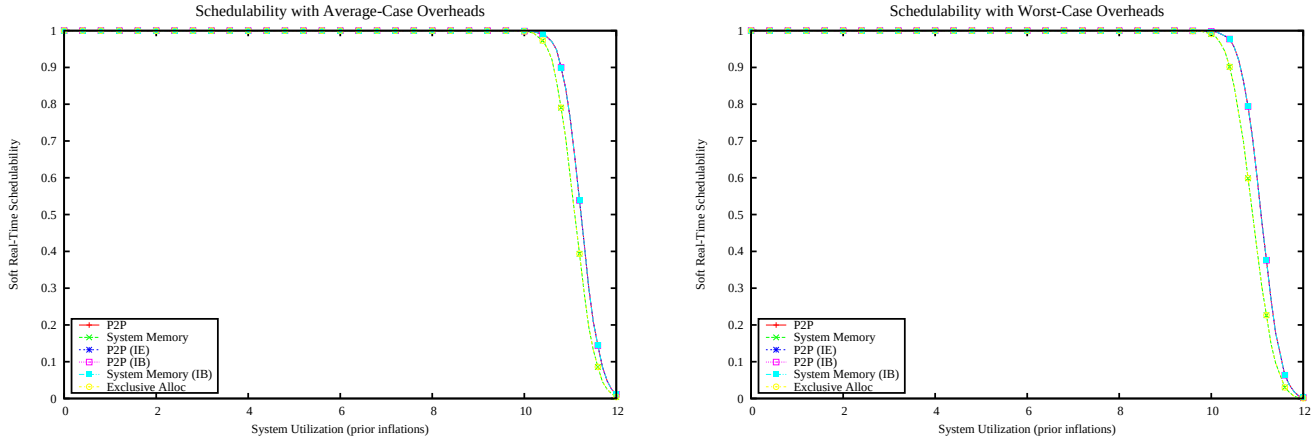

Figure 6739: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

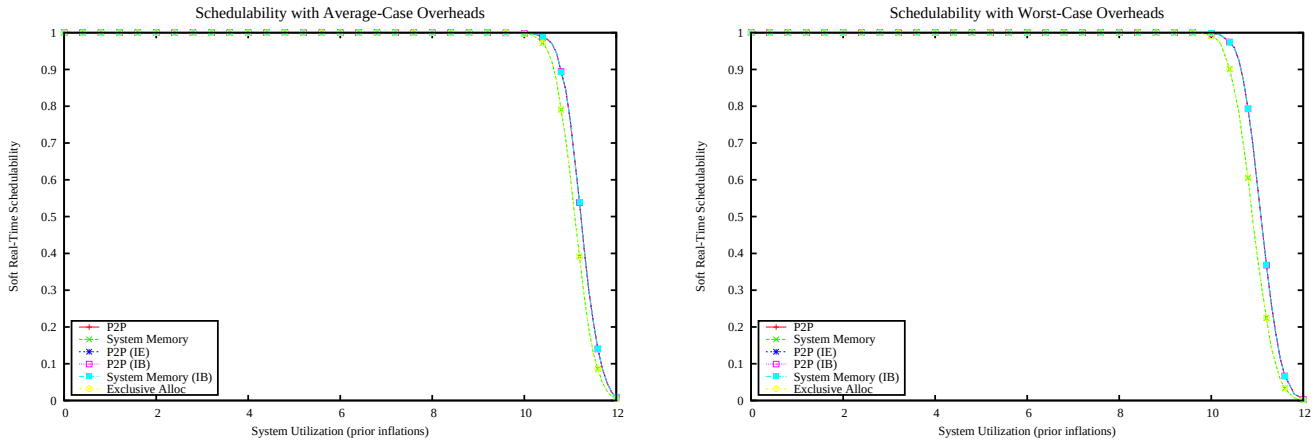

Figure 6740: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

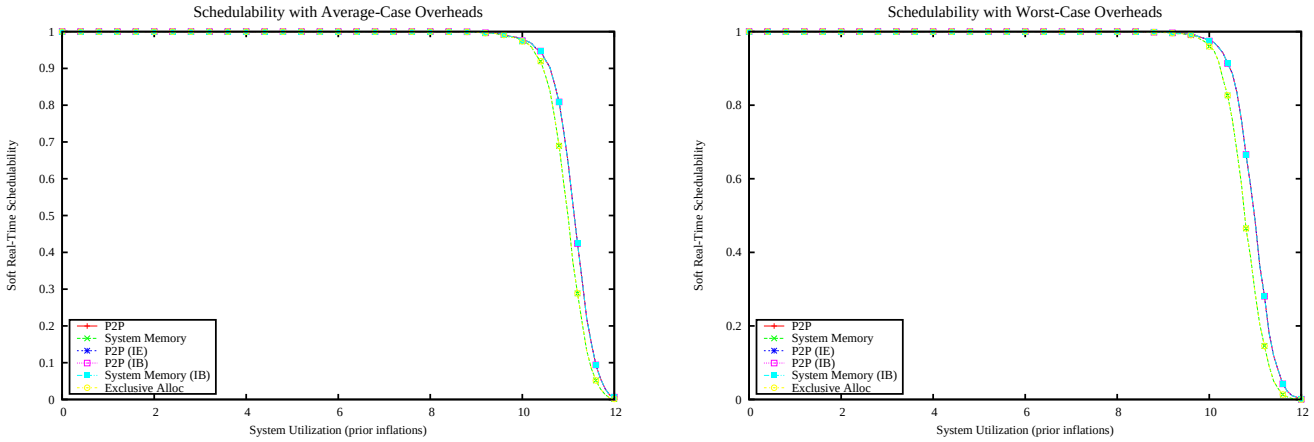

Figure 6741: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

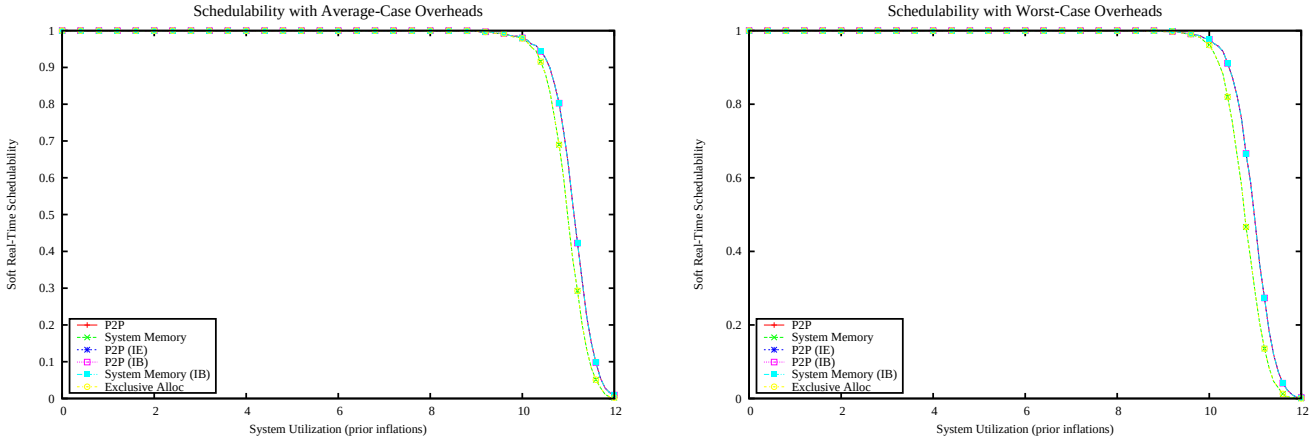

Figure 6742: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

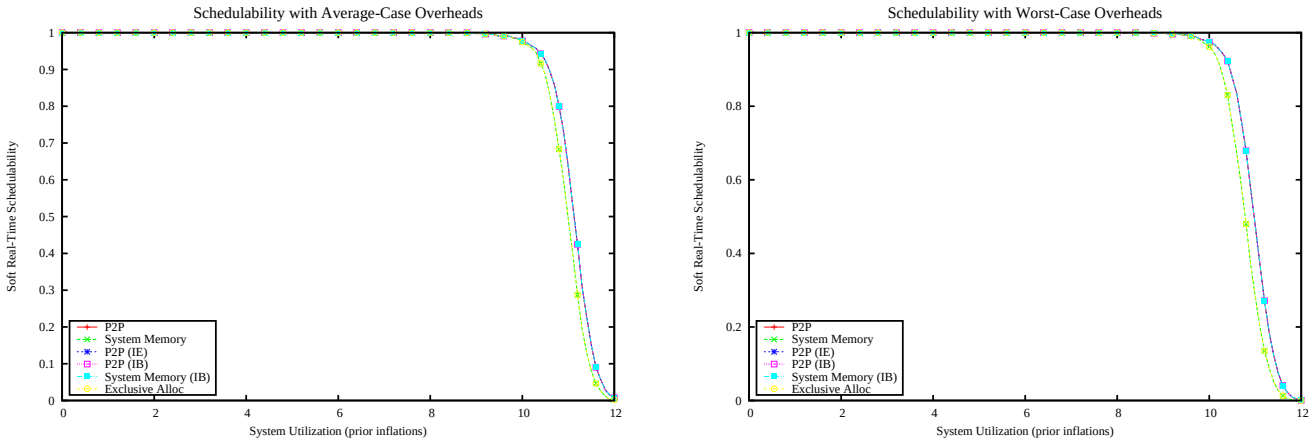

Figure 6743: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

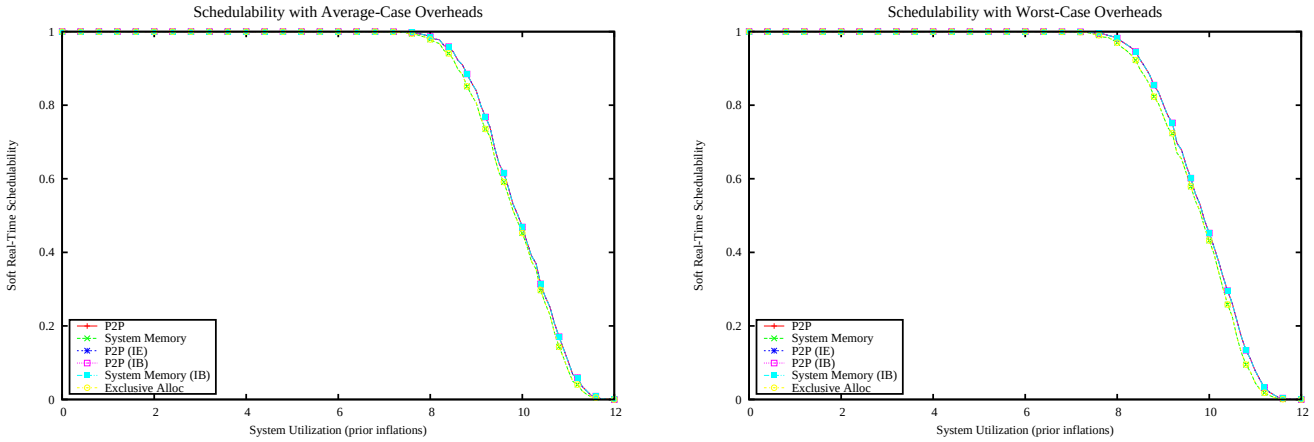

Figure 6744: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

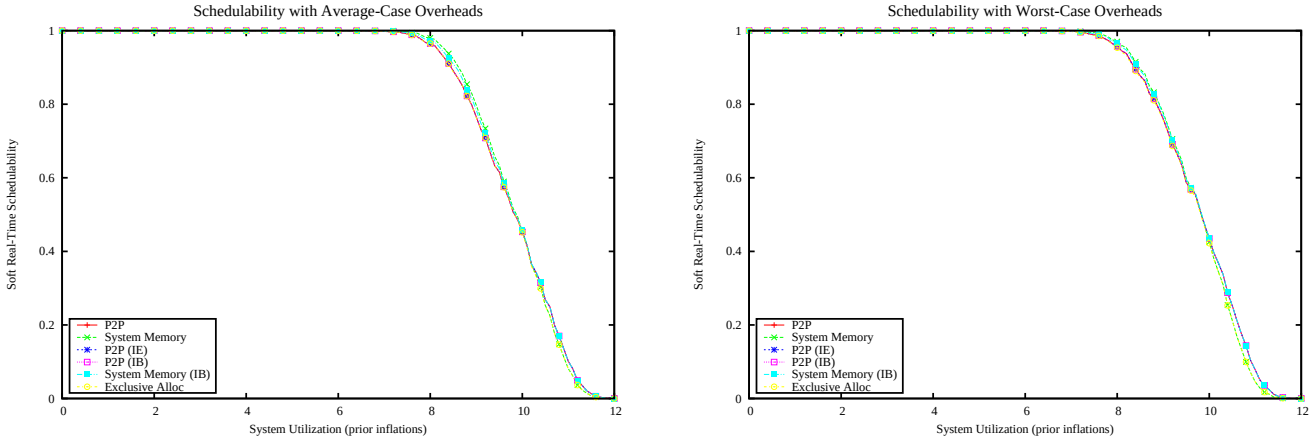

Figure 6745: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

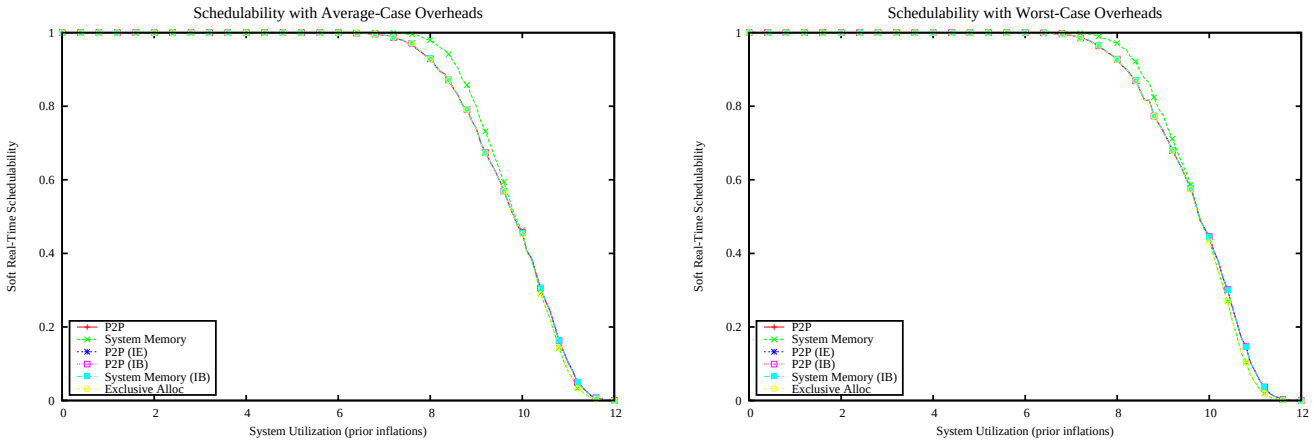

Figure 6746: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

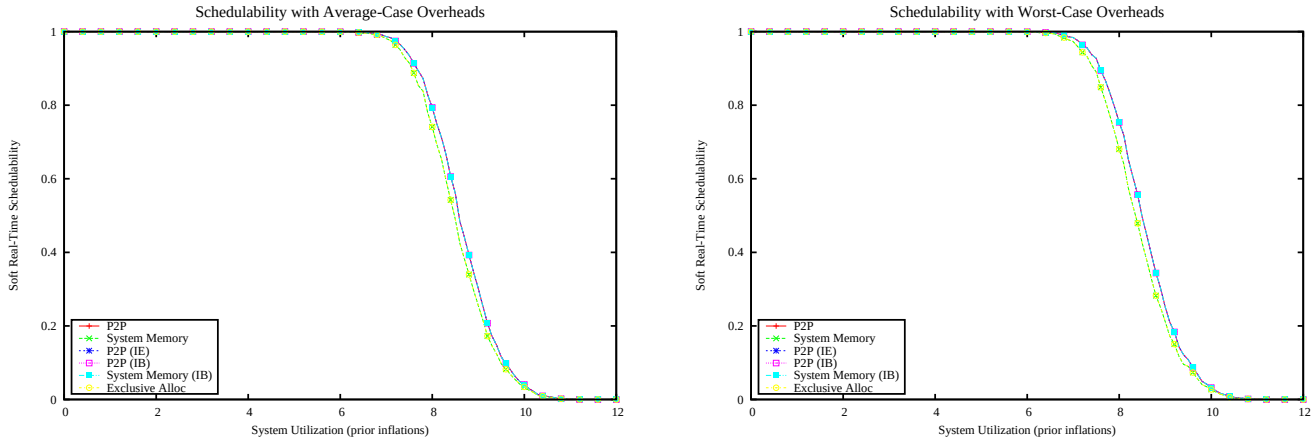

Figure 6747: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

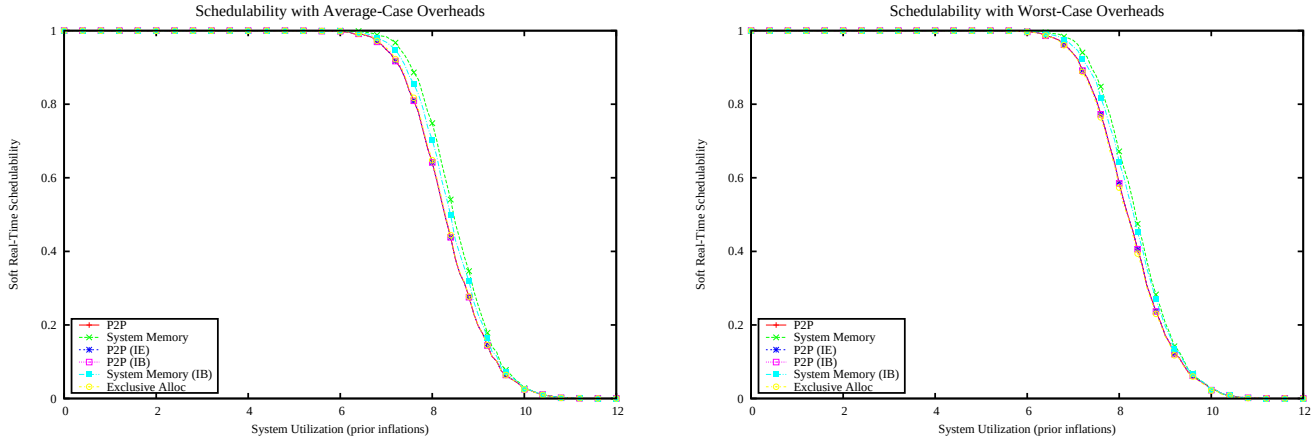

Figure 6748: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

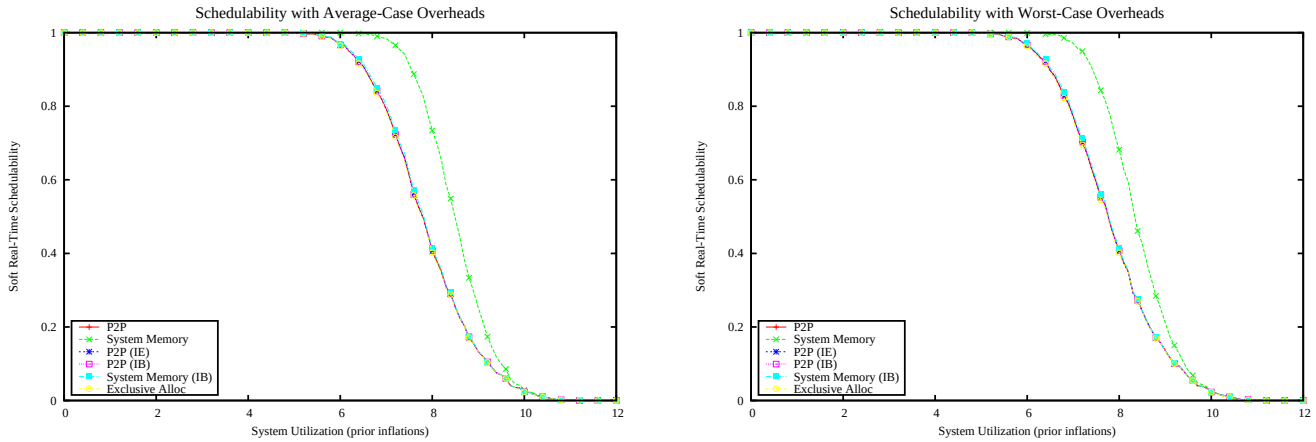

Figure 6749: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

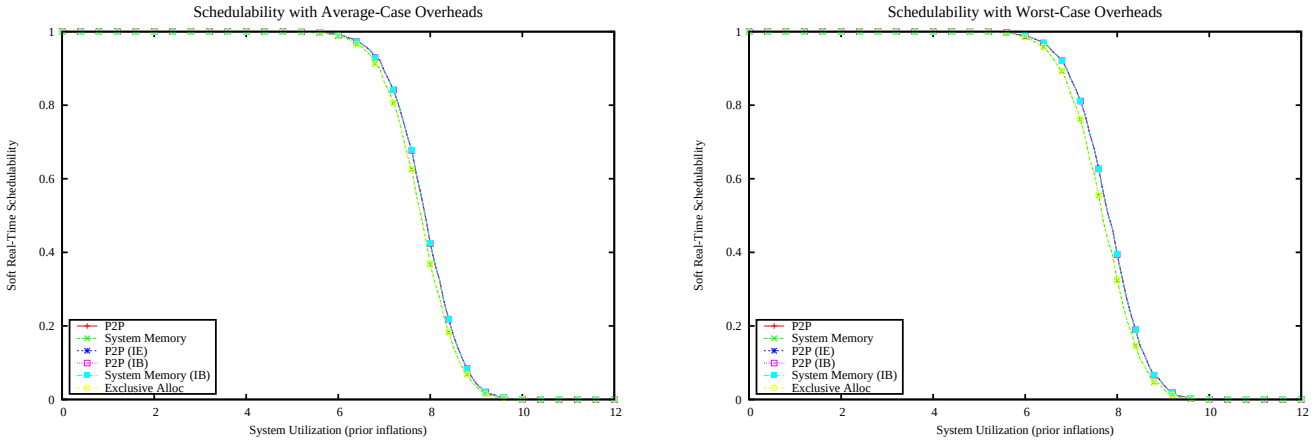

Figure 6750: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

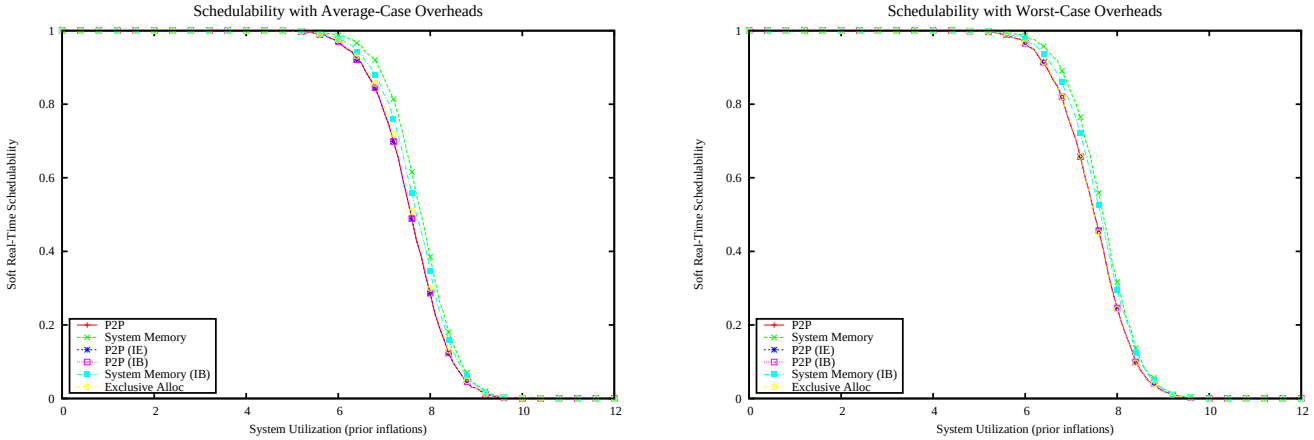

Figure 6751: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

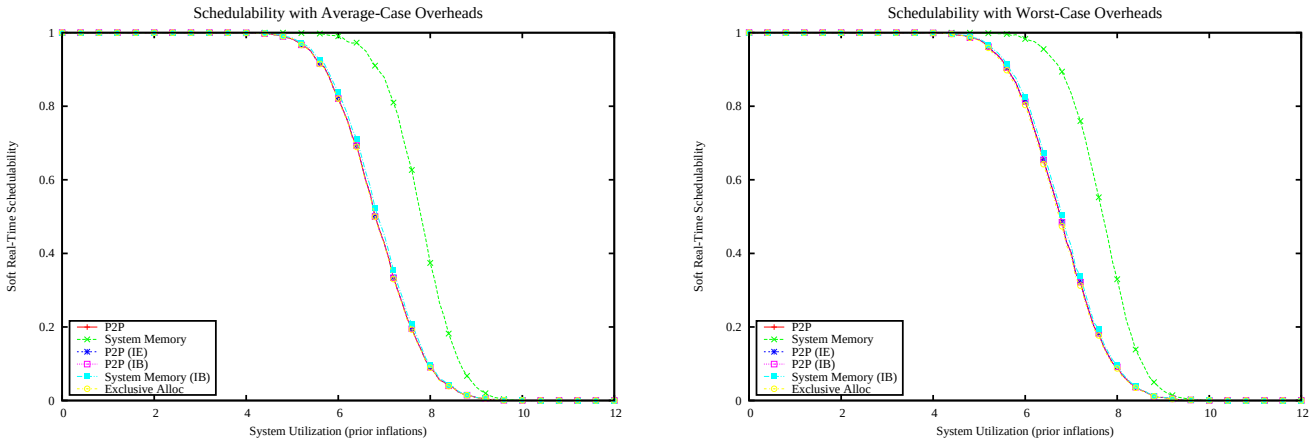

Figure 6752: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

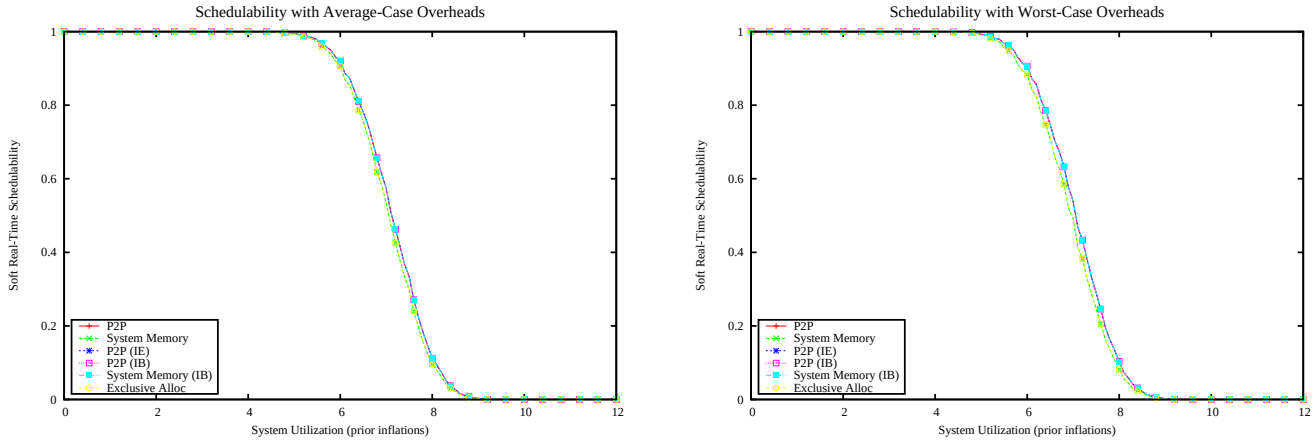

Figure 6753: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

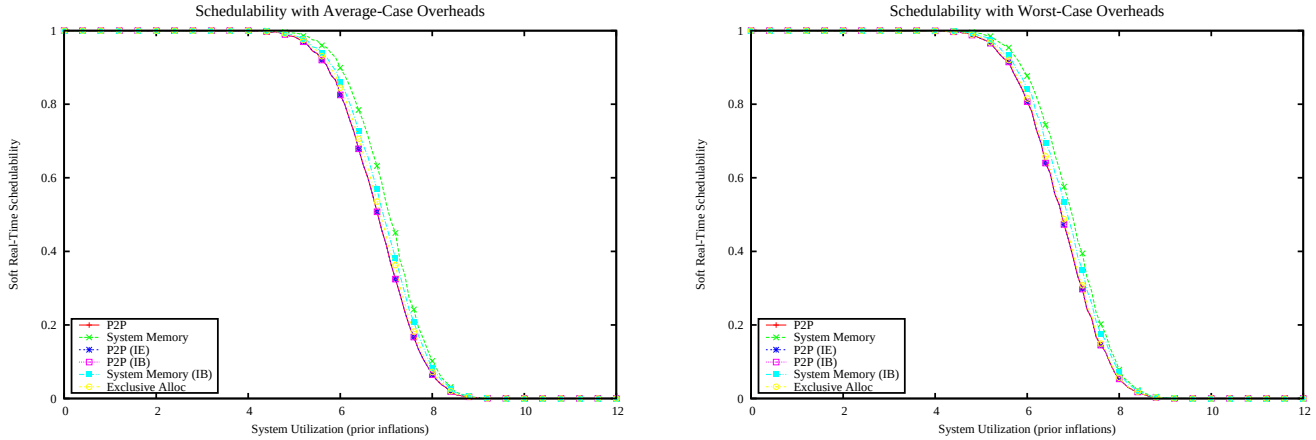

Figure 6754: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

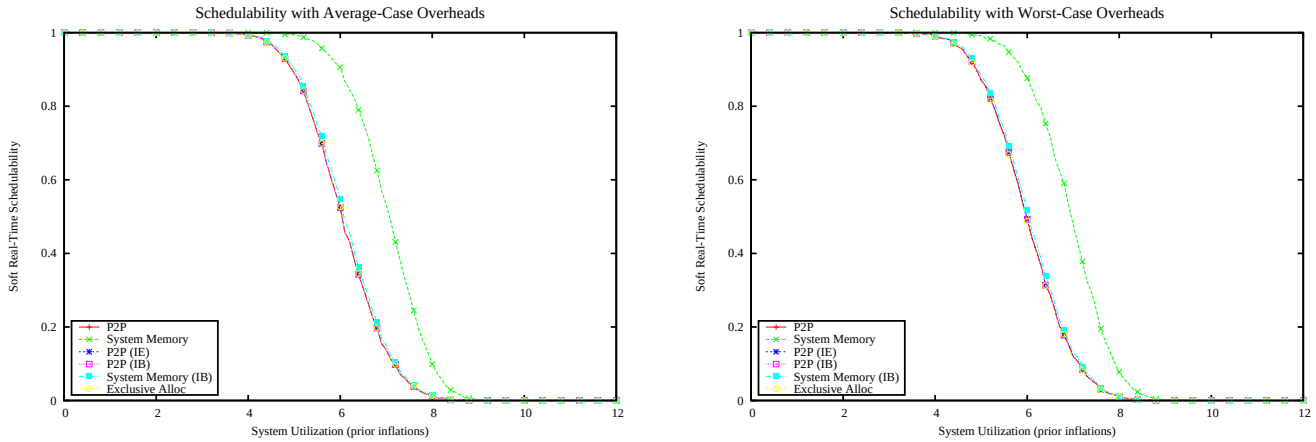

Figure 6755: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

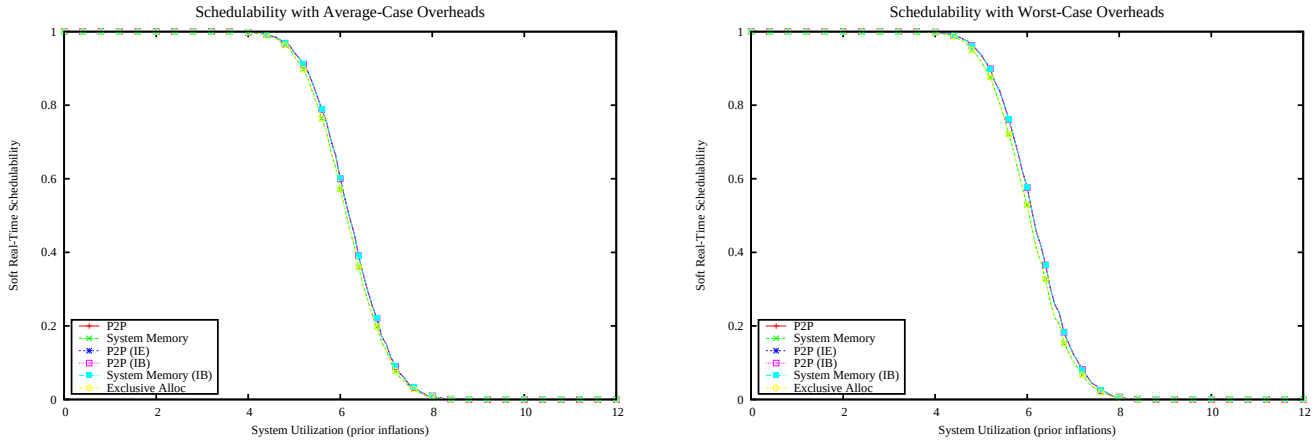

Figure 6756: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

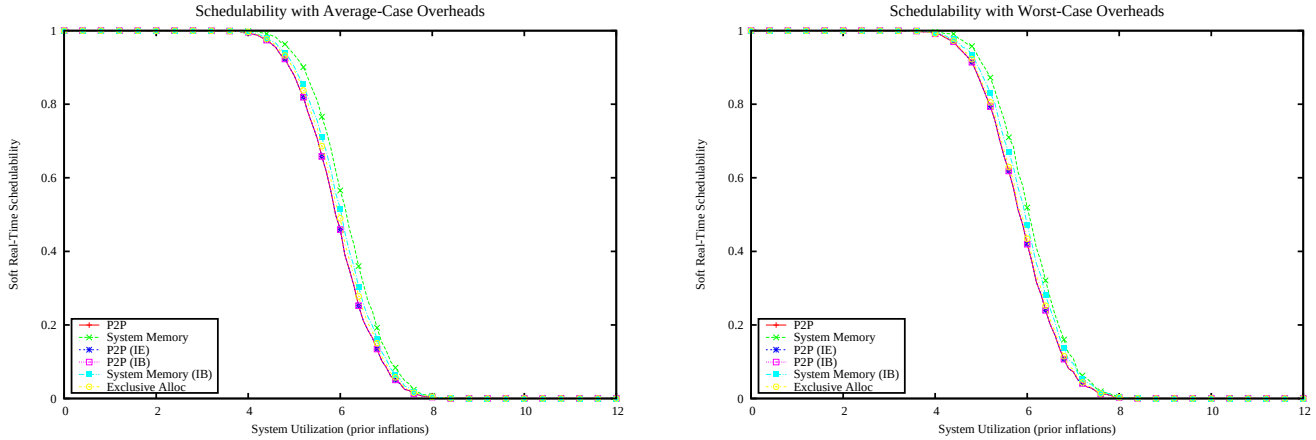

Figure 6757: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

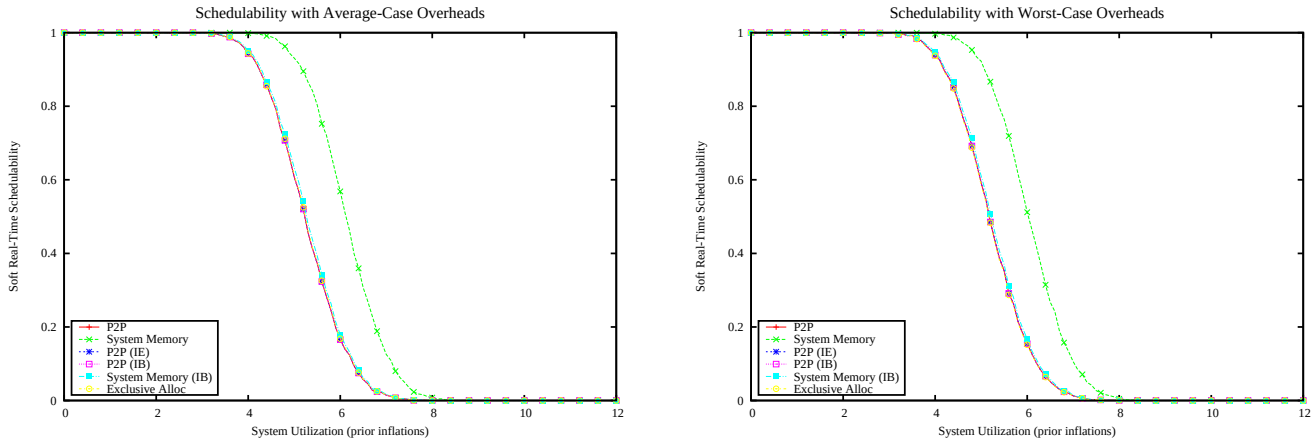

Figure 6758: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

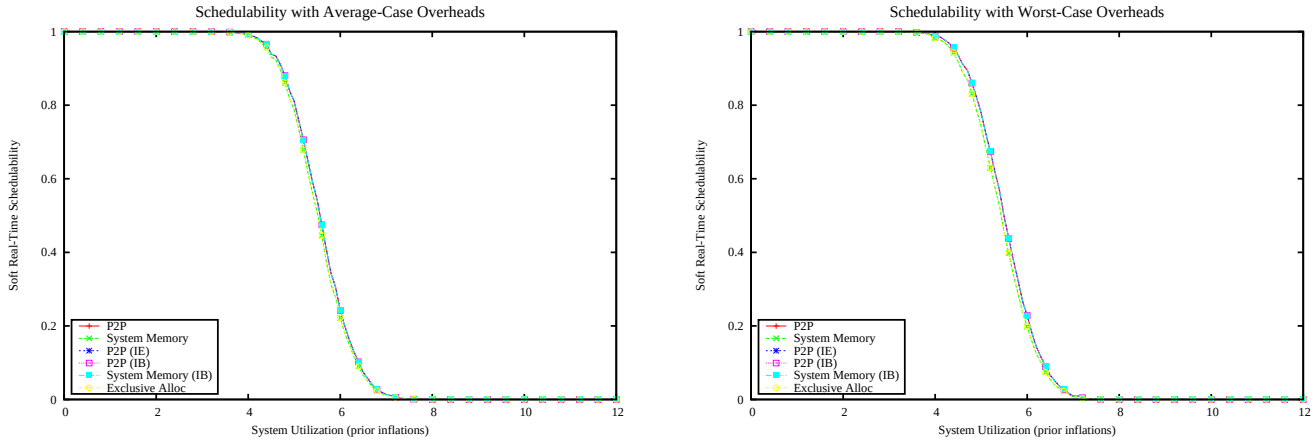

Figure 6759: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

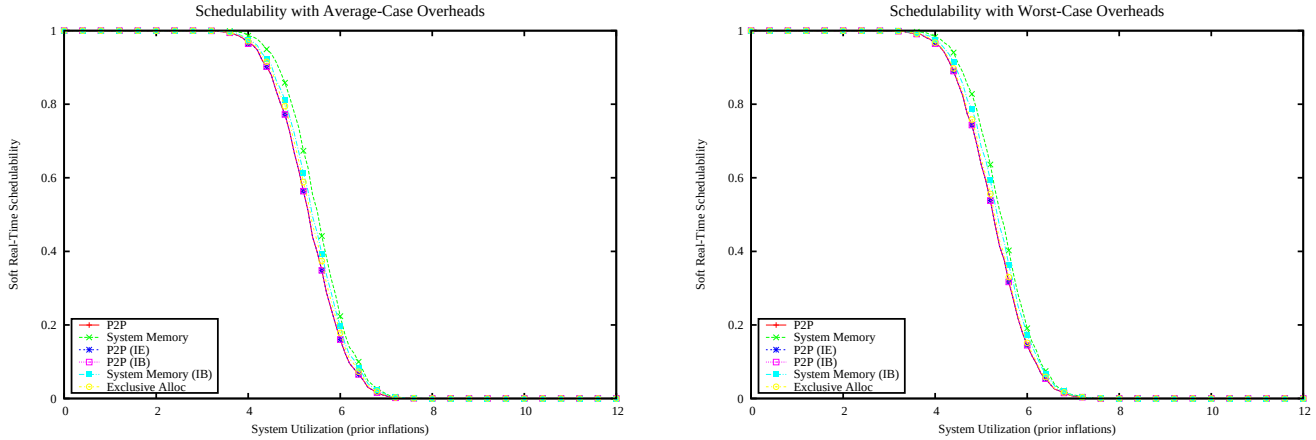

Figure 6760: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

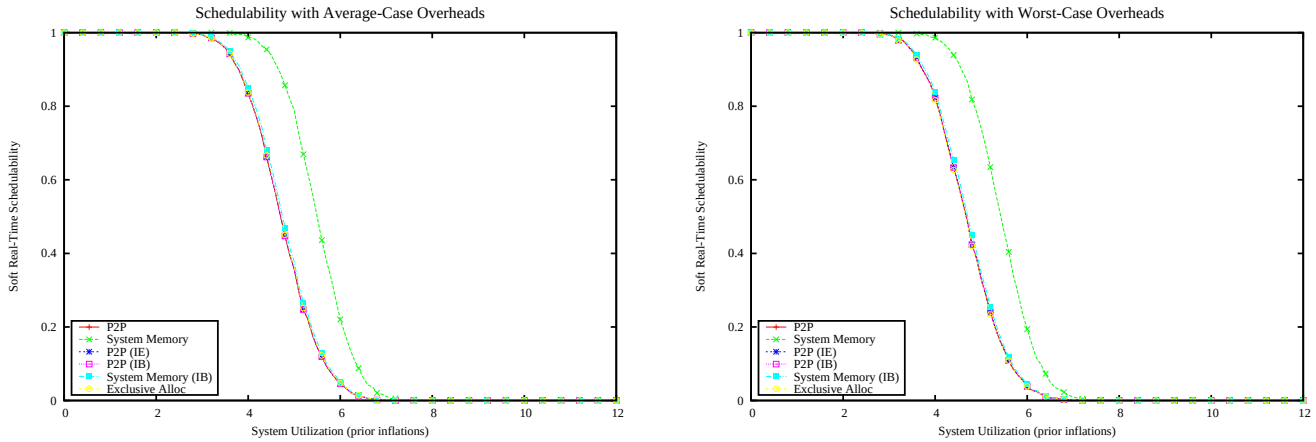

Figure 6761: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

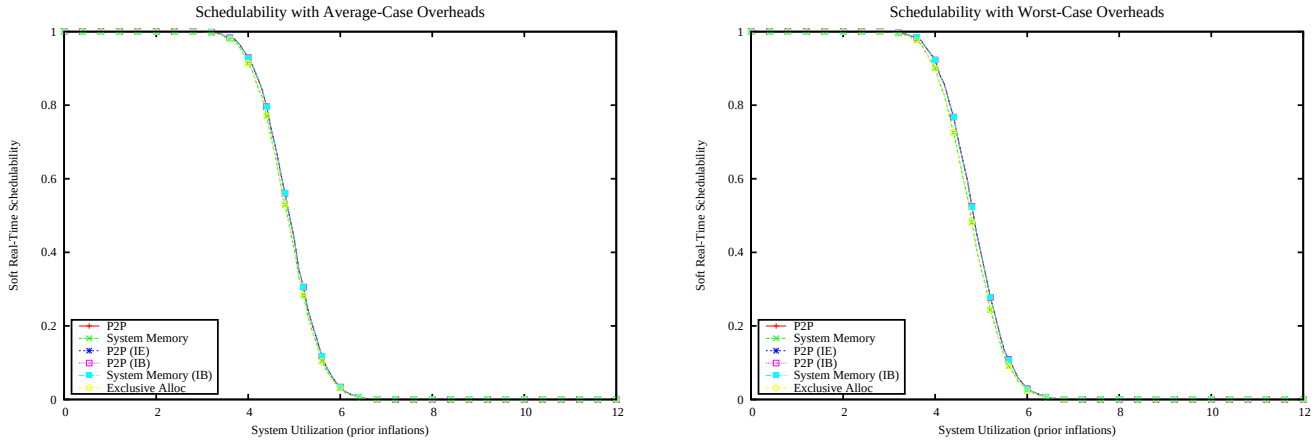

Figure 6762: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

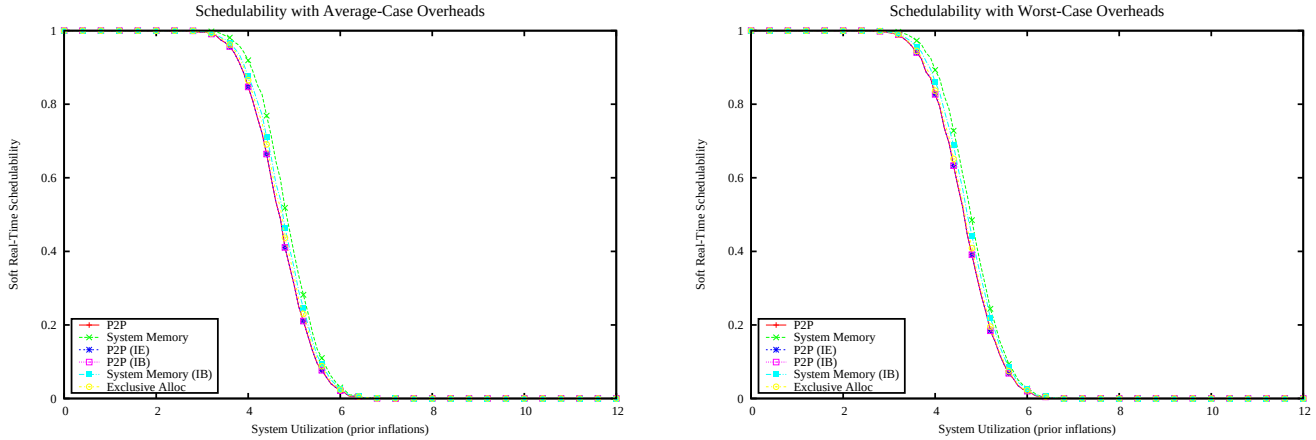

Figure 6763: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

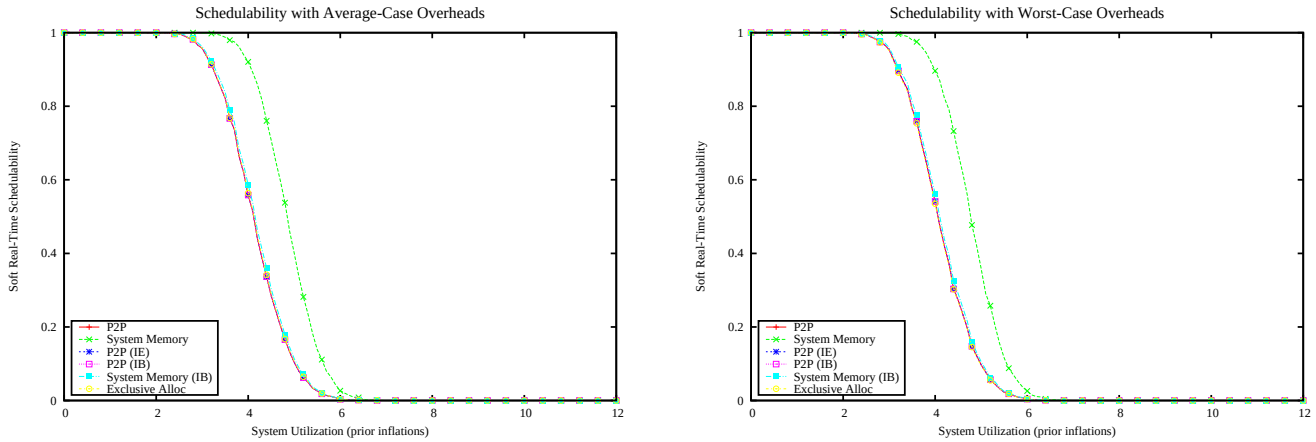

Figure 6764: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

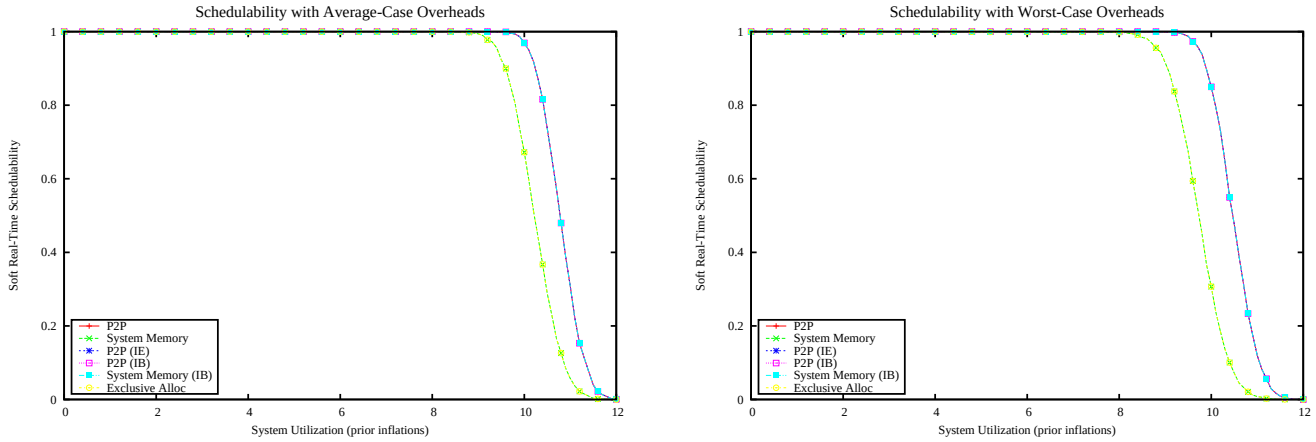

Figure 6765: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

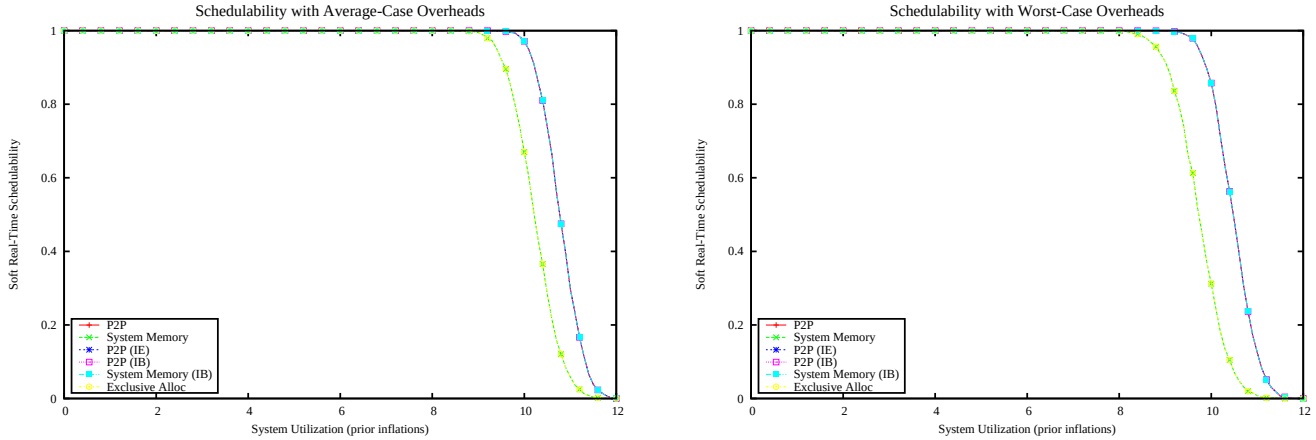

Figure 6766: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

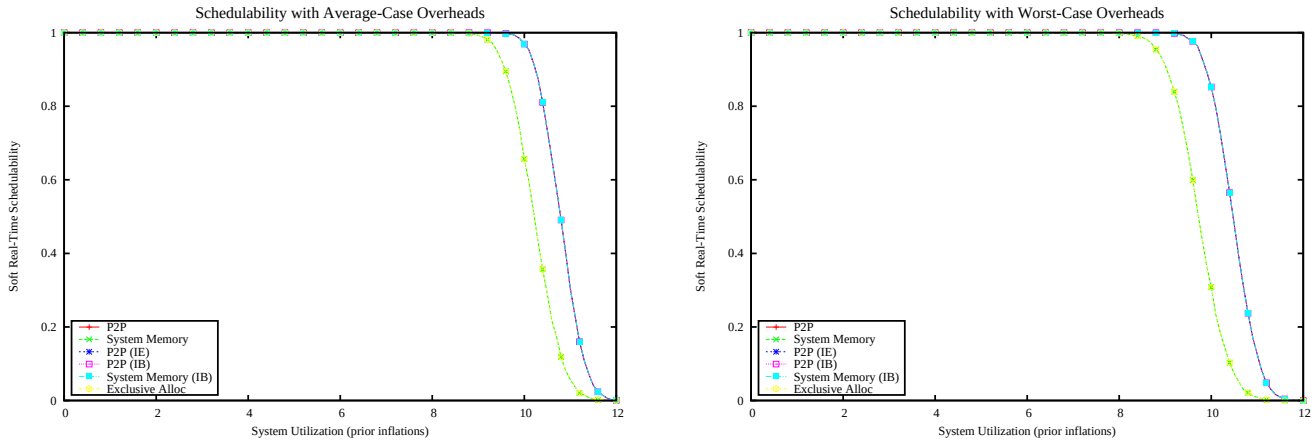

Figure 6767: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

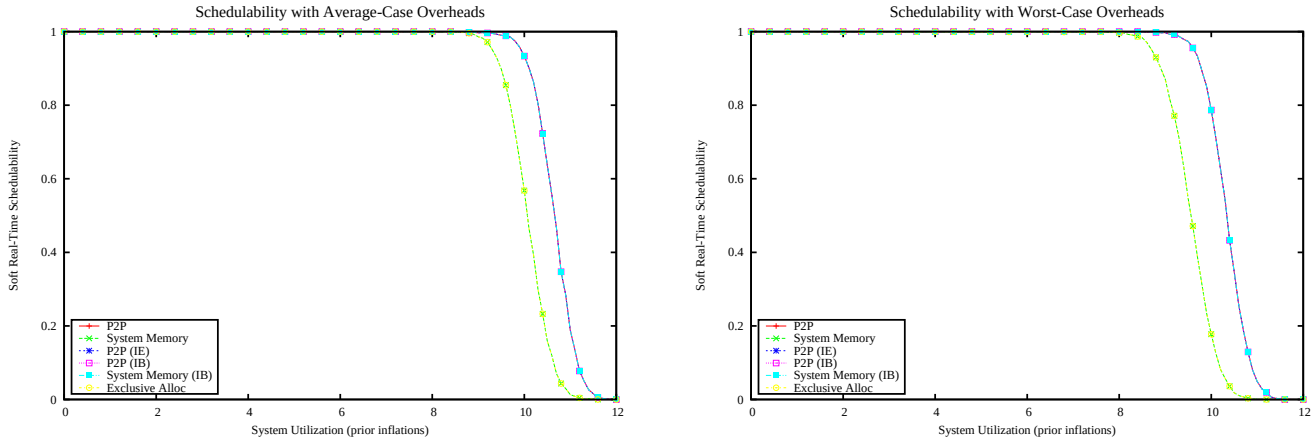

Figure 6768: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

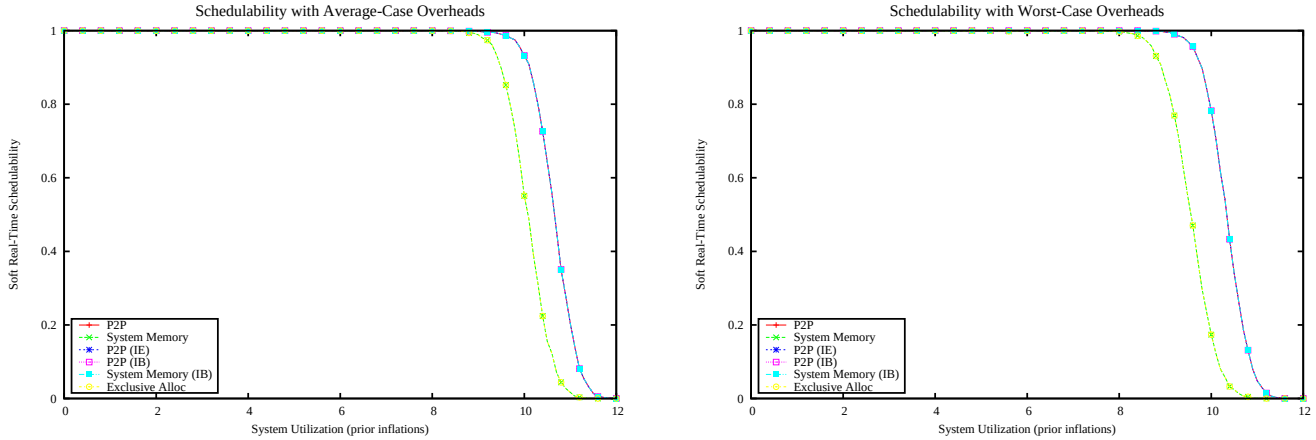

Figure 6769: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

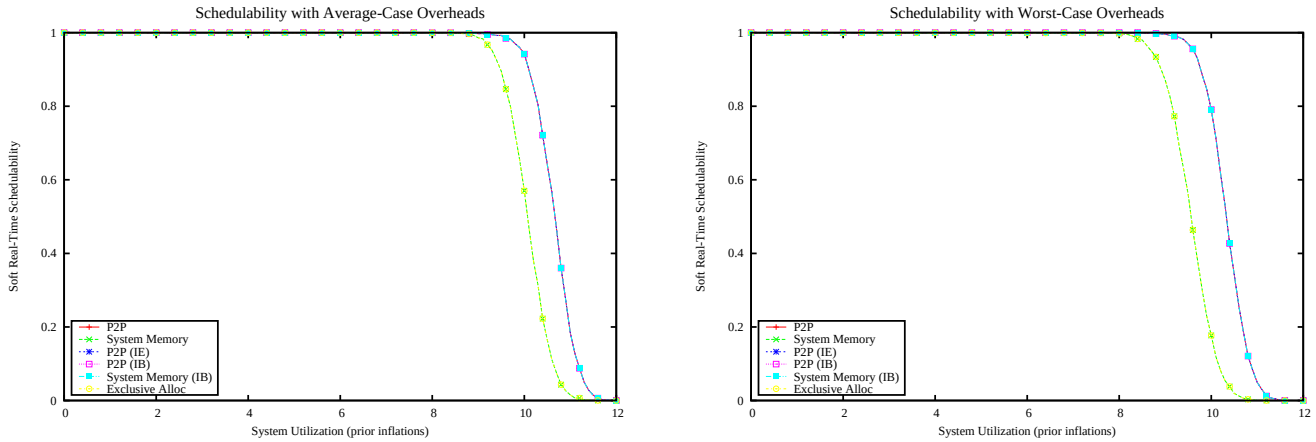

Figure 6770: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

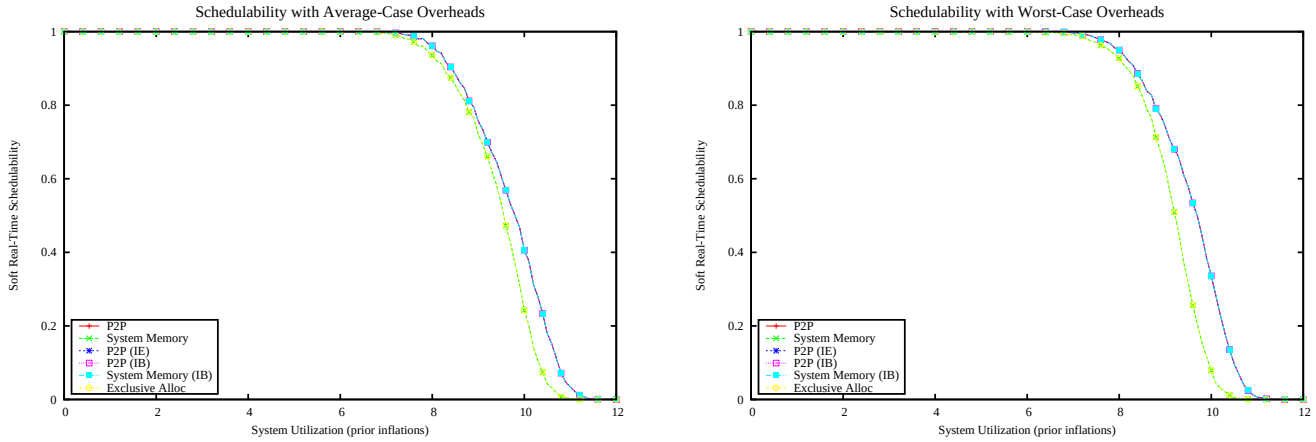

Figure 6771: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

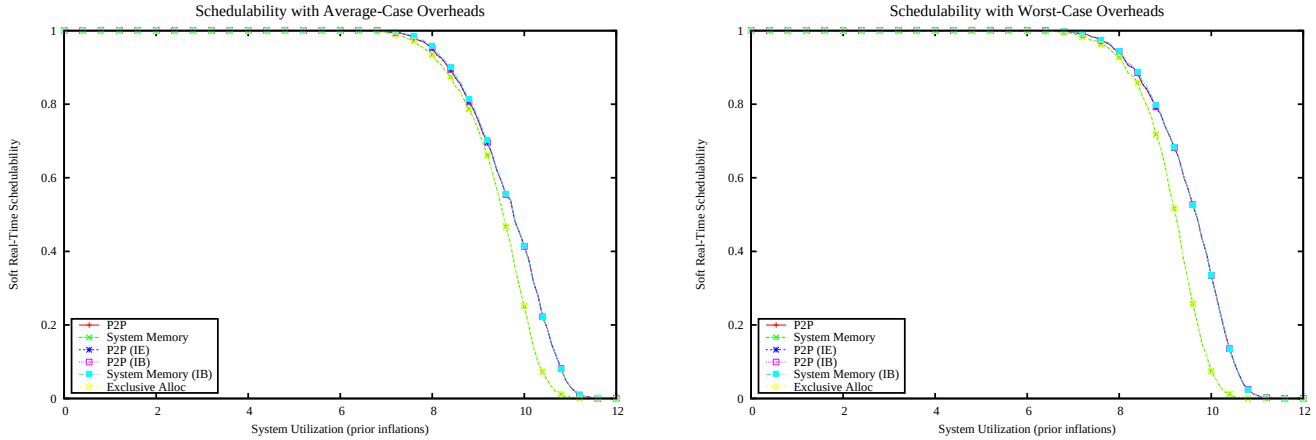

Figure 6772: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

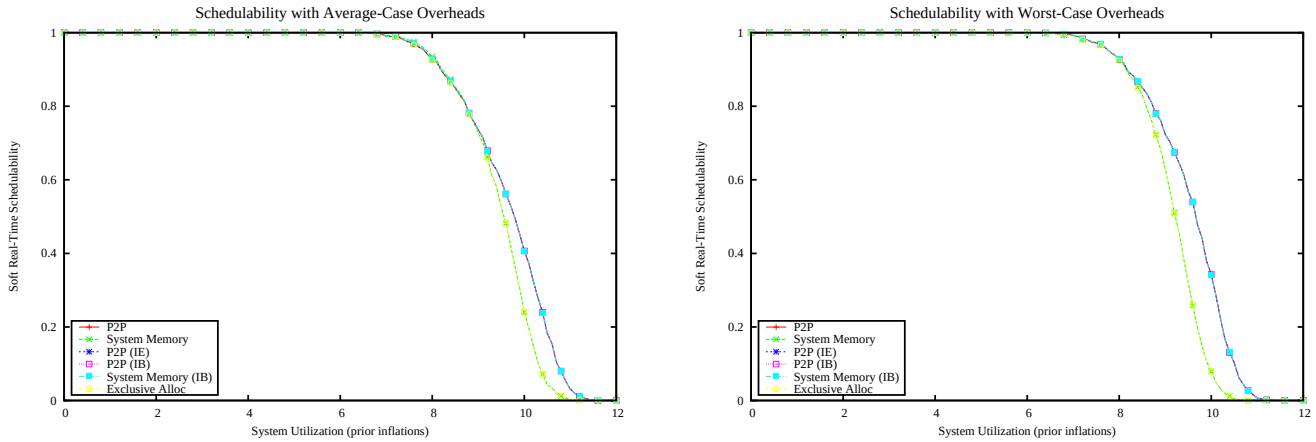

Figure 6773: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

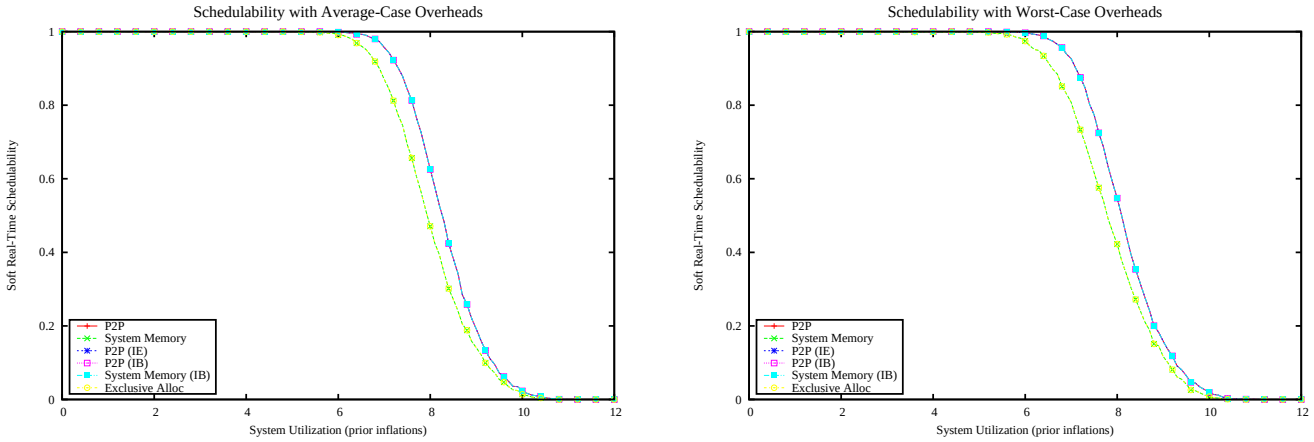

Figure 6774: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

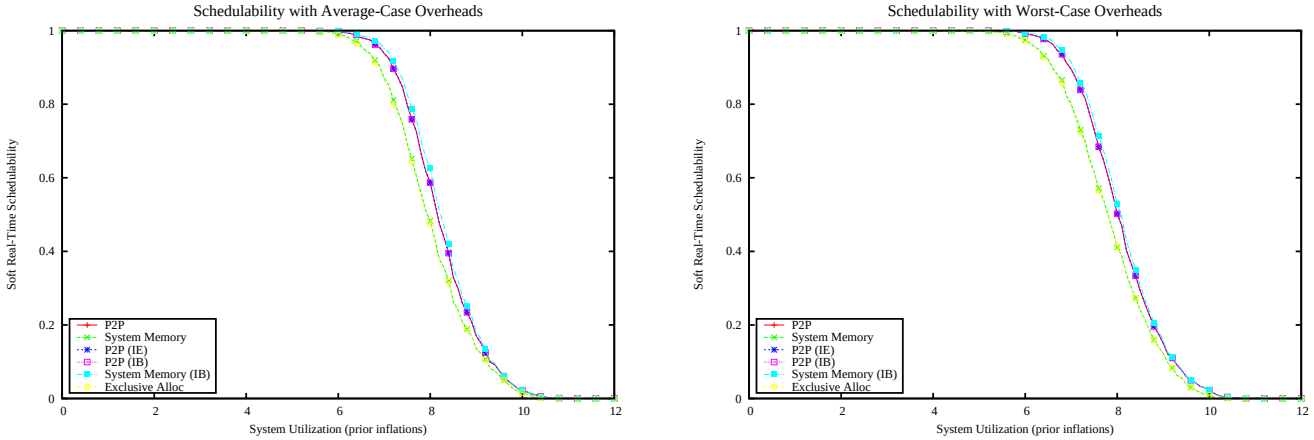

Figure 6775: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

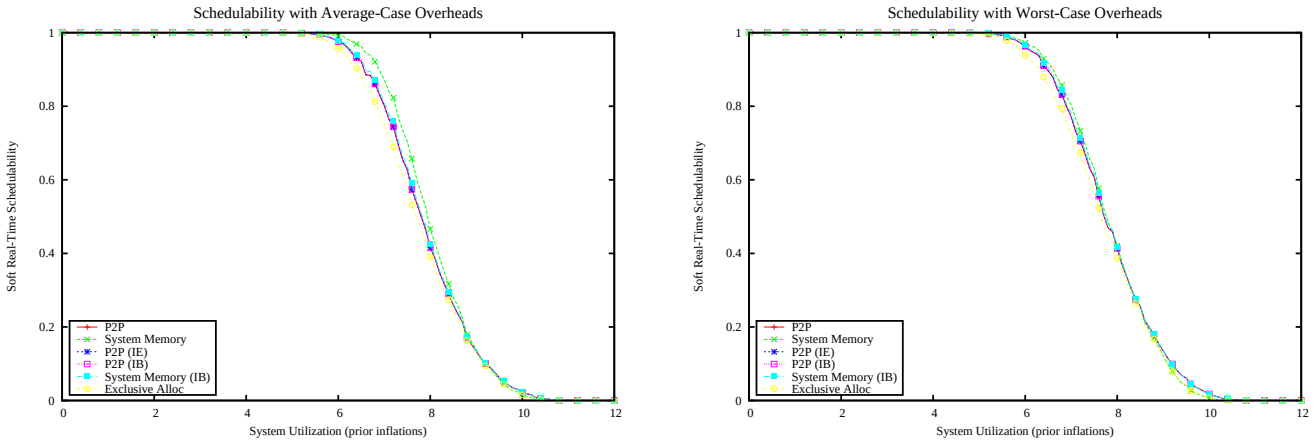

Figure 6776: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

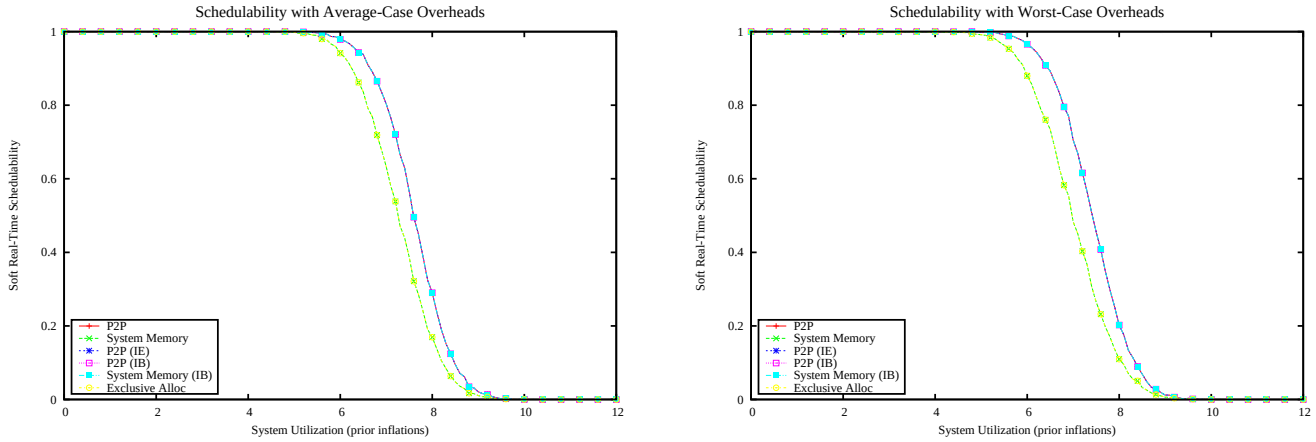

Figure 6777: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

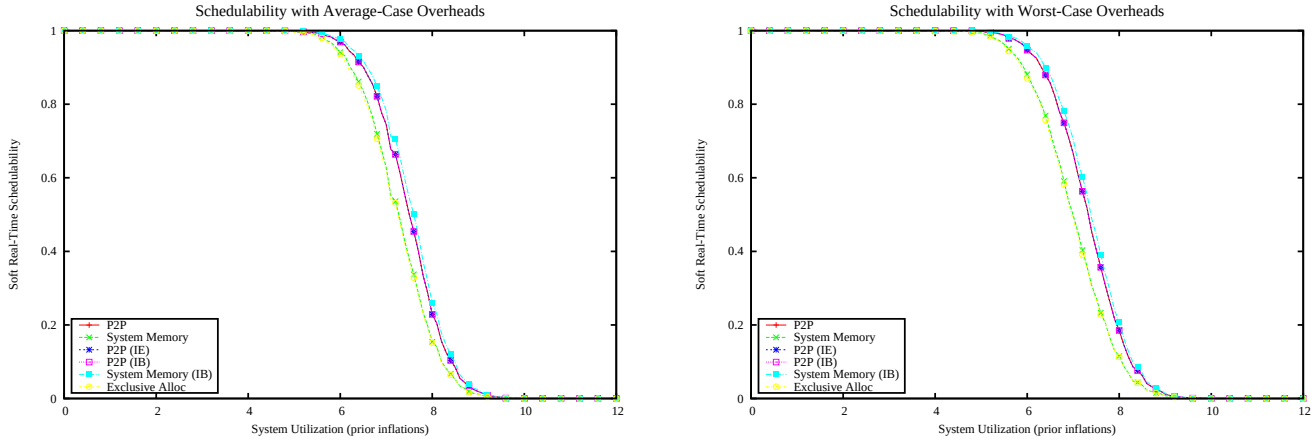

Figure 6778: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

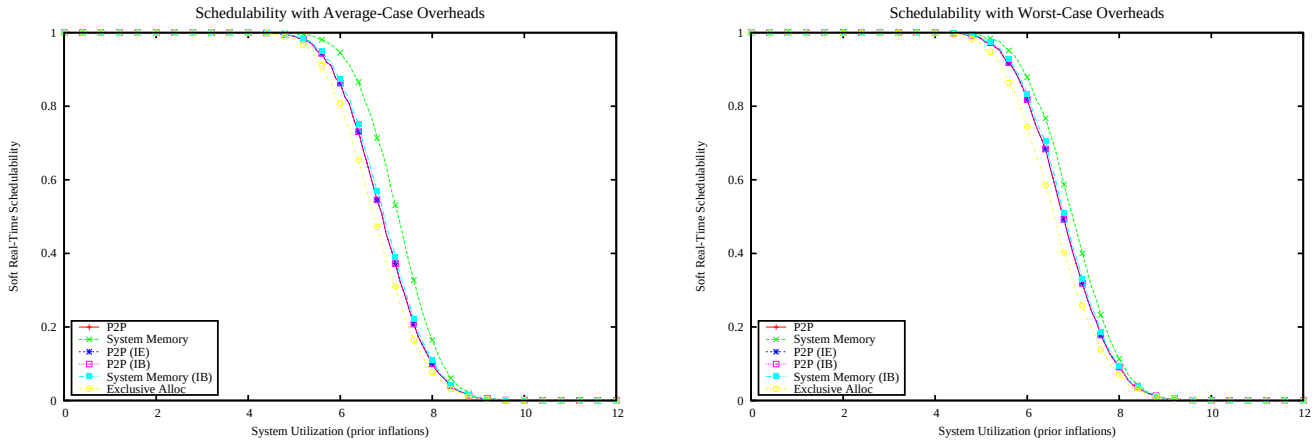

Figure 6779: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

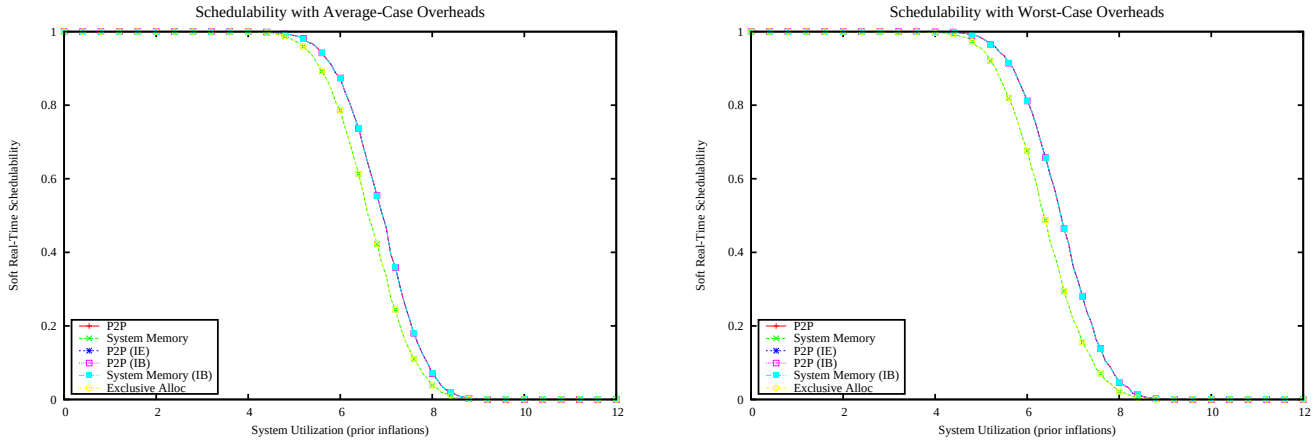

Figure 6780: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

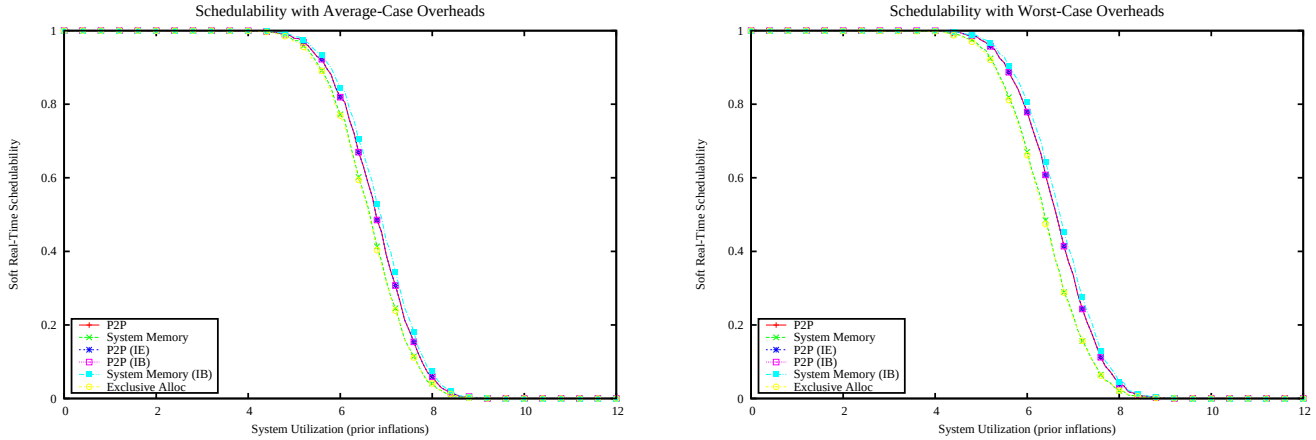

Figure 6781: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

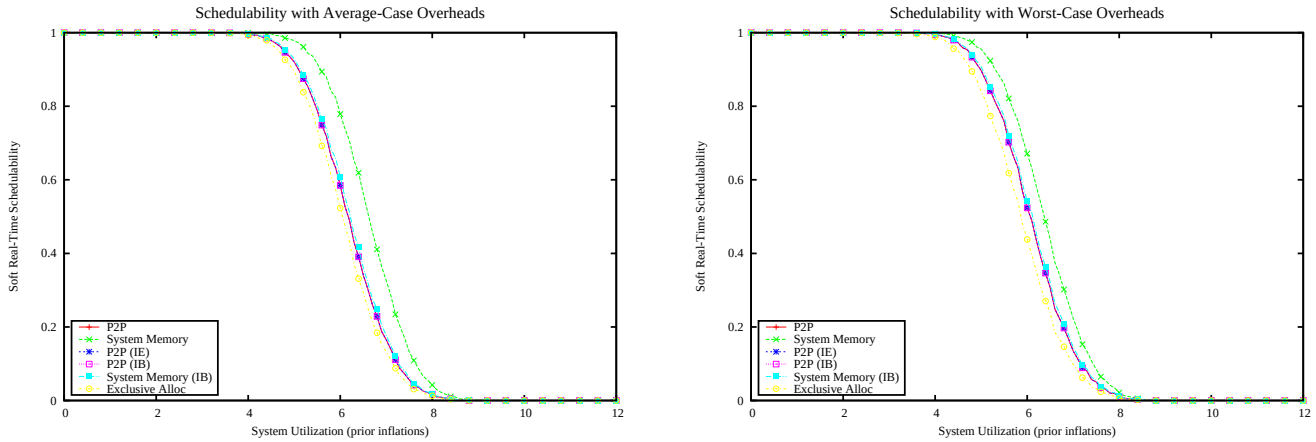

Figure 6782: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

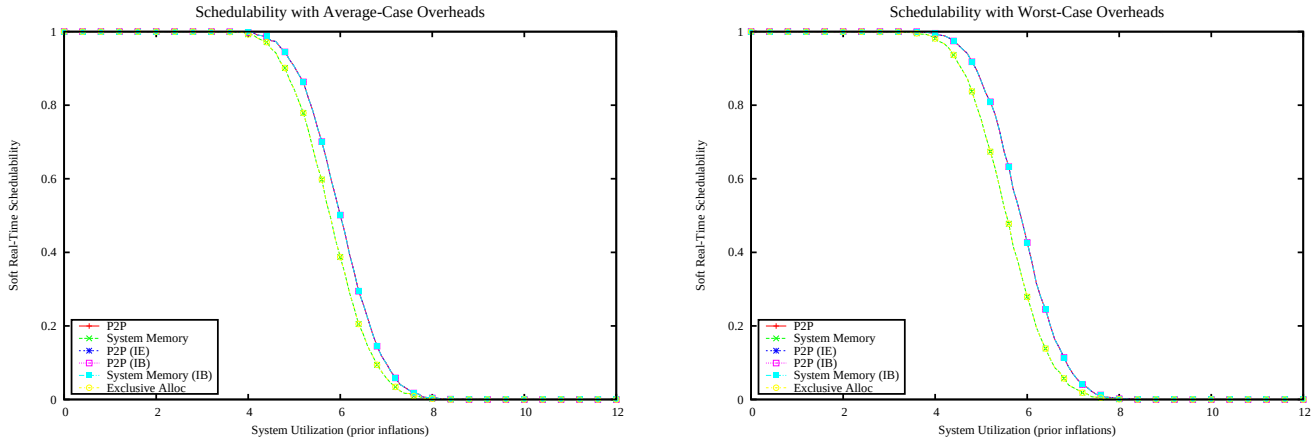

Figure 6783: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

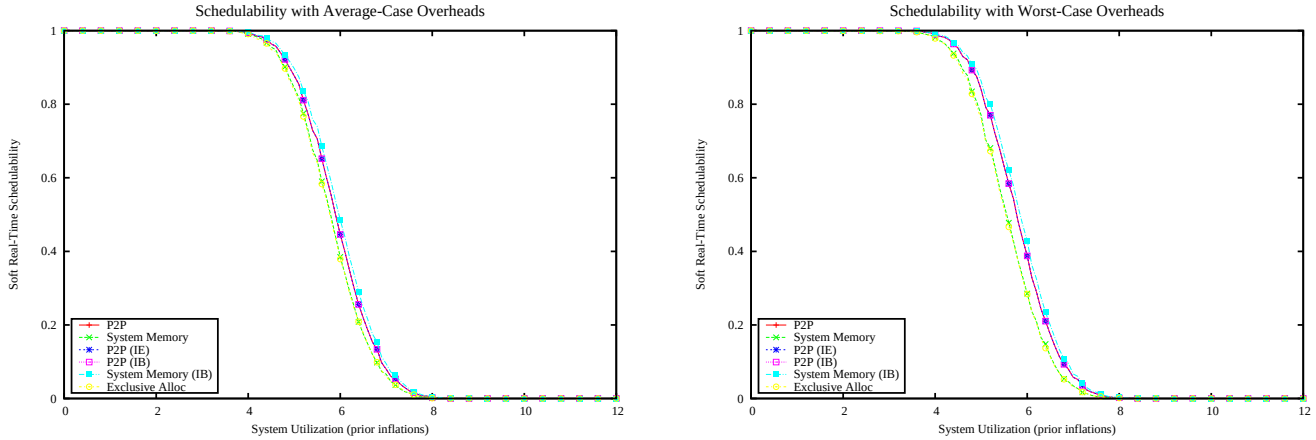

Figure 6784: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

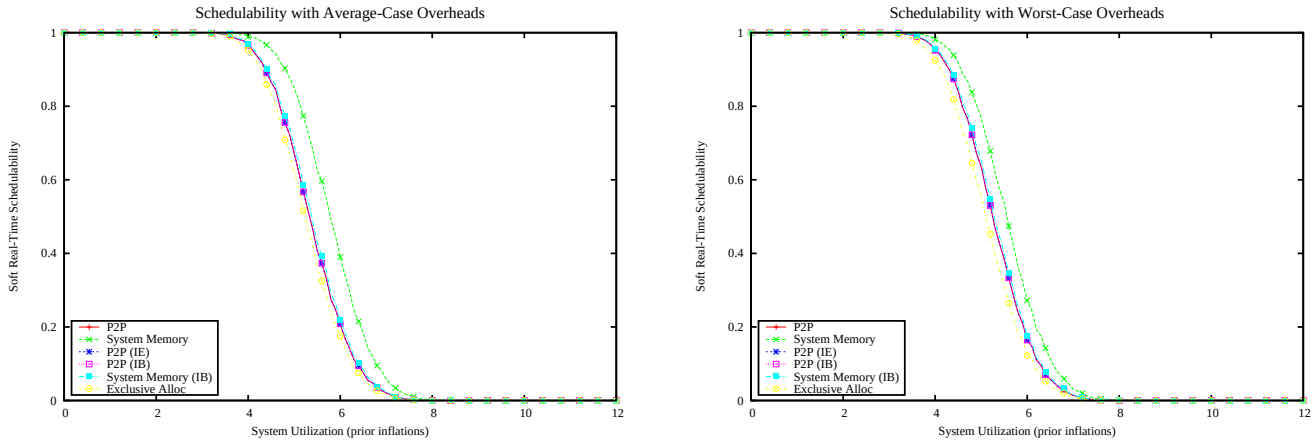

Figure 6785: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

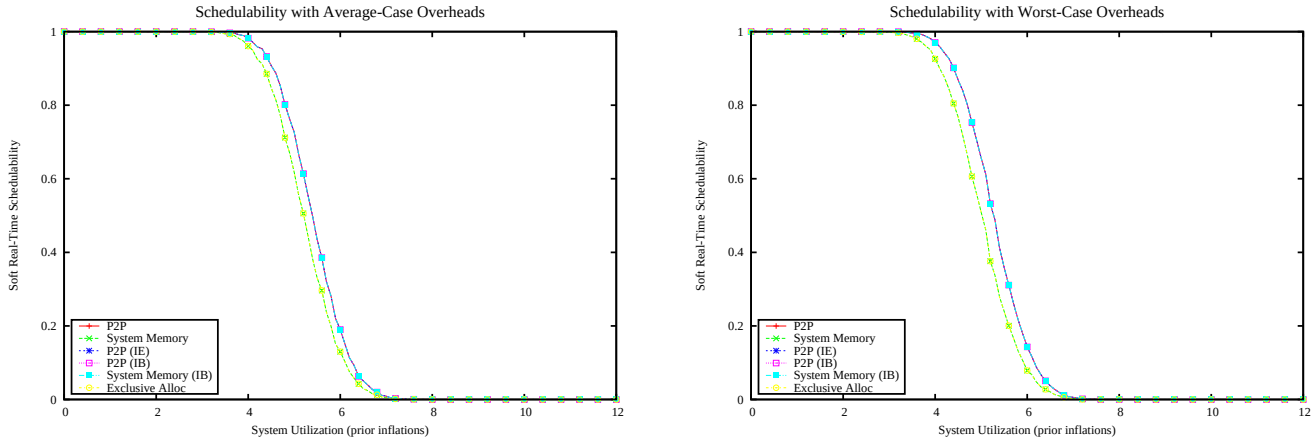

Figure 6786: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

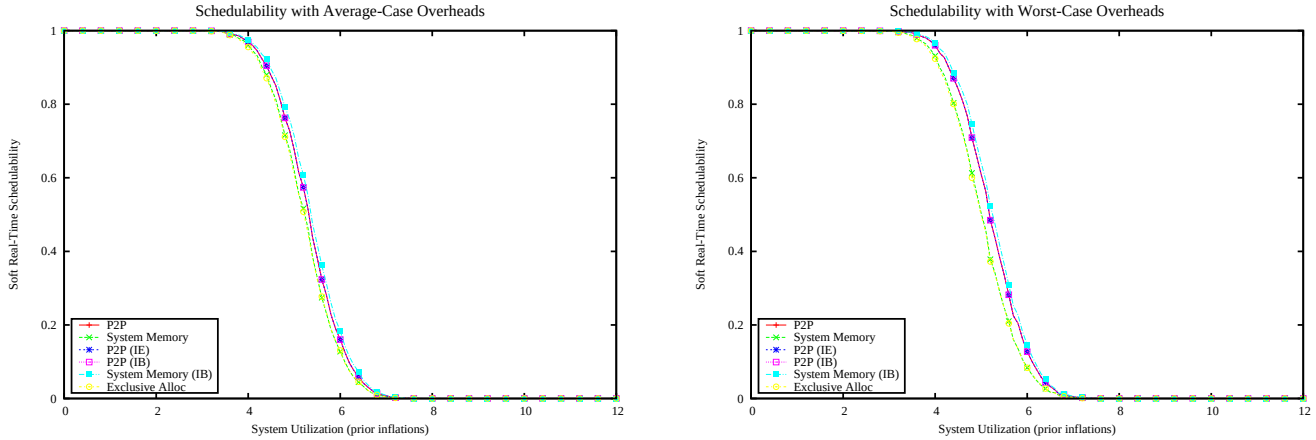

Figure 6787: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

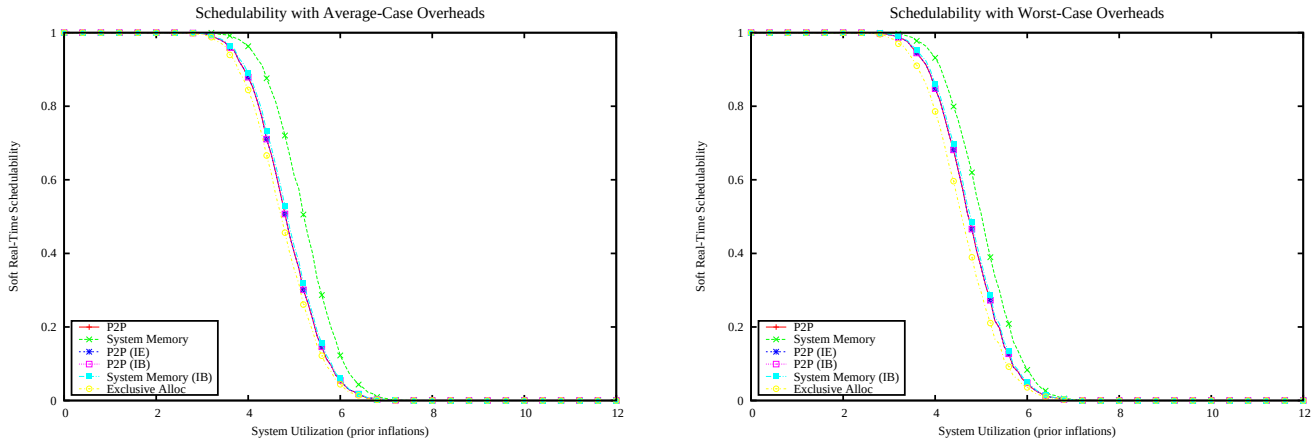

Figure 6788: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

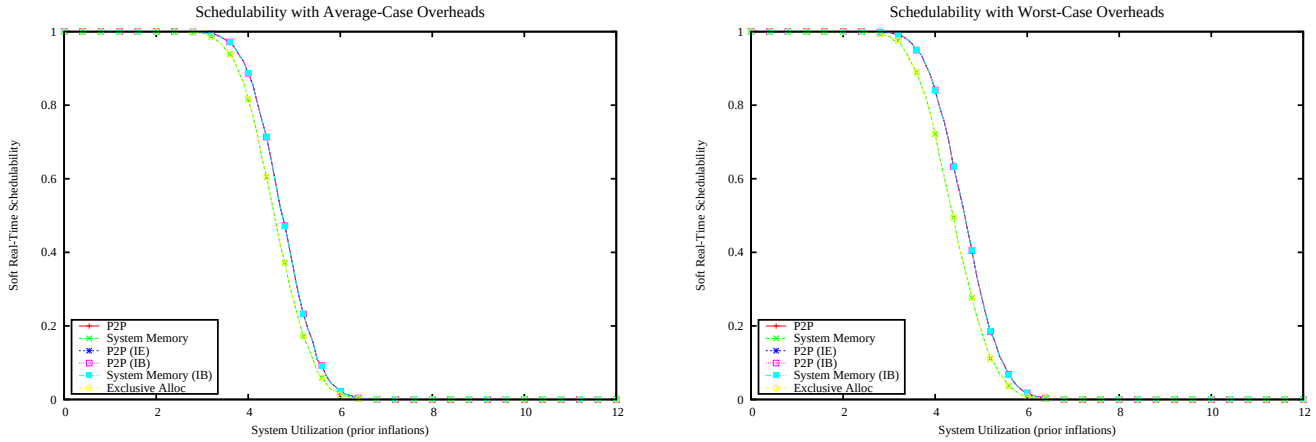

Figure 6789: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

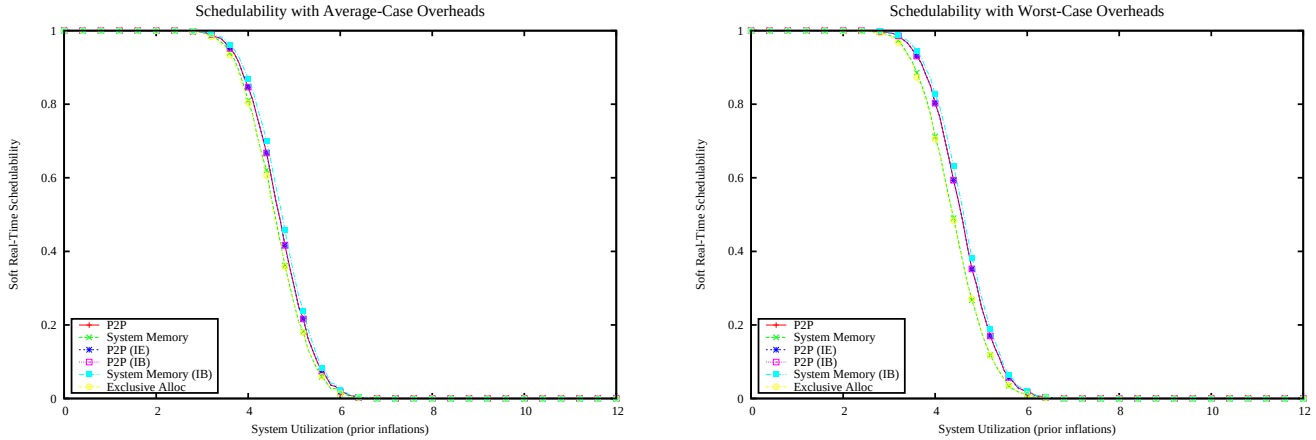

Figure 6790: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

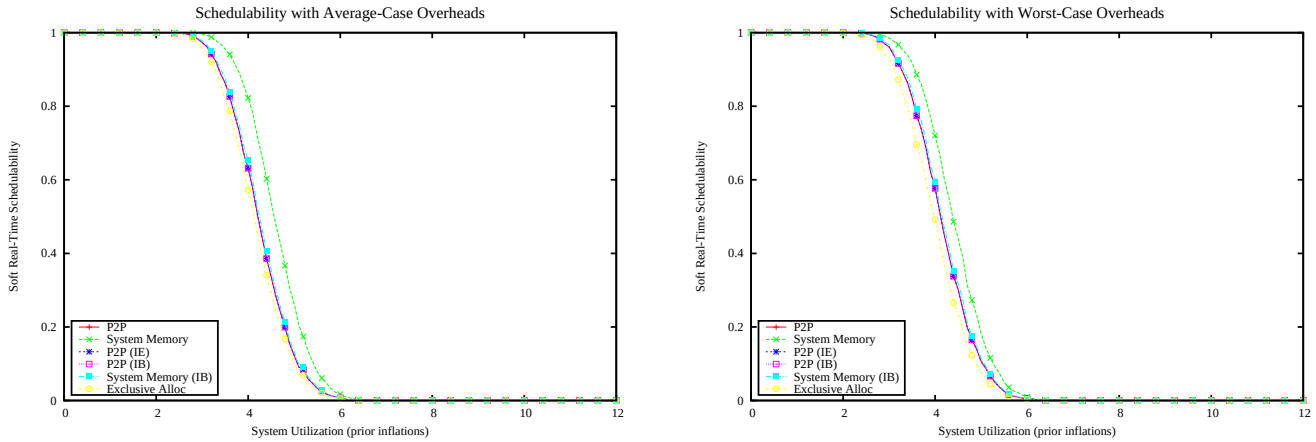

Figure 6791: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

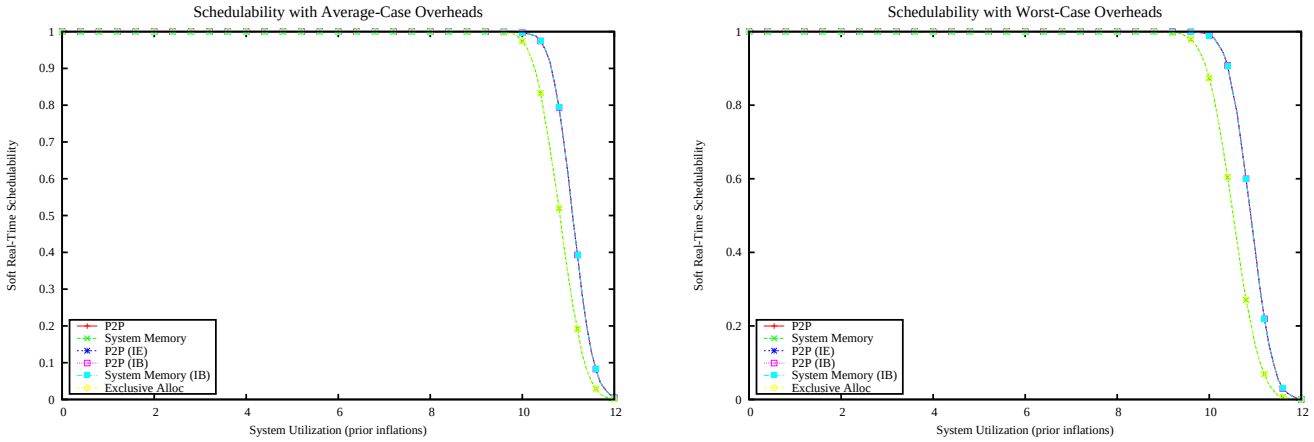

Figure 6792: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

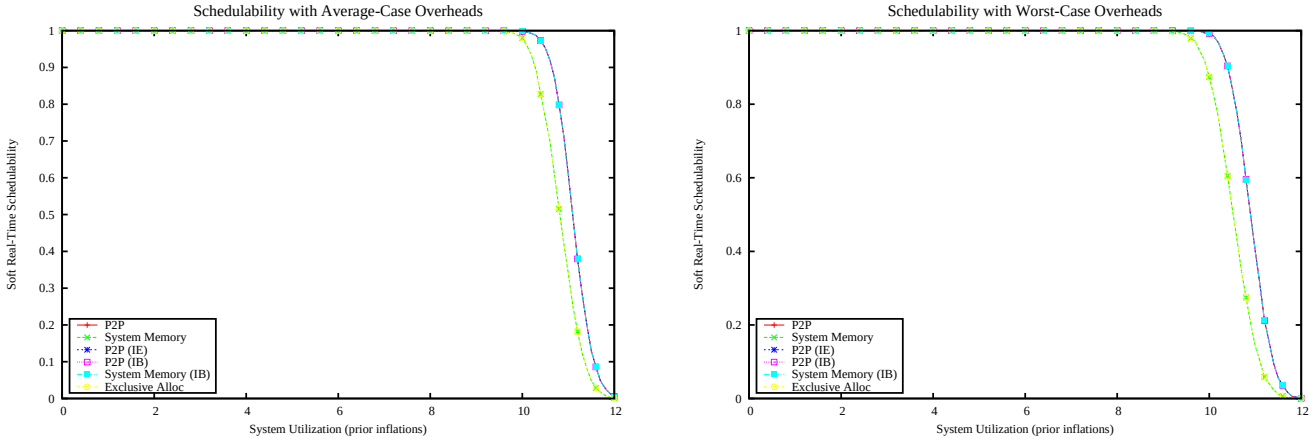

Figure 6793: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

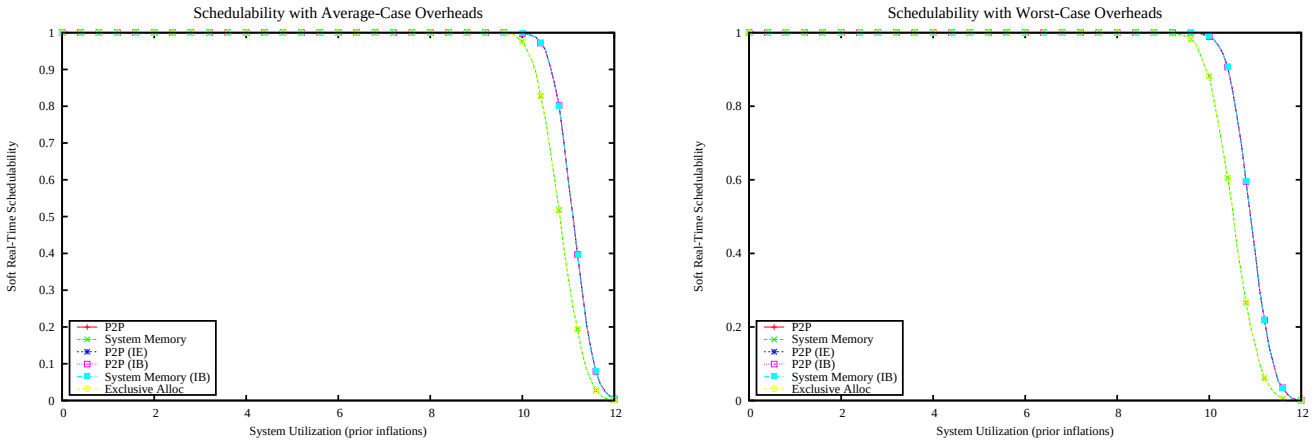

Figure 6794: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

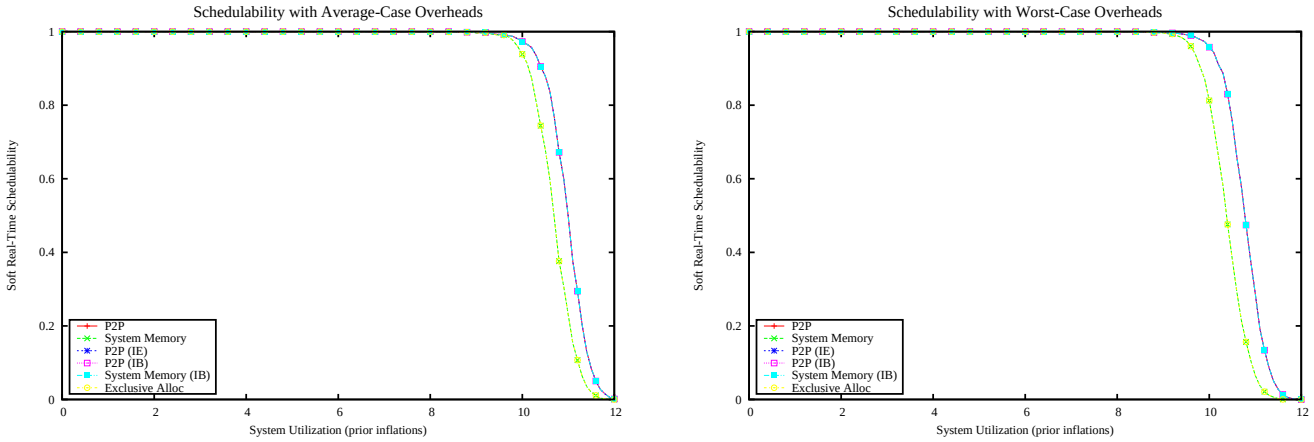

Figure 6795: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

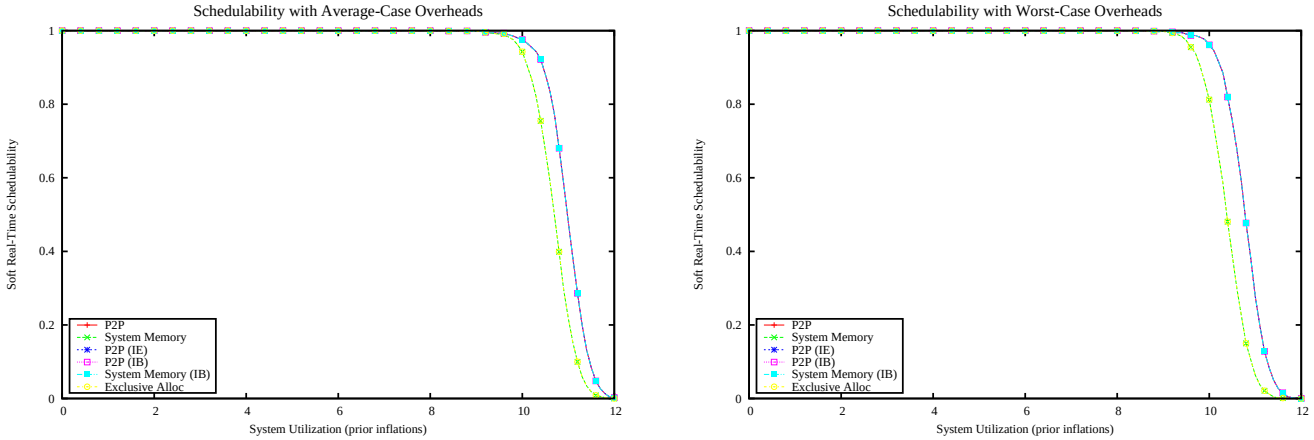

Figure 6796: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

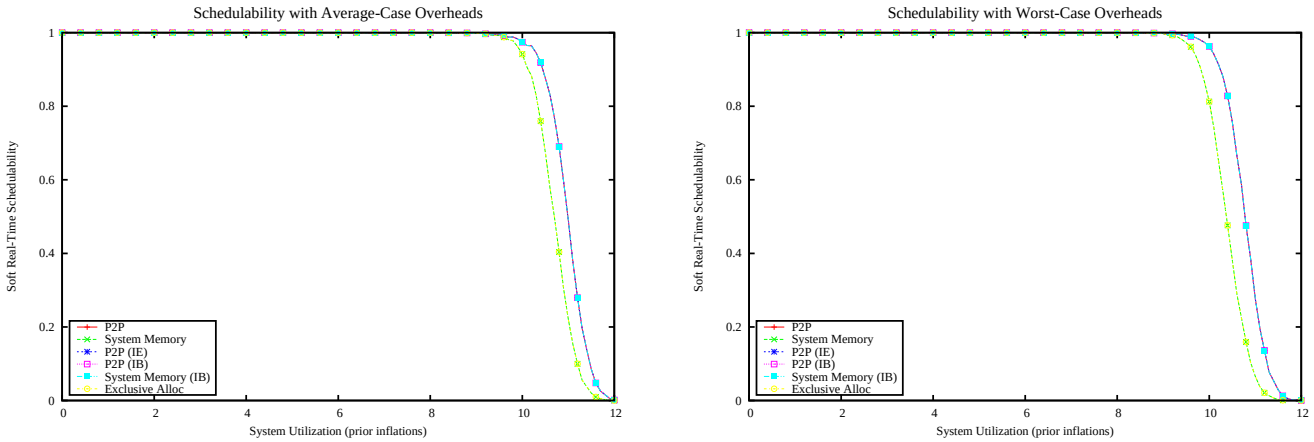

Figure 6797: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

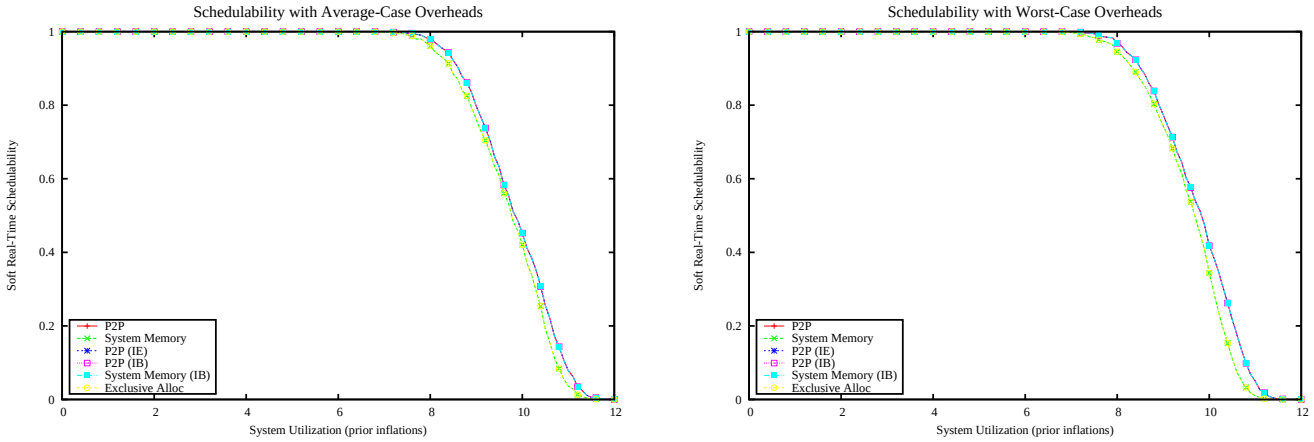

Figure 6798: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

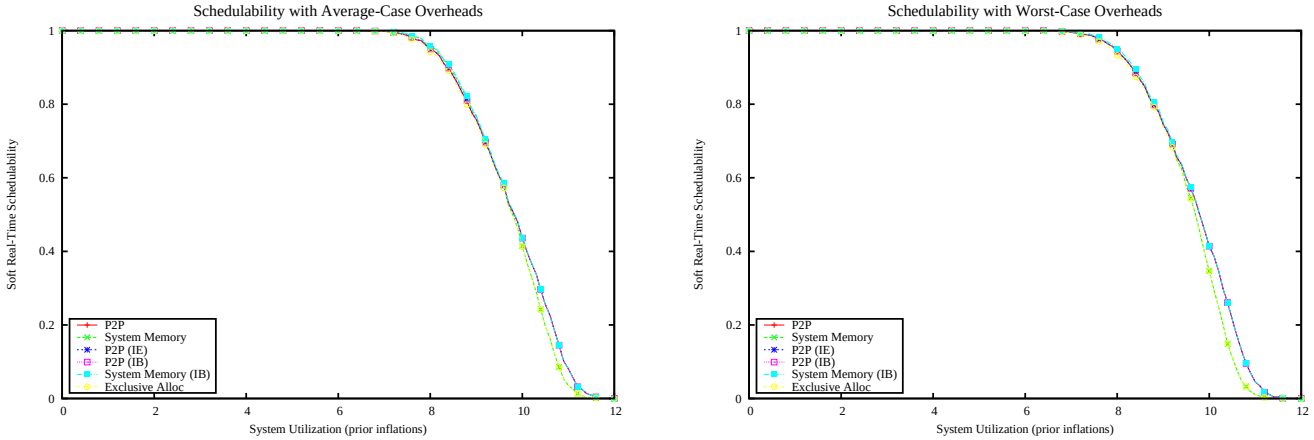

Figure 6799: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

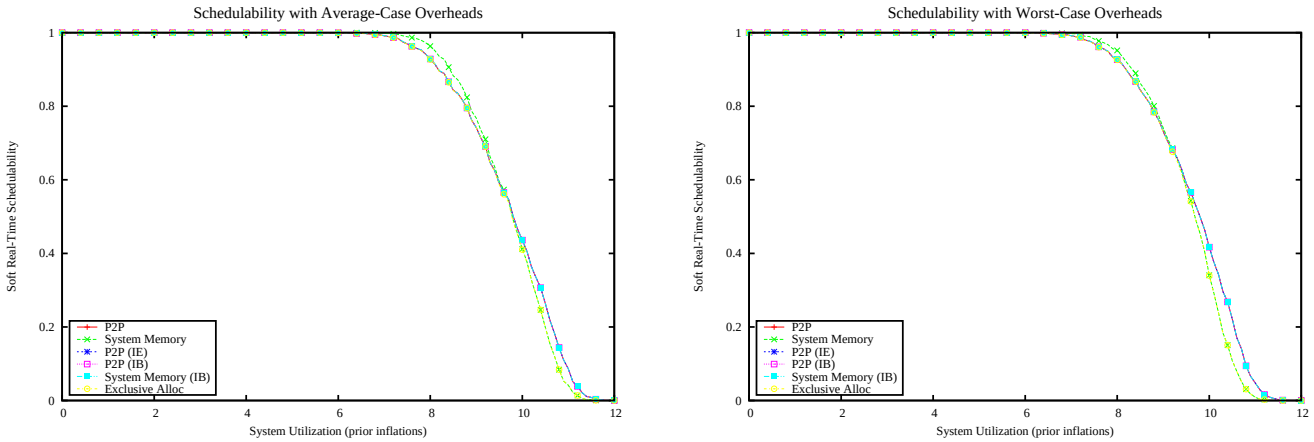

Figure 6800: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

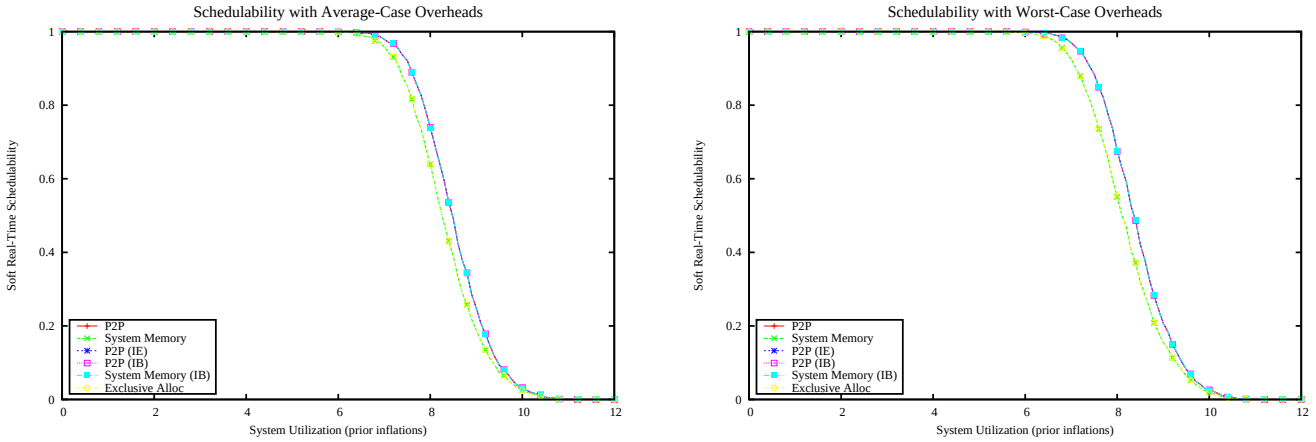

Figure 6801: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

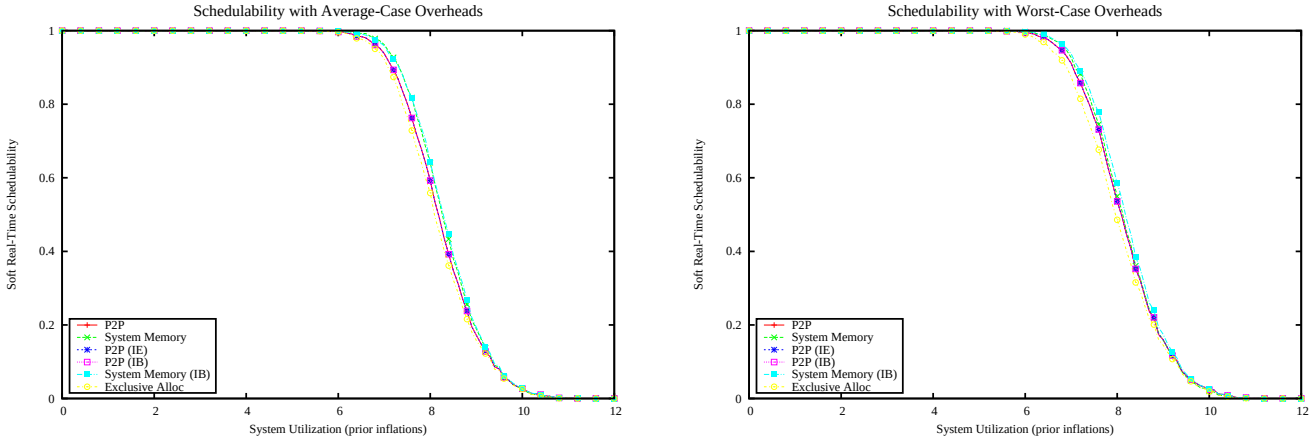

Figure 6802: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

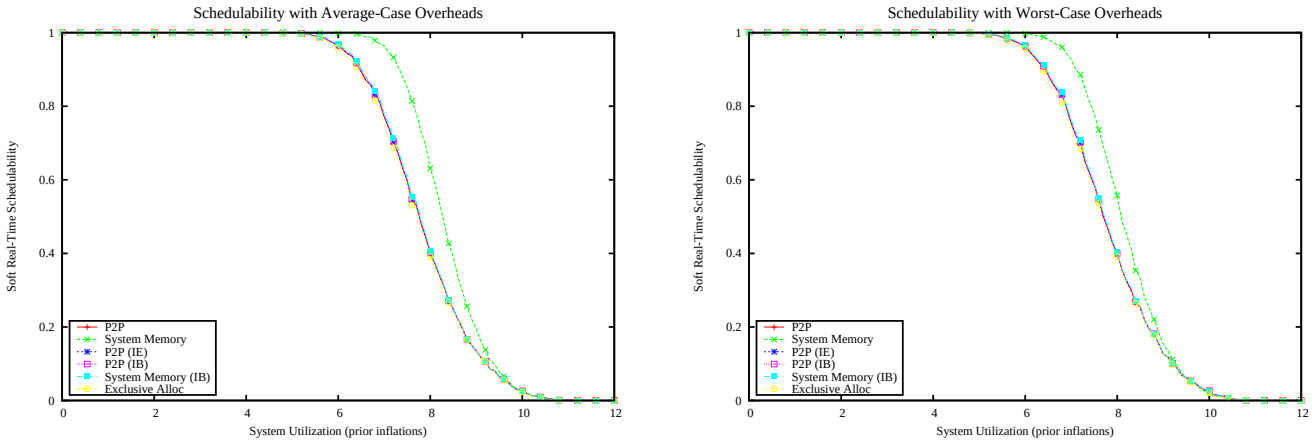

Figure 6803: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

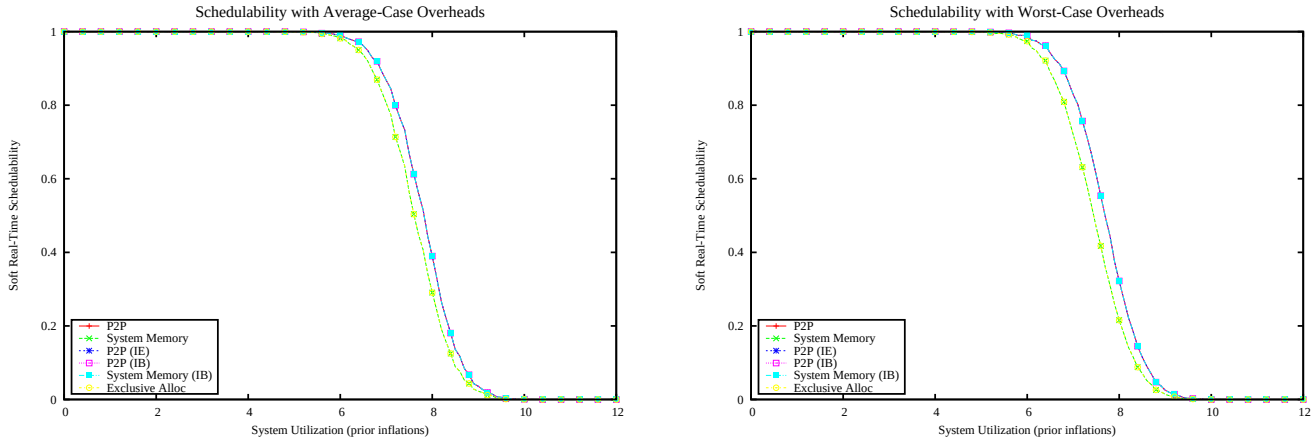

Figure 6804: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

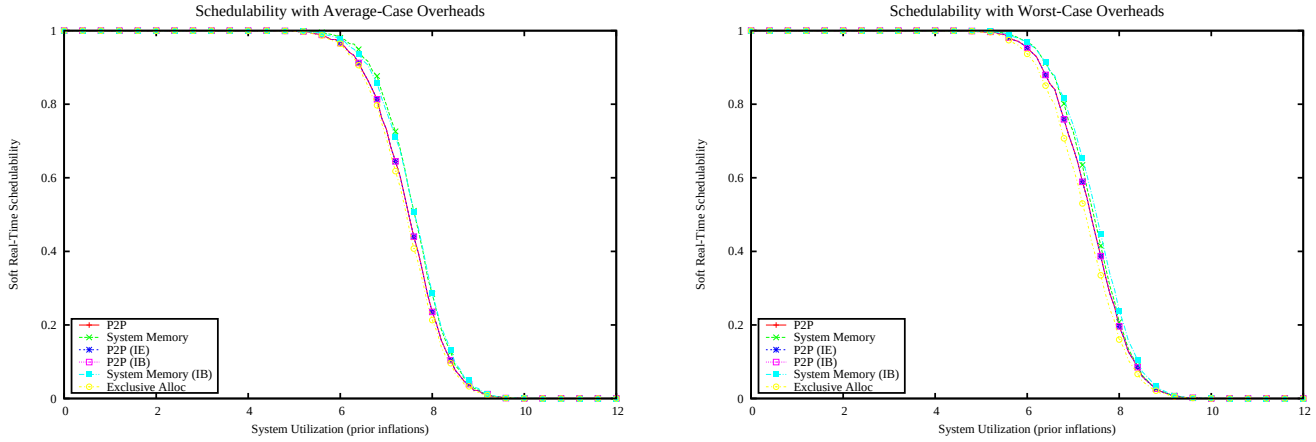

Figure 6805: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

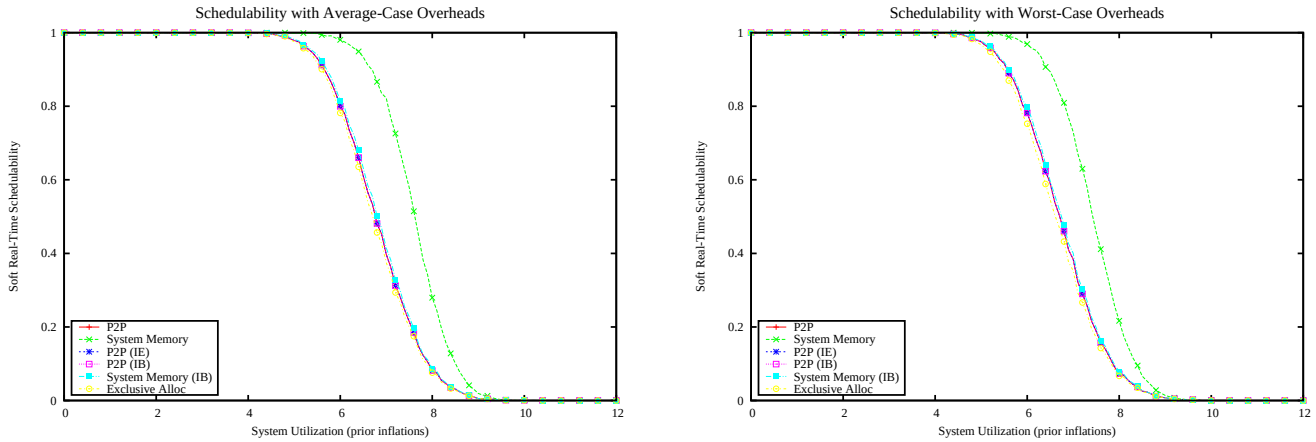

Figure 6806: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

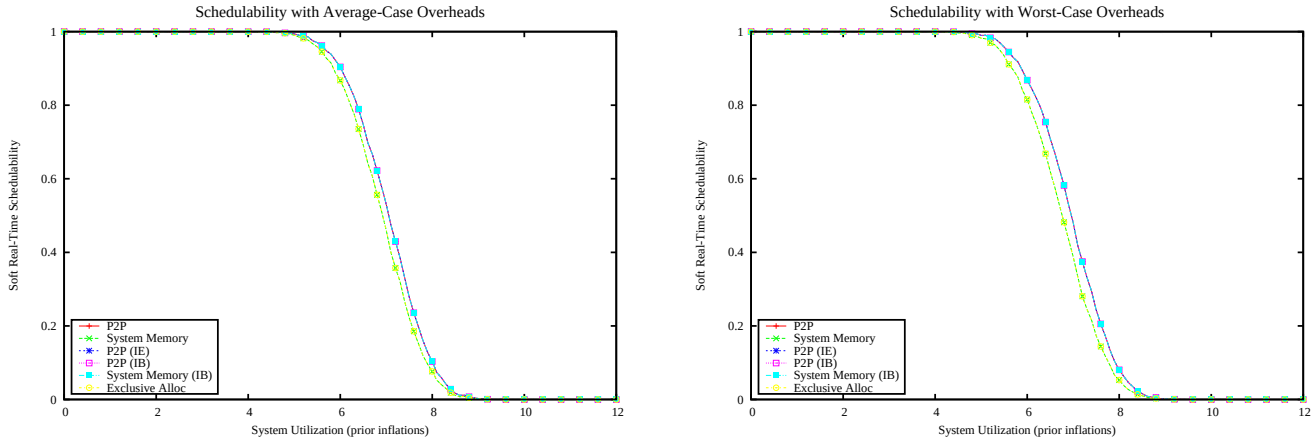

Figure 6807: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

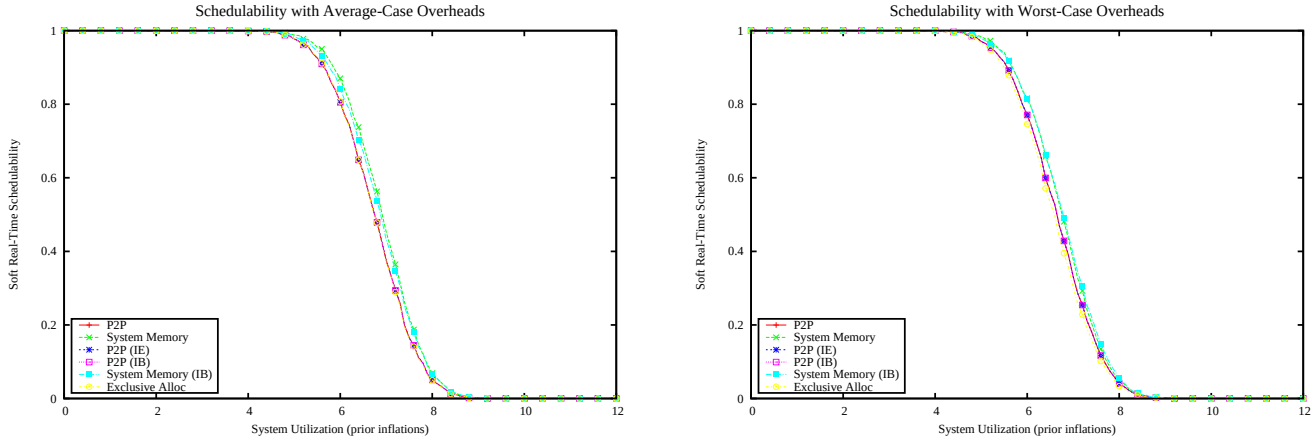

Figure 6808: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

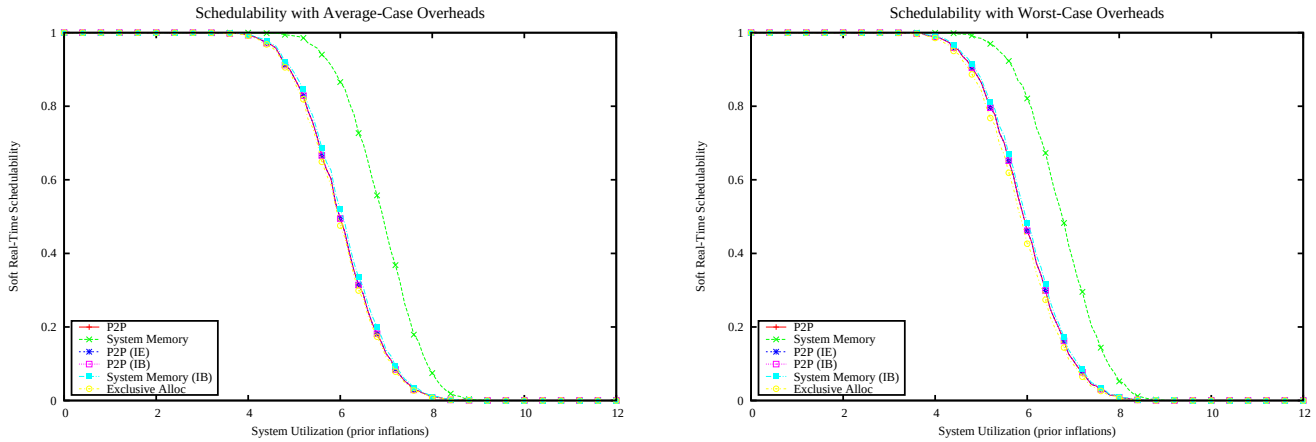

Figure 6809: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

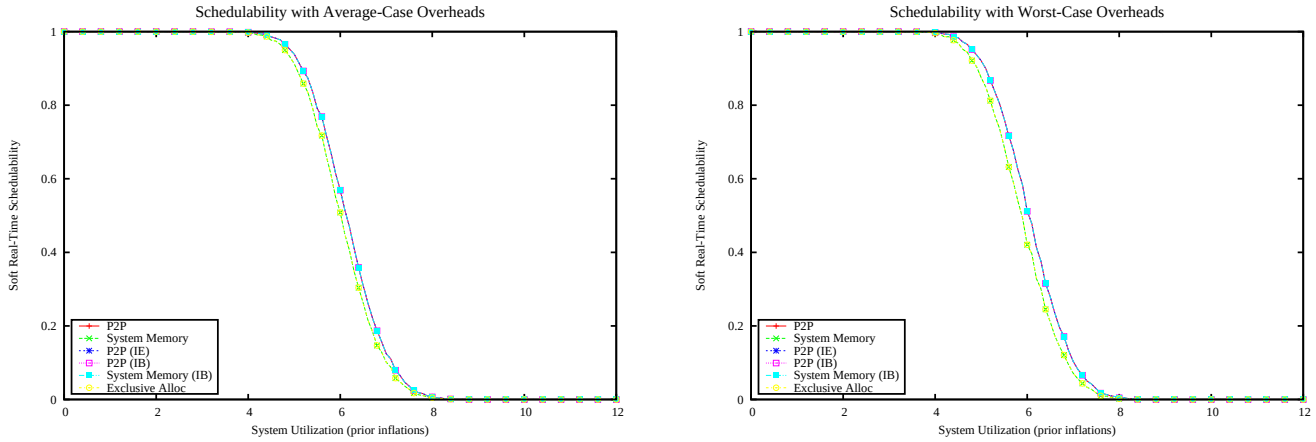

Figure 6810: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

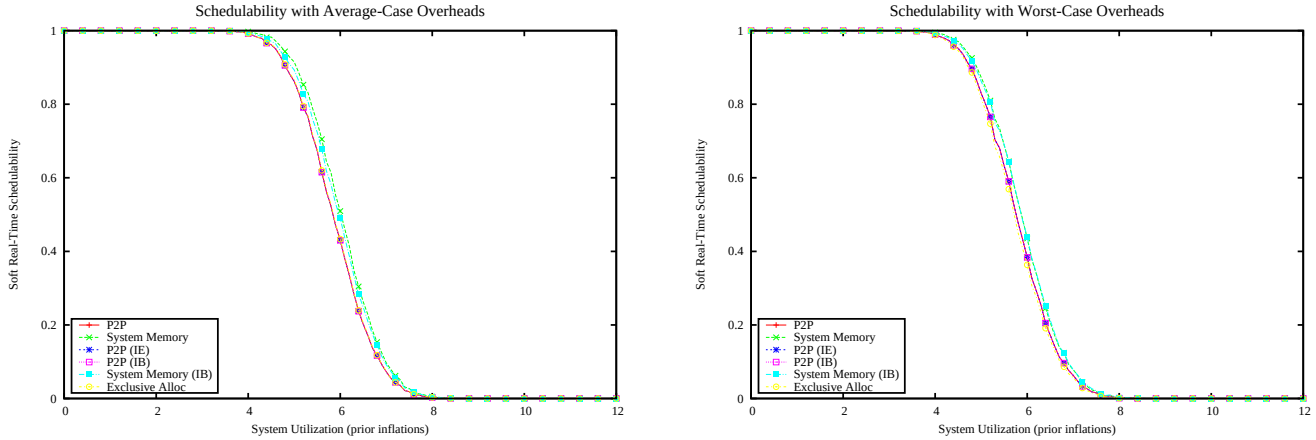

Figure 6811: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

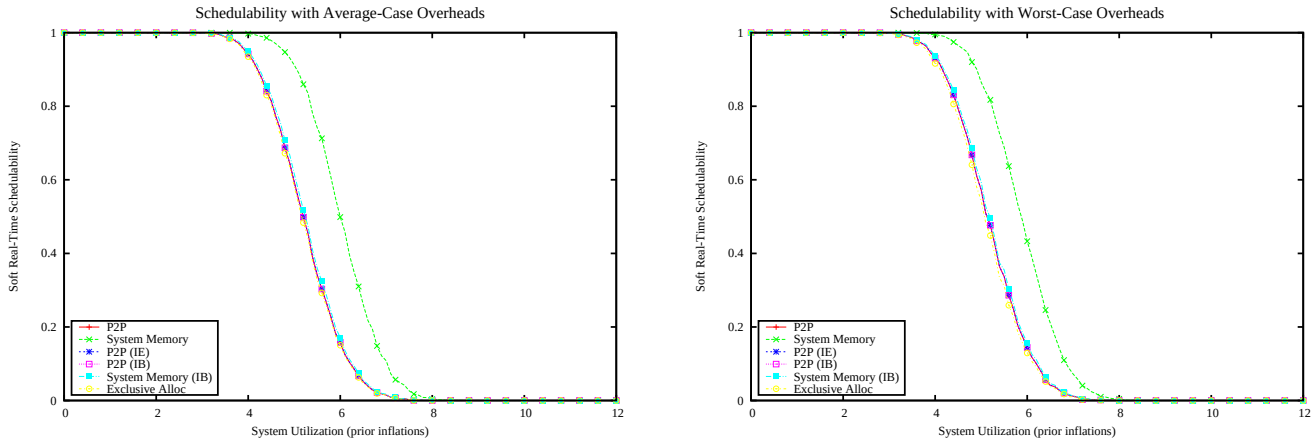

Figure 6812: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

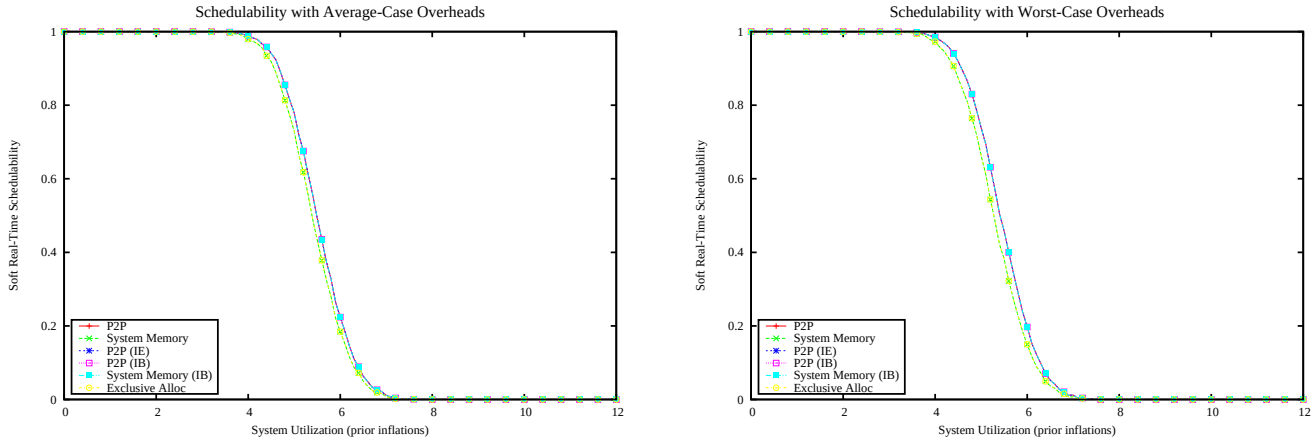

Figure 6813: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

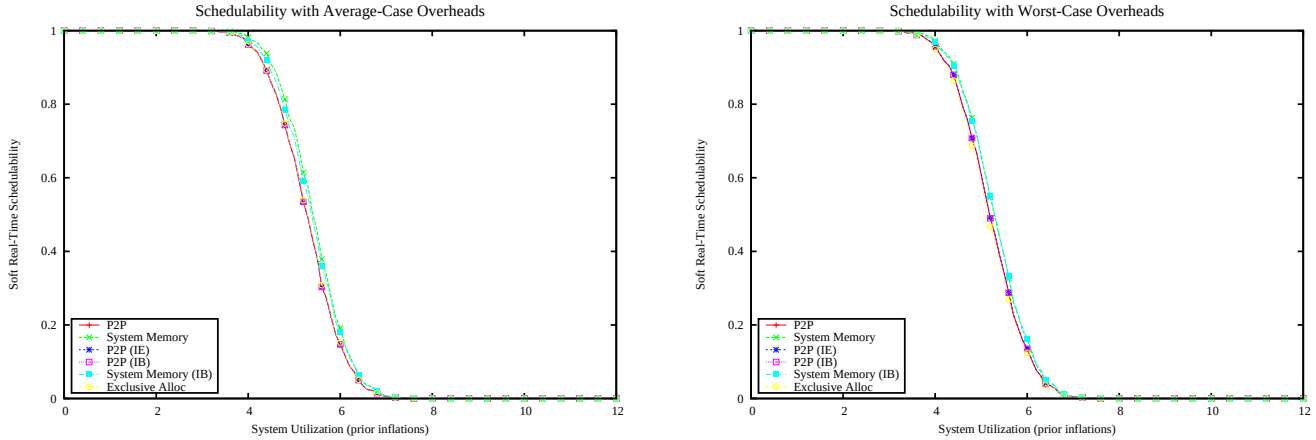

Figure 6814: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

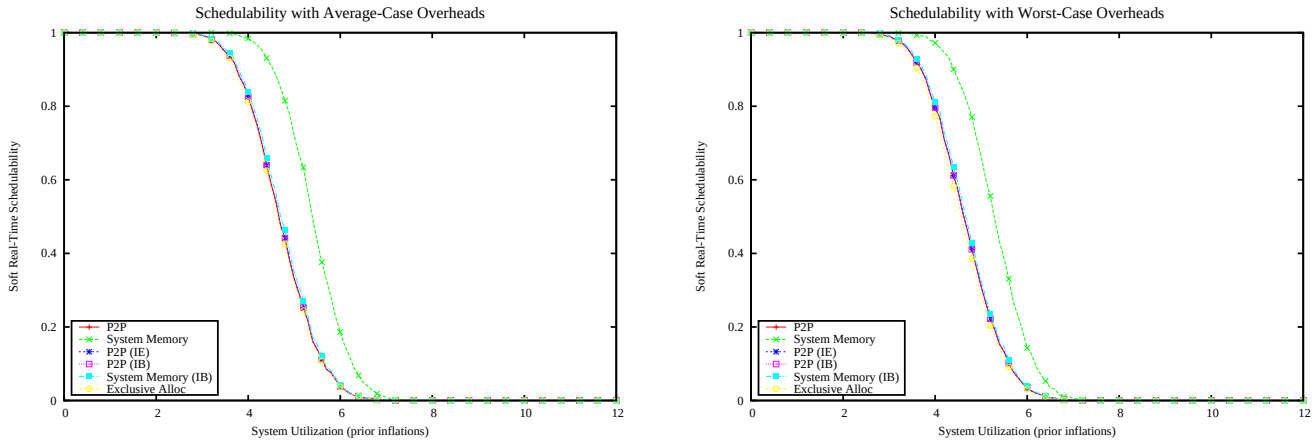

Figure 6815: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

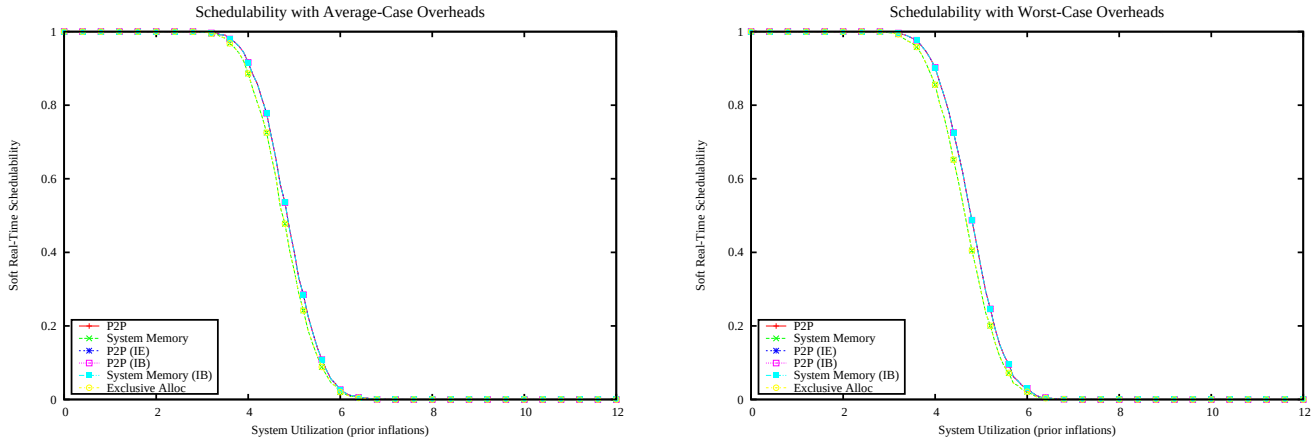

Figure 6816: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

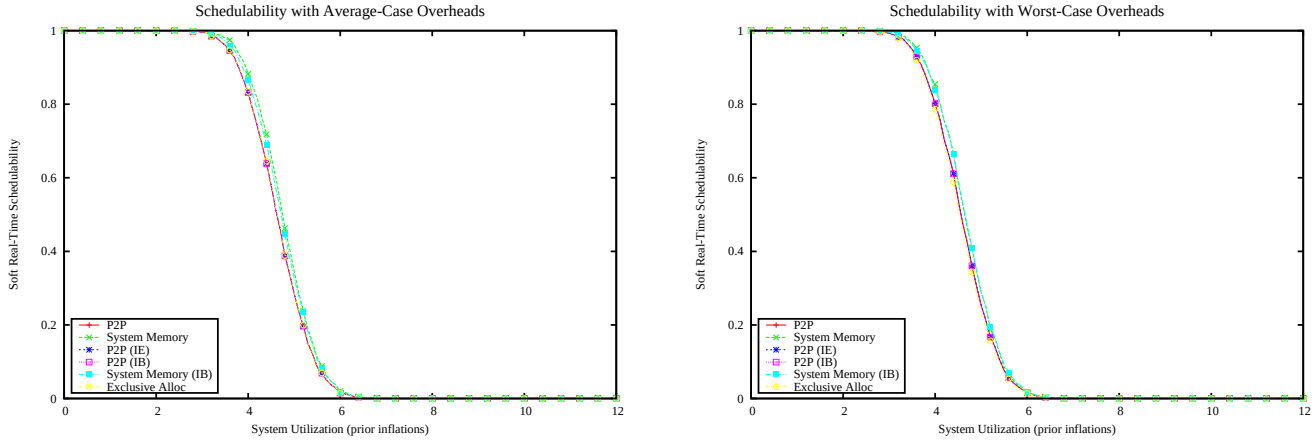

Figure 6817: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

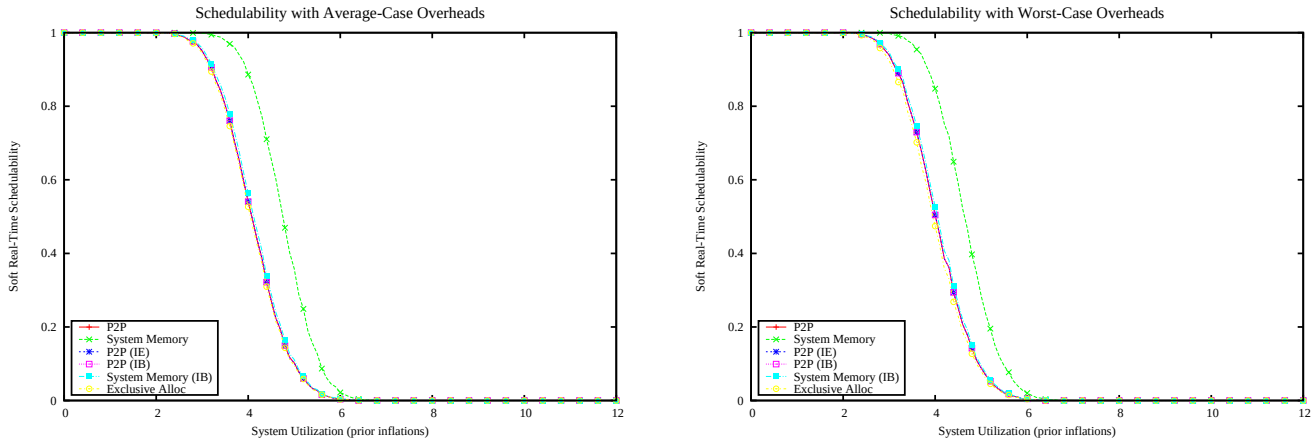

Figure 6818: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

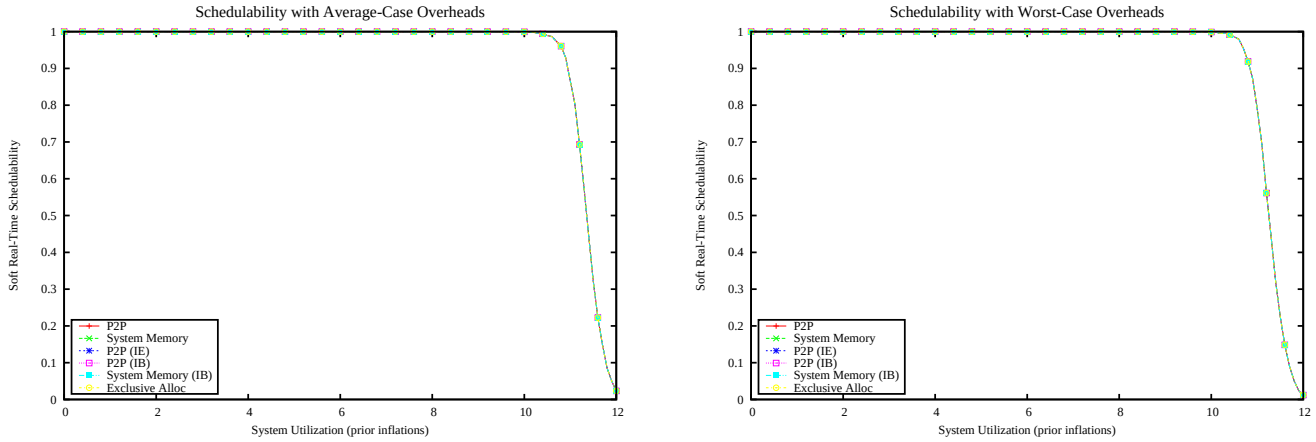

Figure 6819: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

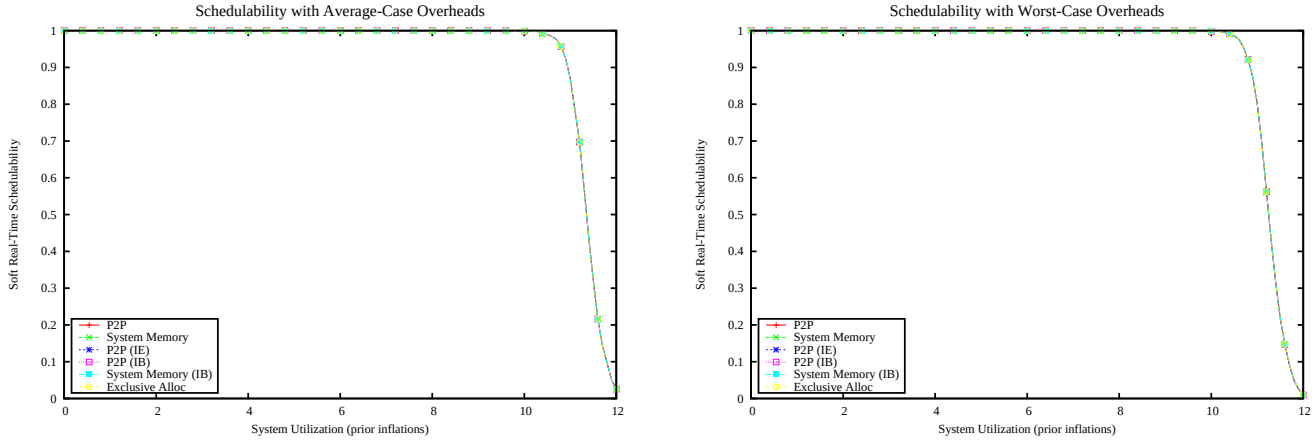

Figure 6820: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

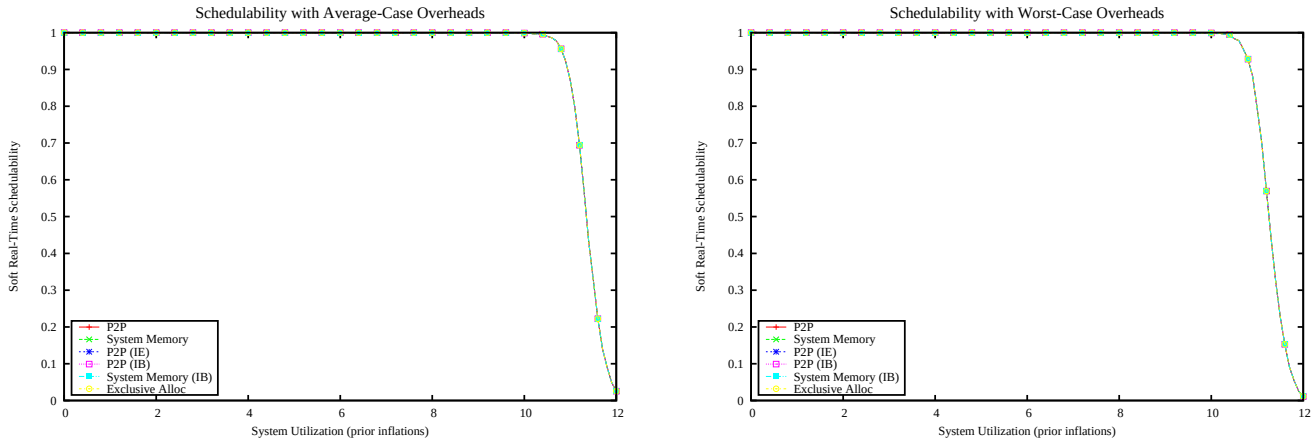

Figure 6821: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

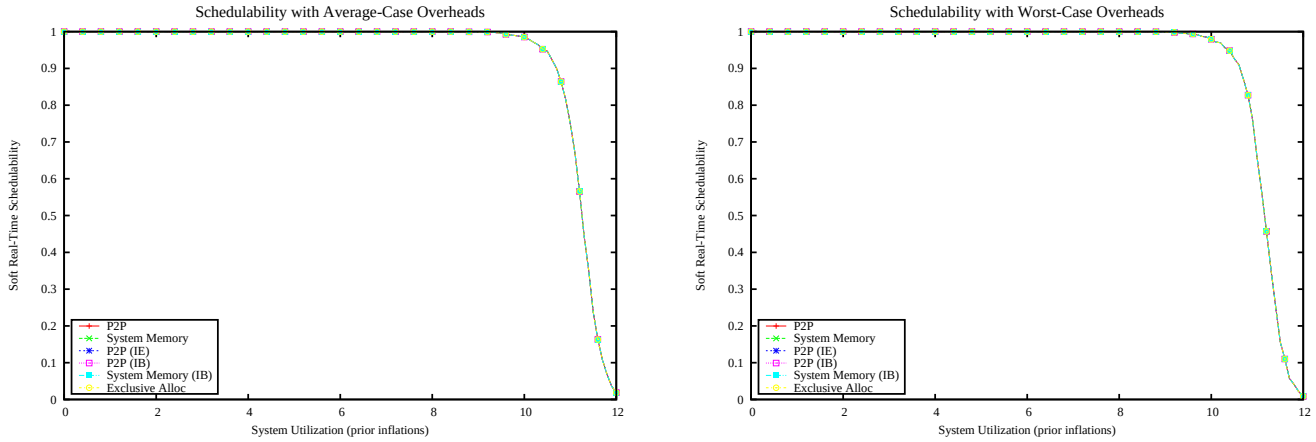

Figure 6822: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

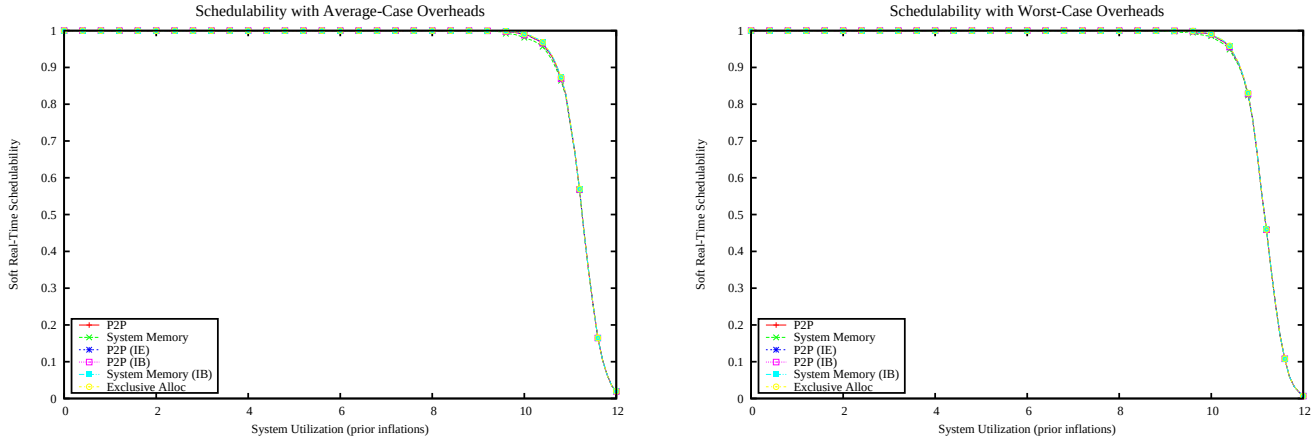

Figure 6823: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

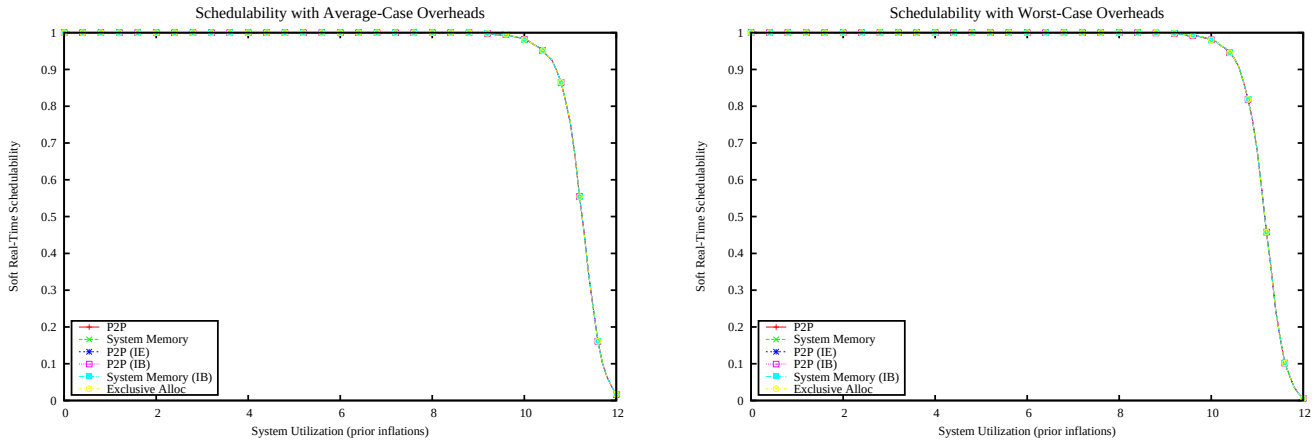

Figure 6824: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

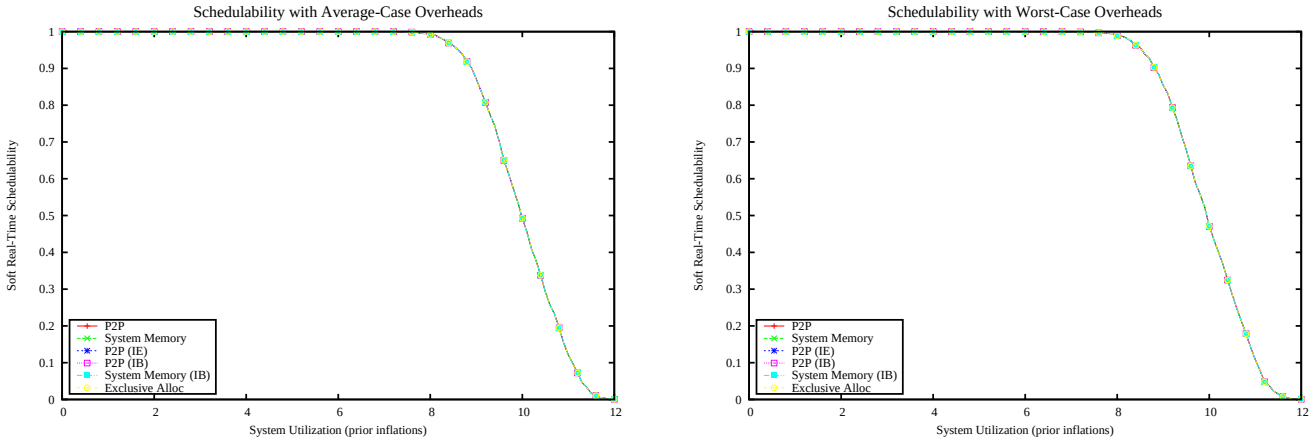

Figure 6825: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

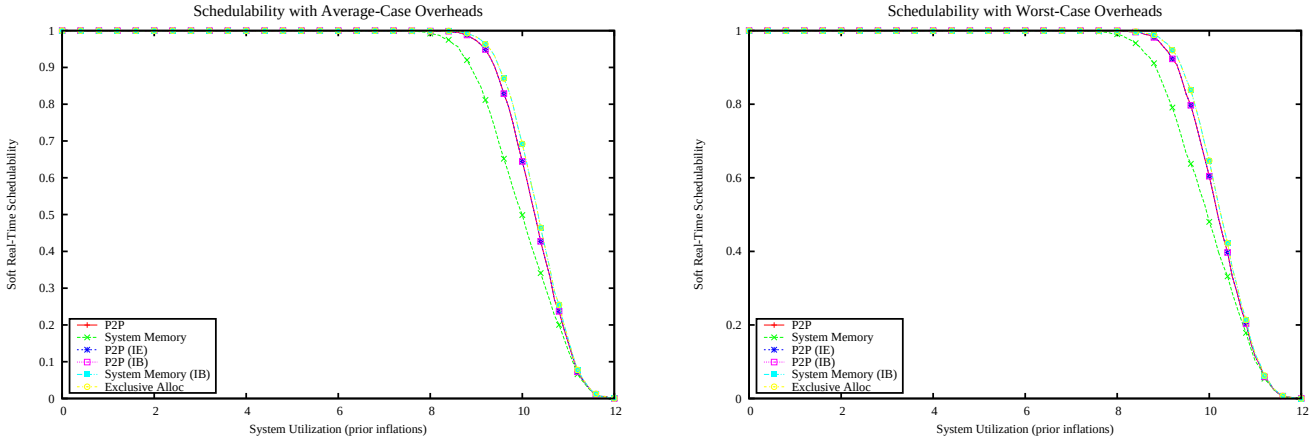

Figure 6826: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

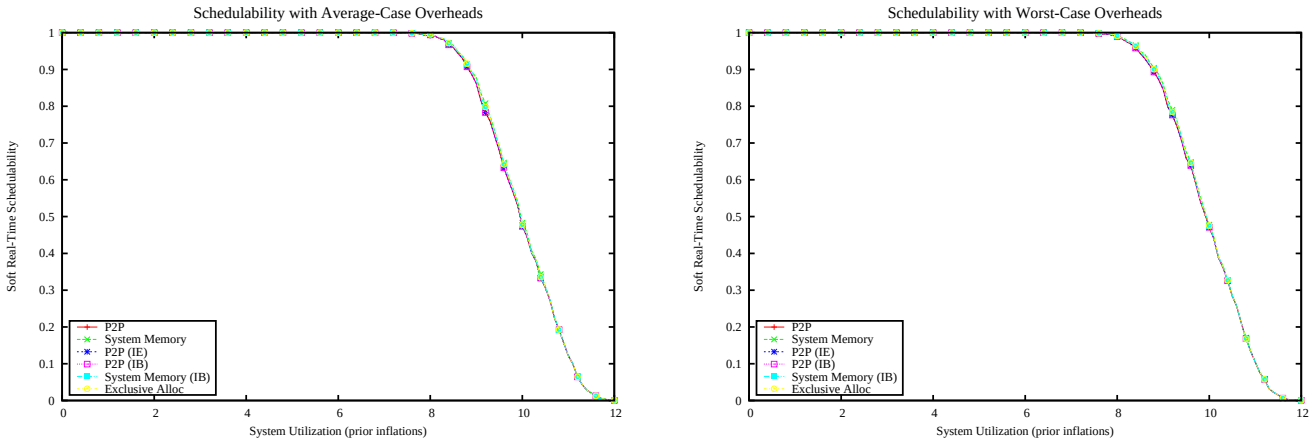

Figure 6827: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

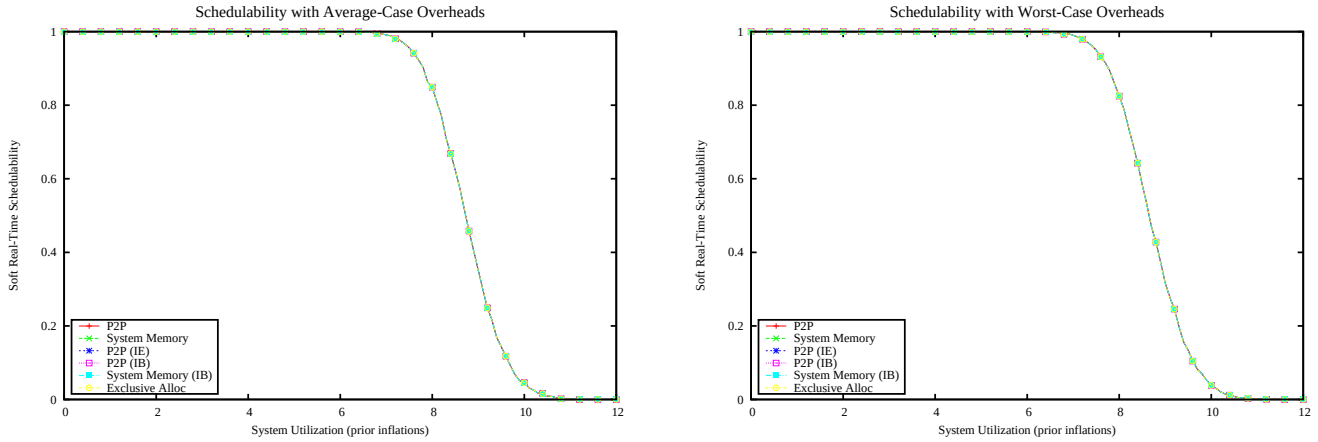

Figure 6828: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

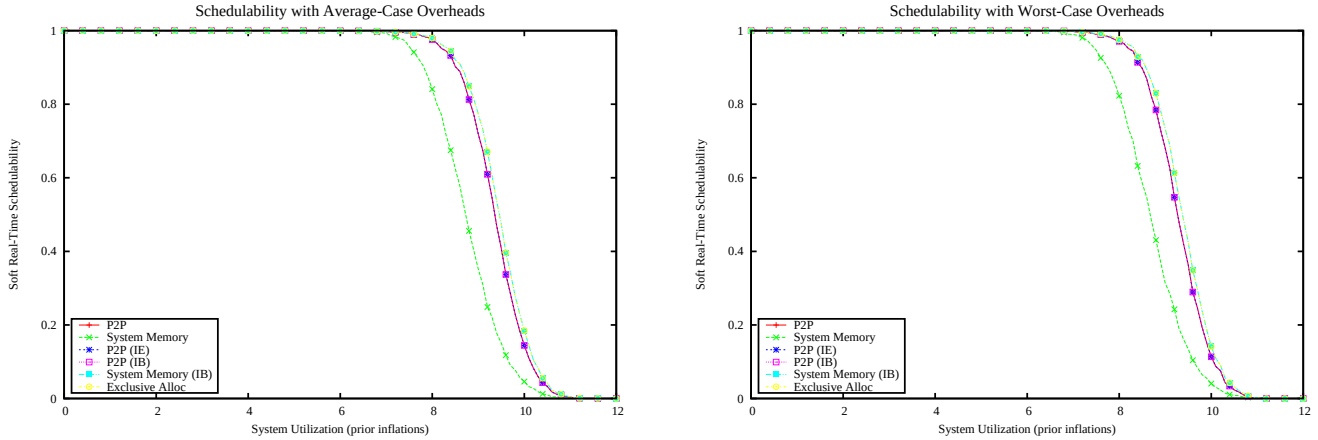

Figure 6829: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

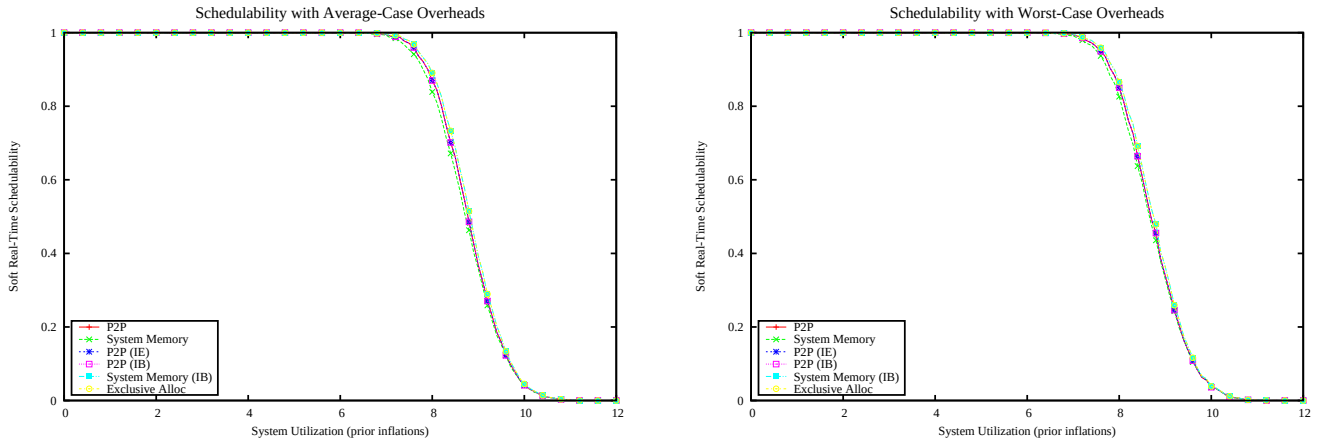

Figure 6830: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

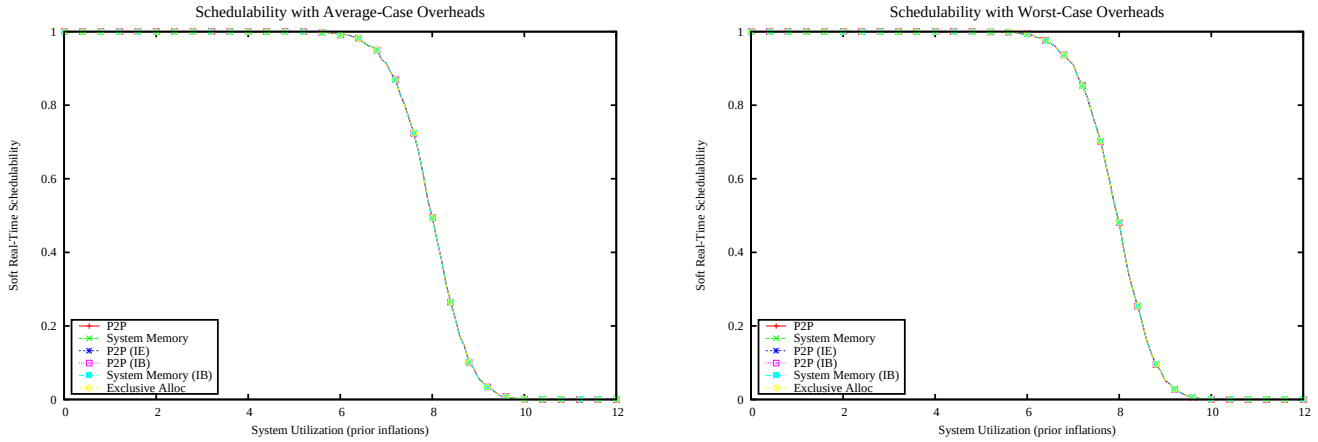

Figure 6831: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

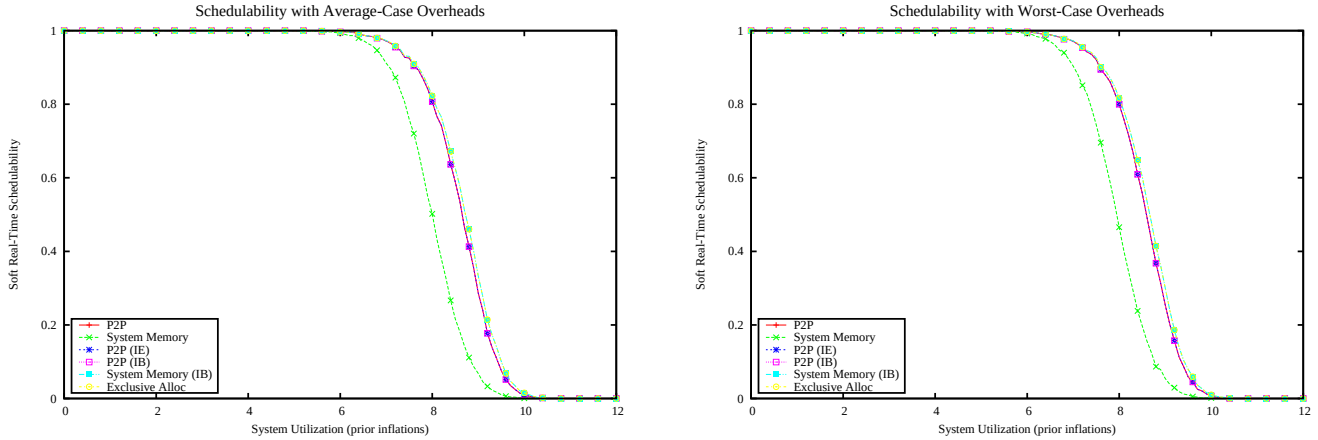

Figure 6832: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

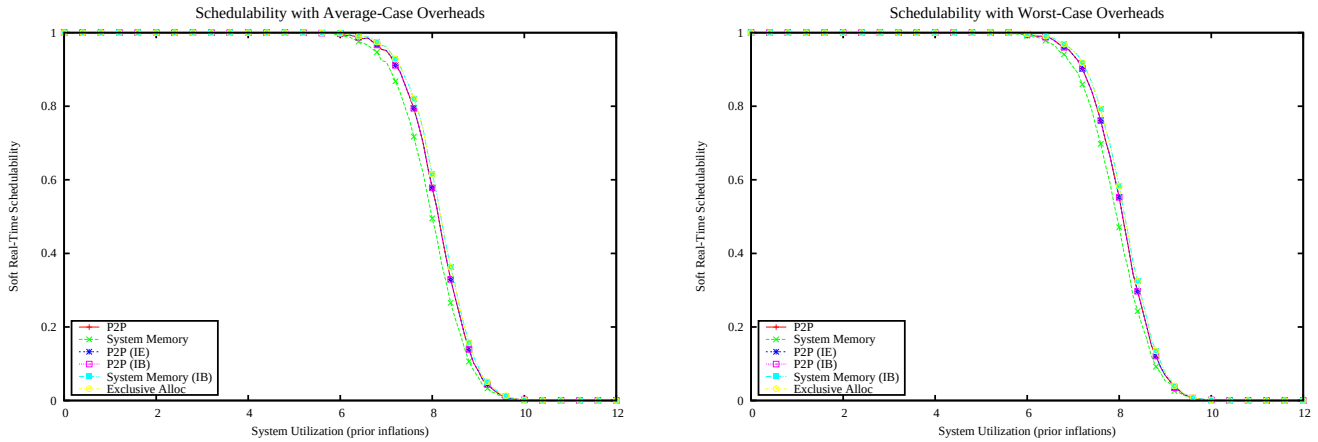

Figure 6833: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

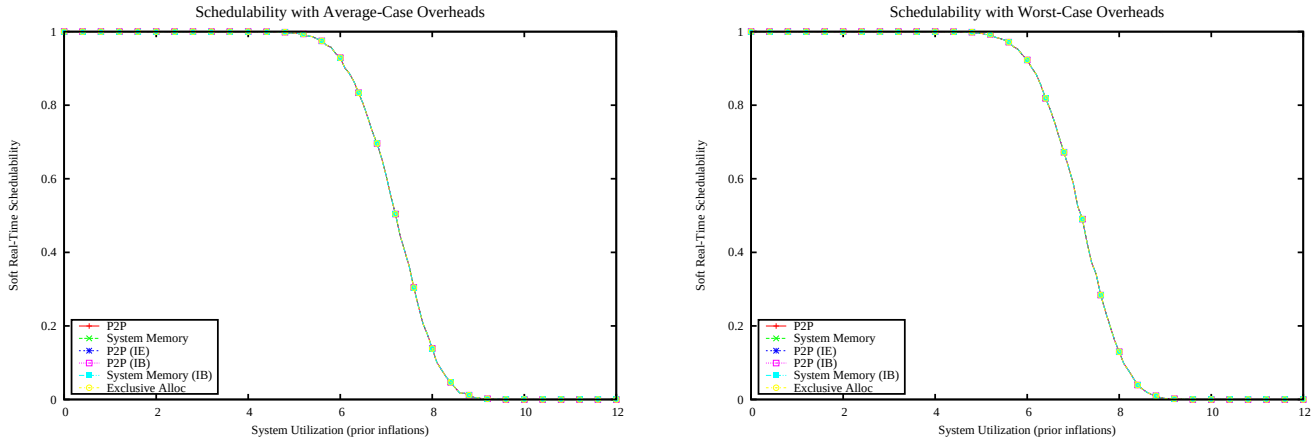

Figure 6834: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

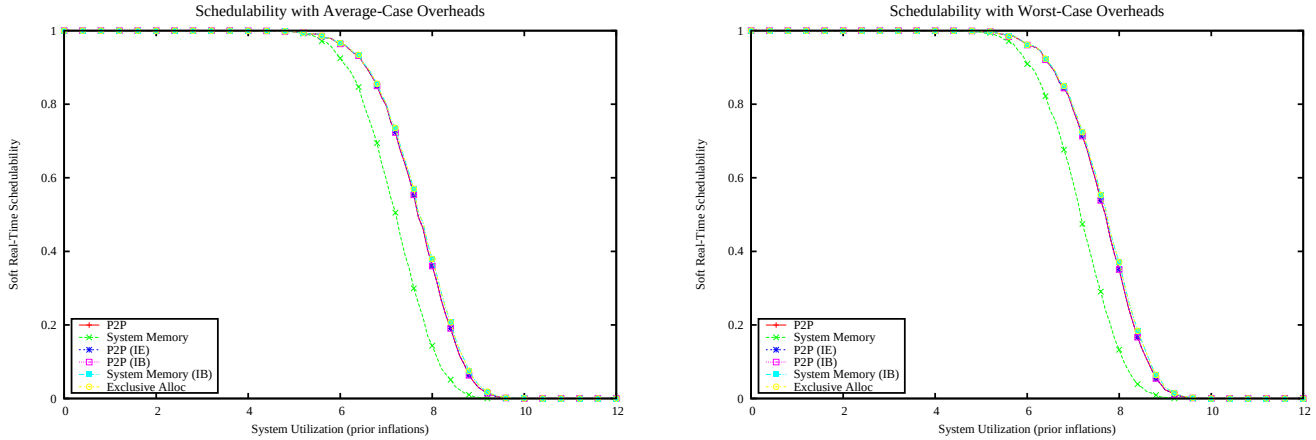

Figure 6835: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

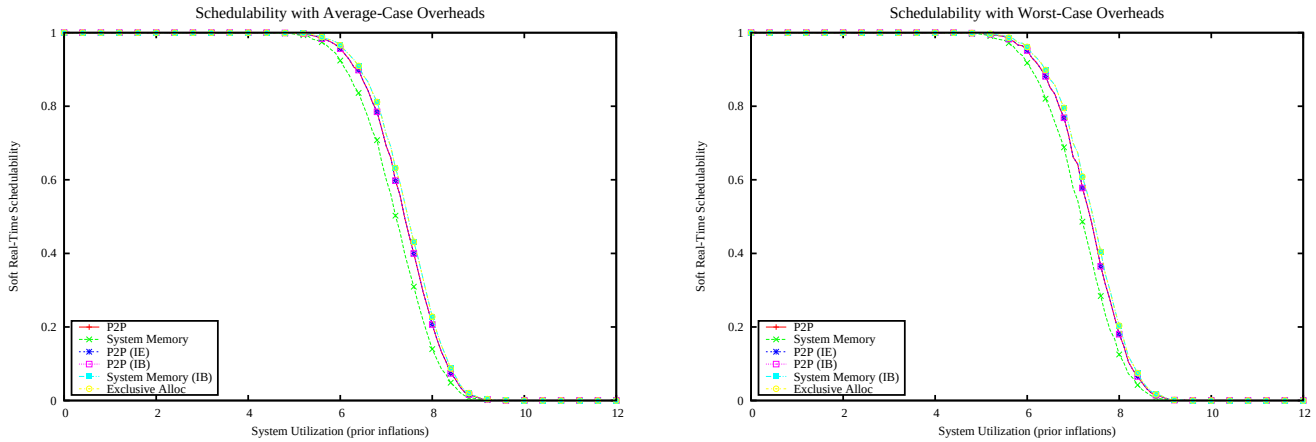

Figure 6836: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

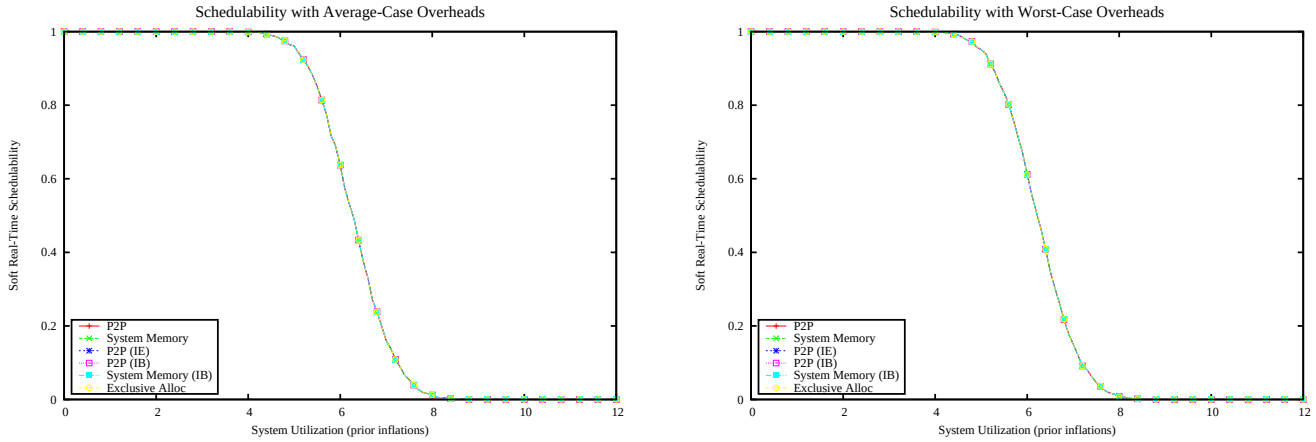

Figure 6837: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

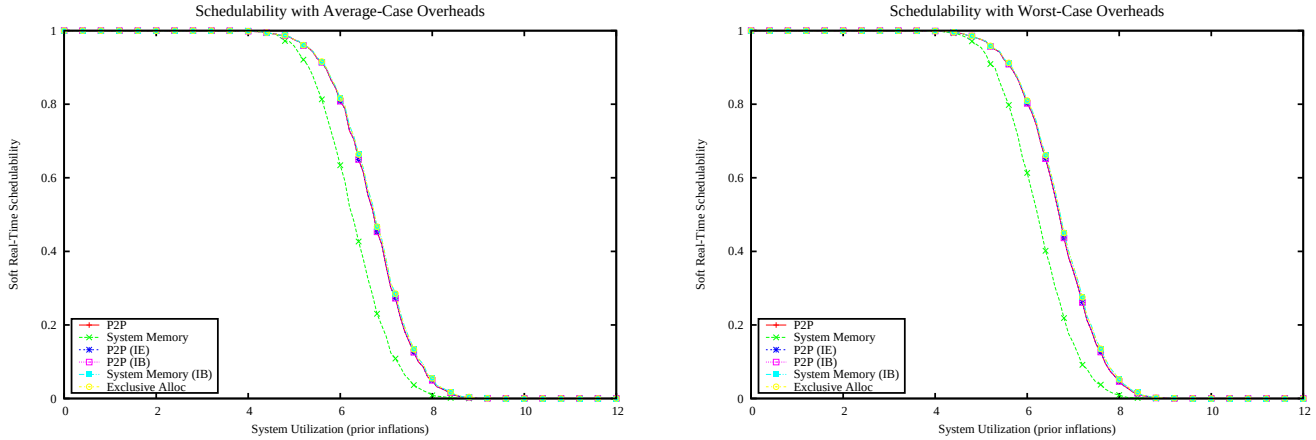

Figure 6838: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

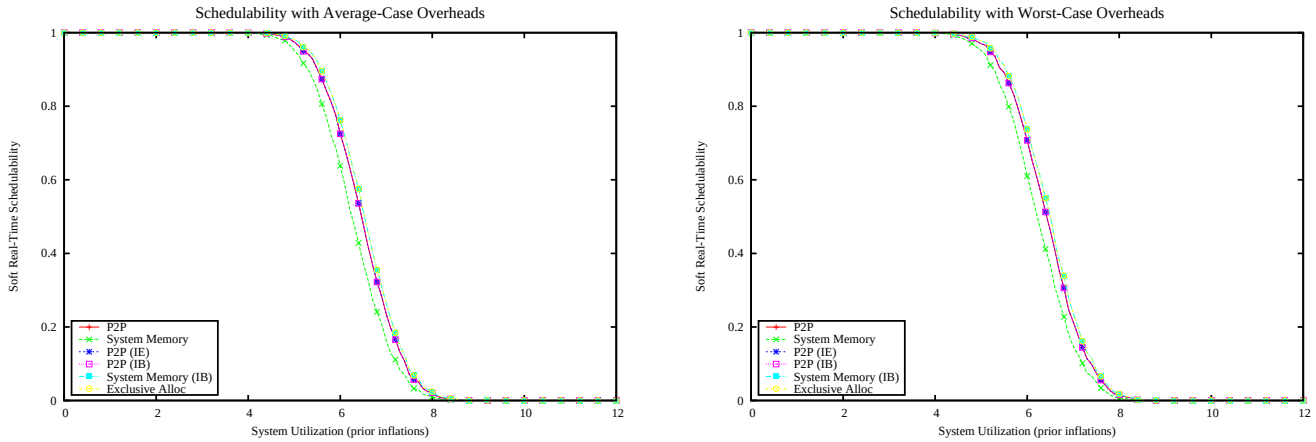

Figure 6839: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

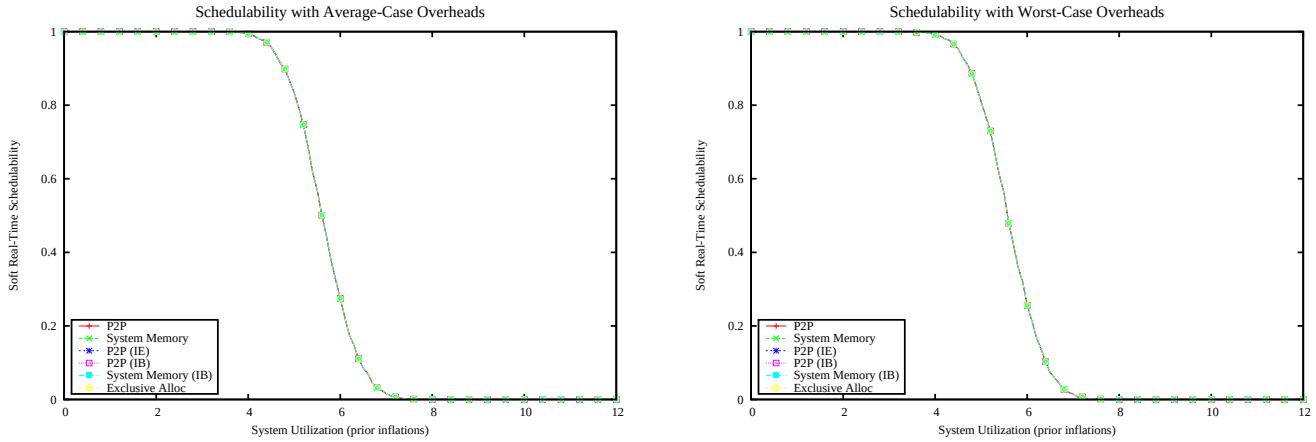

Figure 6840: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

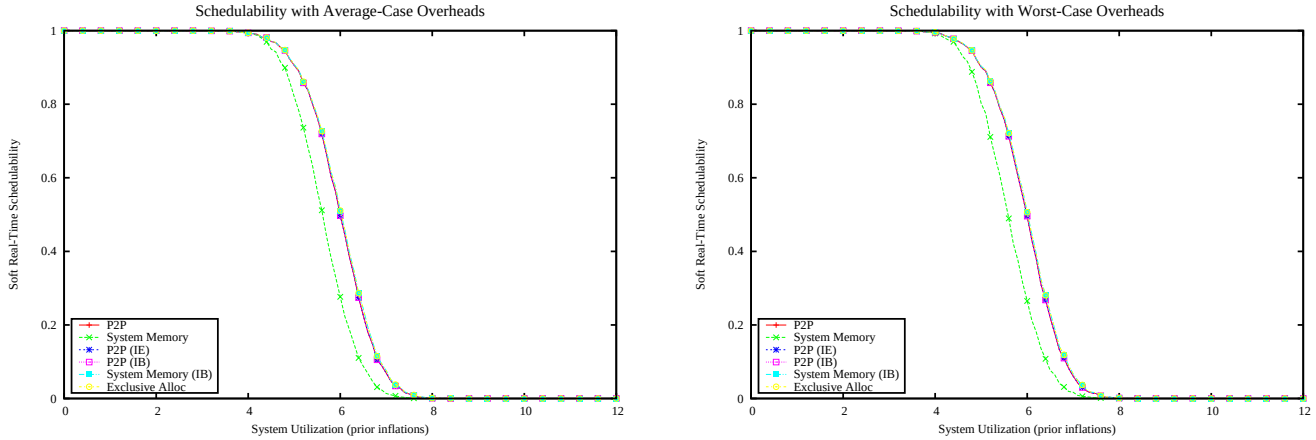

Figure 6841: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

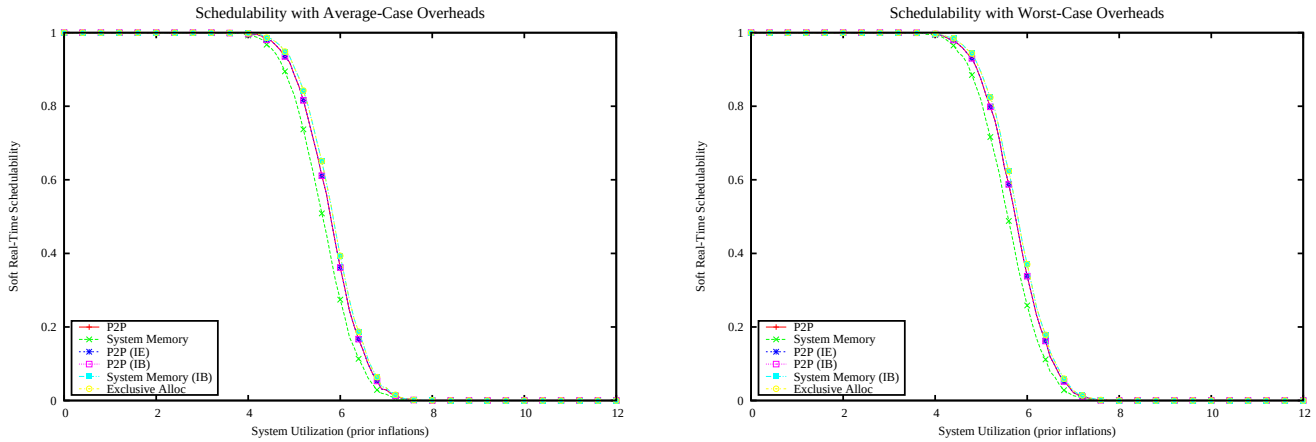

Figure 6842: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

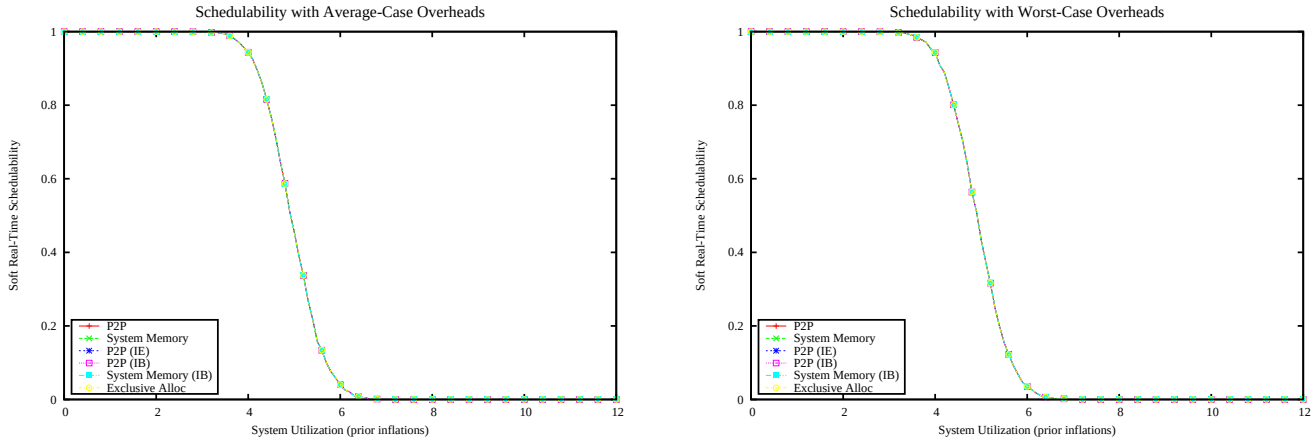

Figure 6843: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

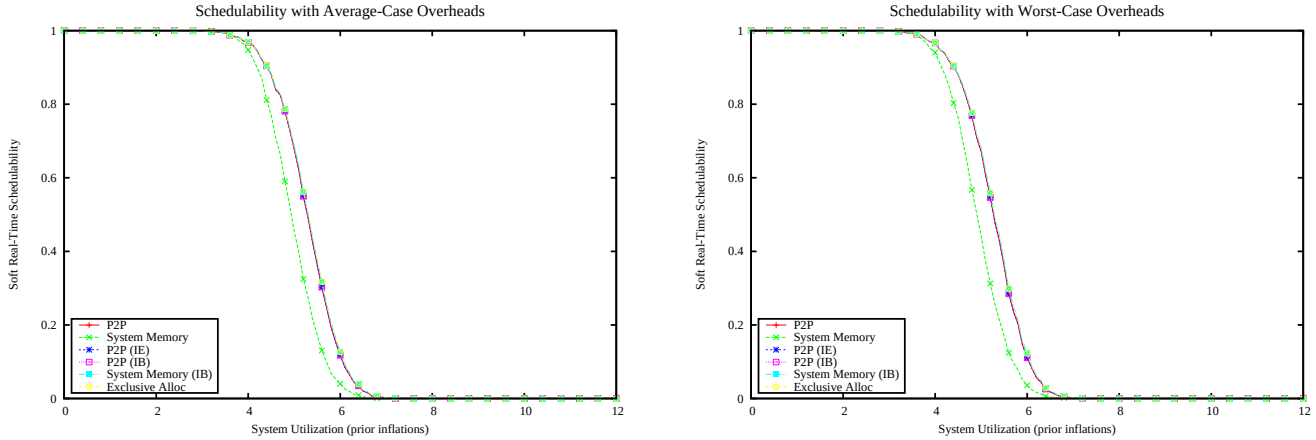

Figure 6844: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

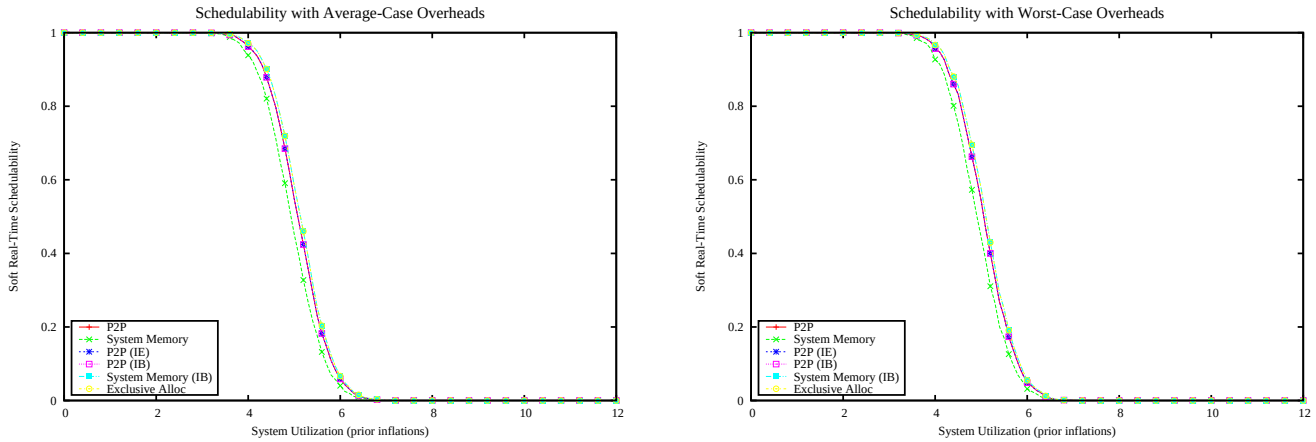

Figure 6845: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

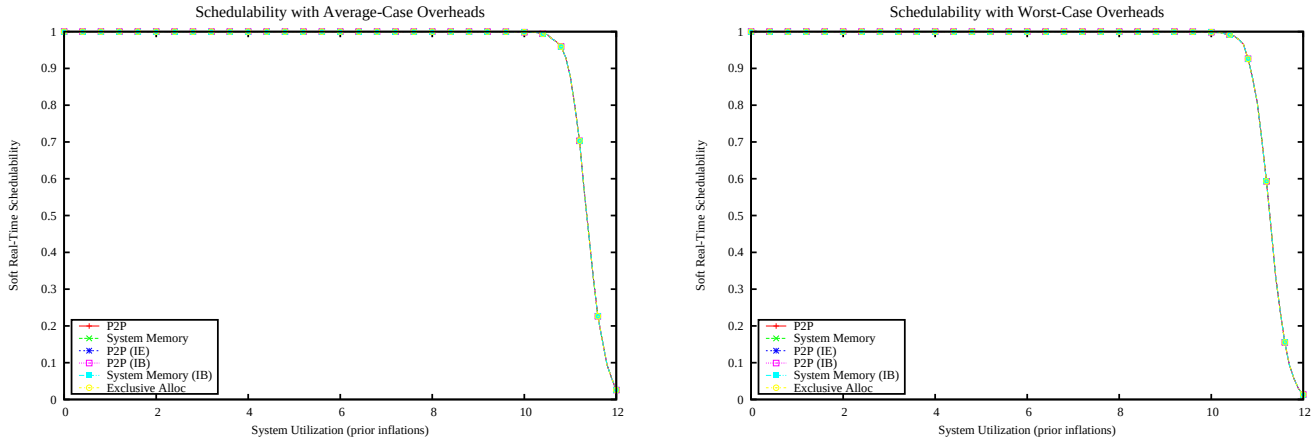

Figure 6846: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

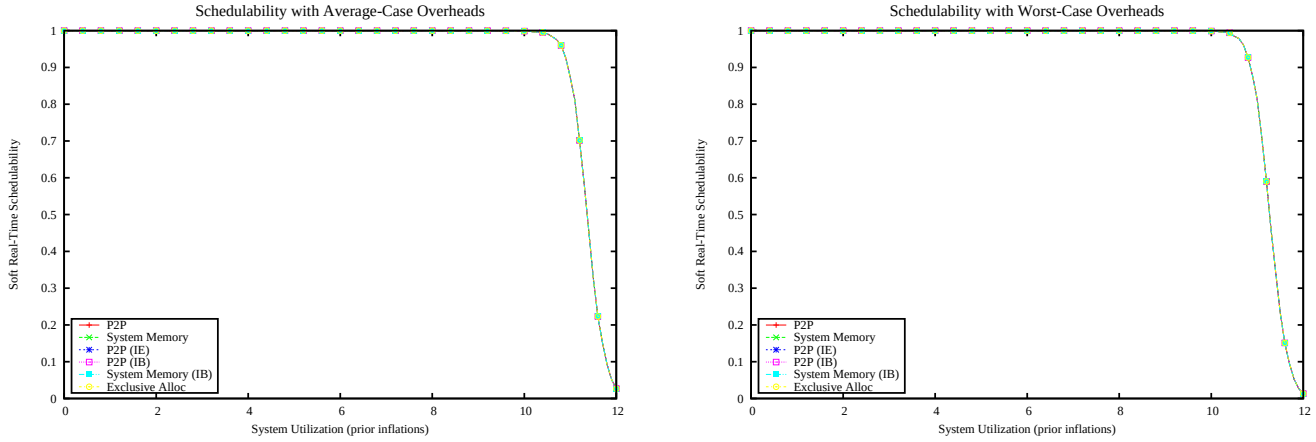

Figure 6847: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

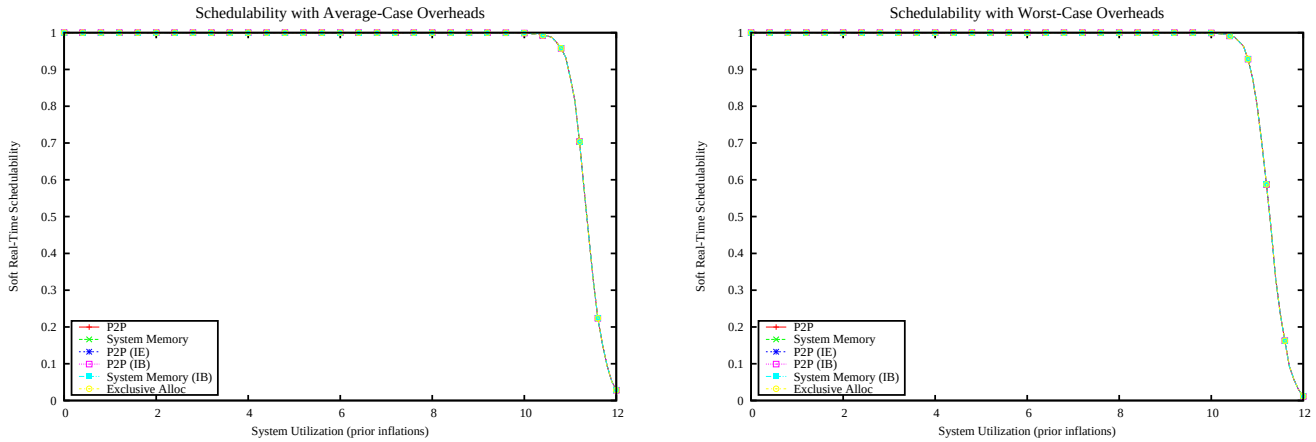

Figure 6848: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

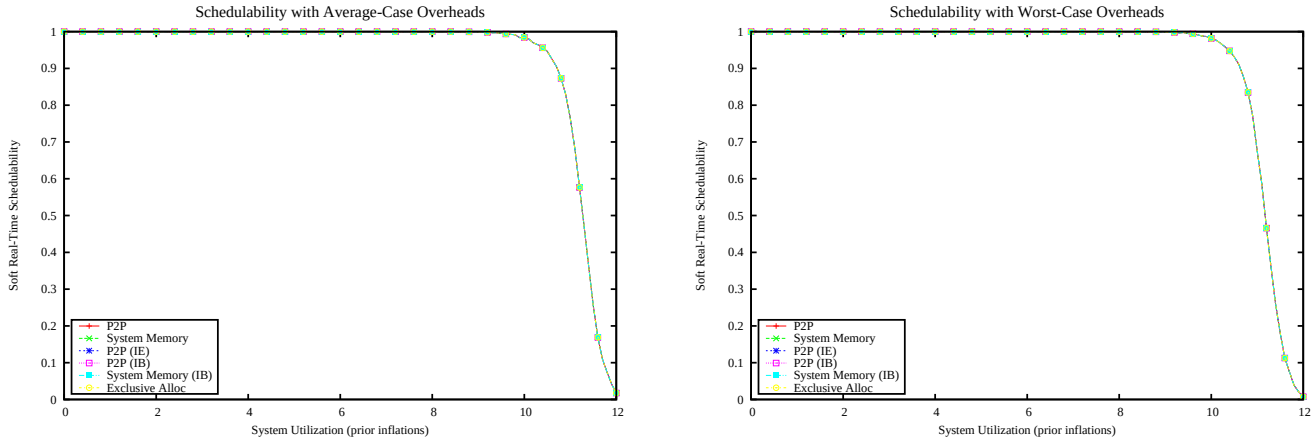

Figure 6849: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

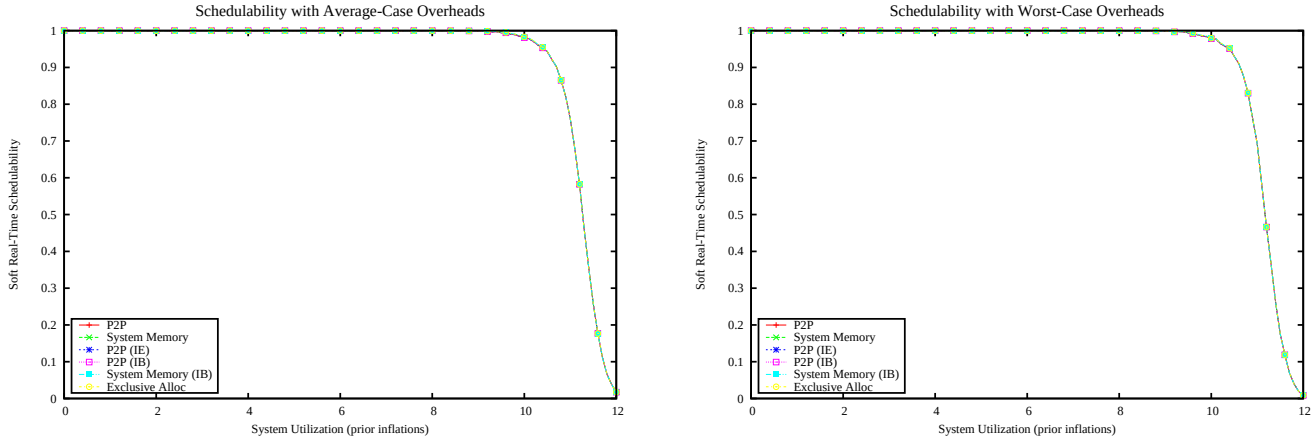

Figure 6850: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

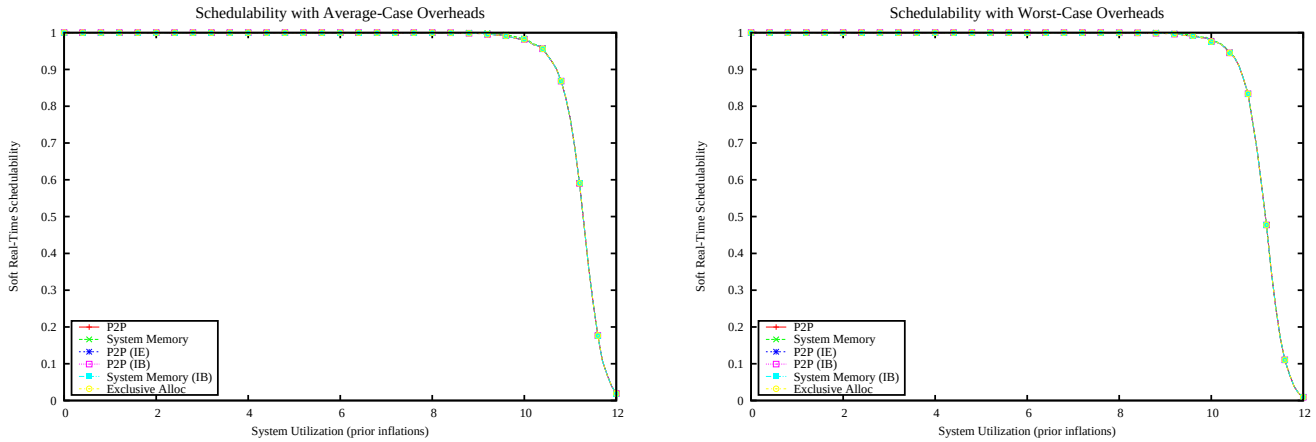

Figure 6851: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

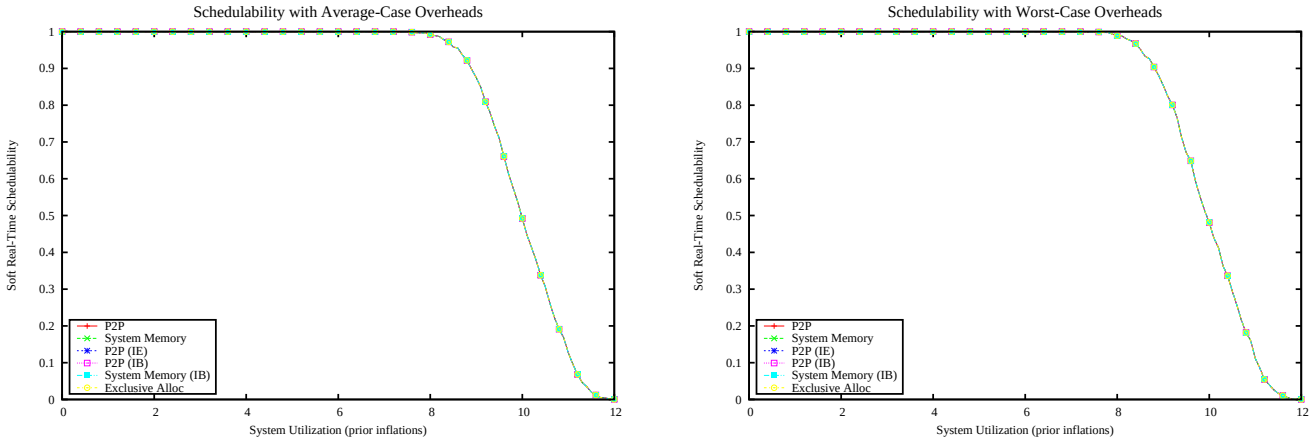

Figure 6852: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

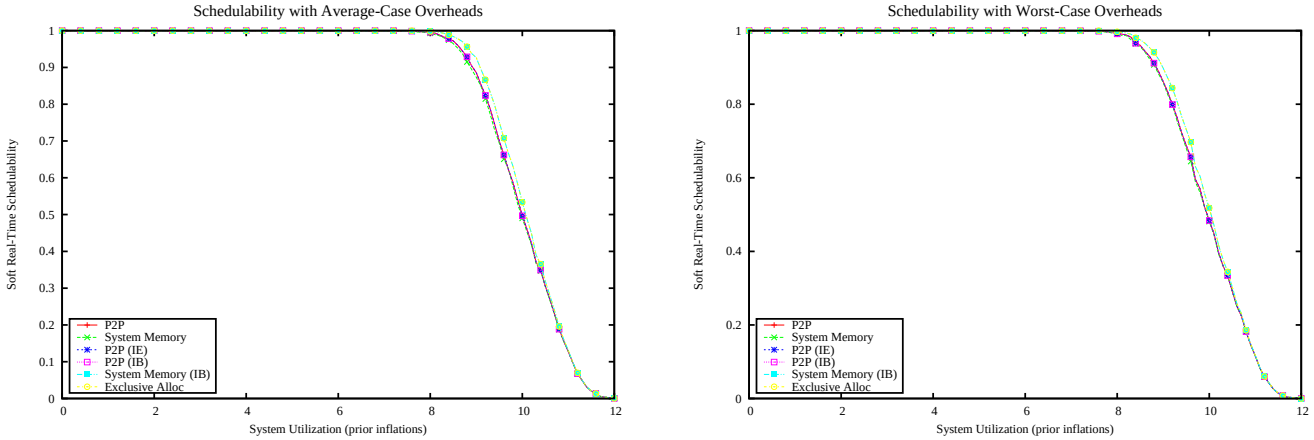

Figure 6853: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

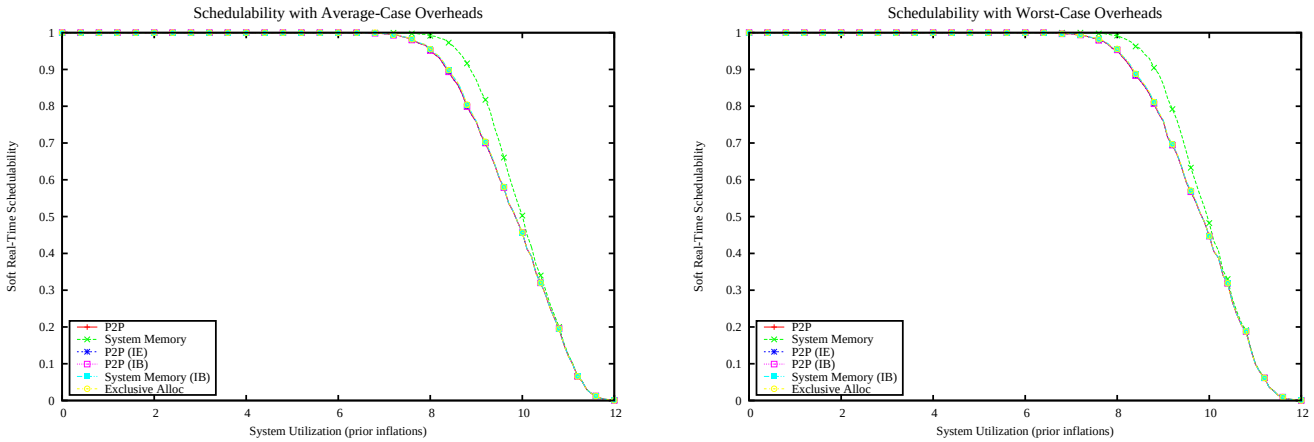

Figure 6854: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

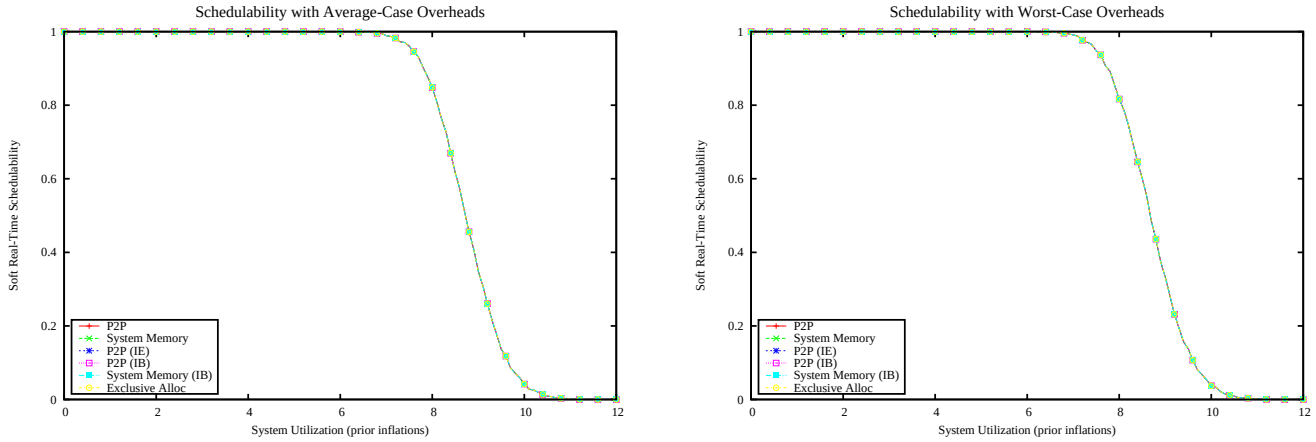

Figure 6855: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

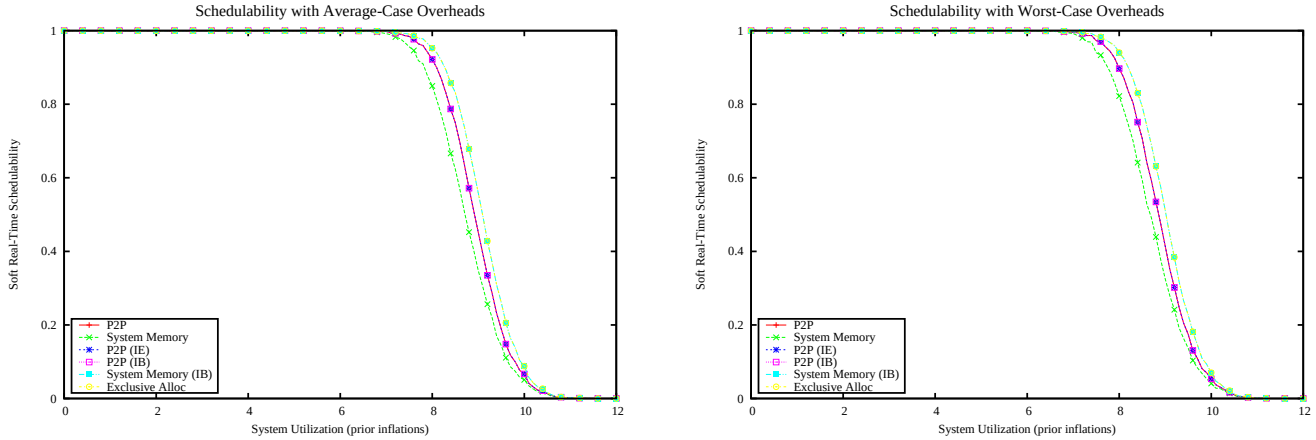

Figure 6856: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

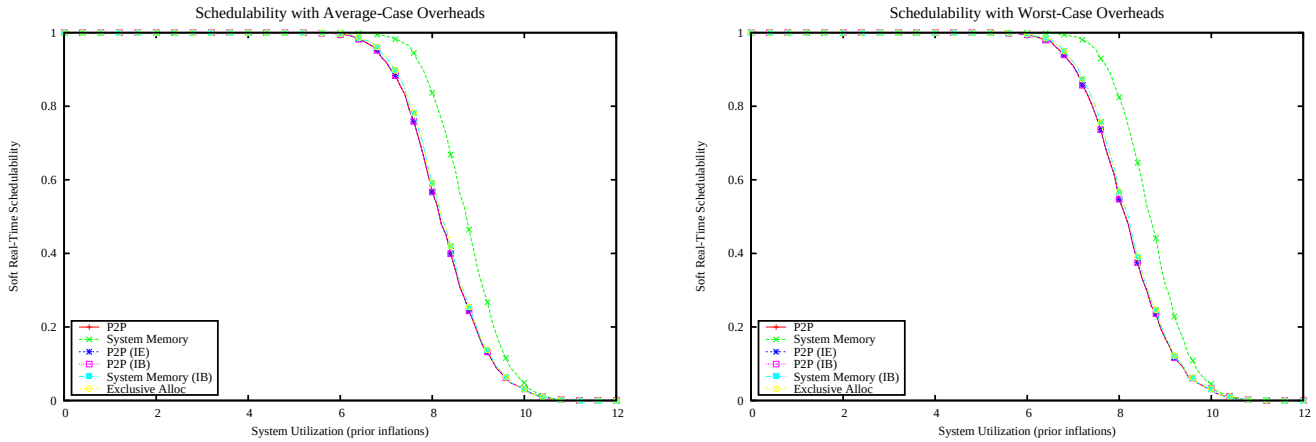

Figure 6857: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

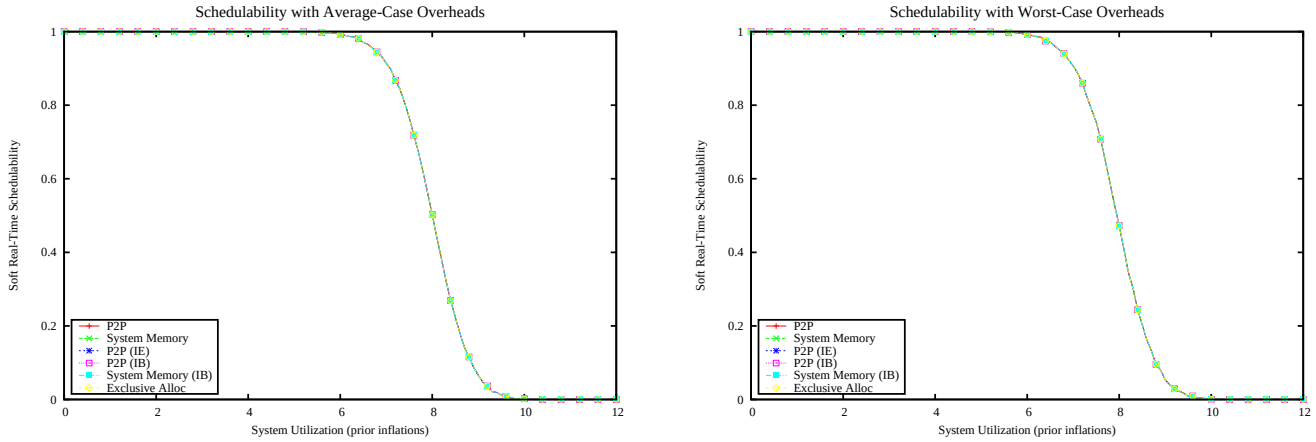

Figure 6858: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

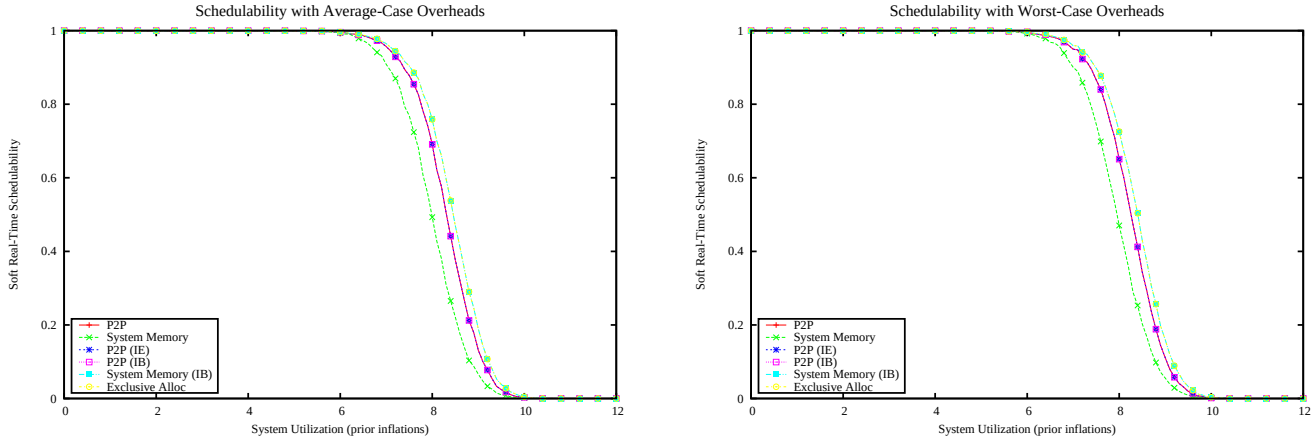

Figure 6859: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

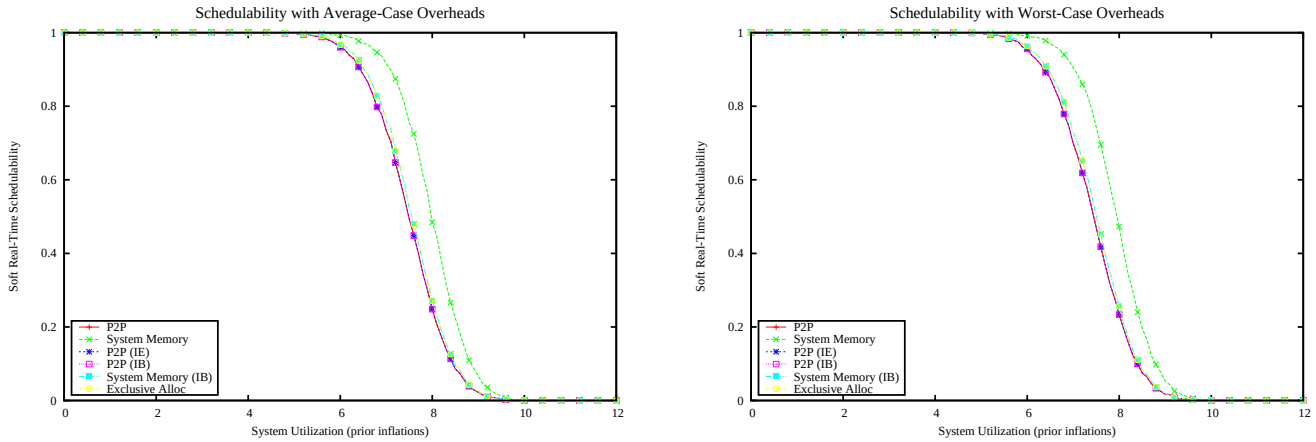

Figure 6860: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

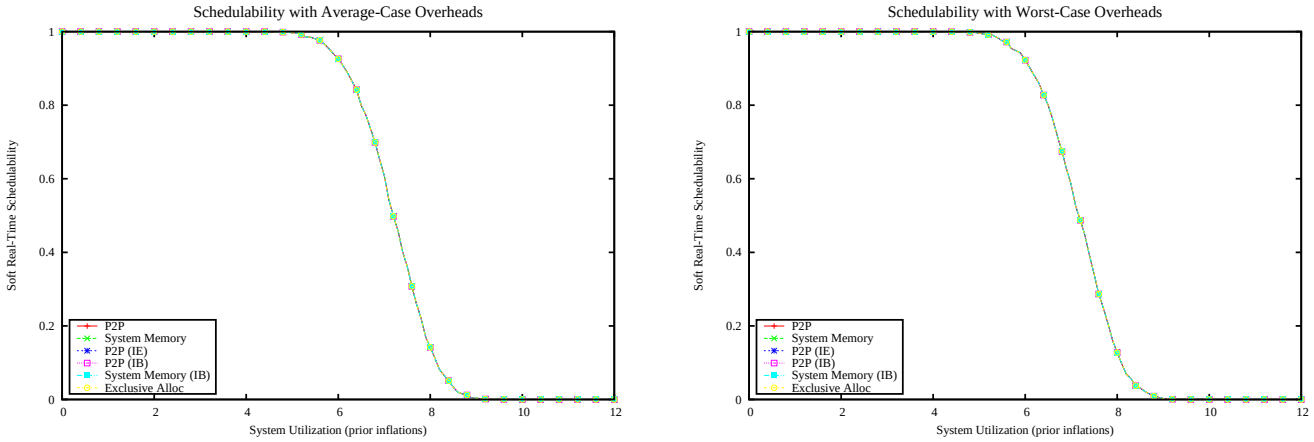

Figure 6861: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

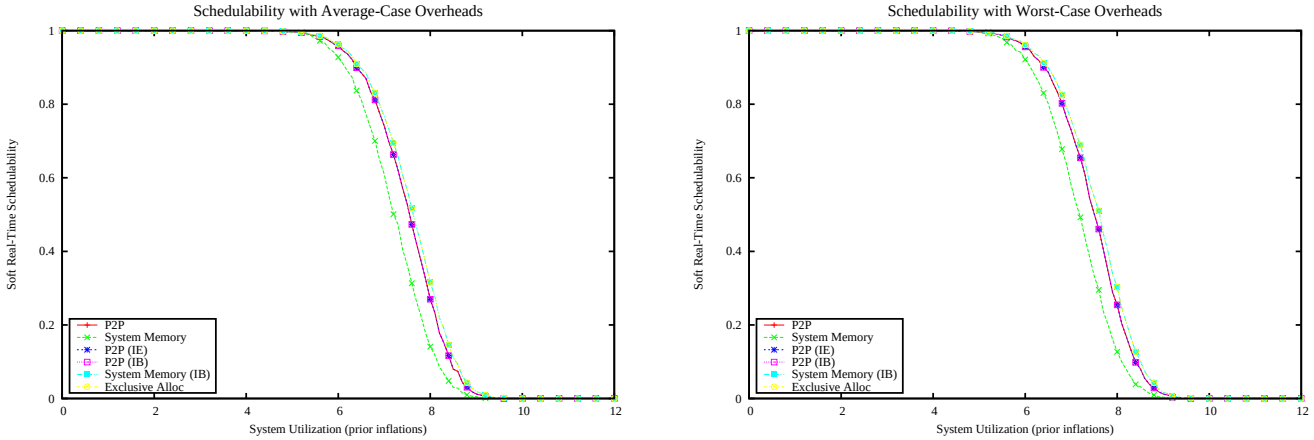

Figure 6862: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

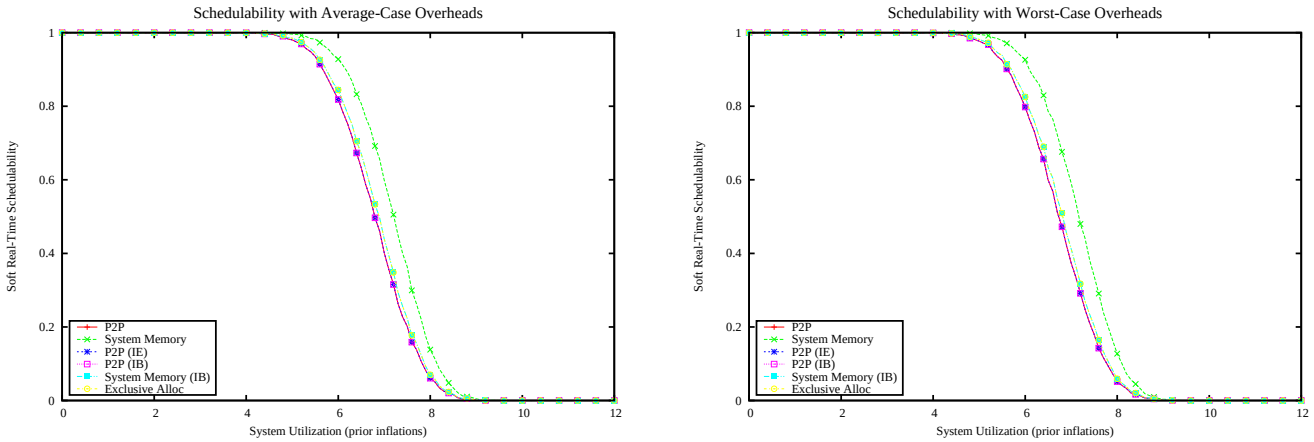

Figure 6863: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

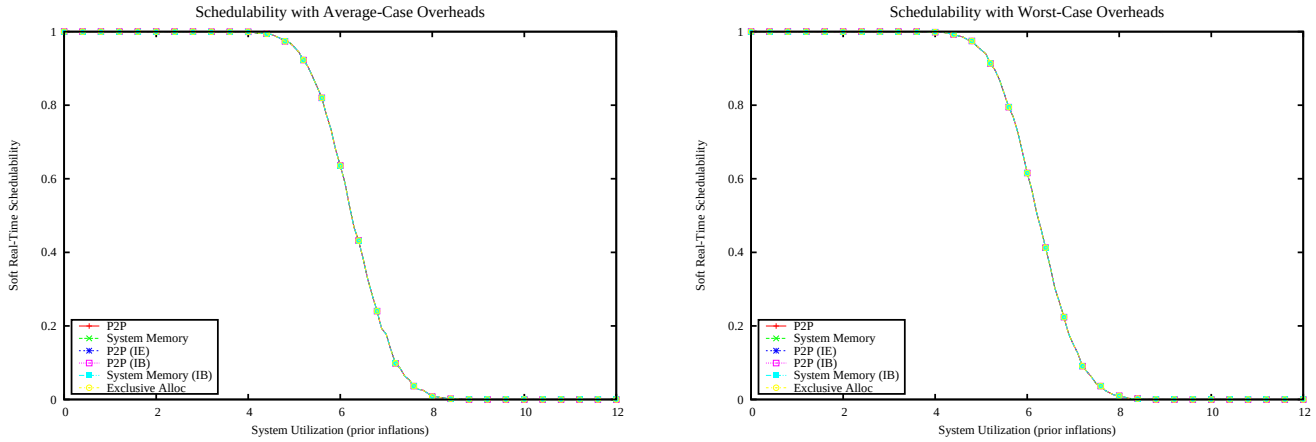

Figure 6864: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

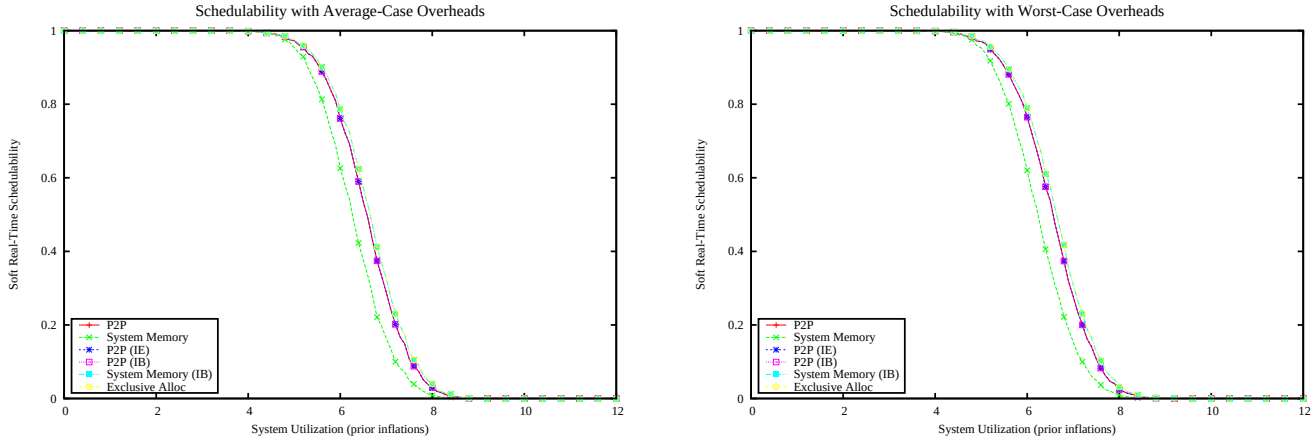

Figure 6865: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

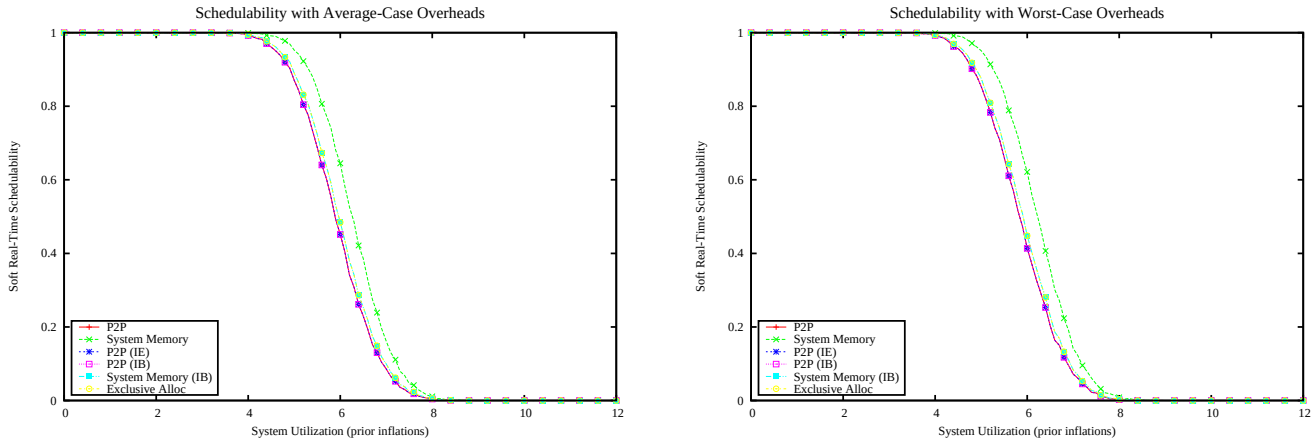

Figure 6866: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

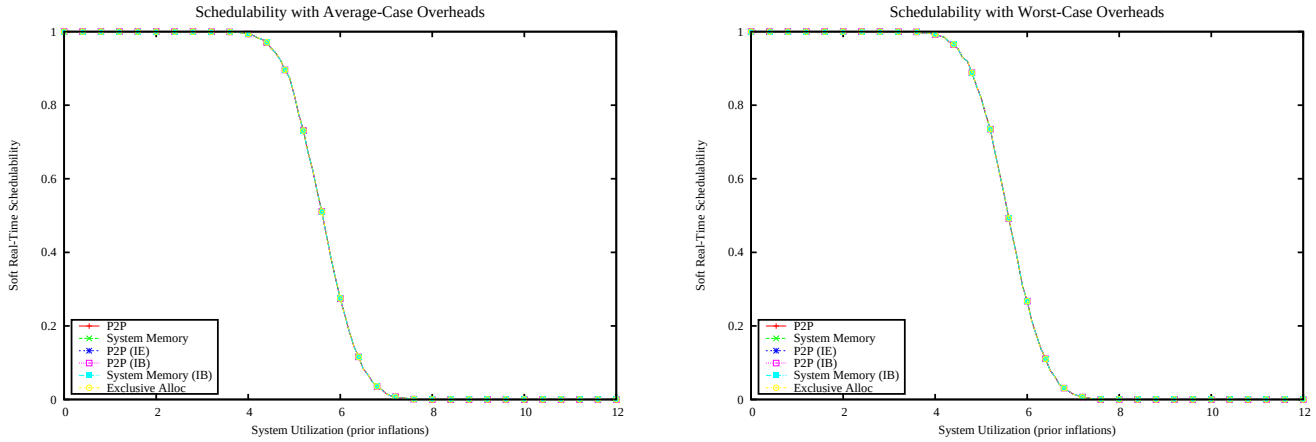

Figure 6867: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

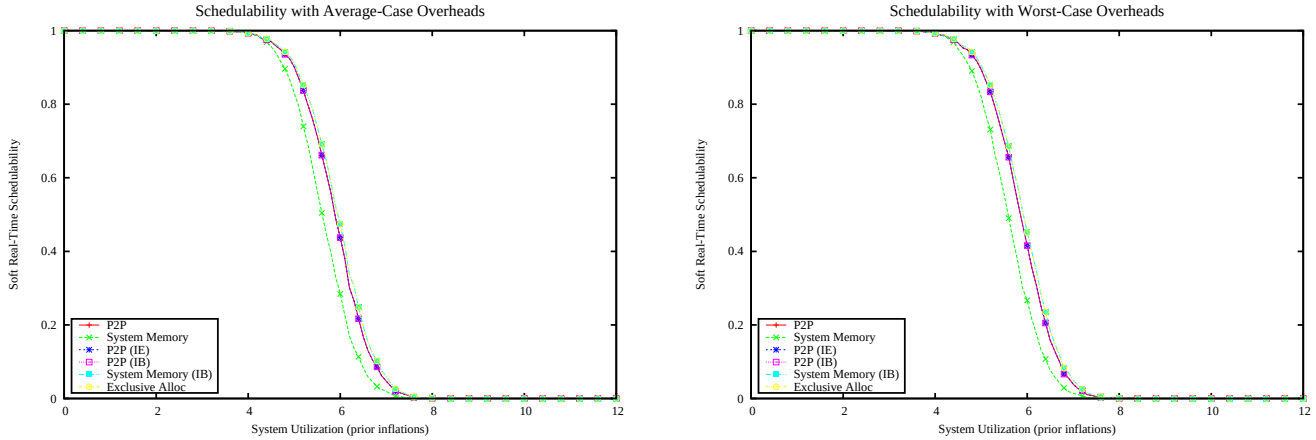

Figure 6868: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

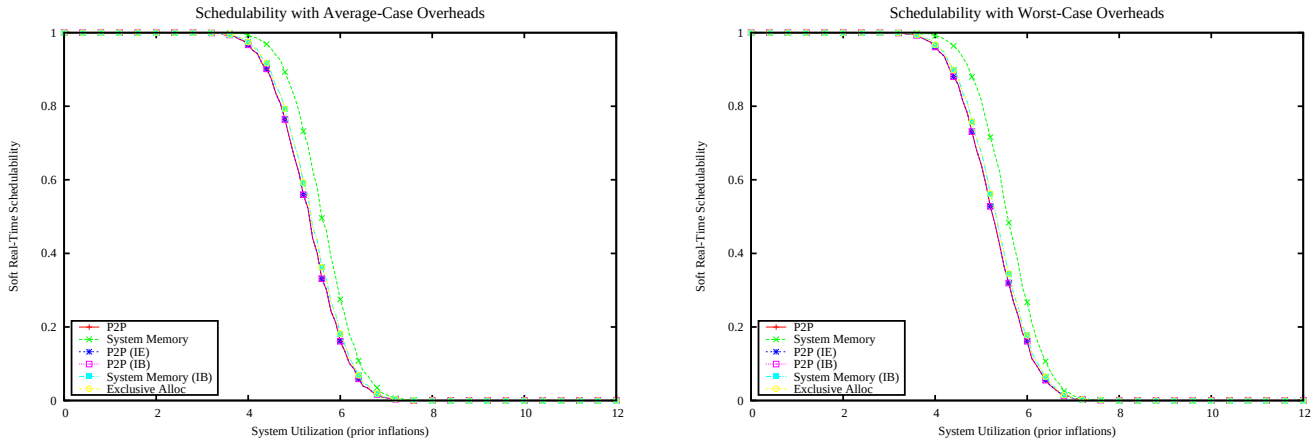

Figure 6869: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

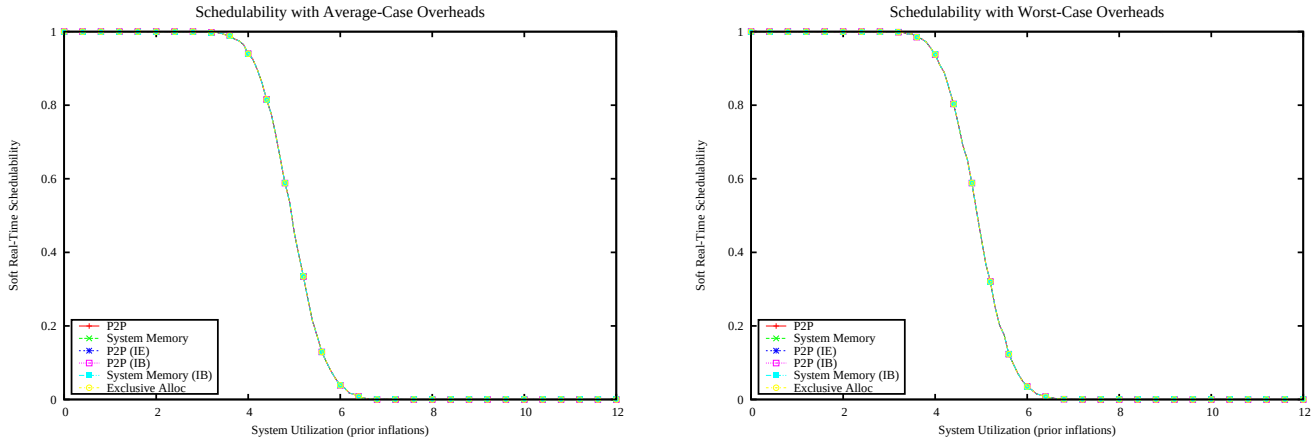

Figure 6870: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

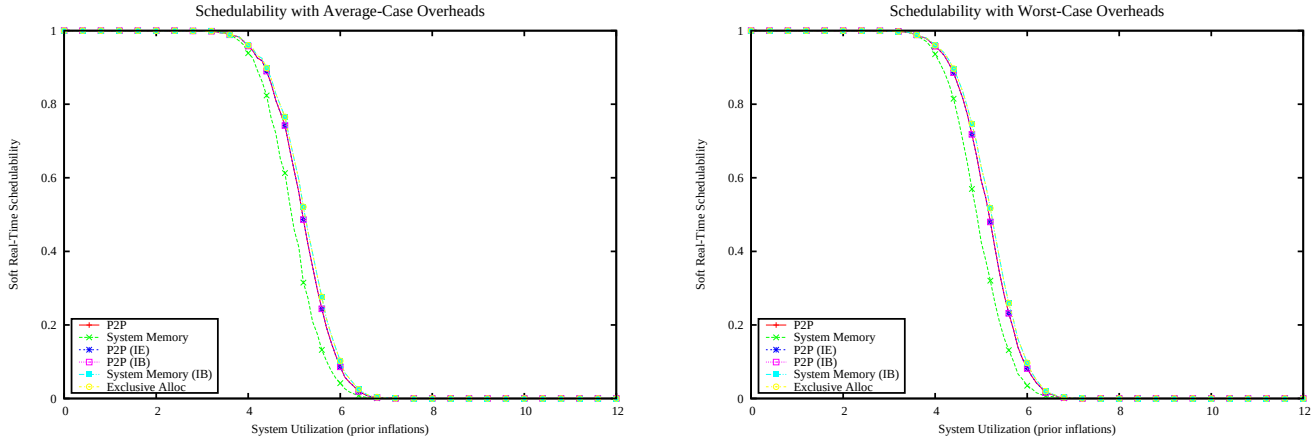

Figure 6871: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

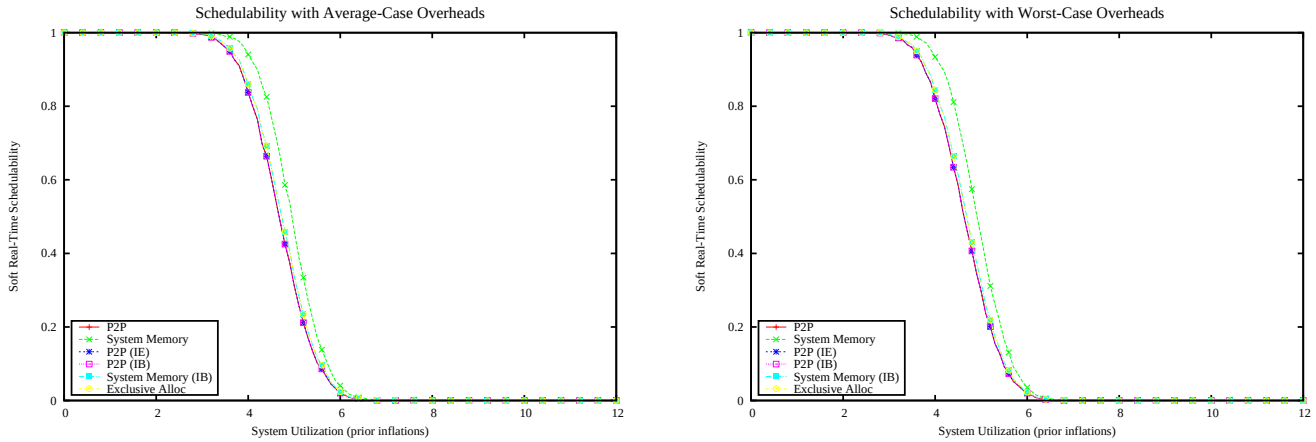

Figure 6872: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

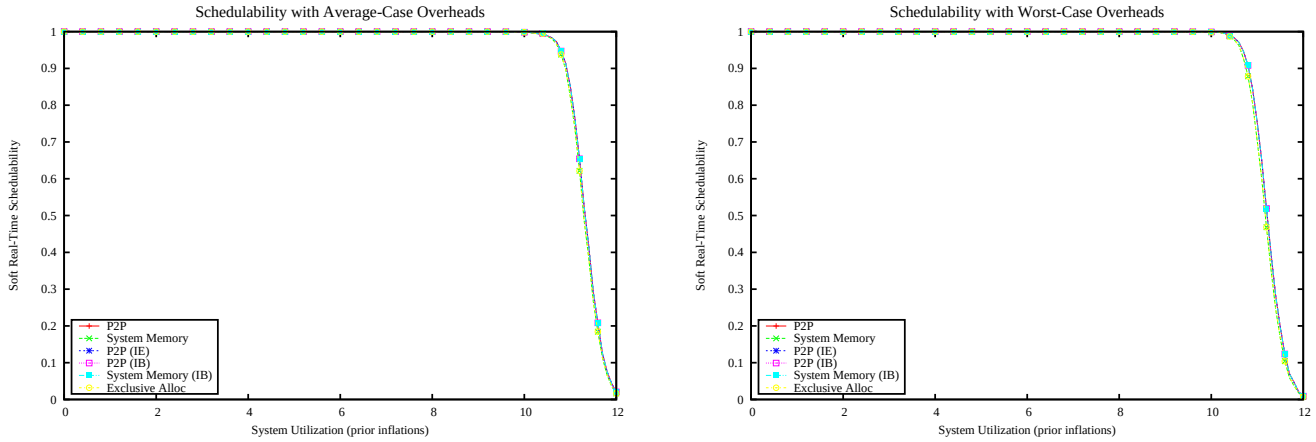

Figure 6873: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

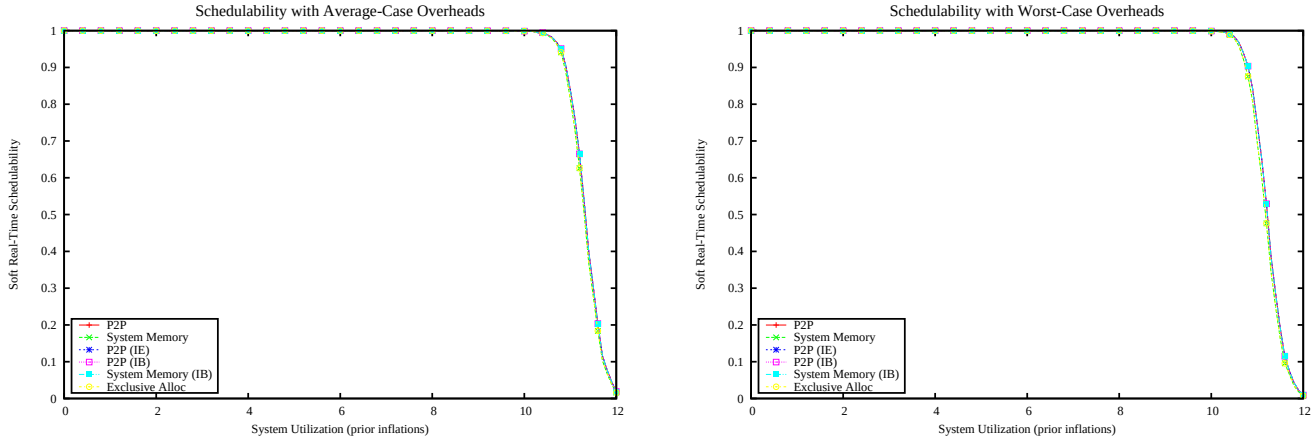

Figure 6874: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

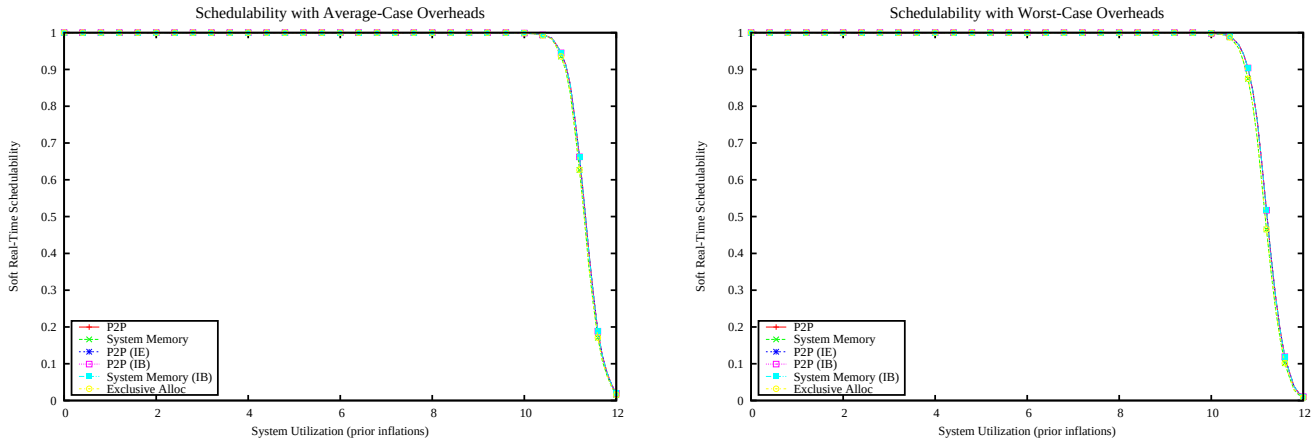

Figure 6875: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

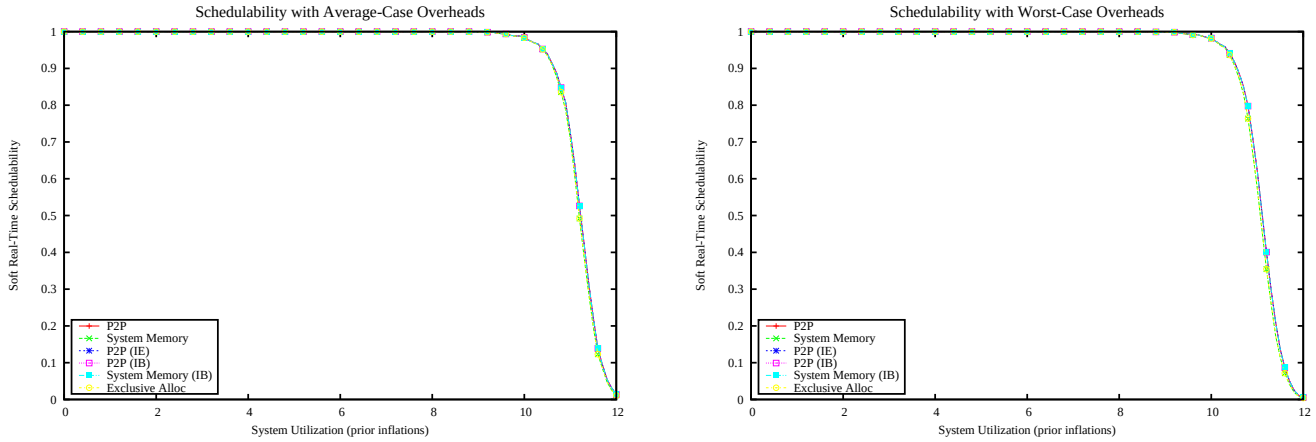

Figure 6876: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

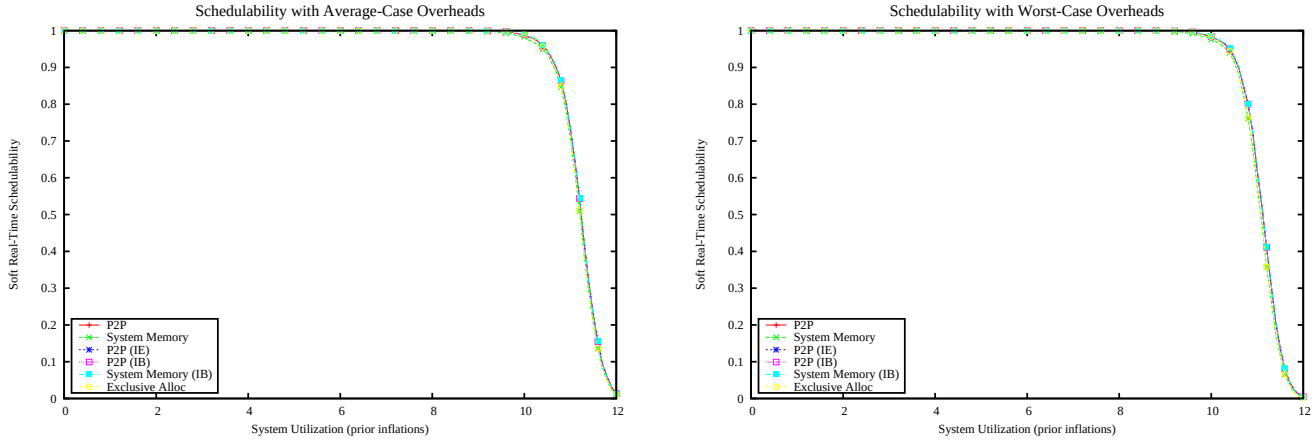

Figure 6877: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

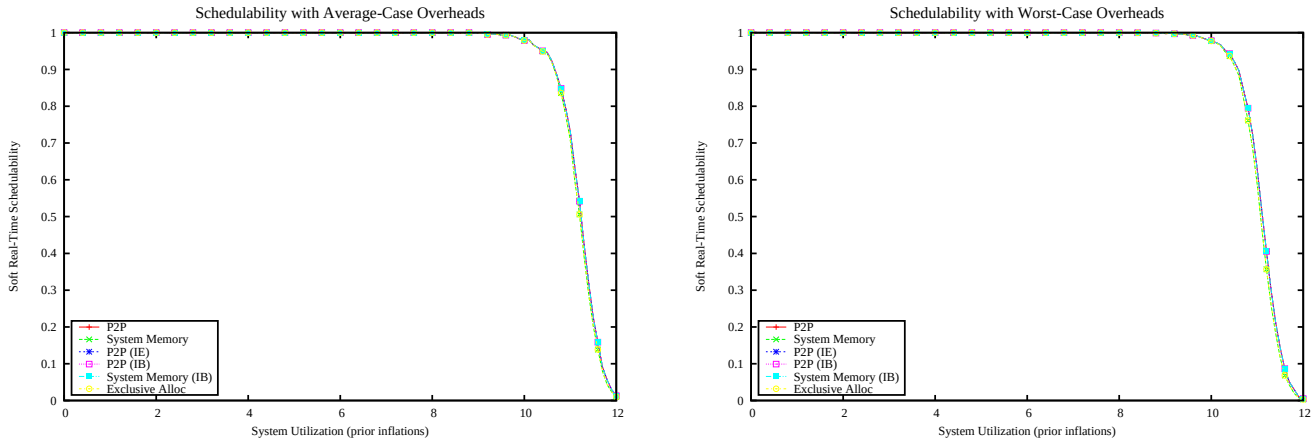

Figure 6878: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

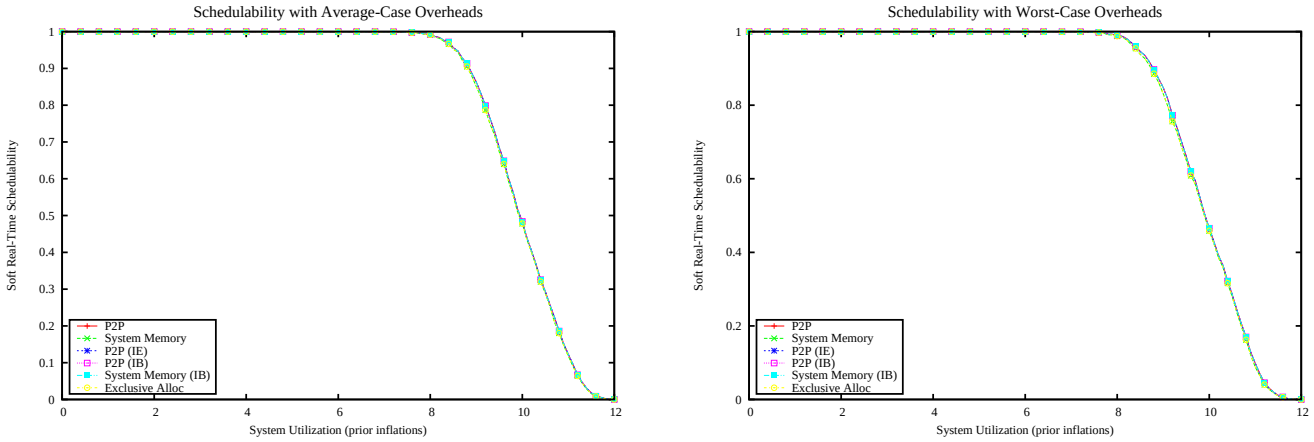

Figure 6879: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

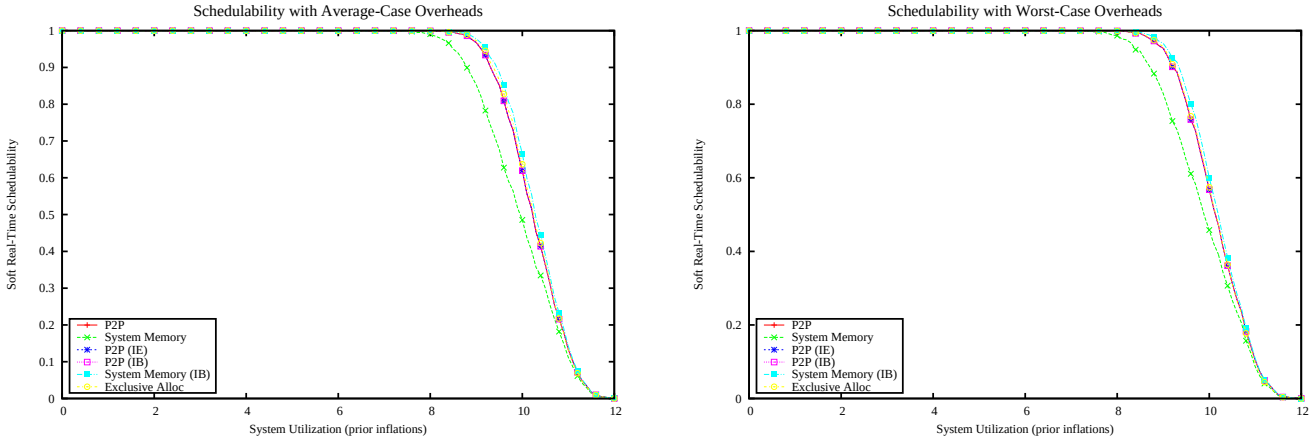

Figure 6880: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

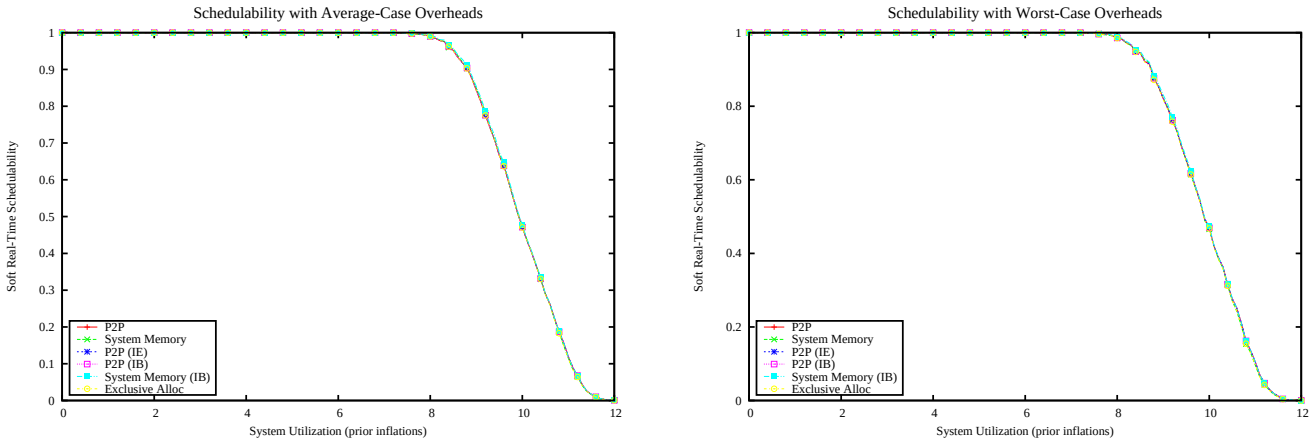

Figure 6881: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

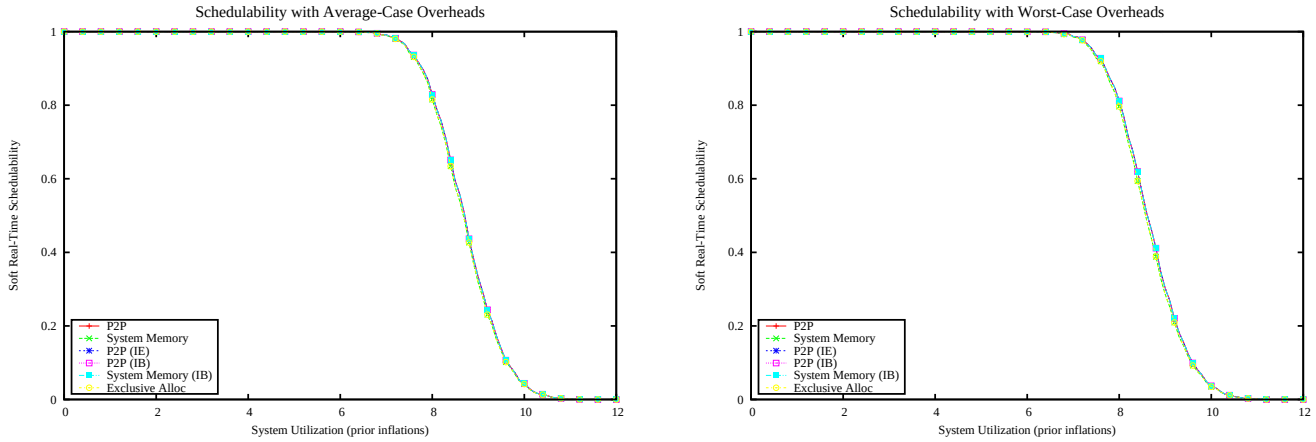

Figure 6882: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

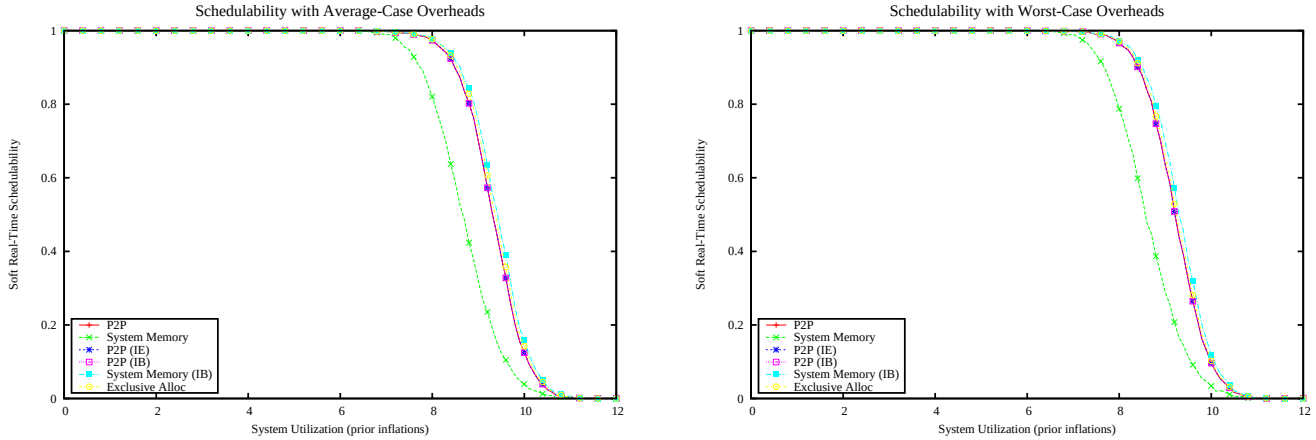

Figure 6883: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

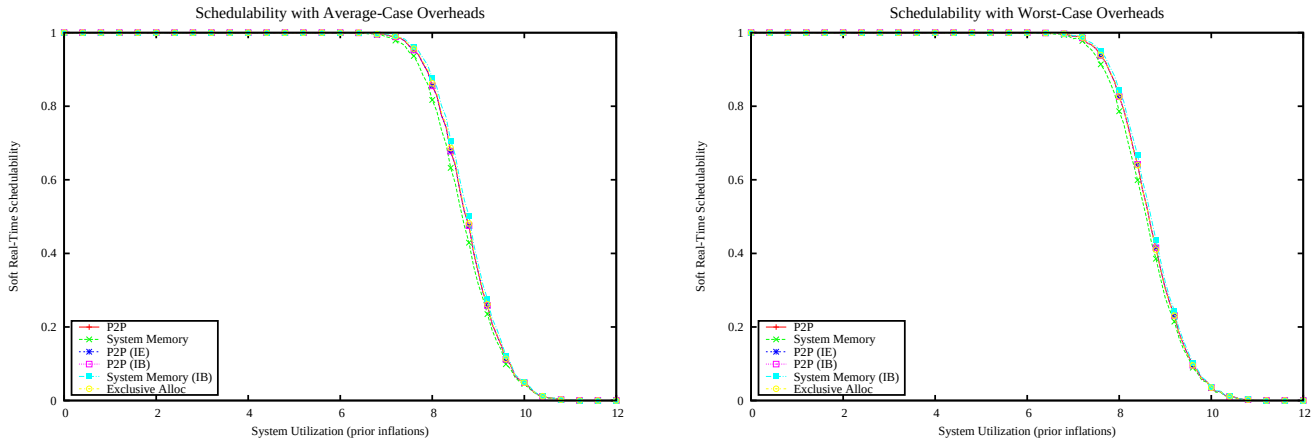

Figure 6884: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

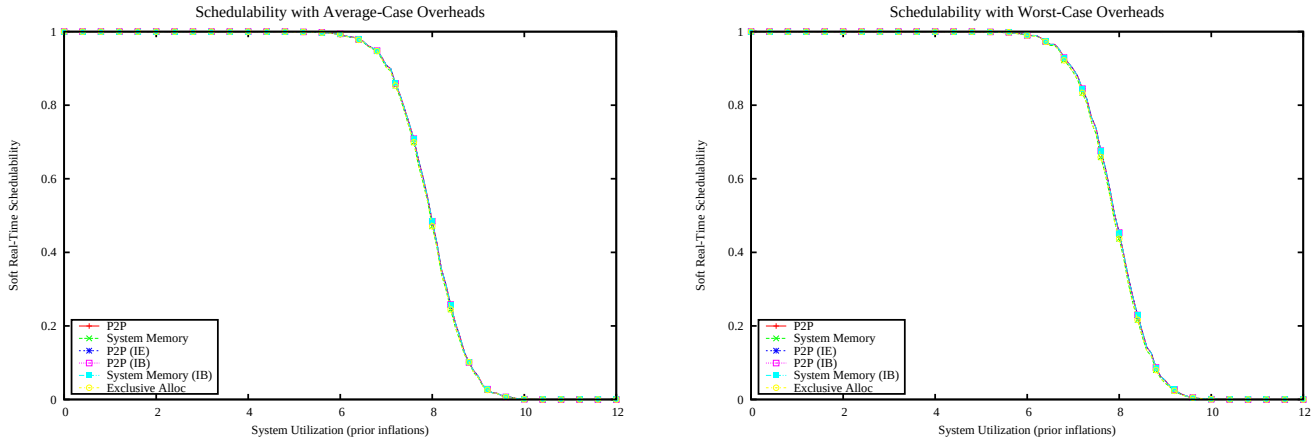

Figure 6885: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

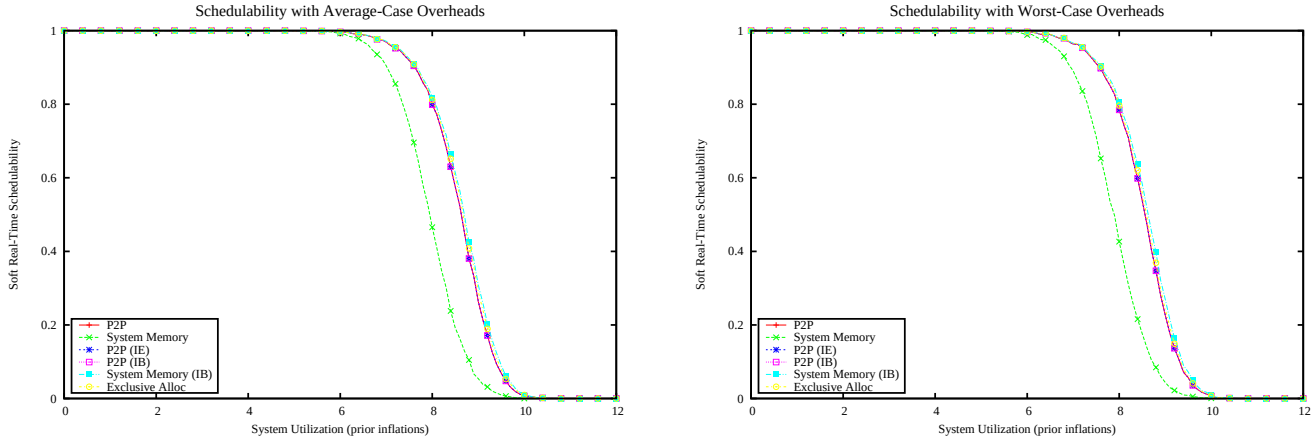

Figure 6886: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

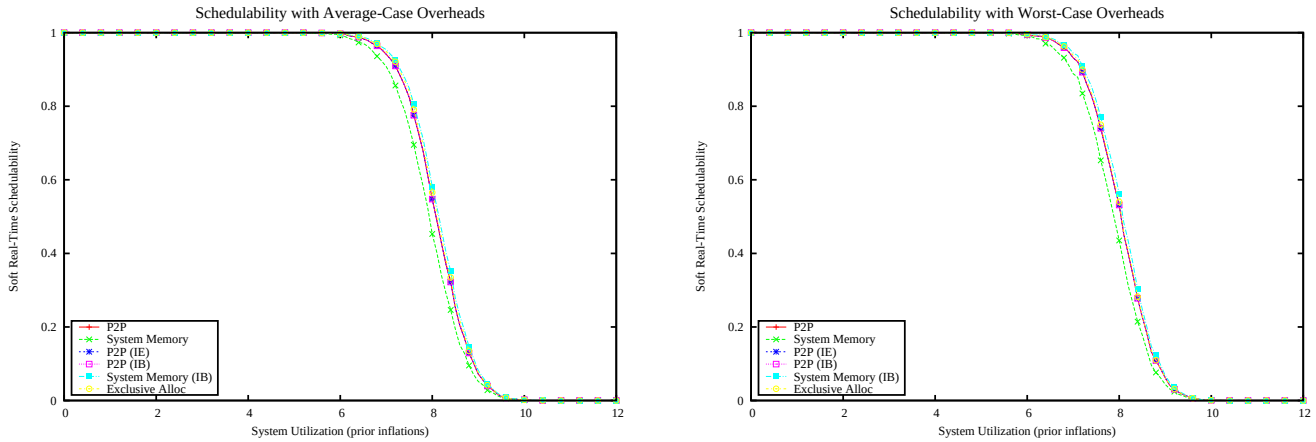

Figure 6887: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

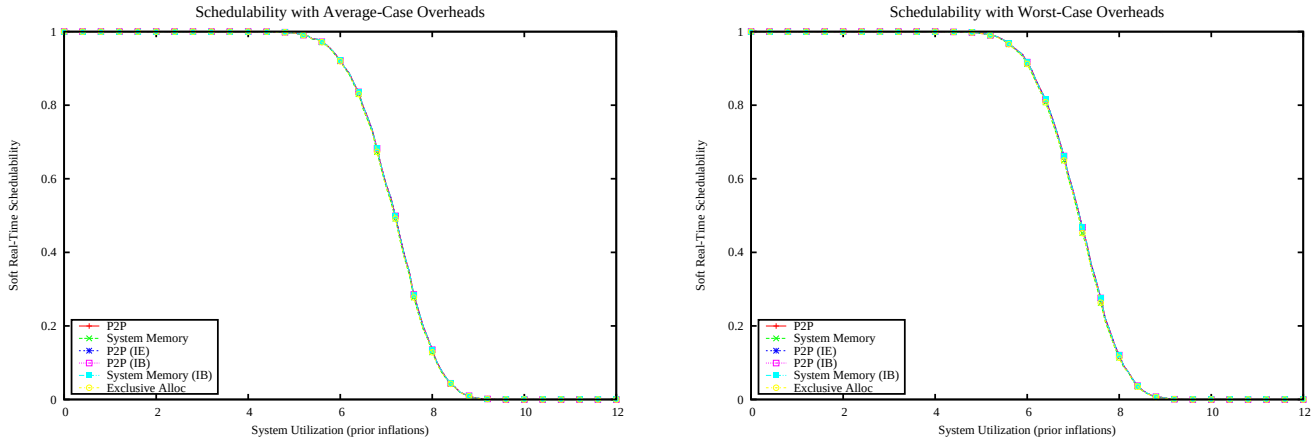

Figure 6888: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

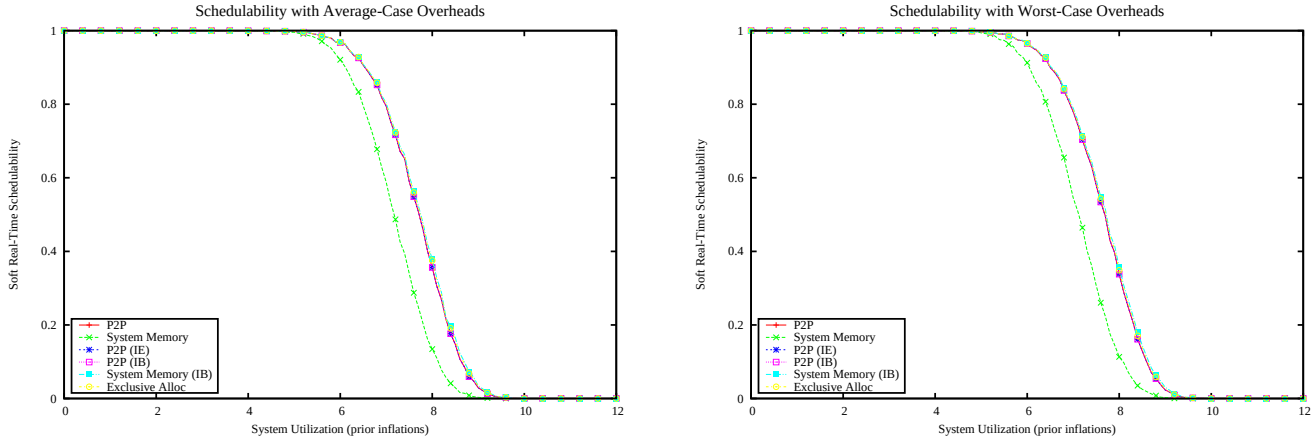

Figure 6889: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

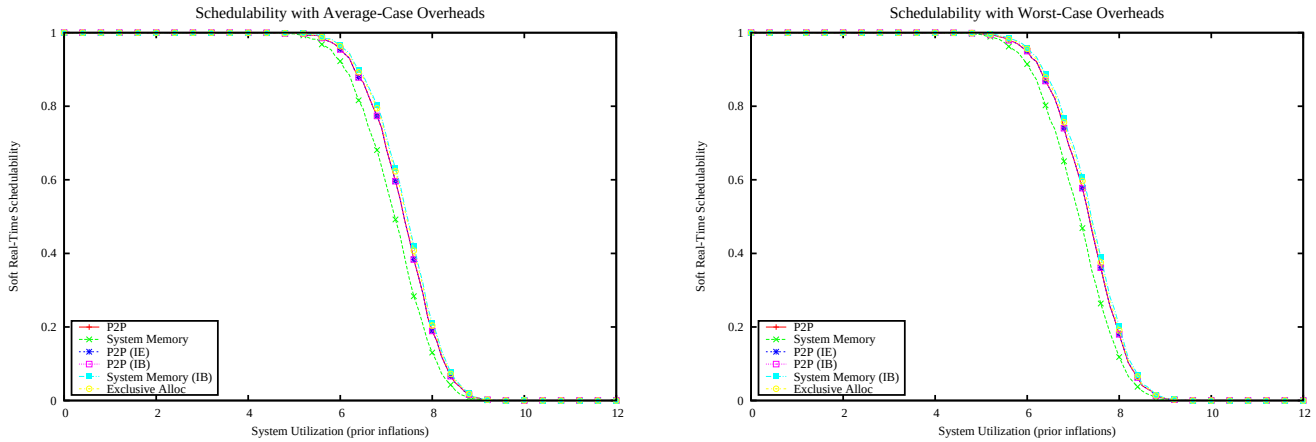

Figure 6890: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

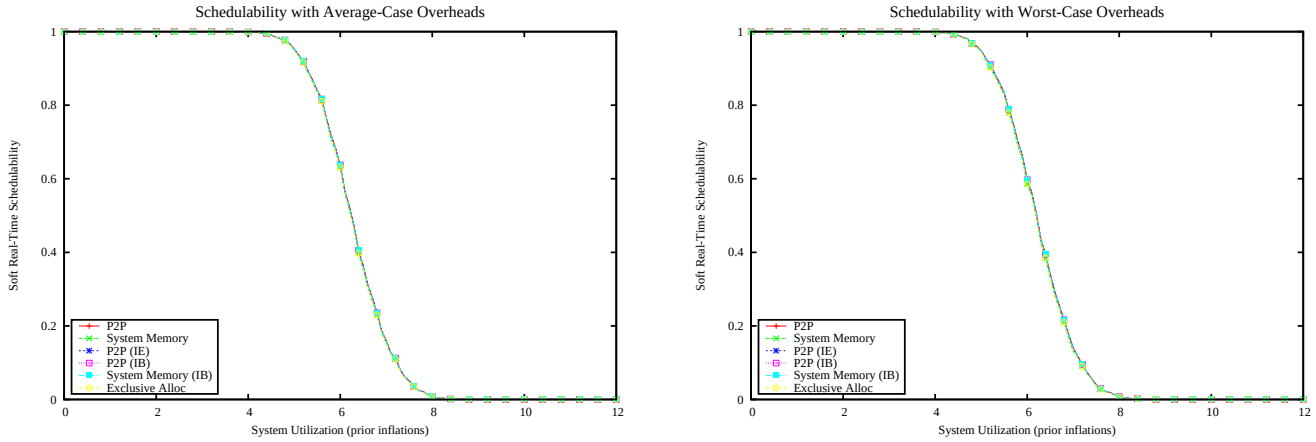

Figure 6891: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

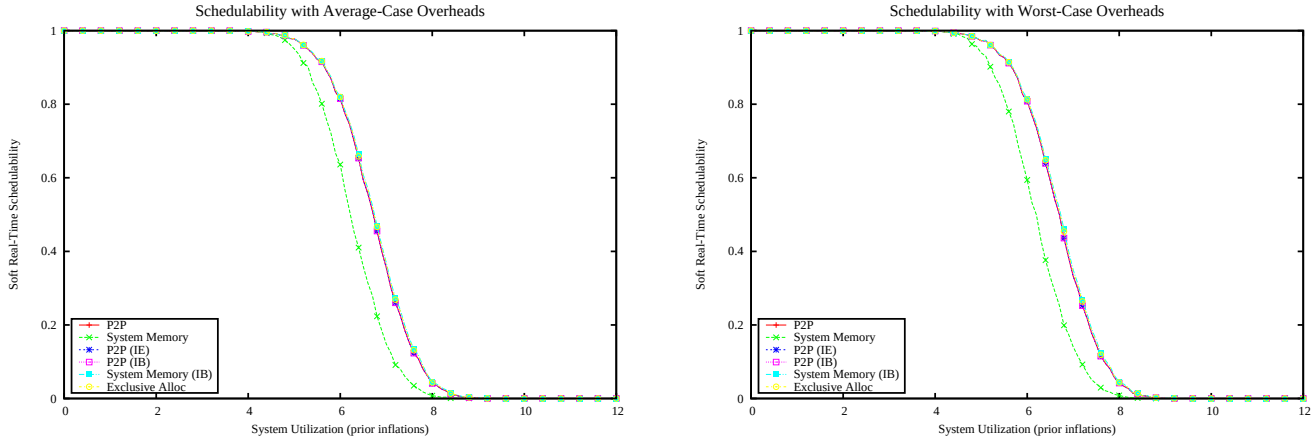

Figure 6892: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

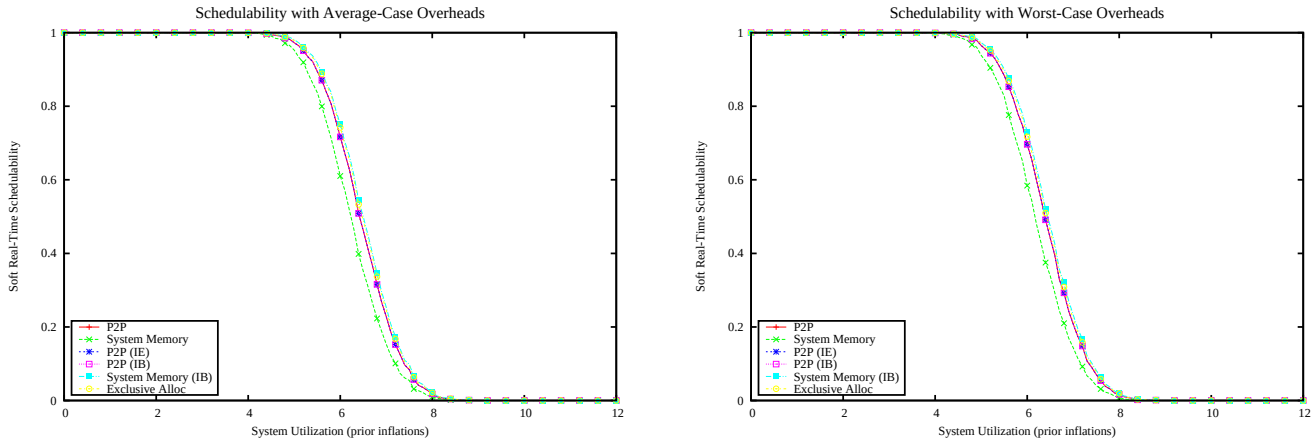

Figure 6893: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

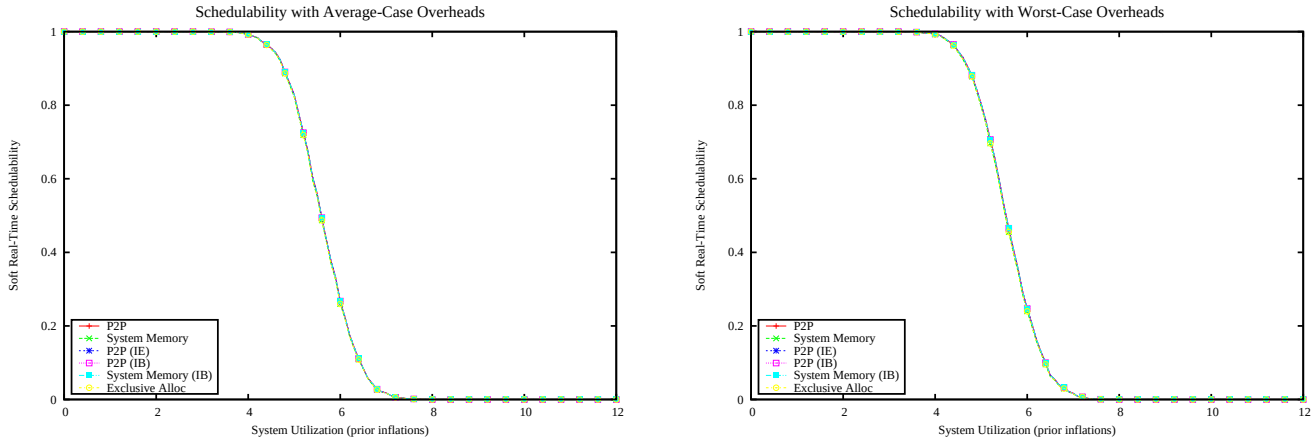

Figure 6894: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

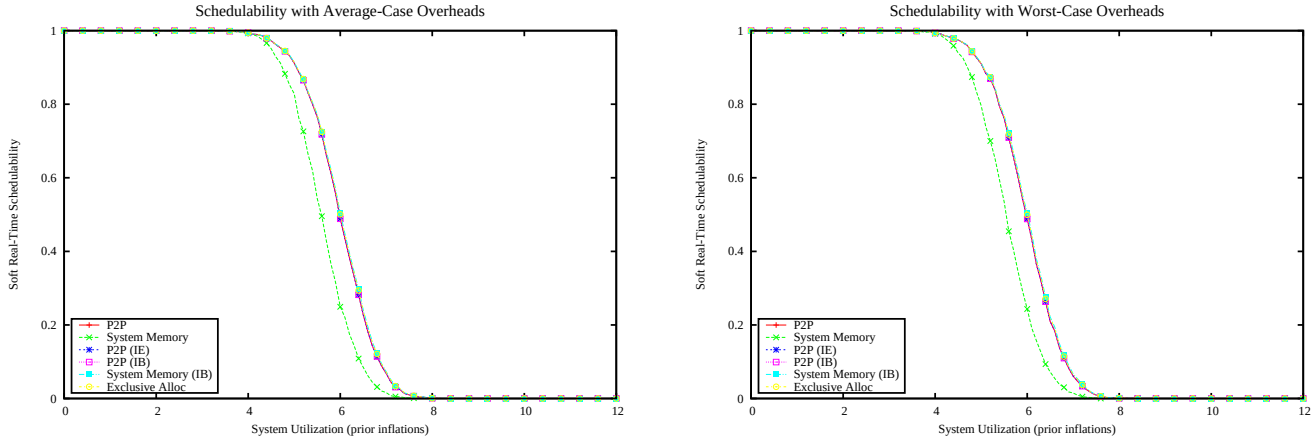

Figure 6895: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

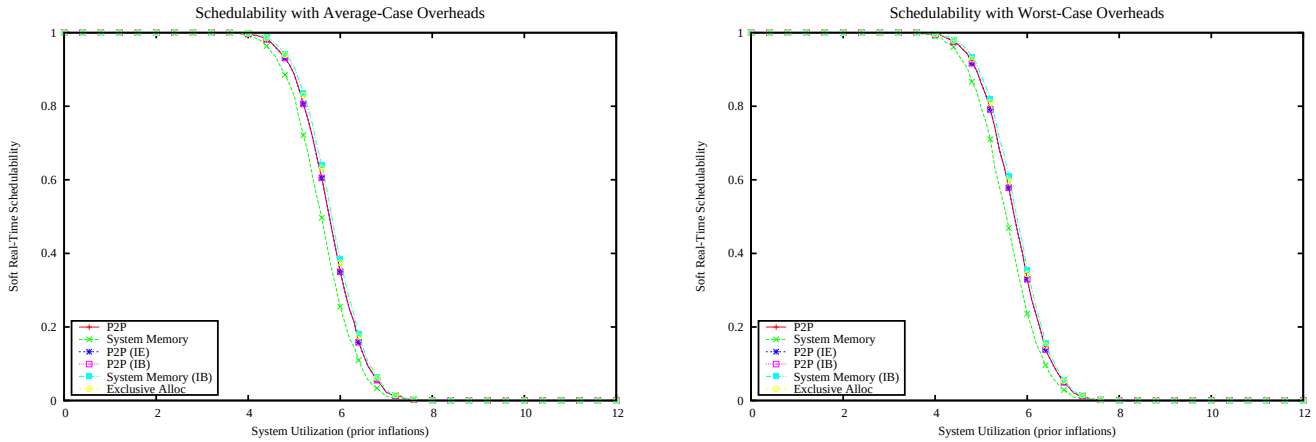

Figure 6896: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

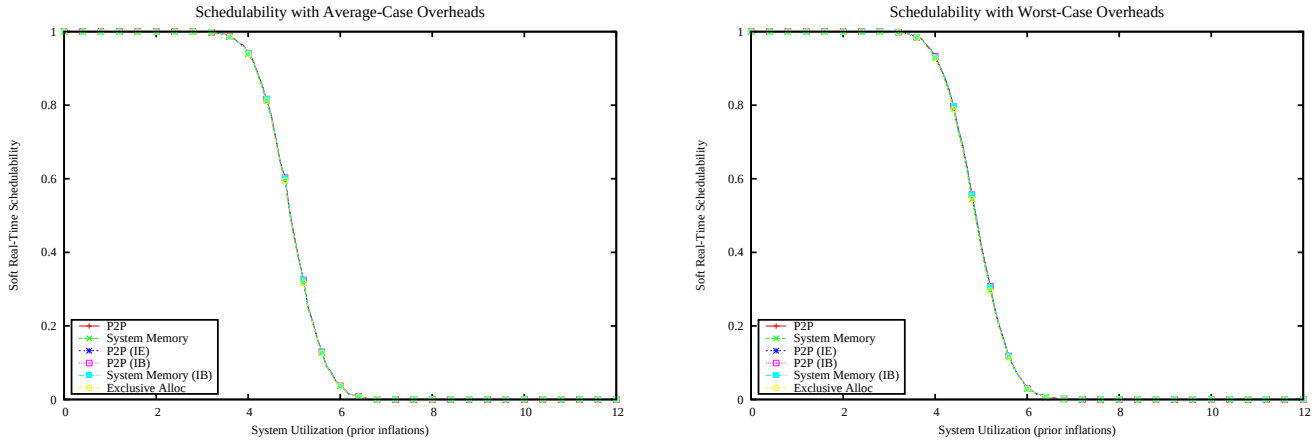

Figure 6897: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

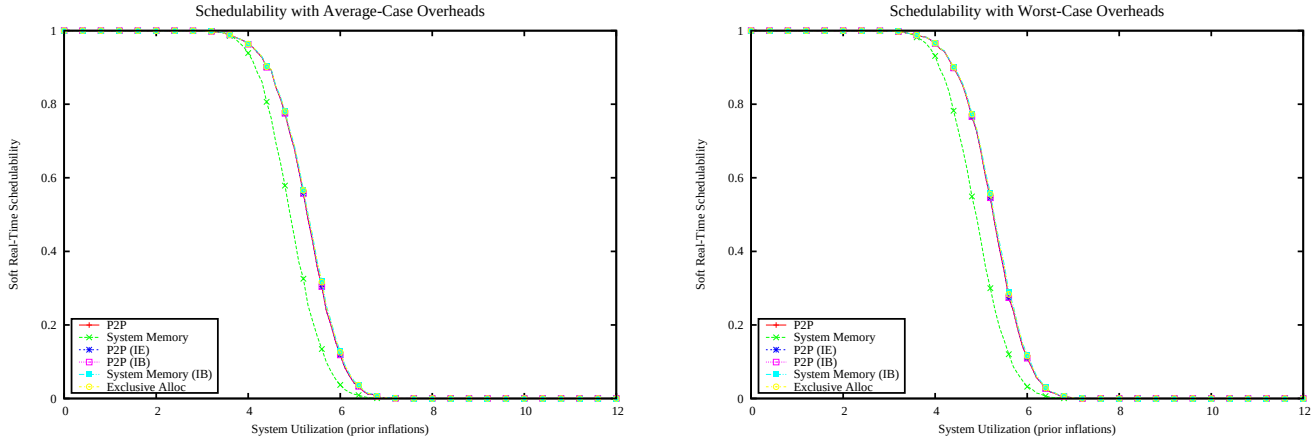

Figure 6898: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

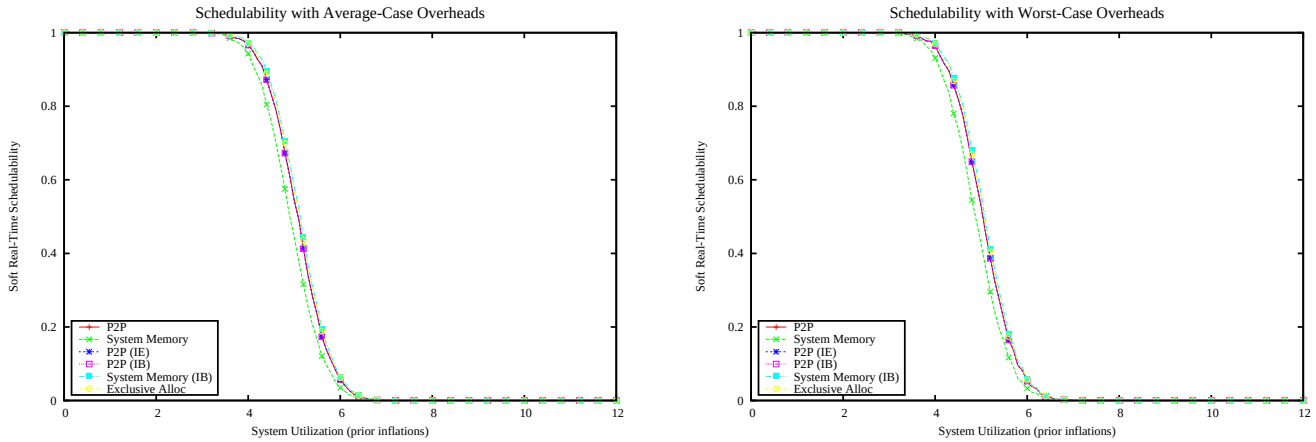

Figure 6899: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

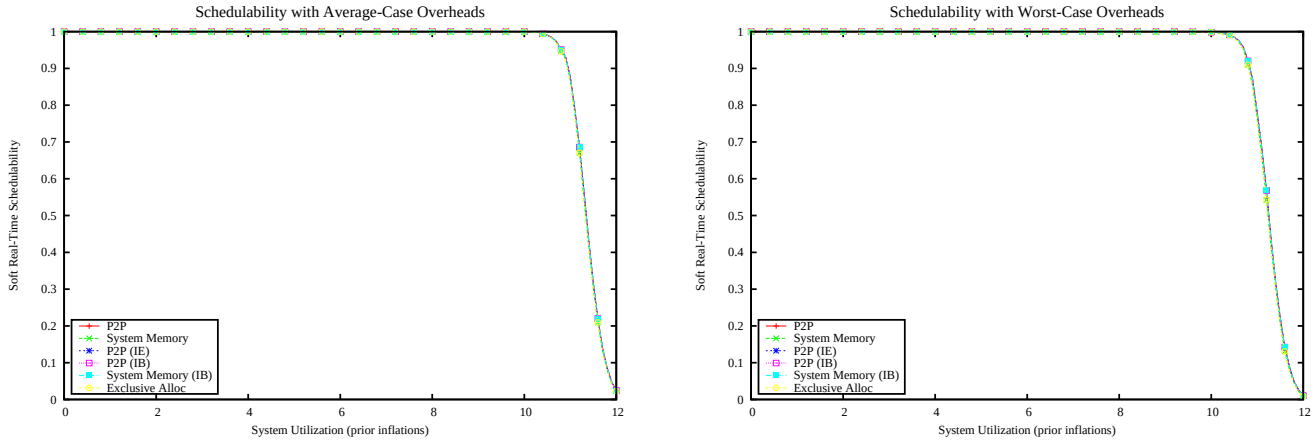

Figure 6900: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

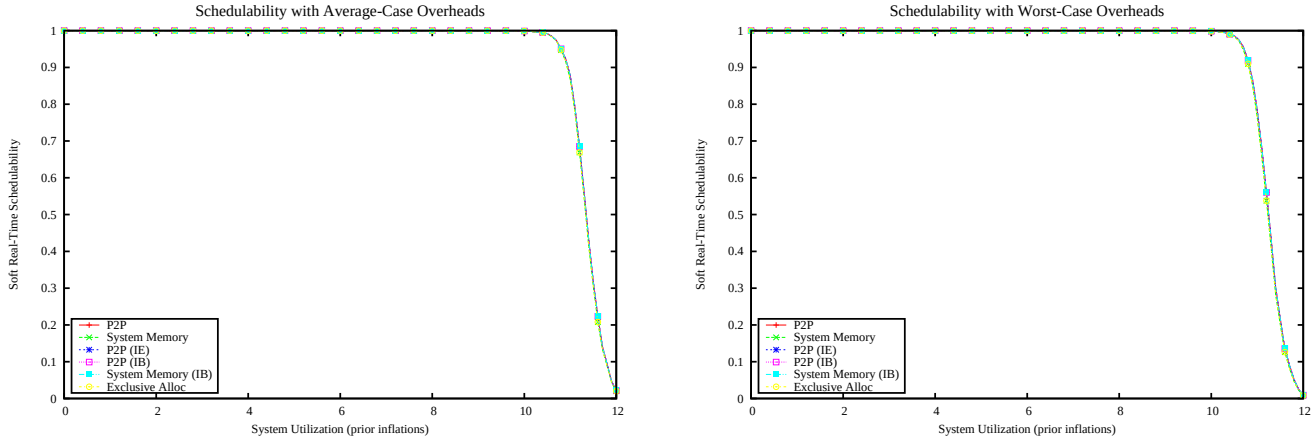

Figure 6901: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

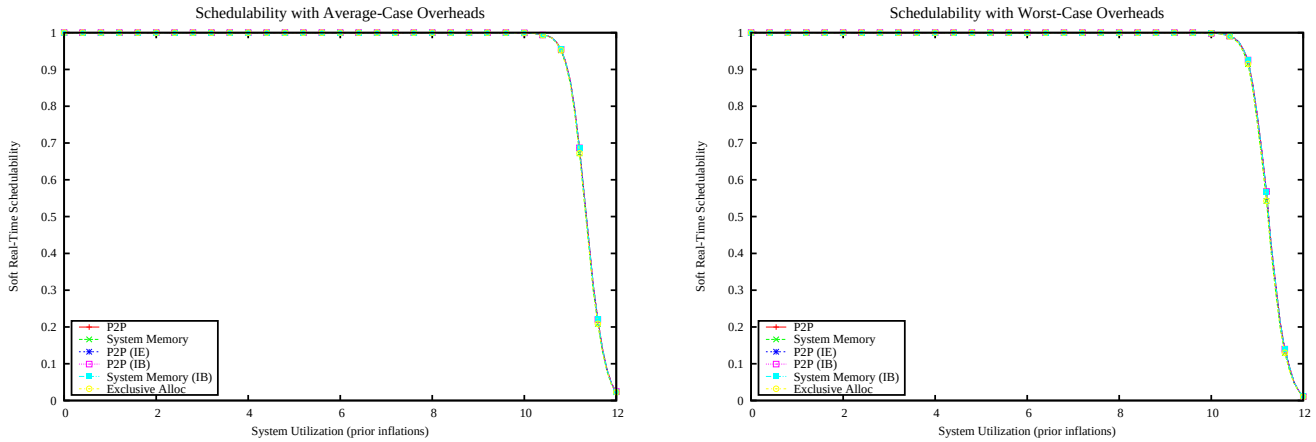

Figure 6902: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

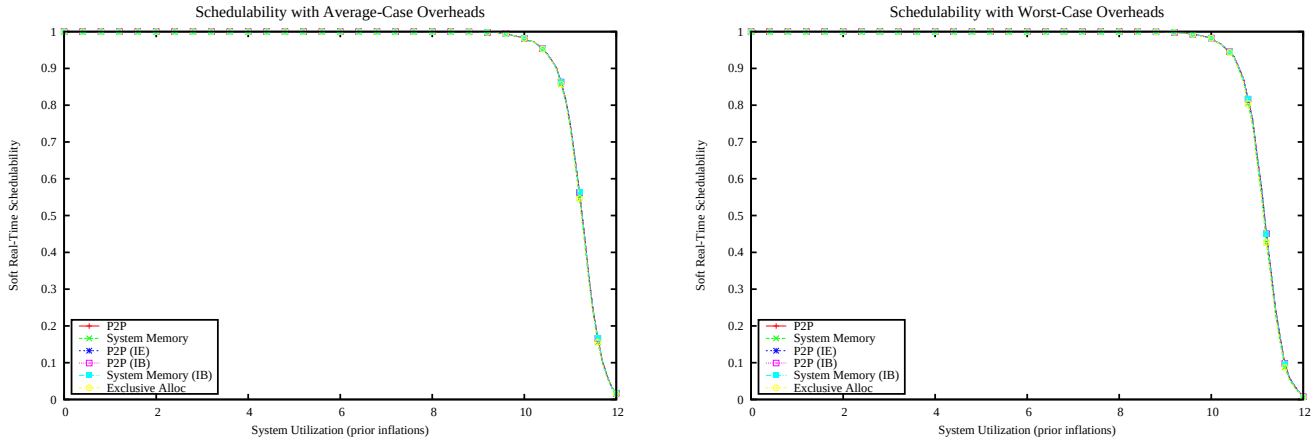

Figure 6903: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

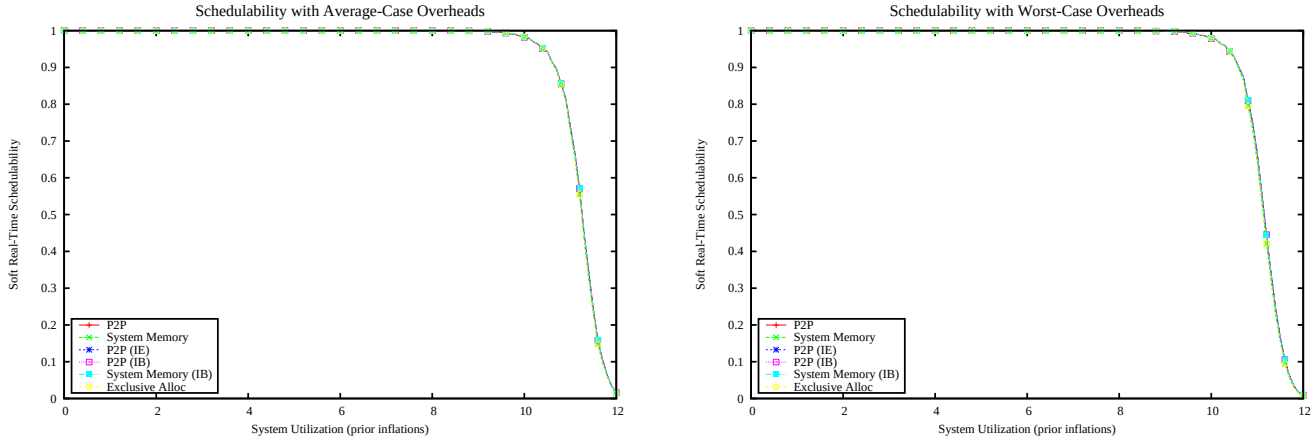

Figure 6904: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

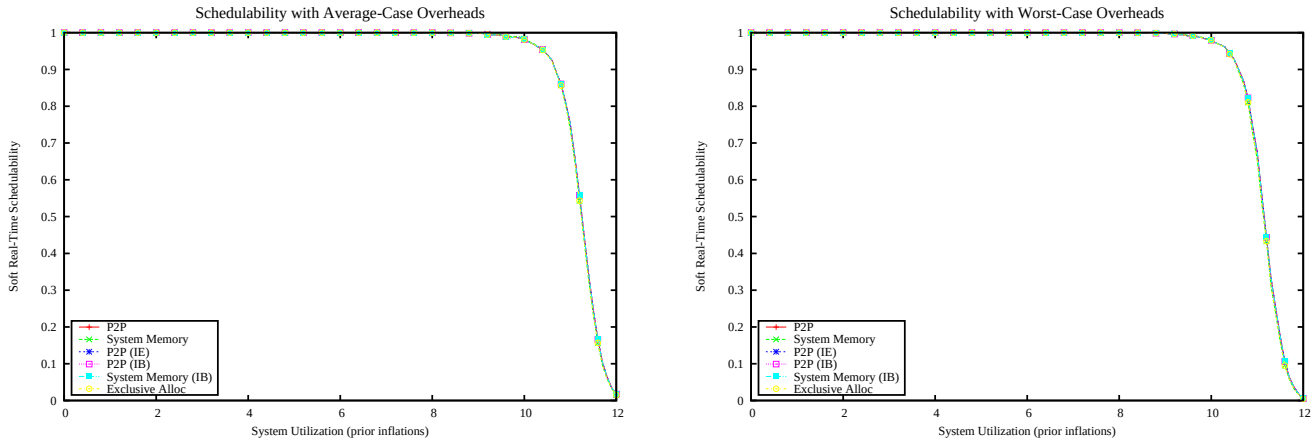

Figure 6905: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

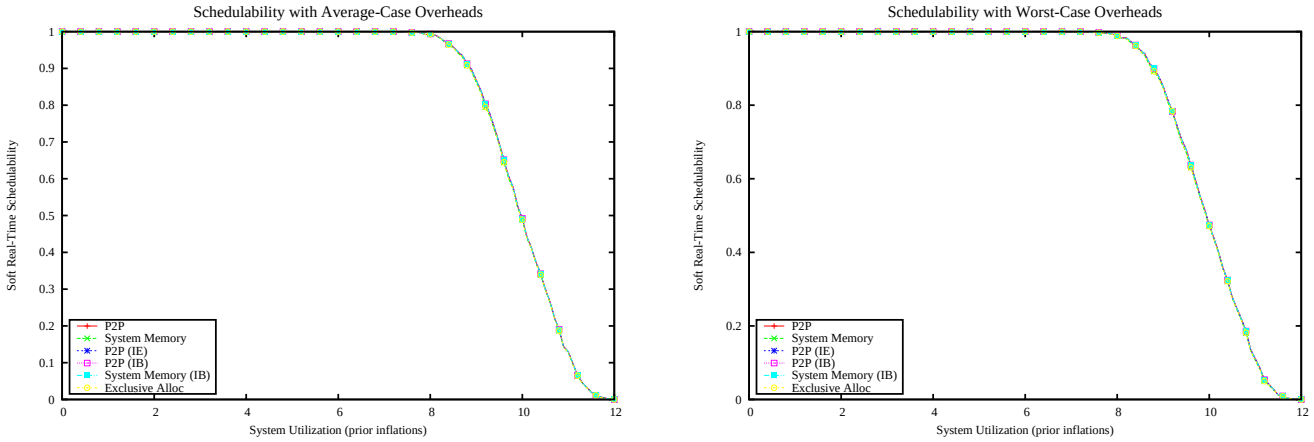

Figure 6906: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

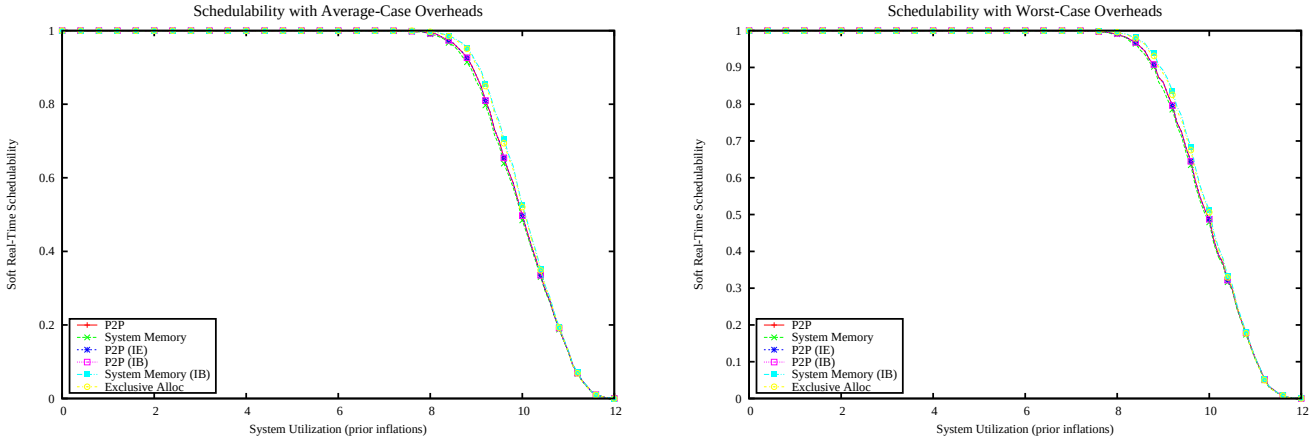

Figure 6907: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

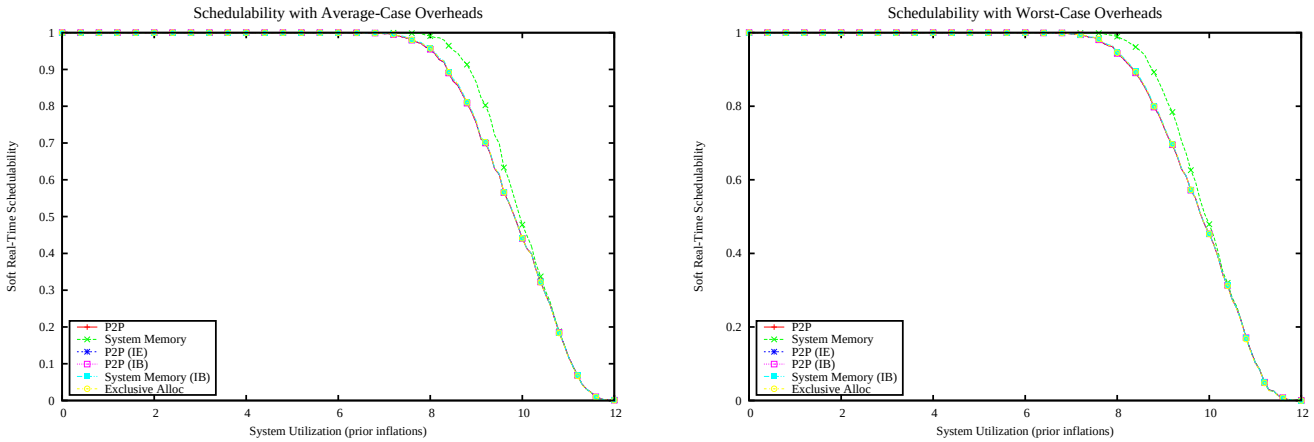

Figure 6908: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

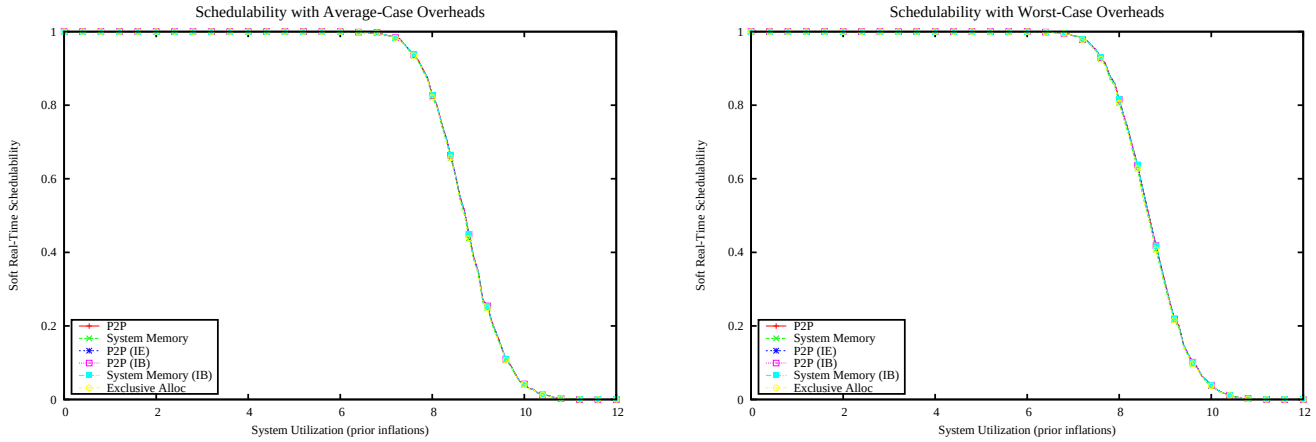

Figure 6909: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

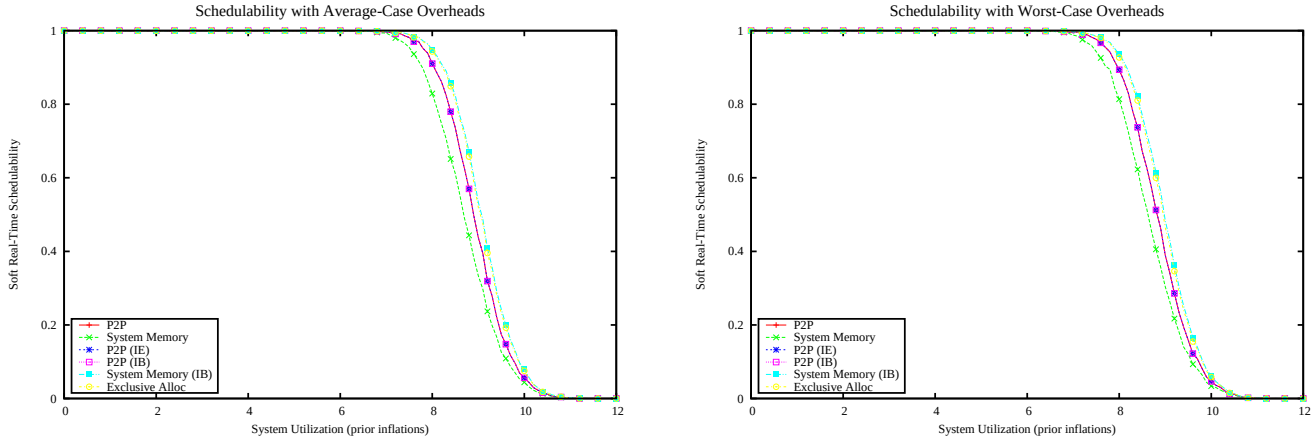

Figure 6910: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

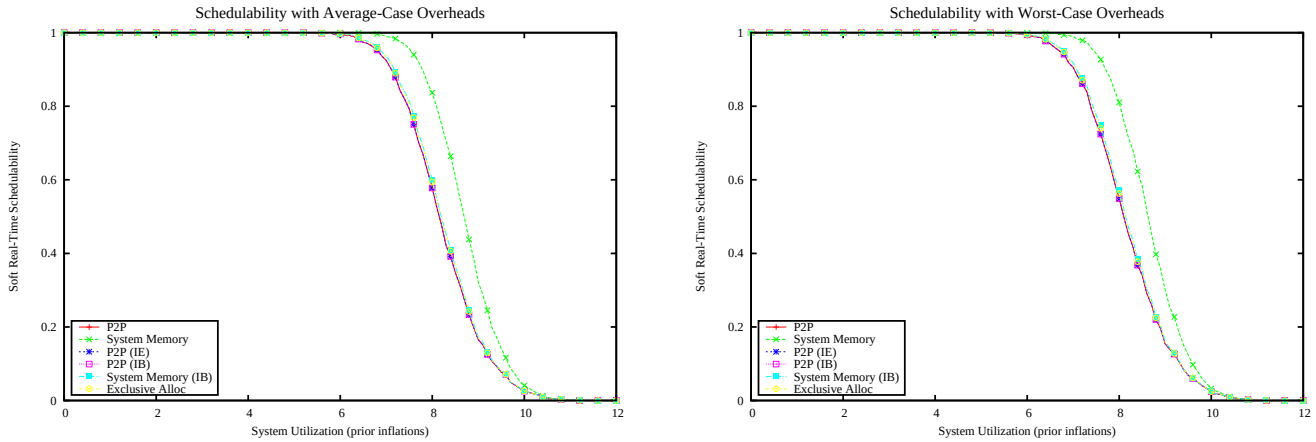

Figure 6911: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

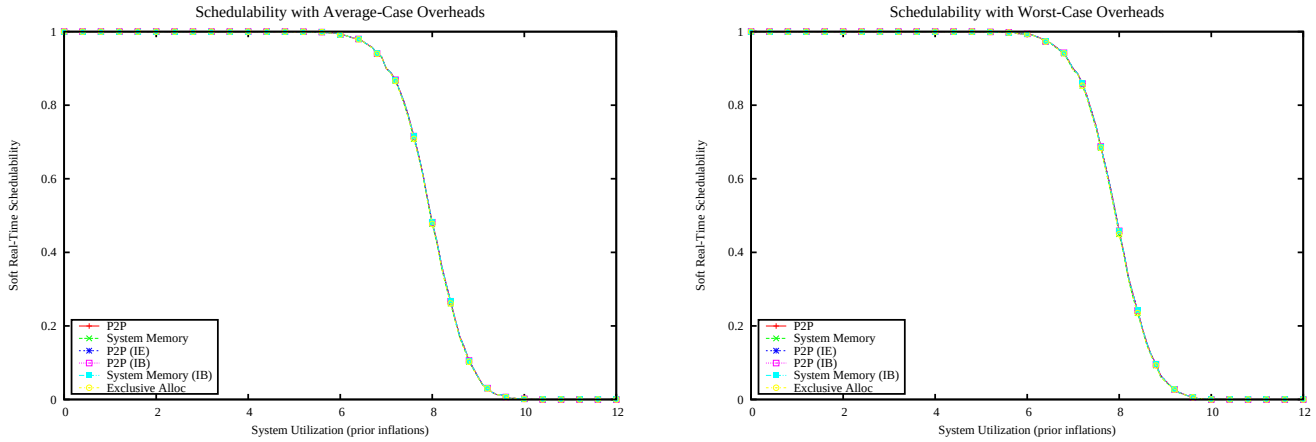

Figure 6912: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

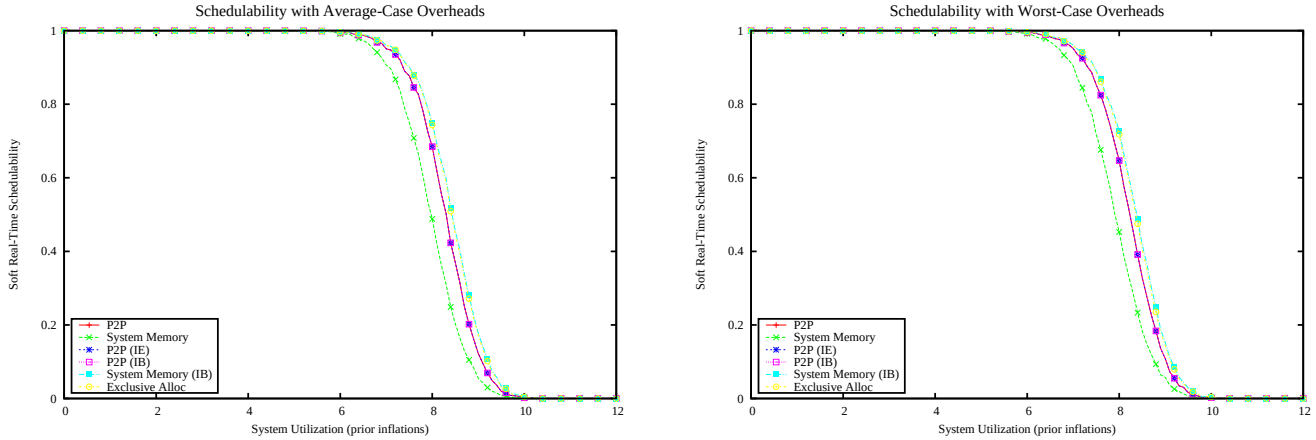

Figure 6913: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

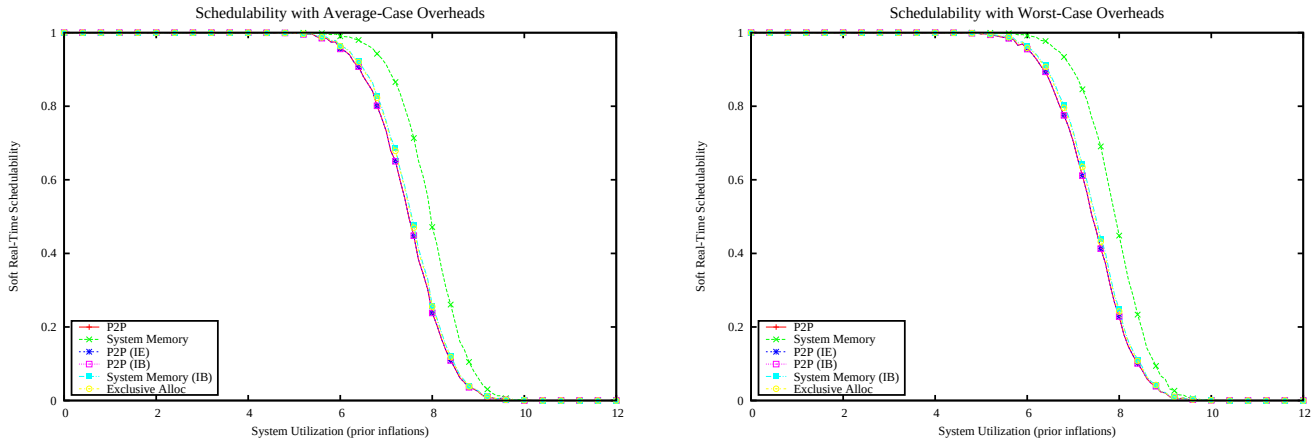

Figure 6914: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

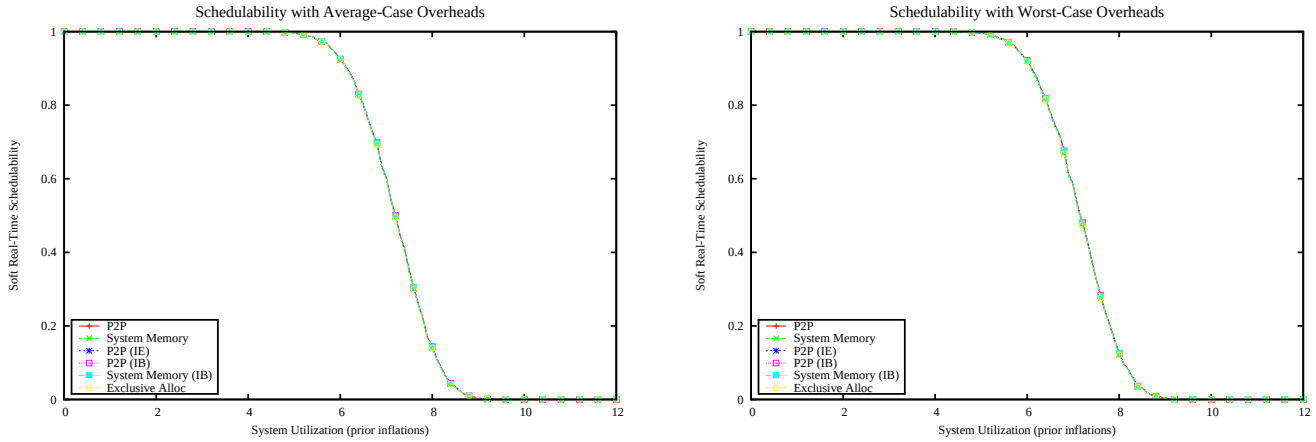

Figure 6915: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

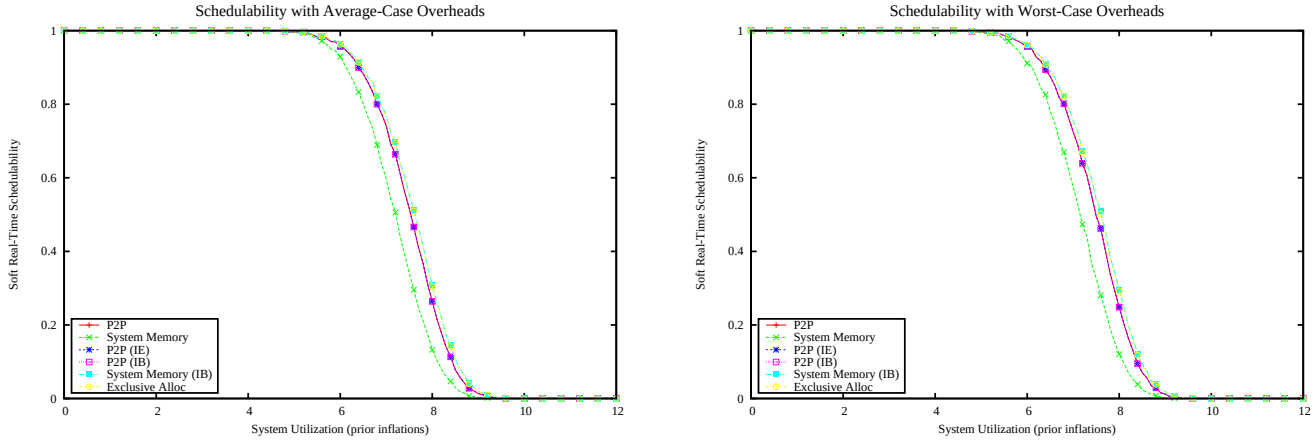

Figure 6916: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

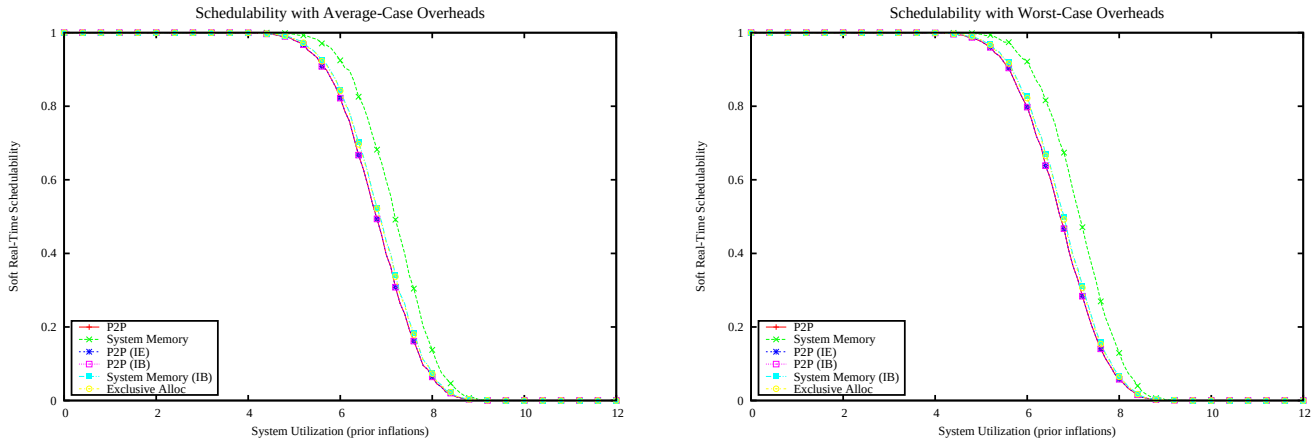

Figure 6917: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

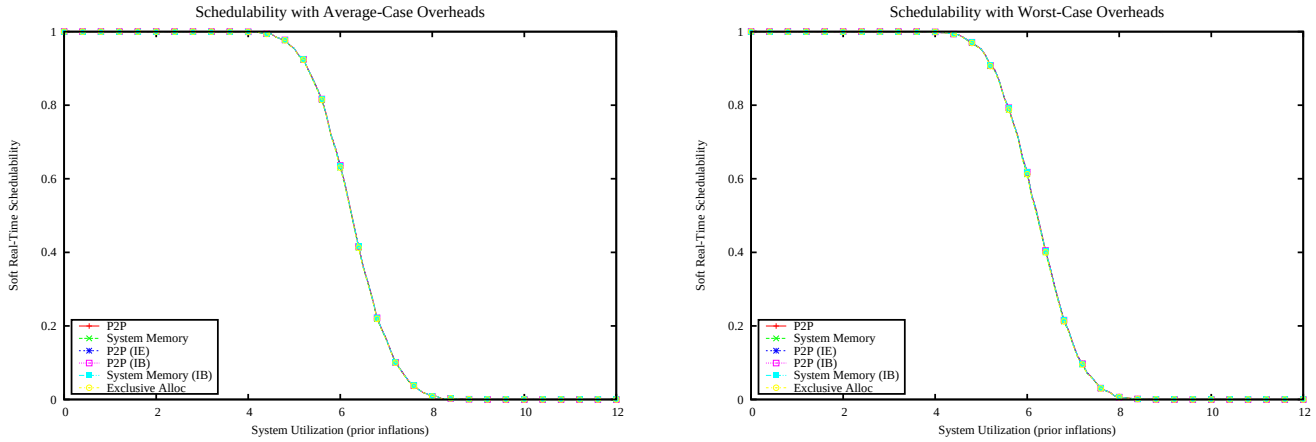

Figure 6918: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

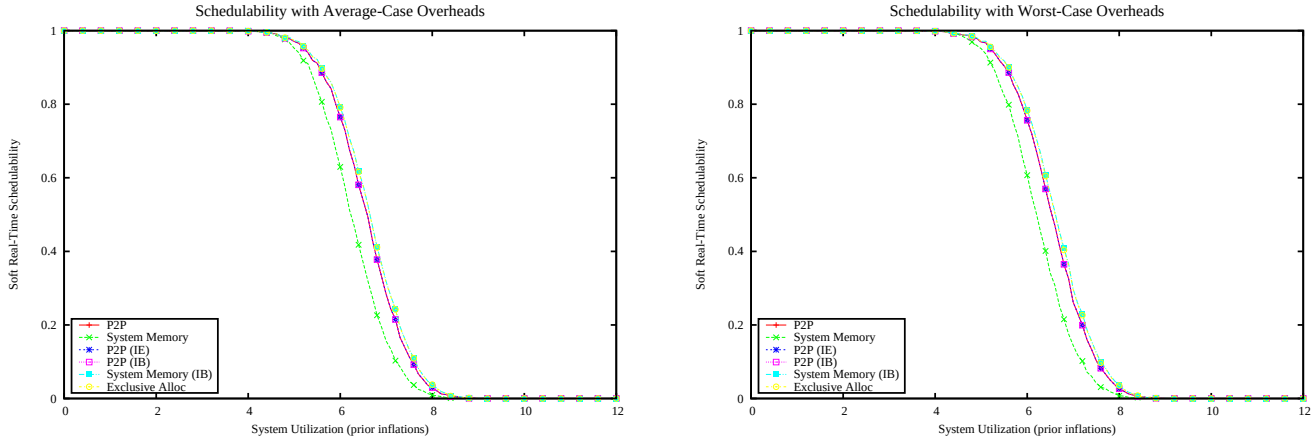

Figure 6919: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

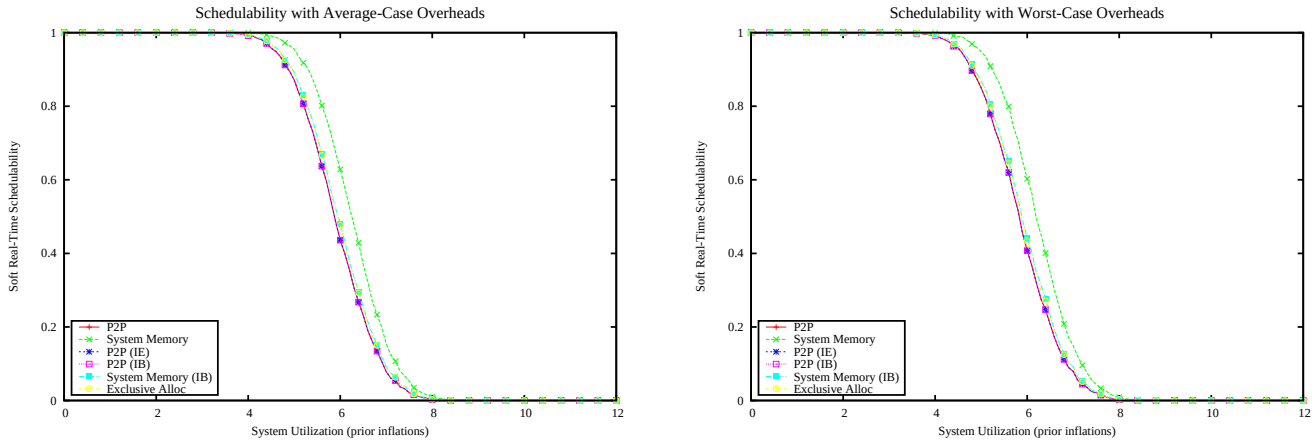

Figure 6920: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

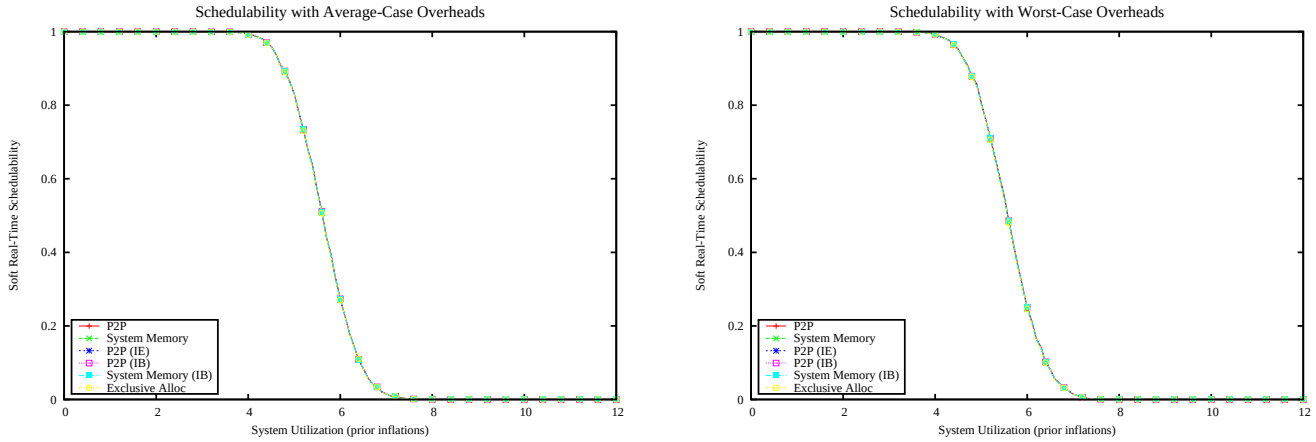

Figure 6921: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

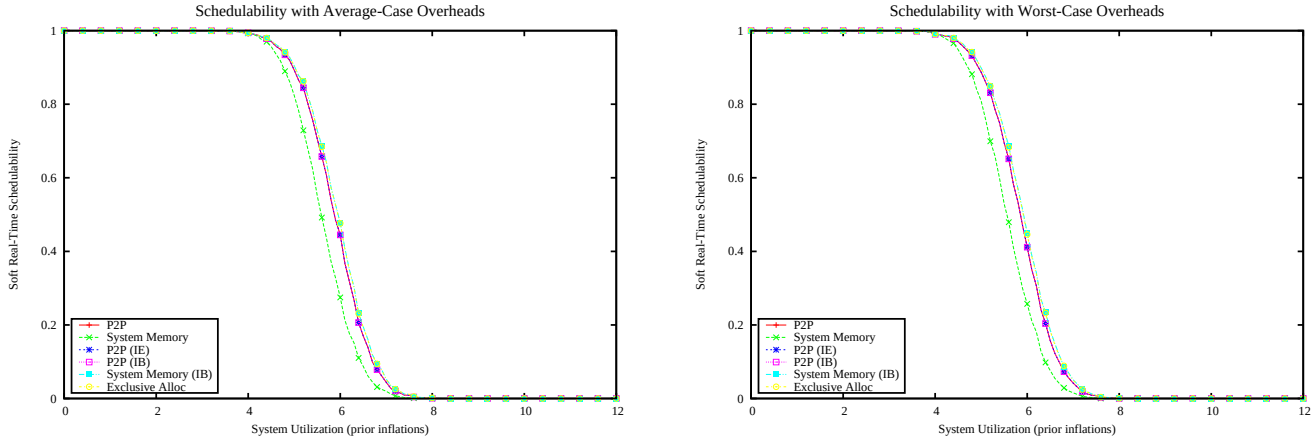

Figure 6922: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

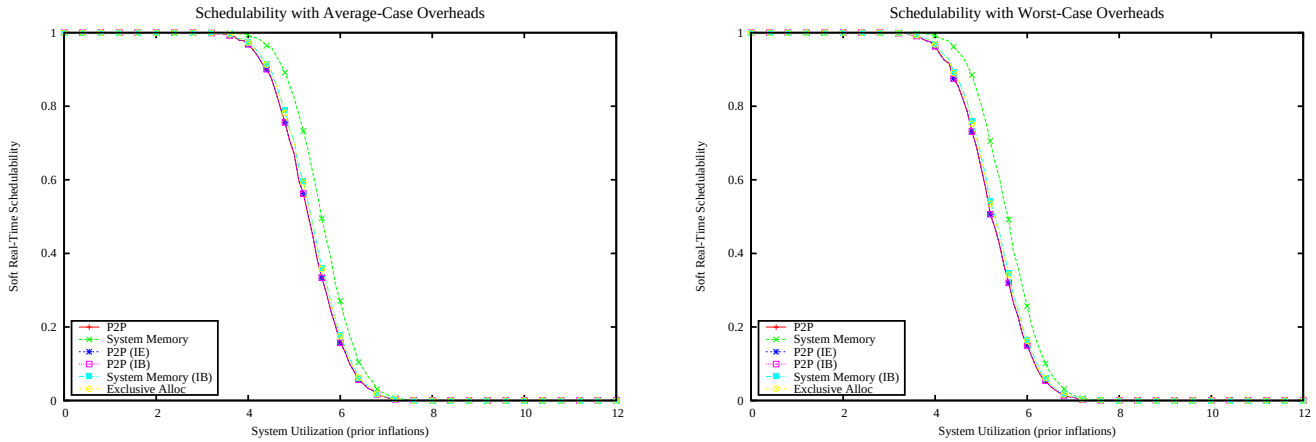

Figure 6923: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

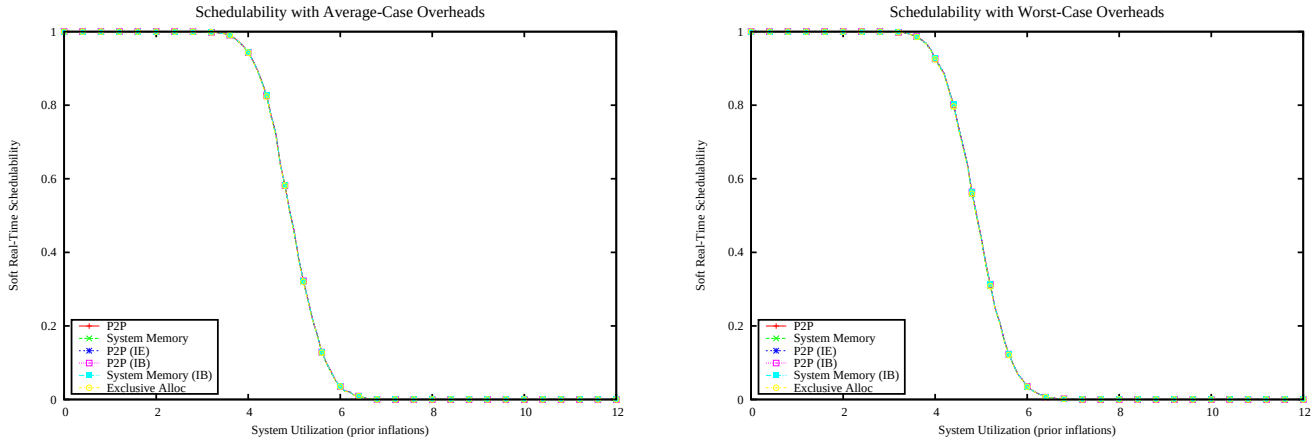

Figure 6924: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

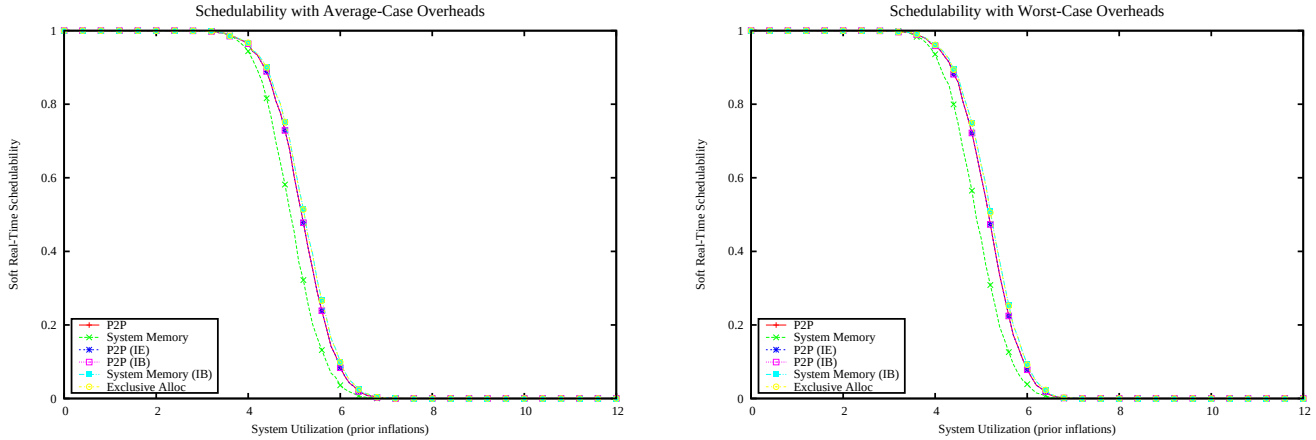

Figure 6925: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

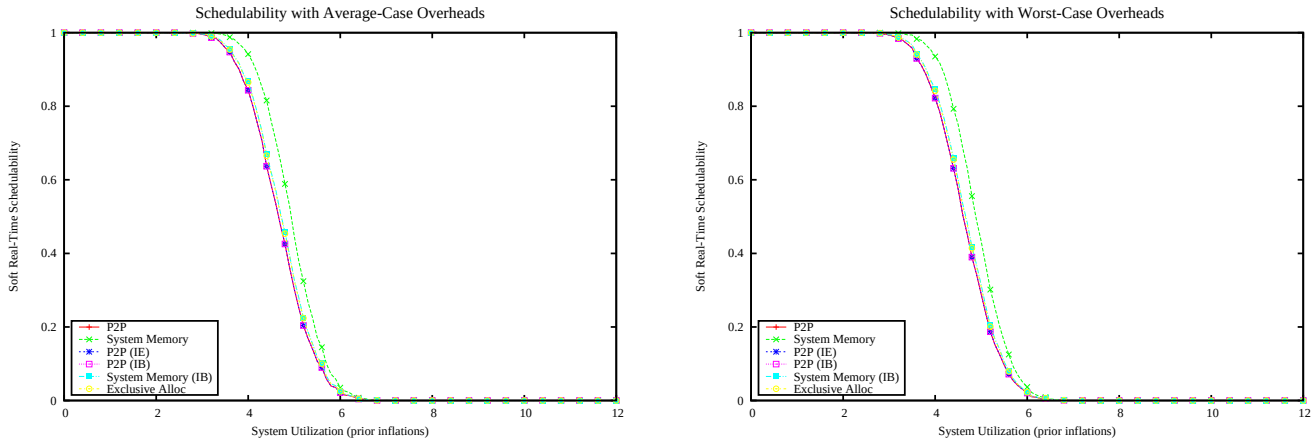

Figure 6926: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

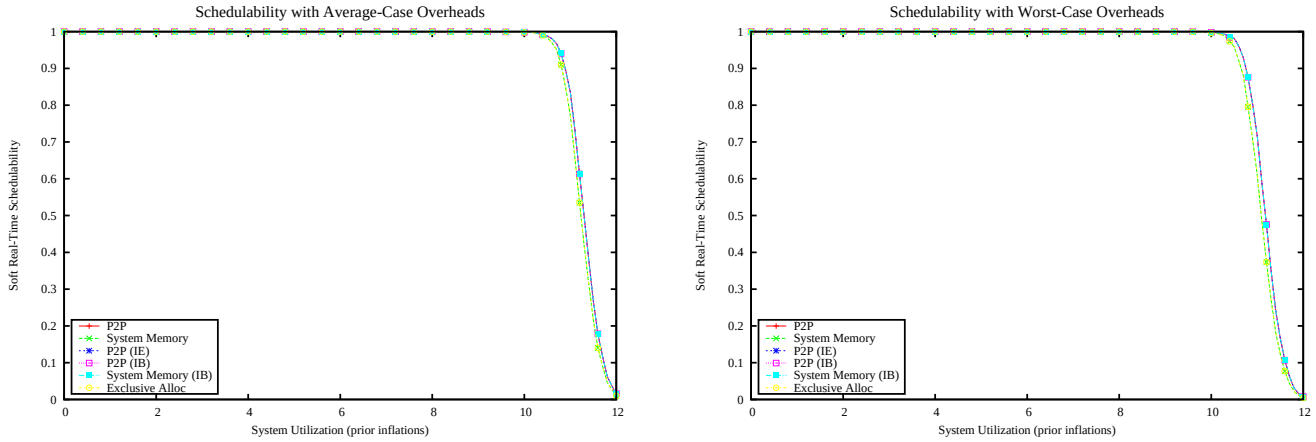

Figure 6927: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

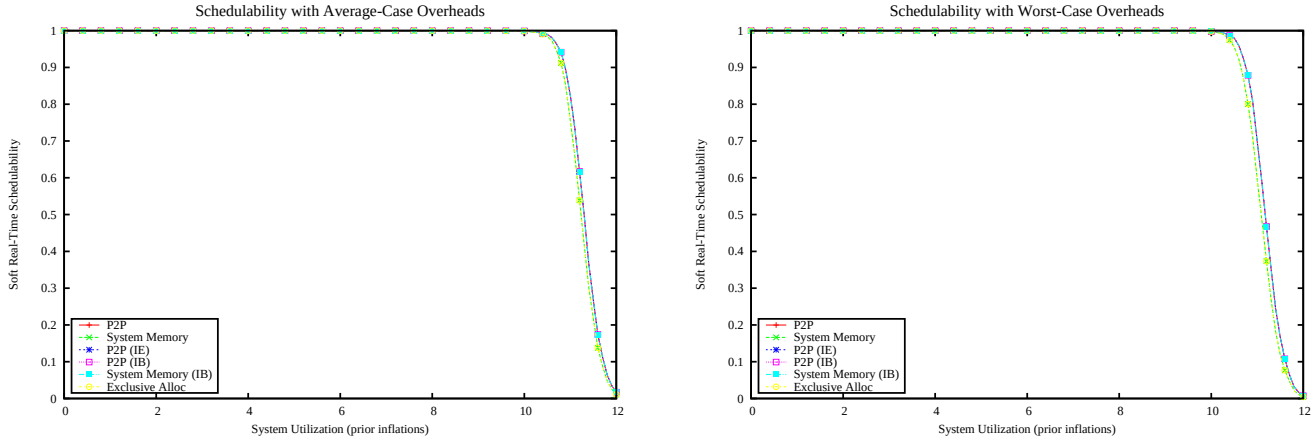

Figure 6928: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

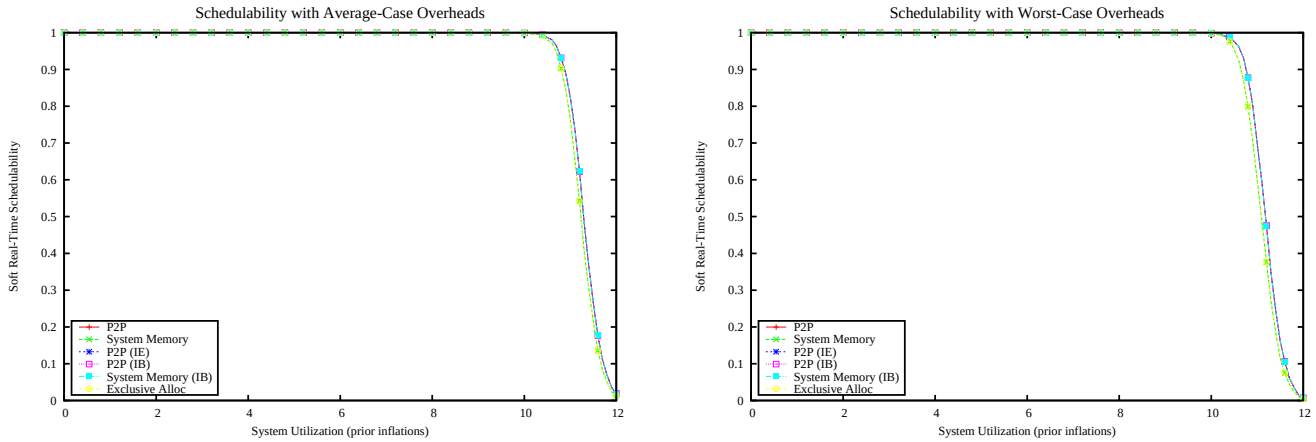

Figure 6929: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

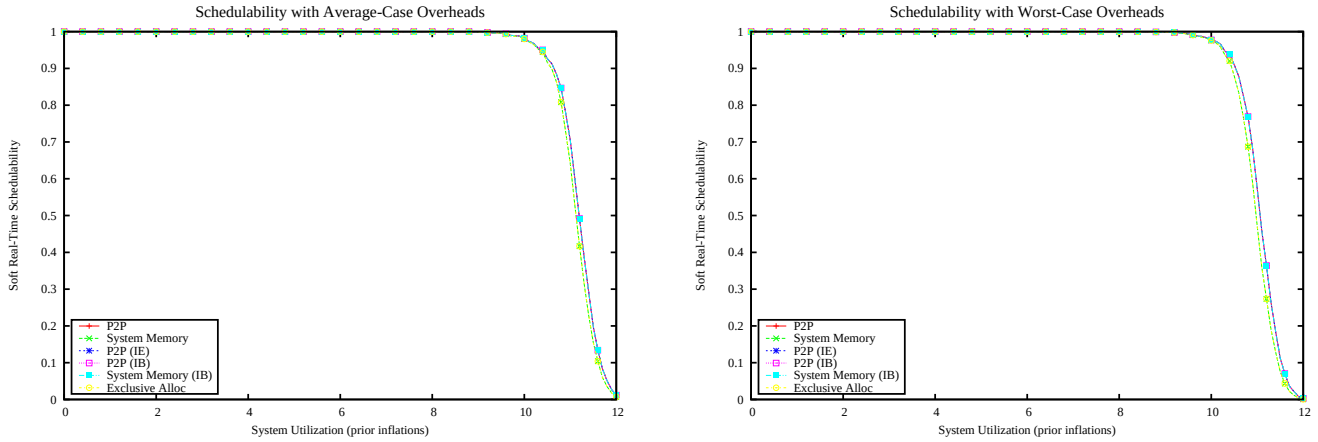

Figure 6930: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

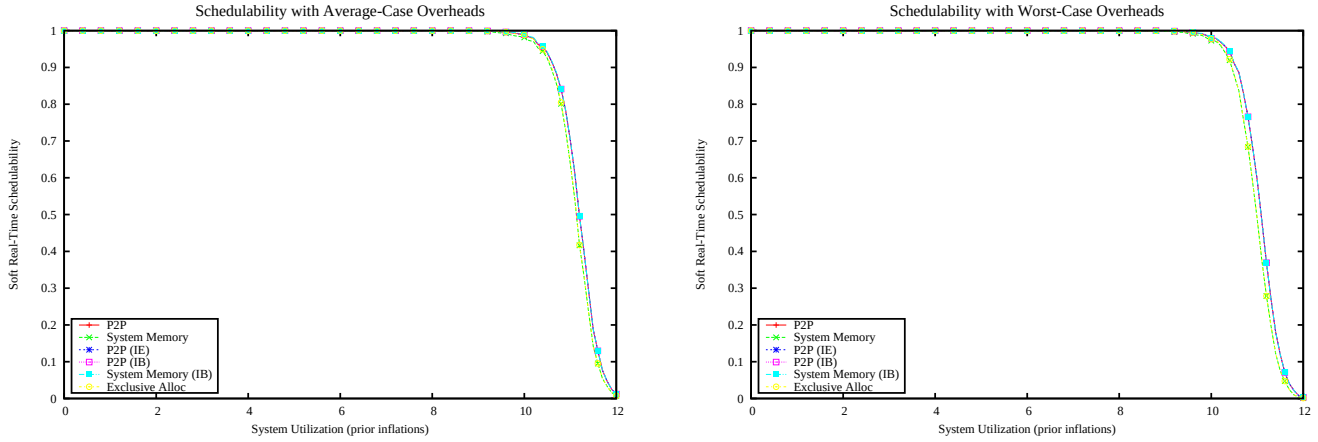

Figure 6931: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

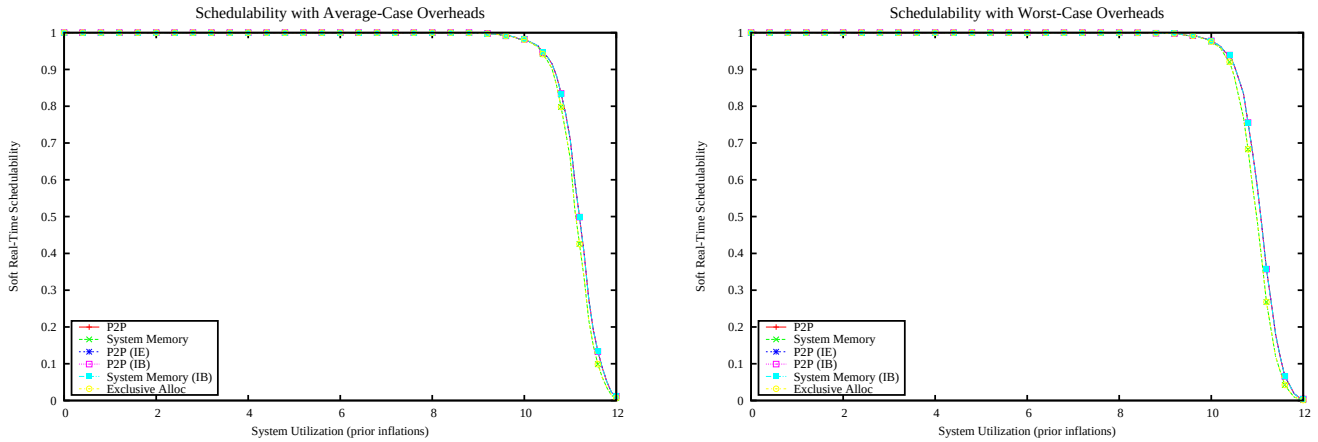

Figure 6932: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

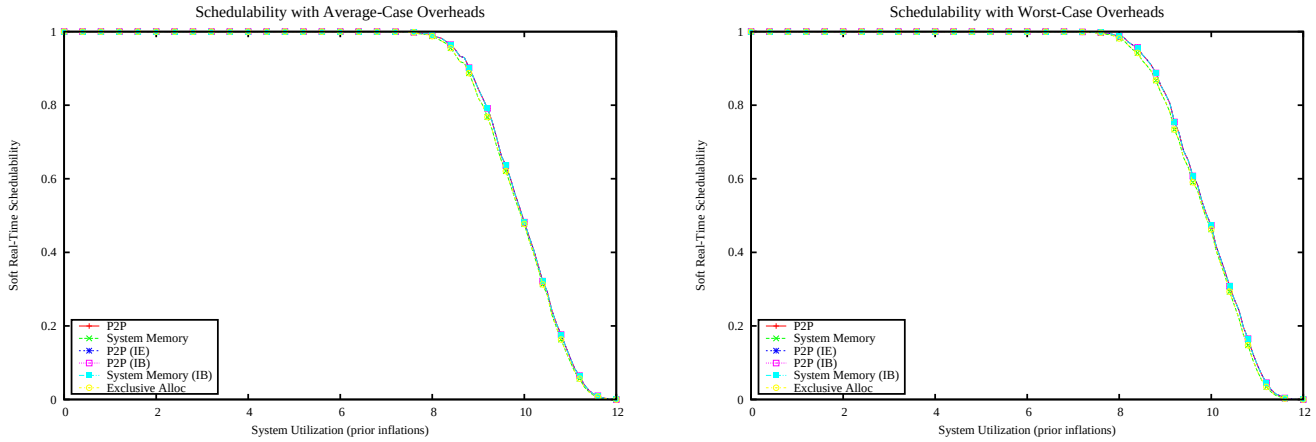

Figure 6933: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

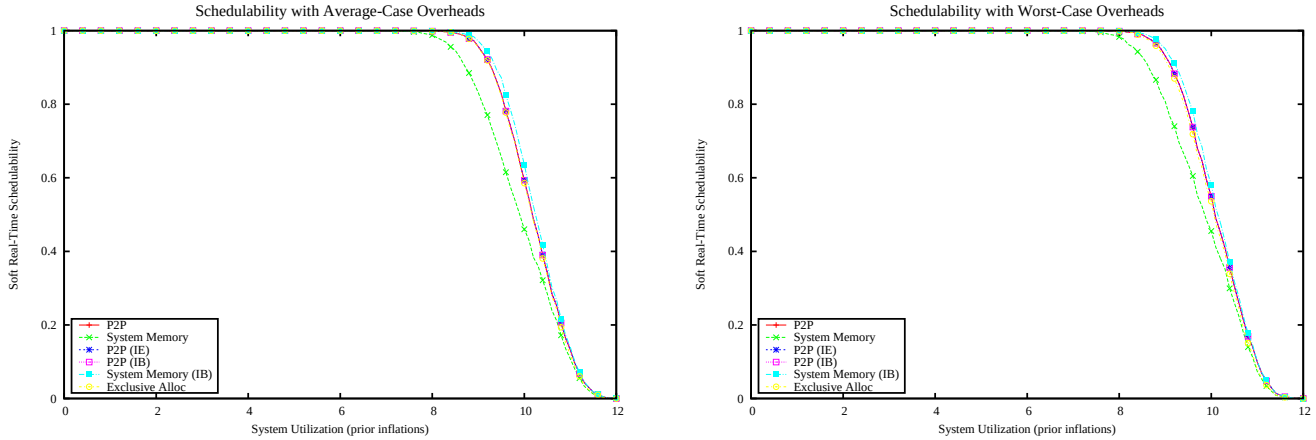

Figure 6934: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

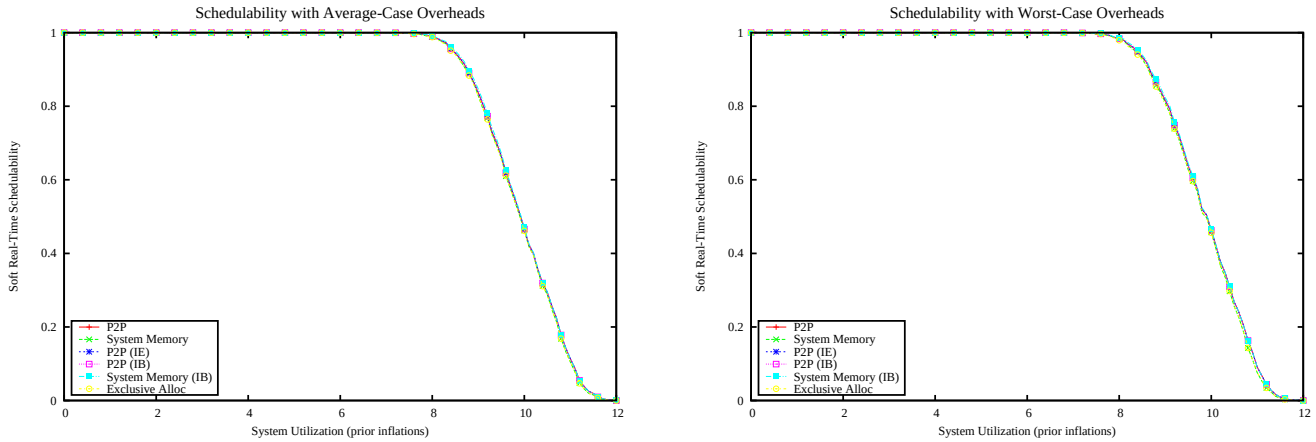

Figure 6935: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

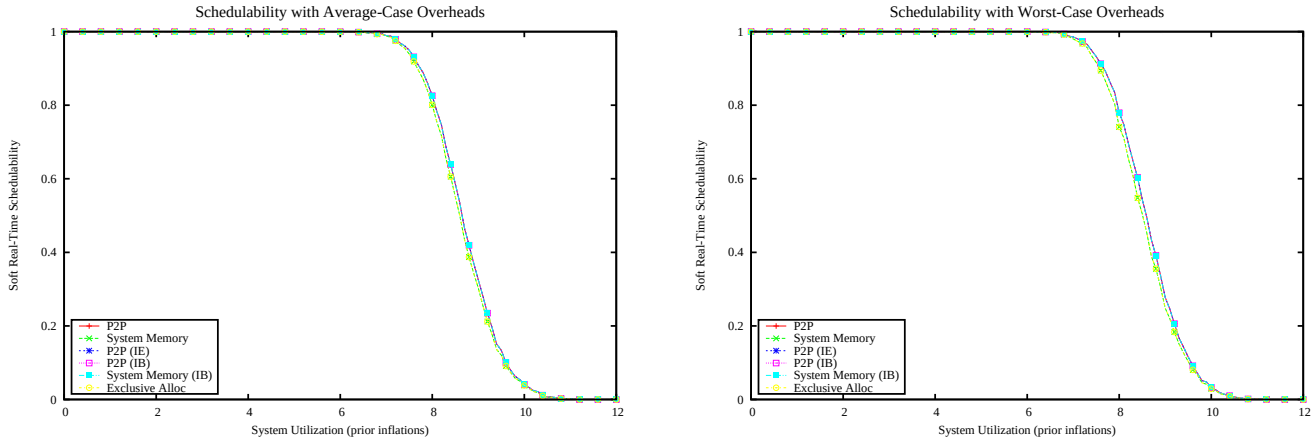

Figure 6936: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

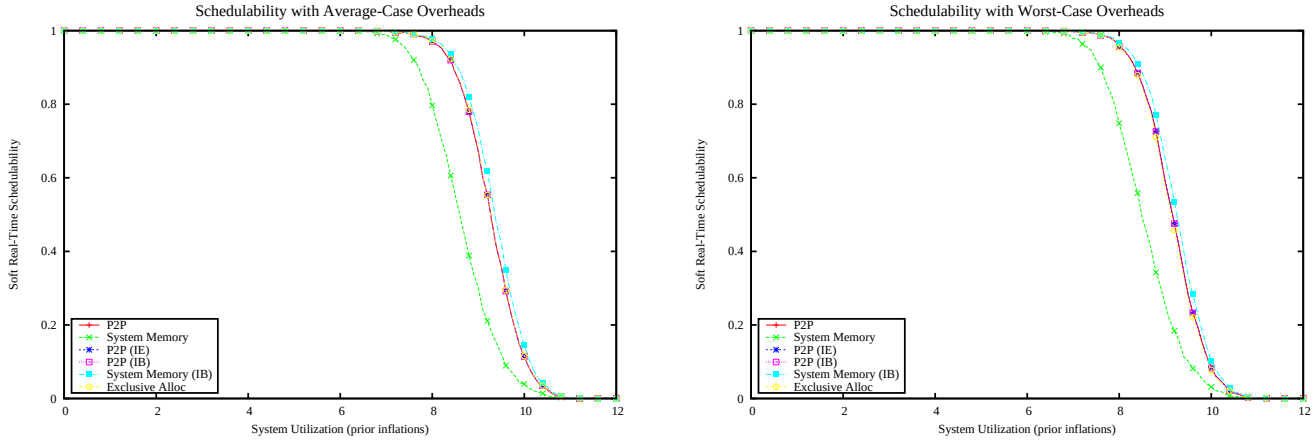

Figure 6937: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

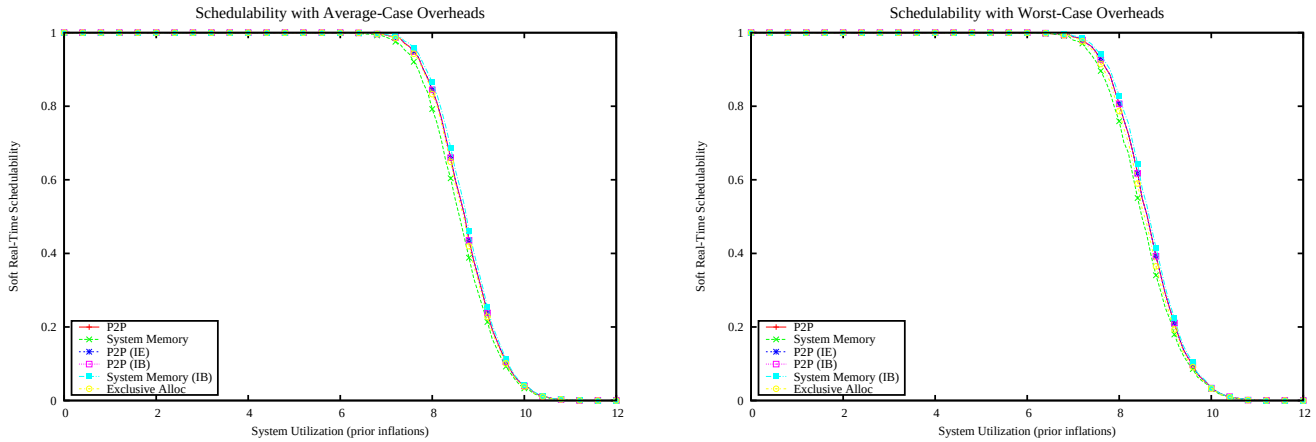

Figure 6938: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

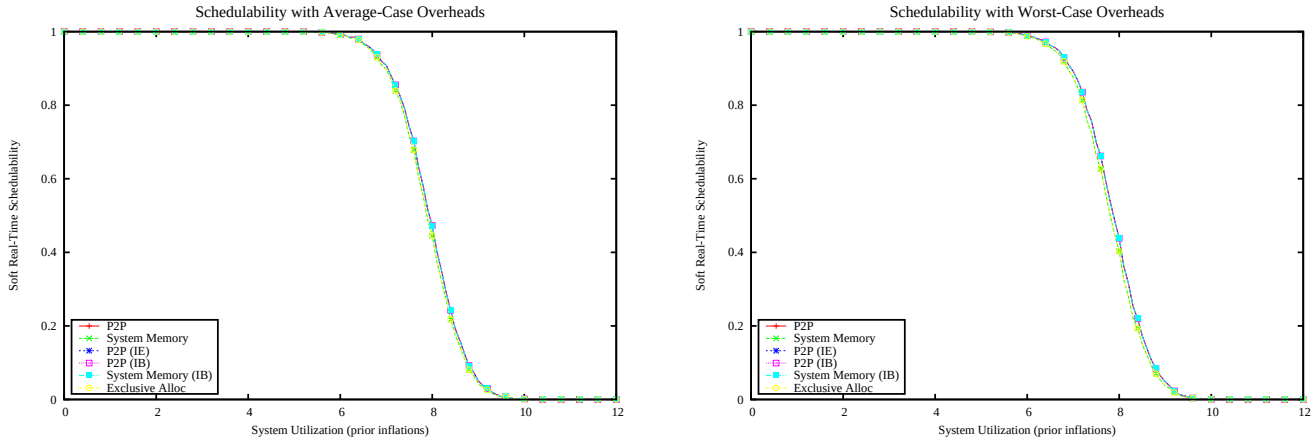

Figure 6939: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

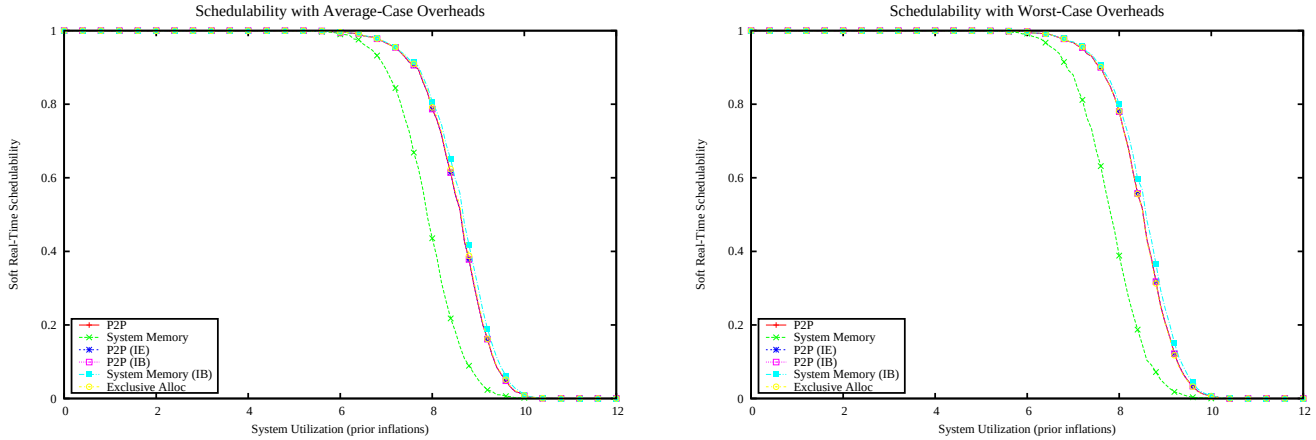

Figure 6940: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

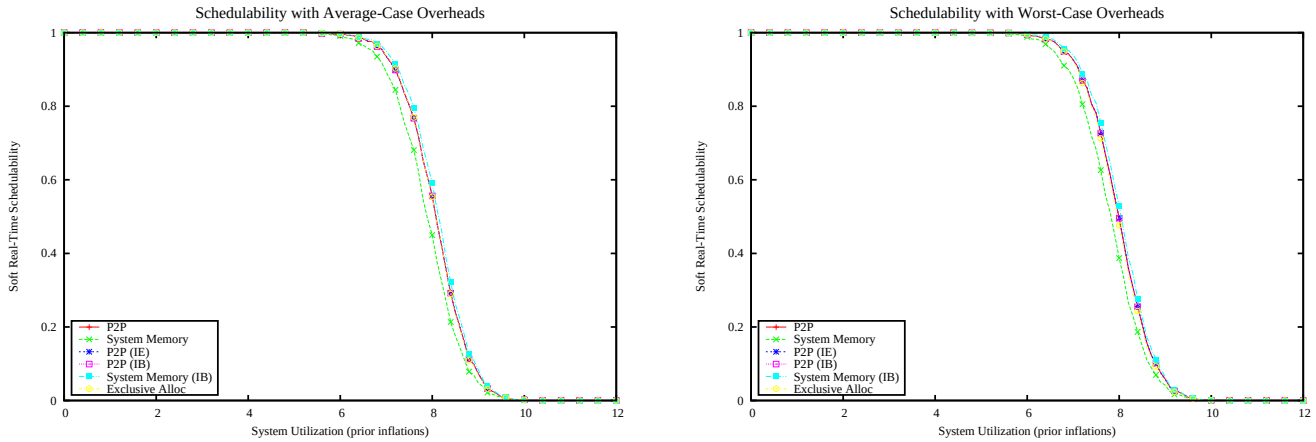

Figure 6941: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

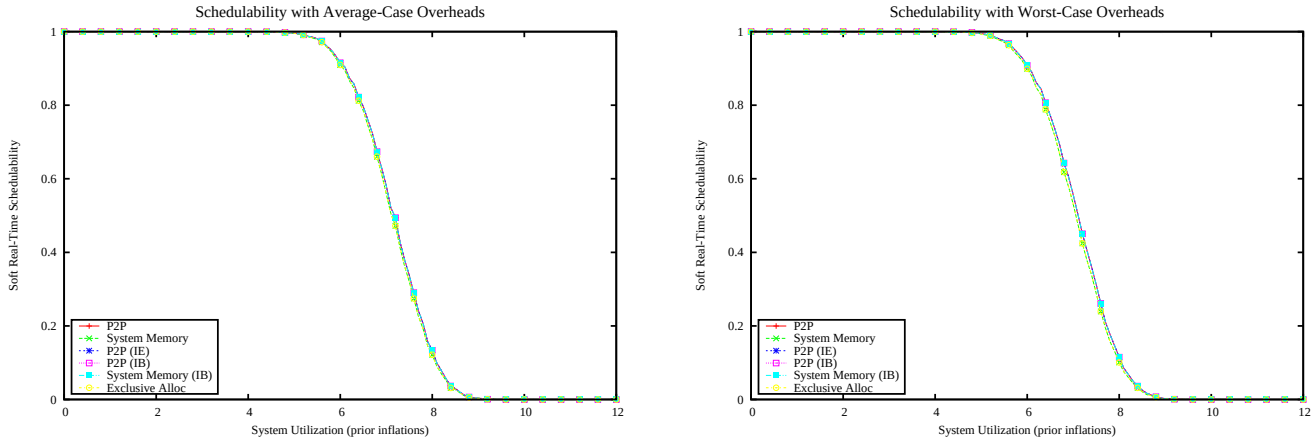

Figure 6942: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

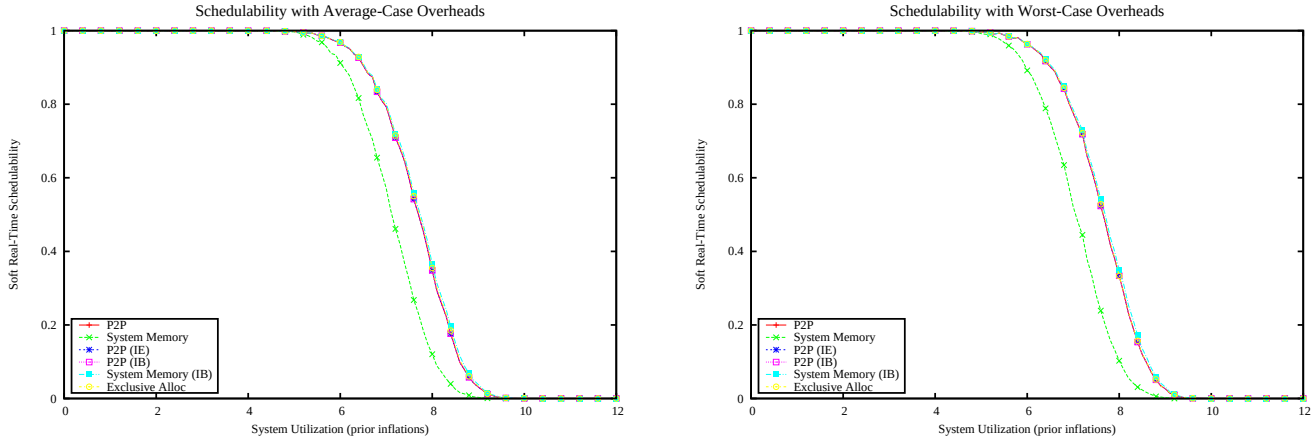

Figure 6943: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

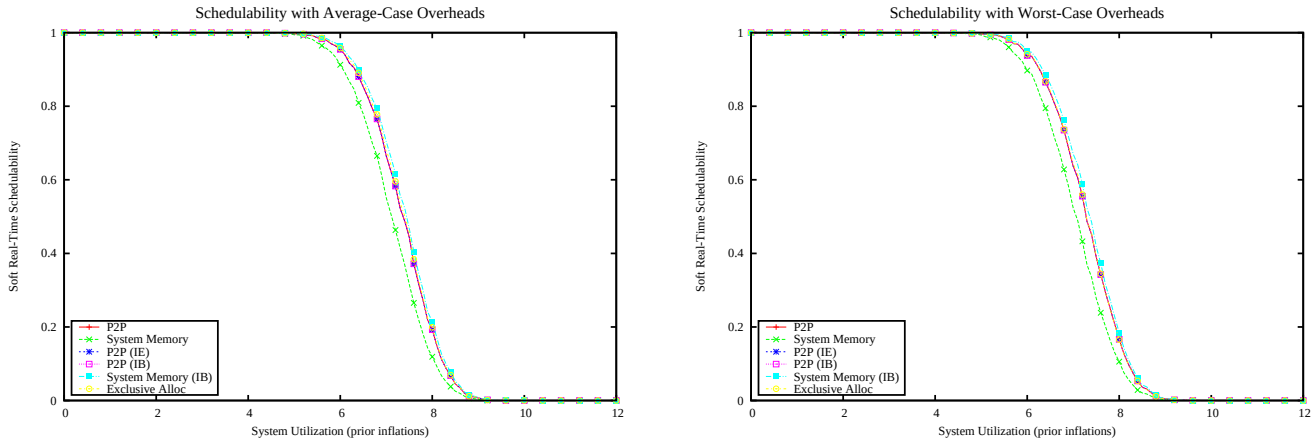

Figure 6944: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

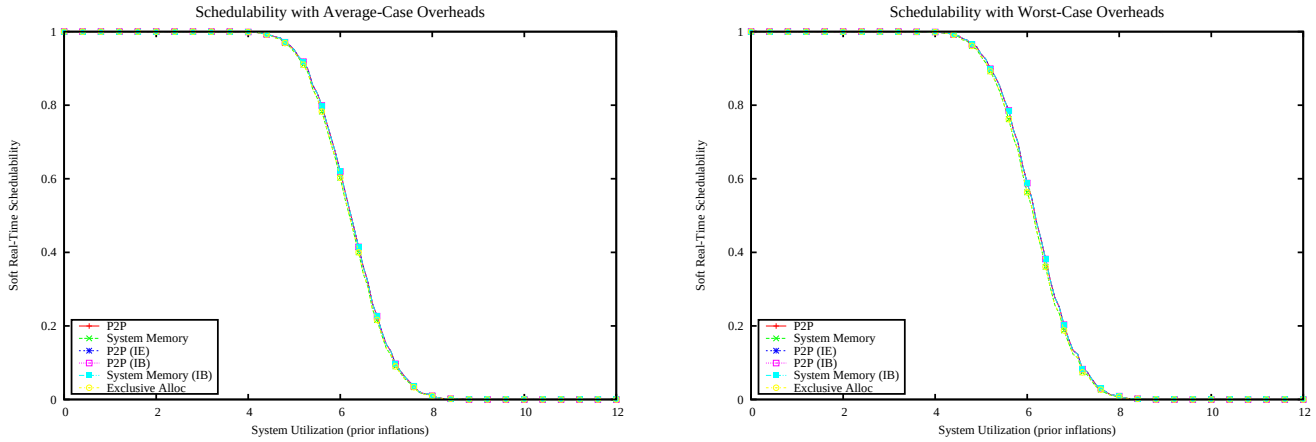

Figure 6945: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

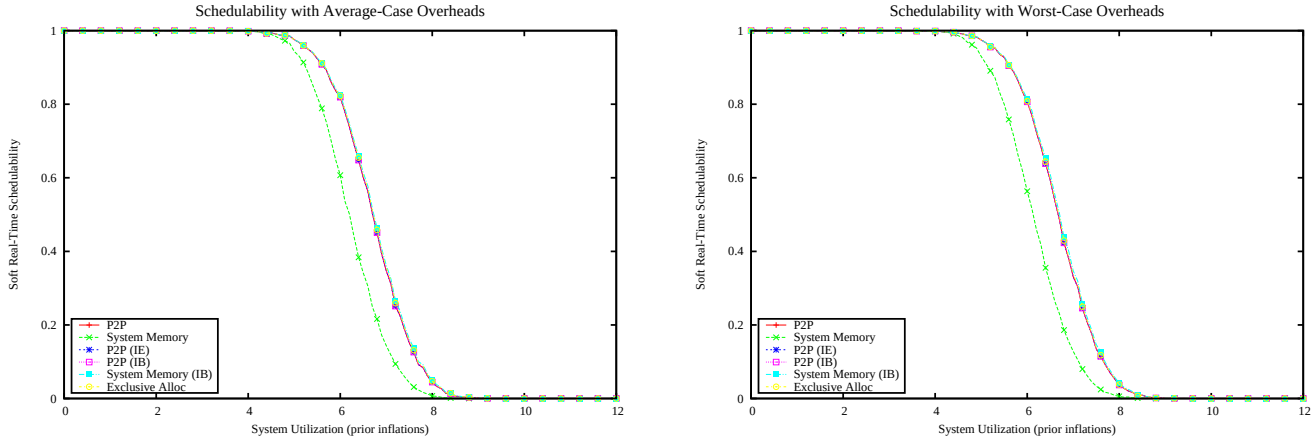

Figure 6946: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

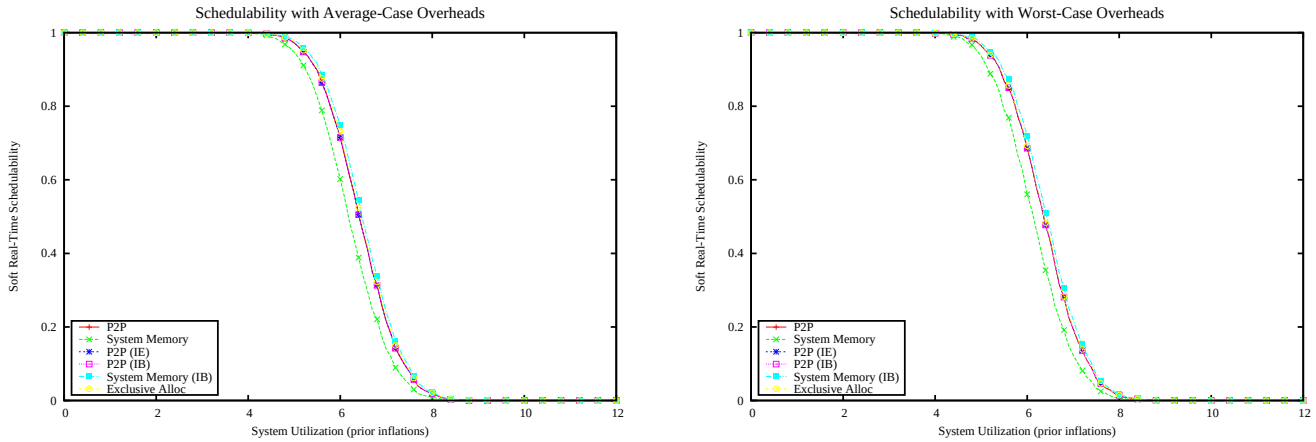

Figure 6947: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

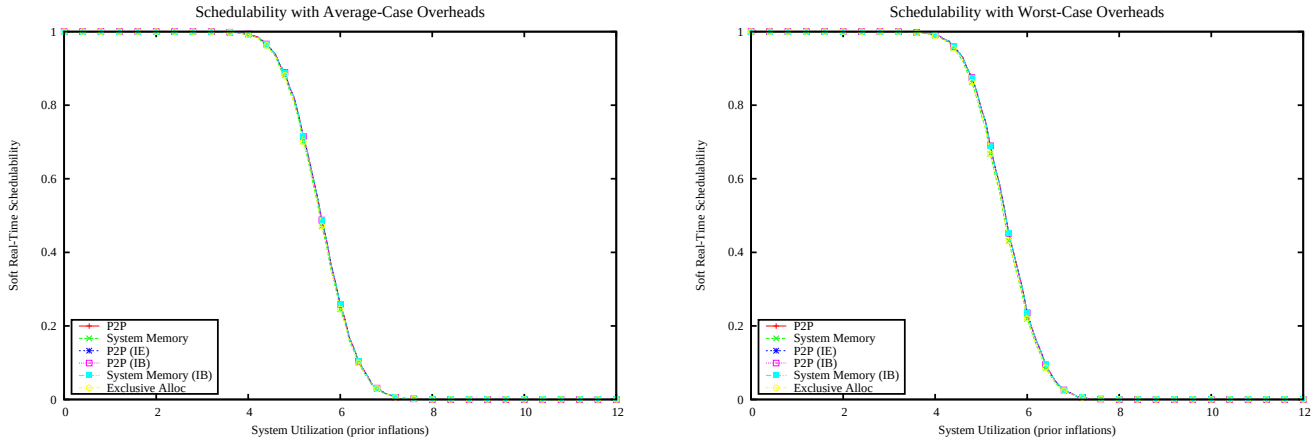

Figure 6948: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

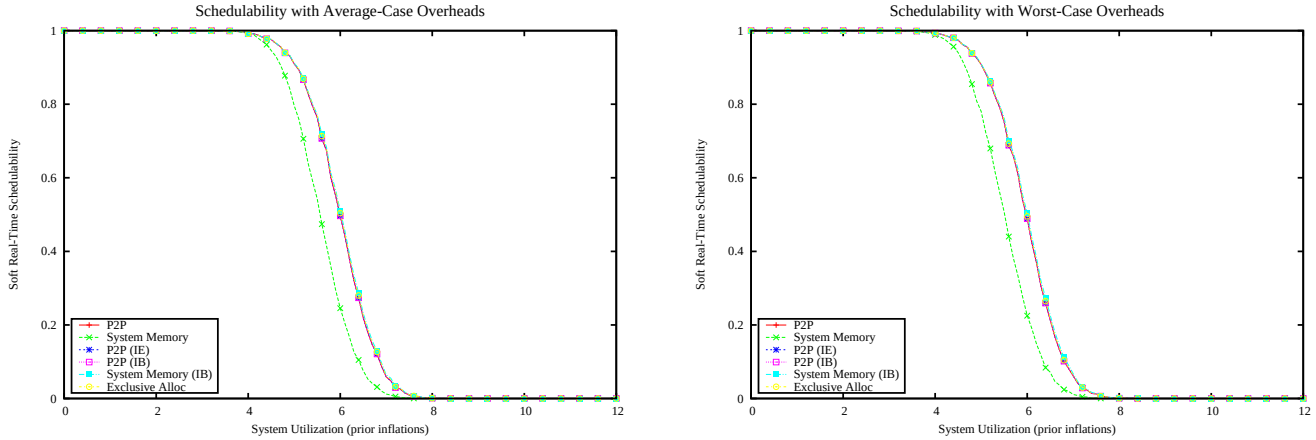

Figure 6949: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

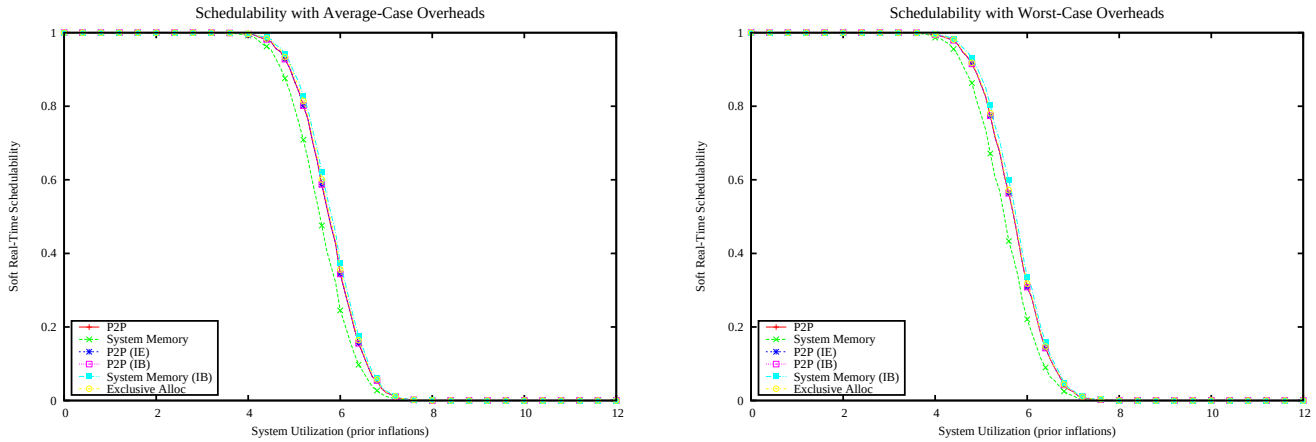

Figure 6950: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

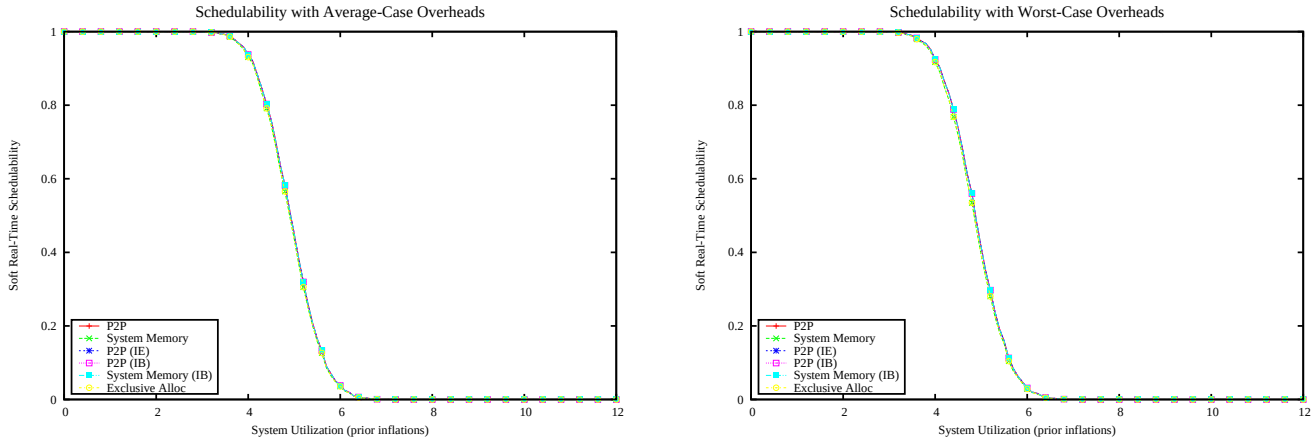

Figure 6951: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

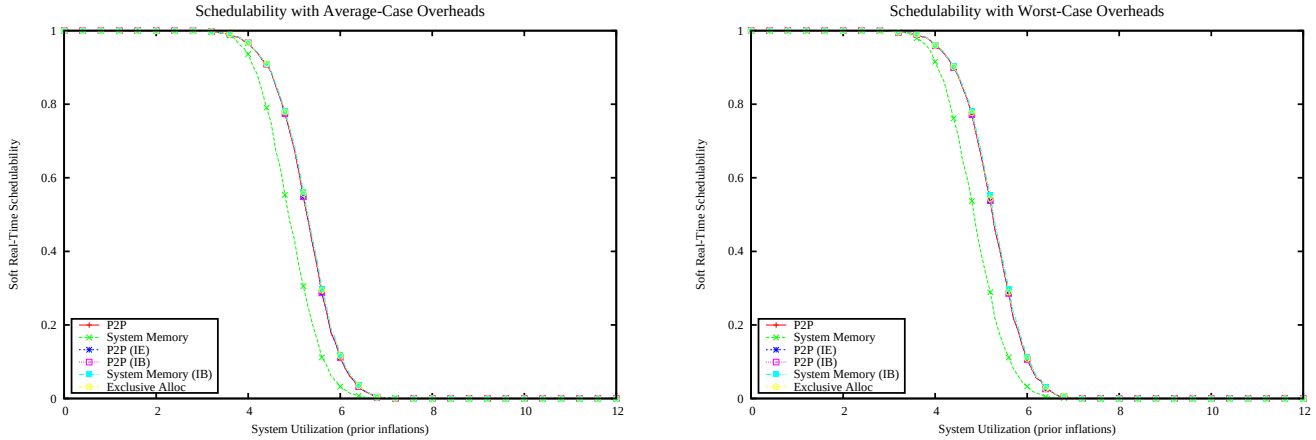

Figure 6952: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

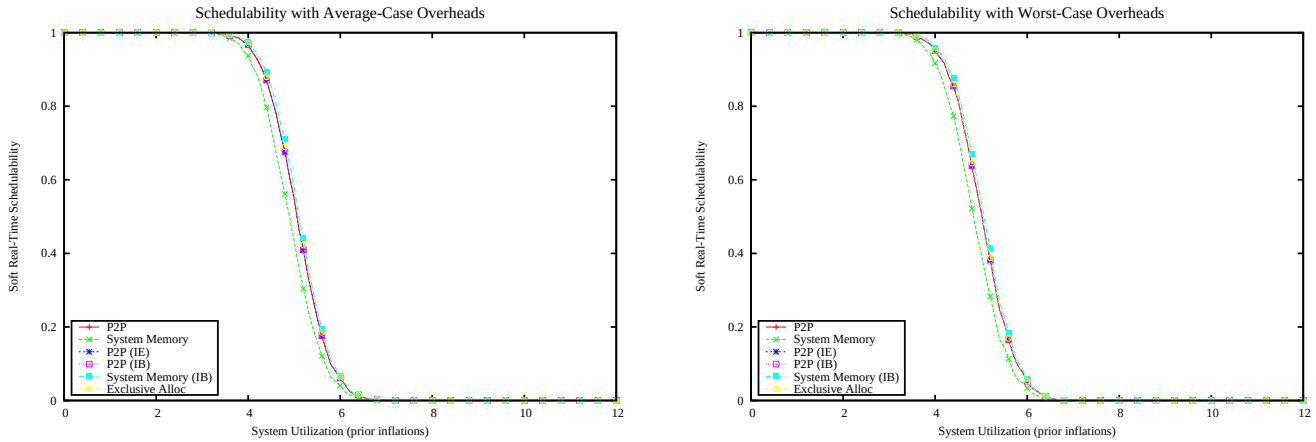

Figure 6953: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

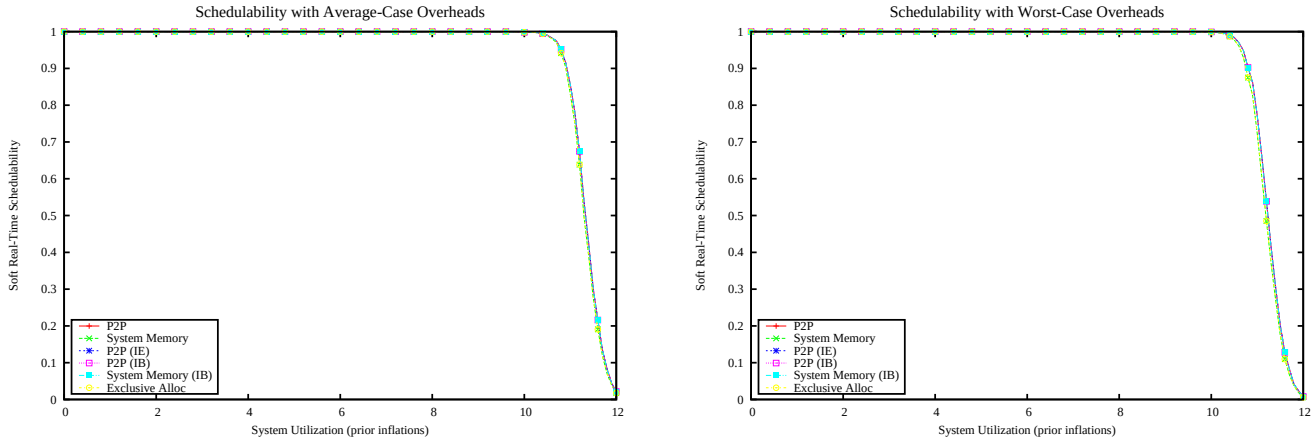

Figure 6954: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

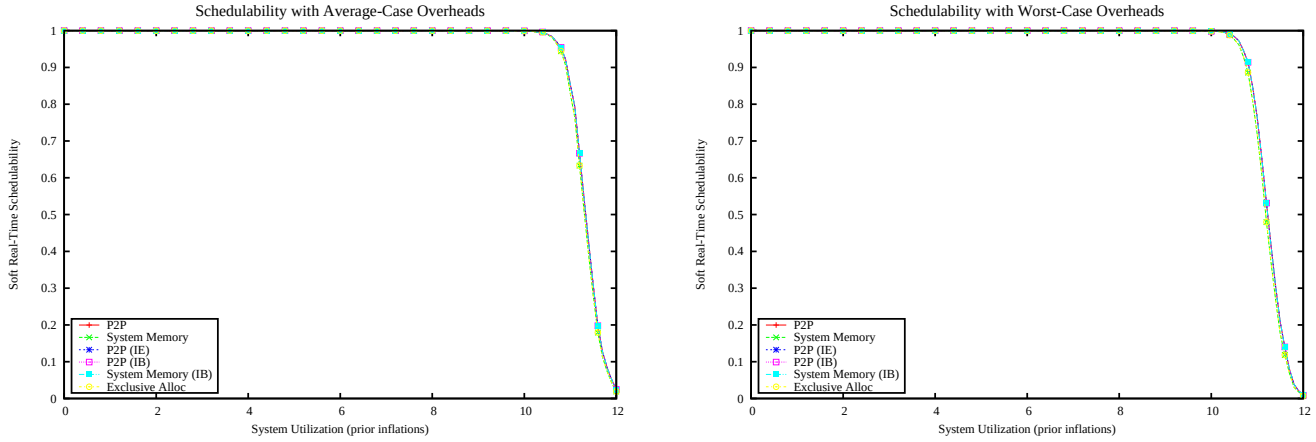

Figure 6955: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

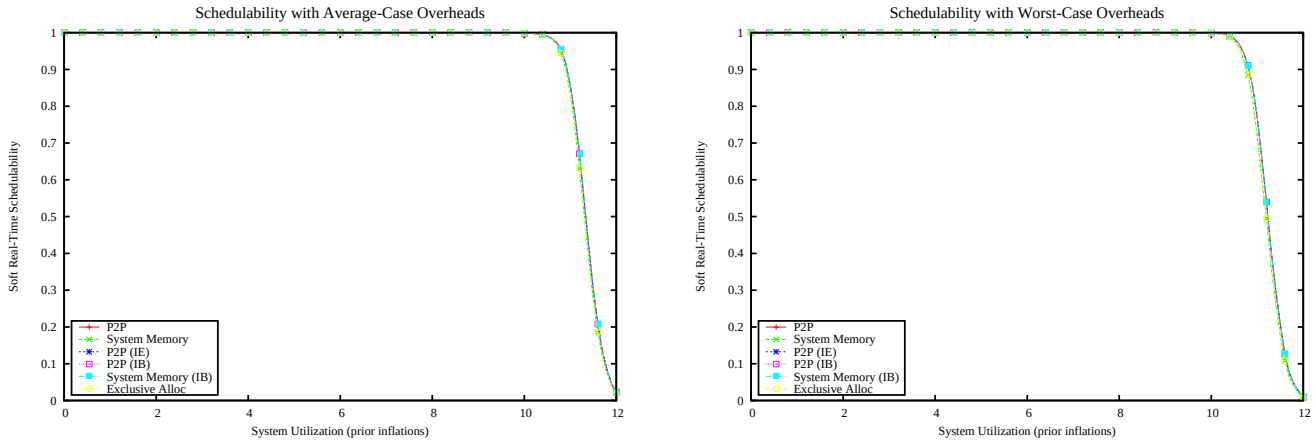

Figure 6956: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

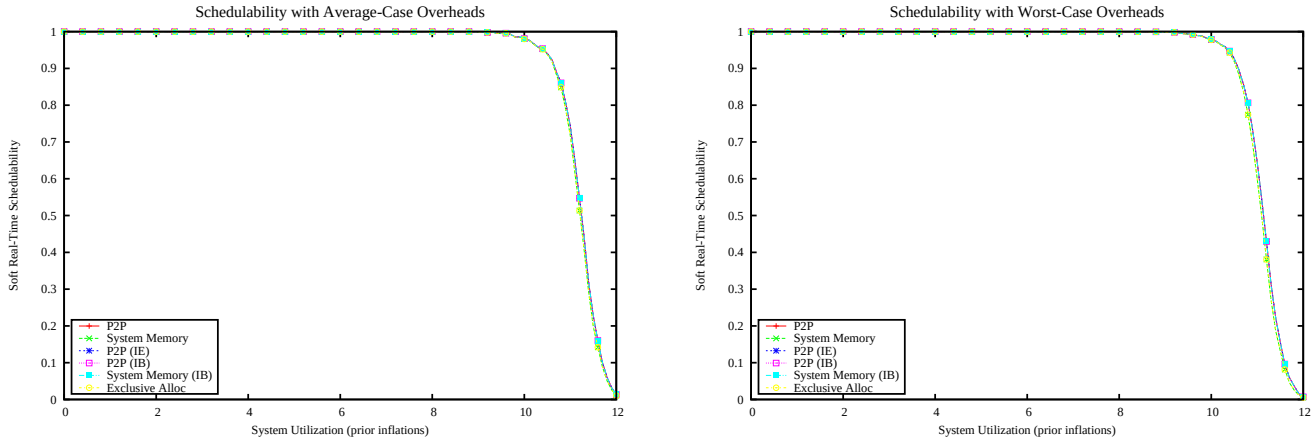

Figure 6957: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

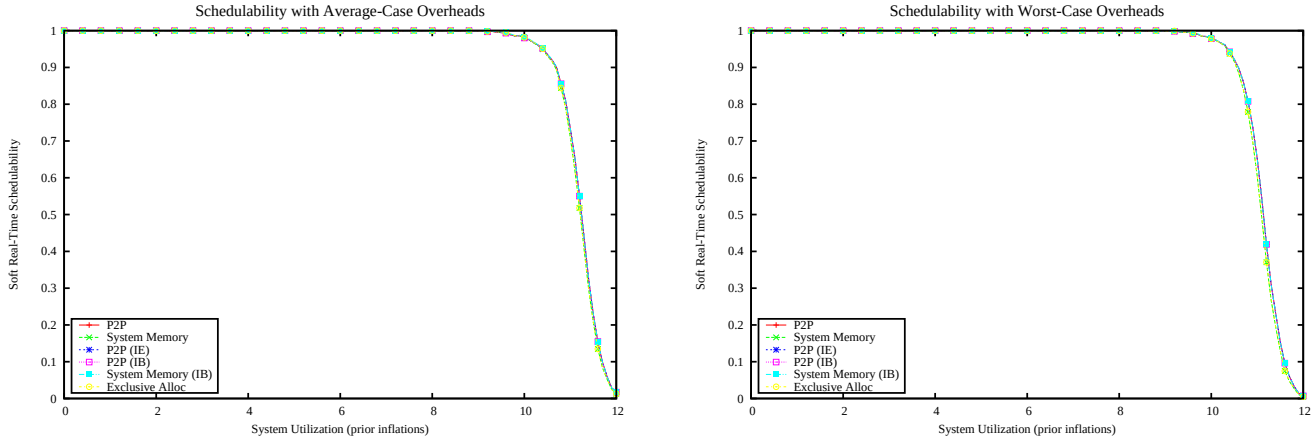

Figure 6958: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

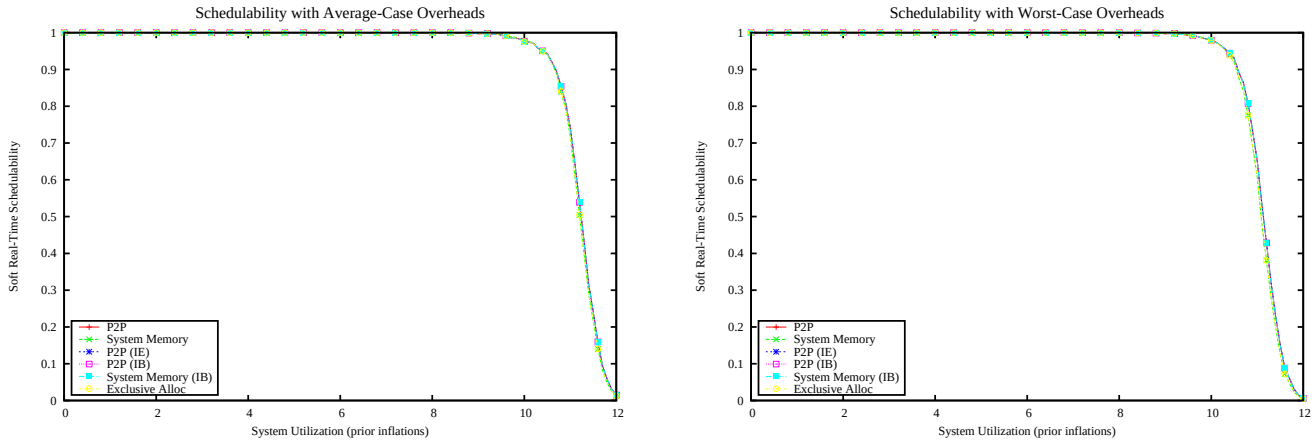

Figure 6959: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

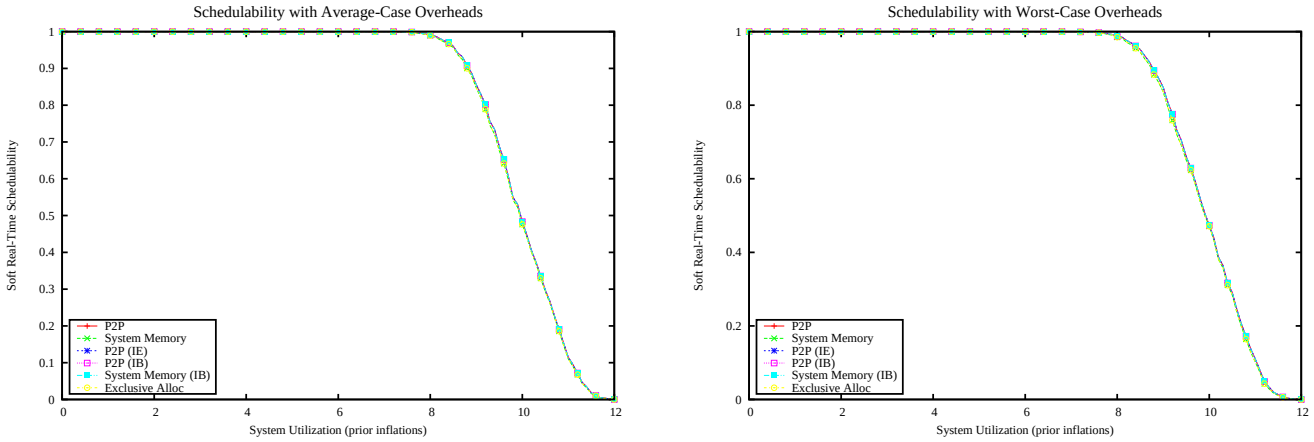

Figure 6960: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

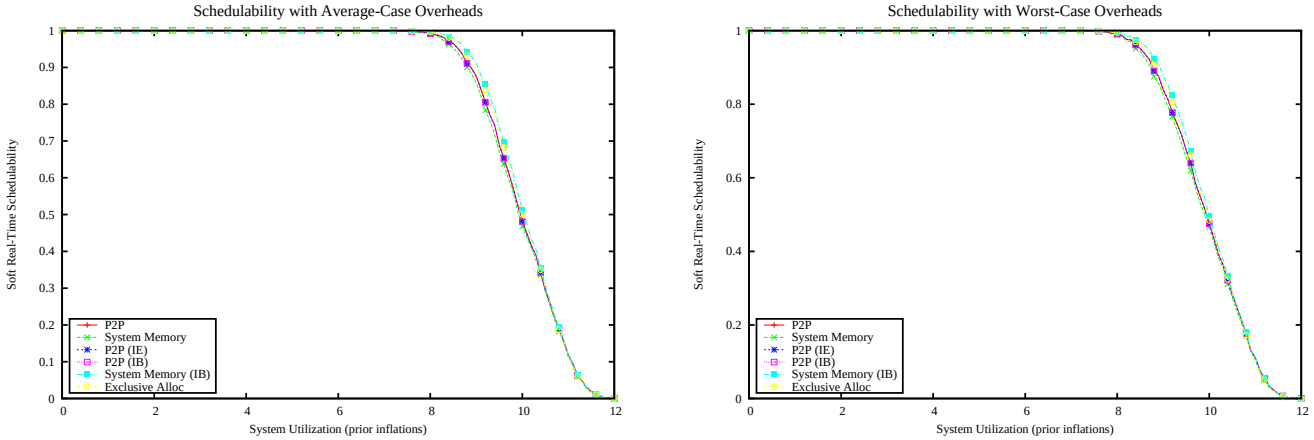

Figure 6961: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

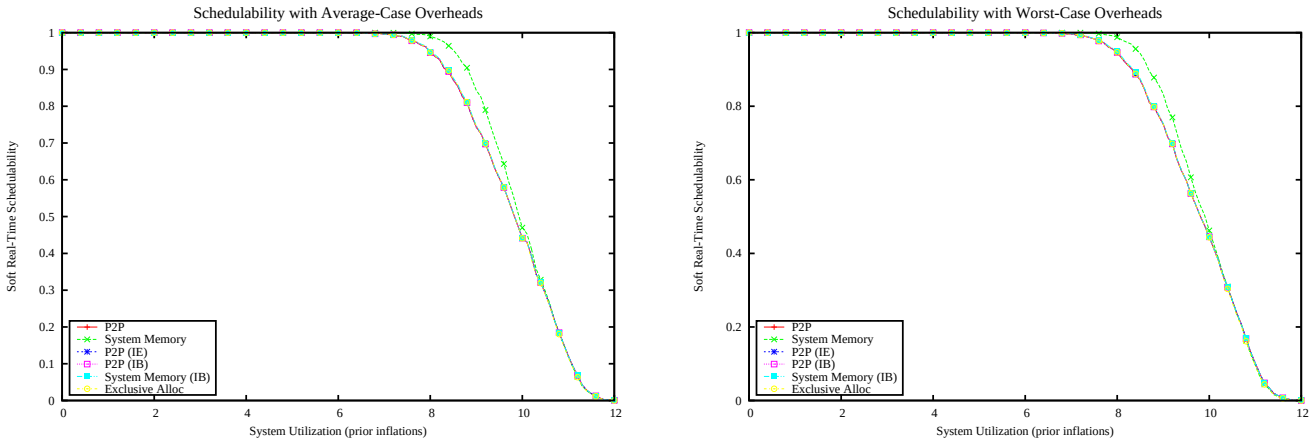

Figure 6962: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

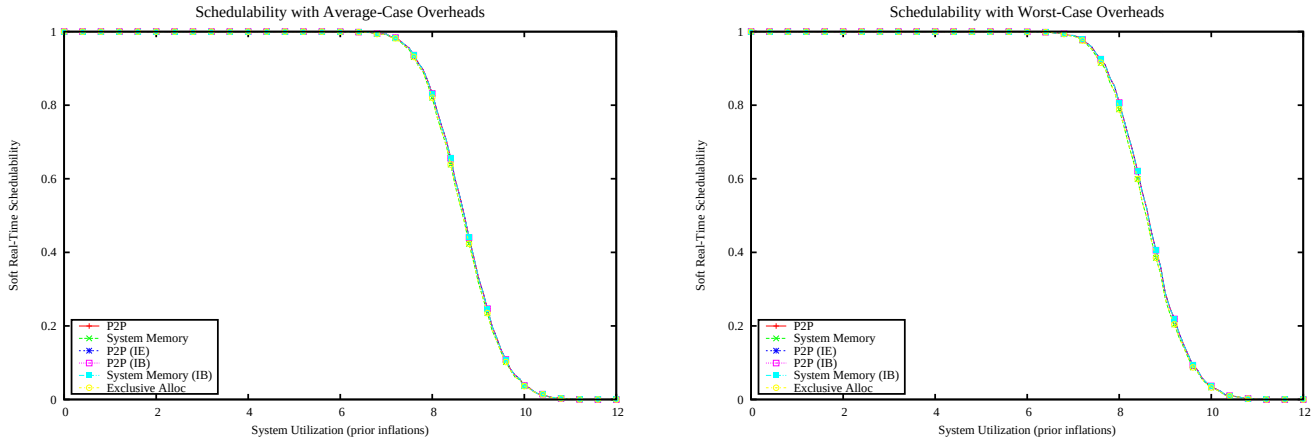

Figure 6963: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

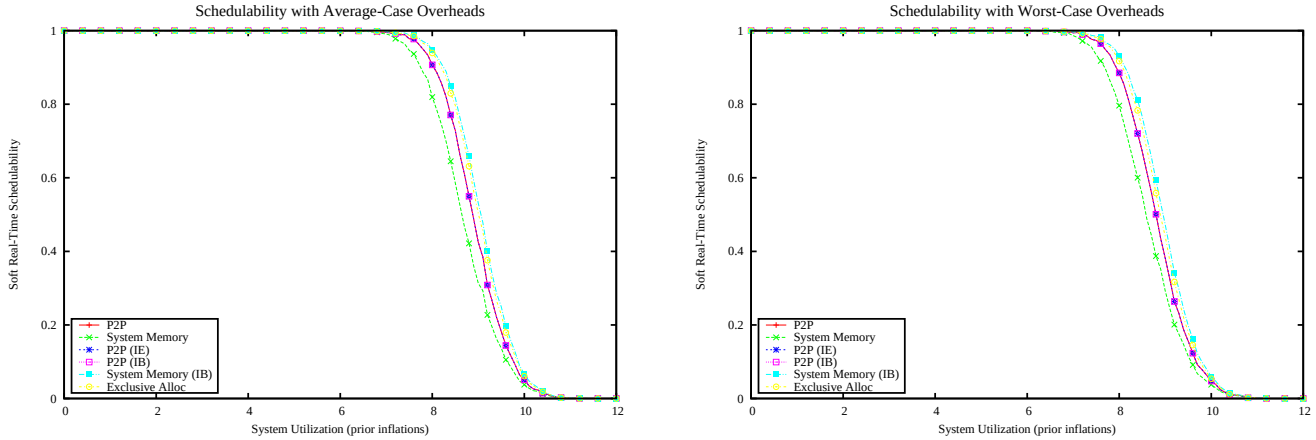

Figure 6964: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

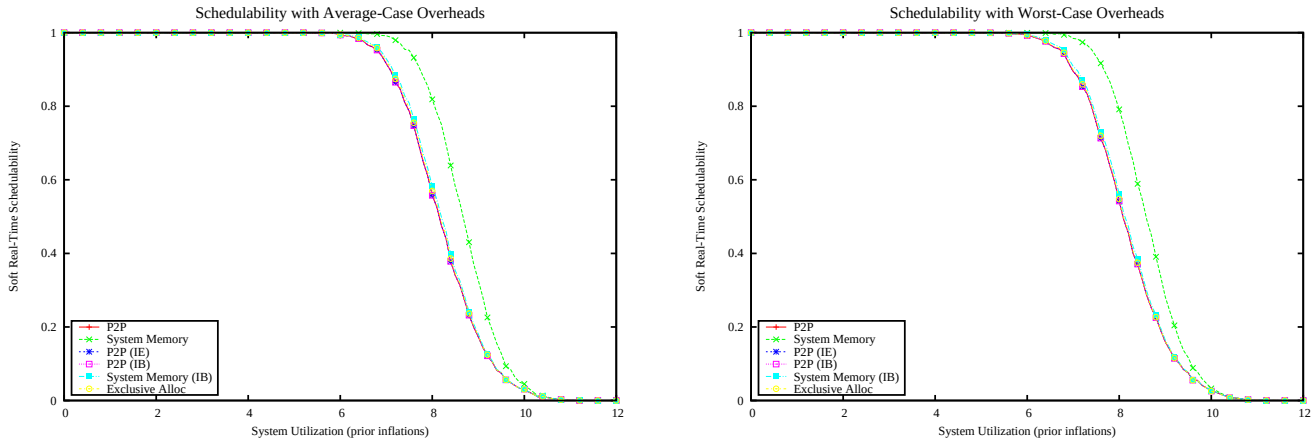

Figure 6965: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

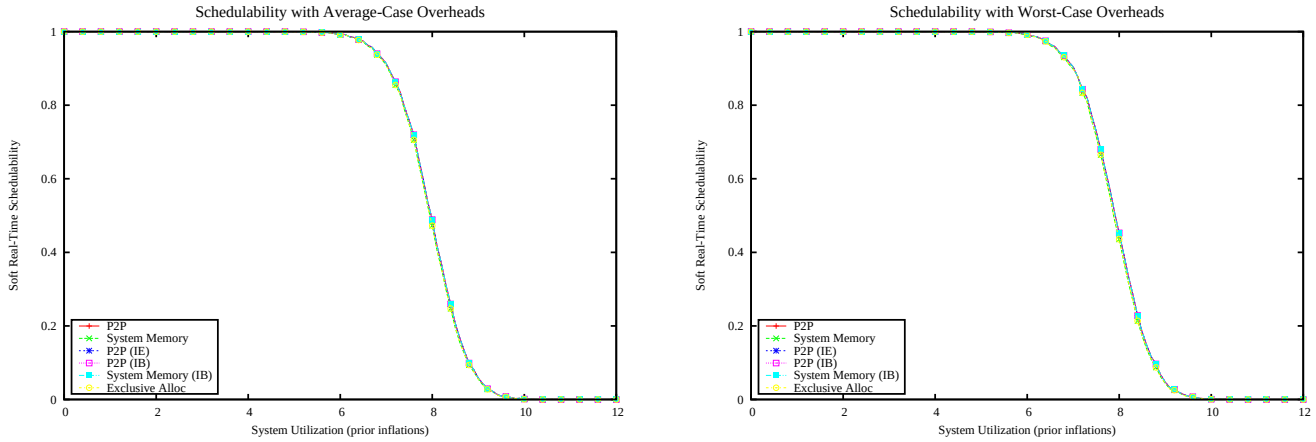

Figure 6966: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

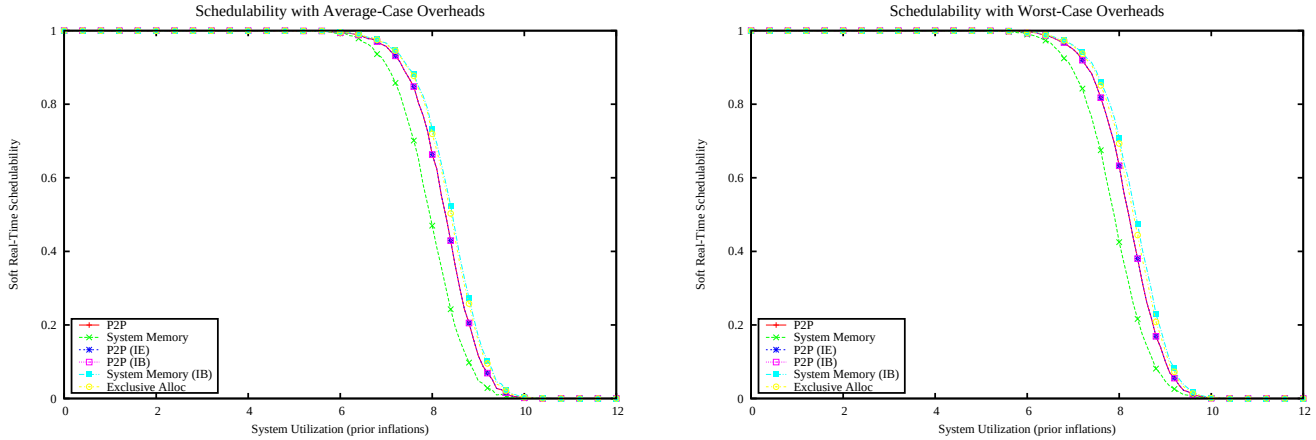

Figure 6967: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

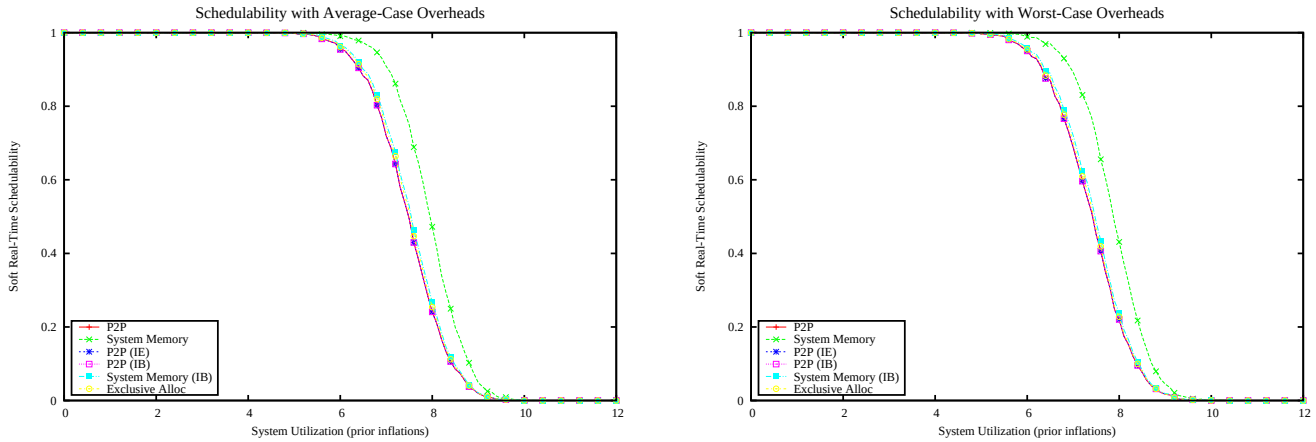

Figure 6968: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

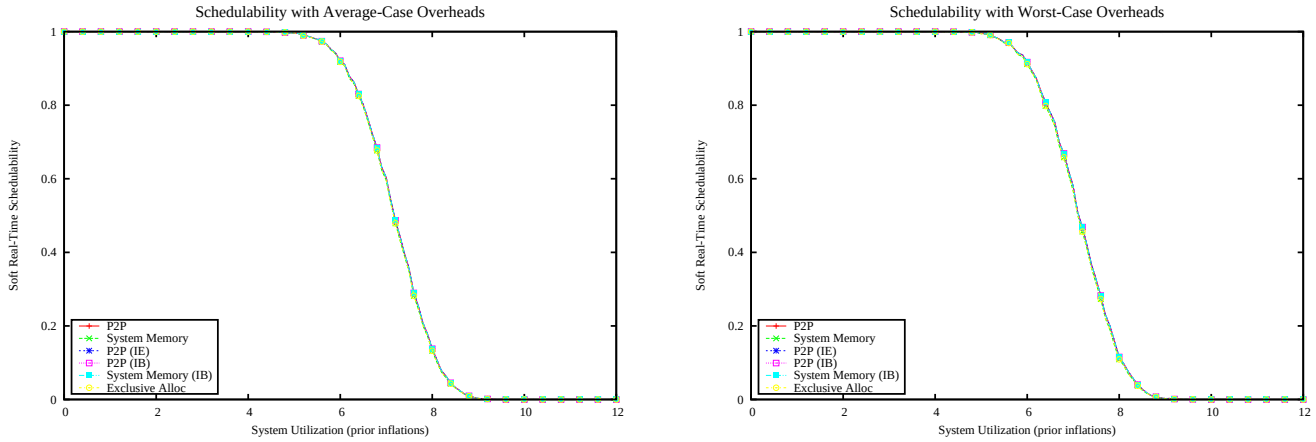

Figure 6969: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

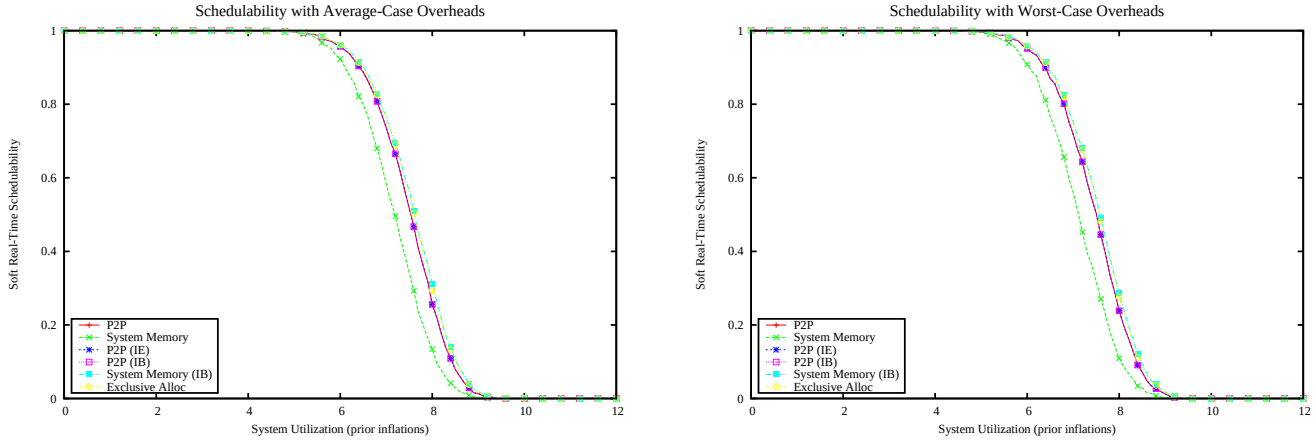

Figure 6970: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

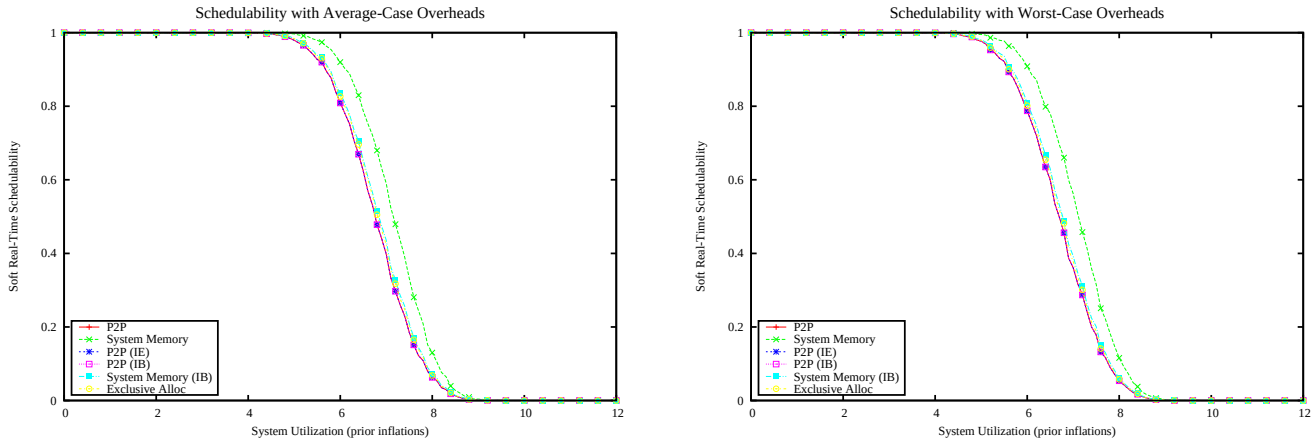

Figure 6971: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

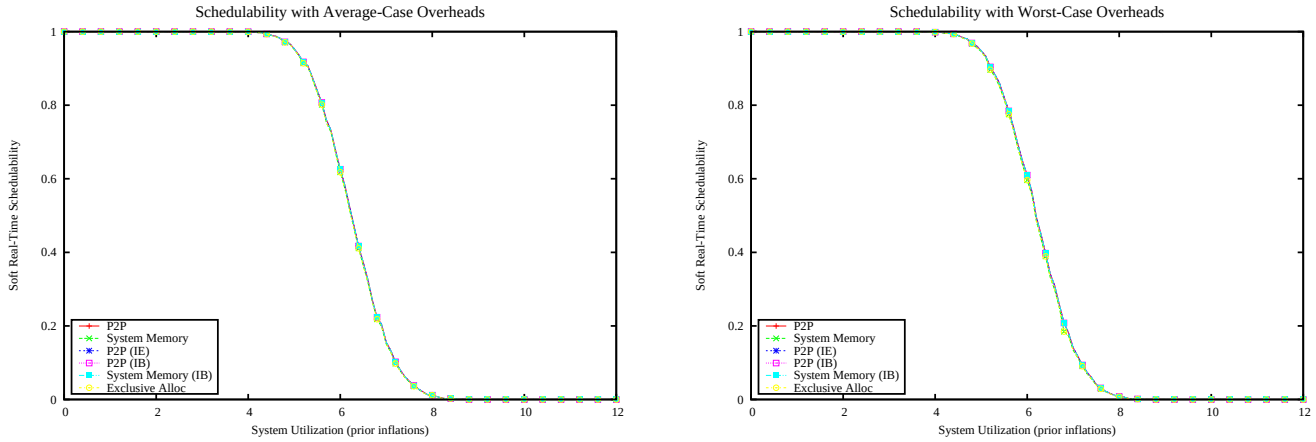

Figure 6972: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

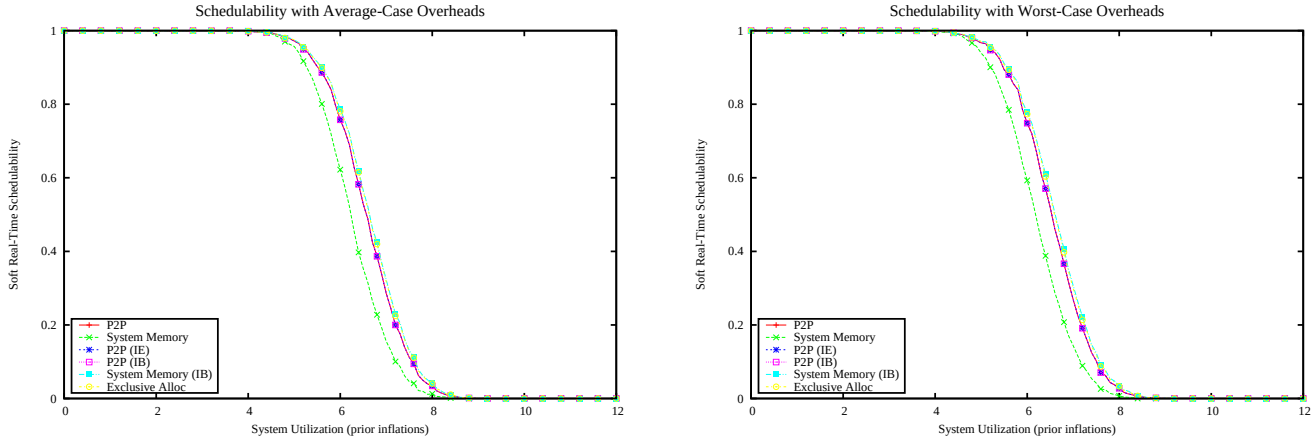

Figure 6973: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

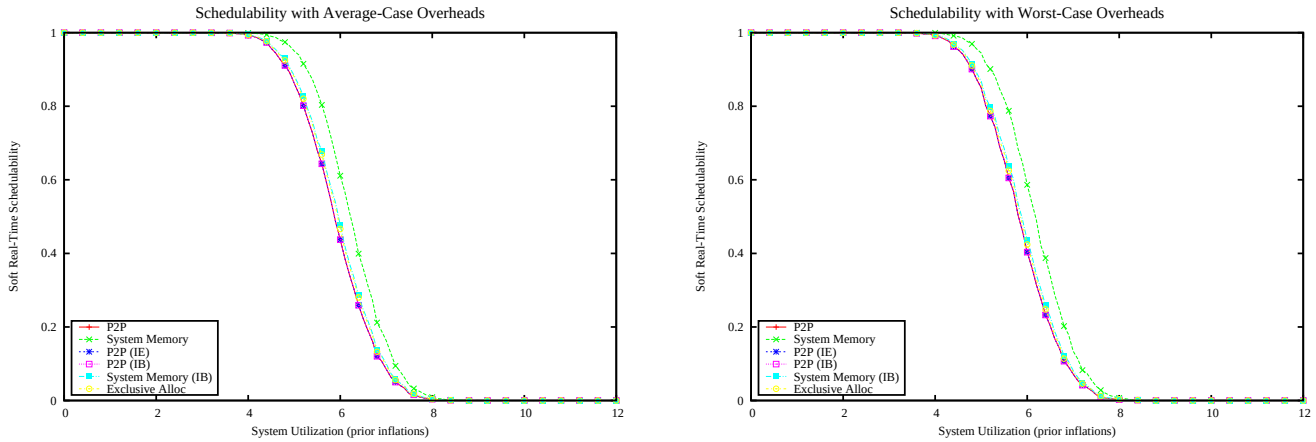

Figure 6974: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

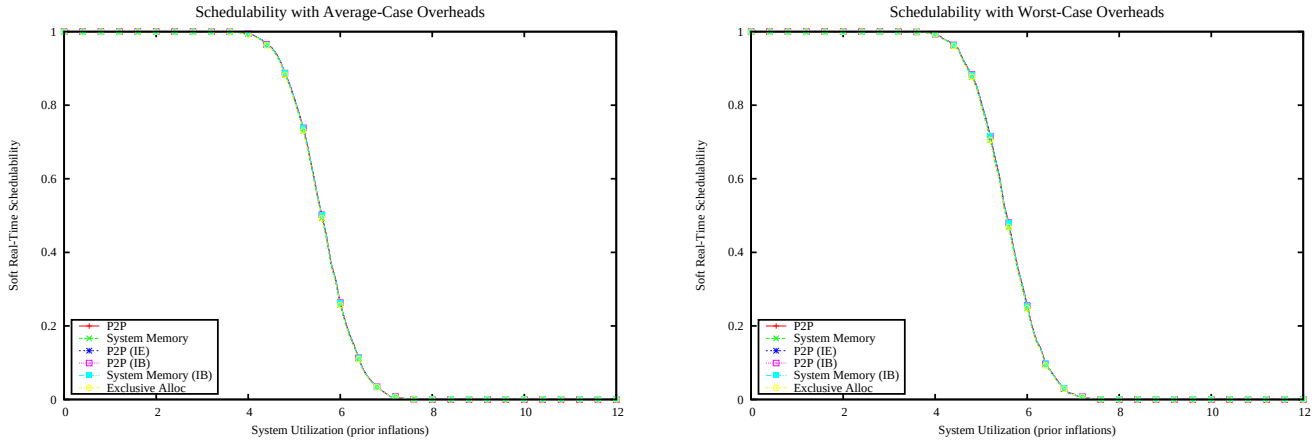

Figure 6975: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

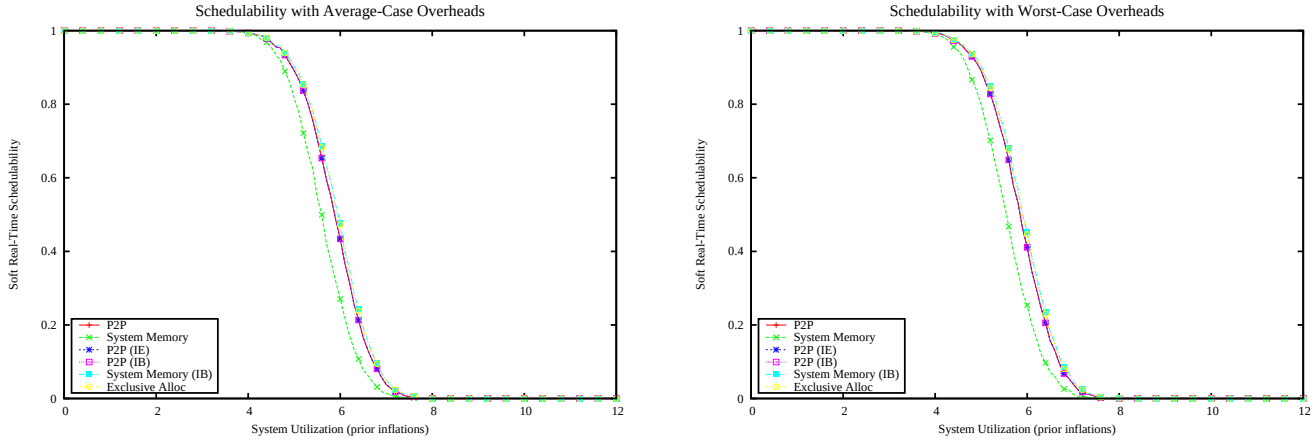

Figure 6976: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

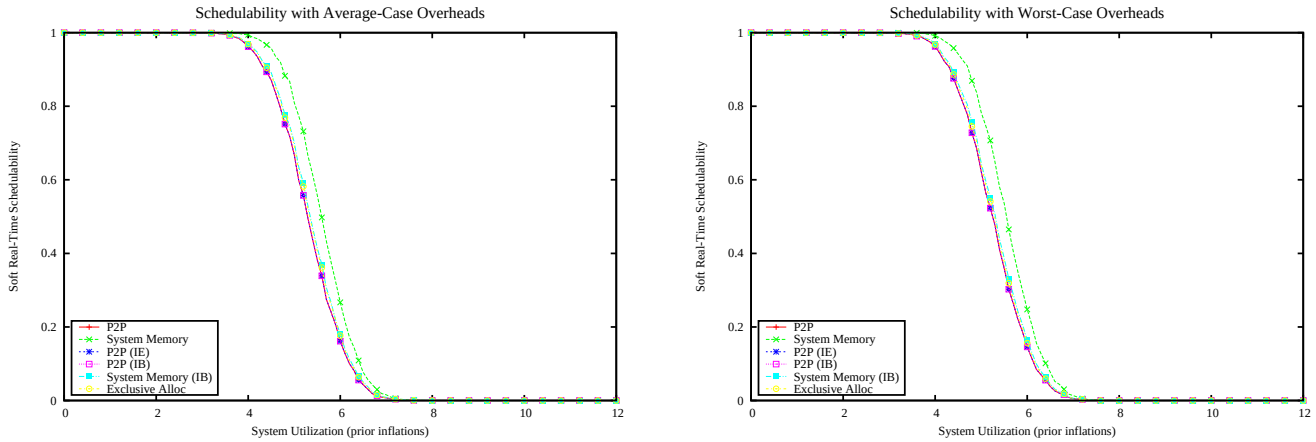

Figure 6977: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

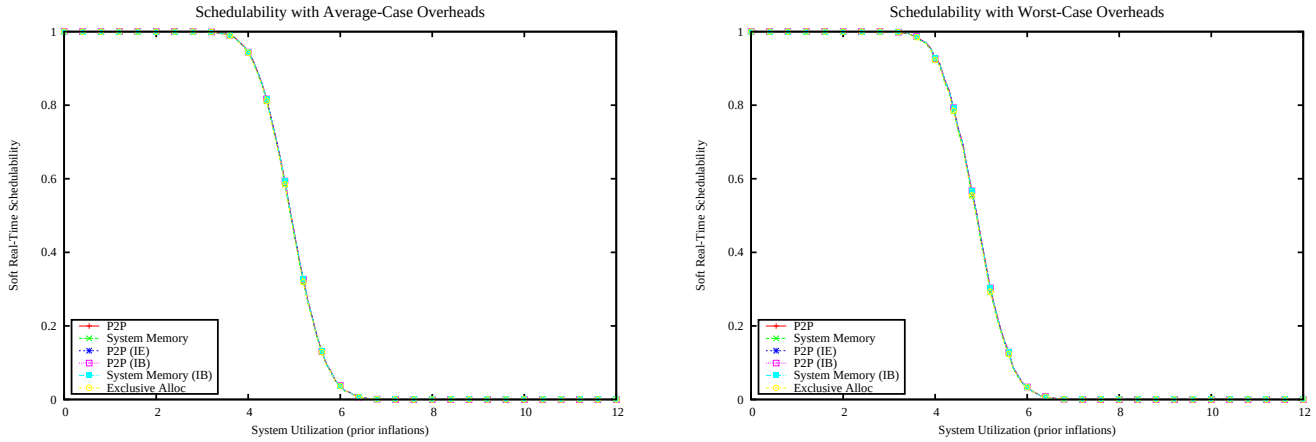

Figure 6978: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

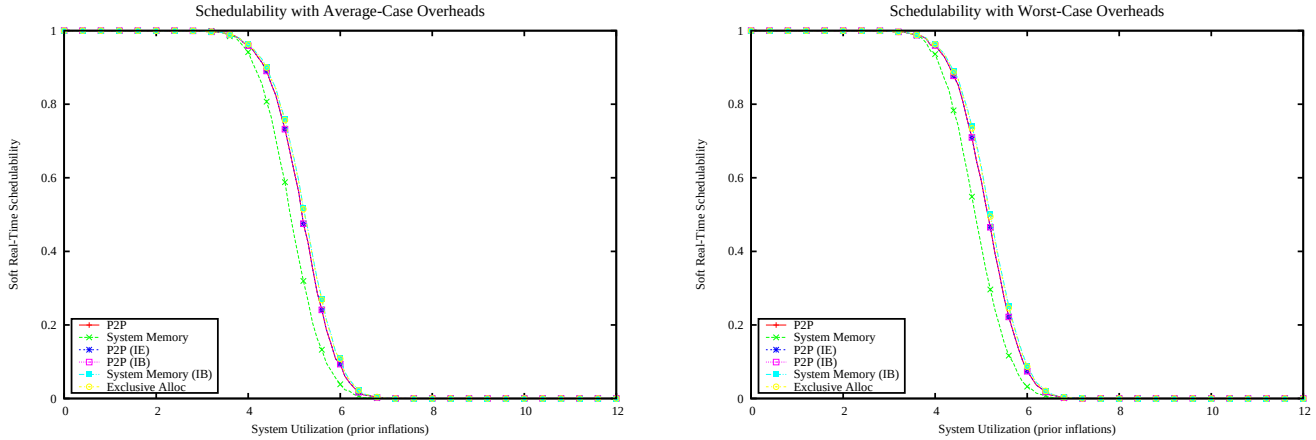

Figure 6979: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

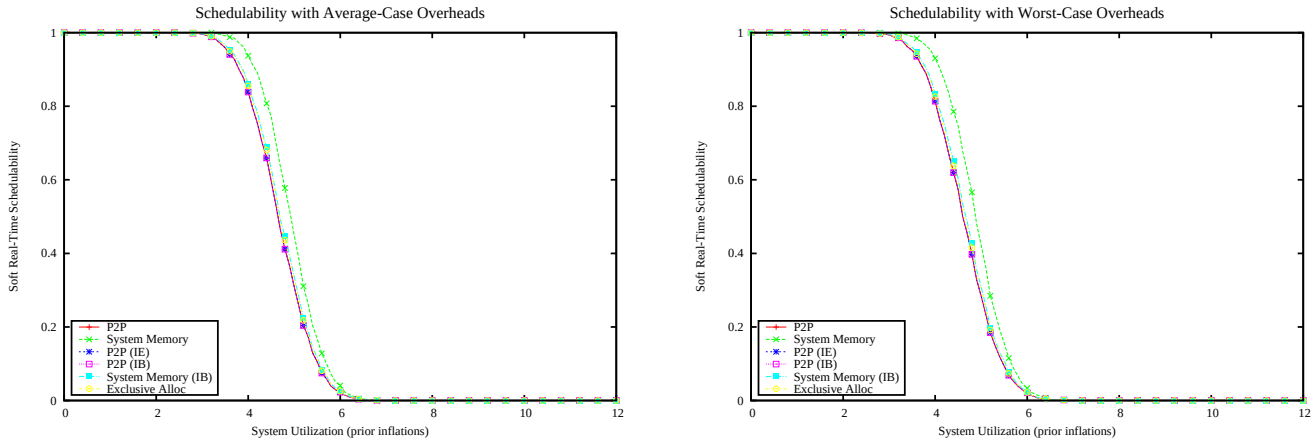

Figure 6980: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

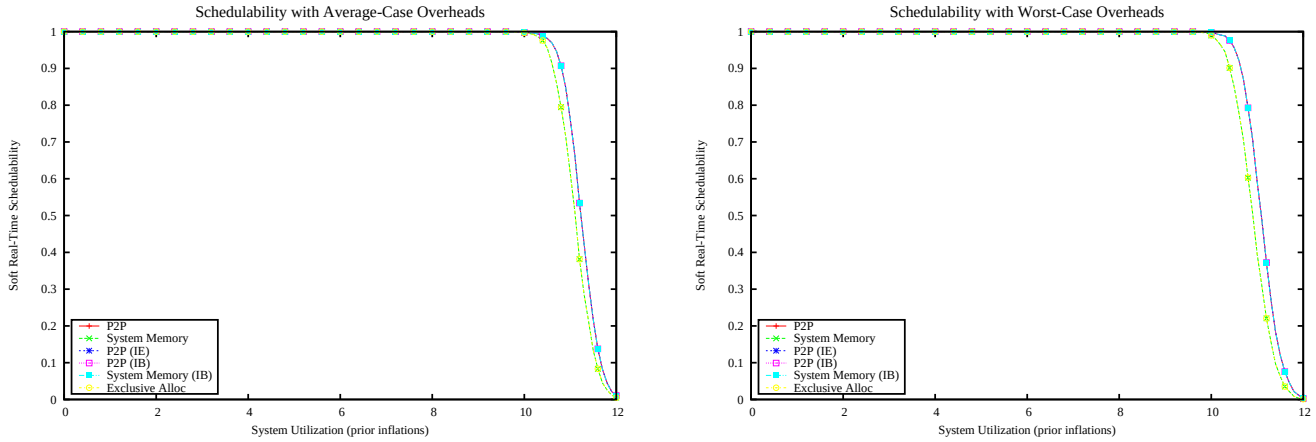

Figure 6981: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

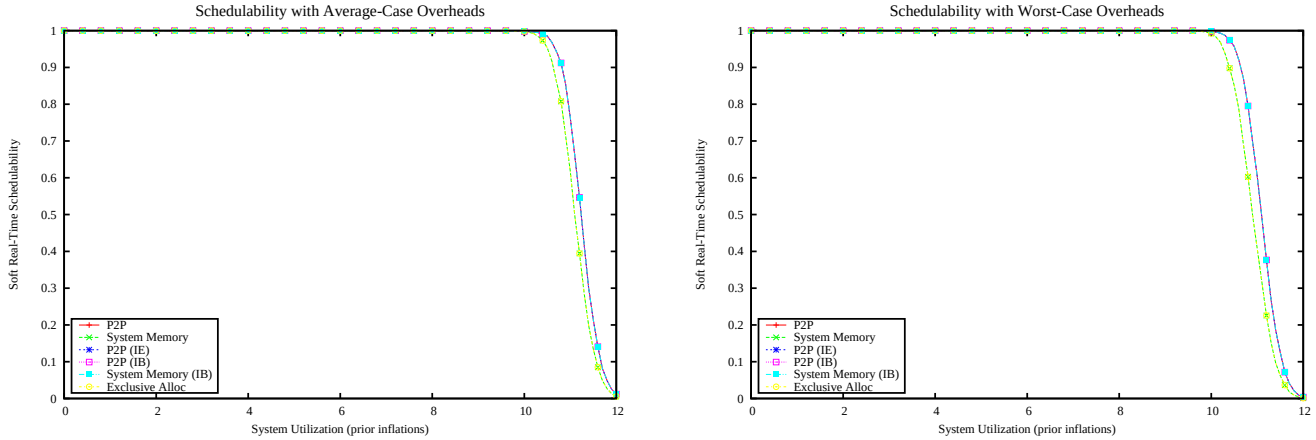

Figure 6982: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

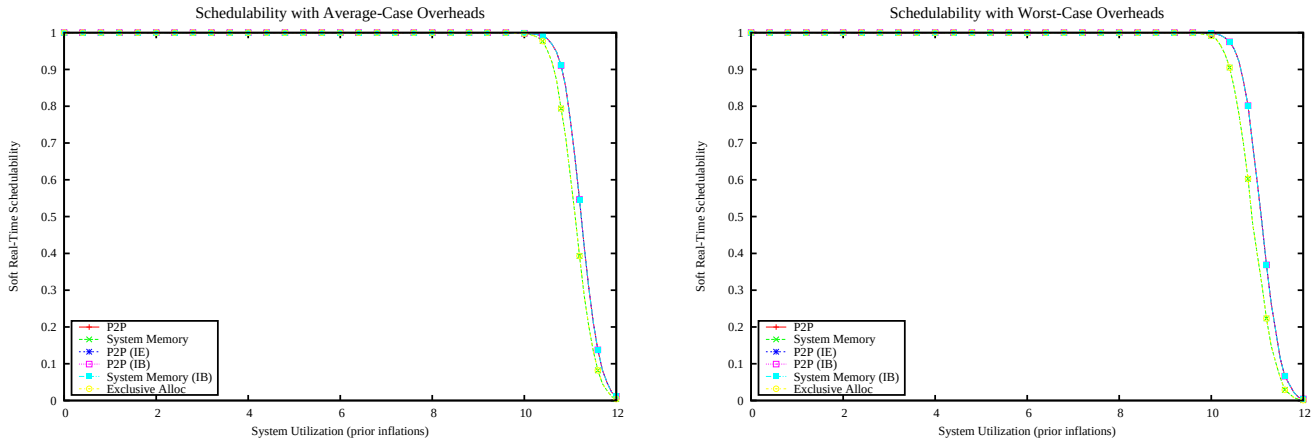

Figure 6983: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

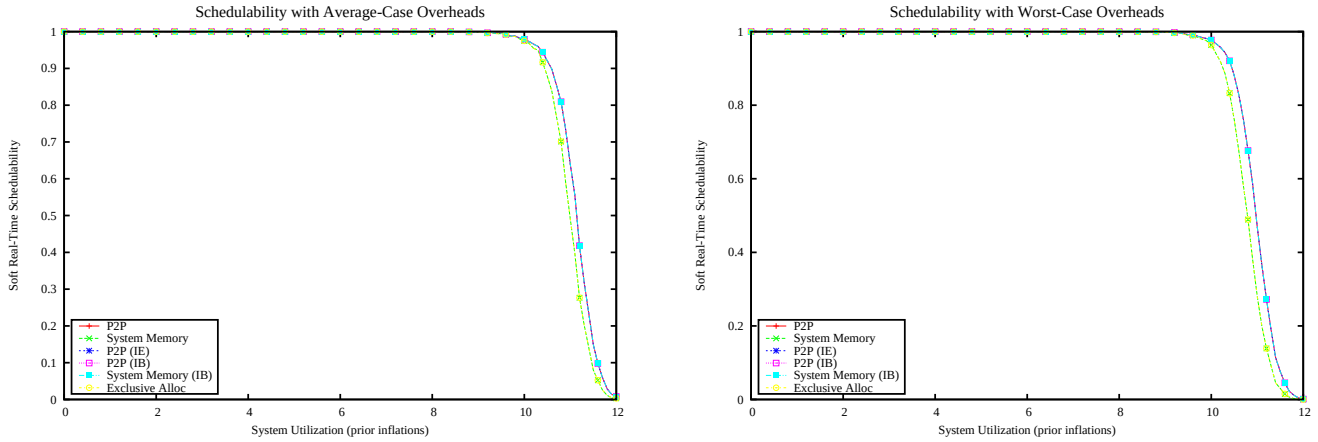

Figure 6984: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

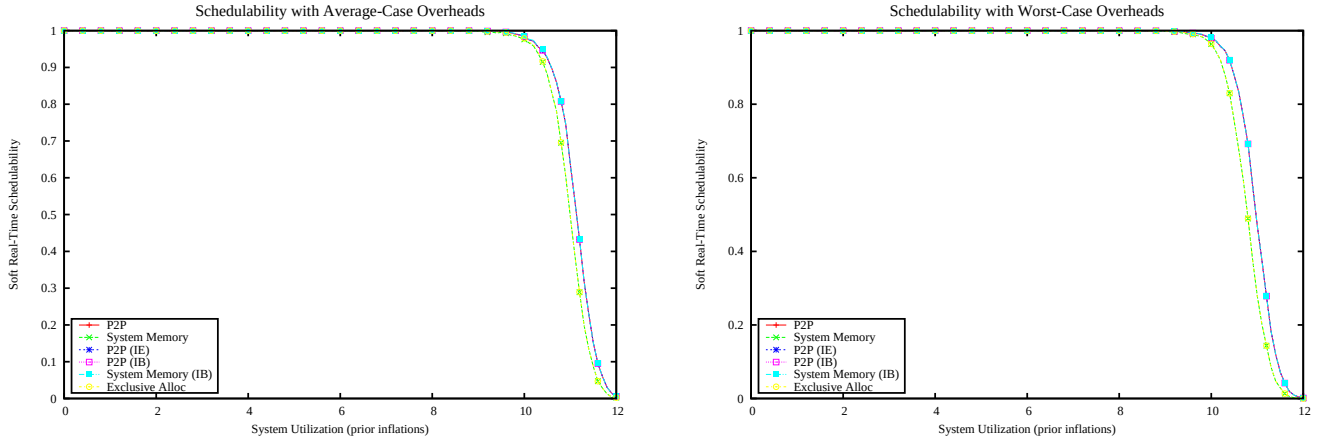

Figure 6985: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

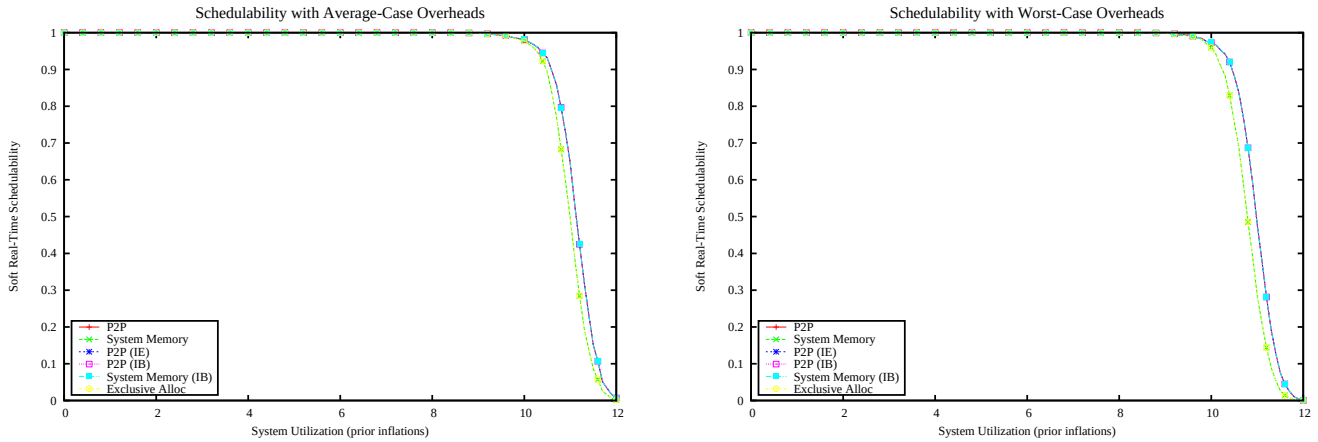

Figure 6986: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

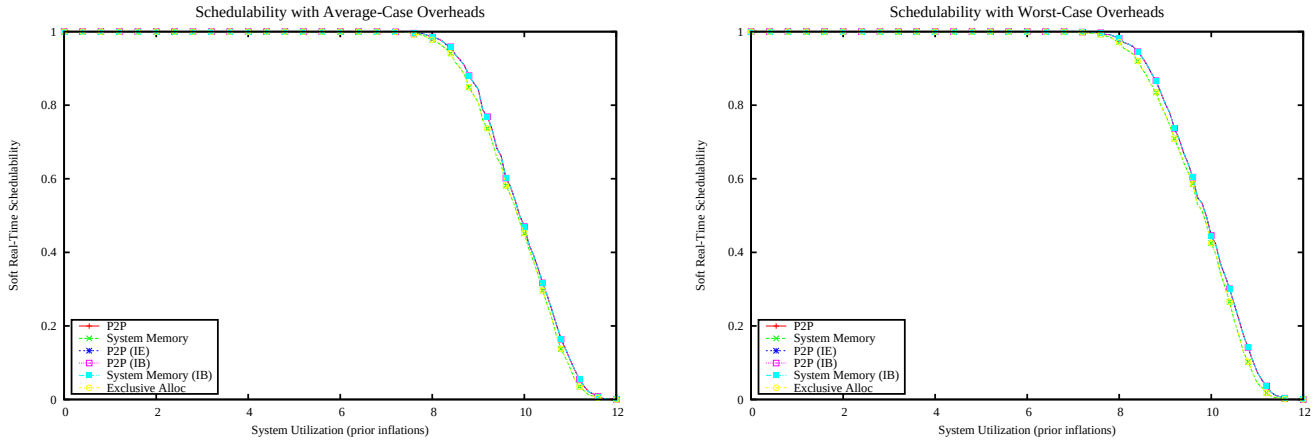

Figure 6987: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

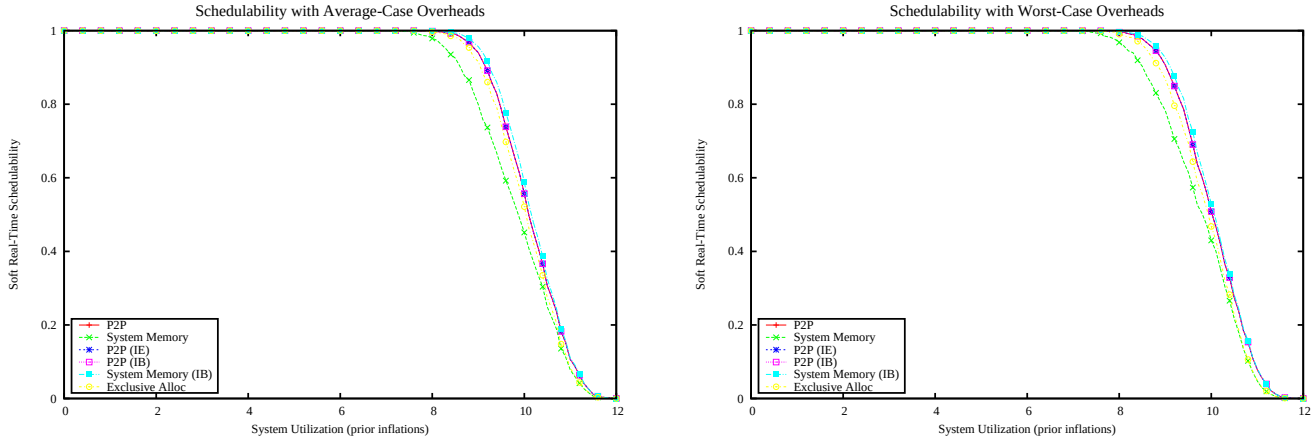

Figure 6988: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

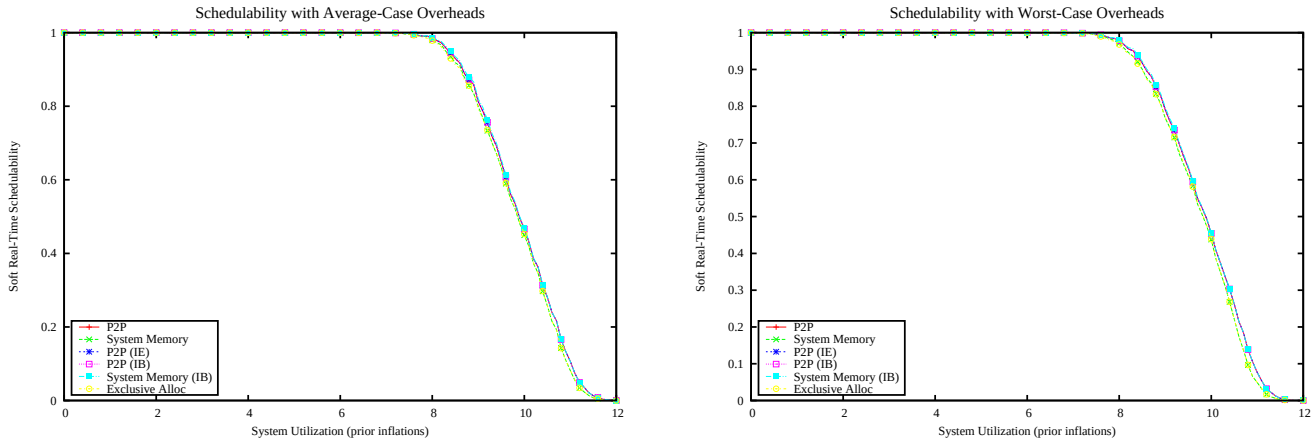

Figure 6989: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

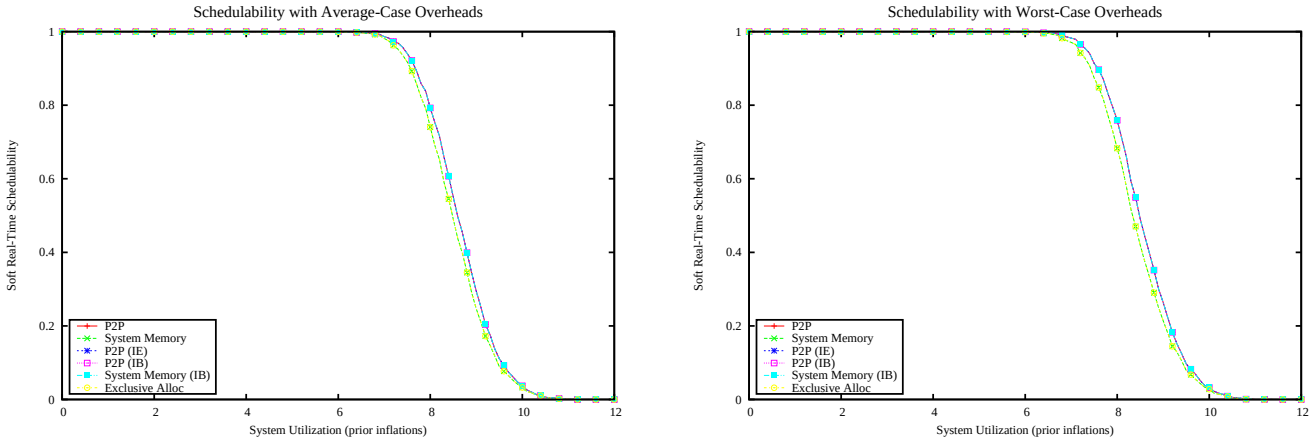

Figure 6990: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

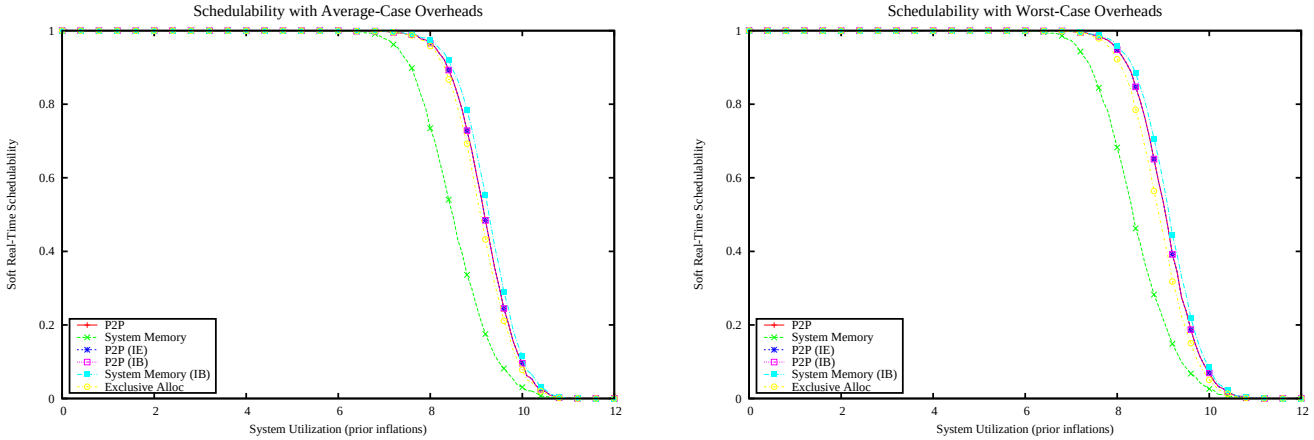

Figure 6991: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

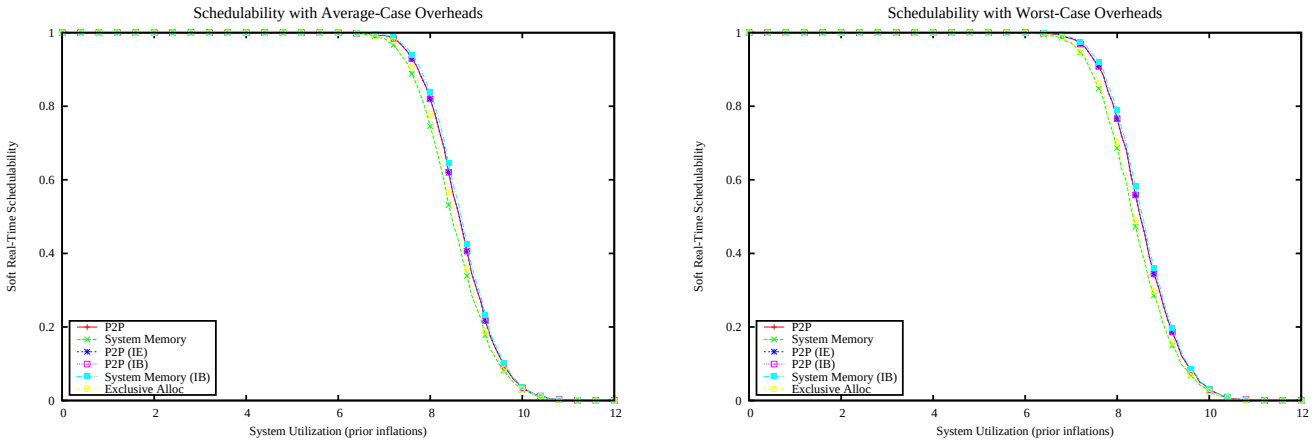

Figure 6992: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

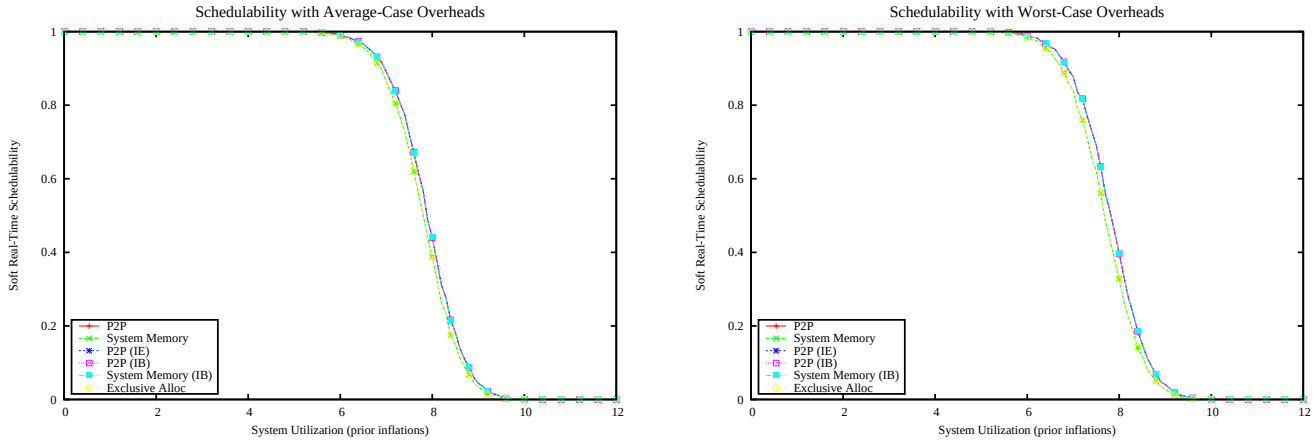

Figure 6993: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

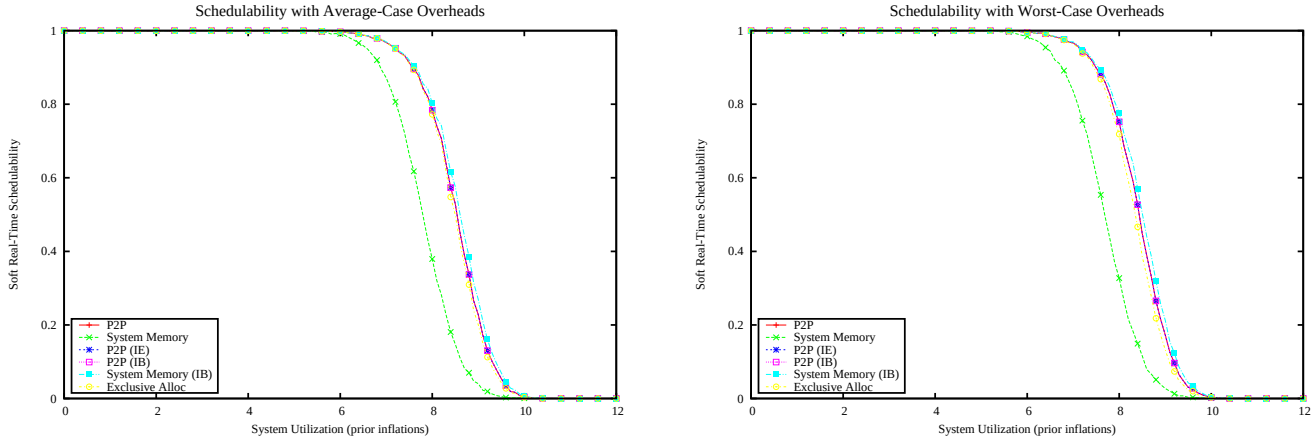

Figure 6994: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

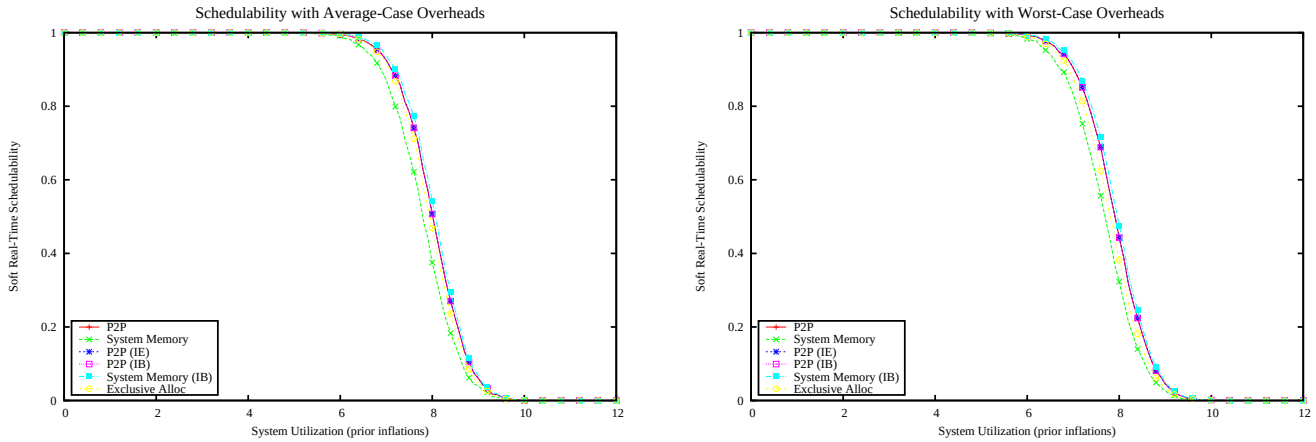

Figure 6995: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

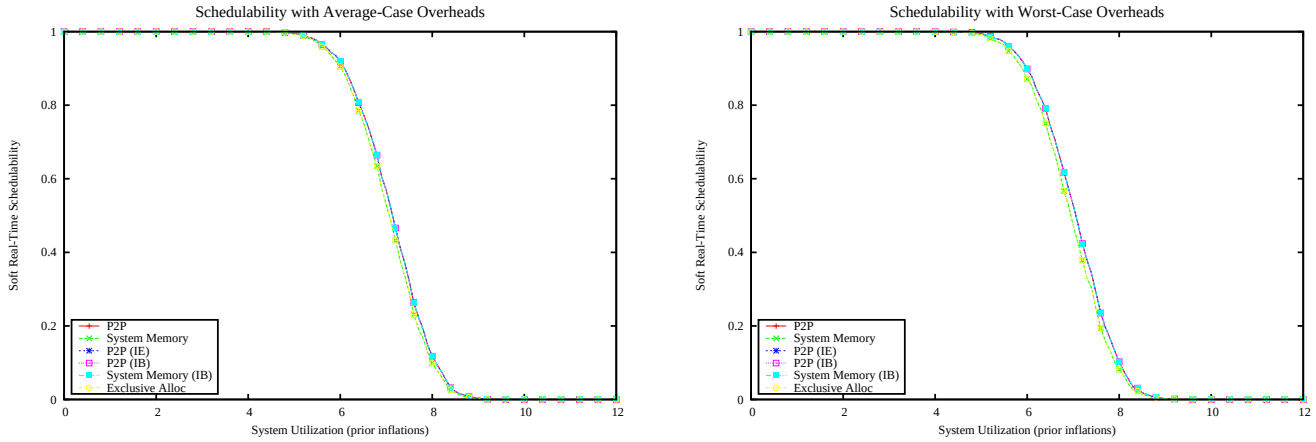

Figure 6996: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

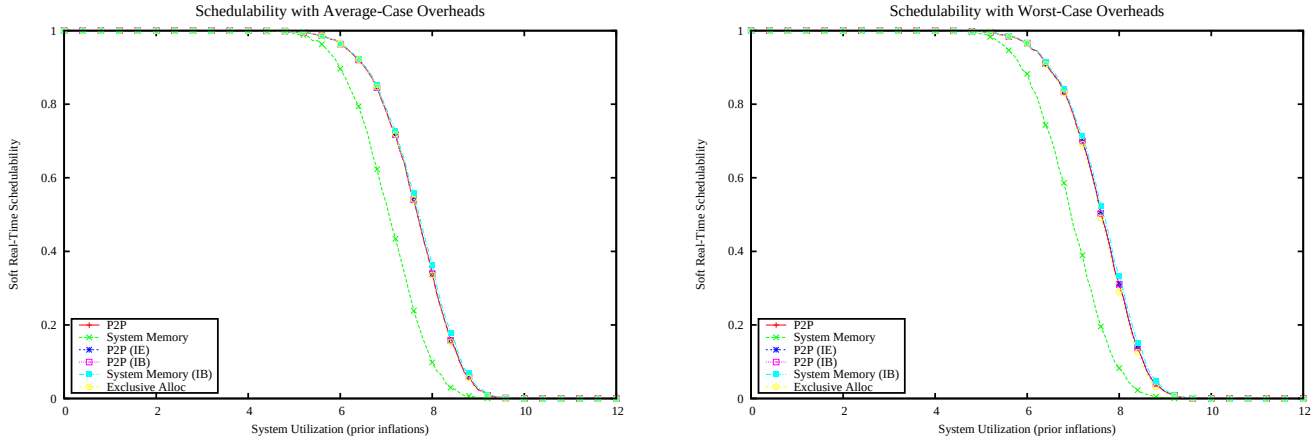

Figure 6997: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

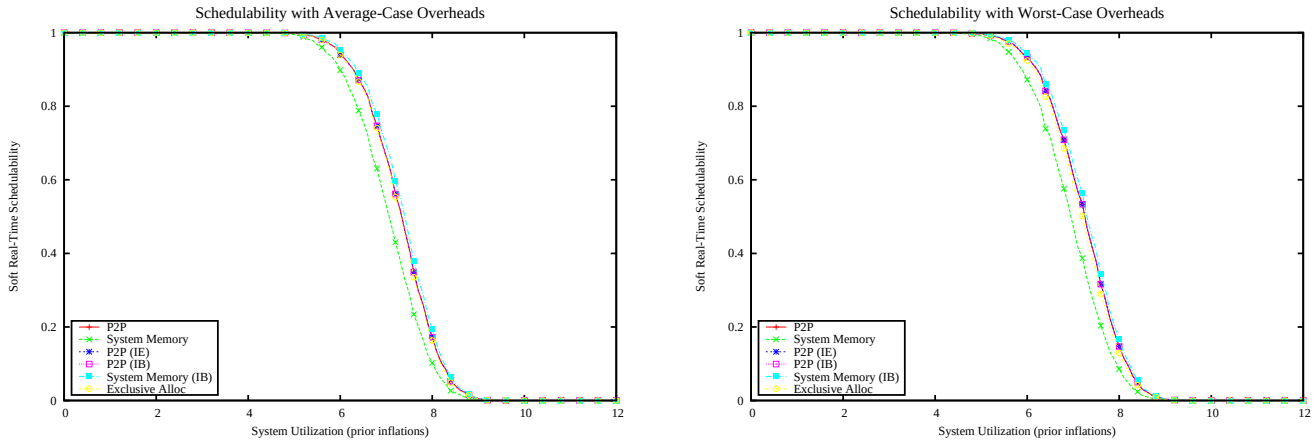

Figure 6998: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

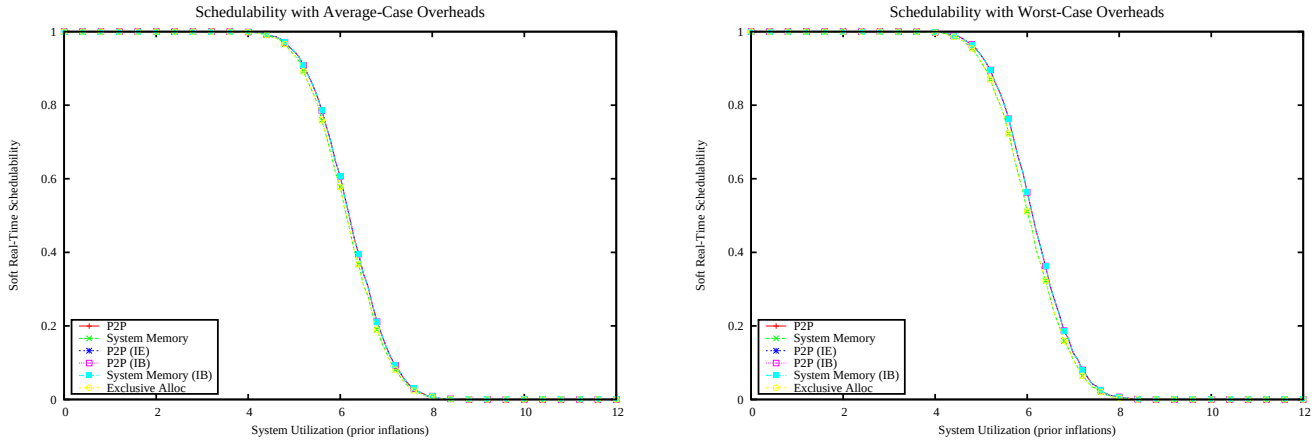

Figure 6999: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

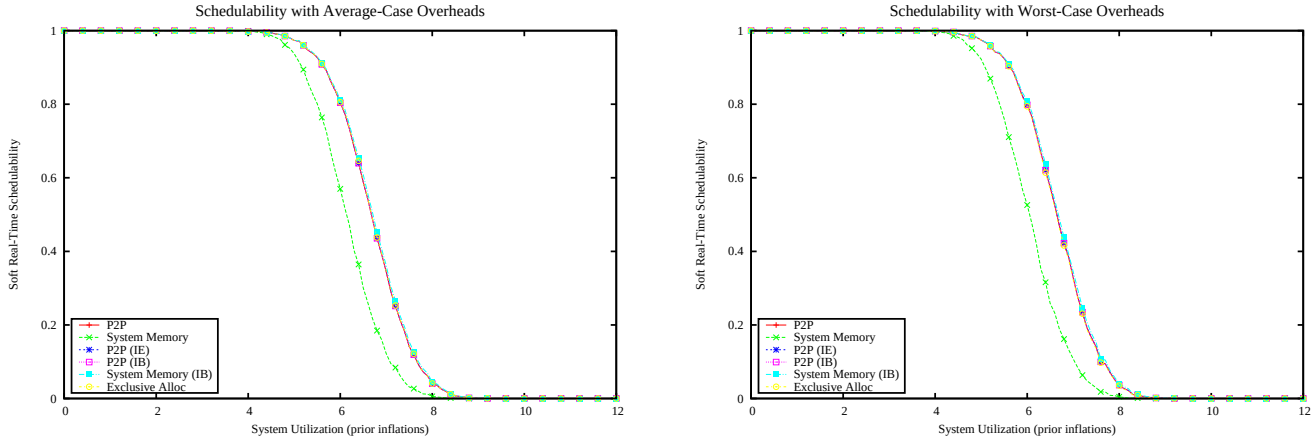

Figure 7000: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

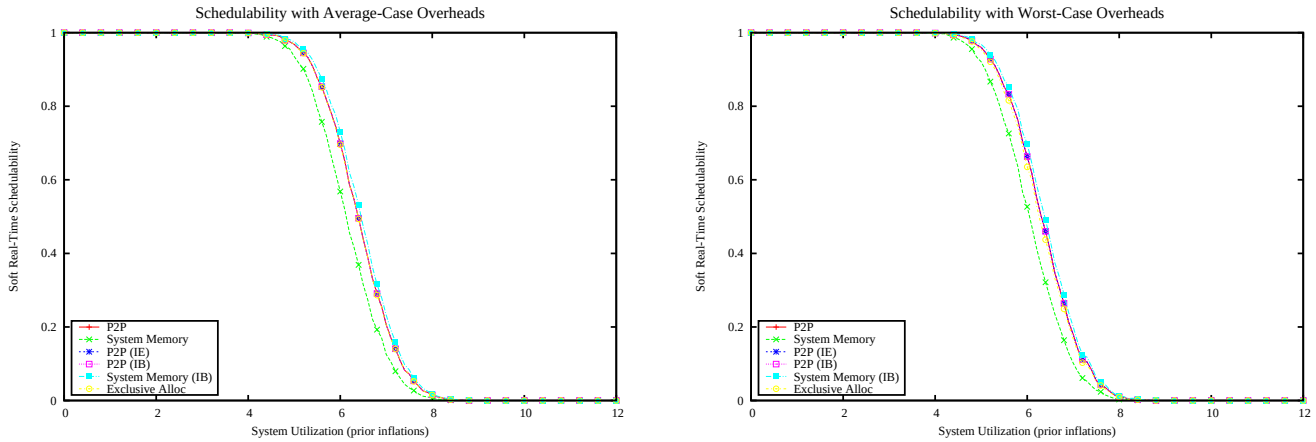

Figure 7001: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

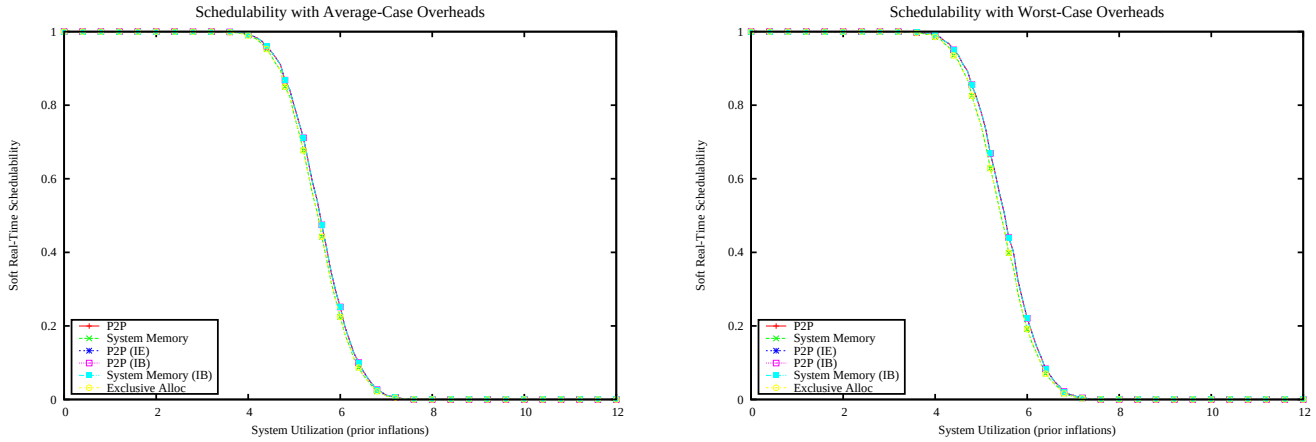

Figure 7002: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

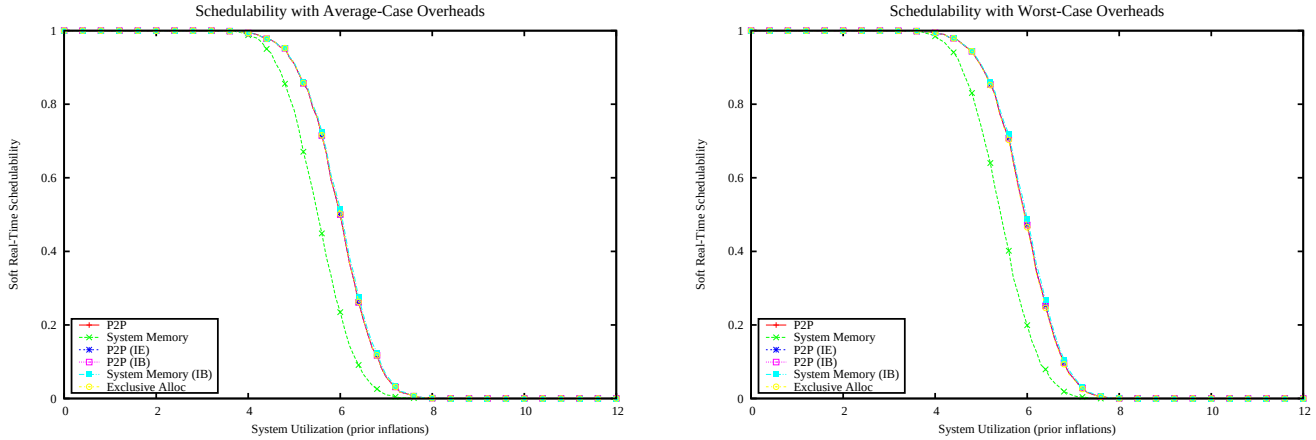

Figure 7003: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

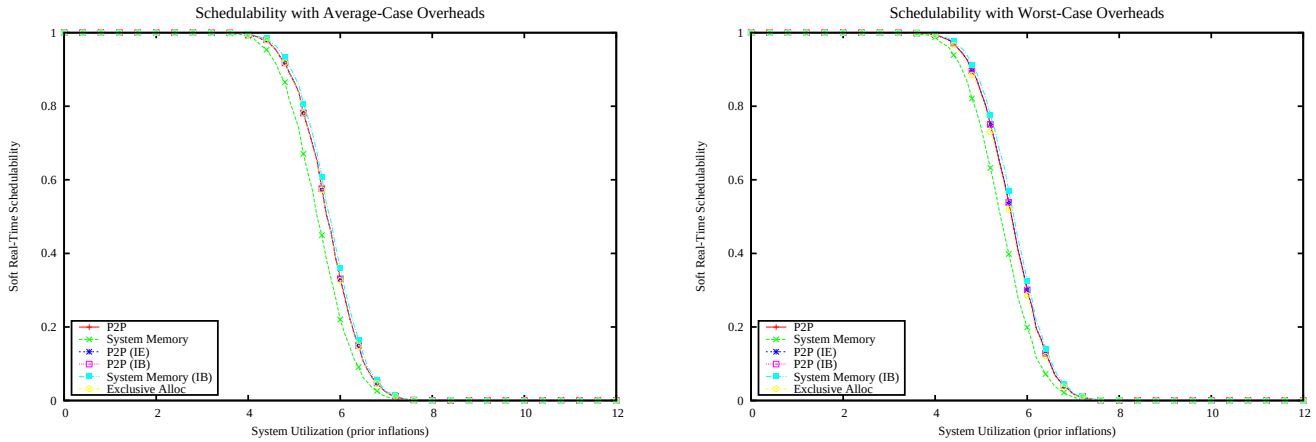

Figure 7004: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

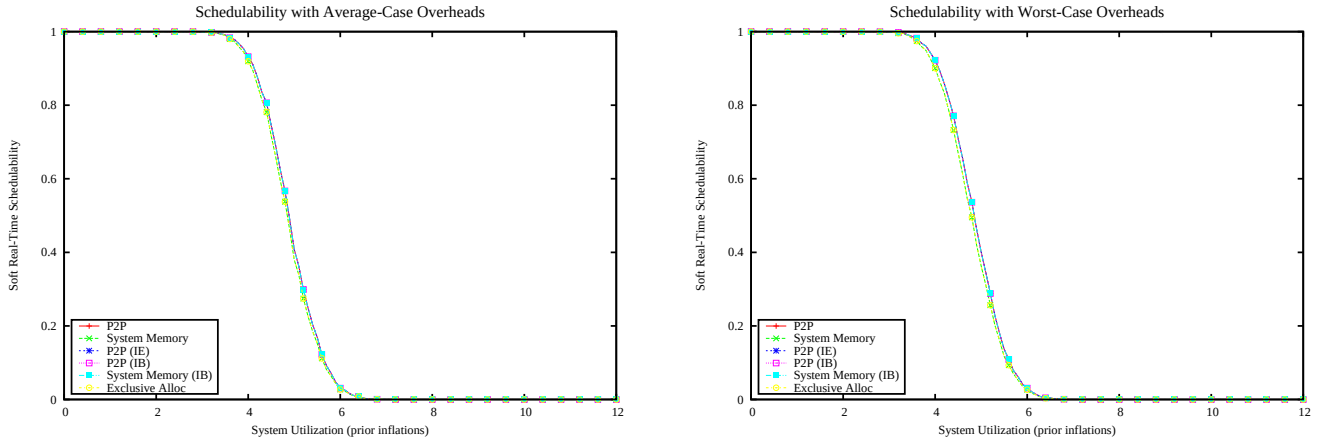

Figure 7005: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

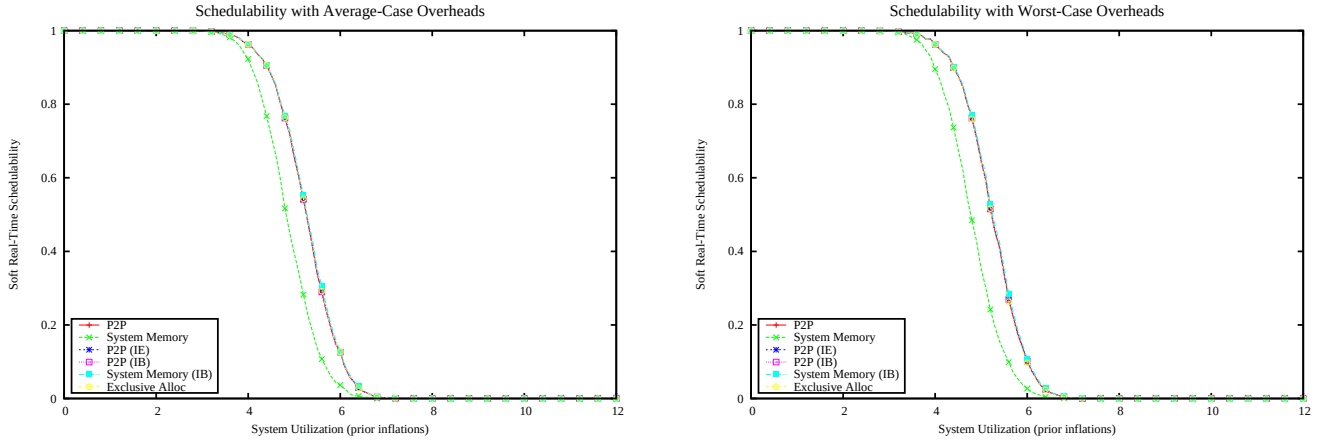

Figure 7006: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

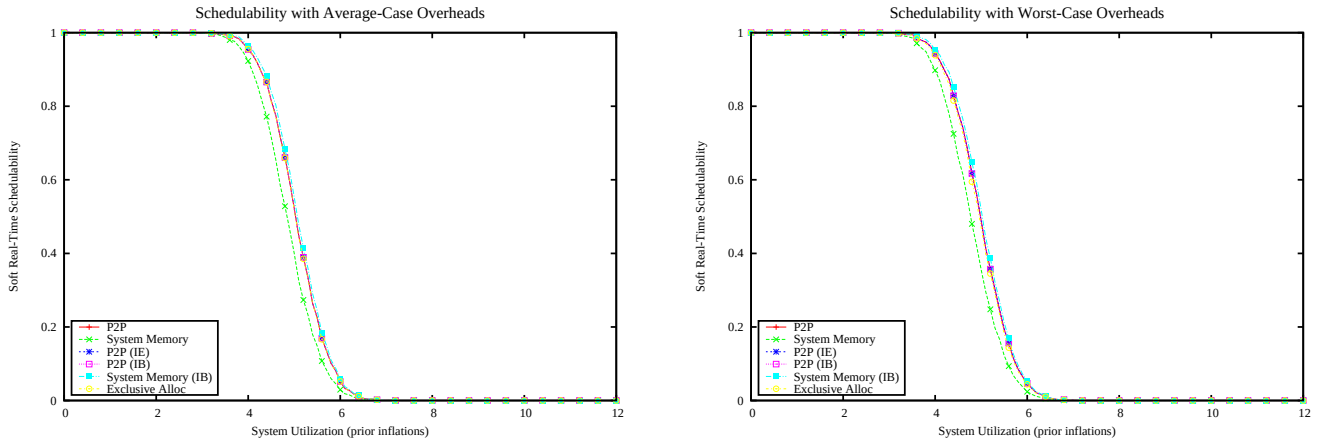

Figure 7007: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

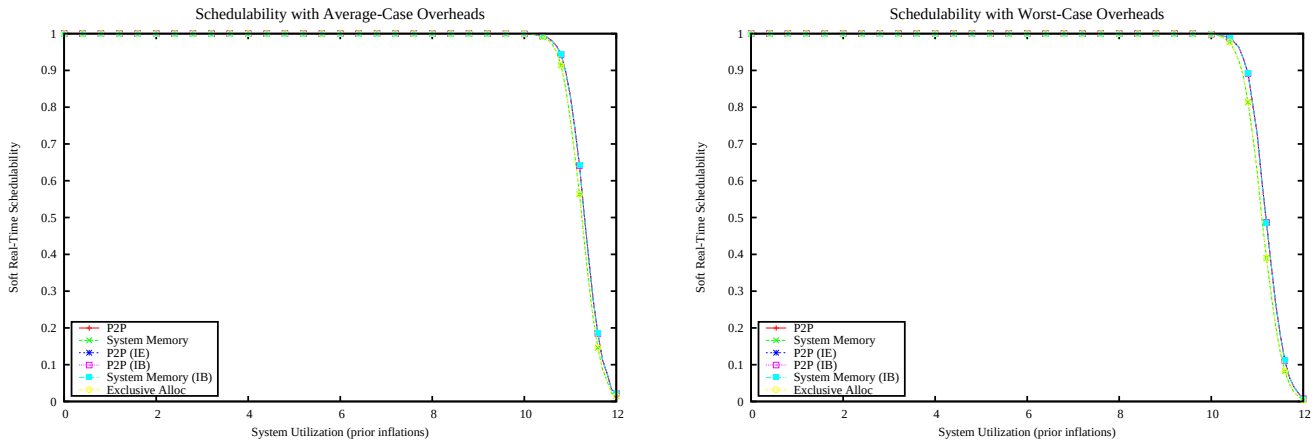

Figure 7008: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

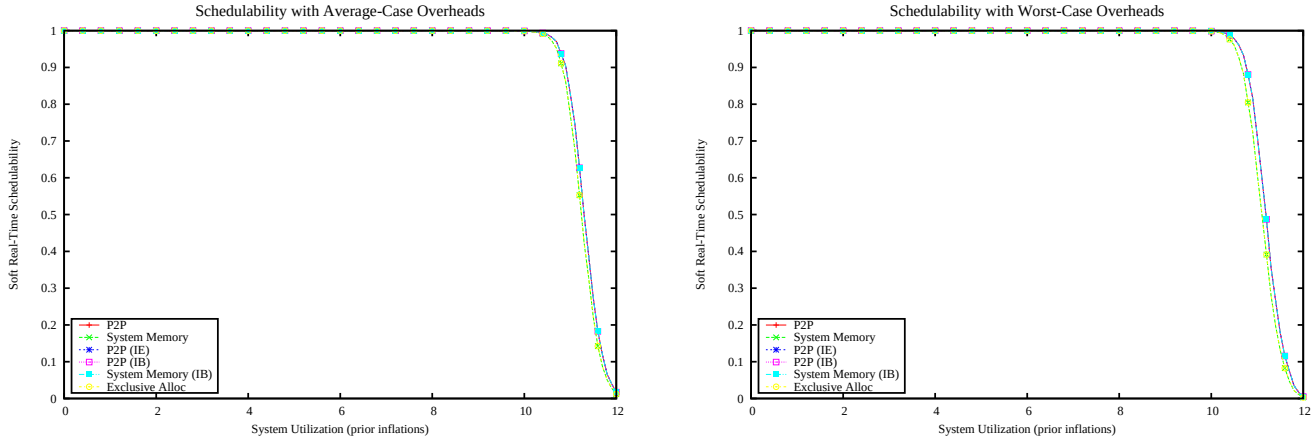

Figure 7009: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

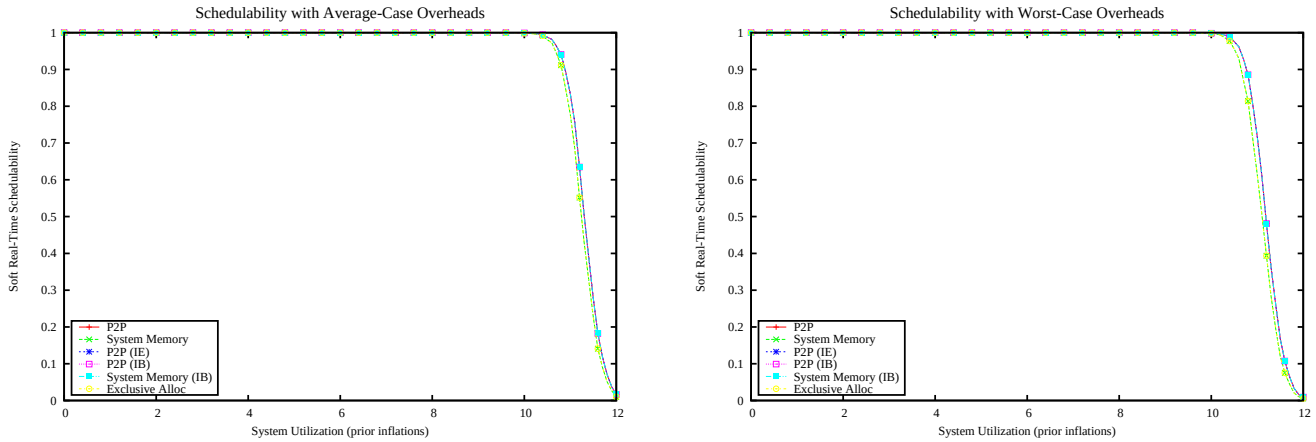

Figure 7010: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

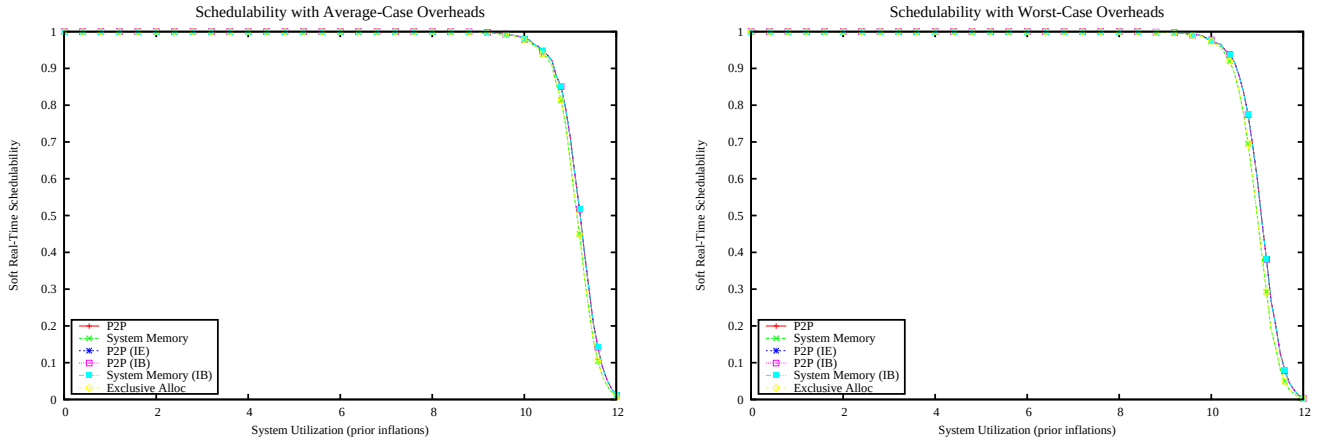

Figure 7011: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

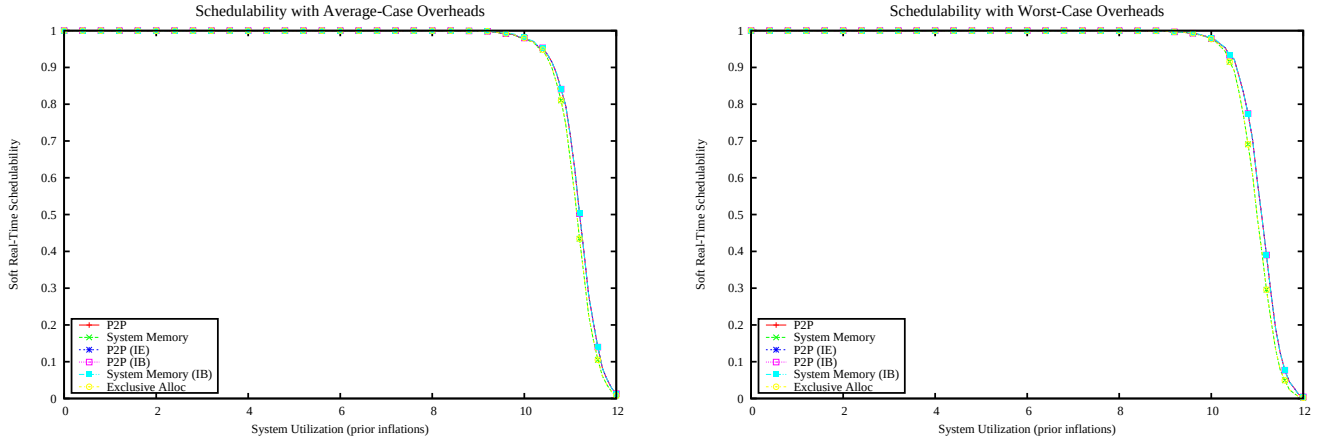

Figure 7012: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

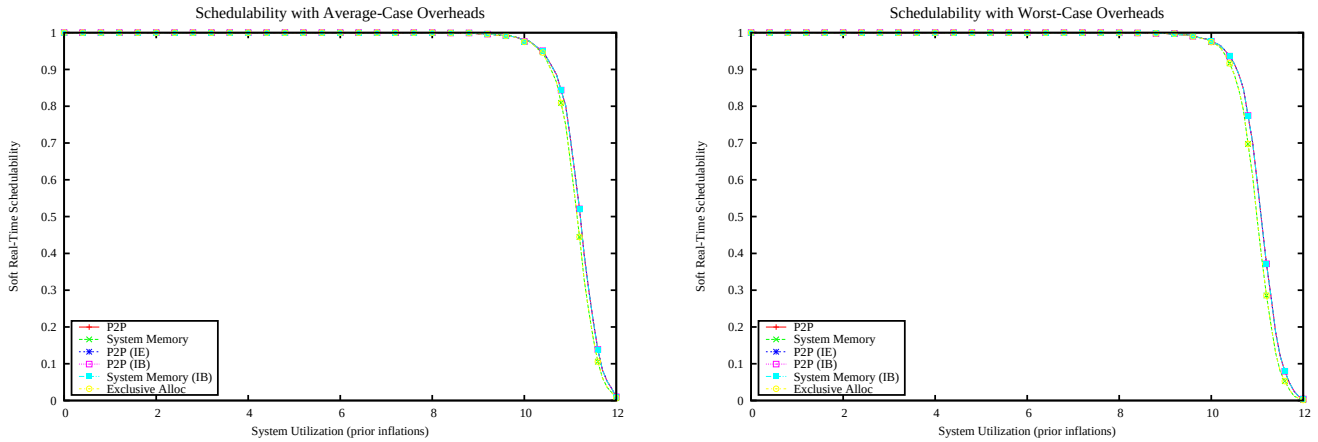

Figure 7013: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

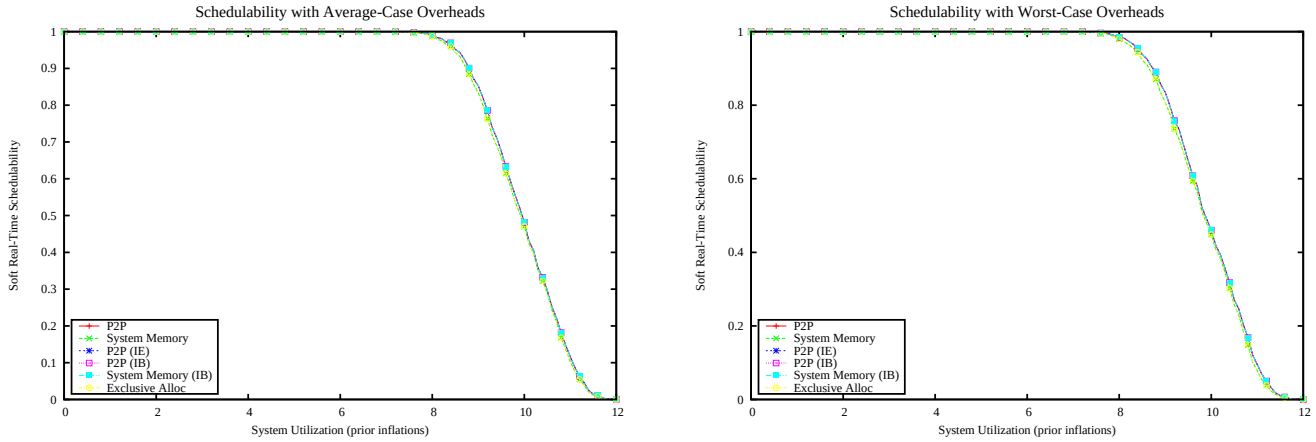

Figure 7014: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

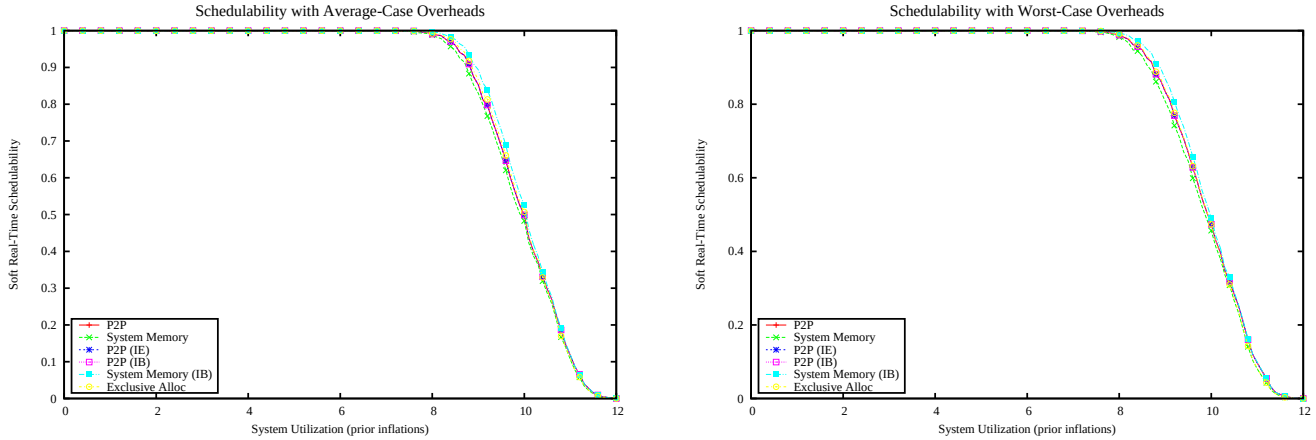

Figure 7015: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

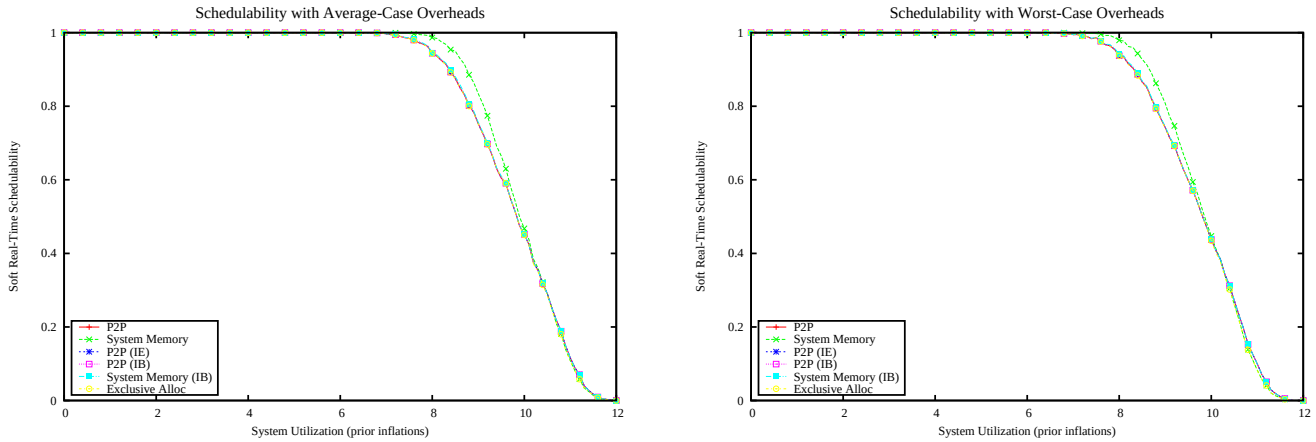

Figure 7016: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

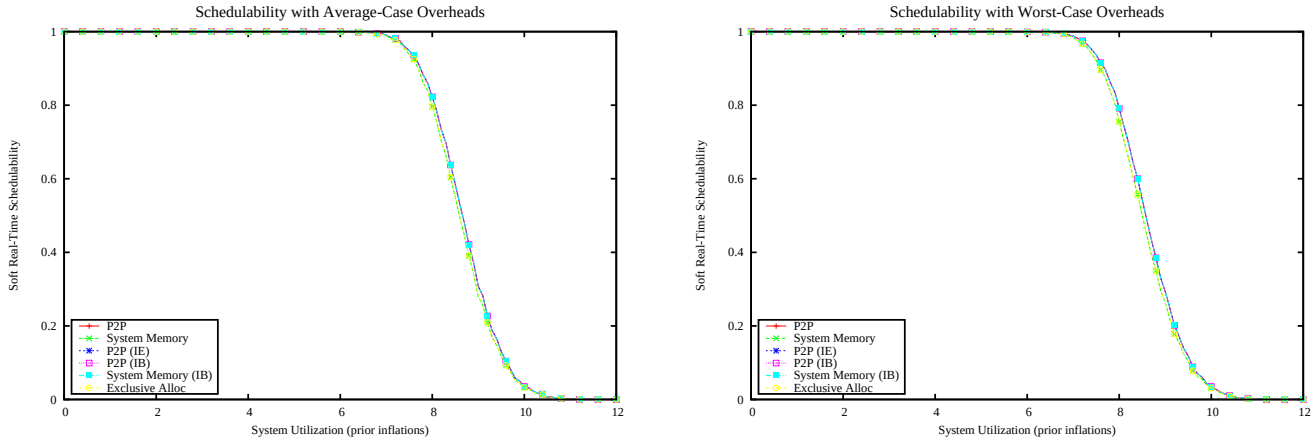

Figure 7017: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

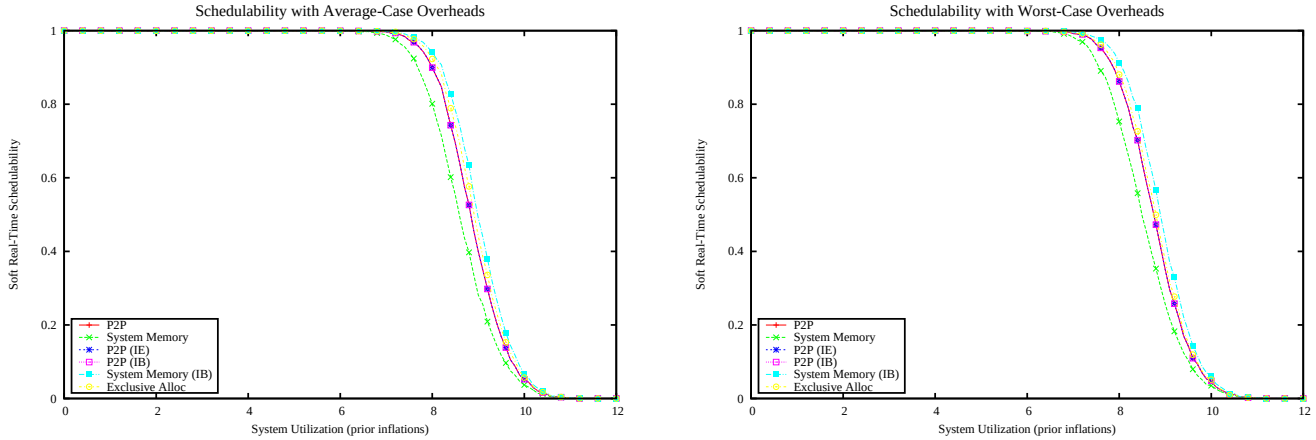

Figure 7018: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

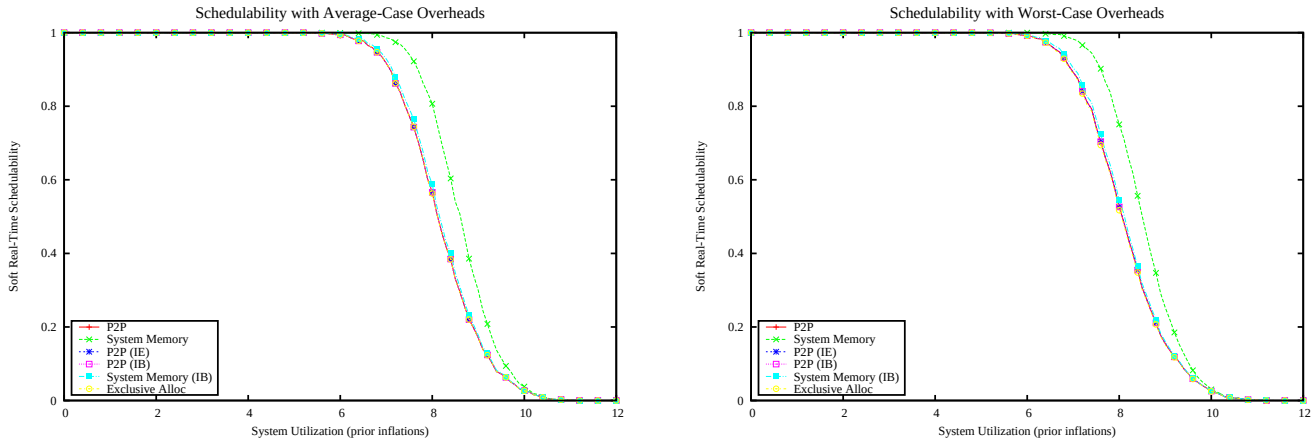

Figure 7019: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

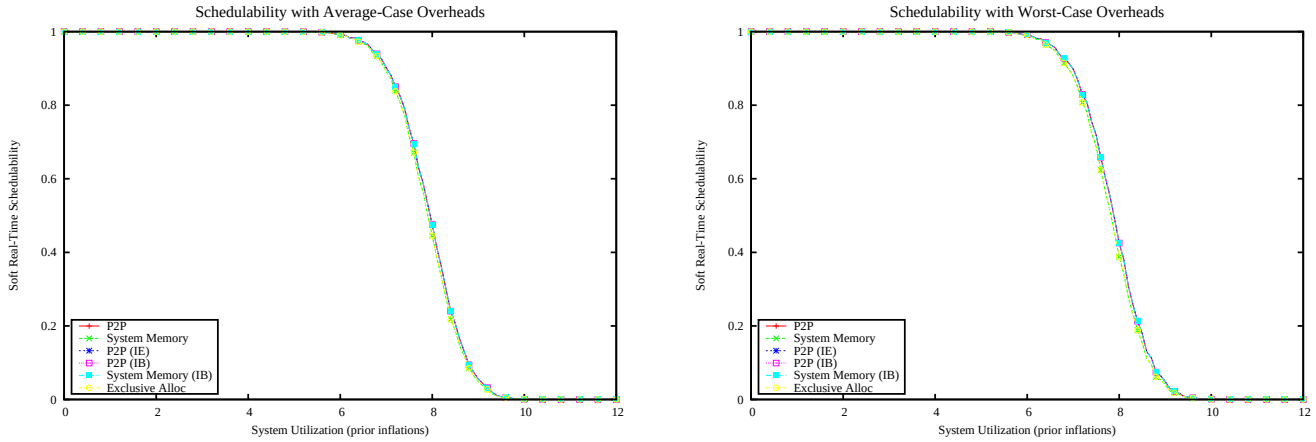

Figure 7020: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

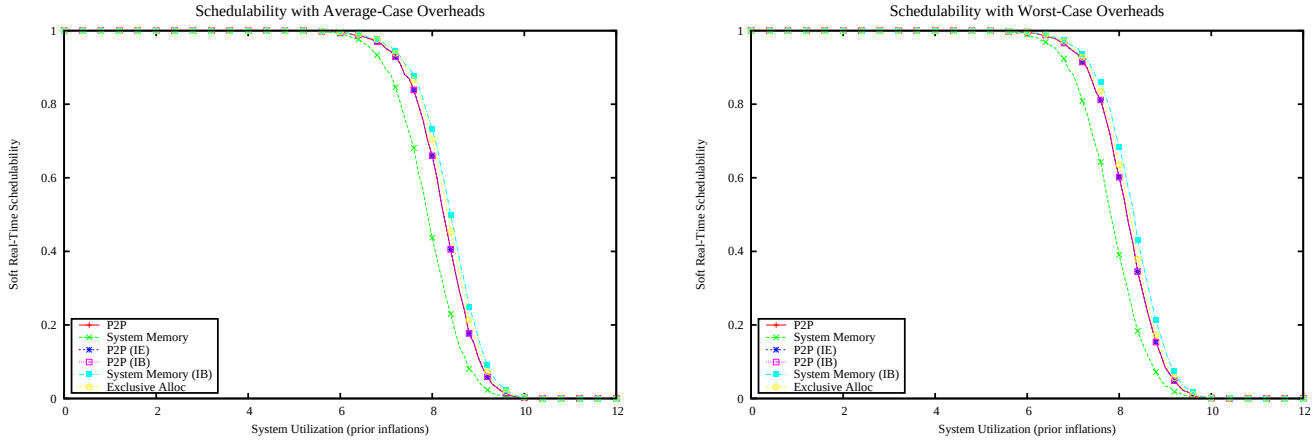

Figure 7021: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

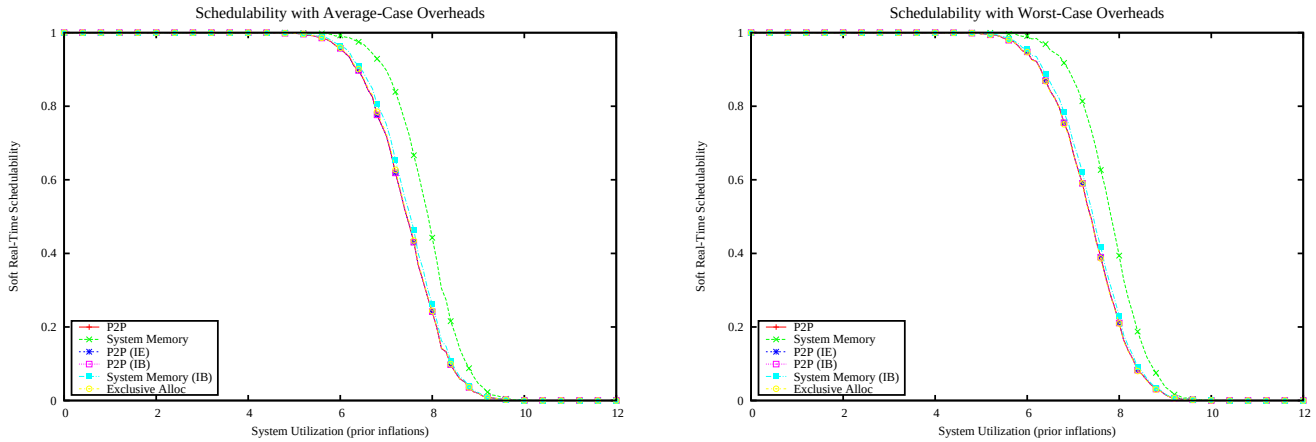

Figure 7022: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

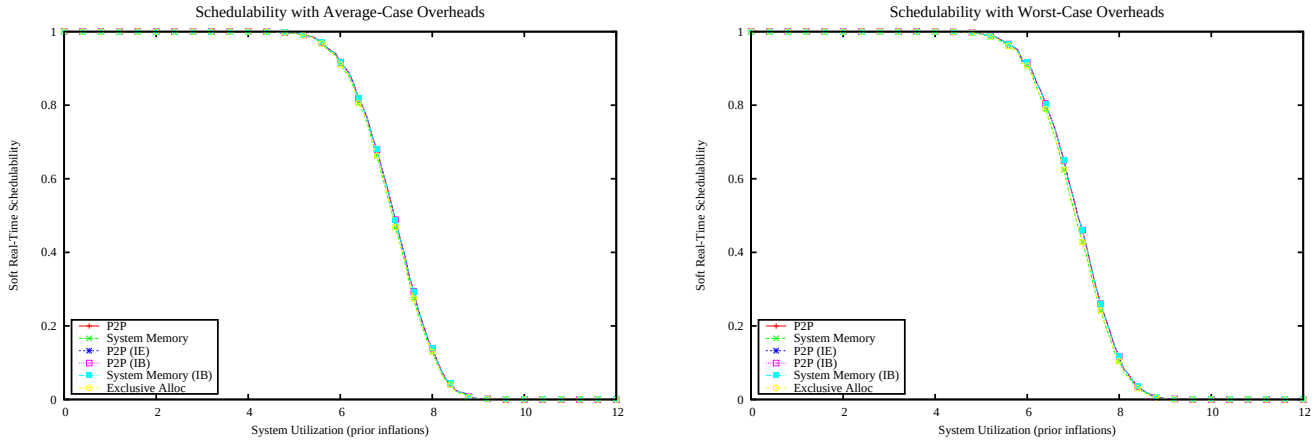

Figure 7023: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

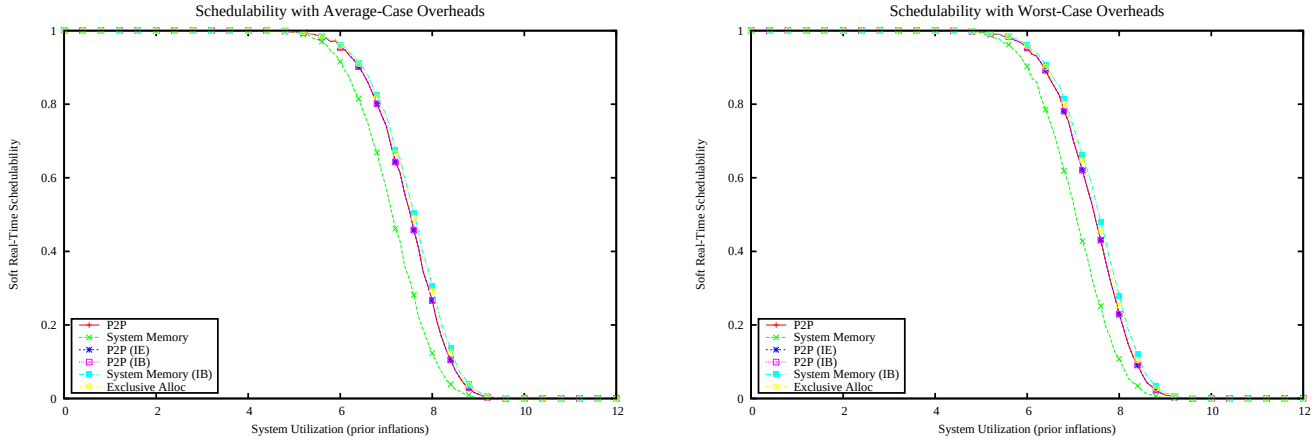

Figure 7024: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

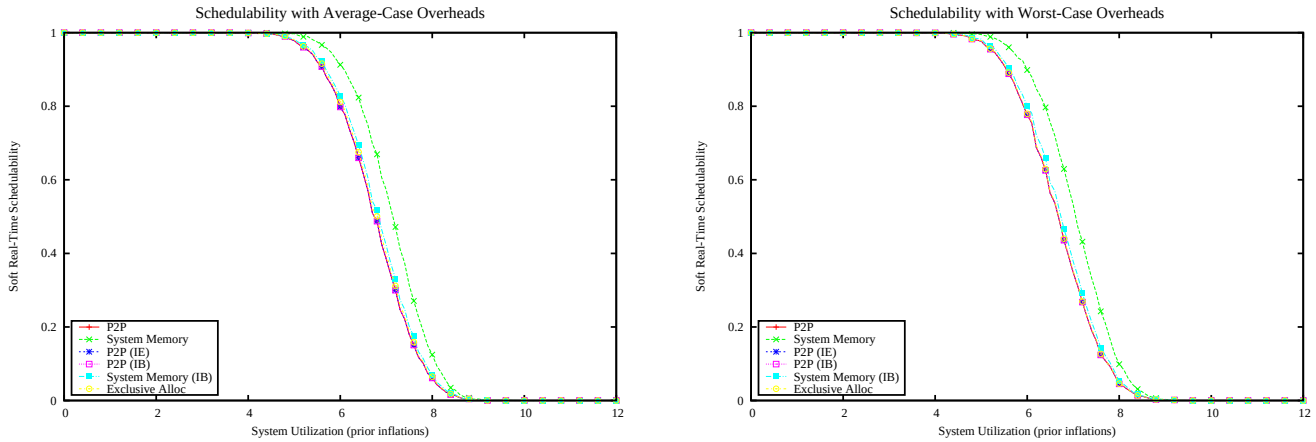

Figure 7025: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

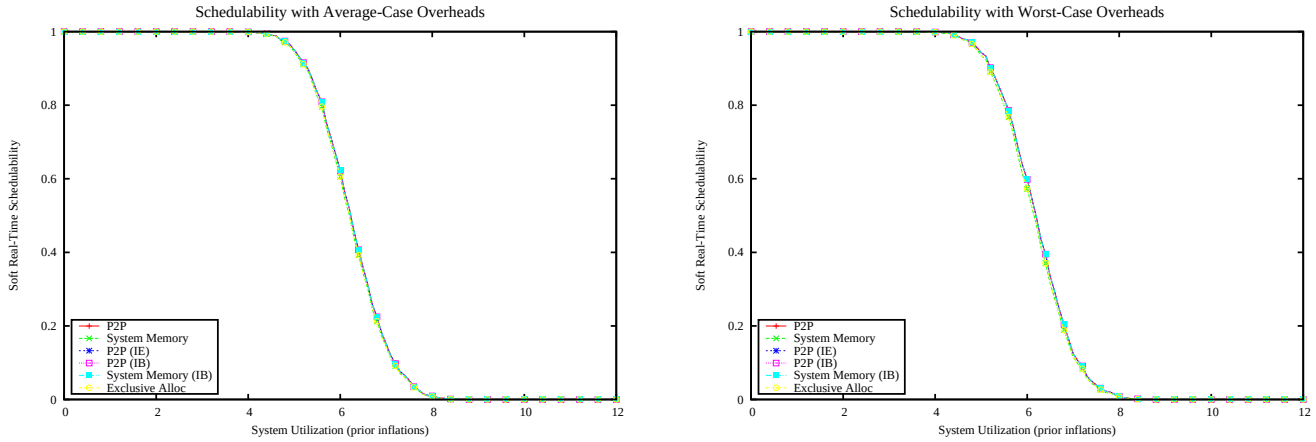

Figure 7026: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

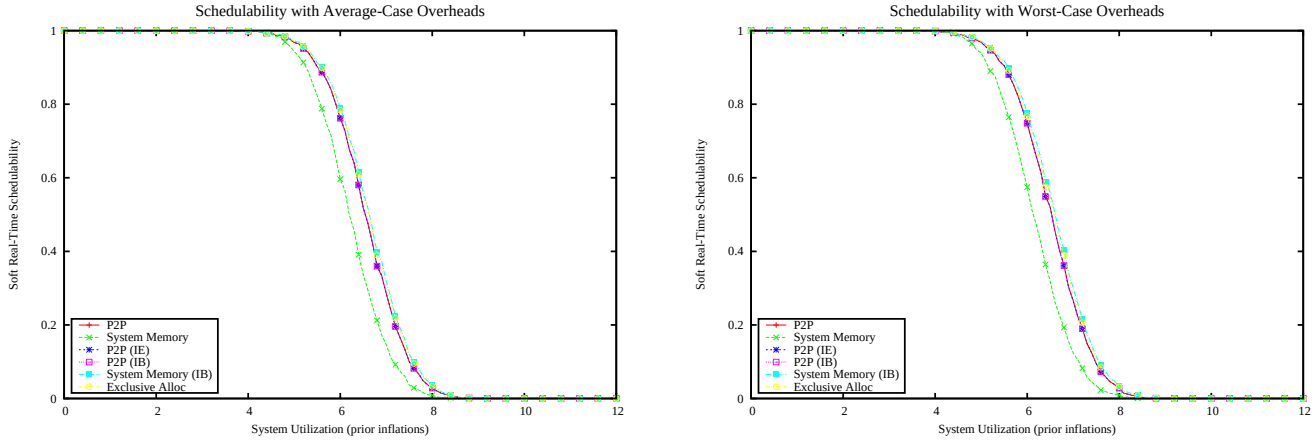

Figure 7027: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

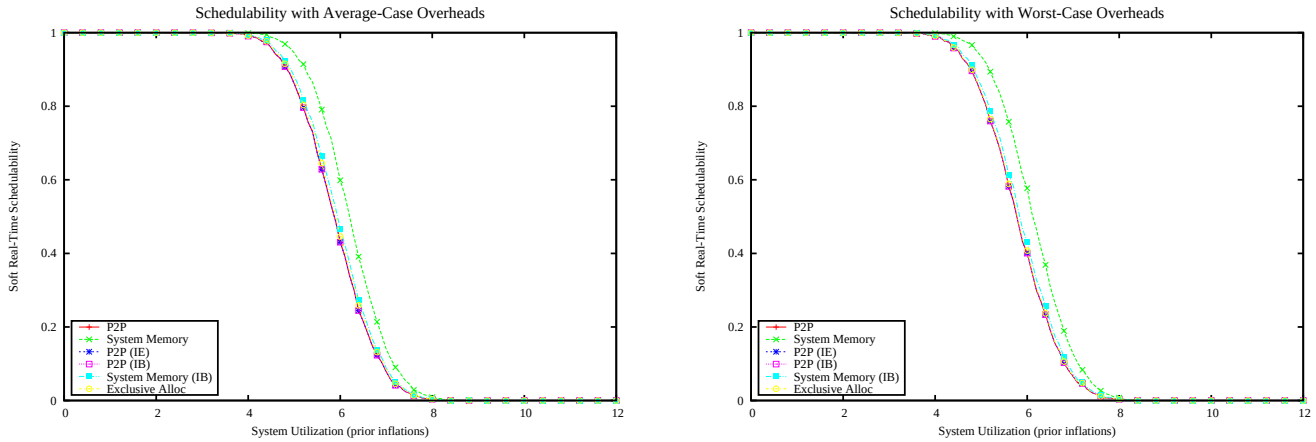

Figure 7028: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

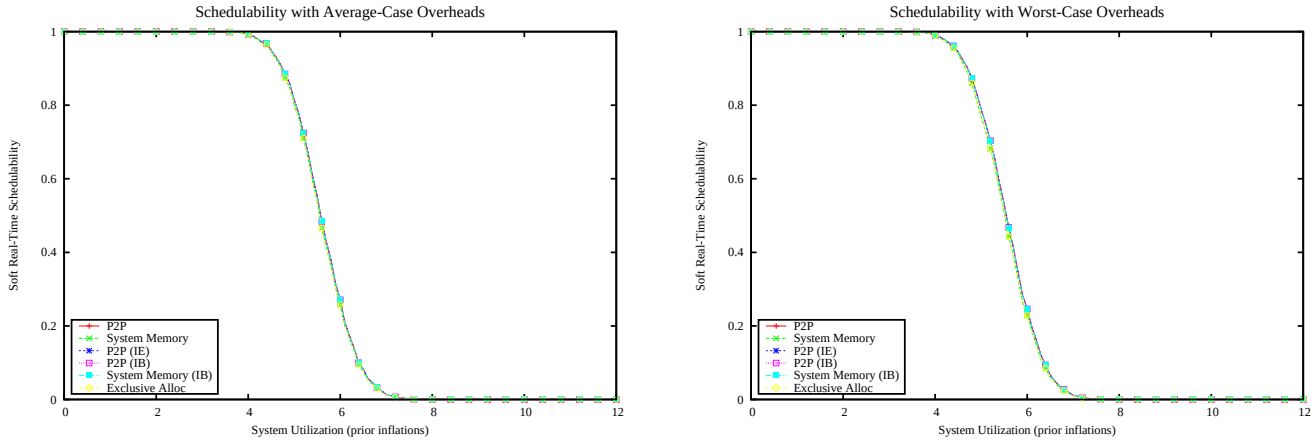

Figure 7029: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

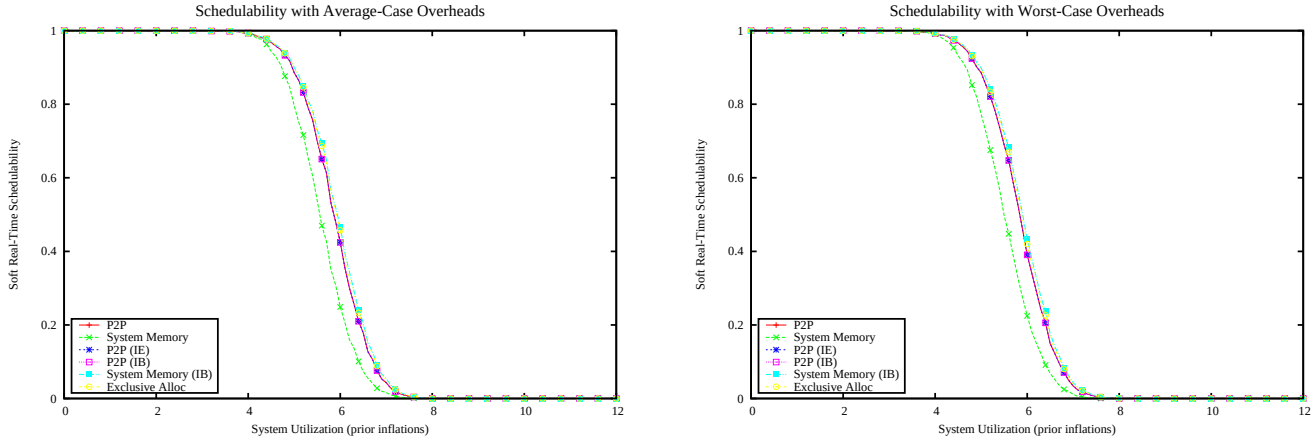

Figure 7030: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

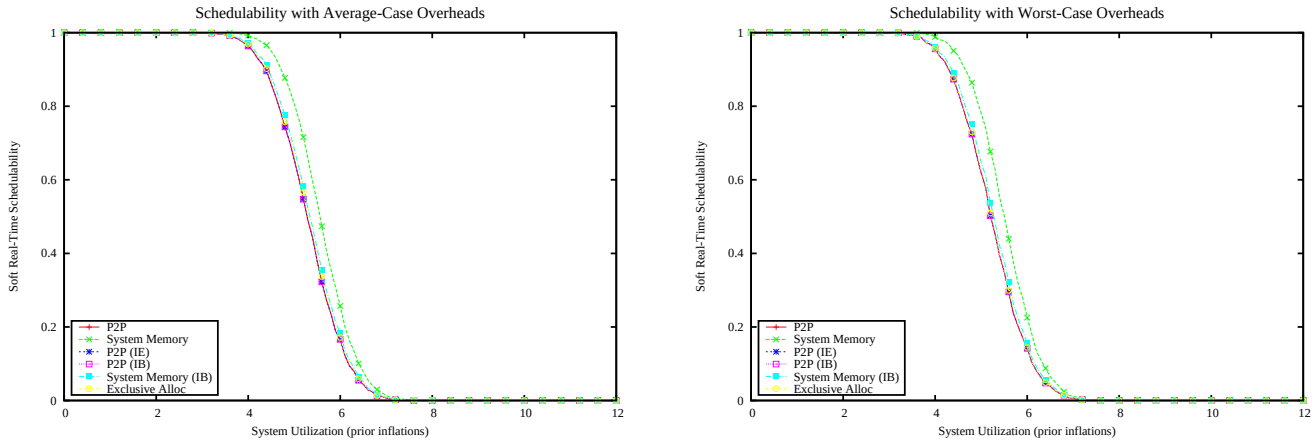

Figure 7031: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

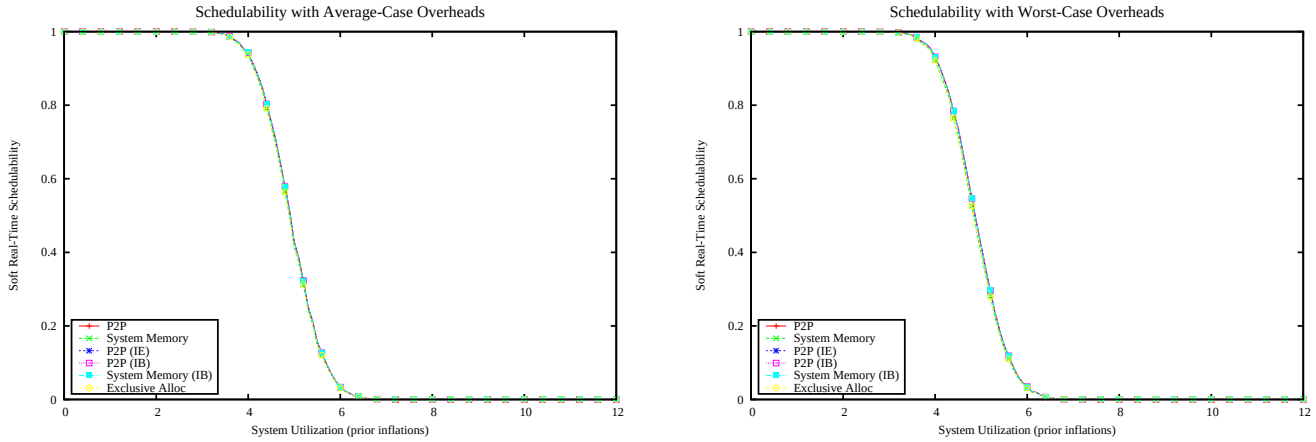

Figure 7032: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

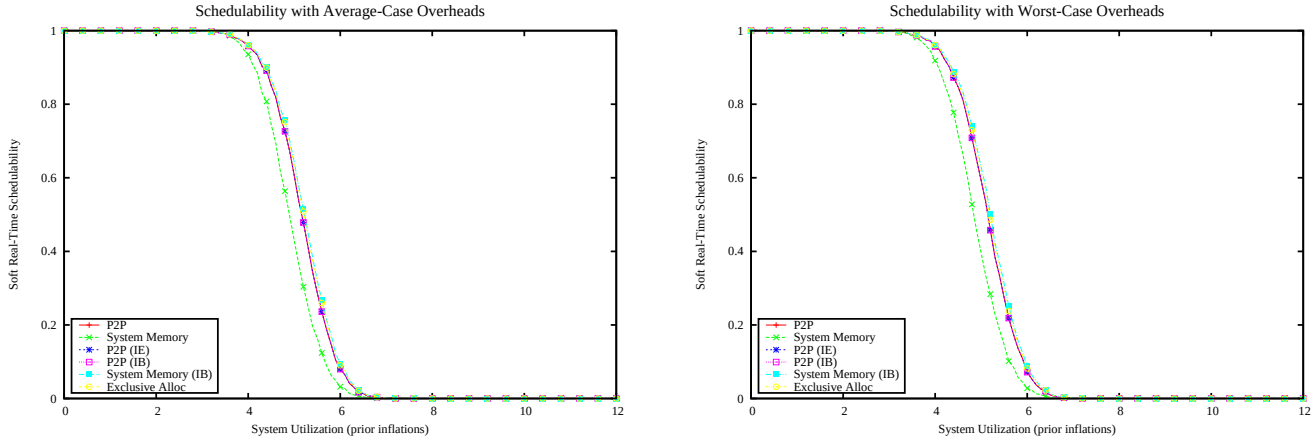

Figure 7033: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

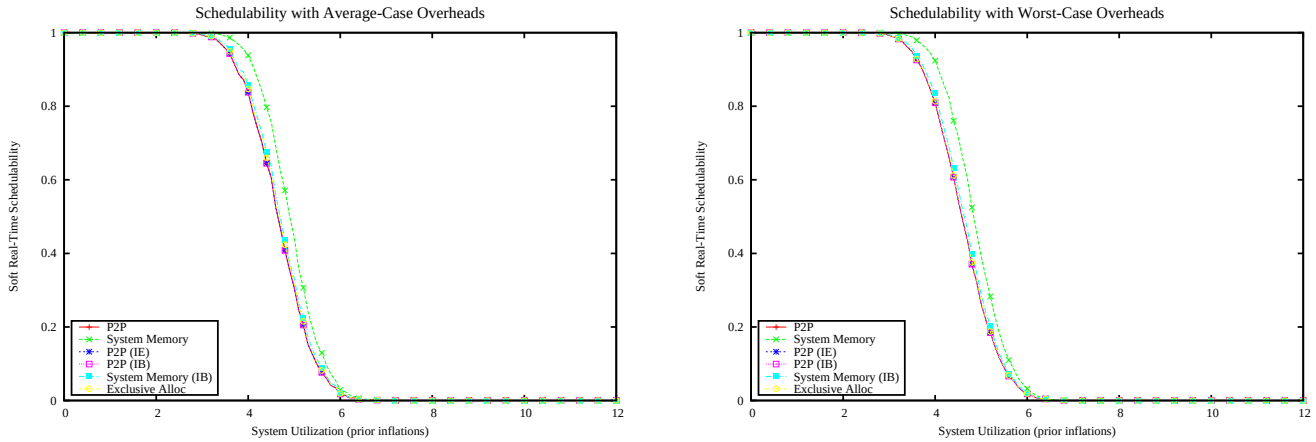

Figure 7034: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

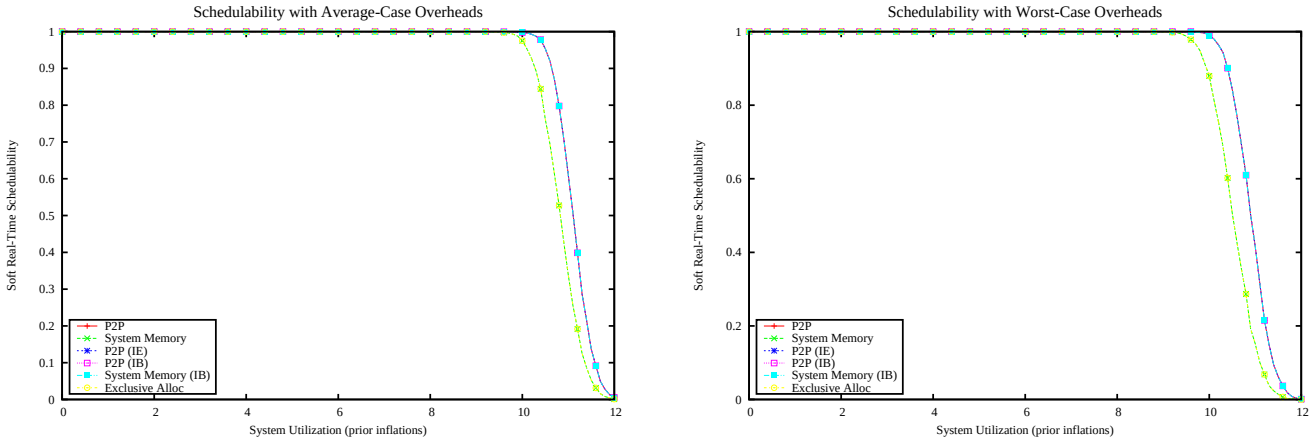

Figure 7035: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

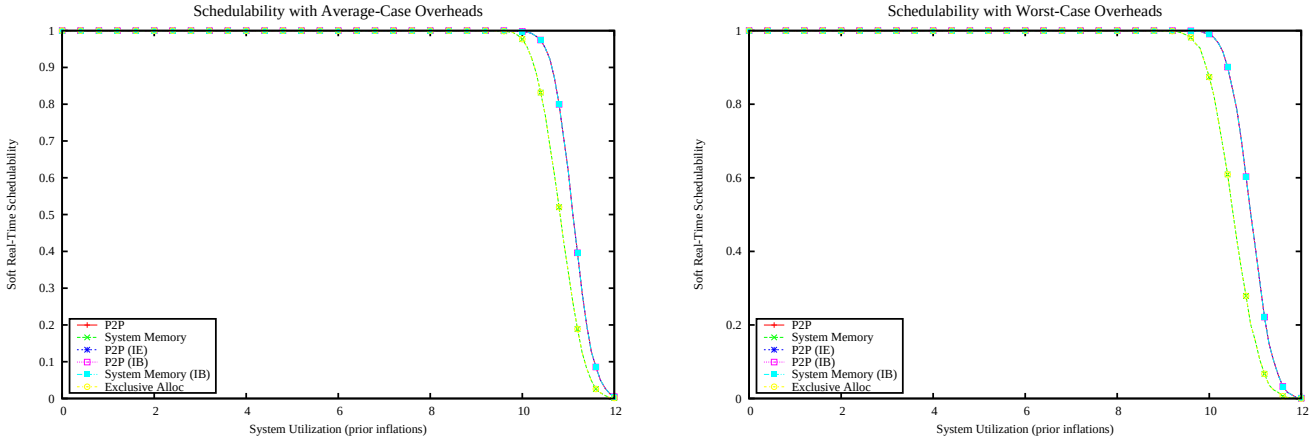

Figure 7036: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

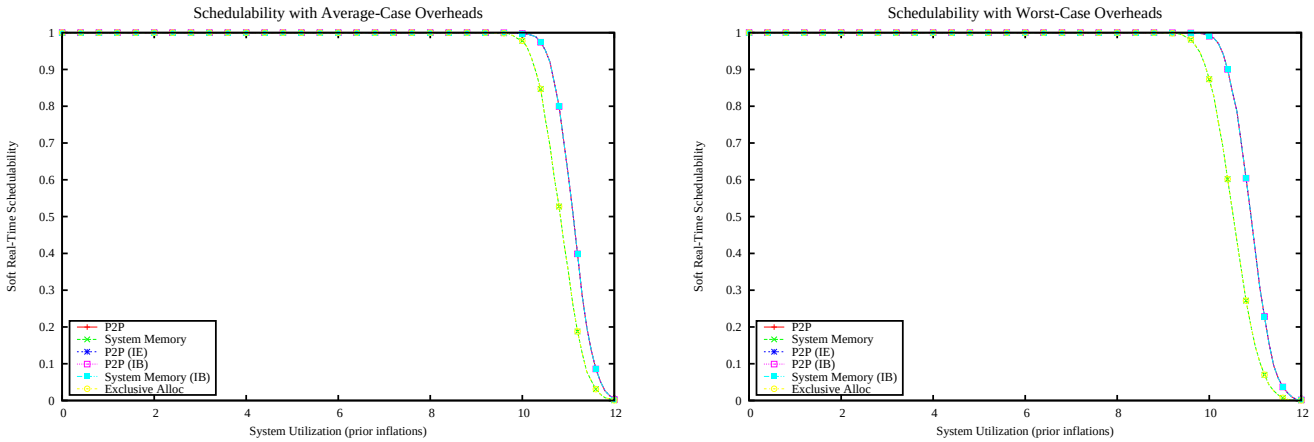

Figure 7037: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

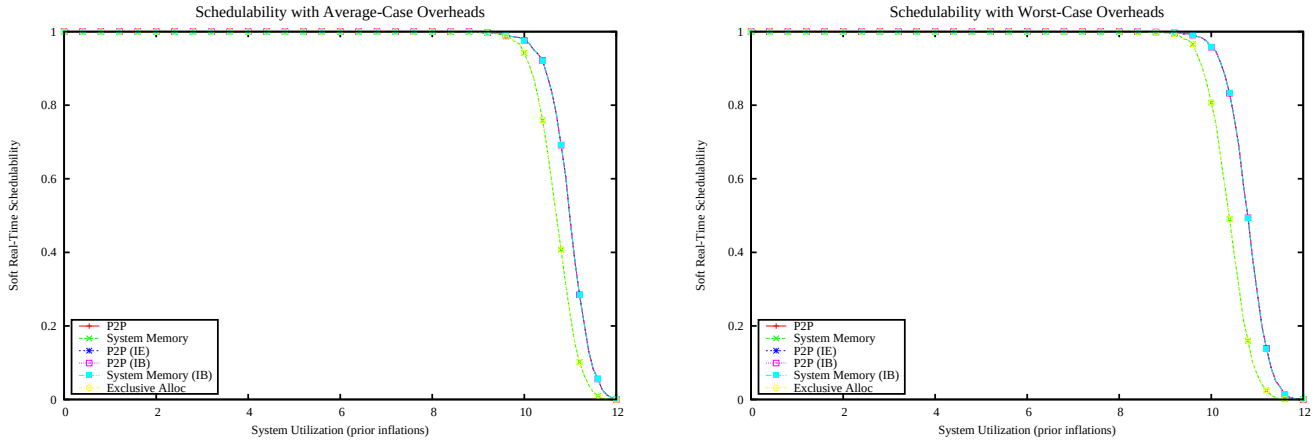

Figure 7038: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

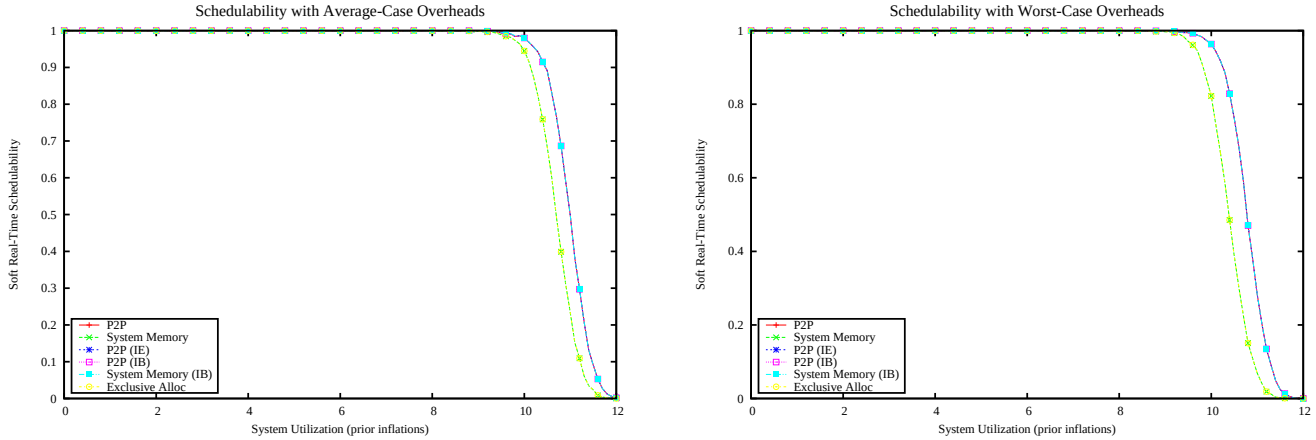

Figure 7039: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

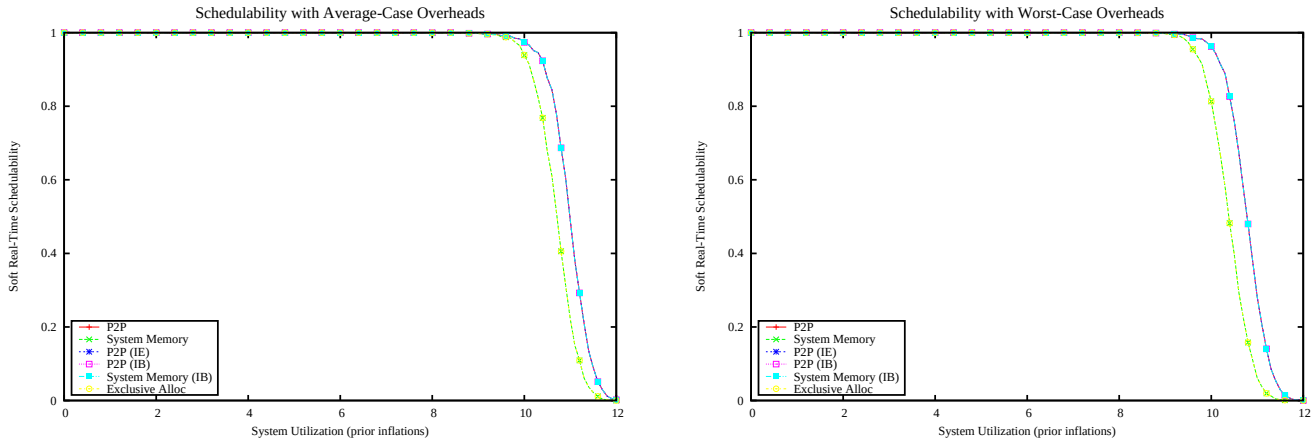

Figure 7040: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

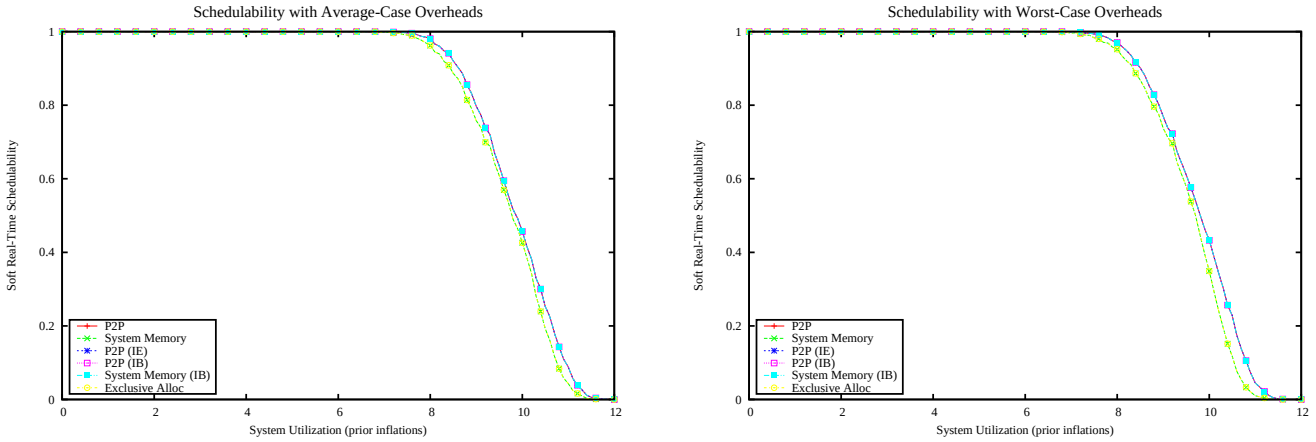

Figure 7041: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

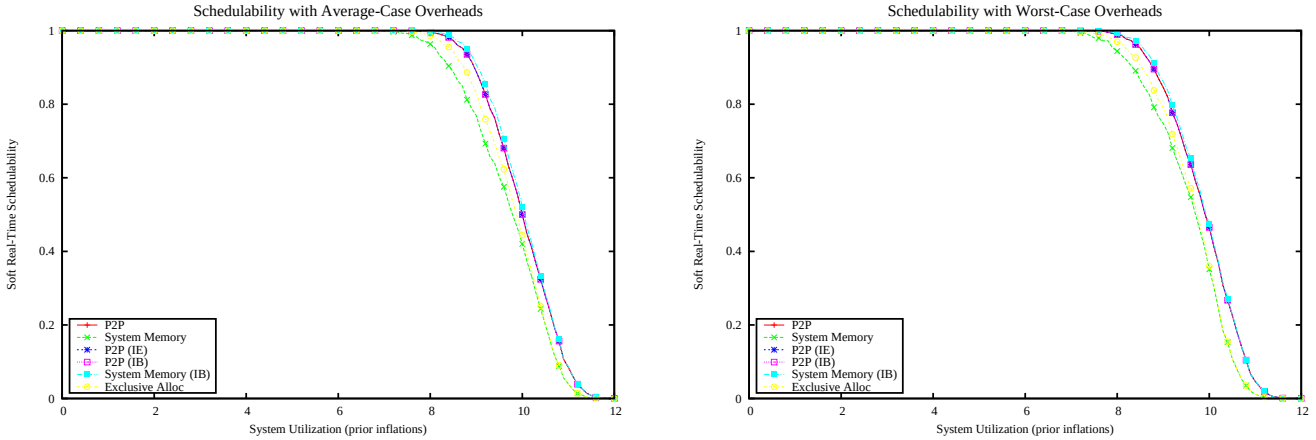

Figure 7042: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

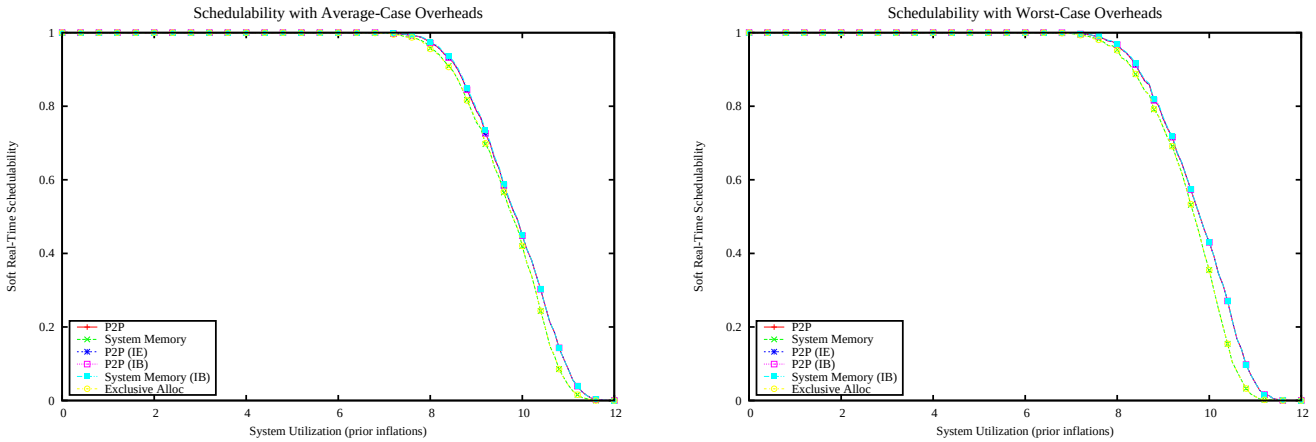

Figure 7043: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

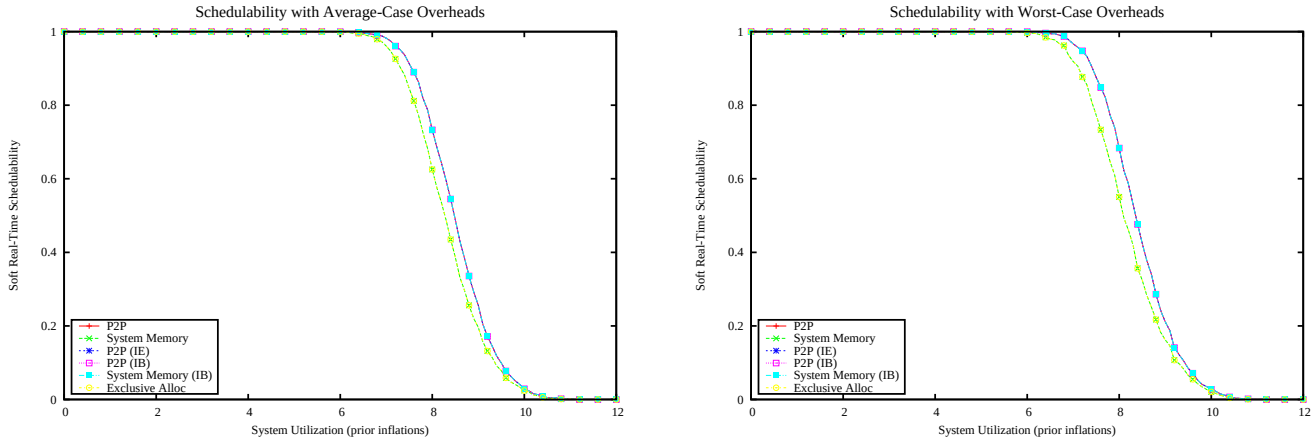

Figure 7044: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

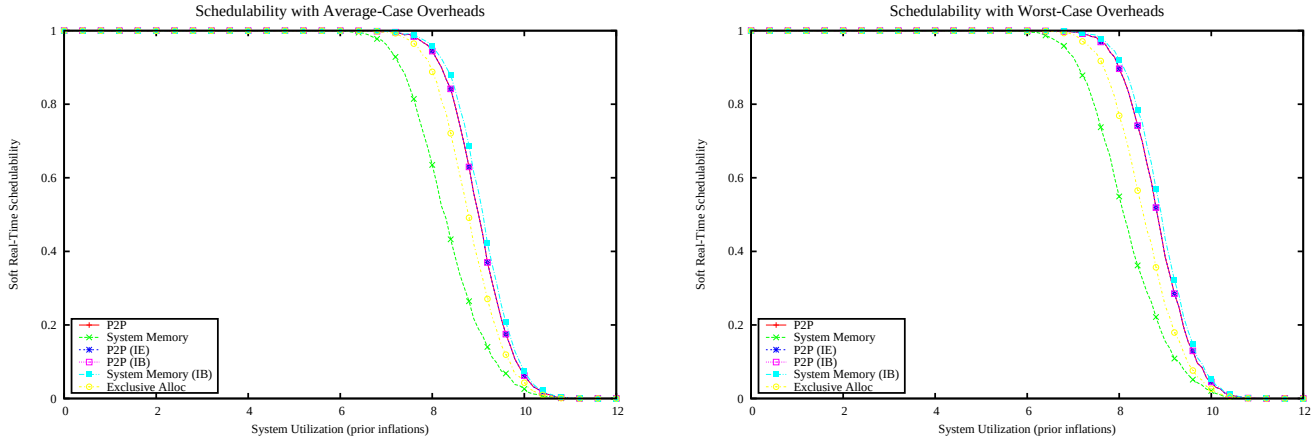

Figure 7045: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

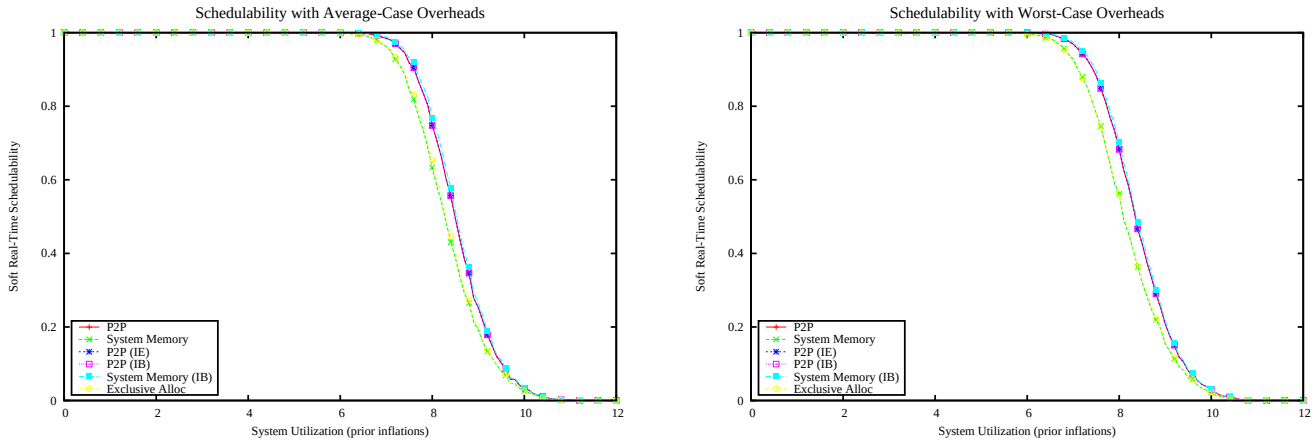

Figure 7046: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

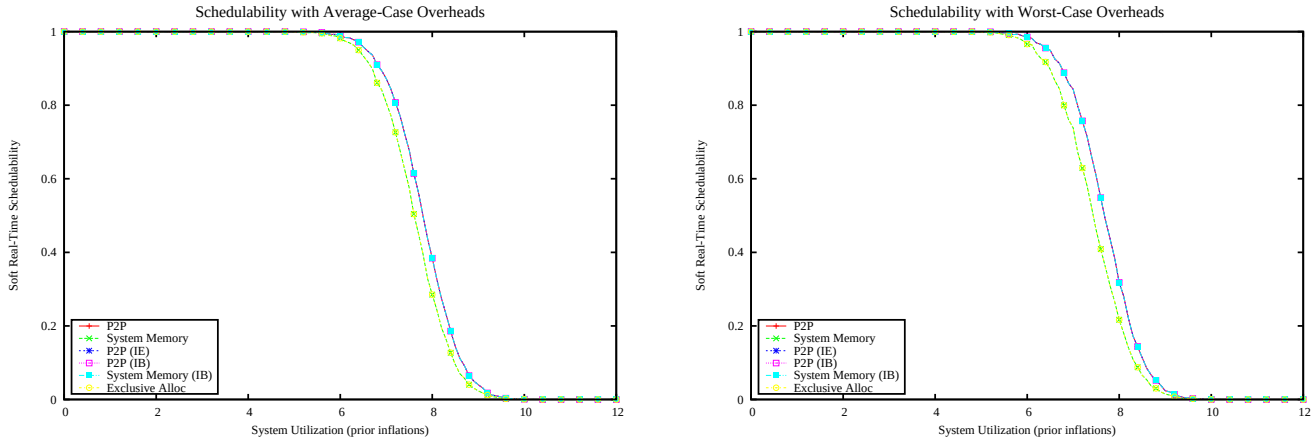

Figure 7047: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

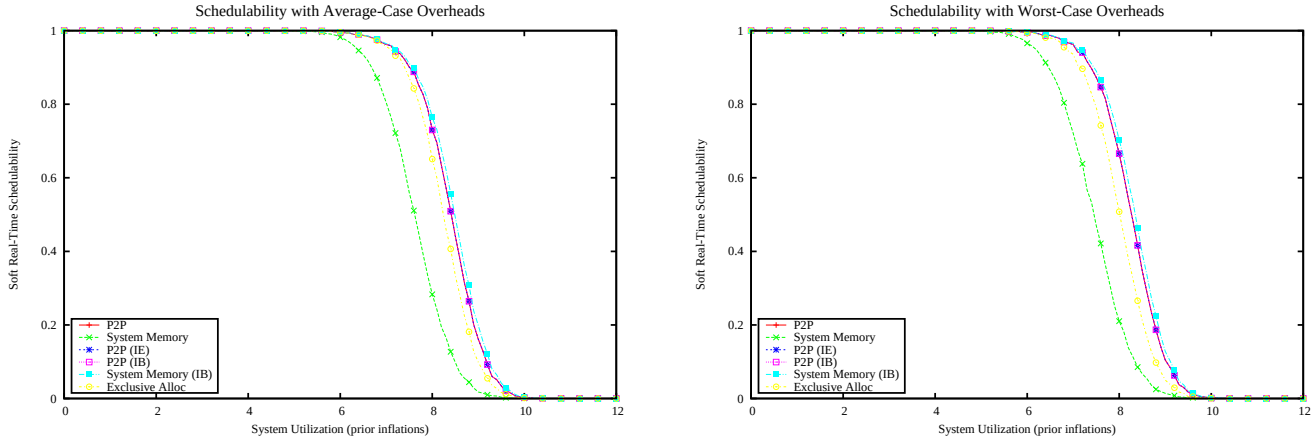

Figure 7048: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

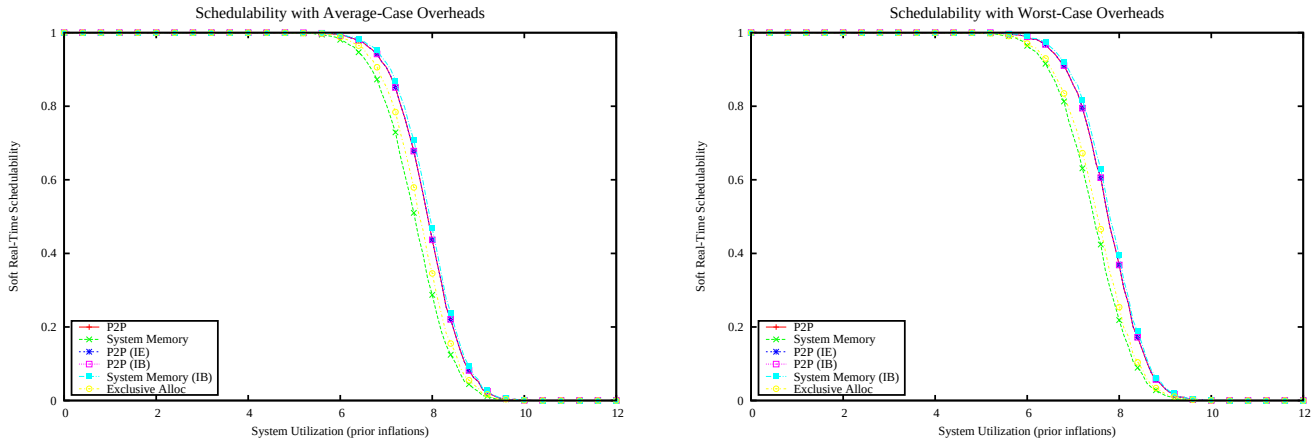

Figure 7049: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

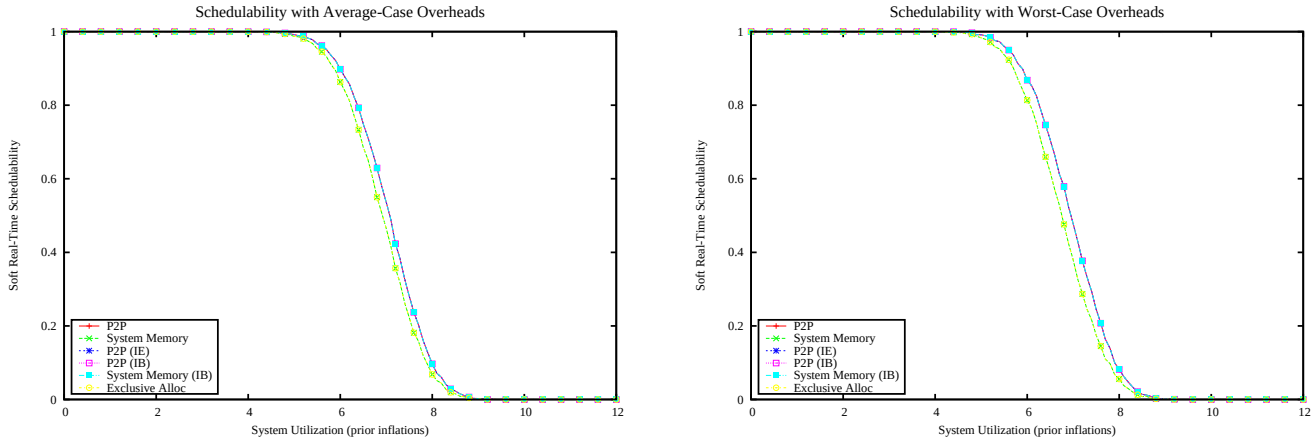

Figure 7050: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

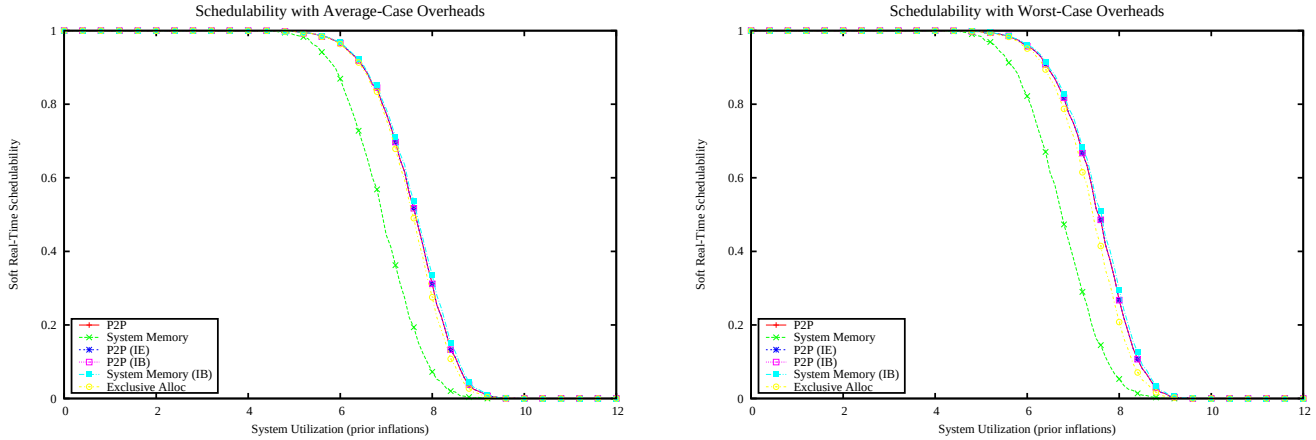

Figure 7051: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

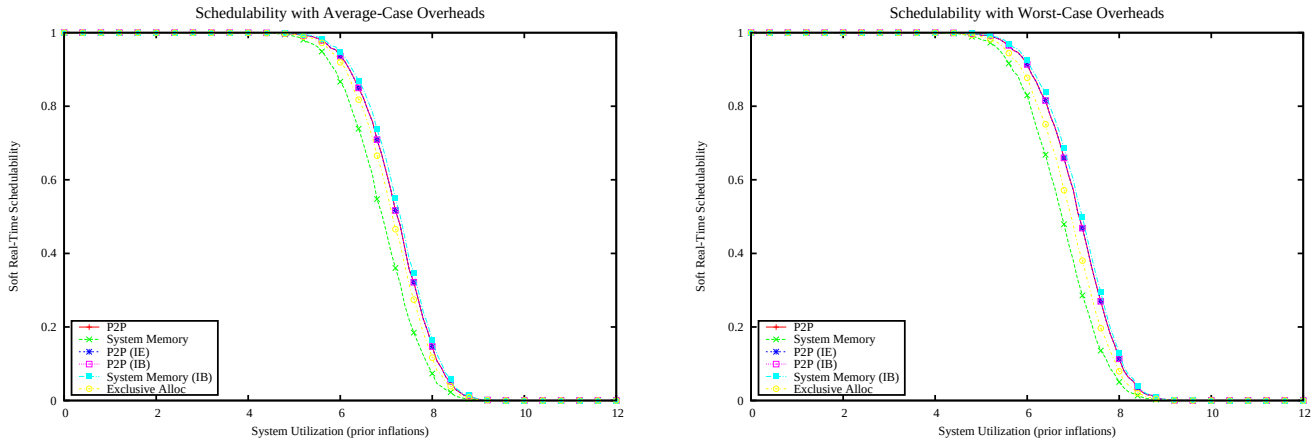

Figure 7052: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

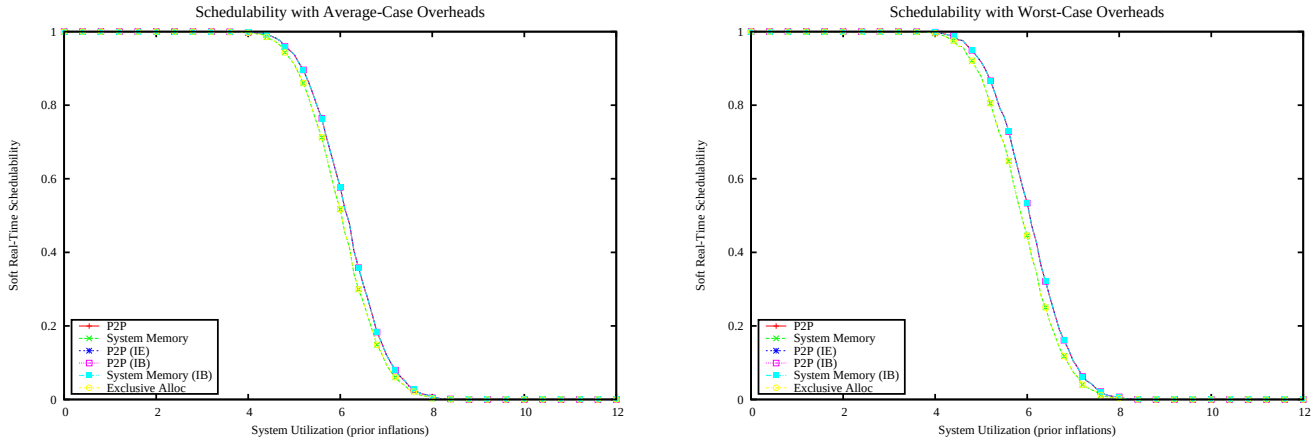

Figure 7053: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

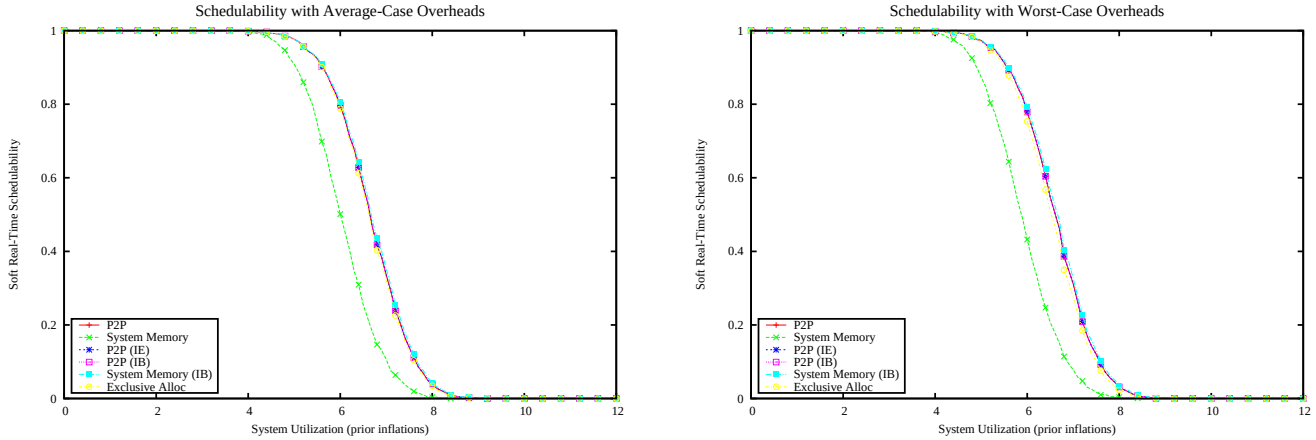

Figure 7054: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

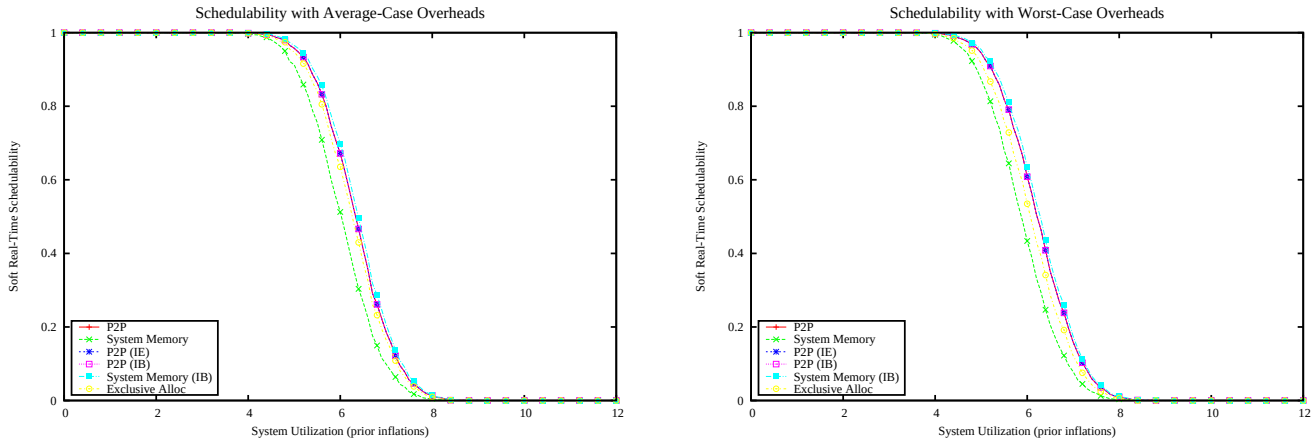

Figure 7055: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

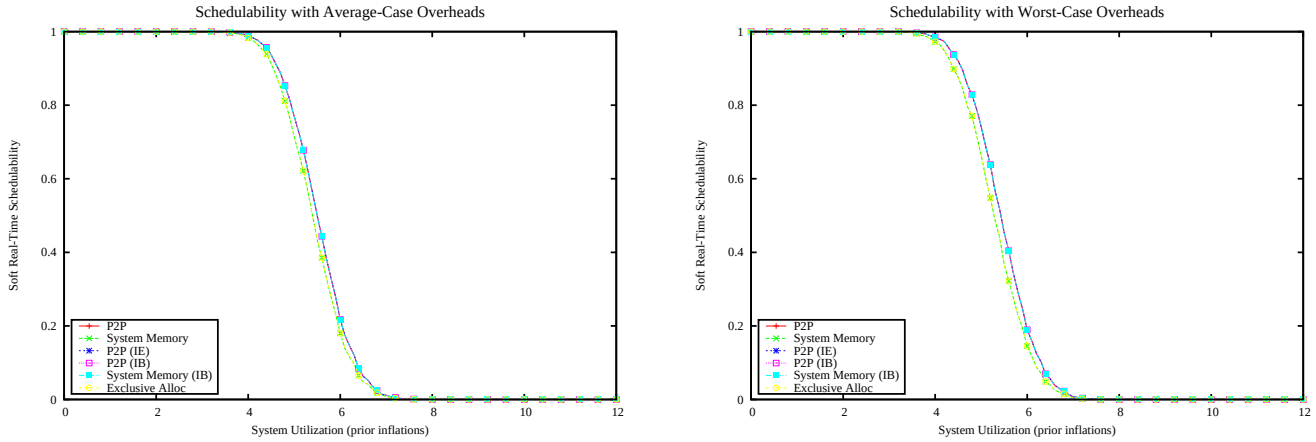

Figure 7056: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

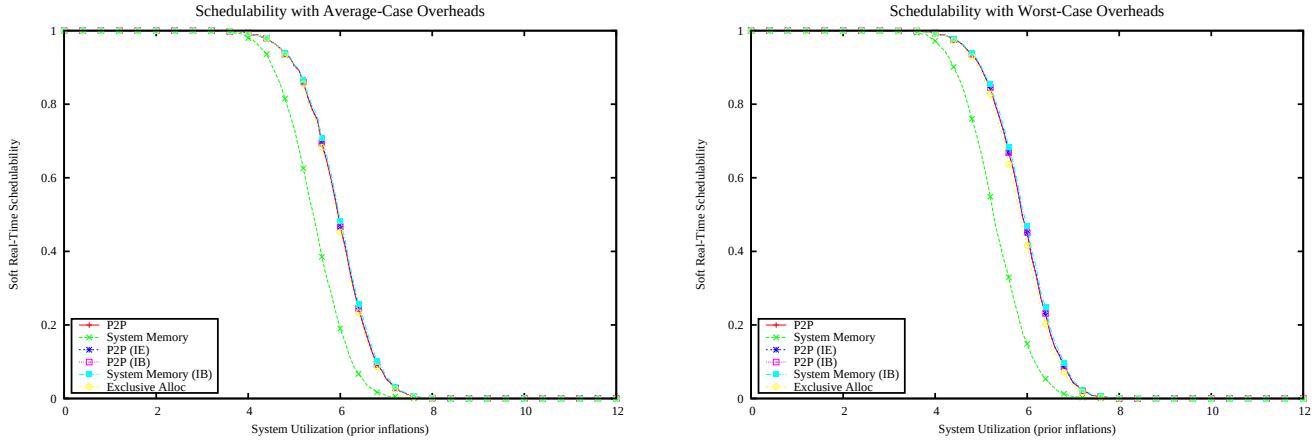

Figure 7057: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

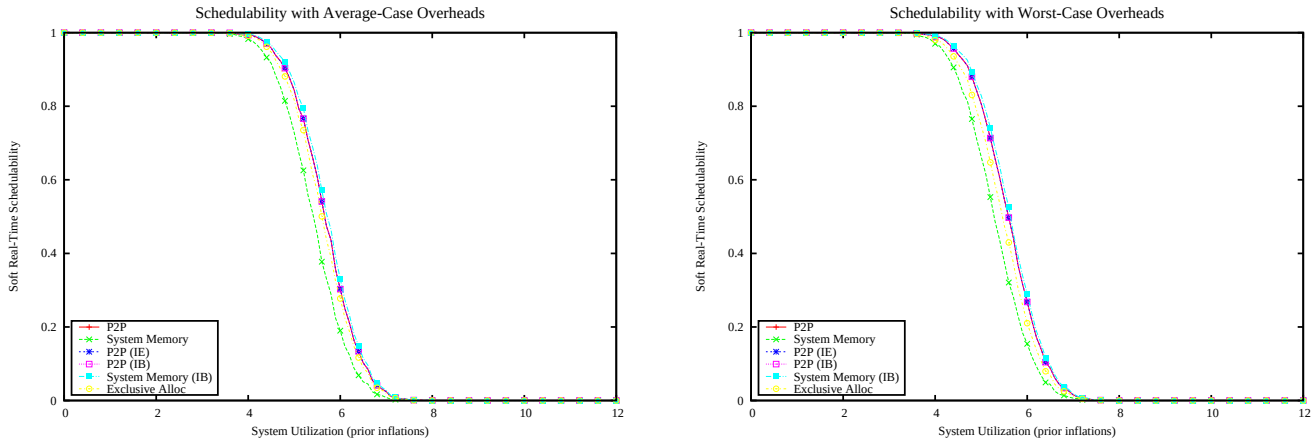

Figure 7058: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

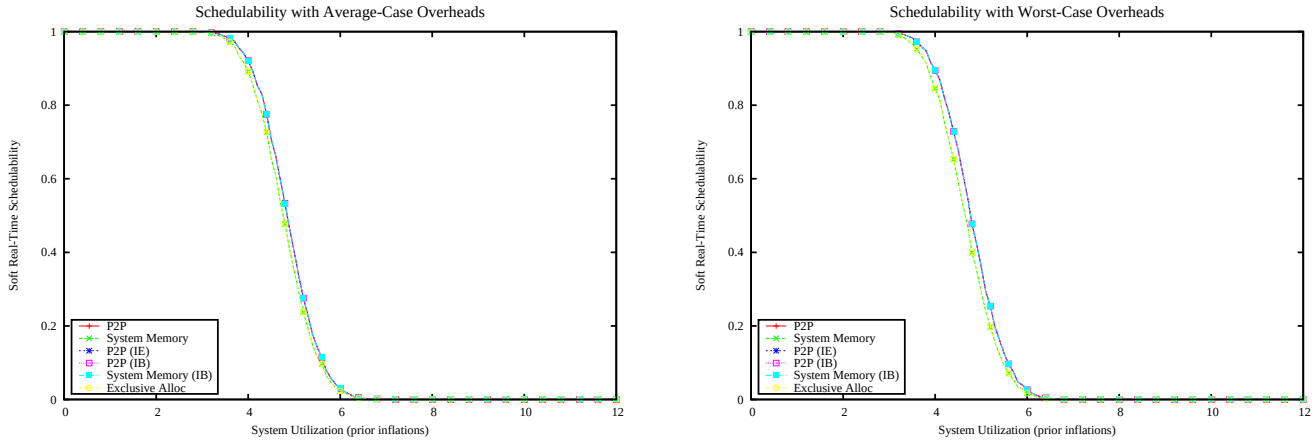

Figure 7059: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

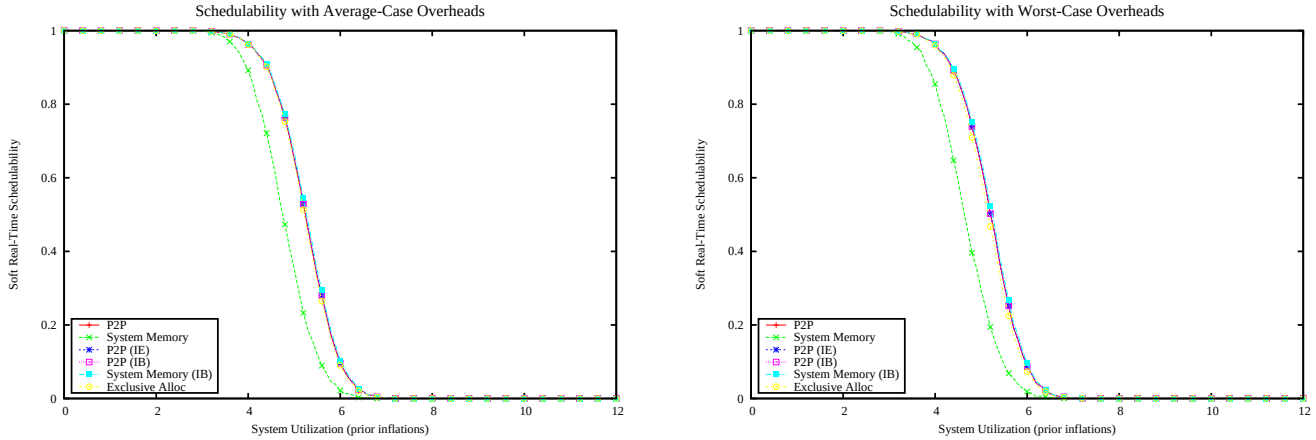

Figure 7060: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

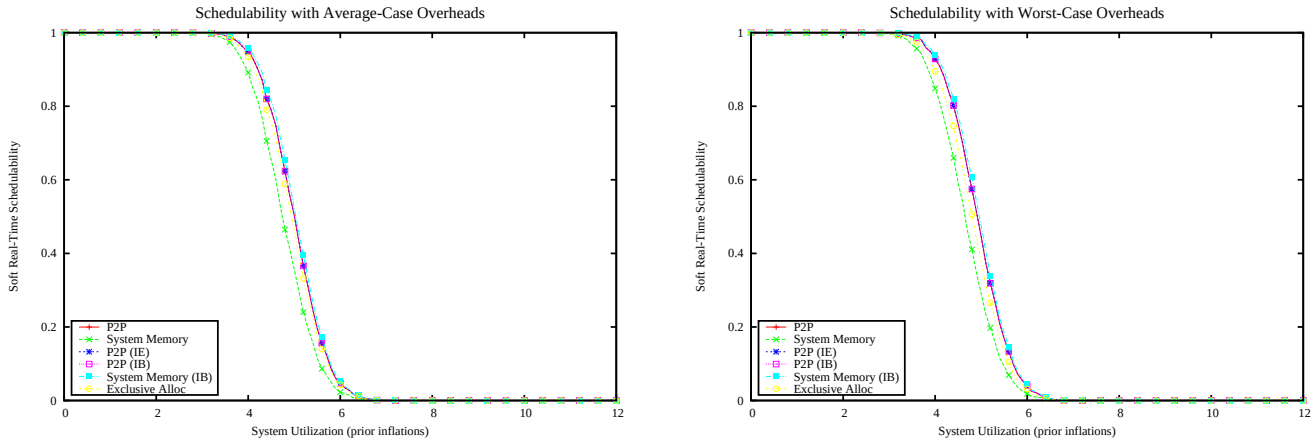

Figure 7061: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

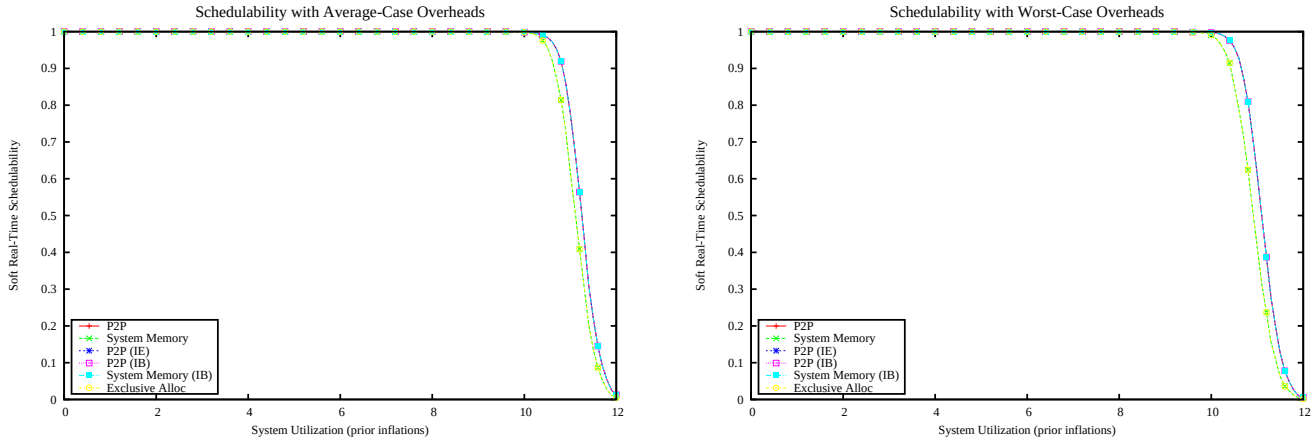

Figure 7062: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

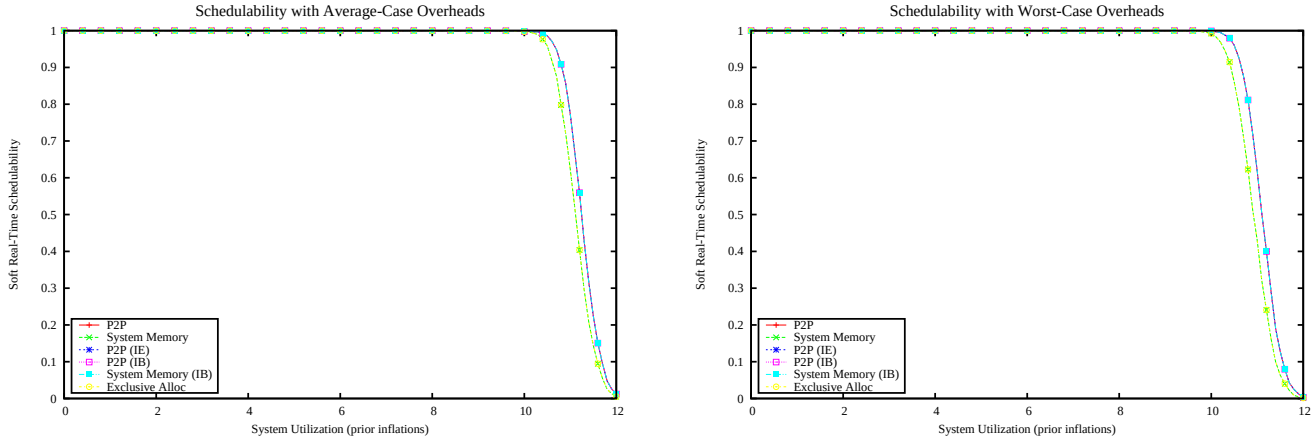

Figure 7063: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

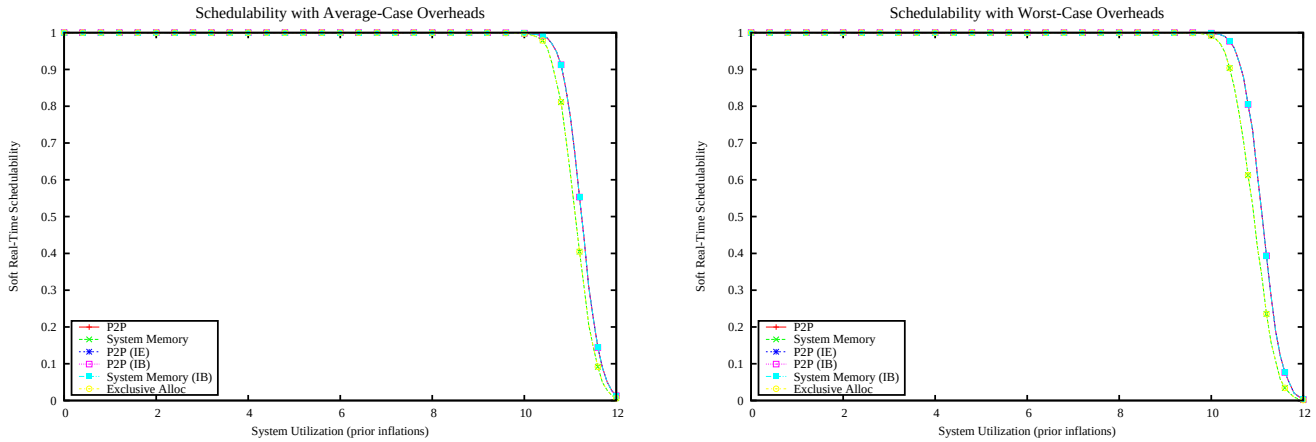

Figure 7064: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

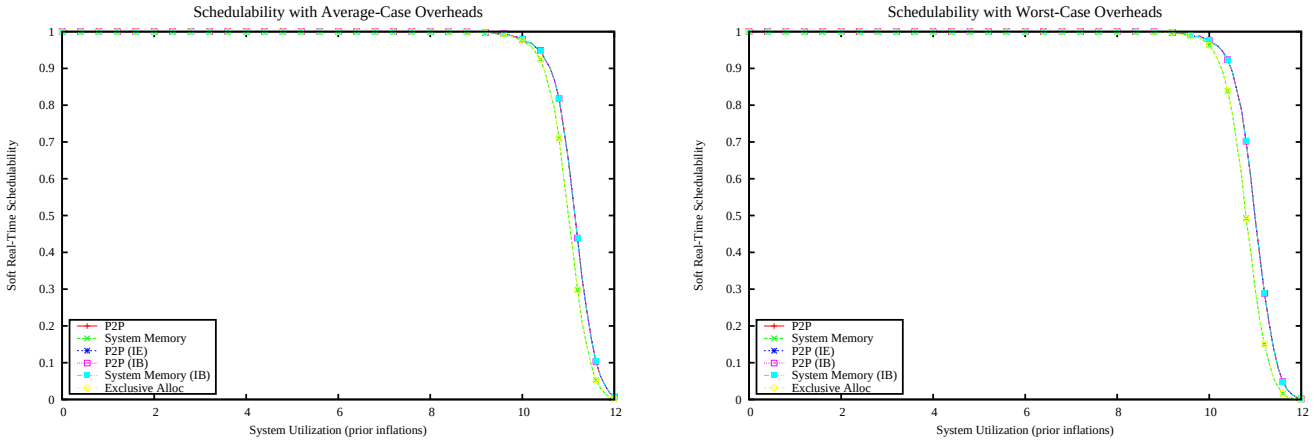

Figure 7065: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

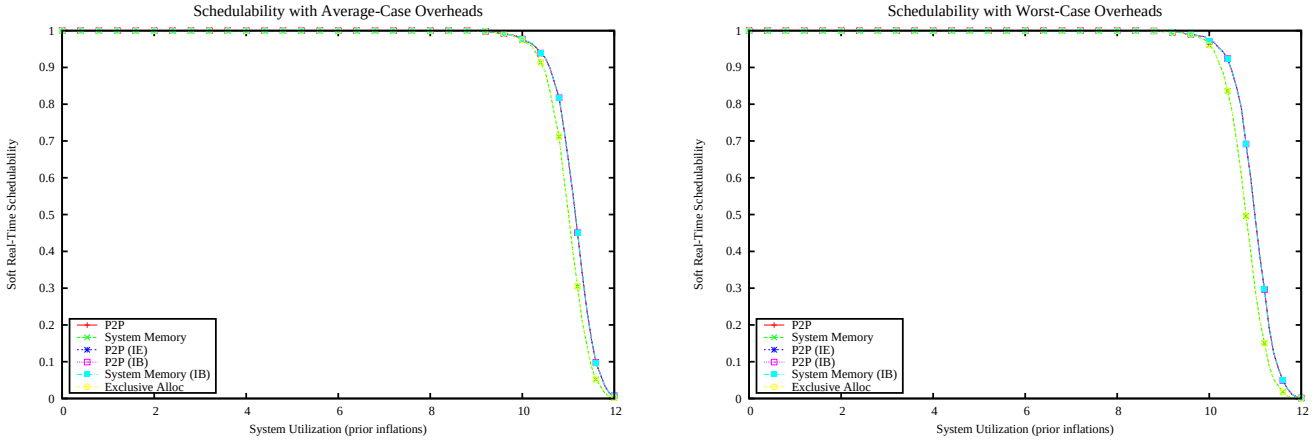

Figure 7066: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

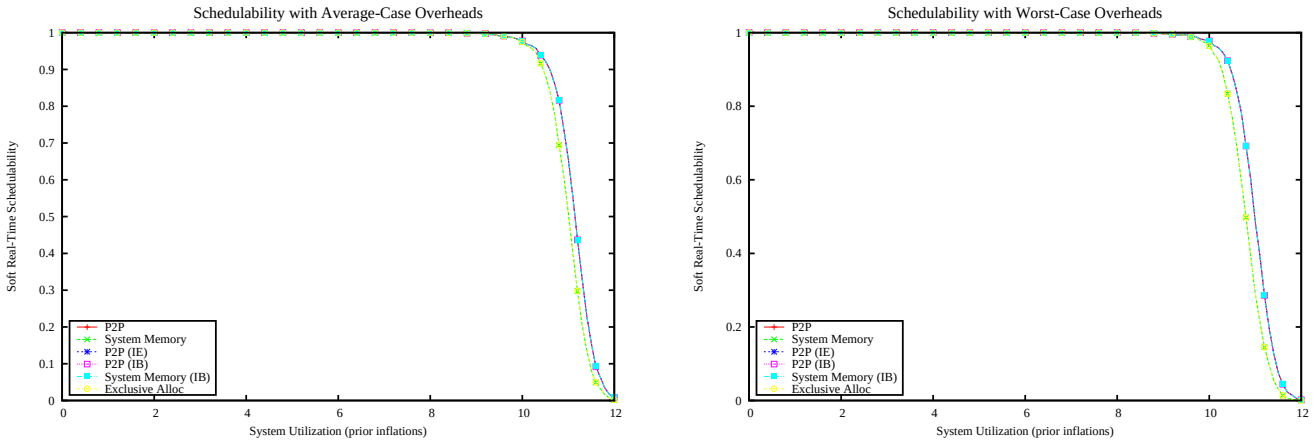

Figure 7067: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

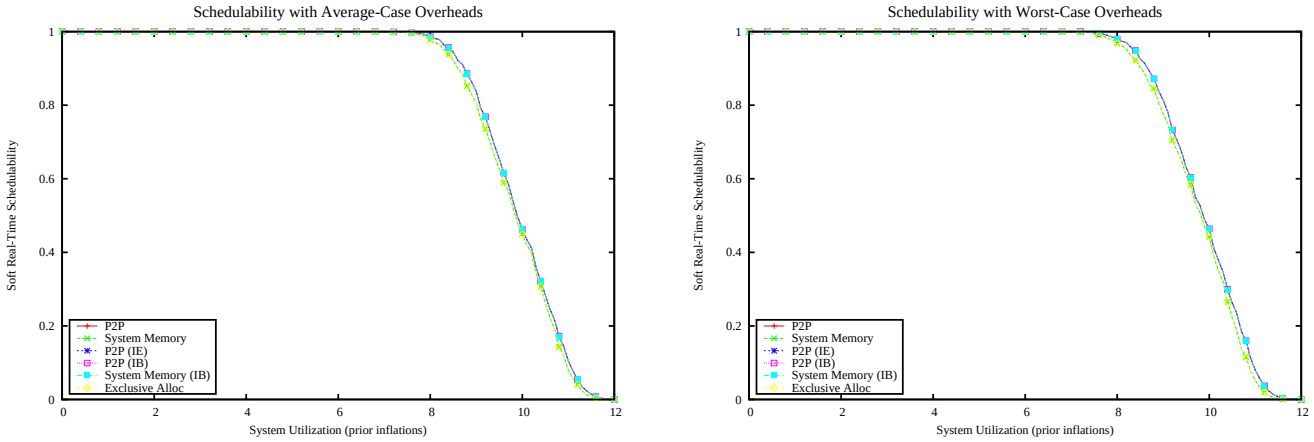

Figure 7068: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

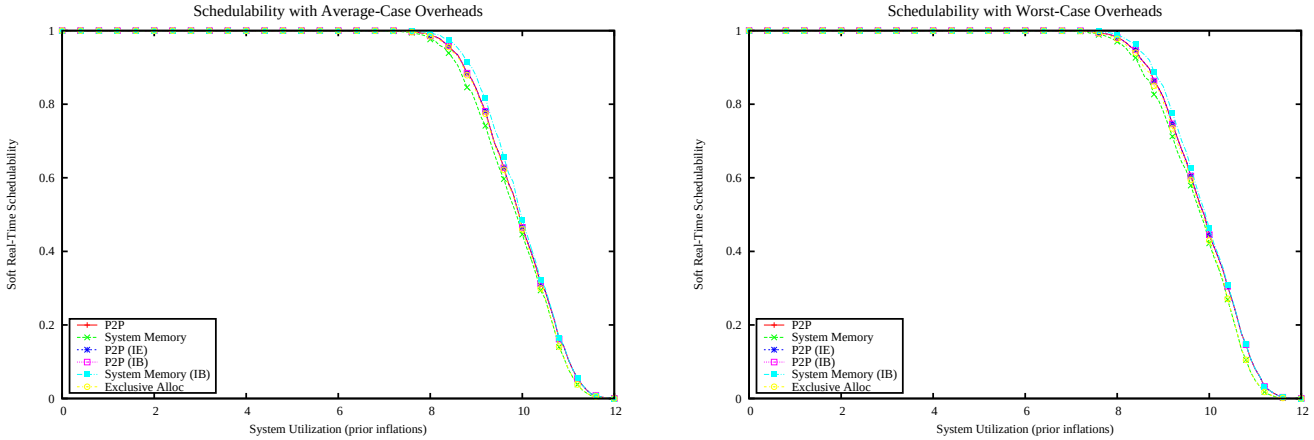

Figure 7069: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

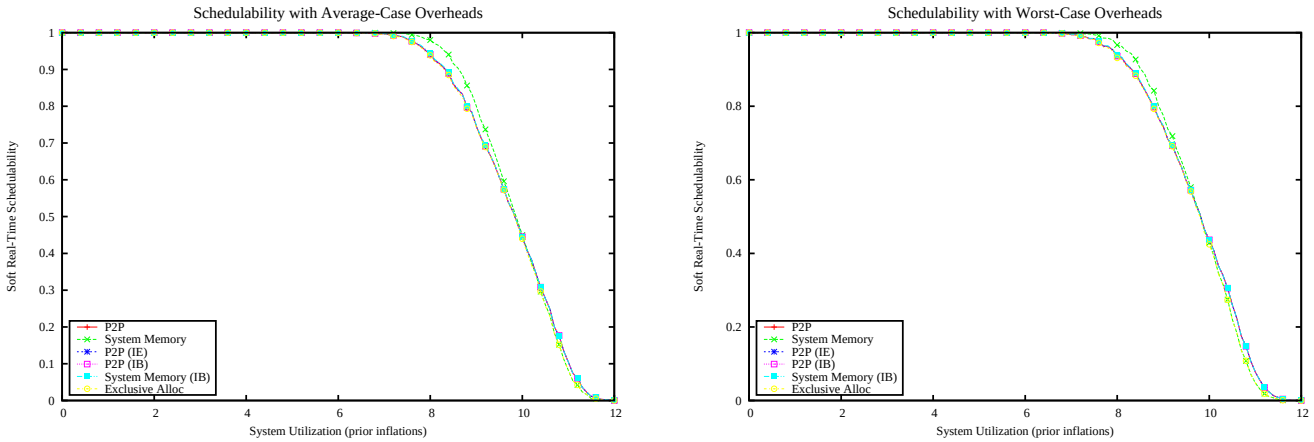

Figure 7070: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

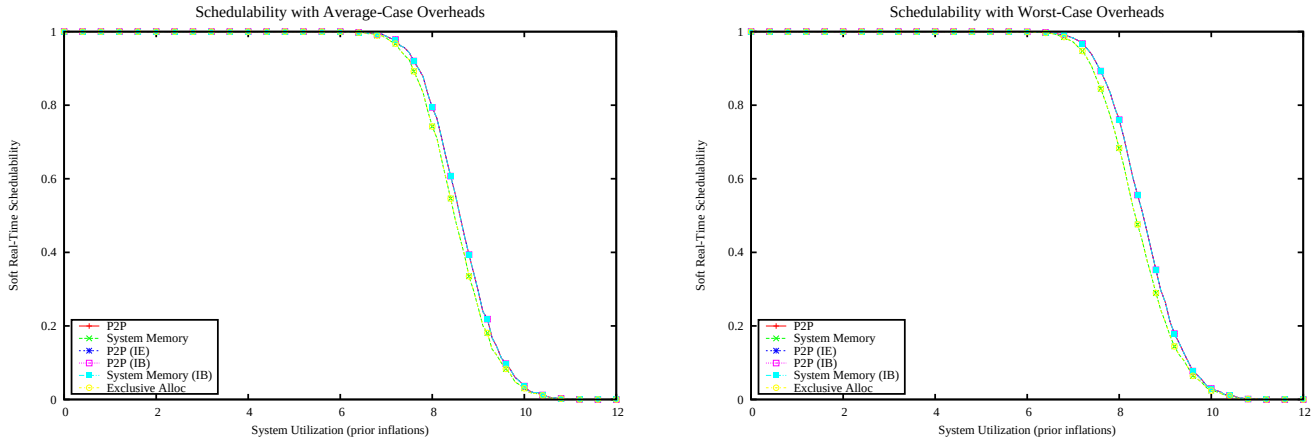

Figure 7071: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

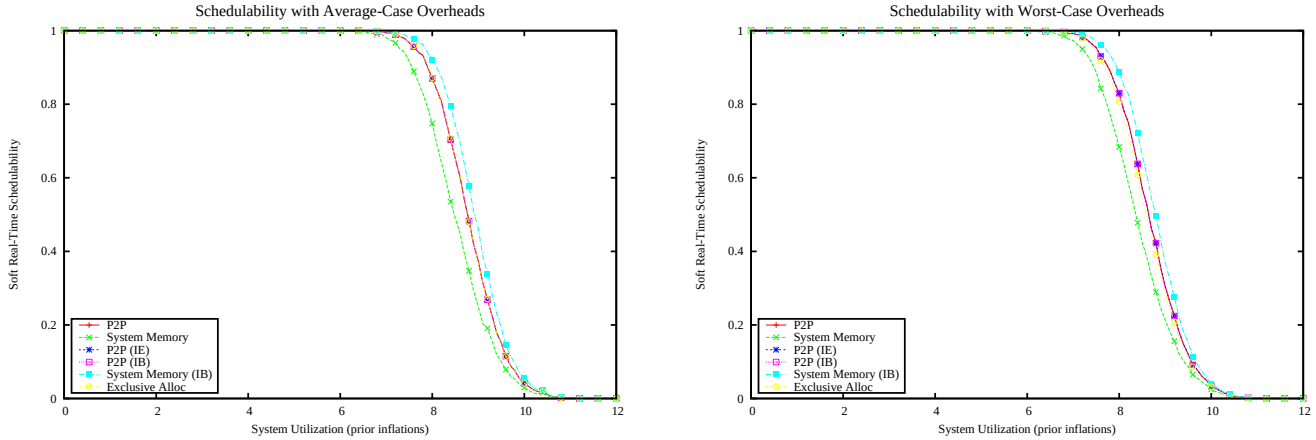

Figure 7072: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

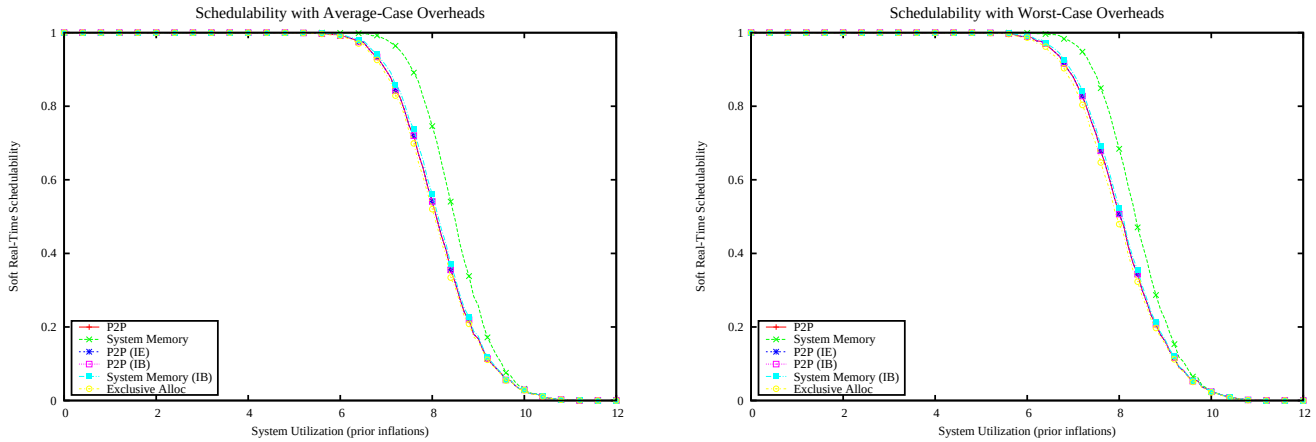

Figure 7073: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

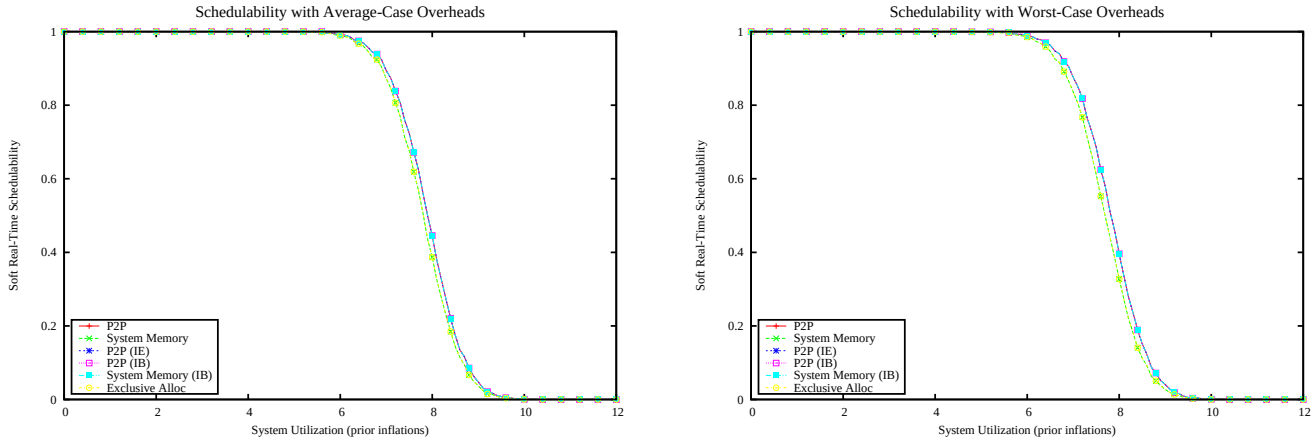

Figure 7074: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

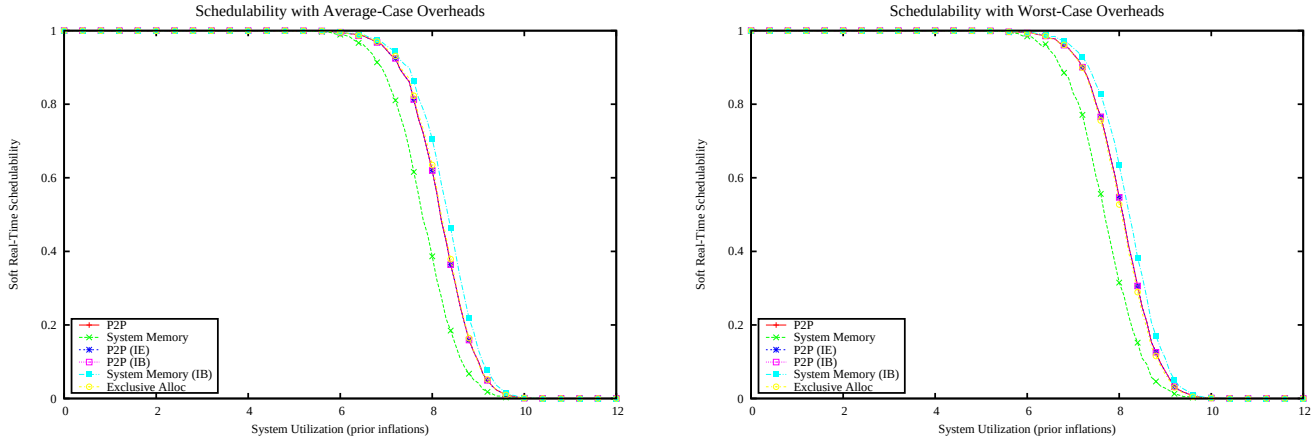

Figure 7075: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

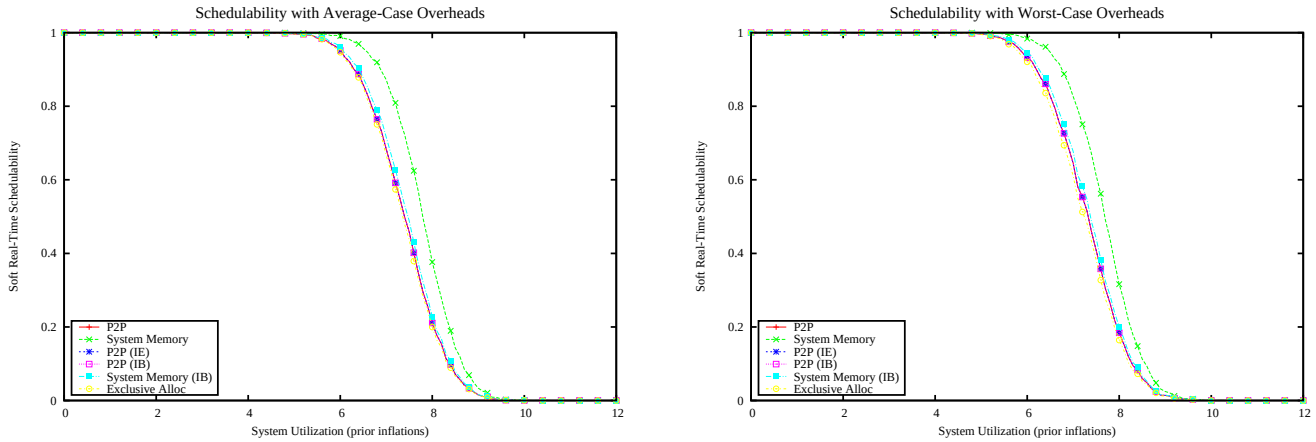

Figure 7076: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

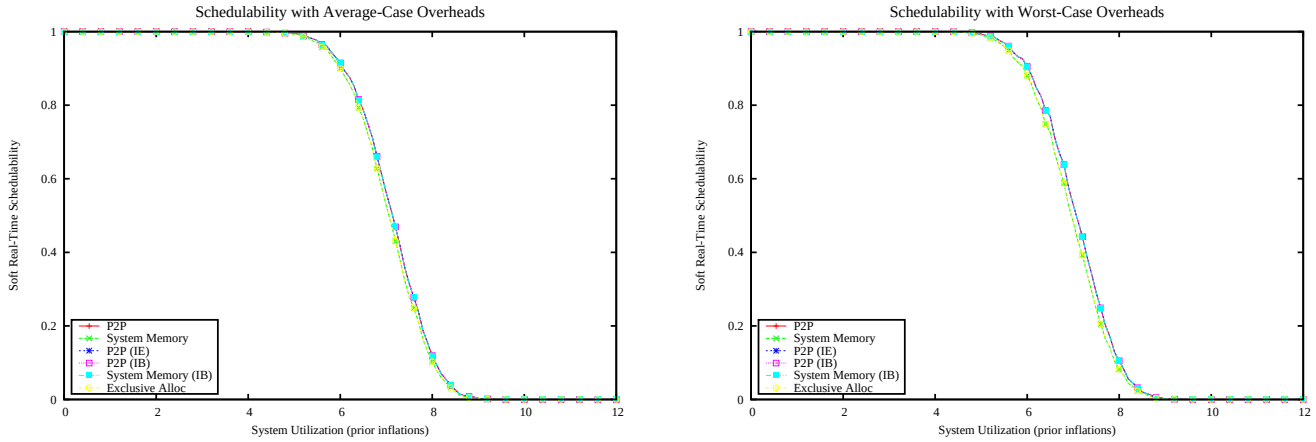

Figure 7077: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

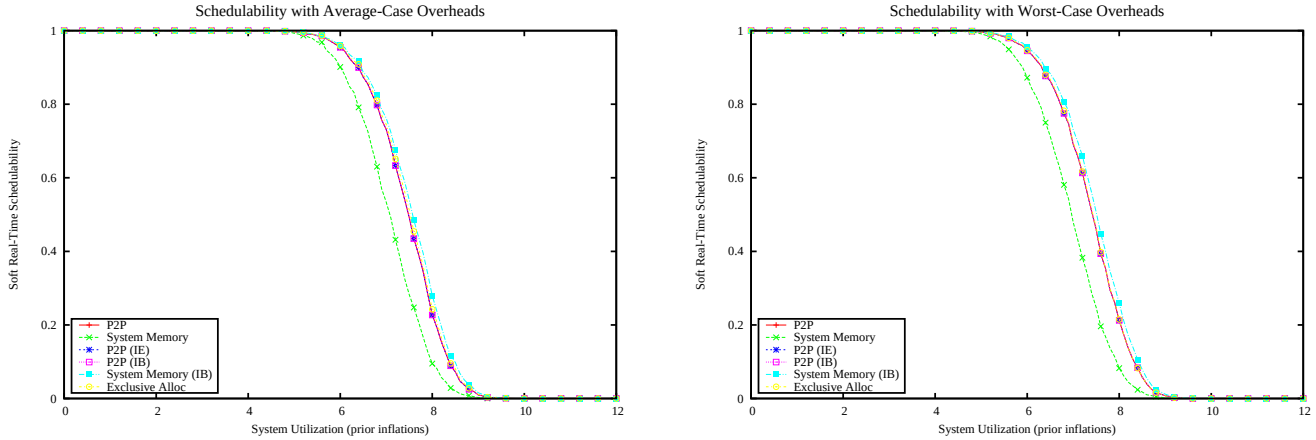

Figure 7078: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

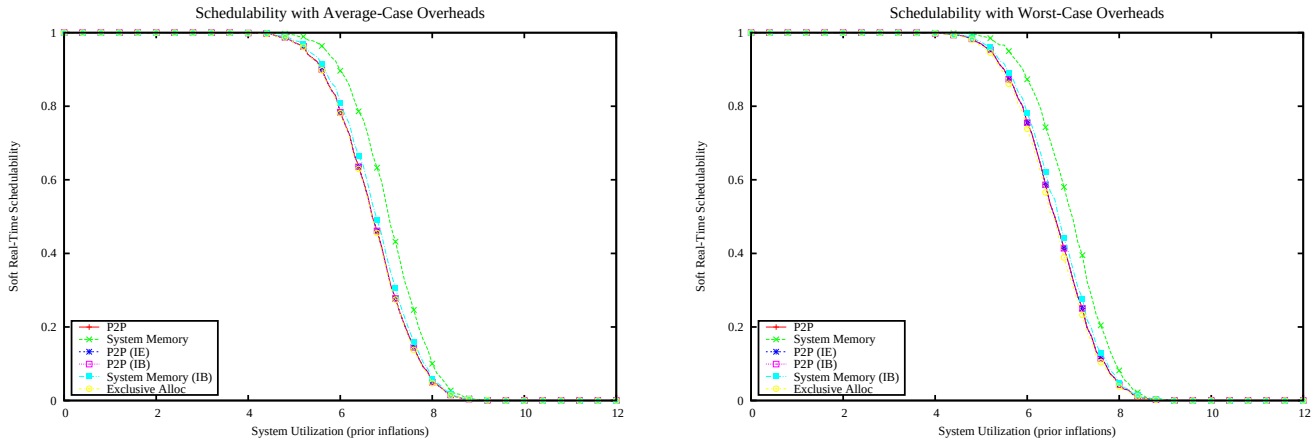

Figure 7079: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

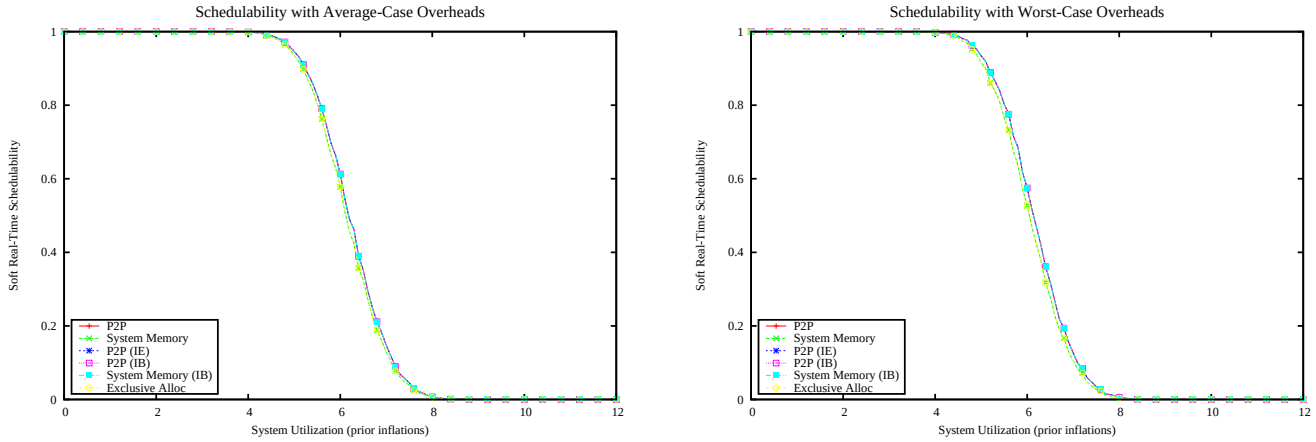

Figure 7080: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

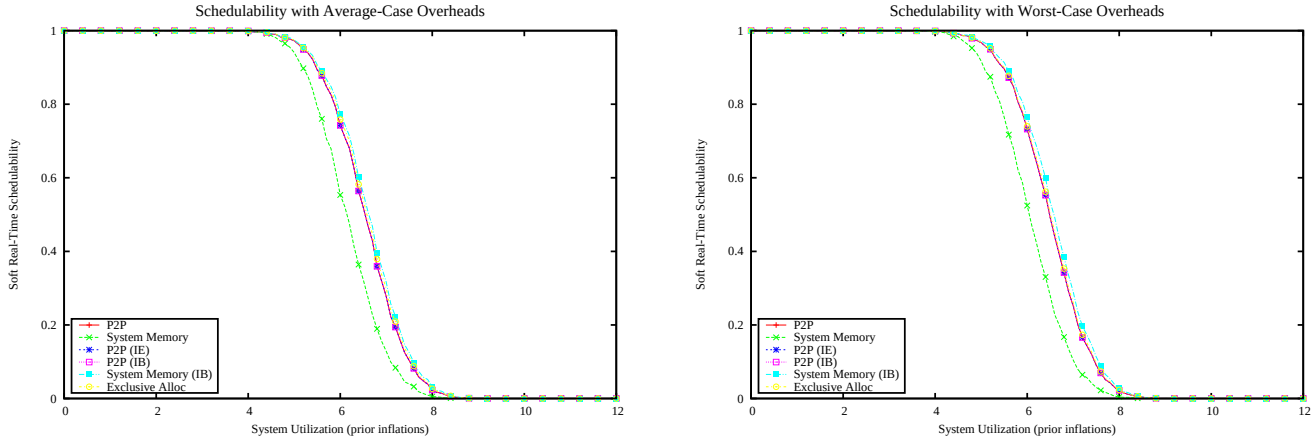

Figure 7081: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

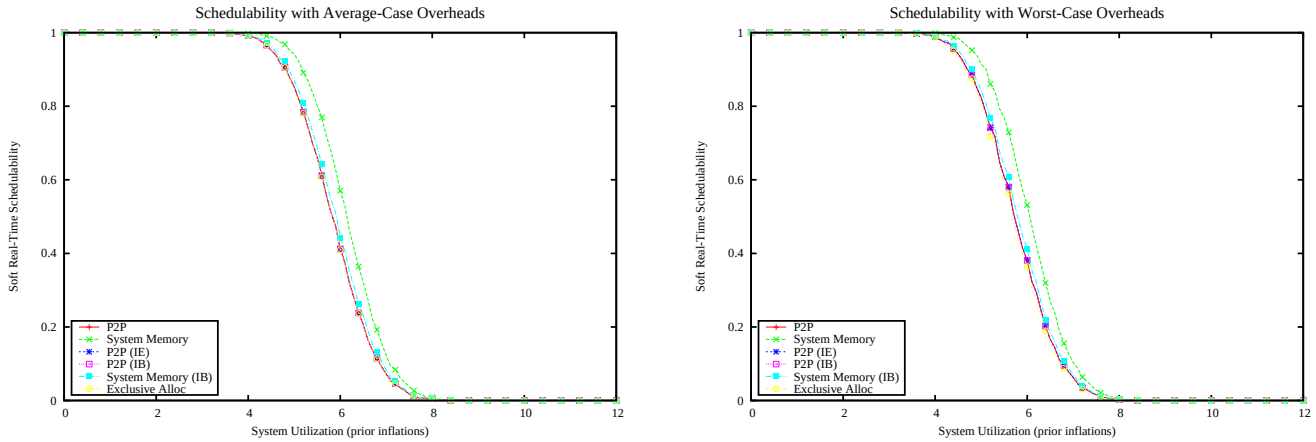

Figure 7082: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

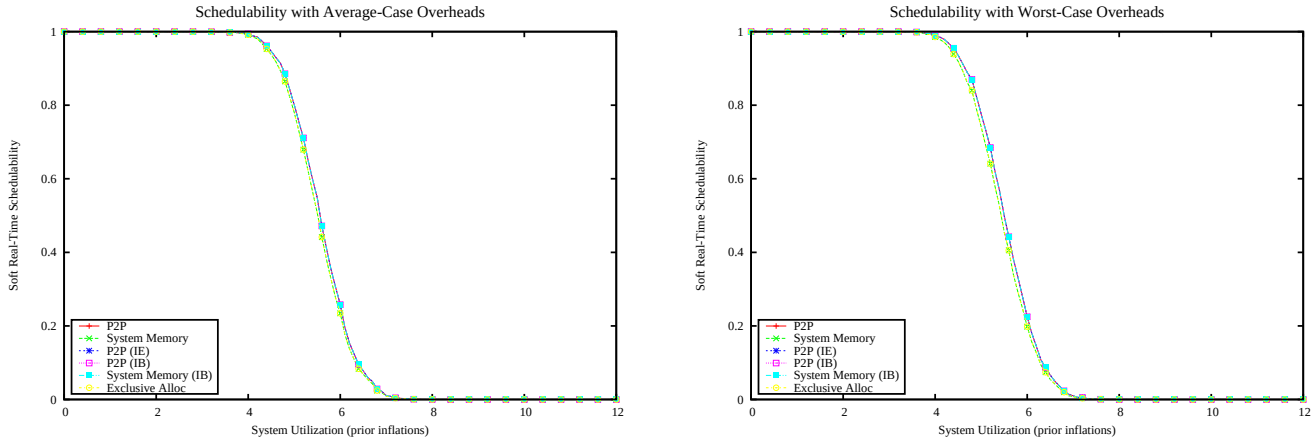

Figure 7083: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

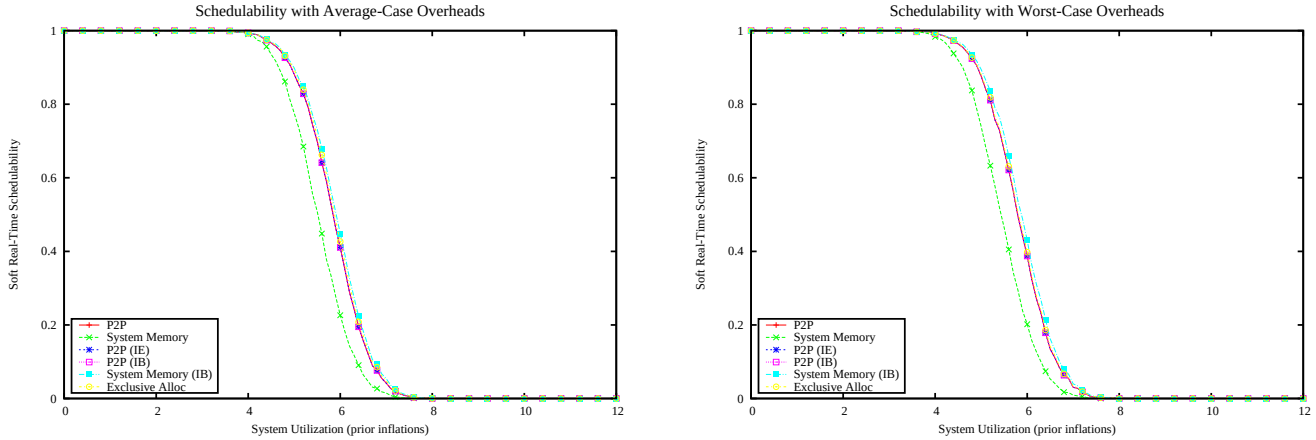

Figure 7084: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

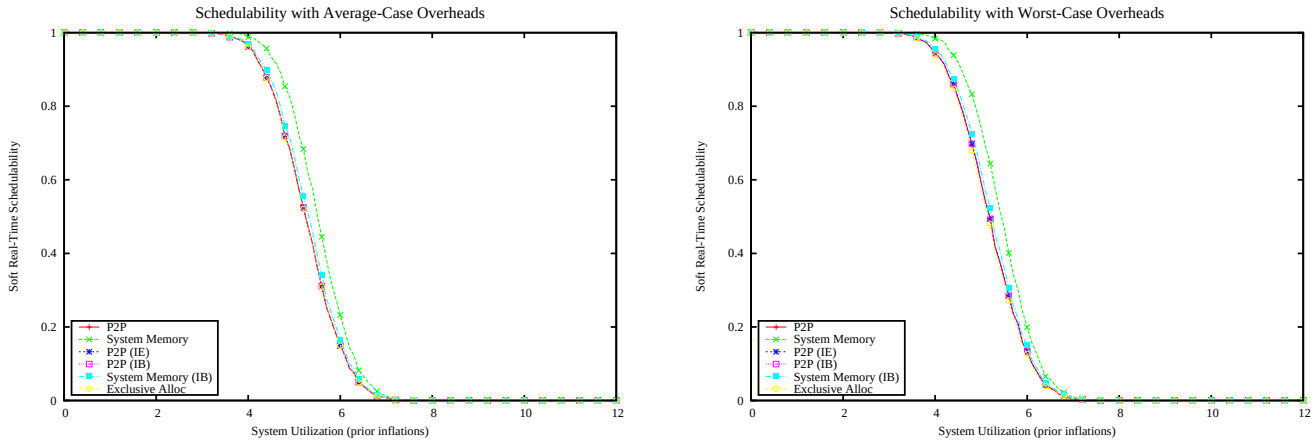

Figure 7085: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

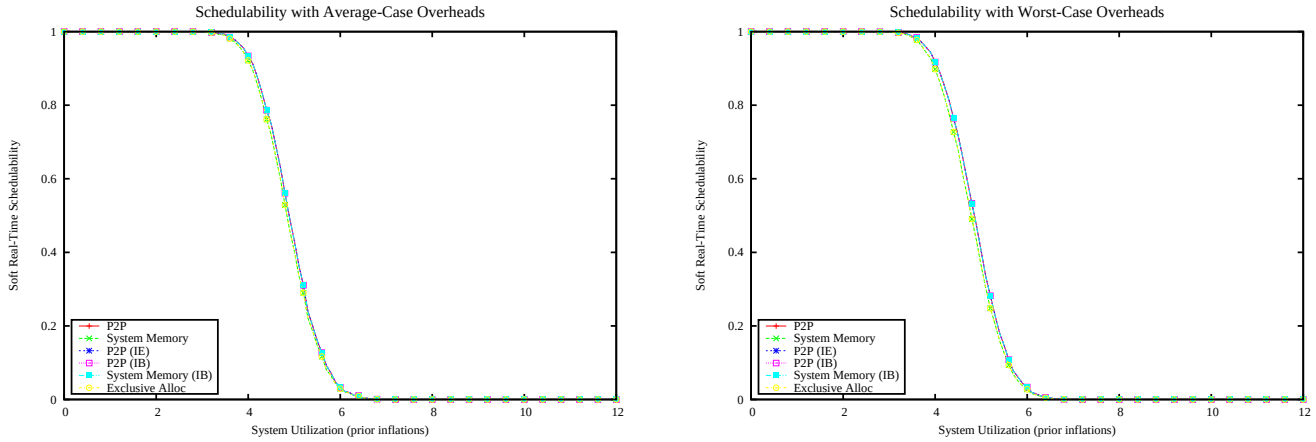

Figure 7086: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

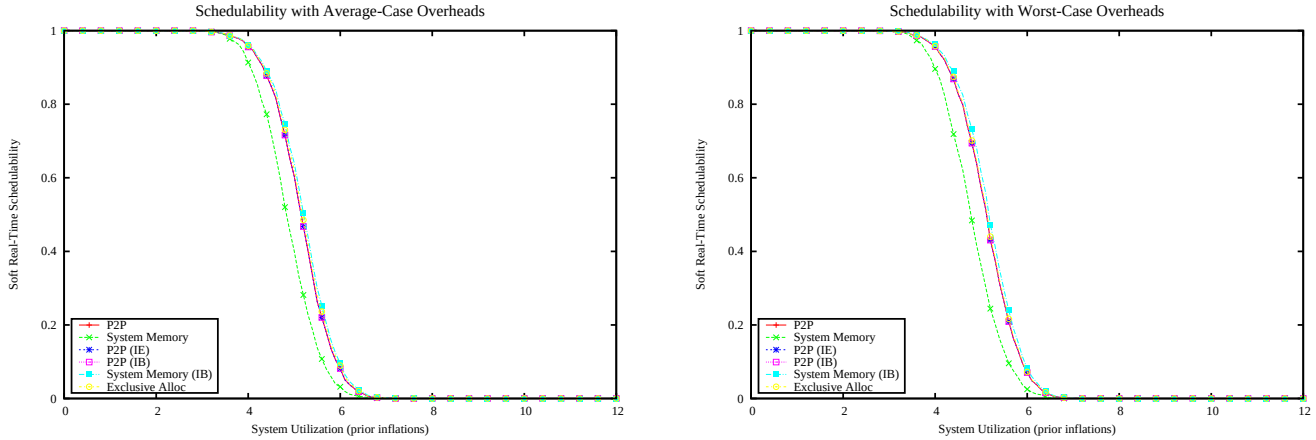

Figure 7087: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

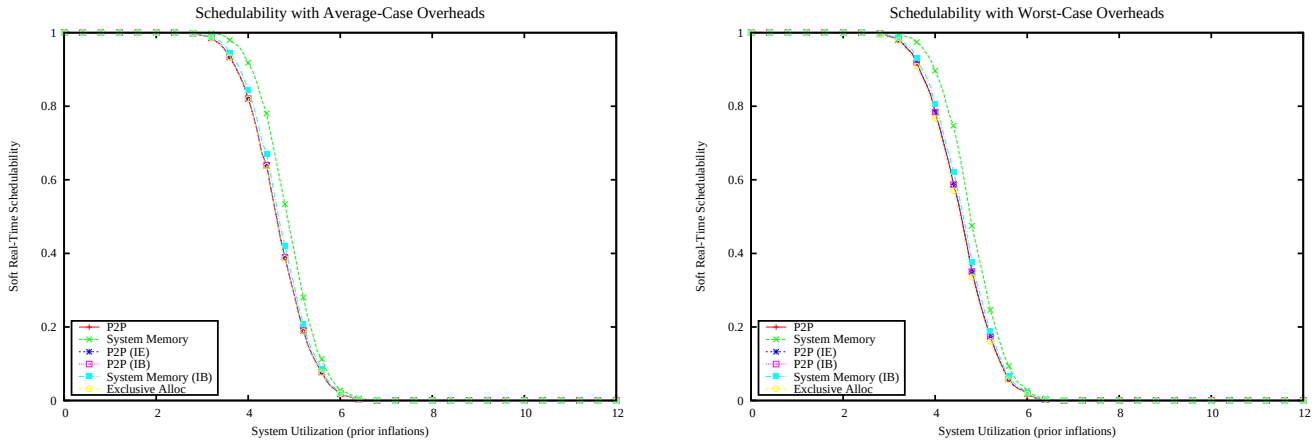

Figure 7088: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

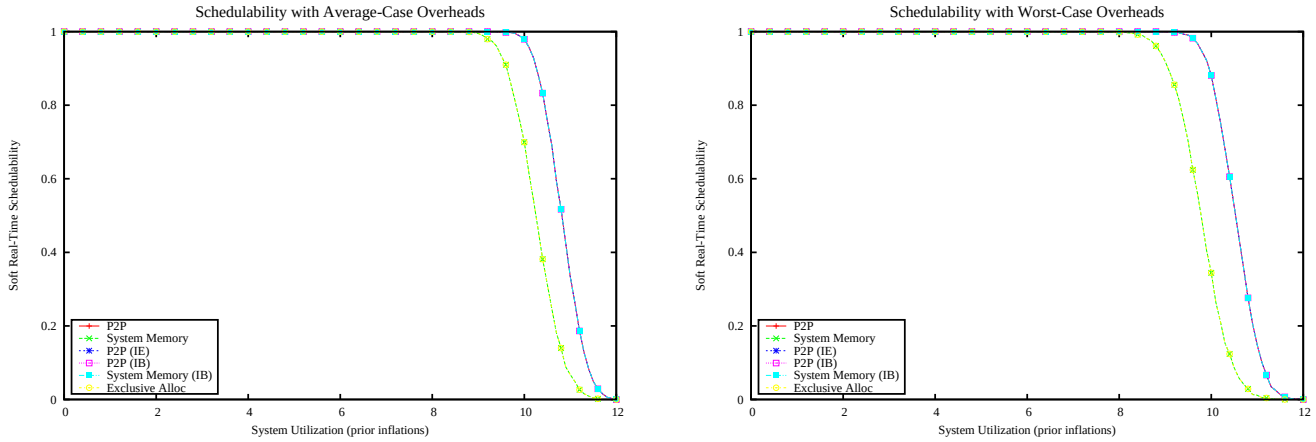

Figure 7089: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

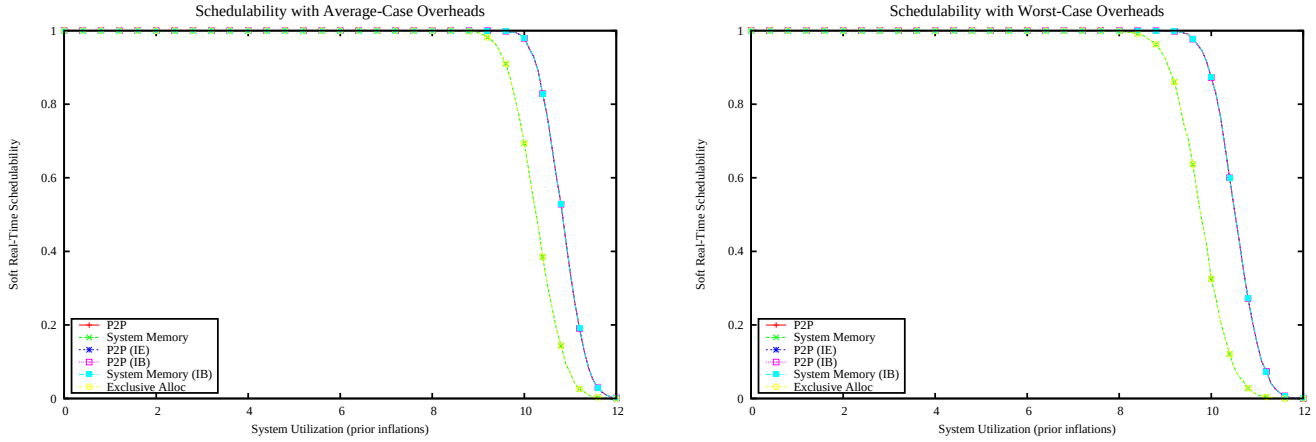

Figure 7090: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

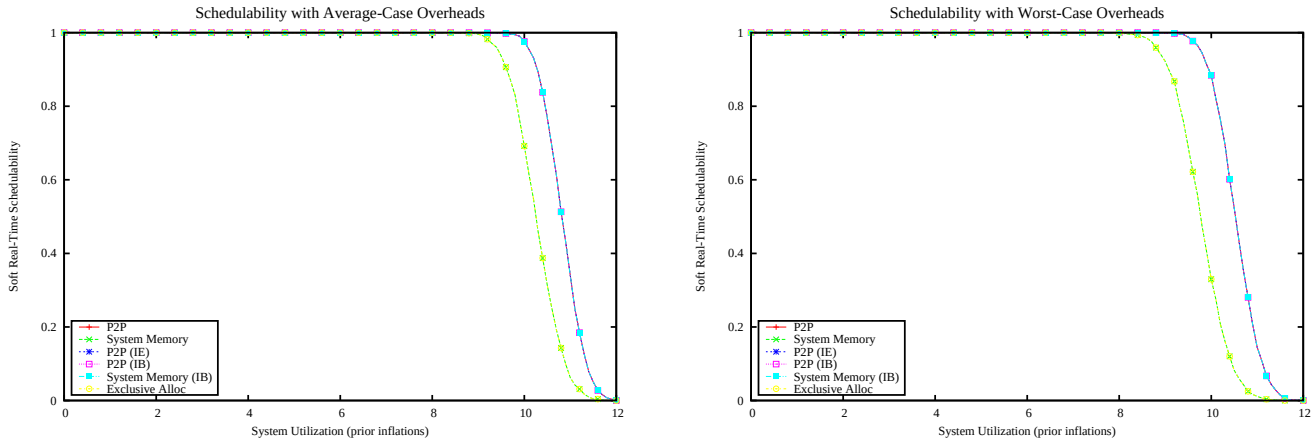

Figure 7091: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

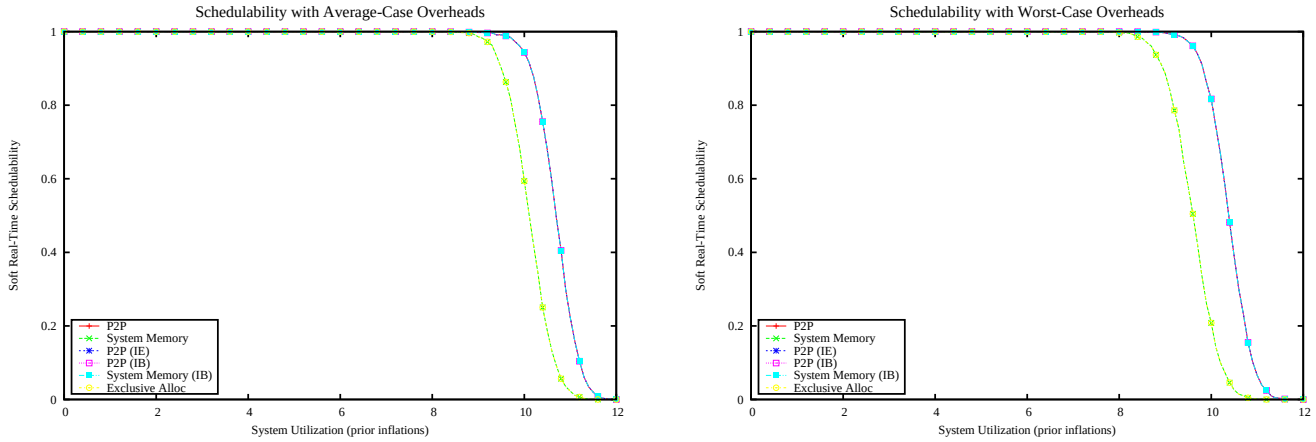

Figure 7092: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

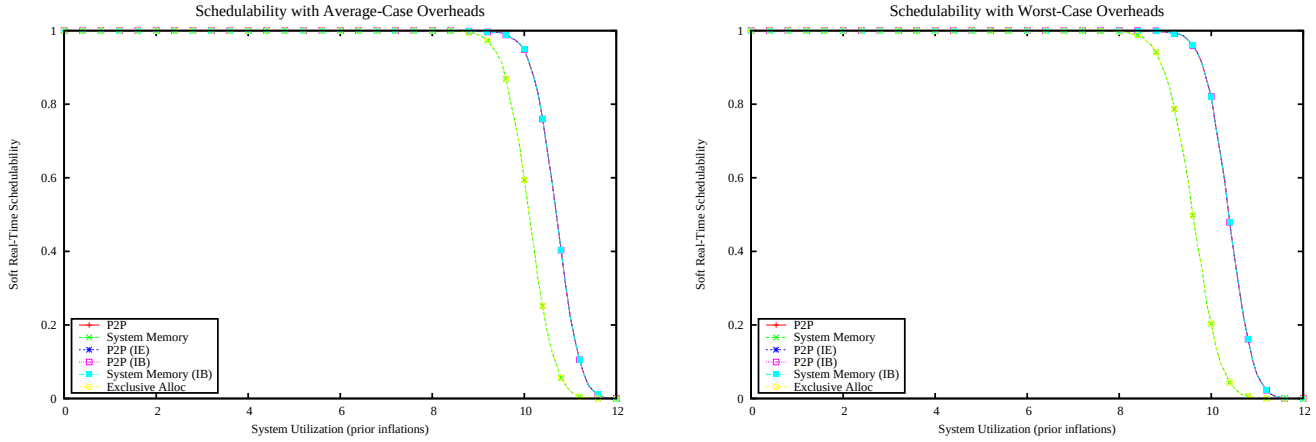

Figure 7093: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

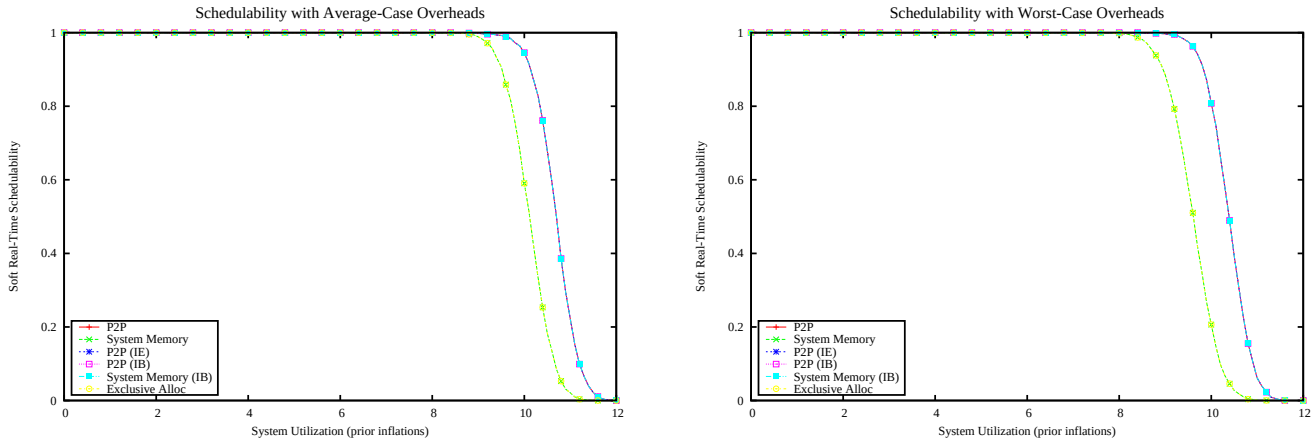

Figure 7094: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

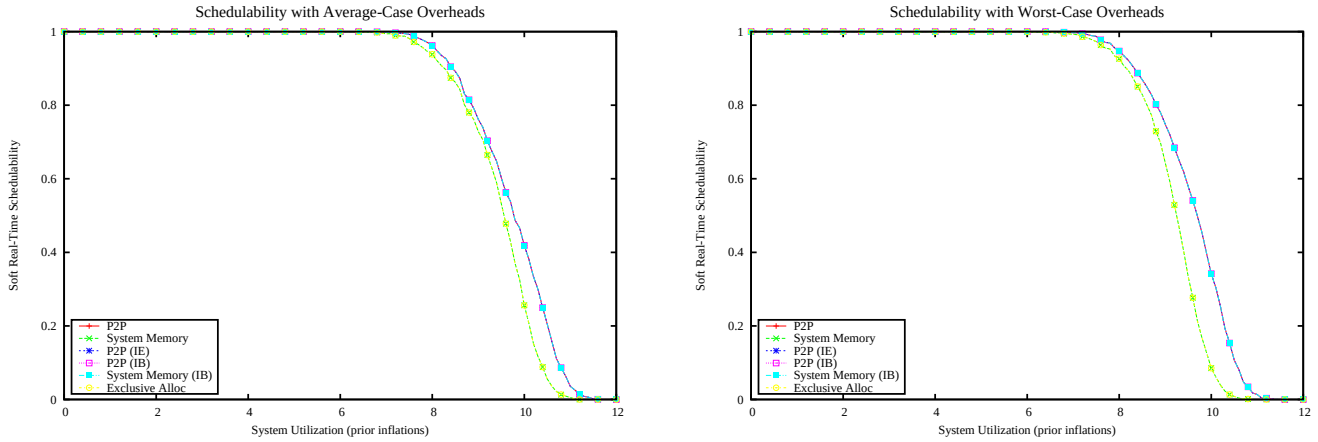

Figure 7095: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

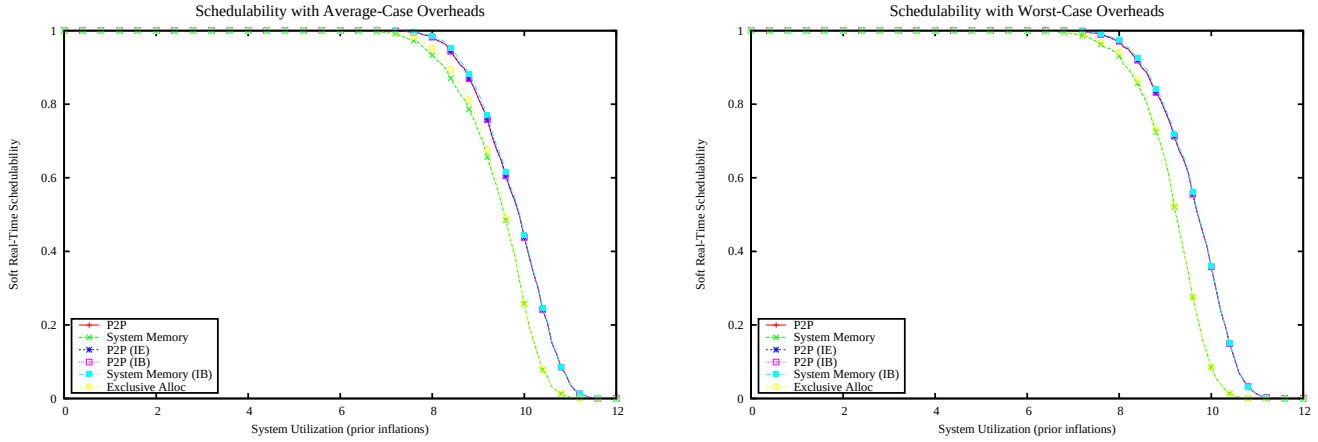

Figure 7096: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

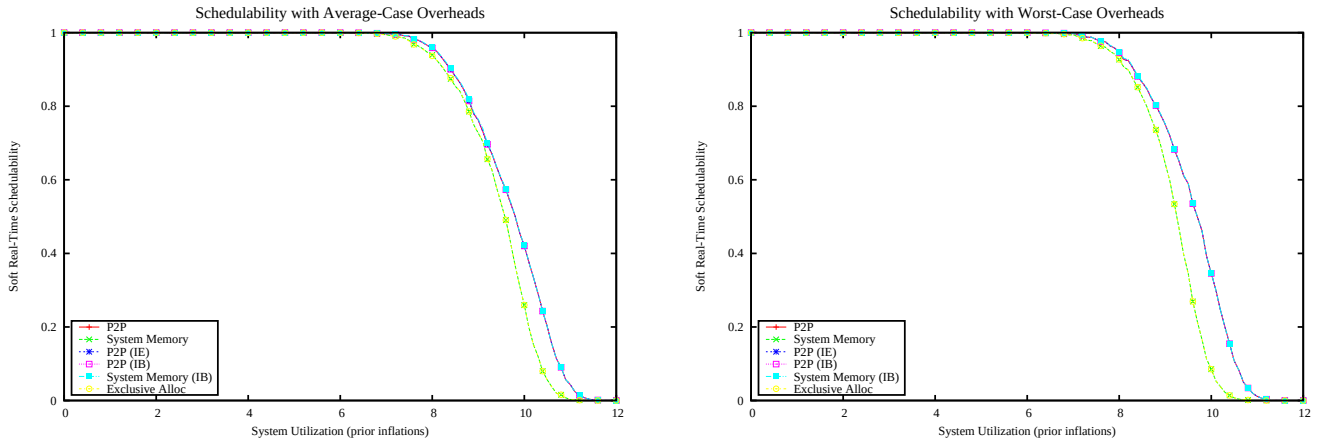

Figure 7097: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

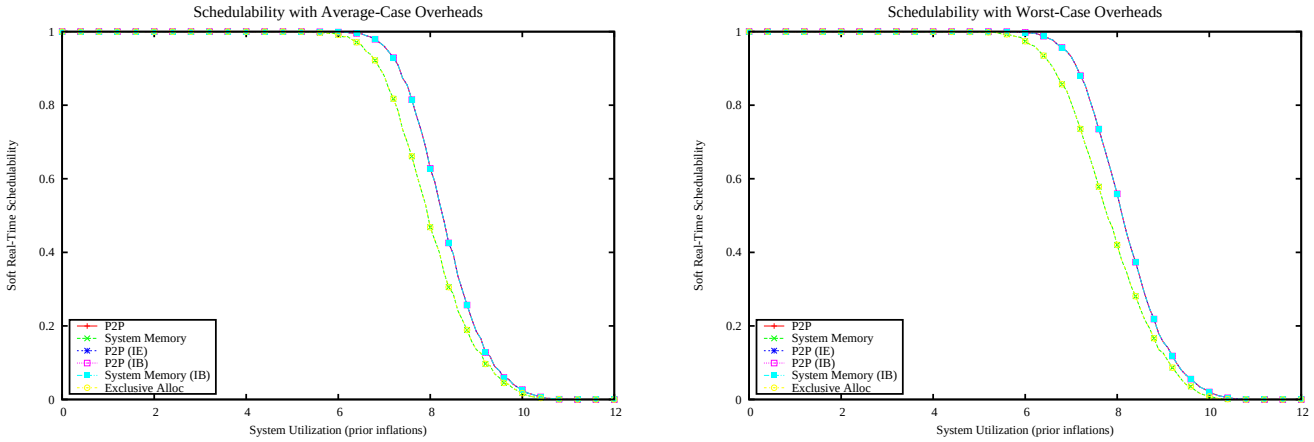

Figure 7098: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

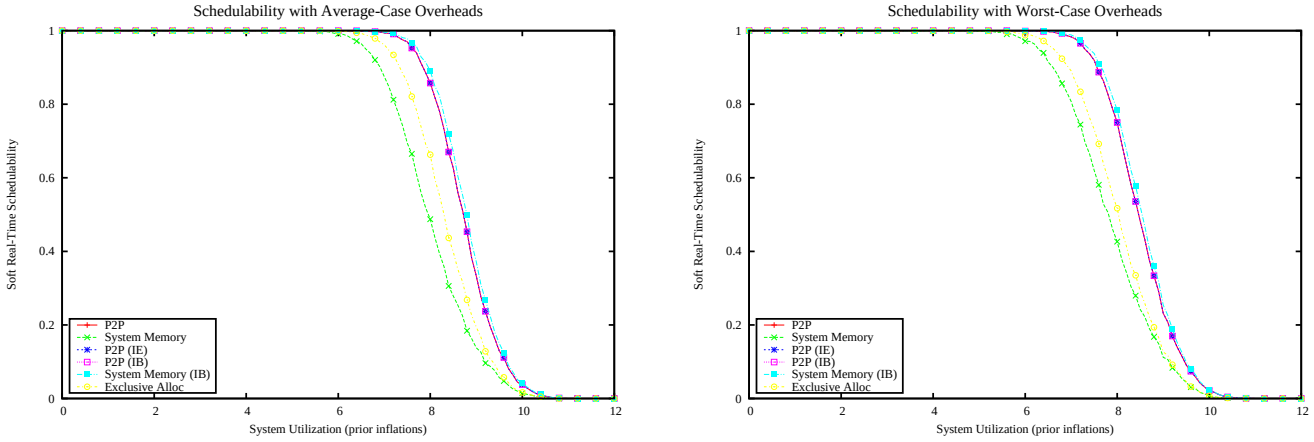

Figure 7099: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

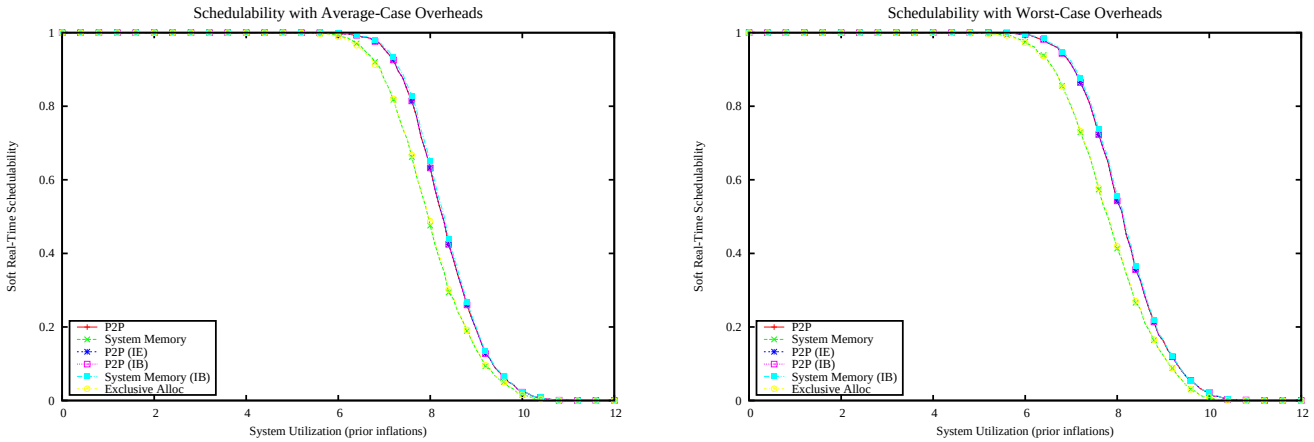

Figure 7100: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

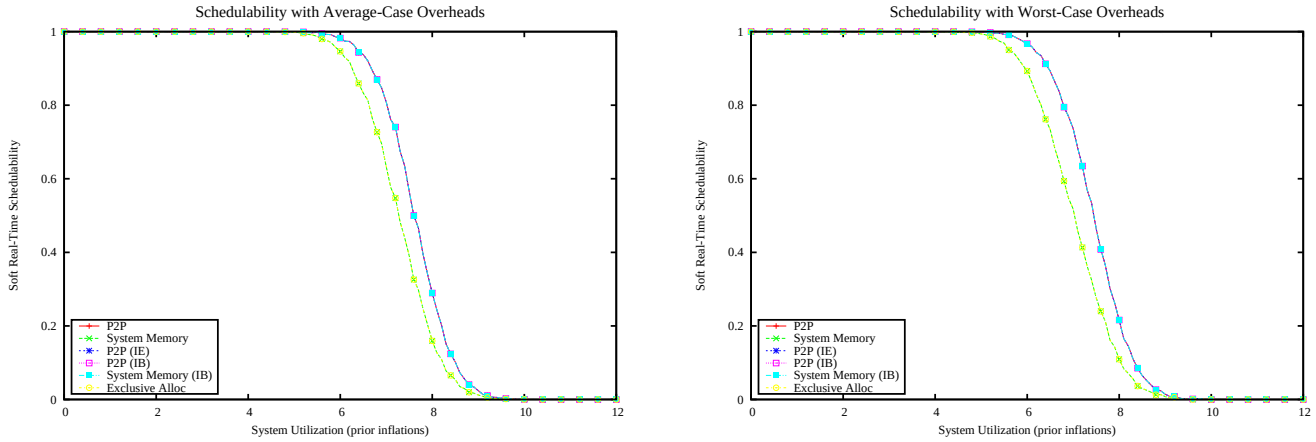

Figure 7101: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

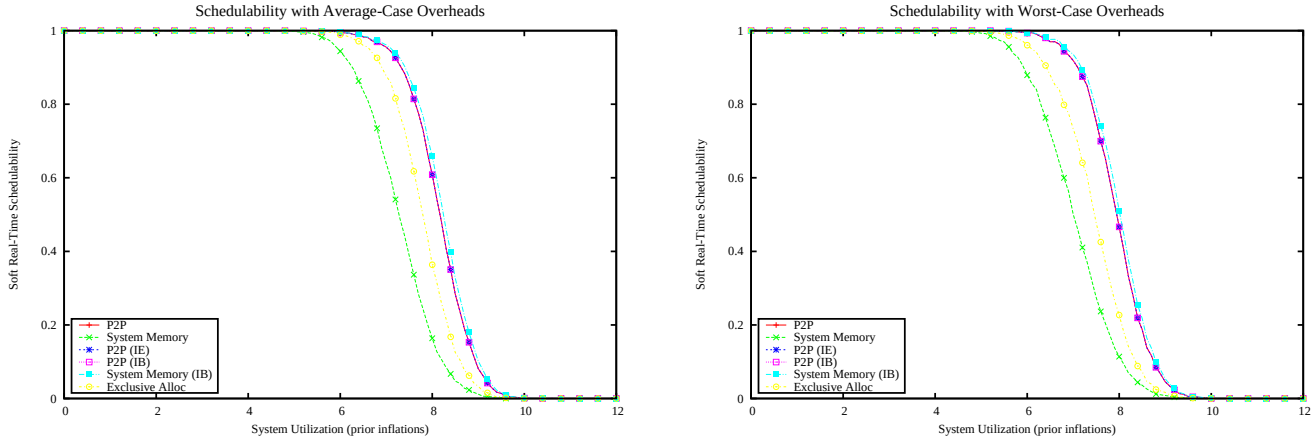

Figure 7102: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

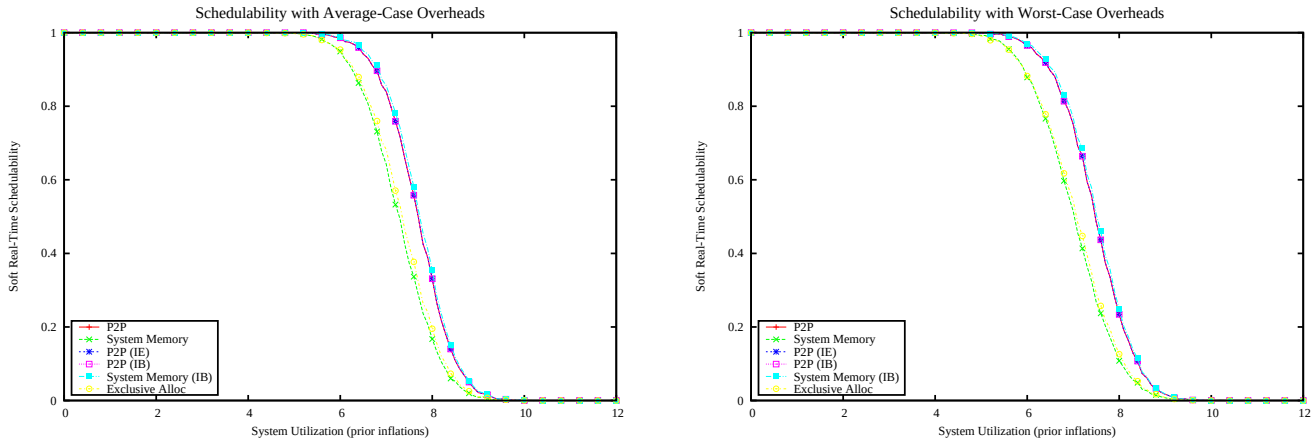

Figure 7103: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

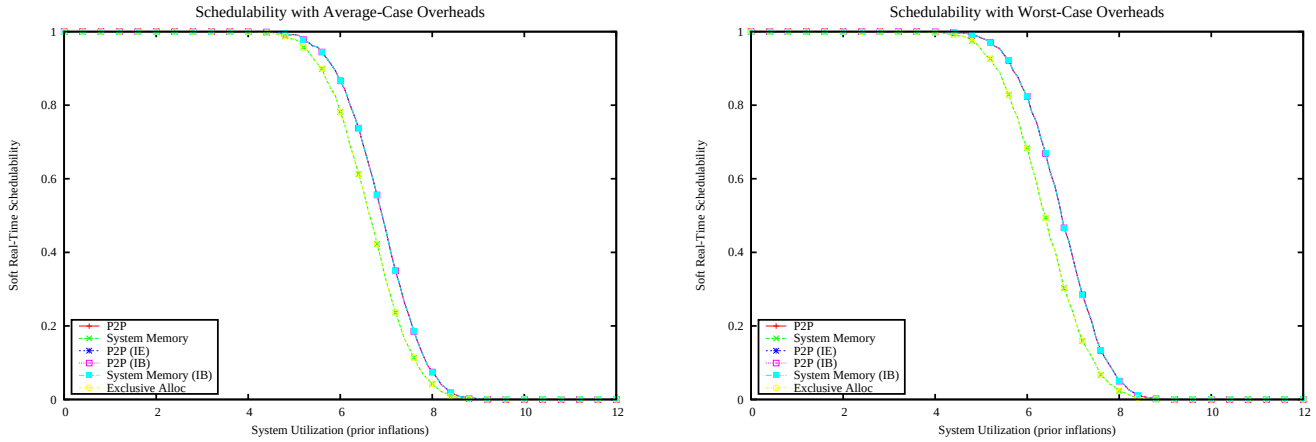

Figure 7104: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

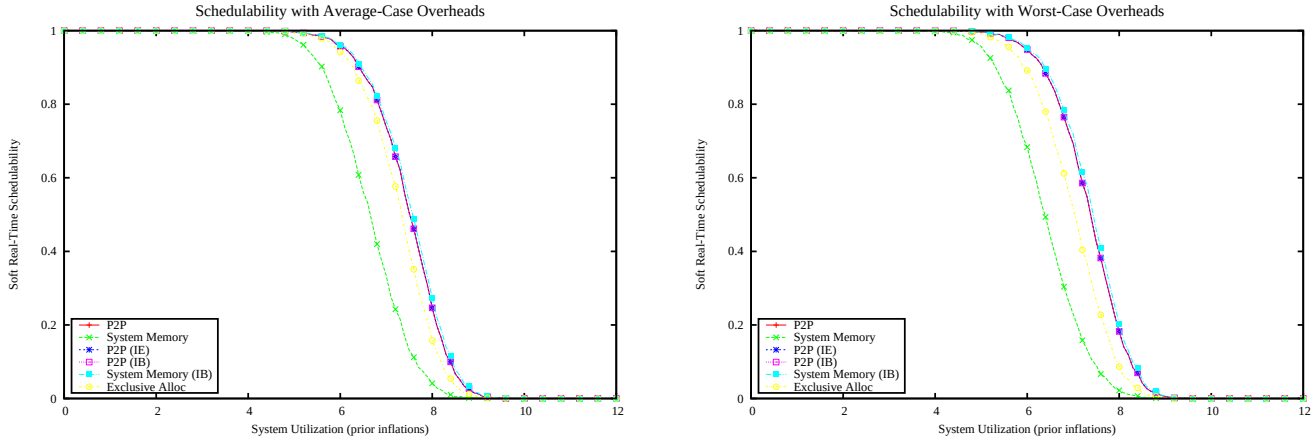

Figure 7105: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

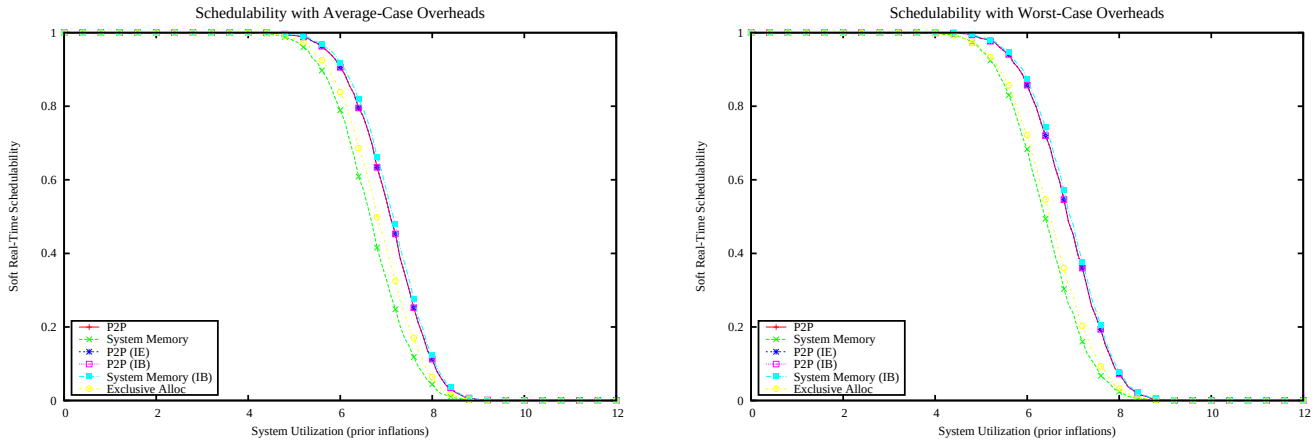

Figure 7106: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

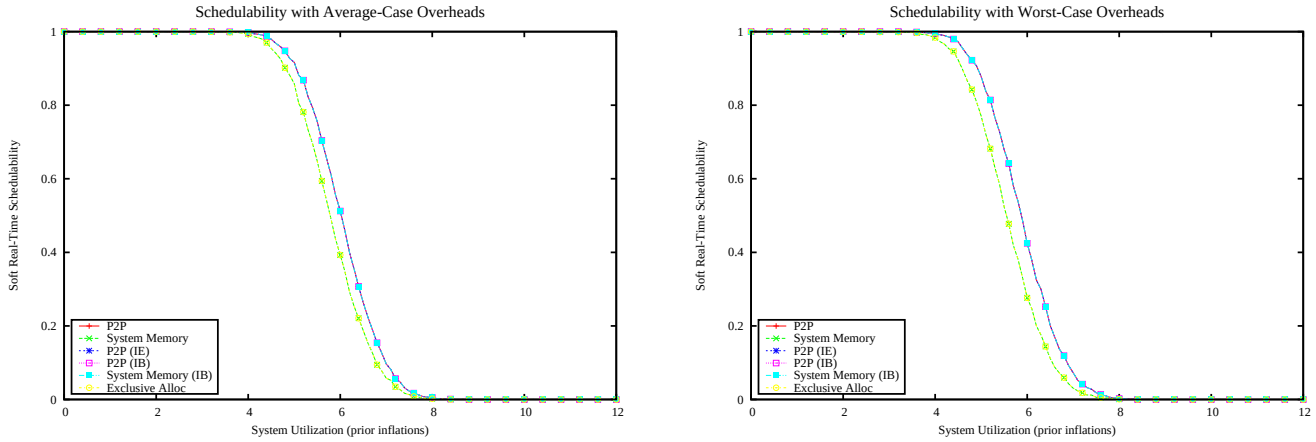

Figure 7107: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

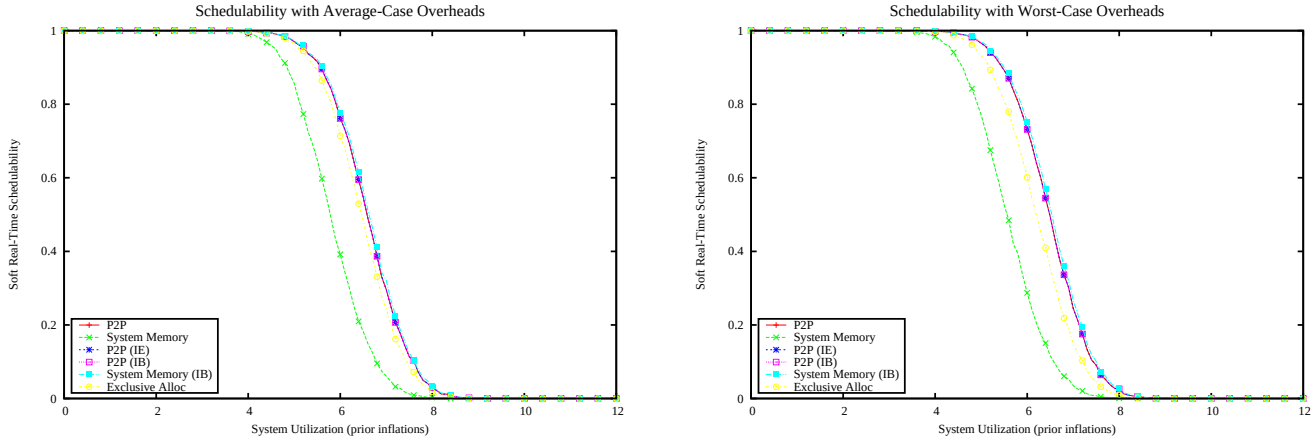

Figure 7108: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

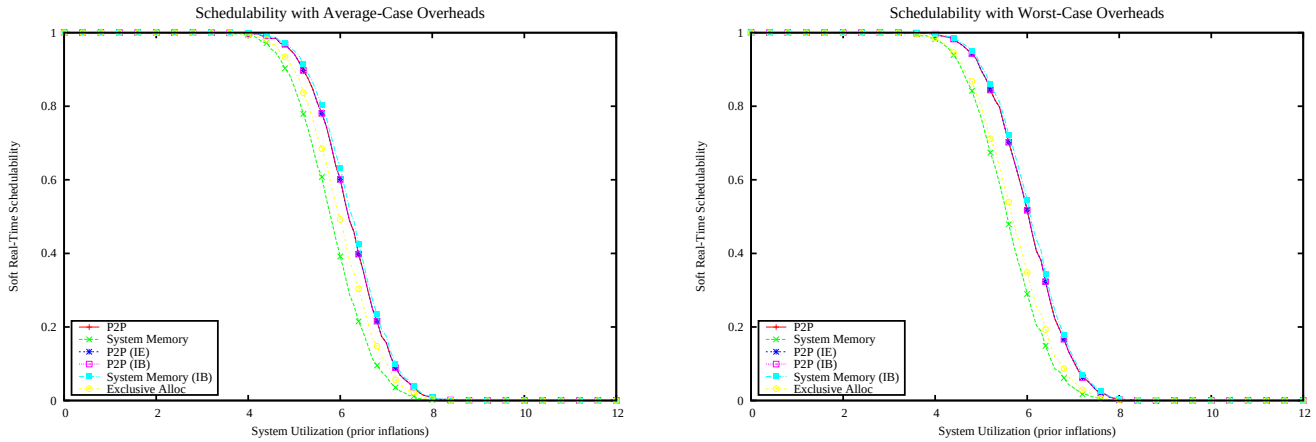

Figure 7109: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

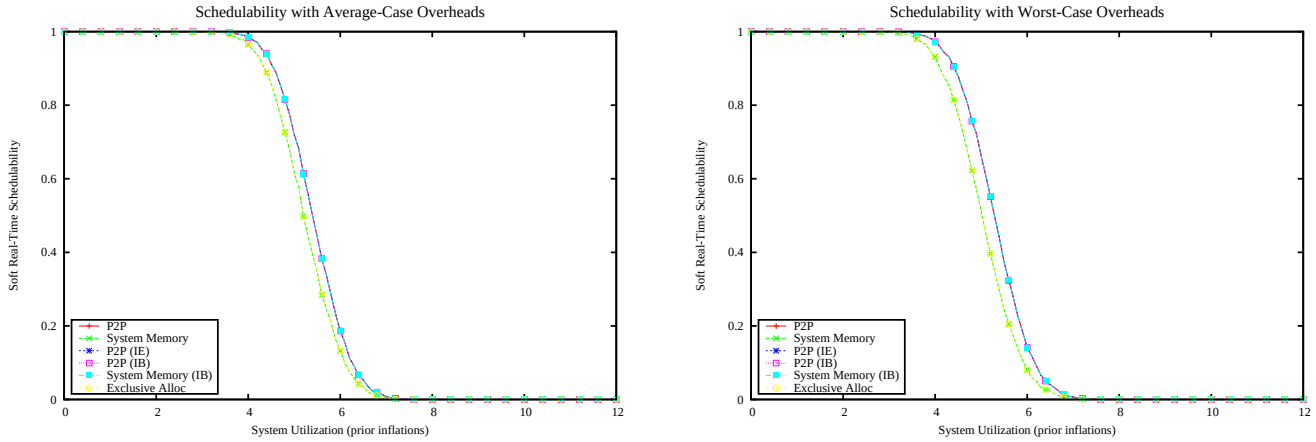

Figure 7110: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

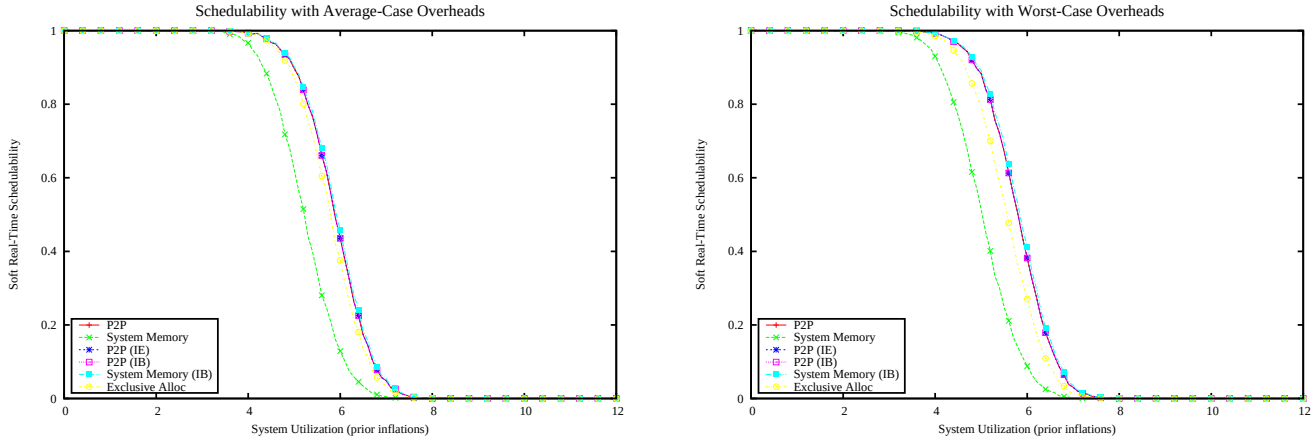

Figure 7111: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

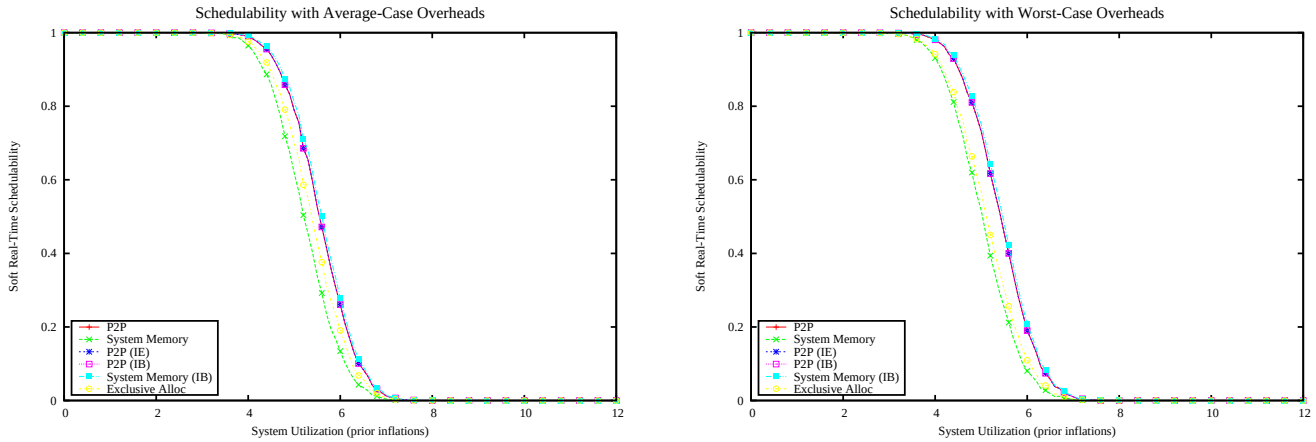

Figure 7112: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

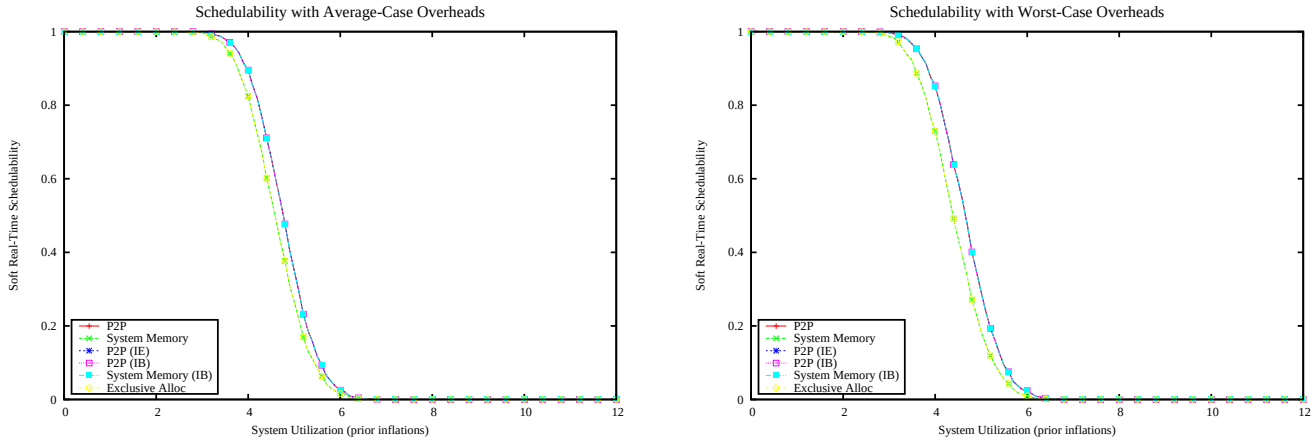

Figure 7113: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

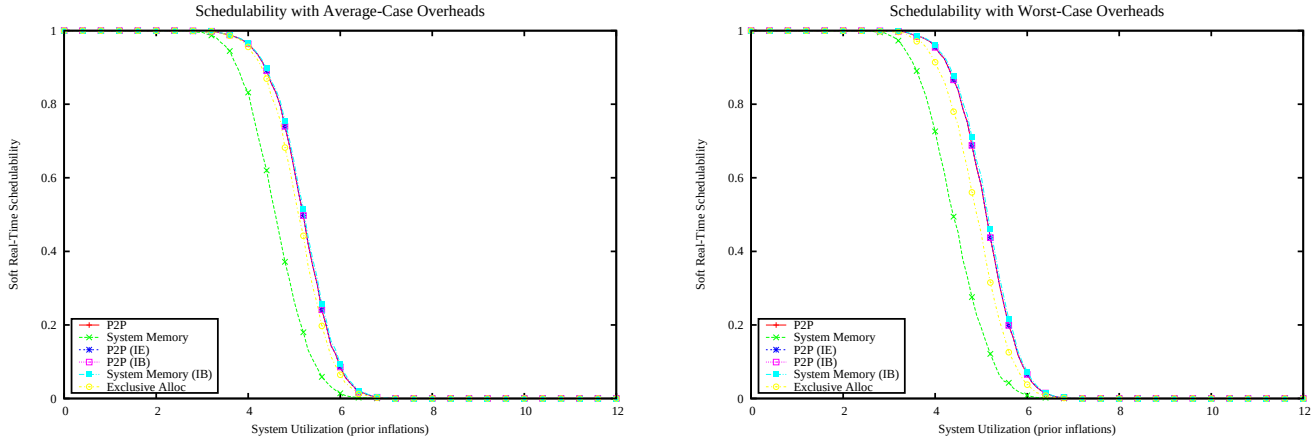

Figure 7114: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

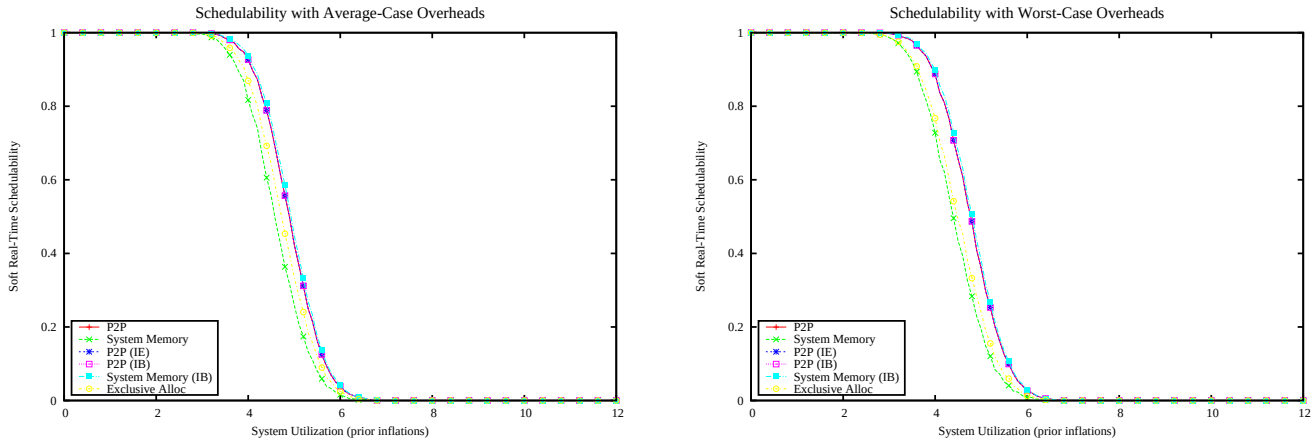

Figure 7115: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

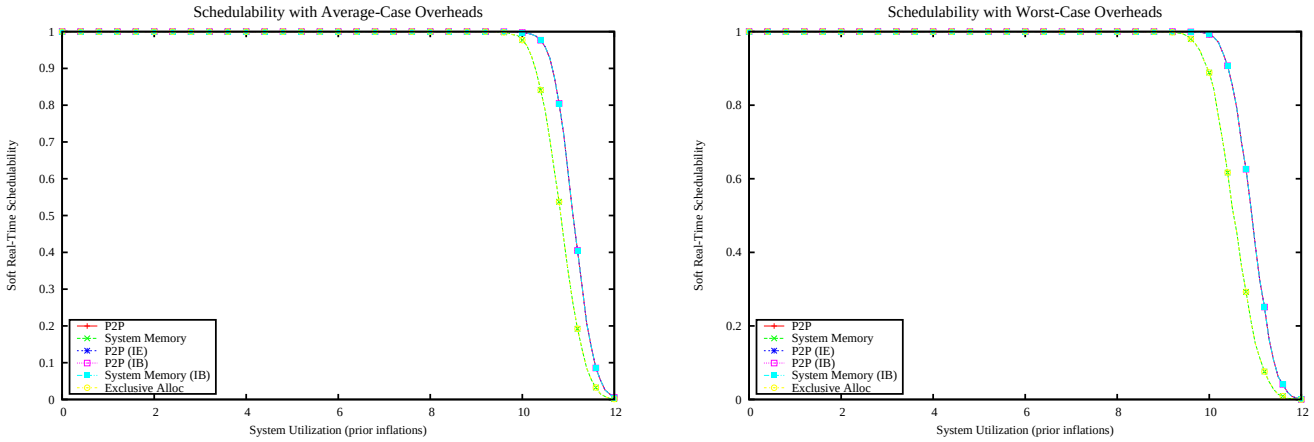

Figure 7116: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

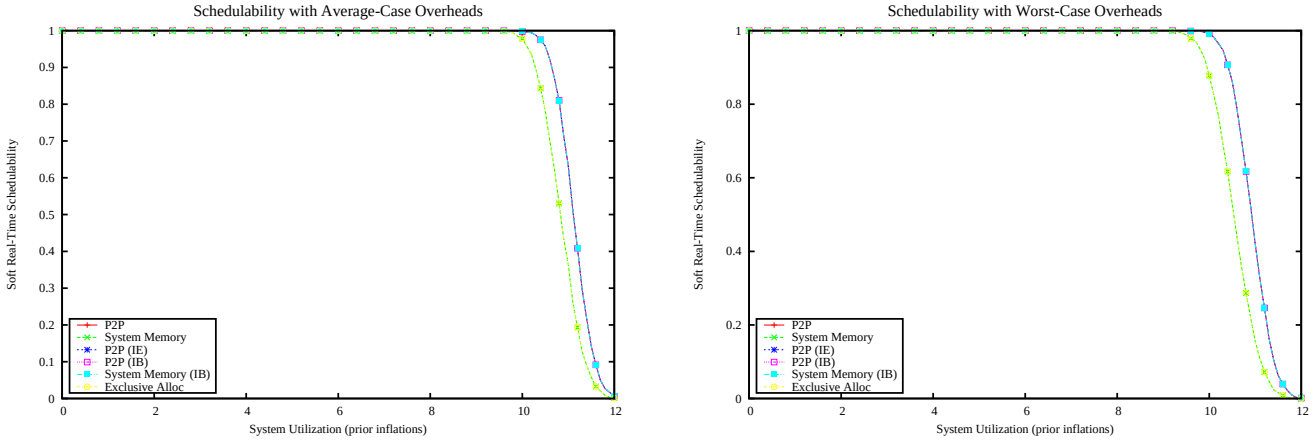

Figure 7117: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

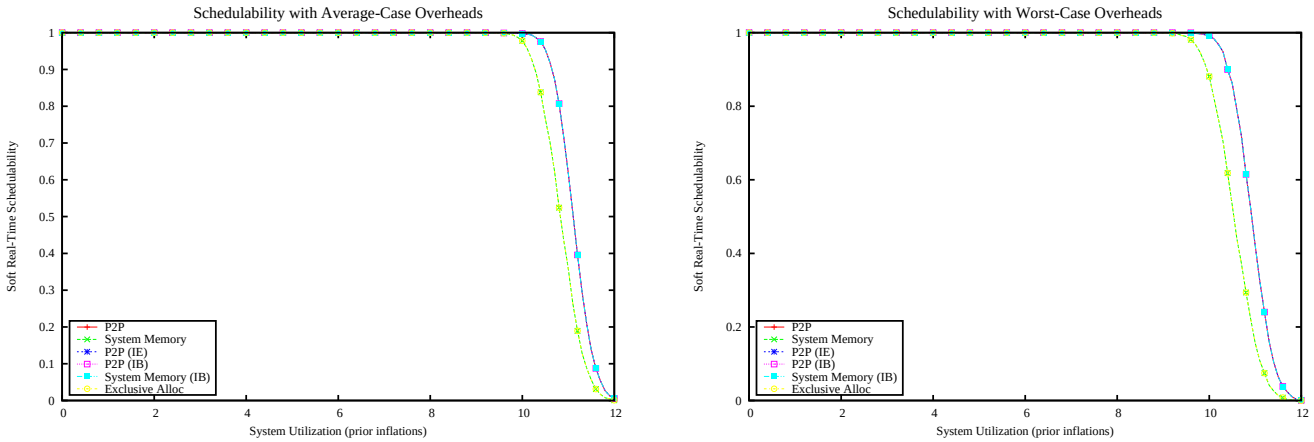

Figure 7118: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

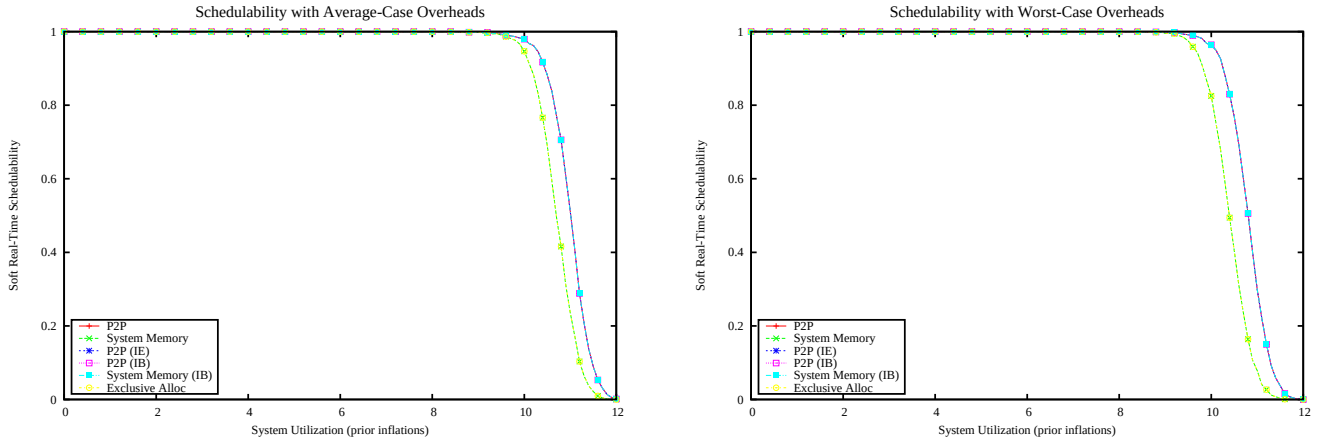

Figure 7119: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

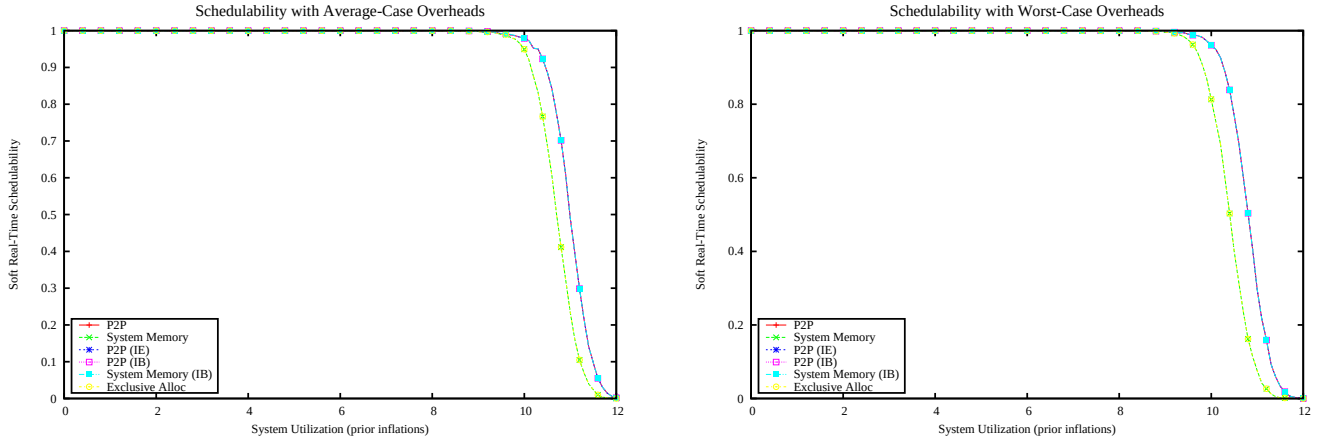

Figure 7120: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

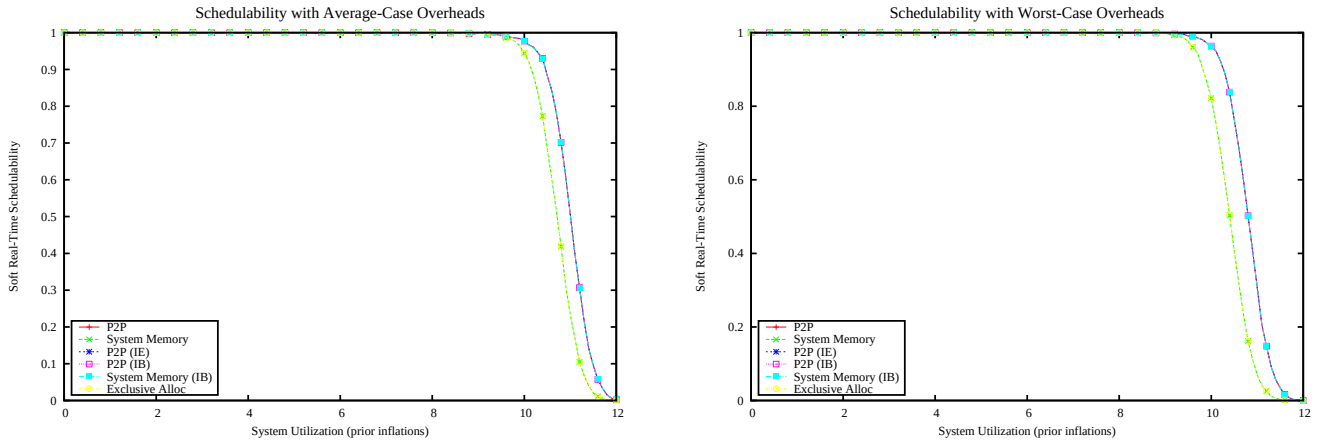

Figure 7121: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

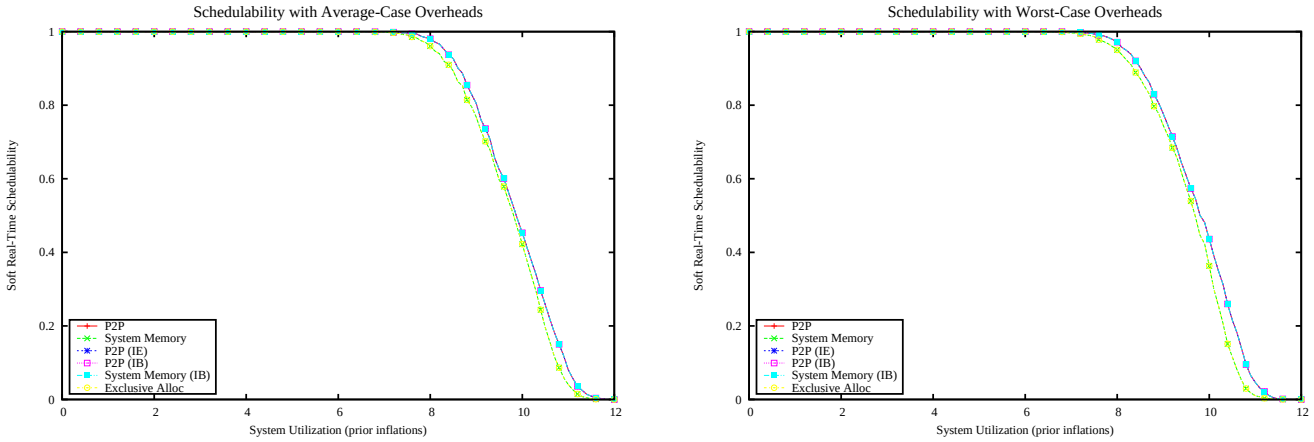

Figure 7122: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

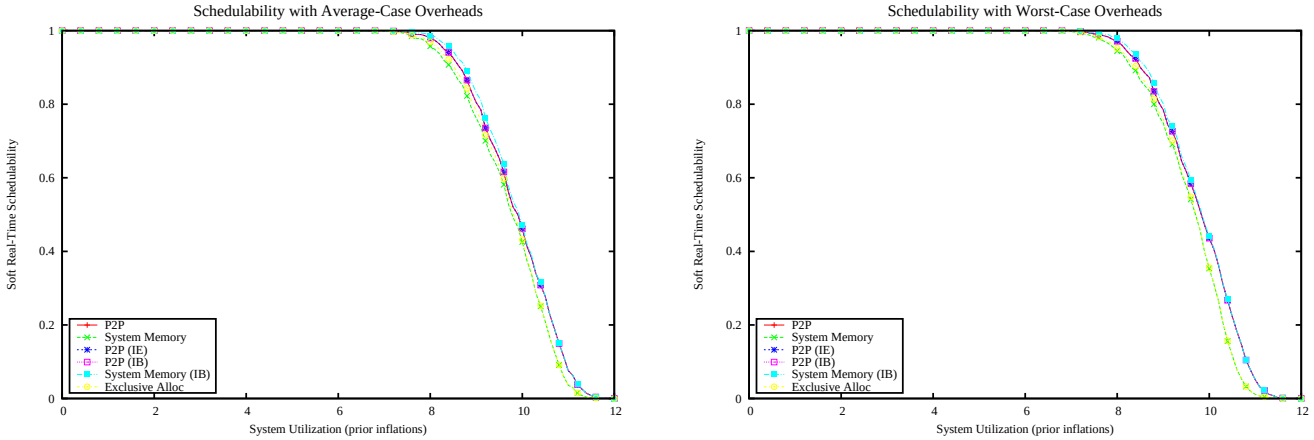

Figure 7123: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

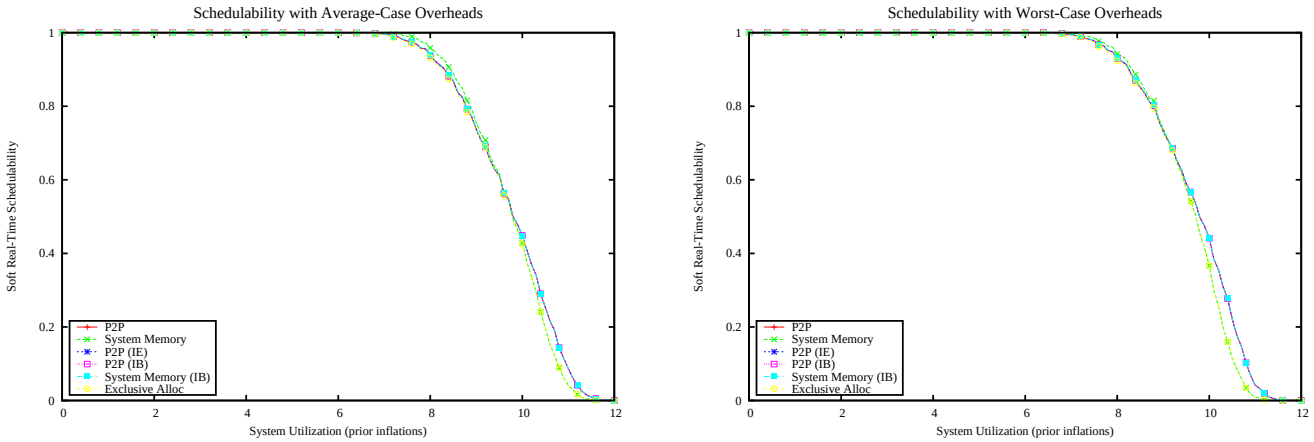

Figure 7124: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

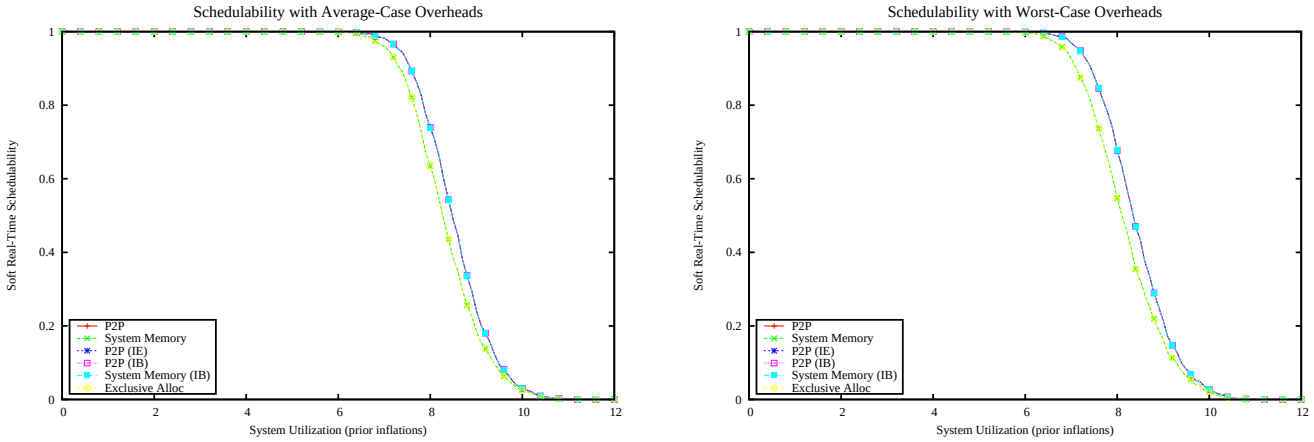

Figure 7125: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

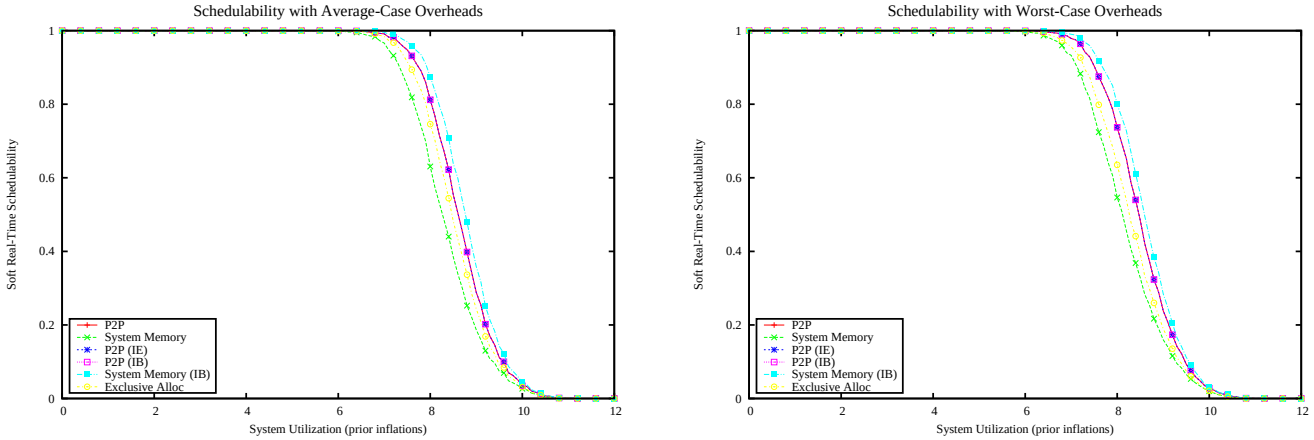

Figure 7126: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

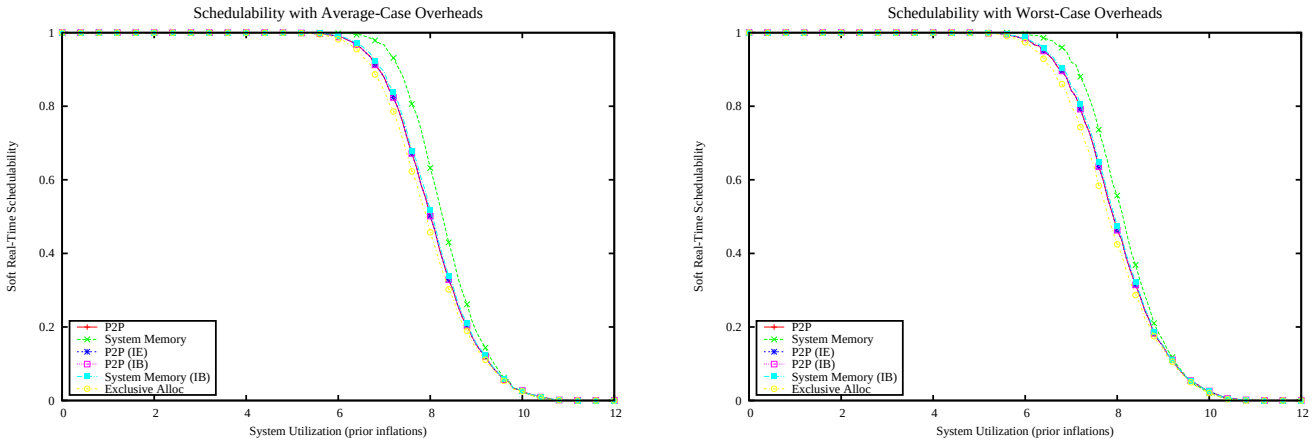

Figure 7127: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

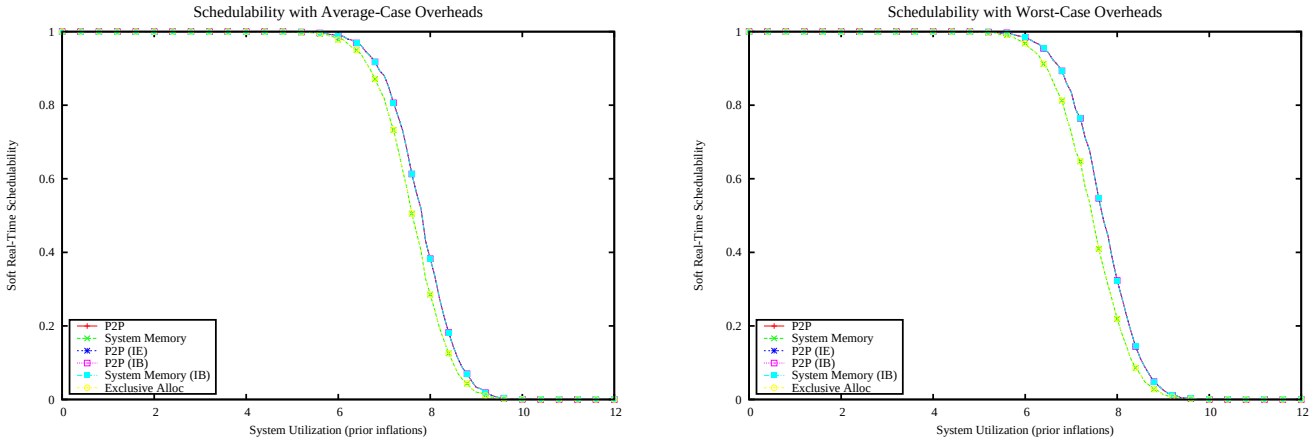

Figure 7128: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

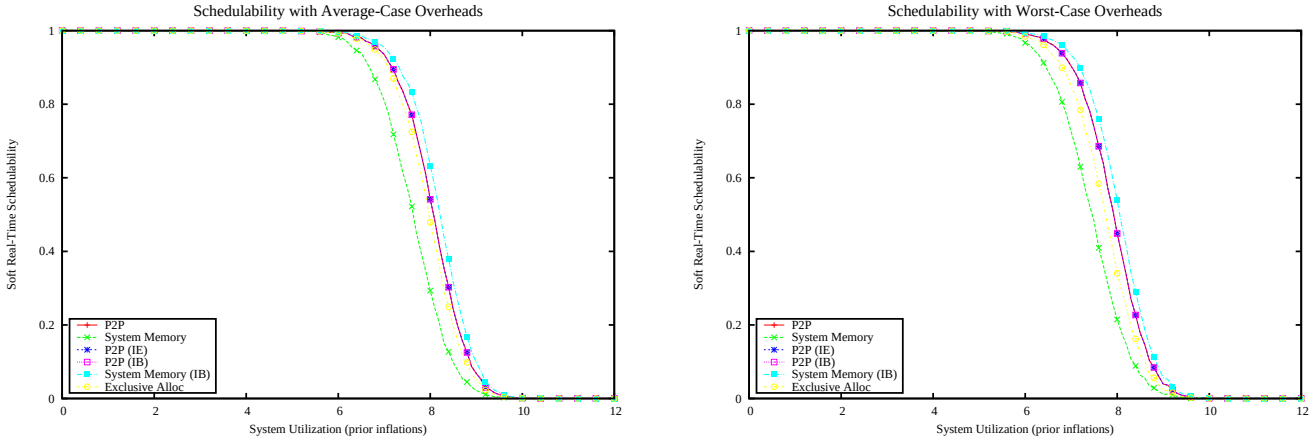

Figure 7129: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

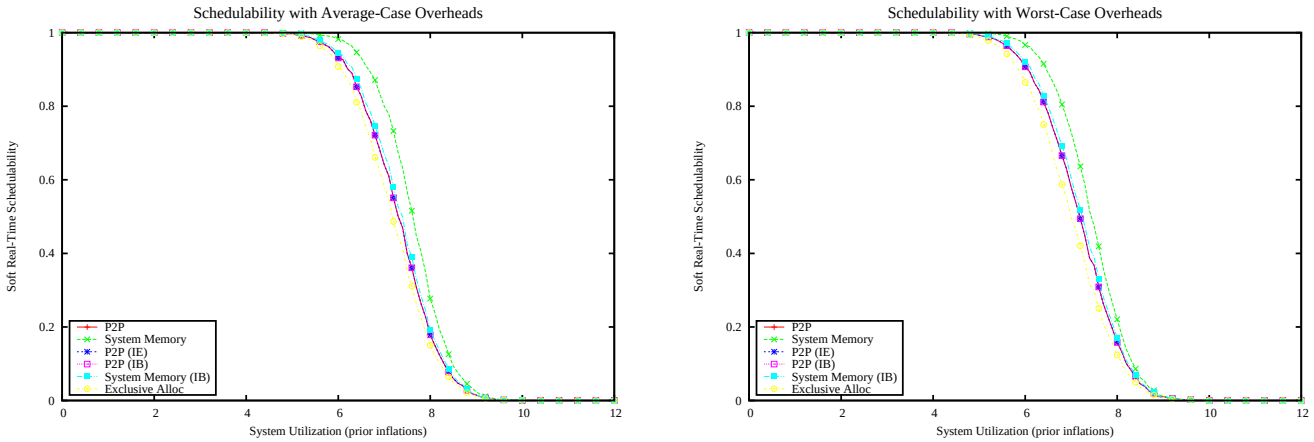

Figure 7130: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

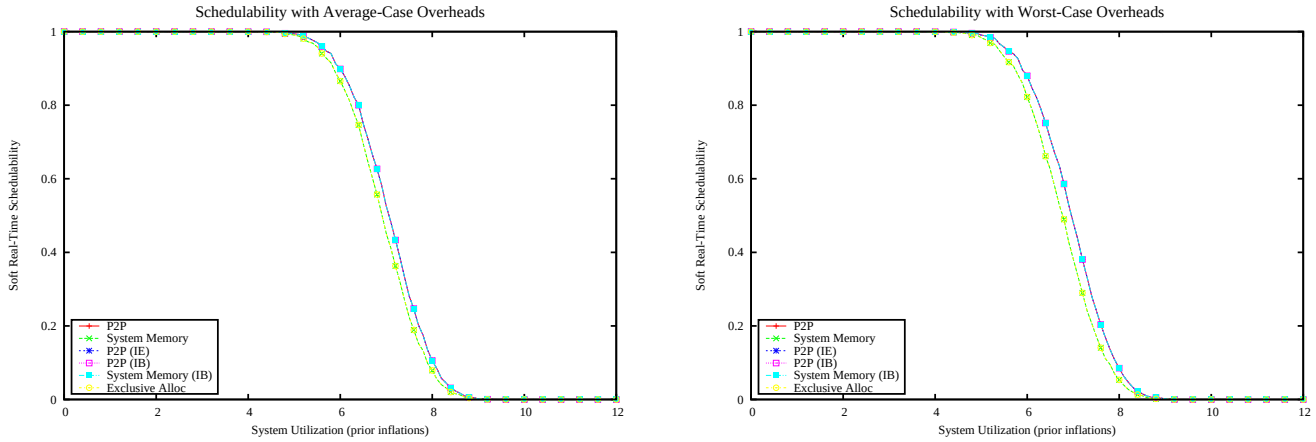

Figure 7131: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

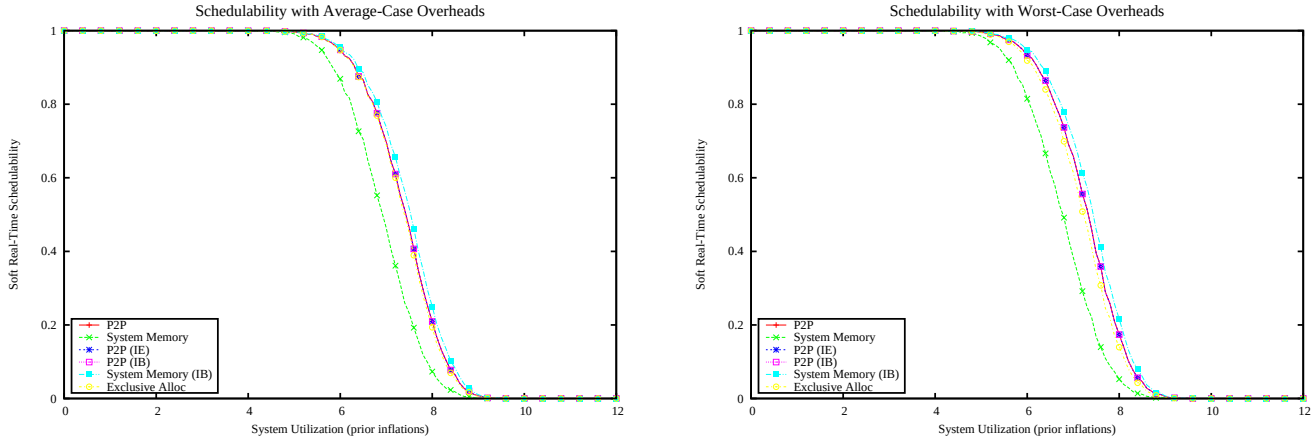

Figure 7132: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

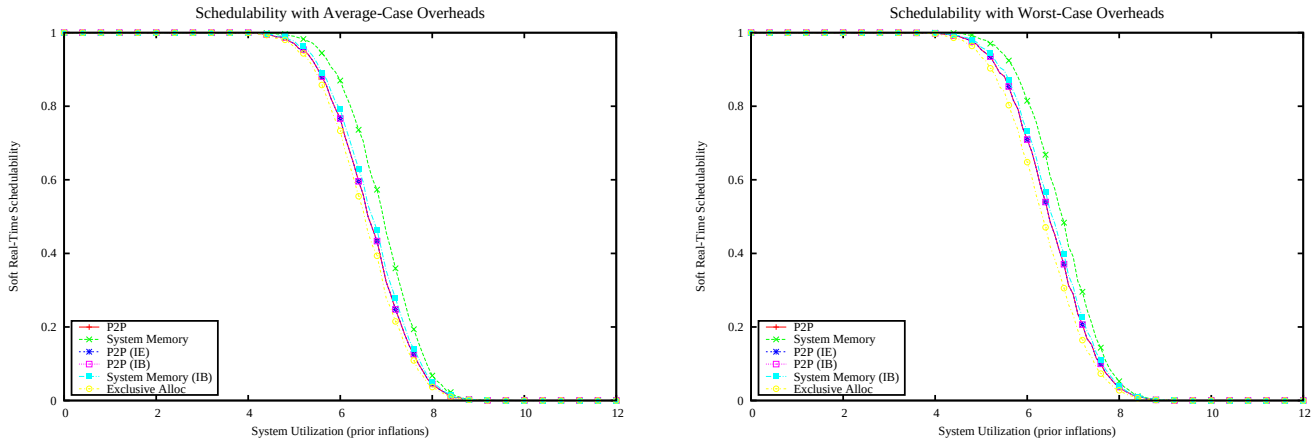

Figure 7133: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

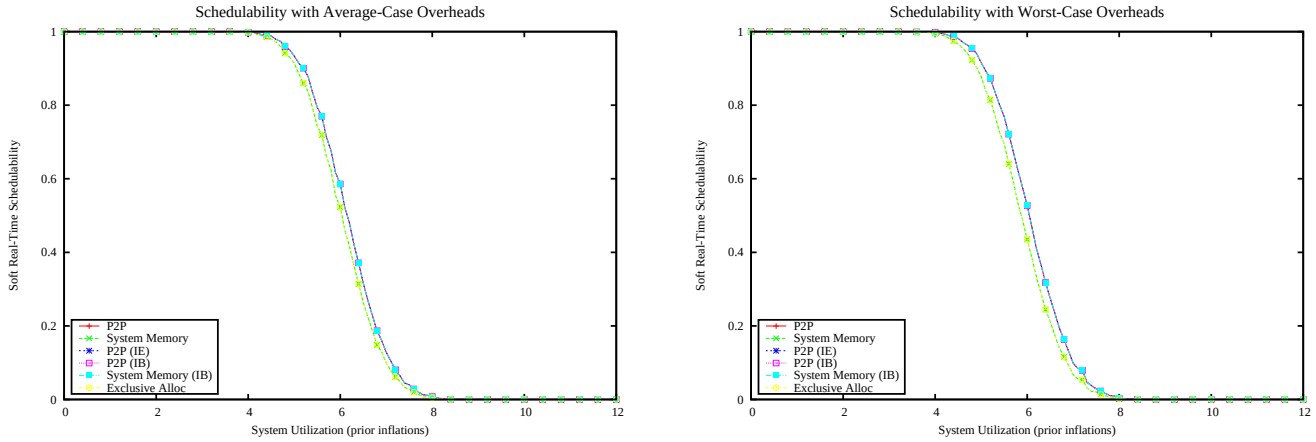

Figure 7134: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

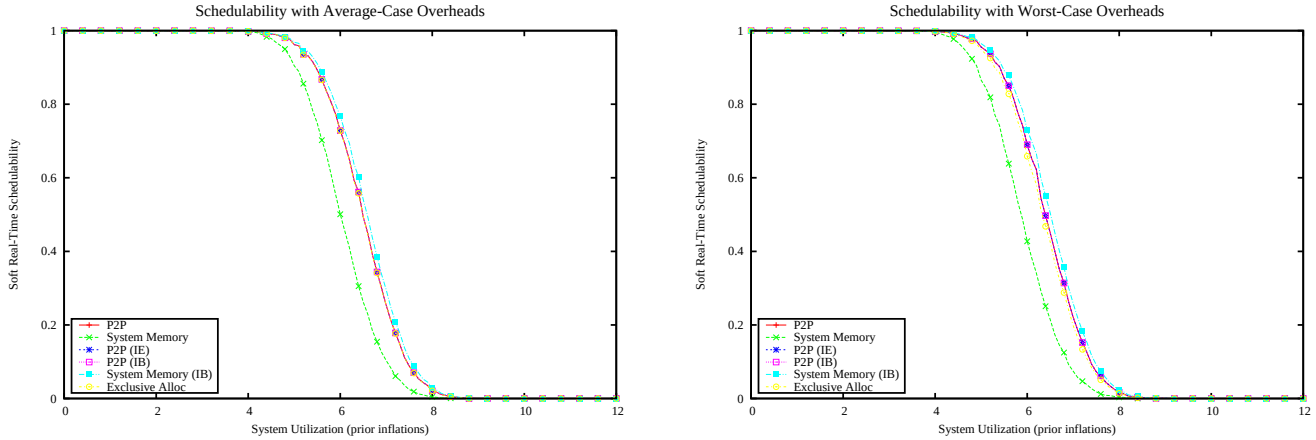

Figure 7135: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

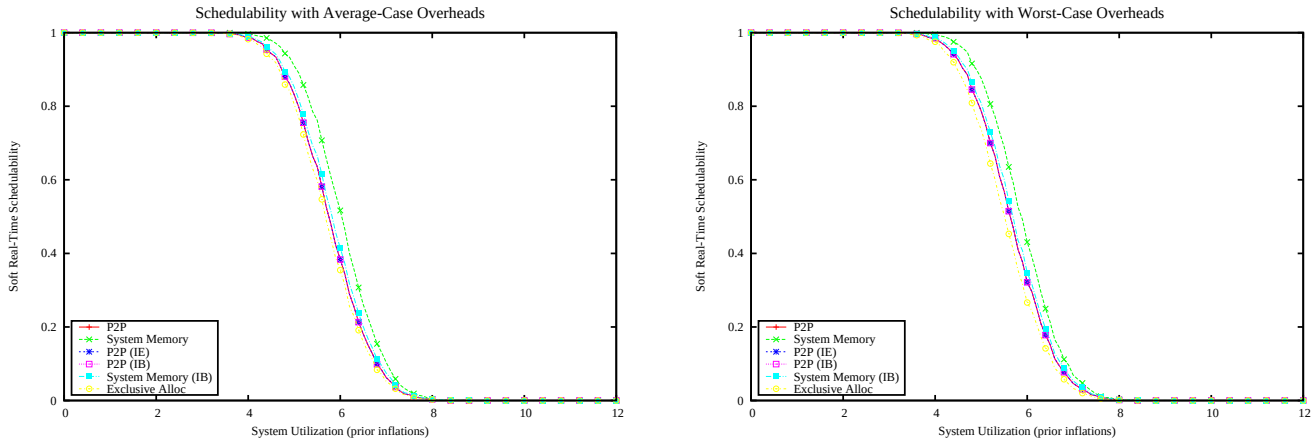

Figure 7136: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

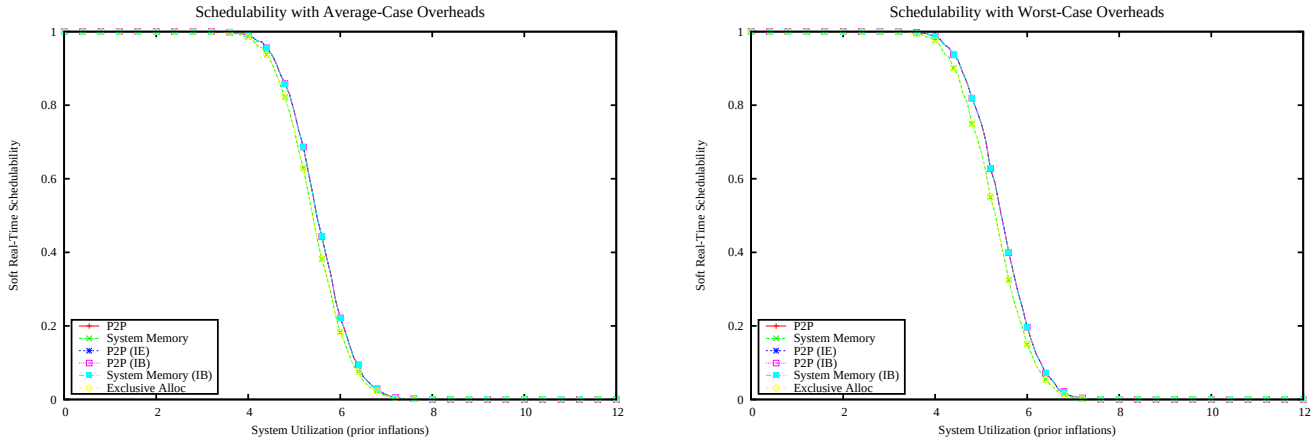

Figure 7137: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

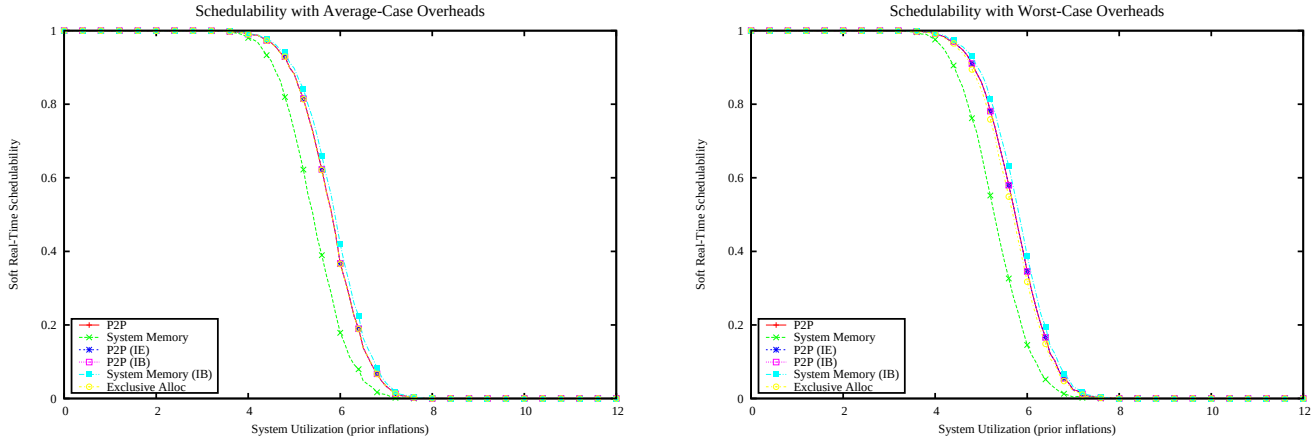

Figure 7138: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

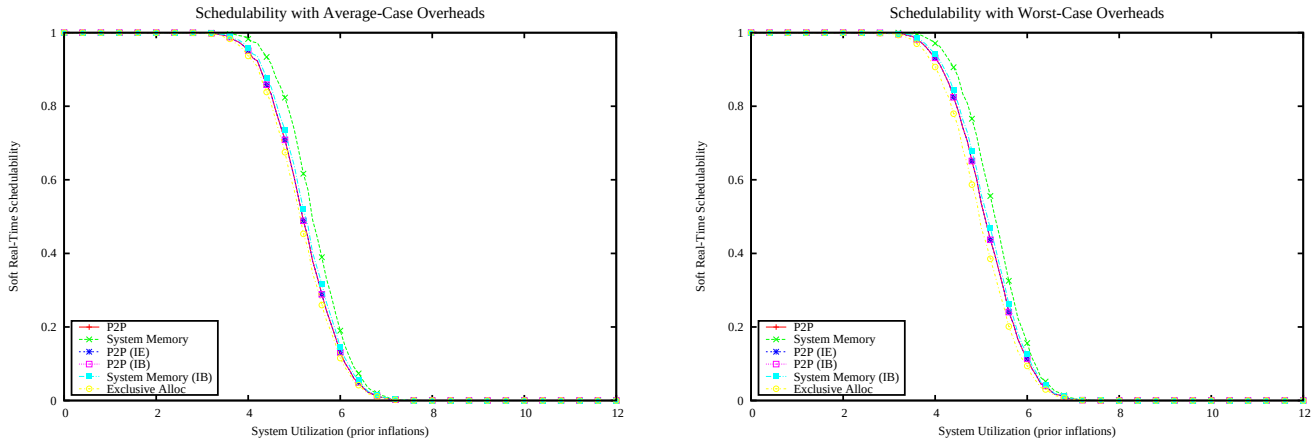

Figure 7139: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

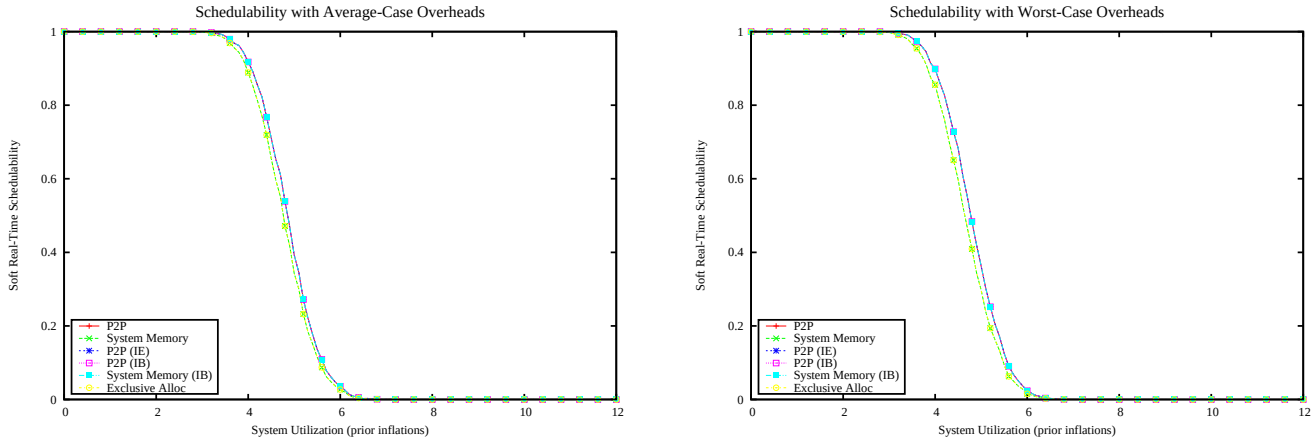

Figure 7140: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

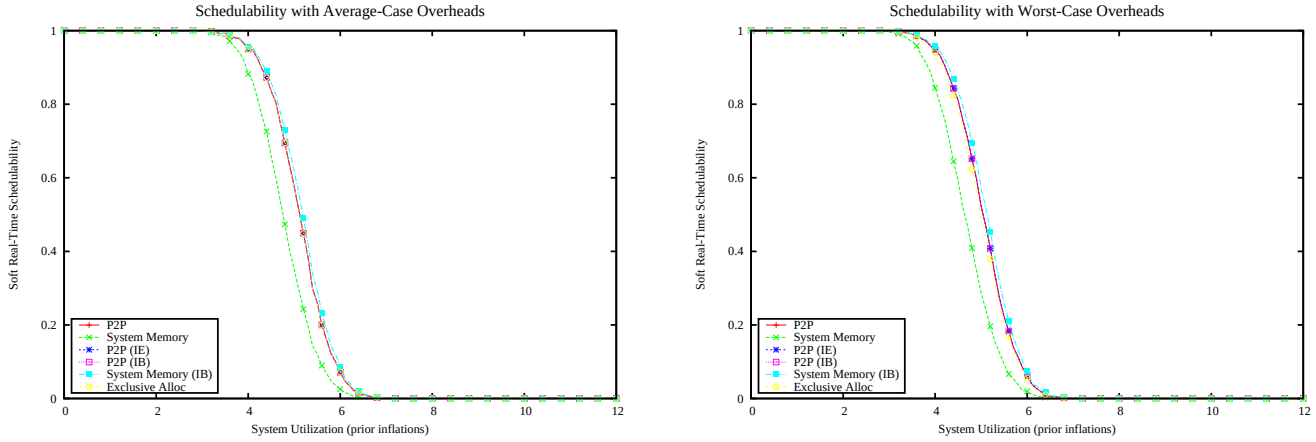

Figure 7141: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

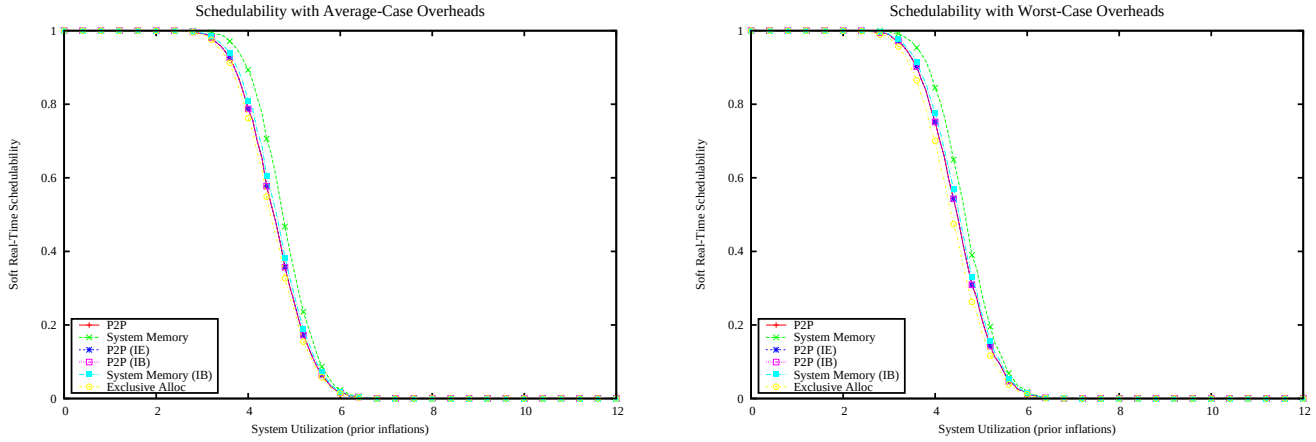

Figure 7142: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 6/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

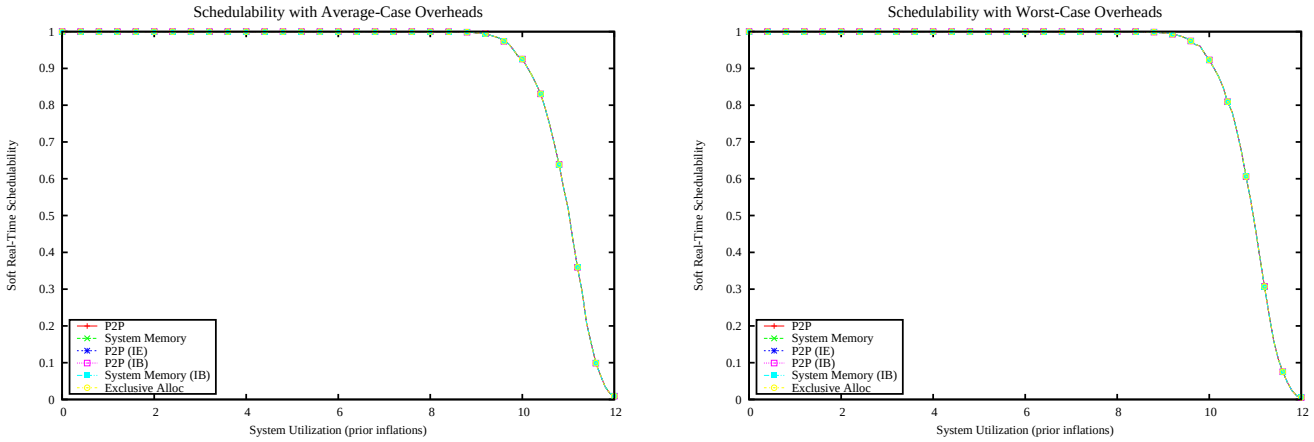

Figure 7143: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

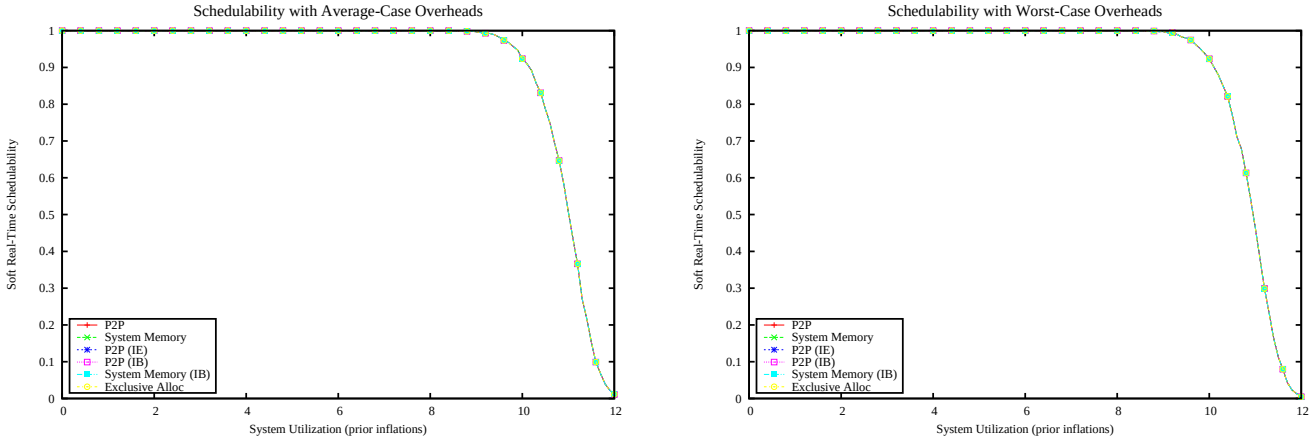

Figure 7144: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

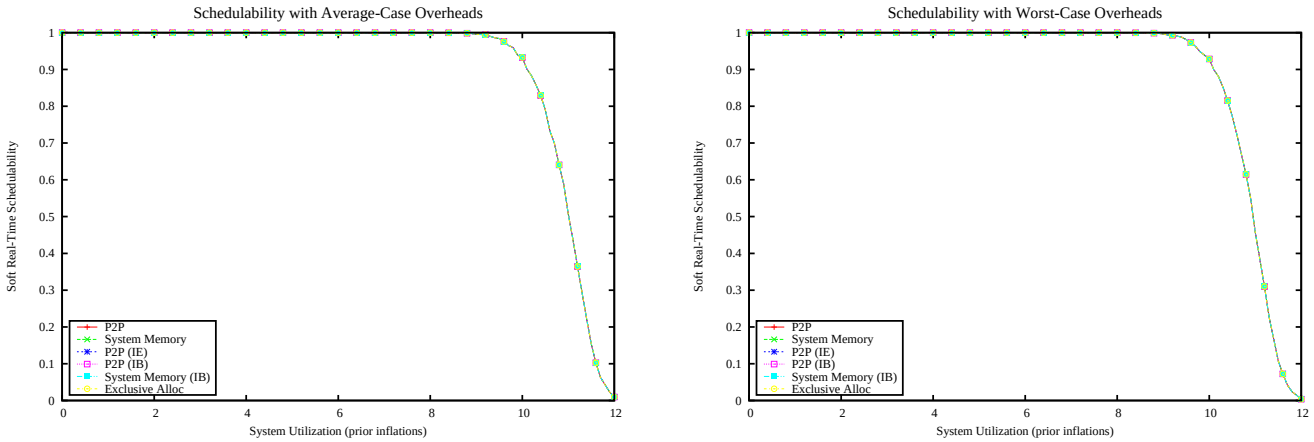

Figure 7145: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

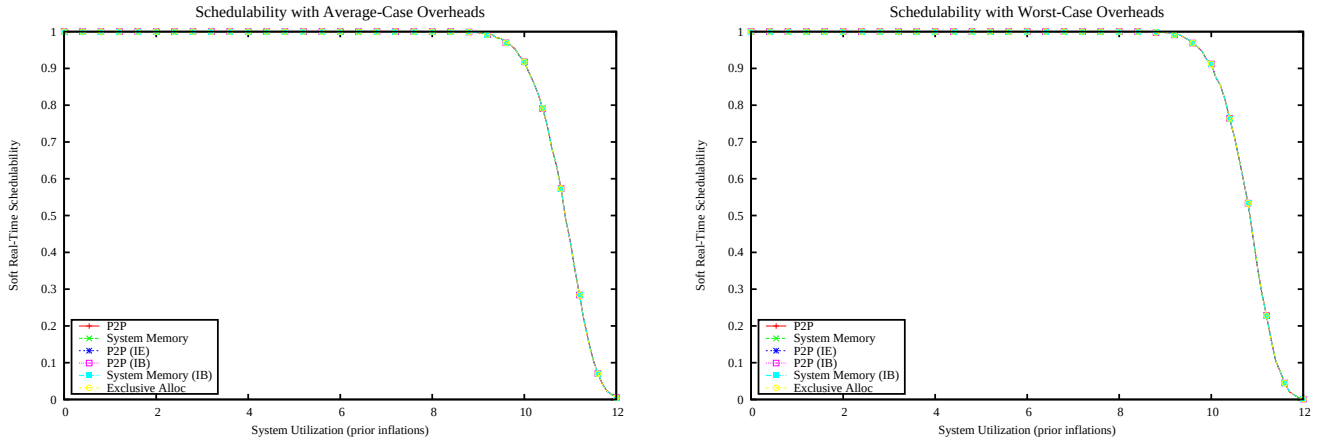

Figure 7146: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

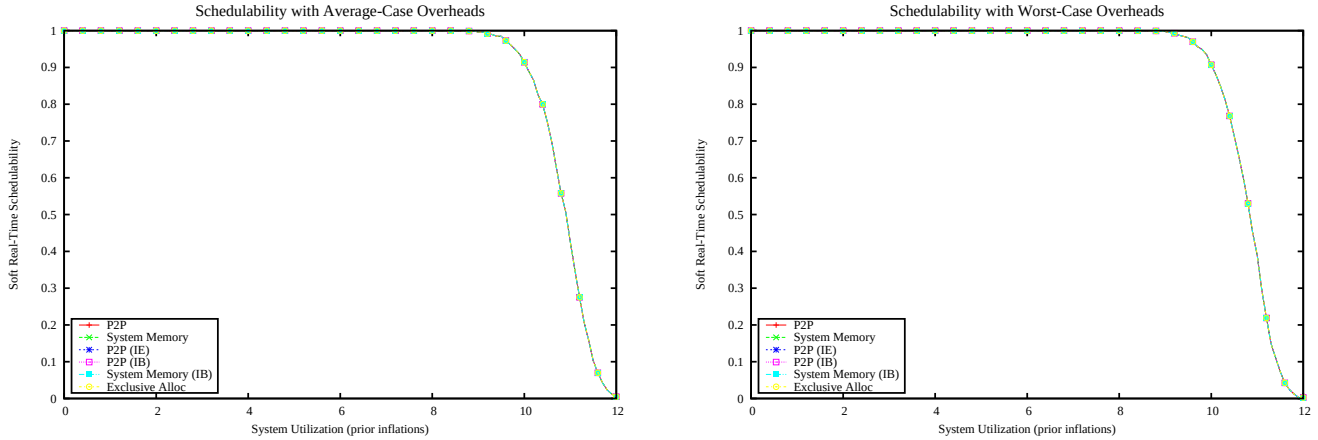

Figure 7147: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

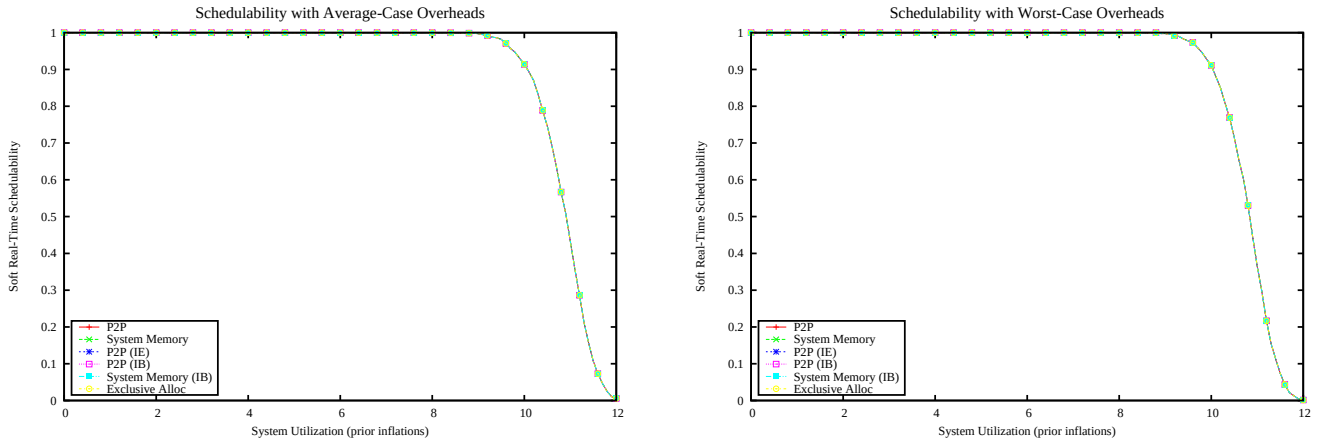

Figure 7148: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

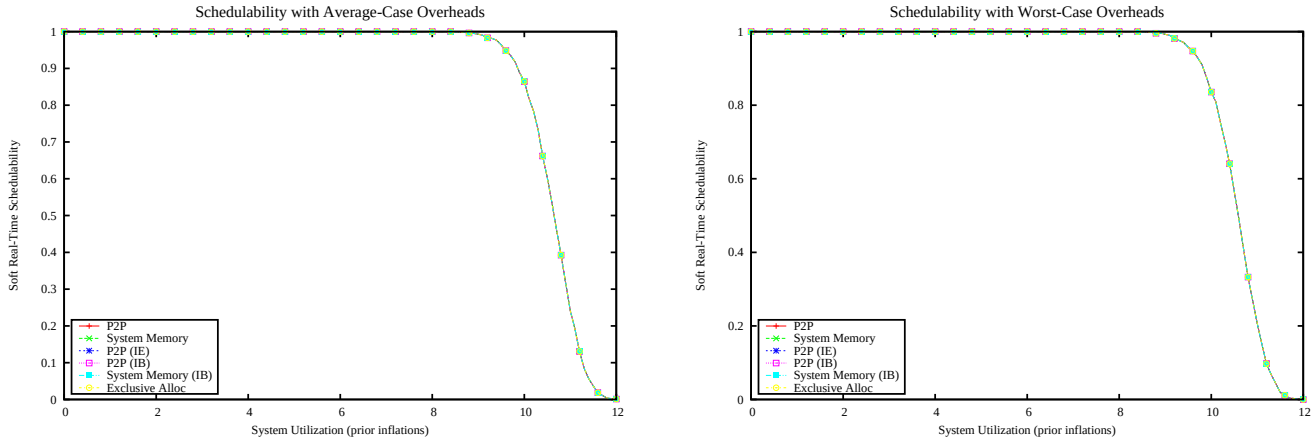

Figure 7149: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

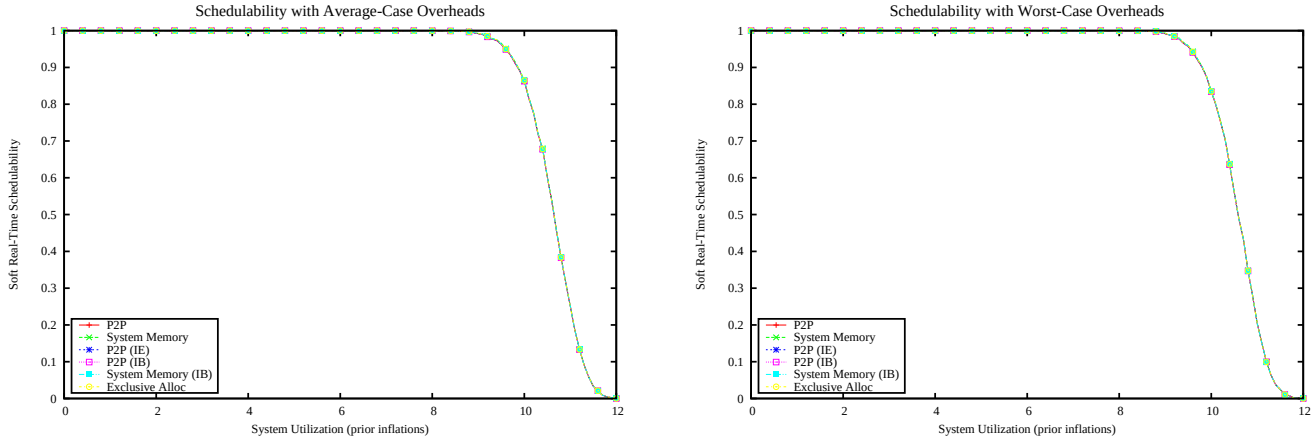

Figure 7150: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

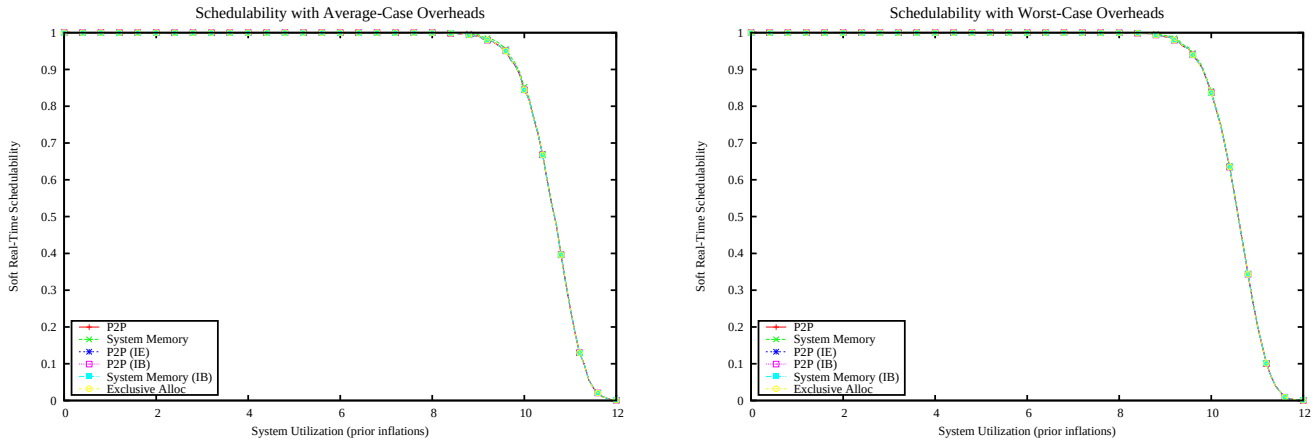

Figure 7151: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

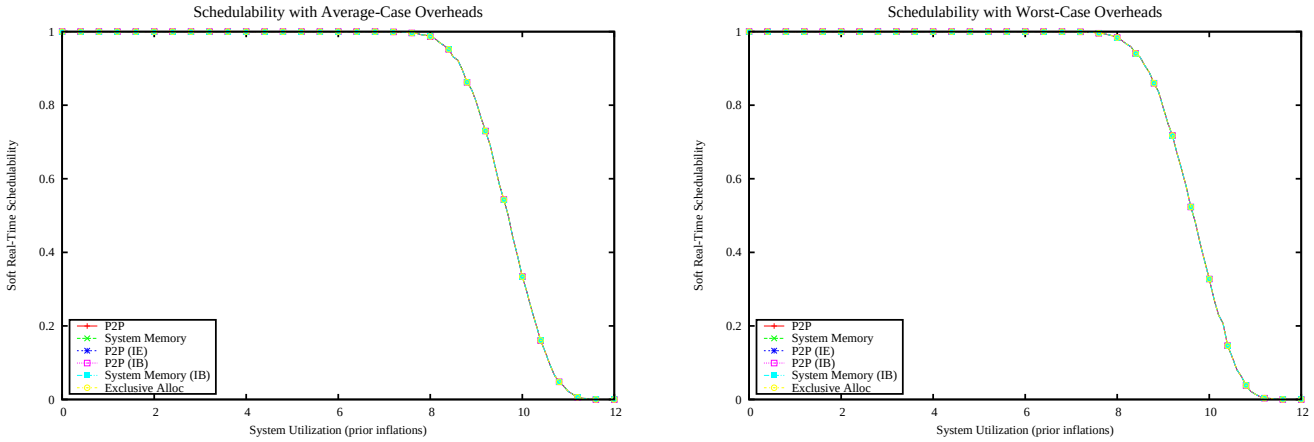

Figure 7152: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

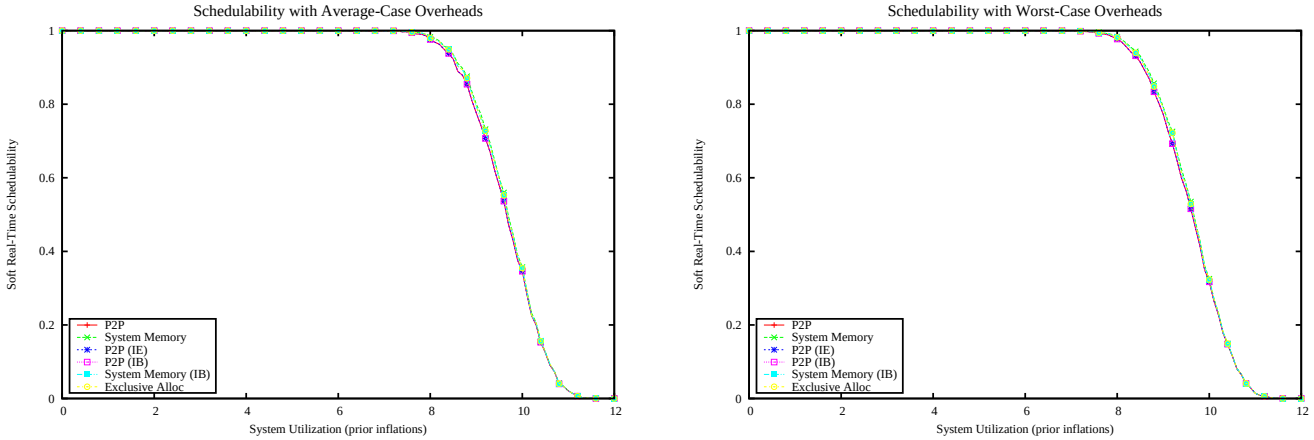

Figure 7153: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

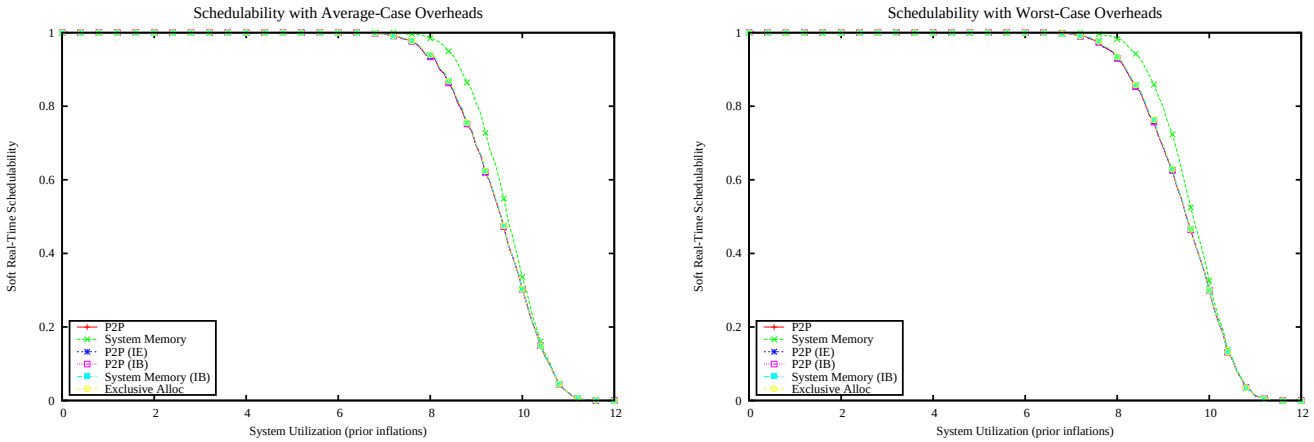

Figure 7154: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

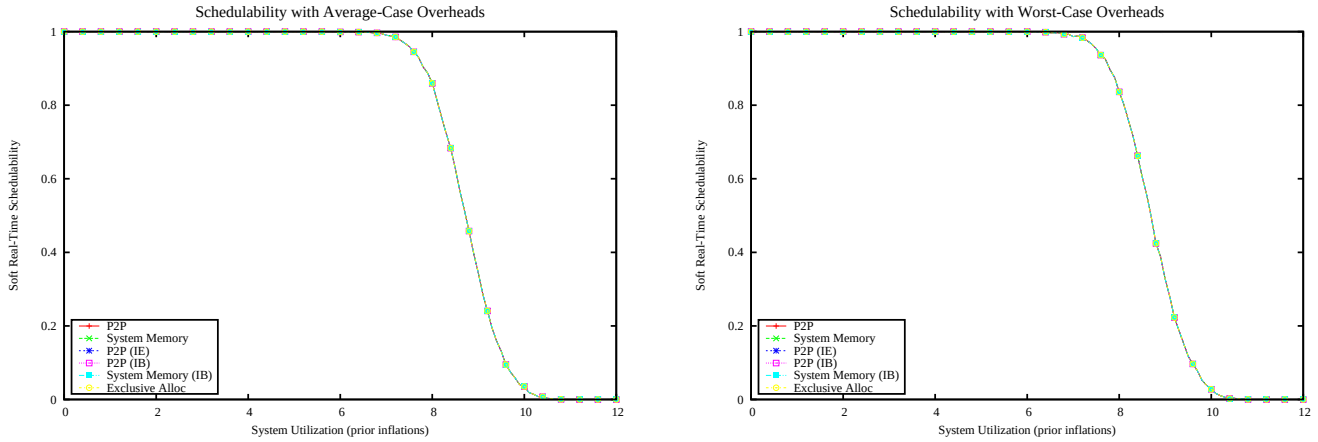

Figure 7155: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

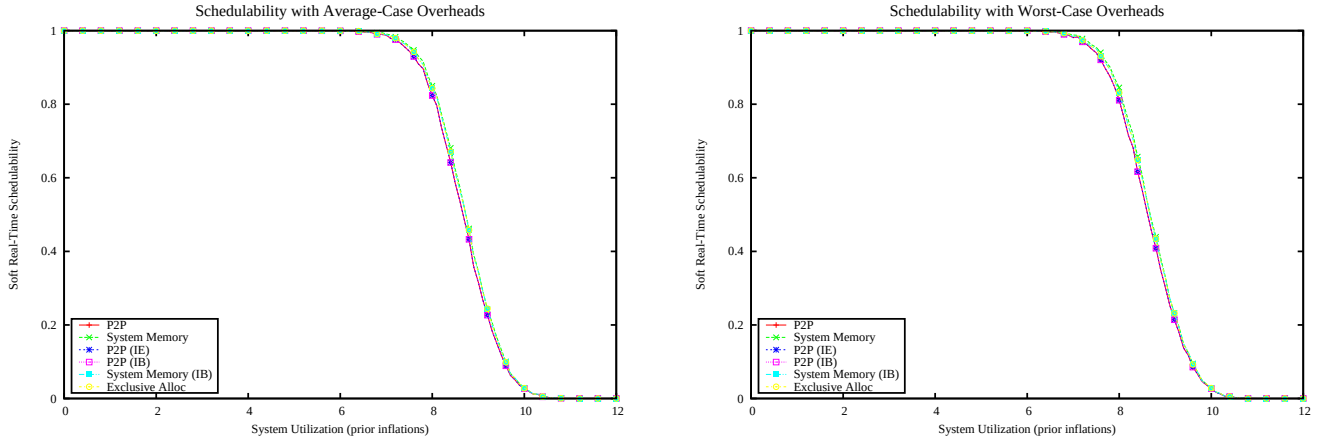

Figure 7156: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

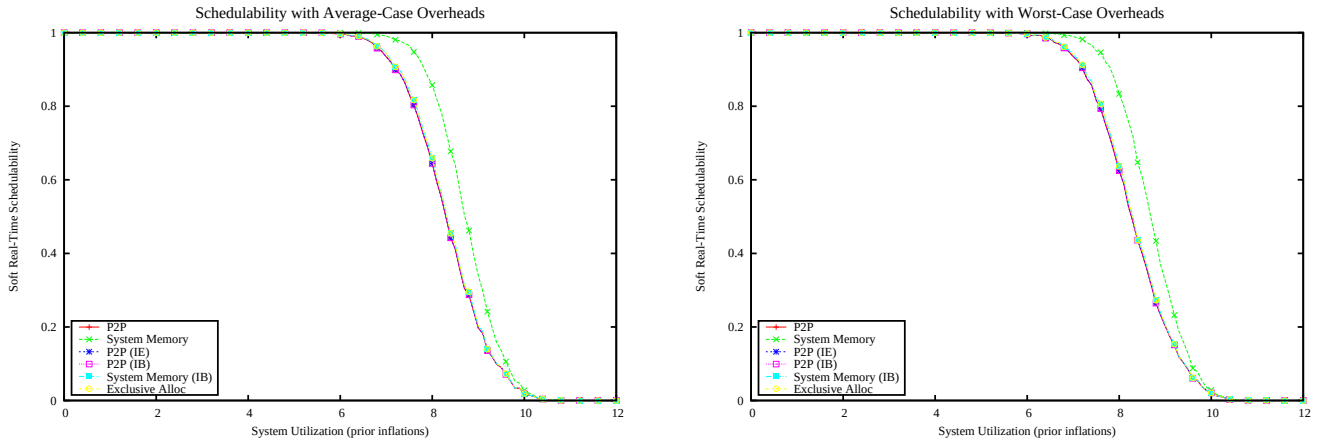

Figure 7157: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

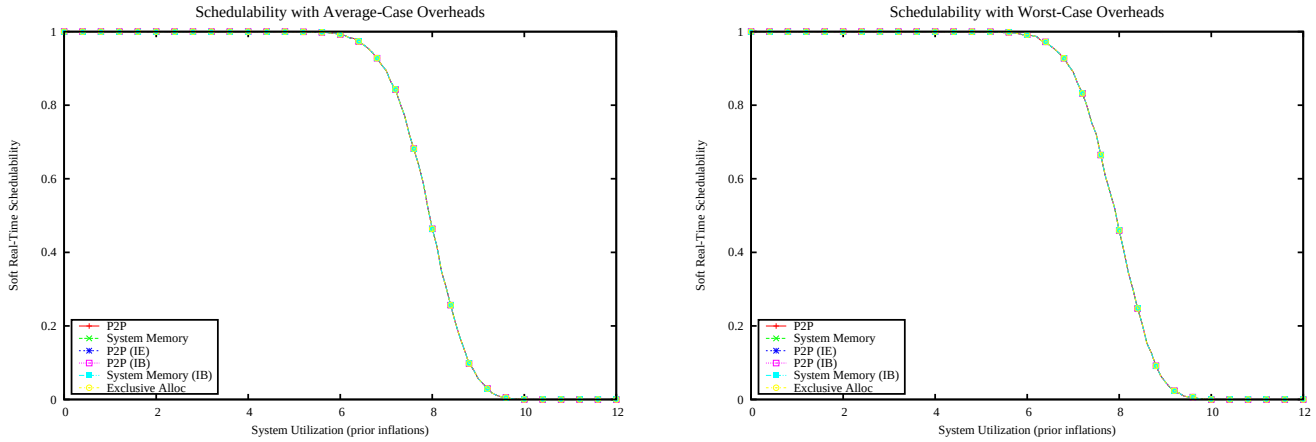

Figure 7158: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

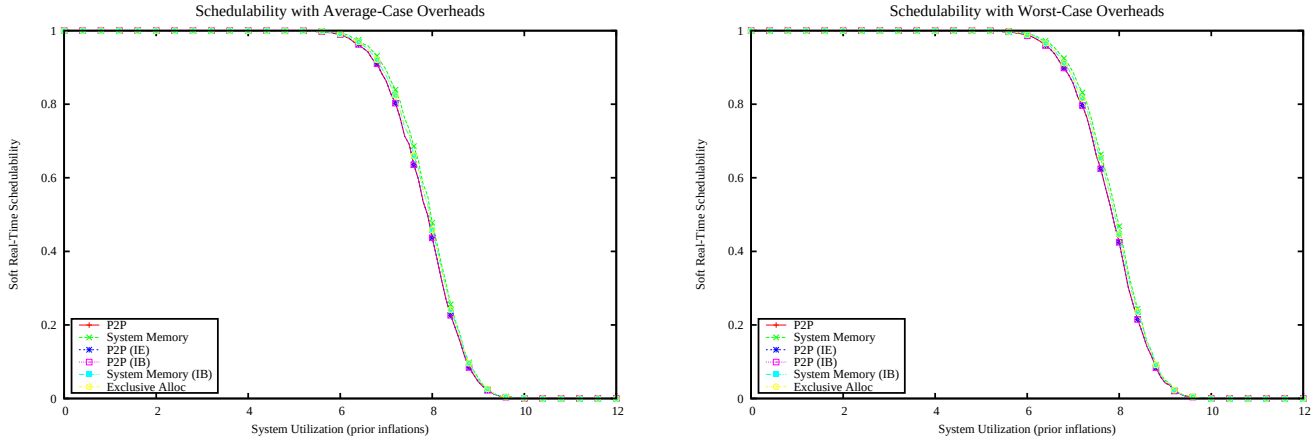

Figure 7159: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

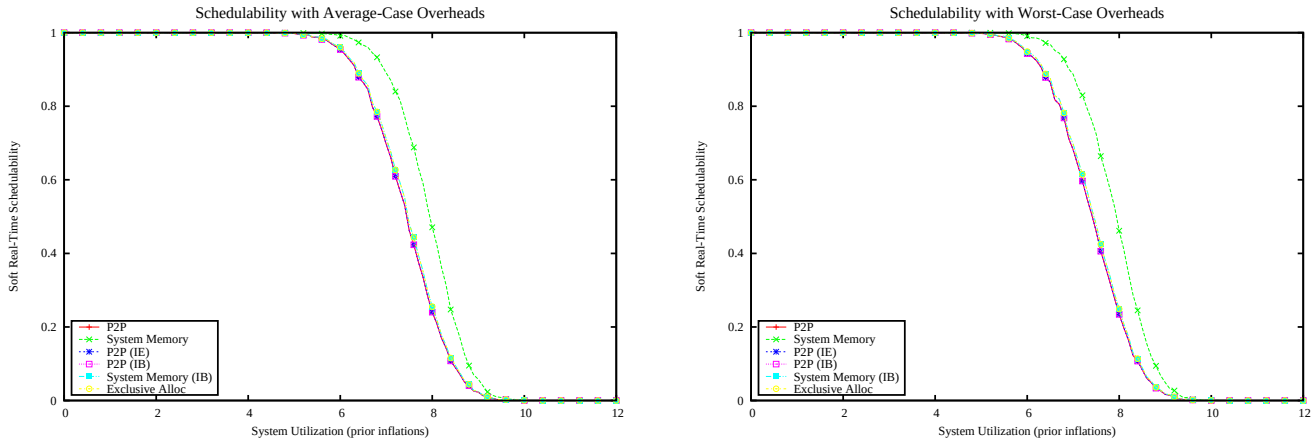

Figure 7160: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

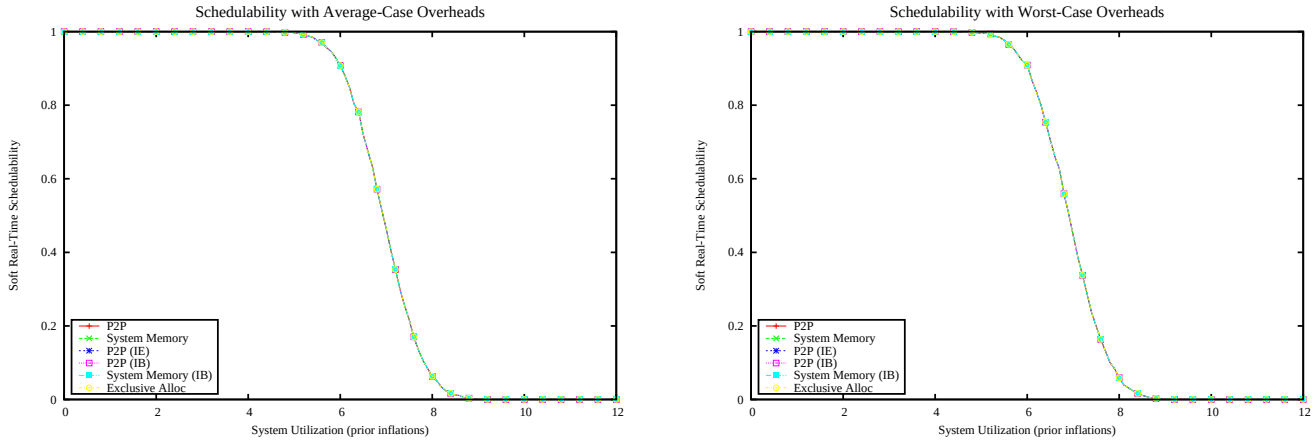

Figure 7161: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

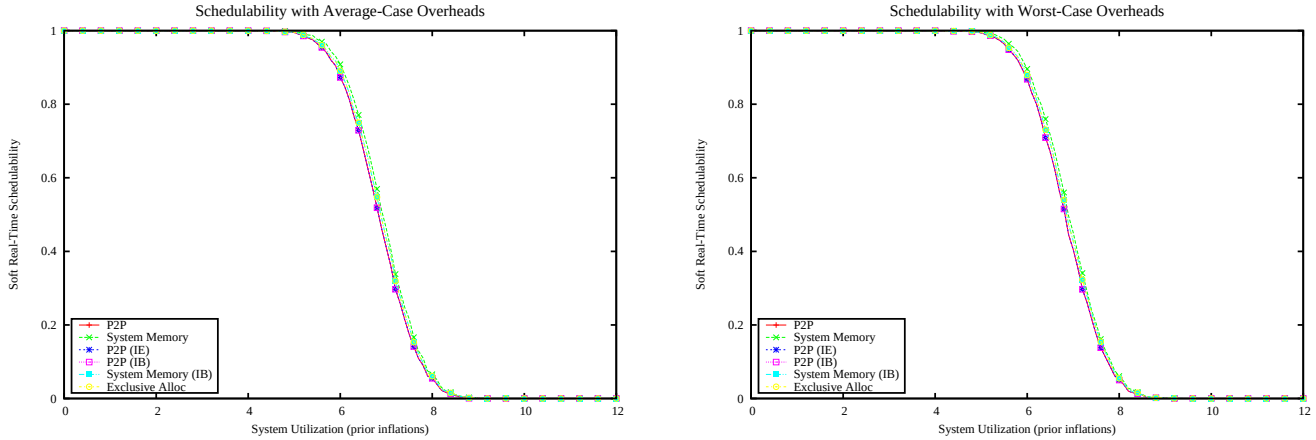

Figure 7162: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

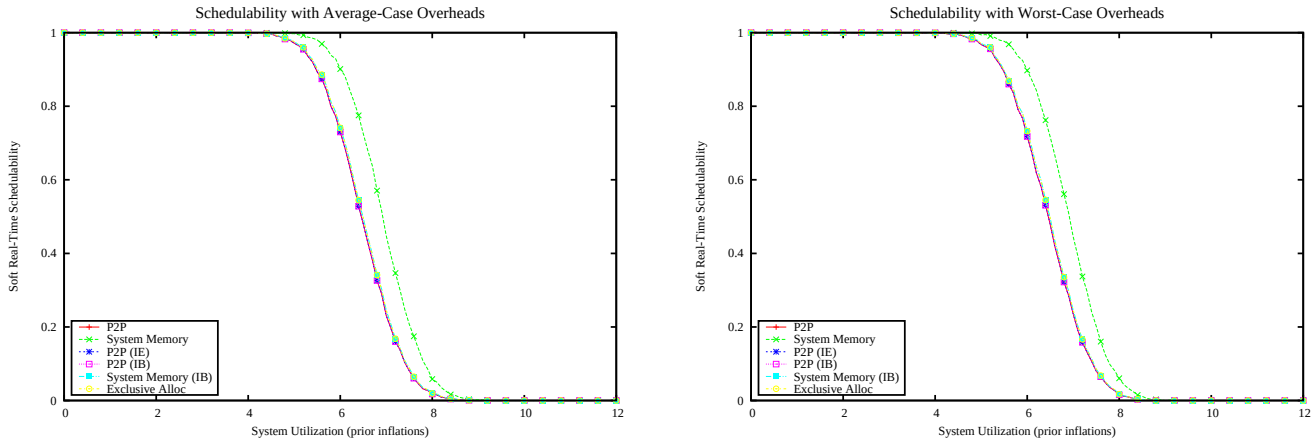

Figure 7163: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

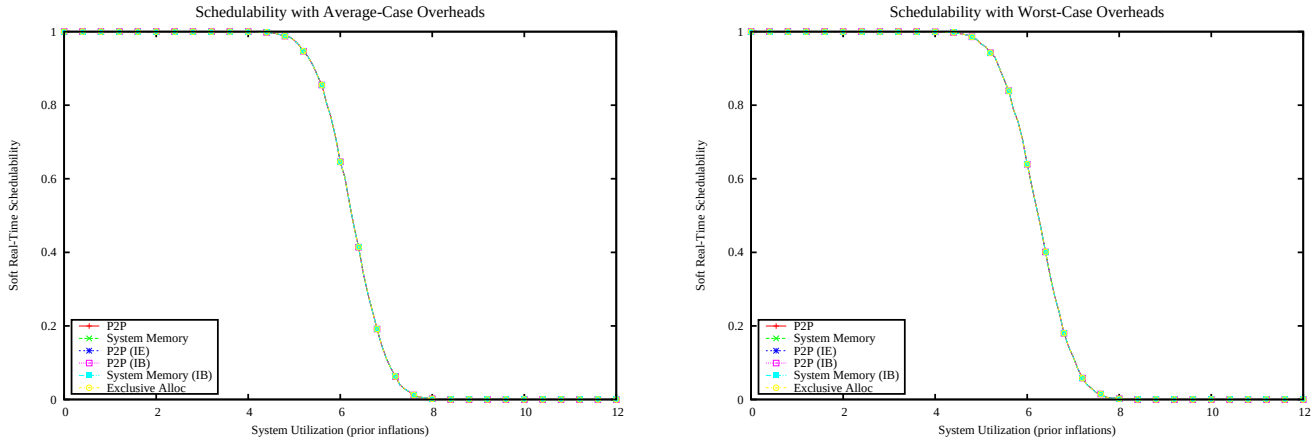

Figure 7164: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

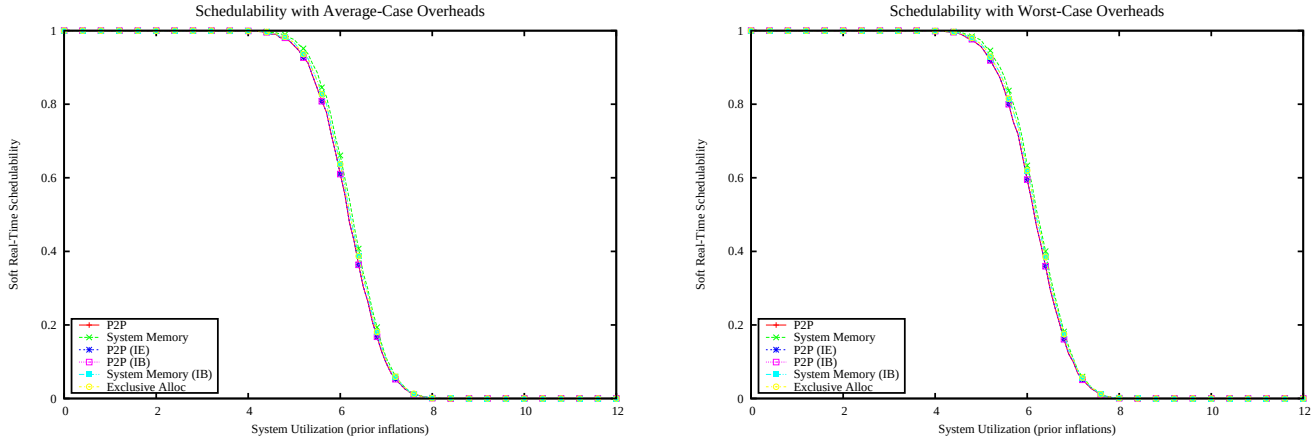

Figure 7165: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

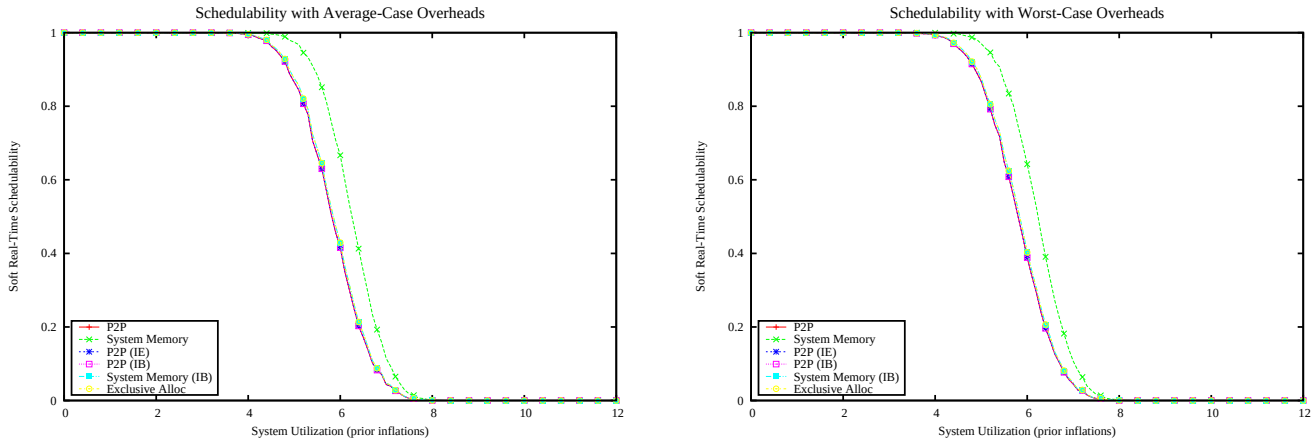

Figure 7166: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

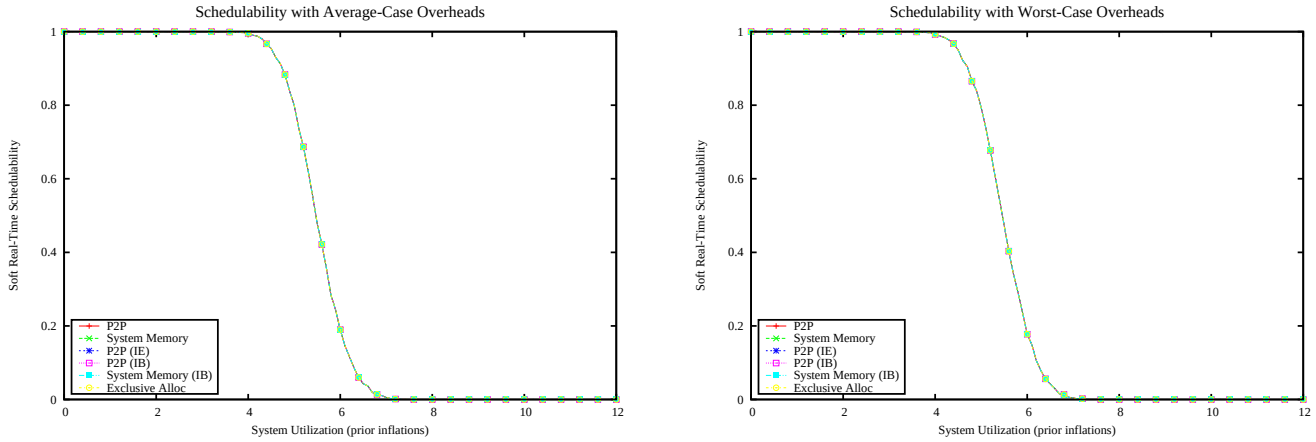

Figure 7167: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

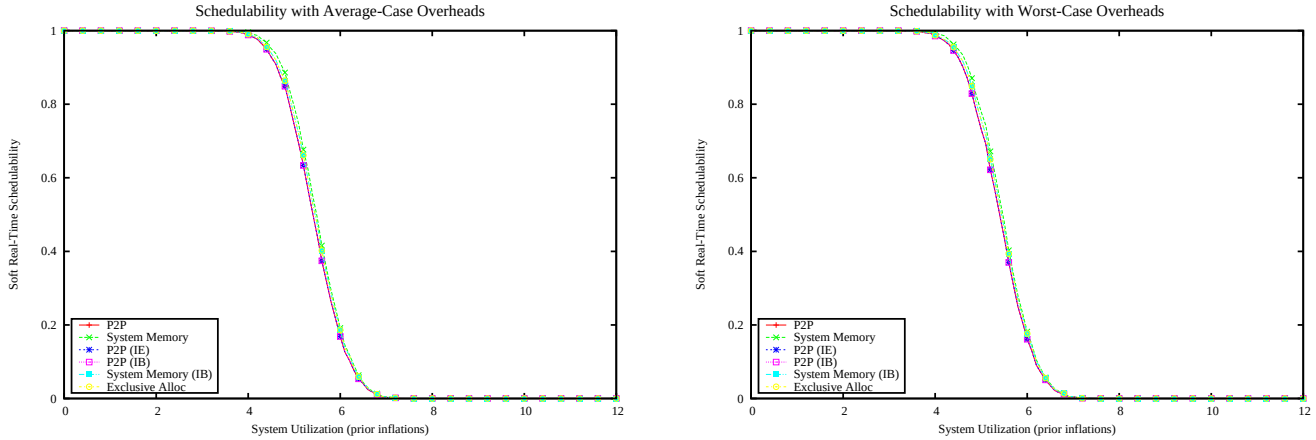

Figure 7168: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

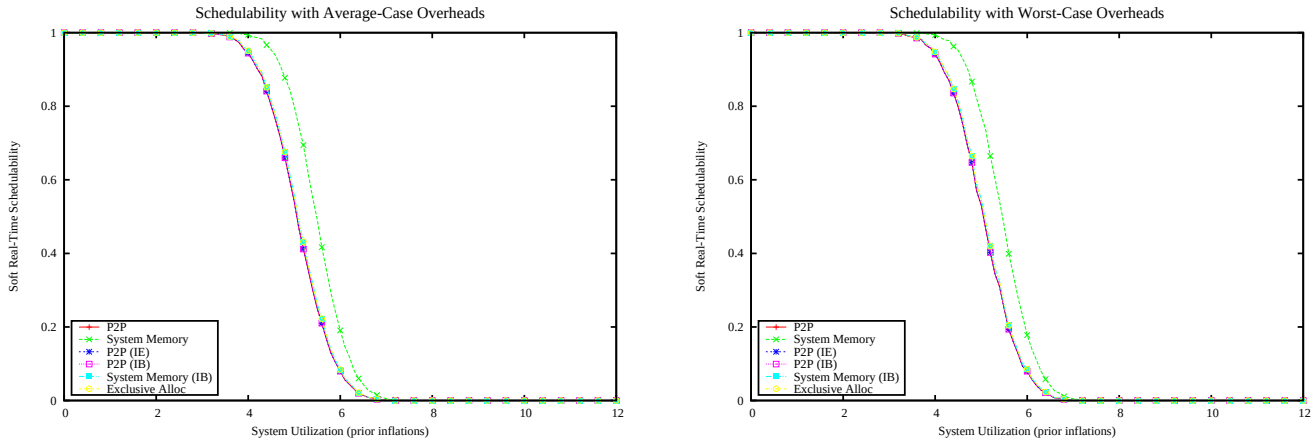

Figure 7169: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

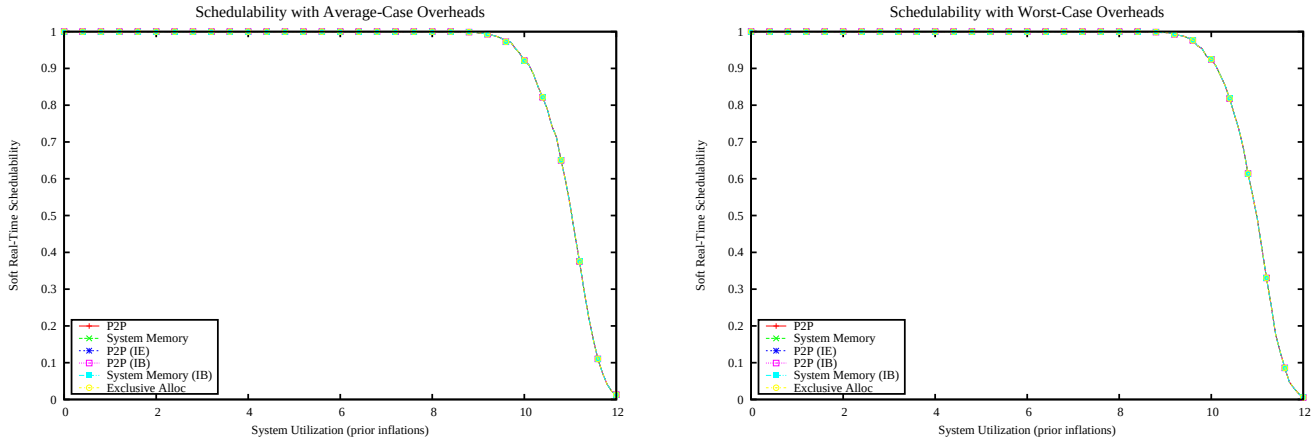

Figure 7170: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

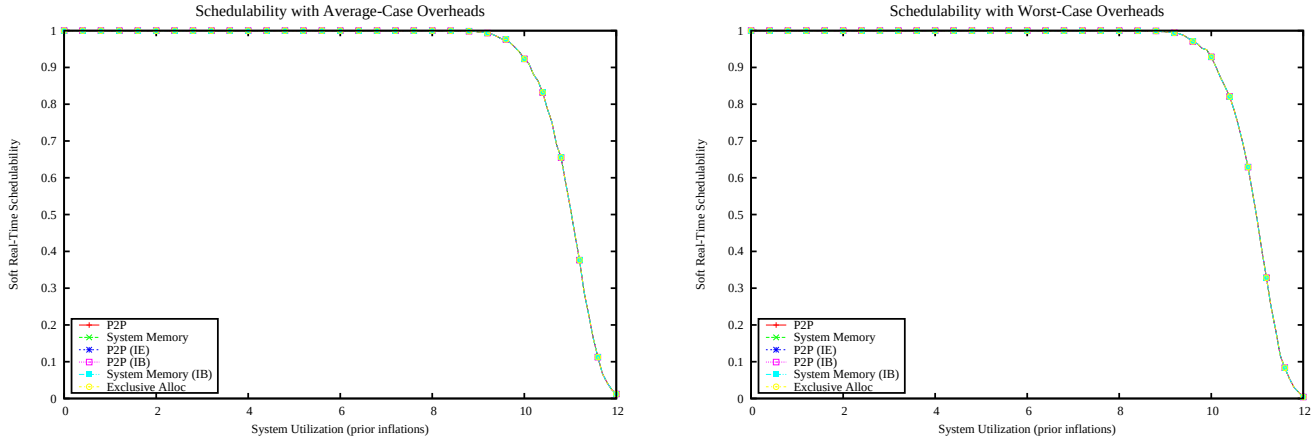

Figure 7171: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

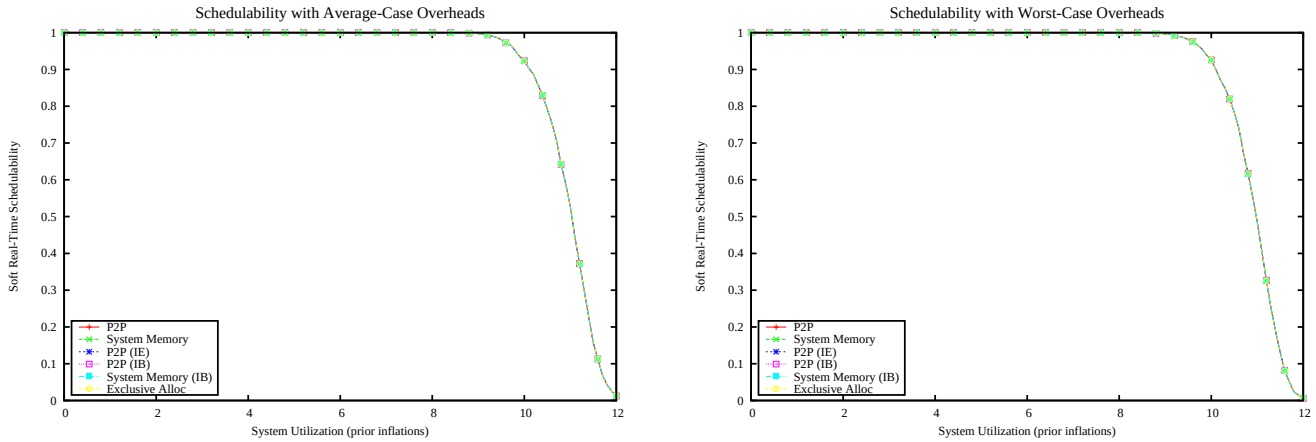

Figure 7172: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

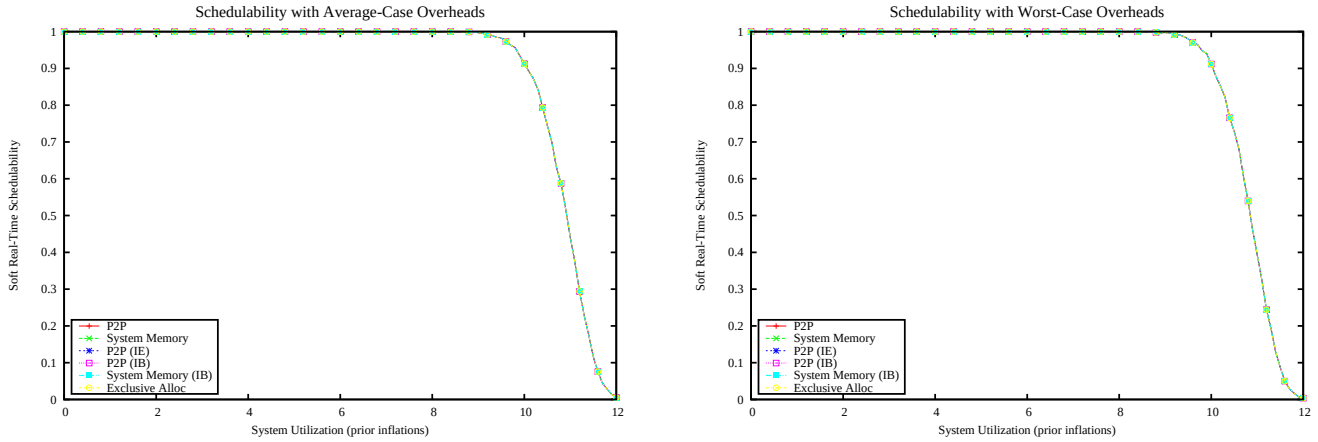

Figure 7173: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

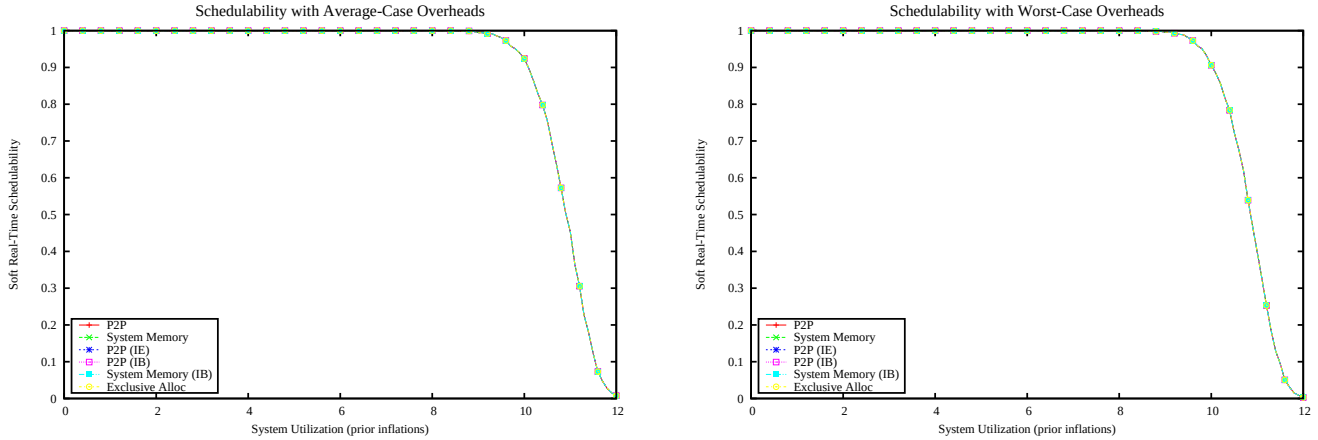

Figure 7174: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

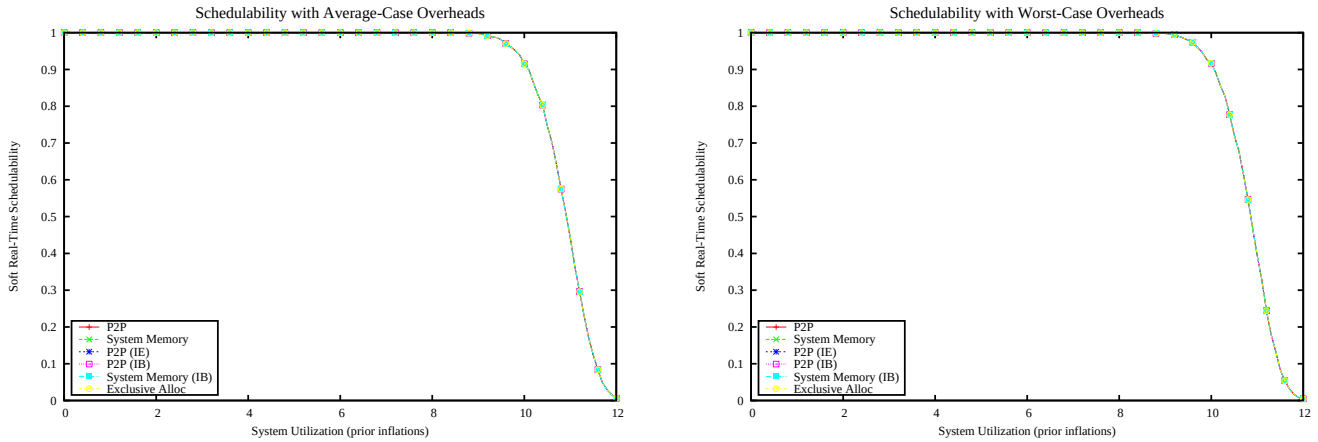

Figure 7175: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

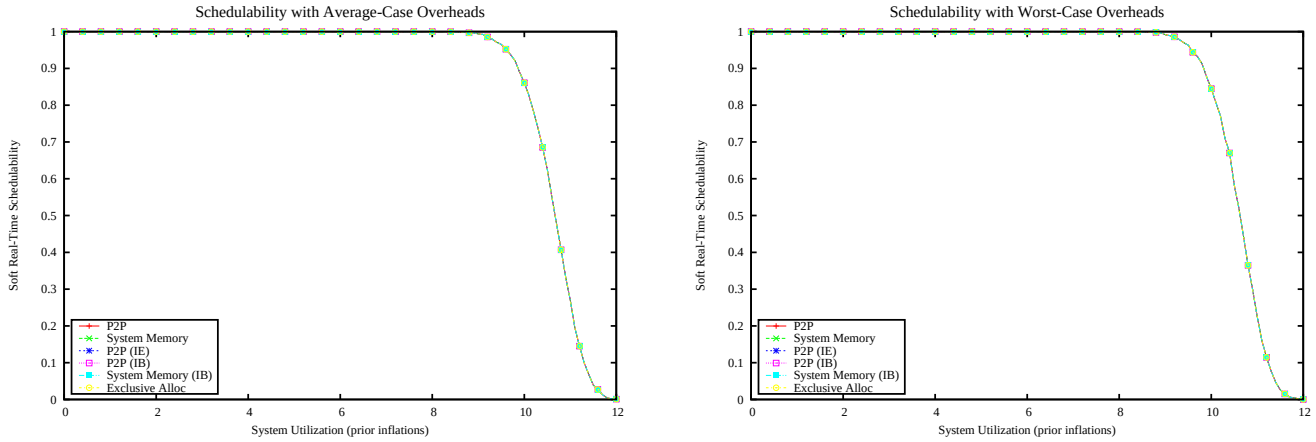

Figure 7176: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

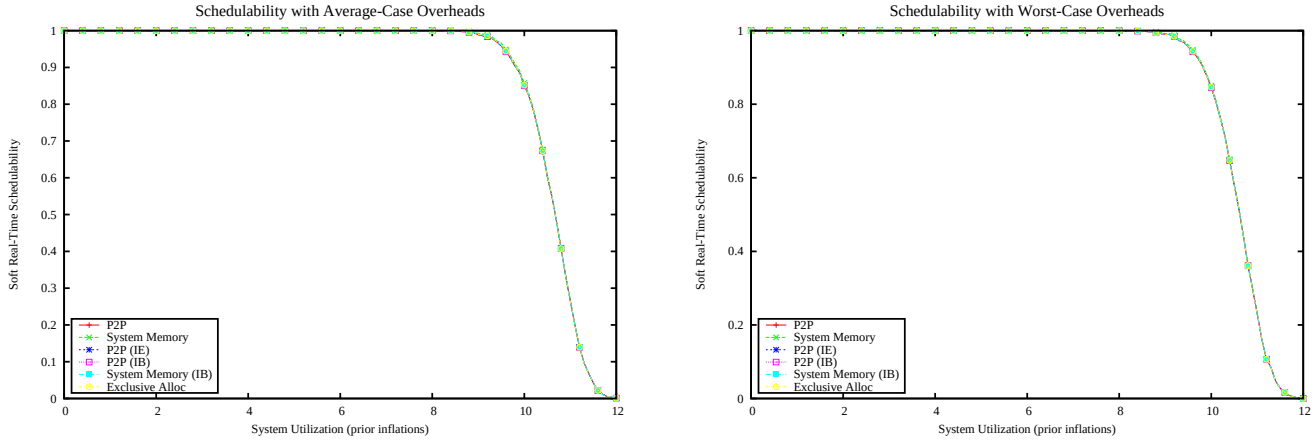

Figure 7177: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

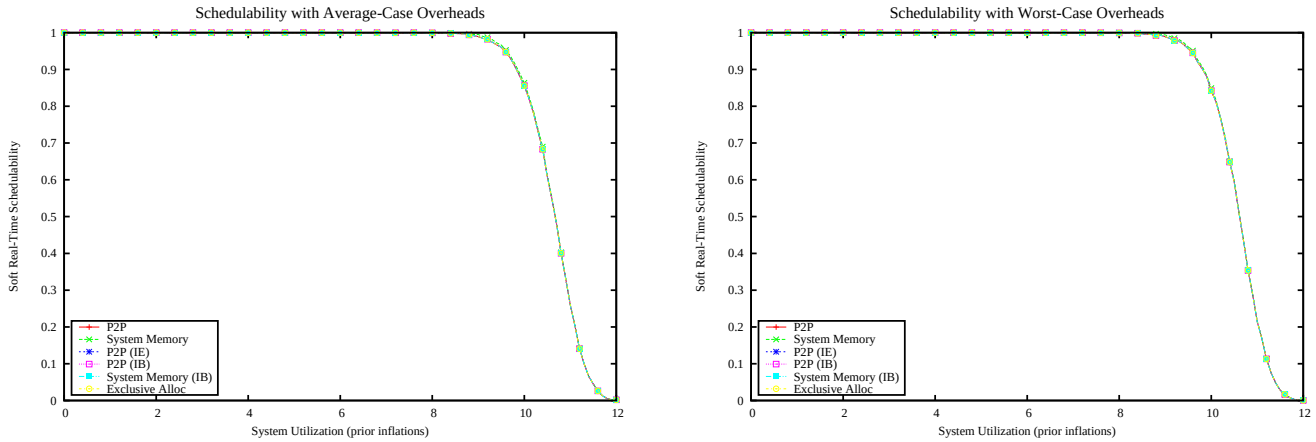

Figure 7178: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

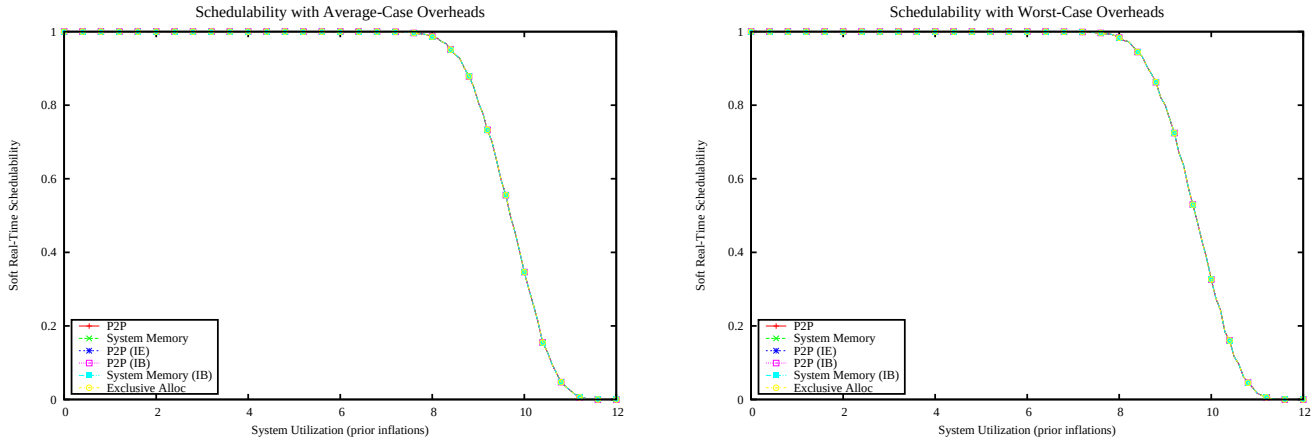

Figure 7179: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

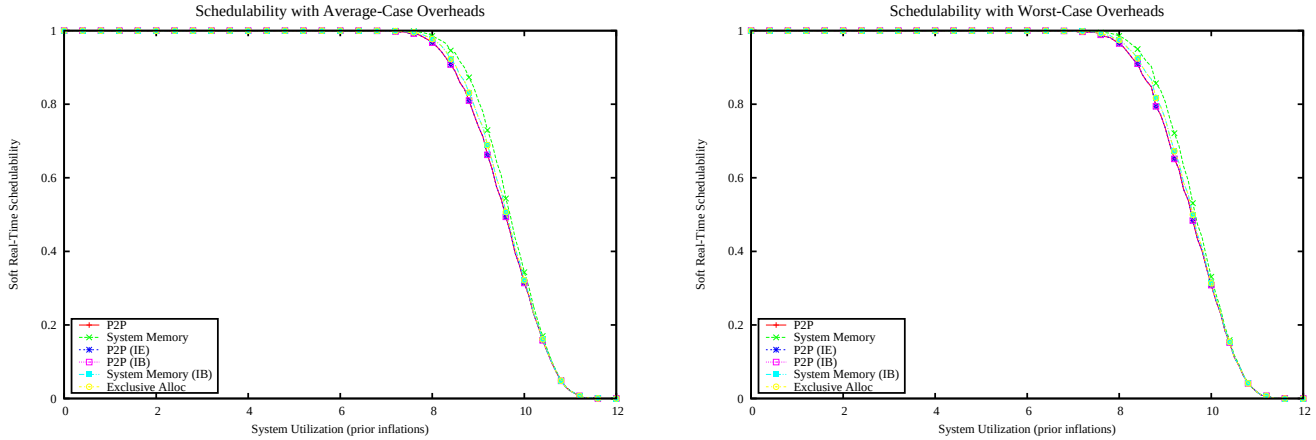

Figure 7180: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

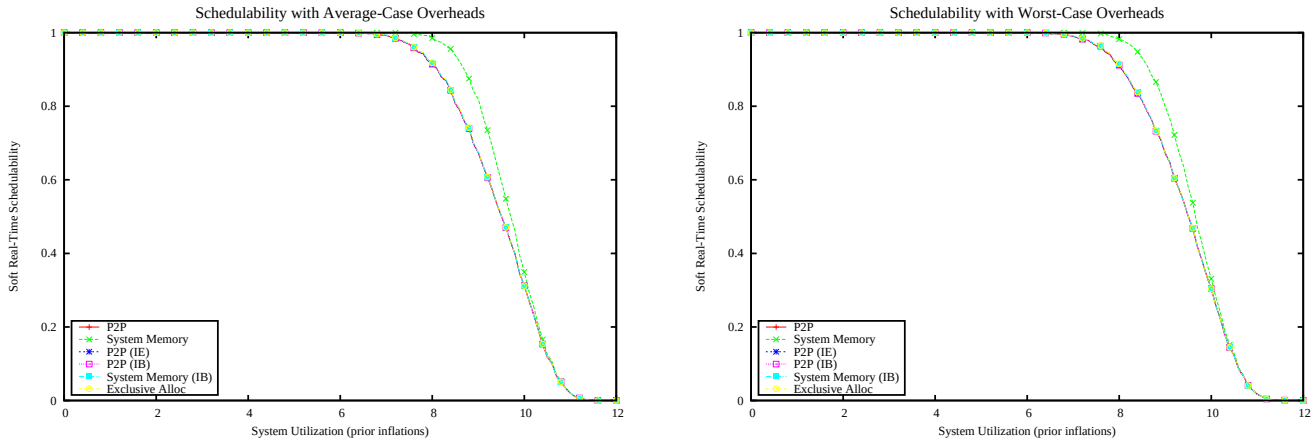

Figure 7181: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

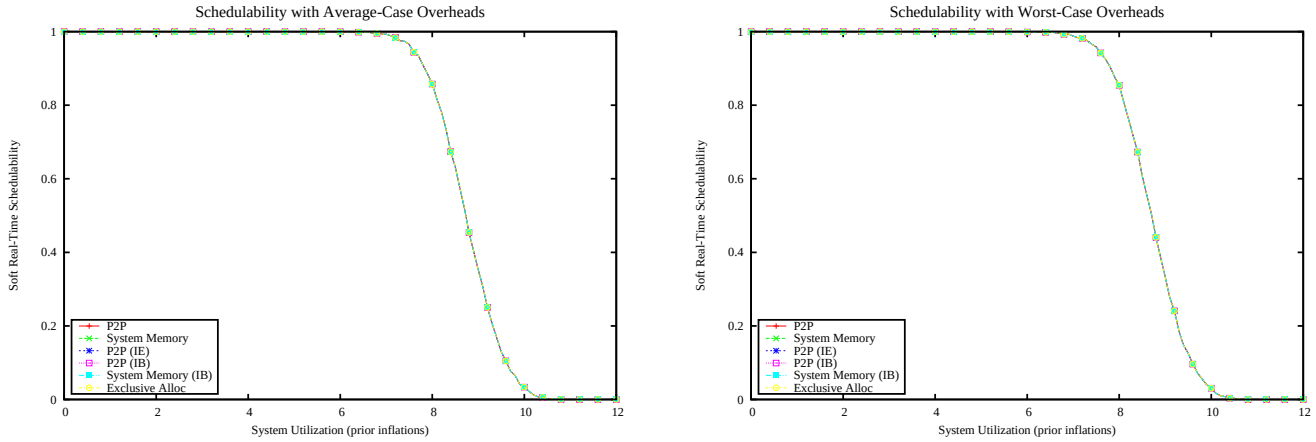

Figure 7182: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

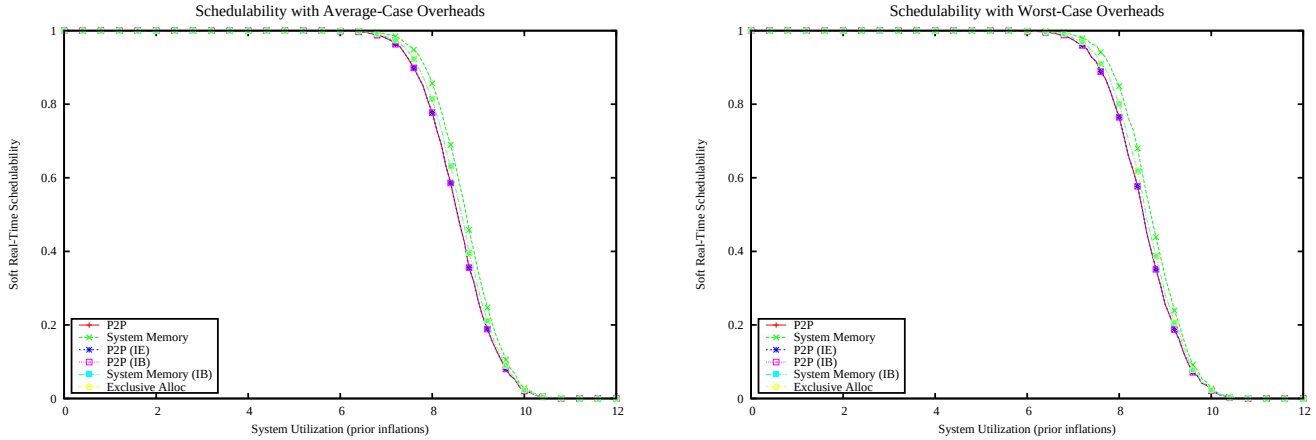

Figure 7183: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

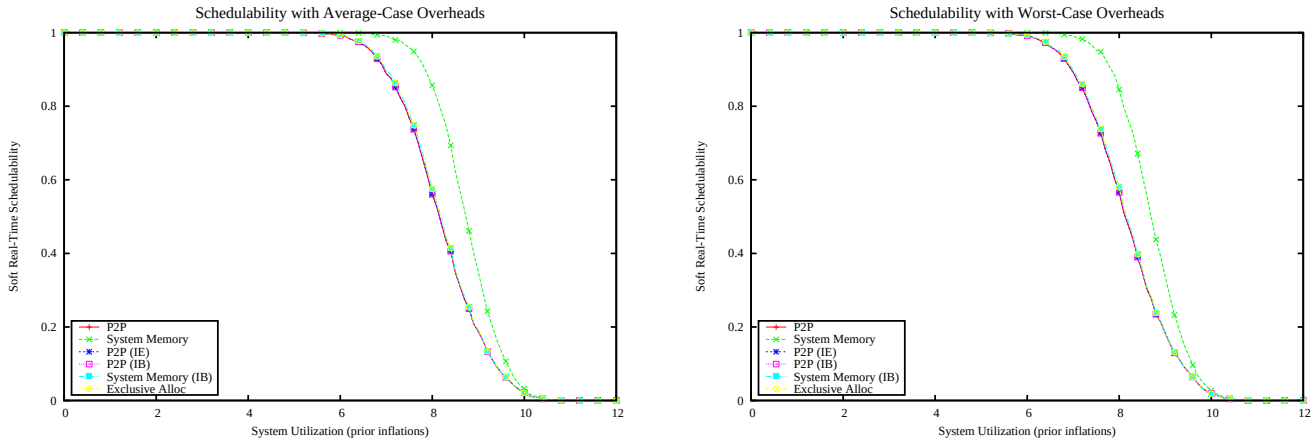

Figure 7184: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

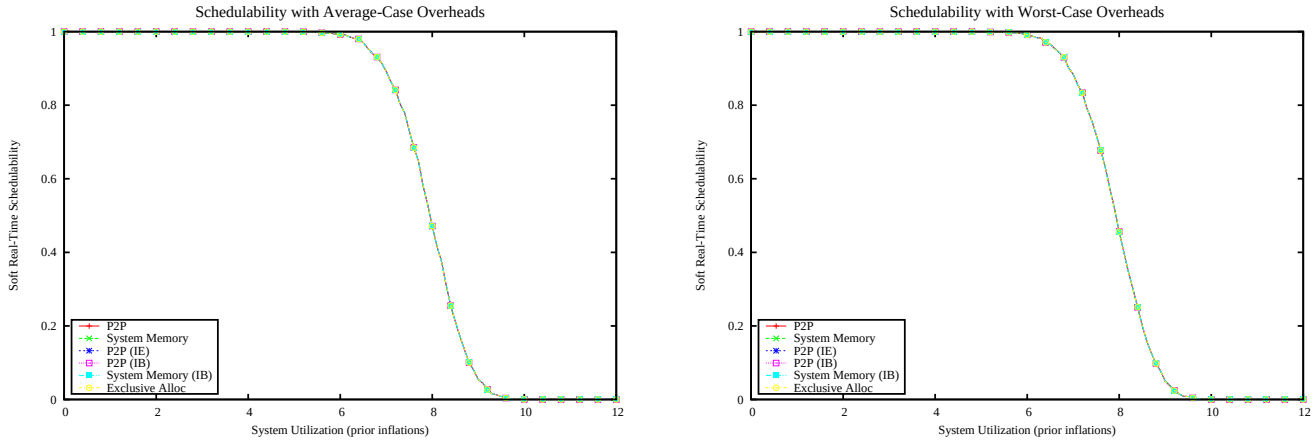

Figure 7185: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

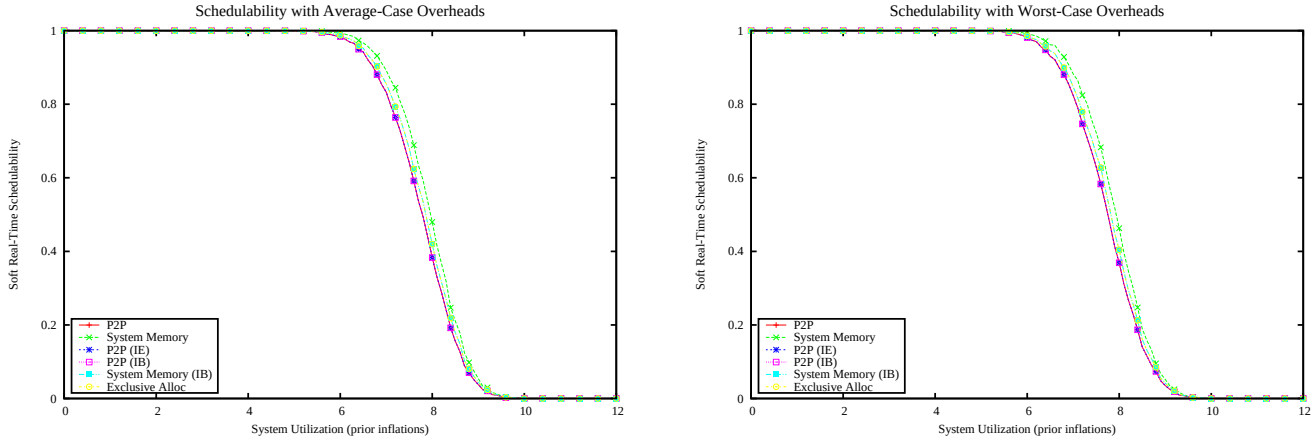

Figure 7186: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

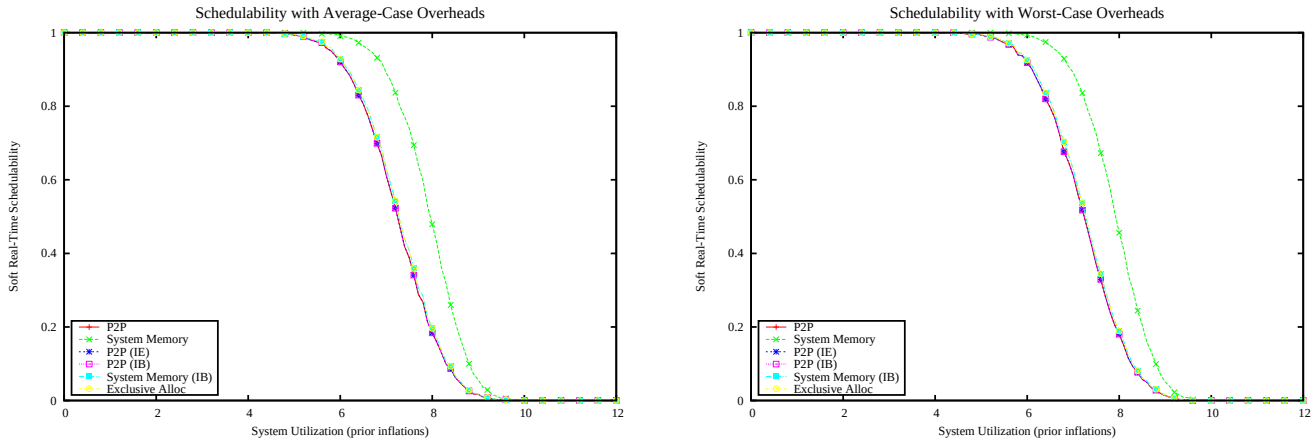

Figure 7187: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

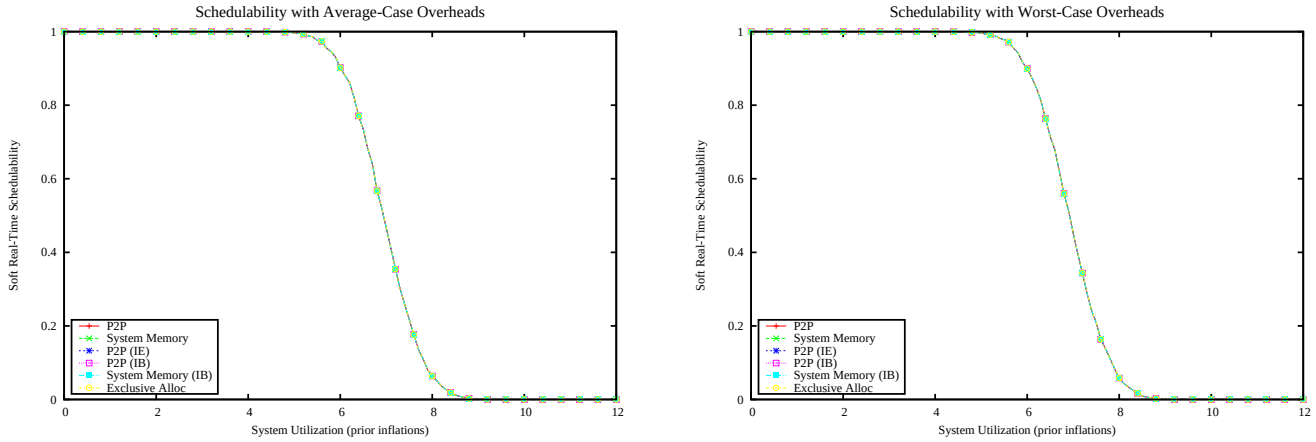

Figure 7188: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

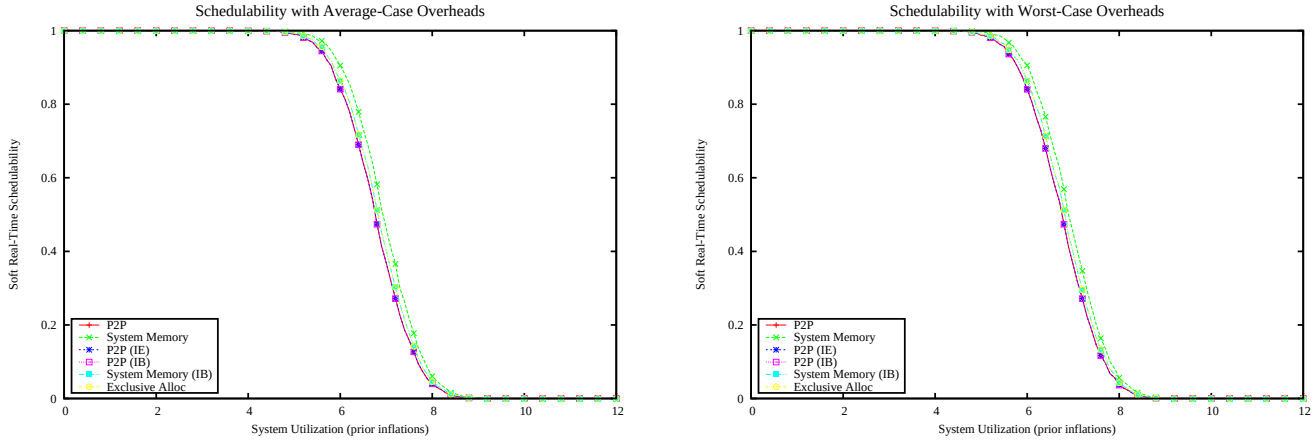

Figure 7189: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

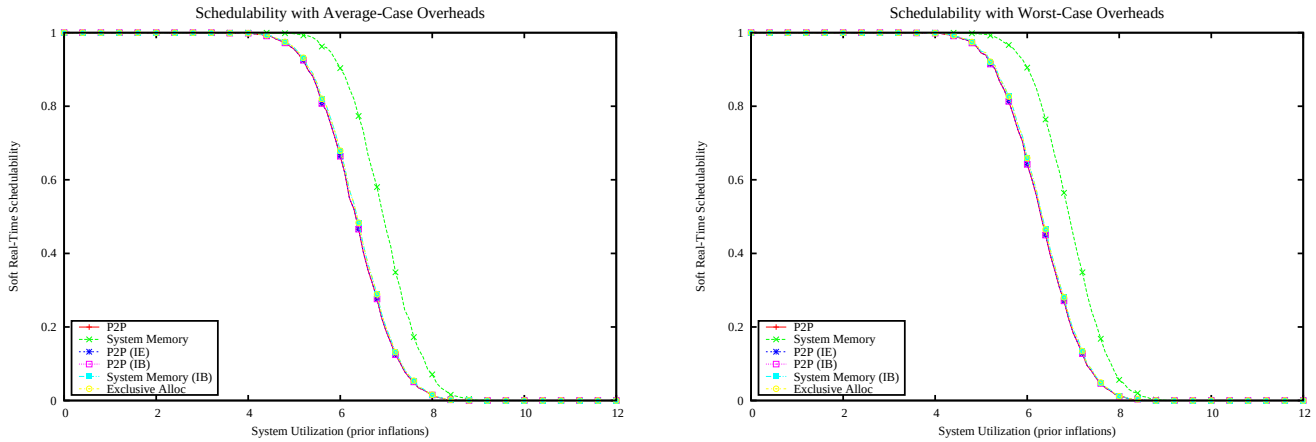

Figure 7190: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

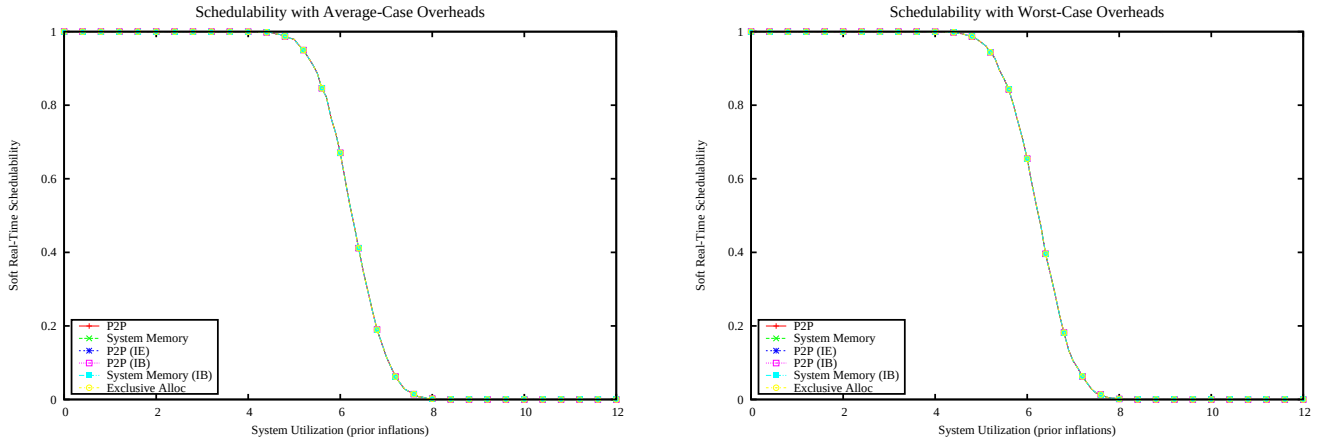

Figure 7191: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

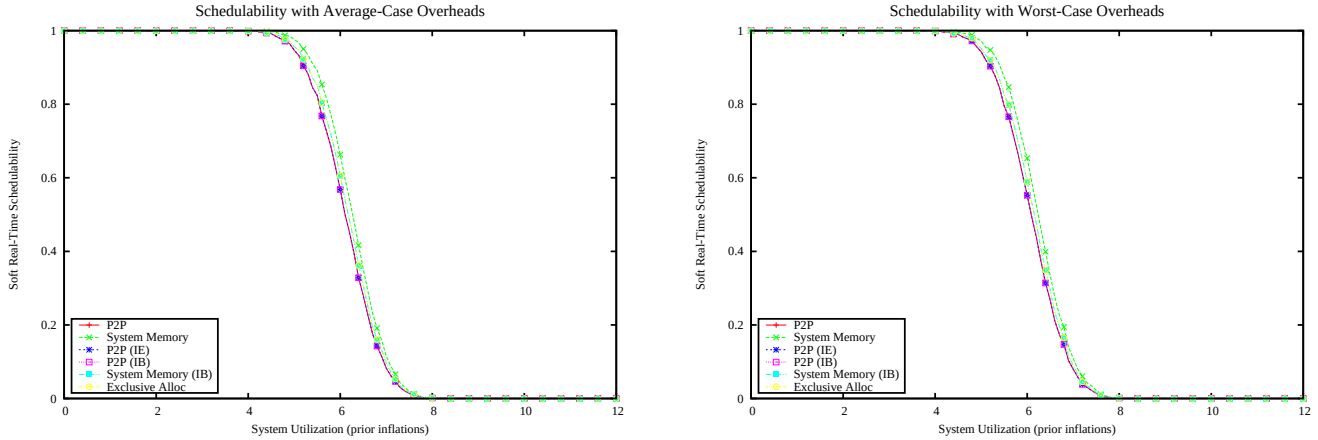

Figure 7192: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

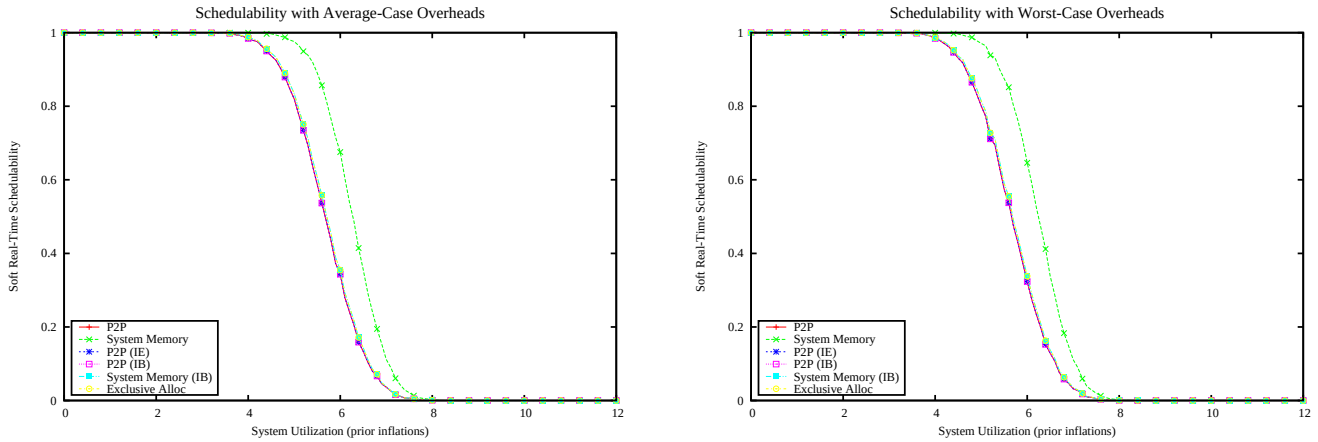

Figure 7193: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

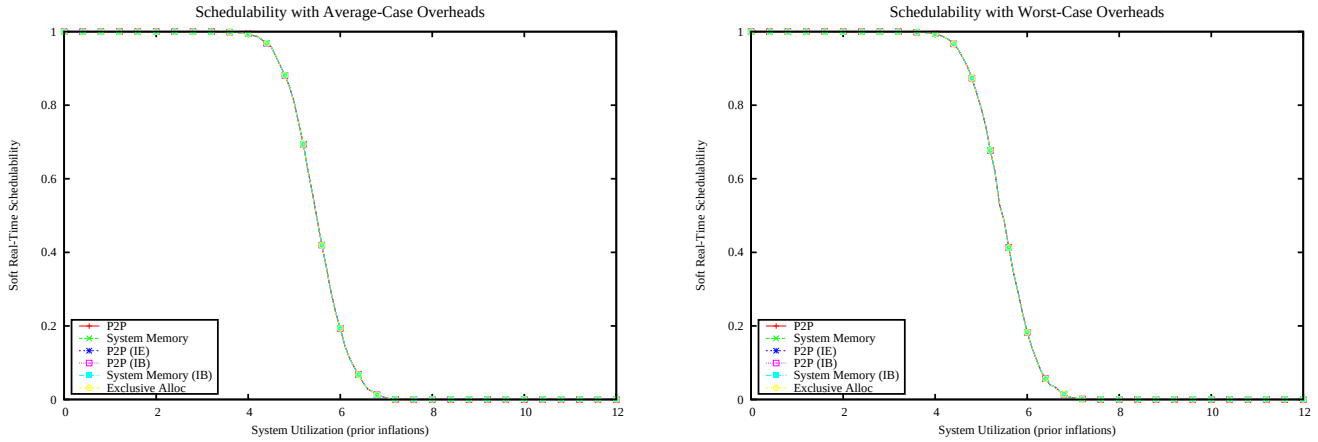

Figure 7194: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

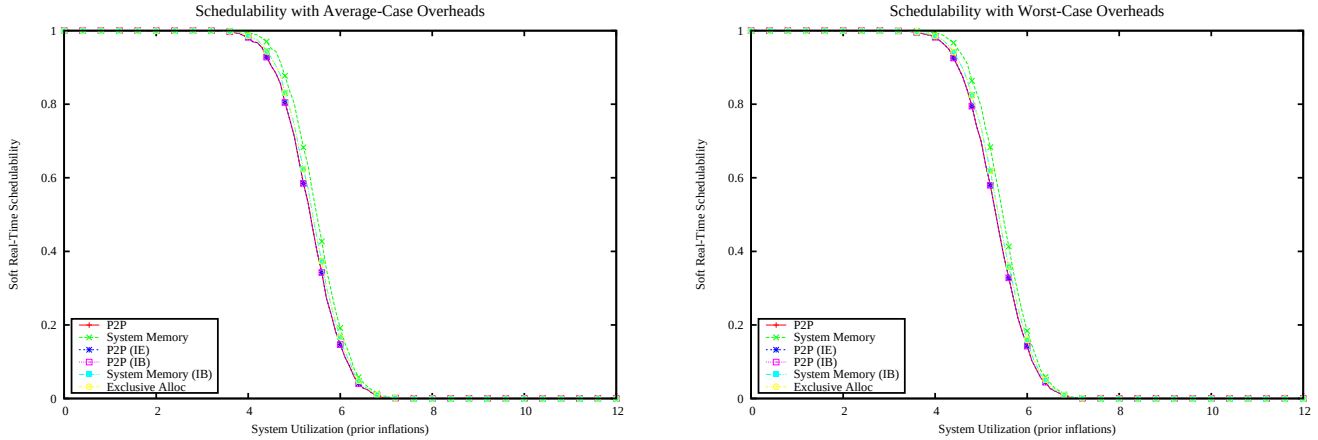

Figure 7195: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

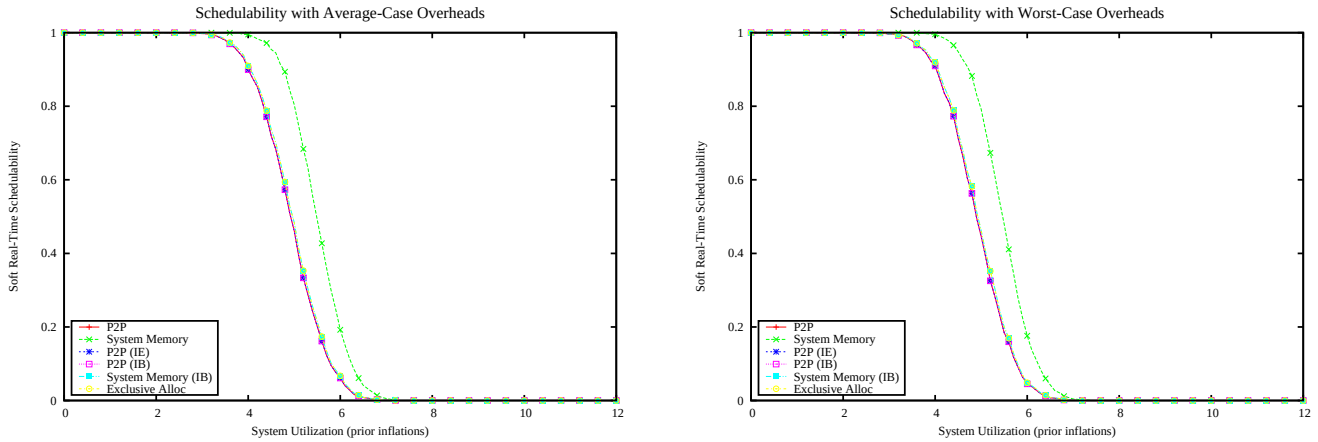

Figure 7196: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

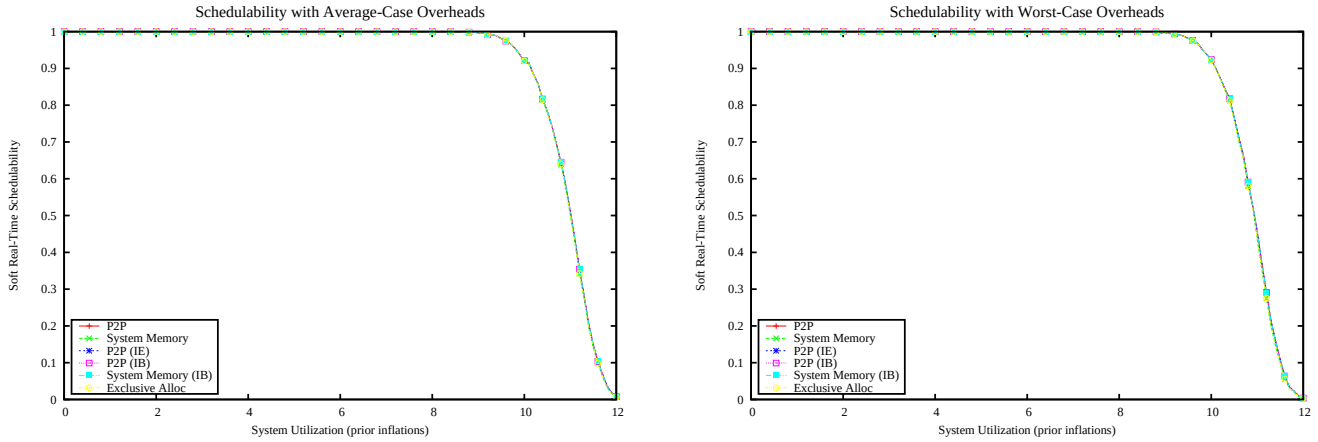

Figure 7197: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

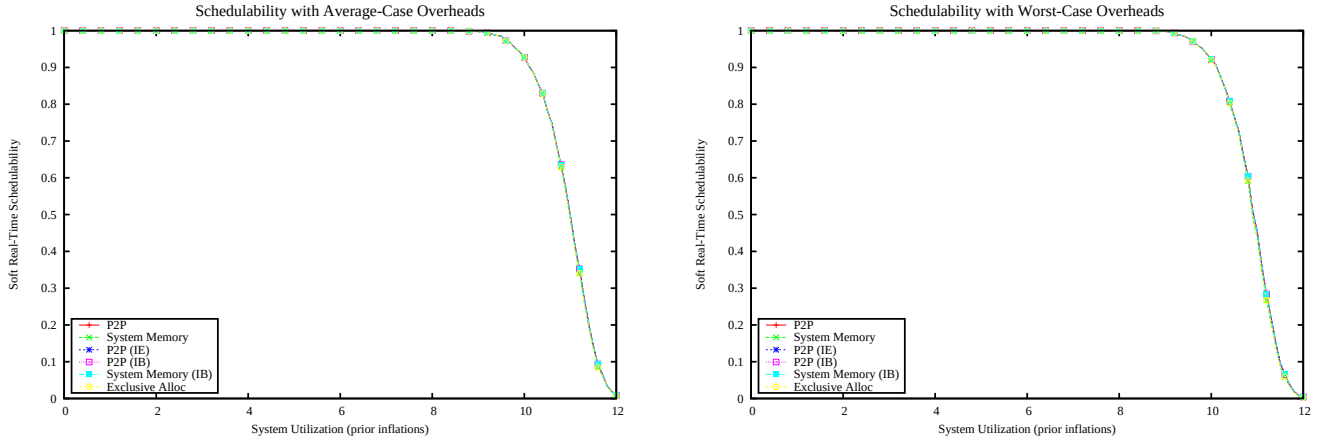

Figure 7198: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

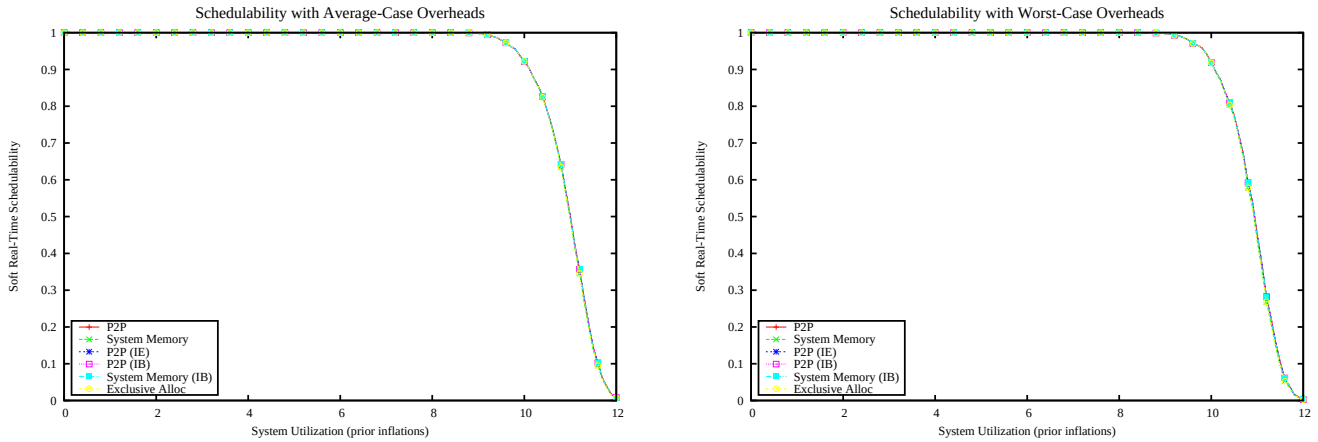

Figure 7199: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

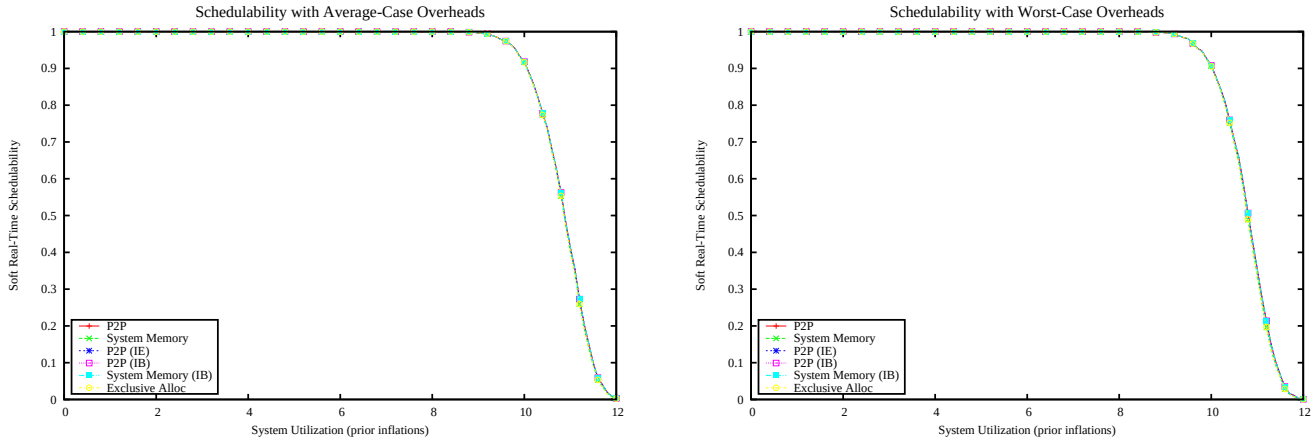

Figure 7200: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

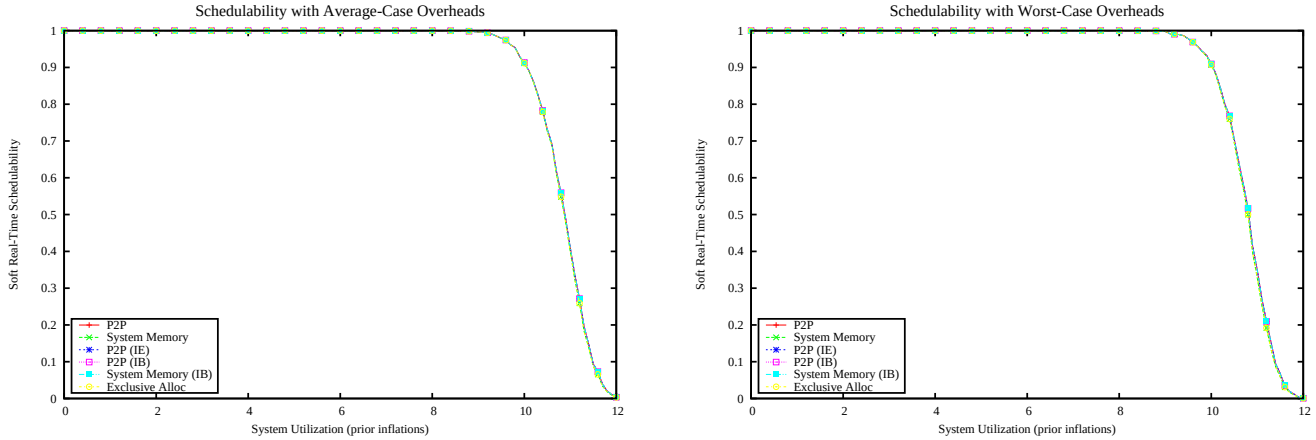

Figure 7201: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

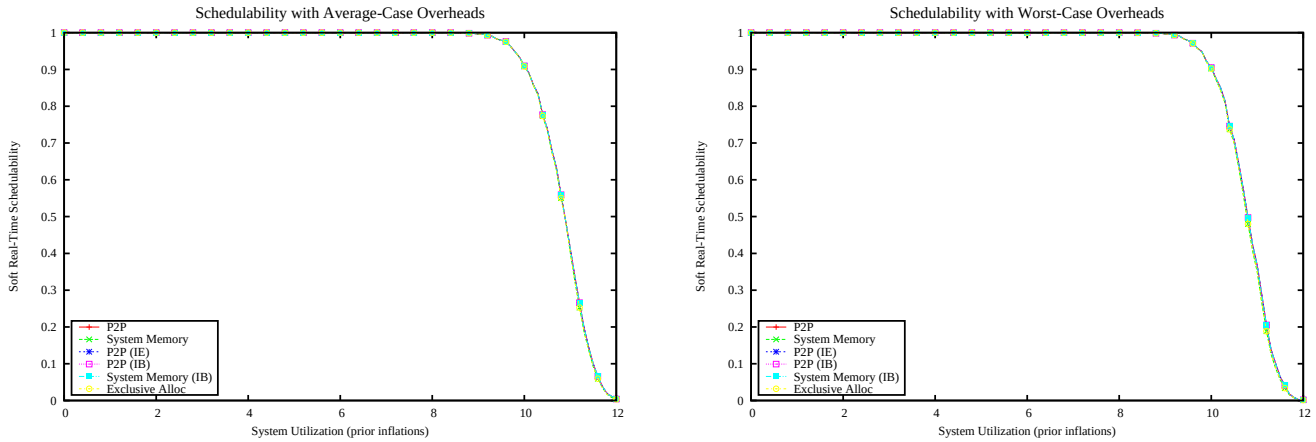

Figure 7202: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

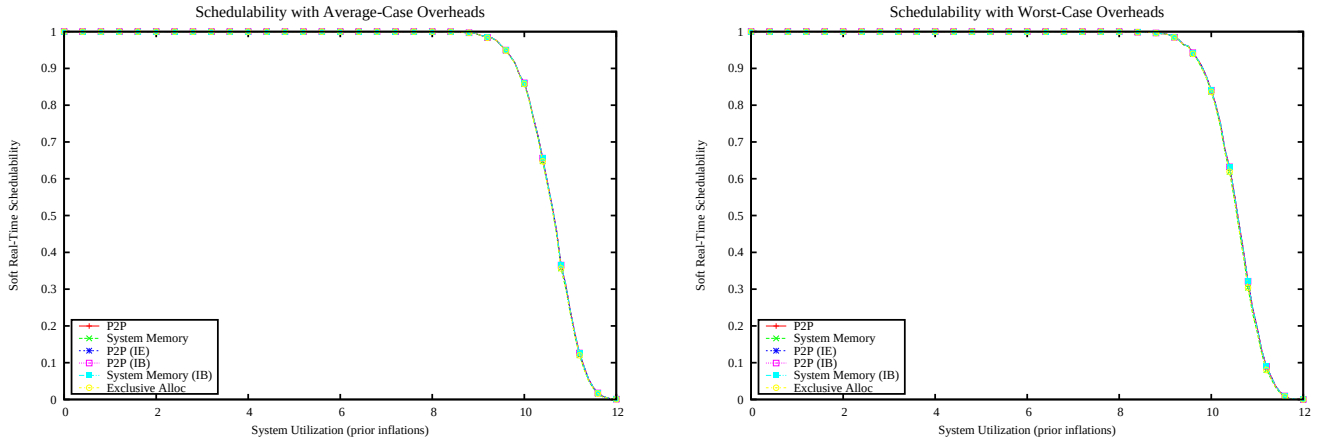

Figure 7203: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

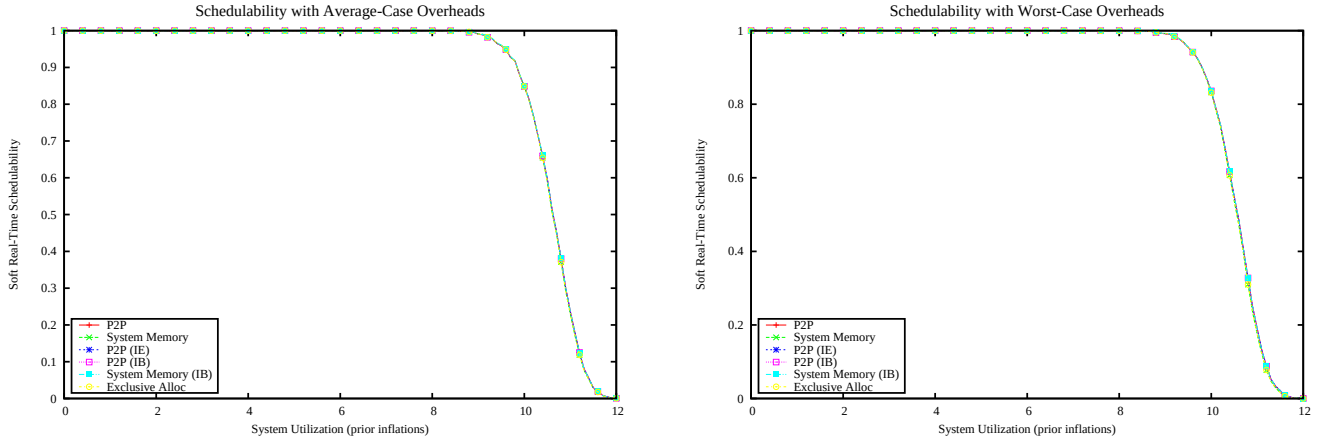

Figure 7204: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

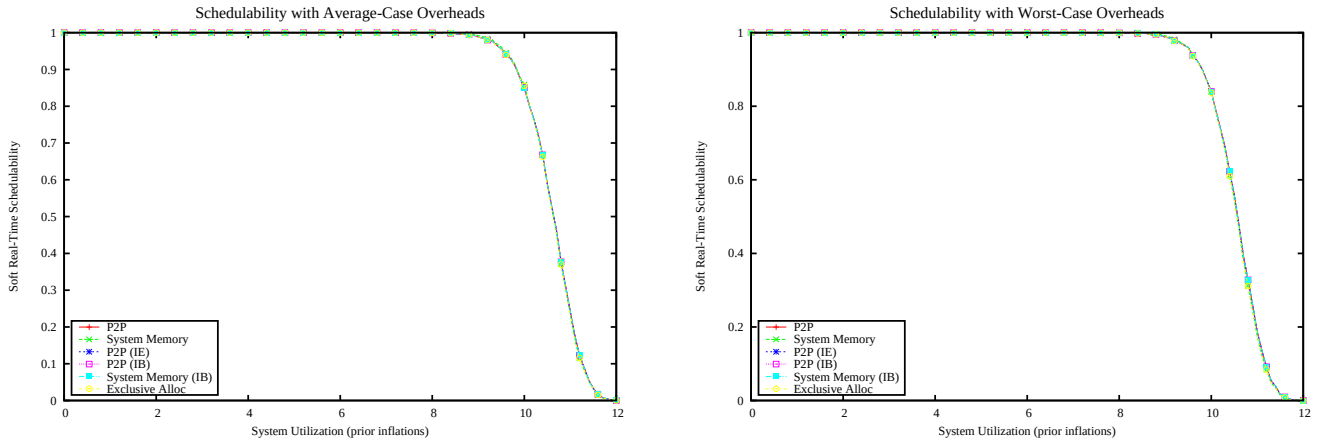

Figure 7205: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

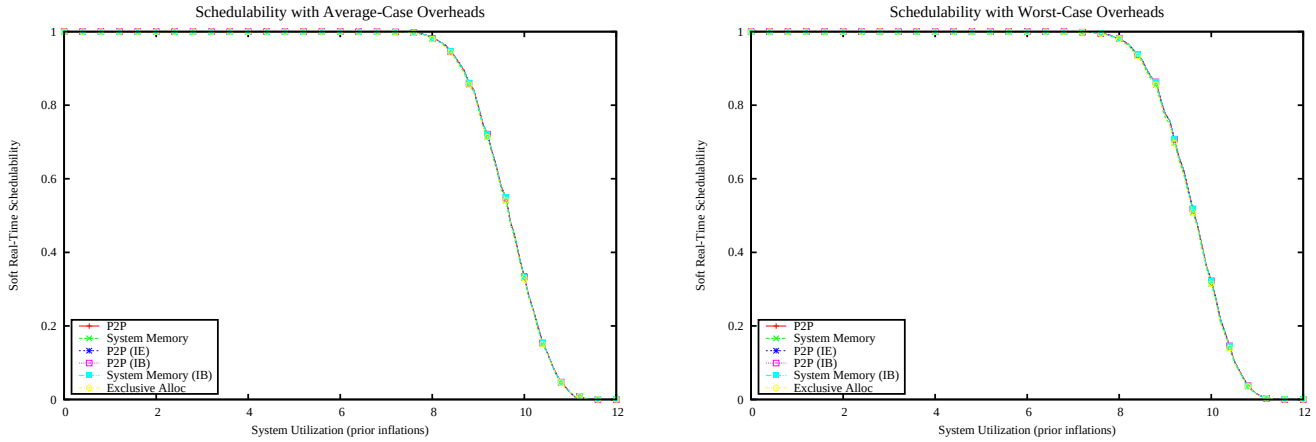

Figure 7206: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

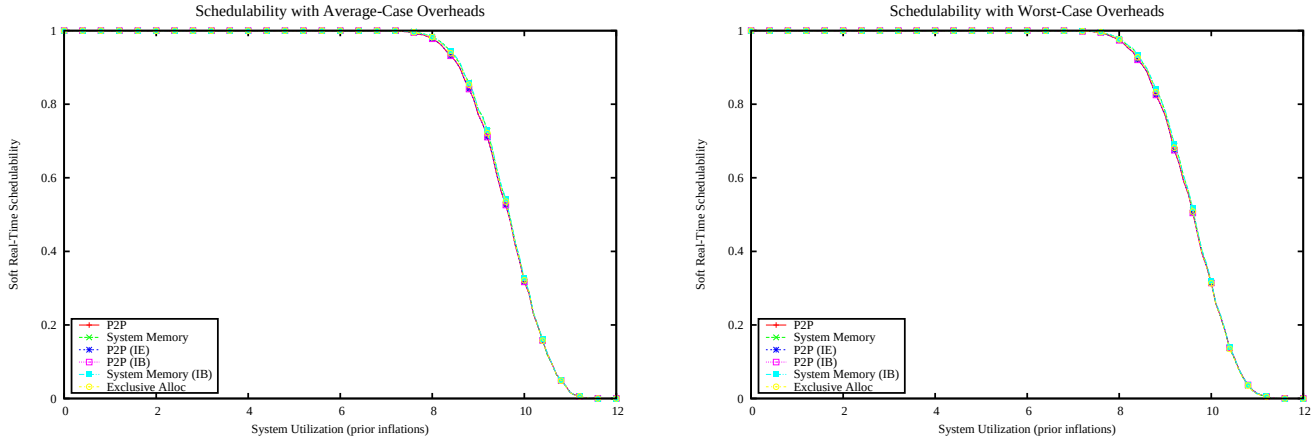

Figure 7207: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

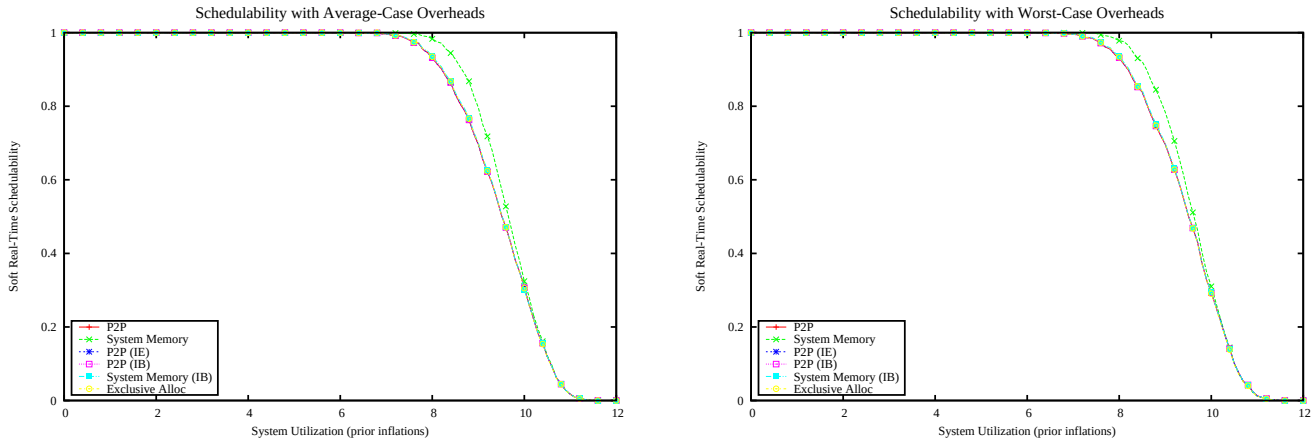

Figure 7208: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

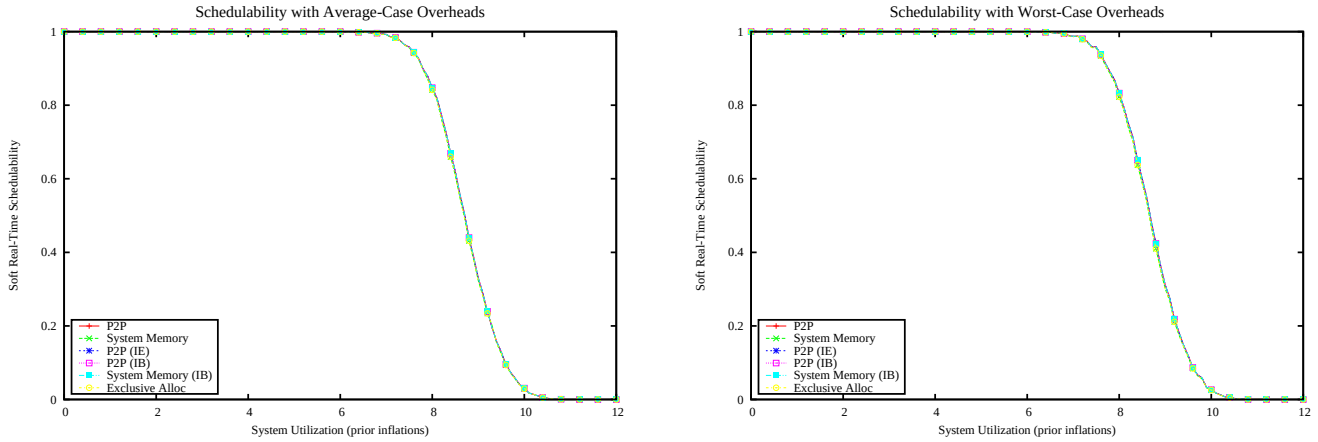

Figure 7209: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

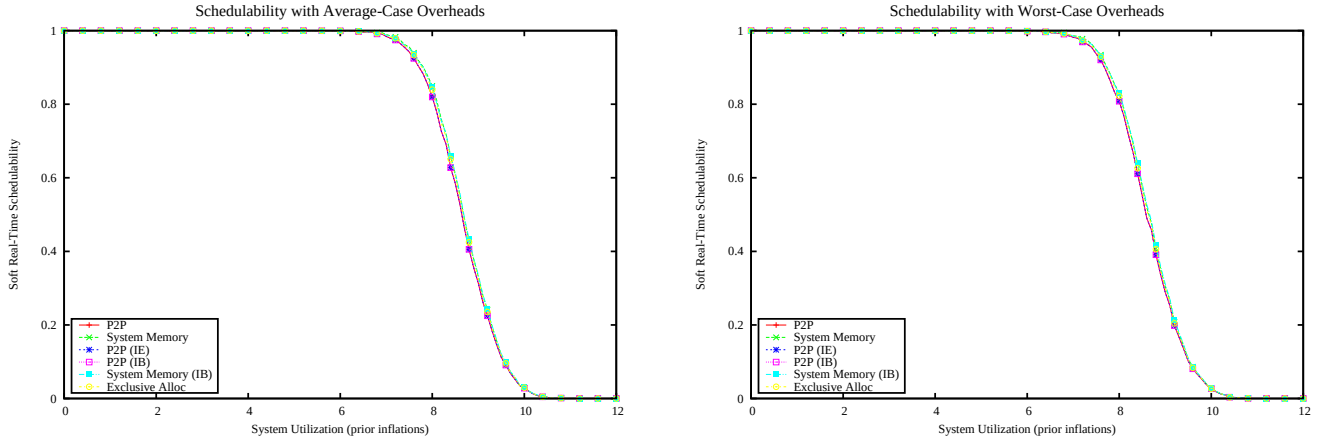

Figure 7210: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

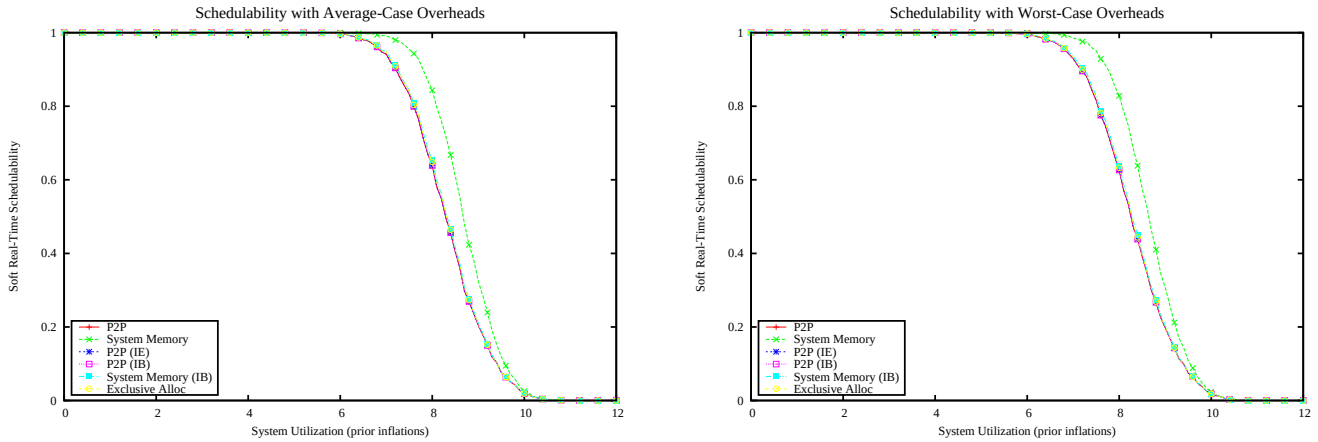

Figure 7211: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

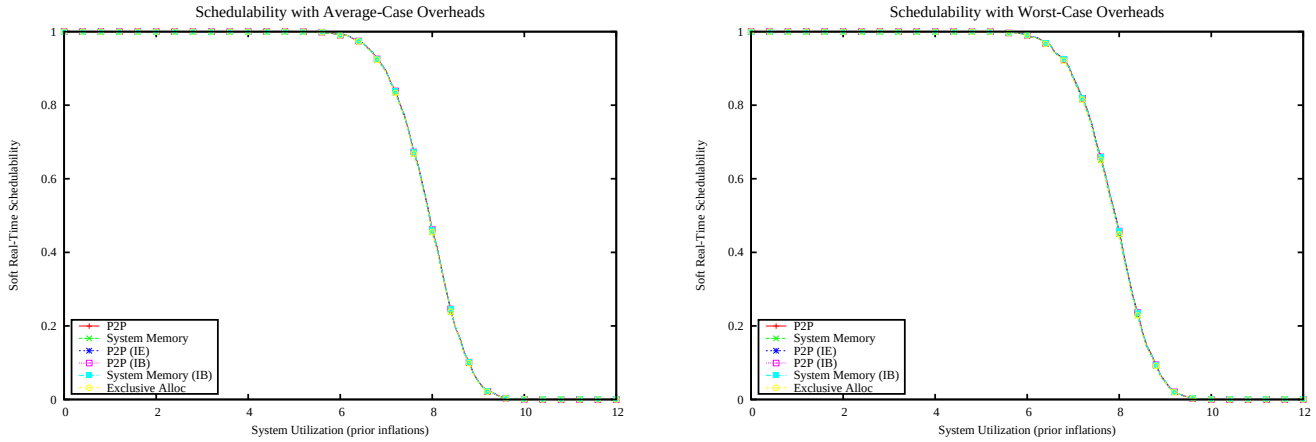

Figure 7212: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

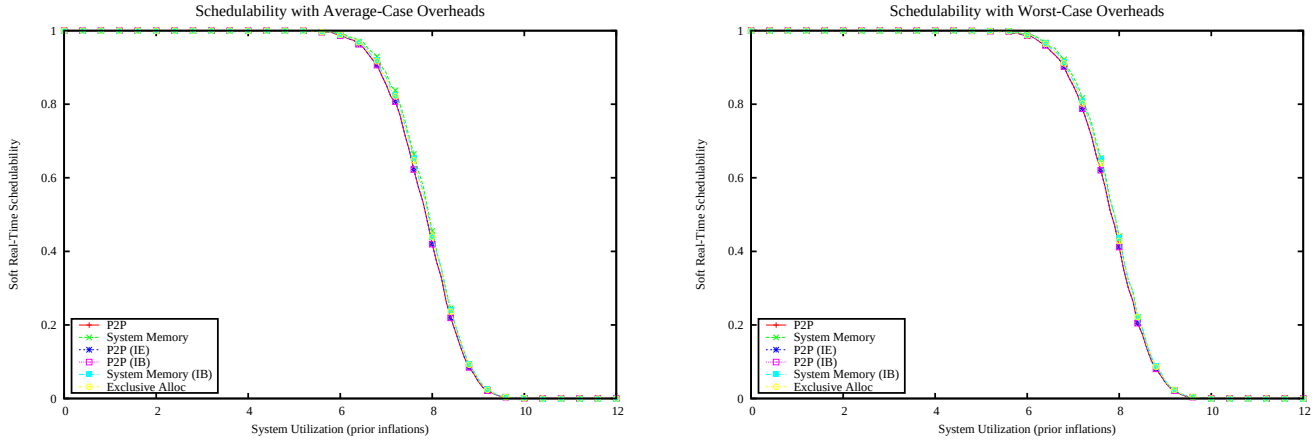

Figure 7213: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

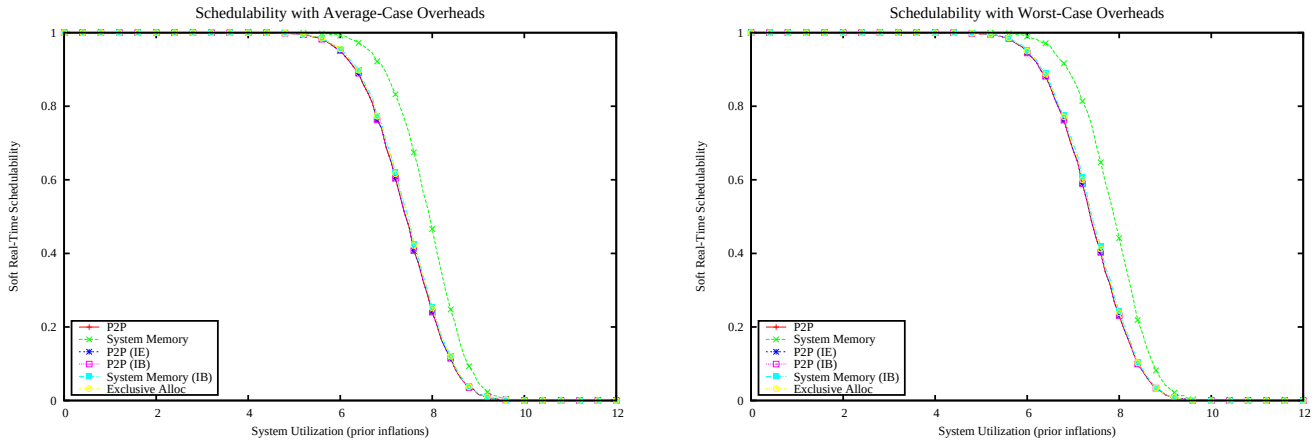

Figure 7214: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

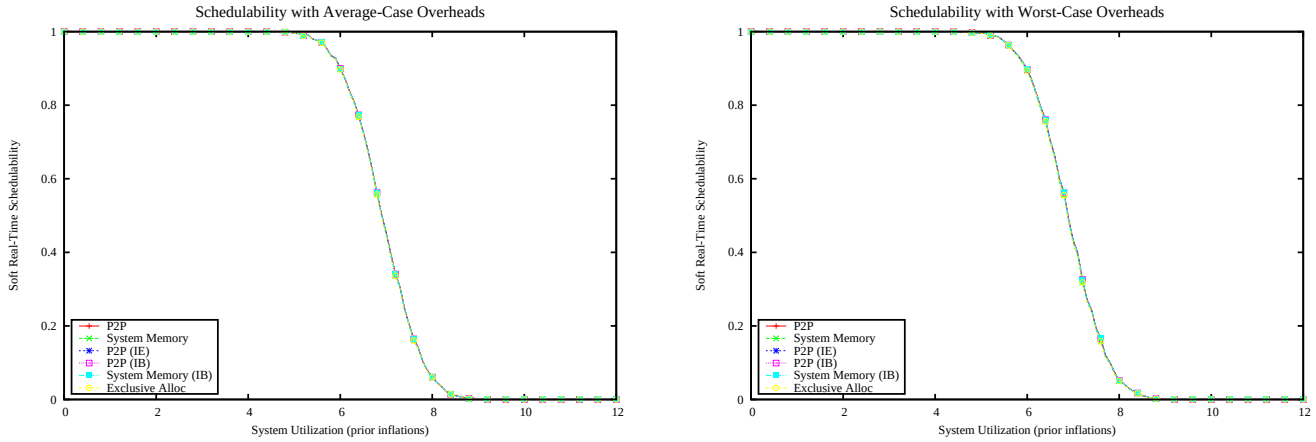

Figure 7215: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

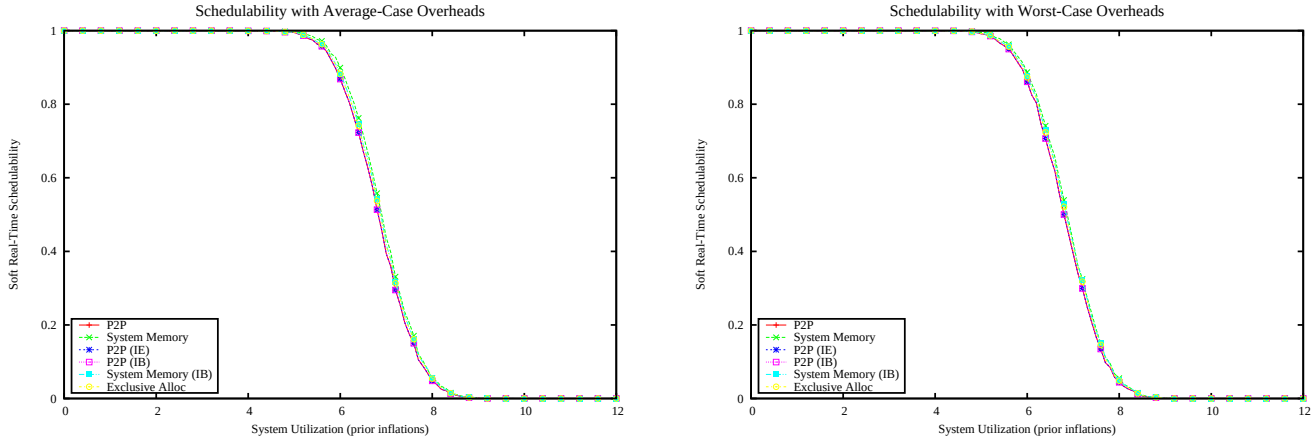

Figure 7216: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

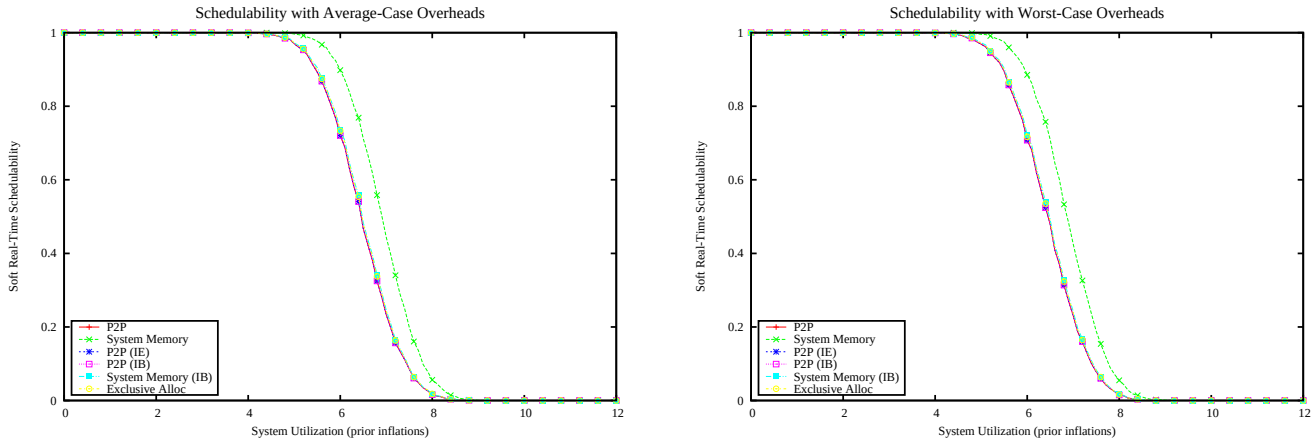

Figure 7217: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

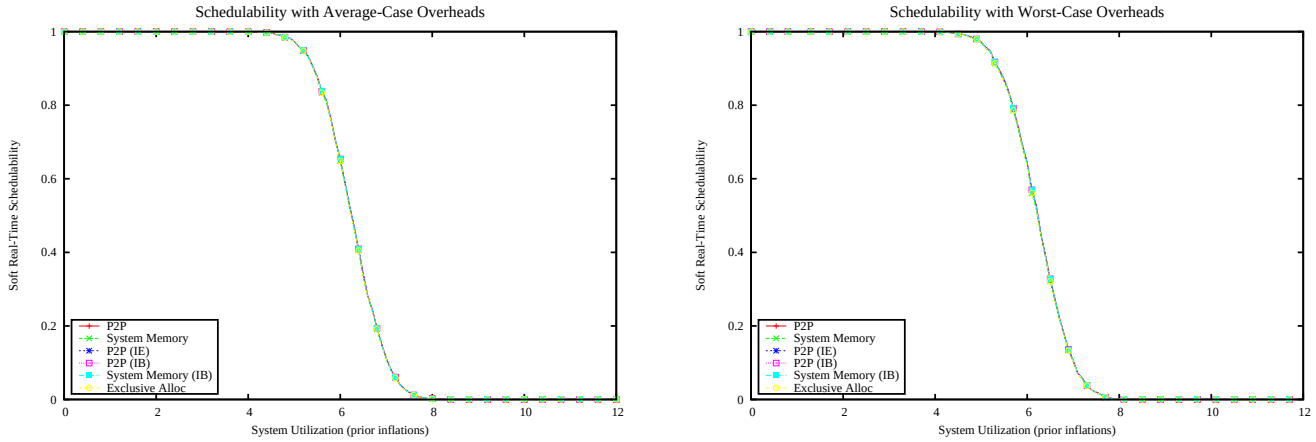

Figure 7218: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

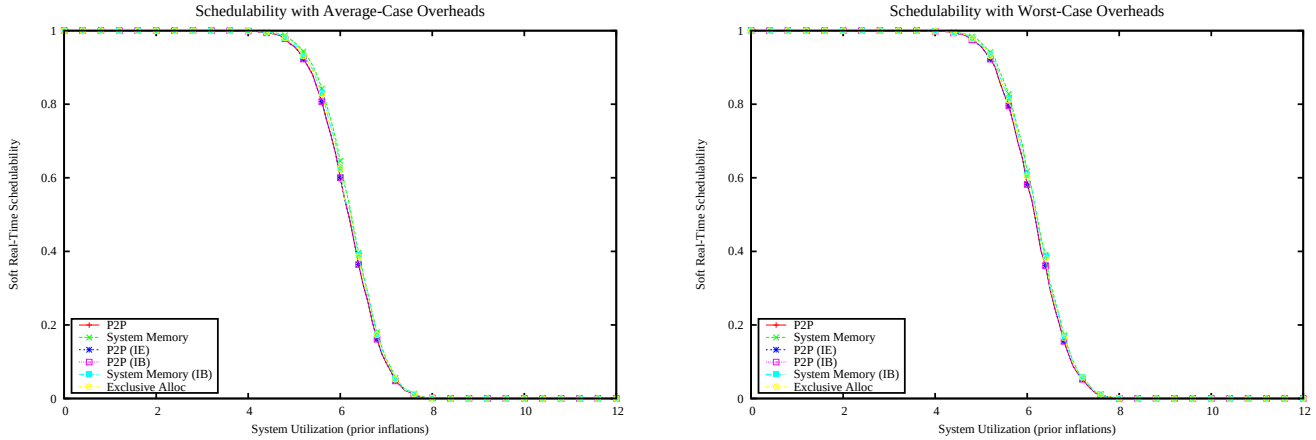

Figure 7219: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

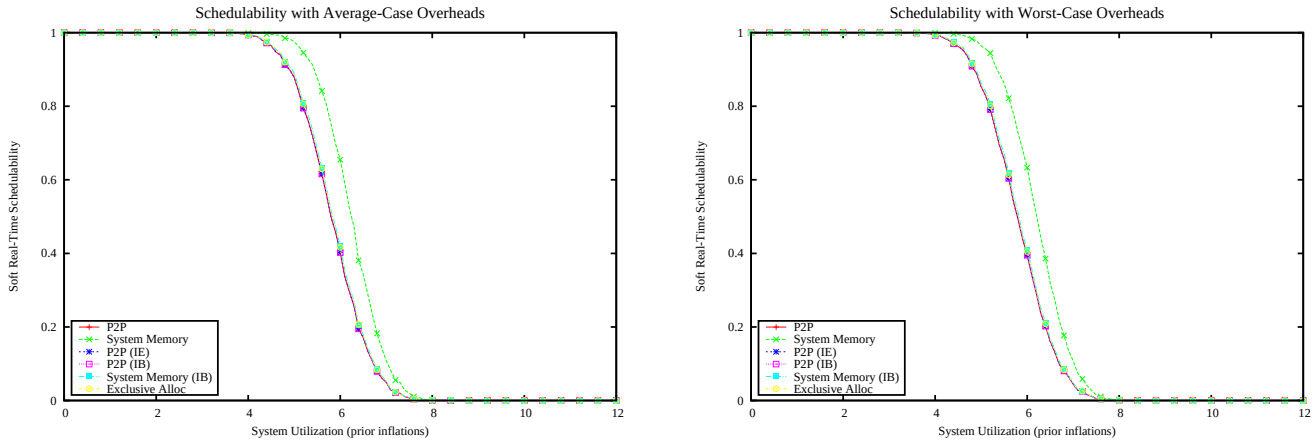

Figure 7220: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

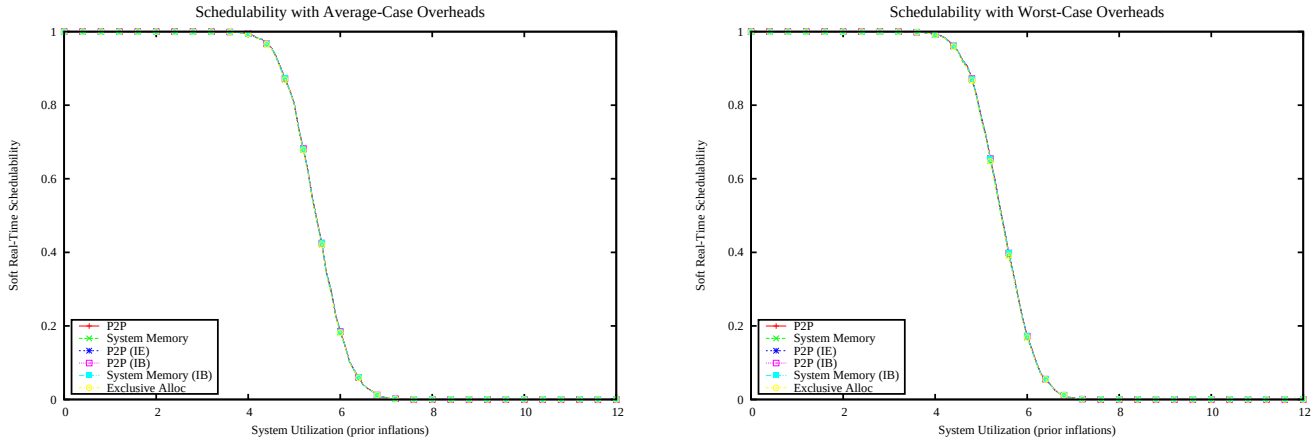

Figure 7221: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

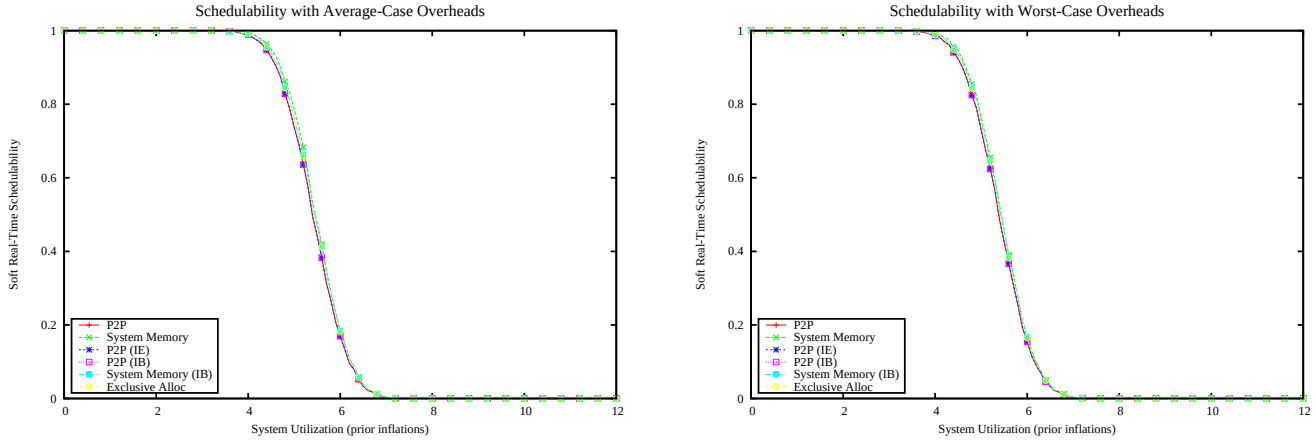

Figure 7222: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

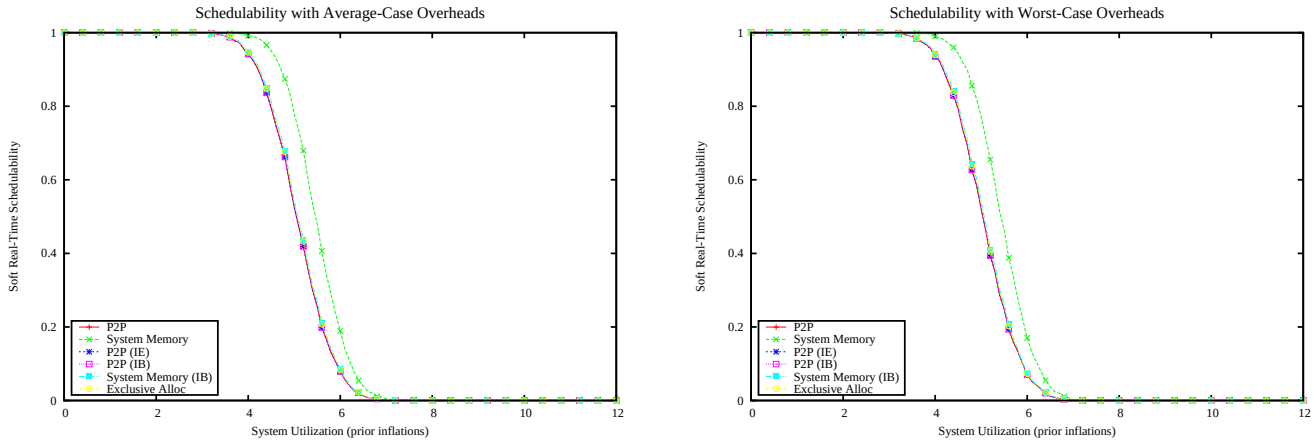

Figure 7223: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

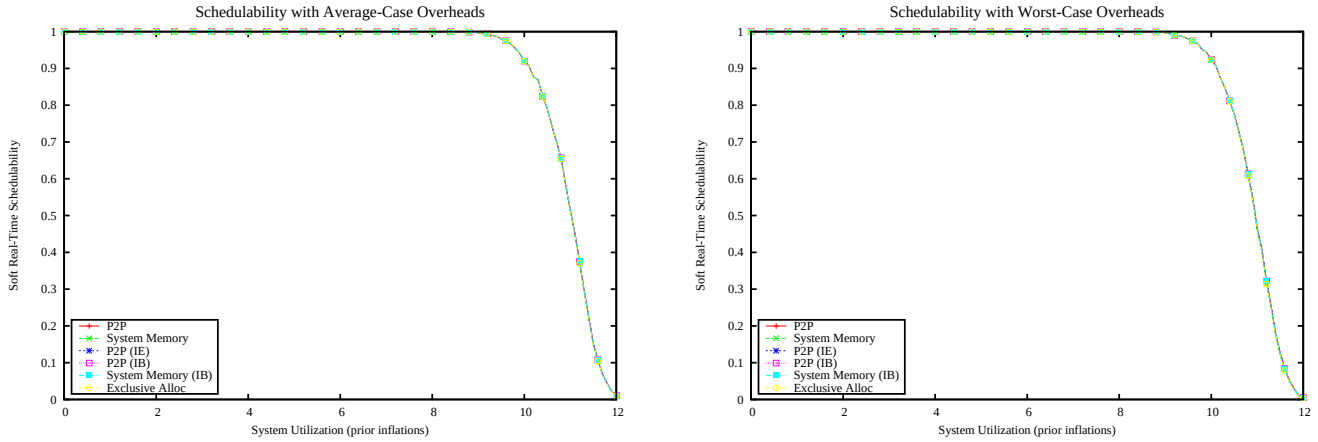

Figure 7224: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

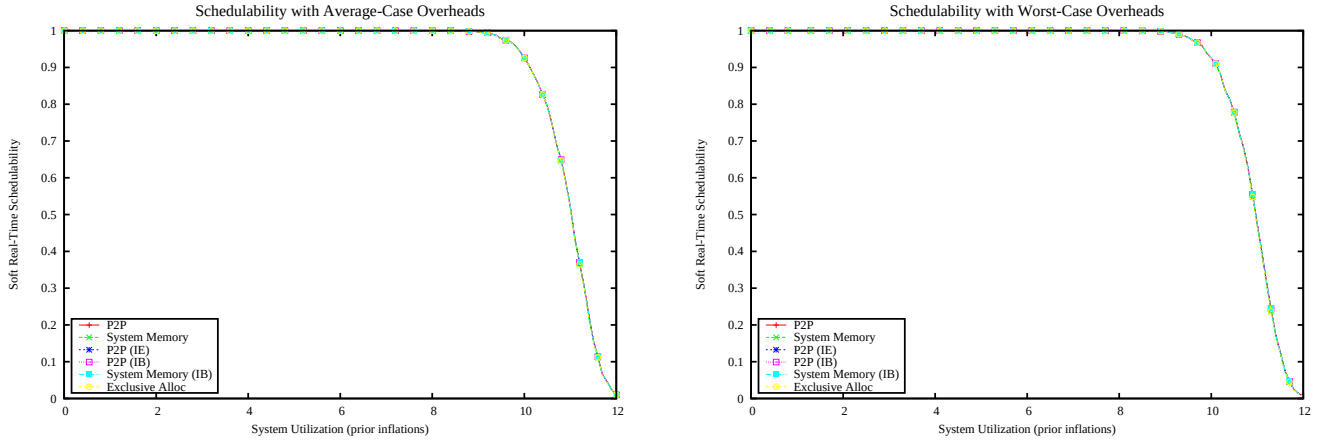

Figure 7225: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

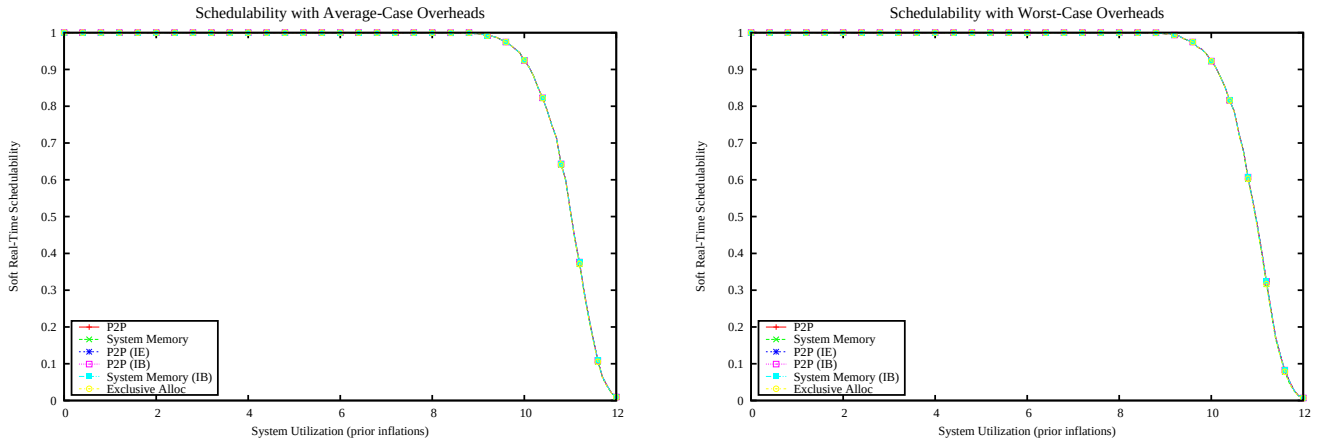

Figure 7226: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

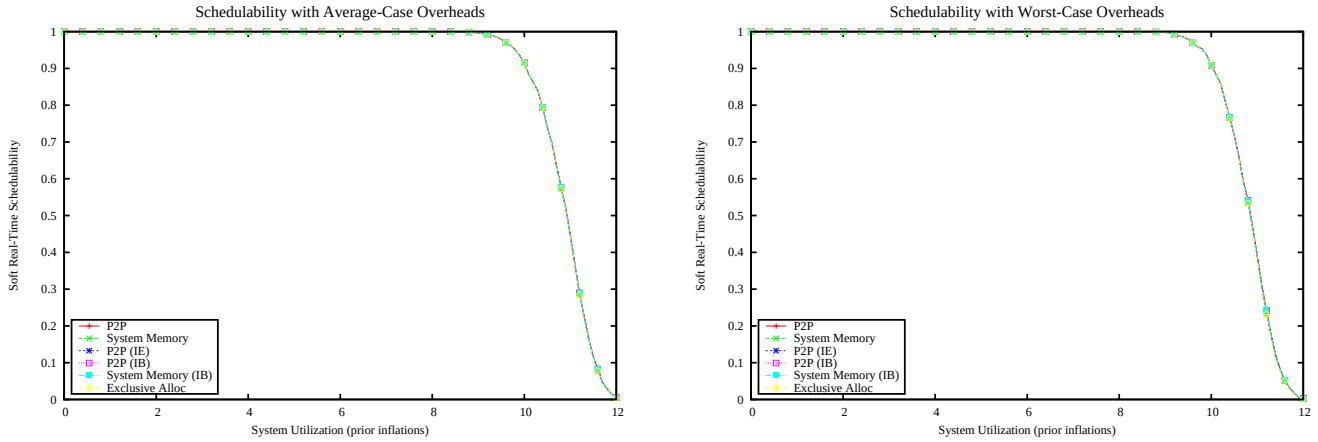

Figure 7227: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

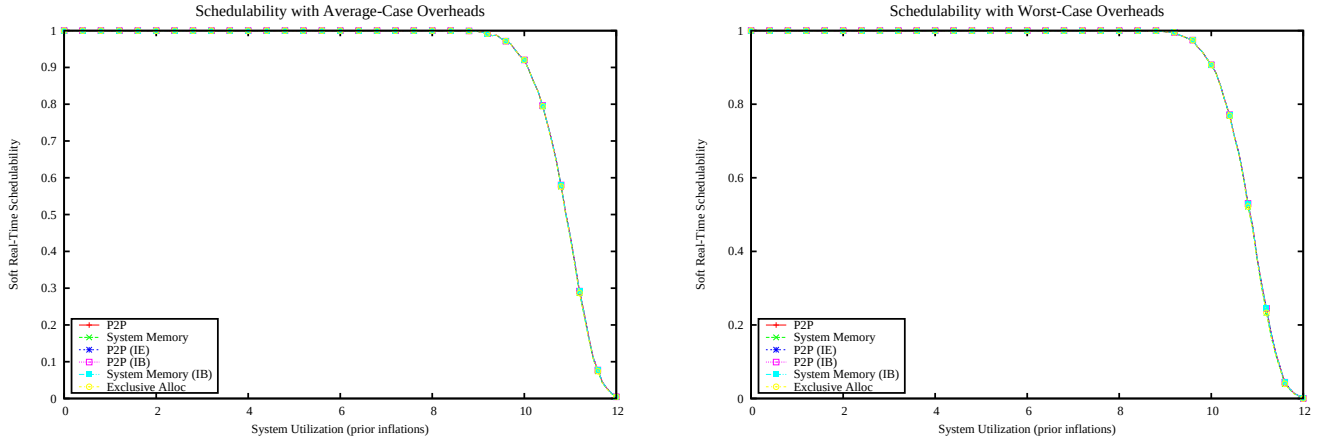

Figure 7228: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

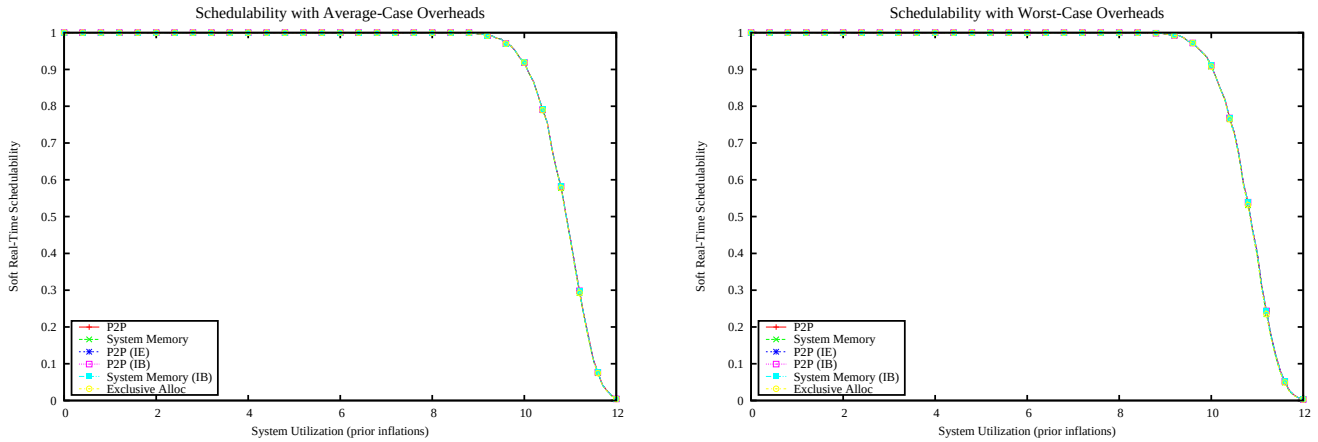

Figure 7229: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

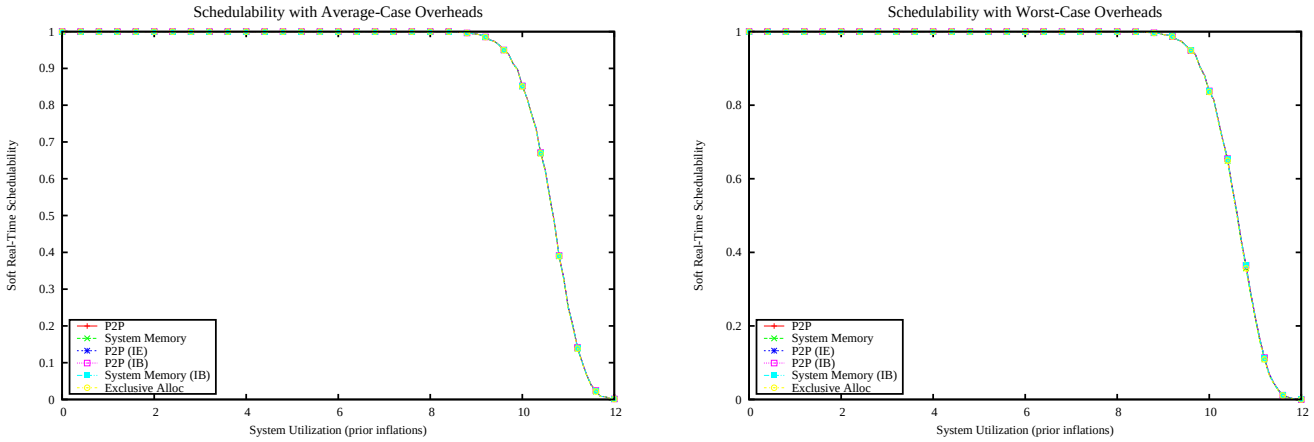

Figure 7230: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

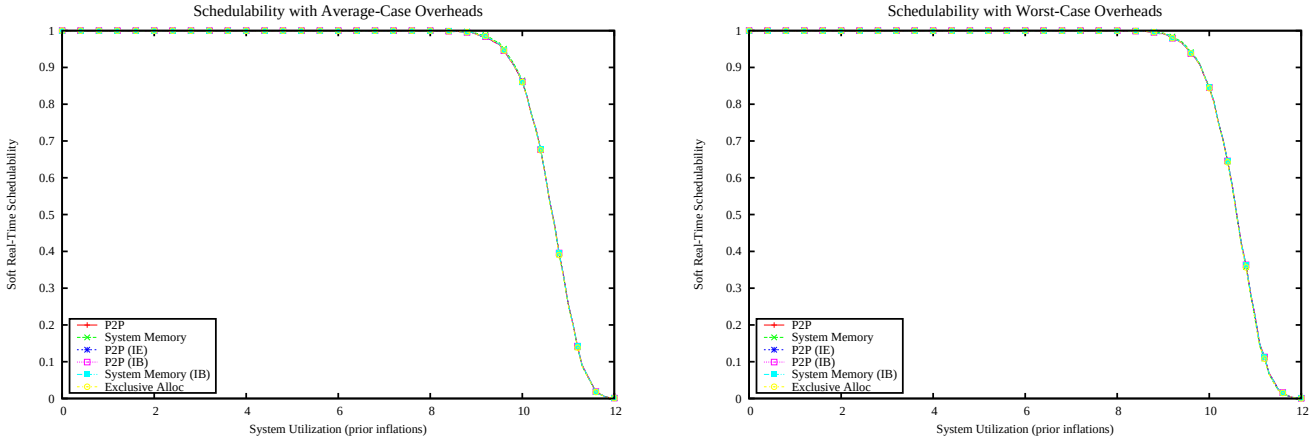

Figure 7231: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

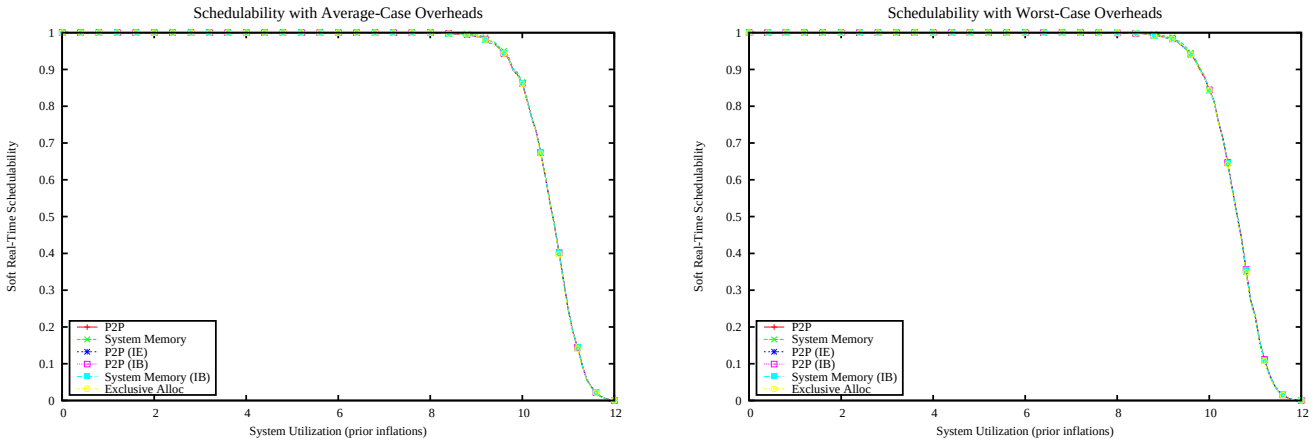

Figure 7232: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

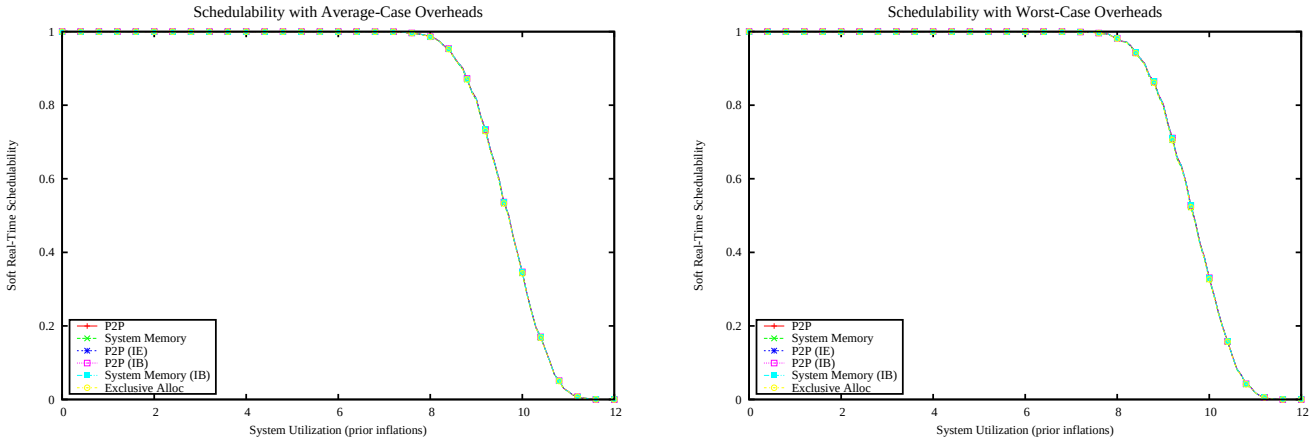

Figure 7233: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

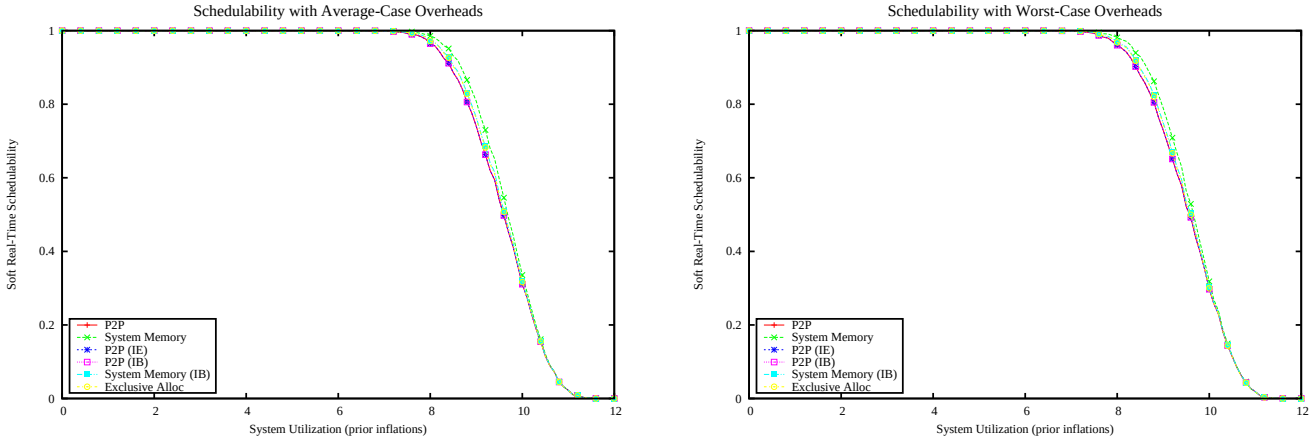

Figure 7234: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

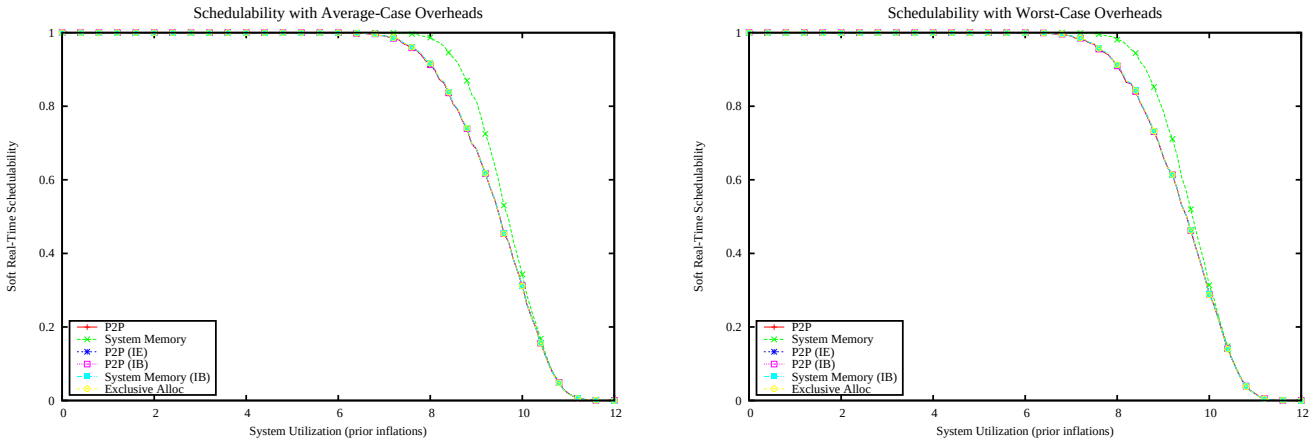

Figure 7235: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

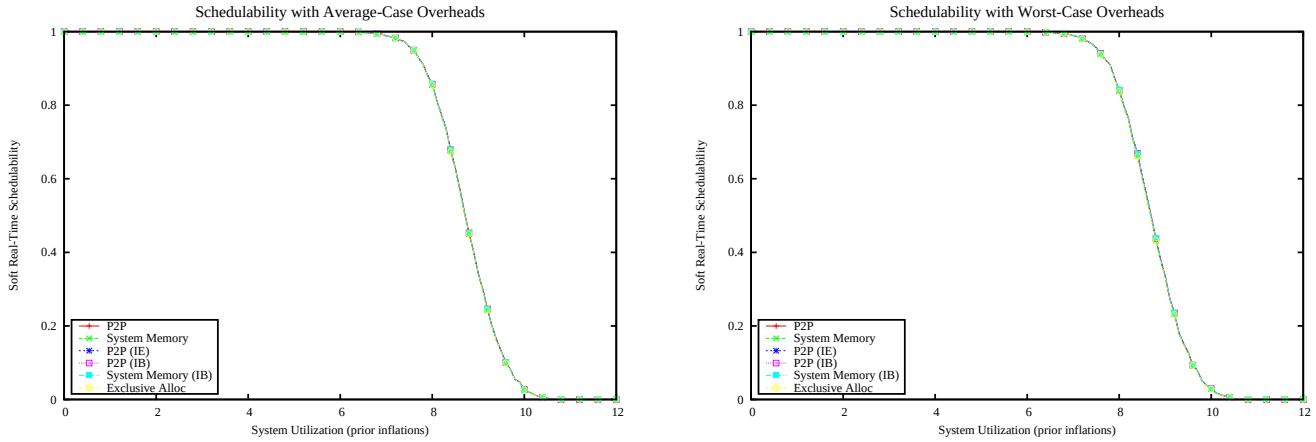

Figure 7236: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

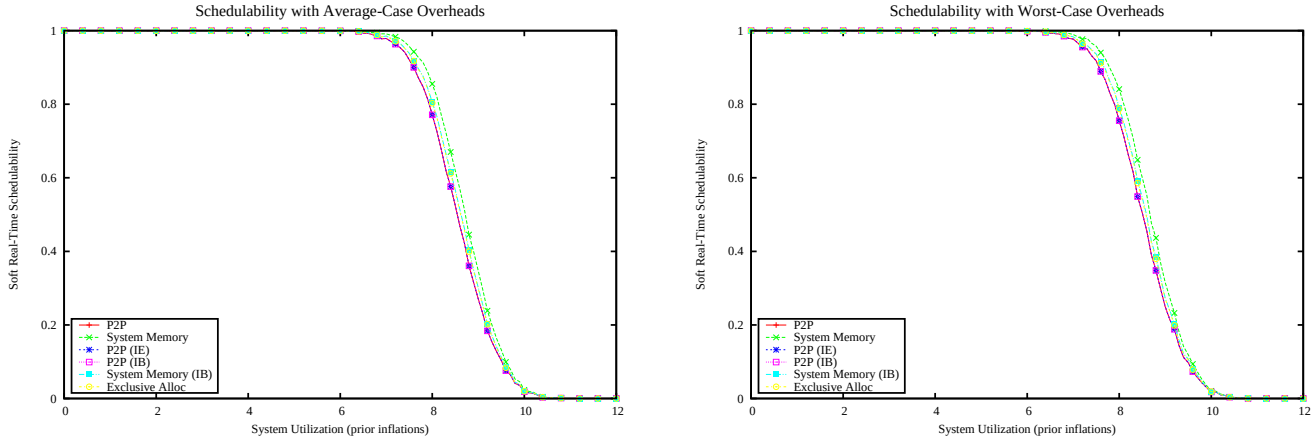

Figure 7237: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

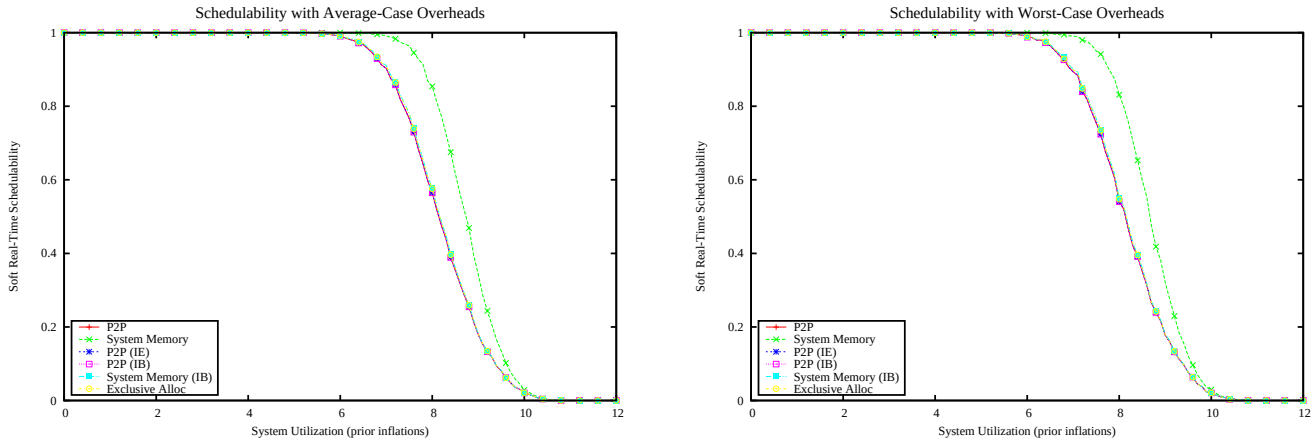

Figure 7238: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

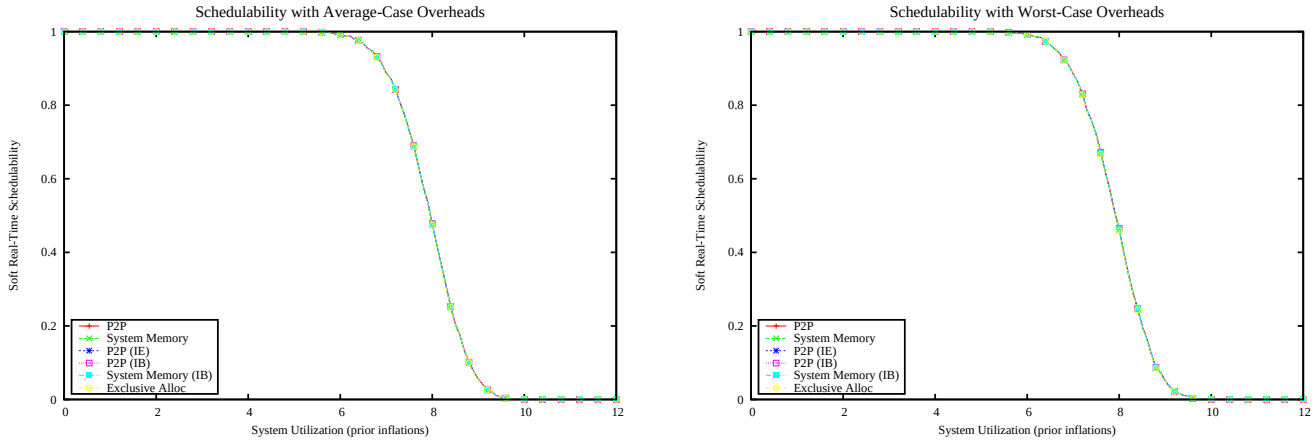

Figure 7239: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

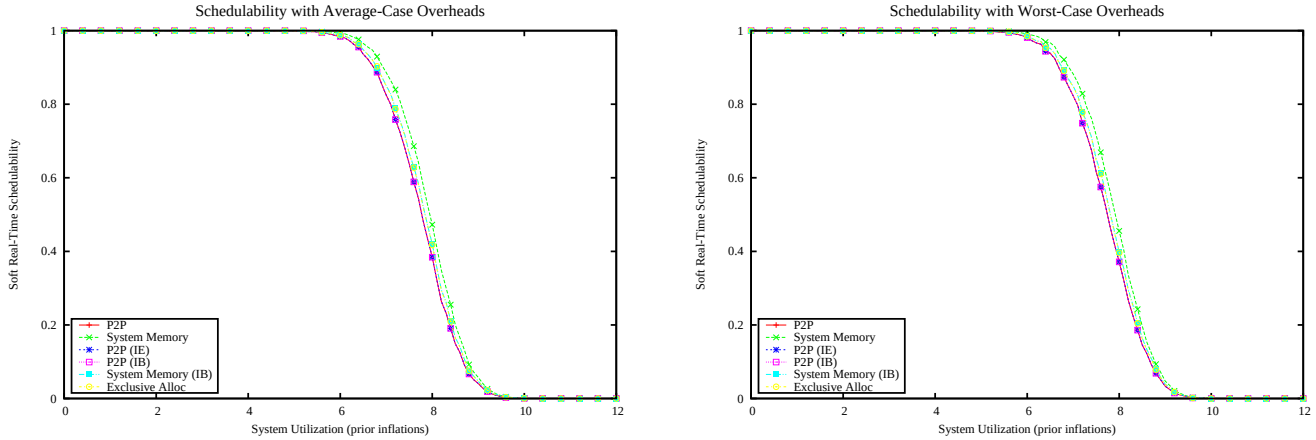

Figure 7240: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

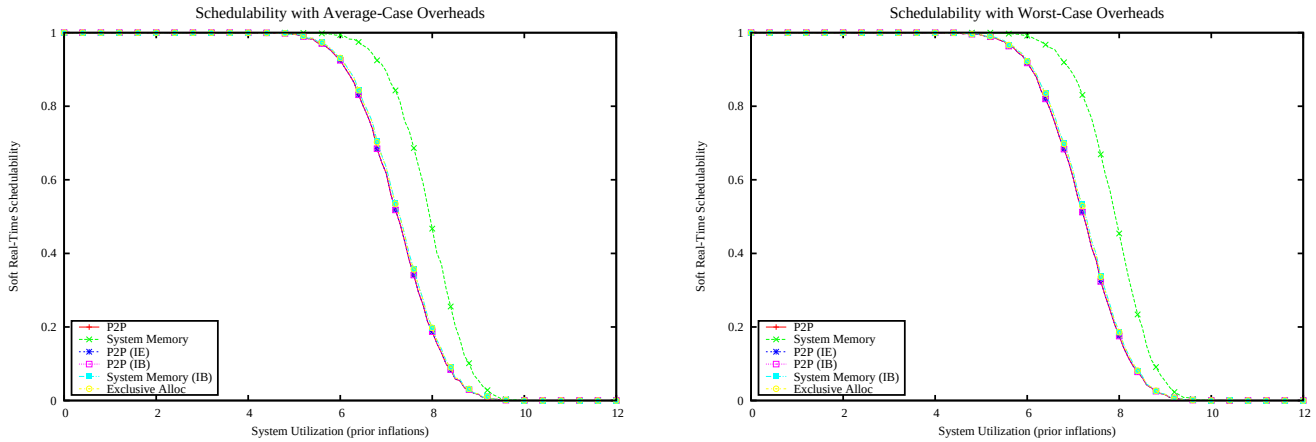

Figure 7241: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

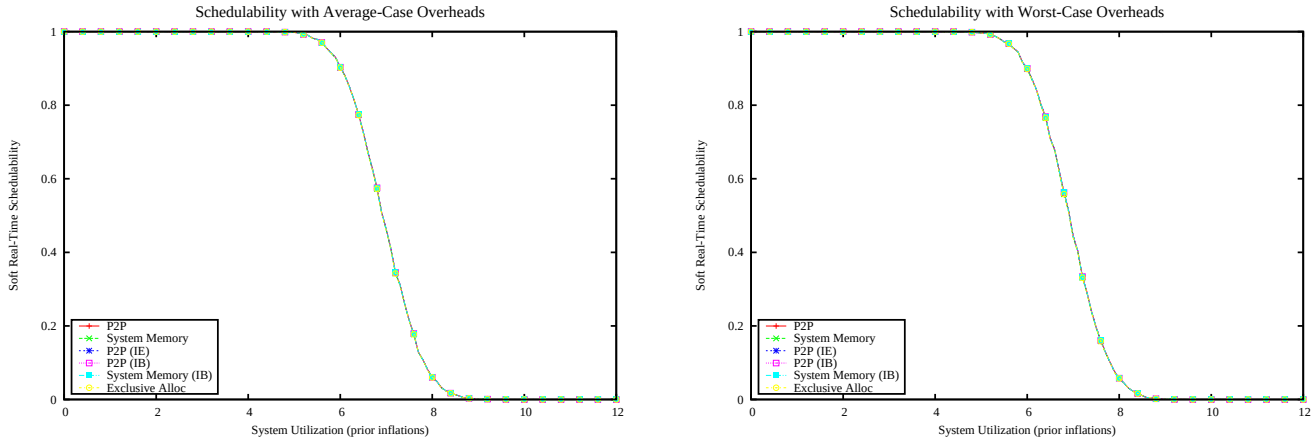

Figure 7242: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

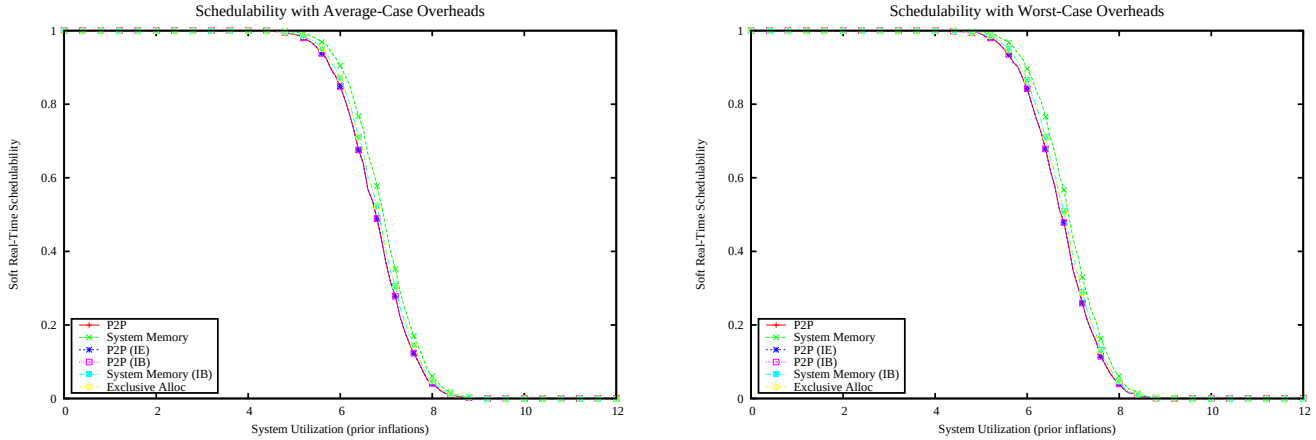

Figure 7243: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

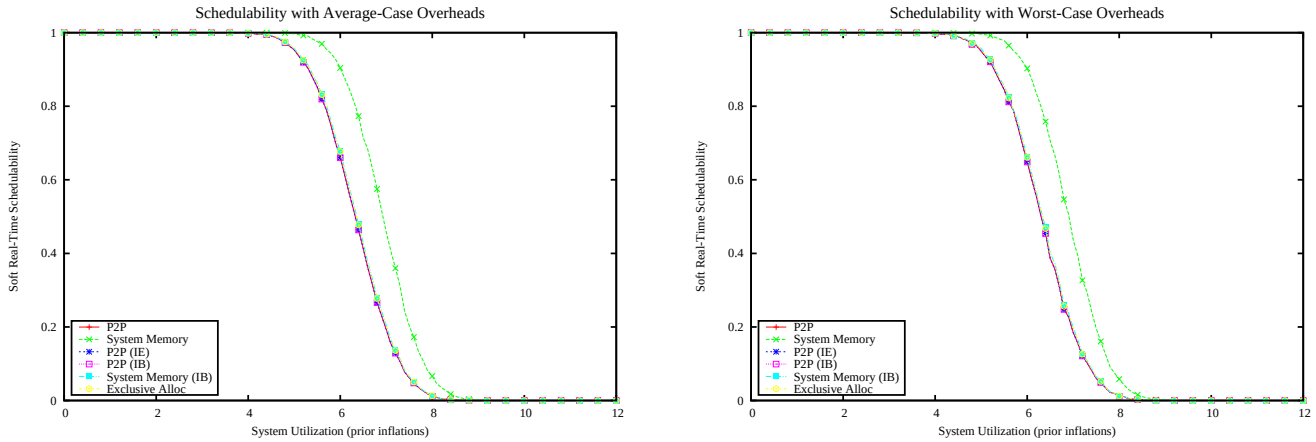

Figure 7244: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

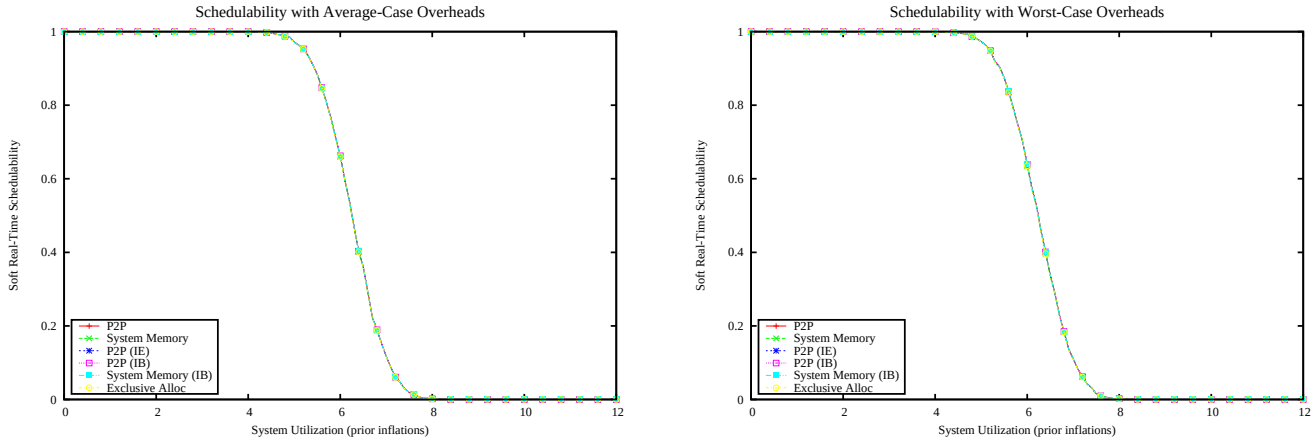

Figure 7245: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

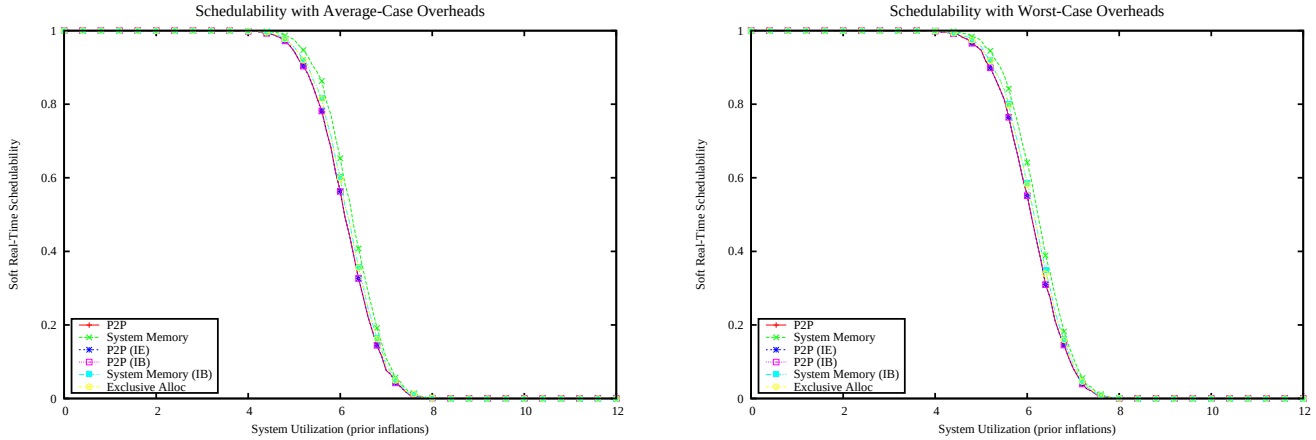

Figure 7246: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

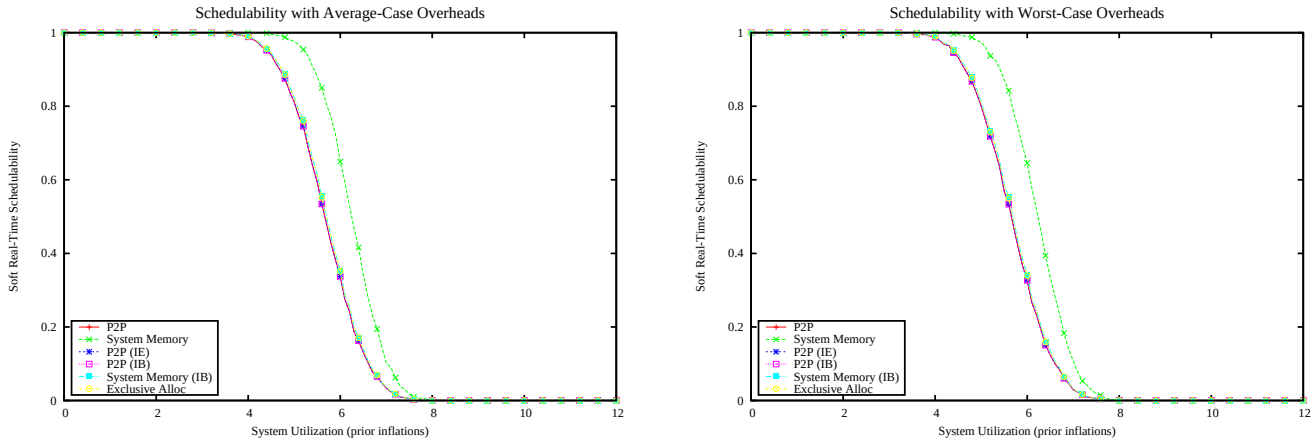

Figure 7247: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

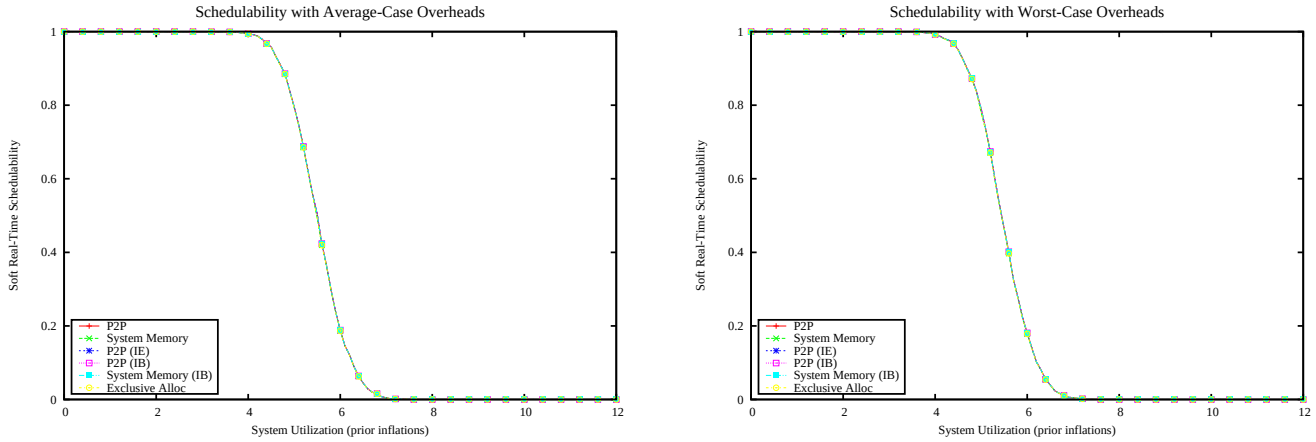

Figure 7248: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

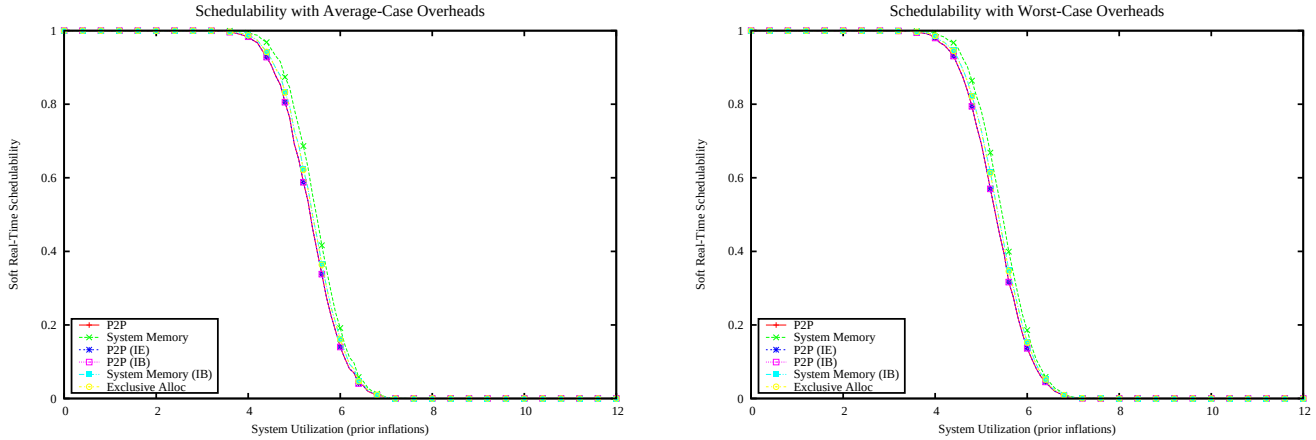

Figure 7249: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

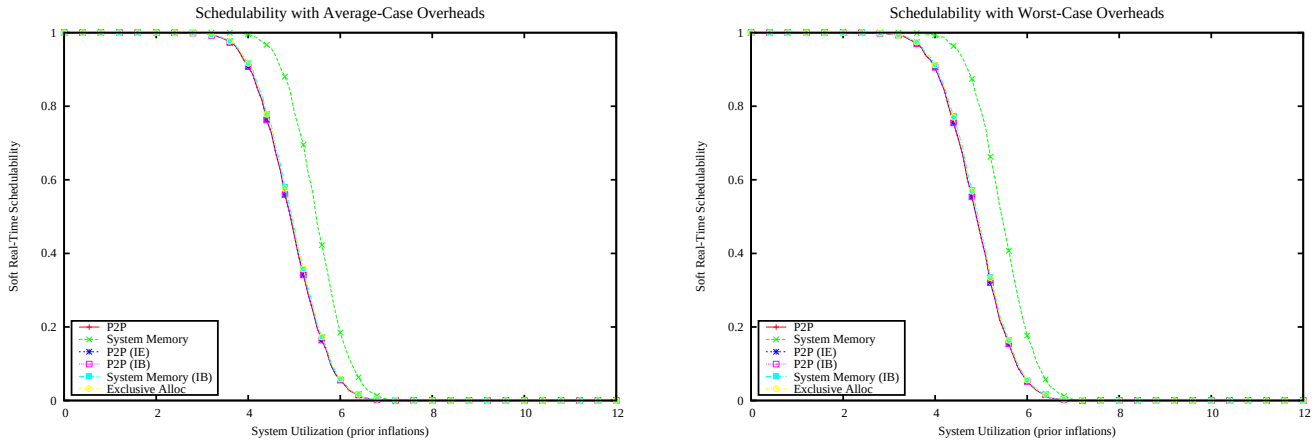

Figure 7250: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

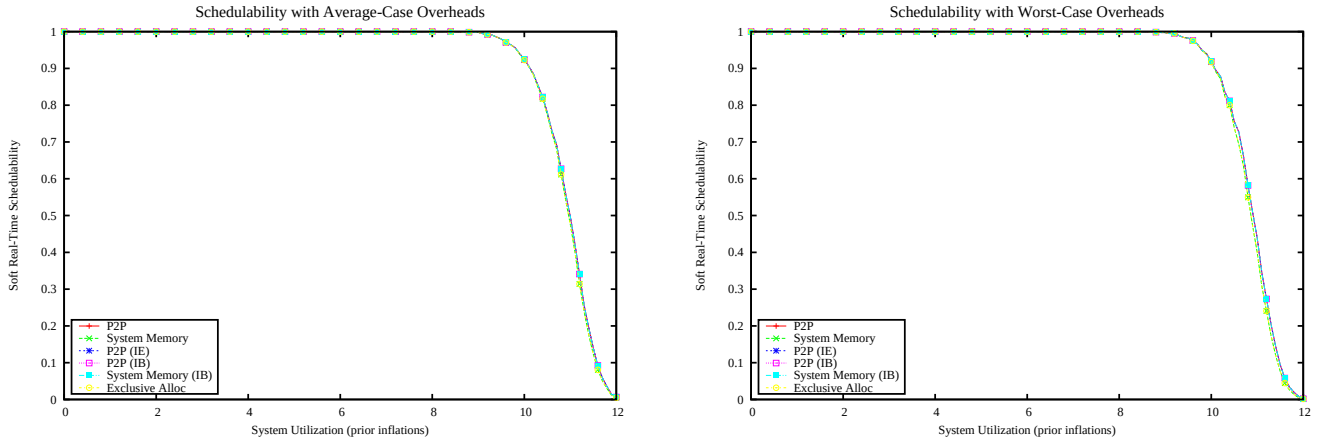

Figure 7251: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

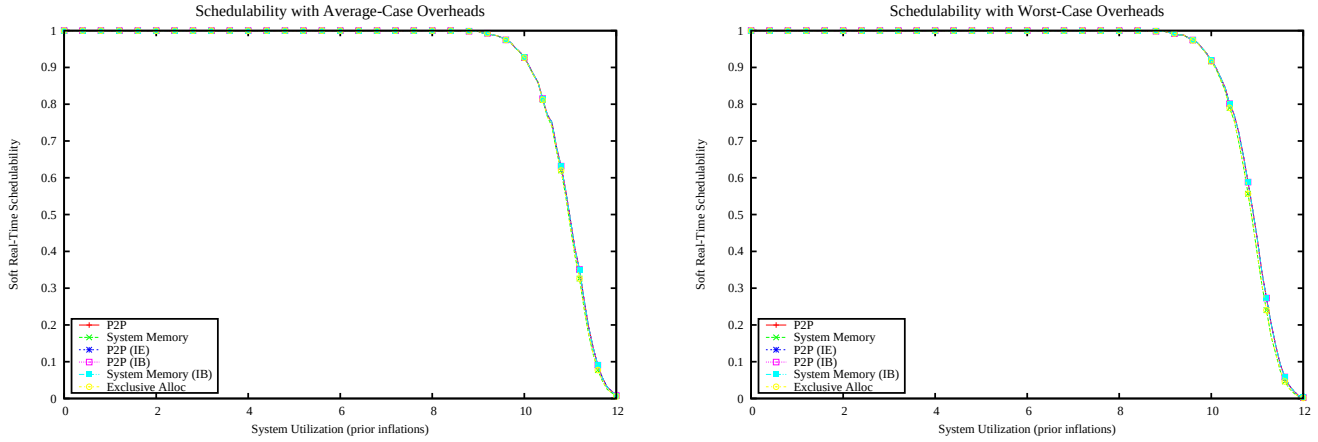

Figure 7252: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

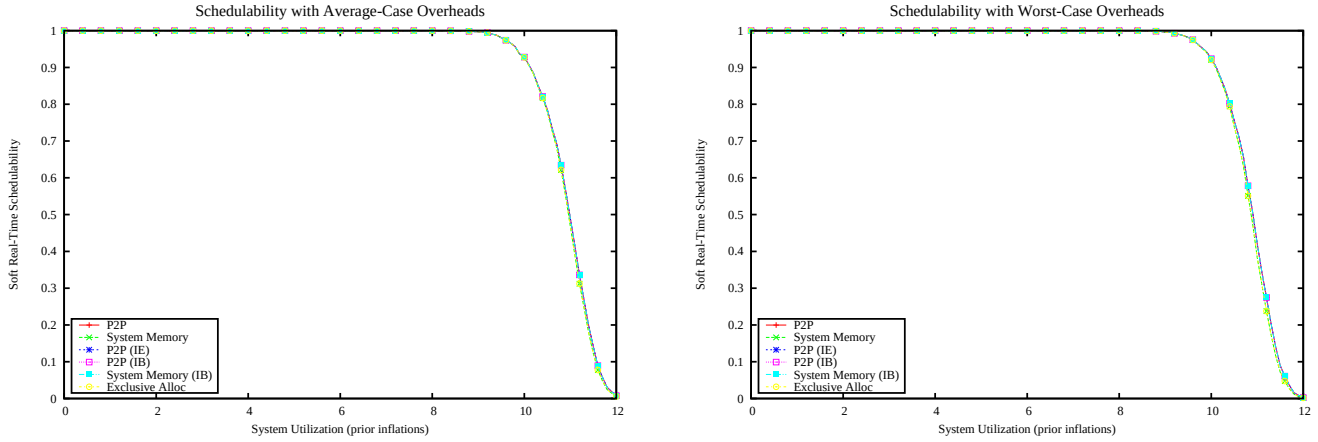

Figure 7253: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

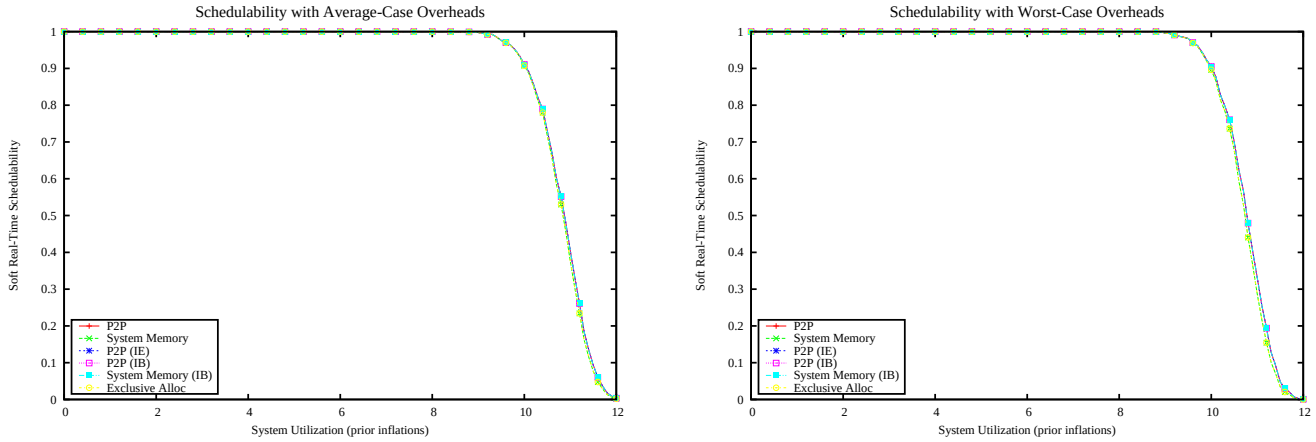

Figure 7254: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

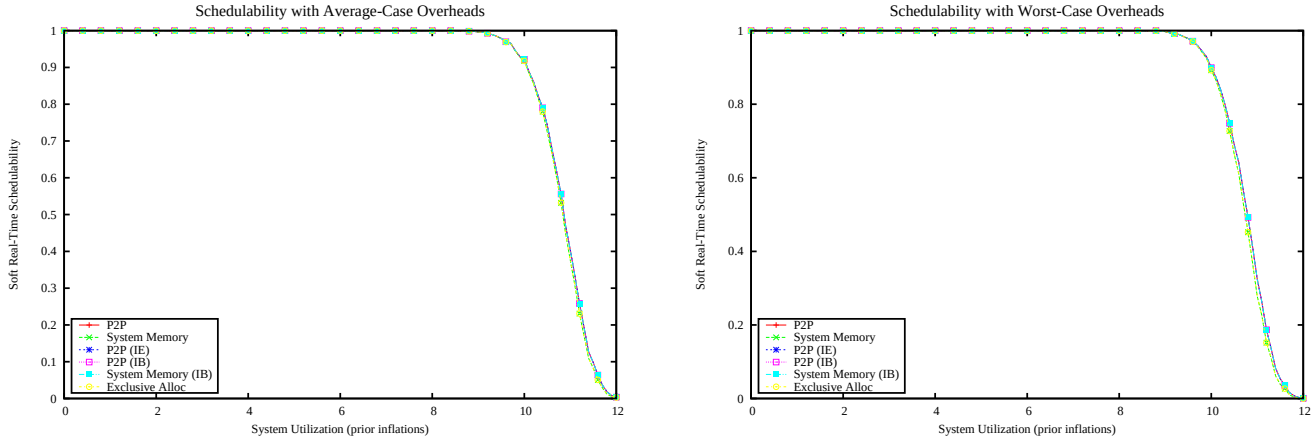

Figure 7255: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

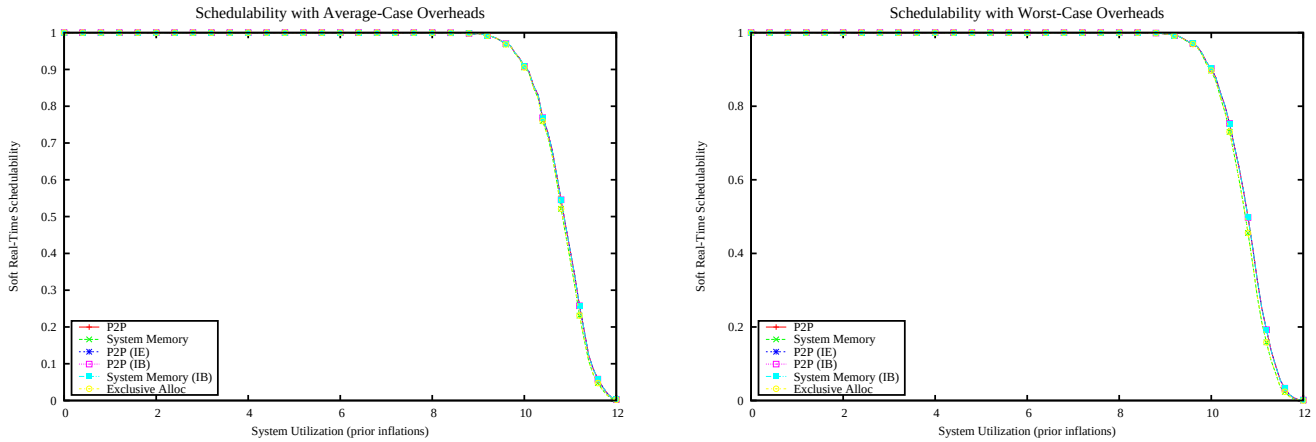

Figure 7256: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

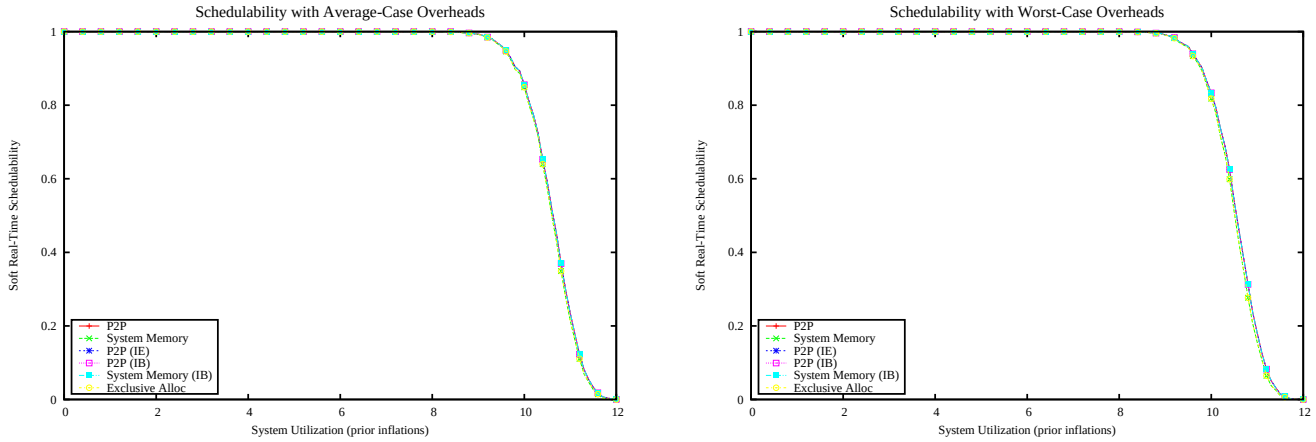

Figure 7257: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

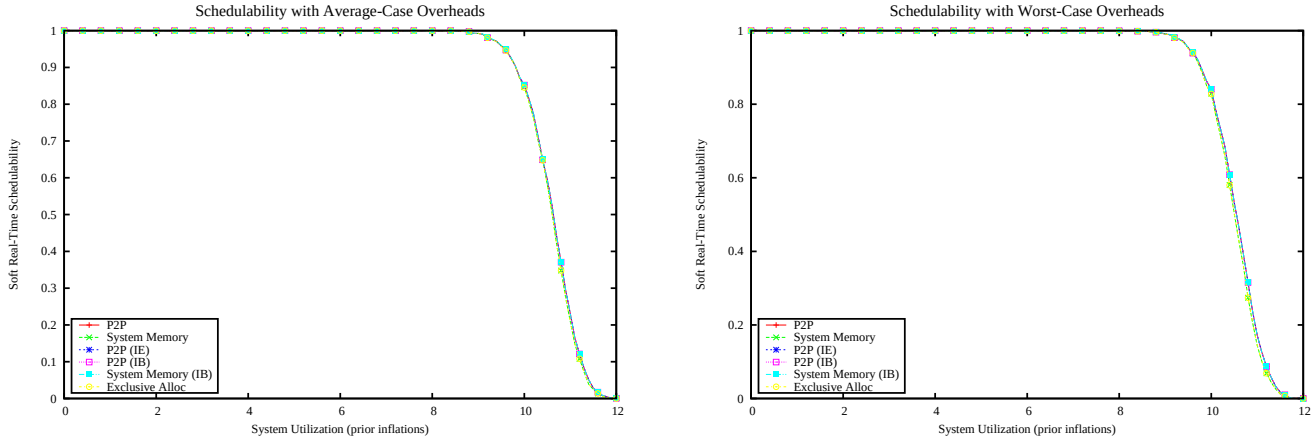

Figure 7258: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

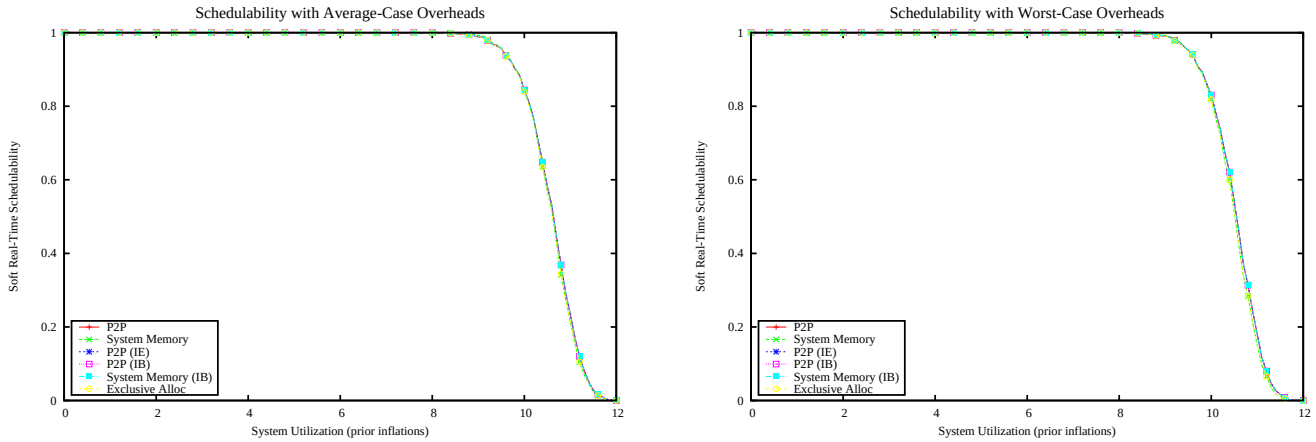

Figure 7259: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

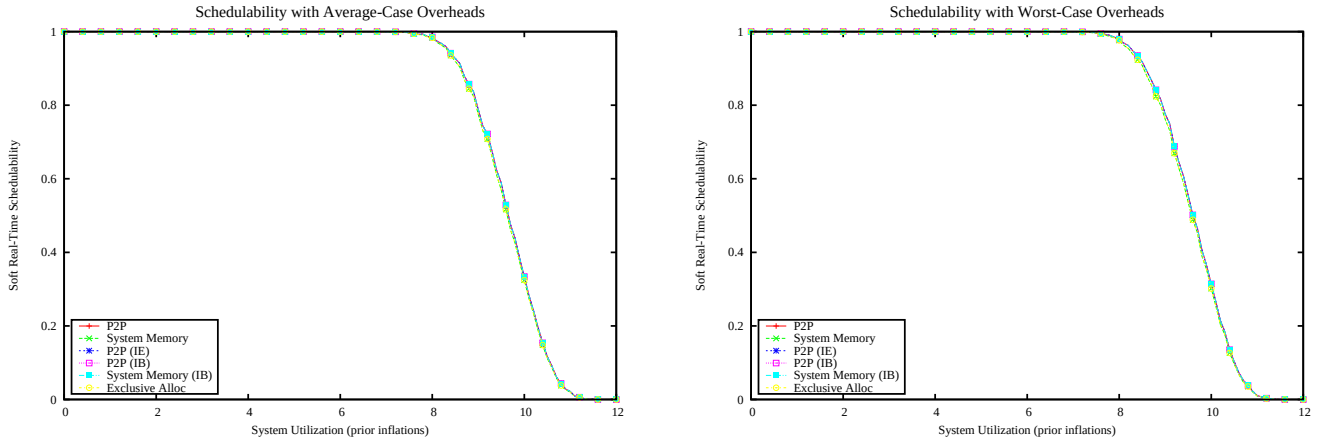

Figure 7260: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

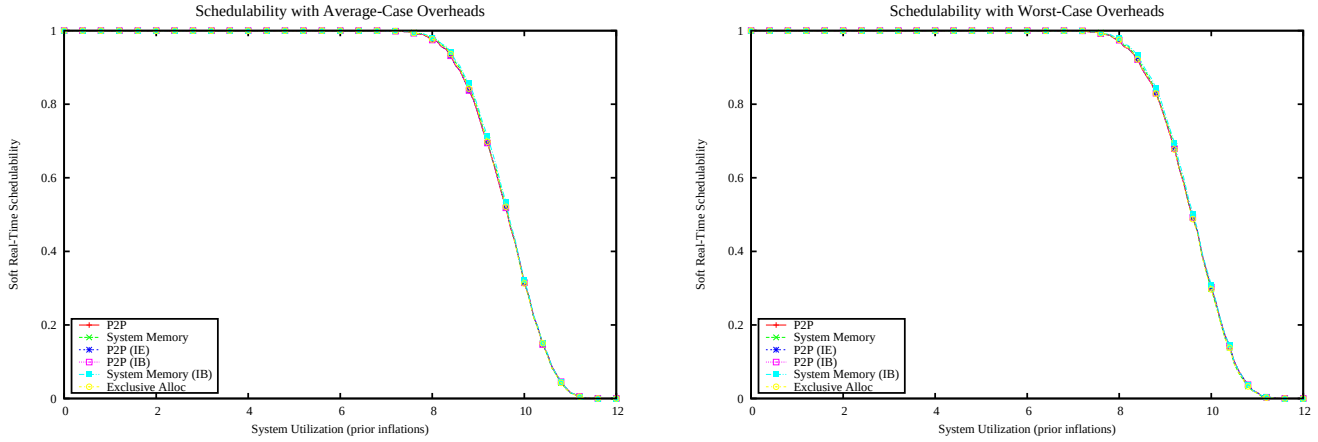

Figure 7261: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

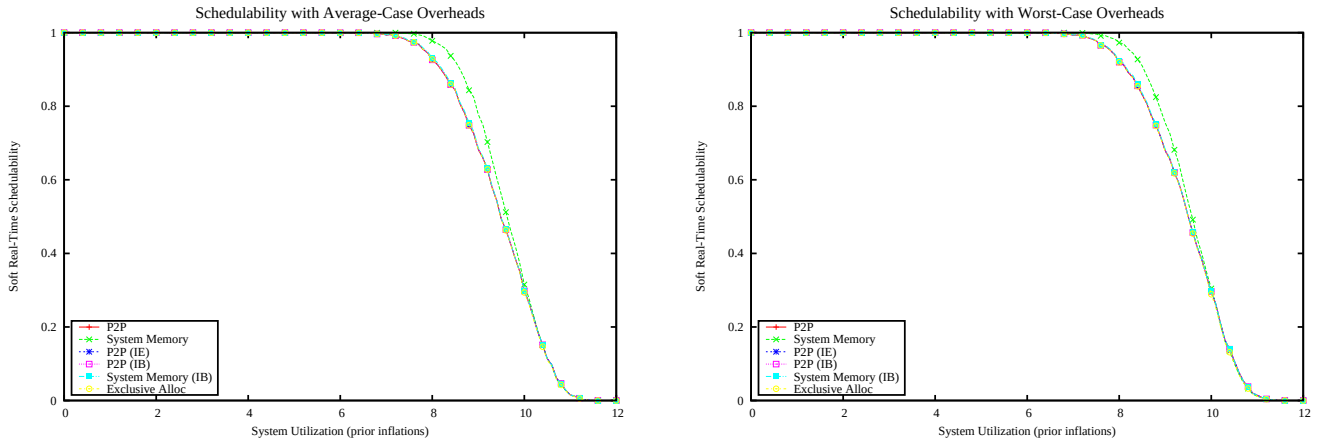

Figure 7262: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

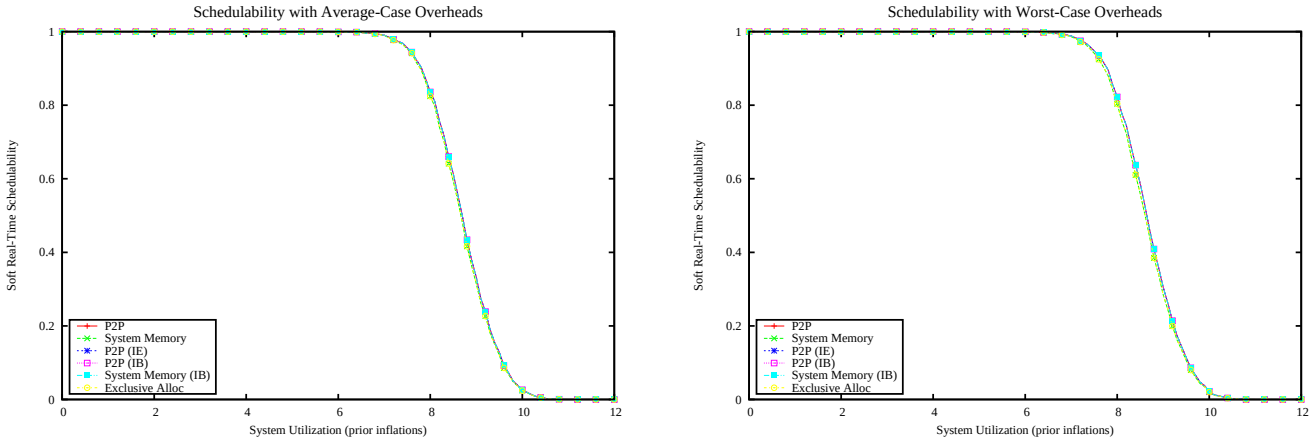

Figure 7263: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

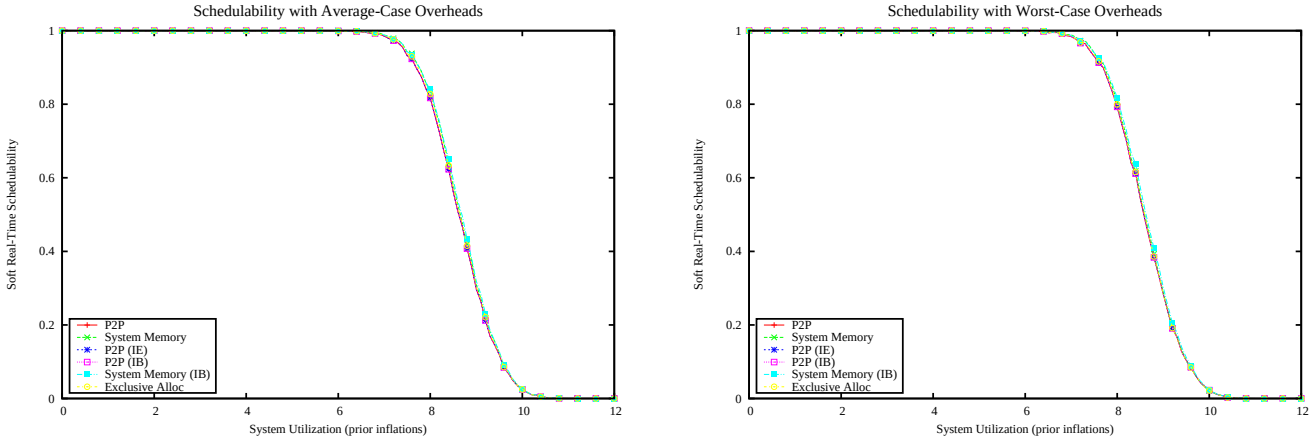

Figure 7264: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

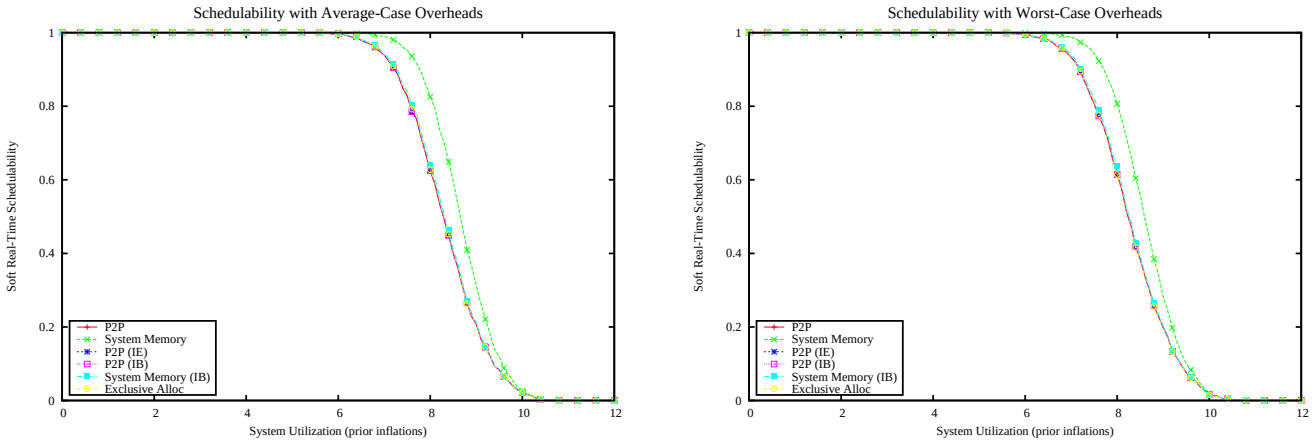

Figure 7265: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

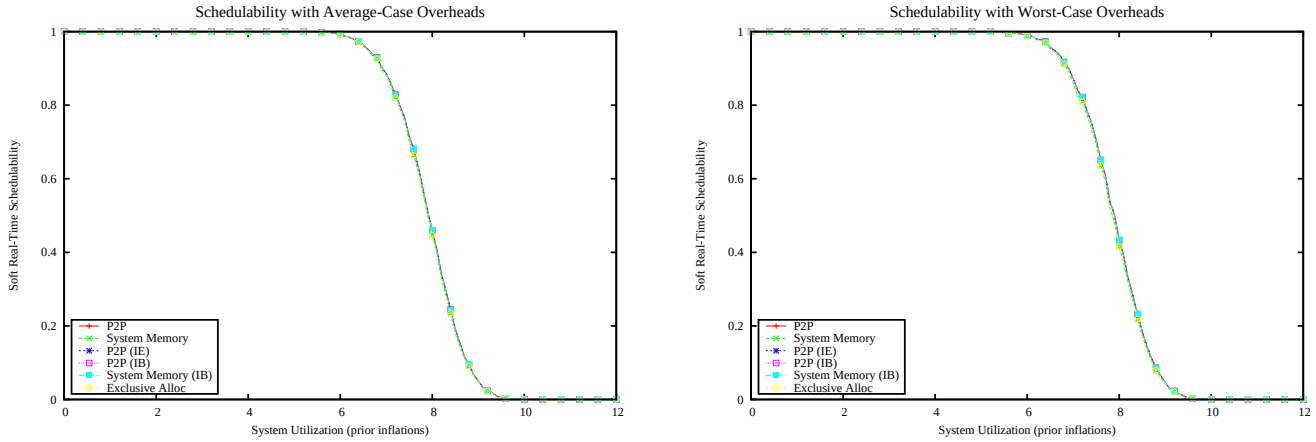

Figure 7266: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

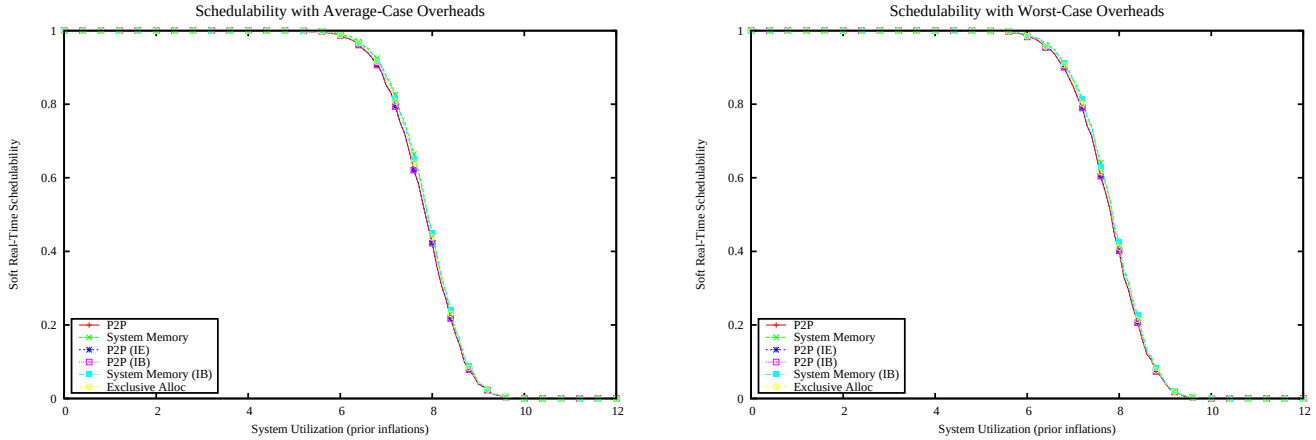

Figure 7267: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

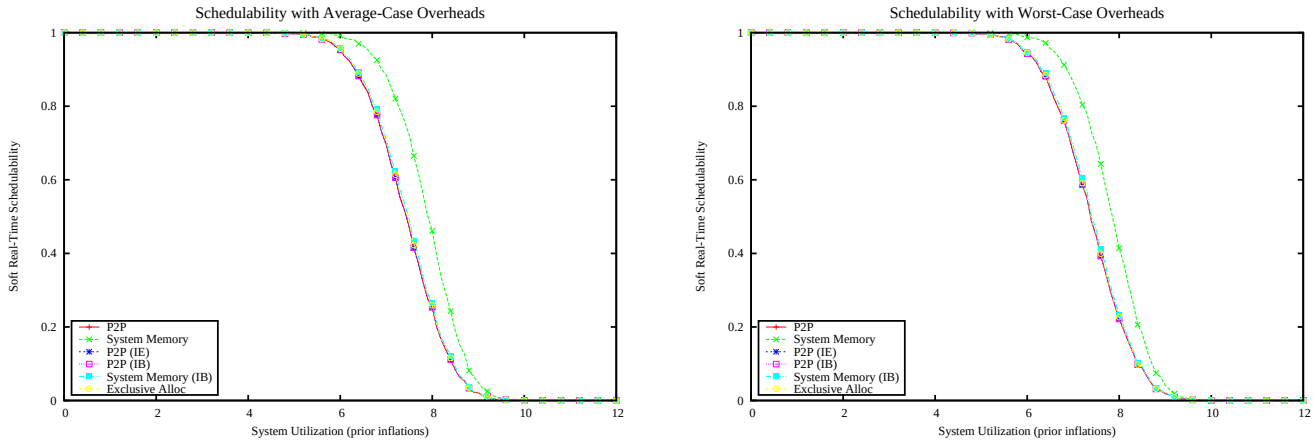

Figure 7268: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

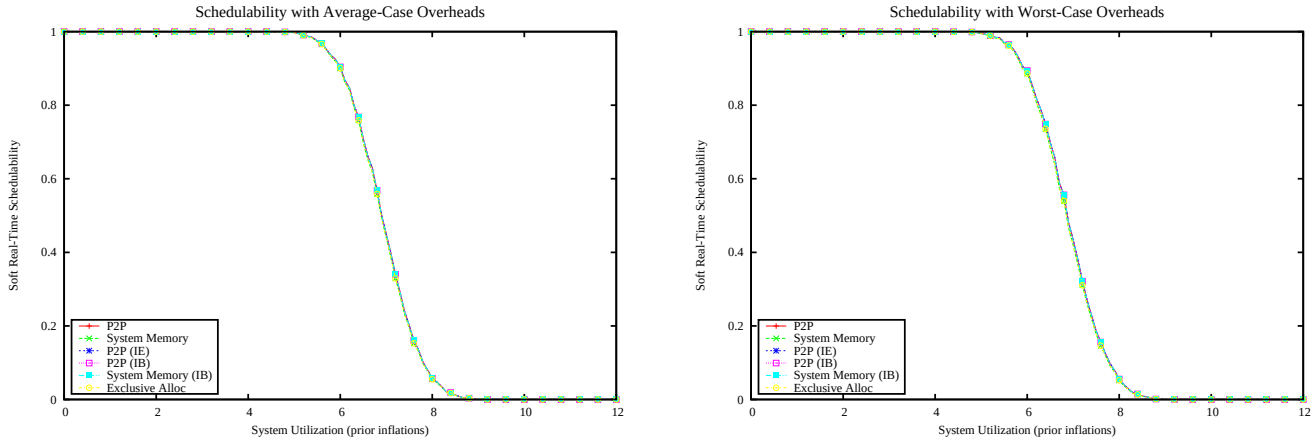

Figure 7269: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

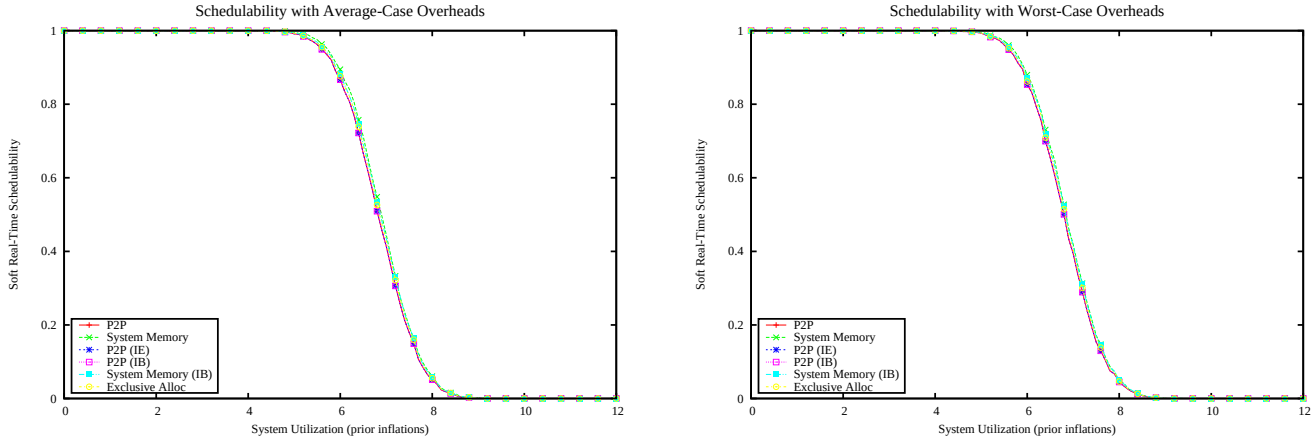

Figure 7270: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

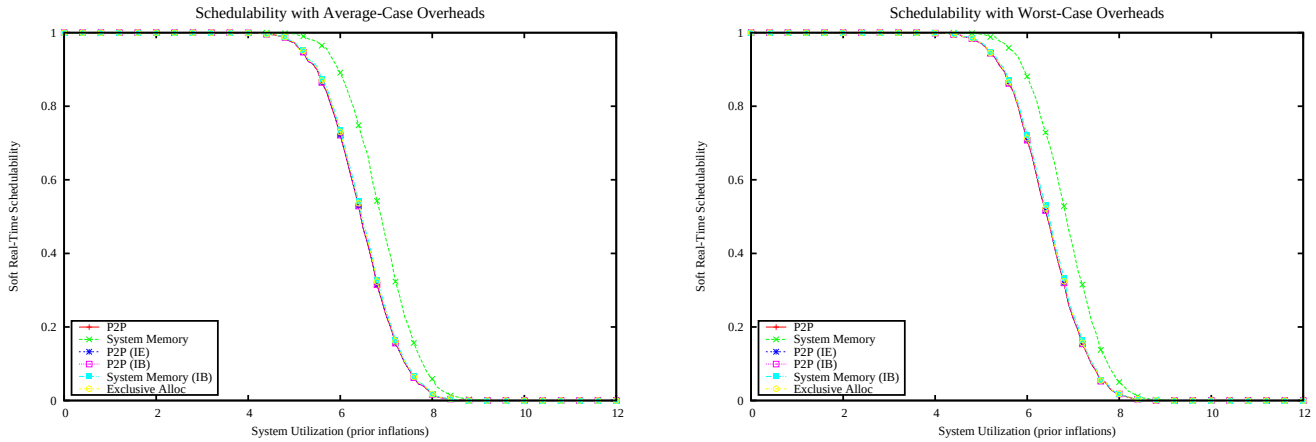

Figure 7271: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

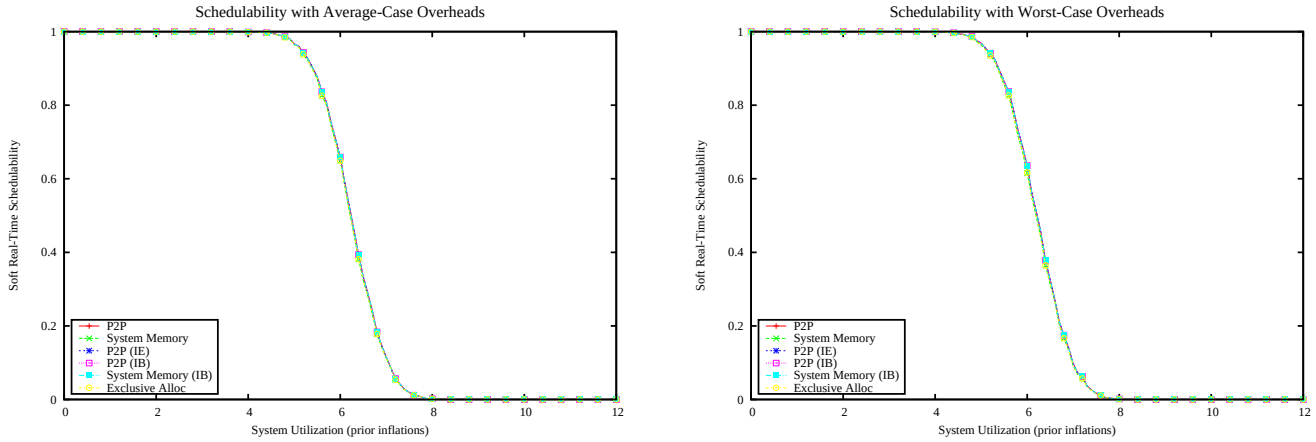

Figure 7272: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

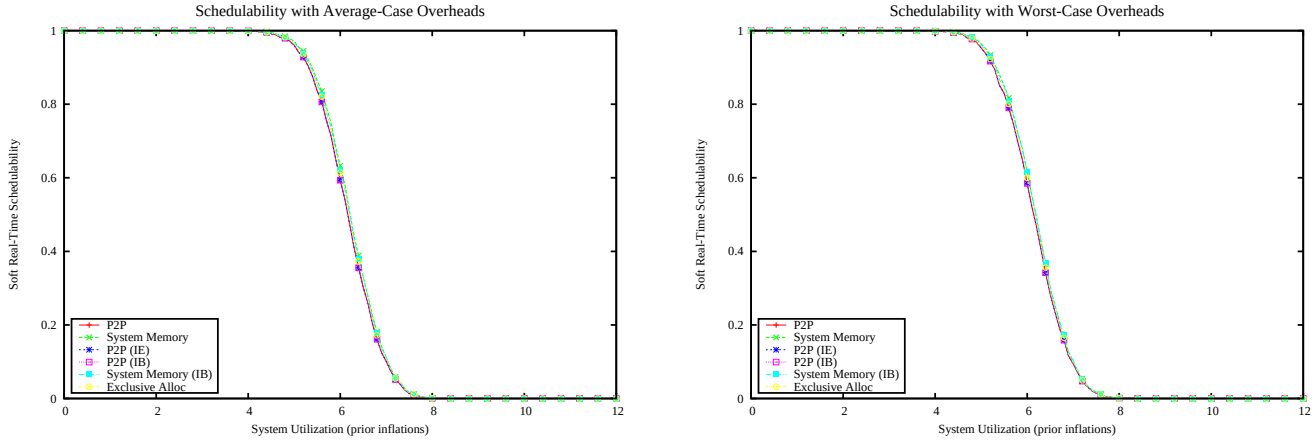

Figure 7273: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

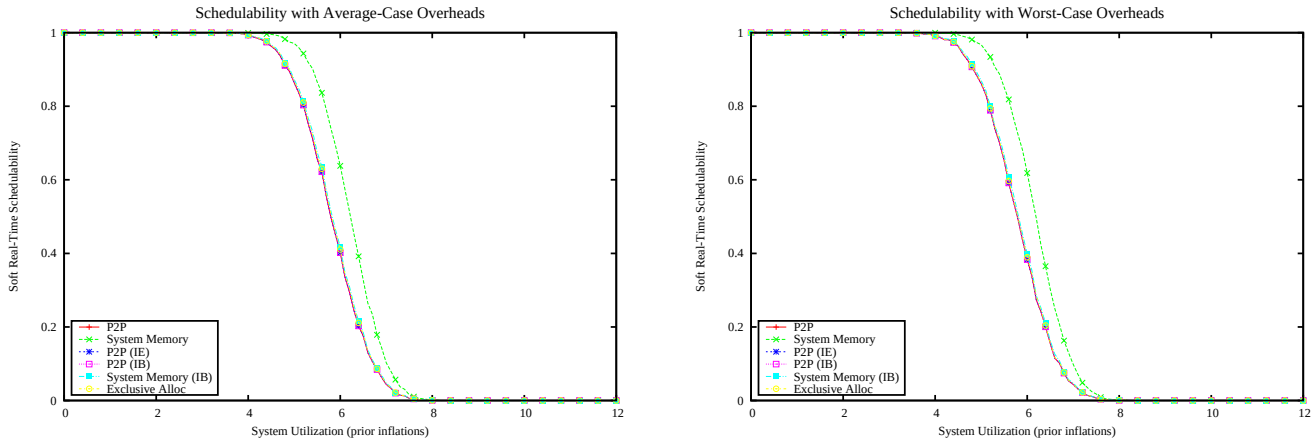

Figure 7274: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

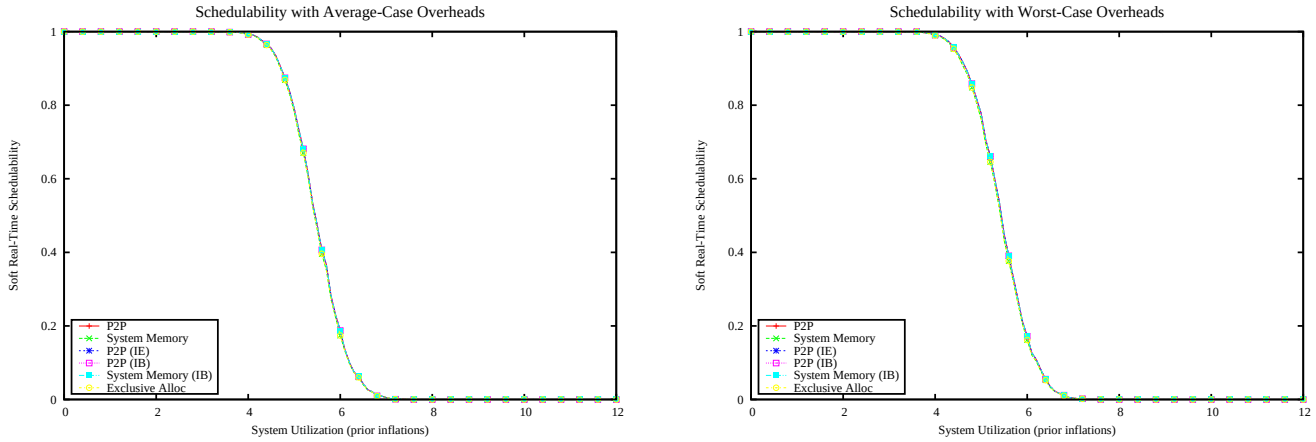

Figure 7275: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

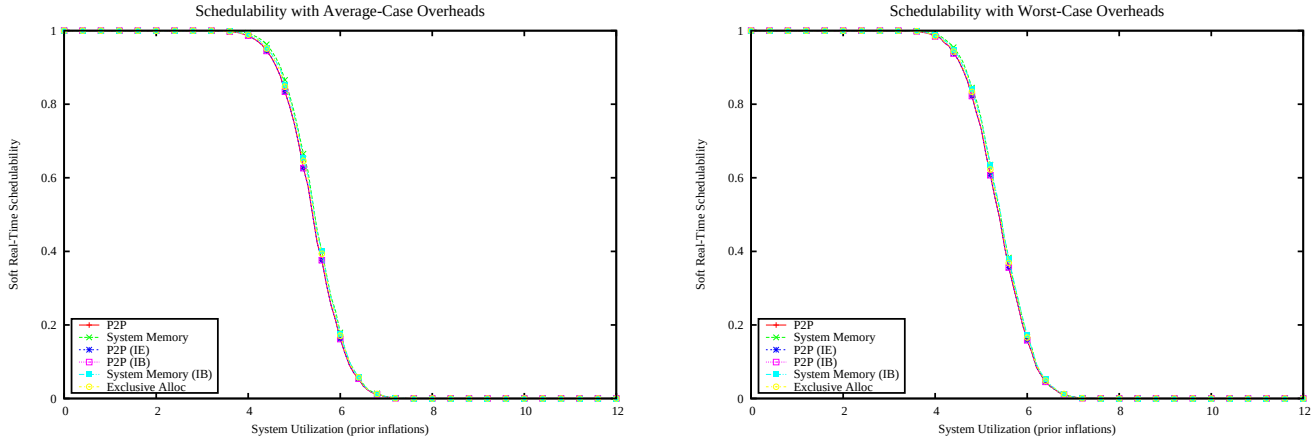

Figure 7276: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

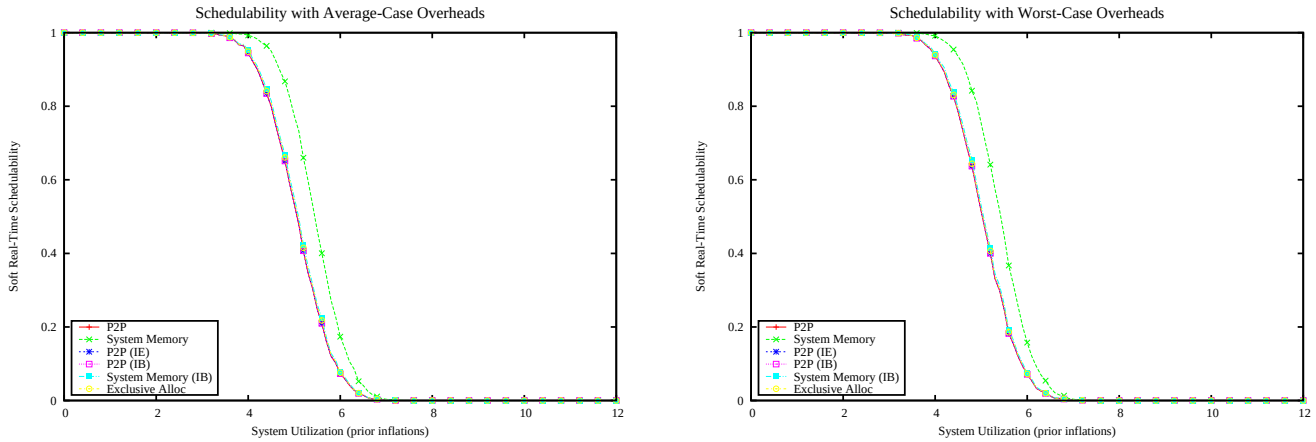

Figure 7277: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

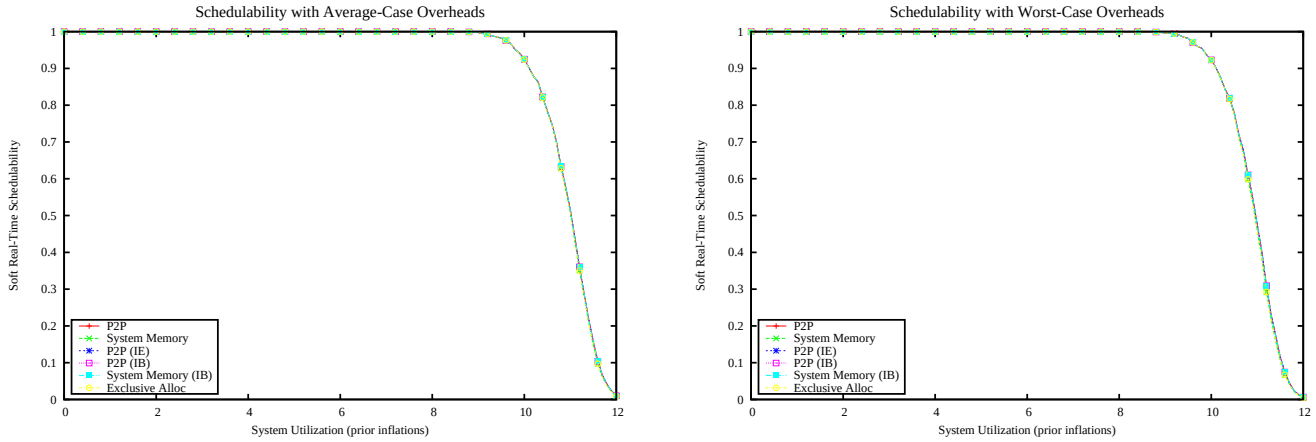

Figure 7278: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

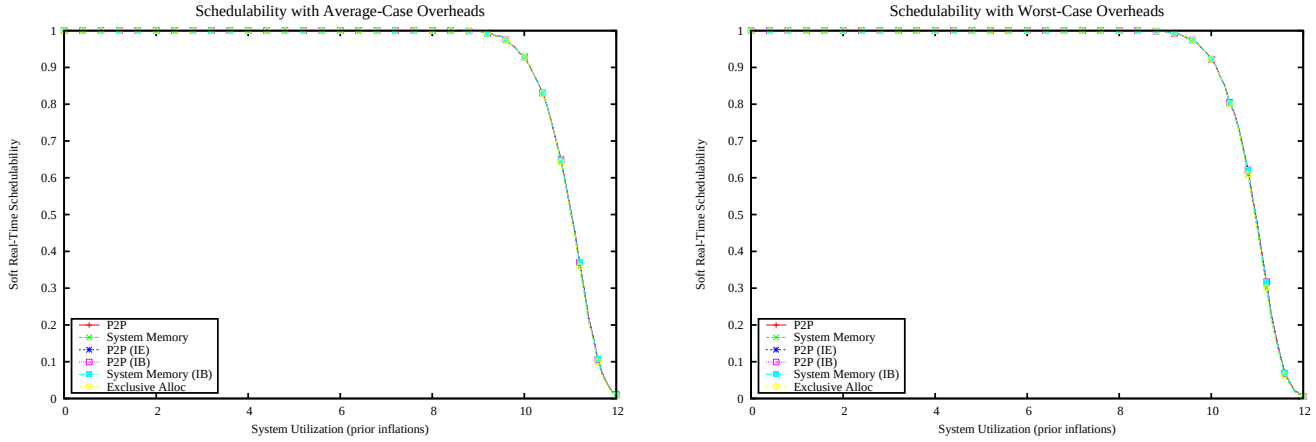

Figure 7279: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

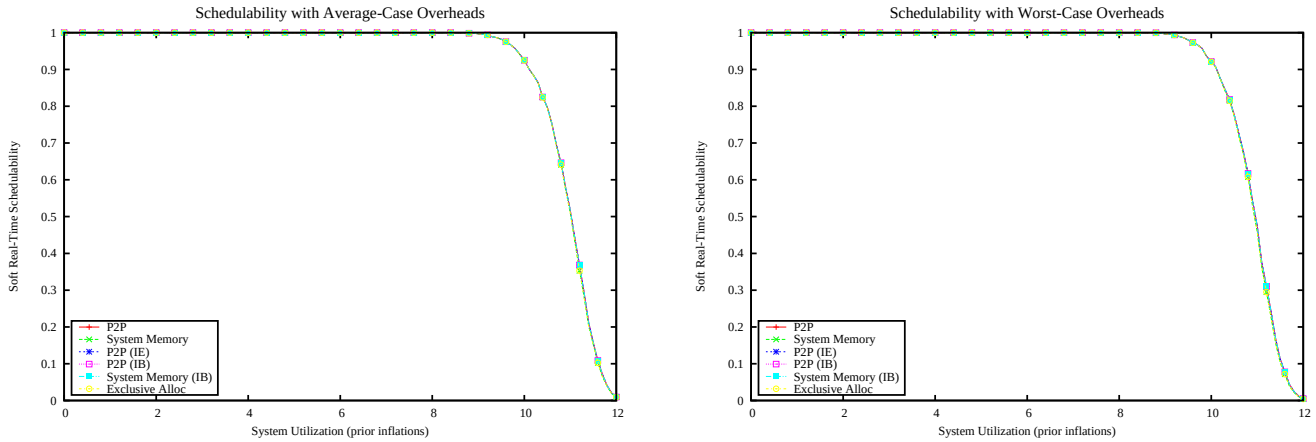

Figure 7280: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

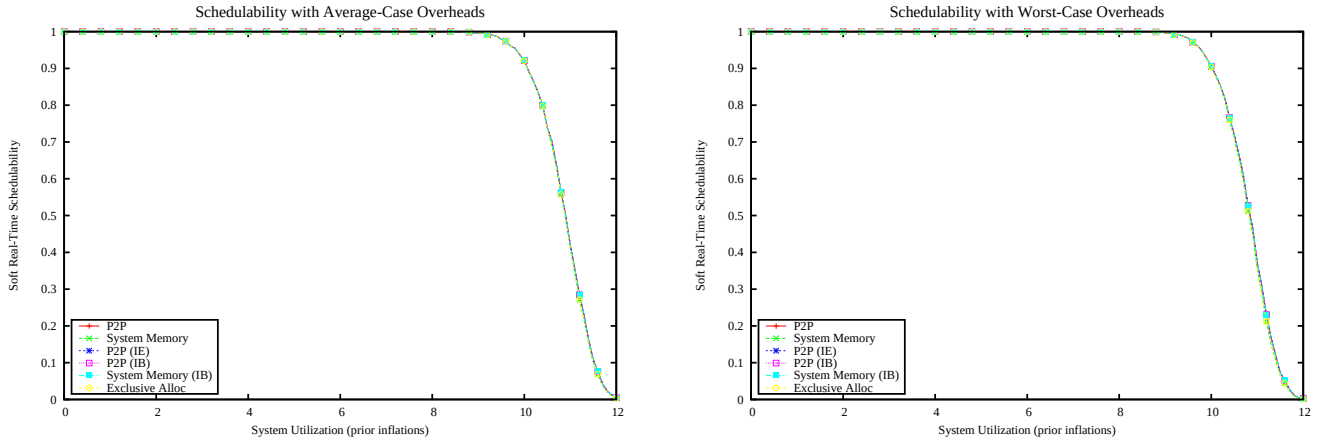

Figure 7281: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

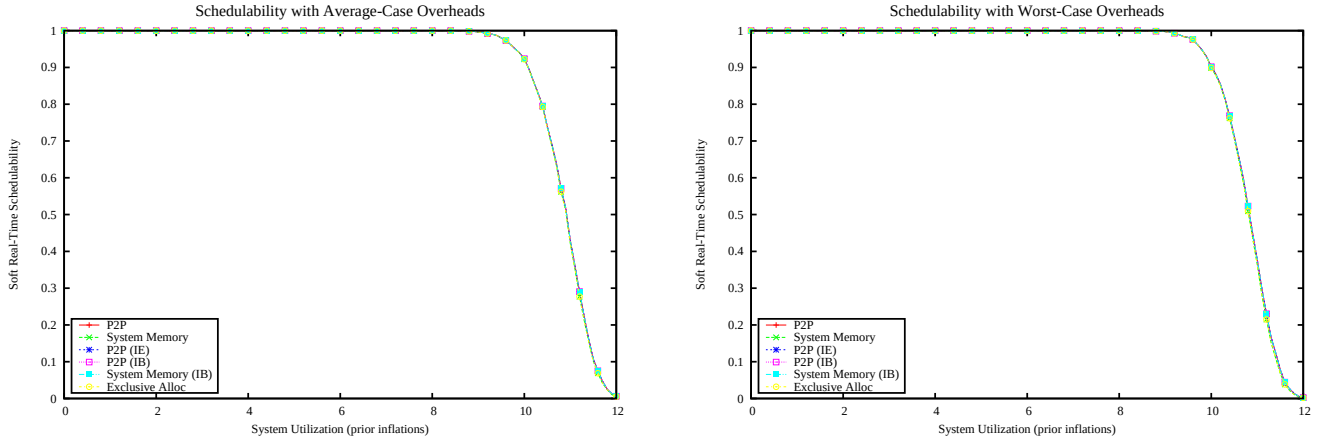

Figure 7282: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

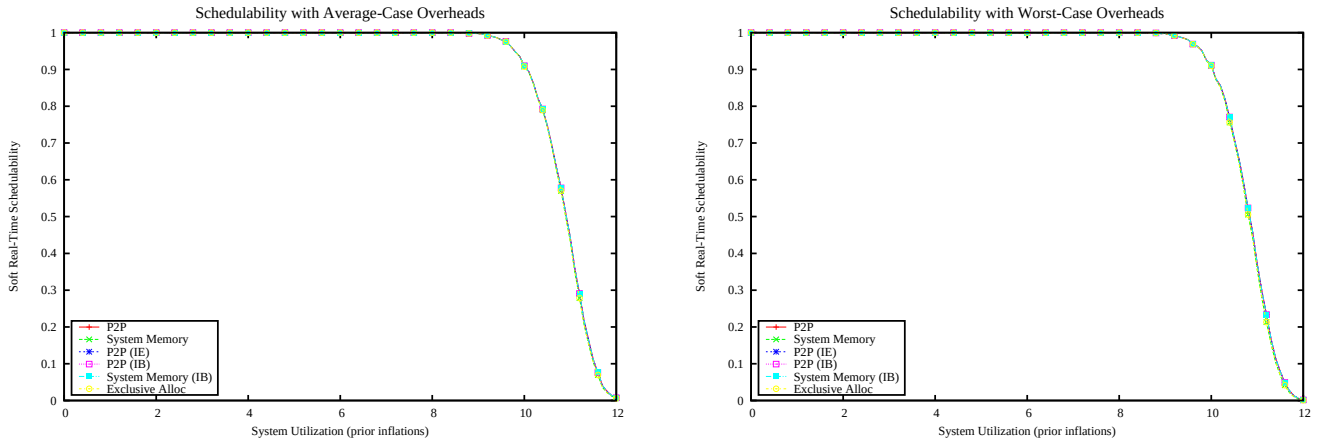

Figure 7283: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

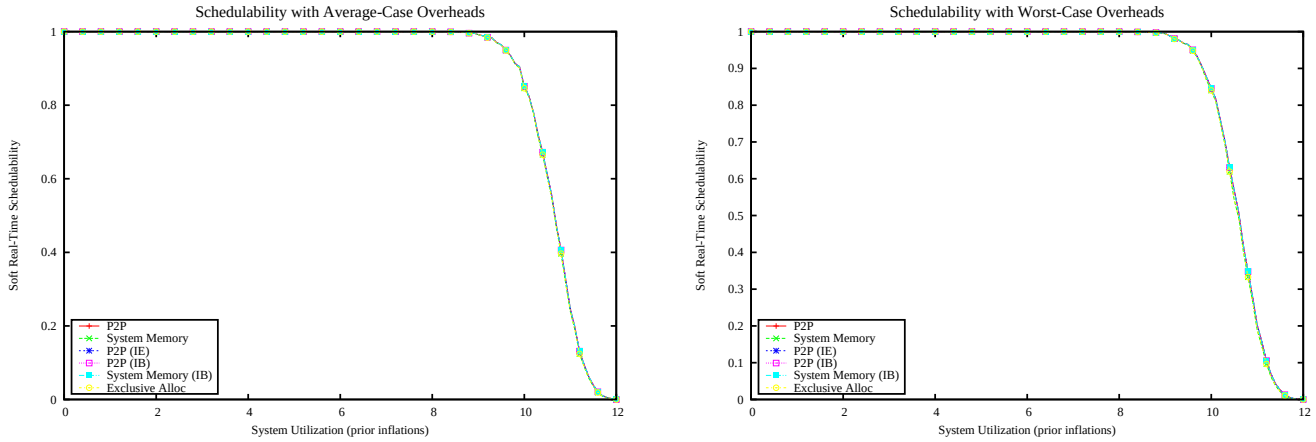

Figure 7284: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

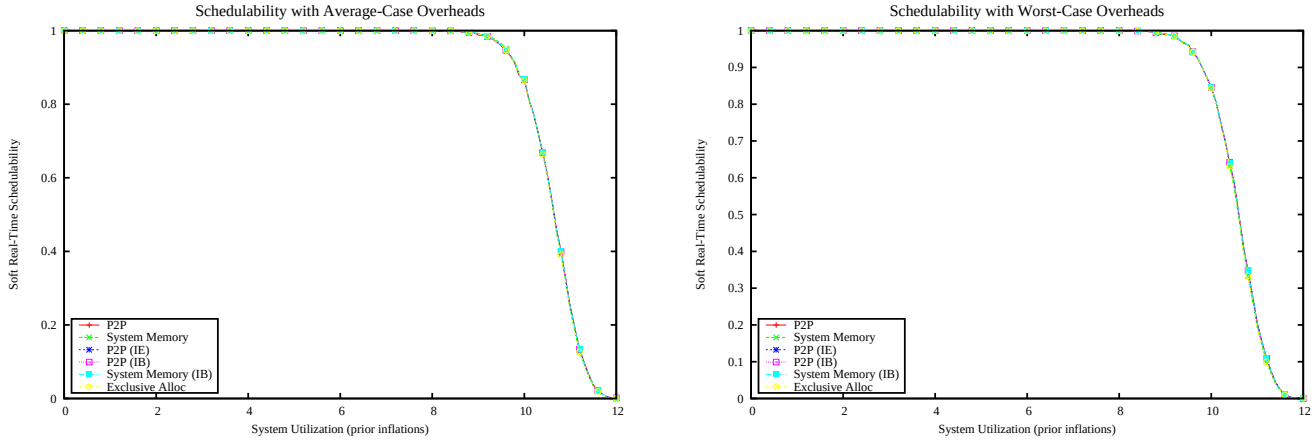

Figure 7285: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

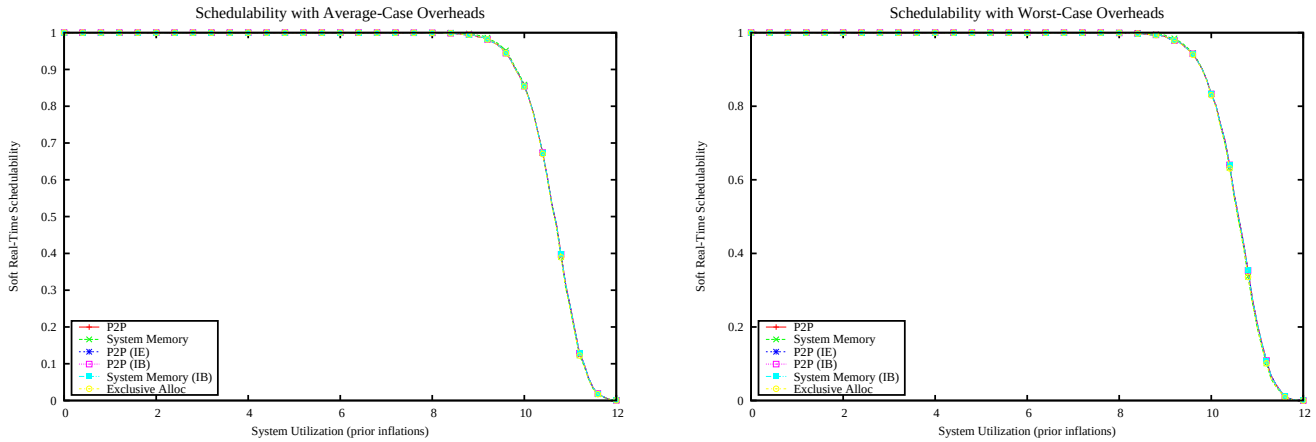

Figure 7286: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

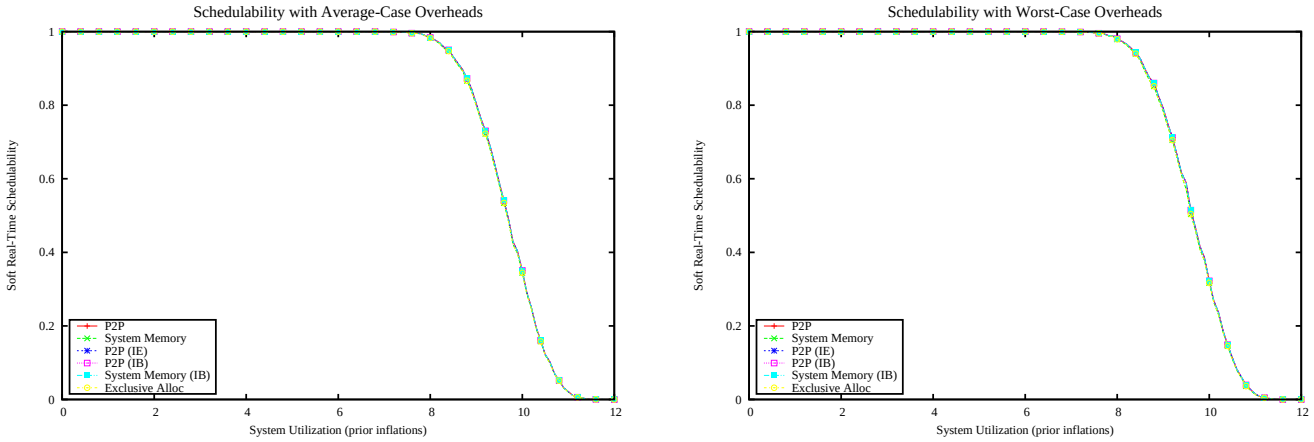

Figure 7287: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

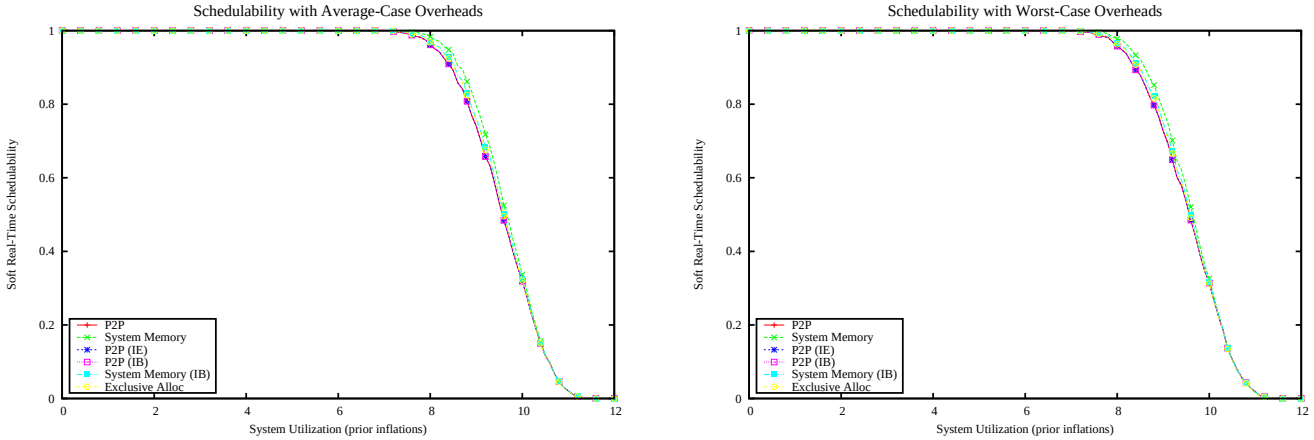

Figure 7288: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

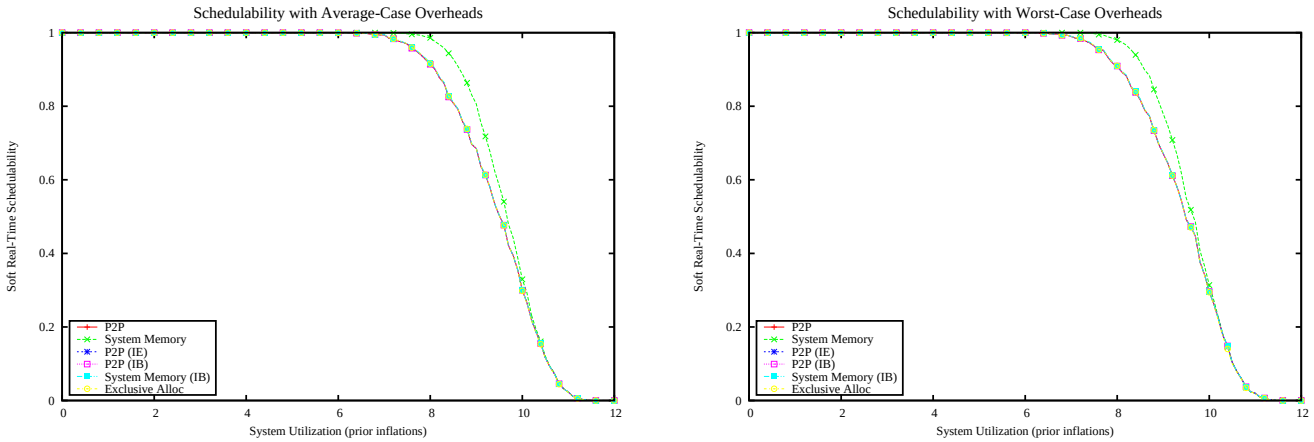

Figure 7289: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

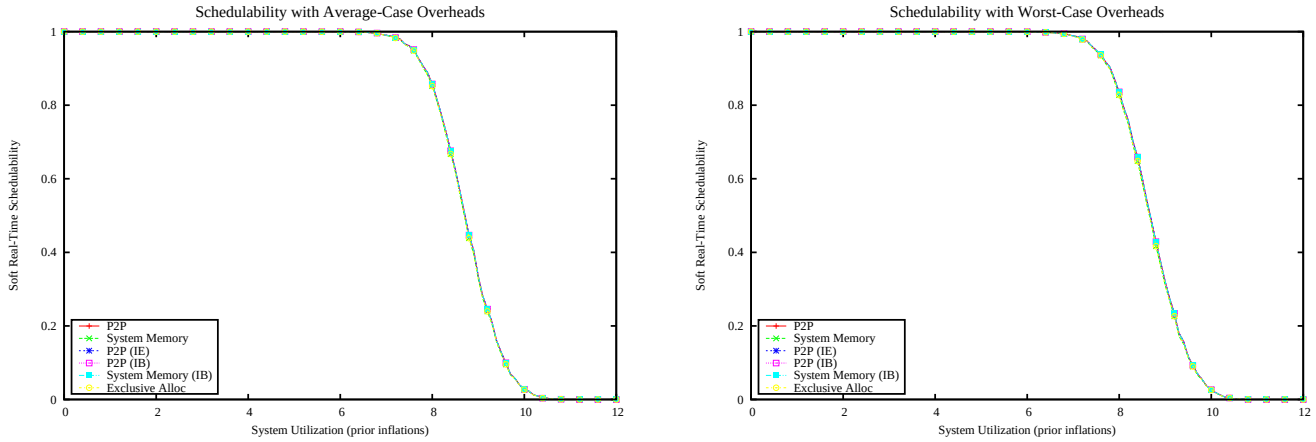

Figure 7290: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

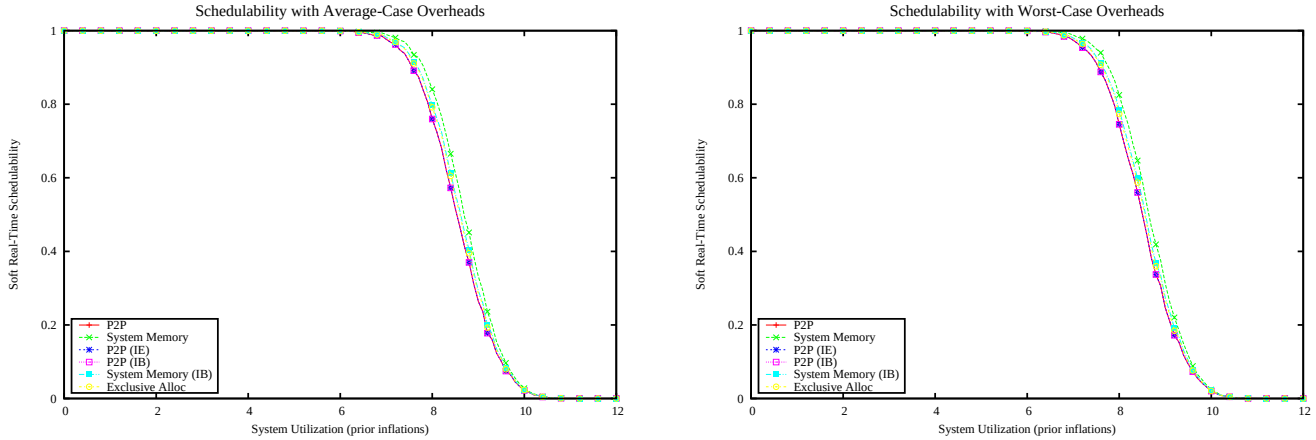

Figure 7291: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

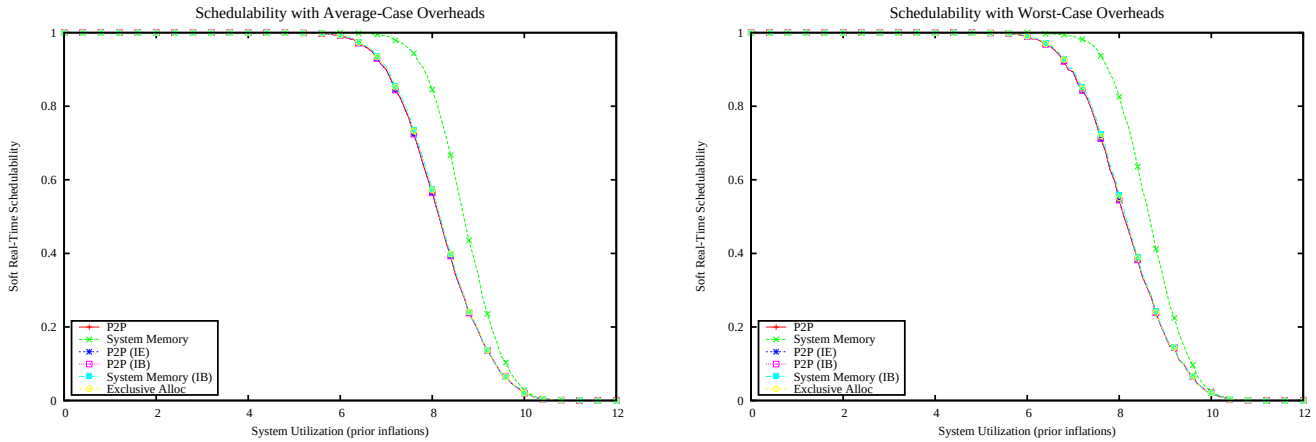

Figure 7292: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

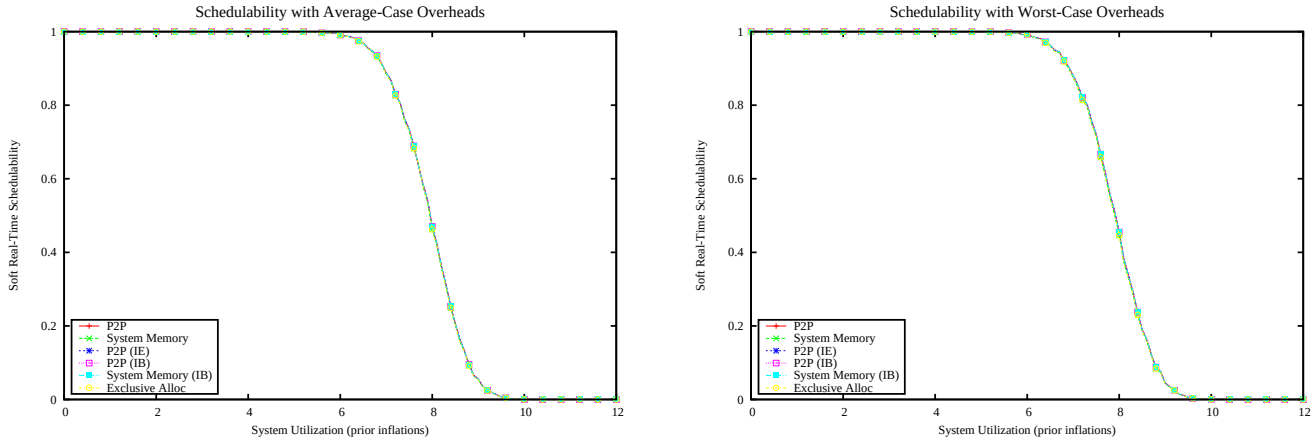

Figure 7293: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

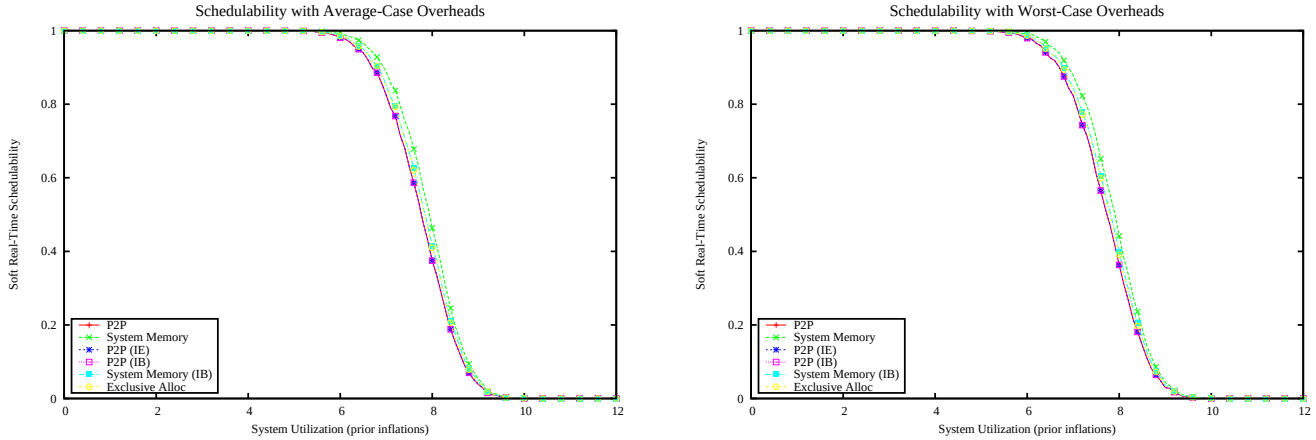

Figure 7294: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

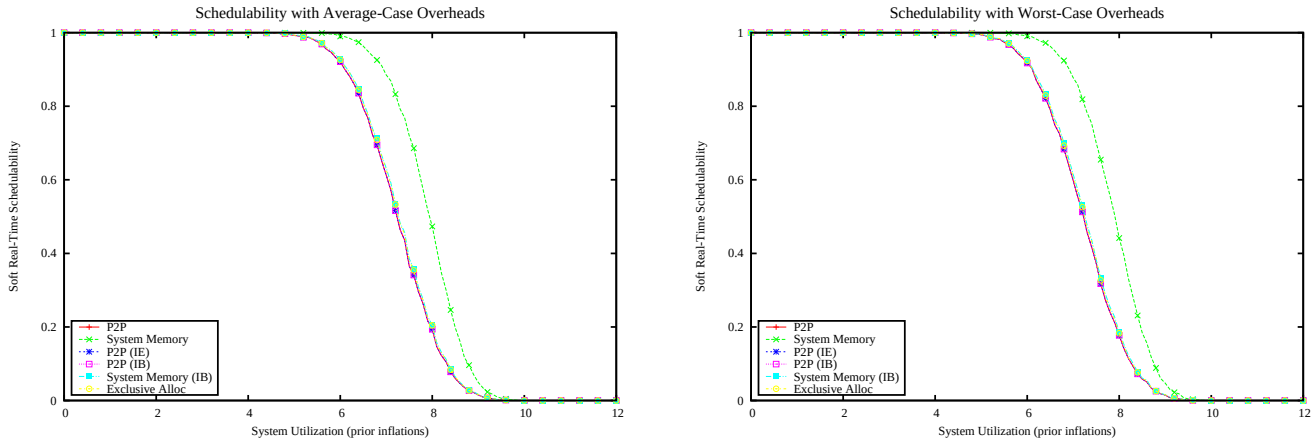

Figure 7295: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

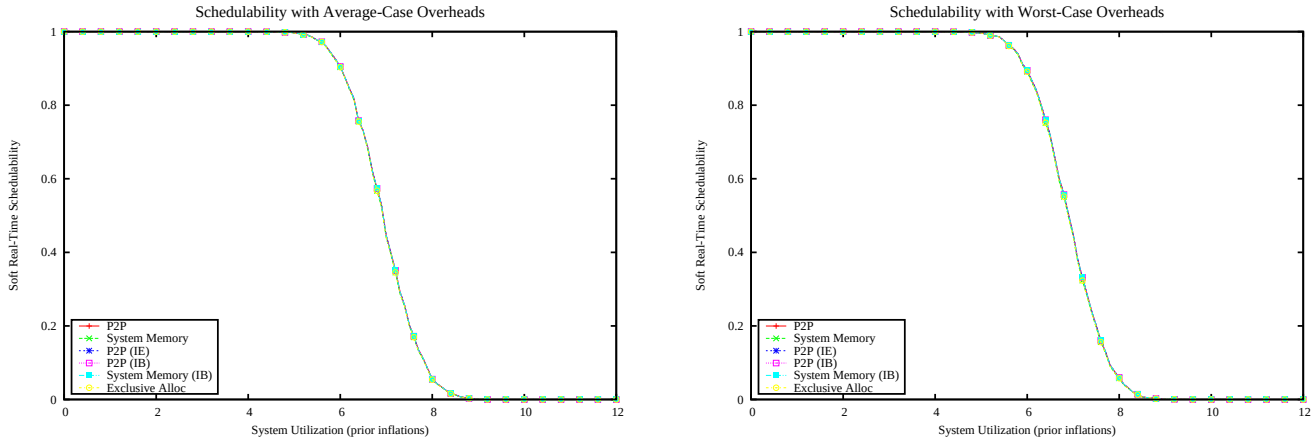

Figure 7296: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

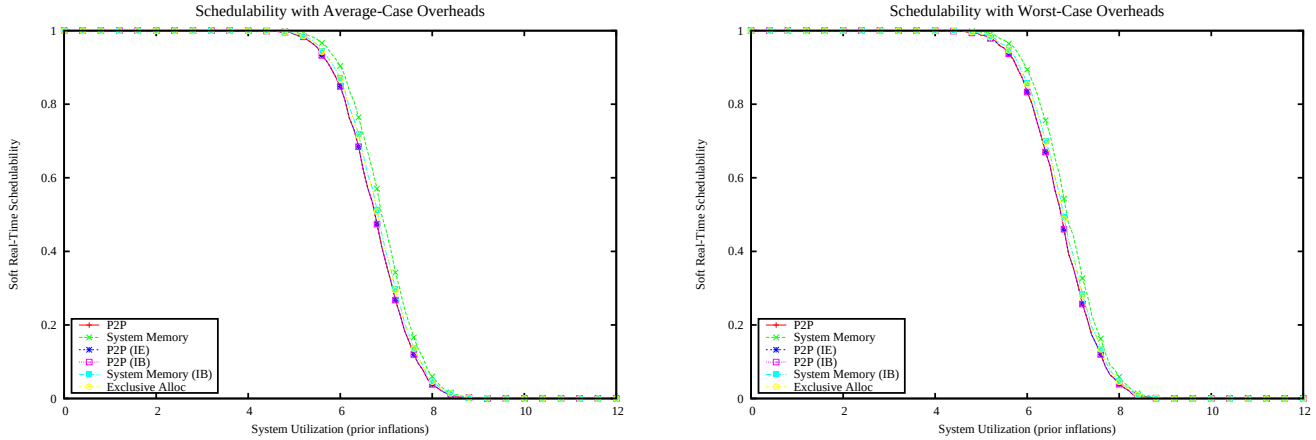

Figure 7297: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

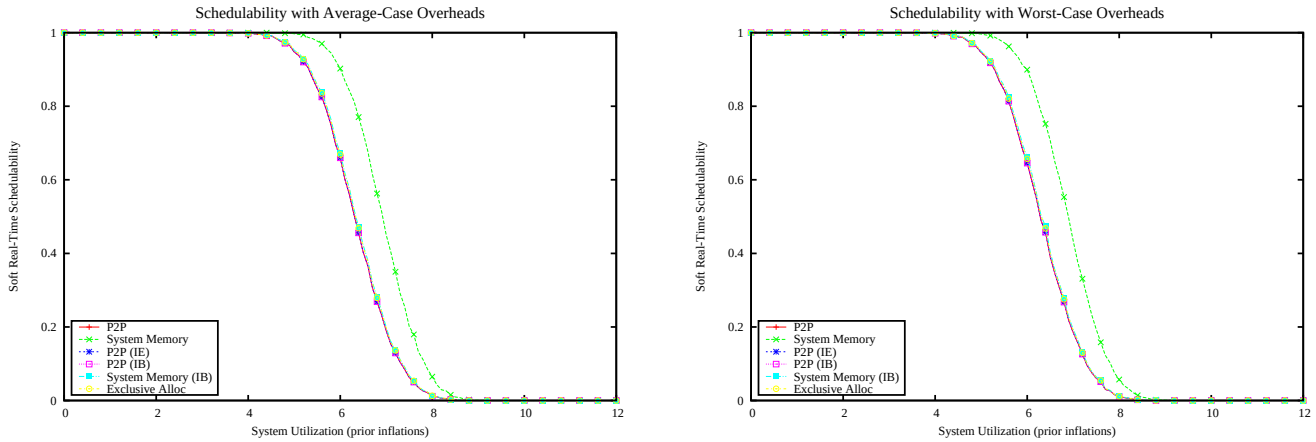

Figure 7298: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

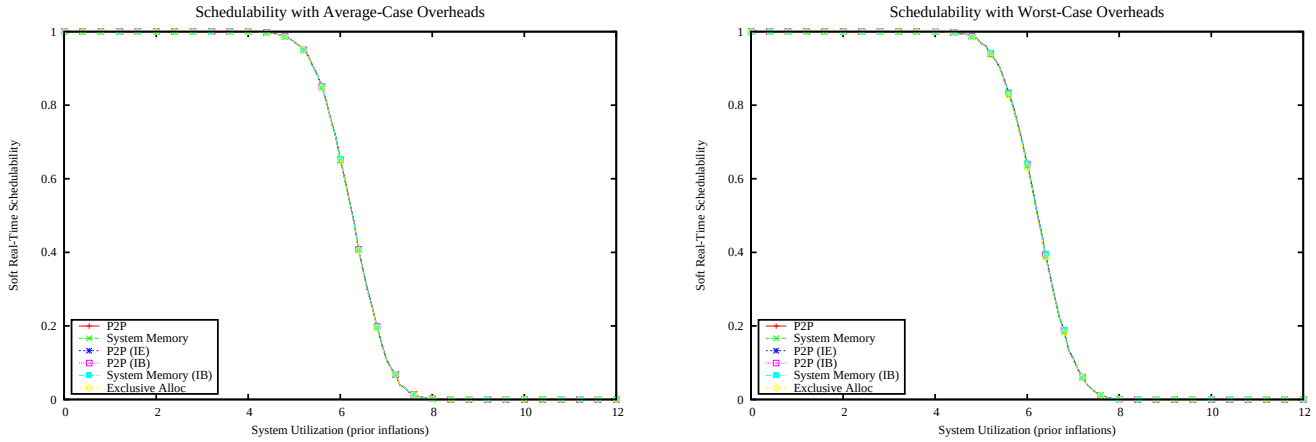

Figure 7299: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

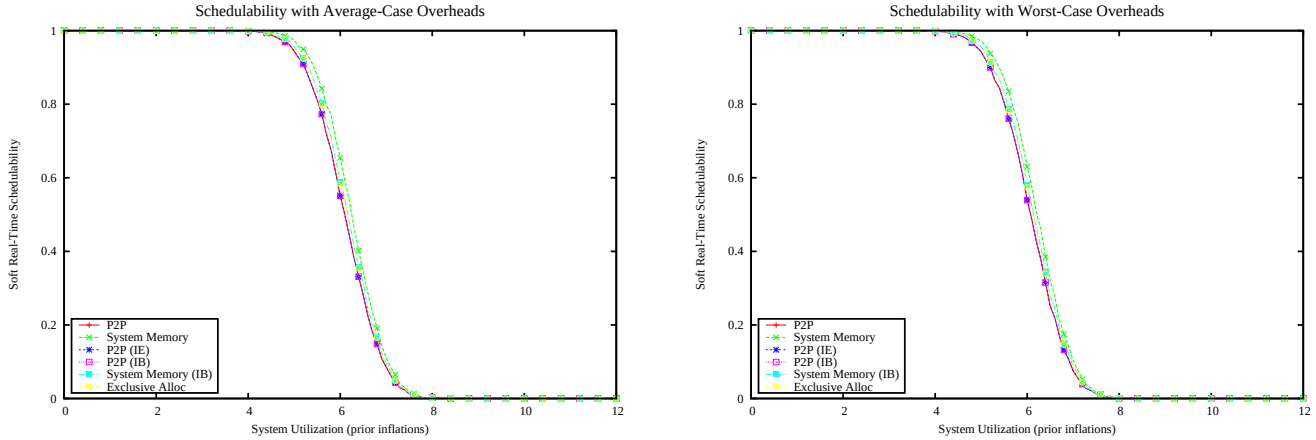

Figure 7300: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

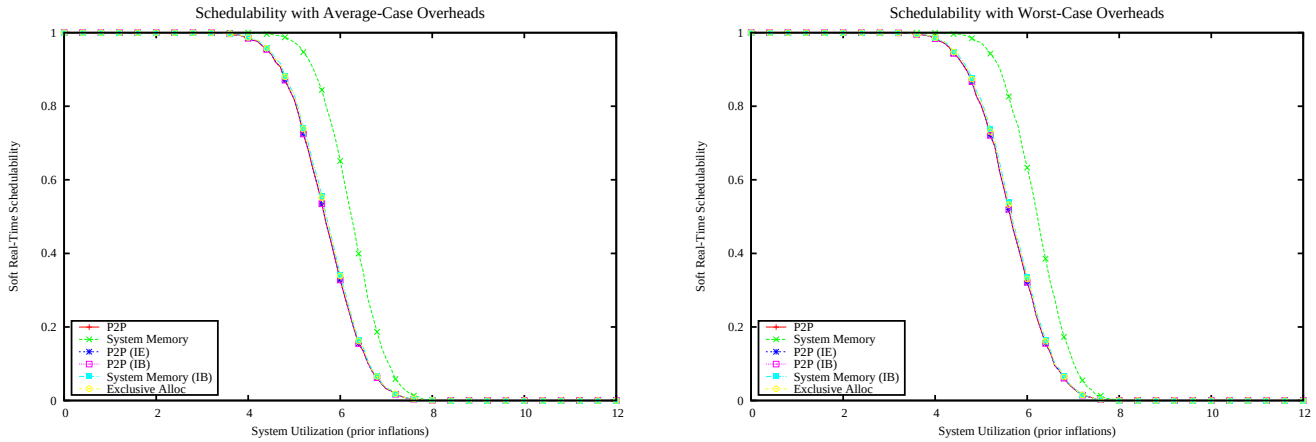

Figure 7301: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

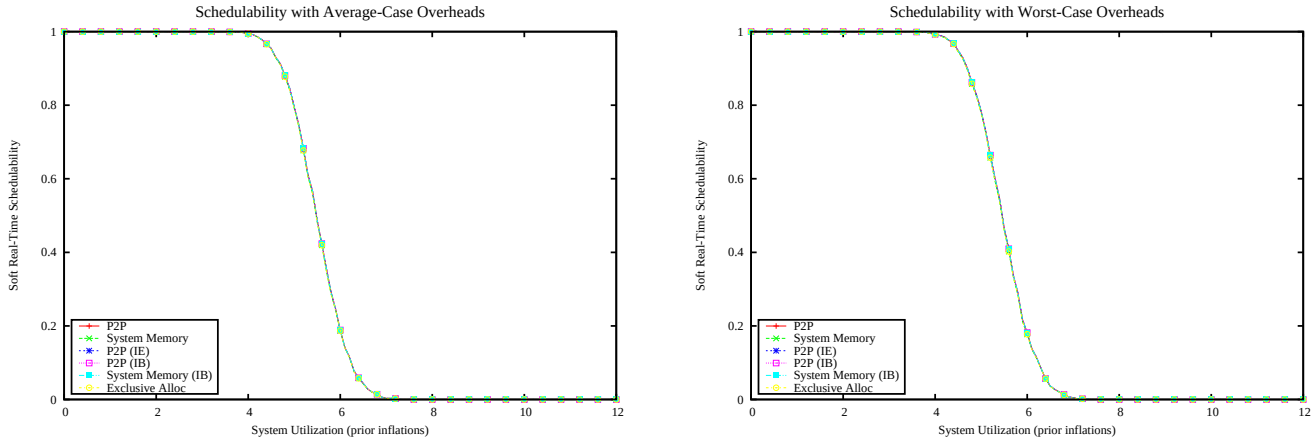

Figure 7302: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

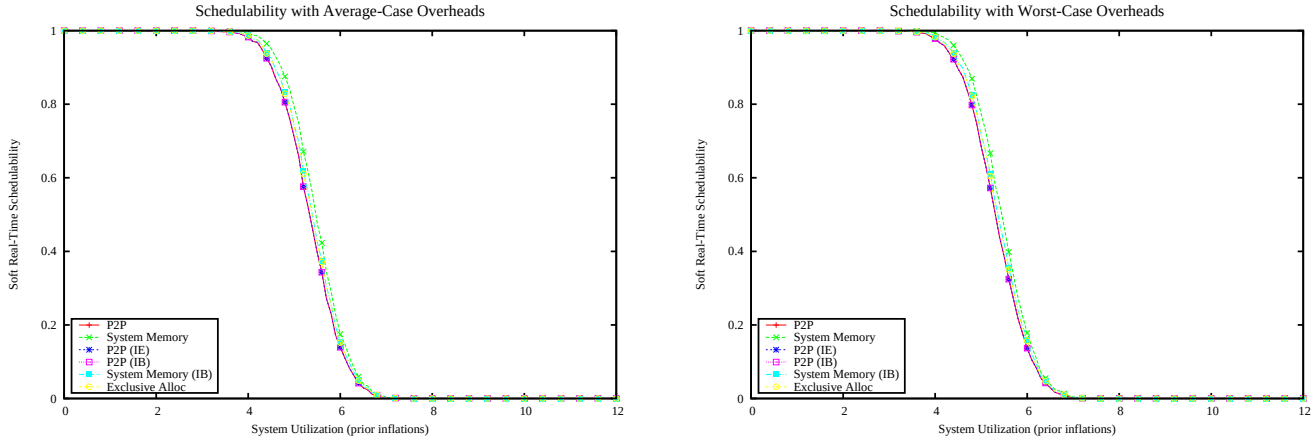

Figure 7303: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

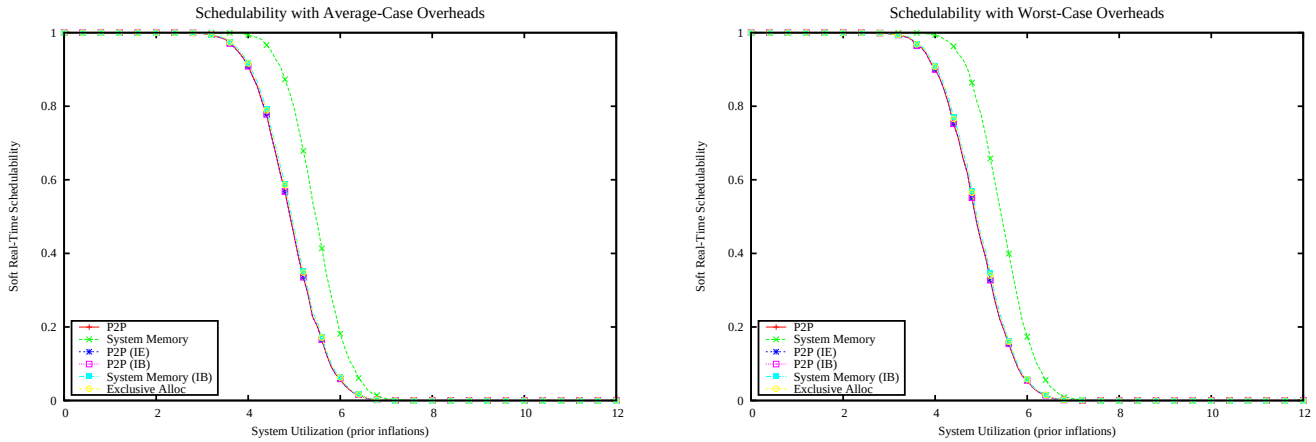

Figure 7304: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

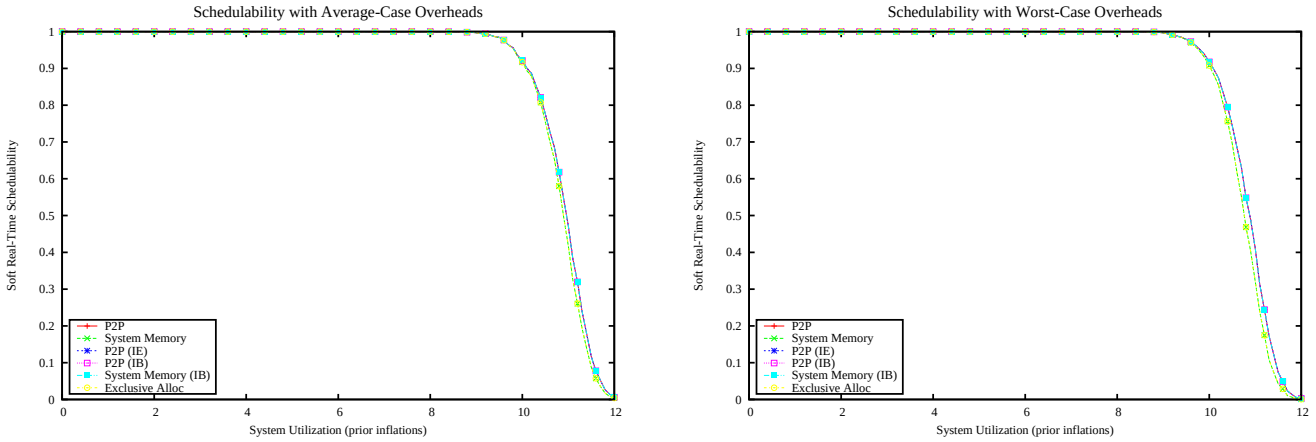

Figure 7305: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

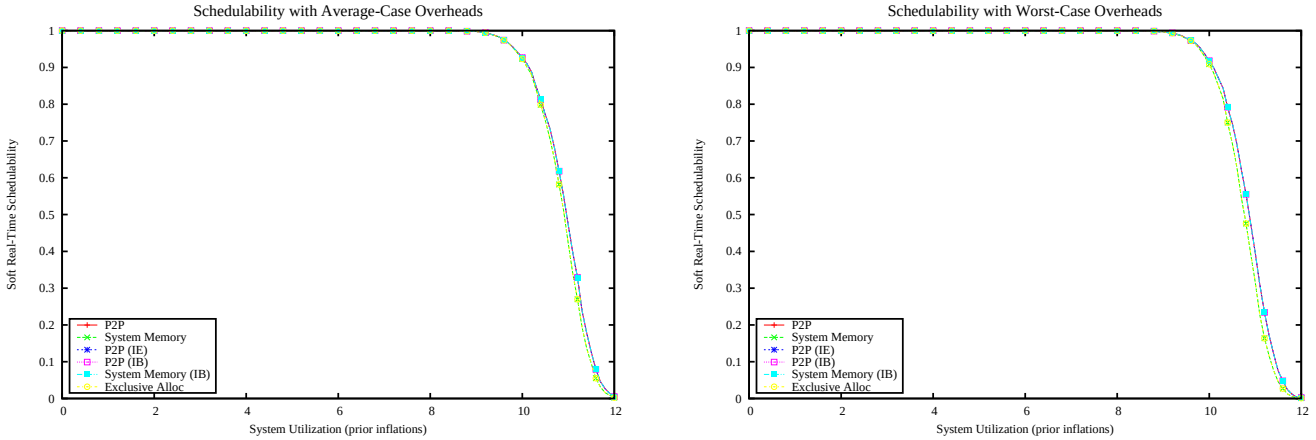

Figure 7306: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

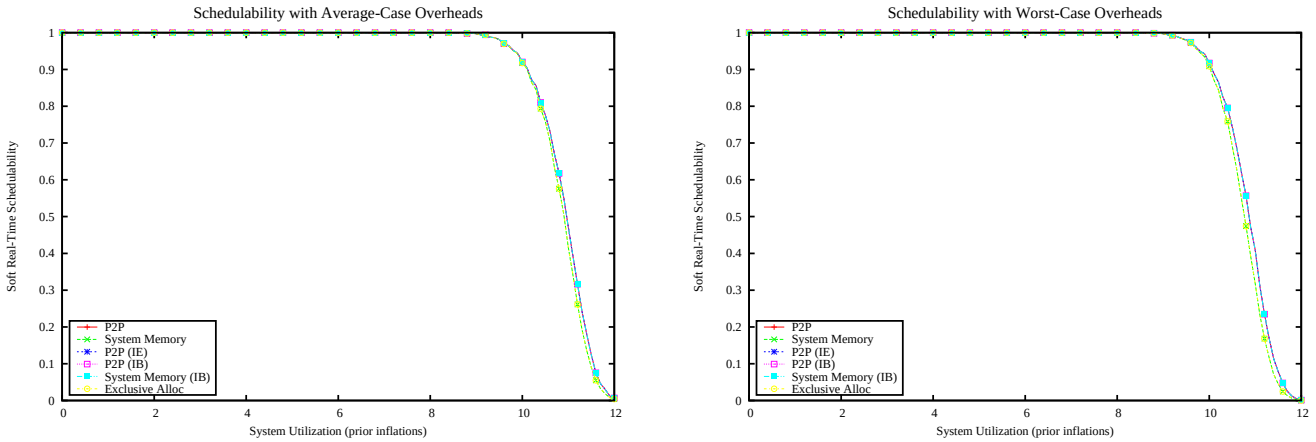

Figure 7307: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

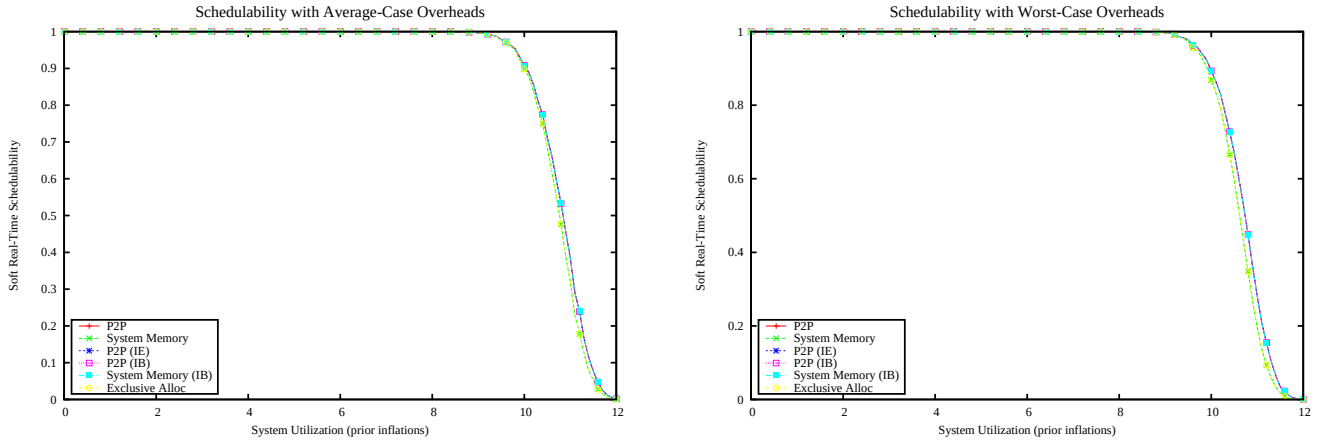

Figure 7308: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

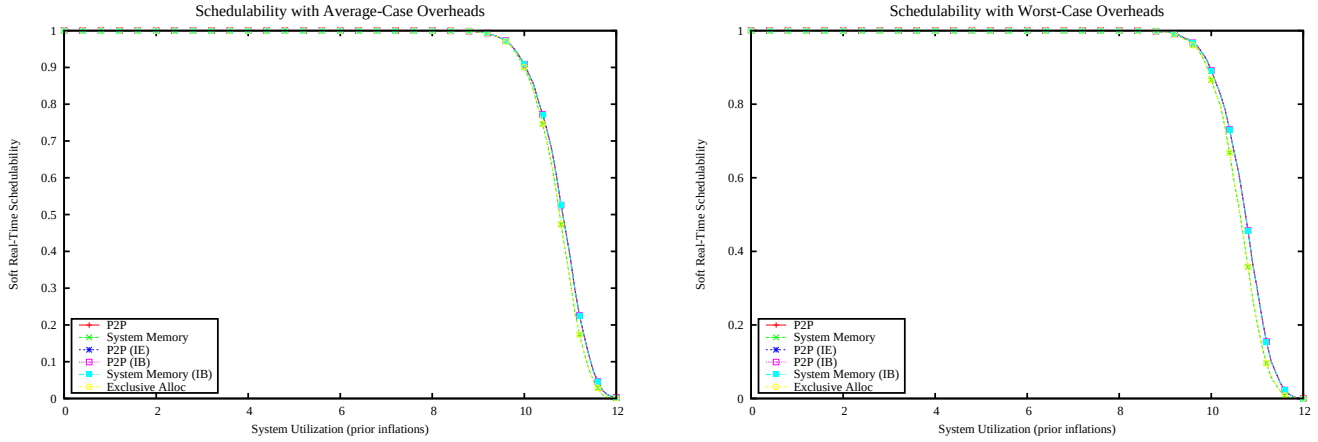

Figure 7309: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

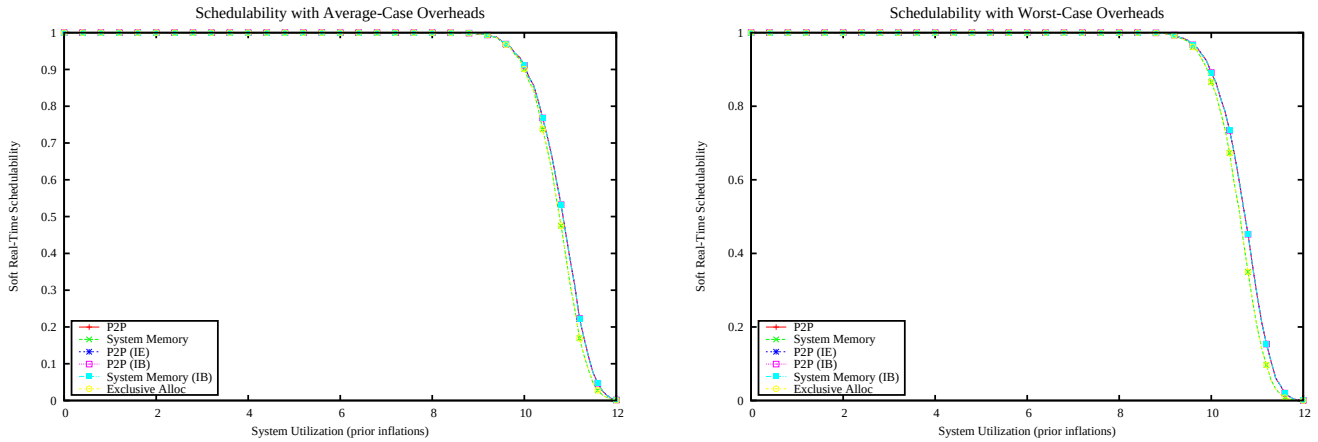

Figure 7310: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

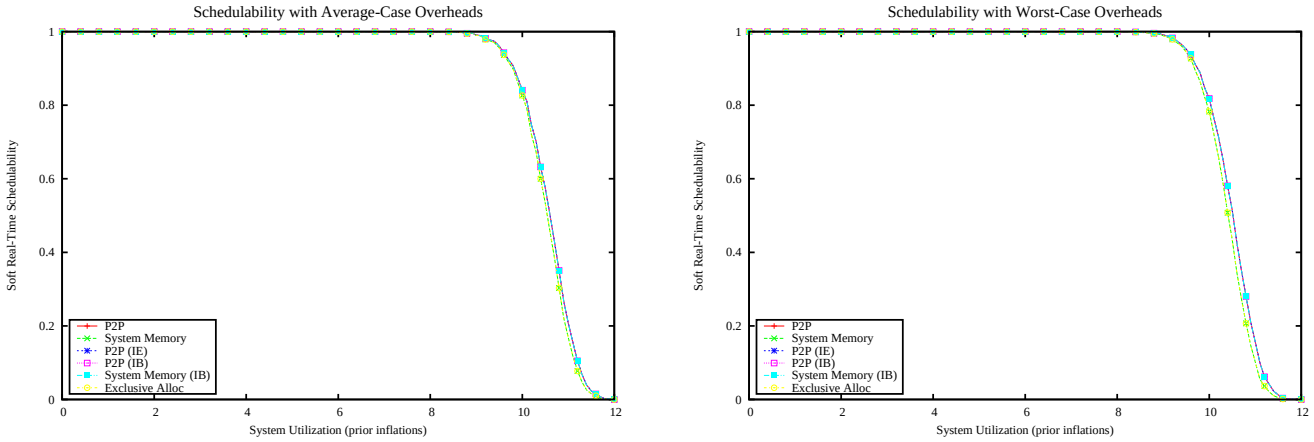

Figure 7311: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

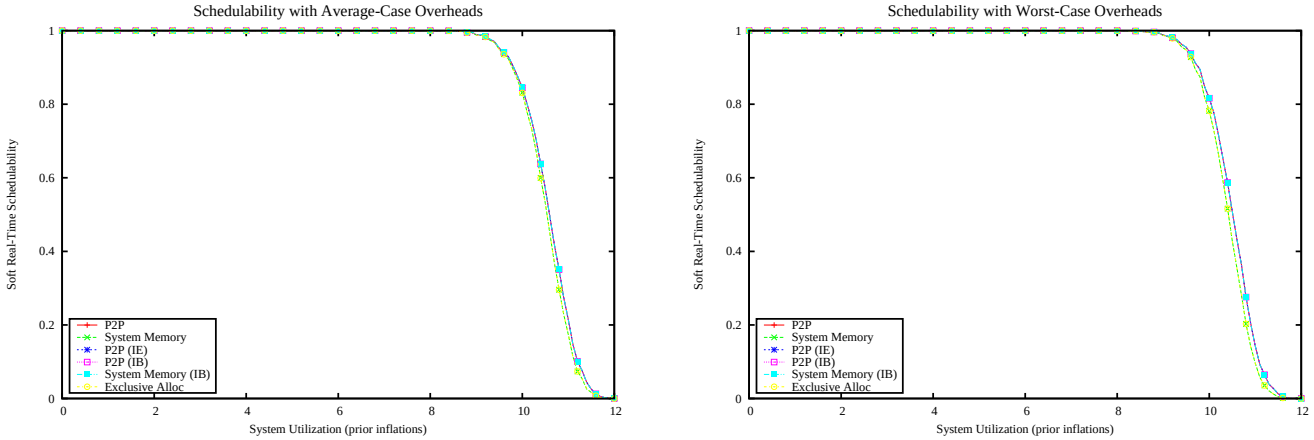

Figure 7312: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

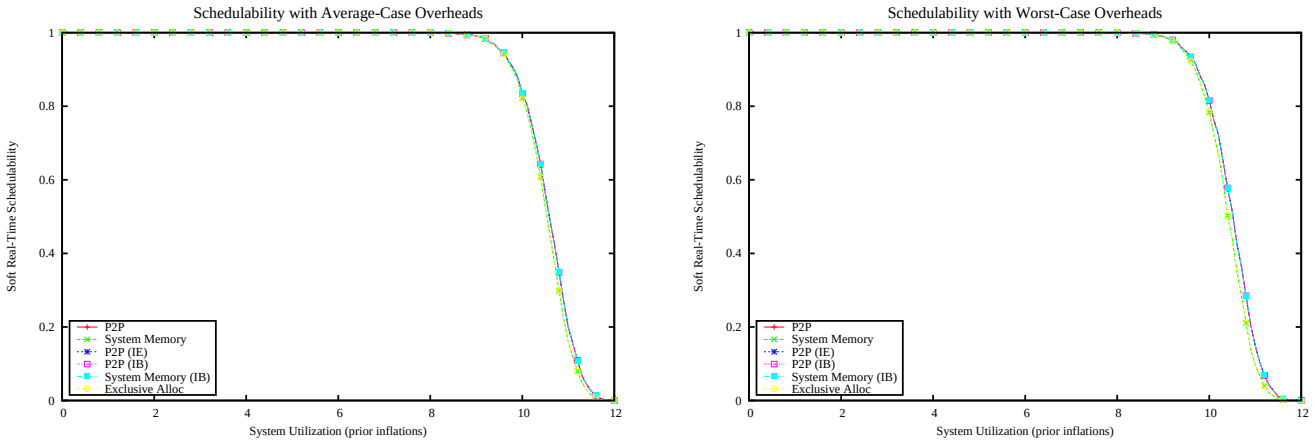

Figure 7313: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

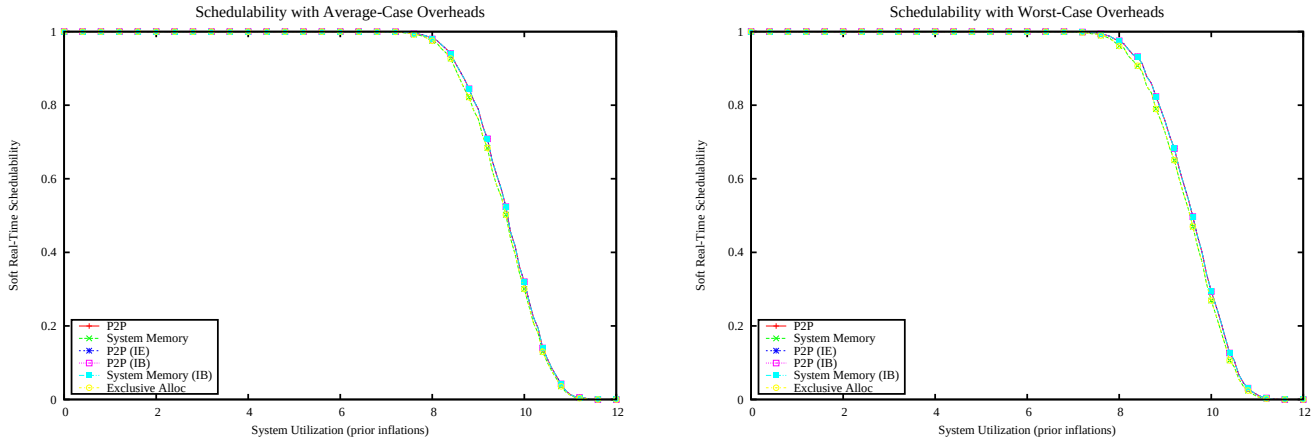

Figure 7314: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

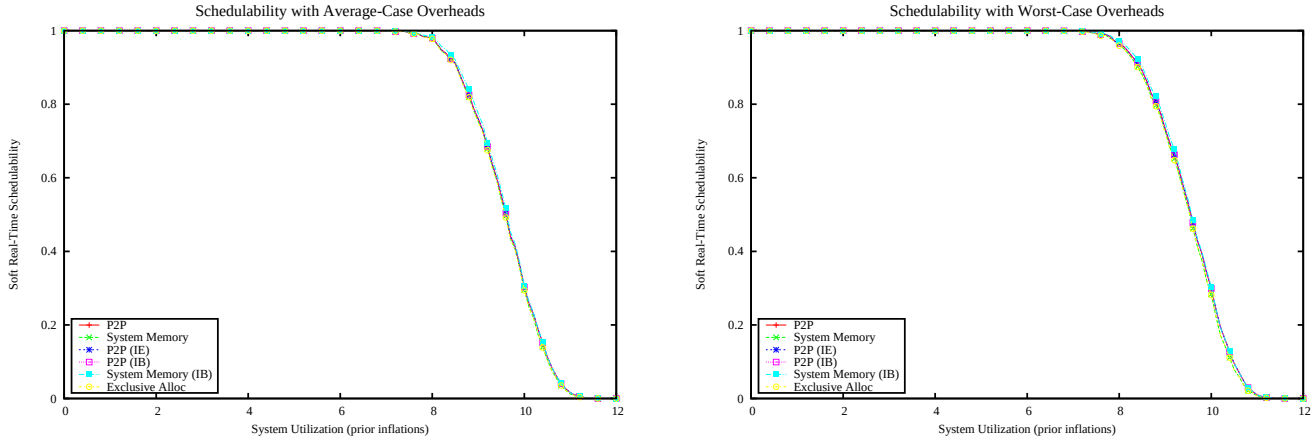

Figure 7315: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

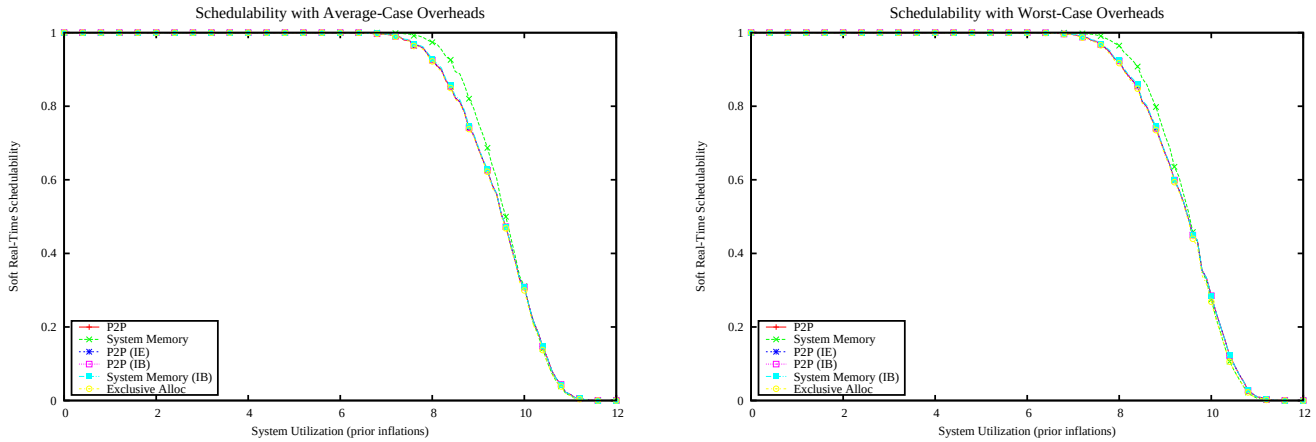

Figure 7316: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

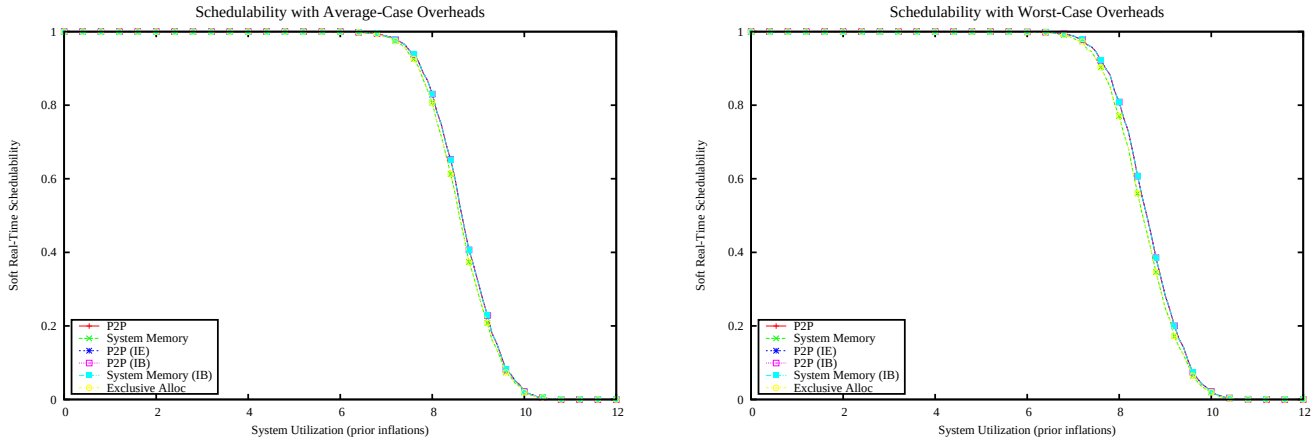

Figure 7317: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

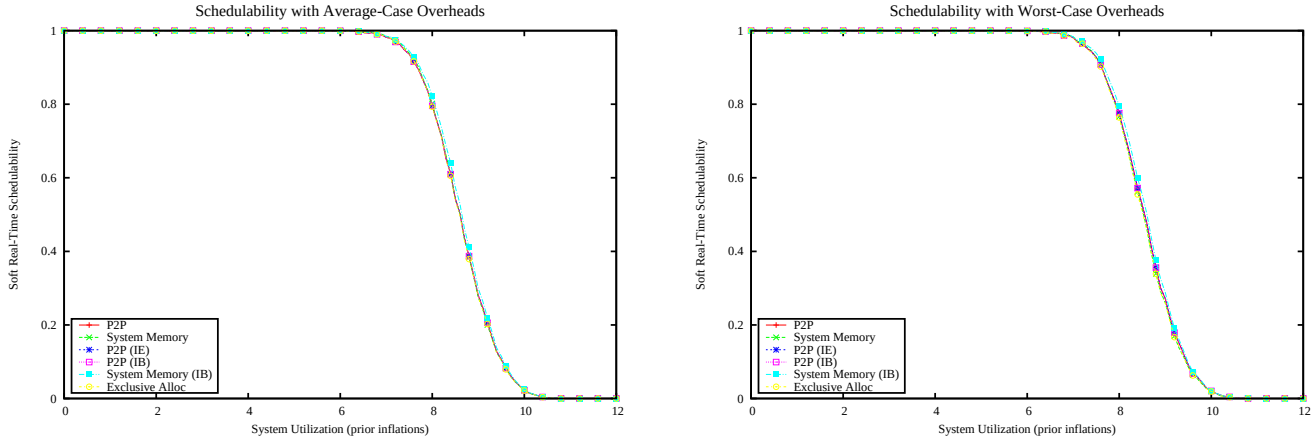

Figure 7318: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

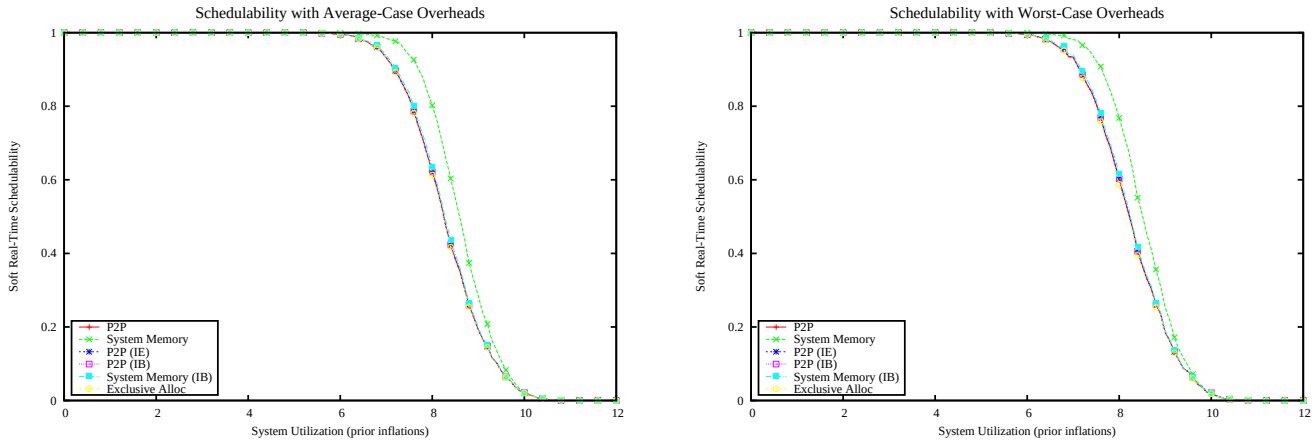

Figure 7319: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

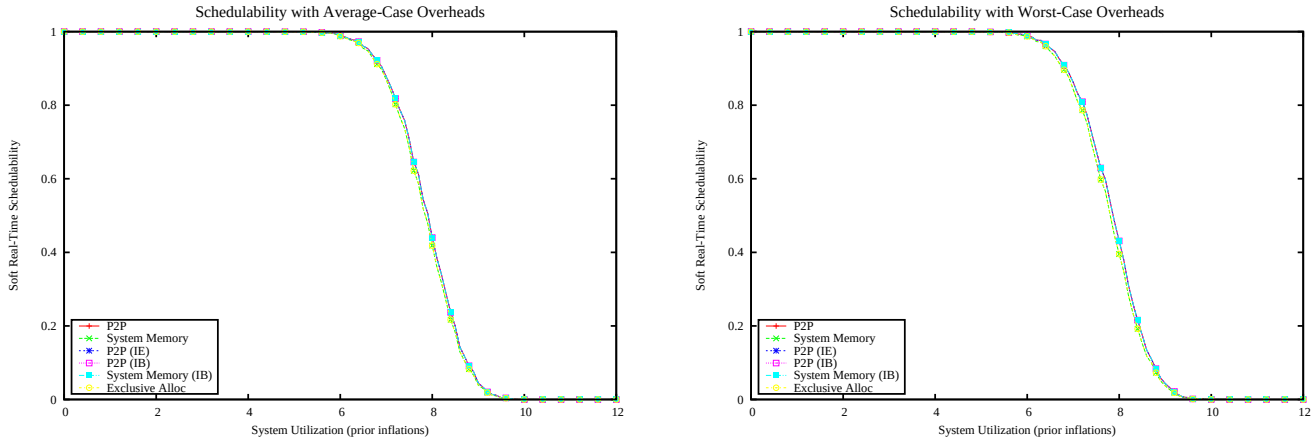

Figure 7320: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

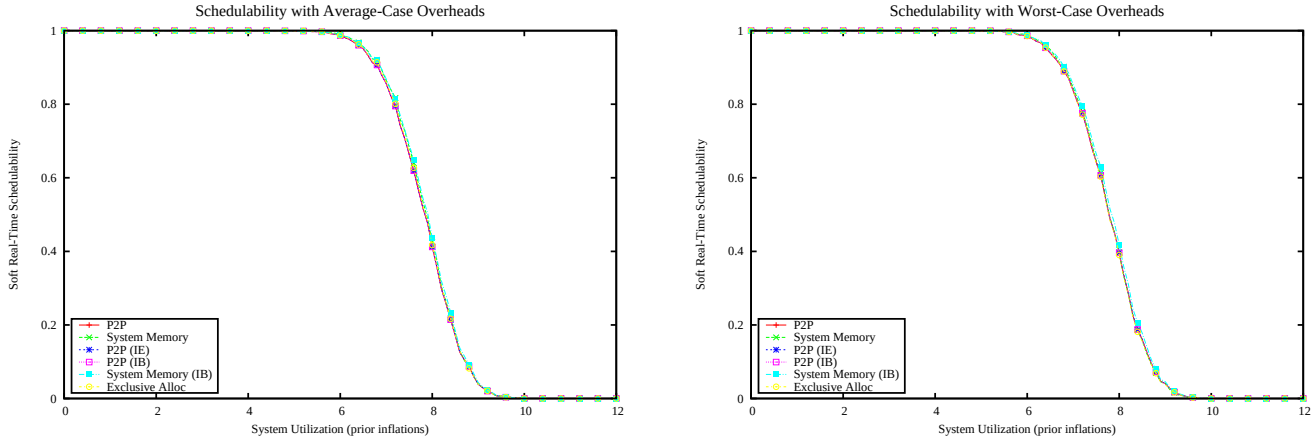

Figure 7321: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

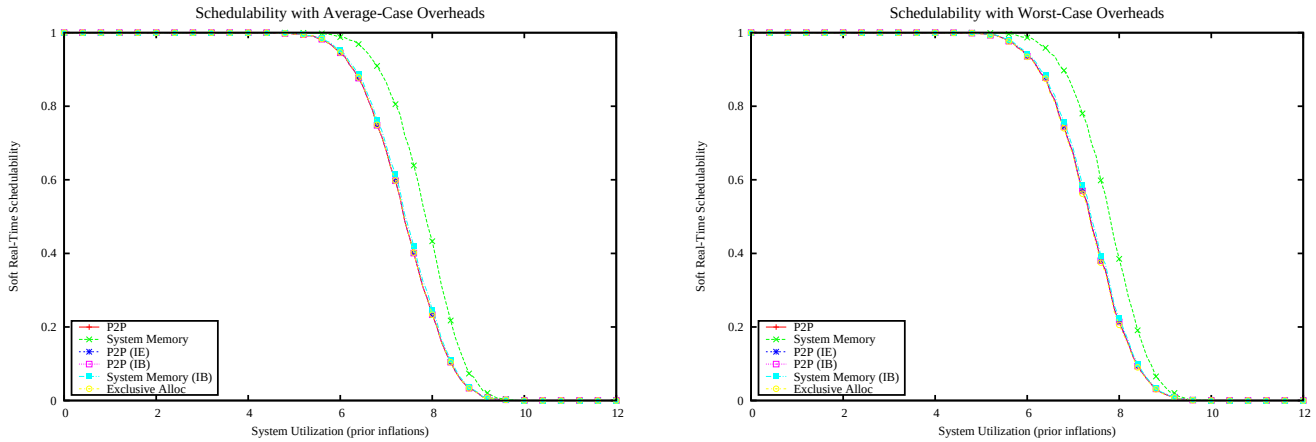

Figure 7322: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

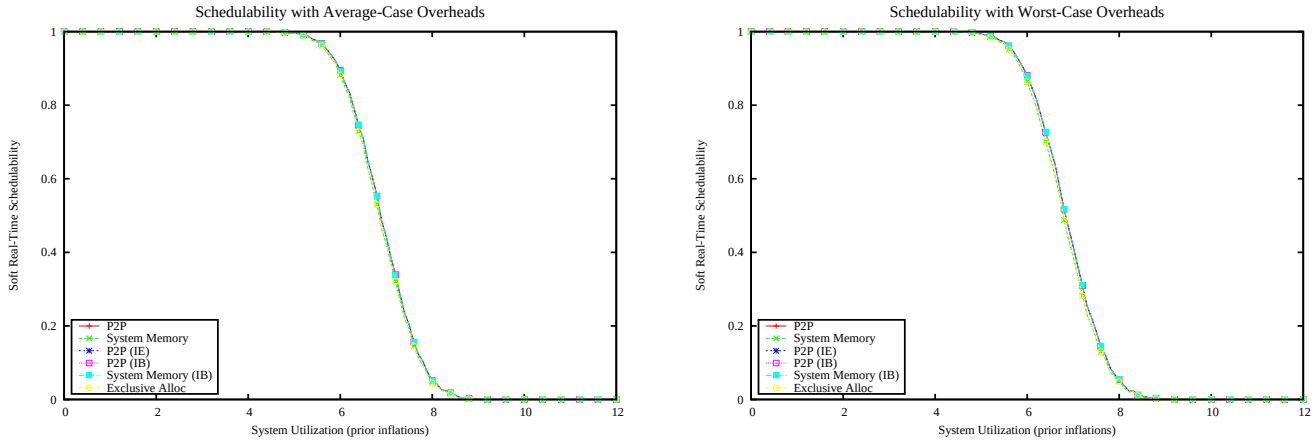

Figure 7323: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

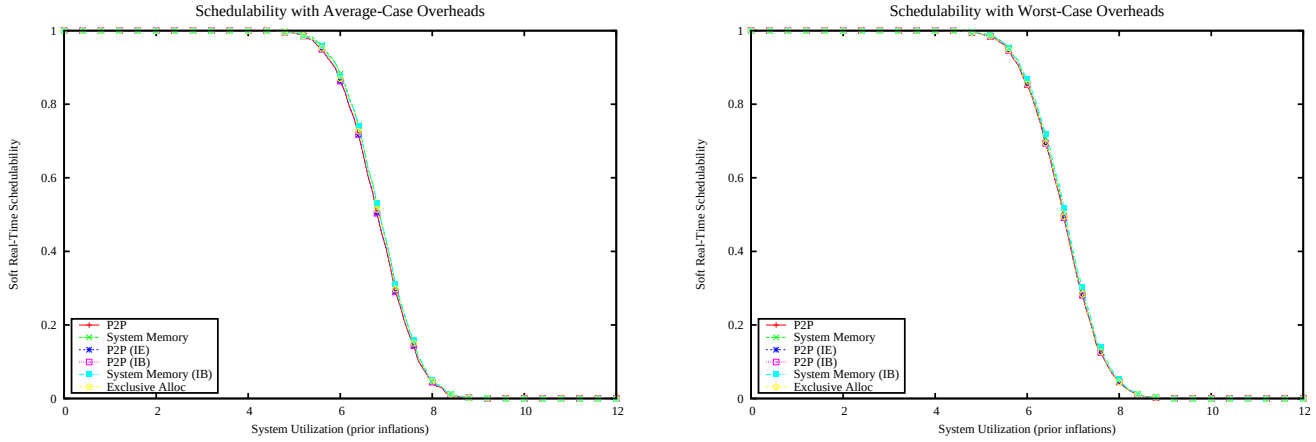

Figure 7324: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

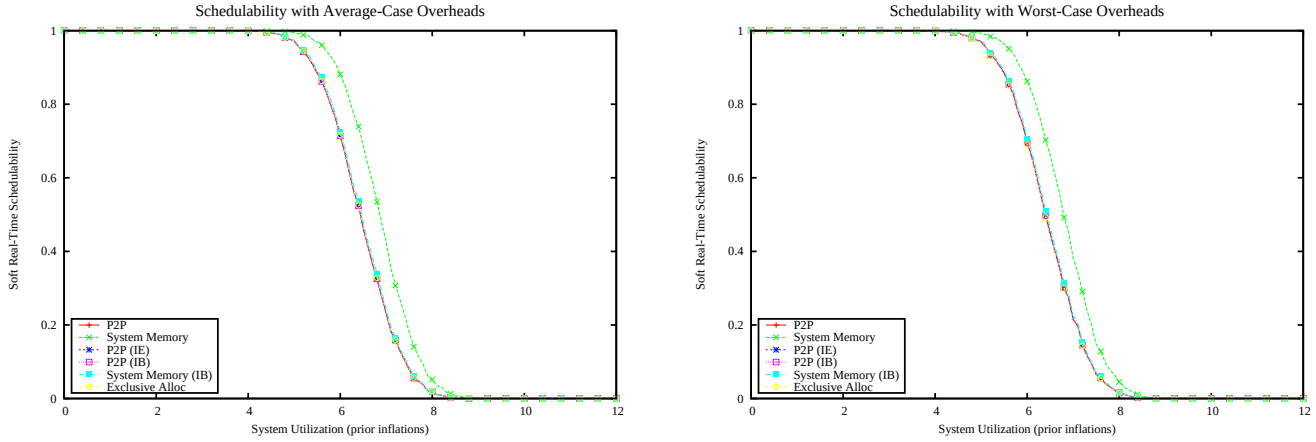

Figure 7325: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

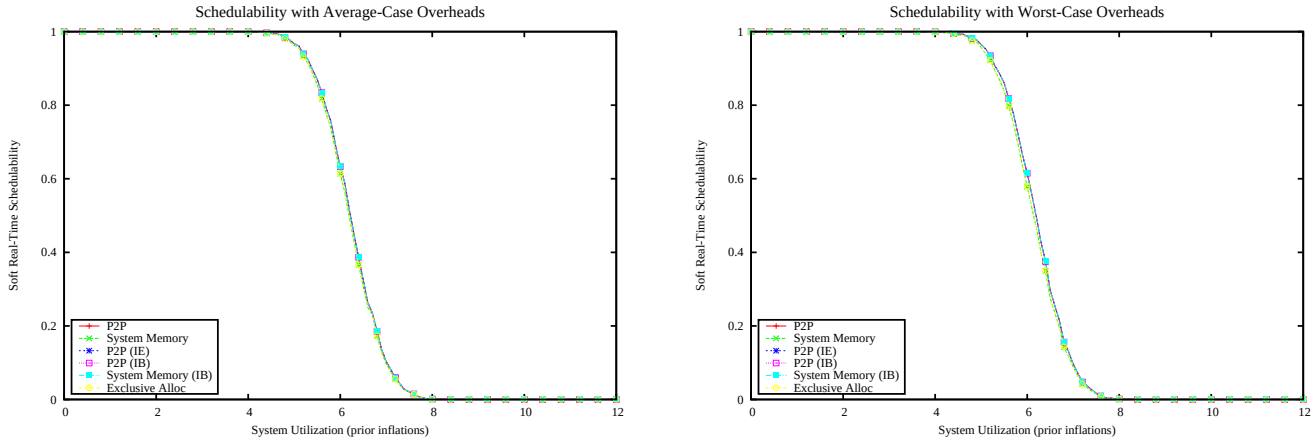

Figure 7326: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

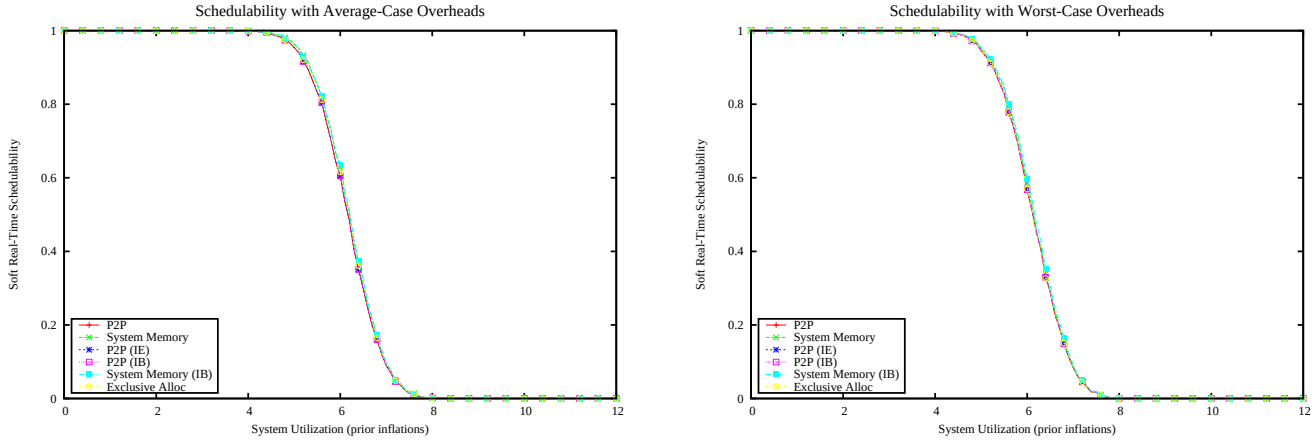

Figure 7327: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

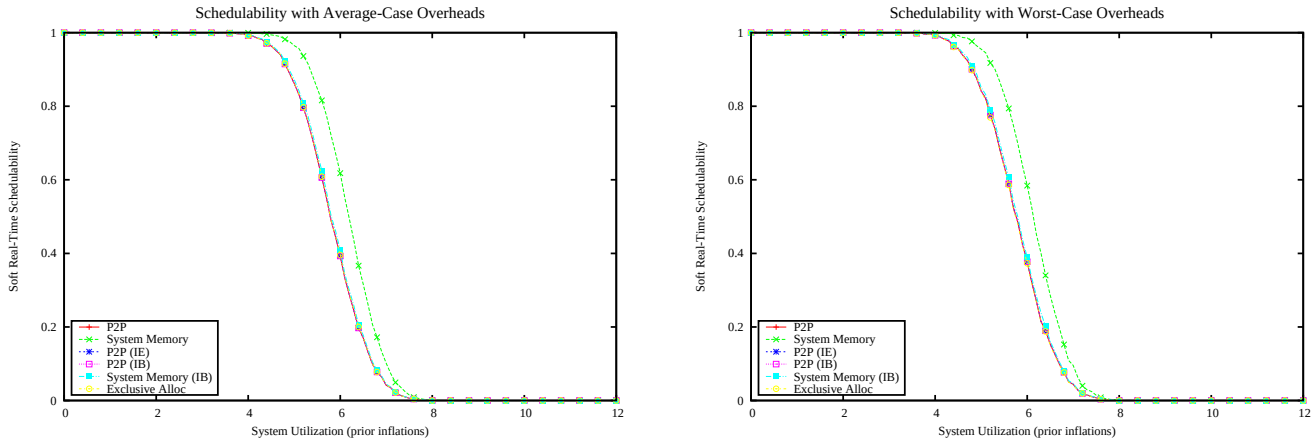

Figure 7328: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

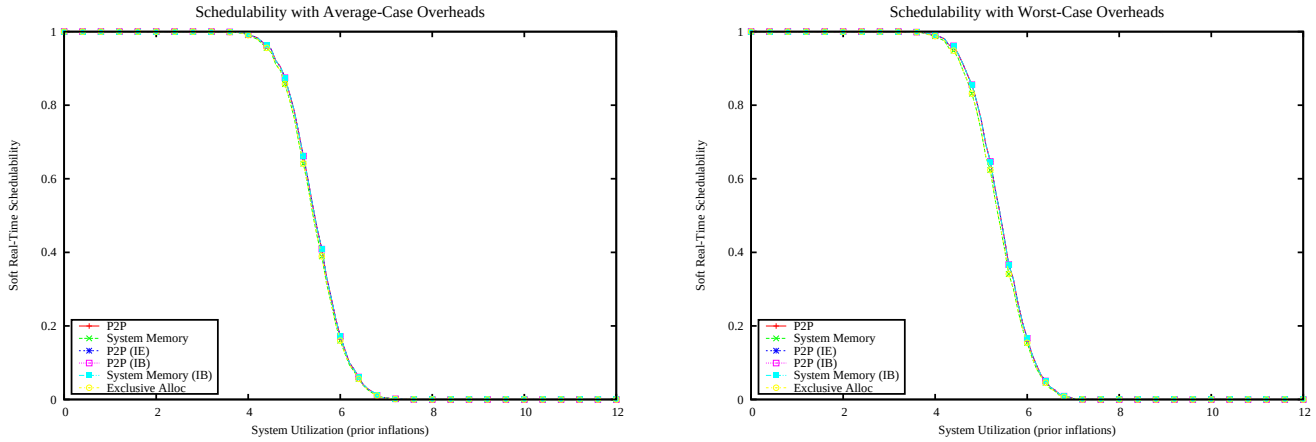

Figure 7329: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

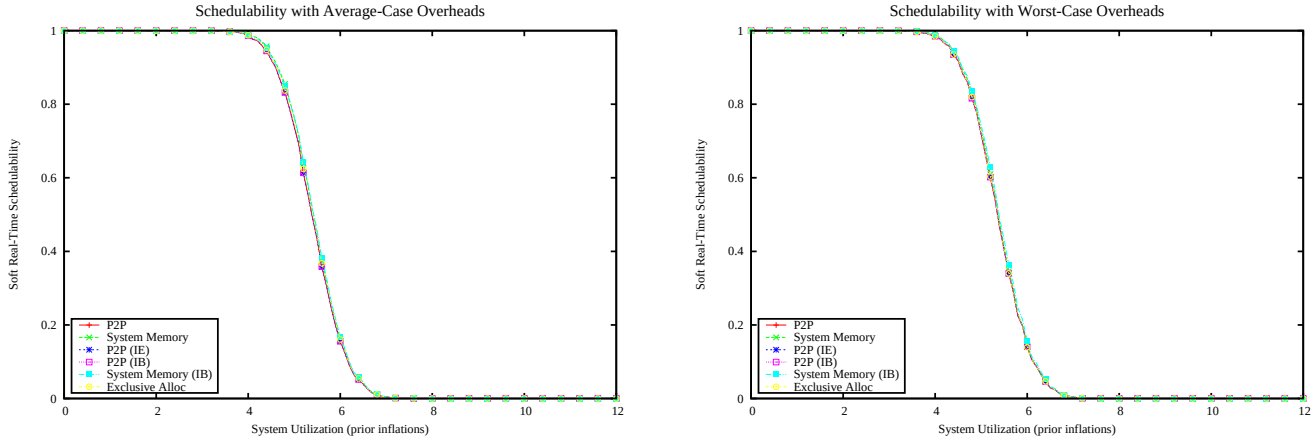

Figure 7330: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

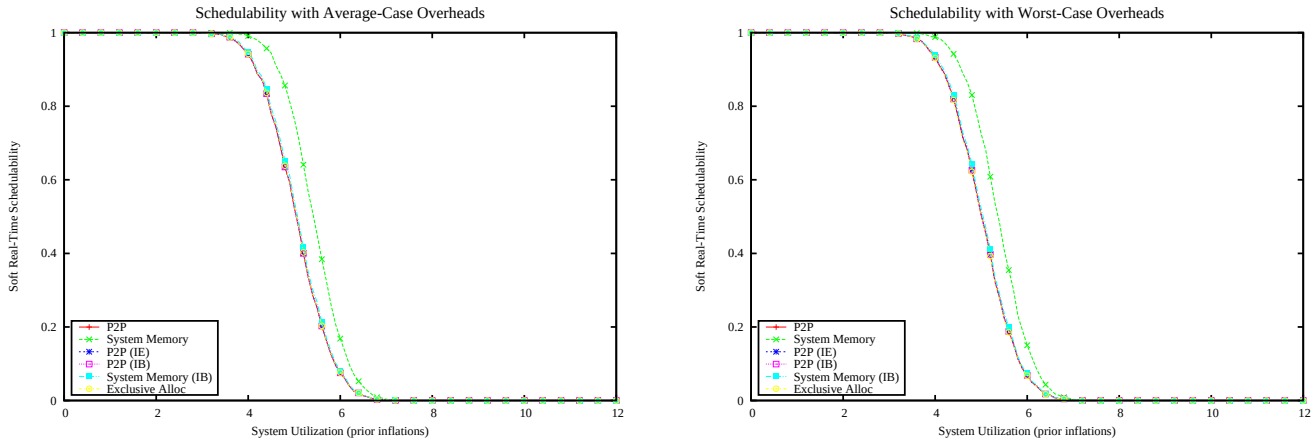

Figure 7331: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

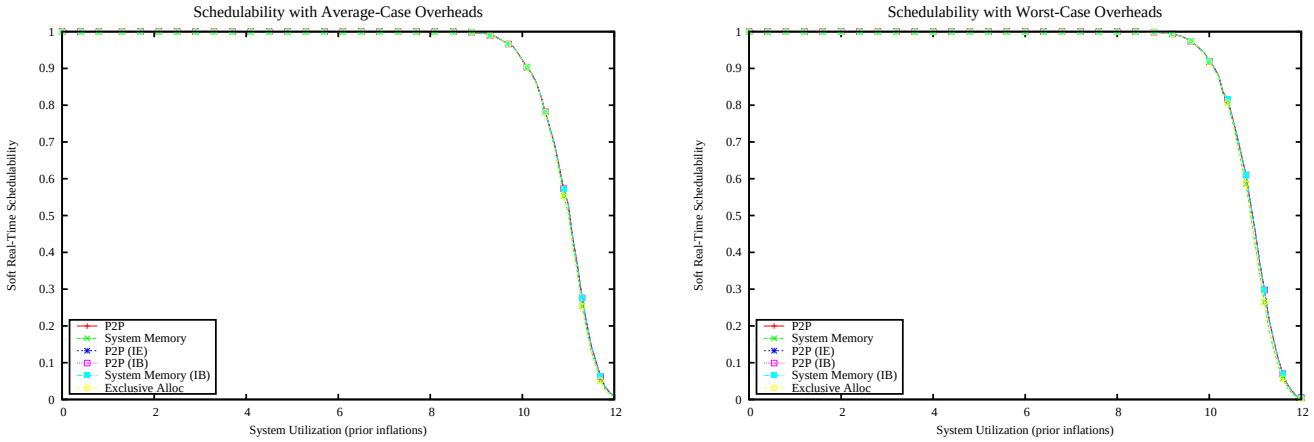

Figure 7332: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

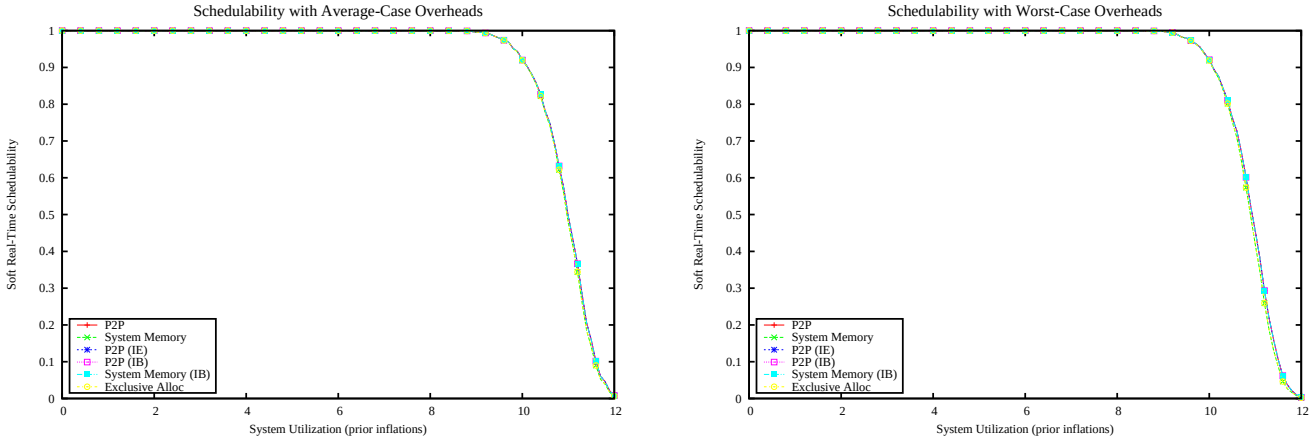

Figure 7333: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

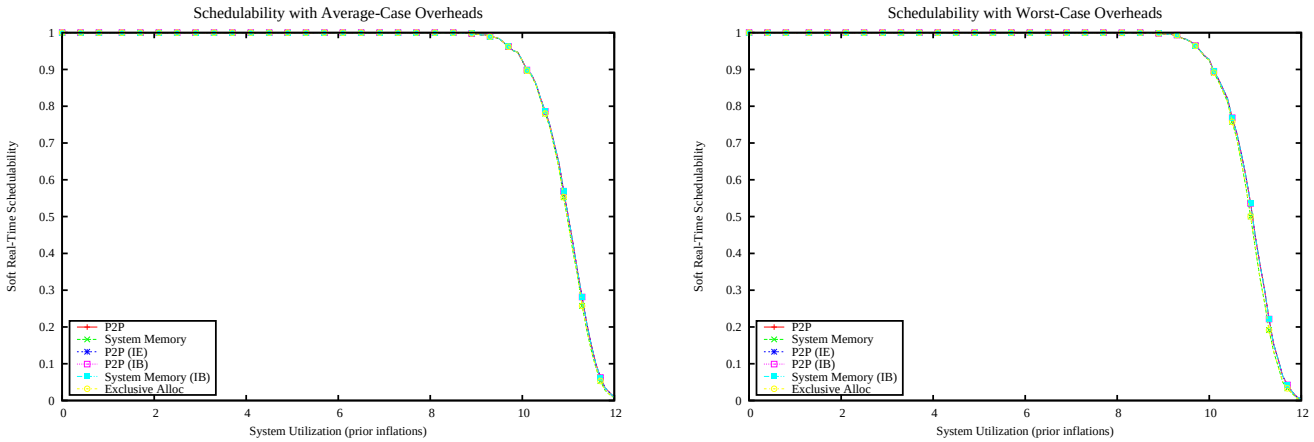

Figure 7334: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

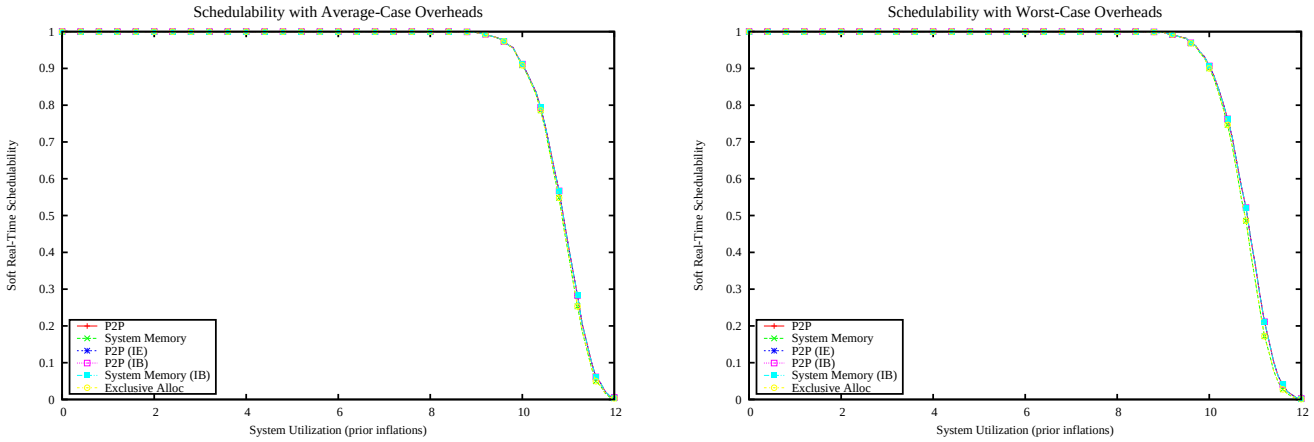

Figure 7335: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

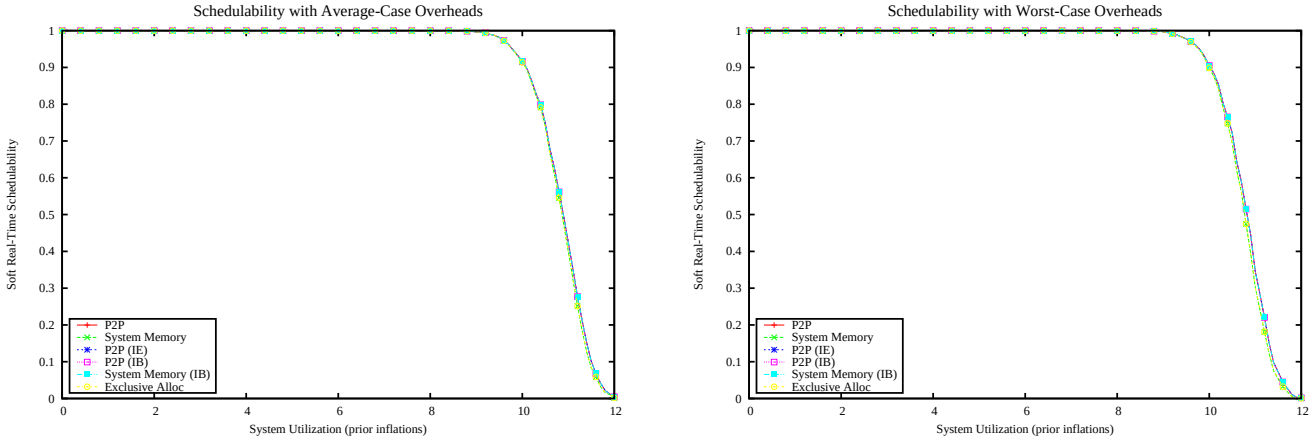

Figure 7336: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

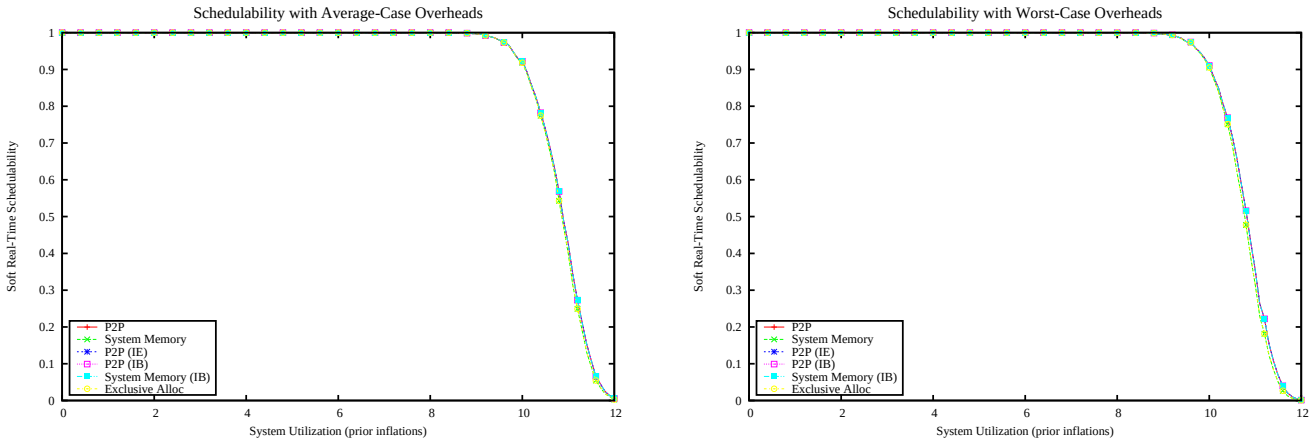

Figure 7337: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

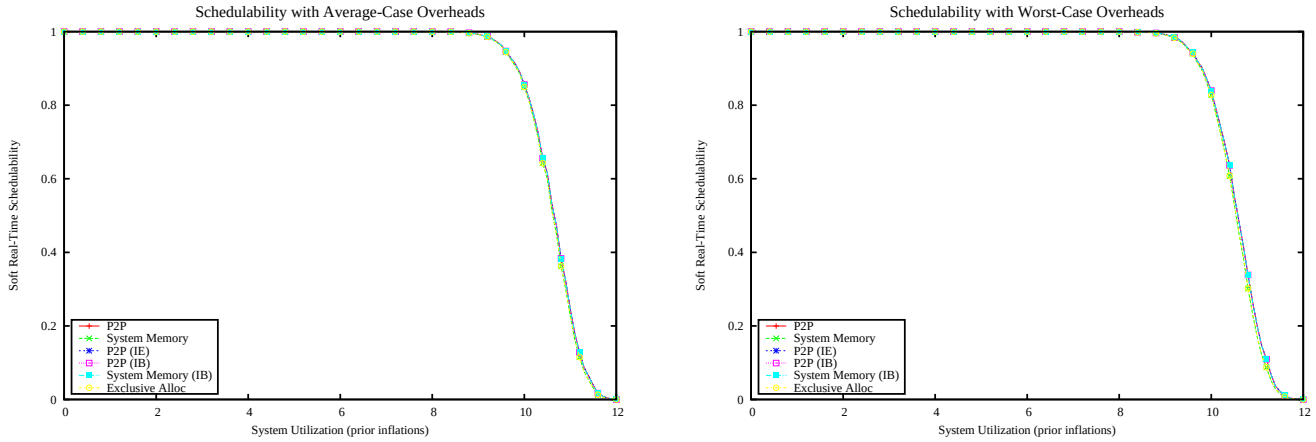

Figure 7338: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

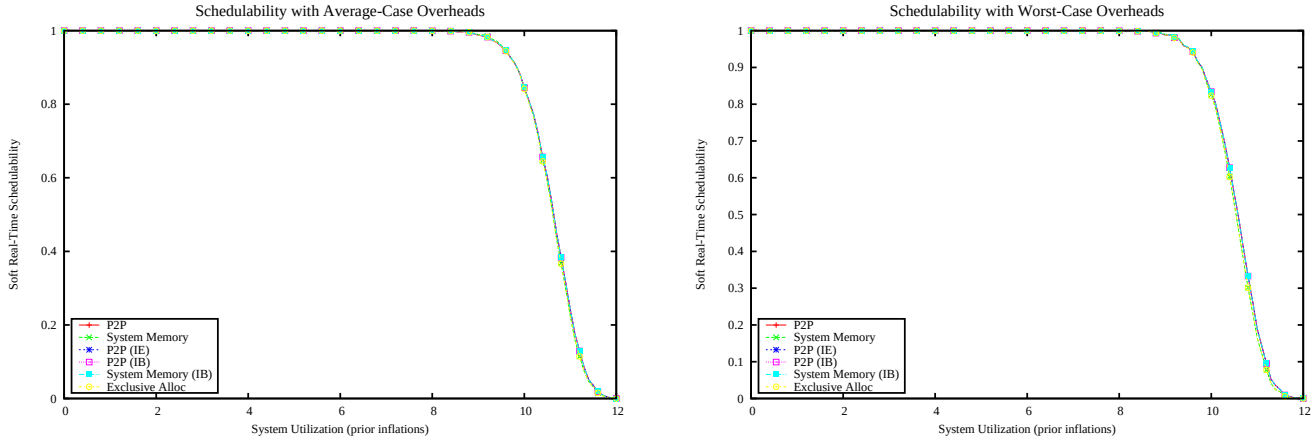

Figure 7339: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

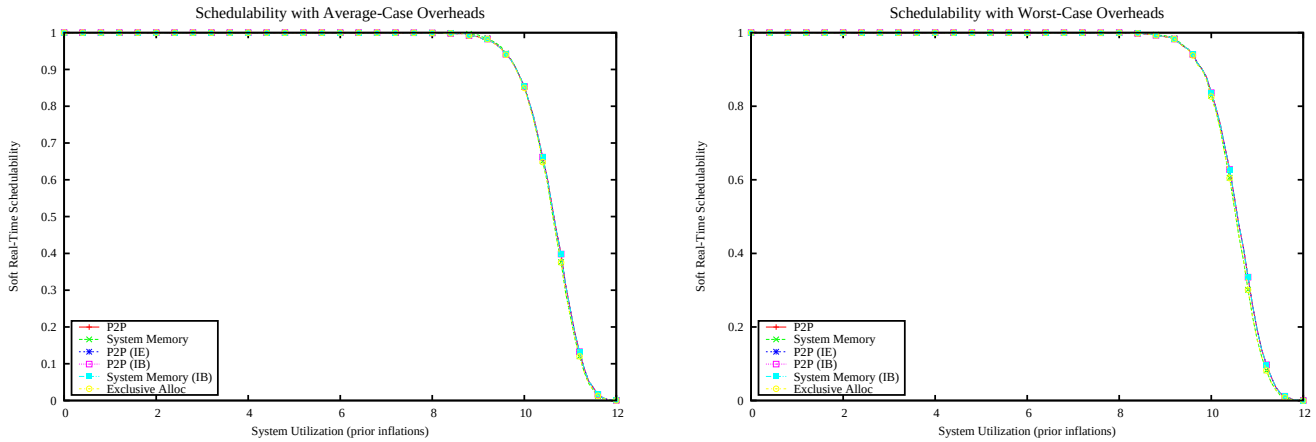

Figure 7340: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

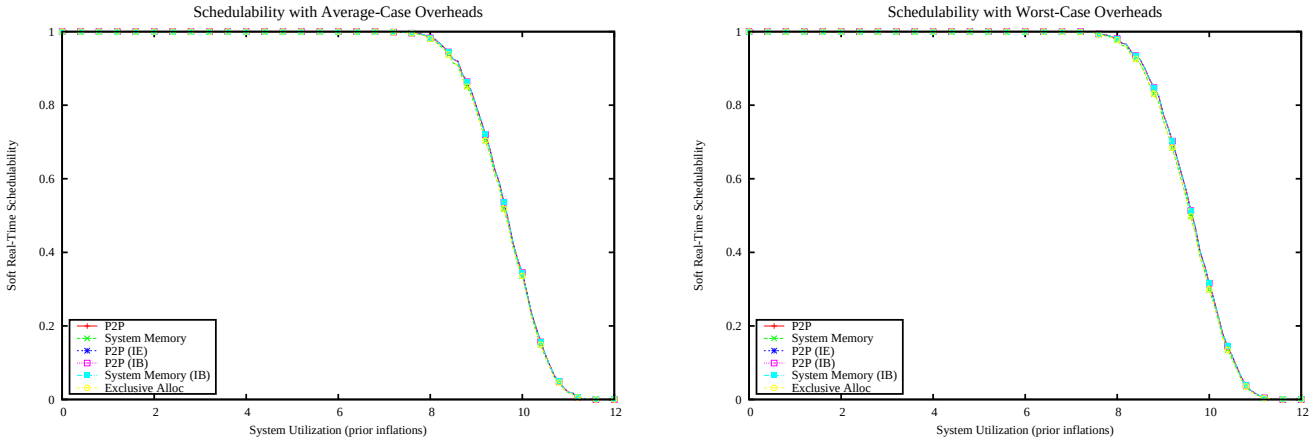

Figure 7341: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

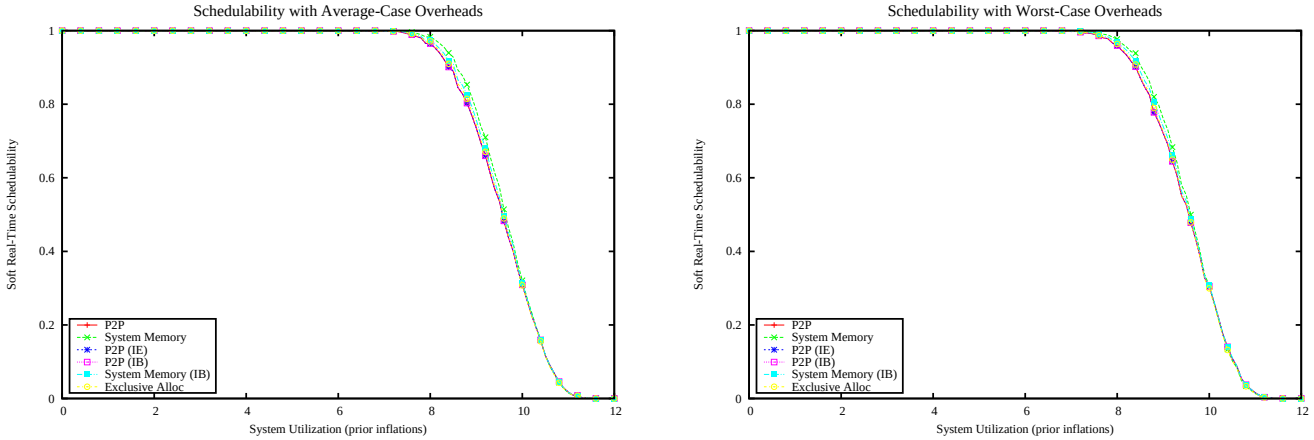

Figure 7342: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

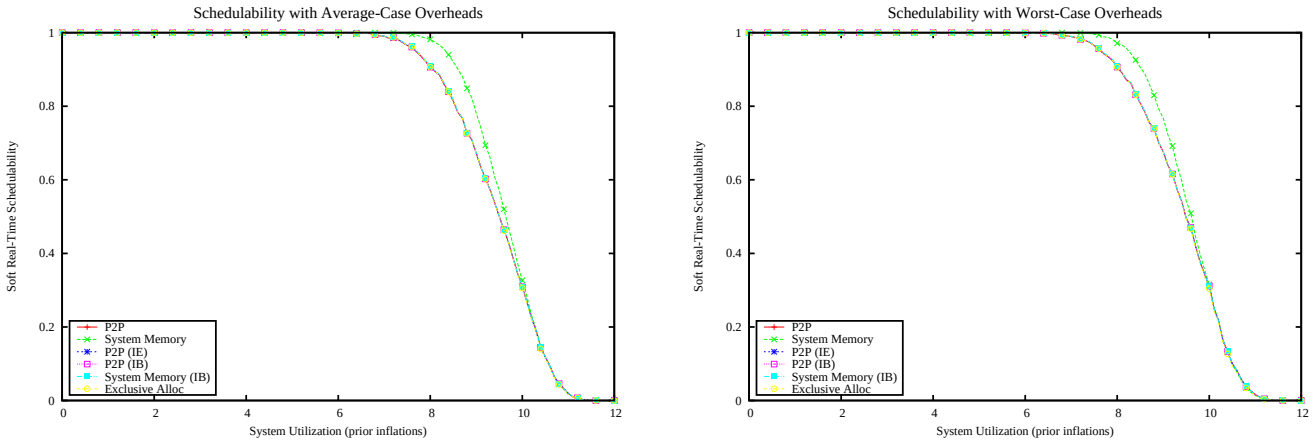

Figure 7343: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

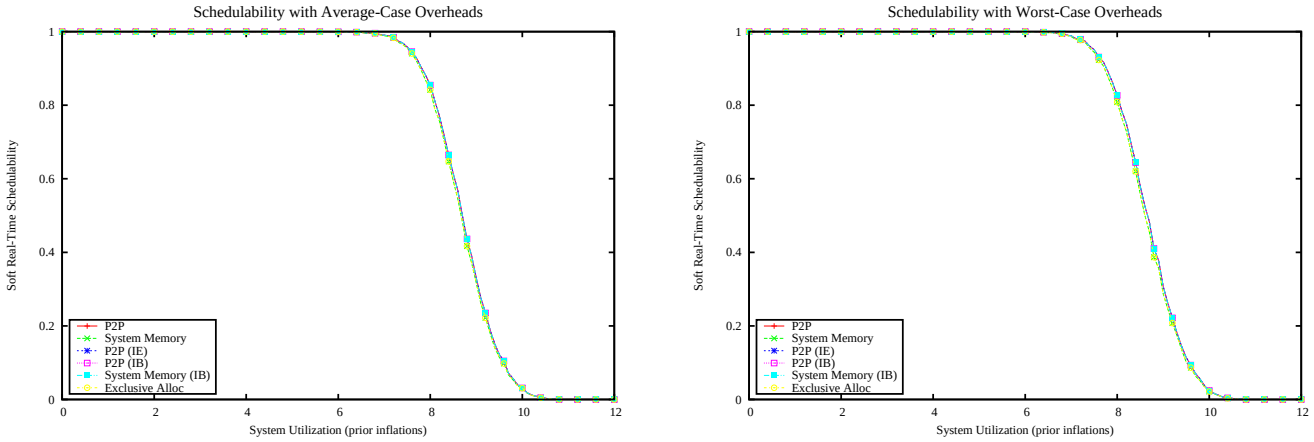

Figure 7344: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

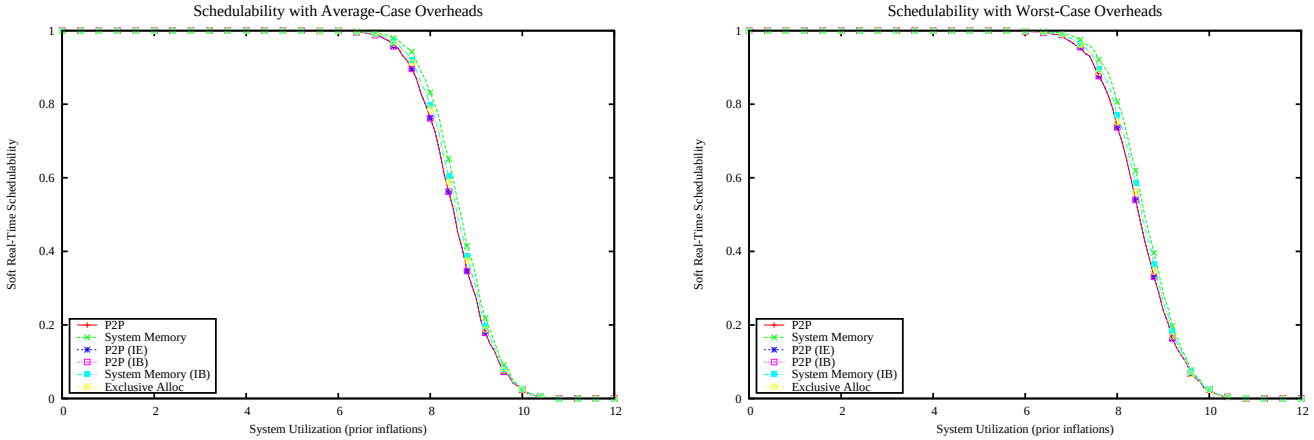

Figure 7345: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

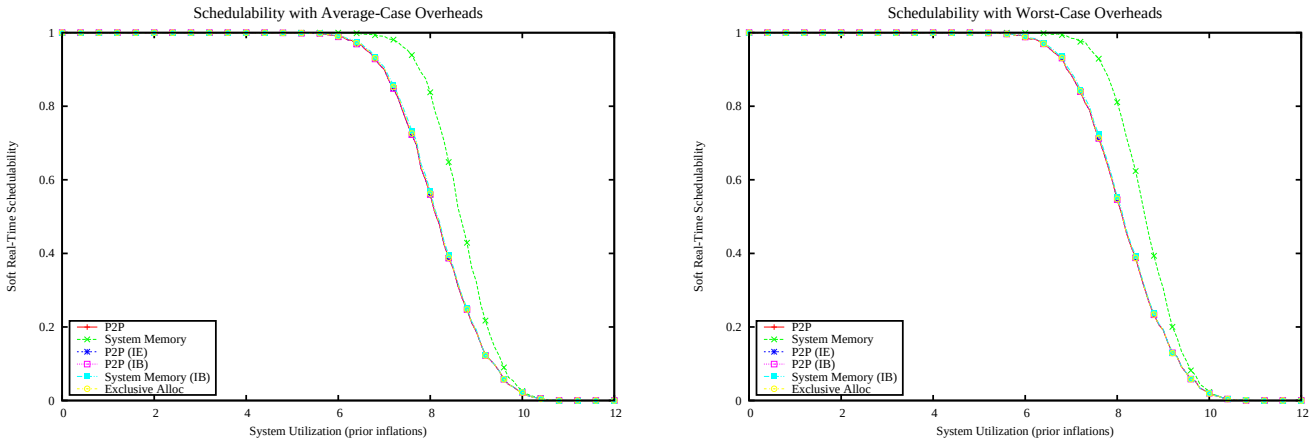

Figure 7346: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

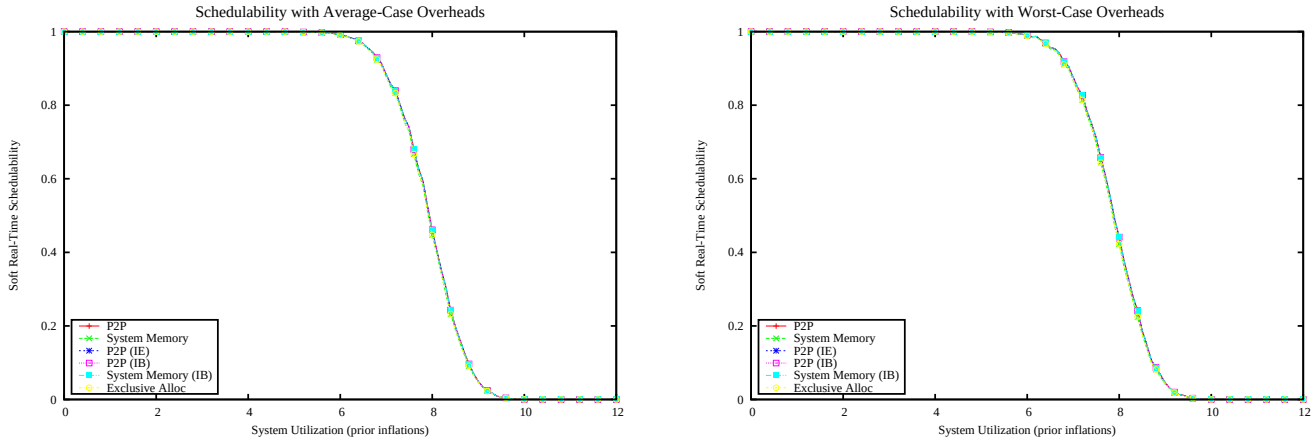

Figure 7347: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

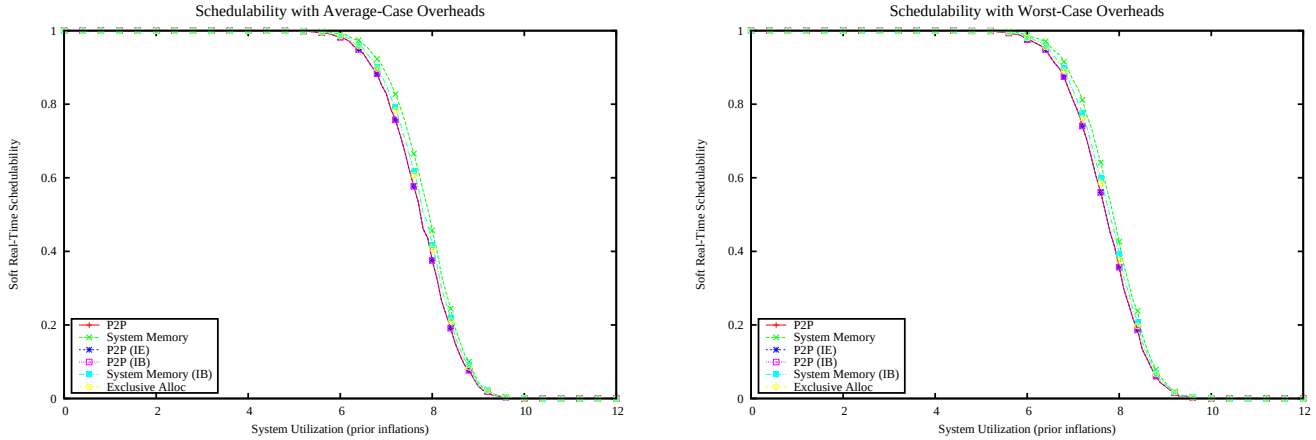

Figure 7348: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

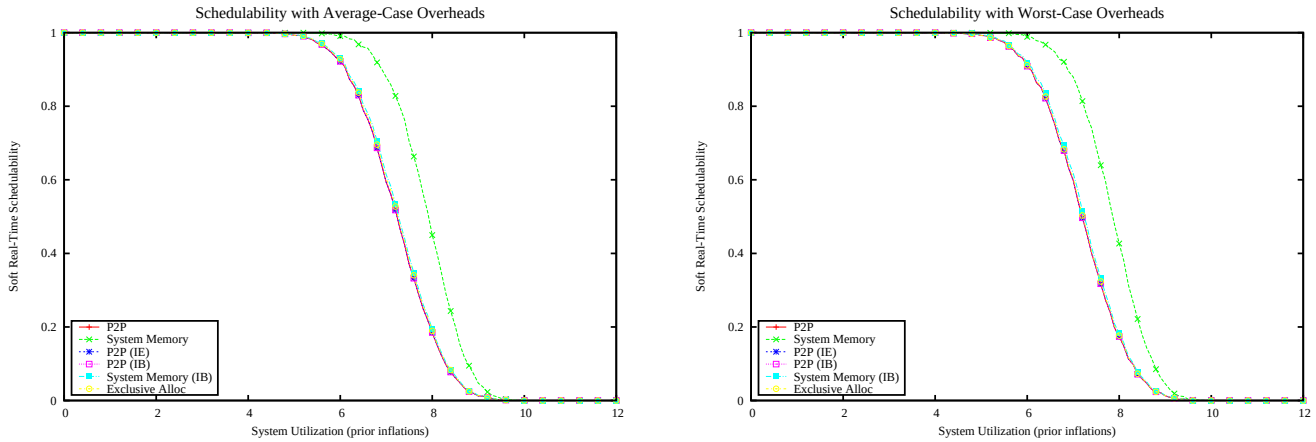

Figure 7349: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

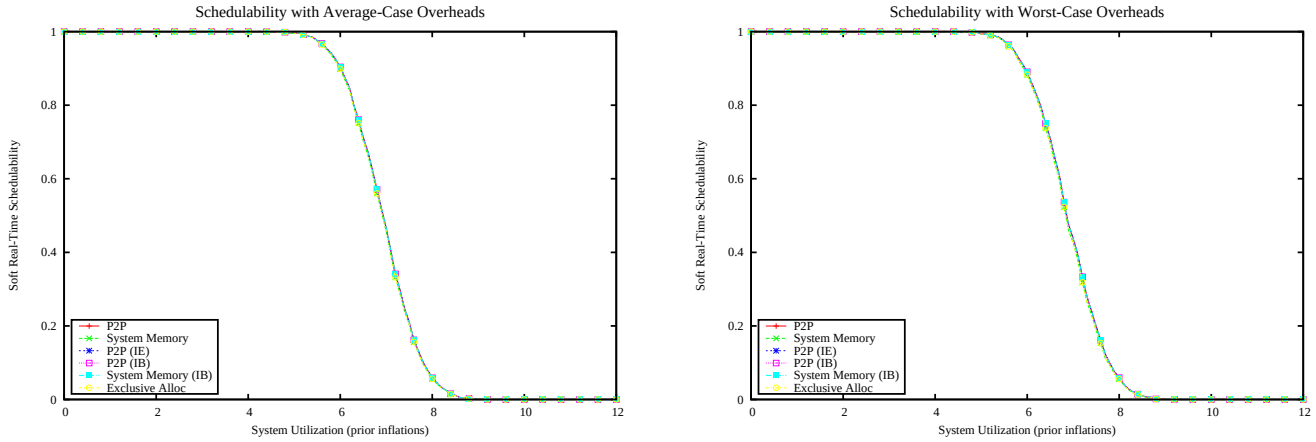

Figure 7350: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

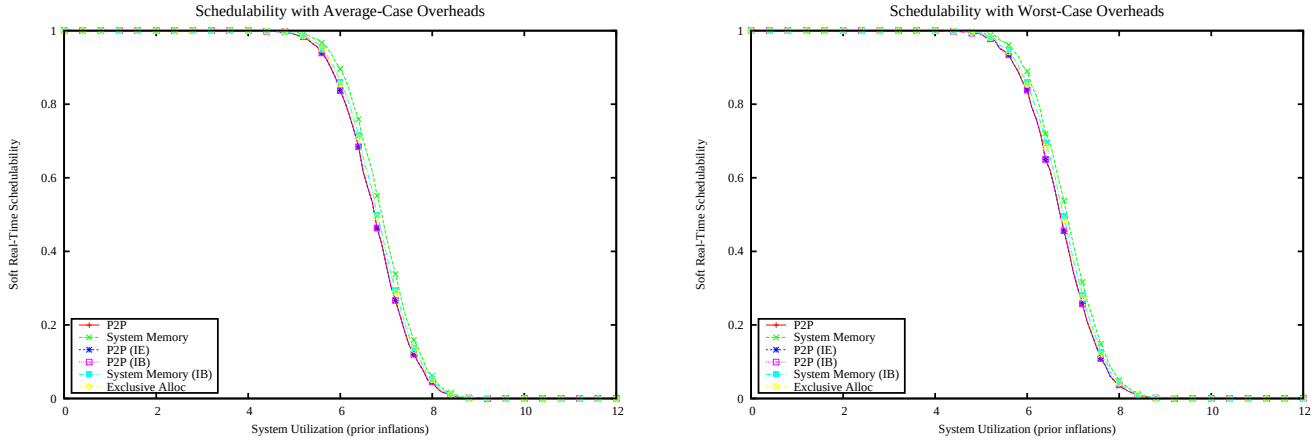

Figure 7351: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

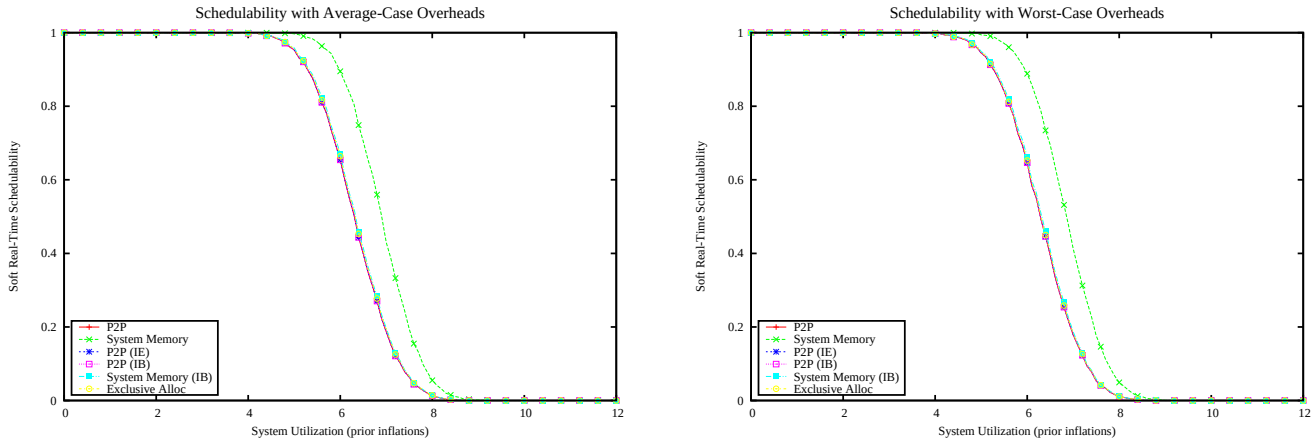

Figure 7352: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

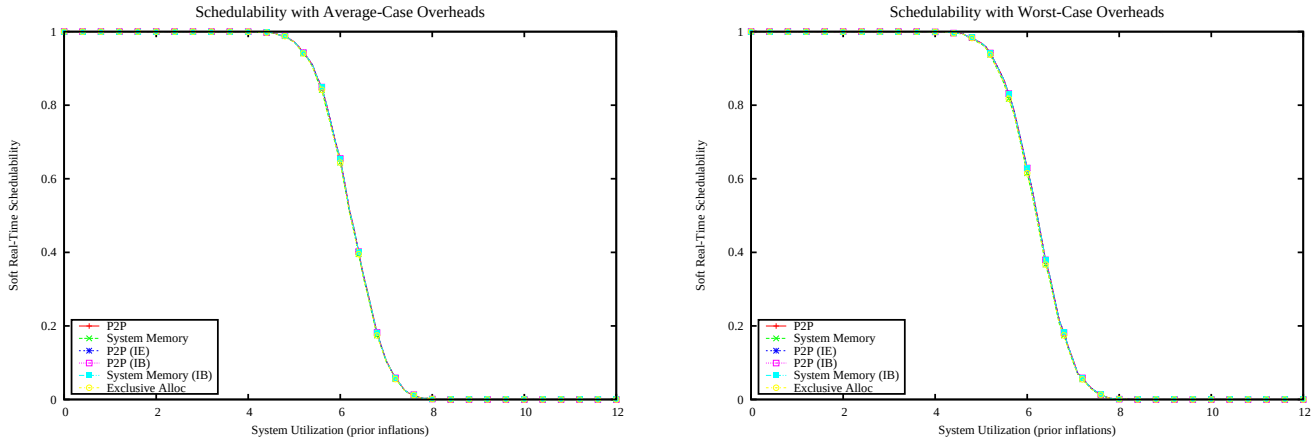

Figure 7353: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

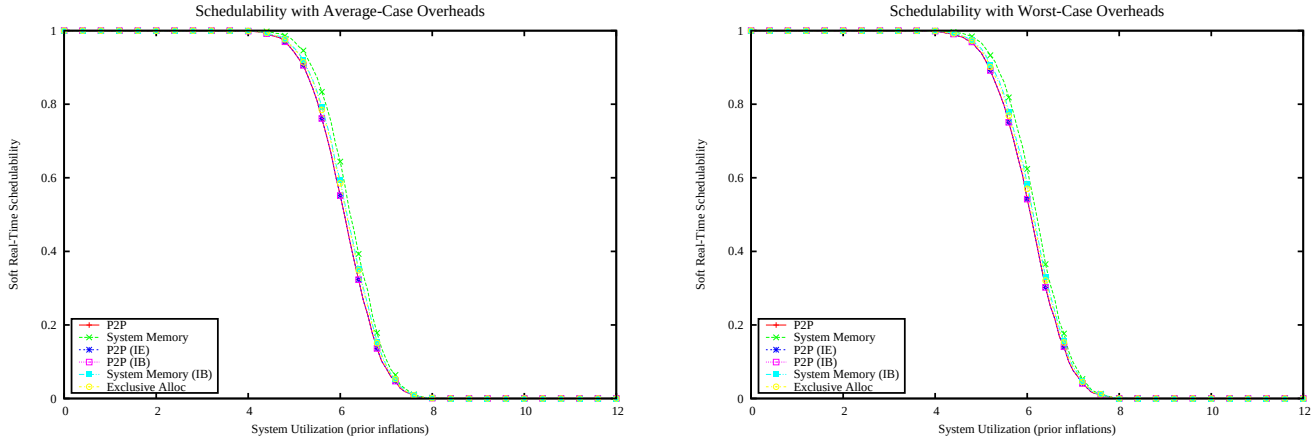

Figure 7354: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

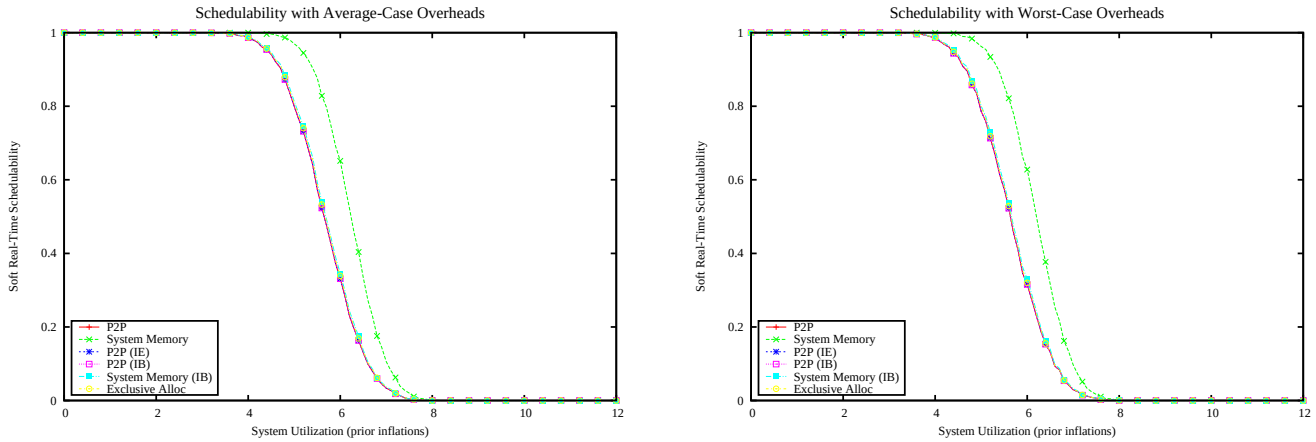

Figure 7355: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

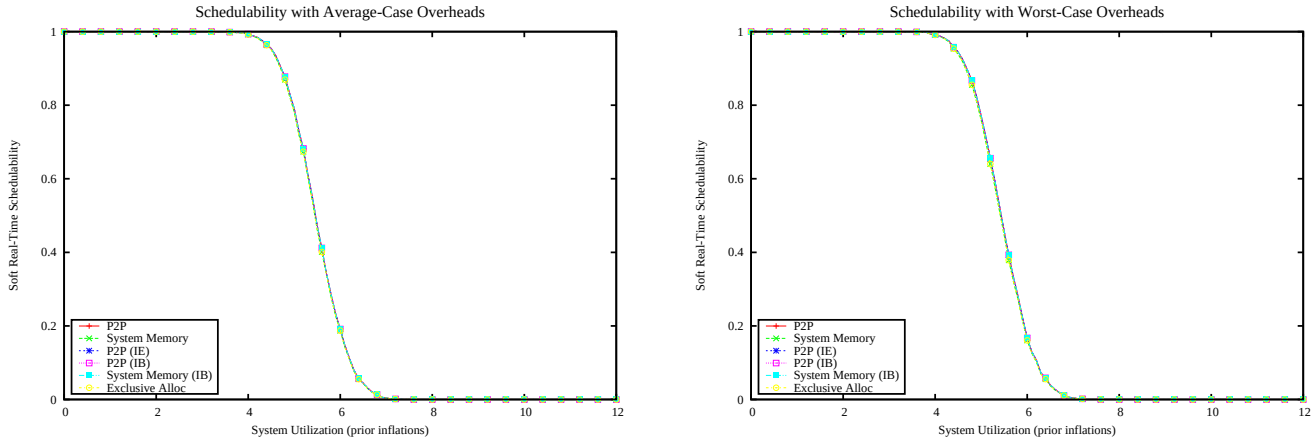

Figure 7356: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

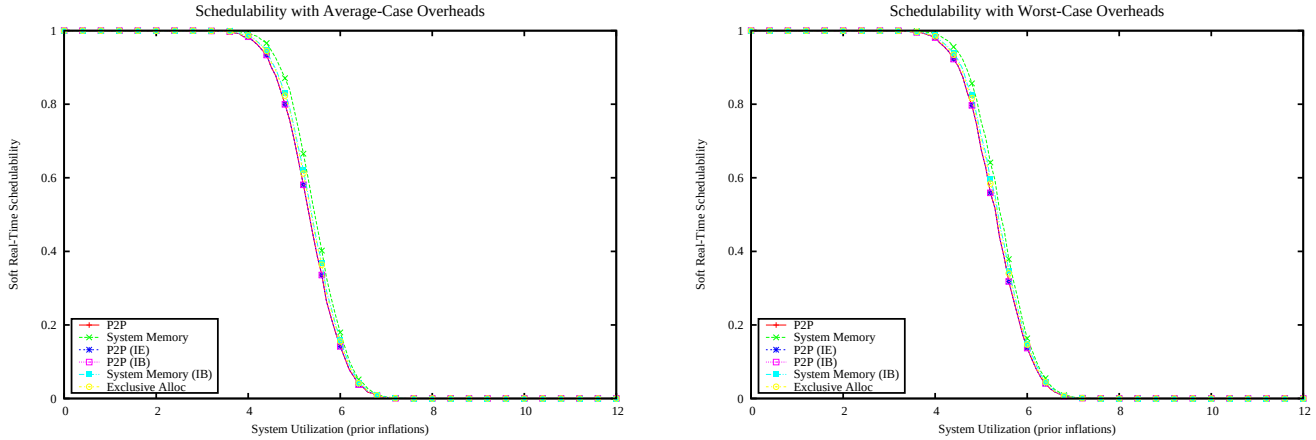

Figure 7357: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

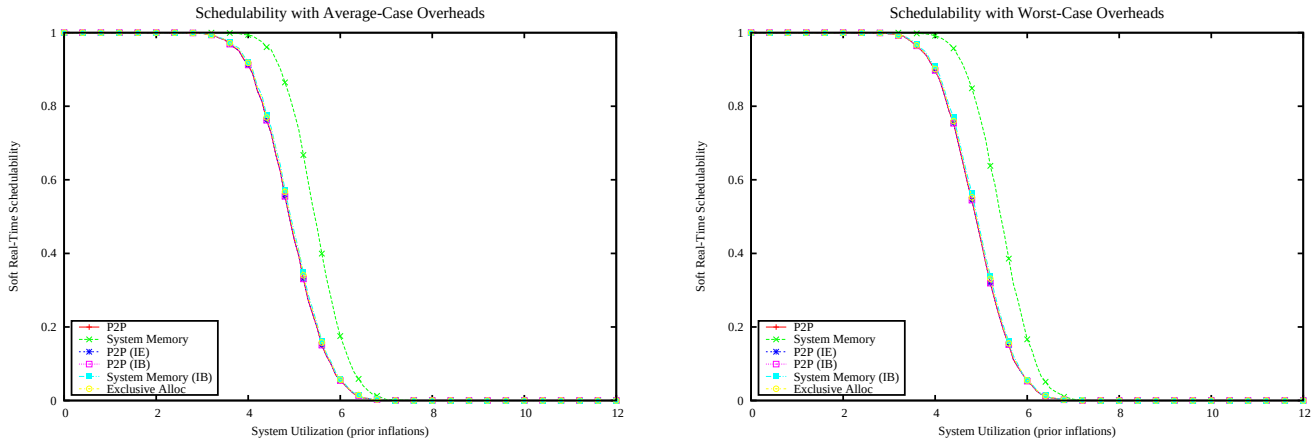

Figure 7358: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

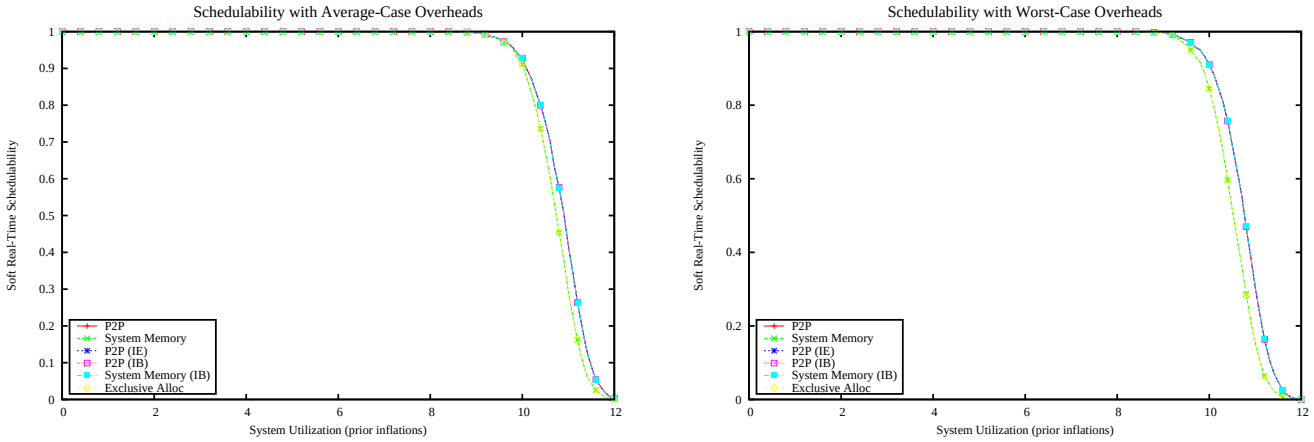

Figure 7359: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

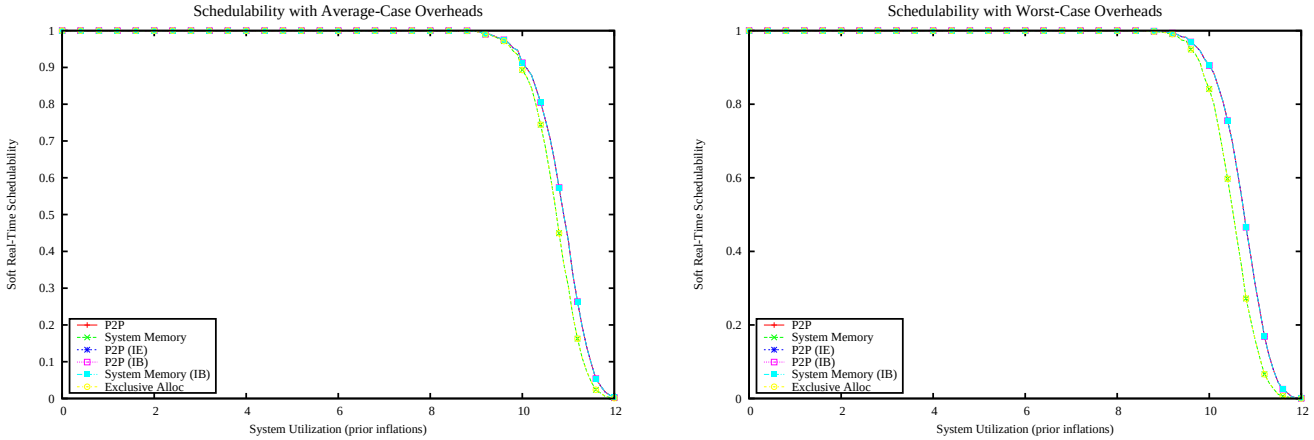

Figure 7360: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

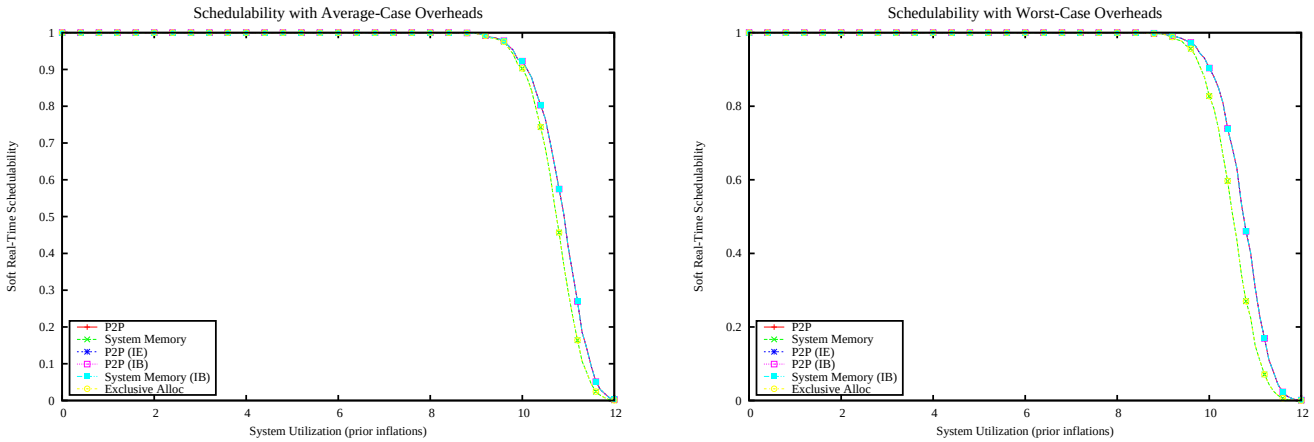

Figure 7361: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

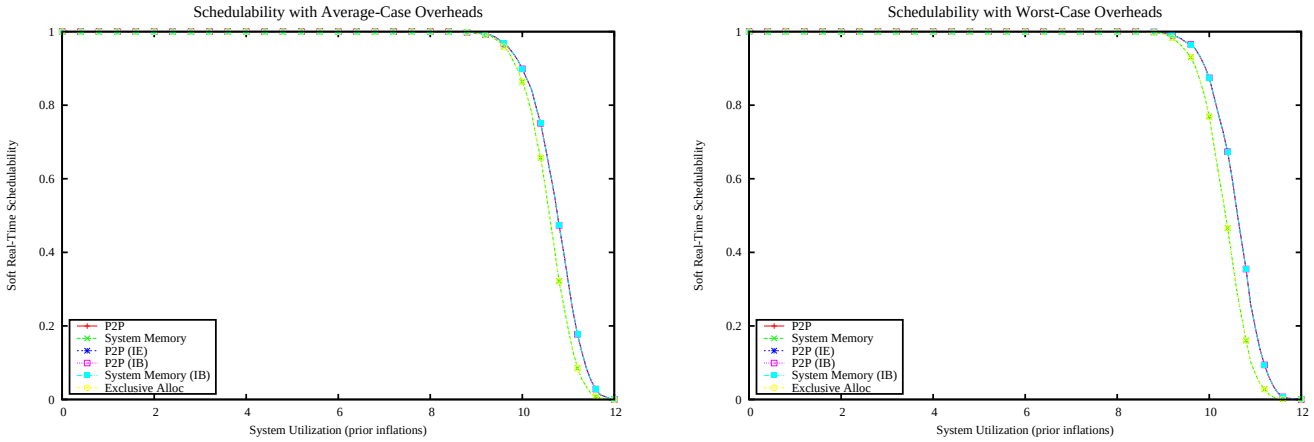

Figure 7362: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

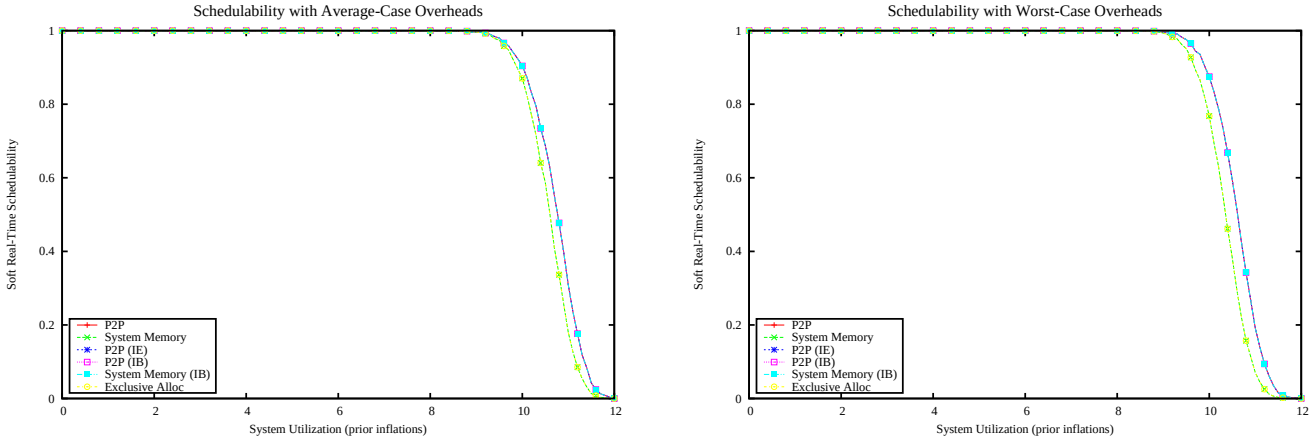

Figure 7363: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

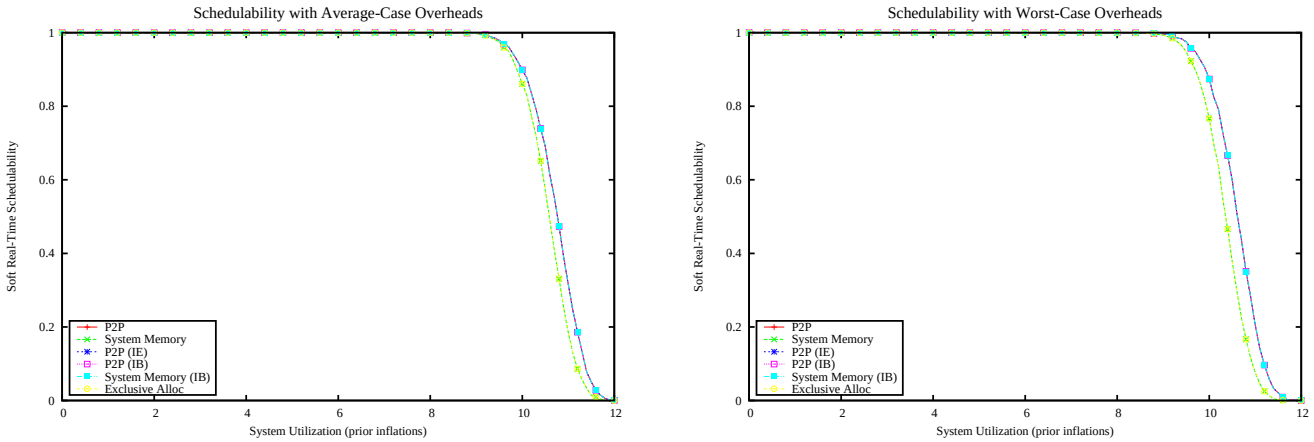

Figure 7364: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

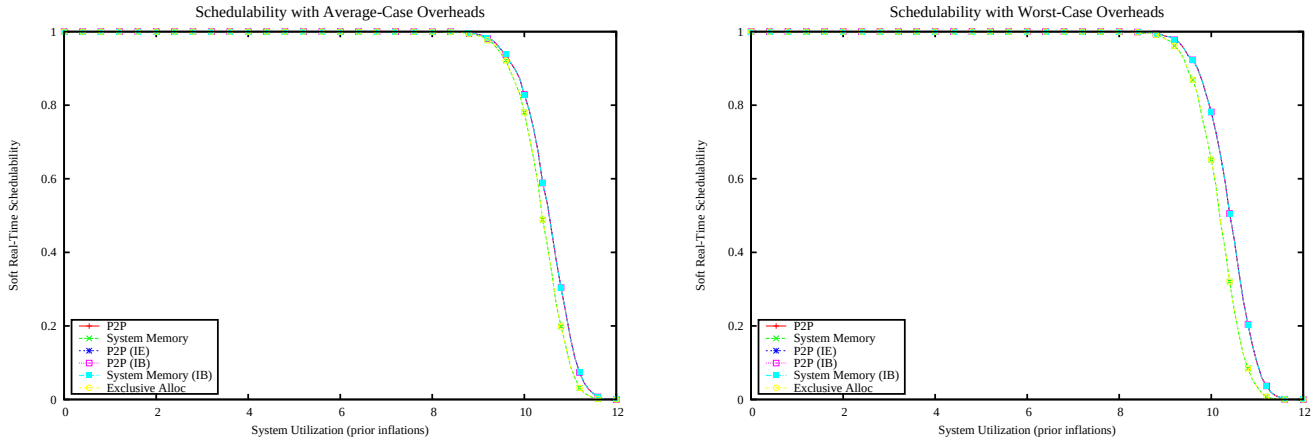

Figure 7365: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

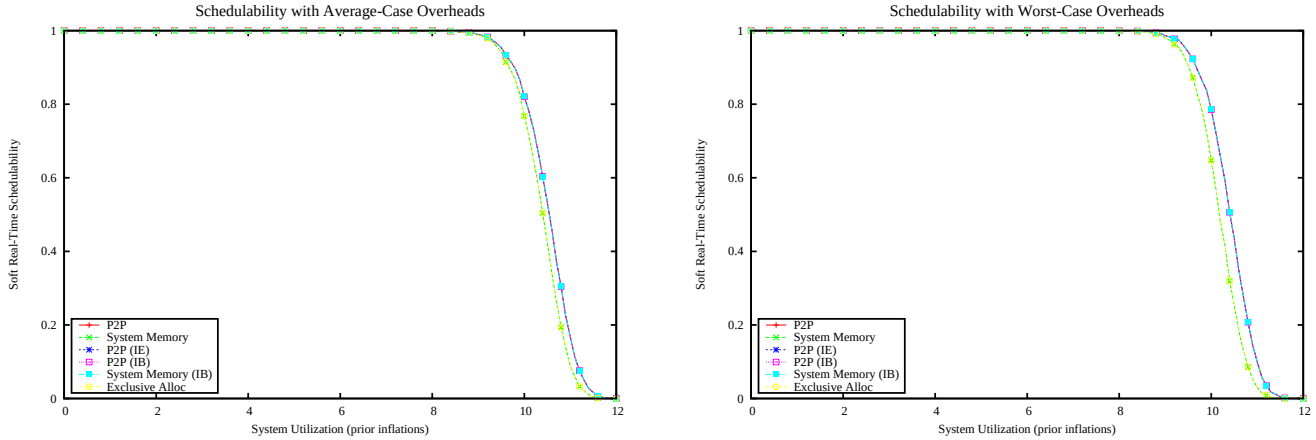

Figure 7366: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

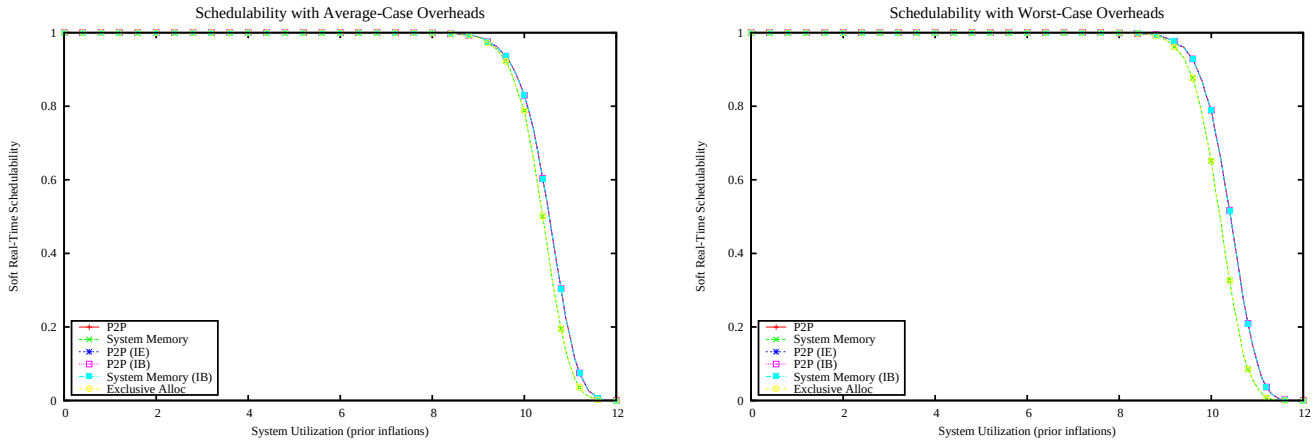

Figure 7367: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

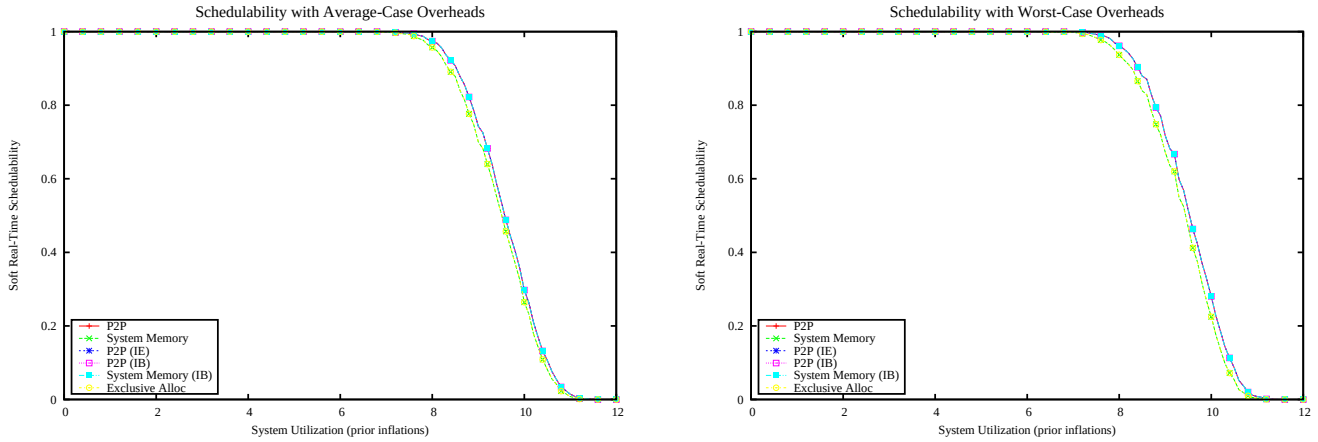

Figure 7368: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

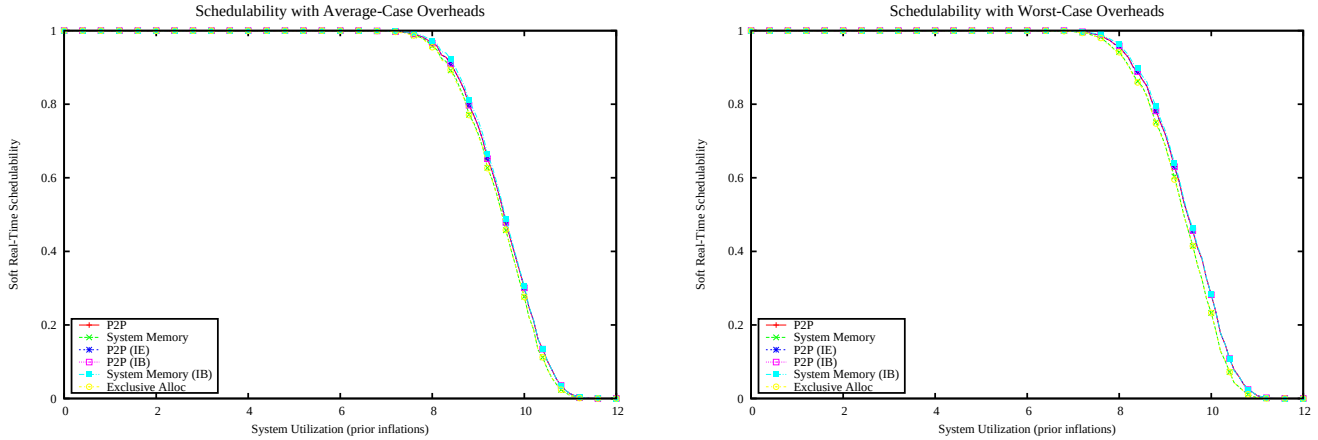

Figure 7369: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

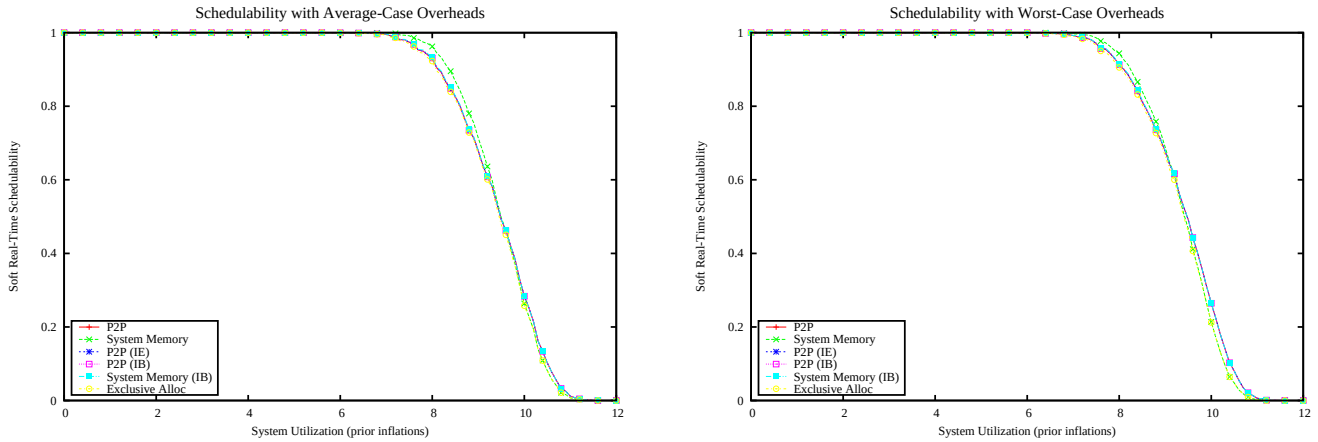

Figure 7370: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

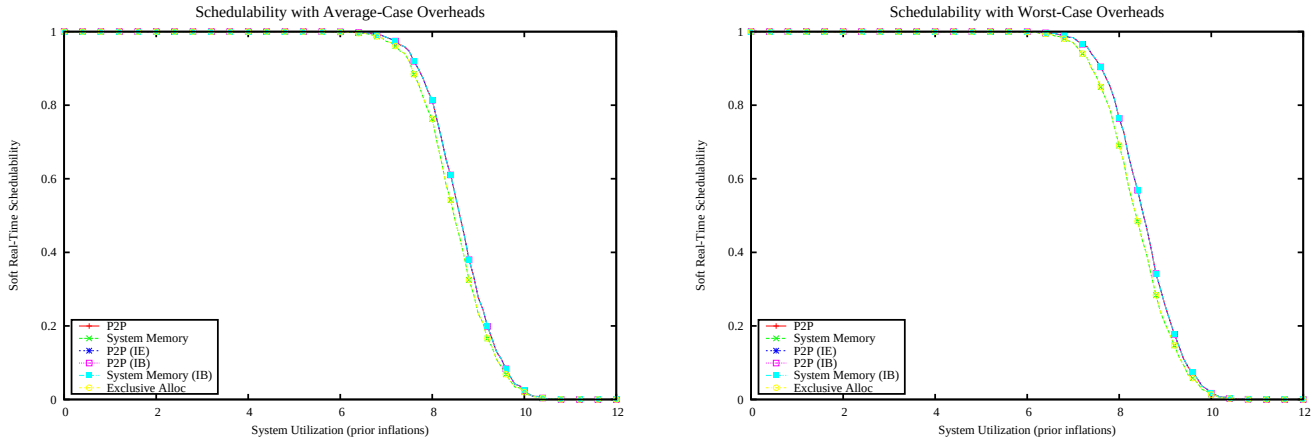

Figure 7371: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

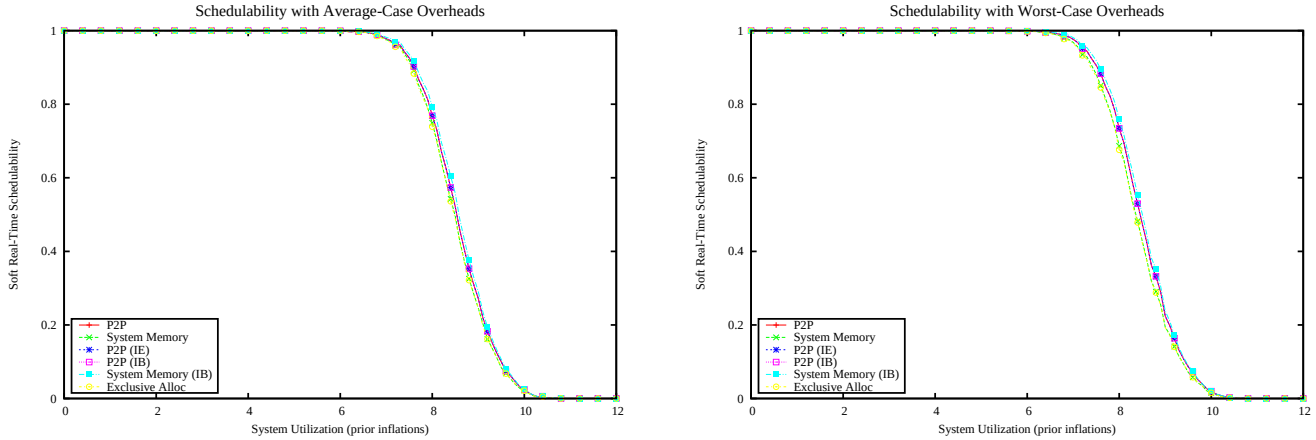

Figure 7372: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

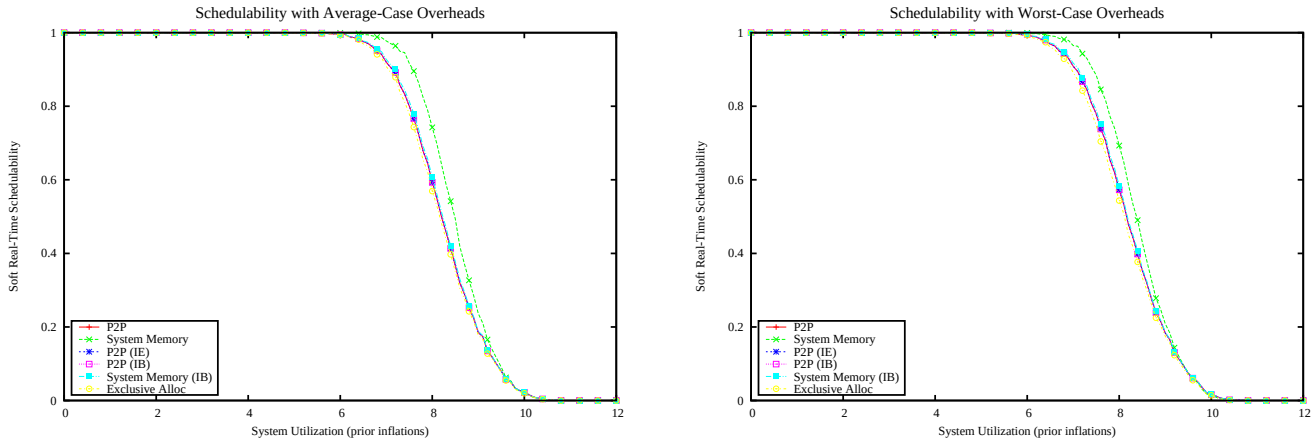

Figure 7373: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

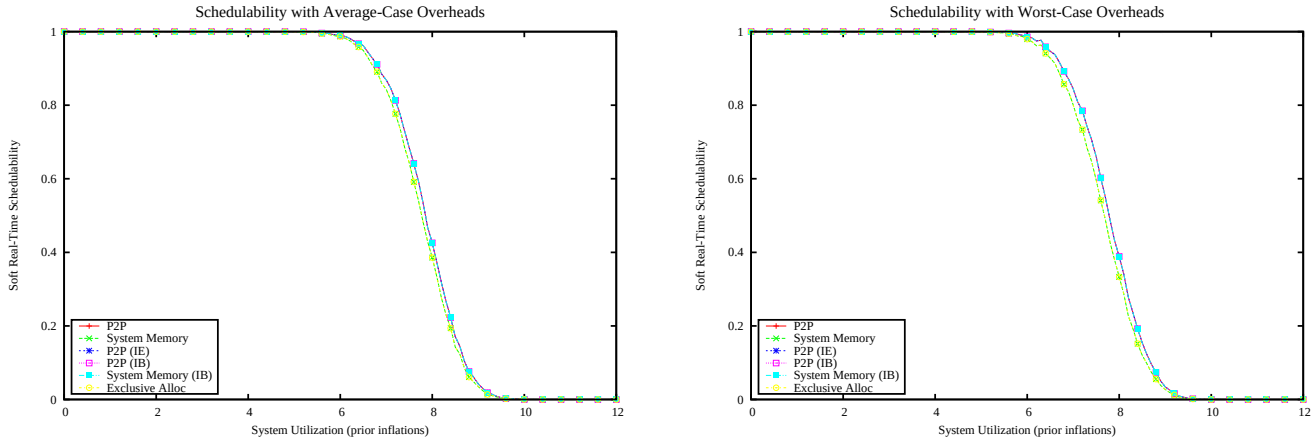

Figure 7374: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

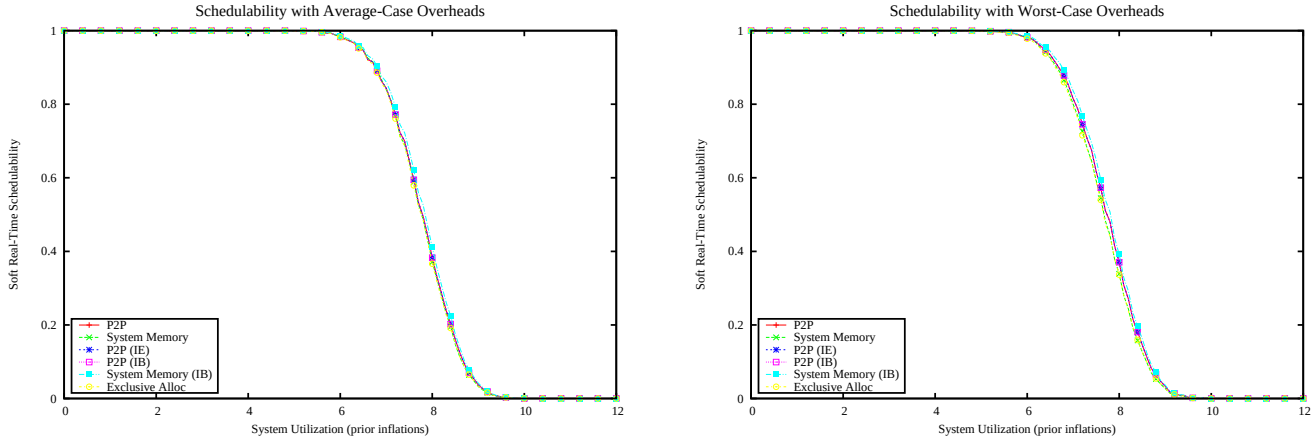

Figure 7375: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

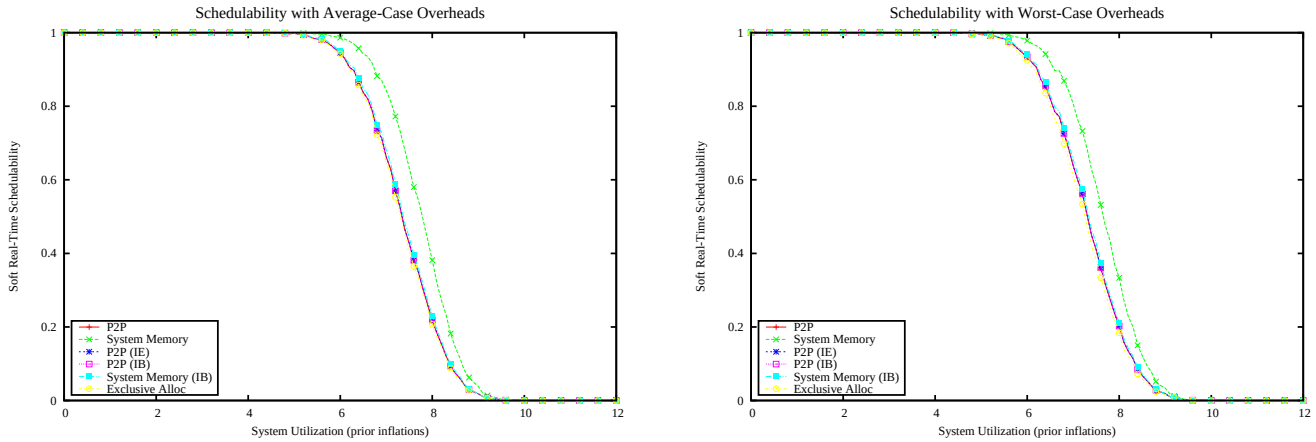

Figure 7376: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

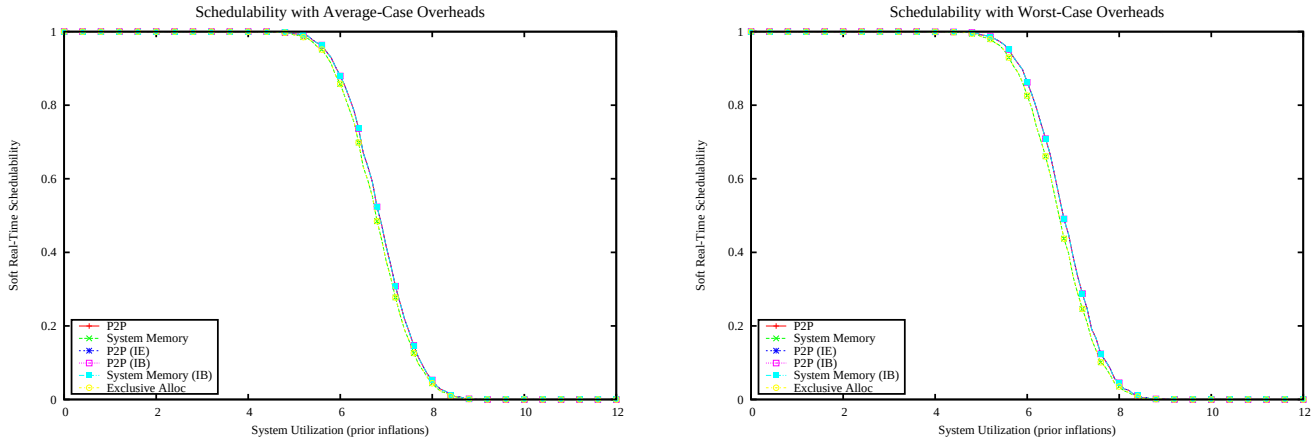

Figure 7377: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

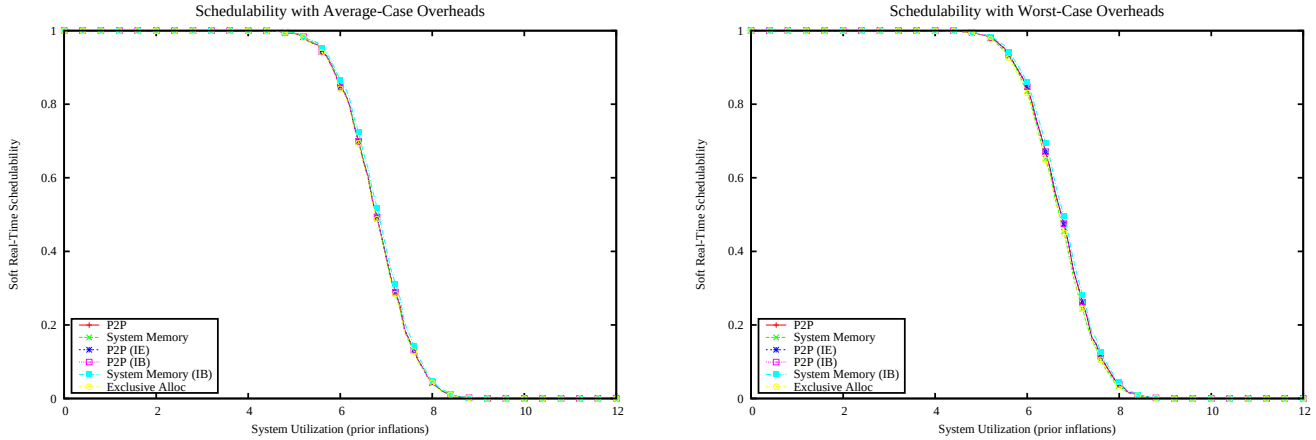

Figure 7378: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

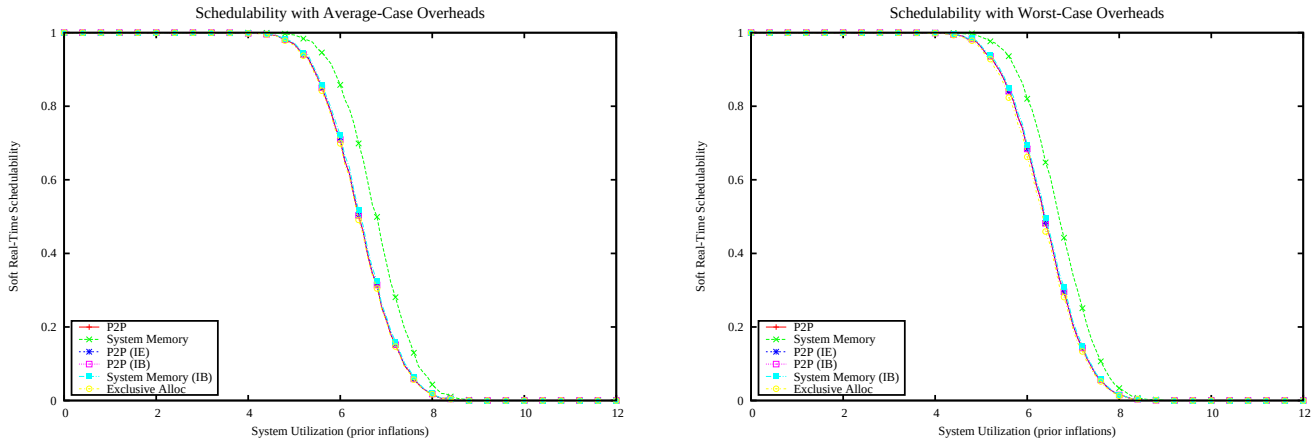

Figure 7379: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

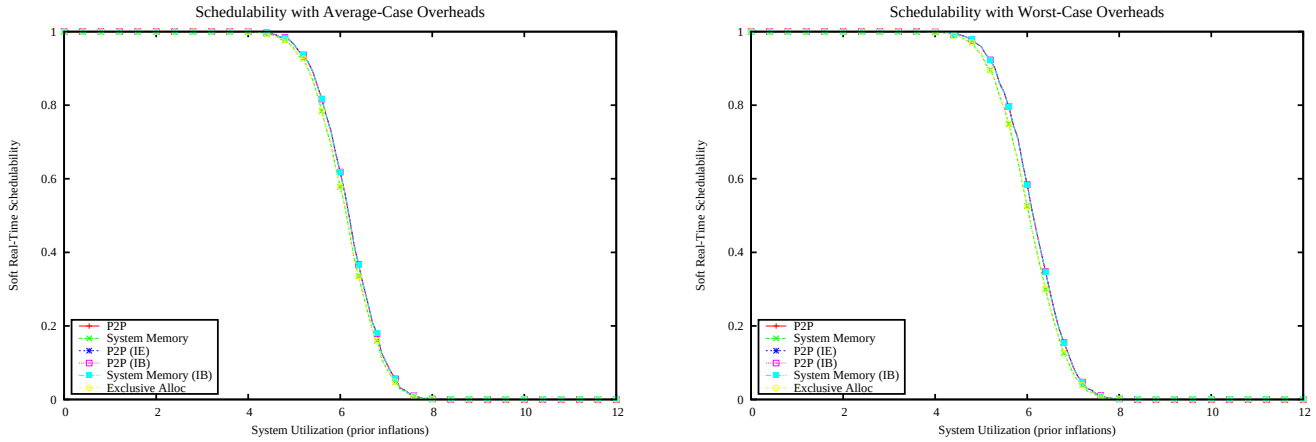

Figure 7380: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

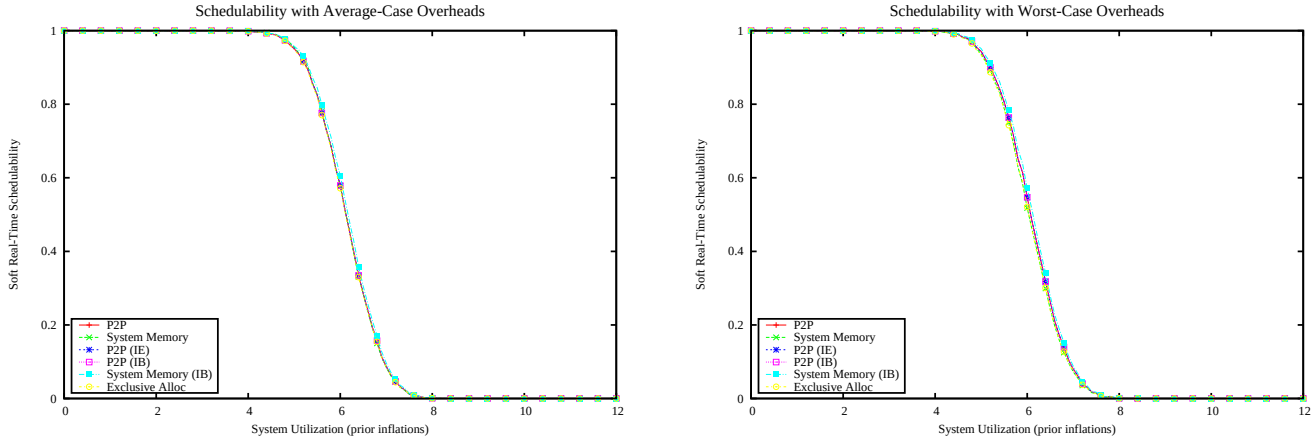

Figure 7381: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

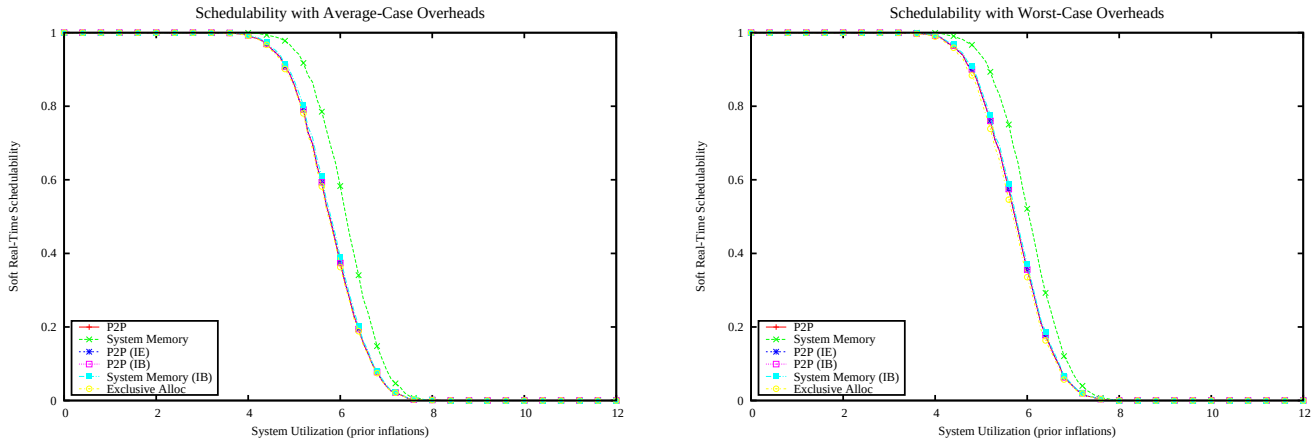

Figure 7382: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

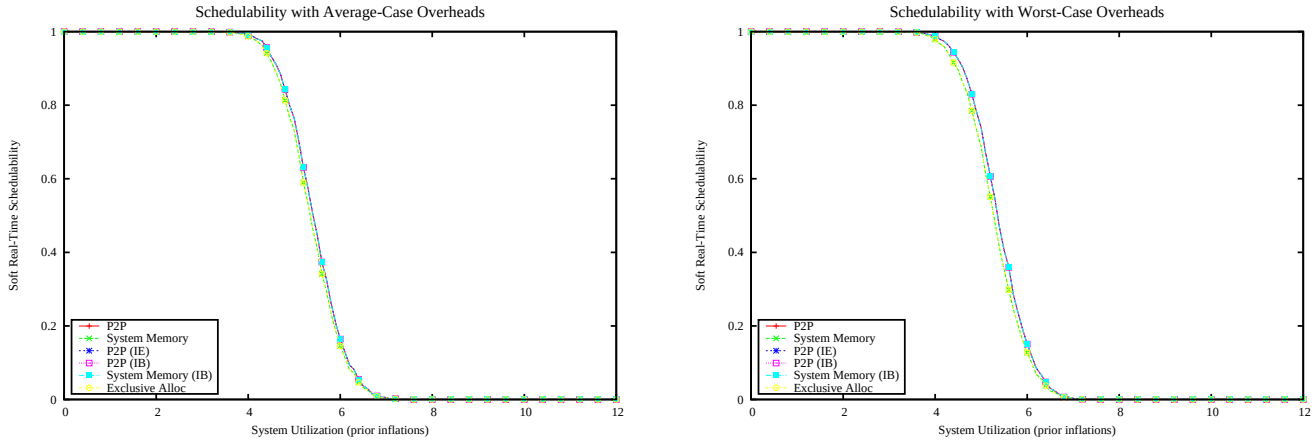

Figure 7383: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

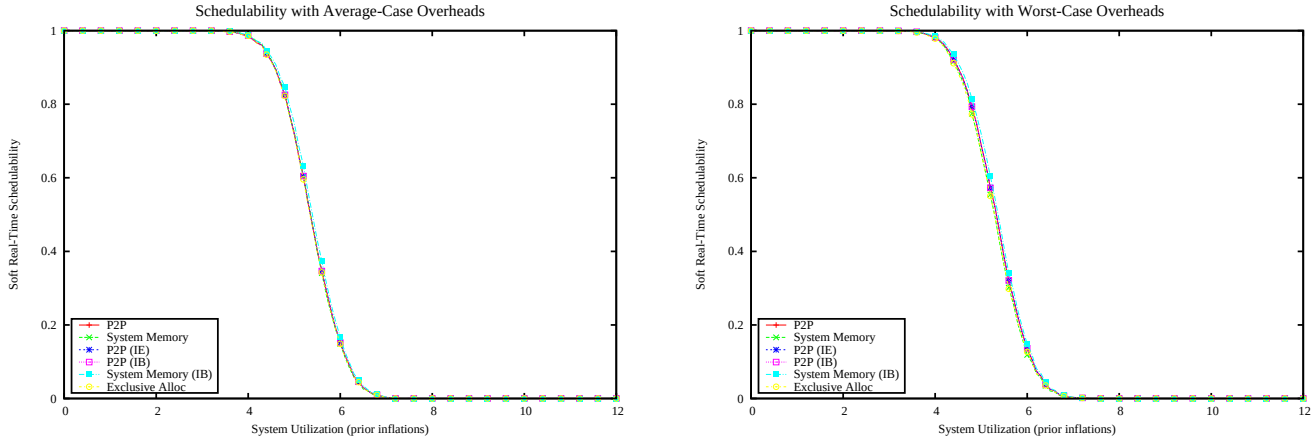

Figure 7384: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

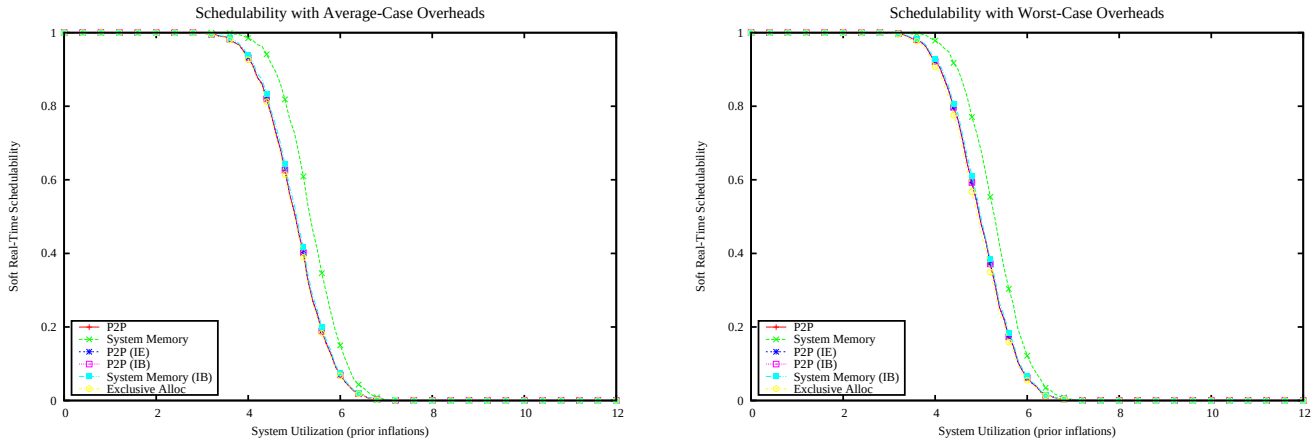

Figure 7385: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

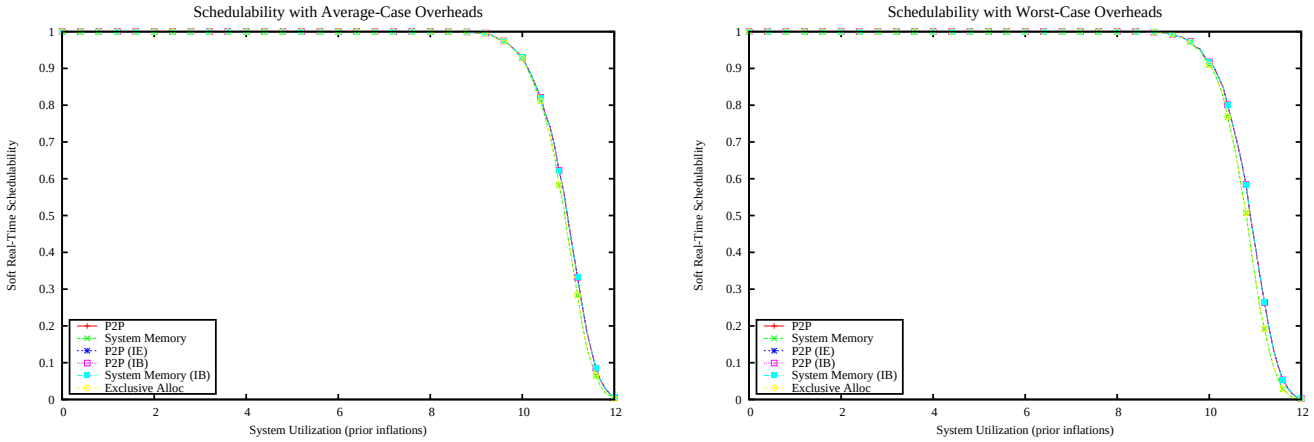

Figure 7386: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

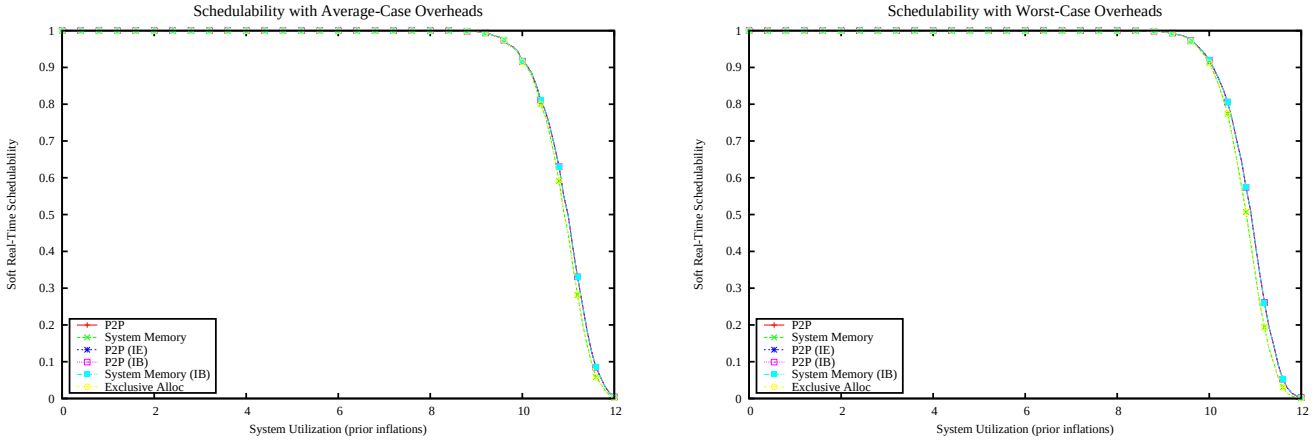

Figure 7387: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

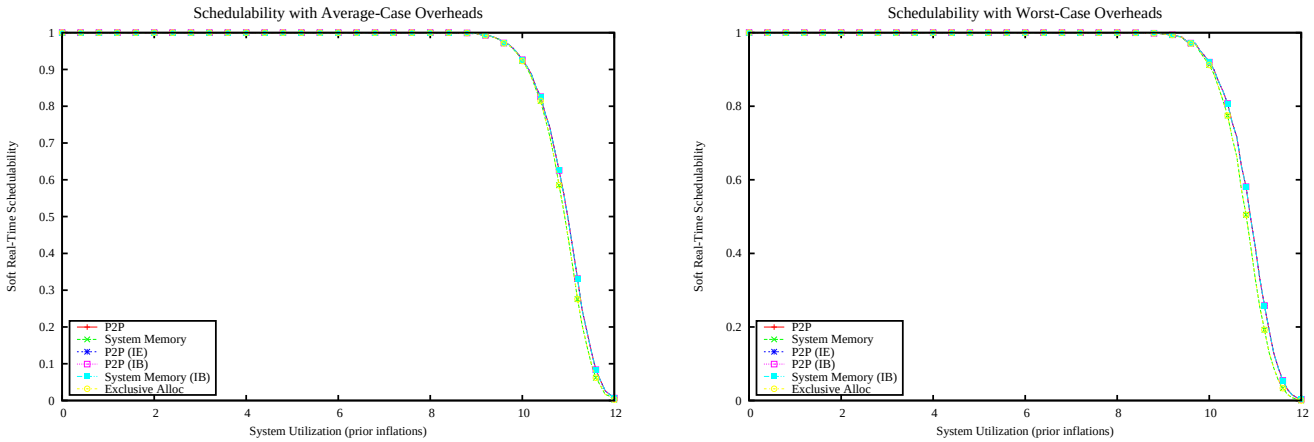

Figure 7388: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

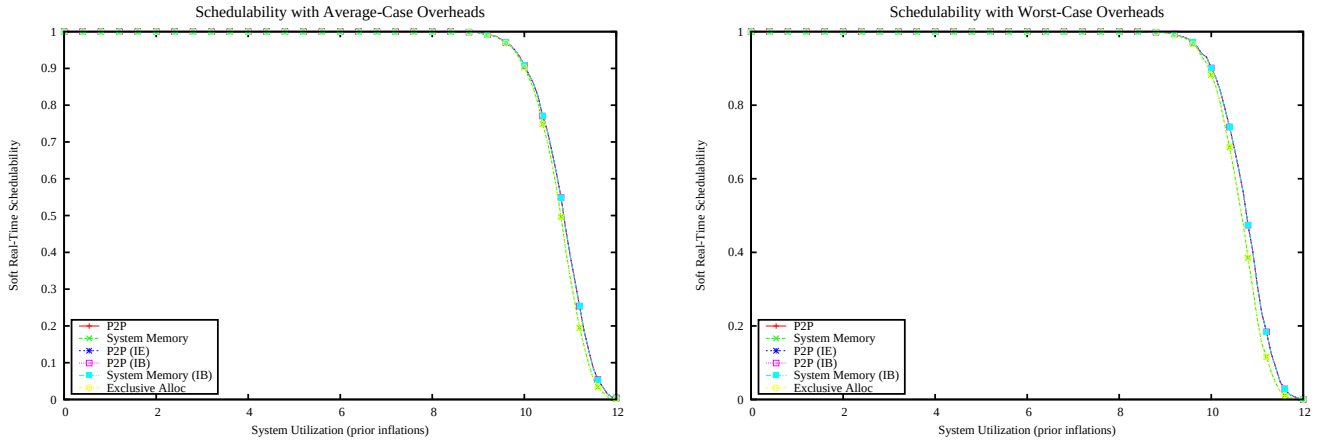

Figure 7389: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

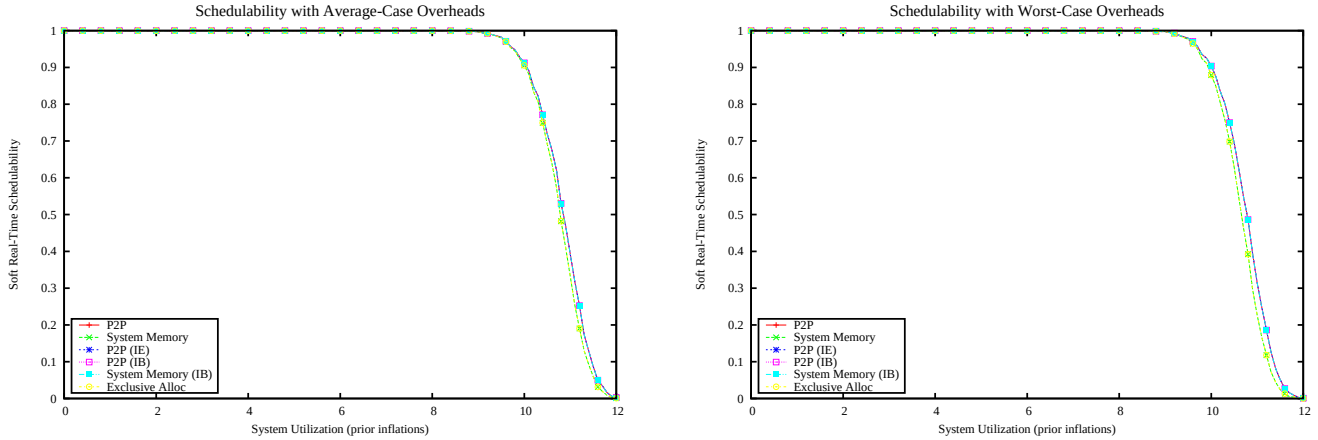

Figure 7390: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

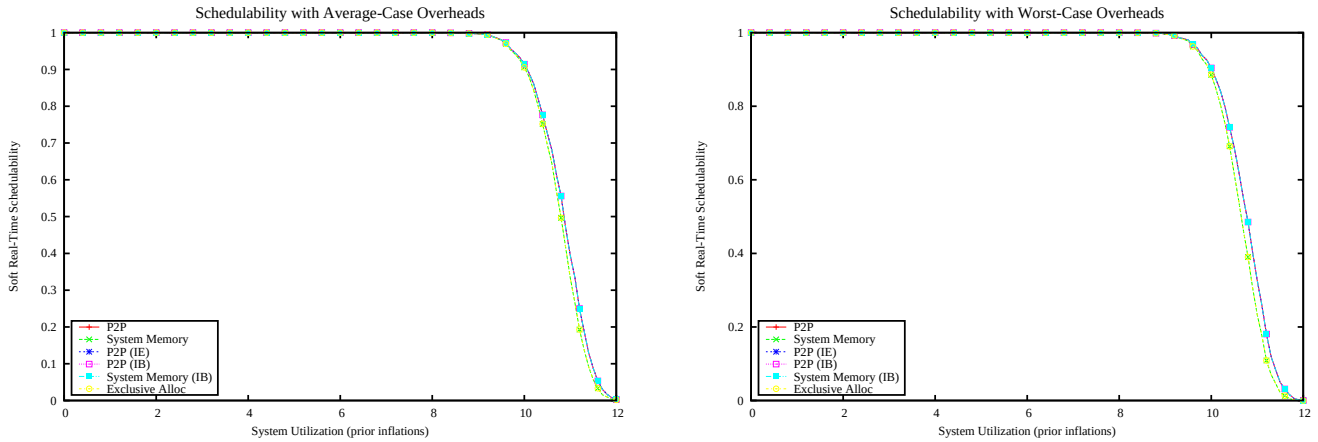

Figure 7391: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

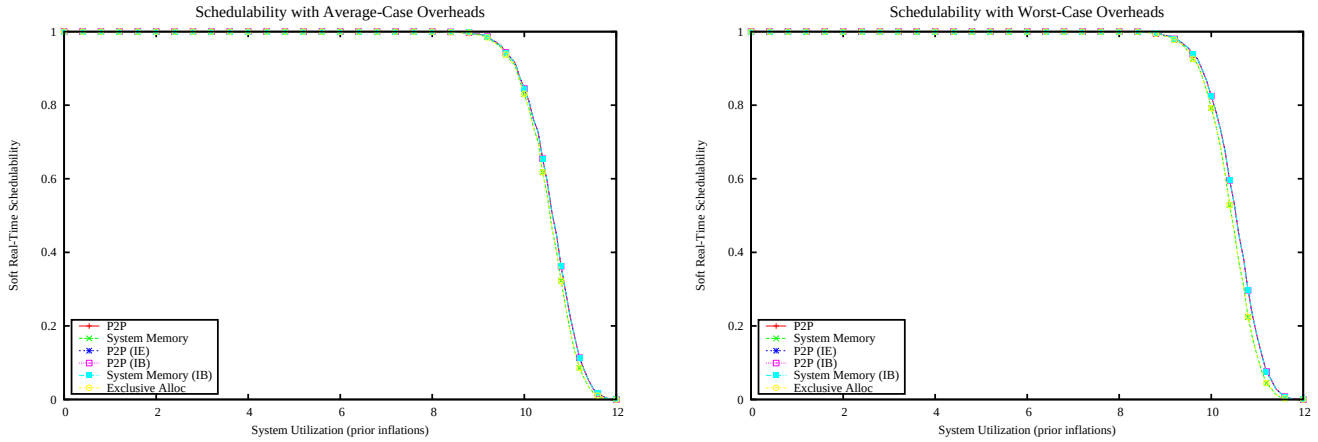

Figure 7392: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

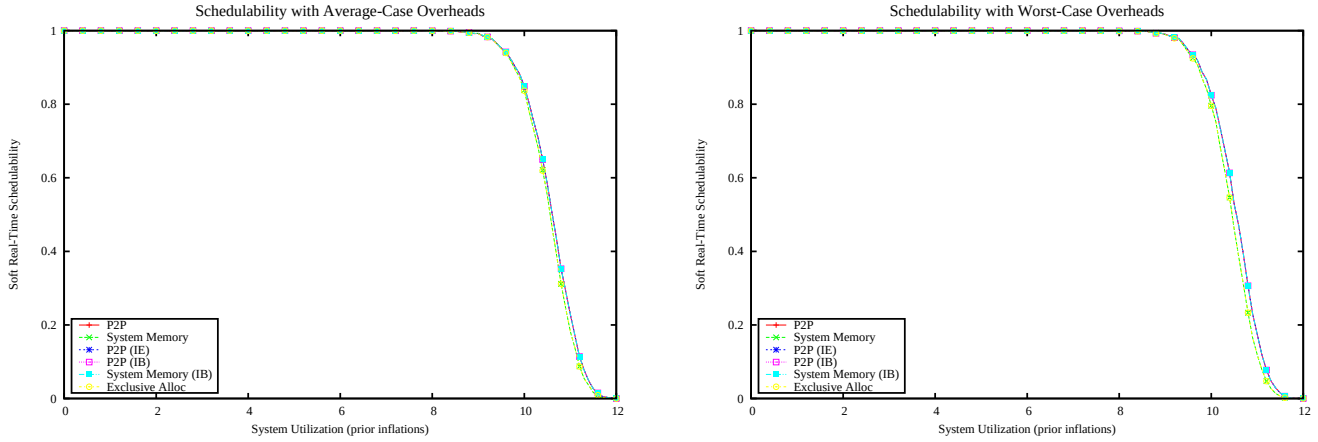

Figure 7393: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

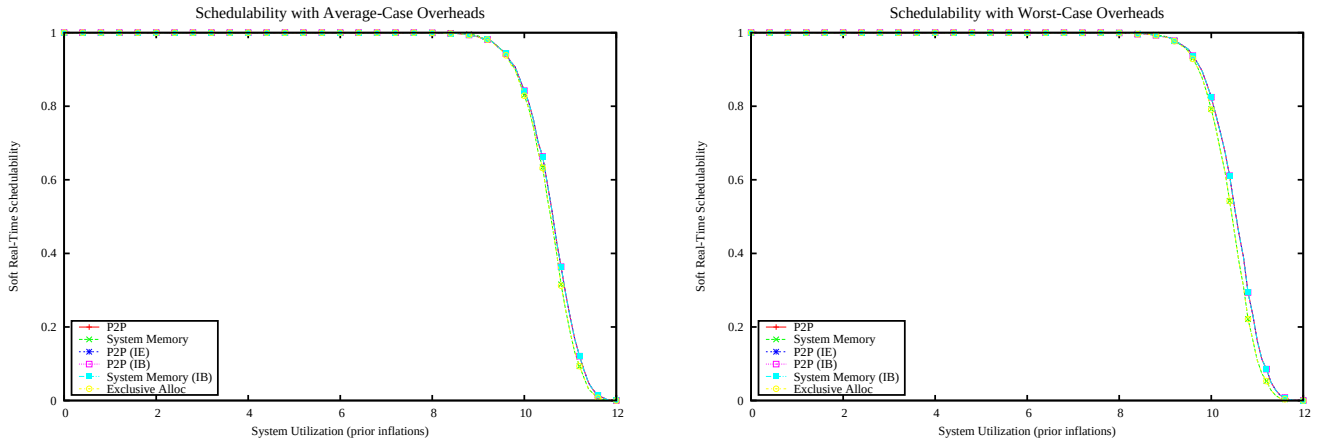

Figure 7394: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

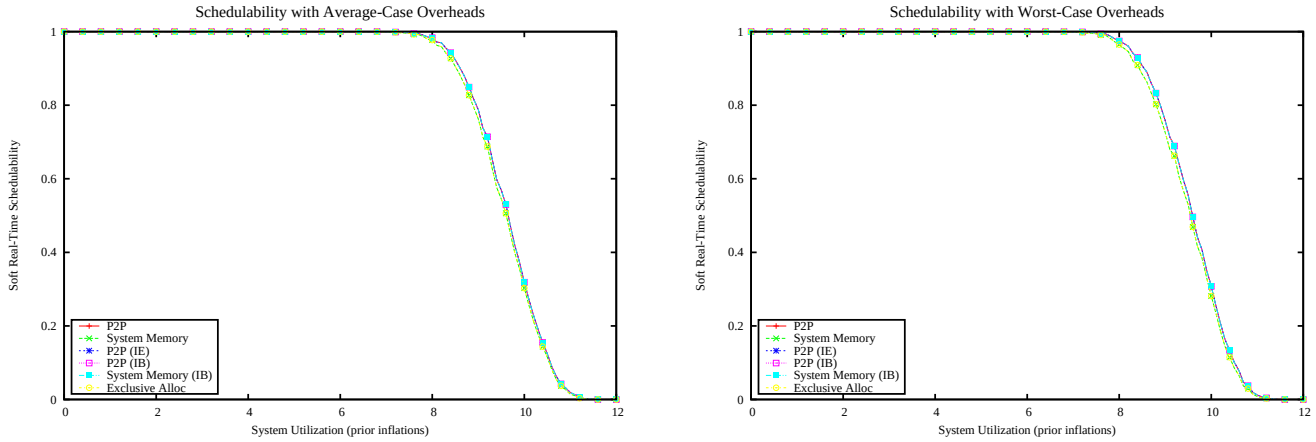

Figure 7395: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

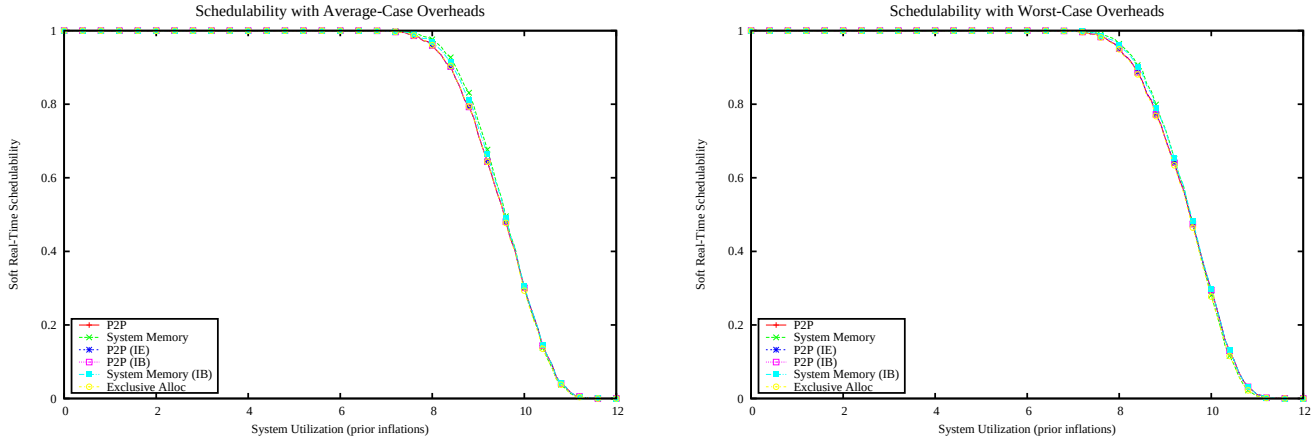

Figure 7396: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

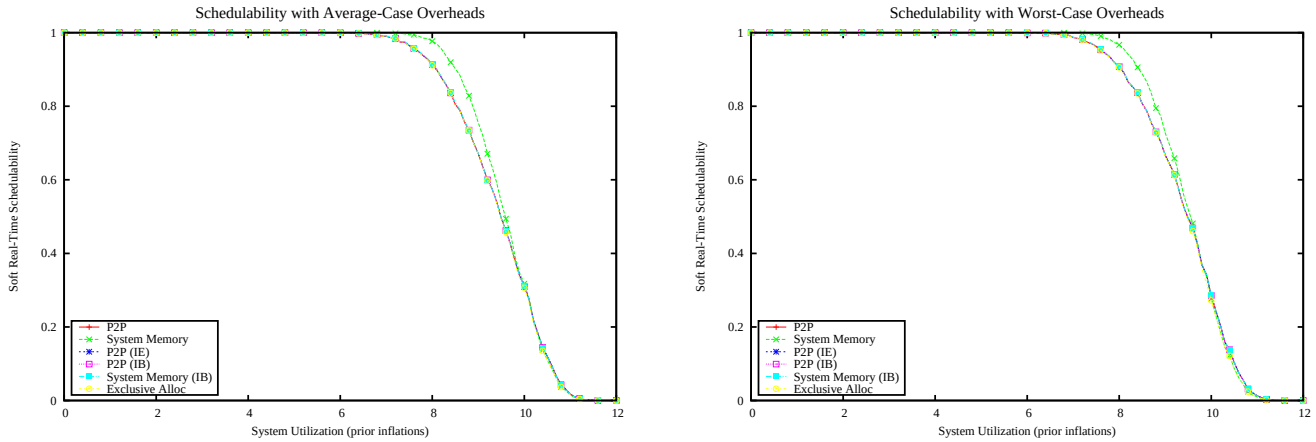

Figure 7397: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

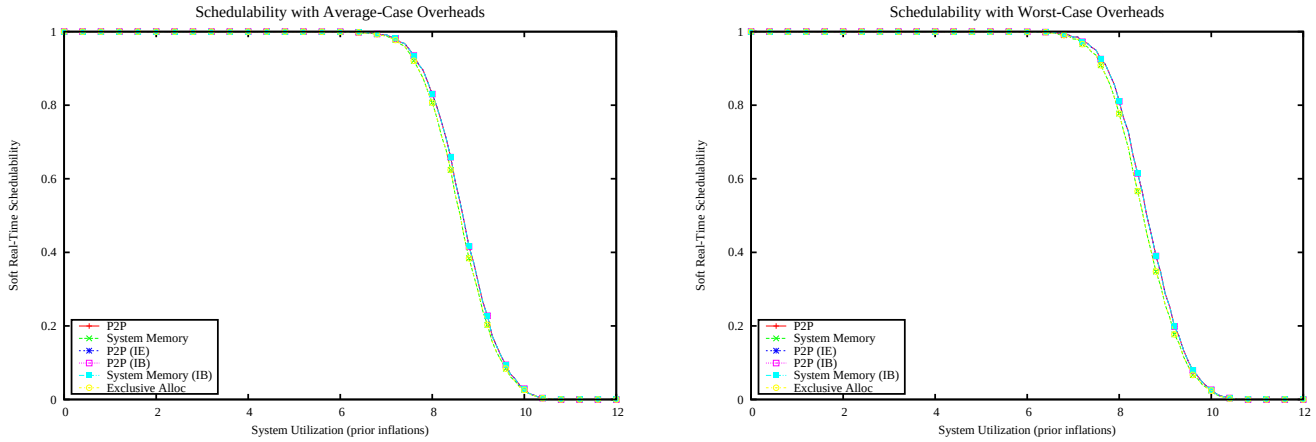

Figure 7398: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

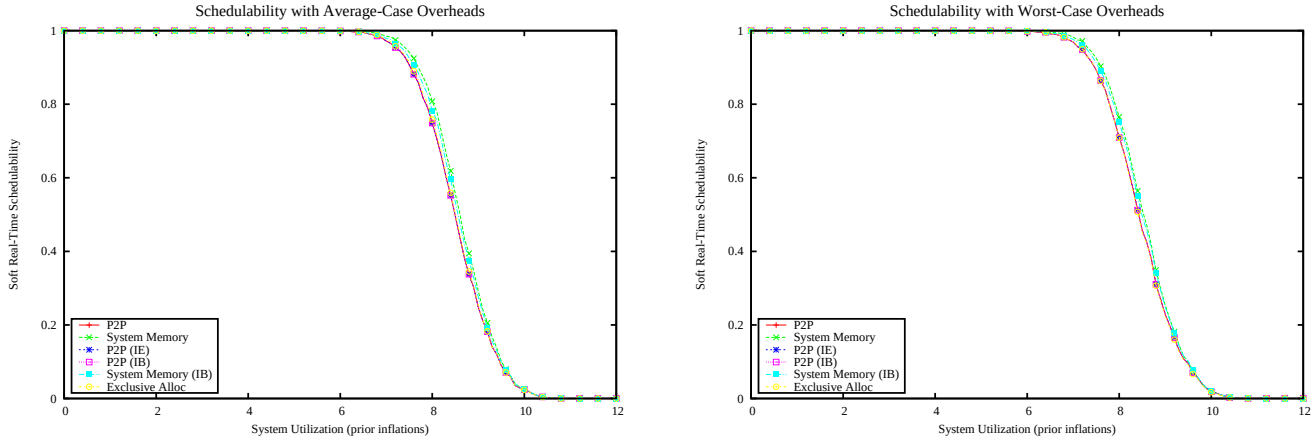

Figure 7399: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

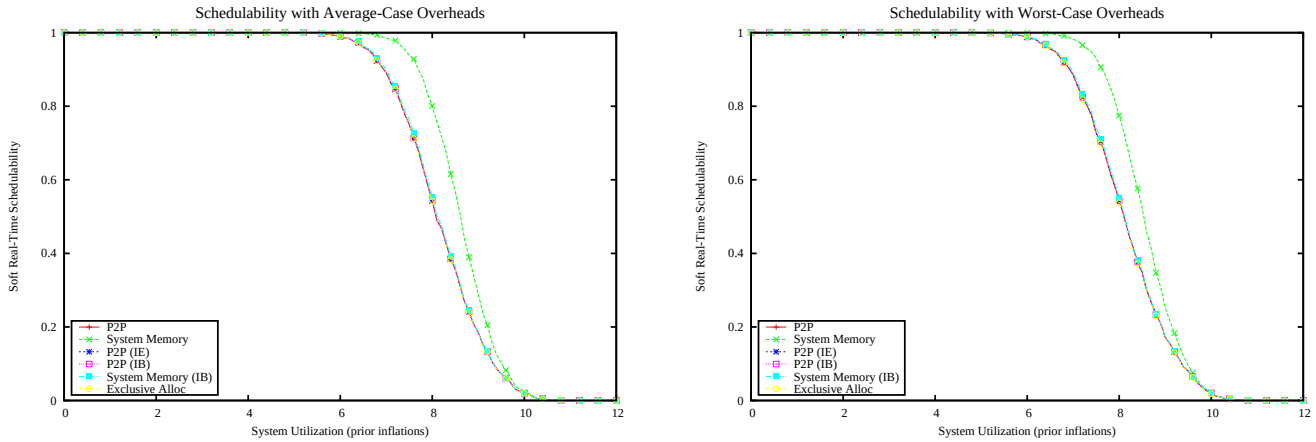

Figure 7400: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

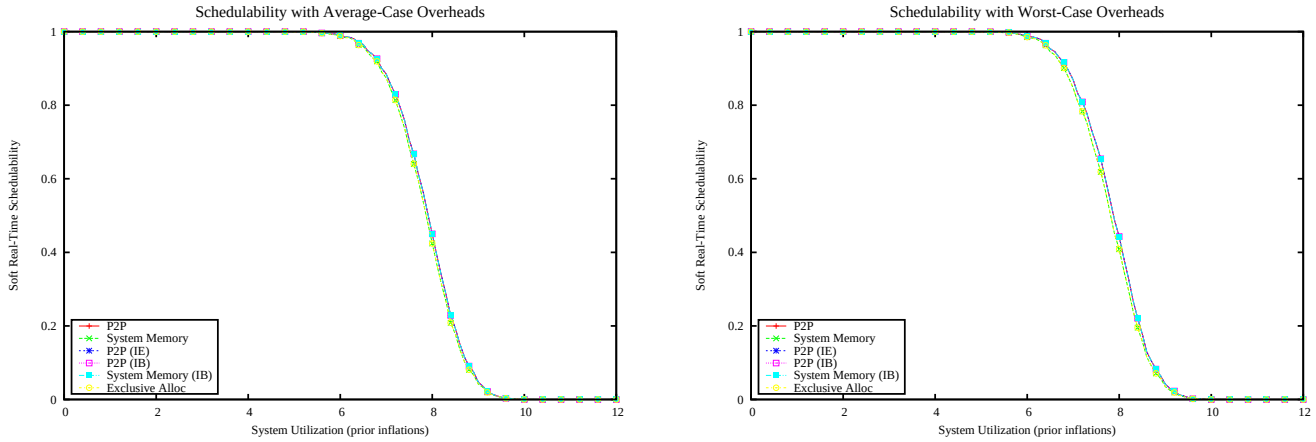

Figure 7401: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

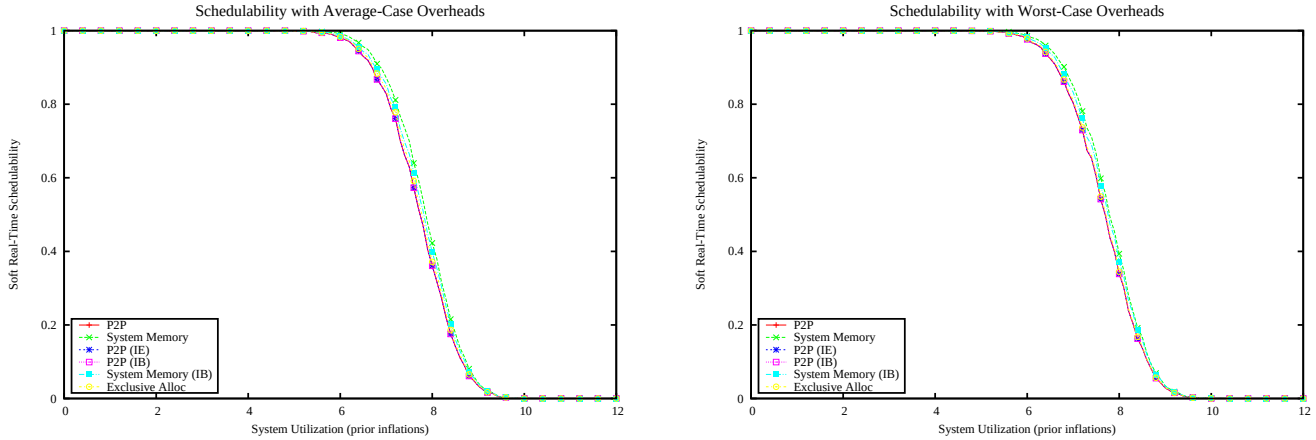

Figure 7402: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

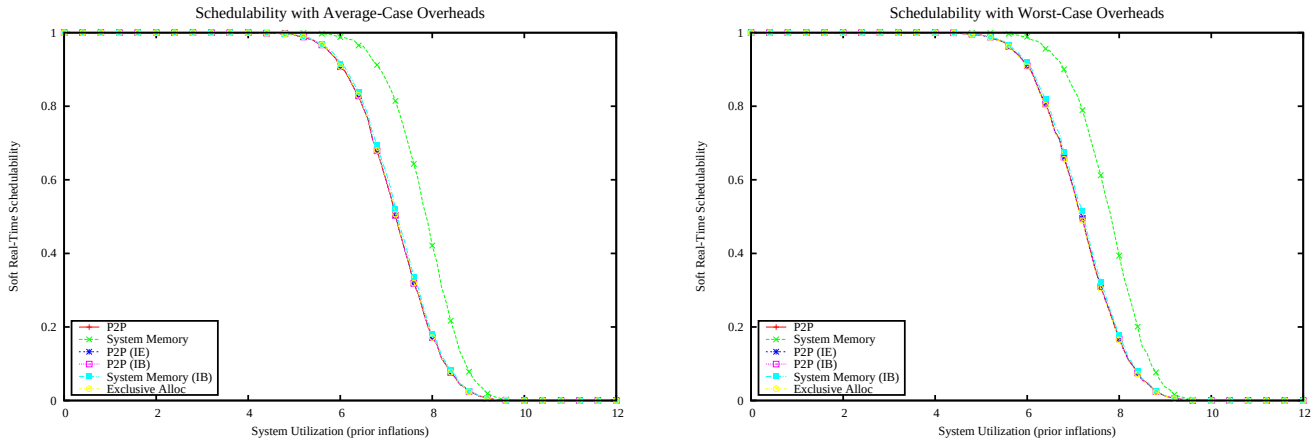

Figure 7403: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

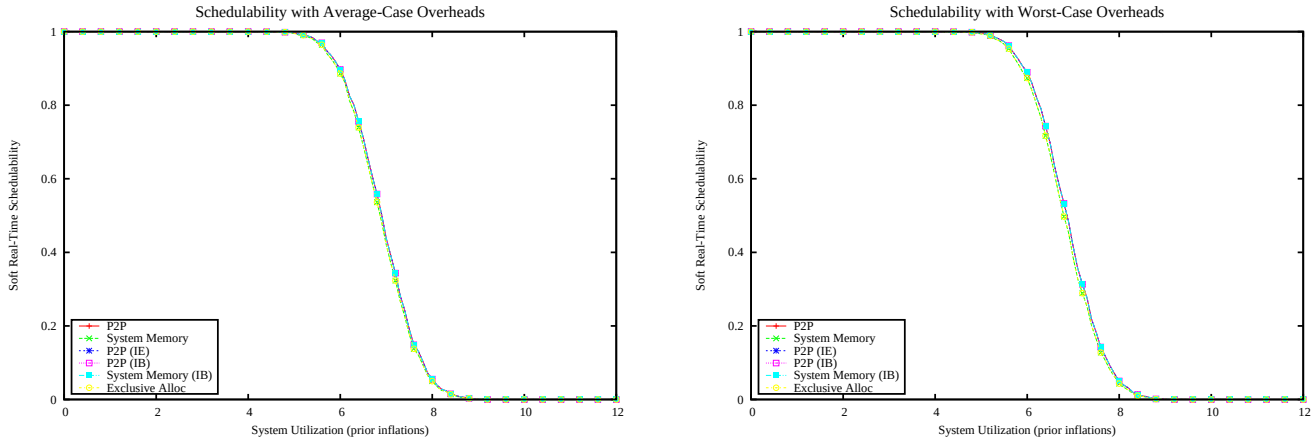

Figure 7404: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

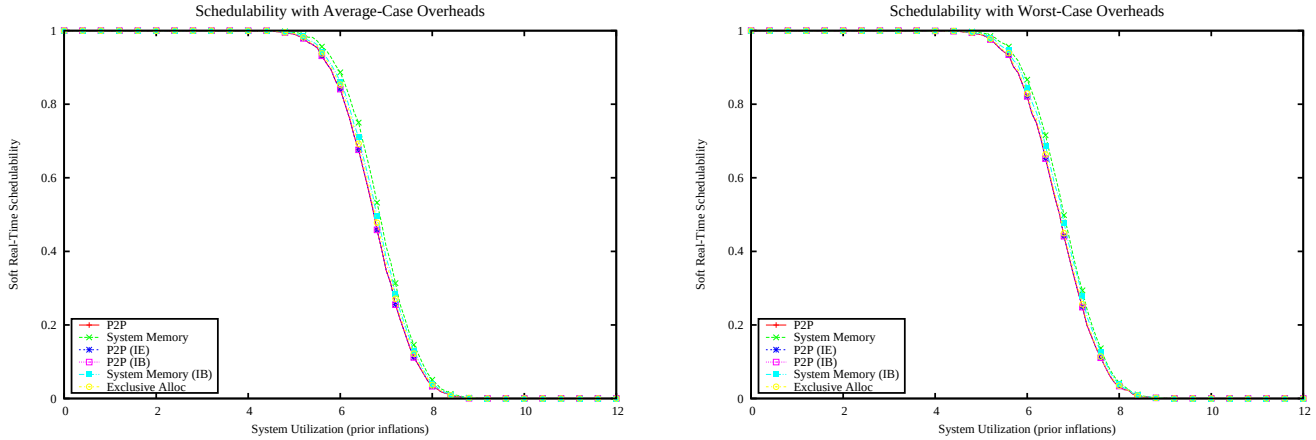

Figure 7405: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

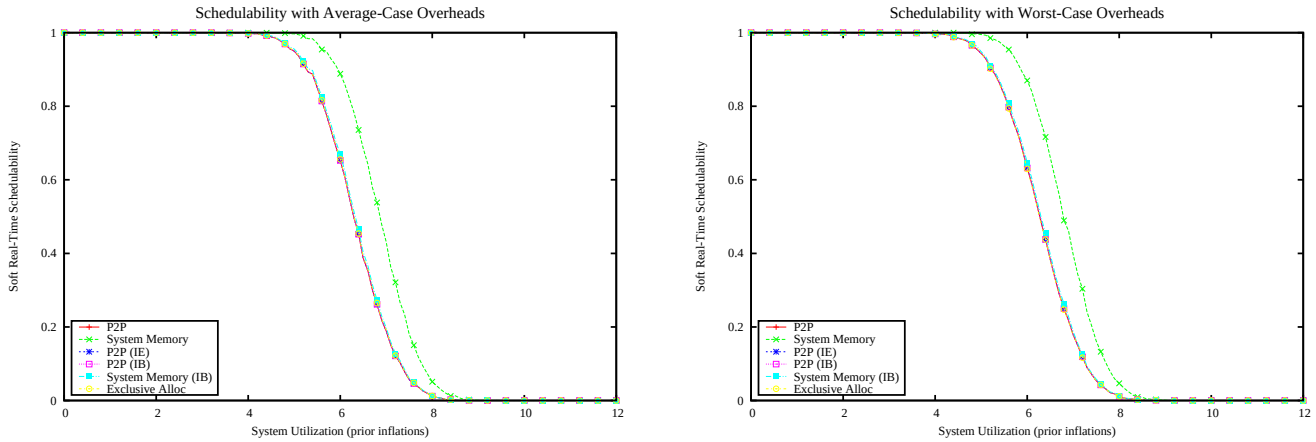

Figure 7406: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

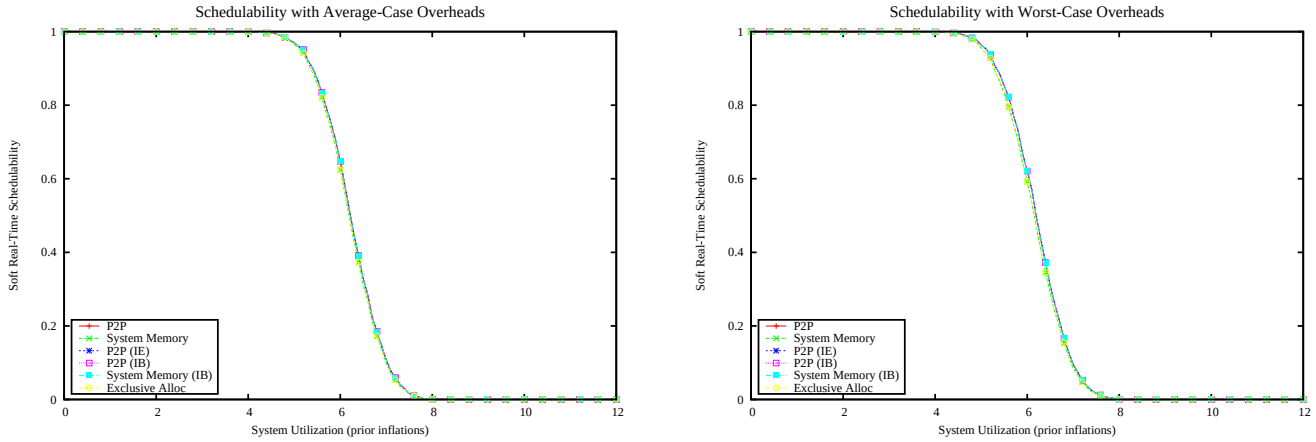

Figure 7407: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

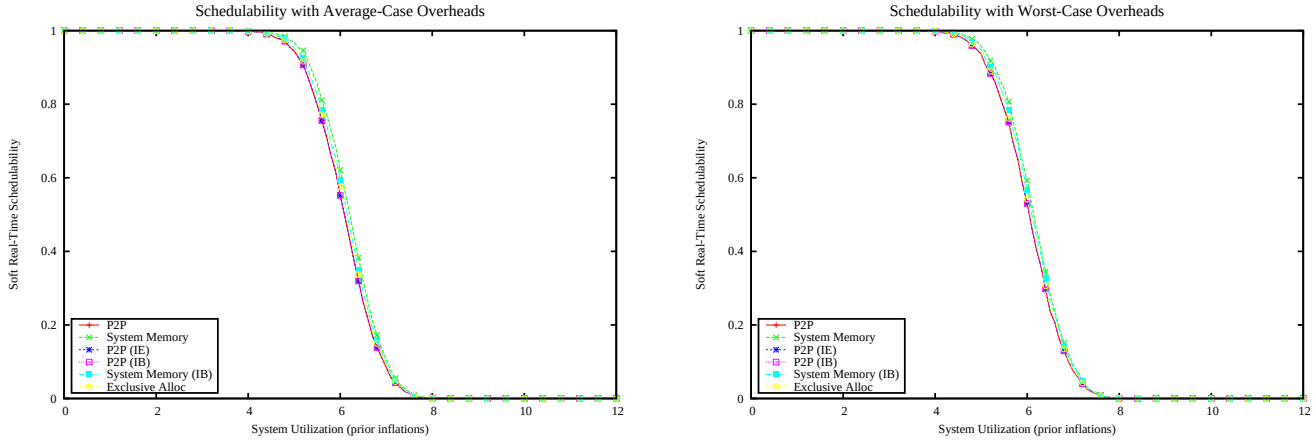

Figure 7408: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

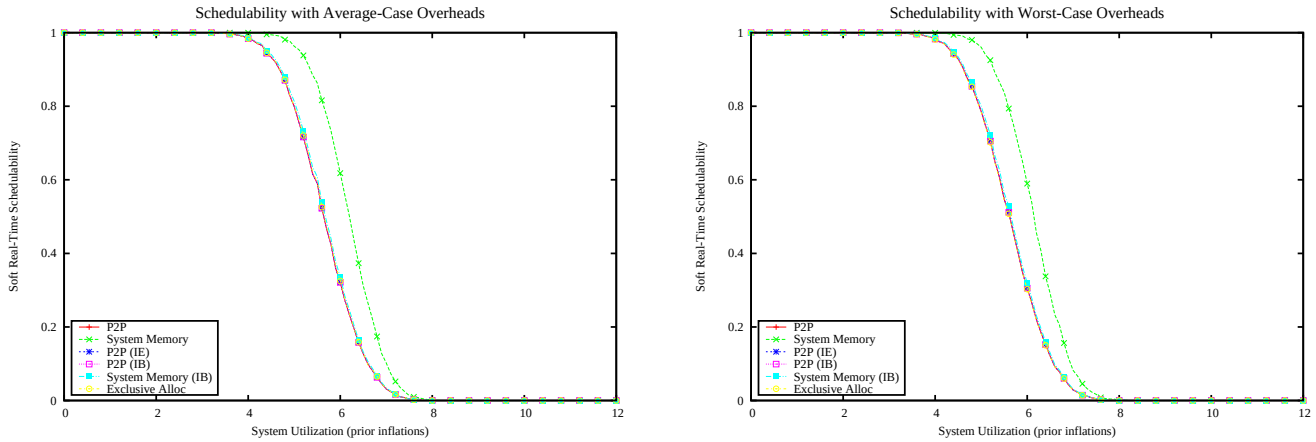

Figure 7409: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

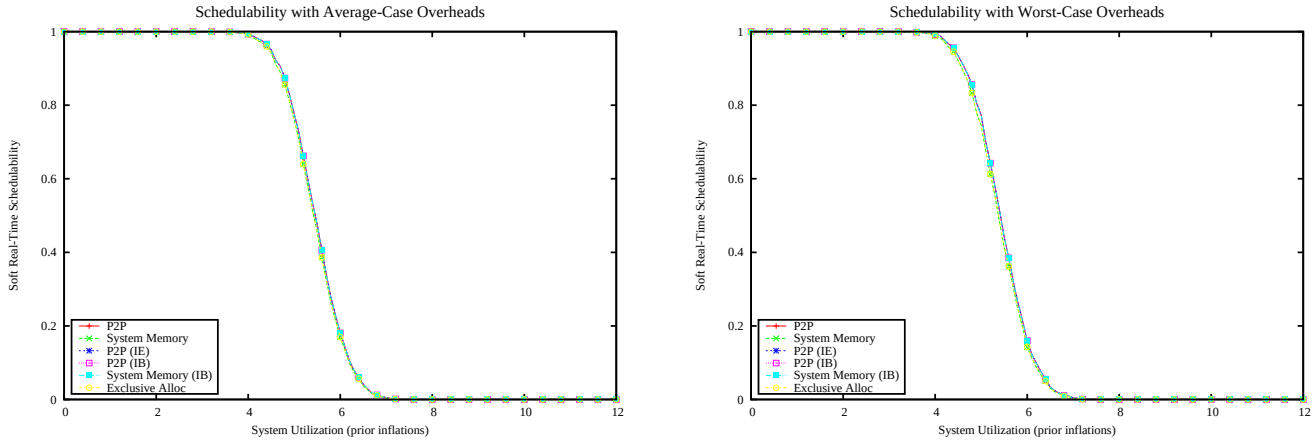

Figure 7410: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

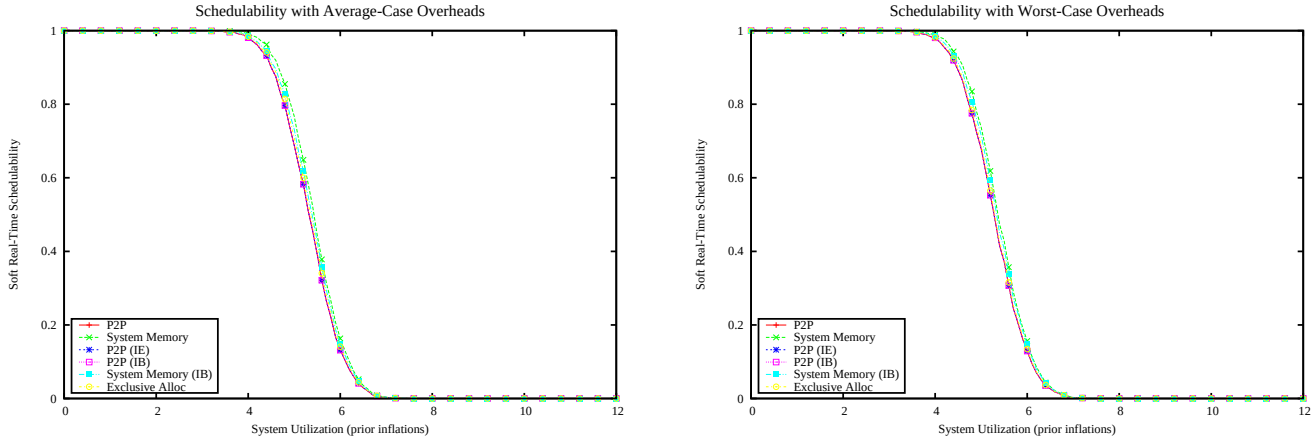

Figure 7411: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

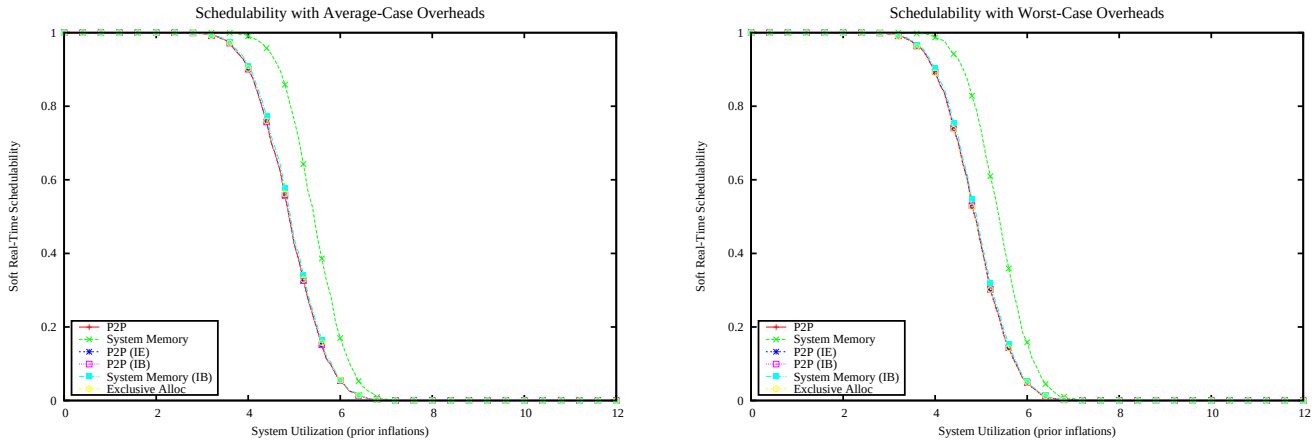

Figure 7412: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

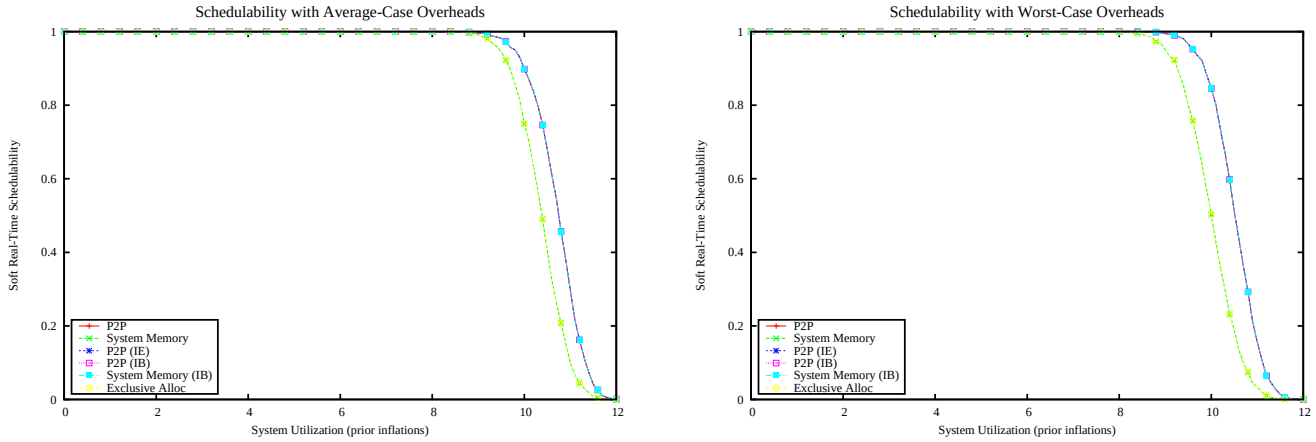

Figure 7413: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

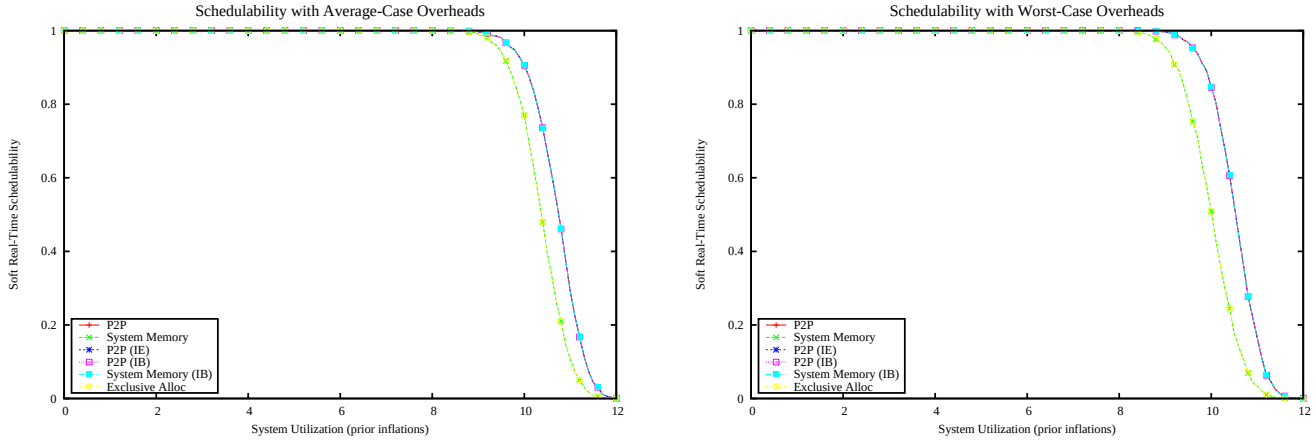

Figure 7414: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

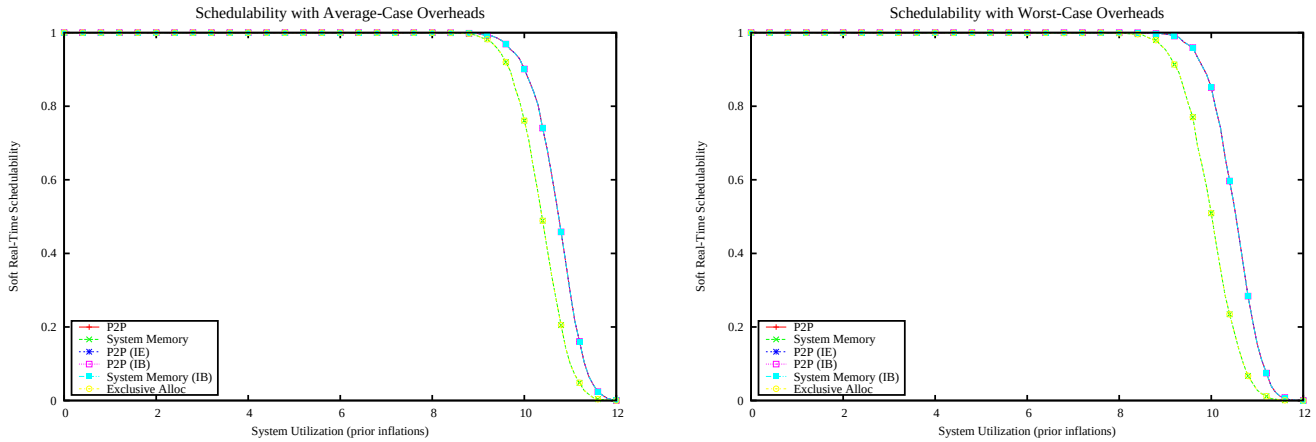

Figure 7415: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

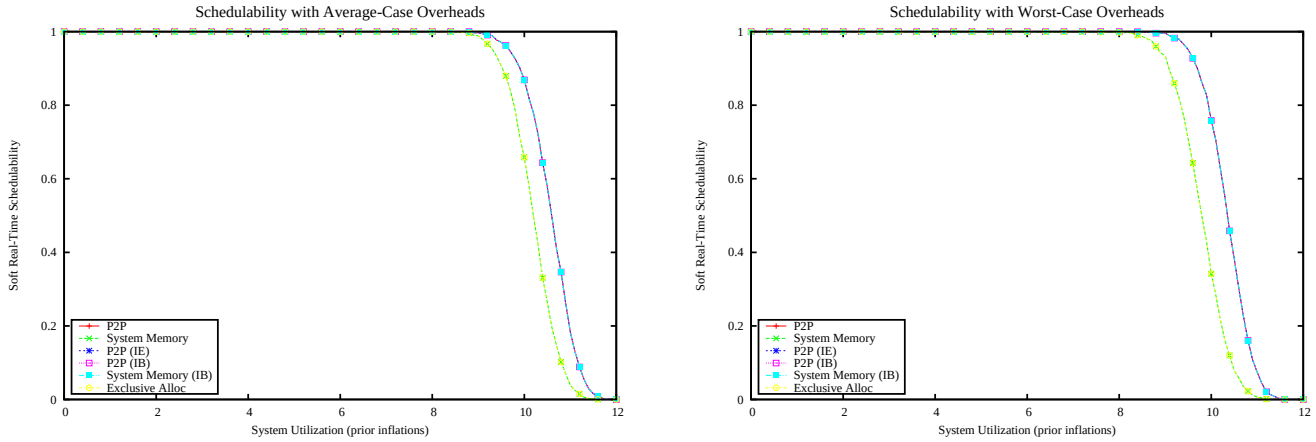

Figure 7416: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

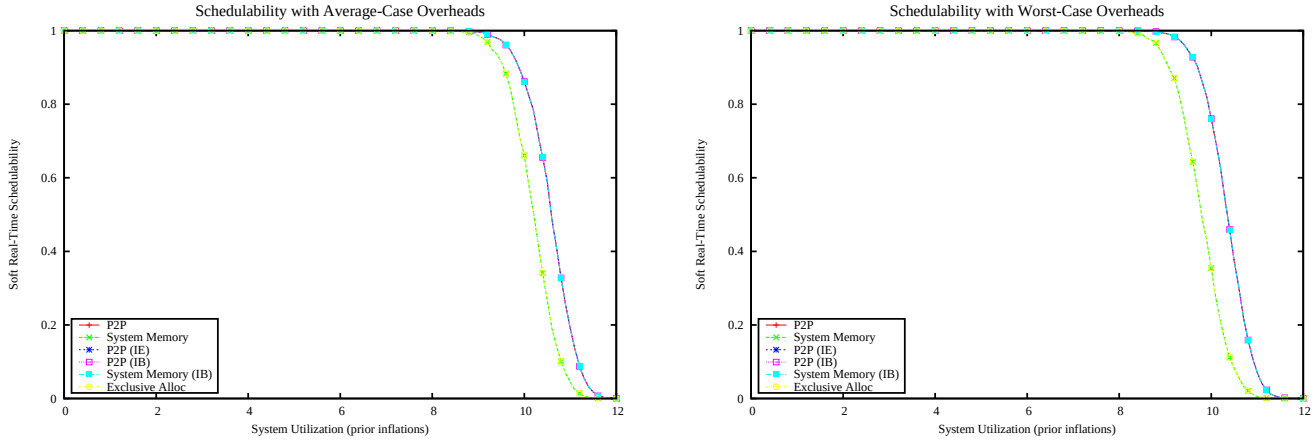

Figure 7417: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

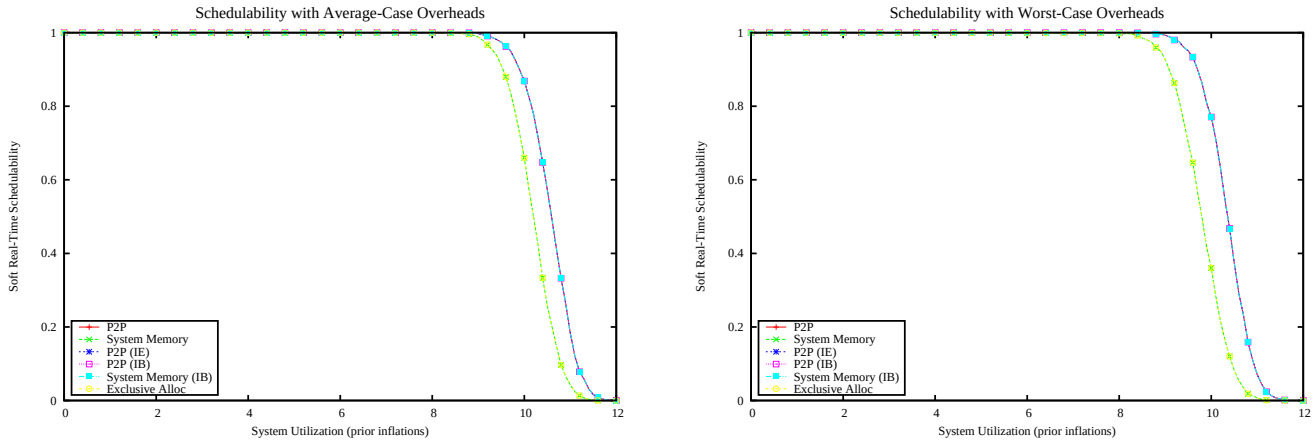

Figure 7418: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

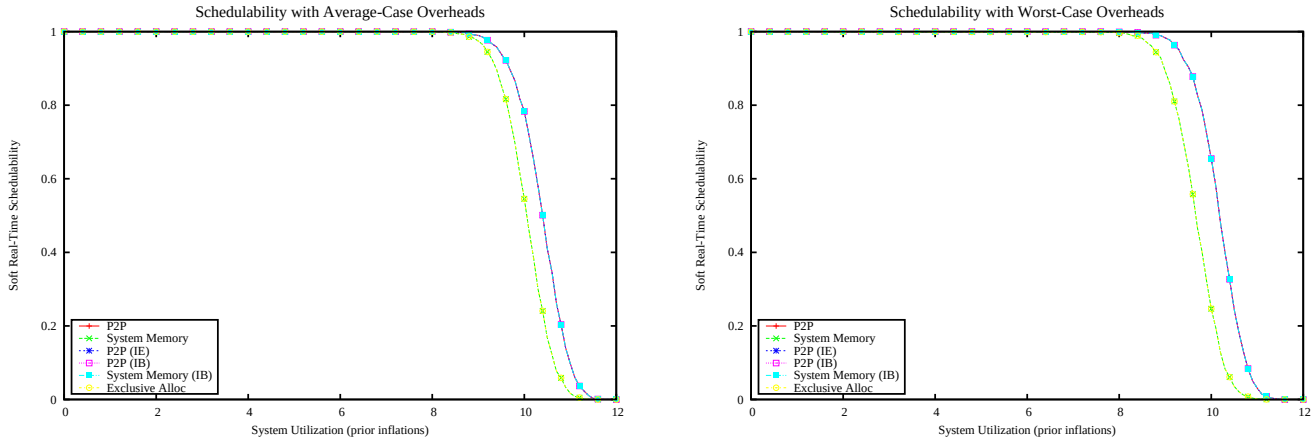

Figure 7419: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

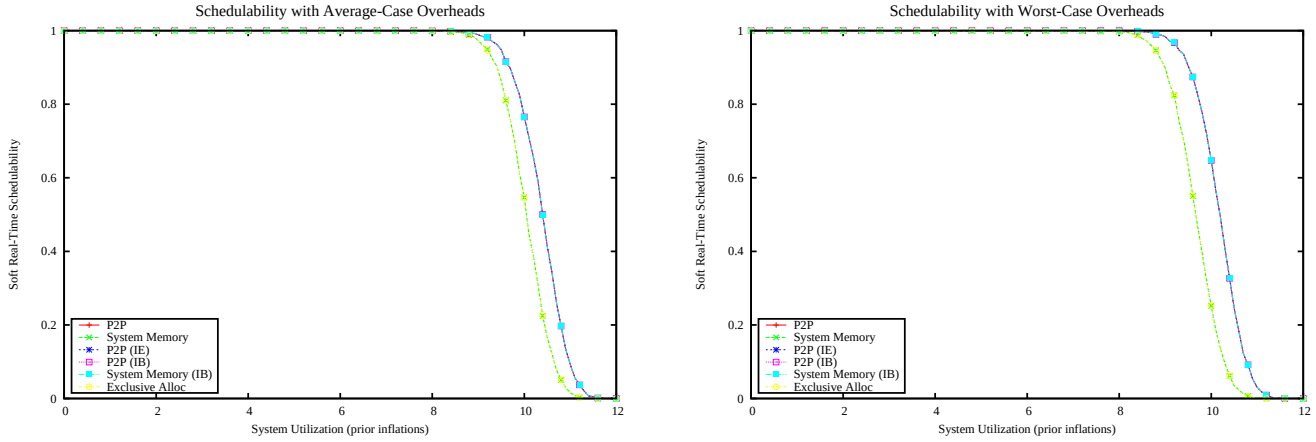

Figure 7420: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

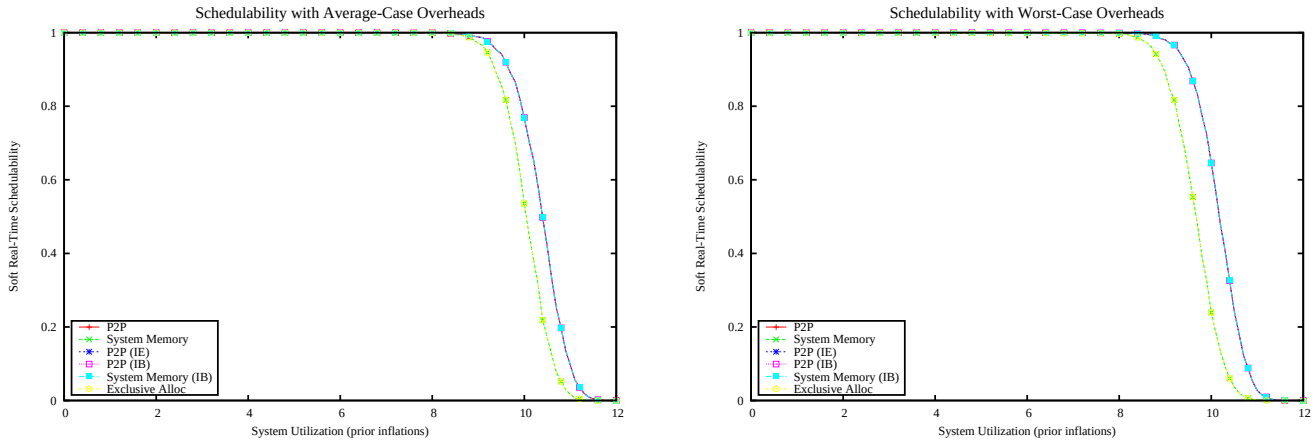

Figure 7421: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

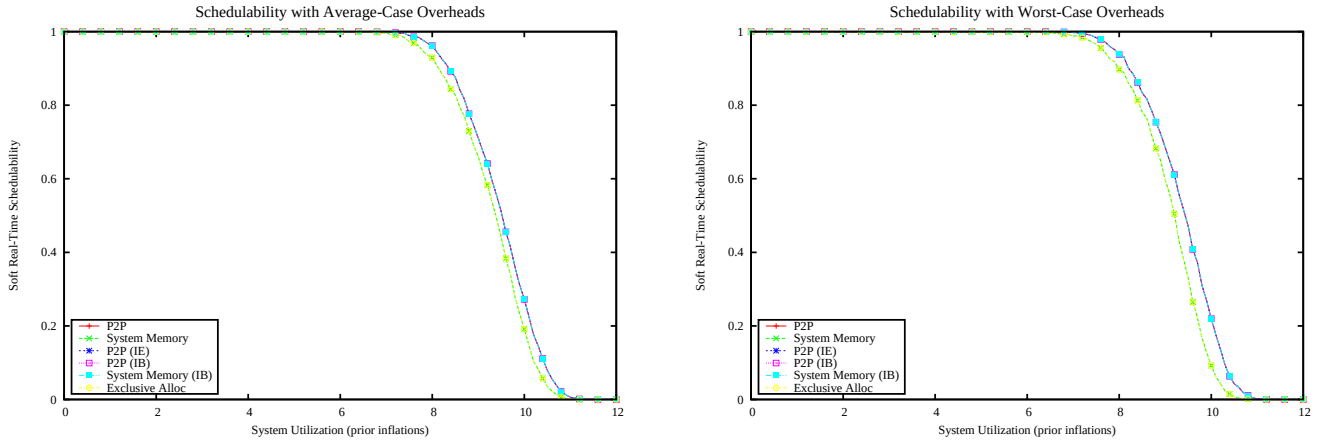

Figure 7422: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

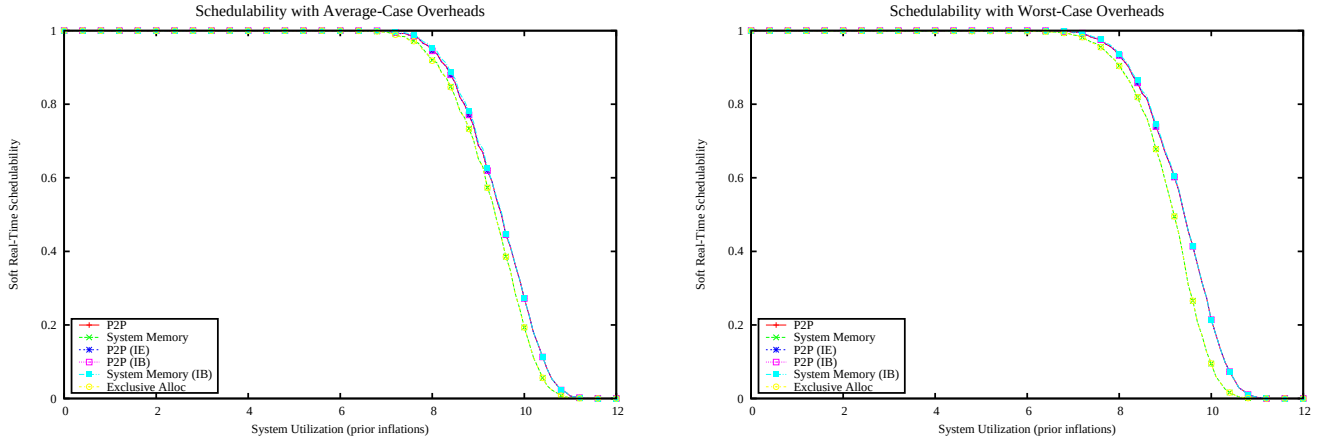

Figure 7423: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

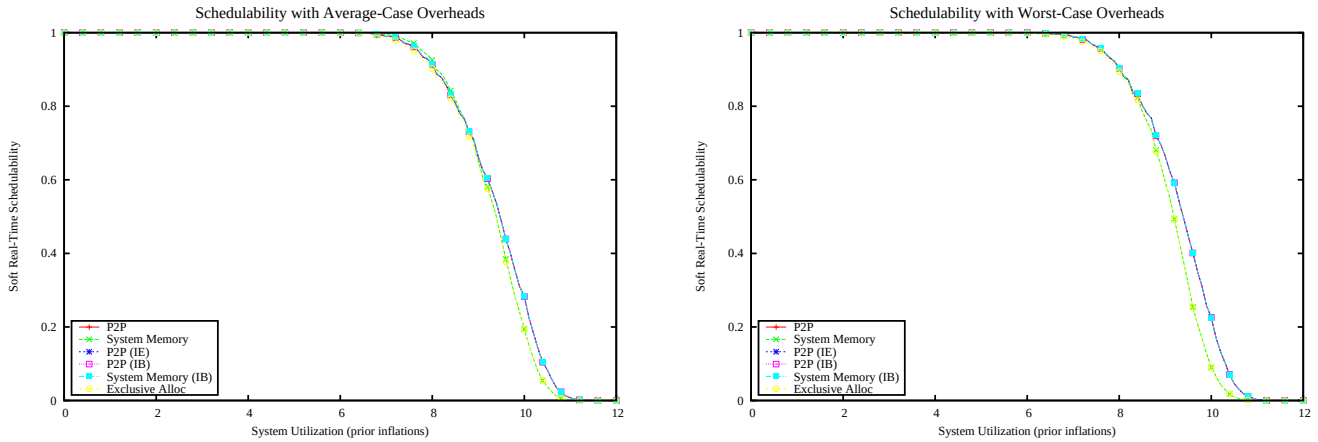

Figure 7424: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

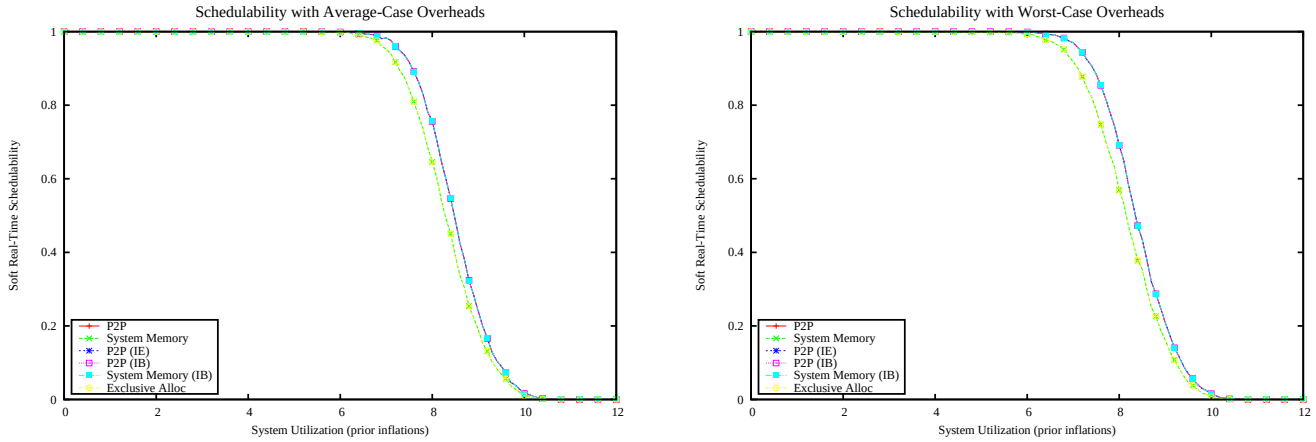

Figure 7425: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

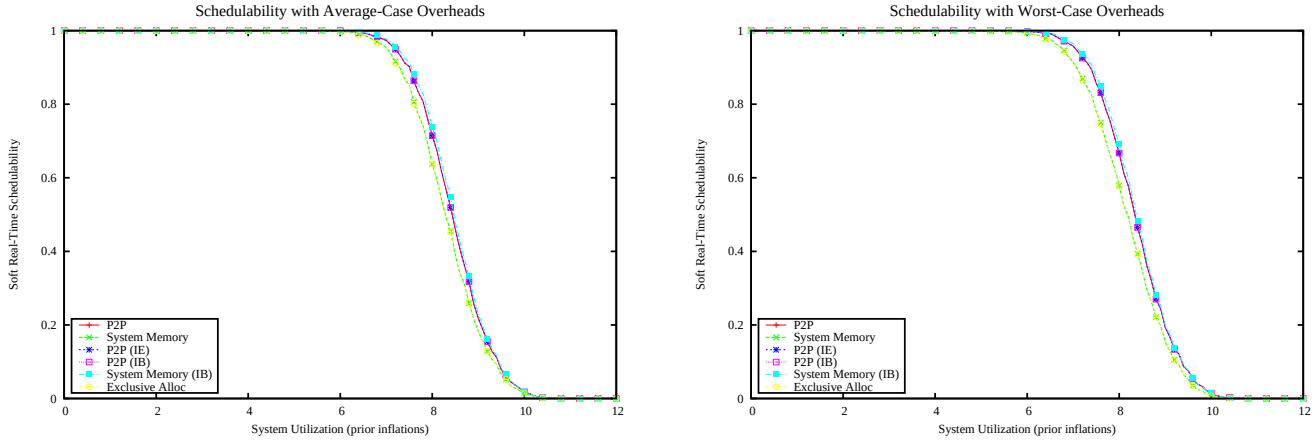

Figure 7426: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

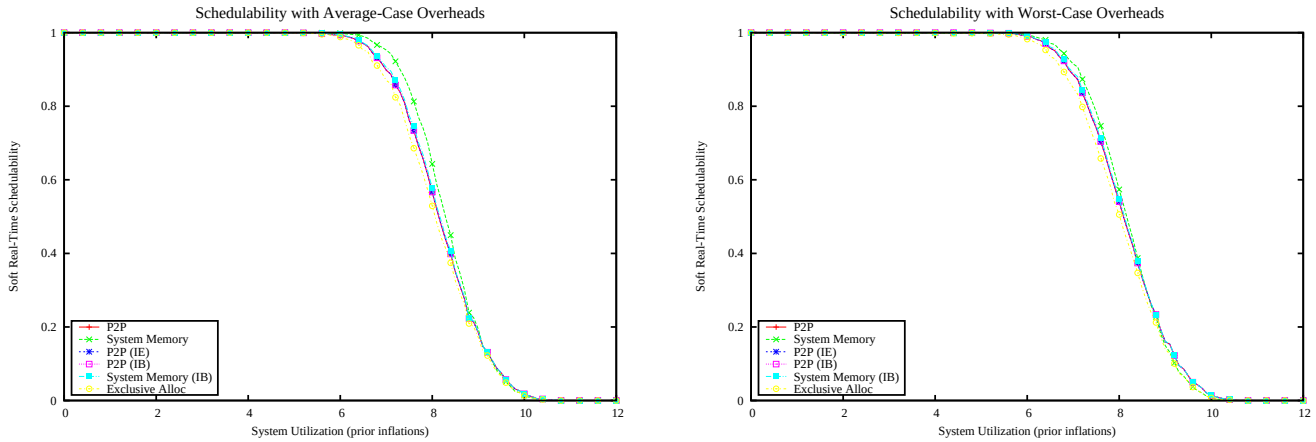

Figure 7427: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

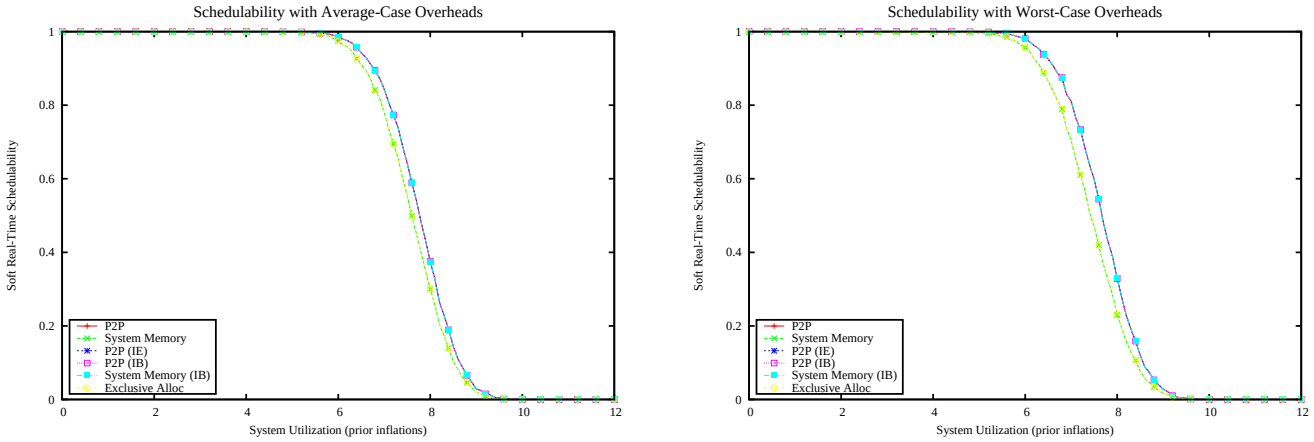

Figure 7428: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

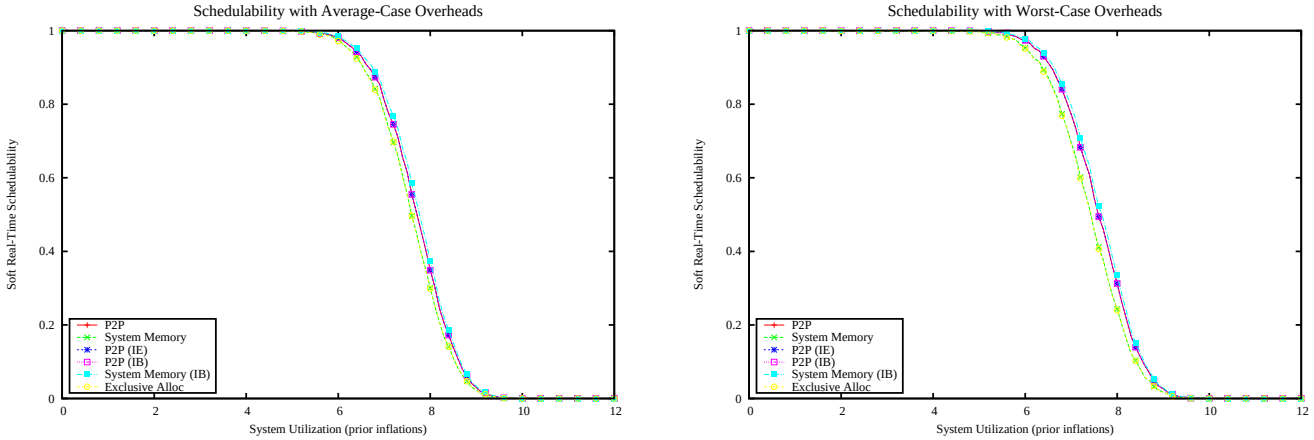

Figure 7429: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

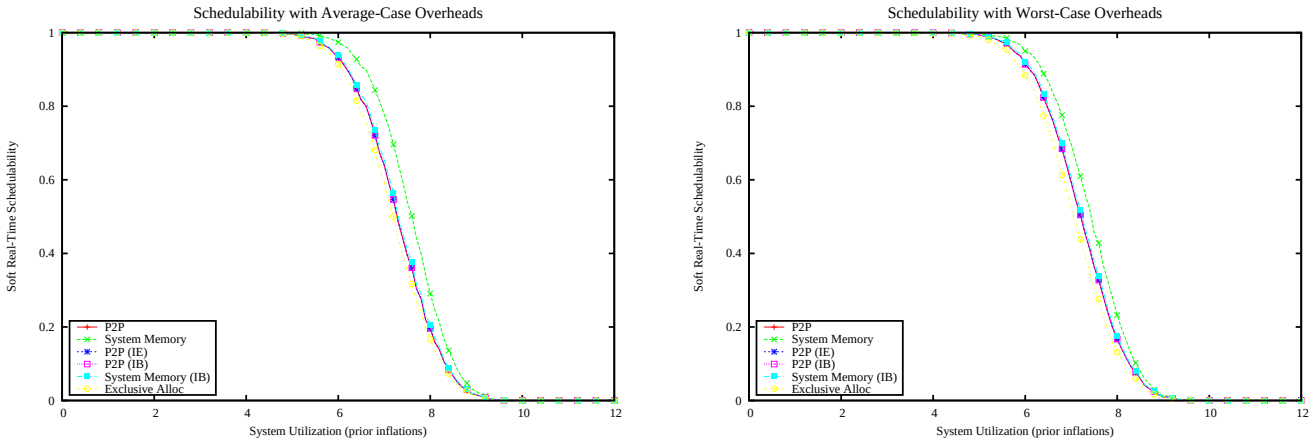

Figure 7430: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

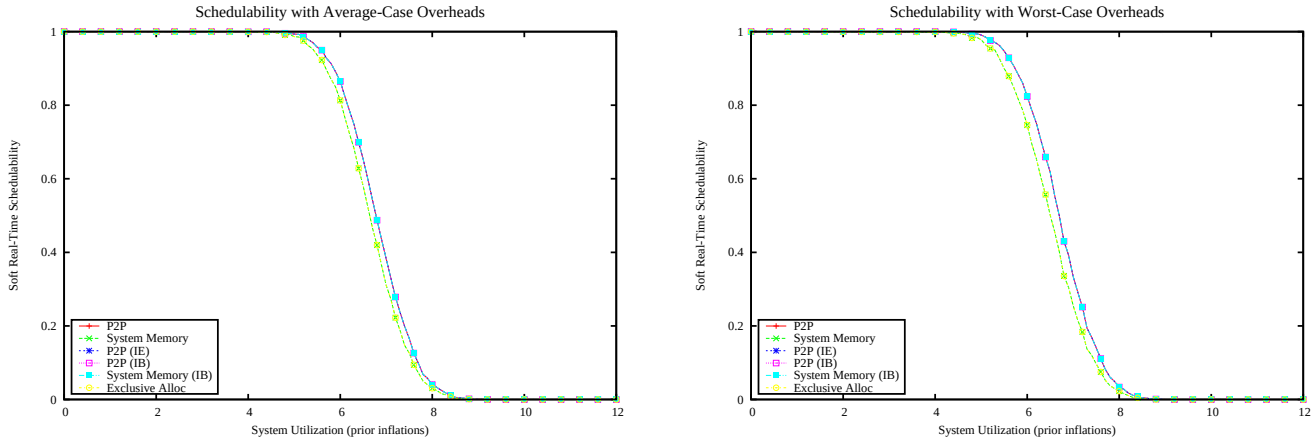

Figure 7431: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

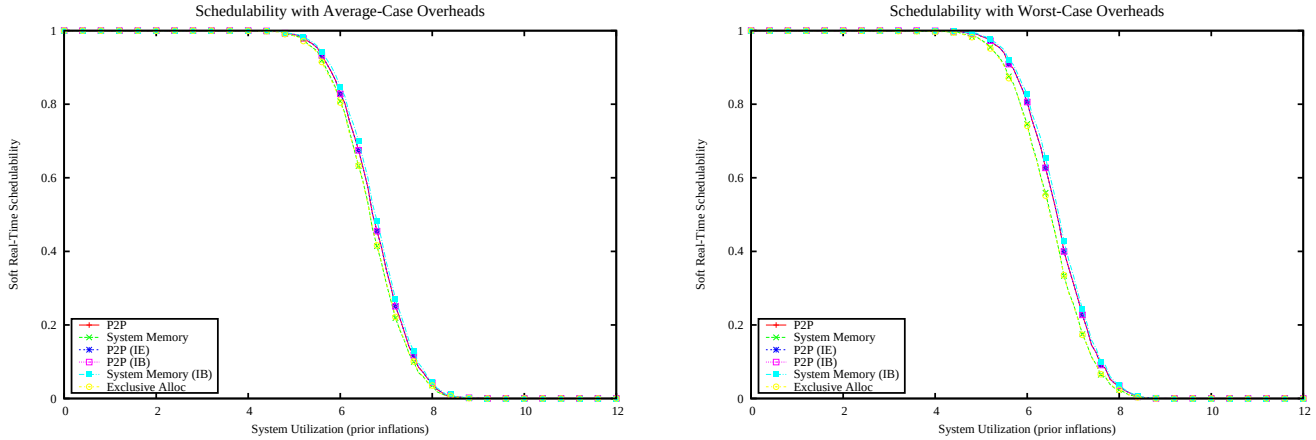

Figure 7432: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

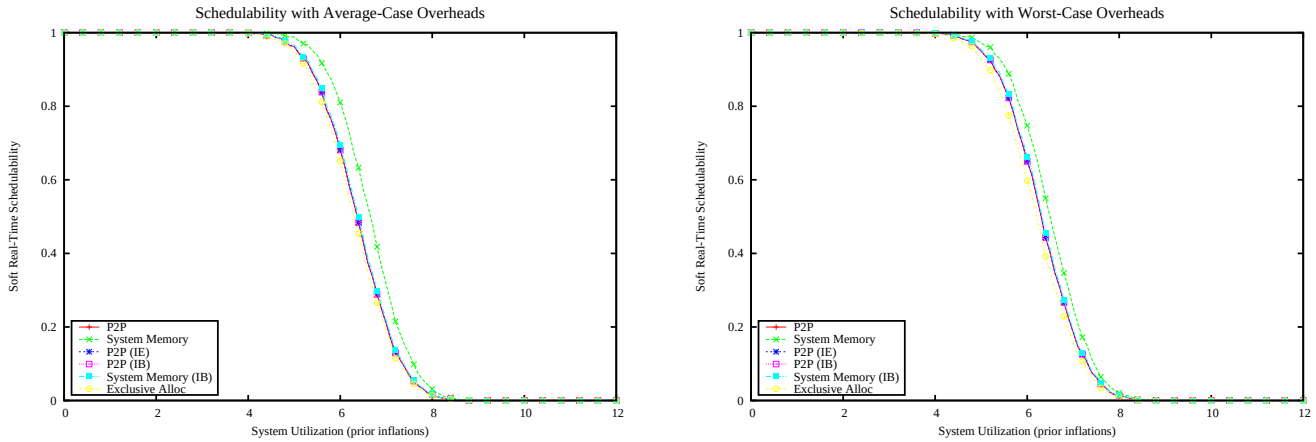

Figure 7433: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

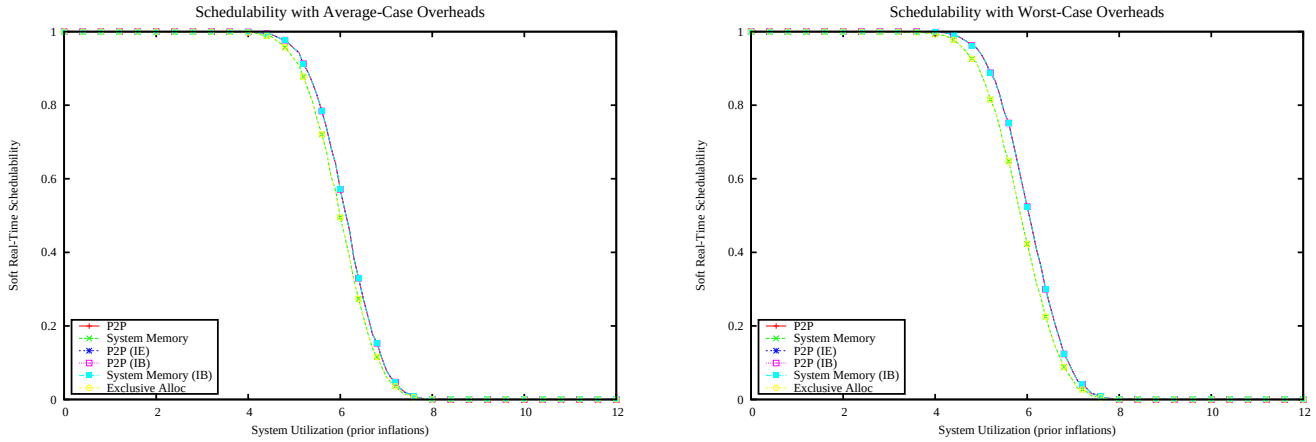

Figure 7434: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

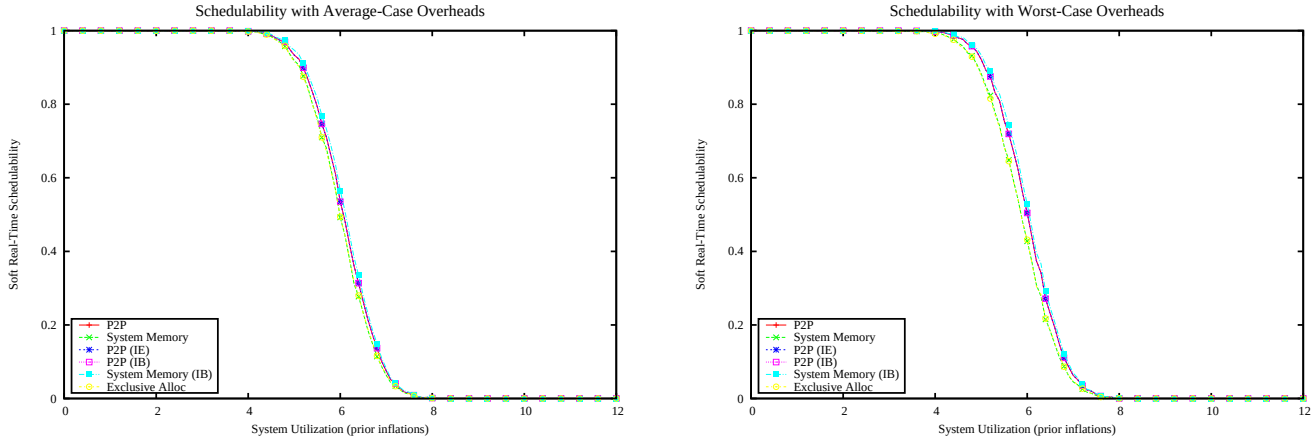

Figure 7435: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

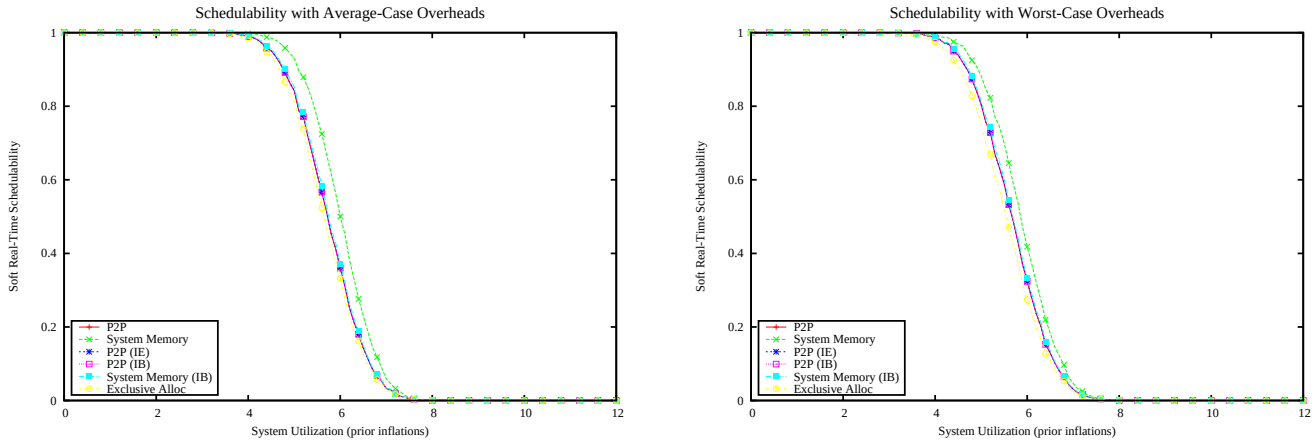

Figure 7436: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

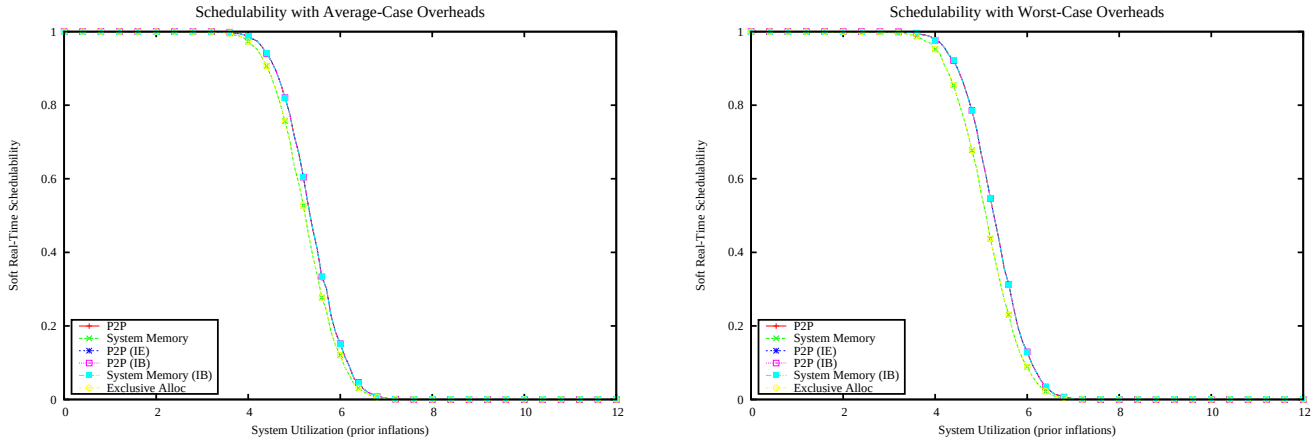

Figure 7437: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

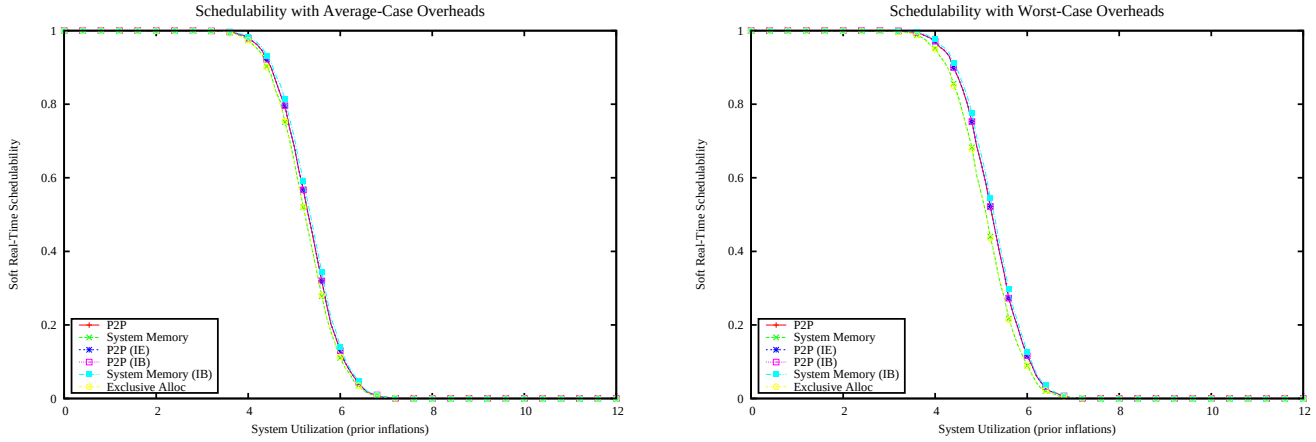

Figure 7438: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

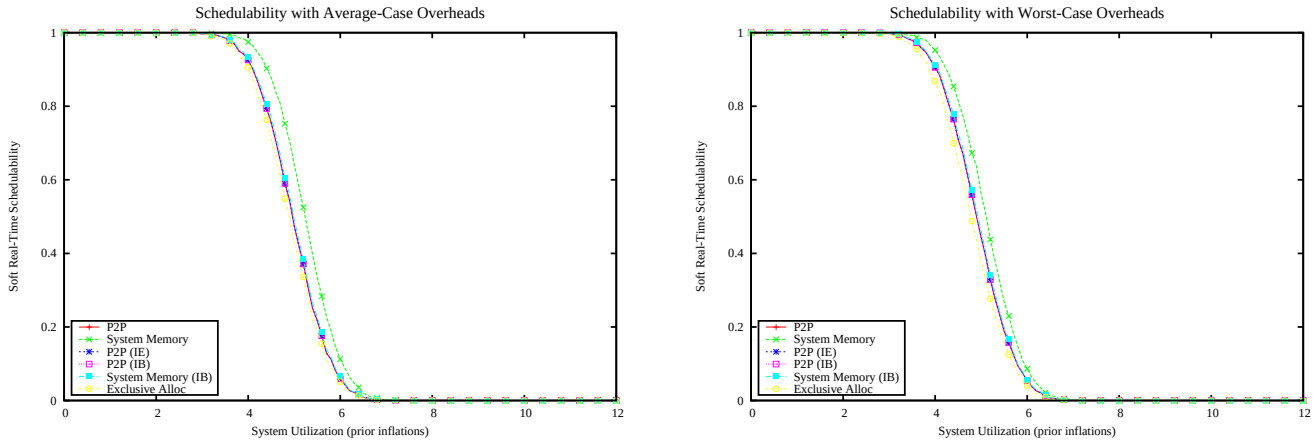

Figure 7439: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

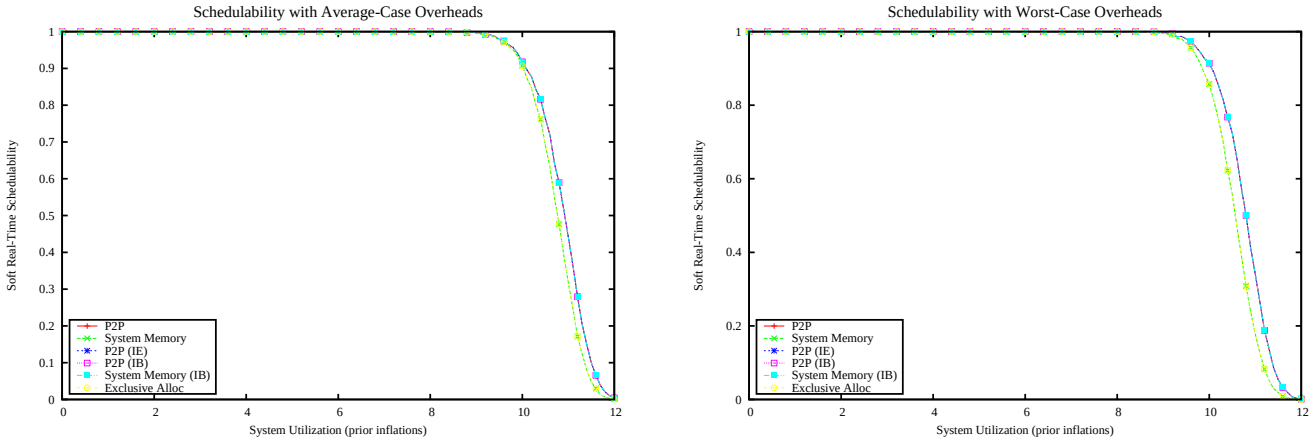

Figure 7440: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

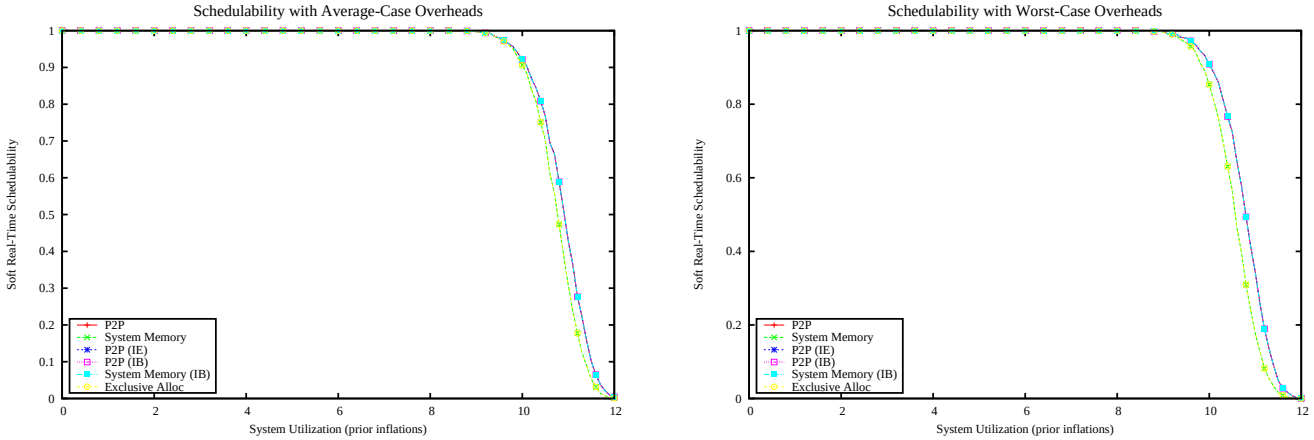

Figure 7441: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

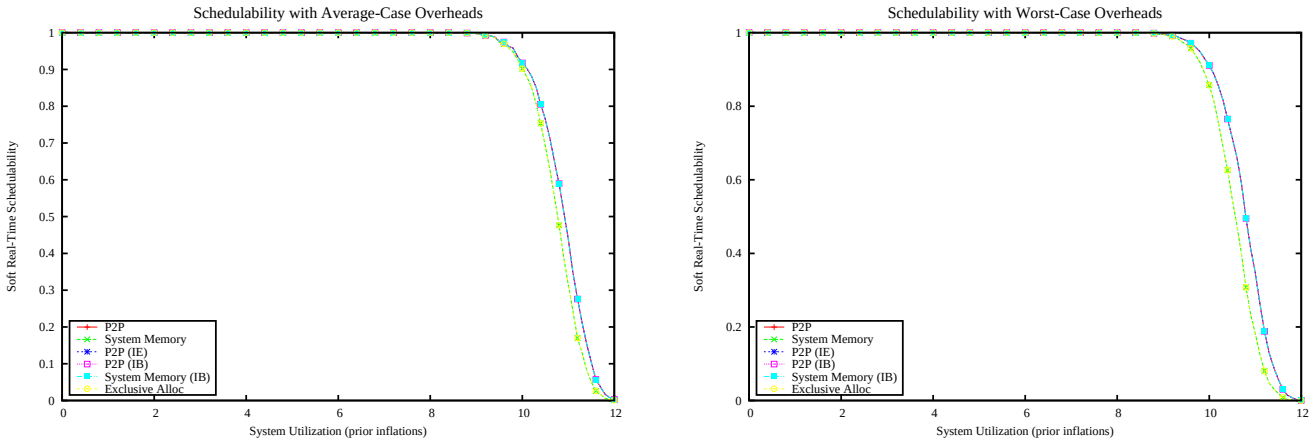

Figure 7442: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

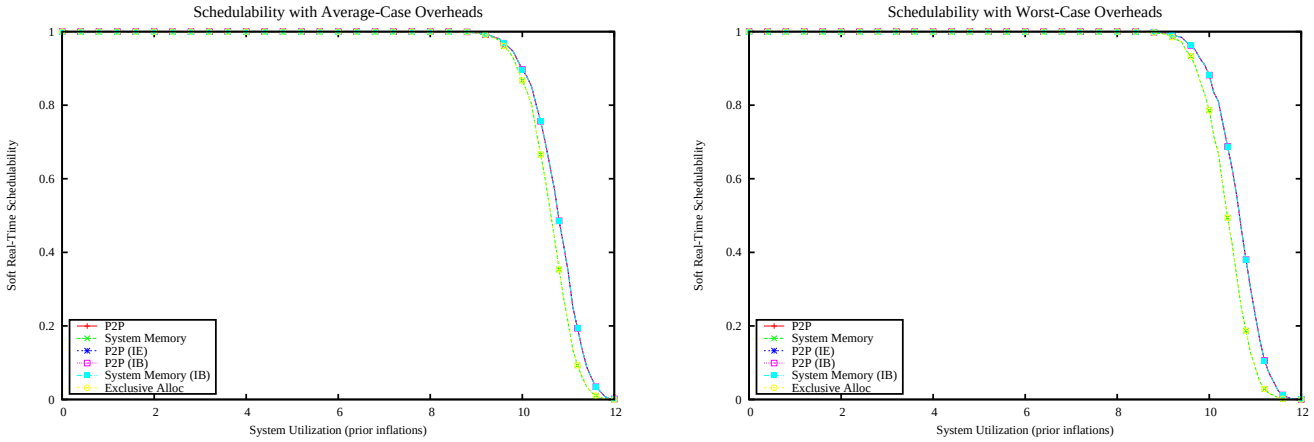

Figure 7443: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

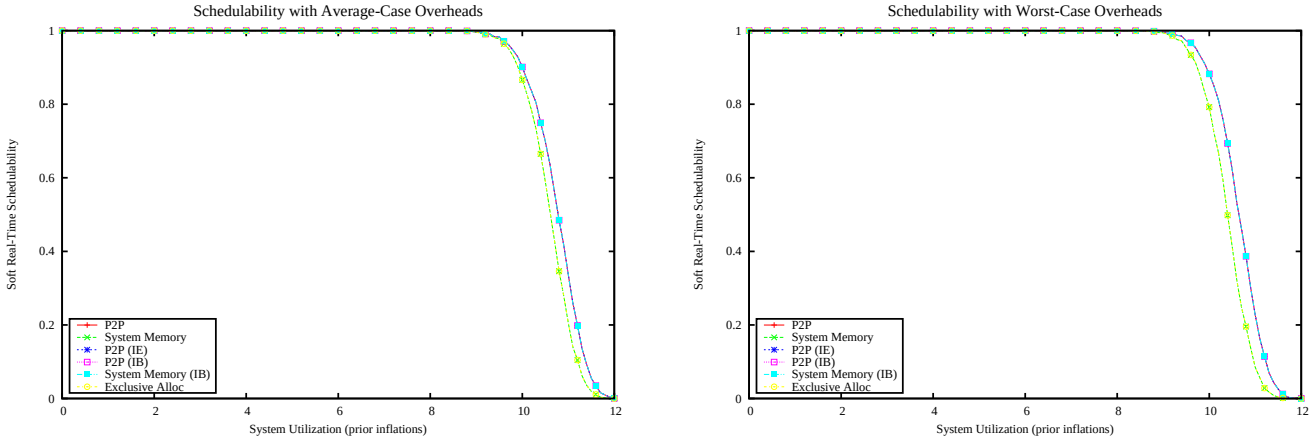

Figure 7444: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

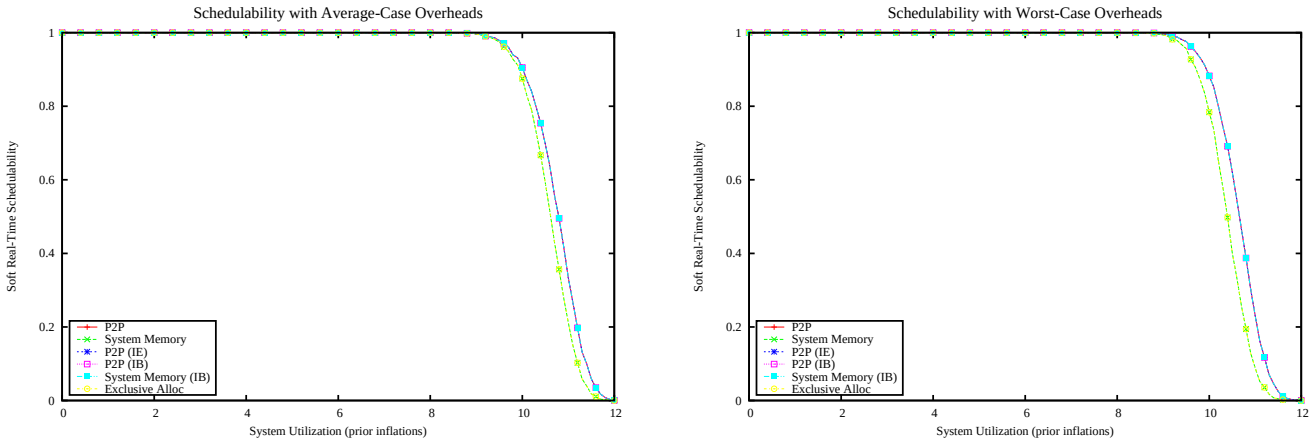

Figure 7445: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

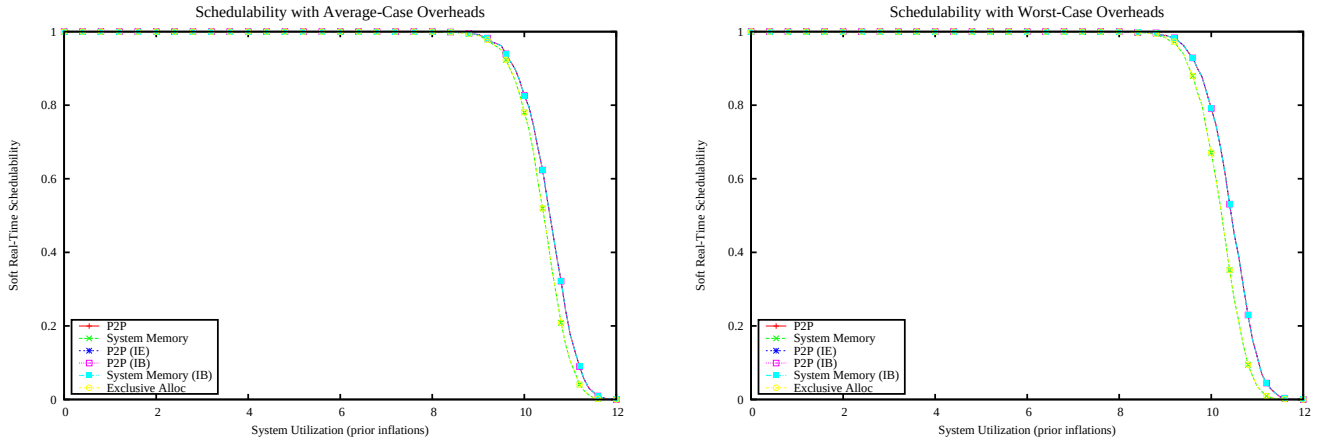

Figure 7446: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

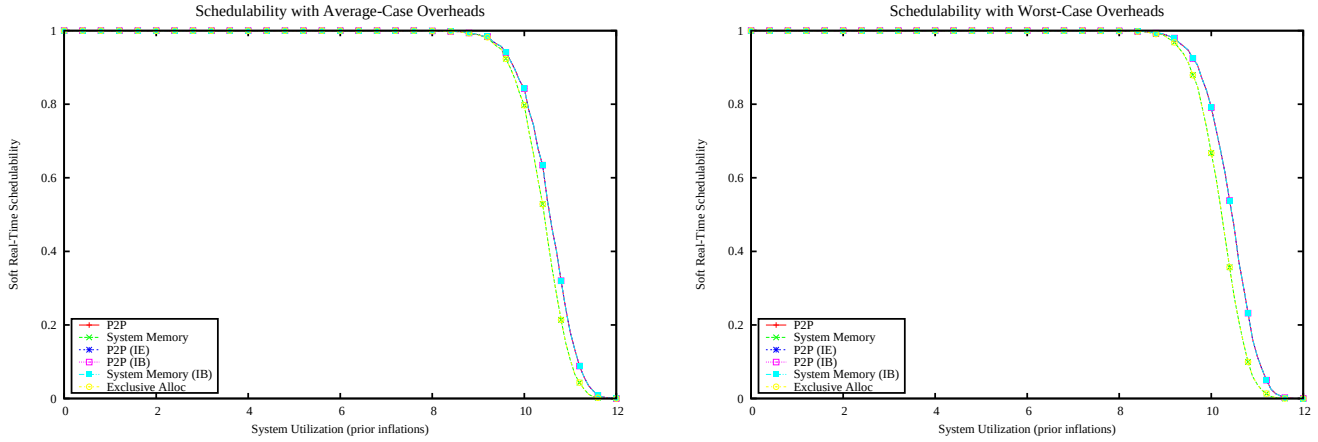

Figure 7447: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

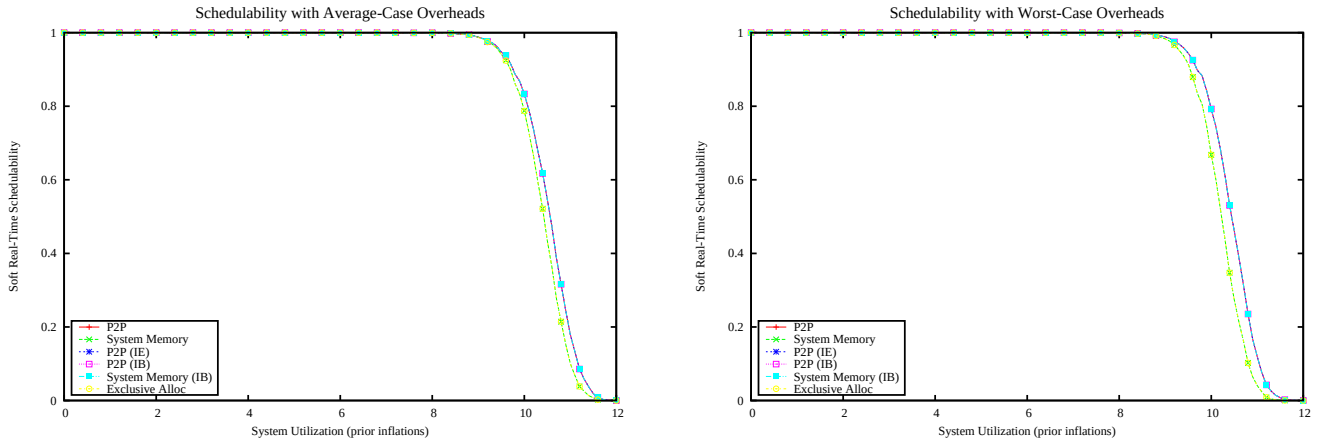

Figure 7448: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

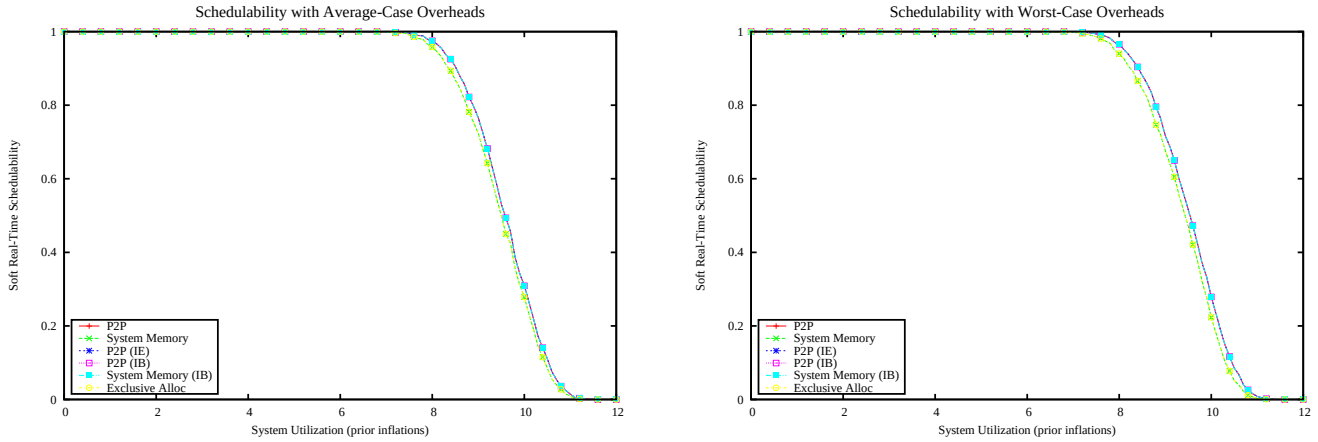

Figure 7449: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

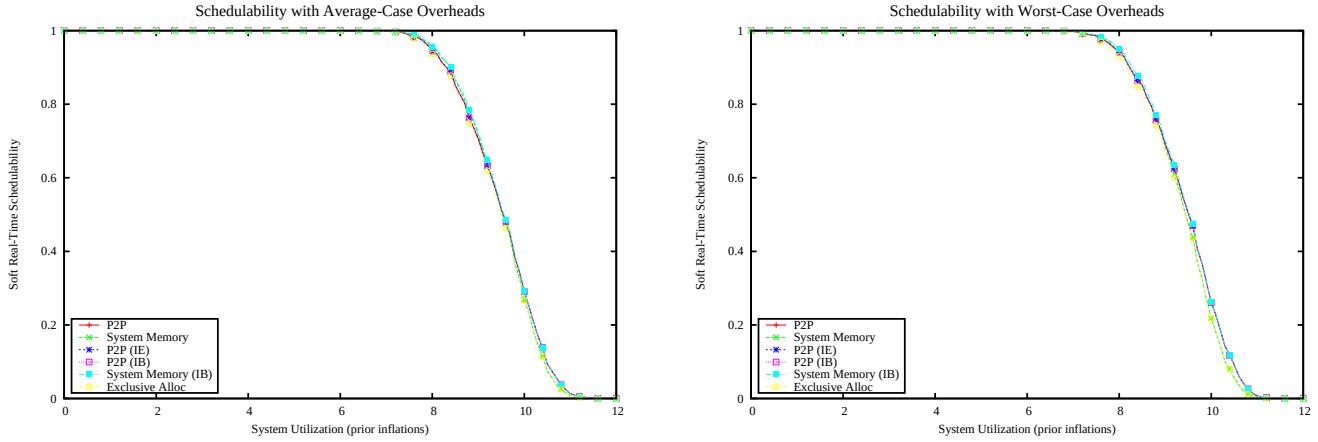

Figure 7450: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

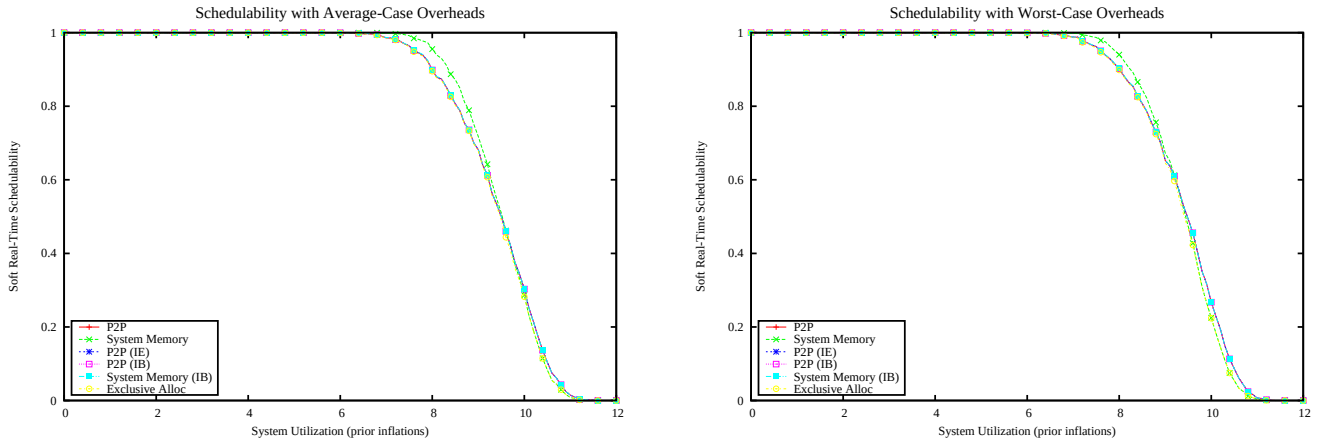

Figure 7451: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

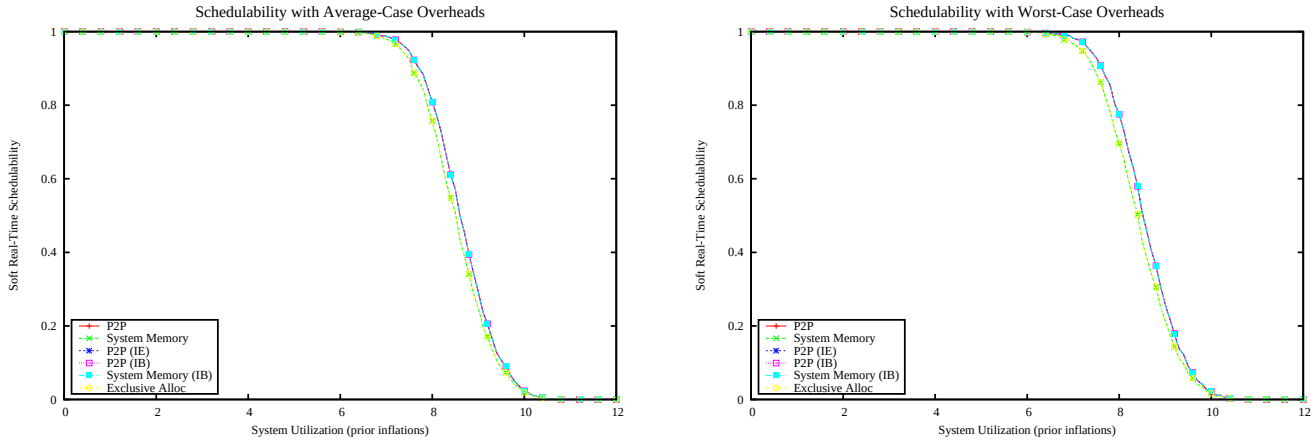

Figure 7452: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

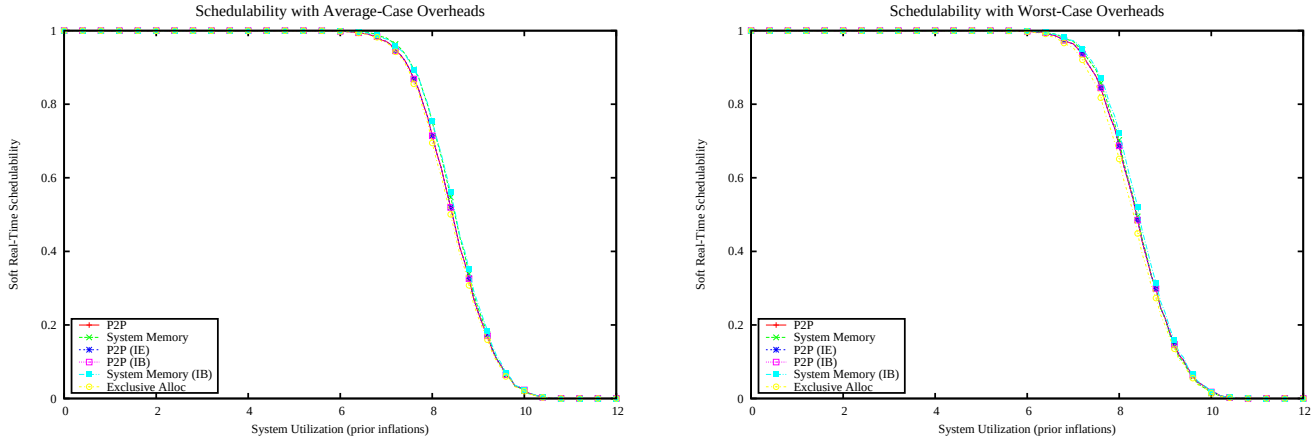

Figure 7453: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

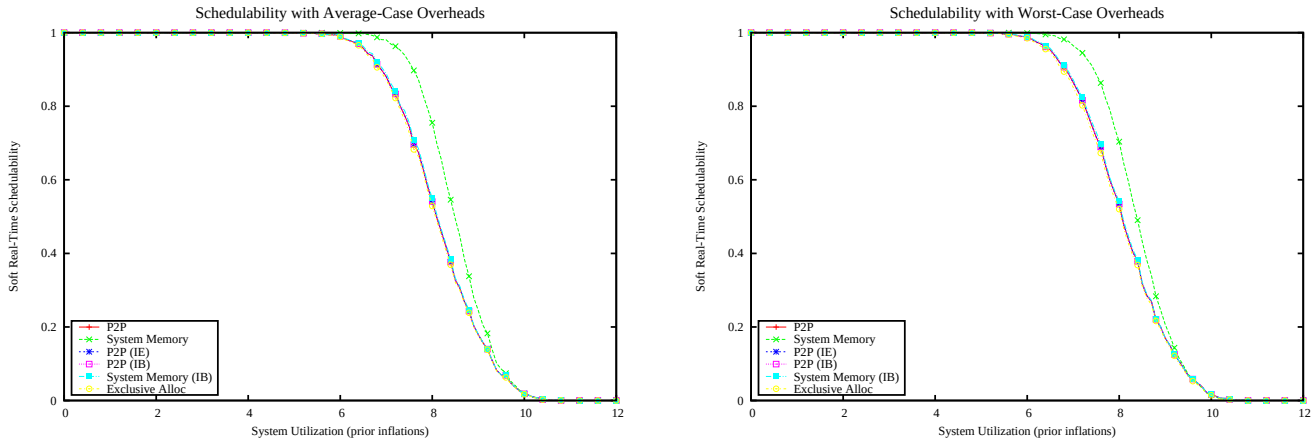

Figure 7454: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

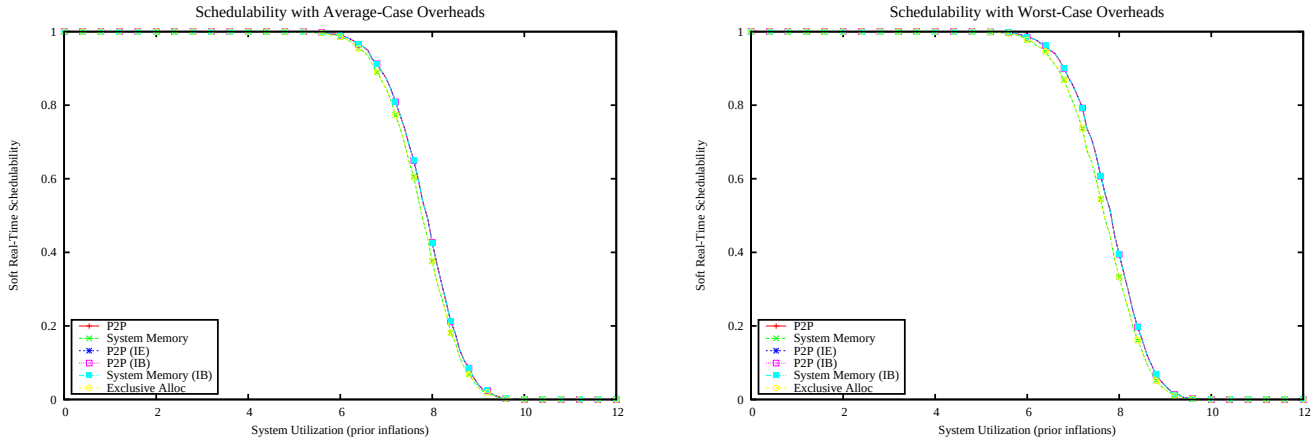

Figure 7455: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

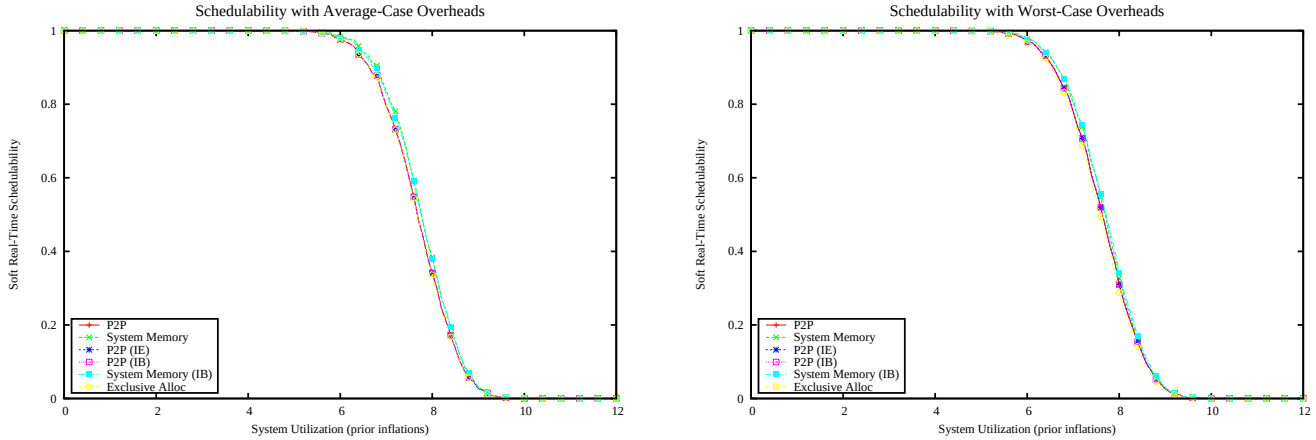

Figure 7456: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

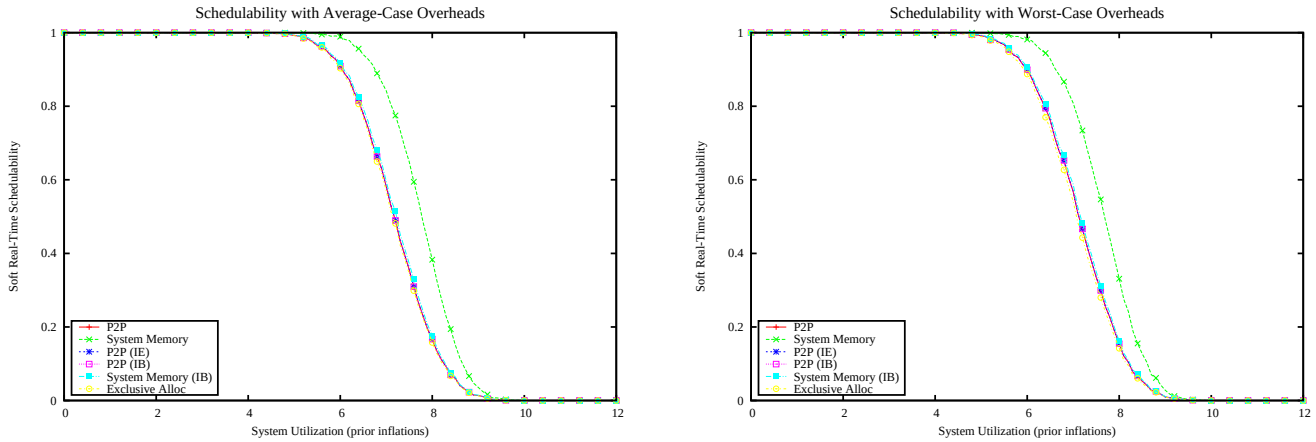

Figure 7457: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

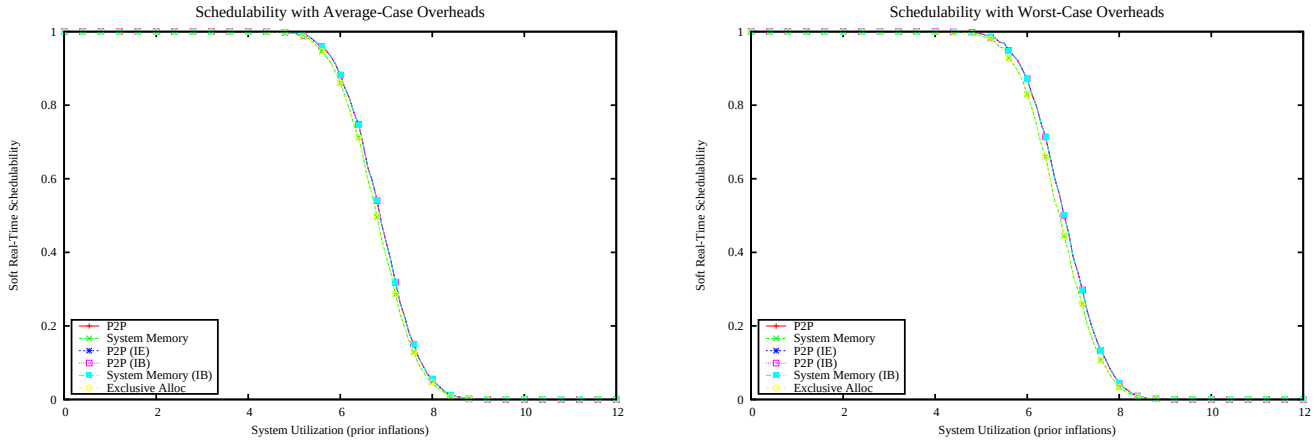

Figure 7458: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

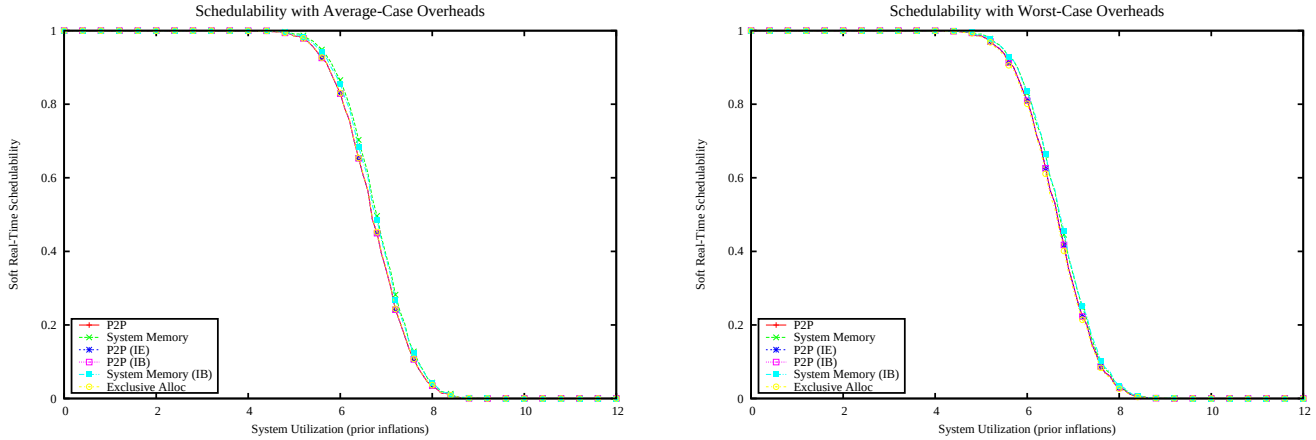

Figure 7459: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

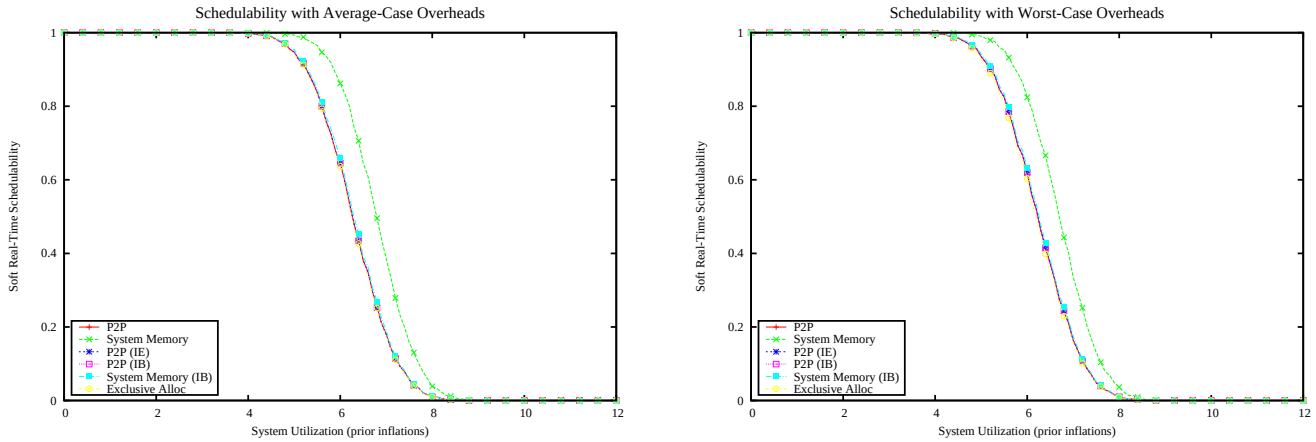

Figure 7460: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

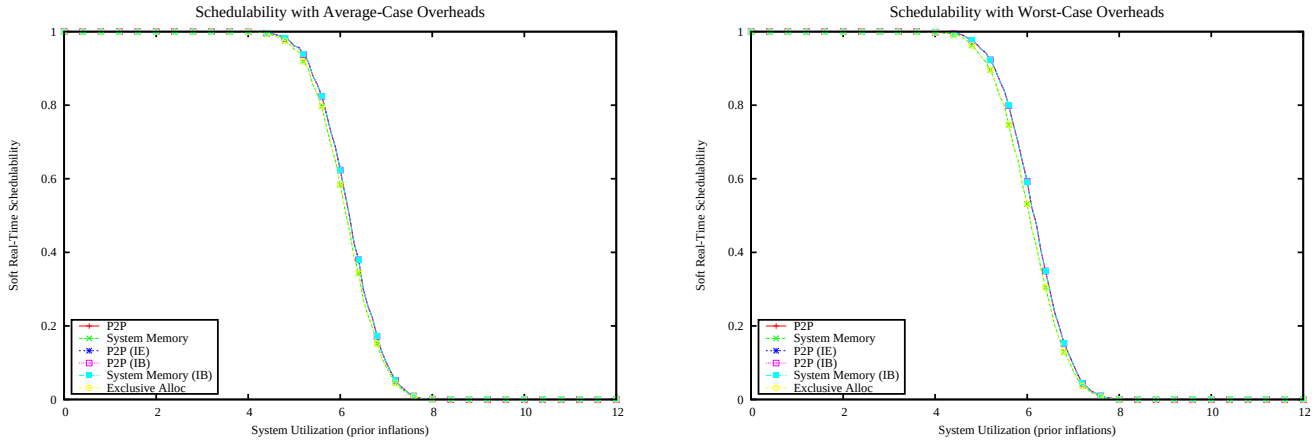

Figure 7461: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

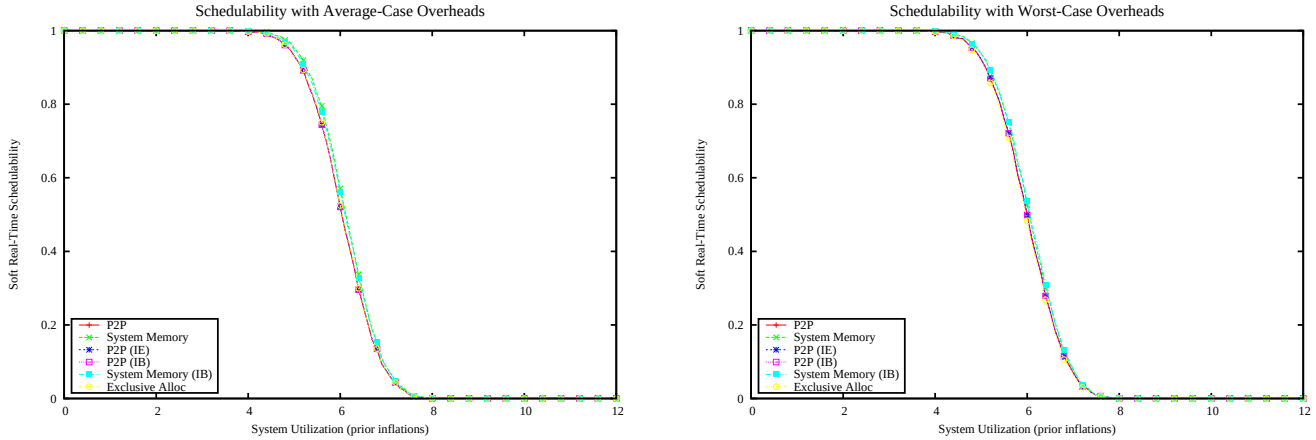

Figure 7462: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

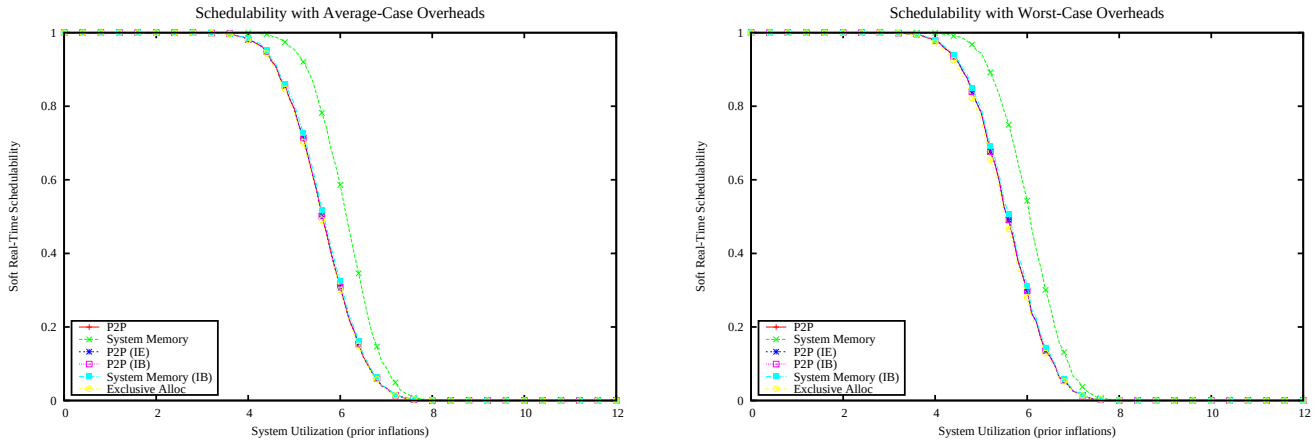

Figure 7463: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

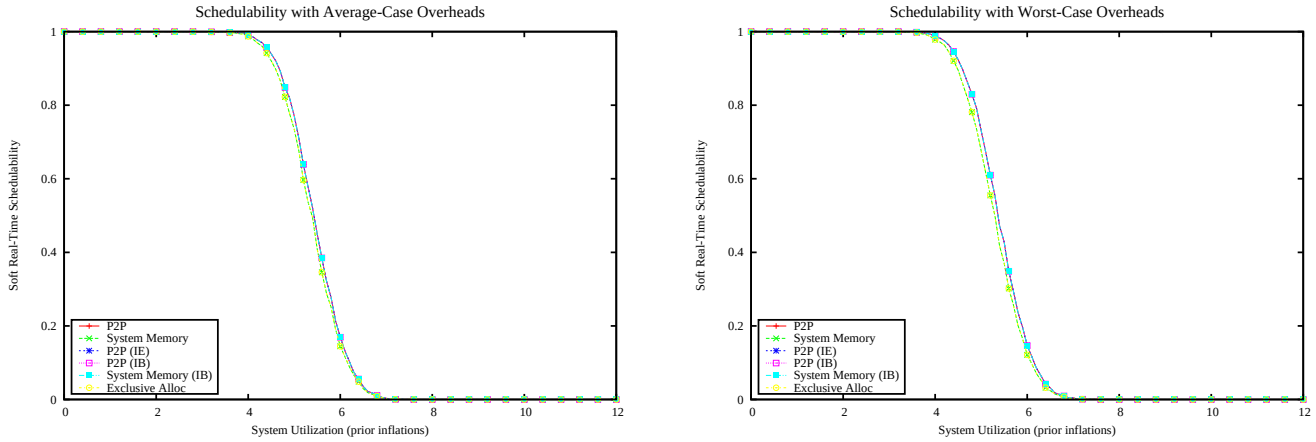

Figure 7464: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

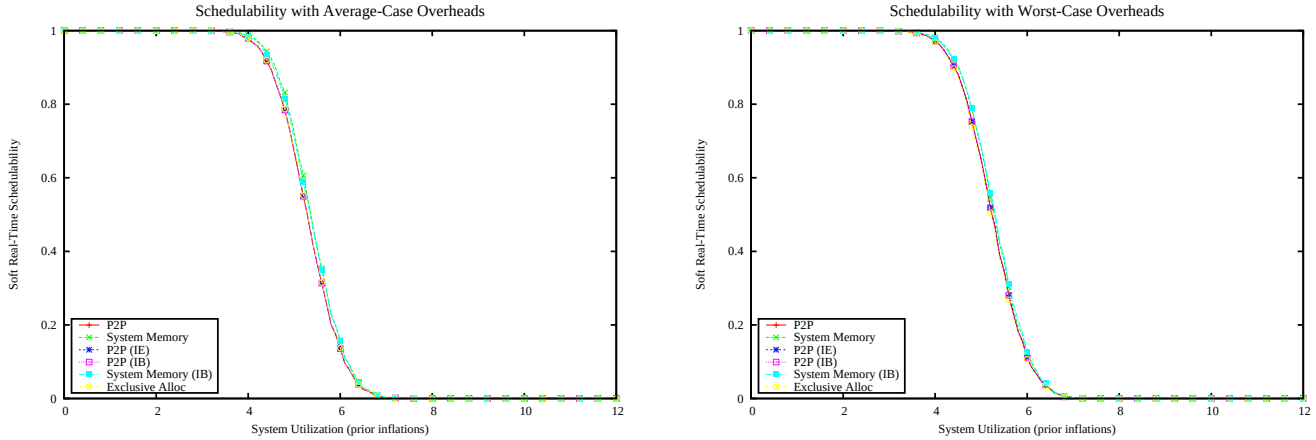

Figure 7465: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

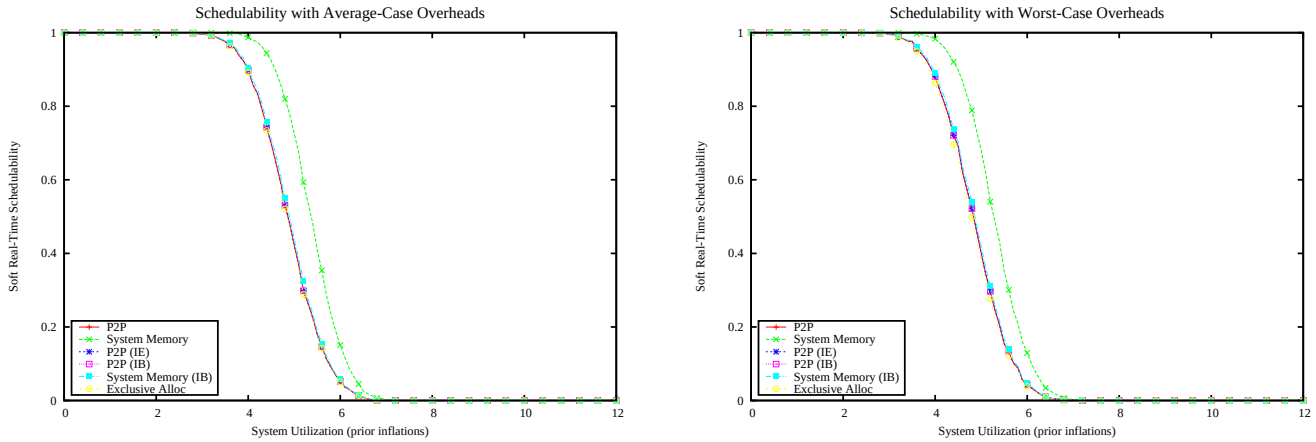

Figure 7466: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [75%, 95%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

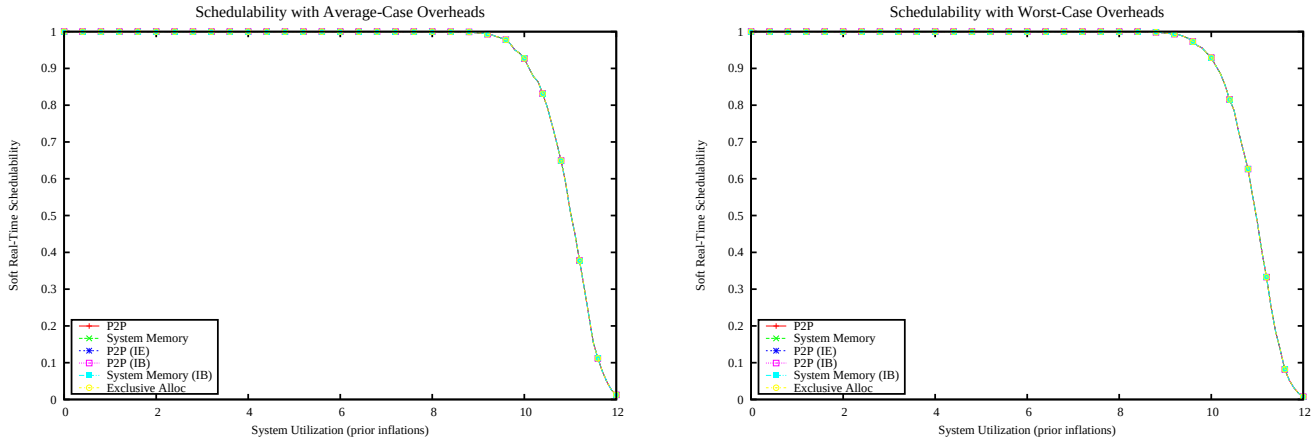

Figure 7467: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

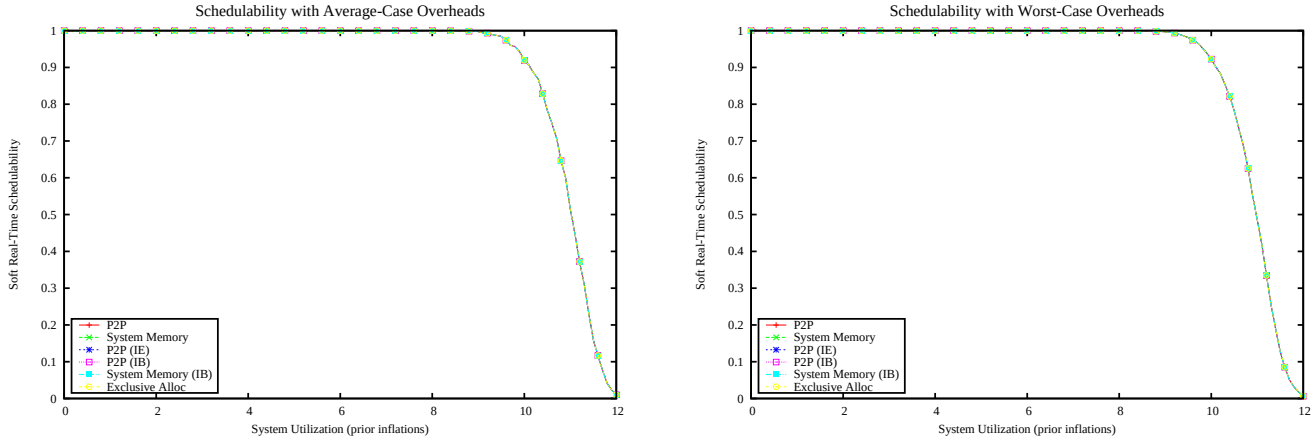

Figure 7468: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

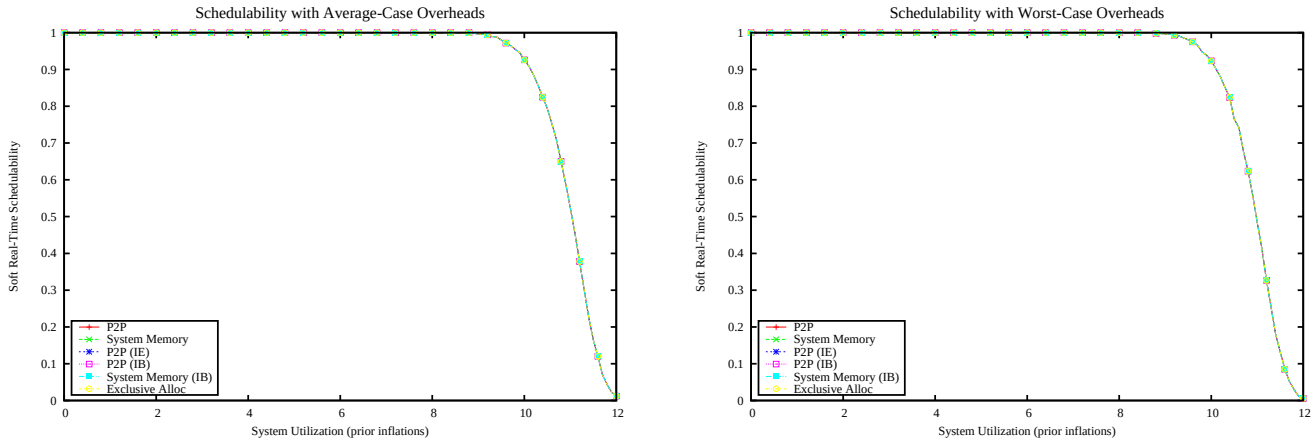

Figure 7469: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

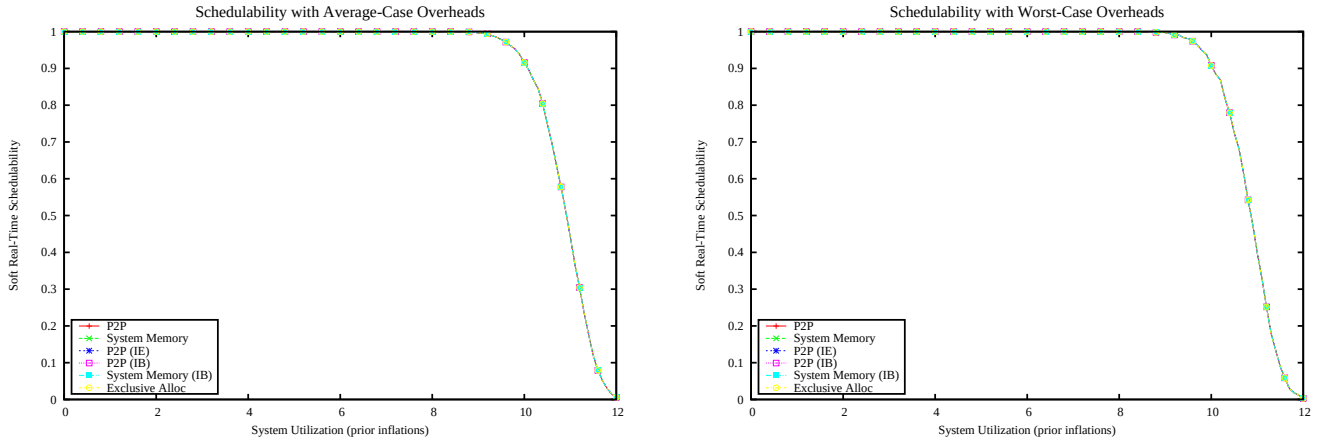

Figure 7470: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

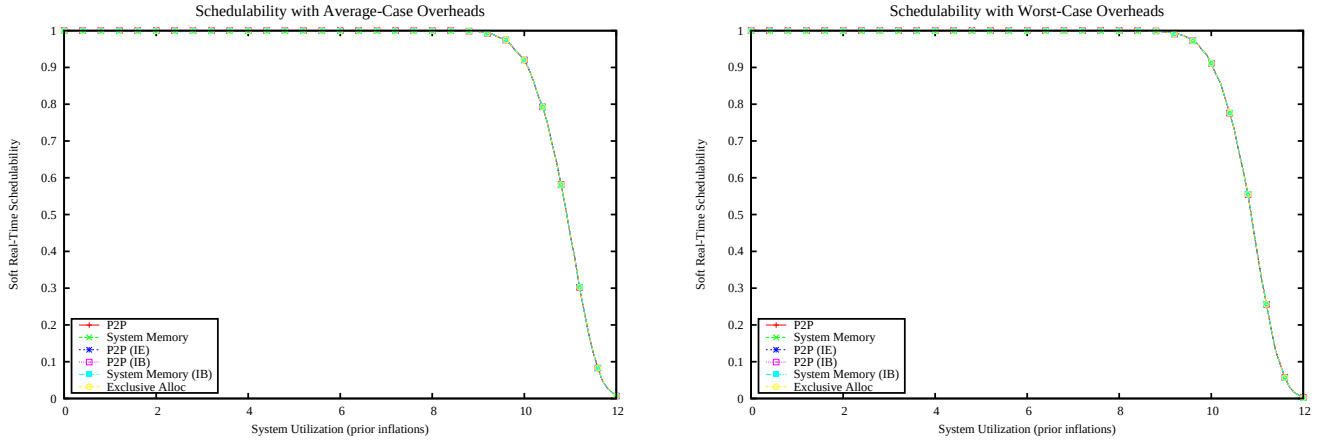

Figure 7471: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

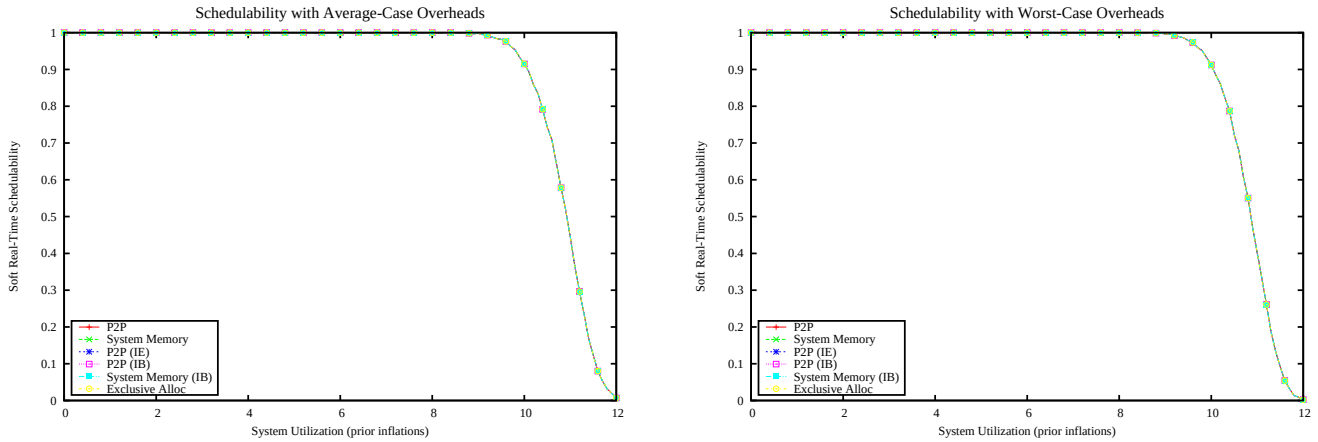

Figure 7472: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

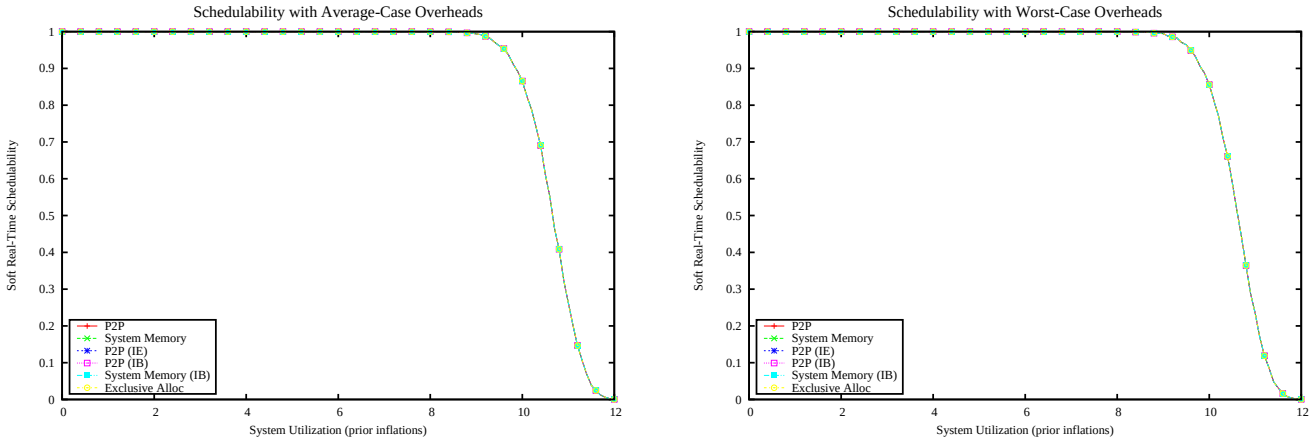

Figure 7473: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

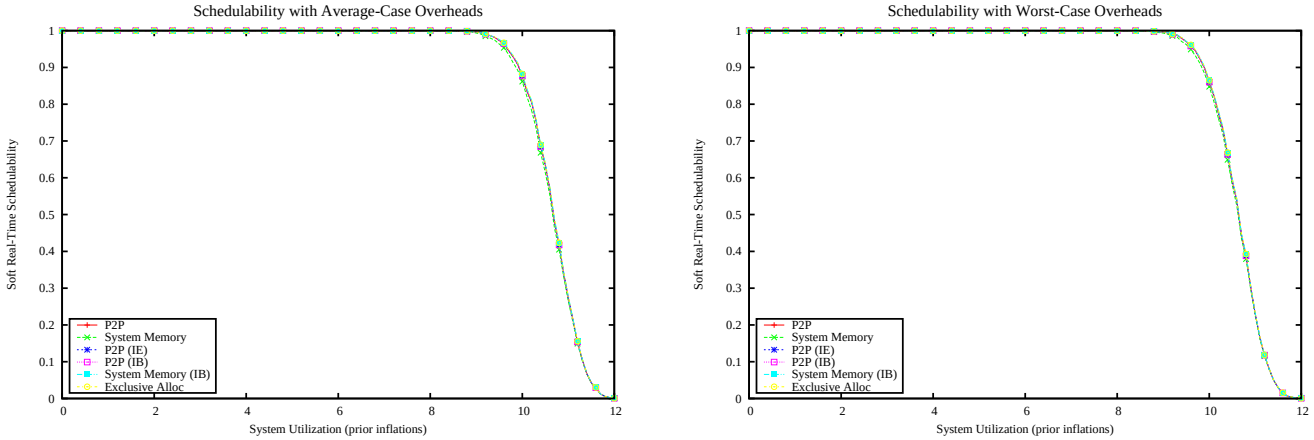

Figure 7474: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

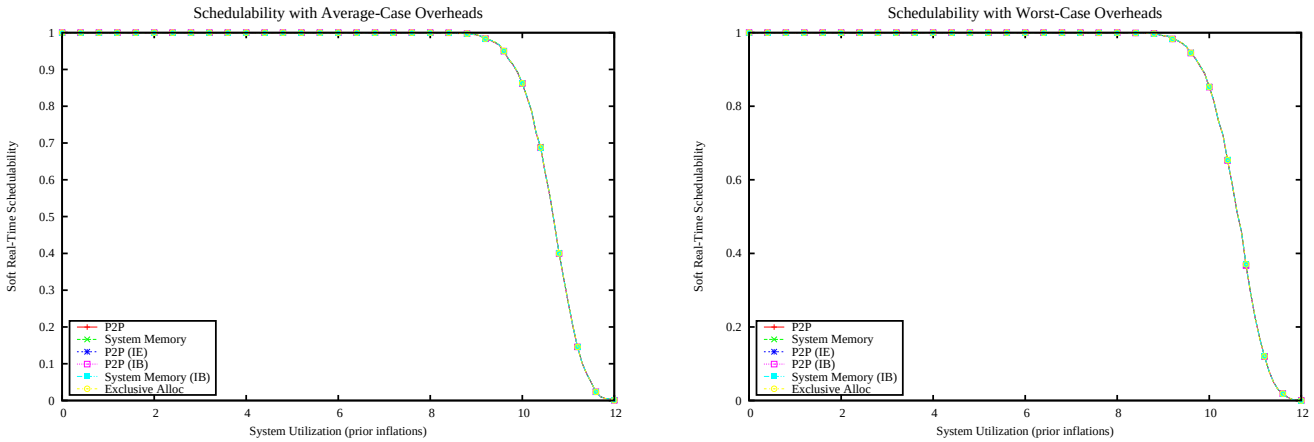

Figure 7475: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

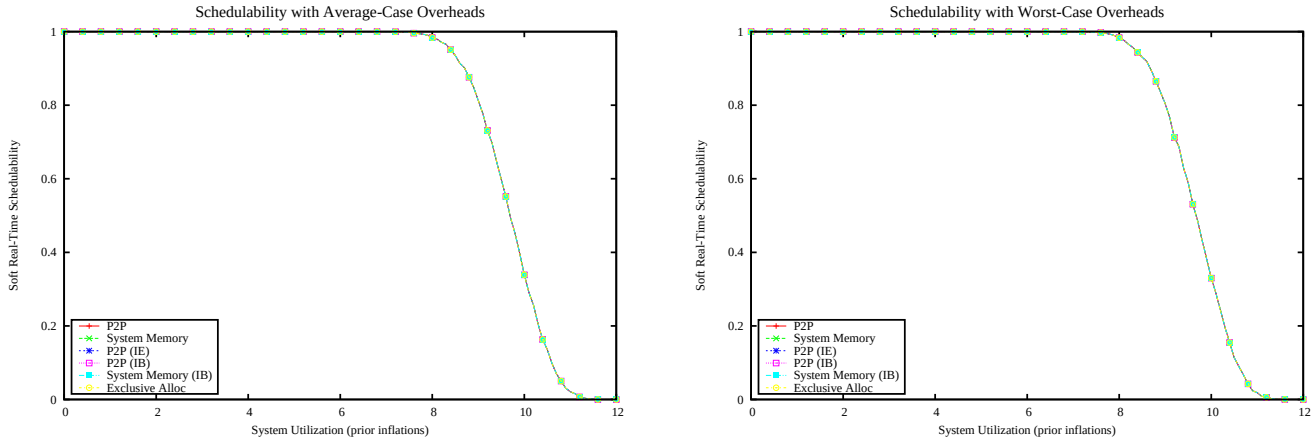

Figure 7476: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

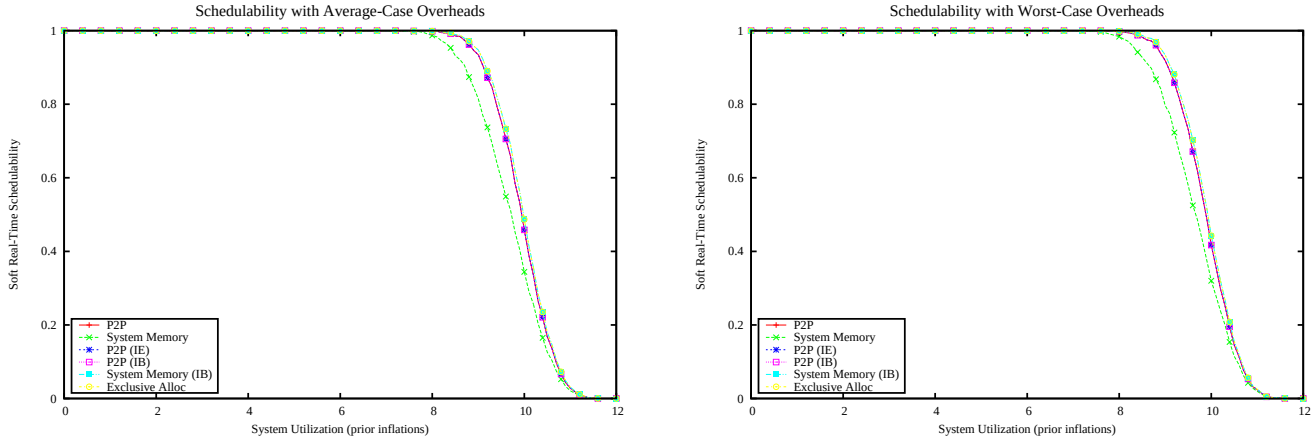

Figure 7477: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

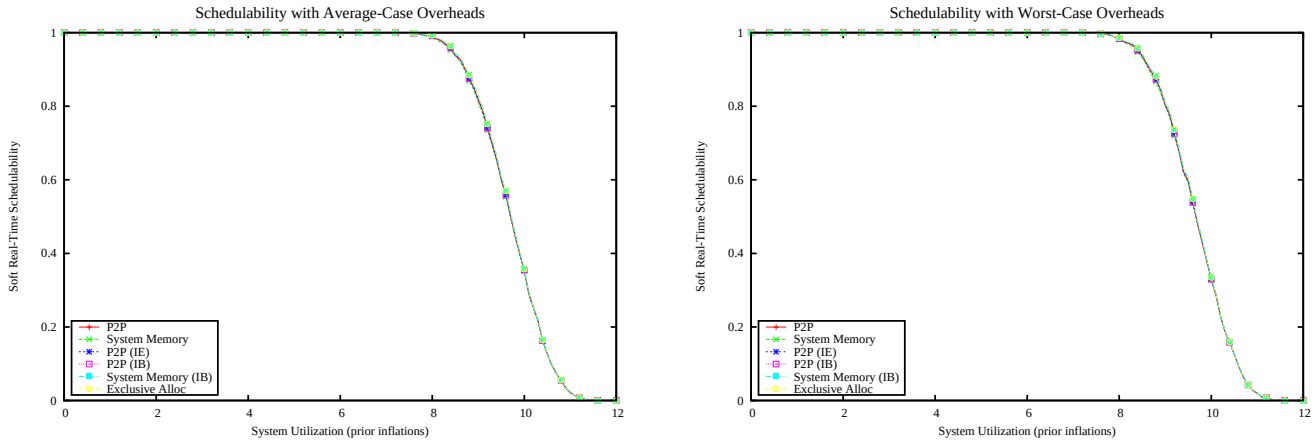

Figure 7478: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

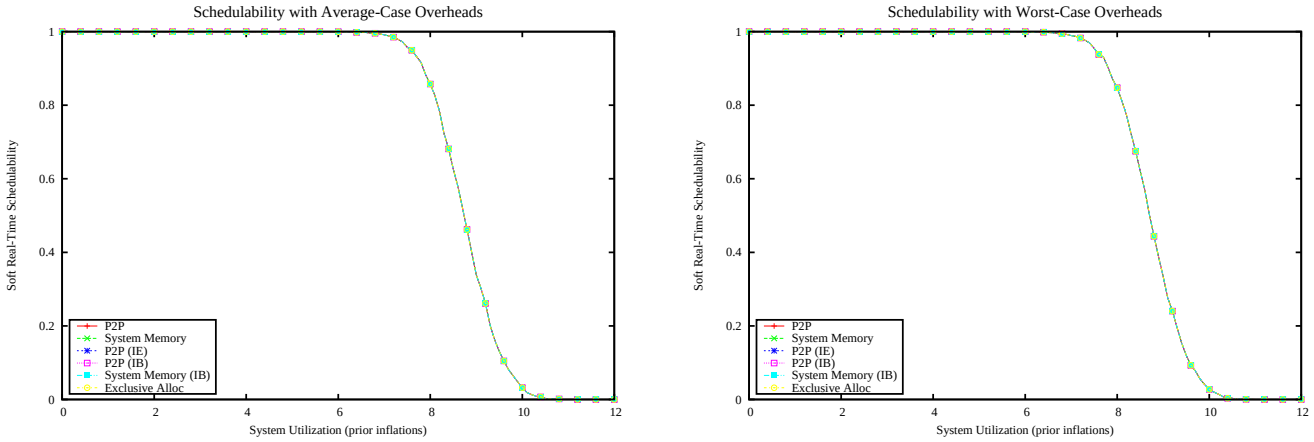

Figure 7479: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

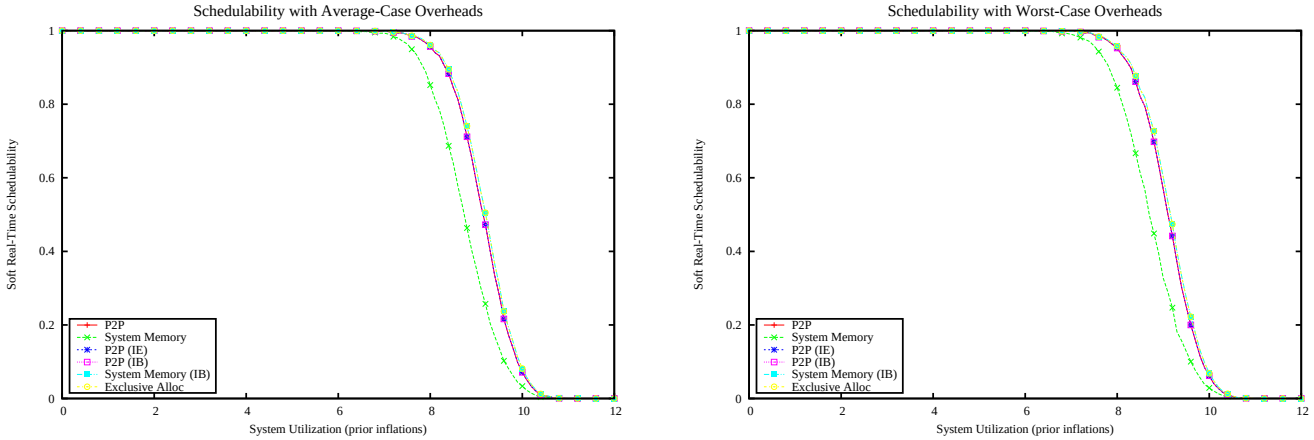

Figure 7480: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

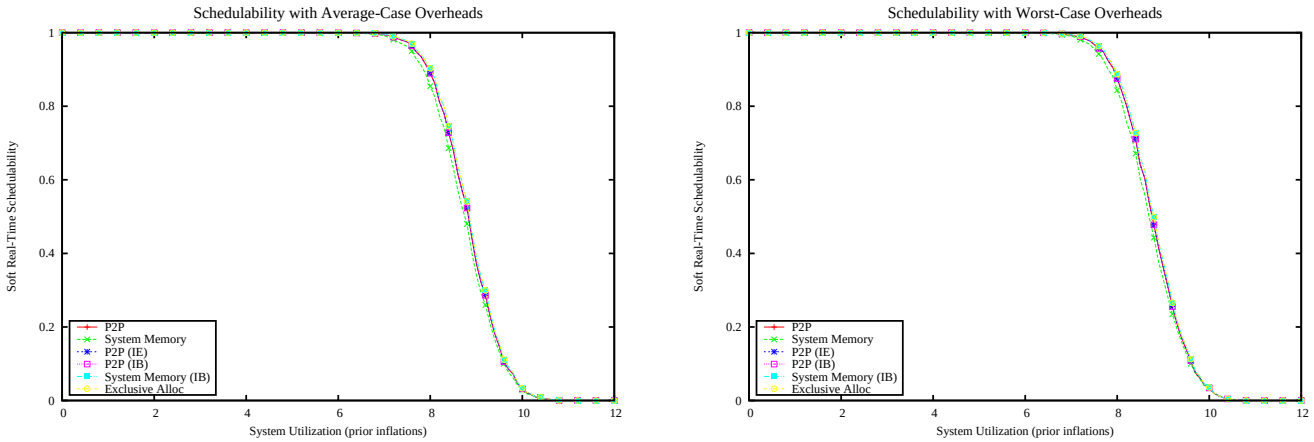

Figure 7481: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

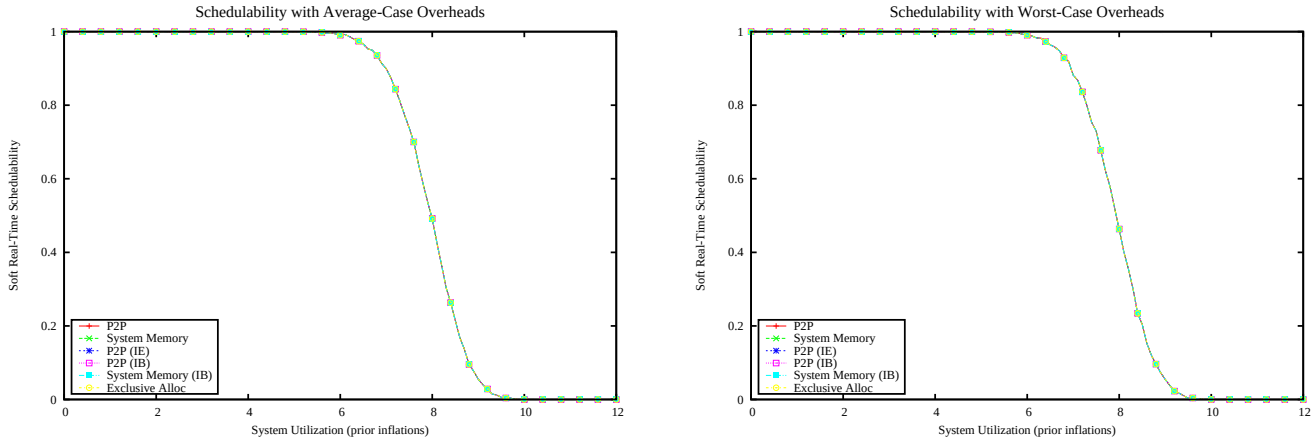

Figure 7482: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

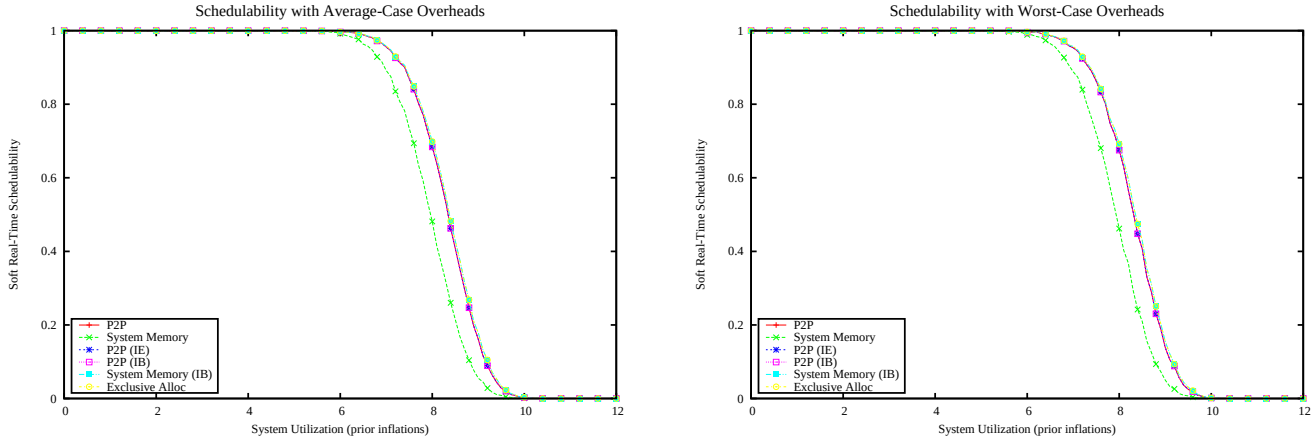

Figure 7483: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

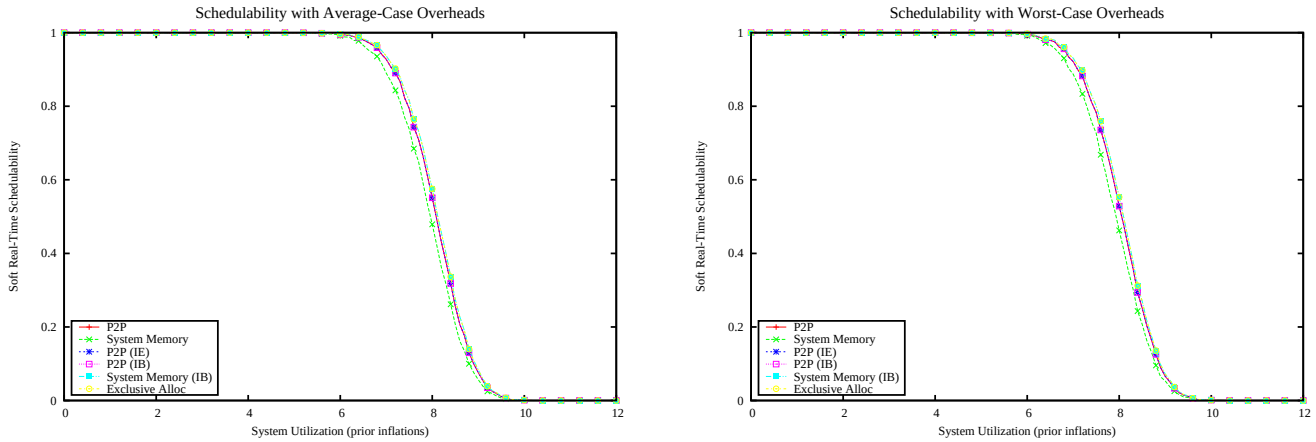

Figure 7484: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

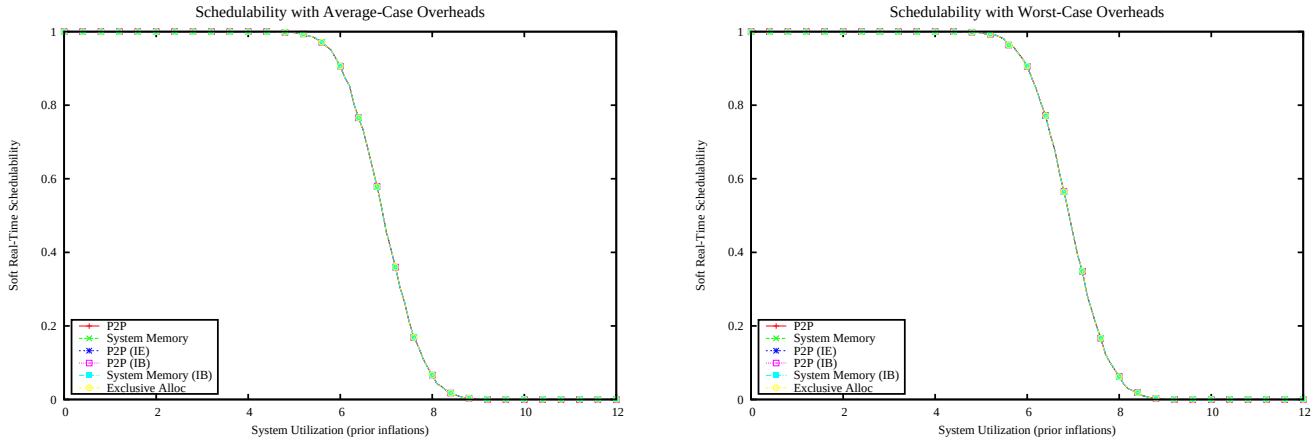

Figure 7485: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

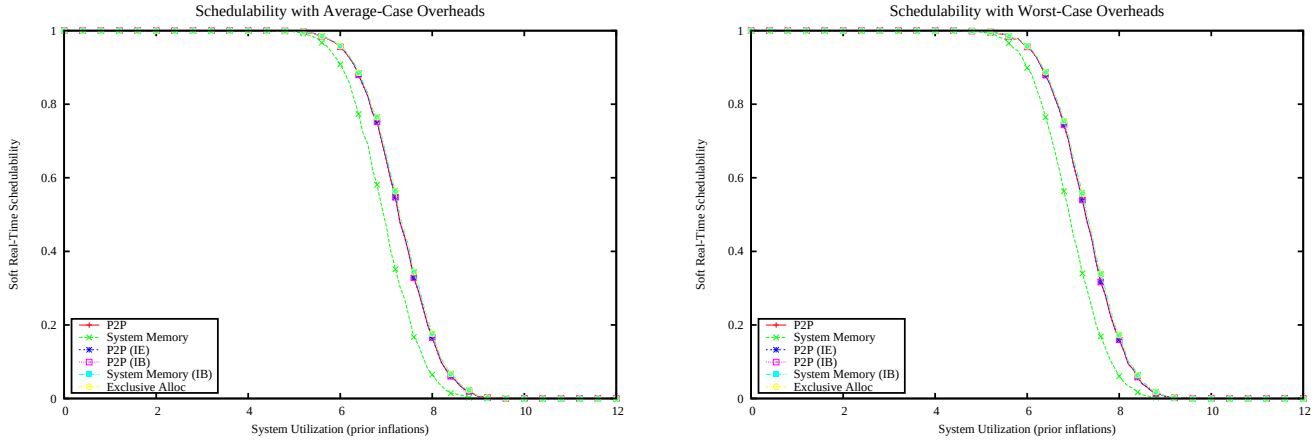

Figure 7486: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

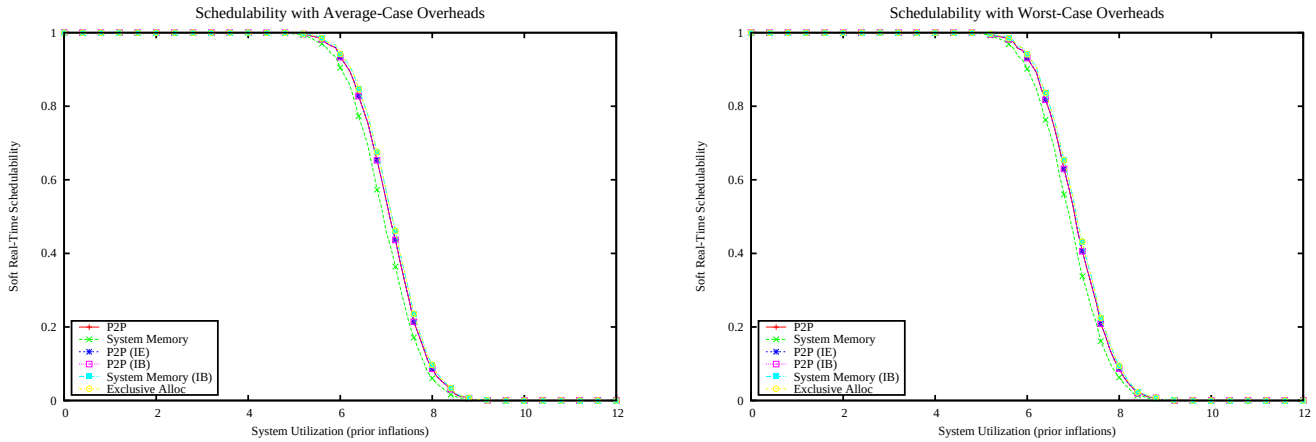

Figure 7487: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

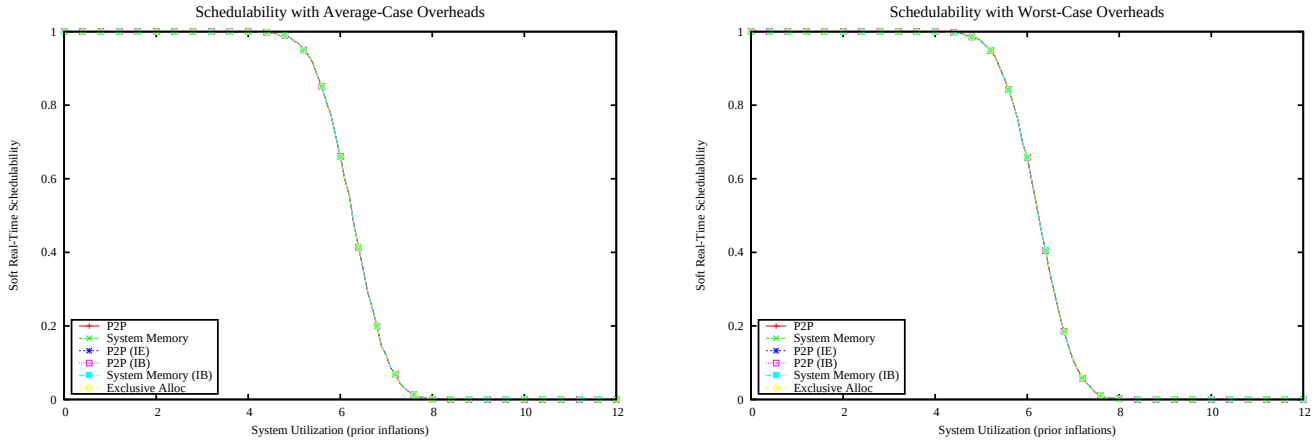

Figure 7488: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

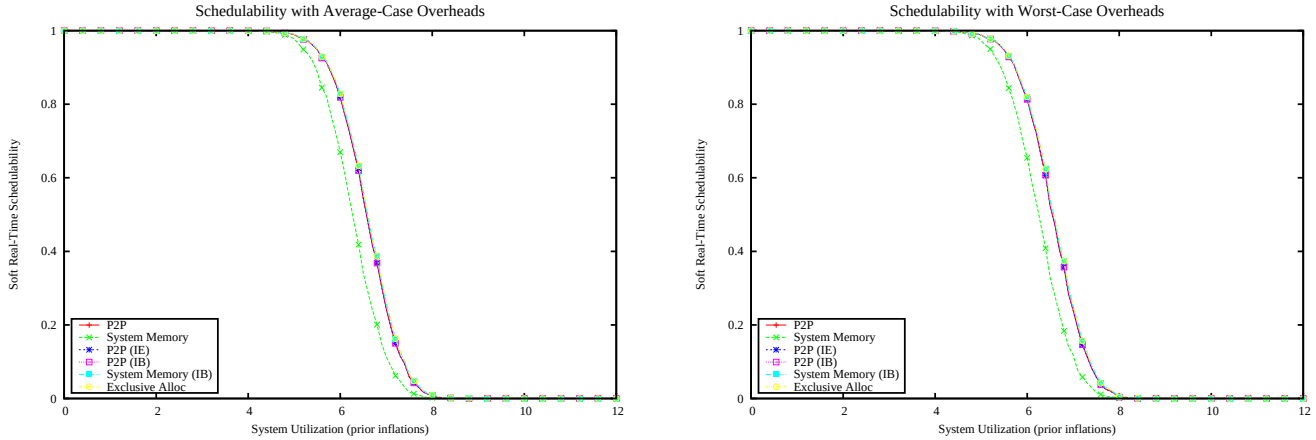

Figure 7489: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

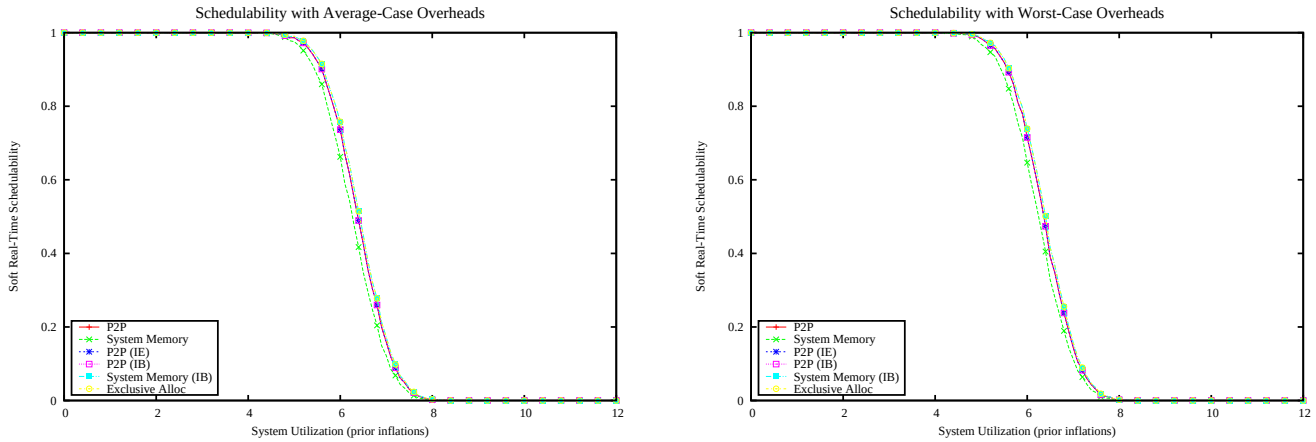

Figure 7490: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

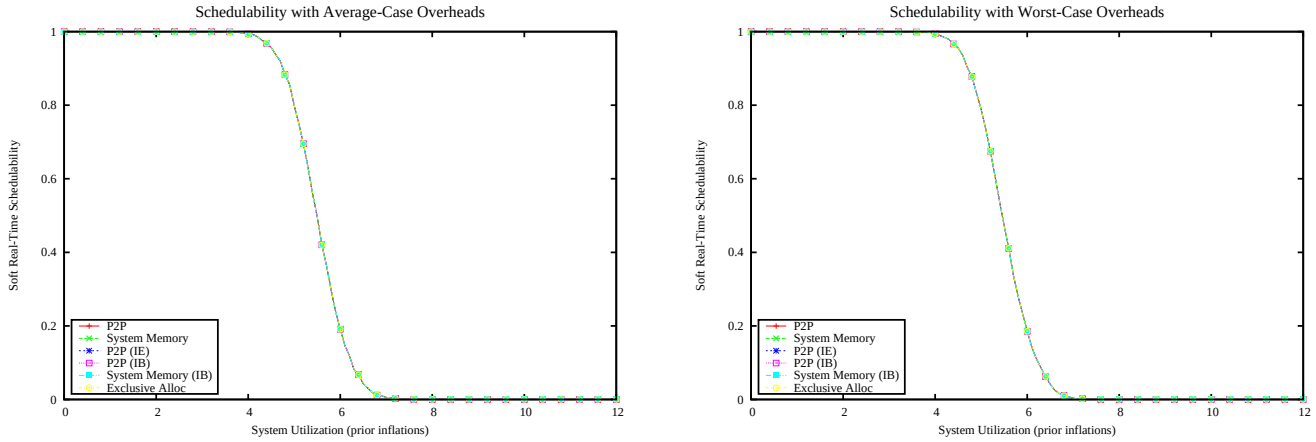

Figure 7491: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

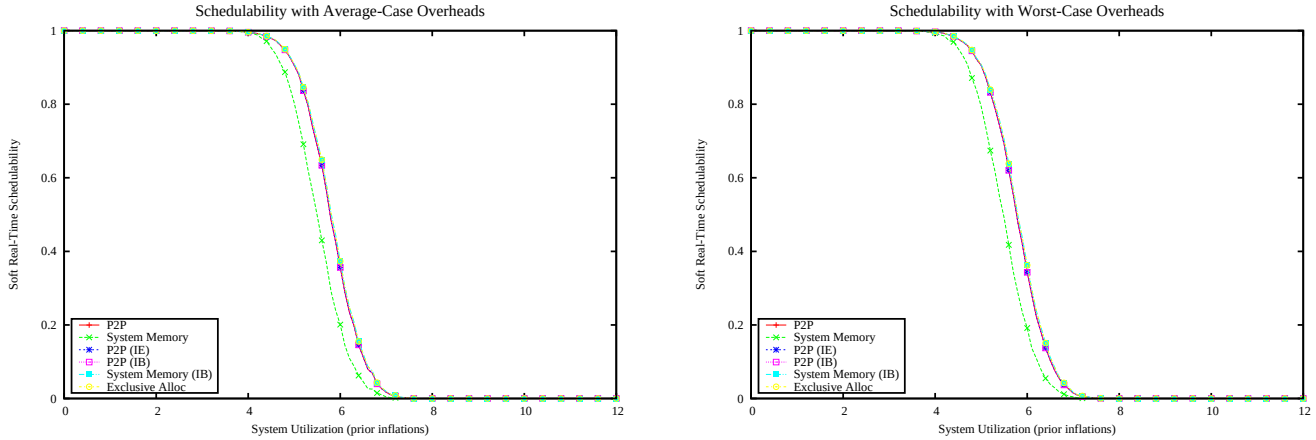

Figure 7492: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

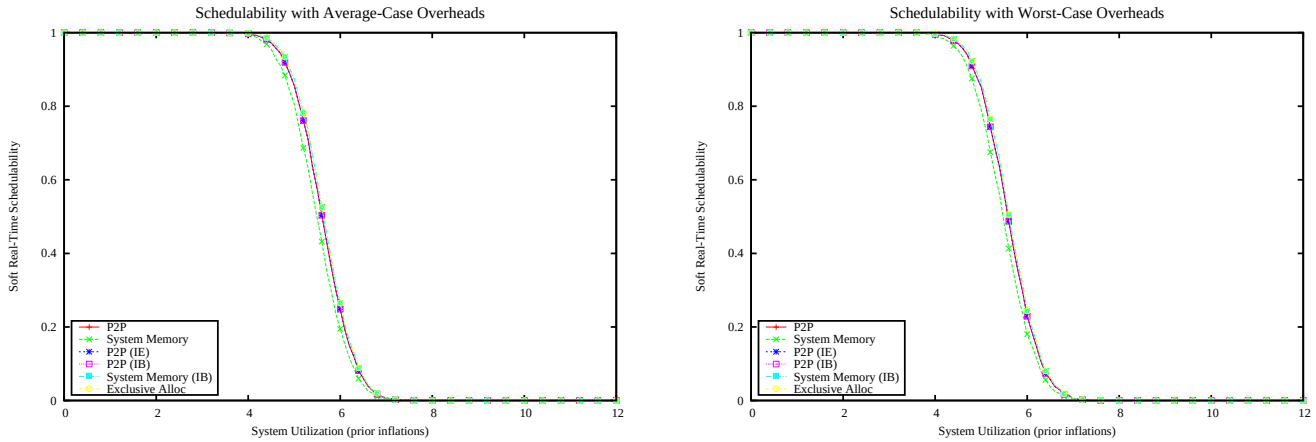

Figure 7493: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

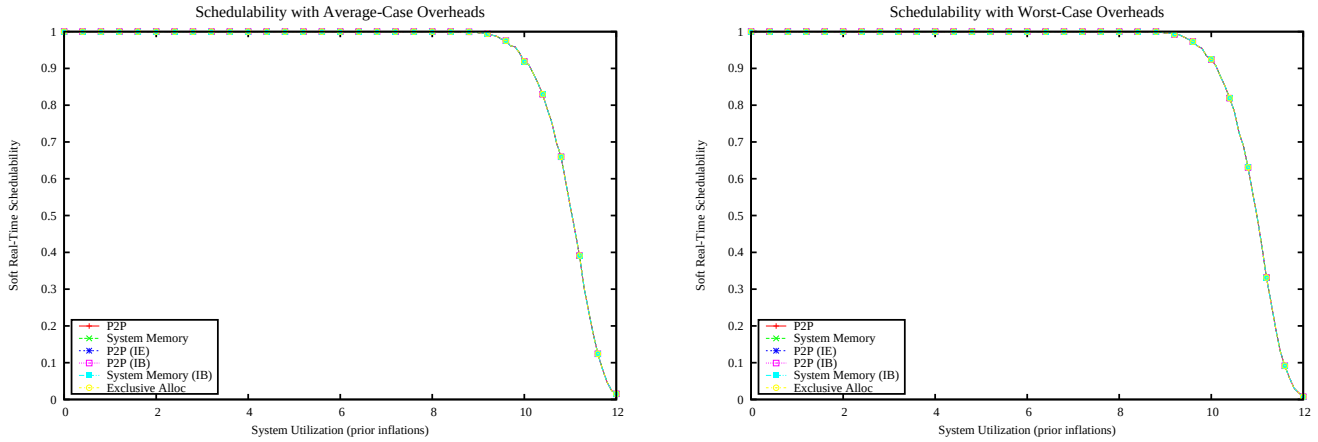

Figure 7494: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

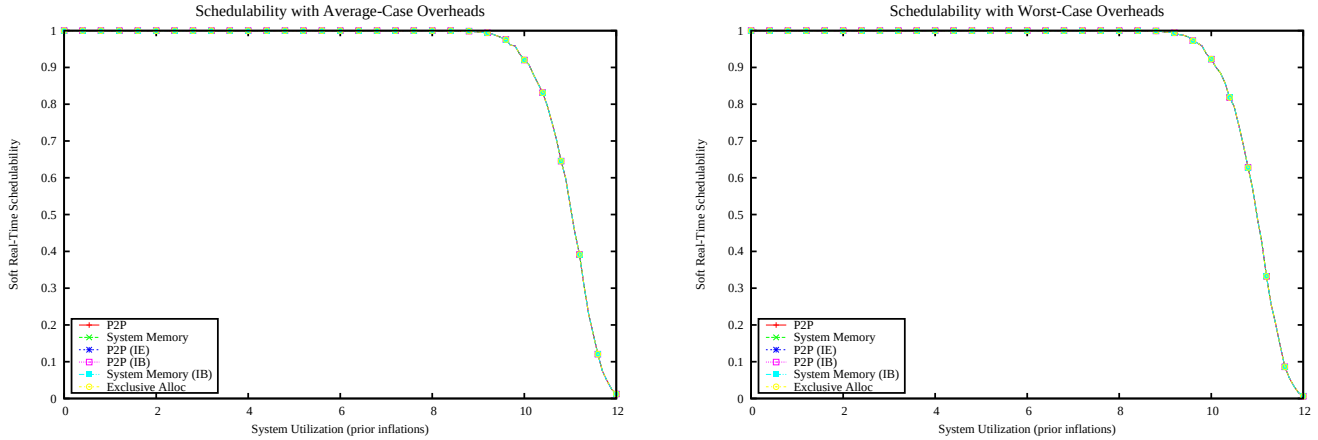

Figure 7495: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

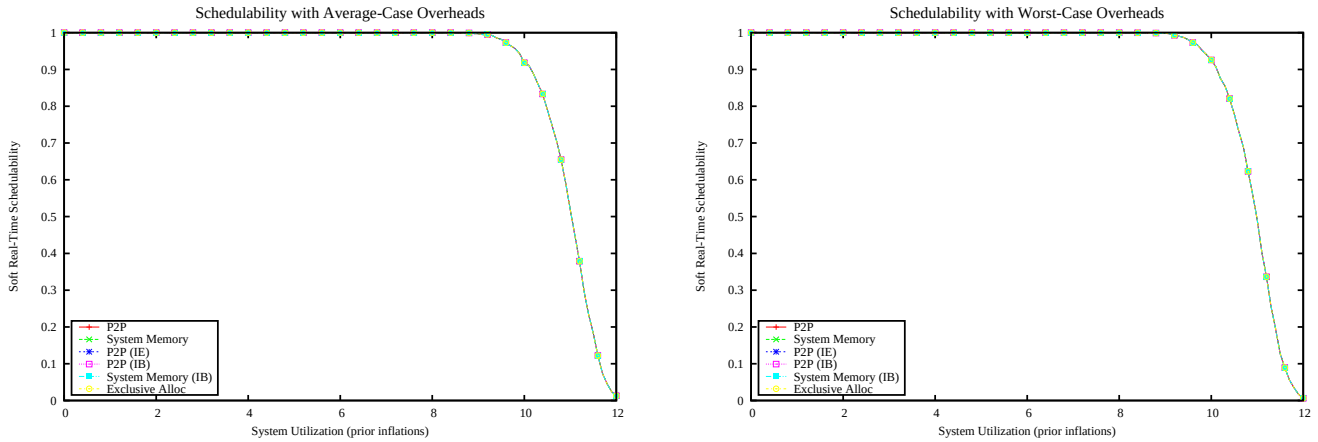

Figure 7496: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

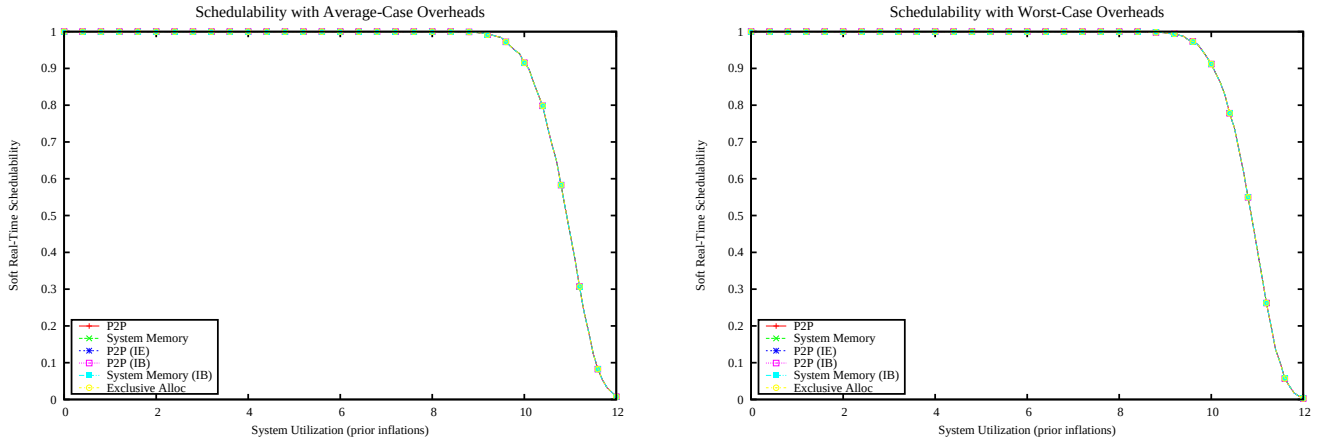

Figure 7497: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

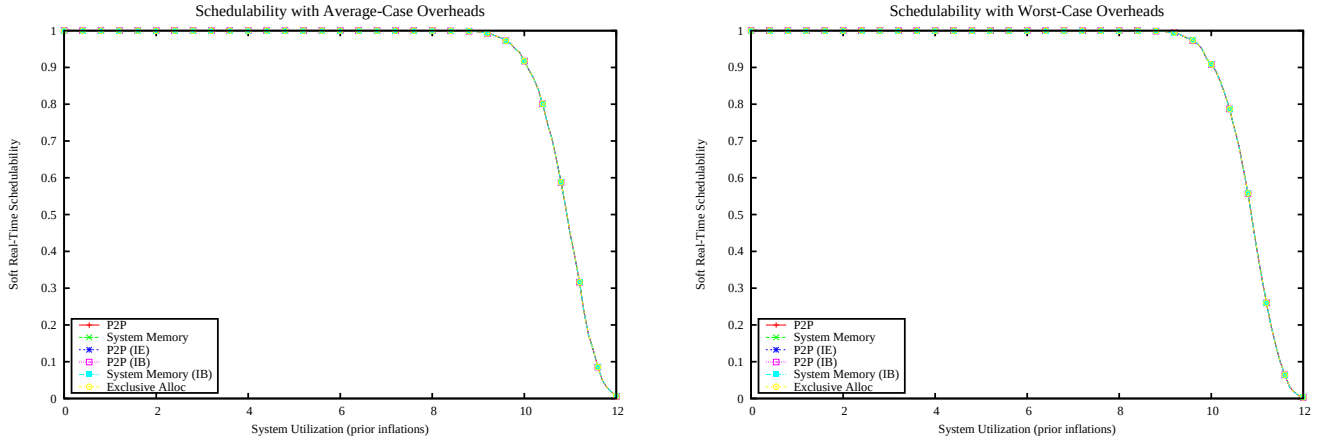

Figure 7498: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

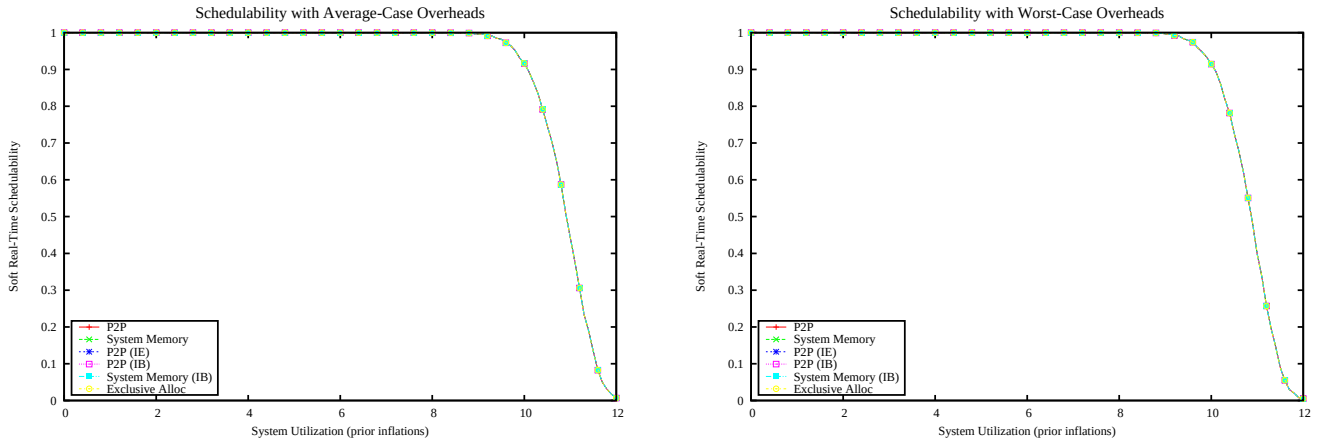

Figure 7499: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

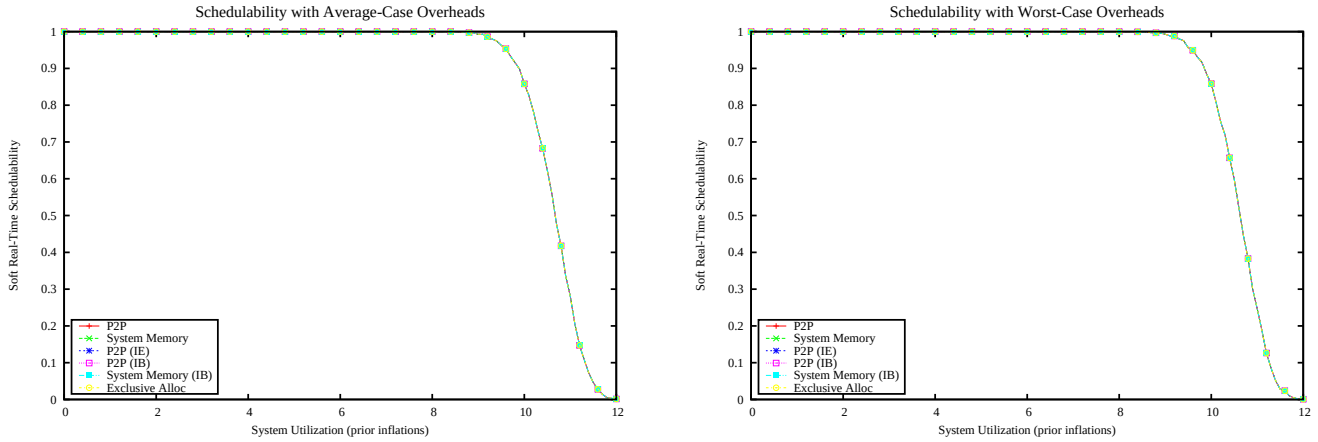

Figure 7500: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

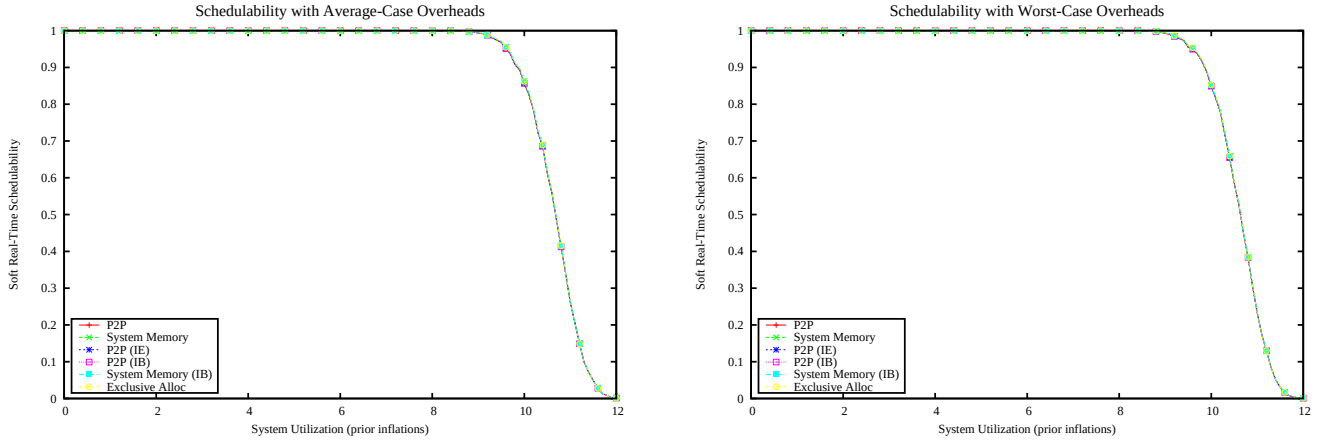

Figure 7501: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

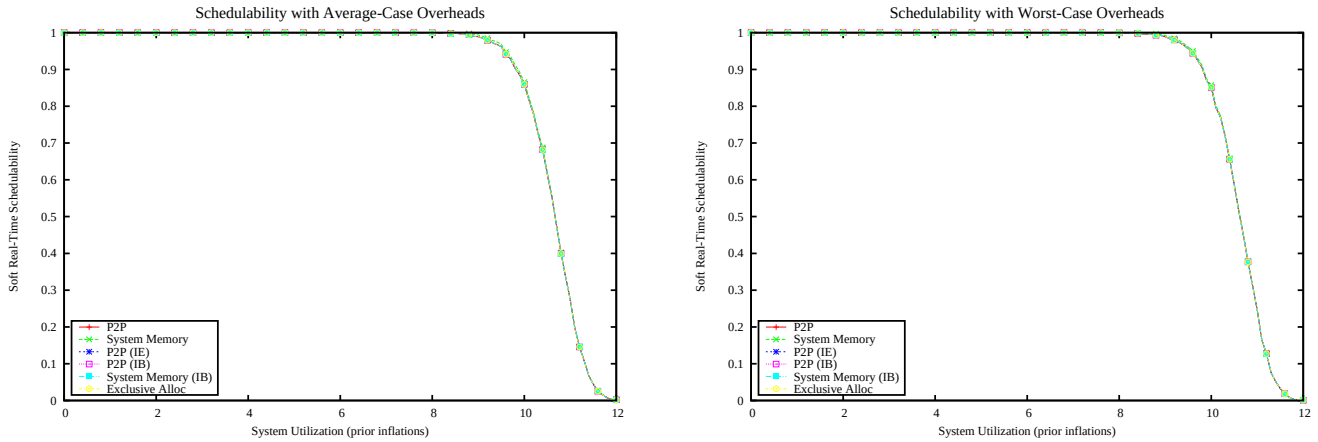

Figure 7502: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

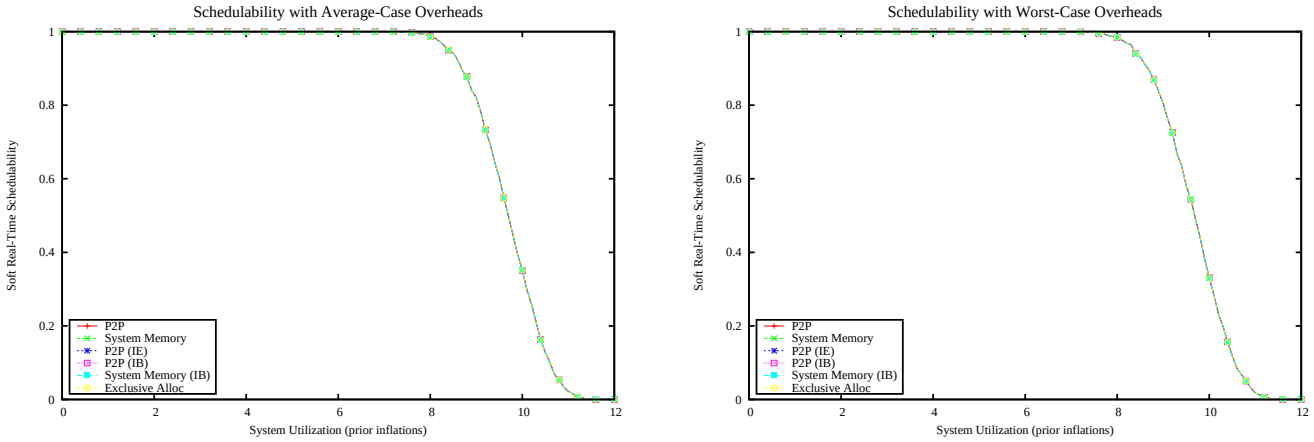

Figure 7503: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

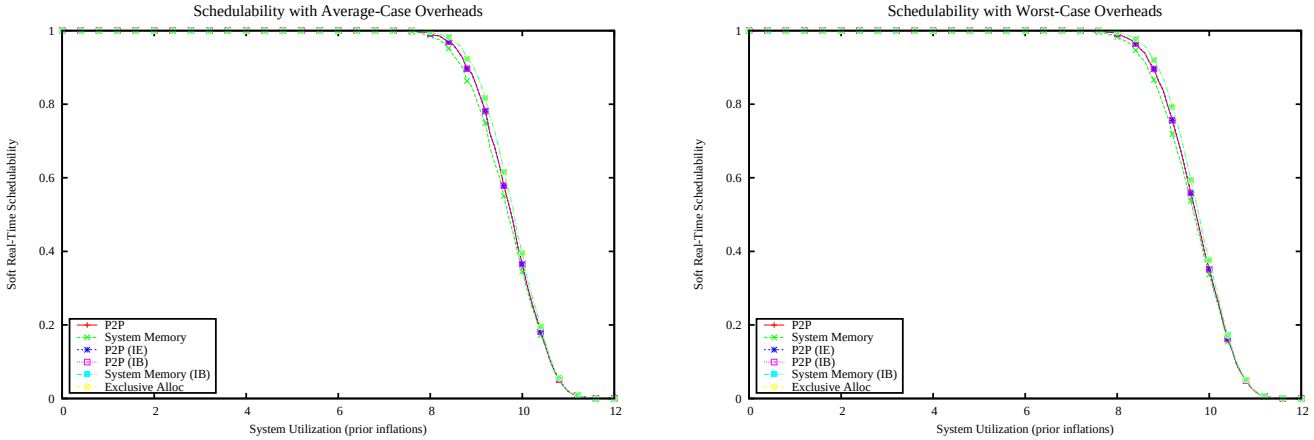

Figure 7504: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

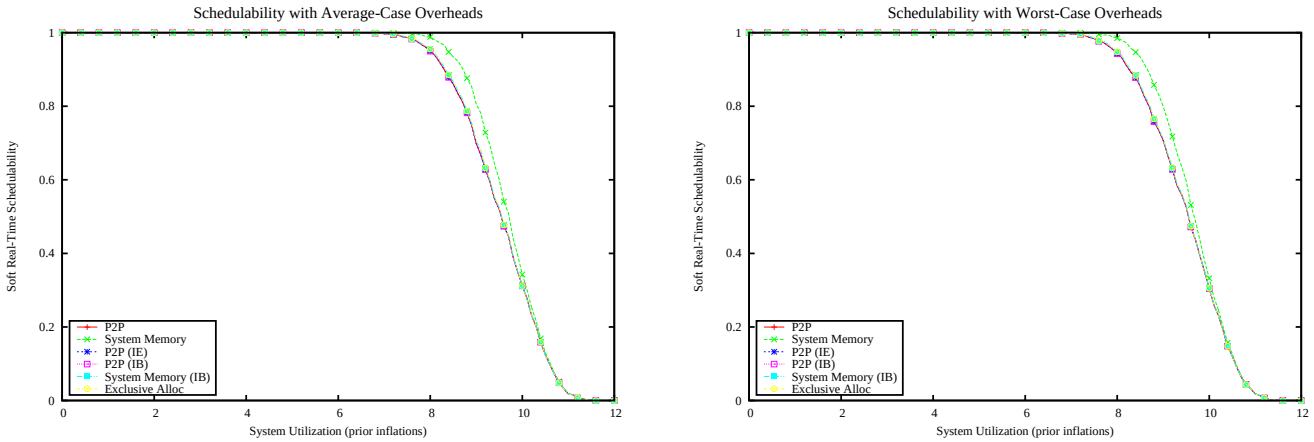

Figure 7505: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

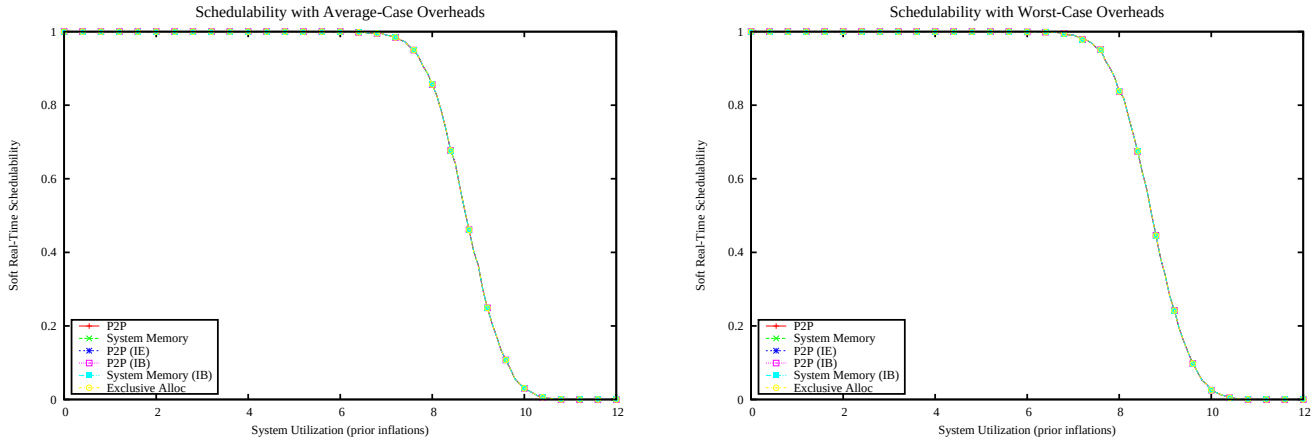

Figure 7506: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

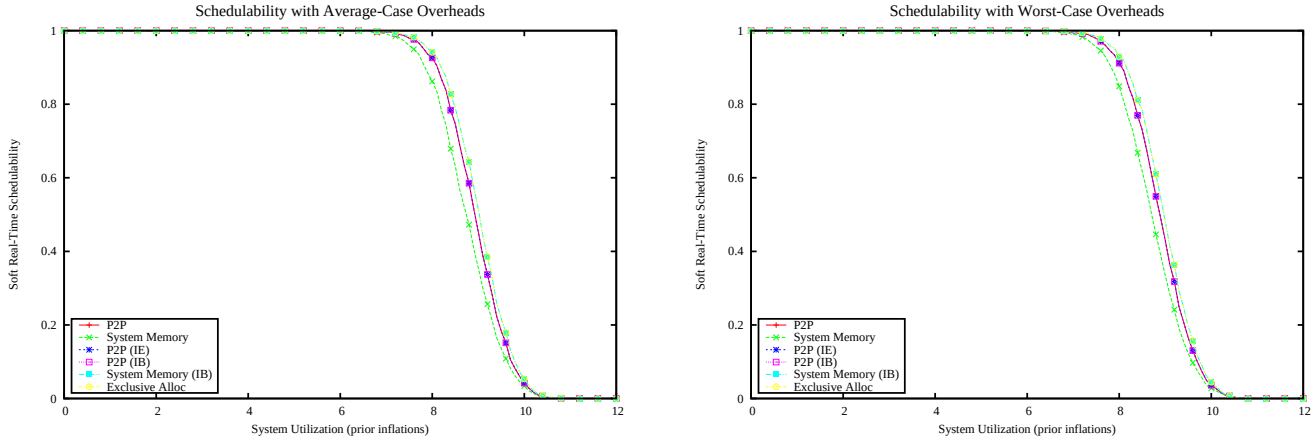

Figure 7507: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

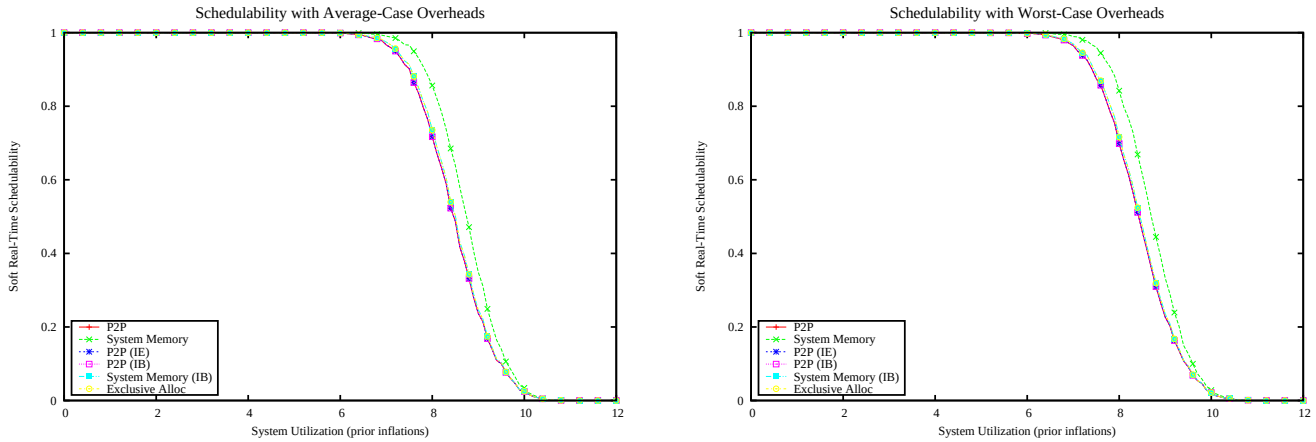

Figure 7508: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

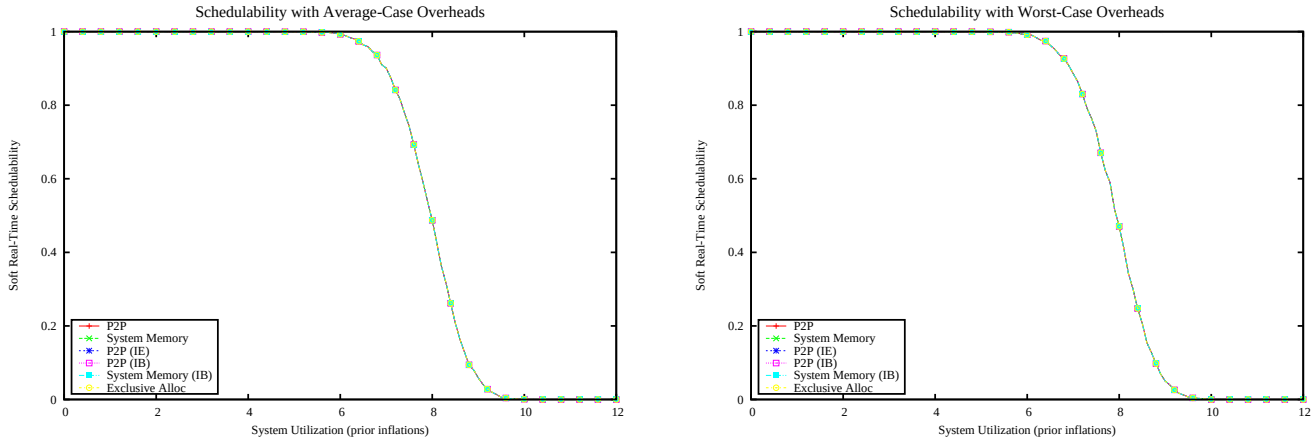

Figure 7509: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

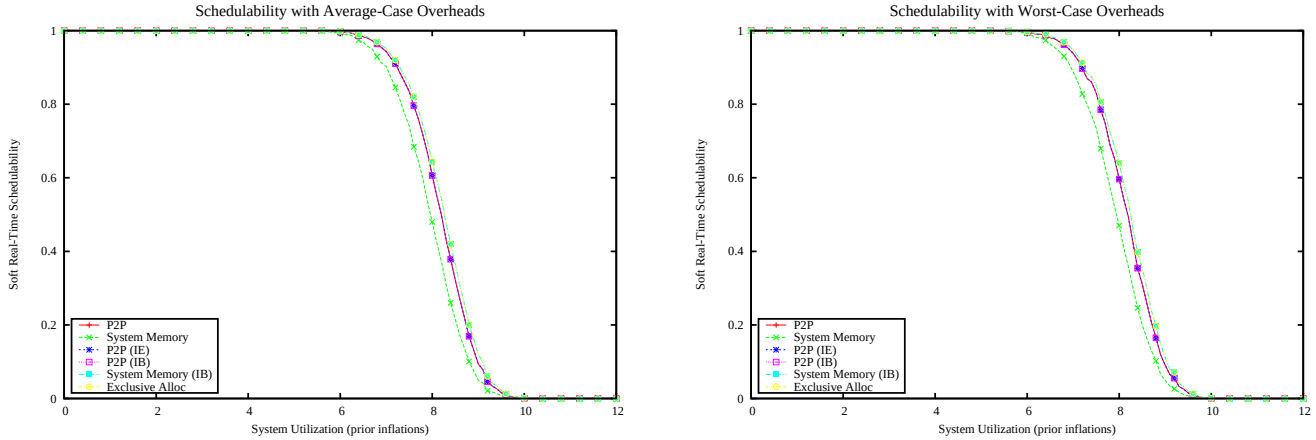

Figure 7510: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

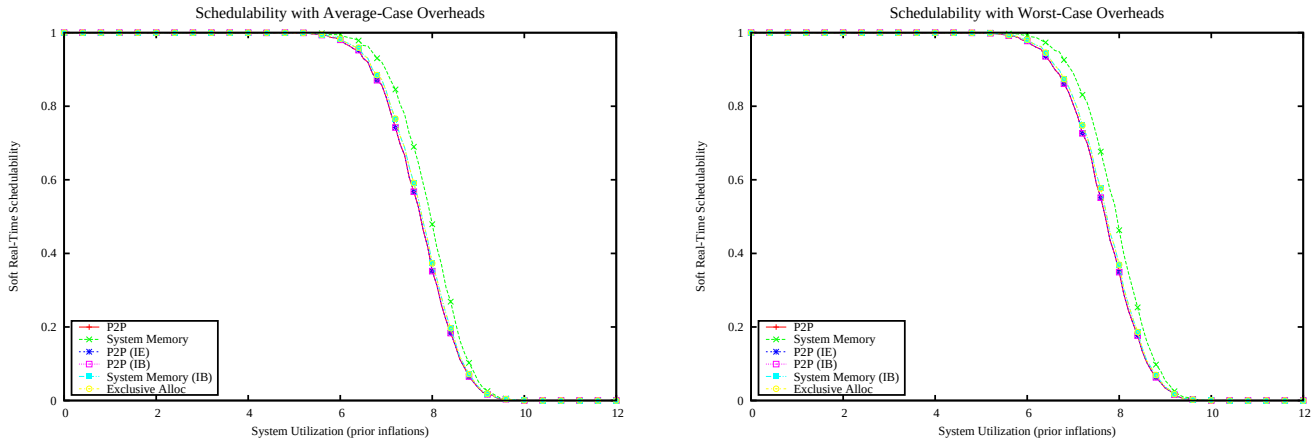

Figure 7511: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

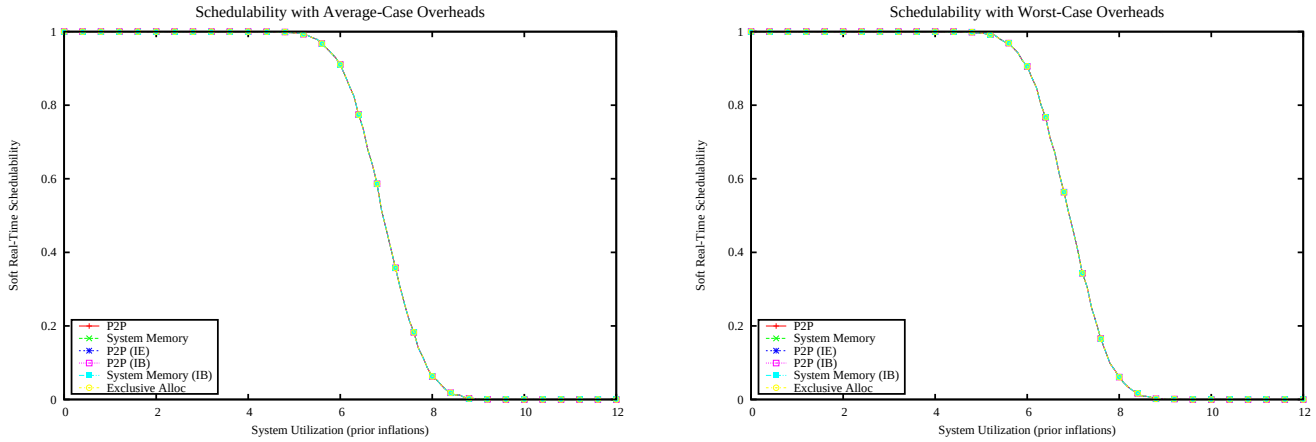

Figure 7512: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

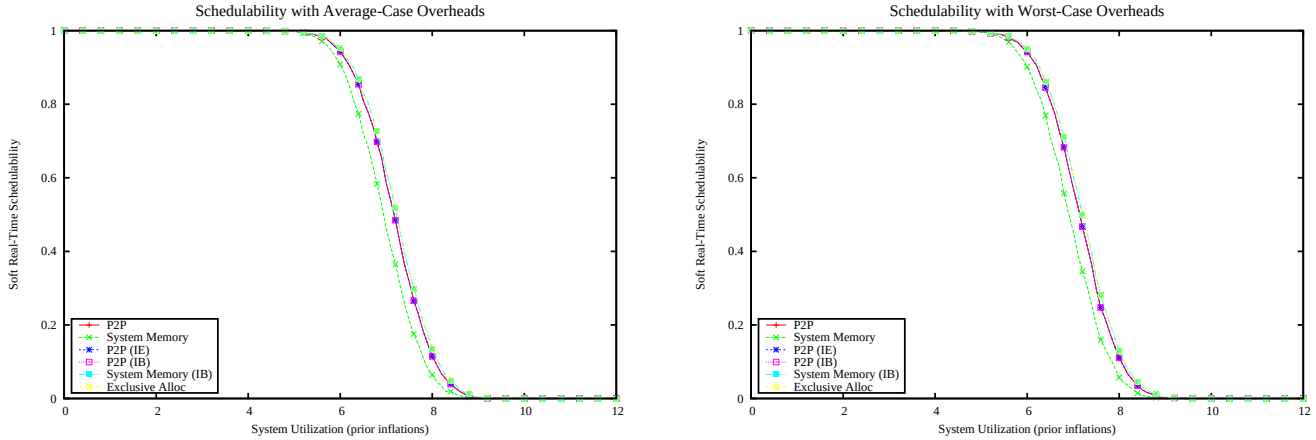

Figure 7513: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

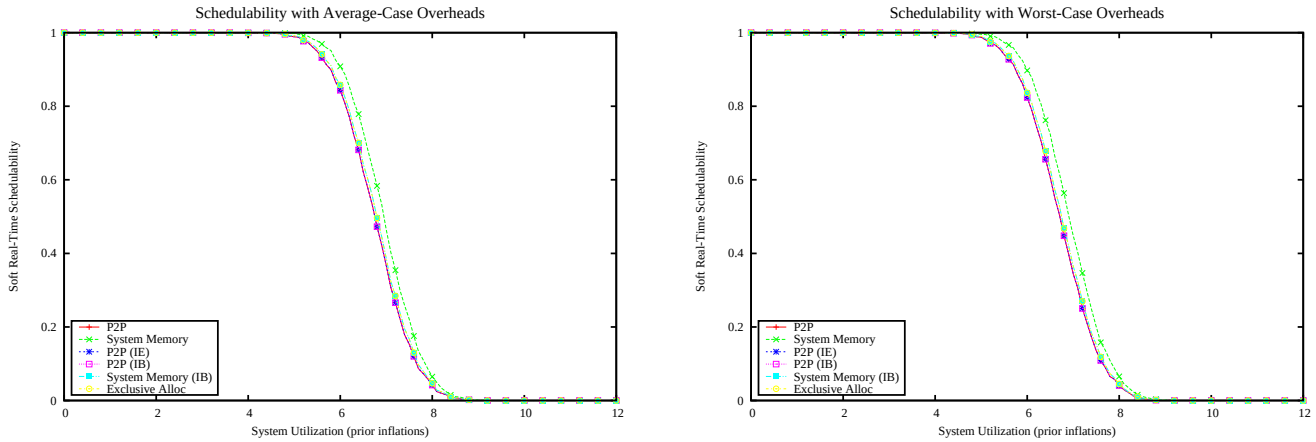

Figure 7514: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

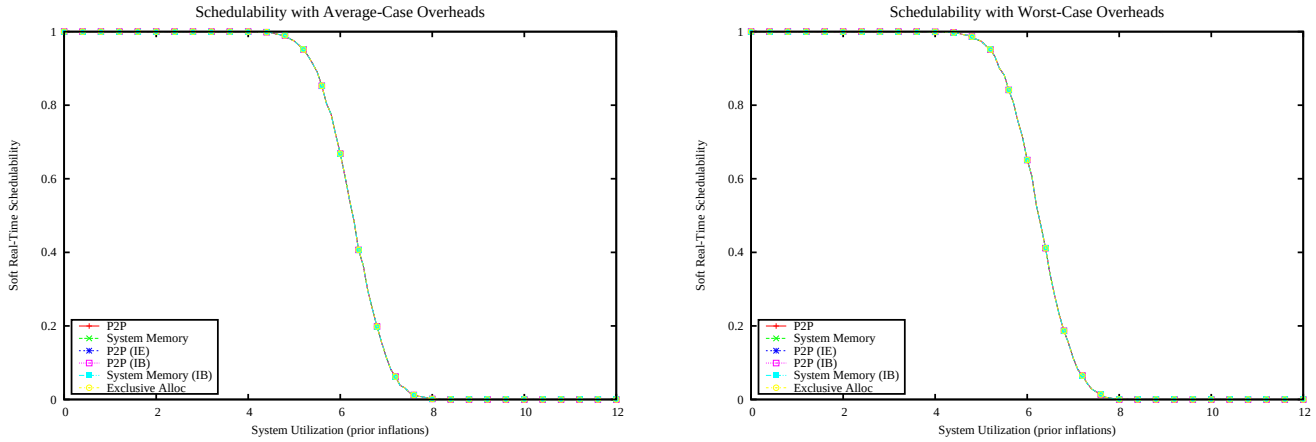

Figure 7515: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

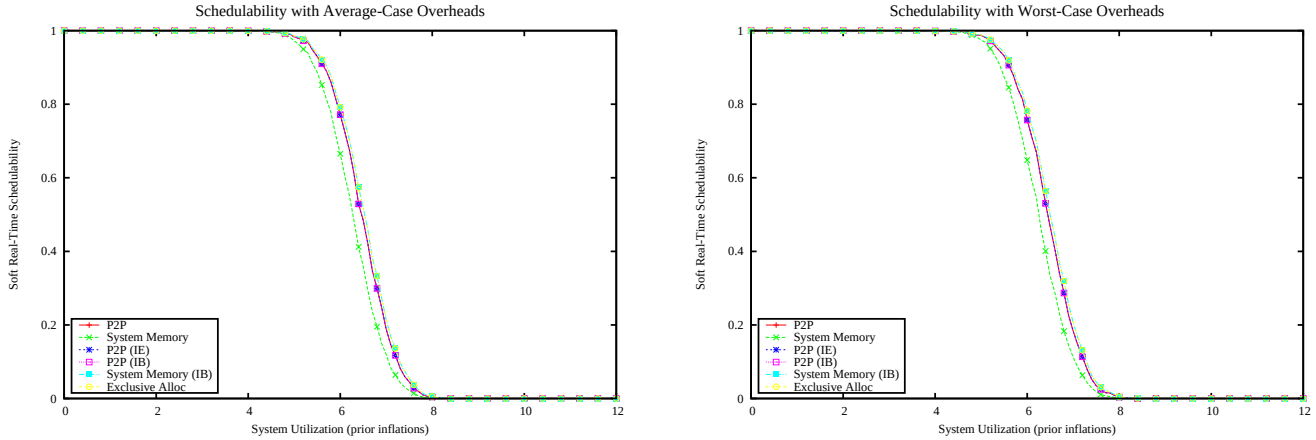

Figure 7516: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

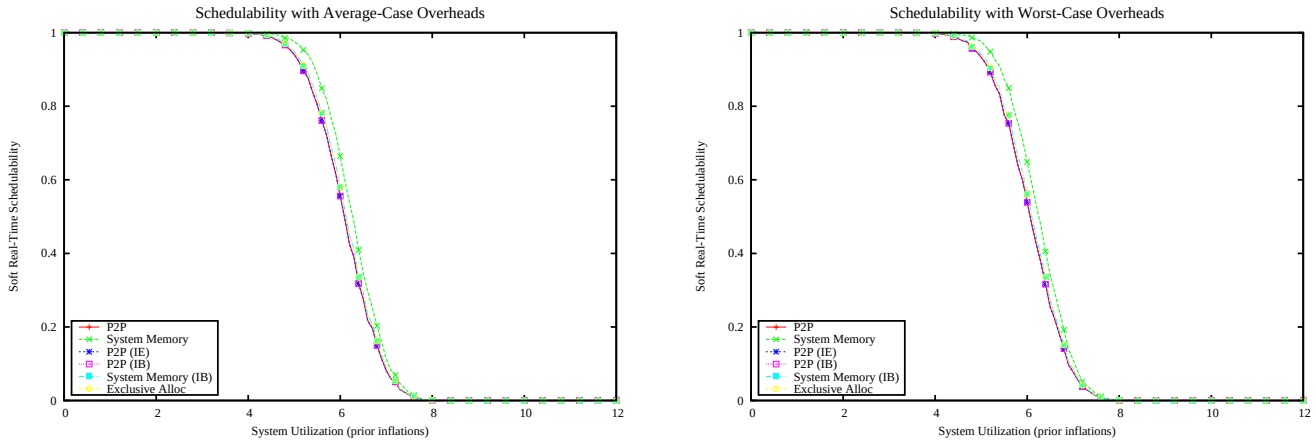

Figure 7517: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

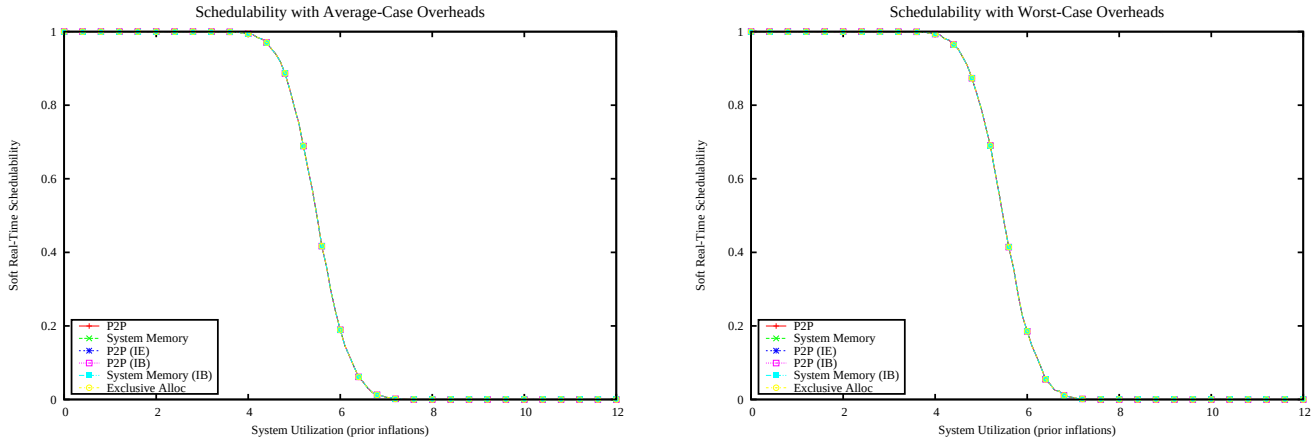

Figure 7518: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

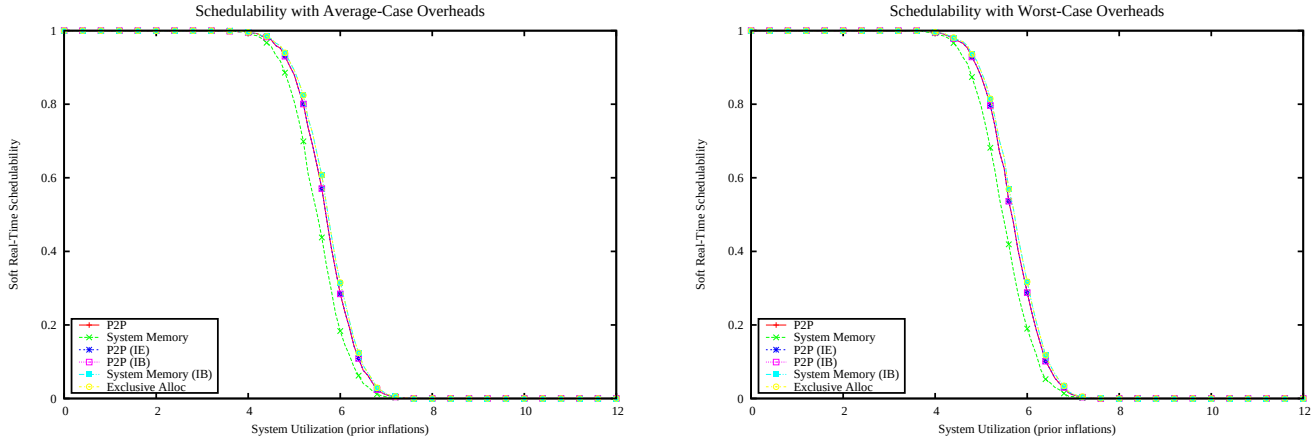

Figure 7519: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

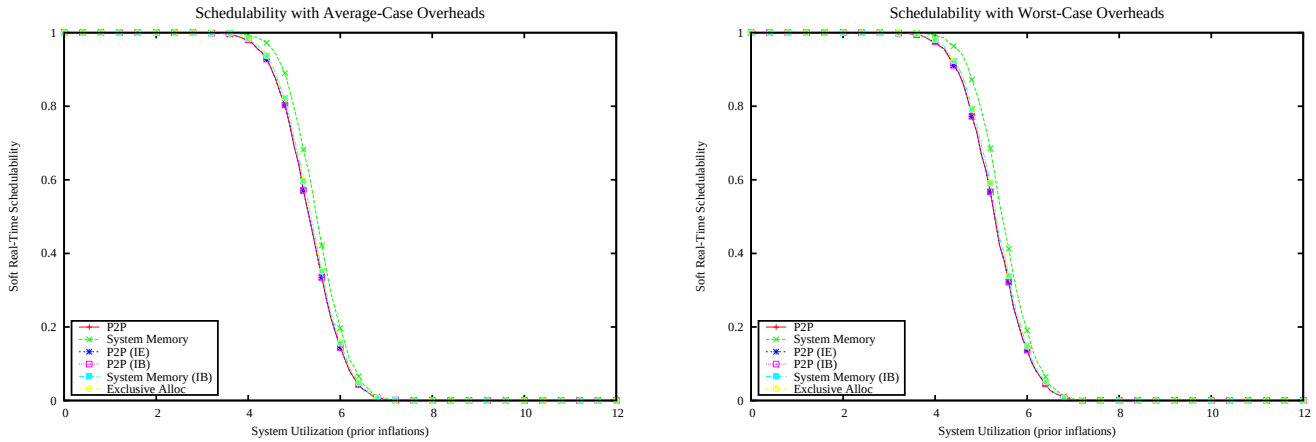

Figure 7520: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], No State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

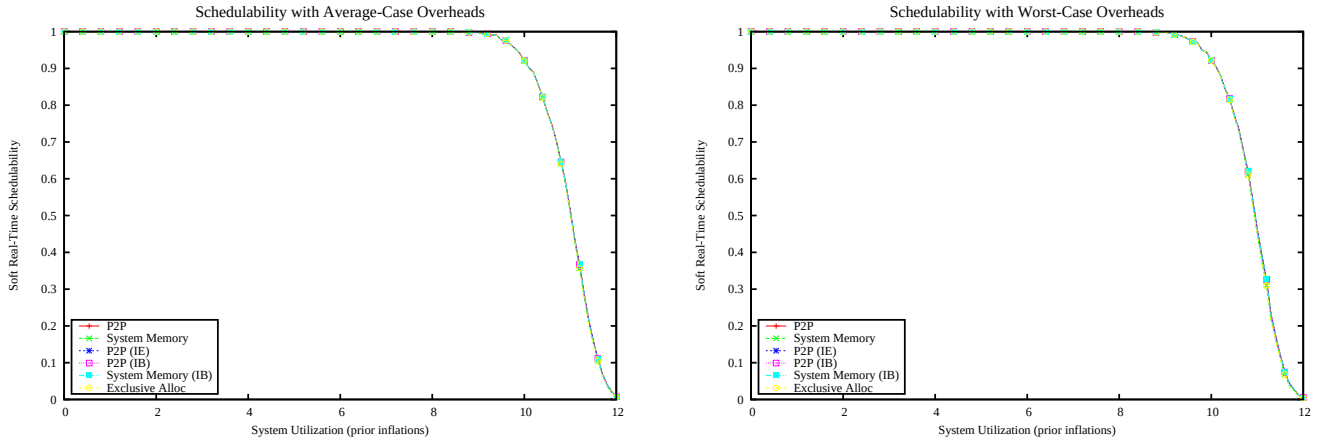

Figure 7521: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

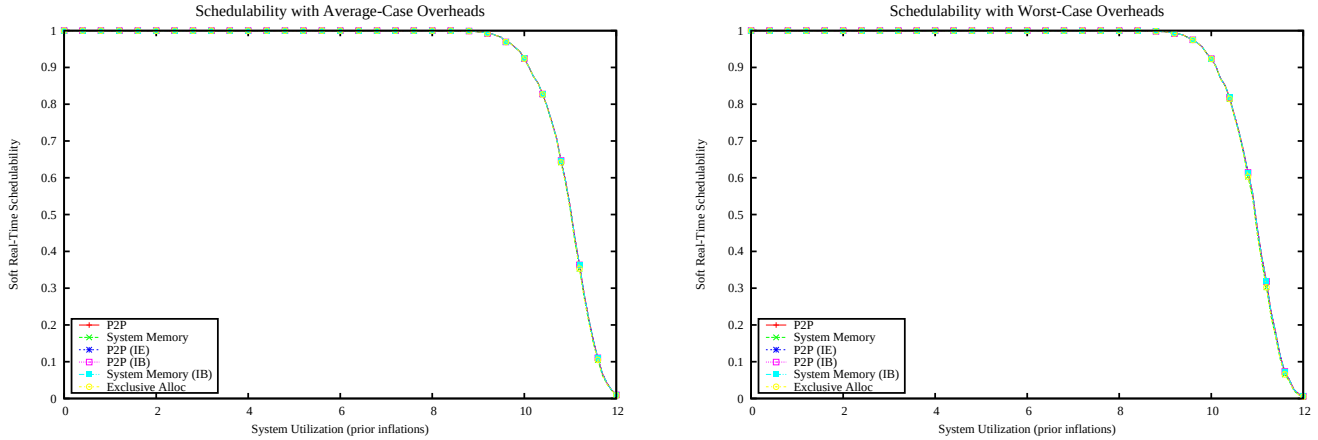

Figure 7522: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

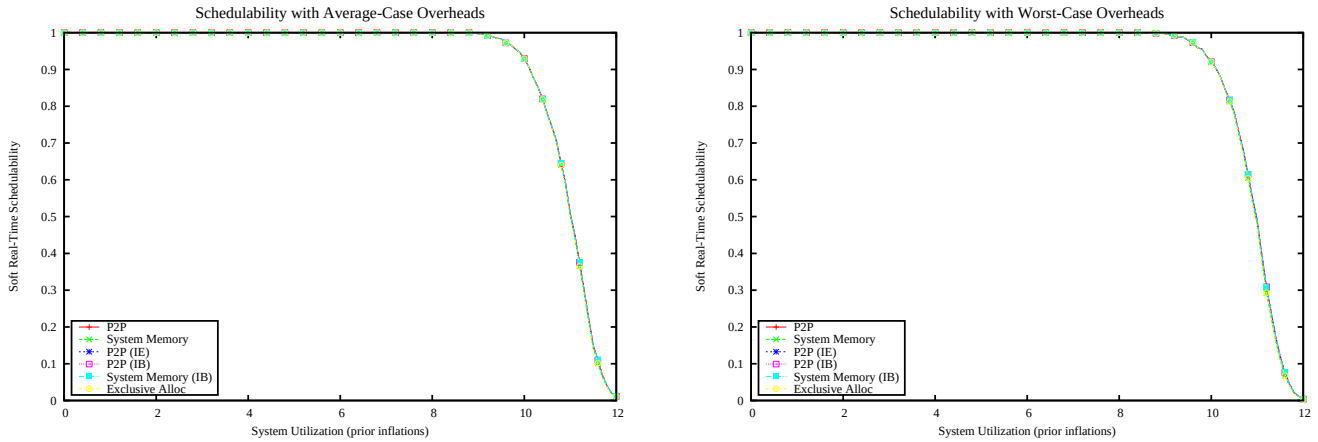

Figure 7523: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

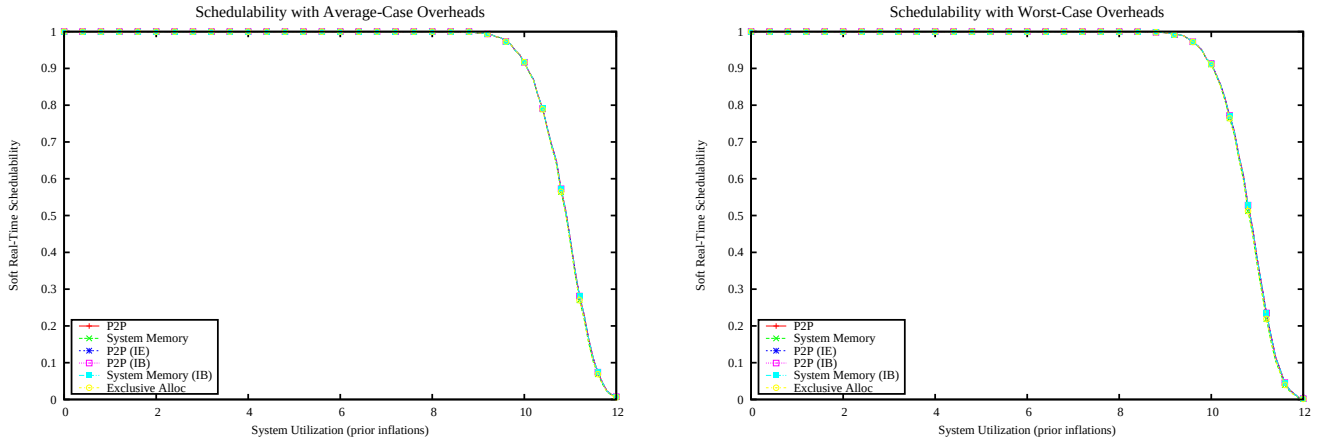

Figure 7524: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

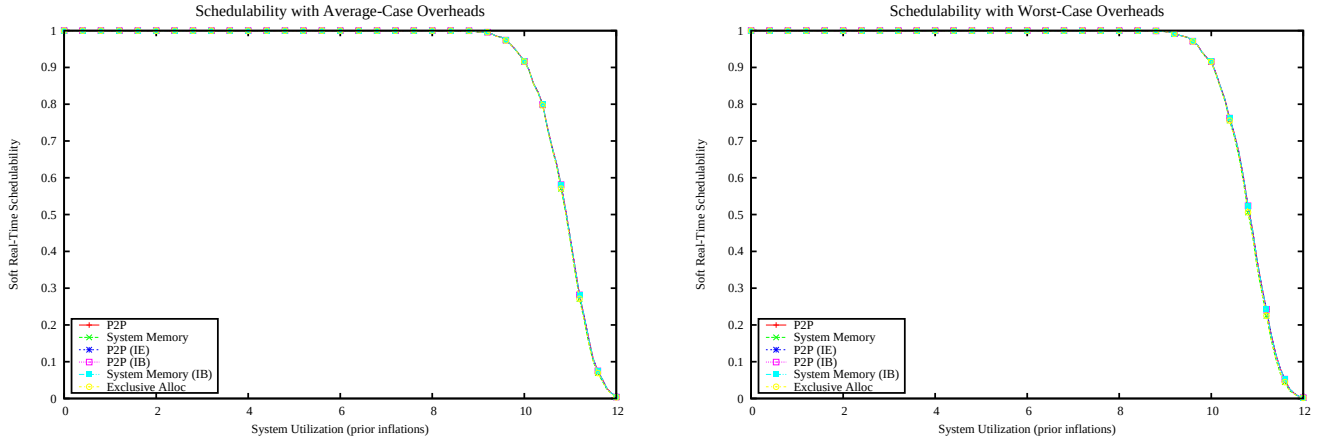

Figure 7525: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

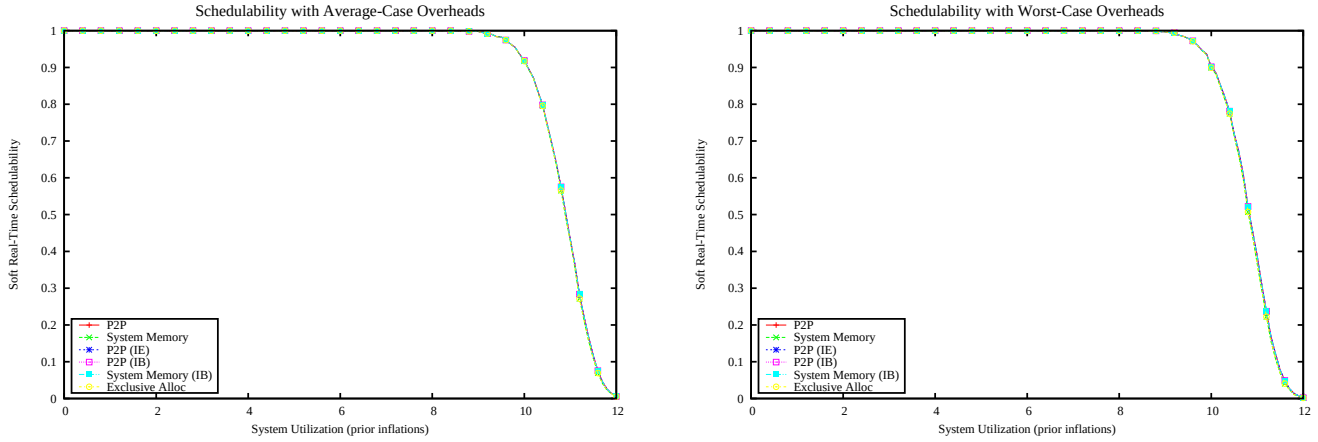

Figure 7526: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

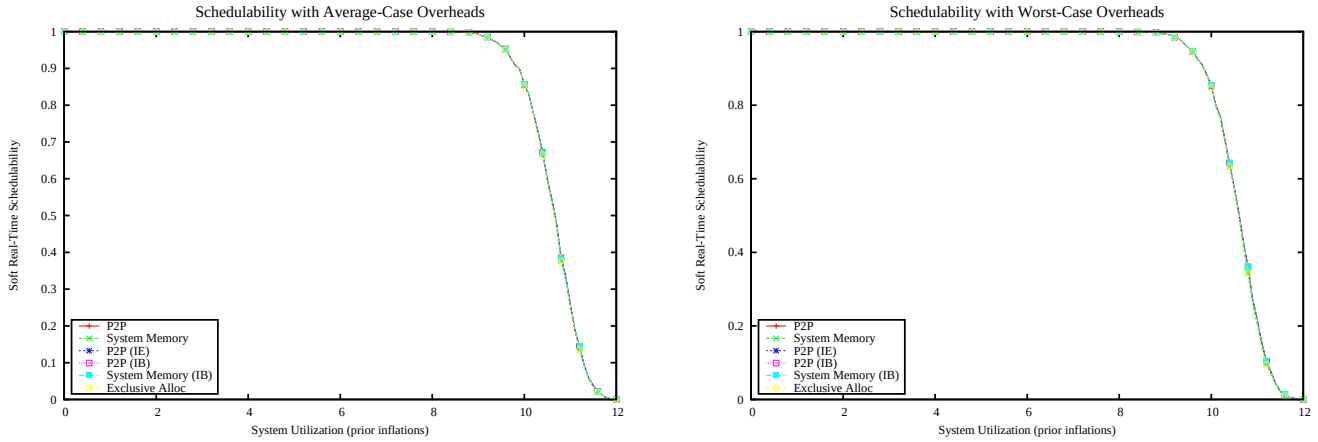

Figure 7527: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

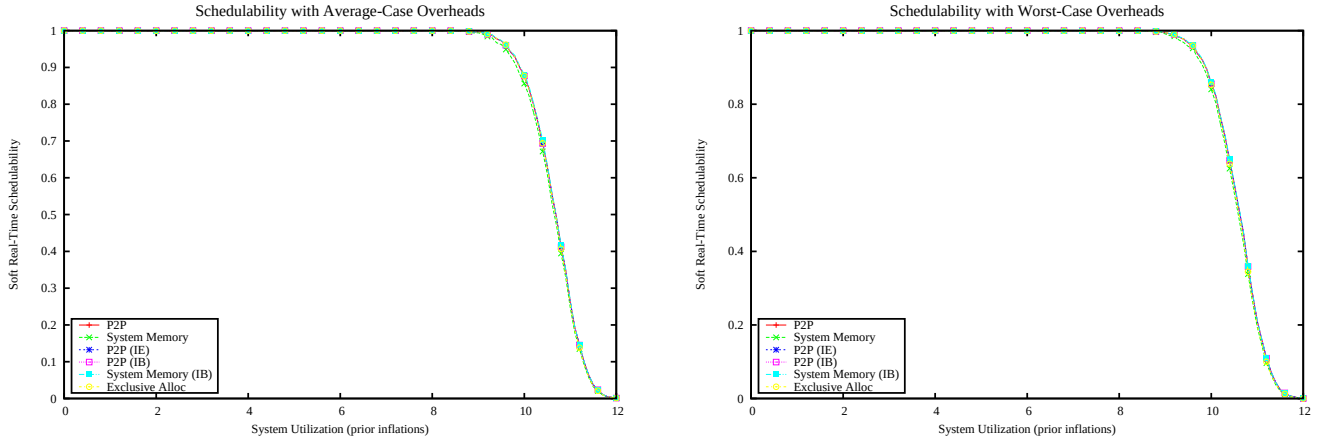

Figure 7528: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

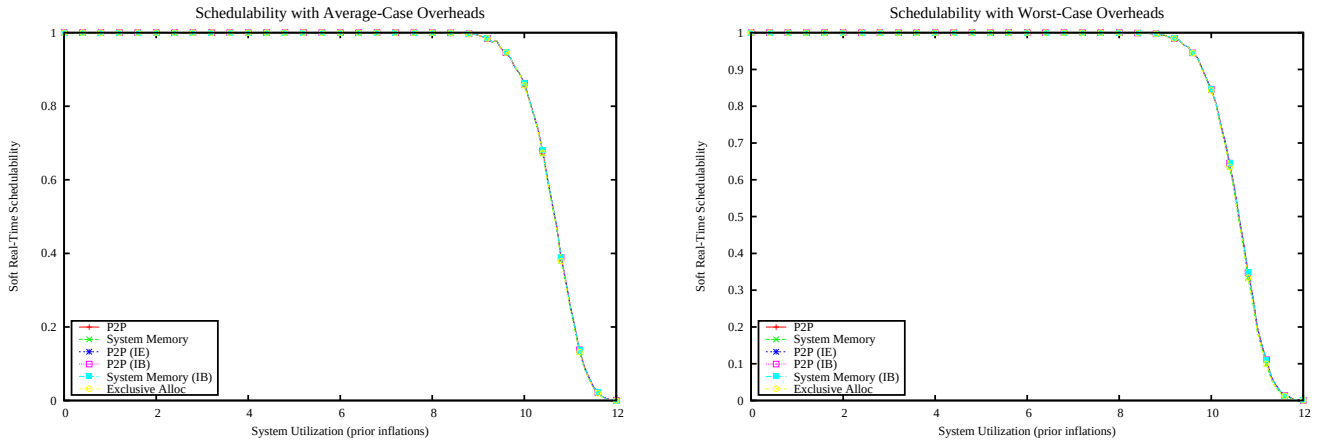

Figure 7529: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

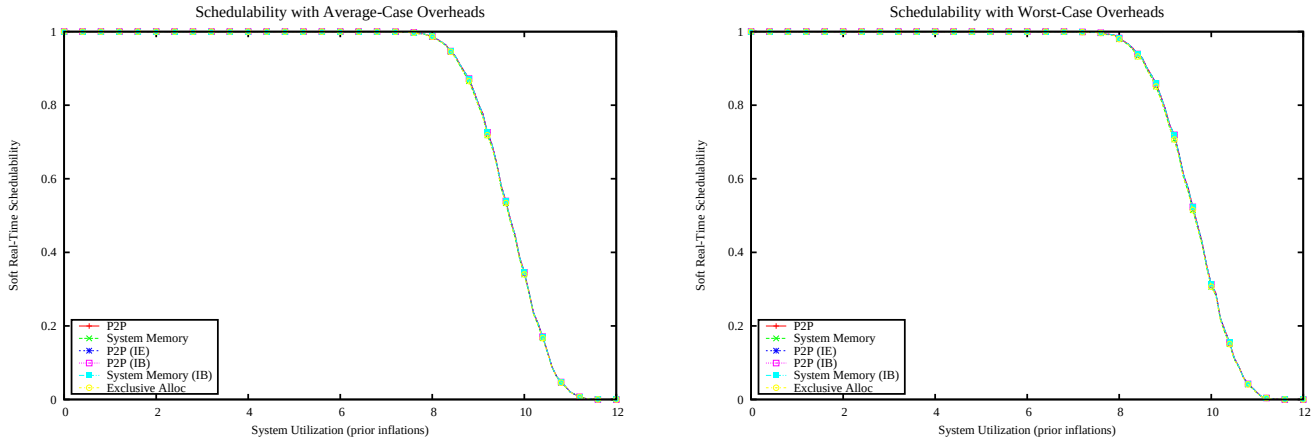

Figure 7530: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

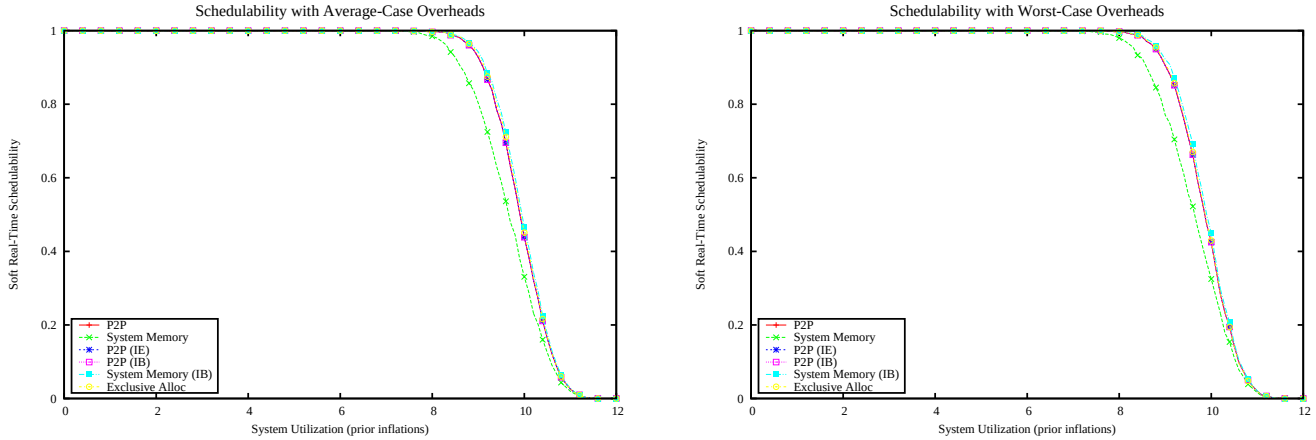

Figure 7531: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

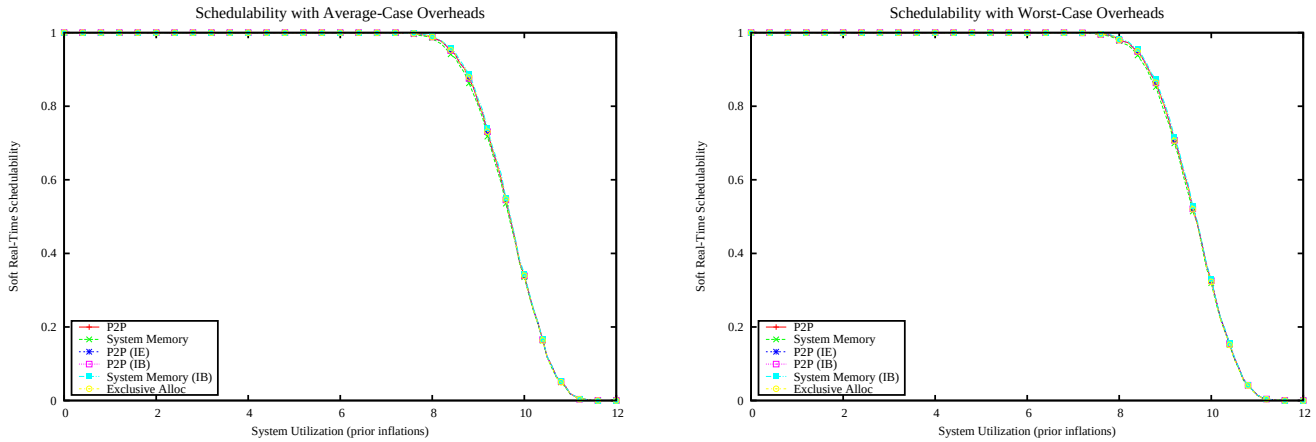

Figure 7532: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

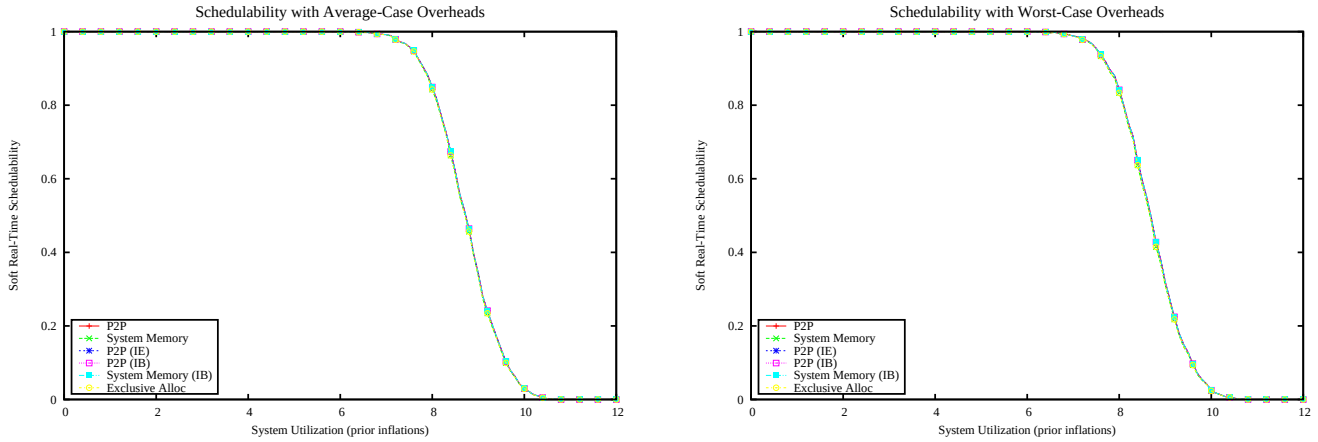

Figure 7533: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

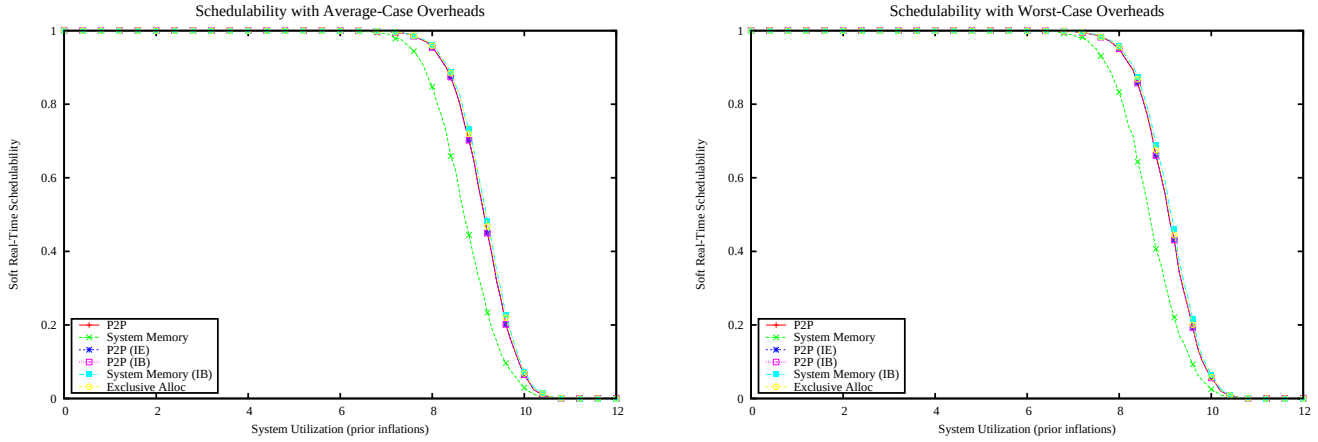

Figure 7534: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

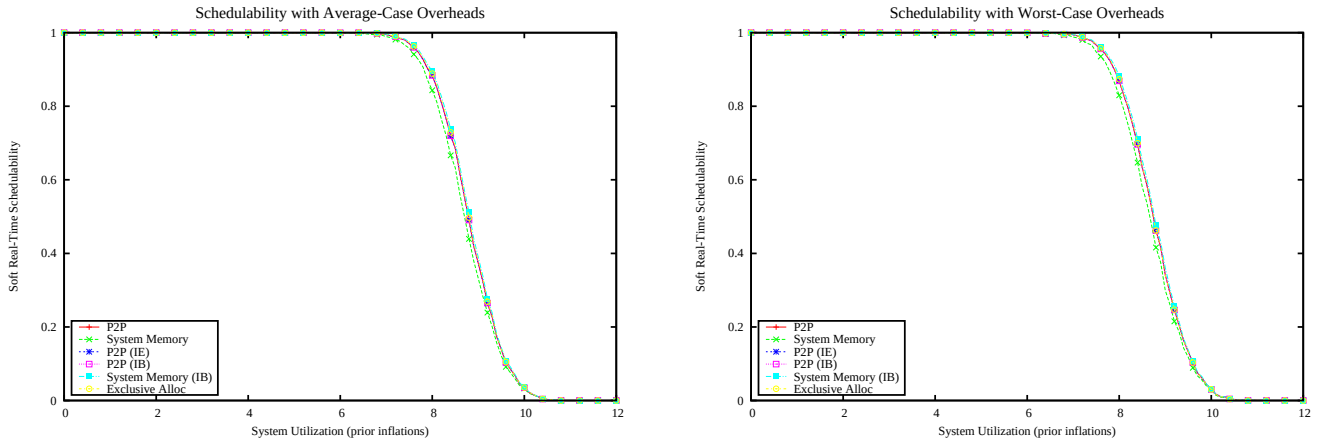

Figure 7535: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

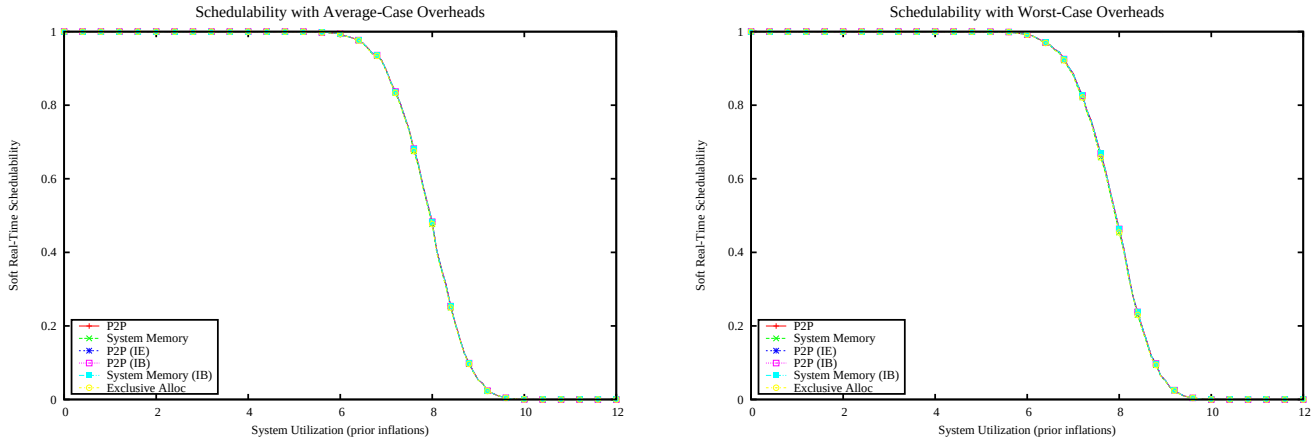

Figure 7536: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

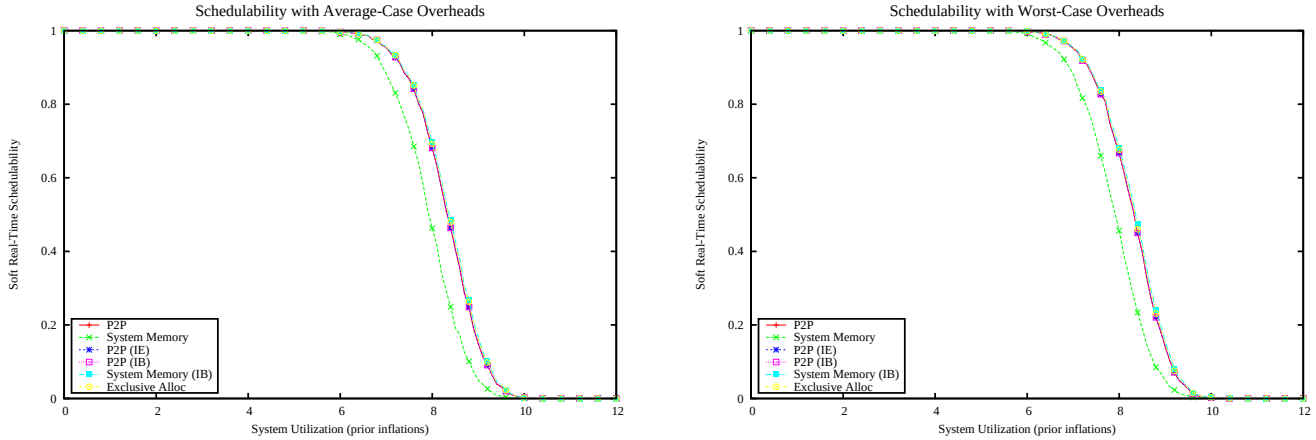

Figure 7537: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

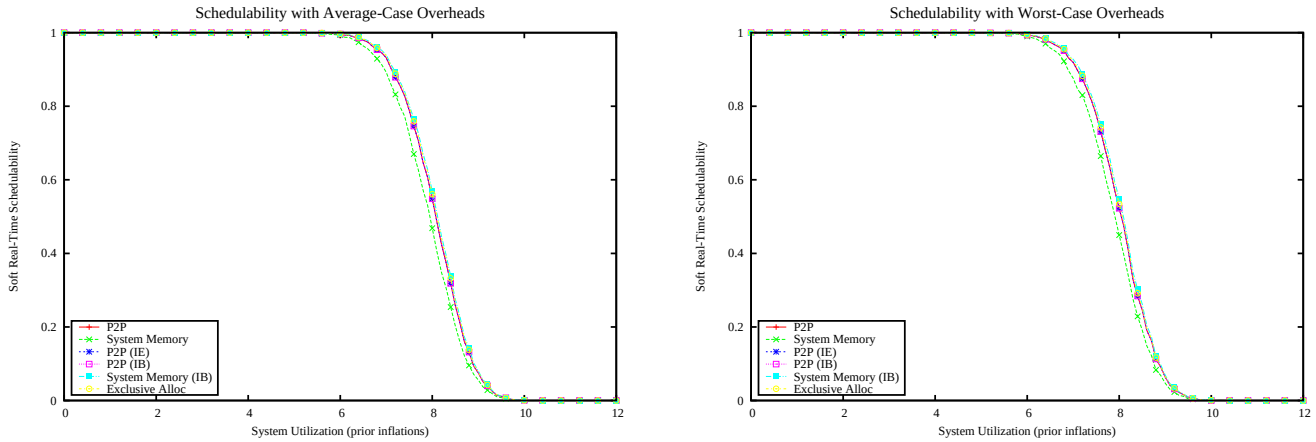

Figure 7538: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

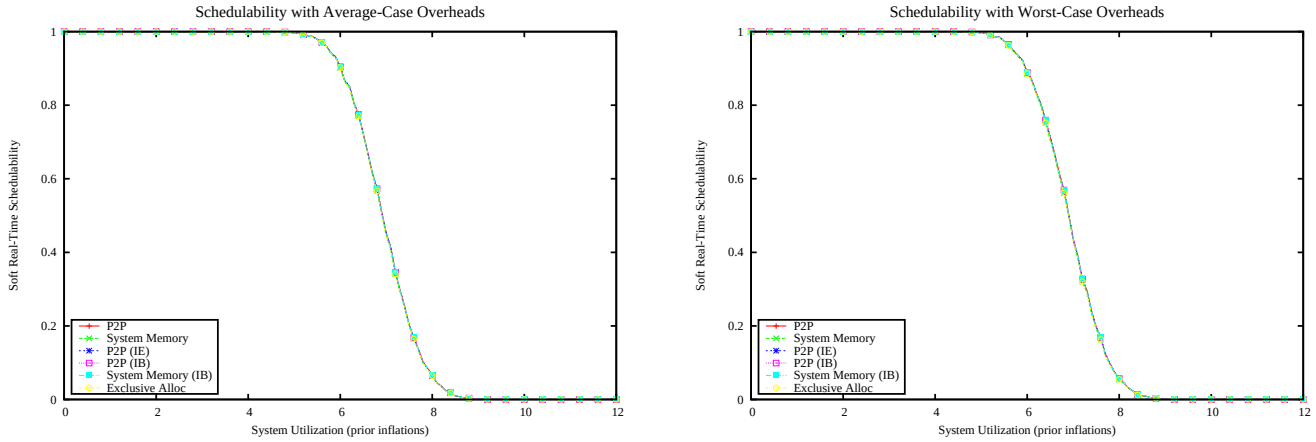

Figure 7539: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

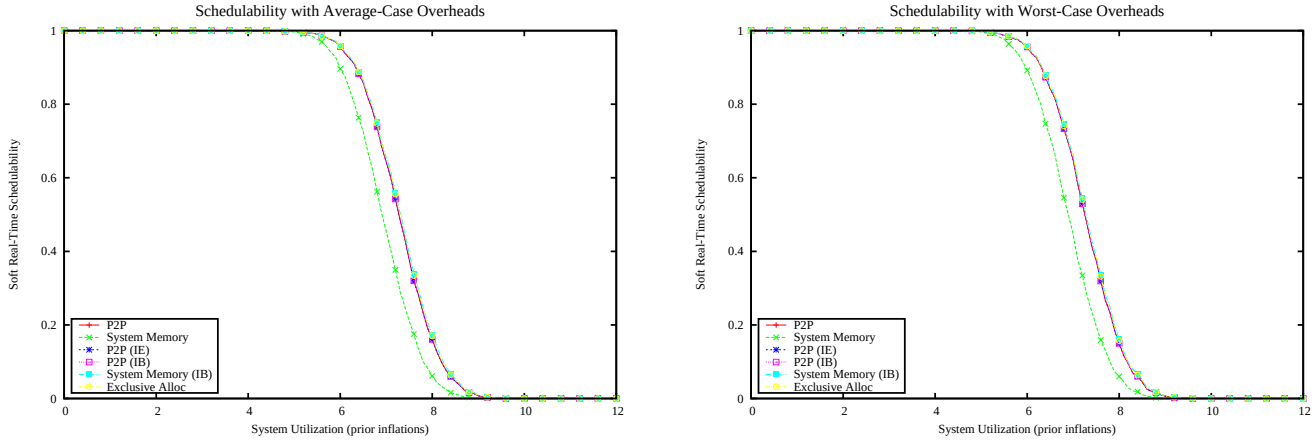

Figure 7540: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

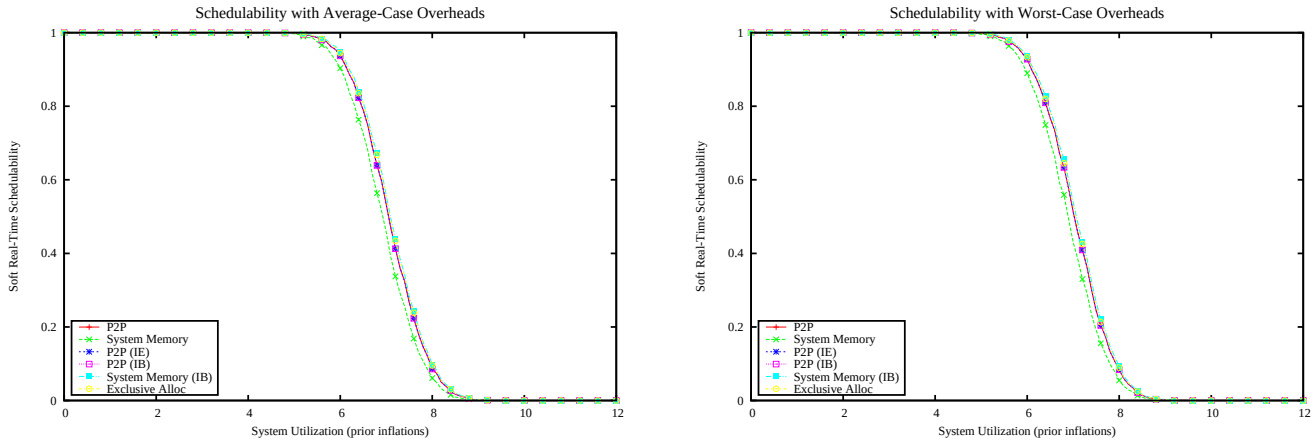

Figure 7541: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

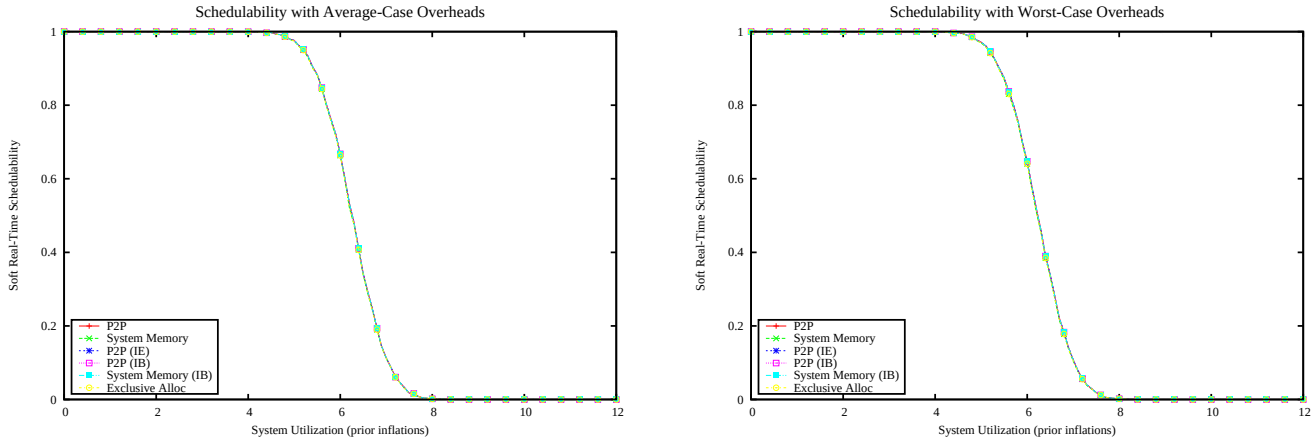

Figure 7542: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

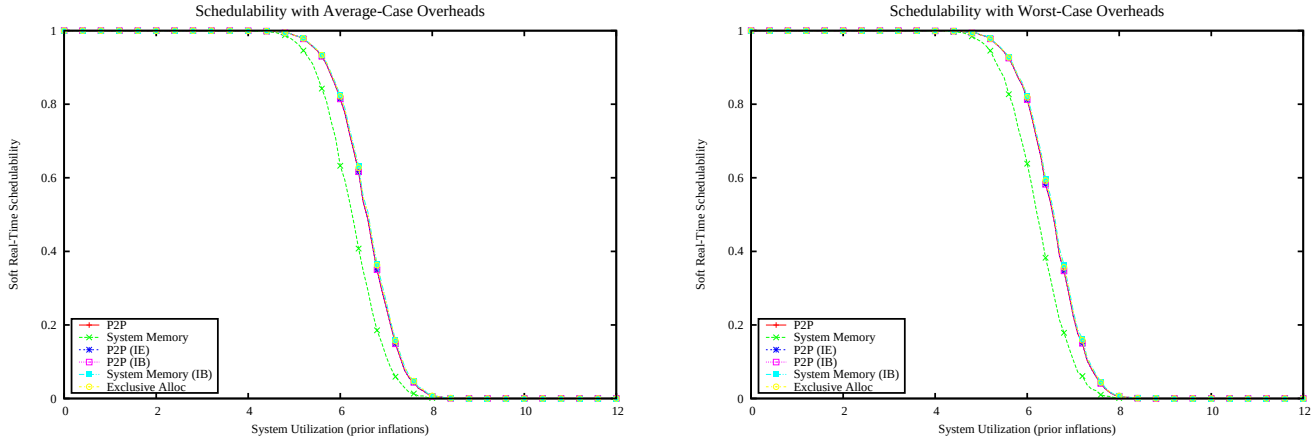

Figure 7543: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

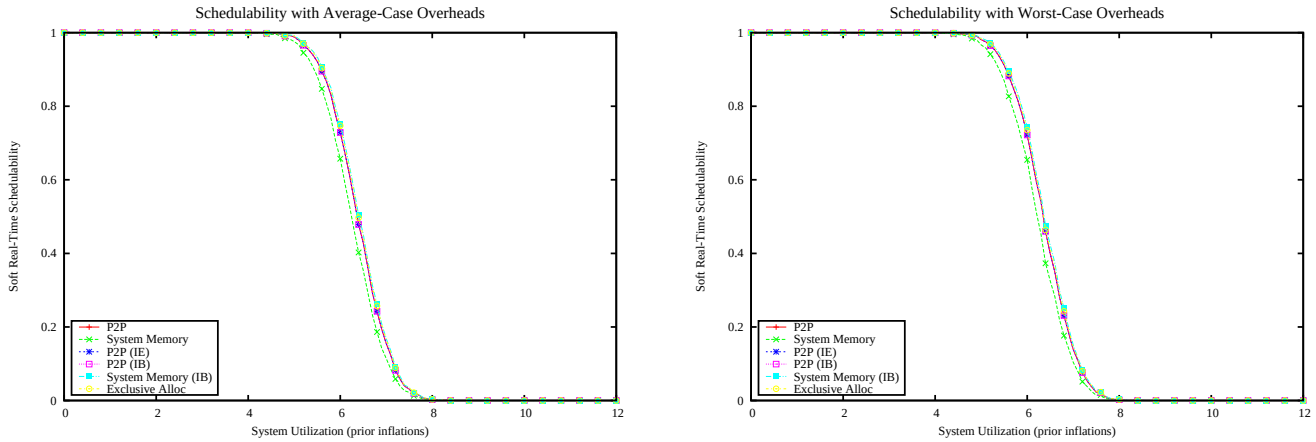

Figure 7544: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

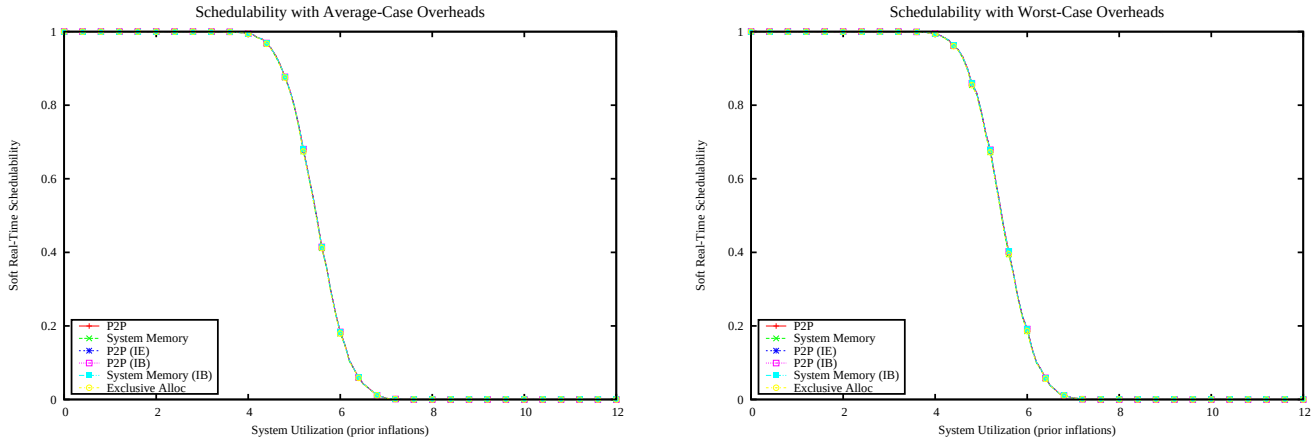

Figure 7545: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

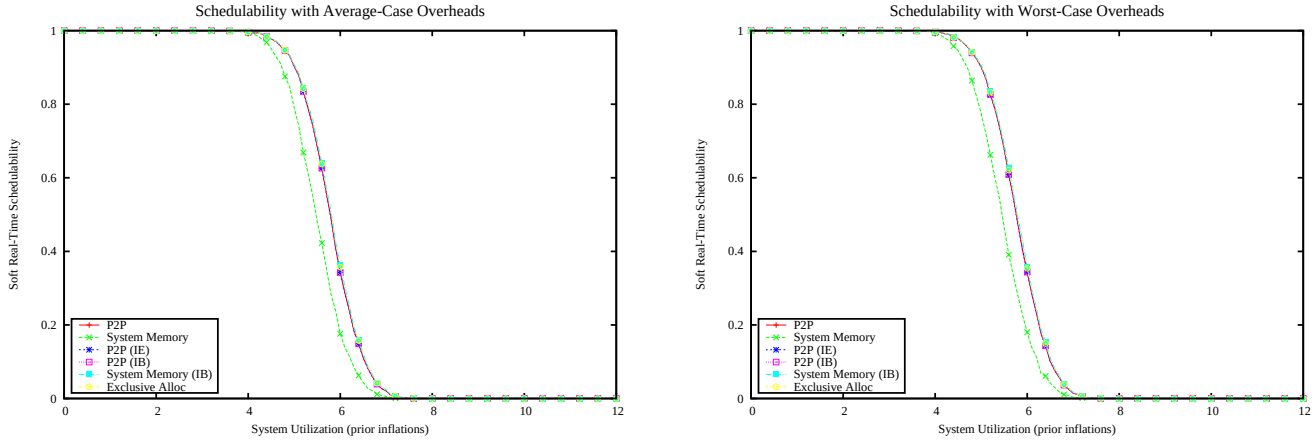

Figure 7546: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

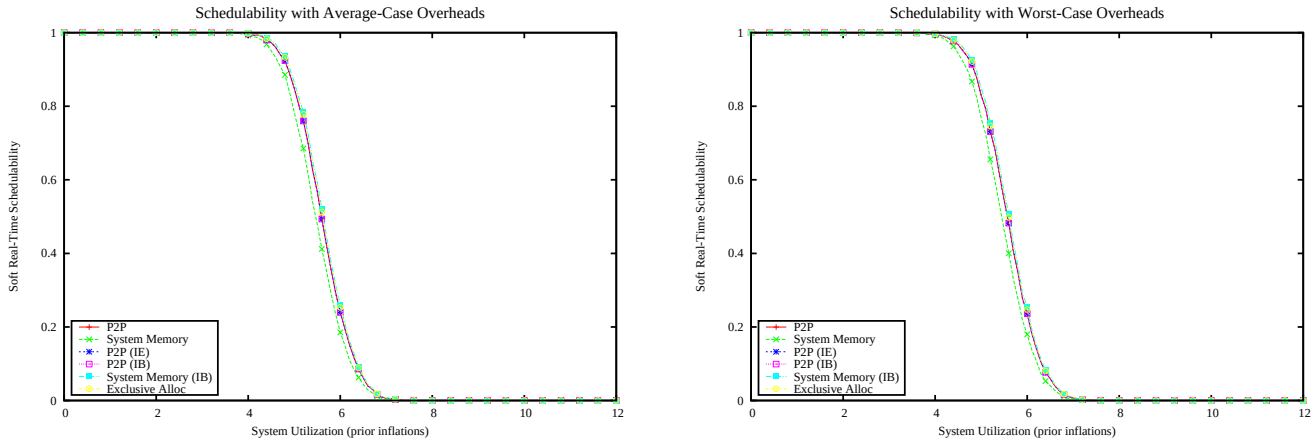

Figure 7547: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

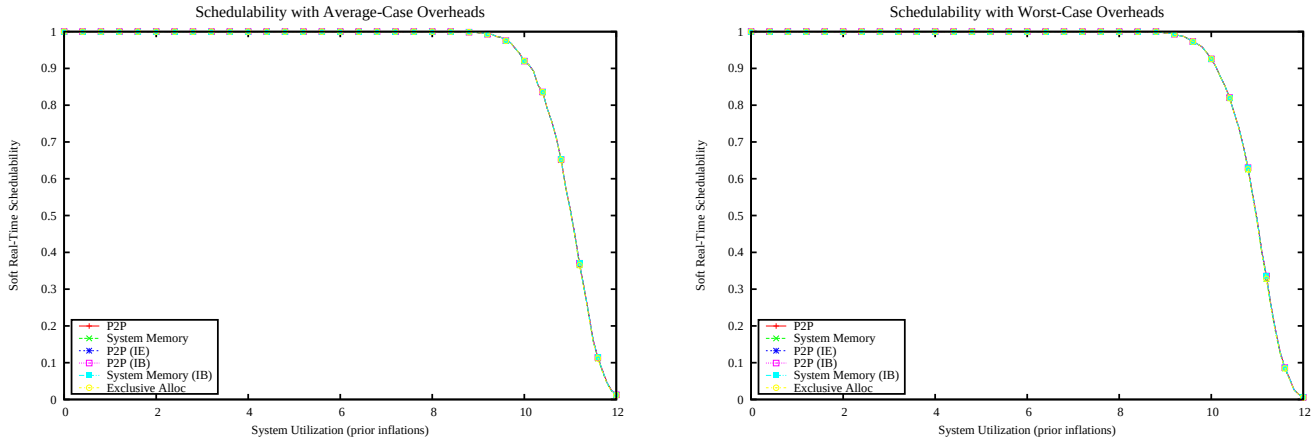

Figure 7548: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

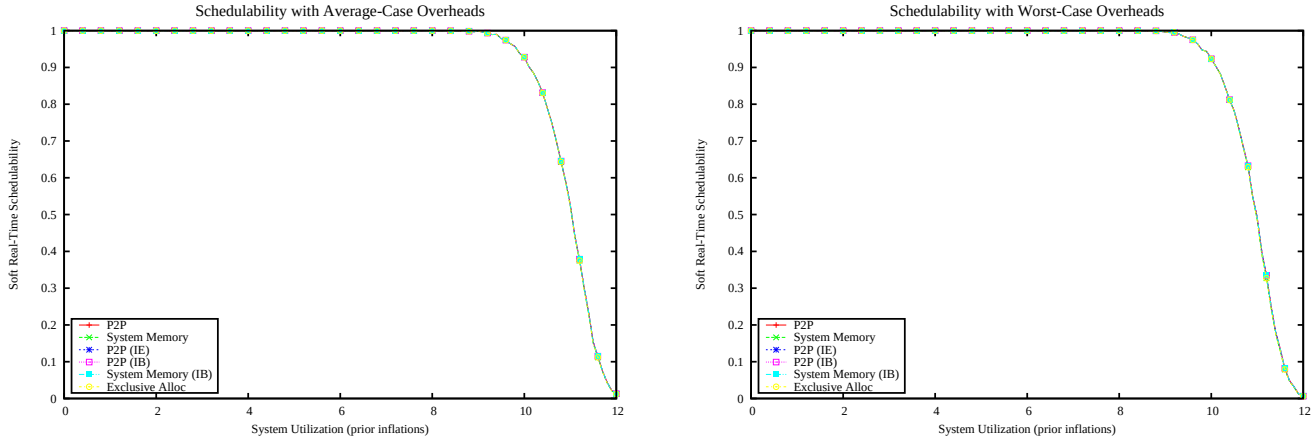

Figure 7549: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

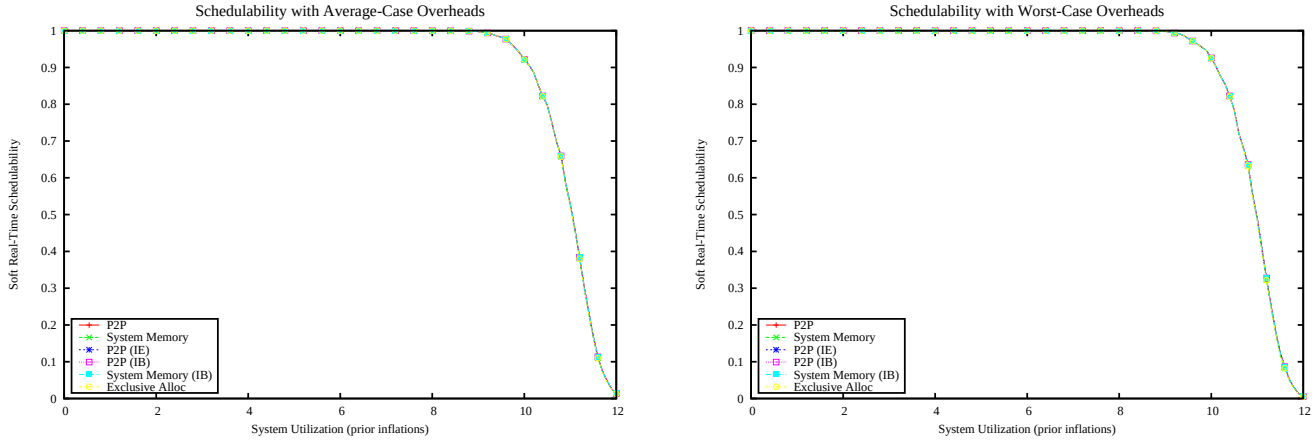

Figure 7550: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

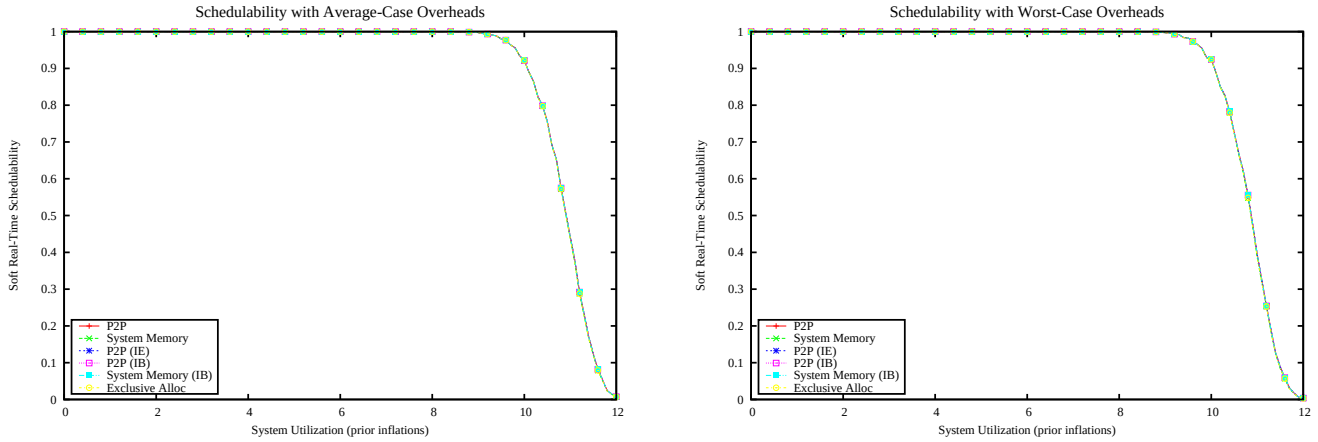

Figure 7551: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

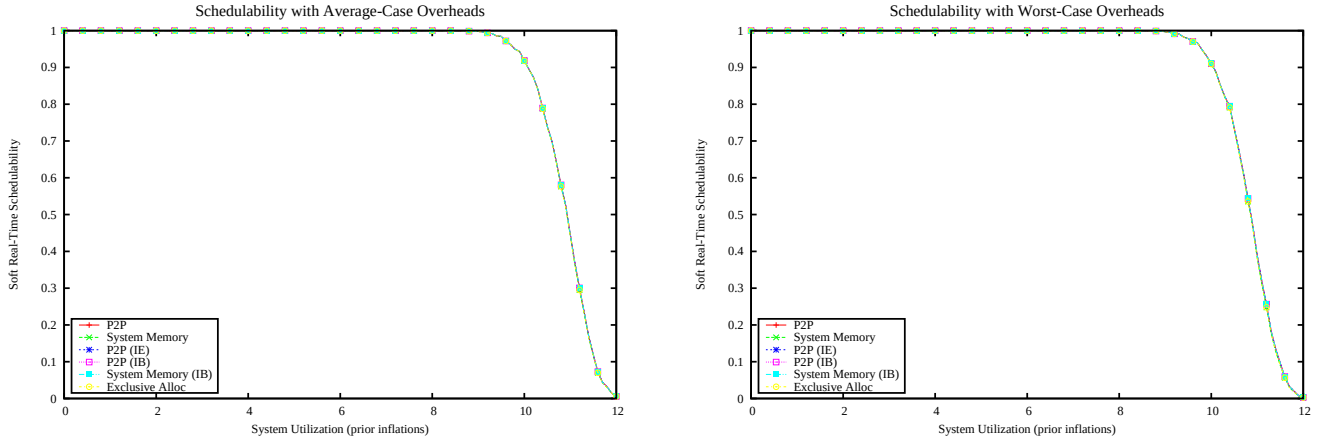

Figure 7552: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

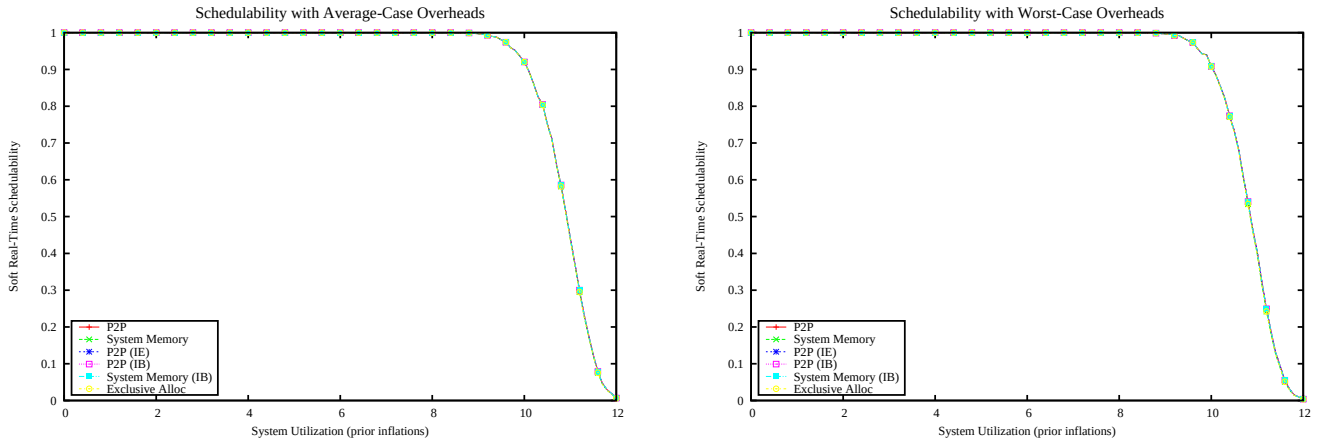

Figure 7553: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

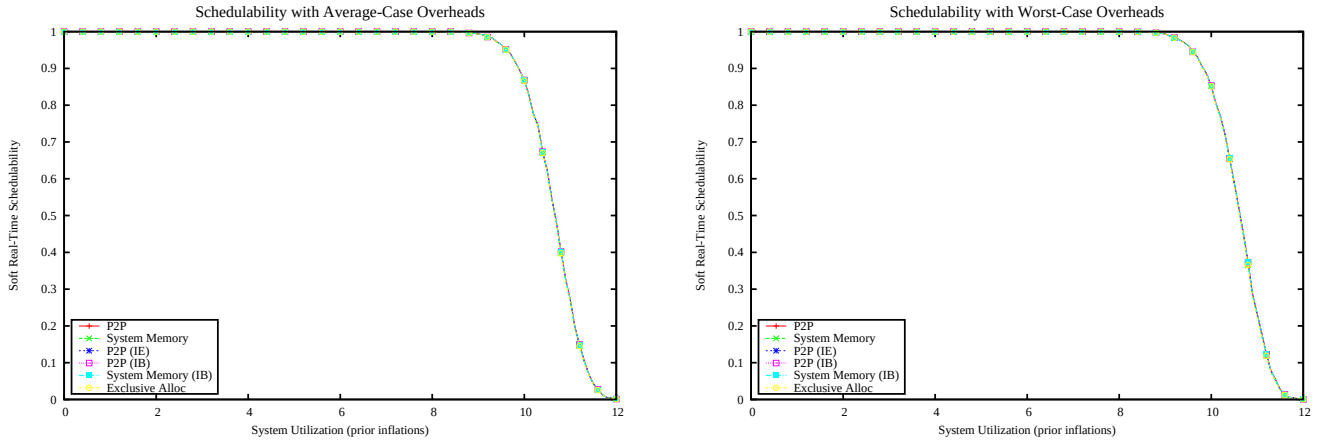

Figure 7554: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

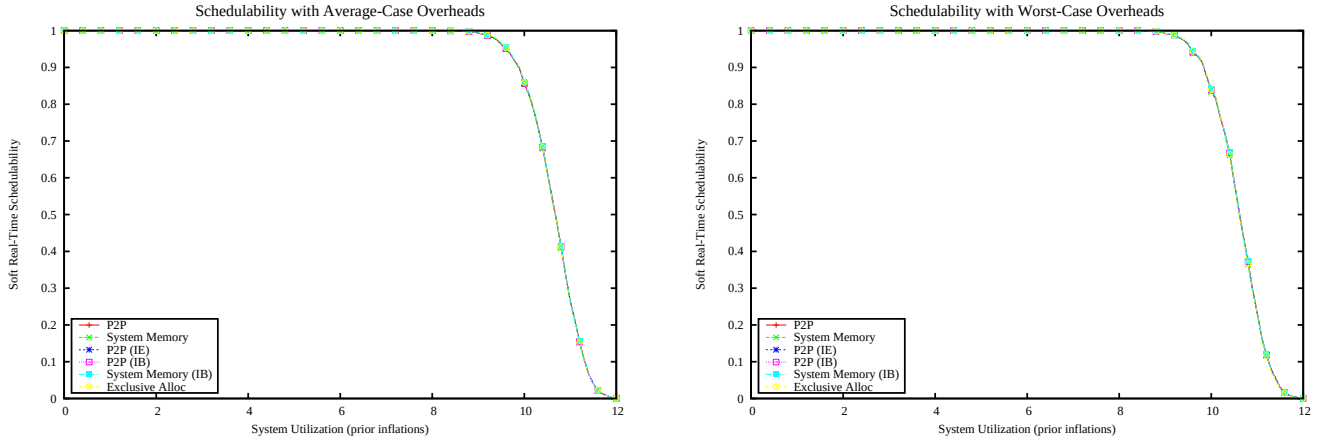

Figure 7555: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

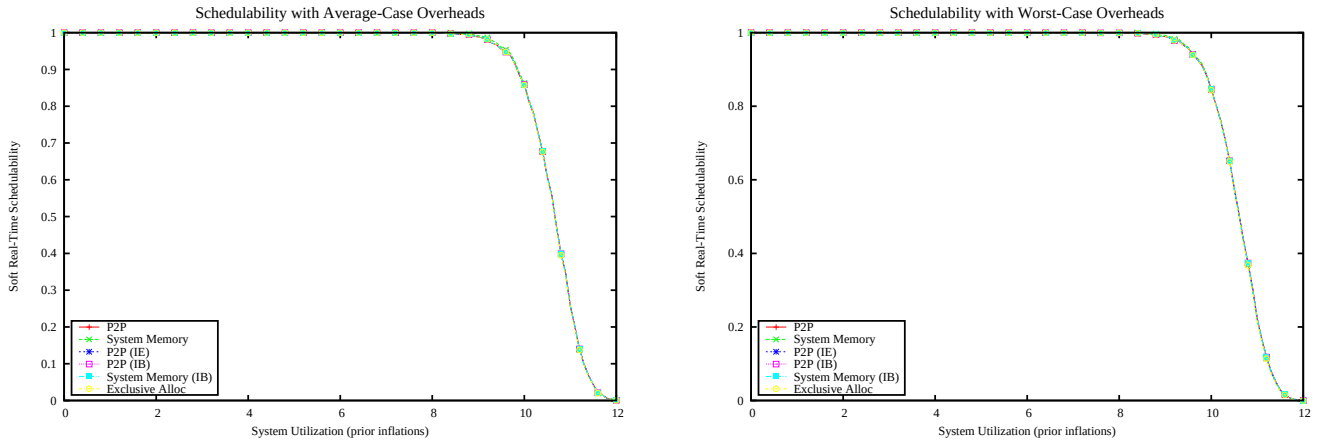

Figure 7556: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

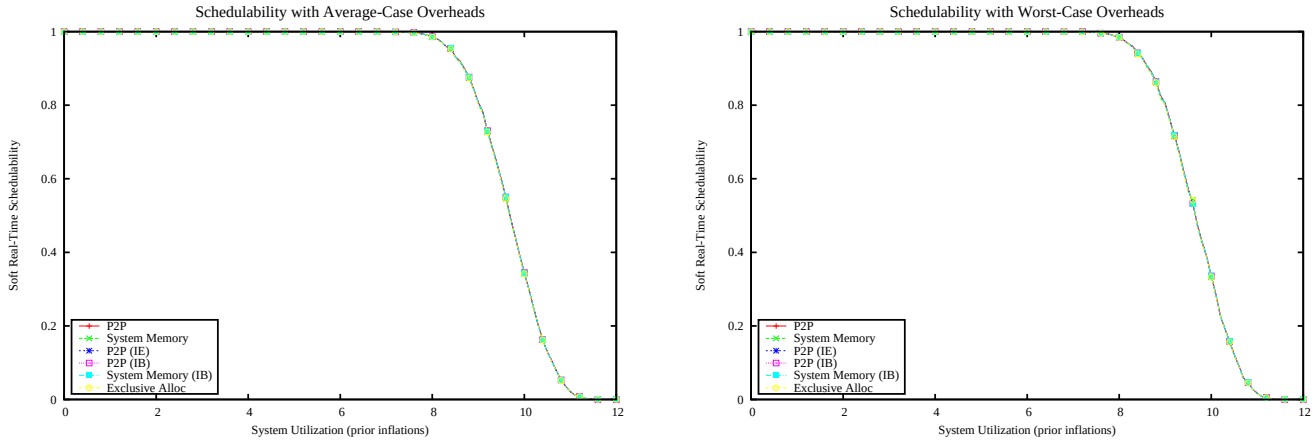

Figure 7557: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

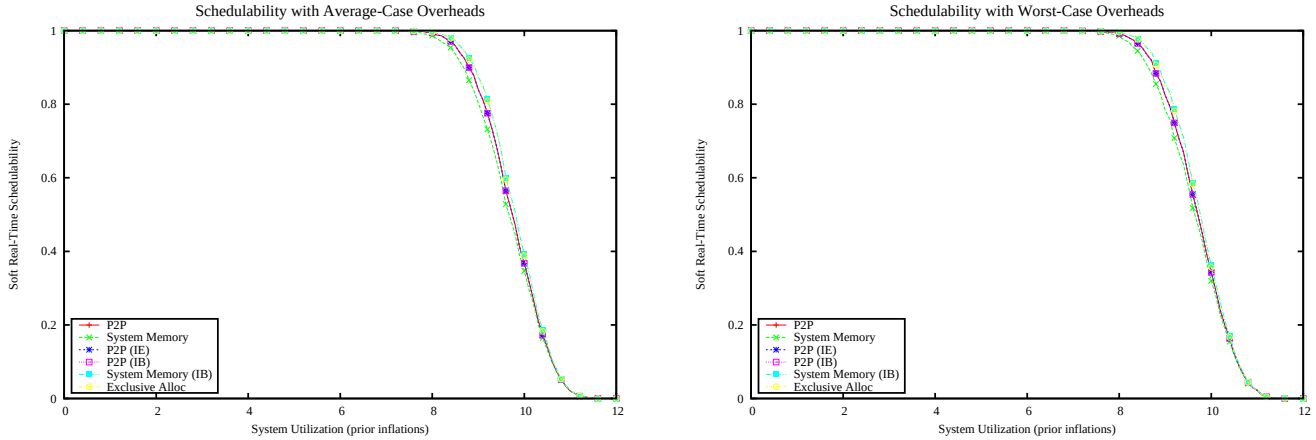

Figure 7558: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

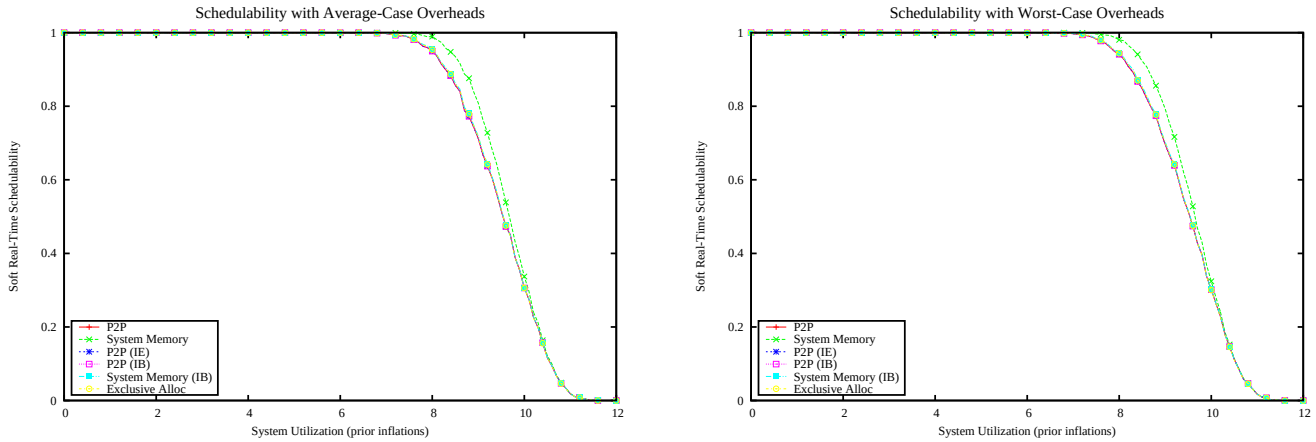

Figure 7559: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

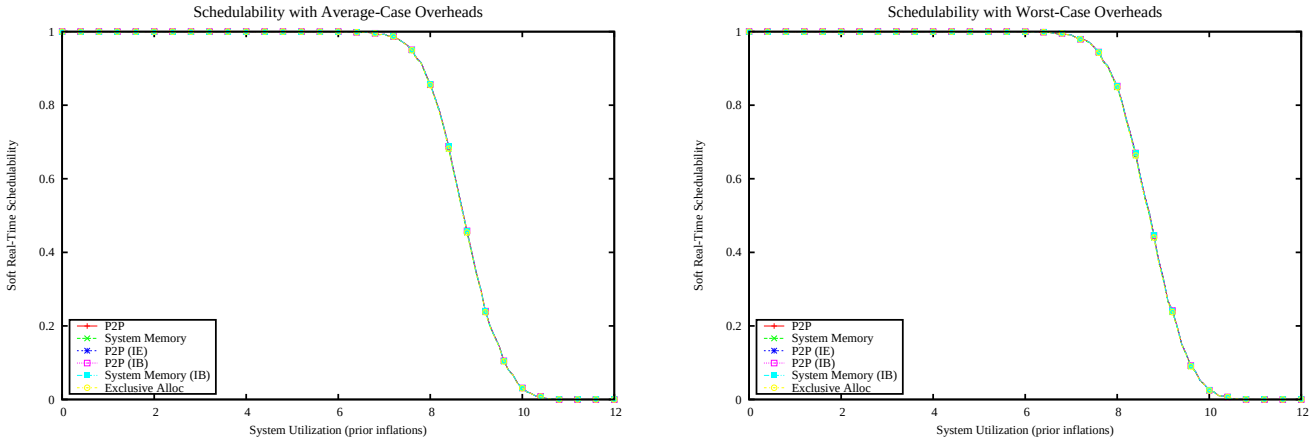

Figure 7560: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

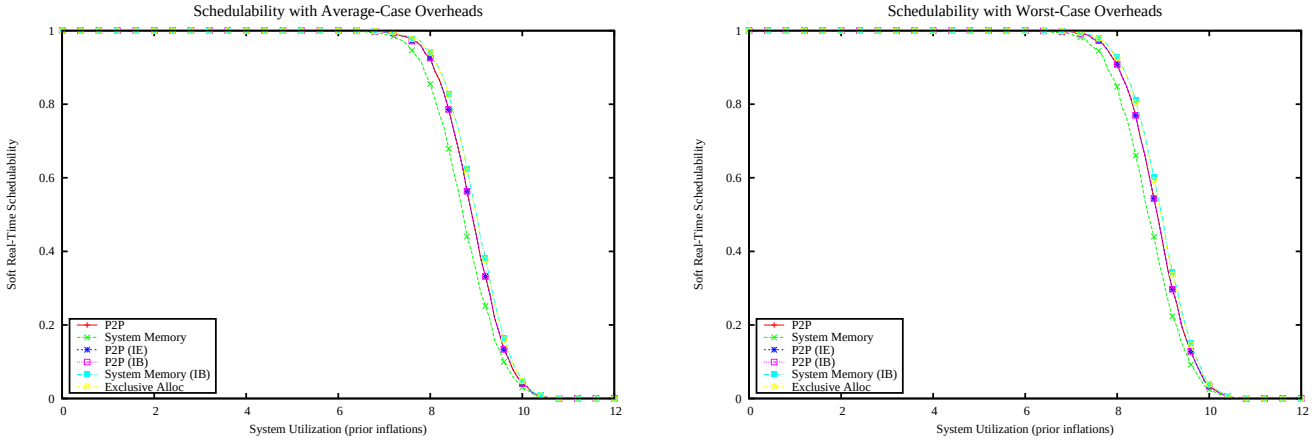

Figure 7561: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

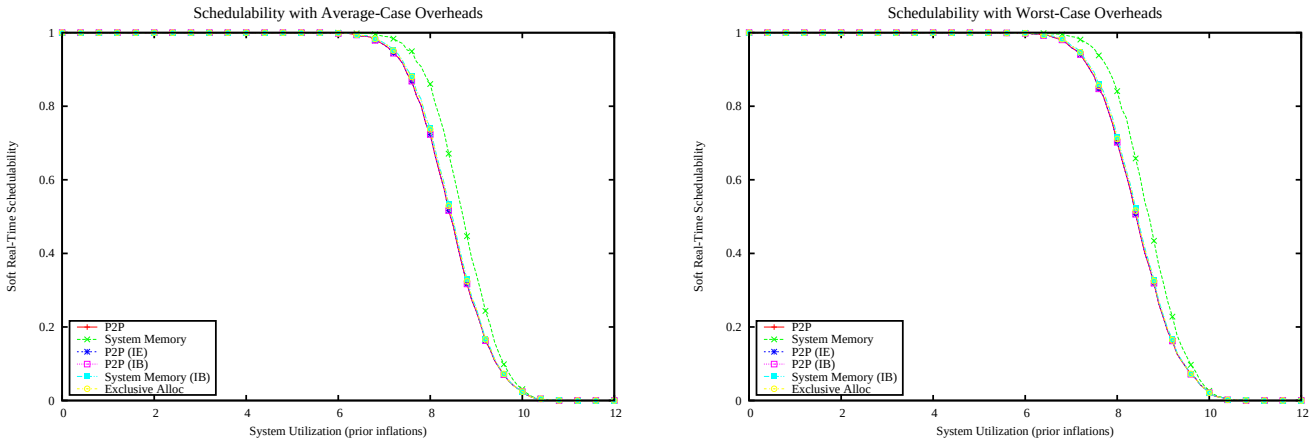

Figure 7562: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

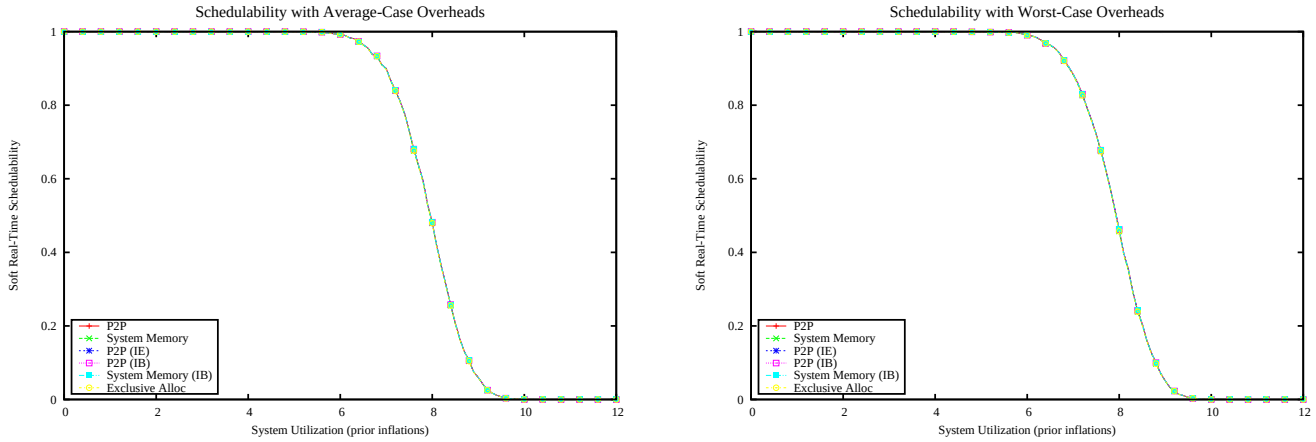

Figure 7563: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

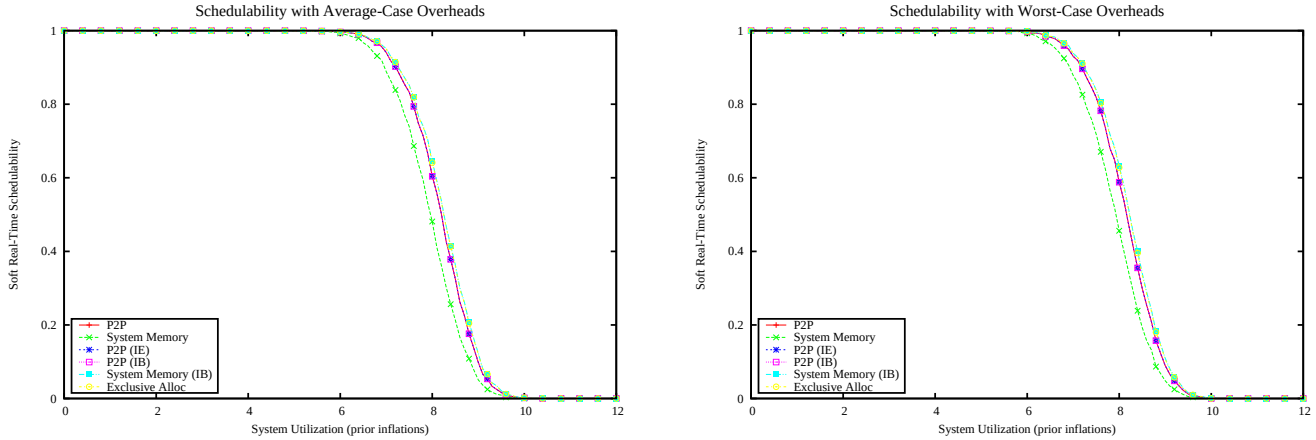

Figure 7564: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

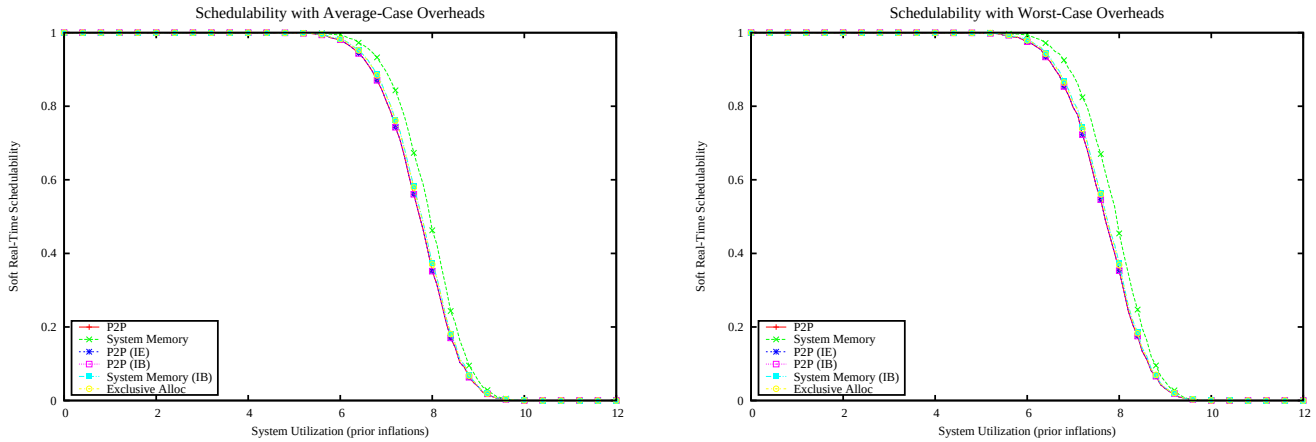

Figure 7565: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

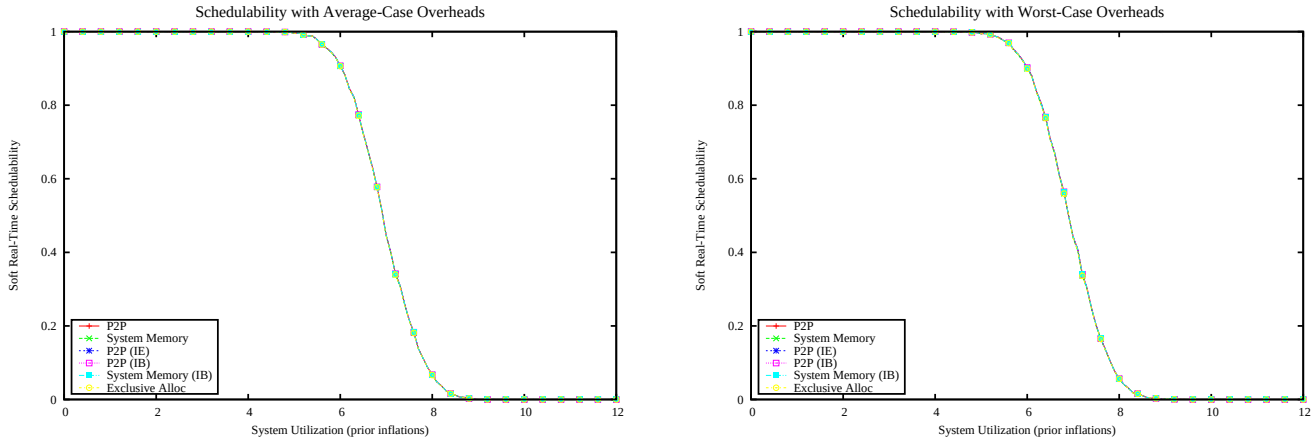

Figure 7566: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

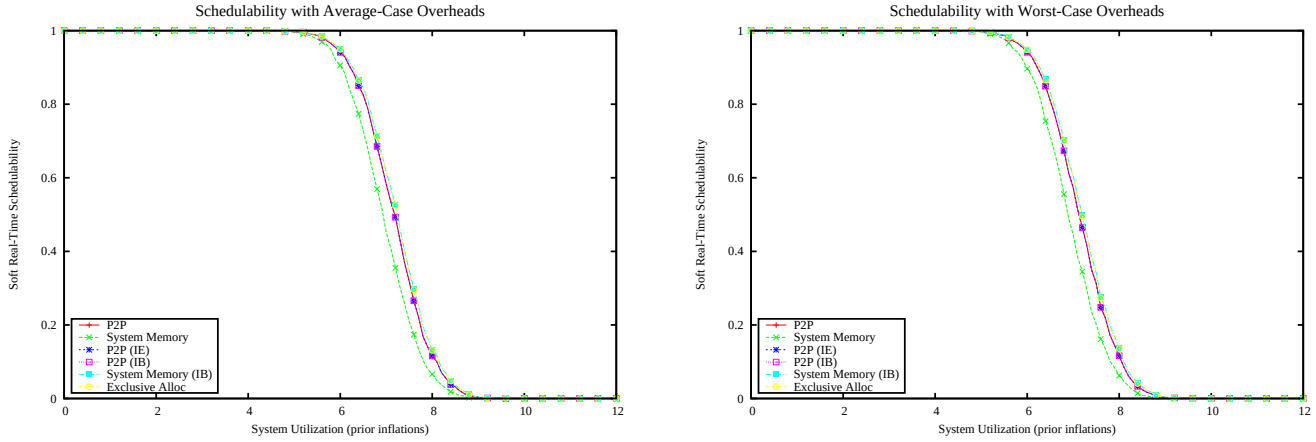

Figure 7567: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

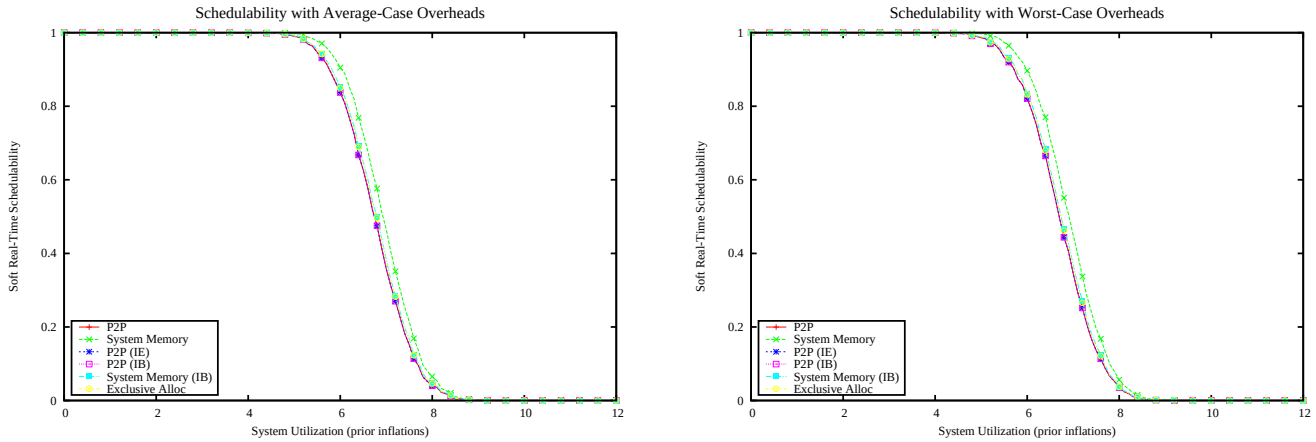

Figure 7568: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

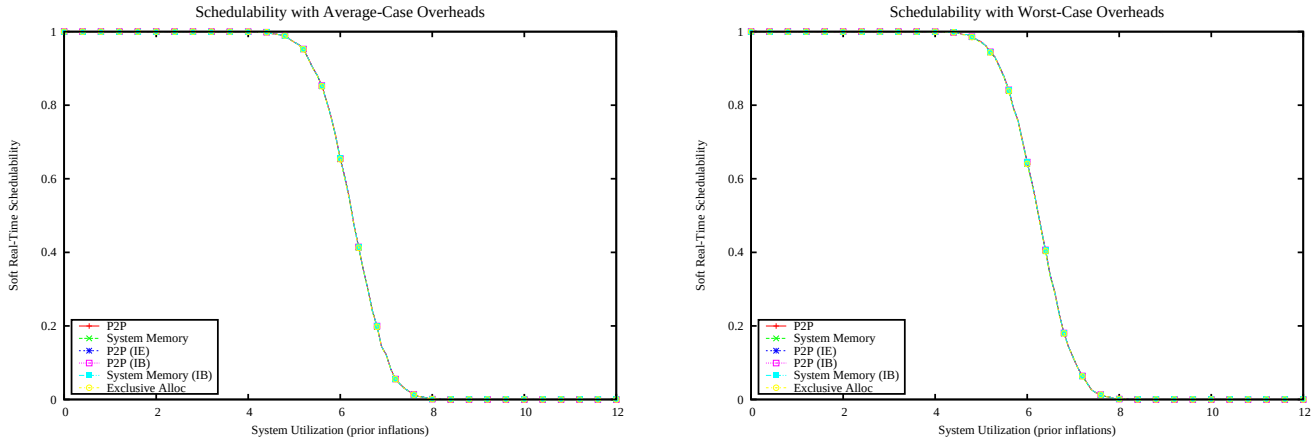

Figure 7569: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

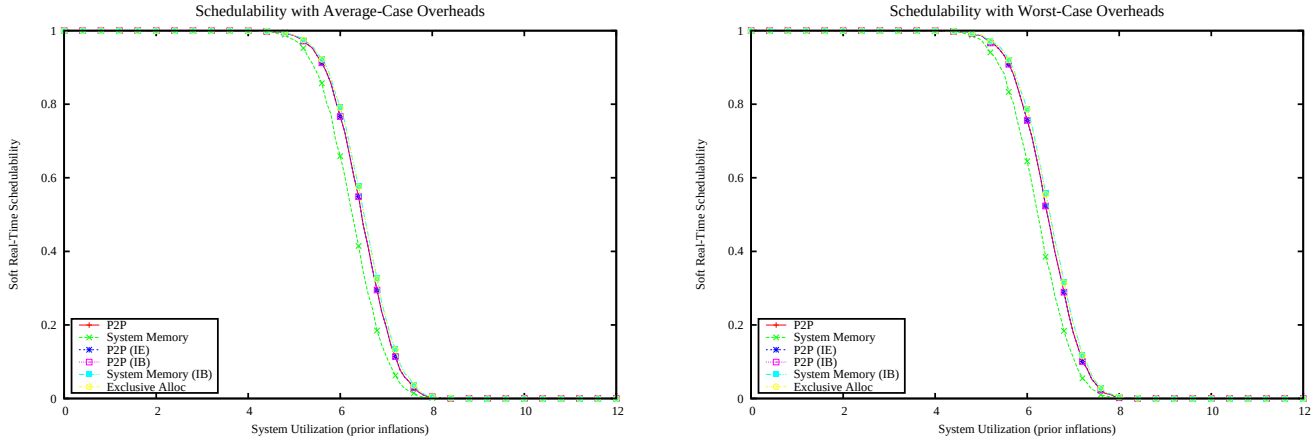

Figure 7570: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

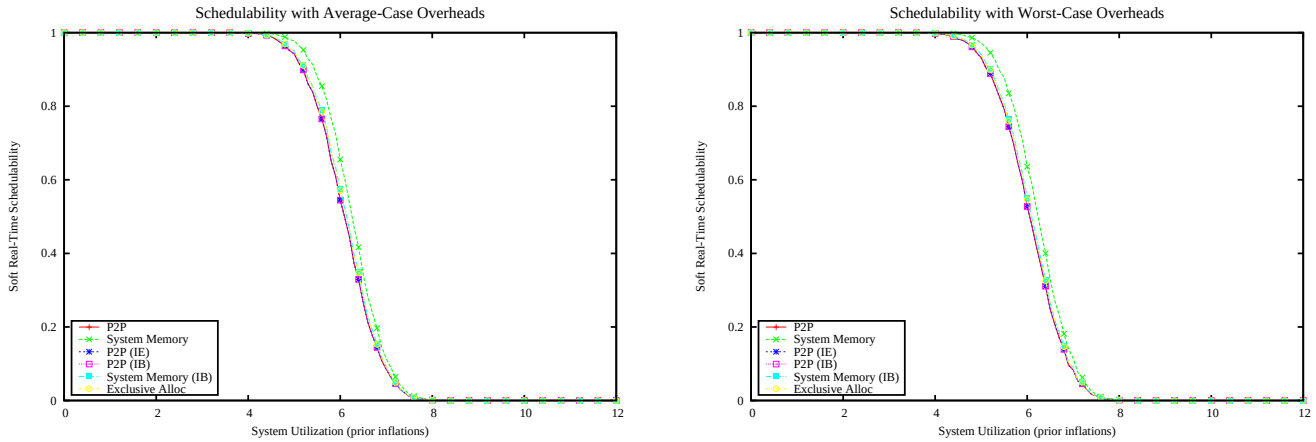

Figure 7571: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

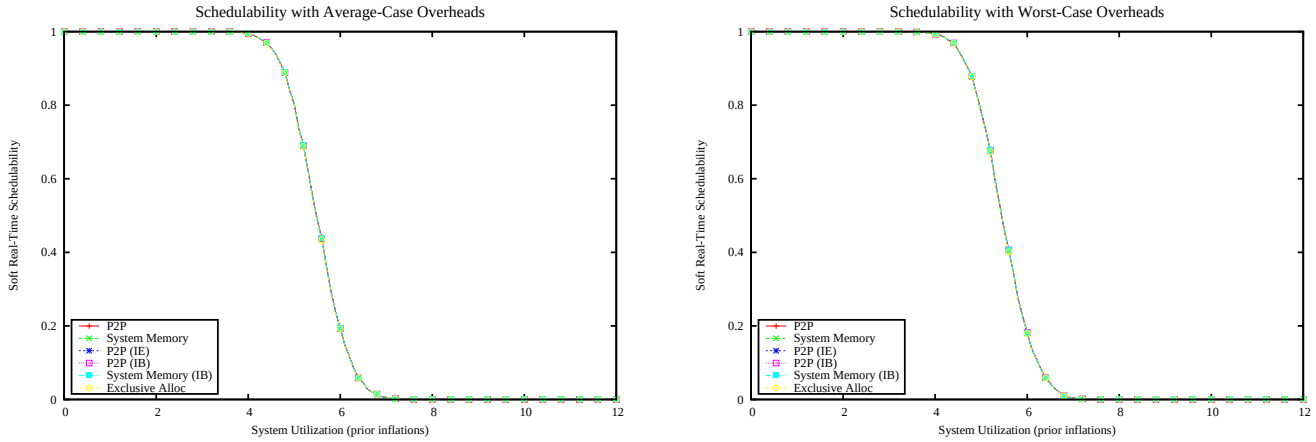

Figure 7572: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

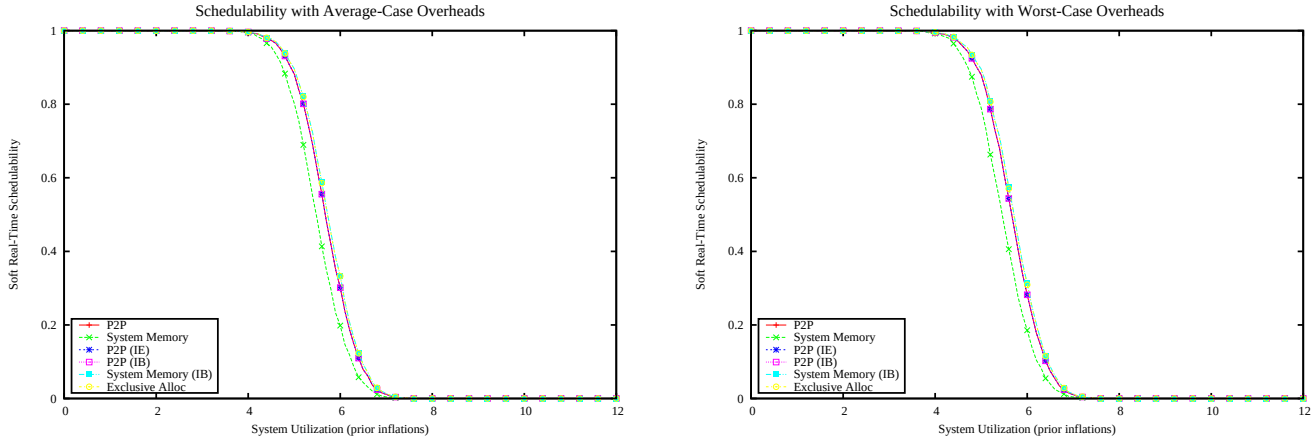

Figure 7573: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

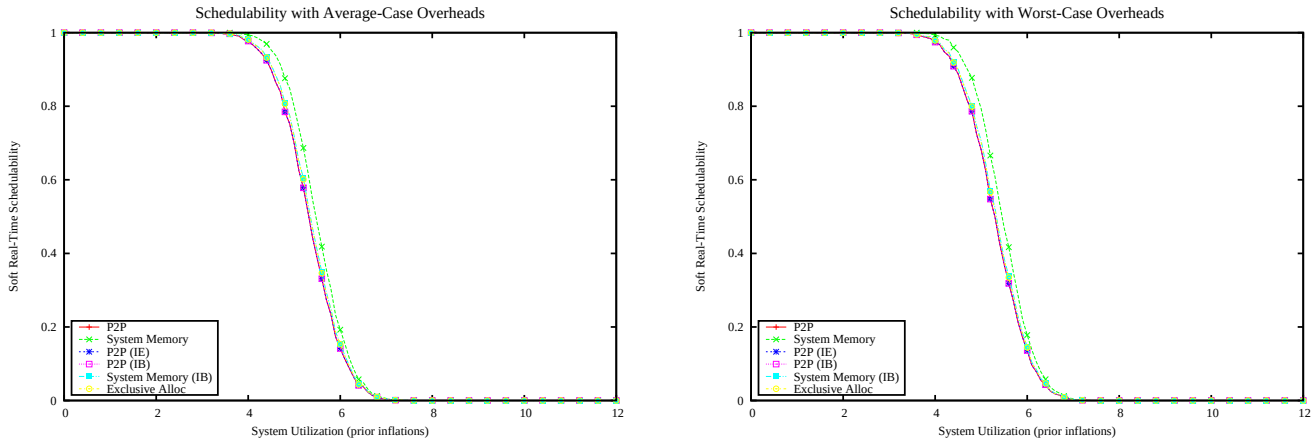

Figure 7574: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 4MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

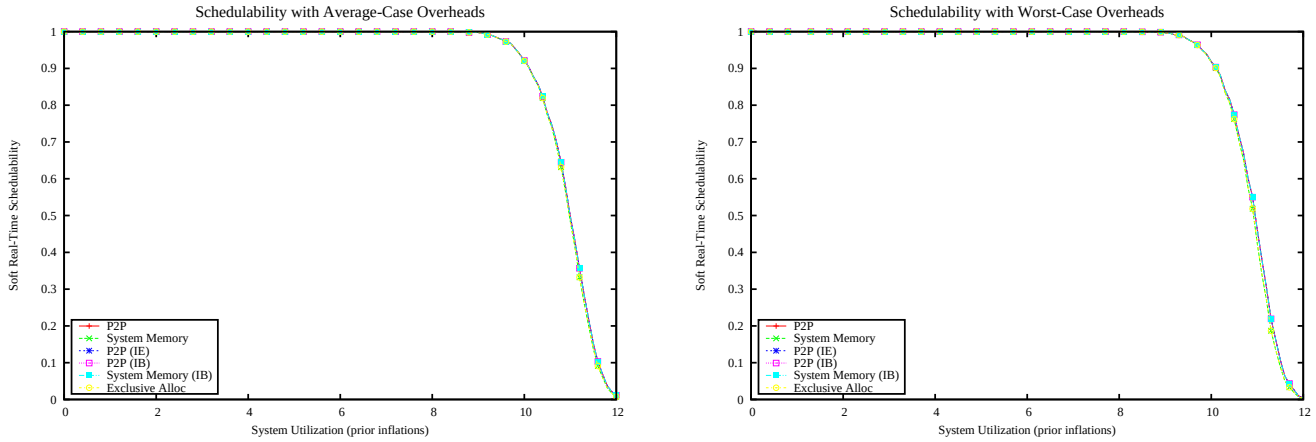

Figure 7575: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

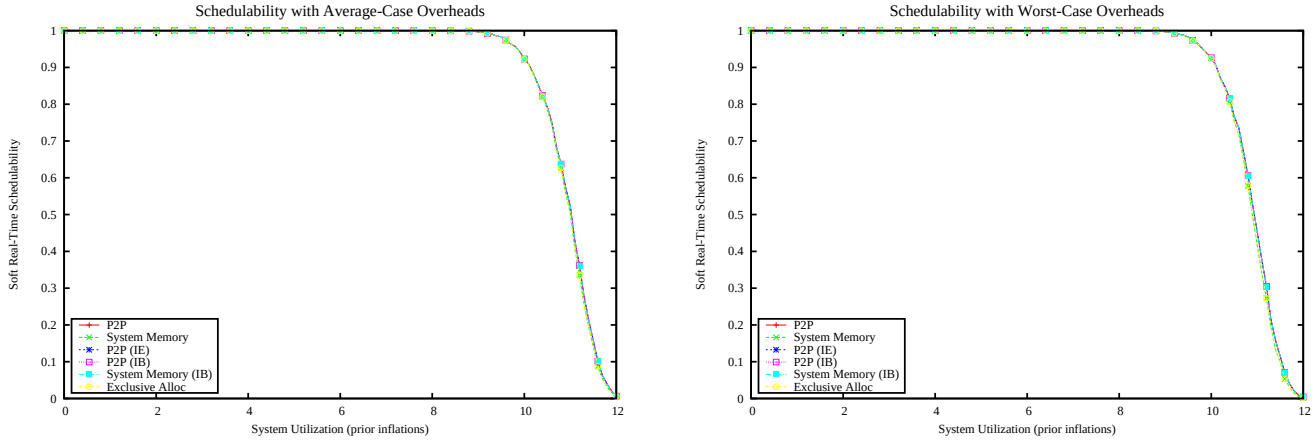

Figure 7576: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

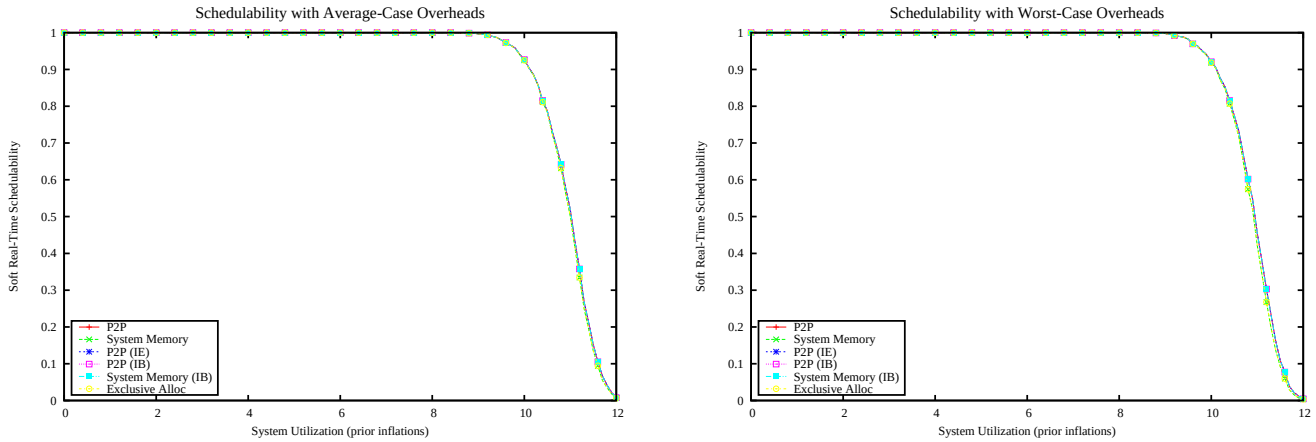

Figure 7577: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

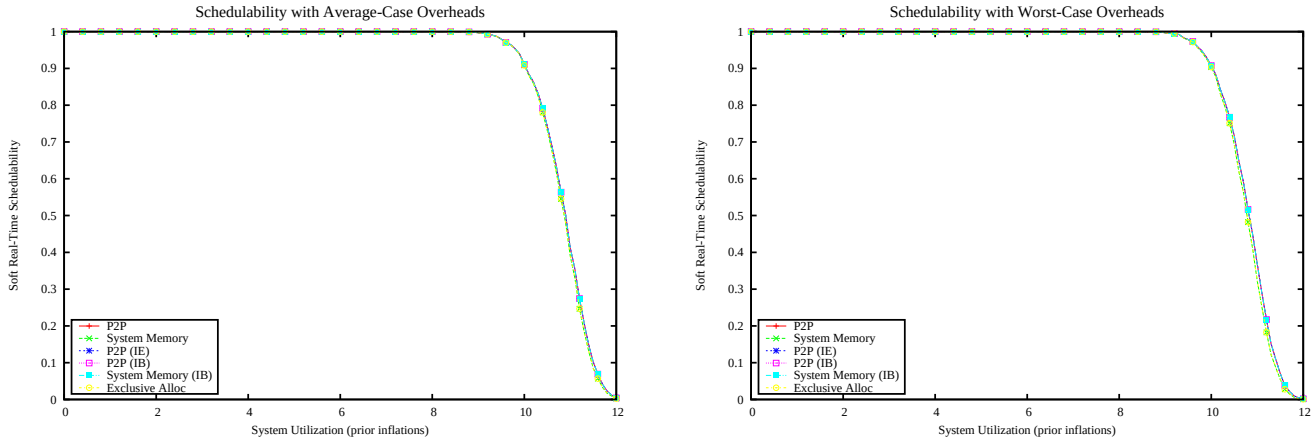

Figure 7578: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

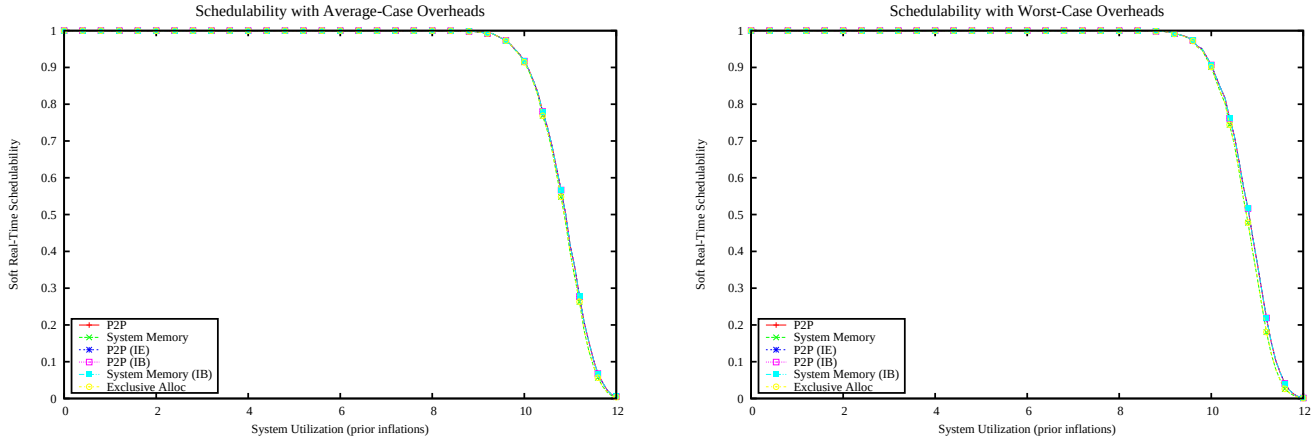

Figure 7579: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

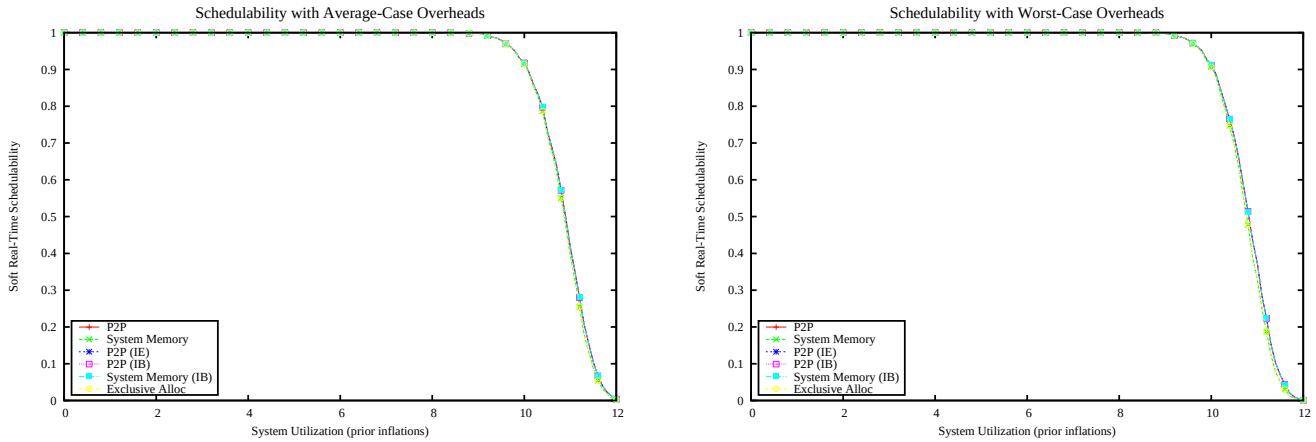

Figure 7580: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

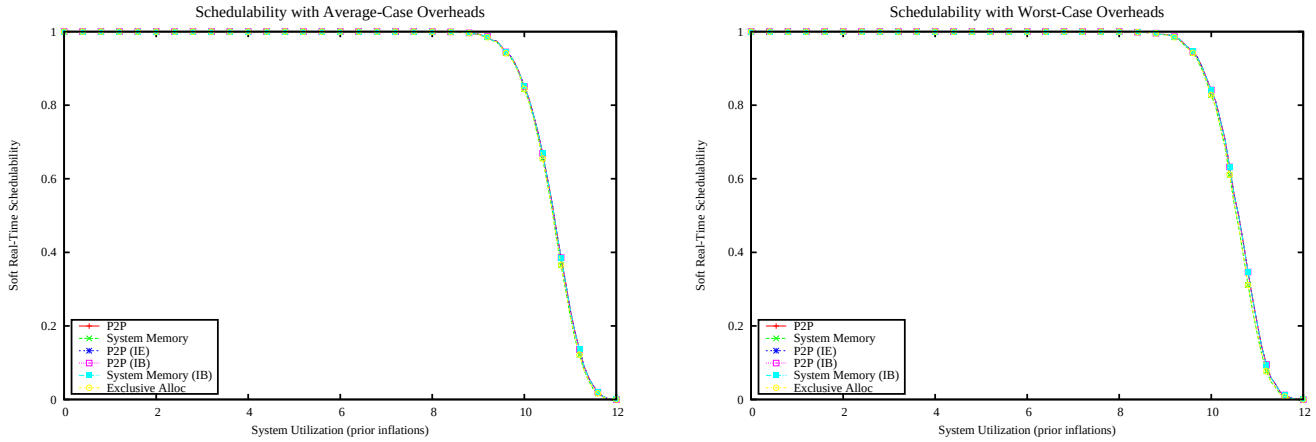

Figure 7581: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

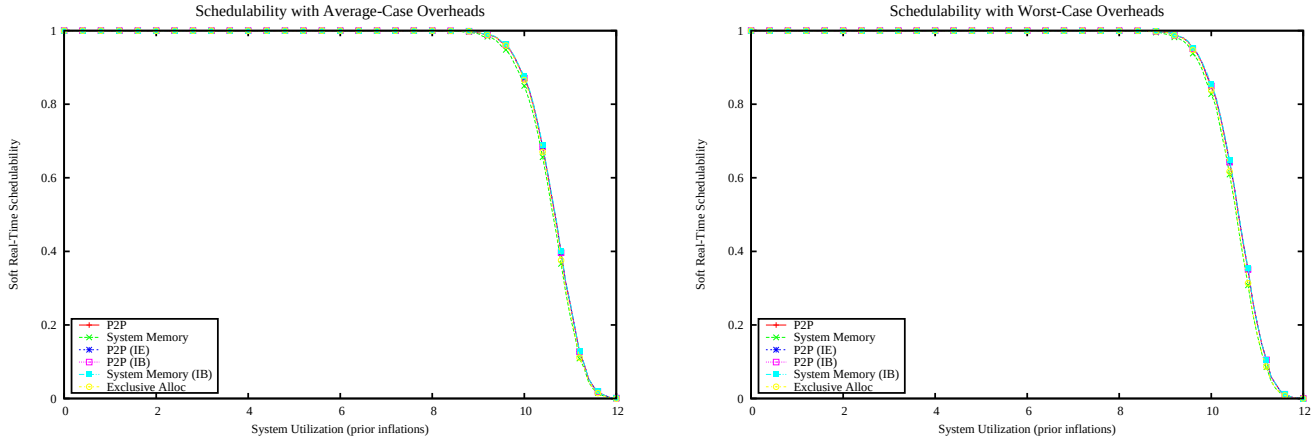

Figure 7582: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

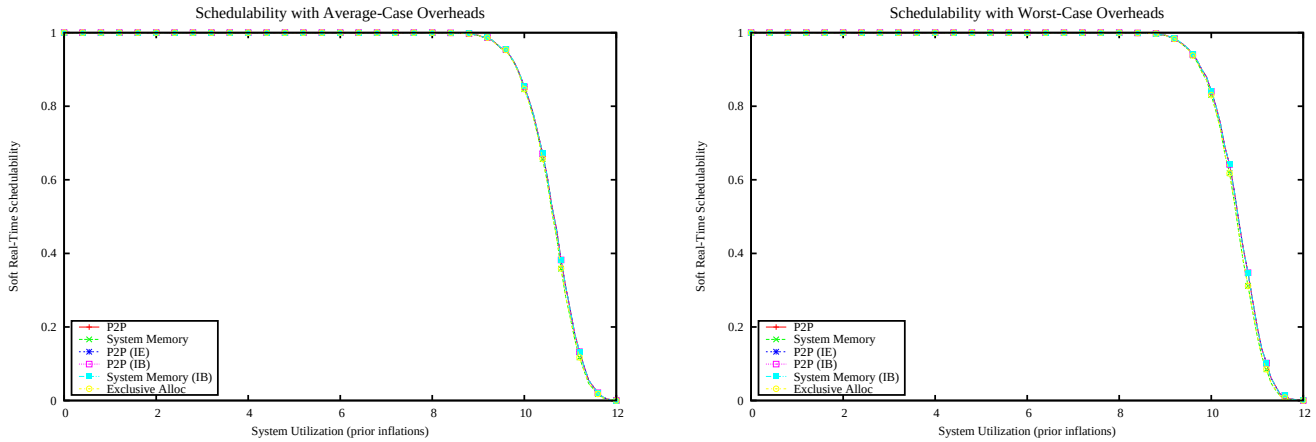

Figure 7583: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

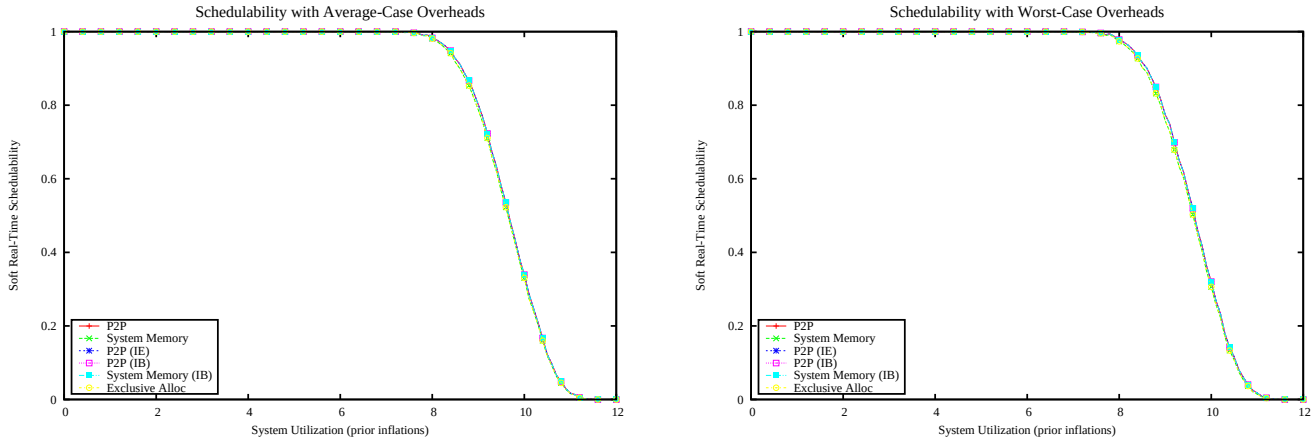

Figure 7584: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

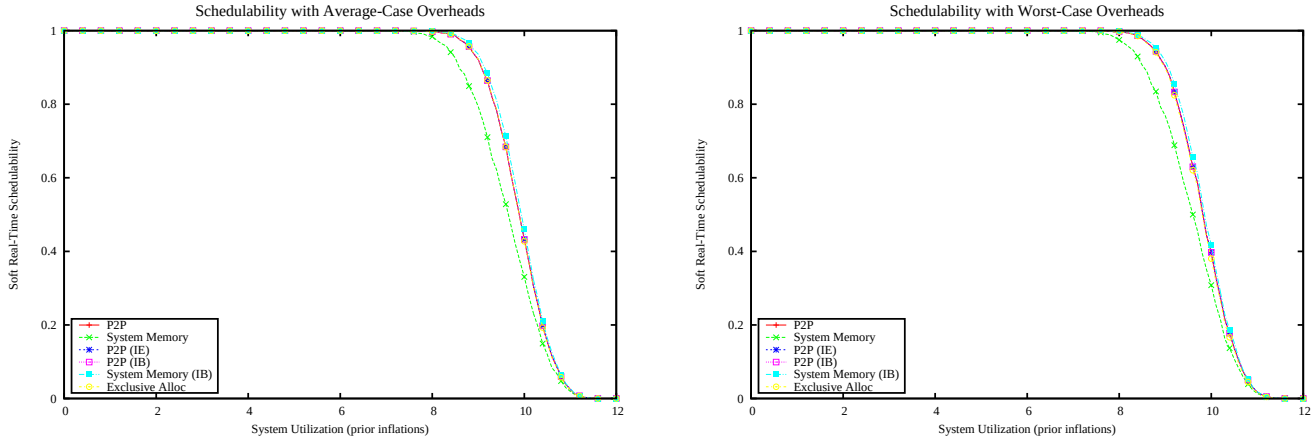

Figure 7585: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

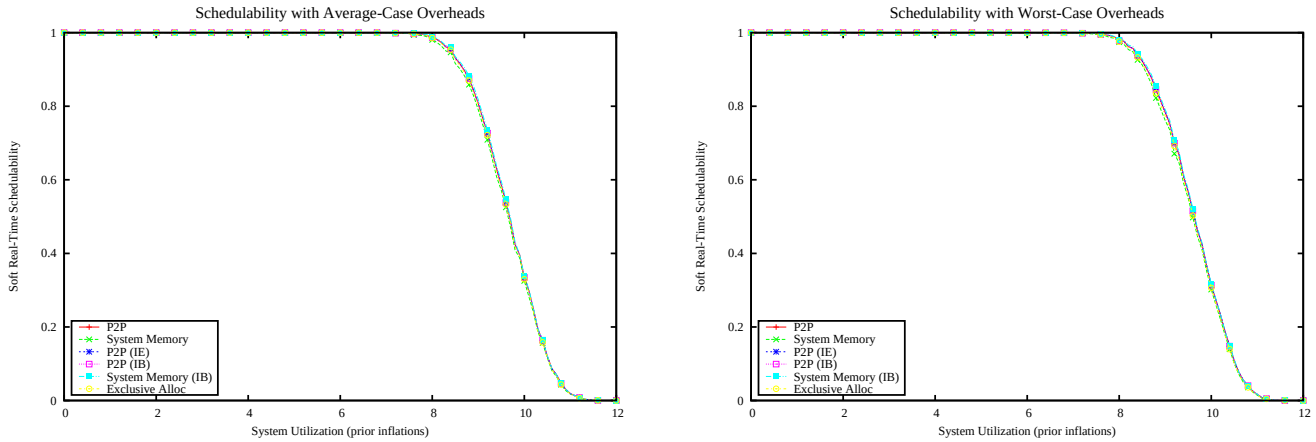

Figure 7586: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

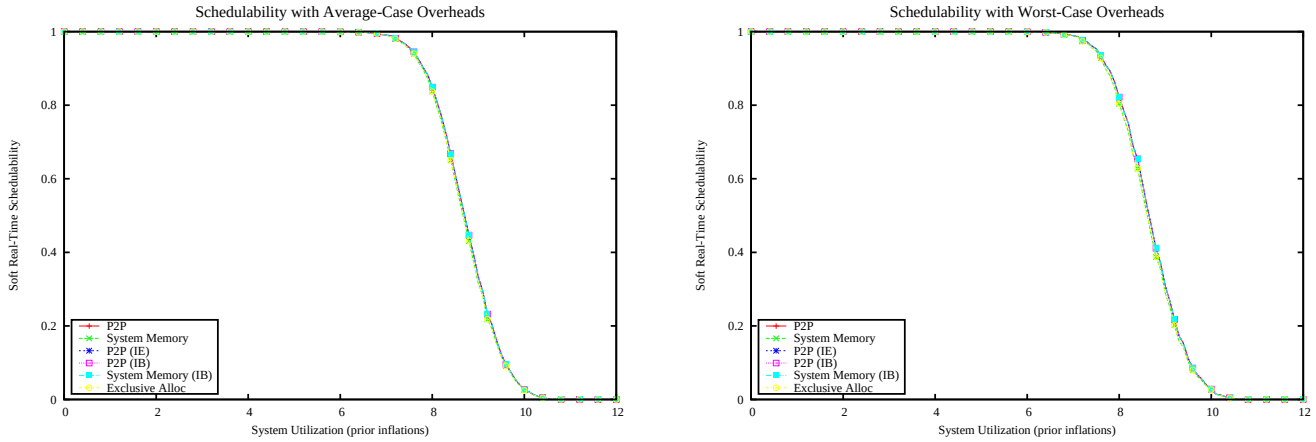

Figure 7587: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

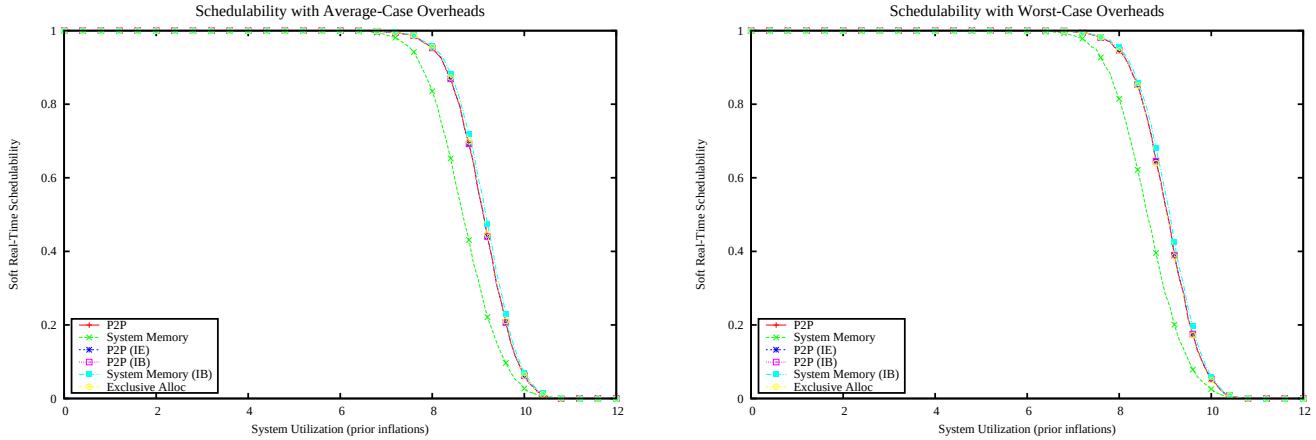

Figure 7588: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

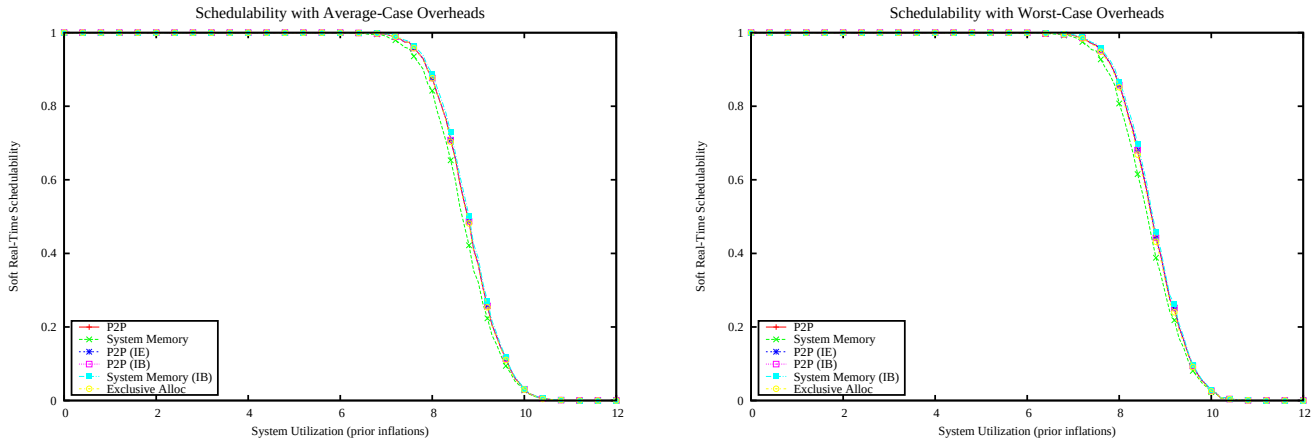

Figure 7589: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

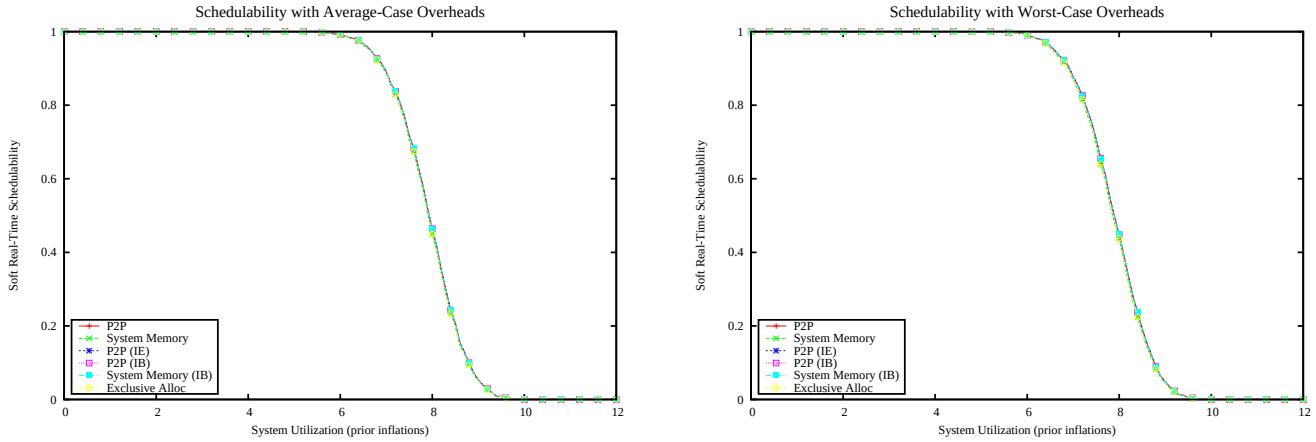

Figure 7590: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

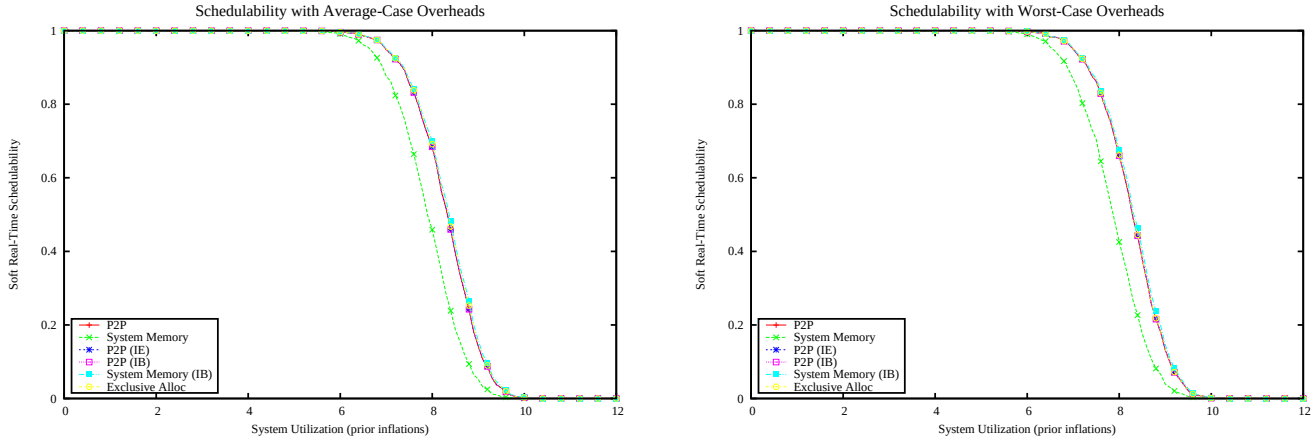

Figure 7591: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

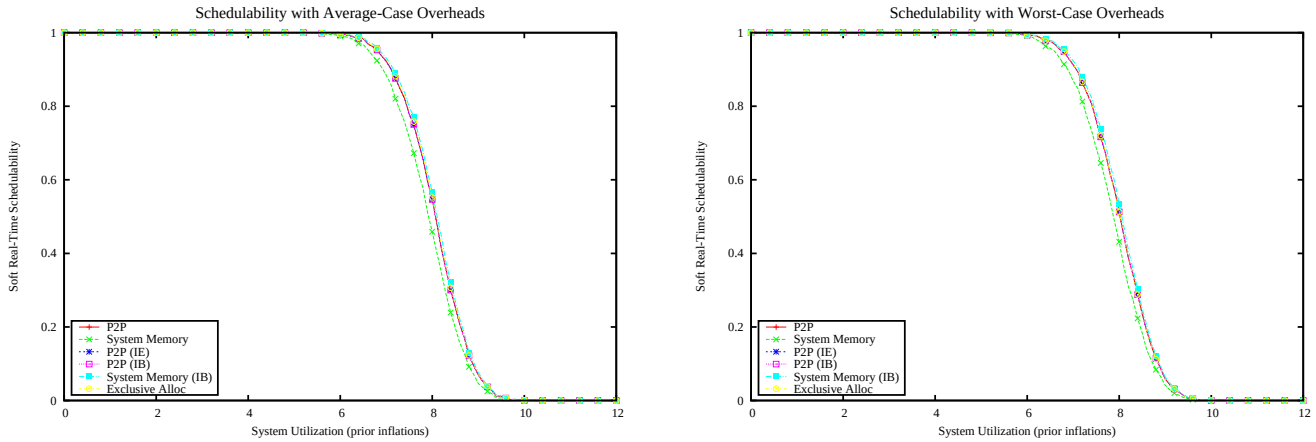

Figure 7592: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

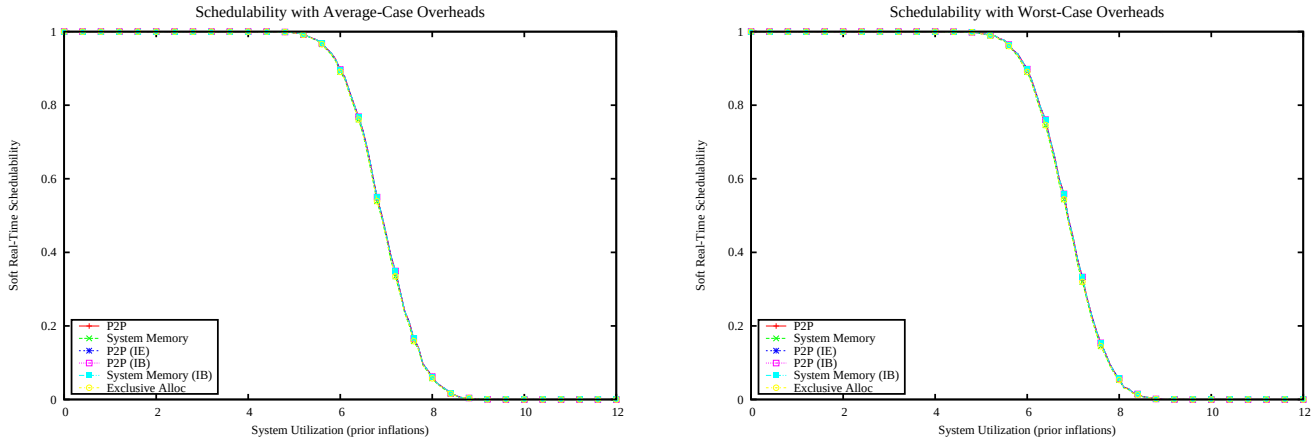

Figure 7593: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

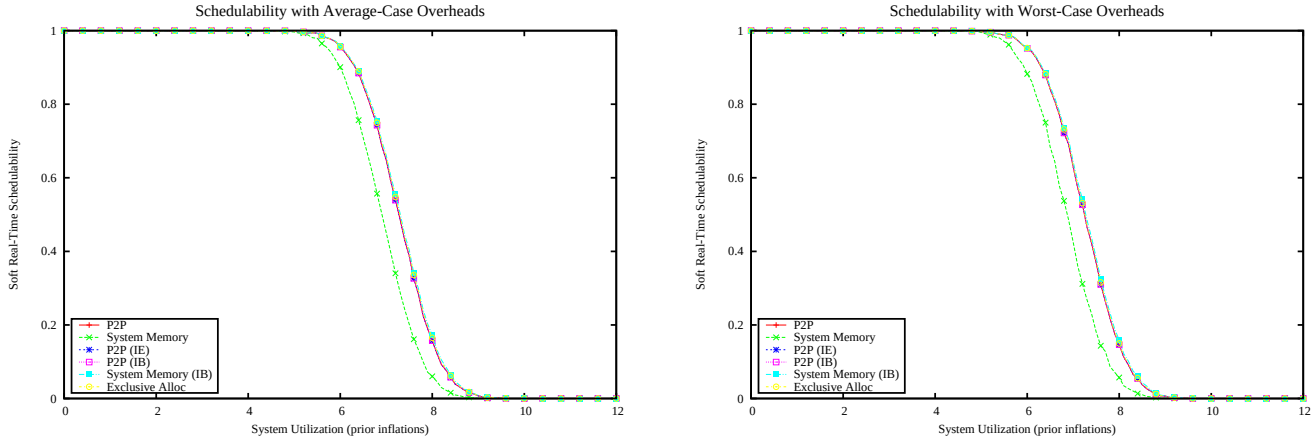

Figure 7594: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

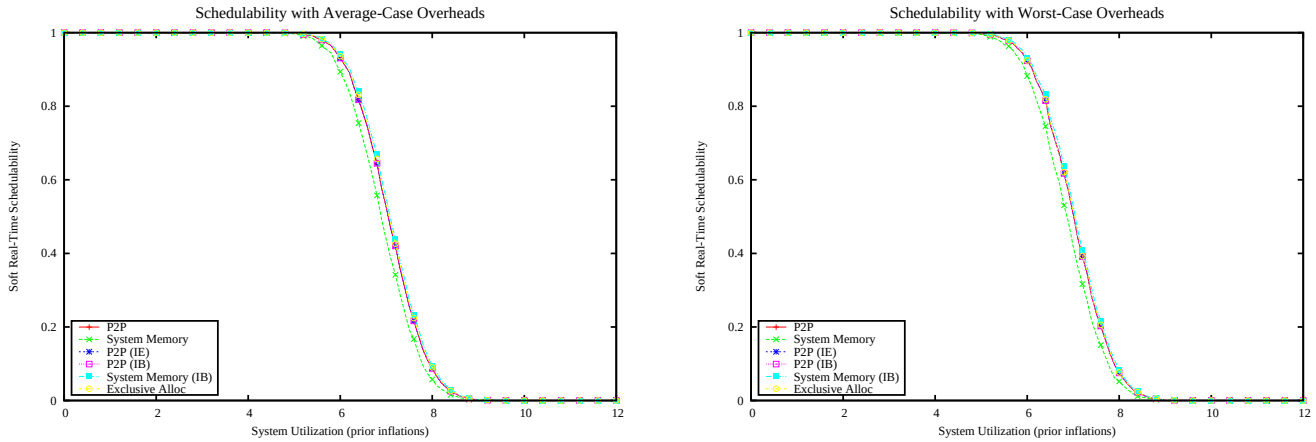

Figure 7595: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

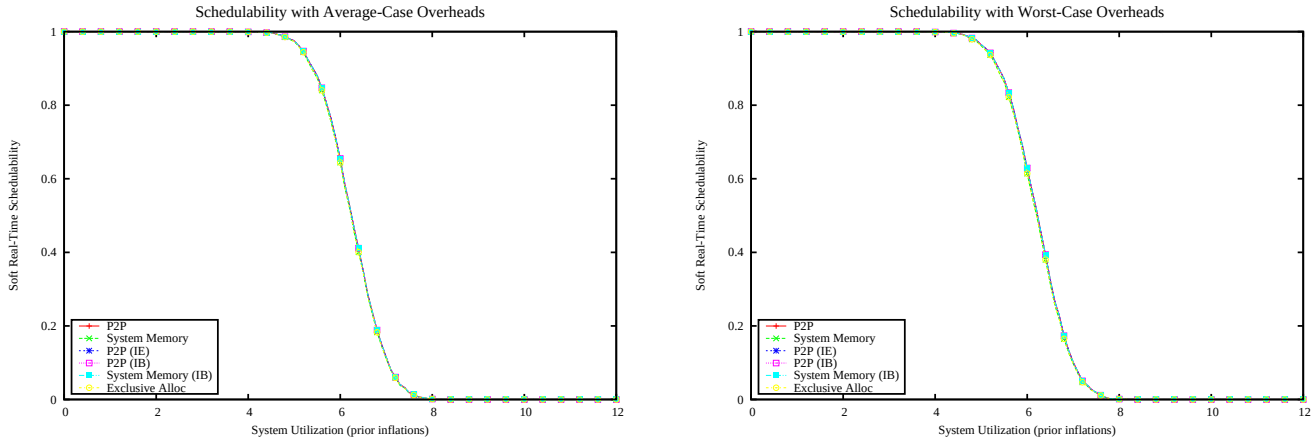

Figure 7596: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

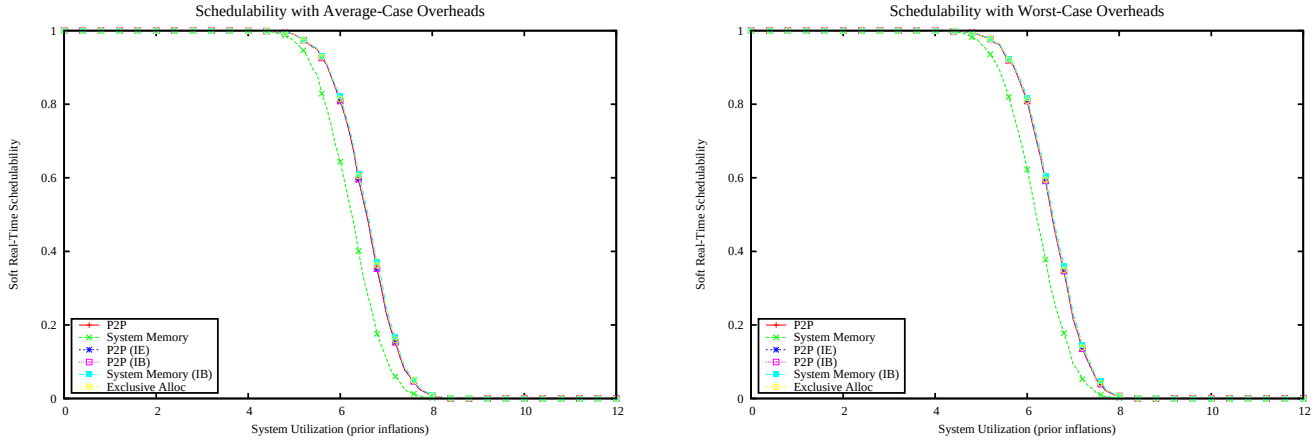

Figure 7597: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

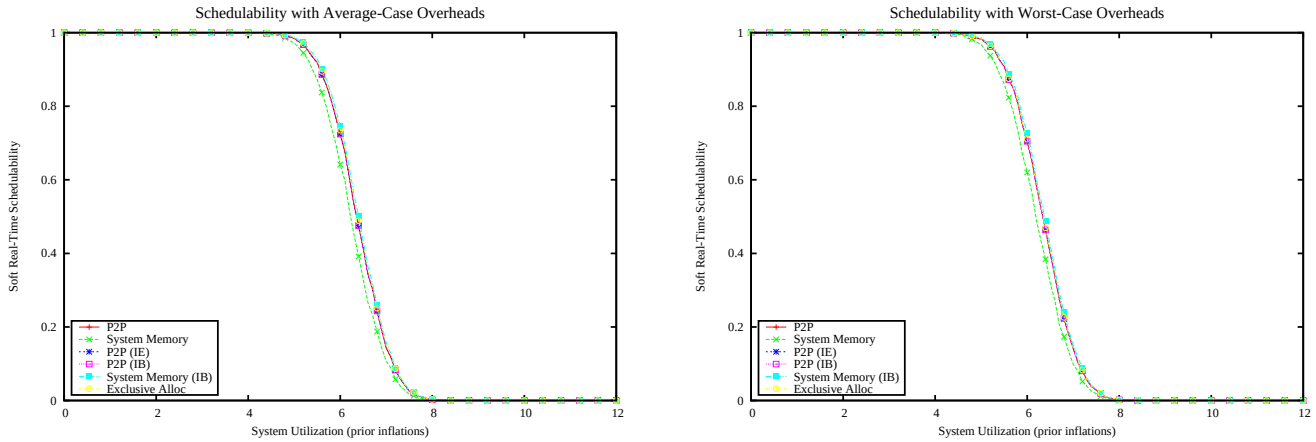

Figure 7598: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

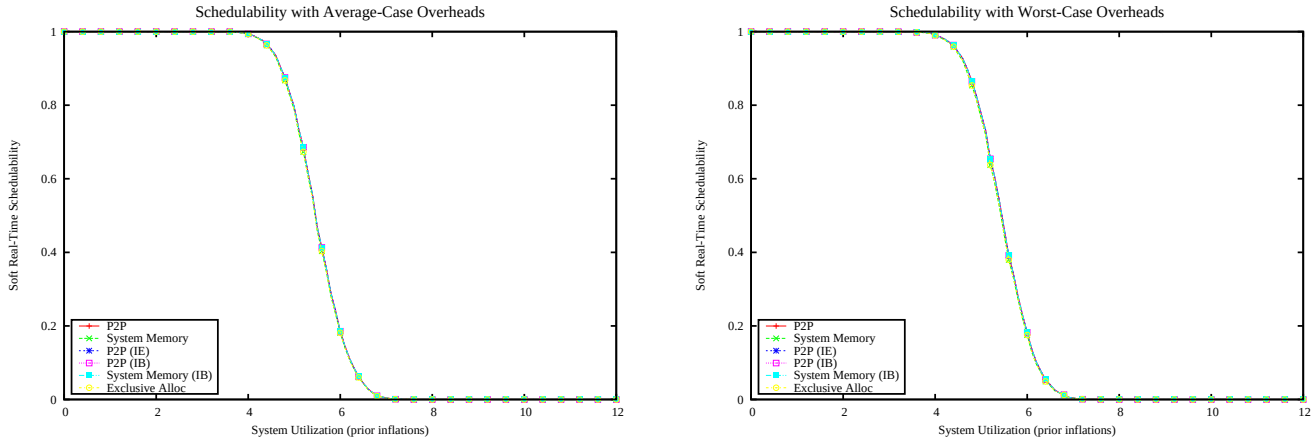

Figure 7599: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

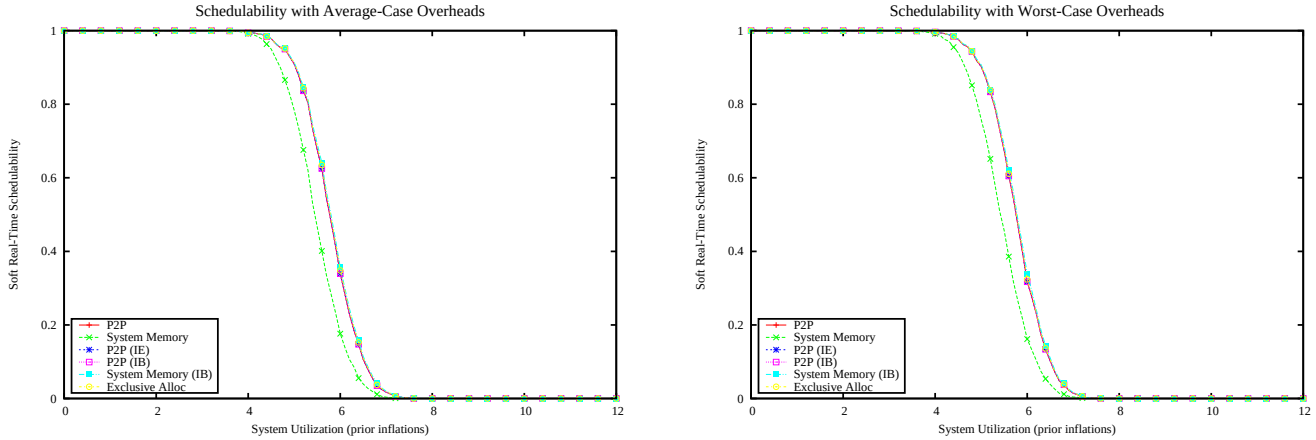

Figure 7600: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

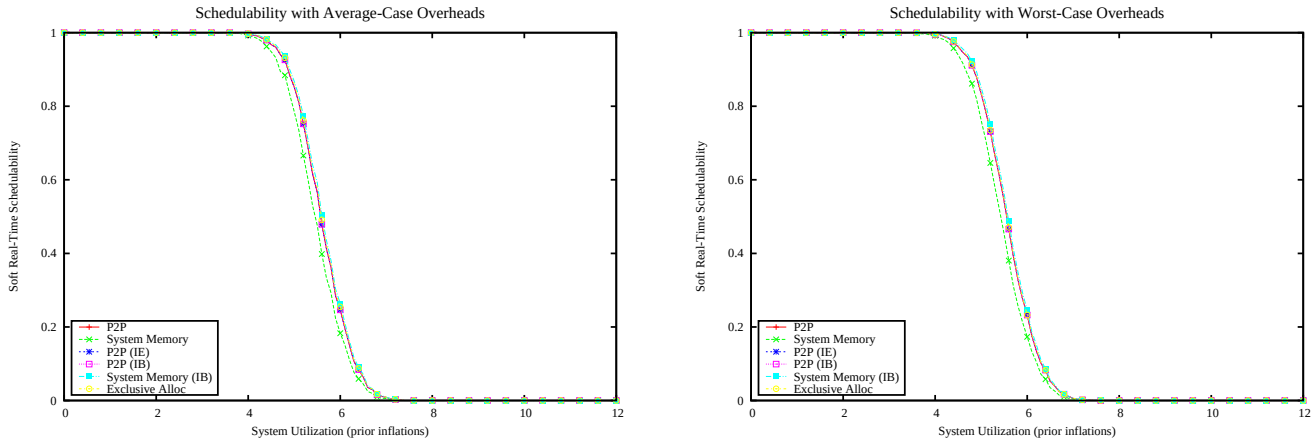

Figure 7601: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

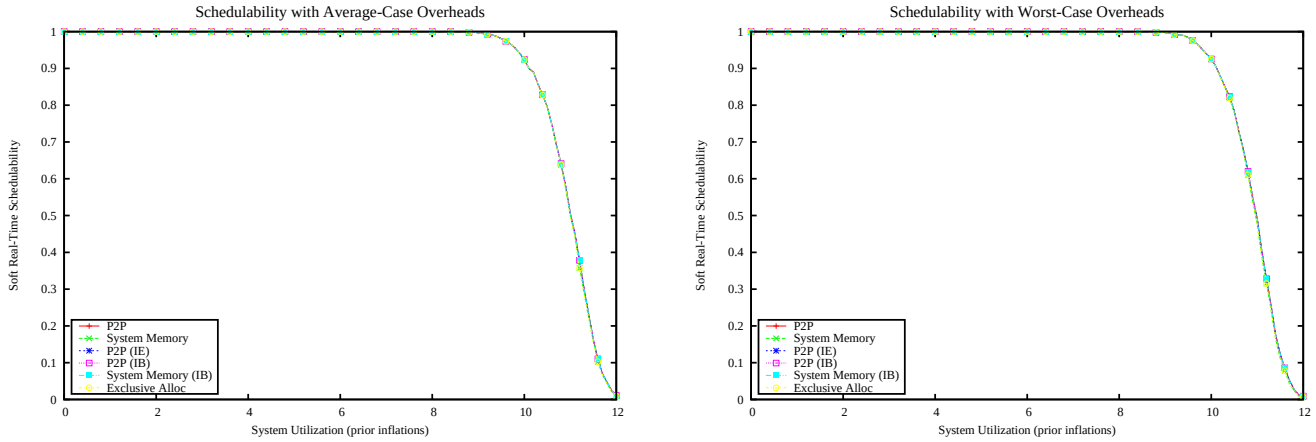

Figure 7602: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

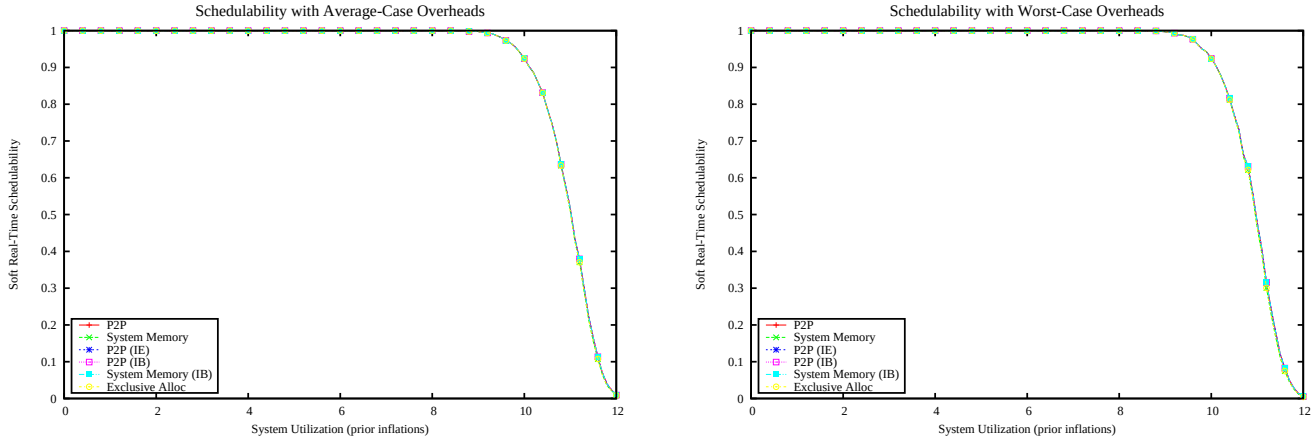

Figure 7603: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

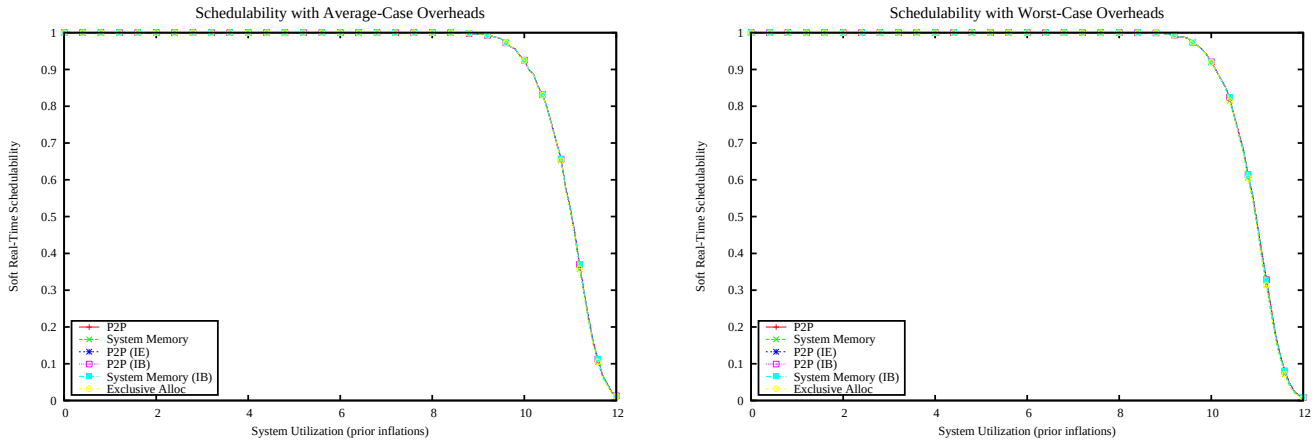

Figure 7604: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

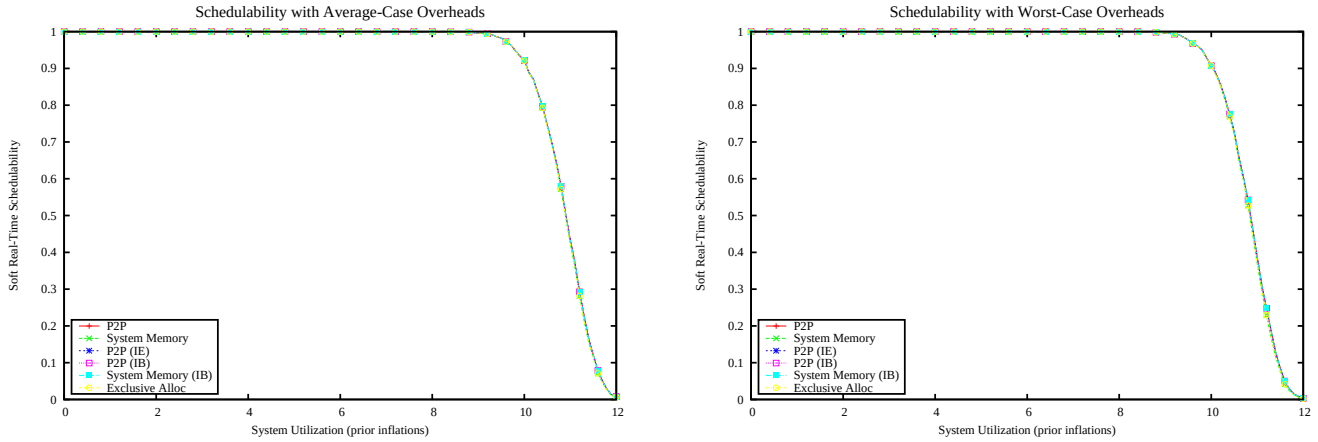

Figure 7605: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

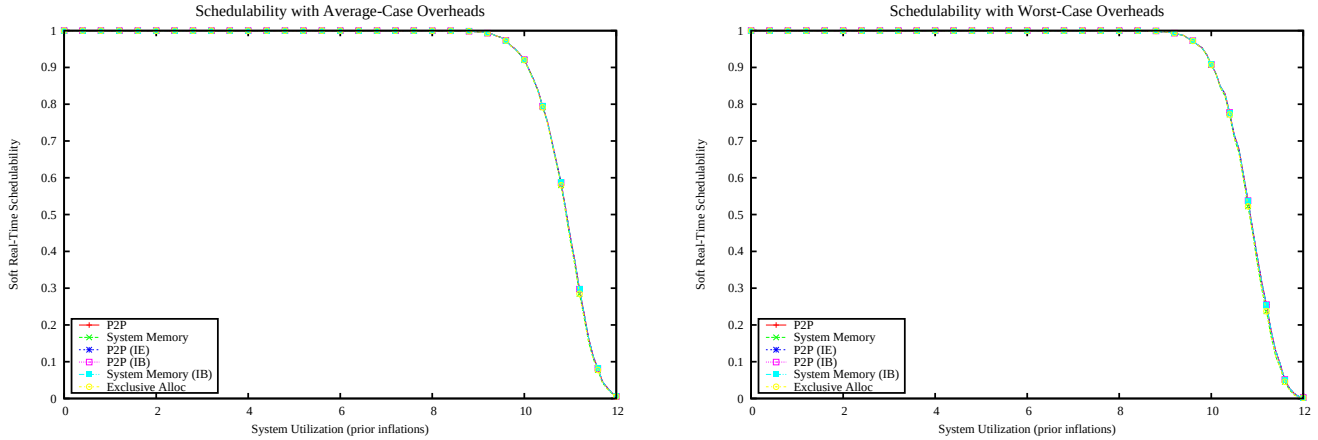

Figure 7606: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

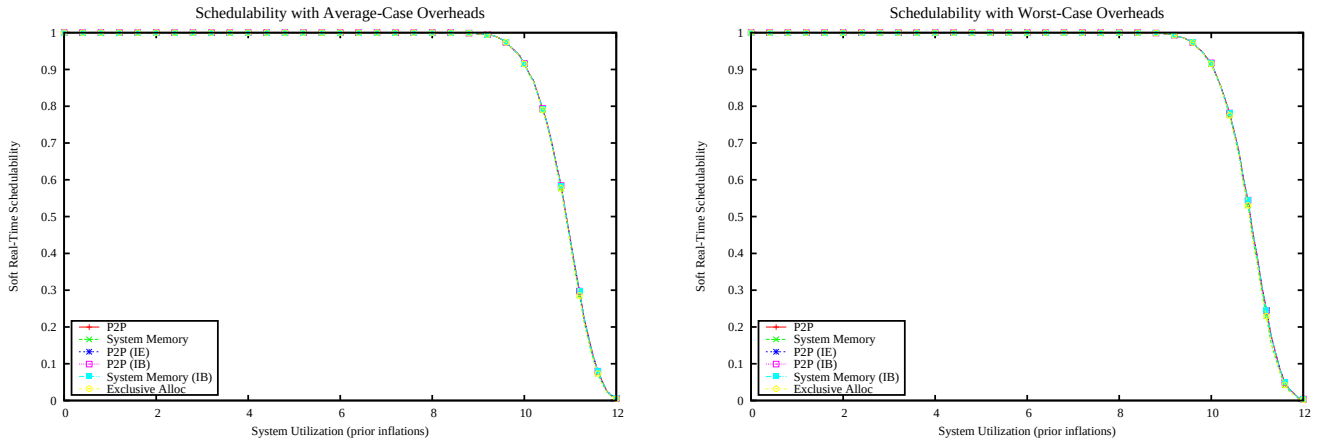

Figure 7607: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

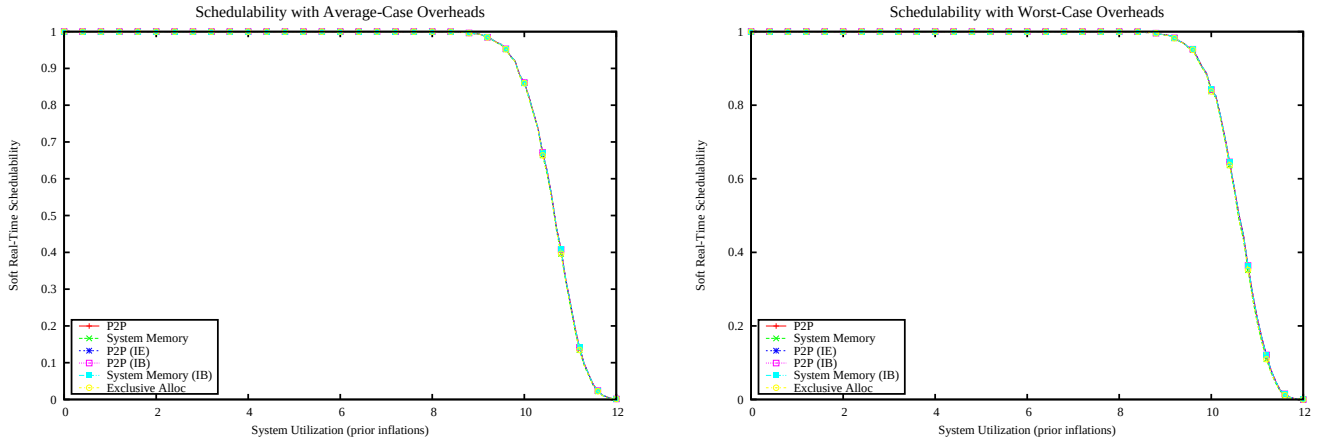

Figure 7608: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

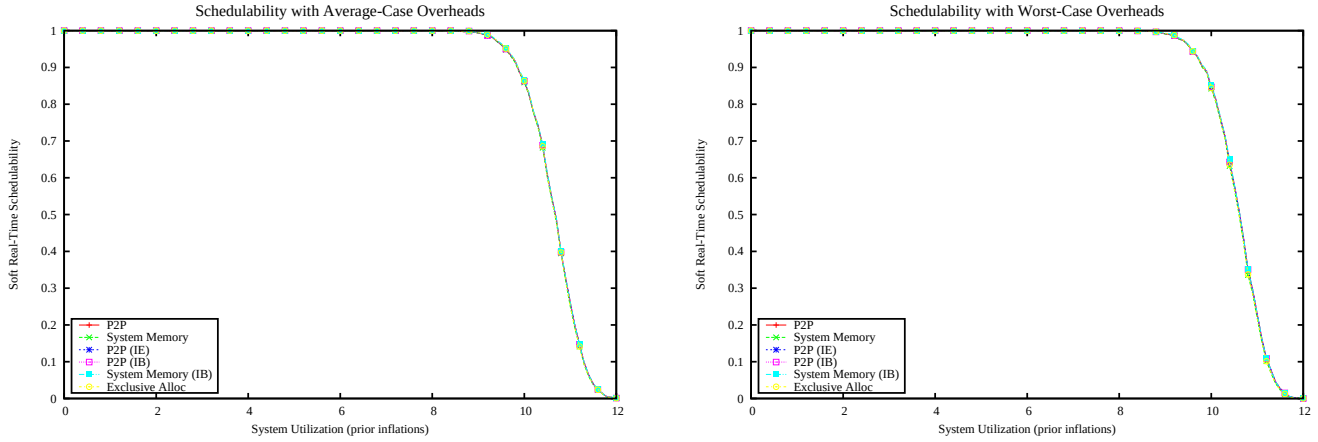

Figure 7609: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

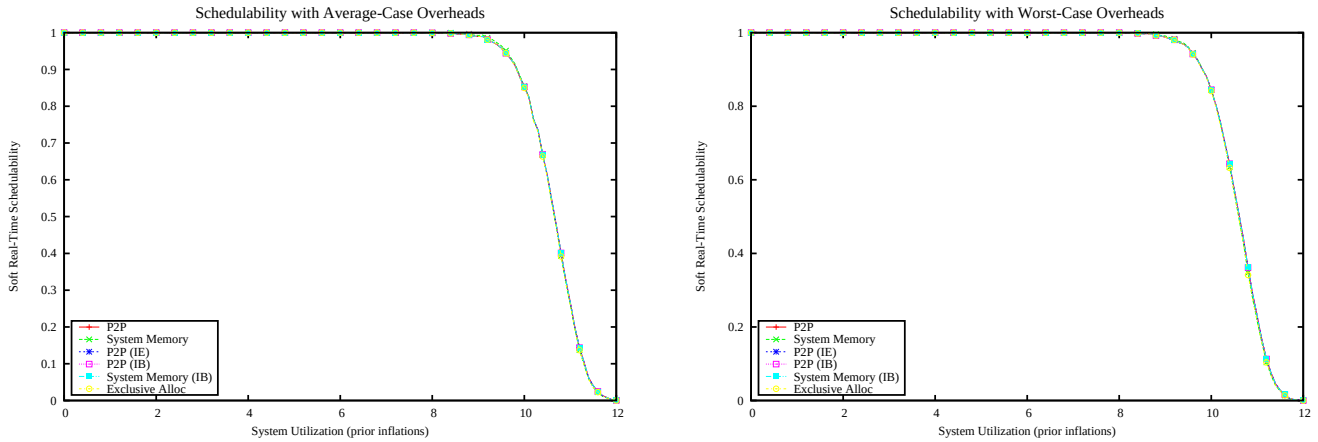

Figure 7610: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

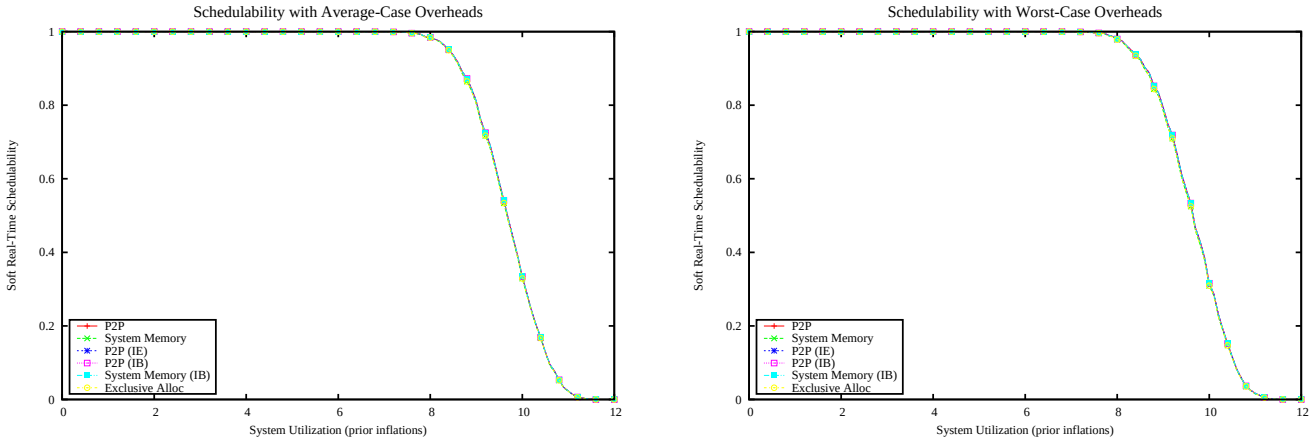

Figure 7611: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

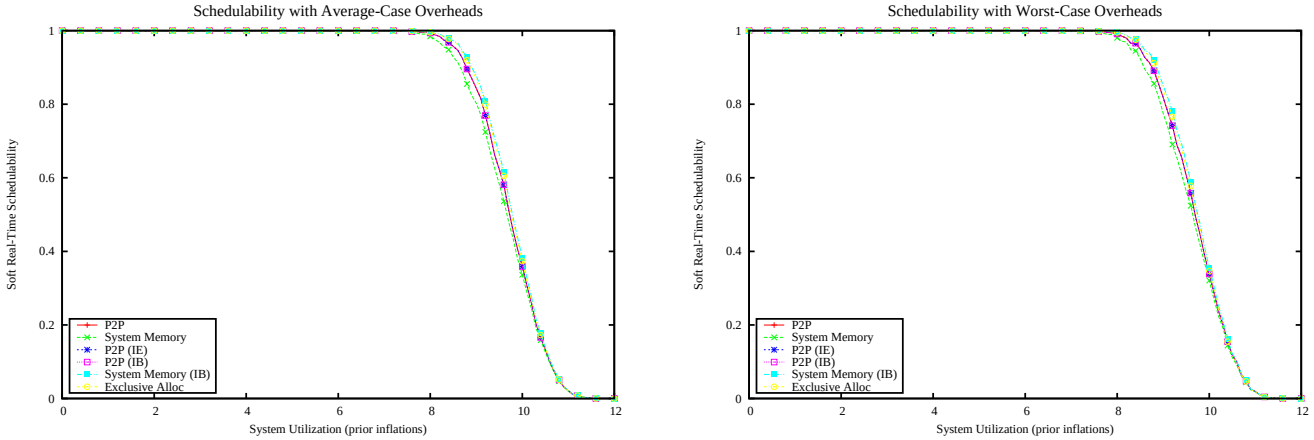

Figure 7612: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

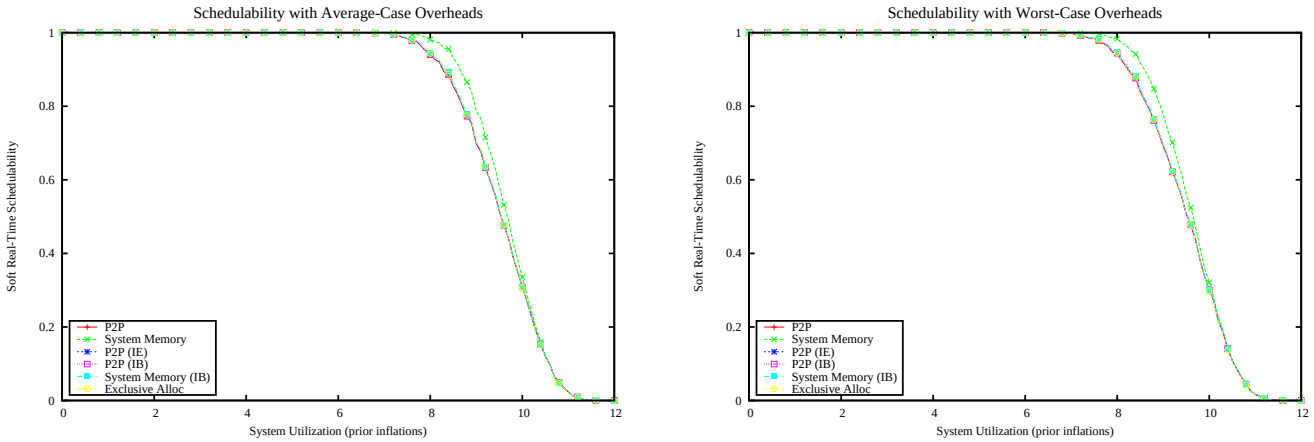

Figure 7613: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

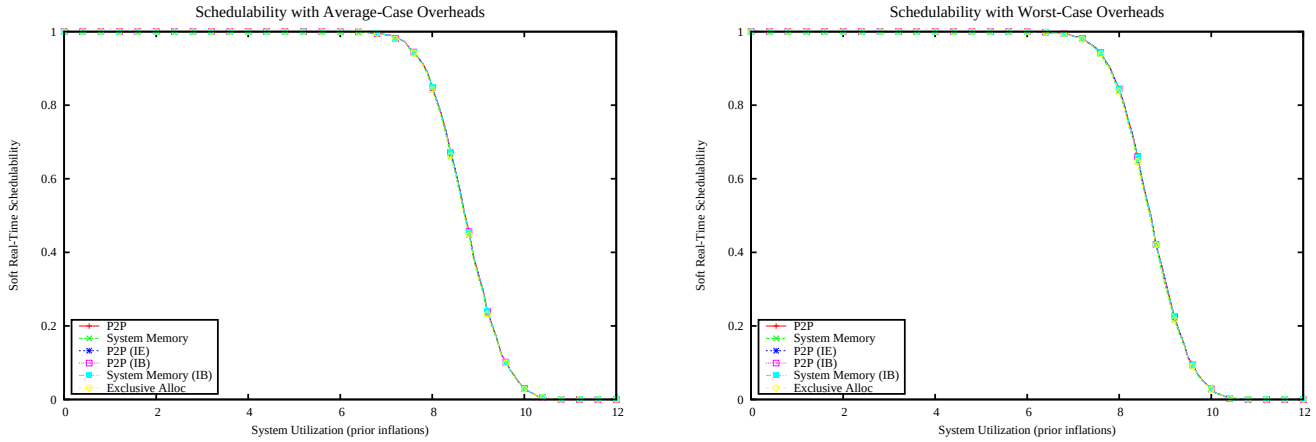

Figure 7614: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

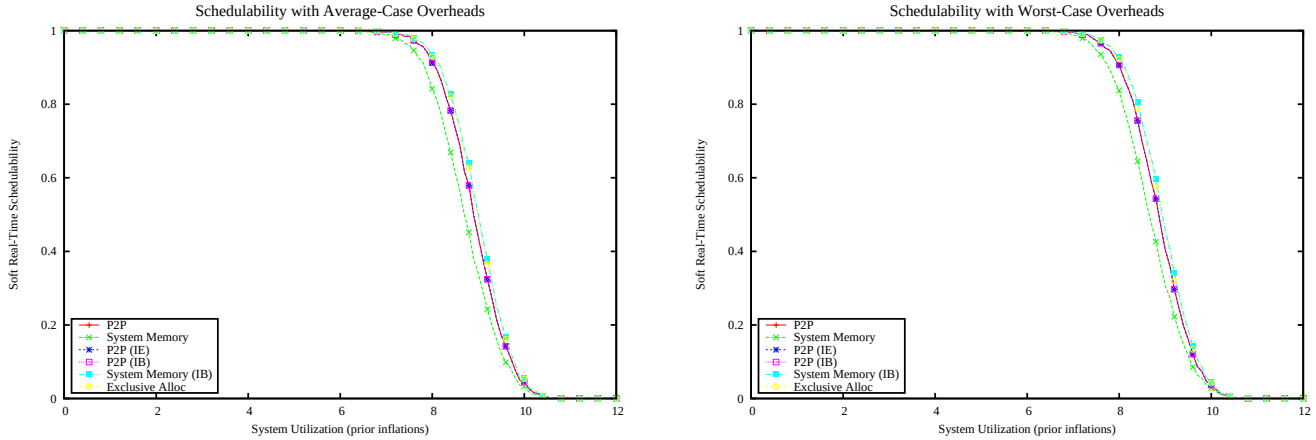

Figure 7615: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

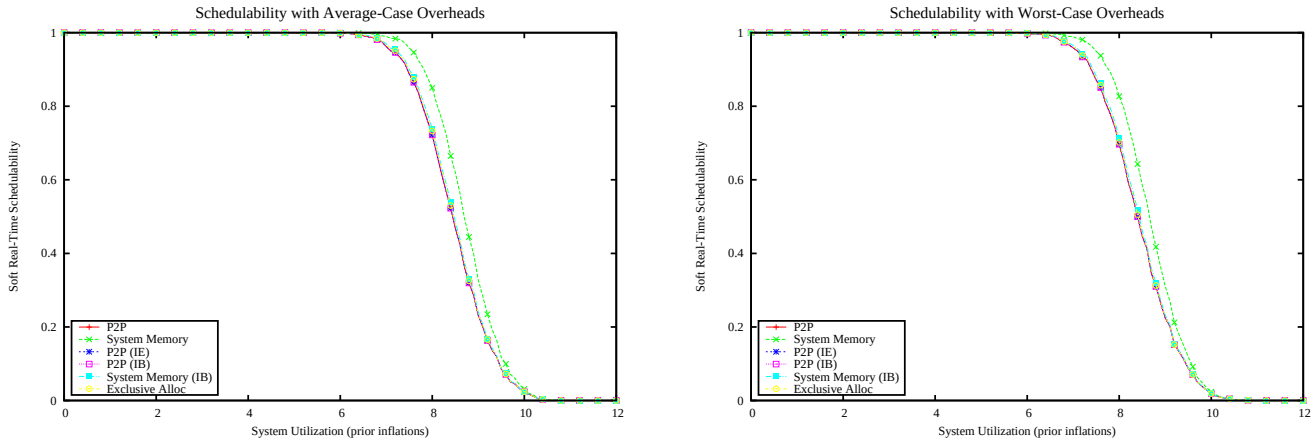

Figure 7616: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

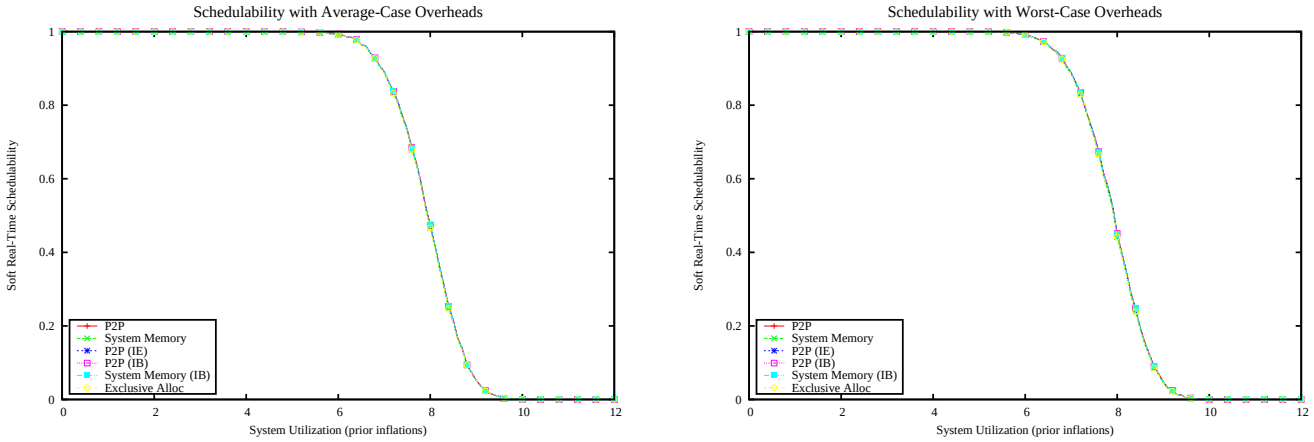

Figure 7617: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

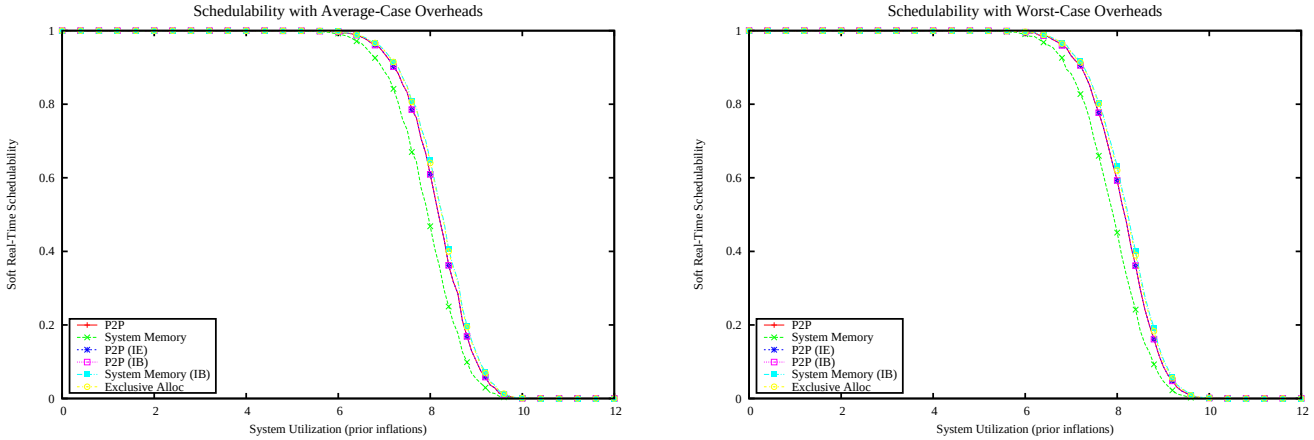

Figure 7618: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

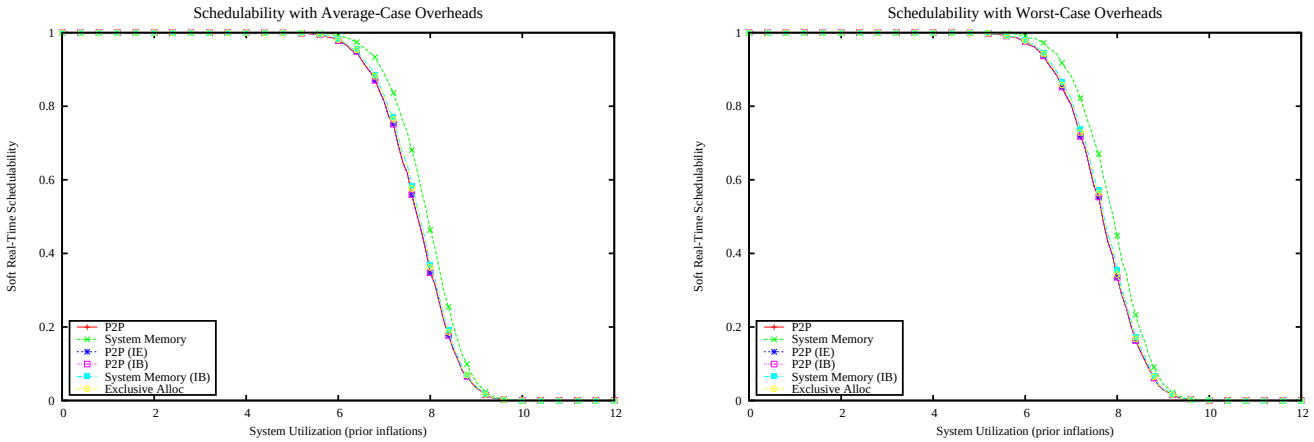

Figure 7619: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

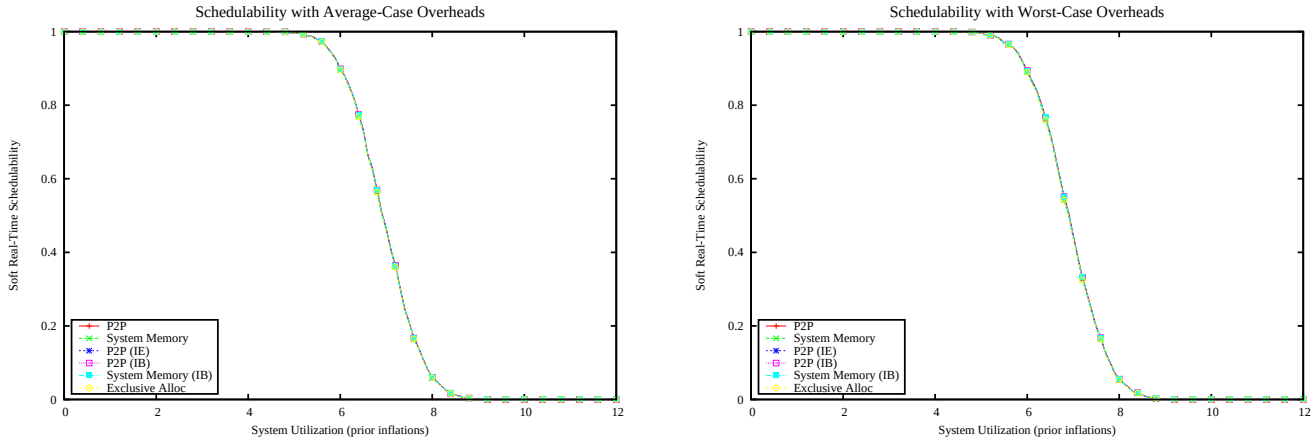

Figure 7620: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

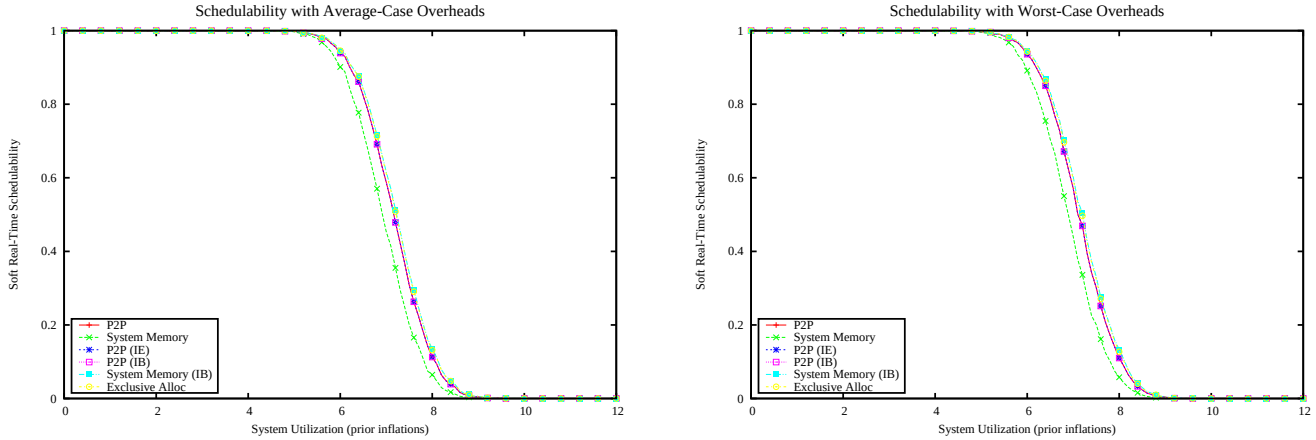

Figure 7621: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

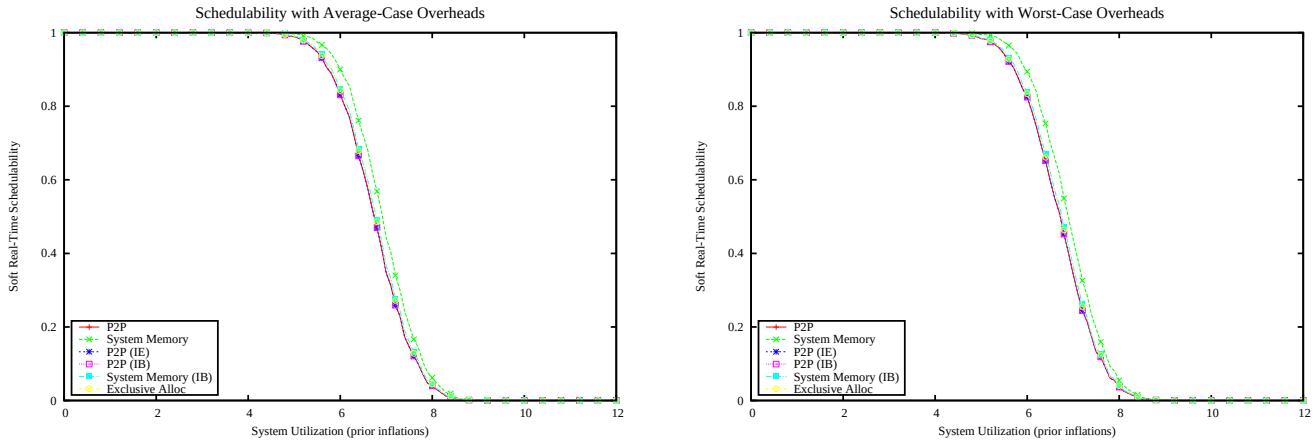

Figure 7622: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

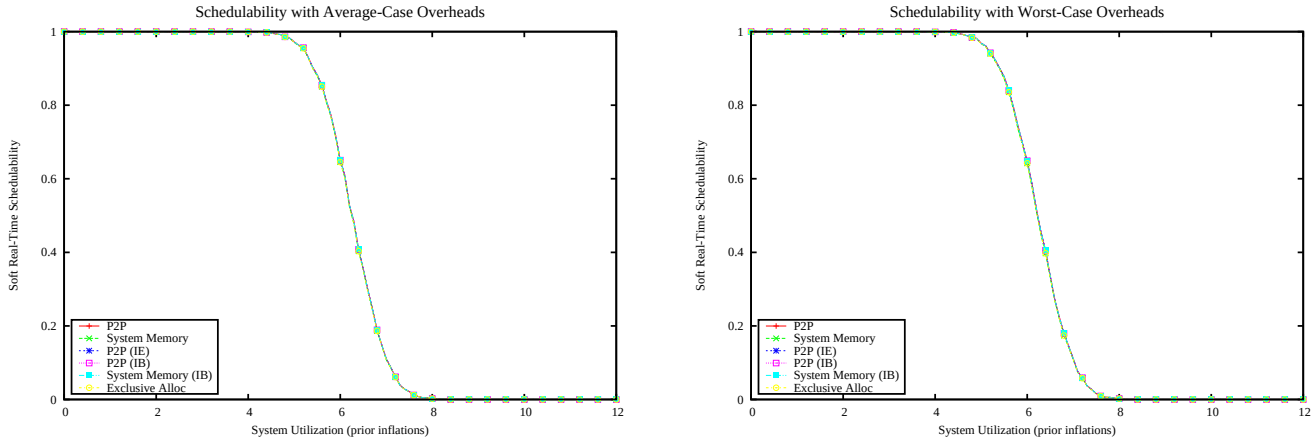

Figure 7623: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

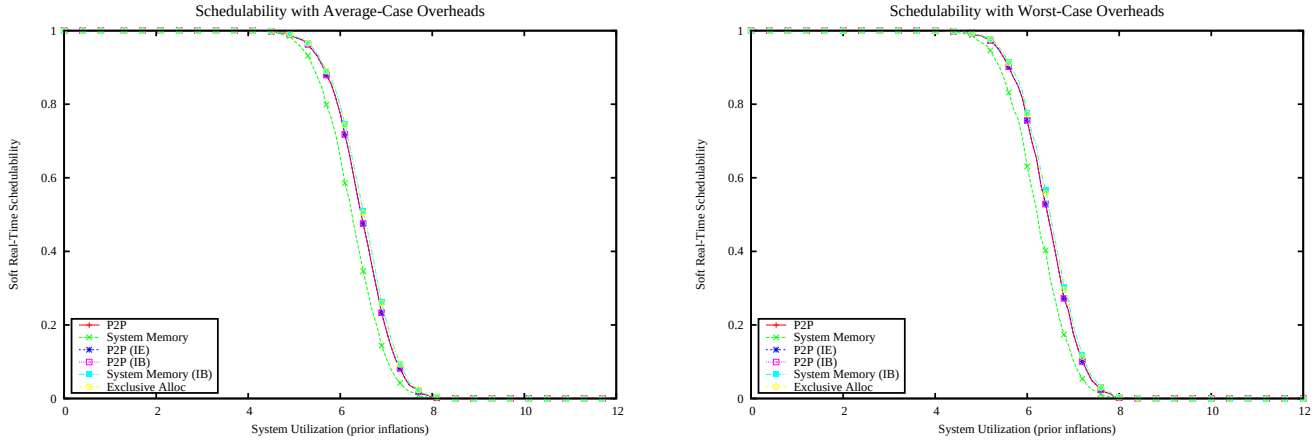

Figure 7624: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

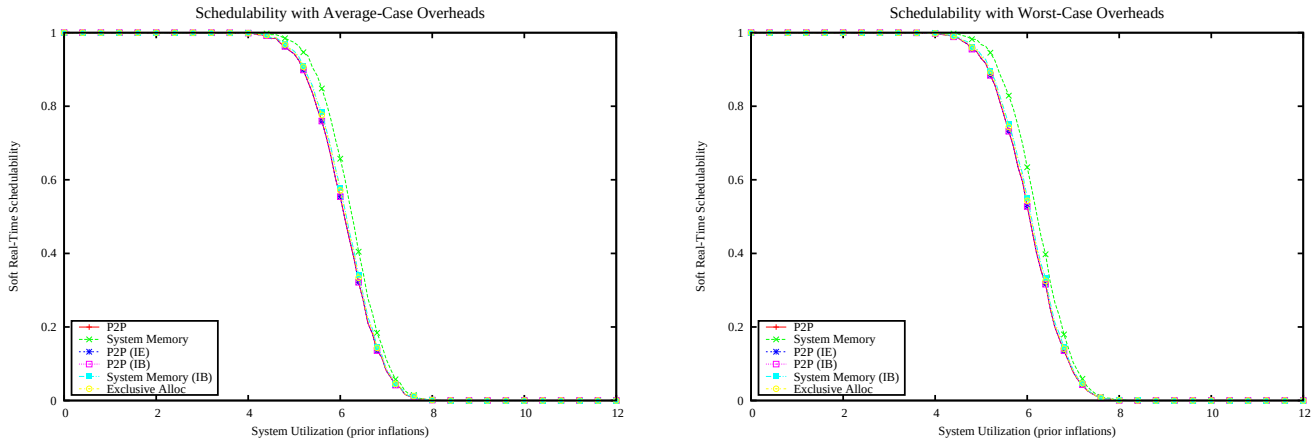

Figure 7625: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

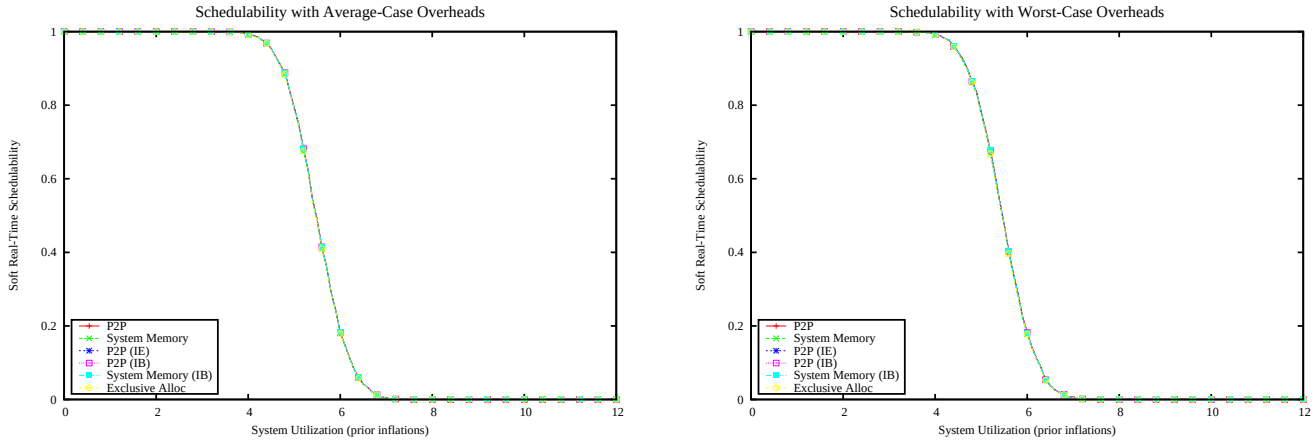

Figure 7626: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

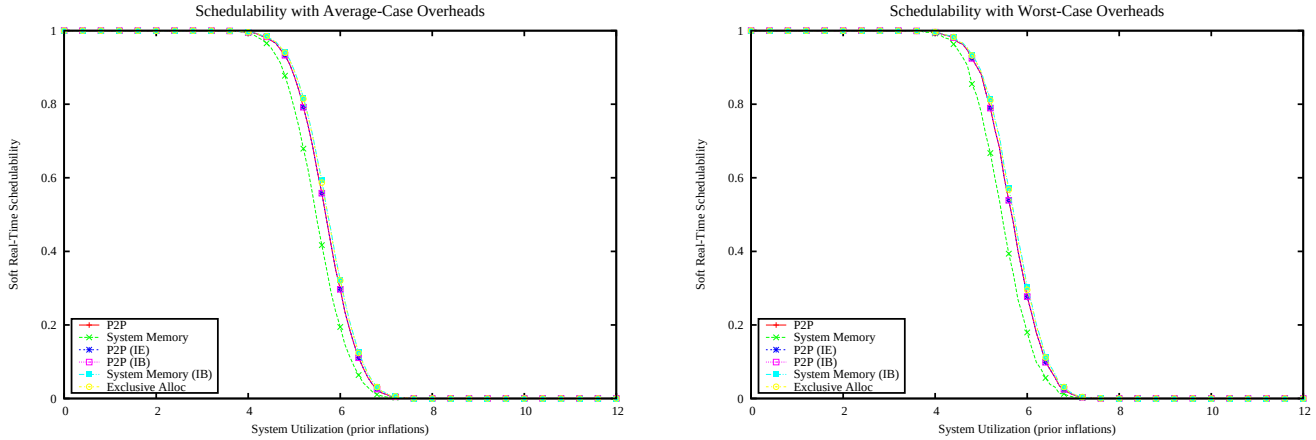

Figure 7627: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

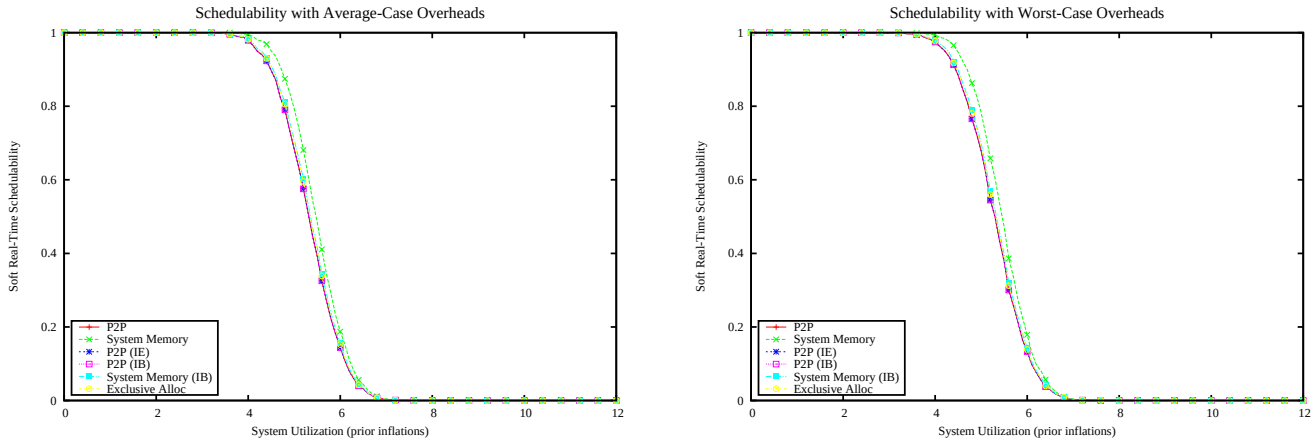

Figure 7628: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 8MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

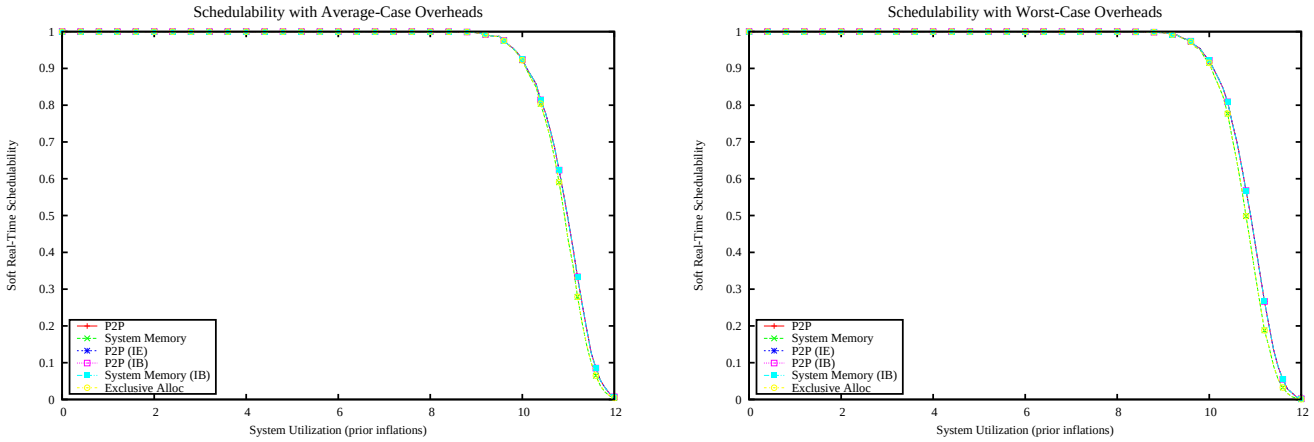

Figure 7629: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

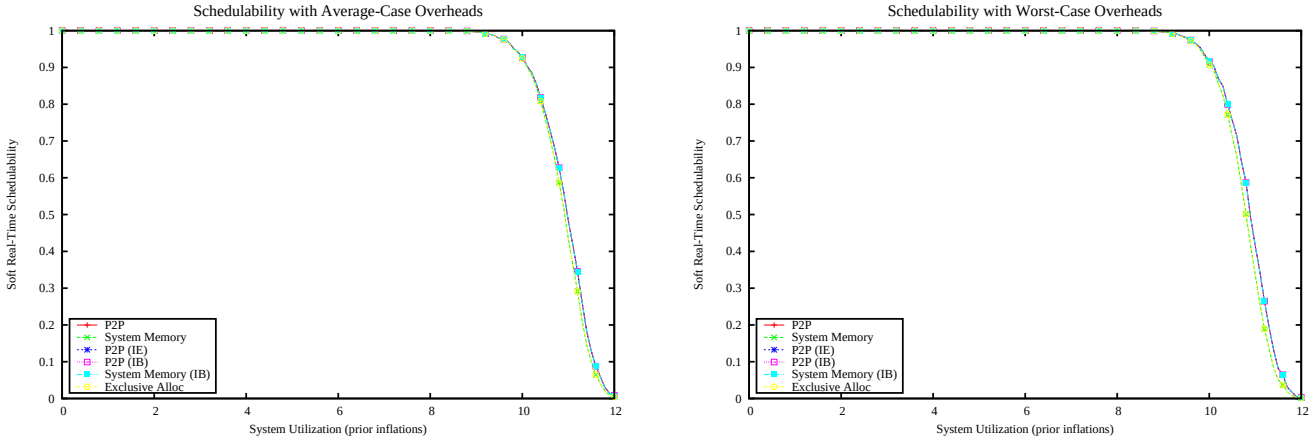

Figure 7630: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

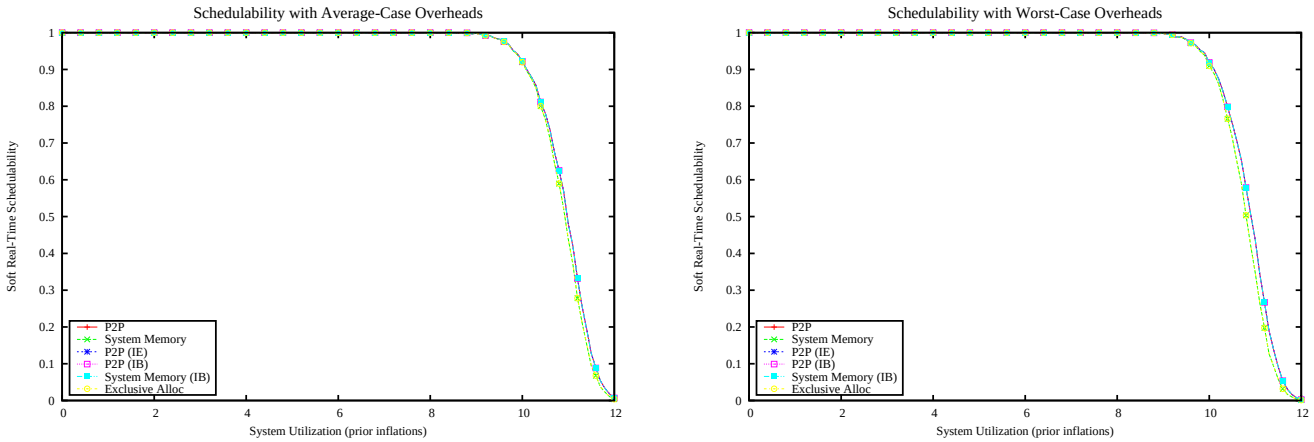

Figure 7631: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

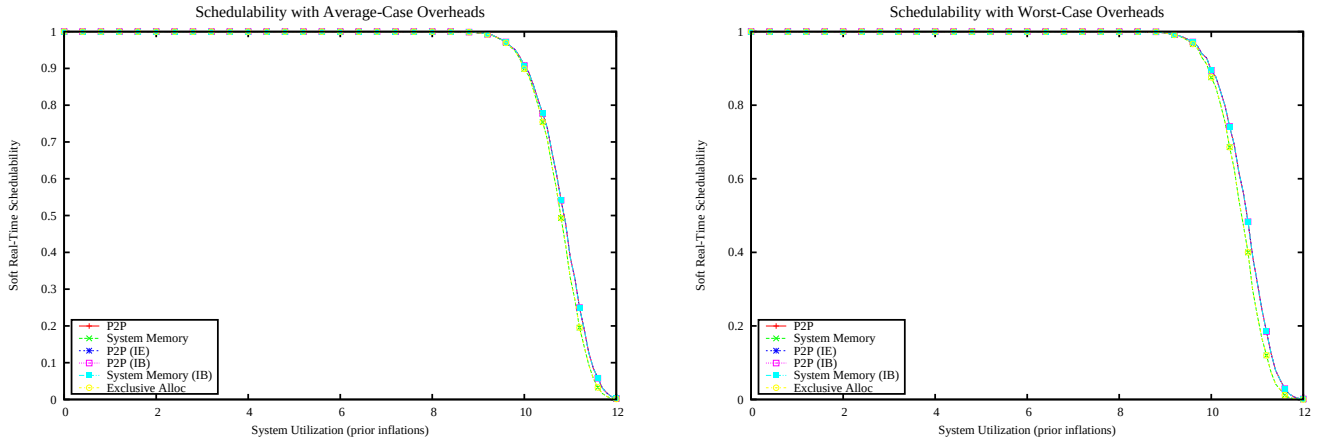

Figure 7632: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

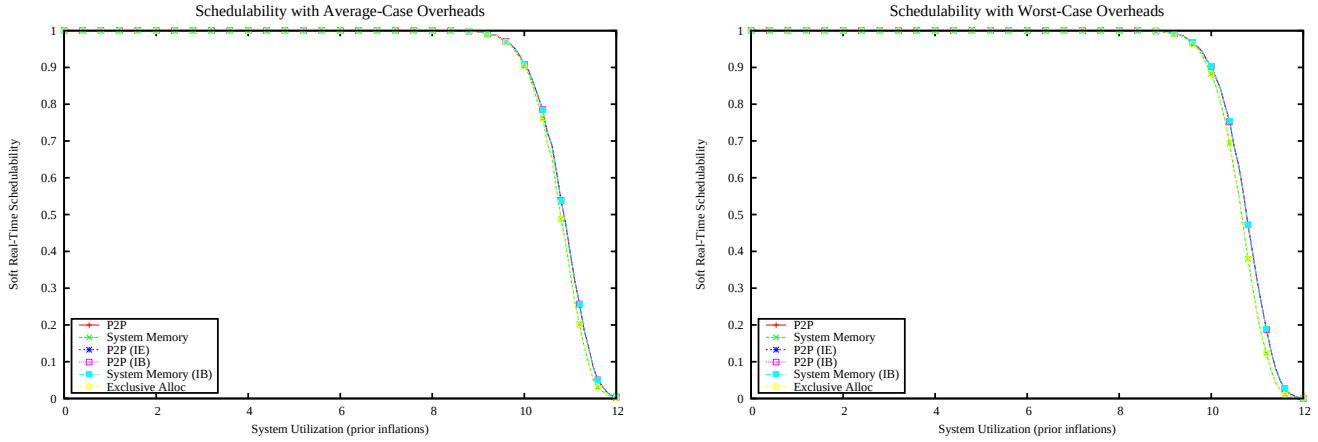

Figure 7633: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

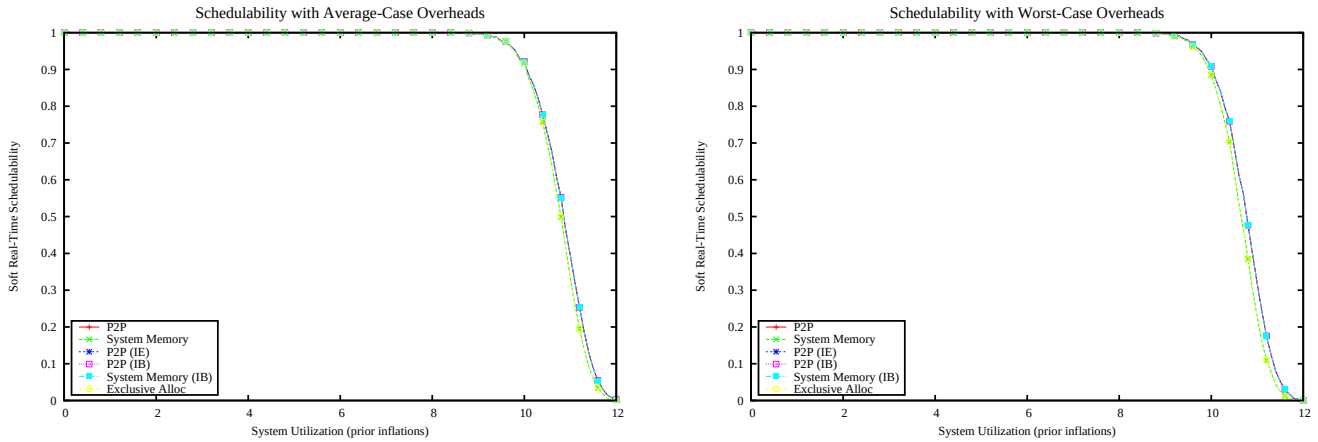

Figure 7634: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

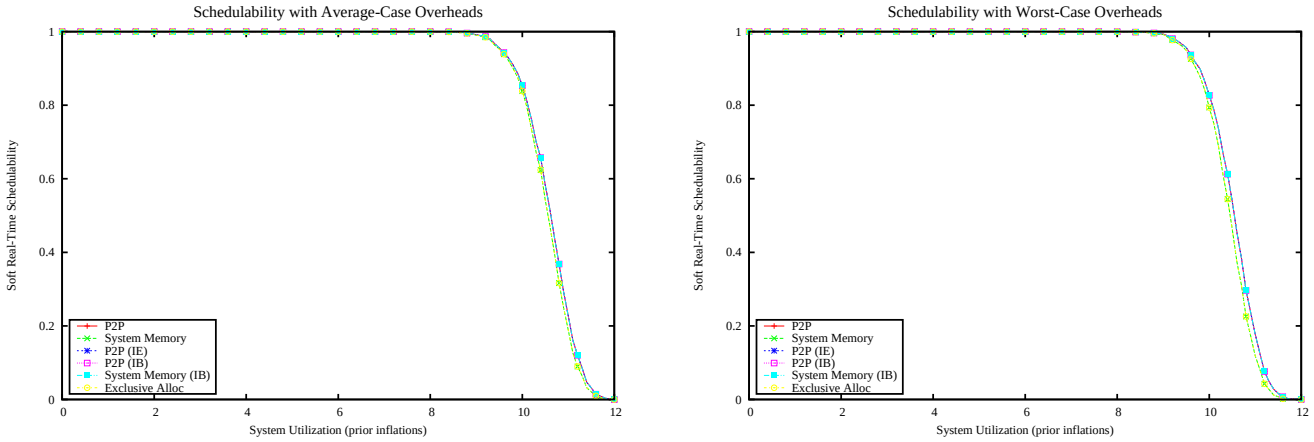

Figure 7635: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

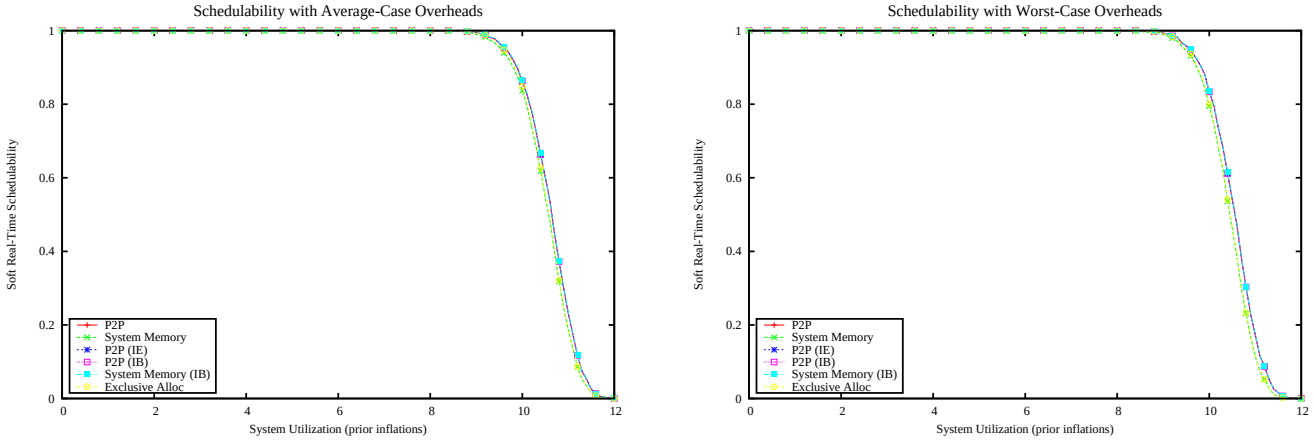

Figure 7636: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

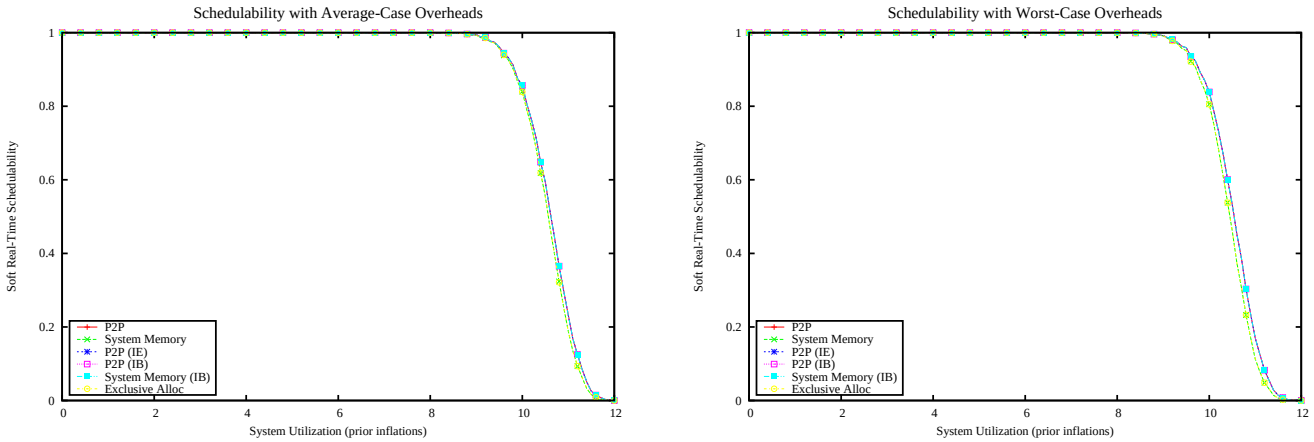

Figure 7637: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

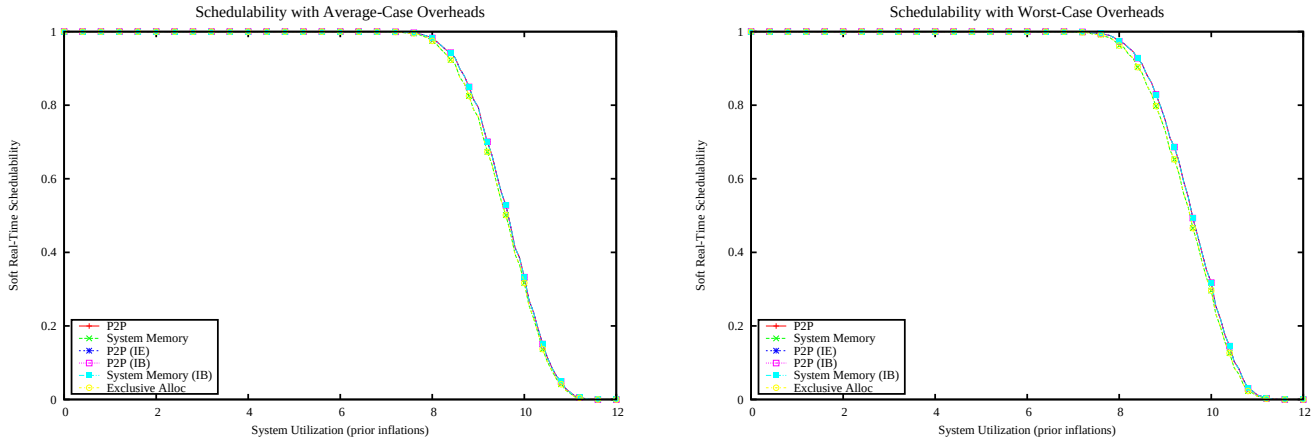

Figure 7638: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

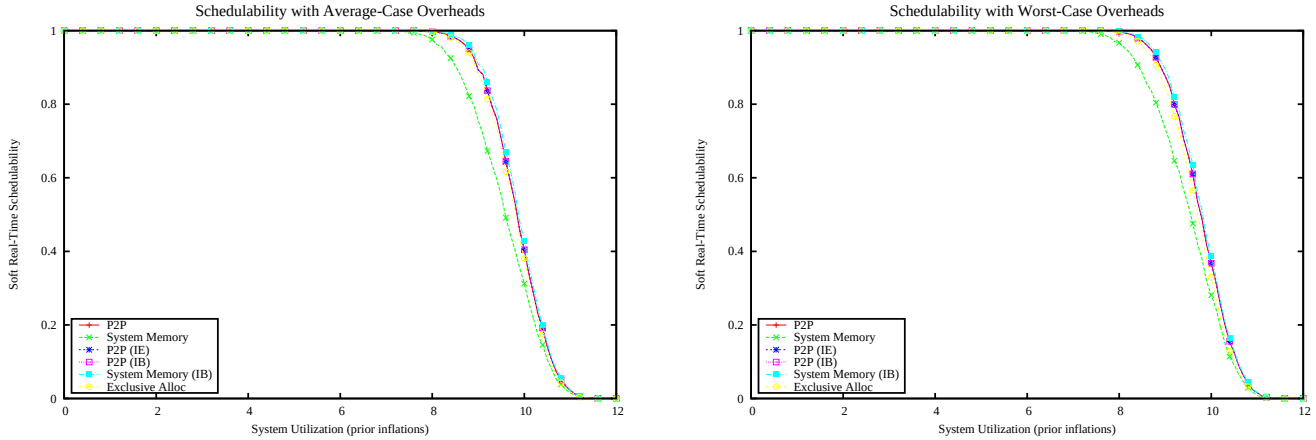

Figure 7639: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

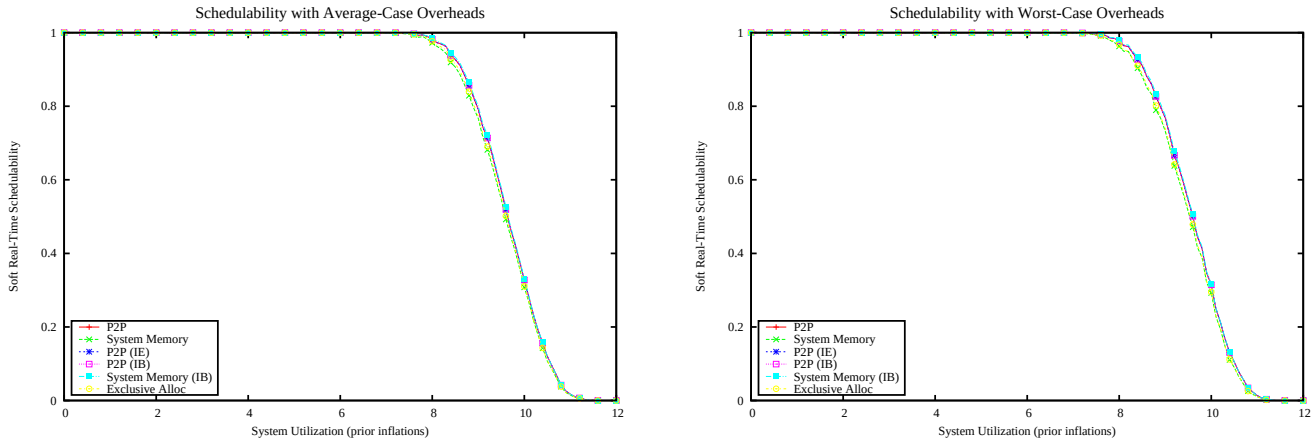

Figure 7640: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

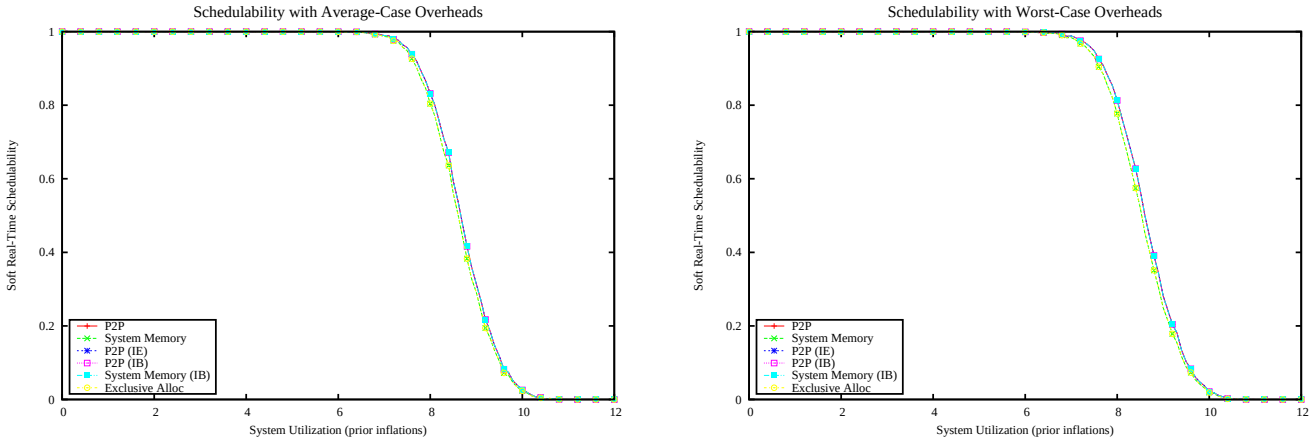

Figure 7641: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

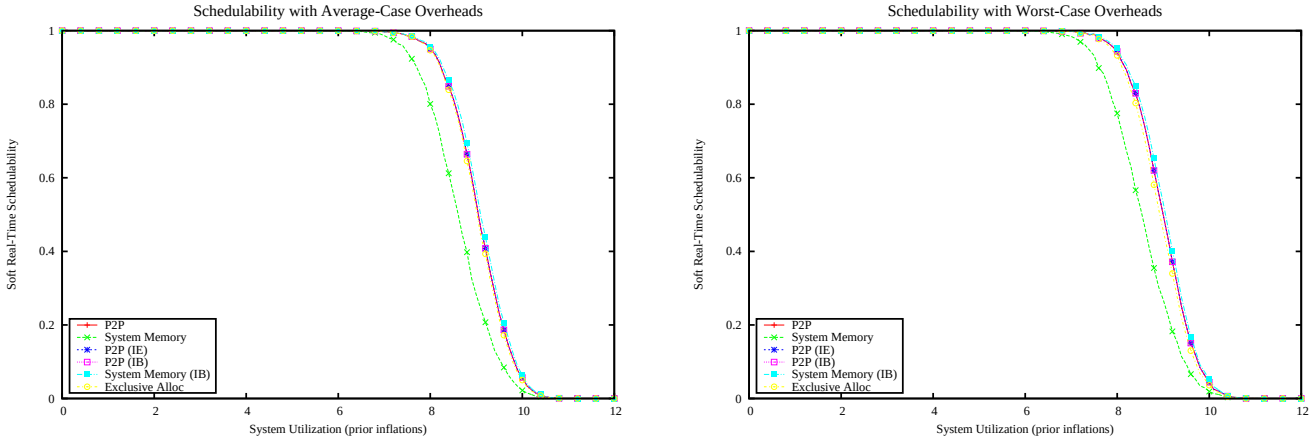

Figure 7642: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

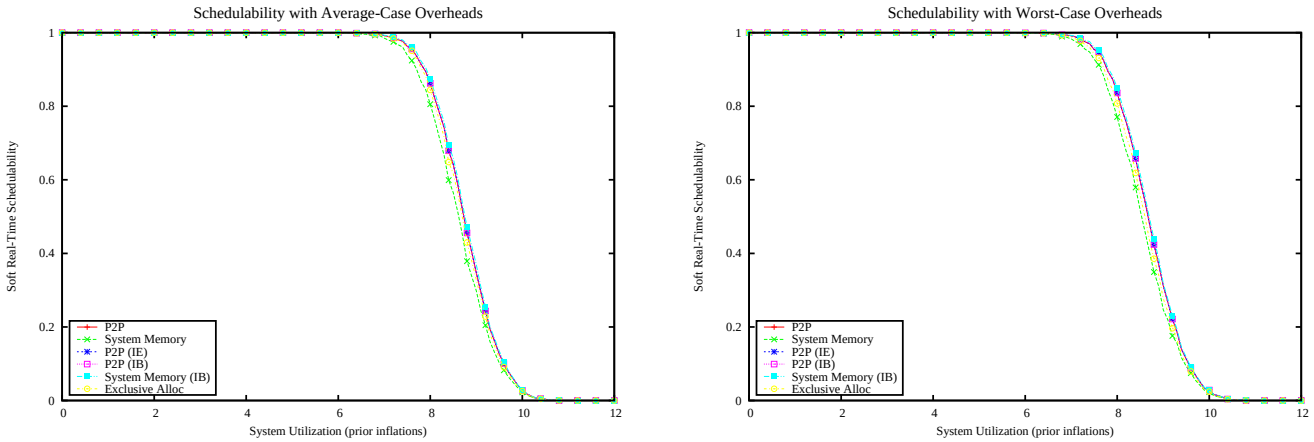

Figure 7643: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

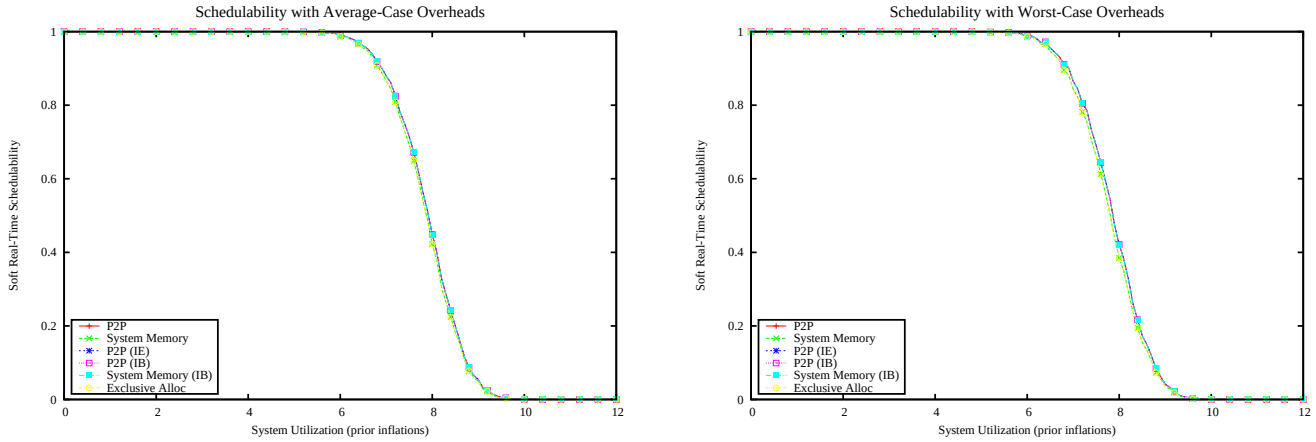

Figure 7644: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

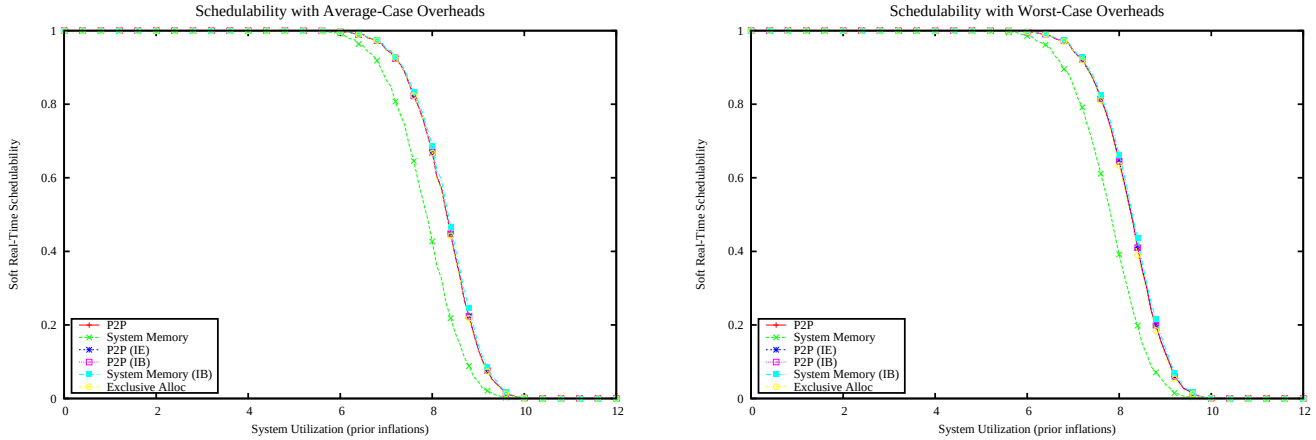

Figure 7645: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

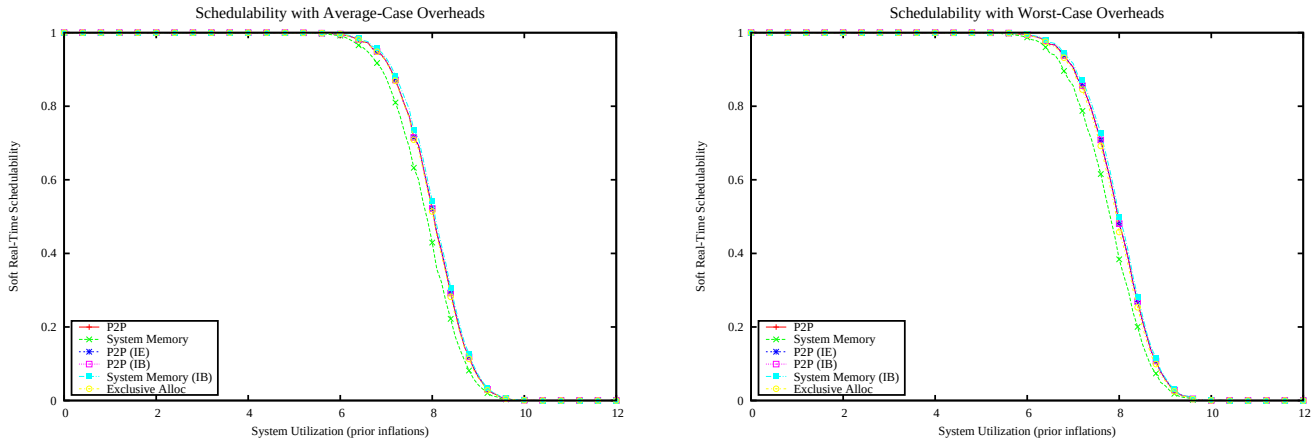

Figure 7646: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

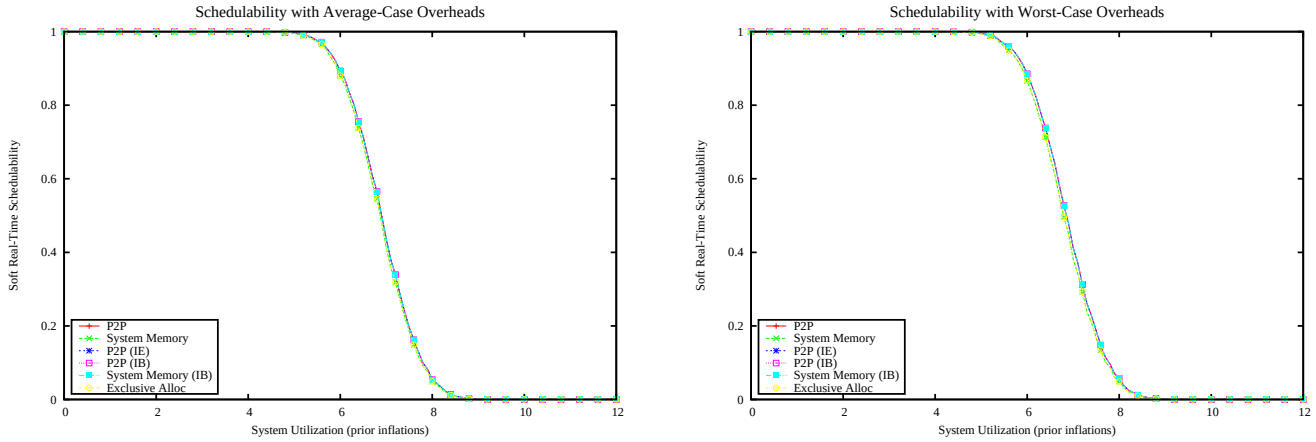

Figure 7647: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

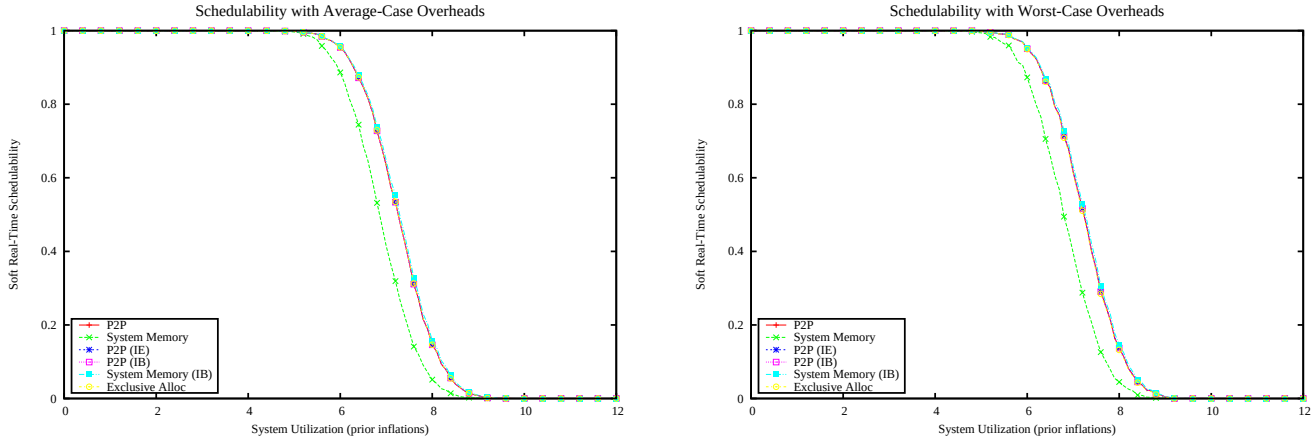

Figure 7648: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

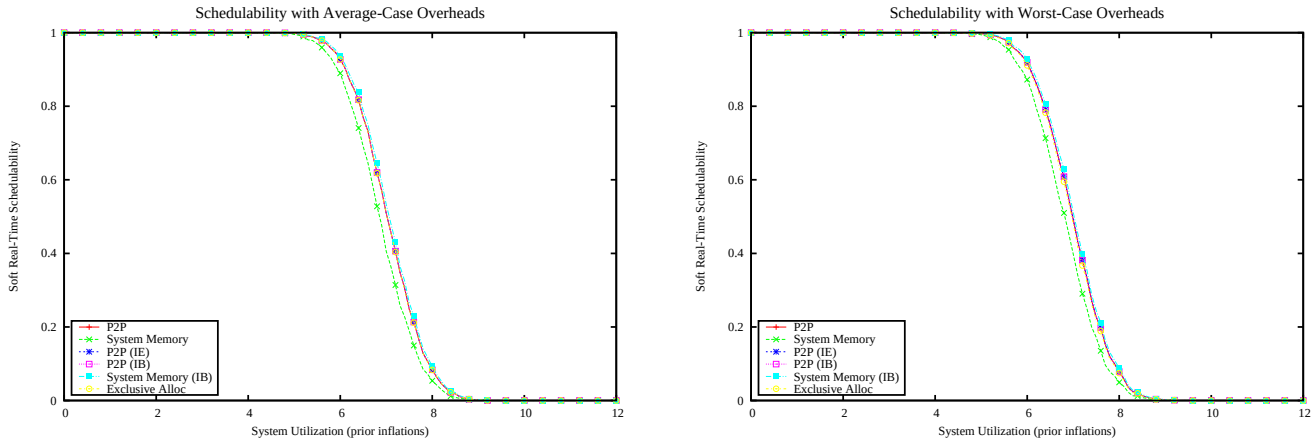

Figure 7649: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

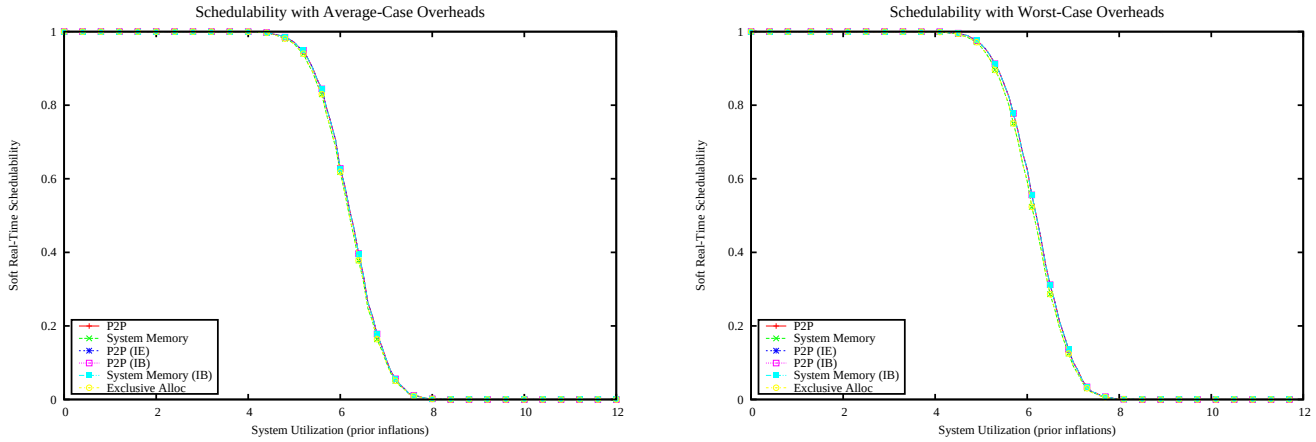

Figure 7650: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

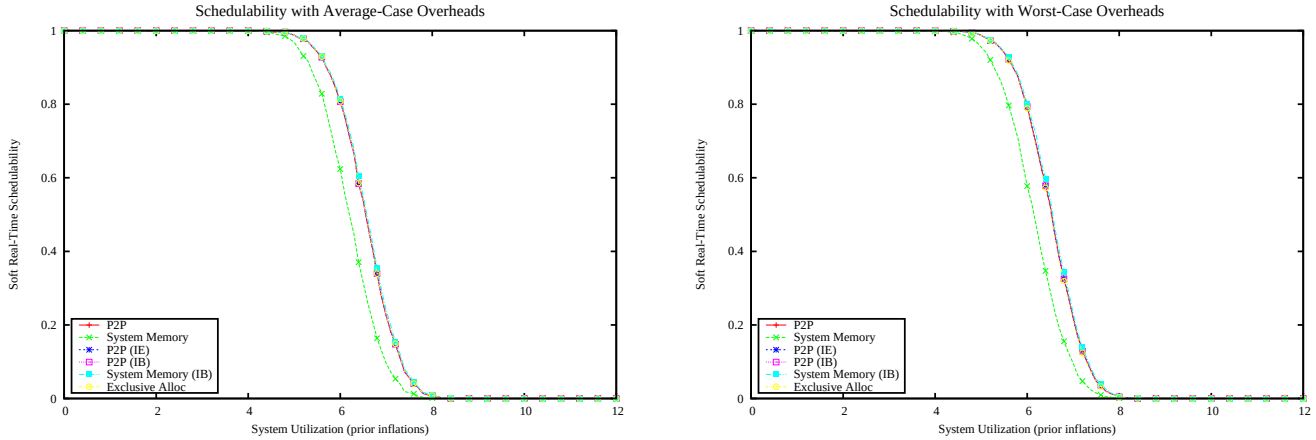

Figure 7651: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

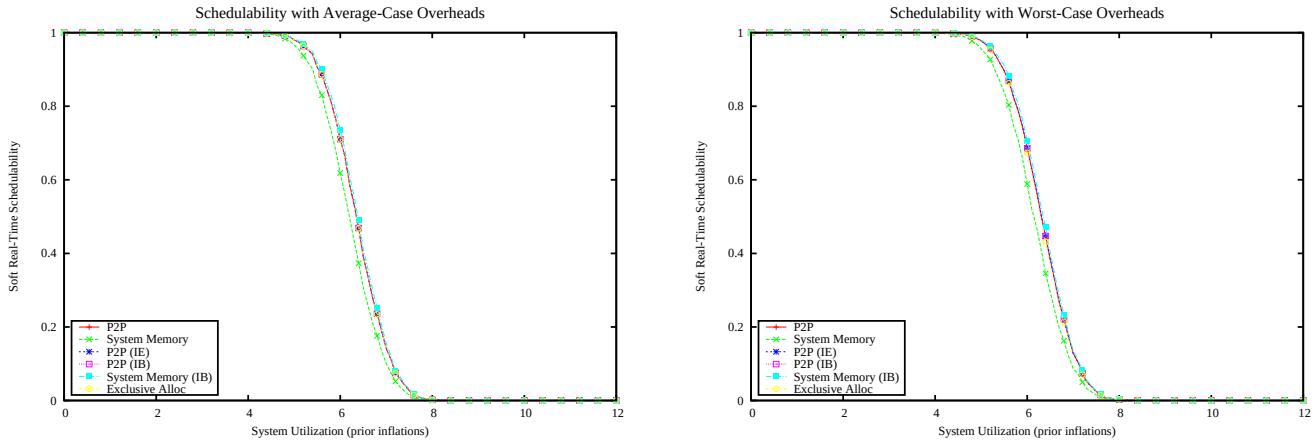

Figure 7652: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

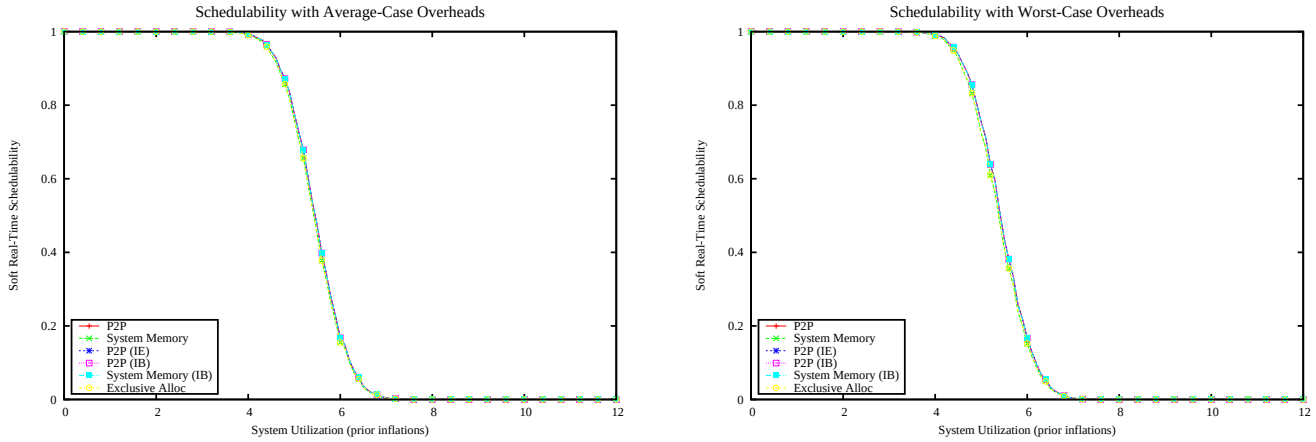

Figure 7653: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

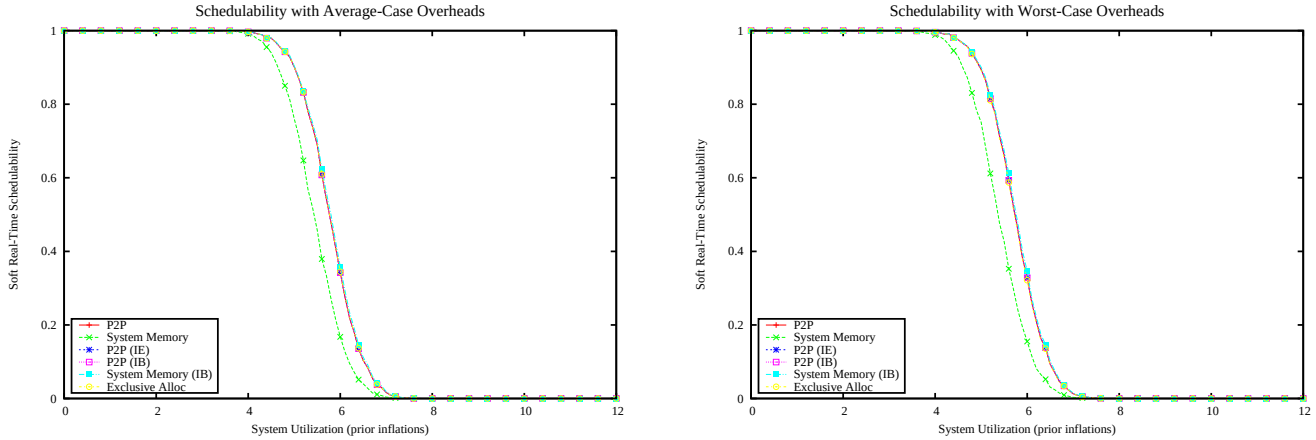

Figure 7654: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

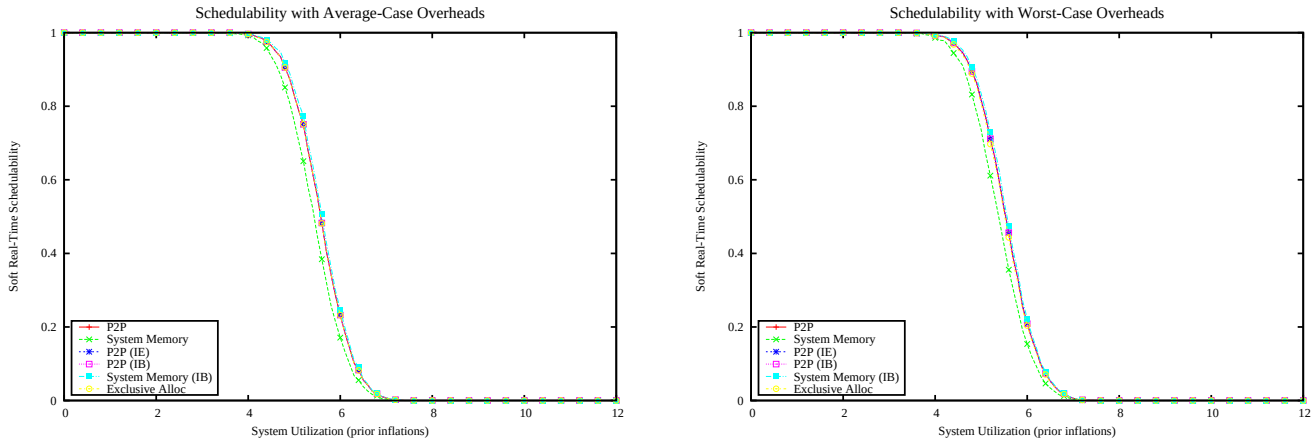

Figure 7655: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

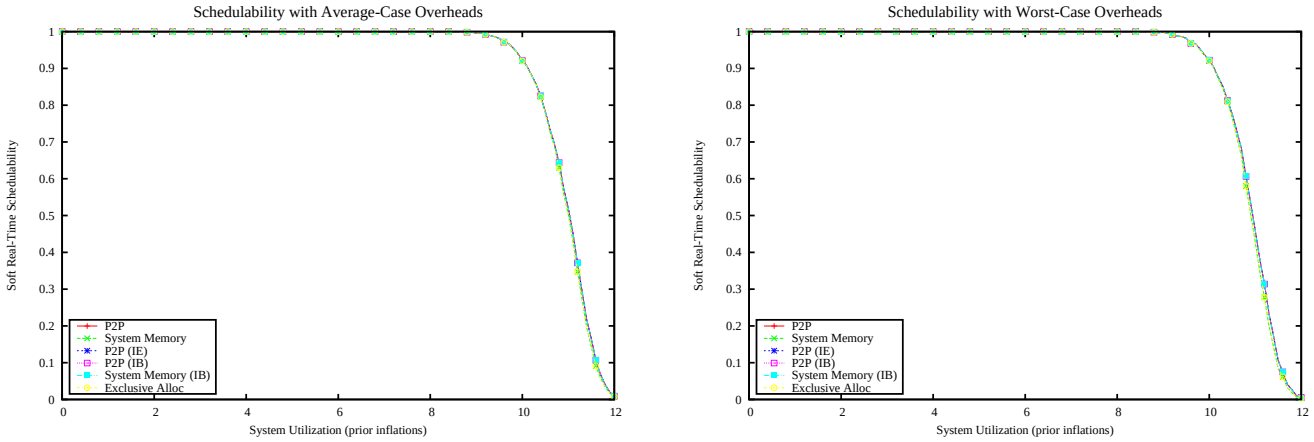

Figure 7656: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

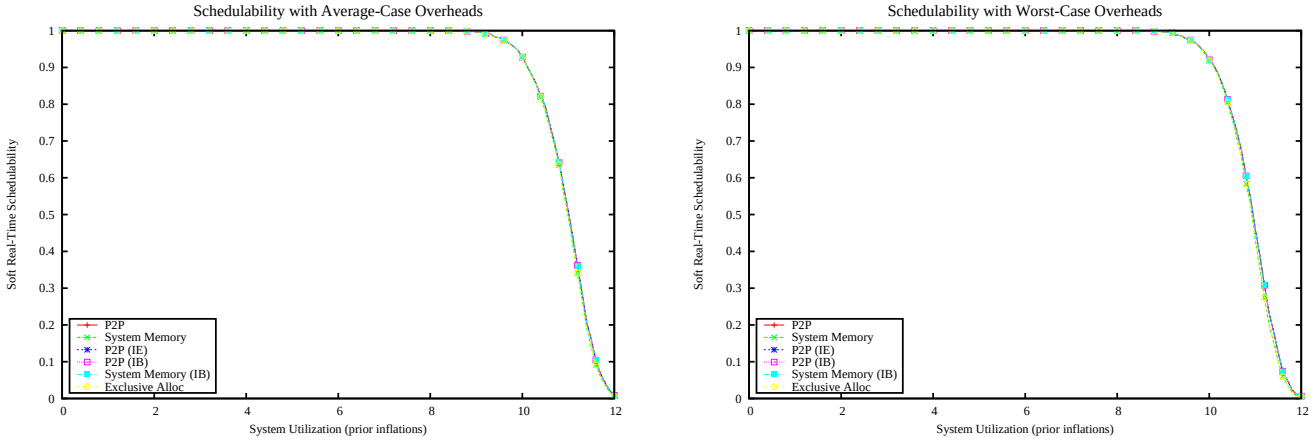

Figure 7657: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

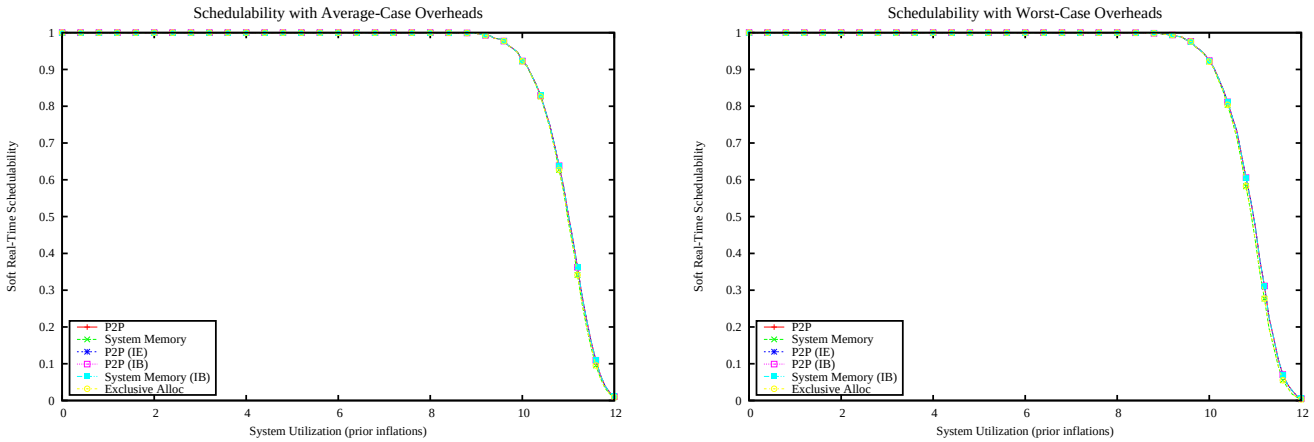

Figure 7658: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

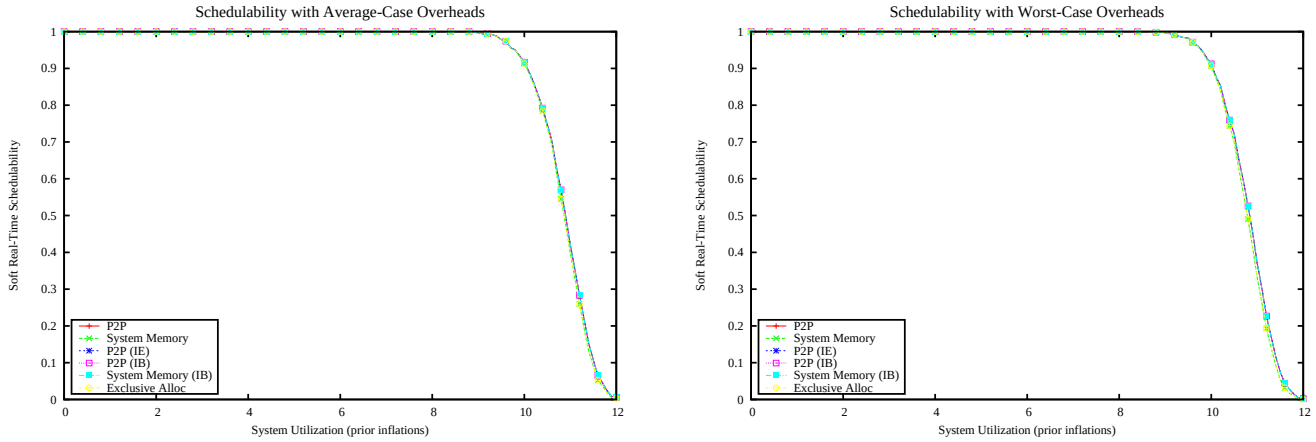

Figure 7659: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

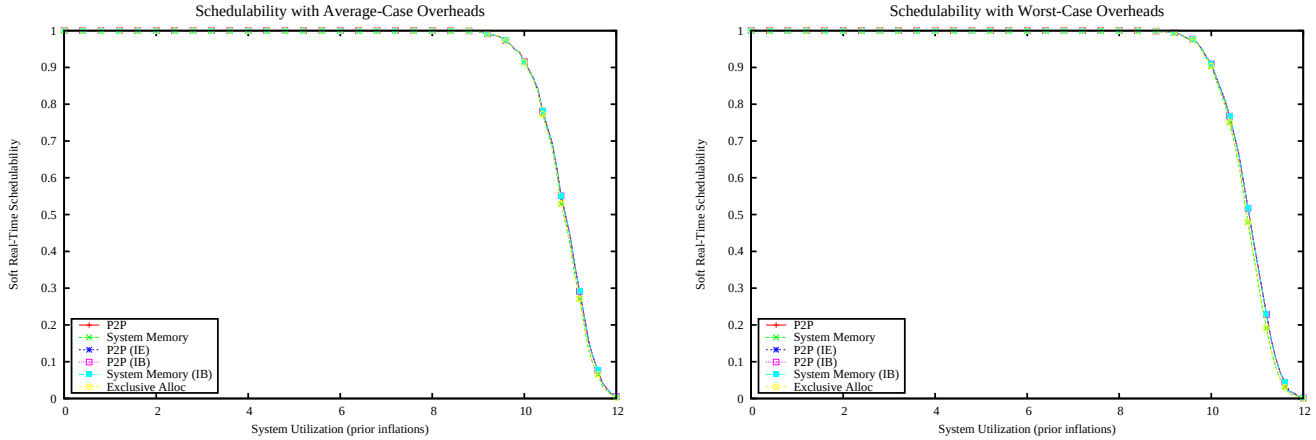

Figure 7660: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

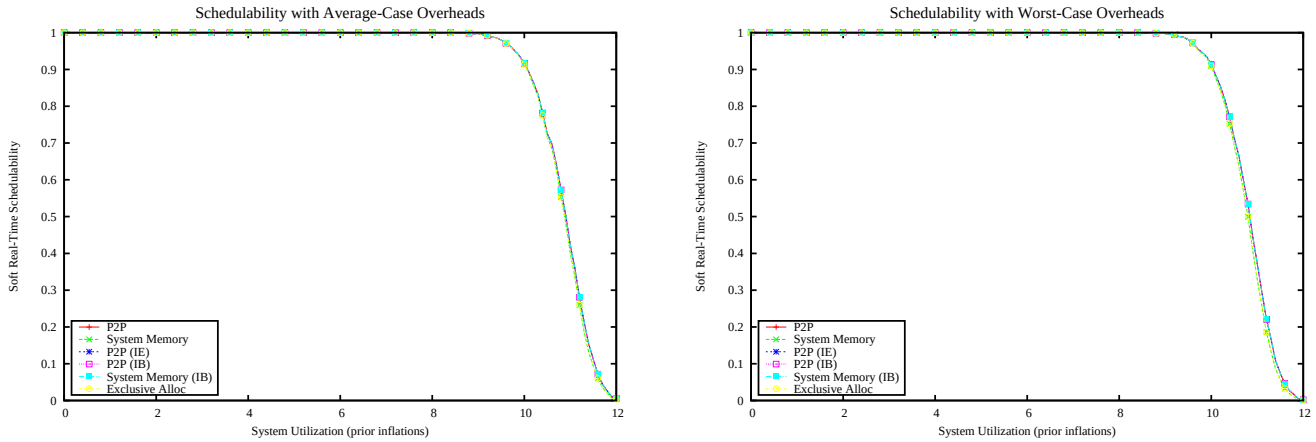

Figure 7661: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

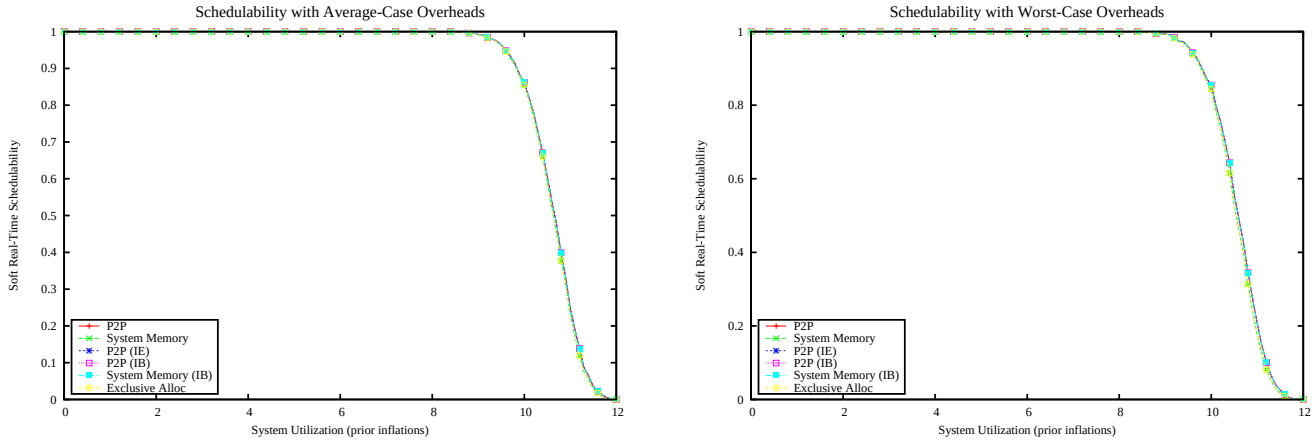

Figure 7662: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

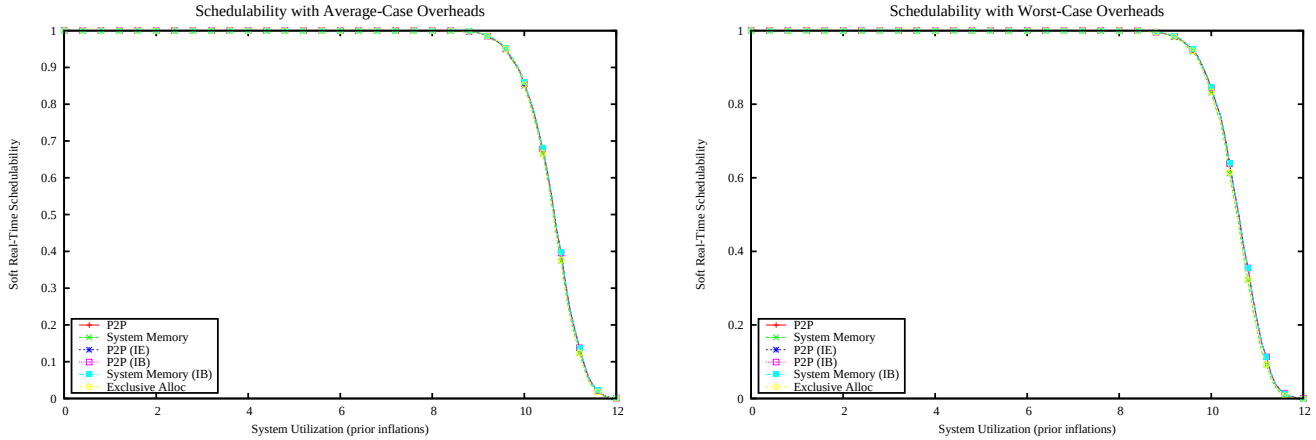

Figure 7663: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

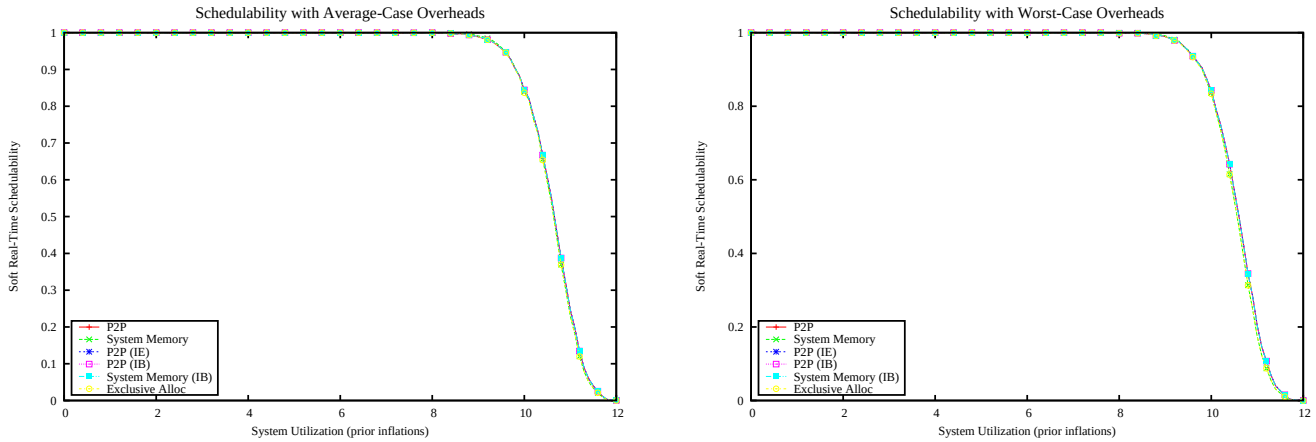

Figure 7664: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

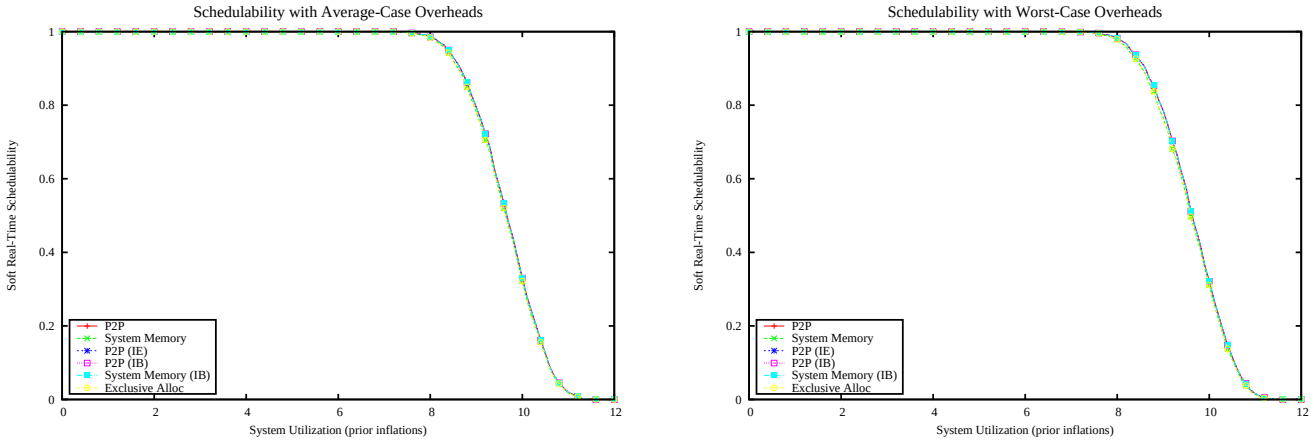

Figure 7665: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

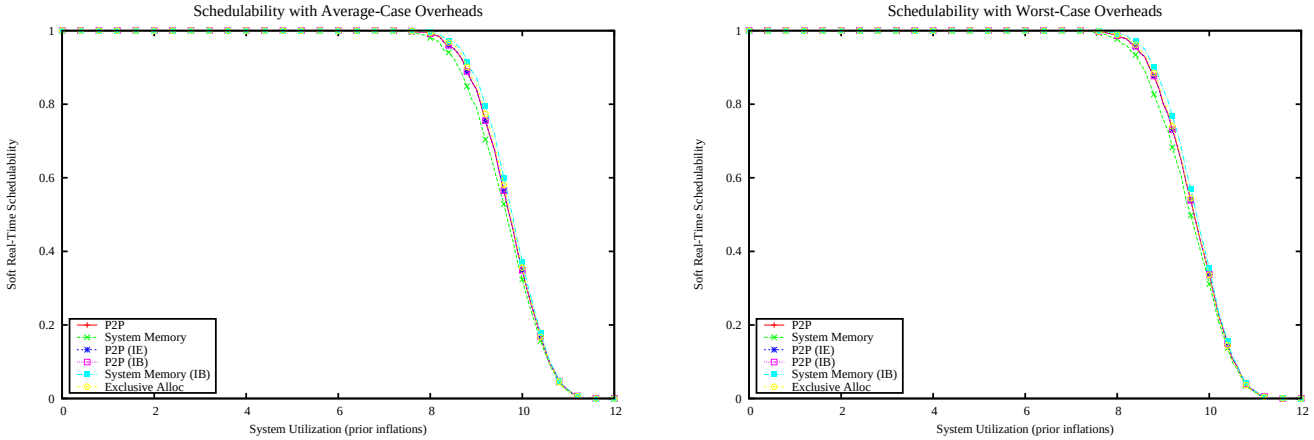

Figure 7666: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

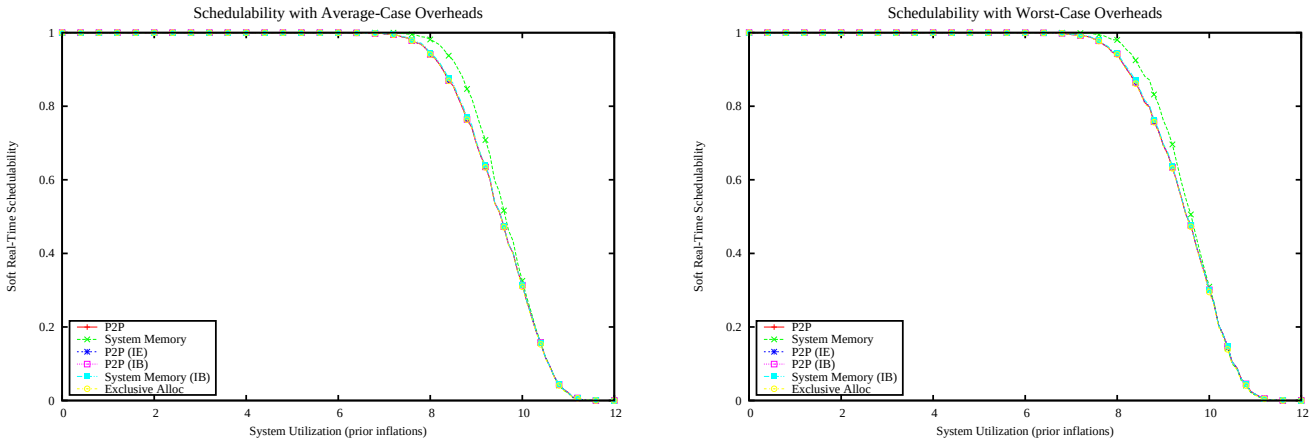

Figure 7667: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

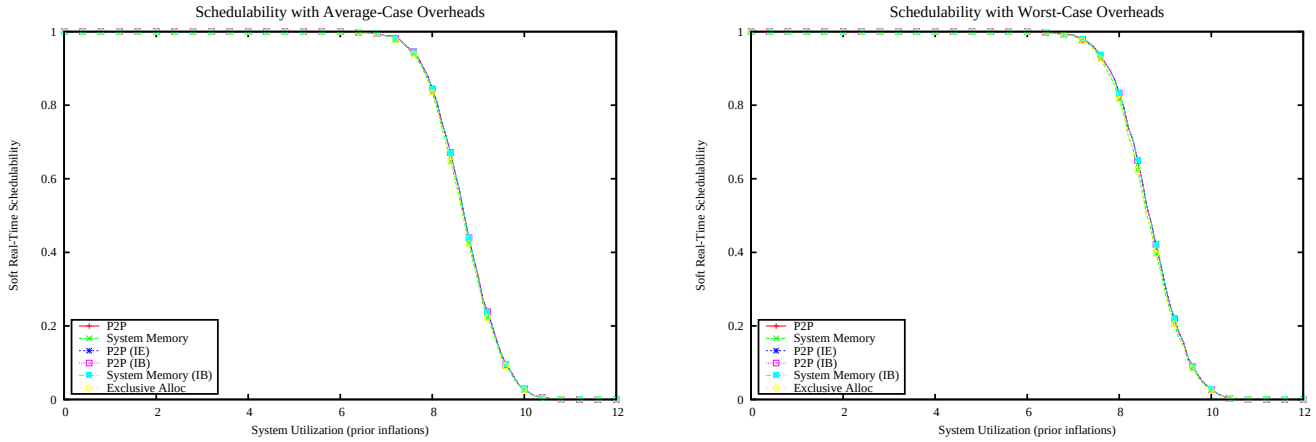

Figure 7668: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

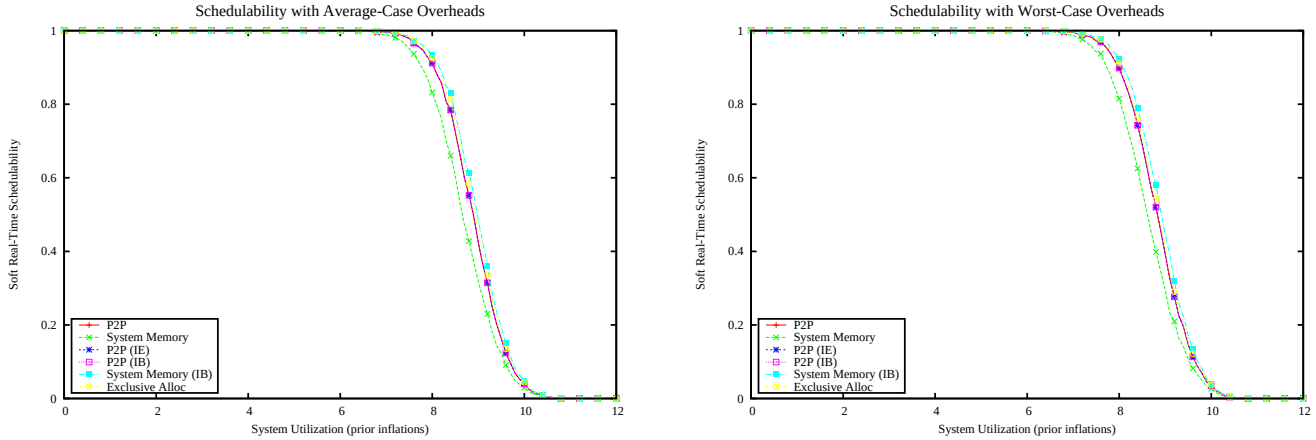

Figure 7669: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

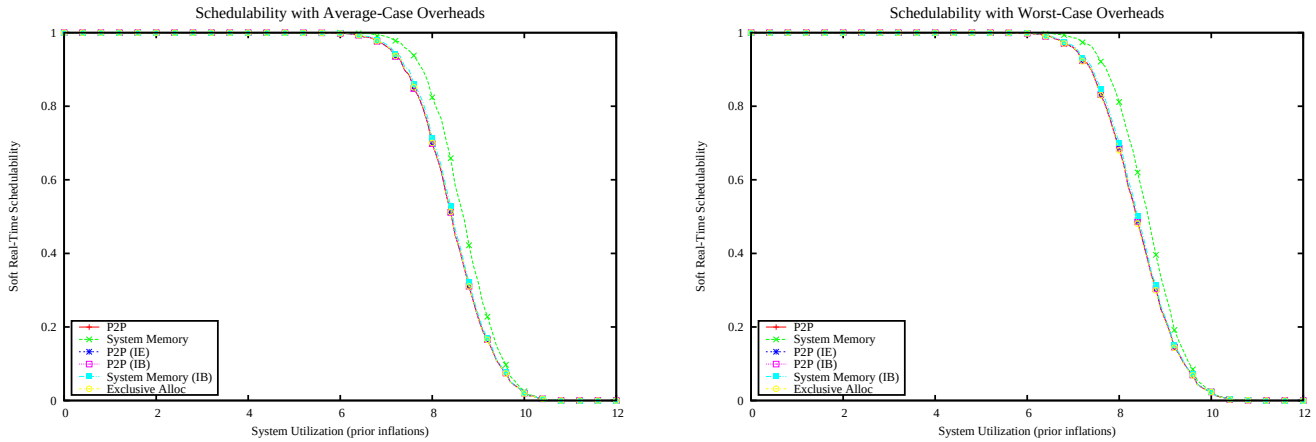

Figure 7670: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

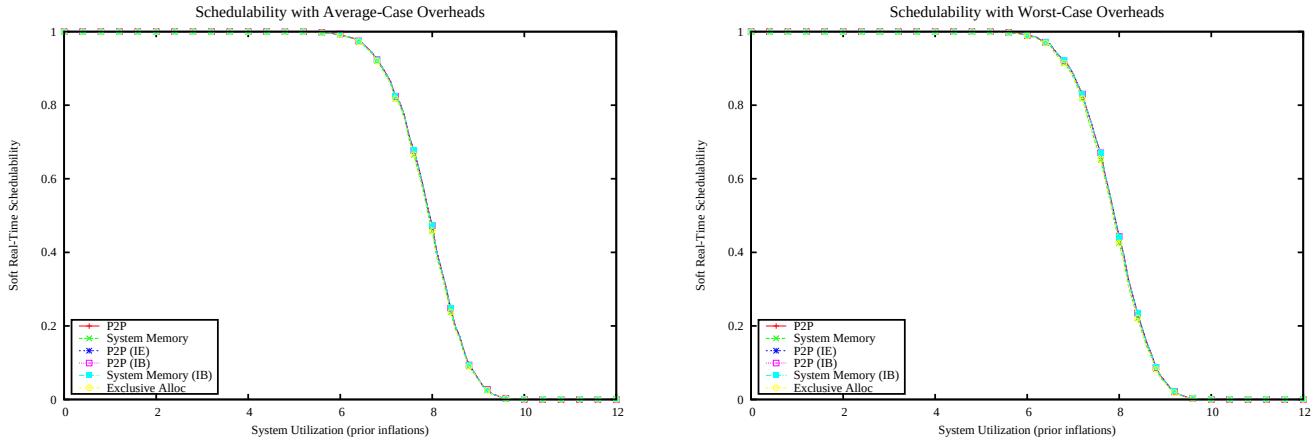

Figure 7671: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

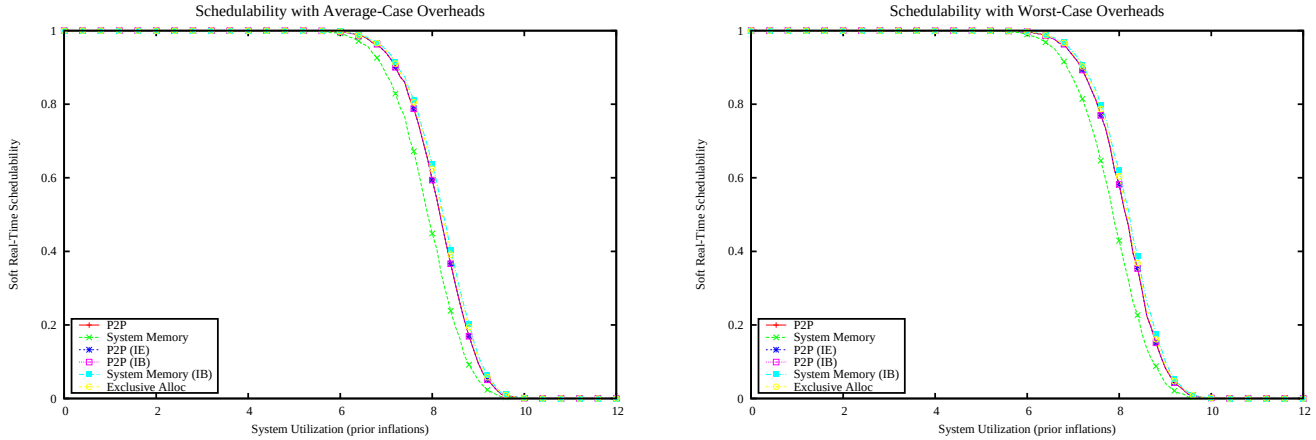

Figure 7672: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

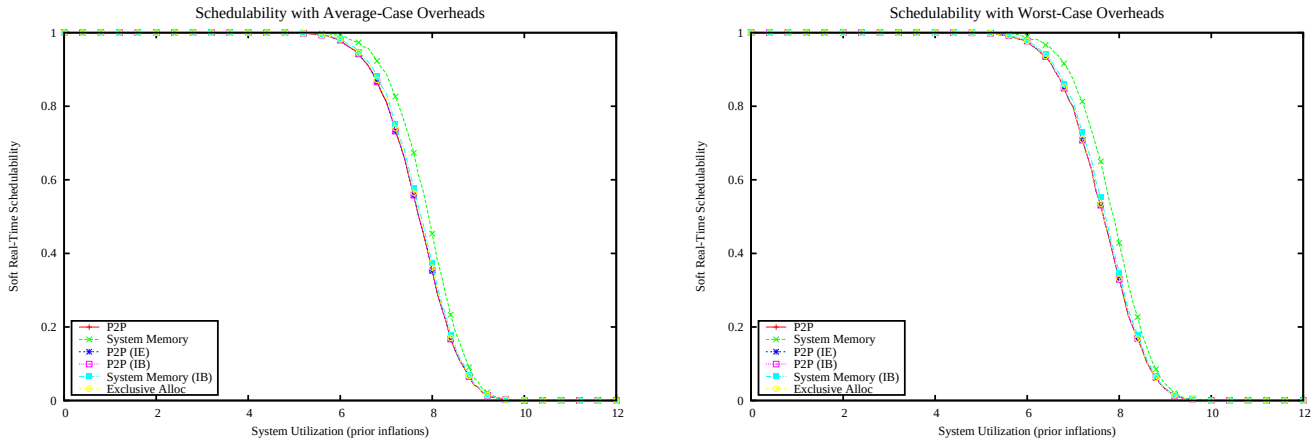

Figure 7673: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

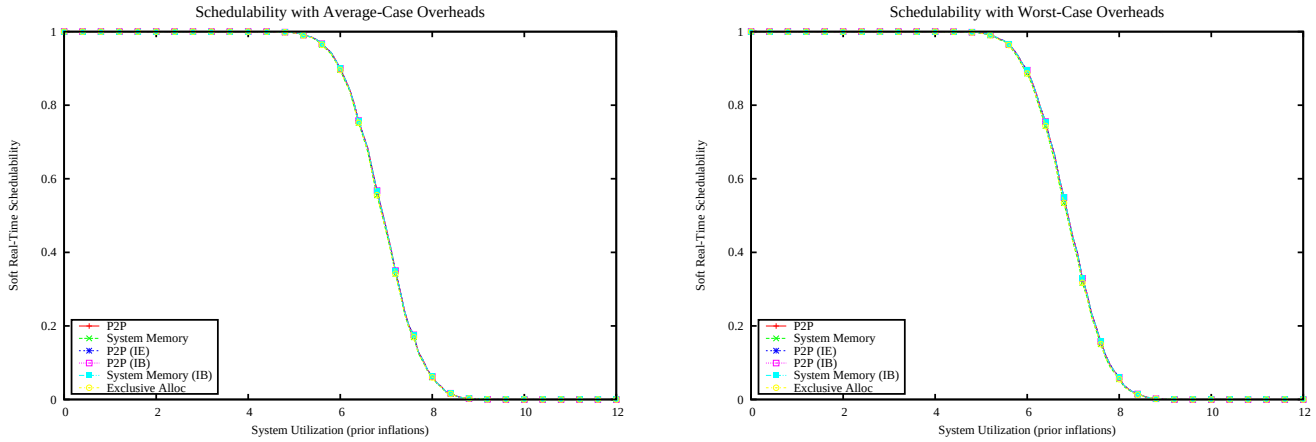

Figure 7674: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

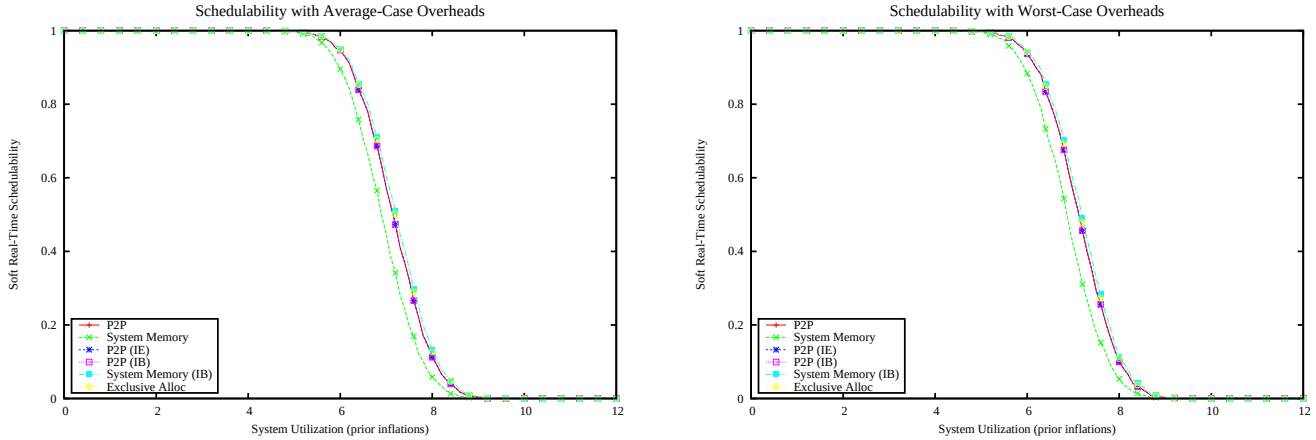

Figure 7675: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

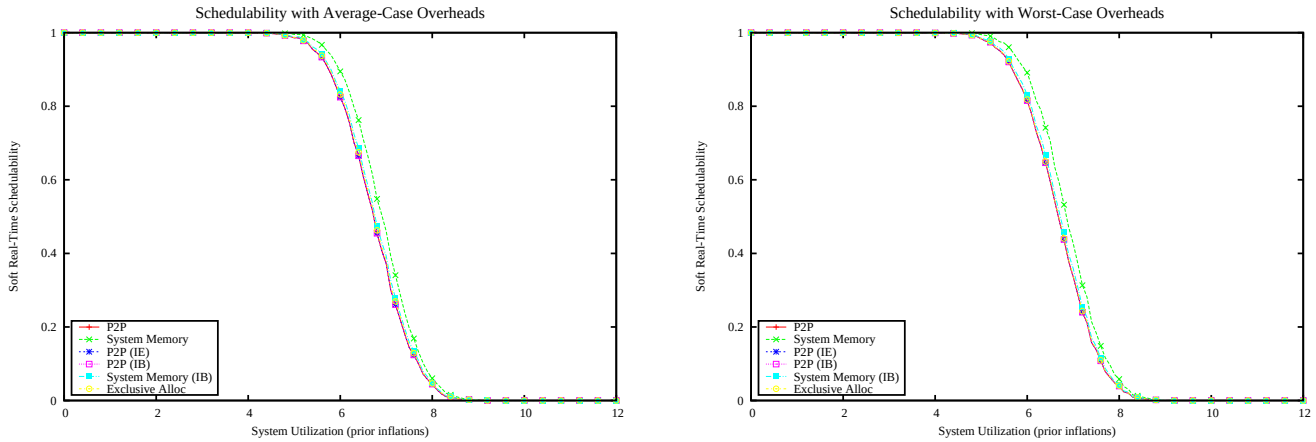

Figure 7676: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

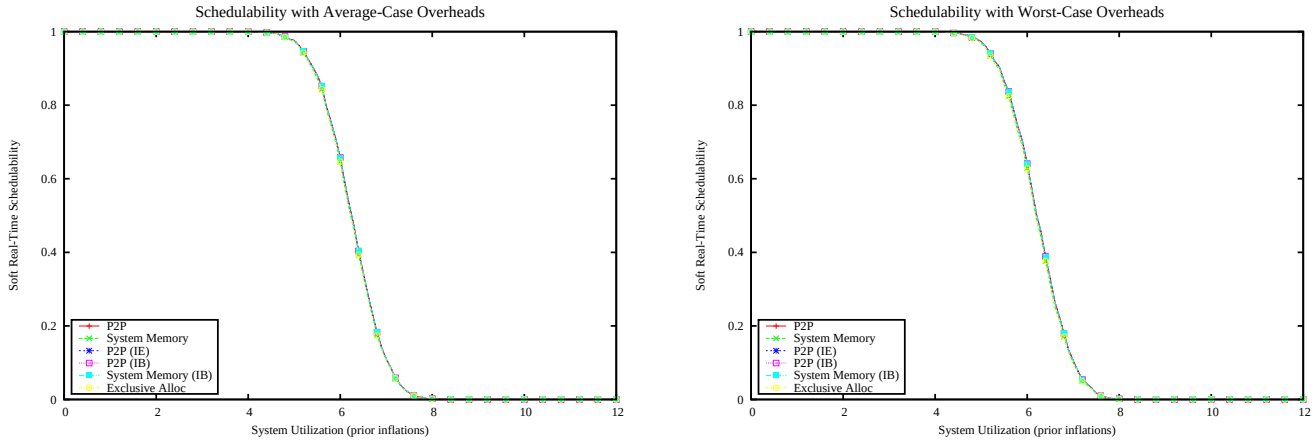

Figure 7677: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

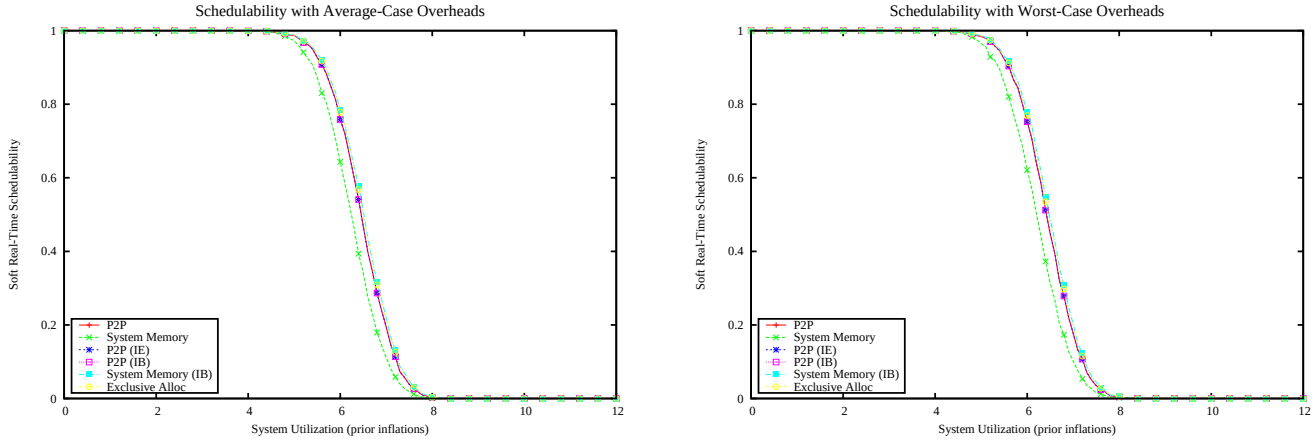

Figure 7678: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

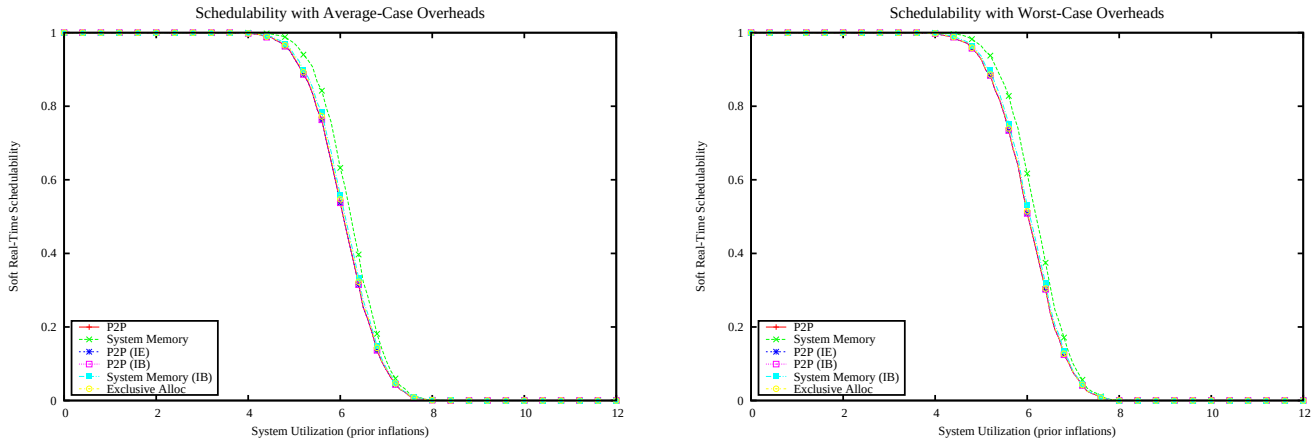

Figure 7679: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

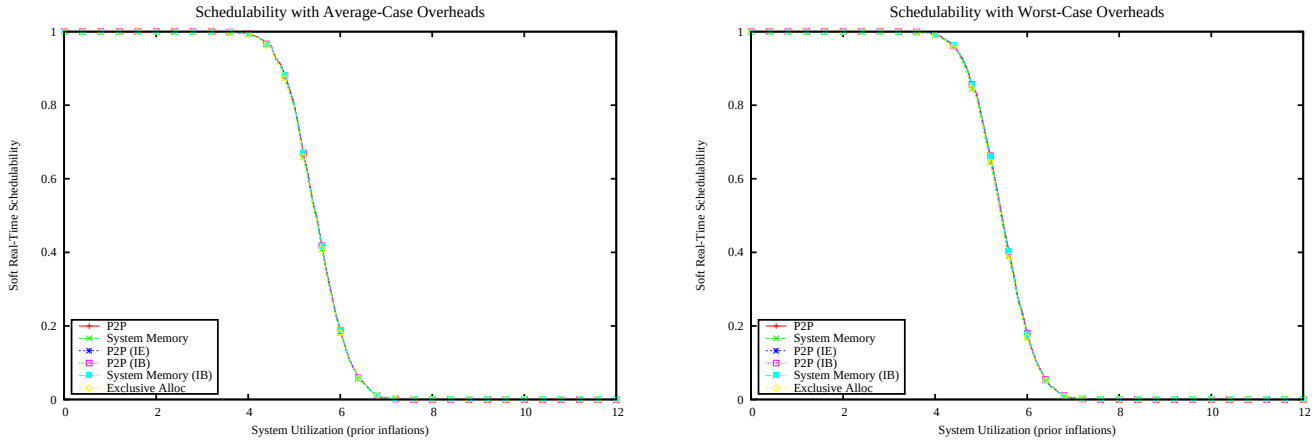

Figure 7680: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

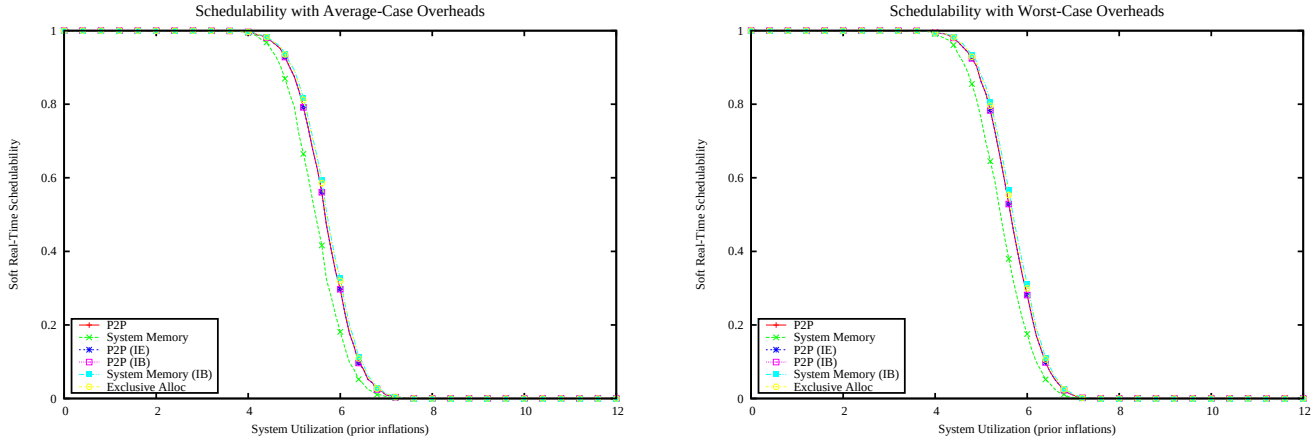

Figure 7681: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

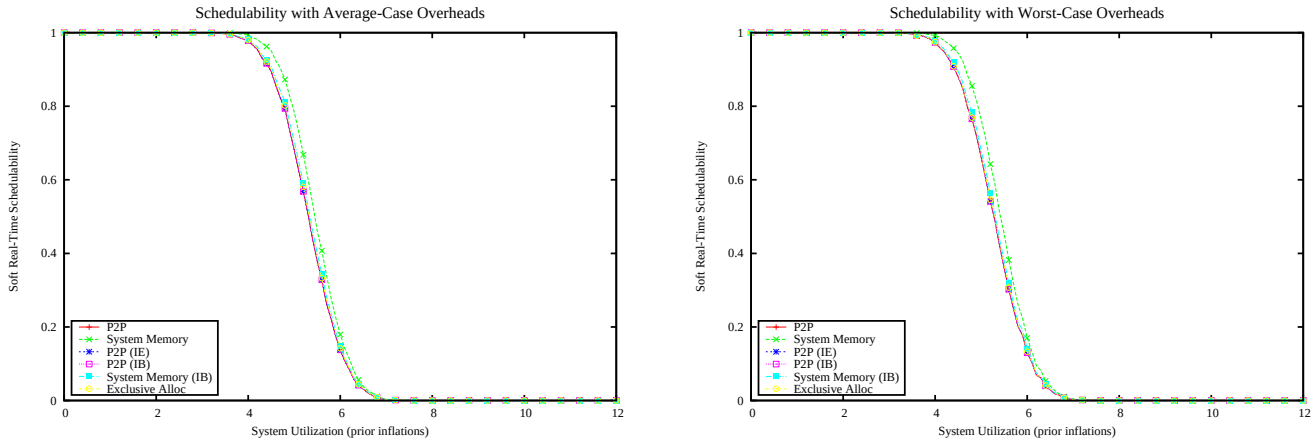

Figure 7682: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 16MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

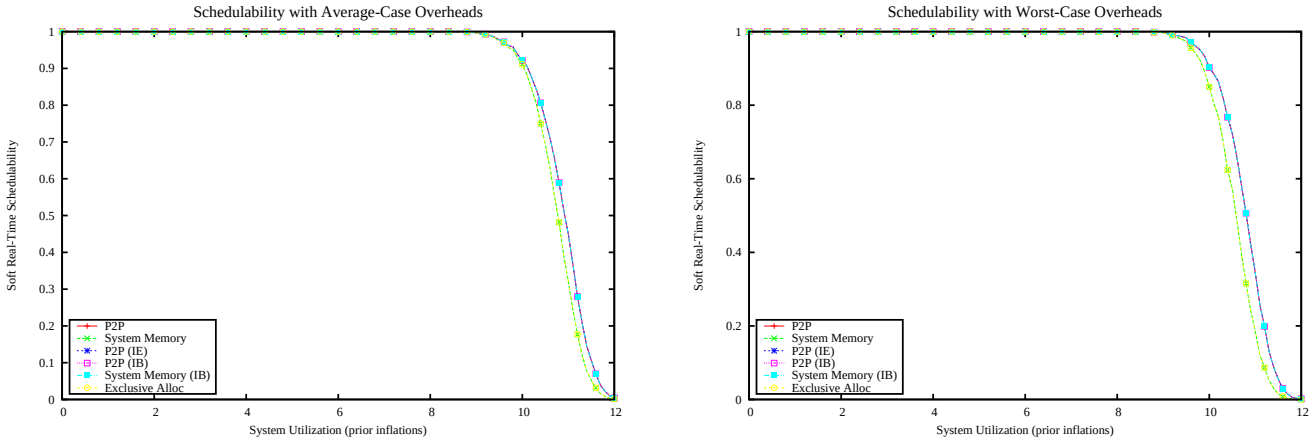

Figure 7683: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

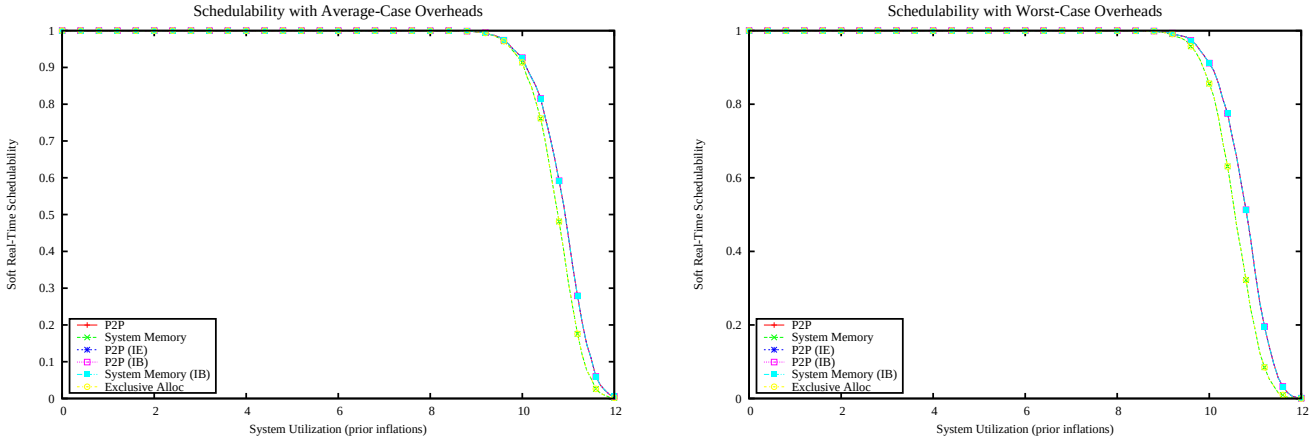

Figure 7684: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

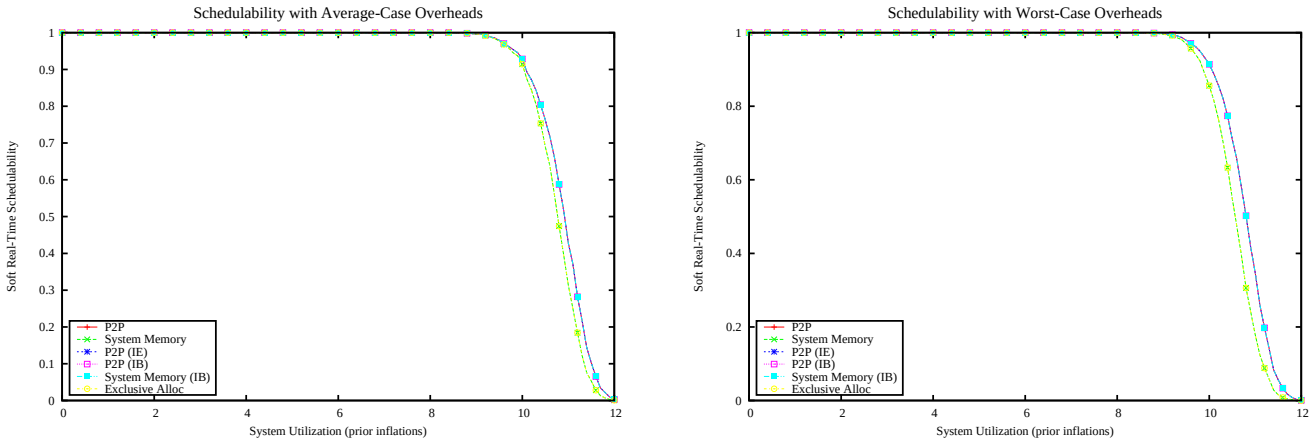

Figure 7685: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

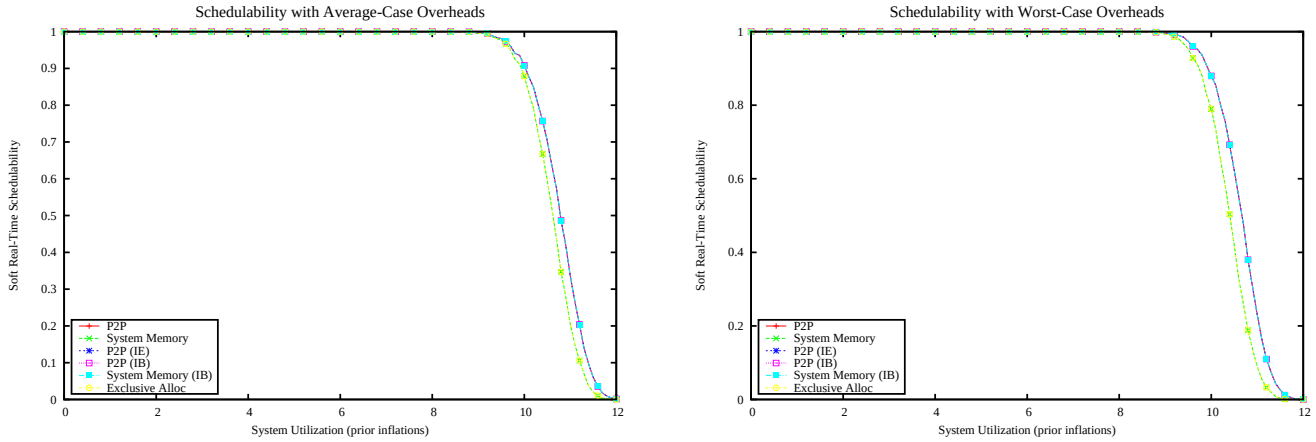

Figure 7686: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

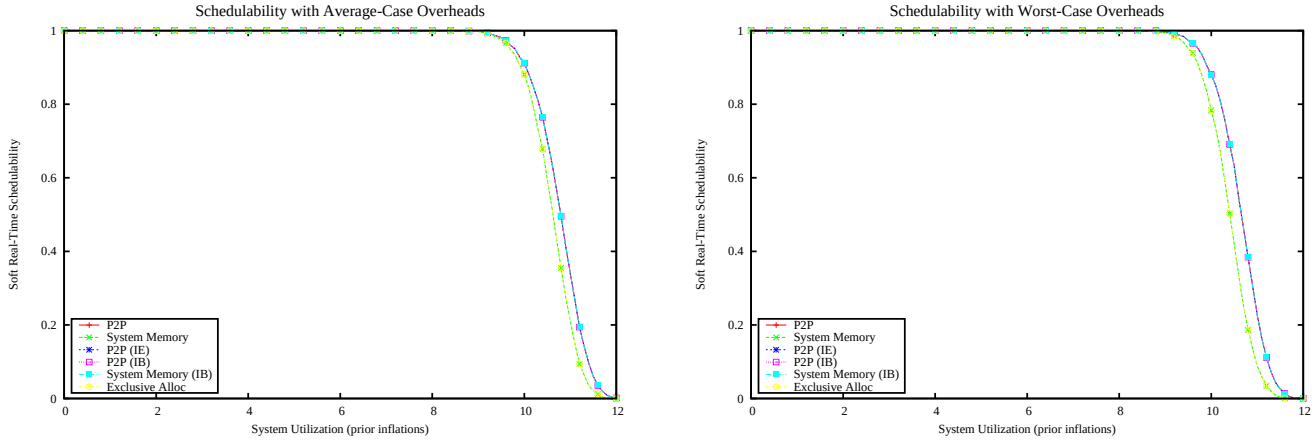

Figure 7687: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

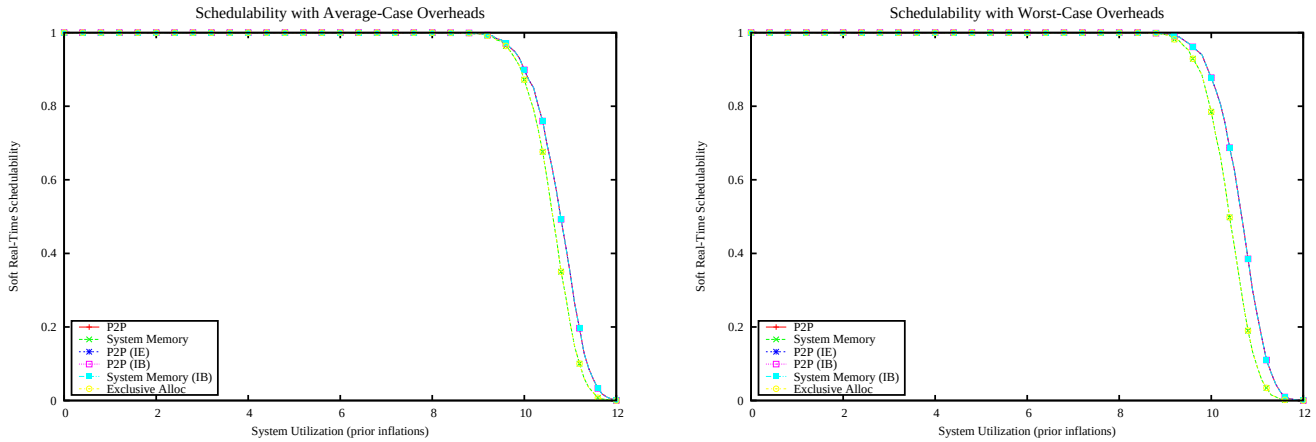

Figure 7688: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

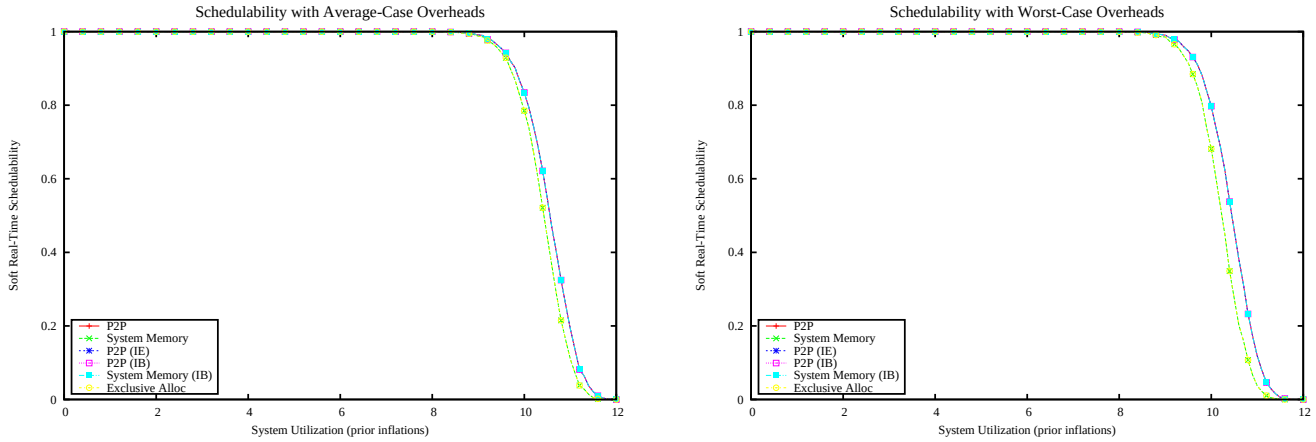

Figure 7689: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

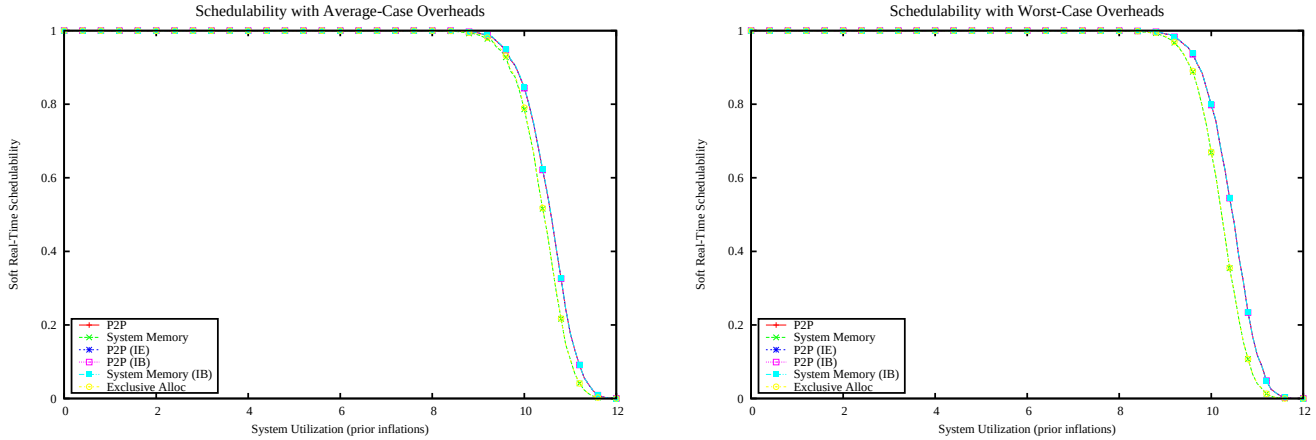

Figure 7690: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

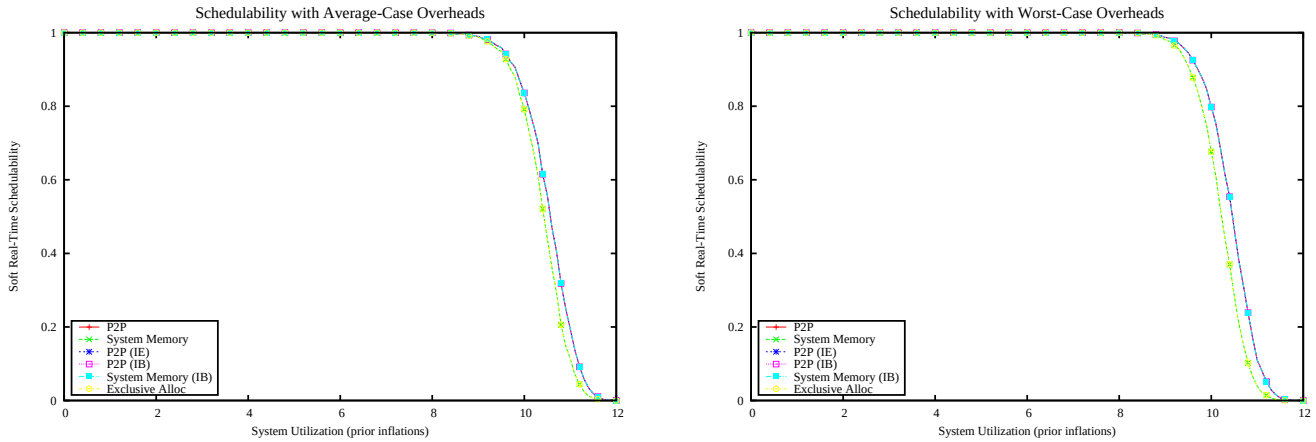

Figure 7691: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

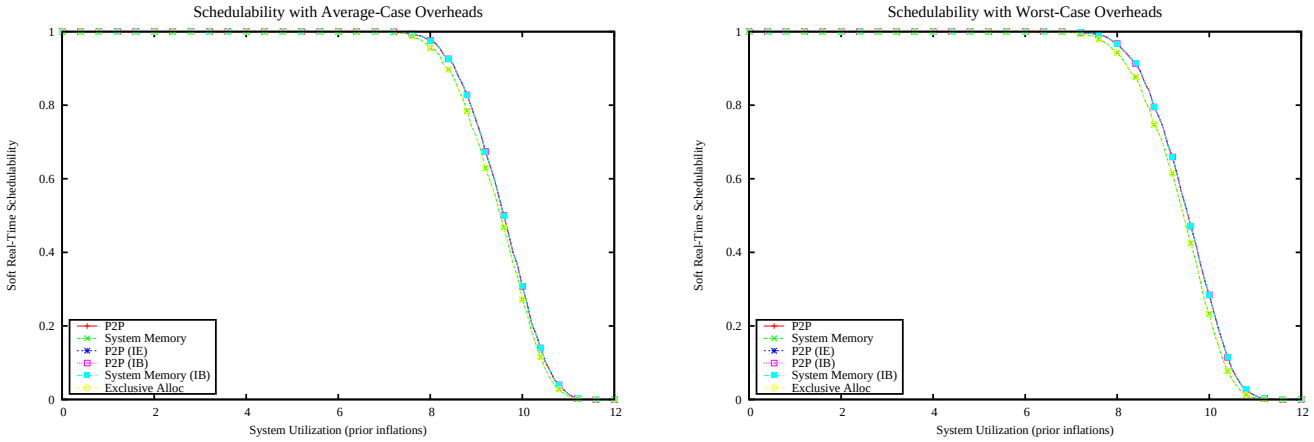

Figure 7692: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

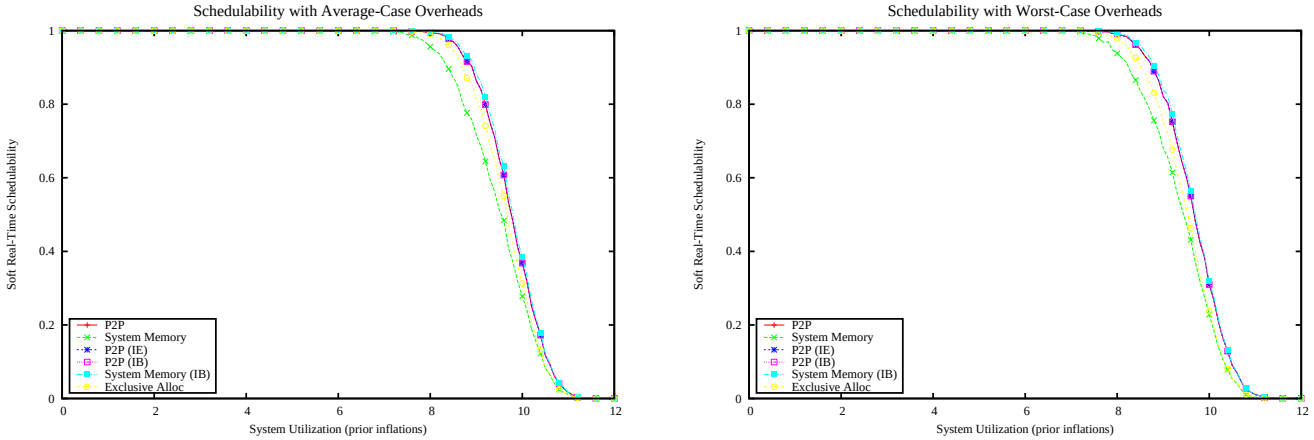

Figure 7693: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

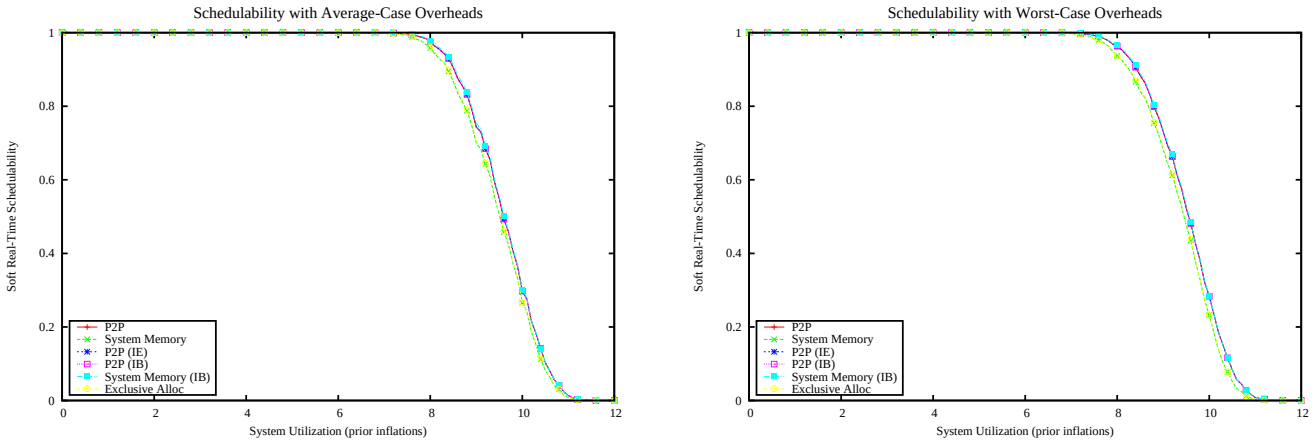

Figure 7694: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

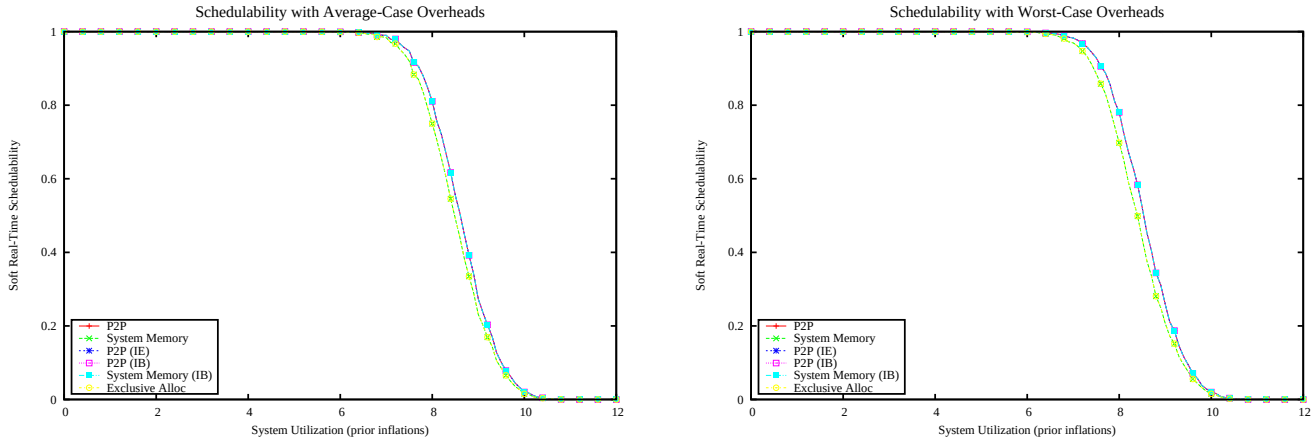

Figure 7695: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

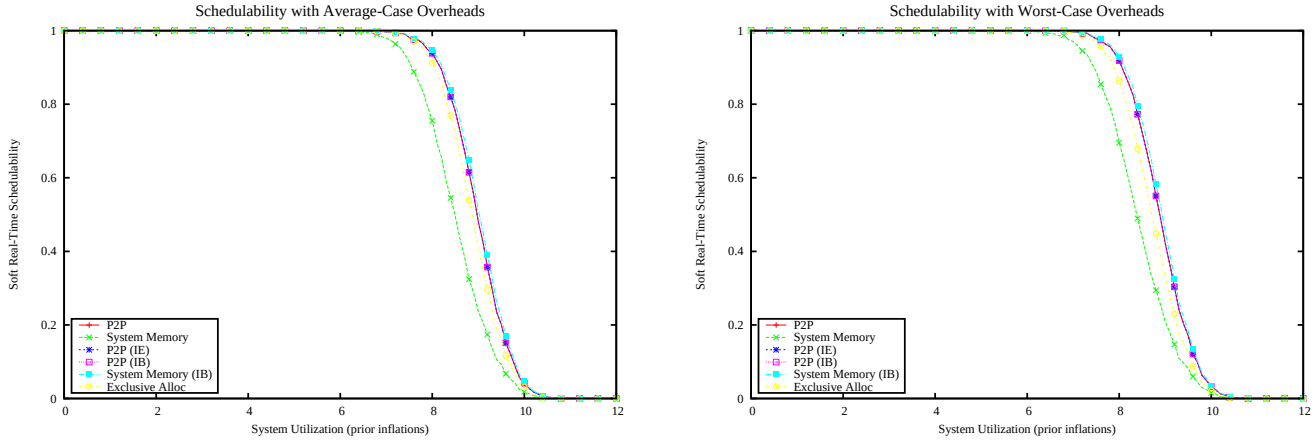

Figure 7696: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

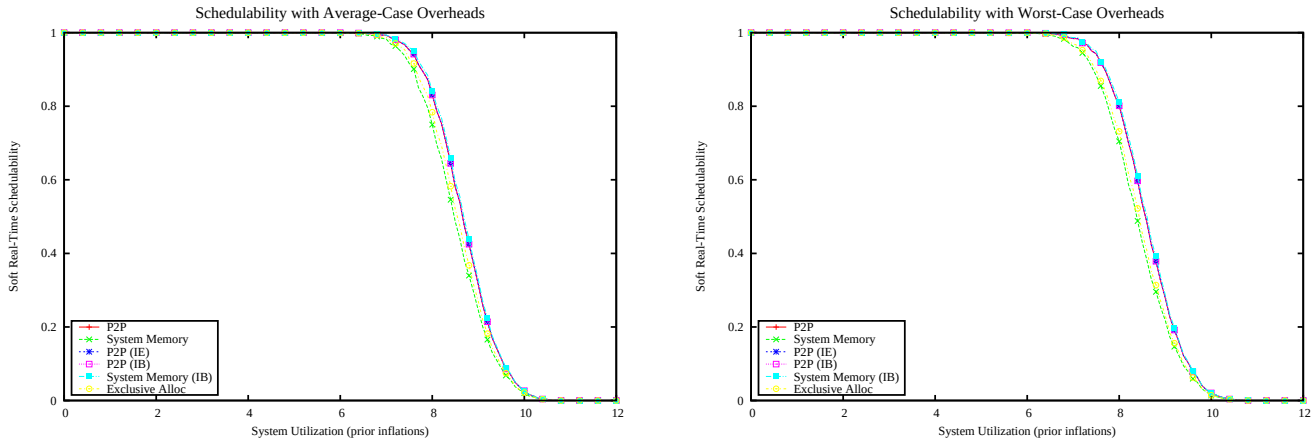

Figure 7697: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

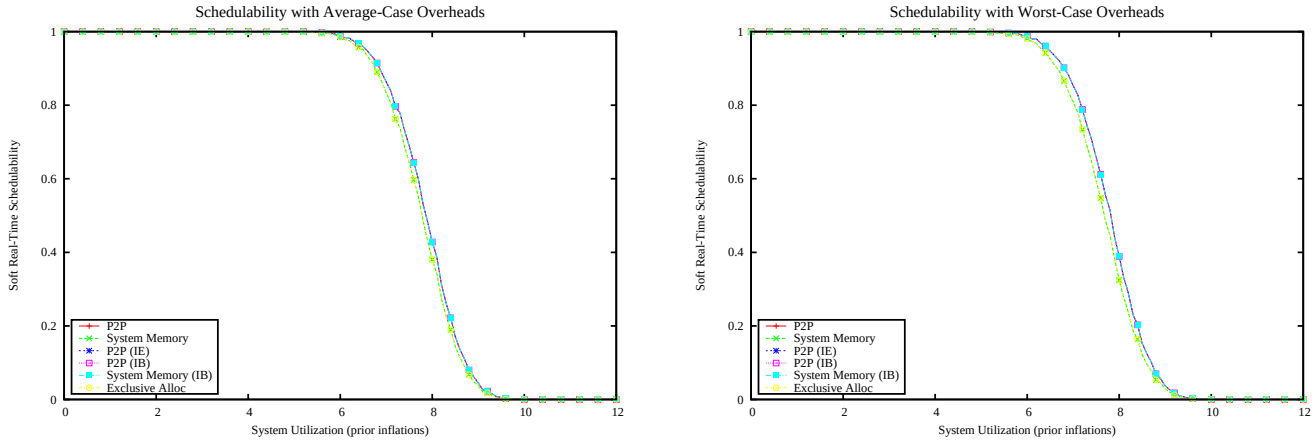

Figure 7698: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

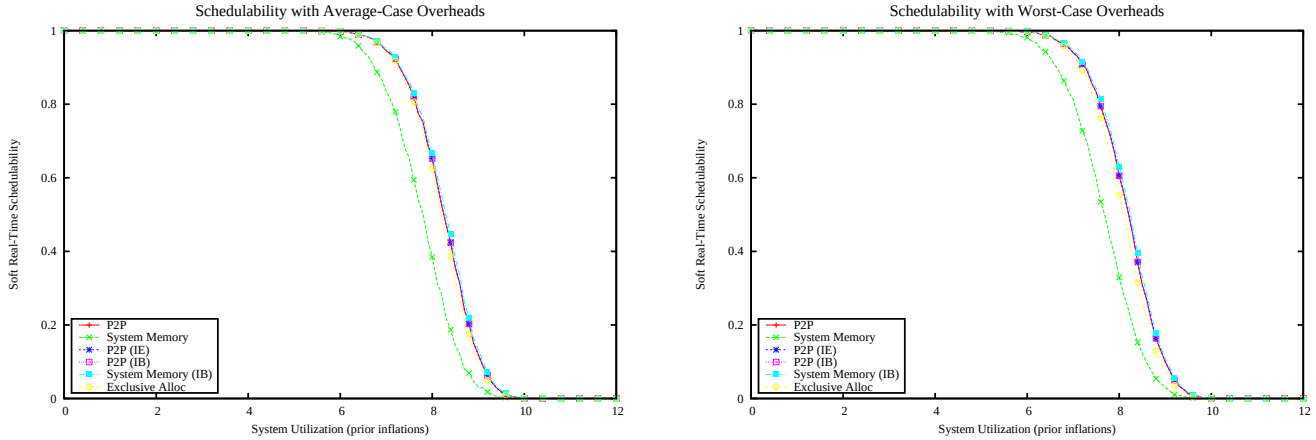

Figure 7699: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

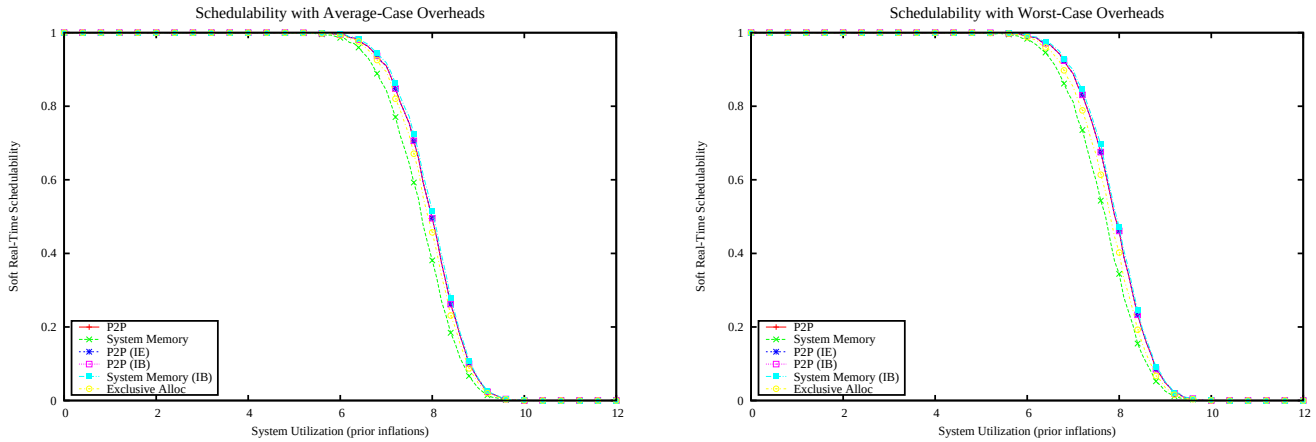

Figure 7700: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

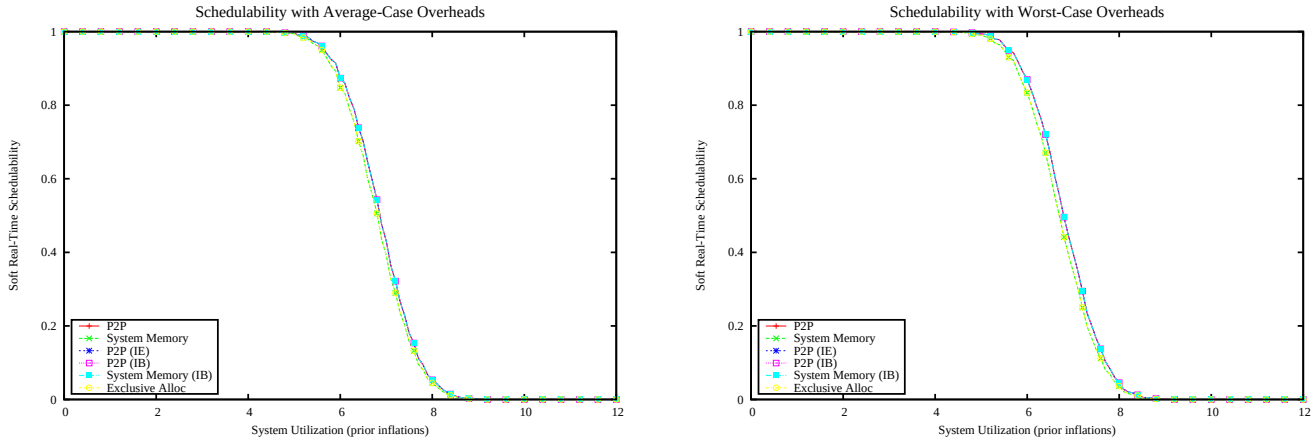

Figure 7701: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

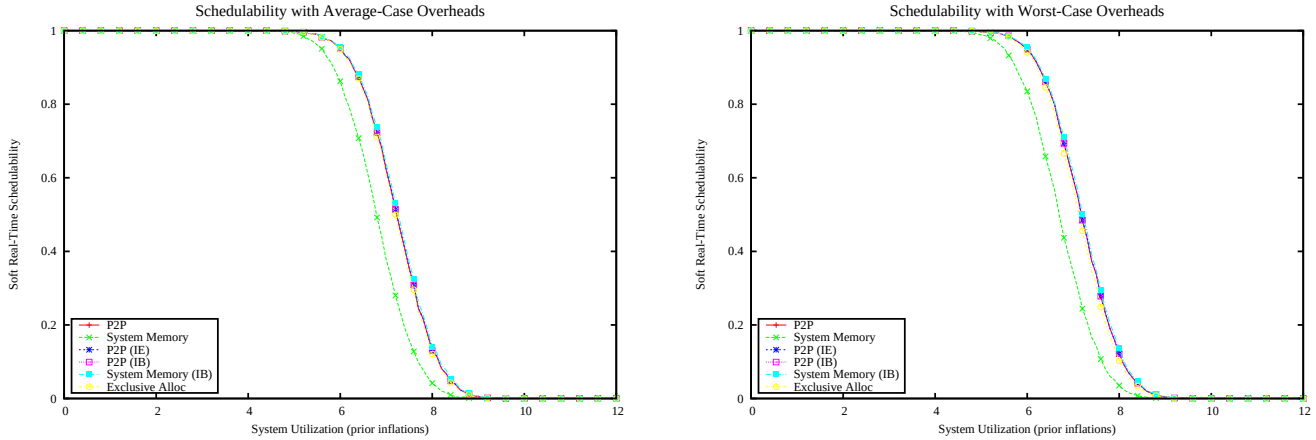

Figure 7702: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

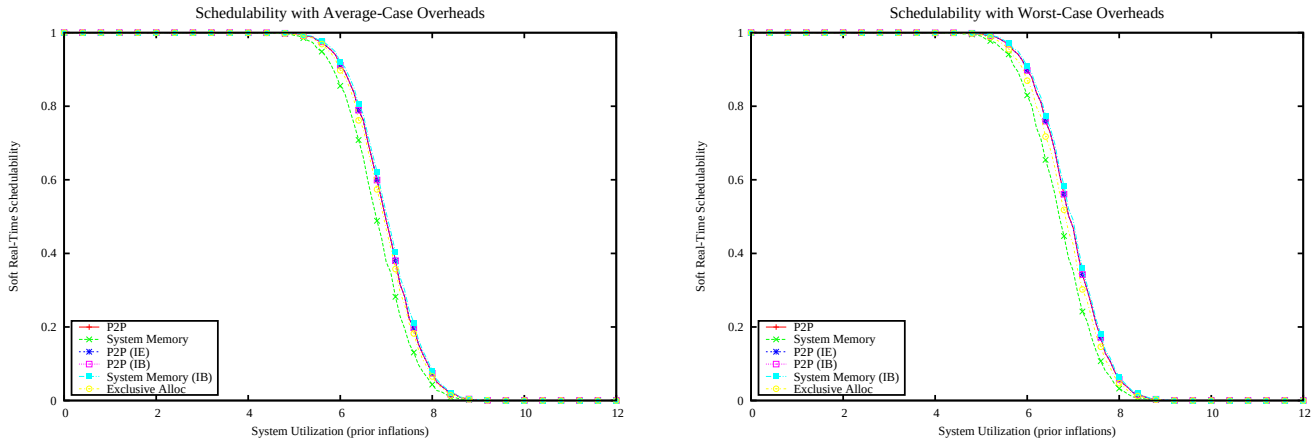

Figure 7703: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

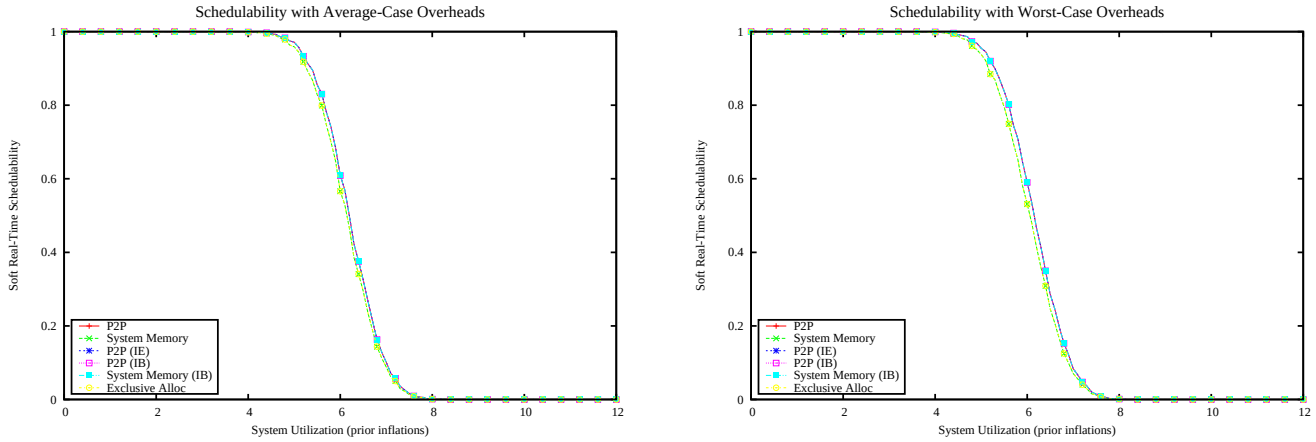

Figure 7704: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

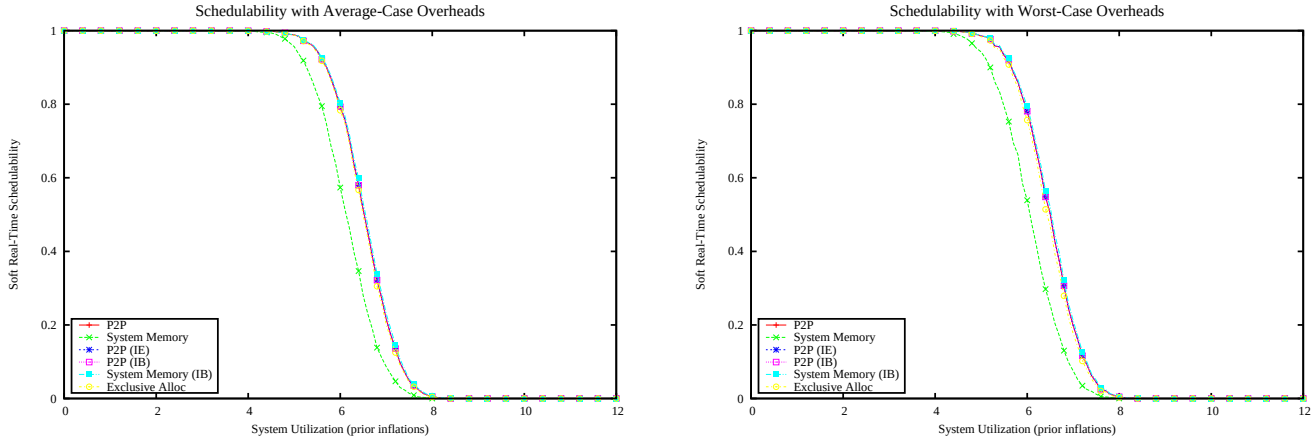

Figure 7705: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

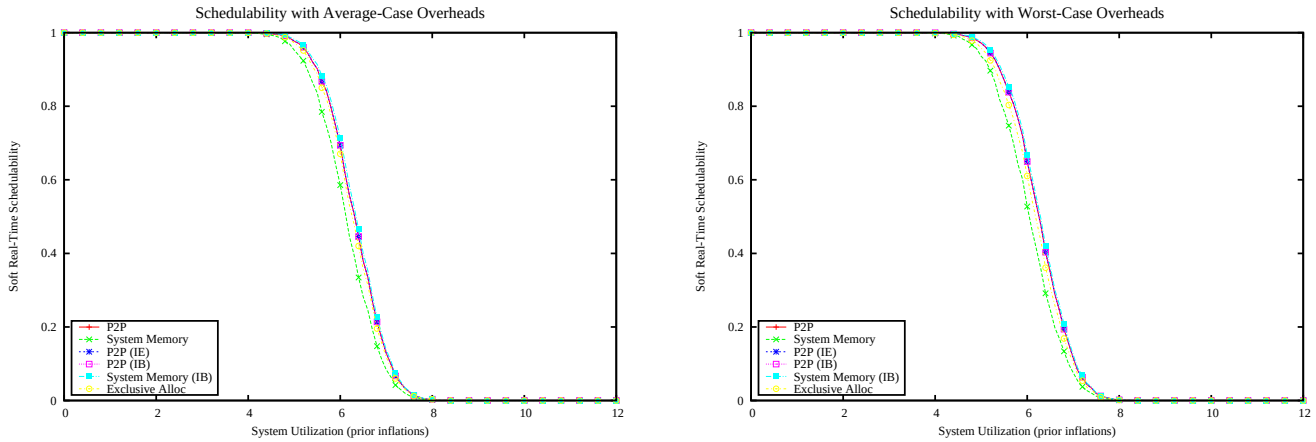

Figure 7706: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

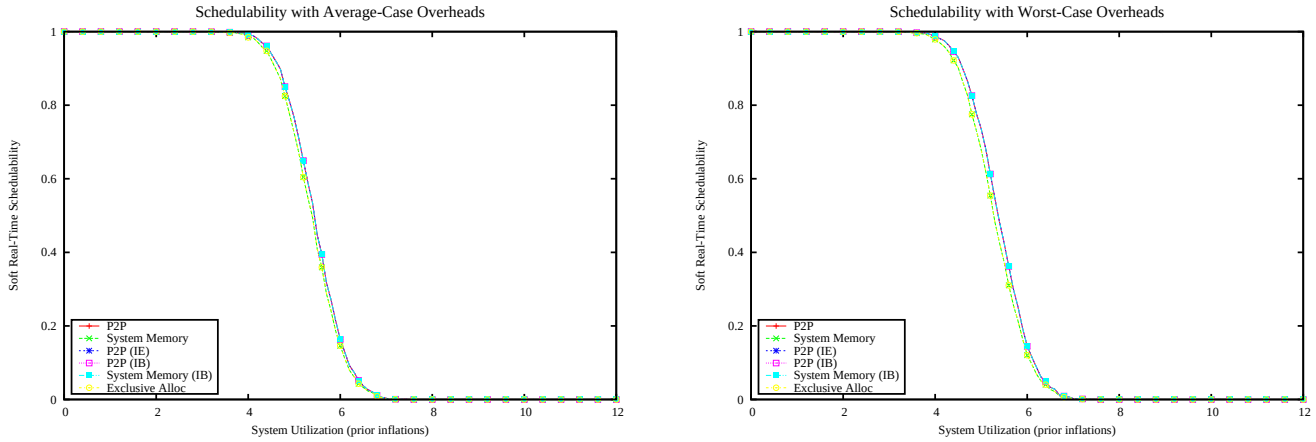

Figure 7707: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

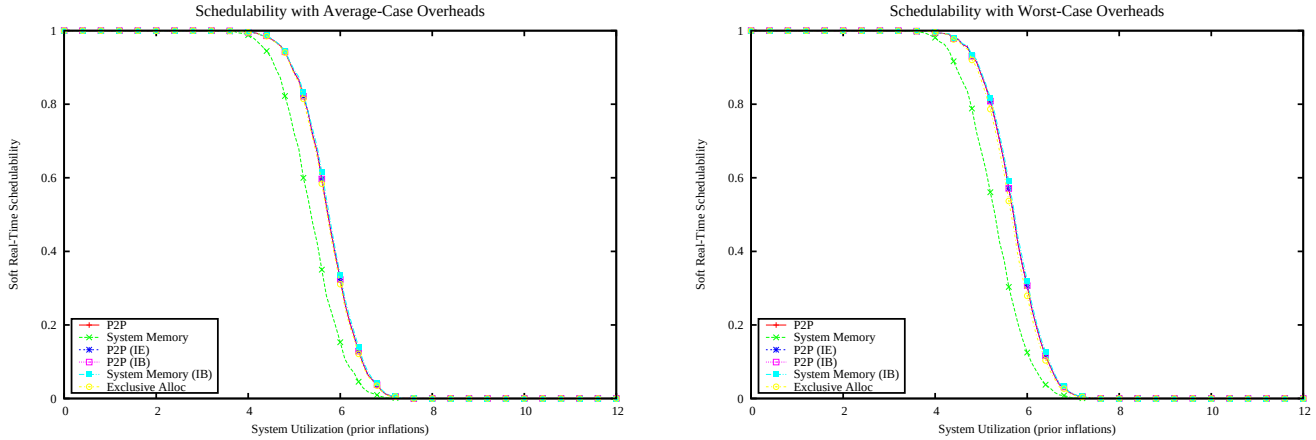

Figure 7708: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

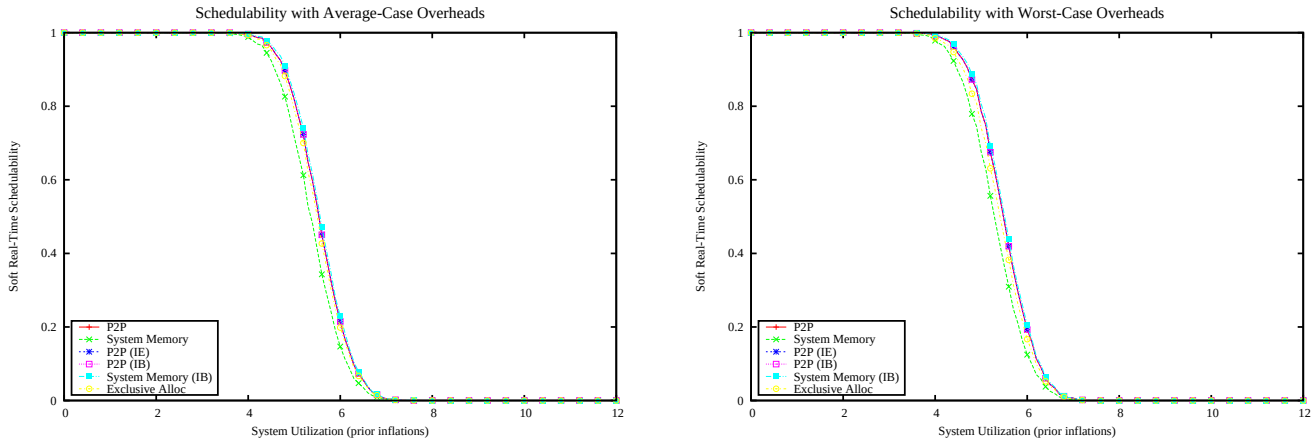

Figure 7709: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

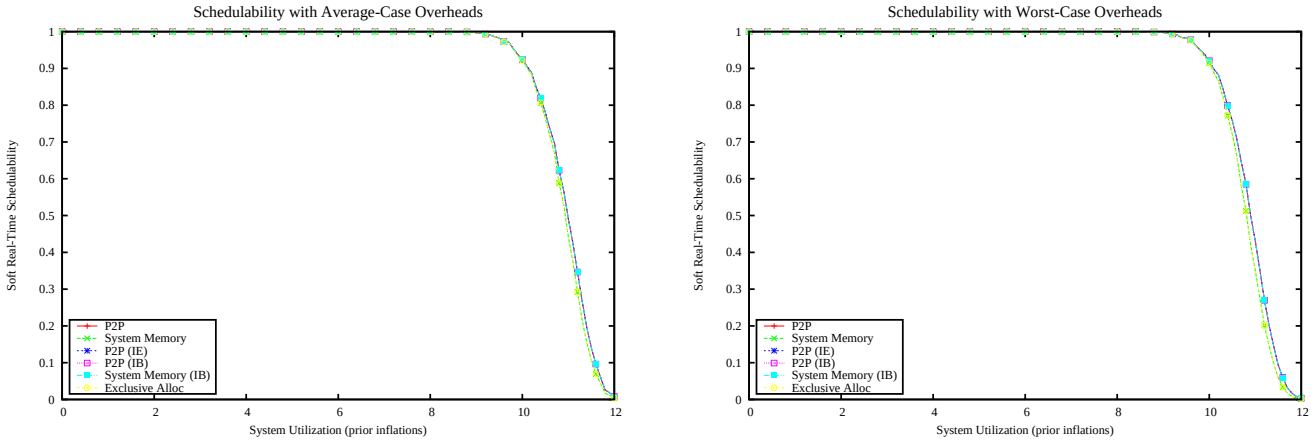

Figure 7710: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

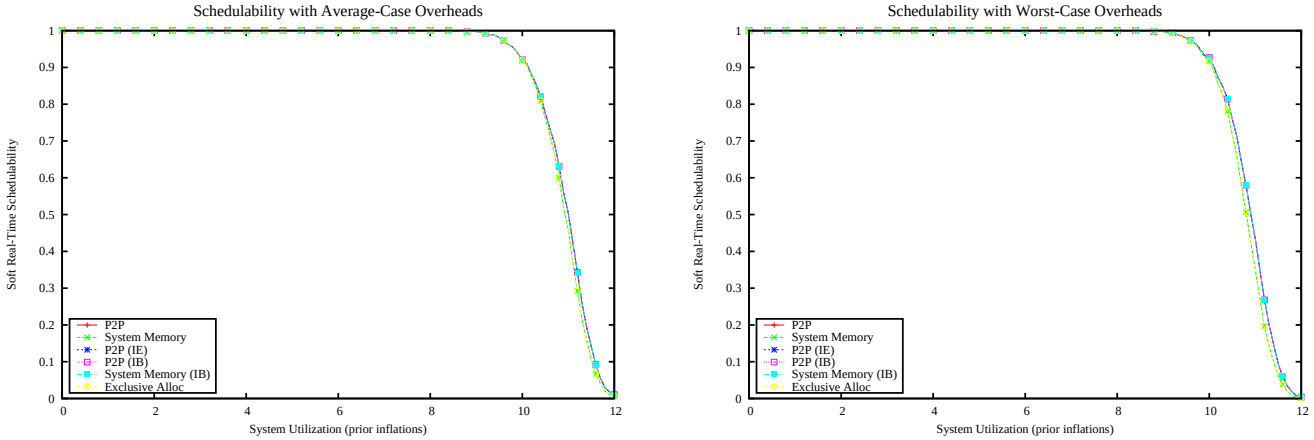

Figure 7711: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

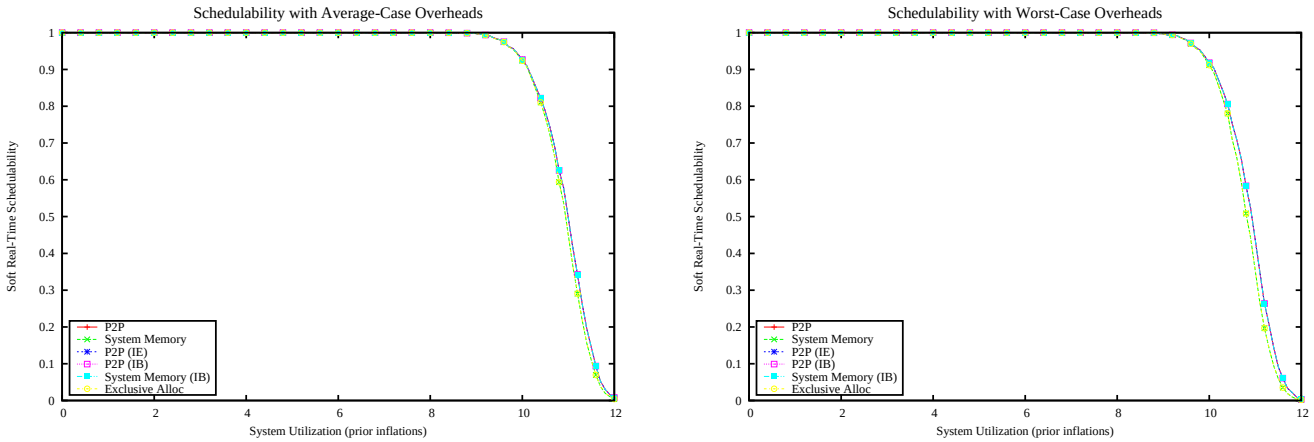

Figure 7712: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

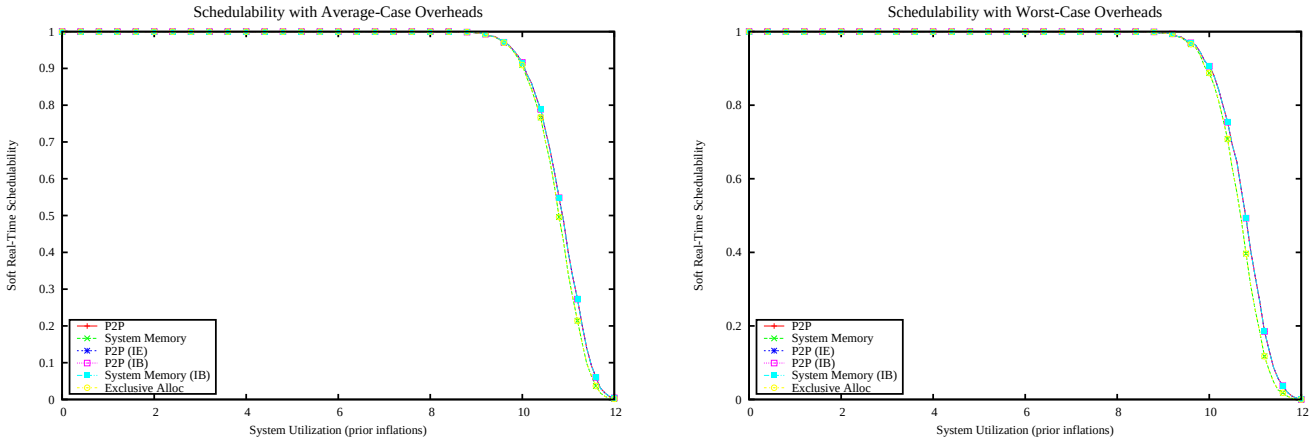

Figure 7713: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

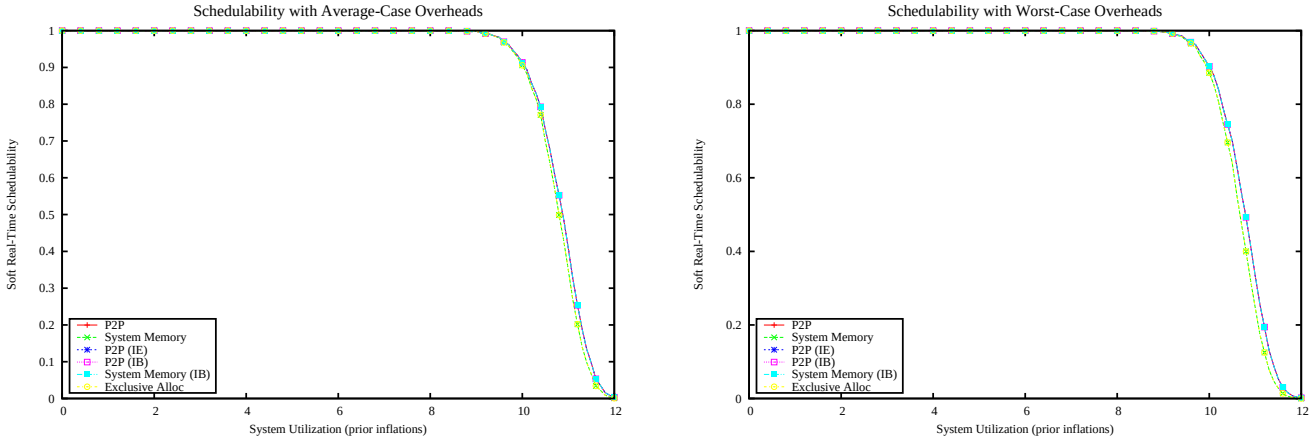

Figure 7714: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

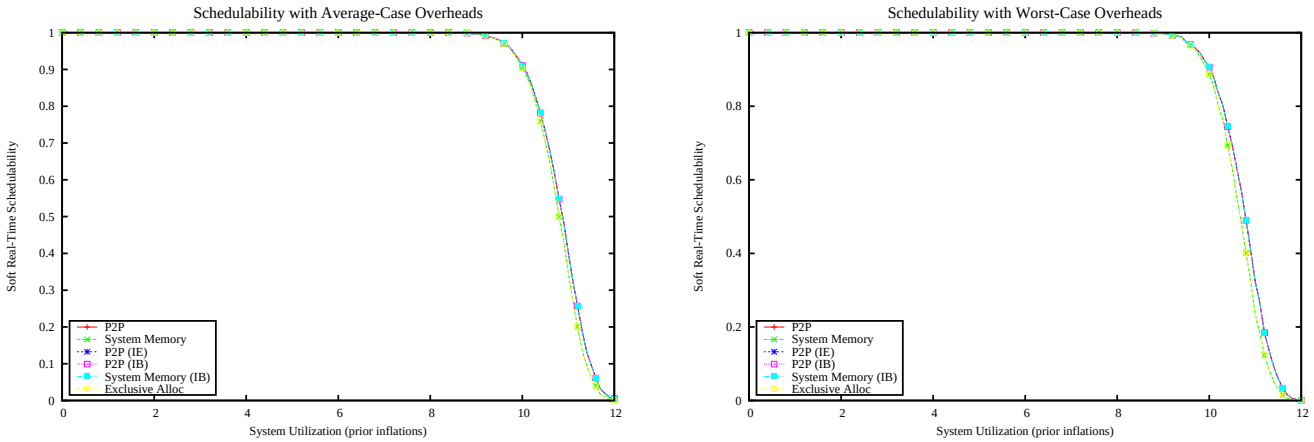

Figure 7715: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

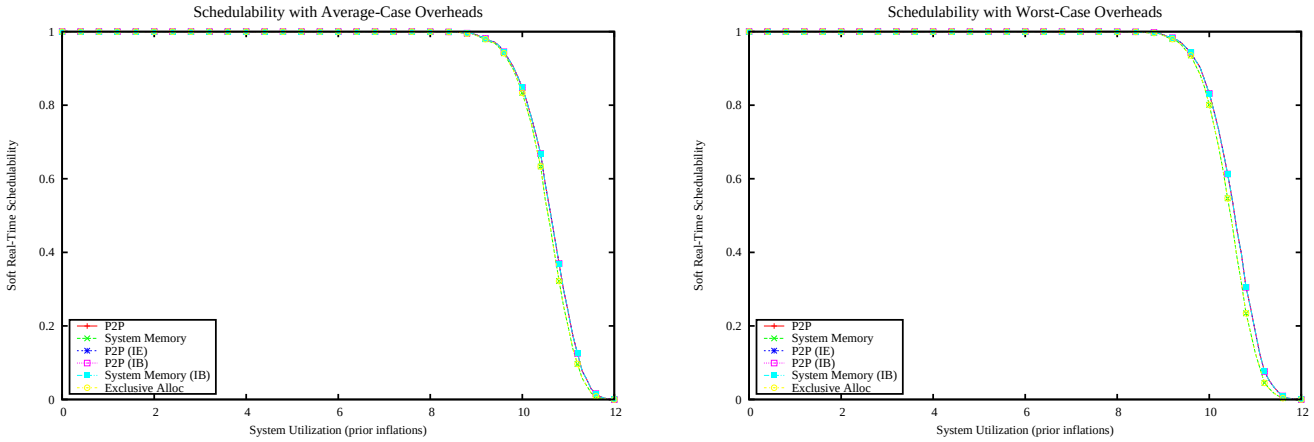

Figure 7716: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

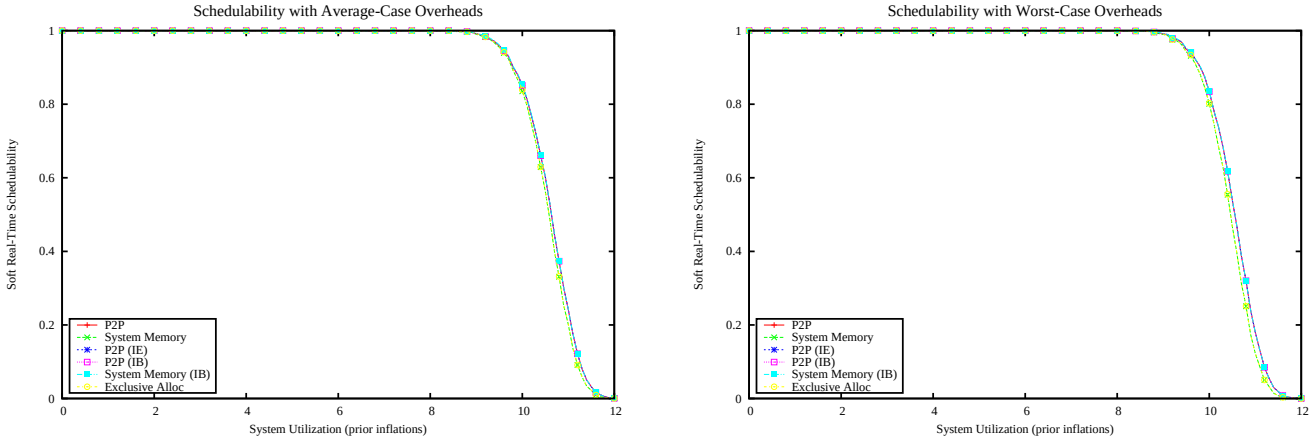

Figure 7717: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

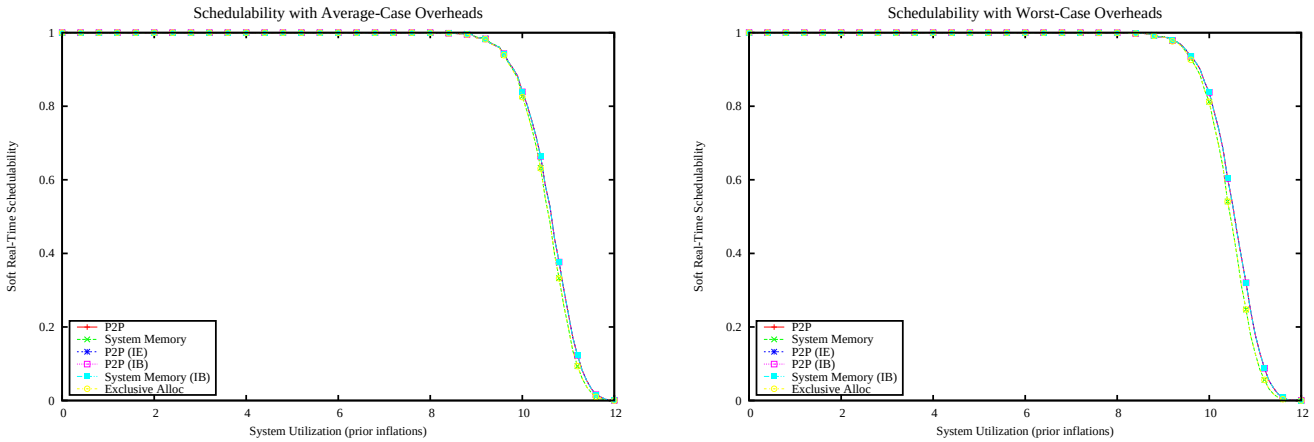

Figure 7718: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

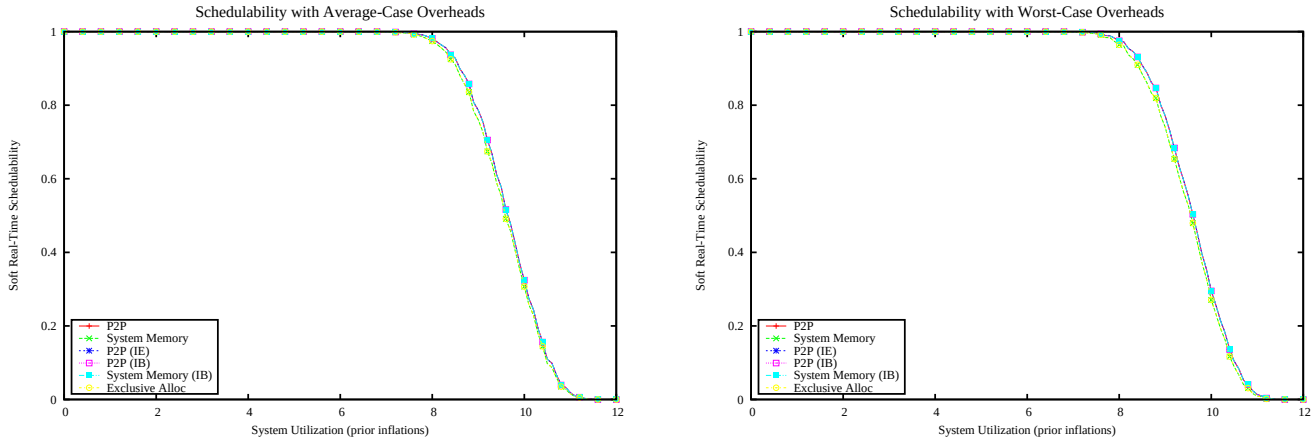

Figure 7719: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

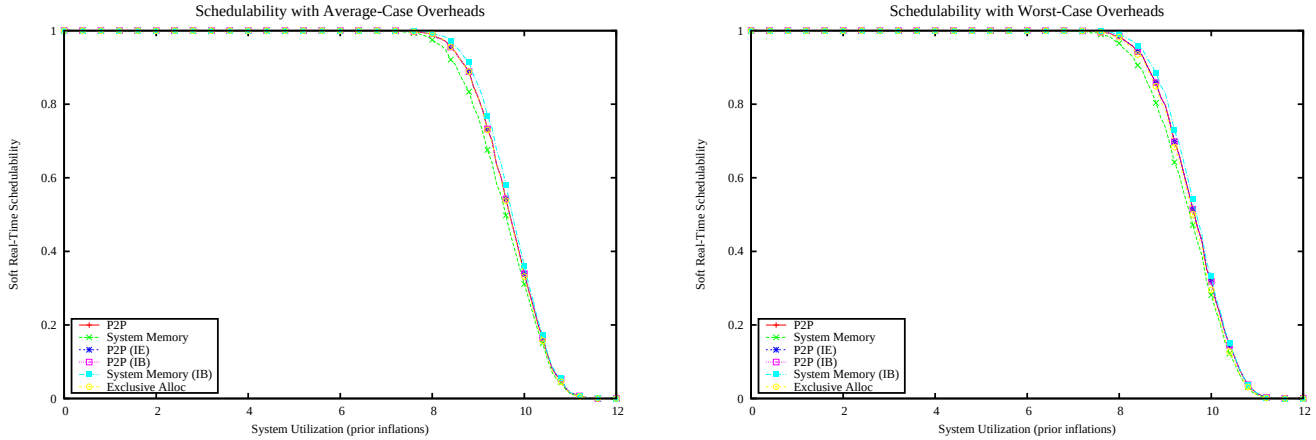

Figure 7720: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

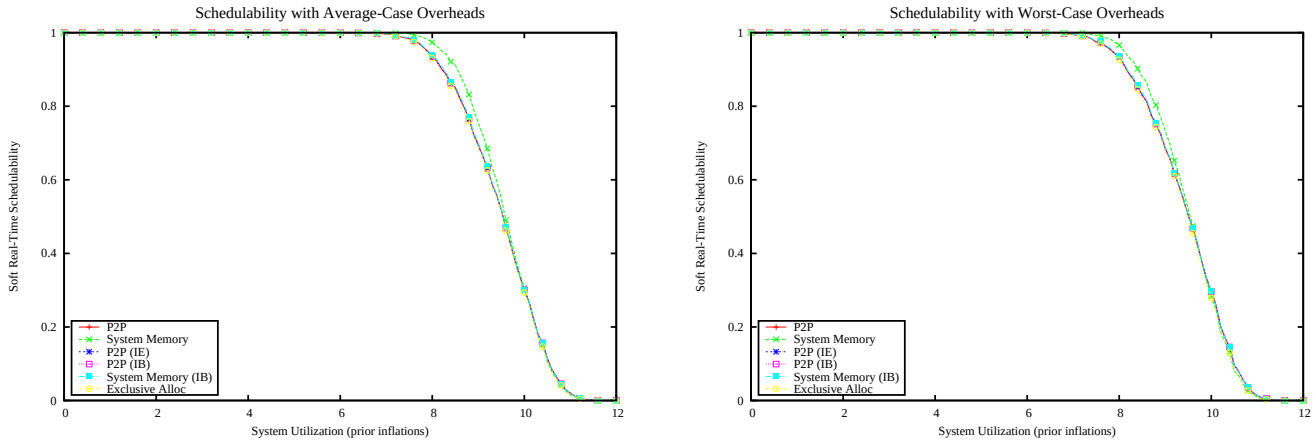

Figure 7721: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

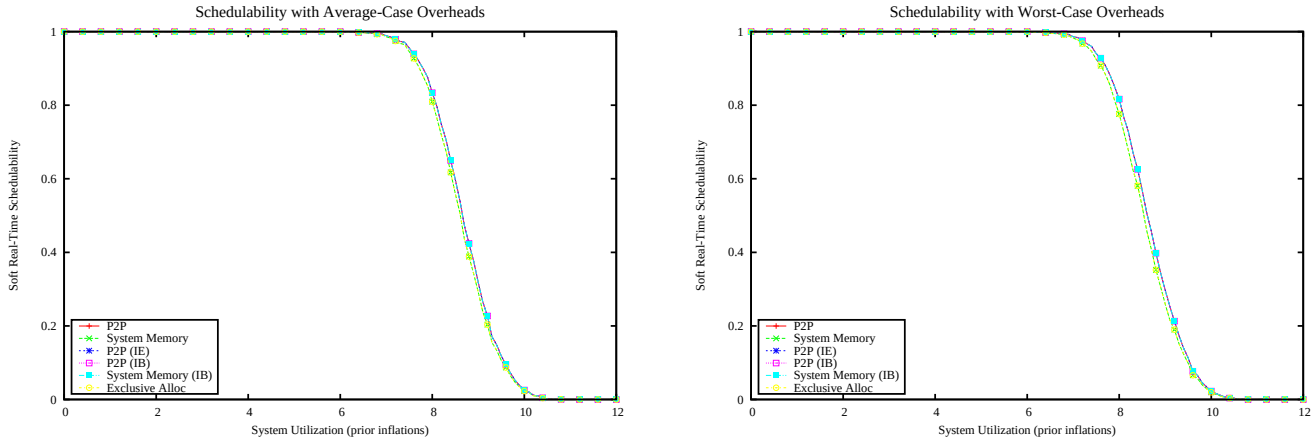

Figure 7722: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

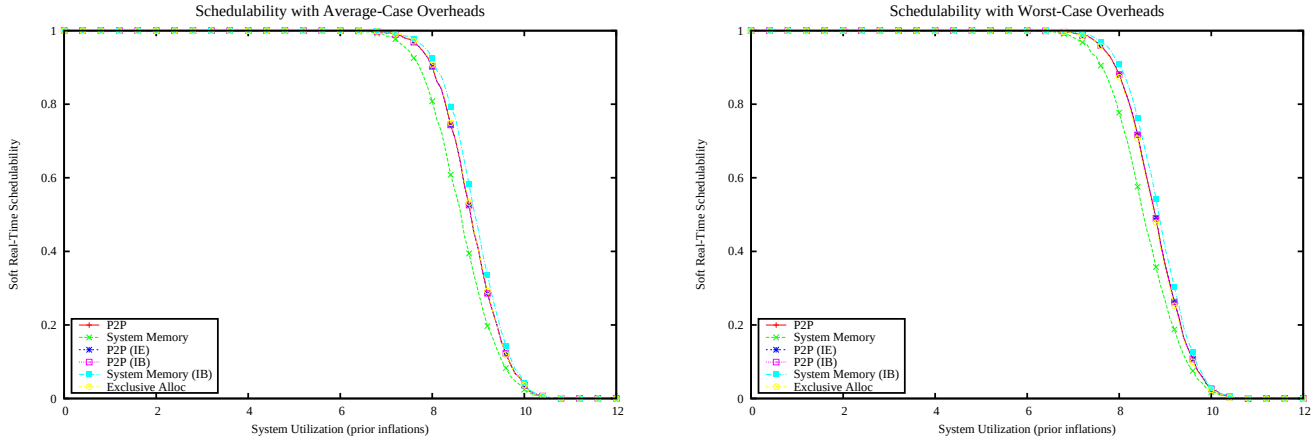

Figure 7723: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

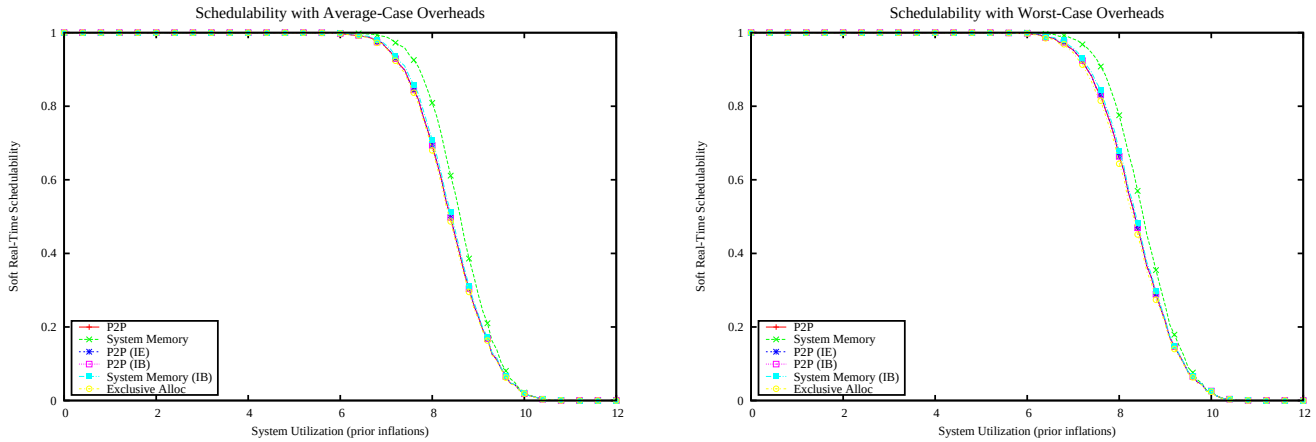

Figure 7724: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

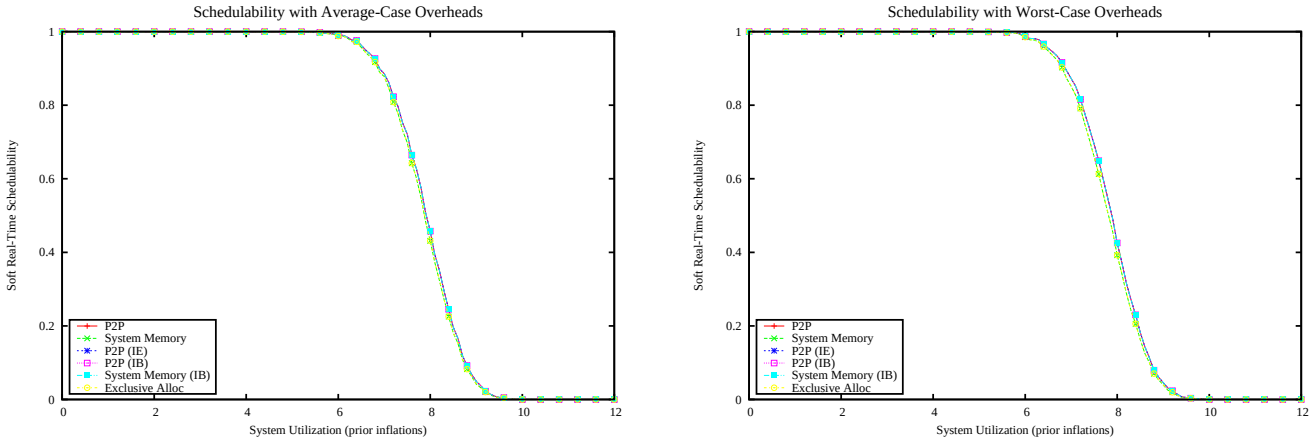

Figure 7725: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

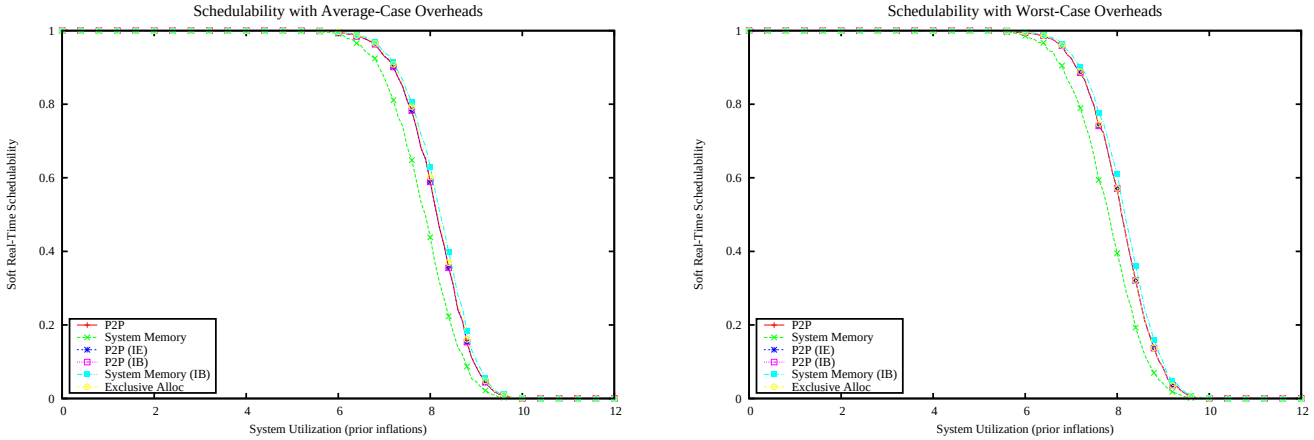

Figure 7726: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

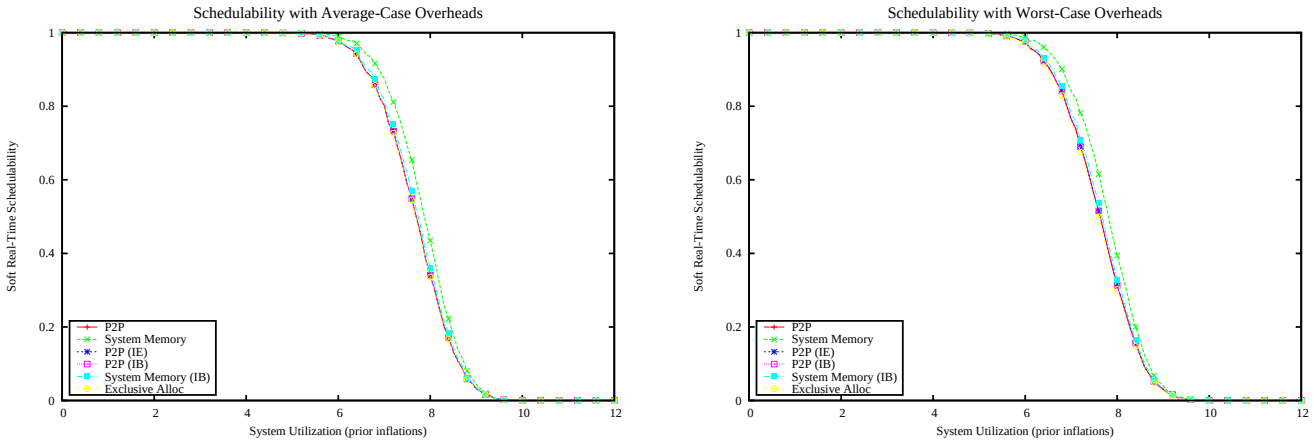

Figure 7727: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

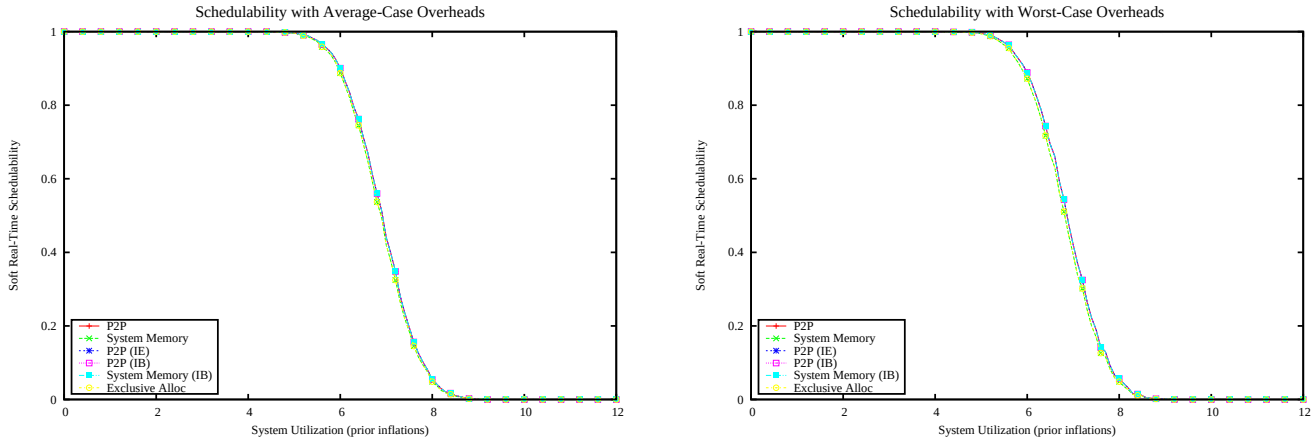

Figure 7728: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

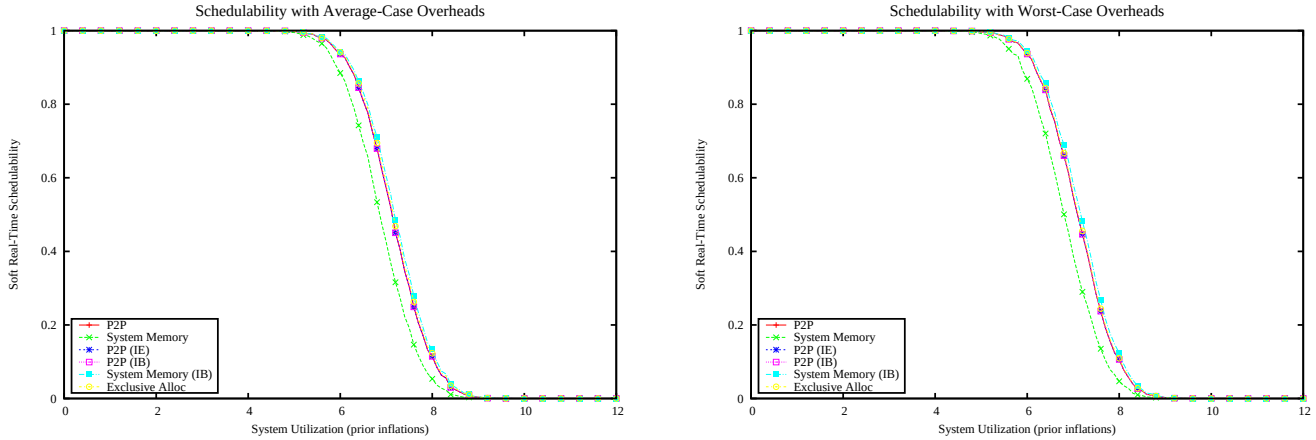

Figure 7729: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

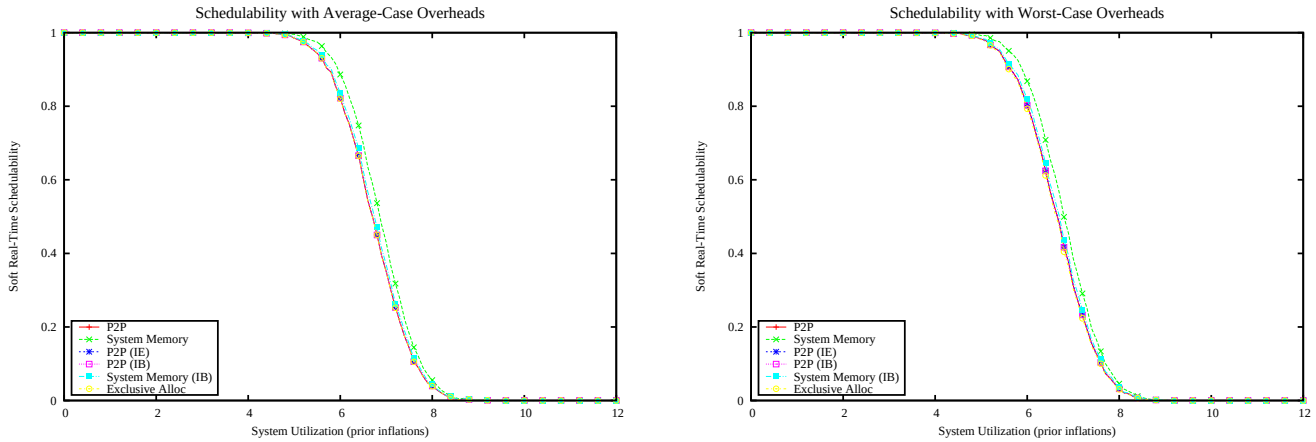

Figure 7730: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

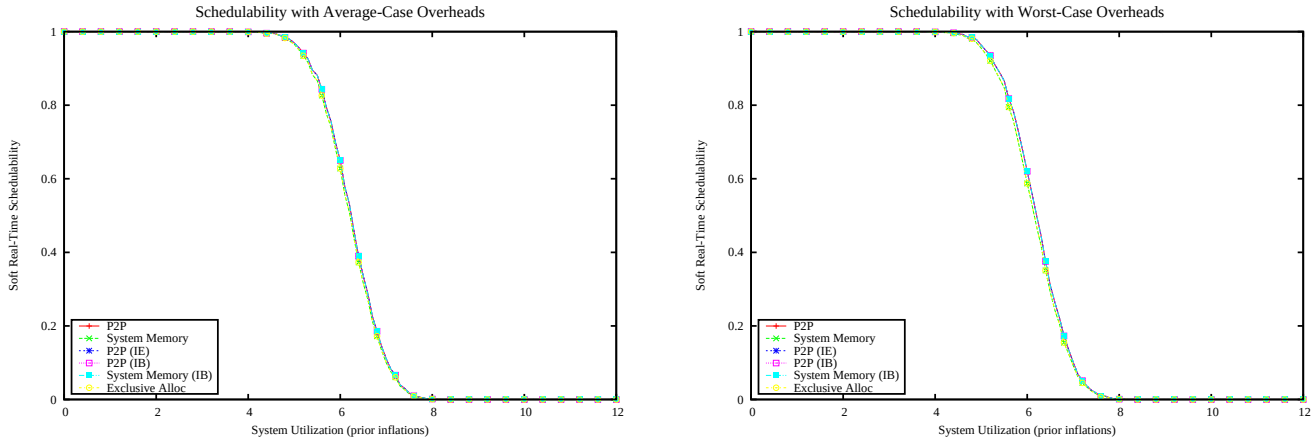

Figure 7731: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

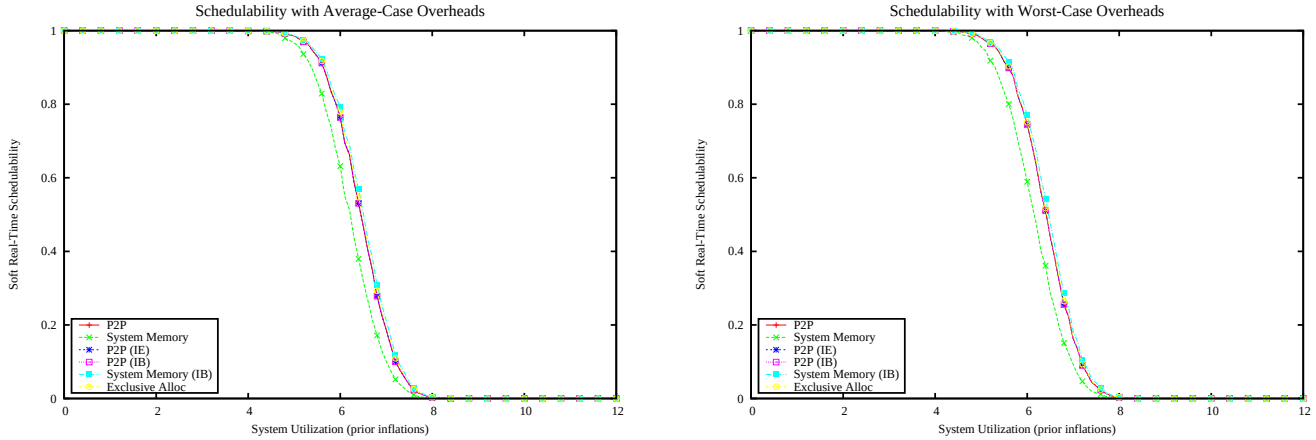

Figure 7732: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

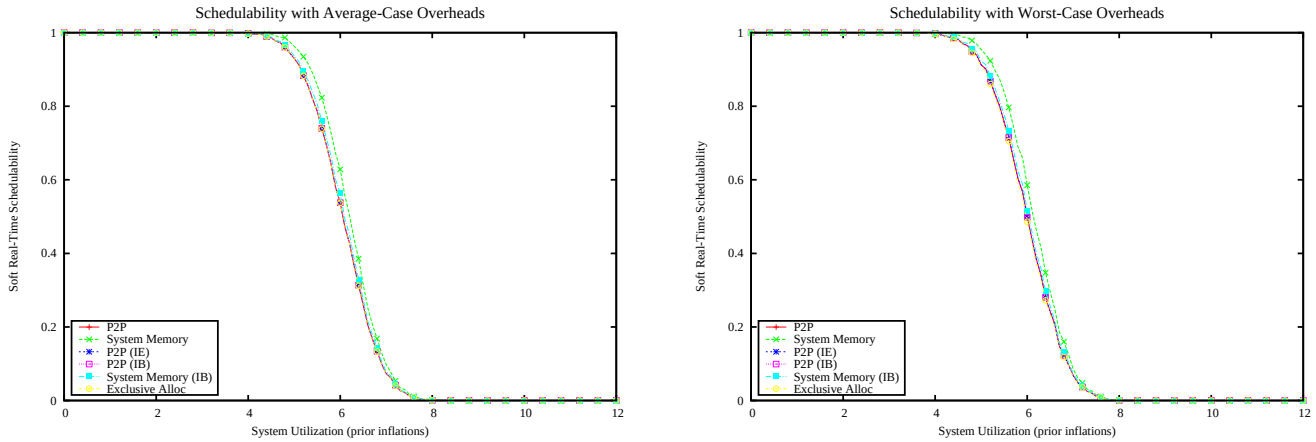

Figure 7733: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

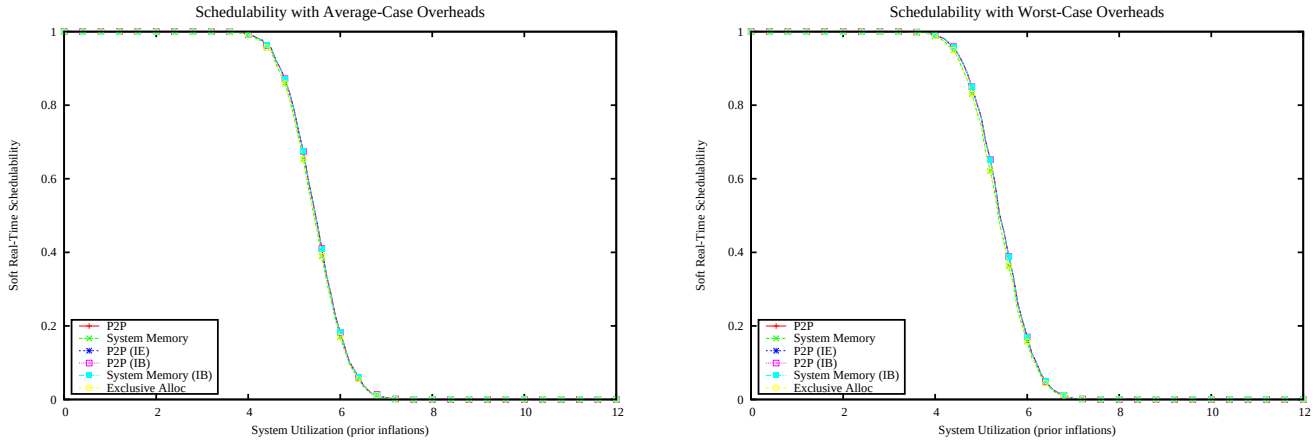

Figure 7734: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

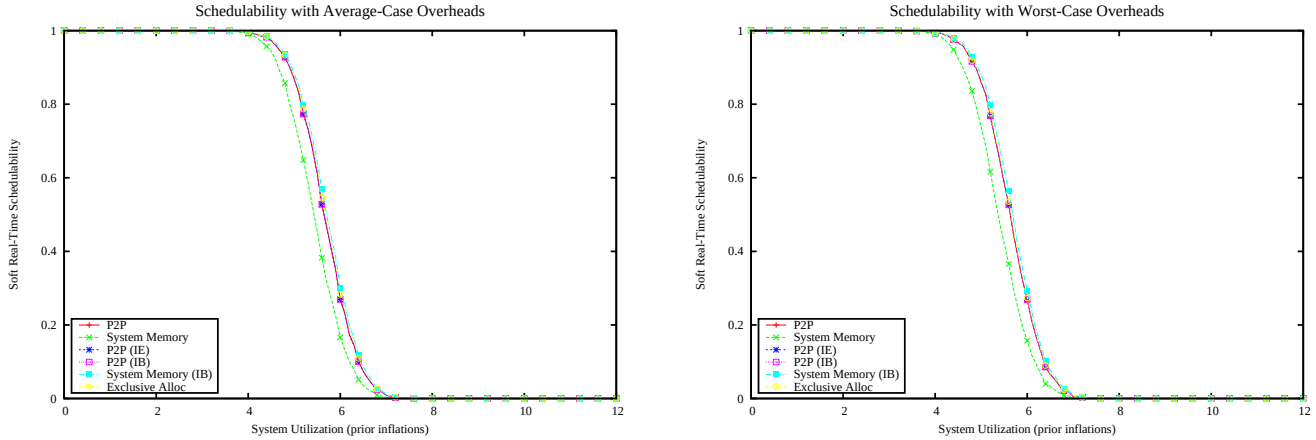

Figure 7735: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

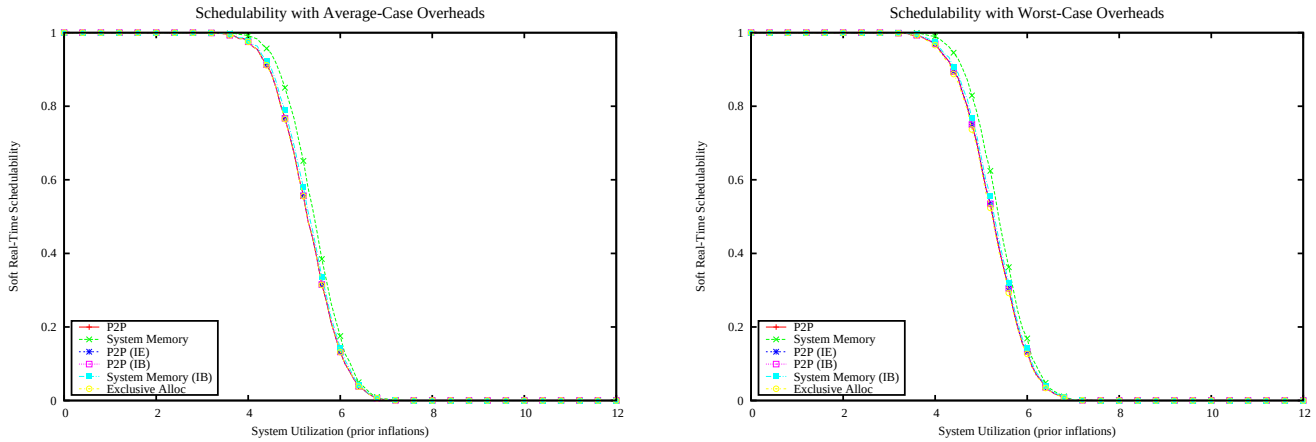

Figure 7736: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 32MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

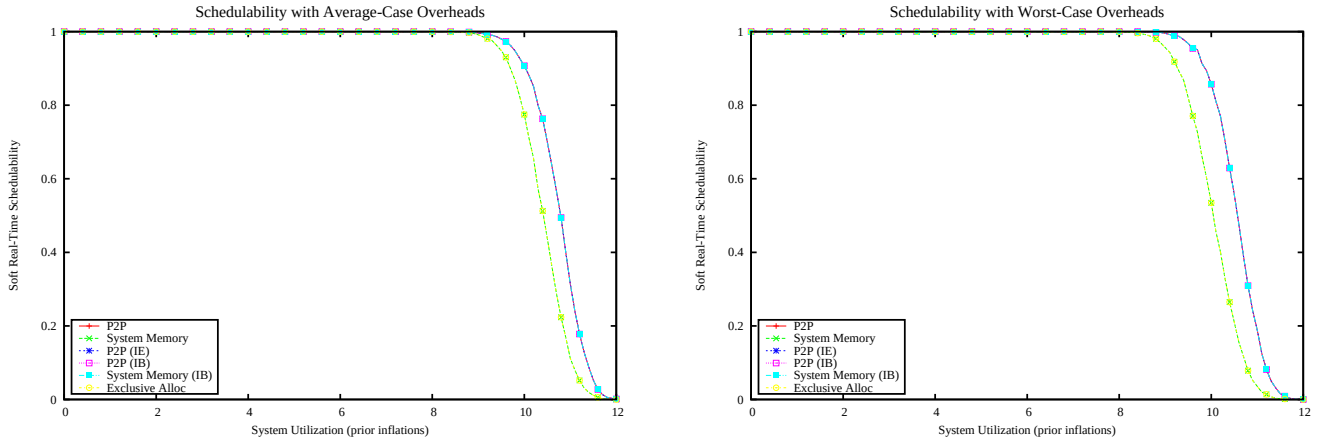

Figure 7737: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

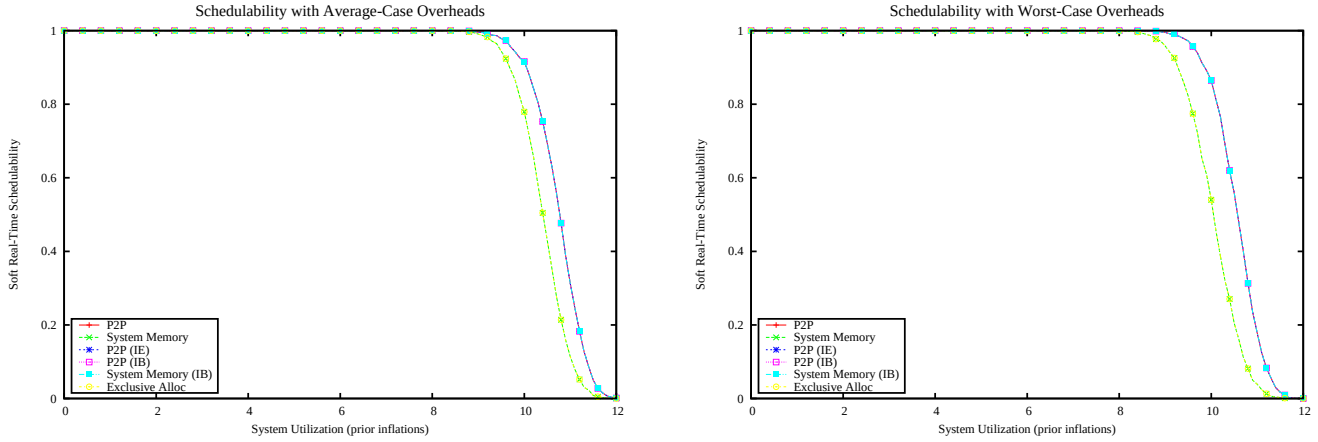

Figure 7738: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

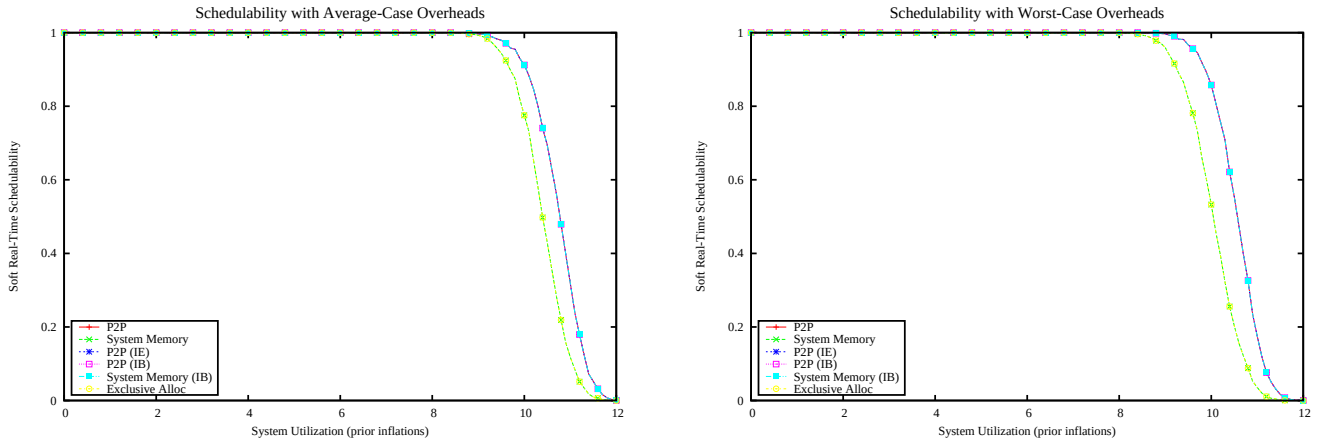

Figure 7739: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [10%,20%]

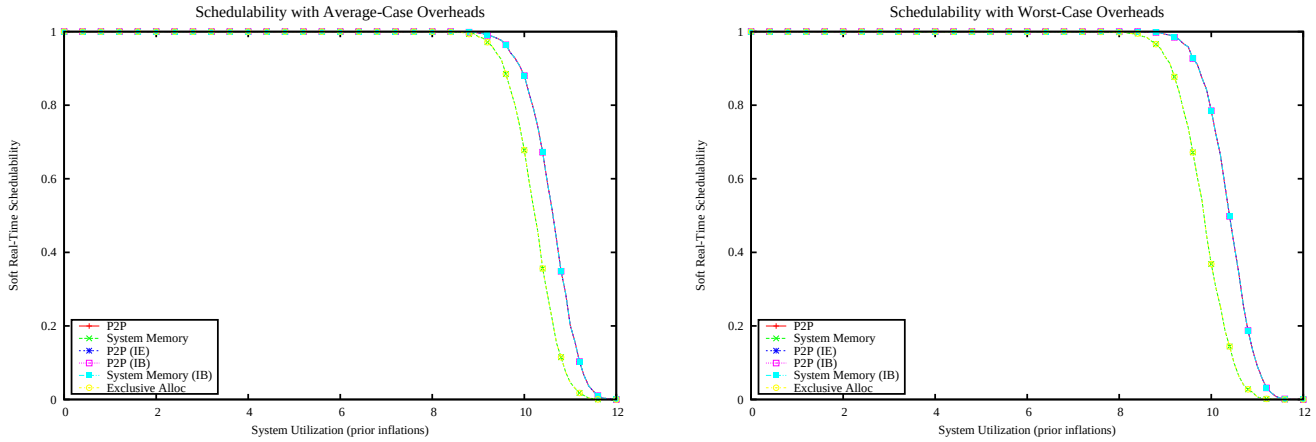

Figure 7740: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

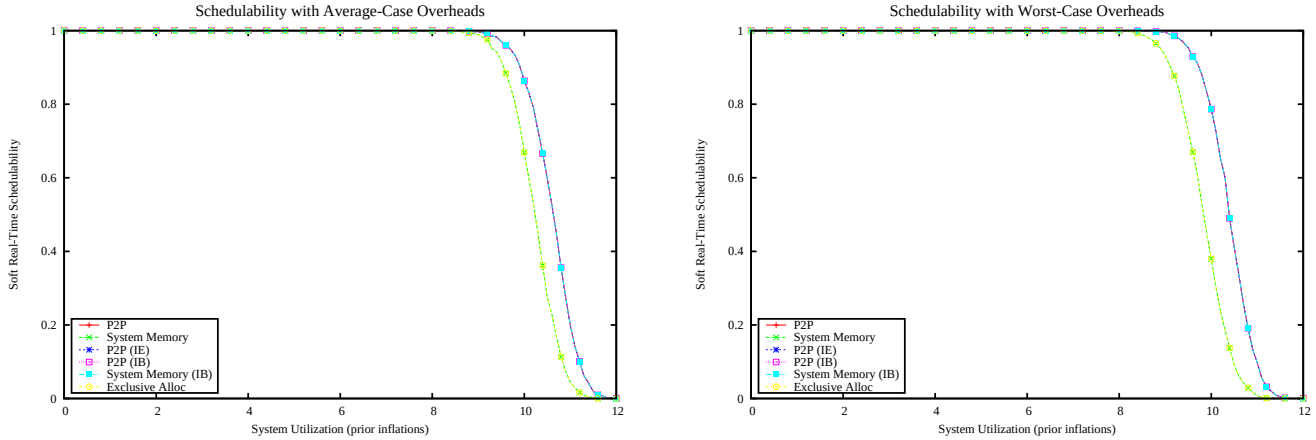

Figure 7741: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

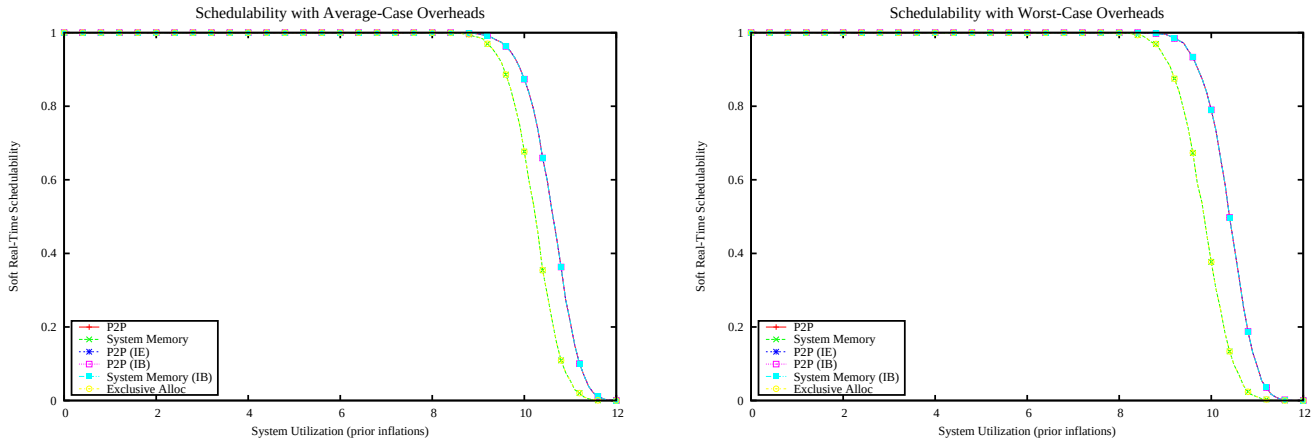

Figure 7742: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [20%,30%]

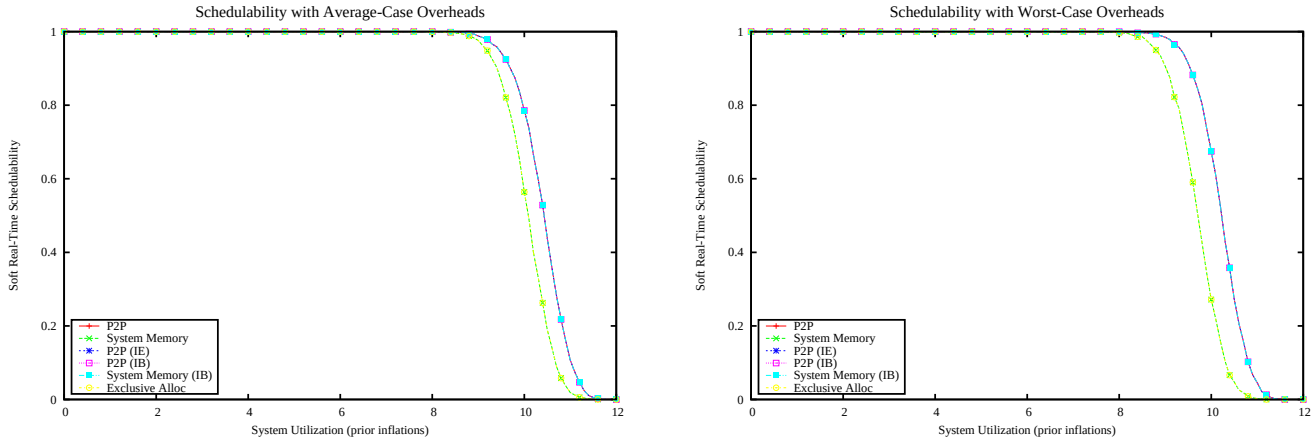

Figure 7743: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

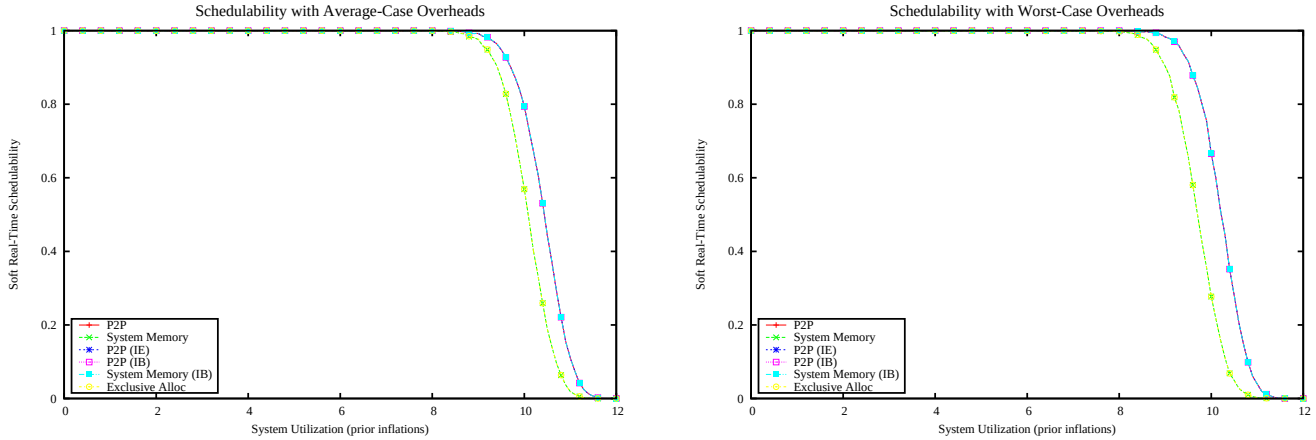

Figure 7744: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

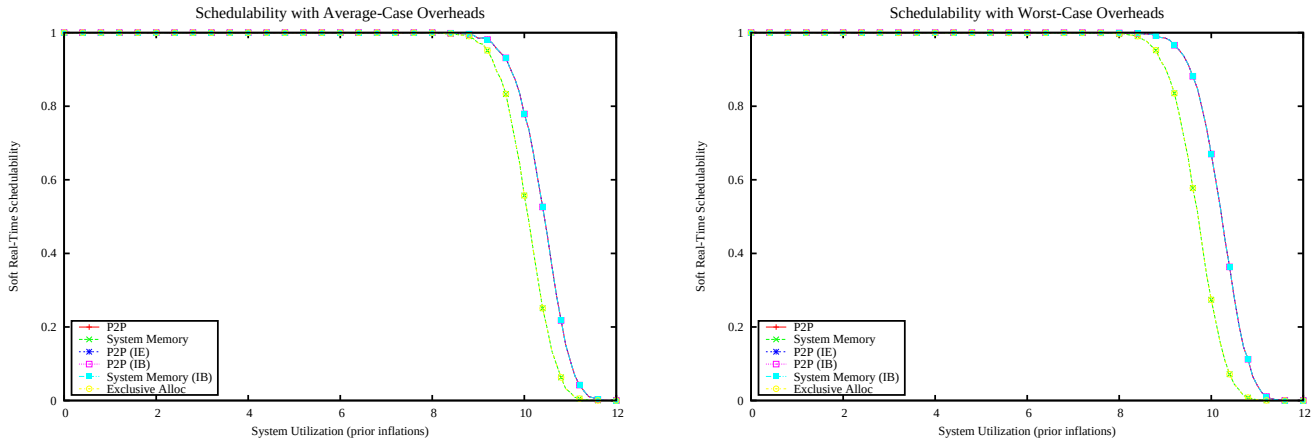

Figure 7745: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [30%,40%]

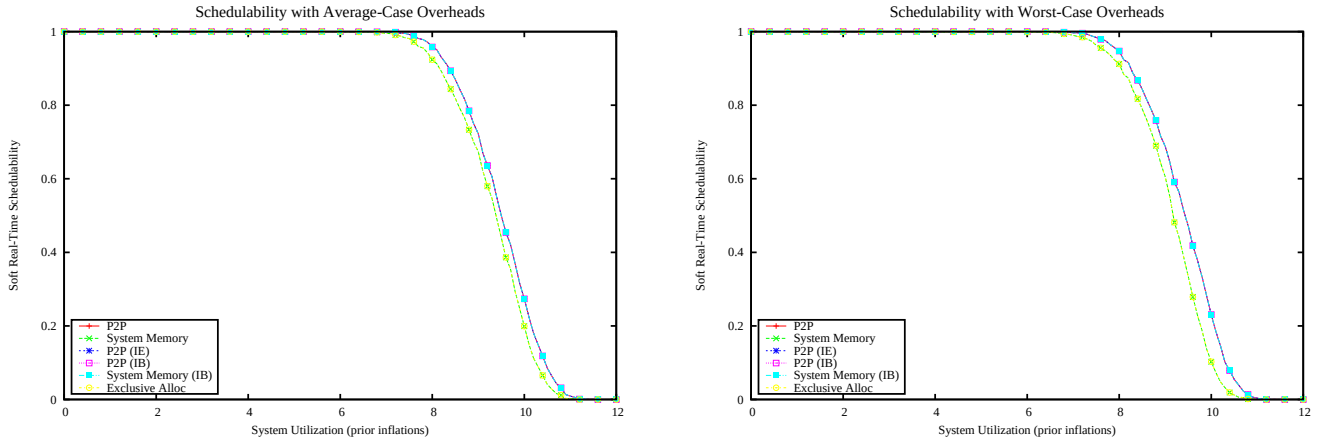

Figure 7746: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

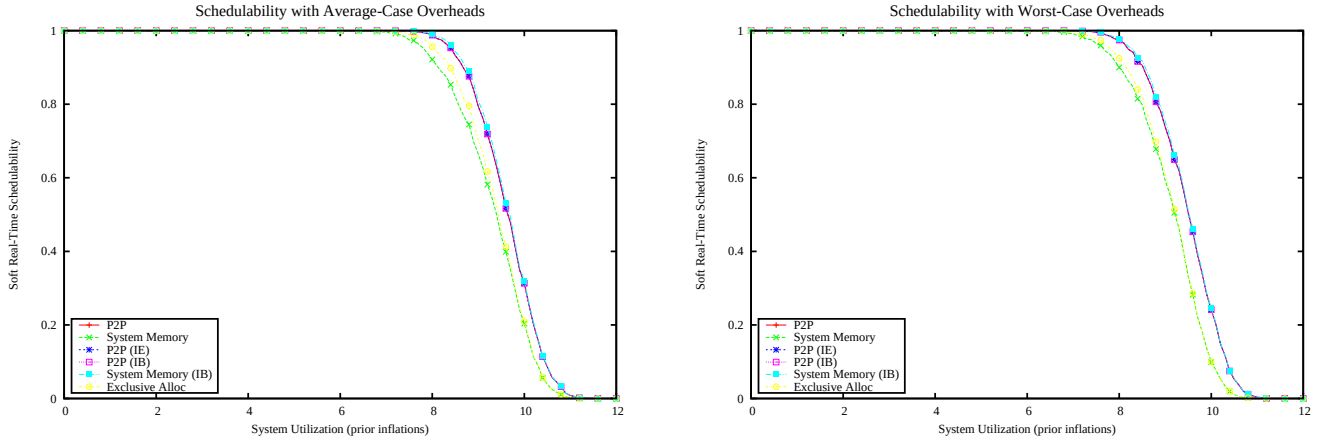

Figure 7747: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

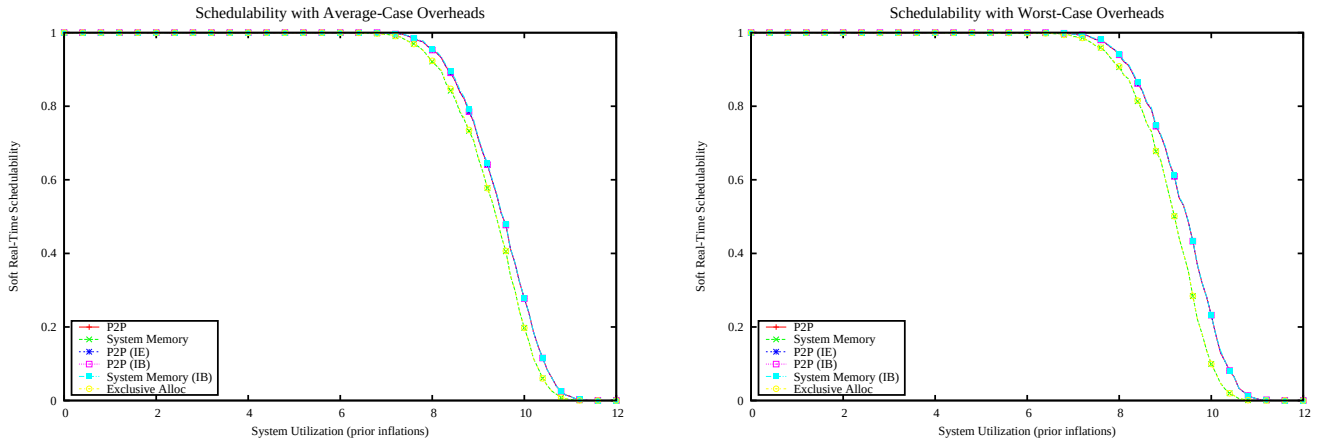

Figure 7748: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [40%,50%]

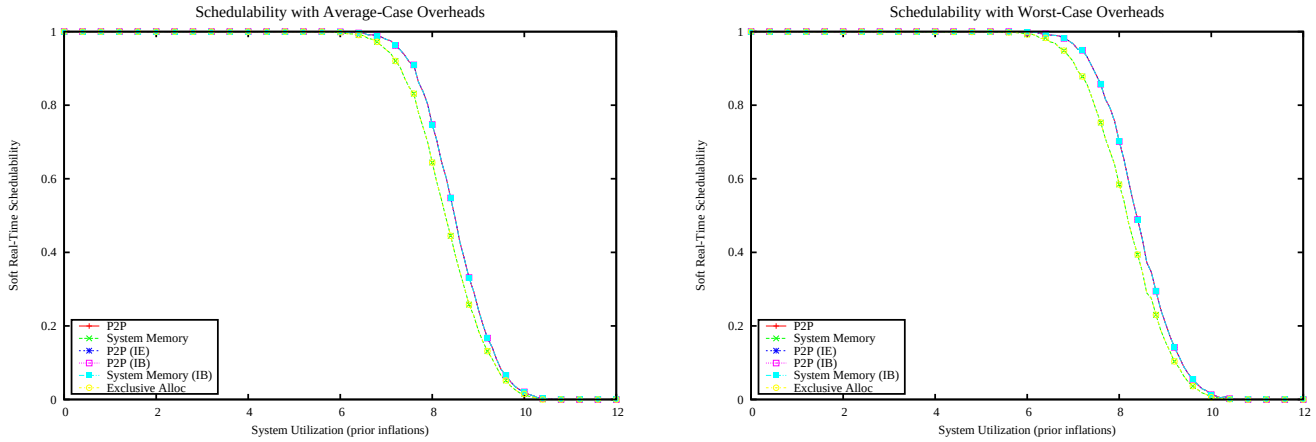

Figure 7749: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

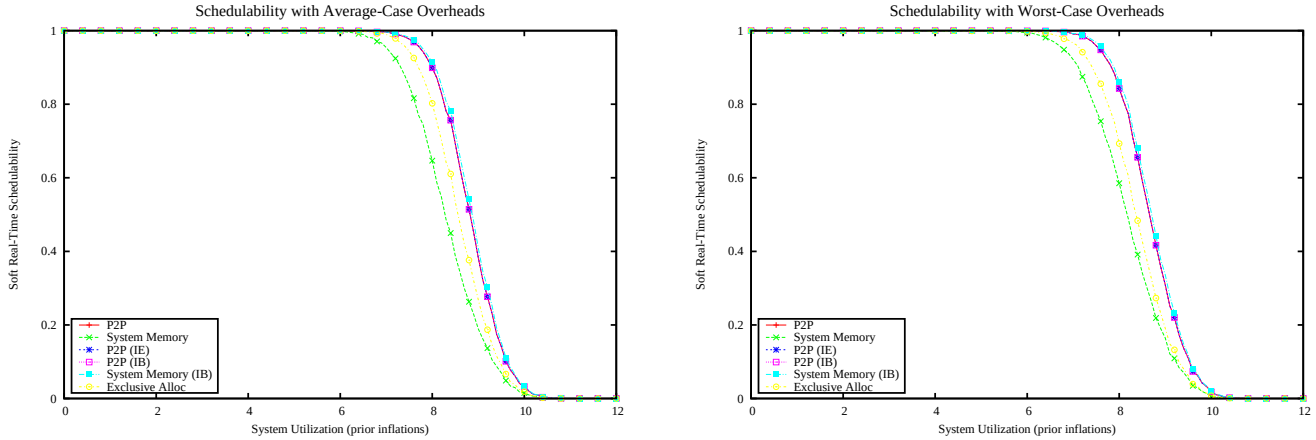

Figure 7750: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

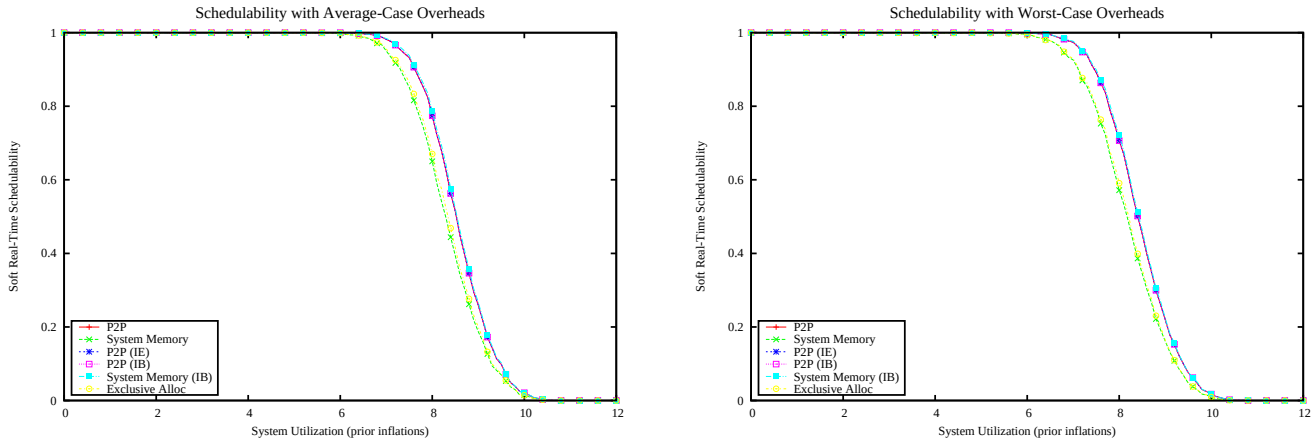

Figure 7751: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [50%,60%]

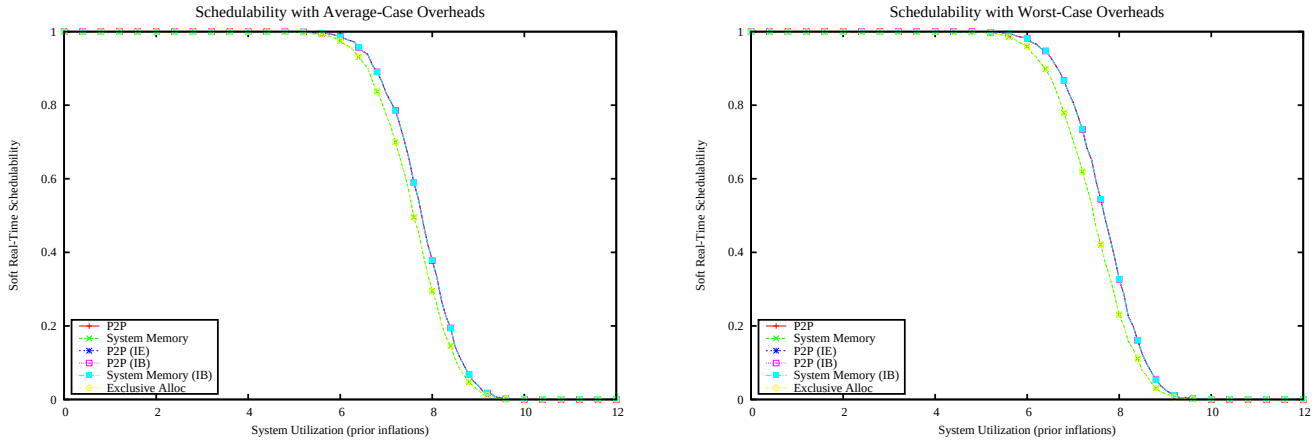

Figure 7752: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

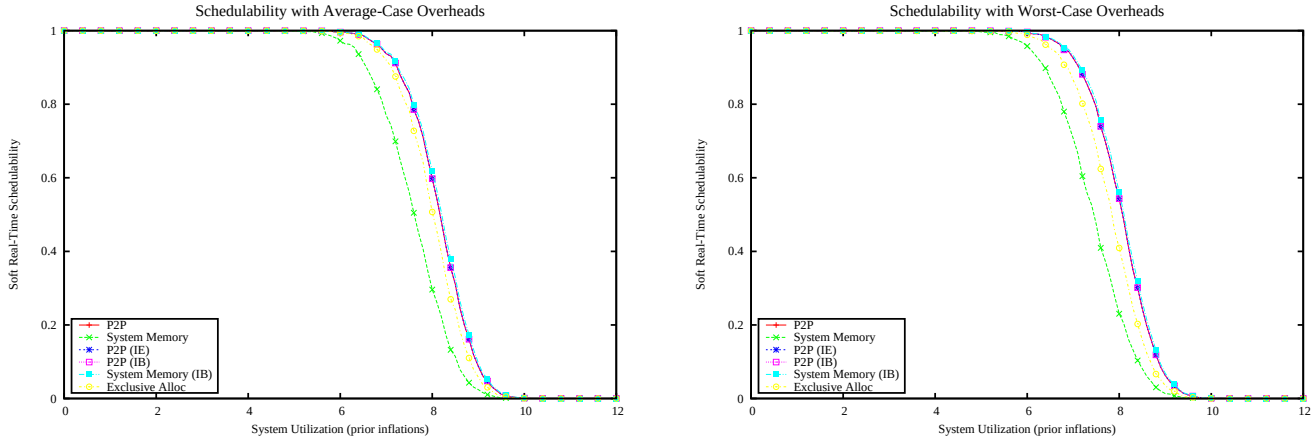

Figure 7753: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

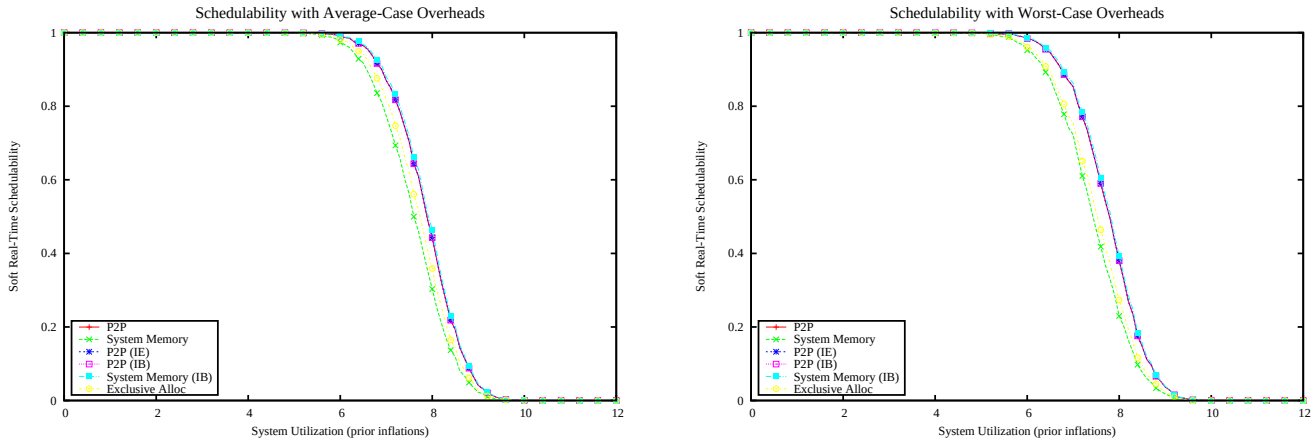

Figure 7754: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [60%,70%]

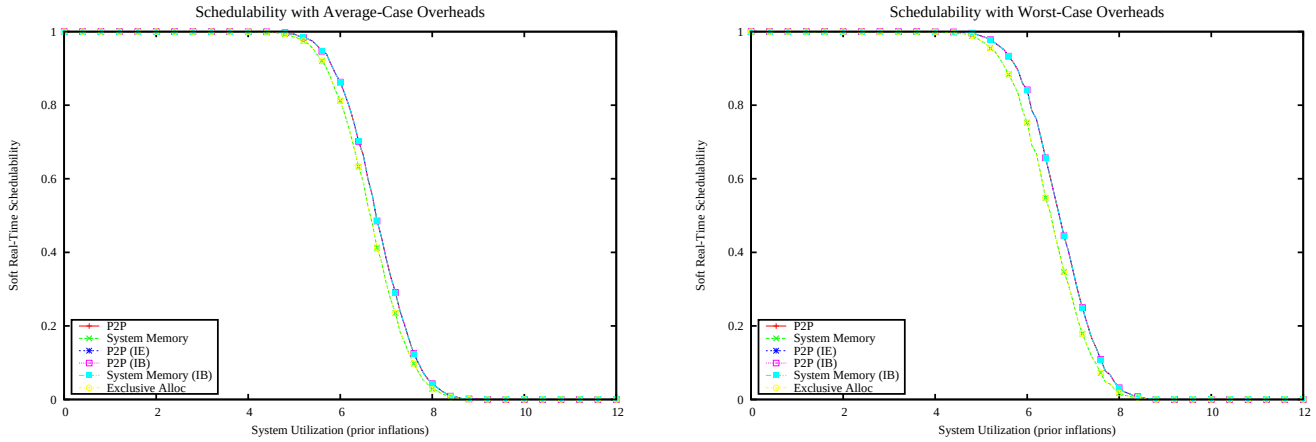

Figure 7755: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

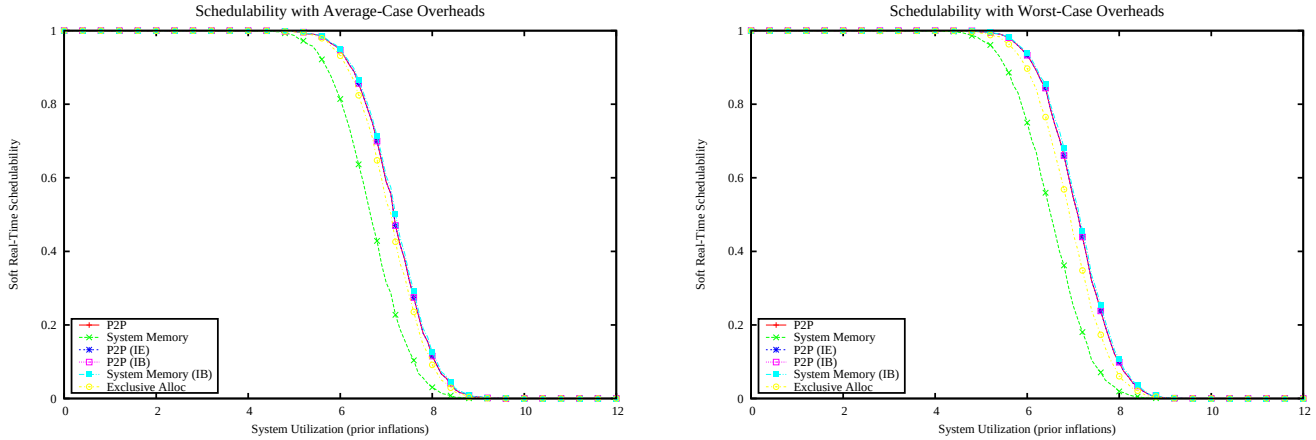

Figure 7756: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

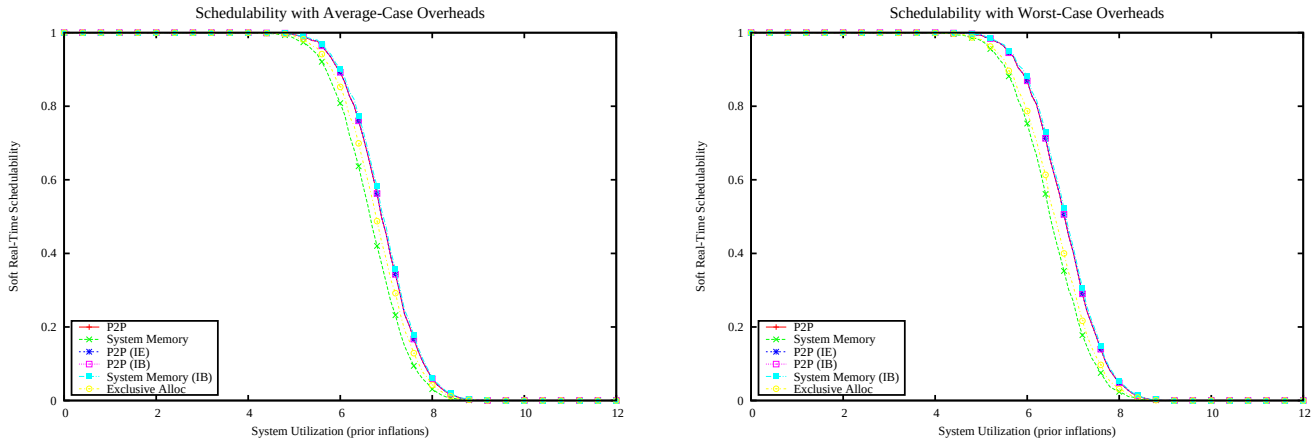

Figure 7757: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [70%,80%]

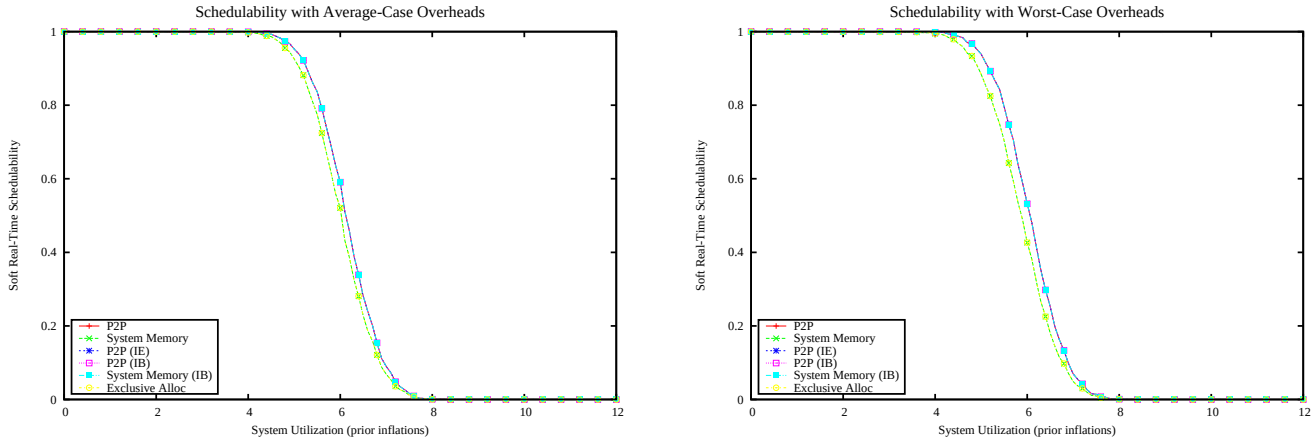

Figure 7758: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

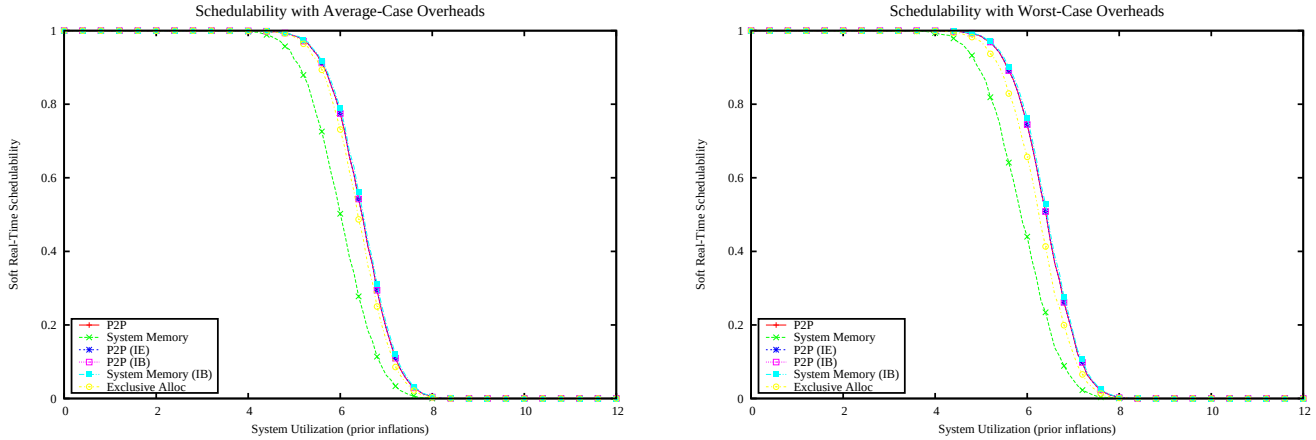

Figure 7759: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

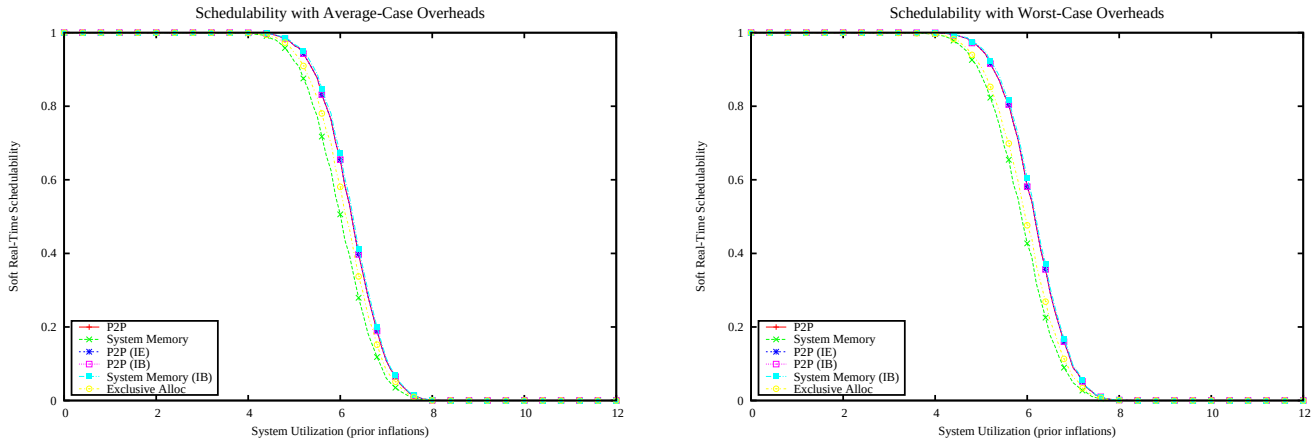

Figure 7760: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [80%,90%]

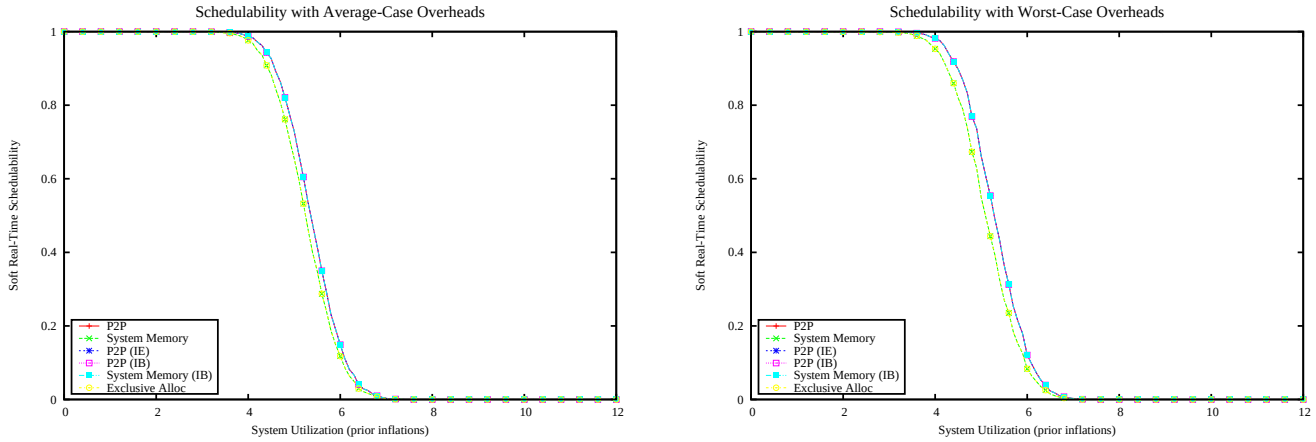

Figure 7761: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

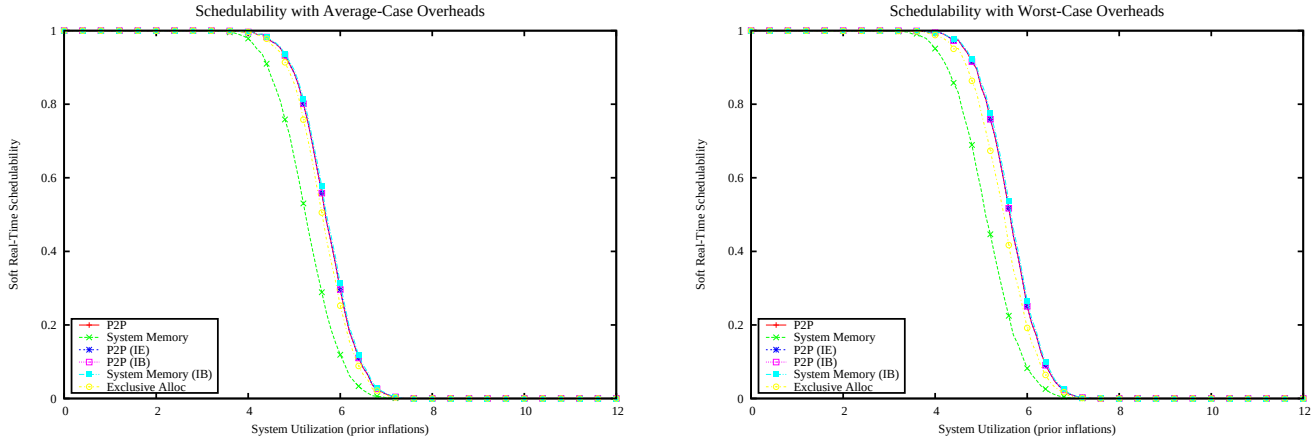

Figure 7762: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

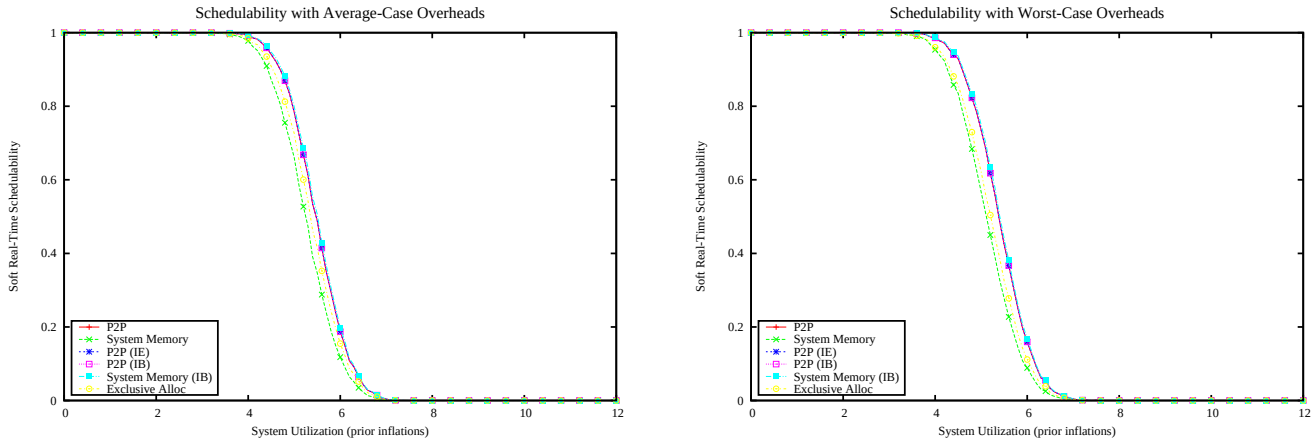

Figure 7763: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 2MB, % of GPU-using tasks range [90%,100%]

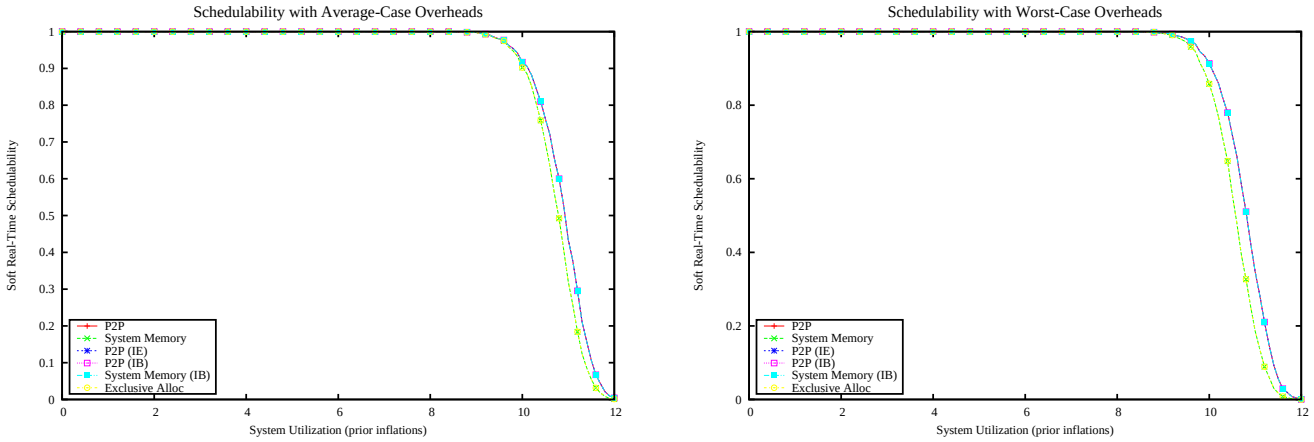

Figure 7764: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

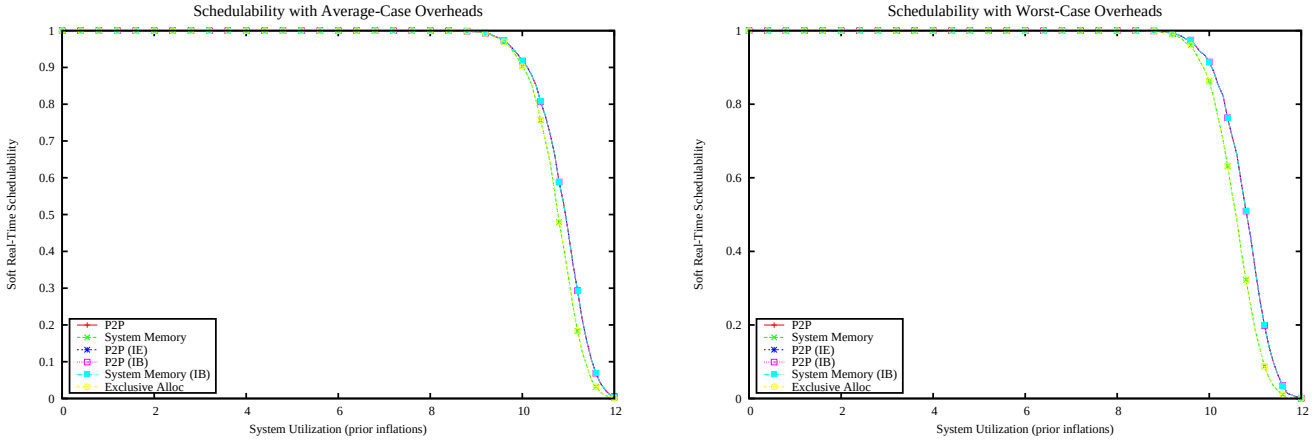

Figure 7765: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

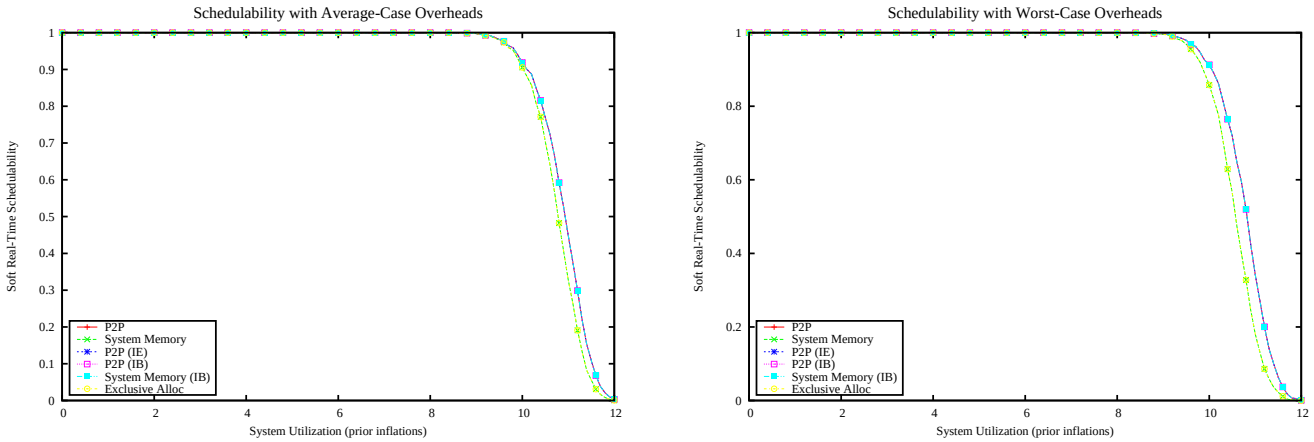

Figure 7766: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [10%,20%]

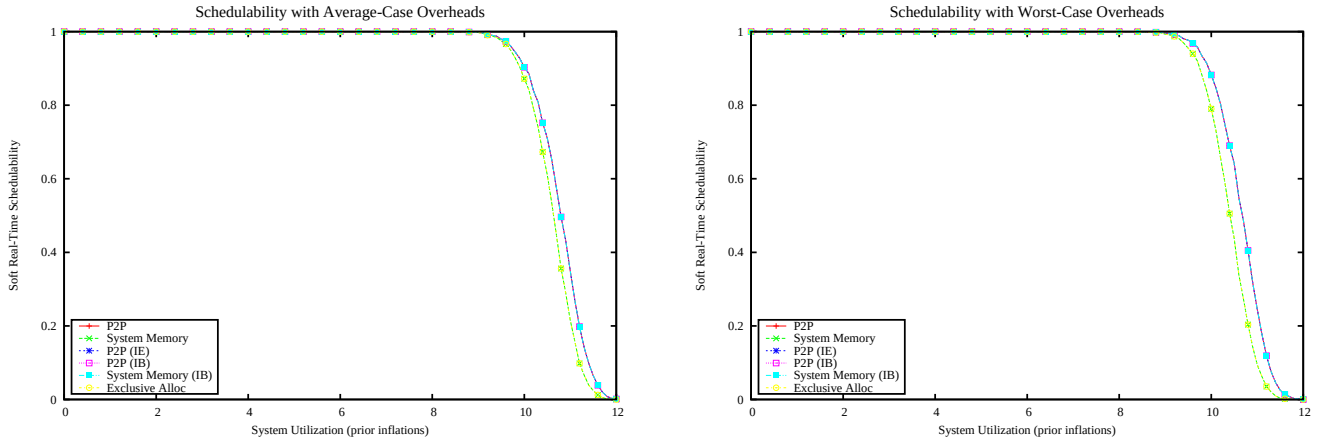

Figure 7767: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

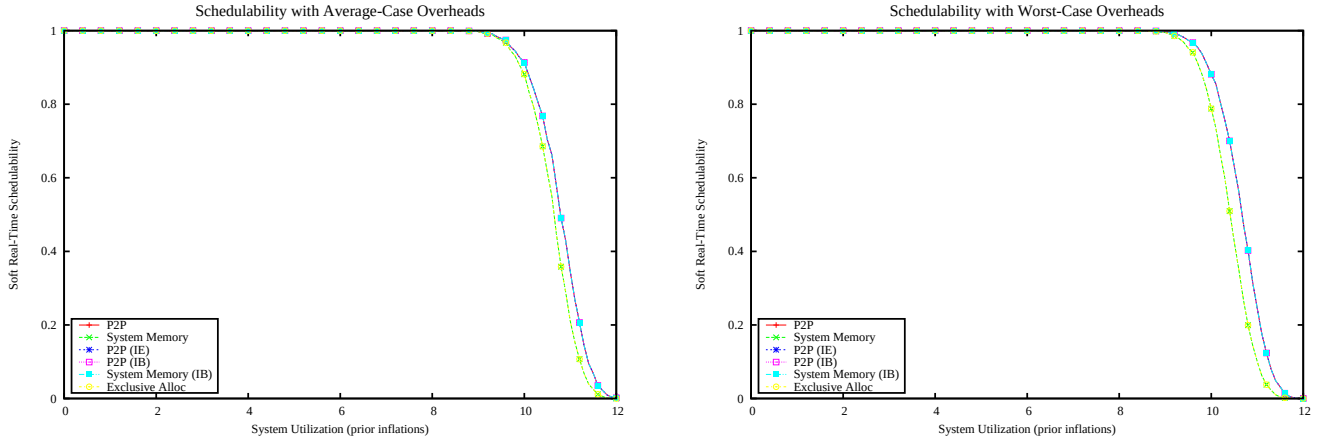

Figure 7768: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

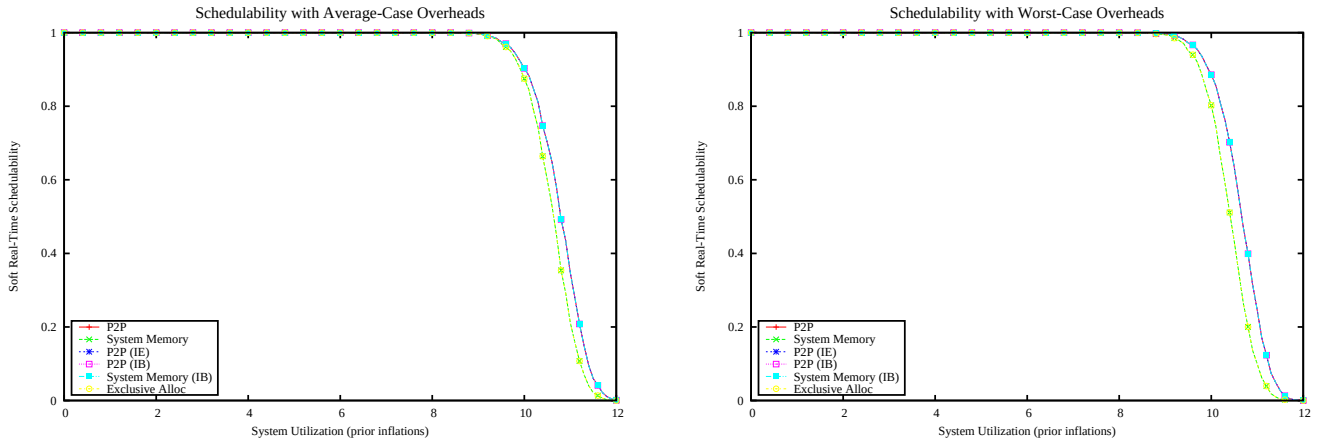

Figure 7769: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [20%,30%]

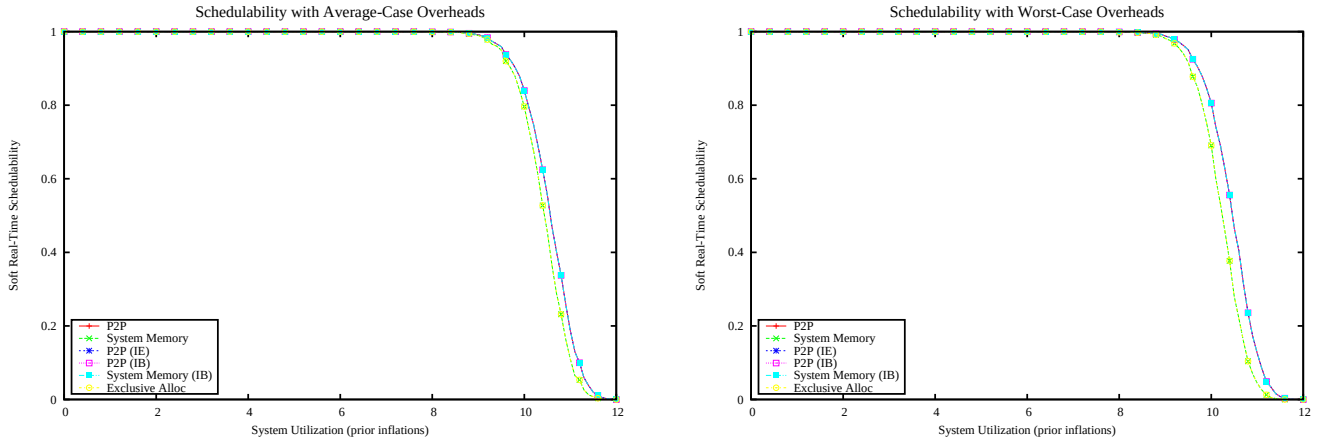

Figure 7770: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

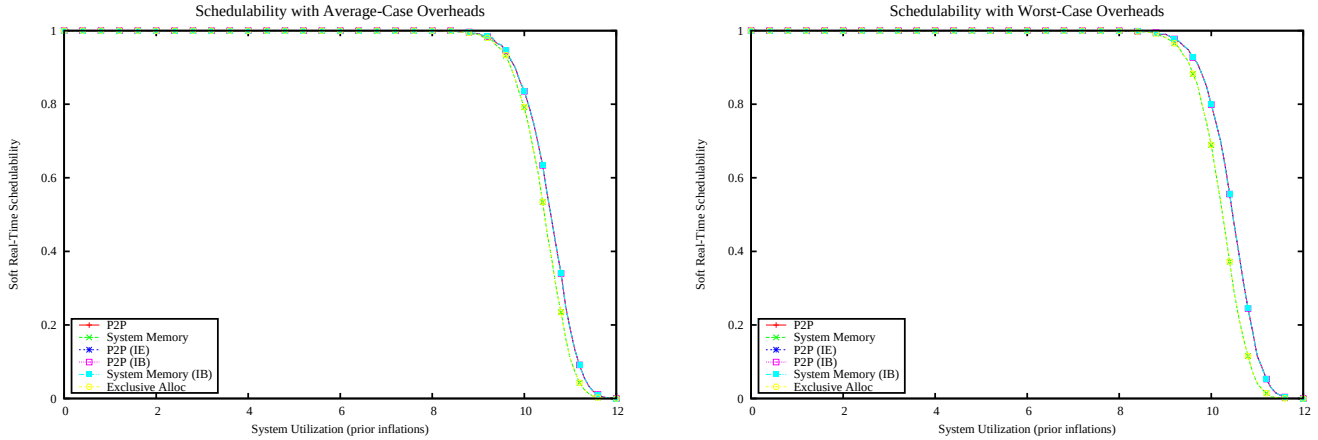

Figure 7771: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

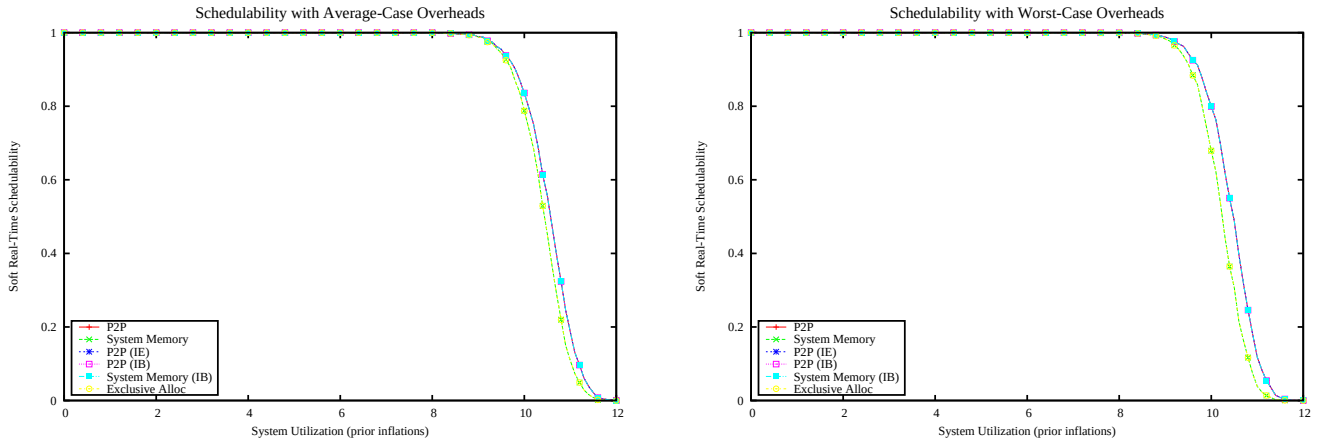

Figure 7772: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [30%,40%]

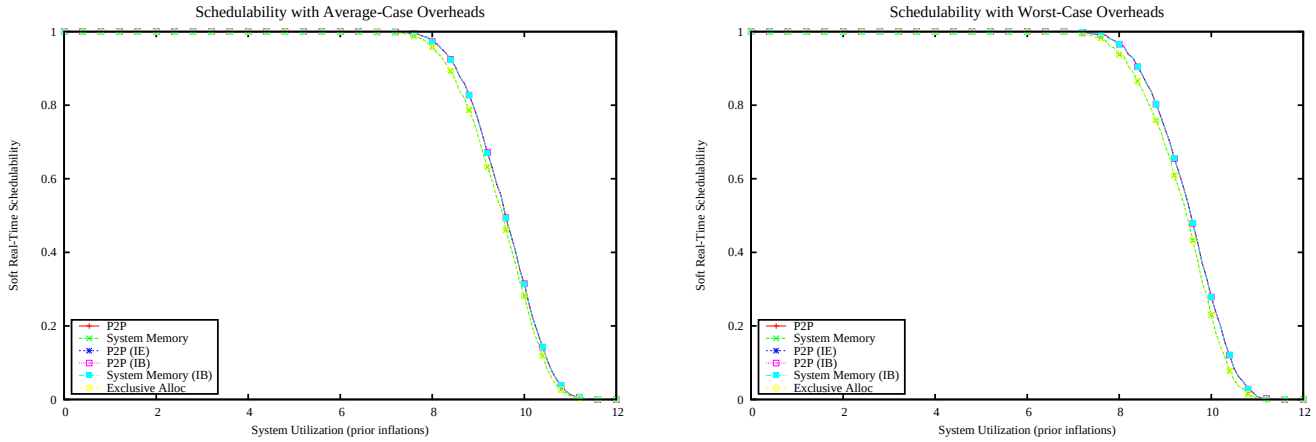

Figure 7773: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

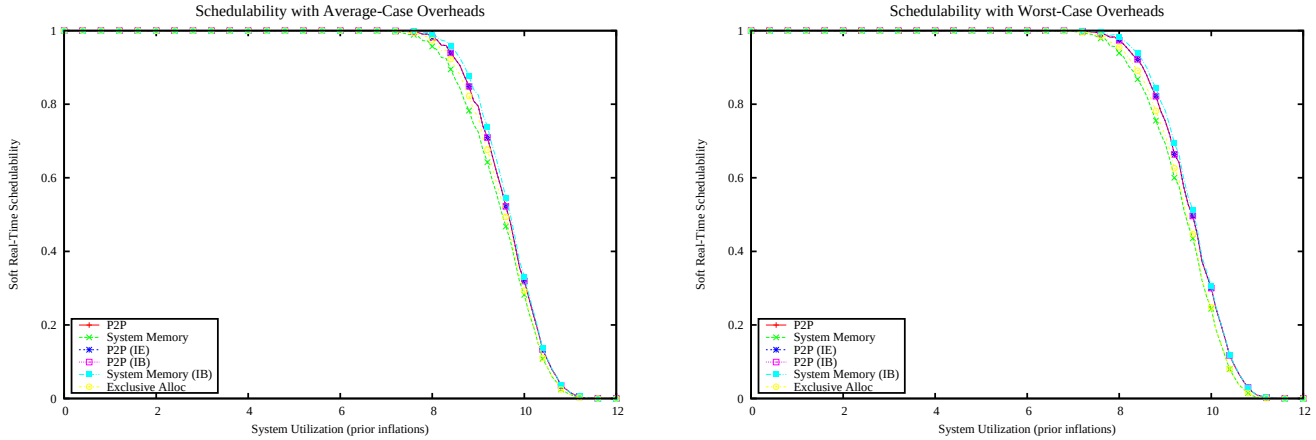

Figure 7774: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

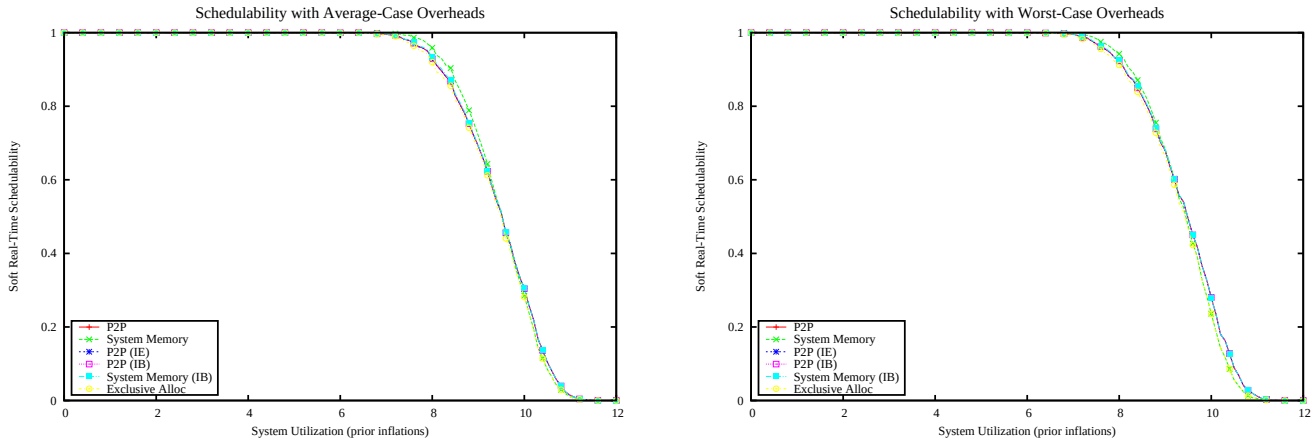

Figure 7775: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [40%,50%]

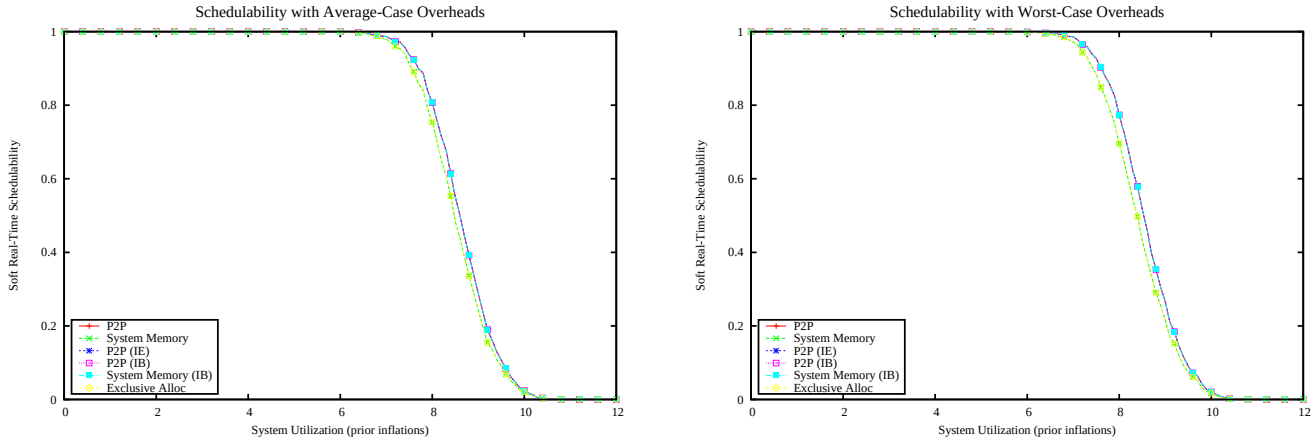

Figure 7776: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

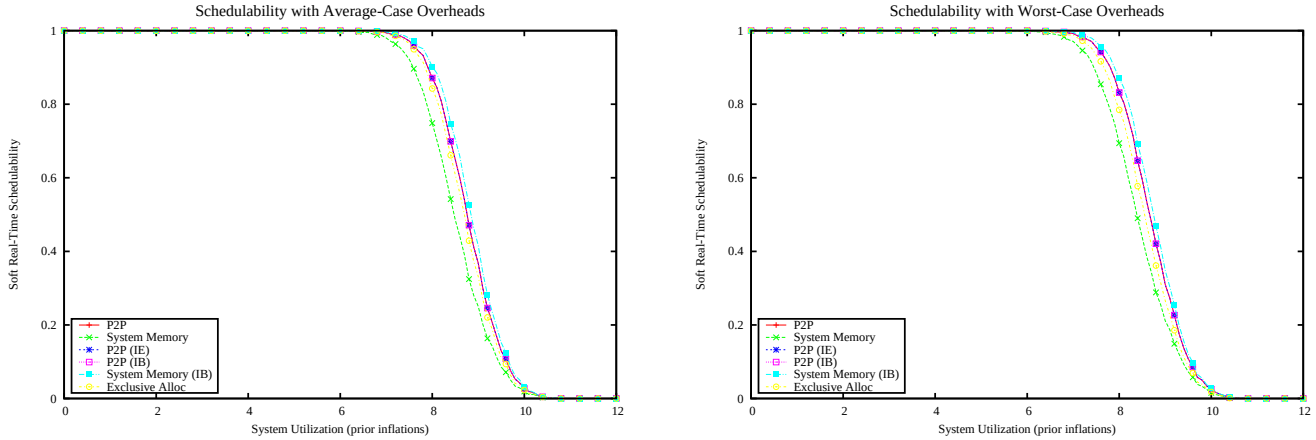

Figure 7777: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

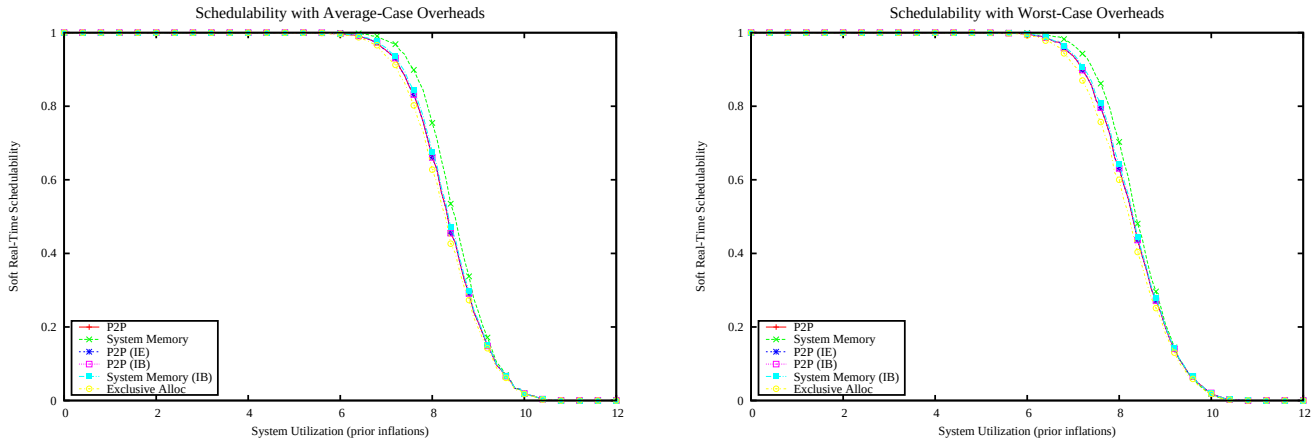

Figure 7778: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [50%,60%]

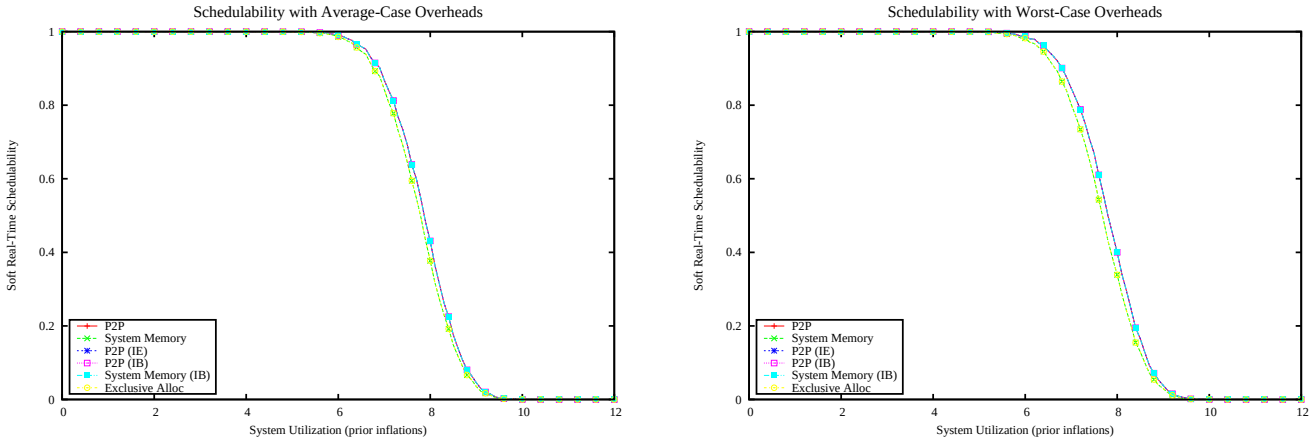

Figure 7779: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

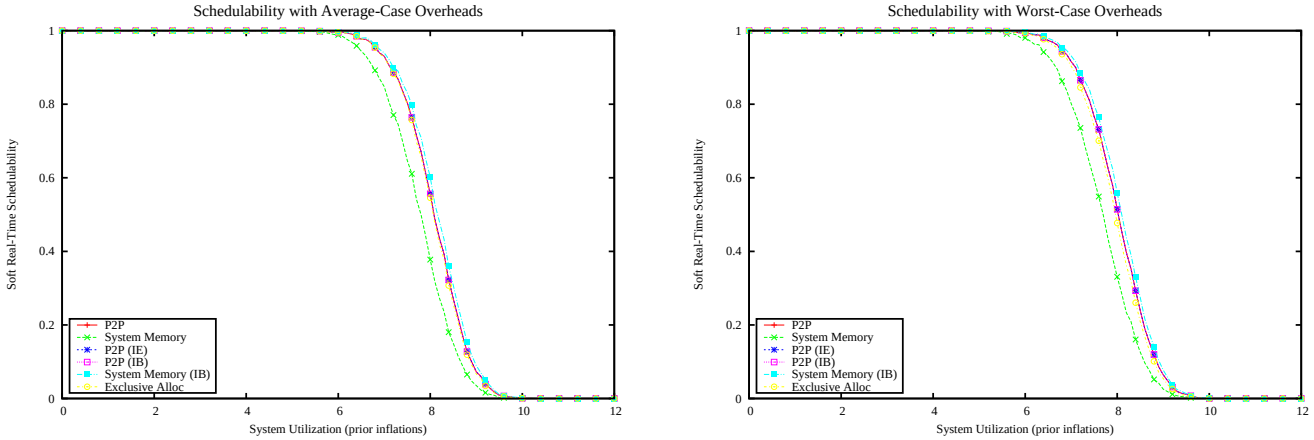

Figure 7780: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

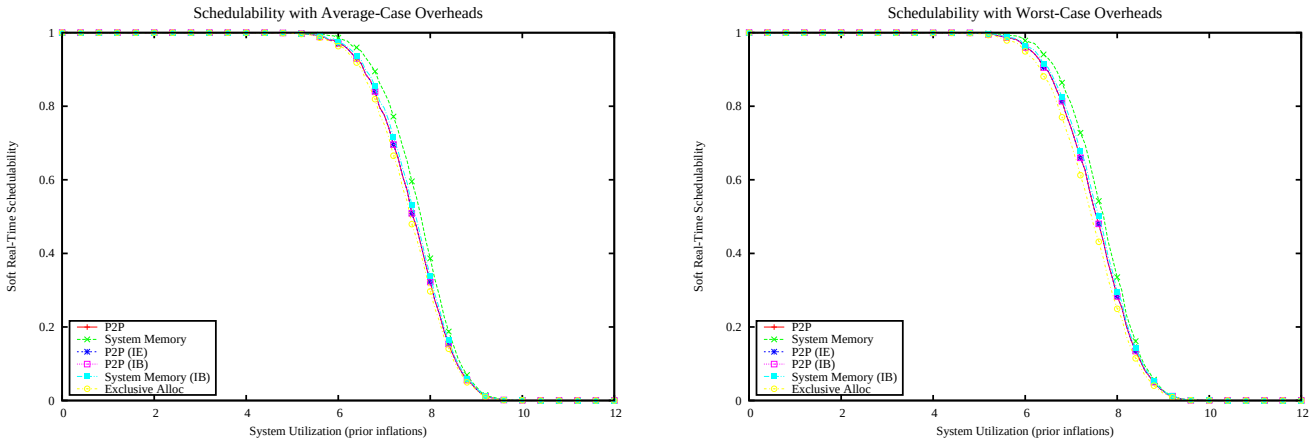

Figure 7781: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [60%,70%]

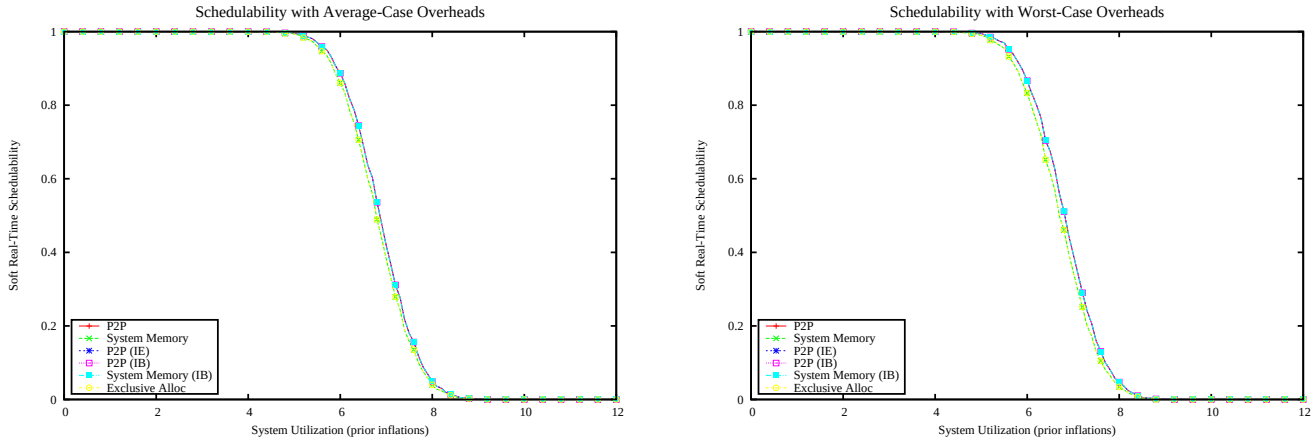

Figure 7782: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

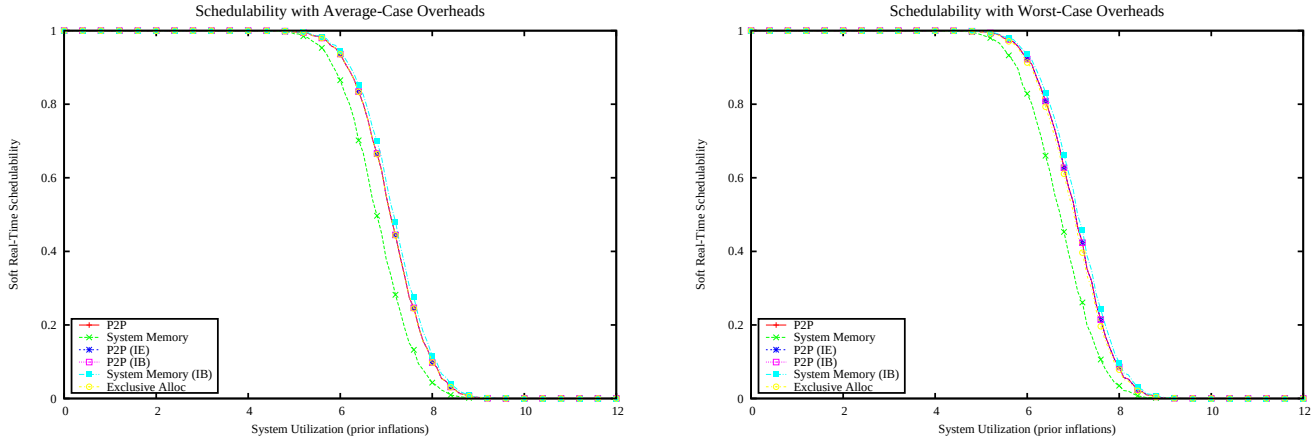

Figure 7783: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

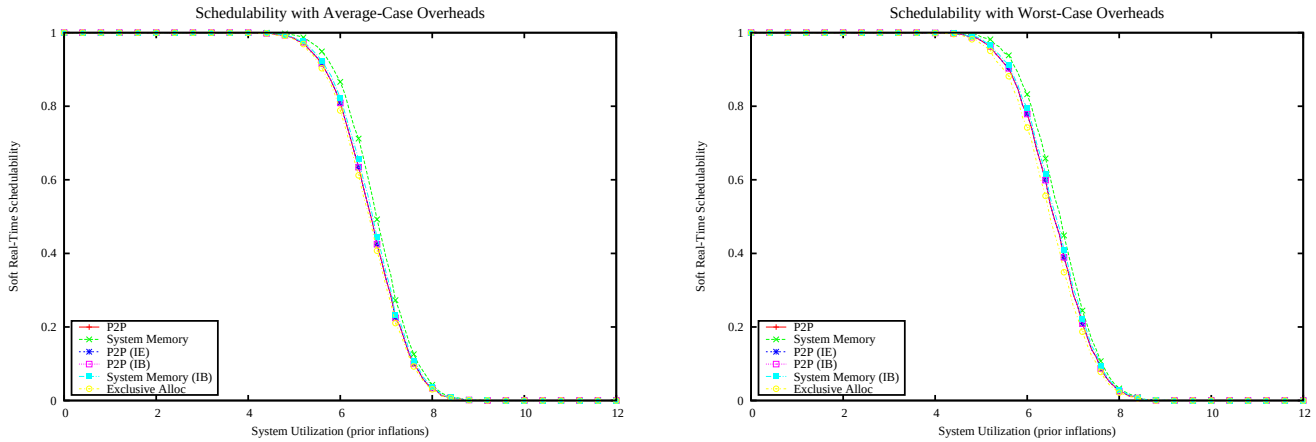

Figure 7784: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [70%,80%]

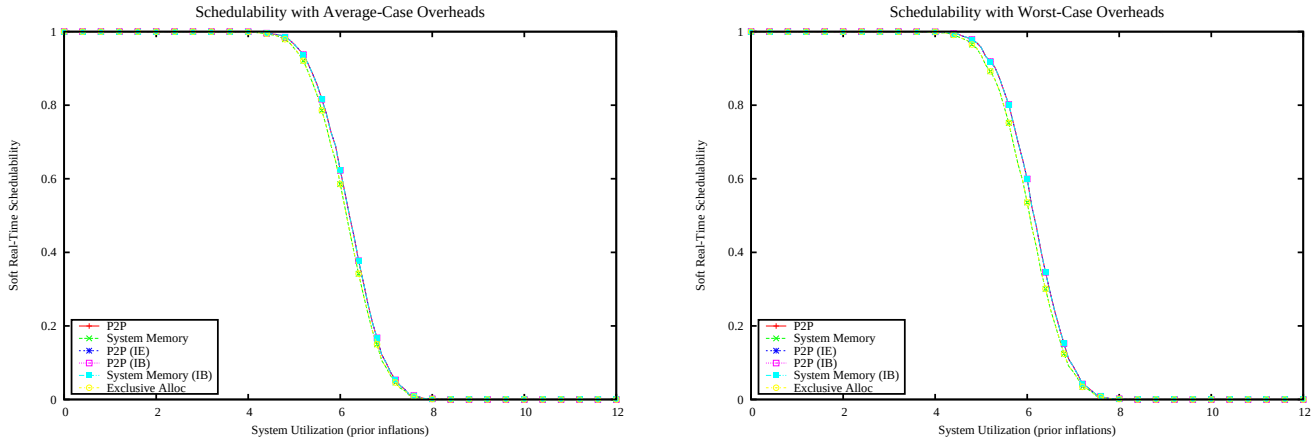

Figure 7785: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

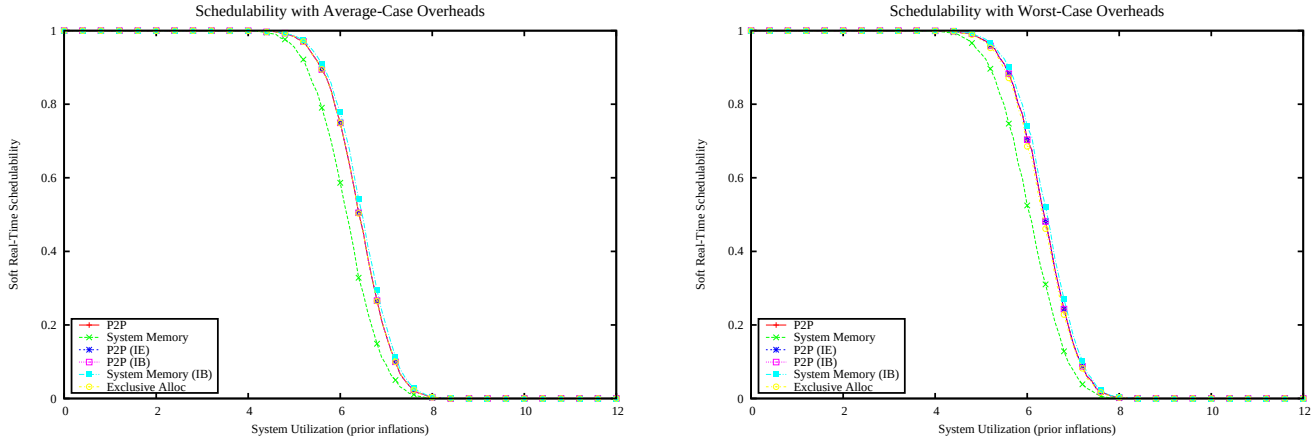

Figure 7786: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

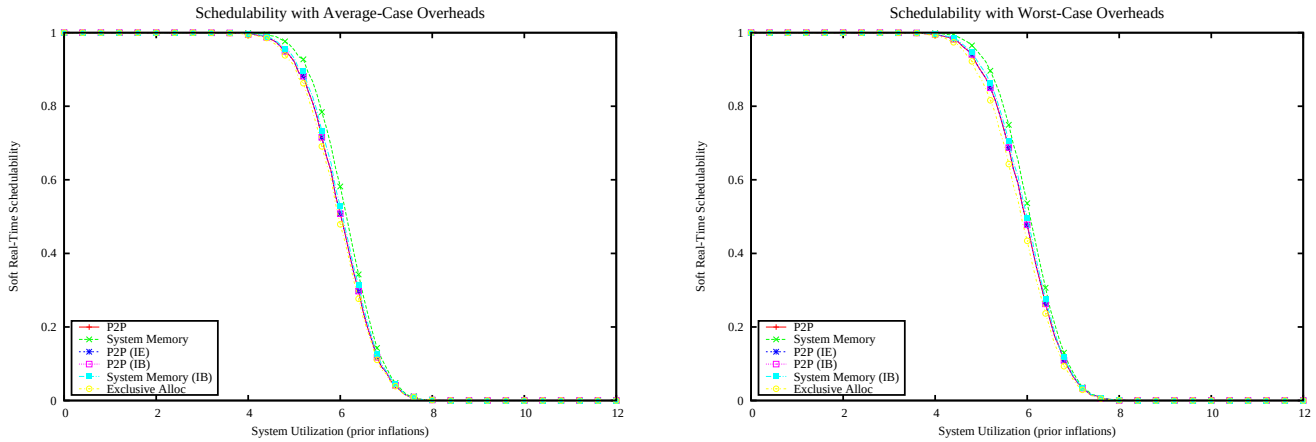

Figure 7787: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [80%,90%]

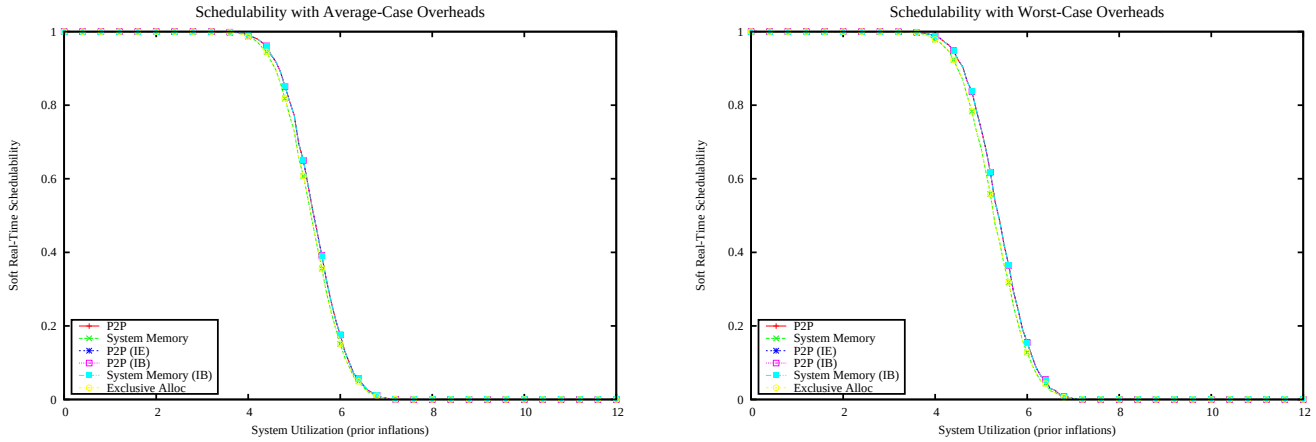

Figure 7788: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 1, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

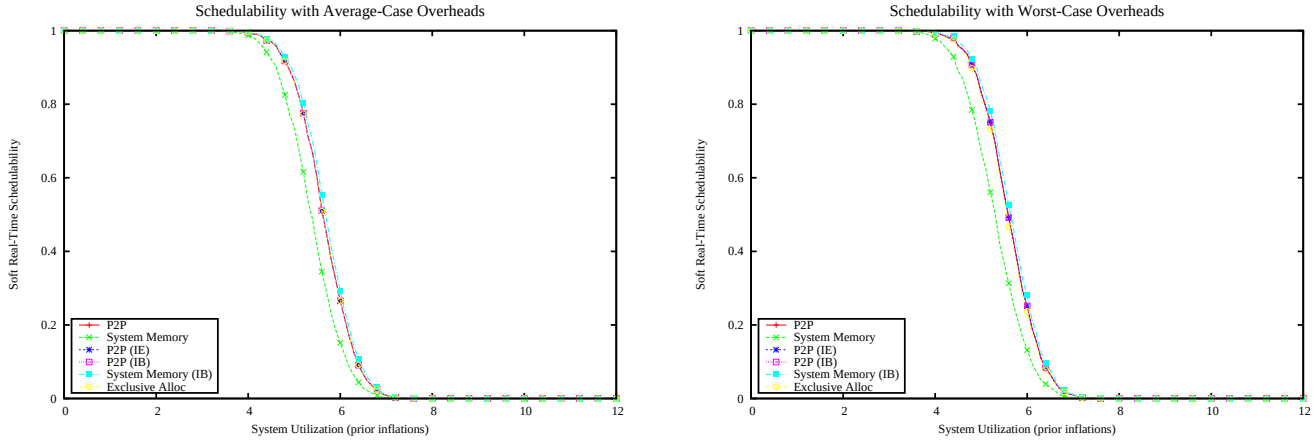

Figure 7789: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 2, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]

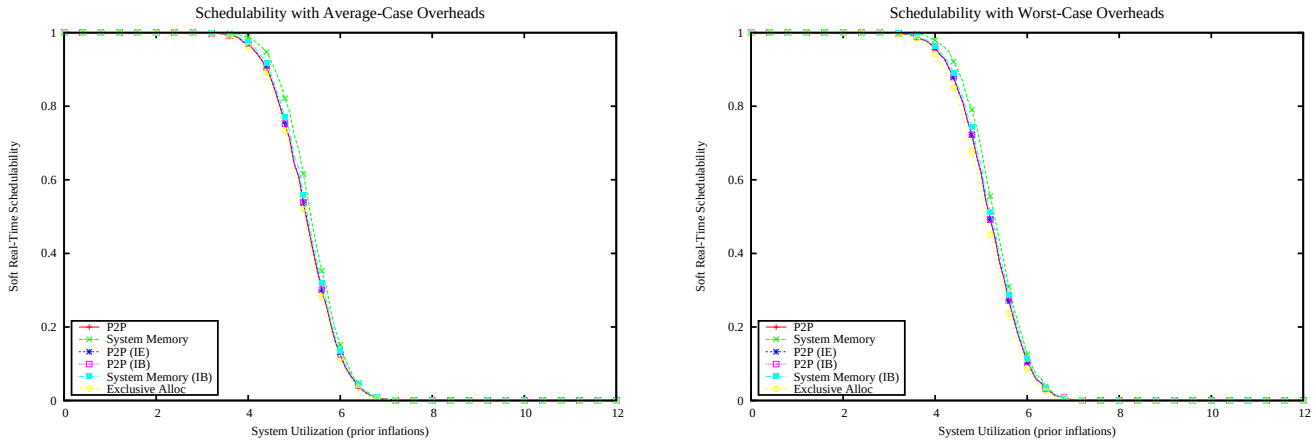

Figure 7790: 12x1 CPU Clusters (partitioned), 8x1 CPU Clusters (partitioned), ρ = 3, Bi-Modal Probability 4/9, Total GPU time % range [25%, 50%], 64MB State, Chunk Size 4MB, % of GPU-using tasks range [90%,100%]