



COMP 110/401

APPENDIX: ENTERING ARGS IN ECLIPSE

Instructor: Prasun Dewan (FB 150, dewan@unc.edu)




PREREQUISITE


- Eclipse



SELECTING DEBUG(RUN CONFIGURATION)

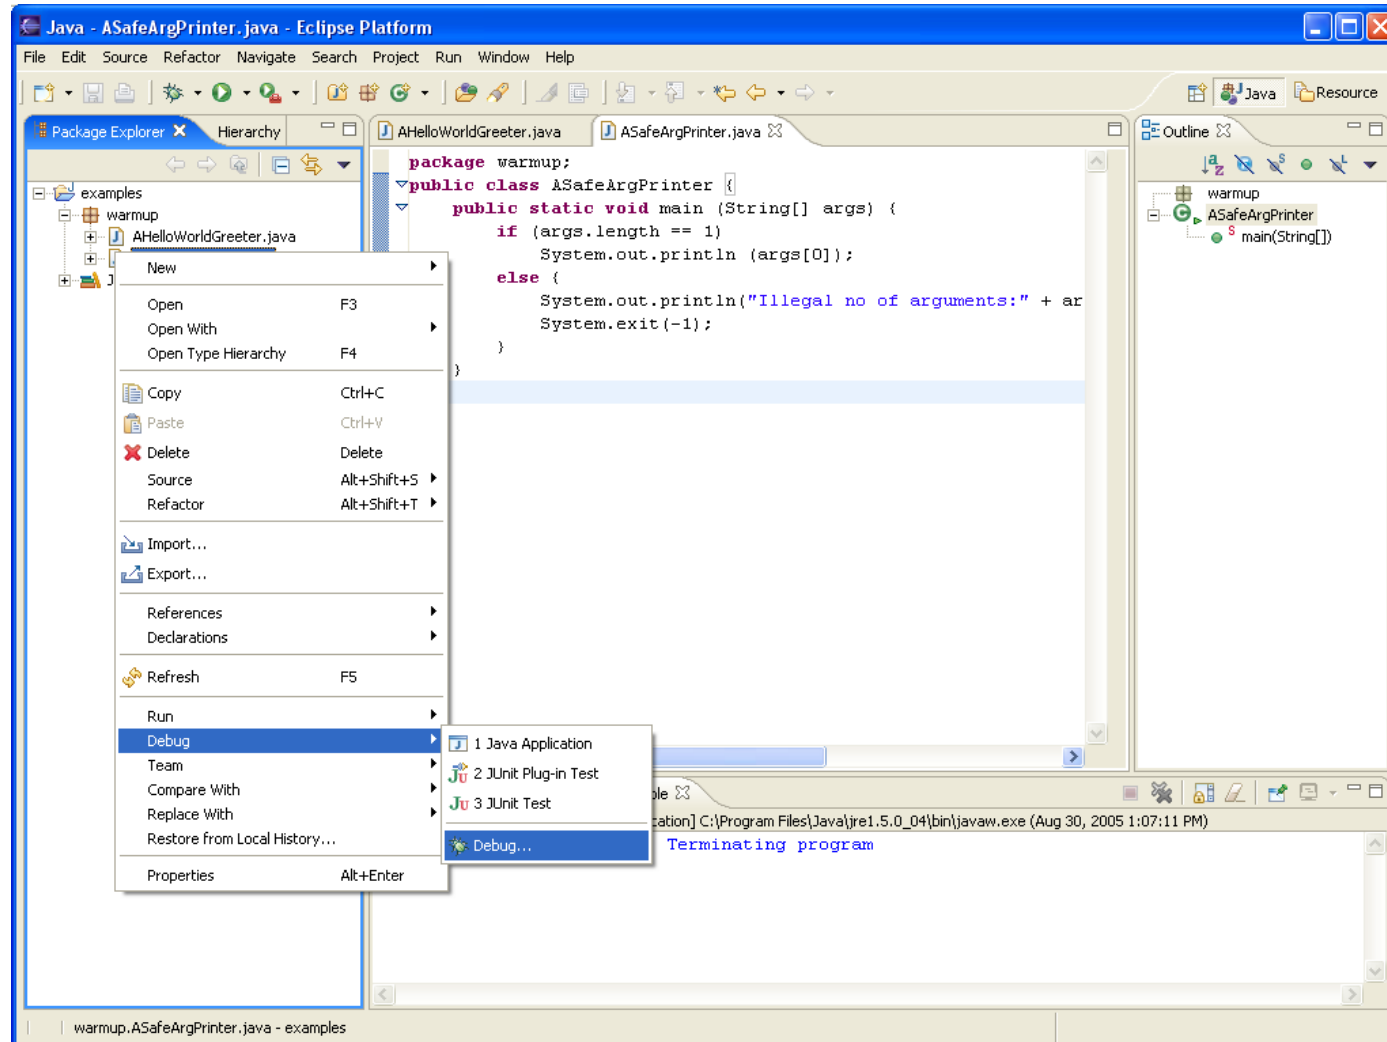


SELECTING MAIN CLASS

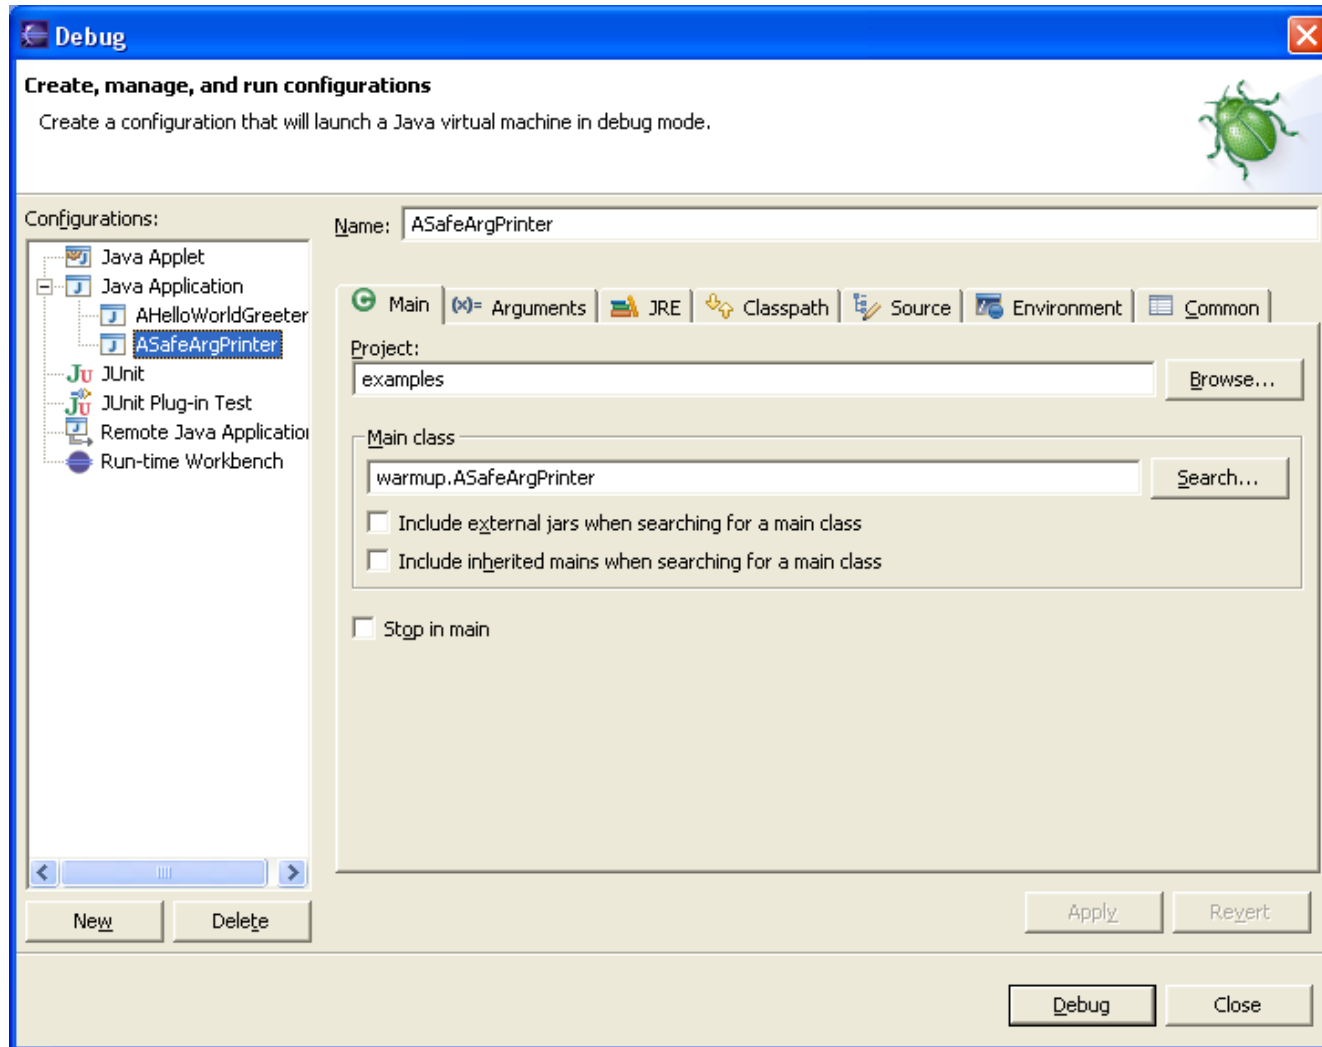

SPECIFYING ARGUMENT IN ARGUMENT TAB

Argument must be in quotes. Args[0] = "Ca Va"

Without quotes Java will make each word a separate argument (args[0] = "Ca", args[1] = "Va")

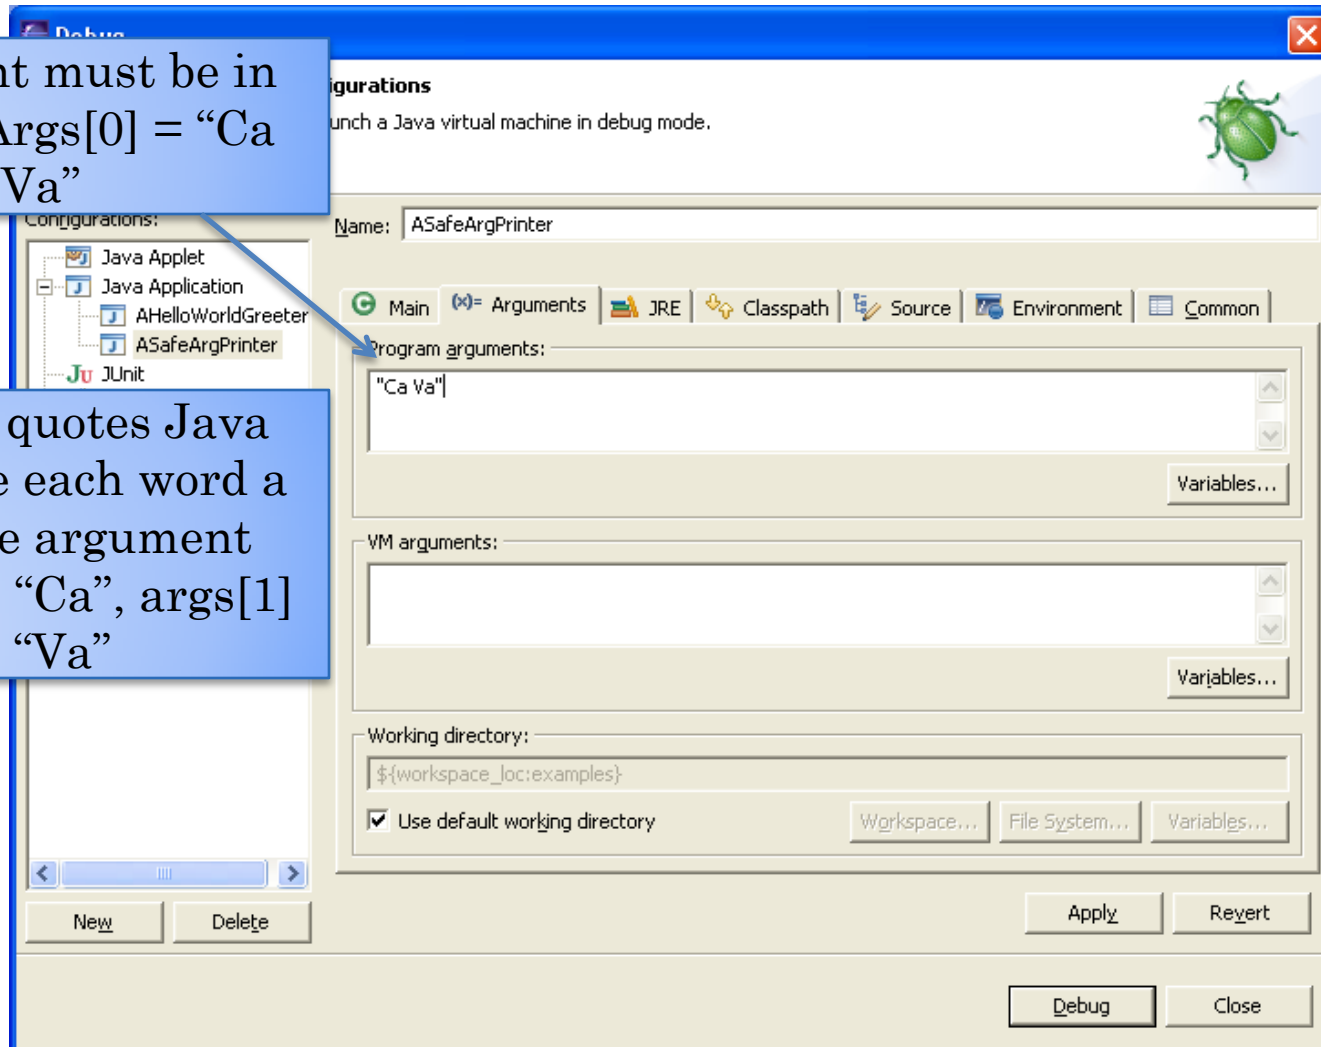

EXECUTING WITH ARG

