

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL


COMP 790: OS Implementation

The Page Cache

Don Porter

1

1

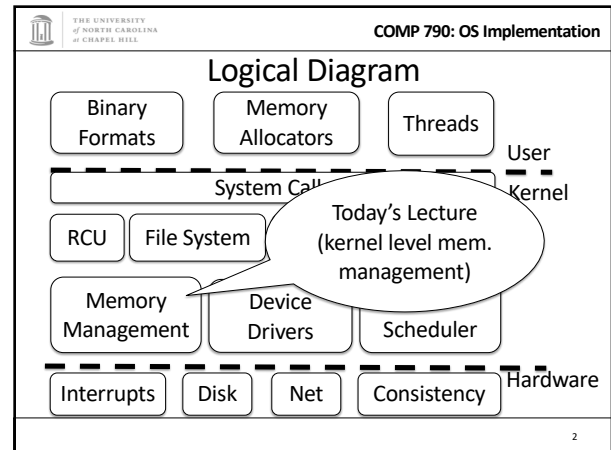

2

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Recap of previous lectures

- Page tables: translate virtual addresses to physical addresses
- VM Areas (Linux): track *what* should be mapped at in the virtual address space of a process
- Hoard/Linux slab: Efficient allocation of *objects* from a superblock/slab of pages

3

3

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Background

- Lab2: Track physical pages with an array of PageInfo structs
 - Contains reference counts
 - Free list layered over this array
- Just like JOS, Linux represents physical memory with an array of page structs
 - Obviously, not the exact same contents, but same idea
- Pages can be allocated to processes, or to cache file data in memory

4

4

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Today's Problem

- Given a VMA or a file's inode, how do I figure out which physical pages are storing its data?
- Next lecture: We will go the other way, from a physical page back to the VMA or file inode

5

5

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

The address space abstraction

- Unifying abstraction:
 - Each file inode has an address space (0—file size)
 - So do block devices that cache data in RAM (0—dev size)
 - The (anonymous) virtual memory of a process has an address space (0—4GB on x86)
- In other words, all page mappings can be thought of as and (object, offset) tuple
 - Make sense?

6

6

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Address Spaces for:

- VM Areas (VMAs)
- Files

7

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Start Simple

- “Anonymous” memory – no file backing it
 - E.g., the stack for a process
- Not shared between processes
 - Will discuss sharing and swapping later
- How do we figure out virtual to physical mapping?
 - Just walk the page tables!
- Linux doesn’t do anything outside of the page tables to track this mapping

8


THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

File mappings

- A VMA can also represent a memory mapped file
- The kernel can also map file pages to service **read()** or **write()** system calls
- Goal: We only want to load a file into memory once!

9

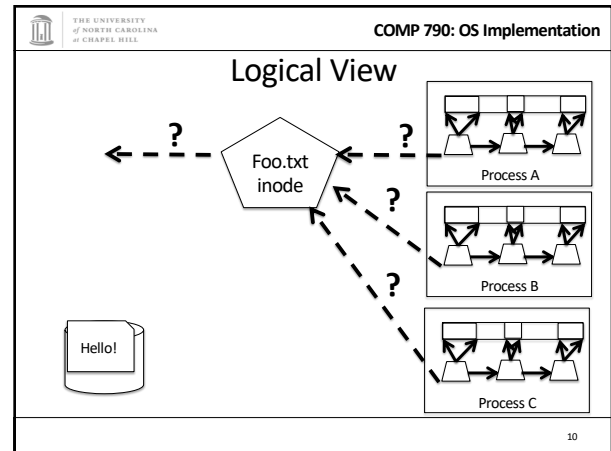


THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

VMA to a file

- Also easy: VMA includes a file pointer and an offset into file
 - A VMA may map only part of the file
 - Offset must be at page granularity
 - Anonymous mapping: file pointer is null
- File pointer is an open file descriptor in the process file descriptor table
 - We will discuss file handles later

11

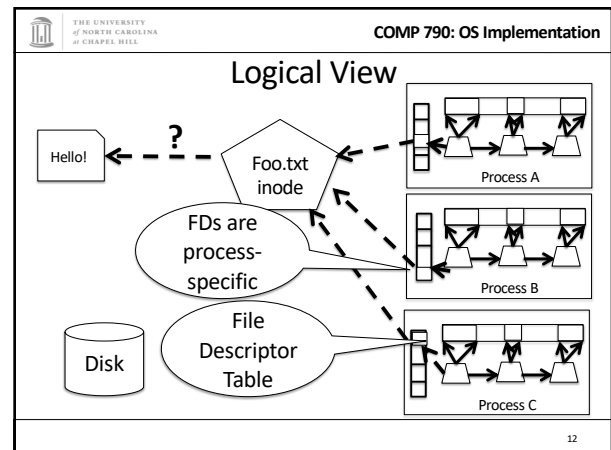

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Tracking file pages

- What data structure to use for a file?
 - No page tables for files
- For example: What page stores the first 4k of file “foo”
- What data structure to use?
 - Hint: Files can be small, or very, very large

13

13

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

The Radix Tree

- A space-optimized trie
 - Trie: Rather than store entire key in each node, traversal of parent(s) builds a prefix, node just stores suffix
 - Especially useful for strings
 - Prefix less important for file offsets, but does bound key storage space
- More important: A tree with a branching factor $k > 2$
 - Faster lookup for large files (esp. with tricks)
- Note: Linux’s use of the Radix tree is constrained

14

14

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

From “Understanding the Linux Kernel”

15

15

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

A bit more detail

- Assume an upper bound on file size when building the radix tree
 - Can rebuild later if we are wrong
- Specifically: Max size is 256k, branching factor (k) = 64
- $256k / 4k \text{ pages} = 64 \text{ pages}$
 - So we need a radix tree of height 1 to represent these pages

16

16

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Tree of height 1

- Root has 64 slots, can be null, or a pointer to a page
- Lookup address X:
 - Shift off low 12 bits (offset within page)
 - Use next 6 bits as an index into these slots ($2^6 = 64$)
 - If pointer non-null, go to the child node (page)
 - If null, page doesn’t exist

17

17

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Tree of height n

- Similar story:
 - Shift off low 12 bits
- At each child shift off 6 bits from middle (starting at 6 * (distance to the bottom – 1) bits) to find which of the 64 potential children to go to
 - Use fixed height to figure out where to stop, which bits to use for offset
- Observations:
 - “Key” at each node implicit based on position in tree
 - Lookup time logarithmic in size of tree
 - In a general-purpose radix tree, may have to check all k children, for higher lookup cost

18

18

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Fixed heights

- If the file size grows beyond max height, must grow the tree
- Relatively simple: Add another root, previous tree becomes first child
- Scaling in height:
 - 1: $2^6(6 \cdot 1) + 12 = 256$ KB
 - 2: $2^6(6 \cdot 2) + 12 = 16$ MB
 - 3: $2^6(6 \cdot 3) + 12 = 1$ GB
 - 4: $2^6(6 \cdot 4) + 12 = 64$ GB
 - 5: $2^6(6 \cdot 5) + 12 = 4$ TB

19


THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Back to address spaces

- Each address space for a file cached in memory includes a radix tree
 - Radix tree is sparse: pages not in memory are missing
- Radix tree also supports tags: such as dirty
 - A tree node is tagged if at least one child also has the tag
- Example: I tag a file page dirty
 - Must tag each parent in the radix tree as dirty
 - When I am finished writing page back, I must check all siblings; if none dirty, clear the parent's dirty tag

20

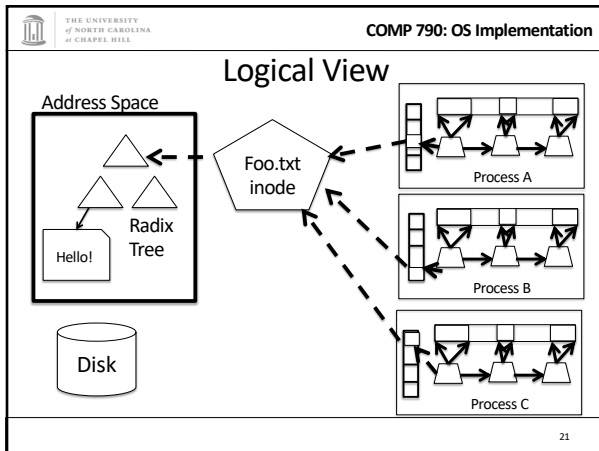

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Recap

- Anonymous page: Just use the page tables
- File-backed mapping
 - VMA \rightarrow open file descriptor \rightarrow inode
 - Inode \rightarrow address space (radix tree) \rightarrow page

22

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Problem 2: Dirty pages

- Most OSes do not write file updates to disk immediately
 - (Later lecture) OS tries to optimize disk arm movement
- OS instead tracks "dirty" pages
 - Ensures that write back isn't delayed too long
 - Least data be lost in a crash
- Application can force immediate write back with sync system calls (and some open/mmap options)

23

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Sync system calls

- sync() – Flush all dirty buffers to disk
- fsync(fd) – Flush all dirty buffers associated with this file to disk (including changes to the inode)
- fdatasync(fd) – Flush only dirty data pages for this file to disk
 - Don't bother with the inode

24

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

How to implement sync?

- Goal: keep overheads of finding dirty blocks low
 - A naïve scan of all pages would work, but expensive
 - Lots of clean pages
- Idea: keep track of dirty data to minimize overheads
 - A bit of extra work on the write path, of course

25

25

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL


COMP 790: OS Implementation

How to implement sync?

- Background: Each file system has a super block
 - All super blocks in a list
- Each super block keeps a list of dirty inodes
- Inodes and superblocks both marked dirty upon use

26

26

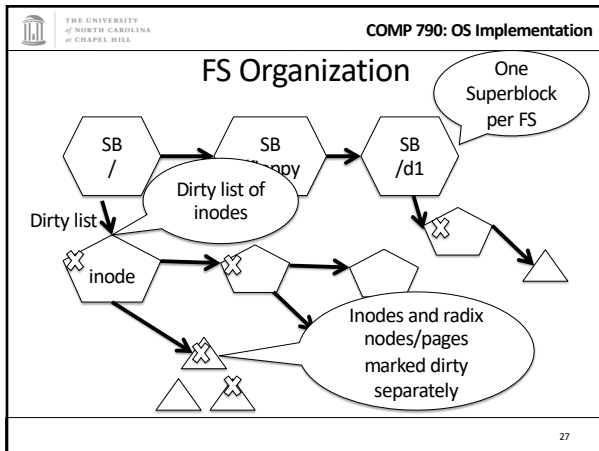

27

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Simple traversal

```

for each s in superblock list:
    if (s->dirty) writeback s
    for i in inode list:
        if (i->dirty) writeback i
        if (i->radix_root->dirty) :
            // Recursively traverse tree writing
            // dirty pages and clearing dirty flag
  
```

28

28

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Asynchronous flushing

- Kernel thread(s): pdflush
 - A kernel thread is a task that only runs in the kernel's address space
 - 2-8 threads, depending on how busy/idle threads are
- When pdflush runs, it is given a target number of pages to write back
 - Kernel maintains a total number of dirty pages
 - Administrator configures a target dirty ratio (say 10%)

29

29

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

pdflush

- When pdflush is scheduled, it figures out how many dirty pages are above the target ratio
- Writes back pages until it meets its goal or can't write more back
 - (Some pages may be locked, just skip those)
- Same traversal as sync() + a count of written pages
 - Usually quits earlier

30

30

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

How long dirty?

- Linux has some inode-specific bookkeeping about when things were dirtied
- pdflush also checks for any inodes that have been dirty longer than 30 seconds
 - Writes these back even if quota was met
- Not the strongest guarantee I've ever seen...

31

31

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

But where to write?

- Ok, so I see how to find the dirty pages
- How does the kernel know where on disk to write them?
 - And which disk for that matter?
- Superblock tracks device
- Inode tracks mapping from file offset to sector

32

32

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Block size mismatch

- Many disks have 512 byte blocks; pages are generally 4K
 - Many newer disks have 4K blocks
 - Per page in cache – usually 8 disk blocks
- When blocks don't match, what do we do?
 - Simple answer: Just write all 8!
 - But this is expensive – if only one block changed, we only want to write one block back

33

33

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Buffer head

- Simple idea: for every page backed by disk, store an extra data structure for each disk block, called a `buffer_head`
- If a page stores 8 disk blocks, it has 8 buffer heads
- Example: `write()` system call for first 5 bytes
 - Look up first page in radix tree
 - Modify page, mark dirty
 - Only mark first buffer head dirty

34

34

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

From "Understanding the Linux Kernel"

Figure 15-2. A buffer page including four buffers and their buffer heads

35

35

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL


COMP 790: OS Implementation

More on buffer heads

- On write-back (`sync`, `pdflush`, etc), only write dirty buffer heads
- To look up a given disk block for a file, must divide by buffer heads per page
 - Ex: disk block 25 of a file is in page 3 in the radix tree
- Note: memory mapped files mark all 8 `buffer_heads` dirty. Why?
 - Can only detect write regions via page faults

36

36

THE UNIVERSITY
of NORTH CAROLINA
at CHAPEL HILL

COMP 790: OS Implementation

Summary

- Seen how mappings of files/disks to cache pages are tracked
 - And how dirty pages are tagged
 - Radix tree basics
- When and how dirty data is written back to disk
- How difference between disk sector and page sizes are handled

37